



RF MEASUREMENT REPORT

FCC ID: Q9DAPIN0755

Applicant: Hewlett Packard Enterprise Company

Product: ACCESS POINT

Model No.: APIN0755

Trademark: 
Hewlett Packard
Enterprise

FCC Classification: 15E 6 GHz Low Power Indoor Access Point (6ID)

FCC Rule Part(s): Part 15 Subpart E (Section 15.407)

Result: Complies

Received Date: 2024-03-29

Test Date: 2024-04-18 ~ 2024-06-26
2025-11-17 ~ 2025-12-05

Reviewed By:

Jame Yuan

Jame Yuan

Approved By:

Robin Wu

Robin Wu



The test results relate only to the samples tested.

This equipment has been shown to be capable of compliance with the applicable technical standards as indicated in the measurement report. Testing was performed in accordance with the applicable measurement procedures. The test results reported herein apply only to the specific item(s) tested.

The test report shall not be reproduced except in full without the written approval of MRT Technology (Suzhou) Co., Ltd.

Revision History

Report No.	Version	Description	Issue Date	Note
R25S1044103-U204	V01	Initial Report	2026-01-29	Valid

Note: This product has already obtained FCC certification, with FCC ID: Q9DAPIN0755. The original test report number is 2403RSU068-U6 (default Group 1). The product has now added additional RF modes, Group 2 and Group 3, through software updates. All the test data in the report are done by assessing Radio 0 6 GHz LB and Radio 2 6 GHz HB (Group 3).

Wireless Group	Radio 2	Radio 0	Radio 1
Group 1	6 GHz FB	5 GHz FB	2.4 GHz FB
Group 2	6 GHz FB	5 GHz HB	5 GHz LB
Group 3	6 GHz HB	6 GHz LB	5 GHz FB

Notes:

- The original report No.2403RSU68-U6 had incorrect radio definitions. This has been corrected in this current report.
- Group 1 Radio 2 operating in the 6 GHz FB covers Group 2 Radio 2 operating in the 6 GHz FB.

Radio	Filter	Specification
2	6 GHz WB	6265 - 7095 MHz
2	6 GHz NB	5955 - 6265 MHz
2	6 GHz HB	6535 - 7095 MHz
0	6 GHz LB	5955 - 6425 MHz
0	5 GHz LB	5150 - 5350 MHz
0	5 GHz HB	5470 - 5895 MHz
1	5 GHz LB	5150 - 5350 MHz
1	5 GHz HB	5470 - 5895 MHz

Notes:

- 6 GHz Full Band = 6 GHz WB + 6 GHz NB, based on channel selection.
- 5 GHz Full Band = 5 GHz LB + 5 GHz HB, based on channel selection.

CONTENTS

Description	Page
1. General Information	6
1.1. Applicant	6
1.2. Manufacturer	6
1.3. Testing Facility	6
1.4. Product Information.....	7
1.5. Radio Specification under Test	7
1.6. Working Frequencies	8
1.7. Description of Antenna RF Port	10
1.8. Description of Operating Paths.....	11
1.9. Antenna Details.....	11
2. Test Configuration	12
2.1. Test Mode.....	12
2.2. Test System Connection Diagram	13
2.3. Test Software	13
2.4. Applied Standards.....	13
2.5. Test Environment Condition	14
3. Antenna Requirements	15
4. Measuring Instrument	16
5. Decision Rules and Measurement Uncertainty	20
5.1. Decision Rules	20
5.2. Measurement Uncertainty.....	20
6. Test Result.....	22
6.1. Summary	22
6.2. 26 dB Bandwidth Measurement.....	23
6.2.1. Test Limit	23
6.2.2. Test Procedure	23
6.2.3. Test Setting	23
6.2.4. Test Setup	24
6.2.5. Test Result	24
6.3. Output Power Measurement.....	25
6.3.1. Test Limit	25
6.3.2. Test Procedure	25
6.3.3. Test Setting	25
6.3.4. Test Setup	26
6.3.5. Test Result	26

6.4.	Power Spectral Density Measurement	27
6.4.1.	Test Limit	27
6.4.2.	Test Procedure	27
6.4.3.	Test Setting	27
6.4.4.	Test Setup	28
6.4.5.	Test Result	28
6.5.	In-Band Emission Measurement.....	29
6.5.1.	Test Limit	29
6.5.2.	Test Procedure	29
6.5.3.	Test Setting	29
6.5.4.	Test Setup	30
6.5.5.	Test Result	30
6.6.	Frequency Stability Measurement	31
6.6.1.	Test Limit	31
6.6.2.	Test Procedure	31
6.6.3.	Test Setup	31
6.6.4.	Test Result	32
6.7.	Contention Based Protocol Measurement.....	33
6.7.1.	Test Limit	33
6.7.2.	Test Procedure	33
6.7.3.	Test Setting	33
6.7.4.	Test Setup	34
6.7.5.	Test Result	34
6.8.	Radiated Spurious Emission Measurement.....	35
6.8.1.	Test Limit	35
6.8.2.	Test Procedure	35
6.8.3.	Test Setting	36
6.8.4.	Test Setup	38
6.8.5.	Test Result	39
6.9.	Radiated Restricted Band Edge Measurement	40
6.9.1.	Test Limit	40
6.9.2.	Test Procedure	42
6.9.3.	Test Setting	42
6.9.4.	Test Setup	43
6.9.5.	Test Result	43
6.10.	AC Conducted Emissions Measurement.....	44
6.10.1.	Test Limit	44
6.10.2.	Test Setup	44
6.10.3.	Test Result	44

Appendix A - Test Result	45
A.1 Duty Cycle Test Result	45
A.2 26 dB Bandwidth Test Result	49
A.3 Output Power Test Result	70
A.4 Power Spectral Density Test Result	73
A.5 In-Band Emission Measurement	94
A.6 Frequency Stability Test Result	122
A.7 Contention Based Protocol Test Result	123
A.8 Radiated Spurious Emission Test Result	128
A.9 Radiated Restricted Band Edge Test Result	210
A.10 AC Conducted Emissions Test Result	282
Appendix B - Test Setup Photograph	284
Appendix C - EUT Photograph	285

1. General Information

1.1. Applicant

Hewlett Packard Enterprise Company
6280 America Center Drive, San Jose CA 95002, United States

1.2. Manufacturer

Hewlett Packard Enterprise Company
6280 America Center Drive, San Jose CA 95002, United States

1.3. Testing Facility

☒	Test Site - MRT Suzhou Laboratory	
	Laboratory Location (Suzhou - Wuzhong)	
	D8 Building, No.2 Tian'edang Rd., Wuzhong Economic Development Zone, Suzhou, China	
	Laboratory Location (Suzhou - SIP)	
	4b Building, Liando U Valley, No.200 Xingpu Rd., Shengpu Town, Suzhou Industrial Park, China	
	Laboratory Location (Suzhou - Wujiang)	
	Building 1, No.1 Xingdong Road, Wujiang, Suzhou, Jiangsu, People's Republic of China	
☐	Laboratory Accreditations	
	A2LA: 3628.01	CNAS: L10551
	FCC: CN1166	ISED: CN0001
	Test Site - MRT Shenzhen Laboratory	
	Laboratory Location (Shenzhen)	
☐	1G, Building A, Junxiangda Building, Zhongshanyuan Road West, Nanshan District, Shenzhen, China	
	Laboratory Accreditations	
	A2LA: 3628.02	CNAS: L10551
	FCC: CN1284	ISED: CN0105
	Test Site - MRT Taiwan Laboratory	
☐	Laboratory Location (Taiwan)	
	No. 38, Fuxing 2nd Rd., Guishan Dist., Taoyuan City 333, Taiwan (R.O.C.)	
	Laboratory Accreditations	
	TAF: 3261	
	FCC: 291082, TW3261	ISED: TW3261

1.4. Product Information

Product Name	ACCESS POINT
Model No.	APIN0755
Serial No.	Radiated Sample: CNRRM59015
	Conducted Sample: CNRRM5901H
Software Version	v0.4.3t4
Wi-Fi Specification	802.11a/b/g/n/ac/ax/be
Bluetooth Specification	BLE only
ZigBee Specification	802.15.4
GNSS Specification	GPS, Galileo
Antenna Information	Refer to Section 1.9
Power Type	AC Adapter Input or PoE Input
Operating Environment	Indoor Use
Note: The information of the EUT (Equipment Under Test) was provided by the manufacturer. The accuracy, completeness, and validity of the information are solely the responsibility of the manufacturer.	

1.5. Radio Specification under Test

Frequency Range	UNII-5: 5925 ~ 6425 MHz UNII-6: 6425 ~ 6525 MHz UNII-7: 6525 ~ 6875 MHz UNII-8: 6875 ~ 7125 MHz	
Type of Modulation	802.11ax/be: OFDMA	
Data Rate	802.11ax: up to 2402 Mbps 802.11be: up to 5764 Mbps	
Channel Puncturing Function	☐ Supported	☒ Unsupported
Support RU	☒ Full RU	☐ Partial RU

1.6. Working Frequencies

802.11ax-HE20/be-EHT20

Channel	Frequency	Channel	Frequency	Channel	Frequency
1	5955 MHz	5	5975 MHz	9	5995 MHz
13	6015 MHz	17	6035 MHz	21	6055 MHz
25	6075 MHz	29	6095 MHz	33	6115 MHz
37	6135 MHz	41	6155 MHz	45	6175 MHz
49	6195 MHz	53	6215 MHz	57	6235 MHz
61	6255 MHz	65	6275 MHz	69	6295 MHz
73	6315 MHz	77	6335 MHz	81	6355 MHz
85	6375 MHz	89	6395 MHz	93	6415 MHz
97	6435 MHz	101	6455 MHz	105	6475 MHz
109	6495 MHz	113	6515 MHz	117	6535 MHz
121	6555 MHz	125	6575 MHz	129	6595 MHz
133	6615 MHz	137	6635 MHz	141	6655 MHz
145	6675 MHz	149	6695 MHz	153	6715 MHz
157	6735 MHz	161	6755 MHz	165	6775 MHz
169	6795 MHz	173	6815 MHz	177	6835 MHz
181	6855 MHz	185	6875 MHz	189	6895 MHz
193	6915 MHz	197	6935 MHz	201	6955 MHz
205	6975 MHz	209	6995 MHz	213	7015 MHz
217	7035 MHz	221	7055 MHz	225	7075 MHz
229	7095 MHz	--	--	--	--

802.11ax-HE40/be-EHT40

Channel	Frequency	Channel	Frequency	Channel	Frequency
3	5965 MHz	11	6005 MHz	19	6045 MHz
27	6085 MHz	35	6125 MHz	43	6165 MHz
51	6205 MHz	59	6245 MHz	67	6285 MHz
75	6325 MHz	83	6365 MHz	91	6405 MHz
99	6445 MHz	107	6485 MHz	115	6525 MHz
123	6565 MHz	131	6605 MHz	139	6645 MHz
147	6685 MHz	155	6725 MHz	163	6765 MHz
171	6805 MHz	179	6845 MHz	187	6885 MHz
195	6925 MHz	203	6965 MHz	211	7005 MHz
219	7045 MHz	227	7085 MHz	--	--

802.11ax-HE80/be-EHT80

Channel	Frequency	Channel	Frequency	Channel	Frequency
7	5985 MHz	23	6065 MHz	39	6145 MHz
55	6225 MHz	71	6305 MHz	87	6385 MHz
103	6465 MHz	119	6545 MHz	135	6625 MHz
151	6705 MHz	167	6785 MHz	183	6865 MHz
199	6945 MHz	215	7025 MHz	--	--


802.11ax-HE160/be-EHT160

Channel	Frequency	Channel	Frequency	Channel	Frequency
15	6025 MHz	47	6185 MHz	79	6345 MHz
111	6505 MHz	143	6665 MHz	175	6825 MHz
207	6985 MHz	--	--	--	--

802.11be-EHT320

Channel	Frequency	Channel	Frequency	Channel	Frequency
31	6105 MHz	63	6265 MHz	95	6425 MHz
127	6585 MHz	159	6745 MHz	191	6905 MHz

1.7. Description of Antenna RF Port

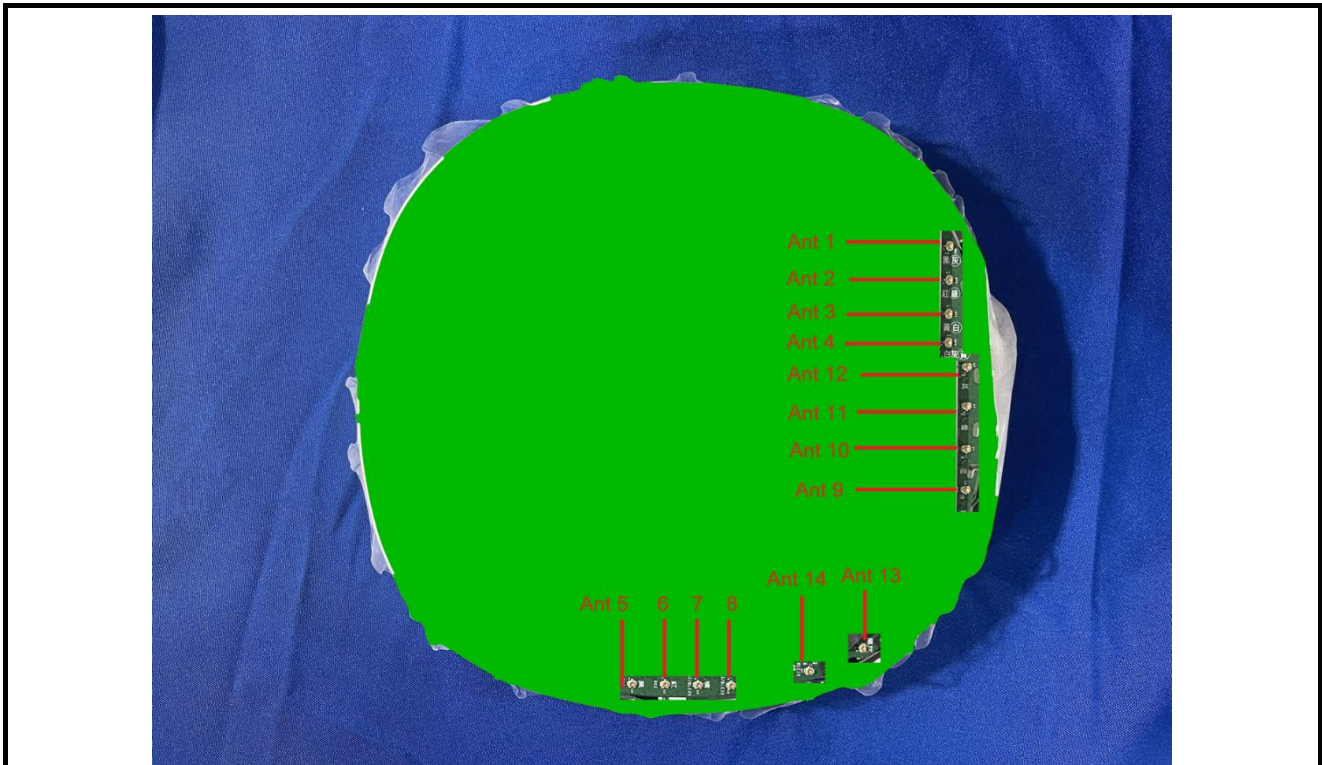

Antenna Port	RF Spec.			
	Wi-Fi 2.4G	Wi-Fi 5G	Wi-Fi 6G	BLE/ZigBee
Ant 1	--	● (Radio 0)	● (Radio 0)	--
Ant 2	--	● (Radio 0)	● (Radio 0)	--
Ant 3	--	● (Radio 0)	● (Radio 0)	--
Ant 4	--	● (Radio 0)	● (Radio 0)	--
Ant 5	--	--	● (Radio 2)	--
Ant 6	--	--	● (Radio 2)	--
Ant 7	--	--	● (Radio 2)	● (Core 0)
Ant 8	--	--	● (Radio 2)	● (Core 1)
Ant 9	● (Radio 1)	● (Radio 1)	--	--
Ant 10	● (Radio 1)	● (Radio 1)	--	--
Ant 11	● (Radio 1)	● (Radio 1)	--	--
Ant 12	● (Radio 1)	● (Radio 1)	--	--
Ant 13	GNSS			
Ant 14	--	--	--	● (Core 1)

1.8. Description of Operating Paths

Filter	Radio	Specification
Filter 1#	2	WB: Band Pass Filter (6265-7095 MHz)
Filter 2#	2	NB: Band Pass Filter (5955-6265 MHz)
Filter 3#	2	HB: Band Pass Filter (6535-7095 MHz)
Filter 4#	0	LB: Band Pass Filter (5955-6415 MHz)

Note: Full Band = WB + NB, based on channel selection.

1.9. Antenna Details

Antenna Type	Wi-Fi Antenna	Frequency Band (MHz)	Tx Paths	Directional Gain (dBi)	
				Uncorrelated	Correlated
PIFA	Ant 1	5.925 ~ 7.125	4	3.2	9.2
PIFA	Ant 2	5.925 ~ 7.125			
Alford Loop	Ant 3	5.925 ~ 7.125			
Alford Loop	Ant 4	5.925 ~ 7.125			
Alford Loop	Ant 5	5.925 ~ 7.125	4	3.6	9.4
Alford Loop	Ant 6	5.925 ~ 7.125			
PIFA	Ant 7	5.925 ~ 7.125			
PIFA	Ant 8	5.925 ~ 7.125			

Notes:

- 1, The EUT supports Cyclic Delay Diversity (CDD) mode, and CDD signals are correlated.
- 2, The EUT also supports Beam Forming mode, and the Beam Forming support 802.11ax/be.
- 3, For beamforming operation, Aruba OS automatically backs power down based on CDD power.
- 4, The detail calculation method of directional gain refers to antenna specification provided by the applicant.

2. Test Configuration


2.1. Test Mode

Group 3

Mode 1: Transmit by 802.11ax-HE20_Nss=4 (MCS0)
Mode 2: Transmit by 802.11ax-HE40_Nss=4 (MCS0)
Mode 3: Transmit by 802.11ax-HE80_Nss=4 (MCS0)
Mode 4: Transmit by 802.11ax-HE160_Nss=4 (MCS0)
Mode 5: Transmit by 802.11be-EHT20_Nss=4 (MCS0)
Mode 6: Transmit by 802.11be-EHT40_Nss=4 (MCS0)
Mode 7: Transmit by 802.11be-EHT80_Nss=4 (MCS0)
Mode 8: Transmit by 802.11be-EHT160_Nss=4 (MCS0)
Mode 9: Transmit by 802.11be-EHT320_Nss=4 (MCS0)
Notes: <ol style="list-style-type: none">1. All modes of operation and data rates were investigated, so all RF test requirements shall be executed at the worst data rate.2. For CDD mode, this device supports 4 Nss and power level is the same of spatial multiplexing. The worst case is Nss=4.3. For beamforming operation, manufacturer automatically backs power down based on CDD power. Therefore, only the CDD mode was evaluated in this report.

2.2. Test System Connection Diagram

The device was tested per the guidance ANSI C63.10-2020 was used to reference the appropriate EUT setup for radiated emissions testing and AC line conducted testing.

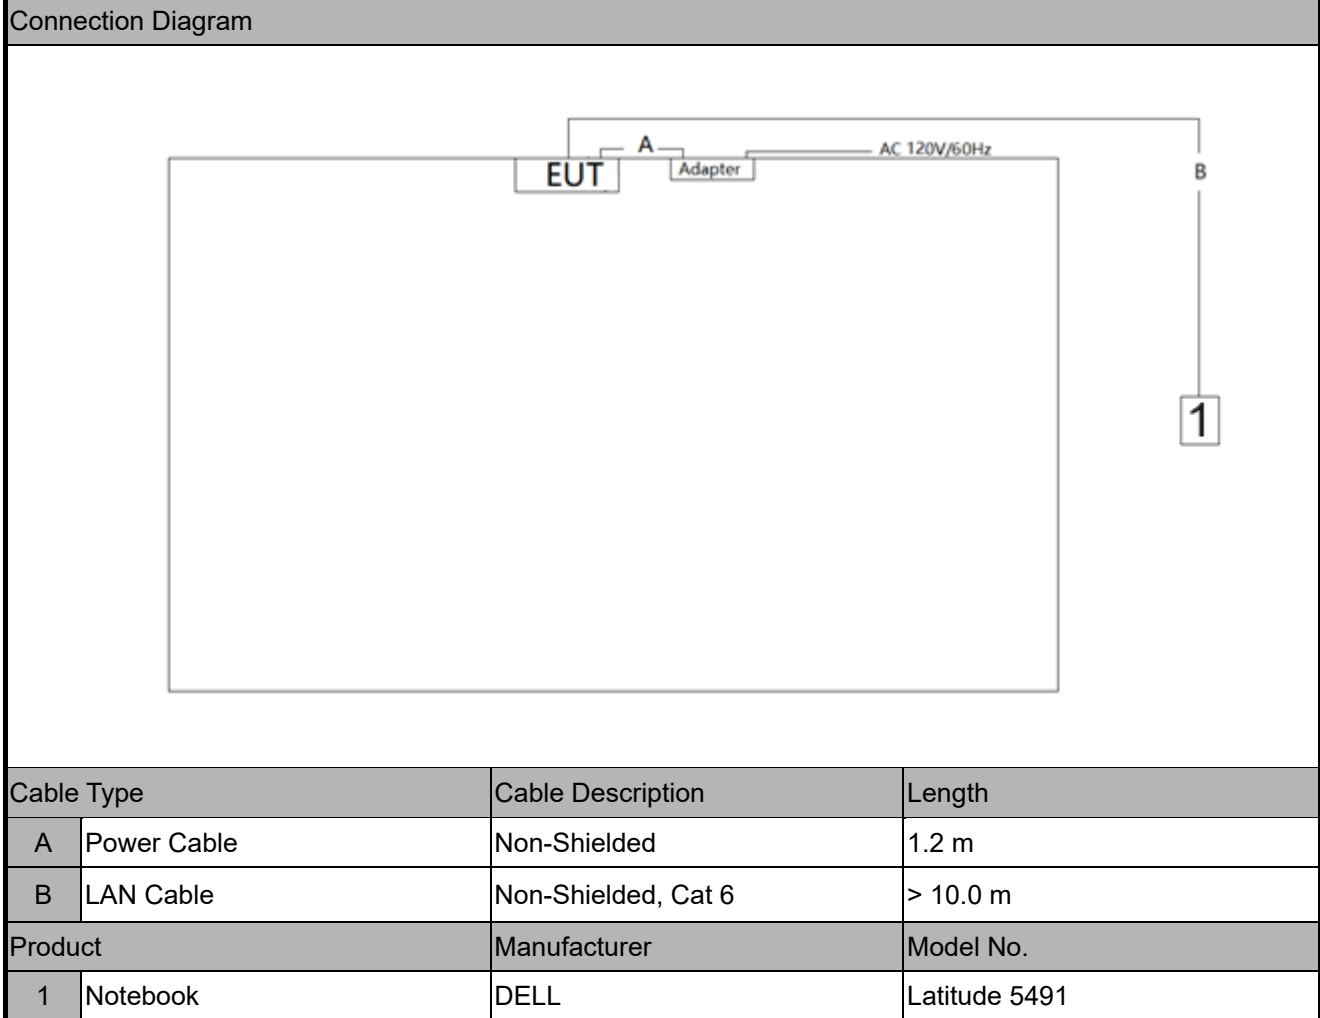

2.3. Test Software

The test utility software used during testing was “accessMTool”, and the version was 3.3.0.6.

Note: Final power setting please refer to operational description.

2.4. Applied Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ANSI C63.10-2020
- ANSI C63.10-2020/Cor1-2023
- ANSI C63.10a-2024
- FCC KDB 789033 D02 v02r01

- FCC KDB 987594 D02 v03
- FCC KDB 987594 D04 v03
- FCC KDB 662911 D01 v02r01
- FCC KDB 414788 D01 v01r01
- FCC KDB 412172 D01 v01r01

2.5. Test Environment Condition

Ambient Temperature	15 ~ 35 °C
Relative Humidity	20 ~ 75%RH

3. Antenna Requirements

Excerpt from §15.407(a)(9) of the FCC Rules/Regulations:

Access points operating under the provisions of paragraphs (a)(5) and (a)(6) of this section must employ a permanently attached integrated antenna.

- The antenna of the device is built in and locked inside the enclosure.

Conclusion:

The device complies with the requirement of §15.407(a)(9).

4. Measuring Instrument

Instrument	Manufacturer	Model No.	Asset No.	Cali. Interval	Cali. Due Date	Test Site
Preamplifier	EMCI	EMC051845SE	MRTSUE06601	1 year	2024-11-02	SIP-AC2
Preamplifier	EMCI	EMC051845SE	MRTSUE06601	1 year	2025-11-01	SIP-AC2
Preamplifier	EMCI	EMC051845SE	MRTSUE06601	1 year	2026-10-30	SIP-AC2
Thermohygrometer	testo	608-H1	MRTSUE06622	1 year	2024-11-03	SIP-AC2
Thermohygrometer	testo	608-H1	MRTSUE06622	1 year	2025-10-29	SIP-AC2
Thermohygrometer	testo	608-H1	MRTSUE06622	1 year	2026-10-08	SIP-AC2
Anechoic Chamber	RIKEN	SIP-AC2	MRTSUE06781	1 year	2024-12-21	SIP-AC2
Anechoic Chamber	RIKEN	SIP-AC2	MRTSUE06781	1 year	2025-12-19	SIP-AC2
Horn Antenna	Schwarzbeck	BBHA 9120D	MRTSUE06648	1 year	2024-10-21	SIP-AC2
Horn Antenna	Schwarzbeck	BBHA 9120D	MRTSUE06648	1 year	2025-10-20	SIP-AC2
Horn Antenna	Schwarzbeck	BBHA 9120D	MRTSUE06648	1 year	2026-10-17	SIP-AC2
Signal Analyzer	Keysight	N9020B	MRTSUE06604	1 year	2025-02-03	SIP-AC2
Signal Analyzer	Keysight	N9020B	MRTSUE06604	1 year	2026-01-21	SIP-AC2
Preamplifier	Schwarzbeck	BBV 9721	MRTSUE06121	1 year	2024-06-07	SIP-AC3
Preamplifier	Schwarzbeck	BBV 9721	MRTSUE06121	1 year	2025-06-06	SIP-AC3
Preamplifier	Schwarzbeck	BBV 9721	MRTSUE06121	1 year	2026-01-21	SIP-AC3
Horn Antenna	R&S	HF907	MRTSUE06611	1 year	2024-07-14	SIP-AC3
Horn Antenna	R&S	HF907	MRTSUE06611	1 year	2025-07-07	SIP-AC3
Horn Antenna	R&S	HF907	MRTSUE06611	1 year	2026-06-20	SIP-AC3
Thermohygrometer	testo	608-H1	MRTSUE06619	1 year	2024-10-28	SIP-AC3
Thermohygrometer	testo	608-H1	MRTSUE06619	1 year	2025-10-16	SIP-AC3
Thermohygrometer	testo	608-H1	MRTSUE06619	1 year	2026-10-16	SIP-AC3
Preamplifier	EMCI	EMC012645SE	MRTSUE06642	1 year	2025-01-11	SIP-AC3
Preamplifier	EMCI	EMC012645SE	MRTSUE06642	1 year	2026-01-05	SIP-AC3
Anechoic Chamber	RIKEN	SIP-AC3	MRTSUE06782	1 year	2024-12-21	SIP-AC3
Anechoic Chamber	RIKEN	SIP-AC3	MRTSUE06782	1 year	2025-12-19	SIP-AC3
Horn Antenna	Schwarzbeck	BBHA 9120D	MRTSUE06023	1 year	2024-08-09	WZ-AC1
Horn Antenna	Schwarzbeck	BBHA 9120D	MRTSUE06023	1 year	2025-07-26	WZ-AC1
Horn Antenna	Schwarzbeck	BBHA 9120D	MRTSUE06023	1 year	2026-07-19	WZ-AC1
Preamplifier	Agilent	83017A	MRTSUE06076	1 year	2024-11-09	WZ-AC1
Preamplifier	Agilent	83017A	MRTSUE06076	1 year	2025-11-08	WZ-AC1
Preamplifier	Agilent	83017A	MRTSUE06076	1 year	2026-11-06	WZ-AC1
Anechoic Chamber	TDK	WZ-AC1	MRTSUE06212	1 year	2024-04-20	WZ-AC1
Anechoic Chamber	TDK	WZ-AC1	MRTSUE06212	1 year	2025-04-19	WZ-AC1

Instrument	Manufacturer	Model No.	Asset No.	Cali. Interval	Cali. Due Date	Test Site
Anechoic Chamber	TDK	WZ-AC1	MRTSUE06212	1 year	2026-04-17	WZ-AC1
Thermohygrometer	testo	608-H1	MRTSUE11039	1 year	2024-10-25	WZ-AC1
Thermohygrometer	testo	608-H1	MRTSUE11039	1 year	2025-10-16	WZ-AC1
Thermohygrometer	testo	608-H1	MRTSUE11039	1 year	2026-10-08	WZ-AC1
Horn Antenna	Schwarzbeck	BBHA 9170	MRTSUE06597	1 year	2024-11-04	WZ-AC1
Horn Antenna	Schwarzbeck	BBHA 9170	MRTSUE06597	1 year	2025-11-03	WZ-AC1
Horn Antenna	Schwarzbeck	BBHA 9170	MRTSUE06597	1 year	2026-11-02	WZ-AC1
Preamplifier	EMCI	EMC184045SE	MRTSUE06640	1 year	2025-01-11	WZ-AC1
Preamplifier	EMCI	EMC184045SE	MRTSUE06640	1 year	2026-01-09	WZ-AC1
Active Loop Antenna	Schwarzbeck	FMZB 1519-60 D	MRTSUE07076	1 year	2024-12-04	WZ-AC1
Active Loop Antenna	Schwarzbeck	FMZB 1519-60 D	MRTSUE07076	1 year	2025-11-19	WZ-AC1
Active Loop Antenna	Schwarzbeck	FMZB 1519-60 D	MRTSUE07076	1 year	2026-11-18	WZ-AC1
TRILOG Antenna	Schwarzbeck	VULB 9168	MRTSUE06172	1 year	2024-06-09	WZ-AC1
TRILOG Antenna	Schwarzbeck	VULB 9168	MRTSUE06172	1 year	2025-05-15	WZ-AC1
TRILOG Antenna	Schwarzbeck	VULB 9168	MRTSUE06172	1 year	2026-05-11	WZ-AC1
Horn Antenna	Schwarzbeck	BBHA 9120D	MRTSUE06171	1 year	2024-10-11	WZ-AC2
Horn Antenna	Schwarzbeck	BBHA 9120D	MRTSUE06171	1 year	2025-09-23	WZ-AC2
Horn Antenna	Schwarzbeck	BBHA 9120D	MRTSUE06171	1 year	2026-09-12	WZ-AC2
Preamplifier	Schwarzbeck	BBV 9718	MRTSUE06176	1 year	2024-05-07	WZ-AC2
Preamplifier	Schwarzbeck	BBV 9718	MRTSUE06176	1 year	2025-05-06	WZ-AC2
Preamplifier	Schwarzbeck	BBV 9718	MRTSUE06176	1 year	2026-03-18	WZ-AC2
Anechoic Chamber	RIKEN	WZ-AC2	MRTSUE06213	1 year	2024-04-20	WZ-AC2
Anechoic Chamber	RIKEN	WZ-AC2	MRTSUE06213	1 year	2025-04-18	WZ-AC2
Anechoic Chamber	RIKEN	WZ-AC2	MRTSUE06213	1 year	2026-04-17	WZ-AC2
Thermohygrometer	testo	608-H1	MRTSUE11263	1 year	2024-11-07	WZ-AC2
Thermohygrometer	testo	608-H1	MRTSUE11263	1 year	2025-11-02	WZ-AC2
Thermohygrometer	testo	608-H1	MRTSUE11263	1 year	2026-10-08	WZ-AC2
Signal Analyzer	Keysight	N9010B	MRTSUE06607	1 year	2024-10-23	WZ-AC2
Signal Analyzer	Keysight	N9010B	MRTSUE06607	1 year	2025-10-13	WZ-AC2
Signal Analyzer	Keysight	N9010B	MRTSUE06607	1 year	2026-09-28	WZ-AC2
Preamplifier	EMCI	EMC184045SE	MRTSUE06640	1 year	2025-01-11	WZ-AC2
Preamplifier	EMCI	EMC184045SE	MRTSUE06640	1 year	2026-01-09	WZ-AC2
Horn Antenna	Schwarzbeck	BBHA 9170	MRTSUE06024	1 year	2024-10-11	WZ-AC2
Horn Antenna	Schwarzbeck	BBHA 9170	MRTSUE06024	1 year	2025-09-23	WZ-AC2
Horn Antenna	Schwarzbeck	BBHA 9170	MRTSUE06024	1 year	2026-09-12	WZ-AC2

Instrument	Manufacturer	Model No.	Asset No.	Cali. Interval	Cali. Due Date	Test Site
Signal Analyzer	Keysight	N9010B	MRTSUE06607	1 year	2024-10-23	WZ-AC2
Signal Analyzer	Keysight	N9010B	MRTSUE06607	1 year	2025-10-13	WZ-AC2
Signal Analyzer	Keysight	N9010B	MRTSUE06607	1 year	2026-09-28	WZ-AC2
Thermohygrometer	testo	608-H1	MRTSUE06402	1 year	2024-05-31	WZ-SR5
Thermohygrometer	testo	608-H1	MRTSUE06402	1 year	2025-05-12	WZ-SR5
Thermohygrometer	testo	608-H1	MRTSUE06402	1 year	2026-04-24	WZ-SR5
Shielding Room	HUAMING	WZ-SR5	MRTSUE06442	N/A	N/A	WZ-SR5
Signal Analyzer	Keysight	N9010B	MRTSUE06457	1 year	2024-05-23	WZ-SR5
Signal Analyzer	Keysight	N9010B	MRTSUE06457	1 year	2025-05-08	WZ-SR5
Signal Analyzer	Keysight	N9010B	MRTSUE06457	1 year	2026-04-26	WZ-SR5
Frequency extender for EXG or MXG	Keysight	N5182BX07	MRTSUE06984	1 year	2025-02-03	WZ-SR5
Frequency extender for EXG or MXG	Keysight	N5182BX07	MRTSUE06984	1 year	2026-01-21	WZ-SR5
Signal Generator	Keysight	N5182B	MRTSUE06993	1 year	2024-07-31	WZ-SR5
Signal Generator	Keysight	N5182B	MRTSUE06993	1 year	2025-07-18	WZ-SR5
Signal Generator	Keysight	N5182B	MRTSUE06993	1 year	2026-07-14	WZ-SR5
Attenuator	MVE	MVE2213	MRTSUE11092	1 year	2024-06-08	WZ-SR5
Attenuator	MVE	MVE2213	MRTSUE11092	1 year	2025-06-05	WZ-SR5
Attenuator	MVE	MVE2213	MRTSUE11092	1 year	2026-06-02	WZ-SR5
Attenuator	MVE	MVE2213	MRTSUE11087	1 year	2024-06-08	WZ-SR5/WZ-TR3
Attenuator	MVE	MVE2213	MRTSUE11087	1 year	2025-06-05	WZ-SR5/WZ-TR3
Attenuator	MVE	MVE2213	MRTSUE11087	1 year	2026-06-02	WZ-SR5/WZ-TR3
Signal Analyzer	Keysight	N9010B	MRTSUE06457	1 year	2024-05-23	WZ-SR5/WZ-TR3
Signal Analyzer	Keysight	N9010B	MRTSUE06457	1 year	2025-05-08	WZ-SR5/WZ-TR3
Signal Analyzer	Keysight	N9010B	MRTSUE06457	1 year	2026-04-26	WZ-SR5/WZ-TR3
RF Cable	UCwave	UCE500	MRTSUE07380	1 year	2026-07-20	WZ-SR5/WZ-TR3
RF Cable	UCwave	UCE500	MRTSUE07381	1 year	2026-07-20	WZ-SR5/WZ-TR3
Temperature Chamber	BAOYT	BYH-150CL	MRTSUE06051	1 year	2024-09-27	WZ-TR3
Temperature Chamber	BAOYT	BYH-150CL	MRTSUE06051	1 year	2025-09-02	WZ-TR3
Temperature Chamber	BAOYT	BYH-150CL	MRTSUE06051	1 year	2026-08-31	WZ-TR3
Thermohygrometer	testo	608-H1	MRTSUE11268	1 year	2024-12-14	WZ-TR3
Thermohygrometer	testo	608-H1	MRTSUE11268	1 year	2025-12-10	WZ-TR3
Shielding Room	MIX-BEP	WZ-SR2	MRTSUE06215	5 years	2026-12-20	WZ-SR2
Thermohygrometer	testo	608-H1	MRTSUE06404	1 year	2024-05-31	WZ-SR2
Thermohygrometer	testo	608-H1	MRTSUE06404	1 year	2025-05-12	WZ-SR2

Instrument	Manufacturer	Model No.	Asset No.	Cali. Interval	Cali. Due Date	Test Site
Thermohygrometer	testo	608-H1	MRTSUE06404	1 year	2026-04-24	WZ-SR2
Two-Line V-Network	R&S	ENV216	MRTSUE06002	1 year	2024-05-23	WZ-SR2
Two-Line V-Network	R&S	ENV216	MRTSUE06002	1 year	2025-05-08	WZ-SR2
Two-Line V-Network	R&S	ENV216	MRTSUE06002	1 year	2026-04-26	WZ-SR2
EMI Test Receiver	R&S	ESR3	MRTSUE06909	1 year	2024-09-27	WZ-SR2
EMI Test Receiver	R&S	ESR3	MRTSUE06909	1 year	2025-09-05	WZ-SR2
EMI Test Receiver	R&S	ESR3	MRTSUE06909	1 year	2026-08-31	WZ-SR2
Signal Analyzer	Keysight	N9042B	MRTSUE07260	1 year	2026-11-05	WJ-SR7
Signal Generator	Keysight	N5182B	MRTSUE06993	1 year	2026-07-14	WJ-SR7
Signal Generator	Keysight	N5186A	MRTSUE07259	1 year	2026-11-06	WJ-SR7
Shielding Room	TDK	WJ-SR7	MRTSUE07129	N/A	N/A	WJ-SR7
Thermohygrometer	testo	608-H1	MRTSUE11337	1 year	2026-06-05	WJ-SR7

Software	Version	Function
EMI Software	V3.0.0	EMI Test Software
Controller_MF 7802BS	1.02	RE Antenna & Turntable
Controller_MF 7802	1.02	RE Antenna & Turntable
Controller_MF 7802	2.03C	RE Antenna & Turntable
e3	230711	RE & CE

5. Decision Rules and Measurement Uncertainty

5.1. Decision Rules

The Decision Rule is based on Simple Acceptance in accordance with ISO Guide 98-4:2012 Clause 8.2.
(Measurement uncertainty is not taken into account when stating conformity with a specified requirement.)

5.2. Measurement Uncertainty

Where relevant, the following test uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2. This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of $k = 2$.

For 2024-04-18 ~ 2024-06-26

AC Conducted Emission Measurement	
The maximum measurement uncertainty is evaluated as:	
9 kHz ~ 150 kHz:	3.58 dB
150 kHz ~ 30 MHz:	3.20 dB
Radiated Emission Measurement	
The maximum measurement uncertainty is evaluated as:	
Coaxial:	9 kHz ~ 30 MHz: 2.61 dB
Coplanar:	9 kHz ~ 30 MHz: 2.62 dB
Horizontal:	30 MHz ~ 200 MHz: 3.79 dB
	200 MHz ~ 1 GHz: 3.91 dB
	1 GHz ~ 40 GHz: 4.99 dB
Vertical:	30 MHz ~ 200 MHz: 4.06 dB
	200 MHz ~ 1 GHz: 5.21 dB
	1 GHz ~ 40 GHz: 4.90 dB
Spurious Emissions, Conducted	
Measuring Uncertainty for a Level of Confidence of 95% ($U=2U_c(y)$): 2.2 dB	
Output Power	
Measuring Uncertainty for a Level of Confidence of 95% ($U=2U_c(y)$): 1.4 dB	
Power Spectrum Density	
Measuring Uncertainty for a Level of Confidence of 95% ($U=2U_c(y)$): 2.2 dB	
Occupied Bandwidth	
Measuring Uncertainty for a Level of Confidence of 95% ($U=2U_c(y)$): 2.7%	

For 2025-11-17 ~ 2025-12-05

AC Conducted Emission Measurement
<p>The maximum measurement uncertainty is evaluated as:</p> <p>9 kHz ~ 150 kHz: 3.58 dB</p> <p>150 kHz ~ 30 MHz: 3.20 dB</p>
Radiated Emission Measurement
<p>The maximum measurement uncertainty is evaluated as:</p> <p>Coaxial: 9 kHz ~ 30 MHz: 2.35 dB</p> <p>Coplanar: 9 kHz ~ 30 MHz: 2.37 dB</p> <p>Horizontal: 30 MHz ~ 200 MHz: 3.47 dB</p> <p>200 MHz ~ 1 GHz: 4.17 dB</p> <p>1 GHz ~ 40 GHz: 4.97 dB</p> <p>Vertical: 30 MHz ~ 200 MHz: 4.07 dB</p> <p>200 MHz ~ 1 GHz: 5.28 dB</p> <p>1 GHz ~ 40 GHz: 4.84 dB</p>
Spurious Emissions, Conducted
<p>Measuring Uncertainty for a Level of Confidence of 95% ($U=2 U_c(y)$): 2.5 dB</p>
Output Power
<p>Measuring Uncertainty for a Level of Confidence of 95% ($U=2 U_c(y)$): 1.5 dB</p>
Power Spectrum Density
<p>Measuring Uncertainty for a Level of Confidence of 95% ($U=2 U_c(y)$): 2.5 dB</p>
Occupied Bandwidth
<p>Measuring Uncertainty for a Level of Confidence of 95% ($U=2 U_c(y)$): 3.2%</p>

6. Test Result

6.1. Summary

FCC Section(s)	Test Description	Test Condition	Verdict
15.407(a)(10)	26 dB Bandwidth	Conducted	Pass
15.407(a)(5)	Maximum Equivalent Isotropically Radiated Power (EIRP)	Radiated	Pass
15.407(a)(5)	Maximum Power Spectral Density (EIRP)		Pass
15.407(b)(7)	In-Band Emission		Pass
15.407(g)	Frequency Stability	Conducted	Pass
15.407(d)(6)	Contention-Based Protocol	Conducted	Pass
15.407(b)(6)	Unwanted Emissions	Radiated	Pass
15.407(b)(9), (10)	General Field Strength (Restricted Bands and Radiated Emission)		Pass
15.207	AC Conducted Emissions 150 kHz - 30 MHz	Line Conducted	Pass

Notes:

1. The analyzer plots shown in this section were captured using a correction table to account for cable and attenuator losses in the system connecting the EUT to the analyzer across relevant frequencies.
2. For radiated emission test, every axis (X, Y, Z) was also verified. The test results shown in the following sections represent the worst-case emissions.

6.2. 26 dB Bandwidth Measurement

6.2.1. Test Limit

The maximum transmitter channel bandwidth for U-NII devices in the 5.925-7.125 GHz band is 320 megahertz.

6.2.2. Test Procedure

KDB 789033 D02 v02r01- Section II)C)1) (26 dB Bandwidth)

KDB 789033 D02 v02r01- Section II)D) (99% Bandwidth)

6.2.3. Test Setting

26 dB Bandwidth


1. The analyzers' automatic bandwidth measurement capability was used to perform the 26 dB bandwidth
2. RBW = approximately 1% of the emission bandwidth.
3. VBW > RBW
4. Detector = Peak.
5. Trace mode = max hold.
6. Measure the maximum width of the emission that is 26 dB down from the maximum of the emission.
Compare this with the RBW setting of the analyzer. Readjust RBW and repeat measurement as needed until the RBW/EBW ratio is approximately 1%.

99% Bandwidth

1. Set center frequency to the nominal EUT channel center frequency.
2. RBW = 1% to 5% of the OBW
3. $VBW \geq 3 \times RBW$
4. Span = 1.5 times to 5 times the OBW
5. Detector = peak
6. Trace mode = max hold
7. Allow the trace to stabilize
8. Use the 99% power bandwidth function of the instrument.

6.2.4. Test Setup

Spectrum Analyzer



DC Block
&
Attenuator



EUT



6.2.5. Test Result

Refer to Appendix A.2.

6.3. Output Power Measurement

6.3.1. Test Limit

For an indoor access point operating in the 5.925-7.125 GHz band, the maximum EIRP over the frequency band of operation must not exceed 30 dBm.


6.3.2. Test Procedure

KDB 789033 D02 v02r01- Section II)E)3)b) Method PM-G

6.3.3. Test Setting

1. Set span to encompass the EBW (or, alternatively, the entire 99% occupied bandwidth) of the signal
2. Set RBW = 1 MHz
3. Set VBW $\geq$ 3 MHz
4. Number of points in sweep $\geq 2 \times \text{span} / \text{RBW}$
5. Sweep time = auto
6. Detector = power averaging (rms)
7. Allow the sweep to “free run”
8. Trace average at least 100 traces in power averaging (rms) mode; however, the number of traces to be averaged shall be increased above 100 as needed to ensure that the average accurately represents the true average over the on and off periods of the transmitter.
9. Use the Channel Power function of the instrument.
10. Add $10 \times \log (1/x)$, where x is the duty cycle, to the measured power in order to compute the average power during the actual transmission times

6.3.4. Test Setup

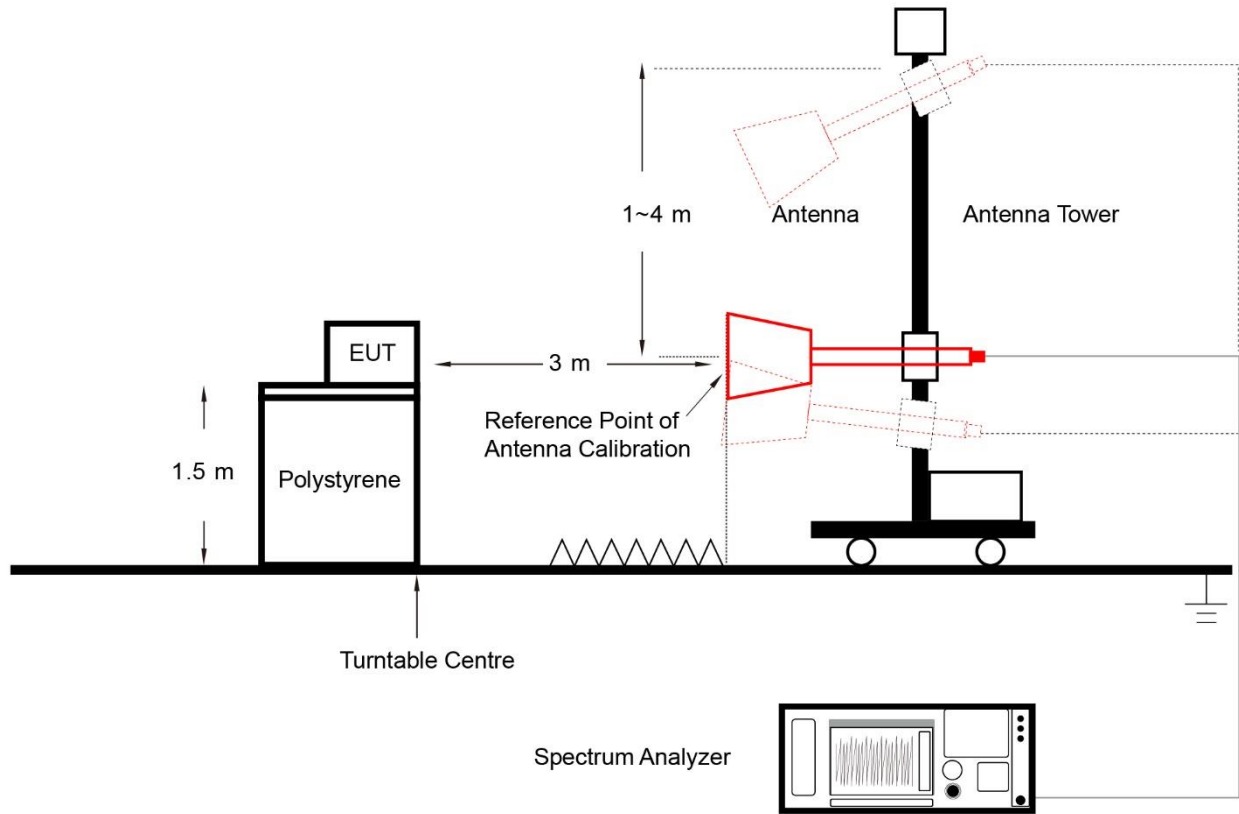

6.3.5. Test Result

Refer to Appendix A.3.

6.4. Power Spectral Density Measurement

6.4.1. Test Limit

For an indoor access point operating in the 5.925-7.125 GHz band, the maximum power spectral density must not exceed 5 dBm EIRP in any 1-megahertz band.


6.4.2. Test Procedure

KDB 789033 D02 v02r01-Section II)F)

6.4.3. Test Setting

1. Analyzer was set to the center frequency of the UNII channel under investigation
2. Span was set to encompass the entire 26 dB EBW of the signal.
3. RBW = 1 MHz
4. VBW = 3 MHz
5. Number of sweep points $\geq 2 \times (\text{span} / \text{RBW})$
6. Detector = power averaging (Average)
7. Sweep time = auto
8. Trigger = free run
9. Trace average at least 100 traces in power averaging (rms) mode; however, the number of traces to be averaged shall be increased above 100 as needed to ensure that the average accurately represents the true average over the on and off periods of the transmitter.
10. Use the peak search function on the instrument to find the peak of the spectrum and record its value.
11. Add $10 \times \log(1/x)$, where x is the duty cycle, to the measured power in order to compute the average power during the actual transmission times (because the measurement represents an average over both the on and off times of the transmission). For example, add $10 \times \log(1/0.25) = 6$ dB if the duty cycle is 25 percent.

6.4.4. Test Setup

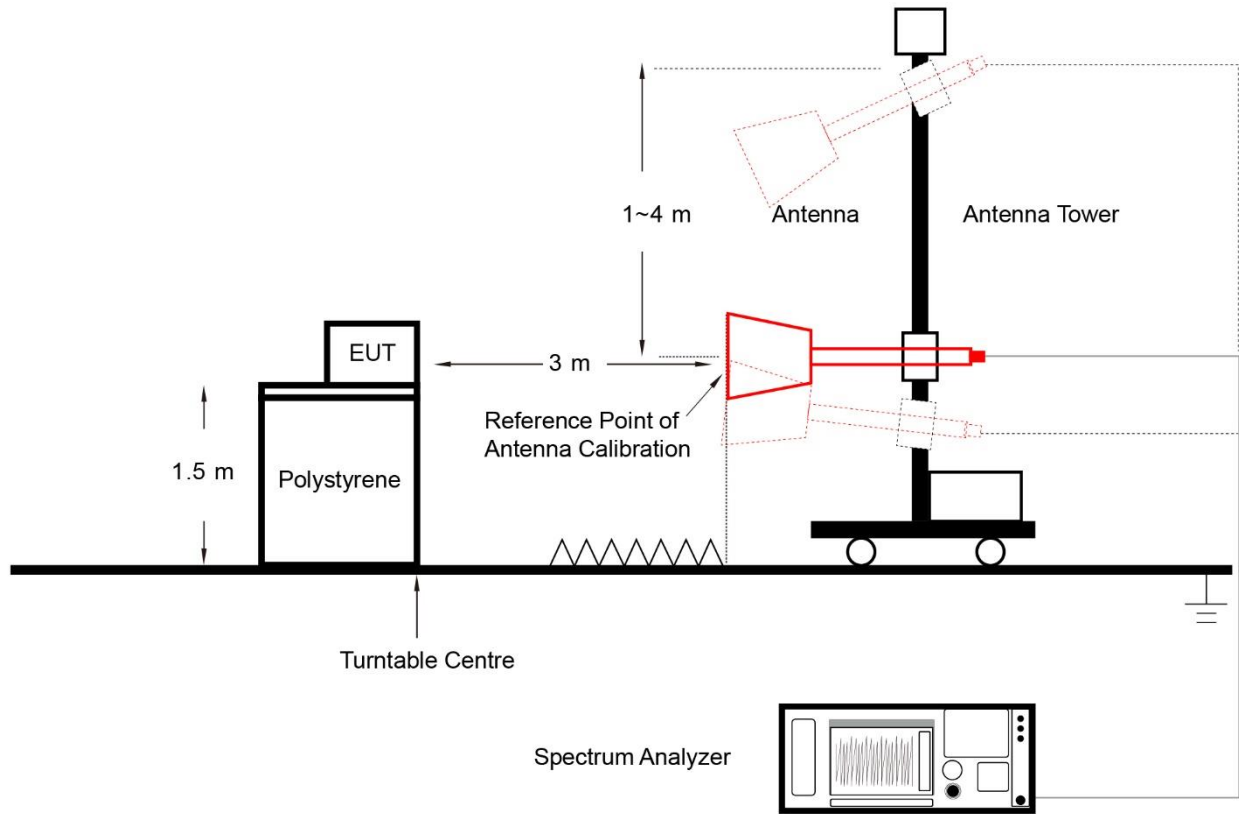

6.4.5. Test Result

Refer to Appendix A.4.

6.5. In-Band Emission Measurement

6.5.1. Test Limit

Suppressed by 20 dB at 1 MHz outside of the channel edge.

(The channel edge is defined as the 26-dB point on either side of the carrier center frequency.)

Suppressed by 28 dB at one channel bandwidth from the channel center.

Suppressed by 40 dB at one- and one-half times the channel bandwidth from the channel center.

6.5.2. Test Procedure

KDB 987594 D02 v03 - Section J

6.5.3. Test Setting


Emissions Mask Reference Level Measurement

1. Set the span to encompass the entire 26 dB EBW of the signal.
2. Set RBW = same RBW used for 26 dB EBW measurement.
3. Set VBW $\geq 3 \times$ RBW.
4. Number of points in sweep $\geq [2 \times \text{span} / \text{RBW}]$.
5. Sweep time = auto.
6. Detector = RMS.
7. Trace average at least 100 traces in power averaging (rms) mode.
8. Use the peak search function on the instrument to find the peak of the spectrum.

In-Band Emission

1. Using the measuring equipment limit line function, develop the emissions mask based on rule.
2. Adjust the span to encompass the entire mask as necessary.
3. Clear trace.
4. Trace average at least 100 traces in power averaging (rms) mode.
5. Adjust the reference level as necessary so that the crest of the channel touches the top of the emission mask.

6.5.4. Test Setup

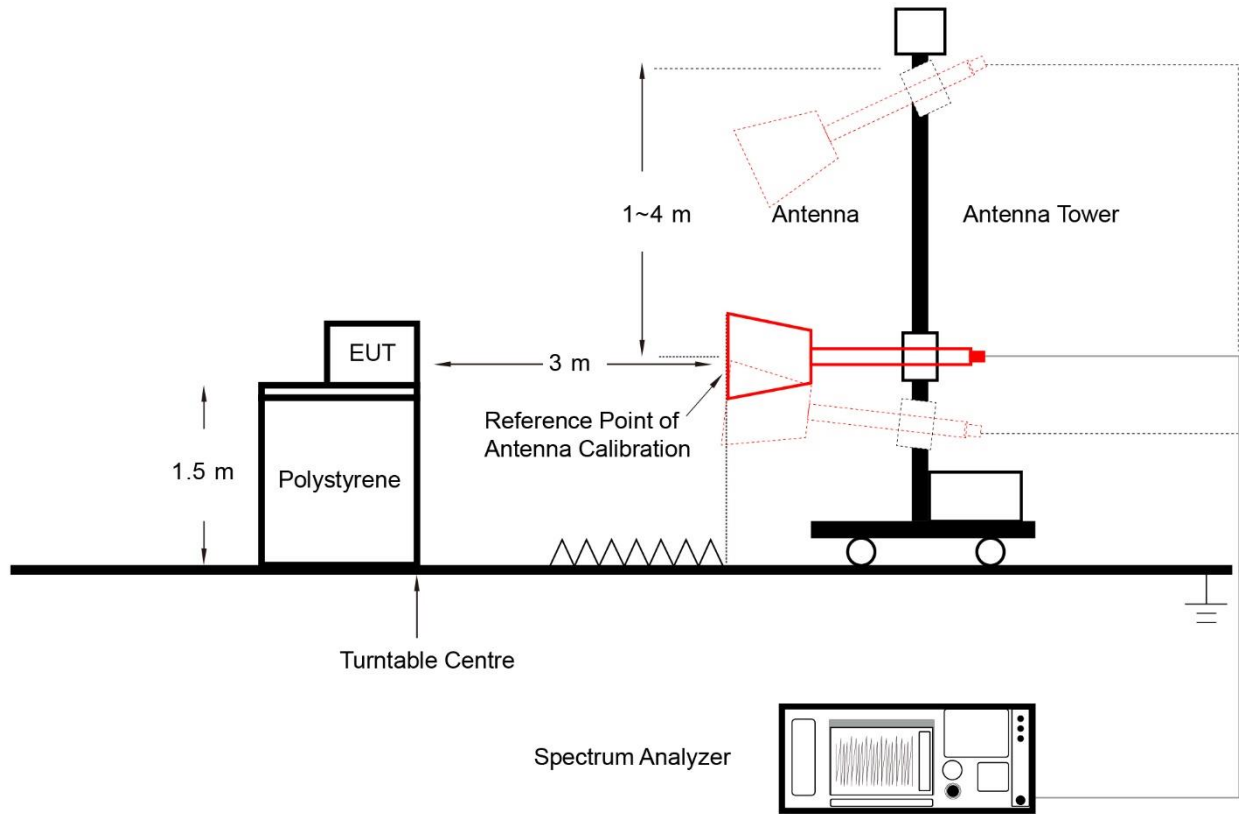

6.5.5. Test Result

Refer to Appendix A.5.

6.6. Frequency Stability Measurement

6.6.1. Test Limit

Manufactures of U-NII devices are responsible for ensuring frequency stability such that an emission is maintained within the band of operation under all conditions of normal operation as specified in the user's manual.

6.6.2. Test Procedure

Frequency Stability Under Temperature Variations:


The equipment under test was connected to an external AC or DC power supply and input rated voltage. RF output was connected to a frequency counter or spectrum analyzer via feed through attenuators. The EUT was placed inside the temperature chamber. Set the spectrum analyzer RBW low enough to obtain the desired frequency resolution and measure EUT 20 °C operating frequency as reference frequency. Turn EUT off and set the chamber temperature to highest. After the temperature stabilized for approximately 30 minutes recorded the frequency. Repeat step measure with 10 °C decreased per stage until the lowest temperature reached.

Frequency Stability Under Voltage Variations:

Set chamber temperature to 20 °C. Use a variable AC power supply / DC power source to power the EUT and set the voltage to rated voltage. Set the spectrum analyzer RBW low enough to obtain the desired frequency resolution and recorded the frequency.

Reduce the input voltage to specify extreme voltage variation ($\pm 15\%$) and endpoint, record the maximum frequency change.

6.6.3. Test Setup

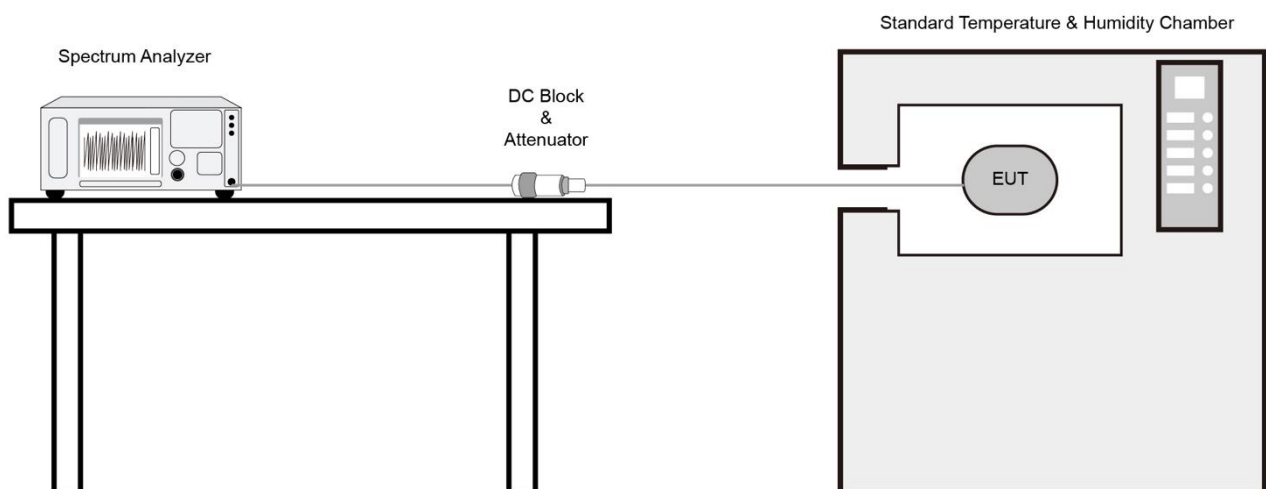

6.6.4. Test Result

Refer to Appendix A.6.

6.7. Contention Based Protocol Measurement

6.7.1. Test Limit

Unlicensed indoor low power device must detect co-channel radio frequency power that is at least -62 dBm (The threshold is referenced to a 0 dBi antenna gain.) or low.

Indoor low power device must detect an AWGN signal with 90% (or better) level of certainty.

6.7.2. Test Procedure


KDB 987594 D02 v03- Section I

6.7.3. Test Setting

1. Configure the EUT to transmit with a constant duty cycle.
2. Set the operating parameters of the EUT including power level, operating frequency, modulation and bandwidth.
3. Set the signal analyzer center frequency to the nominal EUT channel center frequency. The span range of the signal analyzer shall be between two times and five times the OBW of the EUT.
Connect the output port of the EUT to the signal analyzer 2. Ensure that the attenuator 2 provides enough attenuation to not overload the signal analyzer 2 receiver.
4. Monitoring the signal analyzer 2, verify the EUT is operating and transmitting with the parameters set at step two.
5. Using an AWGN signal source, generate a 10 MHz-wide AWGN signal. Use Table 1 of KDB 987594 to determine the center frequency of the 10 MHz AWGN signal relative to the EUT's channel bandwidth and center frequency.
6. Set the AWGN signal power to an extremely low level. Connect the AWGN signal source, via a 3-dB splitter, to the signal analyzer 1 and the EUT as shown in below figure.
7. Transmit the AWGN signal (RF ON) and verify its characteristics on the signal analyzer 1.
8. Monitor the signal analyzer 2 to verify if the AWGN signal has been detected and the EUT has ceased transmission. If the EUT continues to transmit, then incrementally increase the AWGN signal power level until the EUT stops transmitting.
9. Determine and record the AWGN signal power level (at the EUT's antenna port) at which the EUT ceased transmission. Repeat the procedure at least 10 times to verify the EUT can detect an AWGN signal with 90% (or better) level of certainty.
10. Refer to Table 1 to determine number of times the detection threshold testing needs to be repeated. If testing is required more than once, then go back to step 5, choose a different center frequency for the AWGN

signal and repeat the process.

6.7.4. Test Setup

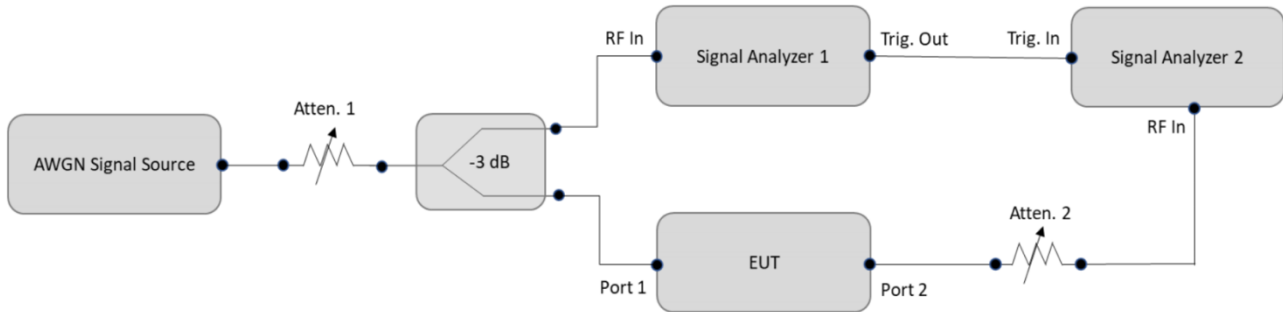

6.7.5. Test Result

Refer to Appendix A.7.

6.8. Radiated Spurious Emission Measurement

6.8.1. Test Limit

For 15.407(b)(5) requirement

For transmitters operating within the 5.925-7.125 GHz band: Any emissions outside of the 5.925-7.125 GHz band must not exceed an EIRP of -27 dBm/MHz.

Refer to 987594 D02 U-NII 6 GHz EMC Measurement v03 clause G

Use guidance in KDB 789033 for measurements below 1000 MHz and above 1000 MHz. Unwanted emissions outside of restricted bands are measured with a RMS detector. In addition, 15.35(b) applies where the peak emissions must be limited to no more than 20 dB above the average limit.

All out of band emissions appearing in a restricted band as specified in Section 15.205 of the Title 47 CFR must not exceed the limits shown in Table per Section 15.209.

FCC Part 15 Subpart C Paragraph 15.209		
Frequency [MHz]	Field Strength [μ V/m]	Measured Distance [Meters]
0.009 - 0.490	2400/F (kHz)	300
0.490 - 1.705	24000/F (kHz)	30
1.705 - 30	30	30
30 - 88	100	3
88 - 216	150	3
216 - 960	200	3
Above 960	500	3

6.8.2. Test Procedure

KDB 789033 D02 v02r01-Section II)G)

6.8.3. Test Setting**Table 1 - RBW as a function of frequency**

Frequency	RBW
9 ~ 150 kHz	200 ~ 300 Hz
0.15 ~ 30 MHz	9 ~ 10 kHz
30 ~ 1000 MHz	100 ~ 120 kHz
> 1000 MHz	1 MHz

Quasi-Peak Measurements below 1 GHz

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. Span was set greater than 1 MHz
3. RBW = as specified in Table 1
4. Detector = CISPR quasi-peak
5. Sweep time = auto couple
6. Trace was allowed to stabilize

Peak Measurements above 1 GHz

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 1 MHz
3. VBW = 3 MHz
4. Detector = peak
5. Sweep time = auto couple
6. Trace mode = max hold
7. Trace was allowed to stabilize

Average Measurements above 1 GHz (Method VB)


1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 1 MHz
3. VBW; If the EUT is configured to transmit with duty cycle $\geq 98\%$, set VBW = 10 Hz.

If the EUT duty cycle is $< 98\%$, set VBW $\geq 1/T$. T is the minimum transmission duration.


4. As an alternative, the instrument may be set to linear detector mode. Ensure that video filtering is applied in linear voltage domain (rather than in a log or dB domain). Some instruments require linear display mode in order to accomplish this. Others have a setting for Average-VBW Type, which can be set to "Voltage" regardless of the display mode
5. Detector = Peak
6. Sweep time = auto
7. Trace mode = max hold
8. Allow max hold to run for at least 50 times (1/duty cycle) traces

6.8.4. Test Setup


Below 30 MHz Test Setup:

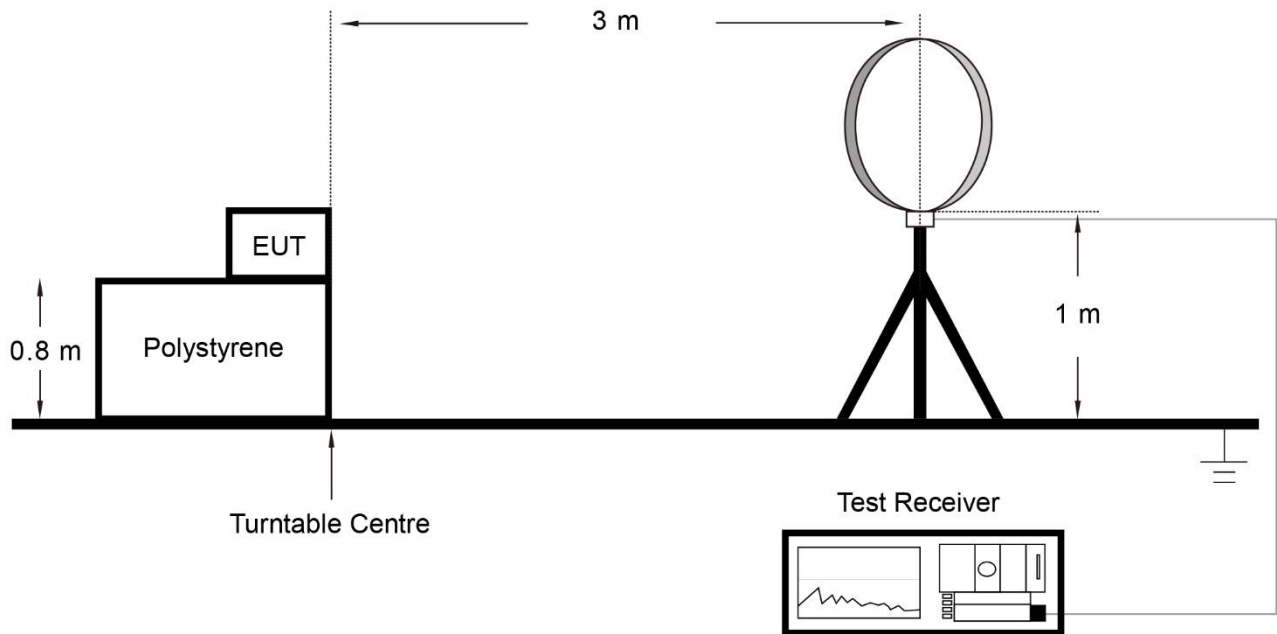

Below 1 GHz Test Setup:

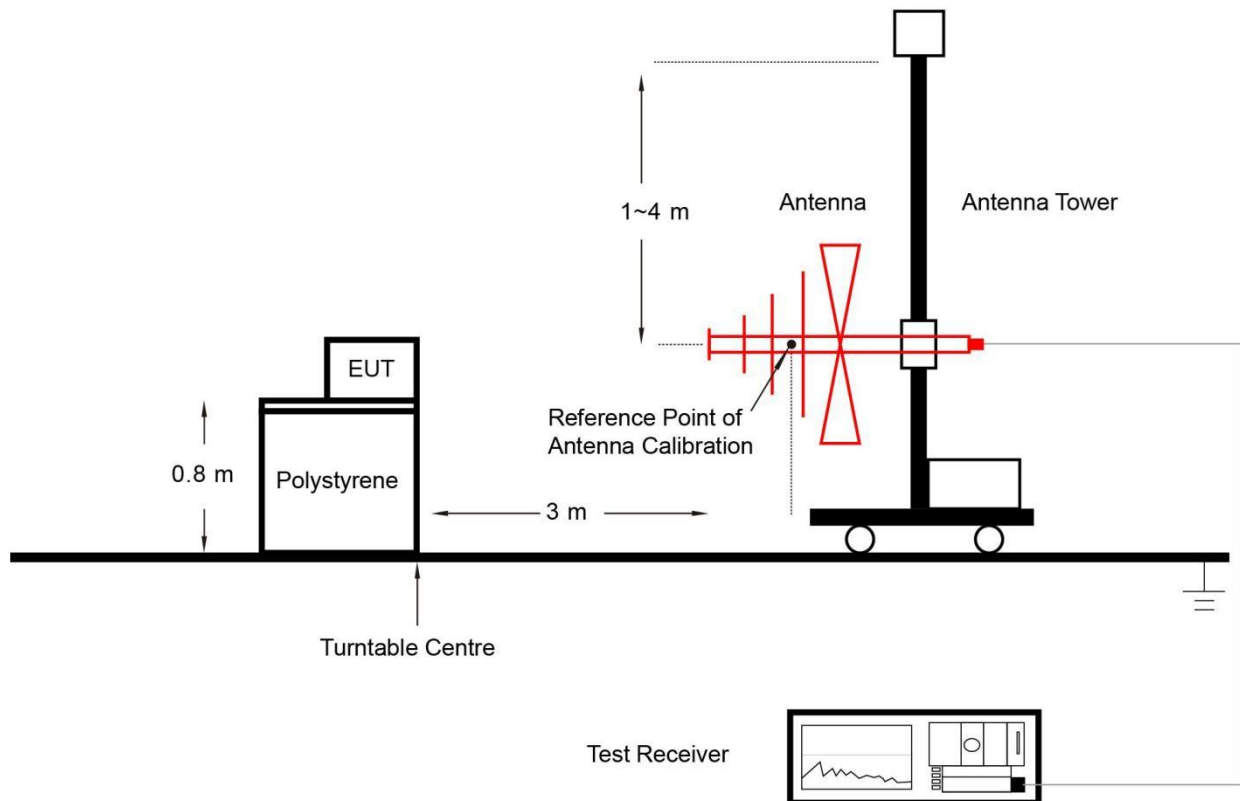

Above 1 GHz Test Setup:

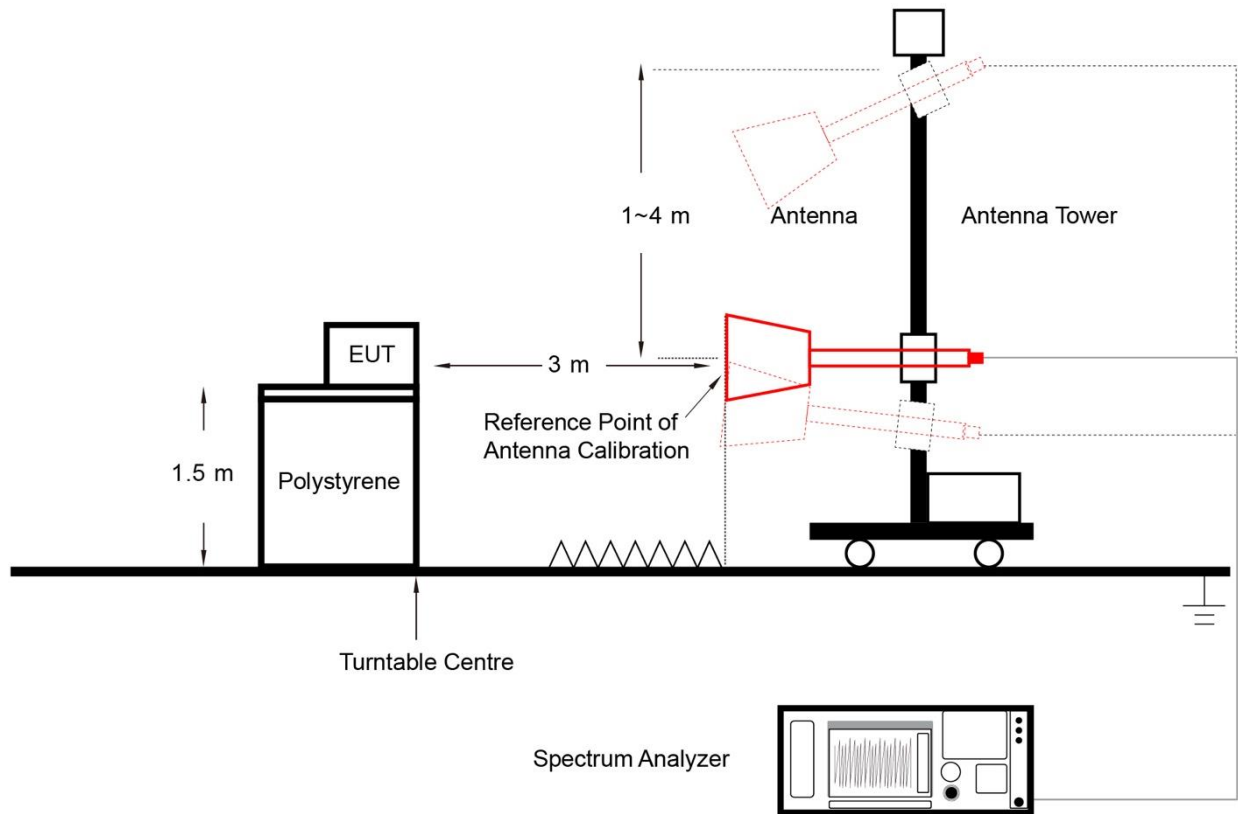

6.8.5. Test Result

Refer to Appendix A.8.

6.9. Radiated Restricted Band Edge Measurement

6.9.1. Test Limit

For 15.205 requirement:

Radiated emissions which fall in the restricted bands, as defined in Section 15.205(a) of FCC part 15, must also comply with the radiated emission limits specified in Section 15.209(a).

Frequency (MHz)	Frequency (MHz)	Frequency (MHz)	Frequency (GHz)
0.090 - 0.110	16.42 - 16.423	399.9 - 410	4.5 - 5.15
¹ 0.495 - 0.505	16.69475 - 16.69525	608 - 614	5.35 - 5.46
2.1735 - 2.1905	16.80425 - 16.80475	960 - 1240	7.25 - 7.75
4.125 - 4.128	25.5 - 25.67	1300 - 1427	8.025 - 8.5
4.17725 - 4.17775	37.5 - 38.25	1435 - 1626.5	9.0 - 9.2
4.20725 - 4.20775	73 - 74.6	1645.5 - 1646.5	9.3 - 9.5
6.215 - 6.218	74.8 - 75.2	1660 - 1710	10.6 - 12.7
6.26775 - 6.26825	108 - 121.94	1718.8 - 1722.2	13.25 - 13.4
6.31175 - 6.31225	123 - 138	2200 - 2300	14.47 - 14.5
8.291 - 8.294	149.9 - 150.05	2310 - 2390	15.35 - 16.2
8.362 - 8.366	156.52475 - 156.52525	2483.5 - 2500	17.7 - 21.4
8.37625 - 8.38675	156.7 - 156.9	2690 - 2900	22.01 - 23.12
8.41425 - 8.41475	162.0125 - 167.17	3260 - 3267	23.6 - 24.0
12.29 - 12.293	167.72 - 173.2	3332 - 3339	31.2 - 31.8
12.51975 - 12.52025	240 - 285	3345.8 - 3358	36.43 - 36.5
12.57675 - 12.57725	322 - 335.4	3600 - 4400	(²)
13.36 - 13.41	--	--	--

For 15.407(b)(5) requirement:

For transmitters operating within the 5.925-7.125 GHz band: Any emissions outside of the 5.925-7.125 GHz band must not exceed an EIRP. of -27 dBm/MHz.

Refer to 987594 D02 U-NII 6 GHz EMC Measurement v03 clause G - Unwanted Emission Measurement

Use guidance in KDB 789033 for measurements below 1000 MHz and above 1000 MHz. Unwanted emissions outside of restricted bands are measured with a RMS detector. In addition, 15.35(b) applies where the peak emissions must be limited to no more than 20 dB above the average limit.

All out of band emissions appearing in a restricted band as specified in Section 15.205 of the Title 47 CFR must not exceed the limits shown in Table per Section 15.209.

FCC Part 15 Subpart C Paragraph 15.209		
Frequency [MHz]	Field Strength [μV/m]	Measured Distance [Meters]
0.009 - 0.490	2400/F (kHz)	300
0.490 - 1.705	24000/F (kHz)	30
1.705 - 30	30	30
30 - 88	100	3
88 - 216	150	3
216 - 960	200	3
Above 960	500	3

6.9.2. Test Procedure

KDB 789033 D02 v02r01-Section II)G)

6.9.3. Test Setting

Peak Measurements above 1 GHz

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 1 MHz
3. VBW = 3 MHz
4. Detector = Peak
5. Sweep time = Auto couple
6. Trace mode = Max hold
7. Trace was allowed to stabilize

Average Measurements above 1 GHz (Method VB)


1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 1 MHz
3. VBW; If the EUT is configured to transmit with duty cycle $\geq 98\%$, set VBW = 10 Hz.

If the EUT duty cycle is $< 98\%$, set $VBW \geq 1/T$. T is the minimum transmission duration.

802.11ax-HE20	VBW = 680 Hz	802.11be-EHT40	VBW = 1300 Hz
802.11ax-HE40	VBW = 1300 Hz	802.11be-EHT80	VBW = 2700 Hz
802.11ax-HE80	VBW = 2700 Hz	802.11be-EHT160	VBW = 4300 Hz
802.11ax-HE160	VBW = 4300 Hz	802.11be-EHT320	VBW = 6800 Hz
802.11be-EHT20	VBW = 680 Hz	802.11be-EHT320	VBW = 6800 Hz

4. As an alternative, the instrument may be set to linear detector mode. Ensure that video filtering is applied in linear voltage domain (rather than in a log or dB domain). Some instruments require linear display mode in order to accomplish this. Others have a setting for Average-VBW Type, which can be set to "Voltage" regardless of the display mode
5. Detector = Peak
6. Sweep time = Auto
7. Trace mode = Max hold
8. Trace was allowed to stabilize

6.9.4. Test Setup

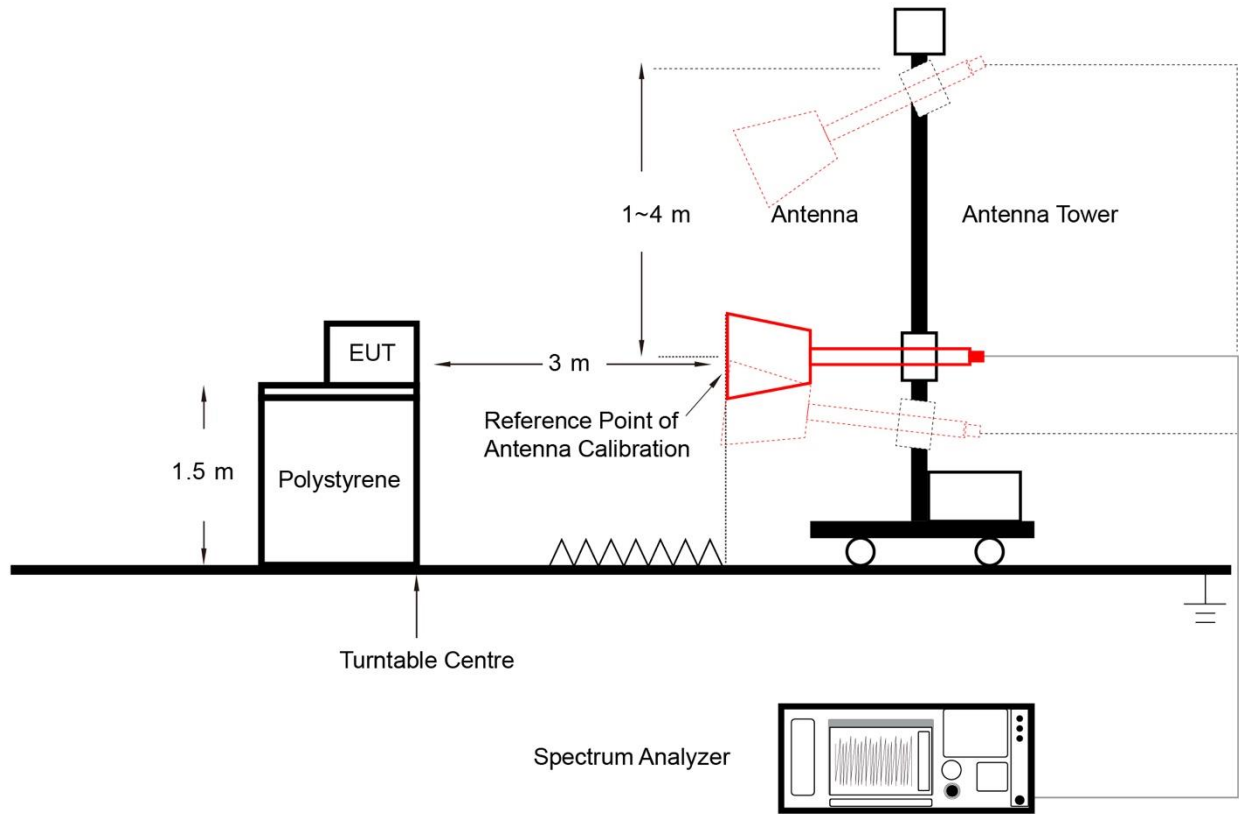

6.9.5. Test Result

Refer to Appendix A.9.

6.10. AC Conducted Emissions Measurement


6.10.1. Test Limit

FCC Part 15.207 Limits		
Frequency (MHz)	QP (dB μ V)	AV (dB μ V)
0.15 - 0.50	66 - 56	56 - 46
0.50 - 5.0	56	46
5.0 - 30	60	50

Note 1: The lower limit shall apply at the transition frequencies.

Note 2: The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.5 MHz.

6.10.2. Test Setup

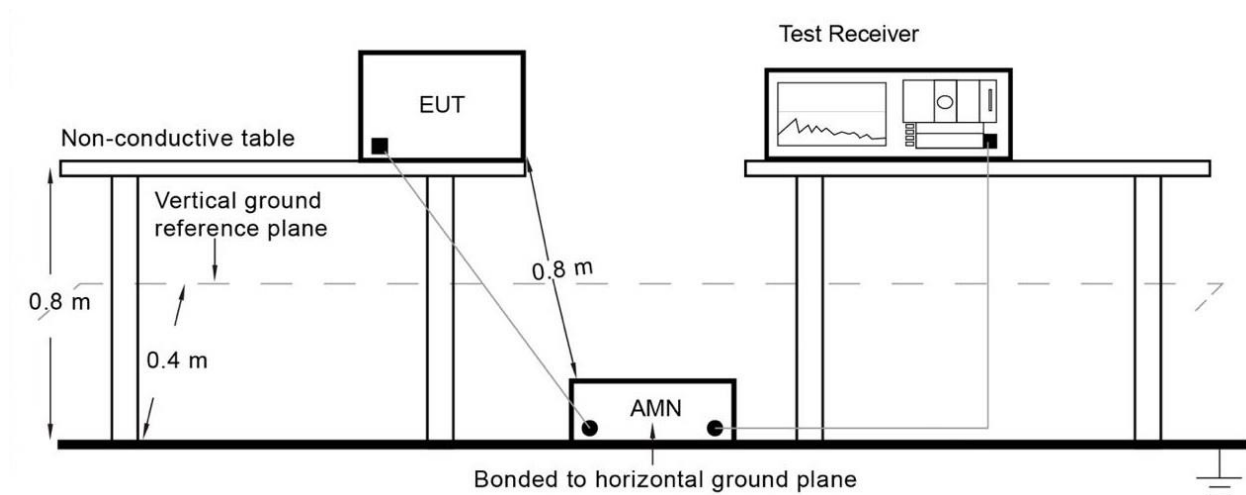

6.10.3. Test Result

Refer to Appendix A.10.

Appendix A - Test Result

A.1 Duty Cycle Test Result


Group 3 Radio 2 HB

Test Site	SIP-AC2	Test Engineer	Allen Zou
Test Date	2024-05-05 ~ 2024-05-07		


Test Mode	Duty Cycle	Test Mode	Duty Cycle
802.11ax-HE20	93.05%	802.11be-EHT40	89.31%
802.11ax-HE40	89.00%	802.11be-EHT80	84.62%
802.11ax-HE80	83.96%	802.11be-EHT160	80.06%
802.11ax-HE160	79.85%	802.11be-EHT320	78.04%
802.11be-EHT20	93.29%	--	--

Duty Cycle (T = Transmission Duration)


802.11ax-HE20 (T = 439.2 μ s)

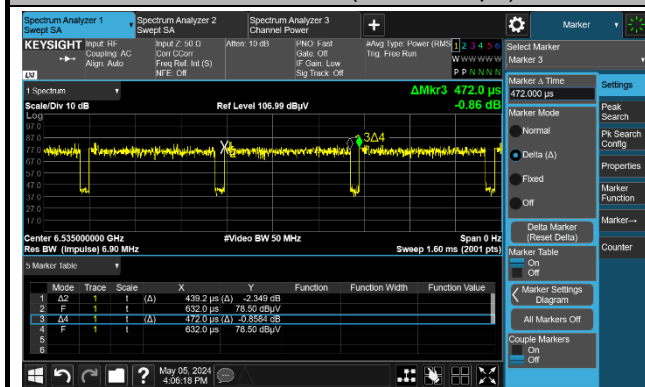


802.11ax-HE40 (T = 263.0 μ s)

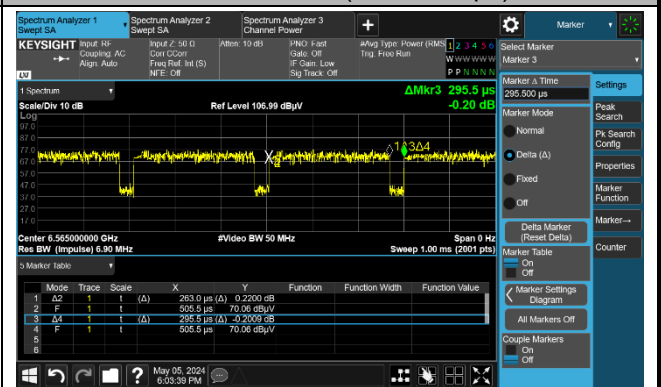

802.11ax-HE80 (T = 167.5 μ s)

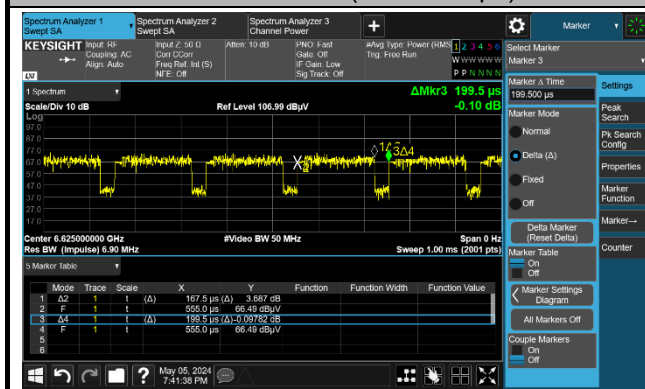


802.11ax-HE160 (T = 126.4 μ s)

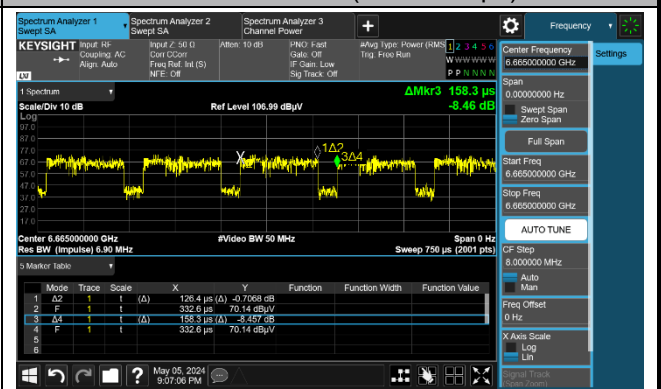


Duty Cycle (T = Transmission Duration)


802.11be-EHT20 (T = 444.8 μ s)

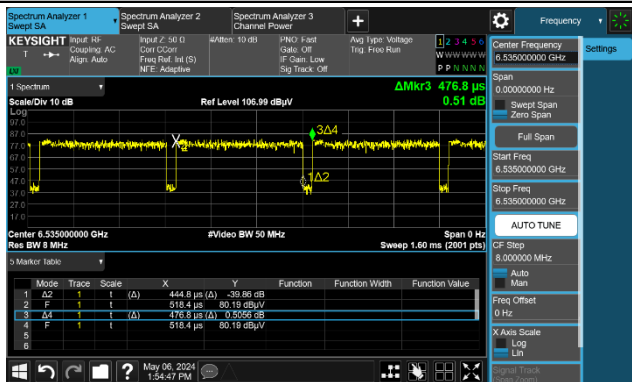


802.11be-EHT40 (T = 267.5 μ s)

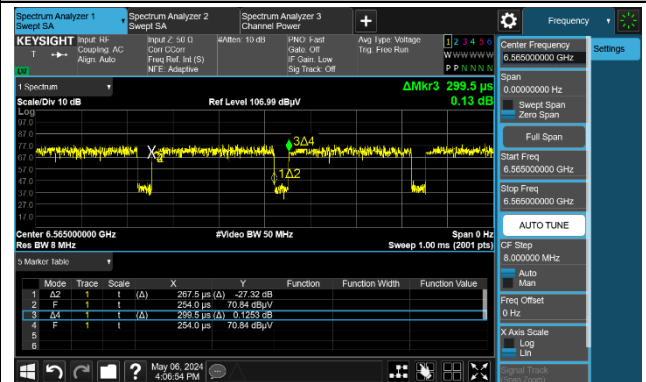


802.11be-EHT80 (T = 176.0 μ s)

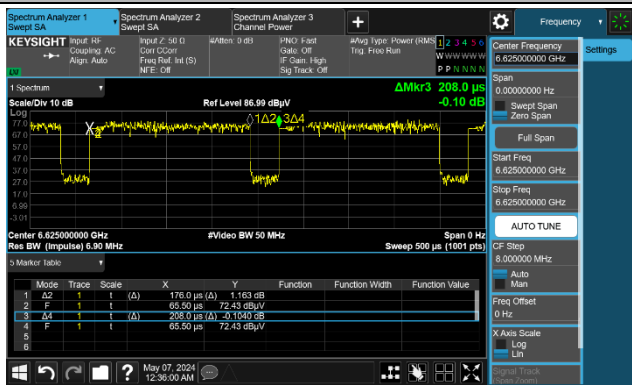

802.11be-EHT160 (T = 130.5 μ s)

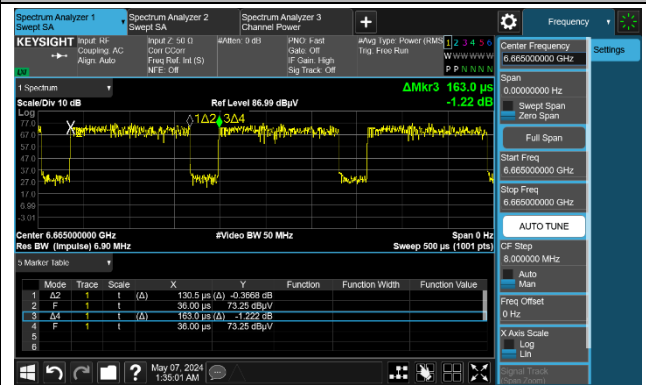

802.11be-EHT320 (T = 115.5 μ s)

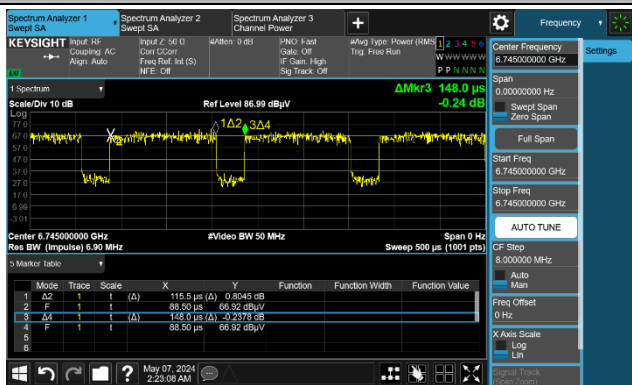

Group 3 Radio 0 LB

Test Site	SIP-AC2	Test Engineer	Allen Zou
Test Date	2024-04-18 ~ 2024-04-19		


Test Mode	Duty Cycle	Test Mode	Duty Cycle
802.11ax-HE20	93.12%	802.11be-EHT40	89.32%
802.11ax-HE40	89.34%	802.11be-EHT80	84.72%
802.11ax-HE80	84.41%	802.11be-EHT160	80.69%
802.11ax-HE160	80.29%	802.11be-EHT320	78.69%
802.11be-EHT20	93.29%	--	--

Duty Cycle (T = Transmission Duration)

802.11ax-HE20 (T = 433.0 μ s)




802.11ax-HE40 (T = 264.0 μ s)

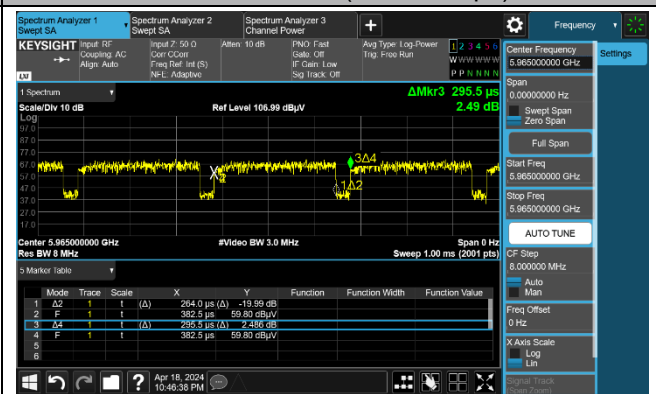

802.11ax-HE80 (T = 168.4 μ s)




802.11ax-HE160 (T = 127.5 μ s)

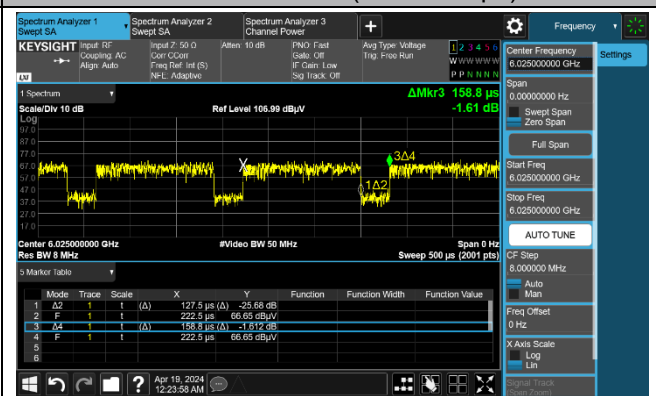


Duty Cycle (T = Transmission Duration)


802.11be-EHT20 (T = 444.8 μ s)

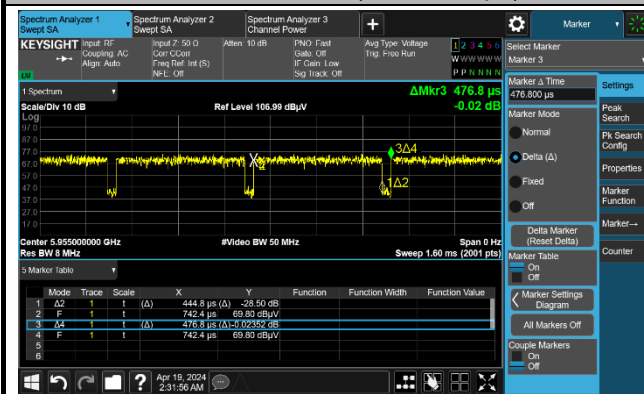


802.11be-EHT40 (T = 267.5 μ s)

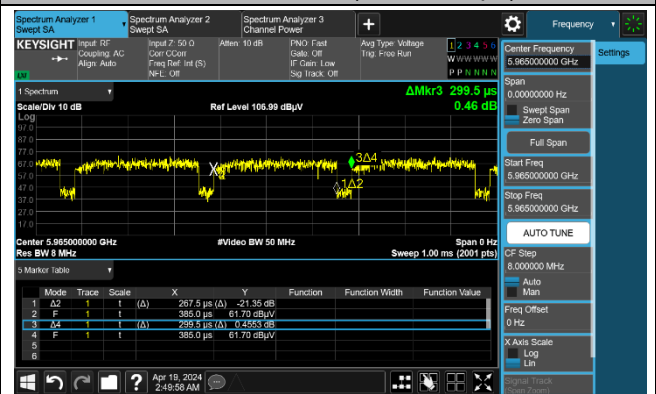


802.11be-EHT80 (T = 176.3 μ s)

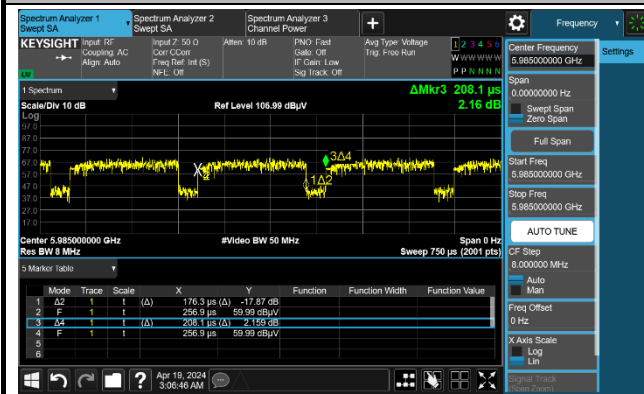

802.11be-EHT160 (T = 131.6 μ s)

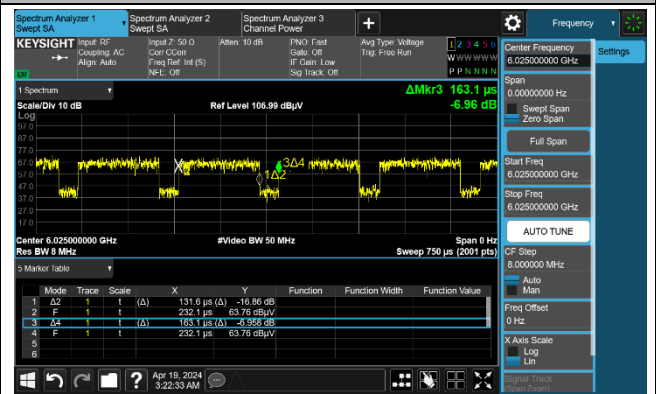

802.11be-EHT320 (T = 116.3 μ s)

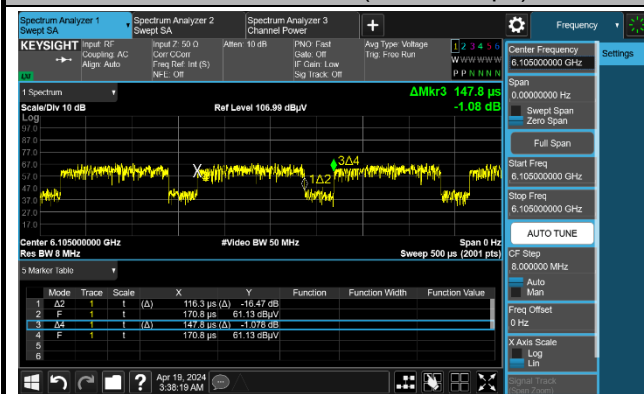

A.2 26 dB Bandwidth Test Result

Group 3 Radio 2 HB

Test Site	SIP-AC2	Test Engineer	Allen Zou
Test Date	2024-05-07	Filter	3#

Test Mode	Data Rate/ MCS	Channel No.	Frequency (MHz)	26 dB Bandwidth (MHz)	99% Bandwidth (MHz)	Test Limit (MHz)
802.11ax-HE20	MCS0	117	6535	21.50	19.083	≤ 320
802.11ax-HE20	MCS0	153	6715	21.67	19.091	≤ 320
802.11ax-HE20	MCS0	181	6855	21.58	19.119	≤ 320
802.11ax-HE20	MCS0	185	6875	21.53	19.047	≤ 320
802.11ax-HE20	MCS0	189	6895	21.61	19.166	≤ 320
802.11ax-HE20	MCS0	213	7015	21.47	19.066	≤ 320
802.11ax-HE20	MCS0	229	7095	21.57	19.110	≤ 320
802.11ax-HE40	MCS0	123	6565	40.49	37.711	≤ 320
802.11ax-HE40	MCS0	147	6685	40.34	37.687	≤ 320
802.11ax-HE40	MCS0	179	6845	40.37	37.715	≤ 320
802.11ax-HE40	MCS0	187	6885	40.33	37.718	≤ 320
802.11ax-HE40	MCS0	195	6925	40.35	37.775	≤ 320
802.11ax-HE40	MCS0	211	7005	40.19	37.692	≤ 320
802.11ax-HE40	MCS0	227	7085	40.23	37.718	≤ 320
802.11ax-HE80	MCS0	135	6625	81.20	77.152	≤ 320
802.11ax-HE80	MCS0	151	6705	81.52	77.137	≤ 320
802.11ax-HE80	MCS0	167	6785	81.37	77.183	≤ 320
802.11ax-HE80	MCS0	183	6865	81.42	77.208	≤ 320
802.11ax-HE80	MCS0	199	6945	81.30	77.174	≤ 320
802.11ax-HE80	MCS0	215	7025	81.43	77.224	≤ 320
802.11ax-HE160	MCS0	143	6665	163.6	156.15	≤ 320
802.11ax-HE160	MCS0	175	6825	164.2	156.23	≤ 320
802.11ax-HE160	MCS0	207	6985	163.7	156.31	≤ 320
802.11be-EHT20	MCS0	117	6535	21.37	19.062	≤ 320
802.11be-EHT20	MCS0	153	6715	21.57	19.114	≤ 320
802.11be-EHT20	MCS0	181	6895	21.74	19.138	≤ 320
802.11be-EHT20	MCS0	185	7015	21.72	19.103	≤ 320
802.11be-EHT20	MCS0	189	7095	21.47	19.114	≤ 320

Test Mode	Data Rate/ MCS	Channel No.	Frequency (MHz)	26 dB Bandwidth (MHz)	99% Bandwidth (MHz)	Test Limit (MHz)
802.11be-EHT40	MCS0	123	6565	40.38	37.761	≤ 320
802.11be-EHT40	MCS0	147	6685	40.49	37.726	≤ 320
802.11be-EHT40	MCS0	179	6845	40.39	37.744	≤ 320
802.11be-EHT40	MCS0	187	6885	40.39	37.731	≤ 320
802.11be-EHT40	MCS0	195	6925	40.56	37.737	≤ 320
802.11be-EHT40	MCS0	211	7005	40.02	37.697	≤ 320
802.11be-EHT40	MCS0	227	7085	40.34	37.755	≤ 320
802.11be-EHT80	MCS0	135	6625	81.64	77.319	≤ 320
802.11be-EHT80	MCS0	151	6705	81.90	77.187	≤ 320
802.11be-EHT80	MCS0	167	6785	81.60	77.210	≤ 320
802.11be-EHT80	MCS0	183	6865	81.71	77.200	≤ 320
802.11be-EHT80	MCS0	199	6945	81.90	77.199	≤ 320
802.11be-EHT80	MCS0	215	7025	81.48	77.127	≤ 320
802.11be-EHT160	MCS0	143	6665	163.9	156.04	≤ 320
802.11be-EHT160	MCS0	175	6825	163.5	156.12	≤ 320
802.11be-EHT160	MCS0	207	6985	163.4	156.17	≤ 320
802.11be-EHT320	MCS0	159	6745	326.9	314.59	≤ 320
802.11be-EHT320	MCS0	191	6905	328.6	314.84	≤ 320


Note:

For channels with a nominal bandwidth less than 320 MHz compliance is demonstrated by way of the 26 dB EBW.


For channels with a nominal bandwidth of 320 MHz compliance is demonstrated by way of the 99% BW.

802.11ax-HE20 26 dB & 99% Bandwidth


Channel 117 (6535 MHz)

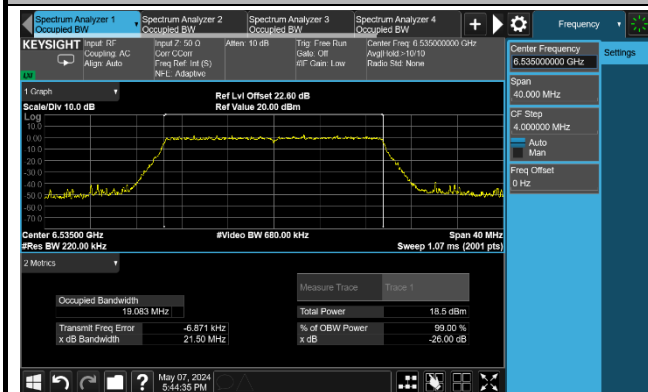


Channel 153 (6715 MHz)

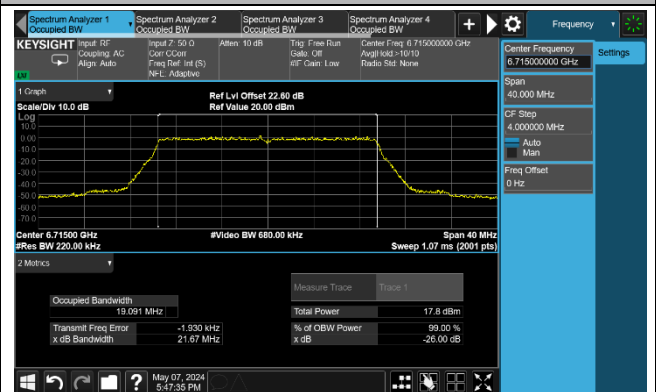


Channel 181 (6855 MHz)

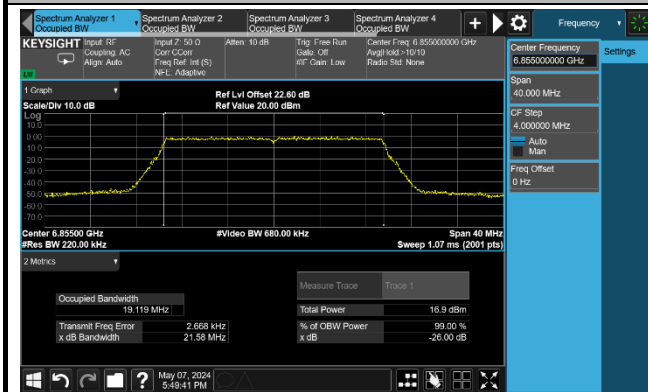


Channel 185 (6875 MHz)

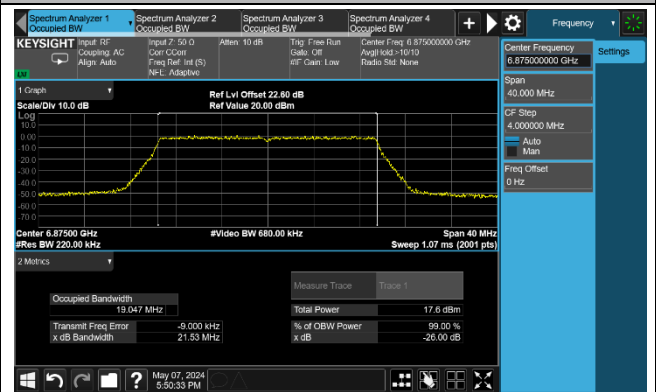


Channel 189 (6895 MHz)

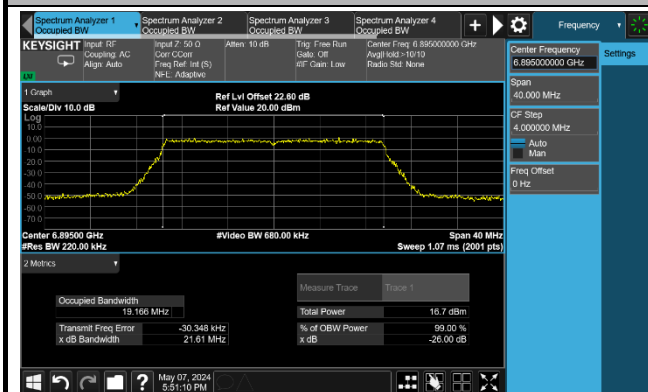

Channel 213 (7015 MHz)

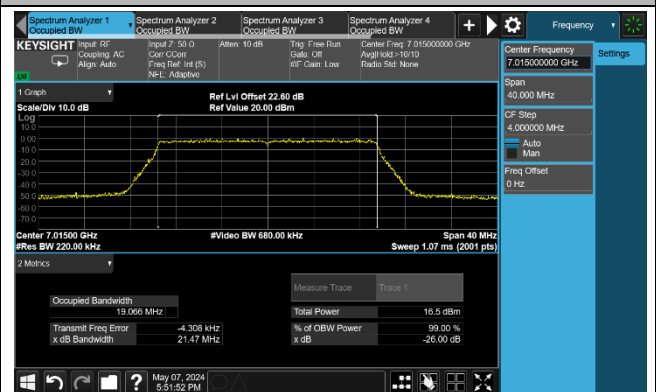


Channel 229 (7095 MHz)

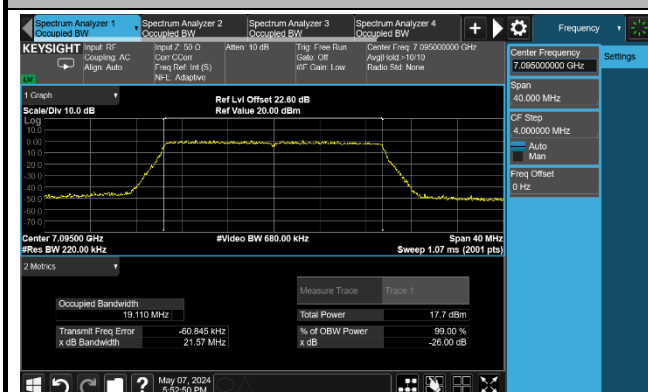


802.11ax-HE40 26 dB & 99% Bandwidth


Channel 123 (6565 MHz)

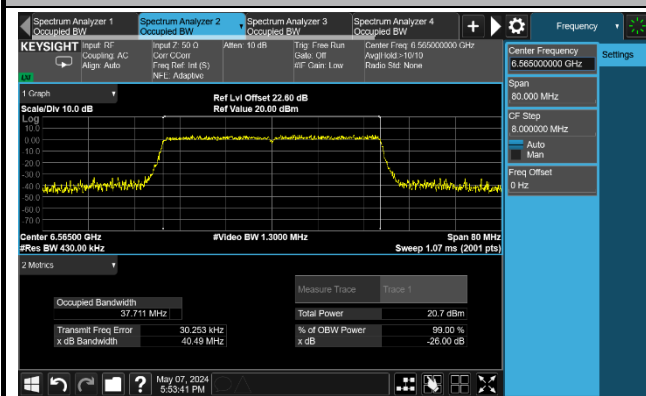


Channel 147 (6685 MHz)

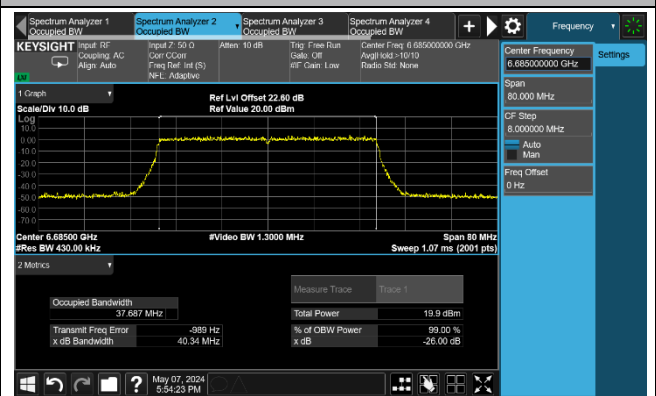


Channel 179 (6845 MHz)

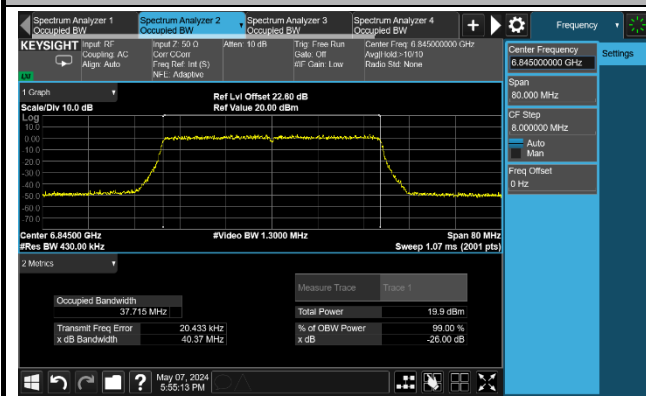


Channel 187 (6885 MHz)

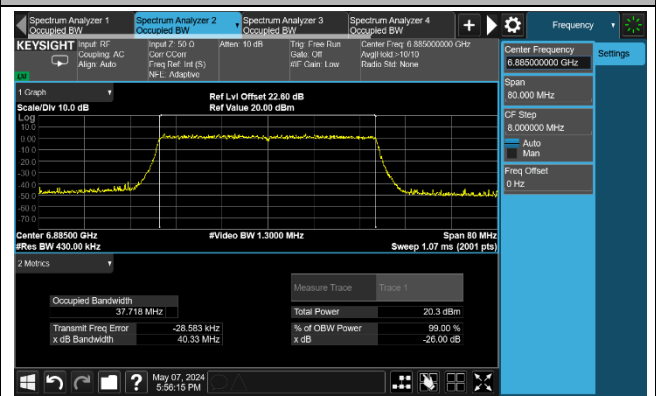


Channel 195 (6925 MHz)

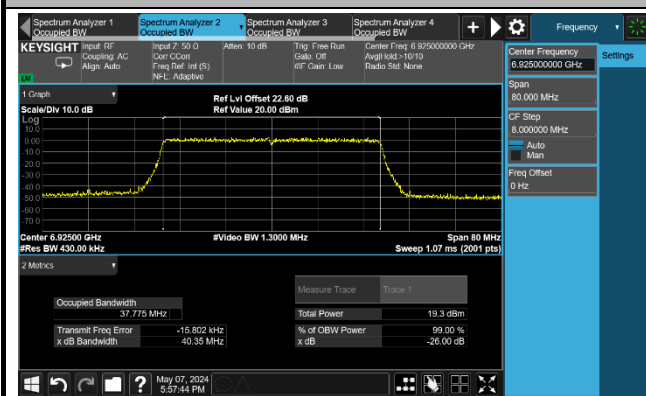

Channel 211 (7005 MHz)

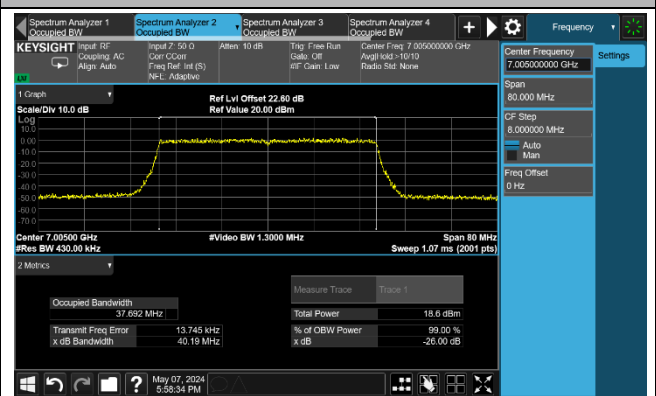


Channel 227 (7085 MHz)

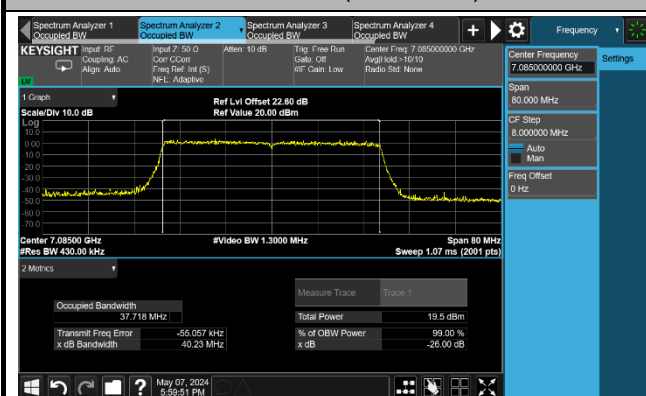


802.11ax-HE80 26 dB & 99% Bandwidth


Channel 135 (6625 MHz)

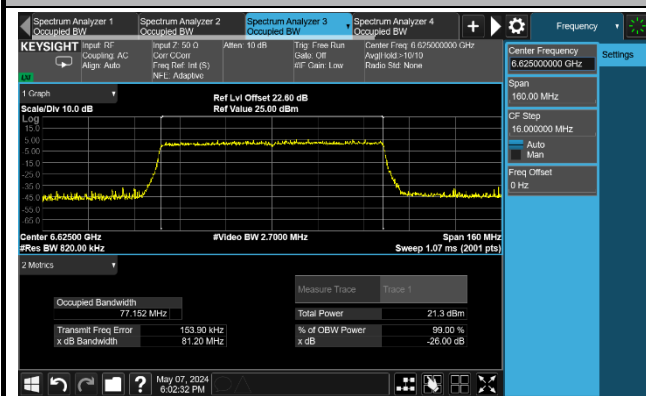


Channel 151 (6705 MHz)

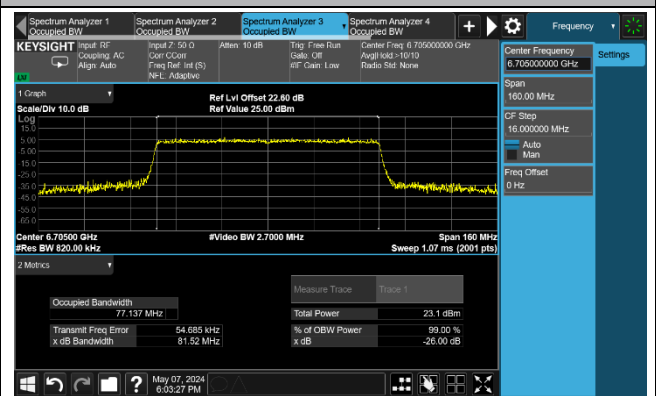


Channel 167 (6785 MHz)

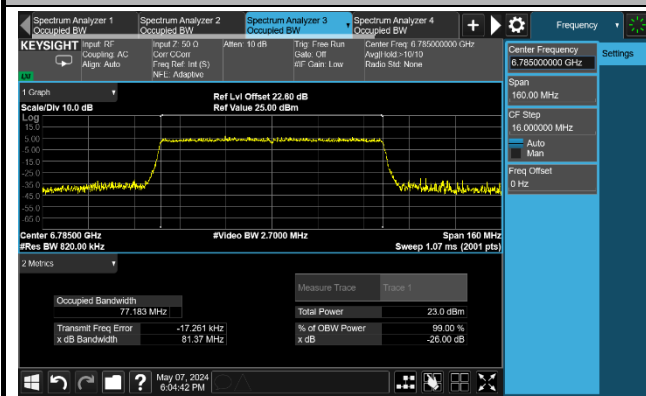


Channel 183 (6865 MHz)

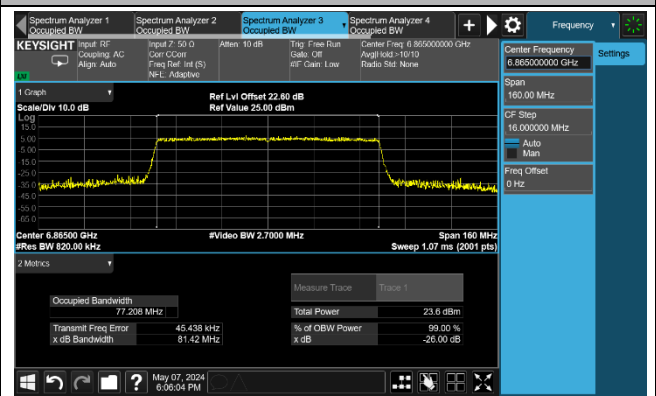


Channel 199 (6945 MHz)

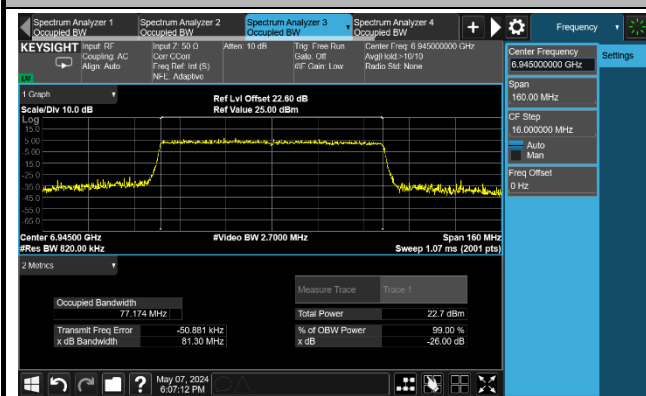


Channel 215 (7025 MHz)

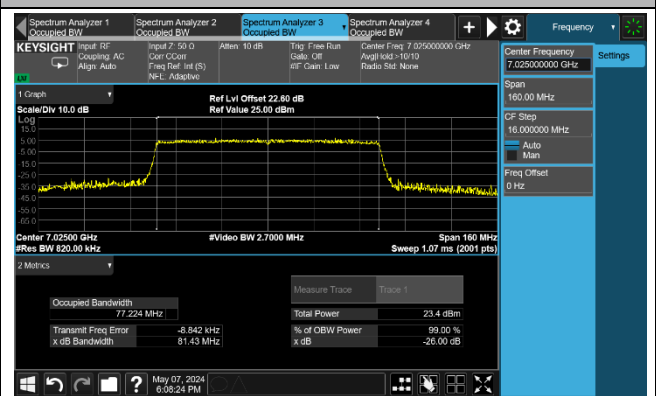

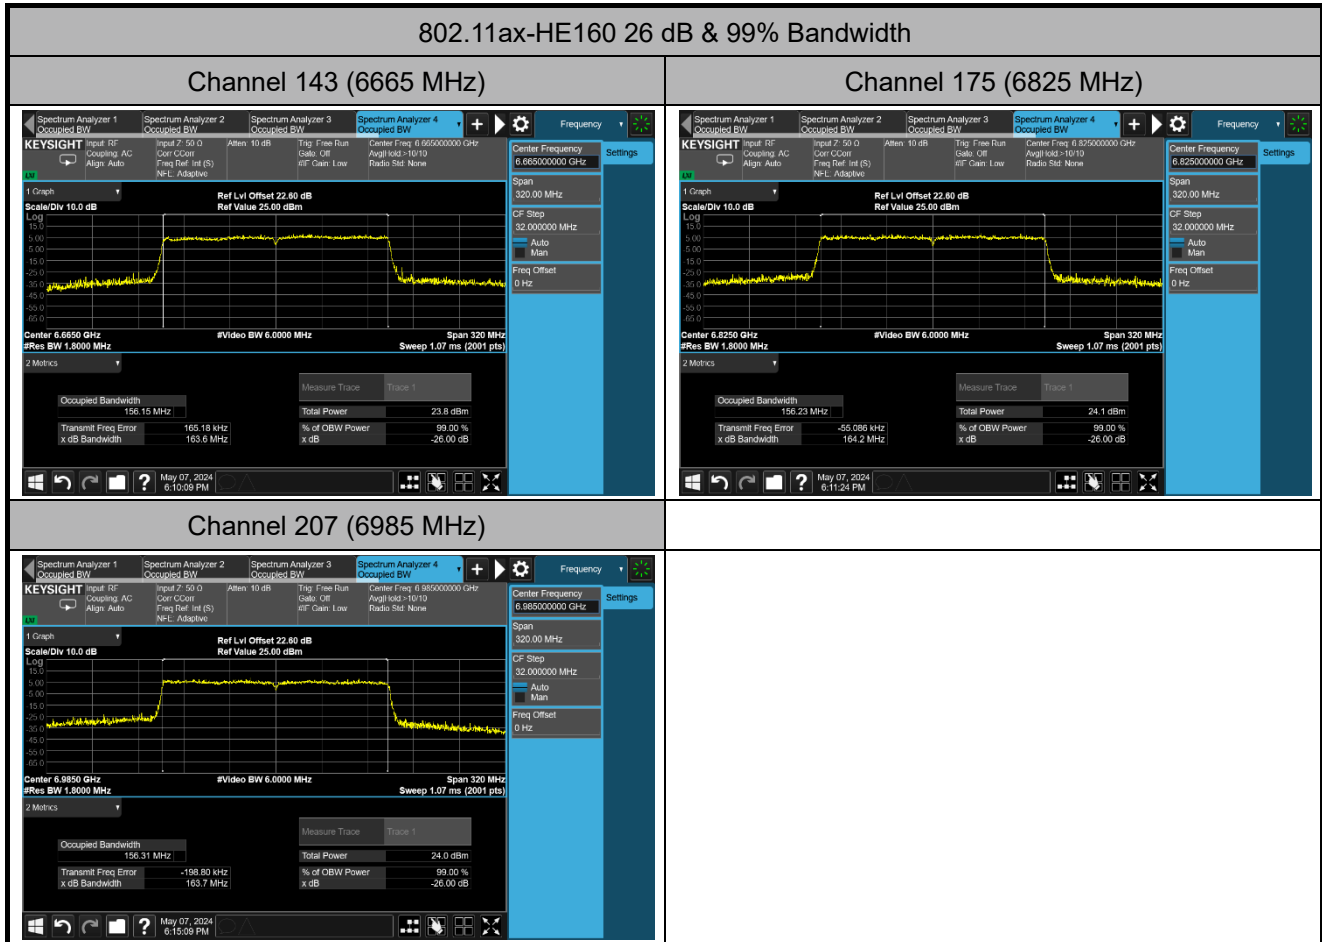


802.11be-EHT20 26 dB & 99% Bandwidth


Channel 117 (6535 MHz)

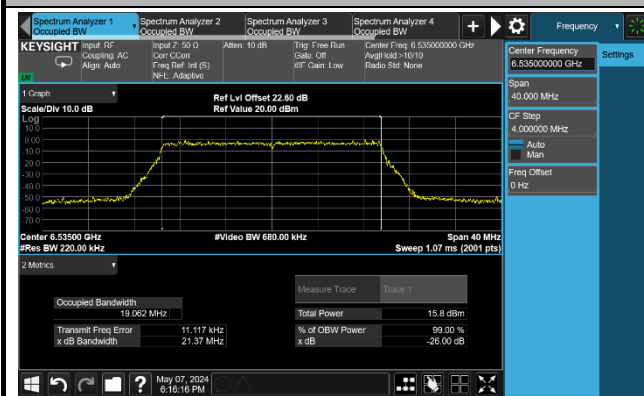


Channel 153 (6715 MHz)

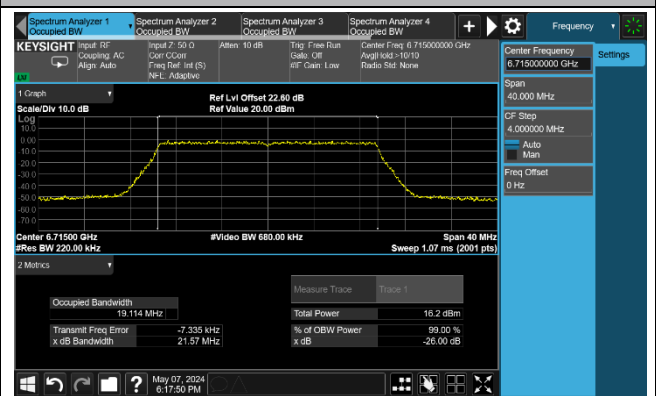


Channel 189 (6895 MHz)

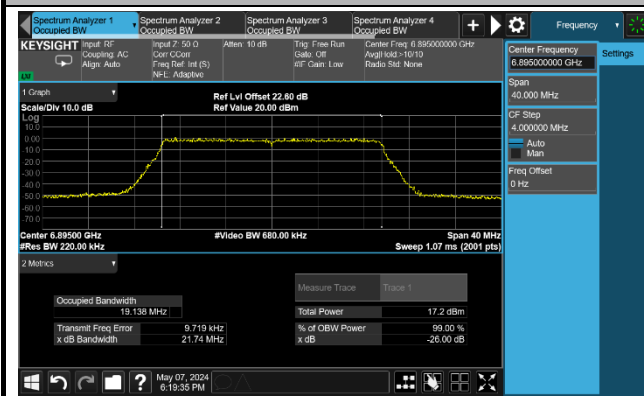

Channel 213 (7015 MHz)

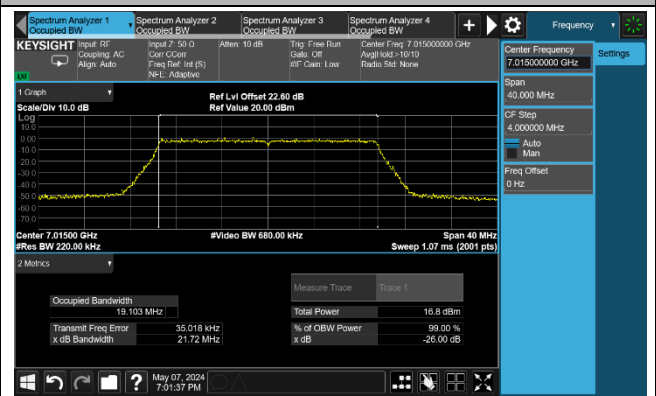


Channel 229 (7095 MHz)

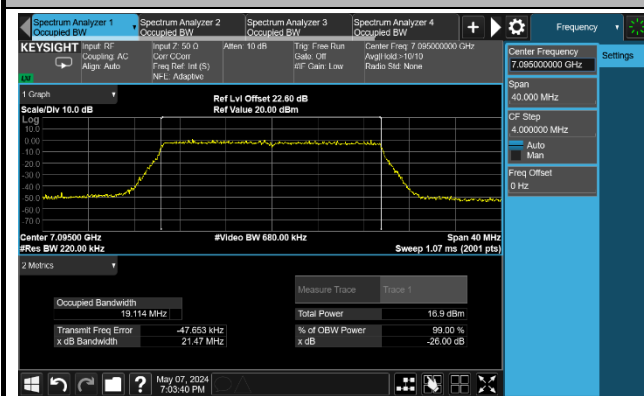


802.11be-EHT40 26 dB & 99% Bandwidth


Channel 123 (6565 MHz)

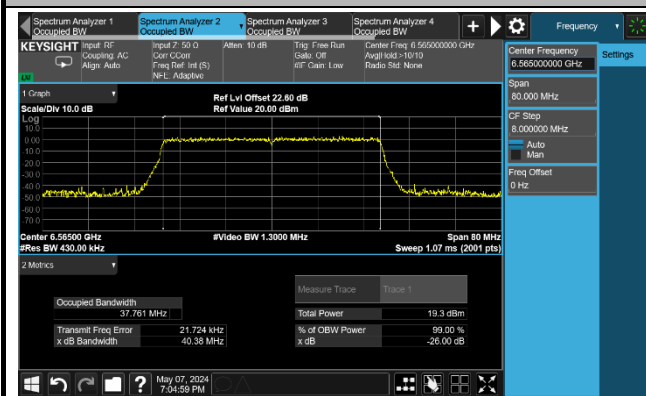


Channel 147 (6685 MHz)

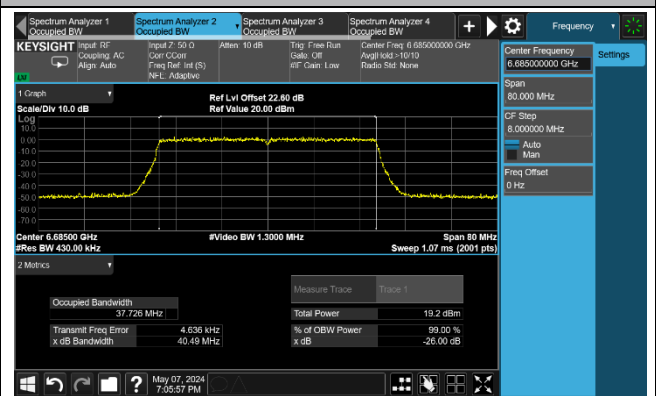


Channel 179 (6845 MHz)

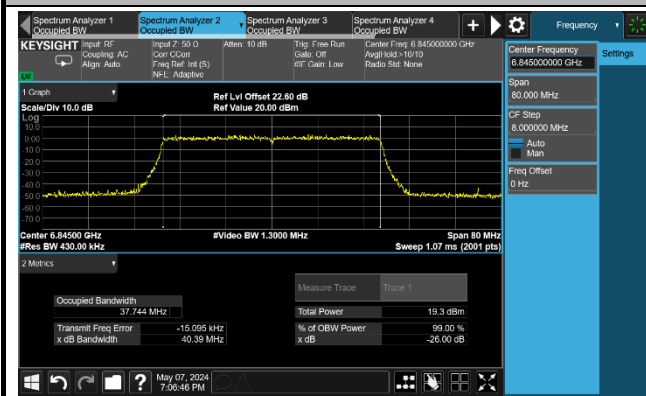


Channel 187 (6885 MHz)

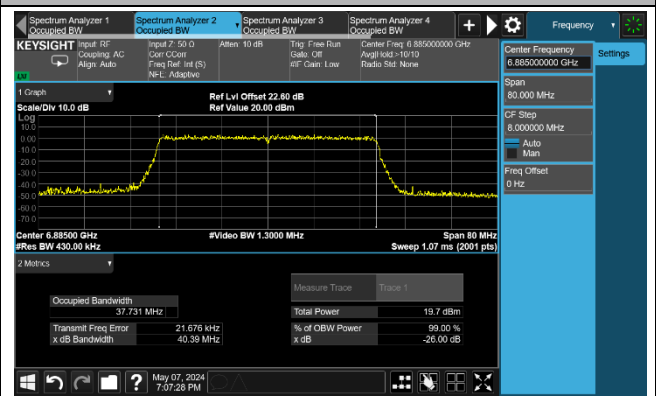


Channel 195 (6925 MHz)

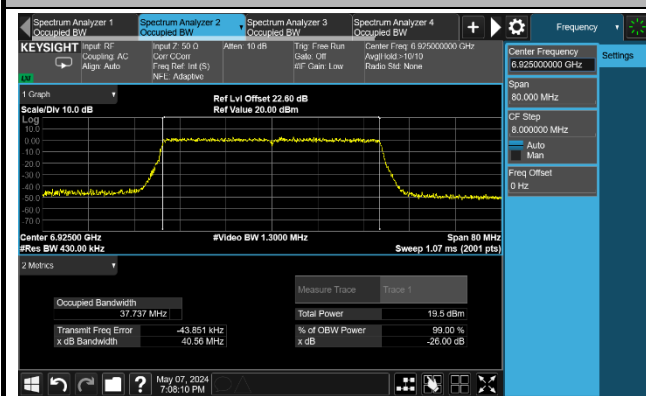

Channel 211 (7005 MHz)

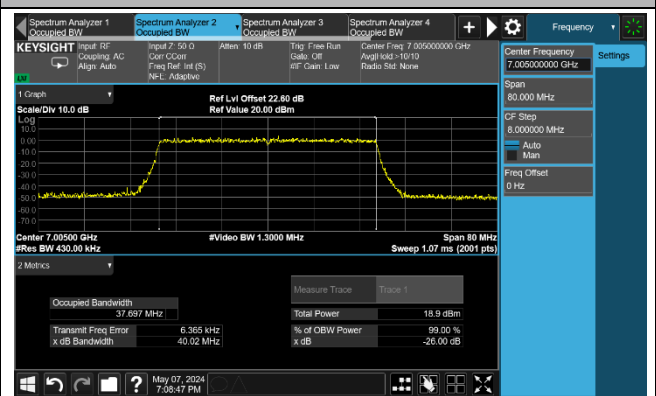


Channel 227 (7085 MHz)

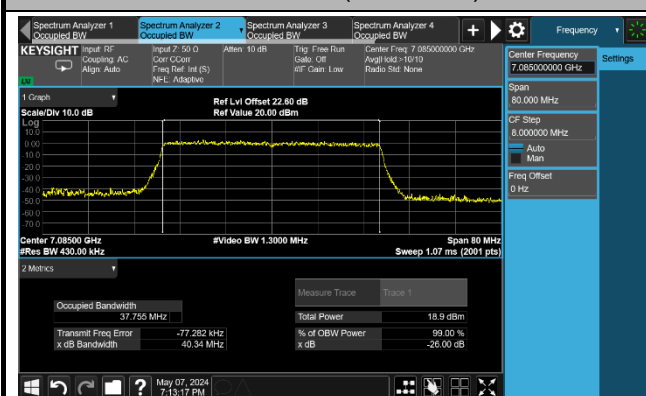


802.11be-EHT80 26 dB & 99% Bandwidth


Channel 135 (6625 MHz)

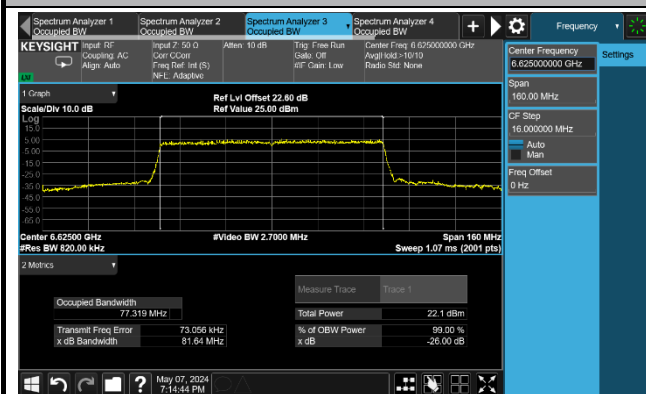

Channel 151 (6705 MHz)

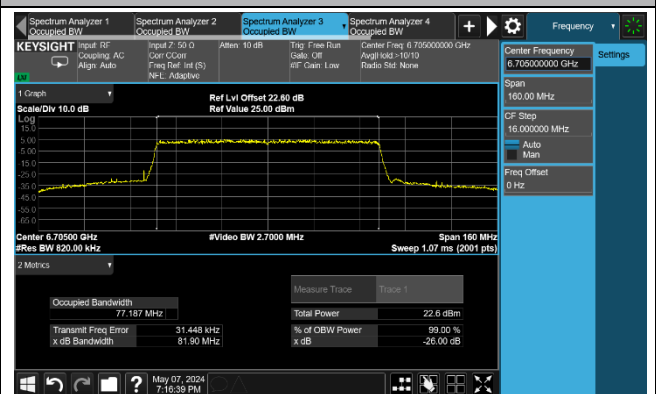


Channel 167 (6785 MHz)

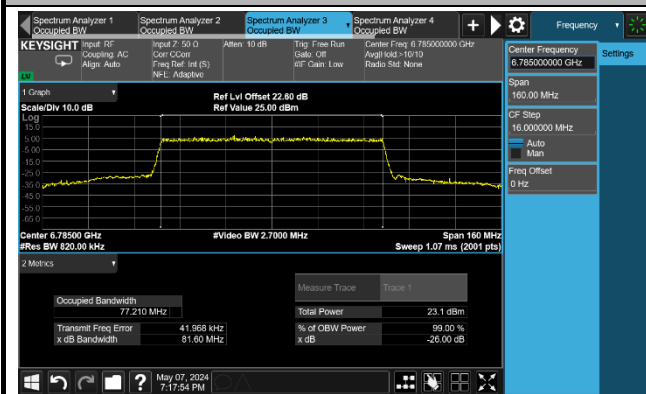

Channel 183 (6865 MHz)



Channel 199 (6945 MHz)

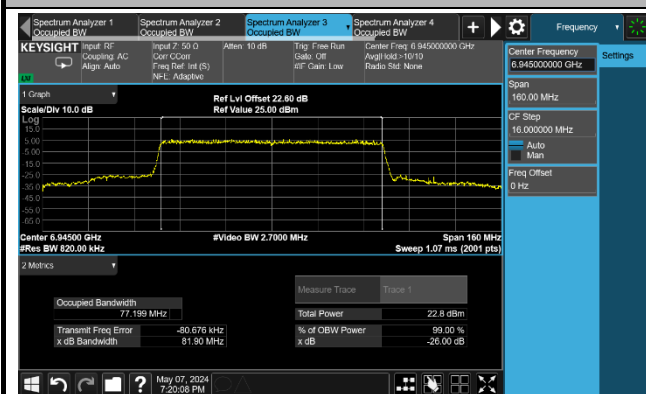

Channel 215 (7025 MHz)

