


Site: WZ-AC1	Test Date: 2024-04-29
Limit: FCC_6G_RE (3 m)	Engineer: Frank Xue
Probe: BBHA9120D_1167_1-18 GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: AC 120 V/60 Hz
Test Mode: Transmit by 802.11be-EHT160 at 6025 MHz	

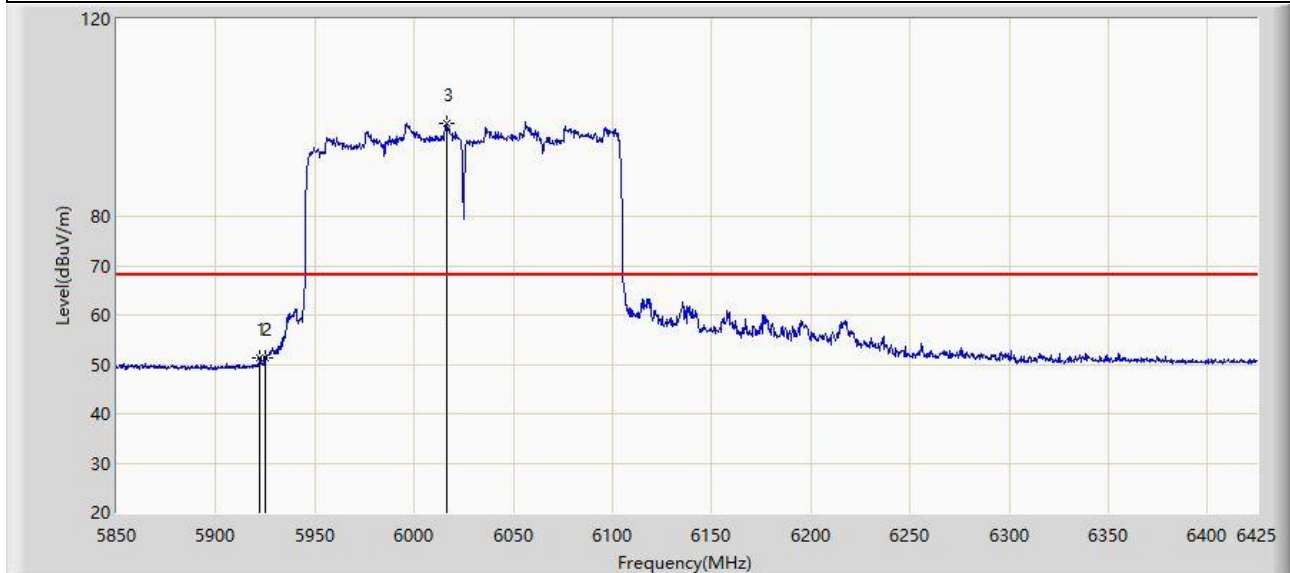


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	5922.163	51.286	45.737	-16.914	68.200	5.550	AV
2		5925.000	51.182	45.628	-17.018	68.200	5.554	AV
3		6016.750	98.750	93.129	N/A	N/A	5.621	AV

Note 1: " * " indicates the worst-case emission level observed during the measurement.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC1	Test Date: 2024-04-30
Limit: FCC_6G_RE (3 m)	Engineer: Frank Xue
Probe: BBHA9120D_1167_1-18 GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: AC 120 V/60 Hz
Test Mode: Transmit by 802.11be-EHT320 at 6105 MHz	

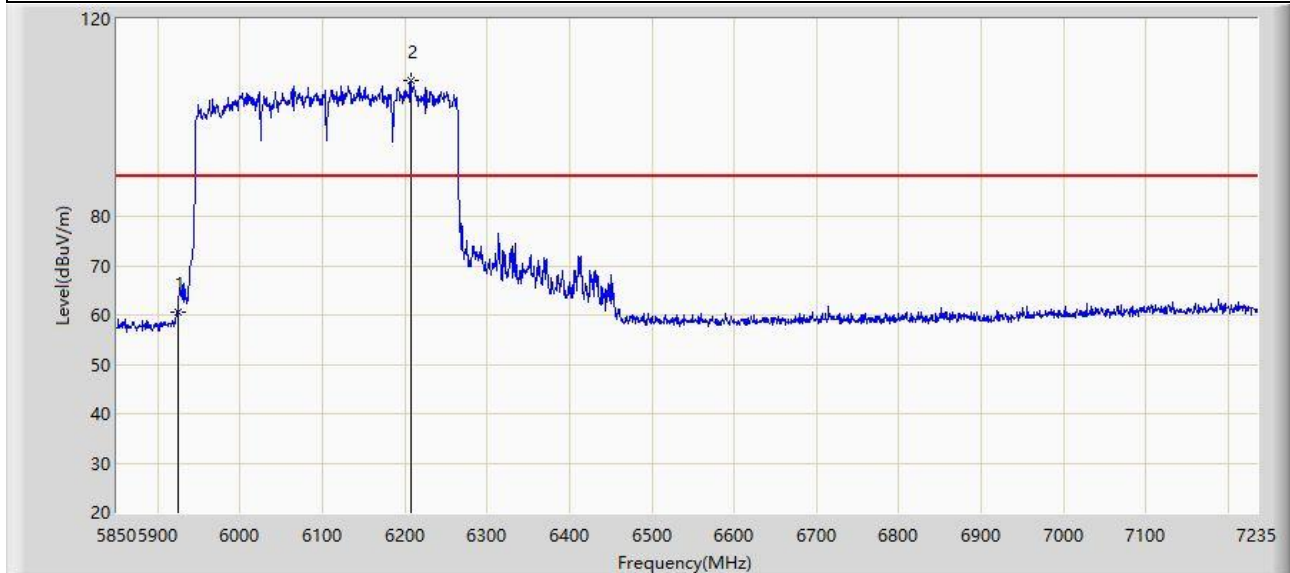


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	5925.000	60.722	55.168	-27.478	88.200	5.554	PK
2		6207.330	107.439	101.265	N/A	N/A	6.174	PK

Note 1: " * " indicates the worst-case emission level observed during the measurement.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC1	Test Date: 2024-04-30
Limit: FCC_6G_RE (3 m)	Engineer: Frank Xue
Probe: BBHA9120D_1167_1-18 GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: AC 120 V/60 Hz
Test Mode: Transmit by 802.11be-EHT320 at 6105 MHz	

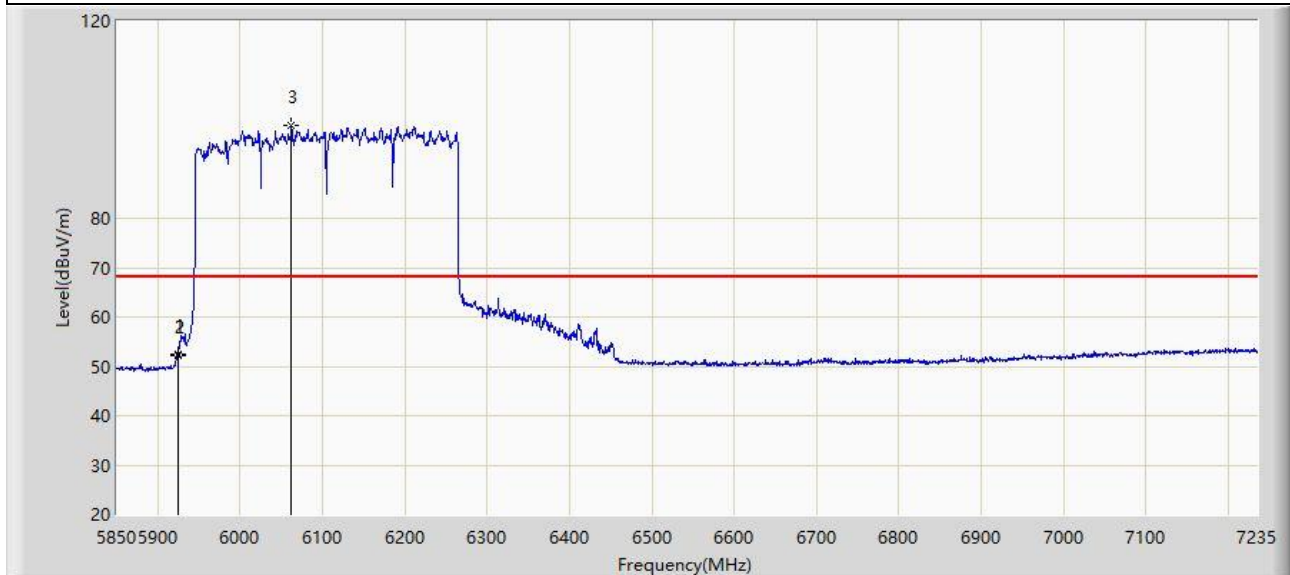


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	5924.098	52.462	46.905	-15.738	68.200	5.557	AV
2		5925.000	52.307	46.753	-15.893	68.200	5.554	AV
3		6062.598	98.743	93.285	N/A	N/A	5.457	AV

Note 1: " * " indicates the worst-case emission level observed during the measurement.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC1	Test Date: 2024-04-30
Limit: FCC_6G_RE (3 m)	Engineer: Frank Xue
Probe: BBHA9120D_1167_1-18 GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: AC 120 V/60 Hz
Test Mode: Transmit by 802.11be-EHT320 at 6105 MHz	

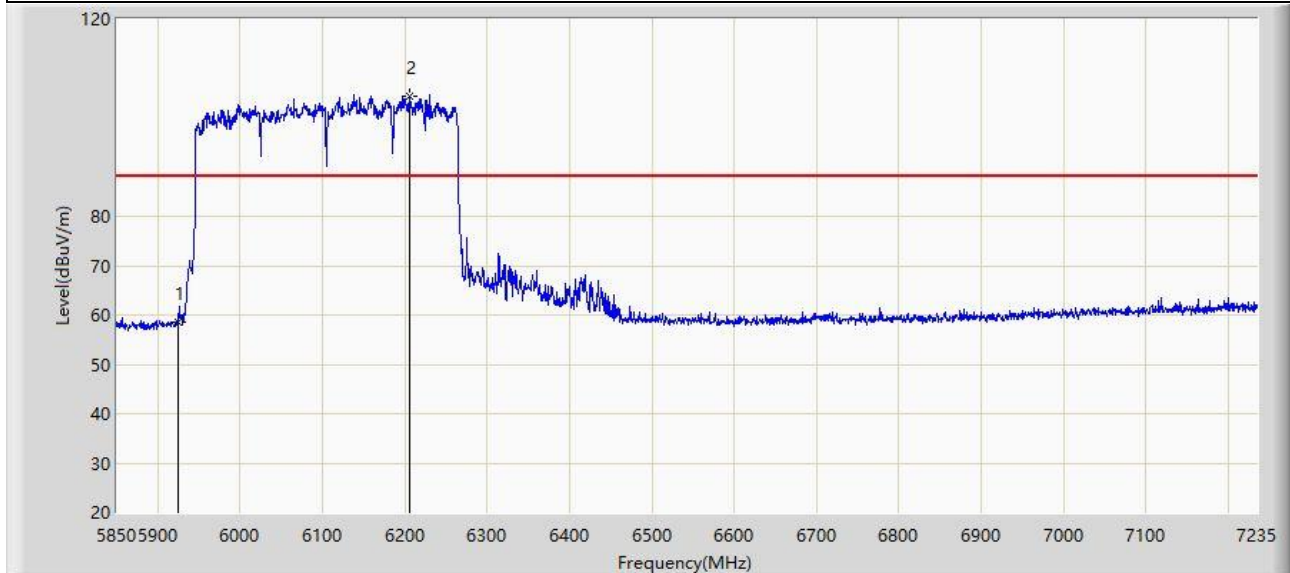


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	5925.000	58.624	53.070	-29.576	88.200	5.554	PK
2		6205.252	104.479	98.307	N/A	N/A	6.173	PK

Note 1: " * " indicates the worst-case emission level observed during the measurement.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC1	Test Date: 2024-04-30
Limit: FCC_6G_RE (3 m)	Engineer: Frank Xue
Probe: BBHA9120D_1167_1-18 GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: AC 120 V/60 Hz
Test Mode: Transmit by 802.11be-EHT320 at 6105 MHz	

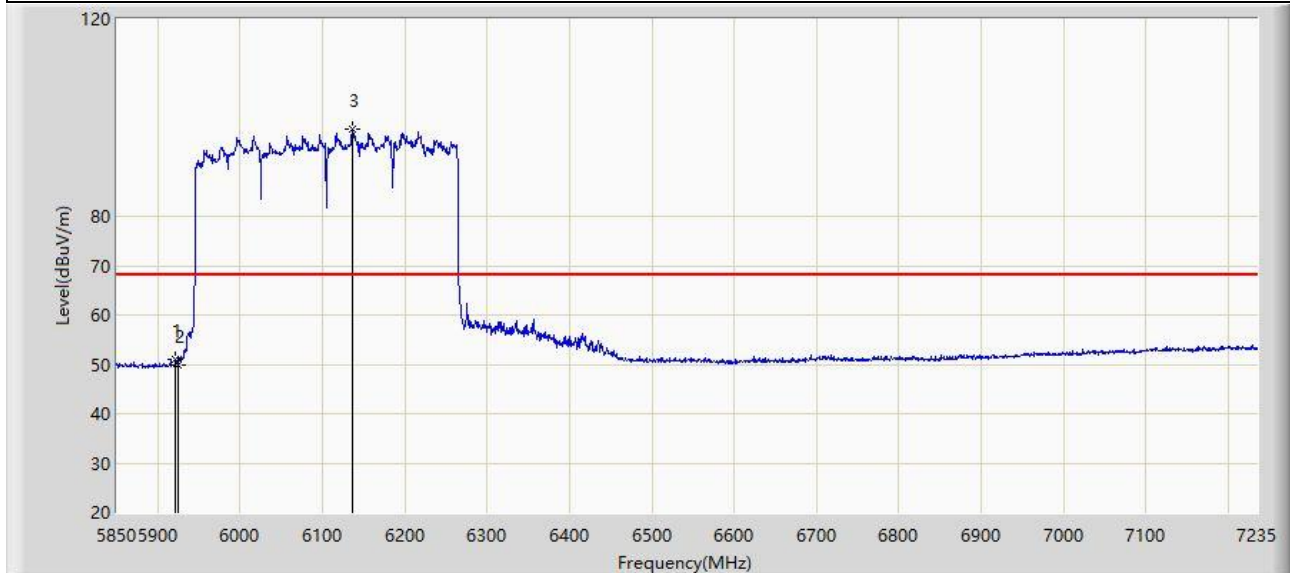

No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	5922.020	50.930	45.382	-17.270	68.200	5.548	AV
2		5925.000	49.999	44.445	-18.201	68.200	5.554	AV
3		6136.695	97.695	92.013	N/A	N/A	5.683	AV


Note 1: " * " indicates the worst-case emission level observed during the measurement.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

A.10 AC Conducted Emissions Test Result

Site	WZ-SR2	Test Date	2025-12-05
Temperature	19.6 °C	Humidity	34.2%
Limit	FCC Part 15.207_CE_Mains	Test Engineer	Ajin Fan
Test Voltage	AC 120 V/60 Hz	Polarity	Line
Test Mode	Transmit by 802.11be-EHT320 at 6265 MHz		

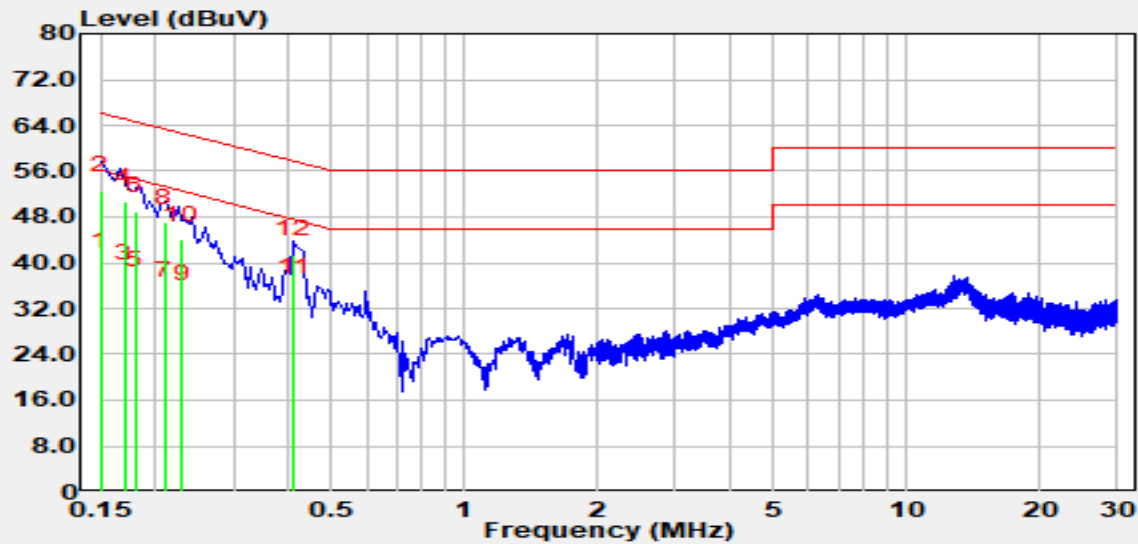


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB)	Measurement (dBμV)	Margin (dB)	Limit (dBμV)	Detector
1		0.15	29.60	9.67	39.27	-16.73	56.00	Average
2		0.15	42.90	9.67	52.57	-13.43	66.00	QP
3		0.17	27.70	9.68	37.38	-17.58	54.96	Average
4		0.17	41.00	9.68	50.68	-14.28	64.96	QP
5		0.18	26.40	9.68	36.08	-18.41	54.49	Average
6		0.18	39.30	9.68	48.98	-15.51	64.49	QP
7		0.21	24.60	9.69	34.29	-18.92	53.21	Average
8		0.21	37.30	9.69	46.99	-16.22	63.21	QP
9		0.23	24.00	9.69	33.69	-18.76	52.45	Average
10		0.23	34.30	9.69	43.99	-18.46	62.45	QP
11	*	0.41	25.00	9.76	34.76	-12.89	47.65	Average
12		0.41	31.70	9.76	41.46	-16.19	57.65	QP

Notes:

1. " * " indicates the worst-case emission level observed during the measurement.
2. C.F (dB) = LISN Factor (dB) + Cable Loss (dB).
3. Measurement (dBμV) = Reading (dBμV) + C.F (dB).

Site	WZ-SR2	Test Date	2025-12-05
Temperature	19.6 °C	Humidity	34.2%
Limit	FCC Part 15.207_CE_Mains	Test Engineer	Ajin Fan
Test Voltage	AC 120 V/60 Hz	Polarity	Neutral
Test Mode	Transmit by 802.11be-EHT320 at 6265 MHz		

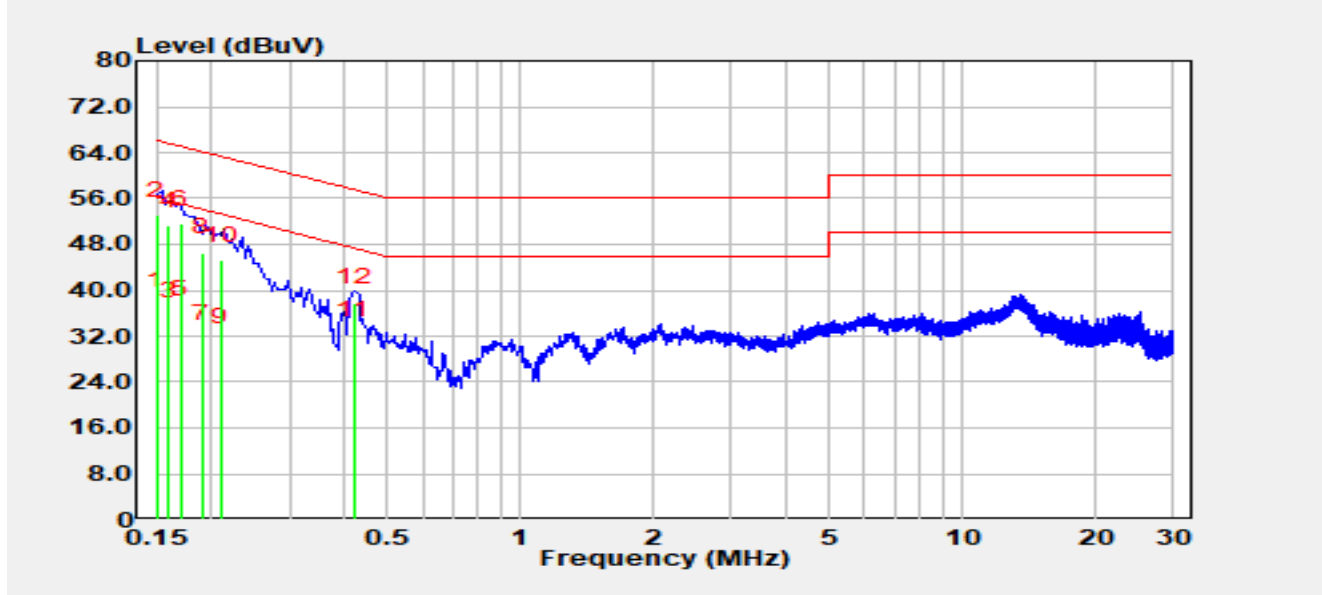

No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB)	Measurement (dBμV)	Margin (dB)	Limit (dBμV)	Detector
1		0.15	27.40	9.79	37.19	-18.81	56.00	Average
2	*	0.15	43.30	9.79	53.09	-12.91	66.00	QP
3		0.16	25.80	9.79	35.59	-19.87	55.46	Average
4		0.16	41.40	9.79	51.19	-14.27	65.46	QP
5		0.17	26.00	9.80	35.80	-19.16	54.96	Average
6		0.17	41.70	9.80	51.50	-13.46	64.96	QP
7		0.19	21.80	9.80	31.60	-22.44	54.04	Average
8		0.19	36.80	9.80	46.60	-17.44	64.04	QP
9		0.21	21.10	9.80	30.90	-22.31	53.21	Average
10		0.21	35.40	9.80	45.20	-18.01	63.21	QP
11		0.42	22.30	9.87	32.17	-15.28	47.45	Average
12		0.42	28.00	9.87	37.87	-19.58	57.45	QP

Notes:

1. " * " indicates the worst-case emission level observed during the measurement.
2. C.F (dB) = LISN Factor (dB) + Cable Loss (dB).
3. Measurement (dBμV) = Reading (dBμV) + C.F (dB).

Appendix B - Test Setup Photograph

Refer to "R25S1044103-UT" file.

Appendix C - EUT Photograph

Refer to "R25S1044103-UE" file.

_____ The End _____