

Product	ACCESS POINT	Test Engineer	Mero Zhou
Test Site	SIP-AC3	Test Date	2025-06-24
Test Mode	802.11be-EHT80	Test Channel	7
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	8422.20	47.86	-1.20	46.66	74.00	-27.34	Peak	Horizontal
	12526.00	46.44	1.40	47.84	74.00	-26.16	Peak	Horizontal
*	14368.80	45.55	5.20	50.75	88.20	-37.45	Peak	Horizontal
*	16925.60	43.68	10.23	53.91	88.20	-34.29	Peak	Horizontal
	8221.60	48.47	-1.53	46.94	74.00	-27.06	Peak	Vertical
	12420.60	47.39	1.34	48.73	74.00	-25.27	Peak	Vertical
*	14727.50	44.05	6.58	50.62	88.20	-37.58	Peak	Vertical
*	16935.80	43.82	10.19	54.01	88.20	-34.19	Peak	Vertical
Note 1: “*” is not in restricted band.us emissions. Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m) Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)								

Product	ACCESS POINT	Test Engineer	Mero Zhou
Test Site	SIP-AC3	Test Date	2025-06-24
Test Mode	802.11be-EHT80	Test Channel	55
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	8386.50	48.40	-1.45	46.95	74.00	-27.05	Peak	Horizontal
	12444.40	47.04	1.40	48.43	74.00	-25.57	Peak	Horizontal
*	14350.10	45.70	4.96	50.66	88.20	-37.54	Peak	Horizontal
*	16932.40	43.38	10.30	53.68	88.20	-34.52	Peak	Horizontal
	8281.10	47.86	-1.57	46.29	74.00	-27.71	Peak	Vertical
	12434.20	47.27	1.39	48.66	74.00	-25.34	Peak	Vertical
*	14334.80	45.88	4.78	50.67	88.20	-37.53	Peak	Vertical
*	17022.50	45.12	9.61	54.73	88.20	-33.47	Peak	Vertical
Note 1: “*” is not in restricted band.us emissions. Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m) Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)								

Product	ACCESS POINT	Test Engineer	Mero Zhou
Test Site	SIP-AC3	Test Date	2025-06-24
Test Mode	802.11be-EHT80	Test Channel	87
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	8367.80	48.23	-1.39	46.84	74.00	-27.16	Peak	Horizontal
	12388.30	48.10	1.15	49.25	74.00	-24.75	Peak	Horizontal
*	15096.40	45.75	5.60	51.35	88.20	-36.85	Peak	Horizontal
*	17029.30	44.21	9.89	54.10	88.20	-34.10	Peak	Horizontal
	8301.50	49.26	-1.48	47.78	74.00	-26.22	Peak	Vertical
	12315.20	47.64	0.63	48.26	74.00	-25.74	Peak	Vertical
*	14764.90	44.37	6.27	50.64	88.20	-37.56	Peak	Vertical
*	17053.10	44.24	10.29	54.53	88.20	-33.67	Peak	Vertical
Note 1: “*” is not in restricted band.us emissions. Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m) Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)								

Product	ACCESS POINT	Test Engineer	Mero Zhou
Test Site	SIP-AC3	Test Date	2025-06-24
Test Mode	802.11be-EHT80	Test Channel	135
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	7669.10	48.19	-2.08	46.11	74.00	-27.89	Peak	Horizontal
	12271.00	47.54	0.80	48.34	74.00	-25.66	Peak	Horizontal
*	15055.60	44.26	6.14	50.41	88.20	-37.79	Peak	Horizontal
*	17289.40	44.76	9.04	53.80	88.20	-34.40	Peak	Horizontal
	8440.90	47.69	-1.13	46.56	74.00	-27.44	Peak	Vertical
	12435.90	47.45	1.39	48.84	74.00	-25.16	Peak	Vertical
*	14360.30	45.28	5.36	50.64	88.20	-37.56	Peak	Vertical
*	17032.70	44.14	10.00	54.13	88.20	-34.07	Peak	Vertical
Note 1: “*” is not in restricted band.us emissions. Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m) Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)								

Product	ACCESS POINT	Test Engineer	Mero Zhou
Test Site	SIP-AC3	Test Date	2025-06-24
Test Mode	802.11be-EHT80	Test Channel	151
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	8488.50	48.45	-1.31	47.14	74.00	-26.86	Peak	Horizontal
	12118.00	48.15	0.52	48.66	74.00	-25.34	Peak	Horizontal
*	15053.90	44.20	6.09	50.29	88.20	-37.91	Peak	Horizontal
*	16549.90	45.14	8.68	53.82	88.20	-34.38	Peak	Horizontal
	8104.30	48.27	-1.35	46.91	74.00	-27.09	Peak	Vertical
	12561.70	46.37	1.75	48.12	74.00	-25.88	Peak	Vertical
*	14447.00	45.23	5.23	50.46	88.20	-37.74	Peak	Vertical
*	16952.80	44.54	9.82	54.36	88.20	-33.84	Peak	Vertical
Note 1: “*” is not in restricted band.us emissions. Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m) Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)								

Product	ACCESS POINT	Test Engineer	Mero Zhou
Test Site	SIP-AC3	Test Date	2025-06-24
Test Mode	802.11be-EHT80	Test Channel	167
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	8141.70	48.28	-1.65	46.63	74.00	-27.37	Peak	Horizontal
	12330.50	47.93	0.68	48.62	74.00	-25.38	Peak	Horizontal
*	14363.70	45.08	5.37	50.46	88.20	-37.74	Peak	Horizontal
*	16923.90	43.31	10.14	53.45	88.20	-34.75	Peak	Horizontal
	8121.30	47.71	-1.31	46.40	74.00	-27.60	Peak	Vertical
	12342.40	47.26	0.84	48.10	74.00	-25.90	Peak	Vertical
*	15064.10	44.16	6.07	50.23	88.20	-37.97	Peak	Vertical
*	16640.00	43.95	9.69	53.64	88.20	-34.56	Peak	Vertical
Note 1: “*” is not in restricted band.us emissions. Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m) Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)								

Product	ACCESS POINT	Test Engineer	Mero Zhou
Test Site	SIP-AC3	Test Date	2025-06-24
Test Mode	802.11be-EHT160	Test Channel	15
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	8272.60	48.13	-1.55	46.58	74.00	-27.42	Peak	Horizontal
	12429.10	46.92	1.39	48.31	74.00	-25.69	Peak	Horizontal
*	14776.80	44.12	6.21	50.32	88.20	-37.88	Peak	Horizontal
*	17032.70	43.82	10.00	53.82	88.20	-34.38	Peak	Horizontal
	8117.90	47.07	-1.31	45.76	74.00	-28.24	Peak	Vertical
	12097.60	47.55	0.38	47.93	74.00	-26.07	Peak	Vertical
*	14511.60	44.20	5.99	50.19	88.20	-38.01	Peak	Vertical
*	16529.50	44.56	8.73	53.29	88.20	-34.91	Peak	Vertical
Note 1: “*” is not in restricted band.us emissions. Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m) Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)								

Product	ACCESS POINT	Test Engineer	Mero Zhou
Test Site	SIP-AC3	Test Date	2025-06-24
Test Mode	802.11be-EHT160	Test Channel	47
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	8187.60	48.10	-1.64	46.46	74.00	-27.54	Peak	Horizontal
	12543.00	45.93	1.80	47.73	74.00	-26.27	Peak	Horizontal
*	14676.50	43.71	6.38	50.09	88.20	-38.11	Peak	Horizontal
*	16946.00	44.09	9.85	53.94	88.20	-34.26	Peak	Horizontal
	8417.10	47.49	-1.25	46.25	74.00	-27.75	Peak	Vertical
	12294.80	46.92	0.65	47.57	74.00	-26.43	Peak	Vertical
*	14669.70	44.64	6.38	51.02	88.20	-37.18	Peak	Vertical
*	17046.30	43.18	10.32	53.50	88.20	-34.70	Peak	Vertical
Note 1: “*” is not in restricted band.us emissions. Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m) Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)								

Product	ACCESS POINT	Test Engineer	Mero Zhou
Test Site	SIP-AC3	Test Date	2025-06-24
Test Mode	802.11be-EHT160	Test Channel	79
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	8148.50	48.30	-1.60	46.70	74.00	-27.30	Peak	Horizontal
	12277.80	47.12	0.73	47.85	74.00	-26.15	Peak	Horizontal
*	14681.60	43.91	6.38	50.28	88.20	-37.92	Peak	Horizontal
*	16787.90	44.21	9.75	53.96	88.20	-34.24	Peak	Horizontal
	8136.60	48.53	-1.59	46.94	74.00	-27.06	Peak	Vertical
	12109.50	47.60	0.46	48.06	74.00	-25.94	Peak	Vertical
*	14662.90	44.36	6.27	50.62	88.20	-37.58	Peak	Vertical
*	17090.50	44.47	9.41	53.88	88.20	-34.32	Peak	Vertical

Note 1: “*” is not in restricted band.us emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	ACCESS POINT	Test Engineer	Mero Zhou
Test Site	SIP-AC3	Test Date	2025-06-24
Test Mode	802.11be-EHT160	Test Channel	143
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	8219.90	47.93	-1.55	46.37	74.00	-27.63	Peak	Horizontal
	12454.60	47.51	1.41	48.91	74.00	-25.09	Peak	Horizontal
*	14938.30	44.40	6.54	50.94	88.20	-37.26	Peak	Horizontal
*	16940.90	43.57	10.02	53.59	88.20	-34.61	Peak	Horizontal
	8371.20	47.81	-1.43	46.38	74.00	-27.62	Peak	Vertical
	12354.30	46.96	1.00	47.96	74.00	-26.04	Peak	Vertical
*	14613.60	44.60	5.75	50.35	88.20	-37.85	Peak	Vertical
*	17034.40	44.13	10.04	54.17	88.20	-34.03	Peak	Vertical
Note 1: “*” is not in restricted band.us emissions. Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m) Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)								

2*2 Directional:

Product	ACCESS POINT	Test Engineer	Mero Zhou
Test Site	SIP-AC3	Test Date	2025-06-24
Test Mode	802.11be-EHT20	Test Channel	1
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	8235.20	47.69	-1.44	46.26	74.00	-27.74	Peak	Horizontal
	12267.60	47.59	0.79	48.38	74.00	-25.62	Peak	Horizontal
*	14744.50	44.69	6.35	51.04	88.20	-37.16	Peak	Horizontal
*	17359.10	44.52	9.63	54.16	88.20	-34.04	Peak	Horizontal
	8304.90	47.50	-1.43	46.07	74.00	-27.93	Peak	Vertical
	12449.50	47.08	1.40	48.48	74.00	-25.52	Peak	Vertical
*	14734.30	44.47	6.67	51.14	88.20	-37.06	Peak	Vertical
*	16640.00	43.64	9.69	53.33	88.20	-34.87	Peak	Vertical

Note 1: "*" is not in restricted band.us emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	ACCESS POINT	Test Engineer	Mero Zhou
Test Site	SIP-AC3	Test Date	2025-06-24
Test Mode	802.11be-EHT20	Test Channel	49
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	8393.30	47.75	-1.41	46.34	74.00	-27.66	Peak	Horizontal
	12374.70	47.33	1.11	48.45	74.00	-25.55	Peak	Horizontal
*	14725.80	43.65	6.56	50.21	88.20	-37.99	Peak	Horizontal
*	16572.00	44.16	8.77	52.93	88.20	-35.27	Peak	Horizontal
	8269.20	48.25	-1.53	46.71	74.00	-27.29	Peak	Vertical
	12413.80	47.36	1.25	48.61	74.00	-25.39	Peak	Vertical
*	14518.40	44.89	6.03	50.92	88.20	-37.28	Peak	Vertical
*	16850.80	43.93	10.01	53.93	88.20	-34.27	Peak	Vertical
Note 1: “*” is not in restricted band.us emissions. Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m) Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)								

Product	ACCESS POINT	Test Engineer	Mero Zhou
Test Site	SIP-AC3	Test Date	2025-06-24
Test Mode	802.11be-EHT20	Test Channel	93
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	8150.20	47.78	-1.58	46.20	74.00	-27.80	Peak	Horizontal
	11477.10	48.25	-0.11	48.14	74.00	-25.86	Peak	Horizontal
*	14528.60	44.81	5.61	50.42	88.20	-37.78	Peak	Horizontal
*	16643.40	44.46	9.77	54.23	88.20	-33.97	Peak	Horizontal
	8393.30	48.35	-1.41	46.93	74.00	-27.07	Peak	Vertical
	12468.20	46.93	1.39	48.32	74.00	-25.68	Peak	Vertical
*	14951.90	44.75	6.16	50.91	88.20	-37.29	Peak	Vertical
*	17042.90	44.26	10.24	54.50	88.20	-33.70	Peak	Vertical
Note 1: “*” is not in restricted band.us emissions. Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m) Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)								

Product	ACCESS POINT	Test Engineer	Mero Zhou
Test Site	SIP-AC3	Test Date	2025-06-24
Test Mode	802.11be-EHT20	Test Channel	117
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	8318.50	48.05	-1.39	46.66	74.00	-27.34	Peak	Horizontal
	12228.50	47.75	0.70	48.44	74.00	-25.56	Peak	Horizontal
*	14360.30	45.14	5.36	50.50	88.20	-37.70	Peak	Horizontal
*	16646.80	44.04	9.84	53.88	88.20	-34.32	Peak	Horizontal
	8418.80	47.98	-1.23	46.75	74.00	-27.25	Peak	Vertical
	11667.50	47.49	0.06	47.55	74.00	-26.45	Peak	Vertical
*	14654.40	44.84	6.08	50.92	88.20	-37.28	Peak	Vertical
*	16827.00	44.37	9.86	54.23	88.20	-33.97	Peak	Vertical
Note 1: “*” is not in restricted band.us emissions. Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m) Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)								

Product	ACCESS POINT	Test Engineer	Mero Zhou
Test Site	SIP-AC3	Test Date	2025-06-24
Test Mode	802.11be-EHT20	Test Channel	149
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	8202.90	47.93	-1.69	46.24	74.00	-27.76	Peak	Horizontal
	12310.10	46.37	0.67	47.04	74.00	-26.96	Peak	Horizontal
*	14382.40	44.77	4.89	49.66	88.20	-38.54	Peak	Horizontal
*	17034.40	43.80	10.04	53.84	88.20	-34.36	Peak	Horizontal
	8231.80	47.21	-1.46	45.76	74.00	-28.24	Peak	Vertical
	12539.60	46.71	1.72	48.43	74.00	-25.57	Peak	Vertical
*	14761.50	44.43	6.19	50.62	88.20	-37.58	Peak	Vertical
*	16937.50	43.17	10.13	53.30	88.20	-34.90	Peak	Vertical
Note 1: “*” is not in restricted band.us emissions. Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m) Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)								

Product	ACCESS POINT	Test Engineer	Mero Zhou
Test Site	SIP-AC3	Test Date	2025-06-24
Test Mode	802.11be-EHT20	Test Channel	181
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	8133.20	47.51	-1.52	45.98	74.00	-28.02	Peak	Horizontal
	12318.60	47.58	0.60	48.18	74.00	-25.82	Peak	Horizontal
*	15213.70	44.22	6.46	50.68	88.20	-37.52	Peak	Horizontal
*	16643.40	43.85	9.77	53.62	88.20	-34.58	Peak	Horizontal
	8189.30	48.36	-1.66	46.70	74.00	-27.30	Peak	Vertical
	12306.70	47.63	0.69	48.33	74.00	-25.67	Peak	Vertical
*	15009.70	44.92	5.43	50.36	88.20	-37.84	Peak	Vertical
*	16927.30	42.92	10.32	53.24	88.20	-34.96	Peak	Vertical
Note 1: “*” is not in restricted band.us emissions. Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m) Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)								

Product	ACCESS POINT	Test Engineer	Mero Zhou
Test Site	SIP-AC3	Test Date	2025-06-24
Test Mode	802.11be-EHT40	Test Channel	3
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	8158.70	48.22	-1.52	46.70	-27.30	74.00	Peak	Horizontal
	12203.00	48.21	0.25	48.46	-25.54	74.00	Peak	Horizontal
*	14924.70	43.94	6.37	50.32	-37.88	88.20	Peak	Horizontal
*	17048.00	43.19	10.36	53.55	-34.65	88.20	Peak	Horizontal
	8456.20	48.55	-1.20	47.35	-26.65	74.00	Peak	Vertical
	12293.10	48.09	0.64	48.74	-25.26	74.00	Peak	Vertical
*	14443.60	45.54	5.22	50.77	-37.43	88.20	Peak	Vertical
*	16634.90	44.52	9.49	54.01	-34.19	88.20	Peak	Vertical
Note 1: “*” is not in restricted band.us emissions. Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m) Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)								

Product	ACCESS POINT	Test Engineer	Mero Zhou
Test Site	SIP-AC3	Test Date	2025-06-24
Test Mode	802.11be-EHT40	Test Channel	51
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	8440.90	48.09	-1.13	46.96	74.00	-27.04	Peak	Horizontal
	12340.70	47.88	0.82	48.70	74.00	-25.30	Peak	Horizontal
*	14741.10	44.08	6.49	50.56	88.20	-37.64	Peak	Horizontal
*	17044.60	43.90	10.28	54.18	88.20	-34.02	Peak	Horizontal
	8194.40	47.91	-1.68	46.24	74.00	-27.76	Peak	Vertical
	12124.80	48.20	0.49	48.70	74.00	-25.30	Peak	Vertical
*	14350.10	45.61	4.96	50.58	88.20	-37.62	Peak	Vertical
*	17039.50	44.25	10.16	54.41	88.20	-33.79	Peak	Vertical
Note 1: “*” is not in restricted band.us emissions. Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m) Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)								

Product	ACCESS POINT	Test Engineer	Mero Zhou
Test Site	SIP-AC3	Test Date	2025-06-24
Test Mode	802.11be-EHT40	Test Channel	91
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	8415.40	48.18	-1.26	46.92	74.00	-27.08	Peak	Horizontal
	12269.30	47.13	0.80	47.92	74.00	-26.08	Peak	Horizontal
*	14797.20	44.61	6.00	50.62	88.20	-37.58	Peak	Horizontal
*	16915.40	44.08	9.69	53.77	88.20	-34.43	Peak	Horizontal
	8121.30	47.84	-1.31	46.52	74.00	-27.48	Peak	Vertical
	11999.00	47.37	0.06	47.43	74.00	-26.57	Peak	Vertical
*	14365.40	45.32	5.32	50.63	88.20	-37.57	Peak	Vertical
*	17048.00	43.48	10.36	53.85	88.20	-34.35	Peak	Vertical
Note 1: “*” is not in restricted band.us emissions. Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m) Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)								

Product	ACCESS POINT	Test Engineer	Mero Zhou
Test Site	SIP-AC3	Test Date	2025-06-24
Test Mode	802.11be-EHT40	Test Channel	123
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	8383.10	47.46	-1.48	45.99	74.00	-28.01	Peak	Horizontal
	12293.10	46.99	0.64	47.63	74.00	-26.37	Peak	Horizontal
*	14946.80	43.90	6.33	50.23	88.20	-37.97	Peak	Horizontal
*	17252.00	43.93	9.69	53.61	88.20	-34.59	Peak	Horizontal
	8116.20	48.31	-1.31	46.99	74.00	-27.01	Peak	Vertical
	12237.00	46.75	0.77	47.52	74.00	-26.48	Peak	Vertical
*	14390.90	45.16	4.94	50.10	88.20	-38.10	Peak	Vertical
*	16541.40	45.60	8.64	54.24	88.20	-33.96	Peak	Vertical
Note 1: “*” is not in restricted band.us emissions. Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m) Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)								

Product	ACCESS POINT	Test Engineer	Mero Zhou
Test Site	SIP-AC3	Test Date	2025-06-24
Test Mode	802.11be-EHT40	Test Channel	147
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	8175.70	48.40	-1.52	46.88	74.00	-27.12	Peak	Horizontal
	12539.60	47.25	1.72	48.97	74.00	-25.03	Peak	Horizontal
*	14518.40	44.01	6.03	50.04	88.20	-38.16	Peak	Horizontal
*	16759.00	43.98	9.64	53.62	88.20	-34.58	Peak	Horizontal
	8116.20	47.79	-1.31	46.48	74.00	-27.52	Peak	Vertical
	12565.10	45.98	1.73	47.71	74.00	-26.29	Peak	Vertical
*	14375.60	45.30	4.98	50.28	88.20	-37.92	Peak	Vertical
*	17042.90	43.24	10.24	53.48	88.20	-34.72	Peak	Vertical
Note 1: “*” is not in restricted band.us emissions. Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m) Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)								

Product	ACCESS POINT	Test Engineer	Mero Zhou
Test Site	SIP-AC3	Test Date	2025-06-24
Test Mode	802.11be-EHT40	Test Channel	179
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	8121.30	47.51	-1.31	46.20	74.00	-27.80	Peak	Horizontal
	12441.00	46.76	1.39	48.16	74.00	-25.84	Peak	Horizontal
*	14520.10	44.62	5.96	50.58	88.20	-37.62	Peak	Horizontal
*	17056.50	43.18	10.23	53.41	88.20	-34.79	Peak	Horizontal
	8313.40	47.72	-1.38	46.34	74.00	-27.66	Peak	Vertical
	12417.20	47.22	1.30	48.51	74.00	-25.49	Peak	Vertical
*	13683.70	48.02	2.93	50.95	88.20	-37.25	Peak	Vertical
*	16548.20	45.61	8.67	54.28	88.20	-33.92	Peak	Vertical
Note 1: “*” is not in restricted band.us emissions. Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m) Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)								

Product	ACCESS POINT	Test Engineer	Mero Zhou
Test Site	SIP-AC3	Test Date	2025-06-24
Test Mode	802.11be-EHT80	Test Channel	7
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	8304.90	47.85	-1.43	46.42	74.00	-27.58	Peak	Horizontal
	12265.90	47.45	0.78	48.23	74.00	-25.77	Peak	Horizontal
*	14661.20	44.12	6.23	50.35	88.20	-37.85	Peak	Horizontal
*	16849.10	43.57	10.05	53.62	88.20	-34.58	Peak	Horizontal
	8371.20	47.51	-1.43	46.08	74.00	-27.92	Peak	Vertical
	12367.90	46.94	1.08	48.02	74.00	-25.98	Peak	Vertical
*	14520.10	44.90	5.96	50.86	88.20	-37.34	Peak	Vertical
*	16849.10	44.12	10.05	54.17	88.20	-34.03	Peak	Vertical
Note 1: “*” is not in restricted band.us emissions. Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m) Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)								

Product	ACCESS POINT	Test Engineer	Mero Zhou
Test Site	SIP-AC3	Test Date	2025-06-24
Test Mode	802.11be-EHT80	Test Channel	55
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	8410.30	47.62	-1.30	46.32	74.00	-27.68	Peak	Horizontal
	12459.70	47.16	1.41	48.57	74.00	-25.43	Peak	Horizontal
*	14358.60	44.83	5.30	50.12	88.20	-38.08	Peak	Horizontal
*	16558.40	45.01	8.72	53.73	88.20	-34.47	Peak	Horizontal
	8287.90	47.52	-1.58	45.94	74.00	-28.06	Peak	Vertical
	12383.20	47.23	1.14	48.37	74.00	-25.63	Peak	Vertical
*	15217.10	44.65	6.45	51.10	88.20	-37.10	Peak	Vertical
*	16917.10	44.28	9.78	54.06	88.20	-34.14	Peak	Vertical
Note 1: “*” is not in restricted band.us emissions. Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m) Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)								

Product	ACCESS POINT	Test Engineer	Mero Zhou
Test Site	SIP-AC3	Test Date	2025-06-24
Test Mode	802.11be-EHT80	Test Channel	87
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	8405.20	47.44	-1.34	46.11	74.00	-27.89	Peak	Horizontal
	11359.80	47.33	0.02	47.35	74.00	-26.65	Peak	Horizontal
*	14375.60	45.30	4.98	50.28	88.20	-37.92	Peak	Horizontal
*	17070.10	43.34	9.84	53.17	88.20	-35.03	Peak	Horizontal
	8102.60	48.14	-1.39	46.74	74.00	-27.26	Peak	Vertical
	12104.40	48.20	0.43	48.63	74.00	-25.37	Peak	Vertical
*	14770.00	44.94	6.38	51.33	88.20	-36.87	Peak	Vertical
*	17048.00	43.21	10.36	53.57	88.20	-34.63	Peak	Vertical
Note 1: “*” is not in restricted band.us emissions. Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m) Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)								

Product	ACCESS POINT	Test Engineer	Mero Zhou
Test Site	SIP-AC3	Test Date	2025-06-24
Test Mode	802.11be-EHT80	Test Channel	135
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	8435.80	47.63	-1.14	46.50	74.00	-27.50	Peak	Horizontal
	12339.00	47.20	0.79	48.00	74.00	-26.00	Peak	Horizontal
*	14362.00	44.78	5.43	50.21	88.20	-37.99	Peak	Horizontal
*	16849.10	43.66	10.05	53.70	88.20	-34.50	Peak	Horizontal
	8121.30	47.48	-1.31	46.16	74.00	-27.84	Peak	Vertical
	12339.00	47.20	0.79	48.00	74.00	-26.00	Peak	Vertical
*	14362.00	44.78	5.43	50.21	88.20	-37.99	Peak	Vertical
*	16849.10	43.66	10.05	53.70	88.20	-34.50	Peak	Vertical
Note 1: “*” is not in restricted band.us emissions. Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m) Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)								

Product	ACCESS POINT	Test Engineer	Mero Zhou
Test Site	SIP-AC3	Test Date	2025-06-24
Test Mode	802.11be-EHT80	Test Channel	151
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	8376.30	47.26	-1.49	45.77	74.00	-28.23	Peak	Horizontal
	12434.20	46.80	1.39	48.19	74.00	-25.81	Peak	Horizontal
*	14734.30	43.44	6.67	50.11	88.20	-38.09	Peak	Horizontal
*	17032.70	44.13	10.00	54.13	88.20	-34.07	Peak	Horizontal
	8196.10	47.94	-1.68	46.26	74.00	-27.74	Peak	Vertical
	12405.30	47.45	1.16	48.61	74.00	-25.39	Peak	Vertical
*	14737.70	43.34	6.63	49.97	88.20	-38.23	Peak	Vertical
*	16857.60	43.73	9.85	53.58	88.20	-34.62	Peak	Vertical
Note 1: “*” is not in restricted band.us emissions. Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m) Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)								

Product	ACCESS POINT	Test Engineer	Mero Zhou
Test Site	SIP-AC3	Test Date	2025-06-24
Test Mode	802.11be-EHT80	Test Channel	167
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	8316.80	47.68	-1.39	46.29	74.00	-27.71	Peak	Horizontal
	12441.00	46.96	1.39	48.36	74.00	-25.64	Peak	Horizontal
*	14387.50	45.86	4.92	50.78	88.20	-37.42	Peak	Horizontal
*	17291.10	44.51	9.00	53.51	88.20	-34.69	Peak	Horizontal
	8099.20	49.31	-1.48	47.83	74.00	-26.17	Peak	Vertical
	12534.50	46.93	1.60	48.53	74.00	-25.47	Peak	Vertical
*	14758.10	44.19	6.11	50.30	88.20	-37.90	Peak	Vertical
*	16546.50	45.21	8.66	53.87	88.20	-34.33	Peak	Vertical

Note 1: "*" is not in restricted band.us emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	ACCESS POINT	Test Engineer	Mero Zhou
Test Site	SIP-AC3	Test Date	2025-06-24
Test Mode	802.11be-EHT160	Test Channel	15
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	8119.60	48.35	-1.31	47.04	74.00	-26.96	Peak	Horizontal
	12478.40	46.76	1.34	48.10	74.00	-25.90	Peak	Horizontal
*	15213.70	45.74	6.46	52.19	88.20	-36.01	Peak	Horizontal
*	16988.50	44.88	9.32	54.20	88.20	-34.00	Peak	Horizontal
	8053.30	46.96	-1.52	45.43	74.00	-28.57	Peak	Vertical
	12498.80	46.12	1.15	47.27	74.00	-26.73	Peak	Vertical
*	14734.30	44.00	6.67	50.67	88.20	-37.53	Peak	Vertical
*	17058.20	42.79	10.21	52.99	88.20	-35.21	Peak	Vertical
Note 1: “*” is not in restricted band.us emissions. Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m) Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)								

Product	ACCESS POINT	Test Engineer	Mero Zhou
Test Site	SIP-AC3	Test Date	2025-06-24
Test Mode	802.11be-EHT160	Test Channel	47
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	8223.30	47.26	-1.51	45.75	74.00	-28.25	Peak	Horizontal
	12655.20	47.29	1.26	48.54	74.00	-25.46	Peak	Horizontal
*	13802.70	46.27	3.53	49.80	88.20	-38.40	Peak	Horizontal
*	17046.30	43.44	10.32	53.76	88.20	-34.44	Peak	Horizontal
	8338.90	47.48	-1.42	46.05	74.00	-27.95	Peak	Vertical
	11659.00	48.26	0.04	48.30	74.00	-25.70	Peak	Vertical
*	14314.40	45.36	4.63	49.99	88.20	-38.21	Peak	Vertical
*	17049.70	42.77	10.34	53.10	88.20	-35.10	Peak	Vertical
Note 1: “*” is not in restricted band.us emissions. Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m) Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)								

Product	ACCESS POINT	Test Engineer	Mero Zhou
Test Site	SIP-AC3	Test Date	2025-06-24
Test Mode	802.11be-EHT160	Test Channel	79
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	8386.50	48.13	-1.45	46.68	74.00	-27.32	Peak	Horizontal
	11557.00	47.69	0.14	47.84	74.00	-26.16	Peak	Horizontal
*	15077.70	44.92	5.69	50.61	88.20	-37.59	Peak	Horizontal
*	16905.20	44.39	9.39	53.78	88.20	-34.42	Peak	Horizontal
	8413.70	47.49	-1.28	46.22	74.00	-27.78	Peak	Vertical
	12641.60	47.11	0.97	48.08	74.00	-25.92	Peak	Vertical
*	14450.40	44.85	5.09	49.93	88.20	-38.27	Peak	Vertical
*	17031.00	44.28	9.96	54.24	88.20	-33.96	Peak	Vertical
Note 1: “*” is not in restricted band.us emissions. Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m) Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)								

Product	ACCESS POINT	Test Engineer	Mero Zhou
Test Site	SIP-AC3	Test Date	2025-06-24
Test Mode	802.11be-EHT160	Test Channel	143
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	8439.20	47.04	-1.13	45.91	74.00	-28.09	Peak	Horizontal
	12622.90	47.03	0.97	48.00	74.00	-26.00	Peak	Horizontal
*	14287.20	45.07	4.50	49.57	88.20	-38.63	Peak	Horizontal
*	16823.60	43.31	9.74	53.05	88.20	-35.15	Peak	Horizontal
	8354.20	47.54	-1.36	46.18	74.00	-27.82	Peak	Vertical
	12381.50	46.91	1.13	48.04	74.00	-25.96	Peak	Vertical
*	14725.80	43.45	6.56	50.01	88.20	-38.19	Peak	Vertical
*	17041.20	43.90	10.20	54.11	88.20	-34.09	Peak	Vertical
Note 1: “*” is not in restricted band.us emissions. Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m) Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)								

4*4 Omni:

Product	ACCESS POINT	Test Engineer	Mero Zhou
Test Site	SIP-AC3	Test Date	2025-06-24
Test Mode	802.11be-EHT20	Test Channel	1
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	8208.00	48.60	-1.70	46.90	74.00	-27.10	Peak	Horizontal
	12483.50	47.13	1.27	48.40	74.00	-25.60	Peak	Horizontal
*	14773.40	44.83	6.29	51.13	88.20	-37.07	Peak	Horizontal
*	16927.30	44.47	10.32	54.79	88.20	-33.41	Peak	Horizontal
	8104.30	47.96	-1.35	46.60	74.00	-27.40	Peak	Vertical
	12447.80	46.93	1.40	48.33	74.00	-25.67	Peak	Vertical
*	14980.80	44.92	5.32	50.25	88.20	-37.95	Peak	Vertical
*	16935.80	44.09	10.19	54.27	88.20	-33.93	Peak	Vertical

Note 1: "*" is not in restricted band.us emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	ACCESS POINT	Test Engineer	Mero Zhou
Test Site	SIP-AC3	Test Date	2025-06-24
Test Mode	802.11be-EHT20	Test Channel	49
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	8175.70	48.47	-1.52	46.95	74.00	-27.05	Peak	Horizontal
	12383.20	47.39	1.14	48.52	74.00	-25.48	Peak	Horizontal
*	14722.40	44.52	6.51	51.03	88.20	-37.17	Peak	Horizontal
*	16930.70	43.85	10.36	54.20	88.20	-34.00	Peak	Horizontal
	8214.80	48.64	-1.61	47.03	74.00	-26.97	Peak	Vertical
	12476.70	47.95	1.36	49.31	74.00	-24.69	Peak	Vertical
*	13697.30	47.88	3.15	51.03	88.20	-37.17	Peak	Vertical
*	16929.00	43.91	10.41	54.32	88.20	-33.88	Peak	Vertical
Note 1: “*” is not in restricted band.us emissions. Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m) Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)								

Product	ACCESS POINT	Test Engineer	Mero Zhou
Test Site	SIP-AC3	Test Date	2025-06-24
Test Mode	802.11be-EHT20	Test Channel	93
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	8422.20	47.60	-1.20	46.40	74.00	-27.60	Peak	Horizontal
	12424.00	47.37	1.38	48.76	74.00	-25.24	Peak	Horizontal
*	14739.40	44.10	6.56	50.65	88.20	-37.55	Peak	Horizontal
*	16922.20	43.56	10.05	53.61	88.20	-34.59	Peak	Horizontal
	8056.70	48.33	-1.55	46.78	74.00	-27.22	Peak	Vertical
	12374.70	46.88	1.11	47.99	74.00	-26.01	Peak	Vertical
*	14521.80	45.45	5.89	51.34	88.20	-36.86	Peak	Vertical
*	17032.70	43.54	10.00	53.53	88.20	-34.67	Peak	Vertical
Note 1: “*” is not in restricted band.us emissions. Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m) Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)								

Product	ACCESS POINT	Test Engineer	Mero Zhou
Test Site	SIP-AC3	Test Date	2025-06-24
Test Mode	802.11be-EHT20	Test Channel	117
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	8248.80	47.99	-1.44	46.56	74.00	-27.44	Peak	Horizontal
	12417.20	46.97	1.30	48.26	74.00	-25.74	Peak	Horizontal
*	14732.60	43.96	6.65	50.61	88.20	-37.59	Peak	Horizontal
*	17034.40	43.85	10.04	53.89	88.20	-34.31	Peak	Horizontal
	8172.30	48.45	-1.50	46.94	74.00	-27.06	Peak	Vertical
	12537.90	46.80	1.68	48.48	74.00	-25.52	Peak	Vertical
*	14370.50	45.11	5.15	50.26	88.20	-37.94	Peak	Vertical
*	16946.00	43.95	9.85	53.79	88.20	-34.41	Peak	Vertical
Note 1: “*” is not in restricted band.us emissions. Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m) Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)								

Product	ACCESS POINT	Test Engineer	Mero Zhou
Test Site	SIP-AC3	Test Date	2025-06-24
Test Mode	802.11be-EHT20	Test Channel	149
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	8172.30	48.45	-1.50	46.94	74.00	-27.06	Peak	Horizontal
	12537.90	46.80	1.68	48.48	74.00	-25.52	Peak	Horizontal
*	14943.40	44.14	6.44	50.59	88.20	-37.61	Peak	Horizontal
*	16946.00	43.95	9.85	53.79	88.20	-34.41	Peak	Horizontal
	8121.30	47.91	-1.31	46.60	74.00	-27.40	Peak	Vertical
	12390.00	47.11	1.15	48.26	74.00	-25.74	Peak	Vertical
*	14941.70	44.65	6.50	51.15	88.20	-37.05	Peak	Vertical
*	17236.70	44.77	9.51	54.29	88.20	-33.91	Peak	Vertical
Note 1: “*” is not in restricted band.us emissions. Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m) Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)								

Product	ACCESS POINT	Test Engineer	Mero Zhou
Test Site	SIP-AC3	Test Date	2025-06-24
Test Mode	802.11be-EHT20	Test Channel	181
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	8116.20	47.44	-1.31	46.13	74.00	-27.87	Peak	Horizontal
	12407.00	47.36	1.16	48.52	74.00	-25.48	Peak	Horizontal
*	13712.60	48.78	3.15	51.94	88.20	-36.26	Peak	Horizontal
*	16927.30	43.96	10.32	54.28	88.20	-33.92	Peak	Horizontal
	8355.90	48.00	-1.35	46.65	74.00	-27.35	Peak	Vertical
	12308.40	47.65	0.68	48.33	74.00	-25.67	Peak	Vertical
*	13704.10	52.71	3.17	55.88	88.20	-32.32	Peak	Vertical
*	16663.80	44.14	9.73	53.87	88.20	-34.33	Peak	Vertical
Note 1: “*” is not in restricted band.us emissions. Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m) Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)								

Product	ACCESS POINT	Test Engineer	Mero Zhou
Test Site	SIP-AC3	Test Date	2025-06-24
Test Mode	802.11be-EHT40	Test Channel	3
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	8112.80	47.96	-1.31	46.64	74.00	-27.36	Peak	Horizontal
	12452.90	46.91	1.41	48.32	74.00	-25.68	Peak	Horizontal
*	14356.90	44.38	5.23	49.61	88.20	-38.59	Peak	Horizontal
*	16563.50	45.33	8.74	54.07	88.20	-34.13	Peak	Horizontal
	8233.50	48.81	-1.45	47.36	74.00	-26.64	Peak	Vertical
	12243.80	47.26	0.76	48.02	74.00	-25.98	Peak	Vertical
*	14768.30	43.80	6.34	50.15	88.20	-38.05	Peak	Vertical
*	16927.30	44.48	10.32	54.80	88.20	-33.40	Peak	Vertical
Note 1: “*” is not in restricted band.us emissions. Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m) Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)								

Product	ACCESS POINT	Test Engineer	Mero Zhou
Test Site	SIP-AC3	Test Date	2025-06-24
Test Mode	802.11be-EHT40	Test Channel	51
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	8393.30	47.99	-1.41	46.58	74.00	-27.42	Peak	Horizontal
	12075.50	48.08	0.13	48.21	74.00	-25.79	Peak	Horizontal
*	14671.40	43.81	6.38	50.19	88.20	-38.01	Peak	Horizontal
*	16820.20	43.83	9.61	53.44	88.20	-34.76	Peak	Horizontal
	8304.90	48.40	-1.43	46.97	74.00	-27.03	Peak	Vertical
	12373.00	47.03	1.11	48.14	74.00	-25.86	Peak	Vertical
*	14603.40	44.72	5.73	50.45	88.20	-37.75	Peak	Vertical
*	17236.70	43.79	9.51	53.30	88.20	-34.90	Peak	Vertical
Note 1: “*” is not in restricted band.us emissions. Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m) Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)								

Product	ACCESS POINT	Test Engineer	Mero Zhou
Test Site	SIP-AC3	Test Date	2025-06-24
Test Mode	802.11be-EHT40	Test Channel	91
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	8367.80	47.90	-1.39	46.51	74.00	-27.49	Peak	Horizontal
	12420.60	46.86	1.34	48.20	74.00	-25.80	Peak	Horizontal
*	15048.80	44.42	5.95	50.38	88.20	-37.82	Peak	Horizontal
*	16944.30	44.21	9.90	54.11	88.20	-34.09	Peak	Horizontal
	8129.80	48.38	-1.45	46.93	74.00	-27.07	Peak	Vertical
	12480.10	47.18	1.32	48.49	74.00	-25.51	Peak	Vertical
*	14377.30	45.52	4.92	50.44	88.20	-37.76	Peak	Vertical
*	17039.50	43.45	10.16	53.61	88.20	-34.59	Peak	Vertical
Note 1: “*” is not in restricted band.us emissions. Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m) Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)								

Product	ACCESS POINT	Test Engineer	Mero Zhou
Test Site	SIP-AC3	Test Date	2025-06-24
Test Mode	802.11be-EHT40	Test Channel	123
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	8100.90	47.27	-1.44	45.83	74.00	-28.17	Peak	Horizontal
	12639.90	46.77	0.97	47.73	74.00	-26.27	Peak	Horizontal
*	14351.80	46.09	5.03	51.13	88.20	-37.07	Peak	Horizontal
*	16641.70	43.95	9.73	53.68	88.20	-34.52	Peak	Horizontal
	8386.50	48.05	-1.45	46.59	74.00	-27.41	Peak	Vertical
	12463.10	47.54	1.40	48.94	74.00	-25.06	Peak	Vertical
*	14355.20	45.13	5.16	50.29	88.20	-37.91	Peak	Vertical
*	17056.50	43.77	10.23	54.00	88.20	-34.20	Peak	Vertical
Note 1: “*” is not in restricted band.us emissions. Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m) Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)								

Product	ACCESS POINT	Test Engineer	Mero Zhou
Test Site	SIP-AC3	Test Date	2025-06-24
Test Mode	802.11be-EHT40	Test Channel	147
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	8107.70	47.47	-1.31	46.16	74.00	-27.84	Peak	Horizontal
	12313.50	47.52	0.64	48.17	74.00	-25.83	Peak	Horizontal
*	14730.90	44.02	6.63	50.65	88.20	-37.55	Peak	Horizontal
*	16918.80	44.40	9.87	54.27	88.20	-33.93	Peak	Horizontal
	8408.60	47.64	-1.31	46.32	74.00	-27.68	Peak	Vertical
	12109.50	47.87	0.46	48.33	74.00	-25.67	Peak	Vertical
*	14436.80	45.23	5.21	50.44	88.20	-37.76	Peak	Vertical
*	16927.30	43.83	10.32	54.16	88.20	-34.04	Peak	Vertical
Note 1: “*” is not in restricted band.us emissions. Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m) Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)								

Product	ACCESS POINT	Test Engineer	Mero Zhou
Test Site	SIP-AC3	Test Date	2025-06-24
Test Mode	802.11be-EHT40	Test Channel	179
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	8136.60	48.74	-1.59	47.15	74.00	-26.85	Peak	Horizontal
	12230.20	46.98	0.71	47.69	74.00	-26.31	Peak	Horizontal
*	13692.20	48.81	3.07	51.88	88.20	-36.32	Peak	Horizontal
*	17099.00	44.00	9.59	53.59	88.20	-34.61	Peak	Horizontal
	8204.60	47.79	-1.69	46.10	74.00	-27.90	Peak	Vertical
	12415.50	46.51	1.27	47.78	74.00	-26.22	Peak	Vertical
*	13695.60	51.97	3.13	55.09	88.20	-33.11	Peak	Vertical
*	16949.40	44.12	9.83	53.95	88.20	-34.25	Peak	Vertical
Note 1: “*” is not in restricted band.us emissions. Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m) Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)								

Product	ACCESS POINT	Test Engineer	Mero Zhou
Test Site	SIP-AC3	Test Date	2025-06-24
Test Mode	802.11be-EHT80	Test Channel	7
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	8233.50	47.67	-1.45	46.22	74.00	-27.78	Peak	Horizontal
	12373.00	47.04	1.11	48.15	74.00	-25.85	Peak	Horizontal
*	14370.50	45.04	5.15	50.19	88.20	-38.01	Peak	Horizontal
*	16932.40	43.21	10.30	53.51	88.20	-34.69	Peak	Horizontal
	8112.80	48.05	-1.31	46.73	74.00	-27.27	Peak	Vertical
	12466.50	46.40	1.40	47.80	74.00	-26.20	Peak	Vertical
*	14562.60	44.91	5.46	50.37	88.20	-37.83	Peak	Vertical
*	17289.40	45.44	9.04	54.48	88.20	-33.72	Peak	Vertical
Note 1: “*” is not in restricted band.us emissions. Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m) Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)								

Product	ACCESS POINT	Test Engineer	Mero Zhou
Test Site	SIP-AC3	Test Date	2025-06-24
Test Mode	802.11be-EHT80	Test Channel	55
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	8041.40	47.80	-1.46	46.34	74.00	-27.66	Peak	Horizontal
	12548.10	46.01	1.79	47.80	74.00	-26.20	Peak	Horizontal
*	14713.90	44.02	6.41	50.43	88.20	-37.77	Peak	Horizontal
*	17262.20	44.23	9.50	53.73	88.20	-34.47	Peak	Horizontal
	8340.60	48.29	-1.42	46.87	74.00	-27.13	Peak	Vertical
	10807.30	47.96	0.18	48.14	74.00	-25.86	Peak	Vertical
*	14287.20	46.48	4.50	50.98	88.20	-37.22	Peak	Vertical
*	17229.90	44.74	9.45	54.19	88.20	-34.01	Peak	Vertical
Note 1: “*” is not in restricted band.us emissions. Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m) Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)								

Product	ACCESS POINT	Test Engineer	Mero Zhou
Test Site	SIP-AC3	Test Date	2025-06-24
Test Mode	802.11be-EHT80	Test Channel	87
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	8381.40	48.60	-1.49	47.11	74.00	-26.89	Peak	Horizontal
	12318.60	48.71	0.60	49.32	74.00	-24.68	Peak	Horizontal
*	15048.80	44.93	5.95	50.88	88.20	-37.32	Peak	Horizontal
*	16629.80	45.04	9.29	54.32	88.20	-33.88	Peak	Horizontal
	8121.30	47.72	-1.31	46.40	74.00	-27.60	Peak	Vertical
	12335.60	47.24	0.75	47.99	74.00	-26.01	Peak	Vertical
*	14518.40	44.80	6.03	50.83	88.20	-37.37	Peak	Vertical
*	17029.30	44.02	9.89	53.91	88.20	-34.29	Peak	Vertical
Note 1: “*” is not in restricted band.us emissions. Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m) Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)								

Product	ACCESS POINT	Test Engineer	Mero Zhou
Test Site	SIP-AC3	Test Date	2025-06-24
Test Mode	802.11be-EHT80	Test Channel	135
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	8260.70	48.15	-1.50	46.65	74.00	-27.35	Peak	Horizontal
	12356.00	47.19	1.03	48.22	74.00	-25.78	Peak	Horizontal
*	14443.60	45.23	5.22	50.45	88.20	-37.75	Peak	Horizontal
*	17029.30	43.63	9.89	53.52	88.20	-34.68	Peak	Horizontal
	8151.90	48.31	-1.57	46.74	74.00	-27.26	Peak	Vertical
	12390.00	47.87	1.15	49.02	74.00	-24.98	Peak	Vertical
*	14411.30	45.95	5.04	50.99	88.20	-37.21	Peak	Vertical
*	16657.00	43.70	10.06	53.75	88.20	-34.45	Peak	Vertical
Note 1: “*” is not in restricted band.us emissions. Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m) Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)								

Product	ACCESS POINT	Test Engineer	Mero Zhou
Test Site	SIP-AC3	Test Date	2025-06-24
Test Mode	802.11be-EHT80	Test Channel	151
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	8168.90	47.92	-1.51	46.41	74.00	-27.59	Peak	Horizontal
	12452.90	46.72	1.41	48.13	74.00	-25.87	Peak	Horizontal
*	14933.20	44.97	6.48	51.45	88.20	-36.75	Peak	Horizontal
*	17048.00	45.15	10.36	55.52	88.20	-32.68	Peak	Horizontal
	8381.40	48.82	-1.49	47.34	74.00	-26.66	Peak	Vertical
	12245.50	47.96	0.75	48.71	74.00	-25.29	Peak	Vertical
*	14358.60	45.27	5.30	50.56	88.20	-37.64	Peak	Vertical
*	17039.50	44.00	10.16	54.16	88.20	-34.04	Peak	Vertical
Note 1: “*” is not in restricted band.us emissions. Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m) Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)								

Product	ACCESS POINT	Test Engineer	Mero Zhou
Test Site	SIP-AC3	Test Date	2025-06-24
Test Mode	802.11be-EHT80	Test Channel	167
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	8269.20	48.12	-1.53	46.58	74.00	-27.42	Peak	Horizontal
	12298.20	47.35	0.67	48.02	74.00	-25.98	Peak	Horizontal
*	14379.00	45.64	4.87	50.51	88.20	-37.69	Peak	Horizontal
*	17034.40	44.16	10.04	54.19	88.20	-34.01	Peak	Horizontal
	8134.90	48.08	-1.56	46.52	74.00	-27.48	Peak	Vertical
	12277.80	47.56	0.73	48.29	74.00	-25.71	Peak	Vertical
*	14958.70	45.09	5.92	51.01	88.20	-37.19	Peak	Vertical
*	17039.50	43.73	10.16	53.89	88.20	-34.31	Peak	Vertical
Note 1: “*” is not in restricted band.us emissions. Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m) Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)								

Product	ACCESS POINT	Test Engineer	Mero Zhou
Test Site	SIP-AC3	Test Date	2025-06-24
Test Mode	802.11be-EHT160	Test Channel	15
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	8123.00	47.56	-1.31	46.24	74.00	-27.76	Peak	Horizontal
	12434.20	47.18	1.39	48.57	74.00	-25.43	Peak	Horizontal
*	14649.30	44.18	6.01	50.18	88.20	-38.02	Peak	Horizontal
*	16657.00	43.61	10.06	53.67	88.20	-34.53	Peak	Horizontal
	8422.20	48.40	-1.20	47.20	74.00	-26.80	Peak	Vertical
	12179.20	48.12	0.26	48.38	74.00	-25.62	Peak	Vertical
*	14460.60	45.84	4.64	50.47	88.20	-37.73	Peak	Vertical
*	16929.00	42.75	10.41	53.16	88.20	-35.04	Peak	Vertical
Note 1: “*” is not in restricted band.us emissions. Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m) Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)								

Product	ACCESS POINT	Test Engineer	Mero Zhou
Test Site	SIP-AC3	Test Date	2025-06-24
Test Mode	802.11be-EHT160	Test Channel	47
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	8248.80	47.71	-1.44	46.27	74.00	-27.73	Peak	Horizontal
	12276.10	47.02	0.75	47.77	74.00	-26.23	Peak	Horizontal
*	14943.40	44.33	6.44	50.77	88.20	-37.43	Peak	Horizontal
*	16837.20	43.00	10.05	53.05	88.20	-35.15	Peak	Horizontal
	8233.50	48.17	-1.45	46.72	74.00	-27.28	Peak	Vertical
	12315.20	47.83	0.63	48.46	74.00	-25.54	Peak	Vertical
*	14775.10	43.85	6.25	50.10	88.20	-38.10	Peak	Vertical
*	16883.10	44.37	9.28	53.64	88.20	-34.56	Peak	Vertical
Note 1: “*” is not in restricted band.us emissions. Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m) Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)								

Product	ACCESS POINT	Test Engineer	Mero Zhou
Test Site	SIP-AC3	Test Date	2025-06-24
Test Mode	802.11be-EHT160	Test Channel	79
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	8116.20	48.04	-1.31	46.72	74.00	-27.28	Peak	Horizontal
	12141.80	48.04	0.43	48.47	74.00	-25.53	Peak	Horizontal
*	14312.70	45.39	4.61	50.00	88.20	-38.20	Peak	Horizontal
*	16532.90	45.26	8.68	53.94	88.20	-34.26	Peak	Horizontal
	8418.80	48.02	-1.23	46.79	74.00	-27.21	Peak	Vertical
	12277.80	47.44	0.73	48.17	74.00	-25.83	Peak	Vertical
*	14676.50	44.14	6.38	50.52	88.20	-37.68	Peak	Vertical
*	16641.70	43.74	9.73	53.47	88.20	-34.73	Peak	Vertical

Note 1: “*” is not in restricted band.us emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	ACCESS POINT	Test Engineer	Mero Zhou
Test Site	SIP-AC3	Test Date	2025-06-24
Test Mode	802.11be-EHT160	Test Channel	143
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	8418.80	48.02	-1.23	46.79	74.00	-27.21	Peak	Horizontal
	12277.80	47.44	0.73	48.17	74.00	-25.83	Peak	Horizontal
*	14360.30	45.92	5.36	51.29	88.20	-36.91	Peak	Horizontal
*	17233.30	45.35	9.48	54.83	88.20	-33.37	Peak	Horizontal
	8106.00	47.80	-1.31	46.49	74.00	-27.51	Peak	Vertical
	12471.60	47.07	1.39	48.46	74.00	-25.54	Peak	Vertical
*	14535.40	45.11	5.46	50.57	88.20	-37.63	Peak	Vertical
*	17037.80	44.08	10.12	54.20	88.20	-34.00	Peak	Vertical
Note 1: “*” is not in restricted band.us emissions. Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m) Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)								

4*4 Directional:

Product	ACCESS POINT	Test Engineer	Mero Zhou
Test Site	SIP-AC3	Test Date	2025-06-24
Test Mode	802.11be-EHT20	Test Channel	1
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	8129.80	48.42	-1.45	46.97	74.00	-27.03	Peak	Horizontal
	12335.60	47.60	0.75	48.35	74.00	-25.65	Peak	Horizontal
*	14787.00	44.61	5.94	50.55	88.20	-37.65	Peak	Horizontal
*	16929.00	43.96	10.41	54.38	88.20	-33.82	Peak	Horizontal
	8367.80	48.33	-1.39	46.94	74.00	-27.06	Peak	Vertical
	12121.40	48.01	0.50	48.51	74.00	-25.49	Peak	Vertical
*	14736.00	43.47	6.70	50.16	88.20	-38.04	Peak	Vertical
*	16930.70	43.59	10.36	53.95	88.20	-34.25	Peak	Vertical

Note 1: "*" is not in restricted band.us emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	ACCESS POINT	Test Engineer	Mero Zhou
Test Site	SIP-AC3	Test Date	2025-06-24
Test Mode	802.11be-EHT20	Test Channel	49
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	8117.90	48.67	-1.31	47.36	74.00	-26.64	Peak	Horizontal
	12575.30	47.61	1.67	49.28	74.00	-24.72	Peak	Horizontal
*	14445.30	45.49	5.23	50.72	88.20	-37.48	Peak	Horizontal
*	17294.50	45.18	8.91	54.09	88.20	-34.11	Peak	Horizontal
	8452.80	48.17	-1.17	47.00	74.00	-27.00	Peak	Vertical
	12378.10	47.42	1.12	48.55	74.00	-25.45	Peak	Vertical
*	14671.40	44.42	6.38	50.80	88.20	-37.40	Peak	Vertical
*	16648.50	44.47	9.88	54.34	88.20	-33.86	Peak	Vertical
Note 1: “*” is not in restricted band.us emissions. Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m) Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)								

Product	ACCESS POINT	Test Engineer	Mero Zhou
Test Site	SIP-AC3	Test Date	2025-06-24
Test Mode	802.11be-EHT20	Test Channel	93
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	8226.70	47.96	-1.48	46.48	74.00	-27.52	Peak	Horizontal
	12393.40	46.73	1.16	47.88	74.00	-26.12	Peak	Horizontal
*	15212.00	44.70	6.46	51.16	88.20	-37.04	Peak	Horizontal
*	16925.60	43.36	10.23	53.59	88.20	-34.61	Peak	Horizontal
	8383.10	47.96	-1.48	46.48	74.00	-27.52	Peak	Vertical
	12526.00	47.17	1.40	48.57	74.00	-25.43	Peak	Vertical
*	14443.60	44.87	5.22	50.09	88.20	-38.11	Peak	Vertical
*	17046.30	43.49	10.32	53.81	88.20	-34.39	Peak	Vertical
Note 1: “*” is not in restricted band.us emissions. Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m) Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)								

Product	ACCESS POINT	Test Engineer	Mero Zhou
Test Site	SIP-AC3	Test Date	2025-06-24
Test Mode	802.11be-EHT20	Test Channel	117
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	8388.20	47.67	-1.44	46.23	74.00	-27.77	Peak	Horizontal
	12315.20	47.12	0.63	47.75	74.00	-26.25	Peak	Horizontal
*	14433.40	45.01	5.20	50.21	88.20	-37.99	Peak	Horizontal
*	17010.60	44.36	9.20	53.56	88.20	-34.64	Peak	Horizontal
	8456.20	47.67	-1.20	46.47	74.00	-27.53	Peak	Vertical
	12452.90	46.30	1.41	47.71	74.00	-26.29	Peak	Vertical
*	14736.00	43.92	6.70	50.62	88.20	-37.58	Peak	Vertical
*	16934.10	43.96	10.24	54.20	88.20	-34.00	Peak	Vertical
Note 1: “*” is not in restricted band.us emissions. Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m) Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)								

Product	ACCESS POINT	Test Engineer	Mero Zhou
Test Site	SIP-AC3	Test Date	2025-06-24
Test Mode	802.11be-EHT20	Test Channel	149
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	8100.90	47.97	-1.44	46.53	74.00	-27.47	Peak	Horizontal
	12544.70	46.29	1.80	48.09	74.00	-25.91	Peak	Horizontal
*	15212.00	44.63	6.46	51.09	88.20	-37.11	Peak	Horizontal
*	16913.70	43.71	9.60	53.31	88.20	-34.89	Peak	Horizontal
	8126.40	48.09	-1.38	46.71	74.00	-27.29	Peak	Vertical
	12432.50	46.91	1.39	48.30	74.00	-25.70	Peak	Vertical
*	13614.00	46.99	3.26	50.25	88.20	-37.95	Peak	Vertical
*	17027.60	44.69	9.82	54.50	88.20	-33.70	Peak	Vertical
Note 1: “*” is not in restricted band.us emissions. Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m) Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)								

Product	ACCESS POINT	Test Engineer	Mero Zhou
Test Site	SIP-AC3	Test Date	2025-06-24
Test Mode	802.11be-EHT20	Test Channel	181
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	8126.40	48.09	-1.38	46.71	74.00	-27.29	Peak	Horizontal
	12413.80	47.40	1.25	48.65	74.00	-25.35	Peak	Horizontal
*	14686.70	44.32	6.37	50.69	88.20	-37.51	Peak	Horizontal
*	17027.60	44.69	9.82	54.50	88.20	-33.70	Peak	Horizontal
	8097.50	48.28	-1.52	46.76	74.00	-27.24	Peak	Vertical
	12543.00	47.36	1.80	49.16	74.00	-24.84	Peak	Vertical
*	13709.20	48.04	3.16	51.20	88.20	-37.00	Peak	Vertical
*	16786.20	43.94	9.71	53.65	88.20	-34.55	Peak	Vertical
Note 1: “*” is not in restricted band.us emissions. Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m) Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)								

Product	ACCESS POINT	Test Engineer	Mero Zhou
Test Site	SIP-AC3	Test Date	2025-06-24
Test Mode	802.11be-EHT40	Test Channel	3
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	8405.20	47.53	-1.34	46.19	74.00	-27.81	Peak	Horizontal
	12269.30	47.50	0.80	48.30	74.00	-25.70	Peak	Horizontal
*	14545.60	44.96	5.44	50.40	88.20	-37.80	Peak	Horizontal
*	16660.40	44.42	9.90	54.31	88.20	-33.89	Peak	Horizontal
	8357.60	48.31	-1.34	46.97	74.00	-27.03	Peak	Vertical
	11517.90	48.34	-0.07	48.27	74.00	-25.73	Peak	Vertical
*	14433.40	45.01	5.20	50.21	88.20	-37.99	Peak	Vertical
*	16915.40	44.06	9.69	53.75	88.20	-34.45	Peak	Vertical
Note 1: “*” is not in restricted band.us emissions. Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m) Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)								

Product	ACCESS POINT	Test Engineer	Mero Zhou
Test Site	SIP-AC3	Test Date	2025-06-24
Test Mode	802.11be-EHT40	Test Channel	51
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	8432.40	47.71	-1.14	46.57	74.00	-27.43	Peak	Horizontal
	12486.90	46.81	1.23	48.04	74.00	-25.96	Peak	Horizontal
*	14685.00	44.08	6.38	50.45	88.20	-37.75	Peak	Horizontal
*	17059.90	43.50	10.18	53.67	88.20	-34.53	Peak	Horizontal
	8457.90	48.17	-1.21	46.96	74.00	-27.04	Peak	Vertical
	12514.10	46.92	1.22	48.14	74.00	-25.86	Peak	Vertical
*	14433.40	45.51	5.20	50.70	88.20	-37.50	Peak	Vertical
*	17352.30	44.83	9.75	54.59	88.20	-33.61	Peak	Vertical
Note 1: “*” is not in restricted band.us emissions. Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m) Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)								

Product	ACCESS POINT	Test Engineer	Mero Zhou
Test Site	SIP-AC3	Test Date	2025-06-24
Test Mode	802.11be-EHT40	Test Channel	91
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	8187.60	47.92	-1.64	46.28	74.00	-27.72	Peak	Horizontal
	12410.40	47.10	1.21	48.31	74.00	-25.69	Peak	Horizontal
*	14770.00	44.67	6.38	51.06	88.20	-37.14	Peak	Horizontal
*	16925.60	43.58	10.23	53.81	88.20	-34.39	Peak	Horizontal
	8442.60	47.43	-1.13	46.30	74.00	-27.70	Peak	Vertical
	12410.40	47.33	1.21	48.54	74.00	-25.46	Peak	Vertical
*	13802.70	46.18	3.53	49.71	88.20	-38.49	Peak	Vertical
*	17027.60	43.90	9.82	53.71	88.20	-34.49	Peak	Vertical
Note 1: “*” is not in restricted band.us emissions. Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m) Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)								

Product	ACCESS POINT	Test Engineer	Mero Zhou
Test Site	SIP-AC3	Test Date	2025-06-24
Test Mode	802.11be-EHT40	Test Channel	123
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	8415.40	47.38	-1.26	46.11	74.00	-27.89	Peak	Horizontal
	12410.40	47.33	1.21	48.54	74.00	-25.46	Peak	Horizontal
*	15145.70	45.32	6.00	51.32	88.20	-36.88	Peak	Horizontal
*	17012.30	45.17	9.23	54.40	88.20	-33.80	Peak	Horizontal
	8260.70	47.71	-1.50	46.21	74.00	-27.79	Peak	Vertical
	11555.30	47.99	0.14	48.14	74.00	-25.86	Peak	Vertical
*	15217.10	44.37	6.45	50.82	88.20	-37.38	Peak	Vertical
*	16577.10	45.28	8.71	53.99	88.20	-34.21	Peak	Vertical
Note 1: “*” is not in restricted band.us emissions. Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m) Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)								

Product	ACCESS POINT	Test Engineer	Mero Zhou
Test Site	SIP-AC3	Test Date	2025-06-24
Test Mode	802.11be-EHT40	Test Channel	147
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	8104.30	48.61	-1.35	47.25	74.00	-26.75	Peak	Horizontal
	12413.80	46.33	1.25	47.58	74.00	-26.42	Peak	Horizontal
*	14515.00	44.53	6.17	50.70	88.20	-37.50	Peak	Horizontal
*	16541.40	44.31	8.64	52.95	88.20	-35.25	Peak	Horizontal
	8219.90	48.42	-1.55	46.87	74.00	-27.13	Peak	Vertical
	12330.50	47.49	0.68	48.17	74.00	-25.83	Peak	Vertical
*	13775.50	47.27	3.52	50.79	88.20	-37.41	Peak	Vertical
*	16927.30	43.30	10.32	53.62	88.20	-34.58	Peak	Vertical
Note 1: “*” is not in restricted band.us emissions. Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m) Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)								

Product	ACCESS POINT	Test Engineer	Mero Zhou
Test Site	SIP-AC3	Test Date	2025-06-24
Test Mode	802.11be-EHT40	Test Channel	179
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	8065.20	48.30	-1.66	46.65	74.00	-27.35	Peak	Horizontal
	12388.30	47.48	1.15	48.62	74.00	-25.38	Peak	Horizontal
*	13680.30	49.46	2.92	52.38	88.20	-35.82	Peak	Horizontal
*	17240.10	44.18	9.55	53.73	88.20	-34.47	Peak	Horizontal
	8245.40	48.32	-1.42	46.90	74.00	-27.10	Peak	Vertical
	12143.50	47.85	0.42	48.28	74.00	-25.72	Peak	Vertical
*	13690.50	49.13	3.04	52.18	88.20	-36.02	Peak	Vertical
*	16556.70	44.88	8.71	53.59	88.20	-34.61	Peak	Vertical
Note 1: “*” is not in restricted band.us emissions. Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m) Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)								

Product	ACCESS POINT	Test Engineer	Mero Zhou
Test Site	SIP-AC3	Test Date	2025-06-24
Test Mode	802.11be-EHT80	Test Channel	7
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	8119.60	47.97	-1.31	46.66	74.00	-27.34	Peak	Horizontal
	12497.10	47.11	1.15	48.26	74.00	-25.74	Peak	Horizontal
*	14751.30	44.37	6.07	50.43	88.20	-37.77	Peak	Horizontal
*	17371.00	44.79	9.31	54.10	88.20	-34.10	Peak	Horizontal
	8129.80	48.23	-1.45	46.77	74.00	-27.23	Peak	Vertical
	12340.70	47.02	0.82	47.84	74.00	-26.16	Peak	Vertical
*	14453.80	45.67	4.94	50.61	88.20	-37.59	Peak	Vertical
*	17401.60	45.21	9.13	54.34	88.20	-33.86	Peak	Vertical
Note 1: “*” is not in restricted band.us emissions. Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m) Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)								

Product	ACCESS POINT	Test Engineer	Mero Zhou
Test Site	SIP-AC3	Test Date	2025-06-24
Test Mode	802.11be-EHT80	Test Channel	55
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	8429.00	47.89	-1.15	46.74	74.00	-27.26	Peak	Horizontal
	12519.20	47.14	1.30	48.43	74.00	-25.57	Peak	Horizontal
*	14518.40	45.29	6.03	51.32	88.20	-36.88	Peak	Horizontal
*	17265.60	44.47	9.44	53.91	88.20	-34.29	Peak	Horizontal
	8041.40	49.18	-1.46	47.72	74.00	-26.28	Peak	Vertical
	12424.00	46.93	1.38	48.32	74.00	-25.68	Peak	Vertical
*	14287.20	45.34	4.50	49.84	88.20	-38.36	Peak	Vertical
*	17044.60	43.26	10.28	53.55	88.20	-34.65	Peak	Vertical
Note 1: “*” is not in restricted band.us emissions. Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m) Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)								

Product	ACCESS POINT	Test Engineer	Mero Zhou
Test Site	SIP-AC3	Test Date	2025-06-24
Test Mode	802.11be-EHT80	Test Channel	87
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	8168.90	47.47	-1.51	45.96	74.00	-28.04	Peak	Horizontal
	12446.10	46.98	1.40	48.38	74.00	-25.62	Peak	Horizontal
*	14729.20	44.03	6.60	50.63	88.20	-37.57	Peak	Horizontal
*	17041.20	43.48	10.20	53.68	88.20	-34.52	Peak	Horizontal
	8104.30	47.99	-1.35	46.63	74.00	-27.37	Peak	Vertical
	12340.70	47.52	0.82	48.34	74.00	-25.66	Peak	Vertical
*	14404.50	45.41	5.01	50.42	88.20	-37.78	Peak	Vertical
*	17056.50	43.79	10.23	54.03	88.20	-34.17	Peak	Vertical
Note 1: “*” is not in restricted band.us emissions. Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m) Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)								

Product	ACCESS POINT	Test Engineer	Mero Zhou
Test Site	SIP-AC3	Test Date	2025-06-24
Test Mode	802.11be-EHT80	Test Channel	135
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	8049.90	48.50	-1.51	46.99	74.00	-27.01	Peak	Horizontal
	12228.50	47.36	0.70	48.06	74.00	-25.94	Peak	Horizontal
*	14373.90	45.22	5.03	50.25	88.20	-37.95	Peak	Horizontal
*	16539.70	45.23	8.63	53.86	88.20	-34.34	Peak	Horizontal
	8417.10	48.53	-1.25	47.29	74.00	-26.71	Peak	Vertical
	12315.20	47.17	0.63	47.80	74.00	-26.20	Peak	Vertical
*	14941.70	44.13	6.50	50.63	88.20	-37.57	Peak	Vertical
*	16759.00	43.73	9.64	53.37	88.20	-34.83	Peak	Vertical
Note 1: “*” is not in restricted band.us emissions. Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m) Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)								

Product	ACCESS POINT	Test Engineer	Mero Zhou
Test Site	SIP-AC3	Test Date	2025-06-24
Test Mode	802.11be-EHT80	Test Channel	151
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	8437.50	48.57	-1.13	47.44	74.00	-26.56	Peak	Horizontal
	12269.30	47.37	0.80	48.17	74.00	-25.83	Peak	Horizontal
*	14353.50	45.88	5.10	50.98	88.20	-37.22	Peak	Horizontal
*	17070.10	44.00	9.84	53.84	88.20	-34.36	Peak	Horizontal
	8100.90	47.87	-1.44	46.43	74.00	-27.57	Peak	Vertical
	12260.80	47.05	0.76	47.81	74.00	-26.19	Peak	Vertical
*	14838.00	44.29	6.03	50.33	88.20	-37.87	Peak	Vertical
*	17048.00	43.55	10.36	53.91	88.20	-34.29	Peak	Vertical
Note 1: “*” is not in restricted band.us emissions. Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m) Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)								

Product	ACCESS POINT	Test Engineer	Mero Zhou
Test Site	SIP-AC3	Test Date	2025-06-24
Test Mode	802.11be-EHT80	Test Channel	167
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	8116.20	48.04	-1.31	46.73	74.00	-27.27	Peak	Horizontal
	12514.10	46.92	1.22	48.13	74.00	-25.87	Peak	Horizontal
*	15132.10	45.11	5.84	50.96	88.20	-37.24	Peak	Horizontal
*	16844.00	43.62	10.17	53.80	88.20	-34.40	Peak	Horizontal
	8417.10	47.90	-1.25	46.66	74.00	-27.34	Peak	Vertical
	11657.30	47.86	0.02	47.88	74.00	-26.12	Peak	Vertical
*	13600.40	48.06	3.32	51.38	88.20	-36.82	Peak	Vertical
*	16539.70	45.23	8.63	53.86	88.20	-34.34	Peak	Vertical
Note 1: "*" is not in restricted band.us emissions. Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m) Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)								

Product	ACCESS POINT	Test Engineer	Mero Zhou
Test Site	SIP-AC3	Test Date	2025-06-24
Test Mode	802.11be-EHT160	Test Channel	15
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	8400.10	47.66	-1.37	46.29	74.00	-27.71	Peak	Horizontal
	12405.30	47.13	1.16	48.30	74.00	-25.70	Peak	Horizontal
*	13598.70	46.86	3.33	50.20	88.20	-38.00	Peak	Horizontal
*	16526.10	44.81	8.77	53.58	88.20	-34.62	Peak	Horizontal
	8352.50	48.86	-1.37	47.49	74.00	-26.51	Peak	Vertical
	12412.10	47.53	1.23	48.76	74.00	-25.24	Peak	Vertical
*	14732.60	43.54	6.65	50.19	88.20	-38.01	Peak	Vertical
*	17054.80	43.32	10.26	53.58	88.20	-34.62	Peak	Vertical
Note 1: “*” is not in restricted band.us emissions. Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m) Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)								

Product	ACCESS POINT	Test Engineer	Mero Zhou
Test Site	SIP-AC3	Test Date	2025-06-24
Test Mode	802.11be-EHT160	Test Channel	47
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	8138.30	49.78	-1.63	48.15	74.00	-25.85	Peak	Horizontal
	12425.70	47.00	1.38	48.39	74.00	-25.61	Peak	Horizontal
*	14727.50	44.47	6.58	51.05	88.20	-37.15	Peak	Horizontal
*	16923.90	43.41	10.14	53.56	88.20	-34.64	Peak	Horizontal
	8245.40	48.26	-1.42	46.84	74.00	-27.16	Peak	Vertical
	12420.60	47.04	1.34	48.38	74.00	-25.62	Peak	Vertical
*	14418.10	45.24	5.09	50.33	88.20	-37.87	Peak	Vertical
*	16645.10	44.01	9.80	53.81	88.20	-34.39	Peak	Vertical
Note 1: “*” is not in restricted band.us emissions. Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m) Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)								

Product	ACCESS POINT	Test Engineer	Mero Zhou
Test Site	SIP-AC3	Test Date	2025-06-24
Test Mode	802.11be-EHT160	Test Channel	79
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		


Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	8107.70	48.28	-1.31	46.96	74.00	-27.04	Peak	Horizontal
	12432.50	46.91	1.39	48.30	74.00	-25.70	Peak	Horizontal
*	14367.10	45.26	5.26	50.52	88.20	-37.68	Peak	Horizontal
*	17326.80	44.45	9.40	53.85	88.20	-34.35	Peak	Horizontal
	8116.20	47.97	-1.31	46.66	74.00	-27.34	Peak	Vertical
	12303.30	47.74	0.70	48.44	74.00	-25.56	Peak	Vertical
*	14742.80	44.03	6.42	50.45	88.20	-37.75	Peak	Vertical
*	17056.50	43.83	10.23	54.06	88.20	-34.14	Peak	Vertical
Note 1: “*” is not in restricted band.us emissions. Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m) Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)								

Product	ACCESS POINT	Test Engineer	Mero Zhou
Test Site	SIP-AC3	Test Date	2025-06-24
Test Mode	802.11be-EHT160	Test Channel	143
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	8231.80	47.97	-1.46	46.51	74.00	-27.49	Peak	Horizontal
	12434.20	47.27	1.39	48.66	74.00	-25.34	Peak	Horizontal
*	14377.30	45.51	4.92	50.43	88.20	-37.77	Peak	Horizontal
*	16929.00	43.30	10.41	53.71	88.20	-34.49	Peak	Horizontal
	8145.10	48.01	-1.62	46.39	74.00	-27.61	Peak	Vertical
	12519.20	46.77	1.30	48.06	74.00	-25.94	Peak	Vertical
*	14384.10	45.02	4.90	49.92	88.20	-38.28	Peak	Vertical
*	17042.90	43.87	10.24	54.12	88.20	-34.08	Peak	Vertical
Note 1: “*” is not in restricted band.us emissions. Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m) Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)								

The worst-case result of Radiated Emission for 9 kHz ~ 30 MHz:

Site	SIP-AC3	Test Date	2025-08-22
Temperature	22.1 °C	Humidity	65.5%
Limit	FCC_Part 15.209_RSE(3 m)	Test Engineer	Mero Zhou
Test Voltage	By PoE	Polarity	Coaxial
Test Mode	Transmit by 802.11be-EHT20 at 6535 MHz		

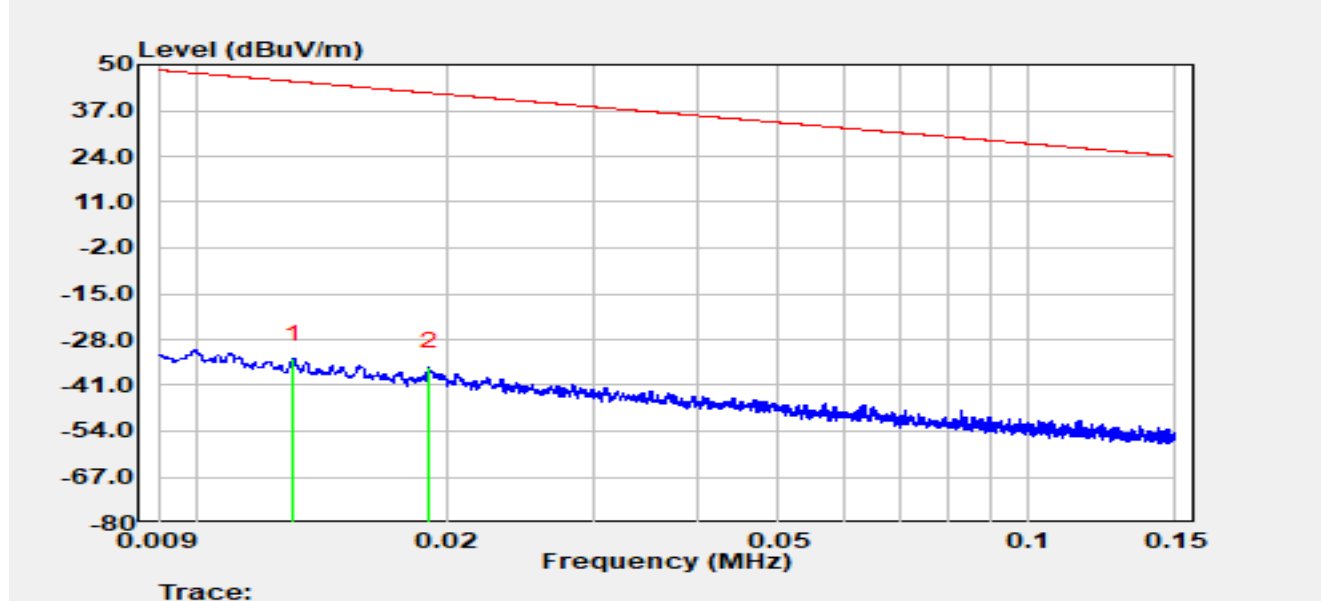


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		0.013	26.10	-59.50	-33.40	-78.66	45.26	Peak
2	*	0.019	24.26	-59.86	-35.60	-77.61	42.01	Peak

Notes:

- " * " indicates the worst-case emission level observed during the measurement.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 40log(d1/d2) (dB), d1 = 3 m, d2 = 300 m (9 kHz - 490 kHz) or 30 m (490 kHz - 30 MHz).
- Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-08-22
Temperature	22.1 °C	Humidity	65.5%
Limit	FCC_Part 15.209_RSE(3 m)	Test Engineer	Mero Zhou
Test Voltage	By PoE	Polarity	Coaxial
Test Mode	Transmit by 802.11be-EHT20 at 6535 MHz		

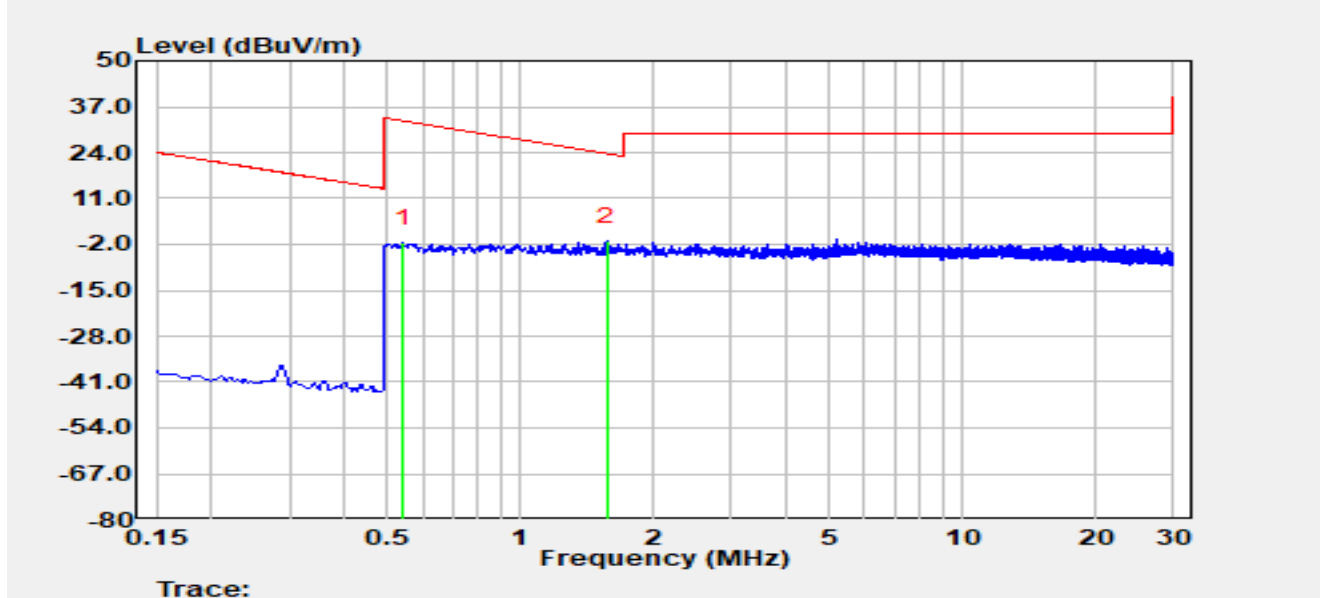


No	Mark	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Detector
1		0.544	18.68	-20.38	-1.70	-34.59	32.89	Peak
2	*	1.565	19.10	-20.30	-1.20	-24.95	23.74	Peak

Notes:

- "*" indicates the worst-case emission level observed during the measurement.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + $40\log(d1/d2)$ (dB), $d1 = 3$ m, $d2 = 300$ m (9 kHz - 490 kHz) or 30 m (490 kHz - 30 MHz).
- Measurement (dBUV/m) = Reading (dBUV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-08-22
Temperature	22.1 °C	Humidity	65.5%
Limit	FCC_Part 15.209_RSE(3 m)	Test Engineer	Mero Zhou
Test Voltage	By PoE	Polarity	Coplanar
Test Mode	Transmit by 802.11be-EHT20 at 6535 MHz		

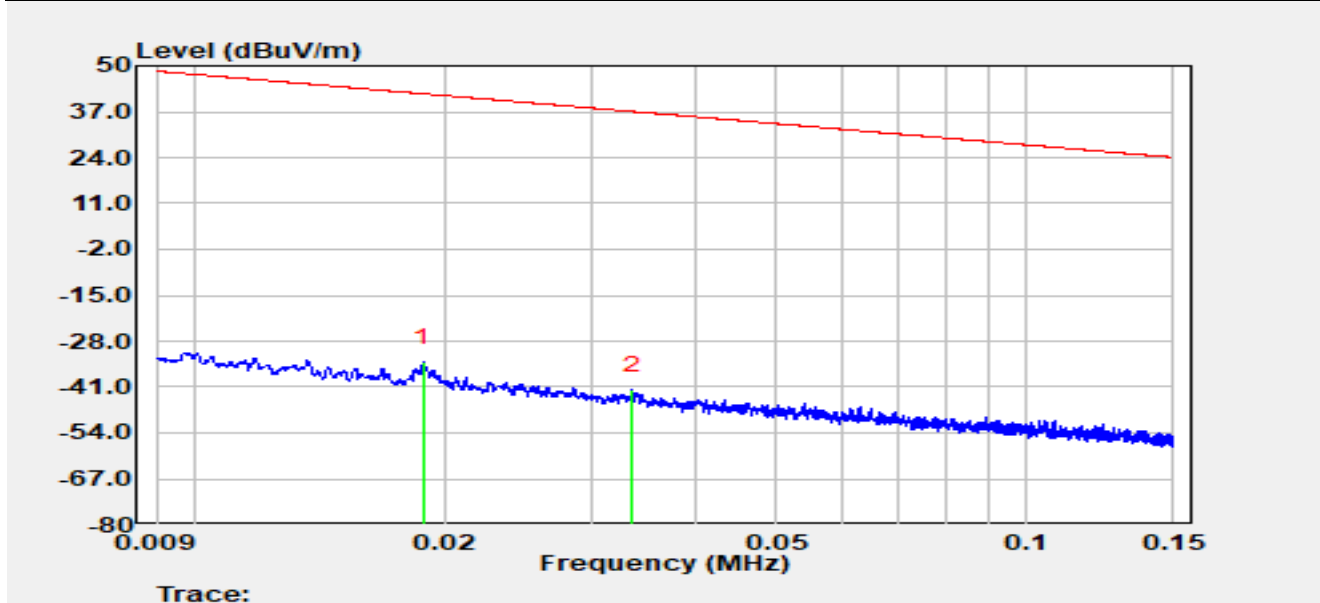


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	0.019	25.93	-59.85	-33.93	-76.01	42.09	Peak
2		0.034	18.19	-60.04	-41.85	-78.92	37.07	Peak

Notes:

- "*" indicates the worst-case emission level observed during the measurement.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + $40\log(d1/d2)$ (dB), $d1 = 3$ m, $d2 = 300$ m (9 kHz - 490 kHz) or 30 m (490 kHz - 30 MHz).
- Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-08-22
Temperature	22.1 °C	Humidity	65.5%
Limit	FCC_Part 15.209_RSE(3 m)	Test Engineer	Mero Zhou
Test Voltage	By PoE	Polarity	Coplanar
Test Mode	Transmit by 802.11be-EHT20 at 6535 MHz		

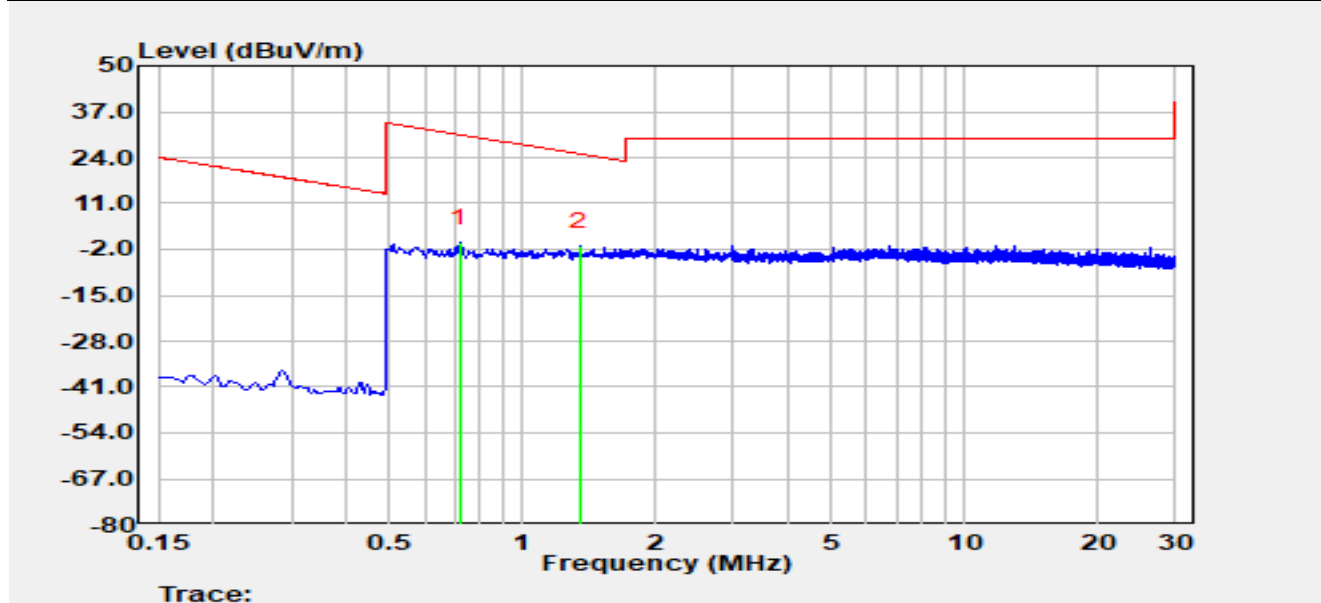


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		0.723	20.19	-20.40	-0.20	-30.63	30.43	Peak
2	*	1.350	19.28	-20.35	-1.07	-26.09	25.02	Peak

Notes:

- "*" indicates the worst-case emission level observed during the measurement.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + $40\log(d1/d2)$ (dB), $d1 = 3$ m, $d2 = 300$ m (9 kHz - 490 kHz) or 30 m (490 kHz - 30 MHz).
- Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

The worst-case result of Radiated Emission for 30 MHz ~ 1 GHz:

Site	SIP-AC3	Test Date	2025-08-22
Temperature	22.1 °C	Humidity	65.5%
Limit	FCC_Part 15.209_RSE(3 m)	Test Engineer	Mero Zhou
Factor	VULB 9168_00999	Polarity	Horizontal
EUT	ACCESS POINT	Test Voltage	By PoE
Test Mode	Transmit by 802.11be-EHT40 at 6565 MHz		

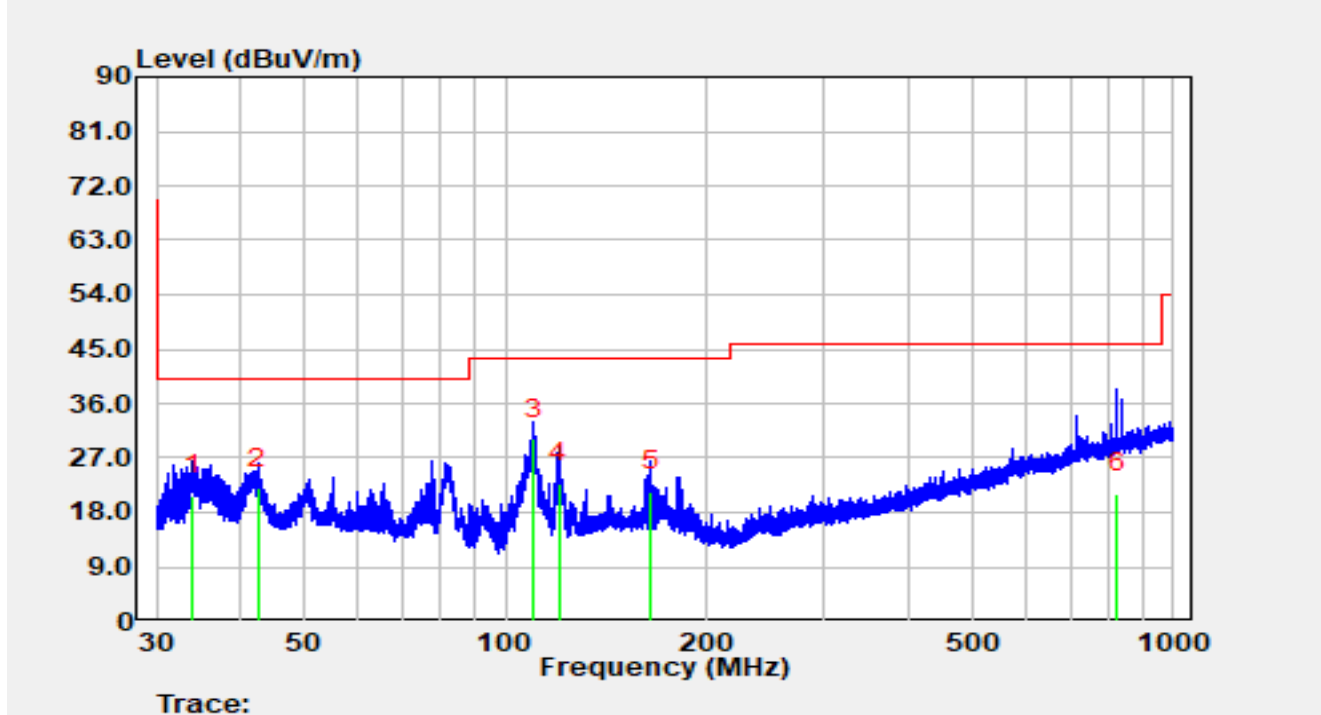


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		33.989	2.10	18.66	20.76	-19.24	40.00	QP
2		42.615	1.90	20.02	21.92	-18.08	40.00	QP
3	*	110.220	13.20	16.87	30.07	-13.43	43.50	QP
4		120.024	5.50	17.31	22.81	-20.69	43.50	QP
5		164.965	1.80	19.69	21.49	-22.01	43.50	QP
6		824.886	-9.60	30.72	21.12	-24.88	46.00	QP

Notes:

1. " * " indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-08-22
Temperature	22.1 °C	Humidity	65.5%
Limit	FCC_Part 15.209_RSE(3 m)	Test Engineer	Mero Zhou
Factor	VULB 9168_00999	Polarity	Vertical
EUT	ACCESS POINT	Test Voltage	By PoE
Test Mode	Transmit by 802.11be-EHT40 at 6565 MHz		

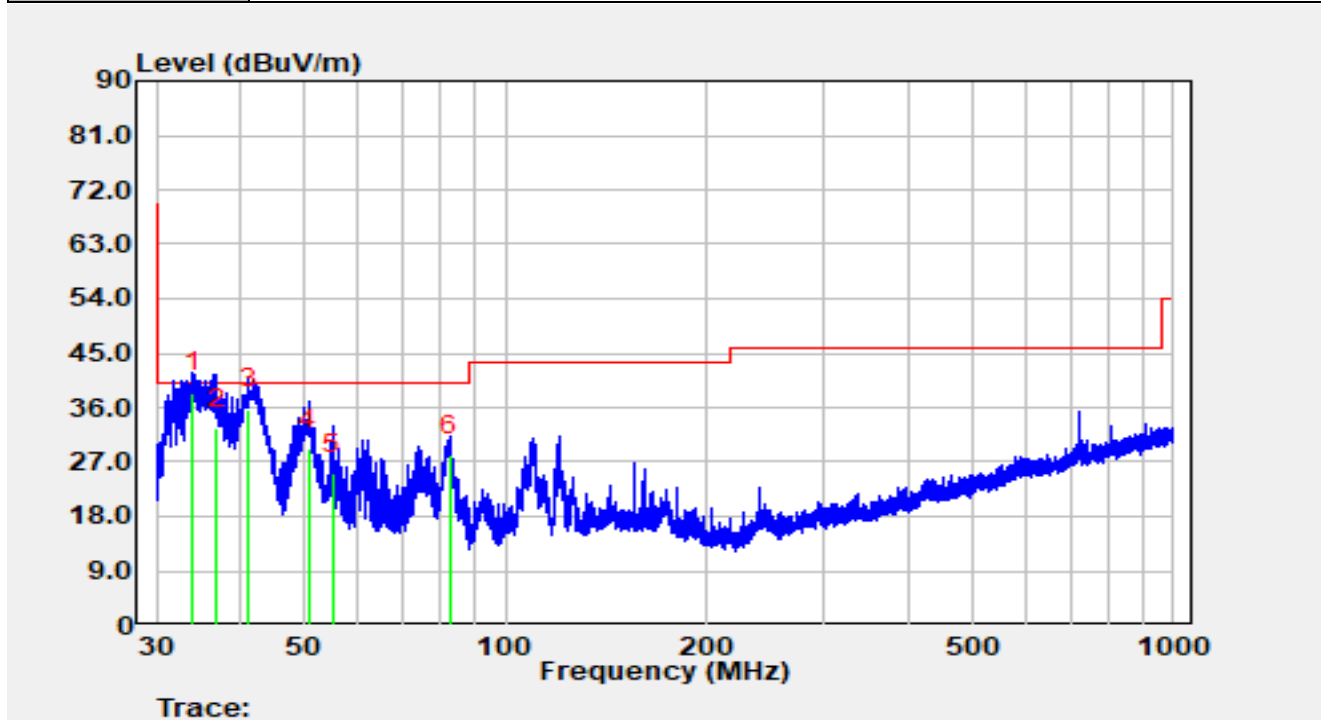


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	34.013	19.80	18.66	38.46	-1.54	40.00	QP
2		36.869	13.40	19.12	32.52	-7.48	40.00	QP
3		41.161	15.90	19.85	35.75	-4.25	40.00	QP
4		50.764	8.70	20.41	29.11	-10.89	40.00	QP
5		54.989	4.90	20.15	25.05	-14.95	40.00	QP
6		82.503	13.30	14.81	28.11	-11.89	40.00	QP

Notes:

1. " * " indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

The worst-case result of Radiated Emission for 1 GHz ~ 18 GHz:

Site	SIP-AC3	Test Date	2025-06-24
Temperature	22.1 °C	Humidity	65.5%
Limit	FCC_Part 15.407_RSE(3 m)	Test Engineer	Mero Zhou
Factor	HF907_102862	Polarity	Horizontal
EUT	ACCESS POINT	Test Voltage	By PoE
Test Mode	Transmit by 802.11be-EHT40 at 6565 MHz		

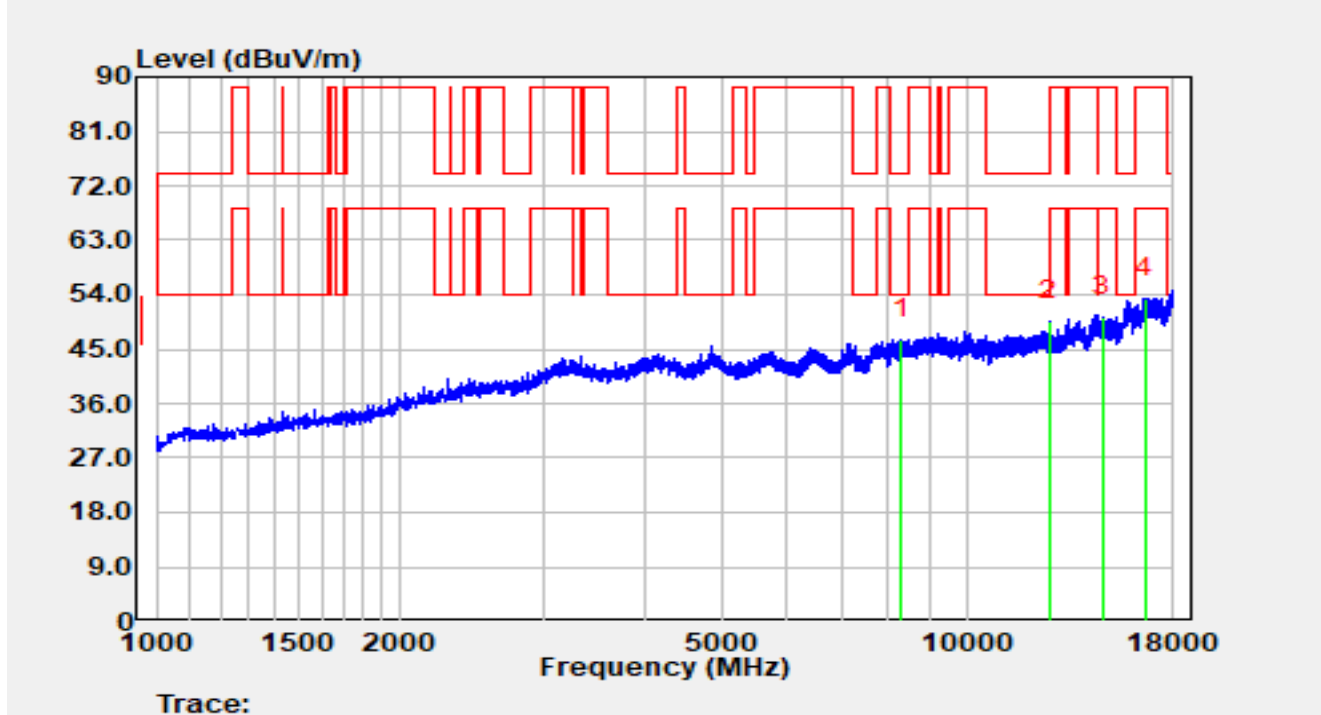


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		8306.600	48.01	-1.41	46.60	-27.40	74.00	Peak
2	*	12670.500	48.25	1.38	49.63	-24.37	74.00	Peak
3		14741.100	43.85	6.49	50.33	-37.87	88.20	Peak
4		16628.100	44.26	9.22	53.48	-34.72	88.20	Peak

Notes:

- "*", means this data is the worst emission level.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) - AMP (dB).
- Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-06-24
Temperature	22.1 °C	Humidity	65.5%
Limit	FCC_Part 15.407_RSE(3 m)	Test Engineer	Mero Zhou
Factor	HF907_102862	Polarity	Vertical
EUT	ACCESS POINT	Test Voltage	By PoE
Test Mode	Transmit by 802.11be-EHT40 at 6565 MHz		

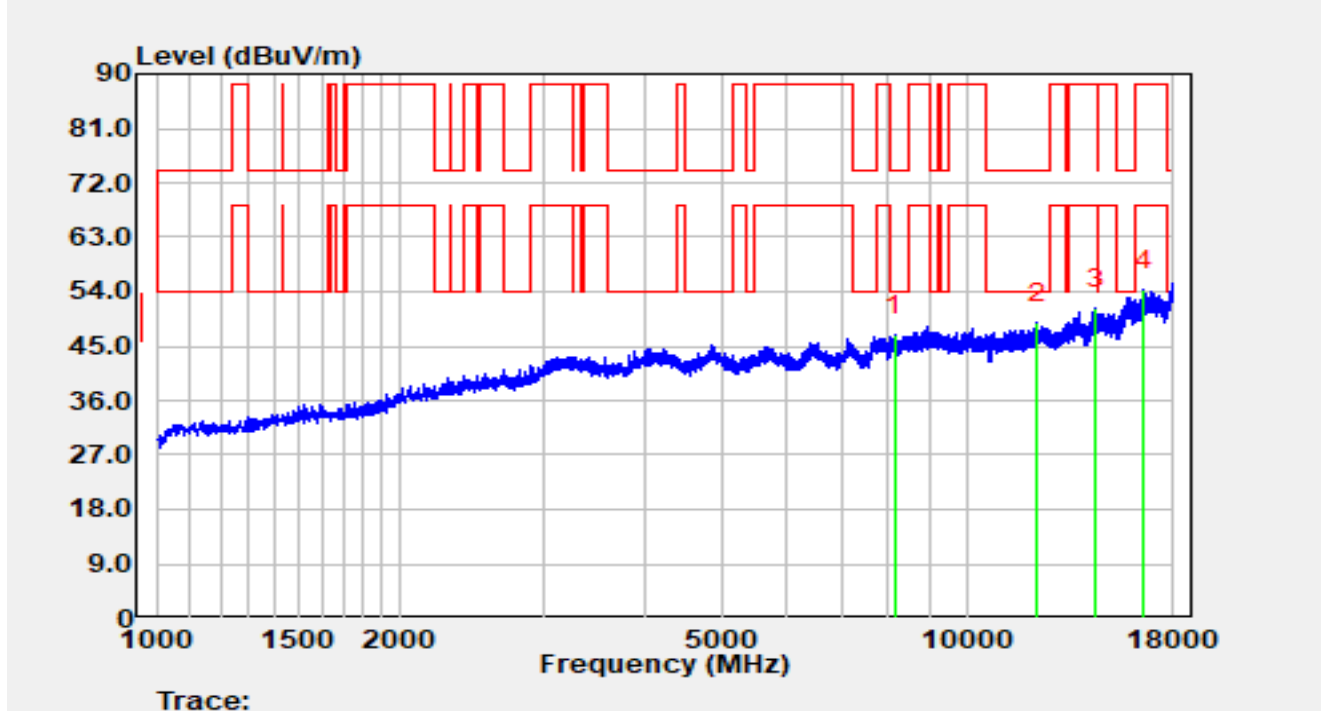


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		8136.600	48.32	-1.59	46.73	-27.27	74.00	Peak
2	*	12228.500	48.18	0.70	48.88	-25.12	74.00	Peak
3		14438.500	46.06	5.21	51.27	-36.93	88.20	Peak
4		16531.200	45.53	8.70	54.23	-33.97	88.20	Peak

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

The worst-case result of Radiated Emission for above 18 GHz:

Site	SIP-AC3	Test Date	2025-08-22
Temperature	22.1 °C	Humidity	65.5%
Limit	FCC_Part 15.407_RSE(3 m)	Test Engineer	Mero Zhou
Factor	BBHA 9170_00934	Polarity	Horizontal
EUT	ACCESS POINT	Test Voltage	By PoE
Test Mode	Transmit by 802.11be-EHT40 at 6565 MHz		

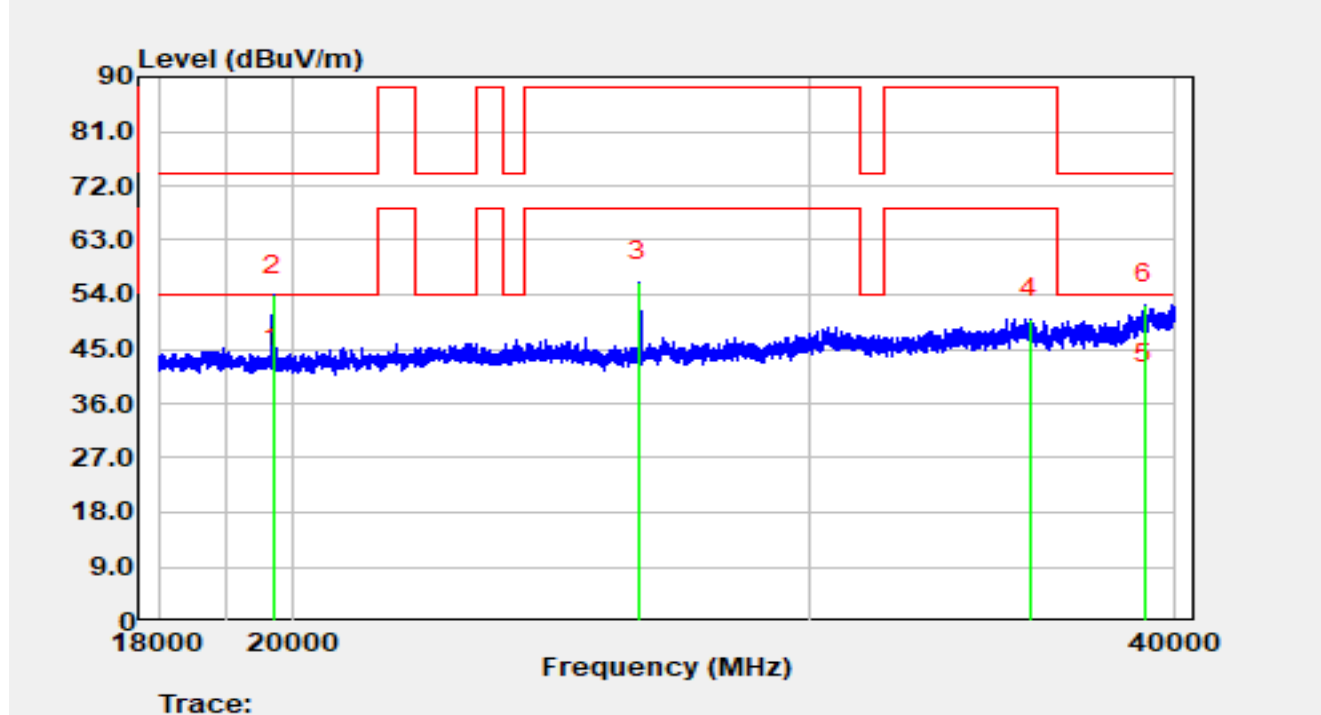


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	19698.400	53.41	-11.62	41.79	-12.21	54.00	Average
2		19698.400	65.55	-11.62	53.93	-20.07	74.00	Peak
3		26247.800	65.73	-9.57	56.16	-32.04	88.20	Peak
4		35692.400	56.24	-6.20	50.03	-38.17	88.20	Peak
5		39043.000	39.85	-0.65	39.20	-14.80	54.00	Average
6		39043.000	53.08	-0.65	52.43	-21.57	74.00	Peak

Notes:

- "*" indicates the worst-case emission level observed during the measurement.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) - AMP (dB).
- Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-08-22
Temperature	22.1 °C	Humidity	65.5%
Limit	FCC_Part 15.407_RSE(3 m)	Test Engineer	Mero Zhou
Factor	BBHA 9170_00934	Polarity	Vertical
EUT	ACCESS POINT	Test Voltage	By PoE
Test Mode	Transmit by 802.11be-EHT40 at 6565 MHz		

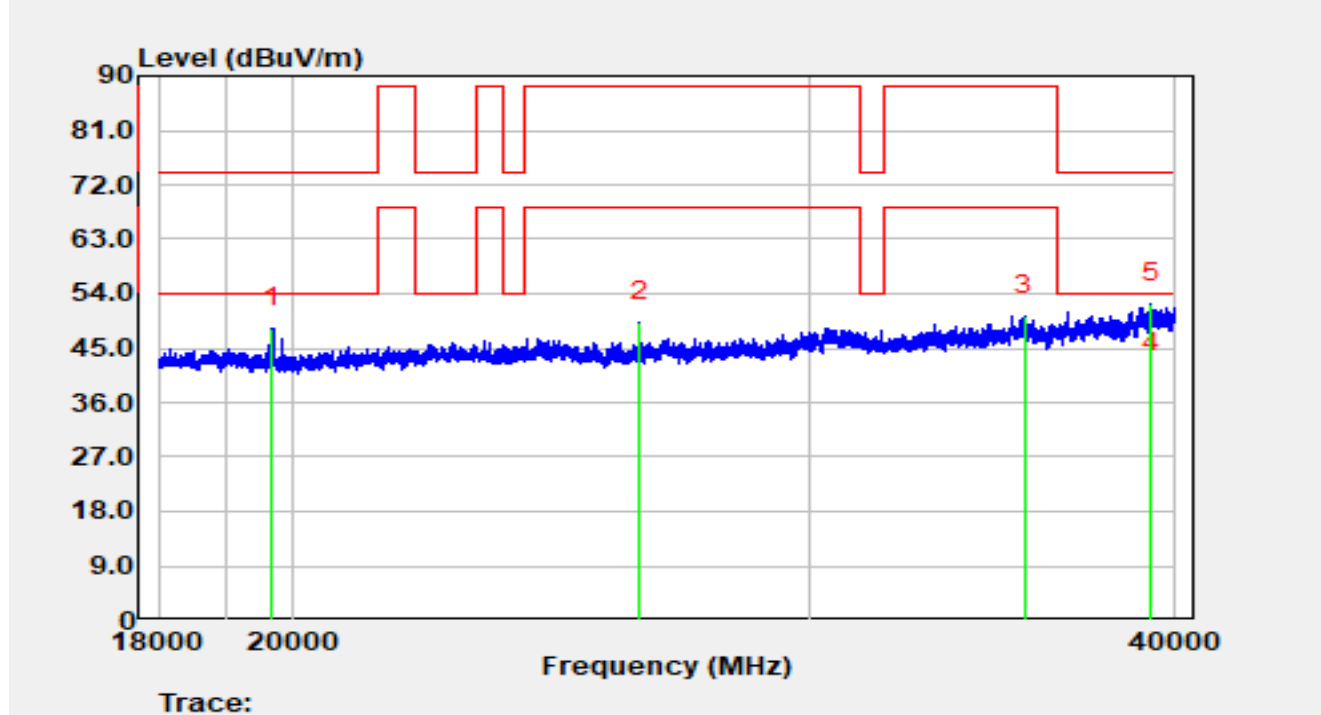

No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		19680.800	59.84	-11.58	48.26	-25.74	74.00	Peak
2		26254.400	58.82	-9.56	49.26	-38.94	88.20	Peak
3		35534.000	56.19	-5.88	50.31	-37.89	88.20	Peak
4	*	39245.400	40.15	0.79	40.94	-13.06	54.00	Average
5		39245.400	51.53	0.79	52.32	-21.68	74.00	Peak


Notes:

- "*" indicates the worst-case emission level observed during the measurement.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) - AMP (dB).
- Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

A.8 Radiated Restricted Band Edge Test Result

2*2 Omni:

Site	SIP-AC3	Test Date	2025-06-24
Temperature	23.1 °C	Humidity	65.1%
Limit	FCC_Part 15_Band Edge(3 m)_6G	Test Engineer	Mero Zhou
Factor	HF907_102862	Polarity	Horizontal
EUT	ACCESS POINT	Test Voltage	By PoE
Test Mode	Transmit by 802.11be-EHT20 at 5955 MHz		

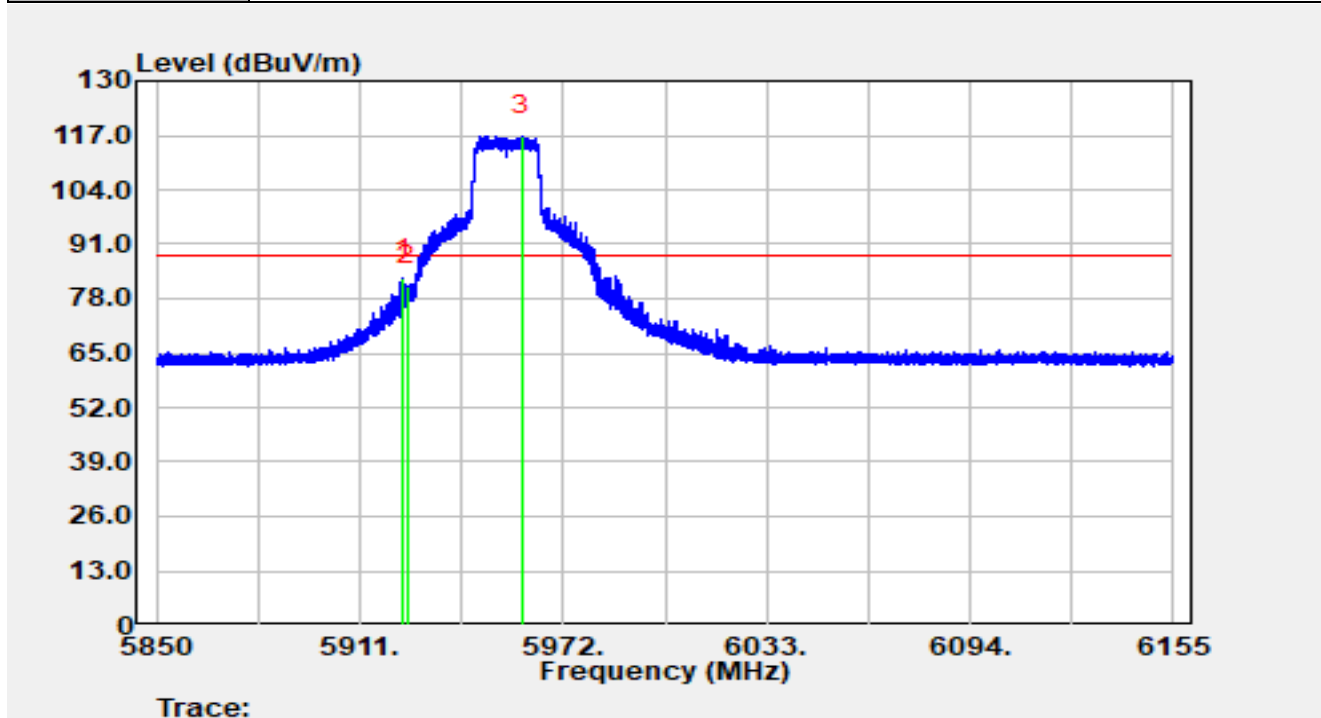


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5924.084	88.15	-5.46	82.69	-5.51	88.20	Peak
2		5925.000	86.50	-5.45	81.05	-7.15	88.20	Peak
3		5959.556	122.36	-5.41	116.95	N/A	N/A	Peak

Notes:

1. “*” means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-06-24
Temperature	23.1 °C	Humidity	65.1%
Limit	FCC_Part 15_Band Edge(3 m)_6G	Test Engineer	Mero Zhou
Factor	HF907_102862	Polarity	Horizontal
EUT	ACCESS POINT	Test Voltage	By PoE
Test Mode	Transmit by 802.11be-EHT20 at 5955 MHz		

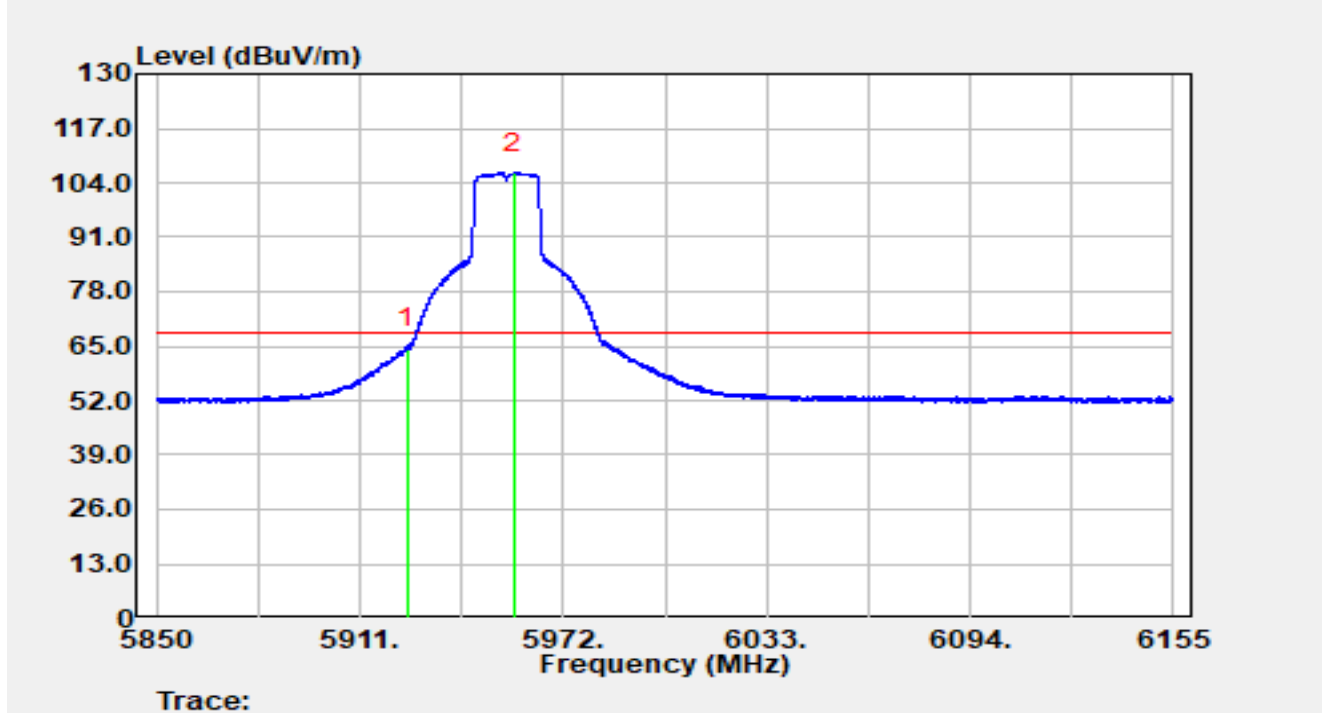


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5925.000	69.75	-5.45	64.30	-3.90	68.20	Average
2		5957.299	111.75	-5.44	106.31	N/A	N/A	Average

Notes:

1. “ * “, means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-06-24
Temperature	23.1 °C	Humidity	65.1%
Limit	FCC_Part 15_Band Edge(3 m)_6G	Test Engineer	Mero Zhou
Factor	HF907_102862	Polarity	Vertical
EUT	ACCESS POINT	Test Voltage	By PoE
Test Mode	Transmit by 802.11be-EHT20 at 5955 MHz		

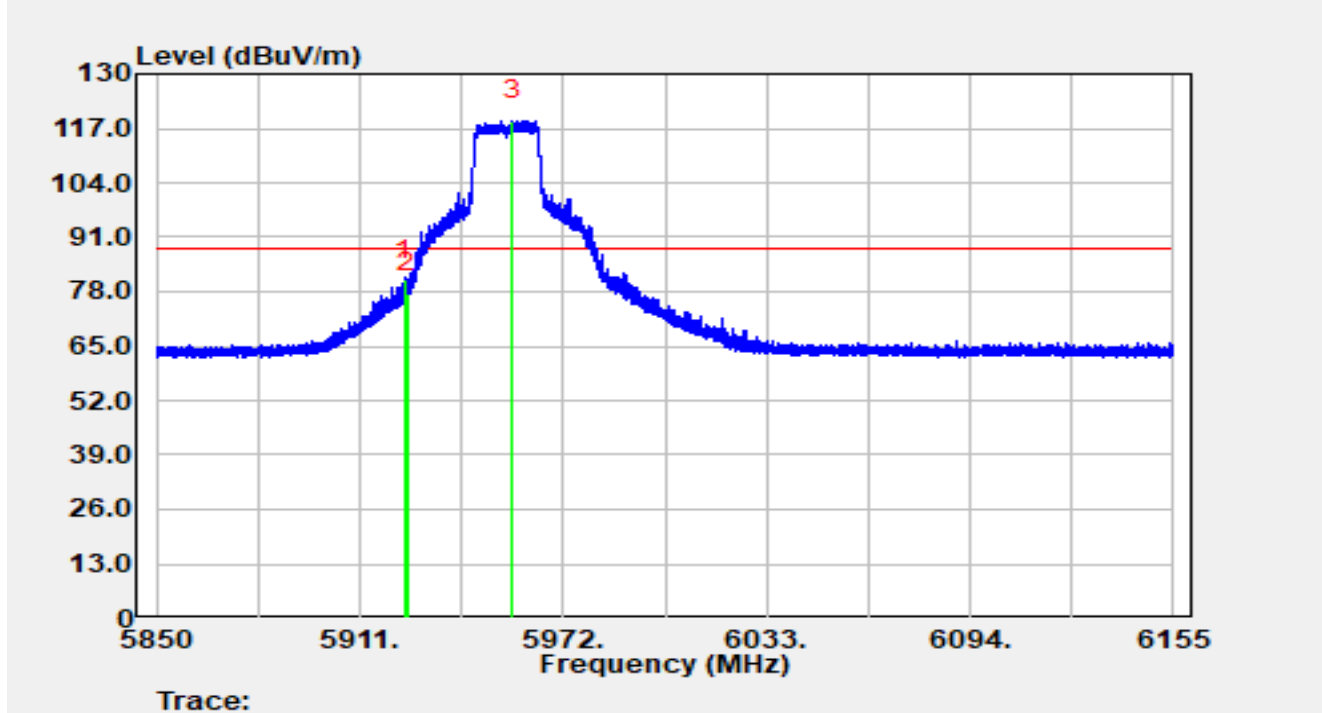


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5924.481	86.37	-5.46	80.92	-7.28	88.20	Peak
2		5925.000	83.04	-5.45	77.59	-10.61	88.20	Peak
3		5956.659	124.24	-5.44	118.80	N/A	N/A	Peak

Notes:

1. “ * “, means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-06-24
Temperature	23.1 °C	Humidity	65.1%
Limit	FCC_Part 15_Band Edge(3 m)_6G	Test Engineer	Mero Zhou
Factor	HF907_102862	Polarity	Vertical
EUT	ACCESS POINT	Test Voltage	By PoE
Test Mode	Transmit by 802.11be-EHT20 at 5955 MHz		

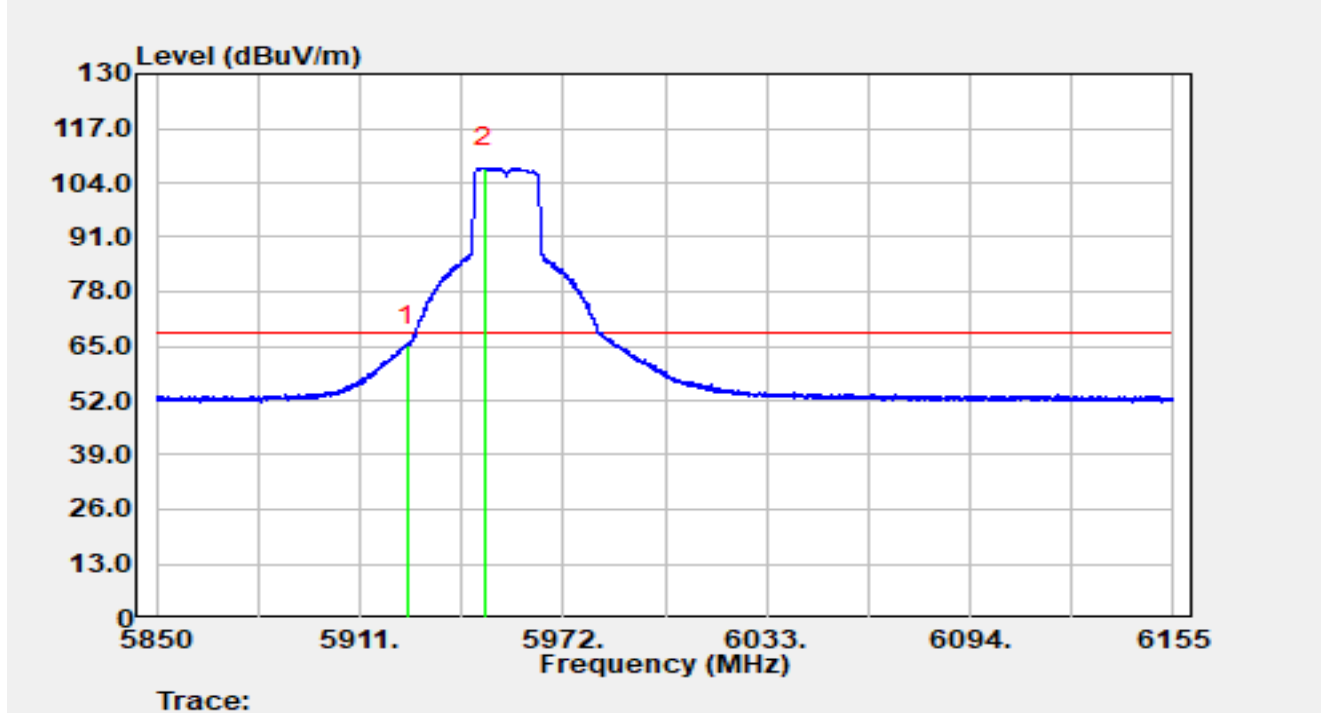


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5925.000	70.57	-5.45	65.12	-3.08	68.20	Average
2		5948.515	113.16	-5.53	107.62	N/A	N/A	Average

Notes:

1. “ * “, means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-06-24
Temperature	23.1 °C	Humidity	65.1%
Limit	FCC_Part 15_Band Edge(3 m)_6G	Test Engineer	Mero Zhou
Factor	HF907_102861	Polarity	Horizontal
EUT	ACCESS POINT	Test Voltage	By PoE
Test Mode	Transmit by 802.11be-EHT40 at 5965 MHz		

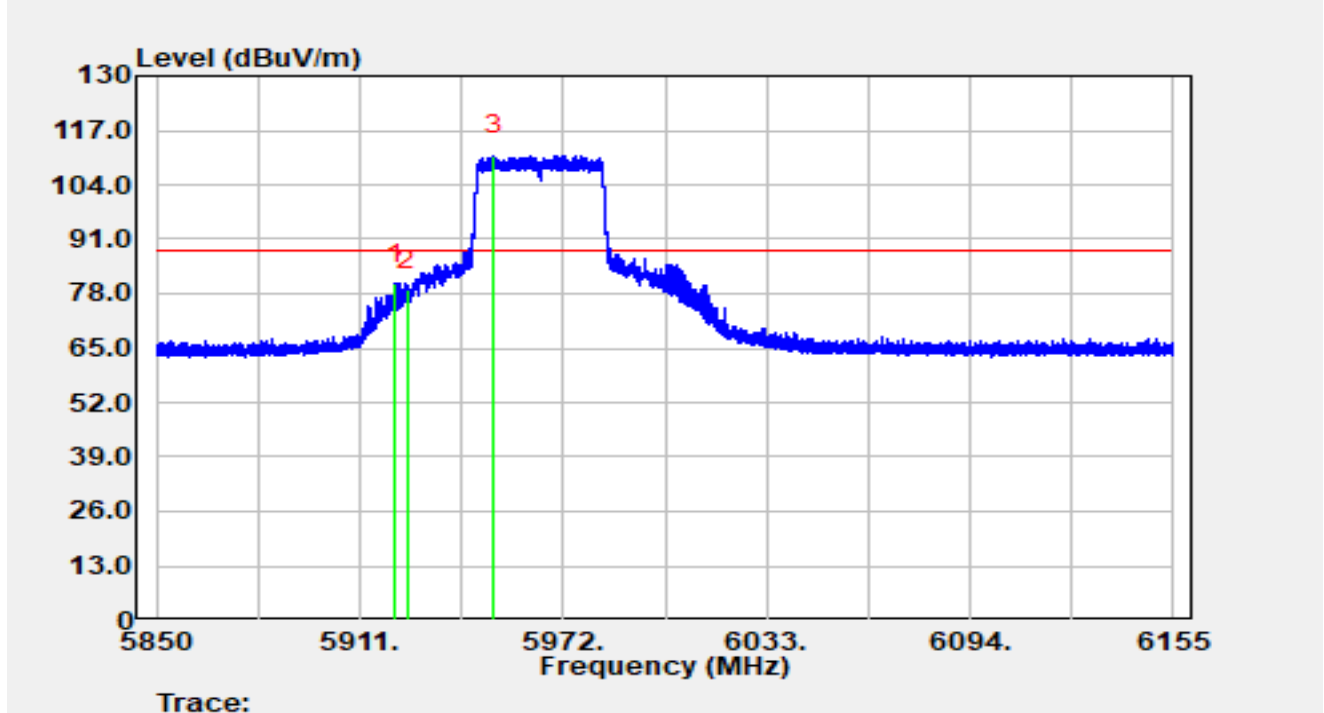


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5921.767	86.04	-5.63	80.42	-7.78	88.20	Peak
2		5925.000	84.43	-5.59	78.85	-9.35	88.20	Peak
3		5951.016	116.74	-5.65	111.08	N/A	N/A	Peak

Notes:

1. “ * “, means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-06-24
Temperature	23.1 °C	Humidity	65.1%
Limit	FCC_Part 15_Band Edge(3 m)_6G	Test Engineer	Mero Zhou
Factor	HF907_102861	Polarity	Horizontal
EUT	ACCESS POINT	Test Voltage	By PoE
Test Mode	Transmit by 802.11be-EHT40 at 5965 MHz		

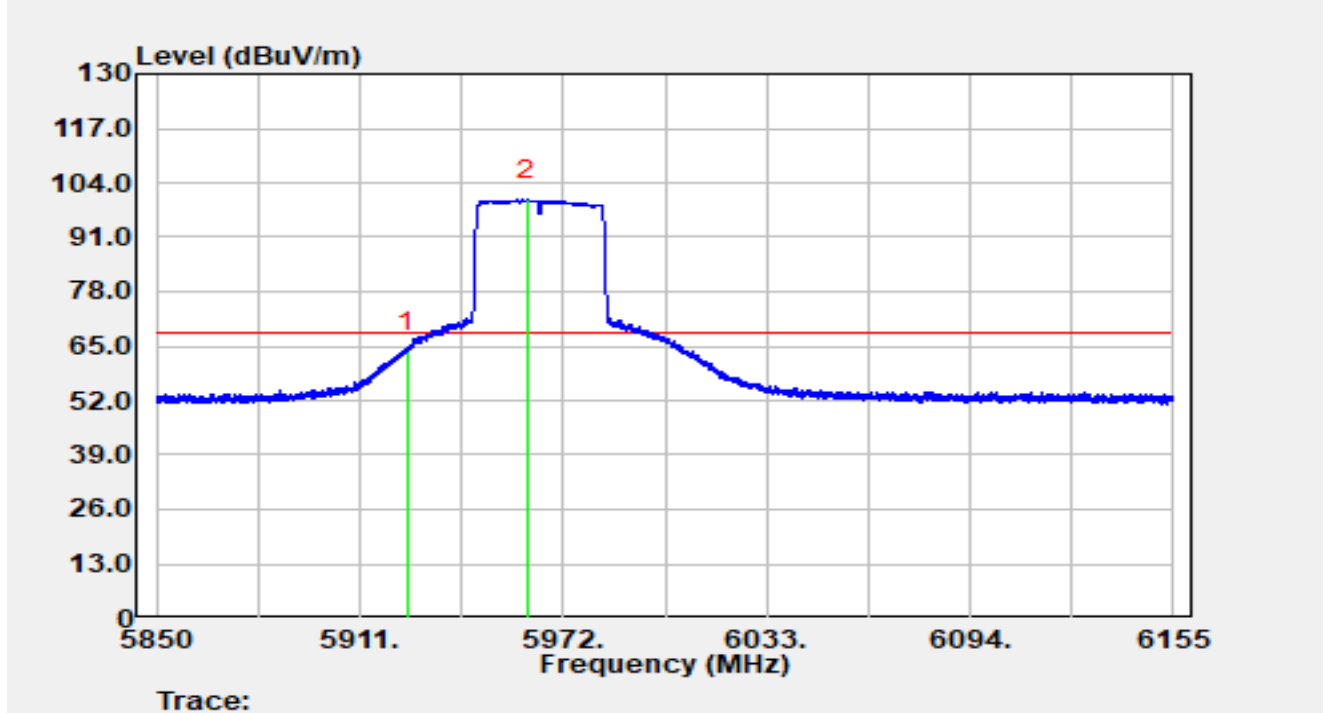


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5925.000	69.28	-5.59	63.69	-4.51	68.20	Average
2		5961.325	105.58	-5.53	100.05	N/A	N/A	Average

Notes:

1. “ * “, means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-06-24
Temperature	23.1 °C	Humidity	65.1%
Limit	FCC_Part 15_Band Edge(3 m)_6G	Test Engineer	Mero Zhou
Factor	HF907_102861	Polarity	Vertical
EUT	ACCESS POINT	Test Voltage	By PoE
Test Mode	Transmit by 802.11be-EHT40 at 5965 MHz		

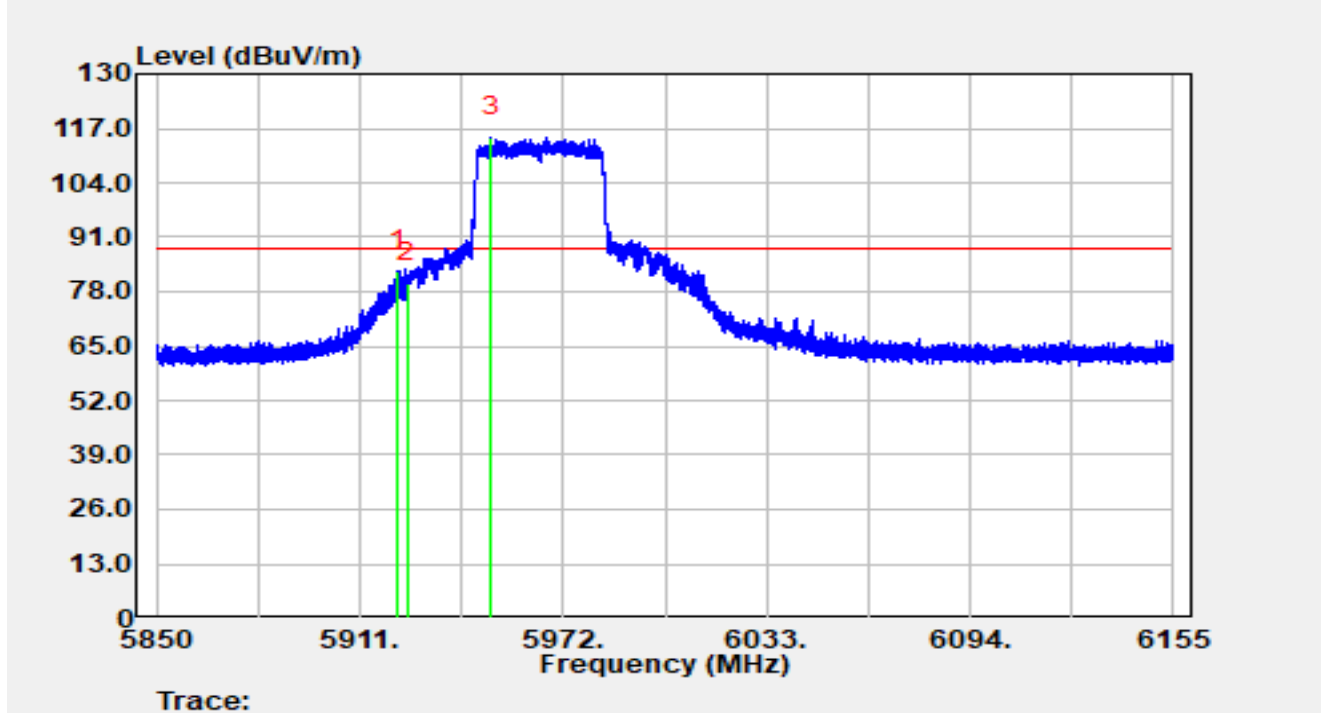


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5922.499	88.59	-5.62	82.97	-5.23	88.20	Peak
2		5925.000	85.59	-5.59	80.00	-8.20	88.20	Peak
3		5950.192	120.58	-5.66	114.92	N/A	N/A	Peak

Notes:

1. “ * “, means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-06-24
Temperature	23.1 °C	Humidity	65.1%
Limit	FCC_Part 15_Band Edge(3 m)_6G	Test Engineer	Mero Zhou
Factor	HF907_102861	Polarity	Vertical
EUT	ACCESS POINT	Test Voltage	By PoE
Test Mode	Transmit by 802.11be-EHT40 at 5965 MHz		

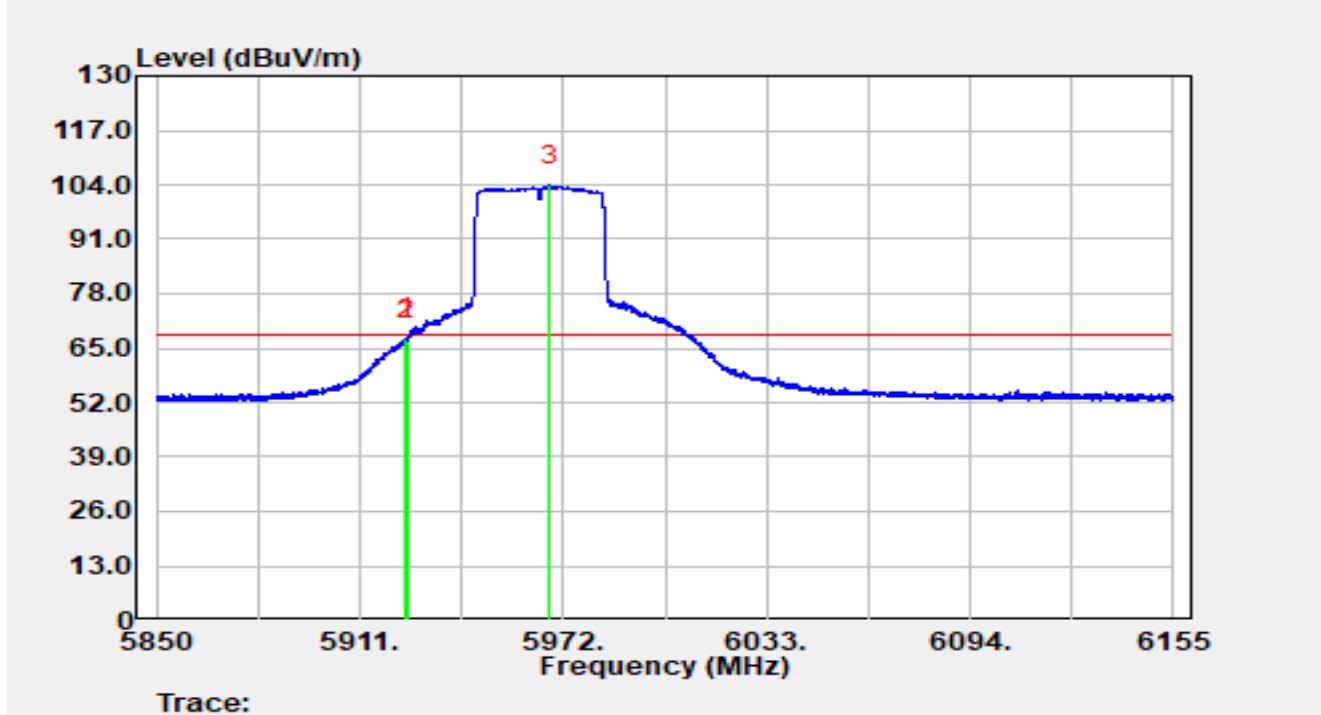


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5924.603	72.99	-5.59	67.40	-0.80	68.20	Average
2		5925.000	72.31	-5.59	66.72	-1.48	68.20	Average
3		5968.035	109.39	-5.55	103.84	N/A	N/A	Average

Notes:

1. “ * “, means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-06-24
Temperature	23.1 °C	Humidity	65.1%
Limit	FCC_Part 15_Band Edge(3 m)_6G	Test Engineer	Mero Zhou
Factor	HF907_102861	Polarity	Horizontal
EUT	ACCESS POINT	Test Voltage	By PoE
Test Mode	Transmit by 802.11be-EHT80 at 5985 MHz		

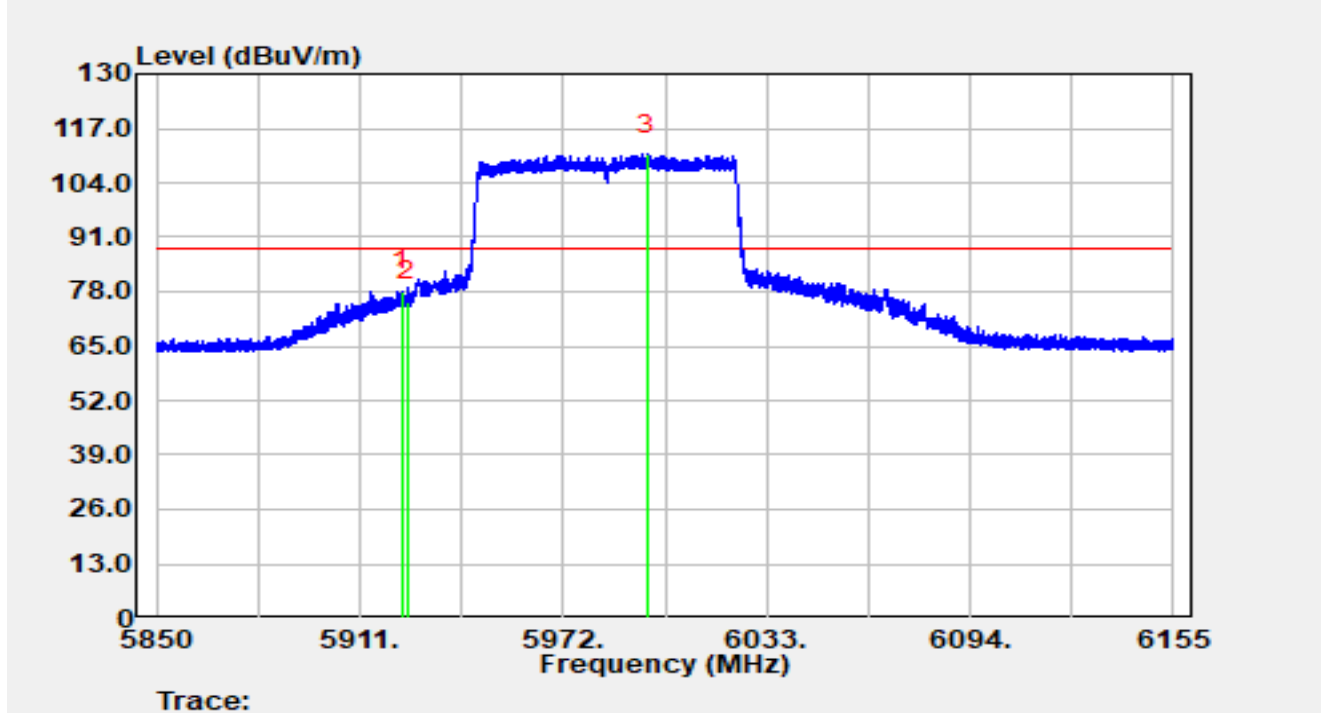


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5923.718	83.82	-5.60	78.22	-9.98	88.20	Peak
2		5925.000	81.30	-5.59	75.71	-12.49	88.20	Peak
3		5997.285	116.32	-5.52	110.80	N/A	N/A	Peak

Notes:

1. “ * “, means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-06-24
Temperature	23.1 °C	Humidity	65.1%
Limit	FCC_Part 15_Band Edge(3 m)_6G	Test Engineer	Mero Zhou
Factor	HF907_102861	Polarity	Horizontal
EUT	ACCESS POINT	Test Voltage	By PoE
Test Mode	Transmit by 802.11be-EHT80 at 5985 MHz		

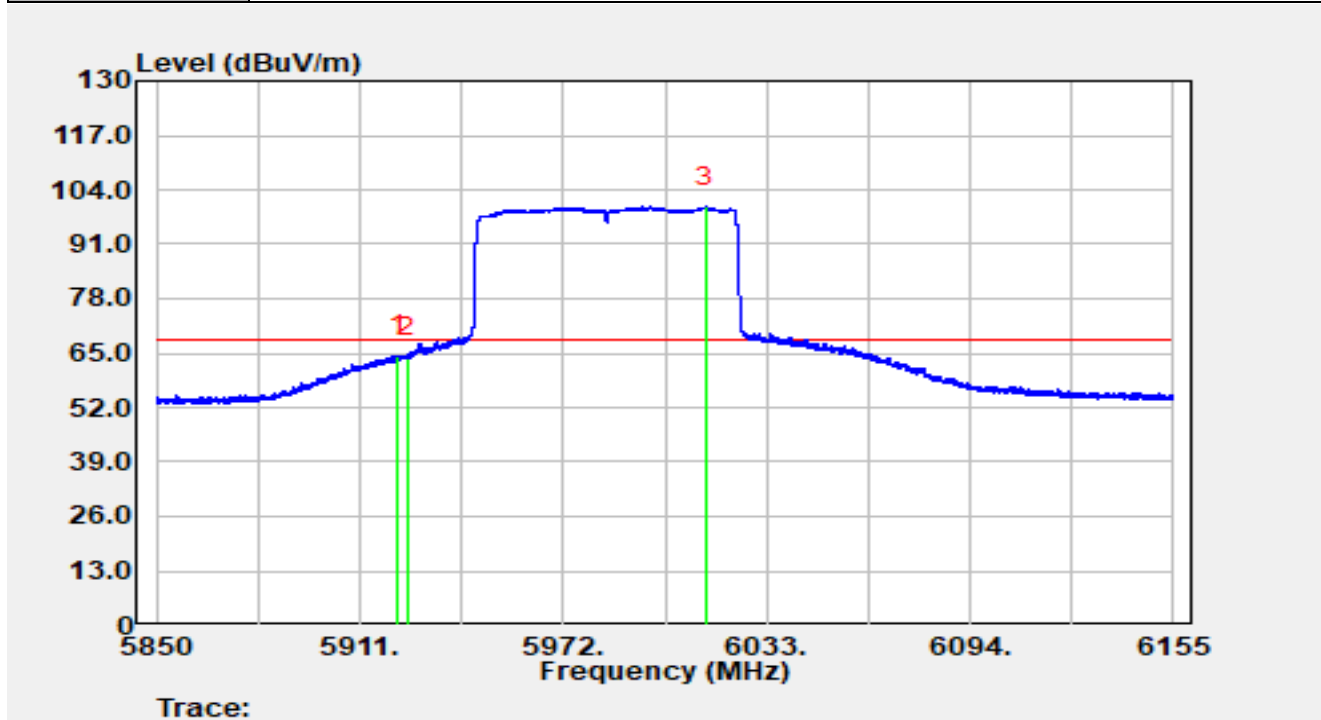


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5922.560	70.10	-5.62	64.48	-3.72	68.20	Average
2		5925.000	69.59	-5.59	64.01	-4.19	68.20	Average
3		6014.547	105.50	-5.54	99.96	N/A	N/A	Average

Notes:

1. “ * “, means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-06-24
Temperature	23.1 °C	Humidity	65.1%
Limit	FCC_Part 15_Band Edge(3 m)_6G	Test Engineer	Mero Zhou
Factor	HF907_102861	Polarity	Vertical
EUT	ACCESS POINT	Test Voltage	By PoE
Test Mode	Transmit by 802.11be-EHT80 at 5985 MHz		

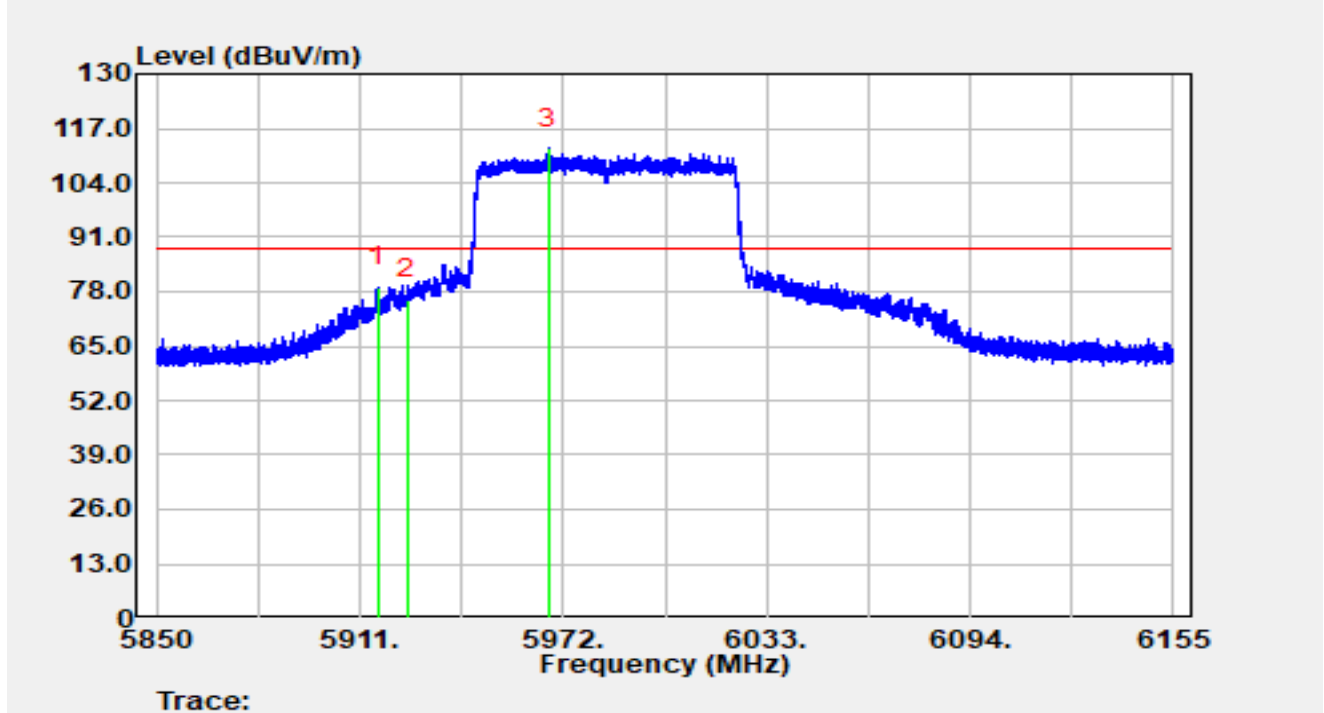


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5916.276	84.76	-5.69	79.07	-9.13	88.20	Peak
2		5925.000	81.79	-5.59	76.20	-12.00	88.20	Peak
3		5967.578	117.76	-5.54	112.22	N/A	N/A	Peak

Notes:

1. “ * “, means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-06-24
Temperature	23.1 °C	Humidity	65.1%
Limit	FCC_Part 15_Band Edge(3 m)_6G	Test Engineer	Mero Zhou
Factor	HF907_102861	Polarity	Vertical
EUT	ACCESS POINT	Test Voltage	By PoE
Test Mode	Transmit by 802.11be-EHT80 at 5985 MHz		

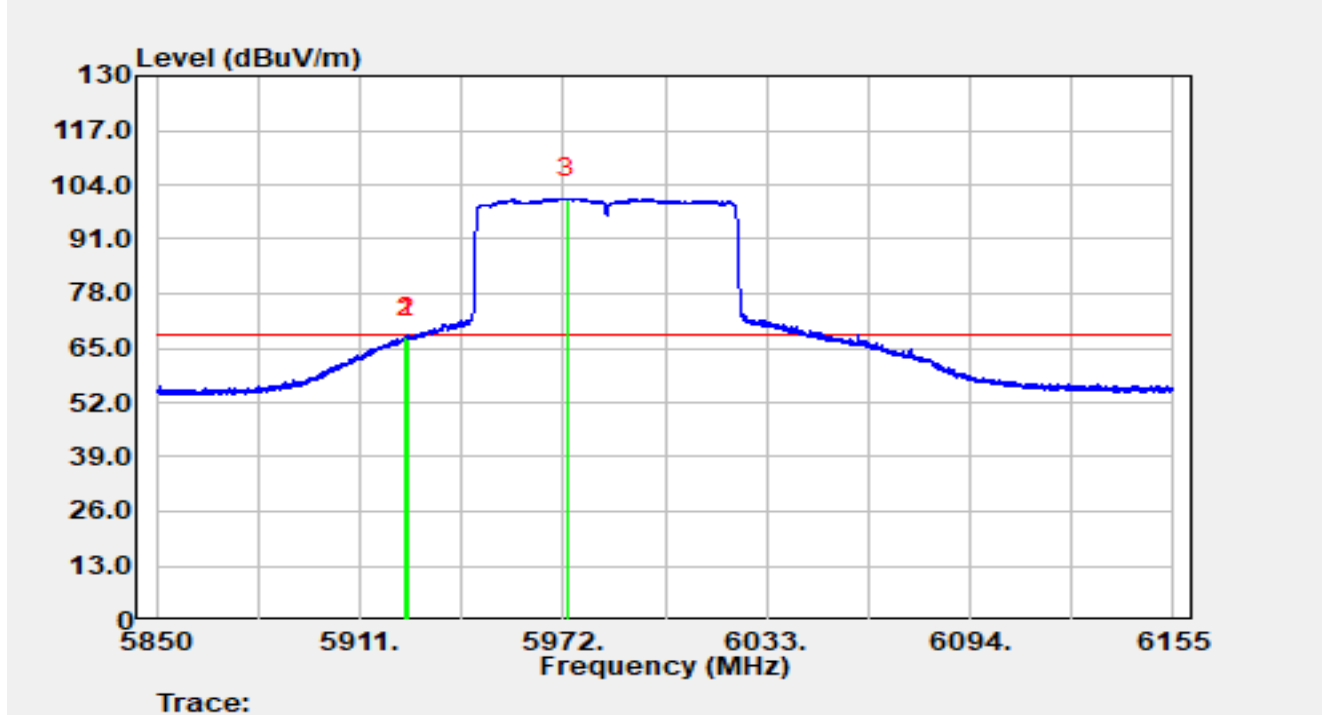


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5924.633	73.06	-5.59	67.47	-0.73	68.20	Average
2		5925.000	72.81	-5.59	67.22	-0.98	68.20	Average
3		5973.159	106.42	-5.61	100.81	N/A	N/A	Average

Notes:

1. “ * “, means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-06-24
Temperature	23.1 °C	Humidity	65.1%
Limit	FCC_Part 15_Band Edge(3 m)_6G	Test Engineer	Mero Zhou
Factor	HF907_102861	Polarity	Horizontal
EUT	ACCESS POINT	Test Voltage	By PoE
Test Mode	Transmit by 802.11be-EHT160 at 6025 MHz		

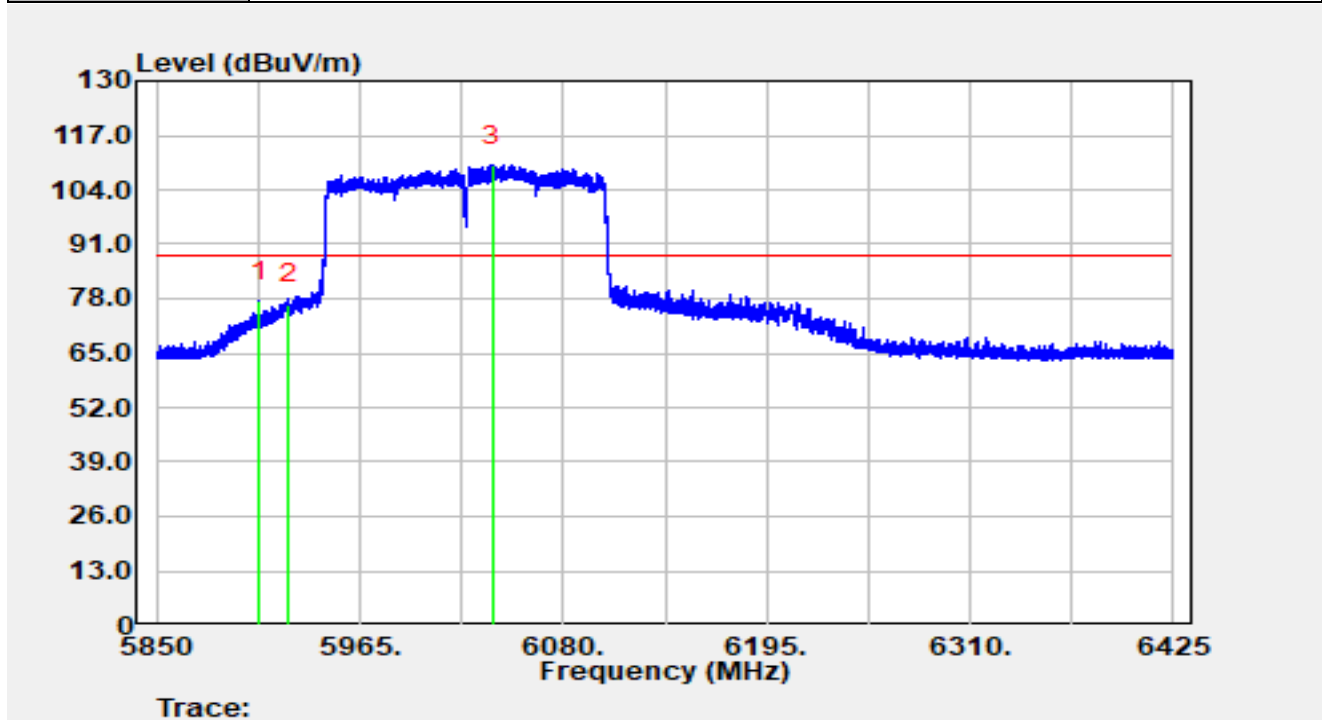


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5907.902	83.13	-5.66	77.47	-10.73	88.20	Peak
2		5925.000	82.34	-5.59	76.75	-11.45	88.20	Peak
3		6039.808	115.46	-5.63	109.83	N/A	N/A	Peak

Notes:

1. “ * “, means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-06-24
Temperature	23.1 °C	Humidity	65.1%
Limit	FCC_Part 15_Band Edge(3 m)_6G	Test Engineer	Mero Zhou
Factor	HF907_102861	Polarity	Horizontal
EUT	ACCESS POINT	Test Voltage	By PoE
Test Mode	Transmit by 802.11be-EHT160 at 6025 MHz		

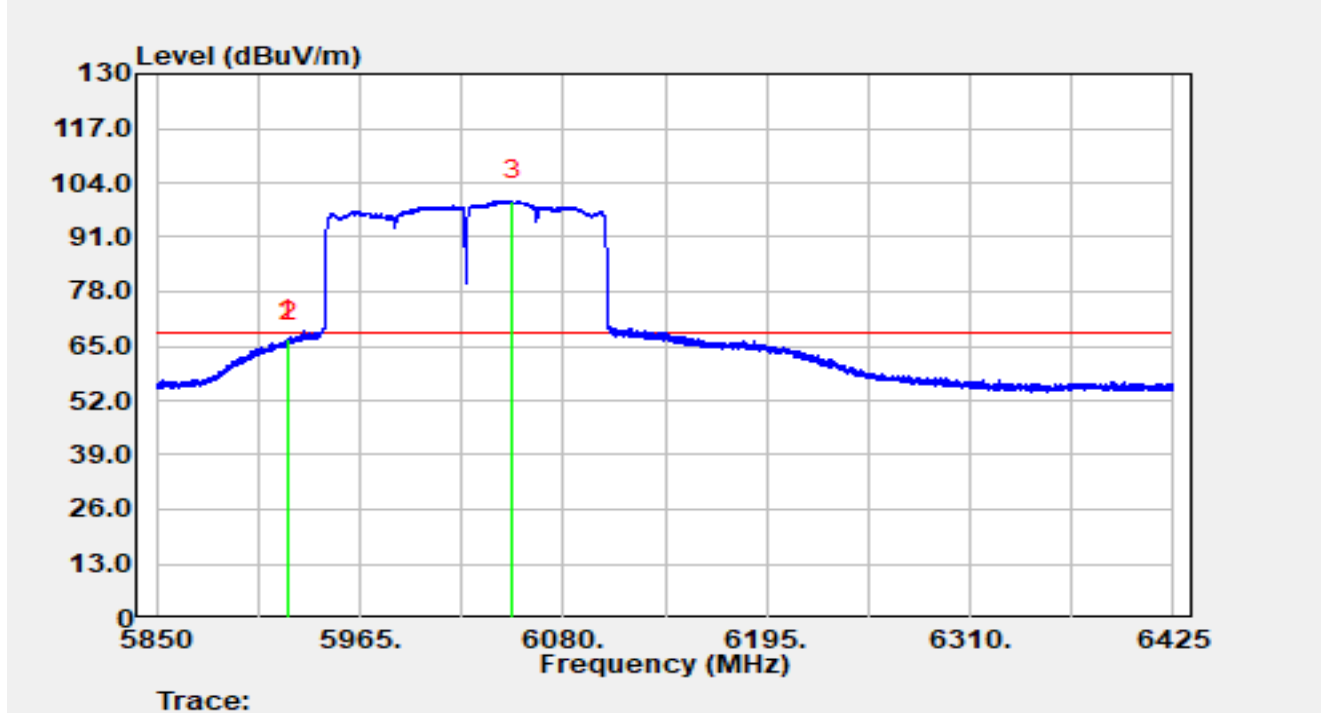


No	Mark	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Detector
1	*	5923.830	72.23	-5.60	66.63	-1.57	68.20	Average
2		5925.000	71.73	-5.59	66.14	-2.06	68.20	Average
3		6050.905	105.45	-5.66	99.79	N/A	N/A	Average

Notes:

1. “ * “, means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) - AMP (dB).
3. Measurement (dBUV/m) = Reading (dBUV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-06-24
Temperature	23.1 °C	Humidity	65.1%
Limit	FCC_Part 15_Band Edge(3 m)_6G	Test Engineer	Mero Zhou
Factor	HF907_102861	Polarity	Vertical
EUT	ACCESS POINT	Test Voltage	By PoE
Test Mode	Transmit by 802.11be-EHT160 at 6025 MHz		

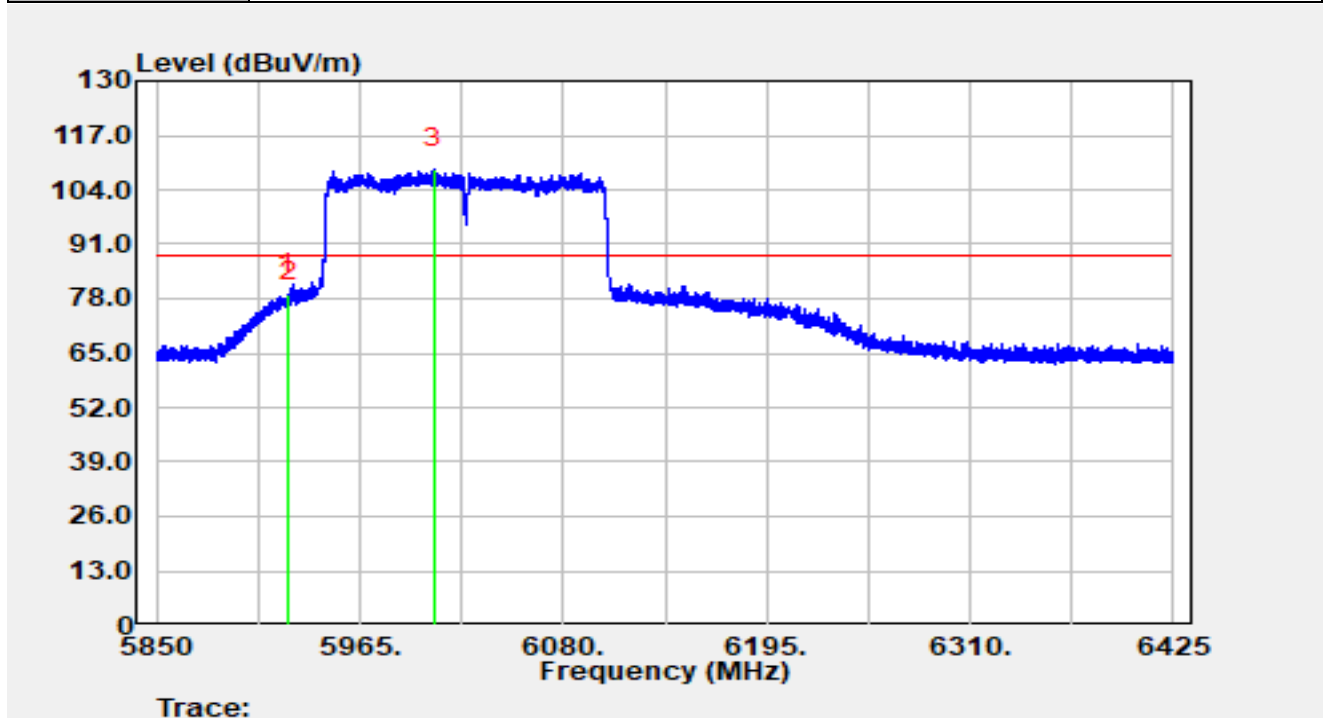


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5924.060	84.78	-5.60	79.18	-9.02	88.20	Peak
2		5925.000	82.65	-5.59	77.06	-11.14	88.20	Peak
3		6006.860	114.56	-5.53	109.03	N/A	N/A	Peak

Notes:

1. “ * “, means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-06-24
Temperature	23.1 °C	Humidity	65.1%
Limit	FCC_Part 15_Band Edge(3 m)_6G	Test Engineer	Mero Zhou
Factor	HF907_102861	Polarity	Vertical
EUT	ACCESS POINT	Test Voltage	By PoE
Test Mode	Transmit by 802.11be-EHT160 at 6025 MHz		

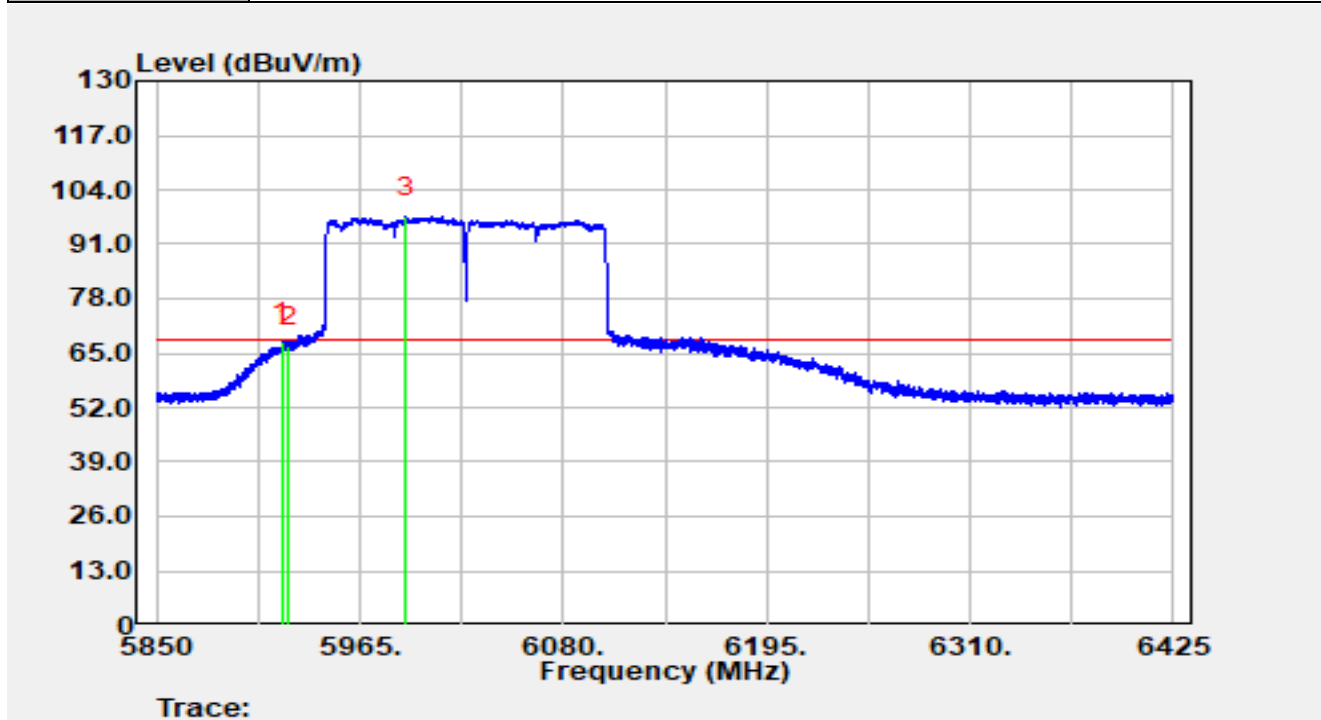


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5920.955	73.20	-5.63	67.56	-0.64	68.20	Average
2		5925.000	72.07	-5.59	66.48	-1.72	68.20	Average
3		5991.220	103.20	-5.59	97.60	N/A	N/A	Average

Notes:

1. “ * “, means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

2*2 Directional:

Site	SIP-AC3	Test Date	2025-06-24
Temperature	23.8 °C	Humidity	61.1%
Limit	FCC_Part 15_Band Edge(3 m)_6G	Test Engineer	Mero Zhou
Factor	BBHA 9120D_02042	Polarity	Horizontal
EUT	ACCESS POINT	Test Voltage	By PoE
Test Mode	Transmit by 802.11be-EHT20 at 5955 MHz		

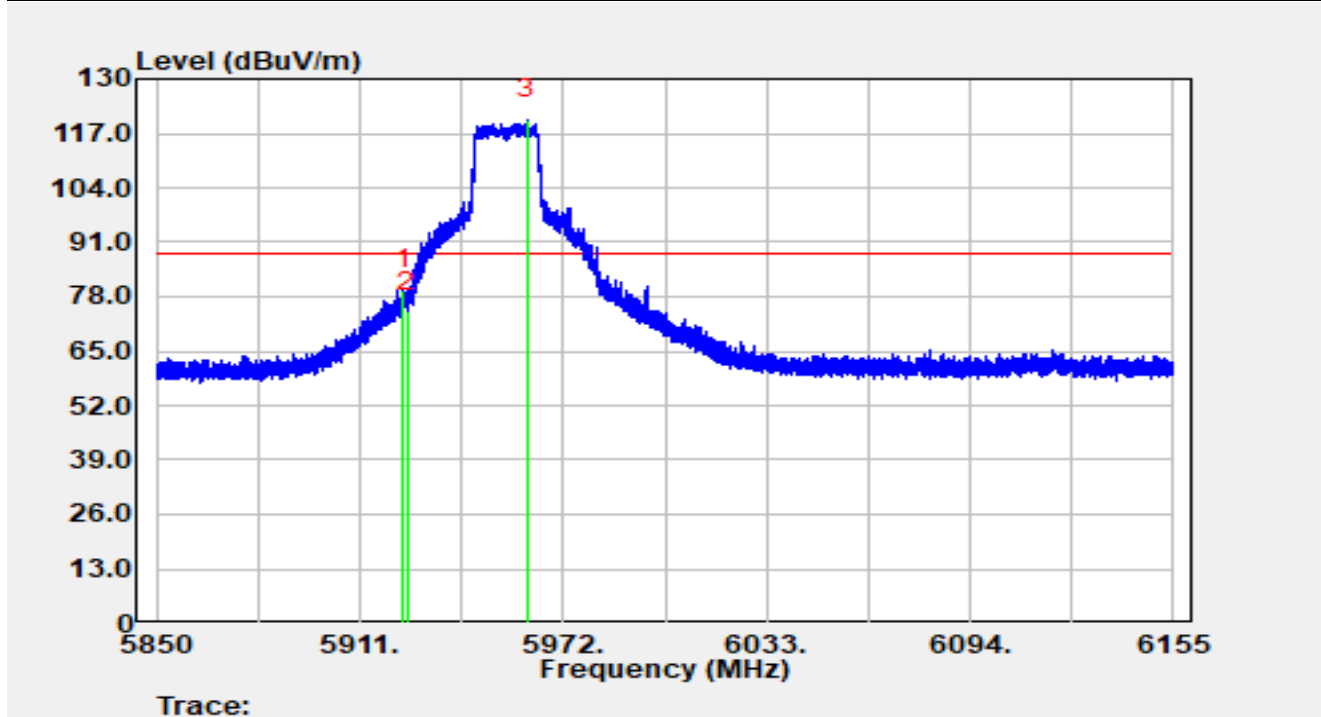


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5923.901	87.01	-7.52	79.48	-8.72	88.20	Peak
2		5925.000	81.84	-7.51	74.32	-13.88	88.20	Peak
3		5961.020	127.83	-7.51	120.32	N/A	N/A	Peak

Notes:

1. “ * “, means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-06-24
Temperature	23.8 °C	Humidity	61.1%
Limit	FCC_Part 15_Band Edge(3 m)_6G	Test Engineer	Mero Zhou
Factor	BBHA 9120D_02042	Polarity	Horizontal
EUT	ACCESS POINT	Test Voltage	By PoE
Test Mode	Transmit by 802.11be-EHT20 at 5955 MHz		

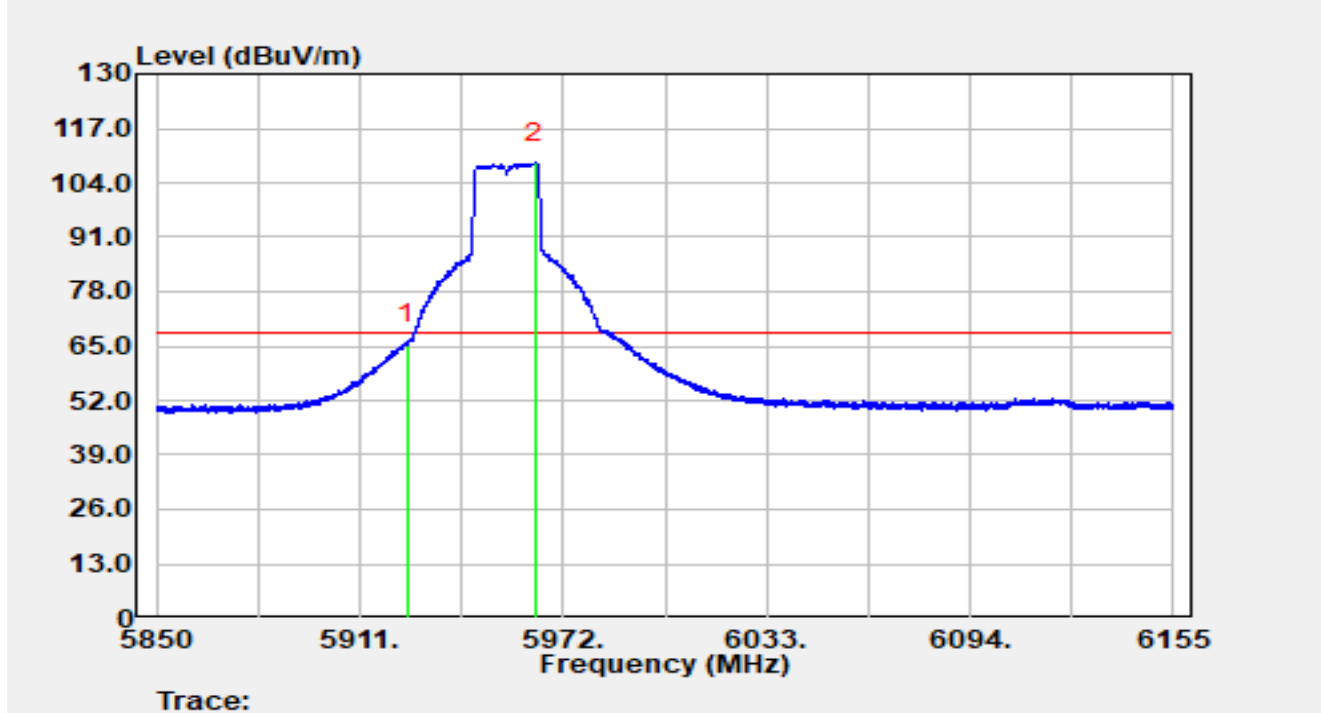


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5925.000	72.94	-7.51	65.43	-2.77	68.20	Average
2		5963.734	116.21	-7.48	108.73	N/A	N/A	Average

Notes:

1. “ * “, means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-06-24
Temperature	23.8 °C	Humidity	61.1%
Limit	FCC_Part 15_Band Edge(3 m)_6G	Test Engineer	Mero Zhou
Factor	BBHA 9120D_02042	Polarity	Vertical
EUT	ACCESS POINT	Test Voltage	By PoE
Test Mode	Transmit by 802.11be-EHT20 at 5955 MHz		

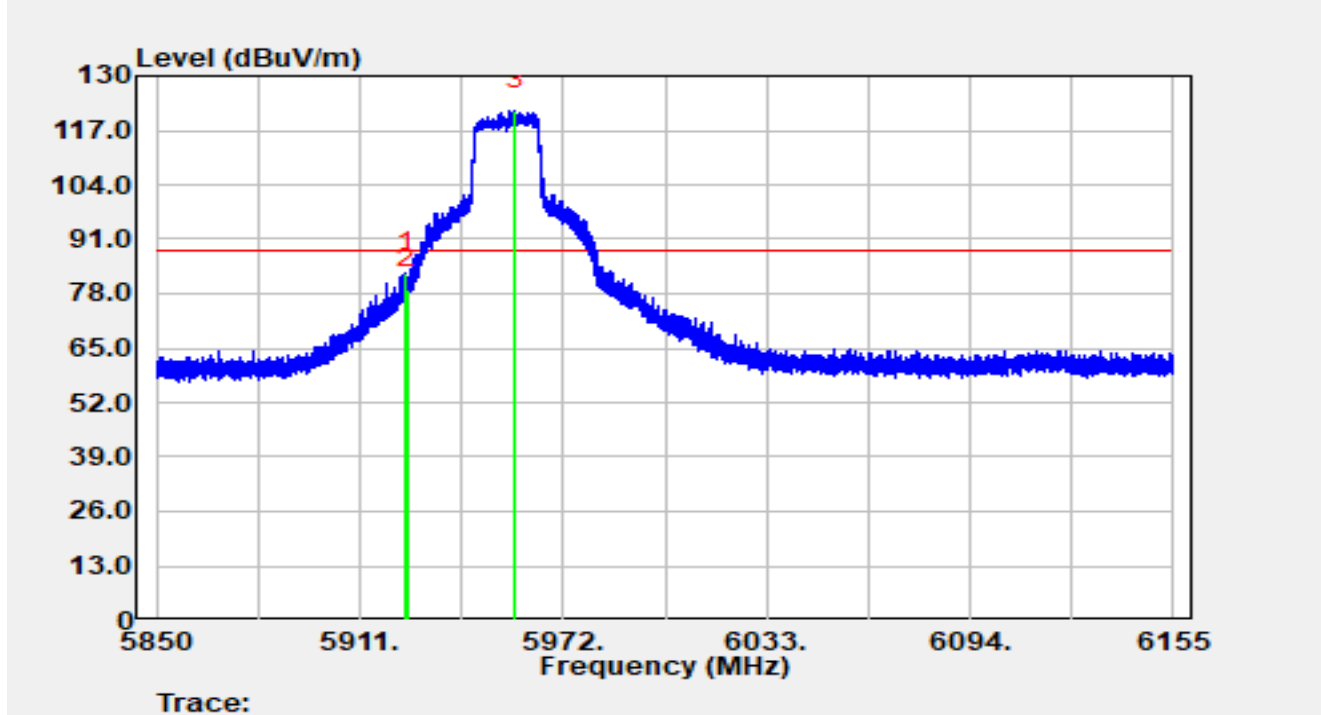


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5924.786	90.43	-7.52	82.91	-5.29	88.20	Peak
2		5925.000	86.62	-7.51	79.10	-9.10	88.20	Peak
3		5957.543	129.25	-7.55	121.70	N/A	N/A	Peak

Notes:

1. “ * “, means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-06-24
Temperature	23.8 °C	Humidity	61.1%
Limit	FCC_Part 15_Band Edge(3 m)_6G	Test Engineer	Mero Zhou
Factor	BBHA 9120D_02042	Polarity	Vertical
EUT	ACCESS POINT	Test Voltage	By PoE
Test Mode	Transmit by 802.11be-EHT20 at 5955 MHz		

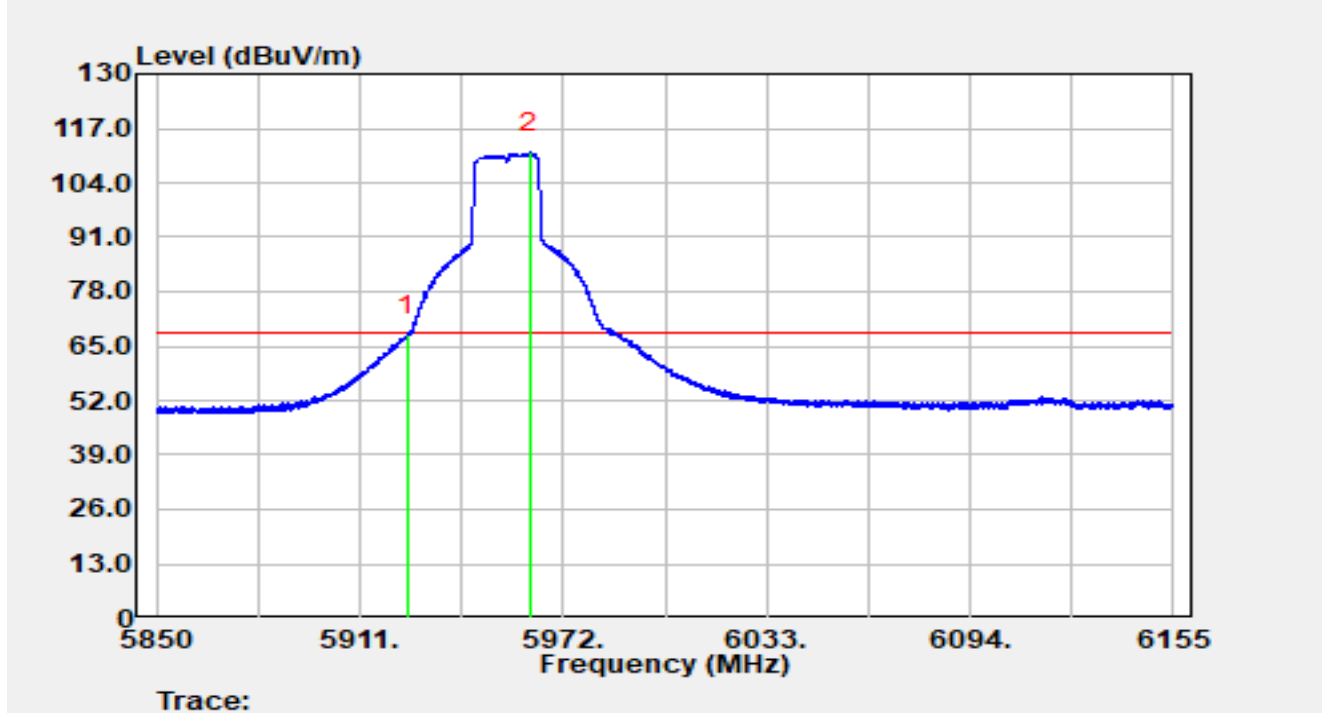


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5925.000	75.06	-7.51	67.55	-0.65	68.20	Average
2		5961.965	118.64	-7.50	111.14	N/A	N/A	Average

Notes:

1. “ * “, means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-06-24
Temperature	23.8 °C	Humidity	61.1%
Limit	FCC_Part 15_Band Edge(3 m)_6G	Test Engineer	Mero Zhou
Factor	BBHA 9120D_02042	Polarity	Horizontal
EUT	ACCESS POINT	Test Voltage	By PoE
Test Mode	Transmit by 802.11be-EHT40 at 5965 MHz		

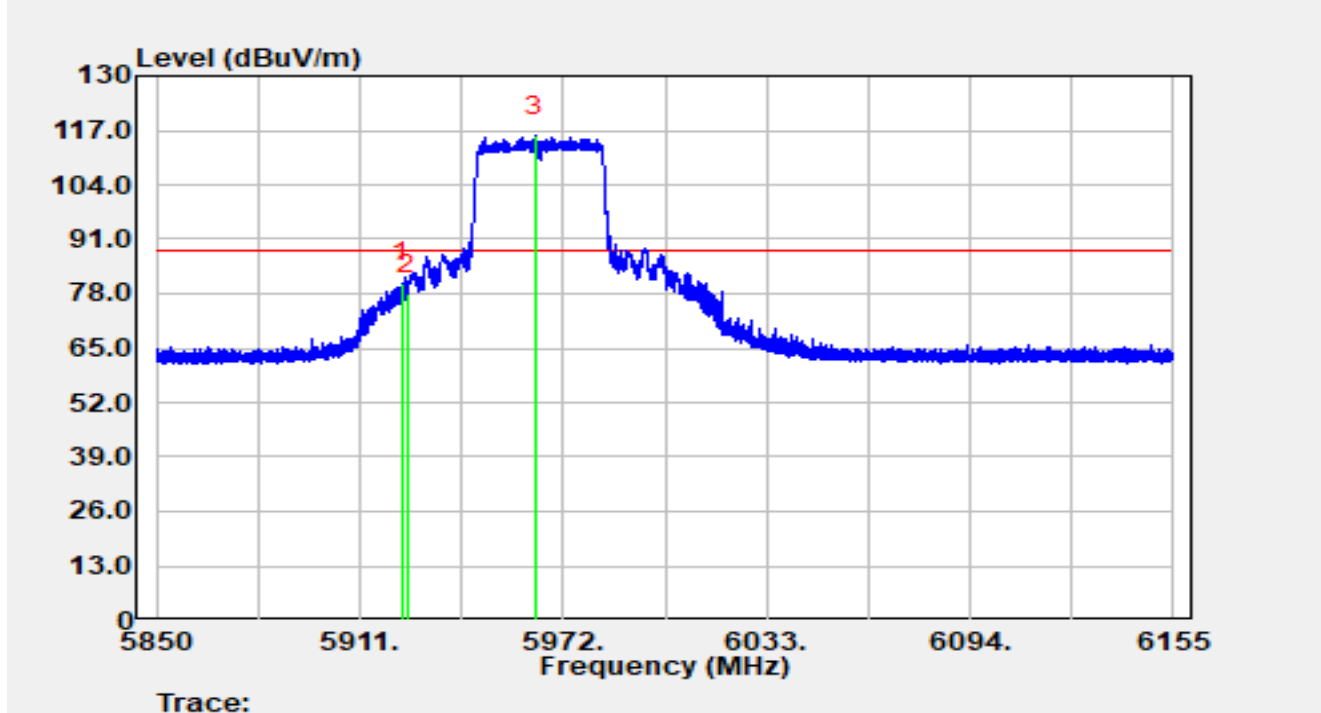


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5923.597	88.04	-7.53	80.51	-7.69	88.20	Peak
2		5925.000	85.29	-7.51	77.78	-10.42	88.20	Peak
3		5963.612	123.06	-7.48	115.57	N/A	N/A	Peak

Notes:

1. “ * “, means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-06-24
Temperature	23.8 °C	Humidity	61.1%
Limit	FCC_Part 15_Band Edge(3 m)_6G	Test Engineer	Mero Zhou
Factor	BBHA 9120D_02042	Polarity	Horizontal
EUT	ACCESS POINT	Test Voltage	By PoE
Test Mode	Transmit by 802.11be-EHT40 at 5965 MHz		

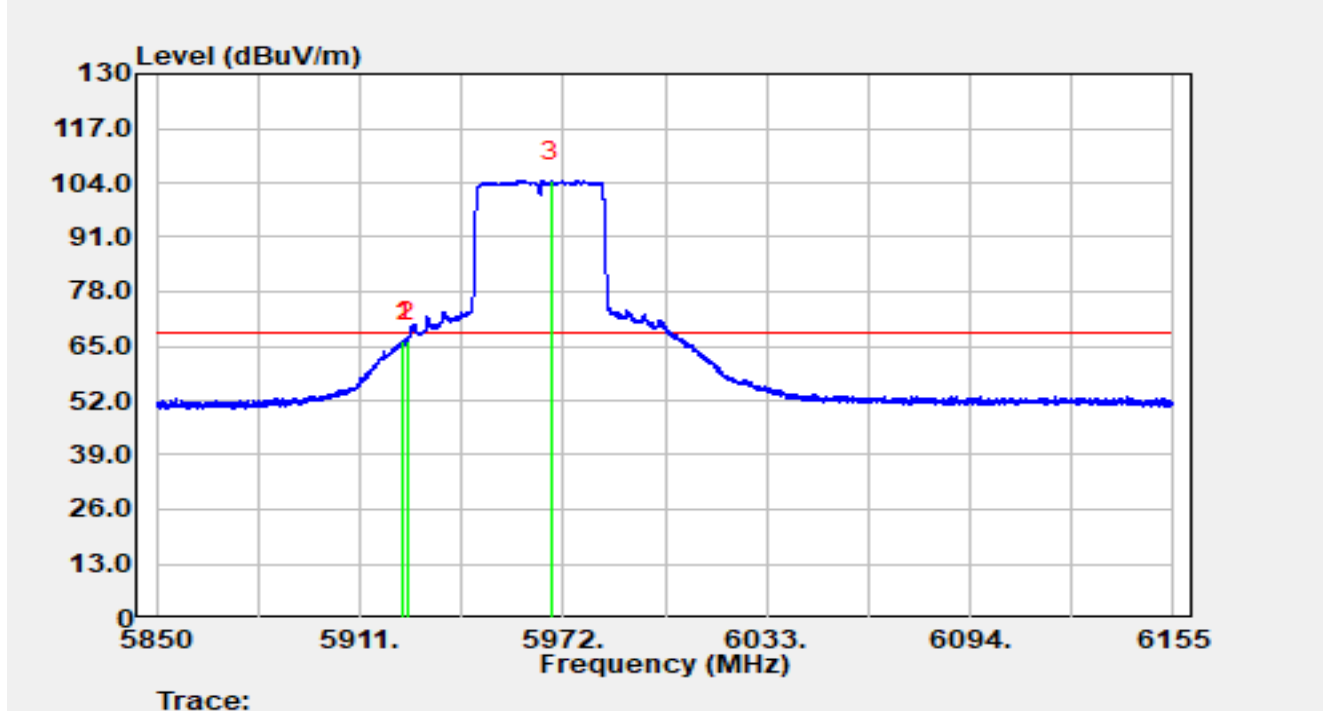


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5923.901	73.69	-7.52	66.16	-2.04	68.20	Average
2		5925.000	73.60	-7.51	66.09	-2.11	68.20	Average
3		5968.371	112.02	-7.54	104.48	N/A	N/A	Average

Notes:

1. “ * “, means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-06-24
Temperature	23.8 °C	Humidity	61.1%
Limit	FCC_Part 15_Band Edge(3 m)_6G	Test Engineer	Mero Zhou
Factor	BBHA 9120D_02042	Polarity	Vertical
EUT	ACCESS POINT	Test Voltage	By PoE
Test Mode	Transmit by 802.11be-EHT40 at 5965 MHz		

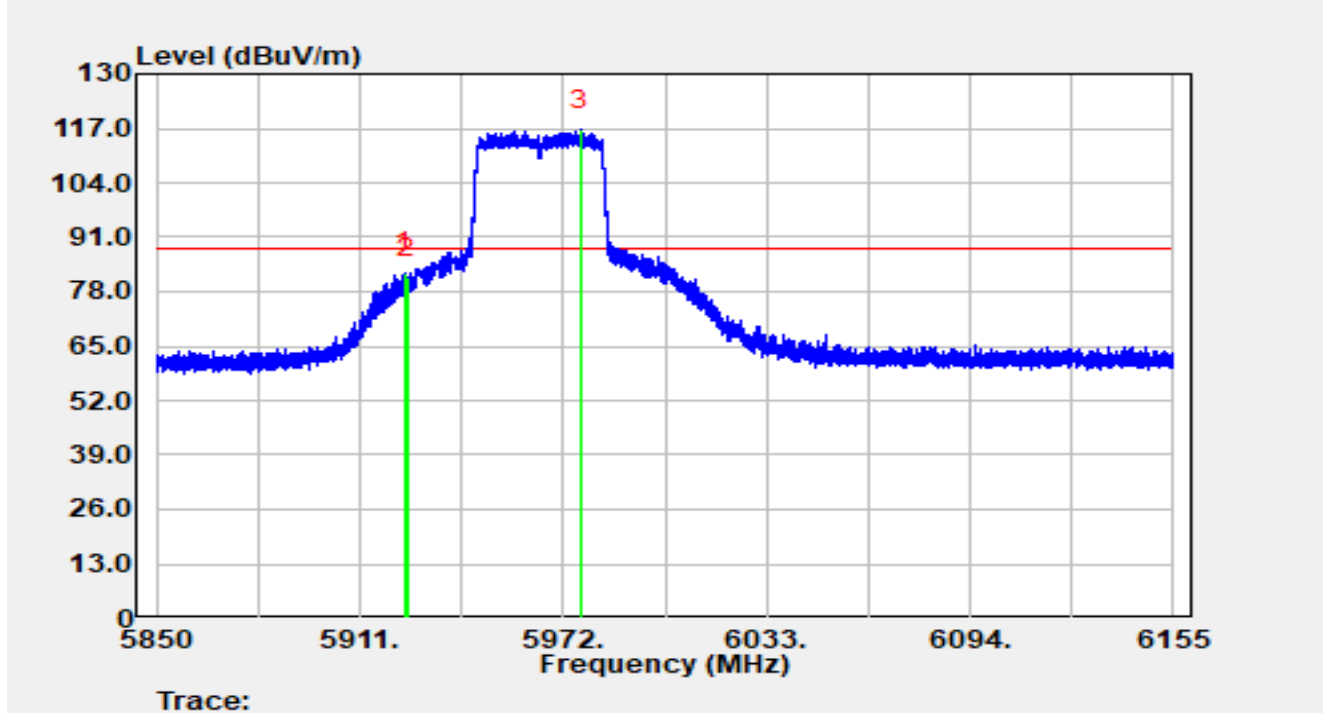


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5924.451	90.04	-7.52	82.52	-5.68	88.20	Peak
2		5925.000	88.87	-7.51	81.36	-6.84	88.20	Peak
3		5972.276	124.38	-7.66	116.72	N/A	N/A	Peak

Notes:

1. “ * “, means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-06-24
Temperature	23.8 °C	Humidity	61.1%
Limit	FCC_Part 15_Band Edge(3 m)_6G	Test Engineer	Mero Zhou
Factor	BBHA 9120D_02042	Polarity	Vertical
EUT	ACCESS POINT	Test Voltage	By PoE
Test Mode	Transmit by 802.11be-EHT40 at 5965 MHz		

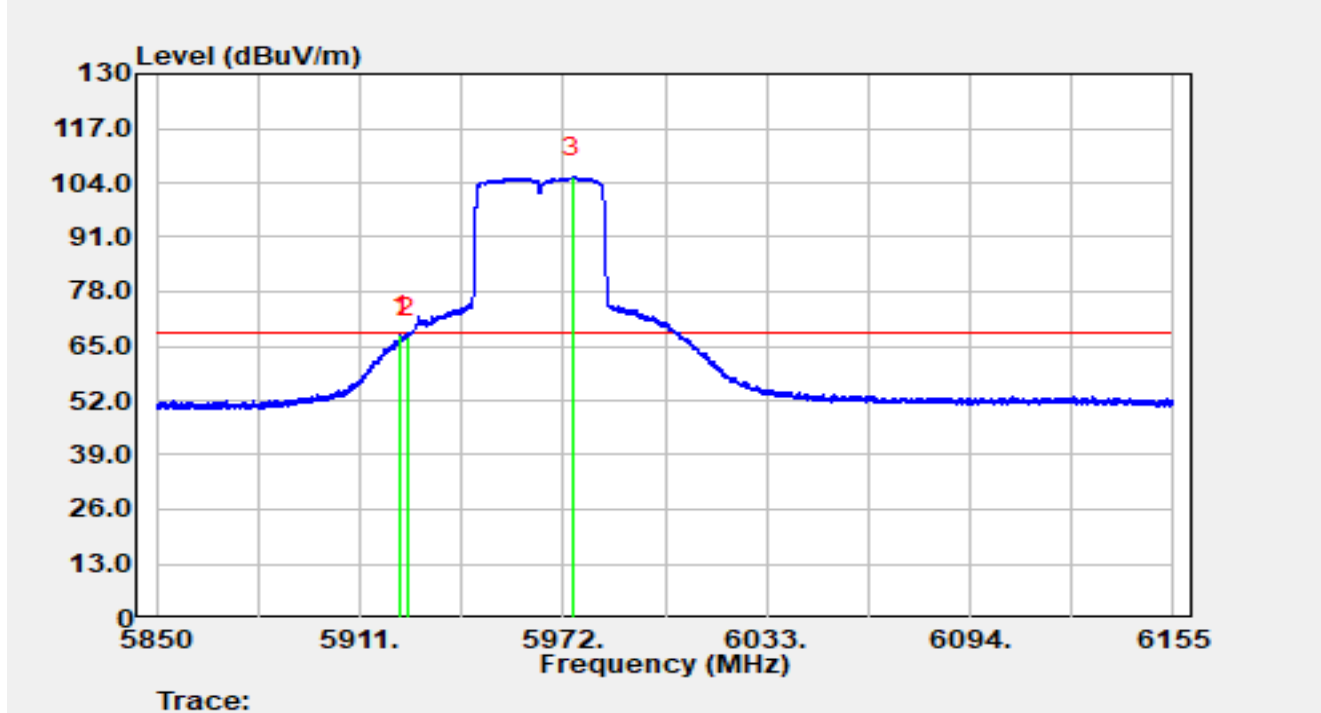


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5923.322	75.03	-7.53	67.50	-0.70	68.20	Average
2		5925.000	74.61	-7.51	67.09	-1.11	68.20	Average
3		5974.867	113.03	-7.63	105.40	N/A	N/A	Average

Notes:

1. “ * “, means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-06-24
Temperature	23.8 °C	Humidity	61.1%
Limit	FCC_Part 15_Band Edge(3 m)_6G	Test Engineer	Mero Zhou
Factor	BBHA 9120D_02042	Polarity	Horizontal
EUT	ACCESS POINT	Test Voltage	By PoE
Test Mode	Transmit by 802.11be-EHT80 at 5985 MHz		

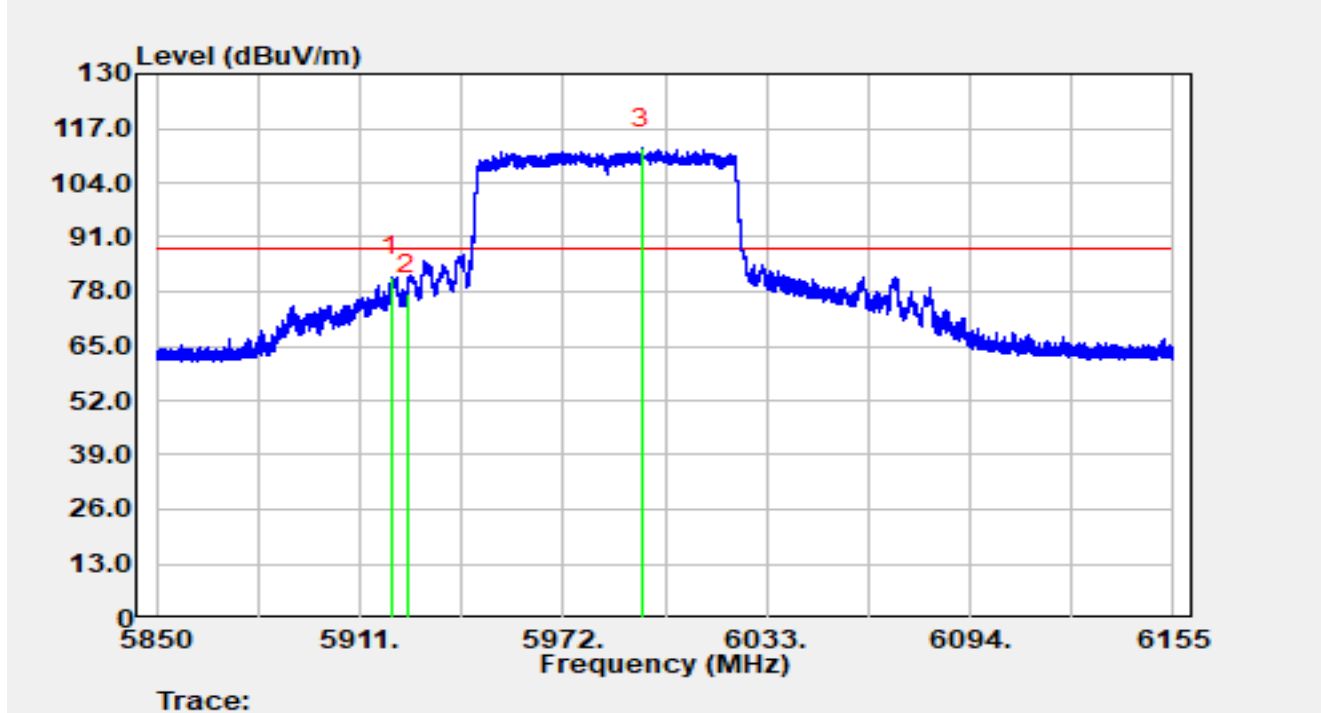


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5920.577	89.03	-7.56	81.48	-6.72	88.20	Peak
2		5925.000	84.94	-7.51	77.43	-10.77	88.20	Peak
3		5995.699	119.81	-7.54	112.27	N/A	N/A	Peak

Notes:

1. “ * “, means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-06-24
Temperature	23.8 °C	Humidity	61.1%
Limit	FCC_Part 15_Band Edge(3 m)_6G	Test Engineer	Mero Zhou
Factor	BBHA 9120D_02042	Polarity	Horizontal
EUT	ACCESS POINT	Test Voltage	By PoE
Test Mode	Transmit by 802.11be-EHT80 at 5985 MHz		

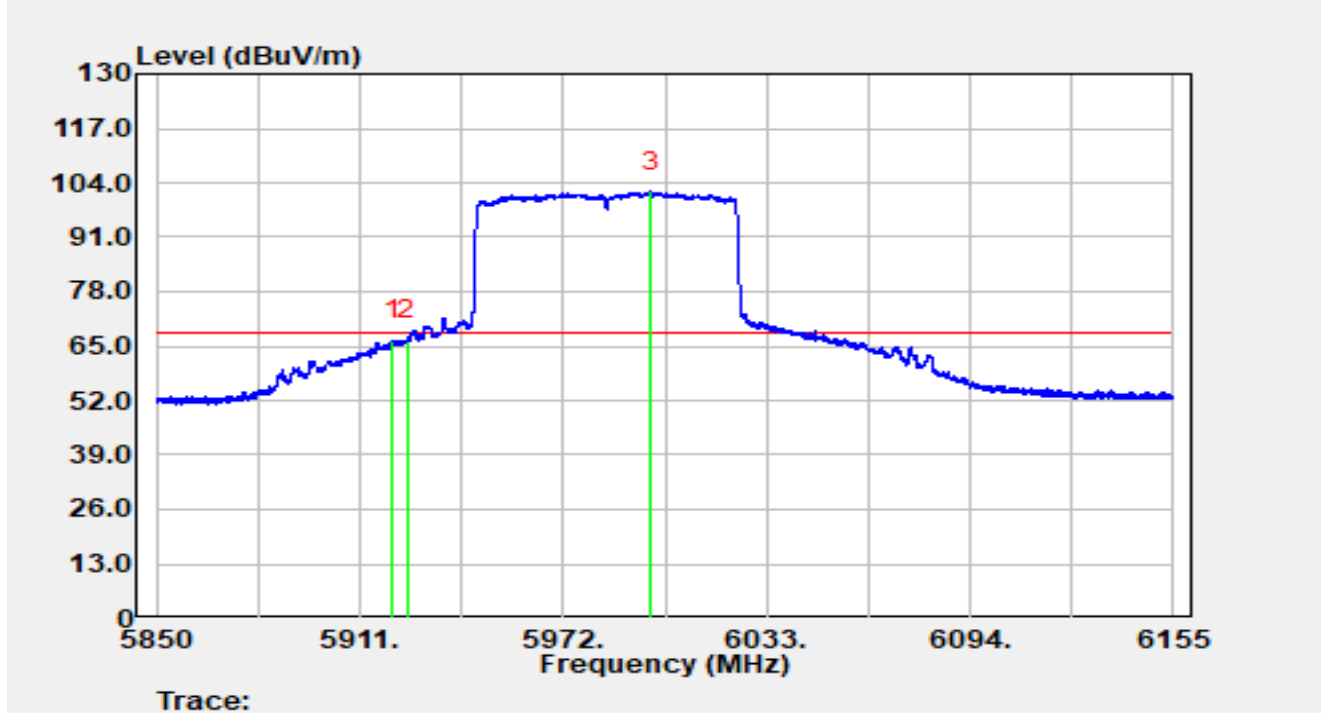


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5920.943	73.94	-7.55	66.38	-1.82	68.20	Average
2		5925.000	73.86	-7.51	66.34	-1.86	68.20	Average
3		5998.474	109.41	-7.52	101.89	N/A	N/A	Average

Notes:

1. “ * “, means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-06-24
Temperature	23.8 °C	Humidity	61.1%
Limit	FCC_Part 15_Band Edge(3 m)_6G	Test Engineer	Mero Zhou
Factor	BBHA 9120D_02042	Polarity	Vertical
EUT	ACCESS POINT	Test Voltage	By PoE
Test Mode	Transmit by 802.11be-EHT80 at 5985 MHz		

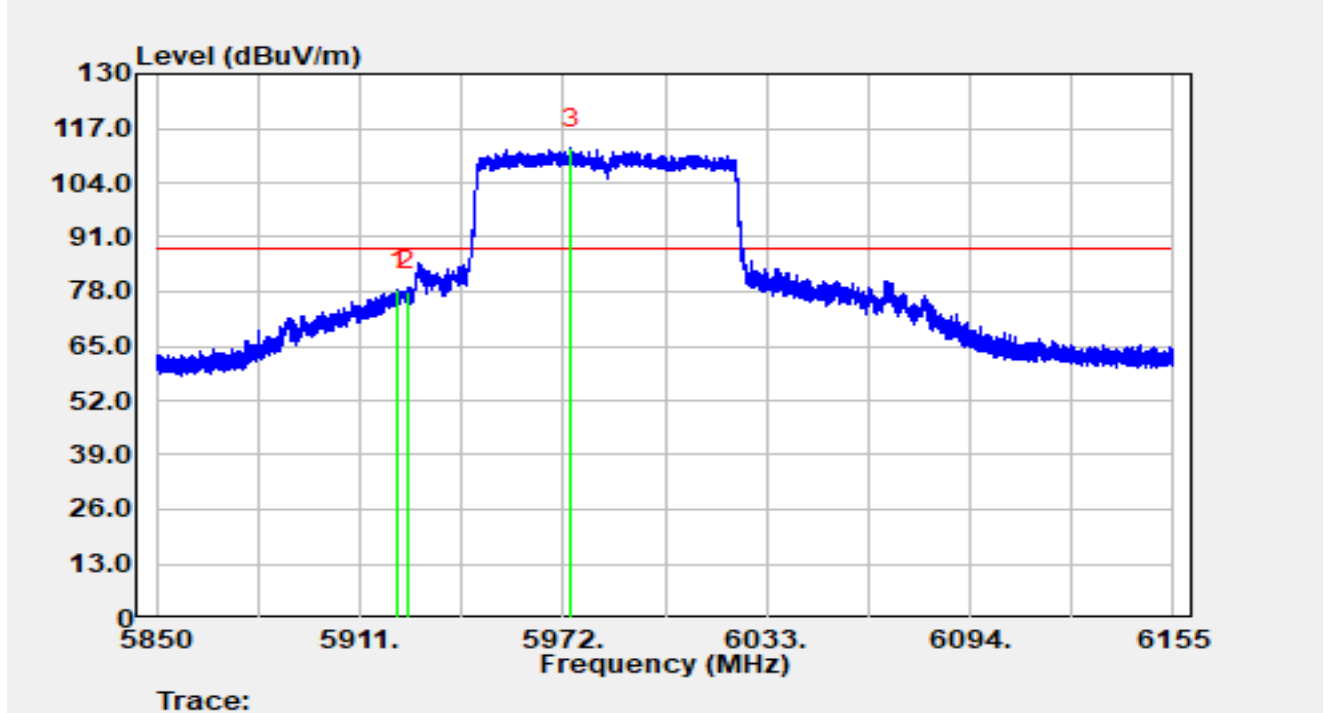


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5922.407	85.81	-7.54	78.27	-9.93	88.20	Peak
2		5925.000	85.62	-7.51	78.10	-10.10	88.20	Peak
3		5974.196	119.92	-7.62	112.31	N/A	N/A	Peak

Notes:

1. “ * “, means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-06-24
Temperature	23.8 °C	Humidity	61.1%
Limit	FCC_Part 15_Band Edge(3 m)_6G	Test Engineer	Mero Zhou
Factor	BBHA 9120D_02042	Polarity	Vertical
EUT	ACCESS POINT	Test Voltage	By PoE
Test Mode	Transmit by 802.11be-EHT80 at 5985 MHz		

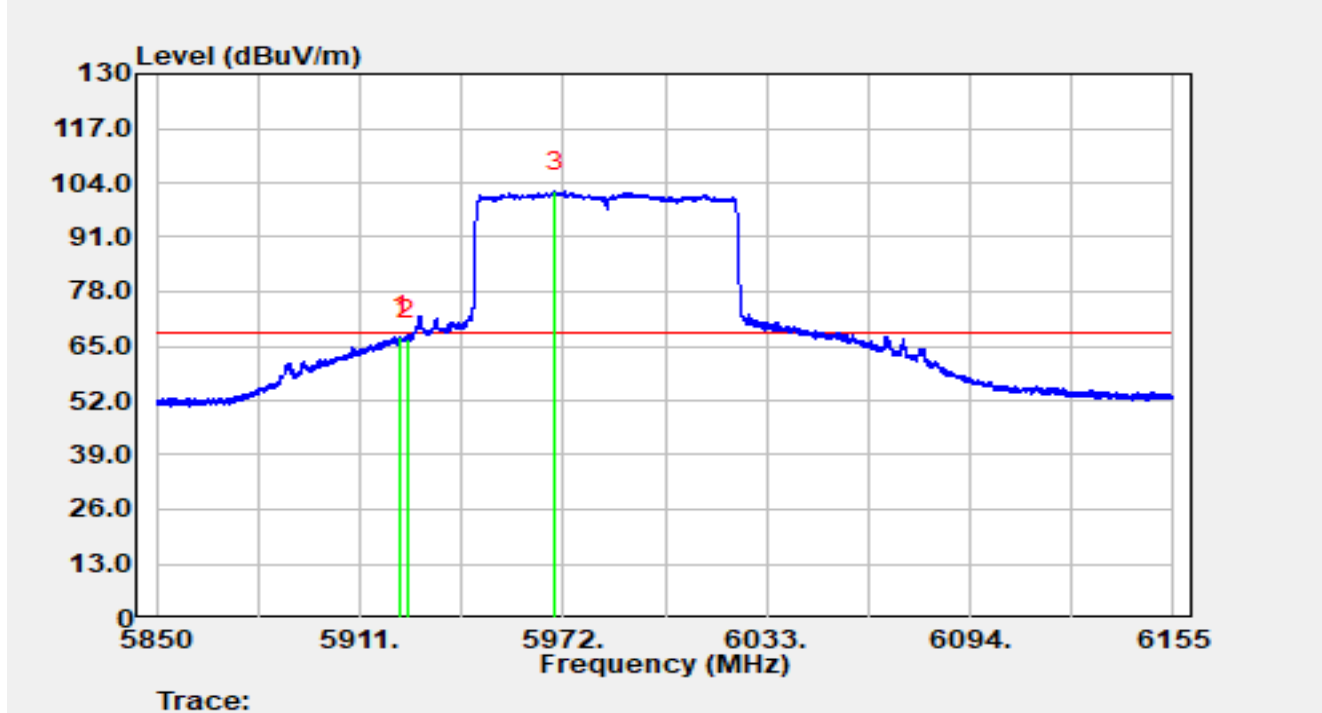


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5923.017	74.75	-7.53	67.22	-0.98	68.20	Average
2		5925.000	74.13	-7.51	66.62	-1.58	68.20	Average
3		5969.590	109.50	-7.55	101.95	N/A	N/A	Average

Notes:

1. “ * “, means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-06-24
Temperature	23.8 °C	Humidity	61.1%
Limit	FCC_Part 15_Band Edge(3 m)_6G	Test Engineer	Mero Zhou
Factor	BBHA 9120D_02042	Polarity	Horizontal
EUT	ACCESS POINT	Test Voltage	By PoE
Test Mode	Transmit by 802.11be-EHT160 at 6025 MHz		

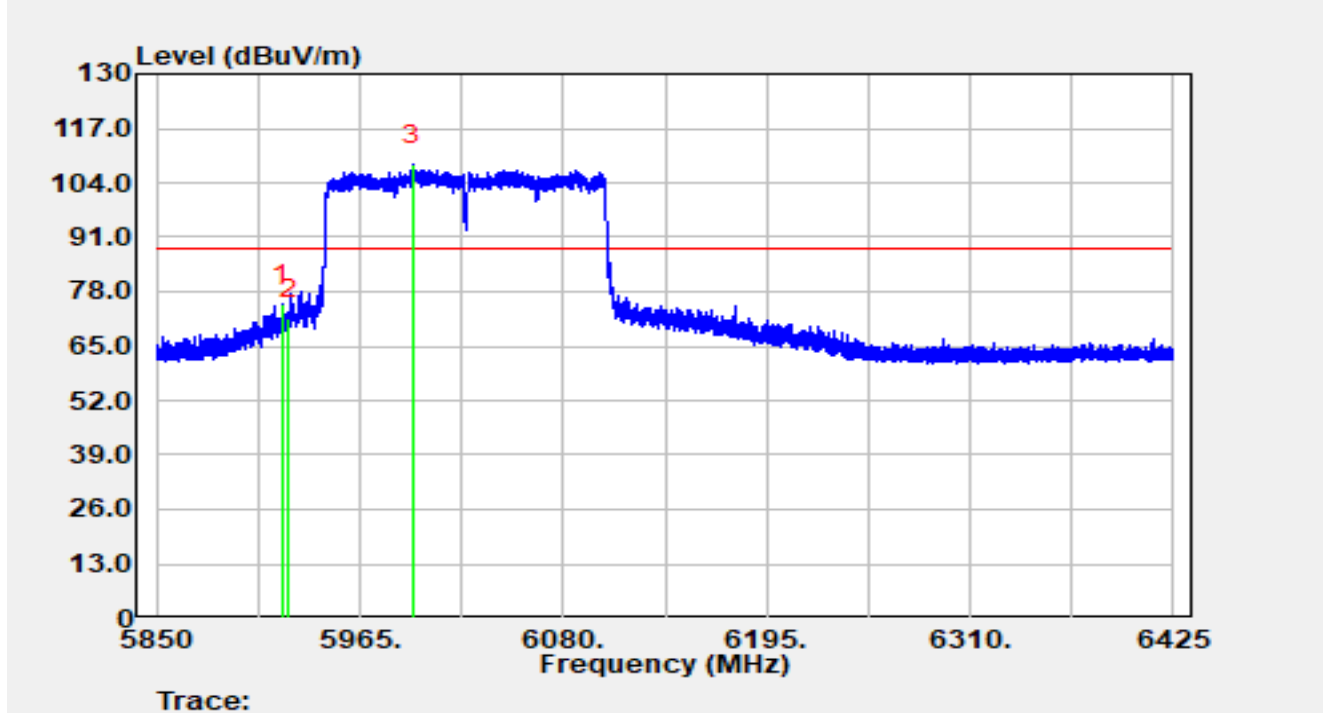


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5921.127	82.37	-7.55	74.82	-13.38	88.20	Peak
2		5925.000	78.89	-7.51	71.38	-16.82	88.20	Peak
3		5994.728	115.90	-7.56	108.35	N/A	N/A	Peak

Notes:

1. “ * “, means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-06-24
Temperature	23.8 °C	Humidity	61.1%
Limit	FCC_Part 15_Band Edge(3 m)_6G	Test Engineer	Mero Zhou
Factor	BBHA 9120D_02042	Polarity	Horizontal
EUT	ACCESS POINT	Test Voltage	By PoE
Test Mode	Transmit by 802.11be-EHT160 at 6025 MHz		

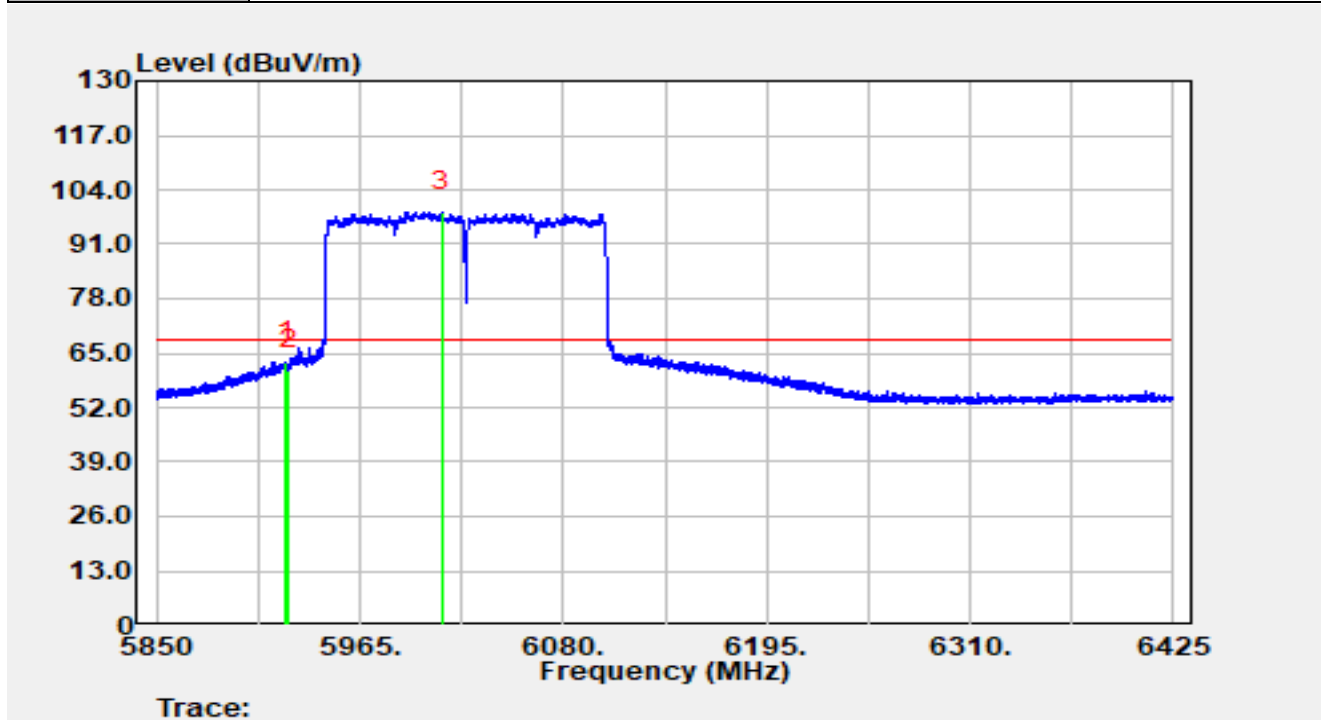


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5923.083	70.48	-7.53	62.95	-5.25	68.20	Average
2		5925.000	68.53	-7.51	61.02	-7.18	68.20	Average
3		6011.345	106.34	-7.56	98.78	N/A	N/A	Average

Notes:

1. “ * “, means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-06-24
Temperature	23.8 °C	Humidity	61.1%
Limit	FCC_Part 15_Band Edge(3 m)_6G	Test Engineer	Mero Zhou
Factor	BBHA 9120D_02042	Polarity	Vertical
EUT	ACCESS POINT	Test Voltage	By PoE
Test Mode	Transmit by 802.11be-EHT160 at 6025 MHz		

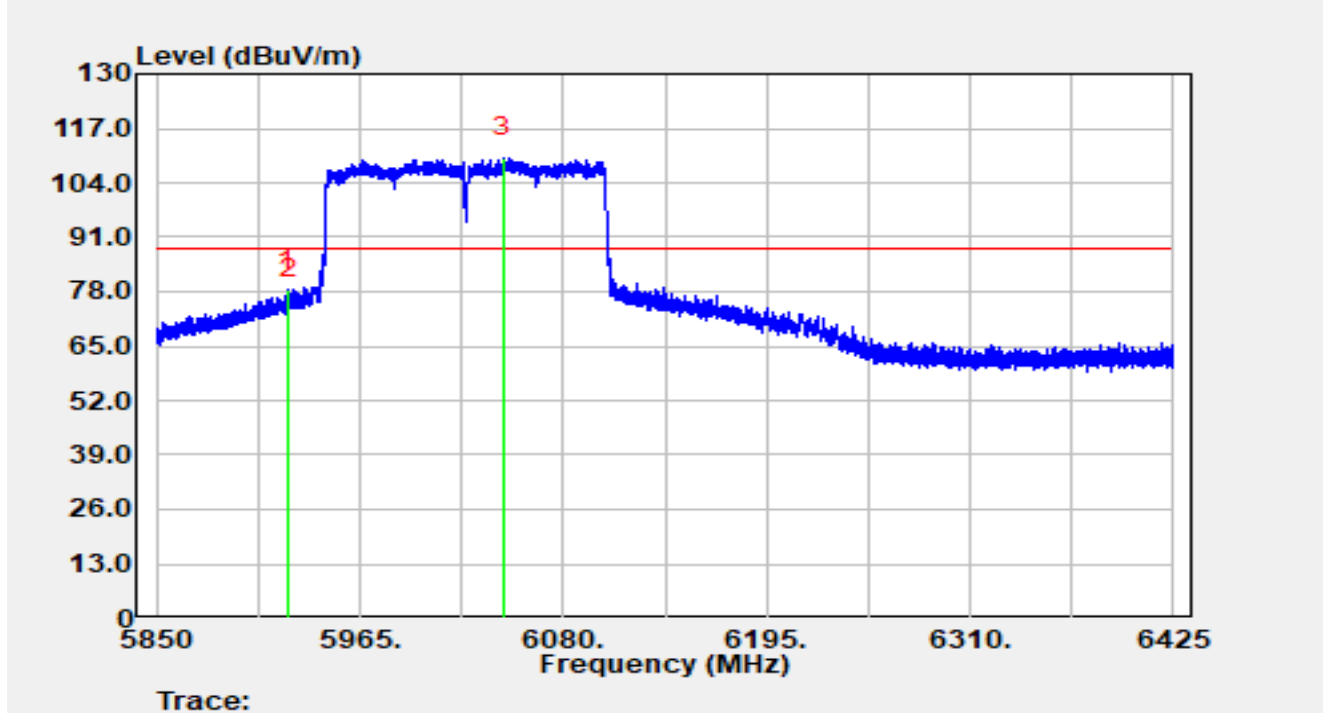


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5924.348	85.81	-7.52	78.29	-9.91	88.20	Peak
2		5925.000	83.61	-7.51	76.10	-12.10	88.20	Peak
3		6046.190	117.63	-7.72	109.91	N/A	N/A	Peak

Notes:

1. “ * “, means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-06-24
Temperature	23.8 °C	Humidity	61.1%
Limit	FCC_Part 15_Band Edge(3 m)_6G	Test Engineer	Mero Zhou
Factor	BBHA 9120D_02042	Polarity	Vertical
EUT	ACCESS POINT	Test Voltage	By PoE
Test Mode	Transmit by 802.11be-EHT160 at 6025 MHz		

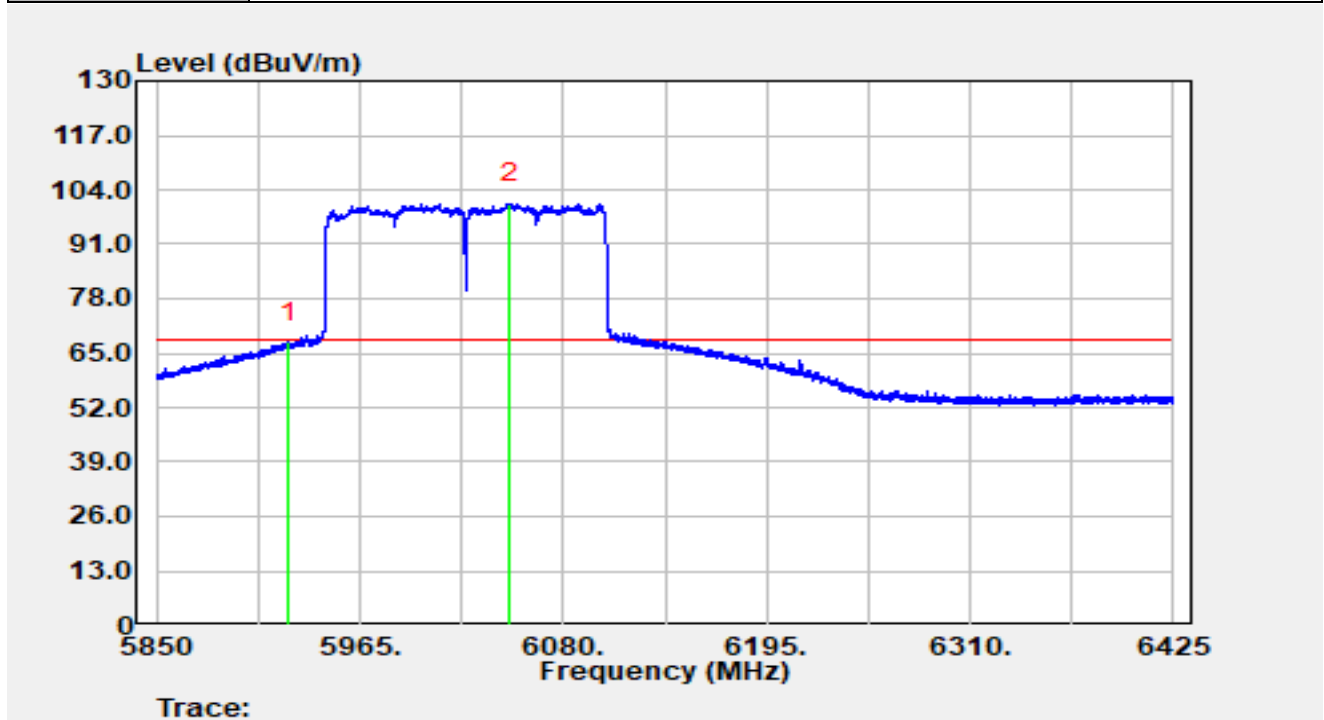


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5925.000	75.04	-7.51	67.52	-0.68	68.20	Average
2		6049.870	108.48	-7.73	100.75	N/A	N/A	Average

Notes:

1. “ * “, means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

4*4 Omni:

Site	SIP-AC3	Test Date	2025-06-24
Temperature	23.8 °C	Humidity	61.1%
Limit	FCC_Part 15_Band Edge(3 m)_6G	Test Engineer	Mero Zhou
Factor	BBHA 9120D_02042	Polarity	Horizontal
EUT	ACCESS POINT	Test Voltage	By PoE
Test Mode	Transmit by 802.11be-EHT20 at 5955 MHz		

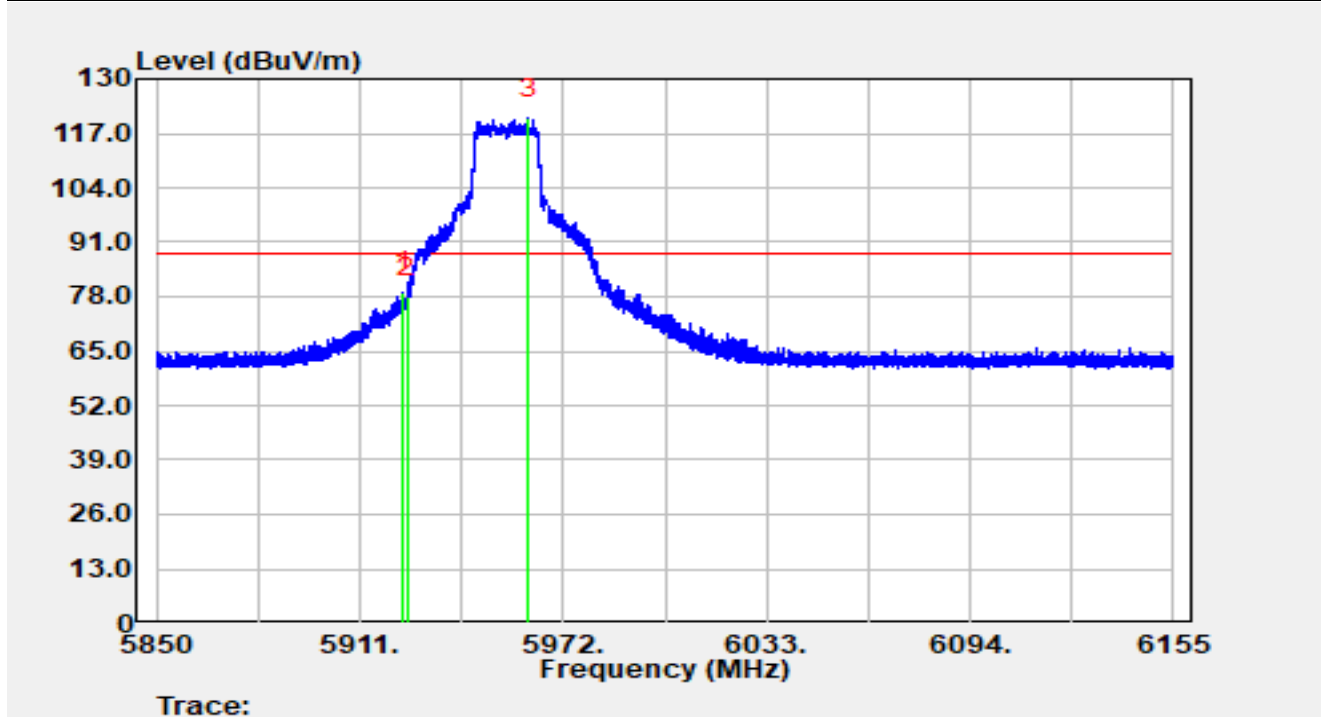


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5924.054	86.74	-7.52	79.22	-8.98	88.20	Peak
2		5925.000	85.43	-7.51	77.92	-10.28	88.20	Peak
3		5961.569	127.95	-7.50	120.45	N/A	N/A	Peak

Notes:

1. “ * “, means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-06-24
Temperature	23.8 °C	Humidity	61.1%
Limit	FCC_Part 15_Band Edge(3 m)_6G	Test Engineer	Mero Zhou
Factor	BBHA 9120D_02042	Polarity	Horizontal
EUT	ACCESS POINT	Test Voltage	By PoE
Test Mode	Transmit by 802.11be-EHT20 at 5955 MHz		

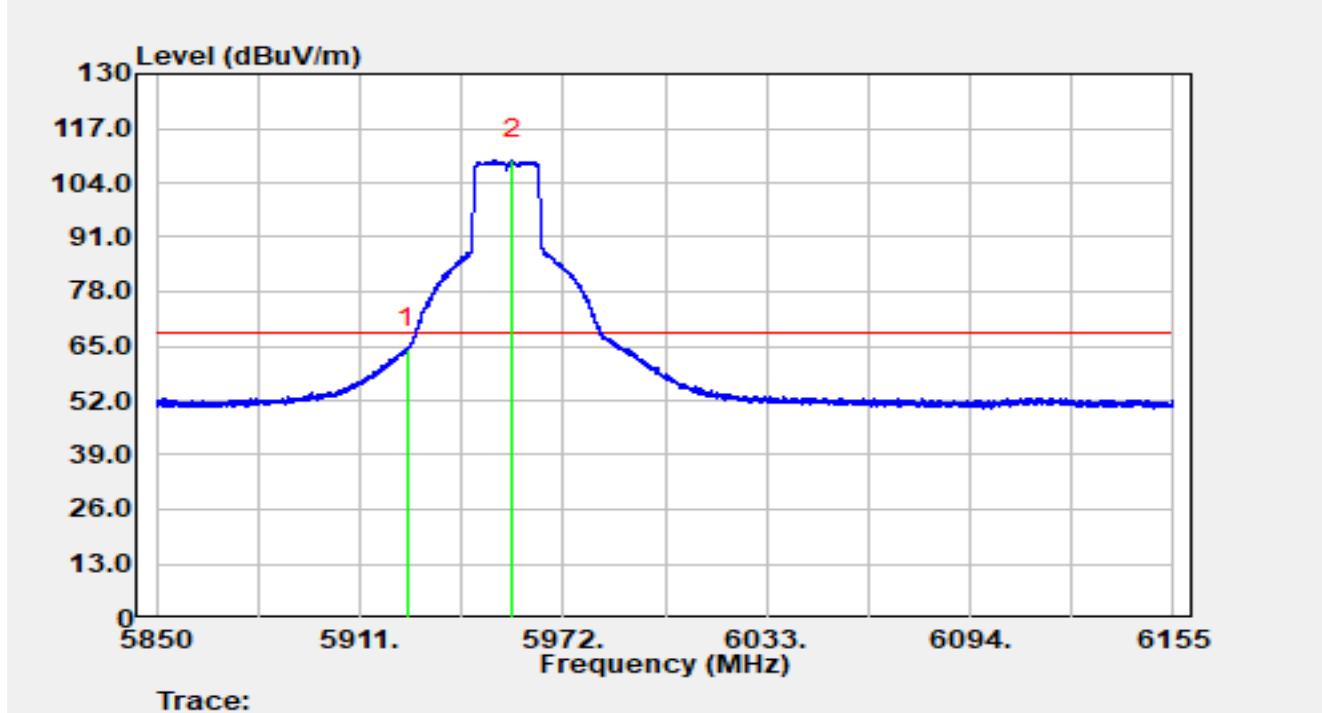


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5925.000	71.88	-7.51	64.36	-3.84	68.20	Average
2		5956.750	116.99	-7.56	109.43	N/A	N/A	Average

Notes:

1. “ * “, means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-06-24
Temperature	23.8 °C	Humidity	61.1%
Limit	FCC_Part 15_Band Edge(3 m)_6G	Test Engineer	Mero Zhou
Factor	BBHA 9120D_02042	Polarity	Vertical
EUT	ACCESS POINT	Test Voltage	By PoE
Test Mode	Transmit by 802.11be-EHT20 at 5955 MHz		

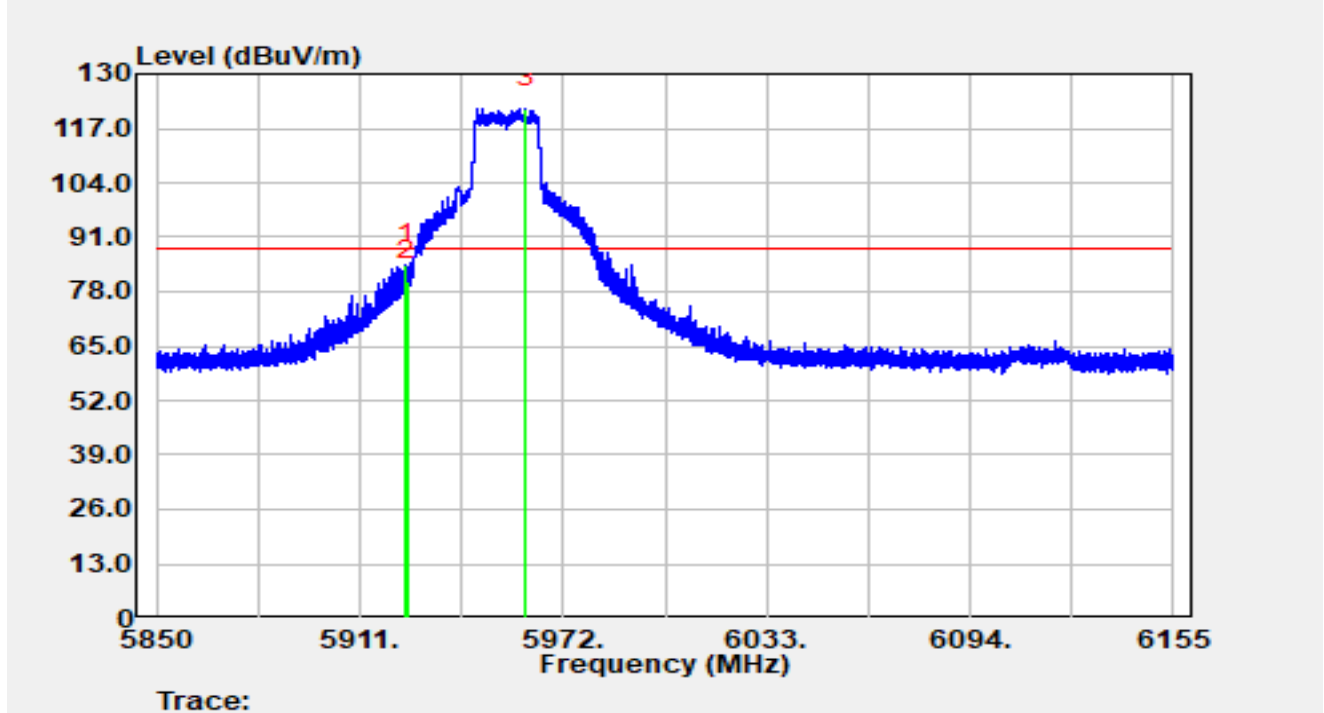

No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5924.725	92.08	-7.52	84.56	-3.64	88.20	Peak
2		5925.000	88.12	-7.51	80.61	-7.59	88.20	Peak
3		5960.715	129.27	-7.51	121.75	N/A	N/A	Peak

Notes:

1. “ * “, means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).