


Site	SIP-AC3	Test Date	2025-06-24
Temperature	23.8 °C	Humidity	61.1%
Limit	FCC_Part 15_Band Edge(3 m)_6G	Test Engineer	Mero Zhou
Factor	BBHA 9120D_02042	Polarity	Vertical
EUT	ACCESS POINT	Test Voltage	By PoE
Test Mode	Transmit by 802.11be-EHT20 at 5955 MHz		

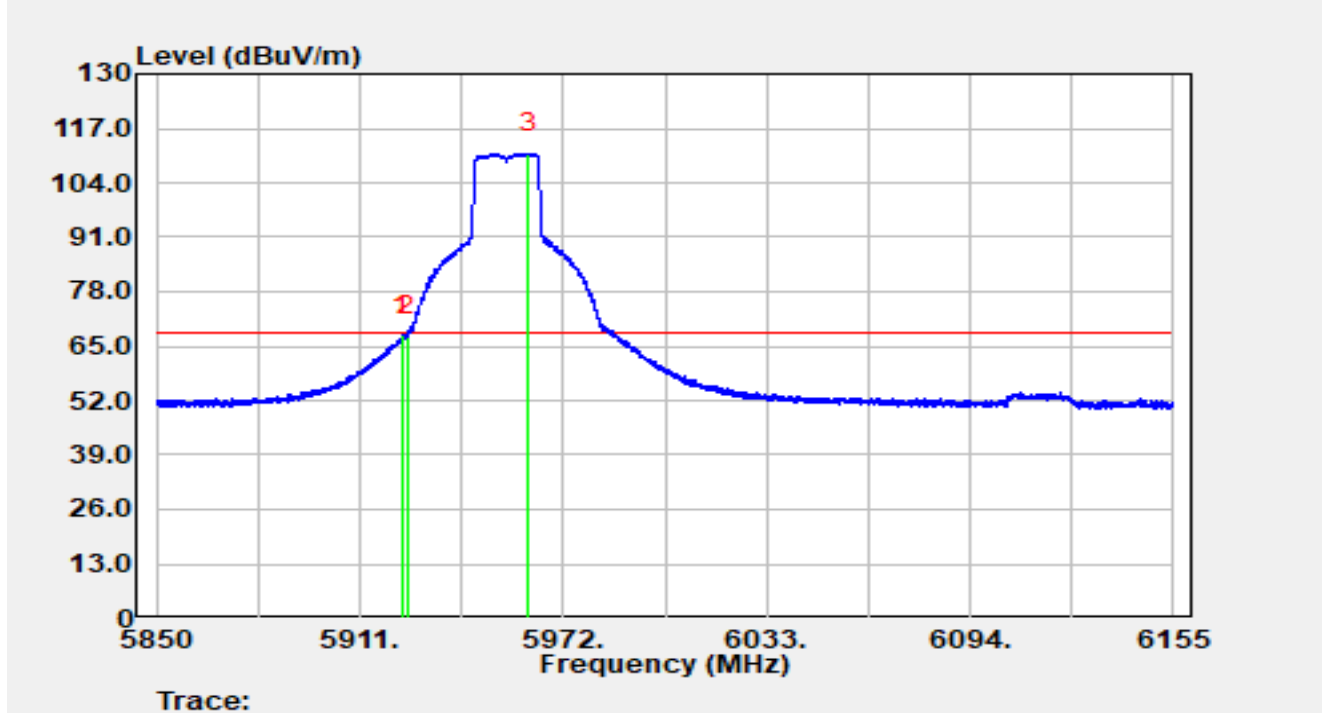


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5923.718	75.18	-7.53	67.65	-0.55	68.20	Average
2		5925.000	74.91	-7.51	67.40	-0.80	68.20	Average
3		5961.478	118.48	-7.51	110.97	N/A	N/A	Average

Notes:

1. “ * “, means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-06-24
Temperature	23.8 °C	Humidity	61.1%
Limit	FCC_Part 15_Band Edge(3 m)_6G	Test Engineer	Mero Zhou
Factor	BBHA 9120D_02042	Polarity	Horizontal
EUT	ACCESS POINT	Test Voltage	By PoE
Test Mode	Transmit by 802.11be-EHT40 at 5965 MHz		

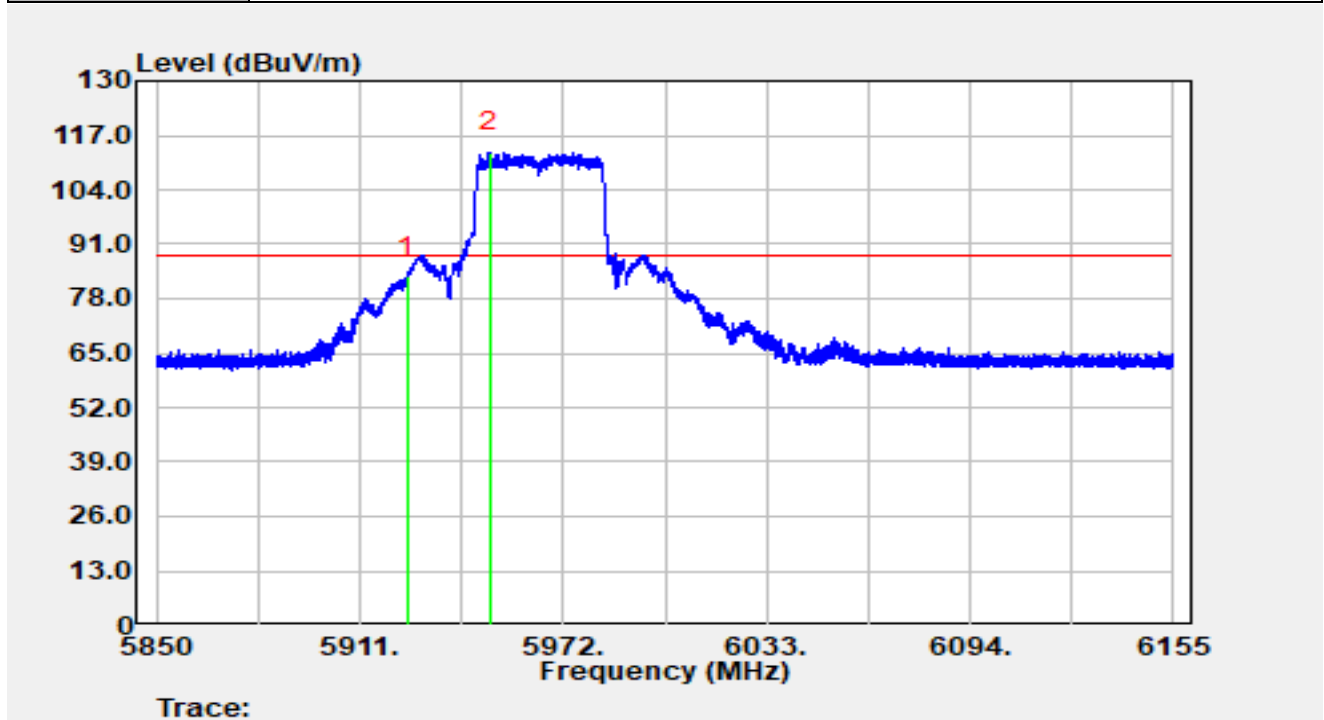


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5925.000	90.71	-7.51	83.20	-5.00	88.20	Peak
2		5949.796	120.61	-7.64	112.98	N/A	N/A	Peak

Notes:

1. “ * “, means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-06-24
Temperature	23.8 °C	Humidity	61.1%
Limit	FCC_Part 15_Band Edge(3 m)_6G	Test Engineer	Mero Zhou
Factor	BBHA 9120D_02042	Polarity	Horizontal
EUT	ACCESS POINT	Test Voltage	By PoE
Test Mode	Transmit by 802.11be-EHT40 at 5965 MHz		

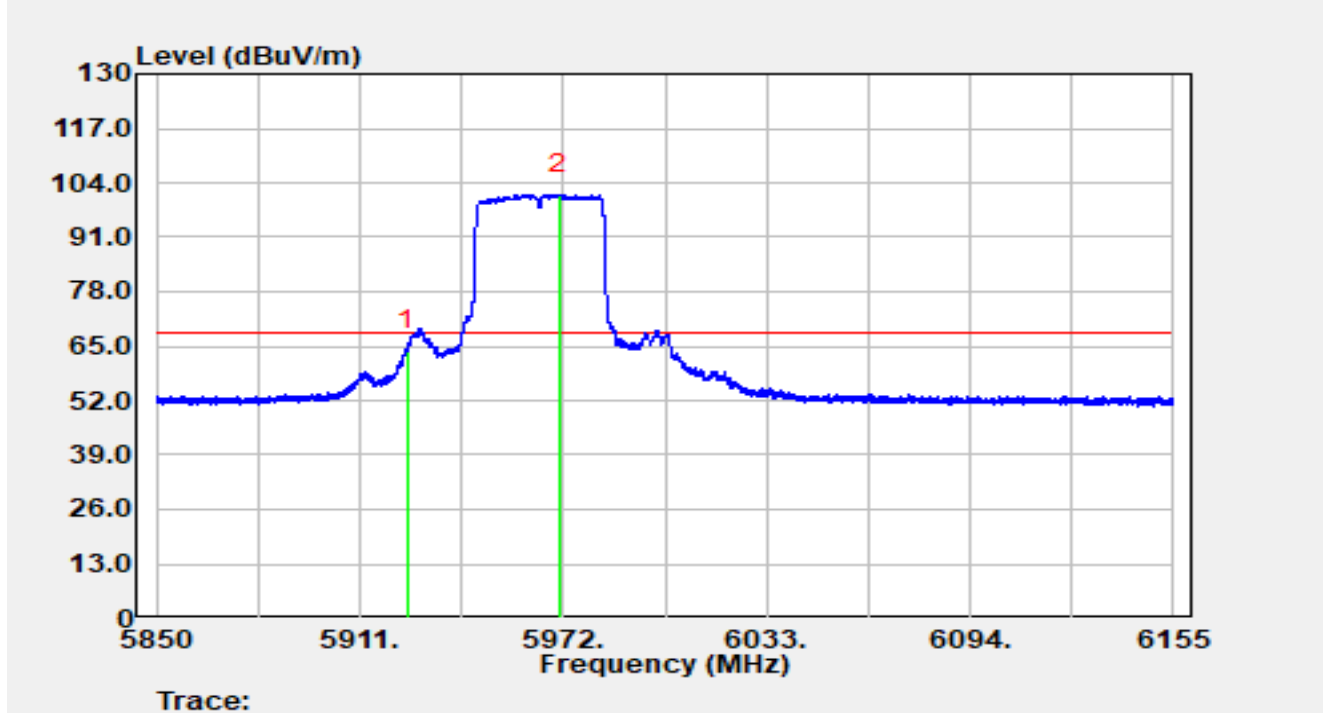


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5925.000	71.30	-7.51	63.79	-4.41	68.20	Average
2		5970.902	108.86	-7.57	101.29	N/A	N/A	Average

Notes:

1. “ * “, means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-06-24
Temperature	23.8 °C	Humidity	61.1%
Limit	FCC_Part 15_Band Edge(3 m)_6G	Test Engineer	Mero Zhou
Factor	BBHA 9120D_02042	Polarity	Vertical
EUT	ACCESS POINT	Test Voltage	By PoE
Test Mode	Transmit by 802.11be-EHT40 at 5965 MHz		

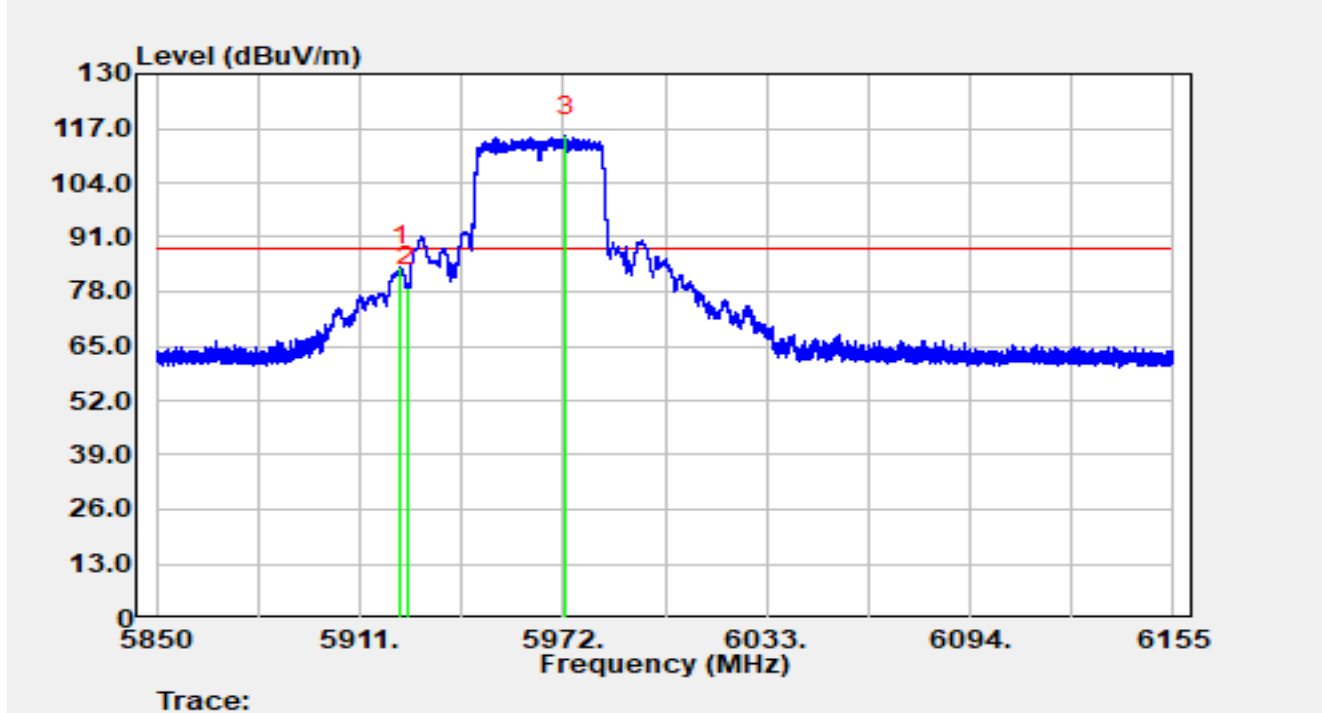


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5923.017	91.58	-7.53	84.05	-4.15	88.20	Peak
2		5925.000	86.66	-7.51	79.14	-9.06	88.20	Peak
3		5972.732	122.70	-7.60	115.10	N/A	N/A	Peak

Notes:

1. “ * “, means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-06-24
Temperature	23.8 °C	Humidity	61.1%
Limit	FCC_Part 15_Band Edge(3 m)_6G	Test Engineer	Mero Zhou
Factor	BBHA 9120D_02042	Polarity	Vertical
EUT	ACCESS POINT	Test Voltage	By PoE
Test Mode	Transmit by 802.11be-EHT40 at 5965 MHz		

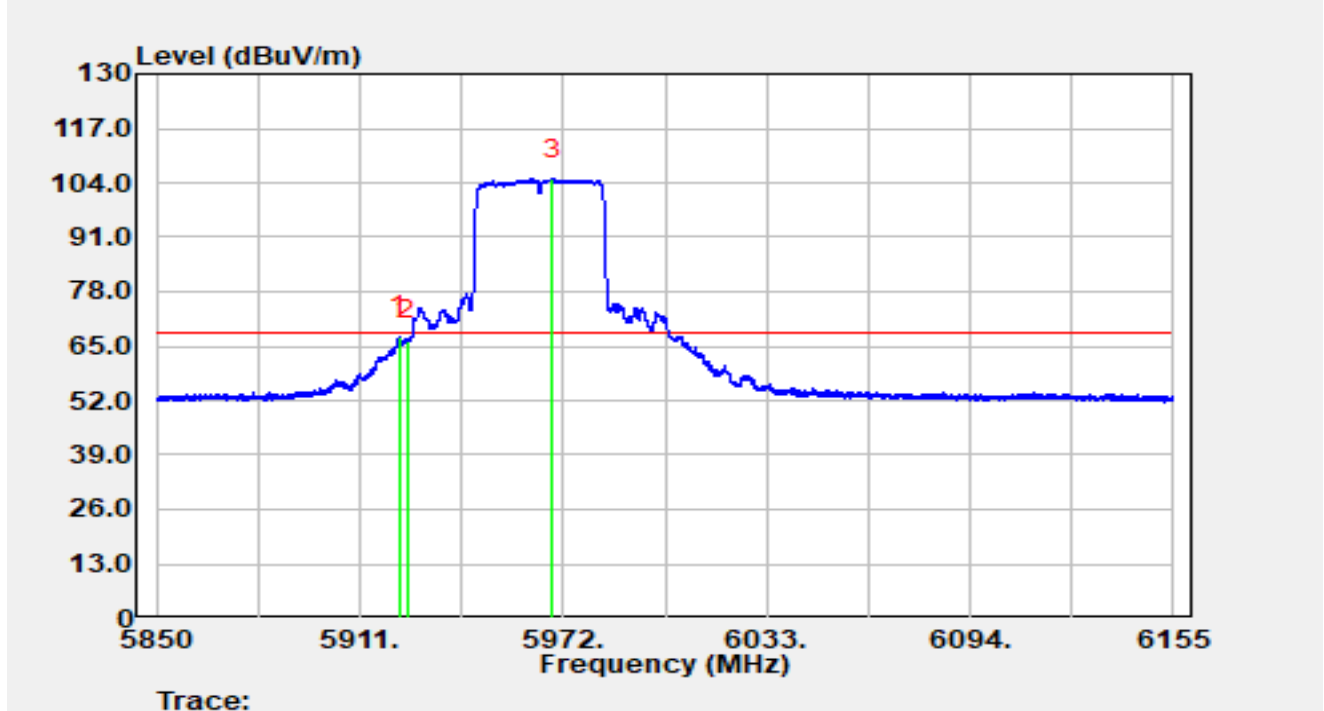


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5922.956	74.87	-7.53	67.34	-0.86	68.20	Average
2		5925.000	73.94	-7.51	66.43	-1.77	68.20	Average
3		5968.706	112.52	-7.54	104.98	N/A	N/A	Average

Notes:

1. “ * “, means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-06-24
Temperature	23.8 °C	Humidity	61.1%
Limit	FCC_Part 15_Band Edge(3 m)_6G	Test Engineer	Mero Zhou
Factor	BBHA 9120D_02042	Polarity	Horizontal
EUT	ACCESS POINT	Test Voltage	By PoE
Test Mode	Transmit by 802.11be-EHT80 at 5985 MHz		

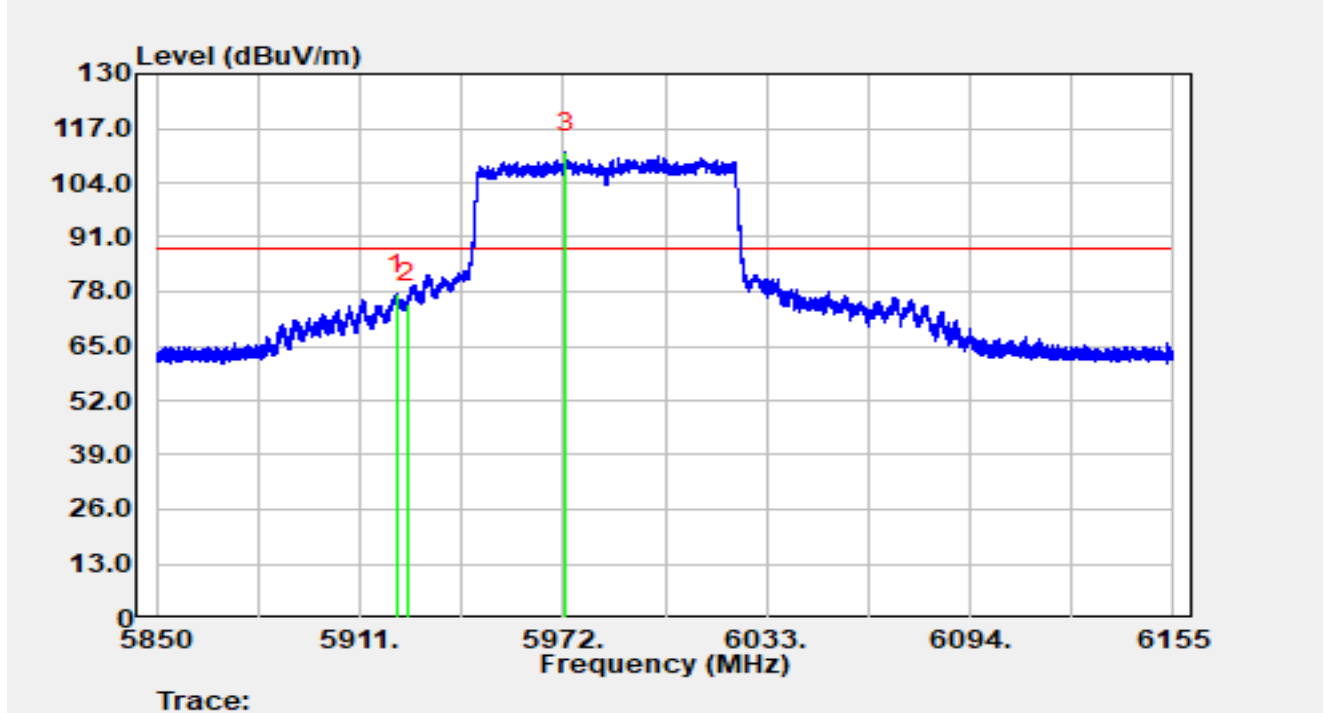


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5921.919	84.96	-7.54	77.42	-10.78	88.20	Peak
2		5925.000	82.64	-7.51	75.12	-13.08	88.20	Peak
3		5972.549	118.73	-7.59	111.13	N/A	N/A	Peak

Notes:

1. “ * “, means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-06-24
Temperature	23.8 °C	Humidity	61.1%
Limit	FCC_Part 15_Band Edge(3 m)_6G	Test Engineer	Mero Zhou
Factor	BBHA 9120D_02042	Polarity	Horizontal
EUT	ACCESS POINT	Test Voltage	By PoE
Test Mode	Transmit by 802.11be-EHT80 at 5985 MHz		

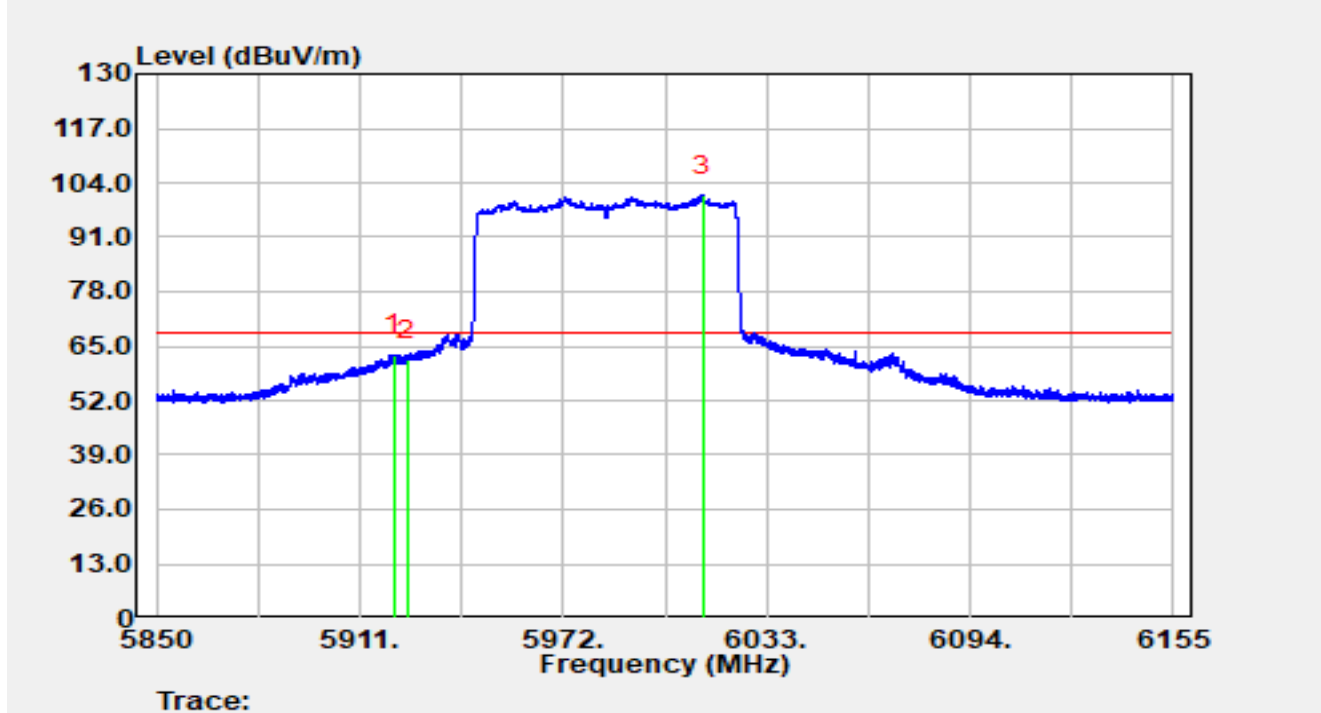


No	Mark	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Detector
1	*	5921.248	70.51	-7.55	62.96	-5.24	68.20	Average
2		5925.000	69.13	-7.51	61.62	-6.58	68.20	Average
3		6013.693	108.45	-7.56	100.89	N/A	N/A	Average

Notes:

1. “ * “, means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) - AMP (dB).
3. Measurement (dBUV/m) = Reading (dBUV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-06-24
Temperature	23.8 °C	Humidity	61.1%
Limit	FCC_Part 15_Band Edge(3 m)_6G	Test Engineer	Mero Zhou
Factor	BBHA 9120D_02042	Polarity	Vertical
EUT	ACCESS POINT	Test Voltage	By PoE
Test Mode	Transmit by 802.11be-EHT80 at 5985 MHz		

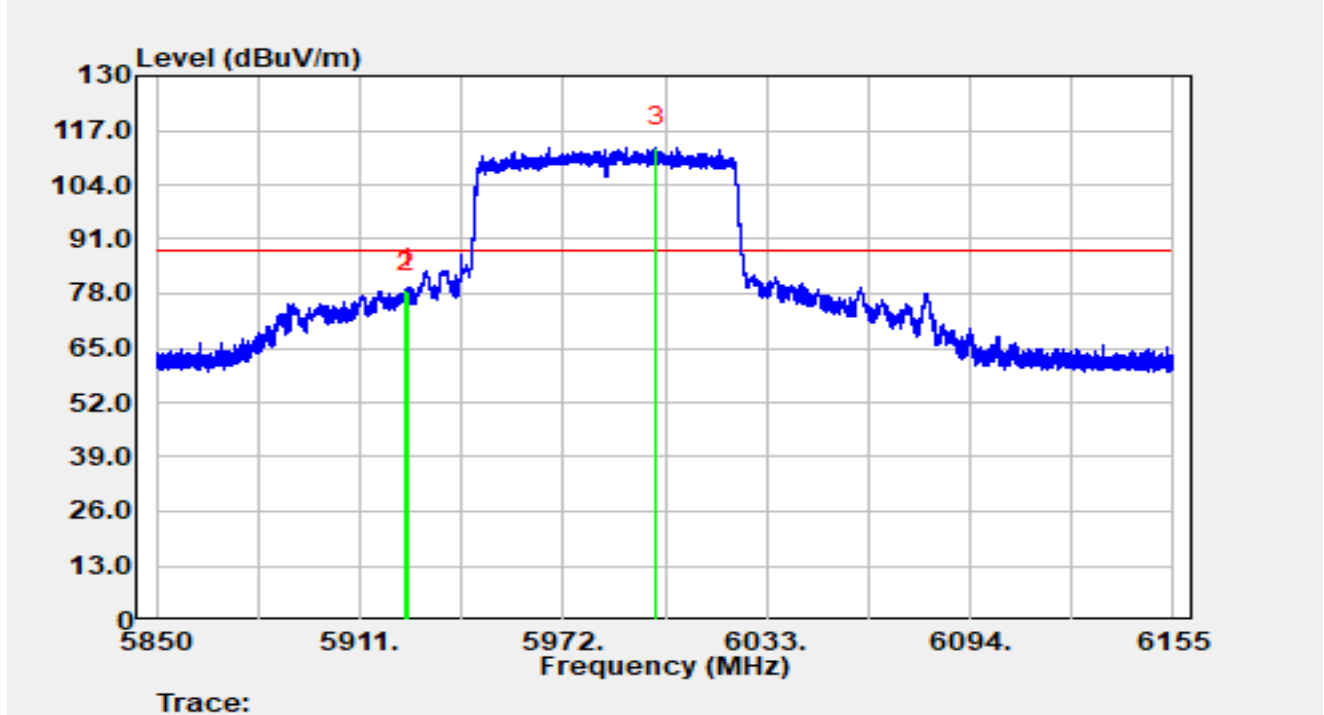


No	Mark	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Detector
1	*	5924.847	86.66	-7.52	79.14	-9.06	88.20	Peak
2		5925.000	85.87	-7.51	78.36	-9.84	88.20	Peak
3		5999.786	120.48	-7.52	112.96	N/A	N/A	Peak

Notes:

1. “ * “, means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) - AMP (dB).
3. Measurement (dBUV/m) = Reading (dBUV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-06-24
Temperature	23.8 °C	Humidity	61.1%
Limit	FCC_Part 15_Band Edge(3 m)_6G	Test Engineer	Mero Zhou
Factor	BBHA 9120D_02042	Polarity	Vertical
EUT	ACCESS POINT	Test Voltage	By PoE
Test Mode	Transmit by 802.11be-EHT80 at 5985 MHz		

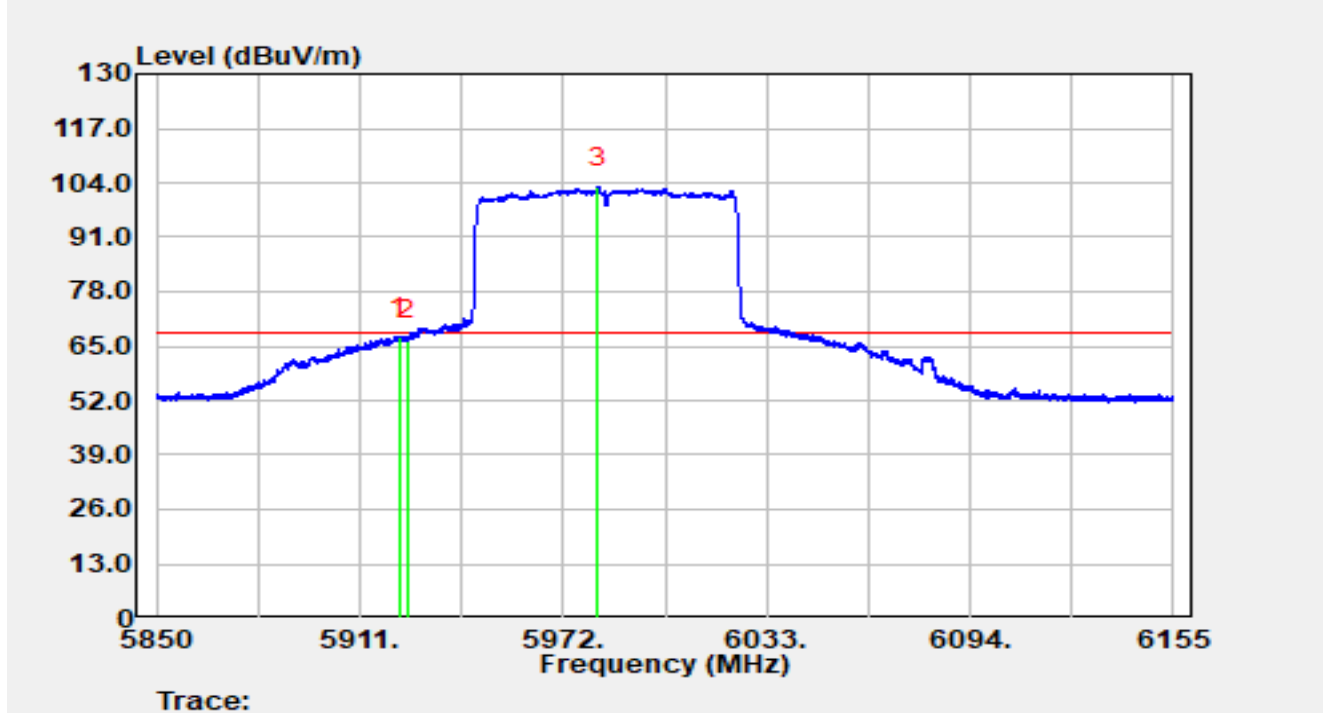


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5922.682	74.74	-7.54	67.20	-1.00	68.20	Average
2		5925.000	73.96	-7.51	66.45	-1.75	68.20	Average
3		5982.431	110.54	-7.69	102.85	N/A	N/A	Average

Notes:

1. “ * “, means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-06-24
Temperature	23.8 °C	Humidity	61.1%
Limit	FCC_Part 15_Band Edge(3 m)_6G	Test Engineer	Mero Zhou
Factor	BBHA 9120D_02042	Polarity	Horizontal
EUT	ACCESS POINT	Test Voltage	By PoE
Test Mode	Transmit by 802.11be-EHT160 at 6025 MHz		

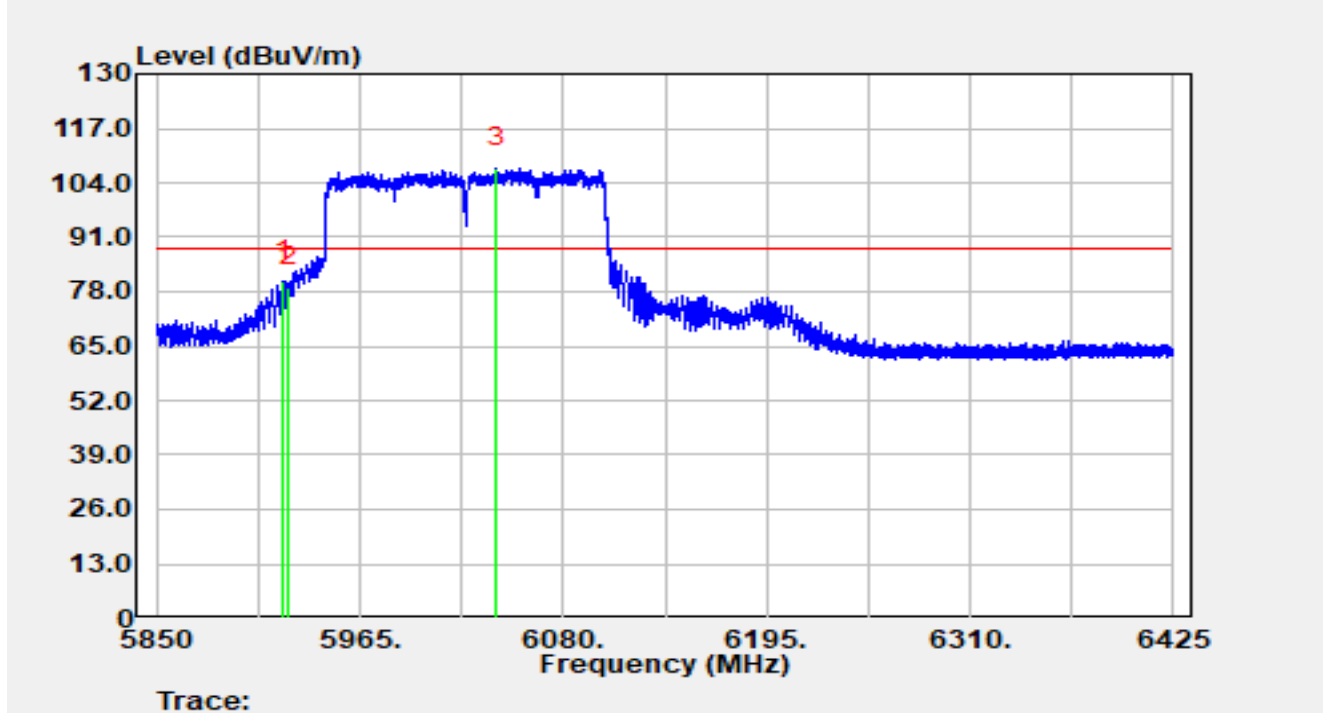


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5921.875	88.06	-7.54	80.52	-7.68	88.20	Peak
2		5925.000	86.67	-7.51	79.16	-9.04	88.20	Peak
3		6041.993	115.19	-7.70	107.49	N/A	N/A	Peak

Notes:

1. “ * “, means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-06-24
Temperature	23.8 °C	Humidity	61.1%
Limit	FCC_Part 15_Band Edge(3 m)_6G	Test Engineer	Mero Zhou
Factor	BBHA 9120D_02042	Polarity	Horizontal
EUT	ACCESS POINT	Test Voltage	By PoE
Test Mode	Transmit by 802.11be-EHT160 at 6025 MHz		

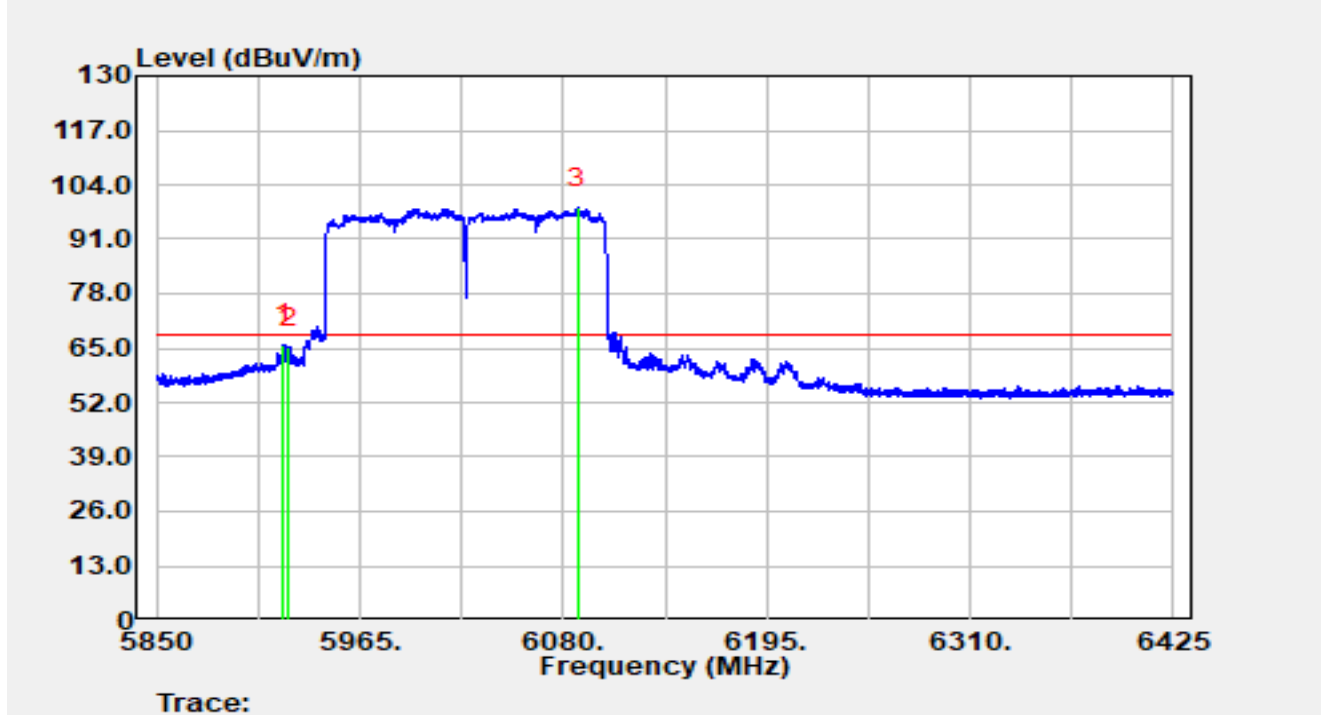


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5921.817	73.52	-7.54	65.97	-2.23	68.20	Average
2		5925.000	72.64	-7.51	65.13	-3.07	68.20	Average
3		6088.510	105.93	-7.55	98.38	N/A	N/A	Average

Notes:

1. “ * “, means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-06-24
Temperature	23.8 °C	Humidity	61.1%
Limit	FCC_Part 15_Band Edge(3 m)_6G	Test Engineer	Mero Zhou
Factor	BBHA 9120D_02042	Polarity	Vertical
EUT	ACCESS POINT	Test Voltage	By PoE
Test Mode	Transmit by 802.11be-EHT160 at 6025 MHz		

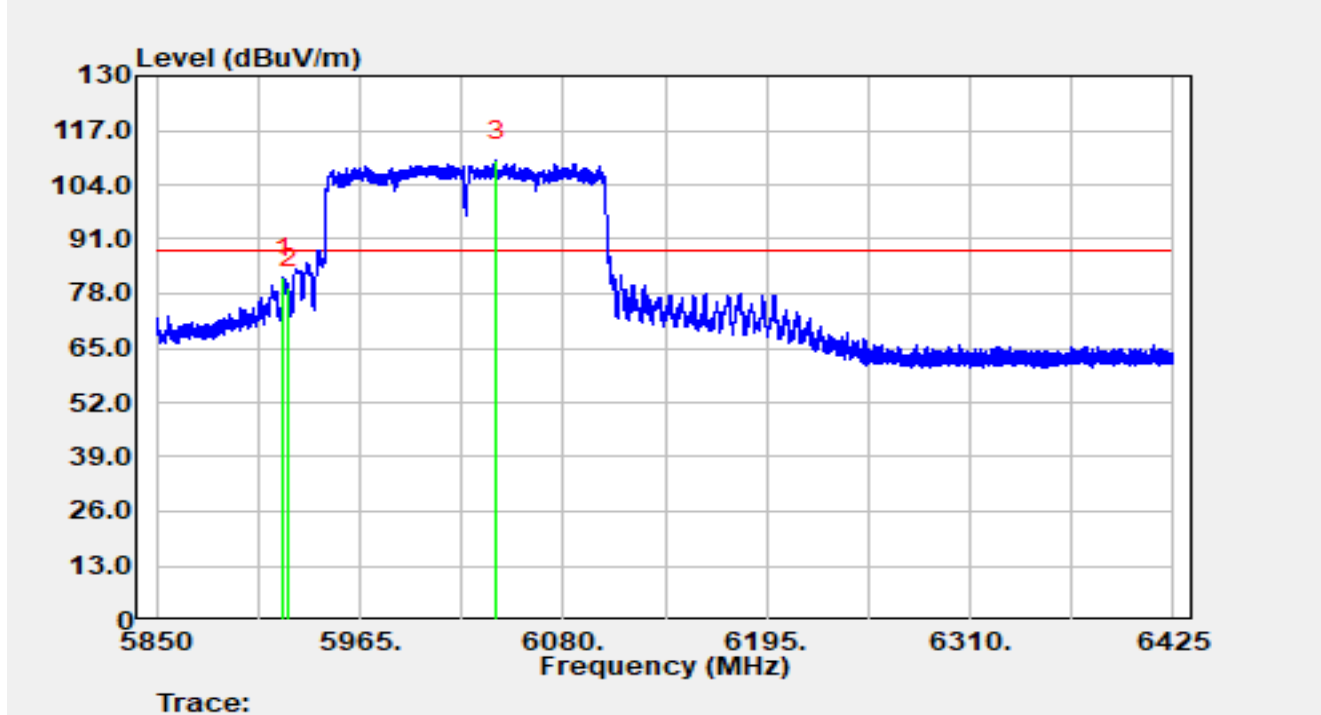


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5921.817	89.47	-7.54	81.92	-6.28	88.20	Peak
2		5925.000	86.95	-7.51	79.43	-8.77	88.20	Peak
3		6042.567	117.52	-7.70	109.82	N/A	N/A	Peak

Notes:

1. “ * “, means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-06-24
Temperature	23.8 °C	Humidity	61.1%
Limit	FCC_Part 15_Band Edge(3 m)_6G	Test Engineer	Mero Zhou
Factor	BBHA 9120D_02042	Polarity	Vertical
EUT	ACCESS POINT	Test Voltage	By PoE
Test Mode	Transmit by 802.11be-EHT160 at 6025 MHz		

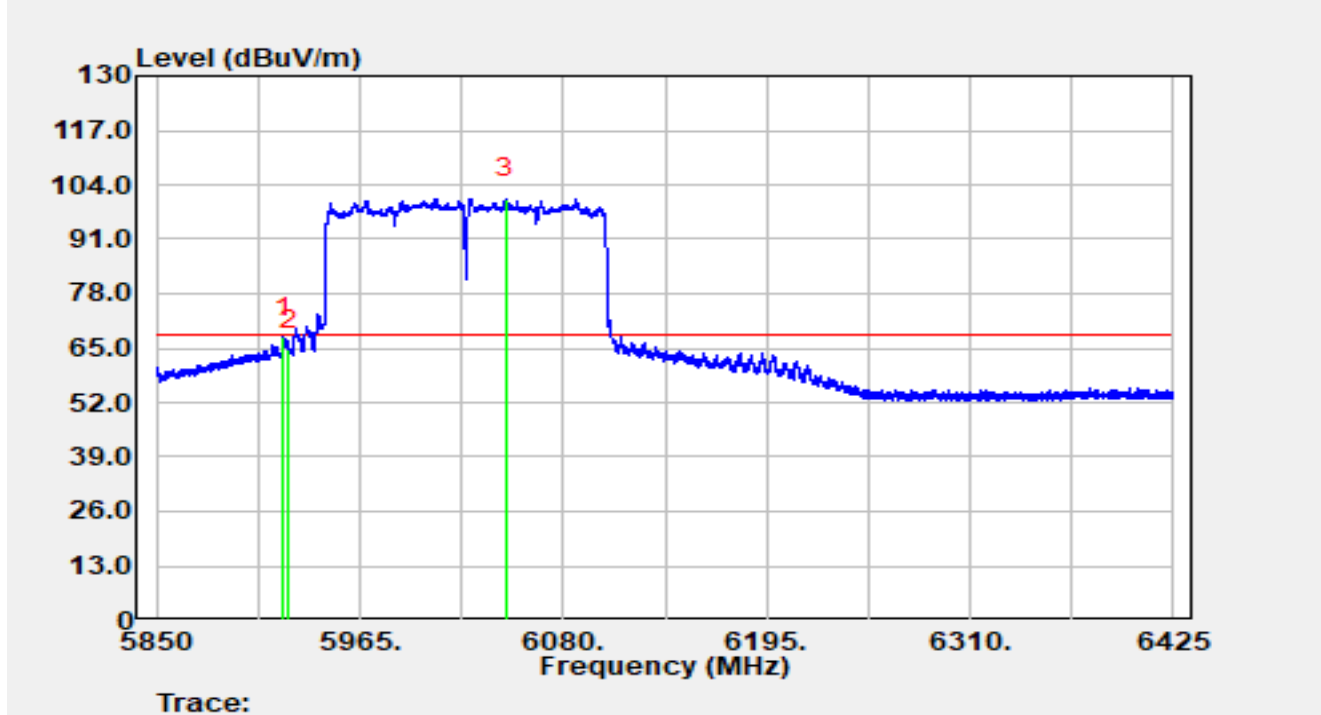


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5921.875	75.09	-7.54	67.55	-0.65	68.20	Average
2		5925.000	72.18	-7.51	64.67	-3.53	68.20	Average
3		6047.513	108.38	-7.73	100.66	N/A	N/A	Average

Notes:

1. “ * “, means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

4*4 Directional:

Site	SIP-AC3	Test Date	2025-06-24
Temperature	23.8 °C	Humidity	61.1%
Limit	FCC_Part 15_Band Edge(3 m)_6G	Test Engineer	Mero Zhou
Factor	BBHA 9120D_02042	Polarity	Horizontal
EUT	ACCESS POINT	Test Voltage	By PoE
Test Mode	Transmit by 802.11be-EHT20 at 5955MHz		

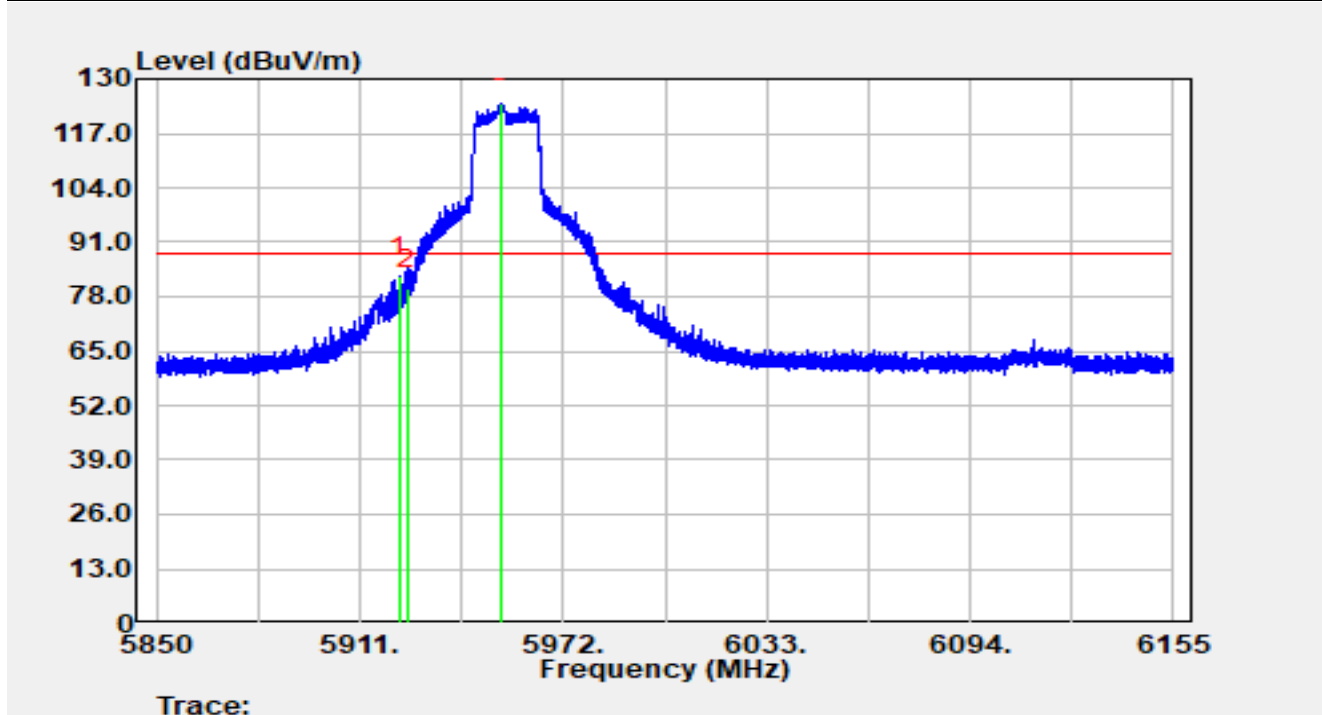


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5922.682	90.31	-7.54	82.77	-5.43	88.20	Peak
2		5925.000	87.37	-7.51	79.86	-8.34	88.20	Peak
3		5953.151	131.88	-7.60	124.28	N/A	N/A	Peak

Notes:

1. “ * “, means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-06-24
Temperature	23.8 °C	Humidity	61.1%
Limit	FCC_Part 15_Band Edge(3 m)_6G	Test Engineer	Mero Zhou
Factor	BBHA 9120D_02042	Polarity	Horizontal
EUT	ACCESS POINT	Test Voltage	By PoE
Test Mode	Transmit by 802.11be-EHT20 at 5955MHz		

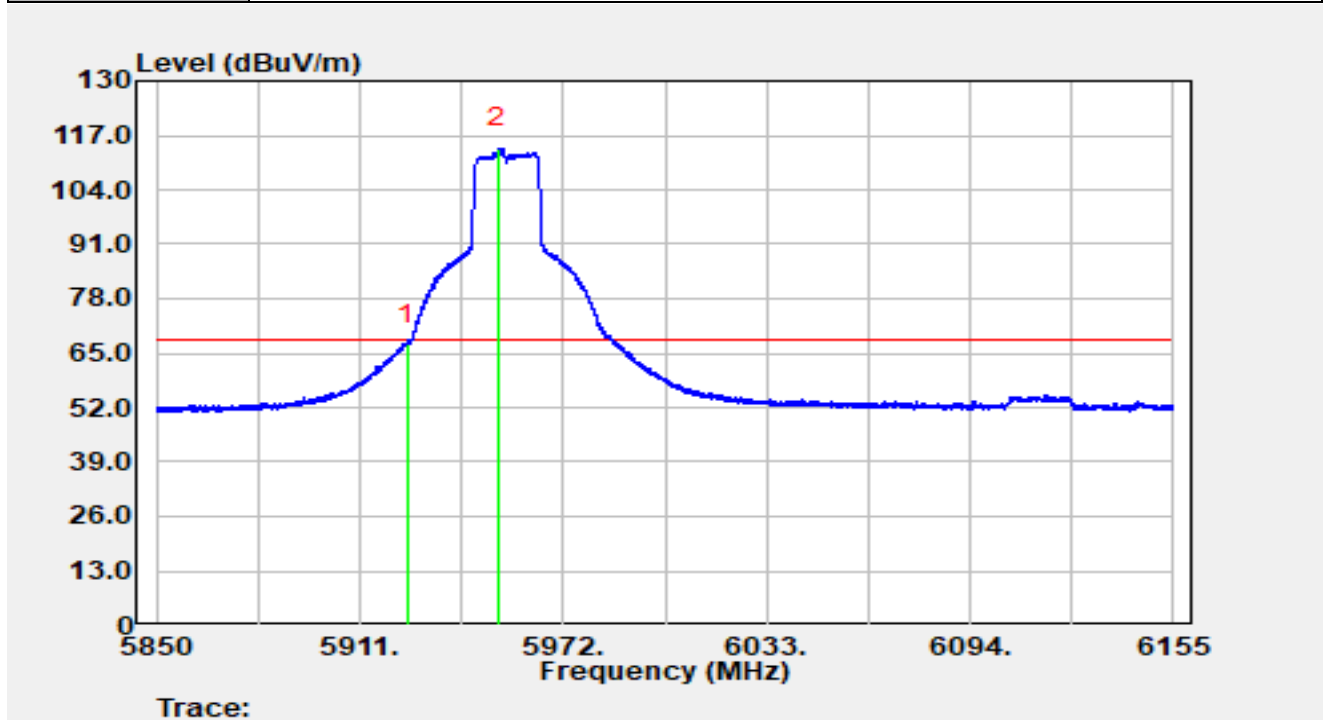


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5925.000	74.58	-7.51	67.06	-1.14	68.20	Average
2		5952.389	121.47	-7.61	113.87	N/A	N/A	Average

Notes:

1. “ * “, means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-06-24
Temperature	23.8 °C	Humidity	61.1%
Limit	FCC_Part 15_Band Edge(3 m)_6G	Test Engineer	Mero Zhou
Factor	BBHA 9120D_02042	Polarity	Vertical
EUT	ACCESS POINT	Test Voltage	By PoE
Test Mode	Transmit by 802.11be-EHT20 at 5955MHz		

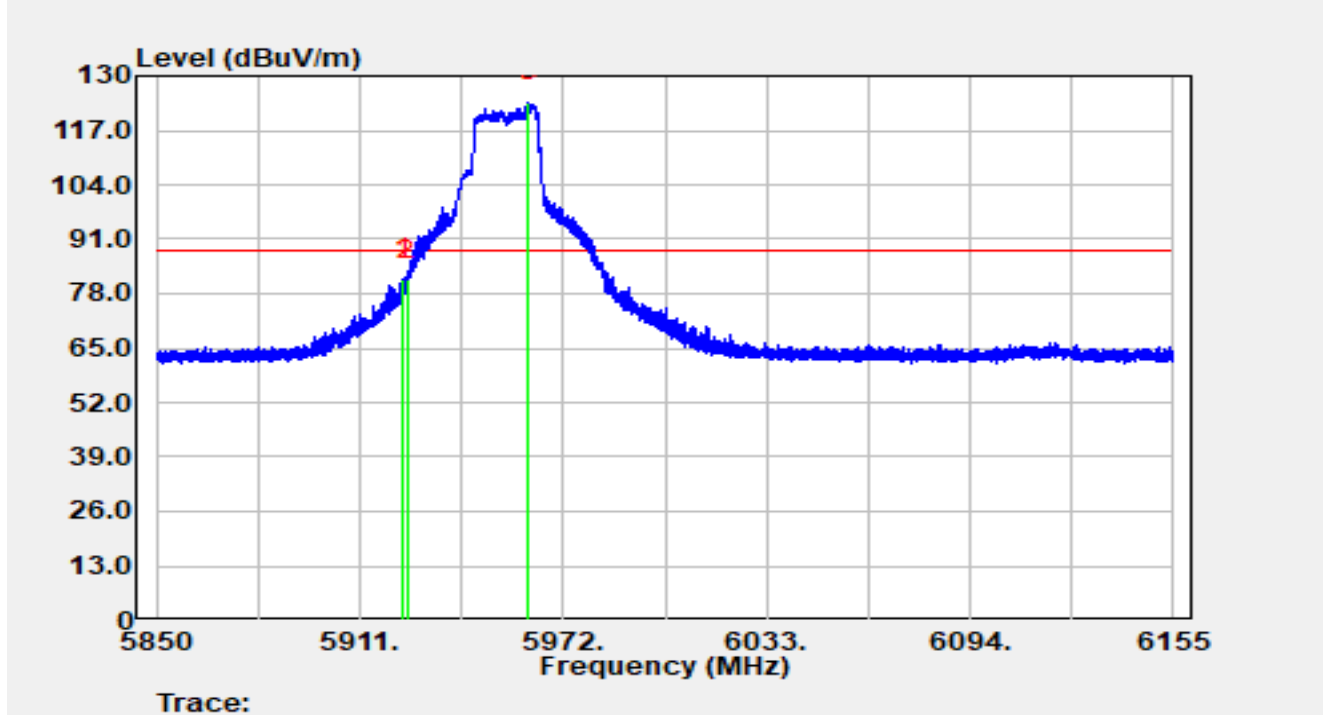


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5923.871	89.11	-7.53	81.58	-6.62	88.20	Peak
2		5925.000	88.83	-7.51	81.31	-6.89	88.20	Peak
3		5961.478	131.28	-7.51	123.77	N/A	N/A	Peak

Notes:

1. “ * “, means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-06-24
Temperature	23.8 °C	Humidity	61.1%
Limit	FCC_Part 15_Band Edge(3 m)_6G	Test Engineer	Mero Zhou
Factor	BBHA 9120D_02042	Polarity	Vertical
EUT	ACCESS POINT	Test Voltage	By PoE
Test Mode	Transmit by 802.11be-EHT20 at 5955MHz		

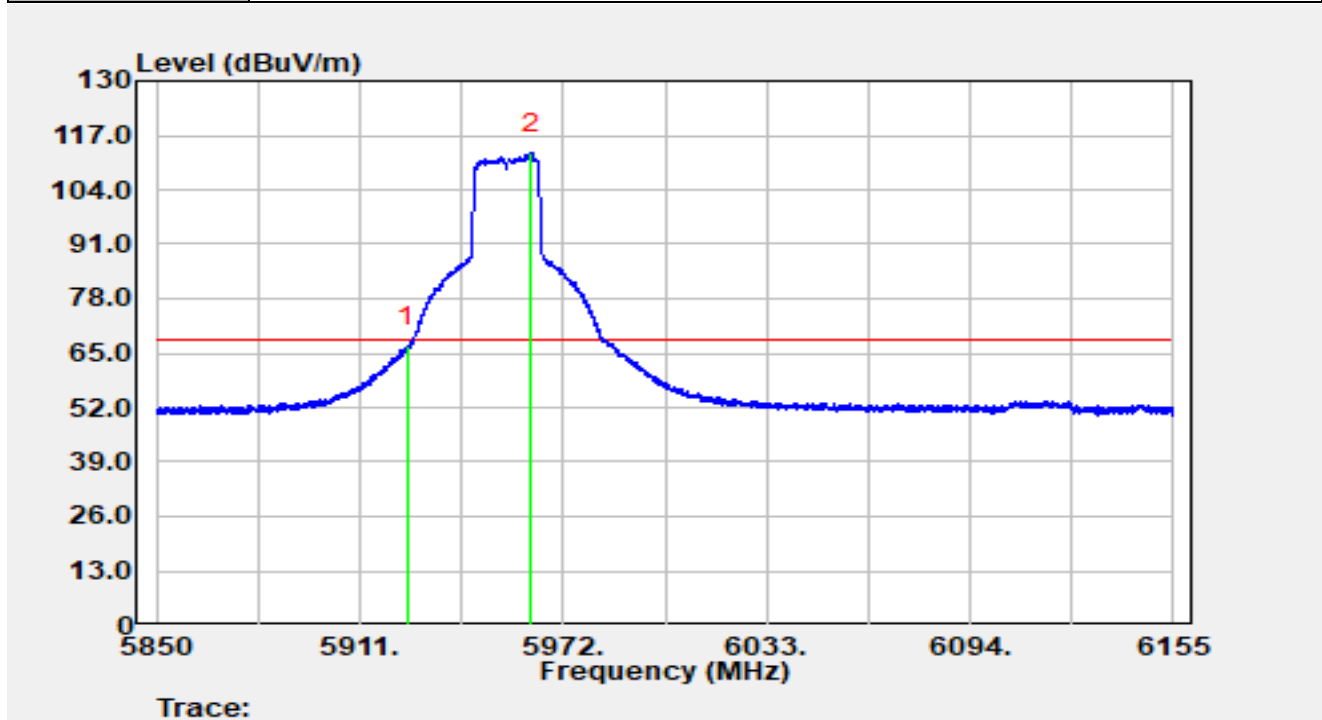


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5925.000	73.99	-7.51	66.47	-1.73	68.20	Average
2		5962.362	120.28	-7.50	112.79	N/A	N/A	Average

Notes:

1. “ * “, means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-06-24
Temperature	23.8 °C	Humidity	61.1%
Limit	FCC_Part 15_Band Edge(3 m)_6G	Test Engineer	Mero Zhou
Factor	BBHA 9120D_02042	Polarity	Horizontal
EUT	ACCESS POINT	Test Voltage	By PoE
Test Mode	Transmit by 802.11be-EHT40 at 5965MHz		

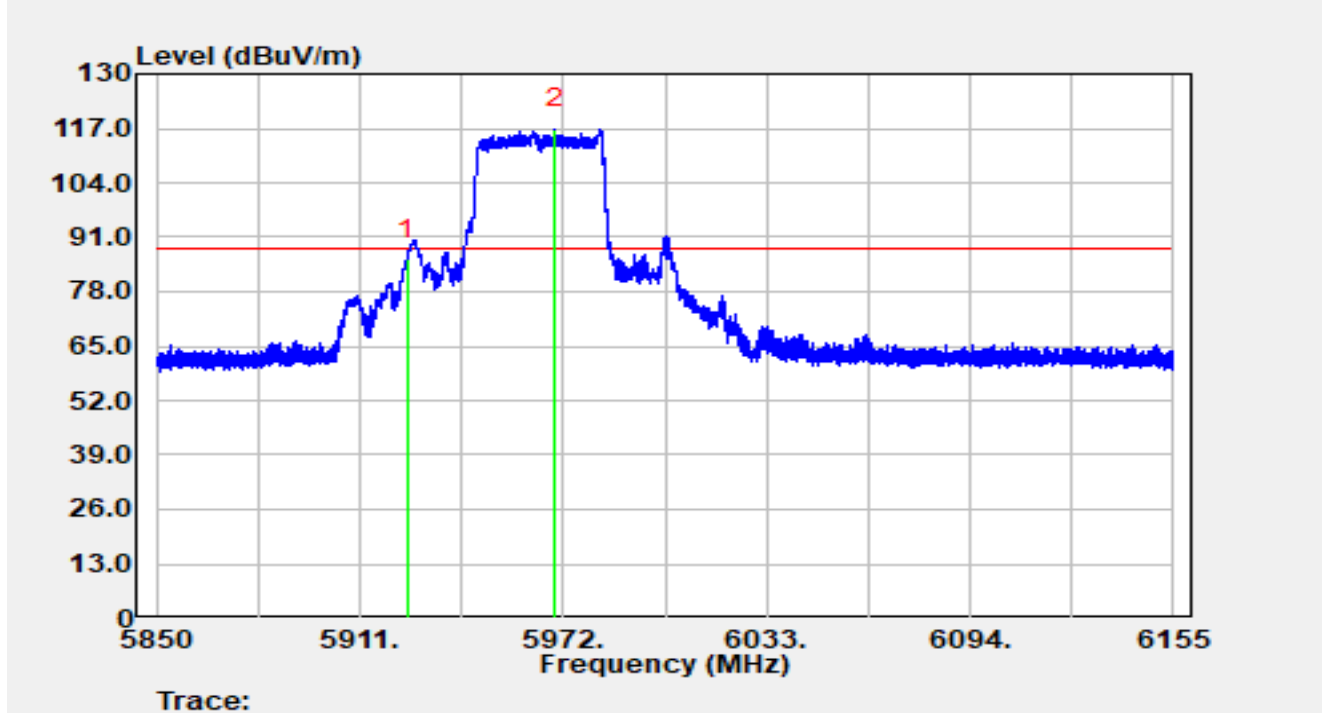


No	Mark	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Detector
1	*	5925.000	93.14	-7.51	85.62	-2.58	88.20	Peak
2		5969.590	124.45	-7.55	116.90	N/A	N/A	Peak

Notes:

1. “ * “, means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) - AMP (dB).
3. Measurement (dBUV/m) = Reading (dBUV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-06-24
Temperature	23.8 °C	Humidity	61.1%
Limit	FCC_Part 15_Band Edge(3 m)_6G	Test Engineer	Mero Zhou
Factor	BBHA 9120D_02042	Polarity	Horizontal
EUT	ACCESS POINT	Test Voltage	By PoE
Test Mode	Transmit by 802.11be-EHT40 at 5965MHz		

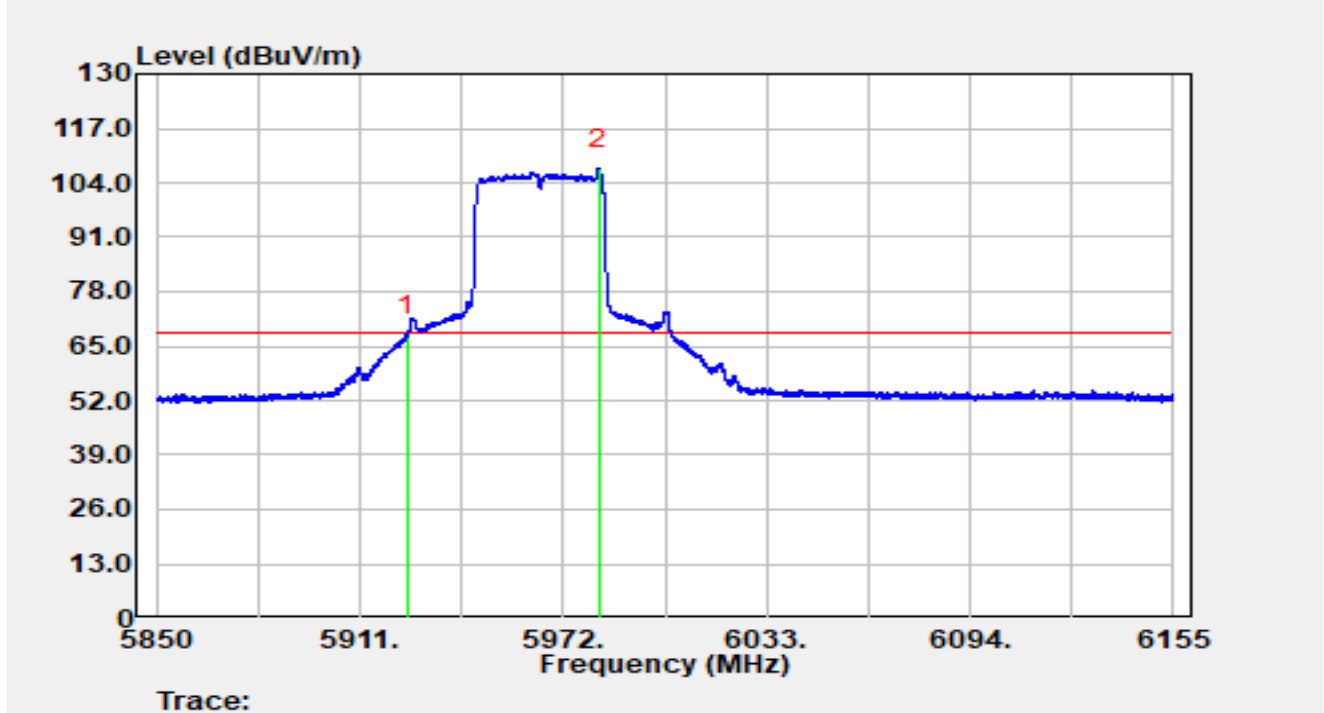


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5925.000	74.79	-7.51	67.28	-0.92	68.20	Average
2		5982.675	114.99	-7.69	107.30	N/A	N/A	Average

Notes:

1. “ * “, means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-06-24
Temperature	23.8 °C	Humidity	61.1%
Limit	FCC_Part 15_Band Edge(3 m)_6G	Test Engineer	Mero Zhou
Factor	BBHA 9120D_02042	Polarity	Vertical
EUT	ACCESS POINT	Test Voltage	By PoE
Test Mode	Transmit by 802.11be-EHT40 at 5965MHz		

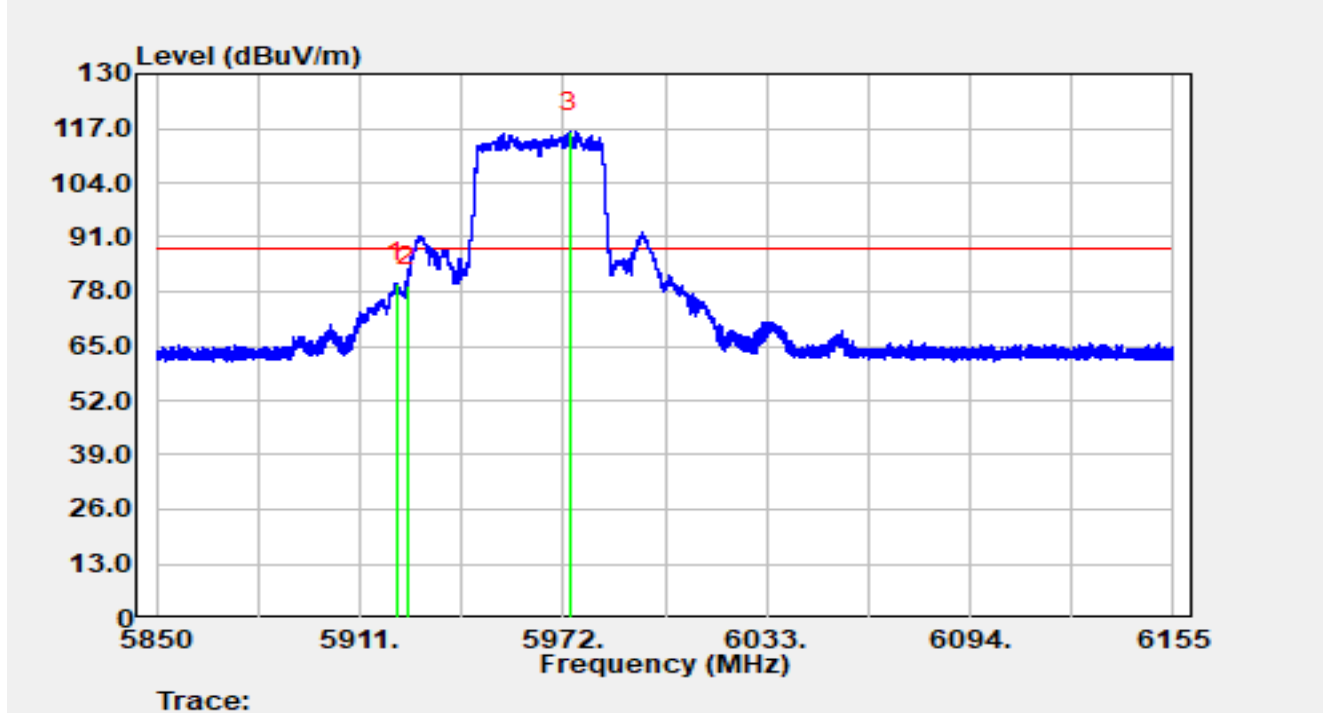


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5921.828	87.74	-7.54	80.19	-8.01	88.20	Peak
2		5925.000	86.84	-7.51	79.33	-8.87	88.20	Peak
3		5973.738	123.86	-7.61	116.25	N/A	N/A	Peak

Notes:

1. “ * “, means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-06-24
Temperature	23.8 °C	Humidity	61.1%
Limit	FCC_Part 15_Band Edge(3 m)_6G	Test Engineer	Mero Zhou
Factor	BBHA 9120D_02042	Polarity	Vertical
EUT	ACCESS POINT	Test Voltage	By PoE
Test Mode	Transmit by 802.11be-EHT40 at 5965MHz		

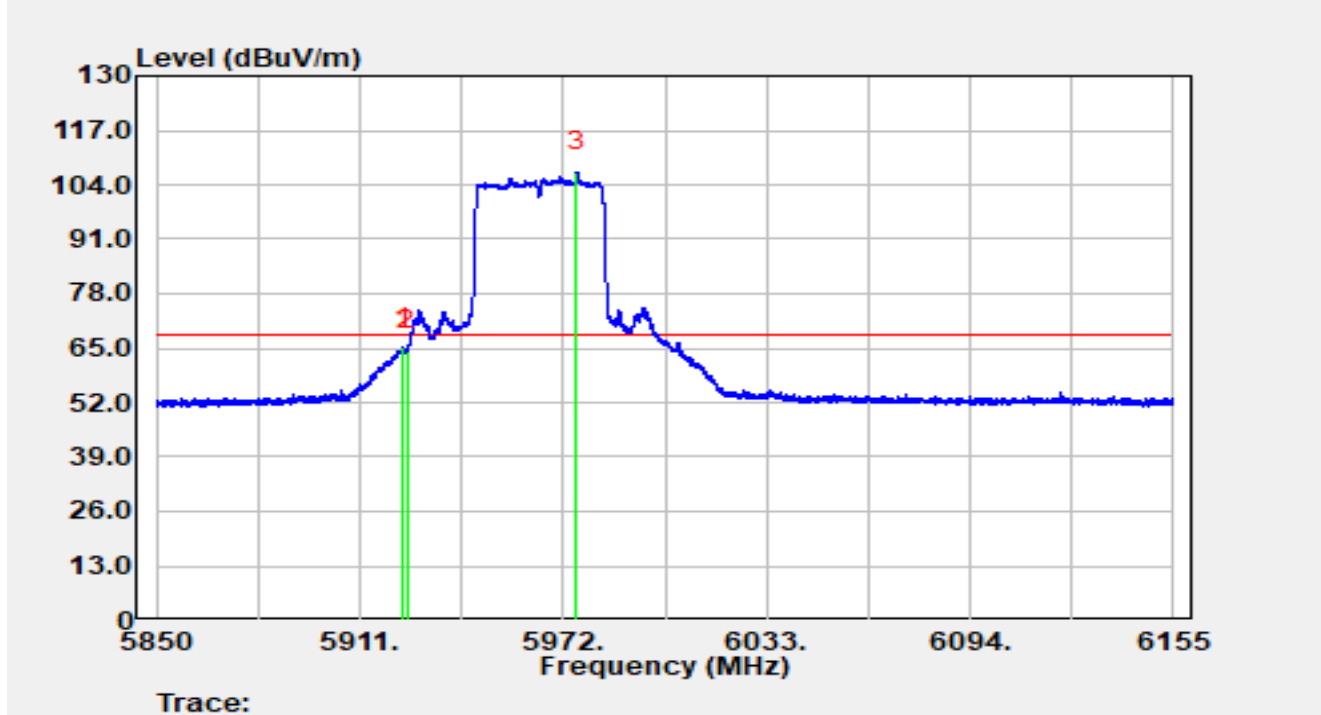


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5924.023	72.64	-7.52	65.11	-3.09	68.20	Average
2		5925.000	71.89	-7.51	64.38	-3.82	68.20	Average
3		5976.026	114.62	-7.64	106.98	N/A	N/A	Average

Notes:

1. “ * “, means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-06-24
Temperature	23.8 °C	Humidity	61.1%
Limit	FCC_Part 15_Band Edge(3 m)_6G	Test Engineer	Mero Zhou
Factor	BBHA 9120D_02042	Polarity	Horizontal
EUT	ACCESS POINT	Test Voltage	By PoE
Test Mode	Transmit by 802.11be-EHT80 at 5985MHz		

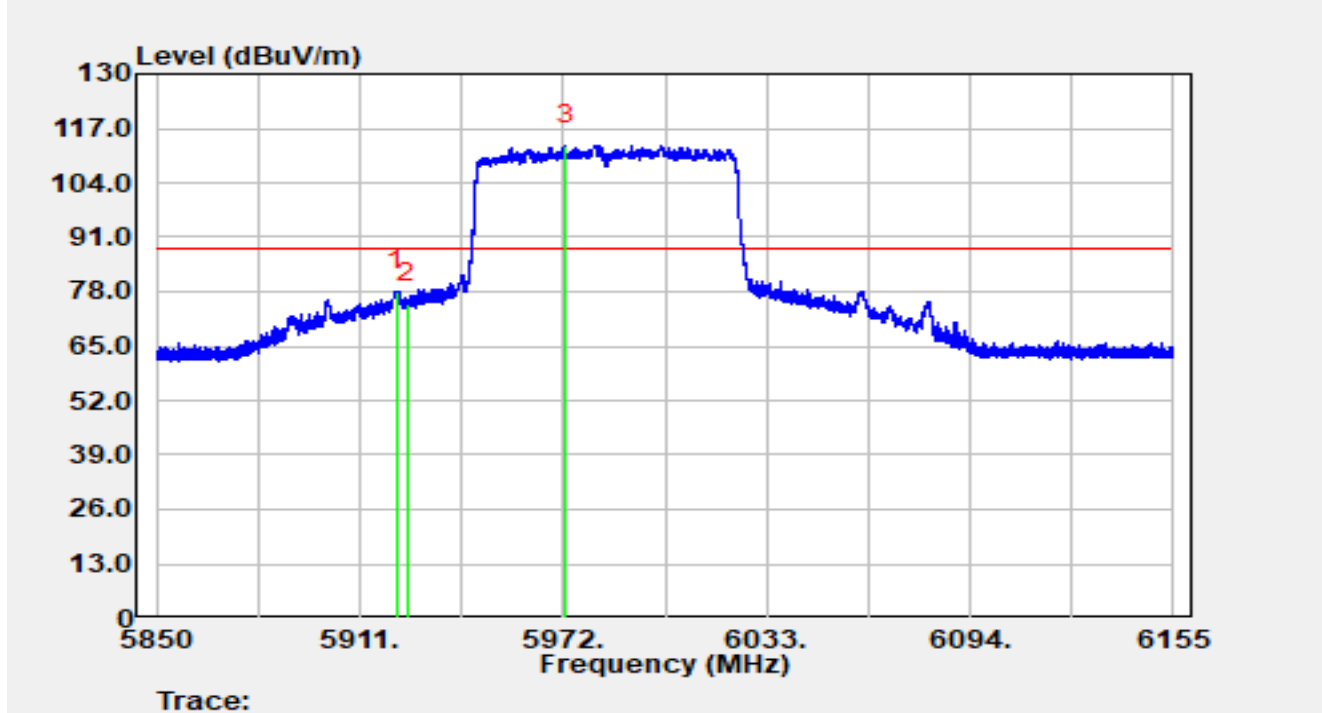


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5921.950	85.75	-7.54	78.21	-9.99	88.20	Peak
2		5925.000	82.57	-7.51	75.06	-13.14	88.20	Peak
3		5972.641	120.55	-7.60	112.95	N/A	N/A	Peak

Notes:

1. “ * “, means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-06-24
Temperature	23.8 °C	Humidity	61.1%
Limit	FCC_Part 15_Band Edge(3 m)_6G	Test Engineer	Mero Zhou
Factor	BBHA 9120D_02042	Polarity	Horizontal
EUT	ACCESS POINT	Test Voltage	By PoE
Test Mode	Transmit by 802.11be-EHT80 at 5985MHz		

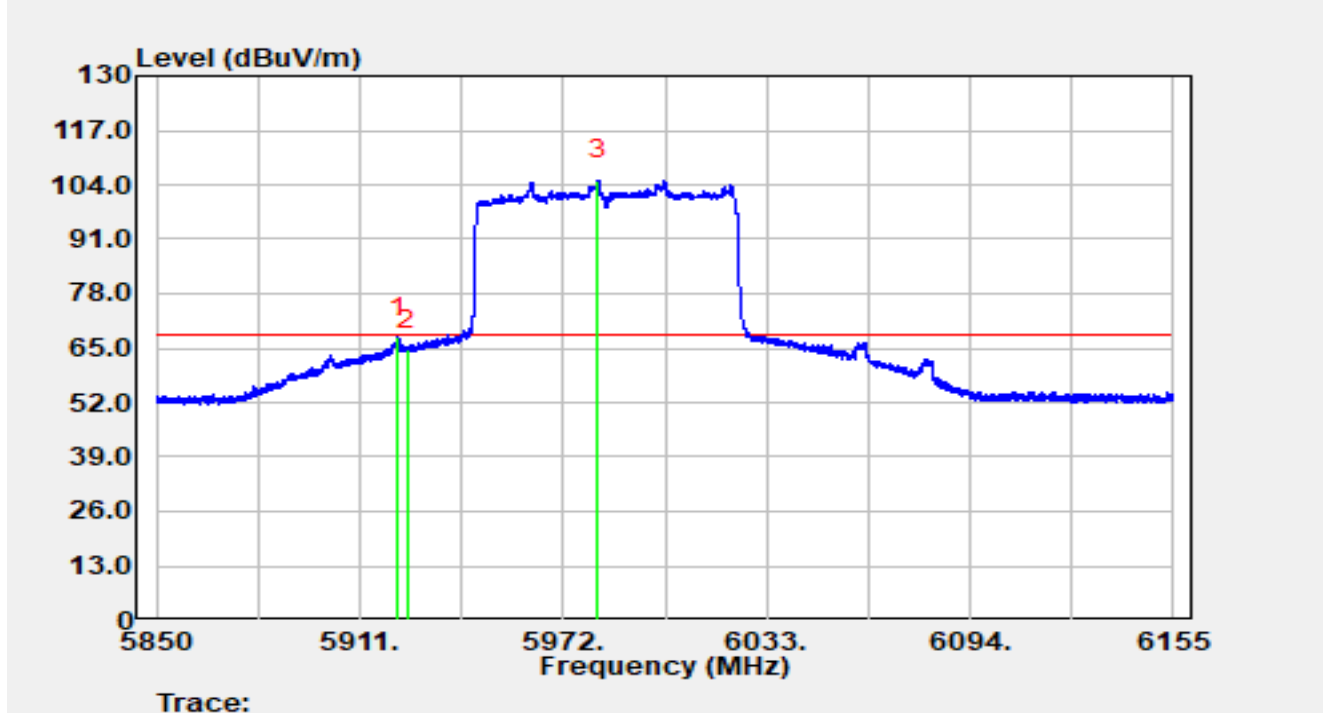


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5922.529	75.10	-7.54	67.56	-0.64	68.20	Average
2		5925.000	72.03	-7.51	64.51	-3.69	68.20	Average
3		5982.339	112.86	-7.70	105.17	N/A	N/A	Average

Notes:

1. “ * “, means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-06-24
Temperature	23.8 °C	Humidity	61.1%
Limit	FCC_Part 15_Band Edge(3 m)_6G	Test Engineer	Mero Zhou
Factor	BBHA 9120D_02042	Polarity	Vertical
EUT	ACCESS POINT	Test Voltage	By PoE
Test Mode	Transmit by 802.11be-EHT80 at 5985MHz		

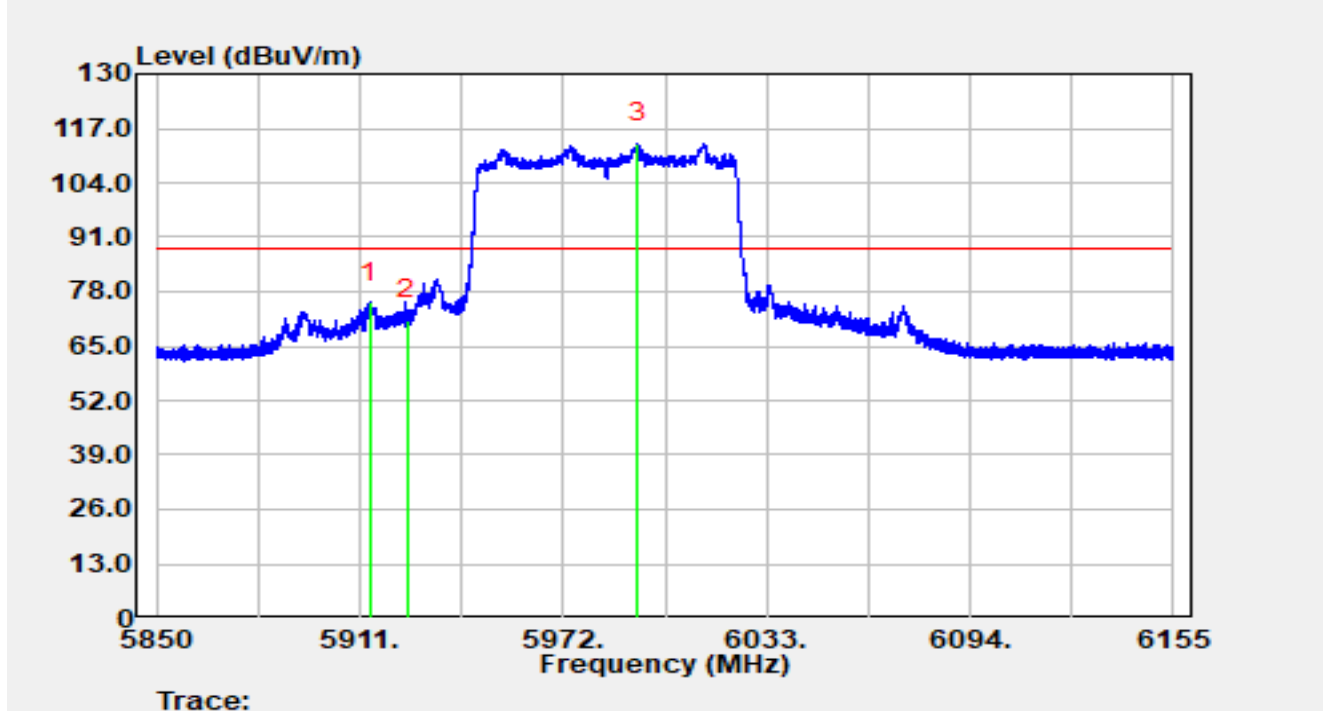


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5913.836	83.09	-7.62	75.47	-12.73	88.20	Peak
2		5925.000	78.66	-7.51	71.14	-17.06	88.20	Peak
3		5994.356	120.96	-7.56	113.40	N/A	N/A	Peak

Notes:

1. “ * “, means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-06-24
Temperature	23.8 °C	Humidity	61.1%
Limit	FCC_Part 15_Band Edge(3 m)_6G	Test Engineer	Mero Zhou
Factor	BBHA 9120D_02042	Polarity	Vertical
EUT	ACCESS POINT	Test Voltage	By PoE
Test Mode	Transmit by 802.11be-EHT80 at 5985MHz		

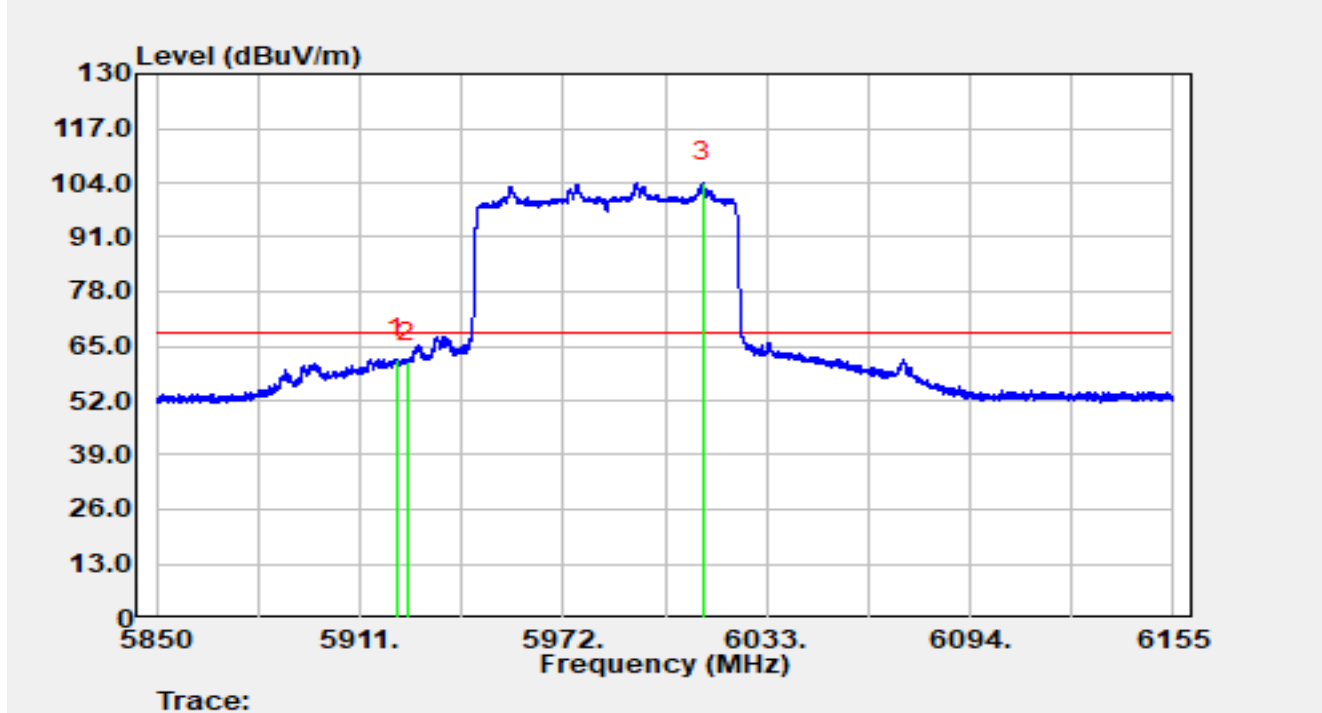


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5921.919	69.49	-7.54	61.95	-6.25	68.20	Average
2		5925.000	68.72	-7.51	61.21	-6.99	68.20	Average
3		6013.907	111.79	-7.57	104.22	N/A	N/A	Average

Notes:

1. “ * “, means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-06-24
Temperature	23.8 °C	Humidity	61.1%
Limit	FCC_Part 15_Band Edge(3 m)_6G	Test Engineer	Mero Zhou
Factor	BBHA 9120D_02042	Polarity	Horizontal
EUT	ACCESS POINT	Test Voltage	By PoE
Test Mode	Transmit by 802.11be-EHT160 at 6025MHz		

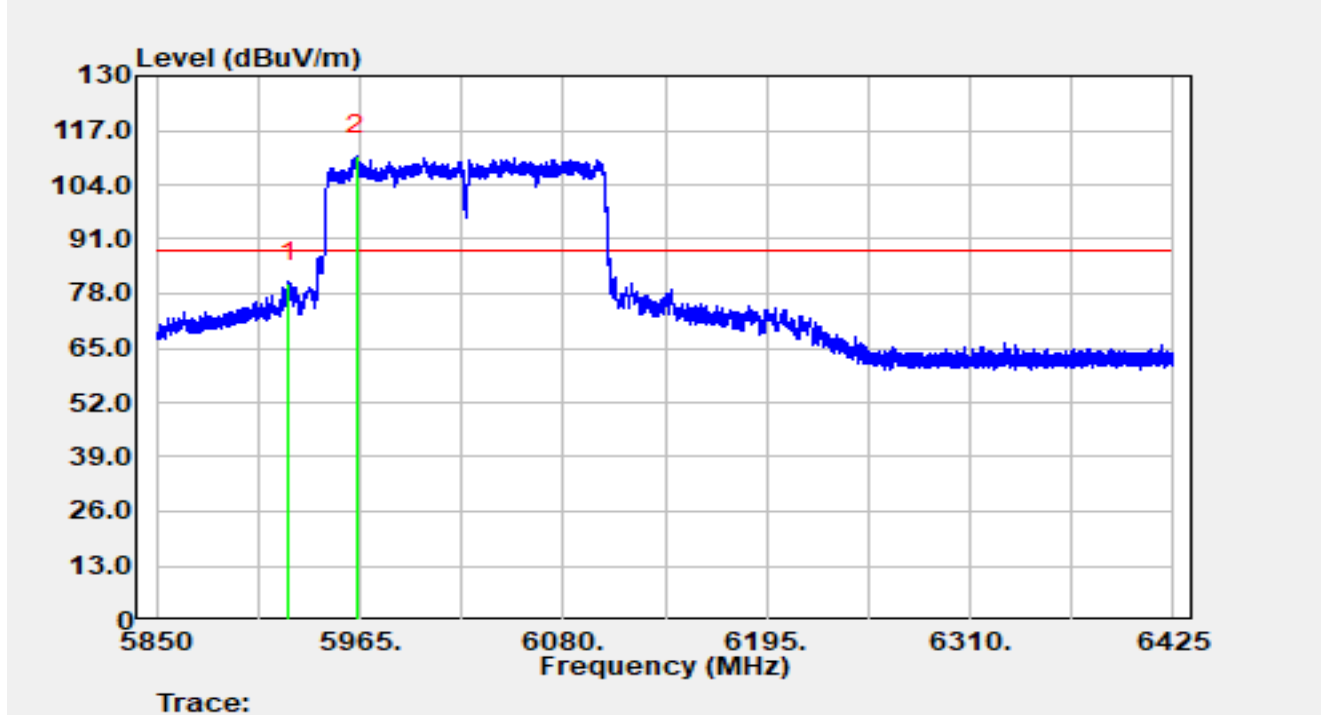


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5925.000	88.01	-7.51	80.49	-7.71	88.20	Peak
2		5963.045	118.53	-7.49	111.04	N/A	N/A	Peak

Notes:

1. “ * “, means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-06-24
Temperature	23.8 °C	Humidity	61.1%
Limit	FCC_Part 15_Band Edge(3 m)_6G	Test Engineer	Mero Zhou
Factor	BBHA 9120D_02042	Polarity	Horizontal
EUT	ACCESS POINT	Test Voltage	By PoE
Test Mode	Transmit by 802.11be-EHT160 at 6025MHz		

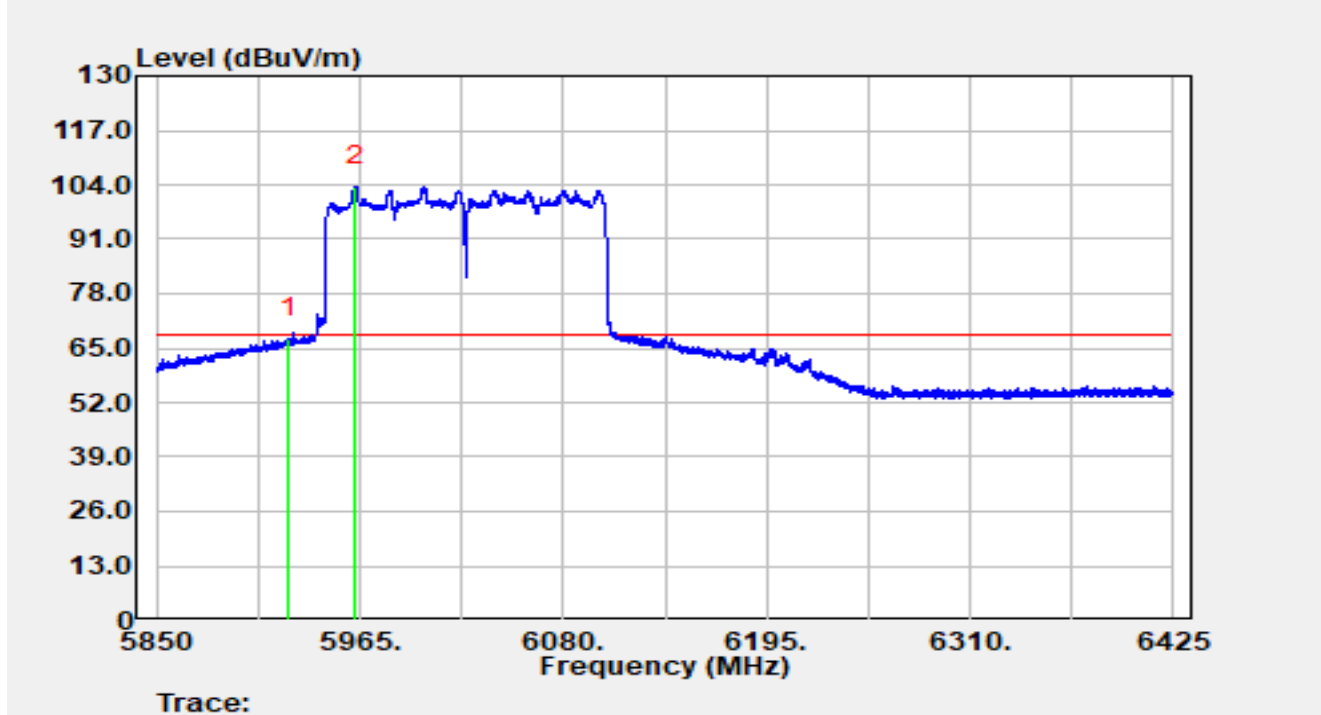


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5925.000	74.87	-7.51	67.36	-0.84	68.20	Average
2		5962.643	111.06	-7.49	103.57	N/A	N/A	Average

Notes:

1. “ * “, means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-06-24
Temperature	23.8 °C	Humidity	61.1%
Limit	FCC_Part 15_Band Edge(3 m)_6G	Test Engineer	Mero Zhou
Factor	BBHA 9120D_02042	Polarity	Vertical
EUT	ACCESS POINT	Test Voltage	By PoE
Test Mode	Transmit by 802.11be-EHT160 at 6025MHz		

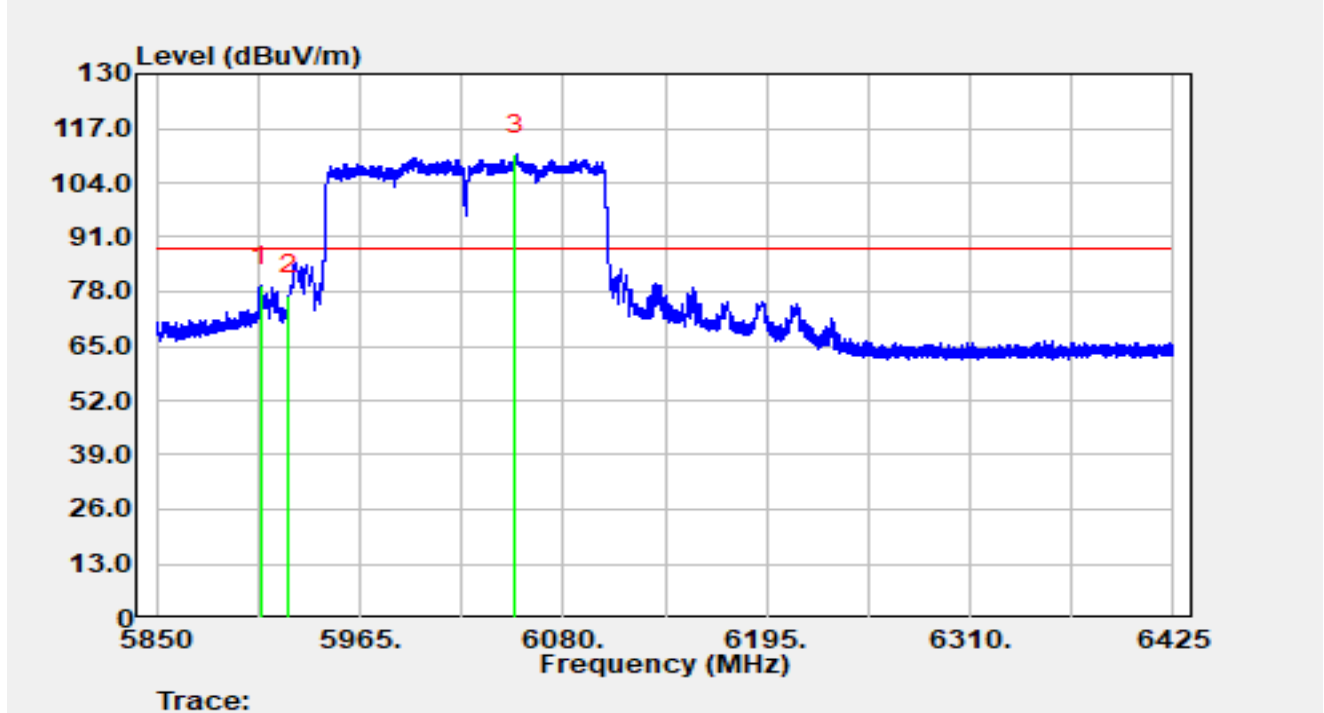


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5909.110	87.03	-7.57	79.46	-8.74	88.20	Peak
2		5925.000	84.67	-7.51	77.16	-11.04	88.20	Peak
3		6053.147	118.38	-7.70	110.68	N/A	N/A	Peak

Notes:

1. “ * “, means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-06-24
Temperature	23.8 °C	Humidity	61.1%
Limit	FCC_Part 15_Band Edge(3 m)_6G	Test Engineer	Mero Zhou
Factor	BBHA 9120D_02042	Polarity	Vertical
EUT	ACCESS POINT	Test Voltage	By PoE
Test Mode	Transmit by 802.11be-EHT160 at 6025MHz		

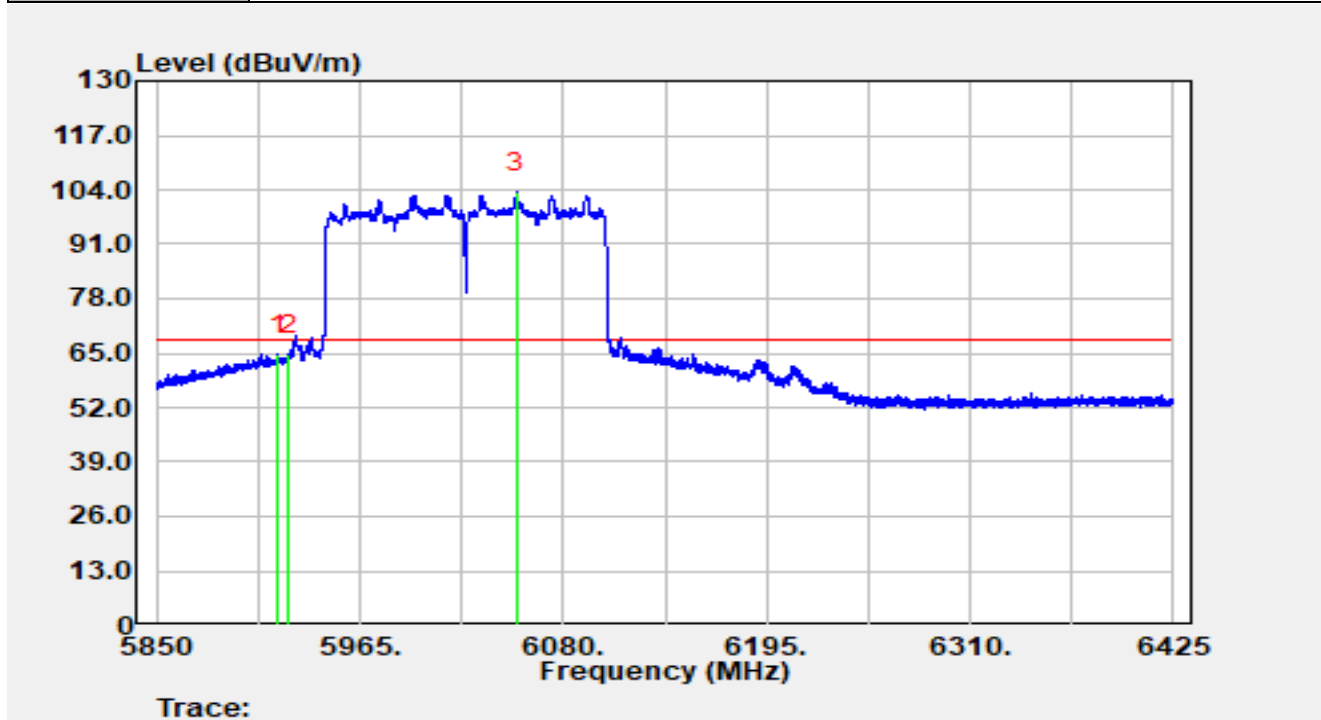


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5918.482	72.28	-7.58	64.70	-3.50	68.20	Average
2		5925.000	72.18	-7.51	64.67	-3.53	68.20	Average
3		6053.723	111.03	-7.69	103.34	N/A	N/A	Average

Notes:

1. “ * “, means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

A.9 AC Conducted Emissions Test Result

Site	SIP-SR2	Test Date	2025-08-15
Temperature	23.1 °C	Humidity	65.1%
Limit	FCC Part 15.207_CE_Mains	Test Engineer	Poli Cai
Factor	ENV216_101684_C	Polarity	Line
EUT	ACCESS POINT	Test Voltage	AC 120 V/60 Hz
Test Mode	Transmit by 802.11be-EHT40 at 6565 MHz		

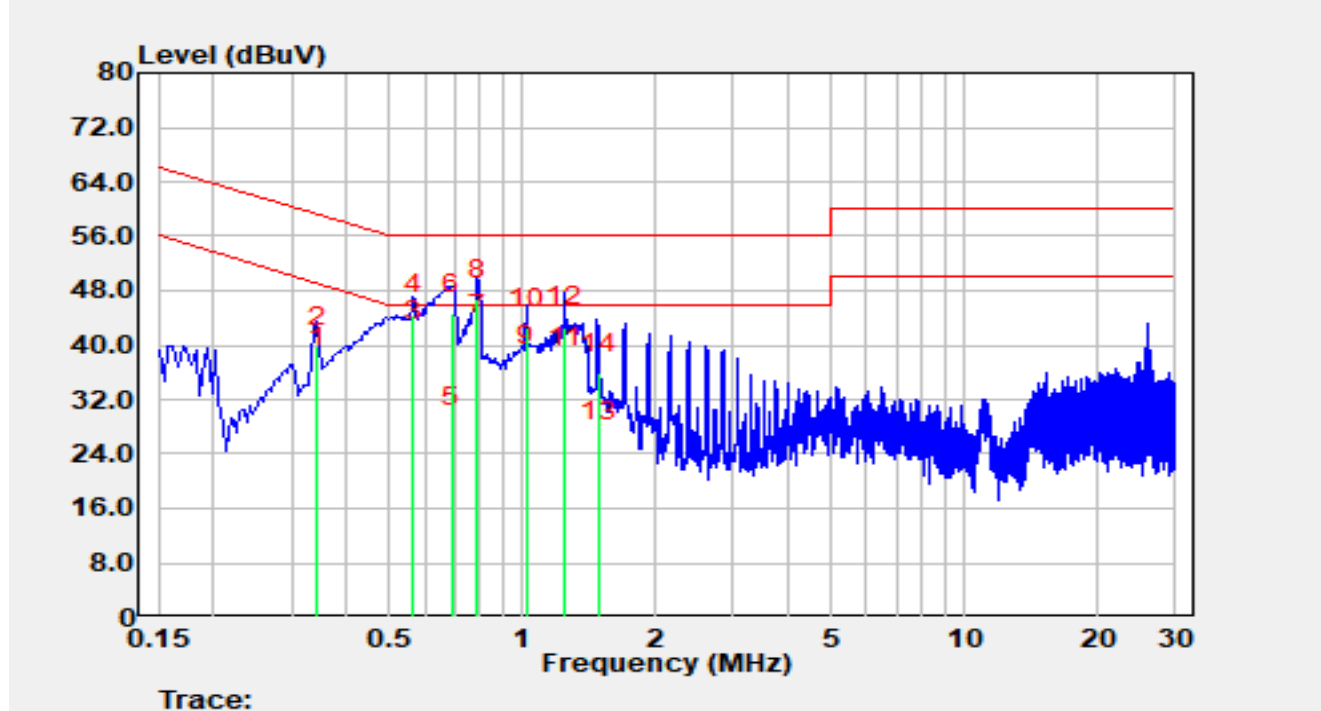


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB)	Measurement (dBμV)	Margin (dB)	Limit (dBμV)	Detector
1		0.342	26.83	9.73	36.55	-12.60	49.15	Average
2		0.342	29.97	9.73	39.70	-19.46	59.15	QP
3		0.566	31.00	9.74	40.74	-5.26	46.00	Average
4		0.566	34.78	9.74	44.52	-11.48	56.00	QP
5		0.690	18.30	9.74	28.04	-17.96	46.00	Average
6		0.690	34.88	9.74	44.62	-11.38	56.00	QP
7	*	0.790	31.87	9.75	41.62	-4.38	46.00	Average
8		0.790	36.95	9.75	46.69	-9.31	56.00	QP
9		1.020	27.28	9.74	37.02	-8.98	46.00	Average
10		1.020	32.80	9.74	42.54	-13.46	56.00	QP
11		1.250	26.84	9.75	36.59	-9.41	46.00	Average
12		1.250	32.93	9.75	42.68	-13.32	56.00	QP
13		1.480	15.98	9.76	25.74	-20.26	46.00	Average

14		1.480	26.14	9.76	35.90	-20.10	56.00	QP
----	--	-------	-------	------	-------	--------	-------	----

Notes:

1. " * " indicates the worst-case emission level observed during the measurement.
2. C.F (dB) = LISN Factor (dB) + Cable Loss (dB).
3. Measurement (dB μ V) = Reading (dB μ V) + C.F (dB).

Site	SIP-SR2	Test Date	2025-08-15
Temperature	23.1 °C	Humidity	65.1%
Limit	FCC Part 15.207_CE_Mains	Test Engineer	Poli Cai
Factor	ENV216_101684_C	Polarity	Neutral
EUT	ACCESS POINT	Test Voltage	AC 120 V/60 Hz
Test Mode	Transmit by 802.11be-EHT40 at 6565 MHz		

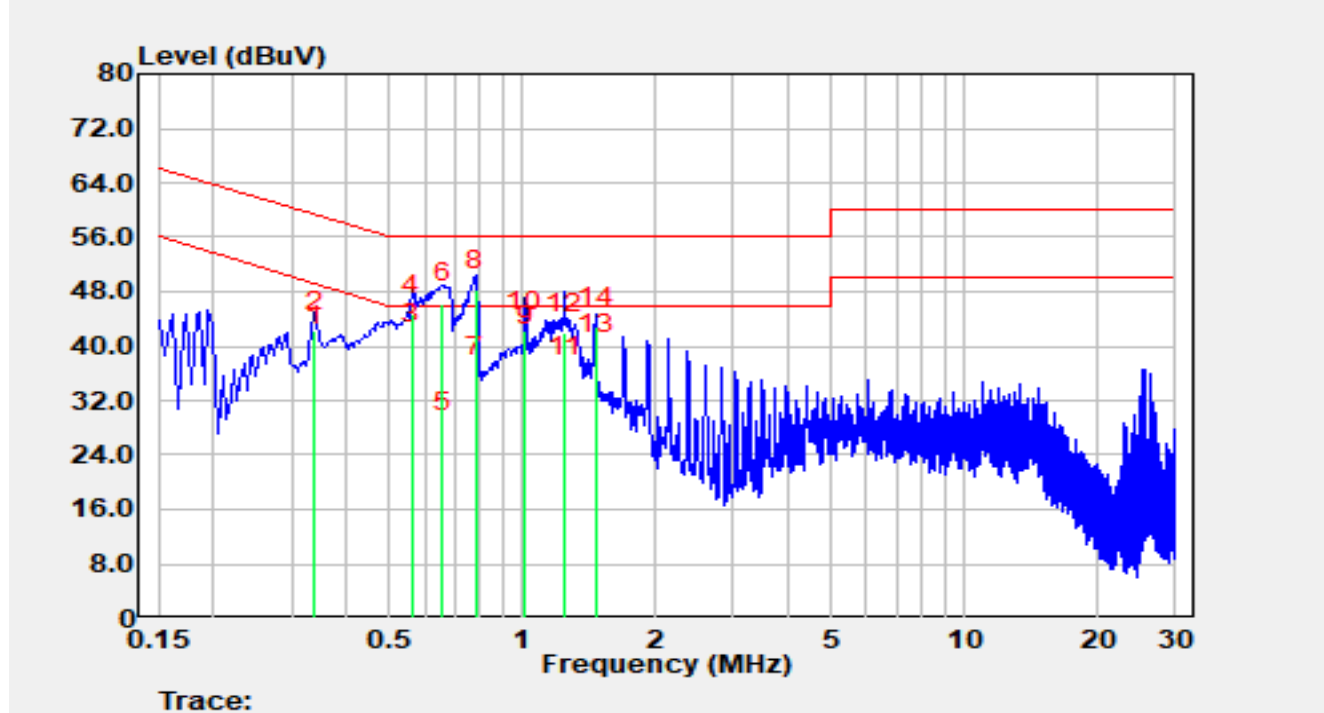

No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB)	Measurement (dBμV)	Margin (dB)	Limit (dBμV)	Detector
1		0.338	30.34	9.71	40.05	-9.20	49.25	Average
2		0.338	32.42	9.71	42.12	-17.13	59.25	QP
3	*	0.562	30.70	9.72	40.42	-5.58	46.00	Average
4		0.562	34.84	9.72	44.56	-11.44	56.00	QP
5		0.658	17.59	9.72	27.31	-18.69	46.00	Average
6		0.658	36.55	9.72	46.27	-9.73	56.00	QP
7		0.782	25.76	9.73	35.48	-10.52	46.00	Average
8		0.782	38.56	9.73	48.29	-7.71	56.00	QP
9		1.010	30.37	9.72	40.09	-5.91	46.00	Average
10		1.010	32.50	9.72	42.22	-13.78	56.00	QP
11		1.250	25.62	9.73	35.35	-10.65	46.00	Average
12		1.250	32.12	9.73	41.85	-14.15	56.00	QP
13		1.470	28.97	9.74	38.71	-7.29	46.00	Average
14		1.470	32.98	9.74	42.72	-13.28	56.00	QP

Notes:

1. " * " indicates the worst-case emission level observed during the measurement.
2. C.F (dB) = LISN Factor (dB) + Cable Loss (dB).
3. Measurement (dB μ V) = Reading (dB μ V) + C.F (dB).

Appendix B – Test Setup Photograph

Refer to “R25S1024045-UT” file.

Appendix C – EUT Photograph

Refer to “R25S1024045-UE” file.

_____ The End _____