


PART NUMBER BLOCK	
PART NUMBER	REV
4L.RAJBA.005	1

REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
1	RELEASE TO FILE	02/07/23	STAR YANG




出
标
方
向

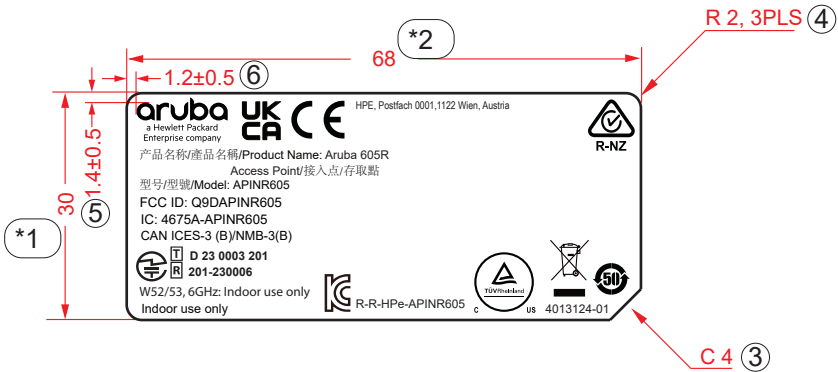

- NOTES:
- MATERIAL: 50μ Polyester Film White Matt Label with Depressive Liner , 金利宝 HTYL 50(EB)-R2ZL
ADHESIVE: 网纹背胶
 - COLOR:
 - COLOR OF BASE: WHITE
 - COLOR OF FONT: BLACK
 - THICKNESS OF FACE STOCK: 0.052 ± 0.004
 - THICKNESS OF ADHESIVE: 0.033 ± 0.003
 - 卷状出货, 边距3±0.5mm, 跳距3±0.3mm
 - UL Approved, PGJ12, CM-100T-030. 必须搭配碳带: Ricoh"B110A"/"B110CR"
 - TEMPERATURE RESISTANT= 120°C.
 - 原材料粘着力(180°Peel Adhesion): ≥1.7kgf/25mm
 - TEST REQUIREMENT:

	TEST ITEM	TEST SPEC	TEST CONDITION	CRITERIA
1	□□□□□	ISO Class: 1 ASTM Class: 4 B	ASTM D3359-02/ ISO 2409:2007	Detachment of small flakes of the coating at the intersections of the cuts. A cross-cut area not significantly greater than 5 % is affected.


NEXT ASSY	USED ON
APPLICATION	

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE IN mm AND TOLERANCES ARE:				
INTEGRAL DIMENSIONS 1 PLACE DECIMAL		± 0.2 ± 0.2	ANGULAR DIMENSIONS HOLES UNDER ϕ 5.00	± 2° ± 0.2
MATERIAL: SEE NOTES				
FINISH: SEE NOTES				
THIRD ANGLE PROJECTION 	DRAWN	VERA ZHAO	02/07/23	
	ENGR	VERA ZHAO	02/07/23	
	APVD	STAR YANG	02/07/23	


 Wistron NeWeb Corp.		啟碁科技股份有限公司 20 Park Avenue II, Hsinchu Science Park, Hsinchu 308, Taiwan, R.O.C. Tel: 886-3-6667799 Fax: 886-3-5788726	
DWG TITLE			
LABEL,BASE AGENCY,68*30MM,4013124-01,RAJB-AB05-12			
SIZE A4	DWG NO. 4L.RAJBA.005		REV 1
SCALE 1/1		SHEET 1 OF 1	

PART NUMBER BLOCK	
PART NUMBER	REV
4L.RFKQA.001	1

REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
1	RELEASE TO FILE		




出
标
方
向

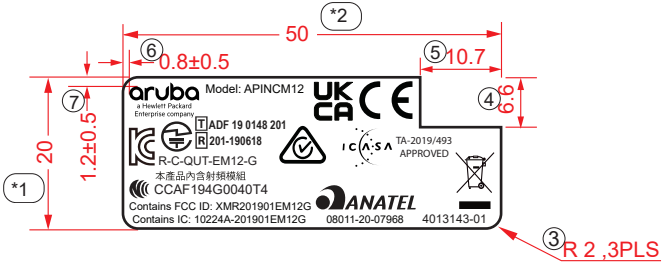

- NOTES:
- 1. MATERIAL: 50μ Polyester Film White Matt Label with Depressive Liner , 金利宝 HTYL 50(EB)-R2ZL
ADHESIVE: 网纹背胶
 - 2. COLOR:
 - a. COLOR OF BASE: WHITE
 - b. COLOR OF FONT: BLACK
 - 3. THICKNESS OF FACE STOCK: 0.052±0.004
 - 4. THICKNESS OF ADHESIVE: 0.033±0.003
 - 5. 卷状出货, 边距3±0.5mm, 跳距3±0.3mm
 - 6. UL Approved, PGJ12, CM-100T-030. 必须搭配碳带: Ricoh"B110A"/"B110CR"
 - 7.TEMPERATURE RESISTANT= 120°C.
 - 8.原材粘着力(180°Peel Adhesion): ≥1.7kgf/25mm
 - 9.TEST REQUIREMENT:


	TEST ITEM	TEST SPEC	TEST CONDITION	CRITERIA
1	□□□□□	ISO Class.: 1 ASTM Class.: 4 B	ASTM D3359-02/ ISO 2409:2007	Detachment of small flakes of the coating at the intersections of the cuts. A cross-cut area not significantly greater than 5 % is affected.

NEXT ASSY	USED ON
APPLICATION	

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE IN mm AND TOLERANCES ARE:			
INTEGRAL DIMENSIONS 1 PLACE DECIMAL		± 0.2 ± 0.2	ANGULAR DIMENSIONS ± 2° HOLES UNDER φ 5.00 ± 0.2
MATERIAL: SEE NOTES			
FINISH: SEE NOTES			
THIRD ANGLE PROJECTION 	DRAWN		
	ENGR		
	APVD		

WNC 啟碁科技股份有限公司 Wistron NeWeb Corp. 20 Park Avenue II, Hsinchu Science Park, Hsinchu 308, Taiwan, R.O.C. Tel: 886-3-6667799 Fax: 886-3-5788726			
DWG TITLE			
SIZE A4	DWG NO.		REV 1
SCALE	1/1	SHEET	1 OF 1

AP605R12 Label Location

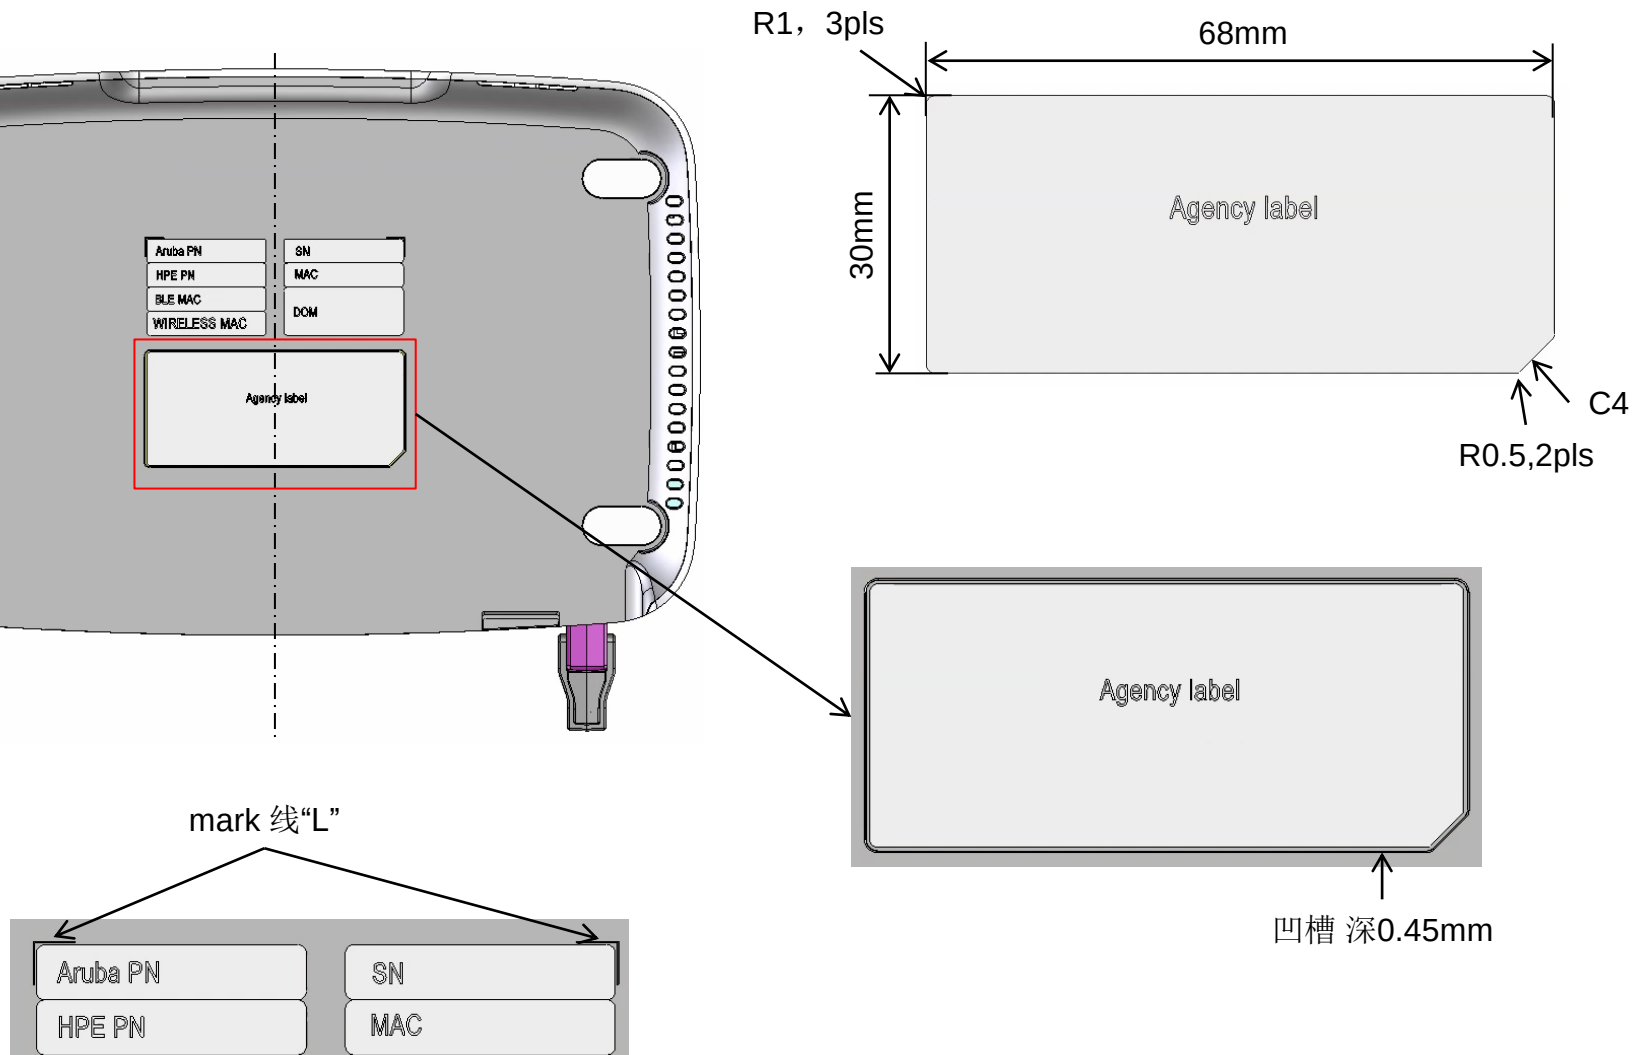

AP605R12 L Label Location-FRU

