

Safety Label Note:

① Printing color: Pantone Black C

② 製造國家 (MFG Country) :

Decided by import & export country

For example:

1. MADE IN TAIWAN / Made in Taiwan

2. MADE IN CHINA / Made in China

印刷廠商代號 (Vender ID) : ( CSA Request)

Decided by Vender


製造工廠代號 (MFG Factory) : ( UL Request)

視代工廠而定 (Decided by MFG Factory) :

1. 昊陽 / Joytech (深圳 / ShenZhen) -----> None

2. Accton -----> AC

③ If  UL logo is printed, Vender must use the label material applied for UL certification (PGDQ2)

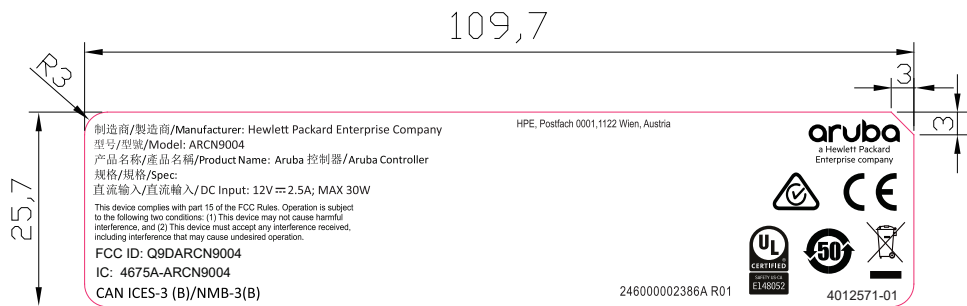

Modification		Card Paper / Top lineboard				Corrugate list				Cardboard Die Cut Legend				Unspecialized Die Cut Tolerance = +/- 0.2mm				PE Bag (A Degree)				Clear		Pink		Label list				(Total Thickness = mm±10%)				Comply with RoHs				Accton TECHNOLOGY CORP. Part No. 246000002386A REV. 01 Description: AGENCY LABEL WC9004-0618-07 UNITSCALE 1 / 1SIZE A3 MMOutside ViewSheet 1 of 1											
1		Paper				Flute (A Degree)				(C) Cutting Line				Grade				Normal (No Anti-Static)				Anti-Static		ESD Value/Ω = 9-11		Material & Thickness				Adhesive (Except all leds in FP label)				Others															
2		CCNB				Single wall Double wall GSM (g/m²) (reference)				(C1) Crease Line				0 1 2 3 4 5				Anti-Static Electronic				Electronic		ESD Value/Ω < 5		Art paper				Acrylic				Material Spec:															
3		SBS				Bursting Strength (kg/cm²)				(PBL) Partial Blunt Line				0.05 0.1 0.15 0.2 0.3 0.8				ESD Value / qhm = 9-11				Thickness/mm		0.04		0.06		0.08		Metalized				Acrylic UL approved								T=0.022mm							
4		Double SBS				End Crush Test (kg/cm²)				(SO) Slit-Score Line				0.2 0.25 0.4 0.5 1.2 3.8				ESD Value / qhm < 5				Single layer		Put-in material >= 8 kg (By 1.5M / Width x 100M / Length)		White Polyester				"R" Adhesive				T=0.022mm															
5						AB Taiwan 230X100X100X230				(SL) Slit Line				250 500 1000				Put-in material >= 16 kg (By 1.5M / Width x 100M / Length)				Bubble Bag (Bubble Ø=10mm)		Double layer		Put-in material >= 16 kg (By 1.5M / Width x 100M / Length)		PP)Pepa paper				Water Adhesive				T=0.022mm													
6						China 250 X 150 X 250				Flute Direction				0.1 0.25 0.3 0.6 0.8 1.8				Recycle Kraft 80% + Newspaper 20%				EPE Foam		White		Pink		PC 8B35				3M 467				T=0.05mm / 2mil													
7						BC China 250X100X100X250				Manufactory Stamp				0.3 0.5 0.8 1.2 3.8				Weight/gs +/-5%				Density (kg / m ³)		27 ≥ 0		Other		PC 8010				3M 468				T=0.127mm / 5mil													
This document and the technical data disclosed are proprietary to Accton Tech. Corp. and shall not be duplicated, used, released, or disclosed without expressed written permission.		Coated				UV				Glue Joint				Hydrous %				Laminated		Non - laminated		PP Film				LF (T = 0.045mm)				DF (T = 0.035mm)				Approve								Melody				04.10'19			
		PP Film				Te 0.15 mm				DF 0.03 mm				18 37.4				Draft Angle		3°		Hydrous %		7 11%										Check															
																																				Design				Grace				04.10'19					