
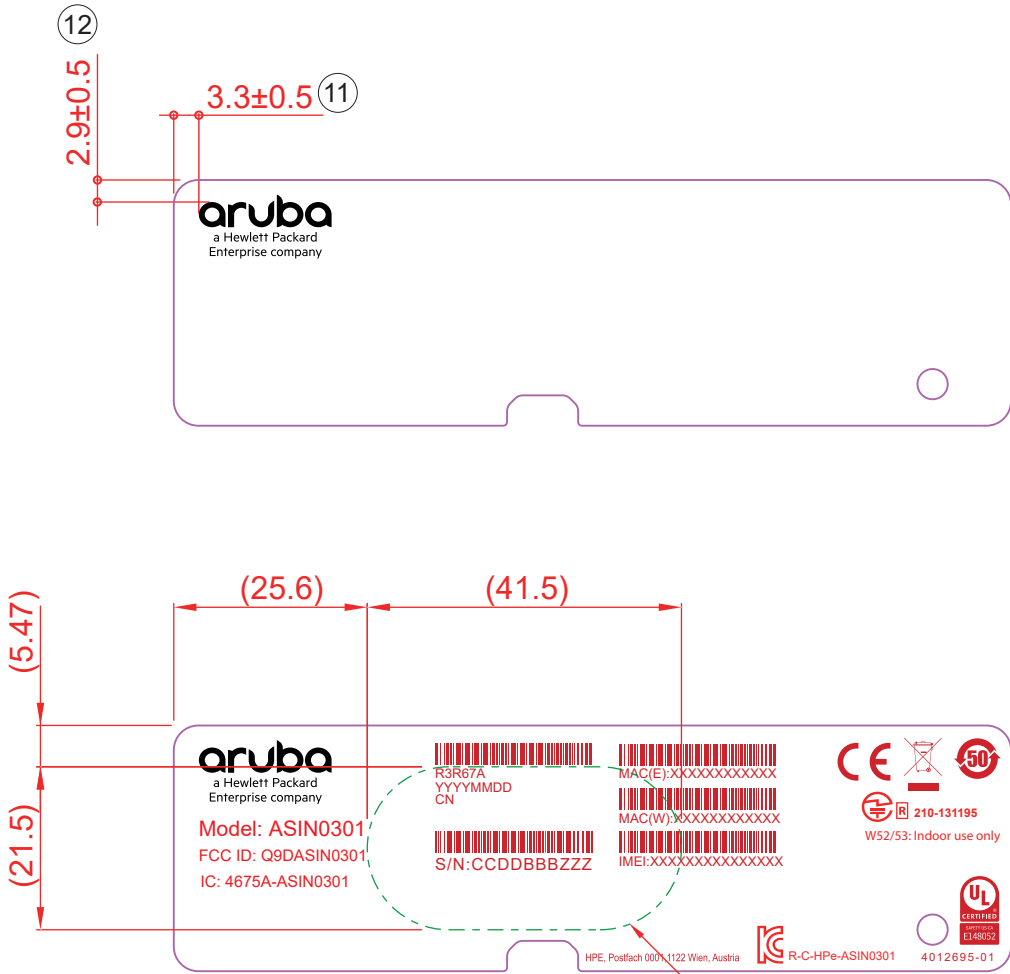


REVISIONS				
ZONE	REV	DESCRIPTION	DATE	APPROVE

A

A

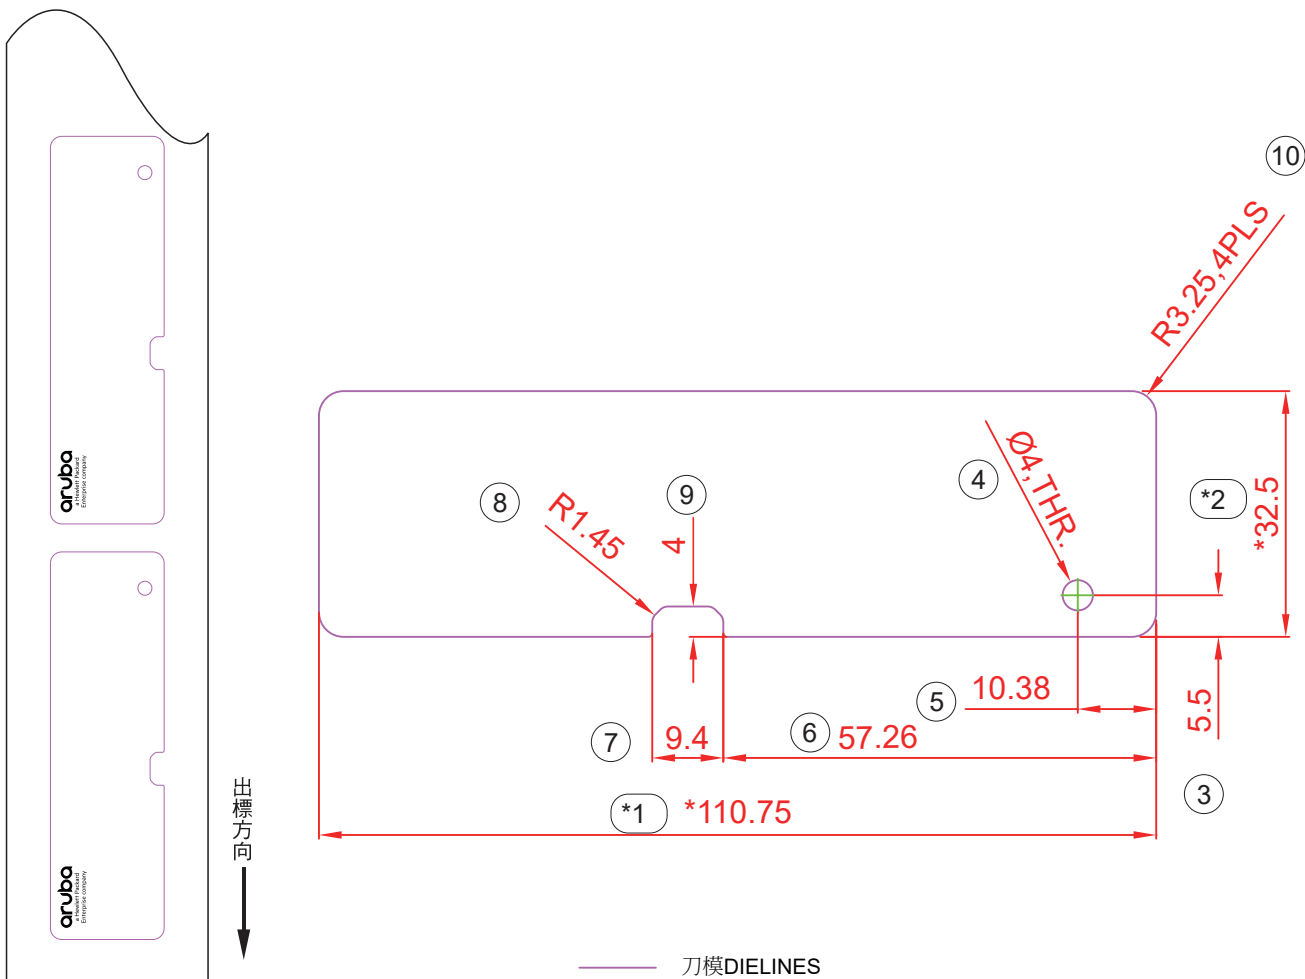

- NOTES:
- MATERIAL: WHITE PET, t=0.05 ,金利寶HTYL50(EB)
ADHESIVE: 網紋背膠, t=0.035mm
FINISH: 上霧PET,T=0.025mm
 - COLOR:
 - 底色為BACKGROUND
 - 印刷PMS BLACK C
 - 刀模DIELINES — ,孔洞需排廢.
 - 捲狀出貨,離型紙左右間距各3±0.5mm, 上下間距各3±0.3mm
 - TEMPERATURE RESISTANT= 120°C.
 - 被貼物:鋁
 - 圖案印刷公差:尺寸30mm以下~120mm為±0.3mm,120~315mm為±0.5mm,315以上±0.8mm
 - UL APPROVED, PGJ12
 - TEST REQUIREMENTS

TEST ITEM	TEST SPEC	TEST CONDITION	CRITERIA
1	□□□□ ISO Class.: 1 ASTM Class.: 4 B	ASTM D3359-02/ ISO 2409:2007	Detachment of small flakes of the coating at the intersections of the cuts. A cross-cut area not significantly greater than 5% is affected.

- 紅字為線上列印, 實際內容需參照LABEL FORM (R10.7)
- SN打印範圍參考

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE IN mm AND TOLERANCES ARE: INTEGRAL DIMENSIONS ± 0.2 1 PLACE DECIMAL ± 0.2 ANGULAR DIMENSIONS ± 2° HOLES UNDER Ø5.00 ± 0.2		THIRD ANGLE PROJECTION 		WNC 啟碁科技股份有限公司 20 Park Avenue II, Hsinchu Science Park, Hsinchu 308, Taiwan, R.O.C. Tel: 886-3-6667799 Fax: 886-3-5788726	
				DWG TITLE	
DRAWN	CATHY CHEN	06/24/19	SIZE A3	DWG NO.	REV
ENGR	CATHY CHEN	06/24/19			
APVD	EDWARD SU	06/24/19	SCALE	1/1	SHEET 1 OF 1