RF MEASUREMENT REPORT

FCC ID:	Q9DASIN0307
Applicant:	Hewlett Packard Enterprise Company
Product:	HPE Aruba User Experience Sensor
Model No.:	ASIN0307
Trademark:	Hewlett Packard Enterprise
FCC Classification:	Digital Transmission System (DTS)
FCC Rule Part(s):	Part 15 Subpart C (Section 15.247)
Result:	Complies
Received Date:	2025-04-08
Test Date:	2025-06-03 ~ 2025-06-30

Reviewed By: Jame Yuan

Approved By: Robin Wu

ACCREDITED
TESTING LABORATORY
CERTIFICATE #3628.01

The test results relate only to the samples tested.
This equipment has been shown to be capable of compliance with the applicable technical standards as indicated in the measurement report and was tested in accordance with the measurement procedures specified in ANSI C63.10-2020. Test results reported herein relate only to the item(s) tested.
The test report shall not be reproduced except in full without the written approval of MRT Technology (Suzhou) Co., Ltd.

Revision History

Report No.	Version	Description	Issue Date	Note
R25S1034045-U208	V01	Initial Report	2025-12-16	Valid

Note: This report is based on MRT Report: R25S1034045-U201. ASIN0308 and ASIN0307 share the same PCB. ASIN0307 remove LTE/GPS module and antenna based on ASIN0308, others are the same. Therefore, we only did some spot-check tests for ASIN0307.

CONTENTS

Description Page

1. General Information 5

1.1. Applicant 5
1.2. Manufacturer 5
1.3. Testing Facility 5
1.4. Product Information 6
1.5. Radio Specification under Test 7
1.6. Working Frequencies 7

2. Test Configuration 8

2.1. Test Mode 8
2.2. Test System Connection Diagram 8
2.3. Test Software 8
2.4. Applied Standards 9
2.5. Test Environment Condition 9

3. Antenna Requirements 10

4. Measuring Instrument 11

5. Decision Rules and Measurement Uncertainty 12

5.1. Decision Rules 12
5.2. Measurement Uncertainty 12

6. Test Result 13

6.1. Summary 13
6.2. 6dB Bandwidth Measurement 14
6.2.1. Test Limit 14
6.2.2. Test Procedure 14
6.2.3. Test Setting 14
6.2.4. Test Setup 14
6.2.5. Test Result 14
6.3. Output Power Measurement 15
6.3.1. Test Limit 15
6.3.2. Test Procedure 15
6.3.3. Test Setting 15
6.3.4. Test Setup 15
6.3.5. Test Result 15
6.4. Power Spectral Density Measurement 16
6.4.1. Test Limit 16
6.4.2. Test Procedure 16

6.4.3. Test Setting 16
6.4.4. Test Setup 16
6.4.5. Test Result 16
6.5. Conducted Band Edge and Out-of-Band Emissions Measurement 17
6.5.1. Test Limit 17
6.5.2. Test Procedure 17
6.5.3. Test Settitng 17
6.5.4. Test Setup 18
6.5.5. Test Result 18
6.6. Radiated Spurious Emission Measurement 19
6.6.1. Test Limit 19
6.6.2. Test Procedure 19
6.6.3. Test Setting 19
6.6.4. Test Setup 21
6.6.5. Test Result 22
6.7. Radiated Restricted Band Edge Measurement 23
6.7.1. Test Limit 23
6.7.2. Test Procedure 24
6.7.3. Test Setting 24
6.7.4. Test Setup 25
6.7.5. Test Result 25
6.8. AC Conducted Emissions Measurement 26
6.8.1. Test Limit 26
6.8.2. Test Setup 26
6.8.3. Test Result 26

Appendix A - Test Result 27

A.1 Duty Cycle Test Result 27
A.2 6dB Bandwidth Test Result 28
A.3 Output Power Test Result 30
A.4 Power Spectral Density Test Result 32
A.5 Conducted Band Edge and Out-of-Band Emissions Test Result 34
A.6 Radiated Spurious Emission Test Result 36
A.7 Radiated Restricted Band Edge Test Result 42
A.8 AC Conducted Emissions Test Result 50

Appendix B - Test Setup Photograph 54

Appendix C - EUT Photograph 55

Appendix D - Original Report 56

1. General Information

1.1. Applicant

Hewlett Packard Enterprise Company

6280 America Center Drive, San Jose CA 95002, United States

1.2. Manufacturer

Hewlett Packard Enterprise Company

6280 America Center Drive, San Jose CA 95002, United States

1.3. Testing Facility

☒	**Test Site – MRT Suzhou Laboratory**
	Laboratory Location (Suzhou - Wuzhong) D8 Building, No.2 Tian'edang Rd., Wuzhong Economic Development Zone, Suzhou, China **Laboratory Location (Suzhou - SIP)** 4b Building, Liando U Valley, No.200 Xingpu Rd., Shengpu Town, Suzhou Industrial Park, China **Laboratory Location (Suzhou - Wujiang)** Building 1, No.1 Xingdong Road, Wujiang, Suzhou, Jiangsu, People's Republic of China
	Laboratory Accreditations
	A2LA: 3628.01 CNAS: L10551 FCC: CN1166 ISED: CN0001 VCCI: ☐R-20025 ☐G-20034 ☐C-20020 ☐T-20020 ☐R-20141 ☐G-20134 ☐C-20103 ☐T-20104
☐	**Test Site – MRT Shenzhen Laboratory**
	Laboratory Location (Shenzhen) 1G, Building A, Junxiangda Building, Zhongshanyuan Road West, Nanshan District, Shenzhen, China
	Laboratory Accreditations
	A2LA: 3628.02 CNAS: L10551 FCC: CN1284 ISED: CN0105
☐	**Test Site – MRT Taiwan Laboratory**
	Laboratory Location (Taiwan) No. 38, Fuxing 2nd Rd., Guishan Dist., Taoyuan City 333, Taiwan (R.O.C.)
	Laboratory Accreditations
	TAF: 3261 FCC: 291082, TW3261 ISED: TW3261

1.4. Product Information

Product Name	HPE Aruba User Experience Sensor
Model No.	ASIN0307
Serial No.	CNTJMNV02J (Conducted) CNTLMNT00C (Radiated)
Software Version	25.438.42 (r851417 WLTEST)
Wi-Fi Specification	802.11a/b/g/n/ac/ax/be
Bluetooth Specification	BLE only
ZigBee Specification	802.15.4
Antenna Specification	Refer to Section 1.5
Power Type	AD/DC adapter input or PoE Injector Input
Accessory	
AC/DC Adapter	Model No.: WB-12G12R Input: 100-240V ~ 50/60Hz, 0.3A Max Output: 12.0V⎓1.0A, 12.0W

Remarks:

1. The information of the EUT (Equipment Under Test) was provided by the manufacturer. The accuracy, completeness, and validity of the information are solely the responsibility of the manufacturer.
2. AC/DC Adapter was selected to perform all RF testing.

1.5. Radio Specification under Test

Bluetooth Frequency	2402 ~ 2480MHz
Channel Number	40
Type of modulation	GFSK
Data Rate	1Mbps & 2Mbps
Antenna Type	Dipole Antenna
Antenna Gain	Radio 0: 3.7dBi Radio 1: 3.0dBi

1.6. Working Frequencies

Channel	Frequency	Channel	Frequency	Channel	Frequency
00	2402 MHz	01	2404 MHz	02	2406 MHz
03	2408 MHz	04	2410 MHz	05	2412 MHz
06	2414 MHz	07	2416 MHz	08	2418 MHz
09	2420 MHz	10	2422 MHz	11	2424 MHz
12	2426 MHz	13	2428 MHz	14	2430 MHz
15	2432 MHz	16	2434 MHz	17	2436 MHz
18	2438 MHz	19	2440 MHz	20	2442 MHz
21	2444 MHz	22	2446 MHz	23	2448 MHz
24	2450 MHz	25	2452 MHz	26	2454 MHz
27	2456 MHz	28	2458 MHz	29	2460 MHz
30	2462 MHz	31	2464 MHz	32	2466 MHz
33	2468 MHz	34	2470 MHz	35	2472 MHz
36	2474 MHz	37	2476 MHz	38	2478 MHz
39	2480 MHz	--	--	--	--

2. Test Configuration

2.1. Test Mode

Mode 1: Transmit by BLE-1Mbps
Mode 2: Transmit by BLE-2Mbps

2.2. Test System Connection Diagram

The device was tested per the guidance ANSI C63.10-2020 was used to reference the appropriate EUT setup for radiated emissions testing and AC line conducted testing.

Connection Diagram

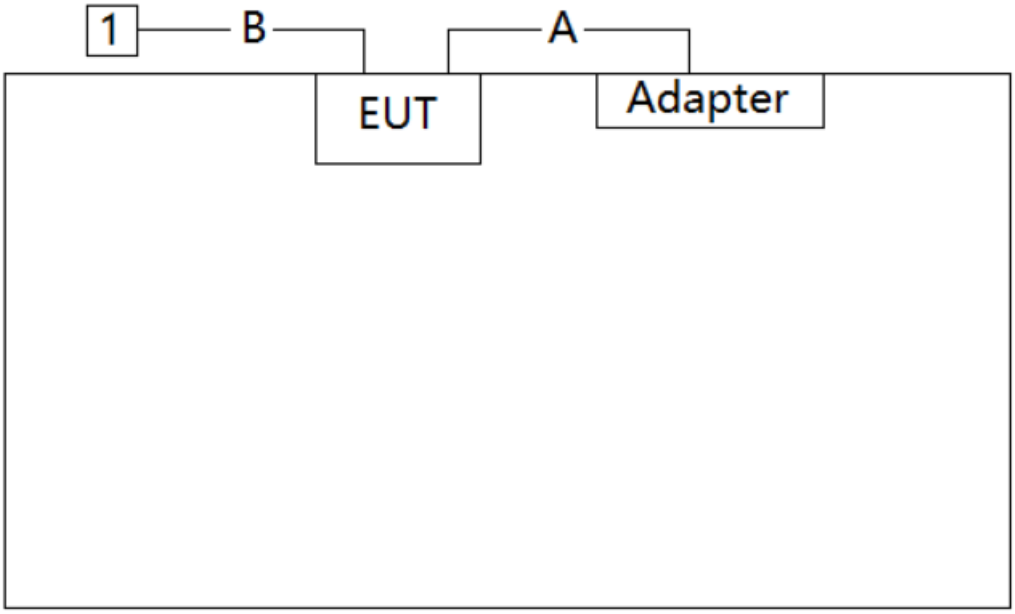

Cable Type		Cable Description	Length
A	Power Cable	Non shielded	2.0m
B	LAN Cable	Non shielded	> 10m
Product		**Manufacturer**	**Model No.**
1	Notebook	ThinkPad	Gen5 E14

2.3. Test Software

The test utility software used during testing was “IPOP”, and commands were provided by manufacturer.

Note: Final power setting please refer to operational description.

2.4. Applied Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- FCC Part 15.247
- KDB 558074 D01v05r02
- ANSI C63.10-2020
- ANSI C63.10-2020/Cor1-2023
- ANSI C63.10a-2024

2.5. Test Environment Condition

Ambient Temperature	15 ~ 35°C
Relative Humidity	20 ~75%RH

3. Antenna Requirements

Excerpt from §15.203 of the FCC Rules/Regulations:

"An intentional radiator antenna shall be designed to ensure that no antenna other than that furnished by the responsible party can be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section."

- The antenna of the device is **permanently attached.**
- There are no provisions for connection to an external antenna.

Conclusion:

The unit complies with the requirement of §15.203.

4. Measuring Instrument

Instrument	Manufacturer	Model No.	Asset No.	Cali. Interval	Cali. Due Date	Test Site
Thermohygrometer	testo	608-H1	MRTSUE06622	1 year	2025-10-29	SIP-AC2
Active Loop Antenna	Schwarzbeck	FMZB 1519-60 D	MRTSUE07075	1 year	2025-11-19	SIP-AC2
Anechoic Chamber	RIKEN	SIP-AC2	MRTSUE06781	1 year	2025-12-19	SIP-AC2
Cable	HUBER+SUHNER	SF106	MRTSUE06522	1 year	2026-05-06	SIP-AC2
EMI Test Receiver	R&S	ESR3	MRTSUE06185	1 year	2025-12-05	SIP-AC2/SIP-AC3
Thermohygrometer	testo	608-H1	MRTSUE06619	1 year	2025-10-16	SIP-AC3
TRILOG Antenna	Schwarzbeck	VULB 9168	MRTSUE06646	1 year	2025-07-29	SIP-AC3
Preamplifier	EMCI	EMC012645SE	MRTSUE06642	1 year	2026-01-05	SIP-AC3
Signal Analyzer	Keysight	N9010B	MRTSUE06559	1 year	2026-04-26	SIP-AC3
Horn Antenna	R&S	HF907	MRTSUE06611	1 year	2025-07-07	SIP-AC3
Anechoic Chamber	RIKEN	SIP-AC3	MRTSUE06782	1 year	2025-12-19	SIP-AC3
Preamplifier	EMCI	EMC184045SE	MRTSUE06602	1 year	2025-10-08	SIP-AC3
Horn Antenna	Schwarzbeck	BBHA 9170	MRTSUE06599	1 year	2025-09-08	SIP-AC3
Cable	HUBER+SUHNER	SF106	MRTSUE06873	1 year	2025-12-19	SIP-AC3
Two-Line V-Network	R&S	ENV216	MRTSUE06003	1 year	2026-04-29	SIP-SR2
EMI Test Receiver	R&S	ESR3	MRTSUE06612	1 year	2026-04-29	SIP-SR2
Thermohygrometer	testo	608-H1	MRTSUE06621	1 year	2025-10-29	SIP-SR2
Shielding Room	MIX-BEP	SIP-SR2	MRTSUE06949	5 years	2029-10-13	SIP-SR2
USB Power Sensor	Keysight	U2021XA	MRTSUE06596	1 year	2025-07-23	SIP-TR1
Signal Analyzer	Keysight	N9010B	MRTSUE07036	1 year	2026-01-21	SIP-TR1
Thermohygrometer	testo	608-H1	MRTSUE11022	1 year	2025-10-16	SIP-TR1
Attenuator	MVE	MVE2213	MRTSUE11111	1 year	2025-08-01	SIP-TR1

Software	Version	Function
e3	230711	EMI Test Software
Agilent Power Analyzer/Agilent Power Panel	V R03.09.00	Power
Controller_MF 7802BS	1.02	RE Antenna & Turntable

5. Decision Rules and Measurement Uncertainty

5.1. Decision Rules

The Decision Rule is based on Simple Acceptance in accordance with ISO Guide 98-4: 2012 Clause 8.2. (Measurement uncertainty is not taken into account when stating conformity with a specified requirement.)

5.2. Measurement Uncertainty

Where relevant, the following test uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2. This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k = 2.

AC Conducted Emission Measurement
The maximum measurement uncertainty is evaluated as: 9kHz~150kHz: 3.58dB 150kHz~30MHz: 3.20dB
Radiated Emission Measurement
The maximum measurement uncertainty is evaluated as: Coaxial: 9kHz~30MHz: 2.35dB Coplanar: 9kHz~30MHz: 2.37dB Horizontal: 30MHz~200MHz: 3.47dB 200MHz~1GHz: 4.17dB 1GHz~40GHz: 4.97dB Vertical: 30MHz~200MHz: 4.07dB 200MHz~1GHz: 5.28dB 1GHz~40GHz: 4.84dB
Spurious Emissions, Conducted
Measuring Uncertainty for a Level of Confidence of 95% (U=2Uc(y)): 2.5dB
Output Power
Measuring Uncertainty for a Level of Confidence of 95% (U=2Uc(y)): 1.5dB
Power Spectrum Density
Measuring Uncertainty for a Level of Confidence of 95% (U=2Uc(y)): 2.5dB
Occupied Bandwidth
Measuring Uncertainty for a Level of Confidence of 95% (U=2Uc(y)): 3.2%

6. Test Result

6.1. Summary

FCC Section(s)	Test Description	Test Condition	Verdict
15.247(a)(2)	6dB Bandwidth	Conducted	Pass
15.247(b)(3)	Output Power		Pass
15.247(e)	Power Spectral Density		Pass
15.247(d)	Band Edge / Out-of-Band Emissions		Pass
15.205 15.209	General Field Strength (Restricted Bands and Radiated Emission)	Radiated	Pass
15.207	AC Conducted Emissions 150kHz - 30MHz	Line Conducted	Pass

Notes:

1. The analyzer plots shown in this section were captured using a correction table to account for cable and attenuator losses in the system connecting the EUT to the analyzer across relevant frequencies.
2. For radiated emission test, every axis (X, Y, Z) was also verified. The test results shown in the following sections represent the worst-case emissions.

6.2. 6dB Bandwidth Measurement

6.2.1. Test Limit

The minimum 6dB bandwidth shall be at least 500 kHz.

6.2.2. Test Procedure

ANSI C63.10-2020 - Section 11.8

6.2.3. Test Setting

1. The Spectrum's automatic bandwidth measurement capability was used to perform the 6dB bandwidth measurement. The "X" dB bandwidth parameter was set to X = 6. The bandwidth measurement was not influenced by any intermediate power nulls in the fundamental emission.
2. Set RBW = 100 kHz
3. VBW ≥ 3 × RBW
4. Detector = Peak
5. Trace mode = Max hold
6. Sweep = Auto couple
7. Allow the trace to stabilize

6.2.4. Test Setup

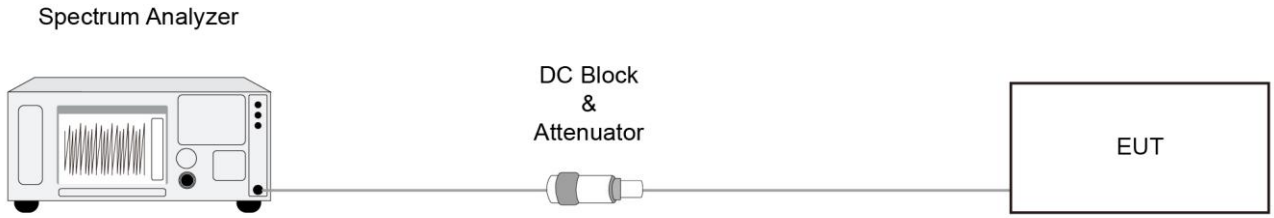

6.2.5. Test Result

Refer to Appendix A.2.

6.3. Output Power Measurement

6.3.1. Test Limit

The maximum output power shall be less 1 Watt (30dBm).

The conducted output power limit specified in paragraph FCC Part 15.247(b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. If transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs FCC Part 15.247(b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

6.3.2. Test Procedure

ANSI C63.10-2020 - Section 11.9.1.3

ANSI C63.10-2020 - Section 11.9.2.3.2

6.3.3. Test Setting

Method PKPM1 (Peak Power Measurement of Signals with DTS BW ≤ 50MHz)

Peak power measurements were performed only when the EUT was transmitting at its maximum power control level using a broadband power meter with a pulse sensor. The pulse sensor employs a VBW = 50MHz so this method was only used for signals whose DTS bandwidth was less than or equal to 50MHz.

Average Power Measurement

Average power measurements were performed only when the EUT was transmitting at its maximum power control level using a broadband power meter with a pulse sensor. The power meter implemented triggering and gating capabilities which were set up such that power measurements were recorded only during the ON time of the transmitter.

6.3.4. Test Setup

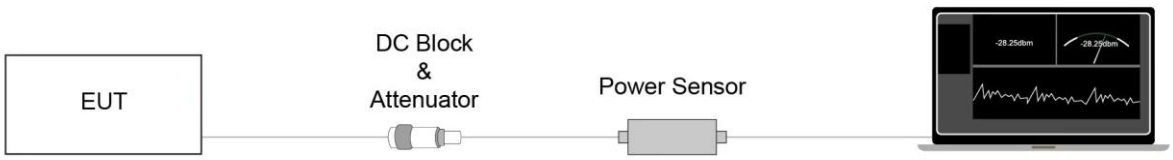

6.3.5. Test Result

Refer to Appendix A.3.

6.4. Power Spectral Density Measurement

6.4.1. Test Limit

The maximum permissible power spectral density is 8dBm in any 3 kHz band.

The same method of determining the conducted output power shall be used to determine the power spectral density.

6.4.2. Test Procedure

ANSI C63.10-2020 Section 11.10.2

6.4.3. Test Setting

1. Analyzer was set to the center frequency of the DTS channel under investigation
2. Span = 1.5 times the DTS channel bandwidth
3. RBW = 3kHz
4. VBW = 10kHz
5. Detector = peak
6. Sweep time = auto couple
7. Trace mode = max hold
8. Trace was allowed to stabilize

6.4.4. Test Setup

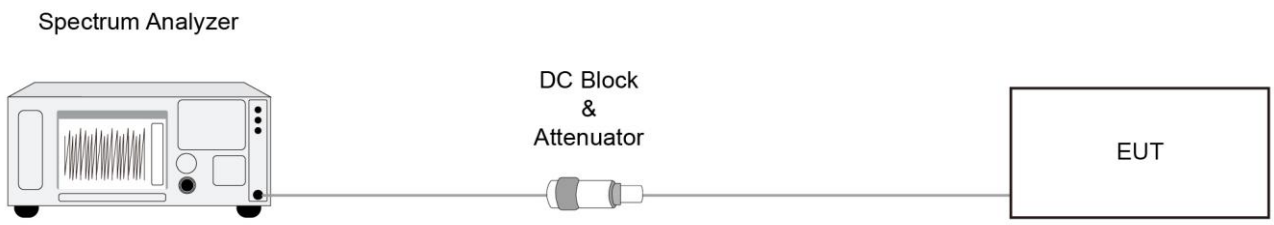

6.4.5. Test Result

Refer to Appendix A.4.

6.5. Conducted Band Edge and Out-of-Band Emissions Measurement

6.5.1. Test Limit

The limit for out-of-band spurious emissions at the band edge is 20dB below the fundamental emission level, as determined from the in-band power measurement of the DTS channel performed in a 100 kHz bandwidth per the PSD procedure.

6.5.2. Test Procedure

ANSI C63.10-2020 - Section 11.11

6.5.3. Test Settitng

Reference level measurement

1. Set instrument center frequency to DTS channel center frequency
2. Set the span to ≥ 1.5 times the DTS bandwidth
3. Set the RBW = 100 kHz
4. Set the VBW ≥ 3 x RBW
5. Detector = peak
6. Sweep time = auto couple
7. Trace mode = max hold
8. Allow trace to fully stabilize

Emission level measurement

1. Set the center frequency and span to encompass frequency range to be measured
2. RBW = 100kHz
3. VBW = 300kHz
4. Detector = Peak
5. Trace mode = max hold
6. Sweep time = auto couple
7. The trace was allowed to stabilize

6.5.4. Test Setup

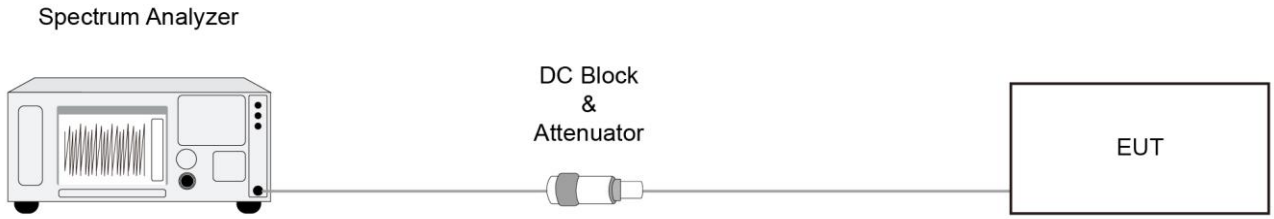

6.5.5. Test Result

Refer to Appendix A.5.

6.6. Radiated Spurious Emission Measurement

6.6.1. Test Limit

All out of band emissions appearing in a restricted band as specified in Section 15.205 of the Title 47 CFR must not exceed the limits shown in Table per Section 15.209.

FCC Part 15 Subpart C Paragraph 15.209		
Frequency [MHz]	Field Strength [μV/m]	Measured Distance [Meters]
0.009 - 0.490	2400/F (kHz)	300
0.490 - 1.705	24000/F (kHz)	30
1.705 - 30	30	30
30 - 88	100	3
88 - 216	150	3
216 - 960	200	3
Above 960	500	3

6.6.2. Test Procedure

ANSI C63.10-2020 - Section 11.11 & 11.12

ANSI C63.10-2020 - Section 6.3 (General Requirements)

ANSI C63.10-2020 - Section 6.4 (Standard test method below 30MHz)

ANSI C63.10-2020 - Section 6.5 (Standard test method above 30MHz to 1GHz)

ANSI C63.10-2020 - Section 6.6 (Standard test method above 1GHz)

6.6.3. Test Setting

Table 1 - RBW as a function of frequency

Frequency	RBW
9 ~ 150 kHz	200 ~ 300 Hz
0.15 ~ 30 MHz	9 ~ 10 kHz
30 ~ 1000 MHz	100 ~ 120 kHz
> 1000MHz	1MHz

Quasi-Peak Measurements below 1GHz

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. Span was set greater than 1MHz
3. RBW = as specified in Table 1
4. Detector = CISPR quasi-peak
5. Sweep time = auto couple
6. Trace was allowed to stabilize

Peak Measurements above 1GHz

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 1MHz
3. VBW = 3MHz
4. Detector = Peak
5. Sweep time = Auto couple
6. Trace mode = Max hold
7. Trace was allowed to stabilize

Average Measurements above 1GHz (Method VB)

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 1MHz
3. VBW; If the EUT is configured to transmit with duty cycle ≥ 98%, set VBW = 10 Hz.

   If the EUT duty cycle is < 98%, set VBW ≥ 1/T. T is the minimum transmission duration.

Radio 0 & Radio 1:

BLE 1Mbps	2.7kHz	BLE 2Mbps	5.1kHz	--	--

4. Detector = Peak
5. Sweep time = auto
6. Trace mode = max hold
7. Trace was allowed to stabilize

6.6.4. Test Setup

Below 30MHz Test Setup:

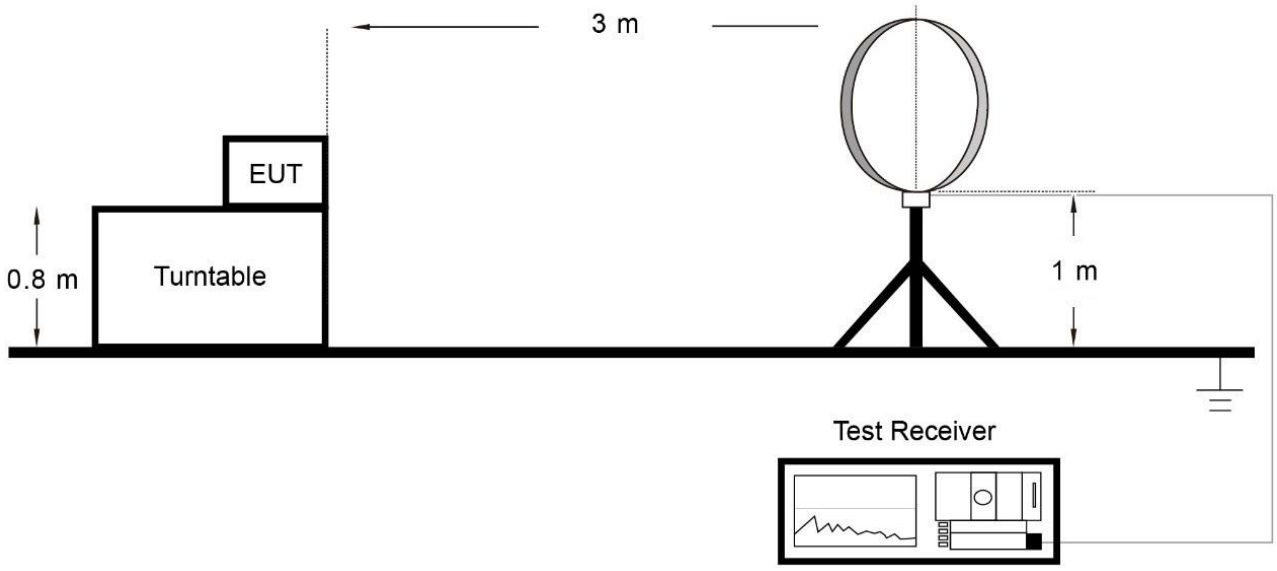

Below 1GHz Test Setup:

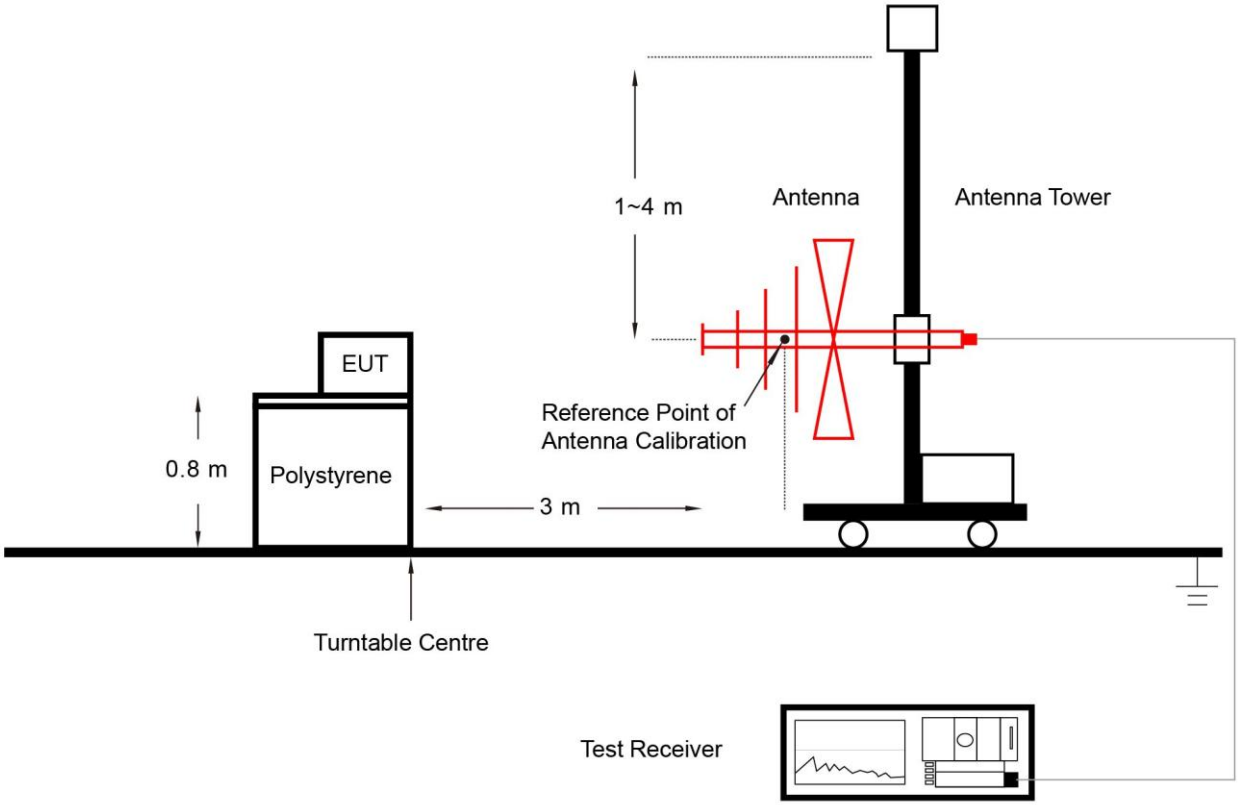

Above 1GHz Test Setup:

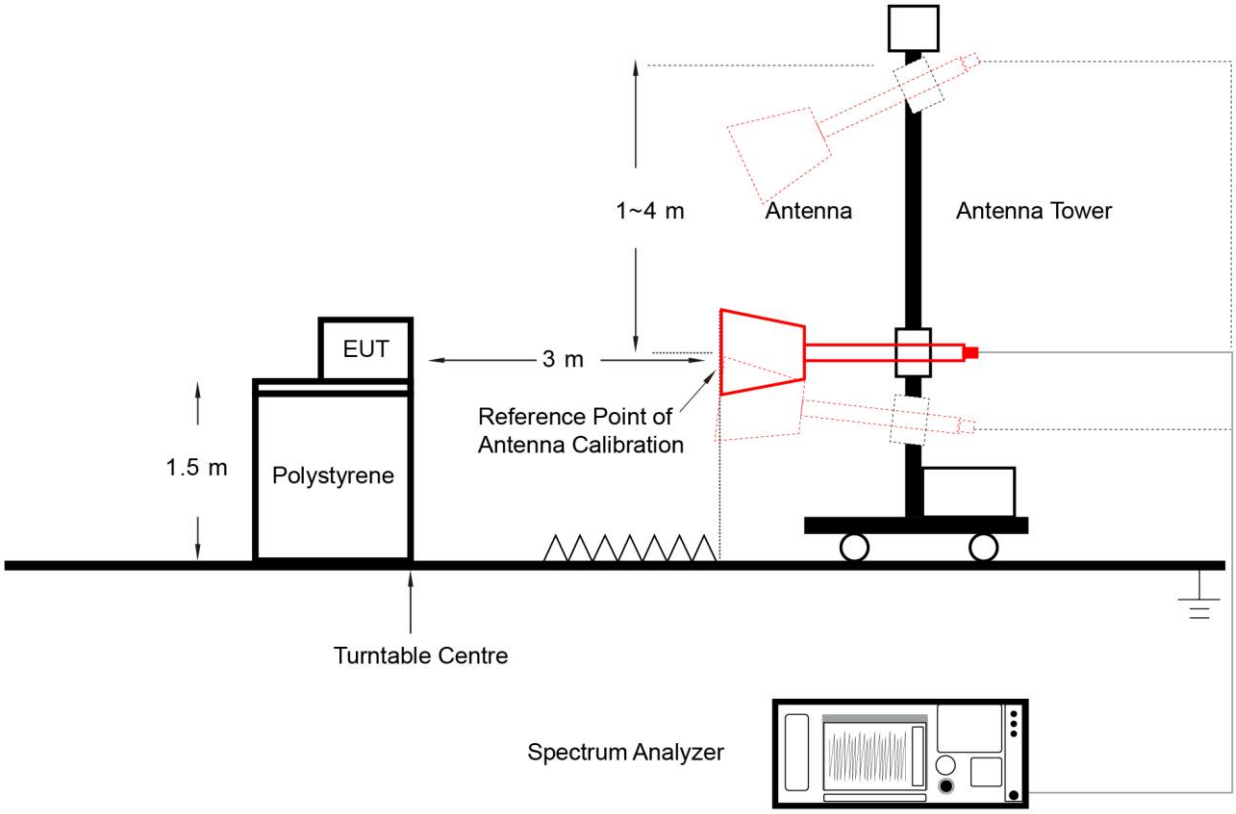

6.6.5. Test Result

Refer to Appendix A.6.

6.7. Radiated Restricted Band Edge Measurement

6.7.1. Test Limit

For 15.205 requirement:

Radiated emissions which fall in the restricted bands, as defined in Section 15.205(a) of FCC part 15, must also comply with the radiated emission limits specified in Section 15.209(a).

Frequency (MHz)	Frequency (MHz)	Frequency (MHz)	Frequency (GHz)
0.090 - 0.110	16.42 - 16.423	399.9 - 410	4.5 - 5.15
[1] 0.495 - 0.505	16.69475 - 16.69525	608 - 614	5.35 - 5.46
2.1735 - 2.1905	16.80425 - 16.80475	960 - 1240	7.25 - 7.75
4.125 - 4.128	25.5 - 25.67	1300 - 1427	8.025 - 8.5
4.17725 - 4.17775	37.5 - 38.25	1435 - 1626.5	9.0 - 9.2
4.20725 - 4.20775	73 - 74.6	1645.5 - 1646.5	9.3 - 9.5
6.215 - 6.218	74.8 - 75.2	1660 - 1710	10.6 - 12.7
6.26775 - 6.26825	108 - 121.94	1718.8 - 1722.2	13.25 - 13.4
6.31175 - 6.31225	123 - 138	2200 - 2300	14.47 - 14.5
8.291 - 8.294	149.9 - 150.05	2310 - 2390	15.35 - 16.2
8.362 - 8.366	156.52475 - 156.52525	2483.5 - 2500	17.7 - 21.4
8.37625 - 8.38675	156.7 - 156.9	2690 - 2900	22.01 - 23.12
8.41425 - 8.41475	162.0125 - 167.17	3260 - 3267	23.6 - 24.0
12.29 - 12.293	167.72 - 173.2	3332 - 3339	31.2 - 31.8
12.51975 - 12.52025	240 - 285	3345.8 - 3358	36.43 - 36.5
12.57675 - 12.57725	322 - 335.4	3600 - 4400	([2])
13.36 - 13.41	--	--	--

All out of band emissions appearing in a restricted band as specified in Section 15.205 of the Title 47CFR must not exceed the limits shown in Table per Section 15.209.

FCC Part 15 Subpart C Paragraph 15.209		
Frequency [MHz]	Field Strength [μV/m]	Measured Distance [Meters]
0.009 - 0.490	2400/F (kHz)	300
0.490 - 1.705	24000/F (kHz)	30
1.705 - 30	30	30
30 - 88	100	3
88 - 216	150	3
216 - 960	200	3
Above 960	500	3

6.7.2. Test Procedure

ANSI C63.10-2020 Section 6.3 & 6.6 & 11.12

6.7.3. Test Setting

Peak Field Strength Measurements

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 1MHz
3. VBW = 3MHz
4. Detector = peak
5. Sweep time = auto couple
6. Trace mode = max hold
7. Trace was allowed to stabilize

Average Field Strength Measurements

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 1MHz
3. VBW; If the EUT is configured to transmit with duty cycle ≥ 98%, set VBW = 10 Hz.

   If the EUT duty cycle is < 98%, set VBW ≥ 1/T. T is the minimum transmission duration.

Radio 0 & Radio 1:

BLE 1Mbps	2.7kHz	BLE 2Mbps	5.1kHz	--	--

4. Detector = Peak
5. Sweep time = auto
6. Trace mode = max hold
7. Allow max hold to run for at least 50 times (1/duty cycle) traces

6.7.4. Test Setup

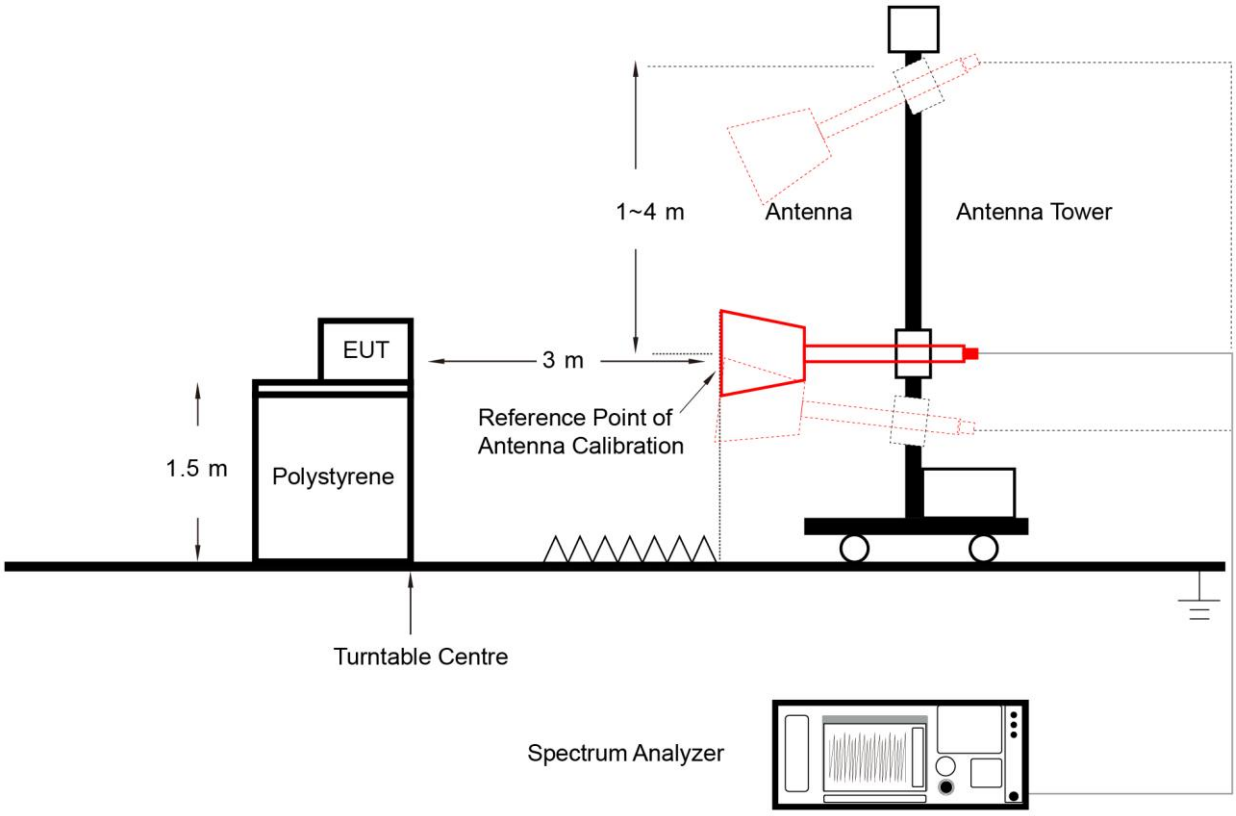

6.7.5. Test Result

Refer to Appendix A.7.

6.8. AC Conducted Emissions Measurement

6.8.1. Test Limit

FCC Part 15 Subpart C Paragraph 15.207 Limits		
Frequency (MHz)	QP (dBμV)	AV (dBμV)
0.15 - 0.50	66 - 56	56 - 46
0.50 - 5.0	56	46
5.0 - 30	60	50
Note 1: The lower limit shall apply at the transition frequencies. Note 2: The limit decreases linearly with the logarithm of the frequency in the range 0.15MHz to 0.5MHz.		

6.8.2. Test Setup

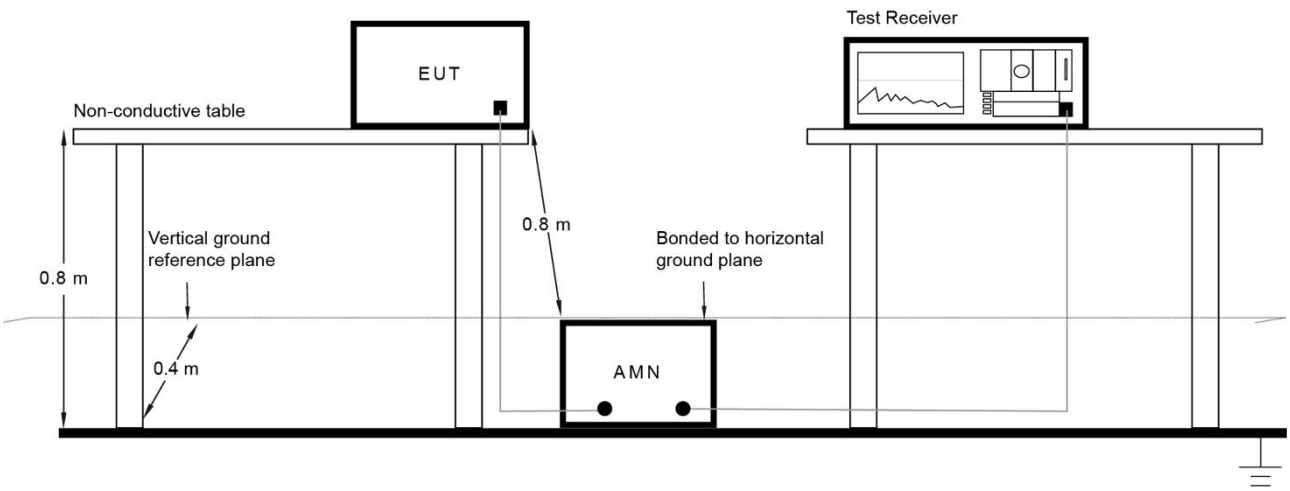

6.8.3. Test Result

Refer to Appendix A.8.

Appendix A - Test Result

A.1 Duty Cycle Test Result

Please refer to Appendix D, section A.1 for the original test data.

A.2 6dB Bandwidth Test Result

Please refer to Appendix D, section A.2 for the original test data.

Spot Check:

Test Site	SIP-TR1	Test Engineer	Alan Yu
Test Date	2025-06-30	Radio	0

Test Mode	Data Rate	Channel No.	Frequency (MHz)	6dB Bandwidth (MHz)	Limit (MHz)
BLE	1Mbps	39	2480	0.7149	≥ 0.5

BLE-1Mbps 6dB Bandwidth	
Channel 39 (2480MHz)	
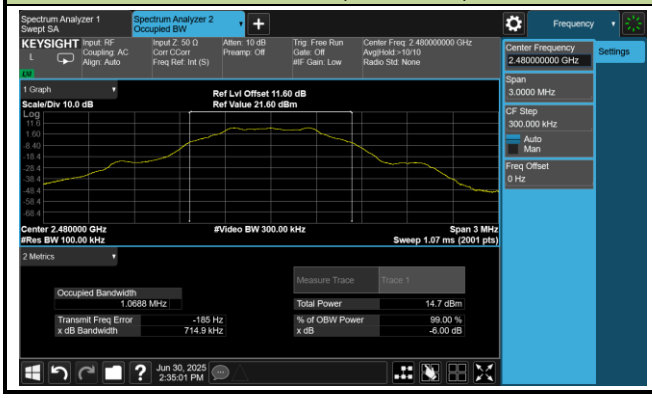	

Test Site	SIP-TR1	Test Engineer	Alan Yu
Test Date	2025-06-30	Radio	1

Test Mode	Data Rate	Channel No.	Frequency (MHz)	6dB Bandwidth (MHz)	Limit (MHz)
BLE	2Mbps	19	2440	1.248	≥ 0.5

BLE-2Mbps 6dB Bandwidth	
Channel 19 (2440MHz)	

A.3 Output Power Test Result

Please refer to Appendix D, section A.3 for the original test data.

Spot Check:

Test Site	SIP-TR1	Test Engineer	Alan Yu
Test Date	2025-06-30	Radio	0

Test Result of Peak Output Power

Test Mode	Data Rate	Channel No.	Frequency (MHz)	Peak Power (dBm)	Power Limit (dBm)	Result
BLE	1Mbps	39	2480	8.23	≤ 30.00	Pass

Test Result of Average Output Power (Reporting Only)

Test Mode	Data Rate	Channel No.	Frequency (MHz)	Average Power (dBm)	Power Limit (dBm)	Result
BLE	1Mbps	39	2480	7.49	≤ 30.00	Pass

Test Site	SIP-TR1	Test Engineer	Alan Yu
Test Date	2025-06-30	Radio	1

Test Result of Peak Output Power

Test Mode	Data Rate	Channel No.	Frequency (MHz)	Peak Power (dBm)	Power Limit (dBm)	Result
BLE	2Mbps	19	2440	8.29	≤ 30.00	Pass

Test Result of Average Output Power (Reporting Only)

Test Mode	Data Rate	Channel No.	Frequency (MHz)	Average Power (dBm)	Power Limit (dBm)	Result
BLE	2Mbps	19	2440	7.59	≤ 30.00	Pass

A.4 Power Spectral Density Test Result

Please refer to Appendix D, section A.4 for the original test data.

Spot Check:

Test Site	SIP-TR1	Test Engineer	Alan Yu
Test Date	2025-06-30	Radio	0

Test Mode	Data Rate	Channel No.	Frequency (MHz)	PSD Result (dBm / 3kHz)	Limit (dBm / 3kHz)	Result
BLE	1Mbps	39	2480	-5.53	≤ 8.00	Pass

BLE-1Mbps PSD	
Channel 39 (2480MHz)	
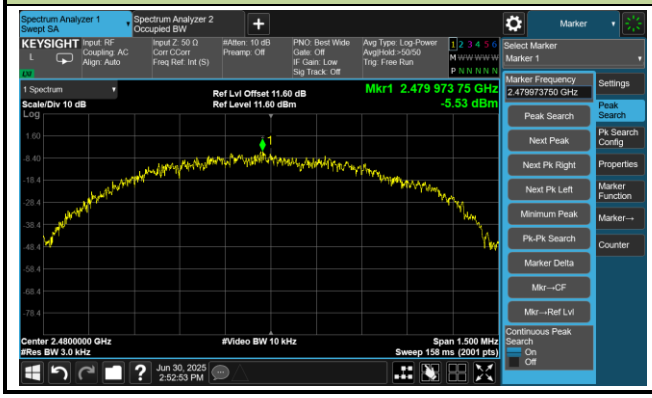	

Test Site	SIP-TR1	Test Engineer	Alan Yu
Test Date	2025-06-30	Radio	1

Test Mode	Data Rate	Channel No.	Frequency (MHz)	PSD Result (dBm / 3kHz)	Limit (dBm / 3kHz)	Result
BLE	2Mbps	19	2440	-9.22	≤ 8.00	Pass

BLE-2Mbps PSD	
Channel 19 (2440MHz)	
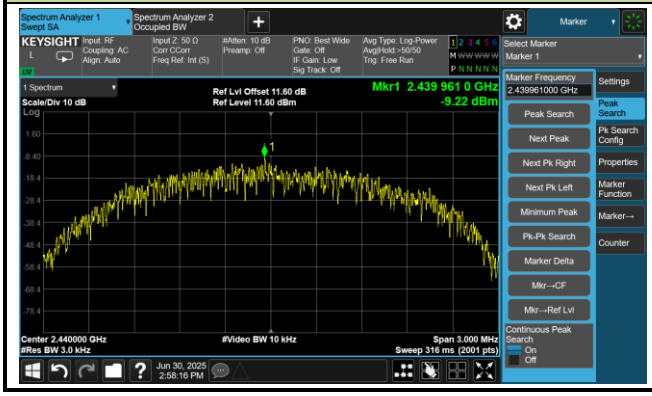	

A.5 Conducted Band Edge and Out-of-Band Emissions Test Result

Please refer to Appendix D, section A.5 for the original test data.

Spot Check:

Test Site	SIP-TR1	Test Engineer	Alan Yu
Test Date	2025-06-30	Radio	0

Test Mode	Data Rate / Mbps	Channel No.	Frequency (MHz)	Limit	Result
BLE	1	39	2480	20	Pass

BLE-1Mbps Out-of-Band Emissions	
Channel 39 (2480MHz)	
100kHz PSD Reference Level	High Band Edge
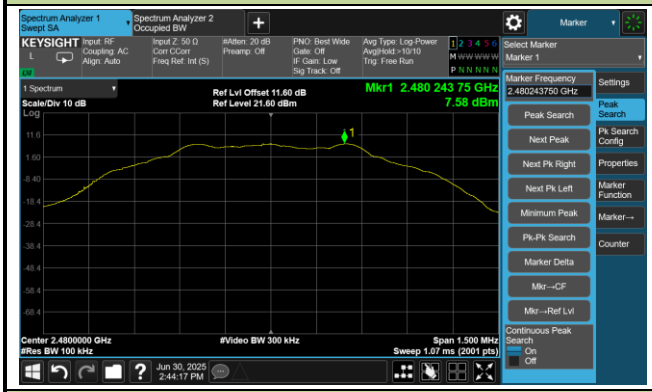	
Spurious Emission 30MHz ~ 25GHz	
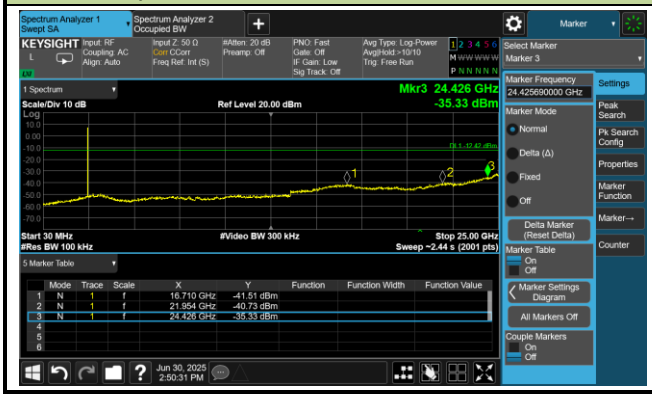	

Test Site	SIP-TR1	Test Engineer	Alan Yu
Test Date	2025-06-30	Radio	1

Test Mode	Data Rate / Mbps	Channel No.	Frequency (MHz)	Limit	Result
BLE	2	19	2440	20	Pass

BLE-2Mbps Out-of-Band Emissions	
Channel 19 (2440MHz)	
100kHz PSD Reference Level	Spurious Emission 30MHz ~ 25GHz
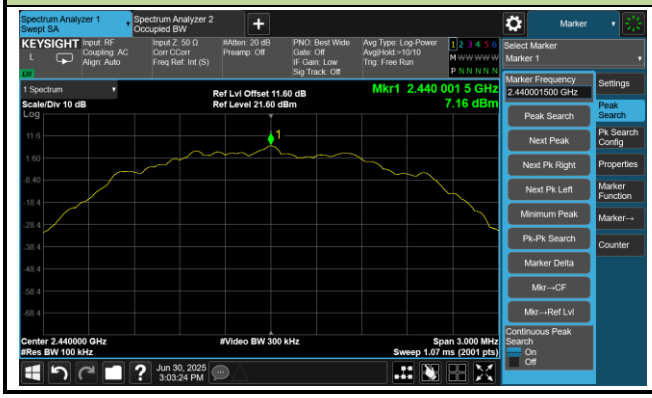	

A.6 Radiated Spurious Emission Test Result

Please refer to Appendix D, section A.6 for the original test data.

Spot Check:

Radio 0:

Test Site	SIP-AC3	Test Engineer	Justin Guo
Test Date	2025-06-08	Test Mode	BLE-1Mbps
Remark:	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Test Channel	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
39	7675.90	47.89	-2.05	45.84	74.00	-28.16	Peak	Horizontal
	8170.60	48.03	-1.53	46.50	74.00	-27.50	Peak	Horizontal
	11983.70	47.37	-0.03	47.34	74.00	-26.66	Peak	Horizontal
	7592.60	48.28	-2.37	45.91	74.00	-28.09	Peak	Vertical
	8412.00	47.60	-1.40	46.20	74.00	-27.80	Peak	Vertical
	12080.60	47.85	0.10	47.95	74.00	-26.05	Peak	Vertical

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

The Result of Radiated Emission below 1GHz:

Site	SIP-AC3	Test Date	2025-06-03
Temperature	24.3 °C	Humidity	65.2 %
Limit	FCC_Part15.209_RSE(3m)	Test Engineer	Justin Guo
Factor	VULB 9168_00997	Polarity	Horizontal
EUT	HPE Aruba User Experience Sensor	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by BLE_1M at 2480MHz		

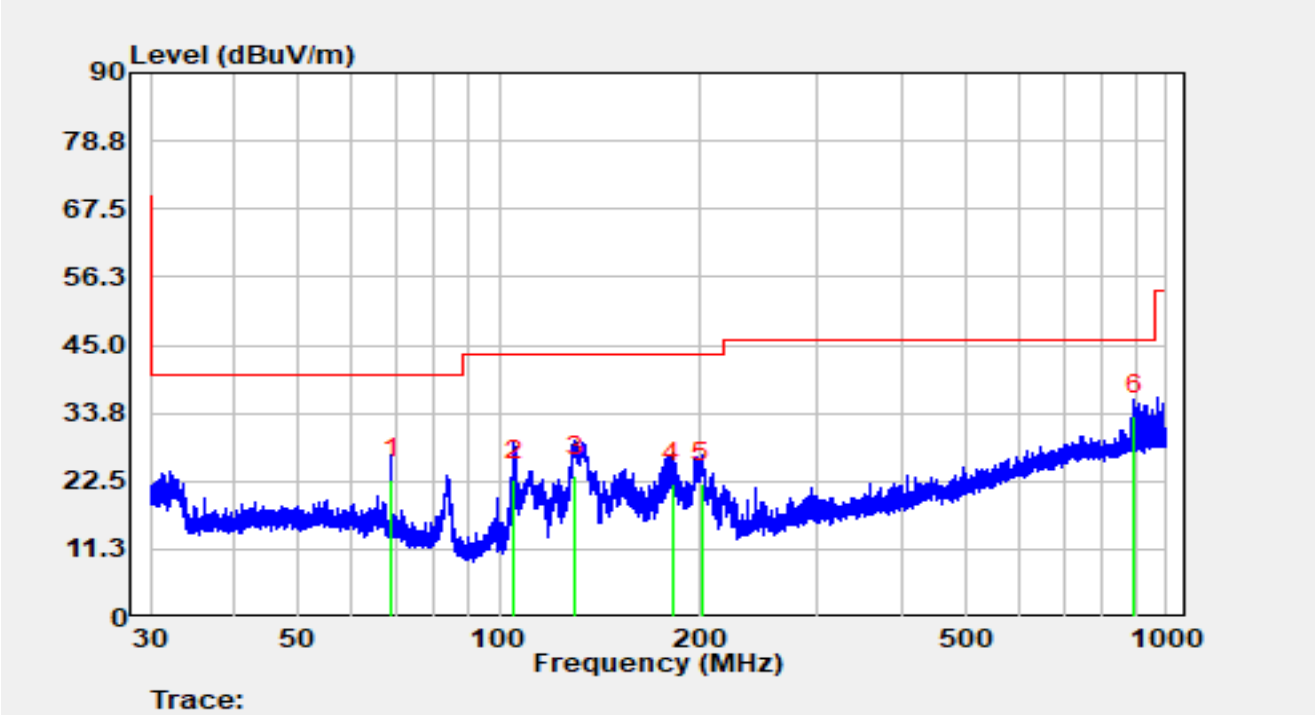

No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		68.872	6.33	16.55	22.88	-17.12	40.00	QP
2		105.272	7.96	14.71	22.67	-20.83	43.50	QP
3		129.786	6.41	17.01	23.42	-20.08	43.50	QP
4		181.920	5.63	16.61	22.24	-21.26	43.50	QP
5		201.534	7.11	15.10	22.21	-21.29	43.50	QP
6	*	896.368	3.66	29.73	33.39	-12.61	46.00	QP

Notes:

1. " * " indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).
4. The amplitude of radiated emissions (frequency range from 9kHz to 30MHz and 18GHz to 25GHz) is that proximity to ambient noise, which also are attenuated more than 20 dB below the permissible value. Therefore, the data is not presented in the report.

Site	SIP-AC3	Test Date	2025-06-03
Temperature	24.3 °C	Humidity	65.2 %
Limit	FCC_Part15.209_RSE(3m)	Test Engineer	Justin Guo
Factor	VULB 9168_00997	Polarity	Vertical
EUT	HPE Aruba User Experience Sensor	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by BLE_1M at 2480MHz		

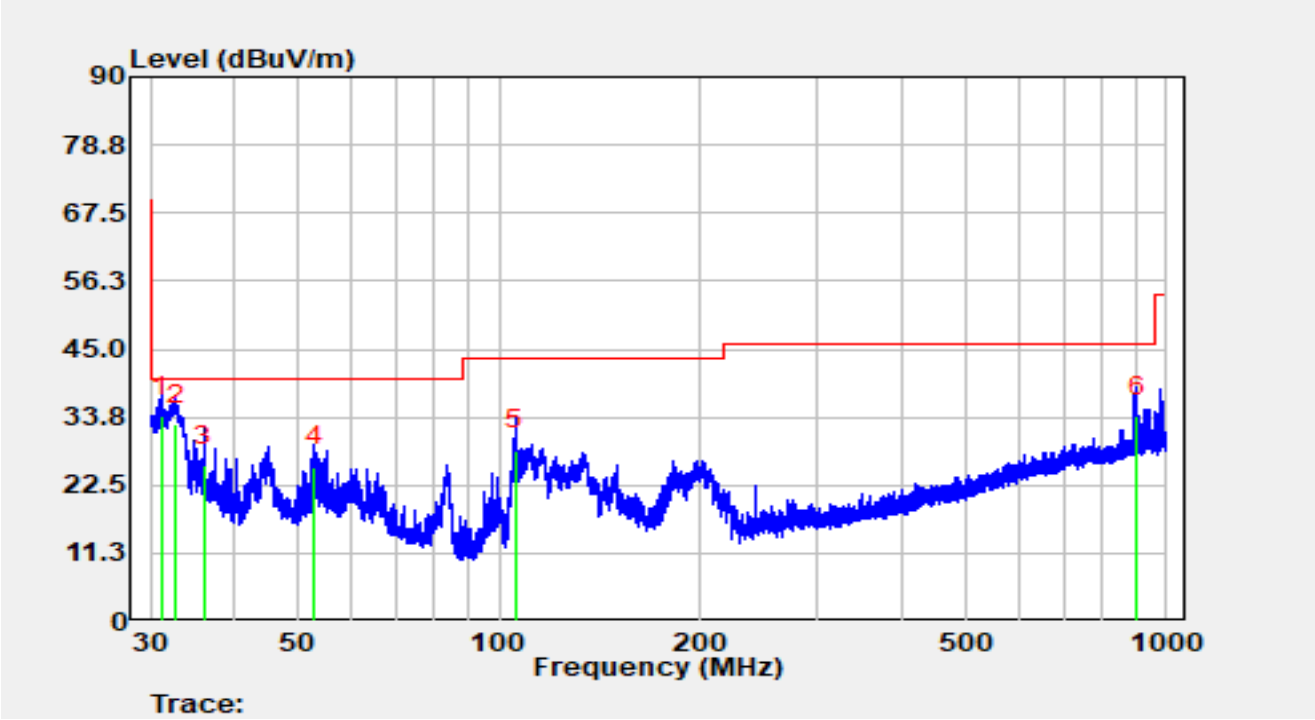

No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	31.092	16.90	17.00	33.90	-6.10	40.00	QP
2		32.749	15.40	17.05	32.45	-7.55	40.00	QP
3		36.127	8.22	17.54	25.76	-14.24	40.00	QP
4		52.779	7.00	18.60	25.60	-14.40	40.00	QP
5		105.568	13.60	14.75	28.35	-15.15	43.50	QP
6		901.095	4.10	29.79	33.89	-12.11	46.00	QP

Notes:

1. " * " indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).
4.The amplitude of radiated emissions (frequency range from 9kHz to 30MHz and 18GHz to 25GHz) is that proximity to ambient noise, which also are attenuated more than 20 dB below the permissible value. Therefore, the data is not presented in the report.

Radio 1:

Test Site	SIP-AC3	Test Engineer	Justin Guo
Test Date	2025-06-08	Test Mode	BLE-2Mbps
Remark:	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Test Channel	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
19	8058.40	48.58	-1.64	46.94	74.00	-27.06	Peak	Horizontal
	9085.20	47.73	-0.41	47.32	74.00	-26.68	Peak	Horizontal
	12085.70	47.46	0.17	47.63	74.00	-26.37	Peak	Horizontal
	8303.20	48.37	-1.48	46.89	74.00	-27.11	Peak	Vertical
	9454.10	47.68	-0.39	47.29	74.00	-26.71	Peak	Vertical
	11687.90	47.53	0.26	47.79	74.00	-26.21	Peak	Vertical

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

The Result of Radiated Emission below 1GHz:

Site	SIP-AC3	Test Date	2025-06-03
Temperature	24.3 °C	Humidity	65.2 %
Limit	FCC_Part15.209_RSE(3m)	Test Engineer	Justin Guo
Factor	VULB 9168_00997	Polarity	Horizontal
EUT	HPE Aruba User Experience Sensor	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by BLE_2M at 2440MHz		

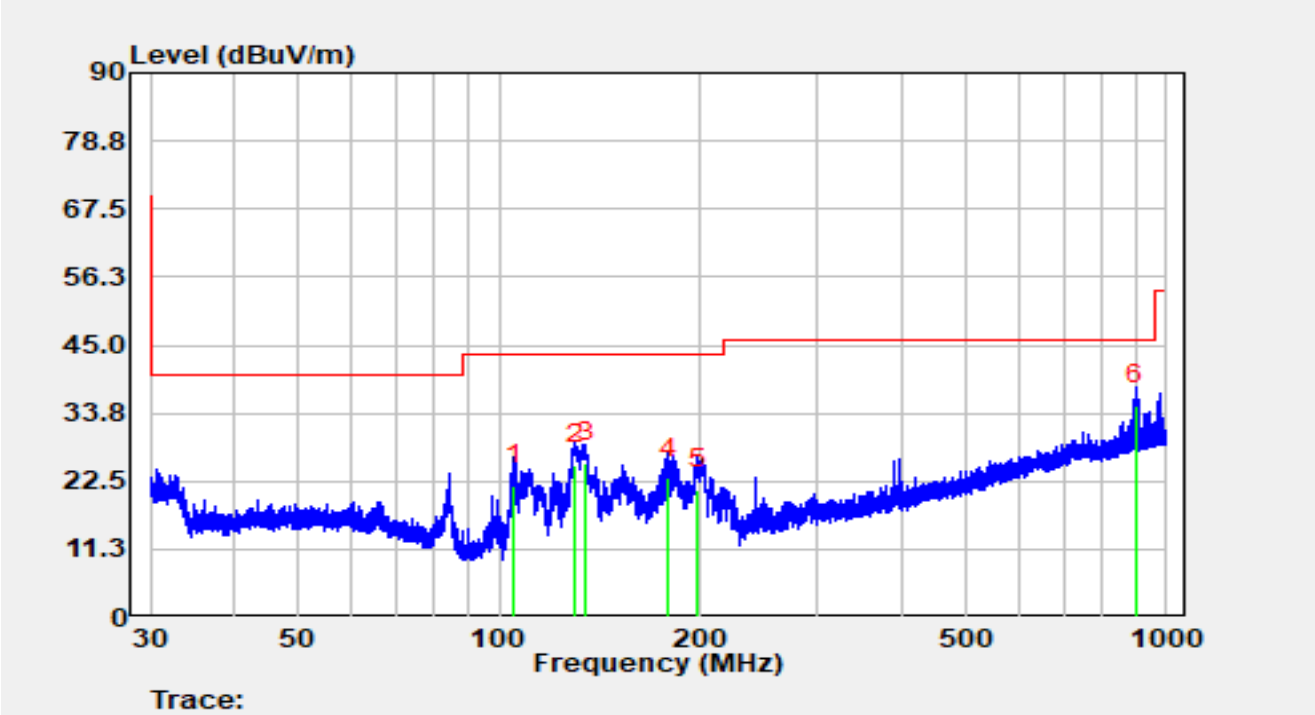

No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		105.014	7.22	14.67	21.89	-21.61	43.50	QP
2		129.740	8.22	17.00	25.22	-18.28	43.50	QP
3		134.748	8.14	17.49	25.63	-17.87	43.50	QP
4		179.198	6.11	16.91	23.02	-20.48	43.50	QP
5		198.588	5.96	15.13	21.09	-22.41	43.50	QP
6	*	898.571	5.33	29.75	35.08	-10.92	46.00	QP

Notes:

1. " * " indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).
4. The amplitude of radiated emissions (frequency range from 9kHz to 30MHz and 18GHz to 25GHz) is that proximity to ambient noise, which also are attenuated more than 20 dB below the permissible value. Therefore, the data is not presented in the report.

Site	SIP-AC3	Test Date	2025-06-03
Temperature	24.3 °C	Humidity	65.2 %
Limit	FCC_Part15.209_RSE(3m)_	Test Engineer	Justin Guo
Factor	VULB 9168_00997	Polarity	Vertical
EUT	HPE Aruba User Experience Sensor	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by BLE_2M at 2440MHz		

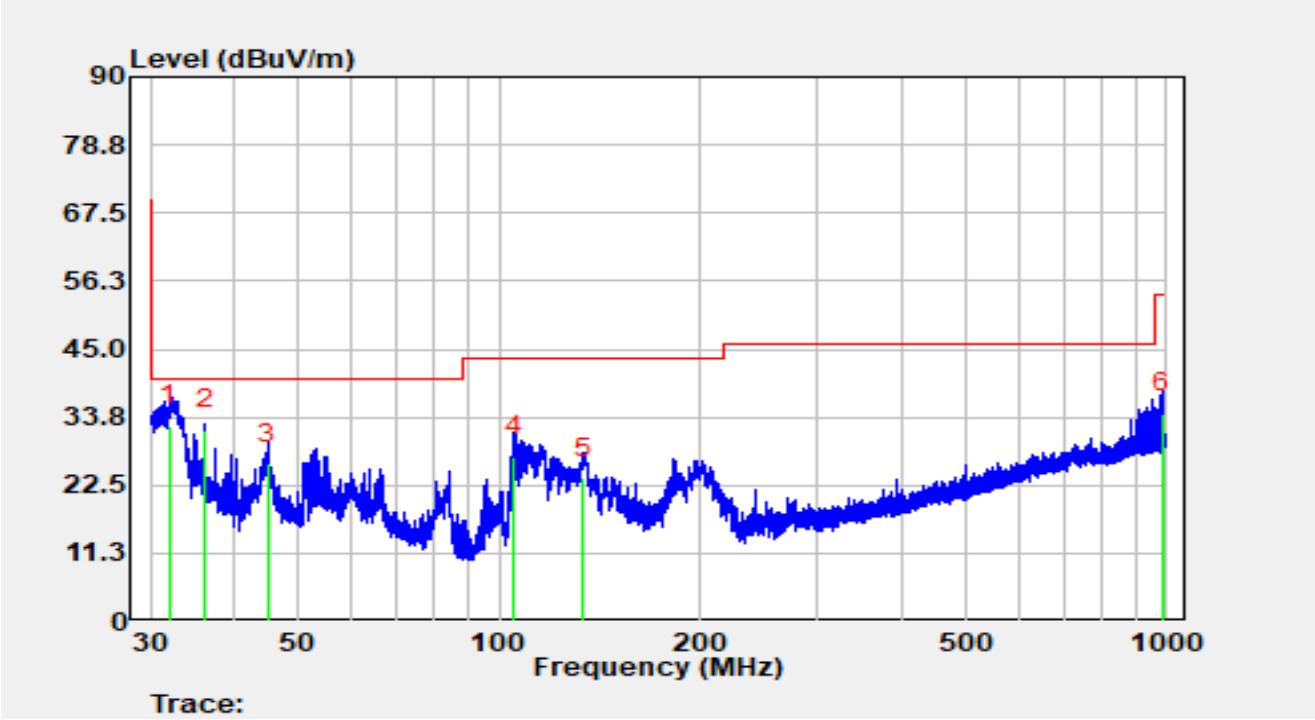

No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	32.044	15.40	16.96	32.36	-7.64	40.00	QP
2		36.191	14.20	17.55	31.75	-8.25	40.00	QP
3		45.027	7.66	18.47	26.13	-13.87	40.00	QP
4		105.383	12.50	14.73	27.23	-16.27	43.50	QP
5		133.478	6.30	17.40	23.70	-19.80	43.50	QP
6		983.309	4.20	30.24	34.44	-19.56	54.00	QP

Notes:

1. " * " indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).
4.The amplitude of radiated emissions (frequency range from 9kHz to 30MHz and 18GHz to 25GHz) is that proximity to ambient noise, which also are attenuated more than 20 dB below the permissible value. Therefore, the data is not presented in the report.

A.7 Radiated Restricted Band Edge Test Result

Please refer to Appendix D, section A.7 for the original test data.

Spot Check:

Radio 0:

Site	SIP-AC3	Test Date	2025-06-08
Temperature	24.3°C	Humidity	65.2%
Limit	FCC_Part 15_Band Edge(3m)	Test Engineer	Justin Guo
Factor	HF907_102861	Polarity	Horizontal
EUT	HPE Aruba User Experience Sensor	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by BLE_1M at 2480MHz		

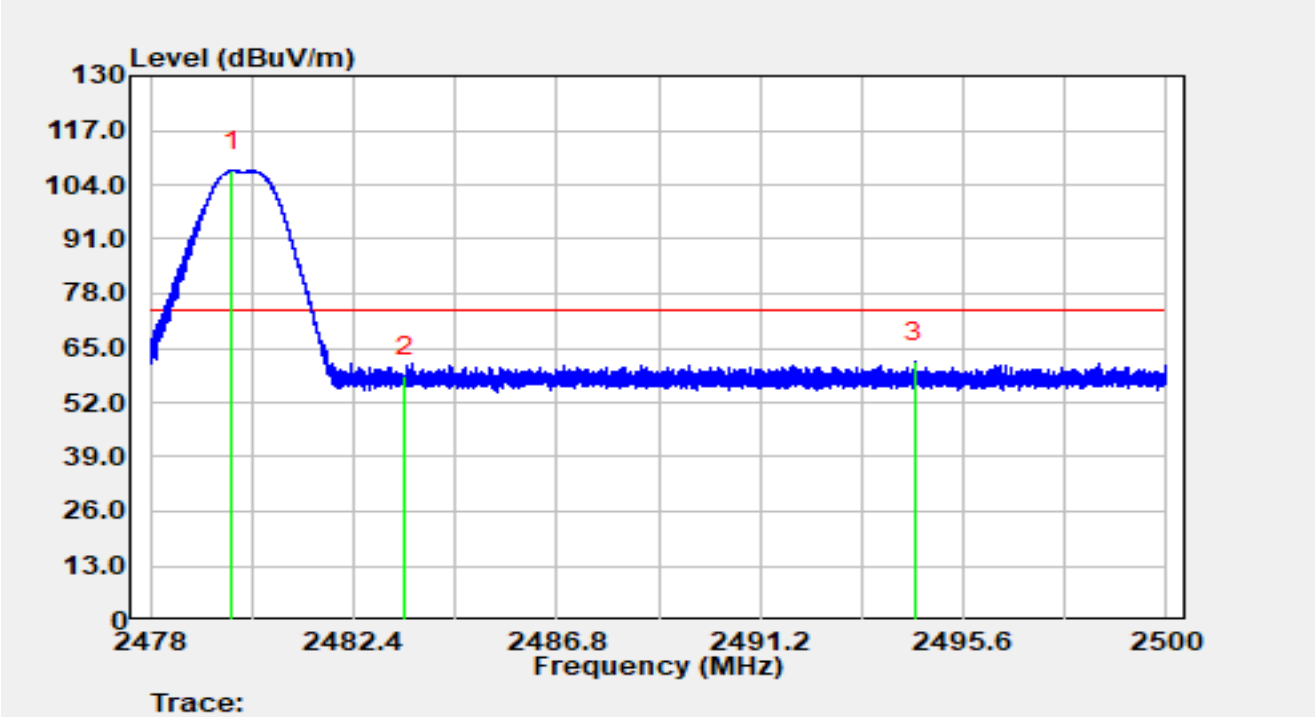

No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		2479.764	72.96	34.47	107.43	N/A	N/A	Peak
2		2483.500	23.82	34.49	58.31	-15.69	74.00	Peak
3	*	2494.559	27.14	34.54	61.69	-12.31	74.00	Peak

Notes:

1. " * " indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-06-08
Temperature	24.3°C	Humidity	65.2%
Limit	FCC_Part 15_Band Edge(3m)	Test Engineer	Justin Guo
Factor	HF907_102861	Polarity	Horizontal
EUT	HPE Aruba User Experience Sensor	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by BLE_1M at 2480MHz		

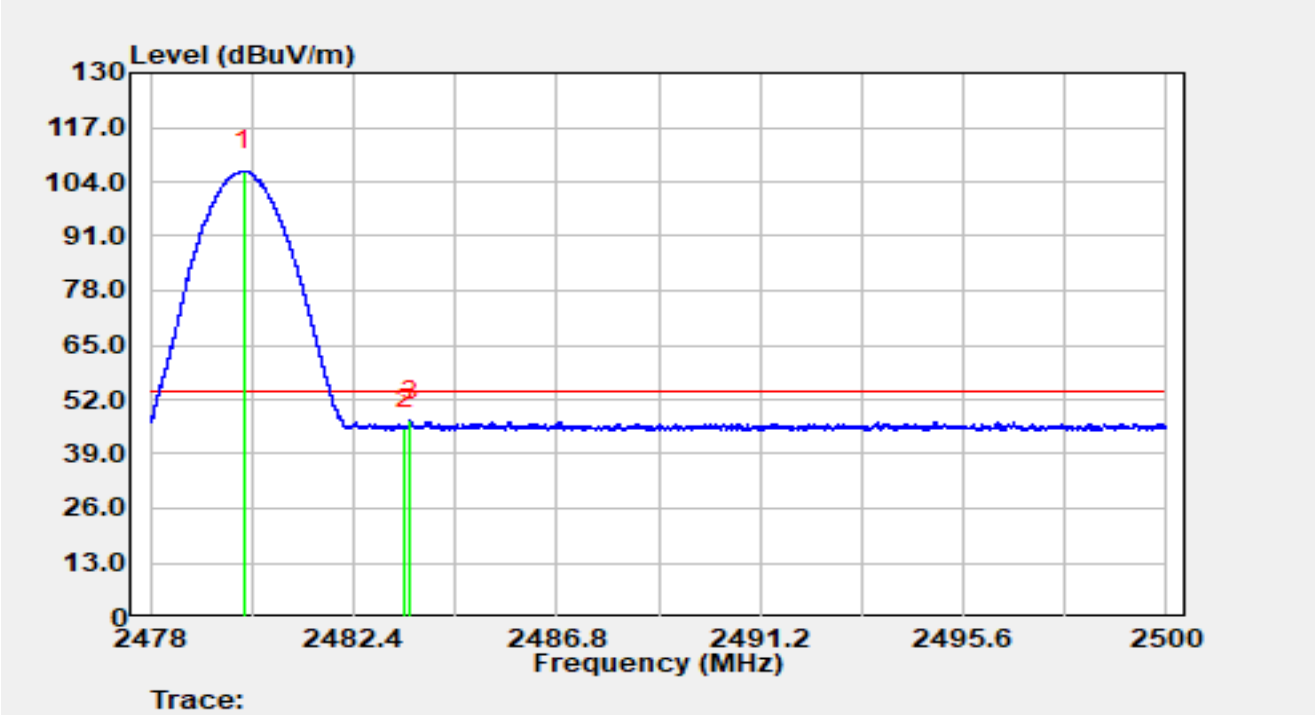

No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		2480.011	72.03	34.48	106.51	N/A	N/A	Average
2		2483.500	10.42	34.49	44.91	-9.09	54.00	Average
3	*	2483.634	12.48	34.49	46.97	-7.03	54.00	Average

Notes:

1. " * " indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-06-08
Temperature	24.3°C	Humidity	65.2%
Limit	FCC_Part 15_Band Edge(3m)	Test Engineer	Justin Guo
Factor	HF907_102861	Polarity	Vertical
EUT	HPE Aruba User Experience Sensor	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by BLE_1M at 2480MHz		

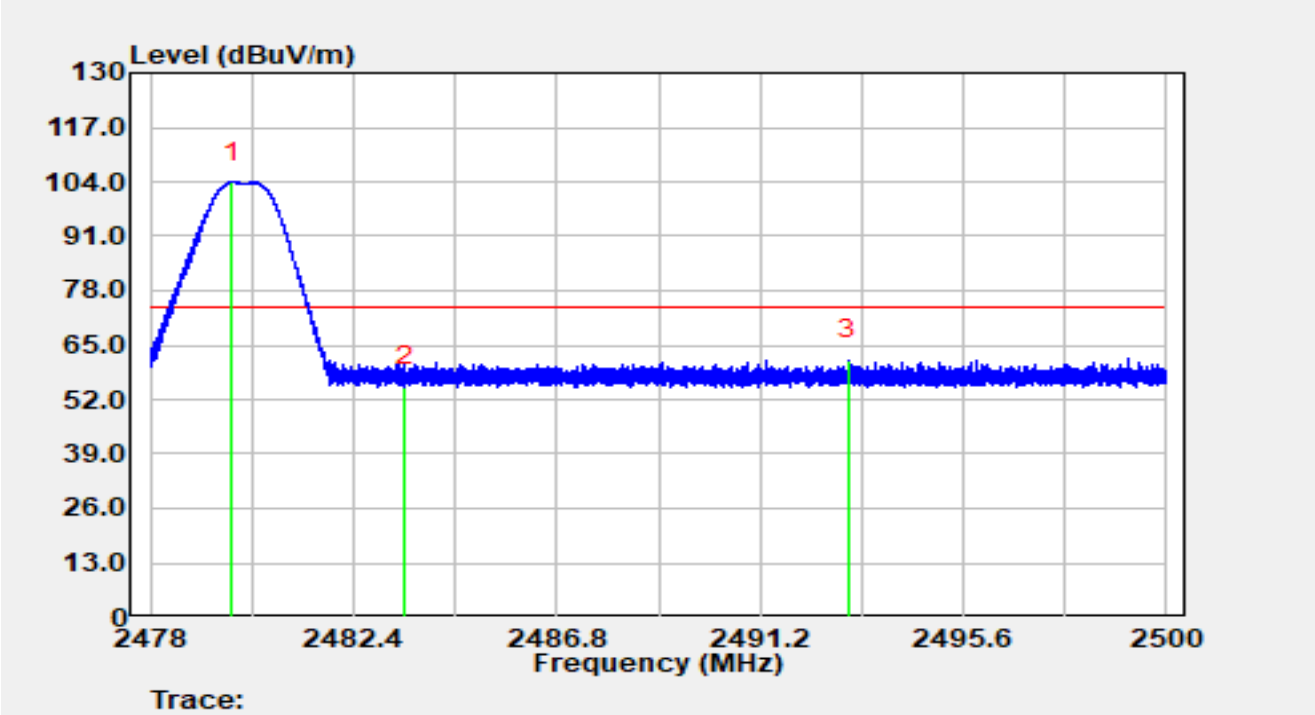

No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		2479.767	69.49	34.47	103.96	N/A	N/A	Peak
2		2483.500	20.61	34.49	55.10	-18.90	74.00	Peak
3	*	2493.114	27.02	34.54	61.56	-12.44	74.00	Peak

Notes:

1. " * " indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-06-08
Temperature	24.3°C	Humidity	65.2%
Limit	FCC_Part 15_Band Edge(3m)	Test Engineer	Justin Guo
Factor	HF907_102861	Polarity	Vertical
EUT	HPE Aruba User Experience Sensor	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by BLE_1M at 2480MHz		

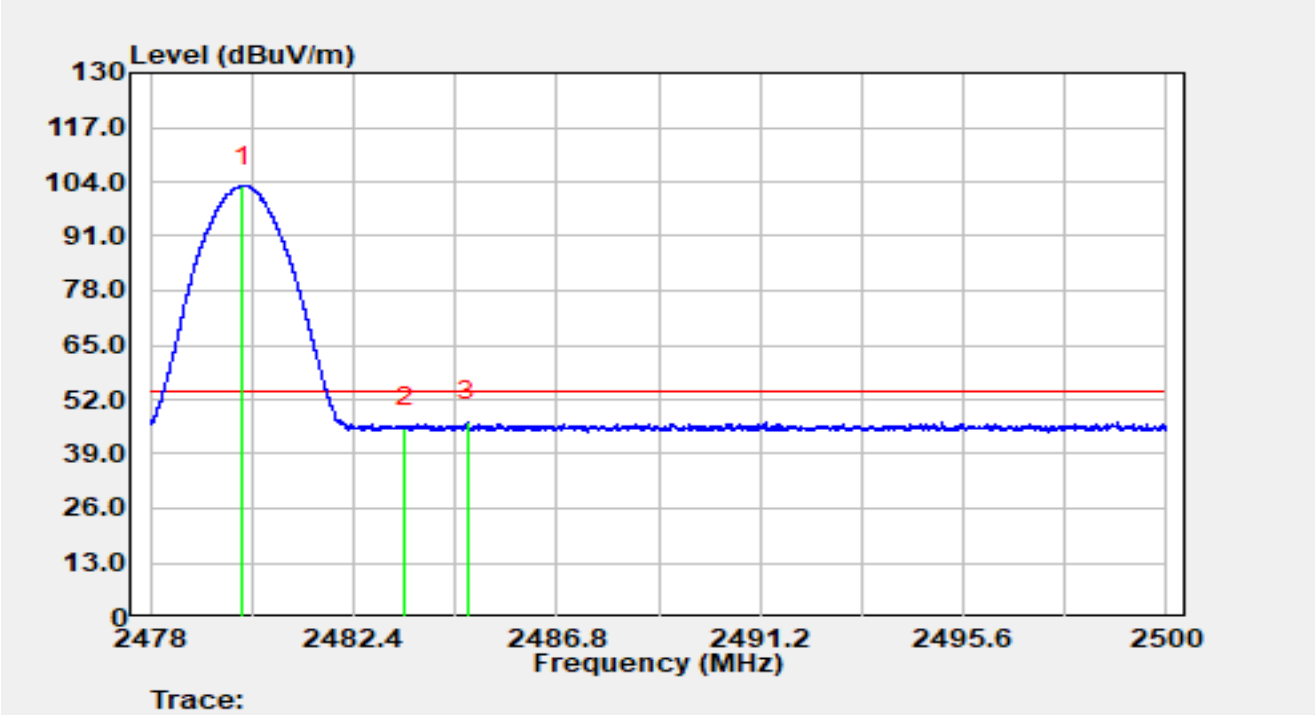

No	Mark	Frequency (MHz)	Reading (dBµV)	C.F (dB/m)	Measurement (dBµV/m)	Margin (dB)	Limit (dBµV/m)	Detector
1		2480.006	68.47	34.48	102.94	N/A	N/A	Average
2		2483.500	10.86	34.49	45.35	-8.65	54.00	Average
3	*	2484.857	12.14	34.50	46.64	-7.36	54.00	Average

Notes:

1. " * " indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBµV/m) = Reading (dBµV) + C.F (dB/m).

Radio 1:

Site	SIP-AC3	Test Date	2025-06-08
Temperature	24.3°C	Humidity	65.2%
Limit	FCC_Part 15_Band Edge(3m)	Test Engineer	Justin Guo
Factor	HF907_102861	Polarity	Horizontal
EUT	HPE Aruba User Experience Sensor	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by BLE_1M at 2480MHz		

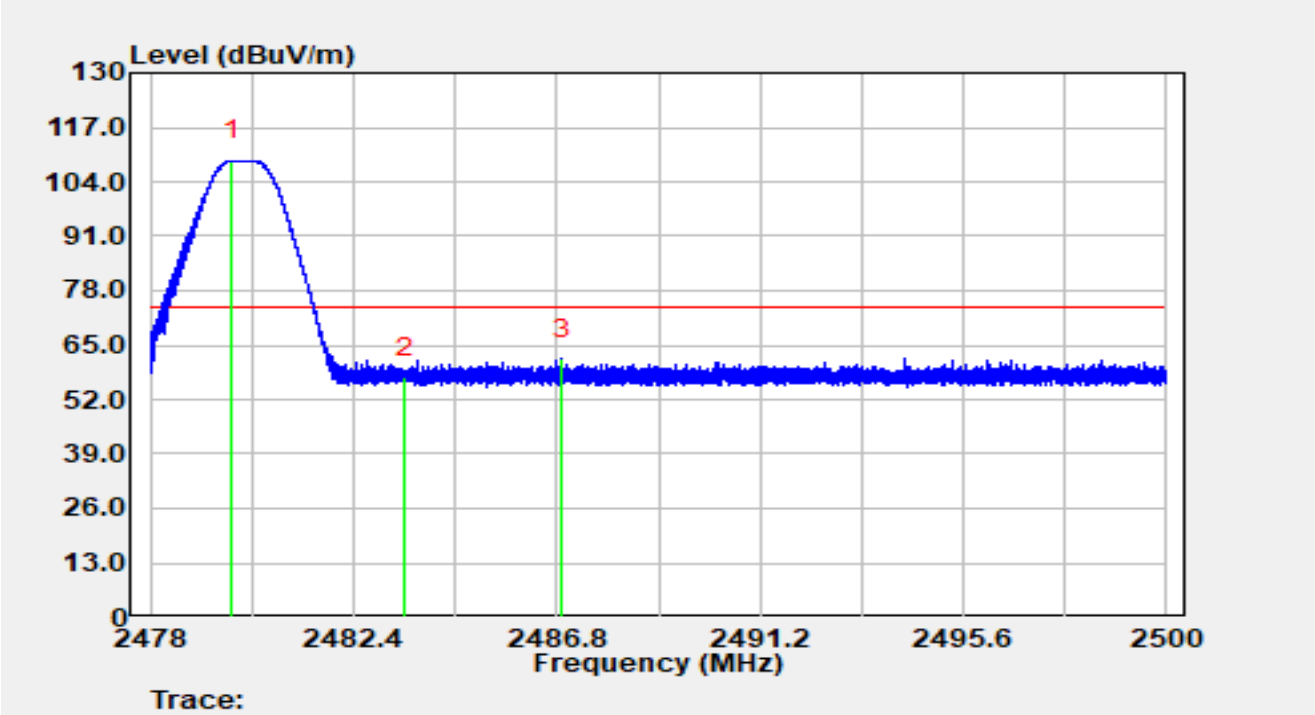

No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		2479.751	74.59	34.47	109.07	N/A	N/A	Peak
2		2483.500	22.69	34.49	57.18	-16.82	74.00	Peak
3	*	2486.899	27.26	34.51	61.77	-12.23	74.00	Peak

Notes:

1. " * " indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-06-08
Temperature	24.3°C	Humidity	65.2%
Limit	FCC_Part 15_Band Edge(3m)	Test Engineer	Justin Guo
Factor	HF907_102861	Polarity	Horizontal
EUT	HPE Aruba User Experience Sensor	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by BLE_1M at 2480MHz		

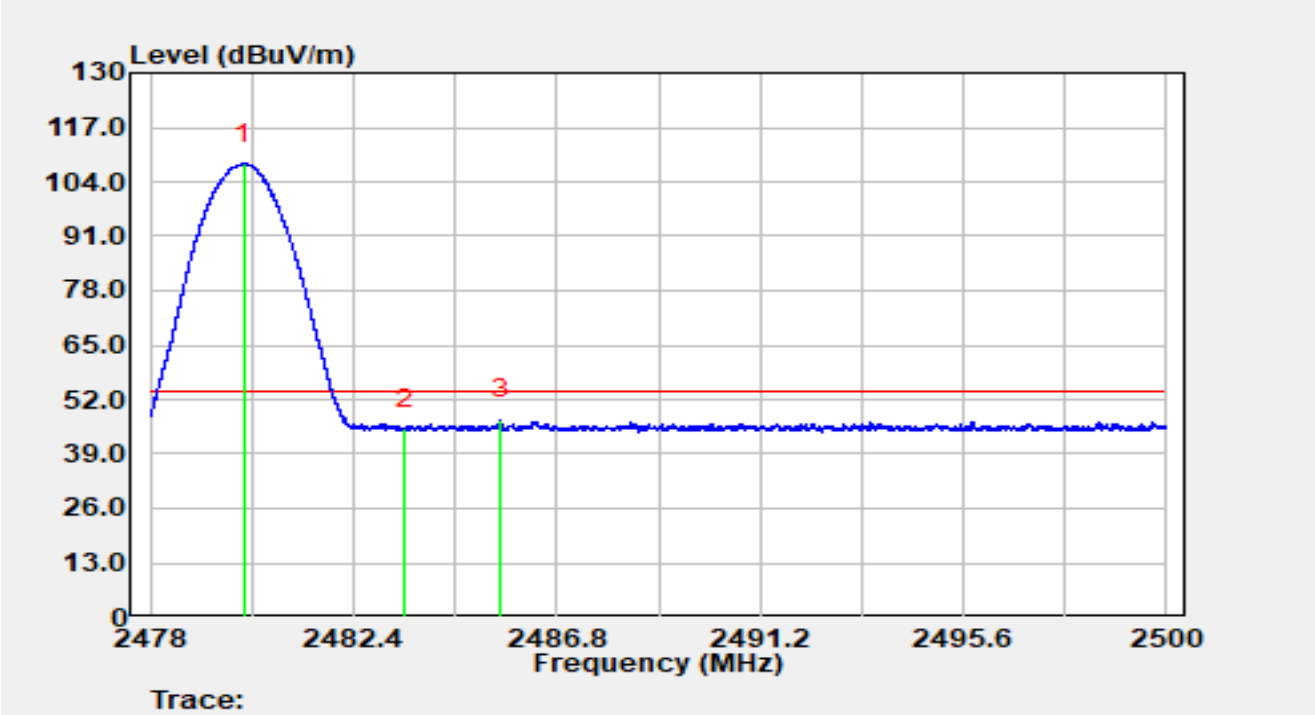

No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		2480.011	73.84	34.48	108.32	N/A	N/A	Average
2		2483.500	10.50	34.49	45.00	-9.00	54.00	Average
3	*	2485.579	12.63	34.50	47.13	-6.87	54.00	Average

Notes:

1. " * " indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-06-08
Temperature	24.3°C	Humidity	65.2%
Limit	FCC_Part 15_Band Edge(3m)	Test Engineer	Justin Guo
Factor	HF907_102861	Polarity	Vertical
EUT	HPE Aruba User Experience Sensor	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by BLE_1M at 2480MHz		

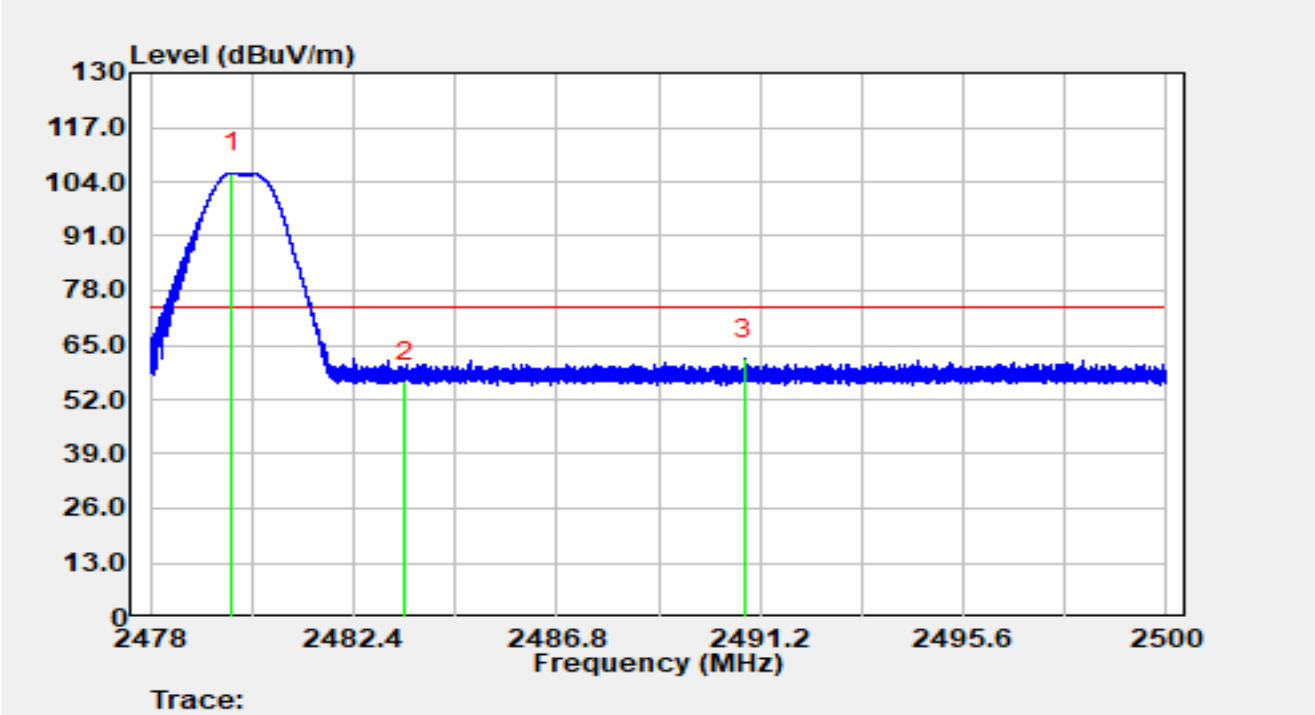

No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		2479.756	71.55	34.47	106.03	N/A	N/A	Peak
2		2483.500	21.85	34.49	56.35	-17.65	74.00	Peak
3	*	2490.852	27.09	34.53	61.62	-12.38	74.00	Peak

Notes:

1. " * " indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-06-08
Temperature	24.3°C	Humidity	65.2%
Limit	FCC_Part 15_Band Edge(3m)	Test Engineer	Justin Guo
Factor	HF907_102861	Polarity	Vertical
EUT	HPE Aruba User Experience Sensor	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by BLE_1M at 2480MHz		

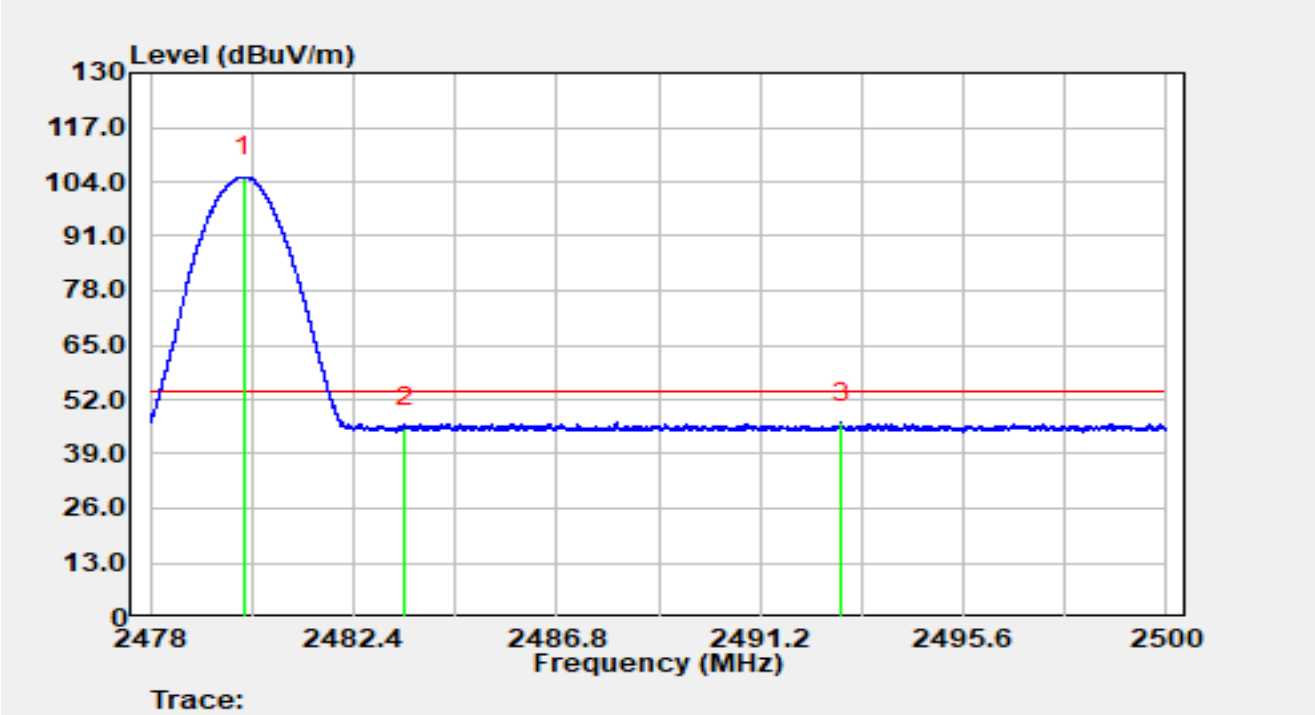

No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		2480.031	70.65	34.48	105.12	N/A	N/A	Average
2		2483.500	10.84	34.49	45.33	-8.67	54.00	Average
3	*	2492.956	12.06	34.54	46.60	-7.40	54.00	Average

Notes:

1. " * " indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

A.8 AC Conducted Emissions Test Result

Site	SIP-SR2	Test Date	2025-06-11
Temperature	25.3 °C	Humidity	56.1 %
Limit	FCC Part 15.207_CE_Mains	Test Engineer	Miron Ding
Factor	ENV216_101684_E	Polarity	Line
EUT	HPE Aruba User Experience Sensor	Test Voltage	AC 120V/60Hz
Test Mode	Transmit By BLE_2M at 2480MHz		

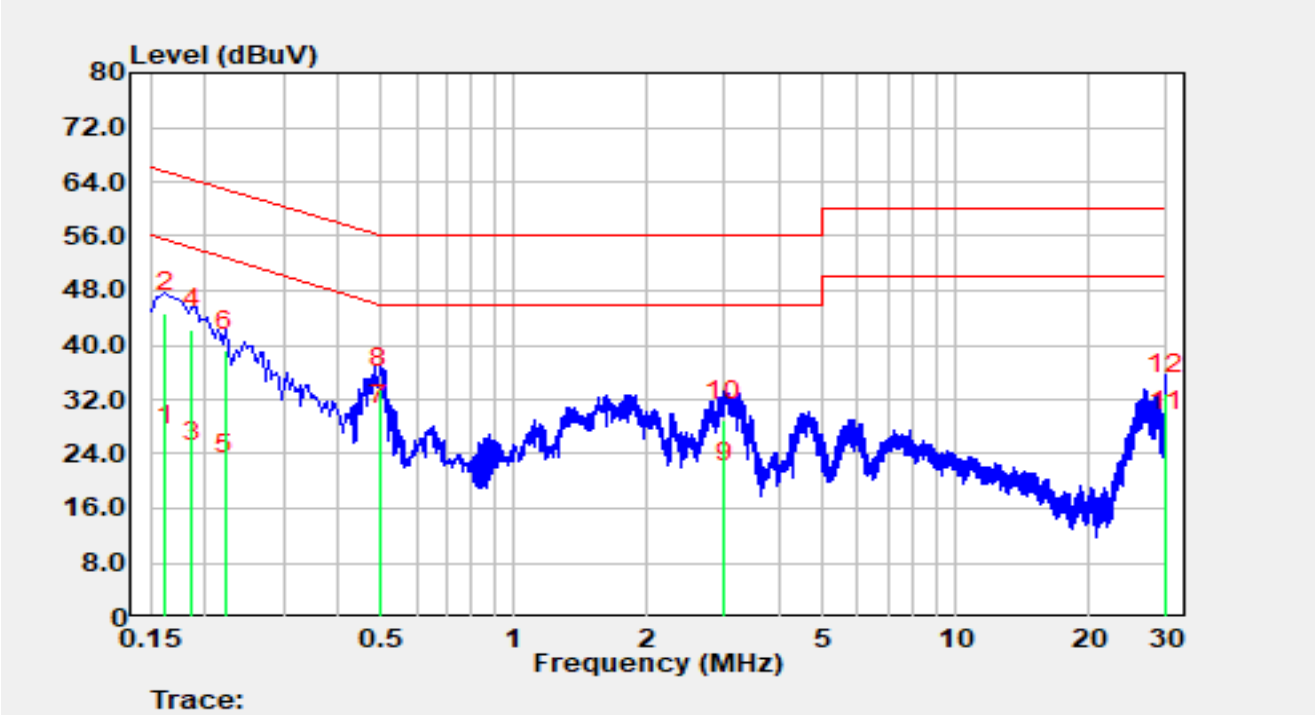

No	Mark	Frequency (MHz)	Reading (dBµV)	C.F (dB)	Measurement (dBµV)	Margin (dB)	Limit (dBµV)	Detector
1		0.162	15.28	9.81	25.09	-30.27	55.36	Average
2		0.162	34.89	9.81	44.70	-20.66	65.36	QP
3		0.186	13.05	9.82	22.87	-31.34	54.21	Average
4		0.186	32.49	9.82	42.32	-21.90	64.21	QP
5		0.222	11.10	9.87	20.97	-31.77	52.74	Average
6		0.222	29.23	9.87	39.10	-23.64	62.74	QP
7	*	0.494	18.28	9.93	28.21	-17.89	46.10	Average
8		0.494	23.67	9.93	33.60	-22.50	56.10	QP
9		2.994	9.58	10.06	19.64	-26.36	46.00	Average
10		2.994	18.85	10.06	28.91	-27.09	56.00	QP
11		30.000	15.93	11.52	27.45	-22.55	50.00	Average
12		30.000	21.25	11.52	32.77	-27.23	60.00	QP

Notes:

1. " * " indicates the worst-case emission level observed during the measurement.
2. C.F (dB) = LISN Factor (dB) + Cable Loss (dB).
3. Measurement (dBμV) = Reading (dBμV) + C.F (dB).

Site	SIP-SR2	Test Date	2025-06-11
Temperature	25.3 °C	Humidity	56.1 %
Limit	FCC Part 15.207_CE_Mains	Test Engineer	Miron Ding
Factor	ENV216_101684_E	Polarity	Neutral
EUT	HPE Aruba User Experience Sensor	Test Voltage	AC 120V/60Hz
Test Mode	Transmit By BLE_2M at 2480MHz		

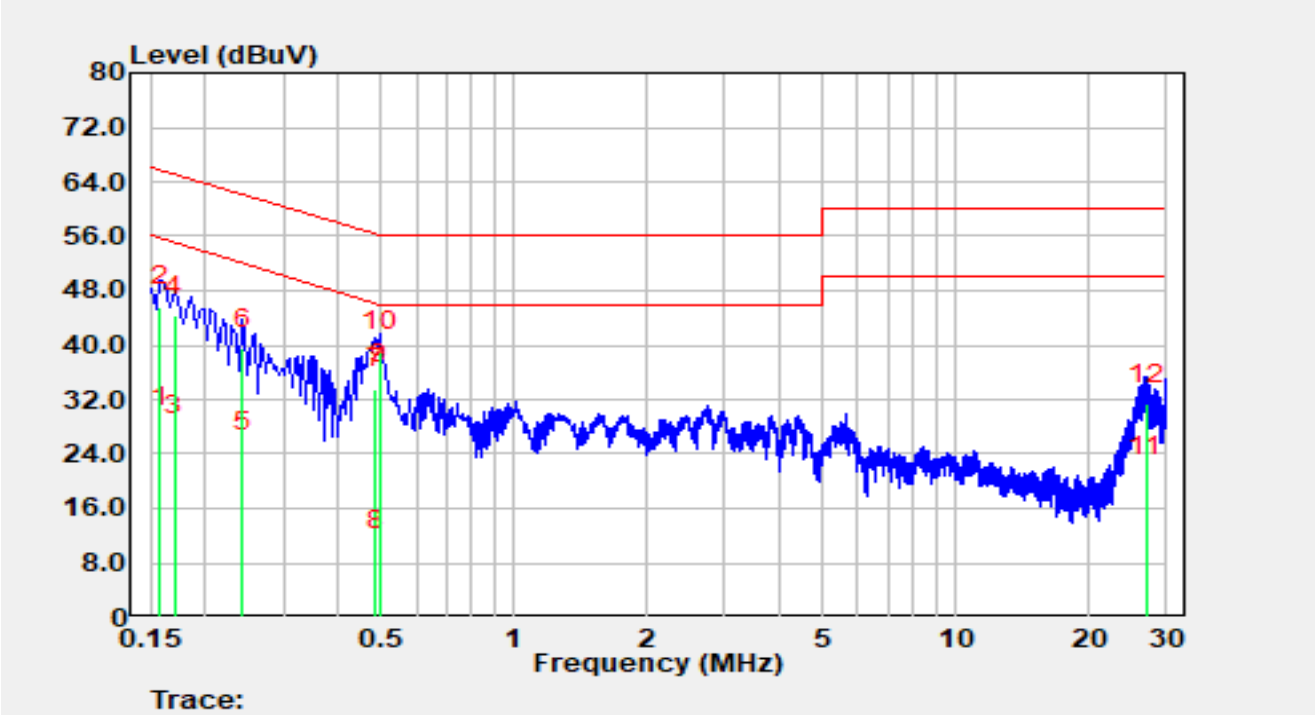

No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB)	Measurement (dBμV)	Margin (dB)	Limit (dBμV)	Detector
1		0.158	18.02	9.81	27.83	-27.73	55.57	Average
2		0.158	35.78	9.81	45.59	-19.98	65.57	QP
3		0.170	16.85	9.81	26.66	-28.30	54.96	Average
4		0.170	34.46	9.81	44.27	-20.70	64.96	QP
5		0.242	14.40	9.86	24.26	-27.77	52.03	Average
6		0.242	29.58	9.86	39.44	-22.58	62.03	QP
7		0.486	23.71	9.90	33.61	-12.63	46.24	Average
8		0.486	0.00	9.90	9.90	-46.34	56.24	QP
9	*	0.494	24.44	9.90	34.34	-11.77	46.10	Average
10		0.494	29.05	9.90	38.95	-17.15	56.10	QP
11		26.936	9.22	11.43	20.65	-29.35	50.00	Average
12		26.936	19.87	11.43	31.31	-28.69	60.00	QP

Notes:

1. " * " indicates the worst-case emission level observed during the measurement.
2. C.F (dB) = LISN Factor (dB) + Cable Loss (dB).
3. Measurement (dBμV) = Reading (dBμV) + C.F (dB).

Appendix B - Test Setup Photograph

Refer to “R25S1034045-UT” file.

Appendix C - EUT Photograph

Refer to “R25S1034045-UE” file.

Appendix D - Original Report

RF MEASUREMENT REPORT

FCC ID:	Q9DASIN0308
Applicant:	Hewlett Packard Enterprise Company
Product:	HPE Aruba User Experience Sensor
Model No.:	ASIN0308
Trademark:	Hewlett Packard Enterprise
FCC Classification:	Digital Transmission System (DTS)
FCC Rule Part(s):	Part 15 Subpart C (Section 15.247)
Result:	Complies
Received Date:	2025-04-08
Test Date:	2025-05-19 ~ 2025-06-11

Reviewed By:

Jame Yuan

Approved By:

Robin Wu

ACCREDITED
TESTING LABORATORY
CERTIFICATE #3628.01

The test results relate only to the samples tested.
This equipment has been shown to be capable of compliance with the applicable technical standards as indicated in the measurement report and was tested in accordance with the measurement procedures specified in ANSI C63.10-2020. Test results reported herein relate only to the item(s) tested.
The test report shall not be reproduced except in full without the written approval of MRT Technology (Suzhou) Co., Ltd.

Revision History

Report No.	Version	Description	Issue Date	Note
R25S1034045-U201	V01	Initial Report	2025-10-14	Valid

CONTENTS

Description Page

1. General Information 5

1.1. Applicant 5
1.2. Manufacturer 5
1.3. Testing Facility 5
1.4. Product Information 6
1.5. Radio Specification under Test 7
1.6. Working Frequencies 7

2. Test Configuration 8

2.1. Test Mode 8
2.2. Test System Connection Diagram 8
2.3. Test Software 8
2.4. Applied Standards 9
2.5. Test Environment Condition 9

3. Antenna Requirements 10

4. Measuring Instrument 11

5. Decision Rules and Measurement Uncertainty 12

5.1. Decision Rules 12
5.2. Measurement Uncertainty 12

6. Test Result 13

6.1. Summary 13
6.2. 6dB Bandwidth Measurement 14
6.2.1. Test Limit 14
6.2.2. Test Procedure 14
6.2.3. Test Setting 14
6.2.4. Test Setup 14
6.2.5. Test Result 14
6.3. Output Power Measurement 15
6.3.1. Test Limit 15
6.3.2. Test Procedure 15
6.3.3. Test Setting 15
6.3.4. Test Setup 15
6.3.5. Test Result 15
6.4. Power Spectral Density Measurement 16
6.4.1. Test Limit 16
6.4.2. Test Procedure 16

6.4.3. Test Setting 16
6.4.4. Test Setup 16
6.4.5. Test Result 16
6.5. Conducted Band Edge and Out-of-Band Emissions Measurement 17
6.5.1. Test Limit 17
6.5.2. Test Procedure 17
6.5.3. Test Settitng 17
6.5.4. Test Setup 18
6.5.5. Test Result 18
6.6. Radiated Spurious Emission Measurement 19
6.6.1. Test Limit 19
6.6.2. Test Procedure 19
6.6.3. Test Setting 19
6.6.4. Test Setup 21
6.6.5. Test Result 22
6.7. Radiated Restricted Band Edge Measurement 23
6.7.1. Test Limit 23
6.7.2. Test Procedure 24
6.7.3. Test Setting 24
6.7.4. Test Setup 25
6.7.5. Test Result 25
6.8. AC Conducted Emissions Measurement 26
6.8.1. Test Limit 26
6.8.2. Test Setup 26
6.8.3. Test Result 26

Appendix A - Test Result 27

A.1 Duty Cycle Test Result 27
A.2 6dB Bandwidth Test Result 29
A.3 Output Power Test Result 33
A.4 Power Spectral Density Test Result 35
A.5 Conducted Band Edge and Out-of-Band Emissions Test Result 39
A.6 Radiated Spurious Emission Test Result 47
A.7 Radiated Restricted Band Edge Test Result 59
A.8 AC Conducted Emissions Test Result 91

Appendix B - Test Setup Photograph 95

Appendix C - EUT Photograph 96

1. General Information

1.1. Applicant

Hewlett Packard Enterprise Company

6280 America Center Drive, San Jose CA 95002, United States

1.2. Manufacturer

Hewlett Packard Enterprise Company

6280 America Center Drive, San Jose CA 95002, United States

1.3. Testing Facility

☒	**Test Site – MRT Suzhou Laboratory**
	Laboratory Location (Suzhou - Wuzhong) D8 Building, No.2 Tian'edang Rd., Wuzhong Economic Development Zone, Suzhou, China **Laboratory Location (Suzhou - SIP)** 4b Building, Liando U Valley, No.200 Xingpu Rd., Shengpu Town, Suzhou Industrial Park, China **Laboratory Location (Suzhou - Wujiang)** Building 1, No.1 Xingdong Road, Wujiang, Suzhou, Jiangsu, People's Republic of China
	Laboratory Accreditations
	A2LA: 3628.01 CNAS: L10551 FCC: CN1166 ISED: CN0001 VCCI: ☐R-20025 ☐G-20034 ☐C-20020 ☐T-20020 ☐R-20141 ☐G-20134 ☐C-20103 ☐T-20104
☐	**Test Site – MRT Shenzhen Laboratory**
	Laboratory Location (Shenzhen) 1G, Building A, Junxiangda Building, Zhongshanyuan Road West, Nanshan District, Shenzhen, China
	Laboratory Accreditations
	A2LA: 3628.02 CNAS: L10551 FCC: CN1284 ISED: CN0105
☐	**Test Site – MRT Taiwan Laboratory**
	Laboratory Location (Taiwan) No. 38, Fuxing 2nd Rd., Guishan Dist., Taoyuan City 333, Taiwan (R.O.C.)
	Laboratory Accreditations
	TAF: 3261 FCC: 291082, TW3261 ISED: TW3261

1.4. Product Information

Product Name	HPE Aruba User Experience Sensor
Model No.	ASIN0308
Serial No.	CNTJMNV02J (Conducted) CNTJMNV004 (Radiated)
Software Version	25.438.42 (r851417 WLTEST)
Wi-Fi Specification	802.11a/b/g/n/ac/ax/be
Bluetooth Specification	BLE only
ZigBee Specification	802.15.4
GNSS Specification	GPS, BDS, GLONASS, Galileo
3GPP Specification	GSM 850/ PCS 1900 WCDMA Band II/ IV/V LTE Band 2/4/5/7/12/13/25/26/38/41
Antenna Specification	Refer to Section 1.5
Power Type	AD/DC adapter input or PoE Injector Input
Integrated Modular Information	
Specification	Modular Name: LTE Module Model Number: EG21-G Manufacturer: Quectel FCC ID: XMR201906EG21G
Accessory	
AC/DC Adapter	Model No.: WB-12G12R Input: 100-240V ~ 50/60Hz, 0.3A Max Output: 12.0V⎓1.0A, 12.0W

Remarks:

1. The information of the EUT (Equipment Under Test) was provided by the manufacturer. The accuracy, completeness, and validity of the information are solely the responsibility of the manufacturer.
2. AC/DC Adapter was selected to perform all RF testing.

1.5. Radio Specification under Test

Bluetooth Frequency	2402 ~ 2480MHz
Channel Number	40
Type of modulation	GFSK
Data Rate	1Mbps & 2Mbps
Antenna Type	Dipole Antenna
Antenna Gain	Radio 0: 4.2dBi Radio 1: 3.1dBi

1.6. Working Frequencies

Channel	Frequency	Channel	Frequency	Channel	Frequency
00	2402 MHz	01	2404 MHz	02	2406 MHz
03	2408 MHz	04	2410 MHz	05	2412 MHz
06	2414 MHz	07	2416 MHz	08	2418 MHz
09	2420 MHz	10	2422 MHz	11	2424 MHz
12	2426 MHz	13	2428 MHz	14	2430 MHz
15	2432 MHz	16	2434 MHz	17	2436 MHz
18	2438 MHz	19	2440 MHz	20	2442 MHz
21	2444 MHz	22	2446 MHz	23	2448 MHz
24	2450 MHz	25	2452 MHz	26	2454 MHz
27	2456 MHz	28	2458 MHz	29	2460 MHz
30	2462 MHz	31	2464 MHz	32	2466 MHz
33	2468 MHz	34	2470 MHz	35	2472 MHz
36	2474 MHz	37	2476 MHz	38	2478 MHz
39	2480 MHz	--	--	--	--

2. Test Configuration

2.1. Test Mode

Mode 1: Transmit by BLE-1Mbps
Mode 2: Transmit by BLE-2Mbps

2.2. Test System Connection Diagram

The device was tested per the guidance ANSI C63.10-2020 was used to reference the appropriate EUT setup for radiated emissions testing and AC line conducted testing.

Connection Diagram

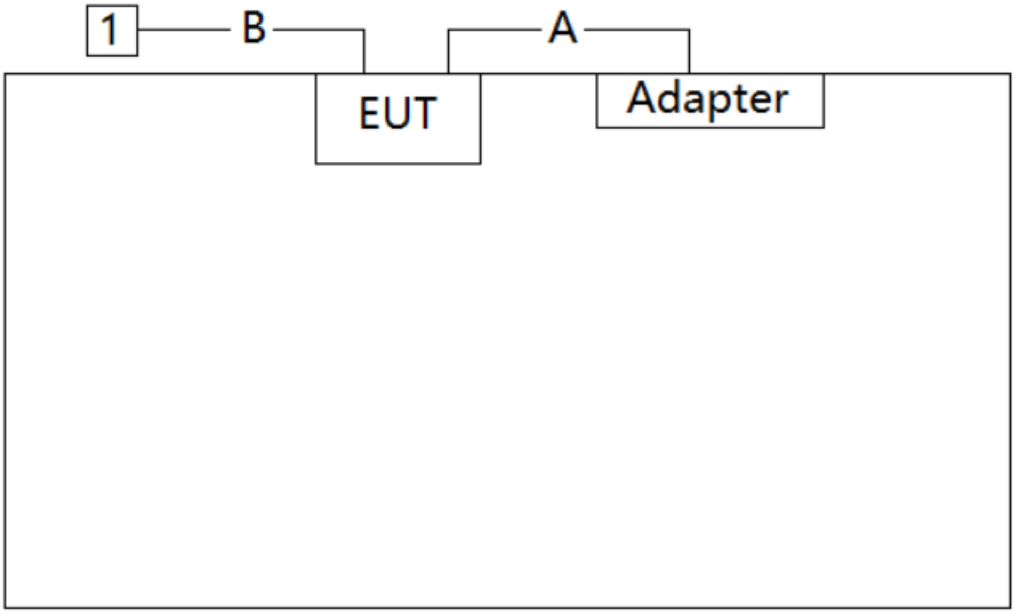

Cable Type		Cable Description	Length
A	Power Cable	Non shielded	2.0m
B	LAN Cable	Non shielded	> 10m
Product		**Manufacturer**	**Model No.**
1	Notebook	ThinkPad	Gen5 E14

2.3. Test Software

The test utility software used during testing was “IPOP”, and commands were provided by manufacturer.

Note: Final power setting please refer to operational description.

2.4. Applied Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- FCC Part 15.247
- KDB 558074 D01v05r02
- ANSI C63.10-2020
- ANSI C63.10-2020/Cor1-2023
- ANSI C63.10a-2024

2.5. Test Environment Condition

Ambient Temperature	15 ~ 35°C
Relative Humidity	20 ~75%RH

3. Antenna Requirements

Excerpt from §15.203 of the FCC Rules/Regulations:

"An intentional radiator antenna shall be designed to ensure that no antenna other than that furnished by the responsible party can be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section."

- The antenna of the device is **permanently attached.**
- There are no provisions for connection to an external antenna.

Conclusion:

The unit complies with the requirement of §15.203.

4. Measuring Instrument

Instrument	Manufacturer	Model No.	Asset No.	Cali. Interval	Cali. Due Date	Test Site
Thermohygrometer	testo	608-H1	MRTSUE06622	1 year	2025-10-29	SIP-AC2
Active Loop Antenna	Schwarzbeck	FMZB 1519-60 D	MRTSUE07075	1 year	2025-11-19	SIP-AC2
Anechoic Chamber	RIKEN	SIP-AC2	MRTSUE06781	1 year	2025-12-19	SIP-AC2
Cable	HUBER+SUHNER	SF106	MRTSUE06522	1 year	2026-05-06	SIP-AC2
EMI Test Receiver	R&S	ESR3	MRTSUE06185	1 year	2025-12-05	SIP-AC2/SIP-AC3
Thermohygrometer	testo	608-H1	MRTSUE06619	1 year	2025-10-16	SIP-AC3
TRILOG Antenna	Schwarzbeck	VULB 9168	MRTSUE06646	1 year	2025-07-29	SIP-AC3
Preamplifier	EMCI	EMC012645SE	MRTSUE06642	1 year	2026-01-05	SIP-AC3
Signal Analyzer	Keysight	N9010B	MRTSUE06559	1 year	2026-04-26	SIP-AC3
Horn Antenna	R&S	HF907	MRTSUE06611	1 year	2025-07-07	SIP-AC3
Anechoic Chamber	RIKEN	SIP-AC3	MRTSUE06782	1 year	2025-12-19	SIP-AC3
Preamplifier	EMCI	EMC184045SE	MRTSUE06602	1 year	2025-10-08	SIP-AC3
Horn Antenna	Schwarzbeck	BBHA 9170	MRTSUE06599	1 year	2025-09-08	SIP-AC3
Cable	HUBER+SUHNER	SF106	MRTSUE06873	1 year	2025-12-19	SIP-AC3
Two-Line V-Network	R&S	ENV216	MRTSUE06003	1 year	2026-04-29	SIP-SR2
EMI Test Receiver	R&S	ESR3	MRTSUE06612	1 year	2026-04-29	SIP-SR2
Thermohygrometer	testo	608-H1	MRTSUE06621	1 year	2025-10-29	SIP-SR2
Shielding Room	MIX-BEP	SIP-SR2	MRTSUE06949	5 years	2029-10-13	SIP-SR2
USB Power Sensor	Keysight	U2021XA	MRTSUE06596	1 year	2025-07-23	SIP-TR1
Signal Analyzer	Keysight	N9010B	MRTSUE07036	1 year	2026-01-21	SIP-TR1
Thermohygrometer	testo	608-H1	MRTSUE11022	1 year	2025-10-16	SIP-TR1
Attenuator	MVE	MVE2213	MRTSUE11111	1 year	2025-08-01	SIP-TR1

Software	Version	Function
e3	230711	EMI Test Software
Agilent Power Analyzer/Agilent Power Panel	V R03.09.00	Power
Controller_MF 7802BS	1.02	RE Antenna & Turntable

5. Decision Rules and Measurement Uncertainty

5.1. Decision Rules

The Decision Rule is based on Simple Acceptance in accordance with ISO Guide 98-4: 2012 Clause 8.2.

(Measurement uncertainty is not taken into account when stating conformity with a specified requirement.)

5.2. Measurement Uncertainty

Where relevant, the following test uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2. This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k = 2.

AC Conducted Emission Measurement
The maximum measurement uncertainty is evaluated as: 9kHz~150kHz: 3.58dB 150kHz~30MHz: 3.20dB
Radiated Emission Measurement
The maximum measurement uncertainty is evaluated as: Coaxial: 9kHz~30MHz: 2.35dB Coplanar: 9kHz~30MHz: 2.37dB Horizontal: 30MHz~200MHz: 3.47dB 200MHz~1GHz: 4.17dB 1GHz~40GHz: 4.97dB Vertical: 30MHz~200MHz: 4.07dB 200MHz~1GHz: 5.28dB 1GHz~40GHz: 4.84dB
Spurious Emissions, Conducted
Measuring Uncertainty for a Level of Confidence of 95% (U=2Uc(y)): 2.5dB
Output Power
Measuring Uncertainty for a Level of Confidence of 95% (U=2Uc(y)): 1.5dB
Power Spectrum Density
Measuring Uncertainty for a Level of Confidence of 95% (U=2Uc(y)): 2.5dB
Occupied Bandwidth
Measuring Uncertainty for a Level of Confidence of 95% (U=2Uc(y)): 3.2%

6. Test Result

6.1. Summary

FCC Section(s)	Test Description	Test Condition	Verdict
15.247(a)(2)	6dB Bandwidth	Conducted	Pass
15.247(b)(3)	Output Power		Pass
15.247(e)	Power Spectral Density		Pass
15.247(d)	Band Edge / Out-of-Band Emissions		Pass
15.205 15.209	General Field Strength (Restricted Bands and Radiated Emission)	Radiated	Pass
15.207	AC Conducted Emissions 150kHz - 30MHz	Line Conducted	Pass

Notes:

1. The analyzer plots shown in this section were captured using a correction table to account for cable and attenuator losses in the system connecting the EUT to the analyzer across relevant frequencies.
2. For radiated emission test, every axis (X, Y, Z) was also verified. The test results shown in the following sections represent the worst-case emissions.

6.2. 6dB Bandwidth Measurement

6.2.1. Test Limit

The minimum 6dB bandwidth shall be at least 500 kHz.

6.2.2. Test Procedure

ANSI C63.10-2020 - Section 11.8

6.2.3. Test Setting

1. The Spectrum's automatic bandwidth measurement capability was used to perform the 6dB bandwidth measurement. The "X" dB bandwidth parameter was set to X = 6. The bandwidth measurement was not influenced by any intermediate power nulls in the fundamental emission.
2. Set RBW = 100 kHz
3. VBW ≥ 3 × RBW
4. Detector = Peak
5. Trace mode = Max hold
6. Sweep = Auto couple
7. Allow the trace to stabilize

6.2.4. Test Setup

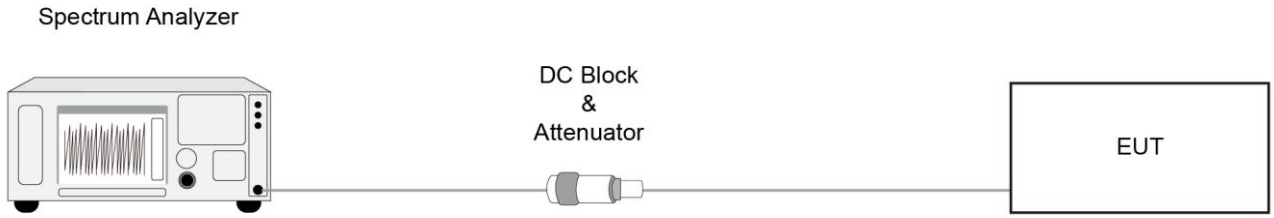

6.2.5. Test Result

Refer to Appendix A.2.

6.3. Output Power Measurement

6.3.1. Test Limit

The maximum output power shall be less 1 Watt (30dBm).

The conducted output power limit specified in paragraph FCC Part 15.247(b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. If transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs FCC Part 15.247(b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

6.3.2. Test Procedure

ANSI C63.10-2020 - Section 11.9.1.2

ANSI C63.10-2020 - Section 11.9.2.3.2

6.3.3. Test Setting

Method PKPM1 (Peak Power Measurement of Signals with DTS BW ≤ 50MHz)

Peak power measurements were performed only when the EUT was transmitting at its maximum power control level using a broadband power meter with a pulse sensor. The pulse sensor employs a VBW = 50MHz so this method was only used for signals whose DTS bandwidth was less than or equal to 50MHz.

Average Power Measurement

Average power measurements were performed only when the EUT was transmitting at its maximum power control level using a broadband power meter with a pulse sensor. The power meter implemented triggering and gating capabilities which were set up such that power measurements were recorded only during the ON time of the transmitter.

6.3.4. Test Setup

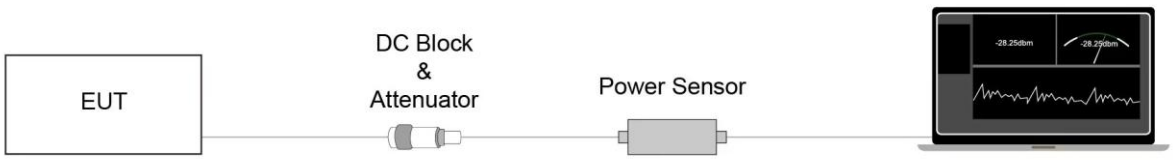

6.3.5. Test Result

Refer to Appendix A.3.

6.4. Power Spectral Density Measurement

6.4.1. Test Limit

The maximum permissible power spectral density is 8dBm in any 3 kHz band.

The same method of determining the conducted output power shall be used to determine the power spectral density.

6.4.2. Test Procedure

ANSI C63.10-2020 Section 11.10.2

6.4.3. Test Setting

1. Analyzer was set to the center frequency of the DTS channel under investigation
2. Span = 1.5 times the DTS channel bandwidth
3. RBW = 3kHz
4. VBW = 10kHz
5. Detector = peak
6. Sweep time = auto couple
7. Trace mode = max hold
8. Trace was allowed to stabilize

6.4.4. Test Setup

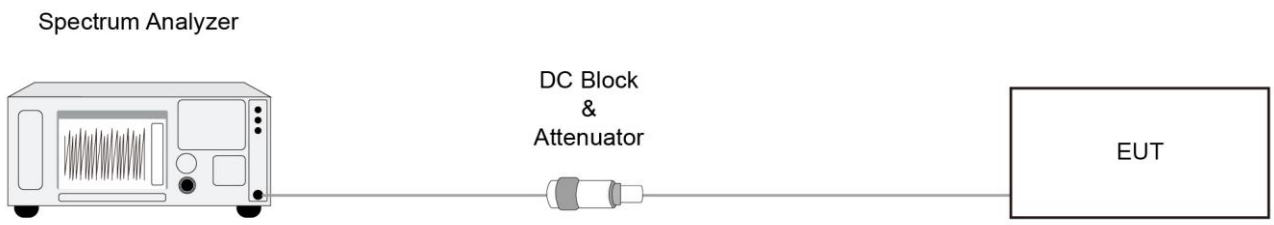

6.4.5. Test Result

Refer to Appendix A.4.

6.5. Conducted Band Edge and Out-of-Band Emissions Measurement

6.5.1. Test Limit

The limit for out-of-band spurious emissions at the band edge is 20dB below the fundamental emission level, as determined from the in-band power measurement of the DTS channel performed in a 100 kHz bandwidth per the PSD procedure.

6.5.2. Test Procedure

ANSI C63.10-2020 - Section 11.11

6.5.3. Test Settitng

Reference level measurement

1. Set instrument center frequency to DTS channel center frequency
2. Set the span to ≥ 1.5 times the DTS bandwidth
3. Set the RBW = 100 kHz
4. Set the VBW ≥ 3 x RBW
5. Detector = peak
6. Sweep time = auto couple
7. Trace mode = max hold
8. Allow trace to fully stabilize

Emission level measurement

1. Set the center frequency and span to encompass frequency range to be measured
2. RBW = 100kHz
3. VBW = 300kHz
4. Detector = Peak
5. Trace mode = max hold
6. Sweep time = auto couple
7. The trace was allowed to stabilize

6.5.4. Test Setup

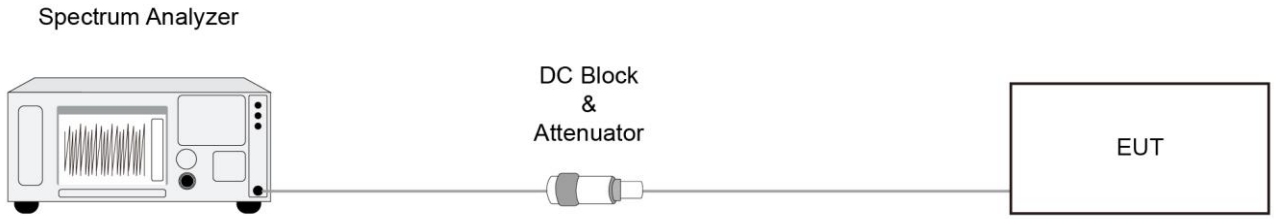

6.5.5. Test Result

Refer to Appendix A.5.

6.6. Radiated Spurious Emission Measurement

6.6.1. Test Limit

All out of band emissions appearing in a restricted band as specified in Section 15.205 of the Title 47 CFR must not exceed the limits shown in Table per Section 15.209.

FCC Part 15 Subpart C Paragraph 15.209		
Frequency [MHz]	Field Strength [μV/m]	Measured Distance [Meters]
0.009 - 0.490	2400/F (kHz)	300
0.490 - 1.705	24000/F (kHz)	30
1.705 - 30	30	30
30 - 88	100	3
88 - 216	150	3
216 - 960	200	3
Above 960	500	3

6.6.2. Test Procedure

ANSI C63.10-2020 - Section 11.11 & 11.12

ANSI C63.10-2020 - Section 6.3 (General Requirements)

ANSI C63.10-2020 - Section 6.4 (Standard test method below 30MHz)

ANSI C63.10-2020 - Section 6.5 (Standard test method above 30MHz to 1GHz)

ANSI C63.10-2020 - Section 6.6 (Standard test method above 1GHz)

6.6.3. Test Setting

Table 1 - RBW as a function of frequency

Frequency	RBW
9 ~ 150 kHz	200 ~ 300 Hz
0.15 ~ 30 MHz	9 ~ 10 kHz
30 ~ 1000 MHz	100 ~ 120 kHz
> 1000MHz	1MHz

Quasi-Peak Measurements below 1GHz

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. Span was set greater than 1MHz
3. RBW = as specified in Table 1
4. Detector = CISPR quasi-peak
5. Sweep time = auto couple
6. Trace was allowed to stabilize

Peak Measurements above 1GHz

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 1MHz
3. VBW = 3MHz
4. Detector = Peak
5. Sweep time = Auto couple
6. Trace mode = Max hold
7. Trace was allowed to stabilize

Average Measurements above 1GHz (Method VB)

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 1MHz
3. VBW; If the EUT is configured to transmit with duty cycle ≥ 98%, set VBW = 10 Hz.

   If the EUT duty cycle is < 98%, set VBW ≥ 1/T. T is the minimum transmission duration.

Radio 0 & Radio 1:

BLE 1Mbps	2.7kHz	BLE 2Mbps	5.1kHz	--	--

4. Detector = Peak
5. Sweep time = auto
6. Trace mode = max hold
7. Trace was allowed to stabilize

6.6.4. Test Setup

Below 30MHz Test Setup:

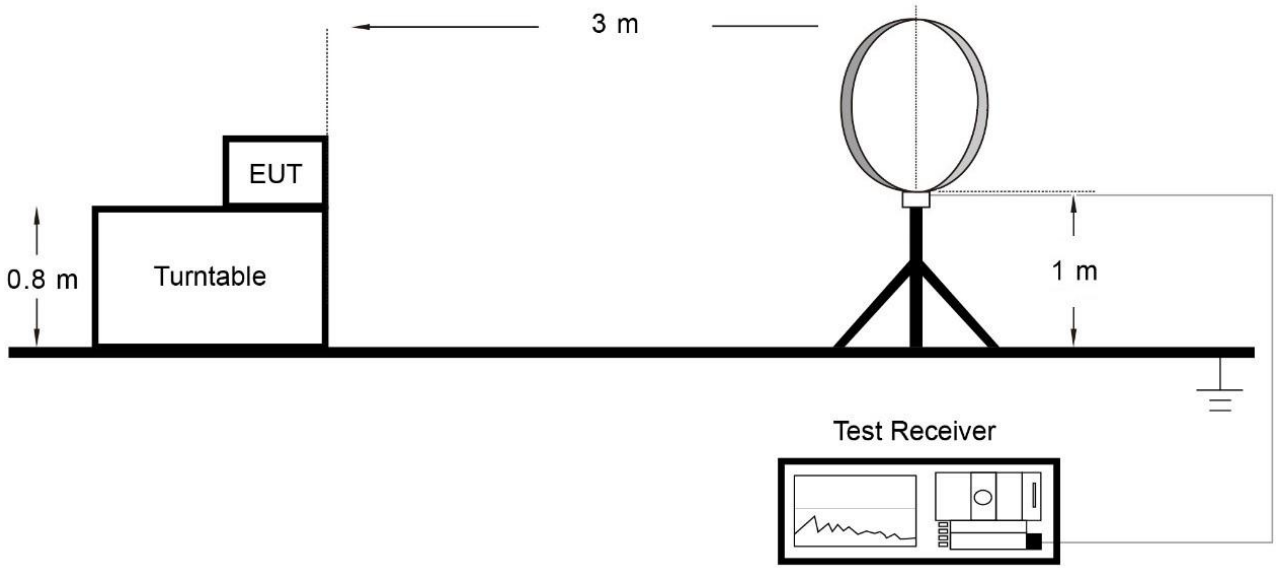

Below 1GHz Test Setup:

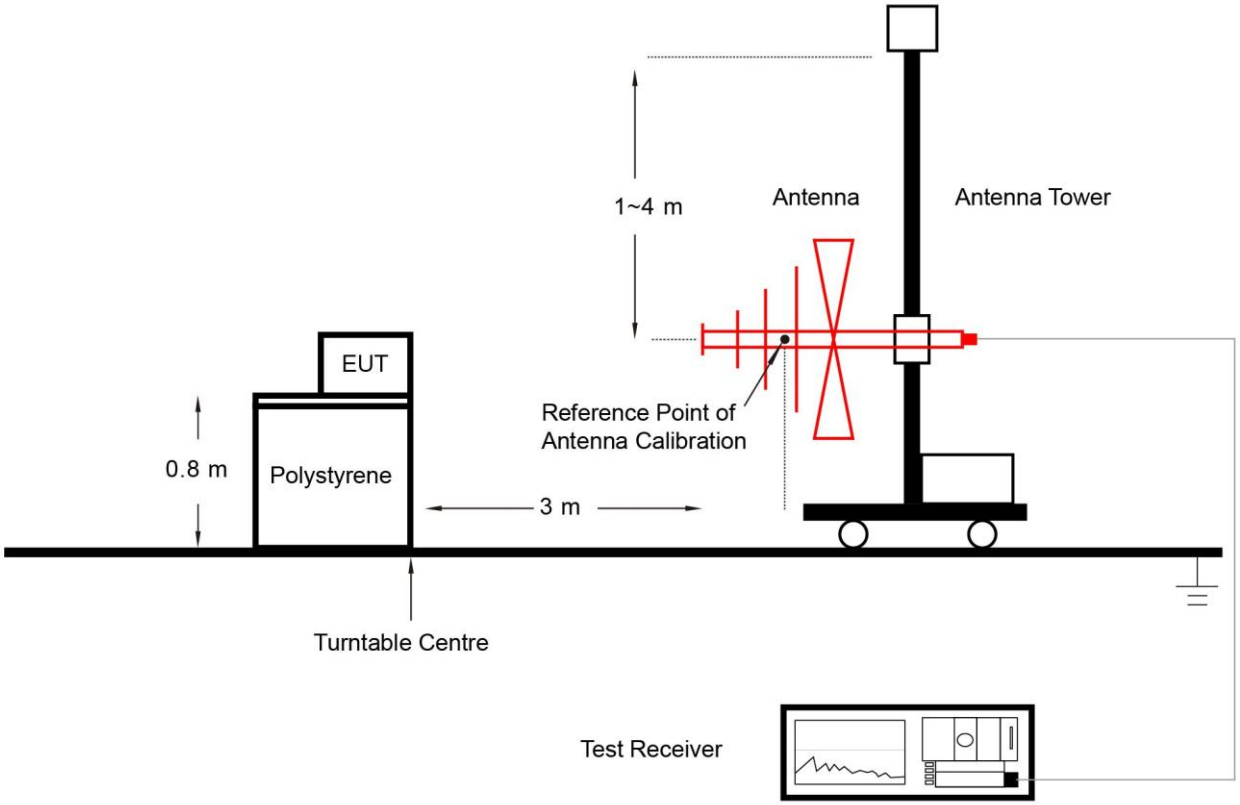

Above 1GHz Test Setup:

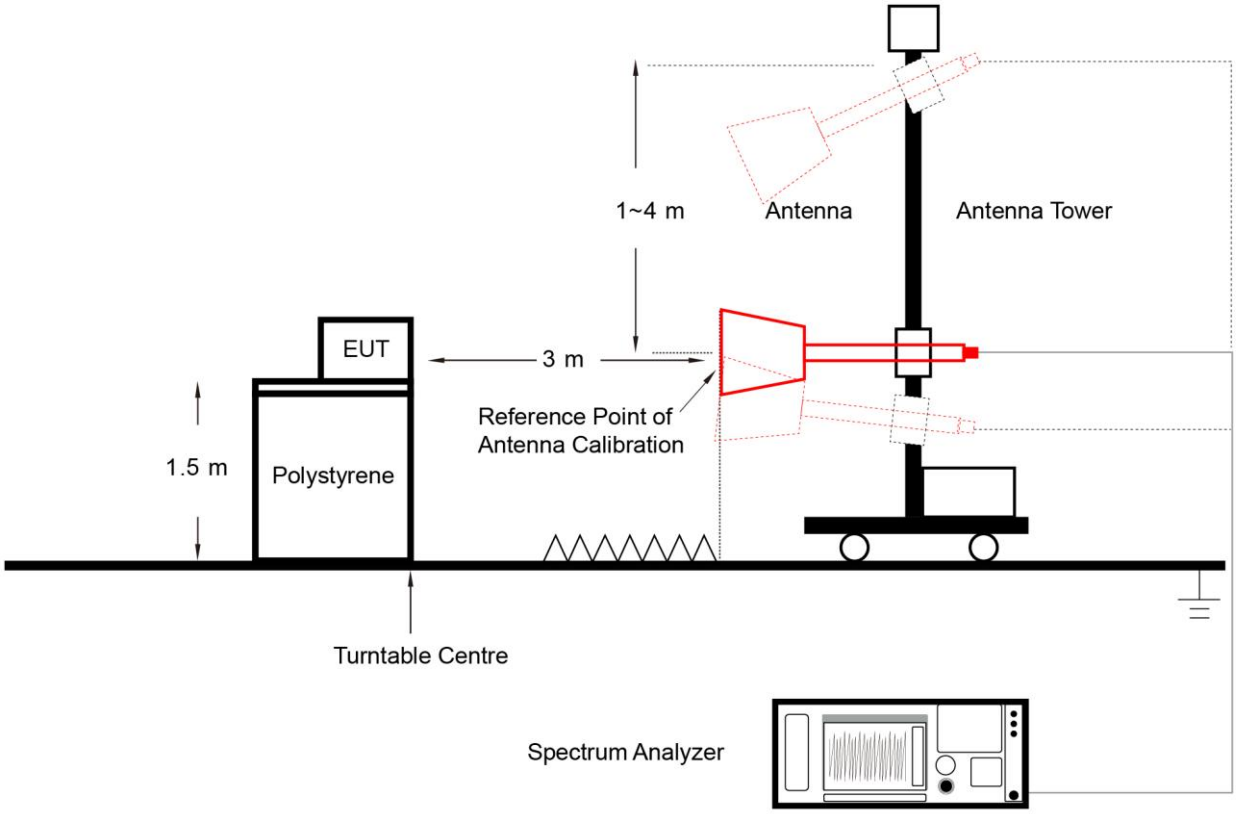

6.6.5. Test Result

Refer to Appendix A.6.

6.7. Radiated Restricted Band Edge Measurement

6.7.1. Test Limit

For 15.205 requirement:

Radiated emissions which fall in the restricted bands, as defined in Section 15.205(a) of FCC part 15, must also comply with the radiated emission limits specified in Section 15.209(a).

Frequency (MHz)	Frequency (MHz)	Frequency (MHz)	Frequency (GHz)
0.090 - 0.110	16.42 - 16.423	399.9 - 410	4.5 - 5.15
[1] 0.495 - 0.505	16.69475 - 16.69525	608 - 614	5.35 - 5.46
2.1735 - 2.1905	16.80425 - 16.80475	960 - 1240	7.25 - 7.75
4.125 - 4.128	25.5 - 25.67	1300 - 1427	8.025 - 8.5
4.17725 - 4.17775	37.5 - 38.25	1435 - 1626.5	9.0 - 9.2
4.20725 - 4.20775	73 - 74.6	1645.5 - 1646.5	9.3 - 9.5
6.215 - 6.218	74.8 - 75.2	1660 - 1710	10.6 - 12.7
6.26775 - 6.26825	108 - 121.94	1718.8 - 1722.2	13.25 - 13.4
6.31175 - 6.31225	123 - 138	2200 - 2300	14.47 - 14.5
8.291 - 8.294	149.9 - 150.05	2310 - 2390	15.35 - 16.2
8.362 - 8.366	156.52475 - 156.52525	2483.5 - 2500	17.7 - 21.4
8.37625 - 8.38675	156.7 - 156.9	2690 - 2900	22.01 - 23.12
8.41425 - 8.41475	162.0125 - 167.17	3260 - 3267	23.6 - 24.0
12.29 - 12.293	167.72 - 173.2	3332 - 3339	31.2 - 31.8
12.51975 - 12.52025	240 - 285	3345.8 - 3358	36.43 - 36.5
12.57675 - 12.57725	322 - 335.4	3600 - 4400	([2])
13.36 - 13.41	--	--	--

All out of band emissions appearing in a restricted band as specified in Section 15.205 of the Title 47CFR must not exceed the limits shown in Table per Section 15.209.

FCC Part 15 Subpart C Paragraph 15.209		
Frequency [MHz]	Field Strength [μV/m]	Measured Distance [Meters]
0.009 - 0.490	2400/F (kHz)	300
0.490 - 1.705	24000/F (kHz)	30
1.705 - 30	30	30
30 - 88	100	3
88 - 216	150	3
216 - 960	200	3
Above 960	500	3

6.7.2. Test Procedure

ANSI C63.10-2020 Section 6.3 & 6.6 & 11.12

6.7.3. Test Setting

Peak Field Strength Measurements

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 1MHz
3. VBW = 3MHz
4. Detector = peak
5. Sweep time = auto couple
6. Trace mode = max hold
7. Trace was allowed to stabilize

Average Field Strength Measurements

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 1MHz
3. VBW; If the EUT is configured to transmit with duty cycle ≥ 98%, set VBW = 10 Hz.

   If the EUT duty cycle is < 98%, set VBW ≥ 1/T. T is the minimum transmission duration.

Radio 0 & Radio 1:

BLE 1Mbps	2.7kHz	BLE 2Mbps	5.1kHz	--	--

4. Detector = Peak
5. Sweep time = auto
6. Trace mode = max hold
7. Allow max hold to run for at least 50 times (1/duty cycle) traces

6.7.4. Test Setup

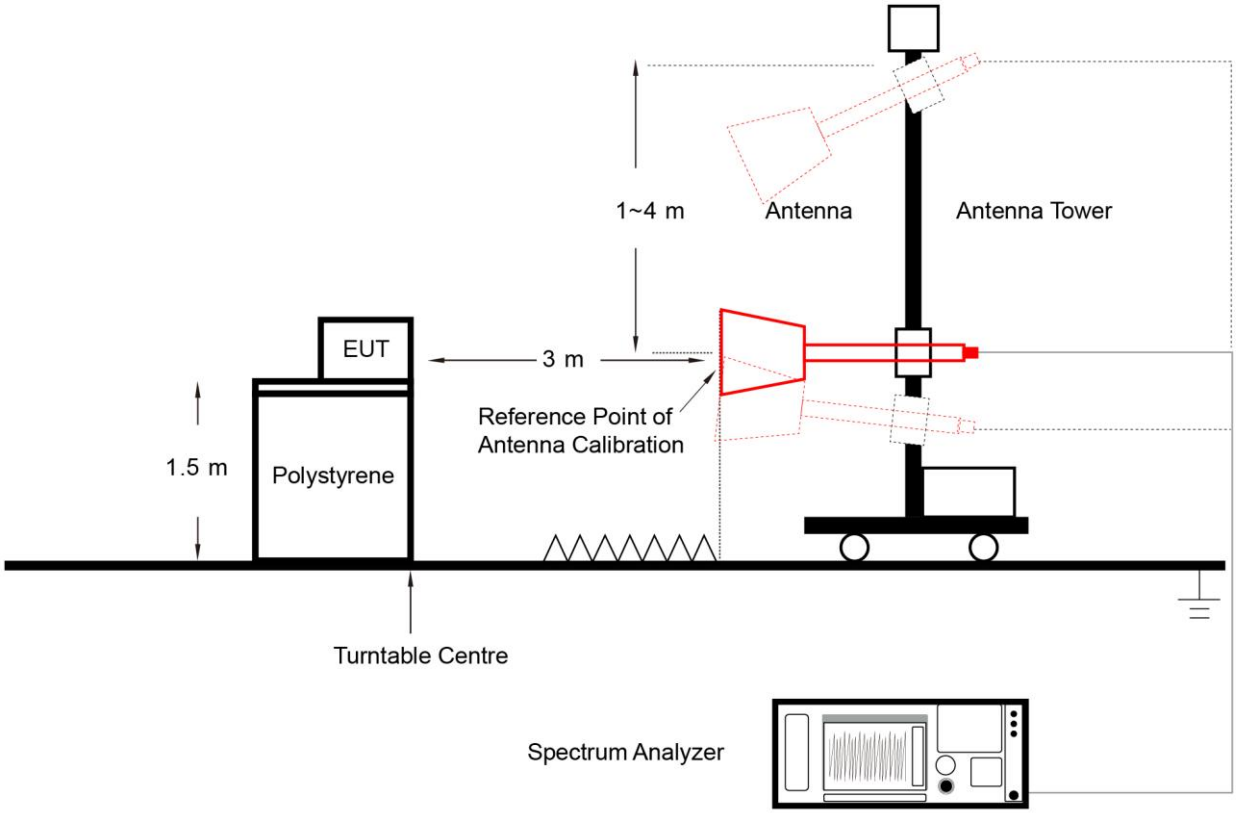

6.7.5. Test Result

Refer to Appendix A.7.

6.8. AC Conducted Emissions Measurement

6.8.1. Test Limit

FCC Part 15 Subpart C Paragraph 15.207 Limits		
Frequency (MHz)	QP (dBμV)	AV (dBμV)
0.15 - 0.50	66 - 56	56 - 46
0.50 - 5.0	56	46
5.0 - 30	60	50
Note 1: The lower limit shall apply at the transition frequencies. Note 2: The limit decreases linearly with the logarithm of the frequency in the range 0.15MHz to 0.5MHz.		

6.8.2. Test Setup

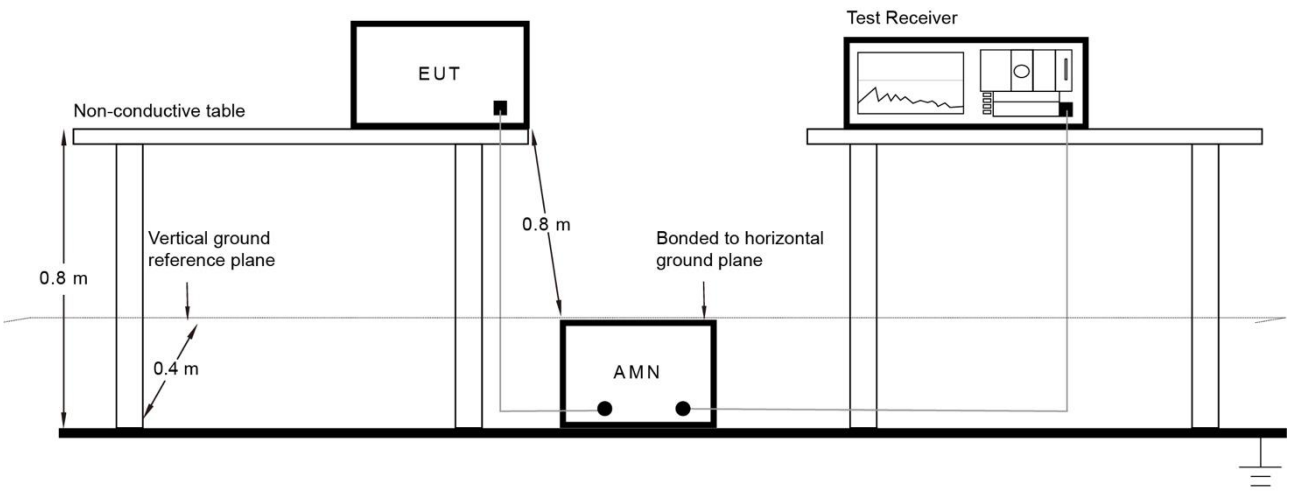

6.8.3. Test Result

Refer to Appendix A.8.

Appendix A - Test Result

A.1 Duty Cycle Test Result

Test Site	SIP-TR1	Test Engineer	Alan Yu
Test Date	2025-05-19	Radio	0

Test Mode	Duty Cycle
BLE-1Mbps	60.20%
BLE-2Mbps	30.72%
Duty Cycle (T = Transmission Duration)	
BLE-1Mbps (T = 375.7μs)	BLE-2Mbps (T = 191.7μs)

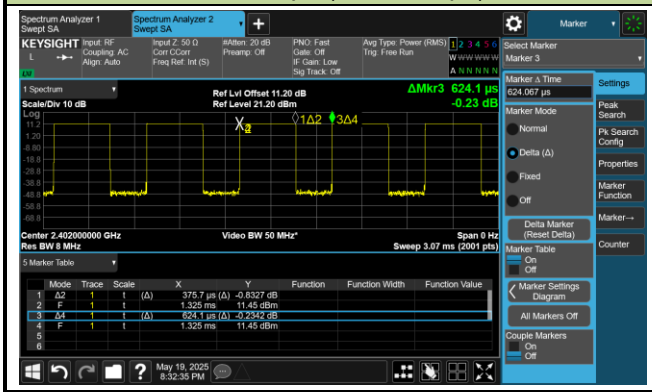

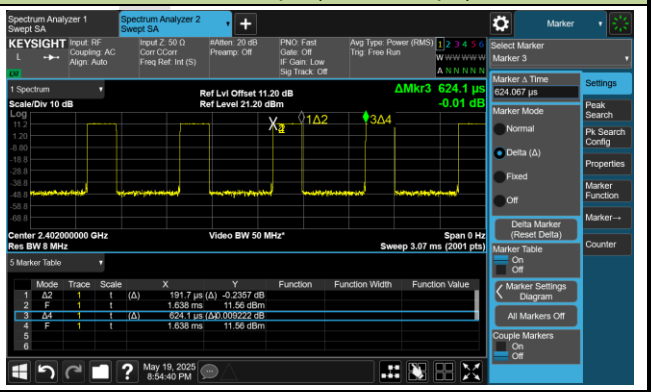

Test Site	SIP-TR1	Test Engineer	Alan Yu
Test Date	2025-05-19	Radio	1

Test Mode	Duty Cycle
BLE-1Mbps	60.05%
BLE-2Mbps	30.96%
Duty Cycle (T = Transmission Duration)	
BLE-1Mbps (T = 375.7μs)	BLE-2Mbps (T = 193.2μs)
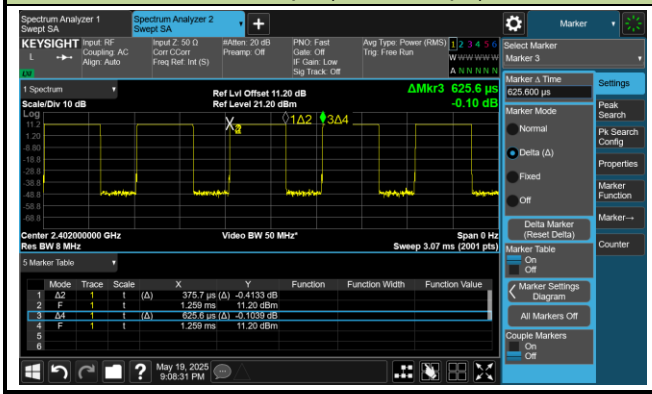	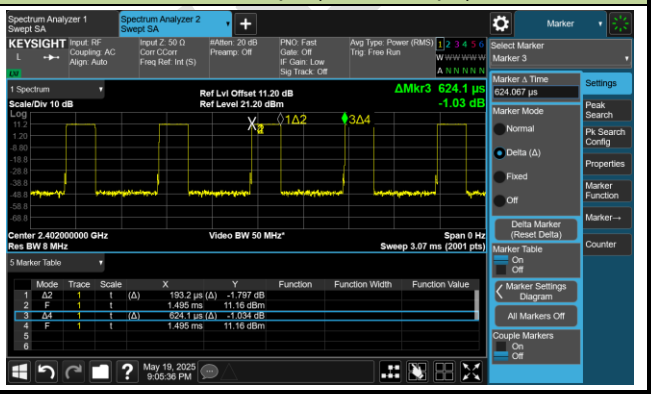

A.2 6dB Bandwidth Test Result

Test Site	SIP-TR1	Test Engineer	Alan Yu
Test Date	2025-05-21	Radio	0

Test Mode	Data Rate	Channel No.	Frequency (MHz)	6dB Bandwidth (MHz)	Limit (MHz)
BLE	1Mbps	00	2402	0.7141	≥ 0.5
BLE	1Mbps	19	2440	0.7117	≥ 0.5
BLE	1Mbps	39	2480	0.7151	≥ 0.5
BLE	2Mbps	00	2402	1.2570	≥ 0.5
BLE	2Mbps	19	2440	1.2570	≥ 0.5
BLE	2Mbps	39	2480	1.2530	≥ 0.5

BLE-1Mbps 6dB Bandwidth

Channel 00 (2402MHz)

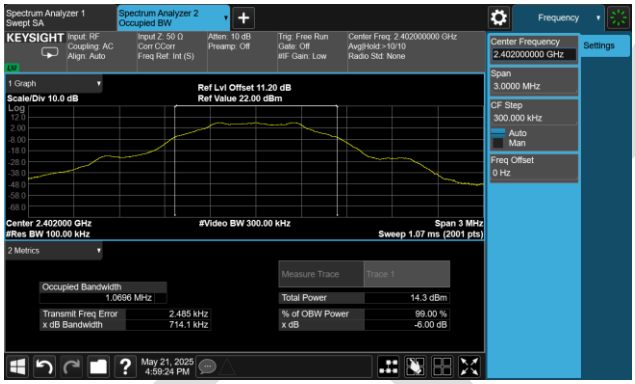

Channel 19 (2440MHz)

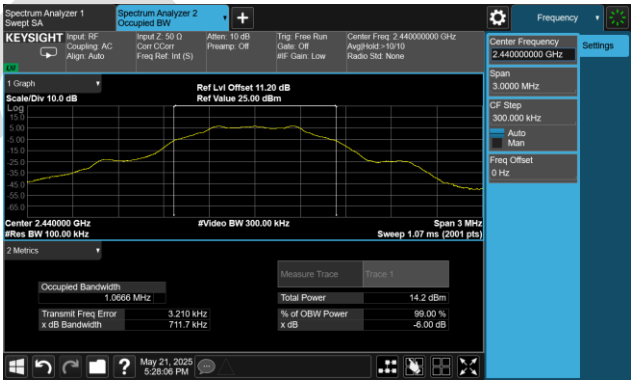

Channel 39 (2480MHz)

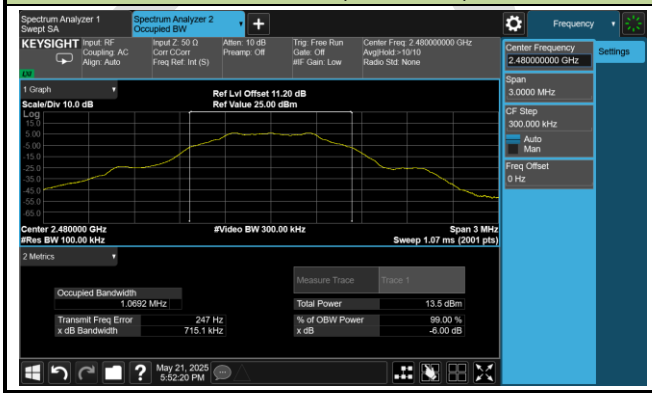

BLE-2Mbps 6dB Bandwidth	
Channel 00 (2402MHz)	Channel 19 (2440MHz)
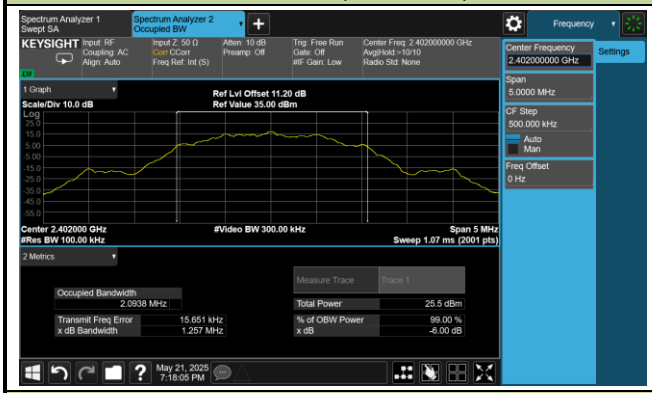	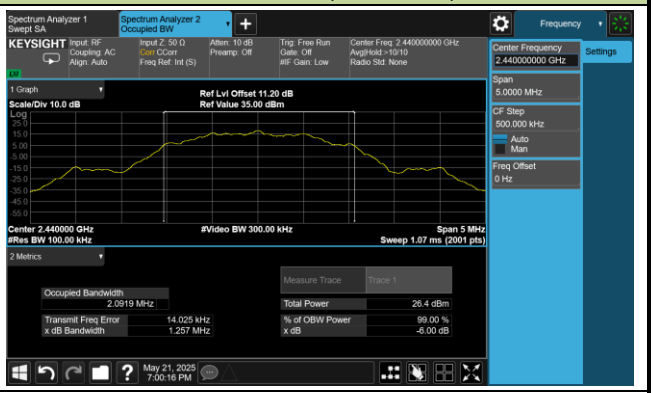
Channel 39 (2480MHz)	
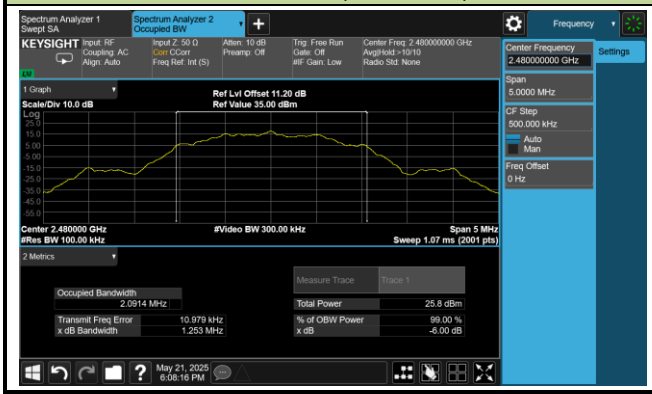	

Test Site	SIP-TR1	Test Engineer	Alan Yu
Test Date	2025-05-21	Radio	1

Test Mode	Data Rate	Channel No.	Frequency (MHz)	6dB Bandwidth (MHz)	Limit (MHz)
BLE	1Mbps	00	2402	0.7137	≥ 0.5
BLE	1Mbps	19	2440	0.7159	≥ 0.5
BLE	1Mbps	39	2480	0.1755	≥ 0.5
BLE	2Mbps	00	2402	1.2470	≥ 0.5
BLE	2Mbps	19	2440	1.2530	≥ 0.5
BLE	2Mbps	39	2480	1.2470	≥ 0.5

BLE-1Mbps 6dB Bandwidth

Channel 00 (2402MHz)

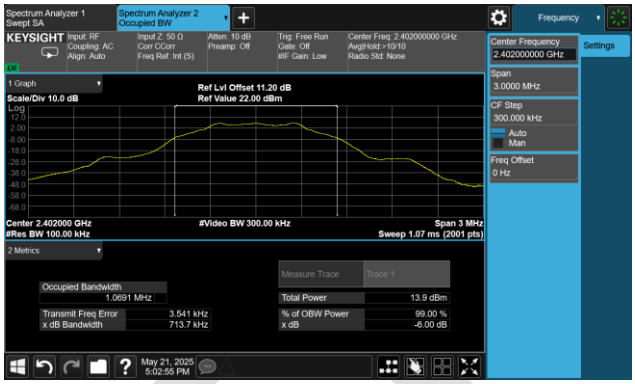

Channel 19 (2440MHz)

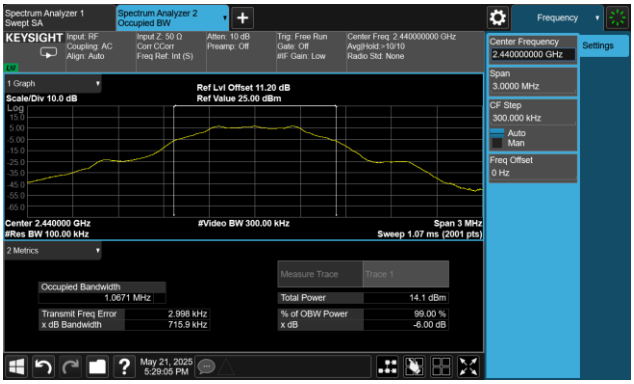

Channel 39 (2480MHz)

BLE-2Mbps 6dB Bandwidth	
Channel 00 (2402MHz)	Channel 19 (2440MHz)
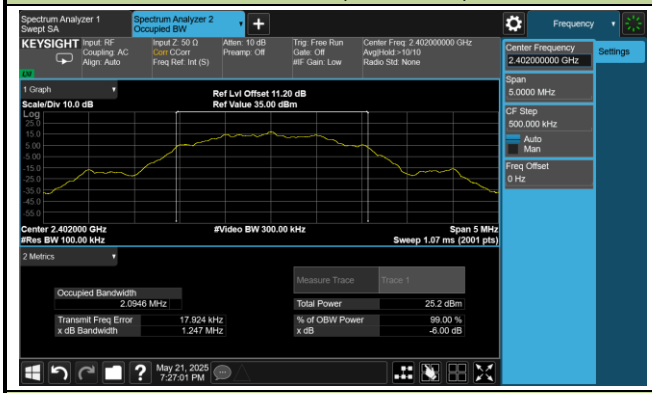	
Channel 39 (2480MHz)	
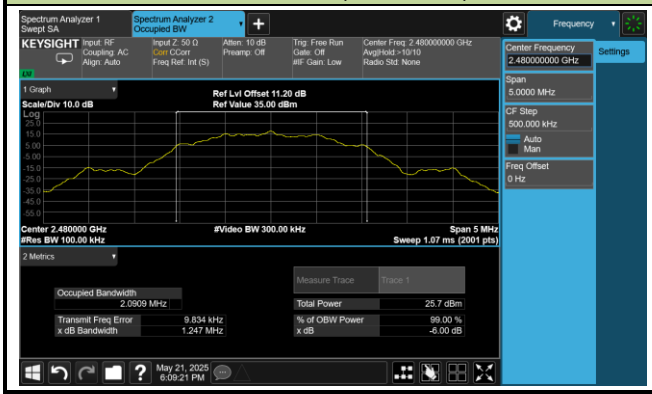	

A.3 Output Power Test Result

Test Site	SIP-TR1	Test Engineer	Alan Yu
Test Date	2025-05-20	Radio	0

Test Result of Peak Output Power

Test Mode	Data Rate	Channel No.	Frequency (MHz)	Peak Power (dBm)	Limit (dBm)	Result
BLE	1Mbps	00	2402	8.31	≤ 30.00	Pass
BLE	1Mbps	19	2440	7.59	≤ 30.00	Pass
BLE	1Mbps	39	2480	8.32	≤ 30.00	Pass
BLE	2Mbps	00	2402	8.20	≤ 30.00	Pass
BLE	2Mbps	19	2440	7.91	≤ 30.00	Pass
BLE	2Mbps	39	2480	7.53	≤ 30.00	Pass

Test Result of Average Output Power (Reporting Only)

Test Mode	Data Rate	Channel No.	Frequency (MHz)	Average Power (dBm)	Limit (dBm)	Result
BLE	1Mbps	00	2402	7.77	≤ 30.00	Pass
BLE	1Mbps	19	2440	7.17	≤ 30.00	Pass
BLE	1Mbps	39	2480	7.78	≤ 30.00	Pass
BLE	2Mbps	00	2402	7.76	≤ 30.00	Pass
BLE	2Mbps	19	2440	7.59	≤ 30.00	Pass
BLE	2Mbps	39	2480	7.13	≤ 30.00	Pass

Test Site	SIP-TR1	Test Engineer	Alan Yu
Test Date	2025-05-20	Radio	1

Test Result of Peak Output Power

Test Mode	Data Rate	Channel No.	Frequency (MHz)	Peak Power (dBm)	Limit (dBm)	Result
BLE	1Mbps	00	2402	8.03	≤ 30.00	Pass
BLE	1Mbps	19	2440	8.20	≤ 30.00	Pass
BLE	1Mbps	39	2480	8.22	≤ 30.00	Pass
BLE	2Mbps	00	2402	8.02	≤ 30.00	Pass
BLE	2Mbps	19	2440	8.31	≤ 30.00	Pass
BLE	2Mbps	39	2480	7.52	≤ 30.00	Pass

Test Result of Average Output Power (Reporting Only)

Test Mode	Data Rate	Channel No.	Frequency (MHz)	Average Power (dBm)	Limit (dBm)	Result
BLE	1Mbps	00	2402	7.32	≤ 30.00	Pass
BLE	1Mbps	19	2440	7.66	≤ 30.00	Pass
BLE	1Mbps	39	2480	7.70	≤ 30.00	Pass
BLE	2Mbps	00	2402	7.48	≤ 30.00	Pass
BLE	2Mbps	19	2440	7.93	≤ 30.00	Pass
BLE	2Mbps	39	2480	7.17	≤ 30.00	Pass

A.4 Power Spectral Density Test Result

Test Site	SIP-TR1	Test Engineer	Alan Yu
Test Date	2025-05-20	Radio	0

Test Mode	Data Rate	Channel No.	Frequency (MHz)	PSD Result (dBm / 3kHz)	Limit (dBm / 3kHz)	Result
BLE	1Mbps	00	2402	-7.52	≤ 8.00	Pass
BLE	1Mbps	19	2440	-8.08	≤ 8.00	Pass
BLE	1Mbps	39	2480	-7.11	≤ 8.00	Pass
BLE	2Mbps	00	2402	-9.64	≤ 8.00	Pass
BLE	2Mbps	19	2440	-9.82	≤ 8.00	Pass
BLE	2Mbps	39	2480	-10.13	≤ 8.00	Pass

BLE-1Mbps PSD

Channel 00 (2402MHz)

Channel 19 (2440MHz)

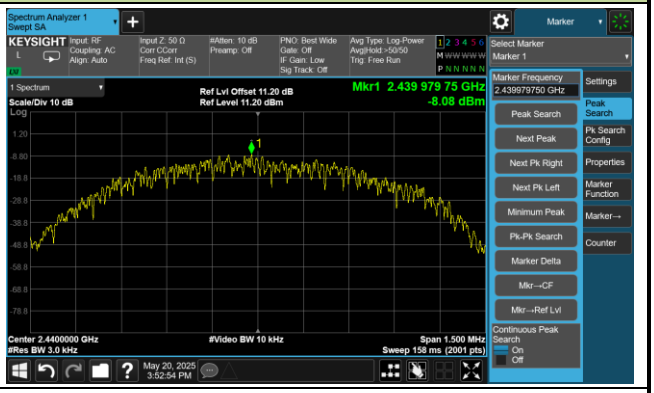

Channel 39 (2480MHz)

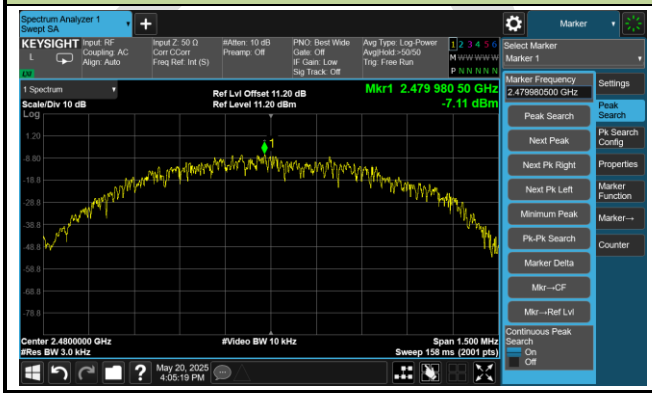

BLE-2Mbps PSD	
Channel 00 (2402MHz)	Channel 19 (2440MHz)
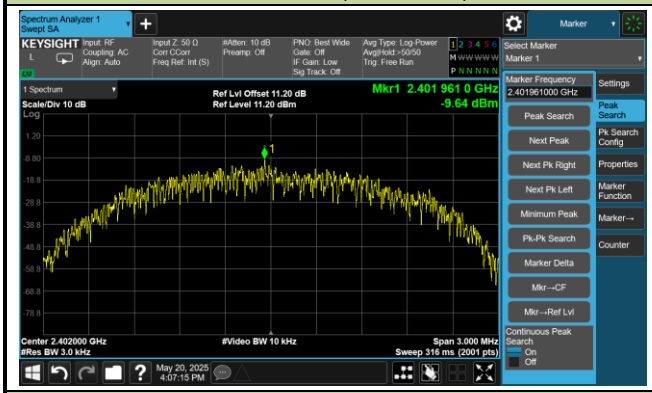	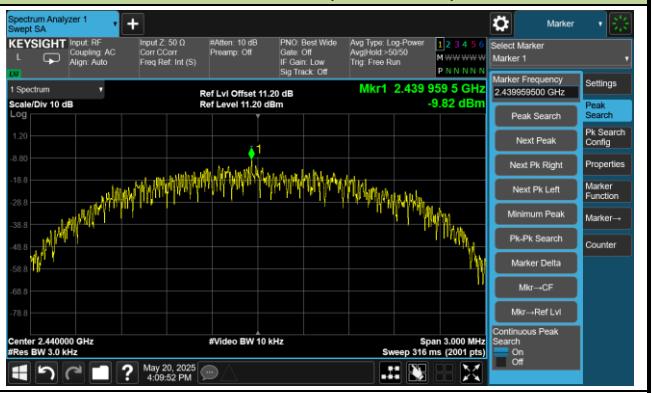
Channel 39 (2480MHz)	
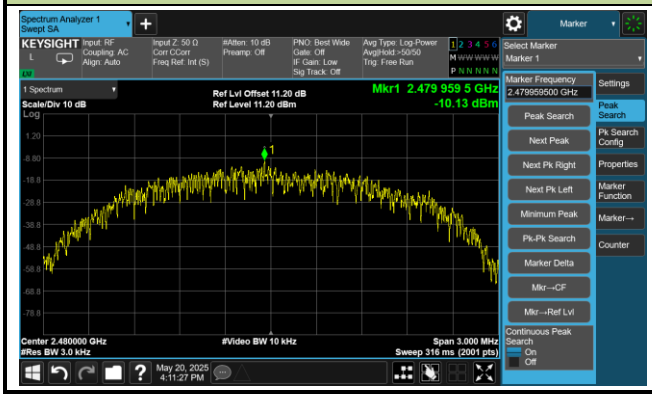	

Test Site	SIP-TR1	Test Engineer	Alan Yu
Test Date	2025-05-20	Radio	1

Test Mode	Data Rate	Channel No.	Frequency (MHz)	PSD Result (dBm / 3kHz)	Limit (dBm / 3kHz)	Result
BLE	1Mbps	00	2402	-8.93	≤ 8.00	Pass
BLE	1Mbps	19	2440	-7.61	≤ 8.00	Pass
BLE	1Mbps	39	2480	-8.20	≤ 8.00	Pass
BLE	2Mbps	00	2402	-10.93	≤ 8.00	Pass
BLE	2Mbps	19	2440	-9.58	≤ 8.00	Pass
BLE	2Mbps	39	2480	-10.20	≤ 8.00	Pass

BLE-1Mbps PSD

Channel 00 (2402MHz)

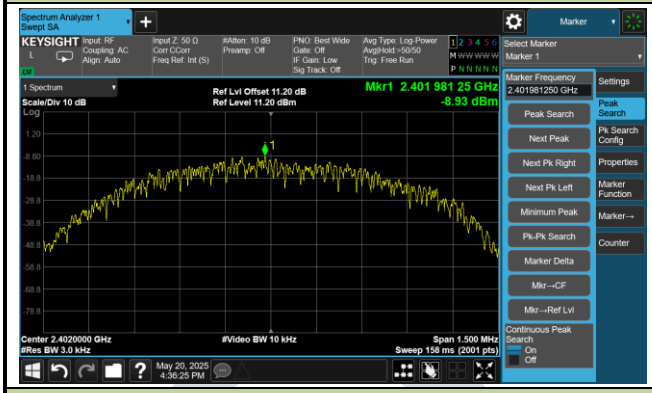

Channel 19 (2440MHz)

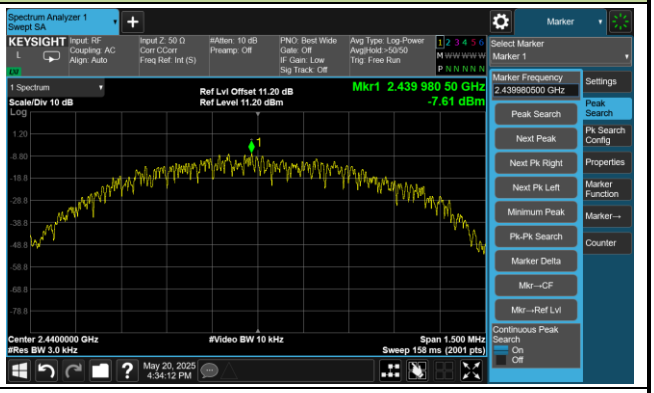

Channel 39 (2480MHz)

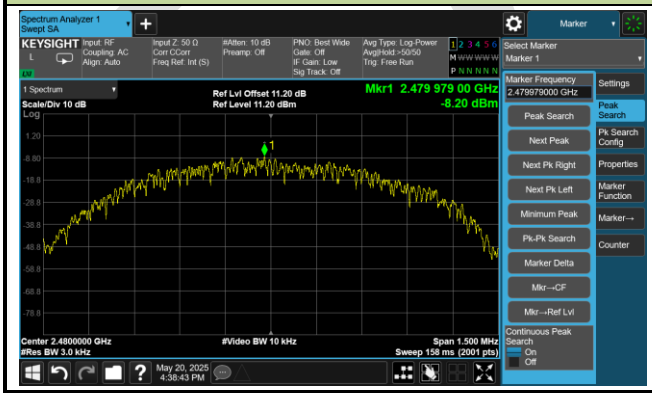

BLE-2Mbps PSD	
Channel 00 (2402MHz)	Channel 19 (2440MHz)
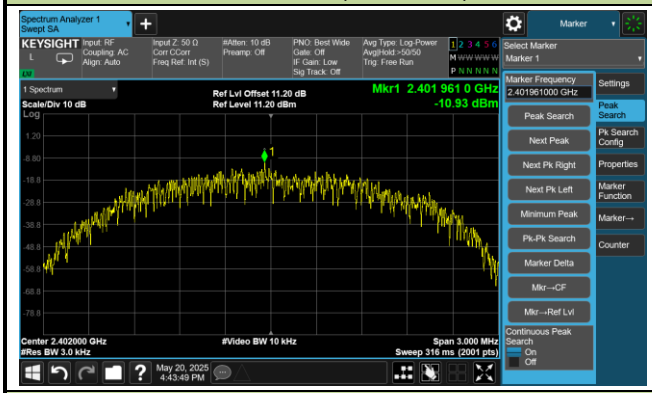	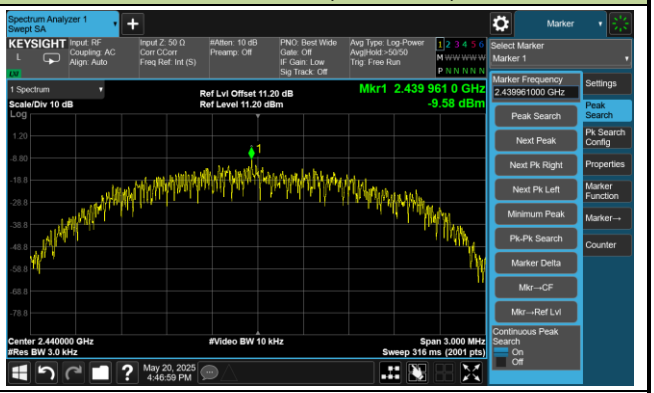
Channel 39 (2480MHz)	
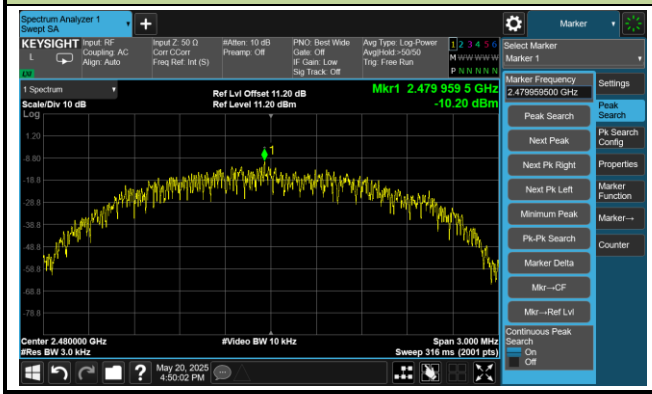	

A.5 Conducted Band Edge and Out-of-Band Emissions Test Result

Test Site	SIP-TR1	Test Engineer	Alan Yu
Test Date	2025-05-21	Radio	0

Test Mode	Data Rate / Mbps	Channel No.	Frequency (MHz)	Limit	Result
BLE	1	00	2402	20	Pass
BLE	1	19	2440	20	Pass
BLE	1	39	2480	20	Pass
BLE	2	00	2402	20	Pass
BLE	2	19	2440	20	Pass
BLE	2	39	2480	20	Pass

BLE-1Mbps Out-of-Band Emissions

Channel 00 (2402MHz)

100kHz PSD Reference Level

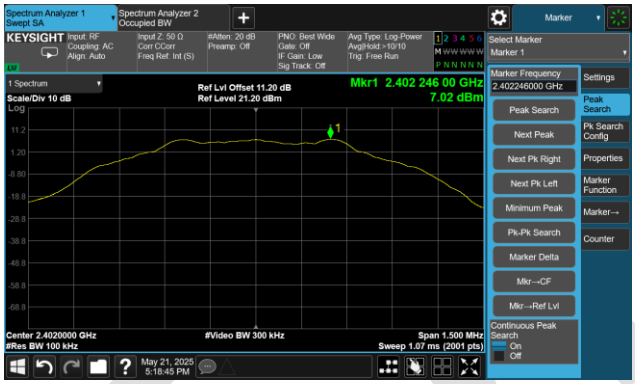

Low Band Edge

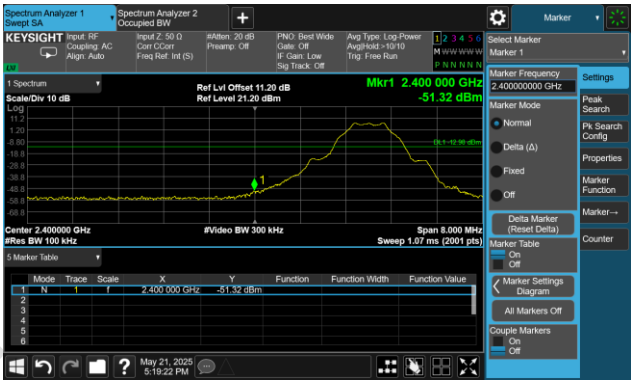

Spurious Emission 30MHz ~ 25GHz

Channel 19 (2440MHz)	
100kHz PSD Reference Level	Spurious Emission 30MHz ~ 25GHz
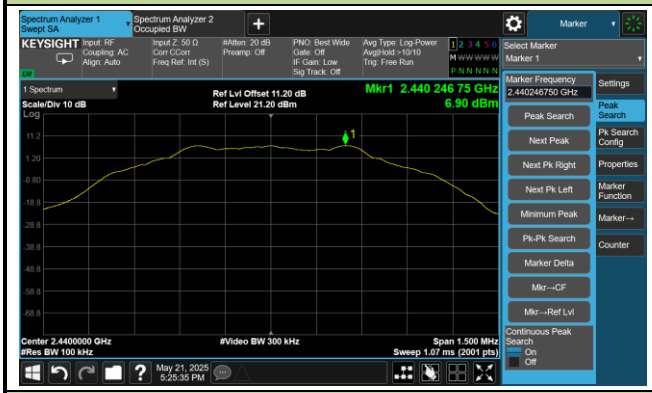	
Channel 39 (2480MHz)	
100kHz PSD Reference Level	High Band Edge
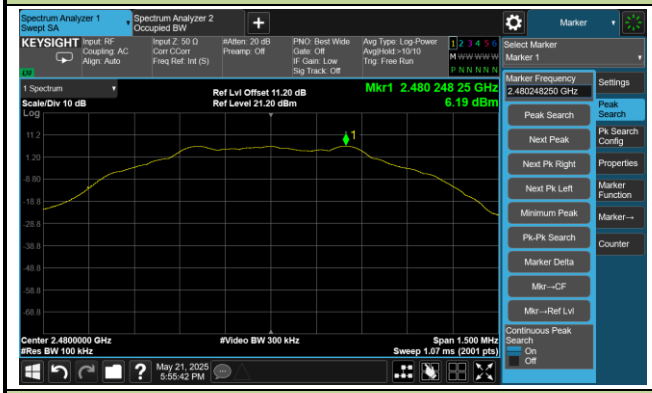	
Spurious Emission 30MHz ~ 25GHz	
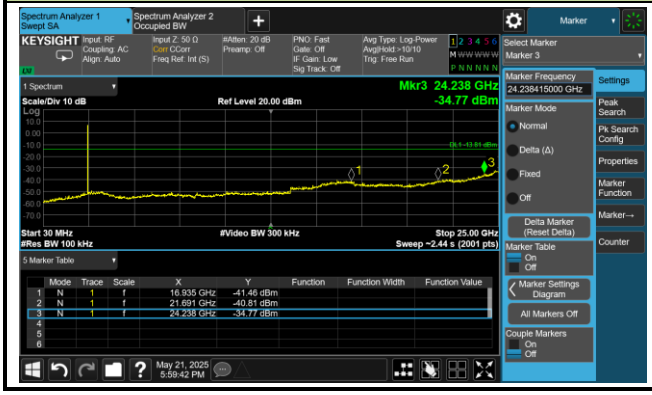	

BLE-2Mbps Out-of-Band Emissions

Channel 00 (2402MHz)

100kHz PSD Reference Level

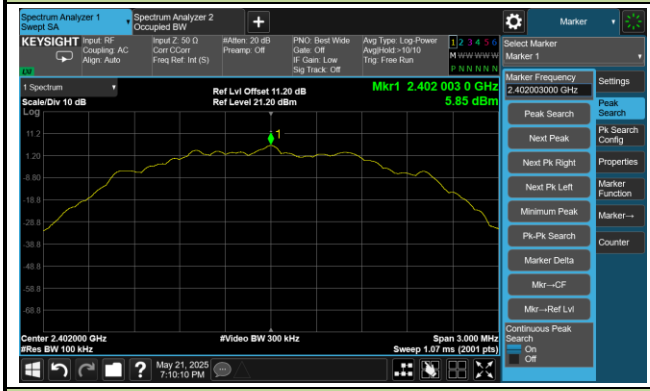

Low Band Edge

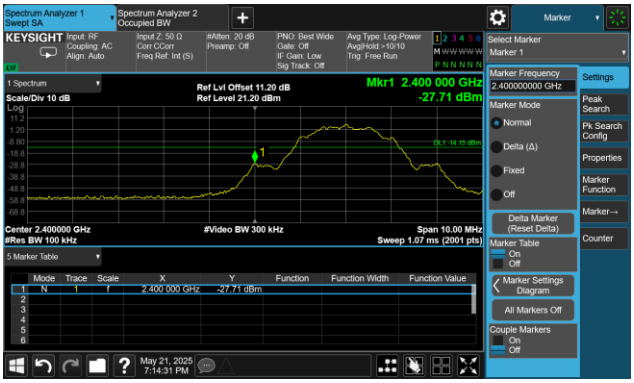

Spurious Emission 30MHz ~ 25GHz

Channel 19 (2440MHz)

100kHz PSD Reference Level

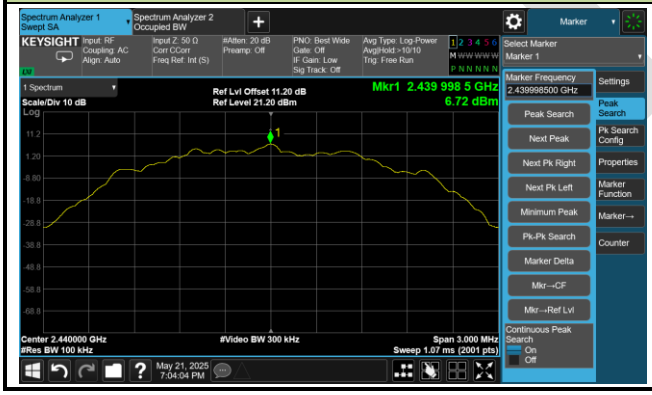

Spurious Emission 30MHz ~ 25GHz

Channel 39 (2480MHz)	
100kHz PSD Reference Level	High Band Edge
	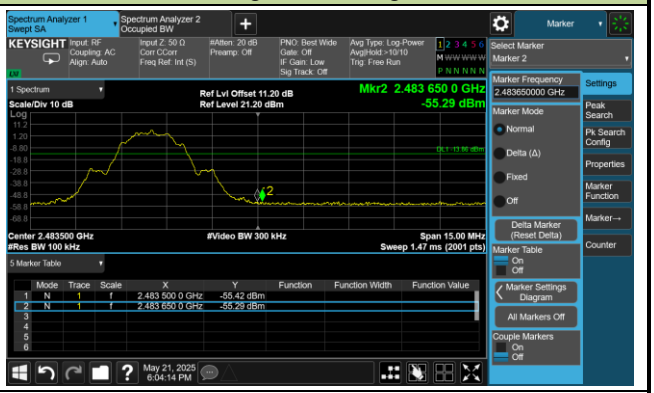
Spurious Emission 30MHz ~ 25GHz	
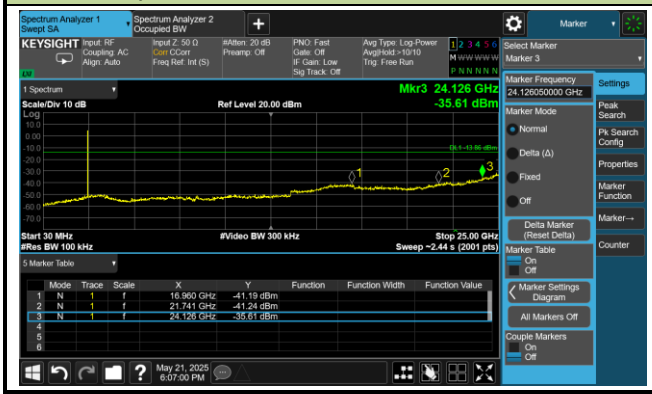	

Test Site	SIP-TR1	Test Engineer	Alan Yu
Test Date	2025-05-21	Radio	1

Test Mode	Data Rate / Mbps	Channel No.	Frequency (MHz)	Limit	Result
BLE	1	00	2402	20	Pass
BLE	1	19	2440	20	Pass
BLE	1	39	2480	20	Pass
BLE	2	00	2402	20	Pass
BLE	2	19	2440	20	Pass
BLE	2	39	2480	20	Pass

BLE-1Mbps Out-of-Band Emissions

Channel 00 (2402MHz)

100kHz PSD Reference Level

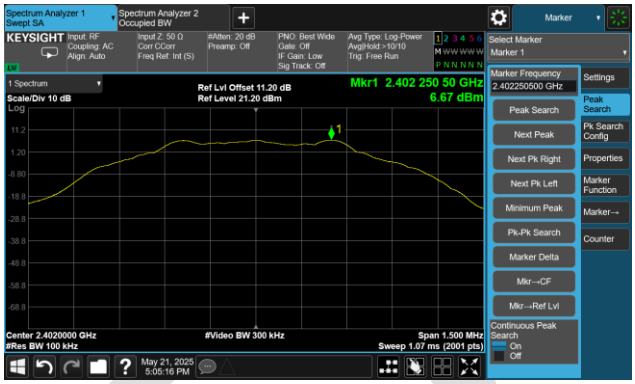

Low Band Edge

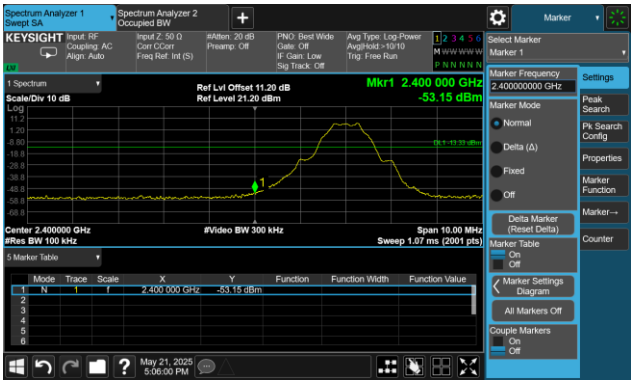

Spurious Emission 30MHz ~ 25GHz

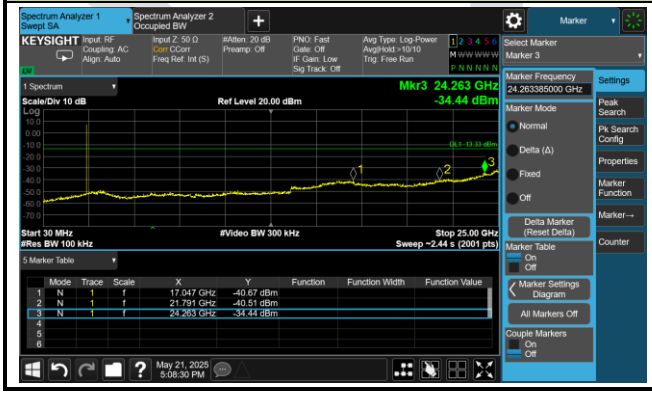

Channel 19 (2440MHz)	
100kHz PSD Reference Level	Spurious Emission 30MHz ~ 25GHz
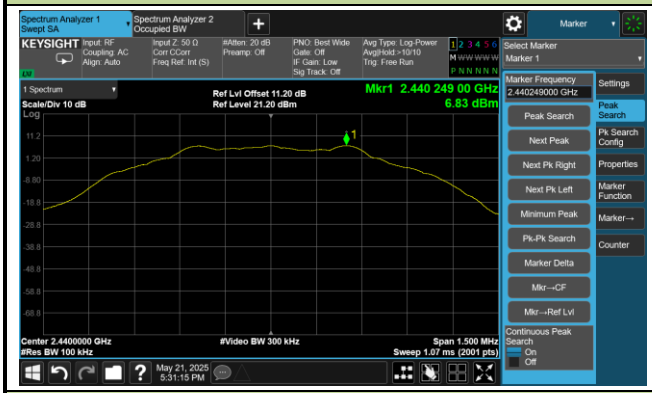	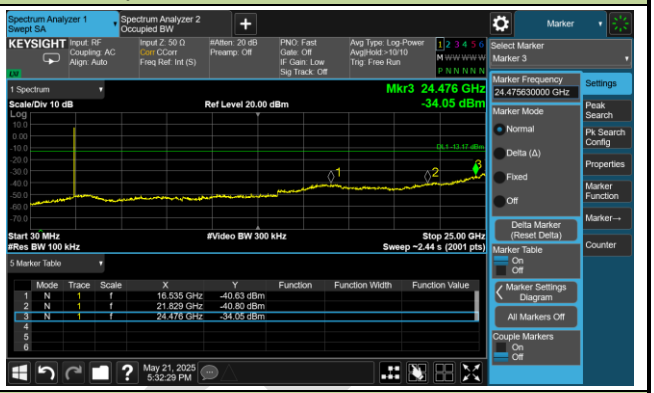
Channel 39 (2480MHz)	
100kHz PSD Reference Level	High Band Edge
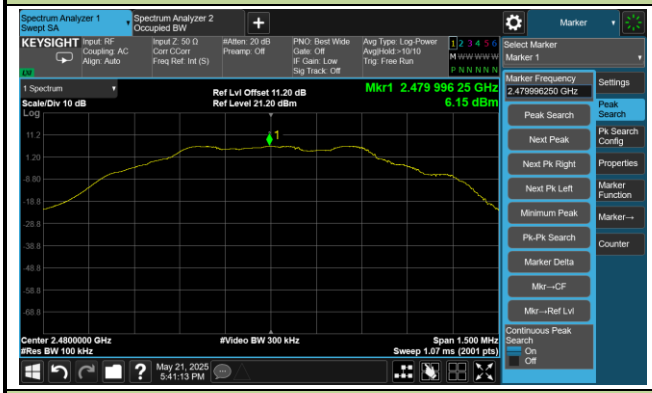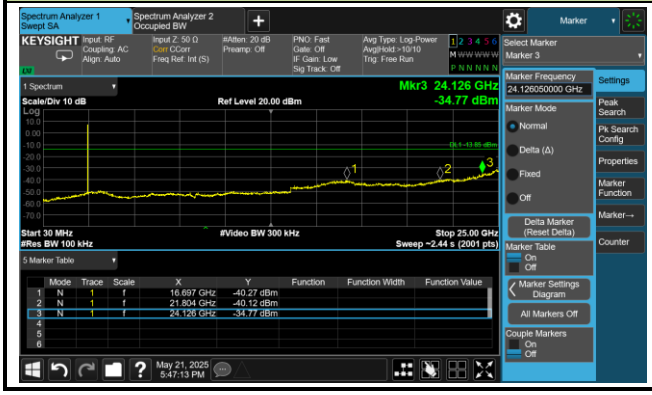	
Spurious Emission 30MHz ~ 25GHz