



ELECTROMAGNETIC RESEARCH INSTITUTE



EMI TEST REPORT

Emission of electromagnetic disturbance

Test Report No. : ERI-FCC03-0042

Equipment : Digital presentation device

Name of basic model : DM-P200

Family model : N/A

Manufacturer : GUANGZHOU DEBAO YUCHANG ELECTRONICS CO.,Ltd

Applicant : D.M. Technology Co., Ltd.

Tested date : 2003. 6. 18

Issued date : 2003. 6. 19

Test results : PASS

Test Standards : FCC Part 15 Subpart B (Class B) / Verification
/digital devices & peripherals

Test Procedure and Items:

- AC Power line Conducted emissions measurement : ANSI C63.4-1992
- Radiated emissions measurement : ANSI C63.4-1992

Tested by: YOUNG-SIK, KIM

Approved by: UK-CHO, RIM

The results in this report apply only to the sample tested.
This test report shall not be reproduced except in full, without the written approval of **ERI Laboratory**.

CONTENTS

1. CLIENT INFORMATION
2. LABORATORY INFORMATION
3. EQUIPMENT UNDER TEST INFORMATION(EUT)
 - 3.1 Identification of the EUT
 - 3.2 Additional information about the EUT
 - 3.3 Peripheral equipment
4. CONTINUOUS DISTURBANCE VOLTAGE, MAIN TERMINAL
 - 4.1 Operating environment
 - 4.2 Test set-up and test procedures5
 - 4.3 Test instrument
 - 4.4 Test results
5. RADIATED DISTURBANCE : 30MHz – 1000MHz
 - 5.1 Operating environment
 - 5.2 Test set-up
 - 5.3 Test conditions
 - 5.4 Test instrument
 - 5.5 Test results(Test mode: play mode)

APPENDIX

(N/A)

1. CLIENT INFORMATION

The EUT has been tested by request of :

Company : D.M. Technology Co., Ltd.
Address : 5th F1., Mando Bldg. 730 Dang-dong, Gunpo, Kyunggi-do,
Korea 435-010
Name of contact : TONG JIN, PARK
Telephone : + 82-31-451-4526
Facsimile : + 82-31-451-4520

2. LABORATORY INFORMATION

The 10m full-anechoic chamber and/or EMC facilities are used for these testing.
These facilities were accredited by KOLAS, EK, MIC of Korea and FCC of USA.

Address

ELECTROMAGNETIC RESEARCH INSTITUTE.

66-6, JEIL-RI, YANGJI-MYUN, YOUNGIN-CITY, KYUNGGI-DO, KOREA

Telephone No. : +82-31-336-1186~7

Facsimile No. : +82-31-336-1184

Registered No.

KOLAS : 111

EK : J

MIC : KR0030

FCC Filing No. : 302567

3. EQUIPMENT UNDER TEST INFORMATION(EUT)

3.1 Identification of the EUT

Type of equipment : Digital Presentation device
Model name : DM-P200
Brand name : ALVA
Manufacturer : GUANGZHOU DEBAO YUCHANG ELECTRONICS CO.,Ltd
Address : 36-1 bangjiang Village East, Shilian Road, Shiji Town,
Panyu Qu, Guangzhou City, Guangdong, China
Telephone : + 86-20-3456-1861
Facsimile : + 86-20-3456-1832
Country of origin : CHINA

Rating : 120V, 60Hz

3.2 Additional information about the EUT

Class B, Family model list; (N/A)

3.3 Peripheral equipment

Defined as equipment needed for correct operation of the EUT.

Description	Model No.	Serial No.	Manufacture
AC/DC adaptor	ADP-60DB	MJD0124008510	Delta electronics Co., Ltd.
Note PC	CM2080	5Y17JNZ9R622	LG
Printer	C6427A	CN13V1B1RY	HP
AC/DC power supply	STP032030E	N/A	D.M. Technology Co., Ltd.
Earphone	N/A	N/A	"
Smart card	N/A	N/A	Transcend

4. CONTINUOUS DISTURBANCE VOLTAGE, MAIN TERMINAL


: Frequency range 0.15 MHz to 30 MHz

4.1 Operating environment

Temperature : 23.0 °C

Relative Humidity : 48.0 %

4.2 Test set-up and test procedures

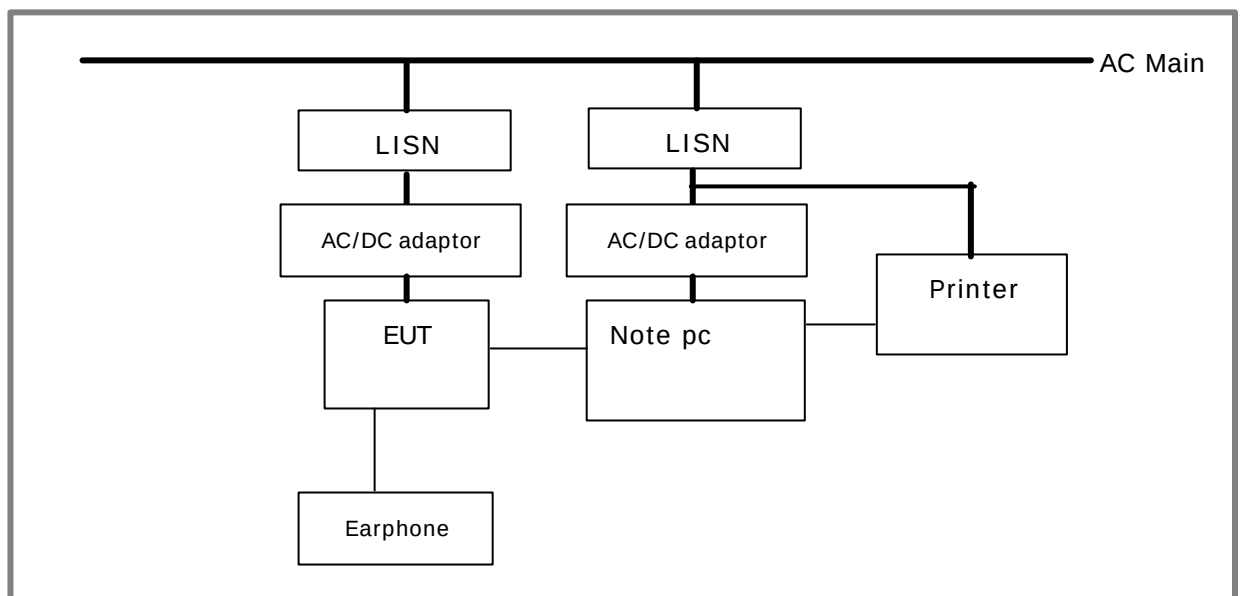

The mains terminal disturbance voltage was measured with the equipment under

test(EUT) in a shield room. The EUT was connected to an artificial mains network(LISN) placed on the floor. The EUT was placed on non-metallic table 0.4m above the metallic, grounded floor. The distance to other metallic surface was at least 0.8m.

Amplitude measurements were performed with a quasi-peak detector and an average detector.

Operation condition: During the test, we played on the record file.

4.3 Test instrument

Instrument	Model No	Serial No.	Makers	Next cal.date	Used
Test receiver	ESCS30	100021	R&S	2004. 1. 24	x
L.I.S.N.	ESH3-Z5	827246/008	R&S	2004. 3. 19	x
	ESH3-Z5	831887/018	R&S	2004. 3. 19	x
Shield room	8 × 6 × 3.3m/H	-	-	-	x

4.4 Test results


Date of test: Jun 18, 2003.

An overview sweep performed with peak detector & average detector are included in the report **as test reports**.


Frequency Range [MHz]	Tested Freq. [MHz]	LISN	Meter Reading		Limits		Margin	
			QP	AV	QP	AV	QP	AV
			[dBuV]		[dBuV]		[dBuV]	
0.15-30	0.177	N	30.5	23.1	65.6	55.6	0.177	N
	0.216	N	31.4	23.2	63.0	53.0	0.216	N
	0.234	N	31.9	24.8	62.3	52.3	0.234	N
	0.321	N	31.7	22.8	59.6	49.6	0.321	N
	0.375	N	34.7	27.5	58.3	48.3	0.375	N
	0.465	N	39.9	31.5	56.5	46.5	0.465	N
	1.890	N	30.7	21.7	56.0	46.0	1.890	N
	2.040	N	30.7	22.8	56.0	46.0	2.040	N
	2.680	N	30.8	26.5	56.0	46.0	2.680	N
	2.980	N	32.1	27.8	56.0	46.0	2.980	N

* <5 : mean less than 5dB

* Other frequency keep over 20dB margin.

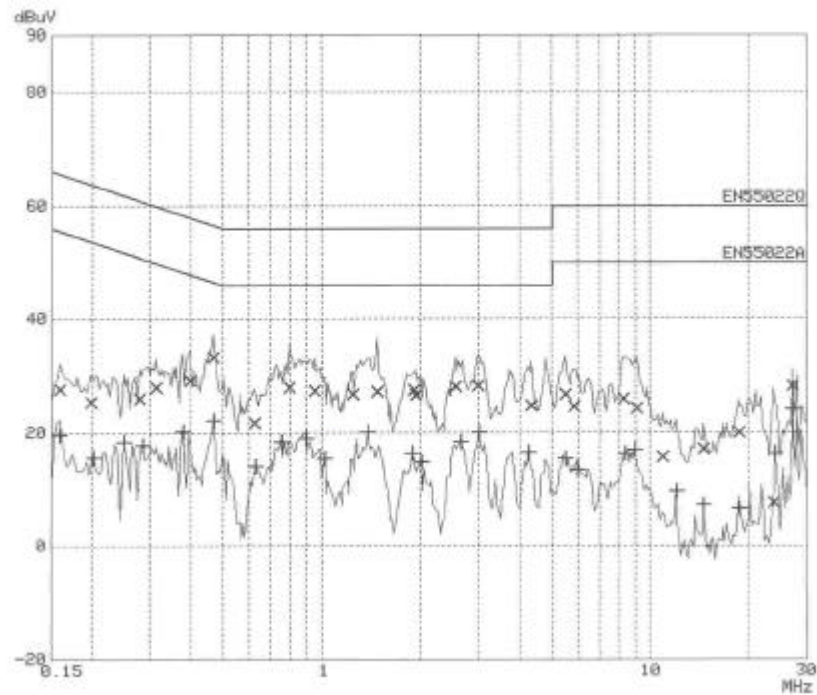

[Hot line]

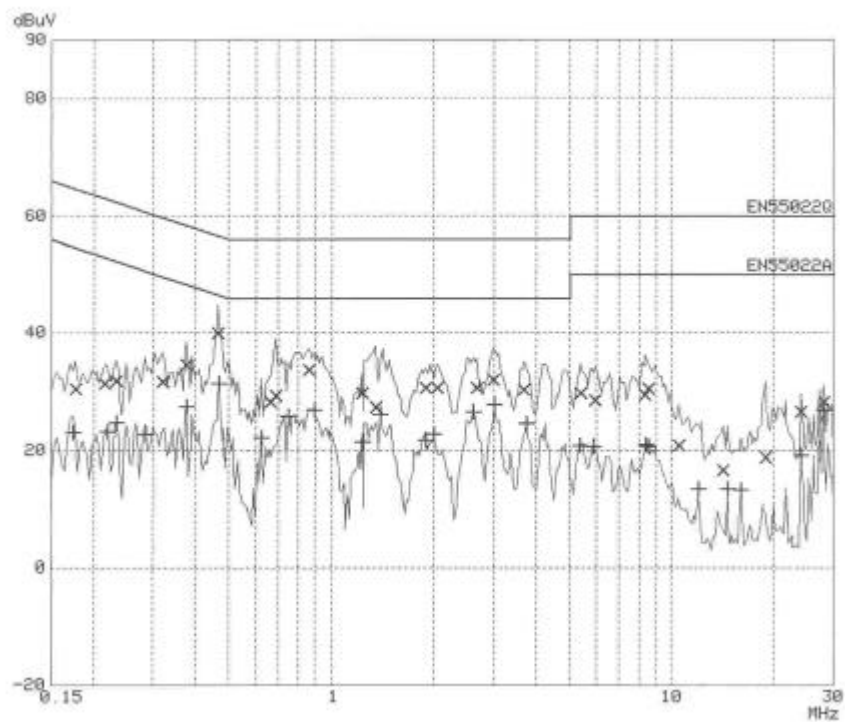

[Neutral line]

5. RADIATED DISTURBANCE

: 30MHz – 1000MHz

5.1 Operating environment

Temperature : 22.0 °C

Relative Humidity : 55.0 %

5.2 Test set-up

The frequency range investigated was 30 MHz to 1000 MHz.

All readings are quasi-peak unless stated otherwise.

The half-wave dipole antenna was tuned to the frequency found during Preliminary radiated measurements. The EUT, support equipment and Interconnecting cables were re-configured to the set-up to the producing the Maximum emission for the frequency and were placed on top of a 0.8 meter High non-metallic 1 X 1.5 meter table. The EUT, support equipment, and interconnecting cables were re-arranged and manipulated to maximize each EME emission.


The turntable containing the system was rotated the antenna height was varied 1 to 4 meters

and stopped at the azimuth or height producing the maximum emission.

And this device(EUT) was tested in 3 orthogonal planes.

The antenna measured both horizontal and vertical polarization.



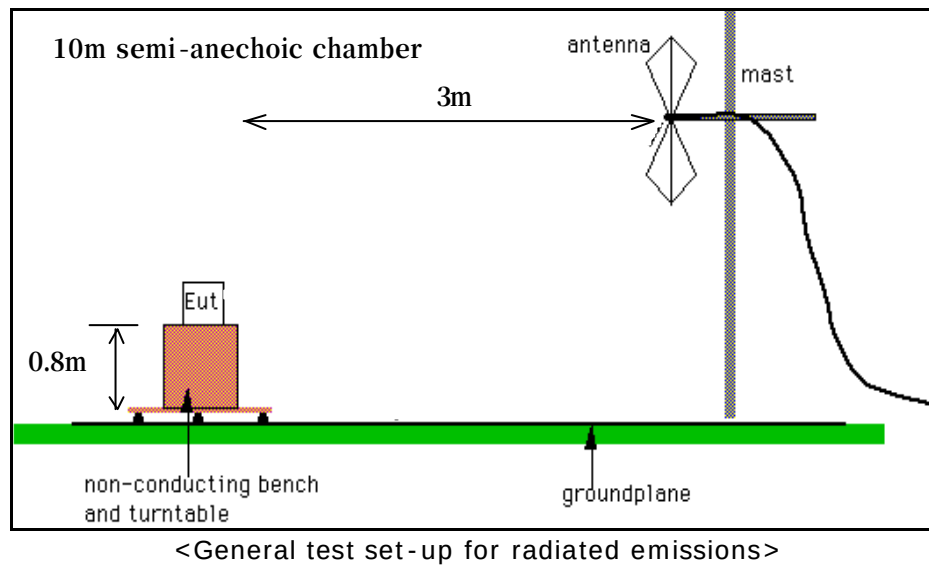

5.3 Operation Conditions

During the test, we played on the record file.

5.4 Test instrument

Instrument	Model No.	Serial No.	Makers	Next cal.date	Used
Test receiver	ESCS30	100021	R&S	2004. 1. 24	X
L.I.S.N.	ESH3-Z5	827246/008	R&S	2004. 3. 19	X
	ESH3-Z5	831887/018	R&S	2004. 3. 19	X

5.5 Test results(Test mode :)

Date of test: Jun 18, 2003.

Freq (MHz)	Reading (dBuV)	Ant	AF (dB)	CL (dB)	Result (dBuV / m)	Limit (dB)	Margin (dB)
97.50	20.16	H	9.22	2.30	31.68	43.50	11.82
102.20	22.25	H	10.31	2.40	34.96	43.50	8.54
146.10	14.74	H	14.70	2.70	32.14	43.50	11.36
150.20	6.87	V	14.99	2.80	24.66	43.50	18.84
229.00	5.74	H	16.70	3.50	25.94	46.00	20.06
243.30	8.90	H	17.10	3.50	29.50	46.00	16.50
287.90	12.06	H	18.45	3.70	34.21	46.00	11.79
433.00	13.82	V	16.27	4.30	34.39	46.00	11.61
489.00	14.51	V	17.06	4.60	36.17	46.00	9.83
622.00	11.34	V	18.88	5.20	35.42	46.00	10.58
685.00	12.29	V	19.79	5.30	37.38	46.00	8.62
853.00	7.10	V	21.51	6.20	34.81	46.00	11.19

* Receiving Antenna Mode : **Horizontal, Vertical**

* <5 : mean less than 5dB

Note : Reading = Test Receiver meter, P= Polarization $\nearrow$ POL H = Horizontal POL V = Vertical A = Angle, AF = Antenna Factor CL = Cable Loss Result = Field Strength(AF + CL+ Reading)

Result: Pass

The measured emissions level of the EUT have found the below of the specified limit.