RF EXPOSURE LAB, LLC

2867 Progress Place, Suite 4D • Escondido, CA 92029 • U.S.A.
TEL (760) 737-3131 • FAX (760) 737-9131
http://www.rfexposurelab.com

# CERTIFICATE OF COMPLIANCE
# SAR EVALUATION

CardioNet Inc.
1010 Second Ave., #700
San Diego, CA 92101

Dates of Test: April 12-13 & 26-28, 2006
Test Report Number: SAR.20060402

| | |
|---|---|
| FCC ID: | QBI - 1009 |
| Model(s): | 100-0023-01 |
| Test Sample: | Pre-Production Unit same as Production |
| Serial No.: | 10061 |
| Equipment Type: | Wireless Medical Monitor |
| Classification: | Portable Transmitter Next to Head and Body |
| TX Frequency Range: | 902 – 928 MHz, 824.7 – 848.31 (CDMA), 1851.25 – 1908.75 (PCS) |
| Frequency Tolerance: | ± 75 ppm (900 MHz), ± 2.5 ppm (CDMA, PCS) |
| Maximum RF Output: | 15 dBm (900 MHz), 24 dBm (CDMA), 24 dBm (PCS) Conducted |
| Signal Modulation: | OFDM, CDMA |
| Antenna Type (Length): | Internal(900 MHz, World Products P/N WPSMLANT015A), Ext. Stubby (Cellular, Galtronics P/N C-26532-114-3195) |
| Battery: | P/N 390-0038-01 Battery Pack |
| Application Type: | Certification |
| FCC Rule Parts: | Part 15.247, Part 22H, Part 24E |

This wireless mobile and/or portable device has been shown to be compliant for localized specific absorption rate (SAR) for uncontrolled environment/general exposure limits specified in ANSI/IEEE Std. C95.1-1999 and had been tested in accordance with the measurement procedures specified in IEEE 1528-2003, OET Bulletin 65 Supp. C, RSS-102 and Safety Code 6 (See test report).

I attest to the accuracy of the data. All measurements were performed by myself or were made under my supervision and are correct to the best of my knowledge and belief. I assume full responsibility for the completeness of these measurements and vouch for the qualifications of all persons taking them.

RF Exposure Lab, LLC certifies that no party to this application has been denied FCC benefits pursuant to Section 5301 of the Anti-Drug Abuse Act of 1988, 21 U.S.C. 853(a).

Jay M. Moulton
Vice President

ACCREDITED
Certificate # 2387.01

© 2005 RF Exposure Lab, LLC
*This report shall not be reproduced except in full without the written approval of RF Exposure Lab, LLC.*

# Table of Contents

1. Introduction ..... 3
SAR Definition [5] ..... 3
2. SAR Measurement Setup ..... 4
Robotic System ..... 4
System Hardware ..... 4
System Description ..... 4
E-Field Probe ALS-E-020 ..... 5
3. Robot Specifications ..... 7
4. Probe and Dipole Calibration ..... 8
5. Phantom & Simulating Tissue Specifications ..... 9
SAM Phantom ..... 9
Brain & Muscle Simulating Mixture Characterization ..... 9
Device Holder ..... 9
6. Definition of Reference Points ..... 10
Ear Reference Point ..... 10
Device Reference Points ..... 10
7. Test Configuration Positions ..... 11
Positioning for Cheek/Touch [5] ..... 11
Positioning for Ear / 15° Tilt [5] ..... 12
Body Worn Configurations ..... 13
8. ANSI/IEEE C95.1 – 1999 RF Exposure Limits [2] ..... 14
Uncontrolled Environment ..... 14
Controlled Environment ..... 14
9. Measurement Uncertainty ..... 15
10. System Validation ..... 16
Tissue Verification ..... 16
° ..... **Error! Bookmark not defined.**
Test System Verification ..... 17
11. SAR Test Data Summary ..... 18
Procedures Used To Establish Test Signal ..... 18
Device Test Condition ..... 18
SAR Data Summary – 900 MHz Head ..... 19
SAR Data Summary – 900 MHz Body ..... 20
SAR Data Summary – 835 MHz Head (CDMA) ..... 21
SAR Data Summary – 835 MHz Body (CDMA) ..... 21
SAR Data Summary – 1900 MHz Head (PCS) ..... 23
SAR Data Summary – 1900 MHz Body (PCS) ..... 24
12. Test Equipment List ..... 25
13. Conclusion ..... 26
14. References ..... 27
Appendix A – System Validation Plots and Data ..... 28
Appendix B – SAR Test Data Plots ..... 58
Appendix C – SAR Test Setup Photos ..... 153
Appendix D – Probe Calibration Data Sheets ..... 162
Appendix E – Dipole Calibration Data Sheets ..... 203
Appendix F – Phantom Calibration Data Sheets ..... 226

© 2005 RF Exposure Lab, LLC

*This report shall not be reproduced except in full without the written approval of RF Exposure Lab, LLC.*

# 1. Introduction

This measurement report shows compliance of the CardioNet Inc. Model Gateway MNV FCC ID: QBI - 1009 with FCC Part 2, 1093, ET Docket 93-62 Rules for mobile and portable devices. The FCC have adopted the guidelines for evaluating the environmental effects of radio frequency radiation in ET Docket 93-62 on August 6, 1996 to protect the public and workers from the potential hazards of RF emissions due to FCC regulated portable devices. [1], [6]

The test procedures, as described in ANSI C95.1 – 1999 Standard for Safety Levels with Respect to Human Exposure to Radio Frequency Electromagnetic Fields, 3 kHz to 300 GHz [2], ANSI C95.3 – 2002 Recommended Practice for the Measurement of Potentially Hazardous Electromagnetic Fields [3], FCC OET Bulletin 65 Supp. C – 2001 [4], IEEE Std.1528 – 2003 Recommended Practice [5], and Industry Canada Safety Code 6 Limits of Human Exposure to Radiofrequency Electromagnetic Fields in the Frequency Range from 3kHz to 300 GHz were employed.

## SAR Definition [5]

Specific Absorption Rate is defined as the time derivative (rate) of the incremental energy (*dW*) absorbed by (dissipated in) an incremental mass (*dm*) contained in a volume element (*dV*) of a given density ($\rho$).

$$SAR = \frac{d}{dt}\left(\frac{dW}{dm}\right) = \frac{d}{dt}\left(\frac{dW}{\rho dV}\right)$$

SAR is expressed in units of watts per kilogram (W/kg). *SAR* can be related to the electric field at a point by

$$SAR = \frac{\sigma \mid E \mid^2}{\rho}$$

where:

$\sigma$ = conductivity of the tissue (S/m)

$\rho$ = mass density of the tissue (kg/m$^3$)

*E* = rms electric field strength (V/m)


*This report shall not be reproduced except in full without the written approval of RF Exposure Lab, LLC.*

# 2. SAR Measurement Setup

## Robotic System

The measurements are conducted utilizing the ALSAS-10-U automated dosimetric assessment system. The ALSAS-10-U is designed and manufactured by Aprel Laboratories in Nepean, Ontario, Canada. The system utilizes a Robcomm 3 robot manufactured by ThermoCRS located in Michigan USA.

## System Hardware

The system consists of a six axis articulated arm, controller for precise probe positioning (0.05 mm repeatability), a power supply, a teach pendent for teaching area scans, near field probe, an IBM Pentium 4™ 2.66 GHz PC with Windows XP Pro™, and custom software developed to enable communications between the robot controller software and the host operating system.

An amplifier is located on the articulated arm, which is isolated from the custom designed end effector and robot arm. The end effector provides the mechanical touch detection functionality and probe connection interface. The amplifier is functionally validated within the manufacturer's site and calibrated at NCL Calibration Laboratories. A Data Acquisition Card (DAC) is used to collect the signal as detected by the isotropic e-field probe. The DAC manufacturer calibrates the DAC to NIST standards. A formal validation is executed using all mechanical and electronic components to prove conformity of the measurement platform as a whole.

## System Description

The ALSAS-10-U has been designed to measure devices within the compliance environment to meet all recognized standards. The system also conforms to standards, which are currently being developed by the scientific and manufacturing community.

The course scan resolution is defined by the operator and reflects the requirements of the standard to which the device is being tested. Precise measurements are made within the predefined course scan area and the values are logged.

The user predefines the sample rate for which the measurements are made so as to ensure that the full duty-cycle of a pulse modulation device is covered during the sample. The following algorithm is an example of the function used by the system for linearization of the output for the probe.

$$V_i = U_i + U_i^2 \bullet \frac{cf}{dcp_i}$$


*This report shall not be reproduced except in full without the written approval of RF Exposure Lab, LLC.*

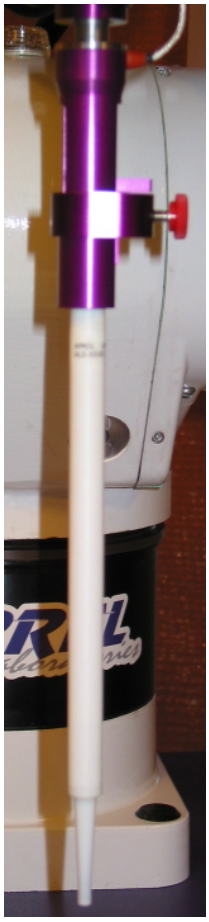

The Aprel E-Field probe is evaluated to establish the diode compression point.

A complex algorithm is then used to calculate the values within the measured points down to a resolution of 1mm. The data from this process is then used to provide the co-ordinates from which the cube scan is created for the determination of the 1 g and 10 g averages.

Cube scan averaging consists of a number of complex algorithms, which are used to calculate the one, and ten gram averages. The basis for the cube scan process is centered on the location where the maximum measured SAR value was found. When a secondary peak value is found which is within 60% of the initial peak value, the system will report this back to the operator who can then assess the need for further analysis of both the peak values prior to the one and ten-gram cube scan averaging process. The algorithm consists of 3D cubic Spline, and Lagrange extrapolation to the surface, which form the matrix for calculating the measurement output for the one and ten gram average values. The resolution for the physical scan integral is user defined with a final calculated resolution down to 1mm.

In-depth analysis for the differential of the physical scanning resolution for the cube scan analysis has been carried out, to identify the optimum setting for the probe positioning steps, and this has been determined at 8mm increments on the X, & Y planes. The reduction of the physical step increment increased the time taken for analysis but did not provide a better uncertainty or return on measured values.

The final output from the system provides data for the area scan measurements, physical and splined (1mm resolution) cube scan with physical and calculated values (1mm resolution).

The overall uncertainty for the methodology and algorithms the ALSAS-10-U used during the SAR calculation was evaluated using the data from IEEE 1528 f3 algorithm:

$$f_3(x,y,z) = A\frac{a^2}{\frac{a^2}{4} + x'^2 + y'^2}\left(e^{-\frac{2z}{a}} + \frac{a^2}{2(a+2z)^2}\right)$$

The probe used during the measurement process has been assessed to provide values for diode compression. These values are calculated during the probe calibration exercise and are used in the mathematical calculations for the assessment of SAR.

## E-Field Probe ALS-E-020

The E-field probe used by RF Exposure Lab, LLC, has been fully calibrated and assessed for isotropic, and boundary effect. The probe utilizes a triangular sensor arrangement as detailed in the diagram below right.


*This report shall not be reproduced except in full without the written approval of RF Exposure Lab, LLC.*




Δ-BEAM




The SAR is assessed with the probe which moves at a default height of 5mm from the center of the diode, which is mounted to the sensor, to the phantom surface (Z height). The diagram above right shows how the center of the sensor is defined with the location of the diode placed at the center of the dipole. The 5mm default in the Z axis is the optimum height for assessing SAR where the boundary effect is at its least, with the probe located closest to the phantom surface (boundary).


*This report shall not be reproduced except in full without the written approval of RF Exposure Lab, LLC.*

# 3. Robot Specifications

## Specifications

| | |
|---|---|
| Positioner: | ThermoCRS, Robot Model: Robocomm 3 |
| Repeatability: | 0.05 mm |
| No. of axis: | 6 |

## Data Acquisition Card (DAC) System

### Cell Controller

| | |
|---|---|
| Processor: | Pentium 4™ |
| Clock Speed: | 2.66 GHz |
| Operating System: | Windows XP Pro™ |

### Data Converter

| | |
|---|---|
| Features: | Signal Amplifier, End Effector, DAC |
| Software: | ALSAS 10-U Software |

## E-Field Probe

| | |
|---|---|
| Model: | ALS-E-020 |
| Serial Number: | RFE-215 |
| Construction: | Triangular Core Touch Detection System |
| Frequency: | 10MHz to 6GHz |

## Phantom

| | |
|---|---|
| Phantom: | Uniphantom, Right Phantom, Left Phantom |

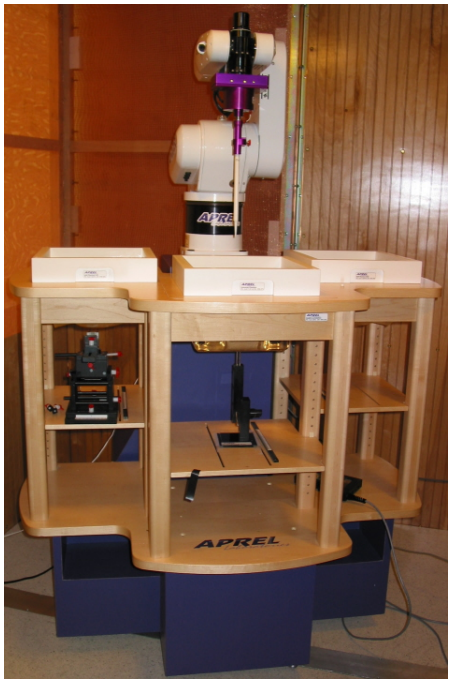



*This report shall not be reproduced except in full without the written approval of RF Exposure Lab, LLC.*

# 4. Probe and Dipole Calibration

**See Appendix D and E.**


*This report shall not be reproduced except in full without the written approval of RF Exposure Lab, LLC.*

# 5. Phantom & Simulating Tissue Specifications

## SAM Phantom

The Aprel system utilizes three separate phantoms. Each phantom for SAR assessment testing is a low loss dielectric shell, with shape and dimensions derived from the anthropomorphic data of the 90th percentile adult male head dimensions as tabulated by the US Army. The SAM phantom shell is bisected along the mid sagittai plane into right and left halves. The perimeter sidewalls of each phantom half is extended to allow filling with liquid to a depth of 15 cm that is sufficient to minimize reflections from the upper surface [5]. See photos in Appendix C.

## Brain & Muscle Simulating Mixture Characterization

The brain and muscle mixtures consist of a glycol based chemical and saline solution. The mixture is calibrated to obtain proper dielectric constant (permittivity) and conductivity of the desired tissue. The head tissue dielectric parameters recommended by the IEEE SCC-34/SC-2 have been incorporated in the following tables. Other head and body tissue parameters that have not been specified in P1528 are derived from the issue dielectric parameters computed from the 4-Cole-Cole equations.

**Table 5.1 Typical Composition of Ingredients for Tissue**

| Ingredients | | Simulating Tissue | | | |
|---|---|---|---|---|---|
| | | 835/900 MHz Brain | 835/900 MHz Muscle | 1900 MHz Brain | 1900 MHz Muscle |
| Mixing Percentage | | | | | |
| Water | | 51.07 | 65.45 | 54.88 | 69.91 |
| Sugar | | 47.31 | 34.31 | 0.00 | 0.00 |
| Salt | | 1.15 | 0.62 | 0.21 | 0..13 |
| HEC | | 0.23 | 0.26 | 0.00 | 0.00 |
| Bactericide | | 0.24 | 0.10 | 0.00 | 0.00 |
| DGBE | | 0.00 | 0.00 | 44.91 | 29.96 |
| Dielectric Constant | Target | 41.50 | 56.1/56.8 | 40.00 | 54.2 |
| Conductivity (S/m) | Target | 0.90/0.97 | 0.95/1.00 | 1.40 | 1.50 |

## Device Holder

In combination with the SAM phantom, the mounting device enables the rotation of the mounted transmitter in spherical coordinates whereby the rotation point is the ear opening. The devices can easily, accurately, and repeatably be positioned according to the FCC specifications. The device holder can be locked at different phantom locations (left head, right head, and uni-phantom).


*This report shall not be reproduced except in full without the written approval of RF Exposure Lab, LLC.*

# 6. Definition of Reference Points

## Ear Reference Point

Figure 6.2 shows the front, back and side views of the SAM Phantom. The point "M" is the reference point for the center of the mouth, "LE" is the left ear reference point (ERP), and "RE" is the right ERP. The ERPs are 15mm posterior to the entrance to the ear canal (EEC) along the B-M line (Back-Mouth), as shown in Figure 6.1. The plane passing through the two ear canals and M is defined as the Reference Plane. The line N-F (Neck-Front) is perpendicular to the reference plane and passing through the RE (or LE) is called the Reference Pivoting Line (see Figure 6.1). Line B-M is perpendicular to the N-F line. Both N-F and B-M lines are marked on the external phantom shell to facilitate handset positioning [5].




**Figure 6.1 Close-up side view of ERP's**

**Figure 6.2 Front, back and side view of SAM**

## Device Reference Points

Two imaginary lines on the device need to be established: the vertical centerline and the horizontal line. The test device is placed in a normal operating position with the "test device reference point" located along the "vertical centerline" on the front of the device aligned to the "ear reference point" (See Fig. 6.3). The "test device reference point" is than located at the same level as the center of the ear reference point. The test device is positioned so that the "vertical centerline" is bisecting the front surface of the device at it's top and bottom edges, positioning the "ear reference point" on the outer surface of both the left and right head phantoms on the ear reference point [5].

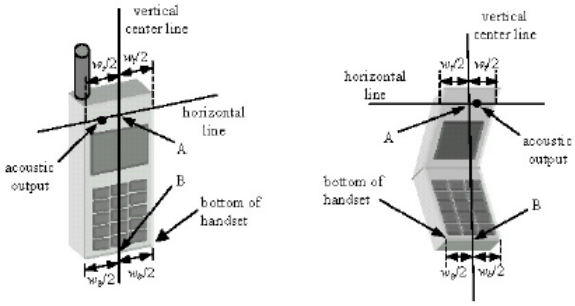


**Figure 6.3 Handset Vertical Center & Horizontal Line Reference Points**


*This report shall not be reproduced except in full without the written approval of RF Exposure Lab, LLC.*

# 7. Test Configuration Positions

## Positioning for Cheek/Touch [5]

1. Position the device close to the surface of the phantom such that point A is on the (virtual) extension of the line passing through points RE and LE on the phantom (see Figure 7.1), such that the plane defined by the vertical center line and the horizontal line of the device is approximately parallel to the sagittal plane of the phantom.

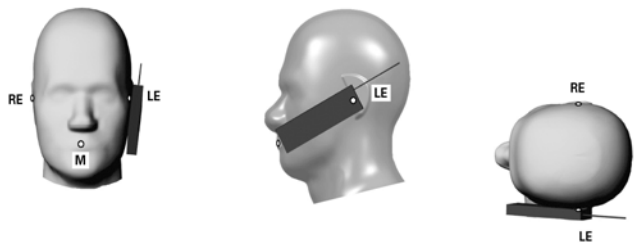


**Figure 7.1 Front, Side and Top View of Cheek/Touch Position**

2. Translate the device towards the phantom along the line passing through RE and LE until the device touches the ear.

3. While maintaining the device in this plane, rotate it around the LE-RE line until the vertical centerline is in the plane normal to MB-NF including the line MB (called the reference plane).

4. Rotate the device around the vertical centerline until the device (horizontal line) is symmetrical with respect to the line NF.

5. While maintaining the vertical centerline in the reference plane, keeping point A on the line passing through RE and LE and maintaining the device contact with the ear, rotate the device about the line NF until any point on the device is in contact with a phantom point below the ear (cheek). See Figure 7.2.




**Figure 7.2 Side view w/ relevant markings**


*This report shall not be reproduced except in full without the written approval of RF Exposure Lab, LLC.*

## Positioning for Ear / 15° Tilt [5]

With the test device aligned in the Cheek/Touch Position":

1. While maintaining the orientation of the device, retracted the device parallel to the reference plane far enough to enable a rotation of the device by 15 degrees.

2. Rotate the device around the horizontal line by 15 degrees.

3. While maintaining the orientation of the device, move the device parallel to the reference plane until any part of the device touches the head. (In this position, point A is located on the line RE-LE). The tilted position is obtained when the contact is on the pinna. If the contact is at any location other than the pinna, the angle of the device shall be reduced. The tilted position is obtained when any part of the device is in contact with the ear as well as a second part of the device is in contact with the head (see Figure 7.3).

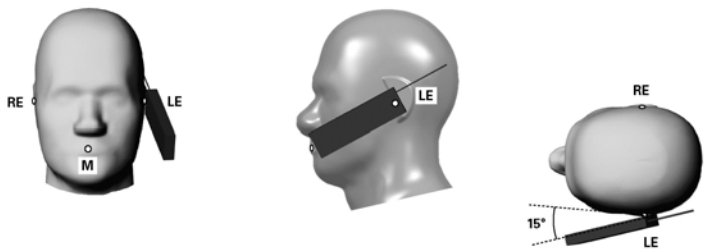


**Figure 7.3 Front, Side and Top View of Ear/15° Tilt Position**


*This report shall not be reproduced except in full without the written approval of RF Exposure Lab, LLC.*

## Body Worn Configurations

Body-worn operating configurations are tested with the accessories attached to the device and positioned against a flat phantom in a normal use configuration. A device with a headset output is tested with a headset connected to the device. Body dielectric parameters are used.

Accessories for Body-worn operation configurations are divided into two categories: those that do not contain metallic components and those that do contain metallic components. When multiple accessories that do not contain metallic components are supplied with the device, the device is tested with only the accessory that dictates the closest spacing to the body. Then, when multiple accessories that contain metallic components are supplied with the device, the device is tested with each accessory that contains a unique metallic component. If multiple accessories share an identical metallic component (i.e. the same metallic belt-clip used with different holsters with no other metallic components) only the accessory that dictates the closest spacing to the body is tested.

Body-worn accessories may not always be supplied or available as options for some devices intended to be authorized for body-worn use. In this case, a test configuration where a separation distance between the back of the device and the flat phantom is used. All test position spacings are documented.

Transmitters that are designed to operate in front of a person's face, as in push-to-talk configurations, are tested for SAR compliance with the front of the device positioned to face the flat phantom. For devices that are carried next to the body such as a shoulder, waist or chest-worn transmitters, SAR compliance is tested with the accessory(ies), including headsets and microphones, attached to the device and positioned against a flat phantom in a normal use configuration.

In all cases SAR measurements are performed to investigate the worst-case positioning. Worst-case positioning is then documented and used to perform Body SAR testing.

In order for users to be aware of the body-worn operating requirements for meeting RF exposure compliance, operating instructions and cautions statements are included in the user's manual.

© 2005 RF Exposure Lab, LLC

*This report shall not be reproduced except in full without the written approval of RF Exposure Lab, LLC.*

# 8. ANSI/IEEE C95.1 – 1999 RF Exposure Limits [2]

## Uncontrolled Environment

Uncontrolled Environments are defined as locations where there is the exposure of individuals who have no knowledge or control of their exposure. The general population/uncontrolled exposure limits are applicable to situations in which the general public may be exposed or in which persons who are exposed as a consequence of their employment may not be made fully aware of the potential for exposure or cannot exercise control over their exposure. Members of the general public would come under this category when exposure is not employment-related; for example, in the case of a wireless transmitter that exposes persons in its vicinity.

## Controlled Environment

Controlled Environments are defined as locations where there is exposure that may be incurred by persons who are aware of the potential for exposure, (i.e. as a result of employment or occupation). In general, occupational/controlled exposure limits are applicable to situations in which persons are exposed as a consequence of their employment, who have been made fully aware of the potential for exposure and can exercise control over their exposure. This exposure category is also applicable when the exposure is of a transient nature due to incidental passage through a location where the exposure levels may be higher than the general population/uncontrolled limits, but the exposed person is fully aware of the potential for exposure and can exercise control over his or her exposure by leaving the area or by some other appropriate means.

**Table 8.1 Human Exposure Limits**

| | UNCONTROLLED ENVIRONMENT<br>General Population<br>(W/kg) or (mW/g) | CONTROLLED ENVIROMENT<br>Professional Population<br>(W/kg) or (mW/g) |
|---|---|---|
| SPATIAL PEAK SAR[1]<br>Brain | 1.60 | 8.00 |
| SPATIAL AVERAGE SAR[2]<br>Whole Body | 0.08 | 0.40 |
| SPATIAL PEAK SAR[3]<br>Hands, Feet, Ankles, Wrists | 4.00 | 20.00 |

[1] The Spatial Peak value of the SAR averaged over any 1 gram of tissue (defined as a tissue volume in the shape of a cube) and over the appropriate averaging time.
[2] The Spatial Average value of the SAR averaged over the whole body.
[3] The Spatial Peak value of the SAR averaged over any 10 grams of tissue (defined as a tissue volume in the shape of a cube) and over the appropriate averaging time.


*This report shall not be reproduced except in full without the written approval of RF Exposure Lab, LLC.*

# 9. Measurement Uncertainty

## Exposure Assessment Measurement Uncertainty

| Source of Uncertainty | Tolerance Value | Probability Distribution | Divisor | $c_i^1$ (1-g) | $c_i^1$ (10-g) | Standard Uncertainty (1-g) % | Standard Uncertainty (10-g) % |
|---|---|---|---|---|---|---|---|
| | | | | | | | |
| Measurement System | | | | | | | |
| | | | | | | | |
| Probe Calibration | 3.5 | normal | 1 | 1 | 1 | 3.5 | 3.5 |
| Axial Isotropy | 3.7 | rectangular | •3 | $(1-cp)^{1/2}$ | $(1-cp)^{1/2}$ | 1.5 | 1.5 |
| Hemispherical Isotropy | 10.9 | rectangular | •3 | •cp | •cp | 4.4 | 4.4 |
| Boundary Effect | 1.0 | rectangular | •3 | 1 | 1 | 0.6 | 0.6 |
| Linearity | 4.7 | rectangular | •3 | 1 | 1 | 2.7 | 2.7 |
| Detection Limit | 1.0 | rectangular | •3 | 1 | 1 | 0.6 | 0.6 |
| Readout Electronics | 1.0 | normal | 1 | 1 | 1 | 1.0 | 1.0 |
| Response Time | 0.8 | rectangular | •3 | 1 | 1 | 0.5 | 0.5 |
| Integration Time | 1.7 | rectangular | •3 | 1 | 1 | 1.0 | 1.0 |
| RF Ambient Condition | 3.0 | rectangular | •3 | 1 | 1 | 1.7 | 1.7 |
| Probe Positioner Mech. | 0.4 | rectangular | •3 | 1 | 1 | 0.2 | 0.2 |
| | | | | | | | |
| Restriction | | | | | | | |
| Probe Positioning with respect to Phantom Shell | 2.9 | rectangular | •3 | 1 | 1 | 1.7 | 1.7 |
| Extrapolation and Integration | 3.7 | rectangular | •3 | 1 | 1 | 2.1 | 2.1 |
| Test Sample Positioning | 4.0 | normal | 1 | 1 | 1 | 4.0 | 4.0 |
| Device Holder Uncertainty | 2.0 | normal | 1 | 1 | 1 | 2.0 | 2.0 |
| Drift of Output Power | 10.0 | rectangular | •3 | 1 | 1 | 5.8 | 5.8 |
| | | | | | | | |
| Phantom and Setup | | | | | | | |
| Phantom Uncertainty(shape & thickness tolerance) | 3.4 | rectangular | •3 | 1 | 1 | 2.0 | 2.0 |
| Liquid Conductivity(target) | 5.0 | rectangular | •3 | 0.7 | 0.5 | 2.0 | 1.4 |
| Liquid Conductivity(meas.) | 1.1 | normal | 1 | 0.7 | 0.5 | 0.8 | 0.6 |
| Liquid Permittivity(target) | 5.0 | rectangular | •3 | 0.6 | 0.5 | 1.7 | 1.4 |
| Liquid Permittivity(meas.) | 2.2 | normal | 1 | 0.6 | 0.5 | 1.3 | 1.1 |
| Combined Uncertainty | | RSS | | | | 11.0 | 10.8 |
| Combined Uncertainty (coverage factor=2) | | Normal(k=2) | | | | 22.0 | 21.7 |

© 2005 RF Exposure Lab, LLC

*This report shall not be reproduced except in full without the written approval of RF Exposure Lab, LLC.*

# 10. System Validation

## Tissue Verification

**Table 10.1 Measured Tissue Parameters**

| | | 835 MHz Head | | 900 MHz Head | | 835 MHz Head | | 900 MHz Head | |
|---|---|---|---|---|---|---|---|---|---|
| Date(s) | | April 12, 2006 | | April 12, 2006 | | April 13, 2006 | | April 13, 2006 | |
| Liquid Temperature (˚C) | 20.0 | Target | Measured | Target | Measured | Target | Measured | Target | Measured |
| Dielectric Constant: ε | | 41.50 | 40.57 | 41.50 | 40.23 | 41.50 | 40.72 | 41.50 | 40.80 |
| Conductivity: σ | | 0.900 | 0.890 | 0.970 | 0.960 | 0.900 | 0.880 | 0.970 | 0.970 |

| | | 900 MHz Body | | 835 MHz Head | | 1900 MHz Head | | 835 MHz Head | |
|---|---|---|---|---|---|---|---|---|---|
| Date(s) | | April 13, 2006 | | April 26, 2006 | | April 26, 2006 | | April 27, 2006 | |
| Liquid Temperature (˚C) | 20.0 | Target | Measured | Target | Measured | Target | Measured | Target | Measured |
| Dielectric Constant: ε | | 55.00 | 53.78 | 41.50 | 41.01 | 40.00 | 39.15 | 41.50 | 42.24 |
| Conductivity: σ | | 1.050 | 1.020 | 0.900 | 0.93 | 1.400 | 1.43 | 0.900 | 0.91 |

| | | 835 MHz Body | | 1900 MHz Head | | 835 MHz Head | | 1900 MHz Body | |
|---|---|---|---|---|---|---|---|---|---|
| Date(s) | | April 27, 2006 | | April 27, 2006 | | April 28, 2006 | | April 28, 2006 | |
| Liquid Temperature (˚C) | 20.0 | Target | Measured | Target | Measured | Target | Measured | Target | Measured |
| Dielectric Constant: ε | | 55.20 | 54.51 | 40.00 | 40.25 | 41.50 | 40.92 | 53.30 | 52.71 |
| Conductivity: σ | | 0.970 | 0.97 | 1.400 | 1.42 | 0.900 | 0.92 | 1.520 | 1.49 |

See Appendix A for data printout.

© 2005 RF Exposure Lab, LLC

*This report shall not be reproduced except in full without the written approval of RF Exposure Lab, LLC.*

## Test System Verification

Prior to assessment, the system is verified to the ±10% of the specifications at 835 MHz and 1900 MHz by using the system kit. Power is extrapolated to 1 watt. (Graphic Plots Attached)

**Table 10.2 System Dipole Validation Target & Measured**

| System Validation Kit ALS-D-835-S-2 S/N: RFE-274 | 835 MHz Brain | Targeted $SAR_{1g}$ (W/kg) | Measure $SAR_{1g}$ (W/kg) | Deviation (%) |
|---|---|---|---|---|
| 12-Apr-2006 | | 9.5 | 10.192 | + 7.28 |
| 13-Apr-2006 | | 9.5 | 9.208 | - 3.07 |
| 26-Apr-2006 | | 9.5 | 10.024 | +5.52 |
| 27-Apr-2006 | | 9.5 | 9.033 | - 4.92 |
| 28-Apr-2006 | | 9.5 | 9.552 | + 0.55 |

| System Validation Kit ALS-D-1900-S-2 S/N: RFE-277 | 1900 MHz Brain | Targeted $SAR_{1g}$ (W/kg) | Measure $SAR_{1g}$ (W/kg) | Deviation (%) |
|---|---|---|---|---|
| 26-Apr-2006 | | 39.7 | 40.84 | + 2.87 |
| 27-Apr-2006 | | 39.7 | 39.22 | - 1.21 |
| 28-Apr-2006 | | 39.7 | 41.32 | + 4.08 |

See Appendix A for data plots.

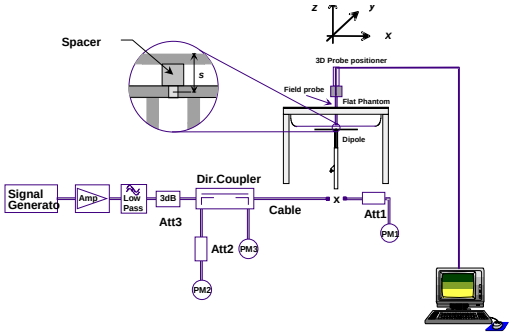


**Figure 10.1 Dipole Validation Test Setup**


*This report shall not be reproduced except in full without the written approval of RF Exposure Lab, LLC.*

# 11. SAR Test Data Summary

## See Measurement Result Data Pages

See Appendix B for SAR Test Data Plots.
See Appendix C for SAR Test Setup Photos.

## Procedures Used To Establish Test Signal

The device was placed into simulated transmit mode using the manufacturer's test codes. Such test signals offer a consistent means for testing SAR and are recommended for evaluating SAR. When test modes are not available or inappropriate for testing a device, the actual transmission is activated through a base station simulator or similar equipment. See data pages for actual procedure used in measurement.

## Device Test Condition

The device is battery operated. Each SAR measurement was taken with a fully charged battery. In order to verify that the device was tested at full power, conducted output power measurements were performed before and after each SAR measurement to confirm the output power unless otherwise noted. If a conducted power deviation of more than 5% occurred, the test was repeated.

The unit was required to be disassembled to measure the conducted power. To insure that the integrity of the device was not compromised, the power measurements were conducted at the completion of all testing.


*This report shall not be reproduced except in full without the written approval of RF Exposure Lab, LLC.*

## SAR Data Summary – 900 MHz Head

| MEASUREMENT RESULTS | | | | | | | | | |
|---|---|---|---|---|---|---|---|---|---|
| **Head** | **EUT Position** | **Antenna Position** | **Frequency** | | **Modulation** | **Begin / End Power** | | | **SAR (W/kg)** |
| | | | **MHz** | **Ch.** | | **(dBm)** | | **Battery** | |
| Right | Touch | Internal | 902 | 0 | OFDM | | 14.98 | Standard | 0.021 |
| | | | 915 | 15 | OFDM | | 15.05 | Standard | 0.021 |
| | | | 928 | 31 | OFDM | | 15.02 | Standard | 0.026 |
| | Tilt | | 902 | 0 | OFDM | | 14.98 | Standard | 0.020 |
| | | | 915 | 15 | OFDM | | 15.05 | Standard | 0.019 |
| | | | 928 | 31 | OFDM | | 15.02 | Standard | 0.019 |
| | Touch w/BT | | 928 | 31 | OFDM | | 15.02 | Standard | 0.020 |
| Left | Touch | | 902 | 0 | OFDM | | 14.98 | Standard | 0.036 |
| | | | 915 | 15 | OFDM | | 15.05 | Standard | 0.029 |
| | | | 928 | 31 | OFDM | | 15.02 | Standard | 0.029 |
| | Tilt | | 902 | 0 | OFDM | | 14.98 | Standard | 0.044 |
| | | | 915 | 15 | OFDM | | 15.05 | Standard | 0.031 |
| | | | 928 | 31 | OFDM | | 15.02 | Standard | 0.033 |
| | Tilt w/BT | | 902 | 0 | OFDM | | 14.98 | Standard | 0.024 |
| | | | | | | **Head**<br>**1.6 W/kg (mW/g)**<br>averaged over 1 gram | | | |

1. Battery is fully charged for all tests.
   Power Measured ☒Conducted ☐ERP ☐EIRP

2. SAR Measurement
   Phantom Configuration ☒Left Head ☐Uniphantom ☒Right Head
   SAR Configuration ☒Head ☐Body

3. Test Signal Call Mode ☒Test Code ☐Base Station Simulator

4. Test Configuration ☐With Belt Clip ☐Without Belt Clip ☒N/A

Jay M. Moulton
Vice President

© 2005 RF Exposure Lab, LLC

*This report shall not be reproduced except in full without the written approval of RF Exposure Lab, LLC.*

## SAR Data Summary – 900 MHz Body

| MEASUREMENT RESULTS | | | | | | | | |
|---|---|---|---|---|---|---|---|---|
| EUT Position | Antenna Position | Frequency | | Modulation | Begin / End Power | | | SAR (W/kg) |
| | | MHz | Ch. | | (dBm) | | Battery | |
| Touch | Internal | 902 | 0 | OFDM | | 14.98 | Standard | 0.027 |
| | | 915 | 15 | OFDM | | 15.05 | Standard | 0.029 |
| | | 928 | 31 | OFDM | | 15.02 | Standard | 0.038 |
| Touch w/BT | | 928 | 31 | OFDM | | 15.02 | Standard | 0.028 |
| | | | | | Head<br>1.6 W/kg (mW/g)<br>averaged over 1 gram | | | |

5. Battery is fully charged for all tests.
   Power Measured ☒Conducted ☐ERP ☐EIRP

6. SAR Measurement
   Phantom Configuration ☐Left Head ☐Uniphantom ☐Right Head
   SAR Configuration ☐Head ☒Body

7. Test Signal Call Mode ☒Test Code ☐Base Station Simulator

8. Test Configuration ☐With Belt Clip ☐Without Belt Clip ☒N/A

Jay M. Moulton
Vice President


*This report shall not be reproduced except in full without the written approval of RF Exposure Lab, LLC.*

## SAR Data Summary – 835 MHz Head (CDMA)

| MEASUREMENT RESULTS | | | | | | | | | |
|---|---|---|---|---|---|---|---|---|---|
| Head | EUT Position | Antenna Position | Frequency | | Modulation | Begin / End Power | | | SAR (W/kg) |
| | | | MHz | Ch. | | (dBm) | | Battery | |
| Right | Touch | Stubby | 824.70 | 1013 | CDMA | | 25.22 | Standard | 0.960 |
| | | | 836.52 | 384 | CDMA | | 25.35 | Standard | 0.793 |
| | | | 848.31 | 777 | CDMA | | 25.00 | Standard | 0.799 |
| | Tilt | | 824.70 | 1013 | CDMA | | 25.22 | Standard | 0.927 |
| | | | 836.52 | 384 | CDMA | | 25.35 | Standard | 0.776 |
| | | | 848.31 | 777 | CDMA | | 25.00 | Standard | 0.593 |
| Left | Touch | | 824.70 | 1013 | CDMA | | 25.22 | Standard | 0.966 |
| | | | 836.52 | 384 | CDMA | | 25.35 | Standard | 0.745 |
| | | | 848.31 | 777 | CDMA | | 25.00 | Standard | 0.905 |
| | Tilt | | 824.70 | 1013 | CDMA | | 25.22 | Standard | 0.489 |
| | | | | | | Head 1.6 W/kg (mW/g) averaged over 1 gram | | | |

9. Battery is fully charged for all tests.
   Power Measured ☒Conducted ☐ERP ☐EIRP

10. SAR Measurement
    Phantom Configuration ☒Left Head ☐Uniphantom ☒Right Head
    SAR Configuration ☒Head ☐Body

11. Test Signal Call Mode ☐Test Code ☒Base Station Simulator

12. Test Configuration ☐With Belt Clip ☐Without Belt Clip ☒N/A

Jay M. Moulton
Vice President


*This report shall not be reproduced except in full without the written approval of RF Exposure Lab, LLC.*

## SAR Data Summary – 835 MHz Body (CDMA)

| MEASUREMENT RESULTS | | | | | | | | |
|---|---|---|---|---|---|---|---|---|
| EUT Position | Antenna Position | Frequency | | Modulation | Begin / End Power | | | SAR (W/kg) |
| | | MHz | Ch. | | (dBm) | | Battery | |
| Touch | Stubby | 824.70 | 1013 | CDMA | | 25.22 | Standard | 0.903 |
| | | 836.52 | 384 | CDMA | | 25.35 | Standard | 0.760 |
| | | 848.31 | 777 | CDMA | | 25.00 | Standard | 0.508 |
| | | | | | Head 1.6 W/kg (mW/g) averaged over 1 gram | | | |

13. Battery is fully charged for all tests.
    Power Measured ☒Conducted ☐ERP ☐EIRP

14. SAR Measurement
    Phantom Configuration ☐Left Head ☐Uniphantom ☐Right Head
    SAR Configuration ☐Head ☒Body

15. Test Signal Call Mode ☐Test Code ☒Base Station Simulator

16. Test Configuration ☐With Belt Clip ☐Without Belt Clip ☒N/A

Jay M. Moulton
Vice President


*This report shall not be reproduced except in full without the written approval of RF Exposure Lab, LLC.*

## SAR Data Summary – 1900 MHz Head (PCS)

| MEASUREMENT RESULTS | | | | | | | | | |
|---|---|---|---|---|---|---|---|---|---|
| **Head** | **EUT Position** | **Antenna Position** | **Frequency** | | **Modulation** | **Begin / End Power** | | | **SAR (W/kg)** |
| | | | **MHz** | **Ch.** | | **(dBm)** | | **Battery** | |
| Right | Touch | Stubby | 1851.25 | 25 | CDMA | | 24.02 | Standard | 0.766 |
| | | | 1880.00 | 600 | CDMA | | 24.27 | Standard | 0.780 |
| | | | 1908.75 | 1175 | CDMA | | 24.42 | Standard | 0.700 |
| | Tilt | | 1851.25 | 25 | CDMA | | 24.02 | Standard | 1.219 |
| | | | 1880.00 | 600 | CDMA | | 24.27 | Standard | 1.361 |
| | | | 1908.75 | 1175 | CDMA | | 24.42 | Standard | 1.210 |
| Left | Touch | | 1851.25 | 25 | CDMA | | 24.02 | Standard | 0.673 |
| | | | 1880.00 | 600 | CDMA | | 24.27 | Standard | 0.577 |
| | Tilt | | 1851.25 | 25 | CDMA | | 24.02 | Standard | 0.921 |
| | | | 1880.00 | 600 | CDMA | | 24.27 | Standard | 0.918 |
| | | | 1908.75 | 1175 | CDMA | | 24.42 | Standard | 0.786 |
| | | | | | | **Head 1.6 W/kg (mW/g)** averaged over 1 gram | | | |

17. Battery is fully charged for all tests.
    Power Measured ☒Conducted ☐ERP ☐EIRP

18. SAR Measurement
    Phantom Configuration ☒Left Head ☐Uniphantom ☒Right Head
    SAR Configuration ☒Head ☐Body

19. Test Signal Call Mode ☒Test Code ☐Base Station Simulator

20. Test Configuration ☐With Belt Clip ☐Without Belt Clip ☒N/A

Jay M. Moulton
Vice President


*This report shall not be reproduced except in full without the written approval of RF Exposure Lab, LLC.*

## SAR Data Summary – 1900 MHz Body (PCS)

| MEASUREMENT RESULTS | | | | | | | | |
|---|---|---|---|---|---|---|---|---|
| EUT Position | Antenna Position | Frequency | | Modulation | Begin / End Power | | | SAR (W/kg) |
| | | MHz | Ch. | | (dBm) | | Battery | |
| Touch | Stubby | 1851.25 | 25 | CDMA | | 24.02 | Standard | 1.166 |
| | | 1880.00 | 600 | CDMA | | 24.27 | Standard | 1.134 |
| | | 1908.75 | 1175 | CDMA | | 24.42 | Standard | 1.230 |
| | | | | | **Head 1.6 W/kg (mW/g)** averaged over 1 gram | | | |

21. Battery is fully charged for all tests.
    Power Measured ☒Conducted ☐ERP ☐EIRP

22. SAR Measurement
    Phantom Configuration ☐Left Head ☐Uniphantom ☐Right Head
    SAR Configuration ☐Head ☒Body

23. Test Signal Call Mode ☐Test Code ☒Base Station Simulator

24. Test Configuration ☐With Belt Clip ☐Without Belt Clip ☒N/A

Jay M. Moulton
Vice President


*This report shall not be reproduced except in full without the written approval of RF Exposure Lab, LLC.*

# 12. Test Equipment List

**Table 12.1 Equipment Specifications**

| Type | Calibration Due Date | Serial Number |
|---|---|---|
| ThermoCRS Robot | N/A | RAF0338198 |
| ThermoCRS Controller | N/A | RCF0338224 |
| ThermoCRS Teach Pendant (Joystick) | N/A | STP0334405 |
| IBM Computer, 2.66 MHz P4 | N/A | 8189D8U KCPR08N |
| Aprel E-Field Probe ALS-E020 | 06/10/2006 | RFE-215 |
| Aprel Dummy Probe | N/A | 023 |
| Aprel Left Phantom | N/A | RFE-267 |
| Aprel Right Phantom | N/A | RFE-268 |
| Aprel UniPhantom | N/A | RFE-273 |
| Aprel Validation Dipole ALS-D-450-S-2 | 01/12/2007 | RFE-362 |
| Aprel Validation Dipole ALS-D-835-S-2 | 02/16/2008 | RFE-274 |
| Aprel Validation Dipole ALS-D-1900-S-2 | 02/15/2008 | RFE-277 |
| Aprel Validation Dipole ALS-D-2450-S-2 | 02/17/2008 | RFE-278 |
| Aprel Validation Dipole ALS-D-BB-S-2 | 05/24/2007 | 5258-235-00801 |
| Agilent (HP) 437B Power Meter | 12/12/2006 | 3125U08837 |
| Agilent (HP) 8481B Power Sensor | 12/19/2006 | 3318A05384 |
| Advantest R3261A Spectrum Analyzer | 12/13/2006 | 31720068 |
| Agilent (HP) 8350B Signal Generator | 02/23/2007 | 2749A10226 |
| Agilent (HP) 83525A RF Plug-In | 02/23/2007 | 2647A01172 |
| Agilent (HP) 8753C Vector Network Analyzer | 02/02/2007 | 3135A01724 |
| Agilent (HP) 85047A S-Parameter Test Set | 02/02/2007 | 2904A00595 |
| Aprel Dielectric Probe Assembly | N/A | 0011 |
| Microwave Power Devices 510-10E Amplifier | 02/23/2007 | 6063-001 |
| Microwave Power Devices 1020-9E Amplifier | 02/23/2007 | 5618-1 |
| Brain Equivalent Matter (450 MHz) | N/A | N/A |
| Brain Equivalent Matter (835 MHz) | N/A | N/A |
| Brain Equivalent Matter (1900 MHz) | N/A | N/A |
| Brain Equivalent Matter (2450 MHz) | N/A | N/A |
| Muscle Equivalent Matter (450 MHz) | N/A | N/A |
| Muscle Equivalent Matter (835 MHz) | N/A | N/A |
| Muscle Equivalent Matter (1900 MHz) | N/A | N/A |
| Muscle Equivalent Matter (2450 MHz) | N/A | N/A |
| Muscle Equivalent Matter (5200 MHz) | N/A | N/A |
| Muscle Equivalent Matter (5800 MHz) | N/A | N/A |

© 2005 RF Exposure Lab, LLC

*This report shall not be reproduced except in full without the written approval of RF Exposure Lab, LLC.*

# 13. Conclusion

The SAR measurement indicates that the EUT complies with the RF radiation exposure limits of the FCC. These measurements are taken to simulate the RF effects exposure under worst-case conditions. Precise laboratory measures were taken to assure repeatability of the tests. The tested device complies with the requirements in respect to all parameters subject to the test. The test results and statements relate only to the item(s) tested.

Please note that the absorption and distribution of electromagnetic energy in the body is a very complex phenomena that depends on the mass, shape, and size of the body; the orientation of the body with respect to the field vectors; and, the electrical properties of both the body and the environment. Other variables that may play a substantial role in possible biological effects are those that characterize the environment (e.g. ambient temperature, air velocity, relative humidity, and body insulation) and those that characterize the individual (e.g. age, gender, activity level, debilitation, or disease). Because innumerable factors may interact to determine the specific biological outcome of an exposure to electromagnetic fields, any protection guide shall consider maximal amplification of biological effects as a result of field-body interactions, environmental conditions, and physiological variables. [3]


*This report shall not be reproduced except in full without the written approval of RF Exposure Lab, LLC.*

# 14. References

[1] Federal Communications Commission, ET Docket 93-62, Guidelines for Evaluating the Environmental Effects of Radio Frequency Radiation, August 1996

[2] ANSI/IEEE C95.1 – 1999, American National Standard Safety Levels with respect to Human Exposure to Radio Frequency Electromagnetic Fields, 300kHz to 100GHz, New York: IEEE, 1992.

[3] ANSI/IEEE C95.3 – 2002, IEEE Recommended Practice for the Measurement of Potentially Hazardous Electromagnetic Fields – RF and Microwave, New York: IEEE, 1992.

[4] Federal Communications Commission, OET Bulletin 65 (Edition 97-01), Supplement C (Edition 01-01), Evaluating Compliance with FCC Guidelines for Human Exposure to Radio Frequency Electromagnetic Fields, July 2001.

[5] IEEE Standard 1528 – 2003, IEEE Recommended Practice for Determining the Peak-Spatial Average Specific Absorption Rate (SAR) in the Human Head from Wireless Communication Devices: Measurement Techniques, October 2003.

[6] Industry Canada, RSS – 102e, Radio Frequency Exposure Compliance of Radiocommunication Apparatus (All Frequency Bands), November 2005.

[7] Industry Canada, Safety Code 6, Limits of Human Exposure to Radiofrequency Electromagnetic Fields in the Frequency Range from 3kHz to 300 GHz, 1999.


*This report shall not be reproduced except in full without the written approval of RF Exposure Lab, LLC.*

# Appendix A – System Validation Plots and Data

```
************************************************************
Test Result for UIM Dielectric Parameter
Wed 12/Apr/2006 07:18:46
Freq  Frequency(GHz)
FCC_eH      FCC OET 65 Supplement C (June 2001) Limits for Head Epsilon
FCC_sH      FCC OET 65 Supplement C (June 2001) Limits for Head Sigma
Test_e      Epsilon  of  UIM
Test_s      Sigma of UIM
************************************************************
```

| Freq | FCC_eH | FCC_sH | Test_e | Test_s |
|---|---|---|---|---|
| 0.8050 | 41.66 | 0.90 | 40.97 | 0.87 |
| 0.8150 | 41.60 | 0.90 | 40.78 | 0.87 |
| 0.8250 | 41.55 | 0.90 | 40.60 | 0.89 |
| 0.8350 | 41.50 | 0.90 | 40.57 | 0.89 |
| 0.8450 | 41.50 | 0.91 | 40.41 | 0.91 |
| 0.8550 | 41.50 | 0.92 | 40.21 | 0.91 |
| 0.8650 | 41.50 | 0.93 | 40.22 | 0.92 |

```
************************************************************
Test Result for UIM Dielectric Parameter
Wed 12/Apr/2006 07:35:39
Freq  Frequency(GHz)
FCC_eH      FCC OET 65 Supplement C (June 2001) Limits for Head Epsilon
FCC_sH      FCC OET 65 Supplement C (June 2001) Limits for Head Sigma
Test_e      Epsilon  of  UIM
Test_s      Sigma of UIM
************************************************************
```

| Freq | FCC_eH | FCC_sH | Test_e | Test_s |
|---|---|---|---|---|
| 0.8700 | 41.50 | 0.94 | 40.39 | 0.93 |
| 0.8800 | 41.50 | 0.95 | 40.29 | 0.95 |
| 0.8900 | 41.50 | 0.96 | 40.27 | 0.95 |
| 0.9000 | 41.50 | 0.97 | 40.23 | 0.96 |
| 0.9100 | 41.50 | 0.98 | 40.21 | 0.98 |
| 0.9200 | 41.49 | 0.98 | 40.17 | 0.99 |
| 0.9300 | 41.47 | 0.99 | 40.12 | 1.00 |

© 2005 RF Exposure Lab, LLC

*This report shall not be reproduced except in full without the written approval of RF Exposure Lab, LLC.*

**********
Test Result for UIM Dielectric Parameter
Thu 13/Apr/2006 07:10:46
Freq  Frequency(GHz)
FCC_eH  FCC OET 65 Supplement C (June 2001) Limits for Head Epsilon
FCC_sH  FCC OET 65 Supplement C (June 2001) Limits for Head Sigma
Test_e  Epsilon  of  UIM
Test_s  Sigma of UIM
**********

| Freq | FCC_eH | FCC_sH | Test_e | Test_s |
|---|---|---|---|---|
| 0.8050 | 41.66 | 0.90 | 40.87 | 0.85 |
| 0.8150 | 41.60 | 0.90 | 40.79 | 0.86 |
| 0.8250 | 41.55 | 0.90 | 40.74 | 0.87 |
| 0.8350 | 41.50 | 0.90 | 40.72 | 0.88 |
| 0.8450 | 41.50 | 0.91 | 40.61 | 0.90 |
| 0.8550 | 41.50 | 0.92 | 40.57 | 0.91 |
| 0.8650 | 41.50 | 0.93 | 40.52 | 0.92 |

**********
Test Result for UIM Dielectric Parameter
Thu 13/Apr/2006 07:15:21
Freq  Frequency(GHz)
FCC_eH  FCC OET 65 Supplement C (June 2001) Limits for Head Epsilon
FCC_sH  FCC OET 65 Supplement C (June 2001) Limits for Head Sigma
Test_e  Epsilon  of  UIM
Test_s  Sigma of UIM
**********

| Freq | FCC_eH | FCC_sH | Test_e | Test_s |
|---|---|---|---|---|
| 0.8700 | 41.50 | 0.94 | 40.98 | 0.93 |
| 0.8800 | 41.50 | 0.95 | 40.93 | 0.94 |
| 0.8900 | 41.50 | 0.96 | 40.82 | 0.95 |
| 0.9000 | 41.50 | 0.97 | 40.80 | 0.97 |
| 0.9100 | 41.50 | 0.98 | 40.77 | 0.98 |
| 0.9200 | 41.49 | 0.98 | 40.74 | 0.99 |
| 0.9300 | 41.47 | 0.99 | 40.61 | 1.00 |

© 2005 RF Exposure Lab, LLC

*This report shall not be reproduced except in full without the written approval of RF Exposure Lab, LLC.*

**********
Test Result for UIM Dielectric Parameter
Thu 13/Apr/2006 14:01:01
Freq  Frequency(GHz)
FCC_eH  FCC Bulletin 65 Supplement C ( June 2001) Limits for Head Epsilon
FCC_sH  FCC Bulletin 65 Supplement C (June 2001) Limits for Head Sigma
FCC_eB  FCC Limits for Body Epsilon
FCC_sB  FCC Limits for Body Sigma
Test_e  Epsilon of UIM
Test_s  Sigma of UIM
**********

| Freq | FCC_eB | FCC_sB | Test_e | Test_s |
|---|---|---|---|---|
| 0.8700 | 55.09 | 1.01 | 53.84 | 0.98 |
| 0.8800 | 55.06 | 1.03 | 53.81 | 0.99 |
| 0.8900 | 55.03 | 1.04 | 53.73 | 1.01 |
| 0.9000 | 55.00 | 1.05 | 53.78 | 1.02 |
| 0.9100 | 55.00 | 1.06 | 53.50 | 1.04 |
| 0.9200 | 54.99 | 1.06 | 53.37 | 1.05 |
| 0.9300 | 54.97 | 1.07 | 53.18 | 1.06 |

**********
Test Result for UIM Dielectric Parameter
Wed 26/Apr/2006 07:07:41
Freq  Frequency(GHz)
FCC_eH  FCC OET 65 Supplement C (June 2001) Limits for Head Epsilon
FCC_sH  FCC OET 65 Supplement C (June 2001) Limits for Head Sigma
Test_e  Epsilon of UIM
Test_s  Sigma of UIM
**********

| Freq | FCC_eH | FCC_sH | Test_e | Test_s |
|---|---|---|---|---|
| 0.8050 | 41.66 | 0.90 | 41.12 | 0.90 |
| 0.8150 | 41.60 | 0.90 | 41.09 | 0.90 |
| 0.8250 | 41.55 | 0.90 | 41.04 | 0.92 |
| 0.8350 | 41.50 | 0.90 | 41.01 | 0.93 |
| 0.8450 | 41.50 | 0.91 | 41.00 | 0.94 |
| 0.8550 | 41.50 | 0.92 | 40.99 | 0.95 |
| 0.8650 | 41.50 | 0.93 | 40.98 | 0.96 |

© 2005 RF Exposure Lab, LLC

*This report shall not be reproduced except in full without the written approval of RF Exposure Lab, LLC.*

```
************************************************************
Test Result for UIM Dielectric Parameter
Wed 26/Apr/2006 7:18:02
Freq  Frequency(GHz)
FCC_eH      FCC OET 65 Supplement C (June 2001) Limits for Head Epsilon
FCC_sH      FCC OET 65 Supplement C (June 2001) Limits for Head Sigma
Test_e      Epsilon  of  UIM
Test_s      Sigma of UIM
************************************************************
```

| Freq | FCC_eH | FCC_sH | Test_e | Test_s |
|---|---|---|---|---|
| 1.8700 | 40.00 | 1.40 | 39.18 | 1.42 |
| 1.8800 | 40.00 | 1.40 | 39.17 | 1.42 |
| 1.8900 | 40.00 | 1.40 | 39.15 | 1.43 |
| 1.9000 | 40.00 | 1.40 | 39.15 | 1.43 |
| 1.9100 | 40.00 | 1.40 | 39.14 | 1.44 |
| 1.9200 | 40.00 | 1.40 | 39.13 | 1.45 |
| 1.9300 | 40.00 | 1.40 | 39.11 | 1.45 |

```
************************************************************
Test Result for UIM Dielectric Parameter
Thu 27/Apr/2006 07:00:21
Freq  Frequency(GHz)
FCC_eH      FCC OET 65 Supplement C (June 2001) Limits for Head Epsilon
FCC_sH      FCC OET 65 Supplement C (June 2001) Limits for Head Sigma
Test_e      Epsilon  of  UIM
Test_s      Sigma of UIM
************************************************************
```

| Freq | FCC_eH | FCC_sH | Test_e | Test_s |
|---|---|---|---|---|
| 0.8050 | 41.66 | 0.90 | 42.29 | 0.88 |
| 0.8150 | 41.60 | 0.90 | 42.28 | 0.89 |
| 0.8250 | 41.55 | 0.90 | 42.26 | 0.90 |
| 0.8350 | 41.50 | 0.90 | 42.24 | 0.91 |
| 0.8450 | 41.50 | 0.91 | 42.22 | 0.92 |
| 0.8550 | 41.50 | 0.92 | 42.21 | 0.94 |
| 0.8650 | 41.50 | 0.93 | 42.20 | 0.95 |

© 2005 RF Exposure Lab, LLC

*This report shall not be reproduced except in full without the written approval of RF Exposure Lab, LLC.*

**********
Test Result for UIM Dielectric Parameter
Thu 27/Apr/2006 07:10:46
Freq Frequency(GHz)
FCC_eH FCC Bulletin 65 Supplement C ( June 2001) Limits for Head Epsilon
FCC_sH FCC Bulletin 65 Supplement C (June 2001) Limits for Head Sigma
FCC_eB FCC Limits for Body Epsilon
FCC_sB FCC Limits for Body Sigma
Test_e Epsilon of UIM
Test_s Sigma of UIM
**********

| Freq | FCC_eB | FCC_sB | Test_e | Test_s |
|---|---|---|---|---|
| 0.8050 | 55.32 | 0.97 | 54.85 | 0.96 |
| 0.8150 | 55.28 | 0.97 | 54.71 | 0.96 |
| 0.8250 | 55.24 | 0.97 | 54.58 | 0.97 |
| 0.8350 | 55.20 | 0.97 | 54.51 | 0.97 |
| 0.8450 | 55.17 | 0.98 | 54.40 | 0.98 |
| 0.8550 | 55.14 | 0.99 | 54.42 | 0.98 |
| 0.8650 | 55.11 | 1.01 | 54.30 | 0.99 |

**********
Test Result for UIM Dielectric Parameter
Thu 27/Apr/2006 07:19:05
Freq Frequency(GHz)
FCC_eH FCC OET 65 Supplement C (June 2001) Limits for Head Epsilon
FCC_sH FCC OET 65 Supplement C (June 2001) Limits for Head Sigma
Test_e Epsilon of UIM
Test_s Sigma of UIM
**********

| Freq | FCC_eH | FCC_sH | Test_e | Test_s |
|---|---|---|---|---|
| 1.8700 | 40.00 | 1.40 | 40.29 | 1.41 |
| 1.8800 | 40.00 | 1.40 | 40.28 | 1.42 |
| 1.8900 | 40.00 | 1.40 | 40.26 | 1.42 |
| 1.9000 | 40.00 | 1.40 | 40.25 | 1.42 |
| 1.9100 | 40.00 | 1.40 | 40.23 | 1.43 |
| 1.9200 | 40.00 | 1.40 | 40.22 | 1.43 |
| 1.9300 | 40.00 | 1.40 | 40.21 | 1.44 |

© 2005 RF Exposure Lab, LLC

*This report shall not be reproduced except in full without the written approval of RF Exposure Lab, LLC.*

**********
Test Result for UIM Dielectric Parameter
Fri 28/Apr/2006 07:12:15
Freq Frequency(GHz)
FCC_eH FCC OET 65 Supplement C (June 2001) Limits for Head Epsilon
FCC_sH FCC OET 65 Supplement C (June 2001) Limits for Head Sigma
Test_e Epsilon of UIM
Test_s Sigma of UIM
**********

| Freq | FCC_eH | FCC_sH | Test_e | Test_s |
|---|---|---|---|---|
| 0.8050 | 41.66 | 0.90 | 40.97 | 0.90 |
| 0.8150 | 41.60 | 0.90 | 40.96 | 0.90 |
| 0.8250 | 41.55 | 0.90 | 40.94 | 0.91 |
| 0.8350 | 41.50 | 0.90 | 40.92 | 0.92 |
| 0.8450 | 41.50 | 0.91 | 40.90 | 0.93 |
| 0.8550 | 41.50 | 0.92 | 40.89 | 0.94 |
| 0.8650 | 41.50 | 0.93 | 40.88 | 0.95 |

**********
Test Result for UIM Dielectric Parameter
Fri 28/Apr/2006 07:24:57
Freq Frequency(GHz)
FCC_eH FCC Bulletin 65 Supplement C ( June 2001) Limits for Head Epsilon
FCC_sH FCC Bulletin 65 Supplement C (June 2001) Limits for Head Sigma
FCC_eB FCC Limits for Body Epsilon
FCC_sB FCC Limits for Body Sigma
Test_e Epsilon of UIM
Test_s Sigma of UIM
**********

| Freq | FCC_eB | FCC_sB | Test_e | Test_s |
|---|---|---|---|---|
| 1.8700 | 53.30 | 1.52 | 52.76 | 1.49 |
| 1.8800 | 53.30 | 1.52 | 52.75 | 1.49 |
| 1.8900 | 53.30 | 1.52 | 52.72 | 1.49 |
| 1.9000 | 53.30 | 1.52 | 52.71 | 1.49 |
| 1.9100 | 53.30 | 1.52 | 52.69 | 1.48 |
| 1.9200 | 53.30 | 1.52 | 51.67 | 1.48 |
| 1.9300 | 53.30 | 1.52 | 51.64 | 1.48 |

© 2005 RF Exposure Lab, LLC

*This report shall not be reproduced except in full without the written approval of RF Exposure Lab, LLC.*

# SAR Test Report

By Operator : Jay
Measurement Date : 12-Apr-2006
Starting Time : 12-Apr-2006 08:17:31 AM
End Time : 12-Apr-2006 08:32:48 AM
Scanning Time : 917 secs

Product Data
Device Name : Validation
Serial No. : 835
Type : Dipole
Model : ALS-D-835-S-2
Frequency : 835.00 MHz
Max. Transmit Pwr : 0.25 W
Drift Time : 0 min(s)
Length : 161 mm
Width : 3.6 mm
Depth : 89.8 mm
Antenna Type : Internal
Orientation : Touch
Power Drift-Start : 2.365 W/kg
Power Drift-Finish: 2.428 W/kg
Power Drift (%) : 2.618

Phantom Data
Name : APREL-Uni
Type : Uni-Phantom
Size (mm) : 280 x 280 x 200
Serial No. : System Default
Location : Center
Description : Uni-Phantom

Tissue Data
Type : HEAD
Serial No. : 835
Frequency : 835.00 MHz
Last Calib. Date : 12-Apr-2006
Temperature : 20.00 °C
Ambient Temp. : 22.00 °C
Humidity : 43.00 RH%
Epsilon : 40.57 F/m
Sigma : 0.89 S/m
Density : 1000.00 kg/cu. m

Probe Data
Name : Probe 215 - RFEL
Model : E020
Type : E-Field Triangle
Serial No. : 215
Last Calib. Date : 10-Jun-2005
Frequency : 835.00 MHz
Duty Cycle Factor: 1
Conversion Factor: 6.07
Probe Sensitivity: 1.20 1.20 1.20 $\mu V/(V/m)^2$
Compression Point: 95.00 mV
Offset : 1.56 mm

© 2005 RF Exposure Lab, LLC

*This report shall not be reproduced except in full without the written approval of RF Exposure Lab, LLC.*

```
Measurement Data
Crest Factor      : 1
Scan Type         : Complete
Tissue Temp.      : 21.00 °C
Ambient Temp.     : 22.00 °C
Set-up Date       : 12-Apr-2006
Set-up Time       : 07:08:46 AM
Area Scan         : 6x6x1 : Measurement x=10mm, y=10mm, z=4mm
Zoom Scan         : 5x5x8 : Measurement x=8mm, y=8mm, z=4mm

Other Data
DUT Position      : Touch
Separation        : 15 mm
Channel           : Mid - 835
```

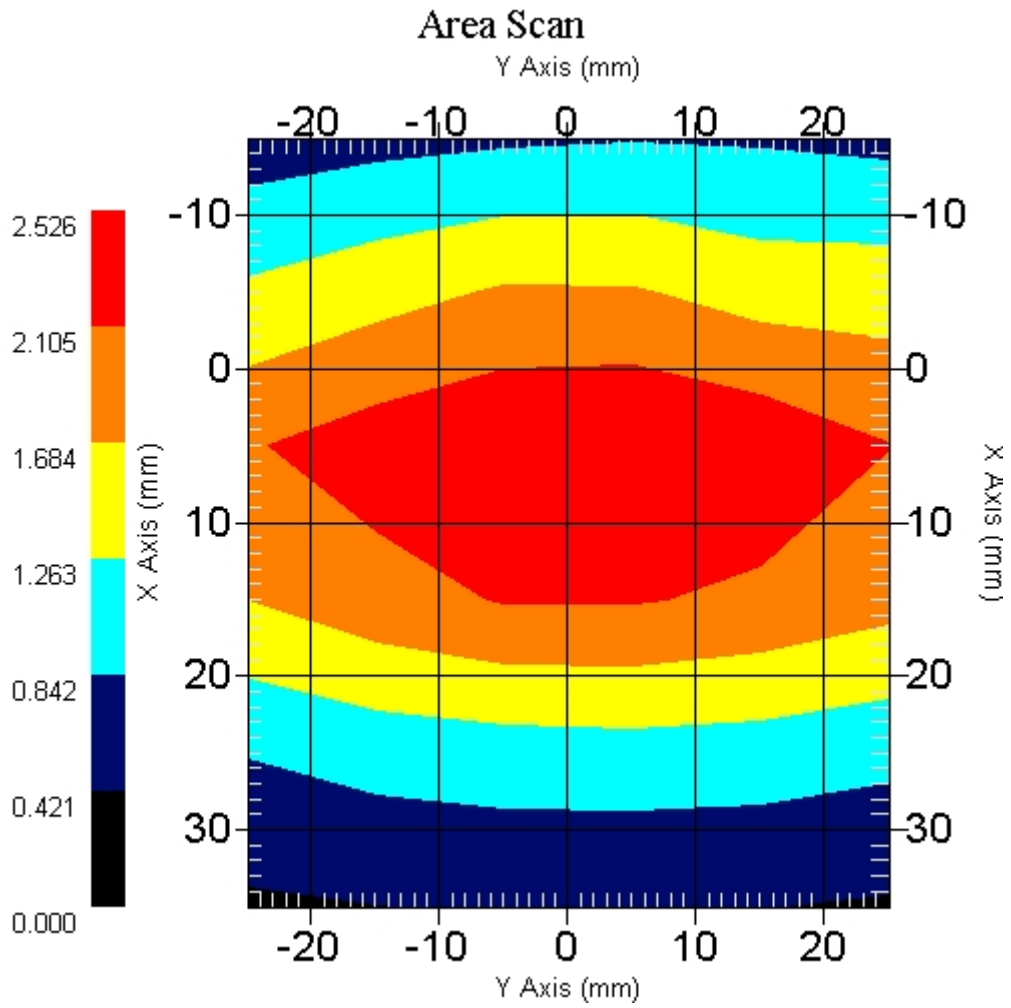


```
1 gram SAR value    : 2.548 W/kg
10 gram SAR value   : 1.652 W/kg
Area Scan Peak SAR  : 2.525 W/kg
Zoom Scan Peak SAR  : 3.783 W/kg
```


*This report shall not be reproduced except in full without the written approval of RF Exposure Lab, LLC.*

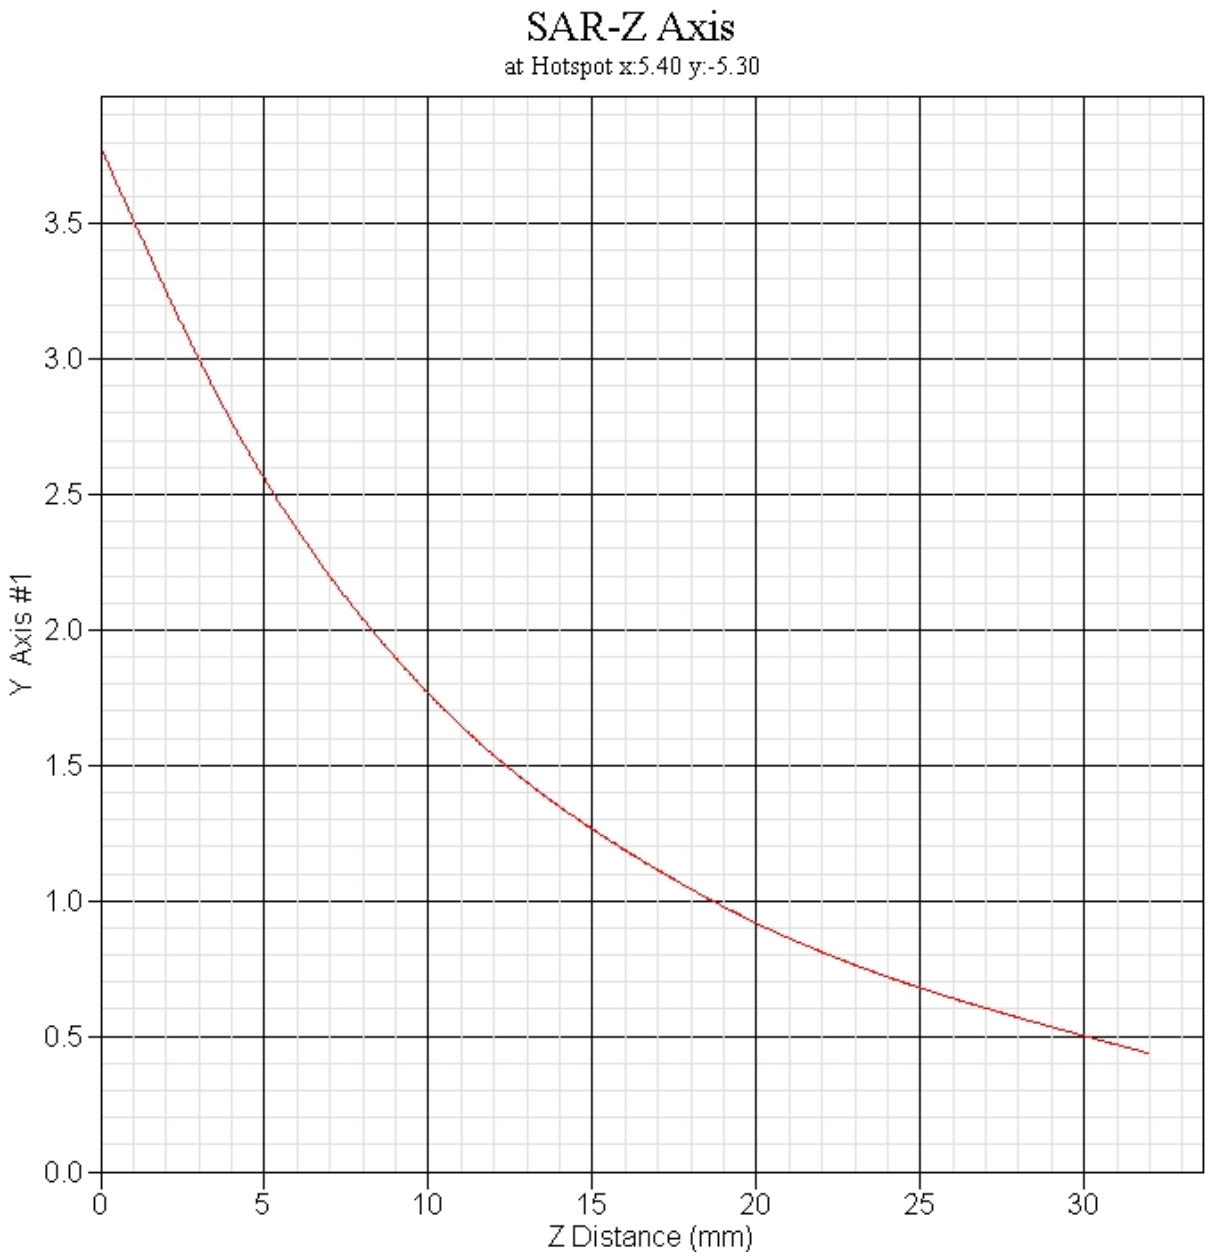



*This report shall not be reproduced except in full without the written approval of RF Exposure Lab, LLC.*

# SAR Test Report

By Operator : Jay
Measurement Date : 13-Apr-2006
Starting Time : 13-Apr-2006 08:05:25 AM
End Time : 13-Apr-2006 08:20:45 AM
Scanning Time : 920 secs

Product Data
Device Name : Validation
Serial No. : 835
Type : Dipole
Model : ALS-D-835-S-2
Frequency : 835.00 MHz
Max. Transmit Pwr : 0.25 W
Drift Time : 0 min(s)
Length : 161 mm
Width : 3.6 mm
Depth : 89.8 mm
Antenna Type : Internal
Orientation : Touch
Power Drift-Start : 2.099 W/kg
Power Drift-Finish: 2.200 W/kg
Power Drift (%) : 4.832

Phantom Data
Name : APREL-Uni
Type : Uni-Phantom
Size (mm) : 280 x 280 x 200
Serial No. : System Default
Location : Center
Description : Uni-Phantom

Tissue Data
Type : HEAD
Serial No. : 835
Frequency : 835.00 MHz
Last Calib. Date : 13-Apr-2006
Temperature : 20.00 °C
Ambient Temp. : 23.00 °C
Humidity : 42.00 RH%
Epsilon : 40.72 F/m
Sigma : 0.88 S/m
Density : 1000.00 kg/cu. m

Probe Data
Name : Probe 215 - RFEL
Model : E020
Type : E-Field Triangle
Serial No. : 215
Last Calib. Date : 10-Jun-2005
Frequency : 835.00 MHz
Duty Cycle Factor: 1
Conversion Factor: 6.07
Probe Sensitivity: 1.20 1.20 1.20 $\mu V/(V/m)^2$
Compression Point: 95.00 mV
Offset : 1.56 mm

© 2005 RF Exposure Lab, LLC

*This report shall not be reproduced except in full without the written approval of RF Exposure Lab, LLC.*

```
Measurement Data
Crest Factor      : 1
Scan Type         : Complete
Tissue Temp.      : 20.00 °C
Ambient Temp.     : 22.00 °C
Set-up Date       : 13-Apr-2006
Set-up Time       : 10:28:46 AM
Area Scan         : 6x6x1 : Measurement x=10mm, y=10mm, z=4mm
Zoom Scan         : 5x5x8 : Measurement x=8mm, y=8mm, z=4mm

Other Data
DUT Position      : Touch
Separation        : 15 mm
Channel           : Mid - 915
```

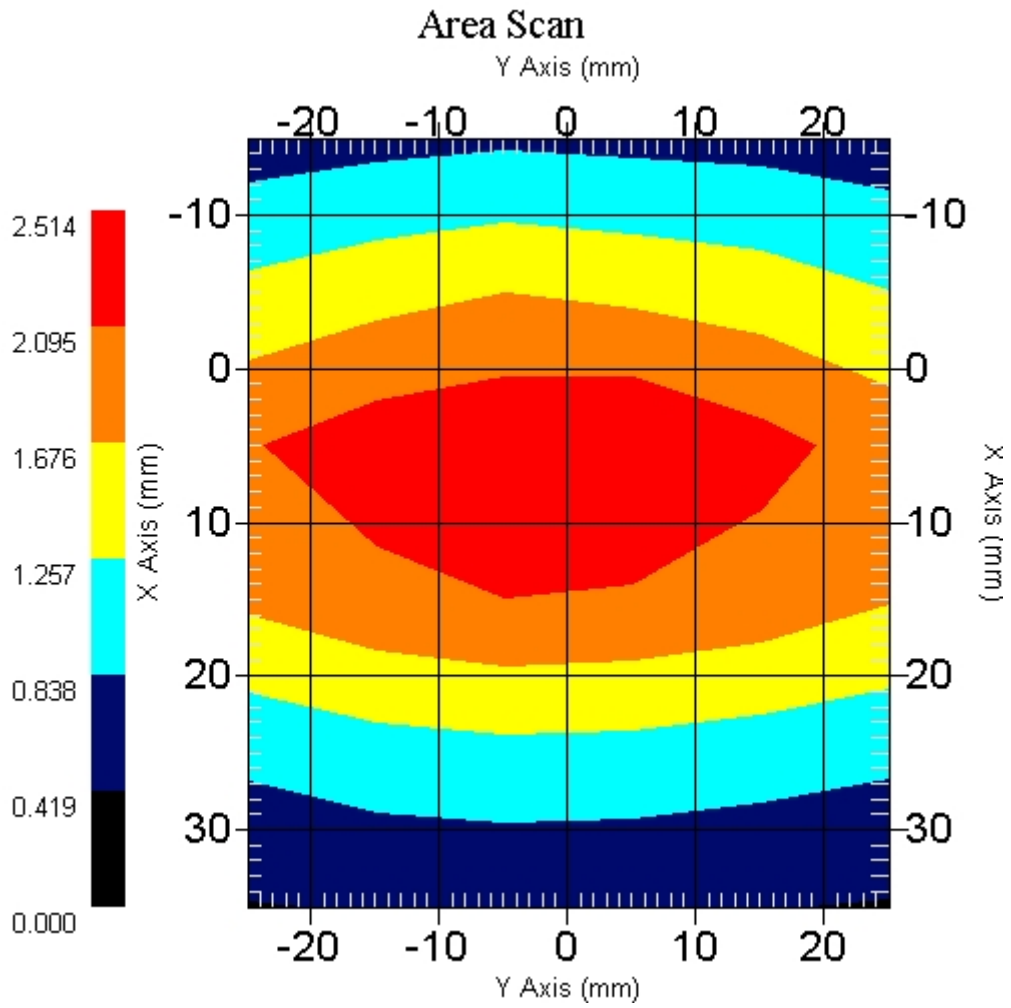


```
1 gram SAR value    : 2.302 W/kg
10 gram SAR value   : 1.507 W/kg
Area Scan Peak SAR  : 2.514 W/kg
Zoom Scan Peak SAR  : 3.383 W/kg
```


*This report shall not be reproduced except in full without the written approval of RF Exposure Lab, LLC.*

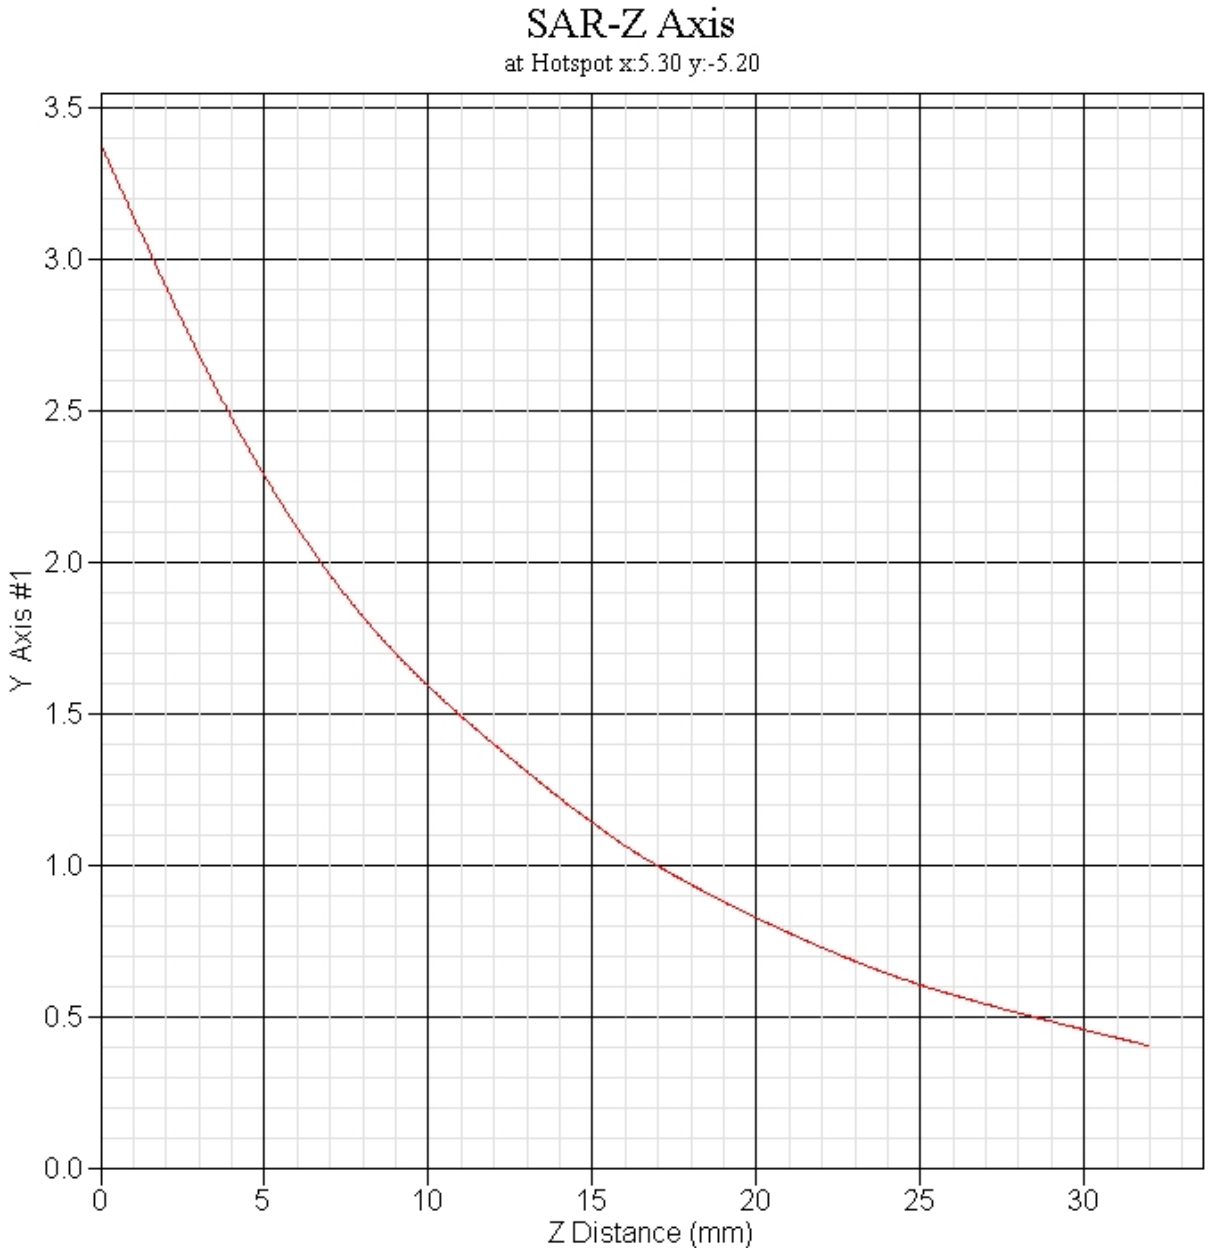



*This report shall not be reproduced except in full without the written approval of RF Exposure Lab, LLC.*

# SAR Test Report

By Operator : Jay
Measurement Date : 26-Apr-2006
Starting Time : 26-Apr-2006 07:13:07 AM
End Time : 26-Apr-2006 07:26:24 AM
Scanning Time : 797 secs

Product Data
Device Name : Validation
Serial No. : 835
Type : Dipole
Model : ALS-D-835-S-2
Frequency : 835.00 MHz
Max. Transmit Pwr : 0.25 W
Drift Time : 0 min(s)
Length : 161 mm
Width : 3.6 mm
Depth : 89.8 mm
Antenna Type : Internal
Orientation : 15 mm
Power Drift-Start : 2.233 W/kg
Power Drift-Finish: 2.224 W/kg
Power Drift (%) : -0.383

Phantom Data
Name : APREL-Uni
Type : Uni-Phantom
Size (mm) : 280 x 280 x 200
Serial No. : System Default
Location : Center
Description : Uni-Phantom

Tissue Data
Type : HEAD
Serial No. : 835
Frequency : 835.00 MHz
Last Calib. Date : 26-Apr-2006
Temperature : 20.00 °C
Ambient Temp. : 23.00 °C
Humidity : 42.00 RH%
Epsilon : 41.01 F/m
Sigma : 0.93 S/m
Density : 1000.00 kg/cu. m

Probe Data
Name : Probe 215 - RFEL
Model : E020
Type : E-Field Triangle
Serial No. : 215
Last Calib. Date : 10-Jun-2005
Frequency : 835.00 MHz
Duty Cycle Factor: 1
Conversion Factor: 6.07
Probe Sensitivity: 1.20 1.20 1.20 µV/(V/m)$^2$
Compression Point: 95.00 mV
Offset : 1.56 mm

© 2005 RF Exposure Lab, LLC

*This report shall not be reproduced except in full without the written approval of RF Exposure Lab, LLC.*

```
Measurement Data
Crest Factor      : 1
Scan Type         : Complete
Tissue Temp.      : 20.00 °C
Ambient Temp.     : 23.00 °C
Set-up Date       : 26-Apr-2006
Set-up Time       : 07:12:59 AM
Area Scan         : 5x5x1 : Measurement x=10mm, y=10mm, z=4mm
Zoom Scan         : 5x5x8 : Measurement x=8mm, y=8mm, z=4mm

Other Data
DUT Position      : Touch
Separation        : 15 mm
Channel           : Mid - 835
```

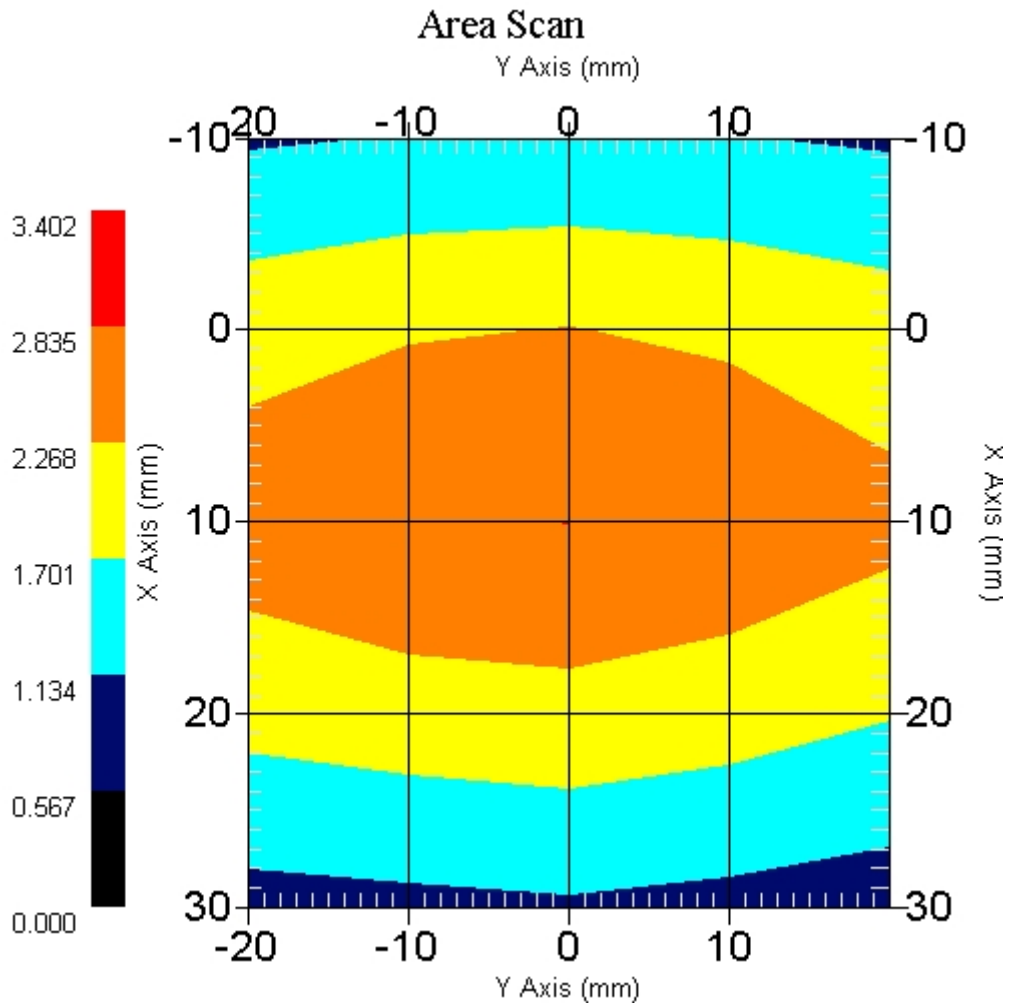


```
1 gram SAR value    : 2.506 W/kg
10 gram SAR value   : 1.633 W/kg
Area Scan Peak SAR  : 2.836 W/kg
Zoom Scan Peak SAR  : 3.893 W/kg
```


*This report shall not be reproduced except in full without the written approval of RF Exposure Lab, LLC.*

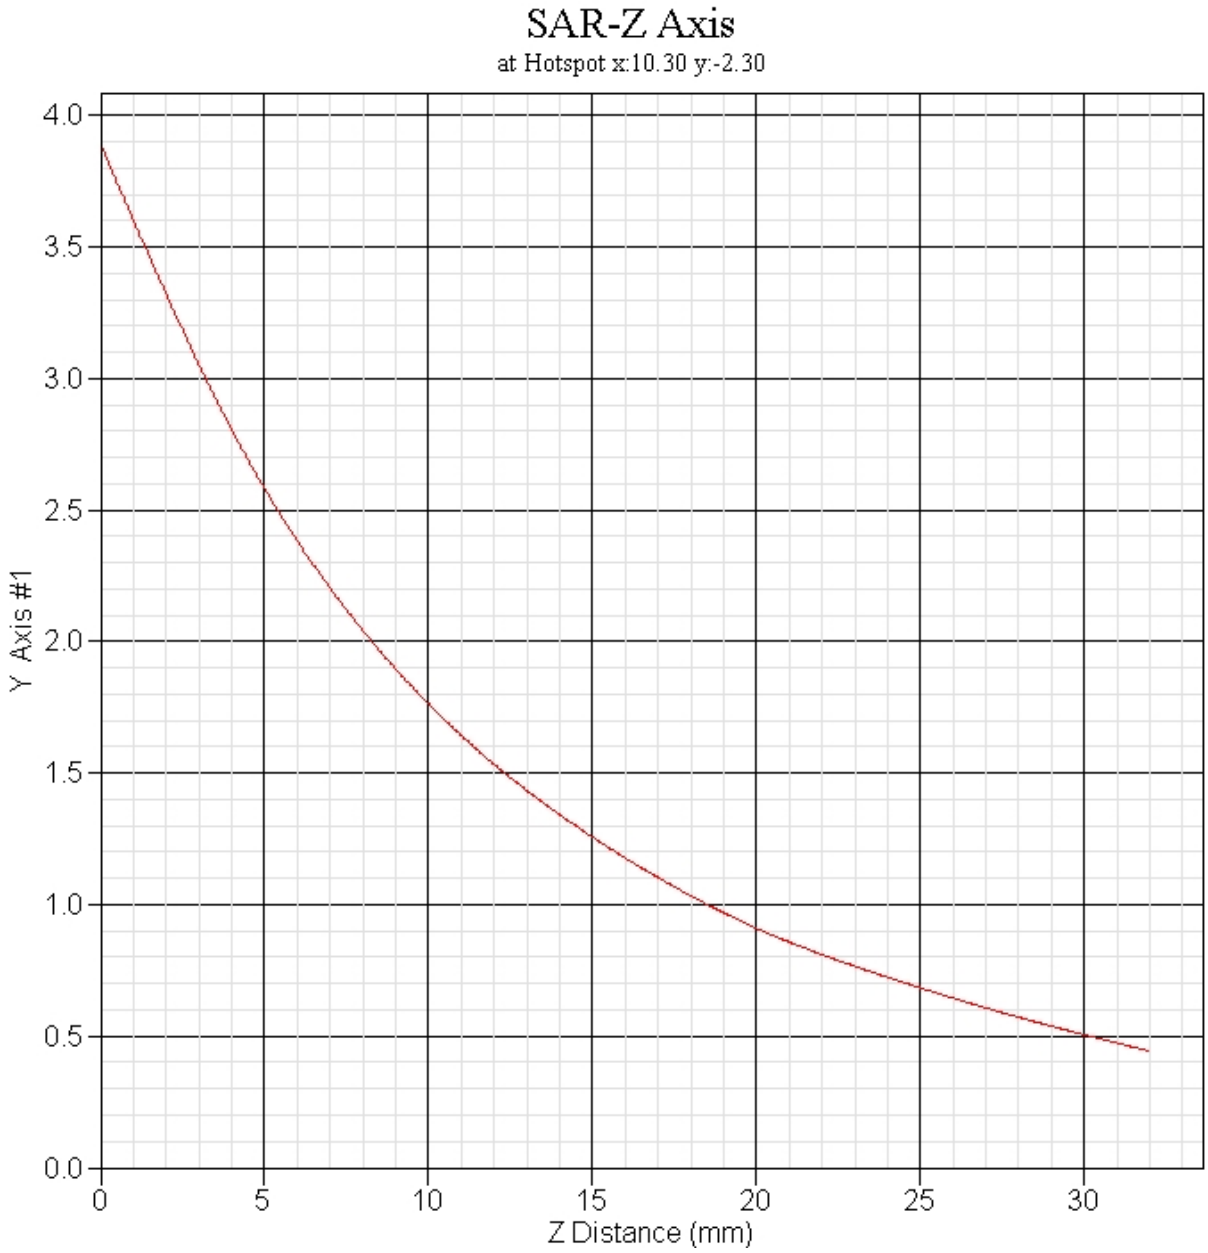



*This report shall not be reproduced except in full without the written approval of RF Exposure Lab, LLC.*

# SAR Test Report

Operator : Jay
Validation Date : 26-Apr-2006
Measurement Date : 26-Apr-2006
Starting Time : 26-Apr-2006 07:37:37 AM
End Time : 26-Apr-2006 07:53:14 AM
Scanning Time : 937 secs

Product Data
Device Name : Validation
Serial No. : 1900
Type : Dipole
Model : ALS-D-1900-S-2
Frequency : 1900.00 MHz
Max. Transmit Pwr : 0.1 W
Drift Time : 0 min(s)
Length : 68 mm
Width : 3.6 mm
Depth : 39.5 mm
Antenna Type : Internal
Power Drift-Start : 2.639 W/kg
Power Drift-Finish: 2.662 W/kg
Power Drift (%) : 0.890

Phantom Data
Name : APREL-Uni
Type : Uni-Phantom
Size (mm) : 280 x 280 x 200
Serial No. : System Default
Location : Center
Description : Uni-Phantom

Tissue Data
Type : HEAD
Serial No. : 1900
Frequency : 1900 MHz
Last Calib. Date : 26-Apr-2006
Temperature : 22 °C
Ambient Temp. : 23 °C
Humidity : 47 RH%
Epsilon : 39.15 F/m
Sigma : 1.43 S/m
Density : 1000 kg/cu. m

Probe Data
Name : Probe 215 - RFEL
Model : E020
Type : E-Field Triangle
Serial No. : 215
Last Calib. Date : 10-Jun-2005
Frequency : 1900 MHz
Duty Cycle Factor: 1
Conversion Factor: 4.5
Probe Sensitivity: 1.20 1.20 1.20 $\mu V/(V/m)^2$
Compression Point: 95 mV
Offset : 1.56 mm


*This report shall not be reproduced except in full without the written approval of RF Exposure Lab, LLC.*

```
Measurement Data
Crest Factor      : 1
Scan Type         : Complete
Tissue Temp.      : 20°C
Ambient Temp.     : 23°C
Set-up Date       : 26-Apr-2006
Set-up Time       : 7:29:11 AM
Area Scan         : 5x6x1 : Measurement x=10mm, y=10mm, z=4mm
Zoom Scan         : 5x5x8 : Measurement x=8mm, y=8mm, z=4mm

Other Data
DUT Position      : Touch
Separation        : 10 mm
Channel           : Mid - 1900
```

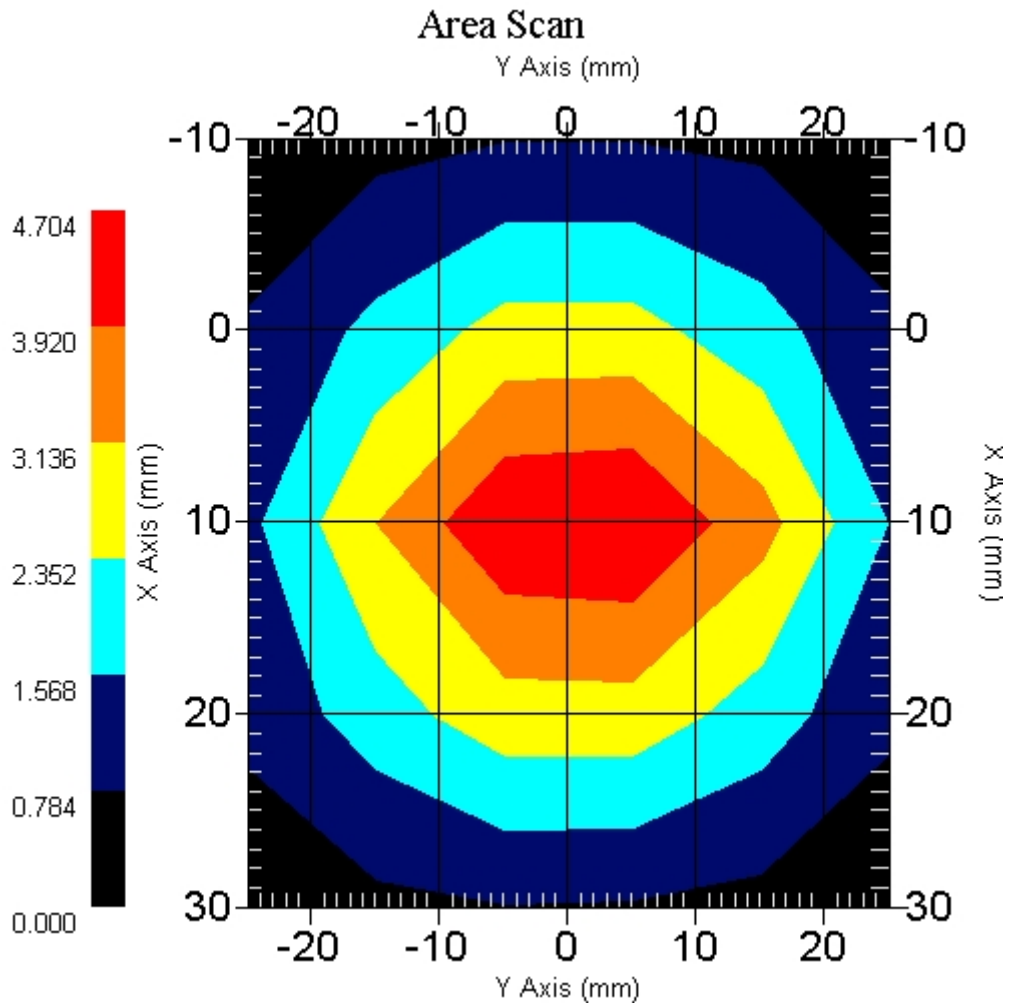


```
1 gram SAR value    : 4.084 W/kg
10 gram SAR value   : 2.100 W/kg
Area Scan Peak SAR  : 4.434 W/kg
Zoom Scan Peak SAR  : 7.626 W/kg
```


*This report shall not be reproduced except in full without the written approval of RF Exposure Lab, LLC.*

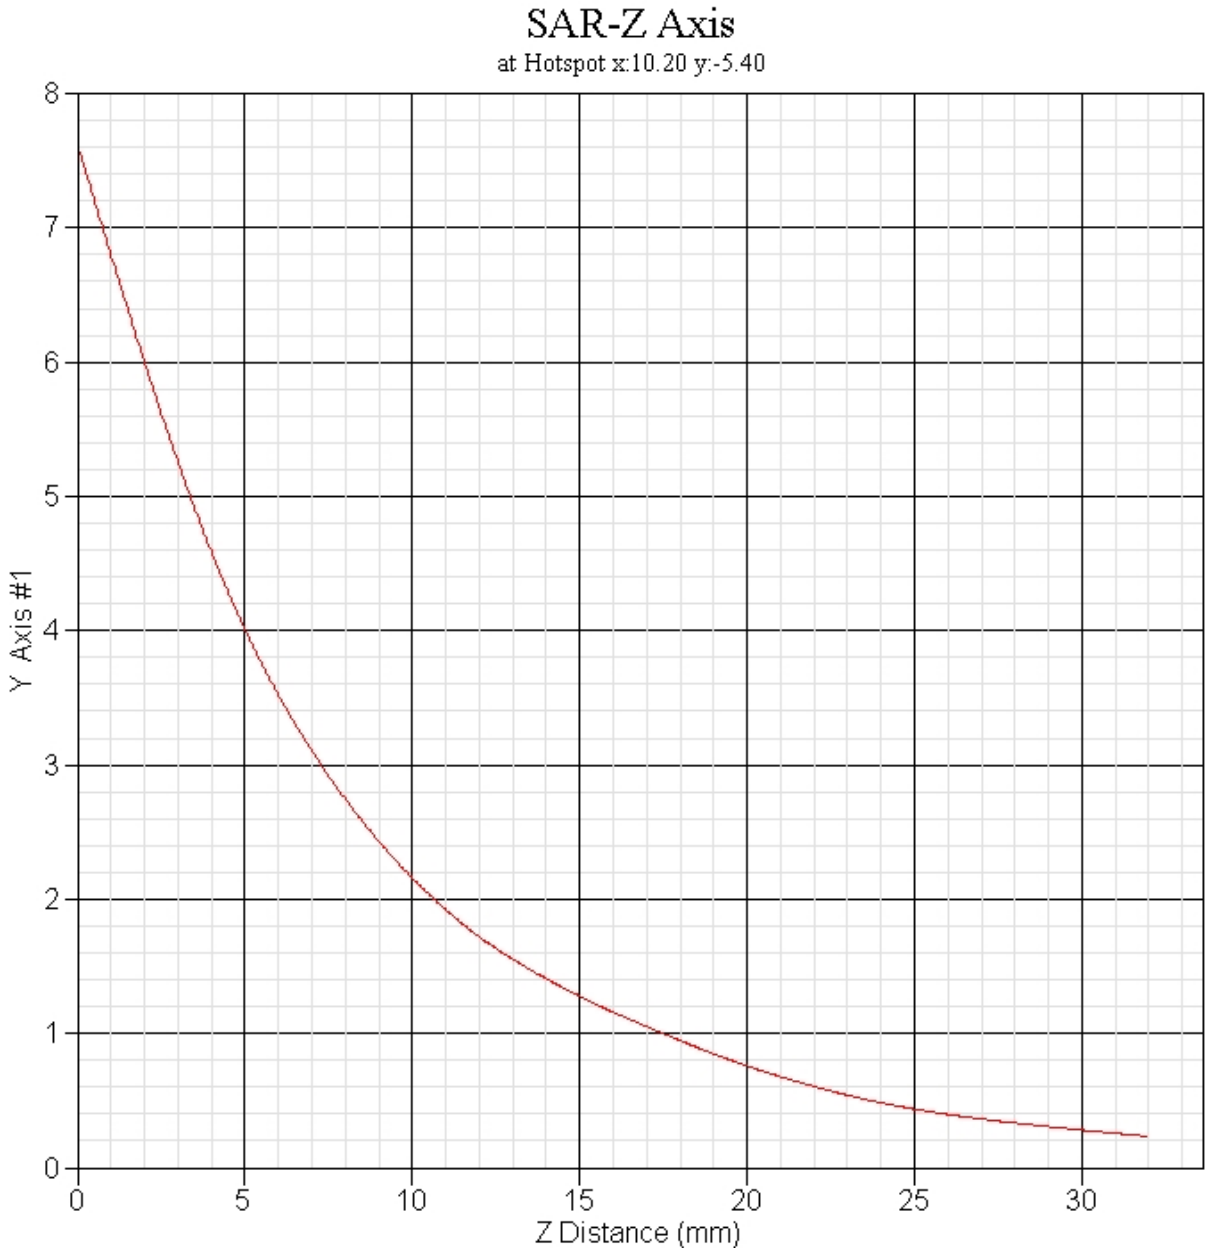



*This report shall not be reproduced except in full without the written approval of RF Exposure Lab, LLC.*

# SAR Test Report

Operator : Jay
Validation Date : 27-Apr-2006
Measurement Date : 27-Apr-2006
Starting Time : 27-Apr-2006 07:12:51 AM
End Time : 27-Apr-2006 07:28:12 AM
Scanning Time : 921 secs

Product Data
Device Name : Validation
Serial No. : 835
Type : Dipole
Model : ALS-D-835-S-2
Frequency : 835.00 MHz
Max. Transmit Pwr : 1 W
Drift Time : 0 min(s)
Length : 161 mm
Width : 3.6 mm
Depth : 89.8 mm
Antenna Type : Internal
Power Drift-Start : 8.534 W/kg
Power Drift-Finish: 8.398 W/kg
Power Drift (%) : -1.647

Phantom Data
Name : APREL-Uni
Type : Uni-Phantom
Size (mm) : 280 x 280 x 200
Serial No. : System Default
Location : Center
Description : Uni-Phantom

Tissue Data
Type : HEAD
Serial No. : 835
Frequency : 835 MHz
Last Calib. Date : 27-Apr-2006
Temperature : 22 °C
Ambient Temp. : 23 °C
Humidity : 48 RH%
Epsilon : 42.24 F/m
Sigma : 0.91 S/m
Density : 1000 kg/cu. m

Probe Data
Name : Probe 215 - RFEL
Model : E020
Type : E-Field Triangle
Serial No. : 215
Last Calib. Date : 10-Jun-2005
Frequency : 835 MHz
Duty Cycle Factor: 1
Conversion Factor: 5.49
Probe Sensitivity: 1.20 1.20 1.20 $\mu V/(V/m)^2$
Compression Point: 95 mV
Offset : 1.56 mm

© 2005 RF Exposure Lab, LLC

*This report shall not be reproduced except in full without the written approval of RF Exposure Lab, LLC.*

```
Measurement Data
Crest Factor      : 1
Scan Type         : Complete
Tissue Temp.      : 20°C
Ambient Temp.     : 23°C
Set-up Date       : 27-Apr-2006
Set-up Time       : 7:05:04 AM
Area Scan         : 5x6x1 : Measurement x=10mm, y=10mm, z=4mm
Zoom Scan         : 5x5x8 : Measurement x=8mm, y=8mm, z=4mm

Other Data
DUT Position      : Touch
Separation        : 15 mm
Channel           : Mid - 835
```

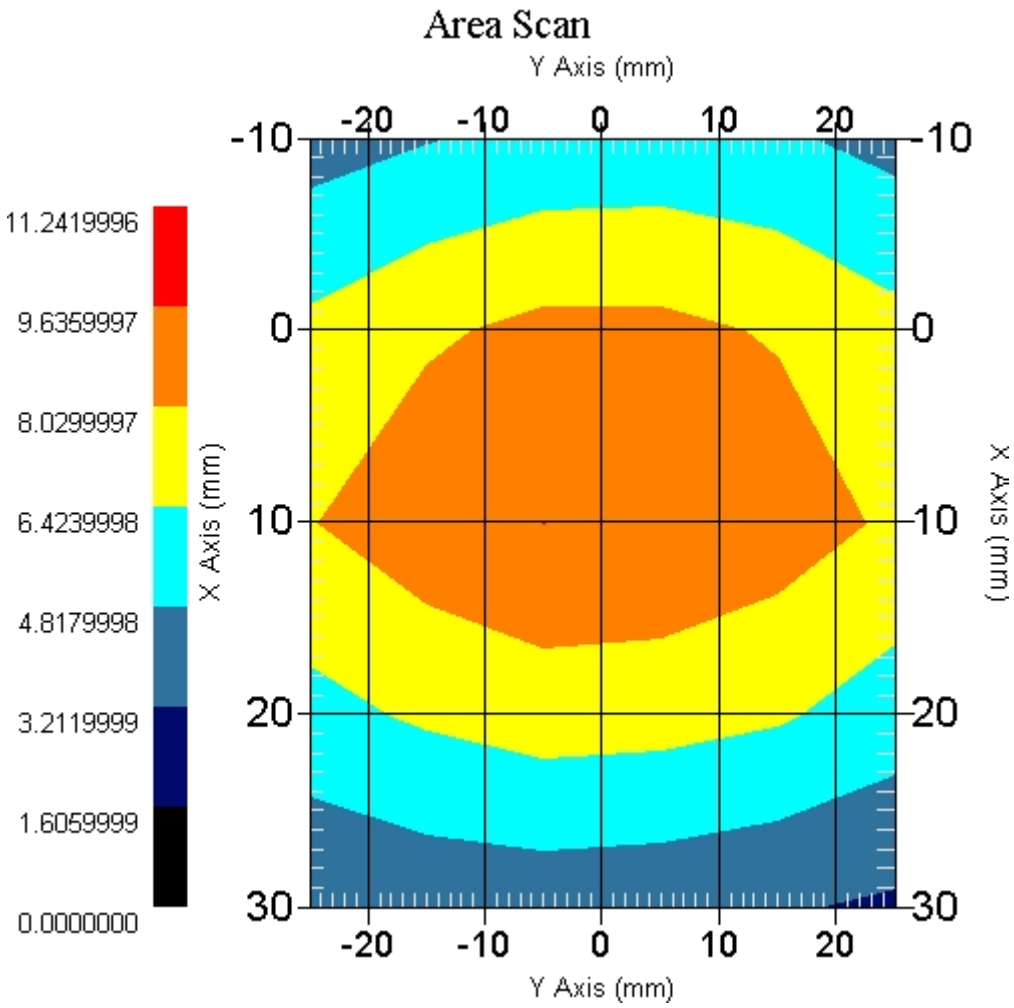


```
1 gram SAR value    : 9.033 W/kg
10 gram SAR value   : 5.892 W/kg
Area Scan Peak SAR  : 9.637 W/kg
Zoom Scan Peak SAR  : 13.712 W/kg
```


*This report shall not be reproduced except in full without the written approval of RF Exposure Lab, LLC.*

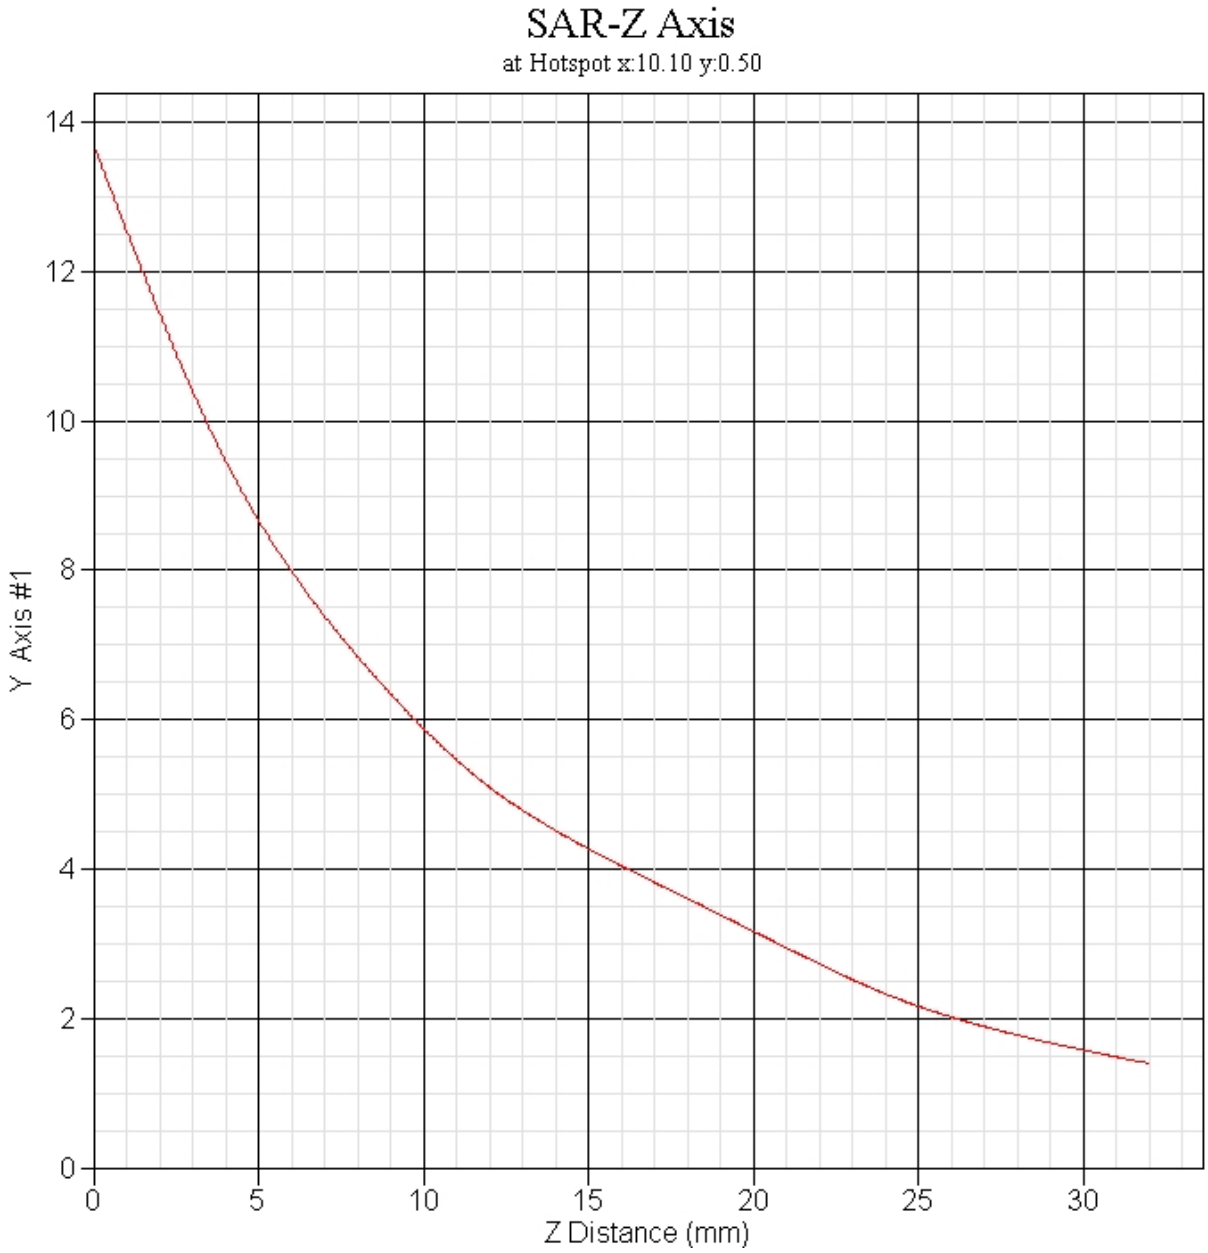



*This report shall not be reproduced except in full without the written approval of RF Exposure Lab, LLC.*

# SAR Test Report

Operator : Jay
Validation Date : 27-Apr-2006
Measurement Date : 27-Apr-2006
Starting Time : 27-Apr-2006 07:40:06 AM
End Time : 27-Apr-2006 07:55:29 AM
Scanning Time : 923 secs

Product Data
Device Name : Validation
Serial No. : 1900
Type : Dipole
Model : ALS-D-1900-S-2
Frequency : 1900.00 MHz
Max. Transmit Pwr : 0.1 W
Drift Time : 0 min(s)
Length : 68 mm
Width : 3.6 mm
Depth : 39.5 mm
Antenna Type : Internal
Power Drift-Start : 2.496 W/kg
Power Drift-Finish: 2.585 W/kg
Power Drift (%) : 3.551

Phantom Data
Name : APREL-Uni
Type : Uni-Phantom
Size (mm) : 280 x 280 x 200
Serial No. : System Default
Location : Center
Description : Uni-Phantom

Tissue Data
Type : HEAD
Serial No. : 1900
Frequency : 1900 MHz
Last Calib. Date : 27-Apr-2006
Temperature : 20 °C
Ambient Temp. : 23 °C
Humidity : 47 RH%
Epsilon : 40.25 F/m
Sigma : 1.42 S/m
Density : 1000 kg/cu. m

Probe Data
Name : Probe 215 - RFEL
Model : E020
Type : E-Field Triangle
Serial No. : 215
Last Calib. Date : 10-Jun-2005
Frequency : 1900 MHz
Duty Cycle Factor: 1
Conversion Factor: 4.5
Probe Sensitivity: 1.20 1.20 1.20 $\mu V/(V/m)^2$
Compression Point: 95 mV
Offset : 1.56 mm


*This report shall not be reproduced except in full without the written approval of RF Exposure Lab, LLC.*

```
Measurement Data
Crest Factor      : 1
Scan Type         : Complete
Tissue Temp.      : 20°C
Ambient Temp.     : 23°C
Set-up Date       : 27-Apr-2006
Set-up Time       : 9:39:11 AM
Area Scan         : 5x6x1 : Measurement x=10mm, y=10mm, z=4mm
Zoom Scan         : 5x5x8 : Measurement x=8mm, y=8mm, z=4mm

Other Data
DUT Position      : Touch
Separation        : 10 mm
Channel           : Mid - 1900
```

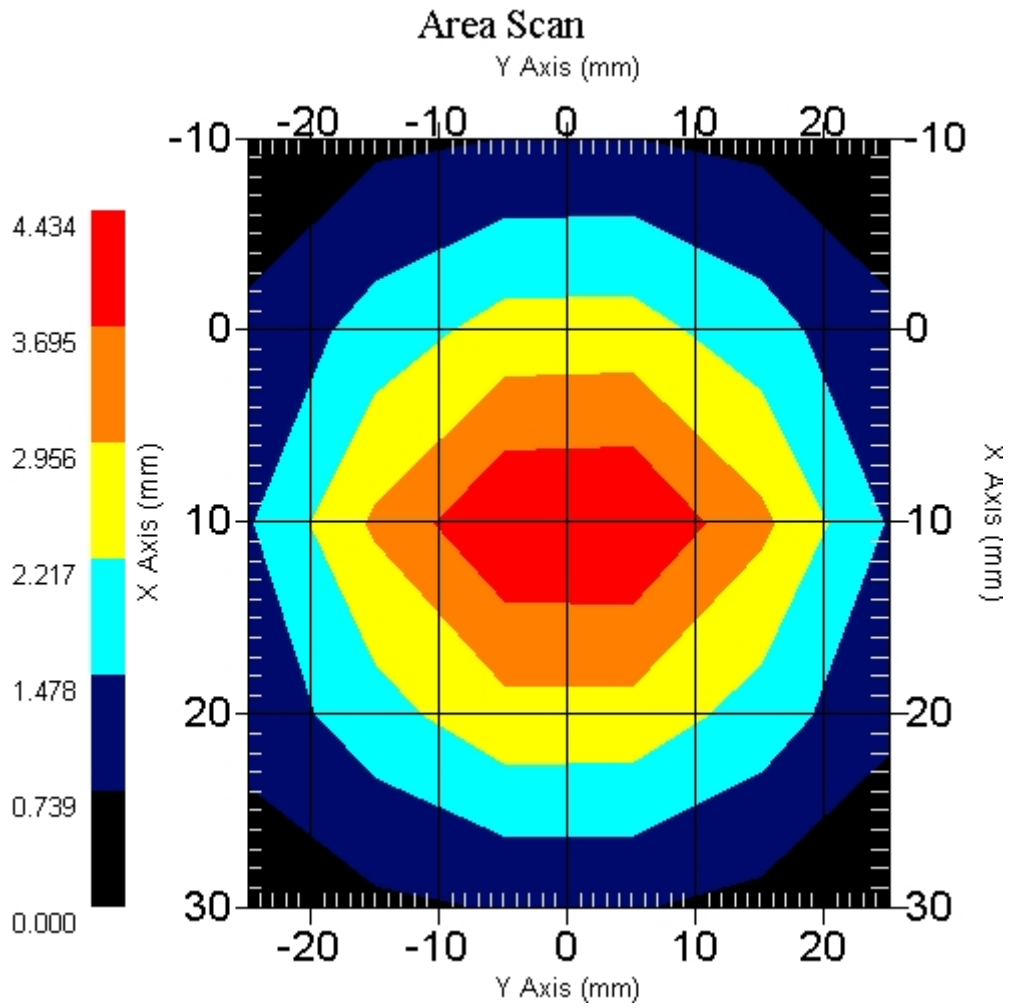


```
1 gram SAR value    : 3.922 W/kg
10 gram SAR value   : 1.979 W/kg
Area Scan Peak SAR  : 4.386 W/kg
Zoom Scan Peak SAR  : 7.476 W/kg
```


*This report shall not be reproduced except in full without the written approval of RF Exposure Lab, LLC.*

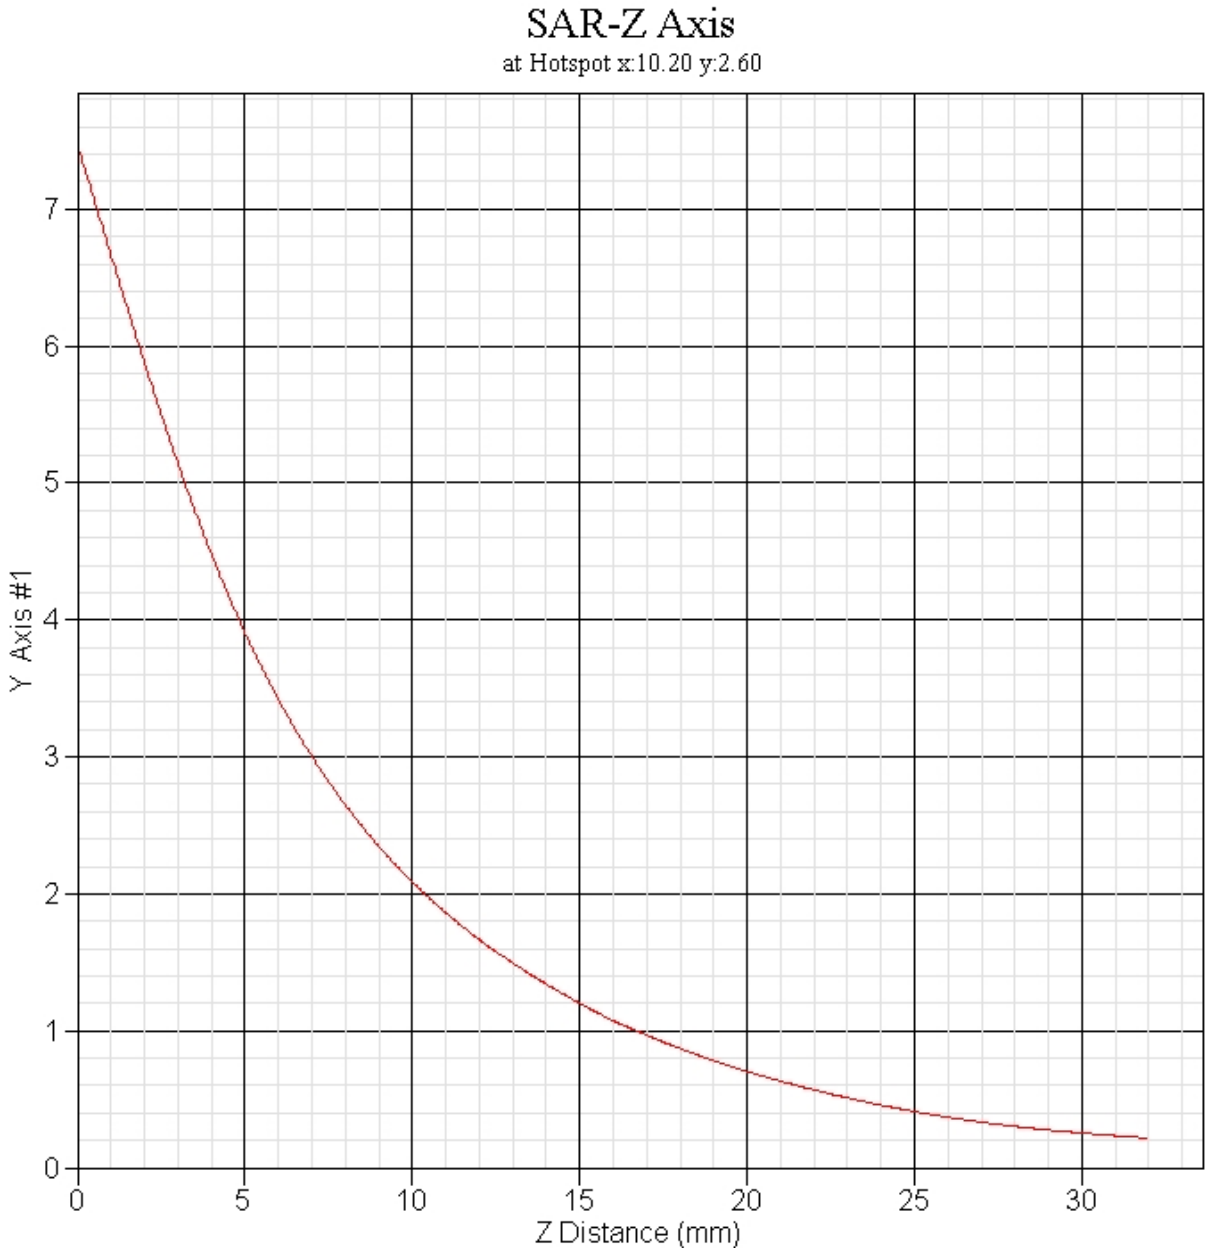



*This report shall not be reproduced except in full without the written approval of RF Exposure Lab, LLC.*

# SAR Test Report

Operator : Jay
Validation Date : 28-Apr-2006
Measurement Date : 28-Apr-2006
Starting Time : 28-Apr-2006 07:16:26 AM
End Time : 28-Apr-2006 07:21:45 AM
Scanning Time : 919 secs

Product Data
Device Name : Validation
Serial No. : 835
Type : Dipole
Model : ALS-D-835-S-2
Frequency : 835.00 MHz
Max. Transmit Pwr : 1 W
Drift Time : 0 min(s)
Length : 161 mm
Width : 3.6 mm
Depth : 89.8 mm
Antenna Type : Internal
Power Drift-Start : 9.139 W/kg
Power Drift-Finish: 9.446 W/kg
Power Drift (%) : 3.355

Phantom Data
Name : APREL-Uni
Type : Uni-Phantom
Size (mm) : 280 x 280 x 200
Serial No. : System Default
Location : Center
Description : Uni-Phantom

Tissue Data
Type : HEAD
Serial No. : 835
Frequency : 835 MHz
Last Calib. Date : 28-Apr-2006
Temperature : 20 °C
Ambient Temp. : 23 °C
Humidity : 48 RH%
Epsilon : 40.92 F/m
Sigma : 0.92 S/m
Density : 1000 kg/cu. m

Probe Data
Name : Probe 215 - RFEL
Model : E020
Type : E-Field Triangle
Serial No. : 215
Last Calib. Date : 10-Jun-2005
Frequency : 835 MHz
Duty Cycle Factor: 1
Conversion Factor: 5.49
Probe Sensitivity: 1.20 1.20 1.20 $\mu V/(V/m)^2$
Compression Point: 95 mV
Offset : 1.56 mm


*This report shall not be reproduced except in full without the written approval of RF Exposure Lab, LLC.*

```
Measurement Data
Crest Factor      : 1
Scan Type         : Complete
Tissue Temp.      : 20°C
Ambient Temp.     : 23°C
Set-up Date       : 28-Apr-2006
Set-up Time       : 7:15:04 AM
Area Scan         : 5x6x1 : Measurement x=10mm, y=10mm, z=4mm
Zoom Scan         : 5x5x8 : Measurement x=8mm, y=8mm, z=4mm

Other Data
DUT Position      : Touch
Separation        : 15 mm
Channel           : Mid - 835
```

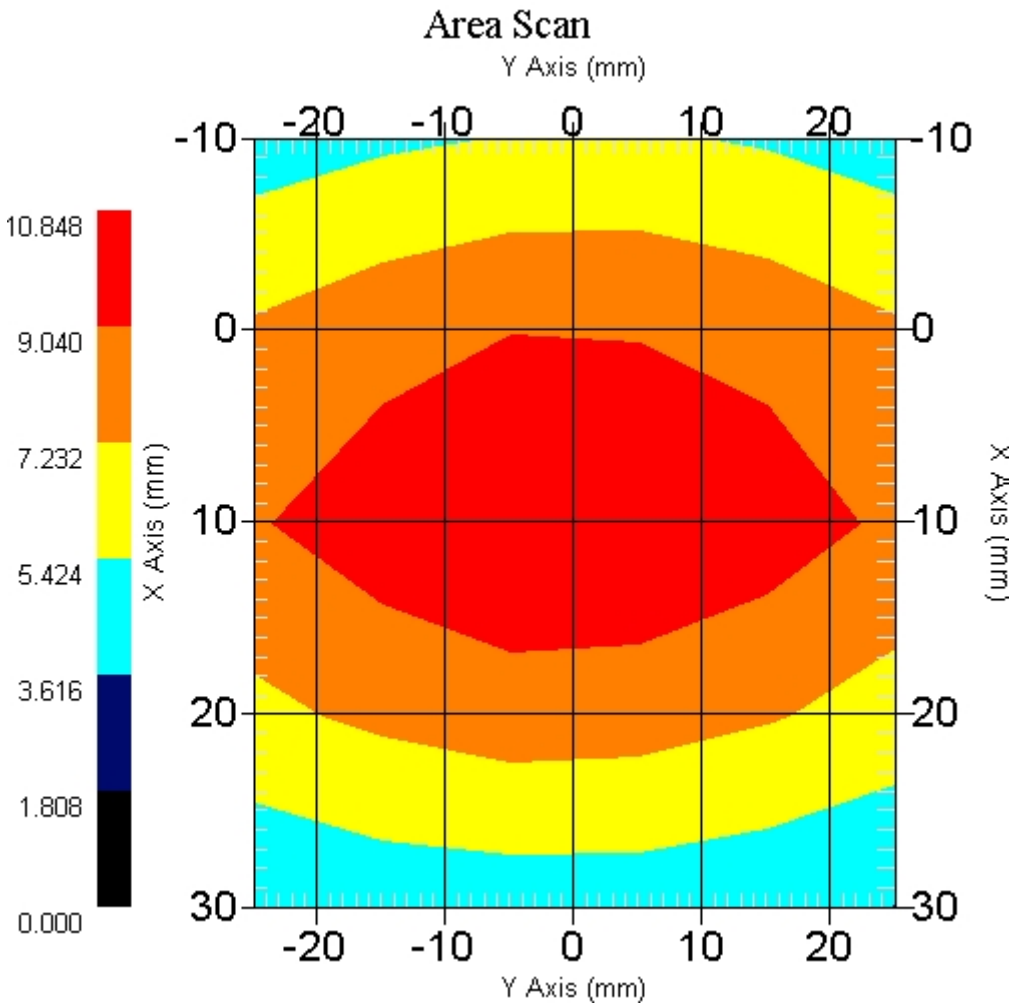


```
1 gram SAR value    : 9.552 W/kg
10 gram SAR value   : 6.284 W/kg
Area Scan Peak SAR : 10.462 W/kg
Zoom Scan Peak SAR : 14.012 W/kg
```


*This report shall not be reproduced except in full without the written approval of RF Exposure Lab, LLC.*

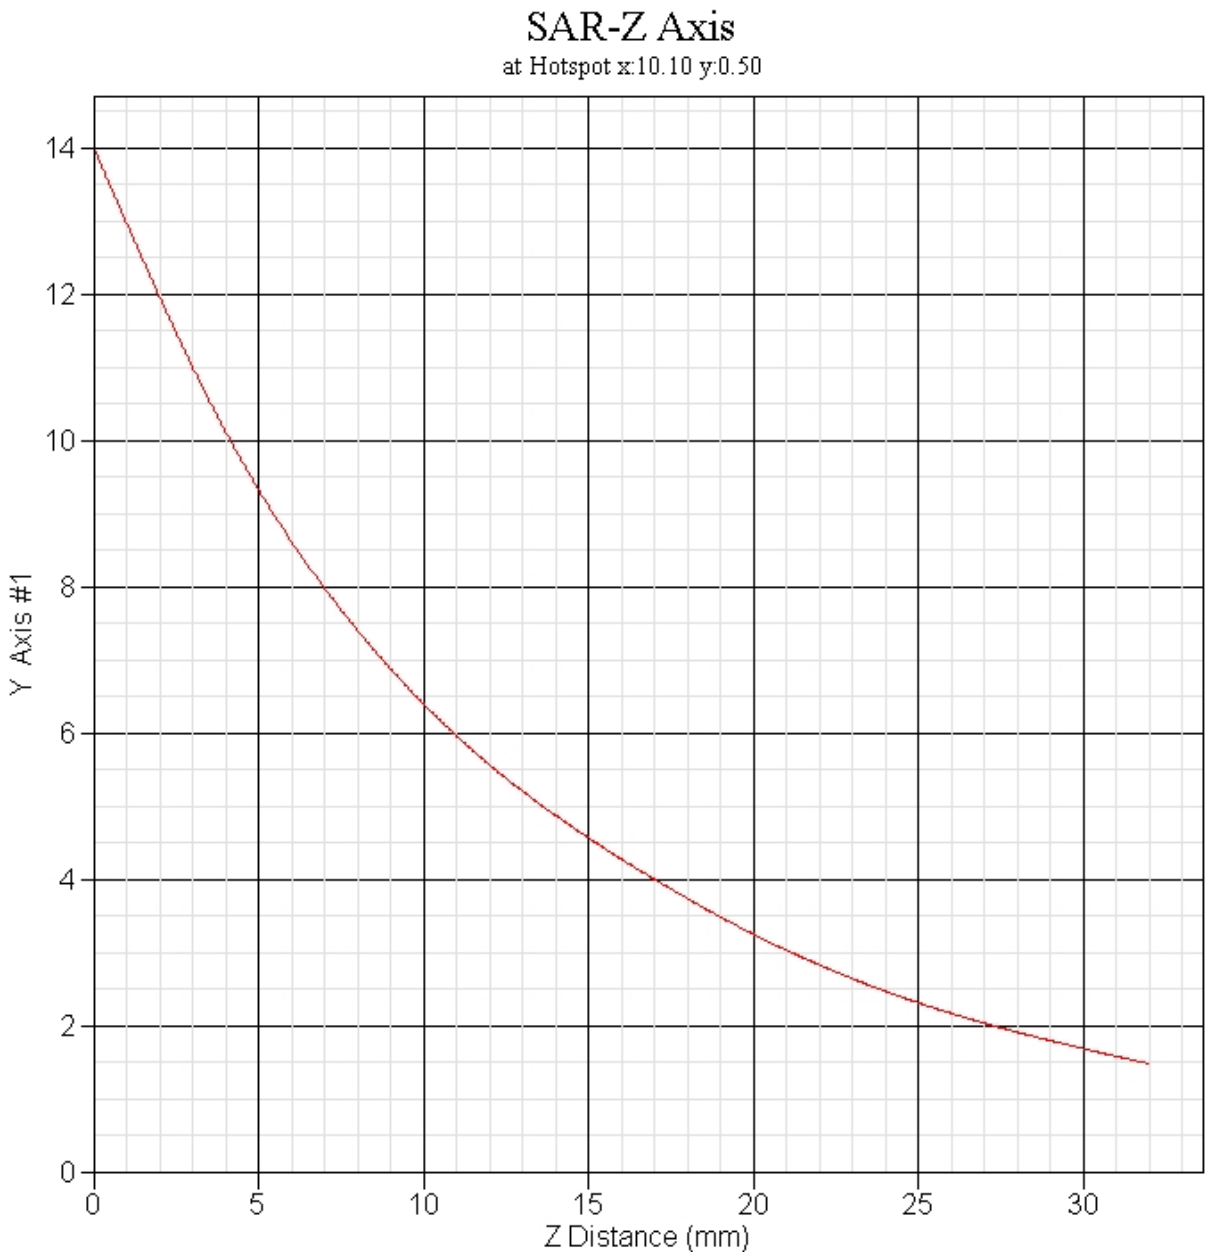



*This report shall not be reproduced except in full without the written approval of RF Exposure Lab, LLC.*

# SAR Test Report

Validation Date : 28-Apr-2006
Measurement Date : 28-Apr-2006
Starting Time : 28-Apr-2006 07:39:24 AM
End Time : 28-Apr-2006 07:55:00 AM
Scanning Time : 936 secs

Product Data
Device Name : Validation
Serial No. : 1900
Type : Dipole
Model : ALS-D-1900-S-2
Frequency : 1900.00 MHz
Max. Transmit Pwr : 0.1 W
Drift Time : 0 min(s)
Length : 68 mm
Width : 3.6 mm
Depth : 39.5 mm
Antenna Type : Internal
Power Drift-Start : 2.568 W/kg
Power Drift-Finish: 2.616 W/kg
Power Drift (%) : 1.869

Phantom Data
Name : APREL-Uni
Type : Uni-Phantom
Size (mm) : 280 x 280 x 200
Serial No. : System Default
Location : Center
Description : Uni-Phantom

Tissue Data
Type : BODY
Serial No. : 1900
Frequency : 1900 MHz
Last Calib. Date : 28-Apr-2006
Temperature : 20 °C
Ambient Temp. : 23 °C
Humidity : 55 RH%
Epsilon : 52.71 F/m
Sigma : 1.49 S/m
Density : 1000 kg/cu. m

Probe Data
Name : Probe 215 - RFEL
Model : E020
Type : E-Field Triangle
Serial No. : 215
Last Calib. Date : 10-Jun-2005
Frequency : 1900 MHz
Duty Cycle Factor: 1
Conversion Factor: 3.8
Probe Sensitivity: 1.20 1.20 1.20 $\mu V/(V/m)^2$
Compression Point: 95 mV
Offset : 1.56 mm

© 2005 RF Exposure Lab, LLC

*This report shall not be reproduced except in full without the written approval of RF Exposure Lab, LLC.*

```
Measurement Data
Crest Factor      : 1
Scan Type         : Complete
Tissue Temp.      : 20°C
Ambient Temp.     : 23°C
Set-up Date       : 28-Apr-2006
Set-up Time       : 7:36:17 AM
Area Scan         : 5x6x1 : Measurement x=10mm, y=10mm, z=4mm
Zoom Scan         : 5x5x8 : Measurement x=8mm, y=8mm, z=4mm

Other Data
DUT Position      : Touch
Separation        : 10 mm
Channel           : Mid - 1900
```

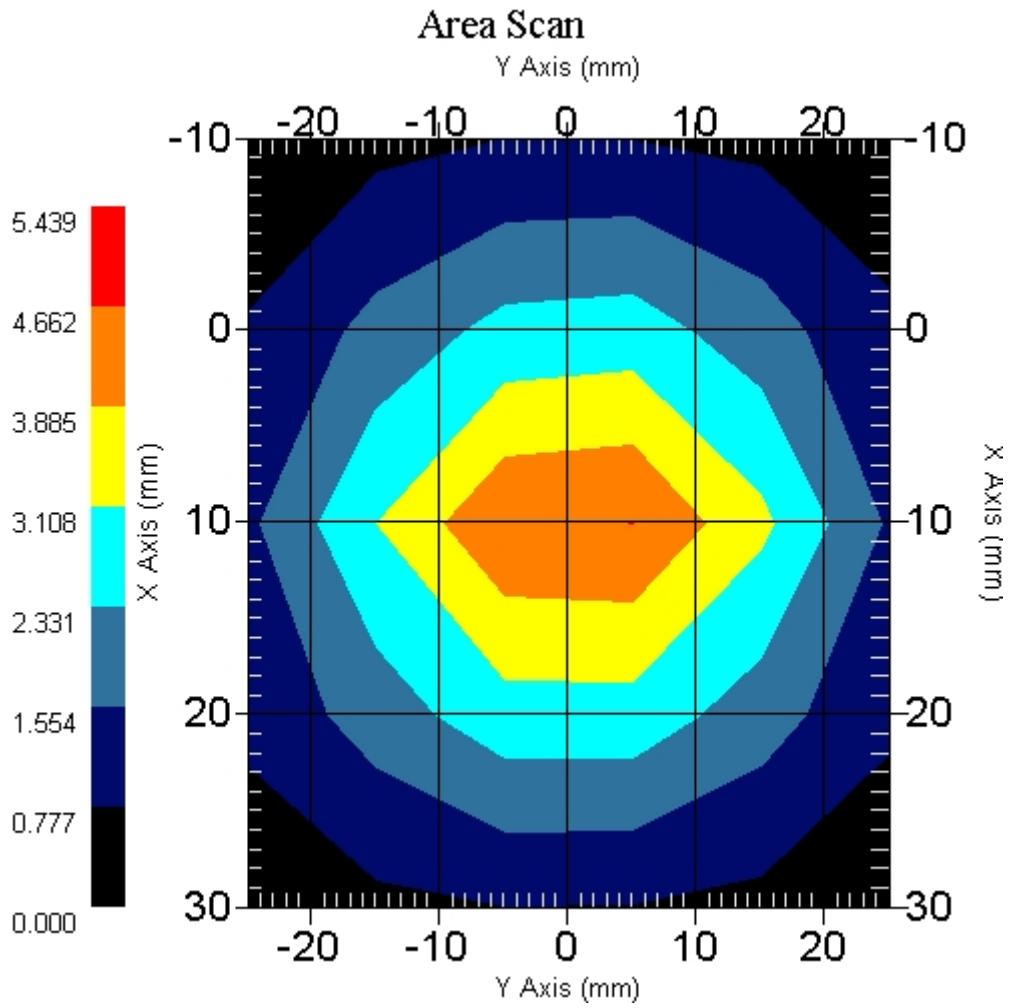


```
1 gram SAR value    : 4.132 W/kg
10 gram SAR value   : 2.110 W/kg
Area Scan Peak SAR  : 4.664 W/kg
Zoom Scan Peak SAR  : 7.736 W/kg
```


*This report shall not be reproduced except in full without the written approval of RF Exposure Lab, LLC.*

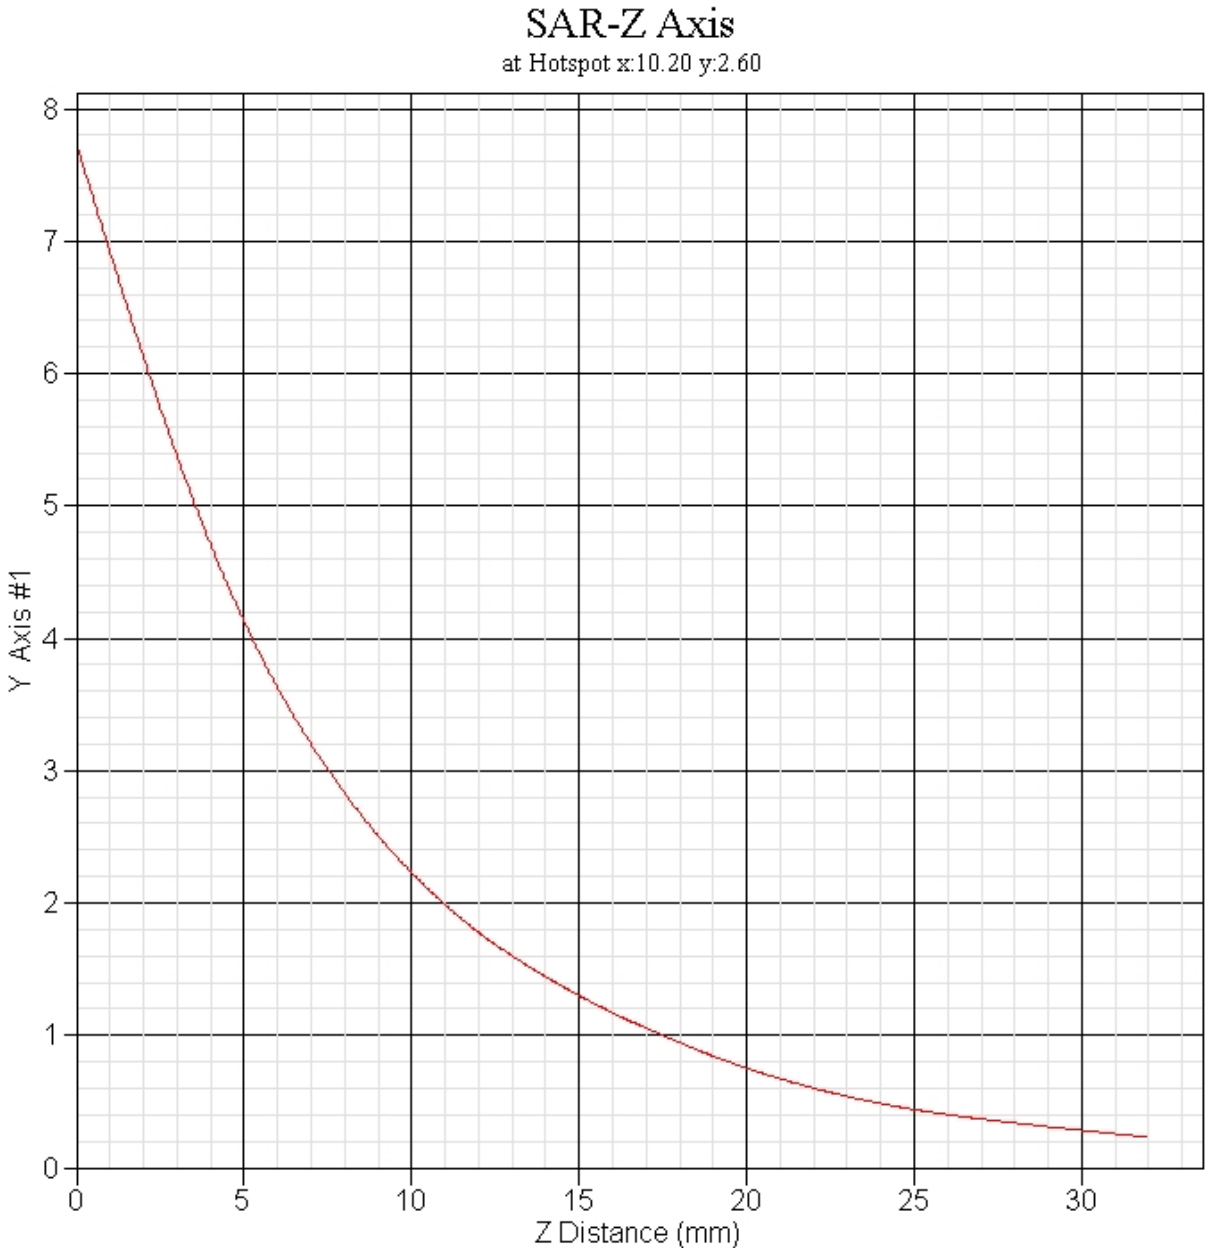



*This report shall not be reproduced except in full without the written approval of RF Exposure Lab, LLC.*

# Appendix B – SAR Test Data Plots


*This report shall not be reproduced except in full without the written approval of RF Exposure Lab, LLC.*

# SAR Test Report

By Operator : Jay
Measurement Date : 12-Apr-2006
Starting Time : 12-Apr-2006 10:24:27 AM
End Time : 12-Apr-2006 10:53:46 AM
Scanning Time : 1759 secs

Product Data
Device Name : CardioNet
Serial No. : 10061
Type : Std Form Cell Phone
Model : 100-0023-01
Frequency : 900.00 MHz
Max. Transmit Pwr : 0.032 W
Drift Time : 0 min(s)
Length : 120 mm
Width : 62 mm
Depth : 24 mm
Antenna Type : Internal
Orientation : Touch
Power Drift-Start : 0.022 W/kg
Power Drift-Finish: 0.018 W/kg
Power Drift (%) : -18.930

Phantom Data
Name : APREL-SAM Right Ear
Type : SAM-Right
Size (mm) : 280 x 280 x 280
Serial No. : User Define
Location : Right
Description : Polygon Right

Tissue Data
Type : HEAD
Serial No. : 900
Frequency : 900.00 MHz
Last Calib. Date : 12-Apr-2006
Temperature : 20.00 °C
Ambient Temp. : 22.00 °C
Humidity : 43.00 RH%
Epsilon : 40.23 F/m
Sigma : 0.96 S/m
Density : 1000.00 kg/cu. m

Probe Data
Name : Probe 215 - RFEL
Model : E020
Type : E-Field Triangle
Serial No. : 215
Last Calib. Date : 10-Jun-2005
Frequency : 835.00 MHz
Duty Cycle Factor: 1
Conversion Factor: 5.49
Probe Sensitivity: 1.20 1.20 1.20 $\mu V/(V/m)^2$
Compression Point: 95.00 mV
Offset : 1.56 mm

© 2005 RF Exposure Lab, LLC

*This report shall not be reproduced except in full without the written approval of RF Exposure Lab, LLC.*

```
Measurement Data
Crest Factor      : 1
Scan Type         : Complete
Tissue Temp.      : 20.00 °C
Ambient Temp.     : 22.00 °C
Set-up Date       : 12-Apr-2006
Set-up Time       : 10:17:17 AM
Area Scan         : 5x5x1 : Measurement x=10mm, y=10mm, z=4mm
Zoom Scan         : 5x5x8 : Measurement x=8mm, y=8mm, z=4mm

Other Data
DUT Position      : Touch
Separation        : 0
Channel           : Low - 0
```

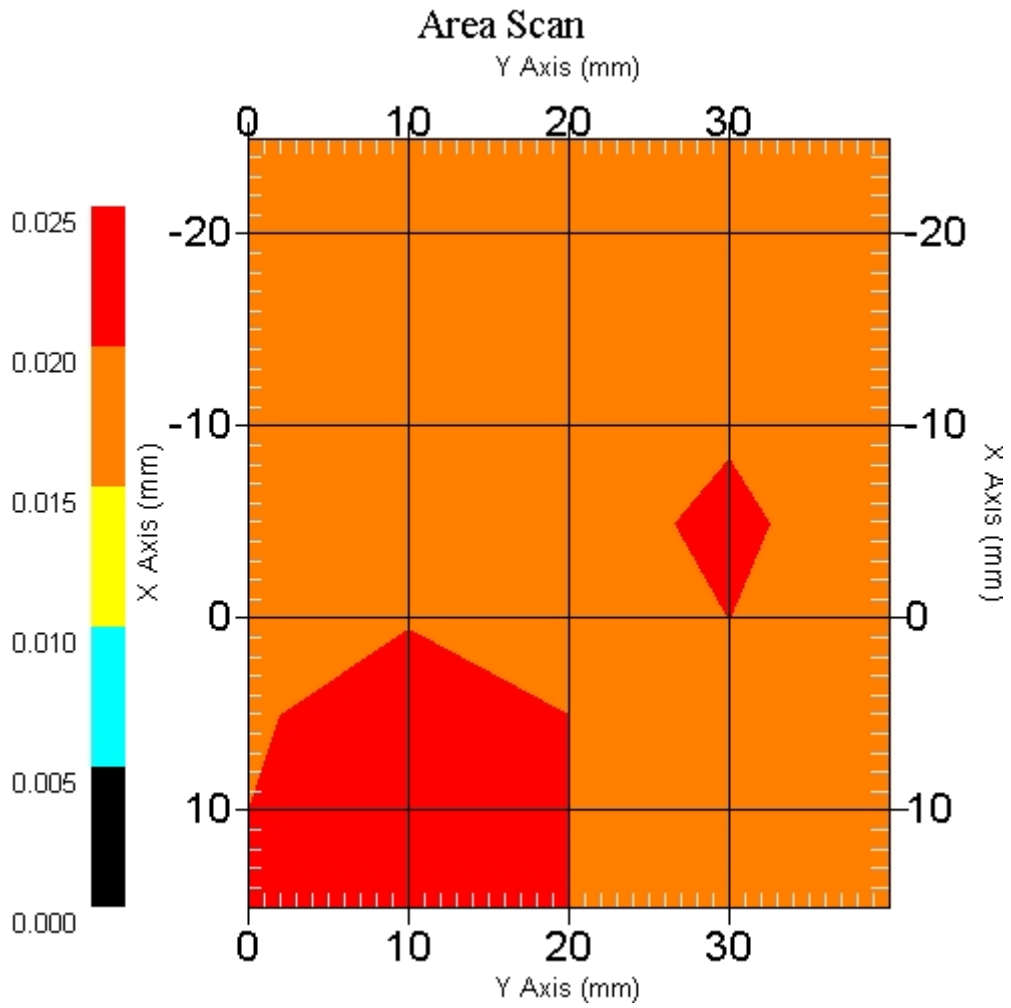


```
1 gram SAR value    : 0.021 W/kg
10 gram SAR value   : 0.018 W/kg
Area Scan Peak SAR  : 0.024 W/kg
Zoom Scan Peak SAR  : 0.020 W/kg
```


*This report shall not be reproduced except in full without the written approval of RF Exposure Lab, LLC.*

# SAR Test Report

By Operator : Jay
Measurement Date : 12-Apr-2006
Starting Time : 12-Apr-2006 11:20:44 AM
End Time : 12-Apr-2006 11:41:59 AM
Scanning Time : 1275 secs

Product Data
Device Name : CardioNet
Serial No. : 10061
Type : Std Form Cell Phone
Model : 100-0023-01
Frequency : 900.00 MHz
Max. Transmit Pwr : 0.032 W
Drift Time : 0 min(s)
Length : 120 mm
Width : 62 mm
Depth : 24 mm
Antenna Type : Internal
Orientation : Touch
Power Drift-Start : 0.026 W/kg
Power Drift-Finish: 0.020 W/kg
Power Drift (%) : -23.416

Phantom Data
Name : APREL-SAM Right Ear
Type : SAM-Right
Size (mm) : 280 x 280 x 280
Serial No. : User Define
Location : Right
Description : Polygon Right

Tissue Data
Type : HEAD
Serial No. : 900
Frequency : 900.00 MHz
Last Calib. Date : 12-Apr-2006
Temperature : 20.00 °C
Ambient Temp. : 22.00 °C
Humidity : 43.00 RH%
Epsilon : 40.23 F/m
Sigma : 0.96 S/m
Density : 1000.00 kg/cu. m

Probe Data
Name : Probe 215 - RFEL
Model : E020
Type : E-Field Triangle
Serial No. : 215
Last Calib. Date : 10-Jun-2005
Frequency : 835.00 MHz
Duty Cycle Factor: 1
Conversion Factor: 5.49
Probe Sensitivity: 1.20 1.20 1.20 $\mu V/(V/m)^2$
Compression Point: 95.00 mV
Offset : 1.56 mm

© 2005 RF Exposure Lab, LLC

*This report shall not be reproduced except in full without the written approval of RF Exposure Lab, LLC.*

```
Measurement Data
Crest Factor      : 1
Scan Type         : Complete
Tissue Temp.      : 20.00 °C
Ambient Temp.     : 22.00 °C
Set-up Date       : 12-Apr-2006
Set-up Time       : 10:17:17 AM
Area Scan         : 5x5x1 : Measurement x=10mm, y=10mm, z=4mm
Zoom Scan         : 5x5x8 : Measurement x=8mm, y=8mm, z=4mm

Other Data
DUT Position      : Touch
Separation        : 0
Channel           : Mid - 15
```

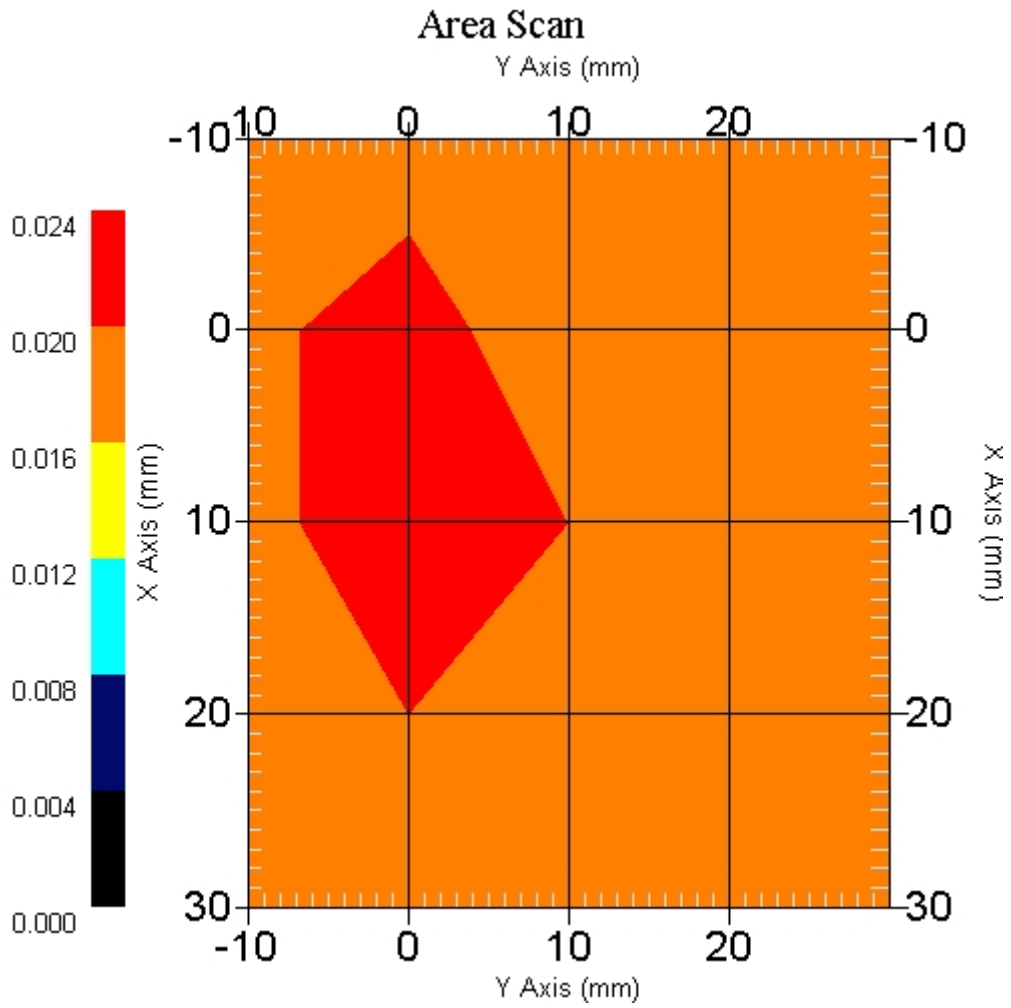


```
1 gram SAR value   : 0.021 W/kg
10 gram SAR value  : 0.019 W/kg
Area Scan Peak SAR : 0.022 W/kg
Zoom Scan Peak SAR : 0.020 W/kg
```


*This report shall not be reproduced except in full without the written approval of RF Exposure Lab, LLC.*

# SAR Test Report

By Operator : Jay
Measurement Date : 12-Apr-2006
Starting Time : 12-Apr-2006 11:51:02 AM
End Time : 12-Apr-2006 12:28:07 PM
Scanning Time : 2225 secs

Product Data
Device Name : CardioNet
Serial No. : 10061
Type : Std Form Cell Phone
Model : 100-0023-01
Frequency : 900.00 MHz
Max. Transmit Pwr : 0.032 W
Drift Time : 0 min(s)
Length : 120 mm
Width : 62 mm
Depth : 24 mm
Antenna Type : Internal
Orientation : Touch
Power Drift-Start : 0.016 W/kg
Power Drift-Finish: 0.017 W/kg
Power Drift (%) : 6.157

Phantom Data
Name : APREL-SAM Right Ear
Type : SAM-Right
Size (mm) : 280 x 280 x 280
Serial No. : User Define
Location : Right
Description : Polygon Right

Tissue Data
Type : HEAD
Serial No. : 900
Frequency : 900.00 MHz
Last Calib. Date : 12-Apr-2006
Temperature : 20.00 °C
Ambient Temp. : 22.00 °C
Humidity : 43.00 RH%
Epsilon : 40.23 F/m
Sigma : 0.96 S/m
Density : 1000.00 kg/cu. m

Probe Data
Name : Probe 215 - RFEL
Model : E020
Type : E-Field Triangle
Serial No. : 215
Last Calib. Date : 10-Jun-2005
Frequency : 835.00 MHz
Duty Cycle Factor: 1
Conversion Factor: 5.49
Probe Sensitivity: 1.20 1.20 1.20 $\mu V/(V/m)^2$
Compression Point: 95.00 mV
Offset : 1.56 mm

© 2005 RF Exposure Lab, LLC

*This report shall not be reproduced except in full without the written approval of RF Exposure Lab, LLC.*

```
Measurement Data
Crest Factor      : 1
Scan Type         : Complete
Tissue Temp.      : 20.00 °C
Ambient Temp.     : 22.00 °C
Set-up Date       : 12-Apr-2006
Set-up Time       : 10:17:17 AM
Area Scan         : 5x5x1 : Measurement x=10mm, y=10mm, z=4mm
Zoom Scan         : 5x5x8 : Measurement x=8mm, y=8mm, z=4mm

Other Data
DUT Position      : Touch
Separation        : 0
Channel           : High - 31
```

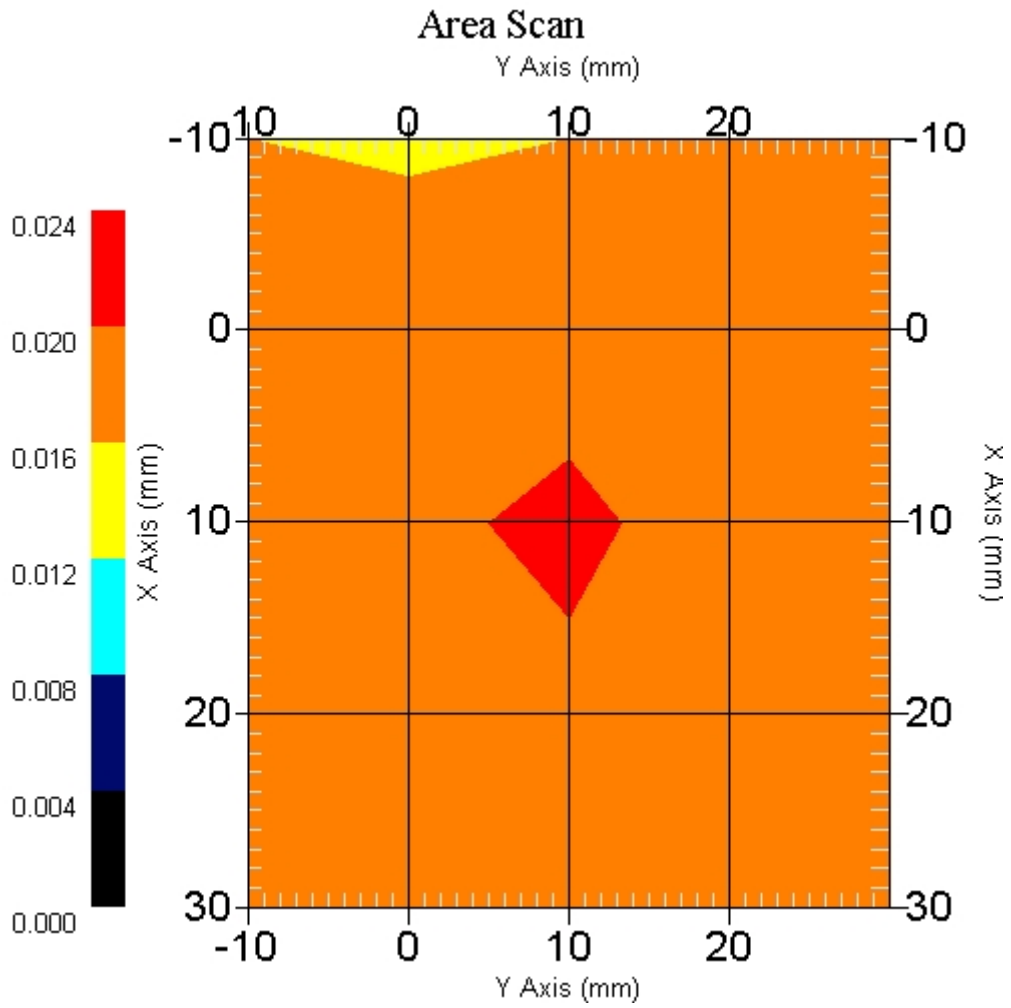


```
1 gram SAR value   : 0.026 W/kg
10 gram SAR value  : 0.049 W/kg
Area Scan Peak SAR : 0.021 W/kg
Zoom Scan Peak SAR : 0.020 W/kg
```


*This report shall not be reproduced except in full without the written approval of RF Exposure Lab, LLC.*

# SAR Test Report

By Operator : Jay
Measurement Date : 12-Apr-2006
Starting Time : 12-Apr-2006 02:43:02 PM
End Time : 12-Apr-2006 03:06:17 PM
Scanning Time : 1395 secs

Product Data
Device Name : CardioNet
Serial No. : 10061
Type : Std Form Cell Phone
Model : 100-0023-01
Frequency : 900.00 MHz
Max. Transmit Pwr : 0.032 W
Drift Time : 0 min(s)
Length : 120 mm
Width : 62 mm
Depth : 24 mm
Antenna Type : Internal
Orientation : 15° Tilt
Power Drift-Start : 0.021 W/kg
Power Drift-Finish: 0.021 W/kg
Power Drift (%) : -1.761

Phantom Data
Name : APREL-SAM Right Ear
Type : SAM-Right
Size (mm) : 280 x 280 x 280
Serial No. : User Define
Location : Right
Description : Polygon Right

Tissue Data
Type : HEAD
Serial No. : 900
Frequency : 900.00 MHz
Last Calib. Date : 12-Apr-2006
Temperature : 20.00 °C
Ambient Temp. : 22.00 °C
Humidity : 43.00 RH%
Epsilon : 40.23 F/m
Sigma : 0.96 S/m
Density : 1000.00 kg/cu. m

Probe Data
Name : Probe 215 - RFEL
Model : E020
Type : E-Field Triangle
Serial No. : 215
Last Calib. Date : 10-Jun-2005
Frequency : 835.00 MHz
Duty Cycle Factor: 1
Conversion Factor: 5.49
Probe Sensitivity: 1.20 1.20 1.20 $\mu V/(V/m)^2$
Compression Point: 95.00 mV
Offset : 1.56 mm

© 2005 RF Exposure Lab, LLC

*This report shall not be reproduced except in full without the written approval of RF Exposure Lab, LLC.*

```
Measurement Data
Crest Factor      : 1
Scan Type         : Complete
Tissue Temp.      : 20.00 °C
Ambient Temp.     : 22.00 °C
Set-up Date       : 12-Apr-2006
Set-up Time       : 10:17:17 AM
Area Scan         : 6x6x1 : Measurement x=10mm, y=10mm, z=4mm
Zoom Scan         : 5x5x8 : Measurement x=8mm, y=8mm, z=4mm

Other Data
DUT Position      : 15° Tilt
Separation        : 0
Channel           : Low - 0
```

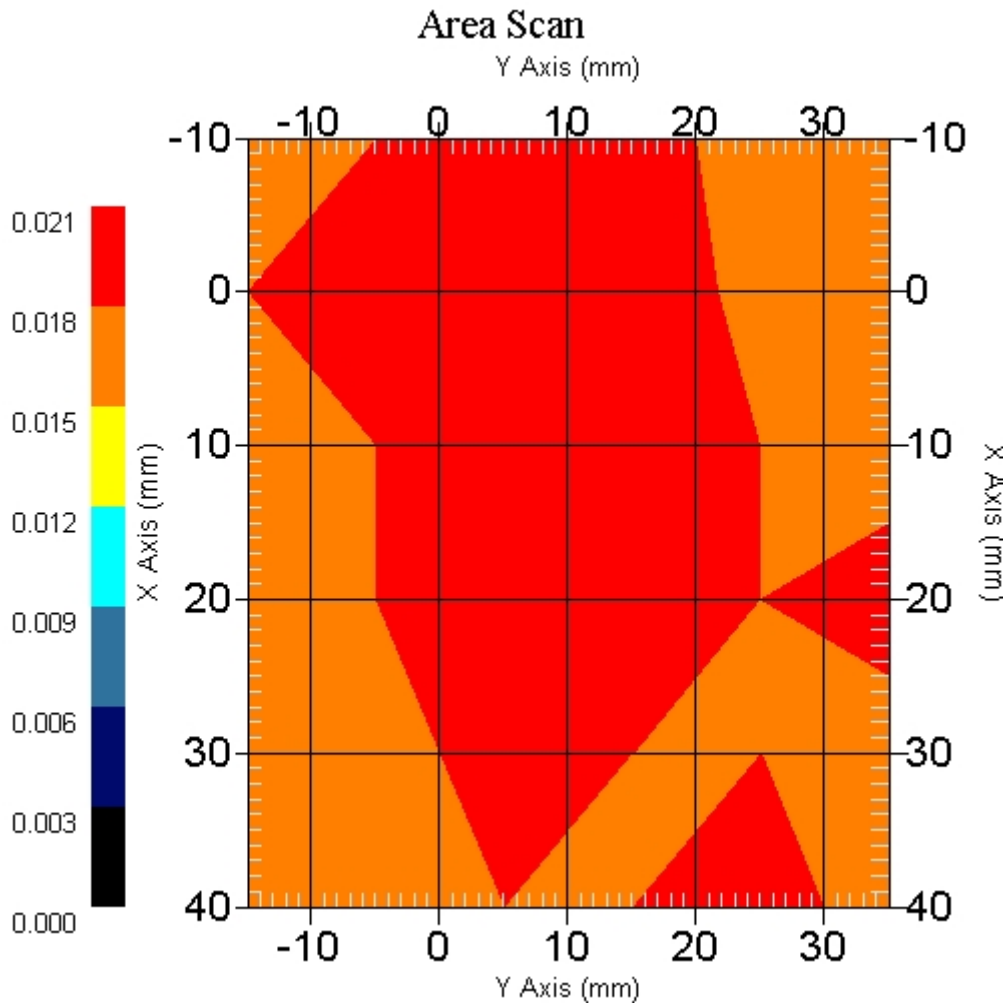


```
1 gram SAR value    : 0.020 W/kg
10 gram SAR value   : 0.022 W/kg
Area Scan Peak SAR  : 0.021 W/kg
Zoom Scan Peak SAR  : 0.010 W/kg
```


*This report shall not be reproduced except in full without the written approval of RF Exposure Lab, LLC.*

# SAR Test Report

By Operator : Jay
Measurement Date : 12-Apr-2006
Starting Time : 12-Apr-2006 02:01:00 PM
End Time : 12-Apr-2006 02:40:42 PM
Scanning Time : 2382 secs

Product Data
Device Name : CardioNet
Serial No. : 10061
Type : Std Form Cell Phone
Model : 100-0023-01
Frequency : 900.00 MHz
Max. Transmit Pwr : 0.032 W
Drift Time : 0 min(s)
Length : 120 mm
Width : 62 mm
Depth : 24 mm
Antenna Type : Internal
Orientation : 15° Tilt
Power Drift-Start : 0.019 W/kg
Power Drift-Finish: 0.021 W/kg
Power Drift (%) : 6.552

Phantom Data
Name : APREL-SAM Right Ear
Type : SAM-Right
Size (mm) : 280 x 280 x 280
Serial No. : User Define
Location : Right
Description : Polygon Right

Tissue Data
Type : HEAD
Serial No. : 900
Frequency : 900.00 MHz
Last Calib. Date : 12-Apr-2006
Temperature : 20.00 °C
Ambient Temp. : 22.00 °C
Humidity : 43.00 RH%
Epsilon : 40.23 F/m
Sigma : 0.96 S/m
Density : 1000.00 kg/cu. m

Probe Data
Name : Probe 215 - RFEL
Model : E020
Type : E-Field Triangle
Serial No. : 215
Last Calib. Date : 10-Jun-2005
Frequency : 835.00 MHz
Duty Cycle Factor: 1
Conversion Factor: 5.49
Probe Sensitivity: 1.20 1.20 1.20 $\mu V/(V/m)^2$
Compression Point: 95.00 mV
Offset : 1.56 mm

© 2005 RF Exposure Lab, LLC

*This report shall not be reproduced except in full without the written approval of RF Exposure Lab, LLC.*

```
Measurement Data
Crest Factor      : 1
Scan Type         : Complete
Tissue Temp.      : 20.00 °C
Ambient Temp.     : 22.00 °C
Set-up Date       : 12-Apr-2006
Set-up Time       : 10:17:17 AM
Area Scan         : 6x6x1 : Measurement x=10mm, y=10mm, z=4mm
Zoom Scan         : 5x5x8 : Measurement x=8mm, y=8mm, z=4mm

Other Data
DUT Position      : 15° Tilt
Separation        : 0
Channel           : Mid - 15
```

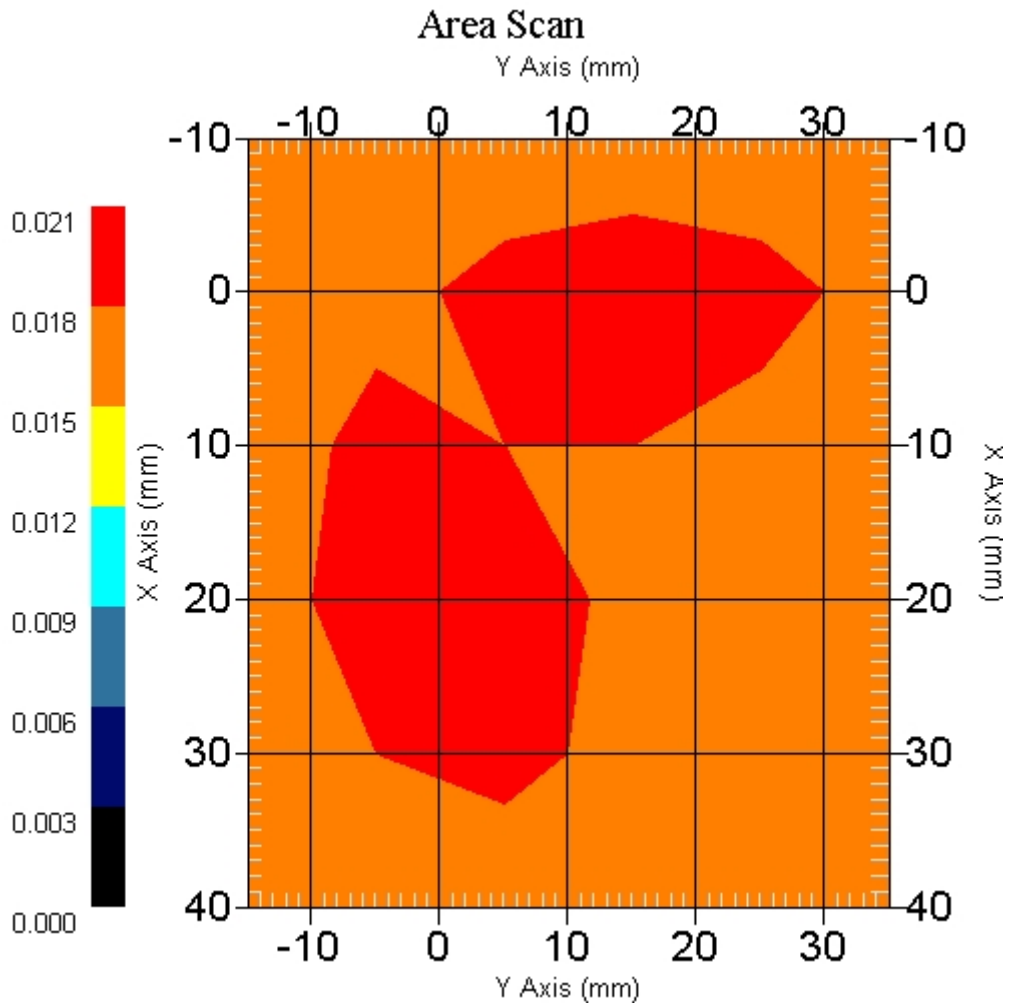


```
1 gram SAR value    : 0.023 W/kg
10 gram SAR value   : 0.020 W/kg
Area Scan Peak SAR  : 0.020 W/kg
Zoom Scan Peak SAR  : 0.020 W/kg
```


*This report shall not be reproduced except in full without the written approval of RF Exposure Lab, LLC.*

# SAR Test Report

By Operator : Jay
Measurement Date : 12-Apr-2006
Starting Time : 12-Apr-2006 12:54:01 PM
End Time : 12-Apr-2006 01:25:45 PM
Scanning Time : 1904 secs

Product Data
Device Name : CardioNet
Serial No. : 10061
Type : Std Form Cell Phone
Model : 100-0023-01
Frequency : 900.00 MHz
Max. Transmit Pwr : 0.032 W
Drift Time : 0 min(s)
Length : 120 mm
Width : 62 mm
Depth : 24 mm
Antenna Type : Internal
Orientation : 15° Tilt
Power Drift-Start : 0.019 W/kg
Power Drift-Finish: 0.017 W/kg
Power Drift (%) : -9.966

Phantom Data
Name : APREL-SAM Right Ear
Type : SAM-Right
Size (mm) : 280 x 280 x 280
Serial No. : User Define
Location : Right
Description : Polygon Right

Tissue Data
Type : HEAD
Serial No. : 900
Frequency : 900.00 MHz
Last Calib. Date : 12-Apr-2006
Temperature : 20.00 °C
Ambient Temp. : 22.00 °C
Humidity : 43.00 RH%
Epsilon : 40.23 F/m
Sigma : 0.96 S/m
Density : 1000.00 kg/cu. m

Probe Data
Name : Probe 215 - RFEL
Model : E020
Type : E-Field Triangle
Serial No. : 215
Last Calib. Date : 10-Jun-2005
Frequency : 835.00 MHz
Duty Cycle Factor: 1
Conversion Factor: 5.49
Probe Sensitivity: 1.20 1.20 1.20 $\mu V/(V/m)^2$
Compression Point: 95.00 mV
Offset : 1.56 mm

© 2005 RF Exposure Lab, LLC

*This report shall not be reproduced except in full without the written approval of RF Exposure Lab, LLC.*

```
Measurement Data
Crest Factor      : 1
Scan Type         : Complete
Tissue Temp.      : 20.00 °C
Ambient Temp.     : 22.00 °C
Set-up Date       : 12-Apr-2006
Set-up Time       : 10:17:17 AM
Area Scan         : 6x6x1 : Measurement x=10mm, y=10mm, z=4mm
Zoom Scan         : 5x5x8 : Measurement x=8mm, y=8mm, z=4mm

Other Data
DUT Position      : 15° Tilt
Separation        : 0
Channel           : High - 31
```

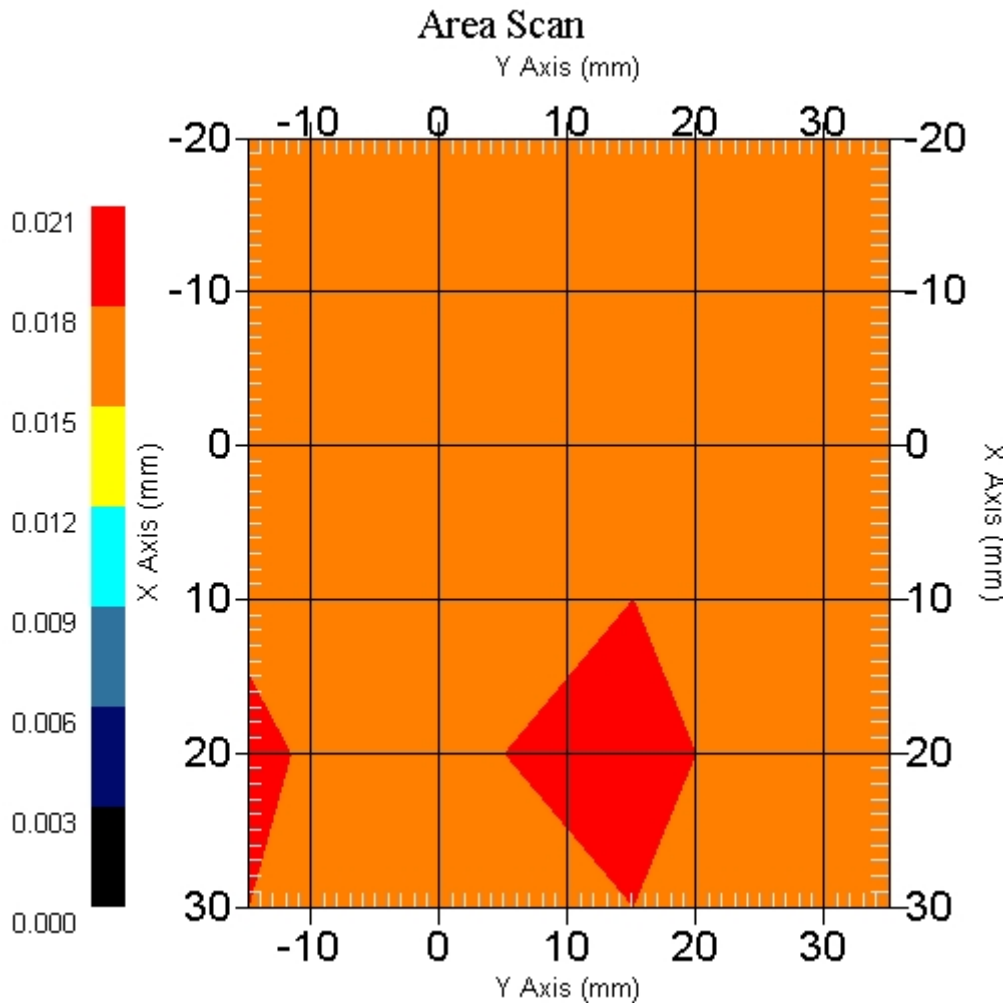


```
1 gram SAR value    : 0.019 W/kg
10 gram SAR value   : 0.018 W/kg
Area Scan Peak SAR  : 0.019 W/kg
Zoom Scan Peak SAR  : 0.020 W/kg
```


*This report shall not be reproduced except in full without the written approval of RF Exposure Lab, LLC.*

# SAR Test Report

By Operator : Jay
Measurement Date : 12-Apr-2006
Starting Time : 12-Apr-2006 04:09:57 PM
End Time : 12-Apr-2006 04:49:26 PM
Scanning Time : 2369 secs

Product Data
Device Name : CardioNet
Serial No. : 10061
Type : Std Form Cell Phone
Model : 100-0023-01
Frequency : 900.00 MHz
Max. Transmit Pwr : 0.032 W
Drift Time : 0 min(s)
Length : 120 mm
Width : 62 mm
Depth : 24 mm
Antenna Type : Internal
Orientation : Touch
Power Drift-Start : 0.020 W/kg
Power Drift-Finish: 0.020 W/kg
Power Drift (%) : -2.372

Phantom Data
Name : APREL-SAM Right Ear
Type : SAM-Right
Size (mm) : 280 x 280 x 280
Serial No. : User Define
Location : Right
Description : Polygon Right

Tissue Data
Type : HEAD
Serial No. : 900
Frequency : 900.00 MHz
Last Calib. Date : 12-Apr-2006
Temperature : 20.00 °C
Ambient Temp. : 22.00 °C
Humidity : 43.00 RH%
Epsilon : 40.23 F/m
Sigma : 0.96 S/m
Density : 1000.00 kg/cu. m

Probe Data
Name : Probe 215 - RFEL
Model : E020
Type : E-Field Triangle
Serial No. : 215
Last Calib. Date : 10-Jun-2005
Frequency : 835.00 MHz
Duty Cycle Factor: 1
Conversion Factor: 5.49
Probe Sensitivity: 1.20 1.20 1.20 $\mu V/(V/m)^2$
Compression Point: 95.00 mV
Offset : 1.56 mm

© 2005 RF Exposure Lab, LLC

*This report shall not be reproduced except in full without the written approval of RF Exposure Lab, LLC.*

```
Measurement Data
Crest Factor      : 1
Scan Type         : Complete
Tissue Temp.      : 20.00 °C
Ambient Temp.     : 22.00 °C
Set-up Date       : 12-Apr-2006
Set-up Time       : 10:17:17 AM
Area Scan         : 6x6x1 : Measurement x=10mm, y=10mm, z=4mm
Zoom Scan         : 5x5x8 : Measurement x=8mm, y=8mm, z=4mm

Other Data
DUT Position      : Touch
Separation        : 0
Channel           : High - 31
```

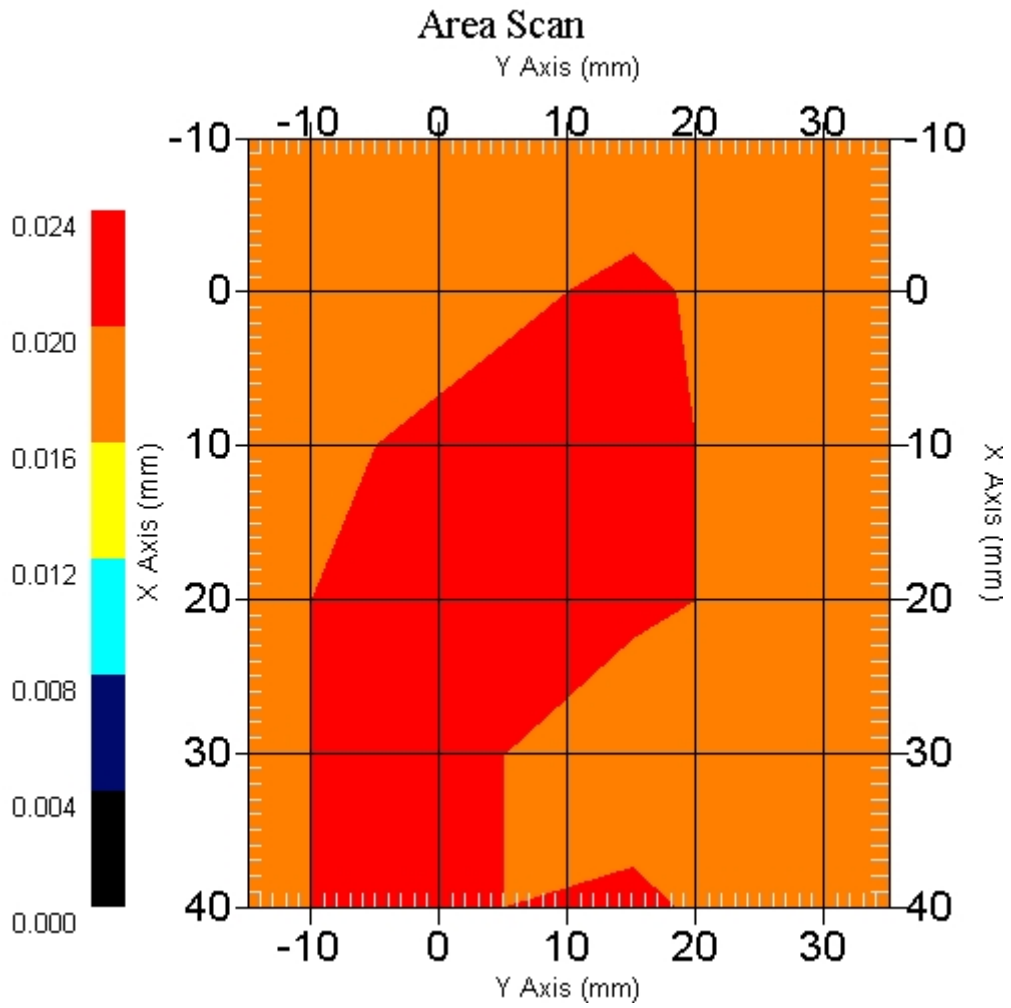


```
1 gram SAR value    : 0.026 W/kg
10 gram SAR value   : 0.022 W/kg
Area Scan Peak SAR  : 0.022 W/kg
Zoom Scan Peak SAR  : 0.030 W/kg
```


*This report shall not be reproduced except in full without the written approval of RF Exposure Lab, LLC.*

# SAR Test Report

By Operator : Jay
Measurement Date : 13-Apr-2006
Starting Time : 13-Apr-2006 08:24:10 AM
End Time : 13-Apr-2006 08:50:30 AM
Scanning Time : 1580 secs

Product Data
Device Name : CardioNet
Serial No. : 10061
Type : Std Form Cell Phone
Model : 100-0023-01
Frequency : 900.00 MHz
Max. Transmit Pwr : 0.032 W
Drift Time : 0 min(s)
Length : 120 mm
Width : 62 mm
Depth : 24 mm
Antenna Type : Internal
Orientation : Touch
Power Drift-Start : 0.024 W/kg
Power Drift-Finish: 0.023 W/kg
Power Drift (%) : -2.435

Phantom Data
Name : APREL-SAM Left Ear
Type : SAM-Left
Size (mm) : 280 x 280 x 280
Serial No. : User Define
Location : Left
Description : Polygon Left

Tissue Data
Type : HEAD
Serial No. : 900
Frequency : 900.00 MHz
Last Calib. Date : 13-Apr-2006
Temperature : 20.00 °C
Ambient Temp. : 23.00 °C
Humidity : 42.00 RH%
Epsilon : 40.80 F/m
Sigma : 0.97 S/m
Density : 1000.00 kg/cu. m

Probe Data
Name : Probe 215 - RFEL
Model : E020
Type : E-Field Triangle
Serial No. : 215
Last Calib. Date : 10-Jun-2005
Frequency : 835.00 MHz
Duty Cycle Factor: 1
Conversion Factor: 5.49
Probe Sensitivity: 1.20 1.20 1.20 $\mu V/(V/m)^2$
Compression Point: 95.00 mV
Offset : 1.56 mm

© 2005 RF Exposure Lab, LLC

*This report shall not be reproduced except in full without the written approval of RF Exposure Lab, LLC.*

```
Measurement Data
Crest Factor      : 1
Scan Type         : Complete
Tissue Temp.      : 20.00 °C
Ambient Temp.     : 22.00 °C
Set-up Date       : 13-Apr-2006
Set-up Time       : 10:17:17 AM
Area Scan         : 7x7x1 : Measurement x=10mm, y=10mm, z=4mm
Zoom Scan         : 5x5x8 : Measurement x=8mm, y=8mm, z=4mm

Other Data
DUT Position      : Touch
Separation        : 0
Channel           : Low - 0
```

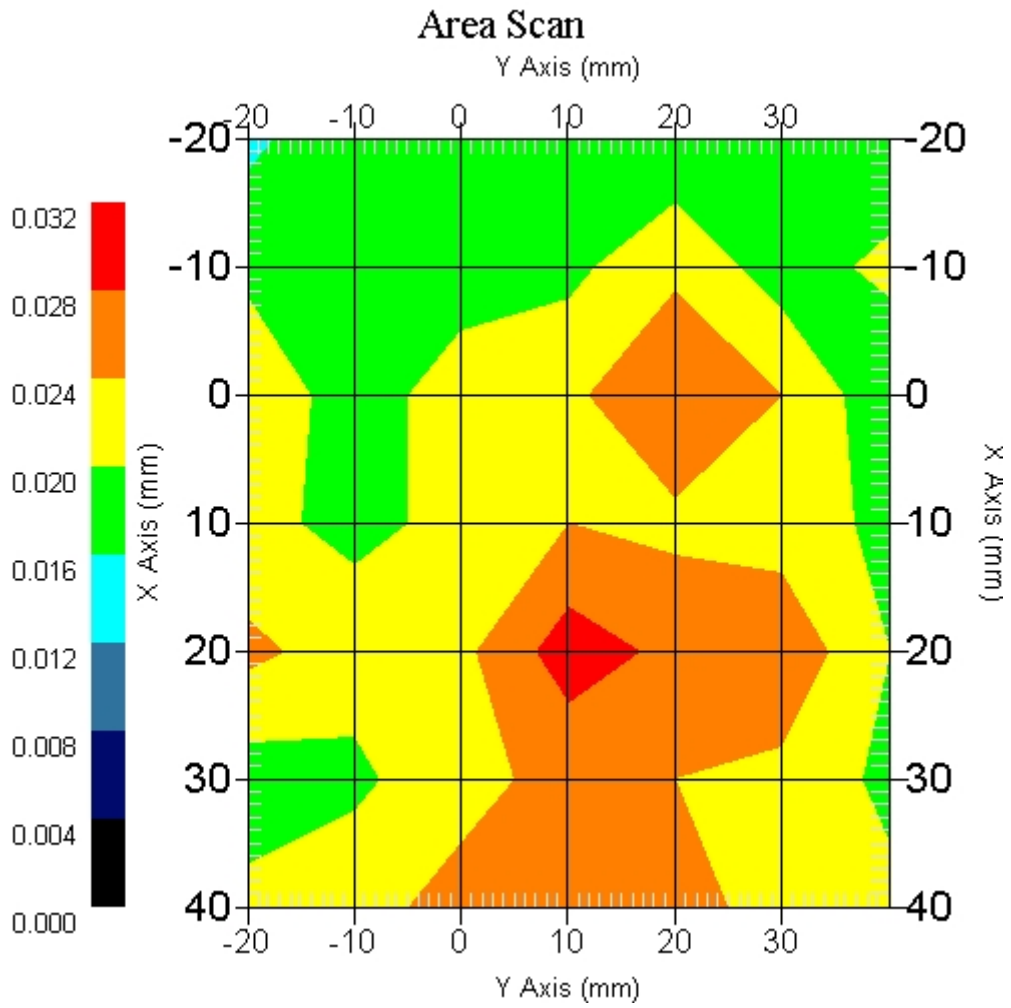


```
1 gram SAR value    : 0.036 W/kg
10 gram SAR value   : 0.044 W/kg
Area Scan Peak SAR  : 0.030 W/kg
Zoom Scan Peak SAR  : 0.030 W/kg
```


*This report shall not be reproduced except in full without the written approval of RF Exposure Lab, LLC.*

# SAR Test Report

By Operator : Jay
Measurement Date : 13-Apr-2006
Starting Time : 13-Apr-2006 08:55:07 AM
End Time : 13-Apr-2006 09:13:38 AM
Scanning Time : 1111 secs

Product Data
Device Name : CardioNet
Serial No. : 10061
Type : Std Form Cell Phone
Model : 100-0023-01
Frequency : 900.00 MHz
Max. Transmit Pwr : 0.032 W
Drift Time : 0 min(s)
Length : 120 mm
Width : 62 mm
Depth : 24 mm
Antenna Type : Internal
Orientation : Touch
Power Drift-Start : 0.024 W/kg
Power Drift-Finish: 0.024 W/kg
Power Drift (%) : 3.167

Phantom Data
Name : APREL-SAM Left Ear
Type : SAM-Left
Size (mm) : 280 x 280 x 280
Serial No. : User Define
Location : Left
Description : Polygon Left

Tissue Data
Type : HEAD
Serial No. : 900
Frequency : 900.00 MHz
Last Calib. Date : 13-Apr-2006
Temperature : 20.00 °C
Ambient Temp. : 23.00 °C
Humidity : 42.00 RH%
Epsilon : 40.80 F/m
Sigma : 0.97 S/m
Density : 1000.00 kg/cu. m

Probe Data
Name : Probe 215 - RFEL
Model : E020
Type : E-Field Triangle
Serial No. : 215
Last Calib. Date : 10-Jun-2005
Frequency : 835.00 MHz
Duty Cycle Factor: 1
Conversion Factor: 5.49
Probe Sensitivity: 1.20 1.20 1.20 $\mu V/(V/m)^2$
Compression Point: 95.00 mV
Offset : 1.56 mm

© 2005 RF Exposure Lab, LLC

*This report shall not be reproduced except in full without the written approval of RF Exposure Lab, LLC.*

```
Measurement Data
Crest Factor      : 1
Scan Type         : Complete
Tissue Temp.      : 20.00 °C
Ambient Temp.     : 22.00 °C
Set-up Date       : 13-Apr-2006
Set-up Time       : 10:17:17 AM
Area Scan         : 7x7x1 : Measurement x=10mm, y=10mm, z=4mm
Zoom Scan         : 5x5x8 : Measurement x=8mm, y=8mm, z=4mm

Other Data
DUT Position      : Touch
Separation        : 0
Channel           : Mid - 15
```

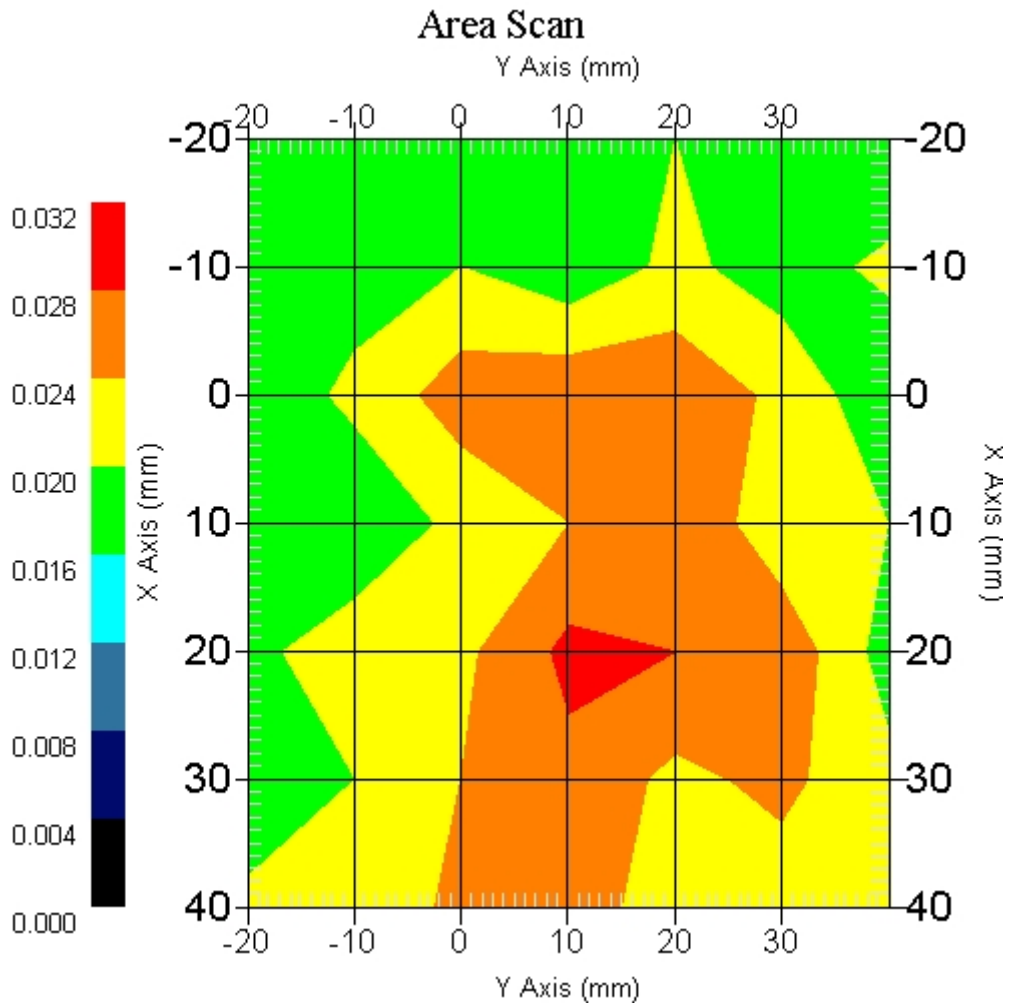


```
1 gram SAR value    : 0.029 W/kg
10 gram SAR value   : 0.023 W/kg
Area Scan Peak SAR  : 0.029 W/kg
Zoom Scan Peak SAR  : 0.030 W/kg
```


*This report shall not be reproduced except in full without the written approval of RF Exposure Lab, LLC.*

# SAR Test Report

By Operator : Jay
Measurement Date : 13-Apr-2006
Starting Time : 13-Apr-2006 09:38:40 AM
End Time : 13-Apr-2006 10:20:58 AM
Scanning Time : 2538 secs

Product Data
Device Name : CardioNet
Serial No. : 10061
Type : Std Form Cell Phone
Model : 100-0023-01
Frequency : 900.00 MHz
Max. Transmit Pwr : 0.032 W
Drift Time : 0 min(s)
Length : 120 mm
Width : 62 mm
Depth : 24 mm
Antenna Type : Internal
Orientation : Touch
Power Drift-Start : 0.025 W/kg
Power Drift-Finish: 0.020 W/kg
Power Drift (%) : -18.347

Phantom Data
Name : APREL-SAM Left Ear
Type : SAM-Left
Size (mm) : 280 x 280 x 280
Serial No. : User Define
Location : Left
Description : Polygon Left

Tissue Data
Type : HEAD
Serial No. : 900
Frequency : 900.00 MHz
Last Calib. Date : 13-Apr-2006
Temperature : 20.00 °C
Ambient Temp. : 23.00 °C
Humidity : 42.00 RH%
Epsilon : 40.80 F/m
Sigma : 0.97 S/m
Density : 1000.00 kg/cu. m

Probe Data
Name : Probe 215 - RFEL
Model : E020
Type : E-Field Triangle
Serial No. : 215
Last Calib. Date : 10-Jun-2005
Frequency : 835.00 MHz
Duty Cycle Factor: 1
Conversion Factor: 5.49
Probe Sensitivity: 1.20 1.20 1.20 $\mu V/(V/m)^2$
Compression Point: 95.00 mV
Offset : 1.56 mm

© 2005 RF Exposure Lab, LLC

*This report shall not be reproduced except in full without the written approval of RF Exposure Lab, LLC.*

```
Measurement Data
Crest Factor      : 1
Scan Type         : Complete
Tissue Temp.      : 20.00 °C
Ambient Temp.     : 22.00 °C
Set-up Date       : 13-Apr-2006
Set-up Time       : 10:17:17 AM
Area Scan         : 7x7x1 : Measurement x=10mm, y=10mm, z=4mm
Zoom Scan         : 5x5x8 : Measurement x=8mm, y=8mm, z=4mm

Other Data
DUT Position      : Touch
Separation        : 0
Channel           : High - 31
```

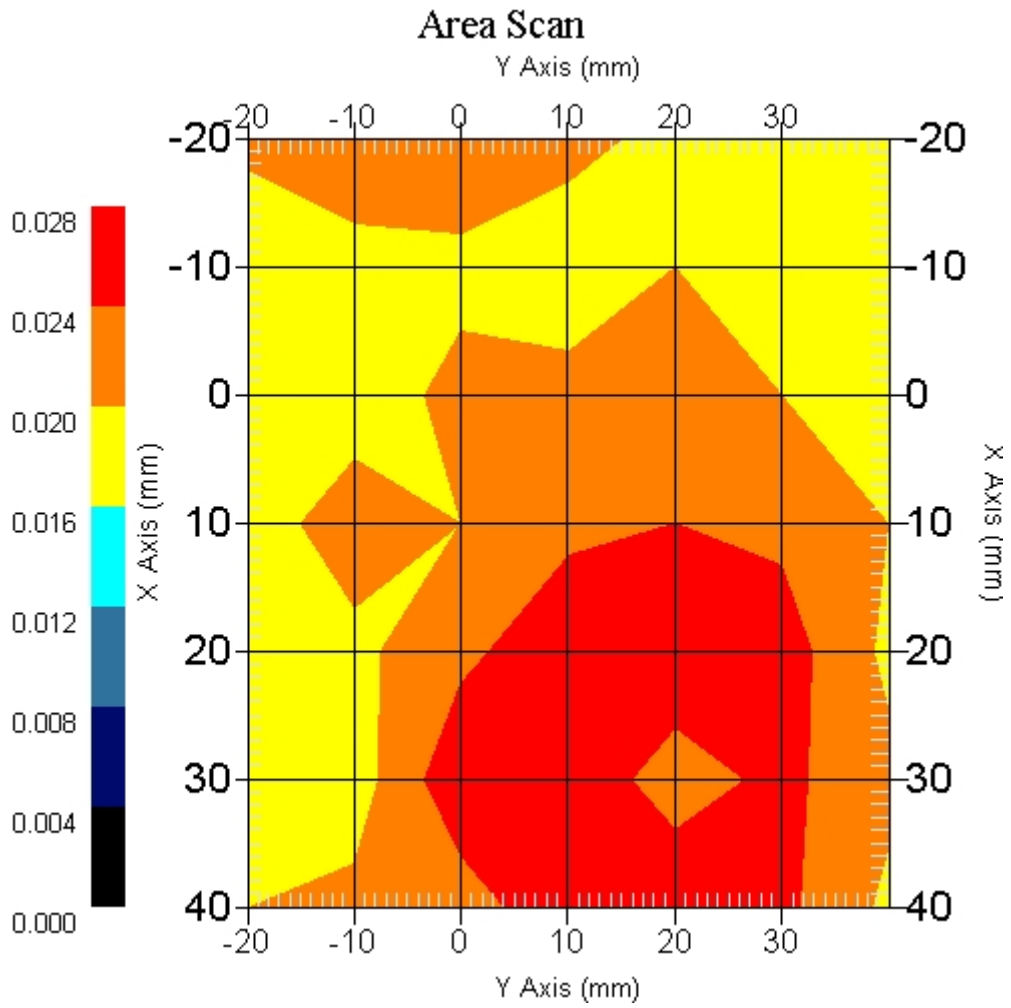


```
1 gram SAR value    : 0.029 W/kg
10 gram SAR value   : 0.025 W/kg
Area Scan Peak SAR  : 0.027 W/kg
Zoom Scan Peak SAR  : 0.020 W/kg
```


*This report shall not be reproduced except in full without the written approval of RF Exposure Lab, LLC.*

# SAR Test Report

By Operator : Jay
Measurement Date : 13-Apr-2006
Starting Time : 13-Apr-2006 12:09:34 PM
End Time : 13-Apr-2006 01:07:57 PM
Scanning Time : 3503 secs

Product Data
Device Name : CardioNet
Serial No. : 10061
Type : Std Form Cell Phone
Model : 100-0023-01
Frequency : 900.00 MHz
Max. Transmit Pwr : 0.032 W
Drift Time : 0 min(s)
Length : 120 mm
Width : 62 mm
Depth : 24 mm
Antenna Type : Internal
Orientation : 15° Tilt
Power Drift-Start : 0.030 W/kg
Power Drift-Finish: 0.024 W/kg
Power Drift (%) : -21.355

Phantom Data
Name : APREL-SAM Left Ear
Type : SAM-Left
Size (mm) : 280 x 280 x 280
Serial No. : User Define
Location : Left
Description : Polygon Left

Tissue Data
Type : HEAD
Serial No. : 900
Frequency : 900.00 MHz
Last Calib. Date : 13-Apr-2006
Temperature : 20.00 °C
Ambient Temp. : 23.00 °C
Humidity : 42.00 RH%
Epsilon : 40.80 F/m
Sigma : 0.97 S/m
Density : 1000.00 kg/cu. m

Probe Data
Name : Probe 215 - RFEL
Model : E020
Type : E-Field Triangle
Serial No. : 215
Last Calib. Date : 10-Jun-2005
Frequency : 835.00 MHz
Duty Cycle Factor: 1
Conversion Factor: 5.49
Probe Sensitivity: 1.20 1.20 1.20 $\mu V/(V/m)^2$
Compression Point: 95.00 mV
Offset : 1.56 mm

© 2005 RF Exposure Lab, LLC

*This report shall not be reproduced except in full without the written approval of RF Exposure Lab, LLC.*

```
Measurement Data
Crest Factor      : 1
Scan Type         : Complete
Tissue Temp.      : 20.00 °C
Ambient Temp.     : 22.00 °C
Set-up Date       : 13-Apr-2006
Set-up Time       : 10:17:17 AM
Area Scan         : 7x7x1 : Measurement x=10mm, y=10mm, z=4mm
Zoom Scan         : 5x5x8 : Measurement x=8mm, y=8mm, z=4mm

Other Data
DUT Position      : 15° Tilt
Separation        : 0
Channel           : Low - 0
```

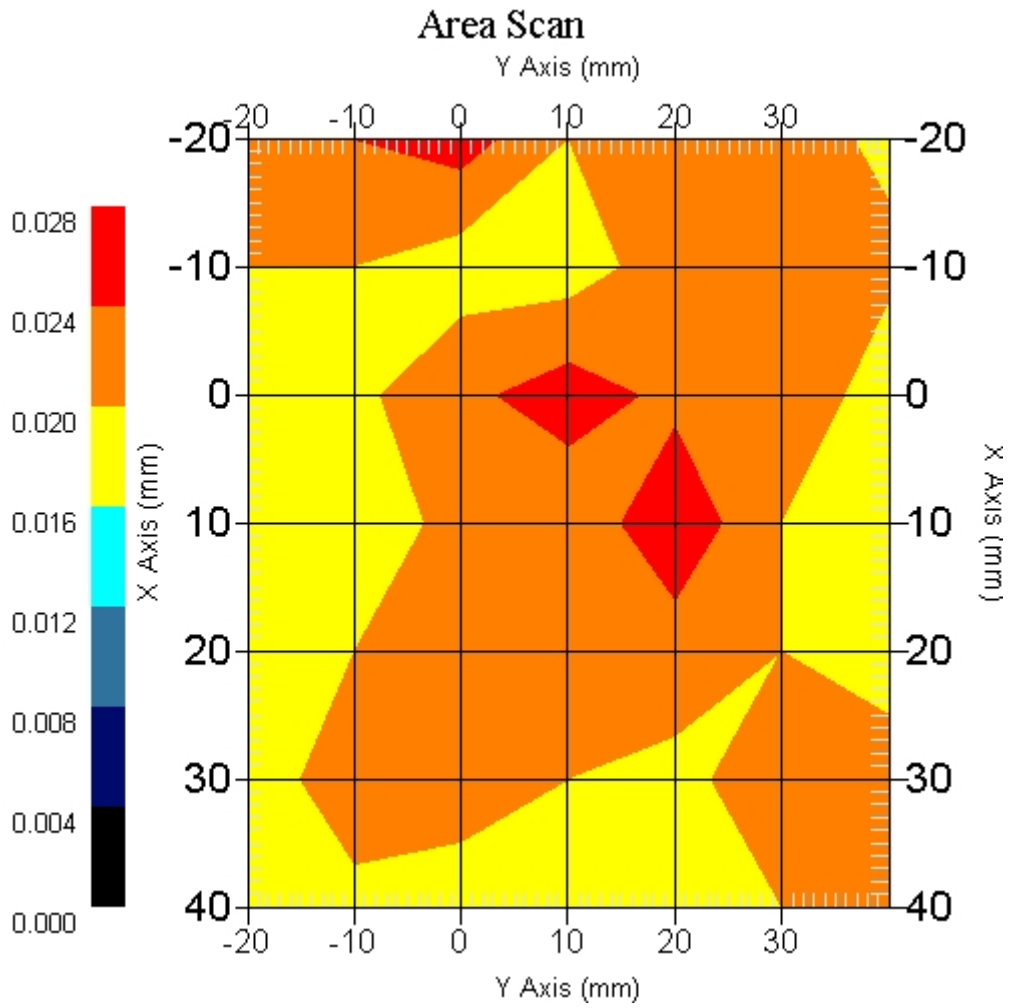


```
1 gram SAR value    : 0.044 W/kg
10 gram SAR value   : 0.053 W/kg
Area Scan Peak SAR  : 0.027 W/kg
Zoom Scan Peak SAR  : 0.040 W/kg
```


*This report shall not be reproduced except in full without the written approval of RF Exposure Lab, LLC.*

# SAR Test Report

By Operator : Jay
Measurement Date : 13-Apr-2006
Starting Time : 13-Apr-2006 11:32:41 AM
End Time : 13-Apr-2006 12:06:59 PM
Scanning Time : 2058 secs

Product Data
Device Name : CardioNet
Serial No. : 10061
Type : Std Form Cell Phone
Model : 100-0023-01
Frequency : 900.00 MHz
Max. Transmit Pwr : 0.032 W
Drift Time : 0 min(s)
Length : 120 mm
Width : 62 mm
Depth : 24 mm
Antenna Type : Internal
Orientation : 15° Tilt
Power Drift-Start : 0.029 W/kg
Power Drift-Finish: 0.021 W/kg
Power Drift (%) : -29.048

Phantom Data
Name : APREL-SAM Left Ear
Type : SAM-Left
Size (mm) : 280 x 280 x 280
Serial No. : User Define
Location : Left
Description : Polygon Left

Tissue Data
Type : HEAD
Serial No. : 900
Frequency : 900.00 MHz
Last Calib. Date : 13-Apr-2006
Temperature : 20.00 °C
Ambient Temp. : 23.00 °C
Humidity : 42.00 RH%
Epsilon : 40.80 F/m
Sigma : 0.97 S/m
Density : 1000.00 kg/cu. m

Probe Data
Name : Probe 215 - RFEL
Model : E020
Type : E-Field Triangle
Serial No. : 215
Last Calib. Date : 10-Jun-2005
Frequency : 835.00 MHz
Duty Cycle Factor: 1
Conversion Factor: 5.49
Probe Sensitivity: 1.20 1.20 1.20 $\mu V/(V/m)^2$
Compression Point: 95.00 mV
Offset : 1.56 mm

© 2005 RF Exposure Lab, LLC

*This report shall not be reproduced except in full without the written approval of RF Exposure Lab, LLC.*

```
Measurement Data
Crest Factor      : 1
Scan Type         : Complete
Tissue Temp.      : 20.00 °C
Ambient Temp.     : 22.00 °C
Set-up Date       : 13-Apr-2006
Set-up Time       : 10:17:17 AM
Area Scan         : 7x7x1 : Measurement x=10mm, y=10mm, z=4mm
Zoom Scan         : 5x5x8 : Measurement x=8mm, y=8mm, z=4mm

Other Data
DUT Position      : 15° Tilt
Separation        : 0
Channel           : Mid - 15
```

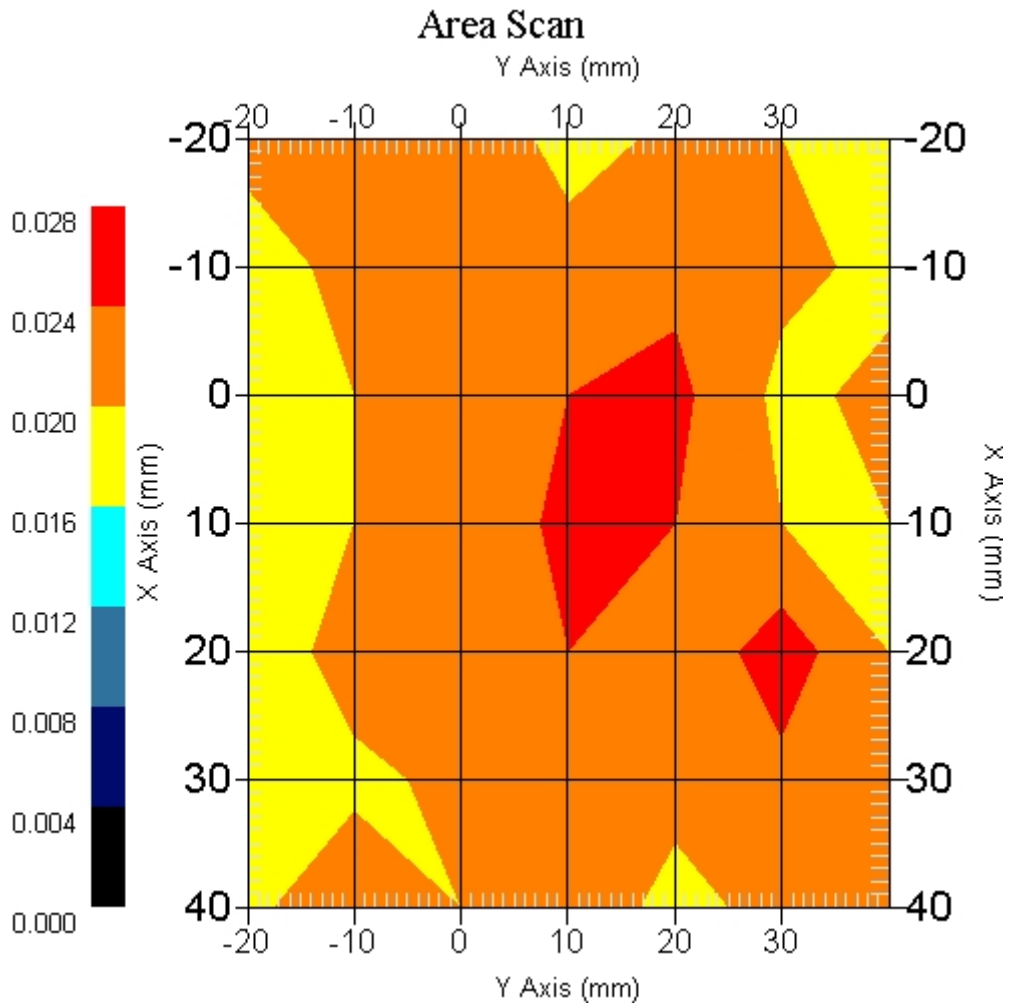


```
1 gram SAR value    : 0.031 W/kg
10 gram SAR value   : 0.033 W/kg
Area Scan Peak SAR  : 0.026 W/kg
Zoom Scan Peak SAR  : 0.030 W/kg
```


*This report shall not be reproduced except in full without the written approval of RF Exposure Lab, LLC.*

# SAR Test Report

By Operator : Jay
Measurement Date : 13-Apr-2006
Starting Time : 13-Apr-2006 10:23:35 AM
End Time : 13-Apr-2006 11:30:19 AM
Scanning Time : 4004 secs

Product Data
Device Name : CardioNet
Serial No. : 10061
Type : Std Form Cell Phone
Model : 100-0023-01
Frequency : 900.00 MHz
Max. Transmit Pwr : 0.032 W
Drift Time : 0 min(s)
Length : 120 mm
Width : 62 mm
Depth : 24 mm
Antenna Type : Internal
Orientation : 15° Tilt
Power Drift-Start : 0.023 W/kg
Power Drift-Finish: 0.024 W/kg
Power Drift (%) : 2.209

Phantom Data
Name : APREL-SAM Left Ear
Type : SAM-Left
Size (mm) : 280 x 280 x 280
Serial No. : User Define
Location : Left
Description : Polygon Left

Tissue Data
Type : HEAD
Serial No. : 900
Frequency : 900.00 MHz
Last Calib. Date : 13-Apr-2006
Temperature : 20.00 °C
Ambient Temp. : 23.00 °C
Humidity : 42.00 RH%
Epsilon : 40.80 F/m
Sigma : 0.97 S/m
Density : 1000.00 kg/cu. m

Probe Data
Name : Probe 215 - RFEL
Model : E020
Type : E-Field Triangle
Serial No. : 215
Last Calib. Date : 10-Jun-2005
Frequency : 835.00 MHz
Duty Cycle Factor: 1
Conversion Factor: 5.49
Probe Sensitivity: 1.20 1.20 1.20 $\mu V/(V/m)^2$
Compression Point: 95.00 mV
Offset : 1.56 mm

© 2005 RF Exposure Lab, LLC

*This report shall not be reproduced except in full without the written approval of RF Exposure Lab, LLC.*

```
Measurement Data
Crest Factor      : 1
Scan Type         : Complete
Tissue Temp.      : 20.00 °C
Ambient Temp.     : 22.00 °C
Set-up Date       : 13-Apr-2006
Set-up Time       : 10:17:17 AM
Area Scan         : 7x7x1 : Measurement x=10mm, y=10mm, z=4mm
Zoom Scan         : 5x5x8 : Measurement x=8mm, y=8mm, z=4mm

Other Data
DUT Position      : 15° Tilt
Separation        : 0
Channel           : High - 31
```

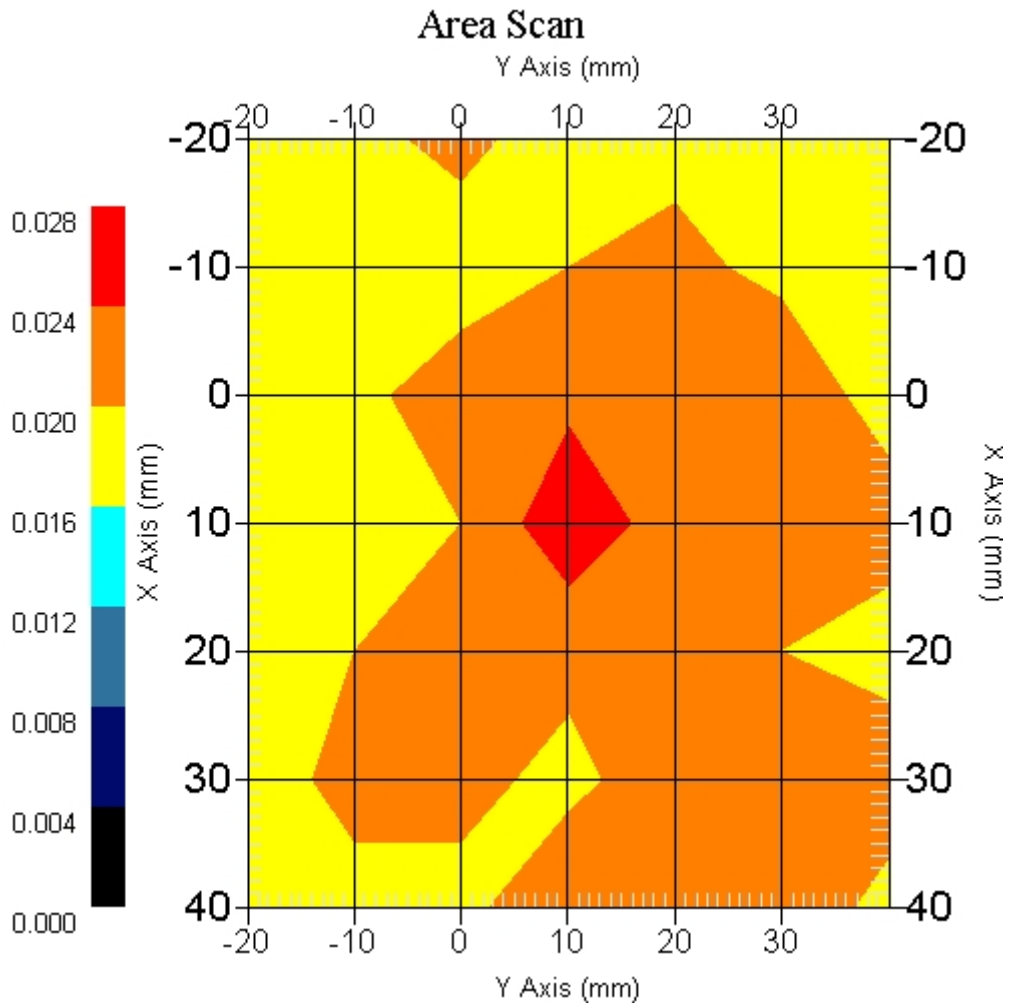


```
1 gram SAR value    : 0.033 W/kg
10 gram SAR value   : 0.024 W/kg
Area Scan Peak SAR  : 0.027 W/kg
Zoom Scan Peak SAR  : 0.040 W/kg
```


*This report shall not be reproduced except in full without the written approval of RF Exposure Lab, LLC.*

# SAR Test Report

By Operator : Jay
Measurement Date : 13-Apr-2006
Starting Time : 13-Apr-2006 01:16:34 PM
End Time : 13-Apr-2006 01:50:52 PM
Scanning Time : 2058 secs

Product Data
Device Name : CardioNet
Serial No. : 10061
Type : Std Form Cell Phone
Model : 100-0023-01
Frequency : 900.00 MHz
Max. Transmit Pwr : 0.032 W
Drift Time : 0 min(s)
Length : 120 mm
Width : 62 mm
Depth : 24 mm
Antenna Type : Internal
Orientation : 15° Tilt
Power Drift-Start : 0.028 W/kg
Power Drift-Finish: 0.022 W/kg
Power Drift (%) : -20.513

Phantom Data
Name : APREL-SAM Left Ear
Type : SAM-Left
Size (mm) : 280 x 280 x 280
Serial No. : User Define
Location : Left
Description : Polygon Left

Tissue Data
Type : HEAD
Serial No. : 900
Frequency : 900.00 MHz
Last Calib. Date : 13-Apr-2006
Temperature : 20.00 °C
Ambient Temp. : 23.00 °C
Humidity : 42.00 RH%
Epsilon : 40.80 F/m
Sigma : 0.97 S/m
Density : 1000.00 kg/cu. m

Probe Data
Name : Probe 215 - RFEL
Model : E020
Type : E-Field Triangle
Serial No. : 215
Last Calib. Date : 10-Jun-2005
Frequency : 835.00 MHz
Duty Cycle Factor: 1
Conversion Factor: 5.49
Probe Sensitivity: 1.20 1.20 1.20 $\mu V/(V/m)^2$
Compression Point: 95.00 mV
Offset : 1.56 mm

© 2005 RF Exposure Lab, LLC

*This report shall not be reproduced except in full without the written approval of RF Exposure Lab, LLC.*

```
Measurement Data
Crest Factor      : 1
Scan Type         : Complete
Tissue Temp.      : 20.00 °C
Ambient Temp.     : 22.00 °C
Set-up Date       : 13-Apr-2006
Set-up Time       : 10:17:17 AM
Area Scan         : 7x7x1 : Measurement x=10mm, y=10mm, z=4mm
Zoom Scan         : 5x5x8 : Measurement x=8mm, y=8mm, z=4mm

Other Data
DUT Position      : 15° Tilt
Separation        : 0
Channel           : Low - 0
```

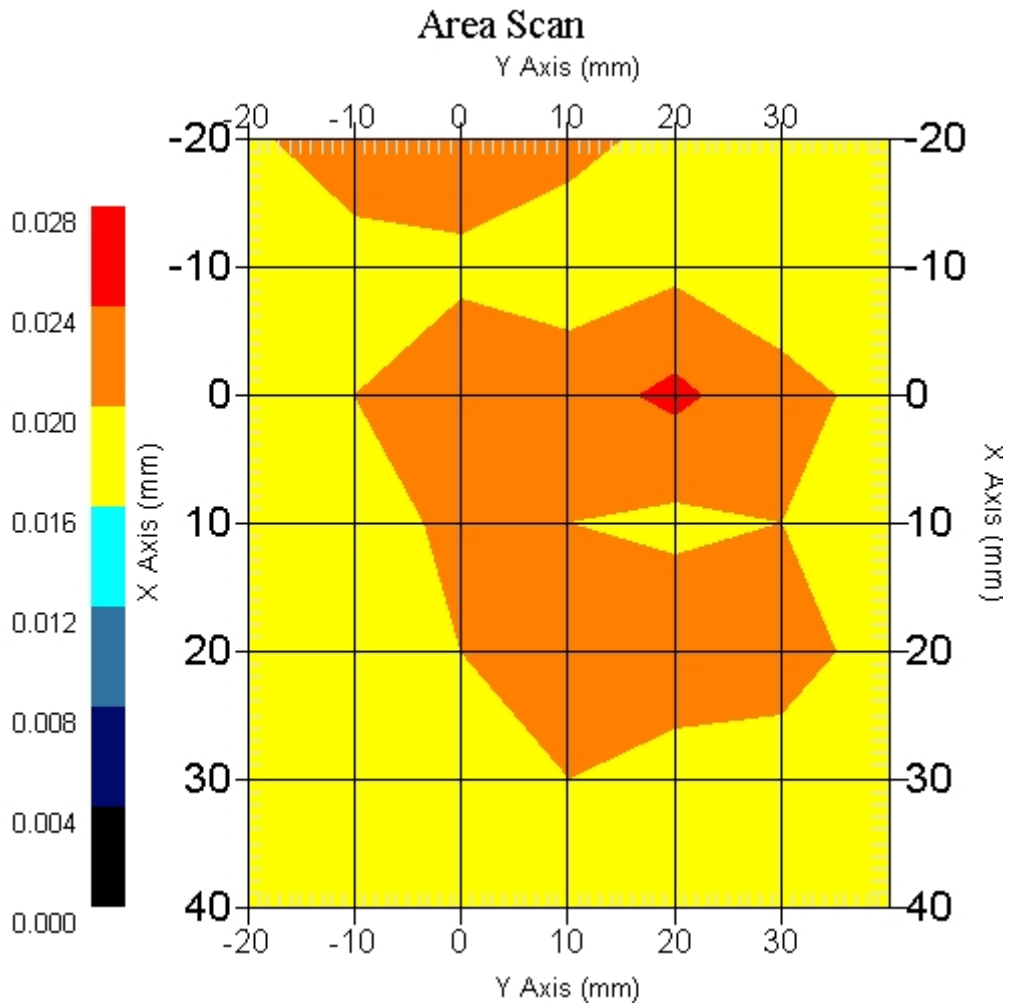


```
1 gram SAR value    : 0.024 W/kg
10 gram SAR value   : 0.020 W/kg
Area Scan Peak SAR  : 0.025 W/kg
Zoom Scan Peak SAR  : 0.030 W/kg
```


*This report shall not be reproduced except in full without the written approval of RF Exposure Lab, LLC.*

# SAR Test Report

By Operator : Jay
Measurement Date : 13-Apr-2006
Starting Time : 13-Apr-2006 02:13:14 PM
End Time : 13-Apr-2006 02:47:02 PM
Scanning Time : 2028 secs

Product Data
Device Name : CardioNet
Serial No. : 10061
Type : Std Form Cell Phone
Model : 100-0023-01
Frequency : 900.00 MHz
Max. Transmit Pwr : 0.032 W
Drift Time : 0 min(s)
Length : 120 mm
Width : 62 mm
Depth : 24 mm
Antenna Type : Internal
Orientation : Rotated Left 90°
Power Drift-Start : 0.028 W/kg
Power Drift-Finish: 0.021 W/kg
Power Drift (%) : -25.129

Phantom Data
Name : APREL-Uni
Type : Uni-Phantom
Size (mm) : 280 x 280 x 200
Serial No. : System Default
Location : Center
Description : Uni-Phantom

Tissue Data
Type : BODY
Serial No. : 900
Frequency : 900.00 MHz
Last Calib. Date : 13-Apr-2006
Temperature : 20.00 °C
Ambient Temp. : 24.00 °C
Humidity : 42.00 RH%
Epsilon : 53.78 F/m
Sigma : 1.02 S/m
Density : 1000.00 kg/cu. m

Probe Data
Name : Probe 215 - RFEL
Model : E020
Type : E-Field Triangle
Serial No. : 215
Last Calib. Date : 10-Jun-2005
Frequency : 835.00 MHz
Duty Cycle Factor: 1
Conversion Factor: 6.07
Probe Sensitivity: 1.20 1.20 1.20 $\mu V/(V/m)^2$
Compression Point: 95.00 mV
Offset : 1.56 mm

© 2005 RF Exposure Lab, LLC

*This report shall not be reproduced except in full without the written approval of RF Exposure Lab, LLC.*

```
Measurement Data
Crest Factor      : 1
Scan Type         : Complete
Tissue Temp.      : 20.00 °C
Ambient Temp.     : 24.00 °C
Set-up Date       : 13-Apr-2006
Set-up Time       : 10:17:17 AM
Area Scan         : 7x7x1 : Measurement x=10mm, y=10mm, z=4mm
Zoom Scan         : 5x5x8 : Measurement x=8mm, y=8mm, z=4mm

Other Data
DUT Position      : Rotated Left 90°
Separation        : 0
Channel           : Low - 0
```

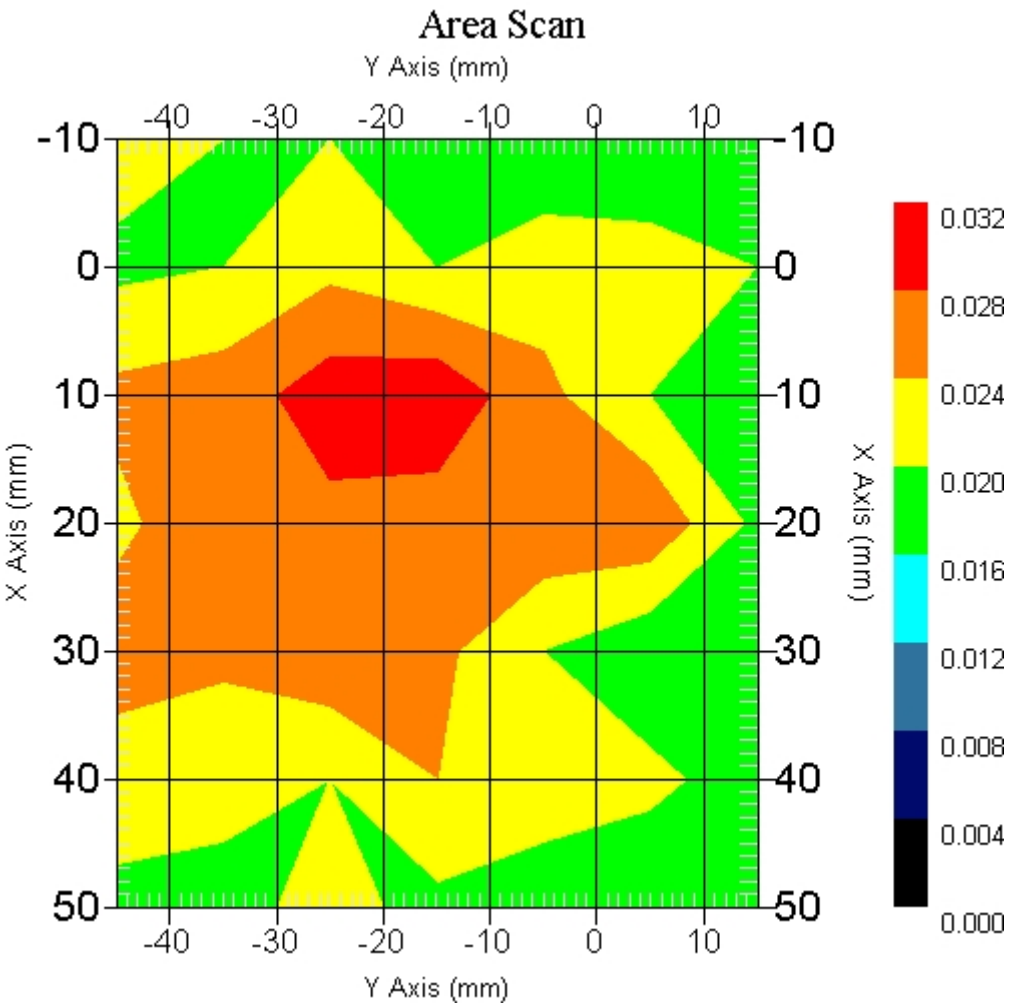


```
1 gram SAR value    : 0.027 W/kg
10 gram SAR value   : 0.022 W/kg
Area Scan Peak SAR  : 0.031 W/kg
Zoom Scan Peak SAR  : 0.010 W/kg
```


*This report shall not be reproduced except in full without the written approval of RF Exposure Lab, LLC.*

# SAR Test Report

By Operator : Jay
Measurement Date : 13-Apr-2006
Starting Time : 13-Apr-2006 02:49:15 PM
End Time : 13-Apr-2006 03:23:08 PM
Scanning Time : 2033 secs

Product Data
Device Name : CardioNet
Serial No. : 10061
Type : Std Form Cell Phone
Model : 100-0023-01
Frequency : 900.00 MHz
Max. Transmit Pwr : 0.032 W
Drift Time : 0 min(s)
Length : 120 mm
Width : 62 mm
Depth : 24 mm
Antenna Type : Internal
Orientation : Rotated Left 90°
Power Drift-Start : 0.023 W/kg
Power Drift-Finish: 0.019 W/kg
Power Drift (%) : -18.758

Phantom Data
Name : APREL-Uni
Type : Uni-Phantom
Size (mm) : 280 x 280 x 200
Serial No. : System Default
Location : Center
Description : Uni-Phantom

Tissue Data
Type : BODY
Serial No. : 900
Frequency : 900.00 MHz
Last Calib. Date : 13-Apr-2006
Temperature : 20.00 °C
Ambient Temp. : 24.00 °C
Humidity : 42.00 RH%
Epsilon : 53.78 F/m
Sigma : 1.02 S/m
Density : 1000.00 kg/cu. m

Probe Data
Name : Probe 215 - RFEL
Model : E020
Type : E-Field Triangle
Serial No. : 215
Last Calib. Date : 10-Jun-2005
Frequency : 835.00 MHz
Duty Cycle Factor: 1
Conversion Factor: 6.07
Probe Sensitivity: 1.20 1.20 1.20 $\mu V/(V/m)^2$
Compression Point: 95.00 mV
Offset : 1.56 mm

© 2005 RF Exposure Lab, LLC

*This report shall not be reproduced except in full without the written approval of RF Exposure Lab, LLC.*

```
Measurement Data
Crest Factor      : 1
Scan Type         : Complete
Tissue Temp.      : 20.00 °C
Ambient Temp.     : 24.00 °C
Set-up Date       : 13-Apr-2006
Set-up Time       : 10:17:17 AM
Area Scan         : 7x7x1 : Measurement x=10mm, y=10mm, z=4mm
Zoom Scan         : 5x5x8 : Measurement x=8mm, y=8mm, z=4mm

Other Data
DUT Position      : Rotated Left 90°
Separation        : 0
Channel           : Mid - 15
```

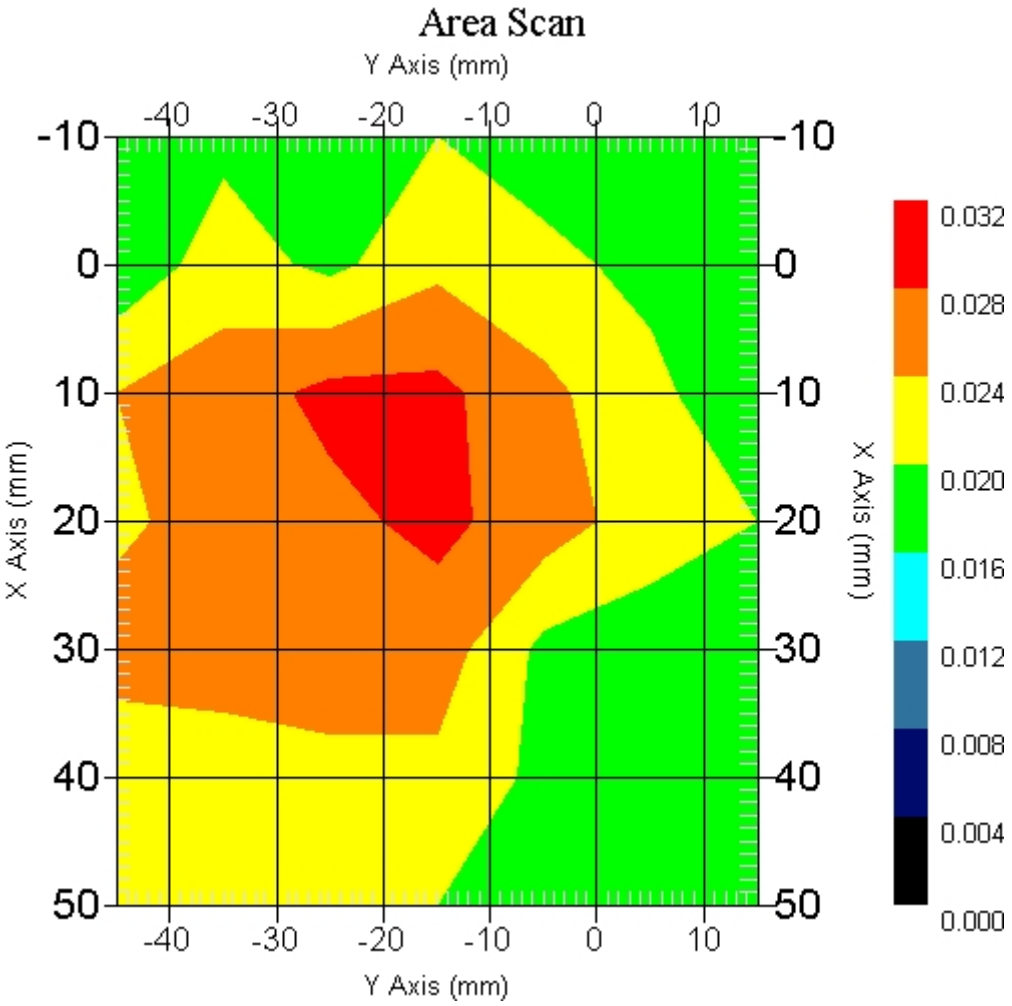


```
1 gram SAR value    : 0.029 W/kg
10 gram SAR value   : 0.024 W/kg
Area Scan Peak SAR  : 0.029 W/kg
Zoom Scan Peak SAR  : 0.040 W/kg
```


*This report shall not be reproduced except in full without the written approval of RF Exposure Lab, LLC.*