


# ENGINEERING TEST REPORT



**V-STATION, A, G, R**  
**Model No.: V-STN, A, G, R**

**FCC ID: QC4-VSTNAGR**

*Applicant:*

**Bioscrypt, Inc.**  
505 Cochrane Drive  
Markham, Ontario  
Canada L3R 8E3

*In Accordance With*

**Federal Communications Commission (FCC)**  
**Part 15, Subpart C, Sec. 15.225**  
**Unlicensed Low Power Transmitters operating in the**  
**frequency band 13.110-14.010 MHz.**

**UltraTech's File No.: MYT-094F15C225**

This Test report is Issued under the Authority of  
Tri M. Luu, Professional Engineer,  
Vice President of Engineering  
UltraTech Group of Labs



Date: December 8, 2006

Report Prepared by: Dharmajit Solanki

Tested by: Mr. Hung Trinh

Issued Date: December 8, 2006

Test Dates: October 28-30, 2006

- The results in this Test Report apply only to the sample(s) tested, and the sample tested is randomly selected.
- This report must not be used by the client to claim product endorsement by NVLAP or any agency of the US Government.

**UltraTech**

3000 Bristol Circle, Oakville, Ontario, Canada, L6H 6G4  
Tel.: (905) 829-1570 Fax.: (905) 829-8050

Website: [www.ultratech-labs.com](http://www.ultratech-labs.com) Email: [vic@ultratech-labs.com](mailto:vic@ultratech-labs.com), Email: [tri.luu@sympatico.ca](mailto:tri.luu@sympatico.ca)



0685



31040/SIT



C-1376



46390-2049



200093-0



SL2-IN-E-1119R

## TABLE OF CONTENTS

|                                                                                                      |           |
|------------------------------------------------------------------------------------------------------|-----------|
| <b>EXHIBIT 1. INTRODUCTION .....</b>                                                                 | <b>1</b>  |
| 1.1. SCOPE.....                                                                                      | 1         |
| 1.2. RELATED SUBMITTAL(S)/GRANT(S) .....                                                             | 1         |
| 1.3. NORMATIVE REFERENCES .....                                                                      | 1         |
| <b>EXHIBIT 2. PERFORMANCE ASSESSMENT .....</b>                                                       | <b>2</b>  |
| 2.1. CLIENT INFORMATION .....                                                                        | 2         |
| 2.2. EQUIPMENT UNDER TEST (EUT) INFORMATION .....                                                    | 2         |
| 2.3. EUT'S TECHNICAL SPECIFICATIONS .....                                                            | 3         |
| 2.4. LIST OF EUT'S PORTS.....                                                                        | 3         |
| 2.5. ANCILLARY EQUIPMENT .....                                                                       | 4         |
| 2.6. GENERAL TEST SETUP.....                                                                         | 4         |
| <b>EXHIBIT 3. EUT OPERATING CONDITIONS AND CONFIGURATIONS DURING TESTS.....</b>                      | <b>5</b>  |
| 3.1. CLIMATE TEST CONDITIONS .....                                                                   | 5         |
| 3.2. OPERATIONAL TEST CONDITIONS & ARRANGEMENT FOR TESTS .....                                       | 5         |
| <b>EXHIBIT 4. SUMMARY OF TEST RESULTS .....</b>                                                      | <b>6</b>  |
| 4.1. LOCATION OF TESTS.....                                                                          | 6         |
| 4.2. APPLICABILITY & SUMMARY OF EMC EMISSION TEST RESULTS .....                                      | 6         |
| 4.3. MODIFICATIONS INCORPORATED IN THE EUT FOR COMPLIANCE PURPOSES.....                              | 6         |
| <b>EXHIBIT 5. MEASUREMENTS, EXAMINATIONS &amp; TEST DATA FOR EMC EMISSIONS.....</b>                  | <b>7</b>  |
| 5.1. TEST PROCEDURES.....                                                                            | 7         |
| 5.2. MEASUREMENT UNCERTAINTIES .....                                                                 | 7         |
| 5.3. MEASUREMENT EQUIPMENT USED .....                                                                | 7         |
| 5.4. POWER LINES CONDUCTED EMISSIONS [47 CFR 15.207] .....                                           | 8         |
| 5.5. 20 DB BANDWIDTH @ FCC 15.215(C) .....                                                           | 11        |
| 5.6. FREQUENCY STABILITY @ FCC §15.225(E) .....                                                      | 13        |
| 5.7. TRANSMITTER FUNDAMENTAL & SPURIOUS RADIATED EMISSIONS [47 CFR §§ 15.225, 15.209 & 15.205] ..... | 15        |
| <b>EXHIBIT 6. MEASUREMENT UNCERTAINTY.....</b>                                                       | <b>19</b> |
| 6.1. LINE CONDUCTED EMISSION MEASUREMENT UNCERTAINTY .....                                           | 19        |
| 6.2. RADIATED EMISSION MEASUREMENT UNCERTAINTY .....                                                 | 20        |

## EXHIBIT 1. INTRODUCTION

### 1.1. SCOPE

|                                      |                                                                                                                                                                                                                                                                                                              |
|--------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Reference:</b>                    | FCC Part 15, Subpart C, Sec. 15.225                                                                                                                                                                                                                                                                          |
| <b>Title:</b>                        | Code of Federal Regulations (CFR) Title 47 - Telecommunication, Part 15                                                                                                                                                                                                                                      |
| <b>Purpose of Test:</b>              | To gain FCC Equipment Authorization for Unlicensed Low Power Transmitters operating in the frequency band 13.110-14.010 MHz.                                                                                                                                                                                 |
| <b>Test Procedures:</b>              | Both conducted and radiated emissions measurements were conducted in accordance with American National Standards Institute ANSI C63.4 - American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz. |
| <b>Environmental Classification:</b> | Commercial, industrial or business environment                                                                                                                                                                                                                                                               |

### 1.2. RELATED SUBMITTAL(S)/GRANT(S)

None.

### 1.3. NORMATIVE REFERENCES

| Publication                 | Year                             | Title                                                                                                                                                               |
|-----------------------------|----------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| FCC 47 CFR Parts 0-19       | 2006                             | Code of Federal Regulations – Telecommunication                                                                                                                     |
| ANSI C63.4                  | 2003                             | American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz |
| CISPR 22<br>+A1<br>EN 55022 | 2003-04-10<br>2004-10-14<br>2003 | Limits and Methods of Measurements of Radio Disturbance Characteristics of Information Technology Equipment                                                         |
| CISPR 16-1-1                | 2003                             | Specification for radio disturbance and immunity measuring apparatus and methods.<br>Part 1-1: Measuring Apparatus                                                  |
| CISPR 16-2-1                | 2003                             | Specification for radio disturbance and immunity measuring apparatus and methods.<br>Part 2-1: Conducted disturbance measurement                                    |
| CISPR 16-2-3                | 2003                             | Specification for radio disturbance and immunity measuring apparatus and methods.<br>Part 2-3: Radiated disturbance measurement                                     |

#### ULTRATECH GROUP OF LABS

3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4  
Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: [vic@ultratech-labs.com](mailto:vic@ultratech-labs.com), Website: <http://www.ultratech-labs.com>

File #: MYT-094F15C225  
December 8, 2006

All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

## EXHIBIT 2. PERFORMANCE ASSESSMENT

### 2.1. CLIENT INFORMATION

| APPLICANT              |                                                                                                                   |
|------------------------|-------------------------------------------------------------------------------------------------------------------|
| <b>Name:</b>           | Bioscrypt Inc.                                                                                                    |
| <b>Address:</b>        | 505 Cochrane Drive<br>Markham, Ontario<br>Canada L3R 8E3                                                          |
| <b>Contact Person:</b> | Mr. Shiraz Kapadia<br>Phone #: 905-940-7784<br>Fax #: 905-940-7642<br>Email Address: shiraz.kapadia@bioscrypt.com |

| MANUFACTURER           |                                                                                                                   |
|------------------------|-------------------------------------------------------------------------------------------------------------------|
| <b>Name:</b>           | Bioscrypt Inc.                                                                                                    |
| <b>Address:</b>        | 505 Cochrane Drive<br>Markham, Ontario<br>Canada L3R 8E3                                                          |
| <b>Contact Person:</b> | Mr. Shiraz Kapadia<br>Phone #: 905-940-7784<br>Fax #: 905-940-7642<br>Email Address: shiraz.kapadia@bioscrypt.com |

### 2.2. EQUIPMENT UNDER TEST (EUT) INFORMATION

The following information (with the exception of the Date of Receipt) has been supplied by the applicant.

|                                       |                                                                  |
|---------------------------------------|------------------------------------------------------------------|
| <b>Brand Name:</b>                    | Bioscrypt Inc.                                                   |
| <b>Product Name:</b>                  | V-STATION, A, G, R                                               |
| <b>Model Name or Number:</b>          | V-STN, A, G, R                                                   |
| <b>Serial Number:</b>                 | Pre-production sample                                            |
| <b>Type of Equipment:</b>             | Low Power Transmitters                                           |
| <b>Input Power Supply Type:</b>       | 12.5 – 24 V DC, a generic external power supply                  |
| <b>Primary User Functions of EUT:</b> | Fingerprint reader (enroll, verification, communications output) |

---

#### ULTRATECH GROUP OF LABS

3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4  
Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: [vic@ultratech-labs.com](mailto:vic@ultratech-labs.com), Website: <http://www.ultratech-labs.com>

File #: MYT-094F15C225  
December 8, 2006

All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

## 2.3. EUT'S TECHNICAL SPECIFICATIONS

| TRANSMITTER                     |                                                                                                                                           |
|---------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------|
| Equipment Type:                 | Base station (fixed use)                                                                                                                  |
| Intended Operating Environment: | Commercial, Industrial or Business environment                                                                                            |
| Power Supply Requirement:       | 12.5 to 24 VDC                                                                                                                            |
| E-Field of the Carrier Signal:  | 46.14 dB $\mu$ V/m at 10 m                                                                                                                |
| Operating Frequency:            | 13.56 MHz                                                                                                                                 |
| RF Output Impedance:            | 50 Ohms                                                                                                                                   |
| Channel Spacing:                | N/A                                                                                                                                       |
| 20 dB Bandwidth:                | 3.27 kHz                                                                                                                                  |
| Modulation Type:                | ASK                                                                                                                                       |
| Antenna Connector Type:         | Manufacturer: Gemplus<br>Type: LC (Coil), soldered to the printed circuit board<br>Model: Gemprox C2<br>Frequency: 13.56 MHz<br>Gain: N/A |

## 2.4. LIST OF EUT'S PORTS

| Port Number | EUT's Port Description | Number of Identical Ports | Connector Type          | Cable Type (Shielded/Non-shielded) |
|-------------|------------------------|---------------------------|-------------------------|------------------------------------|
| 1           | Ethernet 10-BaseT      | 1                         | RJ45                    | Non-shielded                       |
| 2           | Host RS-485            | 2                         | RJ45 & Terminal Block   | Non-shielded                       |
| 3           | Host RS-232            | 2                         | RJ11 & Terminal Block   | Non-shielded                       |
| 4           | Power                  | 2                         | Bullet & Terminal Block | Non-shielded                       |
| 5           | Wiegand I/O            | 1                         | Terminal Block          | Non-shielded                       |
| 6           | General Purpose I/O    | 1                         | Terminal Block          | Non-shielded                       |
| 7           | Auxiliary Port         | 1                         | USB-Mini-B              | Shielded                           |

### NOTES:

- (1) Ports of the EUT which in normal operation were connected to ancillary equipment through interconnecting cables via a representative interconnecting cable to simulate the input/output characteristics.
- (2) Ports which are not connected to cables during normal intended operation (for factory/technical services uses only):  
  
Aux-port USB Mini B port used for Administrator purposes only, this port is NOT intended for normal operation.

### ULTRATECH GROUP OF LABS

3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4  
Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: [vic@ultratech-labs.com](mailto:vic@ultratech-labs.com), Website: <http://www.ultratech-labs.com>


File #: MYT-094F15C225  
December 8, 2006

All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

## 2.5. ANCILLARY EQUIPMENT

None.

## 2.6. GENERAL TEST SETUP

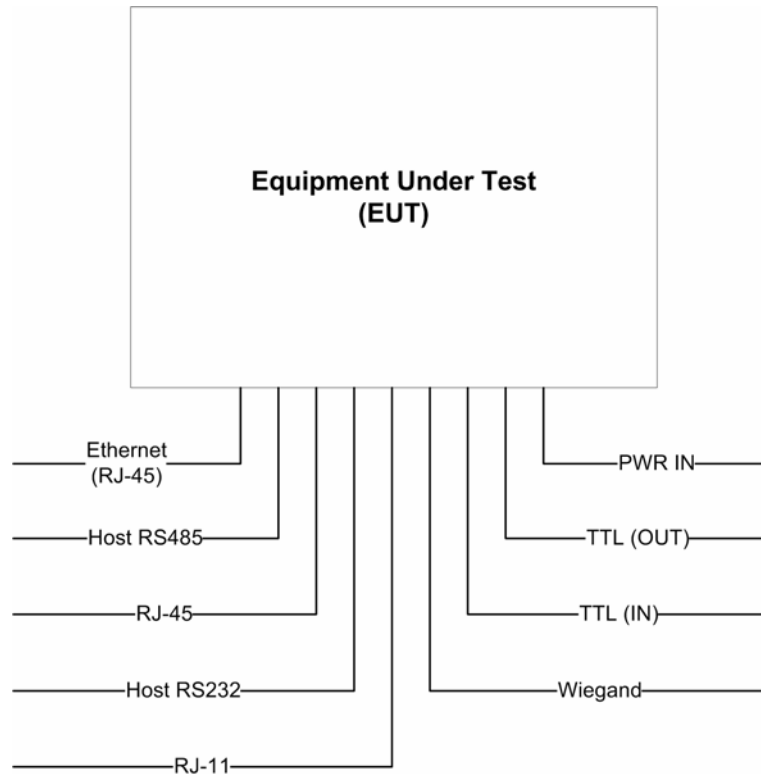

### ULTRATECH GROUP OF LABS

3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4

Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: [vic@ultratech-labs.com](mailto:vic@ultratech-labs.com), Website: <http://www.ultratech-labs.com>

File #: MYT-094F15C225

December 8, 2006

*All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)*

## **EXHIBIT 3. EUT OPERATING CONDITIONS AND CONFIGURATIONS DURING TESTS**

### **3.1. CLIMATE TEST CONDITIONS**

The climate conditions of the test environment are as follows:

|                     |                |
|---------------------|----------------|
| Temperature:        | 21°C           |
| Humidity:           | 51%            |
| Pressure:           | 102 kPa        |
| Power input source: | 12.5 to 24 VDC |

### **3.2. OPERATIONAL TEST CONDITIONS & ARRANGEMENT FOR TESTS**

Operational test condition 1 (transmitter tests):

The EUT was set to transmit continuously for duration of the tests.

Operational test condition 2 (all other tests):

The EUT represented a fully functional device using a special firmware load "FCC-Test" where all operations of the device were fully automated requiring no user intervention. The device would verify against a template pre-loaded onto the unit and perform this activity for each cycle.

## EXHIBIT 4. SUMMARY OF TEST RESULTS

### 4.1. LOCATION OF TESTS

All of the measurements described in this report were performed at Ultratech Group of Labs located in the city of Oakville, Province of Ontario, Canada.

- AC Powerline Conducted Emissions were performed in UltraTech's shielded room, 16'(L) by 12'(W) by 12'(H).
- Radiated Emissions were performed at the Ultratech's 3-10 TDK Semi-Anechoic Chamber situated in the Town of Oakville, province of Ontario. This test site been calibrated in accordance with ANSI C63.4, and found to be in compliance with the requirements of Sec. 2.948 of the FCC Rules. The descriptions and site measurement data of the Oakville 3-10 TDK Semi-Anechoic Chamber has been filed with FCC office (FCC File No.: 31040/SIT 1300B3) and Industry Canada office (Industry Canada File No.: IC2049-1). Last Date of Site Calibration: June. 20, 2006.

### 4.2. APPLICABILITY & SUMMARY OF EMC EMISSION TEST RESULTS

| FCC PARAGRAPH                                                                                                                                                                                      | TEST REQUIREMENTS                                                   | COMPLIANCE (YES/NO)      |
|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------|--------------------------|
| 15.203                                                                                                                                                                                             | Antenna Requirement                                                 | Yes.<br>Integral antenna |
| 15.207(a)                                                                                                                                                                                          | Power Line Conducted Emissions Measurements (Transmit & Receive)    | Yes                      |
| 15.215(c)                                                                                                                                                                                          | 26 & 20 dB Bandwidths                                               | Yes                      |
| 15.225 & 15.205/209                                                                                                                                                                                | Transmitter Radiated Emissions - Fundamental, Harmonic and Spurious | Yes                      |
| 15.225 (e)                                                                                                                                                                                         | Frequency Stability                                                 | Yes                      |
| The digital circuit portion of the EUT has been tested and verified to comply with FCC Part 15, Subpart B, Class B Digital Devices. The engineering test report can be provided upon FCC requests. |                                                                     |                          |

### 4.3. MODIFICATIONS INCORPORATED IN THE EUT FOR COMPLIANCE PURPOSES

None.

#### ULTRATECH GROUP OF LABS

3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4  
Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: [vic@ultratech-labs.com](mailto:vic@ultratech-labs.com), Website: <http://www.ultratech-labs.com>

File #: MYT-094F15C225  
December 8, 2006

All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

## **EXHIBIT 5. MEASUREMENTS, EXAMINATIONS & TEST DATA FOR EMC EMISSIONS**

### **5.1. TEST PROCEDURES**

This section contains test results only. Details of test methods and procedures can be found in ANSI C63.4 and ULTR-P001-2004.

### **5.2. MEASUREMENT UNCERTAINTIES**

The measurement uncertainties stated were calculated in accordance with requirements of UKAS Document LAB 34 with a confidence level of 95%. Please refer to Exhibit 6 for Measurement Uncertainties.

### **5.3. MEASUREMENT EQUIPMENT USED**

The measurement equipment used complied with the requirements of the Standards referenced in the Methods & Procedures ANSI C63.4 and CISPR 16-1.

---

#### **ULTRATECH GROUP OF LABS**

3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4  
Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: [vic@ultratech-labs.com](mailto:vic@ultratech-labs.com), Website: <http://www.ultratech-labs.com>

File #: MYT-094F15C225  
December 8, 2006

*All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)*

## 5.4. POWER LINES CONDUCTED EMISSIONS [47 CFR 15.207]

### 5.4.1. Limits

The equipment shall meet the limits of the following table:

| Frequency of emission (MHz) | Conducted limit (dBμV) |           |
|-----------------------------|------------------------|-----------|
|                             | Quasi-peak             | Average   |
| 0.15–0.5                    | 66 to 56*              | 56 to 46* |
| 0.5–5                       | 56                     | 46        |
| 5–30                        | 60                     | 50        |

\*Decreases with the logarithm of the frequency.

### 5.4.2. Method of Measurements

Refer to Ultratech Test Procedures, File # ULTR P001-2004 and ANSI C63.4 for measurement methods

### 5.4.3. Test Equipment List

| Test Instruments                                                     | Manufacturer    | Model No. | Serial No. | Frequency Range                      |
|----------------------------------------------------------------------|-----------------|-----------|------------|--------------------------------------|
| EMI Receiver System/<br>Spectrum Analyzer with<br>built-in Amplifier | Hewlett Packard | HP 8546A  | 3520A00248 | 9KHz-5.6GHz,<br>50 Ohms              |
| Transient Limiter                                                    | Hewlett Packard | 11947A    | 310701998  | 9 kHz – 200 MHz<br>10 dB attenuation |
| L.I.S.N.                                                             | EMCO            | 3825/2    | 89071531   | 9 kHz – 200 MHz<br>50 Ohms / 50 μH   |
| RF Shielded Chamber                                                  | RF Shielding    | ...       | ..         | ...                                  |

## ULTRATECH GROUP OF LABS


3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4  
Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: [vic@ultratech-labs.com](mailto:vic@ultratech-labs.com), Website: <http://www.ultratech-labs.com>

File #: MYT-094F15C225  
December 8, 2006

All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

#### 5.4.4. Test Data

**Plot 5.4.4.1** Power Lines Conducted Emissions  
Line Voltage: 12.5 VDC  
Line Tested: Positive

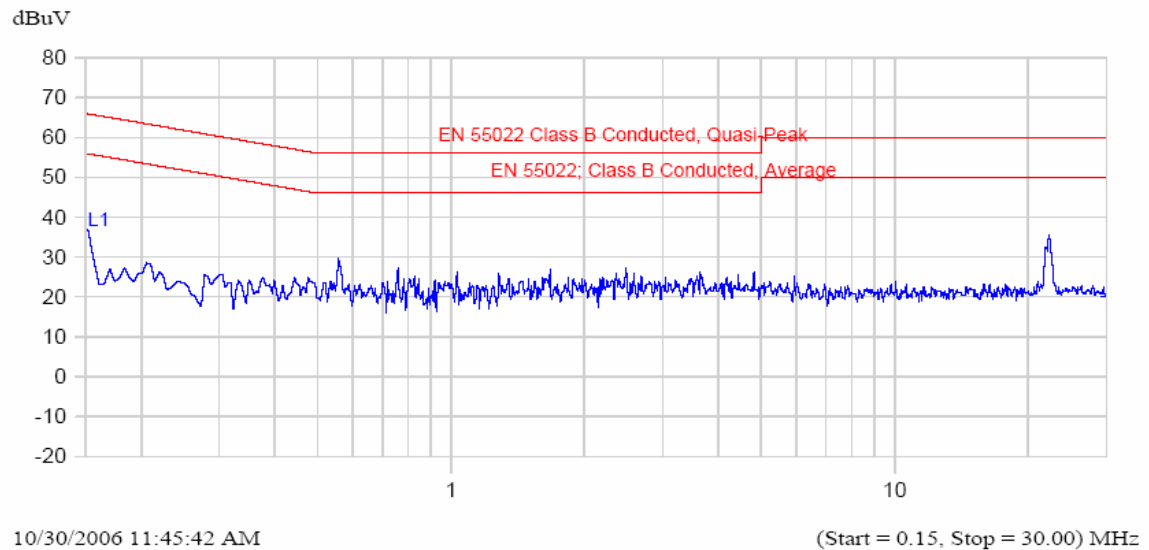

#### Current List

| Frequency<br>MHz | Peak<br>dBuV | QP<br>dBuV | Delta<br>dB | QP-QP Limit | Avg<br>dBuV | Delta<br>dB | Avg-Avg Limit | Trace Name | Comment |
|------------------|--------------|------------|-------------|-------------|-------------|-------------|---------------|------------|---------|
| 0.559            | 31.1         | 27.9       | -28.1       |             | 24.4        | -21.6       |               | L1         |         |
| 22.229           | 35.8         | 34.3       | -25.7       |             | 33.7        | -16.3       |               | L1         |         |

#### ULTRATECH GROUP OF LABS

3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4


Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: [vic@ultratech-labs.com](mailto:vic@ultratech-labs.com), Website: <http://www.ultratech-labs.com>

File #: MYT-094F15C225

December 8, 2006

All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

**Plot 5.4.4.2** Power Lines Conducted Emissions  
Line Voltage: 12.5 VDC  
Line Tested: Negative

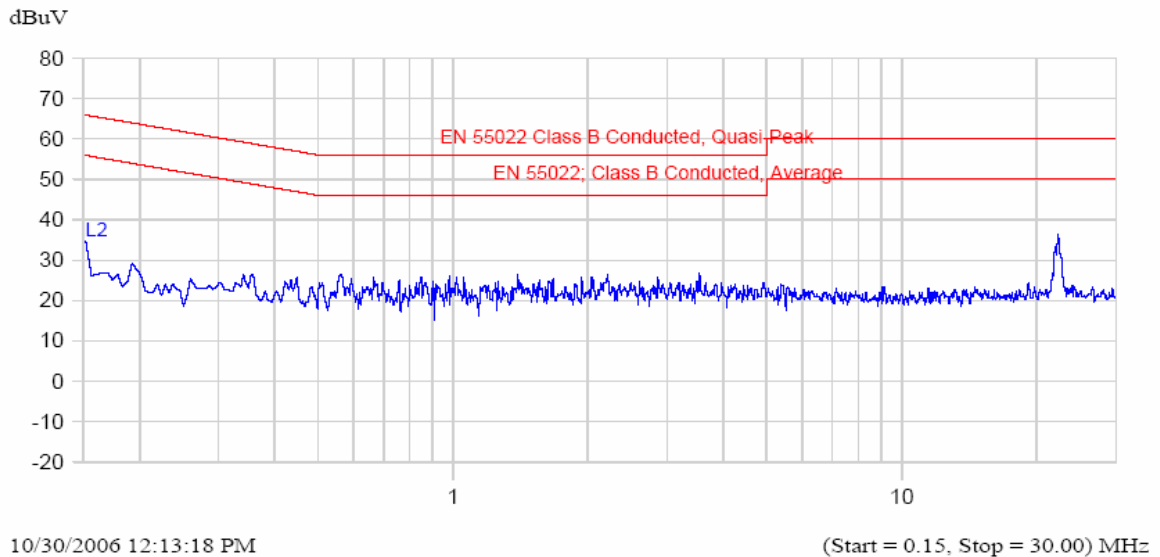

**Current List**

| Frequency<br>MHz | Peak<br>dBuV | QP<br>dBuV | Delta QP-QP<br>dB | Limit | Avg<br>dBuV | Delta Avg-Avg<br>dB | Limit | Trace Name | Comment |
|------------------|--------------|------------|-------------------|-------|-------------|---------------------|-------|------------|---------|
| 22.339           | 37.2         | 36.0       | -24.0             |       | 35.5        | -14.5               |       | L2         |         |

**ULTRATECH GROUP OF LABS**

3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4  
Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: [vic@ultratech-labs.com](mailto:vic@ultratech-labs.com), Website: <http://www.ultratech-labs.com>

File #: MYT-094F15C225  
December 8, 2006

All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

## 5.5. 20 DB BANDWIDTH @ FCC 15.215(C)

### 5.5.1. Limits

The rf spectrum shall not stay in the restricted band specified in FCC 15.205

### 5.5.2. Method of Measurements

Refer to ANSI C63.4

The transmitter output was connected to the spectrum analyzer through an attenuator. the bandwidth of the fundamental frequency was measured with the spectrum analyzer using RBW = 1% of approximate 26dB BW, VBW > RBW, Span = approx. 3x26dB BW. The 26 dB Bandwidth was measured and recorded.

### 5.5.3. Test Equipment List

| Test Instruments                   | Manufacturer       | Model No.     | Serial No. | Frequency Range                       |
|------------------------------------|--------------------|---------------|------------|---------------------------------------|
| Spectrum Analyzer/<br>EMI Receiver | Rohde &<br>Schawrz | FSEK20/B4/B21 | 834157/005 | 9 kHz – 40 GHz<br>with external mixer |

### 5.5.4. Test Data

| CHANNEL FREQUENCY<br>(MHz) | 20 dB Bandwidth<br>(KHz) |
|----------------------------|--------------------------|
| 13.56                      | 3.27                     |


## ULTRATECH GROUP OF LABS

3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4  
Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: [vic@ultratech-labs.com](mailto:vic@ultratech-labs.com), Website: <http://www.ultratech-labs.com>

File #: MYT-094F15C225  
December 8, 2006

*All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)*

**Plot 5.5.4.1: 20 dB Bandwidth**  
Frequency: 13.56 MHz

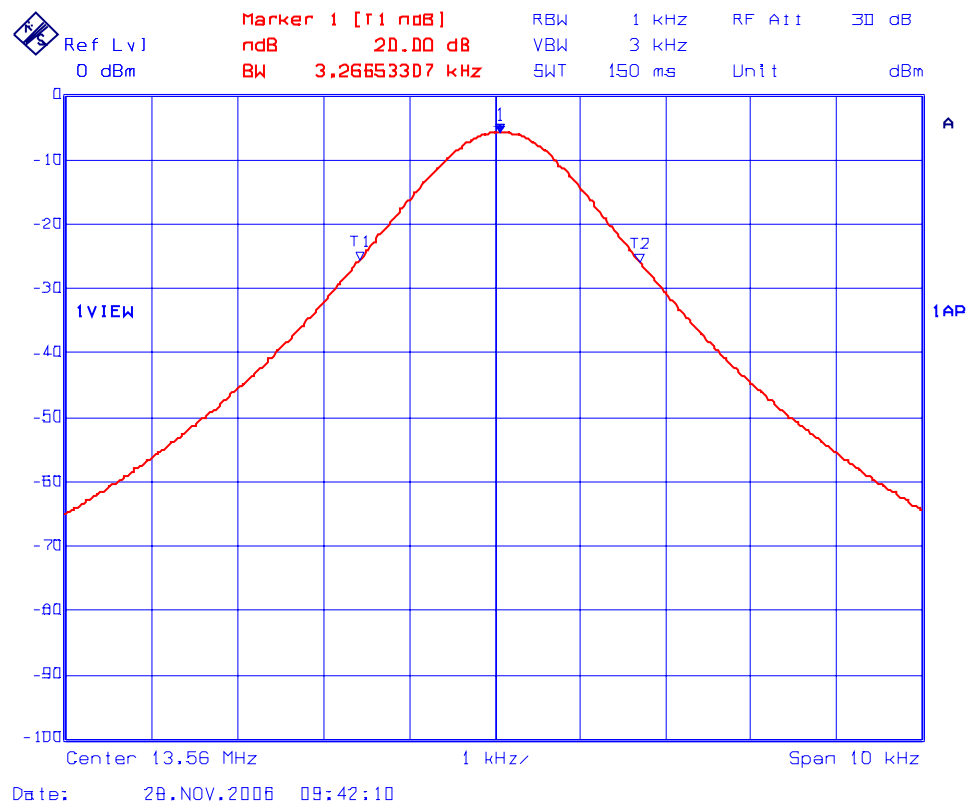

**ULTRATECH GROUP OF LABS**

3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4

Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: [vic@ultratech-labs.com](mailto:vic@ultratech-labs.com), Website: <http://www.ultratech-labs.com>

File #: MYT-094F15C225

December 8, 2006

All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

## 5.6. FREQUENCY STABILITY @ FCC §15.225(E)

### 5.6.1. Limits

The frequency tolerance of the carrier signal shall be maintained within +/- 0.01% of the operating frequency over a temperature variation of -20 degrees to +50 degrees C at normal supply voltage, and for a variation in the primary supply voltage from 85% to 115% of the rated supply voltage at a temperature of 20 degrees C. For battery operated equipment, the equipment tests shall be performed using a new battery.


### 5.6.2. Method of Measurements

Refer to Ultratech Test Procedures, File # ULTR P001-2004 and ANSI C63.4 for measurement methods

### 5.6.3. Test Equipment List

| Test Instruments                   | Manufacturer    | Model No.     | Serial No. | Frequency Range                       |
|------------------------------------|-----------------|---------------|------------|---------------------------------------|
| Spectrum Analyzer/<br>EMI Receiver | Rohde & Schawrz | FSEK20/B4/B21 | 834157/005 | 9 kHz – 40 GHz<br>with external mixer |
| Attenuator(s)                      | Bird            | ..            | ...        | DC – 22 GHz                           |
| Temperature & Humidity<br>Chamber  | Tenney          | T5            | 9723B      | -40° to +60 ° C range                 |

### 5.6.4. Test Arrangement

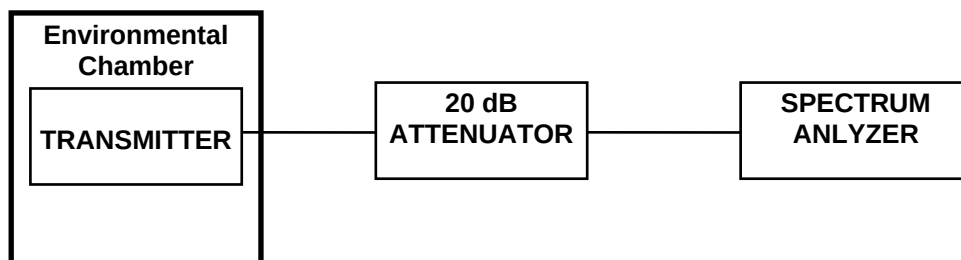

## ULTRATECH GROUP OF LABS

3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4  
Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: [vic@ultratech-labs.com](mailto:vic@ultratech-labs.com), Website: <http://www.ultratech-labs.com>

File #: MYT-094F15C225  
December 8, 2006

All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

#### 5.6.5. Test Data

|                                    |                         |
|------------------------------------|-------------------------|
| Frequency Band:                    | 13.553-13.567 MHz       |
| Center Frequency:                  | 13.56 MHz               |
| Frequency Tolerance Limit:         | $\pm 0.01\%$ or 1356 Hz |
| Max. Frequency Tolerance Measured: | 65 Hz                   |
| Input Voltage Rating:              | 12.5 to 24 VDC          |

| Ambient Temperature<br>(°C) | Center Frequency & RF Power Output Variation |                                         |
|-----------------------------|----------------------------------------------|-----------------------------------------|
|                             | Supply Voltage<br>(Lowest)<br>12.5 Volts     | Supply Voltage<br>(Highest)<br>24 Volts |
|                             | Hz                                           | Hz                                      |
| -30                         | -35                                          | -35                                     |
| -20                         | -10                                          | -10                                     |
| -10                         | -5                                           | -5                                      |
| 0                           | -5                                           | -5                                      |
| +10                         | -5                                           | -5                                      |
| +20                         | 0                                            | 0                                       |
| +30                         | 40                                           | 40                                      |
| +40                         | 55                                           | 55                                      |
| +50                         | 65                                           | 65                                      |
| +55                         | 65                                           | 65                                      |

#### ULTRATECH GROUP OF LABS

3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4  
Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: [vic@ultratech-labs.com](mailto:vic@ultratech-labs.com), Website: <http://www.ultratech-labs.com>

File #: MYT-094F15C225  
December 8, 2006

All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

## 5.7. TRANSMITTER FUNDAMENTAL & SPURIOUS RADIATED EMISSIONS [47 CFR §§ 15.225, 15.209 & 15.205]

### 5.7.1. Limits

- (a) The field strength of any emissions within the band 13.553-13.567 MHz shall not exceed 15,848 microvolts/meter at 30 meters.
- (b) Within the bands 13.410-13.553 MHz and 13.567-13.710 MHz, the field strength of any emissions shall not exceed 334 microvolts/meter at 30 meters.
- (c) Within the bands 13.110-13.410 MHz and 13.710-14.010 MHz the field strength of any emissions shall not exceed 106 microvolts/meter at 30 meters.
- (d) The field strength of any emissions appearing outside of the 13.110 – 14.010 MHz band shall not exceed the general radiated emission limits in § 15.209.

### Remarks:

**FCC CFR 47, Part 15, Subpart C, Para. 15.205(a) - Restricted Frequency Bands**

| MHz             | MHz               | MHz           | GHz           |
|-----------------|-------------------|---------------|---------------|
| 0.090 - 0.110   | 162.0125 - 167.17 | 2310 - 2390   | 9.3 - 9.5     |
| 0.49 - 0.51     | 167.72 - 173.2    | 2483.5 - 2500 | 10.6 - 12.7   |
| 2.1735 - 2.1905 | 240 - 285         | 2655 - 2900   | 13.25 - 13.4  |
| 8.362 - 8.366   | 322 - 335.4       | 3260 - 3267   | 14.47 - 14.5  |
| 13.36 - 13.41   | 399.9 - 410       | 3332 - 3339   | 14.35 - 16.2  |
| 25.5 - 25.67    | 608 - 614         | 3345.8 - 3358 | 17.7 - 21.4   |
| 37.5 - 38.25    | 960 - 1240        | 3600 - 4400   | 22.01 - 23.12 |
| 73 - 75.4       | 1300 - 1427       | 4500 - 5250   | 23.6 - 24.0   |
| 108 - 121.94    | 1435 - 1626.5     | 5350 - 5460   | 31.2 - 31.8   |
| 123 - 138       | 1660 - 1710       | 7250 - 7750   | 36.43 - 36.5  |
| 149.9 - 150.05  | 1718.8 - 1722.2   | 8025 - 8500   | Above 38.6    |
| 156.7 - 156.9   | 2200 - 2300       | 9000 - 9200   |               |

**FCC CFR 47, Part 15, Subpart C, Para. 15.209(a)  
-- Field Strength Limits within Restricted Frequency Bands --**

| FREQUENCY (MHz) | FIELD STRENGTH LIMITS (microvolts/m) | DISTANCE (Meters) |
|-----------------|--------------------------------------|-------------------|
| 0.009 - 0.490   | 2,400 / F (KHz)                      | 300               |
| 0.490 - 1.705   | 24,000 / F (KHz)                     | 30                |
| 1.705 - 30.0    | 30                                   | 30                |
| 30 - 88         | 100                                  | 3                 |
| 88 - 216        | 150                                  | 3                 |
| 216 - 960       | 200                                  | 3                 |
| Above 960       | 500                                  | 3                 |

### ULTRATECH GROUP OF LABS

3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4

Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: [vic@ultratech-labs.com](mailto:vic@ultratech-labs.com), Website: <http://www.ultratech-labs.com>

File #: MYT-094F15C225

December 8, 2006

All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

### 5.7.2. Method of Measurements

Refer to Ultratech Test Procedures, File # ULTR P001-2004 and ANSI C63.4 for measurement methods

Applies to harmonics/spurious that fall in the restricted bands listed in Section 15.205. the maximum permitted average field strength is listed in Section 15.209. A Pre-Amp and highpass filter are used for this measurement.

- For measurements from 9 KHz to 150 KHz, set RBW = 200 Hz, VBW  $\geq$  RBW, SWEEP=AUTO.
- For measurements from 150 KHz to 30 MHz, set RBW = 10 KHz, VBW  $\geq$  RBW, SWEEP=AUTO.
- For measurements from 30 MHz to 1 GHz, set RBW = 100 KHz, VBW  $\geq$  RBW, SWEEP=AUTO.
- For measurement above 1 GHz, set RBW = 1 MHz, VBW = 1 MHz, SWEEP=AUTO.

If the emission is pulsed, modified the unit for continuous operation, then use the settings above for measurements, then correct the reading by subtracting the peak-average correction factor derived from the appropriate duty cycle calculation. See Section 15.35(b) and (c).

•

### 5.7.3. Test Equipment List

| Test Instruments                   | Manufacturer    | Model No.     | Serial No. | Frequency Range                       |
|------------------------------------|-----------------|---------------|------------|---------------------------------------|
| Spectrum Analyzer/<br>EMI Receiver | Rohde & Schwarz | FSEK20/B4/B21 | 834157/005 | 9 kHz – 40 GHz<br>with external mixer |
| Microwave Amplifier                | Hewlett Packard | HP 83017A     |            | 1 GHz to 26.5 GHz                     |
| Microwave Amplifier                | Hewlett Packard | HP 83051A     | 3332A00471 | 1 GHz to 50 GHz                       |
| Active Loop Antenna                | EMCO            | 6507          | 8906-1167  | 1 kHz – 30 MHz                        |
| Biconilog Antenna                  | EMCO            | 3143          | 1029       | 20 MHz to 2 GHz                       |

### 5.7.4. Test Data

#### Note(s):

Since, the RF emissions from 9 kHz to 30 MHz are too small to be tested at 300 m, we chose to test it at 10 meters. The limits are linearly interpolated to 10 m distance, except for limits in the frequency range 9 - 490 kHz.

In the frequency range 9 kHz to 490 kHz, the limit is converted from 300 m to 10 m using the following formula:

$$\text{Limit at 10 meters in 9 to 490 KHz band} = [(2400 \times 300 / 10) / F (\text{KHz})]^2 = [72,000 / F (\text{KHz})]^2$$

Equivalently, the limits at 10 meters are converted as below:

| Frequency (MHz) | Field Strength (microvolts/m) | Measurement Distance (meters) |
|-----------------|-------------------------------|-------------------------------|
| 0.009 - 0.490   | $[72,000 / F (\text{KHz})]^2$ | 10                            |
| 0.490 - 1.705   | $72,000 / F (\text{KHz})$     | 10                            |
| 1.705 - 30.0    | 90                            | 10                            |
| 30 – 88         | 30                            | 10                            |
| 88 – 216        | 45                            | 10                            |
| 216 – 960       | 60                            | 10                            |
| Above 960       | 150                           | 10                            |

#### **ULTRATECH GROUP OF LABS**

3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4

Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: [vic@ultratech-labs.com](mailto:vic@ultratech-labs.com), Website: <http://www.ultratech-labs.com>

File #: MYT-094F15C225

December 8, 2006

All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

#### 5.7.4.1. Radiated Emissions from 9 KHz to 30 MHz at 10 Meters Distance Using Active Loop Antenna

| FREQUENCY<br>(MHz)                                                                                                                                                | RF<br>PEAK LEVEL<br>(dBuV/m) | RF<br>AVG LEVEL<br>(dBuV/m) | ANTENNA<br>PLANE<br>(Degree) | LIMIT @ 10m<br>15.225<br>(dBuV/m) | LIMIT<br>MARGIN<br>(dB) | PASS/<br>FAIL | Distance<br>(m) |
|-------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------|-----------------------------|------------------------------|-----------------------------------|-------------------------|---------------|-----------------|
| 13.56                                                                                                                                                             | 46.14                        | Peak                        | 0                            | 93.5                              | -47.4                   | PASS          | 10              |
| 13.56                                                                                                                                                             | 39.81                        | Peak                        | 90                           | 93.5                              | -53.7                   | PASS          | 10              |
| <ul style="list-style-type: none"> <li>The emissions were scanned from 10 kHz to 30 MHz and all emissions within 40 dB below the limits were recorded.</li> </ul> |                              |                             |                              |                                   |                         |               |                 |

#### 5.7.4.2. Radiated Emissions from 30 MHz to 1 GHz at 10 Meters Distance Using Biconilog Antenna

| FREQUENCY<br>(MHz)                                                                                                                                                  | RF<br>PEAK LEVEL<br>(dBuV/m) | EMI<br>DETECTOR<br>(Peak/QP) | ANTENNA<br>PLANE<br>(V/H) | LIMIT @ 10m<br>15.225/15.209<br>(dBuV/m) | LIMIT<br>MARGIN<br>(dB) | PASS/<br>FAIL | Distance<br>(m) |
|---------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------|------------------------------|---------------------------|------------------------------------------|-------------------------|---------------|-----------------|
| 33.0                                                                                                                                                                | 20.0                         | QP                           | V                         | 29.5                                     | -9.5                    | PASS          | 10              |
| 33.0                                                                                                                                                                | 19.8                         | QP                           | H                         | 29.5                                     | -9.7                    | PASS          | 10              |
| 39.3                                                                                                                                                                | 22.5                         | PEAK                         | V                         | 29.5                                     | -7.0                    | PASS          | 10              |
| 39.3                                                                                                                                                                | 25.5                         | PEAK                         | H                         | 29.5                                     | -4.0                    | PASS          | 10              |
| 48.0                                                                                                                                                                | 21.7                         | PEAK                         | V                         | 29.5                                     | -7.8                    | PASS          | 10              |
| 68.0                                                                                                                                                                | 23.2                         | PEAK                         | V                         | 29.5                                     | -6.3                    | PASS          | 10              |
| 68.0                                                                                                                                                                | 16.9                         | PEAK                         | H                         | 29.5                                     | -12.7                   | PASS          | 10              |
| 142.9                                                                                                                                                               | 21.9                         | PEAK                         | V                         | 33.0                                     | -11.1                   | PASS          | 10              |
| 147.8                                                                                                                                                               | 20.3                         | PEAK                         | V                         | 33.0                                     | -12.7                   | PASS          | 10              |
| 163.1                                                                                                                                                               | 22.1                         | PEAK                         | V                         | 33.0                                     | -10.9                   | PASS          | 10              |
| 163.1                                                                                                                                                               | 17.4                         | PEAK                         | H                         | 33.0                                     | -15.6                   | PASS          | 10              |
| 177.2                                                                                                                                                               | 20.4                         | PEAK                         | V                         | 33.0                                     | -12.6                   | PASS          | 10              |
| 203.0                                                                                                                                                               | 22.9                         | PEAK                         | V                         | 33.0                                     | -10.1                   | PASS          | 10              |
| 354.8                                                                                                                                                               | 24.8                         | PEAK                         | V                         | 35.5                                     | -10.7                   | PASS          | 10              |
| 354.8                                                                                                                                                               | 25.6                         | PEAK                         | H                         | 35.5                                     | -9.9                    | PASS          | 10              |
| 436.7                                                                                                                                                               | 24.7                         | PEAK                         | V                         | 35.5                                     | -10.8                   | PASS          | 10              |
| 769.1                                                                                                                                                               | 29.3                         | PEAK                         | V                         | 35.5                                     | -6.2                    | PASS          | 10              |
| 923.0                                                                                                                                                               | 29.4                         | PEAK                         | V                         | 35.5                                     | -6.1                    | PASS          | 10              |
| 983.0                                                                                                                                                               | 30.8                         | PEAK                         | V                         | 43.5                                     | -12.7                   | PASS          | 10              |
| 983.0                                                                                                                                                               | 32.0                         | PEAK                         | H                         | 43.5                                     | -11.5                   | PASS          | 10              |
| 989.9                                                                                                                                                               | 29.3                         | PEAK                         | V                         | 43.5                                     | -14.2                   | PASS          | 10              |
| 989.9                                                                                                                                                               | 32.0                         | PEAK                         | H                         | 43.5                                     | -11.5                   | PASS          | 10              |
| <ul style="list-style-type: none"> <li>The emissions were scanned from 30 MHz to 1000 GHz and all emissions within 20 dB below the limits were recorded.</li> </ul> |                              |                              |                           |                                          |                         |               |                 |


#### ULTRATECH GROUP OF LABS

3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4  
Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: [vic@ultratech-labs.com](mailto:vic@ultratech-labs.com), Website: <http://www.ultratech-labs.com>

File #: MYT-094F15C225  
December 8, 2006

All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

**Radiated Emissions Measurements @ 10m**  
**Bioscrypt, Model No.: V-Station, A,G,R**

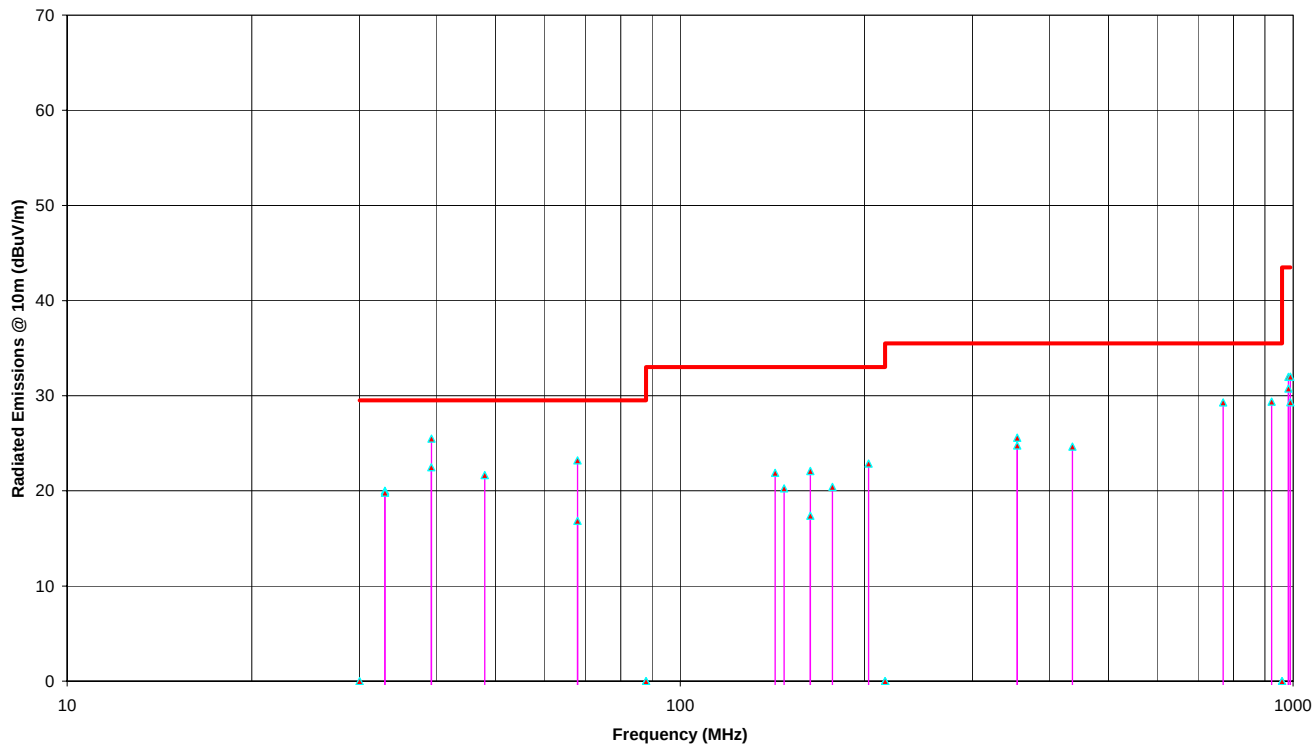

**ULTRATECH GROUP OF LABS**

3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4

Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: [vic@ultratech-labs.com](mailto:vic@ultratech-labs.com), Website: <http://www.ultratech-labs.com>

File #: MYT-094F15C225

December 8, 2006

All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

## EXHIBIT 6. MEASUREMENT UNCERTAINTY

The measurement uncertainties stated were calculated in accordance with the requirements of NIST Technical Note 1297 and LAB 34

### 6.1. LINE CONDUCTED EMISSION MEASUREMENT UNCERTAINTY

| CONTRIBUTION<br>(Line Conducted)                                                                                                                                   | PROBABILITY<br>DISTRIBUTION | UNCERTAINTY (dB) |             |
|--------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------|------------------|-------------|
|                                                                                                                                                                    |                             | 9-150 kHz        | 0.15-30 MHz |
| EMI Receiver specification                                                                                                                                         | Rectangular                 | $\pm 1.5$        | $\pm 1.5$   |
| LISN coupling specification                                                                                                                                        | Rectangular                 | $\pm 1.5$        | $\pm 1.5$   |
| Cable and Input Transient Limiter calibration                                                                                                                      | Normal (k=2)                | $\pm 0.3$        | $\pm 0.5$   |
| Mismatch: Receiver VRC $\Gamma_1 = 0.03$<br>LISN VRC $\Gamma_R = 0.8(9 \text{ kHz}) 0.2 (30 \text{ MHz})$<br>Uncertainty limits $20\text{Log}(1+\Gamma_1\Gamma_R)$ | U-Shaped                    | $\pm 0.2$        | $\pm 0.3$   |
| System repeatability                                                                                                                                               | Std. deviation              | $\pm 0.2$        | $\pm 0.05$  |
| Repeatability of EUT                                                                                                                                               | --                          | --               | --          |
| Combined standard uncertainty                                                                                                                                      | Normal                      | $\pm 1.25$       | $\pm 1.30$  |
| Expanded uncertainty U                                                                                                                                             | Normal (k=2)                | $\pm 2.50$       | $\pm 2.60$  |

Sample Calculation for Measurement Accuracy in 150 kHz to 30 MHz Band:

$$u_c(y) = \sqrt{\sum_{i=1}^m u_i^2(y)} = \pm \sqrt{(1.5^2 + 1.5^2)/3 + (0.5/2)^2 + (0.05/2)^2 + 0.35^2} = \pm 1.30 \text{ dB}$$

$$U = 2u_c(y) = \pm 2.6 \text{ dB}$$

#### ULTRATECH GROUP OF LABS

3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4

Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: [vic@ultratech-labs.com](mailto:vic@ultratech-labs.com), Website: <http://www.ultratech-labs.com>

File #: MYT-094F15C225

December 8, 2006

All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

## 6.2. RADIATED EMISSION MEASUREMENT UNCERTAINTY

| CONTRIBUTION<br>(Radiated Emissions)                                                                                                                         | PROBABILITY<br>DISTRIBUTION | UNCERTAINTY (+ dB)   |                 |
|--------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------|----------------------|-----------------|
|                                                                                                                                                              |                             | 3 m                  | 10 m            |
| Antenna Factor Calibration                                                                                                                                   | Normal (k=2)                | $\pm 1.0$            | $\pm 1.0$       |
| Cable Loss Calibration                                                                                                                                       | Normal (k=2)                | $\pm 0.3$            | $\pm 0.5$       |
| EMI Receiver specification                                                                                                                                   | Rectangular                 | $\pm 1.5$            | $\pm 1.5$       |
| Antenna Directivity                                                                                                                                          | Rectangular                 | $\pm 0.5$            | $\pm 0.5$       |
| Antenna factor variation with height                                                                                                                         | Rectangular                 | $\pm 2.0$            | $\pm 0.5$       |
| Antenna phase center variation                                                                                                                               | Rectangular                 | 0.0                  | $\pm 0.2$       |
| Antenna factor frequency interpolation                                                                                                                       | Rectangular                 | $\pm 0.25$           | $\pm 0.25$      |
| Measurement distance variation                                                                                                                               | Rectangular                 | $\pm 0.6$            | $\pm 0.4$       |
| Site imperfections                                                                                                                                           | Rectangular                 | $\pm 2.0$            | $\pm 2.0$       |
| Mismatch: Receiver VRC $\Gamma_1 = 0.2$<br>Antenna VRC $\Gamma_R = 0.67(\text{Bi}) 0.3 (\text{Lp})$<br>Uncertainty limits $20\text{Log}(1+\Gamma_1\Gamma_R)$ | U-Shaped                    | $\pm 1.1$<br>$-1.25$ | $\pm 0.5$       |
| System repeatability                                                                                                                                         | Std. Deviation              | $\pm 0.5$            | $\pm 0.5$       |
| Repeatability of EUT                                                                                                                                         |                             | -                    | -               |
| Combined standard uncertainty                                                                                                                                | Normal                      | $+2.19 / -2.21$      | $+1.74 / -1.72$ |
| Expanded uncertainty U                                                                                                                                       | Normal (k=2)                | $+4.38 / -4.42$      | $+3.48 / -3.44$ |

Calculation for maximum uncertainty when 3m biconical antenna including a factor of k = 2 is used:

$$U = 2u_c(y) = 2 \times (+2.19) = +4.38 \text{ dB} \quad \text{And} \quad U = 2u_c(y) = 2 \times (-2.21) = -4.42 \text{ dB}$$