

Certificate of Test

NCT CO., LTD.

211-71, Geumgok-ro, Hwaseong-si, Gyeonggi-do, 18511, Republic of Korea
(Tel: +82-31-323-6070 / Fax: +82-31-323-6071)

Report No.:
NE2411-F001

Page (1) / (27)

**1. Client**

- o Name : DREAMUS COMPANY
- o Address : 311, Gangnam-daero, Seocho-gu, Seoul, Republic of Korea
- o Date of Receipt : Oct. 30, 2024

2. Use of Report : FCC SDoC**3. Test Sample**

- o Product Name / Model Name : D&E OFFICIAL LIGHT STICK / ODE-D&E-OLS01

4. Place of Test : ☒ Fixed test ☐ Field test

(Address: 211-71, Geumgok-ro, Hwaseong-si, Gyeonggi-do, Republic of Korea(NCT CO., LTD.))

5. Date of Test : Nov. 05, 2024 ~ Nov. 13, 2024**6. Test method used :** FCC Part 15 Subpart B**7. Testing Environment :** Refer to 2.3 Test Condition**8. Test Results :** Refer to the test results

The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
This Test Report cannot be reproduced, except in full
This test report is not related to KOLAS recognition and RRA designation.

Affirmation	Tested by Wonhyung LEE 	Technical Manager Byeongcheol YOO 
-------------	---	--

Nov. 19, 2024

NCT CO., LTD.



Contact us at report@nct.re.kr to confirm the authenticity of this report

>>TABLE OF CONTENTS<<

1. General information	3
1.1 Test Performed	3
2. Information about test item	4
2.1 Applicant information	4
2.2 Equipment Under Test (EUT) description	4
2.3 Test condition	5
2.4 Ancillary Equipment	5
2.5 Cable List	5
2.6 Block diagram of the EUT test	6
2.7 Modification	7
2.8 Configuration	7
3. Test Report	8
3.1 Test Summary	8
3.2 Test Report Version	9
4. General information	10
4.1 Test Site Description	10
4.2 Radiated Disturbance Measurement – Below 1GHz	10
4.3 Conducted Disturbance Measurement	11
4.4 Radiated Disturbance Measurement – Above 1GHz	11
5. Test Procedure	12
5.1 Radiated Disturbance Measurements – Below 1GHz	12
5.2 Radiated Disturbance Measurements – Above 1GHz	13
5.3 Conducted Disturbance Measurements	14
6. List of Equipment Used For the Tests	15
7. EMI DATA	16
7.1 Radiated Disturbance Measurements (Below 1GHz)	16
7.2 Radiated Disturbance Measurements (Above 1GHz)	18
7.3 Conducted Disturbance Measurements	19
8. PHOTOGRAPHS	21



1. General information

1.1 Test Performed

Electromagnetic compatibility measurement facility (18511) is located at 211-71 Geumgok Road, Dongtan-myeon, Hwaseong-si, Gyeonggi-do, Republic of Korea.

Laboratory : NCT Co., Ltd.
 Address : 211-71, Geumgok-ro, Hwaseong-si, Gyeonggi-do, Republic of Korea
 Telephone : +82 (0)31-323-6070
 Facsimile : +82 (0)31-323-6071

SITE MAP

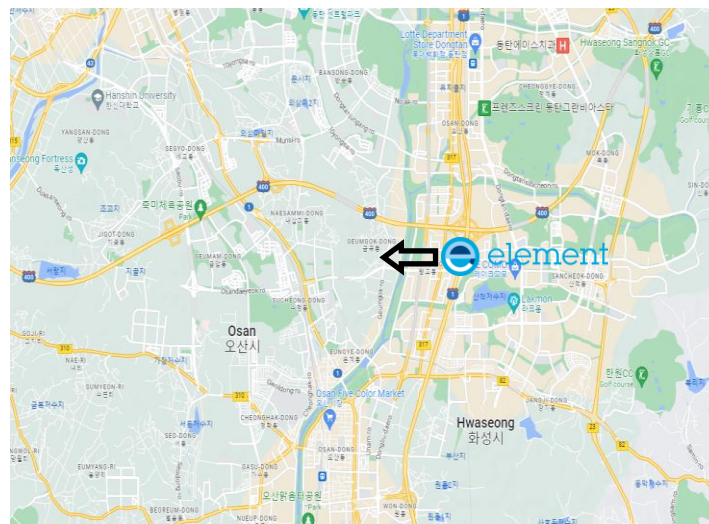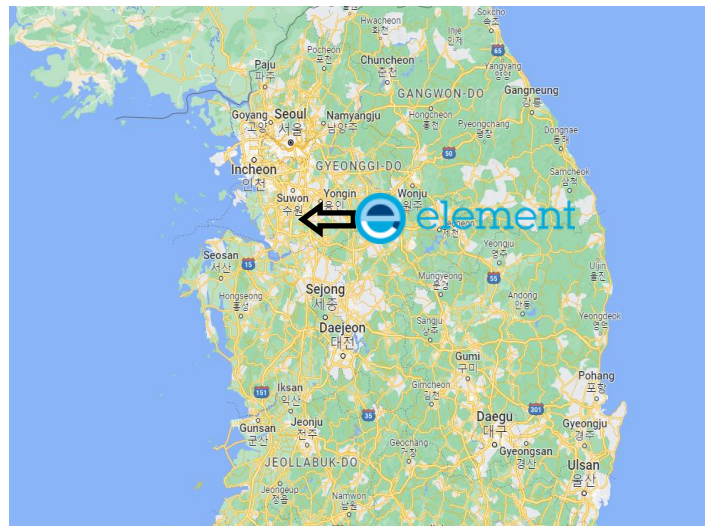

Test Report No.: NE2410-F003

211-71 Geumgok Road, Dongtan-myeon, Hwaseong-si, Gyeonggi-do, Republic of Korea

www.nct.re.kr TEL: +82-31-323-6070 FAX : +82-31-323-6071

2. Information about test item

2.1 Applicant information

Company name : DREAMUS COMPANY
Address : 311, Gangnam-daero, Seocho-gu, Seoul, Republic of Korea
Telephone / Facsimile : +82 10-4424-8911 / +82 507-517-0064
Contact name : DONG-HUN KIM
Manufacturer : DREAMUS COMPANY
Factory Address : 311, Gangnam-daero, Seocho-gu, Seoul, Republic of Korea

2.2 Equipment Under Test (EUT) description

Product name	D&E OFFICIAL LIGHT STICK
Trademark	-
Model and/or type reference	ODE-D&E-OLS01
Additional model name	-
Serial number	N/A
Date (s) of performance of tests	Nov. 05, 2024 ~ Nov. 13, 204
Date of receipt of test item	Oct. 30, 2024
EUT condition	Pre-productions, not damaged
Device Type	All other devices
Device Class	CLASS B
Interface Ports	Battery IN, USB-C
EUT Power Source	Lighting(USB-C) : DC 5 V Lighting(Battery) : DC 4.5 V
Highest internal frequency	Below 108 MHz
Firmware version	-
Note	-

2.3 Test condition

Environment Conditions	- Radiated Emissions	Below 1 GHz : (18.5 ± 1.0) °C / (38.9 ± 1.0) % R.H. Above 1 GHz : (-) °C / (-) % R.H.
	- Conducted Emissions	(22.6 ± 1.0) °C / (38.4 ± 1.0) % R.H.
Test mode	Lighting(USB-C) Mode, Lighting(Battery) Mode	
Test Voltage	Lighting(USB-C) Mode : AC 120 V, 60 Hz Lighting(Battery) Mode : DC 4.5 V	

2.4 Ancillary Equipment

[Lighting(USB-C) Mode]

Equipment	Model No.	Serial No.	Manufacturer
Adapter	N/A	N/A	N/A

[Lighting(Battery) Mode]

Equipment	Model No.	Serial No.	Manufacturer
AAA Battery(3EA)	N/A	N/A	N/A

2.5 Cable List

[Lighting(USB-C) Mode]

Cable List				
Type	Length (m)	Shielding (Cable/backshell)	Remarks	
			From	to
EUT	0.8	NO/NO	USB-C	Adapter (USB-A)



[Lighting(Battery) Mode]

Cable List				
Type	Length (m)	Shielding (Cable/backshell)	Remarks	
			From	to
EUT	-	-	Battery IN	AAA Battery(3EA) (DC OUT)

Test Report No.: NE2410-F003

211-71 Geumgok Road, Dongtan-myeon, Hwaseong-si, Gyeonggi-do, Republic of Korea
www.nct.re.kr TEL: +82-31-323-6070 FAX : +82-31-323-6071

2.6 Block diagram of the EUT test

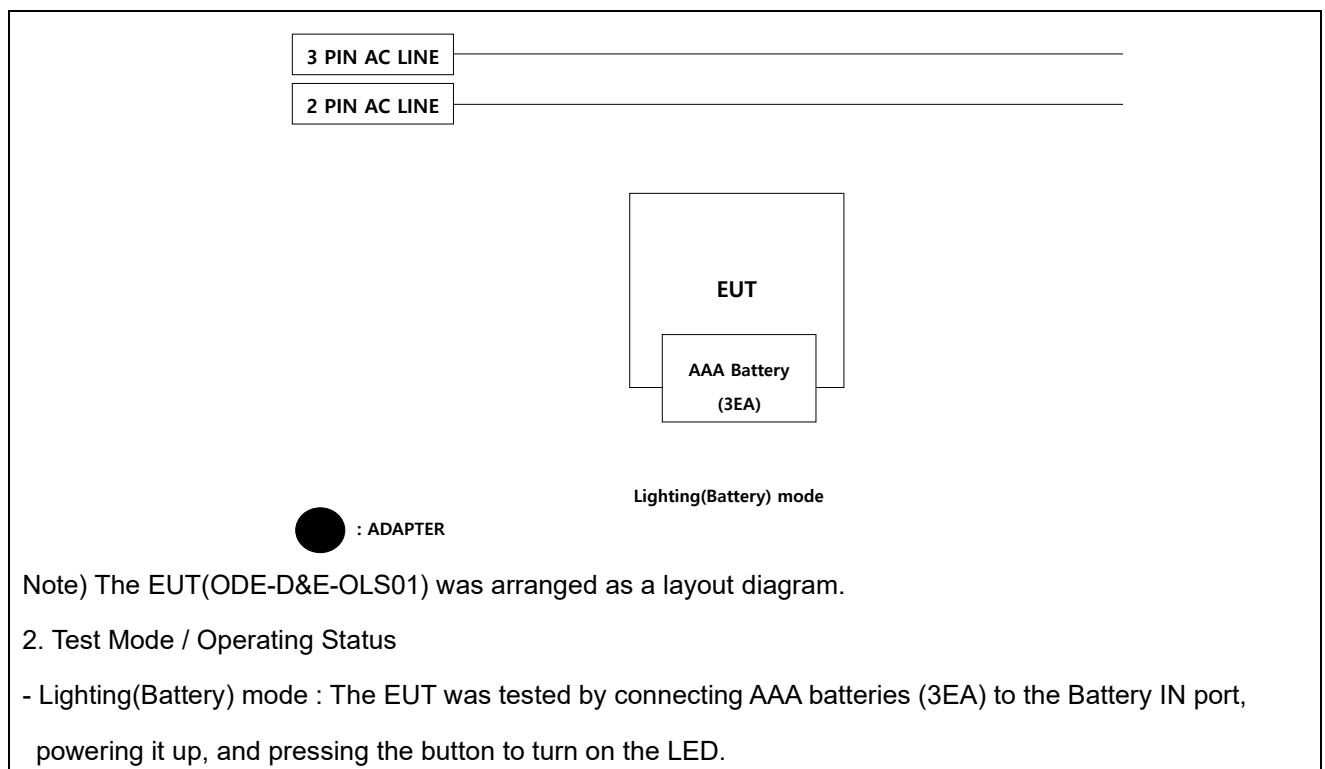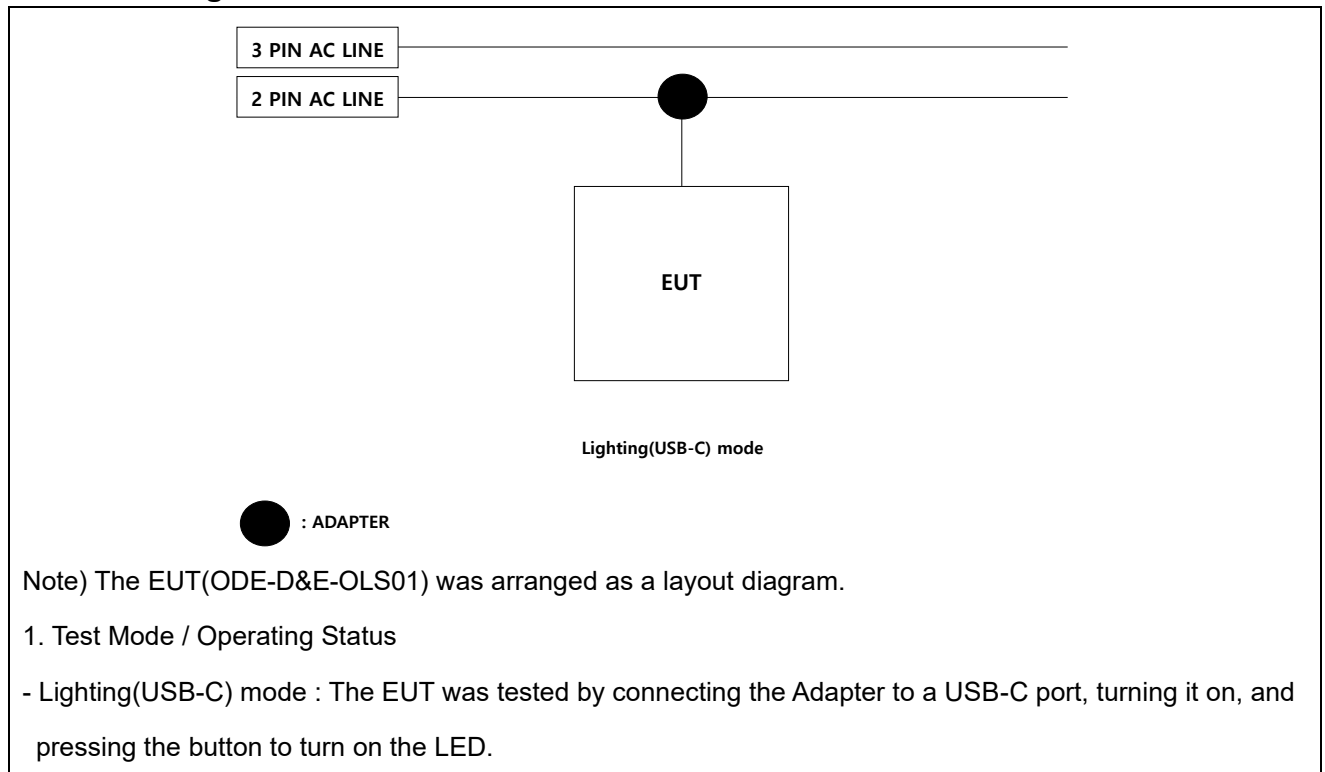

2.7 Modification

- Not Applicable

2.8 Configuration

Equipment	Model No.	Serial No.	Manufacturer
Main board	iSL-B245M-MAIN-V1	N/A	N/A

3. Test Report

3.1 Test Summary

Applied	Test items	Test method	Result
☒	Radiated disturbance	FCC Part 15.109 : (November 2, 2017)	C
☒	Conducted disturbance	FCC Part 15.107 : (November 2, 2017)	C

Note 1 : C=Complies, N/C=Not Complies, N/T=Not Tested, N/A=Not Applicable

* The data in this test report are traceable to the national or international standards.

* Uncertainties was taken into consideration through consultation with the client, and only the test results were determined to meet the requested specifications.

Frequency range to be scanned:

Highest frequency generated or used in the device or on which the device operates or tunes (MHz)	Upper frequency of measurement range (MHz)	Status (note 1)
Below 1.705	30	N/A
1.705 ~ 108	1 000	C
108 ~ 500	2 000	N/A
500 ~ 1 000	5 000	N/A
Above 1 000	5th harmonic of the highest frequency or 40 GHz, whichever is lower.	N/A

Note 1: C=Complies NC=Not Complies NT=Not Tested NA=Not Applicable

* The data in this test report are traceable to the national or international standards.

0.15 MHz ~ 30 MHz as conducted measurement

30 MHz ~ 1 000 MHz as Radiated measurement

1 GHz ~ 6 GHz as Radiated measurement

Bandwidth:

Measured by the CISPR quasi-peak function Bandwidth is 9 kHz in the frequency 0.15 MHz ~ 30 MHz and 120 kHz in the frequency 30 MHz ~ 1 000 MHz.

Measured by the CISPR Peak function Bandwidth is 1 MHz in the frequency 1 GHz ~ 40 GHz.

A sample calculation:

COR. F (correction factor) = Antenna factor + Cable loss - Amp.gain

Emission Level = meter reading + COR.F

Test Report No.: NE2410-F003

211-71 Geumgok Road, Dongtan-myeon, Hwaseong-si, Gyeonggi-do, Republic of Korea

www.nct.re.kr TEL: +82-31-323-6070 FAX : +82-31-323-6071

3.2 Test Report Version

Test Report No.	Date	Description
NE2411-F001	Nov. 19, 2024	Initial Issue

4. General information


4.1 Test Site Description

Facility


All the testing facilities are periodically serviced as a daily check for equipment and cables systems, an every 6 months facility check for the facilities and a monthly check and annual calibration for testing equipment according to ISO/IEC 17025. All the testing facilities are used as the same specifications shown below. There are descriptions both for radiated disturbance measurement and conducted disturbance measurement conformed by ANSI C 63.4:2017.

The NSA measurement of the OATS was performed on Jun 21, 2024 according to ANSI C 63.4:2017

4.2 Radiated Disturbance Measurement – Below 1 GHz

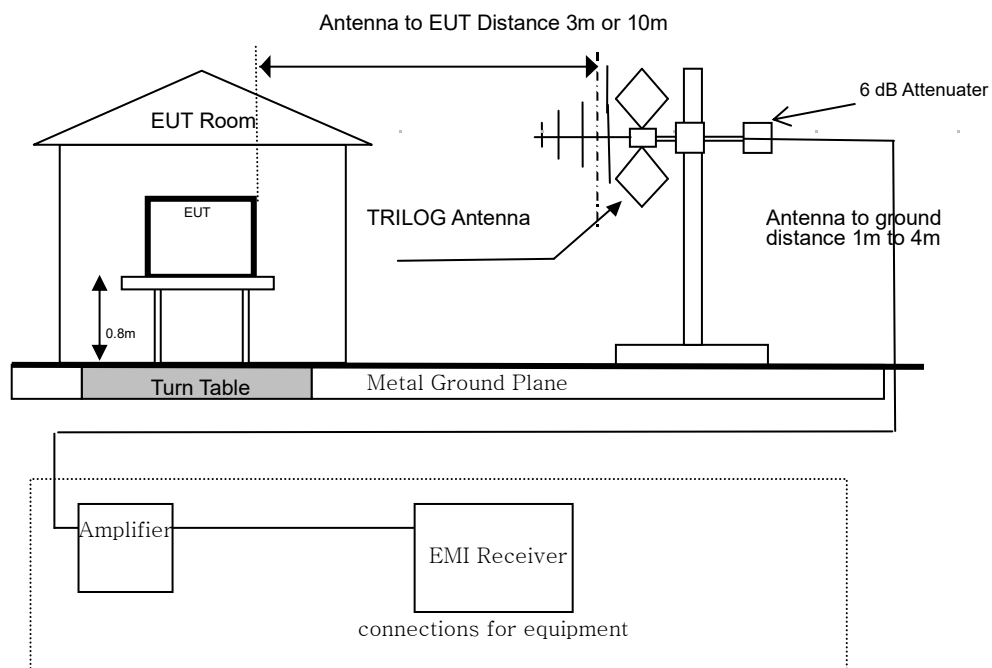


4.3 Conducted Disturbance Measurement

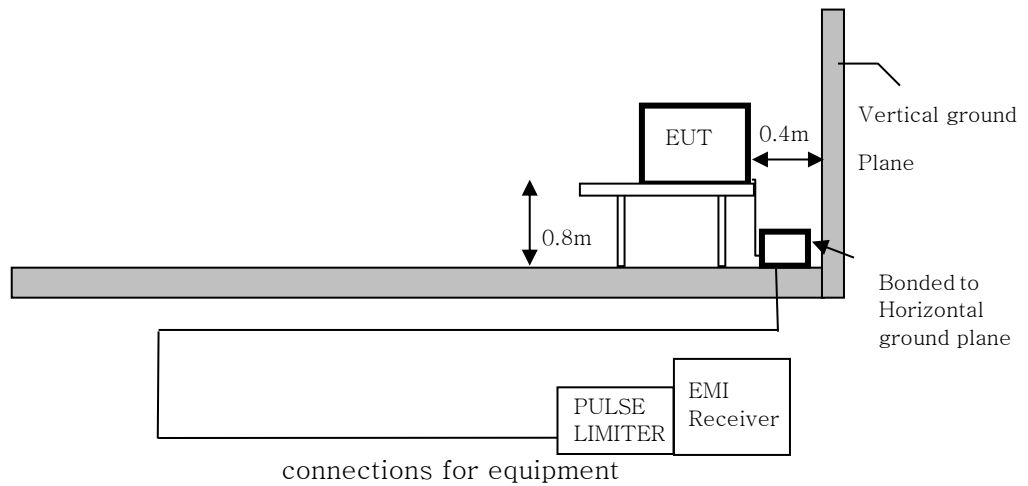

4.4 Radiated Disturbance Measurement – Above 1 GHz

The antenna has been changed to (1 ~ 4) m with the tilt function.

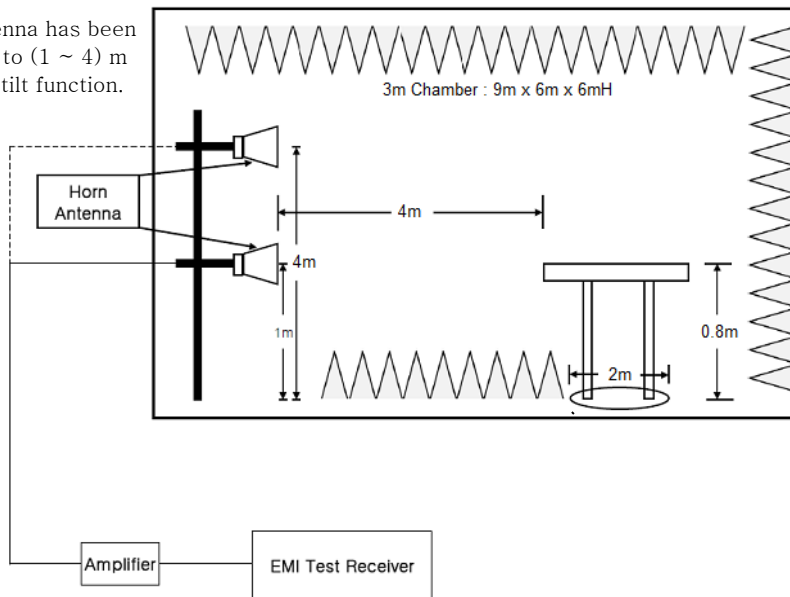

5. Test Procedure

5.1 Radiated Disturbance Measurements – Below 1 GHz

- Test site is met the requirements of ANSI C 63.4:2014 and the distance between the EUT and the antenna is adjusted 3 m / 10 m.
- The turntable can be rotated 360 degrees.
- The antenna can be adjusted between 1 m and 4 m in height above the ground.
- The EUT is placed on the non-conducting table with 0.8 m height on the turntable.
- Measurements are carried out using a EMI test receiver with peak detectors (100 kHz bandwidth) and an EMI receiver with quasi-peak detectors(120 kHz bandwidth).
- Refer to the list of test equipment used for the test.
- TRILOG antenna are used as wideband antenna.
- The TRILOG antenna is used in the frequency range of 30 MHz ~ 1 000 MHz, the Horn antenna is used in the frequency range of 1 GHz ~ 40 GHz.
- A variable attenuator is used for verifying amplifier's linearity.
- Rotating the turntable and adjusting the height of the antenna are carried out by control buttons on the console.
- Refer to "Brief Information"(page 4 ~ 6) about details of the EUT and configuration of the cables.
- Measurement is carried out by a NCT EMC Lab. operator as manual operation.
 - searching for some of High disturbance frequency points than the other points with the following settings;
bandwidth 100 kHz, frequency range 10 MHz between 30 MHz and 300 MHz and frequency range 50 MHz between 300 MHz and 1 GHz.
 - searching the worst direction with the maximum level of the disturbance wave in rotating the turntable 360 degrees at each searched frequency point.
 - setting the height of the antenna with the maximum level of the disturbance wave from 1 m to 4 m.
 - reading the disturbance level by the EMI receiver with quasi-peak detectors (120 kHz bandwidth) according to ANSI C 63.4:2014.
 - measuring to vertical and horizontal polarization.
 - calculating the measurement result with the following formula or equation:
(Measurement result = Measured value + Antenna factor + Cable loss - Amp. factor)

5.2 Radiated Disturbance Measurements – Above 1 GHz

- Test site is met the requirements of ANSI C 63.4:2014 and the distance between the EUT and the antenna is adjusted 3 m.
- The turntable can be rotated 360 degrees.
- The antenna can be adjusted between 1 m in height above the ground.
- The EUT is placed on the non-conducting table with 1 m height on the turntable.
- Measurements are carried out using a EMI test receiver with peak detectors (1 MHz bandwidth) and an EMI receiver with peak and average detectors (1 MHz bandwidth).
- Refer to the list of test equipment used for the test.
- HORN antenna are used as wideband antenna.
- The HORN antenna is used in the frequency range of 1 GHz ~ 40 GHz.
- A variable attenuator is used for verifying amplifier's linearity.
- Rotating the turntable and adjusting the height of the antenna are carried out by control buttons on the console.
- Refer to "Brief Information"(page 4 ~ 6) about details of the EUT and configuration of the cables.
- Measurement is carried out by a NCT Lab. operator as manual operation.
 - searching the worst direction with the maximum level of the disturbance wave in rotating the turn table 360 degrees at each searched frequency point.
 - setting the height of the antenna with the maximum level of the disturbance wave from 1 m
 - reading the disturbance level by the EMI receiver with peak and average detectors (1 MHz bandwidth) according to ANSI C 63.4:2014.
 - measuring to vertical and horizontal polarization.
 - calculating the measurement result with the following formula or equation:
(Measurement result = Measured value + Antenna factor + Cable loss - Amp. factor)

5.3 Conducted Disturbance Measurements

- The measurement is carried out on an open site with horizontal and metallic ground plane.
- An AMN(Artificial Mains Network) with a nominal impedance ($50\ \Omega$ / $50\ \mu\text{H}$) as defined in ANSI C 63.4:2014, shall be utilized.
- The AMN is grounded on a horizontal metal ground plane.
- Measurement is carried out using an EMI receiver with quasi-peak detectors and average detector.
(Refer to the List of test equipment used for the test.)
- The shortest distance between the EUT and the AMN is 0.8 m.
- The EUT is placed on the non-conducting table with 0.8 m height.
- A remote switch is used for changing phases between Line (L) and Neutral (N).
- Refer to "Brief Information"(page 5-8) about details of the EUT and configuration of the cables.
- Measurement is carried out as manual operation.
 - detecting the maximized emission level using the maxhold function after setting the spectrum analyzer bandwidth 1 MHz and the frequency range from $150\text{ kHz} \sim 1\text{ MHz}$, $1\text{ MHz} \sim 5\text{ MHz}$ and $5\text{ MHz} \sim 30\text{ MHz}$.
 - searching the maximum frequency point of the disturbance wave in each frequency range.
 - reading the disturbance level of quasi-peak, average and Line (L) and Neutral (N) in 9 kHz bandwidth by the EMI receiver.
 - calculating the measurement result with the following formula or equation.
(Result = Reading + Cor.F.)
(Margin = Limit- Result)

6. List of Equipment Used For the Tests

No.	Item	Model Name	Manufacturer	Serial No.	Interval	Next Cal.
1	Receiver	ESVS30	ROHDE & SCHWARZ	826006/015	1 Year	2025.05.23
2	RF AMPLIFIER	8447F	H.P	3113A05434	1 Year	2025.05.21
3	TRILOG Broadband Antenna(KOLAS)	VULB 9168	Schwarzbeck	01029	2 Year	2025.05.03
4	EMI Test Receiver	ESR	ROHDE&SCHWARZ	102138	1 Year	2025.05.21
5	Double Ridged Broadband Horn Antenna(KOLAS)	BBHA 9120D	Schwarzbeck	02087	1 Year	2025.04.24
6	EMI Test Receiver	ESRP3	ROHDE&SCHWARZ	102116	1 Year	2025.05.21
7	LISN(Without cord)	NSLK 8127	Schwarzbeck	00984	1 Year	2025.05.22
8	LISN(with cord)	NSLK 8127	Schwarzbeck	00984	1 Year	2025.10.28
9	LISN_SUB	NSLK 8127	Schwarzbeck	00983	1 Year	2025.05.21
10	DUMMY RESISTOR	PE6147	PASTERNAK	N/A	1 Year	2025.05.22
11	PULSE LIMITER	VTSD 9561-F	SCHWARZBECK	00623	1 Year	2025.02.26
12	Amplifier	TK-PA18H	TESTEK	190007-L	1 Year	2025.05.21
13	Signal Analyzer	MS2850A	Anritsu	6261831920	1 Year	2025.05.21

Test Report No.: NE2410-F003

211-71 Geumgok Road, Dongtan-myeon, Hwaseong-si, Gyeonggi-do, Republic of Korea
 www.nct.re.kr TEL: +82-31-323-6070 FAX : +82-31-323-6071

7. EMI DATA

7.1 Radiated Disturbance Measurements (Below 1 GHz)

■ FCC CLASS B

TEST SHEET(RE)

EUT Description

Order No : NE-241030-0880

PRODUCT : D&E OFFICIAL LIGHT STICK Company : DREAMUS COMPANY

MODEL : ODE-D&E-OLS01 Serial No. : -

POWER RATING : AC 120 V, 60 Hz Ambient : (18.5) °C, (38.9) % R.H.

Test Date : 2024.10.13 Test Engineer : Wonhyung LEE

Mode : Lighting(USB-C)

VULB9168(2023.05.03~2025.05.03) / Cable Loss(2024.06.26~2024.12.26)

8447F(2024.05.21~2025.05.21)

Freq.	Reading(dBμV)		A	H	Antenna	Cable Loss	Amp.	Result	Limit	Margin
(MHz)	H	V	(°)	(m)	(dB/m)	(dB)	(dB)	(dBμV/m)	(dB)	(dB)
30.00	—	28.10	155	1.00	18.20	0.20	28.09	18.41	40.00	21.59
60.07	—	34.10	65	1.00	18.70	0.30	28.05	25.05	40.00	14.95
68.06	—	33.50	142	1.00	17.38	0.38	28.03	23.23	40.00	16.77
147.85	29.10	—	220	1.00	18.78	1.14	27.72	21.30	43.50	22.20
711.12	29.20	—	98	1.00	27.00	3.64	28.53	31.31	46.00	14.69
746.82	29.00	—	180	1.00	27.64	3.79	28.45	31.98	46.00	14.02

TEST EQUIPMENT USED : 1, 2, 3

Test Repot No.: NE2410-F003

211-71 Geumgok Road, Dongtan-myeon, Hwaseong-si, Gyeonggi-do, Republic of Korea

www.nct.re.kr TEL: +82-31-323-6070 FAX : +82-31-323-6071

TEST SHEET(RE)

EUT Description

Order No : NE-241030-0880

PRODUCT : D&E OFFICIAL LIGHT STICK Company : DREAMUS COMPANY

MODEL : ODE-D&E-OLS01 Serial No. : -

POWER RATING : DC 4.5 V Ambient : (18.5) °C, (38.9) % R.H.

Test Date : 2024.11.13 Test Engineer : Wonhyung LEE

Mode : Lighting(Battery)

VULB9168(2023.05.03~2025.05.03) / Cable Loss(2024.06.26~2024.12.26)

8447F(2024.05.21~2025.05.21)

Freq.	Reading(dBμV)		A	H	Antenna	Cable Loss	Amp.	Result	Limit	Margin
(MHz)	H	V	(°)	(m)	(dB/m)	(dB)	(dB)	(dBμV/m)	(dB)	(dB)
30.00	—	29.80	124	1.00	18.20	0.20	28.09	20.11	40.00	19.89
57.64	—	30.00	167	1.00	19.04	0.30	28.05	21.29	40.00	18.71
63.23	—	31.20	152	1.00	18.28	0.33	28.04	21.77	40.00	18.23
337.39	28.50	—	241	1.00	20.15	2.19	27.48	23.36	46.00	22.64
712.55	29.10	—	242	1.00	27.00	3.65	28.53	31.22	46.00	14.78
754.11	28.80	—	90	1.00	27.70	3.82	28.44	31.88	46.00	14.12

TEST EQUIPMENT USED : 1, 2, 3

Test Repot No.: NE2410-F003

211-71 Geumgok Road, Dongtan-myeon, Hwaseong-si, Gyeonggi-do, Republic of Korea

www.nct.re.kr TEL: +82-31-323-6070 FAX : +82-31-323-6071

7.2 Radiated Disturbance Measurements (Above 1 GHz)

Not Applicable

TEST EQUIPMENT USED : -

- Due to the nature of the software, the [°] symbol of the Test Conditions in the measurement data is denoted by ['], and the [μ] symbol of the graph and measured values is denoted by [u].

Test Repot No.: NE2410-F003

211-71 Geumgok Road, Dongtan-myeon, Hwaseong-si, Gyeonggi-do, Republic of Korea
www.nct.re.kr TEL: +82-31-323-6070 FAX : +82-31-323-6071

7.3 Conducted Disturbance Measurements

[LINE]


CE_L1

1 / 1

Test Report

Common Information

Test Description:	NE-241030-0880
Test Standard:	FCC Part 15, Sub B
Test Mode:	Lighting(USB-C)
Test Conditions:	AC 120 V, 60 Hz / 22.6 °C, 38.4 % R. H.
Operator Name:	Wonhyung LEE
Comment:	-

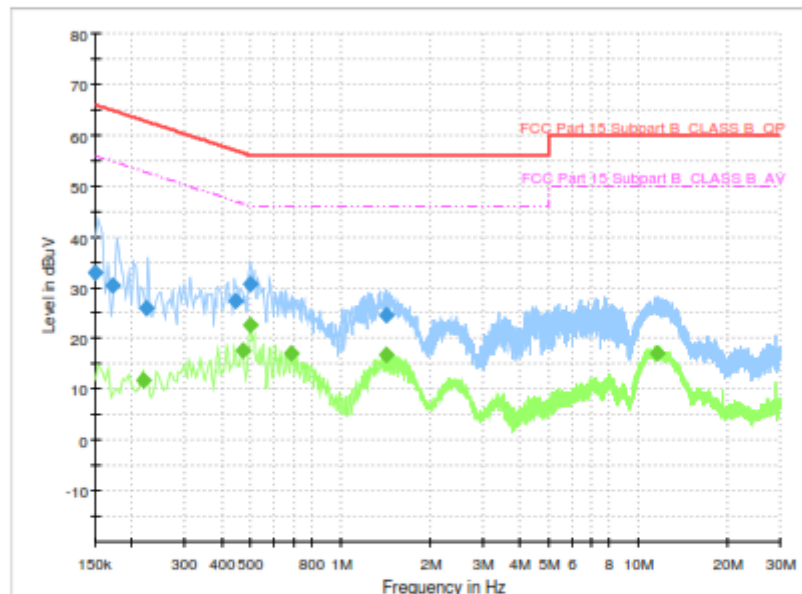

Final Result

Frequency (MHz)	QuasiPeak (dBuV)	CAverage (dBuV)	Limit (dBuV)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Line	Corr. (dB)
0.150000	32.99	---	66.00	33.01	1000.0	9.000	L1	9.8
0.172000	30.40	---	64.86	34.46	1000.0	9.000	L1	9.8
0.218000	---	11.70	52.90	41.19	1000.0	9.000	L1	9.8
0.224000	26.03	---	62.67	36.64	1000.0	9.000	L1	9.8
0.446000	27.42	---	56.95	29.53	1000.0	9.000	L1	9.9
0.470000	---	17.65	46.51	28.86	1000.0	9.000	L1	9.9
0.496000	30.78	---	56.07	25.29	1000.0	9.000	L1	10.0
0.500000	---	22.69	46.00	23.31	1000.0	9.000	L1	10.0
0.684000	---	17.17	46.00	28.83	1000.0	9.000	L1	10.0
1.432000	---	16.81	46.00	29.19	1000.0	9.000	L1	10.2
1.432000	24.66	---	56.00	31.34	1000.0	9.000	L1	10.2
11.544000	---	17.07	50.00	32.93	1000.0	9.000	L1	10.6

2024-11-13

TEST EQUIPMENT USED : 6, 8, 11

- Due to the nature of the software, the [°] symbol of the Test Conditions in the measurement data is denoted by ['], and the [μ] symbol of the graph and measured values is denoted by [u].

Test Report No.: NE2410-F003


211-71 Geumgok Road, Dongtan-myeon, Hwaseong-si, Gyeonggi-do, Republic of Korea

www.nct.re.kr TEL: +82-31-323-6070 FAX : +82-31-323-6071

Test Report

Common Information

Test Description: NE-241030-0880
 Test Standard: FCC Part 15, Sub B
 Test Mode: Lighting(USB-C)
 Test Conditions: AC 120 V, 60 Hz / 22.6 °C, 38.4 % R. H.
 Operator Name: Wonhyung LEE
 Comment: -

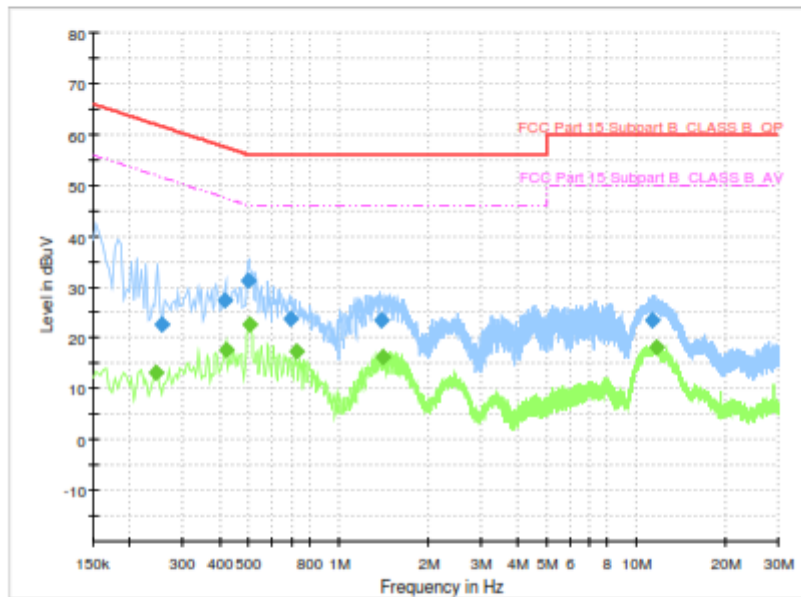

Final Result

Frequency (MHz)	QuasiPeak (dBuV)	CAverage (dBuV)	Limit (dBuV)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Line	Corr. (dB)
0.244000	---	13.03	51.96	38.92	1000.0	9.000	N	9.8
0.254000	22.59	---	61.63	39.03	1000.0	9.000	N	9.8
0.416000	27.36	---	57.53	30.17	1000.0	9.000	N	9.9
0.420000	---	17.49	47.45	29.96	1000.0	9.000	N	9.9
0.500000	31.17	---	56.00	24.83	1000.0	9.000	N	10.0
0.506000	---	22.54	46.00	23.46	1000.0	9.000	N	10.0
0.692000	23.75	---	56.00	32.25	1000.0	9.000	N	10.0
0.722000	---	17.38	46.00	28.62	1000.0	9.000	N	10.0
1.390000	23.45	---	56.00	32.55	1000.0	9.000	N	10.2
1.408000	---	16.17	46.00	29.83	1000.0	9.000	N	10.2
11.370000	23.53	---	60.00	36.47	1000.0	9.000	N	10.5
11.680000	---	18.08	50.00	31.92	1000.0	9.000	N	10.6

2024-11-13

TEST EQUIPMENT USED : 6, 8, 11

- Due to the nature of the software, the [°] symbol of the Test Conditions in the measurement data is denoted by [°], and the [μ] symbol of the graph and measured values is denoted by [u].

Test Report No.: NE2410-F003

211-71 Geumgok Road, Dongtan-myeon, Hwaseong-si, Gyeonggi-do, Republic of Korea
 www.nct.re.kr TEL: +82-31-323-6070 FAX : +82-31-323-6071


8. PHOTOGRAPHS

Photograph of the Radiated Disturbance Measurements (Maximum emission configuration) – Below 1 GHz

[Front_Lighting(USB-C)]




[Rear_Lighting(USB-C)]

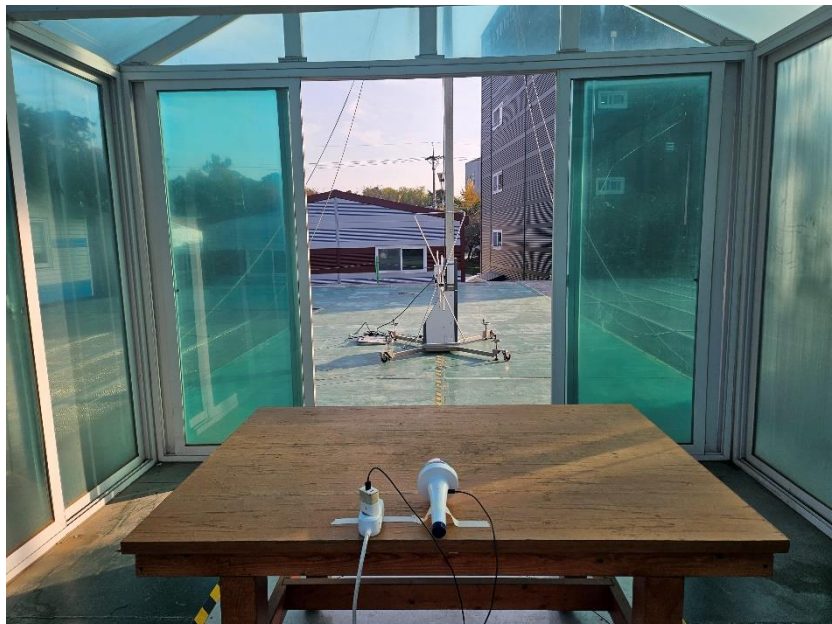

[Front_Lighting(Battery)]



[Rear_Lighting(Battery)]

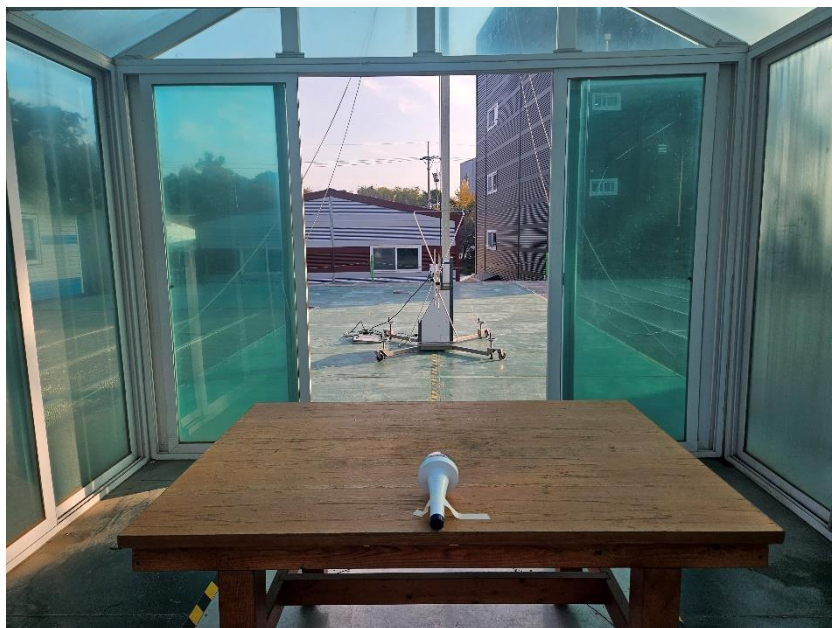


[Front]

Not Applicable


[Rear]

Not Applicable

[Front_Lighting(USB-C)]

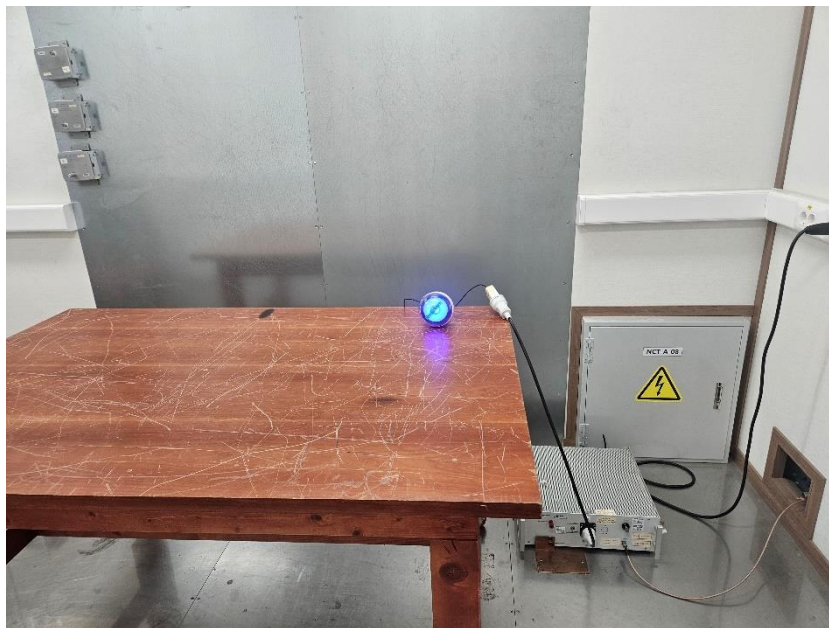

[Rear_Lighting(USB-C)]

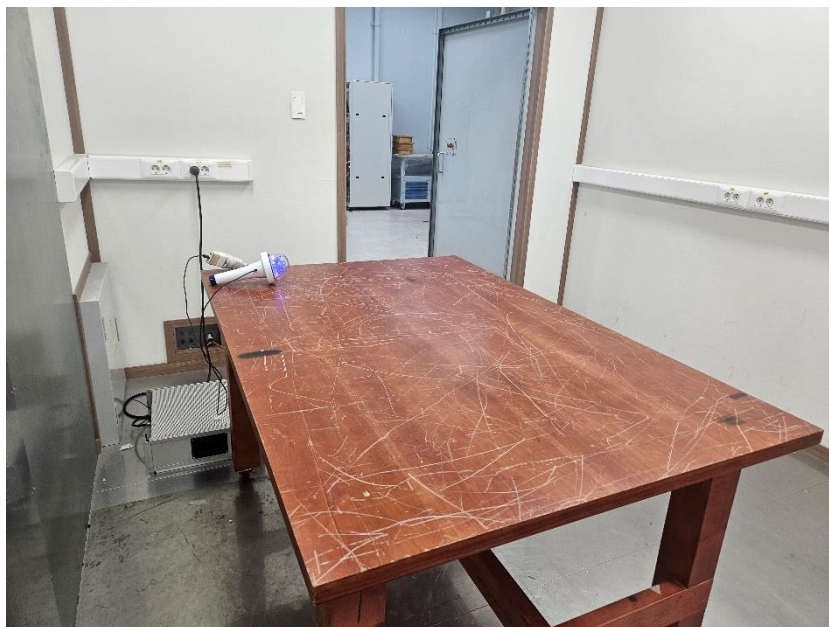

EUT Photo

Front of EUT



Rear of EUT




Test Report No.: NE2410-F003

211-71 Geumgok Road, Dongtan-myeon, Hwaseong-si, Gyeonggi-do, Republic of Korea
www.nct.re.kr TEL: +82-31-323-6070 FAX : +82-31-323-6071

Internal of EUT




Position of Label

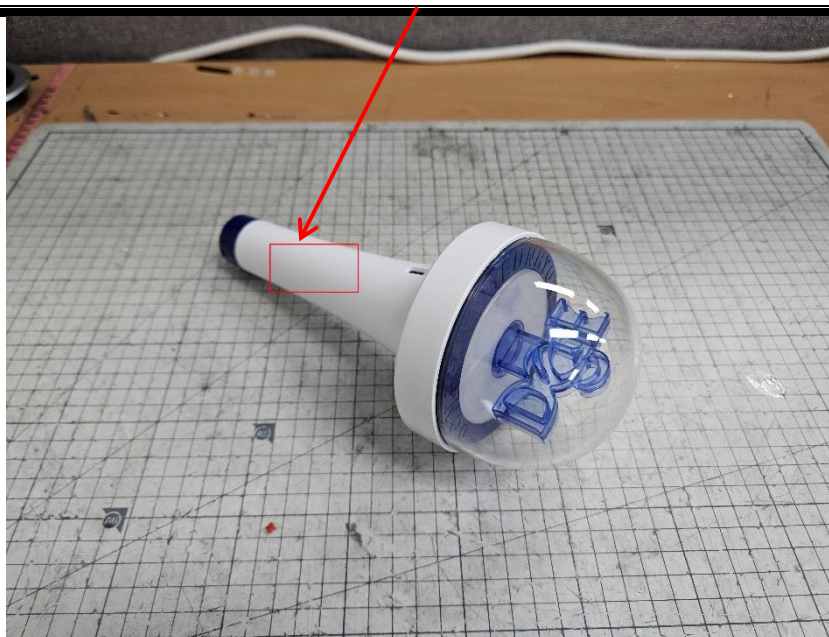


Test Report No.: NE2410-F003

211-71 Geumgok Road, Dongtan-myeon, Hwaseong-si, Gyeonggi-do, Republic of Korea
www.nct.re.kr TEL: +82-31-323-6070 FAX : +82-31-323-6071

Front of Main board

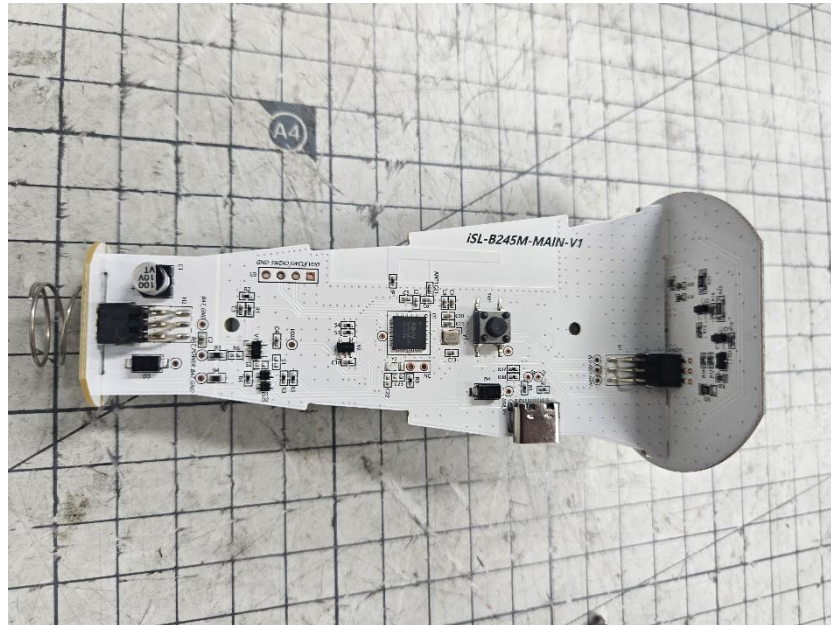

Rear of Main board

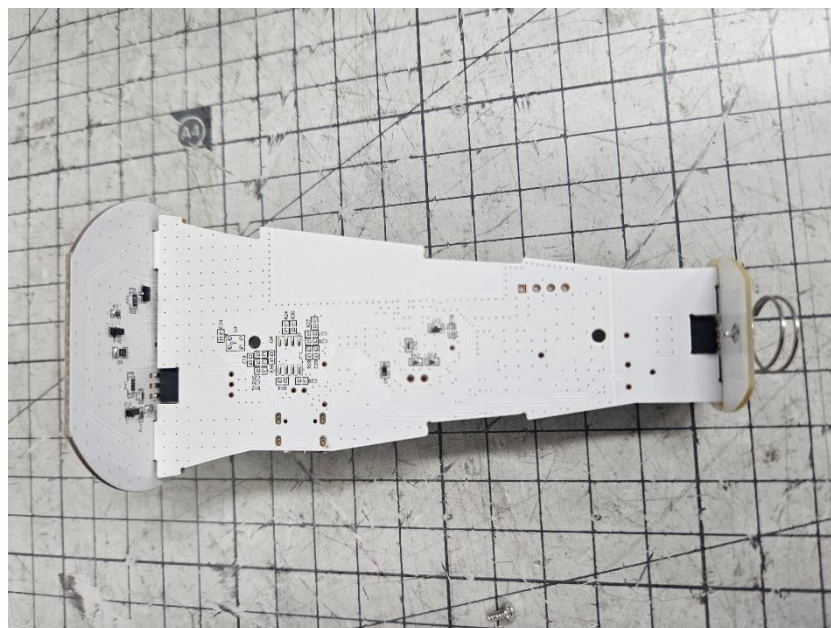

Test Report No.: NE2410-F003

211-71 Geumgok Road, Dongtan-myeon, Hwaseong-si, Gyeonggi-do, Republic of Korea
www.nct.re.kr TEL: +82-31-323-6070 FAX : +82-31-323-6071