



ELECTROMAGNETIC RESEARCH INSTITUTE

EMI TEST REPORT

Emission of electromagnetic disturbance

Test Report No. : ERI-FCC03-0020
Equipment : MP3 Player
Name of basic model : iHP-100
Family model : iHP-150, iHP-200, iHP-250
Manufacturer : iRiver CO., LTD.
Applicant : H.J. Mun
Tested date : 2003. 4. 8 - 4. 16
Issued date : 2003. 4. 16
Test results : PASS
Test Standards : FCC Part 15 Subpart B (Class B)

Test Procedure and Items :

- AC Power line Conducted emissions measurement : ANSI C63.4-1992
- Radiated emissions measurement : ANSI C63.4-1992

Tested by: GWEON, HUR

Approved by: UK-CHO, RIM

The results in this report apply only to the sample tested.

This test report shall not be reproduced except in full, without the written approval of **ERI Laboratory**.

CONTENTS

1. CLIENT INFORMATION...	3
2. LABORATORY INFORMATION...	3
3. EQUIPMENT UNDER TEST INFORMATION(EUT)	3
3.1 Identification of the EUT	3
3.2 Additional information about the EUT	4
3.3 Peripheral equipment	4
4. CONTINUOUS DISTURBANCE VOLTAGE, MAIN TERMINAL	5
4.1 Operating environment	5
4.2 Test set-up and test procedures	5
4.3 Test instrument	5
4.4 Test results<Play mode>	6
4.5 Test results(FM tuner>	8
5. RADIATED DISTURBANCE : 30MHz – 1000MHz	10
5.1 Operating environment	10
5.2 Test set-up	10
5.3 Test conditions	10
5.4 Test instrument	10
5.5 Test results(Download mode)	11
5.6 Test results(Play mode)	11
5.7 Test results(FM tuner)	12

1. CLIENT INFORMATION

The EUT has been tested by request of :

Company : iRiver CO., LTD.

Address : 8F Posgen VentureTower, 1586-7 Seocho-dong, Seocho-gu,
Seoul, Korea

Name of contact : Gi-Yeon, Lee

Telephone : +82-2-3019-1723

Facsimile : +82-2-3019-1746

2. LABORATORY INFORMATION

The 10m semi-anechoic chamber and/or EMC facilities are used for these testing.
These facilities were accredited by KOLAS, EK, MIC of Korea and FCC of USA.

Address

ELECTROMAGNETIC RESEARCH INSTITUTE.

66-6, JEIL-RI, YANGJI-MYUN, YOUNGIN-CITY, KYUNGGI-DO, KOREA

Telephone No. : +82-31-336-1186~7

Facsimile No. : +82-31-336-1184

Registered No.

KOLAS : 111

EK : J

MIC : KR0030

FCC Filing No. : 302567

3. EQUIPMENT UNDER TEST INFORMATION(EUT)

3.1 Identification of the EUT

Type of equipment : MP3 Player

Model name : iHP-100

Brand name : N/A

Manufacturer : AV CHASEWAY MFG.FTY.

Address : Langang Village, Chongguang Town, Baoan District,
Shenzhen City, Guangdong, China

Telephone : +86-755-708-4671

Facsimile : +86-755-708-5490

Country of origin : CHINA

Rating : DC 5V



3.2 Additional information about the EUT

Class B, Family Models List:

Basic Model	Variant Model	Differential point	Remark
iHP-100	iHP-150	Model name	-
	iHP-200	Model name	-
	iHP-250	Model name	-

3.3 Peripheral equipment

Defined as equipment needed for correct operation of the EUT.


Description	Model No.	Serial No.	Manufacture
NOTE PC	CP149702-01	R3100684	Fujitsu limited.
AC/DC adaptor	SEB80N2-16	03211289B	Sanken electronic Co., Ltd.
FDD	FPCFDD12	B1131NI0106	-
AC/DC adaptor	RHC-050200-L	-	-
Monitor	S7E	P181H80R907989	-
Printer	HP930C	CN17D1BOS9	-

4. CONTINUOUS DISTURBANCE VOLTAGE, MAIN TERMINAL : Frequency range 0.15 MHz to 30 MHz

4.1 Operating environment

Temperature : 22.0 °C
Relative Humidity : 30.0 %

4.2 Test set-up and test procedures

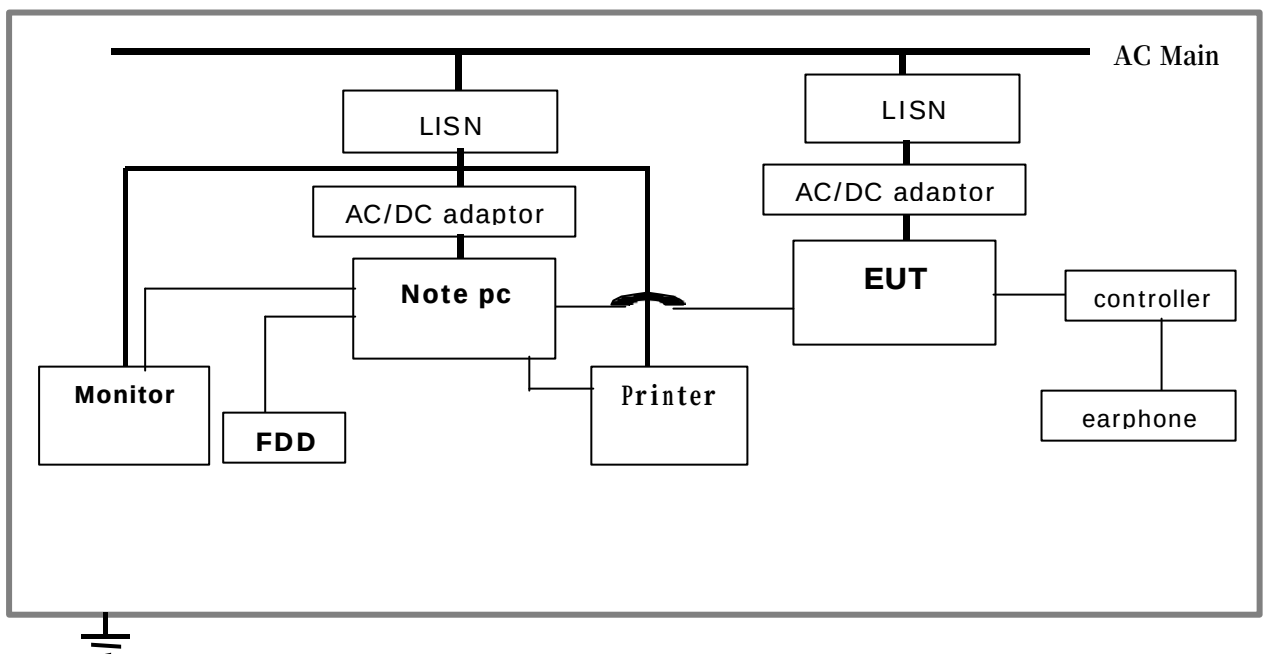

The mains terminal disturbance voltage was measured with the equipment under test(EUT) in a shield room. The EUT was connected to an artificial mains network(LISN) placed on the floor. The EUT was placed on non-metallic table 0.4m above the metallic, grounded floor. The distance to other metallic surface was at least 0.8m.

Amplitude measurements were performed with a quasi-peak detector and an average detector.

Operation condition : Play and download mode

4.3 Test instrument

Instrument	Model No.	Serial No.	Makers	Next cal.date	Used
Test receiver	ESCS30	100021	R&S	2004. 1. 24	X
L.I.S.N.	ESH3-Z5	827246/008	R&S	2004. 3. 19	X
	ESH3-Z5	831887/018	R&S	2004. 3. 19	
Shield room	8 × 6 × 3.3m/H	-	-	-	X

4.4 Test results<Play mode>

Date of test : Apr 8, 2003.

An overview sweep performed with peak detector & average detector are included in the report **as test reports.**


Frequency Range [MHz]	Tested Freq. [MHz]	LISN	Meter Reading		Limits		Margin	
			QP	AV	QP	AV	QP	AV
			[dBuV]		[dBuV]		[dBuV]	
0.15-30	0.150	N	35.9	4.6	66.0	56.0	30.1	51.4
	0.275	H	28.0	27.9	61.0	51.0	33.0	23.1
	0.280	H	37.3	26.8	60.8	50.8	23.5	24.0
	0.482	H	27.1	5.2	56.4	46.4	29.3	41.2
	0.530	N	35.8	2.7	56.0	46.0	20.2	43.3
	0.540	N	26.3	18.3	56.0	46.0	29.7	27.7
	0.610	N	37.7	10.5	56.0	46.0	18.3	35.5
	1.105	H	31.8	17.5	56.0	46.0	24.2	28.5
	6.080	H	26.6	12.7	60.0	50.0	33.4	37.3
	6.390	H	27.0	14.9	60.0	50.0	33.0	35.1

* <5 : mean less than 5dB


* other frequency keep over 20dB margin.

Result: Pass

The measured emissions level of the EUT have found the below of the specified limit.

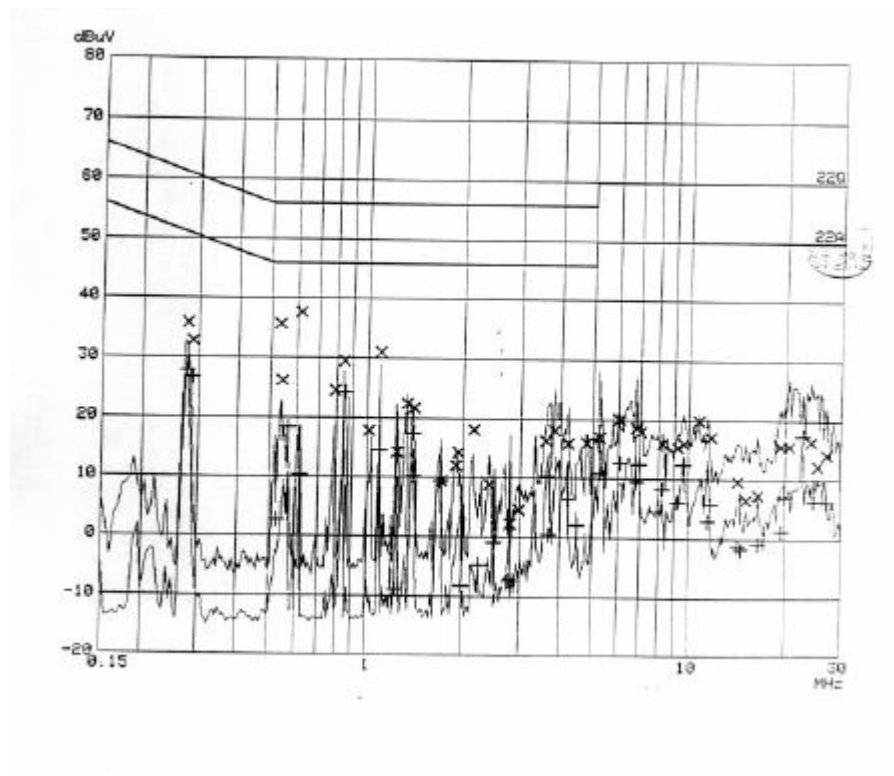

[Neutral line]

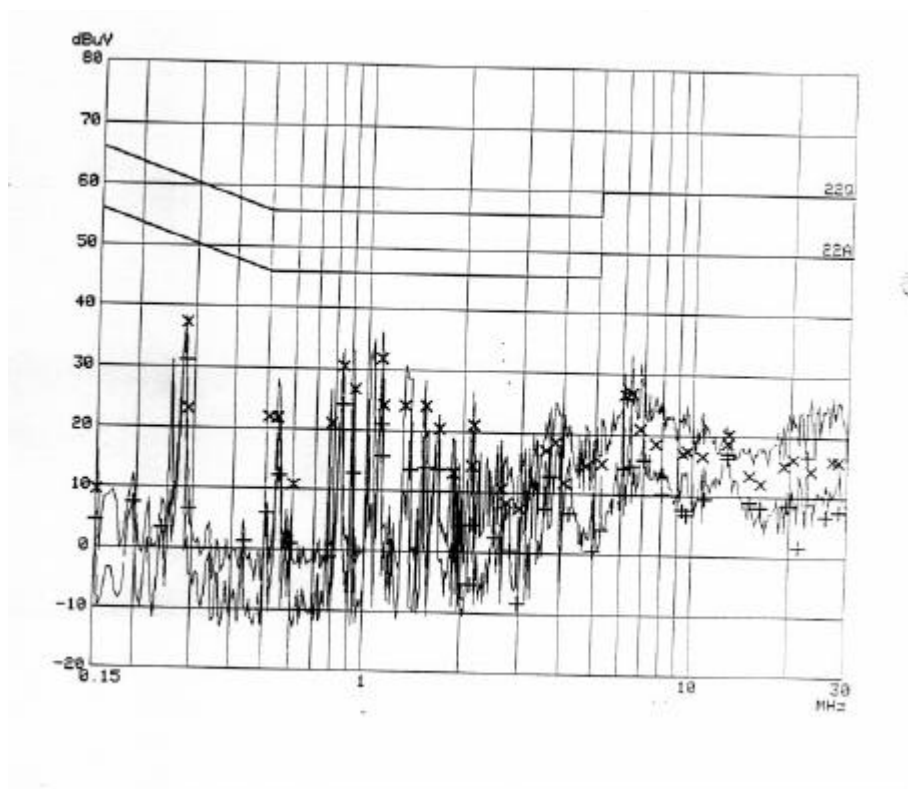

[Hot line]

4.5 Test results<Download mode>

Date of test : Apr 8, 2003.

An overview sweep performed with peak detector & average detector are included in the report **as test reports**.


Frequency Range [MHz]	Tested Freq. [MHz]	LISN	Meter Reading		Limits		Margin	
			QP	AV	QP	AV	QP	AV
			[dBuV]		[dBuV]		[dBuV]	
0.15-30	0.270	N	47.9	47.9	61.1	51.1	13.2	3.2
	0.540	N	37.2	37.3	56.0	46.0	18.8	8.7
	0.807	N	35.2	34.8	56.0	46.0	20.8	11.2
	1.083	N	35.7	34.5	56.0	46.0	20.3	11.5
	1.617	N	34.3	32.4	56.0	46.0	21.7	13.6

* <5 : mean less than 5dB


* other frequency keep over 20dB margin.

Result: Pass

The measured emissions level of the EUT have found the below of the specified limit.

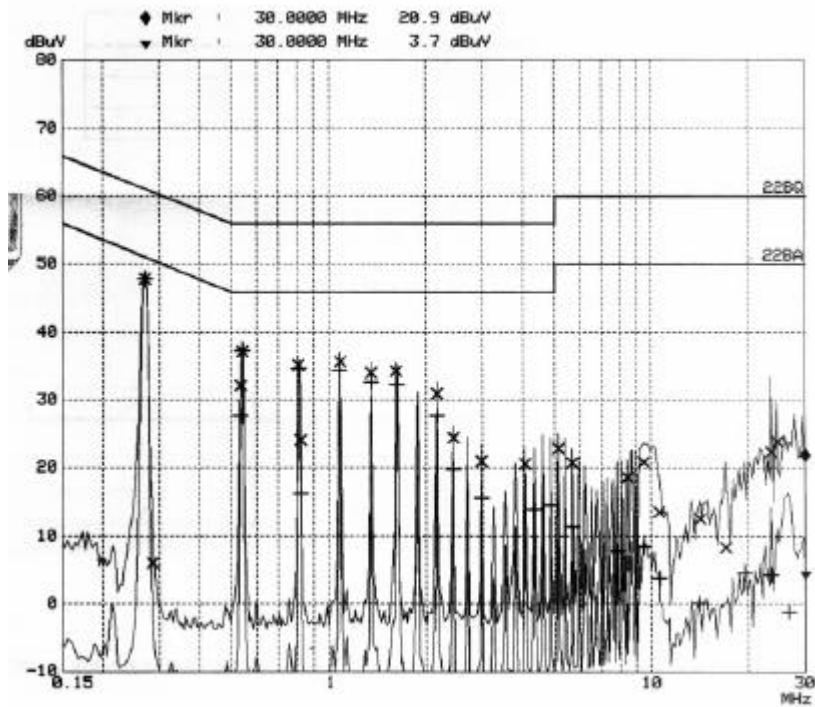

[Neutral line]

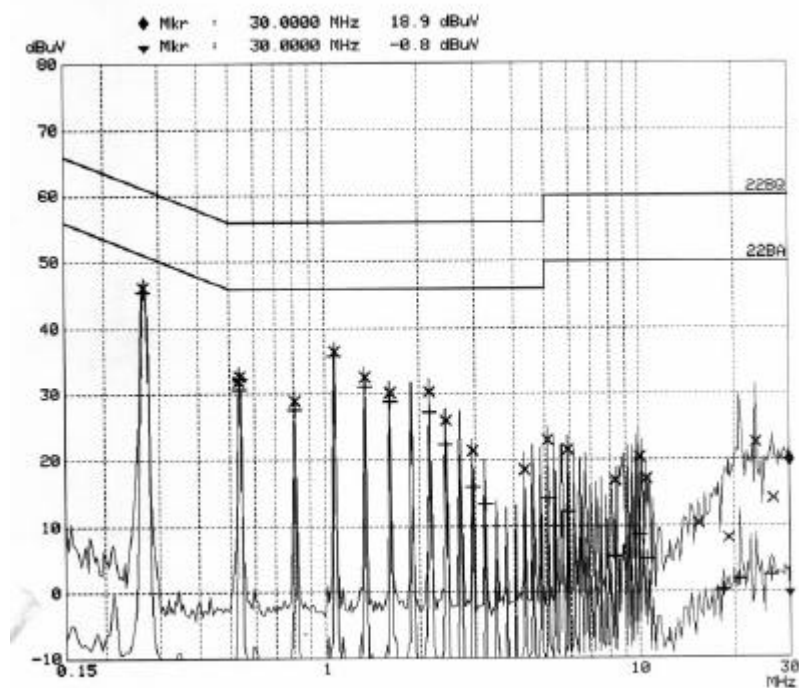


[Hot line]

5. RADIATED DISTURBANCE : 30MHz – 1000MHz

5.1 Operating environment

Temperature : 20.0 °C
Relative Humidity : 39.0 %

5.2 Test set-up

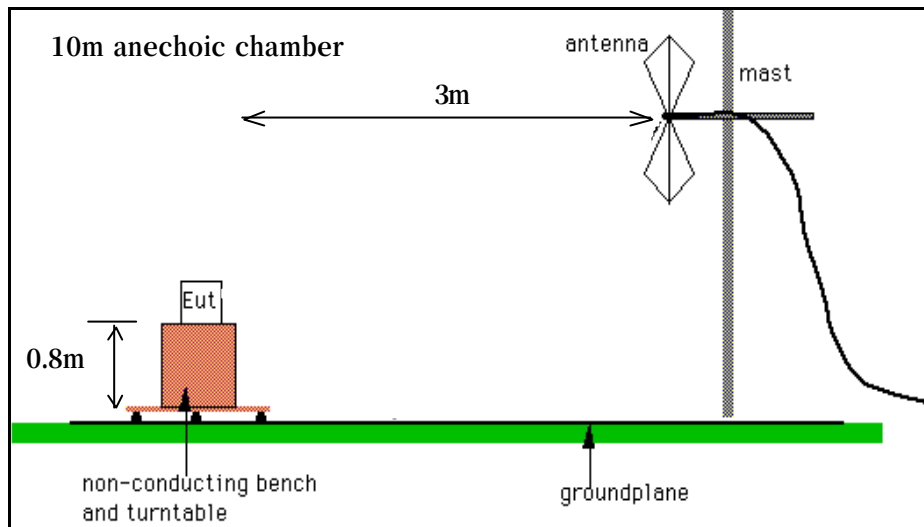

<General test set-up for radiated emissions>

5.3 Operation Conditions

Download and play mode

5.4 Test instrument

Instrument	Model No.	Serial No.	Makers	Next cal.date	Used
Test receiver	ESCS30	100021	R&S	2004. 1. 24	x
L.I.S.N.	ESH3-Z5	827246/008	R&S	2004. 3. 19	x
	ESH3-Z5	831887/018	R&S	2004. 3. 19	
Anechoic chamber	8 × 6 × 3.3m/H	-	Daetong shield	-	x

5.5 Test results(Download mode)

Date of test: Apr 8, 2003.

Freq (MHz)	Reading <Quasi-Peak> (dBuV)	Ant	AF (dB)	CL (dB)	Result (dBuV / m)	Limit (dB)	Margin (dB)
129.90	15.47	V	13.10	2.60	31.17	43.50	12.33
195.40	14.43	H	16.35	3.10	33.88	43.50	9.62
208.90	17.21	H	16.29	3.20	36.70	43.50	6.80
220.40	13.77	H	16.70	3.50	33.97	46.00	12.03
240.60	20.89	H	17.10	3.50	41.49	46.00	4.51
260.20	19.26	V	17.70	3.50	40.46	46.00	5.54
280.40	16.45	H	18.45	3.70	38.60	46.00	7.40
397.43	19.09	H	14.31	3.80	37.20	46.00	8.80
420.33	17.03	H	15.87	4.10	37.00	46.00	9.00
662.10	16.20	V	19.50	5.50	41.20	46.00	4.80
715.00	14.93	V	20.06	5.20	40.19	46.00	5.81
846.00	11.82	V	20.84	5.90	38.56	46.00	7.44

* Receiving Antenna Mode : **Horizontal, Vertical**

* <5 : mean less than 5dB

Note : Reading = Test Receiver meter, P= Polarization → POL H = Horizontal POL V = Vertical A = Angle, AF = Antenna Factor CL = Cable Loss Result = Field Strength(AF + CL+ Reading)

Result : Pass

The measured emissions level of the EUT have found the below of the specified limit.

5.6 Test results(Play mode)

Date of test: Apr 8, 2003.

Freq (MHz)	Reading <Quasi-Peak> (dBuV)	Ant	AF (dB)	CL (dB)	Result (dBuV / m)	Limit (dB)	Margin (dB)
36.10	8.34	V	16.52	1.60	26.46	40.0	13.54
182.60	7.06	V	16.22	3.00	26.28	43.5	17.22
287.90	2.88	H	18.45	3.70	25.03	46.0	20.97
381.00	8.81	V	14.31	3.80	26.92	46.0	19.08

* Receiving Antenna Mode : **Horizontal, Vertical**

* <5 : mean less than 5dB

Note : Reading = Test Receiver meter, P= Polarization → POL H = Horizontal POL V = Vertical A = Angle, AF = Antenna Factor CL = Cable Loss Result = Field Strength(AF + CL+ Reading)

Result : Pass

The measured emissions level of the EUT have found the below of the specified limit.

5.7 Test results(FM tuner)

T.	Tested	Meter Reading <Quasi-Peak>	Total	Results	Margins	Limits
Frequency	Frequency	[dBuV/m]	Loss	[dBuV/m]	[dBuV/m]	
[MHz]	[MHz]	[A]	[B]	[A+B]	[C] - [A+B]	[C]
87.5	98.20	4.23	12.31	15.75	-	43.5
	196.40	<5	19.05	-	-	43.5
	294.60	<5	22.53	-	-	46.0
	392.80	<5	20.07	-	-	46.0
	491.00	3.22	21.64	24.26	-	46.0
	589.20	<5	23.72	-	-	46.0
	687.40	<5	25.19	-	-	46.0
	785.60	2.38	26.39	28.16	-	46.0
	883.80	<5	27.28	-	-	46.0
	982.00	0.75	29.15	29.55	-	54.0
98.0	108.70	<5	13.69	-	-	43.5
	217.40	1.27	19.60	20.97	-	46.0
	326.10	6.11	17.55	23.81	-	46.0
	434.80	<5	18.11	-	-	46.0
	543.50	4.24	23.16	26.28	-	46.0
	652.20	<5	24.70	-	-	46.0
	760.90	<5	25.98	-	-	46.0
	869.60	0.47	27.61	28.18	-	46.0
	978.30	<5	29.15	-	-	54.0
108.0	118.70	<5	14.52	-	-	43.5
	237.40	<5	20.20	-	-	46.0
	356.10	3.21	18.11	21.32	-	46.0
	474.80	<5	21.36	-	-	46.0
	593.50	1.91	24.08	25.07	-	46.0
	712.20	<5	25.56	-	-	46.0
	830.90	1.29	27.28	28.03	-	46.0
	949.60	1.34	28.70	29.60	-	54.0
* Receiving Antenna Mode : Horizontal, Vertical * 10m chamber, Total Loss: Antenna factor[dB]+Cable loss[dB] * <5 : mean less than 5dB * Measurement uncertainty (K=2) 30-300MHz : +3.96dB / -4.04dB 300-1000MHz : +3.04dB / -3.00dB						

Result : Pass

The measured emissions level of the EUT have found the below of the specified limit.