




System / software:	SARA2 / 2.3 VPM	Input Power Drift:	
Date / Time:	6/15/2005 3:57:09 PM	DUT Battery Model/No:	
Filename:	tab_main149lap_3d.txt	Probe Serial Number:	0123
Ambient Temperature:	22.0°C	Liquid Simulant:	5200
Device Under Test:	Broadcom Bcm94318MPAGH	Relative Permittivity:	47.66
Relative Humidity:	50%	Conductivity:	5.462
Phantom S/No:	HeadBox_new_spout.c sv	Liquid Temperature:	22.0°C
Phantom Rotation:	0°	Max SAR Y-axis Location:	-30.00 mm
DUT Position:	lap	Max SAR Z-axis Location:	-182.40 mm
Antenna Configuration:	Main normal configuration	Max E Field:	2.11 V/m
Test Frequency:	5260MHz	SAR 1g:	0.033 W/kg
Air Factors:	346 / 318 / 386		
Conversion Factors:	0.840 / 0.840 / 0.840	SAR Start:	0.008 W/kg
Type of Modulation:		SAR End:	0.008 W/kg
Modn. Duty Cycle:		SAR Drift during Scan:	0.00 dB
Diode Compression Factors (V*200):	19 / 19 / 19	Probe battery last changed:	5/27/05
Input Power Level:	max	Extrapolation:	poly4

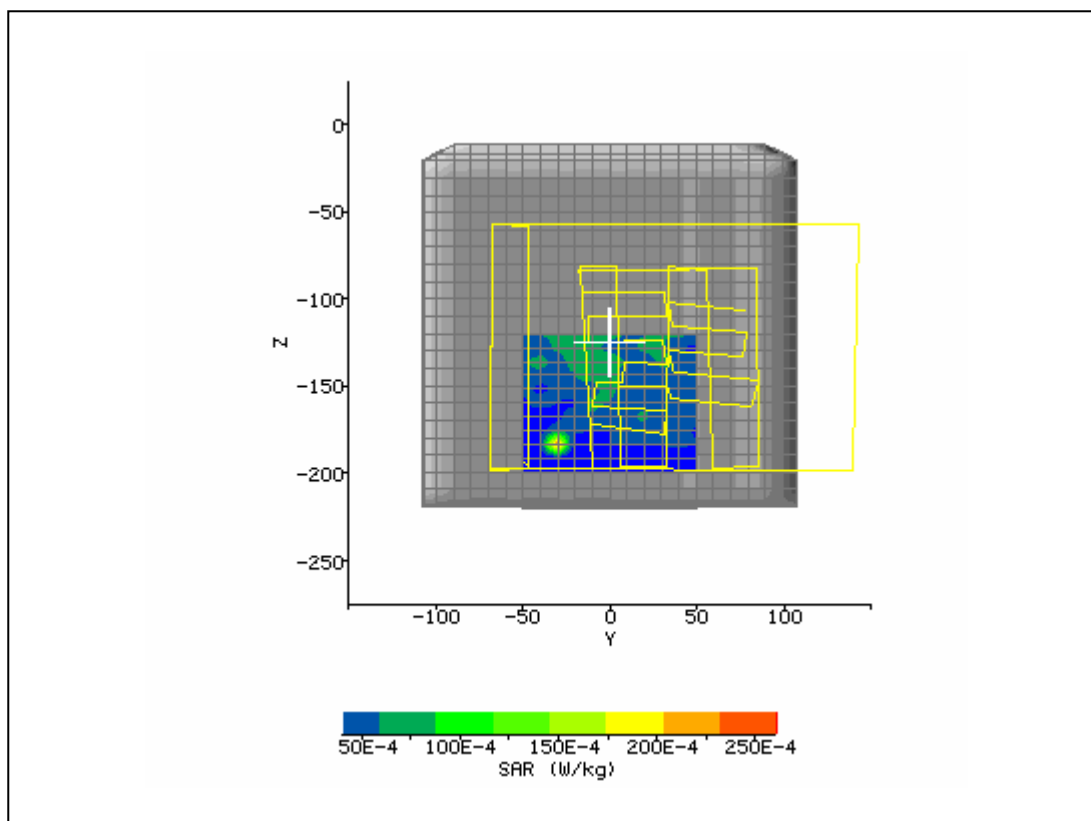


System / software:	SARA2 / 2.3 VPM	Input Power Drift:	
Date / Time:	6/13/2005 11:42:45 AM	DUT Battery Model/No:	
Filename:	tab_Aux13lap_3d.txt	Probe Serial Number:	0123
Ambient Temperature:	22.0°C	Liquid Simulant:	5200
Device Under Test:	Broadcom	Relative Permittivity:	47.66
Relative Humidity:	50%	Conductivity:	5.462
Phantom S/No:	HeadBox_new_spout.csv	Liquid Temperature:	22.0°C
Phantom Rotation:	0°	Max SAR Y-axis Location:	8.00 mm
DUT Position:	Lap	Max SAR Z-axis Location:	-150.40 mm
Antenna Configuration:	Main tablet configuration	Max E Field:	4.20 V/m
Test Frequency:	5260MHz	SAR 1g:	0.090 W/kg
Air Factors:	346 / 318 / 386		
Conversion Factors:	0.840 / 0.840 / 0.840	SAR Start:	0.058 W/kg
Type of Modulation:		SAR End:	0.058 W/kg
Modn. Duty Cycle:		SAR Drift during Scan:	0.00dB
Diode Compression Factors (V*200):	19 / 19 / 19	Probe battery last changed:	5/27/05
Input Power Level:	max	Extrapolation:	poly4

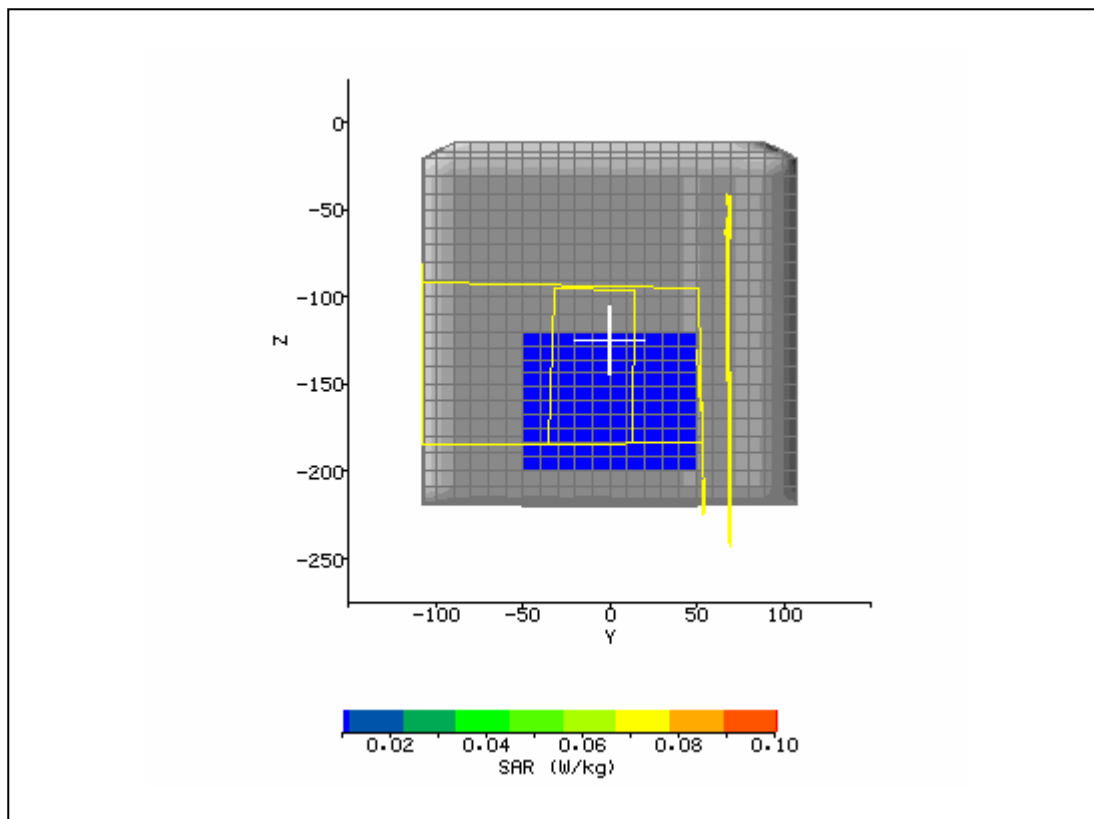


System / software:	SARA2 / 2.3 VPM	Input Power Drift:	
Date / Time:	6/13/2005 12:57:12 PM	DUT Battery Model/No:	
Filename:	tab_main52lap_3d.txt	Probe Serial Number:	0123
Ambient Temperature:	22.0°C	Liquid Simulant:	5200
Device Under Test:	Broadcom	Relative Permittivity:	47.66
Relative Humidity:	50%	Conductivity:	5.462
Phantom S/No:	HeadBox_new_spout.csv	Liquid Temperature:	22.0°C
Phantom Rotation:	0°	Max SAR Y-axis Location:	1.00 mm
DUT Position:	Lap	Max SAR Z-axis Location:	-120.00 mm
Antenna Configuration:	Aux tablet configuration	Max E Field:	2.05 V/m
Test Frequency:	5260MHz	SAR 1g:	0.028 W/kg
Air Factors:	346 / 318 / 386		
Conversion Factors:	0.840 / 0.840 / 0.840	SAR Start:	0.012 W/kg
Type of Modulation:		SAR End:	0.012 W/kg
Modn. Duty Cycle:		SAR Drift during Scan:	0.01 dB
Diode Compression Factors (V*200):	19 / 19 / 19	Probe battery last changed:	5/27/05
Input Power Level:	max	Extrapolation:	poly4

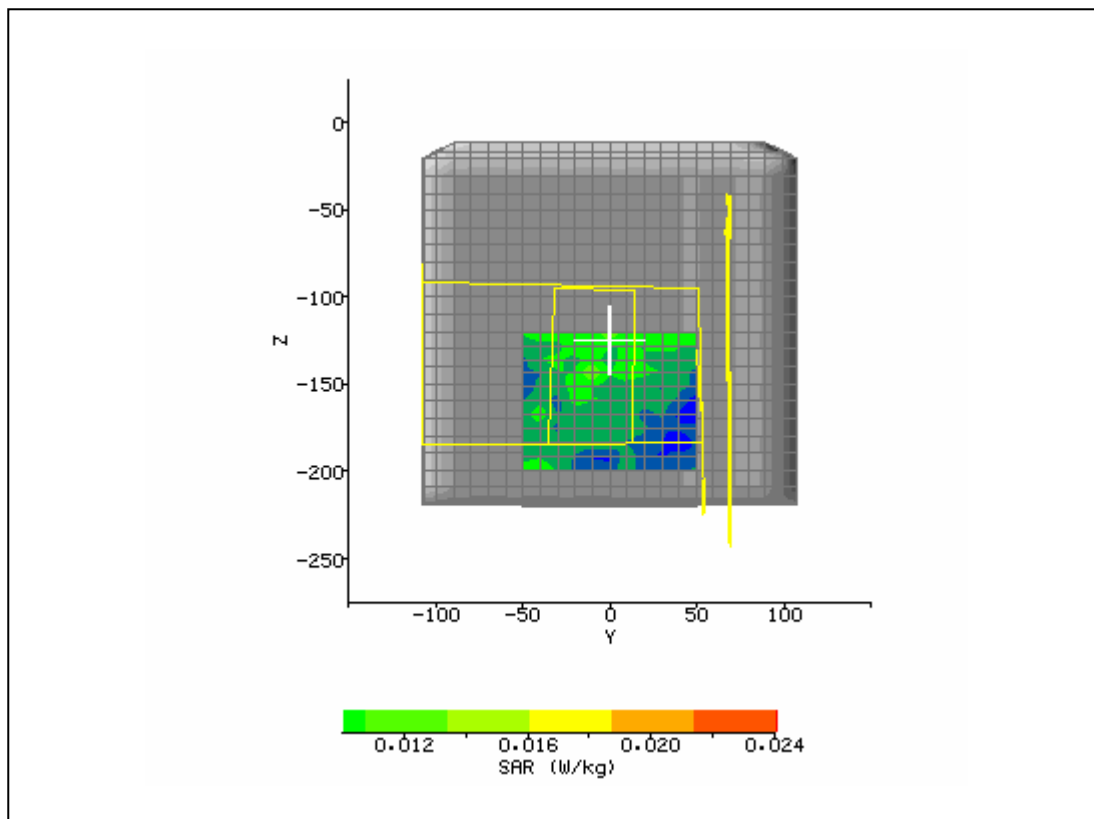


System / software:	SARA2 / 2.3 VPM	Input Power Drift:	
Date / Time:	6/13/2005 3:43:25 PM	DUT Battery Model/No:	
Filename:	tab_aux52lap_3d.txt	Probe Serial Number:	0123
Ambient Temperature:	22.0°C	Liquid Simulant:	5200
Device Under Test:	Broadcom	Relative Permittivity:	48.07
Relative Humidity:	50%	Conductivity:	5.393
Phantom S/No:	HeadBox_new_spout.c sv	Liquid Temperature:	22.0°C
Phantom Rotation:	0°	Max SAR Y-axis Location:	-24.00 mm
DUT Position:	Lap	Max SAR Z-axis Location:	-147.20 mm
Antenna Configuration:	Main tablet configuration	Max E Field:	4.34 V/m
Test Frequency:	5180MHz	SAR 1g:	0.090 W/kg
Air Factors:	346 / 318 / 386		
Conversion Factors:	0.840 / 0.840 / 0.840	SAR Start:	0.071 W/kg
Type of Modulation:		SAR End:	0.071 W/kg
Modn. Duty Cycle:		SAR Drift during Scan:	0.01 dB
Diode Compression Factors (V*200):	19 / 19 / 19	Probe battery last changed:	5/27/05
Input Power Level:	max	Extrapolation:	poly4

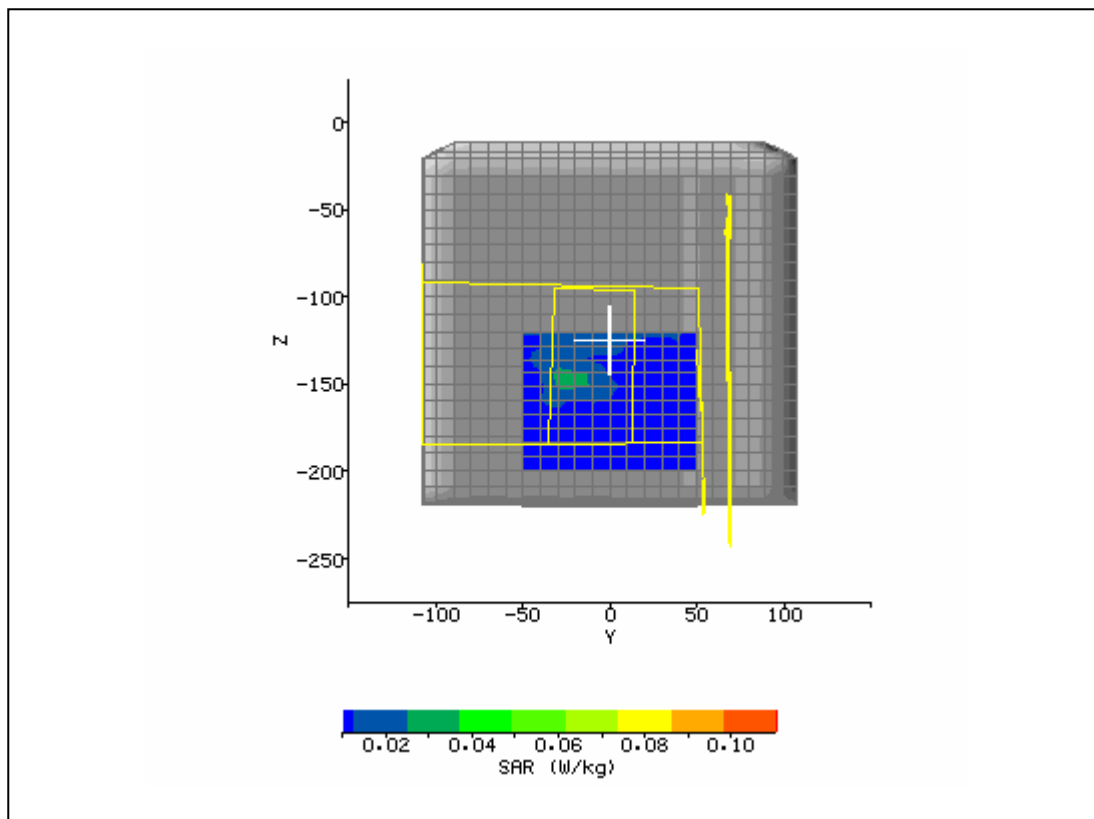


System / software:	SARA2 / 2.3 VPM	Input Power Drift:	
Date / Time:	6/13/2005 4:12:39 PM	DUT Battery Model/No:	
Filename:	tab_main36lap_3d.txt	Probe Serial Number:	0123
Ambient Temperature:	22.0°C	Liquid Simulant:	5200
Device Under Test:	Broadcom	Relative Permittivity:	47.70
Relative Humidity:	50%	Conductivity:	5.470
Phantom S/No:	HeadBox_new_spout.csv	Liquid Temperature:	22.0°C
Phantom Rotation:	0°	Max SAR Y-axis Location:	-4.00 mm
DUT Position:	Lap	Max SAR Z-axis Location:	-148.80 mm
Antenna Configuration:	Main tablet configuration	Max E Field:	4.08 V/m
Test Frequency:	5320MHz	SAR 1g:	0.077 W/kg
Air Factors:	346 / 318 / 386		
Conversion Factors:	0.840 / 0.840 / 0.840	SAR Start:	0.073 W/kg
Type of Modulation:		SAR End:	0.073 W/kg
Modn. Duty Cycle:		SAR Drift during Scan:	0.00 dB
Diode Compression Factors (V*200):	19 / 19 / 19	Probe battery last changed:	5/27/05
Input Power Level:	max	Extrapolation:	poly4

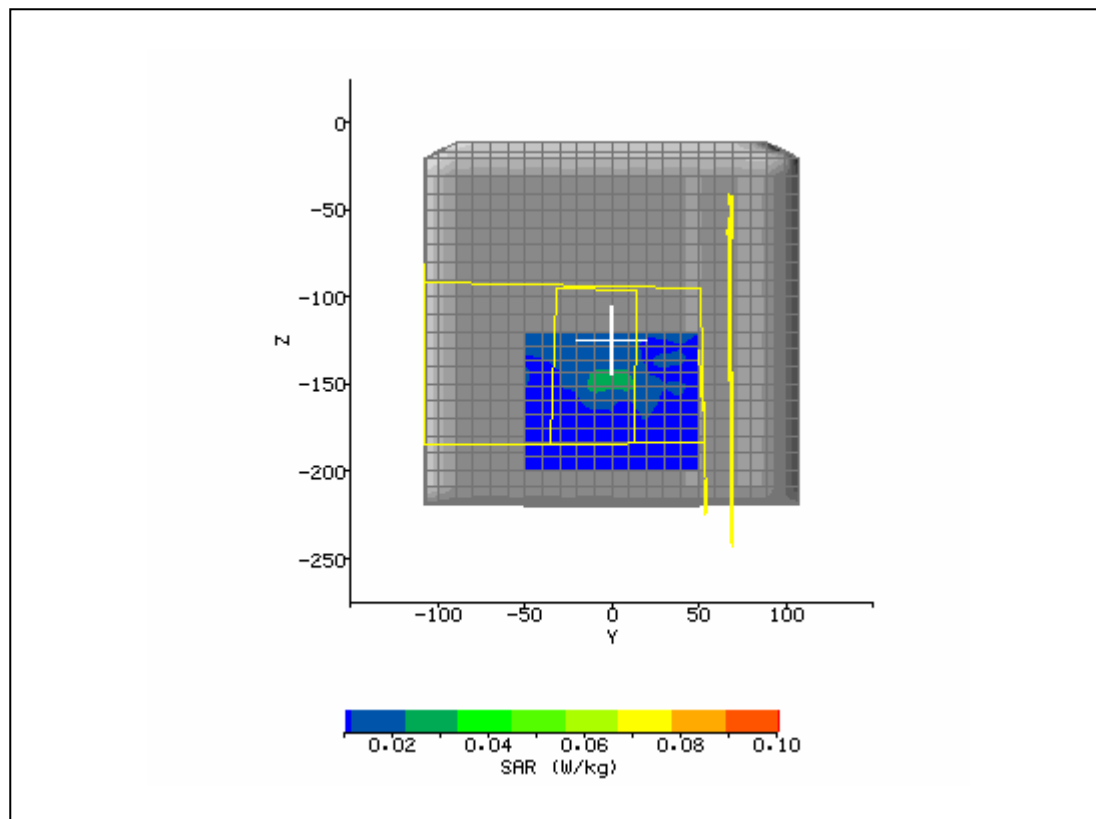


System / software:	SARA2 / 2.3 VPM	Input Power Drift:	
Date / Time:	6/15/2005 8:21:33 AM	DUT Battery Model/No:	
Filename:	temp.txt	Probe Serial Number:	0123
Ambient Temperature:	22.0°C	Liquid Simulant:	5800
Device Under Test:	Broadcom Bcm94318MPAGH	Relative Permittivity:	47.01
Relative Humidity:	50%	Conductivity:	6.431
Phantom S/No:	HeadBox_new_spout.c sv	Liquid Temperature:	22.0°C
Phantom Rotation:	0°	Max SAR Y-axis Location:	12.00 mm
DUT Position:	lap	Max SAR Z-axis Location:	-188.80 mm
Antenna Configuration:	main normal configuration	Max E Field:	3.50 V/m
Test Frequency:	5765MHz	SAR 1g:	0.078 W/kg
Air Factors:	346 / 318 / 386		
Conversion Factors:	0.750 / 0.750 / 0.750	SAR Start:	0.057 W/kg
Type of Modulation:		SAR End:	0.055 W/kg
Modn. Duty Cycle:		SAR Drift during Scan:	-0.15 dB
Diode Compression Factors (V*200):	19 / 19 / 19	Probe battery last changed:	5/27/05
Input Power Level:	max	Extrapolation:	poly4

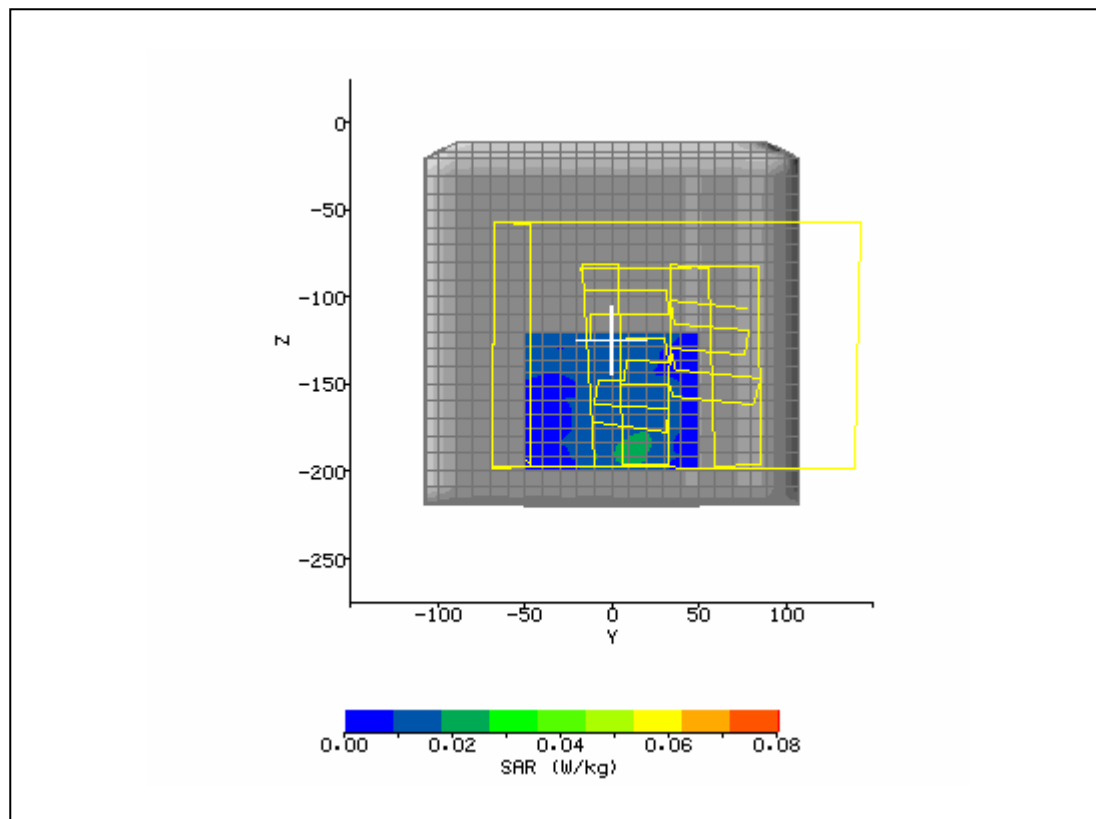


System / software:	SARA2 / 2.3 VPM	Input Power Drift:	
Date / Time:	6/15/2005 8:56:59 AM	DUT Battery Model/No:	
Filename:	norm_main153lap_3d.txt	Probe Serial Number:	0123
Ambient Temperature:	22.0°C	Liquid Simulant:	5800
Device Under Test:	Broadcom Bcm94318MPAGH	Relative Permittivity:	47.01
Relative Humidity:	50%	Conductivity:	6.431
Phantom S/No:	HeadBox_new_spout.csv	Liquid Temperature:	22.0°C
Phantom Rotation:	0°	Max SAR Y-axis Location:	-41.00 mm
DUT Position:	lap	Max SAR Z-axis Location:	-177.50 mm
Antenna Configuration:	main tablet configuration	Max E Field:	4.38 V/m
Test Frequency:	5765MHz	SAR 1g:	0.091 W/kg
Air Factors:	346 / 318 / 386		
Conversion Factors:	0.750 / 0.750 / 0.750	SAR Start:	0.070 W/kg
Type of Modulation:		SAR End:	0.071 W/kg
Modn. Duty Cycle:		SAR Drift during Scan:	0.06 dB
Diode Compression Factors (V*200):	19 / 19 / 19	Probe battery last changed:	5/27/05
Input Power Level:	max	Extrapolation:	poly4

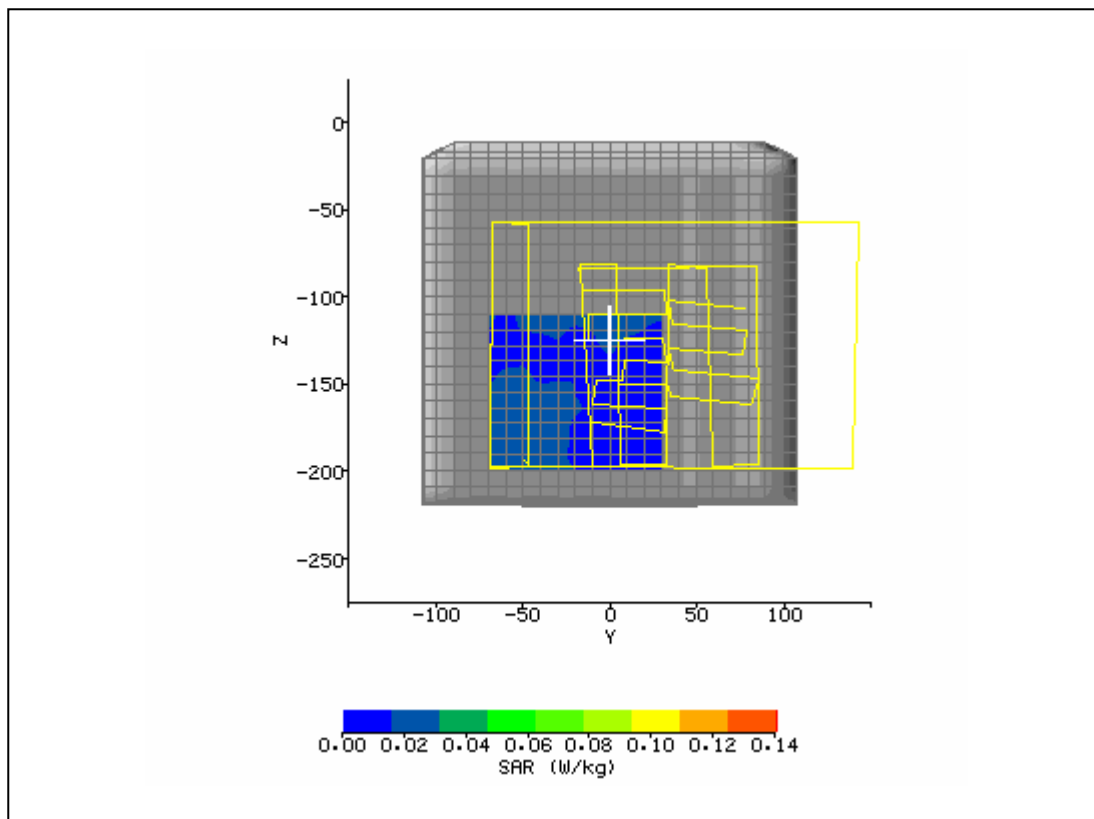

System / software:	SARA2 / 2.3 VPM	Input Power Drift:	
Date / Time:	6/15/2005 10:02:13 AM	DUT Battery Model/No:	
Filename:	tab_main153lap_3d.txt	Probe Serial Number:	0123
Ambient Temperature:	22.0°C	Liquid Simulant:	5800
Device Under Test:	Broadcom Bcm94318MPAGH	Relative Permittivity:	47.01
Relative Humidity:	50%	Conductivity:	6.431
Phantom S/No:	HeadBox_new_spout.c sv	Liquid Temperature:	22.0°C
Phantom Rotation:	0°	Max SAR Y-axis Location:	12.00 mm
DUT Position:	lap	Max SAR Z-axis Location:	-140.00 mm
Antenna Configuration:	Aux tablet configuration	Max E Field:	3.28 V/m
Test Frequency:	5765MHz	SAR 1g:	0.057 W/kg
Air Factors:	346 / 318 / 386		
Conversion Factors:	0.750 / 0.750 / 0.750	SAR Start:	0.013 W/kg
Type of Modulation:		SAR End:	0.013 W/kg
Modn. Duty Cycle:		SAR Drift during Scan:	-0.03 dB
Diode Compression Factors (V*200):	19 / 19 / 19	Probe battery last changed:	5/27/05
Input Power Level:	max	Extrapolation:	poly4

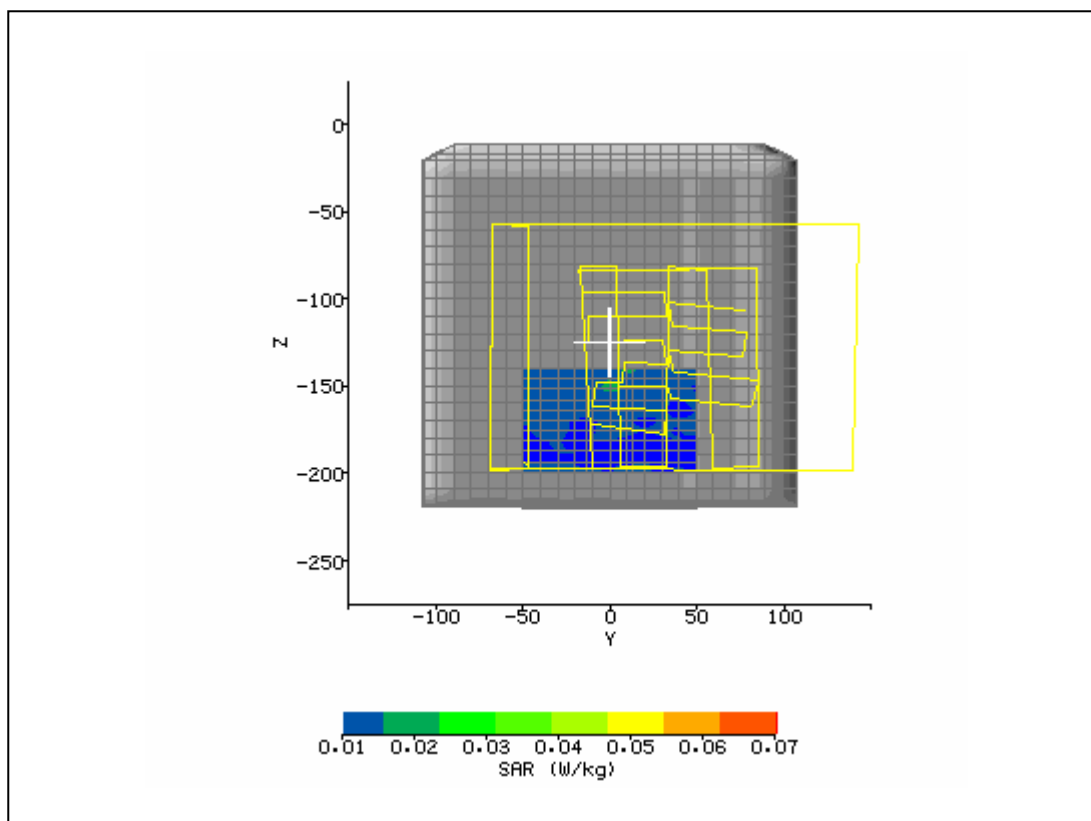

System / software:	SARA2 / 2.3 VPM	Input Power Drift:	
Date / Time:	6/15/2005 2:19:27 PM	DUT Battery Model/No:	
Filename:	tab_main165lap_3d.txt	Probe Serial Number:	0123
Ambient Temperature:	22.0°C	Liquid Simulant:	5800
Device Under Test:	Broadcom Bcm94318MPAGH	Relative Permittivity:	47.39
Relative Humidity:	50%	Conductivity:	6.435
Phantom S/No:	HeadBox_new_spout.c sv	Liquid Temperature:	22.0°C
Phantom Rotation:	0°	Max SAR Y-axis Location:	-22.00 mm
DUT Position:	lap	Max SAR Z-axis Location:	-168.00 mm
Antenna Configuration:	Main tablet configuration	Max E Field:	3.48 V/m
Test Frequency:	5745MHz	SAR 1g:	0.062 W/kg
Air Factors:	346 / 318 / 386		
Conversion Factors:	0.750 / 0.750 / 0.750	SAR Start:	0.039 W/kg
Type of Modulation:		SAR End:	0.038 W/kg
Modn. Duty Cycle:		SAR Drift during Scan:	-0.11 dB
Diode Compression Factors (V*200):	19 / 19 / 19	Probe battery last changed:	5/27/05
Input Power Level:	max	Extrapolation:	poly4

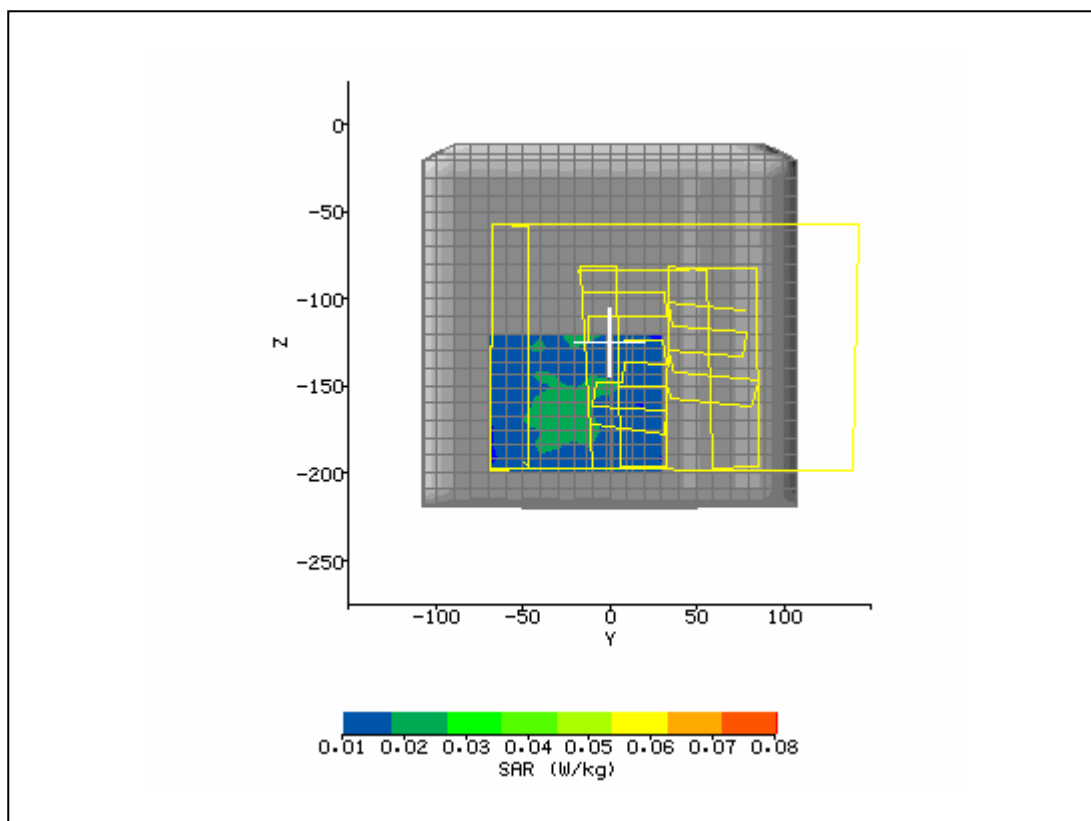

System / software:	SARA2 / 2.3 VPM	Input Power Drift:	
Date / Time:	6/15/2005 1:39:34 PM	DUT Battery Model/No:	
Filename:	tab_main149lap_3d.txt	Probe Serial Number:	0123
Ambient Temperature:	22.0°C	Liquid Simulant:	5800
Device Under Test:	Broadcom Bcm94318MPAGH	Relative Permittivity:	46.91
Relative Humidity:	50%	Conductivity:	6.433
Phantom S/No:	HeadBox_new_spout.c sv	Liquid Temperature:	22.0°C
Phantom Rotation:	0°	Max SAR Y-axis Location:	-42.00 mm
DUT Position:	lap	Max SAR Z-axis Location:	-160.00 mm
Antenna Configuration:	Main tablet configuration	Max E Field:	4.31 V/m
Test Frequency:	5825MHz	SAR 1g:	0.095 W/kg
Air Factors:	346 / 318 / 386		
Conversion Factors:	0.750 / 0.750 / 0.750	SAR Start:	0.056 W/kg
Type of Modulation:		SAR End:	0.056 W/kg
Modn. Duty Cycle:		SAR Drift during Scan:	-0.01 dB
Diode Compression Factors (V*200):	19 / 19 / 19	Probe battery last changed:	5/27/05
Input Power Level:	max	Extrapolation:	poly4

