



**FCC CFR47 PART 15 SUB PART C
CERTIFICATION**

TEST REPORT

FOR

BROADCOM 802.11g WIRELESS LAN PCI-E MINI CARD

MODEL NUMBER: BCM94311MCG

FCC ID: QDS-BRCM1020

REPORT NUMBER: 05U3484-1B

ISSUE DATE: JULY 21, 2005

Prepared for
**BOARDCOM CORP.
190 MATHILDA PLACE
SUNNYVALE, CA 94086, USA**

Prepared by
**COMPLIANCE CERTIFICATION SERVICES
561F MONTEREY ROAD
MORGAN HILL, CA 95037, USA
TEL: (408) 463-0885
FAX: (408) 463-0888**

NVLAP[®]
LAB CODE:200065-0

Revision History

Rev.	Revisions	Revised By
A	Initial Report	Thu
B	Added data for channels 2, 10 and 11 under Section 7.1.6. Corrected "Power = 19 dBm" to "Power = 12 dBm" for Channel 13 data under 7.2.2	Thu Thu

TABLE OF CONTENTS

1. TEST RESULT DECLARATION	4
2. TEST METHODOLOGY	5
3. FACILITIES AND ACCREDITATION	5
4. CALIBRATION AND UNCERTAINTY	5
4.1. MEASURING INSTRUMENT CALIBRATION	5
4.2. MEASUREMENT UNCERTAINTY.....	5
5. EQUIPMENT UNDER TEST	6
5.1. DESCRIPTION OF EUT	6
5.2. MAXIMUM OUTPUT POWER	6
5.3. DESCRIPTION OF AVAILABLE ANTENNAS.....	6
5.4. SOFTWARE AND FIRMWARE	6
5.5. WORST-CASE CONFIGURATION AND MODE.....	6
5.6. DESCRIPTION OF TEST SETUP	8
6. TEST AND MEASUREMENT EQUIPMENT	10
7. LIMITS AND RESULTS	11
7.1.1. 6 dB BANDWIDTH	11
7.1.2. 99% BANDWIDTH.....	18
7.1.3. PEAK OUTPUT POWER	25
7.1.4. MAXIMUM PERMISSIBLE EXPOSURE	38
7.1.5. AVERAGE POWER.....	41
7.1.6. PEAK POWER SPECTRAL DENSITY	42
7.1.7. CONDUCTED SPURIOUS EMISSIONS.....	54
7.2. RADIATED EMISSIONS.....	67
7.2.1. TRANSMITTER RADIATED SPURIOUS EMISSIONS	67
7.2.2. TRANSMITTER ABOVE 1 GHz FOR 2400 TO 2483.5 MHz BAND	70
7.2.3. WORST-CASE RADIATED EMISSIONS BELOW 1 GHz	108
7.3. POWERLINE CONDUCTED EMISSIONS	112
8. SETUP PHOTOS.....	116

1. TEST RESULT DECLARATION

COMPANY NAME: Broadcom Corp.
190 Mathilda Place
Sunnyvale, CA 94086, USA

EUT DESCRIPTION: Broadcom 802.11g Wireless LAN PCI-E Mini Card

MODEL: BCM94311MCG

SERIAL NUMBER: 120

DATE OF ORIGINAL TESTS: June 01 to June 16, 2005

APPLICABLE STANDARDS	
STANDARD	TEST RESULTS
FCC PART 15 SUBPART C	NO NON-COMPLIANCE NOTED

Compliance Certification Services, Inc. tested the above equipment in accordance with the requirements set forth in the above standards. The test results show that the equipment tested is capable of demonstrating compliance with the requirements as documented in this report.

Note: This document reports conditions under which testing was conducted and results of tests performed. This document may not be altered or revised in any way unless done so by Compliance Certification Services and all revisions are duly noted in the revisions section. Any alteration of this document not carried out by Compliance Certification Services will constitute fraud and shall nullify the document. No part of this report may be used to claim or imply product endorsement by NVLAP or any agency of the US Government.

Approved & released by:



THU CHAN
EMC SUPERVISOR
COMPLIANCE CERTIFICATION SERVICES

Original tests conducted by:



VIEN TRAN
EMC ENGINEER
COMPLIANCE CERTIFICATION SERVICES

2. TEST METHODOLOGY

The tests documented in this report were performed in accordance with ANSI C63.4-2003, FCC CFR 47 Part 2 and FCC CFR 47 Part 15.

3. FACILITIES AND ACCREDITATION

The test sites and measurement facilities used to collect data are located at 561F Monterey Road, Morgan Hill, California, USA. The sites are constructed in conformance with the requirements of ANSI C63.4, ANSI C63.7 and CISPR Publication 22. All receiving equipment conforms to CISPR Publication 16-1, "Radio Interference Measuring Apparatus and Measurement Methods."

CCS is accredited by NVLAP, Laboratory Code 200065-0. The full scope of accreditation can be viewed at <http://www.ccsemc.com>.

4. CALIBRATION AND UNCERTAINTY

4.1. MEASURING INSTRUMENT CALIBRATION

The measuring equipment utilized to perform the tests documented in this report has been calibrated in accordance with the manufacturer's recommendations, and is traceable to recognized national standards.

4.2. MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the apparatus:

PARAMETER	UNCERTAINTY
Radiated Emission, 30 to 200 MHz	+/- 3.3 dB
Radiated Emission, 200 to 1000 MHz	+4.5 / -2.9 dB
Radiated Emission, 1000 to 2000 MHz	+4.5 / -2.9 dB
Power Line Conducted Emission	+/- 2.9 dB

Uncertainty figures are valid to a confidence level of 95%.

5. EQUIPMENT UNDER TEST

5.1. DESCRIPTION OF EUT

The EUT is an 802.11b/g transceiver operating in the 2400-2484 MHz band. The radio utilizes two integral antennas for diversity, each with a maximum gain of 3.24dBi.

The radio module is manufactured by Broadcom Corp.

5.2. MAXIMUM OUTPUT POWER

The transmitter has a maximum peak conducted output power as follows:

2400 to 2483.5 MHz Authorized Band

Frequency Range (MHz)	Mode	Output Power (dBm)	Output Power (mW)
2412 - 2472	802.11b	21.42	138.68
2412 - 2472	802.11g	26.17	414.00

5.3. DESCRIPTION OF AVAILABLE ANTENNAS

The radio utilizes a PIFA antenna for diversity, each with a maximum gain of 3.24 dBi.

5.4. SOFTWARE AND FIRMWARE

The EUT driver software installed in the host support equipment during testing was BCM94311 , version. 3.100.53.0

The test utility software used during testing was wl_tools.

5.5. WORST-CASE CONFIGURATION AND MODE

The worst-case channel is determined as the channel with the highest output power. The highest measured output powers were at 2412 MHz for 11b mode and 2437 MHz for 11g mode.

The worst-case data rate for these channels are determined to be 1 Mb/s for 11b mode and 6 Mb/s for 11g mode, based on previous experience with WLAN product design architectures.

Thus all emissions tests were made in the 802.11b mode, 2412 MHz, 1 Mb/s, and 802.11g mode, 2437 MHz, 6 Mb/s.

WORSRT-CASE POWER AND BIT RATE SETTING

802.11b

CHANNEL	1	6	10	11	13
(MHz)	2412	2437	2457	2462	2472
Band Edge (dBm)	19	x	19	18.5	12
Emission (dBm)	19	19	x	x	19
Peak Power / PSD (dBm)	19	19	19	18.5	12
Bit Rate (Mbps)	11Mbps for Peak reading & 1Mbps for Average reading				

NOTE: For the rest of the RF Conducted and Radiated Emission tests, channel 13 is set to 19dBm for worst case power to cover all high channels_Channel 10 (19dBm), Channel 11 (18.5dBm) & Channel 13 (12dBm())

802.11g

CHANNEL	1	2	6	10	11	13
(MHz)	2412	2417	2437	2457	2462	2472
Band Edge (dBm)	18	19	x	19	17	12
Emission (dBm)	19	x	19	x	x	19
Peak Power / PSD (dBm)	18	19	19	19	17	12
Bit Rate (Mbps)	54Mbps for Peak reading & 6Mbps for Average reading					

NOTE: For the rest of the RF Conducted and Radiated Emission tests, channel 13 is set to 19dBm for worst case power to cover all high channels_Channel 10 (19dBm), Channel 11 (17dBm) & Channel 13 (12dBm())

5.6. DESCRIPTION OF TEST SETUP

SUPPORT EQUIPMENT

PERIPHERAL SUPPORT EQUIPMENT LIST				
Description	Manufacturer	Model	Serial Number	FCC ID
Extended Card	ADEXELEC	PEX1-MINI	01/01/1900	N/A
AC Adapter	HP	3751260-001	PPP017L	N/A
laptop	HP	ZV6000	CND51501BMD	N/A


I/O CABLES

I/O CABLE LIST						
Cable No.	Port	# of Identical Ports	Connector Type	Cable Type	Cable Length	Remarks
1	AC	1	US115	Unshielded	2m	N/A
2	DC	1	DC	Unshielded	2m	N/A

TEST SETUP

The EUT is installed in a host laptop computer via an extension board during the tests. Test software exercised the radio card.

SETUP DIAGRAM

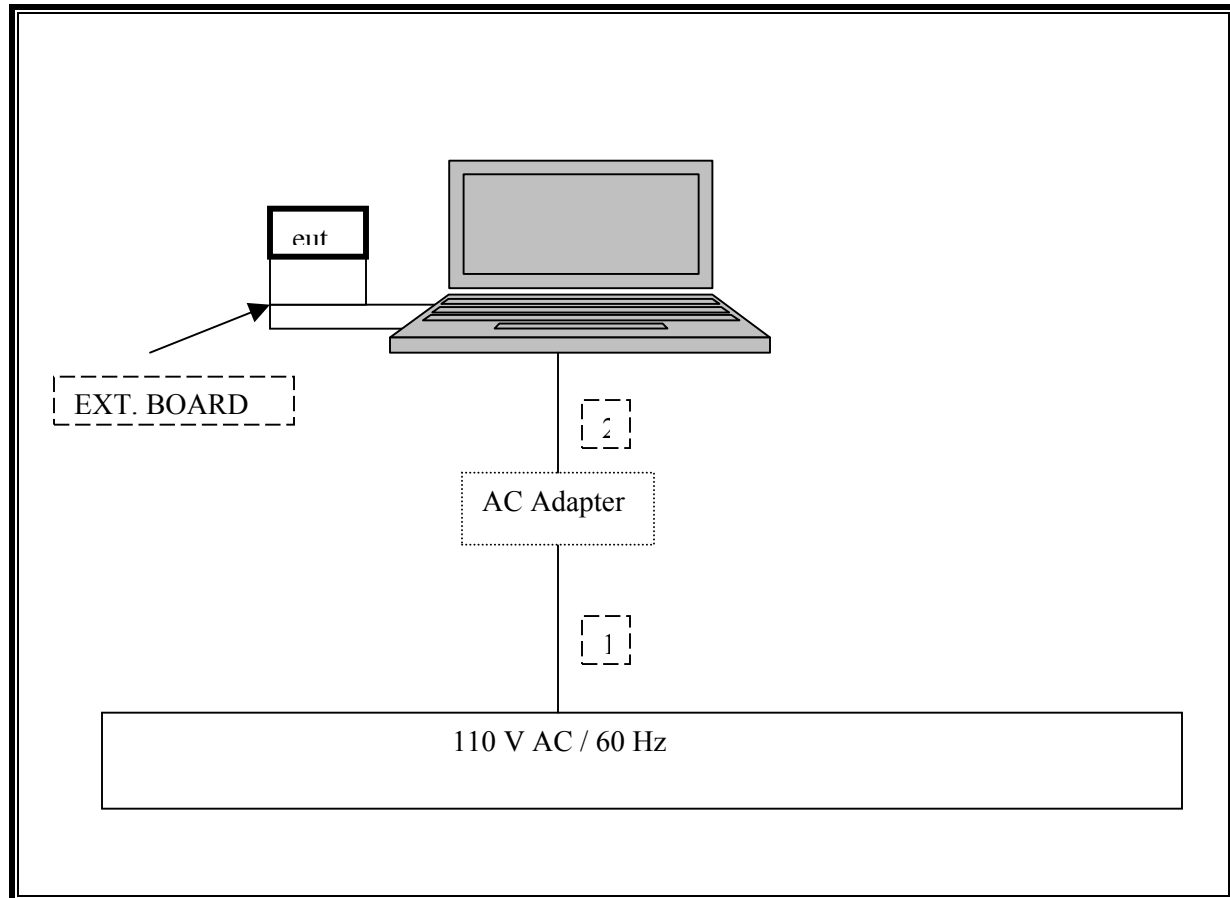

6. TEST AND MEASUREMENT EQUIPMENT

The following test and measurement equipment was utilized for the tests documented in this report:

TEST EQUIPMENT LIST				
Description	Manufacturer	Model	Serial Number	Cal Due
EMI Test Receiver	R & S	ESHS 20	827129/006	10/22/2005
Site A Line Stabilizer / Conditioner	Tripplite	LC-1800a	A0051681	CNR
LISN, 10 kHz ~ 30 MHz	FCC	LISN-50/250-25-2	2023	08/30/2005
LISN, 10 kHz ~ 30 MHz	Solar	8012-50-R-24-BNC	8379443	10/21/2005
30MHz---- 2Ghz	Sunol Sciences	JB1 Antenna	A121003	09/15/2005
Spectrum Analyzer, 26.5 GHz	HP	8593EM	3710A00205	01/06/2006
Preamplifier, 30-1300 MHz	HP	8447D	2944A06550	08/26/2005
Antenna, Horn 1 ~ 18 GHz	EMCO	3117	29310	09/12/2005
Antenna, Horn 18 ~ 26 GHz	ARA	SWH-28	1007	09/12/2005
Line Filter	Lindgren	LMF-3489	497	N.C.R.
Preamplifier, 1 ~ 26.5 GHz	HP	8449B	3008A00369	08/17/2005
Peak Power Meter	Agilent	E4416A	GB41291160	02/09/2006
Peak / Average Power Sensor	Agilent	E9327A	US40440755	02/10/2006
4.0 High Pass Filter	Micro Tronics	HPM13351	3	N/A
Spectrum Analyzer 20 Hz ~ 44 GHz	Agilent	E4446A	MY43360112	06/16/2005
2.4 - 2.5 Band Reject Filter	Micro Tronics	N/A	1	N/A

7. LIMITS AND RESULTS

7.1.1. 6 dB BANDWIDTH

LIMIT

§15.247 (a) (2) For direct sequence systems, the minimum 6 dB bandwidth shall be at least 500 kHz.

TEST PROCEDURE

The transmitter output is connected to a spectrum analyzer. The RBW is set to 100 kHz and the VBW is set to 300 kHz. The sweep time is coupled.

RESULTS

No non-compliance noted:


802.11b Mode


Channel	Frequency (MHz)	6 dB Bandwidth (kHz)	Minimum Limit (kHz)	Margin (kHz)
Low	2412	10670	500	10170
Middle	2437	11670	500	11170
High	2472	10830	500	10330


802.11g Mode

Channel	Frequency (MHz)	6 dB Bandwidth (kHz)	Minimum Limit (kHz)	Margin (kHz)
Low	2412	16580	500	16080
Middle	2437	16330	500	15830
High	2472	16500	500	16000


6 DB BANDWIDTH (802.11b MODE)

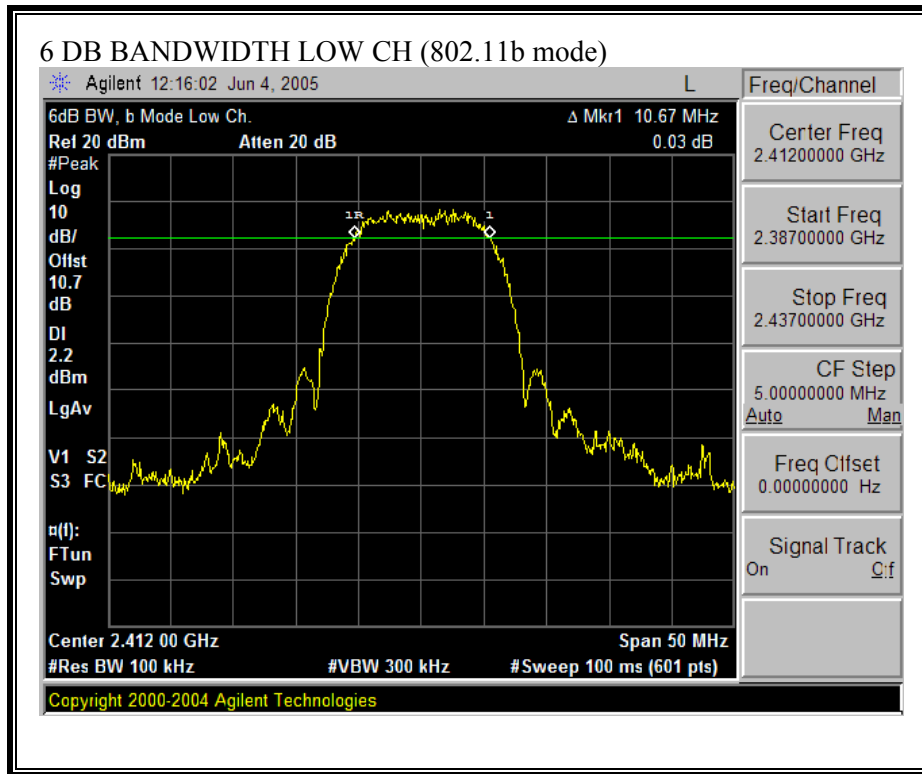


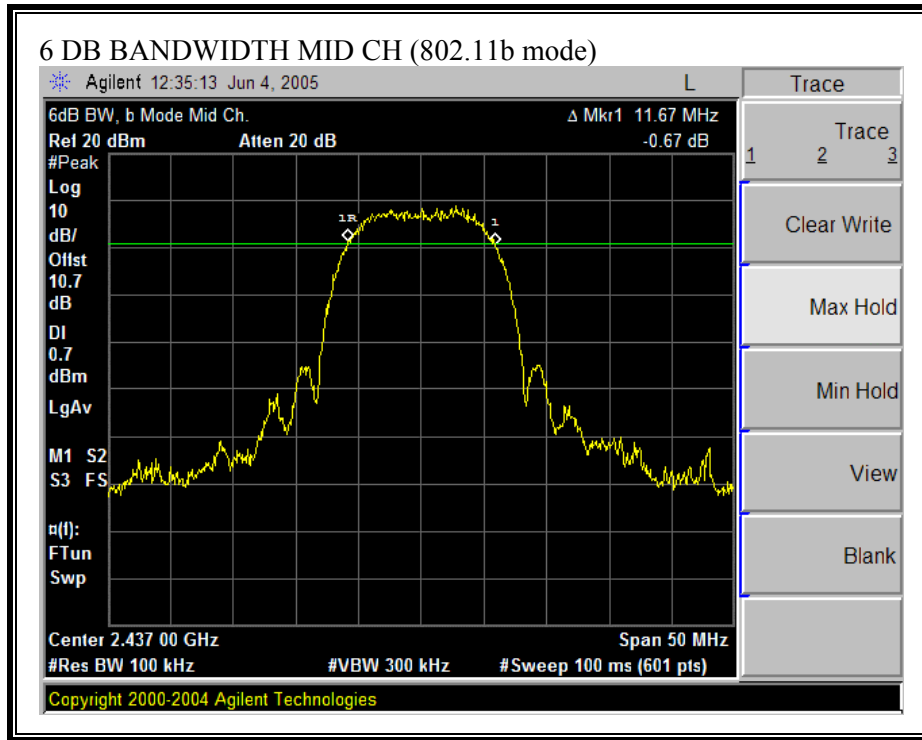


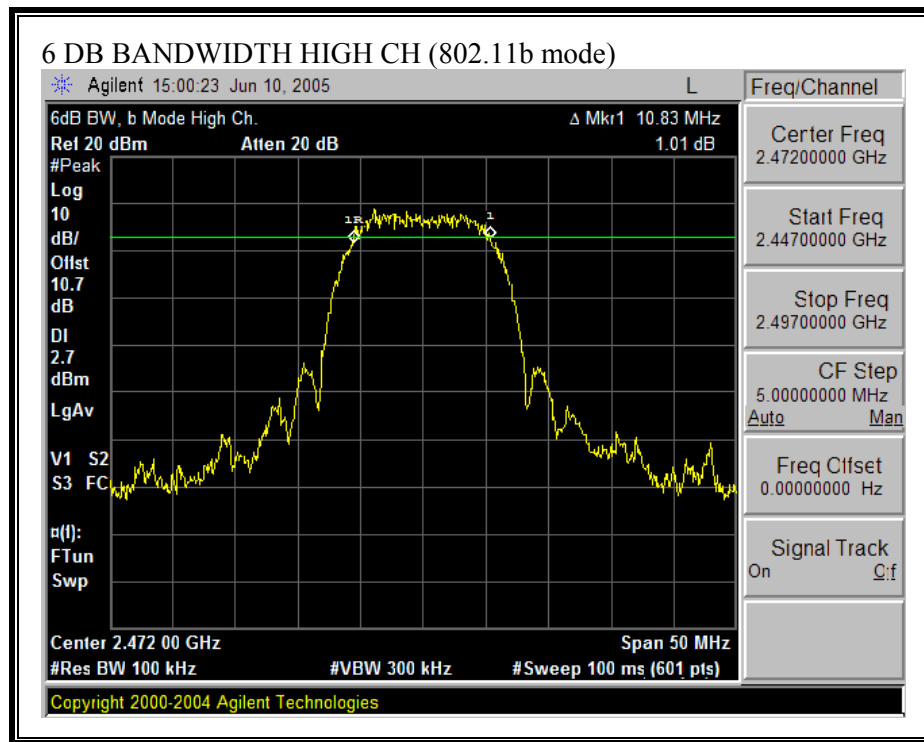

6 DB BANDWIDTH (802.11g MODE)

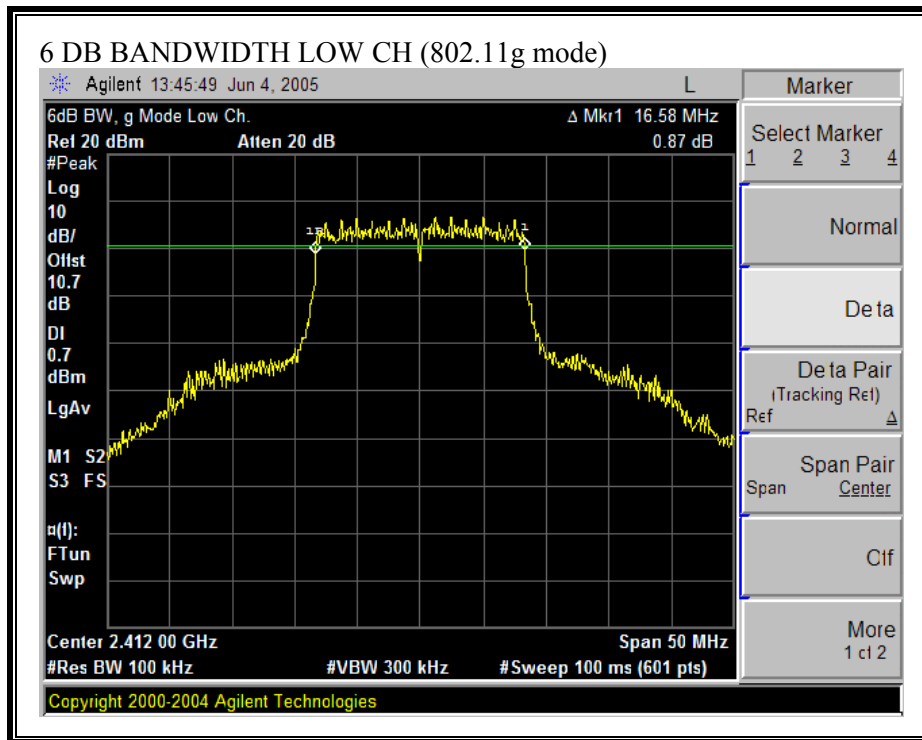

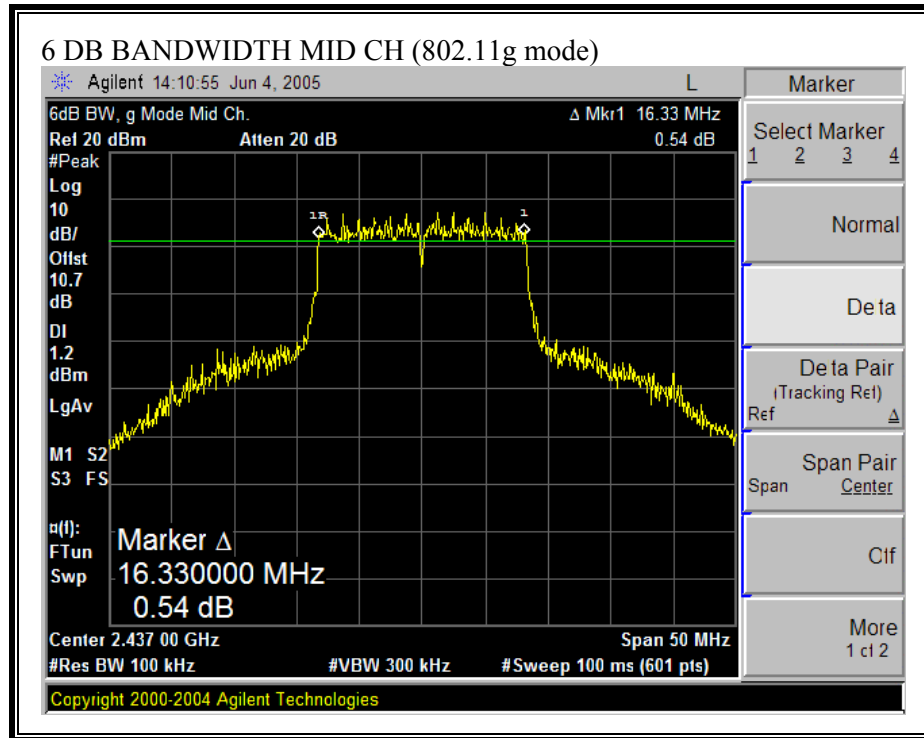

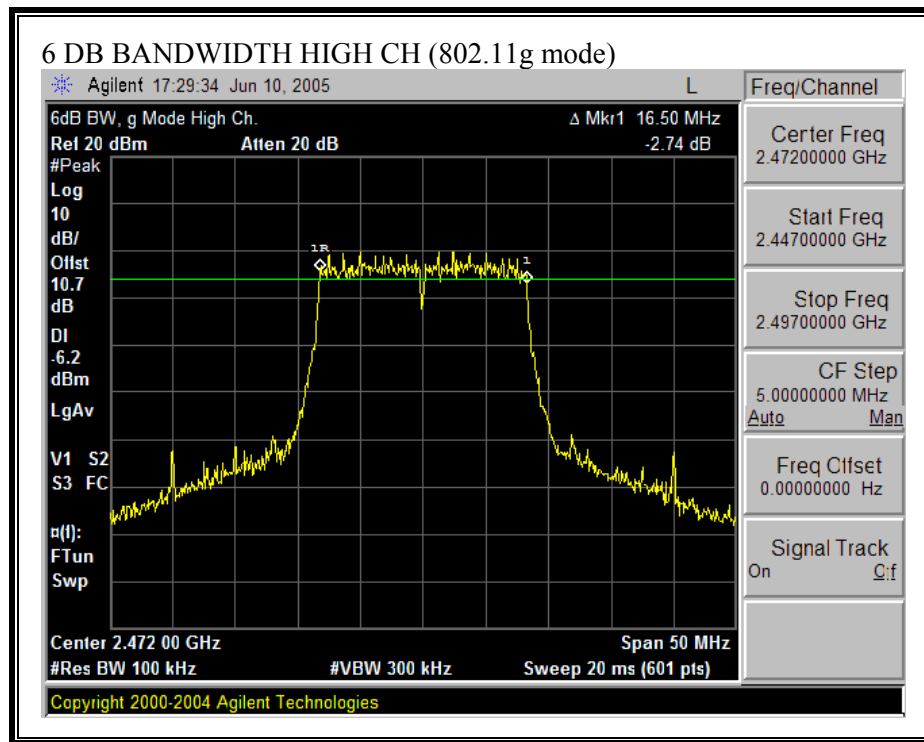

7.1.2. 99% BANDWIDTH

LIMIT

None; for reporting purposes only.

TEST PROCEDURE

The transmitter output is connected to the spectrum analyzer. The RBW is set to 1% to 3% of the 99 % bandwidth. The VBW is set to 3 times the RBW. The sweep time is coupled. The spectrum analyzer internal 99% bandwidth function is utilized.

RESULTS

No non-compliance noted:


802.11b Mode


Channel	Frequency (MHz)	99% Bandwidth (MHz)
Low	2412	12.7693
Middle	2437	12.7976
High	2472	12.7996


802.11g Mode

Channel	Frequency (MHz)	99% Bandwidth (MHz)
Low	2412	16.5125
Middle	2437	16.5458
High	2472	16.4275


99% BANDWIDTH (802.11b MODE)

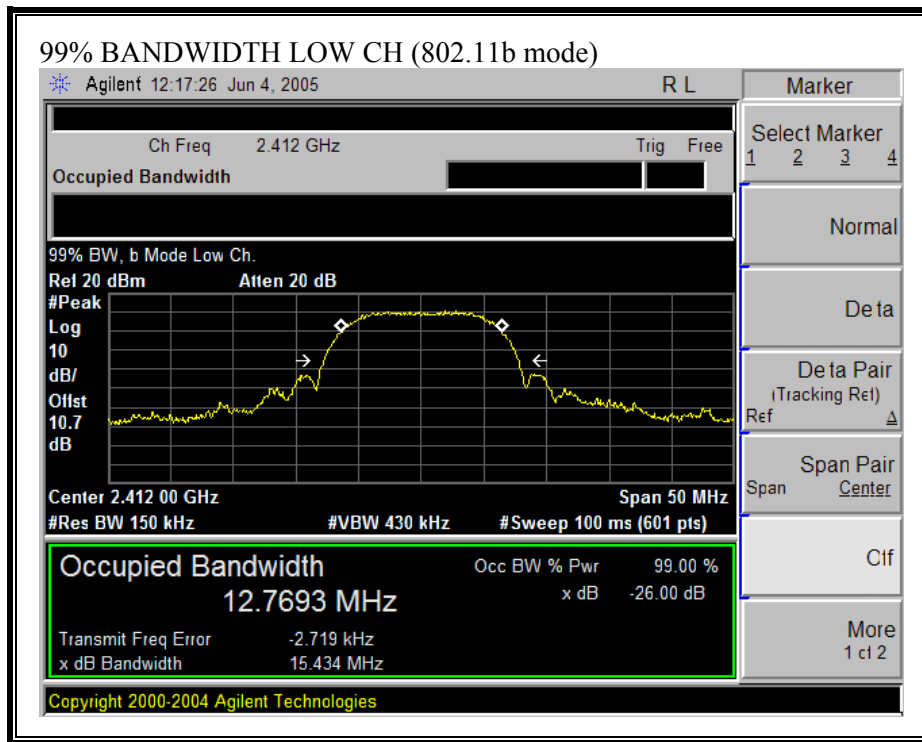


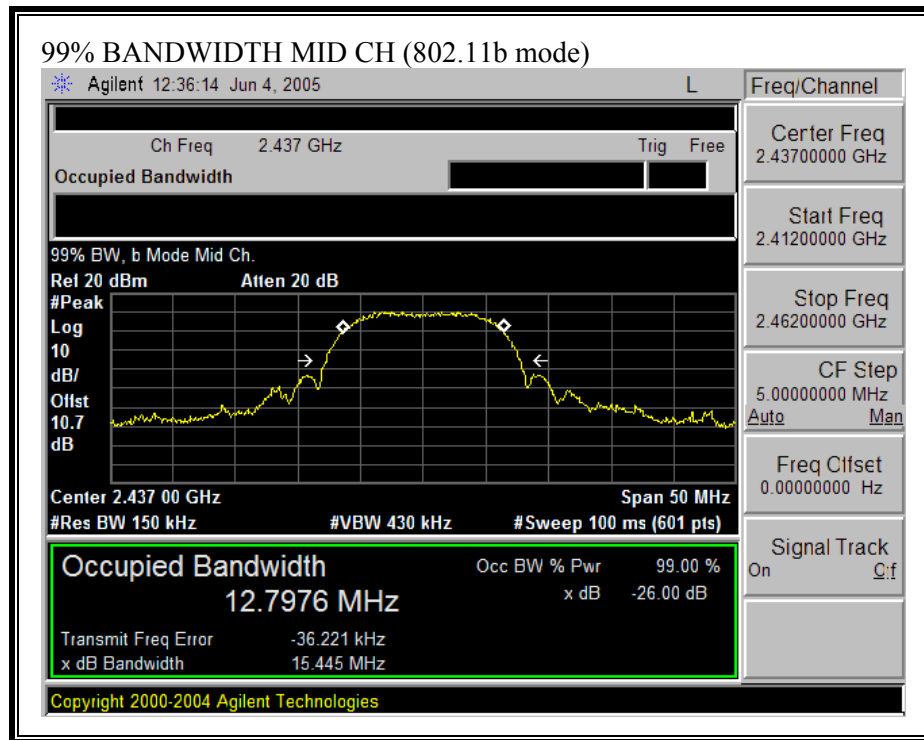


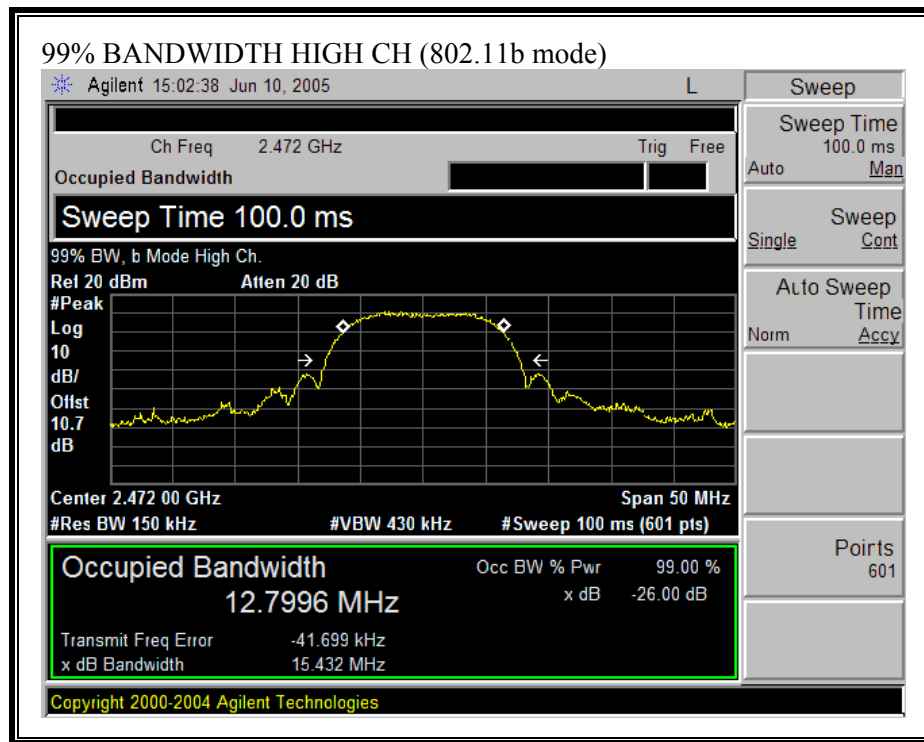

99% BANDWIDTH (802.11g MODE)

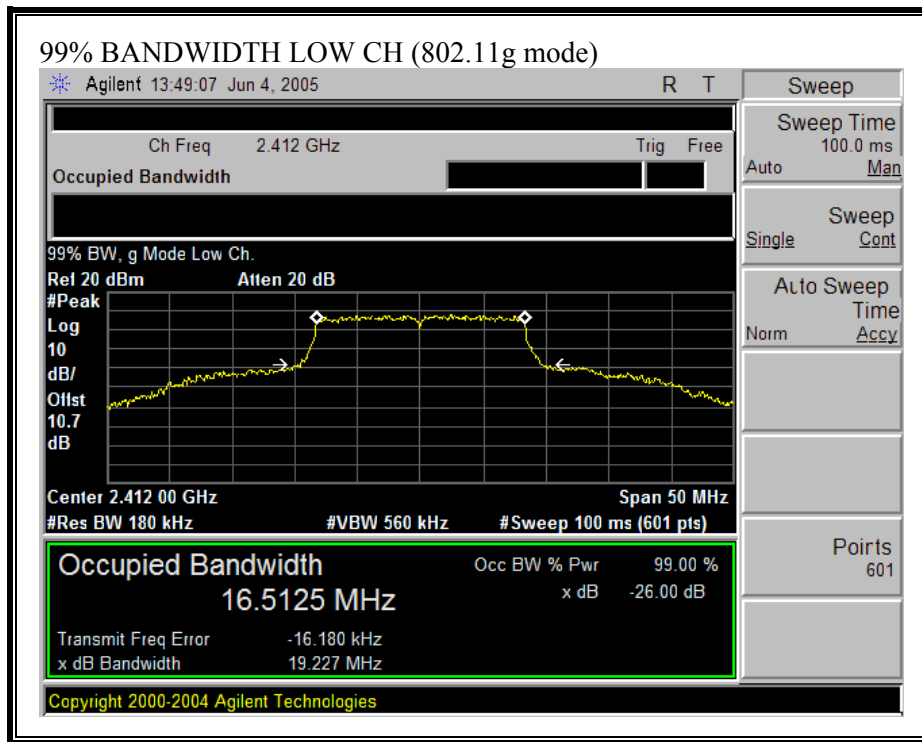

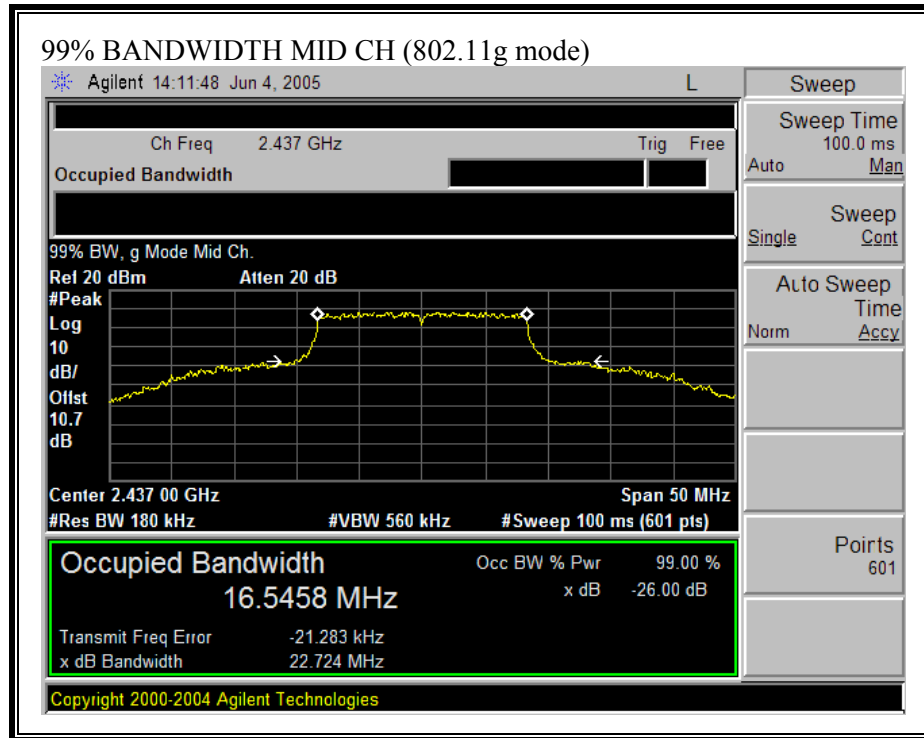

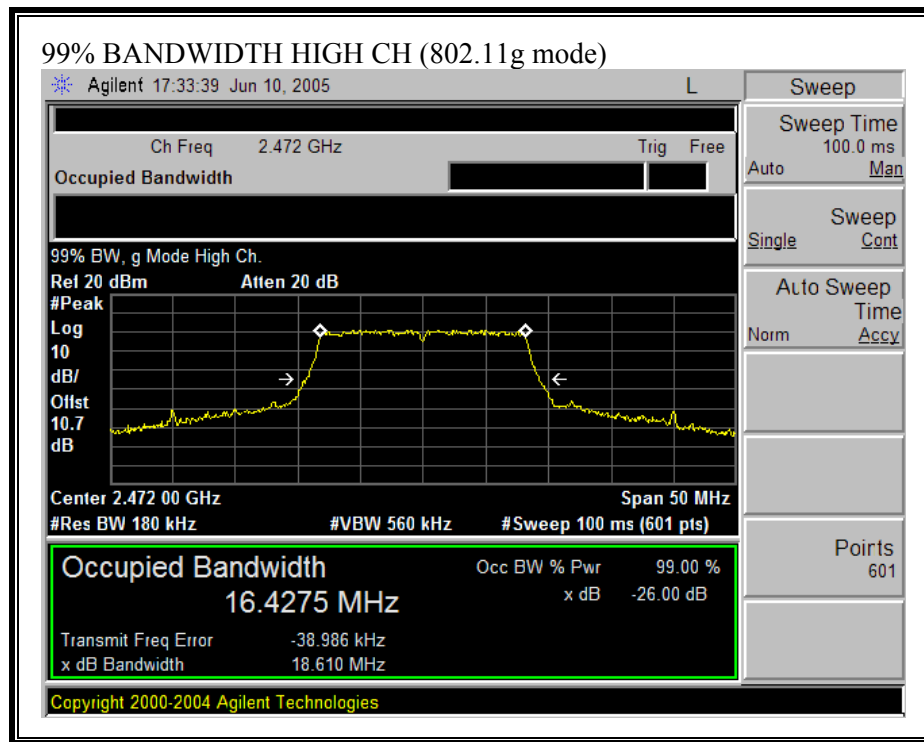

7.1.3. PEAK OUTPUT POWER

PEAK POWER LIMIT

§15.247 (b) The maximum peak output power of the intentional radiator shall not exceed the following:

§15.247 (b) (3) For systems using digital modulation in the 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz bands: 1 watt.

§15.247 (b) (4) Except as shown in paragraphs (b)(4) (i), (ii) and (iii) of this section, if transmitting antennas of directional gain greater than 6 dBi are used the peak output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1) or (b)(2) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

§15.247 (b) (4) (i) Systems operating in the 2400–2483.5 MHz band that are used exclusively for fixed, point-to-point operations may employ transmitting antennas with directional gain greater than 6 dBi provided the maximum peak output power of the intentional radiator is reduced by 1 dB for every 3 dB that the directional gain of the antenna exceeds 6 dBi.

TEST PROCEDURE

The transmitter output is connected to a spectrum analyzer and the analyzer's internal channel power integration function is used to integrate the power over a bandwidth greater than or equal to the 99% bandwidth.

RESULTS

No non-compliance noted:

802.11b Mode


Channel	Frequency (MHz)	Peak Power (dBm)	Limit (dBm)	Margin (dB)
1	2412	21.42	30	-8.58
6	2437	21.20	30	-8.80
10	2457	21.25	30	-8.75
11	2462	21.14	30	-8.86
13	2472	14.75	30	-15.25

802.11g Mode


Channel	Frequency (MHz)	Peak Power (dBm)	Limit (dBm)	Margin (dB)
1	2412	25.20	30	-4.80
2	2417	26.08	30	-3.92
6	2437	26.17	30	-3.83
10	2457	25.89	30	-4.11
11	2462	24.40	30	-5.60
13	2472	19.55	30	-10.45

OUTPUT POWER (802.11b MODE) – Channel 1, 6, 10, 11 & 13


CHANNEL 1, 2412 MHz_ POWER = 19 dBm (Gate Average Power).

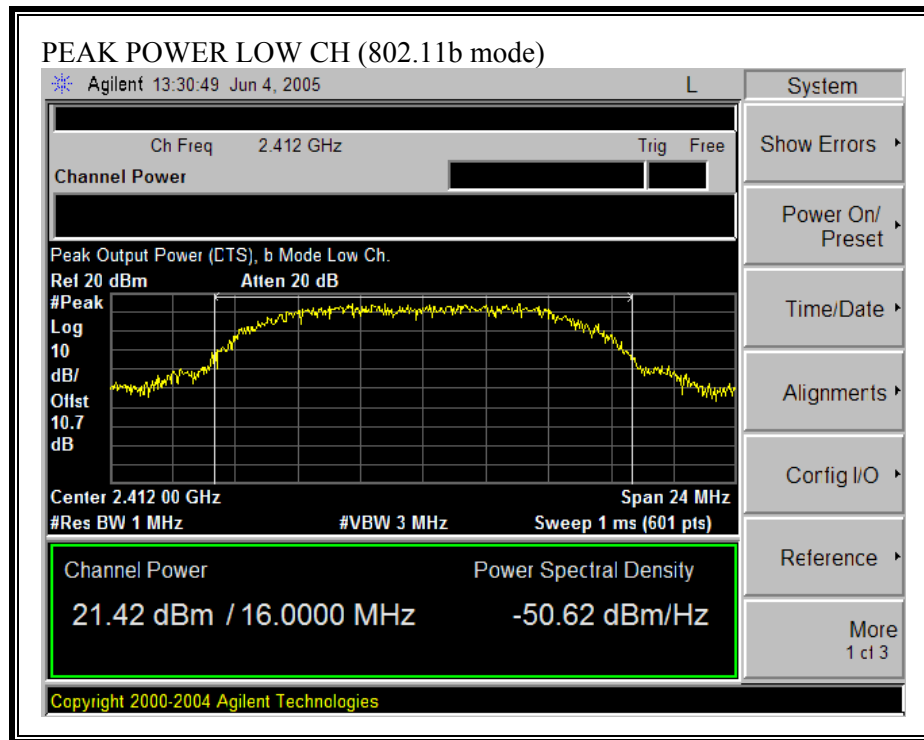


CHANNEL 6, 2437 MHz_POWER = 19 dBm (Gate Average Power).

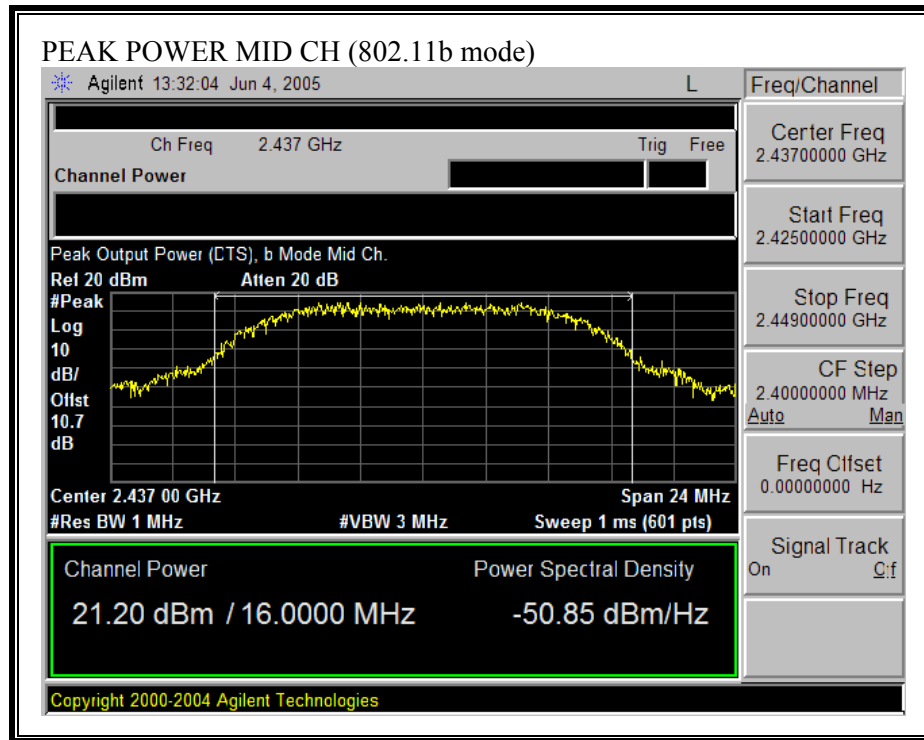


CHANNEL 10, 2457 MHz_POWER = 19 dBm (Gate Average Power).

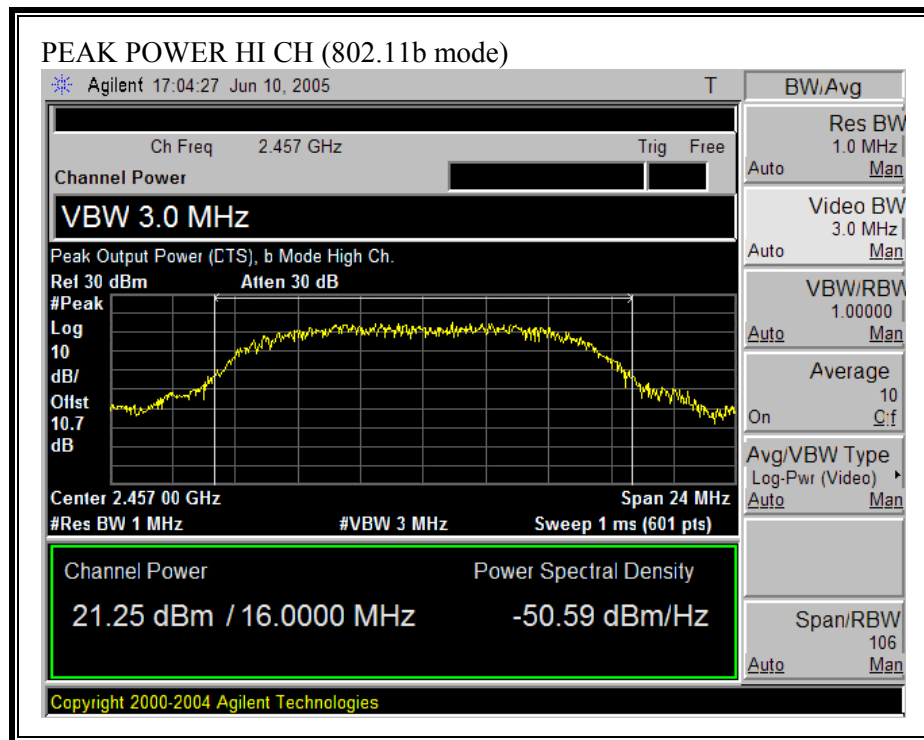

CHANNEL 11, 2462 MHz_POWER = 18.5 dBm (Gate Average Power).

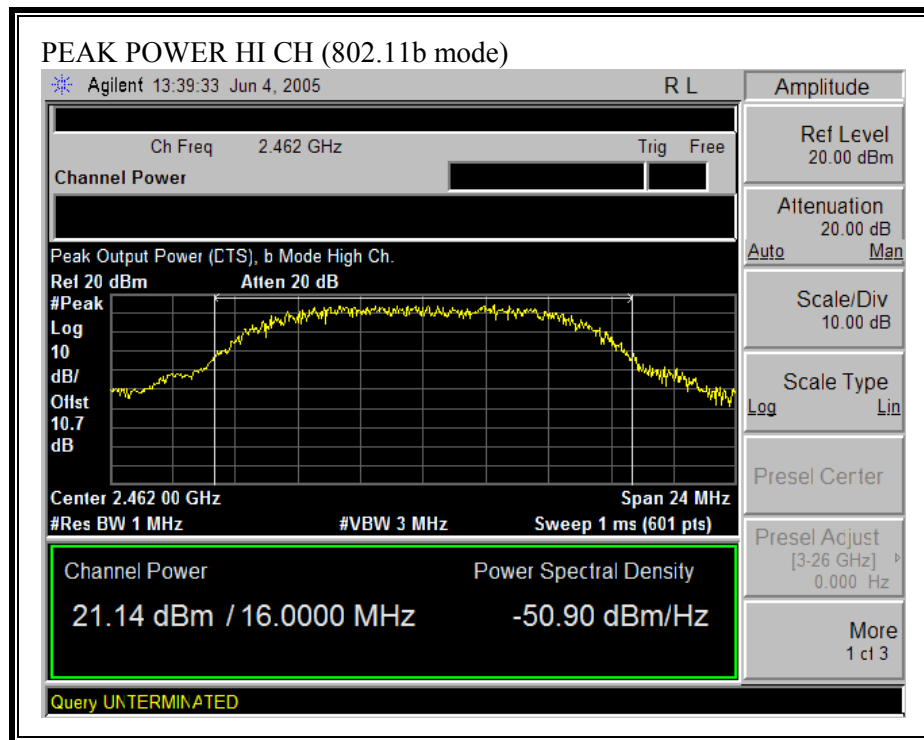


CHANNEL 13, 2472 MHz_POWER = 12 dBm (Gate Average Power).

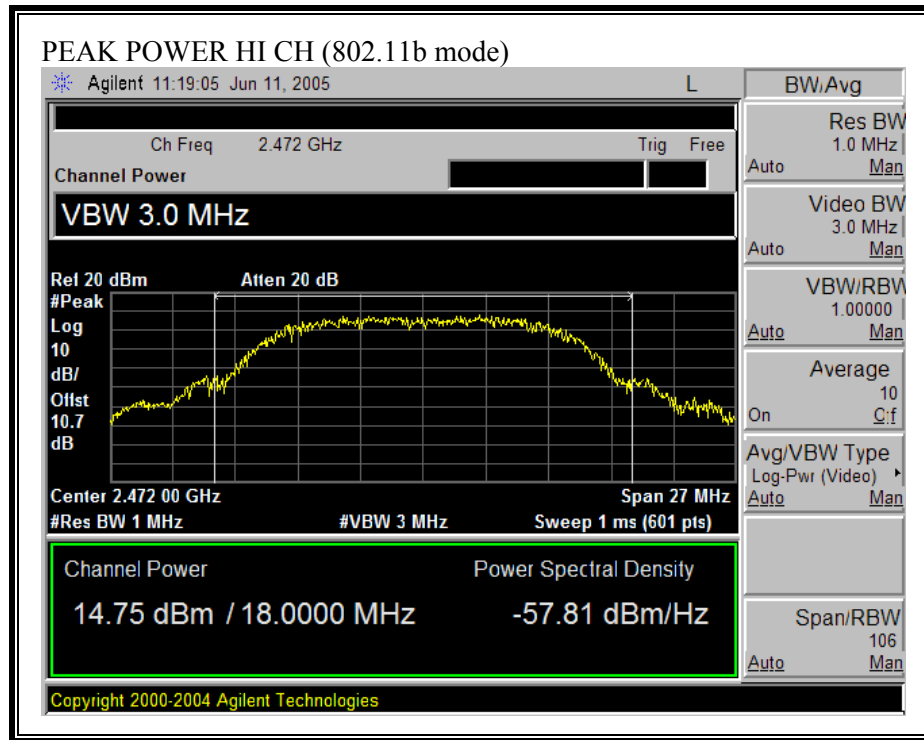


OUTPUT POWER (802.11g MODE) – Channel 1, 2, 6, 10, 11 & 13

CHANNEL 1, 2412 MHz _ POWER = 18 dBm (Gate Average Power).

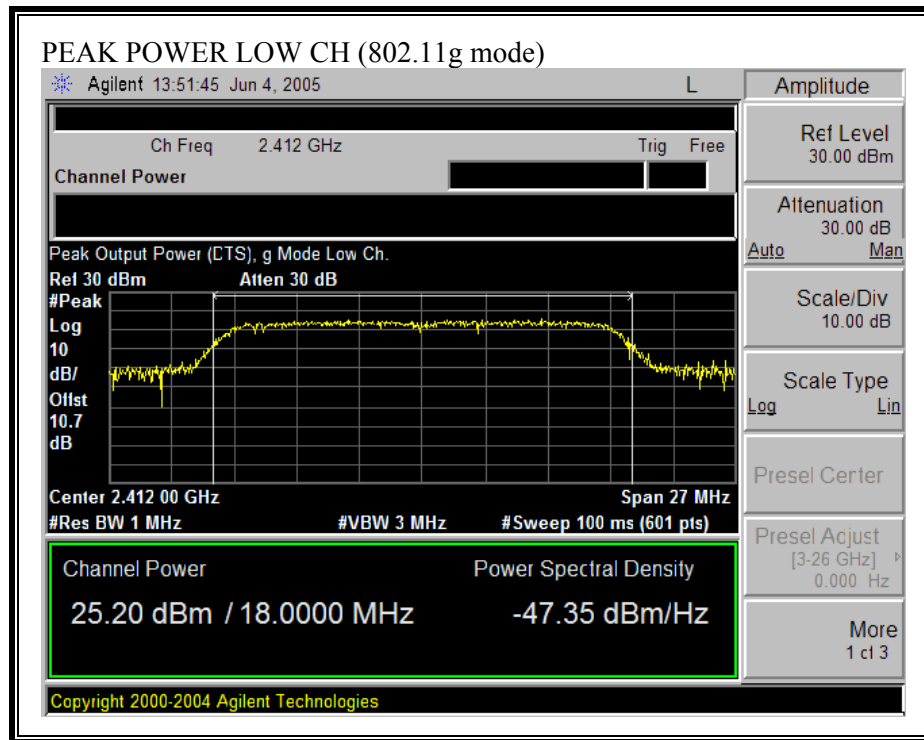

CHANNEL 2, 2417 MHz – POWER = 19 dBm (Gate Average Power).

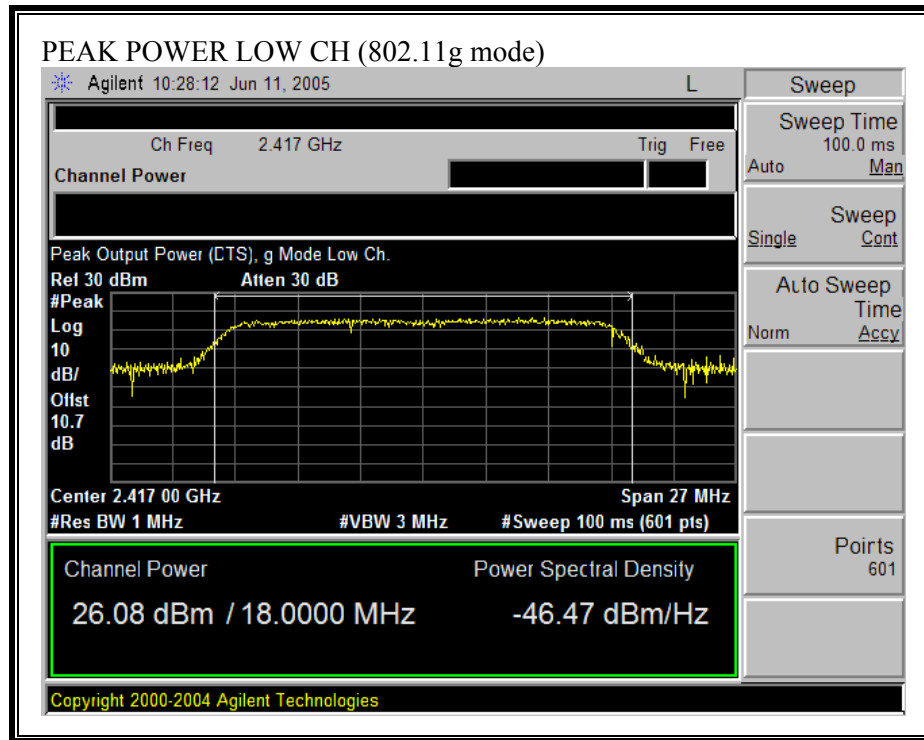

PEAK POWER MID CH (802.11g mode)

Agilent 09:31:50 Jun 13, 2005 L

Ch Freq 2.437 GHz Trig Free

Channel Power

Peak Output Power (DTS), g Mode Mid Ch.
Ref 30 dBm Atten 30 dB

#Peak Log 10 dB/ Offst 10.7 dB

Center 2.437 00 GHz Span 27 MHz
#Res BW 1 MHz #VBW 3 MHz #Sweep 100 ms (601 pts)

Channel Power Power Spectral Density

26.17 dBm / 18.0000 MHz -46.38 dBm/Hz

Sweep

Sweep Time 100.0 ms
Auto Man


Sweep Single Cont

Auto Sweep Time Norm Accy


Points 601

Copyright 2000-2004 Agilent Technologies


CHANNEL 10, 2457 MHz _ POWER = 19 dBm (Gate Average Power).

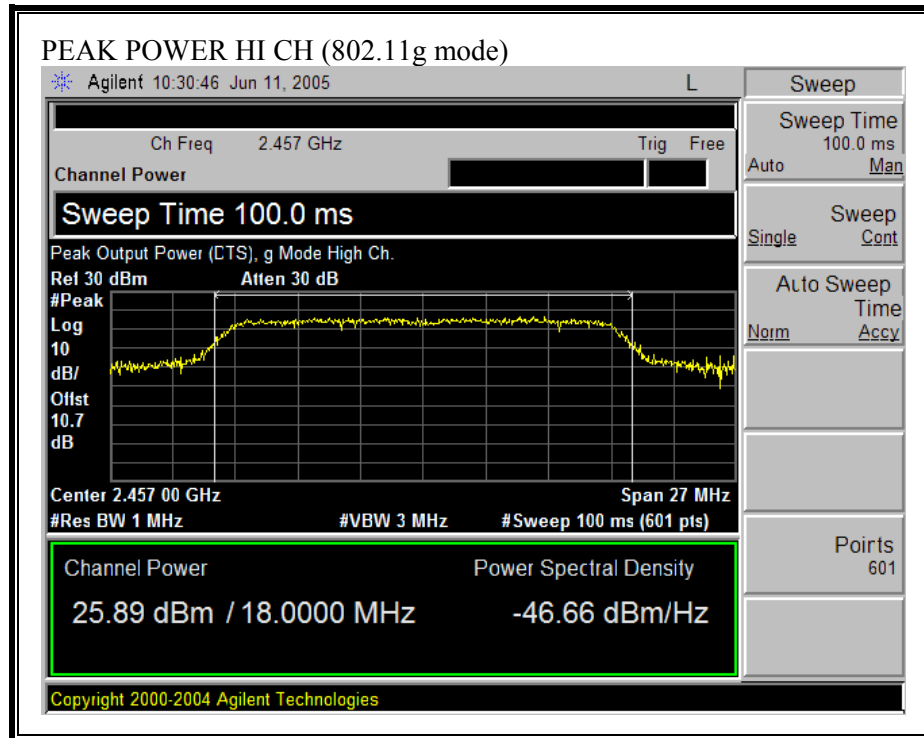

CHANNEL 11, 2462 MHz _ POWER = 17 dBm (Gate Average Power).

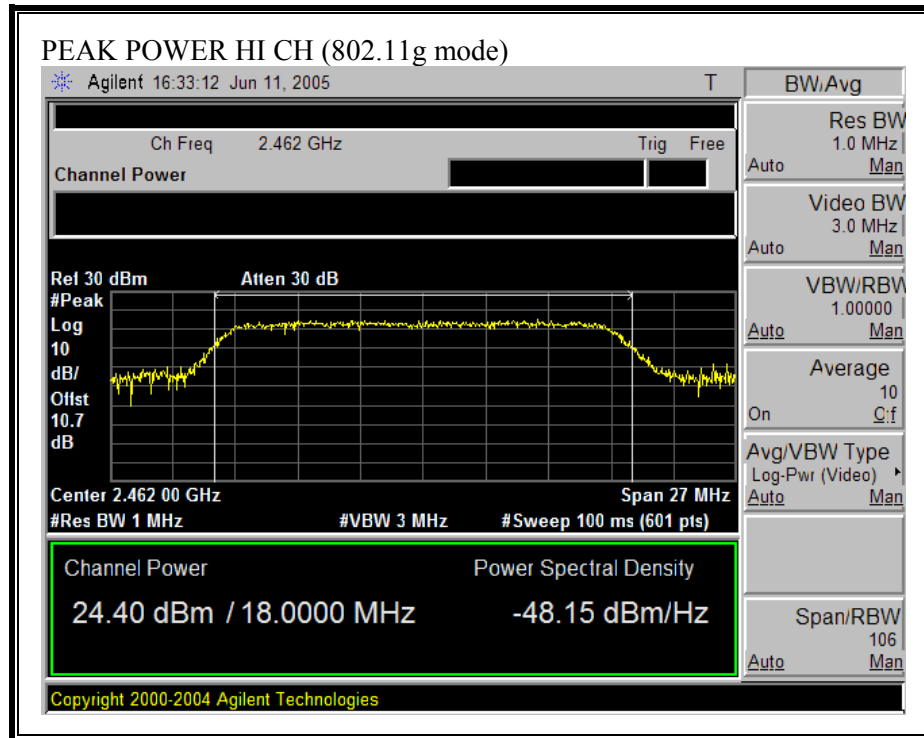

CHANNEL 13, 2472 MHz _ POWER = 12dBm (Gate Average Power).

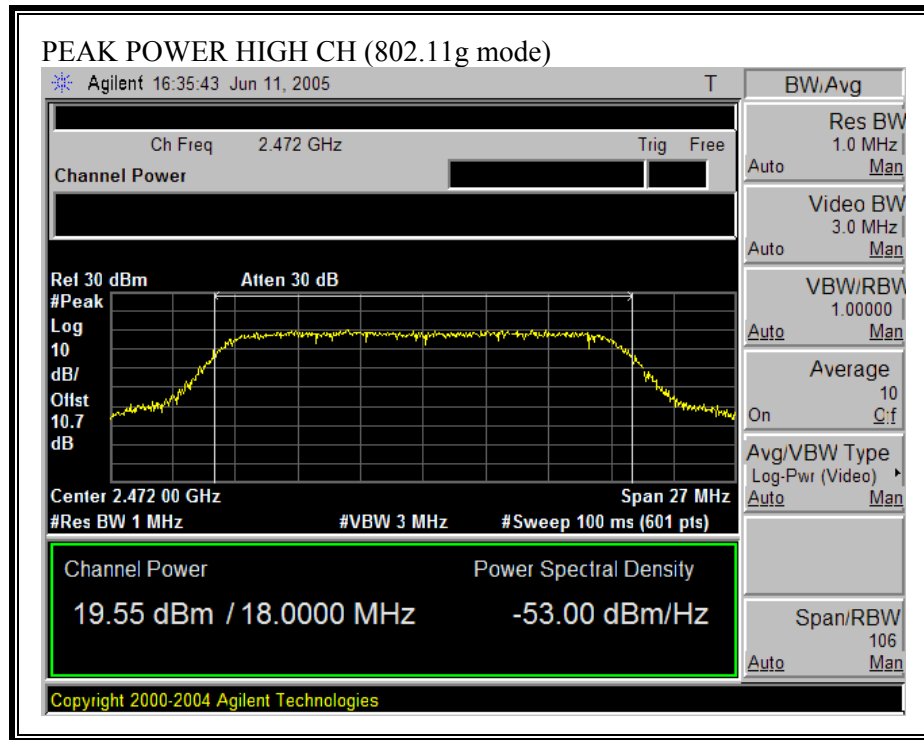

7.1.4. MAXIMUM PERMISSIBLE EXPOSURE

LIMITS

§1.1310 The criteria listed in Table 1 shall be used to evaluate the environmental impact of human exposure to radio-frequency (RF) radiation as specified in §1.1307(b), except in the case of portable devices which shall be evaluated according to the provisions of §2.1093 of this chapter.

TABLE 1—LIMITS FOR MAXIMUM PERMISSIBLE EXPOSURE (MPE)

Frequency range (MHz)	Electric field strength (V/m)	Magnetic field strength (A/m)	Power density (mW/cm ²)	Averaging time (minutes)
(A) Limits for Occupational/Controlled Exposures				
0.3–3.0	614	1.63	*(100)	6
3.0–30	1842/f	4.89/f	*(900/f ²)	6
30–300	61.4	0.163	1.0	6
300–1500			f/300	6
1500–100,000			5	6
(B) Limits for General Population/Uncontrolled Exposure				
0.3–1.34	614	1.63	*(100)	30
1.34–30	824/f	2.19/f	*(180/f ²)	30

TABLE 1—LIMITS FOR MAXIMUM PERMISSIBLE EXPOSURE (MPE)—Continued

Frequency range (MHz)	Electric field strength (V/m)	Magnetic field strength (A/m)	Power density (mW/cm ²)	Averaging time (minutes)
30–300	27.5	0.073	0.2	30
300–1500			f/1500	30
1500–100,000			1.0	30

f = frequency in MHz

* = Plane-wave equivalent power density

NOTE 1 TO TABLE 1: Occupational/controlled limits apply in situations in which persons are exposed as a consequence of their employment provided those persons are fully aware of the potential for exposure and can exercise control over their exposure. Limits for occupational/controlled exposure also apply in situations when an individual is transient through a location where occupational/controlled limits apply provided he or she is made aware of the potential for exposure.

NOTE 2 TO TABLE 1: General population/uncontrolled exposures apply in situations in which the general public may be exposed, or in which persons that are exposed as a consequence of their employment may not be fully aware of the potential for exposure or can not exercise control over their exposure.

CALCULATIONS

Given

$$E = \sqrt{(30 * P * G) / d}$$

and

$$S = E^2 / 3770$$

where

E = Field Strength in Volts/meter

P = Power in Watts

G = Numeric antenna gain

d = Distance in meters

S = Power Density in milliwatts/square centimeter

Combining equations and rearranging the terms to express the distance as a function of the remaining variables yields:

$$d = \sqrt{((30 * P * G) / (3770 * S))}$$

Changing to units of Power to mW and Distance to cm, using:

$$P \text{ (mW)} = P \text{ (W)} / 1000 \text{ and}$$

$$d \text{ (cm)} = 100 * d \text{ (m)}$$

yields

$$d = 100 * \sqrt{((30 * (P / 1000) * G) / (3770 * S))}$$

$$d = 0.282 * \sqrt{(P * G / S)}$$

where

d = distance in cm

P = Power in mW

G = Numeric antenna gain

S = Power Density in mW/cm²

Substituting the logarithmic form of power and gain using:

$$P \text{ (mW)} = 10^{(P \text{ (dBm)} / 10)} \text{ and}$$

$$G \text{ (numeric)} = 10^{(G \text{ (dBi)} / 10)}$$

yields

$$d = 0.282 * 10^{((P + G) / 20)} / \sqrt{S} \quad \text{Equation (1)}$$

where

d = MPE distance in cm

P = Power in dBm

G = Antenna Gain in dBi

S = Power Density Limit in mW/cm²

Equation (1) and the measured peak power is used to calculate the MPE distance.

LIMITS

From §1.1310 Table 1 (B), $S = 1.0 \text{ mW/cm}^2$

RESULTS

No non-compliance noted:

Mode	Power Density Limit (mW/cm²)	Output Power (dBm)	Antenna Gain (dBi)	MPE Distance (cm)
802.11b	1.0	21.42	3.24	4.82
802.11g	1.0	26.17	3.24	8.33

NOTE: For mobile or fixed location transmitters, the minimum separation distance is 20 cm, even if calculations indicate that the MPE distance would be less.

7.1.5. AVERAGE POWER

AVERAGE POWER LIMIT

None; for reporting purposes only.

TEST PROCEDURE

The transmitter output is connected to a power meter.

RESULTS

No non-compliance noted:

The cable assembly insertion loss of 10.7 dB (including 10 dB pad and 0.7 dB cable) was entered as an offset in the power meter to allow for direct reading of power.

802.11b Mode (Gate Average Power)

Channel	Frequency (MHz)	Power (dBm)
1	2412	19.20
2	2417	19.10
6	2437	19.12
10	2457	19.06
11	2462	18.90
13	2472	12.08

802.11g Mode (Gate Average Power)

Channel	Frequency (MHz)	Power (dBm)
1	2412	18.36
2	2417	19.07
6	2437	19.10
10	2457	19.28
11	2462	17.13
13	2472	12.20

7.1.6. PEAK POWER SPECTRAL DENSITY

LIMIT

§15.247 (d) For direct sequence systems, the peak power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.

TEST PROCEDURE

The transmitter output is connected to a spectrum analyzer, the maximum level in a 3 kHz bandwidth is measured with the spectrum analyzer using RBW = 3 kHz and VBW > 3 kHz, sweep time = span / 3 kHz, and video averaging is turned off. The PPSD is the highest level found across the emission in any 3 kHz band.

RESULTS

No non-compliance noted:


802.11b Mode

Channel	Frequency (MHz)	PPSD (dBm)	Limit (dBm)	Margin (dB)
Low	2412	-4.66	8	-12.66
Low	2437	-5.01	8	-13.01
Mid	2457	-4.59	8	-12.59
High	2462	-6.58	8	-14.58
High	2472	-4.60	8	-12.60


802.11g Mode

Channel	Frequency (MHz)	PPSD (dBm)	Limit (dBm)	Margin (dB)
Low	2412	-6.66	8	-14.66
Low	2417	-6.87	8	-14.87
Middle	2437	-8.16	8	-16.16
High	2455	-6.41	8	-14.41
High	2462	-7.86	8	-15.86
High	2472	-12.98	8	-20.98


PEAK POWER SPECTRAL DENSITY (802.11b MODE), 2412 MHz, Power = 19dBm

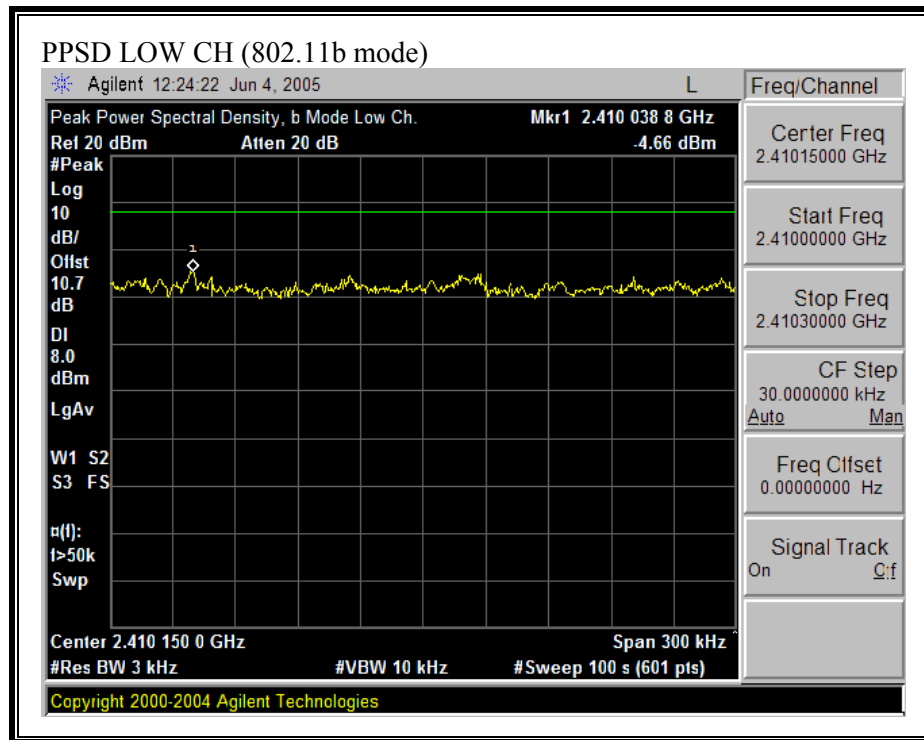


PEAK POWER SPECTRAL DENSITY (802.11b MODE), 2437 MHz, Power = 19dBm

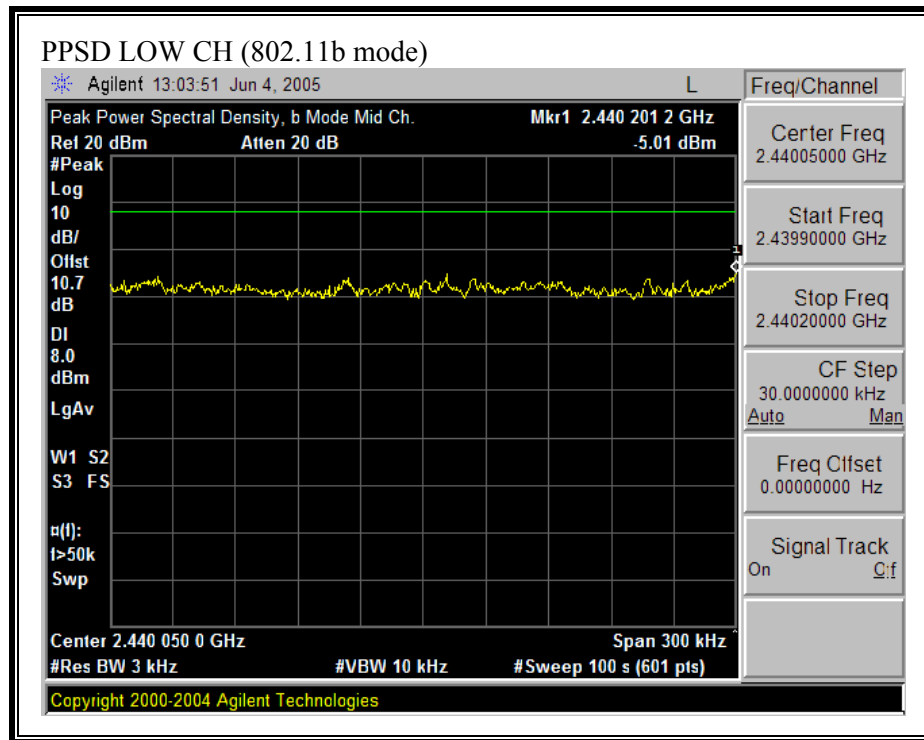


PEAK POWER SPECTRAL DENSITY (802.11b MODE), 2457 MHz, Power = 19dBm

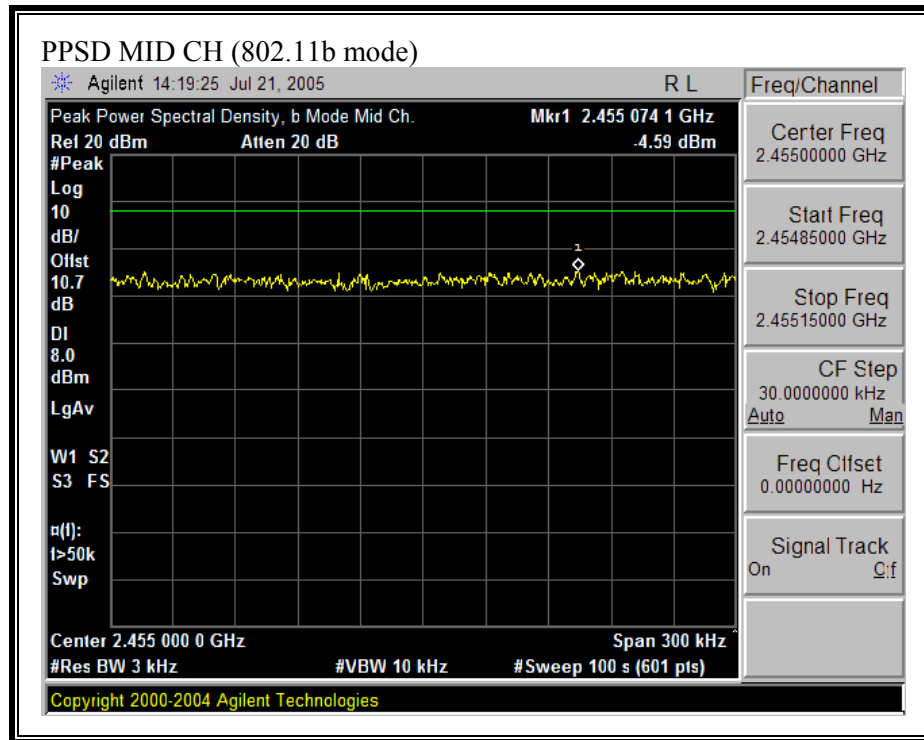


PEAK POWER SPECTRAL DENSITY (802.11b MODE), 2462 MHz, Power = 18.5dBm

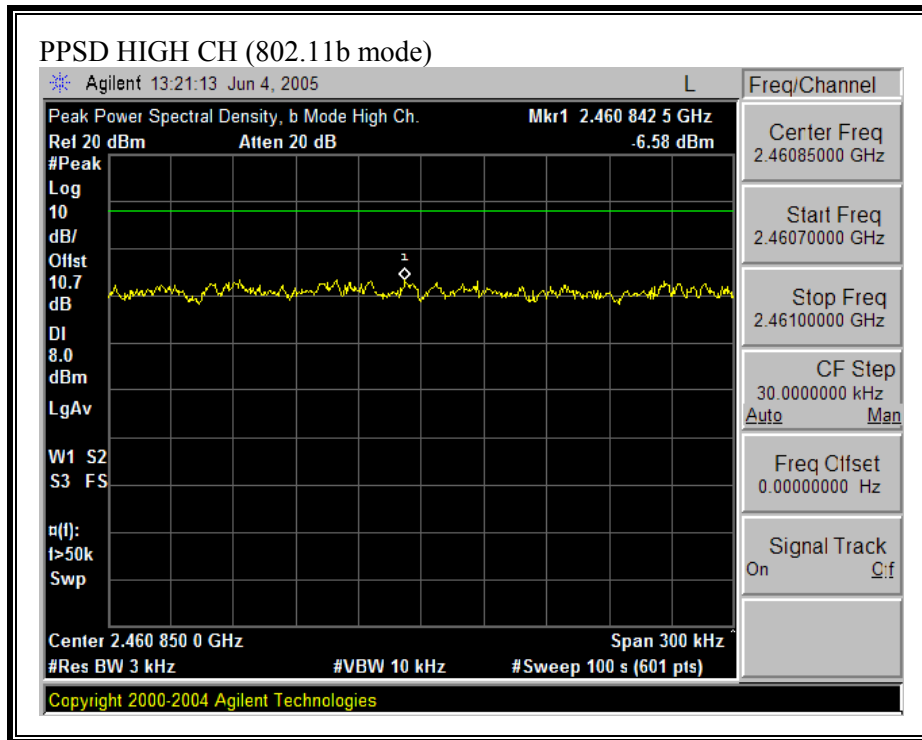


PEAK POWER SPECTRAL DENSITY (802.11b MODE), 2472 MHz, Power = 12dBm

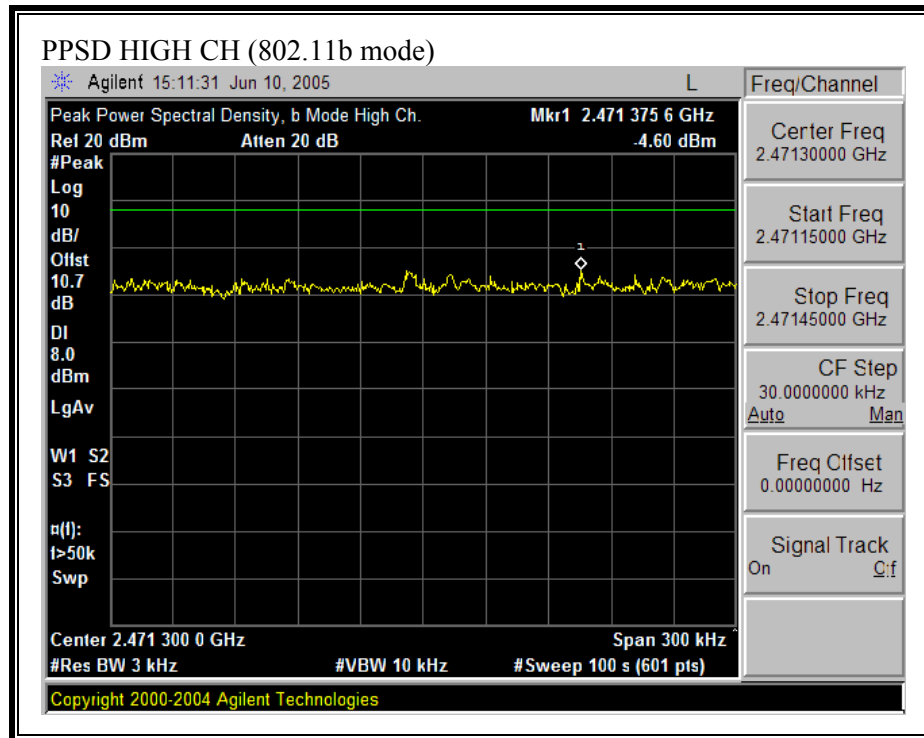


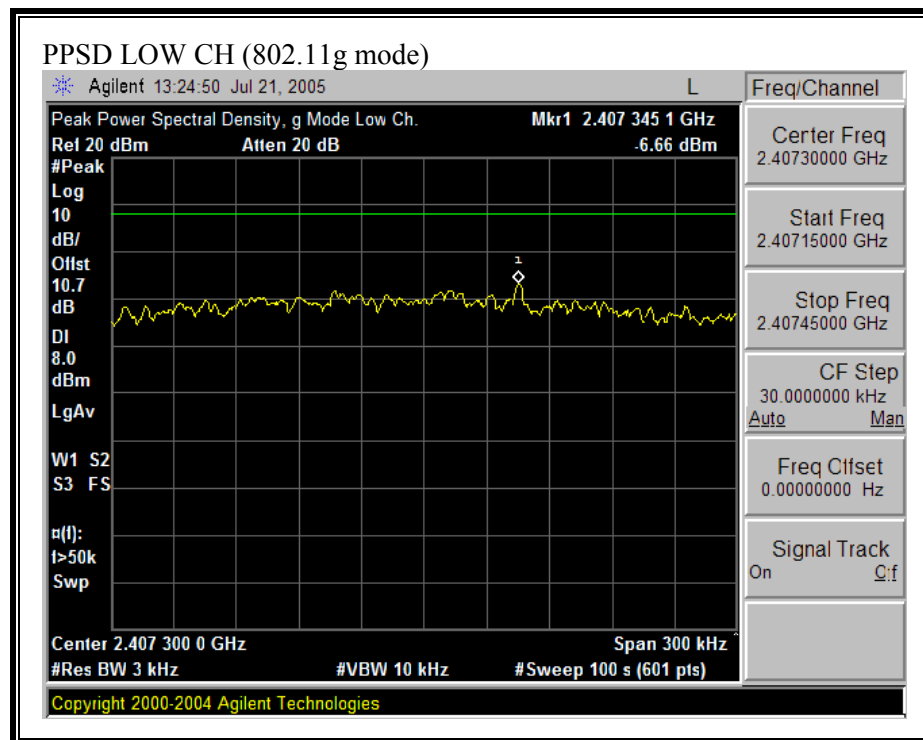


PEAK POWER SPECTRAL DENSITY (802.11g MODE), 2417 MHz, Power = 19 dBm

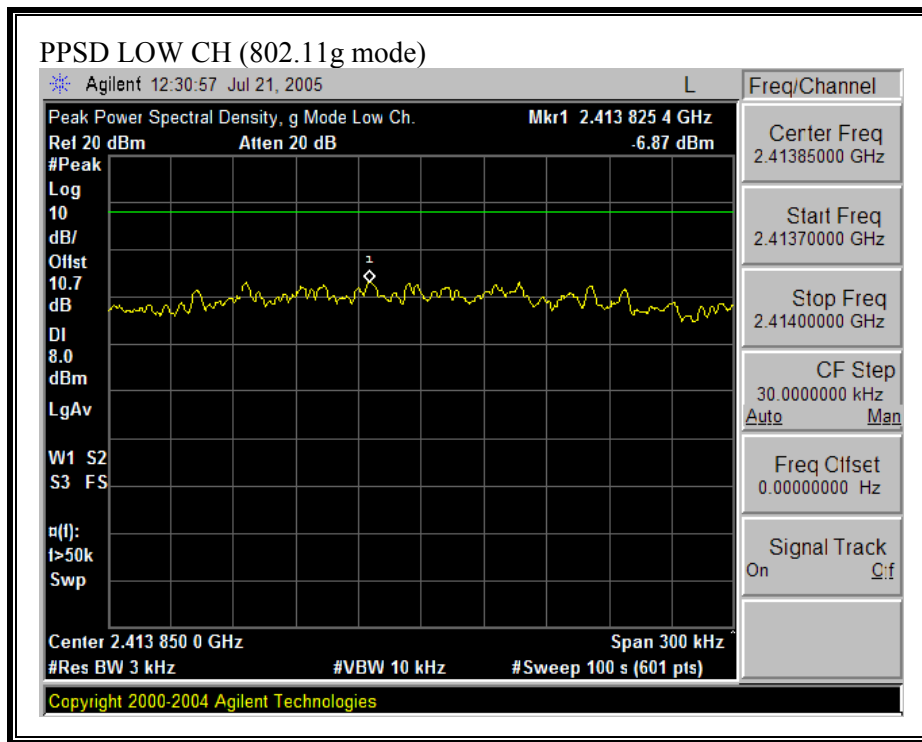


PEAK POWER SPECTRAL DENSITY (802.11g MODE), 2437 MHz, Power = 19 dBm

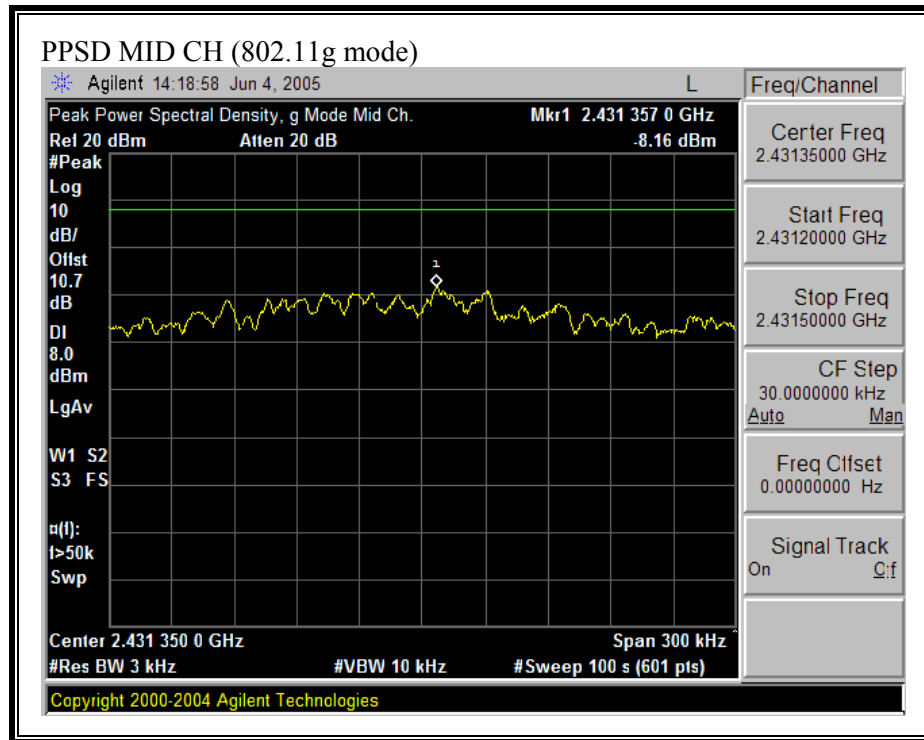


PEAK POWER SPECTRAL DENSITY (802.11g MODE), 2457 MHz, Power = 19 dBm

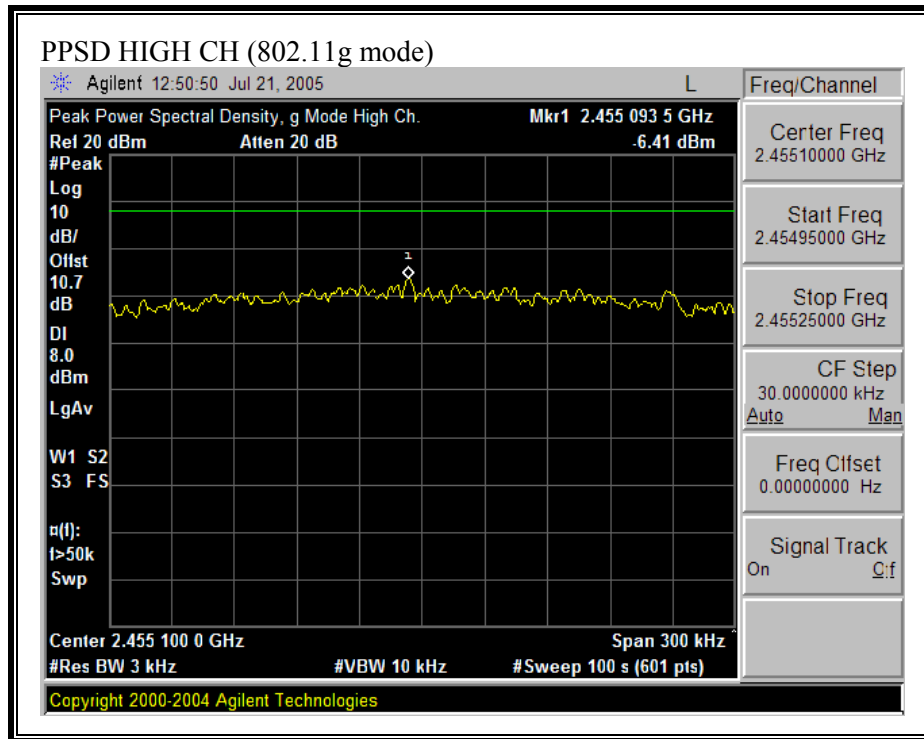

PEAK POWER SPECTRAL DENSITY (802.11g MODE), 2462 MHz, Power = 17 dBm

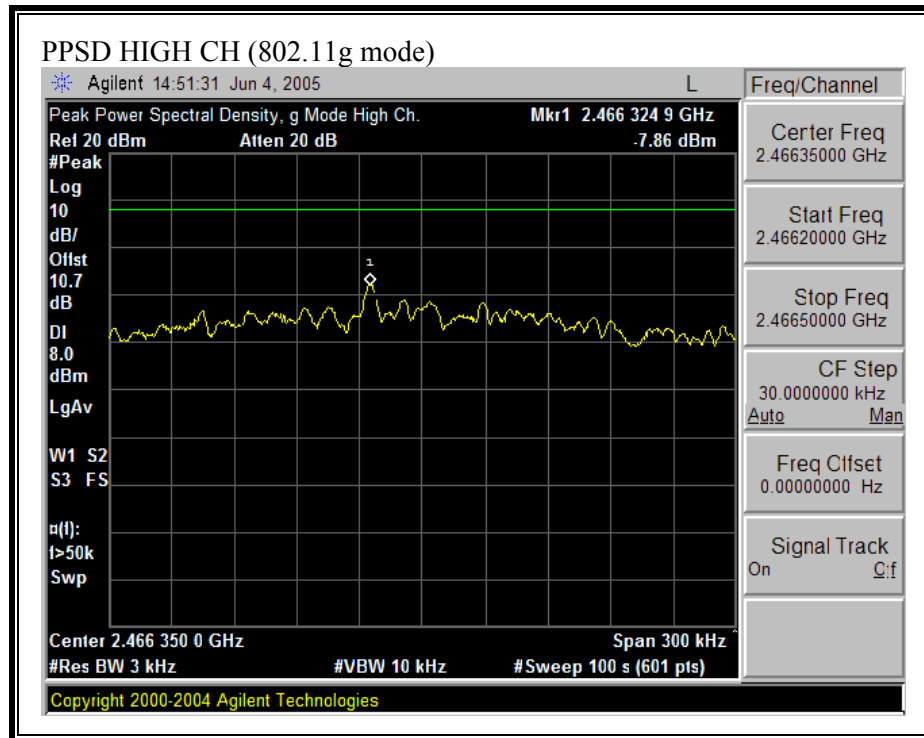

PEAK POWER SPECTRAL DENSITY (802.11g MODE), 2472 MHz, Power = 12 dBm

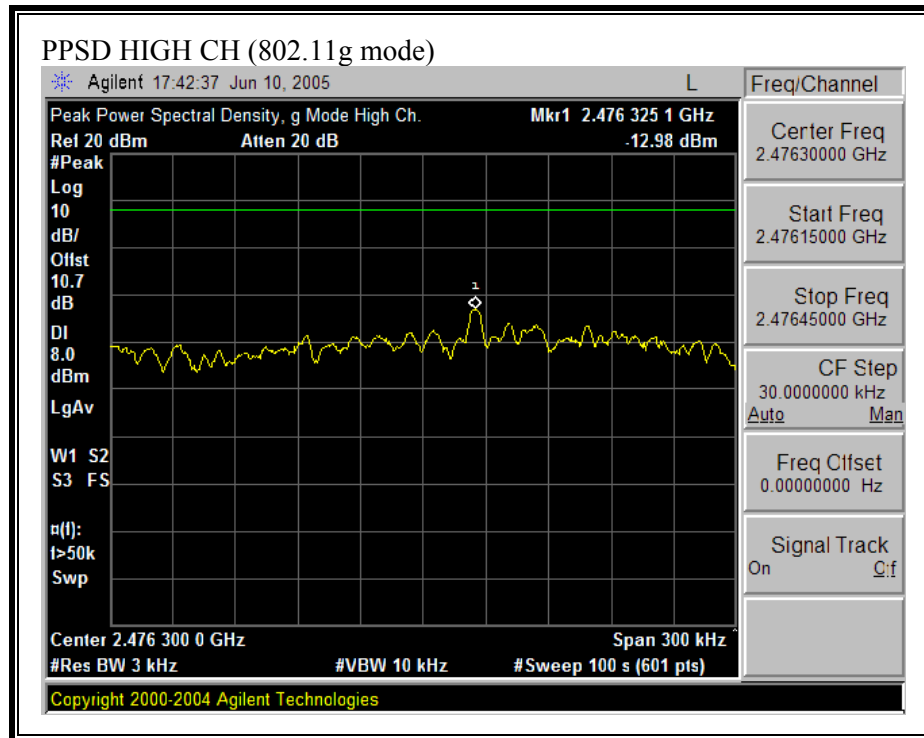

7.1.7. CONDUCTED SPURIOUS EMISSIONS

LIMITS

§15.247 (c) In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

TEST PROCEDURE


The transmitter output is connected to a spectrum analyzer. The resolution bandwidth is set to 100 kHz. The video bandwidth is set to 300 kHz.


The spectrum from 30 MHz to 26 GHz is investigated with the transmitter set to the lowest, middle, and highest channels.

RESULTS


No non-compliance noted:


SPURIOUS EMISSIONS, LOW CHANNEL (802.11b MODE)

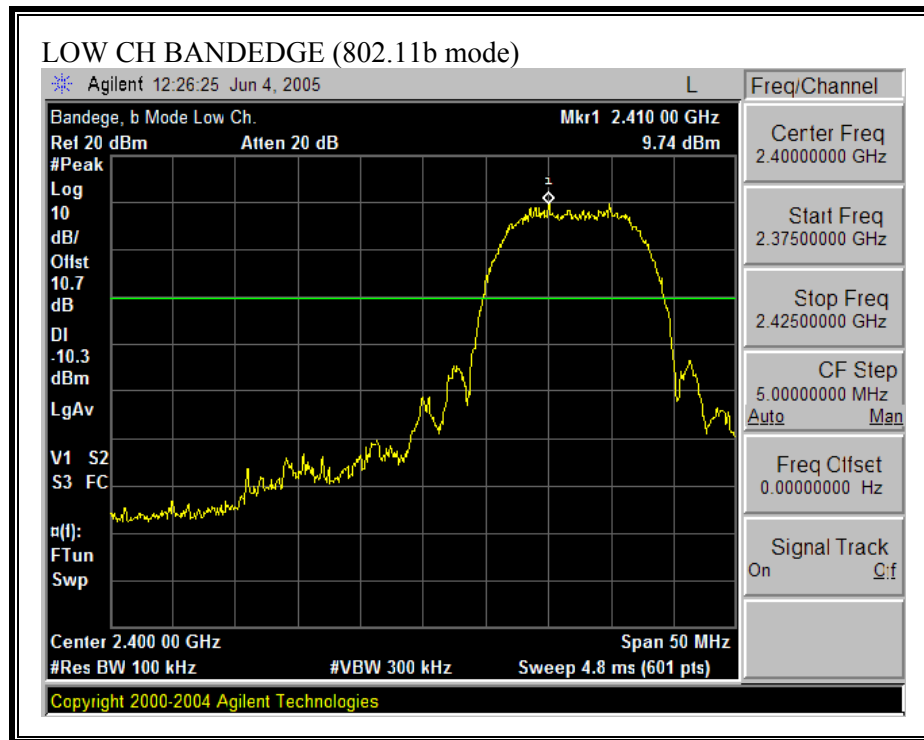

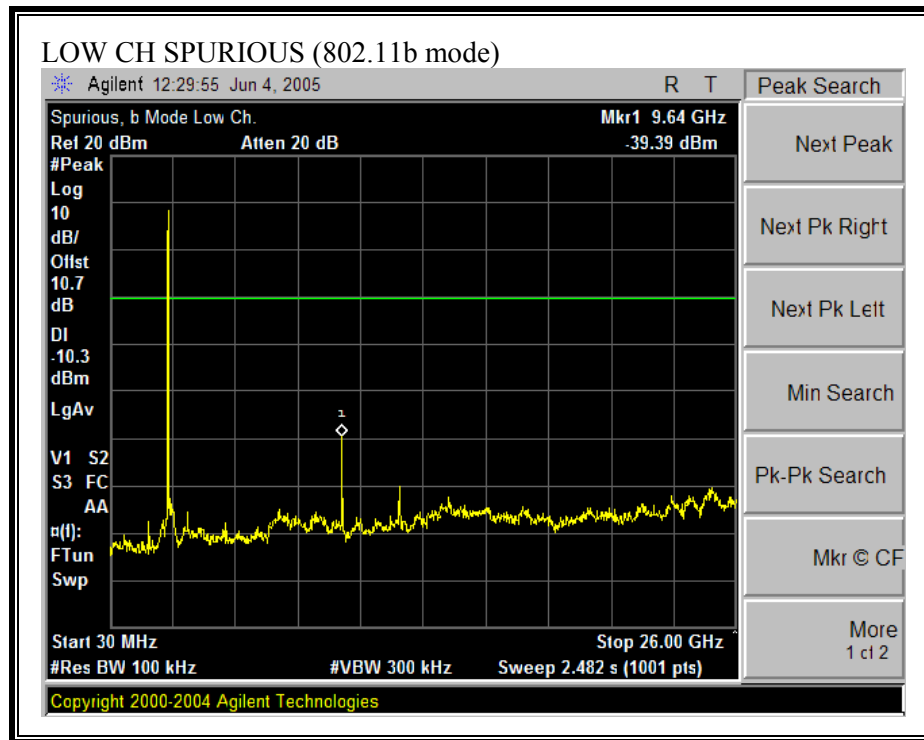



SPURIOUS EMISSIONS, MID CHANNEL (802.11b MODE)

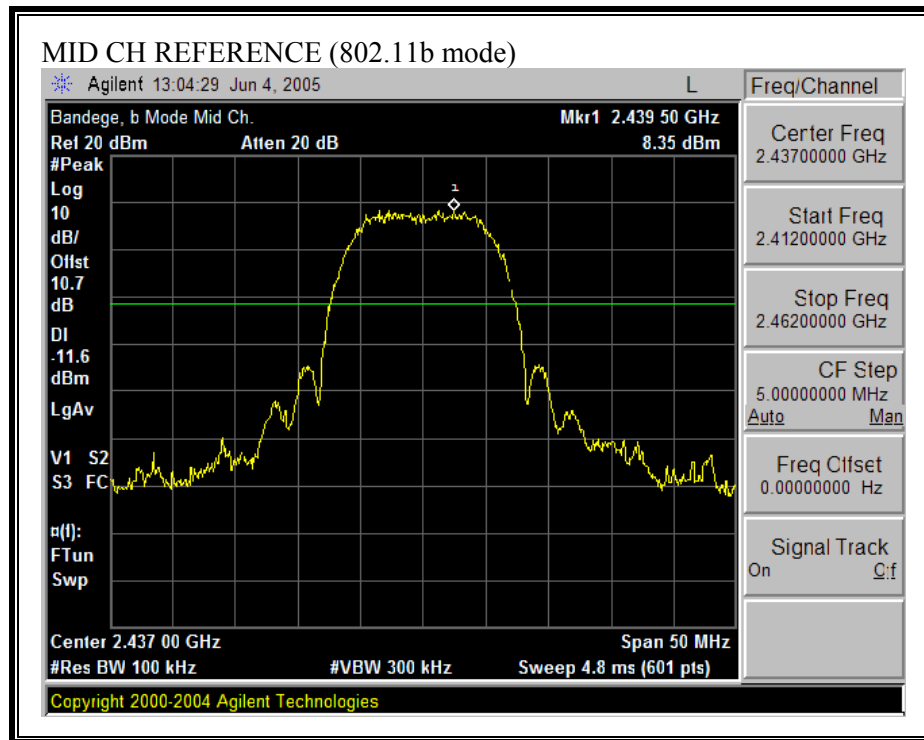

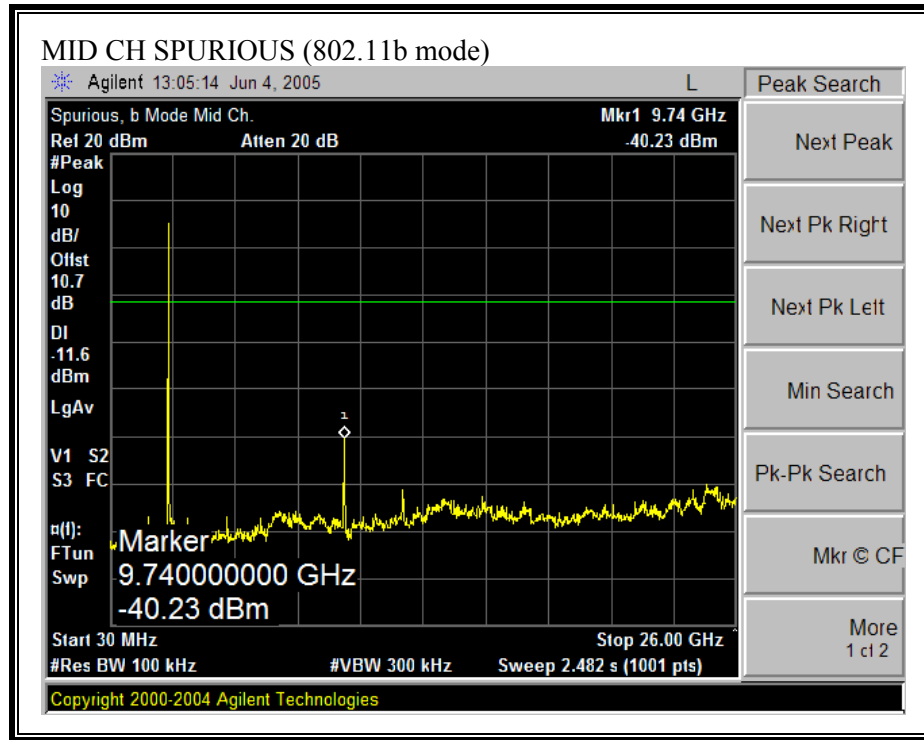



SPURIOUS EMISSIONS, HIGH CHANNEL (802.11b MODE)

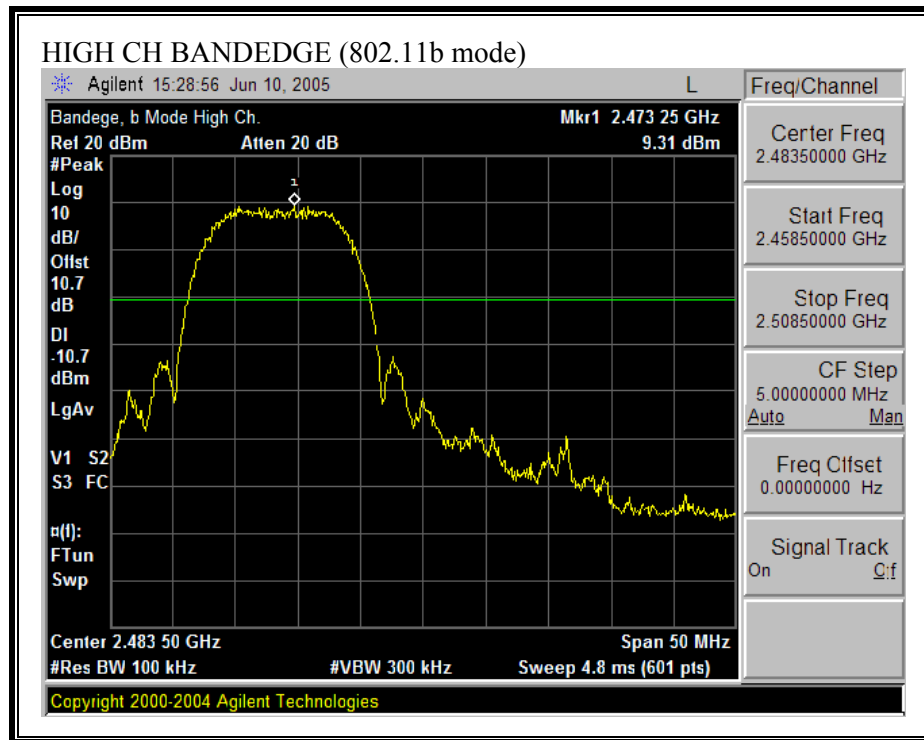

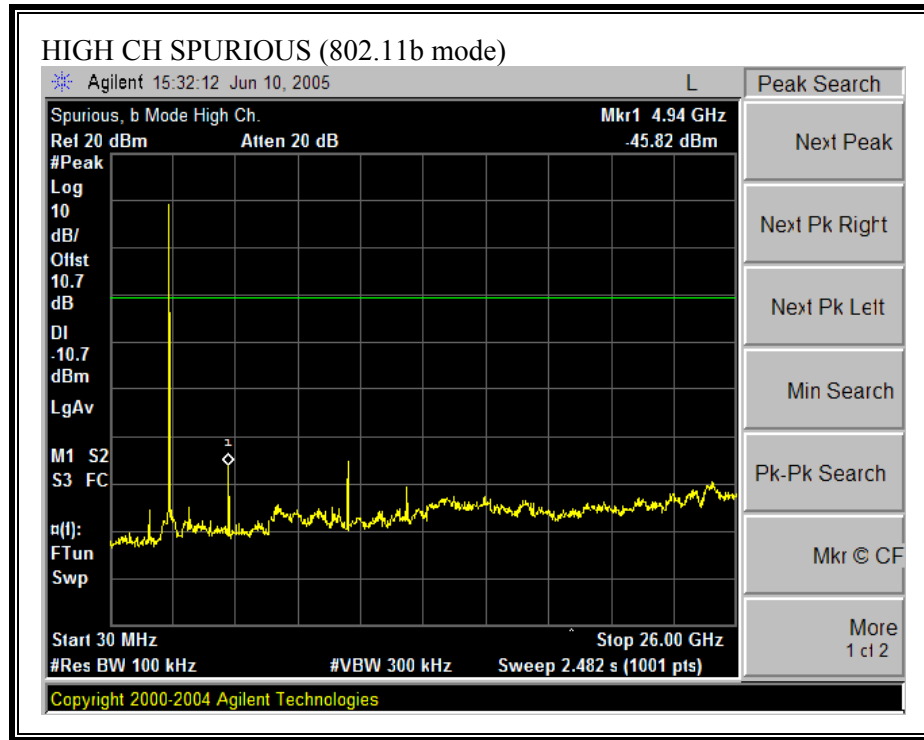



SPURIOUS EMISSIONS, LOW CHANNEL (802.11g MODE)

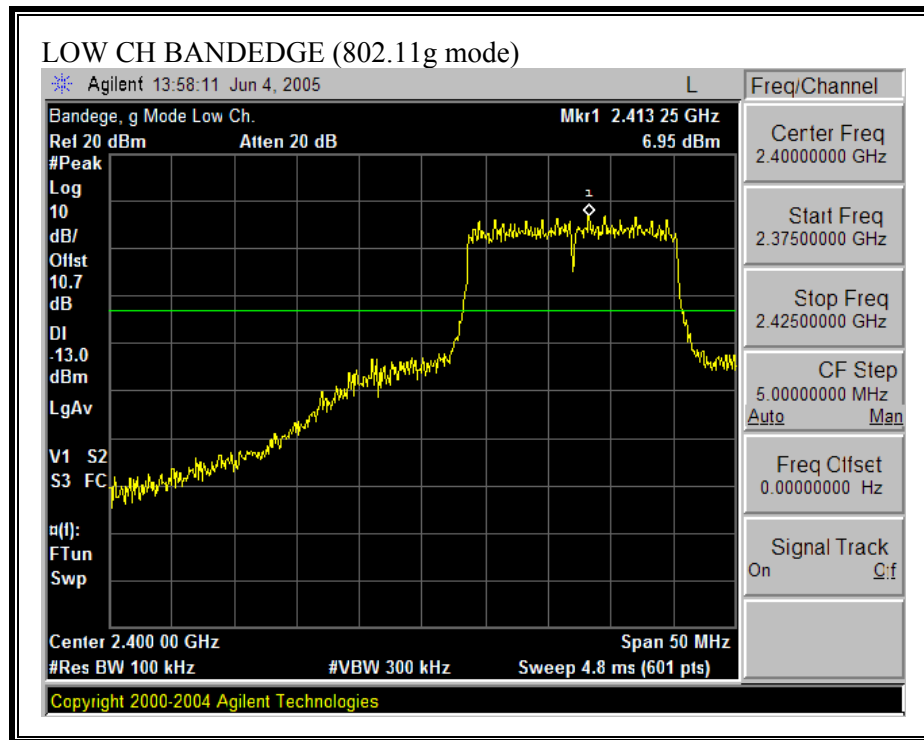

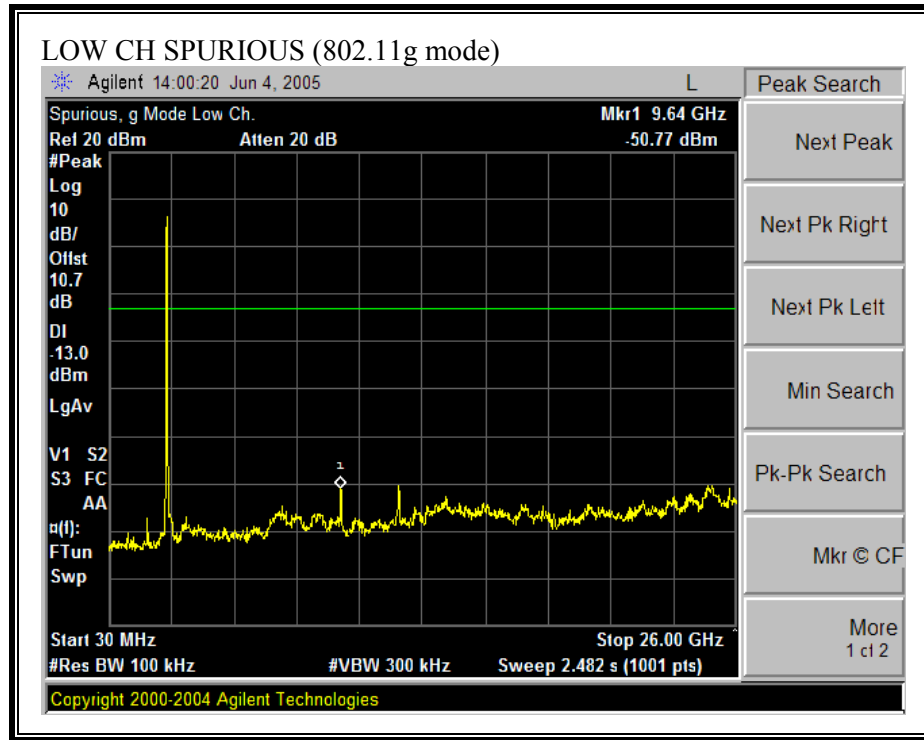



SPURIOUS EMISSIONS, MID CHANNEL (802.11g MODE)

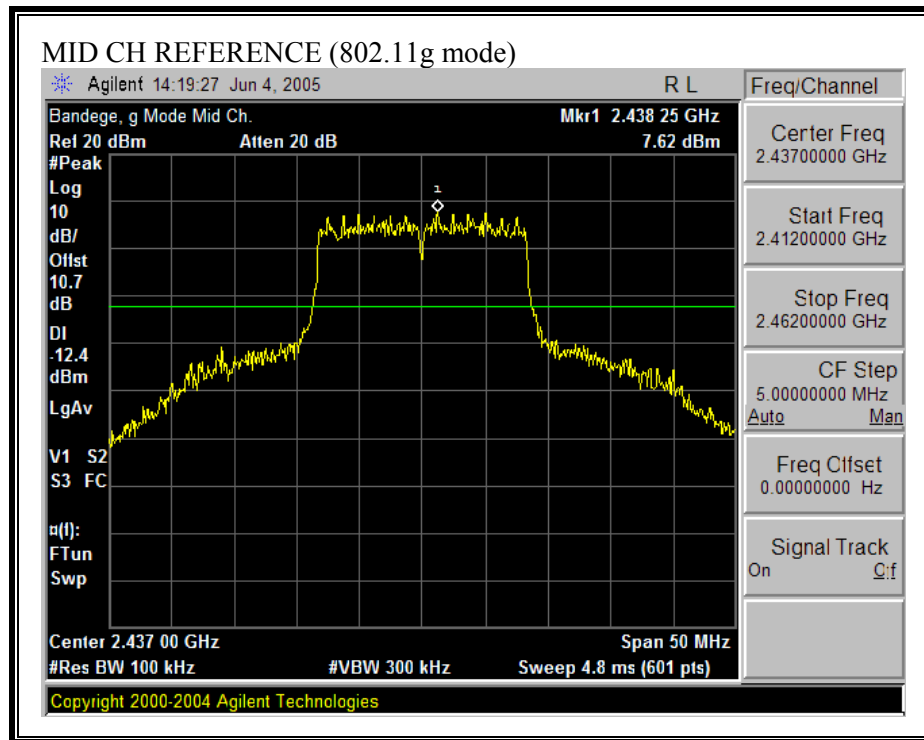

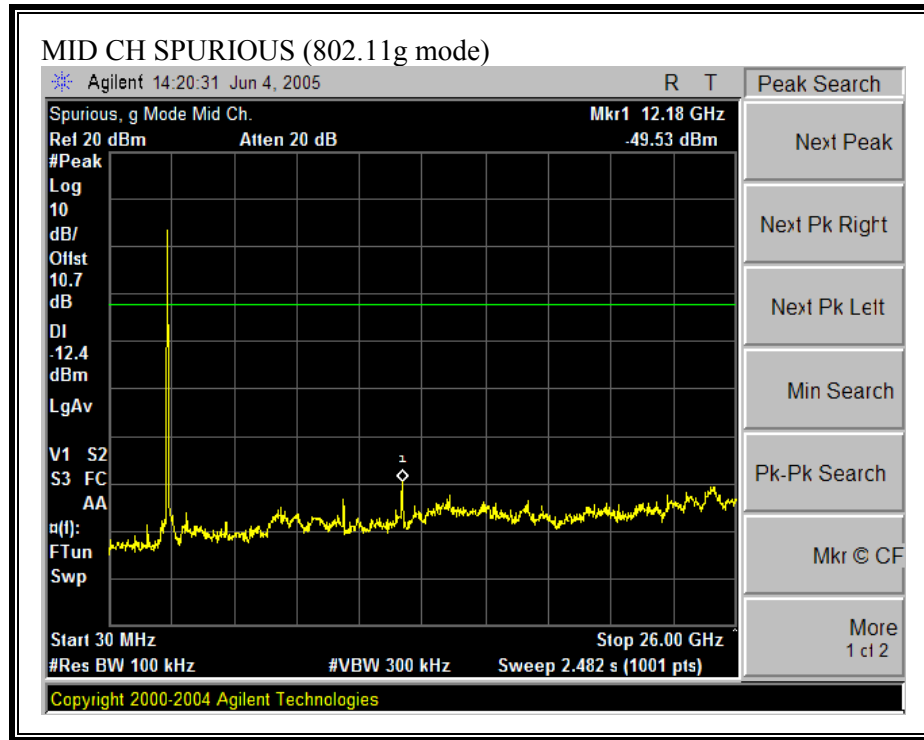

SPURIOUS EMISSIONS, HIGH CHANNEL (802.11g MODE)

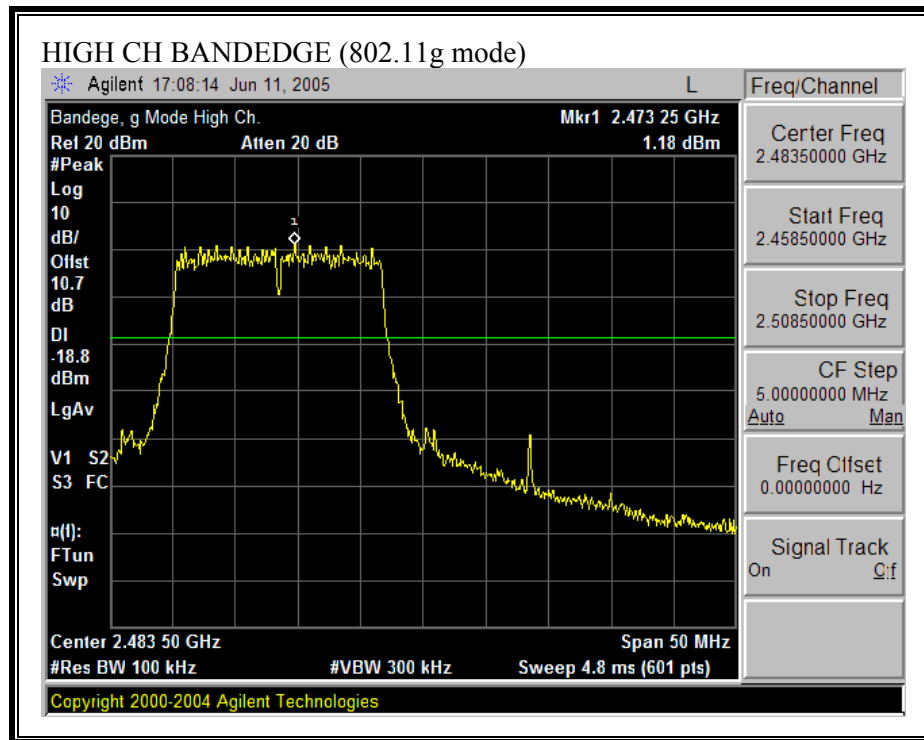

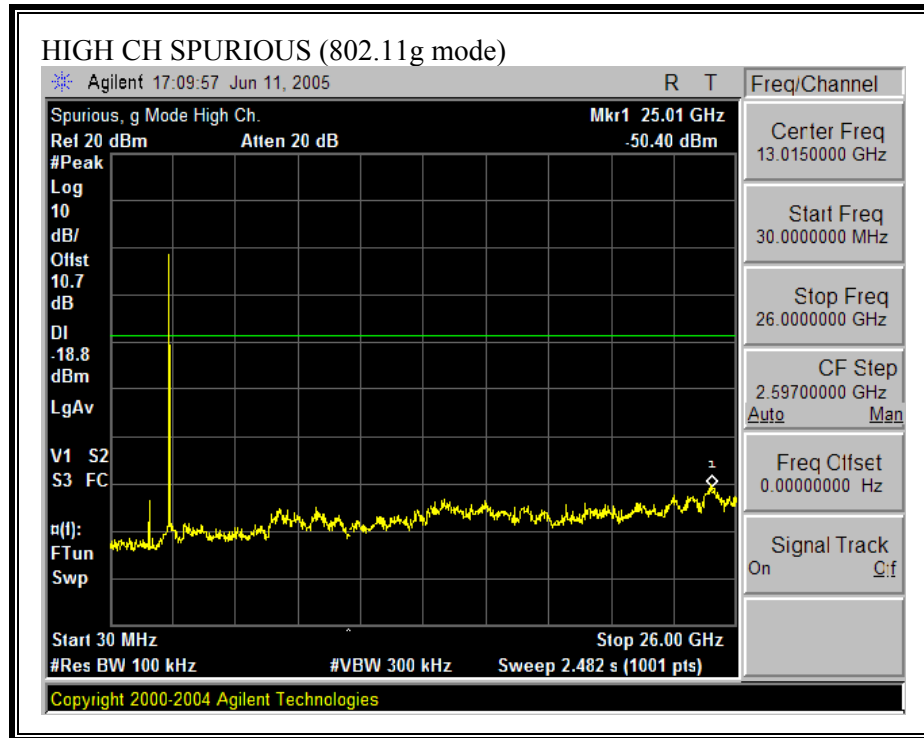

7.2. RADIATED EMISSIONS

7.2.1. TRANSMITTER RADIATED SPURIOUS EMISSIONS

LIMITS

§15.205 (a) Except as shown in paragraph (d) of this section, only spurious emissions are permitted in any of the frequency bands listed below:

MHz	MHz	MHz	GHz
0.090 - 0.110	16.42 - 16.423	399.9 - 410	4.5 - 5.15*
¹ 0.495 - 0.505	16.69475 - 16.69525	608 - 614	5.35 - 5.46
2.1735 - 2.1905	16.80425 - 16.80475	960 - 1240	7.25 - 7.75
4.125 - 4.128	25.5 - 25.67	1300 - 1427	8.025 - 8.5
4.17725 - 4.17775	37.5 - 38.25	1435 - 1626.5	9.0 - 9.2
4.20725 - 4.20775	73 - 74.6	1645.5 - 1646.5	9.3 - 9.5
6.215 - 6.218	74.8 - 75.2	1660 - 1710	10.6 - 12.7
6.26775 - 6.26825	108 - 121.94	1718.8 - 1722.2	13.25 - 13.4
6.31175 - 6.31225	123 - 138	2200 - 2300	14.47 - 14.5
8.291 - 8.294	149.9 - 150.05	2310 - 2390	15.35 - 16.2
8.362 - 8.366	156.52475 - 156.52525	2483.5 - 2500	17.7 - 21.4
8.37625 - 8.38675	156.7 - 156.9	2655 - 2900	22.01 - 23.12
8.41425 - 8.41475	162.0125 - 167.17	3260 - 3267	23.6 - 24.0
12.29 - 12.293	167.72 - 173.2	3332 - 3339	31.2 - 31.8
12.51975 - 12.52025	240 - 285	3345.8 - 3358	36.43 - 36.5
12.57675 - 12.57725	322 - 335.4	3600 - 4400	(²)
13.36 - 13.41			

¹ Until February 1, 1999, this restricted band shall be 0.490-0.510 MHz.

² Above 38.6

§15.205 (b) Except as provided in paragraphs (d) and (e), the field strength of emissions appearing within these frequency bands shall not exceed the limits shown in Section 15.209. At frequencies equal to or less than 1000 MHz, compliance with the limits in Section 15.209 shall be demonstrated using measurement instrumentation employing a CISPR quasi-peak detector. Above 1000 MHz, compliance with the emission limits in Section 15.209 shall be demonstrated based on the average value of the measured emissions. The provisions in Section 15.35 apply to these measurements.

§15.209 (a) Except as provided elsewhere in this Subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table:

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
30 - 88	100 **	3
88 - 216	150 **	3
216 - 960	200 **	3
Above 960	500	3

** Except as provided in paragraph (g), fundamental emissions from intentional radiators operating under this Section shall not be located in the frequency bands 54-72 MHz, 76-88 MHz, 174-216 MHz or 470-806 MHz. However, operation within these frequency bands is permitted under other sections of this Part, e.g., Sections 15.231 and 15.241.

§15.209 (b) In the emission table above, the tighter limit applies at the band edges.

TEST PROCEDURE

The EUT is placed on a non-conducting table 80 cm above the ground plane. The antenna to EUT distance is 3 meters. The EUT is configured in accordance with ANSI C63.4. The EUT is set to transmit in a continuous mode.

For measurements below 1 GHz the resolution bandwidth is set to 100 kHz for peak detection measurements or 120 kHz for quasi-peak detection measurements. Peak detection is used unless otherwise noted as quasi-peak.

For measurements above 1 GHz the resolution bandwidth is set to 1 MHz, then the video bandwidth is set to 1 MHz for peak measurements and 10 Hz for average measurements.

The spectrum from 30 MHz to 26 GHz is investigated with the transmitter set to the lowest, middle, and highest channels in the 2.4 GHz band.

The spectrum from 30 MHz to 40 GHz is investigated with the transmitter set to the lowest, middle, and highest channels in each 5 GHz band.


The frequency range of interest is monitored at a fixed antenna height and EUT azimuth. The EUT is rotated through 360 degrees to maximize emissions received. The antenna is scanned from 1 to 4 meters above the ground plane to further maximize the emission. Measurements are made with the antenna polarized in both the vertical and the horizontal positions.


7.2.2. TRANSMITTER ABOVE 1 GHz FOR 2400 TO 2483.5 MHz BAND

11b_ CHANNEL 1, 10, 11 and 13


CH1, 2412 MHz POWER = 19 dBm


RESTRICTED BANDEDGE (b MODE, LOW CHANNEL, HORIZONTAL)

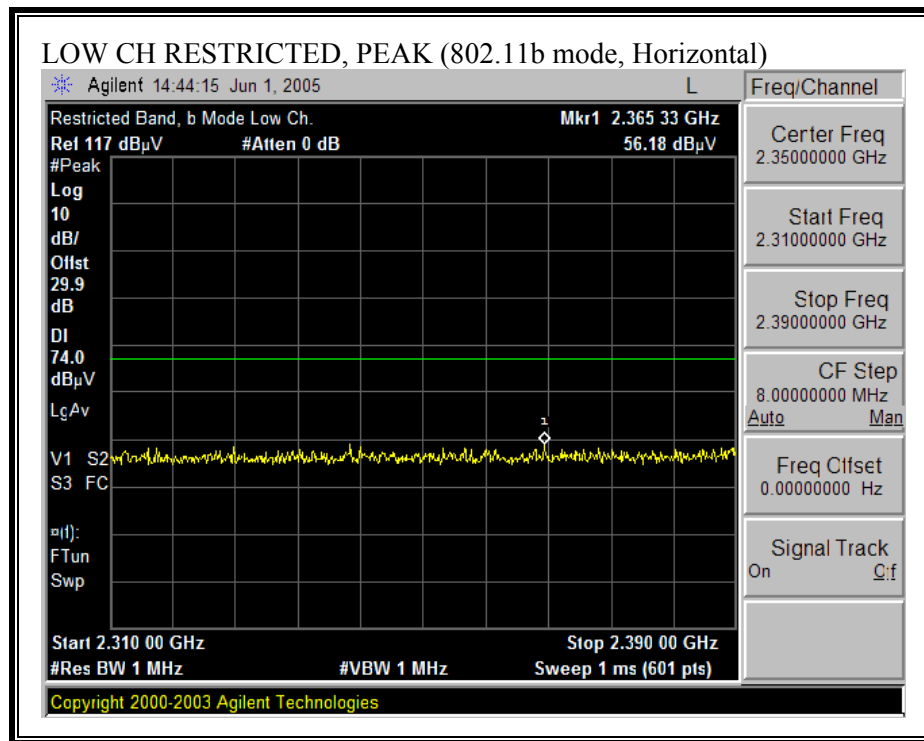

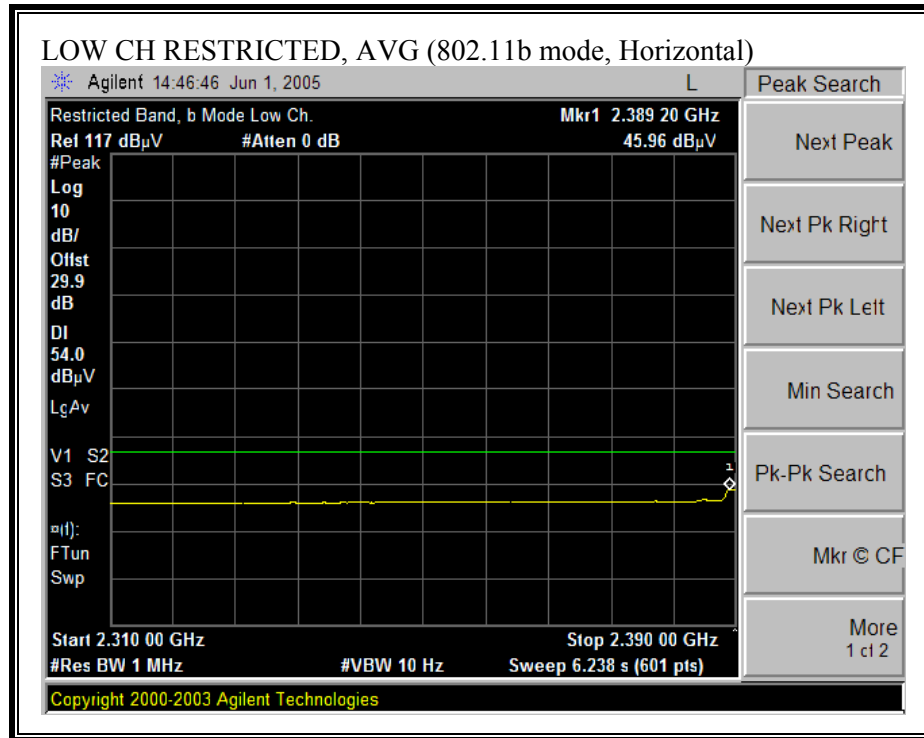


RESTRICTED BANDEDGE (b MODE, LOW CHANNEL, VERTICAL)

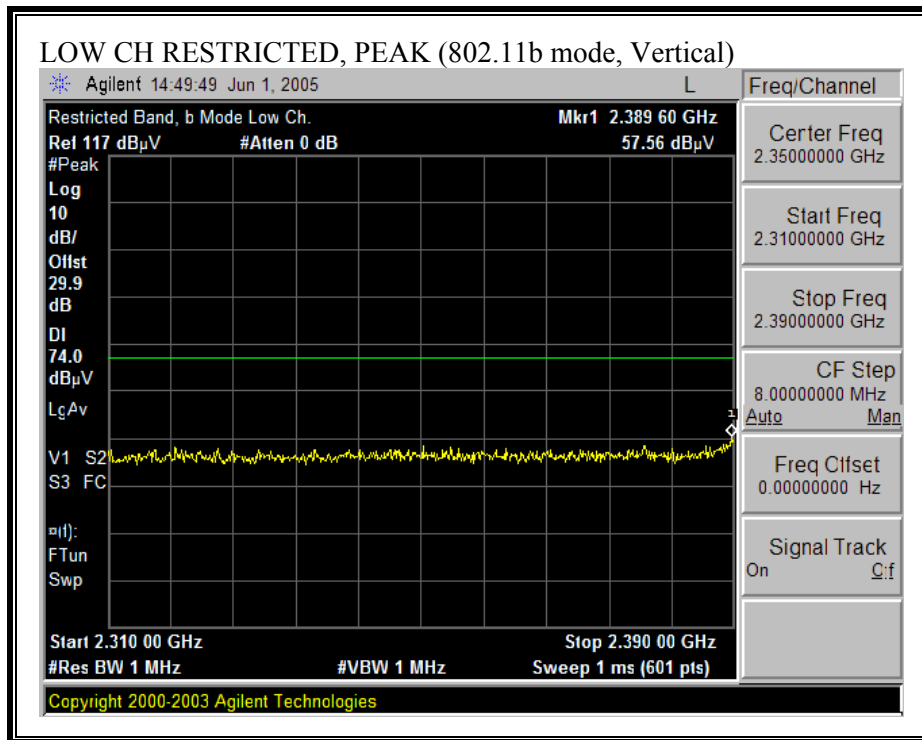


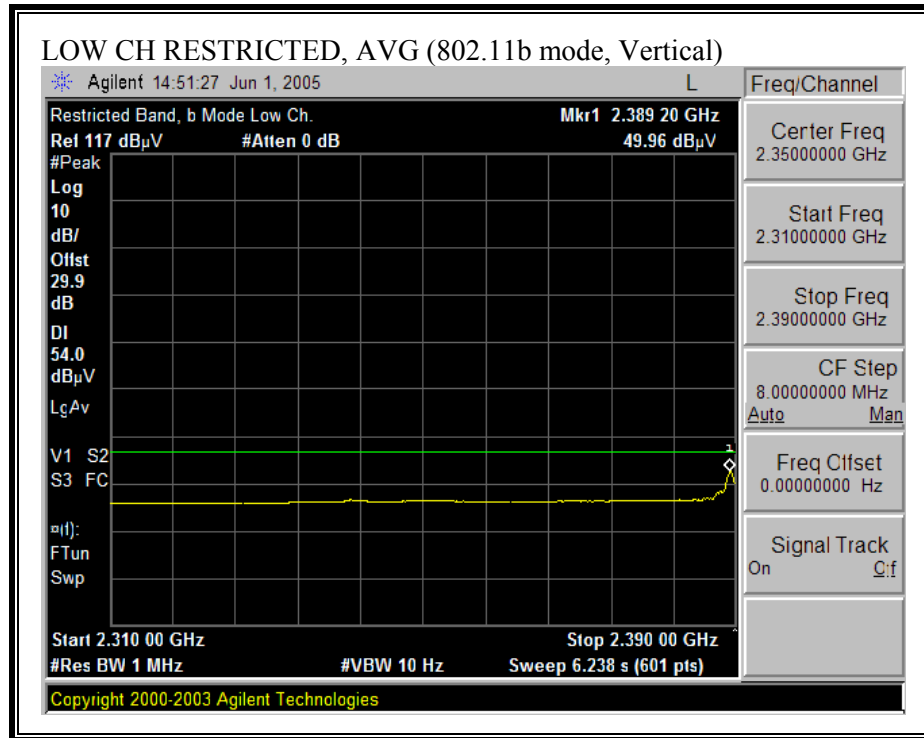


CH 10, 2457 MHz POWER = 19 dBm


RESTRICTED BANDEDGE (b MODE, HIGH CHANNEL, HORIZONTAL)

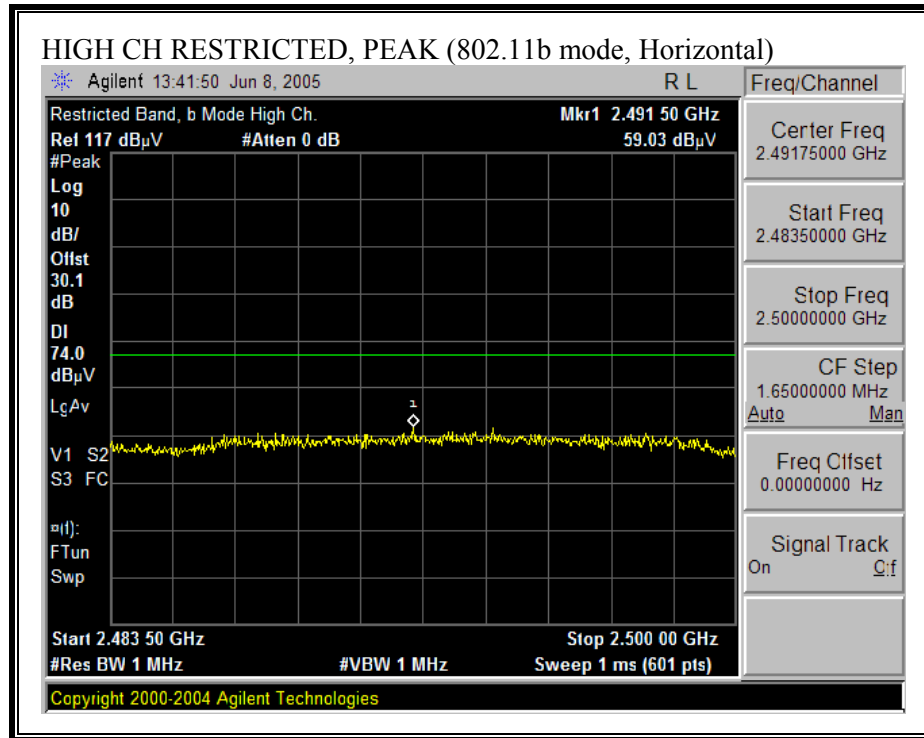

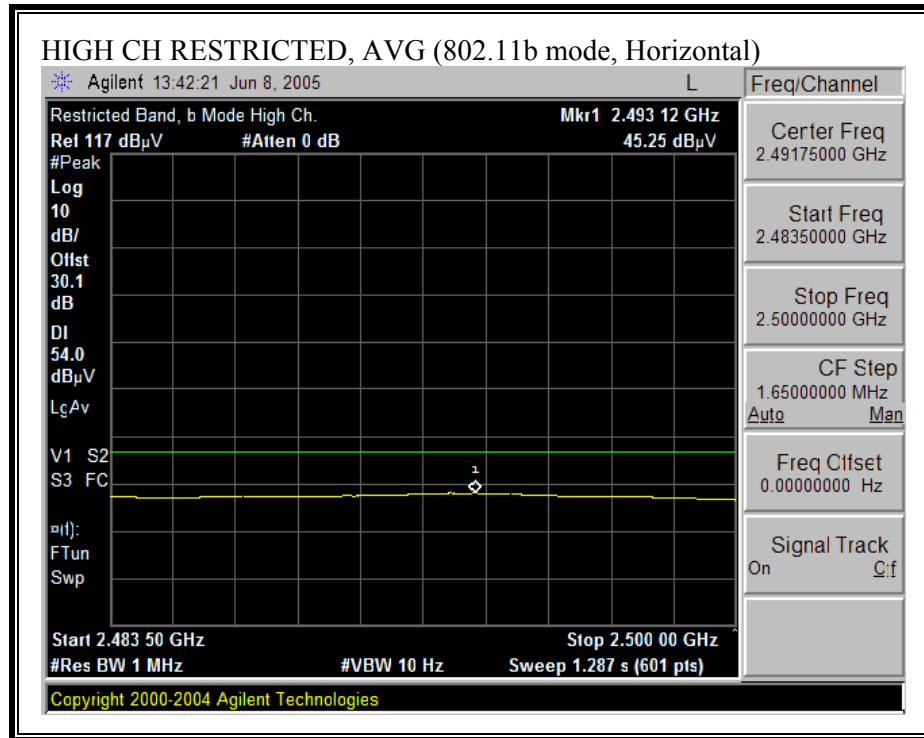


RESTRICTED BANDEDGE (b MODE, HIGH CHANNEL, VERTICAL)

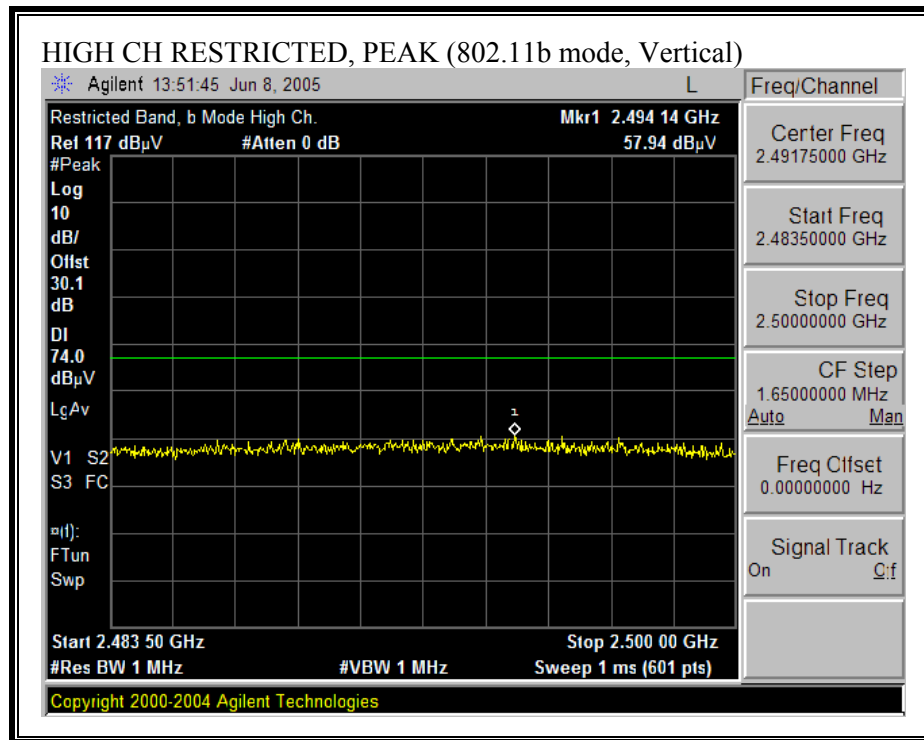


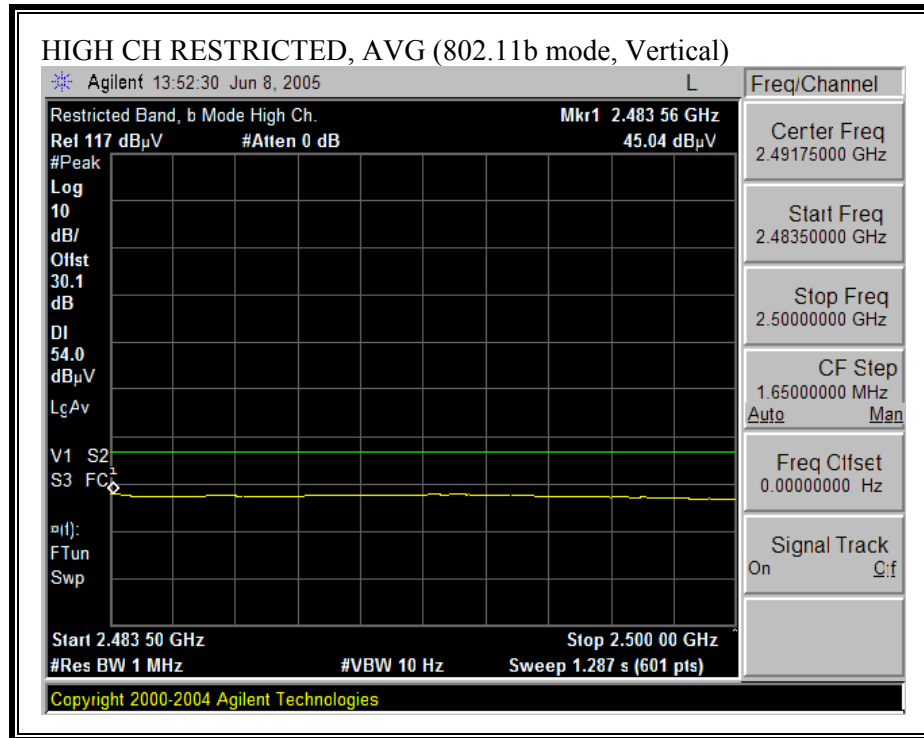


CH 11, 2462 MHz POWER = 18.5 dBm


RESTRICTED BANDEDGE (b MODE, HIGH CHANNEL, HORIZONTAL)

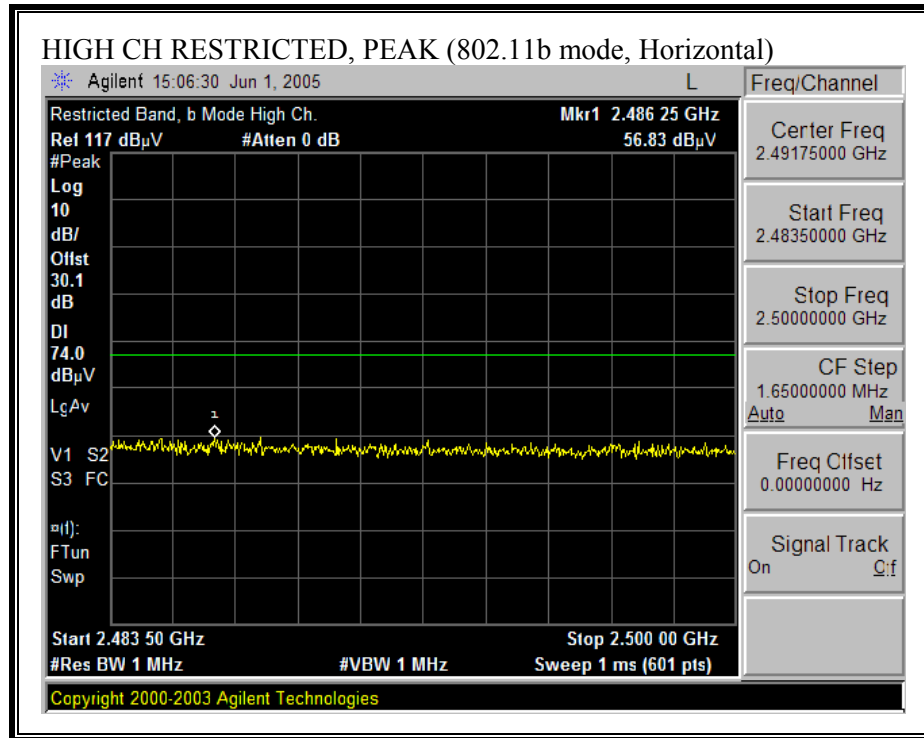

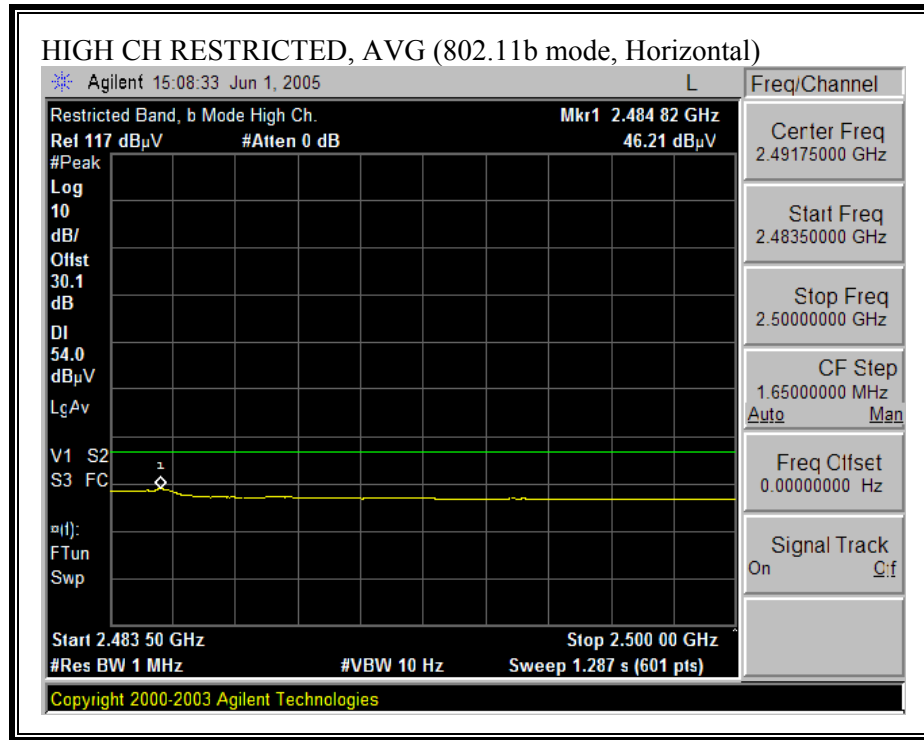


RESTRICTED BANDEDGE (b MODE, HIGH CHANNEL, VERTICAL)

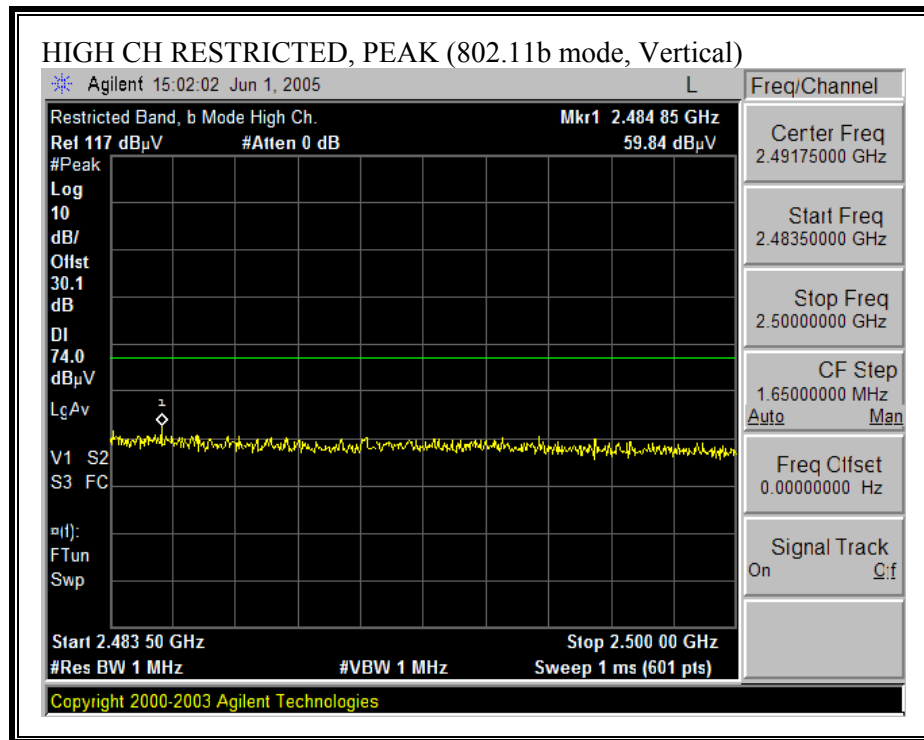


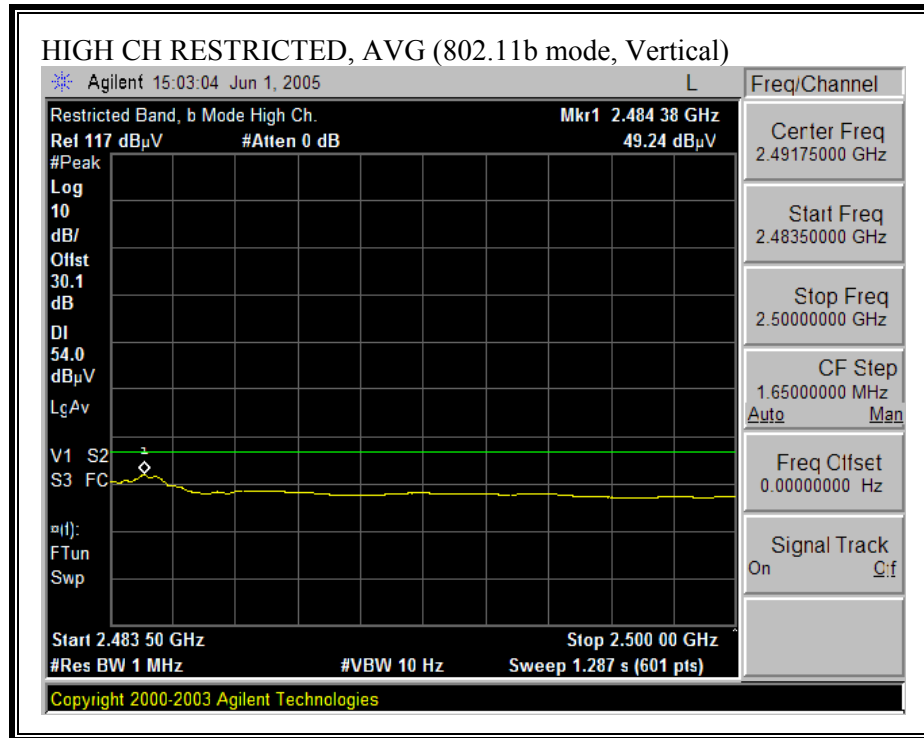


CH 13, 2472 MHz POWER = 12 dBm


RESTRICTED BANDEDGE (b MODE, HIGH CHANNEL, HORIZONTAL)

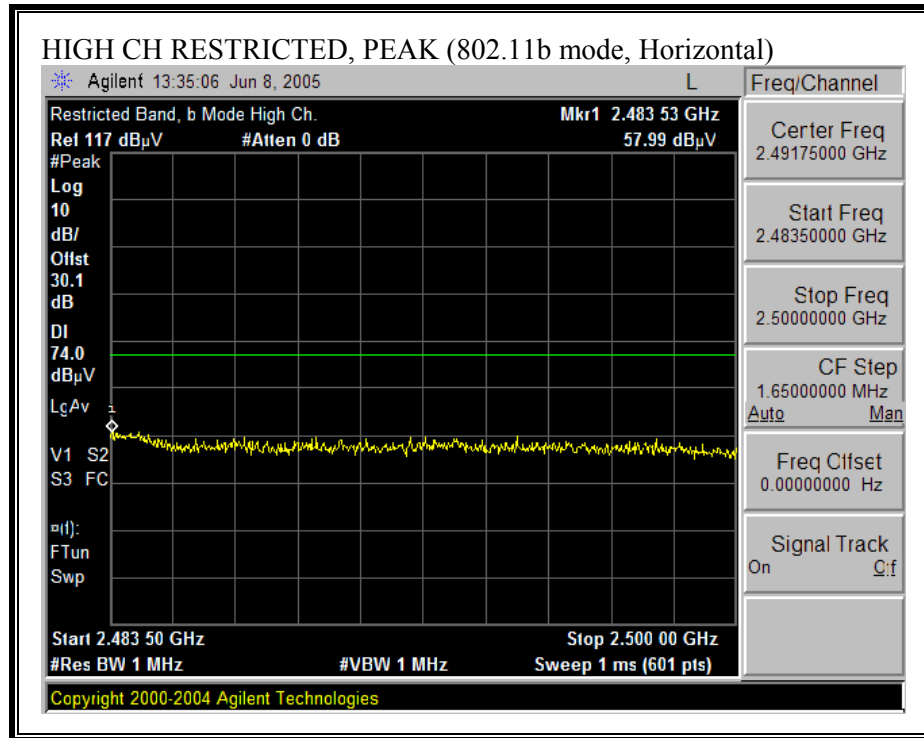

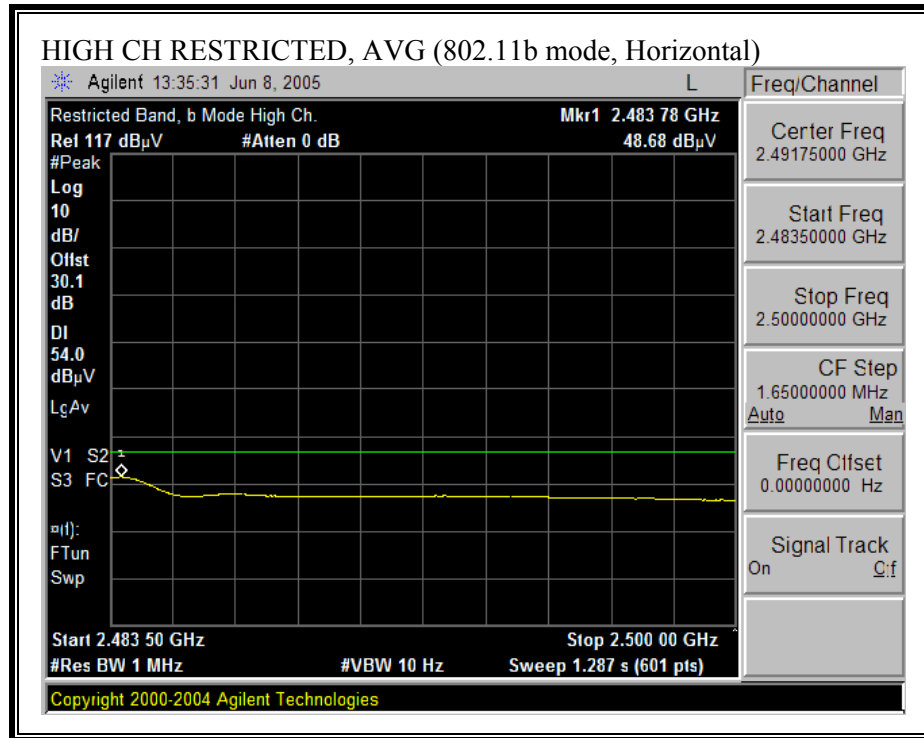

RESTRICTED BANDEDGE (b MODE, HIGH CHANNEL, VERTICAL)

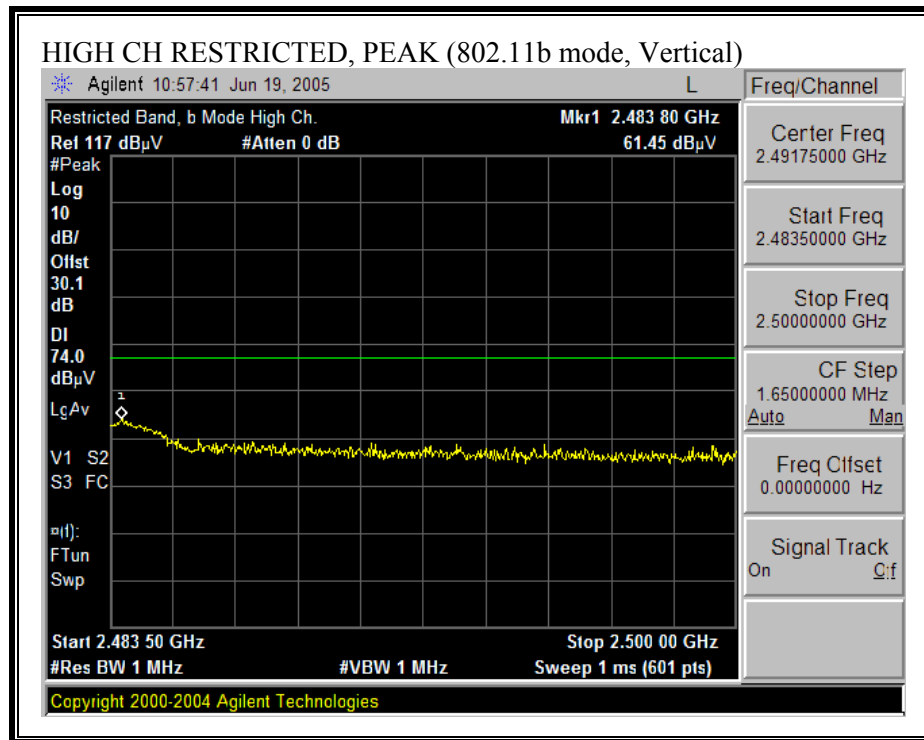

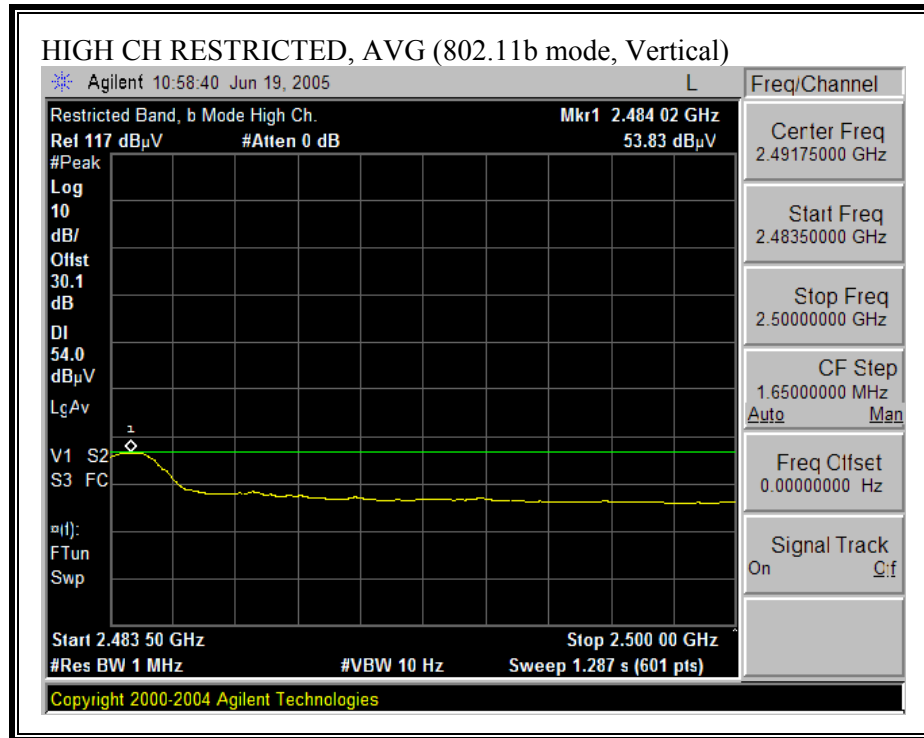

HARMONICS AND SPURIOUS EMISSIONS (b MODE)


Power: Channel 1, 6, & 13 = 19dBm_Bit Rate: 11Mbps for Peak and 1Mbps for Average reading.


06/18/05 High Frequency Measurement																	
Compliance Certification Services, Morgan Hill Open Field Site																	
Test Engr: VIEN TRAN Project #: 05U3484 Company: BROADCOM EUT Descrp.:802.11bg Mini PCI Express Card EUT M/N:BCM94311MCG Test Target:FCC 15.247 Mode Oper:11b_TX LOW, MID, HI CHANNEL _ HARMONIC & SPUR																	
Test Equipment:																	
EMCO Horn 1-18GHz			Pre-amplifier 1-26GHz			Pre-amplifier 26-40GHz			Horn > 18GHz			Limit					
T60; S/N: 2238 @3m			T63 Miteq 646456									FCC 15.205					
Hi Frequency Cables 2 foot cable 3 foot cable 4 foot cable 12 foot cable 2_Vien 12_Vien HPF RejectFilter HPF_4.0GHz R_002																	
Peak Measurements RBW=VBW=1MHz Average Measurements RBW=1MHz ; VBW=10Hz																	
f GHz	Dist (m)	Read Pk dBuV	Read Avg. dBuV	AF dB/m	CL dB	Amp dB	D Corr dB	Filtr dB	Peak dBuV/m	Avg dBuV/m	Pk Lim dBuV/m	Avg Lim dBuV/m	Pk Mar dB	Avg Mar dB	Notes (V/H)		
LOW CH=2412MHz																	
4.824	3.0	54.5	49.0	33.6	3.1	-37.9	0.0	0.6	53.9	48.4	74	54	-20.1	-5.6	H		
12.060	3.0	45.0	33.0	38.4	5.6	-37.6	0.0	0.9	52.3	40.3	74	54	-21.7	-13.7	H, NOISE FLOOR		
4.824	3.0	55.3	50.7	33.6	3.1	-37.9	0.0	0.6	54.7	50.1	74	54	-19.3	-3.9	V		
12.060	3.0	45.9	34.0	38.4	5.6	-37.6	0.0	0.9	53.2	41.3	74	54	-20.8	-12.7	V, NOISE FLOOR		
MID CH=2437MHz																	
4.874	3.0	53.2	49.8	33.7	3.1	-37.9	0.0	0.6	52.7	49.3	74	54	-21.3	-4.7	H		
7.311	3.0	47.0	38.0	36.2	3.7	-36.9	0.0	0.6	50.6	41.6	74	54	-23.4	-12.4	H		
12.185	3.0	45.0	33.9	38.4	5.6	-37.7	0.0	0.9	52.2	41.1	74	54	-21.8	-12.9	H, NOISE FLOOR		
4.874	3.0	54.9	51.1	33.7	3.1	-37.9	0.0	0.6	54.4	50.6	74	54	-19.6	-3.4	V		
7.311	3.0	47.6	37.0	36.2	3.7	-36.9	0.0	0.6	51.2	40.6	74	54	-22.8	-13.4	V		
12.185	3.0	46.0	34.5	38.4	5.6	-37.7	0.0	0.9	53.2	41.7	74	54	-20.8	-12.3	V, NOISE FLOOR		
HI CH=2472MHz																	
4.944	3.0	52.2	47.0	33.7	3.1	-37.9	0.0	0.6	51.8	46.6	74	54	-22.2	-7.4	H		
7.416	3.0	46.0	37.0	36.3	3.8	-36.8	0.0	0.6	49.8	40.8	74	54	-24.2	-13.2	H		
12.360	3.0	46.0	33.0	38.4	5.6	-37.8	0.0	0.9	53.1	40.1	74	54	-20.9	-13.9	H, NOISE FLOOR		
4.944	3.0	54.0	49.9	33.7	3.1	-37.9	0.0	0.6	53.6	49.5	74	54	-20.4	-4.5	V		
7.416	3.0	47.0	38.0	36.3	3.8	-36.8	0.0	0.6	50.8	41.8	74	54	-23.2	-12.2	V		
12.360	3.0	44.6	34.0	38.4	5.6	-37.8	0.0	0.9	51.7	41.1	74	54	-22.3	-12.9	V, NOISE FLOOR		
NO OTHER EMISSIONS WERE DETECTED AFTER 5TH HARMONIC																	
f	Measurement Frequency					Amp	Preamp Gain					Avg Lim	Average Field Strength Limit				
Dist	Distance to Antenna					D Corr	Distance Correct to 3 meters					Pk Lim	Peak Field Strength Limit				
Read	Analyzer Reading					Avg	Average Field Strength @ 3 m					Avg Mar	Margin vs. Average Limit				
AF	Antenna Factor					Peak	Calculated Peak Field Strength					Pk Mar	Margin vs. Peak Limit				
CL	Cable Loss					HPF	High Pass Filter										

11g CHANNEL 1, 2, 10, 11, and 13


CH 1, 2412 MHz, TRANSMITTING POWER = 18 dBm


RESTRICTED BANDEDGE (g MODE, LOW CHANNEL, HORIZONTAL)

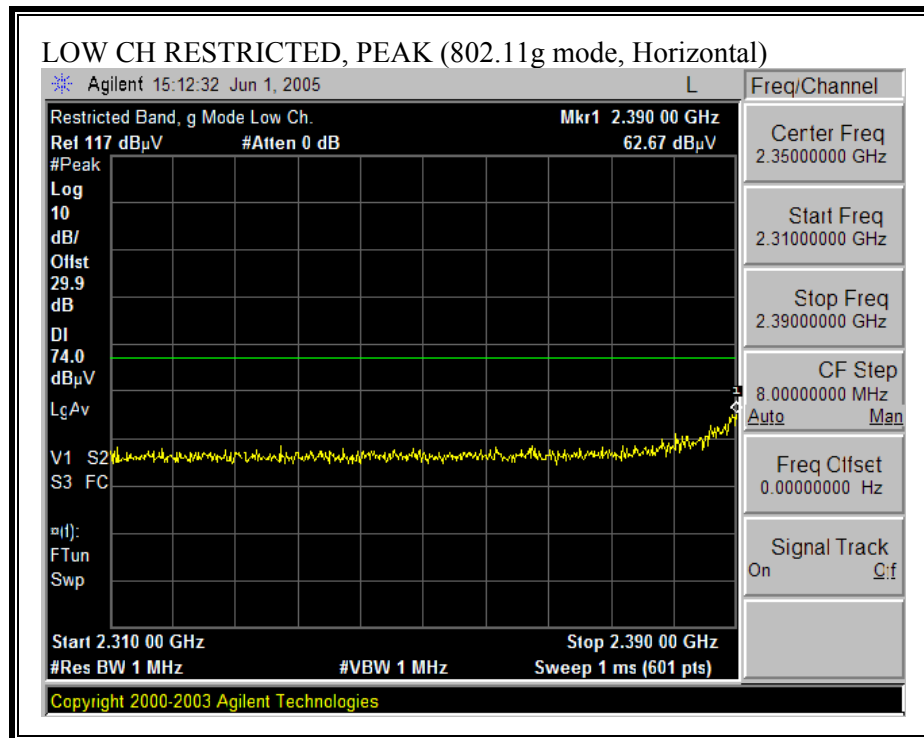

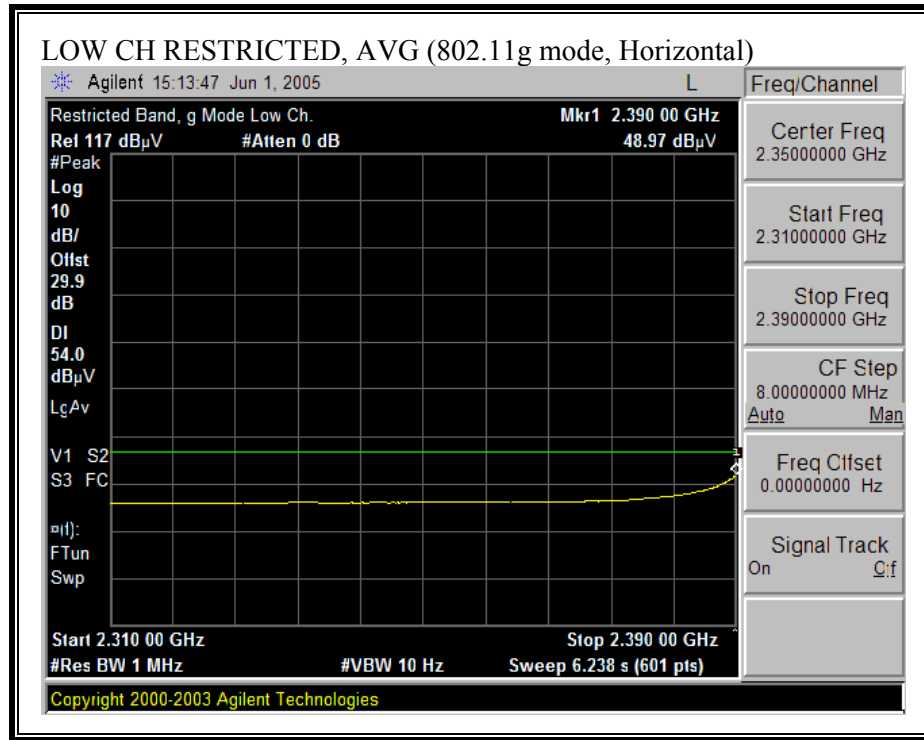


RESTRICTED BANDEDGE (g MODE, LOW CHANNEL, VERTICAL)

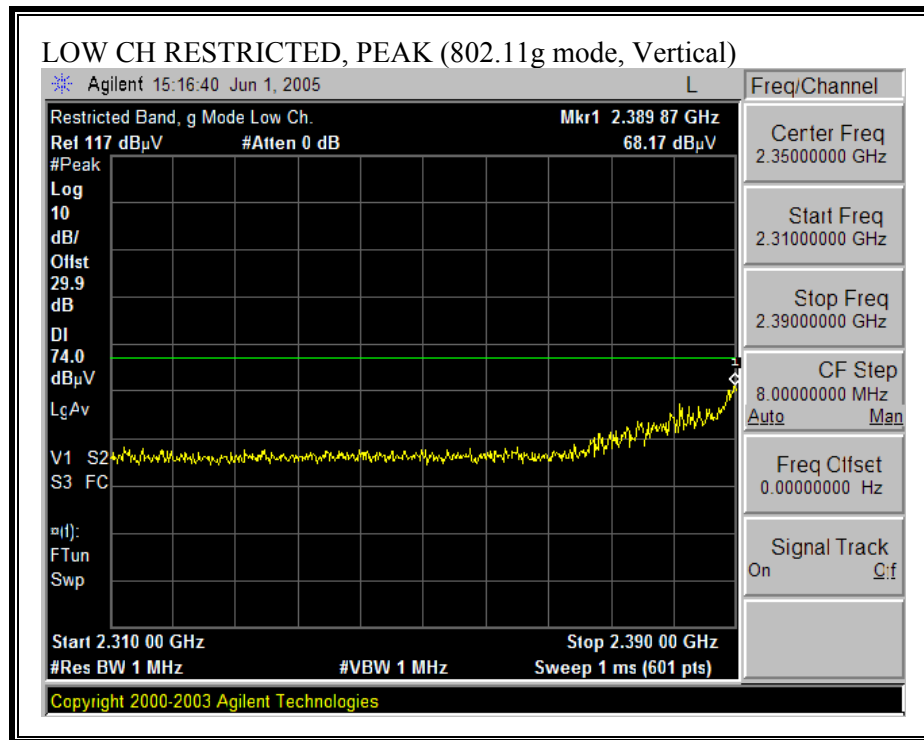


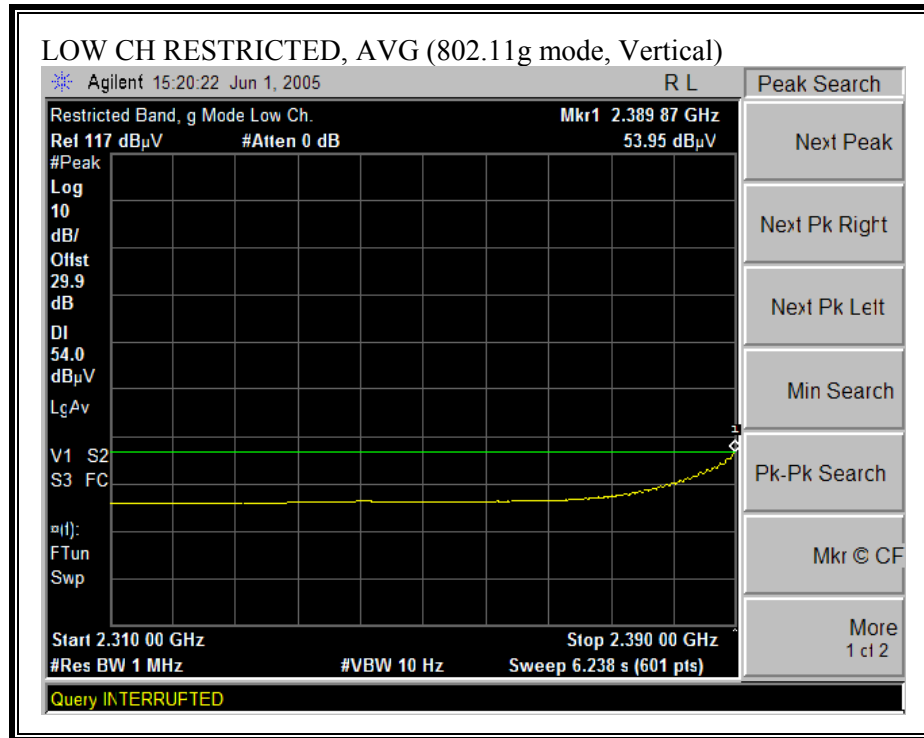


CH 2, 2417 MHz, TRANSMITTING POWER = 19 dBm


RESTRICTED BANDEDGE (g MODE, LOW CHANNEL, HORIZONTAL)

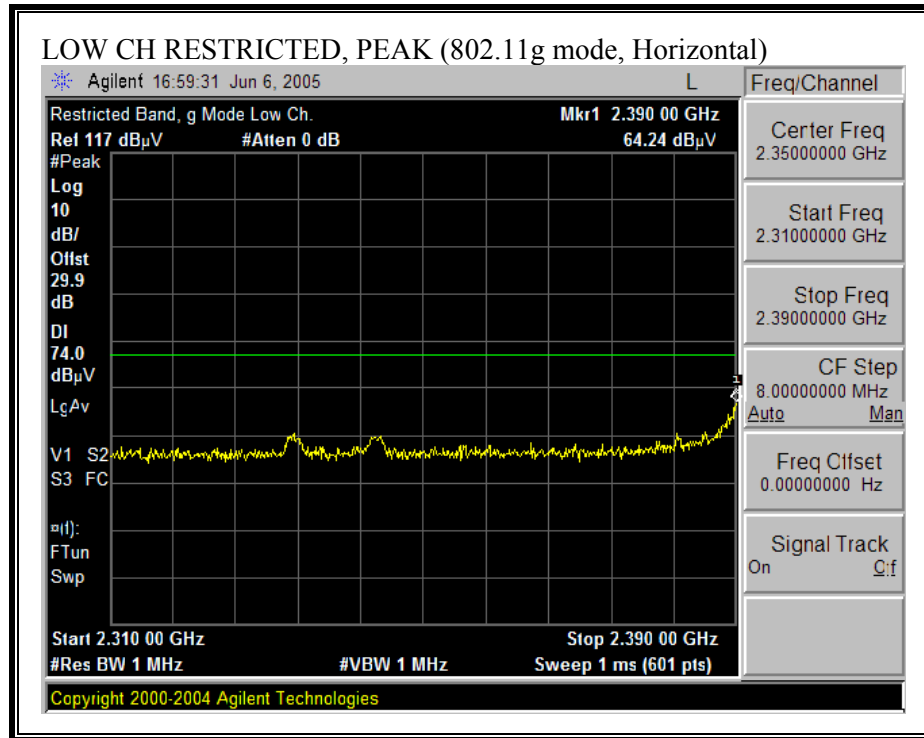

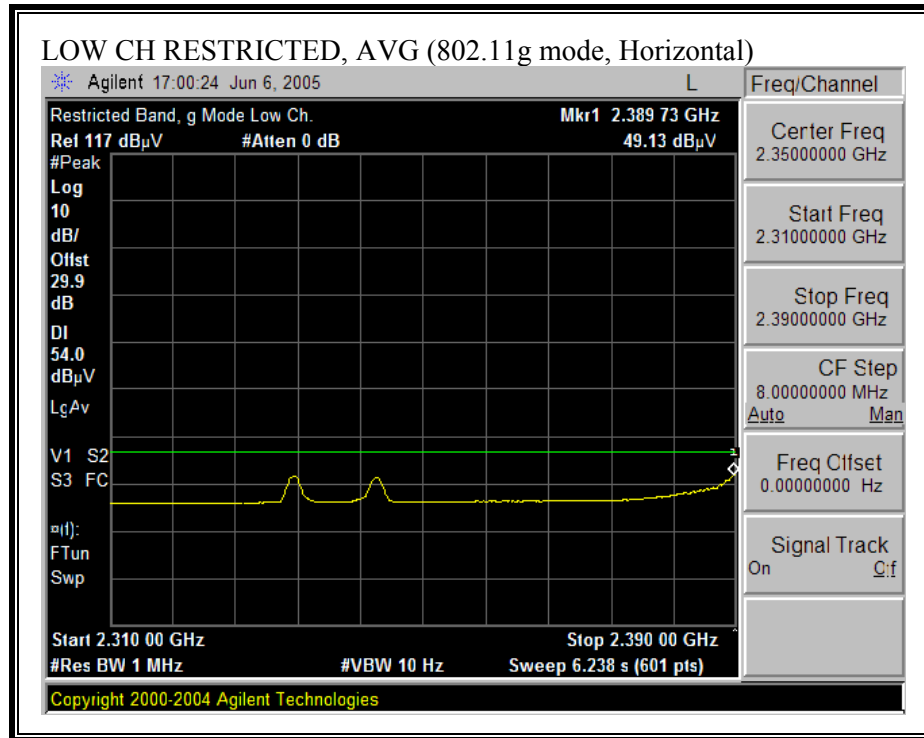


RESTRICTED BANDEDGE (g MODE, LOW CHANNEL, VERTICAL)

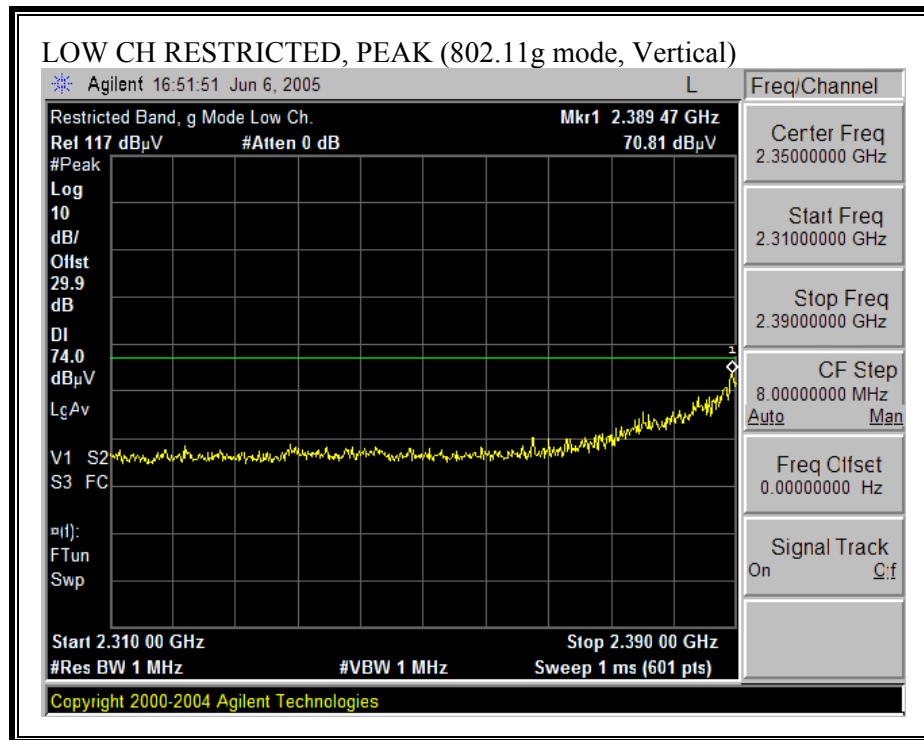


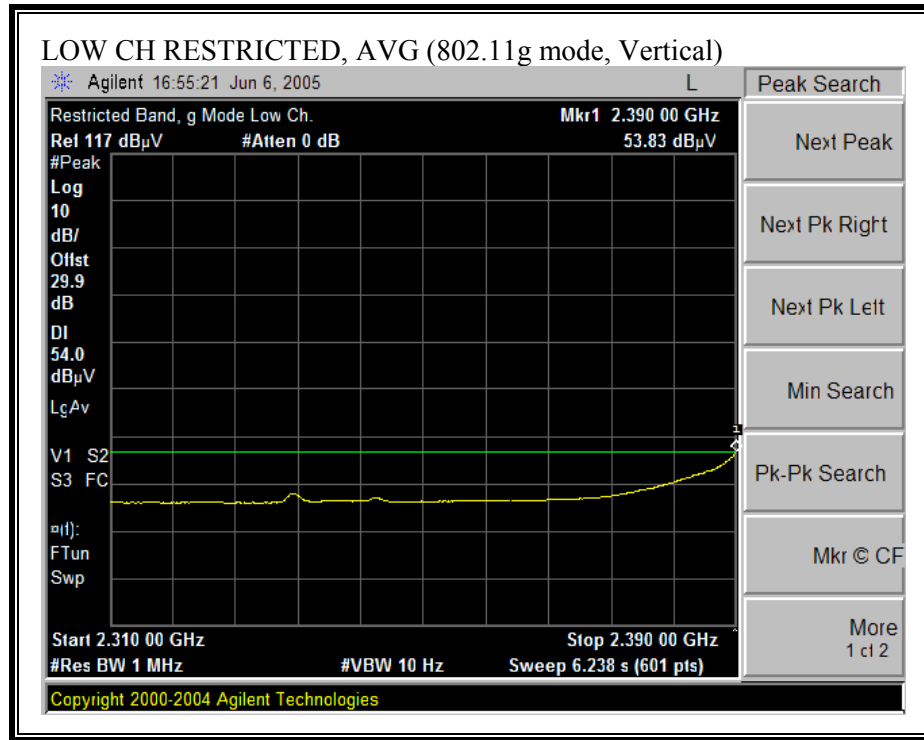


CH 10, 2457 MHz, TRANSMITTING POWER = 19 dBm


RESTRICTED BANDEDGE (g MODE, HIGH CHANNEL, HORIZONTAL)

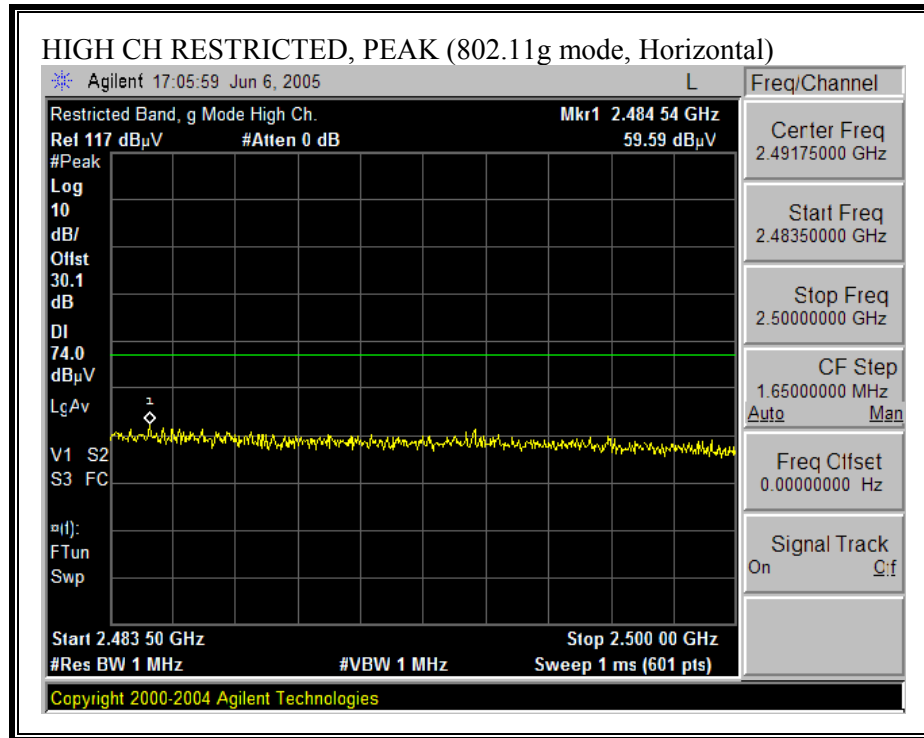

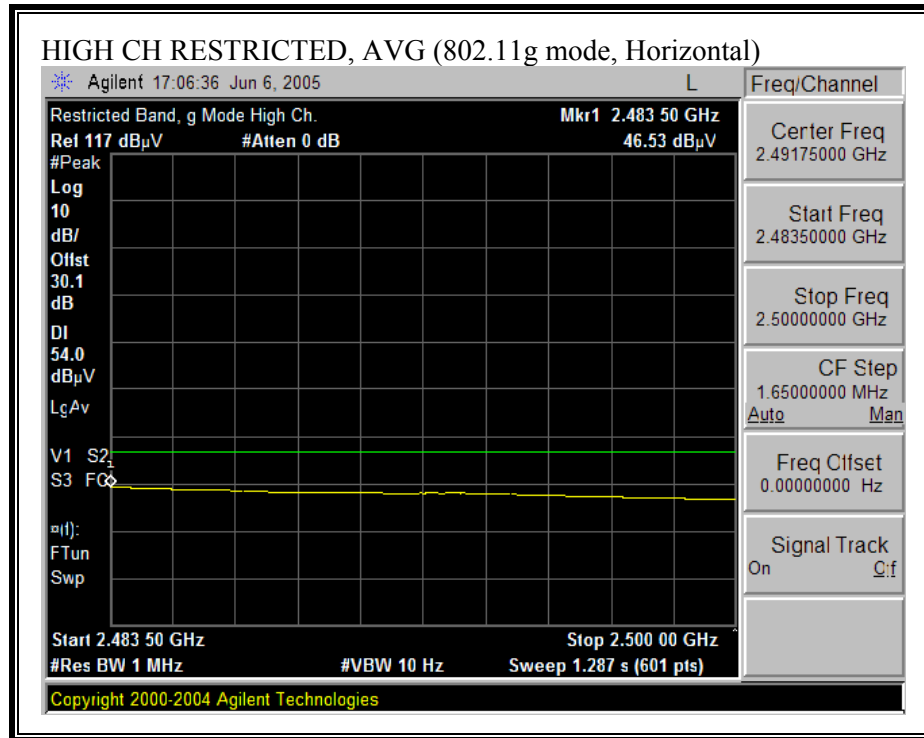


RESTRICTED BANDEDGE (g MODE, HIGH CHANNEL, VERTICAL)

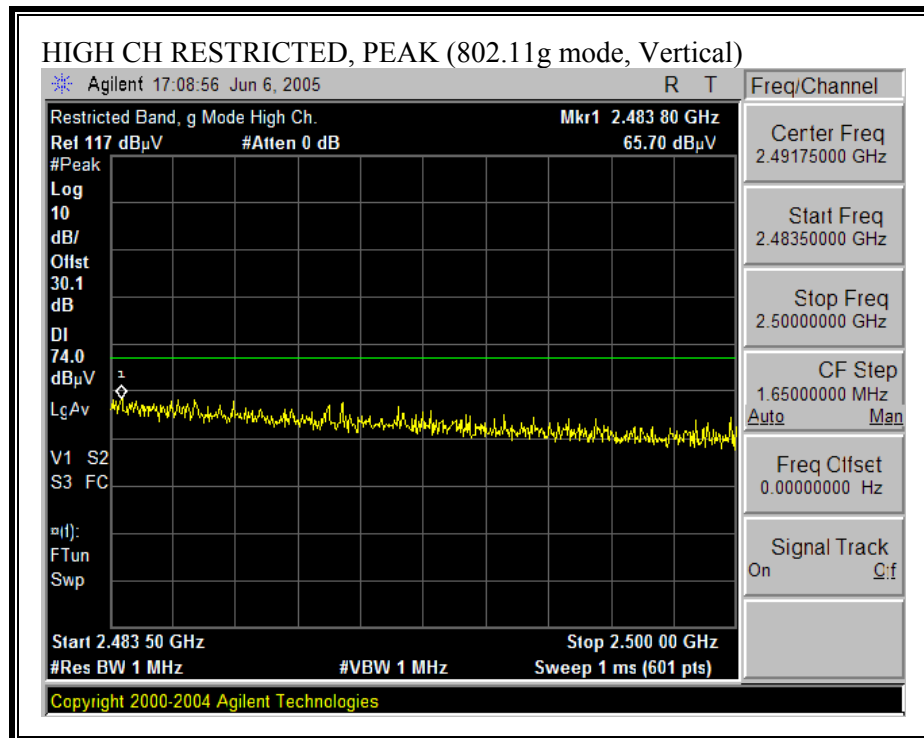


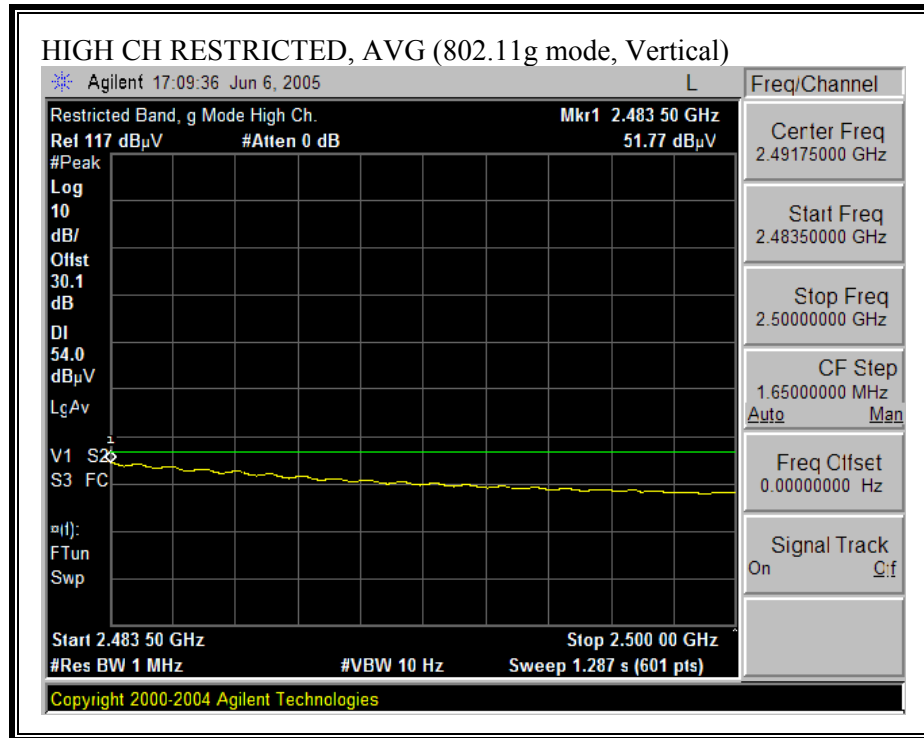


CH 11, 2462 MHz, TRANSMITTING POWER = 17 dBm


RESTRICTED BANDEDGE (g MODE, HIGH CHANNEL, HORIZONTAL)

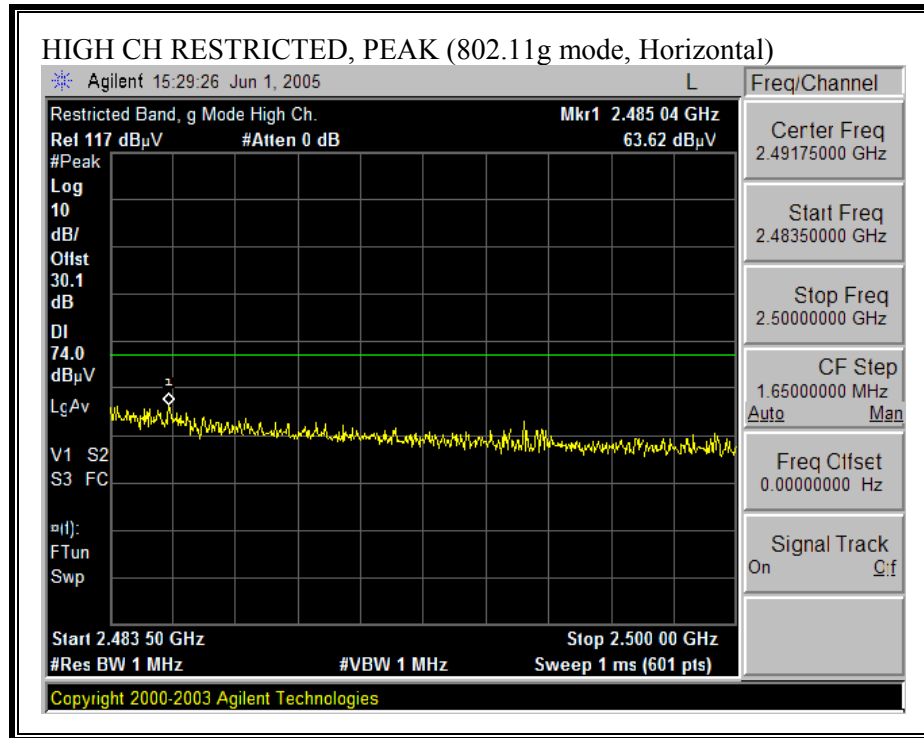

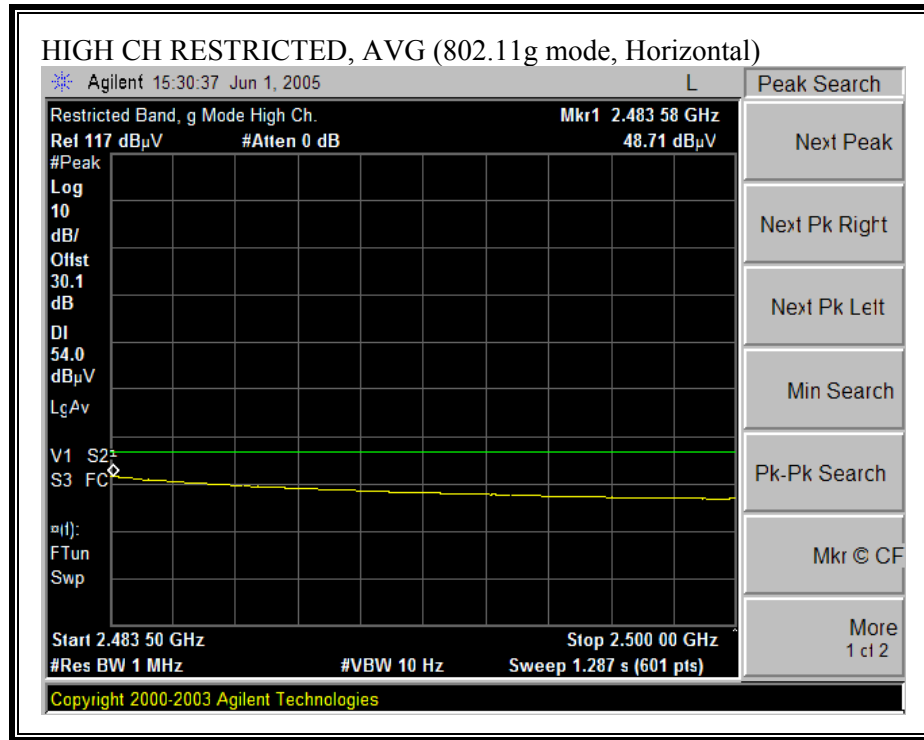


RESTRICTED BANDEDGE (g MODE, HIGH CHANNEL, VERTICAL)

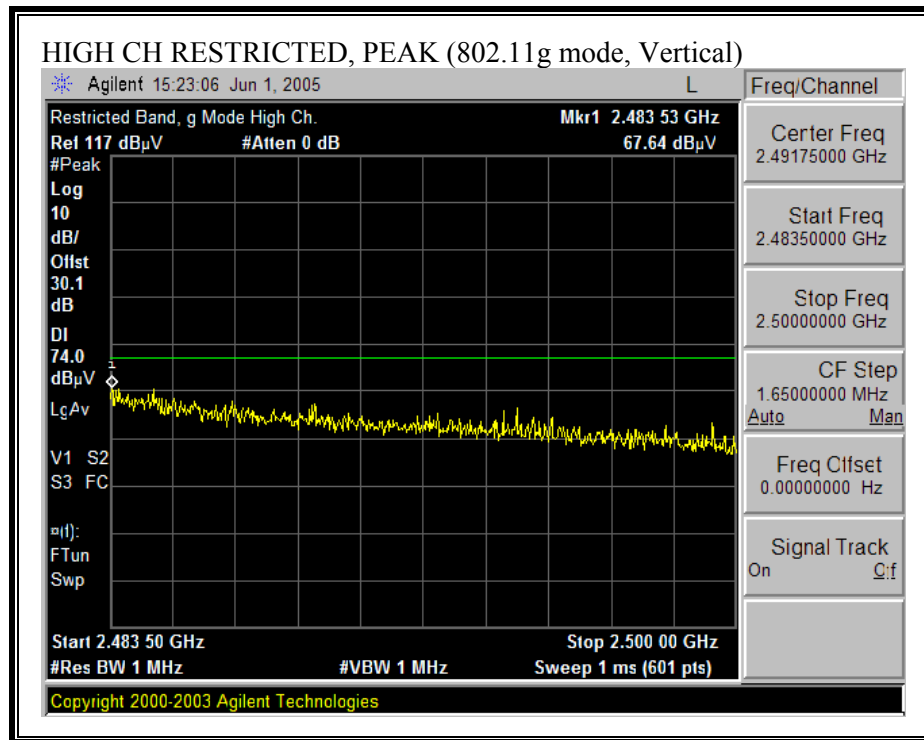


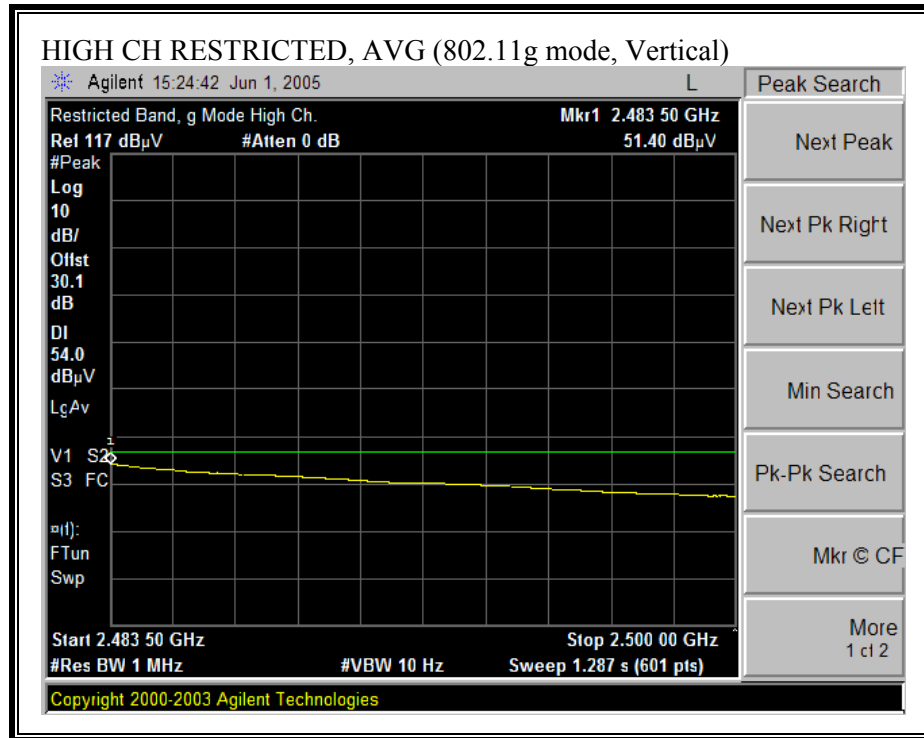


CH 13, 2472 MHz, TRANSMITTING POWER = 12 dBm


RESTRICTED BANDEDGE (g MODE, HIGH CHANNEL, HORIZONTAL)

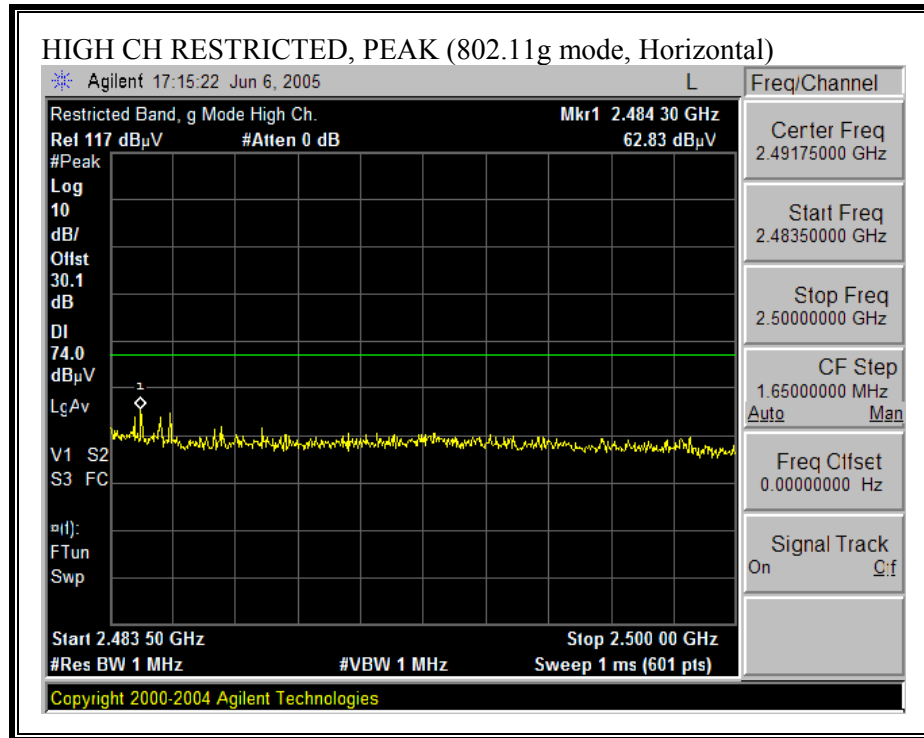

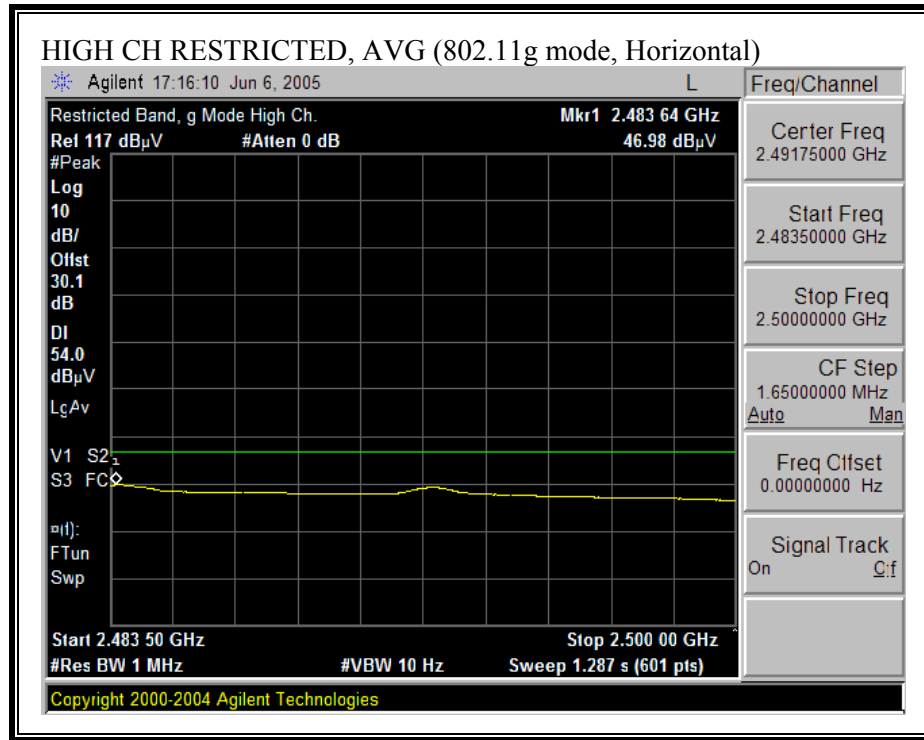

RESTRICTED BANDEDGE (g MODE, HIGH CHANNEL, VERTICAL)

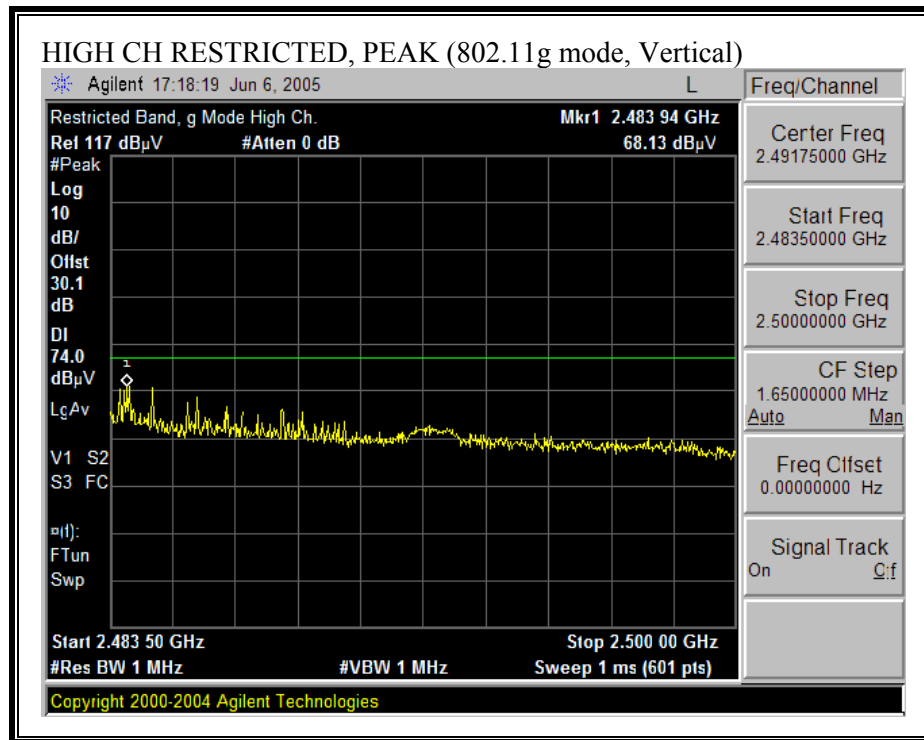

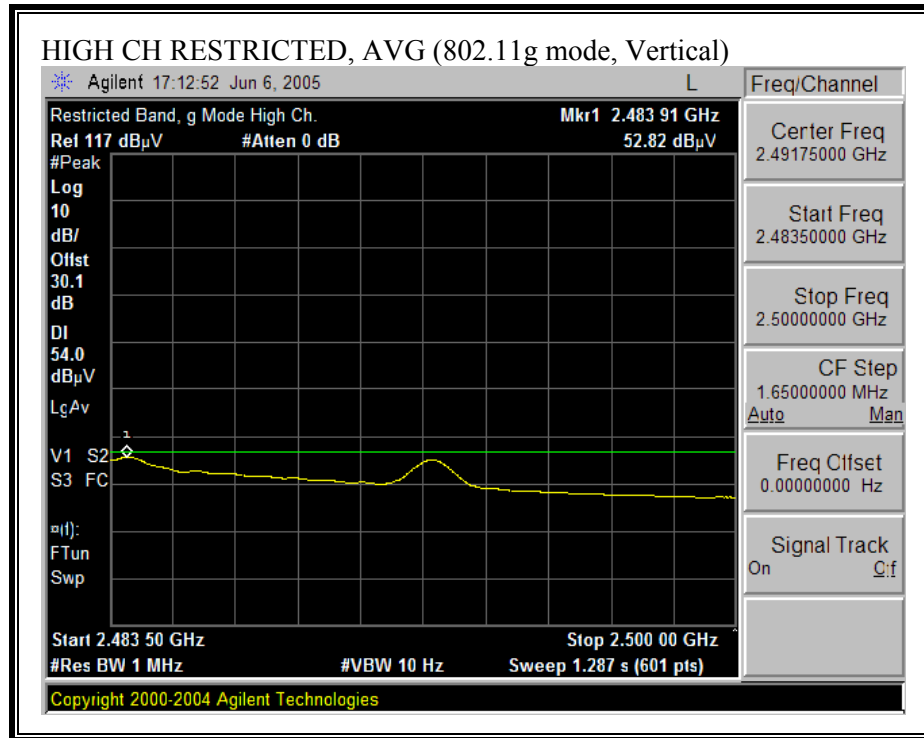

TRANSMITTER HARMONICS AND SPURIOUS EMISSIONS (q MODE) – Channel 1, 6 & 13

Power: Channel 1, 6, & 13 = 19dBm_Bit Rate: 54Mbps for Peak and 6Mbps for Average reading.

06/06/05 High Frequency Measurement															
Compliance Certification Services, Morgan Hill Open Field Site															
Test Engr: VIEN TRAN															
Project #: 05U3484															
Company: BROADCOM															
EUT Descrip.: 802.11g Mini PCI Express Card															
EUT M/N: BCM94311MCAG															
Test Target: FCC 15.247															
Mode Oper: 11g_TX LOW, MID, HI CHANNEL _ HARMONIC & SPUR															
Average Power Meter: = 19 dBm for Low, Mid, Hi channels															
Test Equipment:															
EMCO Horn 1-18GHz		Pre-amplifier 1-26GHz		Pre-amplifier 26-40GHz		Horn > 18GHz		Limit							
T73; S/N: 6717 @3m		T63 Miteq 646456						FCC 15.209							
Hi Frequency Cables 2 foot cable 3 foot cable 4 foot cable 12 foot cable 2_Vien 12_Vien HPF HPF_4.0GHz Reject Filter R_002															
Peak Measurements RBW=VBW=1MHz Average Measurements RBW=1MHz ; VBW=10Hz															
f GHz	Dist (m)	Read Pk dBuV	Read Avg. dBuV	AF dB/m	CL dB	Amp dB	D Corr dB	Fltr dB	Peak dBuV/m	Avg dBuV/m	Pk Lim dBuV/m	Avg Lim dBuV/m	Pk Mar dB	Avg Mar dB	Notes (V/H)
LOW CH=2412 MHz															
4.824	3.0	55.0	41.0	33.7	3.1	-37.9	0.0	0.6	54.5	40.5	74	54	-19.5	-13.5	H
7.236	3.0	55.8	42.4	35.4	3.7	-37.0	0.0	0.6	58.5	45.2	74	54	-15.5	-8.8	H
9.648	3.0	51.5	36.4	37.5	4.4	-36.2	0.0	0.8	58.0	42.9	74	54	-16.0	-11.1	H
12.060	3.0	44.0	34.1	38.5	5.6	-37.6	0.0	0.9	51.4	41.5	74	54	-22.6	-12.5	H, NOISE FLOOR
4.824	3.0	56.8	43.1	33.7	3.1	-37.9	0.0	0.6	56.3	42.6	74	54	-17.7	-11.4	V
7.236	3.0	55.0	41.8	35.4	3.7	-37.0	0.0	0.6	57.8	44.6	74	54	-16.2	-9.4	V
9.648	3.0	57.1	38.5	37.5	4.4	-36.2	0.0	0.8	63.6	45.0	74	54	-10.4	-9.0	V
12.060	3.0	44.8	34.5	38.5	5.6	-37.6	0.0	0.9	52.2	41.9	74	54	-21.8	-12.1	V, NOISE FLOOR
MID CH=2437MHz															
4.874	3.0	58.9	45.8	33.8	3.1	-37.9	0.0	0.6	58.5	45.4	74	54	-15.5	-8.6	H
7.311	3.0	56.2	43.3	35.5	3.7	-36.9	0.0	0.6	59.1	46.2	74	54	-14.9	-7.8	H
9.748	3.0	53.4	41.4	37.5	4.4	-36.1	0.0	0.8	60.0	48.0	74	54	-14.0	-6.0	H
12.185	3.0	44.4	34.6	38.5	5.6	-37.7	0.0	0.9	51.7	41.9	74	54	-22.3	-12.1	H, NOISE FLOOR
4.874	3.0	59.1	47.0	33.8	3.1	-37.9	0.0	0.6	58.7	46.6	74	54	-15.3	-7.4	V
7.311	3.0	57.8	46.0	35.5	3.7	-36.9	0.0	0.6	60.7	48.9	74	54	-13.3	-5.1	V
9.748	3.0	56.4	41.1	37.5	4.4	-36.1	0.0	0.8	63.0	47.7	74	54	-11.0	-6.3	V
12.185	3.0	45.8	34.3	38.5	5.6	-37.7	0.0	0.9	53.1	41.6	74	54	-20.9	-12.4	V, NOISE FLOOR
HI CH=2472MHz															
4.944	3.0	57.6	45.0	33.8	3.1	-37.9	0.0	0.6	57.3	44.7	74	54	-16.7	-9.3	H
7.416	3.0	56.4	44.4	35.6	3.8	-36.8	0.0	0.6	59.6	47.6	74	54	-14.4	-6.4	H
9.888	3.0	53.0	41.5	37.6	4.5	-36.1	0.0	0.8	59.9	48.4	74	54	-14.1	-5.6	H
12.360	3.0	48.0	35.7	38.5	5.6	-37.8	0.0	0.9	55.2	42.9	74	54	-18.8	-11.1	H, NOISE FLOOR
4.944	3.0	56.9	45.5	33.8	3.1	-37.9	0.0	0.6	56.6	45.2	74	54	-17.4	-8.8	V
7.416	3.0	59.7	47.2	35.6	3.8	-36.8	0.0	0.6	62.9	50.4	74	54	-11.1	-3.6	V
9.888	3.0	50.0	38.1	37.6	4.5	-36.1	0.0	0.8	56.9	45.0	74	54	-17.1	-9.0	V
12.360	3.0	48.5	37.0	38.5	5.6	-37.8	0.0	0.9	55.7	44.2	74	54	-18.3	-9.8	V, NOISE FLOOR
NO OTHER EMISSIONS WERE DETECTED AFTER 5TH HARMONIC															
f	Measurement Frequency		Amp	Preamp Gain		Avg Lim	Average Field Strength Limit								
Dist	Distance to Antenna		D Corr	Distance Correct to 3 meters		Pk Lim	Peak Field Strength Limit								
Read	Analyzer Reading		Avg	Average Field Strength @ 3 m		Avg Mar	Margin vs. Average Limit								
AF	Antenna Factor		Peak	Calculated Peak Field Strength		Pk Mar	Margin vs. Peak Limit								
CL	Cable Loss		HPF	High Pass Filter											


7.2.3. WORST-CASE RADIATED EMISSIONS BELOW 1 GHz

SPURIOUS EMISSIONS 30 TO 1000 MHz (WORST-CASE CONFIGURATION, HORIZONTAL)

Worst Case Channel

Condition: FCC CLASS-B HORIZONTAL
Test Operator: : chin Pang
Project #: : 05U3484-3
Company: : Broadcom
EUT: : 802.11b/g Mini PCI Express Card
Model No. : BCM94311MCG
Configuration : EUT/Laptop/Antennas/AC Adapter
Target of Test : FCC Class B
Mode of Operation: TX (worst Case)
:

	Freq	Read Level	Factor	Level	Limit Line	Over Limit	Remark
	MHz	dBuV	dB	dBuV/m	dBuV/m	dB	
1	133.790	25.24	15.02	40.26	43.50	-3.24	Peak
2	304.510	23.78	15.78	39.56	46.00	-6.44	Peak
3	342.340	25.38	16.68	42.06	46.00	-3.94	Peak
4	435.460	24.46	18.86	43.31	46.00	-2.69	Peak
5	487.840	21.25	20.00	41.25	46.00	-4.75	Peak
6	609.090	20.03	21.66	41.69	46.00	-4.31	Peak
7	638.190	18.70	22.15	40.85	46.00	-5.15	Peak

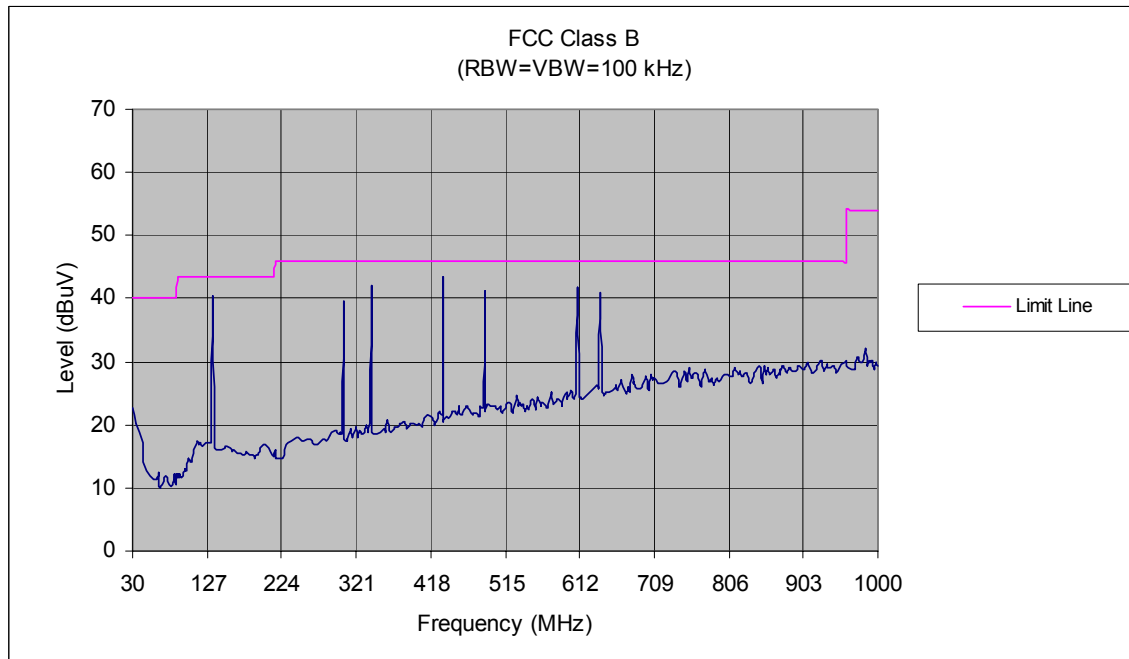

Condition: FCC CLASS-B VERTICAL

Test Operator: : chin Pang

Project #: : 05U3484-3

Company: : Broadcom

EUT: : 802.11b/g Mini PCI Express Card


Model No. : BCM94311MCG

Configuration : EUT/Laptop/Antennas/AC Adapter

Target of Test : FCC Class B

Mode of Operation: TX (worst Case)

	Freq	Read Level	Factor	Level	Limit Line	Over Limit	Remark
	MHz	dBuV	dB	dBuV/m	dBuV/m	dB	
1	101.780	26.60	11.77	38.37	43.50	-5.13	Peak
2	304.510	26.00	15.78	41.78	46.00	-4.22	Peak
3	340.400	24.56	16.64	41.21	46.00	-4.79	Peak
4	407.330	24.90	18.21	43.11	46.00	-2.89	Peak
5	465.530	21.62	19.51	41.13	46.00	-4.87	Peak
6	606.180	17.81	21.63	39.44	46.00	-6.56	Peak
7	783.690	18.84	24.34	43.18	46.00	-2.82	Peak

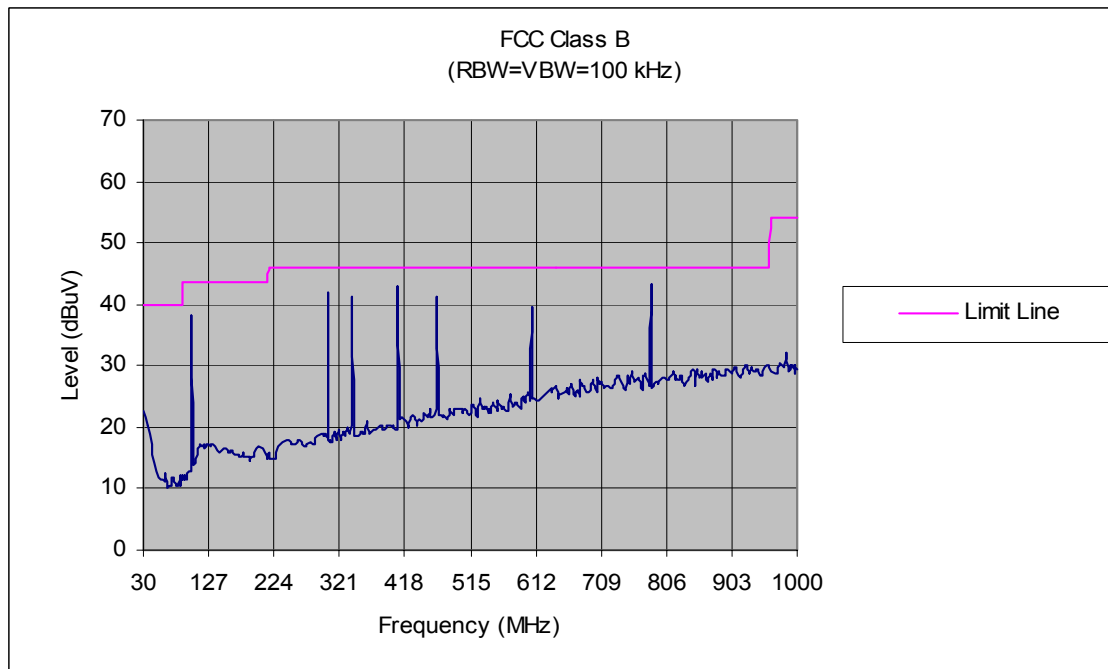

7.3. POWERLINE CONDUCTED EMISSIONS

LIMIT

§15.207 (a) Except as shown in paragraphs (b) and (c) of this section, for an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table, as measured using a 50 μ H/50 ohms line impedance stabilization network (LISN). Compliance with the provisions of this paragraph shall be based on the measurement of the radio frequency voltage between each power line and ground at the power terminal.

The lower limit applies at the boundary between the frequency ranges.

Frequency of Emission (MHz)	Conducted Limit (dBuV)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

* Decreases with the logarithm of the frequency.

TEST PROCEDURE

The EUT is placed on a non-conducting table 40 cm from the vertical ground plane and 80 cm above the horizontal ground plane. The EUT is configured in accordance with ANSI C63.4.

The resolution bandwidth is set to 9 kHz for both peak detection and quasi-peak detection measurements. Peak detection is used unless otherwise noted as quasi-peak.

Line conducted data is recorded for both NEUTRAL and HOT lines.


RESULTS

No non-compliance noted:


6 WORST EMISSIONS

CONDUCTED EMISSIONS DATA (115VAC 60Hz)									
Freq.	Reading			Closs	Limit	FCC_B	Margin		Remark
(MHz)	PK (dBuV)	QP (dBuV)	AV (dBuV)	(dB)	QP	AV	QP (dB)	AV (dB)	L1 / L2
0.21	43.99	--	33.19	0.00	63.21	53.21	-19.22	-20.02	L1
0.45	33.22	--	15.13	0.00	56.88	46.88	-23.66	-31.75	L1
12.38	32.00	--	23.67	0.00	60.00	50.00	-28.00	-26.33	L1
21.00	46.19	--	35.32	0.00	60.00	50.00	-13.81	-14.68	L2
0.65	34.48	--	24.43	0.00	56.00	46.00	-21.52	-21.57	L2
12.38	30.32	--	19.23	0.00	60.00	50.00	-29.68	-30.77	L2
6 Worst Data									

LINE 1 RESULTS

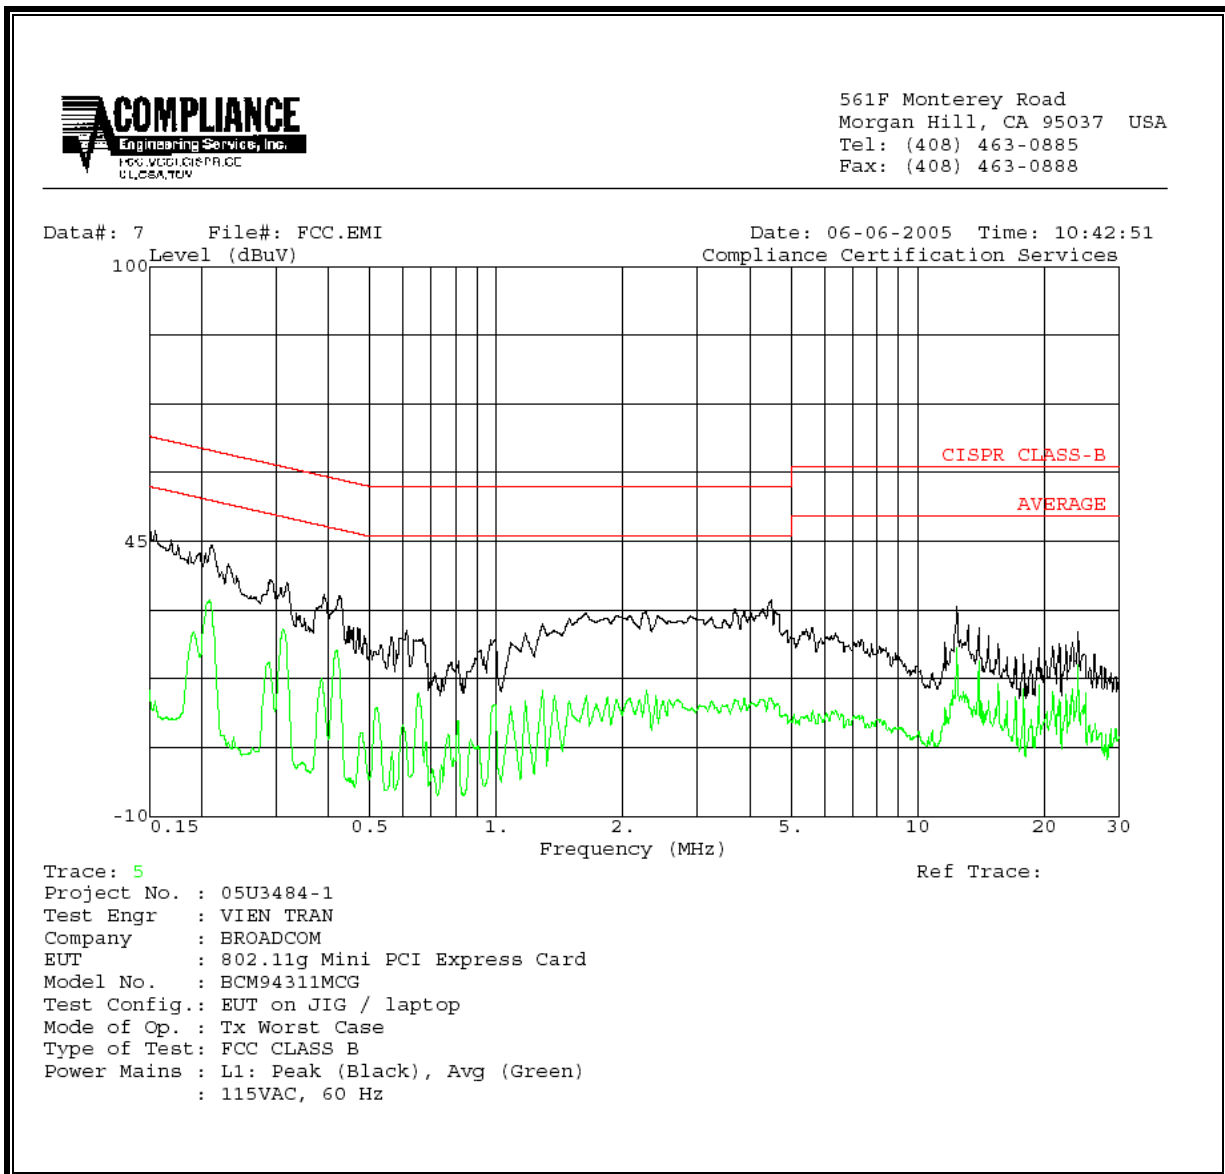


LINE 2 RESULTS

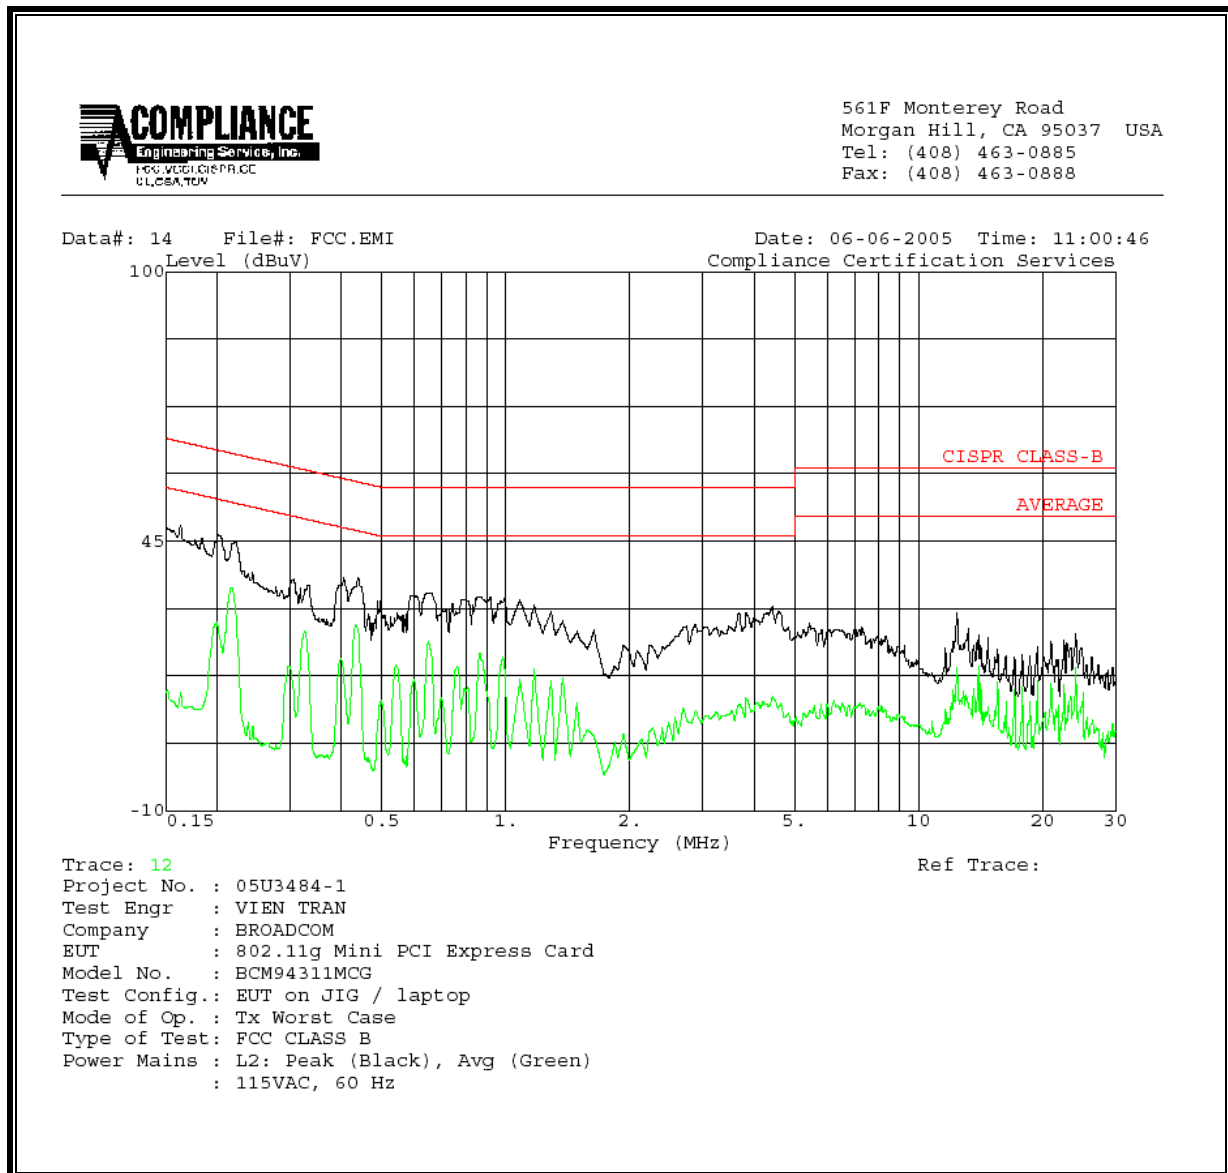

8. SETUP PHOTOS


RF CONDUCTED SETUP

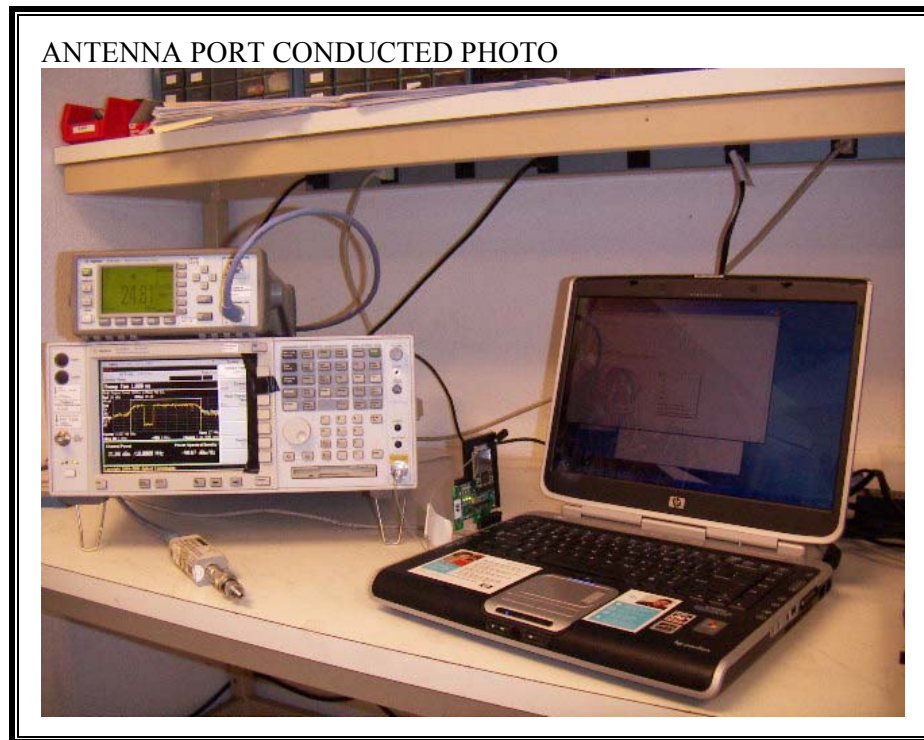

RADIATED RF MEASUREMENT SETUP




RADIATED BACK PHOTO – FOR ABOVE 1GHZ TEST

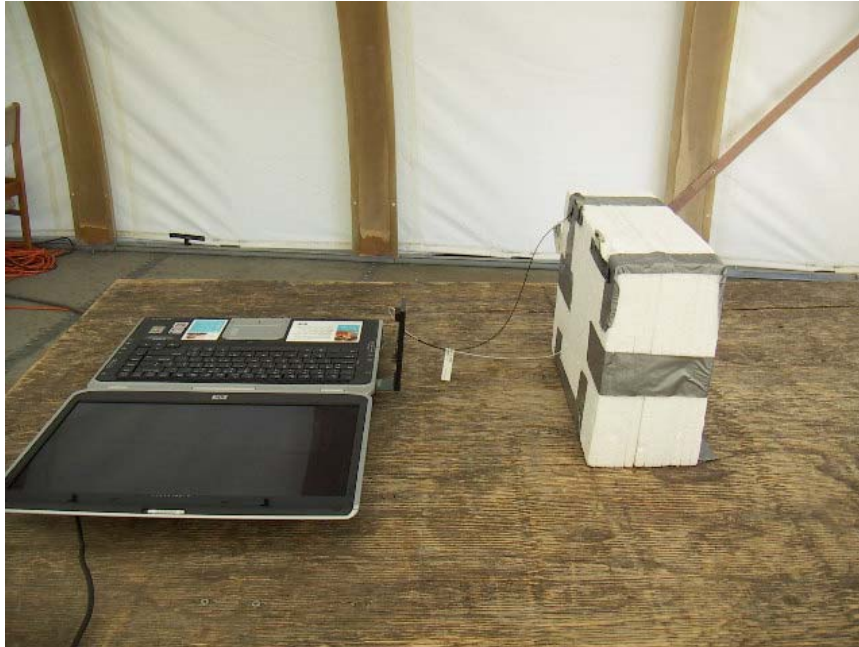


RADIATED SIDE PHOTO – FOR ABOVE 1GHZ TEST



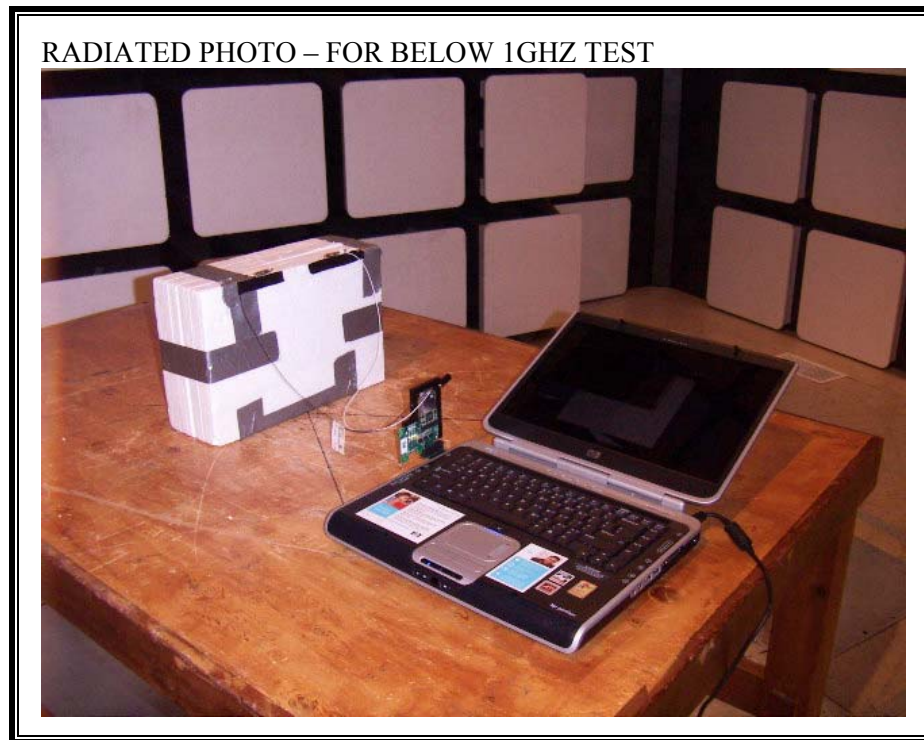

POWERLINE CONDUCTED EMISSIONS MEASUREMENT SETUP

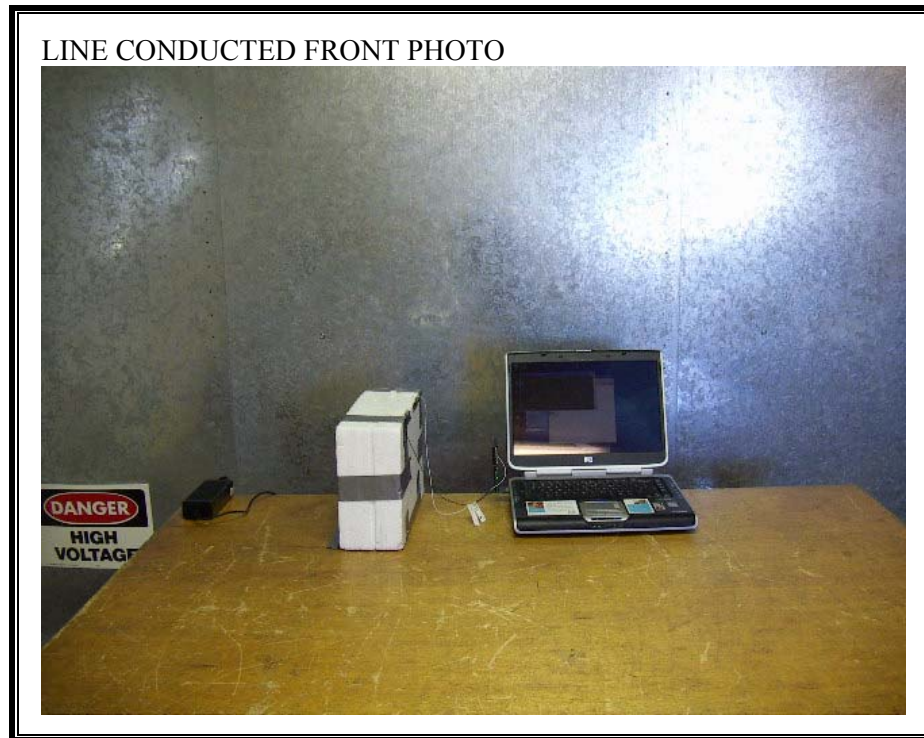

LINE CONDUCTED BACK PHOTO



END OF REPORT