

System Check_Body_2450MHz_121010**DUT: D2450V2-SN:736**

Communication System: CW; Frequency: 2450 MHz; Duty Cycle: 1:1

Medium: MSL_2450_121010 Medium parameters used: $f = 2450$ MHz; $\sigma = 1.973$ mho/m; $\epsilon_r = 54.161$; ρ $= 1000$ kg/m³

Ambient Temperature : 22.5 °C; Liquid Temperature : 21.5 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3578; ConvF(6.43, 6.43, 6.43); Calibrated: 2012/6/21;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn778; Calibrated: 2012/8/27
- Phantom: ELI 4.0_Front; Type: QDOVA001BB; Serial: 1026
- Measurement SW: DASY52, Version 52.8 (2); SEMCAD X Version 14.6.6 (6477)

Pin=250mW/Area Scan (91x91x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 14.2 mW/g



Pin=250mW/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 83.715 V/m; Power Drift = 0.03 dB

Peak SAR (extrapolated) = 25.996 mW/g

SAR(1 g) = 12.1 mW/g; SAR(10 g) = 5.53 mW/g

Maximum value of SAR (measured) = 13.9 mW/g

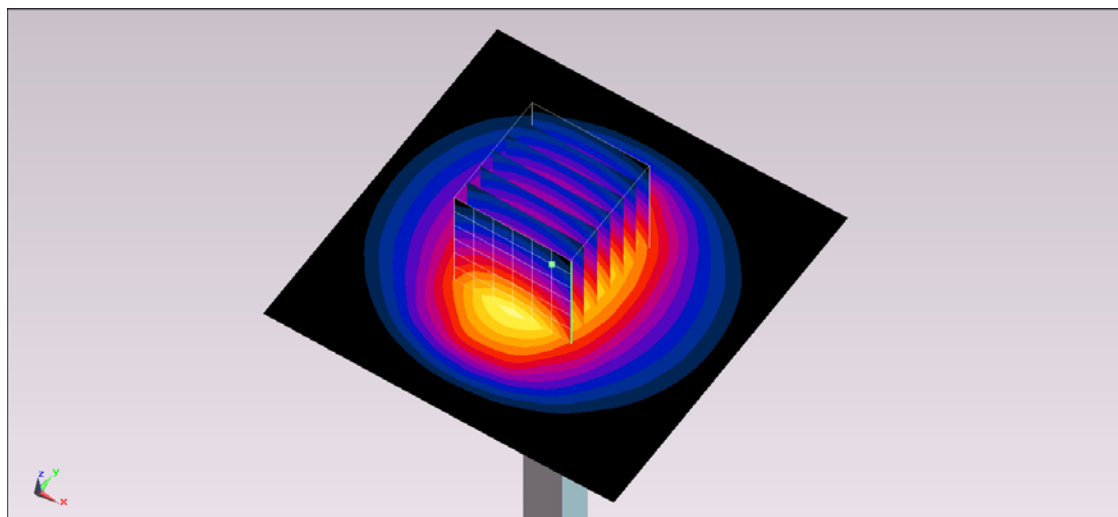

0 dB = 13.9 mW/g = 22.86 dB mW/g

System Check_Body_5200MHz_120516**DUT: D5GHzV2-SN:1006**

Communication System: CW; Frequency: 5200 MHz; Duty Cycle: 1:1

Medium: MSL_5G_120516 Medium parameters used: $f = 5200$ MHz; $\sigma = 5.162$ mho/m; $\epsilon_r = 48.492$;

$\rho = 1000$ kg/m³

Ambient Temperature : 22.6 °C ; Liquid Temperature : 21.6 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3819; ConvF(4.48, 4.48, 4.48); Calibrated: 2011/11/16;
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn778; Calibrated: 2011/11/22
- Phantom: ELI v5.0; Type: QDOVA002AA; Serial: TP1127
- Measurement SW: DASY52, Version 52.8 (1); SEMCAD X Version 14.6.5 (6469)

Pin=250mW/Area Scan (91x91x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 28.5 mW/g


Pin=250mW/Zoom Scan (8x8x8)/Cube 0: Measurement grid: dx=4.3mm, dy=4.3mm, dz=3mm

Reference Value = 0.588 V/m; Power Drift = 0.12 dB

Peak SAR (extrapolated) = 41.004 mW/g

SAR(1 g) = 16.8 mW/g; SAR(10 g) = 5.66 mW/g

Maximum value of SAR (measured) = 25.4 mW/g

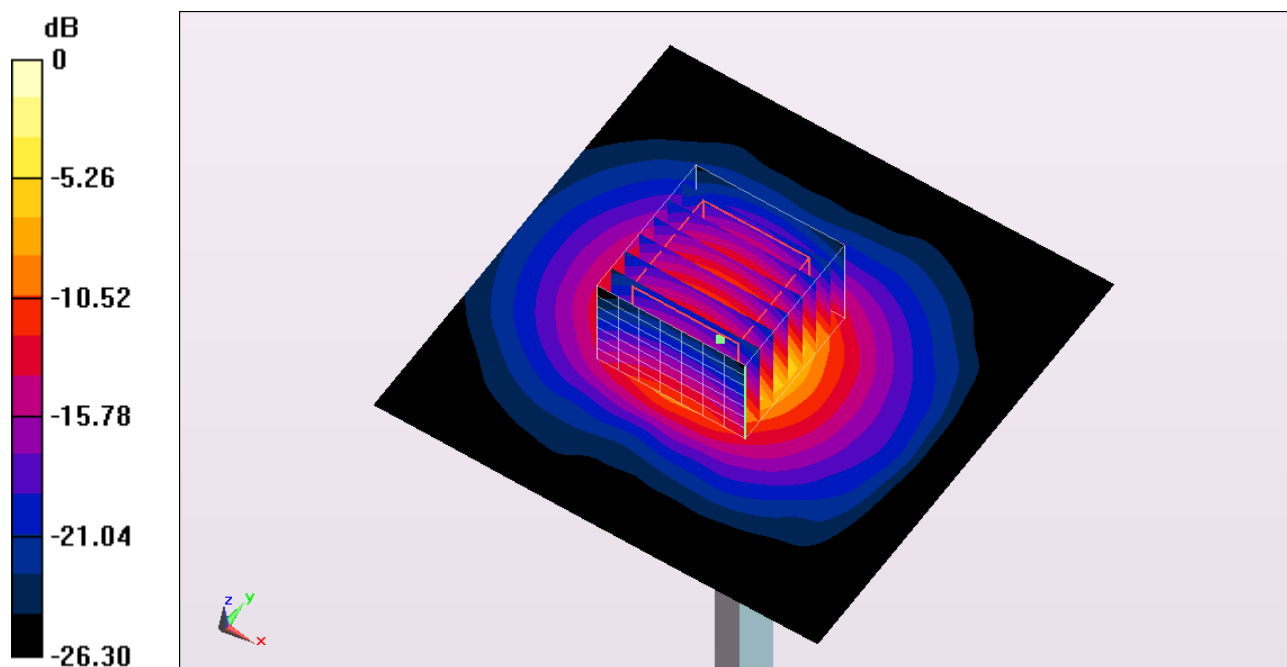

0 dB = 25.4 mW/g = 28.10 dB mW/g

System Check_Body_5500MHz_120516**DUT: D5GHzV2-SN:1006**

Communication System: CW; Frequency: 5500 MHz; Duty Cycle: 1:1

Medium: MSL_5G_120516 Medium parameters used: $f = 5500$ MHz; $\sigma = 5.587$ mho/m; $\epsilon_r = 47.93$; $\rho = 1000$ kg/m³

Ambient Temperature : 22.6 °C; Liquid Temperature : 21.6 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3819; ConvF(3.9, 3.9, 3.9); Calibrated: 2011/11/16;
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn778; Calibrated: 2011/11/22
- Phantom: ELI v5.0; Type: QDOVA002AA; Serial: TP1127
- Measurement SW: DASY52, Version 52.8 (1); SEMCAD X Version 14.6.5 (6469)

Pin=250mW/Area Scan (91x91x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 31.1 mW/g


Pin=250mW/Zoom Scan (8x8x8)/Cube 0: Measurement grid: dx=4.3mm, dy=4.3mm, dz=3mm

Reference Value = 73.967 V/m; Power Drift = 0.08 dB

Peak SAR (extrapolated) = 45.775 mW/g

SAR(1 g) = 18.9 mW/g; SAR(10 g) = 6.21 mW/g

Maximum value of SAR (measured) = 29.0 mW/g

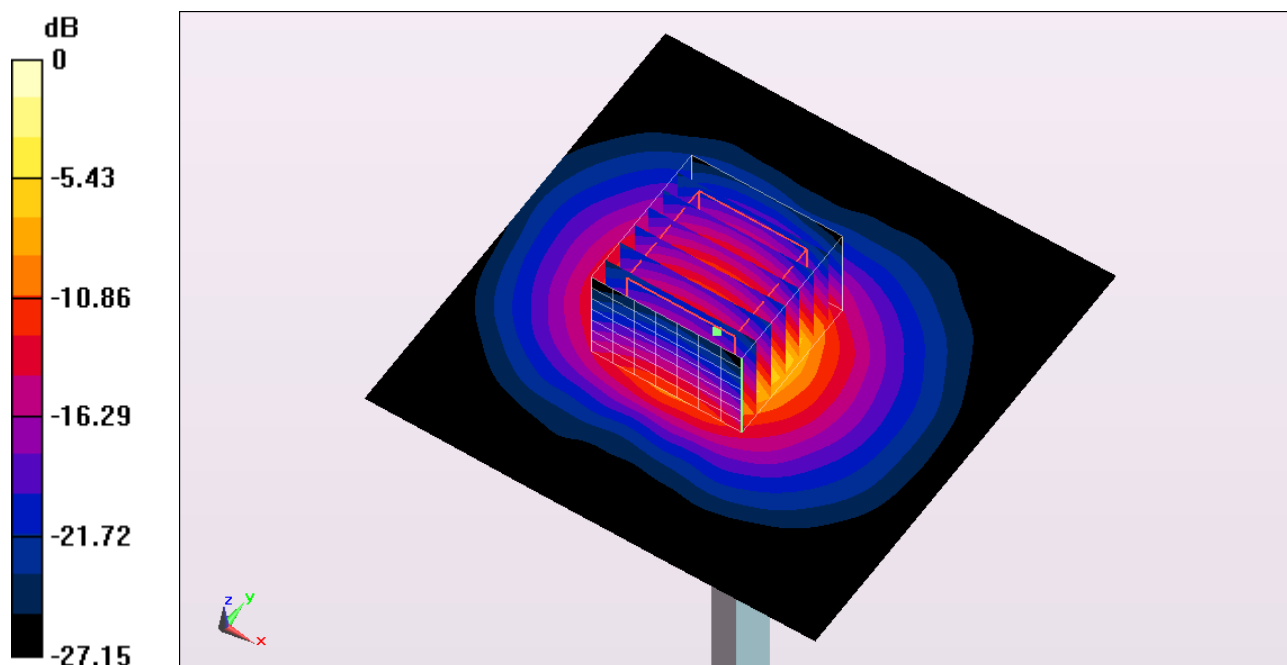

0 dB = 29.0 mW/g = 29.25 dB mW/g

System Check_Body_5500MHz_121010**DUT: Dipole 5GHz**

Communication System: CW; Frequency: 5500 MHz; Duty Cycle: 1:1

Medium: MSL_5G_121010 Medium parameters used: $f = 5500$ MHz; $\sigma = 5.717$ mho/m; $\epsilon_r = 47.955$; $\rho = 1000$ kg/m³

Ambient Temperature : 22.9 °C; Liquid Temperature : 21.9 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3578; ConvF(3.45, 3.45, 3.45); Calibrated: 2012/6/21;
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn778; Calibrated: 2012/8/27
- Phantom: ELI 4.0_Front; Type: QDOVA001BB; Serial: 1026
- Measurement SW: DASY52, Version 52.8 (2); SEMCAD X Version 14.6.6 (6477)

Pin=250mW/Area Scan (91x91x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 32.7 mW/g



Pin=250mW/Zoom Scan (8x8x8)/Cube 0: Measurement grid: dx=4.3mm, dy=4.3mm, dz=3mm

Reference Value = 74.817 V/m; Power Drift = 0.14 dB

Peak SAR (extrapolated) = 48.238 mW/g

SAR(1 g) = 20.1 mW/g; SAR(10 g) = 6.76 mW/g

Maximum value of SAR (measured) = 29.9 mW/g

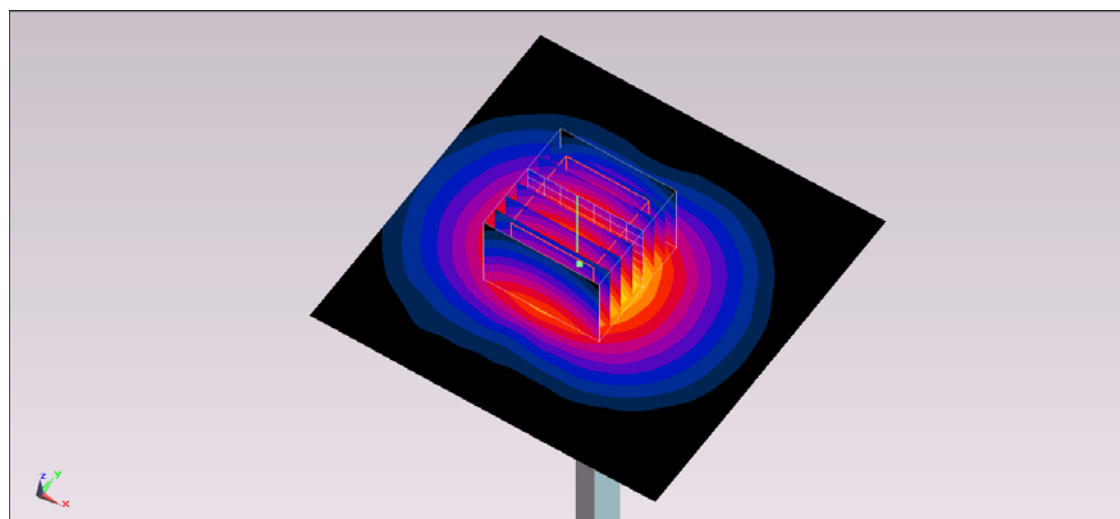

0 dB = 29.9 mW/g = 29.51 dB mW/g

System Check_Body_5800MHz_121010**DUT: D5GHzV2-SN:1006**

Communication System: CW; Frequency: 5800 MHz; Duty Cycle: 1:1

Medium: MSL_5G_121010 Medium parameters used: $f = 5800$ MHz; $\sigma = 6.113$ mho/m; $\epsilon_r = 47.156$; $\rho = 1000$ kg/m³

Ambient Temperature : 22.5 °C; Liquid Temperature : 21.5 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3578; ConvF(3.43, 3.43, 3.43); Calibrated: 2012/6/21;
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn778; Calibrated: 2012/8/27
- Phantom: ELI 4.0_Front; Type: QDOVA001BB; Serial: 1026
- Measurement SW: DASY52, Version 52.8 (2); SEMCAD X Version 14.6.6 (6477)

Pin=250mW/Area Scan (91x91x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 28.8 mW/g



Pin=250mW/Zoom Scan (8x8x8)/Cube 0: Measurement grid: dx=4.3mm, dy=4.3mm, dz=3mm

Reference Value = 66.962 V/m; Power Drift = 0.17 dB

Peak SAR (extrapolated) = 42.701 mW/g

SAR(1 g) = 17.2 mW/g; SAR(10 g) = 5.56 mW/g

Maximum value of SAR (measured) = 27.0 mW/g

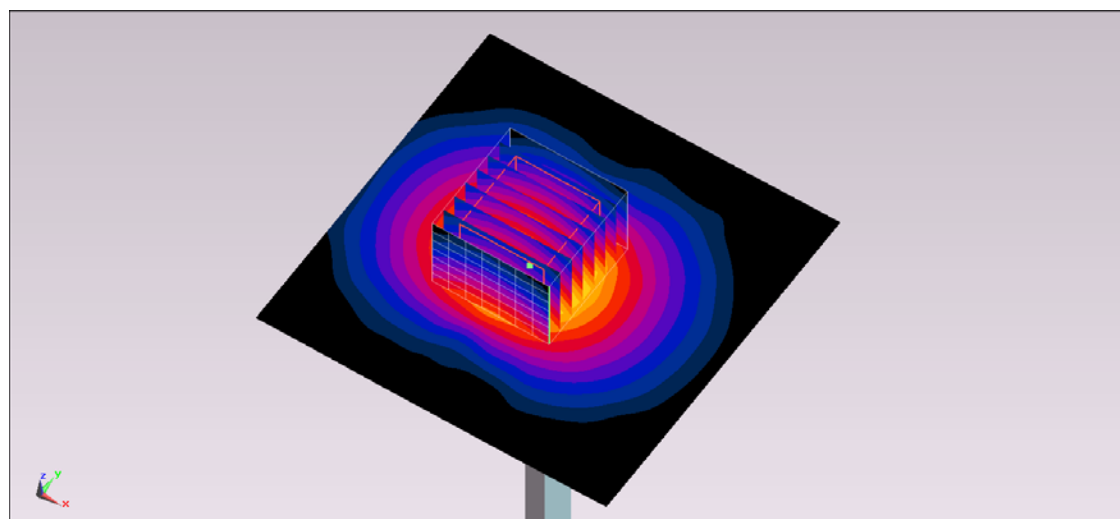

0 dB = 27.0 mW/g = 28.63 dB mW/g