FCC Test Report

Report No.: AGC02224151201FE03

FCC ID	:	QEA-20238-27T
APPLICATION PURPOSE	:	Original Equipment
PRODUCT DESIGNATION	:	Radio control
BRAND NAME	:	N/A
MODEL NAME	:	LM208538, 20238, 20239, LM208537
CLIENT	:	Kid Galaxy Inc.
DATE OF ISSUE	:	Dec.15, 2015
STANDARD(S) **TEST PROCEDURE(S)**	:	FCC Part 15 Rules
REPORT VERSION	:	V1.0

Attestation of Global Compliance (Shenzhen) Co., Ltd

CAUTION:
This report shall not be reproduced except in full without the written permission of the test laboratory and shall not be quoted out of context.

Report Revise Record

Report Version	Revise Time	Issued Date	Valid Version	Notes
V1.0	/	Dec.15, 2015	Valid	Original Report

TABLE OF CONTENTS

1. VERIFICATION OF CONFORMITY **4**
2. GENERAL INFORMATION **5**
3. MEASUREMENT UNCERTAINTY **6**
4. DESCRIPTION OF TEST MODES **6**
5. SYSTEM TEST CONFIGURATION **7**
5.1. CONFIGURATION OF EUT SYSTEM 7
5.2. EQUIPMENT USED IN EUT SYSTEM 7
5.3. SUMMARY OF TEST RESULTS 7
6. TEST FACILITY **8**
7. RADIATED EMISSION **9**
7.1TEST LIMIT 9
7.2. MEASUREMENT PROCEDURE 10
7.3. TEST SETUP 12
7.4. TEST RESULT 13
8. 20DB BANDWIDTH **16**
8.1. MEASUREMENT PROCEDURE 16
8.2. TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION) 16
8.3. MEASUREMENT RESULTS 17
APPENDIX A: PHOTOGRAPHS OF TEST SETUP **18**
APPENDIX B: PHOTOGRAPHS OF EUT **19**

1. VERIFICATION OF CONFORMITY

Applicant	Kid Galaxy Inc.
Address	150 Dow Street, Tower 2, Unit 425B, Manchester, New Hampshire, 03101, United States
Manufacturer	HK TAIHUI INDUSTRIAL CO.,LIMITED
Address	2LAYER FOUR ZONE, GUANGHUA INDUSTRIAL, CHENGHAI, SHANGTOU, GUANGDONG, CHINA
Product Designation	Radio control
Brand Name	N/A
Test Model	LM208538
Series Model	20238, 20239, LM208537
Model Difference	All the same except for the model name and color.
Date of test	Dec.08, 2015 to Dec.10, 2015
Deviation	None
Condition of Test Sample	Normal
Report Template	AGCRT-US-BR/RF

We hereby certify that:

The above equipment was tested by Dongguan Precise Testing Service Co., Ltd. The test data, data evaluation, test procedures, and equipment configurations shown in this report were made in accordance with the procedures given in ANSI C63.4 (2009) and the energy emitted by the sample EUT tested as described in this report is in compliance with radiated emission limits of FCC Rules Part 15.229.

Tested by	Max Zhang(Zhang Yi)	Dec.15, 2015
Reviewed by	Rock Huang(Huang Dinglue)	Dec.15, 2015
Approved by	Solger Zhang(Zhang Hongyi) Authorized Officer	Dec.15, 2015

2. GENERAL INFORMATION

A major technical description of EUT is described as following

Operation Frequency	27.145MHz
Maximum field strength	59.4 dBμV/m@3m(AV)
Modulation	ASK
Number of channels	1
Antenna Gain	2dBi
Antenna Designation	Fixed Antenna (Met 15.203 Antenna requirement)
Hardware Version	RC-907T
Software Version	N/A
Power Supply	DC 3V by battery

3. MEASUREMENT UNCERTAINTY

The reported uncertainty of measurement y ±U，where expended uncertainty U is based on a standard uncertainty multiplied by a coverage factor of k=2，providing a level of confidence of approximately 95 %。

No.	Item	Uncertainty
1	Conducted Emission Test	±3.18dB
2	All emissions,radiated	±3.91dB
3	Temperature	±0.5°C
4	Humidity	±2%

4. DESCRIPTION OF TEST MODES

NO.	TEST MODE DESCRIPTION
1	TX ON
4	TX OFF

Note:
1. All the test modes can be supply by battery, only the result of the worst case was recorded in the report, if no other cases.
2. For Radiated Emission, 3axis were chosen for testing for each applicable mode.

5. SYSTEM TEST CONFIGURATION

5.1. CONFIGURATION OF EUT SYSTEM

Configure :



5.2. EQUIPMENT USED IN EUT SYSTEM

Item	Equipment	Model No.	ID or Specification	Remark
1	Radio control	N/A	LM208538	EUT

5.3. SUMMARY OF TEST RESULTS

FCC RULES	DESCRIPTION OF TEST	RESULT
§15.229	Radiated Emission	Compliant
§15.215	20dB bandwidth	Compliant

6. TEST FACILITY

Site	Dongguan Precise Testing Service Co., Ltd.
Location	Building D, Baoding Technology Park,Guangming Road2, Dongcheng District, Dongguan, Guangdong, China.
FCC Registration No.	371540
Description	The test site is constructed and calibrated to meet the FCC requirements in documents ANSI C63.4:2009.

ALL TEST EQUIPMENT LIST

Radiated Emission Test Site					
Name of Equipment	**Manufacturer**	**Model Number**	**Serial Number**	**Last Calibration**	**Due Calibration**
EMI Test Receiver	Rohde & Schwarz	ESCI	101417	July 4, 2015	July 3, 2016
Trilog Broadband Antenna (25M-1GHz)	SCHWARZBECK	VULB9160	9160-3355	July 4, 2015	July 3, 2016
Signal Amplifier	SCHWARZBECK	BBV 9475	9745-0013	July 4, 2015	July 3, 2016
RF Cable	SCHWARZBECK	AK9515E	96221	July 4, 2015	July 3, 2016
3m Anechoic Chamber	CHENGYU	966	PTS-001	June 6, 2015	June 5, 2016
MULTI-DEVICE Positioning Controller	Max-Full	MF-7802	MF780208339	N/A	N/A
Active loop antenna (9K-30MHz)	Schwarzbeck	FMZB1519	1519-038	June 6, 2015	June 5, 2016
Spectrum analyzer	Agilent	E4407B	MY46185649	June 6, 2015	June 5, 2016
Horn Antenna (1G-18GHz)	SCHWARZBECK	BBHA9120D	9120D-1246	June 6, 2015	June 5, 2016
Horn Ant (18G-40GHz)	Schwarzbeck	BBHA 9170	9170-181	June 6, 2015	June 5, 2016

7. RADIATED EMISSION

7.1TEST LIMIT

Standard FCC15.229

Fundamental Frequency	Field Strength of Fundamental (micro volts/meter) AV Detector	Field Strength of Fundamental (micro volts/meter) PK Detector
26.96-27.28MHz	10000(80 dBμV/m)	100000(100 dBμV/m)

Standard FCC 15.209

Frequency (MHz)	Distance Meters	Field Strengths Limit	
		μ V/m	dB(μV)/m
0.009 ~ 0.490	300	2400/F(kHz)	---
0.490 ~ 1.705	30	24000/F(kHz)	---
1.705 ~ 30	30	30	---
30 ~ 88	3	100	40.0
88 ~ 216	3	150	43.5
216 ~ 960	3	200	46.0
960 ~ 1000	3	500	54.0
Above 1000	3	Other:74.0 dB(μV)/m (Peak) 54.0 dB(μV)/m (Average)	

Remark: (1) Emission level dB μ V = 20 log Emission level μ V/m

(2) The smaller limit shall apply at the cross point between two frequency bands.

(3) Distance is the distance in meters between the measuring instrument, antenna and the closest point of any part of the device or system.

7.2. MEASUREMENT PROCEDURE

1. Configure the EUT according to ANSI C63.4. The EUT was placed on the top of the turntable 0.8 meter above ground. The phase center of the receiving antenna mounted on the top of a height-variable antenna tower was placed 3 meters far away from the turntable.
2. Power on the EUT and all the supporting units. The turntable was rotated by 360 degrees to determine the position of the highest radiation.
3. The height of the broadband receiving antenna was varied between one meter and four meters above ground to find the maximum emissions field strength of both horizontal and vertical polarization.
4. For each suspected emissions, the antenna tower was scan (from 1 M to 4 M) and then the turntable was rotated (from 0 degree to 360 degrees) to find the maximum reading.
5. Set the test-receiver system to Peak or CISPR quasi-peak Detect Function with specified bandwidth under Maximum Hold Mode.
6. For emissions above 1GHz, use 1MHz VBW and RBW for peak reading. Then 1MHz RBW and 10Hz VBW for average reading in spectrum analyzer.
7. When the radiated emissions limits are expressed in terms of the average value of the emissions, and pulsed operation is employed, the measurement field strength shall be determined by averaging over one complete pulse train, including blanking intervals, as long as the pulse train does not exceed 0.1 seconds. As an alternative (provided the transmitter operates for longer than 0.1 seconds) or in cases where the pulse train exceeds 0.1 seconds, the measured field strength shall be determined from the average absolute voltage during a 0.1 second interval during which the field strength is at its maximum values.
8. If the emissions level of the EUT in peak mode was 3 dB lower than the average limit specified, then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions which do not have 3 dB margin will be repeated one by one using the quasi-peak method for below 1GHz.
9. For testing above 1GHz, the emissions level of the EUT in peak mode was lower than average limit (that means the emissions level in peak mode also complies with the limit in average mode), then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.
10. In case the emission is lower than 30MHz, loop antenna has to be used for measurement and the recorded data should be QP measured by receiver. High - Low scan is not required in this case.

The following table is the setting of spectrum analyzer and receiver.

Spectrum Parameter	Setting
Start ~Stop Frequency	9KHz~150KHz/RB 200Hz for QP
Start ~Stop Frequency	150KHz~30MHz/RB 9KHz for QP
Start ~Stop Frequency	30MHz~1000MHz/RB 120KHz for QP
Start ~Stop Frequency	1GHz~26.5GHz 1MHz/1MHz for Peak, 1MHz/10Hz for Average

Receiver Parameter	Setting
Start ~Stop Frequency	9KHz~150KHz/RB 200Hz for QP
Start ~Stop Frequency	150KHz~30MHz/RB 9KHz for QP
Start ~Stop Frequency	30MHz~1000MHz/RB 120KHz for QP

7.3. TEST SETUP

Radiated Emission Test-Setup Frequency Below 30MHz

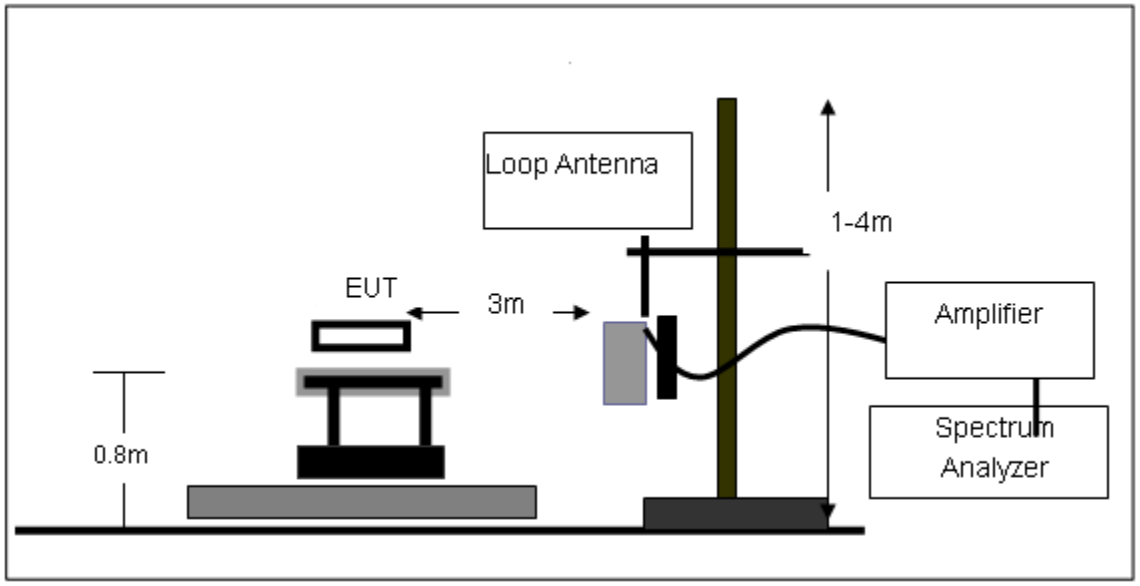

RADIATED EMISSION TEST SETUP 30MHz-1000MHz

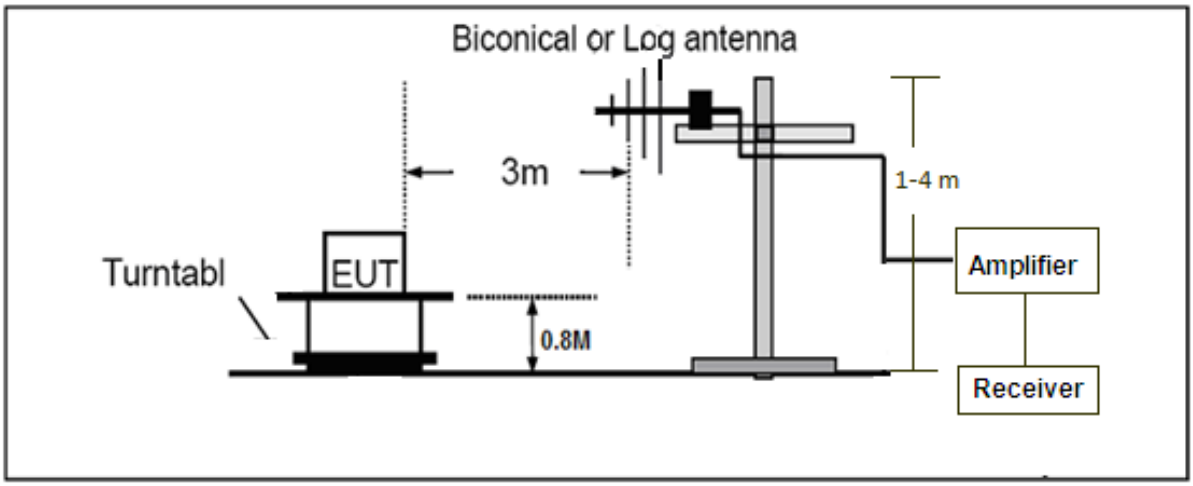

7.4. TEST RESULT

RADIATED EMISSION BELOW 30MHZ

EUT：	Radio control	Model Name. ：	LM208538
Temperature：	20 ℃	Relative Humidtity：	48%
Pressure：	1010 hPa	Test Voltage ：	DC3V
Test Mode ：	Mode 1	Polarization :	--

Frequency MHz	Polarization	Reading dB(uV) PK	Factor dB (1/m)	Level dB(uV/m) PK	Limit dB(uV/m) PK	Margin dB	Pass/Fail
27.150	Face	51.6	14.5	66.1	100	33.9	Pass
27.150	Side	47.2	14.5	61.7	100	38.3	Pass
Frequency MHz	Polarization	Reading dB(uV) AV	Factor dB (1/m)	Level dB(uV/m) AV	Limit dB(uV/m) AV	Margin dB	Pass/Fail
27.150	Face	44.9	14.5	59.4	80	20.6	Pass
27.150	Side	41.5	14.5	56.0	80	24.0	Pass

Note: Other emission from 9 kHz to 30 MHz are considered as ambient noise. No recording in the test report.

RADIATED EMISSION 30MHz- 1GHZ

EUT：	Radio control	Model Name. ：	LM208538
Temperature：	20 ℃	Relative Humidtity：	48%
Pressure：	1010 hPa	Test Voltage ：	DC3V
Test Mode ：	Mode 1	Polarization :	Horizontal

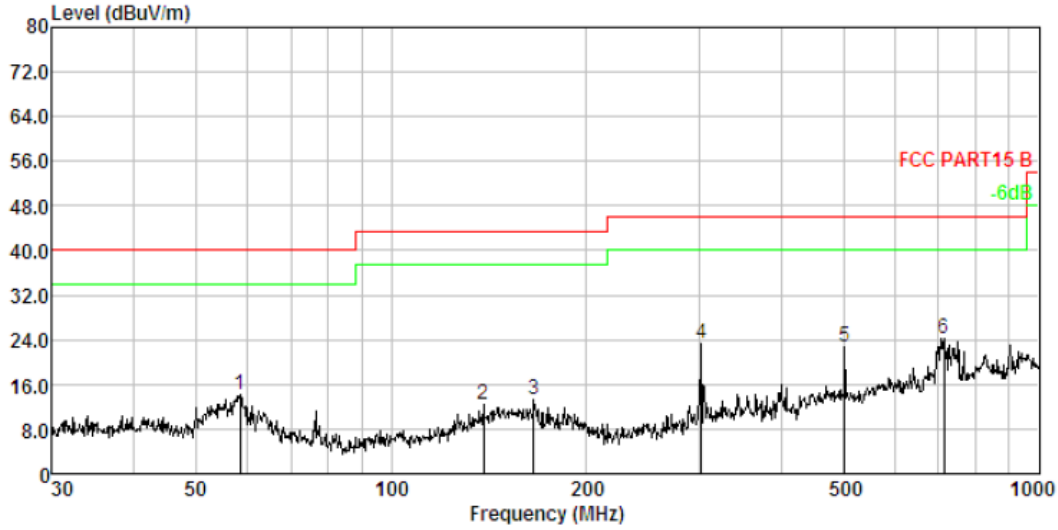

No.	Freq MHz	Cable Loss dB	ANT Factor dB/m	Receiver Reading dBuV	Preamp Factor dB	Emission Level dBuV/m	Limit dBuV/m	Over Limit dB	Remark
1.	58.407	1.66	12.09	30.48	30.20	14.03	40.00	-25.97	Peak
2.	138.874	2.44	13.28	27.03	30.50	12.25	43.50	-31.25	Peak
3.	166.068	2.60	13.54	27.62	30.57	13.19	43.50	-30.31	Peak
4.	301.422	3.14	13.22	37.71	30.77	23.30	46.00	-22.70	Peak
5.	501.179	3.60	17.08	32.89	30.95	22.62	46.00	-23.38	Peak
6.	714.173	3.93	20.40	30.89	31.07	24.15	46.00	-21.85	Peak

RESULT: PASS

EUT：	Radio control	Model Name. ：	LM208538
Temperature：	20 ℃	Relative Humidtity：	48%
Pressure：	1010 hPa	Test Voltage ：	DC3V
Test Mode ：	Mode 1	Polarization :	Vertical

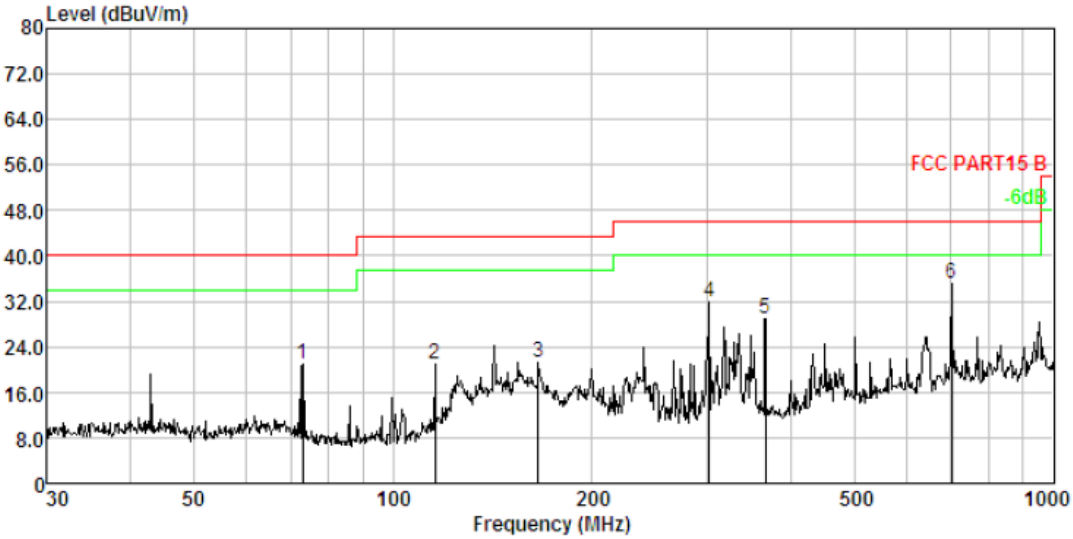

No.	Freq MHz	Cable Loss dB	ANT Factor dB/m	Receiver Reading dBuV	Preamp Factor dB	Emission Level dBuV/m	Limit dBuV/m	Over Limit dB	Remark
1.	73.103	1.86	9.91	39.42	30.28	20.91	40.00	-19.09	Peak
2.	115.726	2.28	11.63	37.45	30.44	20.92	43.50	-22.58	Peak
3.	166.068	2.60	13.54	35.56	30.57	21.13	43.50	-22.37	Peak
4.	301.422	3.14	13.22	46.36	30.77	31.95	46.00	-14.05	Peak
5.	366.823	3.32	14.56	41.99	30.84	29.03	46.00	-16.97	Peak
6.	701.761	3.91	20.17	42.10	31.07	35.11	46.00	-10.89	Peak

RESULT: PASS

Note:

Factor=Antenna Factor + Cable loss, Margin=Result-Limit.

The “Factor” value can be calculated automatically by software of measurement system.

The mode 1 is the worst case, and only the data of the worst case recorded in this test report.

8. 20DB BANDWIDTH

8.1. MEASUREMENT PROCEDURE

1. Connect EUT RF output port to the Spectrum Analyzer through an RF attenuator
2. Set the EUT Work on the top, the middle and the bottom operation frequency individually.
3. Set SPA Centre Frequency = Operation Frequency, RBW= 10 KHz, VBW⩾3×RBW.
4. Set SPA Trace 1 Max hold, then View.

8.2. TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION)

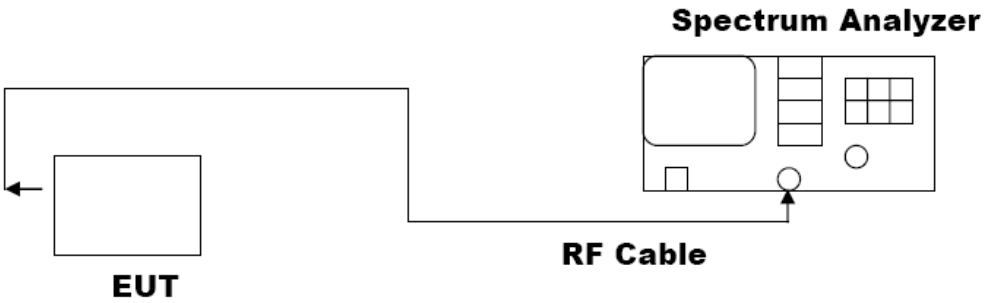

8.3. MEASUREMENT RESULTS

TEST ITEM	20DB BANDWIDTH
TEST MODE	Mode1

Test Data (MHz)		Criteria
Operate channel	0.046	PASS

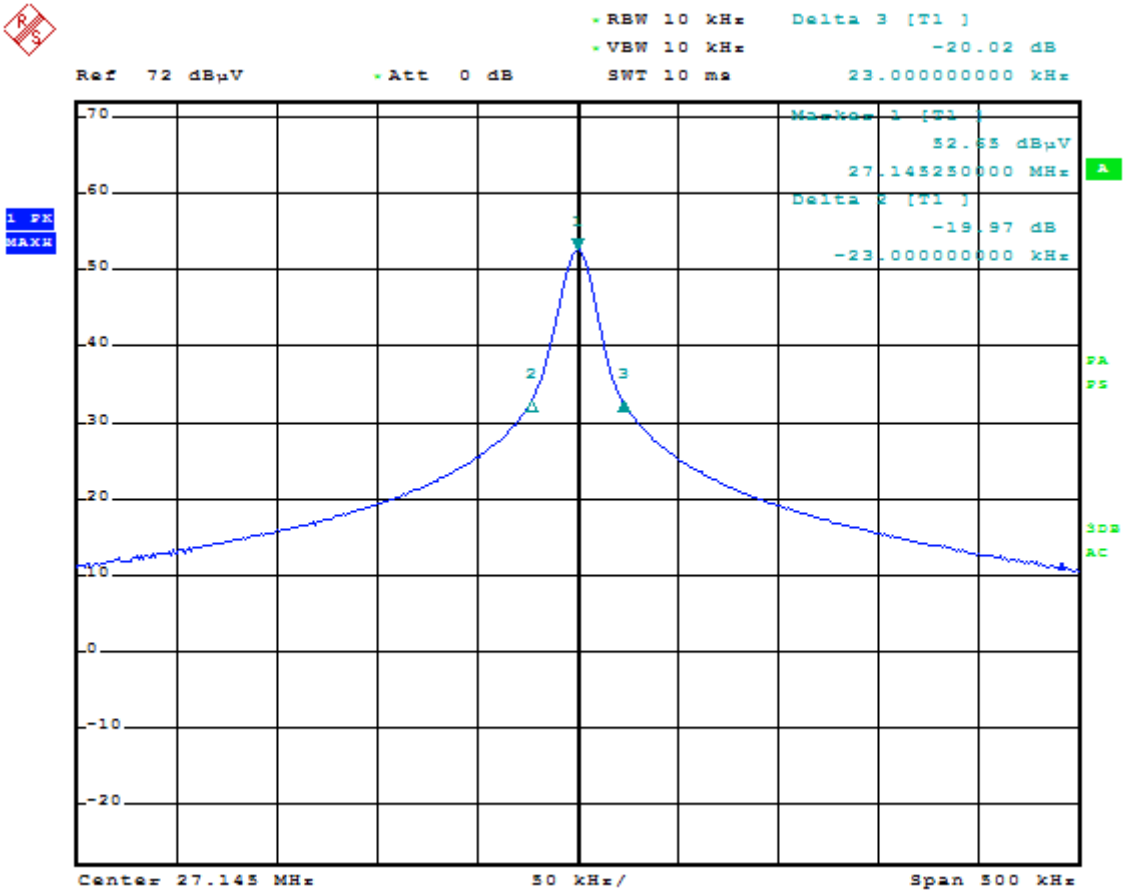

APPENDIX A: PHOTOGRAPHS OF TEST SETUP

RADIATED EMISSION TEST SETUP BELOW 1GHz

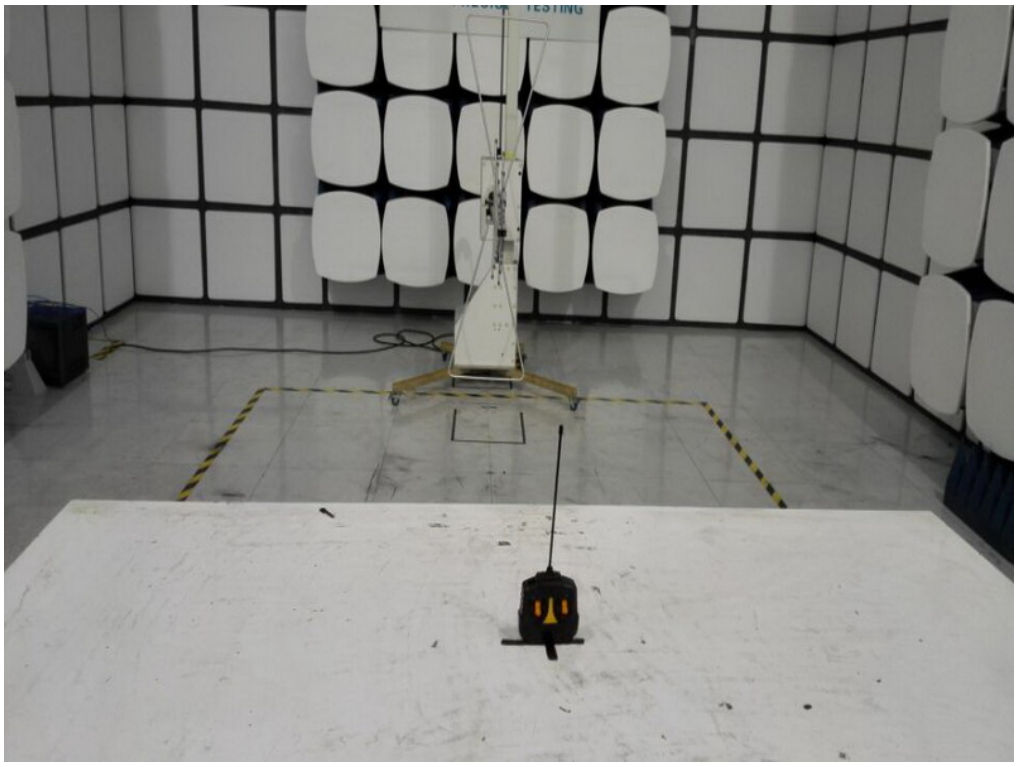

APPENDIX B: PHOTOGRAPHS OF EUT

TOP VIEW OF EUT

BOTTOM VIEW OF EUT

FRONT VIEW OF EUT

BACK VIEW OF EUT

LEFT VIEW OF EUT

RIGHT VIEW OF EUT

OPEN VIEW OF EUT

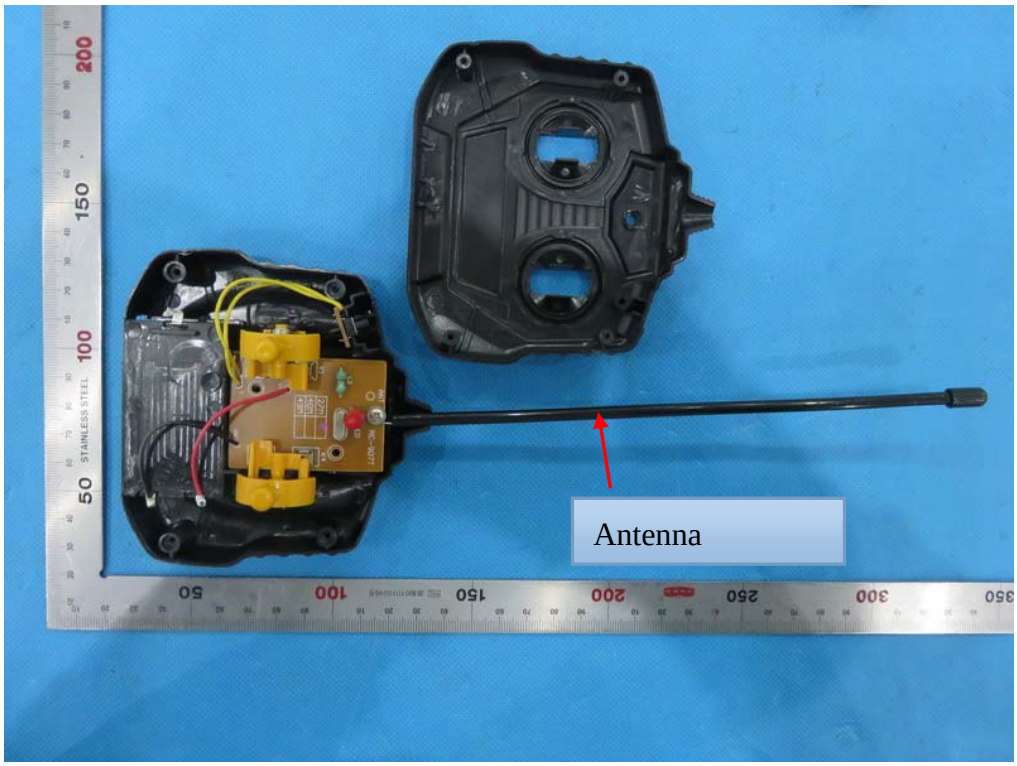

INTERNAL VIEW OF EUT-1

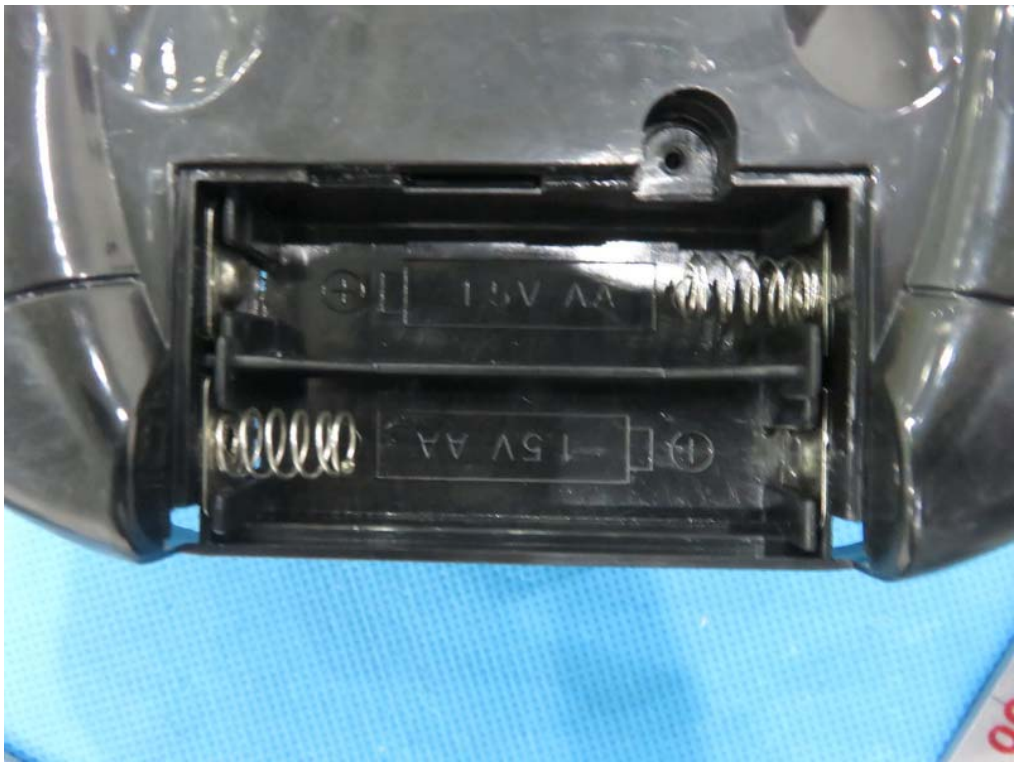

INTERNAL VIEW OF EUT-2

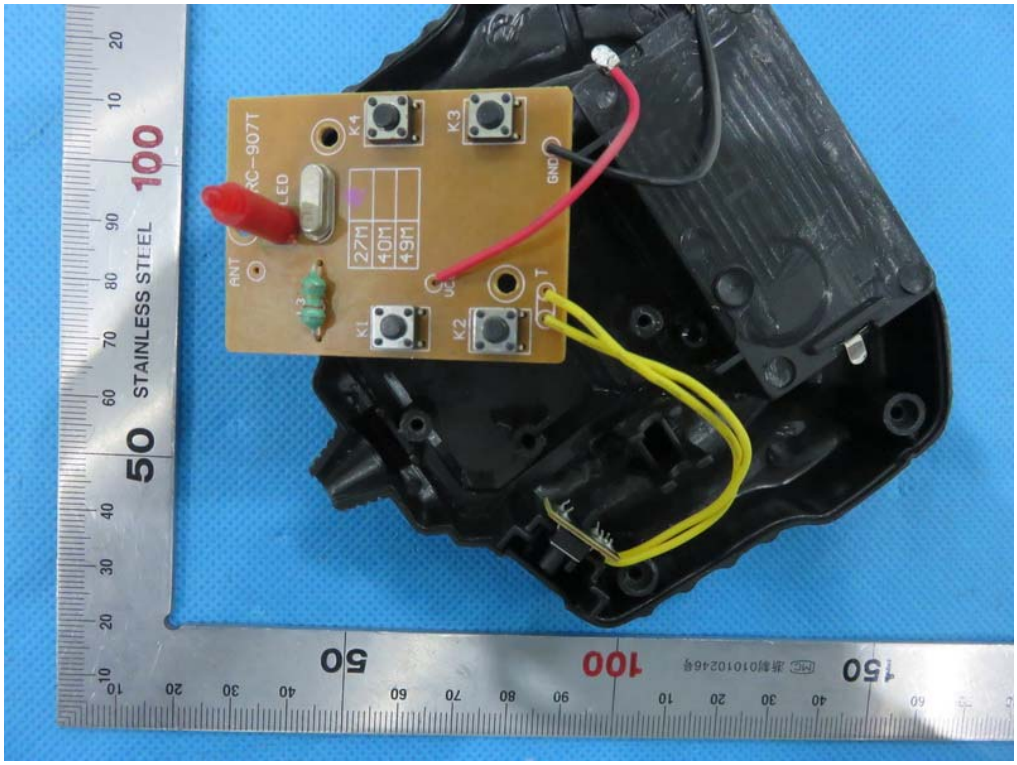

INTERNAL VIEW OF EUT-3

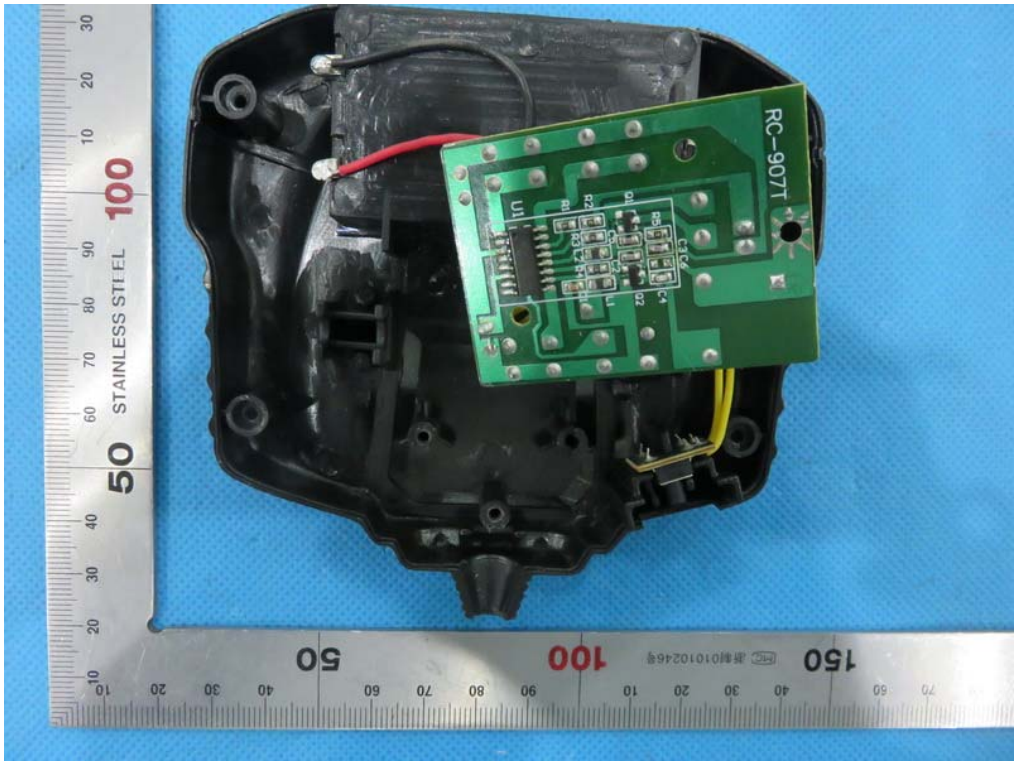

INTERNAL VIEW OF EUT-4

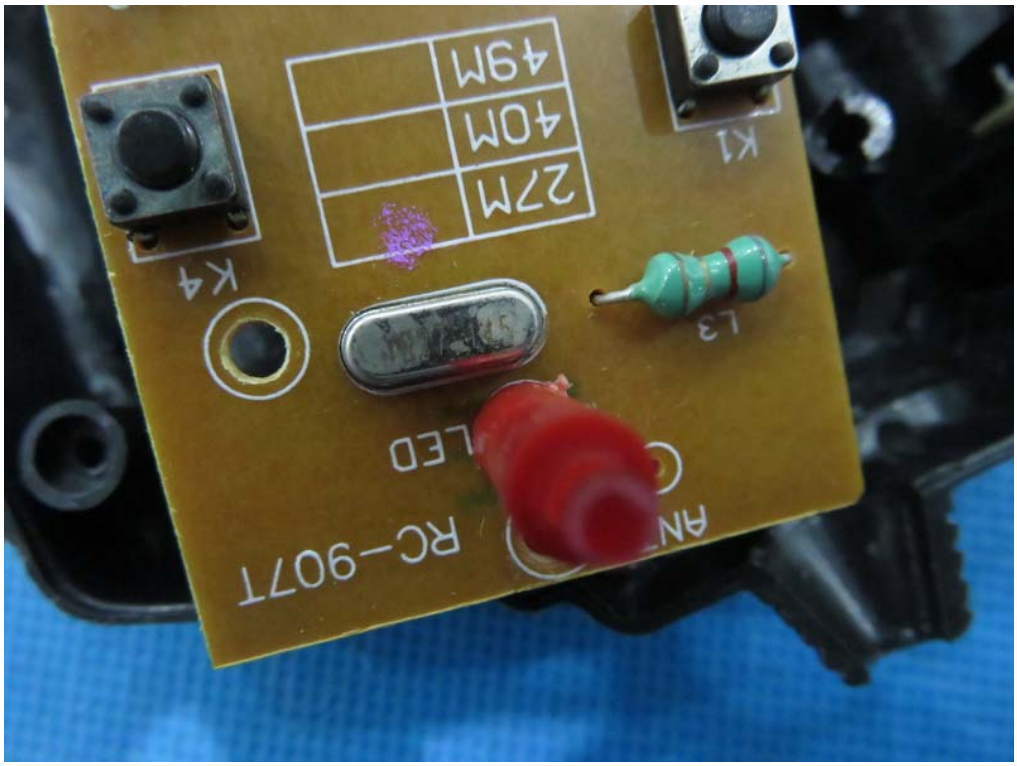

----END OF REPORT----