

LEVITON PART NUMBER (Global)

0XB1347890000


MANUFACTURER NAME	MANUFACTURER PART NUMBER
JOHANSON TECHNOLOGY	2450AT18D0100E

NOTES:

1. SINGLE SOURCE: ALL ALTERNATES MUST HAVE ENGINEERING APPROVAL
2. SEE FOLLOWING PAGES FOR PURCHASING INFO FROM DATA SHEET
3. ITEM MUST BE ROHS COMPLIANT

MANUFACTURING PART NUMBER EXPLANATION:
SEE MANUFACTURER DATA SHEET FOR DETAILS

NOTE: As of 09/23/2013 all new parts created to unified P/N system

STATUS: Production Release	REV.	DATE	ECO NUMBER	CHGD	APVD					
	A	02/22/2016	0000000	NRD	RY7					
	-	-	-	-	-					
	-	-	-	-	-					
	-	-	-	-	-					
	-	-	-	-	-					
			UNLESS OTHERWISE SPECIFIED: DO NOT SCALE DRAWING. ALL DIMENSIONS ARE IN INCHES. ALL ANGLES ARE IN DEGREES.		TITLE:					
	The information in this document is the exclusive PROPRIETARY property of LEVITON MFG. CO., INC. It is disclosed with the understanding that acceptance or review by the recipient constitutes an undertaking by the recipient: (1) to hold this information in strict confidence. (2) not to disclose, duplicate, copy, or use the information, in whole or in part, for any purpose other than that for which disclosed. Copyright 2009. Unpublished. All Rights Reserved.		TOLERANCES		IC ANTENNA 2.45GHz DETUNE RESILIENT SMD					
			INCH	METRIC	DWN BY	NRD	02/22/2016	ENGRG	RY7	02/22/2016
			.XX ± .01 .XXX ± .005	.X ± .2 mm .XX ± .1 mm	CHK BY	RY7	02/22/2016	MFG	RY7	02/22/2016
ANGLES: ± 1/2°			DWG NO.							
THIRD ANGLE PROJECTION		0XB1347-D01								
		SIZE PROJECT NO. 02636 REV								
ALL PRINTED COPIES ARE UNCONTROLLED		A				SCALE:1:1 SHEET 1 OF 7		A		



"High Frequency Ceramic Solutions"

2.45 GHz SMD Antenna, EIA 1210, Detuning resilient, Edge Mount Design

P/N 2450AT18D0100

Detail Specification: 9/17/2015



Page 1 of 6

This antenna is optimal for edge middle mounting; rectangular and circular PCB shape applications, go to pages 2-4 for more info.

General Specifications


Part Number	2450AT18D0100	Input/Output Power	2W max. (CW)
Frequency (MHz)	2400 - 2500	Impedance	50 Ω
Peak Gain	1.5 dBi typ. (XZ-total)	Reel Quantity	3,000
Average Gain	-1.0 dBi typ. (XZ-total)	Storage Temp	-40 to +85°C
Return Loss	10.0 dB min.	Total Radiation Efficiency¹	72%
Operating Temperature	-40 to +125°C	¹ Efficiency measured on 2450AT18D0100-EB1SMA 40x20mm EVB on page 2	

No	Terminal Function	
1	Feeding Point	3 GND
2	GND	4 GND



Mechanical Specifications

	In	mm
L	0.126 $\pm$ 0.008	3.20 $\pm$ 0.20
W	0.063 $\pm$ 0.008	1.60 $\pm$ 0.20
T	0.047 $\pm$ 0.008	1.20 $\pm$ 0.20
a	0.012 $\pm$.004/-0.008	0.30 $\pm$ 0.1/-0.2
b	0.020 $\pm$ 0.008	0.50 $\pm$ 0.20

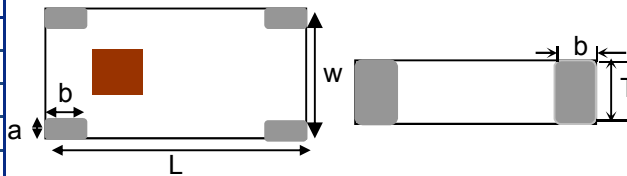

Need help designing the antenna in? Use our antenna design services! www.johansontechnology.com/ipcantennaservices

² Free layout reviews and if you need us to tune and characterize our antenna on your design (anechoic chamber) we can do that too (lab fee may apply for the latter).

Mounting Considerations 1: Standard Rectangular Layout

Mount these devices with the red square mark facing up. Otherwise, the antenna will not operate as intended.

Solder Resist

Land


50 Ω Trace (Grounded CPWG type is preferred)

GND Vias

Matching Circuits²

Want the layout file of this? Send us a message at:

www.johansontechnology.com/ask-a-question

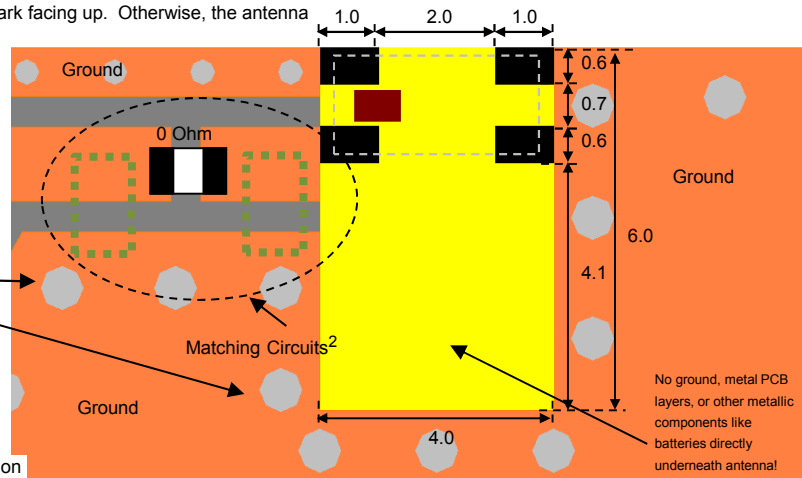

²It is recommended that the designer leave available slots for a "pi" (or shunt-series-shunt) network, even if all slots won't be used, this will prepare the PCB for the final mass production values of the matching circuit. The antenna matching network values above are used when antenna is mounted on Johanson's evaluation board. The matching values on client's PCB will be different. Go to: <http://johansontechnology.com/tuning> and see how to obtain the new values yourself if you have a network analyzer.



www.johansontechnology.com

4001 Calle Tecate • Camarillo, CA 93012 • TEL 805.389.1166 FAX 805.389.1821

Ver 3.0

2015 Johanson Technology, Inc. All Rights Reserved

"High Frequency Ceramic Solutions"

2.45 GHz SMD Antenna, EIA 1210, Detuning resilient, Edge Mount Design


P/N 2450AT18D0100

Detail Specification: 04/04/12

Page 2 of 6

This antenna is optimal for edge middle mounting; rectangular and circular PCB shape applications, go to pages 2-4 for more info.

Mounting Considerations 1: Standard Rectangular Layout (continued)

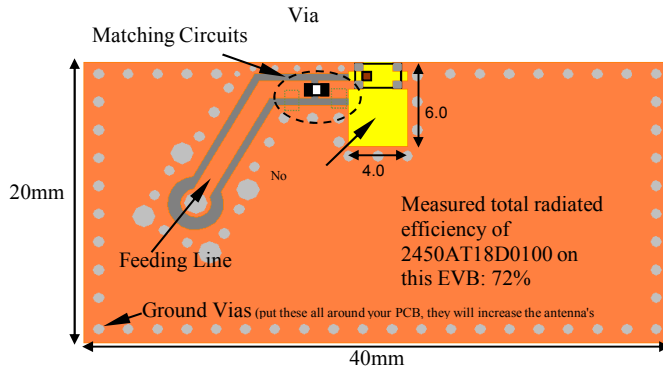

Orderable EVB p/n (comes with 1 female SMA connector mounted on the opposite side):

2450AT18D0100-EB1SMA

We offer 2 free layout reviews as well as antenna tuning and characterization services (lab fee may apply). For more info go to:

www.johansontechnology.com/ipcantennaservice


Want the layout file of the above? Send us a message at: www.johansontechnology.com/ask-a-question

To order a pre-tuned 50Ω EVB with a female SMA connector you see above Click here:

www.johansontechnology.com/request-a-sample

Reference p/n: 2450AT18D0100-EB1SMA

Mounting Considerations 2: Small clearance or "thin edge" applications

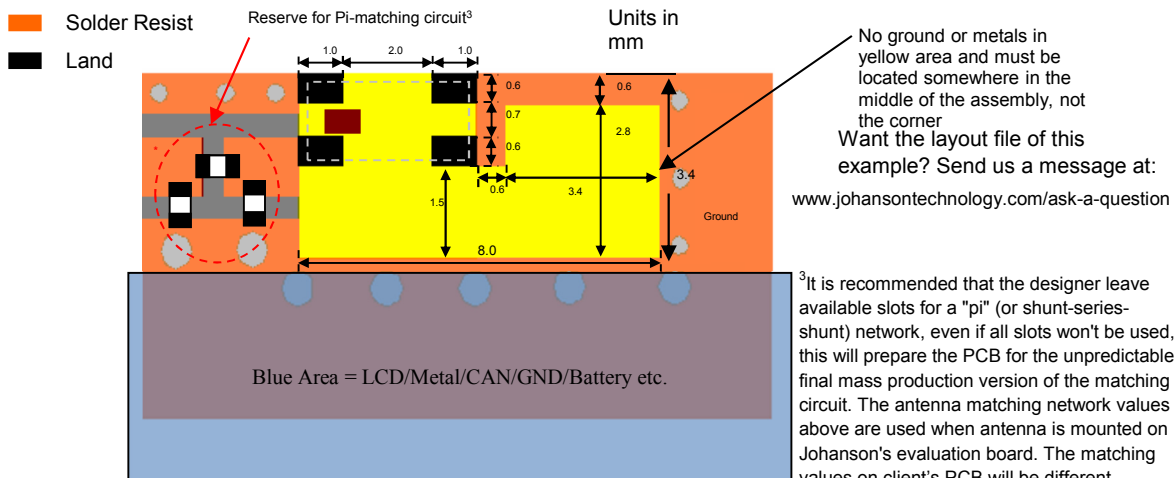

Note: There's no orderable EVB available for the above reference "Mounting Considerations 2" reference design

Johanson Technology, Inc. reserves the right to make design changes without notice. Please confirm the specifications and delivery conditions when placing your order. All sales are subject to Johanson Technology, Inc. terms and conditions.



www.johansontechnology.com

4001 Calle Tecate • Camarillo, CA 93012 • TEL 805.389.1166 FAX 805.389.1821

Ver 3.0

2015 Johanson Technology, Inc. All Rights Reserved

"High Frequency Ceramic Solutions"

2.45 GHz SMD Antenna, EIA 1210, Detuning resilient, Edge Mount Design


P/N 2450AT18D0100

Detail Specification: 04/04/12

Page 3 of 6


This antenna is optimal for edge middle mounting; rectangular and circular PCB shape applications, go to pages 2-4 for more info.

Mounting Considerations 3: Thin Edge + Circular PCB applications

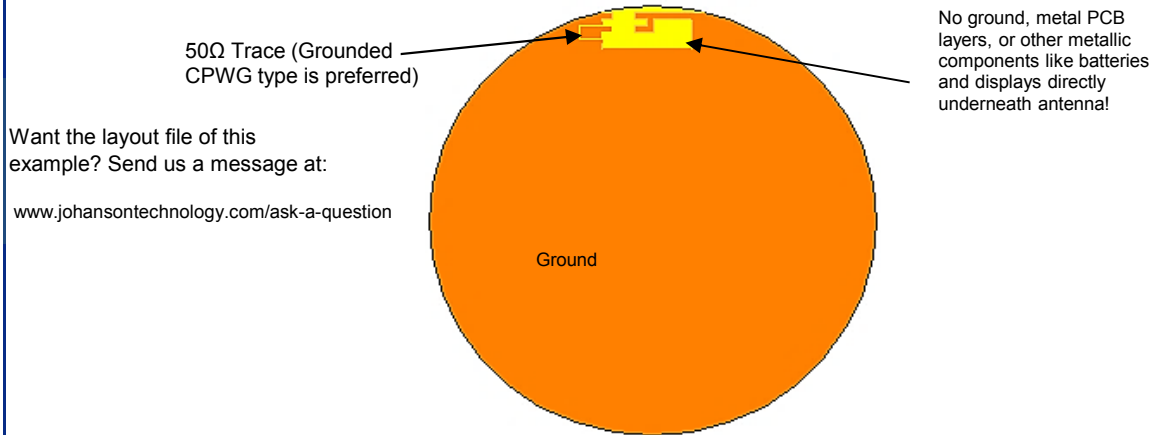

Note: There's no orderable EVB available for the above reference "Mounting Considerations 3" reference design

Mounting Considerations 4: Chip antenna fed from the right

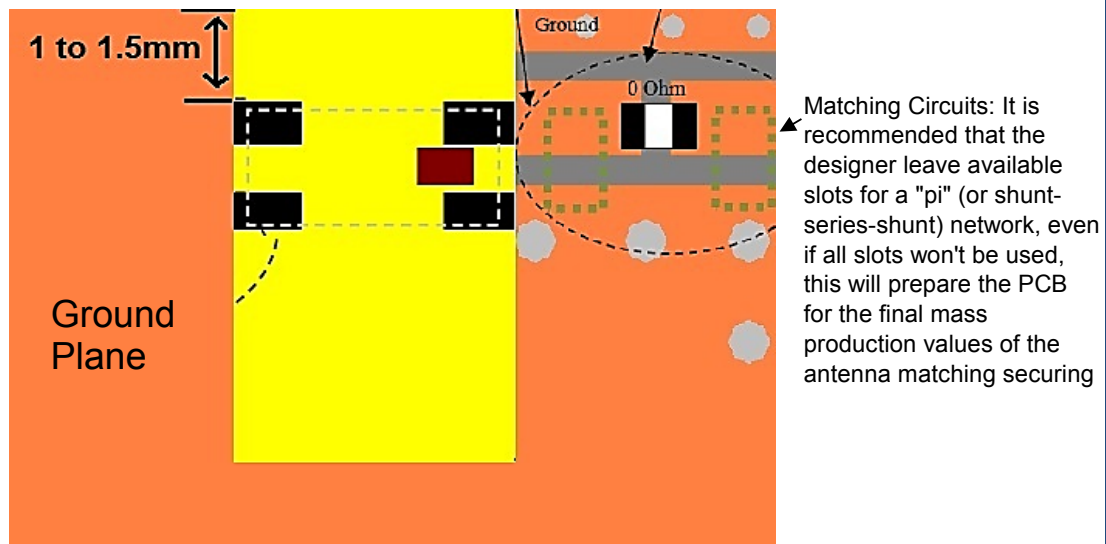

Note: There's no orderable EVB available for the above reference "Mounting Considerations 4" reference design

Johanson Technology, Inc. reserves the right to make design changes without notice. Please confirm the specifications and delivery conditions when placing your order. All sales are subject to Johanson Technology, Inc. terms and conditions.



www.johansontechnology.com

4001 Calle Tecate • Camarillo, CA 93012 • TEL 805.389.1166 FAX 805.389.1821

Ver 3.0

2015 Johanson Technology, Inc. All Rights Reserved

"High Frequency Ceramic Solutions"

2.45 GHz SMD Antenna, EIA 1210, Detuning resilient, Edge Mount Design


P/N 2450AT18D0100

Detail Specification: 04/04/12

Page 3 of 5

This antenna is optimal for edge middle mounting; rectangular and circular PCB shape applications, go to pages 2-4 for more info.

Typical Return Loss (S11) Electrical Performance (T=25°C)

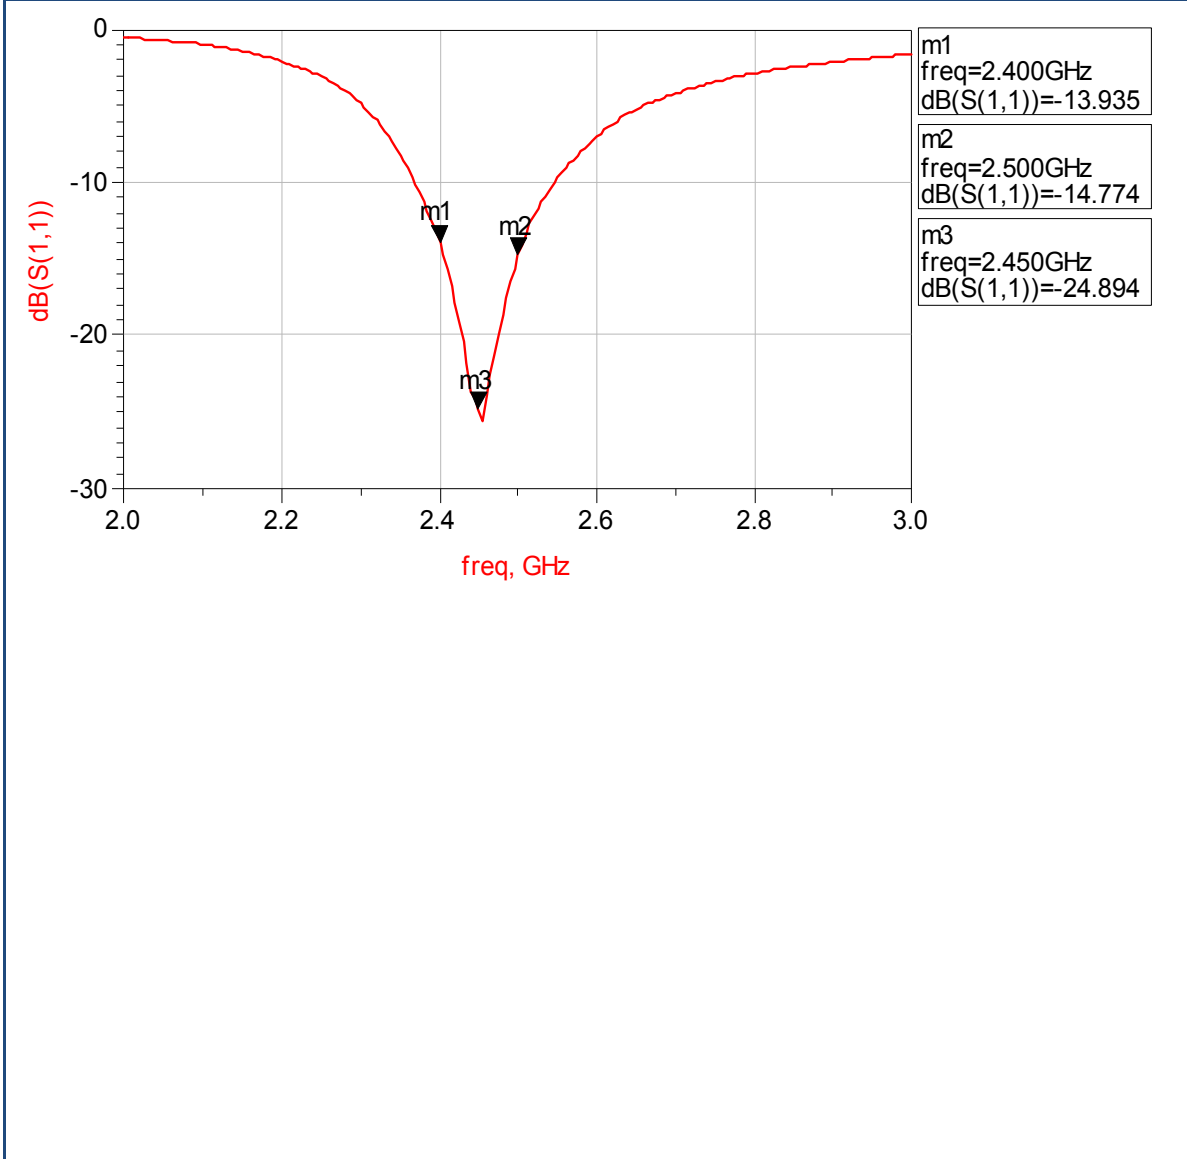

Johanson Technology, Inc. reserves the right to make design changes without notice. Please confirm the specifications and delivery conditions when placing your order. All sales are subject to Johanson Technology, Inc. terms and conditions.



www.johansontechnology.com

4001 Calle Tecate • Camarillo, CA 93012 • TEL 805.389.1166 FAX 805.389.1821

Ver 3.0

2015 Johanson Technology, Inc. All Rights Reserved

"High Frequency Ceramic Solutions"

2.45 GHz SMD Antenna, EIA 1210, Detuning resilient, Edge Mount Design

P/N 2450AT18D0100


Detail Specification: 9/17/2015

Page 4 of 5



This antenna is optimal for edge middle mounting; rectangular and circular PCB shape applications, go to pages 2-4 for more info.

Typical EM Radiation Performance (T=25°C)



Typical Radiation Patterns

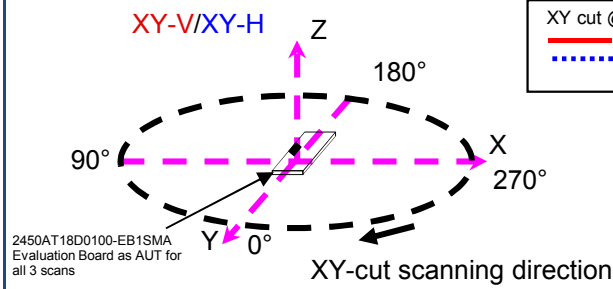


XY cut @2.45GHz
— Vertical
- - - Horizontal

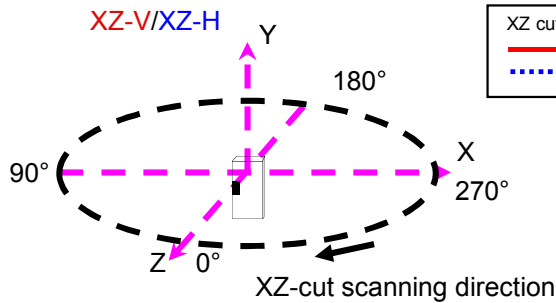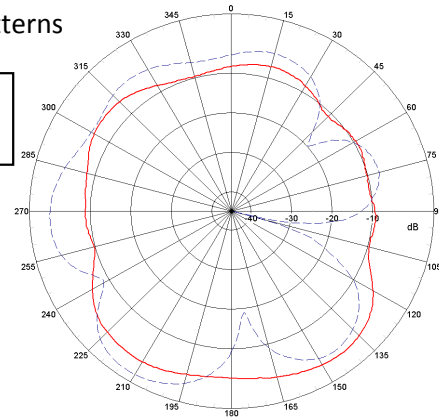

XZ cut @2.45GHz
— Vertical
- - - Horizontal

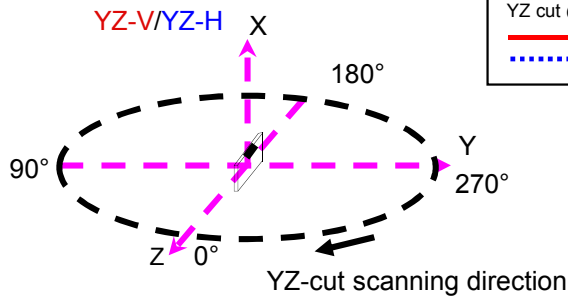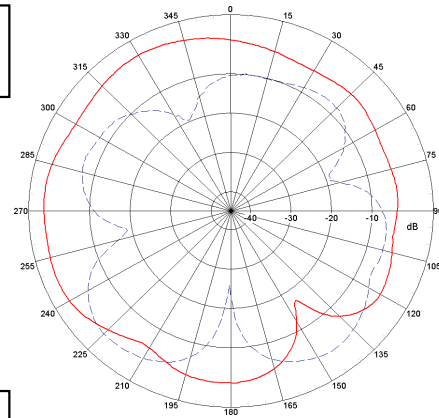

YZ cut @2.45GHz
— Vertical
- - - Horizontal

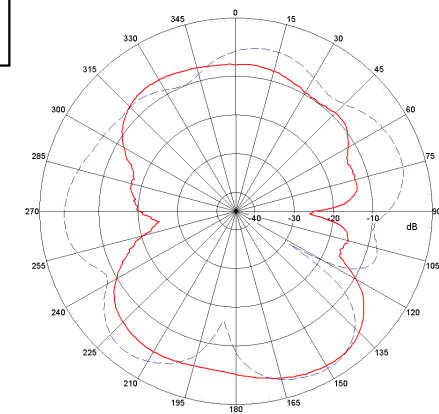

Johanson Technology, Inc. reserves the right to make design changes without notice. Please confirm the specifications and delivery conditions when placing your order. All sales are subject to Johanson Technology, Inc. terms and conditions.



www.johansontechnology.com

4001 Calle Tecate • Camarillo, CA 93012 • TEL 805.389.1166 FAX 805.389.1821

Ver 3.0

2015 Johanson Technology, Inc. All Rights Reserved

"High Frequency Ceramic Solutions"

2.45 GHz SMD Antenna, EIA 1210, Detuning resilient, Edge Mount Design

P/N 2450AT18D0100

Detail Specification: 9/17/2015

Page 5 of 5

This antenna is optimal for edge middle mounting; rectangular and circular PCB shape applications, go to pages 2-4 for more info.

Part Number Explanation

P/N Suffix	Packing Style	Bulk	Suffix = S	eg.2450AT18D0100S
		T & R	Suffix = E	e.g.. 2450AT18D0100E
	EVB p/n	2450AT18D0100-EB1SMA		
Recommended Storage Conditions of <u>uninstalled</u> product still on T&R		+5 ~ +35 °C, Humidity 45~75%RH, 18 mos. Max		

Antenna layout review, tuning, and characterization services

www.johansontechnology.com/ipcantennaservices

More SMD Chip Antennas at:

www.johansontechnology.com/antennas

Soldering Information

www.johansontechnology.com/ipcsoldering-profile

Antenna layout and tuning techniques (How to obtain the new antenna matching values)

www.johansontechnology.com/tuning

Packaging information

www.johansontechnology.com/ipcpackaging.html

RoHS Compliance

www.johansontechnology.com/technical-notes/rohs-compliance.html

MSL Info

www.johansontechnology.com/technical-notes/msl-rating.html

P/N Explanation and Breakdown

www.johansontechnology.com/ipc-pn-explained

Johanson Technology, Inc. reserves the right to make design changes without notice. Please confirm the specifications and delivery conditions when placing your order. All sales are subject to Johanson Technology, Inc. terms and conditions.

Technical Author: Manuel Carmona



www.johansontechnology.com

4001 Calle Tecate • Camarillo, CA 93012 • TEL 805.389.1166 FAX 805.389.1821

Ver 3.0

2015 Johanson Technology, Inc. All Rights Reserved