

Underwriters Laboratories Inc.
1285 Walt Whitman Road
Melville, New York 11747-3081
(631) 271-6200

**Report of Measurements
of Electromagnetic Compatibility Testing**

Test Report File No. : **NC1454** Date of issue: 6/19/2002
Applicant : Leviton Manufacturing
Model / Serial No. : HCKR
Product Type : Wireless Key Chain Remote Control
Power Supply : Battery Operated
Manufacturer : Same As Applicant

License holder : Same As Applicant
Address : 59-25 Little Neck Parkway
: Little Neck, NY 11362
Test Type : ☒ **Compliance Investigation**
☐ **Manufacturer's Specification**
Test Project Number : 02ME13082
References(s) : FCC ID: QGH-HCKR

Underwriters Laboratories Inc. authorizes the above-named company to reproduce this Report provided it is reproduced in its entirety.

Underwriters Laboratories Inc. reports apply only to the specific samples tested under stated test conditions. It is the manufacturer's responsibility to assure that additional production units of this model are manufactured with identical electrical and mechanical components. Underwriters Laboratories Inc. shall have no liability for any deductions, inferences or generalizations drawn by the client or others from Underwriters Laboratories Inc. issued reports.

This report is the confidential property of the client. As a mutual protection to our clients, the public and ourselves, extracts from the test report shall not be reproduced except in full without our written approval. This report shall not be used by the client to claim product endorsement by NVLAP or any agency of the US government.


Report Directory

1.0	<i>GENERAL - Product Description</i>	3
1.1	Device Configuration During Test	4
1.2	Deviations from ANSI C63.4	4
1.3	Device Modifications Necessary for Compliance	5
1.4	Test Summary	5
1.5	Immunity Performance Criteria	6
2.0	<i>EMISSIONS TEST REGULATIONS</i>	7
2.1	EUT OPERATION MODE - EMISSIONS TESTS	7
2.1.1	Radiated Emissions Test (10 Meter Semi-Anechoic Chamber)	8
2.1.2	Fundamental Frequency and Spurious Emissions Measurement Limit Calculations and Measurement Techniques	18
2.1.3	Automatic Cease Operation	19
2.1.4	Bandwidth Determination	20
3.0	<i>IMMUNITY TEST REGULATIONS</i>	21
3.1	EUT OPERATION MODE - IMMUNITY TESTS	21
4.0	<i>SUMMARY:</i>	22

1.0 GENERAL - Product Description

The Leviton Wireless Key Chain Remote Control Catalog Number HCCKR is designed for use with DHC RF Transceiver System. The system uses frequencies to transmit DHC commands to remotely turn ON and OFF lights and devices in the home. The remote control will permit the operation of devices with two different “addresses” the control of different lights and loads. The device allows the user to select a specific address for the first control buttons, while the second buttons are set to the next sequential address. The device will transmit up to 75 feet making it useful to turn ON/OFF lights and loads while in home or driveway

The data envelope for a typical DHC RF code is pictured below.

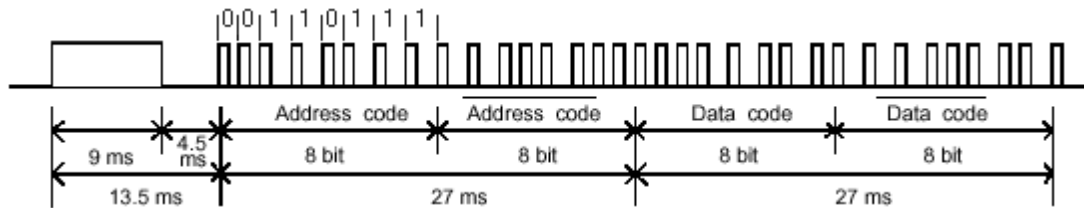

Each code starts with a 9ms burst of carrier followed by a 4.5ms silence. After the leader, there are 32 bits with binary 1 represented by 2.25ms between rising edges and binary 0 represented by 1.125ms between rising edges. The rising edge of the 33rd and final pulse marks the end of the last bit and is followed by a silence of approximately 40ms. The burst duration is 0.6ms.

The DHC RF carrier frequency is 310MHz.

1.1 Device Configuration During Test

The HCCKR Wireless Key Chain Remote Control is powered by a 3.2 Volt CR2032 Lithium .It was determined that worst case for this remote is constantly in the ON position . Therefore all testing was done in the ON position with fresh batteries. During testing the EUT was moved into different orientations to find the highest emissions and worst case orientation. The transmitting time is virtually immediate see data on page 22.

Device	Manufacturer	Model Number	Serial Number	FCC ID
Wireless Key Chain Remote Control	Leviton Manufacturing	HCCKR	_____	_____

"The results contained in this report reflect the results for this particular model and serial number. It is the responsibility of the manufacturer to ensure that all production models meet the intent of the requirements detailed within this report"

1.2 Deviations from ANSI C63.4



Not Applicable



As described below:

1.3 Device Modifications Necessary for Compliance

☒ N/A

☐ As described below:

1.4 Test Summary

Test	Basic Standard	Considered	Tested	In Compliance
Conducted Voltage Emissions	FCC Part 15 Subpart B Class A	✓	N/A	N/A
Discontinuous Interference (Click) Emissions		N/A	N/A	N/A
Conducted Current Emissions		N/A	N/A	N/A
Radiated Emissions	FCC Part 15 Subpart B Class A	✓	✓	✓
RFI Power		N/A	N/A	N/A
Harmonic Distortion	EN61000-3-2	N/A	N/A	N/A
Immunity to Voltage Fluctuations and Flicker	EN61000-3-3	N/A	N/A	N/A
Magnetic Field Emissions		N/A	N/A	N/A
Immunity to Electrostatic Discharge	EN61000-4-2	N/A	N/A	N/A
Immunity to Continuous Radiated Disturbances	EN61000-4-3	N/A	N/A	N/A
Immunity to Electrical Fast transients	EN61000-4-4	N/A	N/A	N/A
Immunity to Surges	EN61000-4-5	N/A	N/A	N/A
Immunity to Continuous Conducted Disturbances	EN61000-4-6	N/A	N/A	N/A
Immunity to Power-Frequency Magnetic Fields	EN61000-4-8	N/A	N/A	N/A
Immunity to Voltage Dips and Interruptions	EN61000-4-11	N/A	N/A	N/A

1.5 Immunity Performance Criteria

Performance Criteria A: The apparatus shall continue to operate as intended. No degradation of performance or loss of function is allowed below a performance level specified by the manufacturer, when the apparatus is used as intended. The performance level may be replaced by a permissible loss of performance. If the minimum performance level or the permissible performance loss is not specified by the manufacturer then either of these may be derived from the product description and documentation and what the user may reasonably expect from the apparatus if used as intended.

Performance Criteria B: The apparatus shall continue to operate as intended after the test. No degradation of performance or loss of function is allowed below a performance level specified by the manufacturer, when the apparatus is used as intended. The performance level may be replaced by a permissible loss of performance. During the test, degradation of performance is however allowed. No change of actual operating state or stored data is allowed. If the minimum performance level or the permissible performance loss is not specified by the manufacturer then either of these may be derived from the product description and documentation and what the user may reasonably expect from the apparatus if used as intended.

Performance Criteria C: Temporary loss of function is allowed, provided the function is self recoverable or can be restored by the operation of the controls.

1.5.1 Manufacturer's Criteria for Immunity

Not Applicable for this project

Environmental conditions in the lab:

	<u>Range</u>
Temperature:	20-25°C
Relative Humidity	30 - 60 %
Atmospheric pressure	680 - 1060 mbar

2.0 EMISSIONS TEST REGULATIONS

FCC Part 15, Subpart B, Class B

FCC Part 15, Subpart C, Section 15.231; 15.209; 15.205; 15.35

2.1 EUT OPERATION MODE - EMISSIONS TESTS

- ☐ Standby
- ☐ Test program (H-Pattern)
- ☐ Test program (color bar)
- ☐ Test program (customer specific)
- ☐ Practice operation
- ☐ Normal operation Mode:
- ☒ As per manufacturer's instructions: key Chain was constantly in the ON Mode

File Number: NC1454
Project Number: 02ME13082
Model Number: HCCKR

Issued: 6/19/2002
FCC ID: QGH-HCCKR

2.1.1 Radiated Emissions Test (10 Meter Semi-Anechoic Chamber)

☒ Test Applicable

Temperature: 23 °C
Humidity: 50 %RH
Pressure: 1023 milbar
Date test performed (mm/dd/yyyy): 06/19/2002

Measurement distance: ☒ 3 meters

Frequency Range: ☒ 30MHz - 1000MHz ☒ Electric
☒ 1GHz - 5GHz ☒ Electric

Test equipment used for final radiated emissions tests:

☒ **HP 8574A** **Hewlett-Packard** **EMI Receiver,** **Equipment No.: ME5A-461**
Range:30-1000 MHz Last Calibration Date: Jan. 25, 2002 Calibration Due Date: Jan. 25, 2003

Consisting of:

HP - 8566B	Hewlett-Packard	Spectrum Analyzer,
Resolution BW:	100kHz	9kHz to 30 MHz
	1MHz	30MHz to 1000 MHz
Video BW:	100kHz	9kHz to 30 MHz
	1MHz	30MHz TO 1000MHz
HP - 85662A	Hewlett-Packard	Analyzer Display
HP - 85650A	Hewlett-Packard	Quasi-Peak Adapter,
Quasi Peak BW:	200Hz	9kHz to 150kHz
	9kHz	150kHz to 30MHz
	120kHz	30 to 1000 MHz
HP - 85685A	Hewlett-Packard	Preselector

For Measurements above 1GHz:

☒ **HP - 8566B** **Hewlett-Packard** **Spectrum Analyzer,** **Equipment No.: ME5A-461**
Resolution BW: 1MHz
Video BW: 1MHz
Range:1.0-5.0 GHz Last Calibration Date: April 30, 2002 Calibration Due Date: April 30, 2003
☒ **HP - 85662A** **Hewlett-Packard** **Analyzer Display** **Equipment No. ME5A-461**
Last Calibration Date: April 30, 2002 Calibration Due Date: April 30, 2003

Test Accessories for Radiated Emissions:

☒ 94455-1	Ailtech	Biconnical Antenna	Equipment No.: ME5-439
Last Calibration Date: Oct. 15, 2001		Calibration Due Date: Oct. 15, 2002	
☒ 3146	EMCO	Log Periodic Antenna	Equipment No.: ME5-451
Last Calibration Date: Oct. 15, 2001		Calibration Due Date: Oct. 15, 2002	

File Number: NC1454
Project Number: 02ME13082
Model Number: HCCKR

Issued: 6/19/2002


FCC ID: QGH-HCCKR

☒ 3115	EMCO	Horn Antenna	Equipment No.:ME5A-766
Last Calibration Date: June 31, 2001 Calibration Due Date; June 31, 2002			
☒ 8449B	Hewlett Packard	1-26GHz Pre-Amp	Equipment No.:ME5-914
☒ E702A	Agilent Technologies	EMI Spectrum Analyzer	Equipment No.: ME5B-123
Range: 0.030-3.0GHz Last Calibration Date: Aug. 30,2001 Calibration Due Date: Aug. 30, 2002			
☒ 3121C	EMCO	Dipole Antennas	Equipment No.: ME5A-751
Last Calibration Date: Dec. 10, 2001 Calibration Due Date: : Dec. 10, 2002			
☒ Temp/Pressure	Oakton	Barometer	Equipment No.: ME4-263
Last Calibration Date: April 02,2002 Calibration Due Date: April. 02, 2003			
☒ 453320	Ex-Tech	Hydro-Thermometer	Equipment No.: ME4-264
Last Calibration Date: April 02,2002 Calibration Due Date: April. 02, 2003			

File Number: NC1454
Project Number: 02ME13082
Model Number: HCCKR

Issued: 6/19/2002

FCC ID: QGH-HCCKR

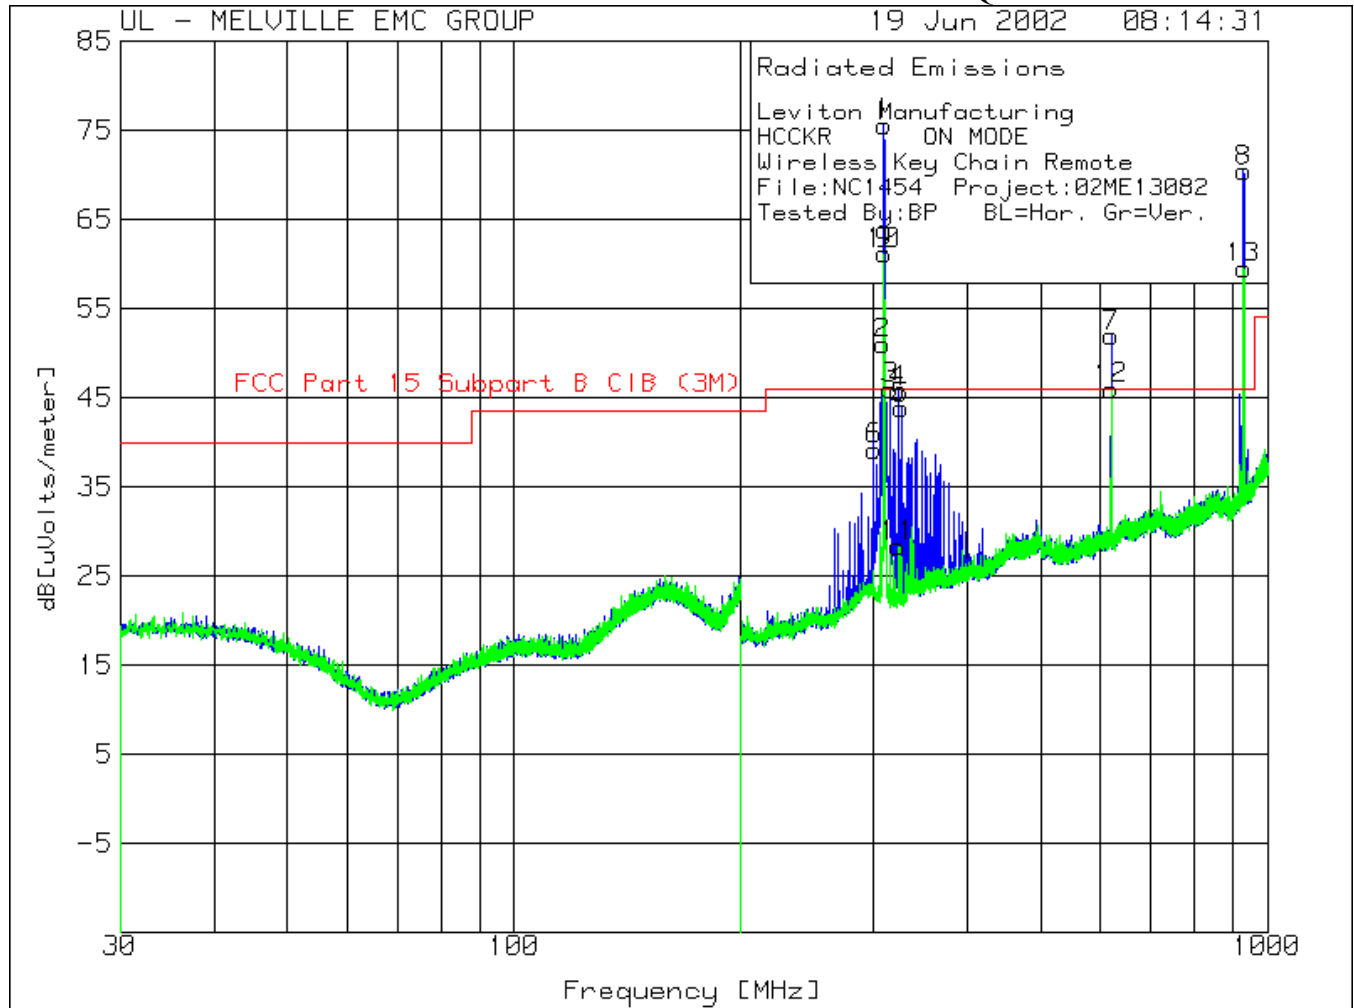

File Number: NC1454
Project Number: 02ME13082
Model Number: HCKKR

Issued: 6/19/2002
FCC ID: QGH-HCKKR

Leviton Manufacturing
HCKKR ON MODE
Wireless Key Chain Remote
File:NC1454 Project:02ME13082
Tested By:BP BL=Hor. Gr=Ver.

No.	Test Frequency [MHz]	Meter Reading [dB (uV)]	Gain/Loss Factor [dB]	Transducer Factor [dB]	Level dB[uVolts/meter]	Limit:1
-----	----------------------------	--------------------------------	-----------------------------	------------------------------	---------------------------	---------

Range: 3 200 - 1000MHz -----

309.7752	58.5 pk	2.4	14.7	75.6	95.321
Azimuth:314	Height:100	Horz	Margin [dB]		-19.721
619.9167	28.6 pk	3.7	19.6	51.9	75.321
Azimuth:237	Height:199	Horz	Margin [dB]		-23.421
929.7918	42.2 pk	4.5	23.7	70.4	75.321
Azimuth:314	Height:100	Horz	Margin [dB]		-4.921

Range: 4 200 - 1000MHz -----

309.7752	44 pk	2.4	14.7	61.1	95.321
Azimuth:141	Height:100	Vert	Margin [dB]		-34.22
619.9834	22.7 pk	3.7	19.6	46	75.321
Azimuth:315	Height:300	Vert	Margin [dB]		-29.32
929.7918	31.3 pk	4.5	23.7	59.5	75.321
Azimuth:72	Height:200	Vert	Margin [dB]		-15.82

LIMIT 1: FCC Part 15 Subpart C Section 15.35
pk - Peak detector
qp - Quasi-Peak detector
av - Average detector

File Number: NC1454
Project Number: 02ME13082
Model Number: HCCKR

Issued: 6/19/2002

FCC ID: QGH-HCCKR

Leviton Manufacturing
HCCKR ON MODE
Wireless Key Chain Remote
File:NC1454 Project:02ME13082
Tested By:BP BL=Hor. Gr=Ver.

Test Frequency [MHz]	Meter Reading [dB (uV)]	Gain/Loss Factor [dB]	Transducer Factor [dB]	Level dB[uVolts/meter]	Limit:1
----------------------------	--------------------------------	-----------------------------	------------------------------	---------------------------	---------

Range: 3 200 - 1000MHz

310.0398	47.65 av	2.4	14.7	64.75	75.32
Azimuth: 265	Height:106	Horz	Margin	[dB]:	-10.57

315.74	10.05 qp	2.4	14.6	27.05	46
Azimuth: 252	Height:102	Horz	Margin	[dB]:	-18

308.84	25.91 qp	2.4	14.8	43.11	46
Azimuth: 263	Height:106	Horz	Margin	[dB]:	-2.

323.23	-4.94 qp	2.5	14.9	12.46	46
Azimuth: 27	Height:102	Horz	Margin	[dB]:	-33

328.428	-9.04 qp	2.5	15.1	8.56	46
Azimuth: 0	Height:231	Horz	Margin	[dB]:	-37

300.33	22.74 qp	2.3	16	41.04	46
Azimuth: 223	Height:101	Horz	Margin	[dB]:	-4.

620.005	26.24 av	3.7	19.6	49.54	55.32
Azimuth: 255	Height:148	Horz	Margin	[dB]:	-5.78

930.018	25.61 av	4.5	23.7	53.81	55.32
Azimuth: 360	Height:104	Horz	Margin	[dB]:	-1.51

Range: 4 200 - 1000MHz

310.0171	45.21 av	2.4	14.7	62.31	75.32
Azimuth: 315	Height:147	Vert	Margin	[dB]:	-13.01

323.295	-1.44 qp	2.5	14.9	15.96	46
Azimuth: 21	Height:115	Vert	Margin	[dB]:	-30

620.04	16.92 av	3.7	19.6	40.22	55.32
Azimuth: 110	Height:158	Vert	Margin	[dB]:	-15.10


930.0144	22.3 av	4.5	23.7	50.5	55.32
Azimuth: 94	Height:102	Vert	Margin	[dB]:	-4.82

LIMIT 1: FCC Part 15 Subpart B ClB (3M)
pk - Peak detector
qp - Quasi-Peak detector
av - Average detector

File Number: NC1454
Project Number: 02ME13082
Model Number: HCCKR

Issued: 6/19/2002

FCC ID: QGH-HCCKR

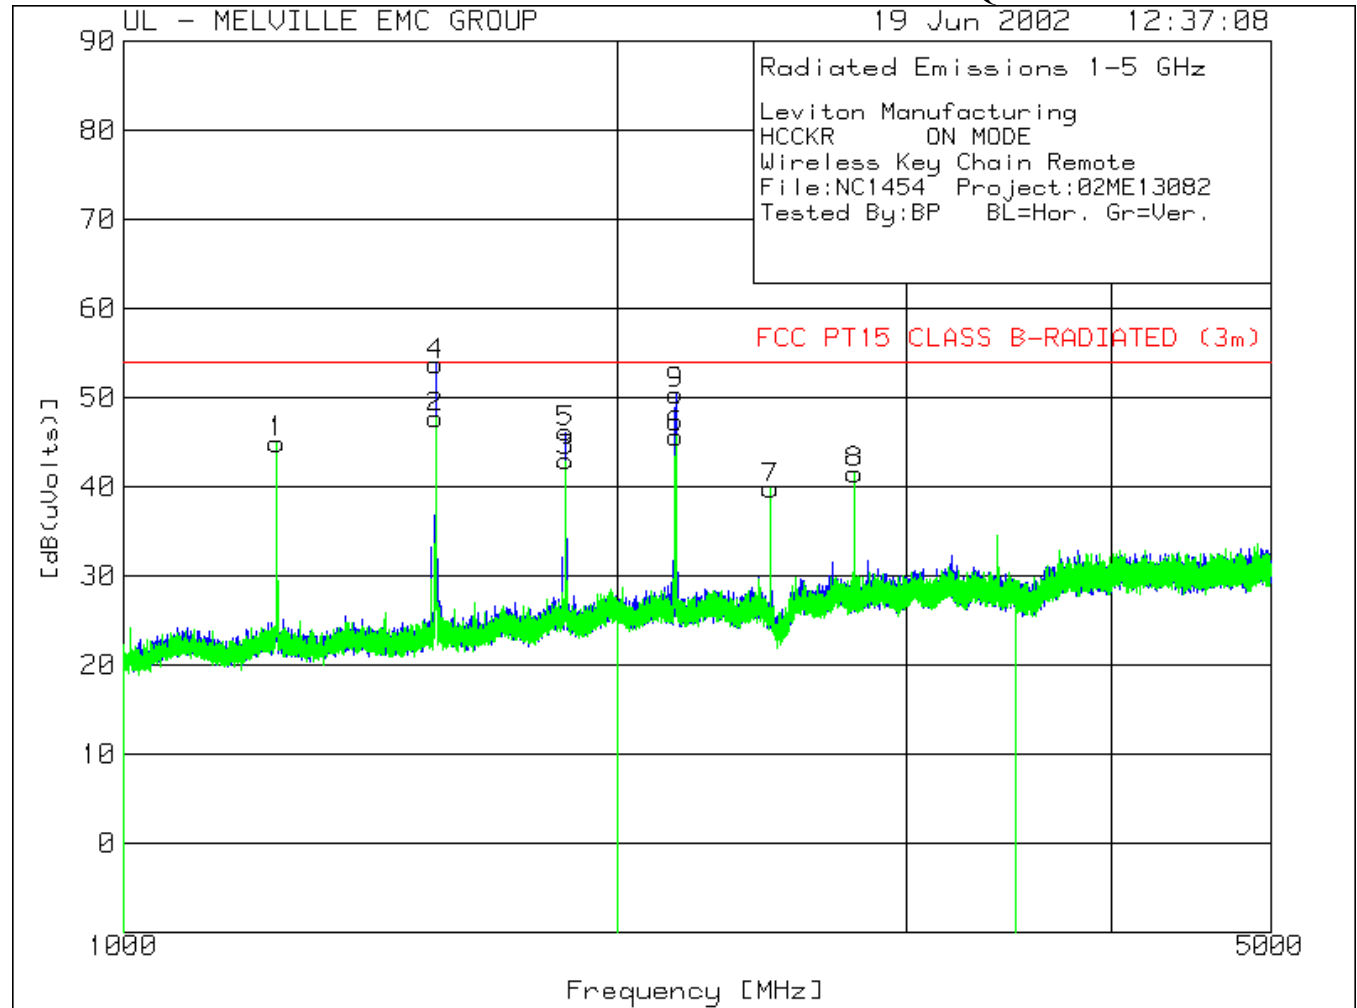

File Number: NC1454
Project Number: 02ME13082
Model Number: HCCKR

Issued: 6/19/2002
FCC ID: QGH-HCCKR

Leviton Manufacturing
HCCKR ON MODE
Wireless Key Chain Remote
File:NC1454 Project:02ME13082
Tested By:BP BL=Hor. Gr=Ver.

No.	Test Frequency [MHz]	Meter Reading [dB (uV)]	Gain/Loss Factor [dB]	Transducer Factor [dB]	Level [dB (uVolts)]	Limit:1
=====						
Range: 1 1000 - 2000MHz -----						
4	1550.208	59 pk	-32.2	26.9	53.7	54
	Azimuth:341	Height:200	Horz	Margin [dB]		-.3
5	1860.117	48.9 pk	-31.2	28.4	46.1	54
	Azimuth:132	Height:102	Horz	Margin [dB]		-7.
Range: 2 2000 - 3500MHz -----						
9	2169.726	51.3 pk	-30.6	29.7	50.4	54
	Azimuth:177	Height:200	Horz	Margin [dB]		-3.
Range: 4 1000 - 2000MHz -----						
1	1239.967	52.4 pk	-33.1	25.6	44.9	54
	Azimuth:181	Height:100	Vert	Margin [dB]		-9.
2	1550.042	53 pk	-32.2	26.9	47.7	54
	Azimuth:125	Height:100	Vert	Margin [dB]		-6.
3	1860.117	45.7 pk	-31.2	28.4	42.9	54
	Azimuth:20	Height:100	Vert	Margin [dB]		-11
Range: 5 2000 - 3500MHz -----						
6	2169.726	46.5 pk	-30.6	29.7	45.6	54
	Azimuth:204	Height:100	Vert	Margin [dB]		-8.
7	2479.768	39.4 pk	-30.4	30.8	39.8	54
	Azimuth:340	Height:100	Vert	Margin [dB]		-14
8	2789.996	39.8 pk	-29.7	31.4	41.5	54
	Azimuth:196	Height:199	Vert	Margin [dB]		-12

LIMIT 1: FCC PT15 CLASS B-RADIATED (3m)
LIMIT 2: NONE
LIMIT 3: NONE
LIMIT 4: NONE
LIMIT 5: NONE
LIMIT 6: NONE

pk - Peak detector
qp - Quasi-Peak detector
av - Average detector
avlg - denotes average log detection
tm - Trace Math Result

File Number: NC1454
Project Number: 02ME13082
Model Number: HCCKR


Issued: 6/19/2002
FCC ID: QGH-HCCKR

Leviton Manufacturing
HCCKR ON MODE
Wireless Key Chain Remote
File:NC1454 Project:02ME13082
Tested By:BP BL=Hor. Gr=Ver.

Test Frequency [MHz]	Meter Reading [dB (uV)]	Gain/Loss Factor [dB]	Transducer Factor [dB]	Level [dB (uVolts)]	Limit:1
=====					
Range: 1 1000 - 2000MHz					
1550.078	55.36 av	-32.2	26.9	50.06	54
Azimuth: 123	Height:200	Horz		Margin [dB]:	-3.
Range: 2 2000 - 3500MHz					
2170.093	49.73 av	-30.6	29.7	48.83	54
Azimuth: 123	Height:200	Horz		Margin [dB]:	-5.

LIMIT 1: FCC PT15 CLASS B-RADIATED (3m)
LIMIT 2: NONE
LIMIT 3: NONE
LIMIT 4: NONE
LIMIT 5: NONE
LIMIT 6: NONE

pk - Peak detector
qp - Quasi-Peak detector
av - Average detector
avlg - Average log detector

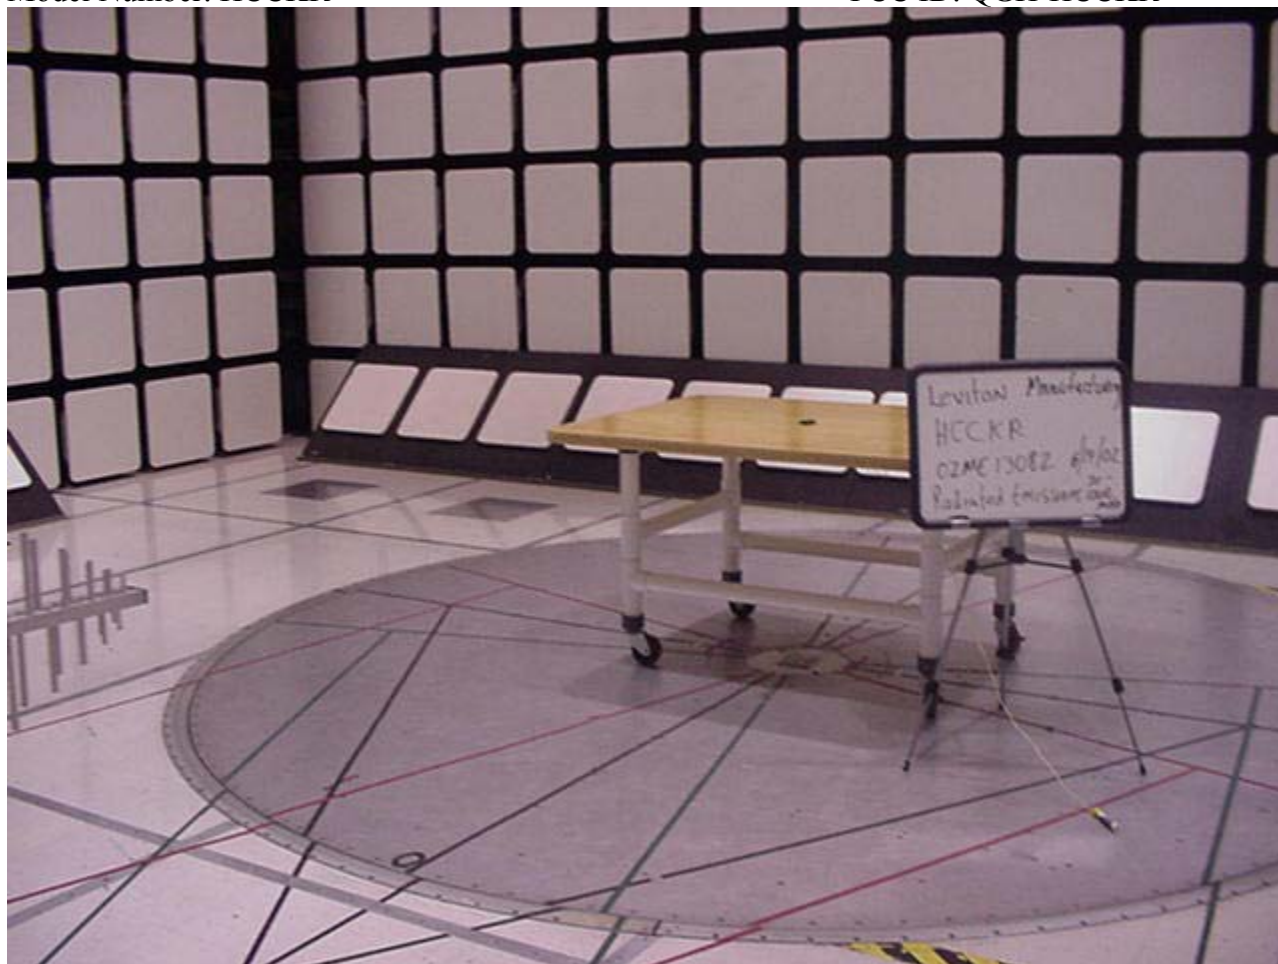

Radiated Emissions 30-1000MHz

File Number: NC1454
Project Number: 02ME13082
Model Number: HCCKR

Issued: 6/19/2002
FCC ID: QGH-HCCKR



Radiated Emissions (1-5GHz)

2.1.2 Fundamental Frequency and Spurious Emissions Measurement Limit Calculations and Measurement Techniques

Limit Calculation

Fundamental Frequency is 310.0395 MHz

From table in section 15.231

Limit = $[(310.0395 - 260) * (12500 - 3750) / (470 - 260)] + 3750$

Limit = 5834.995uV

Limit = Log 5834.995(20)

Limit = 75.321 dBuV/m

Limit for Spurious Emissions = $[(310.0395 - 260) * (1250 - 375) / (470 - 260)] + 375$

Limit for Spurious Emissions = 583.4995uV

Limit for Spurious Emissions = Log 583.4995 (20)

Limit for Spurious Emissions = 55.321 dBuV/m

Radiated Emissions Limit conversion from $\mu\text{V}/\text{m}$ to $\text{dB}\mu\text{V}/\text{m}$ (accordance with paragraph 15.209)

Radiated Emissions Limit ($\text{dB}\mu\text{V}/\text{m}$) = $20 * \log (\mu\text{V}/\text{m})$

Radiated Emissions Limit ($\text{dB}\mu\text{V}/\text{m}$) = $20 * \log (200)$

Radiated Emissions Limit ($\text{dB}\mu\text{V}/\text{m}$) = 46

Radiated Emissions test data obtained during measurements.

Field Strength ($\text{dB}\mu\text{V}/\text{m}$) = Measured field strength($\text{dB}\mu\text{V}/\text{m}$) + Antenna Factor(dB) + Cable Factor(dB)

Field Strength ($\text{dB}\mu\text{V}/\text{m}$) = 47.65 dBuV/m + 2.4 dB + 14.7 dB

Field Strength ($\text{dB}\mu\text{V}/\text{m}$) = 64.75


Average Measurement Technique using a Spectrum Analyzer

- Selected Peak Points for Maximum Orientation and Antenna height
- Peak Emission centered and Frequency Span set to Zero Hertz
- Reference Level set to less than 10 dB below peak emission
- Scale changed from logarithmic to linear
- Maximum orientation and Height adjusted for Peak Emission
- Video Bandwidth set to 1 Hz for average detection
- Measurement Made

2.1.3 Automatic Cease Operation

1. Set analyzer sweep time for 5 seconds
2. Key transmitter and release button
3. Ensure transmission stops before signal passes 5 second (10 divisions)


Complies (Y/N) YES

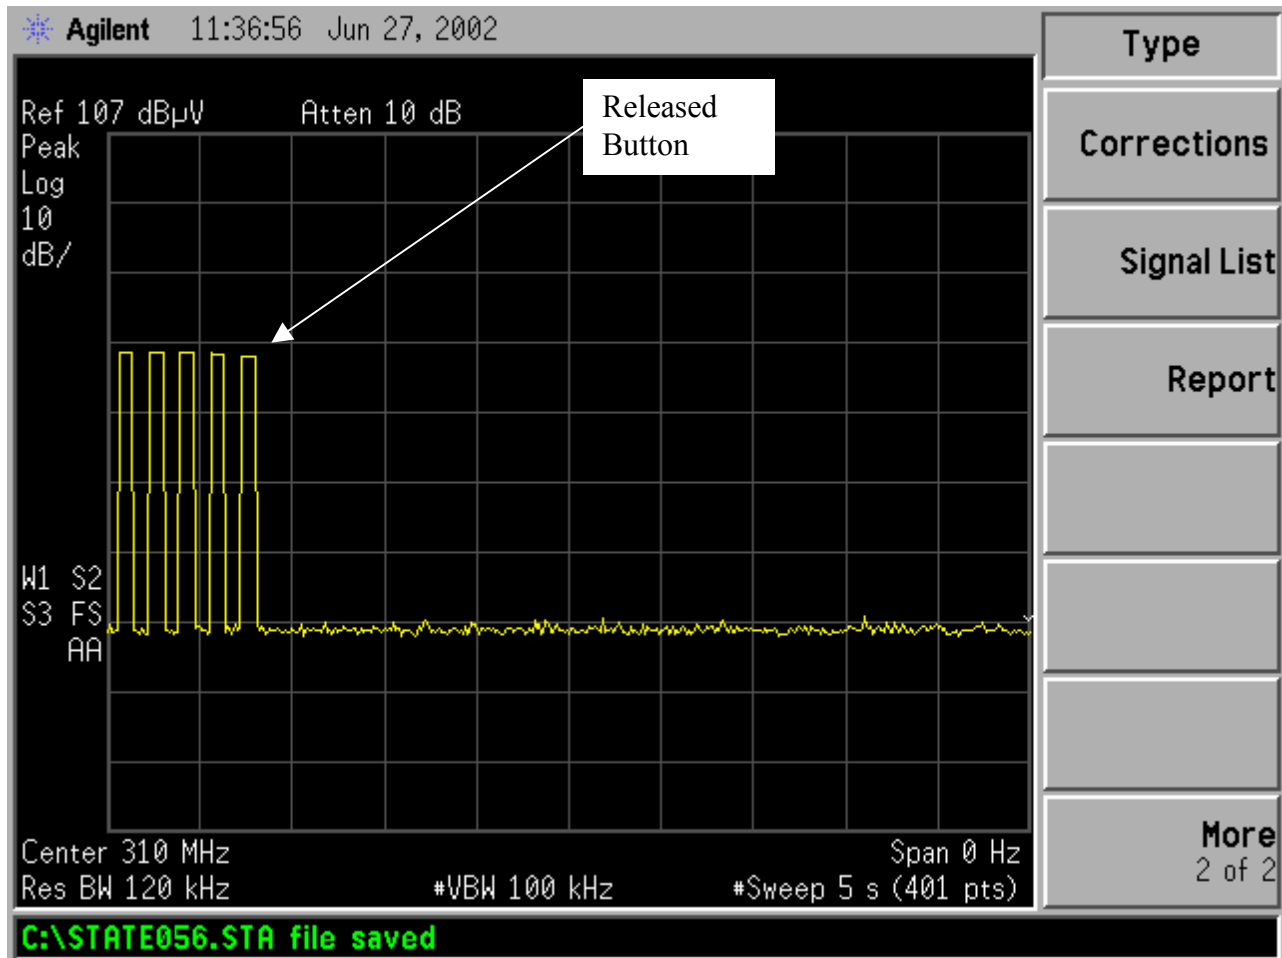

2.1.4 Bandwidth Determination

Max bandwidth (0.25% of Fundamental Frequency) = $310\text{MHz} * .0025 = 0.775\text{MHz}$

Complies (Y/N) YES

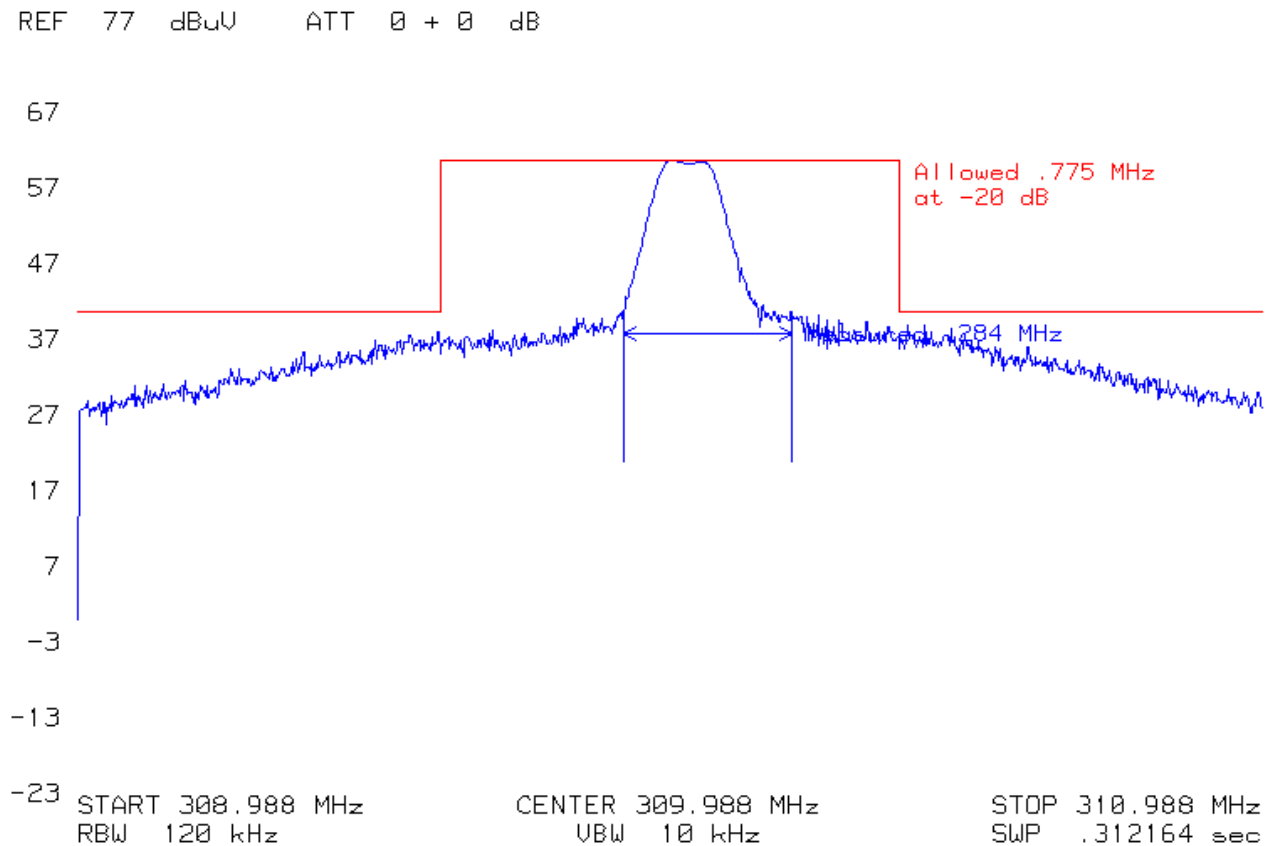

3.0 IMMUNITY TEST REGULATIONS

Not Applicable

In accordance with:

☐	IEC 801-2,	☐	EN61000-4-2	Electrostatic Discharge (ESD)
☐	IEC 801-3,	☐	EN61000-4-3	RF Immunity
☐	IEC 801-4,	☐	EN61000-4-4	Electrical Fast Transient (EFT)
☐	IEC 801-5,	☐	EN61000-4-5	Surge (Lighting)
☐	IEC 801-6,	☐	EN61000-4-6	Conducted Immunity
☐	IEC 801-8,	☐	EN61000-4-8	Magnetic Field Immunity
☐	IEC 801-11,	☐	EN61000-4-11	Voltage Dips and Interruptions
		☐	ENV50204	RF Immunity 900MHz pulse

3.1 EUT OPERATION MODE - IMMUNITY TESTS

- ☐ Standby
- ☐ Test program (H-Pattern)
- ☐ Test program (color bar)
- ☐ Test program (customer specific)
- ☐ Practice operation
- ☐ Normal operating Mode:
- ☐ As per manufacture's instructions:

File Number: NC1454
Project Number: 02ME13082
Model Number: HCCKR

Issued: 6/19/2002
FCC ID: QGH-HCCKR

4.0 SUMMARY:

The equipment under test has

☒ met the technical requirements as defined under section(s) ☒ 2.0 and ☐ 3.0

☐ not met the technical requirements as defined under section(s) ☐ 2.0 and ☐ 3.0


Test Start Date: 6/19/2002

Test Completion Date: 6/19/2002

- UNDERWRITERS LABORATORIES, INC. -

Project Engineer

Reviewer



Bernie Papocchia (Ext.23294)
Lead Engineering Associate
International EMC Services
Conformity Assessment Services-3014AMEL

Robert DeLisi (Ext.22452)
Staff Engineer
International EMC Services
Conformity Assessment Services -3014AMEL