



**FCC 47 CFR PART 15 SUBPART C AND ANSI C63.10:2009
TEST REPORT**

For

VoIP Wireless-N VPN Broadband Router

Model : BiPAC 6300VNP , BEC VG2600

Trade Name : Billion , BEC

Issued for

Billion Electric Co., Ltd.

**8F, No.192, Sec. 2, Zhongxing Rd., Xindian Dist.,
New Taipei City 231, Taiwan (R.O.C.)**

Issued by

**Compliance Certification Services Inc.
Hsinchu Lab.**

**NO. 989-1 Wen Shan Rd., Shang Shan Village,
Qionglin Shiang Hsinchu County 30741, Taiwan, R.O.C**

TEL: +886-3-5921698

FAX: +886-3-5921108

<http://www.ccsrf.com>

E-Mail : service@ccsrf.com

Issued Date: June 24, 2014



Note: This report shall not be reproduced except in full, without the written approval of Compliance Certification Services Inc. This document may be altered or revised by Compliance Certification Services Inc. personnel only, and shall be noted in the revision section of the document. The client should not use it to claim product endorsement by TAF or any government agencies. The test results of this report relate only to the tested sample identified in this report.



Revision History

Rev.	Issue Date	Revisions	Effect Page	Revised By
00	06/24/2014	Initial Issue	All Page 125	Michelle Chiu



TABLE OF CONTENTS

TITLE	PAGE NO.
1. TEST REPORT CERTIFICATION	4
2. EUT DESCRIPTION	5
3. DESCRIPTION OF TEST MODES	7
4. TEST METHODOLOGY	8
5. FACILITIES AND ACCREDITATION	8
5.1 FACILITIES	8
5.2 ACCREDITATIONS.....	8
5.3 MEASUREMENT UNCERTAINTY	9
6. SETUP OF EQUIPMENT UNDER TEST.....	10
7. FCC PART 15.247 REQUIREMENTS	12
7.1 6dB BANDWIDTH	12
7.2 MAXIMUM PEAK OUTPUT POWER	30
7.3 AVERAGE POWER	33
7.4 POWER SPECTRAL DENSITY	36
7.5 CONDUCTED SPURIOUS EMISSION	55
7.6 RADIATED EMISSION.....	80
7.7 CONDUCTED EMISSION	115
APPENDIX I SETUP PHOTOS	122



1. TEST REPORT CERTIFICATION

Applicant : Billion Electric Co., Ltd.
Address : 8F, No.192, Sec. 2, Zhongxing Rd., Xindian Dist.,
New Taipei City 231, Taiwan (R.O.C.)
Equipment Under Test : VoIP Wireless-N VPN Broadband Router
Model : BiPAC 6300VNP , BEC VG2600
Trade Name : Billion , BEC
Tested Date : May 06 ~ June 14 , 2014

APPLICABLE STANDARD	
Standard	Test Result
FCC Part 15 Subpart C AND ANSI C63.10:2009	PASS

WE HEREBY CERTIFY THAT: The above equipment has been tested by Compliance Certification Services Inc., and found compliance with the requirements set forth in the technical standards mentioned above. The results of testing in this report apply only to the product/system, which was tested. Other similar equipment will not necessarily produce the same results due to production tolerance and measurement uncertainties.

Approved by:

Sb. Lu
Sr. Engineer

Reviewed by:

Gundam Lin
Sr. Engineer



2. EUT DESCRIPTION

Product Name	VoIP Wireless-N VPN Broadband Router
Model Number	BiPAC 6300VNP , BEC VG2600
Identify Number	T140506S03
Received Date	May 06, 2014
Frequency Range	IEEE 802.11b/g, 802.11gn HT20 : 2412MHz ~ 2462MHz IEEE 802.11gn HT40 : 2422MHz ~ 2452MHz
Transmit Power	IEEE 802.11b : 25.41dBm (0.3473W) IEEE 802.11g : 26.52dBm (0.4488W) IEEE 802.11gn HT20 : 26.23dBm (0.4201W) IEEE 802.11gn HT40 : 24.35dBm (0.2721W)
Channel Spacing	IEEE 802.11b/g, 802.11gn HT20/HT40 : 5MHz
Channel Number	IEEE 802.11b/g, 802.11gn HT20: 11 Channels IEEE 802.11gn HT40 : 7 Channels
Transmit Data Rate	IEEE 802.11b : 11, 5.5, 2, 1 Mbps IEEE 802.11g : 54, 48, 36, 24, 18, 12, 9, 6 Mbps IEEE 802.11gn HT20 : 144.4, 130, 117, 115.6, 104, 86.7, 78, 72.2, 65, 58.5, 57.8, 52, 43.3, 39, 28.9, 26, 21.7, 19.5, 14.4, 13, 7.2, 6.5 Mbps IEEE 802.11gn HT40 : 300, 270, 243, 240, 216, 180, 162, 150, 135, 121.5, 120, 108, 90, 81, 60, 54, 45, 40.5, 30, 27, 15, 13.5 Mbps
Type of Modulation	IEEE 802.11b : DSSS (CCK, DQPSK, DBPSK) IEEE 802.11g : OFDM (64QAM, 16QAM, QPSK, BPSK) IEEE 802.11gn HT20/40 : OFDM (64QAM, 16QAM, QPSK, BPSK)
Frequency Selection	by software / firmware
Antenna Type	Dipole Antenna × 2 : Antenna 0 (Chain 0), Antenna Gain 2.36 dBi Antenna 1 (Chain 1), Antenna Gain 2.36 dBi
Power Rating	12Vdc, 15Vdc
Test Voltage	120Vac, 60Hz
DC Power Cable Type	Non-shielded cable 1.5m × 2 (Non-detachable) (For Adapter 1, 2)
I/O Port	RJ-45(LAN) Port × 4, RJ-11 Port × 2, USB Port × 1, RJ-45 (EWAN) Port × 1, Power Port × 1

**Power Adapter :**

No.	Manufacturer	Model No.	Power Input	Power Output
1	EGB	PAW024A15US	100-240Vac, 0.7A, 50/60Hz	15Vdc, 1.6 A
2	EGB	PAW018A12UL	100-240Vac, 0.5A, 50/60Hz	12Vdc, 1.5 A

Remark :

- 1. The sample selected for test was engineering sample that approximated to production product and was provided by manufacturer.*
- 2. For more details, please refer to the User's manual of the EUT.*
- 3. This submittal(s) (test report) is intended for FCC ID: QI3BIL-6300VNP filing to comply with Section 15.207, 15.209 and 15.247 of the FCC Part 15, Subpart C Rules.*
- 4. The difference between all models are trade name.*



3. DESCRIPTION OF TEST MODES

The EUT is an 802.11gn MIMO transceiver in VoIP Wireless-N VPN Broadband Router form factor.

For IEEE 802.11b/g, 802.11gn HT20/HT40 mode (2TX / 2RX) :

Chain 0 & Chain 1 transmit/receive.

Conducted Emission / Radiated Emission Test (Below 1 GHz)

1. The following test modes were scanned during the preliminary test:

No.	Pre-Test Mode
1	Normal Operating / Power Adapter 1
2	Normal Operating / Power Adapter 2

2. After the preliminary scan, the following test mode was found to produce the highest emission level.

Final Test Mode		
Emission	Radiated Emission	Normal Operating / Power Adapter 1 Normal Operating / Power Adapter 2
	Conducted Emission	Normal Operating / Power Adapter 1 Normal Operating / Power Adapter 2

Remark : Then, the above highest emission mode of the configuration of the EUT and cable was chosen for all final test items.

Conducted / Radiated Emission Test (Above 1 GHz)

IEEE 802.11b, 802.11g, 802.11gn HT20 mode

The EUT had been tested under operating condition.

There are three channels have been tested as following :

Channel	Frequency (MHz)
Low	2412
Middle	2437
High	2462

IEEE 802.11b mode : 1Mbps data rate (worst case) were chosen for full testing.

IEEE 802.11g mode : 6Mbps data rate (worst case) were chosen for full testing.

IEEE 802.11gn HT20 mode : 6.5Mbps data rate (worst case) were chosen for full testing.

IEEE 802.11gn HT40 mode

The EUT had been tested under operating condition.

There are three channels have been tested as following :

Channel	Frequency (MHz)
Low	2422
Middle	2437
High	2452

IEEE 802.11gn HT40 mode : 13.5Mbps data rate (worst case) were chosen for full testing.



4. TEST METHODOLOGY

The tests documented in this report were performed in accordance with ANSI C63.10:2009 and FCC CFR 47, 15.207, 15.209, 15.247.

5. FACILITIES AND ACCREDITATION

5.1 FACILITIES

All measurement facilities used to collect the measurement data are located at

NO. 989-1 Wen Shan Rd., Shang Shan Village,
Qionglin Shiang Hsinchu County 30741, Taiwan, R.O.C

The sites are constructed in conformance with the requirements of ANSI C63.10:2009 and CISPR 22. All receiving equipment conforms to CISPR 16-1-1, CISPR 16-1-2, CISPR 16-1-3, CISPR 16-1-4, CISPR 16-1-5.

5.2 ACCREDITATIONS

Our laboratories are accredited and approved by the following approval agencies according to ISO/IEC 17025.

Taiwan	TAF
---------------	-----

The measuring facility of laboratories has been authorized or registered by the following approval agencies.

Canada	INDUSTRY CANADA
Japan	VCCI
Taiwan	BSMI
USA	FCC MRA

Copies of granted accreditation certificates are available for downloading from our web site, <http://www.ccsrf.com>

Remark: FCC Designation Number TW1027.



5.3 MEASUREMENT UNCERTAINTY

The following table is for the measurement uncertainty, which is calculated as per the document CISPR 16-4-2.

PARAMETER	UNCERTAINTY
Semi Anechoic Chamber (966 Chamber_B) / Radiated Emission, 30 to 1000 MHz	+/- 3.97
Semi Anechoic Chamber (966 Chamber_B) / Radiated Emission, 1 to 18GHz	+/- 3.58
Semi Anechoic Chamber (966 Chamber_B) / Radiated Emission, 18 to 26 GHz	+/- 3.59
Semi Anechoic Chamber (966 Chamber_B) / Radiated Emission, 26 to 40 GHz	+/- 3.81
Conducted Emission (Mains Terminals), 9kHz to 30MHz	+/- 2.48

This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of $k=2$.

Consistent with industry standard (e.g. CISPR 22, clause 11, Measurement Uncertainty) determining compliance with the limits shall be based on the results of the compliance measurement. Consequently the measured emissions being less than the maximum allowed emission result in this being a compliant test or passing test.

The acceptable measurement uncertainty value without requiring revision of the compliance statement is based on conducted and radiated emissions being less than U_{CISPR} which is 3.6dB and 5.2dB respectively. CCS values (called U_{Lab} in CISPR 16-4-2) is less than U_{CISPR} as shown in the table above. Therefore, MU need not be considered for compliance.



6. SETUP OF EQUIPMENT UNDER TEST

SUPPORT EQUIPMENT

No.	Product	Manufacturer	Model No.	Serial No.
1	PC	IBM (Lenovo)	ThinkCentre AG5	L3C8189
2	Notebook PC	IBM (Lenovo)	ThinkPad T61 7663-AS6	L3F3864
3	Notebook PC	HP	ProBook 4421s	CNF03242PM
4	TEL-01	Telephone	ROMEO	TC-215
5	TEL-02	Telephone	ROMEO	TC-215
6	USB Flash disk	Transcend	Jet Flash V10(4G)	258909 0094
7	Switch Hub -For Load	ASUS	GX1008B	90-Q872AN1N0NAMA0-88QSA1 003522

No.	Power & Signal Cable Description
1	Non-shielded RJ-45 cable, 10m × 2
2	Non-shielded RJ-45 cable, 1.2m × 3
3	Non-shielded RJ-11 cable, 1.2m × 2

SETUP DIAGRAM FOR TESTS

EUT & peripherals setup diagram is shown in appendix setup photos.

EUT OPERATING CONDITION

RF Mode :

1. EUT & peripherals setup diagram is shown in appendix setup photos.
2. NB set fixed ip, 192.168.1.x
3. In MS-DOS : telnet 192.168.1.254
4. Username : gongdaowuRd
5. Password : 5753268
6. key in brctl delif br0 ra0
7. key in ated
8. Run "Ralink QA Test Program for RT5x9x V1.0.7.3" software was used for testing.



RF Mode:

1. Set up all computers like the setup diagram.

(1) TX Mode:

- ⇒ **Tx Data Rate:** MCS=0; 1Mbps Bandwidth 20 (IEEE 802.11b mode)
MCS=0; 6Mbps Bandwidth 20 (IEEE 802.11g mode)
MCS=0; 6.5Mbps Bandwidth 20 (IEEE 802.11gn HT20 mode)
MCS=0; 13.5Mbps Bandwidth 40 (IEEE 802.11gn HT40 mode)

⇒ **Power control**

IEEE 802.11b Channel Low (2412MHz) TX Power0/1 1D/1D
IEEE 802.11b Channel Mid (2437MHz) TX Power0/1 20/20
IEEE 802.11b Channel High (2462MHz) TX Power0/1 20/20
IEEE 802.11g Channel Low (2412MHz) TX Power0/1 19/19
IEEE 802.11g Channel Mid (2437MHz) TX Power0/1 1C/1C
IEEE 802.11g Channel High (2462MHz) TX Power0/1 1B/1B
IEEE 802.11gn HT20 Channel Low (2412MHz) TX Power0/1 1A/1A
IEEE 802.11gn HT20 Channel Mid (2437MHz) TX Power0/1 17/17
IEEE 802.11gn HT20 Channel High (2462MHz) TX Power0/1 13/13
IEEE 802.11gn HT40 Channel Low (2422MHz) TX Power0/1 13/13
IEEE 802.11gn HT40 Channel Mid (2437MHz) TX Power0/1 17/17
IEEE 802.11gn HT40 Channel High (2452MHz) TX Power0/1 13/13

9. All of the functions are under run.

10. Start test.

Normal Mode :

1. EUT & peripherals setup diagram is shown in appendix setup photos.
2. Power on all equipments.
3. Notebook PC ping EUT IP 192.168.2.1 through WAN connected by RJ-45 cable.
4. PC ping EUT IP 192.168.1.254 through LAN connected by RJ-45 cable.
5. Notebook PC ping EUT IP 192.168.1.254 through wireless LAN.
6. LAN 2~4 port link ethernet switch load.
7. USB port link USB flash disk load.
8. All of the functions are under run.
9. Start test.



7. FCC PART 15.247 REQUIREMENTS

7.1 6dB BANDWIDTH

LIMITS

§ 15.247(a) (2) For direct sequence systems, the minimum 6dB bandwidth shall be at least 500kHz.

TEST EQUIPMENT

Name of Equipment	Manufacturer	Model	Serial Number	Calibration Due
Spectrum Analyzer	Agilent	E4446A	MY43360132	06/10/2015

Remark: Each piece of equipment is scheduled for calibration once a year.

TEST SETUP



TEST PROCEDURE

1. The transmitter output was connected to a spectrum analyzer.
2. Set RBW = 100 kHz.
3. Set the video bandwidth (VBW) $\geq 3 \times$ RBW.
4. Detector = Peak.
5. Trace mode = max hold.
6. Sweep = auto couple.
7. Allow the trace to stabilize.
8. Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

**TEST RESULTS****IEEE 802.11b Mode (Two TX)**

Channel	Channel Frequency (MHz)	6dB Bandwidth (MHz)		Minimum Limit (kHz)	Pass / Fail
		Chain 0	Chain 1		
Low	2412	10.140	10.135	500	PASS
Middle	2437	10.140	10.140	500	PASS
High	2462	10.150	10.140	500	PASS

IEEE 802.11g Mode (Two TX)

Channel	Channel Frequency (MHz)	6dB Bandwidth (MHz)		Minimum Limit (kHz)	Pass / Fail
		Chain 0	Chain 1		
Low	2412	16.455	16.460	500	PASS
Middle	2437	16.440	16.450	500	PASS
High	2462	16.465	16.450	500	PASS

IEEE 802.11gn HT20 Mode (Two TX)


Channel	Channel Frequency (MHz)	6dB Bandwidth (MHz)		Minimum Limit (kHz)	Pass / Fail
		Chain 0	Chain 1		
Low	2412	17.575	17.570	500	PASS
Middle	2437	17.570	17.570	500	PASS
High	2462	17.575	17.580	500	PASS


IEEE 802.11gn HT40 Mode (Two TX)


Channel	Channel Frequency (MHz)	6dB Bandwidth (MHz)		Minimum Limit (kHz)	Pass / Fail
		Chain 0	Chain 1		
Low	2422	36.345	36.335	500	PASS
Middle	2437	36.355	36.345	500	PASS
High	2452	36.345	36.345	500	PASS





6dB BANDWIDTH

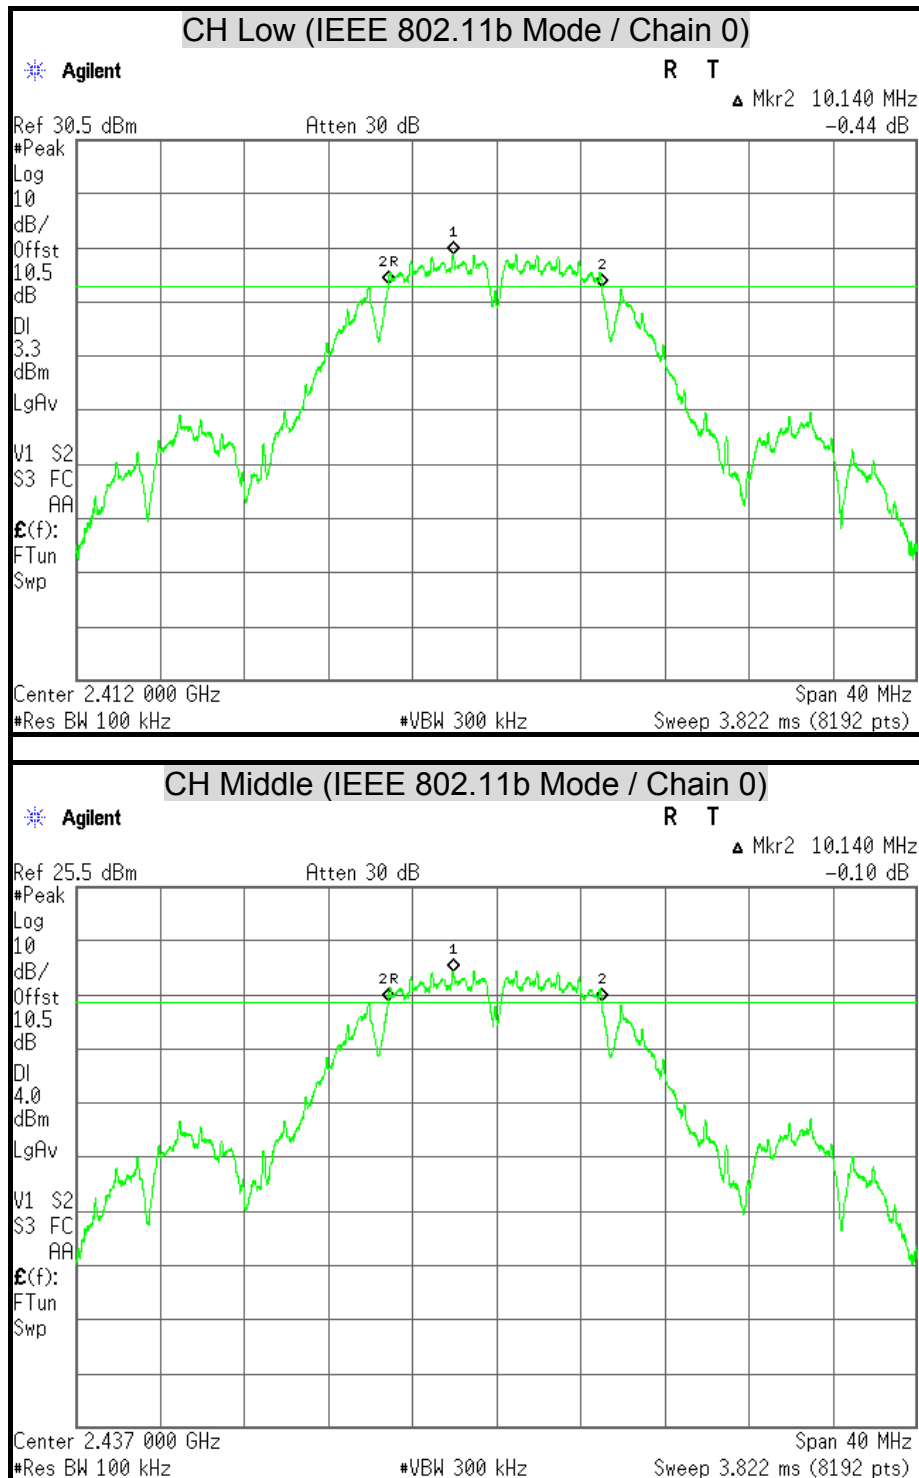


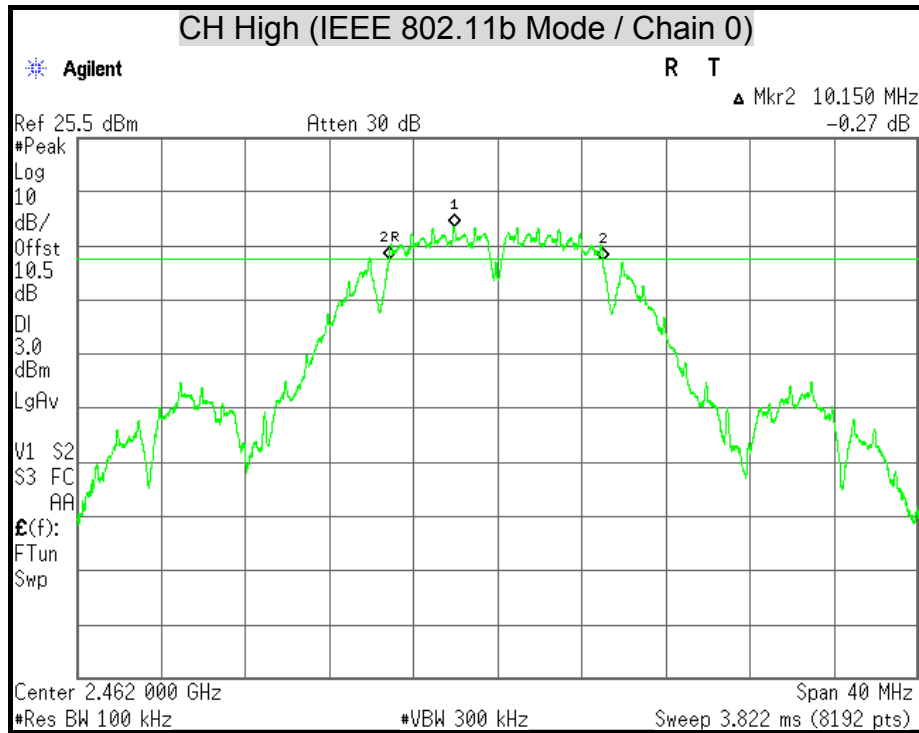


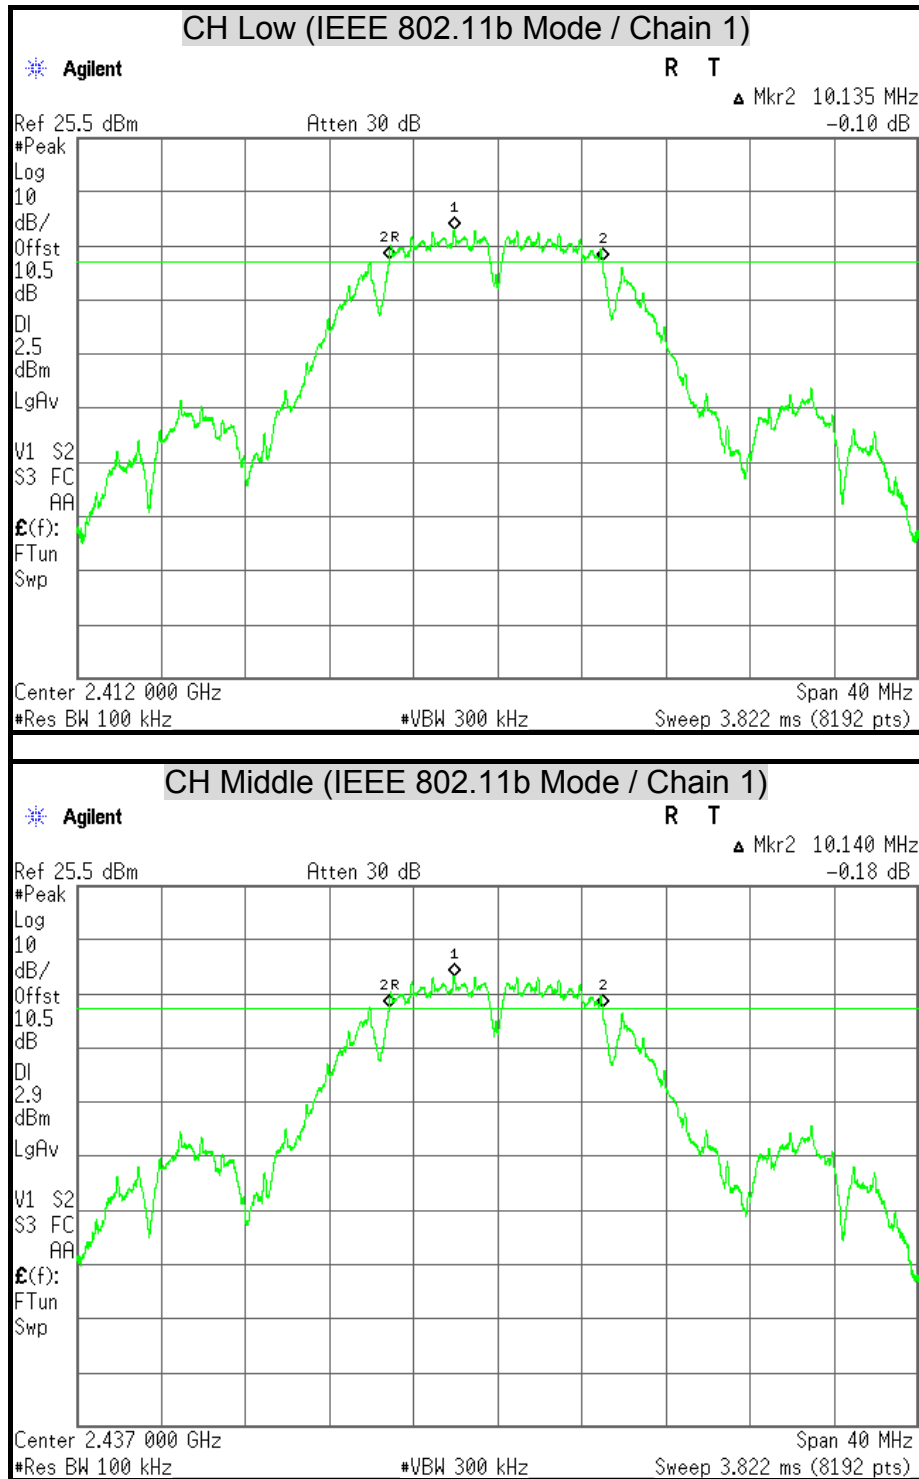


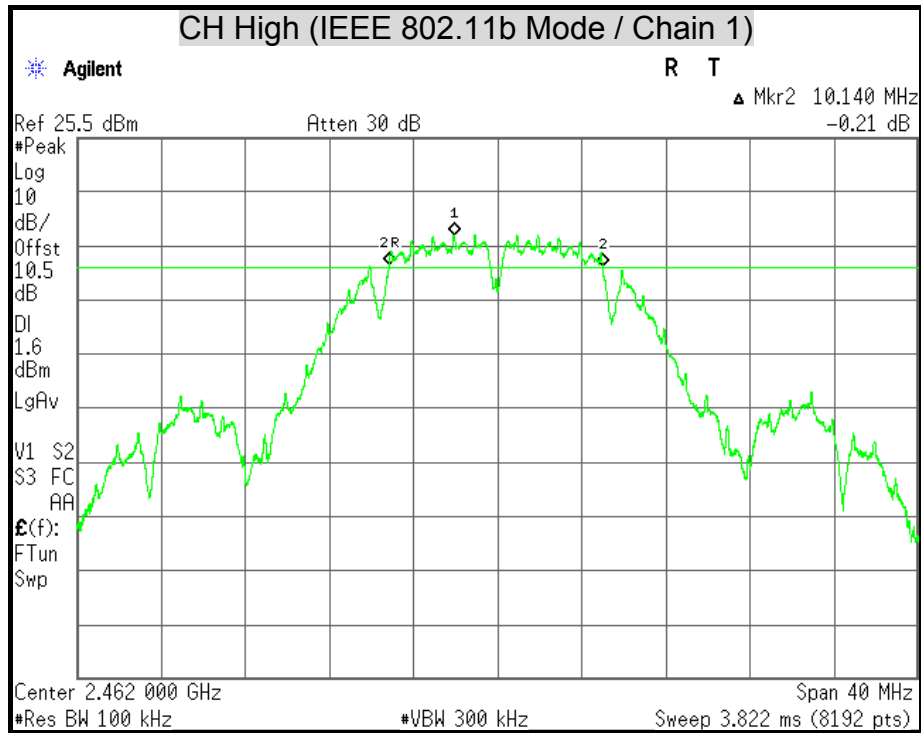


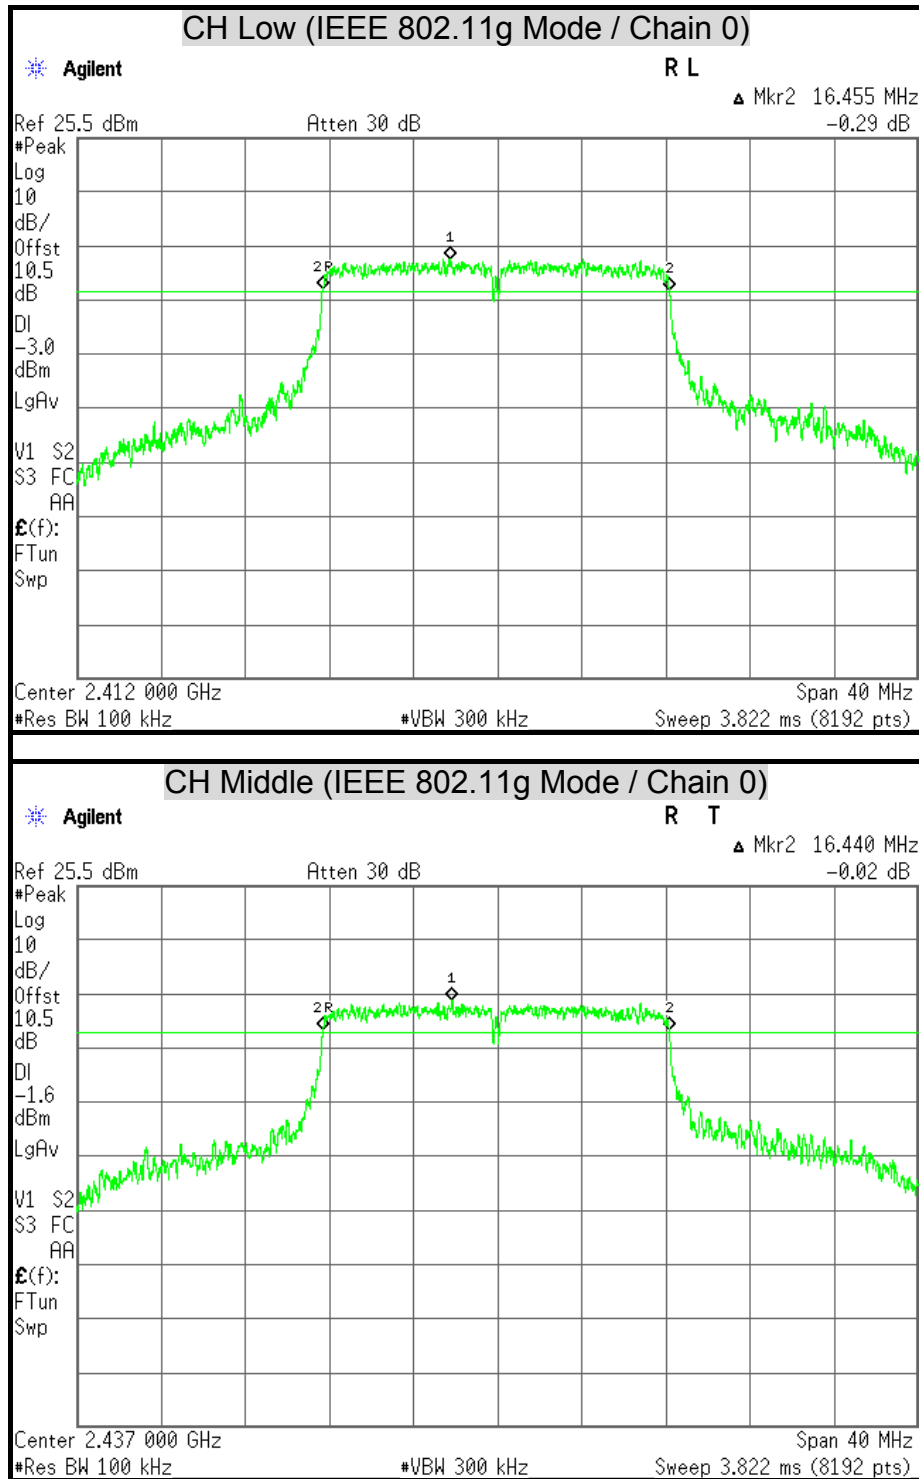


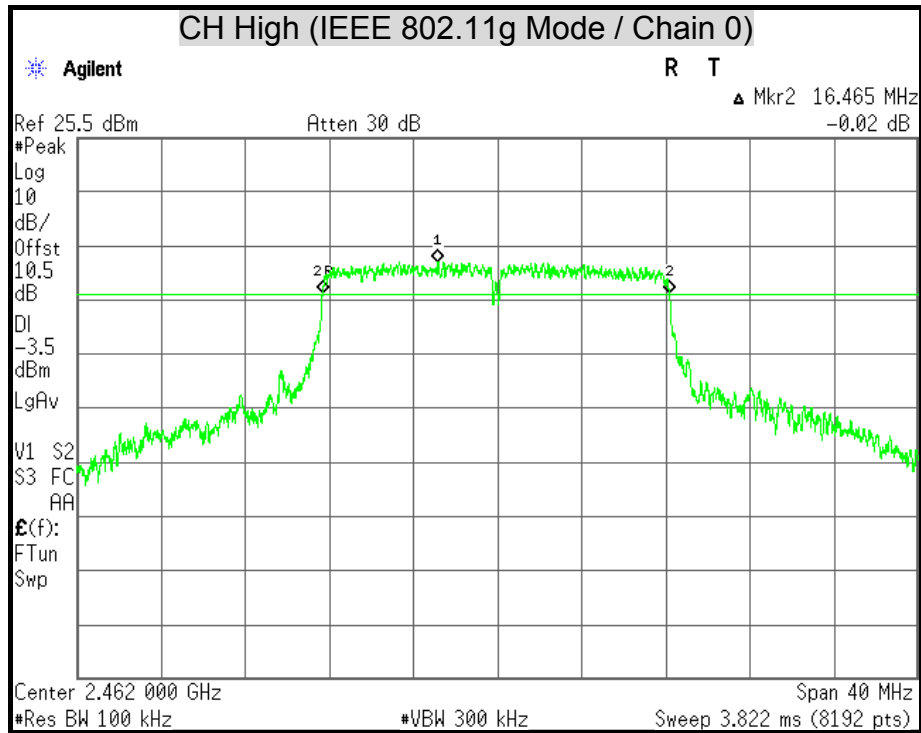


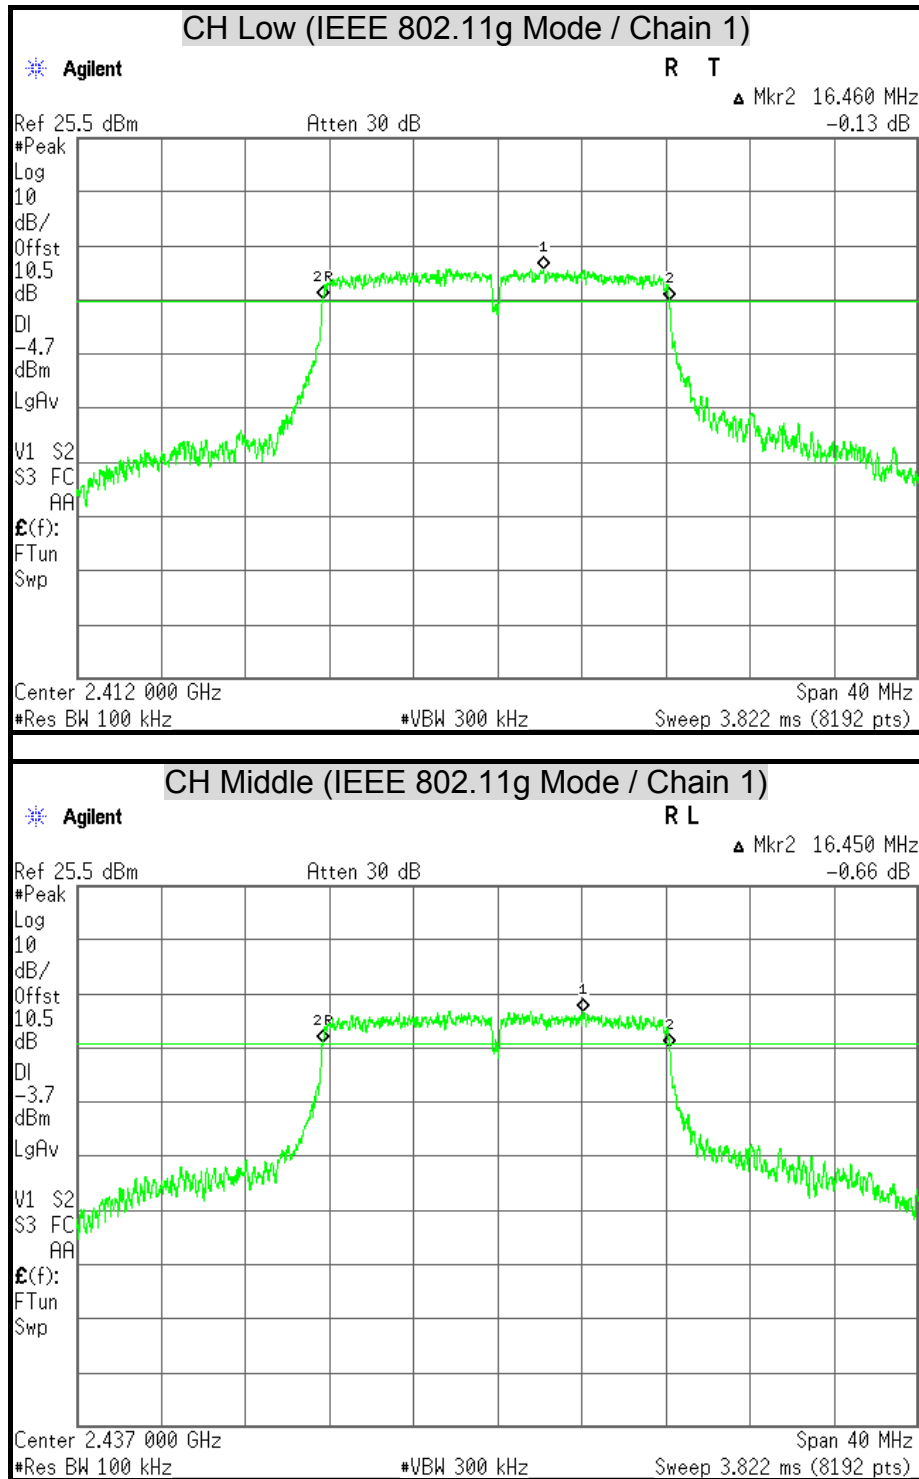


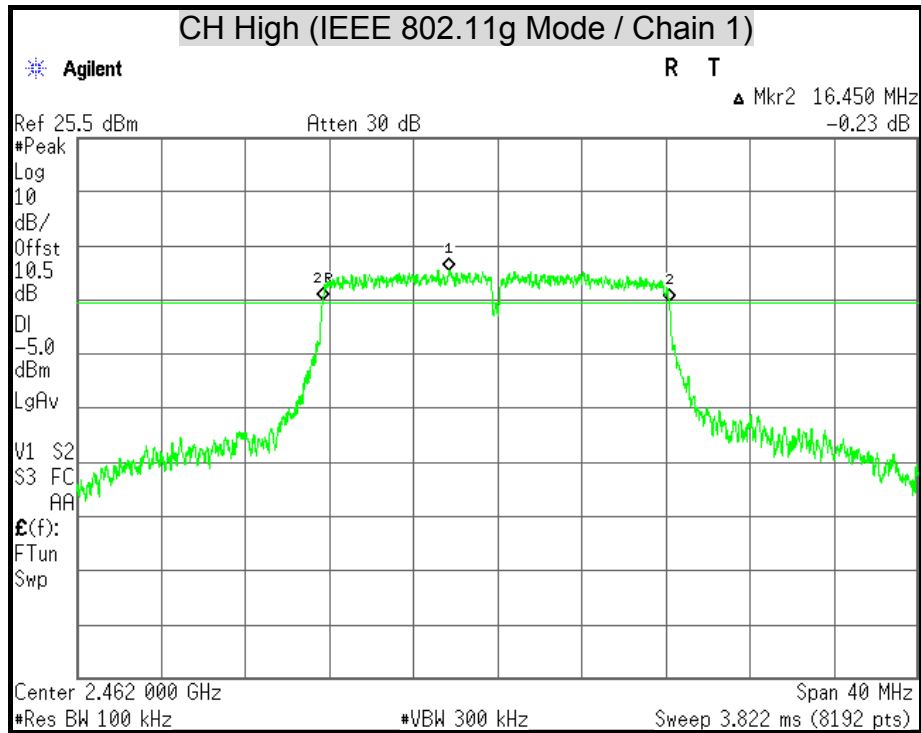


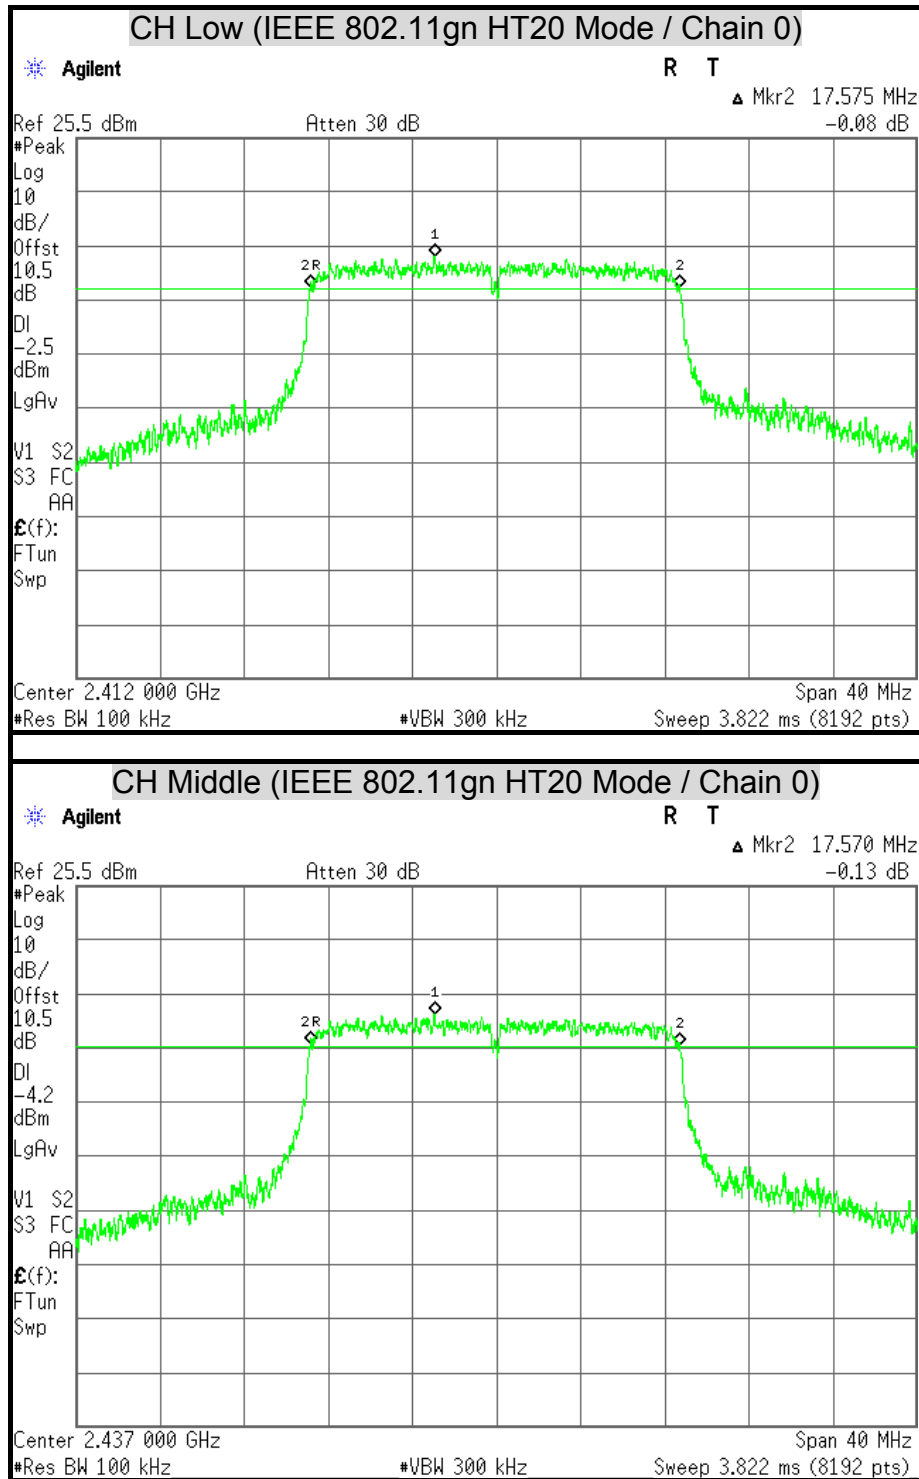


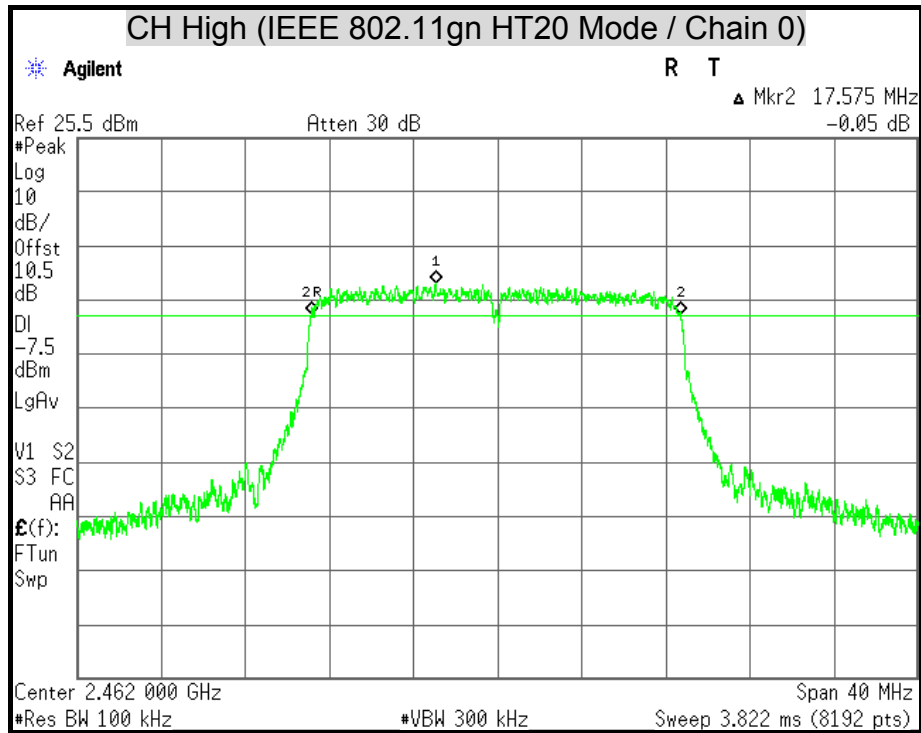


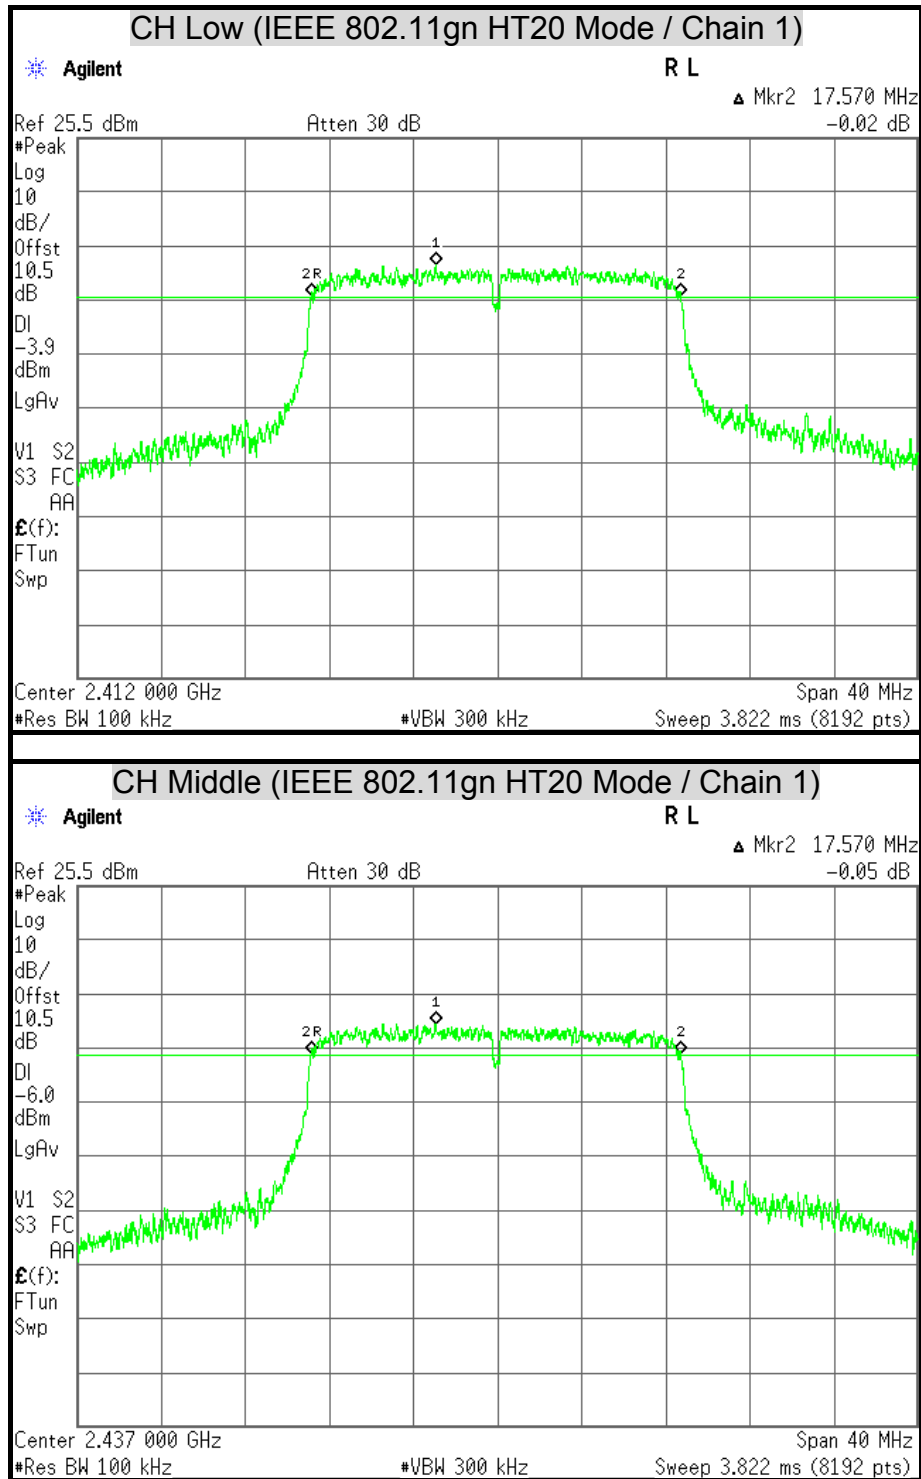


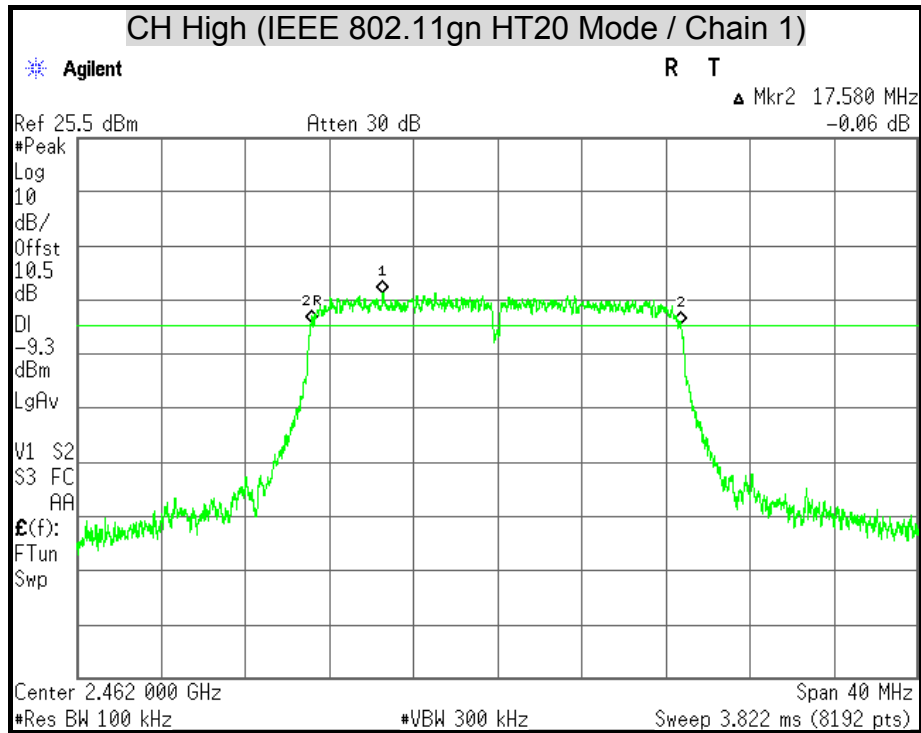

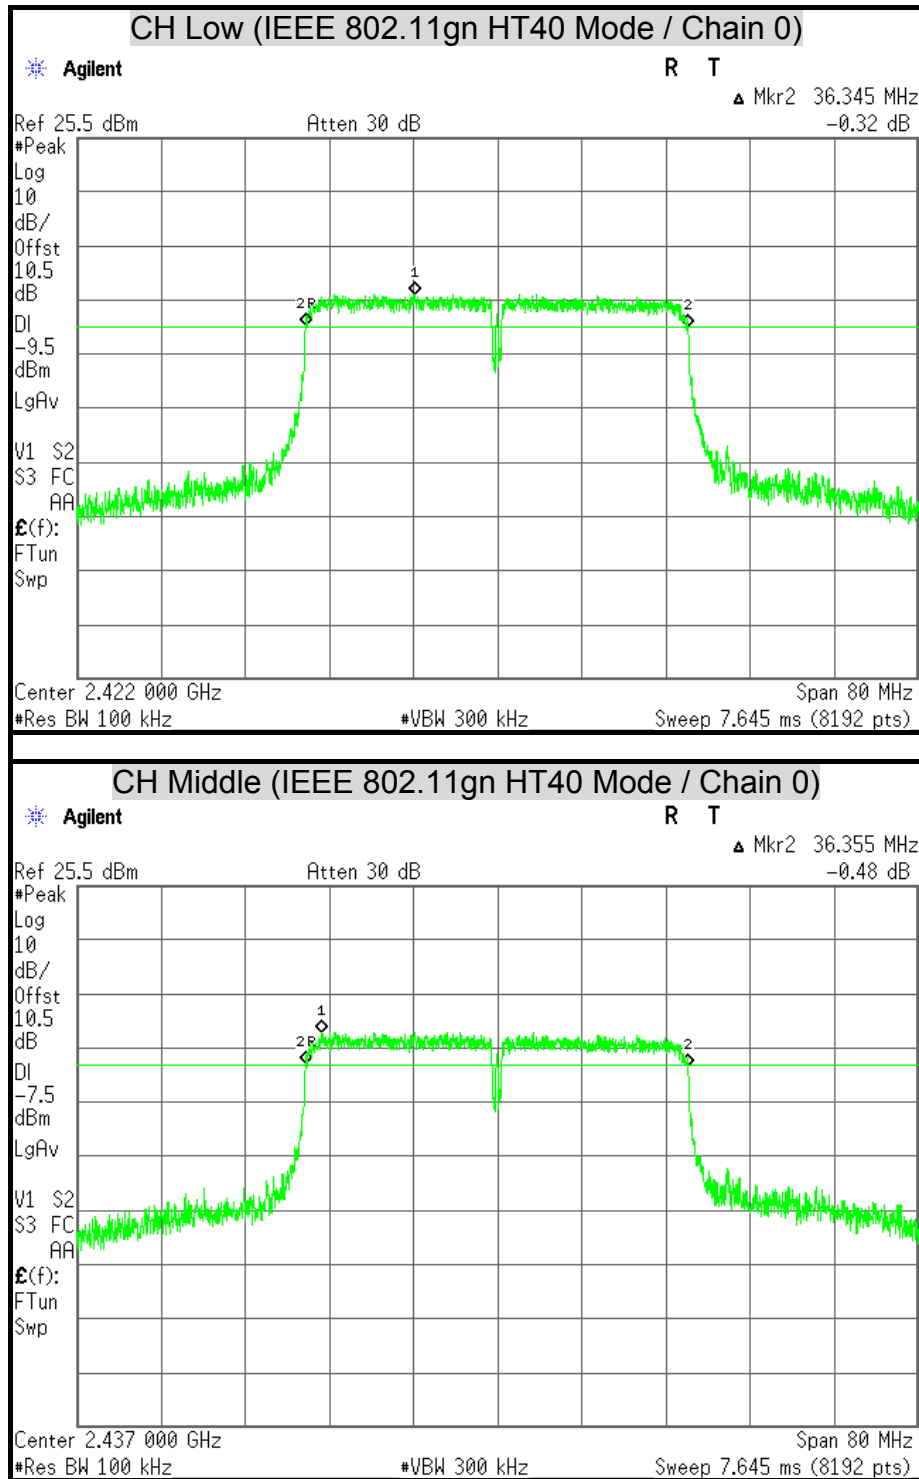

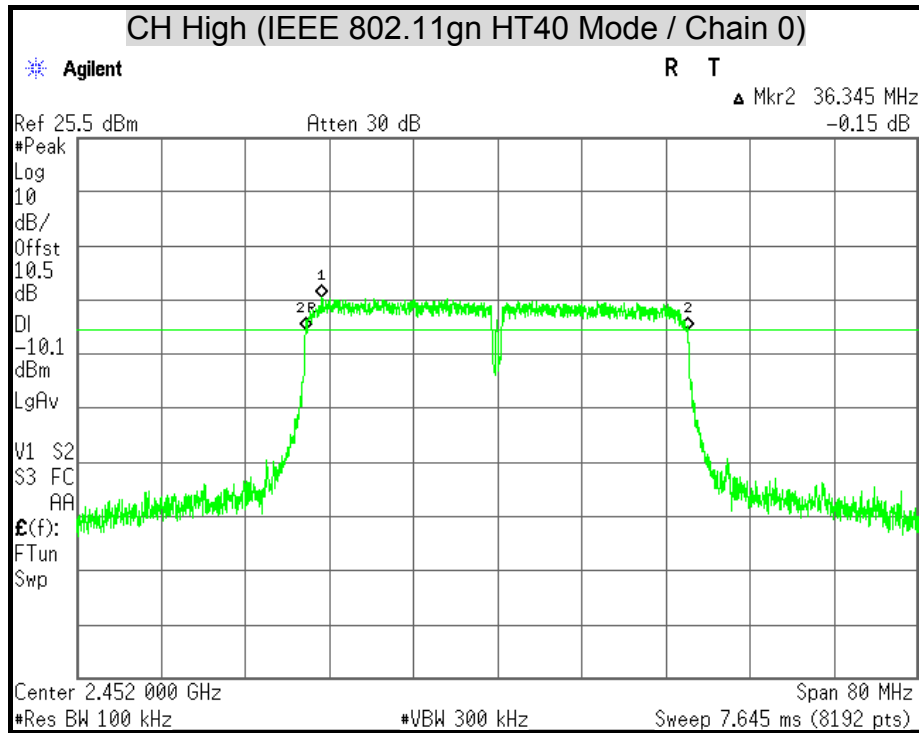

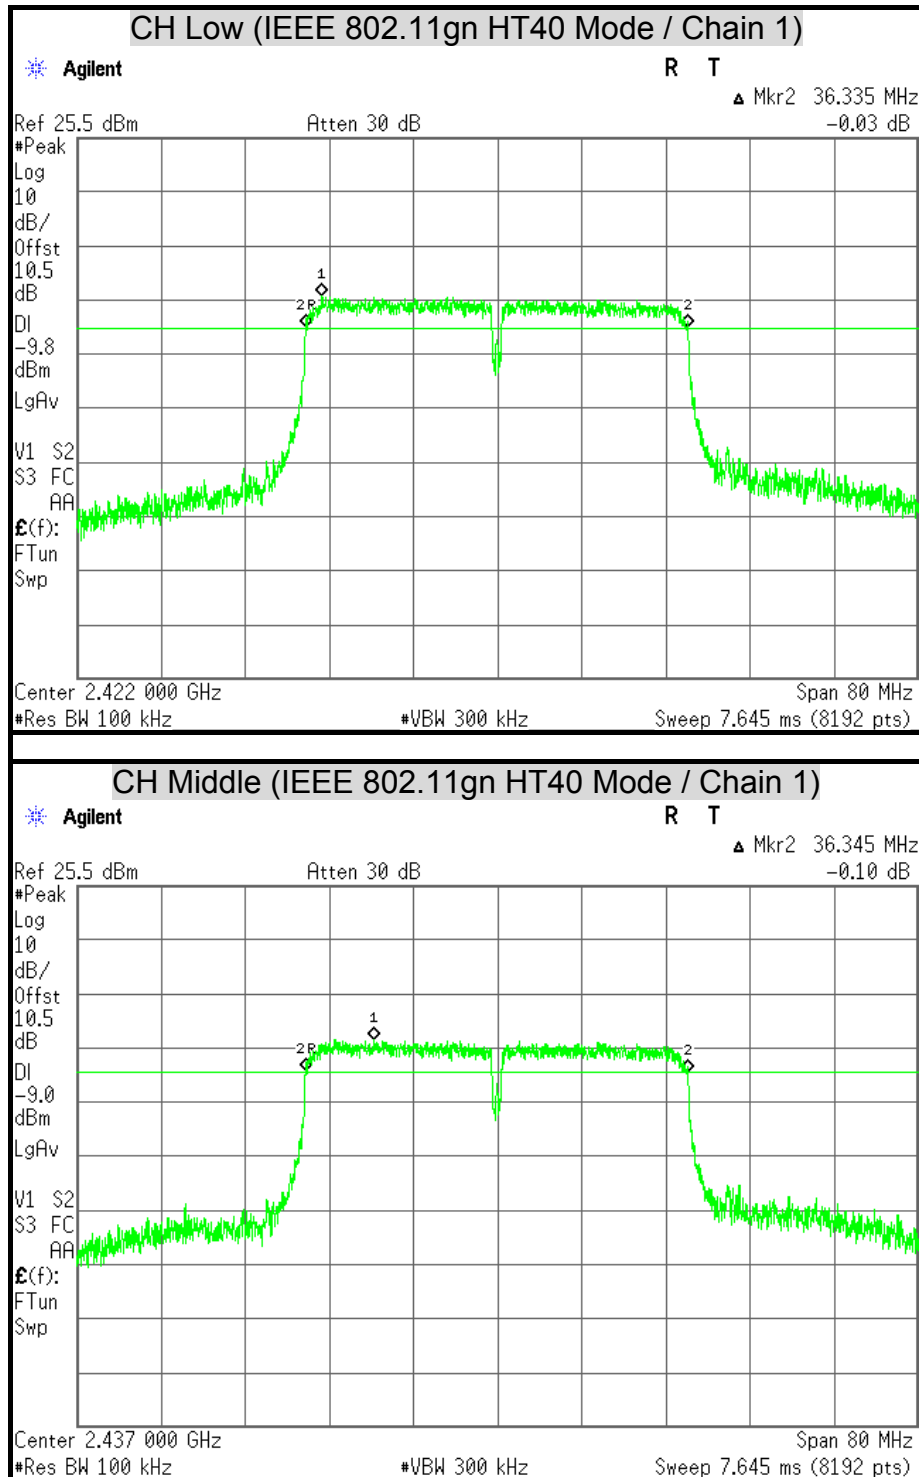

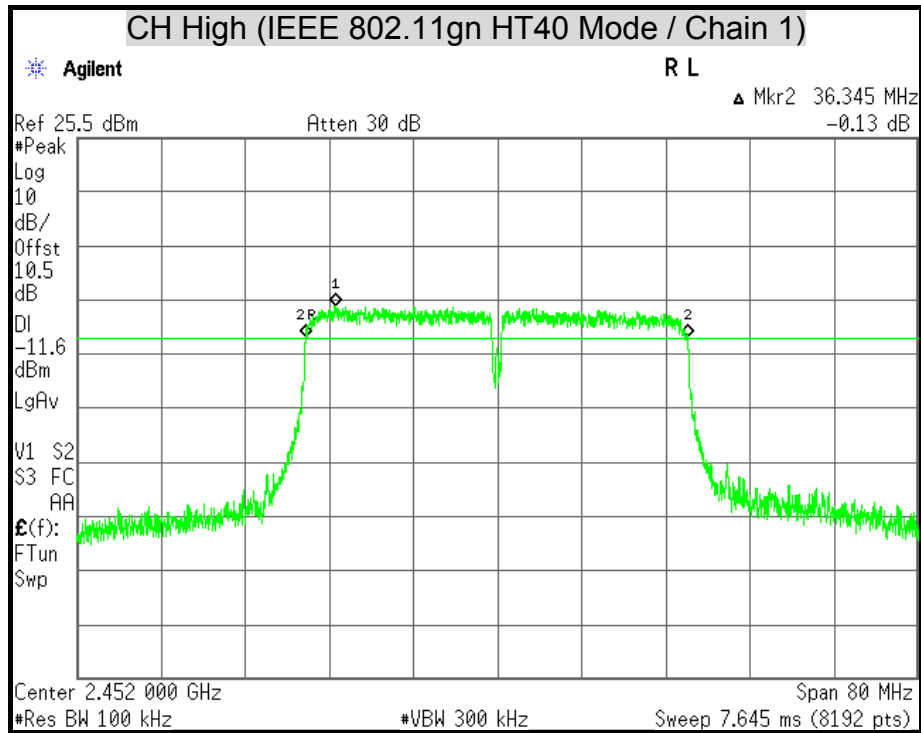



7.2 MAXIMUM PEAK OUTPUT POWER

LIMITS

§ 15.247(b) The maximum peak output power of the intentional radiator shall not exceed the following :

§ 15.247(b) (3) For systems using digital modulation in the 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz bands : 1 watt.

§ 15.247(b) (4) Except as shown in paragraphs (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used the peak output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1) or (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

TEST EQUIPMENT

Name of Equipment	Manufacturer	Model	Serial Number	Calibration Due
Power Meter	ANRITSU	ML2495A	1149001	12/06/2014
Power Sensor	ANRITSU	MA2411B	1126148	12/06/2014

Remark: Each piece of equipment is scheduled for calibration once a year.

TEST SETUP



TEST PROCEDURE

The transmitter output is connected to the power meter. The power meter is set to the peak power detection.

**TEST RESULTS****IEEE 802.11b Mode (Two TX)**

Channel	Channel Frequency (MHz)	Peak Power (dBm)		Peak Power Total		Peak Power Limit		Pass / Fail
		Chain 0	Chain 1	(dBm)	(W)	(dBm)	(W)	
Low	2412	22.11	21.87	25.00	0.3161	30	1	PASS
Middle	2437	22.63	22.15	25.41	0.3473	30	1	PASS
High	2462	21.63	21.17	24.42	0.2765	30	1	PASS

Remark:

1. At final test to get the worst-case emission at 1Mbps.
2. The cable assembly insertion loss of 10.5dB (including 10 dB pad and 0.5 dB cable) was Entered as an offset in the power meter to allow for direct reading of power.
3. The Directional gain = GANT + Array Gain = 5.37dBi which is less than 6dBi, the limit should be 1W.
4. Total peak power = Chain 0 + Chain 1.

IEEE 802.11g Mode (Two TX)

Channel	Channel Frequency (MHz)	Peak Power (dBm)		Peak Power Total		Peak Power Limit		Pass / Fail
		Chain 0	Chain 1	(dBm)	(W)	(dBm)	(W)	
Low	2412	23.03	22.39	25.73	0.3744	30	1	PASS
Middle	2437	23.81	23.19	26.52	0.4488	30	1	PASS
High	2462	22.24	21.84	25.06	0.3205	30	1	PASS

Remark:

1. At final test to get the worst-case emission at 6Mbps.
2. The cable assembly insertion loss of 10.5dB (including 10 dB pad and 0.5 dB cable) was Entered as an offset in the power meter to allow for direct reading of power.
3. The Directional gain = GANT + Array Gain = 5.37dBi which is less than 6dBi, the limit should be 1W.
4. Total peak power = Chain 0 + Chain 1.

**IEEE 802.11gn HT20 Mode (Two TX)**

Channel	Channel Frequency (MHz)	Peak Power (dBm)		Peak Power Total		Peak Power Limit		Pass / Fail
		Chain 0	Chain 1	(dBm)	(W)	(dBm)	(W)	
Low	2412	23.49	22.94	26.23	0.4201	30	1	PASS
Middle	2437	21.61	21.11	24.38	0.2742	30	1	PASS
High	2462	18.61	18.03	21.34	0.1360	30	1	PASS

Remark:

1. At final test to get the worst-case emission at 6.5Mbps.
2. The cable assembly insertion loss of 10.5dB (including 10 dB pad and 0.5 dB cable) was Entered as an offset in the power meter to allow for direct reading of power.
3. The Directional gain = GANT + Array Gain = 5.37dBi which is less than 6dBi, the limit should be 1W.
4. Total peak power = Chain 0 + Chain 1.

IEEE 802.11gn HT40 Mode (Two TX)

Channel	Channel Frequency (MHz)	Peak Power (dBm)		Peak Power Total		Peak Power Limit		Pass / Fail
		Chain 0	Chain 1	(dBm)	(W)	(dBm)	(W)	
Low	2422	20.07	19.75	22.92	0.1960	30	1	PASS
Middle	2437	21.57	21.09	24.35	0.2721	30	1	PASS
High	2452	19.21	18.40	21.83	0.1526	30	1	PASS

Remark:

1. At final test to get the worst-case emission at 13.5Mbps.
2. The cable assembly insertion loss of 10.5dB (including 10 dB pad and 0.5 dB cable) was Entered as an offset in the power meter to allow for direct reading of power.
3. The Directional gain = GANT + Array Gain = 5.37dBi which is less than 6dBi, the limit should be 1W.
4. Total peak power = Chain 0 + Chain 1.



7.3 AVERAGE POWER

LIMITS

None; for reporting purposes only.

TEST EQUIPMENT

Name of Equipment	Manufacturer	Model	Serial Number	Calibration Due
Power Meter	ANRITSU	ML2495A	1149001	12/06/2014
Power Sensor	ANRITSU	MA2411B	1126148	12/06/2014

Remark: Each piece of equipment is scheduled for calibration once a year.

TEST SETUP



TEST PROCEDURE

The transmitter output is connected to the power meter. The power meter is set to the average power detection.

**TEST RESULTS****IEEE 802.11b Mode (Two TX)**

Channel	Channel Frequency (MHz)	Average Power (dBm)	
		Chain 0	Chain 1
Low	2412	18.88	18.80
Middle	2437	19.32	19.05
High	2462	18.29	18.08

Remark:

1. At final test to get the worst-case emission at 1Mbps.
2. The cable assembly insertion loss of 10.5 dB (including 10 dB pad and 0.5 dB cable) was Entered as an offset in the power meter to allow for direct reading of power.

IEEE 802.11g Mode (Two TX)

Channel	Channel Frequency (MHz)	Average Power (dBm)	
		Chain 0	Chain 1
Low	2412	15.84	15.34
Middle	2437	16.64	16.10
High	2462	15.18	14.79

Remark:

1. At final test to get the worst-case emission at 6Mbps.
2. The cable assembly insertion loss of 10.5 dB (including 10 dB pad and 0.5 dB cable) was Entered as an offset in the power meter to allow for direct reading of power.

**IEEE 802.11gn HT20 Mode (Two TX)**

Channel	Channel Frequency (MHz)	Average Power (dBm)	
		Chain 0	Chain 1
Low	2412	16.06	15.63
Middle	2437	14.23	13.80
High	2462	11.18	10.66

Remark:

1. At final test to get the worst-case emission at 6.5Mbps.
2. The cable assembly insertion loss of 10.5 dB (including 10 dB pad and 0.5 dB cable) was Entered as an offset in the power meter to allow for direct reading of power.

IEEE 802.11gn HT40 Mode (Two TX)

Channel	Channel Frequency (MHz)	Average Power (dBm)	
		Chain 0	Chain 1
Low	2422	12.85	12.49
Middle	2437	14.47	14.01
High	2452	11.98	11.31

Remark:

1. At final test to get the worst-case emission at 13.5Mbps.
2. The cable assembly insertion loss of 10.5 dB (including 10 dB pad and 0.5 dB cable) was Entered as an offset in the power meter to allow for direct reading of power.



7.4 POWER SPECTRAL DENSITY

LIMITS

§ 15.247(e) For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.

TEST EQUIPMENT

Name of Equipment	Manufacturer	Model	Serial Number	Calibration Due
Spectrum Analyzer	Agilent	E4446A	MY43360132	06/10/2015

Remark: Each piece of equipment is scheduled for calibration once a year.

TEST SETUP



TEST PROCEDURE

1. The transmitter output was connected to the spectrum analyzer.
2. Set analyzer center frequency to DTS channel center frequency.
3. Set the span to 1.5 times the DTS channel bandwidth.
4. Set the RBW to: $3 \text{ kHz} \leq \text{RBW} \leq 100 \text{ kHz}$.
5. Set the VBW $\geq 3 \times \text{RBW}$.
6. Detector = peak.
7. Sweep time = auto couple.
8. Trace mode = max hold.
9. Allow trace to fully stabilize.
10. Use the peak marker function to determine the maximum amplitude level within the RBW.
11. If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.

**TEST RESULTS****IEEE 802.11b Mode (Two TX)**

Channel	Channel Frequency (MHz)	Final RF Power Level in 3KHz BW (dBm)		PSD Total (dBm)	Minimum Limit (dBm)	Pass / Fail
		Chain 0	Chain 1			
Low	2412	-5.66	-10.23	-4.36	8	PASS
Middle	2437	-4.93	-10.04	-3.76	8	PASS
High	2462	-5.91	-11.20	-4.78	8	PASS

Remark:

1. At final test to get the worst-case emission at 1Mbps.
2. The cable assembly insertion loss of 10.5dB (including 10 dB pad and 0.5 dB cable) was Entered as an offset in the spectrum analyzer to allow for direct reading of power.
3. The Directional gain = GANT + Array Gain = 5.37dBi which is less than 6dBi, the limit should be 8dBm.
4. Total power spectral density = Chain 0 + Chain 1.

IEEE 802.11g Mode (Two TX)

Channel	Channel Frequency (MHz)	Final RF Power Level in 3KHz BW (dBm)		PSD Total (dBm)	Minimum Limit (dBm)	Pass / Fail
		Chain 0	Chain 1			
Low	2412	-5.12	-11.93	-4.30	8	PASS
Middle	2437	-3.80	-10.94	-3.03	8	PASS
High	2462	-6.53	-13.22	-5.69	8	PASS

Remark:

1. At final test to get the worst-case emission at 6Mbps.
2. The cable assembly insertion loss of 10.5dB (including 10 dB pad and 0.5 dB cable) was Entered as an offset in the spectrum analyzer to allow for direct reading of power.
3. The Directional gain = GANT + Array Gain = 5.37dBi which is less than 6dBi, the limit should be 8dBm.
4. Total power spectral density = Chain 0 + Chain 1.

**IEEE 802.11gn HT20 Mode (Two TX)**

Channel	Channel Frequency (MHz)	Final RF Power Level in 3KHz BW (dBm)		PSD Total (dBm)	Minimum Limit (dBm)	Pass / Fail
		Chain 0	Chain 1			
Low	2412	-5.33	-11.48	-4.39	8	PASS
Middle	2437	-7.75	-13.52	-6.73	8	PASS
High	2462	-10.33	-16.80	-9.45	8	PASS

Remark:

1. At final test to get the worst-case emission at 6.5Mbps.
2. The cable assembly insertion loss of 10.5dB (including 10 dB pad and 0.5 dB cable) was Entered as an offset in the spectrum analyzer to allow for direct reading of power.
3. The Directional gain = GANT + Array Gain = 5.37dBi which is less than 6dBi, the limit should be 8dBm.
4. Total power spectral density = Chain 0 + Chain 1.

IEEE 802.11gn HT40 Mode (Two TX)


Channel	Channel Frequency (MHz)	Final RF Power Level in 3KHz BW (dBm)		PSD Total (dBm)	Minimum Limit (dBm)	Pass / Fail
		Chain 0	Chain 1			
Low	2422	-9.30	-15.36	-8.34	8	PASS
Middle	2437	-7.74	-14.87	-6.97	8	PASS
High	2452	-10.24	-17.35	-9.47	8	PASS


Remark:


1. At final test to get the worst-case emission at 13.5Mbps.
2. The cable assembly insertion loss of 10.5dB (including 10 dB pad and 0.5 dB cable) was Entered as an offset in the spectrum analyzer to allow for direct reading of power.
3. The Directional gain = GANT + Array Gain = 5.37dBi which is less than 6dBi, the limit should be 8dBm.
4. Total power spectral density = Chain 0 + Chain 1.





POWER SPECTRAL DENSITY

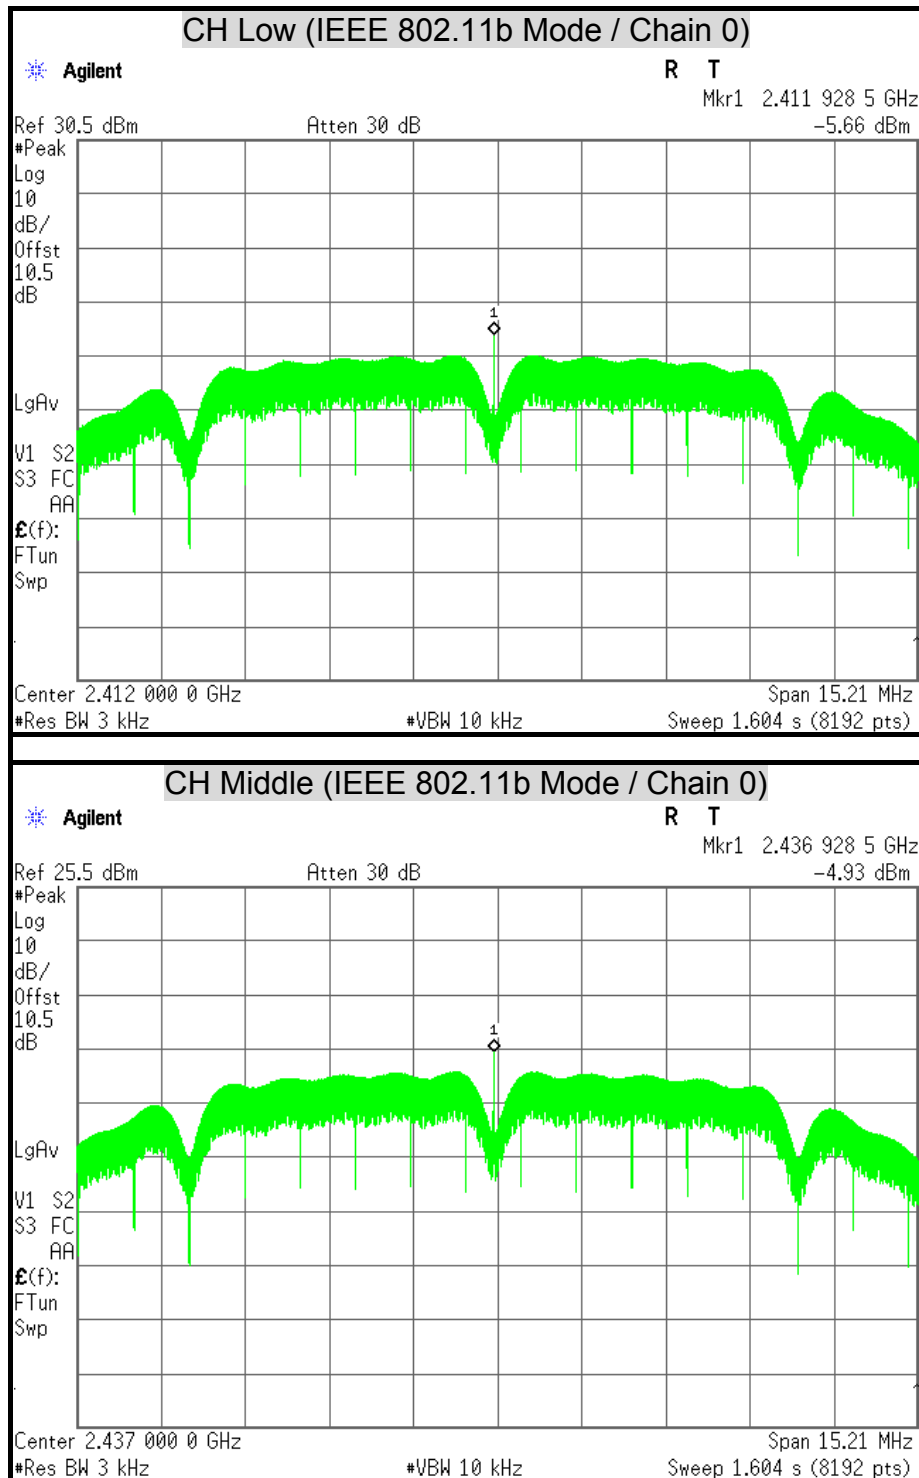


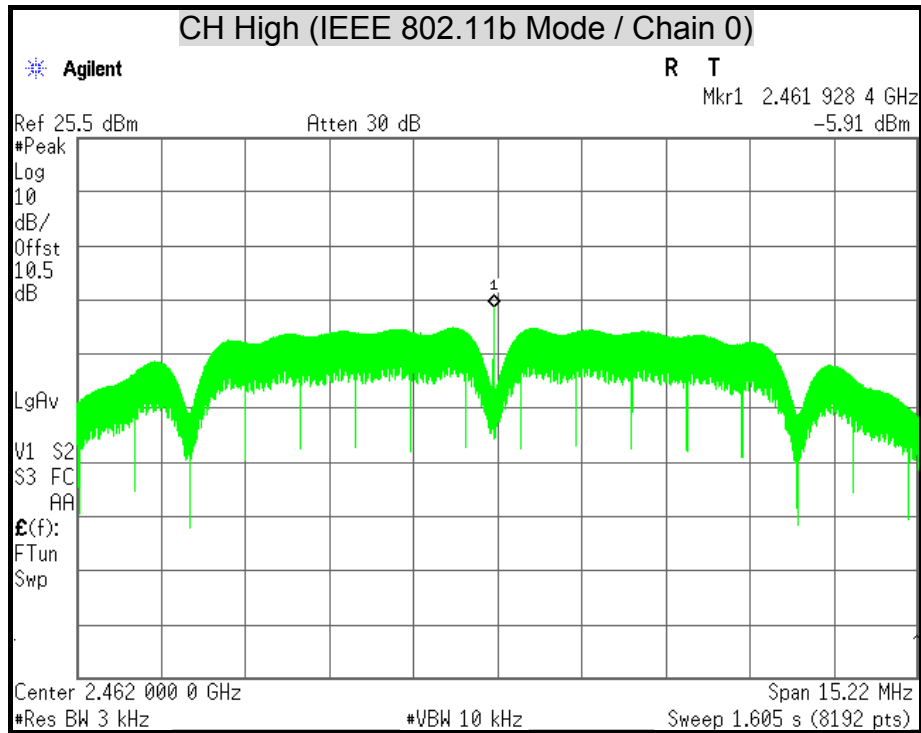


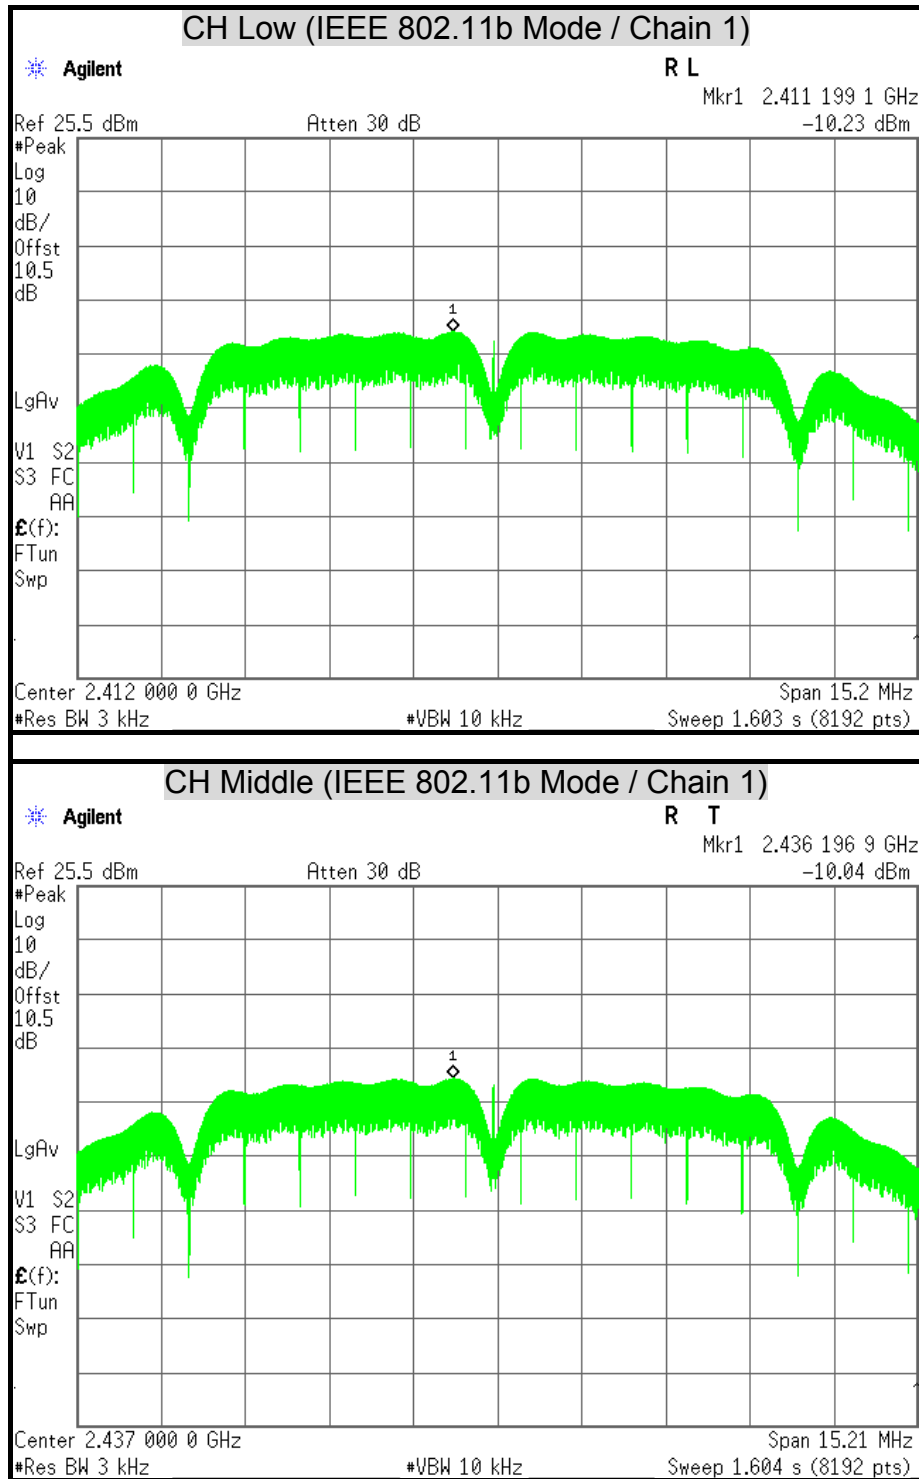


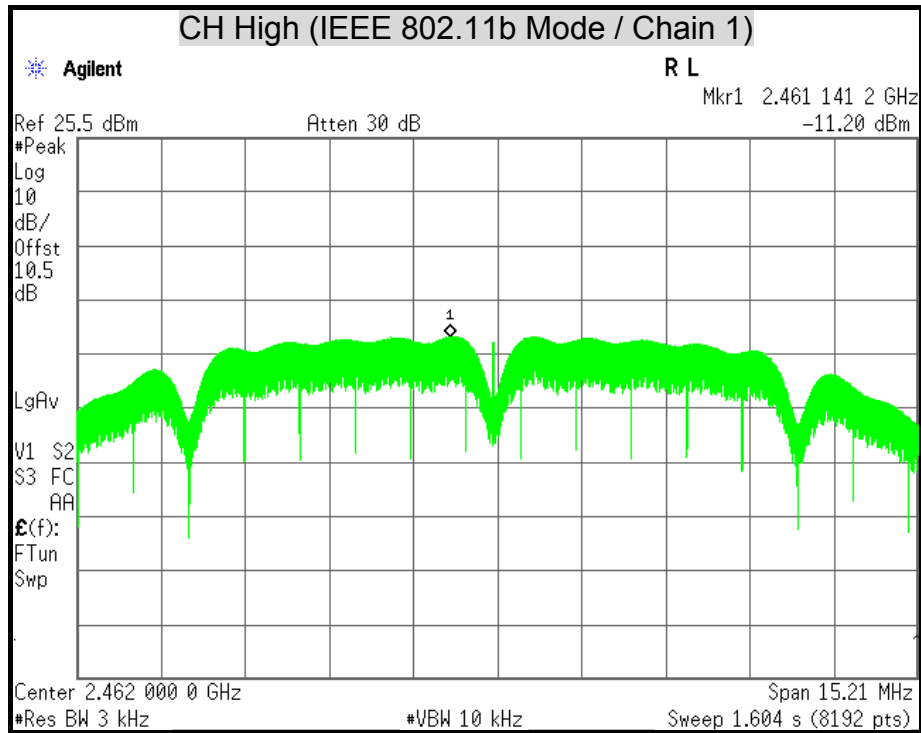


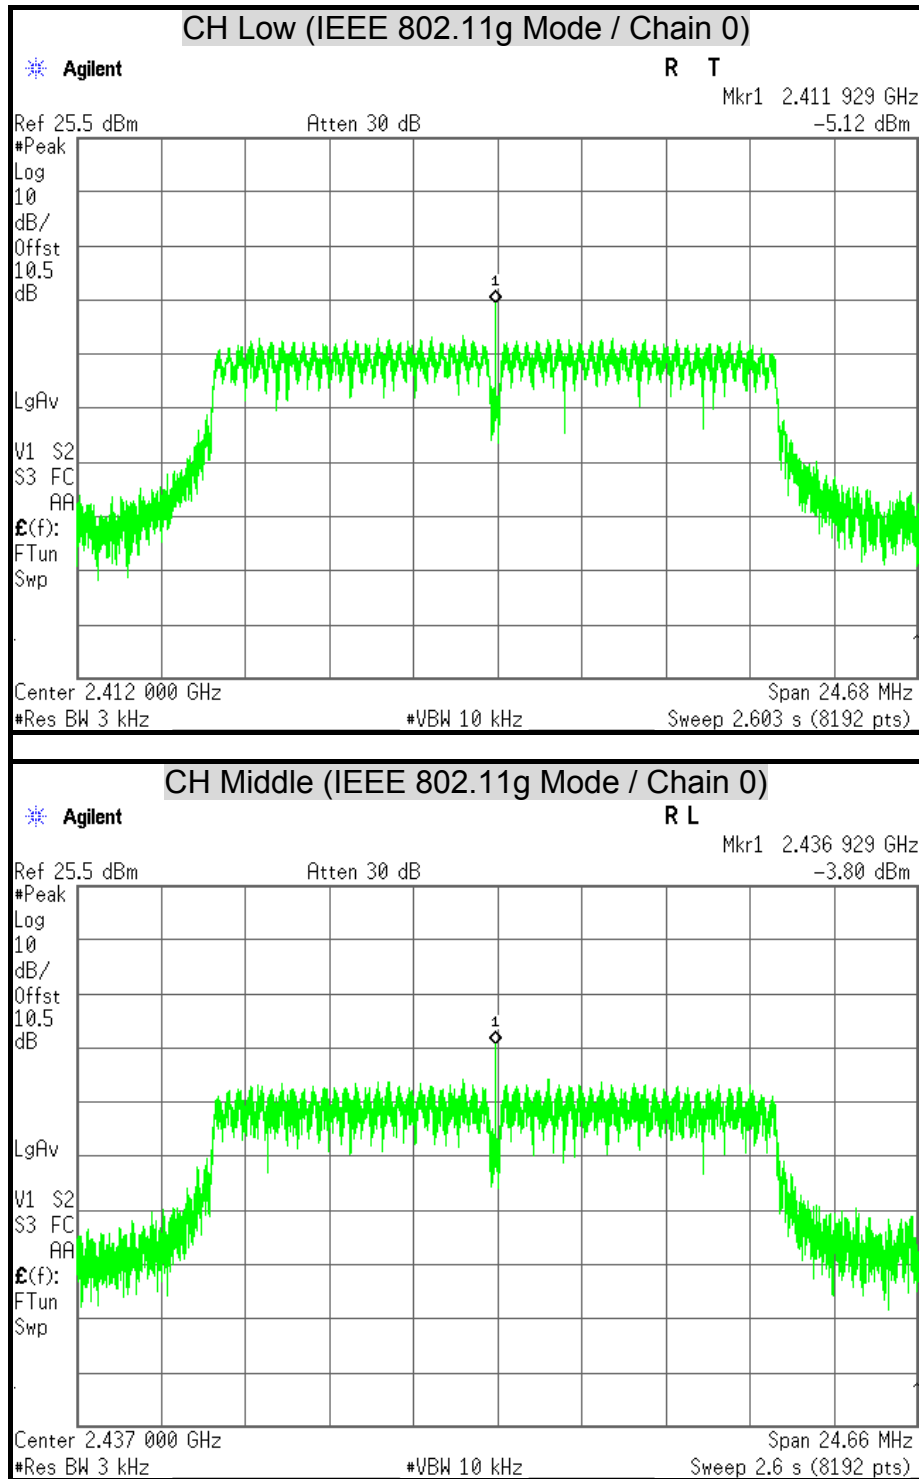


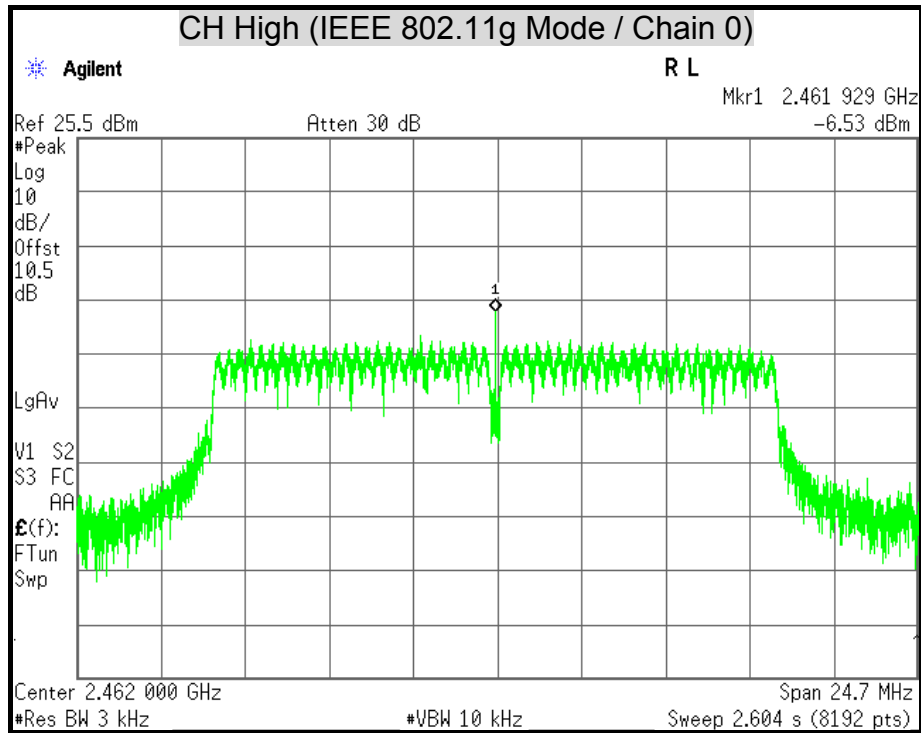


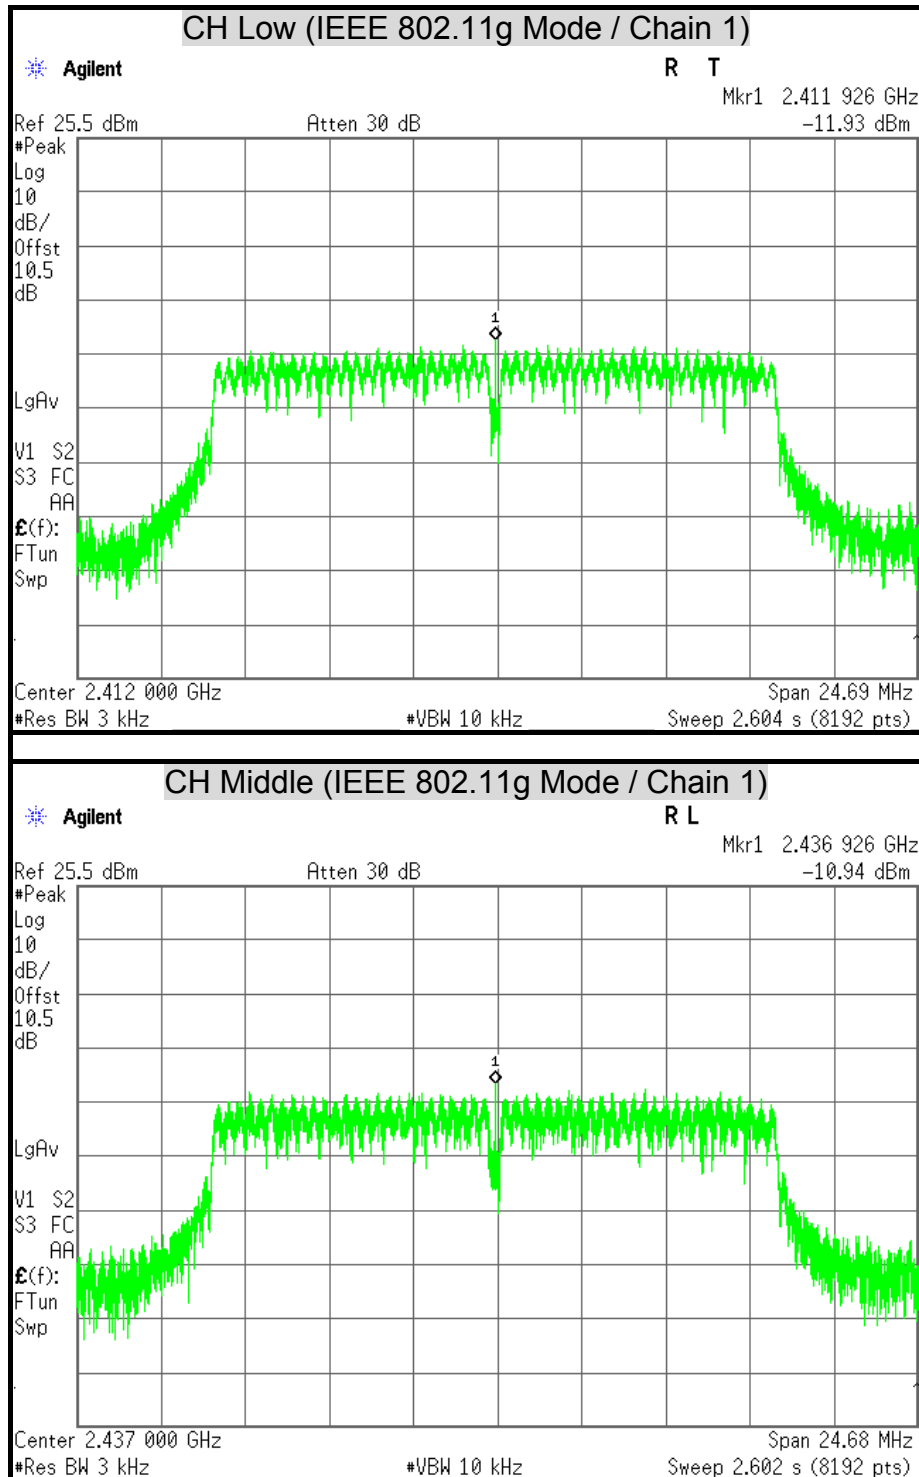



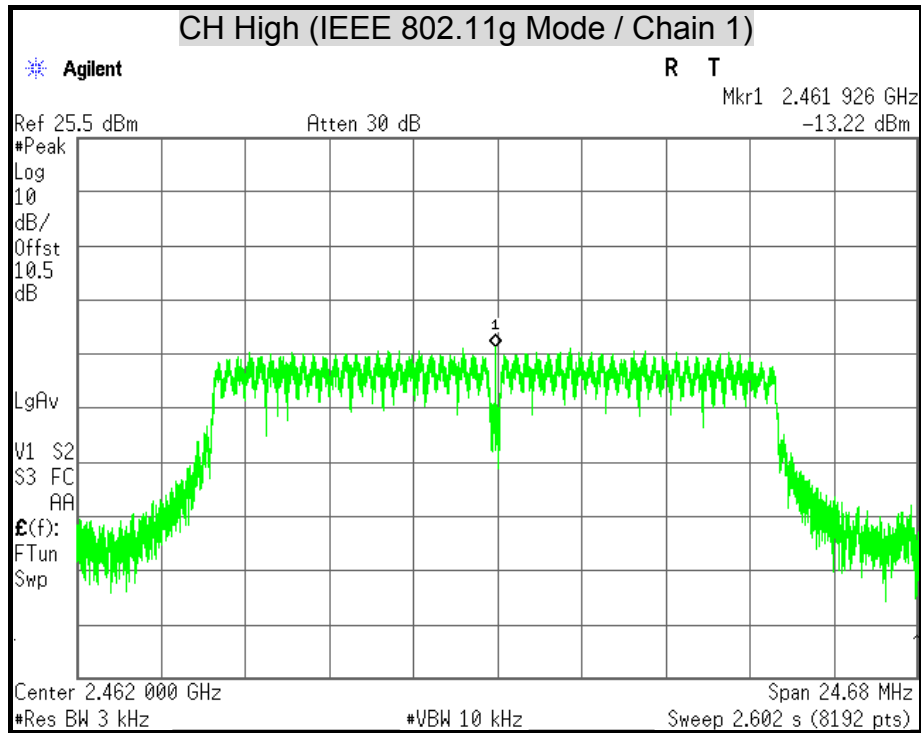


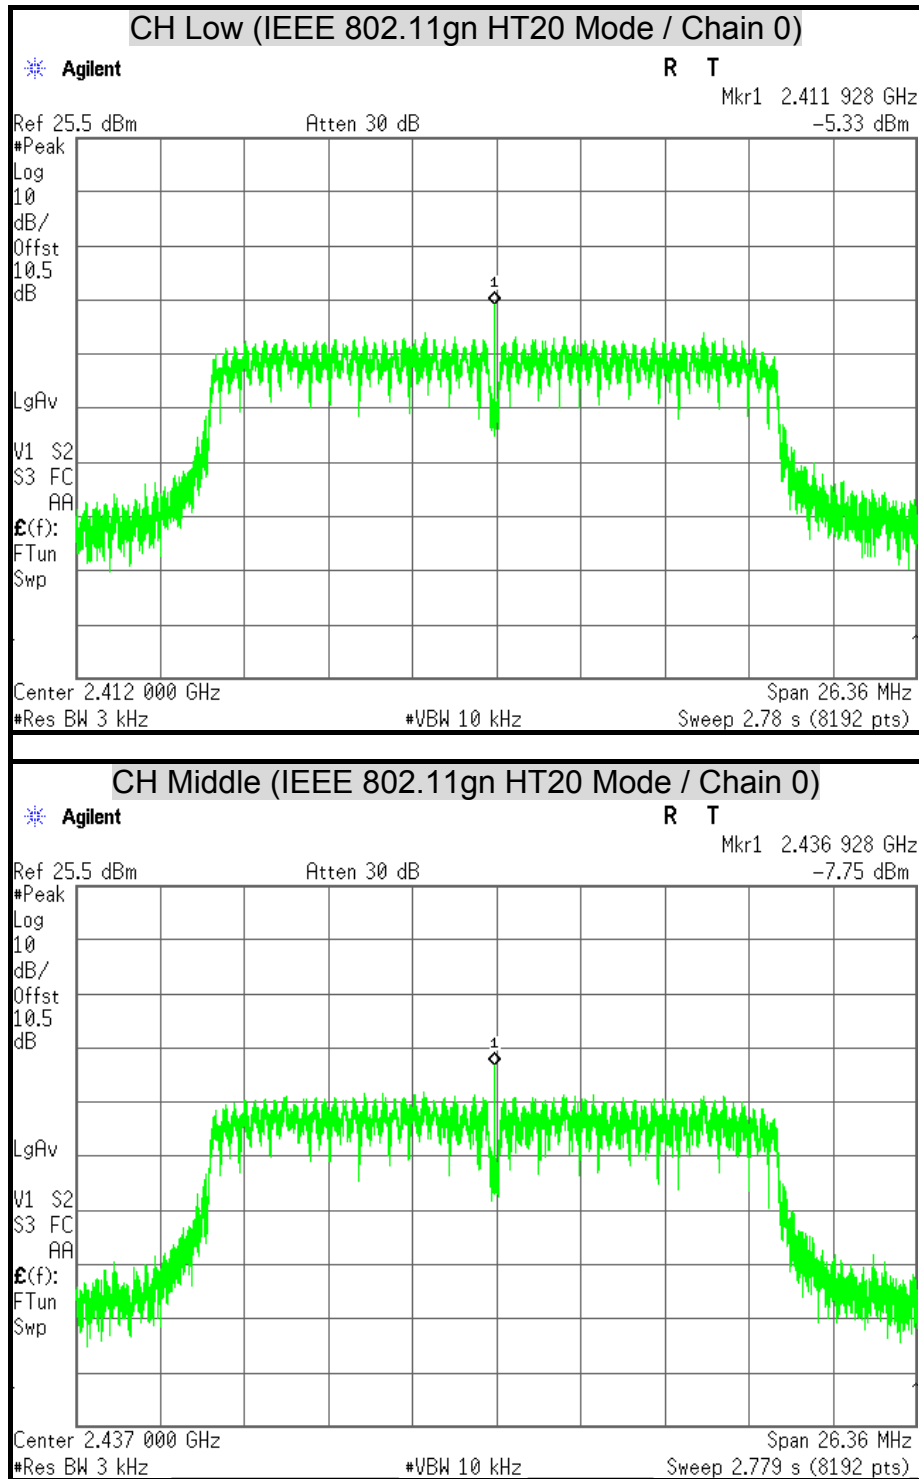


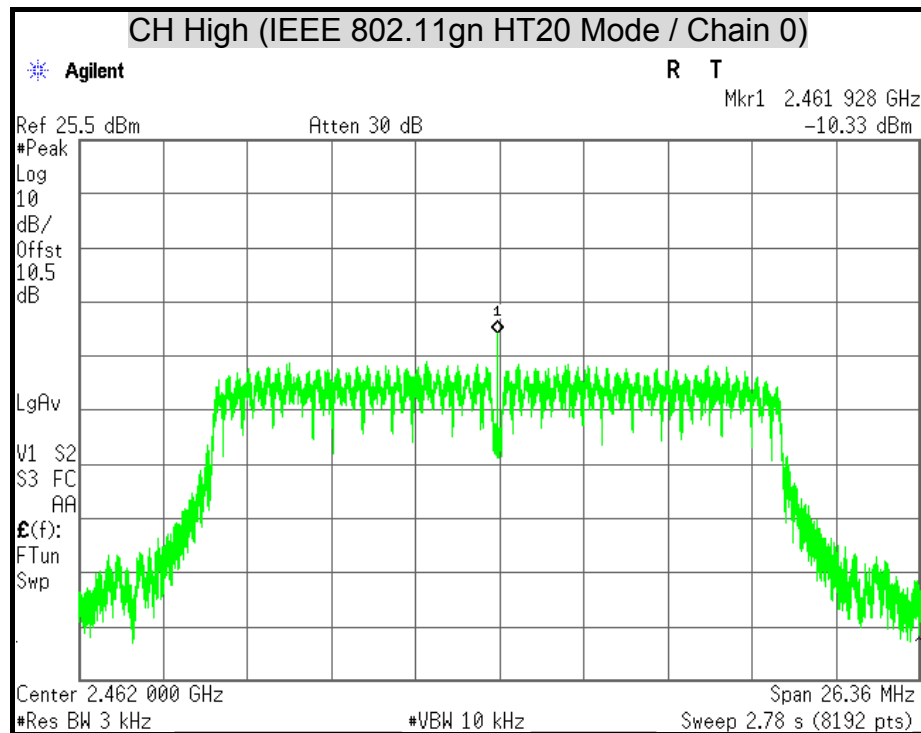


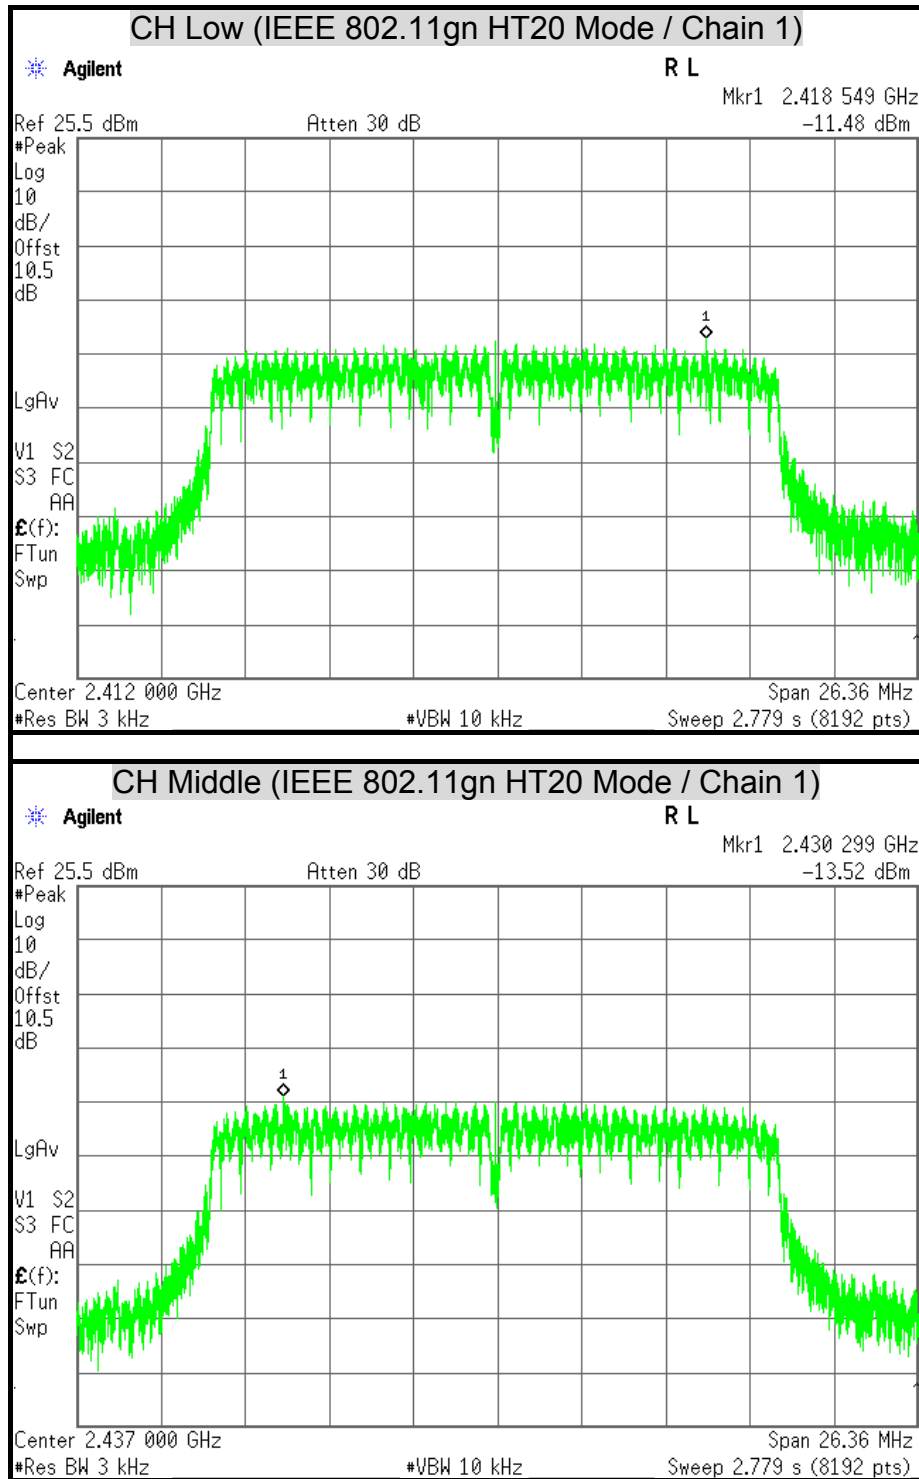


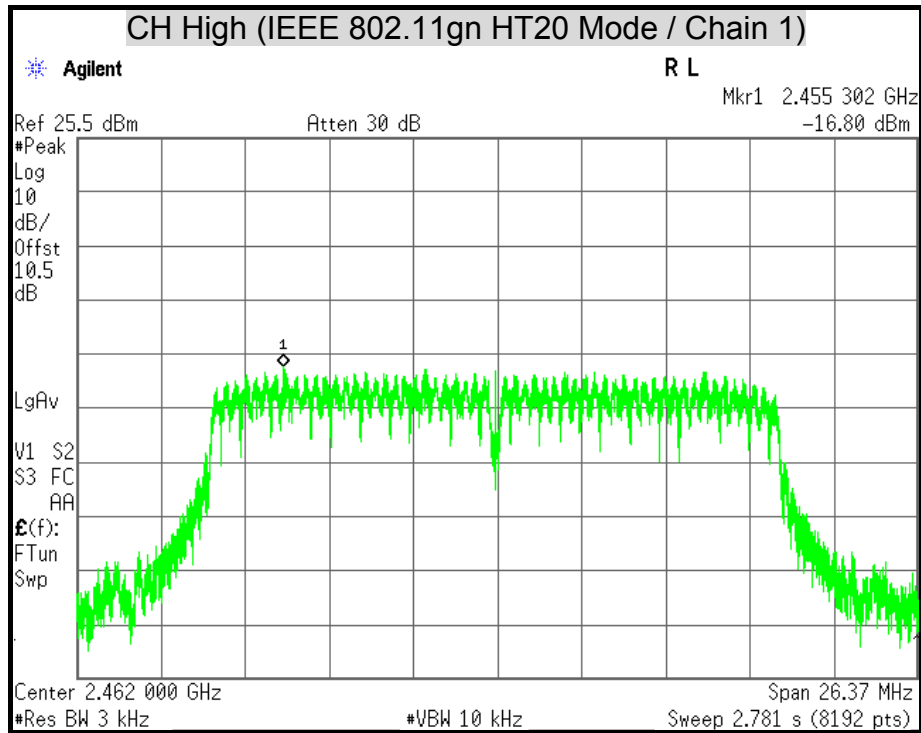

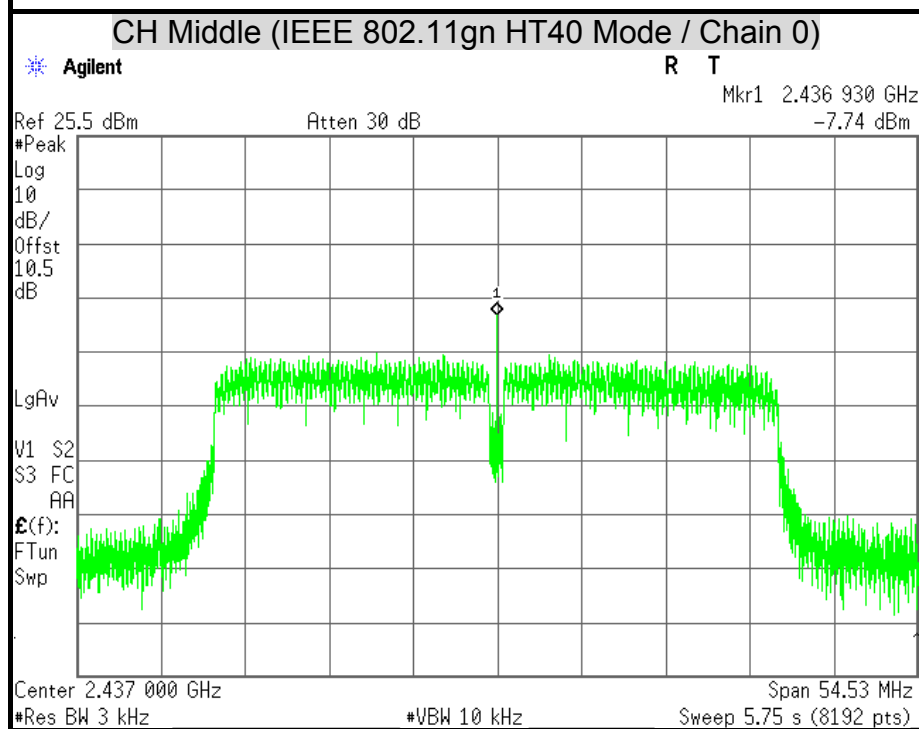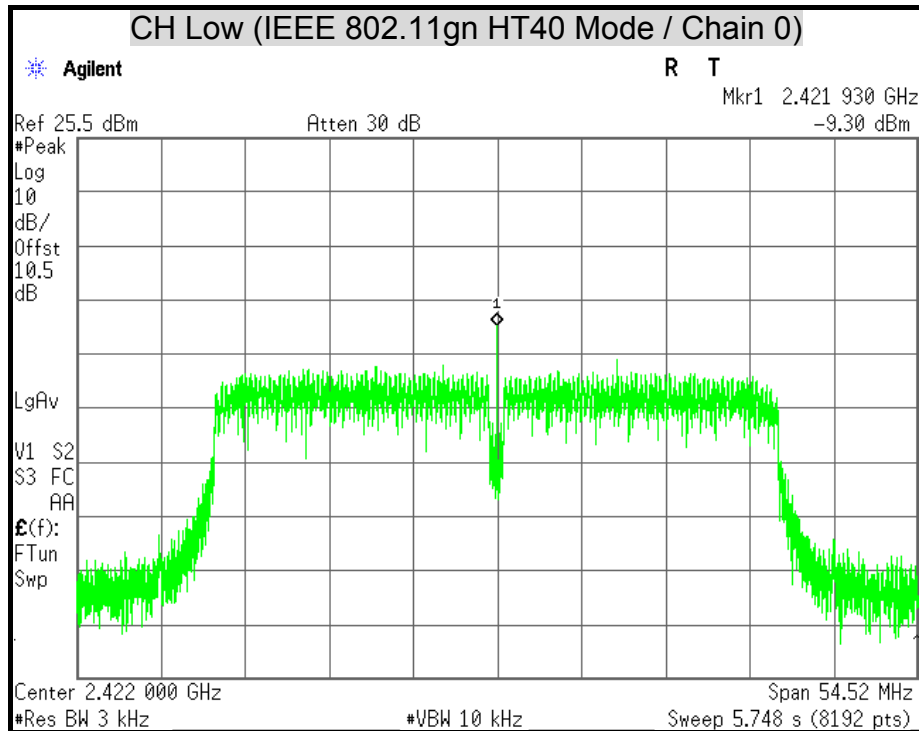

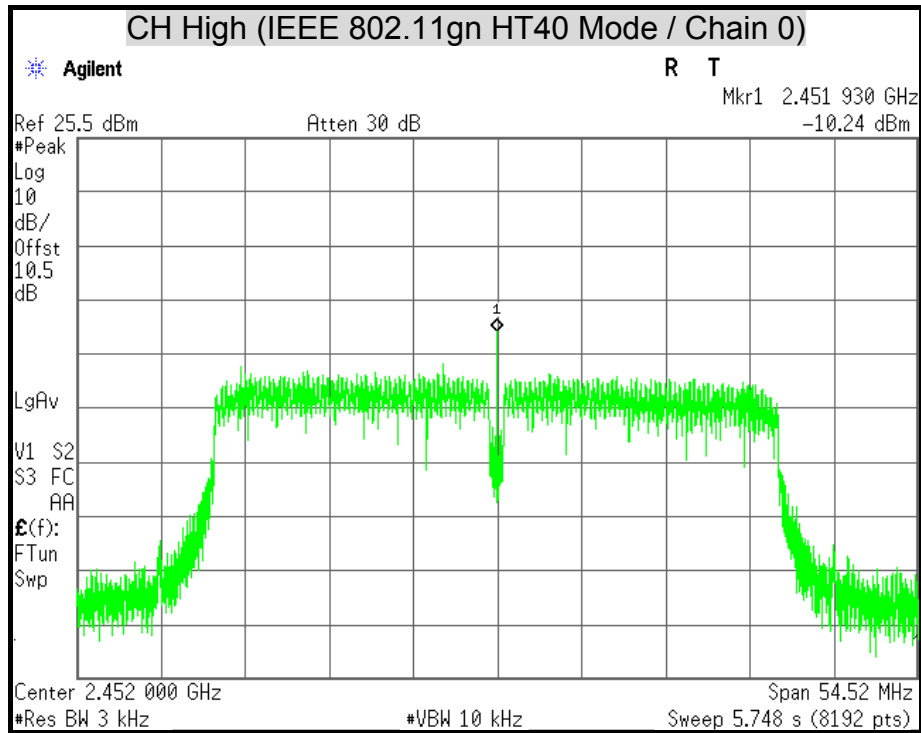

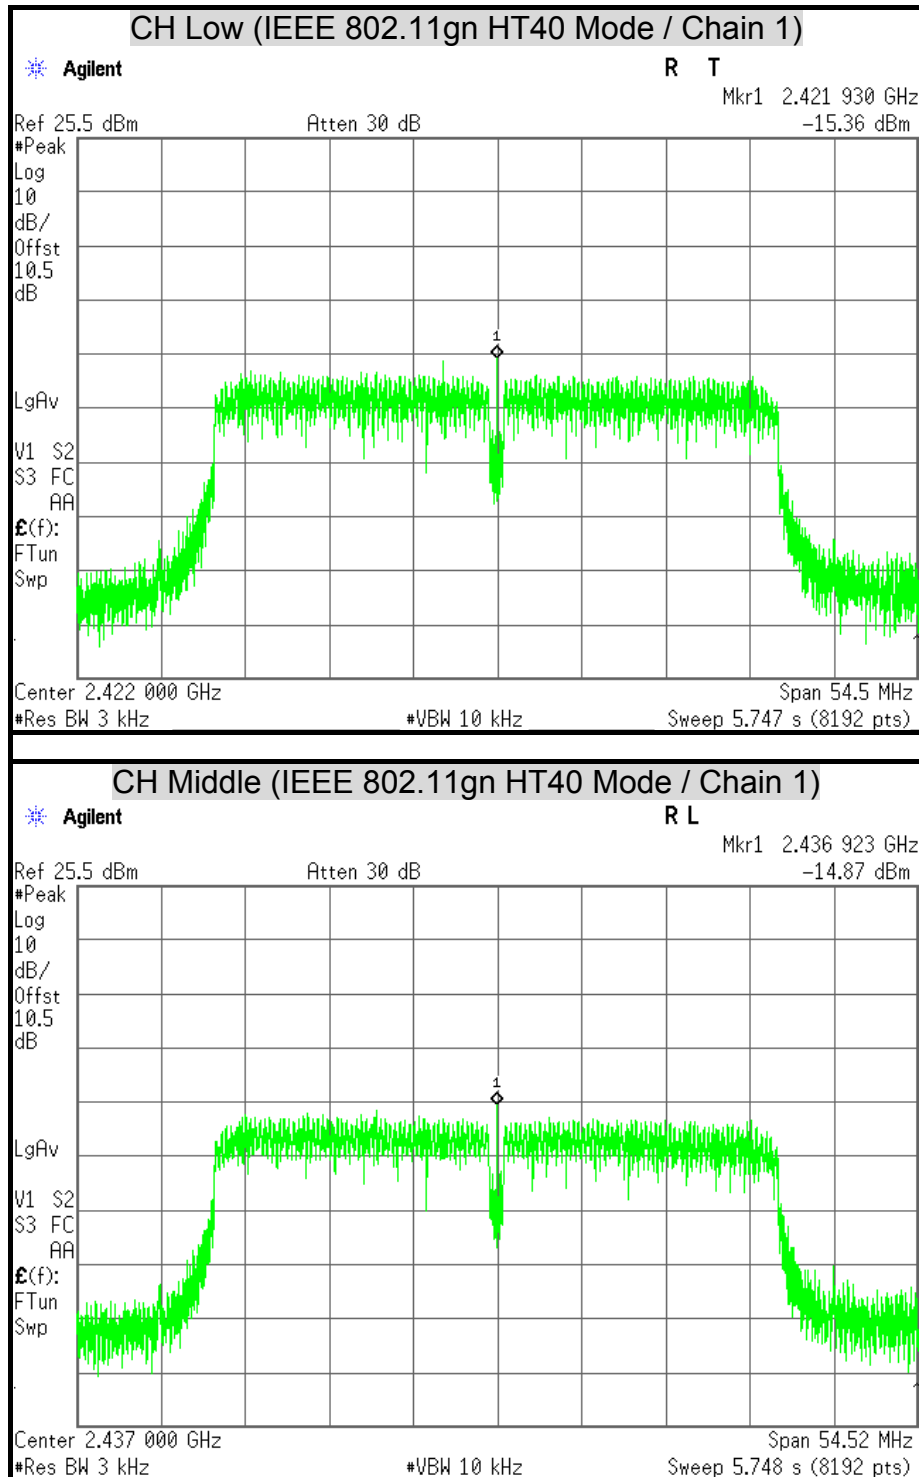

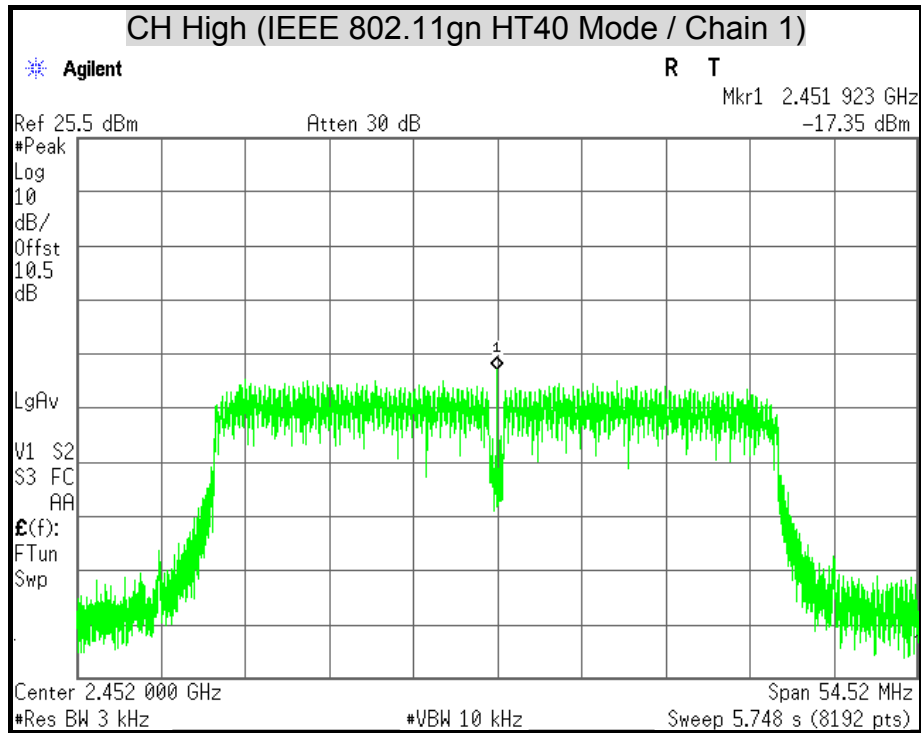



7.5 CONDUCTED SPURIOUS EMISSION

LIMITS

§ 15.247(d) In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement. Attenuation below the general limits specified in § 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in § 15.205(a), must also comply with the radiated emission limits specified in § 15.209(a) (see § 15.205(c)).

TEST EQUIPMENT

Name of Equipment	Manufacturer	Model	Serial Number	Calibration Due
Spectrum Analyzer	Agilent	E4446A	MY43360132	06/10/2015

Remark: Each piece of equipment is scheduled for calibration once a year.

TEST SETUP



TEST PROCEDURE


The transmitter output is connected to a spectrum analyzer. The resolution bandwidth is set to 100 kHz. The video bandwidth is set to 300 kHz.

The spectrum from 30 MHz to 26.5 GHz is investigated with the transmitter set to the lowest, middle, and highest channels in the 2.4 GHz band.



TEST RESULTS

OUT-OF-BAND SPURIOUS EMISSIONS-CONDUCTED MEASUREMENT

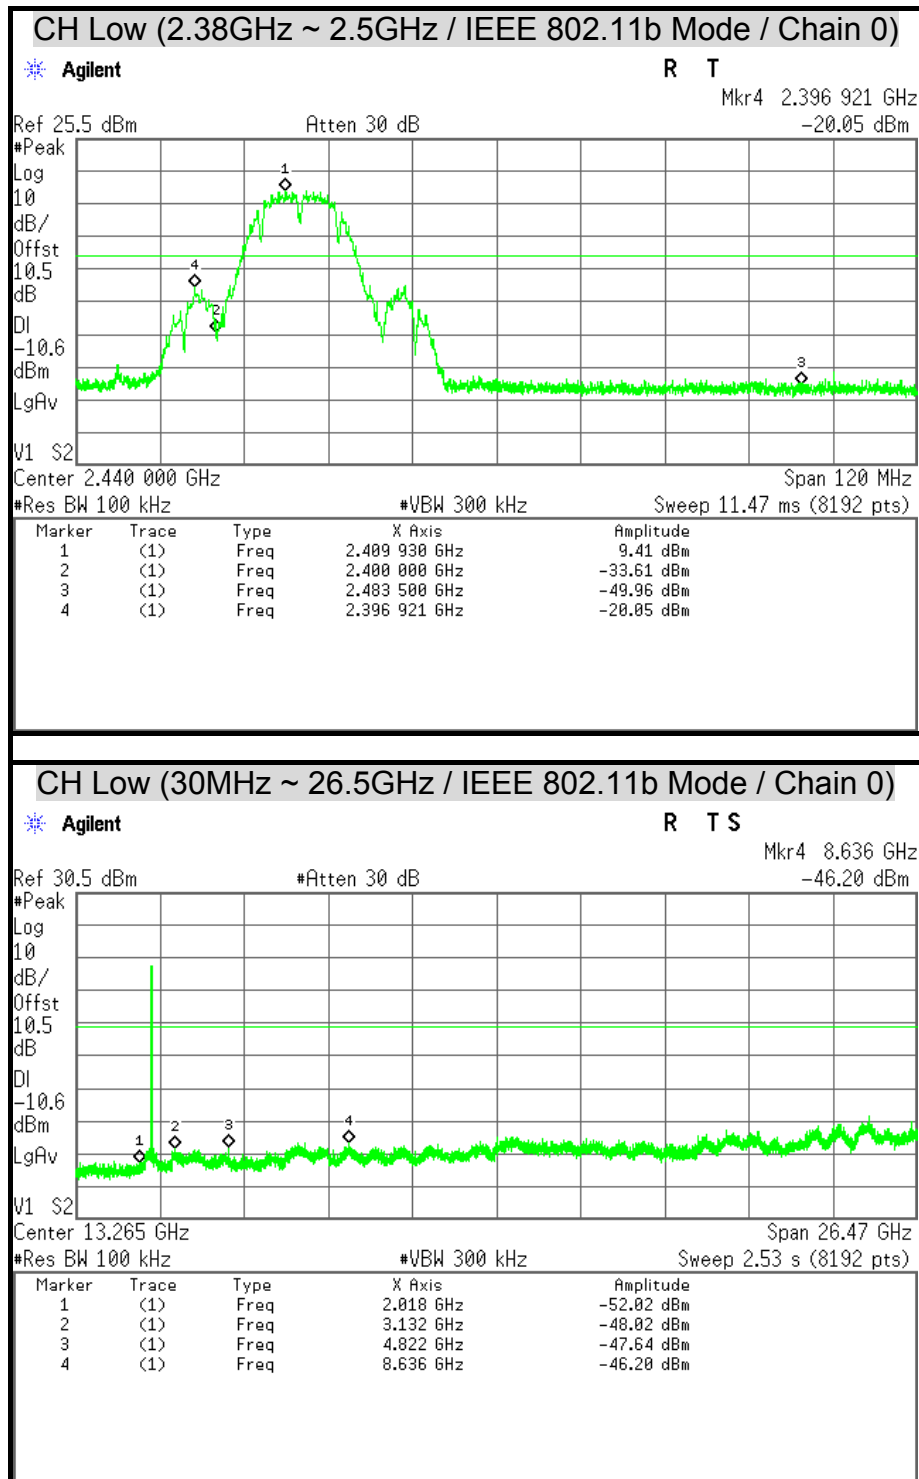



CH Middle (2.38GHz ~ 2.5GHz / IEEE 802.11b Mode / Chain 0)

Agilent

R T

Mkr3 2.483 500 GHz
-51.27 dBm

Ref 25.5 dBm

Atten 30 dB

#Peak

Log

10

dB/

Offst

10.5

dB

DI

-10.1

dBm

LgAv

V1 S2

Center 2.440 000 GHz

Span 120 MHz

#Res BW 100 kHz

#VBW 300 kHz

Sweep 11.47 ms (8192 pts)

Marker	Trace	Type	X Axis	Amplitude
1	(1)	Freq	2.434 924 GHz	9.93 dBm
2	(1)	Freq	2.400 000 GHz	-49.40 dBm
3	(1)	Freq	2.483 500 GHz	-51.27 dBm

CH Middle (30MHz ~ 26.5GHz / IEEE 802.11b Mode / Chain 0)

Agilent

R T S

Mkr4 7.876 GHz
-45.24 dBm

Ref 30.5 dBm

#Atten 30 dB

#Peak

Log

10

dB/

Offst

10.5

dB

DI

-10.1

dBm

LgAv

V1 S2

Center 13.265 GHz

Span 26.47 GHz

#Res BW 100 kHz

#VBW 300 kHz

Sweep 2.53 s (8192 pts)

Marker	Trace	Type	X Axis	Amplitude
1	(1)	Freq	1.136 GHz	-51.94 dBm
2	(1)	Freq	3.187 GHz	-48.28 dBm
3	(1)	Freq	4.687 GHz	-48.09 dBm
4	(1)	Freq	7.876 GHz	-45.24 dBm



CH High (2.38GHz ~ 2.5GHz / IEEE 802.11b Mode / Chain 0)

Agilent

R T

Mkr3 2.483 500 GHz
-50.46 dBm

Ref 25.5 dBm

Atten 30 dB

#Peak

Log

10

dB/

Offst

10.5

dB

DI

-11.0

dBm

LgAv

V1 S2

Center 2.440 000 GHz

Span 120 MHz

#Res BW 100 kHz

#VBW 300 kHz

Sweep 11.47 ms (8192 pts)

Marker	Trace	Type	X Axis	Amplitude
1	(1)	Freq	2.459 932 GHz	8.96 dBm
2	(1)	Freq	2.400 000 GHz	-49.20 dBm
3	(1)	Freq	2.483 500 GHz	-50.46 dBm

CH High (30MHz ~ 26.5GHz / IEEE 802.11b Mode / Chain 0)

Agilent

R T S

Mkr4 7.075 GHz
-46.02 dBm

Ref 30.5 dBm

#Atten 30 dB

#Peak

Log

10

dB/

Offst

10.5

dB

DI

-11.0

dBm

LgAv

V1 S2

Center 13.265 GHz


Span 26.47 GHz

#Res BW 100 kHz

#VBW 300 kHz

Sweep 2.53 s (8192 pts)

Marker	Trace	Type	X Axis	Amplitude
1	(1)	Freq	1.901 GHz	-51.38 dBm
2	(1)	Freq	3.064 GHz	-48.12 dBm
3	(1)	Freq	4.587 GHz	-48.52 dBm
4	(1)	Freq	7.075 GHz	-46.02 dBm

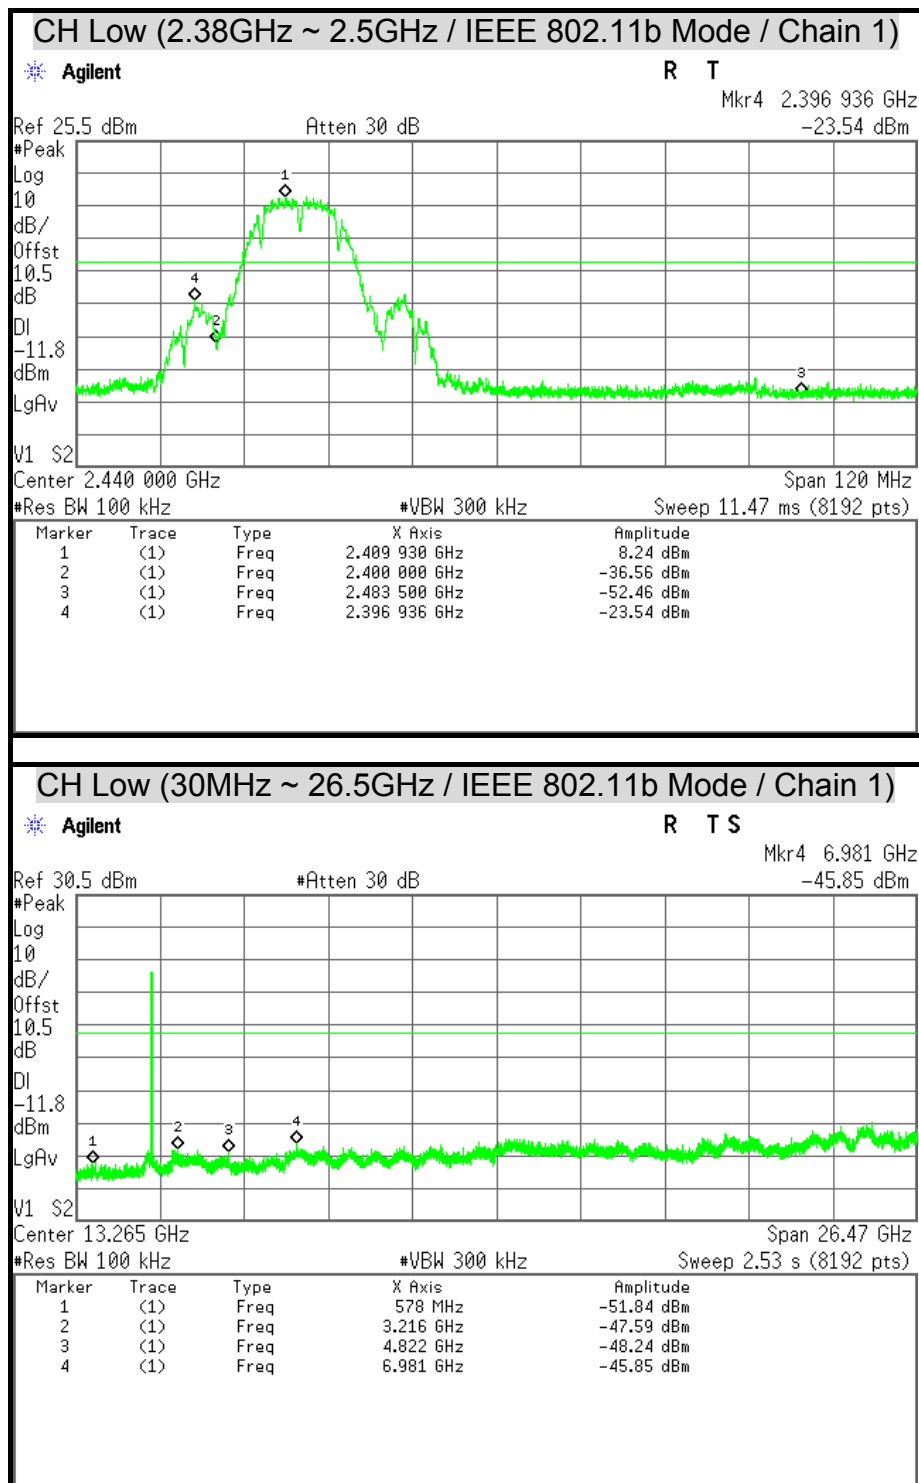



CH Middle (2.38GHz ~ 2.5GHz / IEEE 802.11b Mode / Chain 1)

Agilent

R T

Mkr3 2.483 500 GHz

-51.01 dBm

Ref 25.5 dBm

Atten 30 dB

#Peak

Log

10

dB/

Offst

10.5

dB

DI

-11.5

dBm

LgAv

V1 S2

Center 2.440 000 GHz

Span 120 MHz

#Res BW 100 kHz

#VBW 300 kHz

Sweep 11.47 ms (8192 pts)

Marker	Trace	Type	X Axis	Amplitude
1	(1)	Freq	2.434 924 GHz	8.52 dBm
2	(1)	Freq	2.400 000 GHz	-46.80 dBm
3	(1)	Freq	2.483 500 GHz	-51.01 dBm

CH Middle (30MHz ~ 26.5GHz / IEEE 802.11b Mode / Chain 1)

Agilent

R T S

Mkr4 8.865 GHz

-46.81 dBm

Ref 30.5 dBm

#Atten 30 dB

#Peak

Log

10

dB/

Offst

10.5

dB

DI

-11.5

dBm

LgAv

V1 S2

Center 13.265 GHz

Span 26.47 GHz

#Res BW 100 kHz

#VBW 300 kHz

Sweep 2.53 s (8192 pts)

Marker	Trace	Type	X Axis	Amplitude
1	(1)	Freq	1.622 GHz	-51.33 dBm
2	(1)	Freq	3.821 GHz	-48.56 dBm
3	(1)	Freq	7.004 GHz	-46.15 dBm
4	(1)	Freq	8.865 GHz	-46.81 dBm



CH High (2.38GHz ~ 2.5GHz / IEEE 802.11b Mode / Chain 1)

Agilent

R T

Mkr3 2.483 500 GHz
-48.08 dBm

Ref 25.5 dBm

Atten 30 dB

#Peak

Log

10

dB/

Offst

10.5

dB

DI

-12.5

dBm

LgAv

V1 S2

Center 2.440 000 GHz

Span 120 MHz

#Res BW 100 kHz

#VBW 300 kHz

Sweep 11.47 ms (8192 pts)

Marker	Trace	Type	X Axis	Amplitude
1	(1)	Freq	2.459 932 GHz	7.47 dBm
2	(1)	Freq	2.400 000 GHz	-47.88 dBm
3	(1)	Freq	2.483 500 GHz	-48.08 dBm

CH High (30MHz ~ 26.5GHz / IEEE 802.11b Mode / Chain 1)

Agilent

R L S

Mkr4 11.143 GHz
-46.04 dBm

Ref 30.5 dBm

#Atten 30 dB

#Peak

Log

10

dB/

Offst

10.5

dB

DI

-12.5

dBm

LgAv

V1 S2

Center 13.265 GHz


Span 26.47 GHz

#Res BW 100 kHz

#VBW 300 kHz

Sweep 2.53 s (8192 pts)

Marker	Trace	Type	X Axis	Amplitude
1	(1)	Freq	1.643 GHz	-45.81 dBm
2	(1)	Freq	3.614 GHz	-47.73 dBm
3	(1)	Freq	7.081 GHz	-46.13 dBm
4	(1)	Freq	11.143 GHz	-46.04 dBm

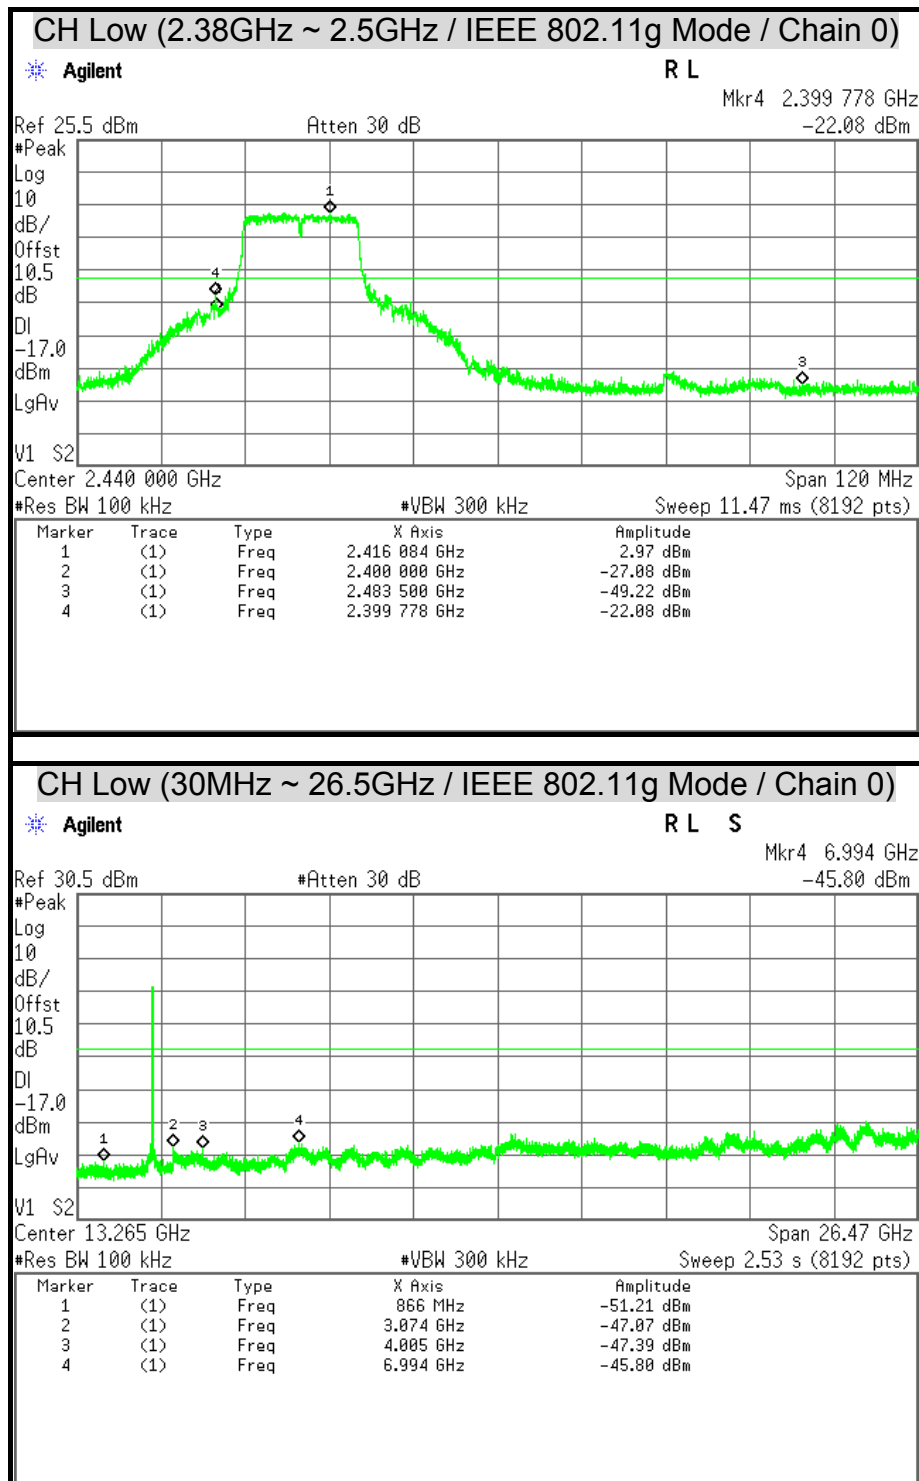



CH Middle (2.38GHz ~ 2.5GHz / IEEE 802.11g Mode / Chain 0)

Agilent

R T

Mkr3 2.483 500 GHz
-50.66 dBm

Ref 25.5 dBm

Atten 30 dB

#Peak

Log

10

dB/

Offst

10.5

dB

DI

-15.7

dBm

LgAv

V1 S2

Center 2.440 000 GHz

Span 120 MHz

#Res BW 100 kHz

#VBW 300 kHz

Sweep 11.47 ms (8192 pts)

Marker	Trace	Type	X Axis	Amplitude
1	(1)	Freq	2.434 850 GHz	4.29 dBm
2	(1)	Freq	2.400 000 GHz	-47.88 dBm
3	(1)	Freq	2.483 500 GHz	-50.66 dBm

CH Middle (30MHz ~ 26.5GHz / IEEE 802.11g Mode / Chain 0)

Agilent

R T S

Mkr4 8.765 GHz
-45.69 dBm

Ref 30.5 dBm

#Atten 30 dB

#Peak

Log

10

dB/

Offst

10.5

dB

DI

-15.7

dBm

LgAv

V1 S2

Center 13.265 GHz

Span 26.47 GHz

#Res BW 100 kHz

#VBW 300 kHz

Sweep 2.53 s (8192 pts)

Marker	Trace	Type	X Axis	Amplitude
1	(1)	Freq	812 MHz	-52.34 dBm
2	(1)	Freq	3.132 GHz	-47.88 dBm
3	(1)	Freq	6.984 GHz	-46.02 dBm
4	(1)	Freq	8.765 GHz	-45.69 dBm



CH High (2.38GHz ~ 2.5GHz / IEEE 802.11g Mode / Chain 0)

Agilent

R T

Mkr3 2.483 500 GHz
-37.01 dBm

Ref 25.5 dBm

Atten 30 dB

#Peak

Log

10

dB/

Offst

10.5

dB

DI

-17.4

dBm

LgAv

V1 S2

Center 2.440 000 GHz

Span 120 MHz

#Res BW 100 kHz

#VBW 300 kHz

Sweep 11.47 ms (8192 pts)

Marker	Trace	Type	X Axis	Amplitude
1	(1)	Freq	2.459 184 GHz	2.59 dBm
2	(1)	Freq	2.400 000 GHz	-50.81 dBm
3	(1)	Freq	2.483 500 GHz	-37.01 dBm

CH High (30MHz ~ 26.5GHz / IEEE 802.11g Mode / Chain 0)

Agilent

R T S

Mkr4 13.784 GHz
-44.16 dBm

Ref 30.5 dBm

#Atten 30 dB

#Peak

Log

10

dB/

Offst

10.5

dB

DI

-17.4

dBm

LgAv

V1 S2

Center 13.265 GHz


Span 26.47 GHz

#Res BW 100 kHz

#VBW 300 kHz

Sweep 2.53 s (8192 pts)

Marker	Trace	Type	X Axis	Amplitude
1	(1)	Freq	1.091 GHz	-52.43 dBm
2	(1)	Freq	3.788 GHz	-47.59 dBm
3	(1)	Freq	7.156 GHz	-46.34 dBm
4	(1)	Freq	13.784 GHz	-44.16 dBm

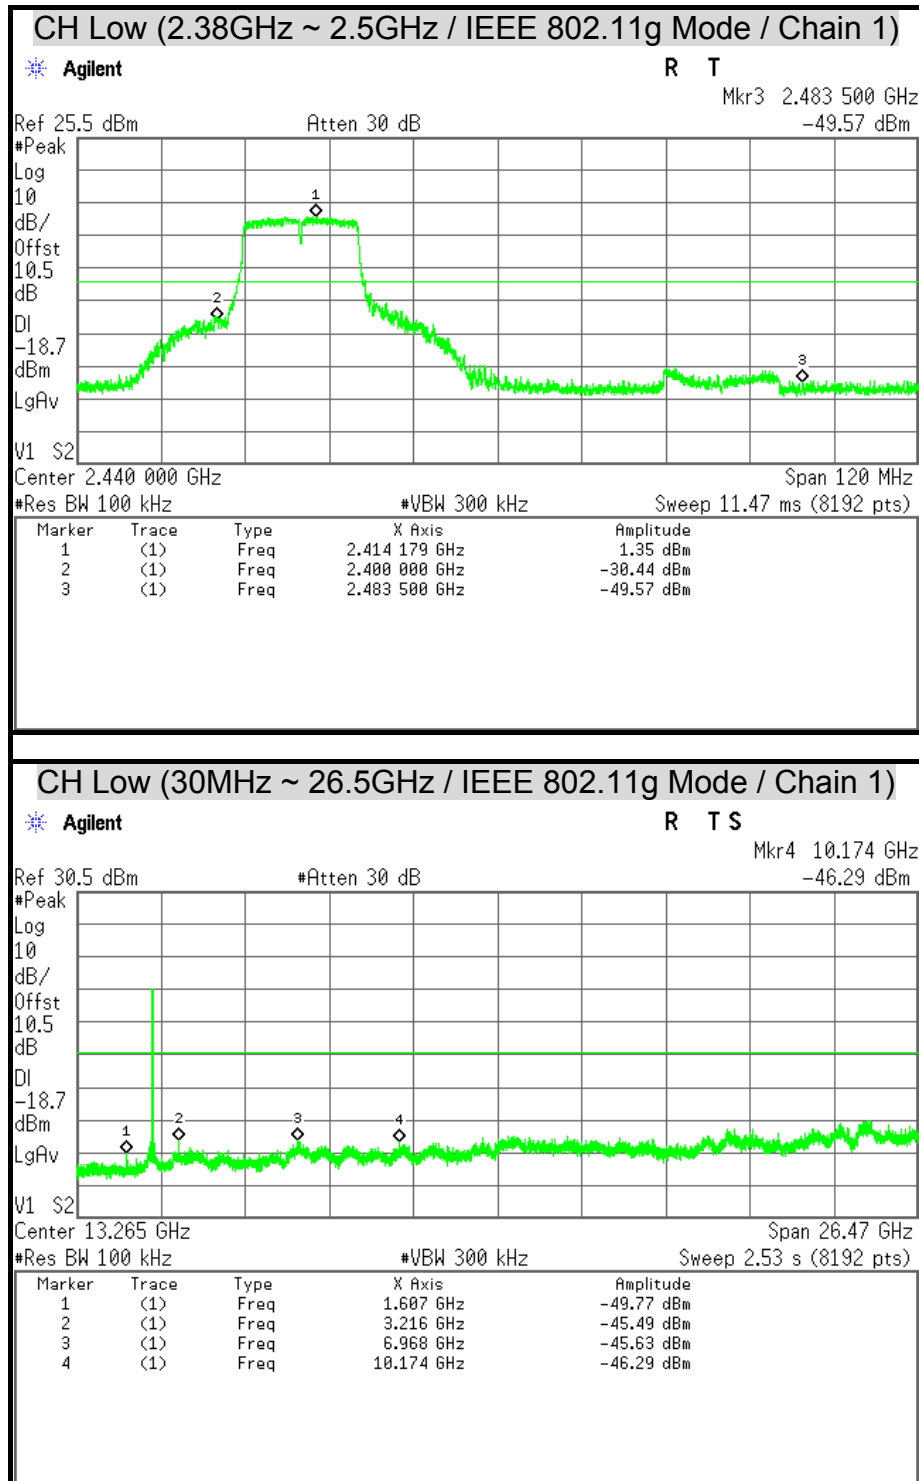



CH Middle (2.38GHz ~ 2.5GHz / IEEE 802.11g Mode / Chain 1)

Agilent

R T

Mkr3 2.483 500 GHz
-49.71 dBm

Ref 25.5 dBm

Atten 30 dB

#Peak

Log

10

dB/

Offst

10.5

dB

DI

-17.9

dBm

LgAv

V1 S2

Center 2.440 000 GHz

Span 120 MHz

#Res BW 100 kHz

#VBW 300 kHz

Sweep 11.47 ms (8192 pts)

Marker	Trace	Type	X Axis	Amplitude
1	(1)	Freq	2.441 077 GHz	2.06 dBm
2	(1)	Freq	2.400 000 GHz	-49.60 dBm
3	(1)	Freq	2.483 500 GHz	-49.71 dBm

CH Middle (30MHz ~ 26.5GHz / IEEE 802.11g Mode / Chain 1)

Agilent

R T S

Mkr4 13.464 GHz
-43.79 dBm

Ref 30.5 dBm

#Atten 30 dB

#Peak

Log

10

dB/

Offst

10.5

dB

DI

-17.9

dBm

LgAv

V1 S2

Center 13.265 GHz

Span 26.47 GHz

#Res BW 100 kHz

#VBW 300 kHz

Sweep 2.53 s (8192 pts)

Marker	Trace	Type	X Axis	Amplitude
1	(1)	Freq	1.622 GHz	-49.11 dBm
2	(1)	Freq	3.249 GHz	-45.77 dBm
3	(1)	Freq	9.628 GHz	-46.00 dBm
4	(1)	Freq	13.464 GHz	-43.79 dBm



CH High (2.38GHz ~ 2.5GHz / IEEE 802.11g Mode / Chain 1)

Agilent

R T

Mkr3 2.483 500 GHz
-41.79 dBm

Ref 25.5 dBm

Atten 30 dB

#Peak

Log

10

dB/

Offst

10.5

dB

DI

-19.2

dBm

LgAv

V1 S2

Center 2.440 000 GHz

Span 120 MHz

#Res BW 100 kHz

#VBW 300 kHz

Sweep 11.47 ms (8192 pts)

Marker	Trace	Type	X Axis	Amplitude
1	(1)	Freq	2.459 184 GHz	0.82 dBm
2	(1)	Freq	2.400 000 GHz	-49.39 dBm
3	(1)	Freq	2.483 500 GHz	-41.79 dBm

CH High (30MHz ~ 26.5GHz / IEEE 802.11g Mode / Chain 1)

Agilent

R T S

Mkr4 9.457 GHz
-47.00 dBm

Ref 30.5 dBm

#Atten 30 dB

#Peak

Log

10

dB/

Offst

10.5

dB

DI

-19.2

dBm

LgAv

V1 S2

Center 13.265 GHz


Span 26.47 GHz


#Res BW 100 kHz


#VBW 300 kHz


Sweep 2.53 s (8192 pts)


Marker	Trace	Type	X Axis	Amplitude
1	(1)	Freq	875 MHz	-51.43 dBm
2	(1)	Freq	3.281 GHz	-47.56 dBm
3	(1)	Freq	7.120 GHz	-46.65 dBm
4	(1)	Freq	9.457 GHz	-47.00 dBm


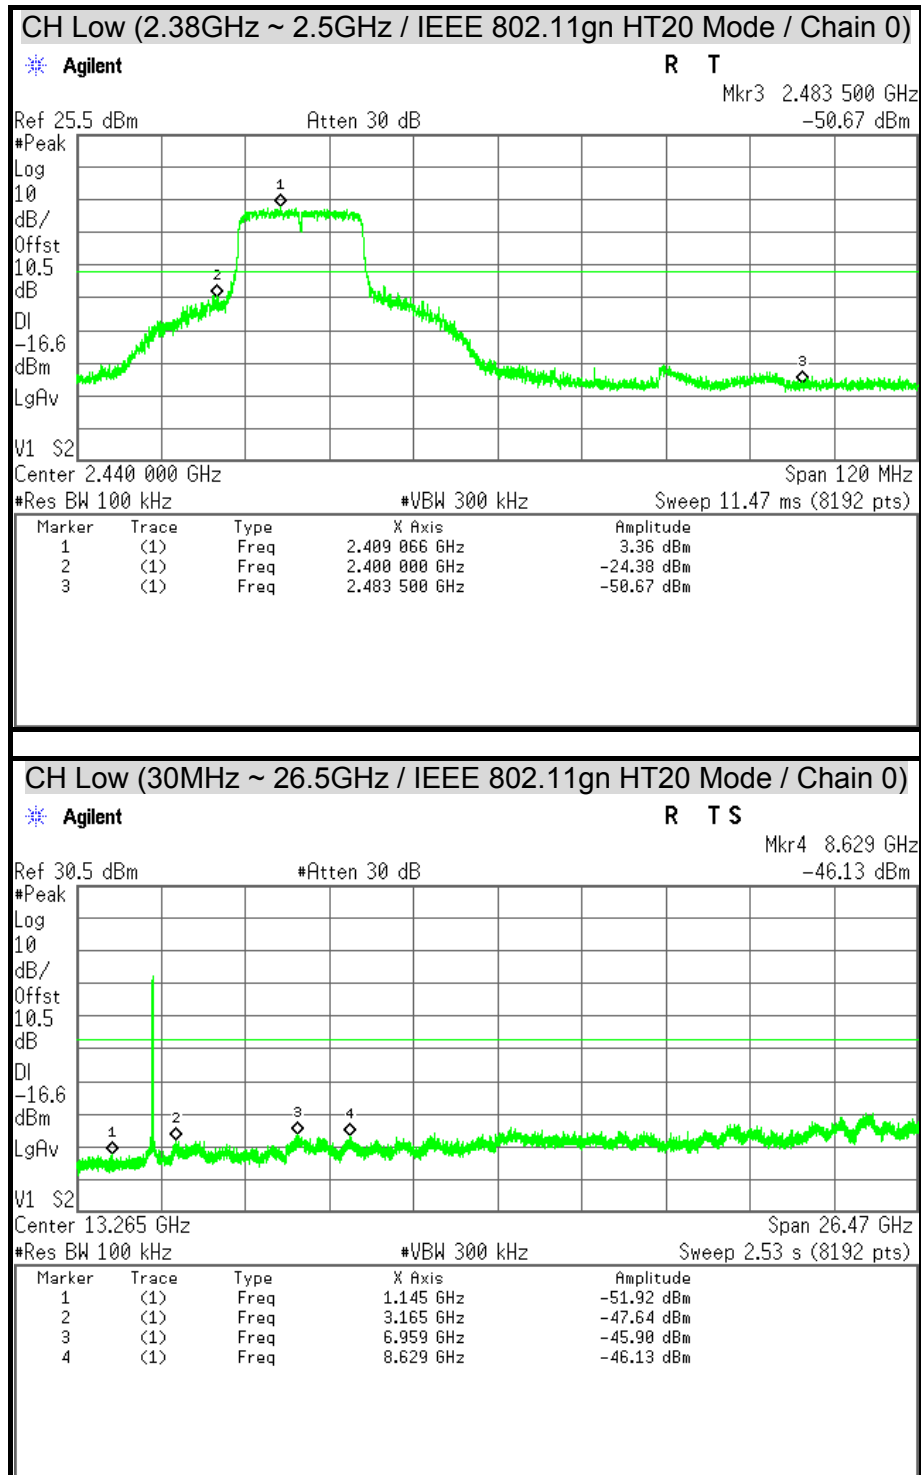


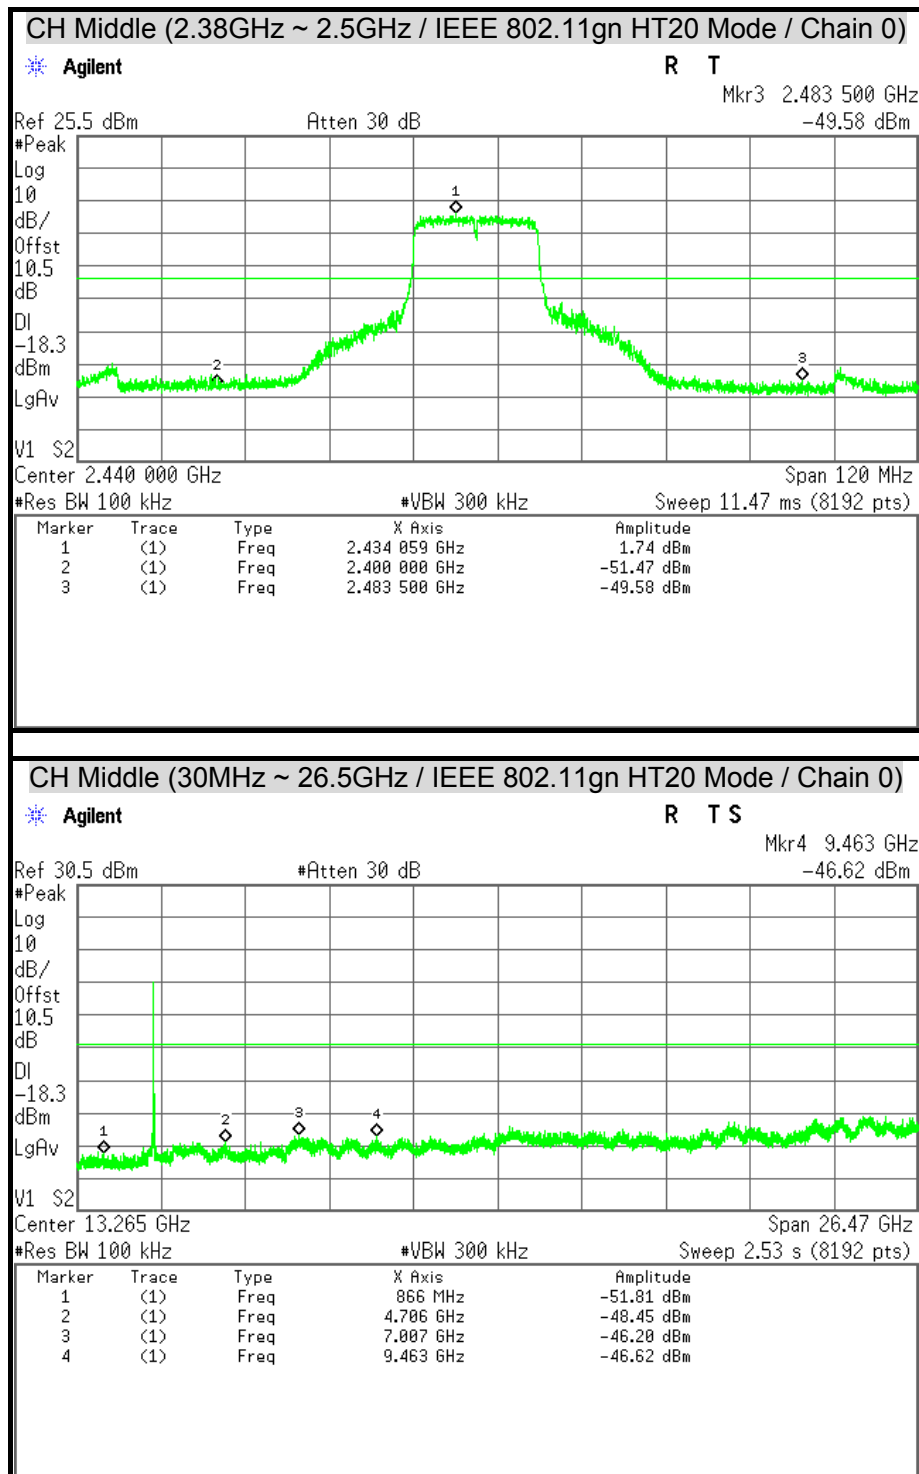


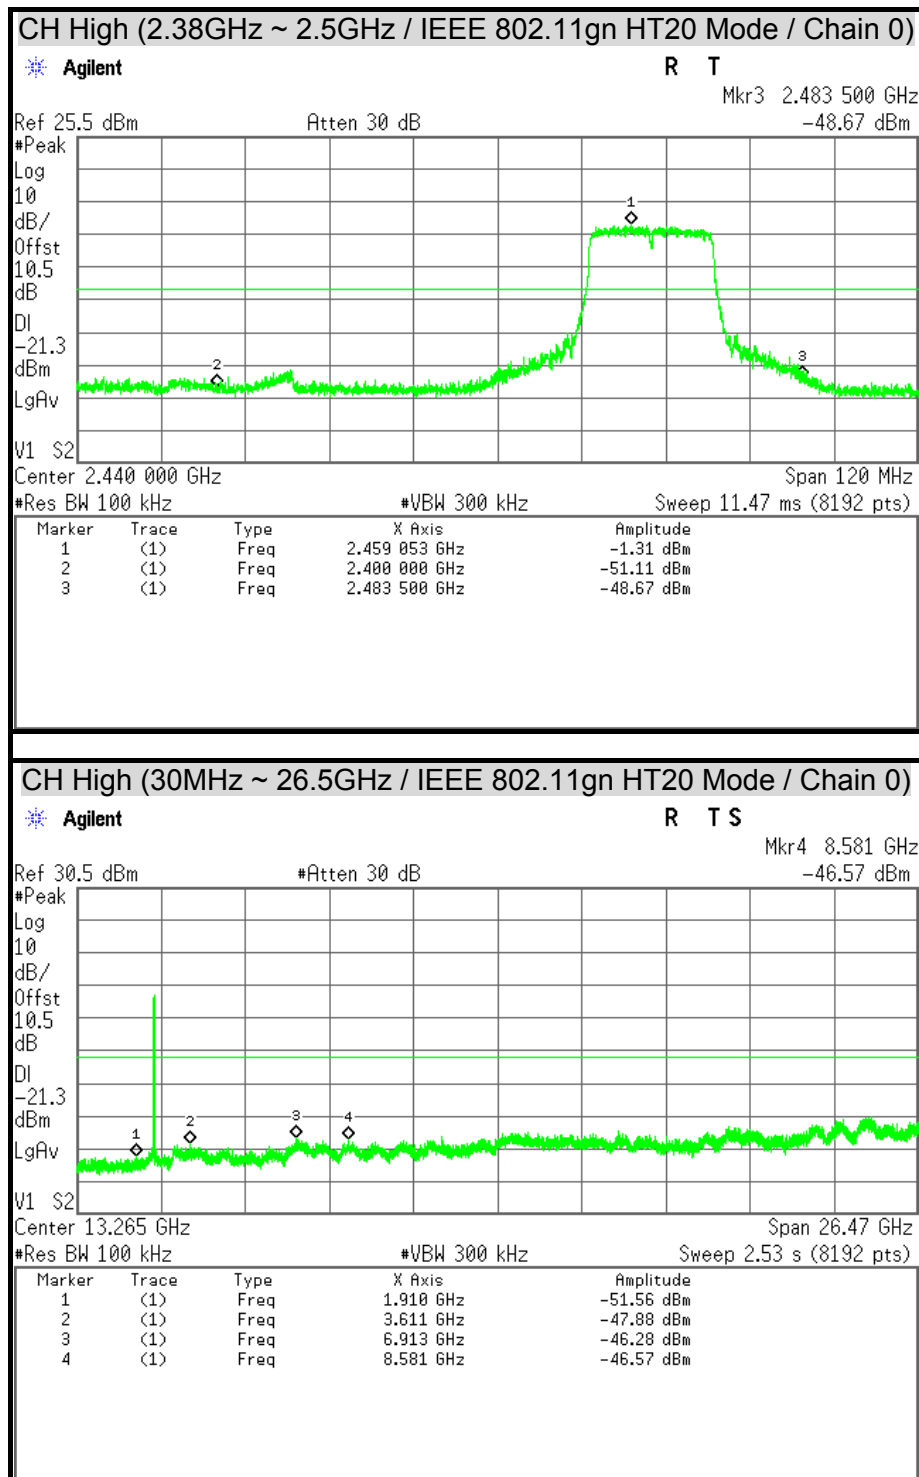


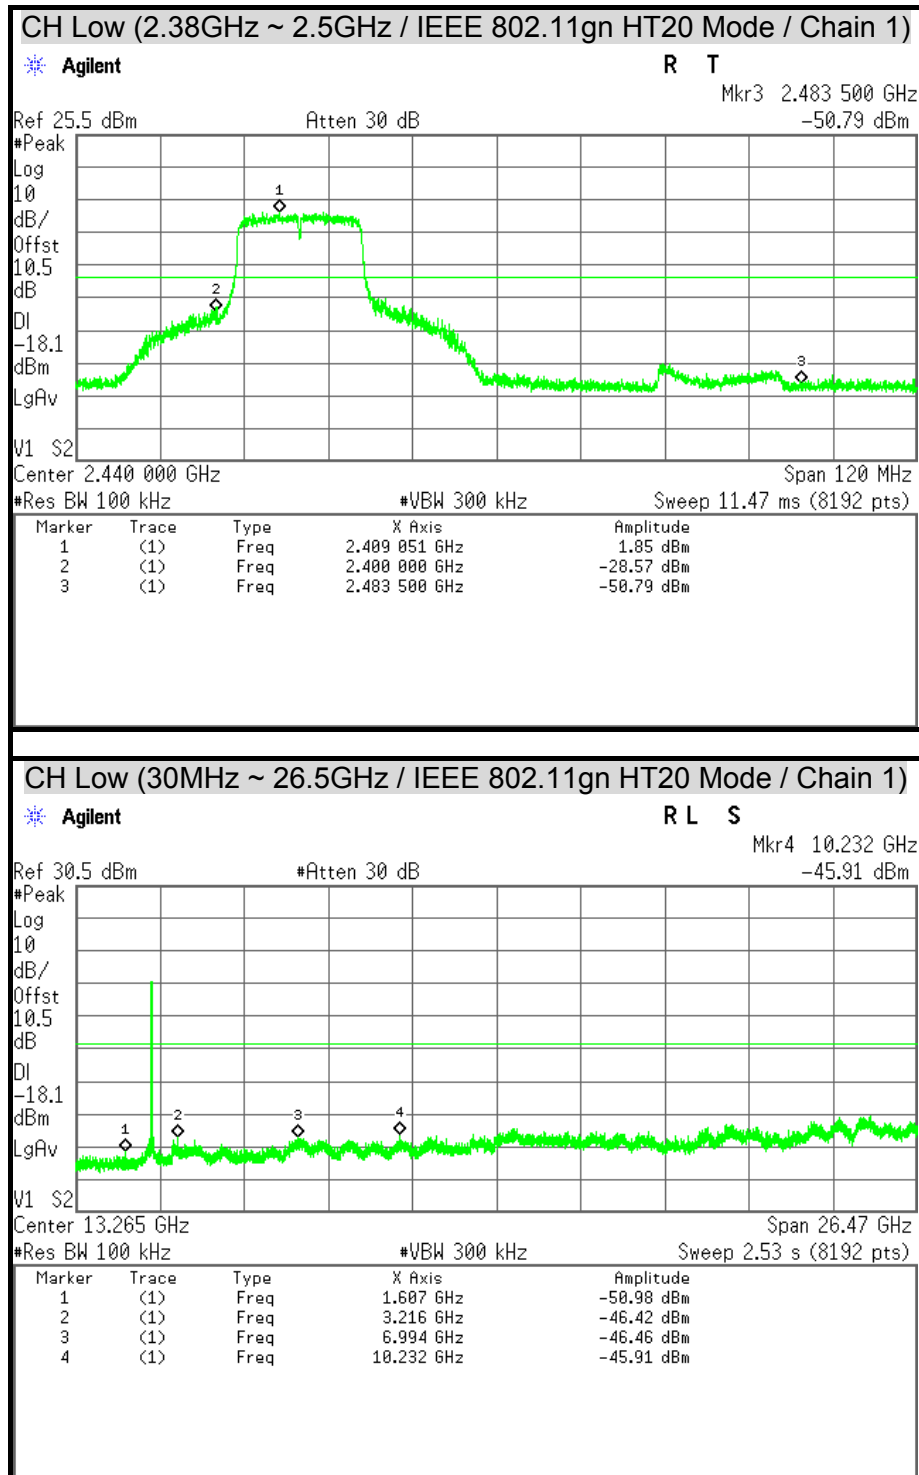


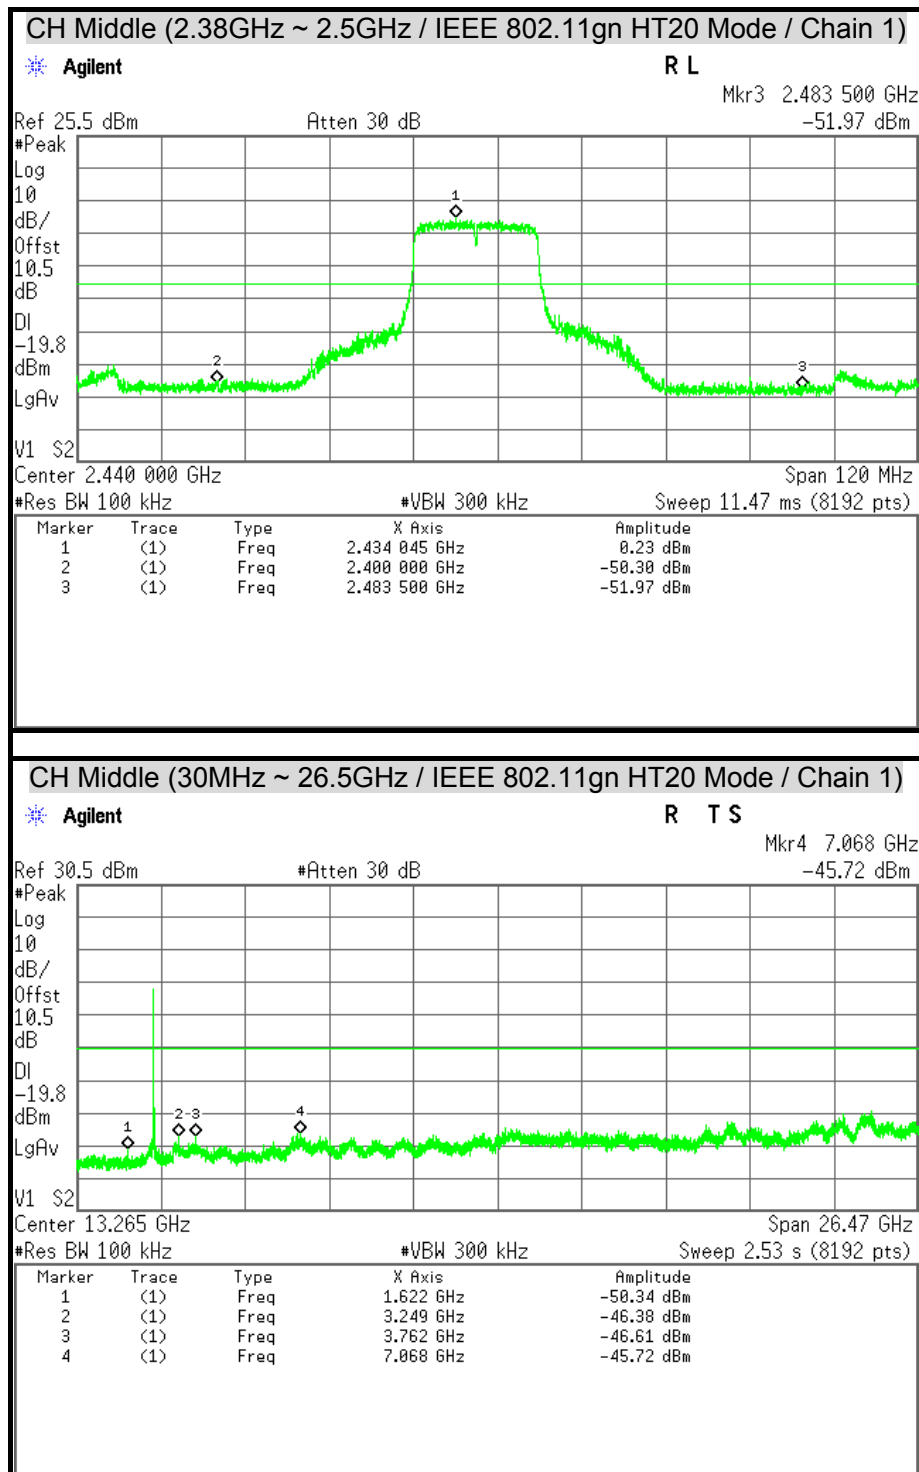


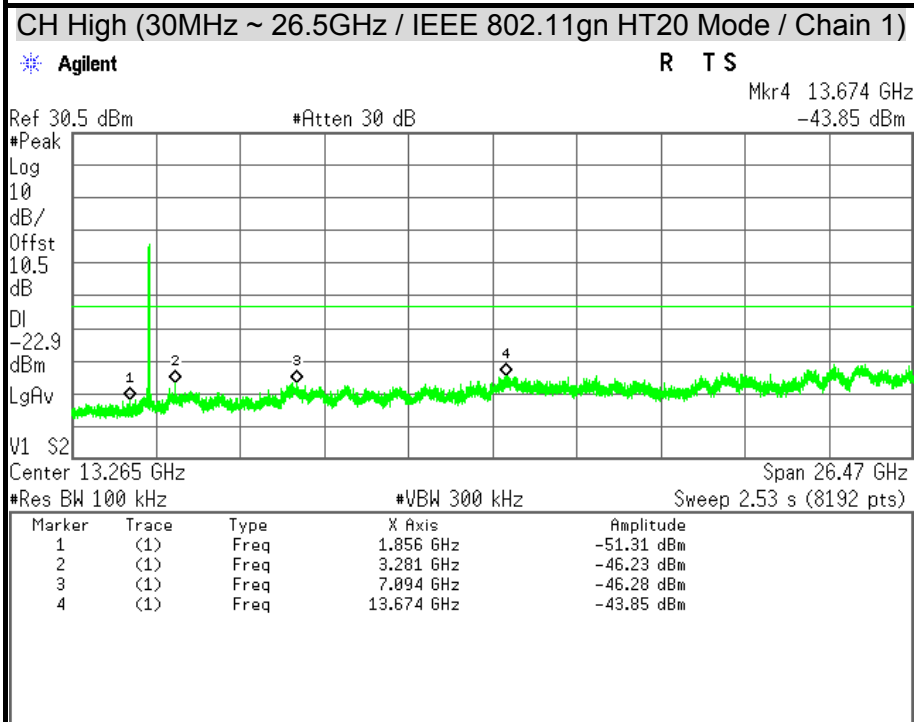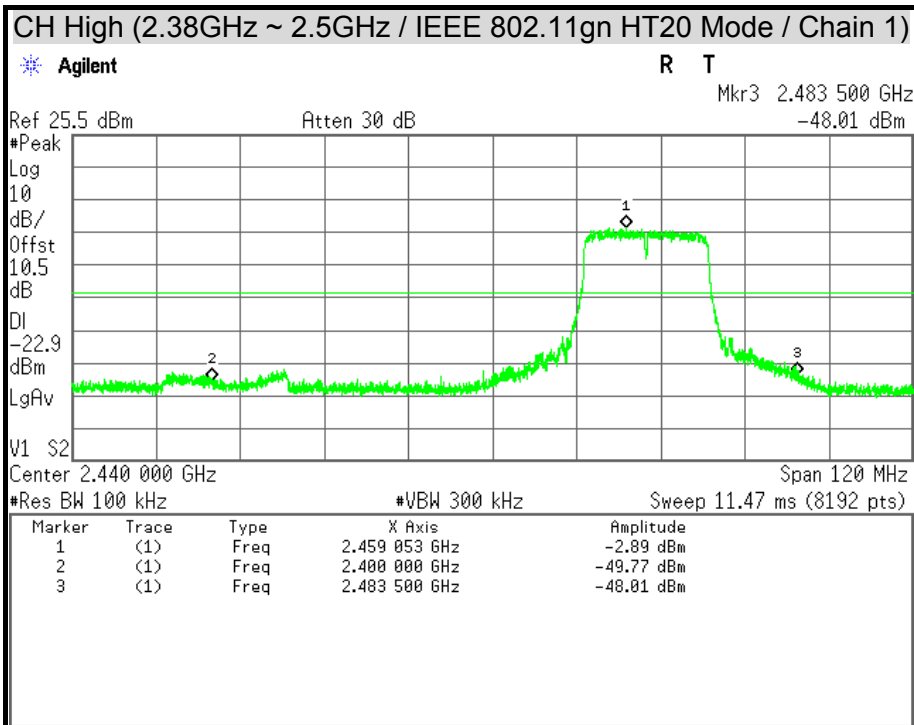


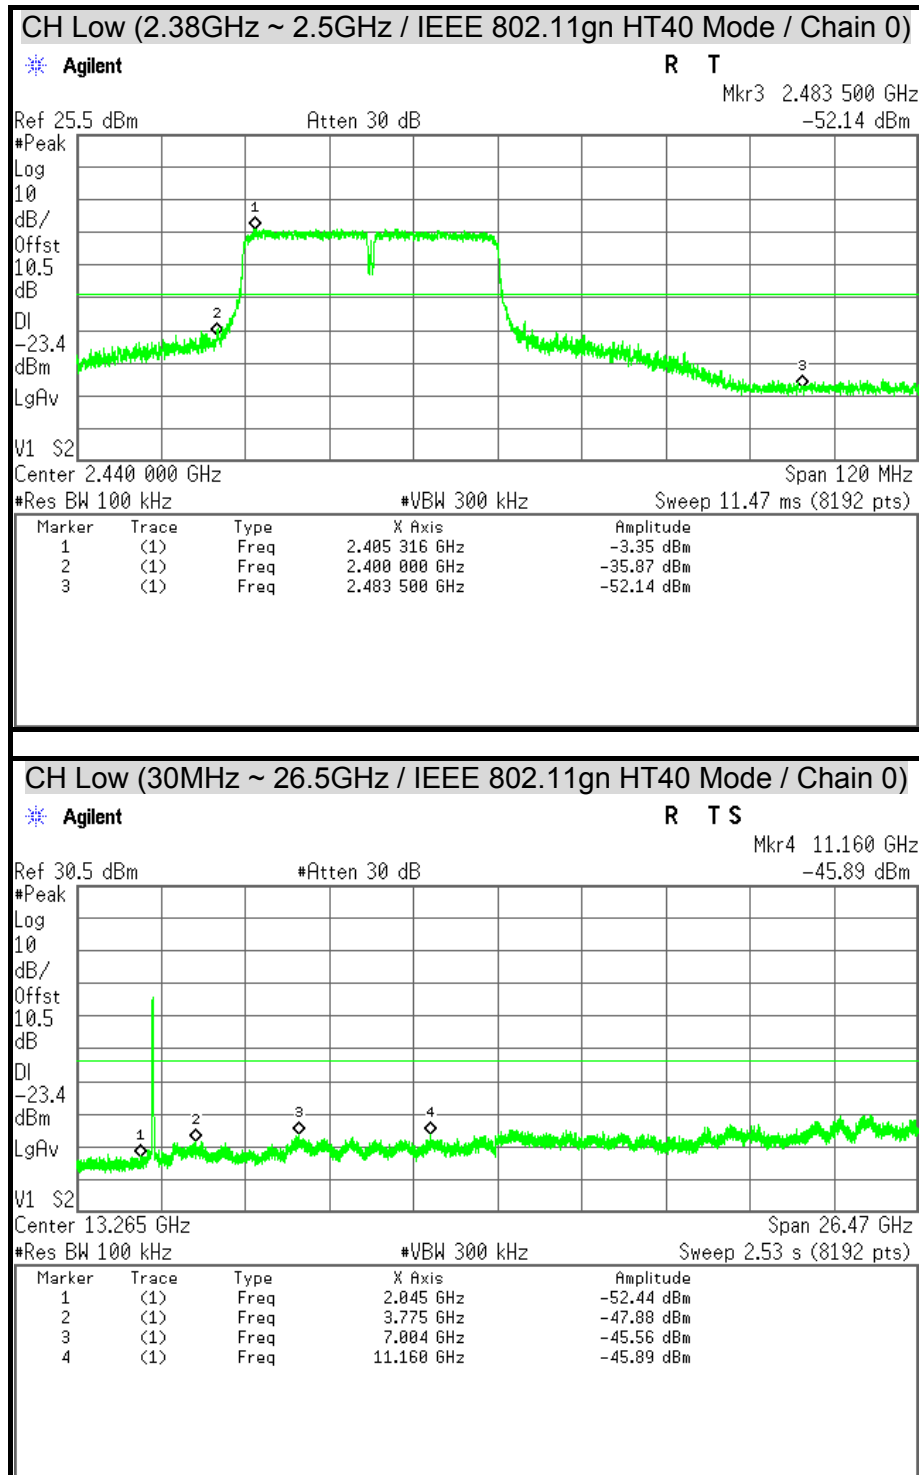


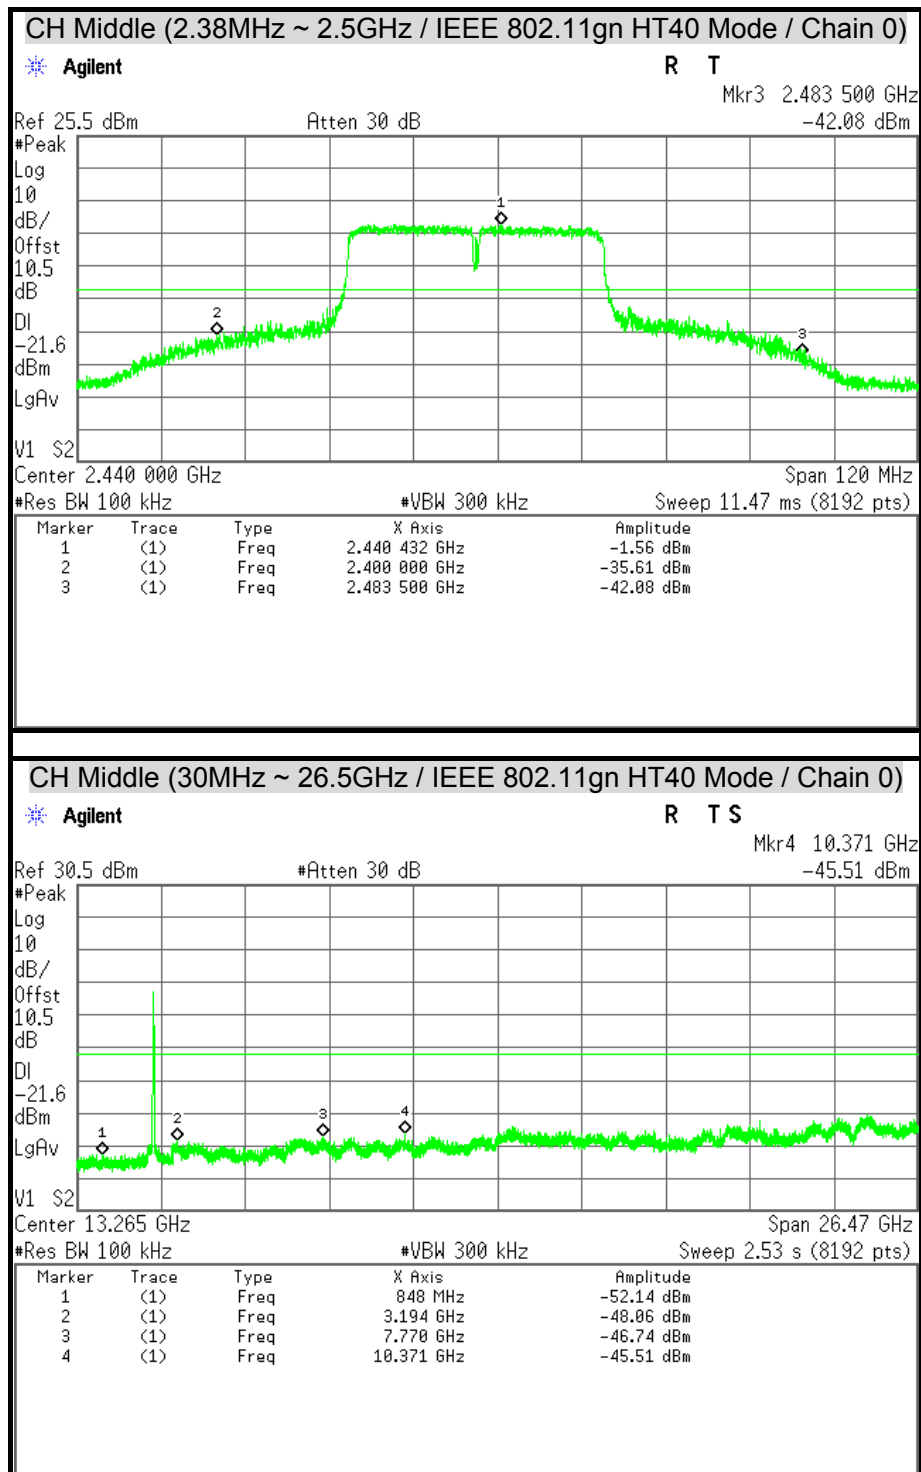

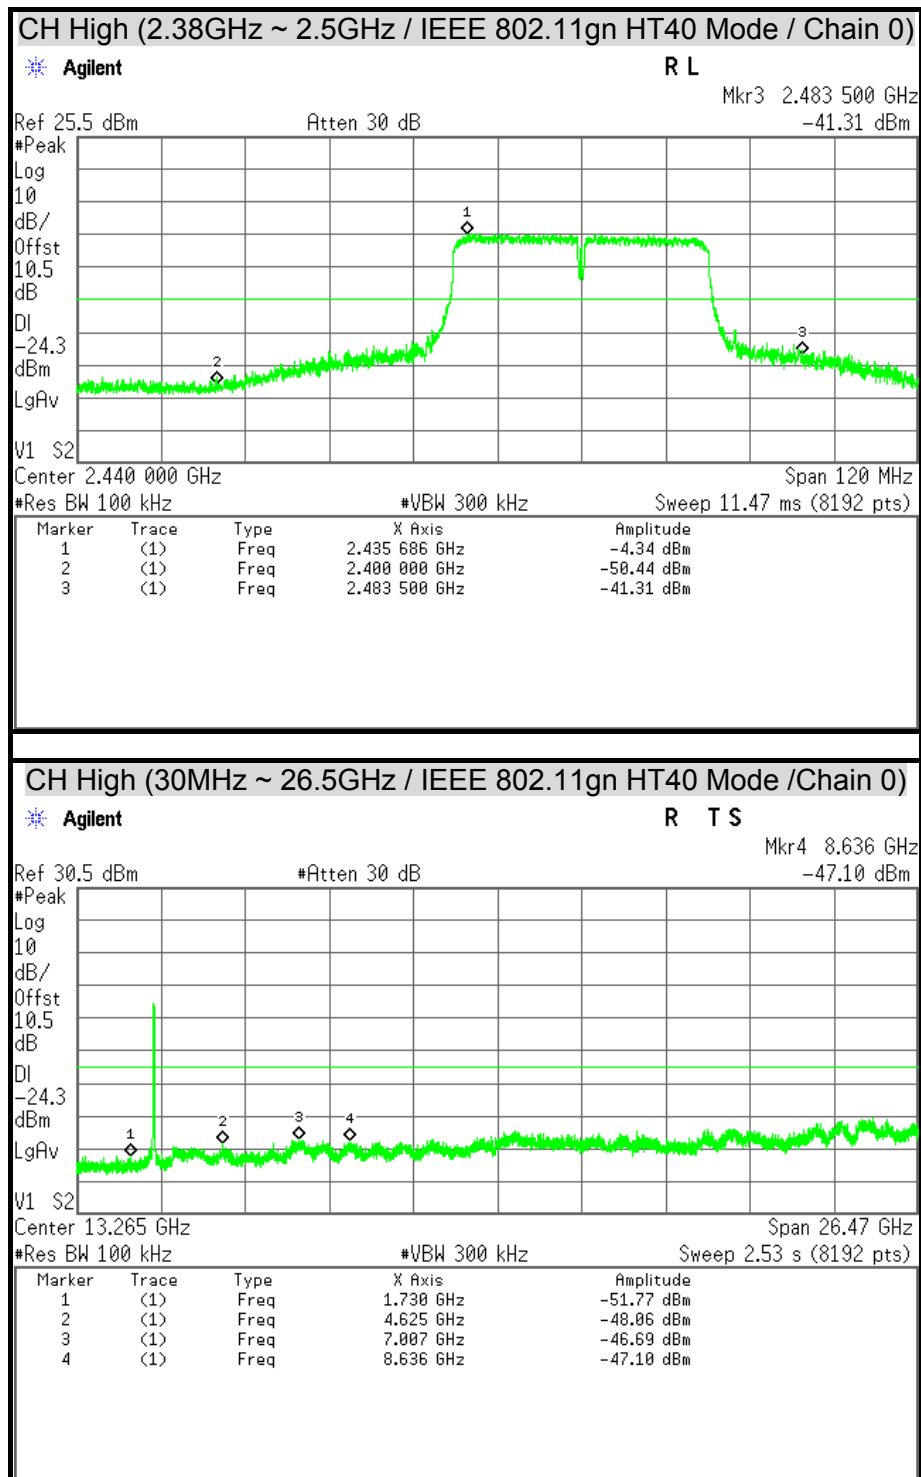

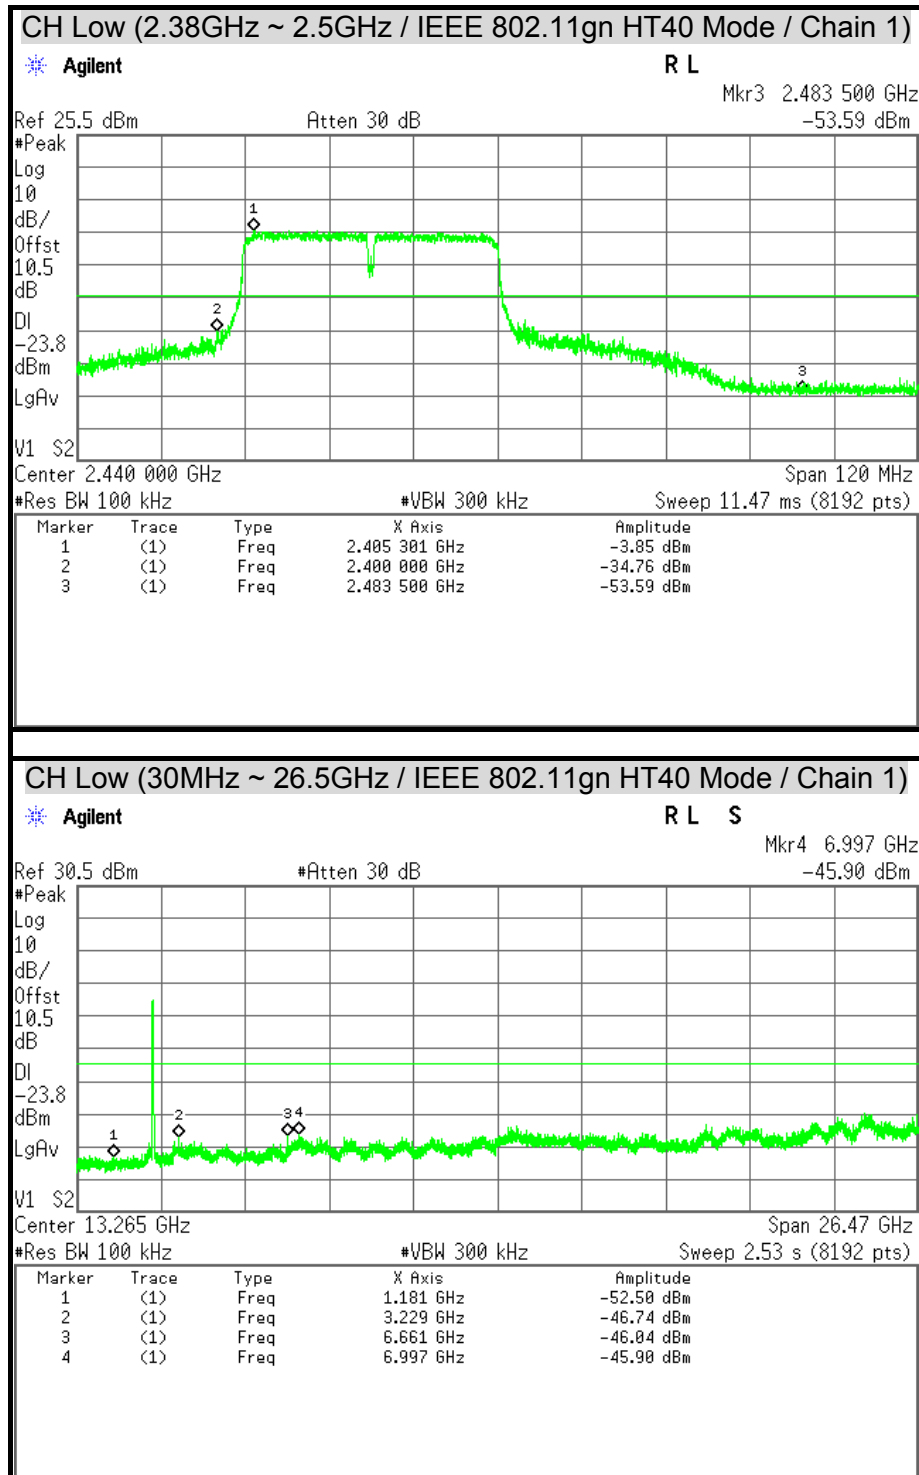

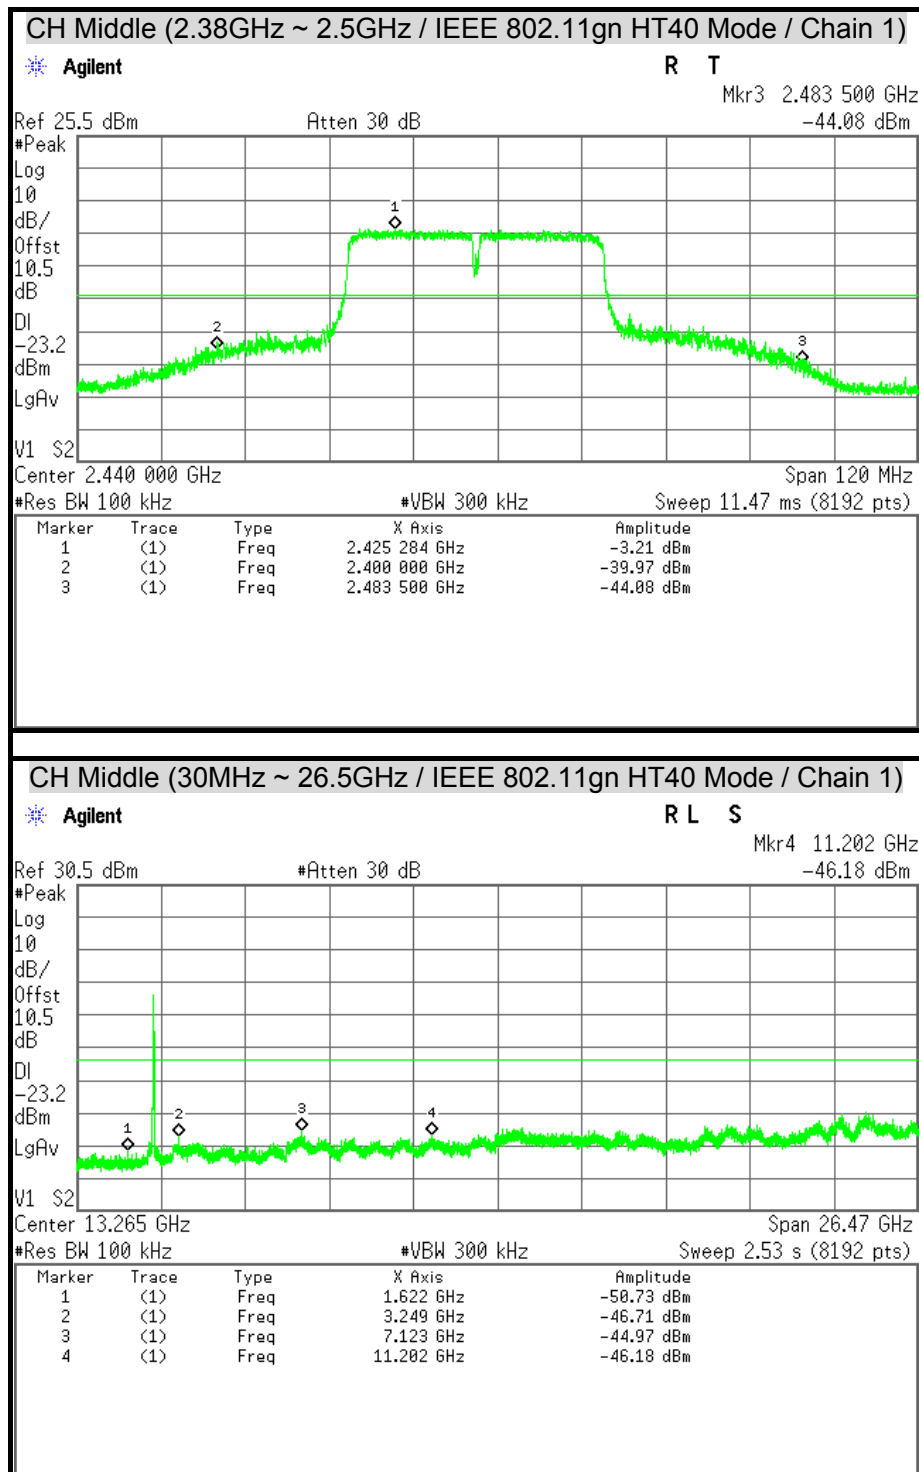

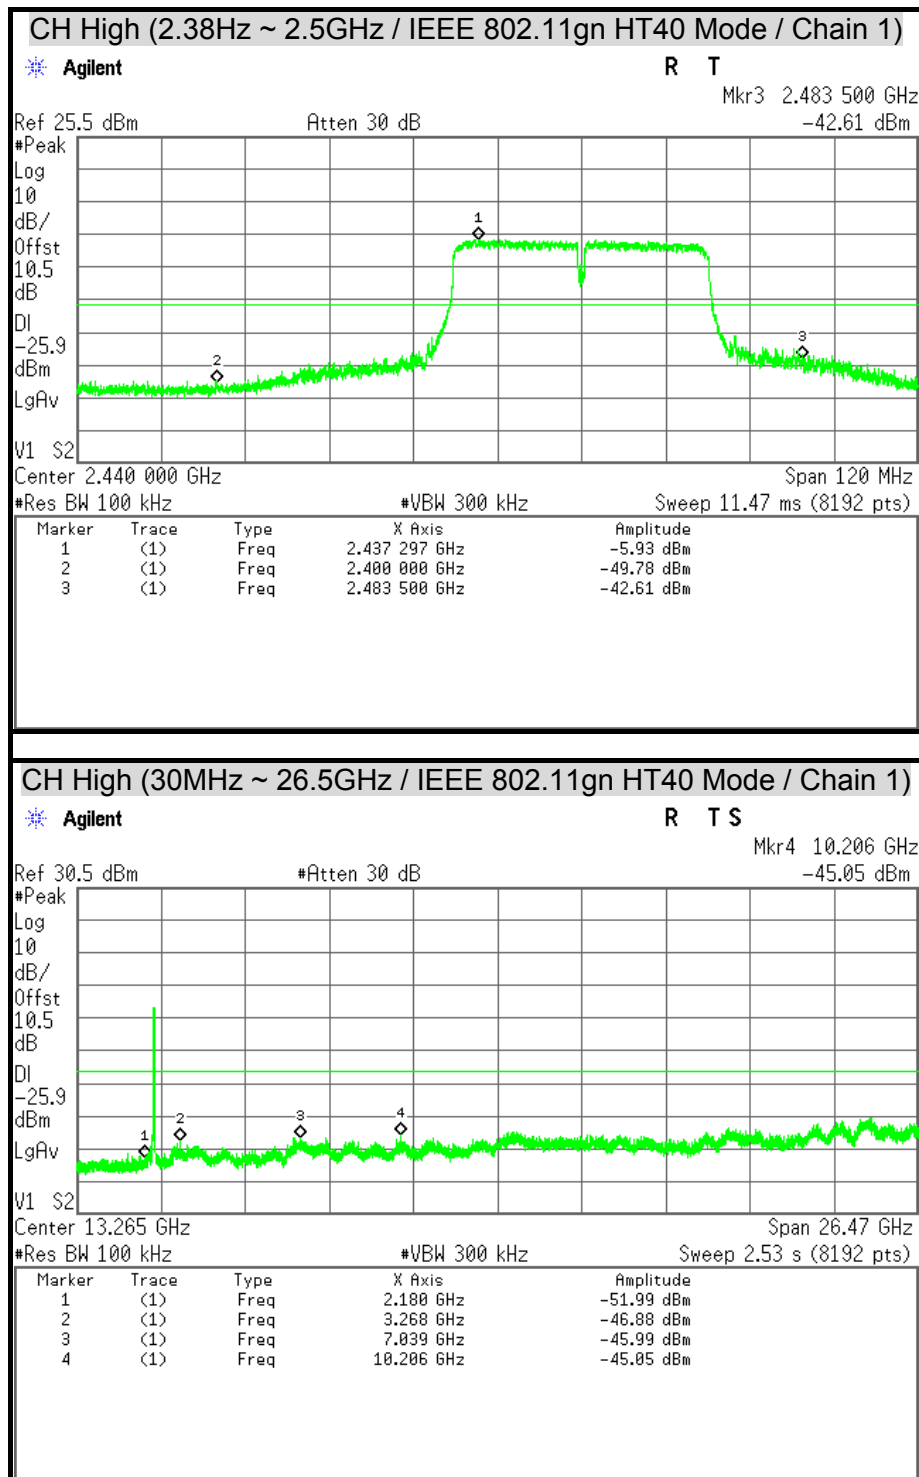



7.6 RADIATED EMISSION

LIMITS

- (1) According to § 15.205 (a) Except as shown in paragraph (d) of this section, only spurious emissions are permitted in any of the frequency bands listed below:

MHz	MHz	MHz	GHz
0.090 - 0.110	16.42 - 16.423	399.9 - 410	4.5 - 5.15
¹ 0.495 - 0.505	16.69475 - 16.69525	608 - 614	5.35 - 5.46
2.1735 - 2.1905	16.80425 - 16.80475	960 - 1240	7.25 - 7.75
4.125 - 4.128	25.5 - 25.67	1300 - 1427	8.025 - 8.5
4.17725 - 4.17775	37.5 - 38.25	1435 - 1626.5	9.0 - 9.2
4.20725 - 4.20775	73 - 74.6	1645.5 - 1646.5	9.3 - 9.5
6.215 - 6.218	74.8 - 75.2	1660 - 1710	10.6 - 12.7
6.26775 - 6.26825	108 - 121.94	1718.8 - 1722.2	13.25 - 13.4
6.31175 - 6.31225	123 - 138	2200 - 2300	14.47 - 14.5
8.291 - 8.294	149.9 - 150.05	2310 - 2390	15.35 - 16.2
8.362 - 8.366	156.52475 - 156.52525	2483.5 - 2500	17.7 - 21.4
8.37625 - 8.38675	156.7 - 156.9	2655 - 2900	22.01 - 23.12
8.41425 - 8.41475	162.0125 - 167.17	3260 - 3267	23.6 - 24.0
12.29 - 12.293	167.72 - 173.2	3332 - 3339	31.2 - 31.8
12.51975 - 12.52025	240 - 285	3345.8 - 3338	36.43 - 36.5
12.57675 - 12.57725	322 - 335.4	3600 - 4400	(²)
13.36 - 13.41			

Remark:

1. ¹ Until February 1, 1999, this restricted band shall be 0.490-0.510 MHz.
2. ² Above 38.6

- (2) According to § 15.205 (b) Except as provided in paragraphs (d) and (e), the field strength of emissions appearing within these frequency bands shall not exceed the limits shown in Section 15.209. At frequencies equal to or less than 1000 MHz, compliance with the limits in Section 15.209 shall be demonstrated using measurement instrumentation employing a CISPR quasi-peak detector. Above 1000 MHz, compliance with the emission limits in Section 15.209 shall be demonstrated based on the average value of the measured emissions. The provisions in Section 15.35 apply to these measurements.



- (3) According to § 15.209 (a) Except as provided elsewhere in this Subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table :

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 – 0.490	2400/F(KHz)	300
0.490 – 1.705	24000/F(KHz)	30
1.705 – 30.0	30	30
30 - 88	100 **	3
88 - 216	150 **	3
216 - 960	200 **	3
Above 960	500	3

Remark: **Except as provided in paragraph (g), fundamental emissions from intentional radiators operating under this Section shall not be located in the frequency bands 54-72 MHz, 76-88 MHz, 174-216 MHz or 470-806 MHz. However, operation within these frequency bands is permitted under other sections of this Part, e.g., Sections 15.231 and 15.241.

- (4) According to § 15.209 (b) In the emission table above, the tighter limit applies at the band edges.

TEST EQUIPMENT

Radiated Emission / 966Chamber_B

Name of Equipment	Manufacture	Model	Serial Number	Calibration Due
Spectrum Analyzer	Agilent	E4446A	MY46180323	04/15/2015
EMI Test Receiver	ROHDE & SCHWARZ	ESCS 30	835418/008	10/16/2014
Bi-log Antenna	SCHWARZBECK	VULB 9168	9168-250	09/12/2014
Broad-Band Horn Antenna	SCHWARZBECK	BBHA 9120 D	9120D-778	09/12/2014
Double-Ridged Waveguide Horn	ETS-LINDGREN	3117	00078733	12/05/2014
Horn Antenna	COM-POWER	AH-840	03077	12/18/2014
Pre-Amplifier	Agilent	8447D	2944A10052	07/16/2014
Pre-Amplifier	Agilent	8449B	3008A01916	07/16/2014
LOOP Antenna	EMCO	6502	8905-2356	08/20/2014
Notch Filters Band Reject	Micro-Tronics	BRM05702-01	026	N.C.R


Remark: 1. Each piece of equipment is scheduled for calibration once a year.
2. N.C.R = No Calibration Request.




TEST SETUP

The diagram below shows the test setup that is utilized to make the measurements for emission below 1GHz.

9kHz ~ 30MHz

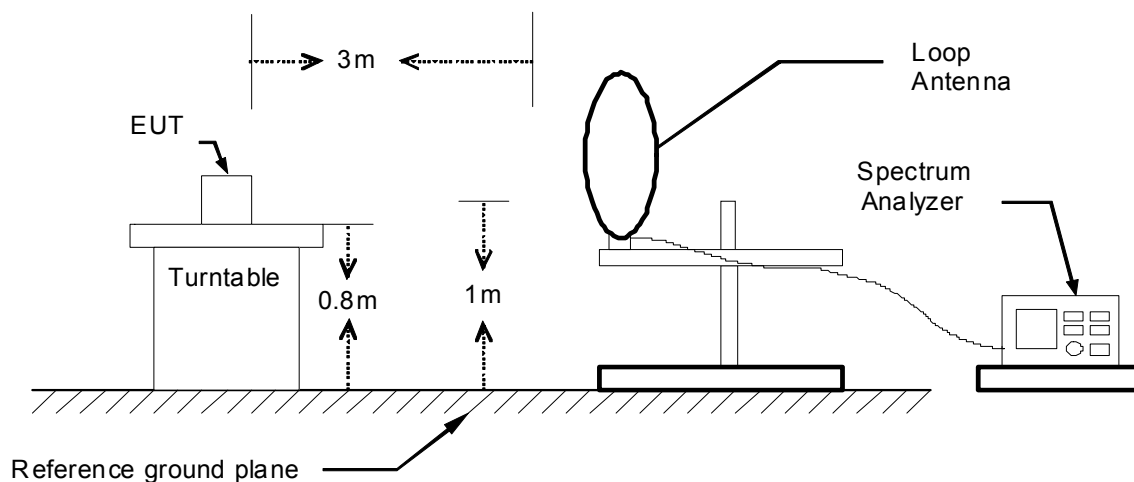


30MHz ~ 1GHz

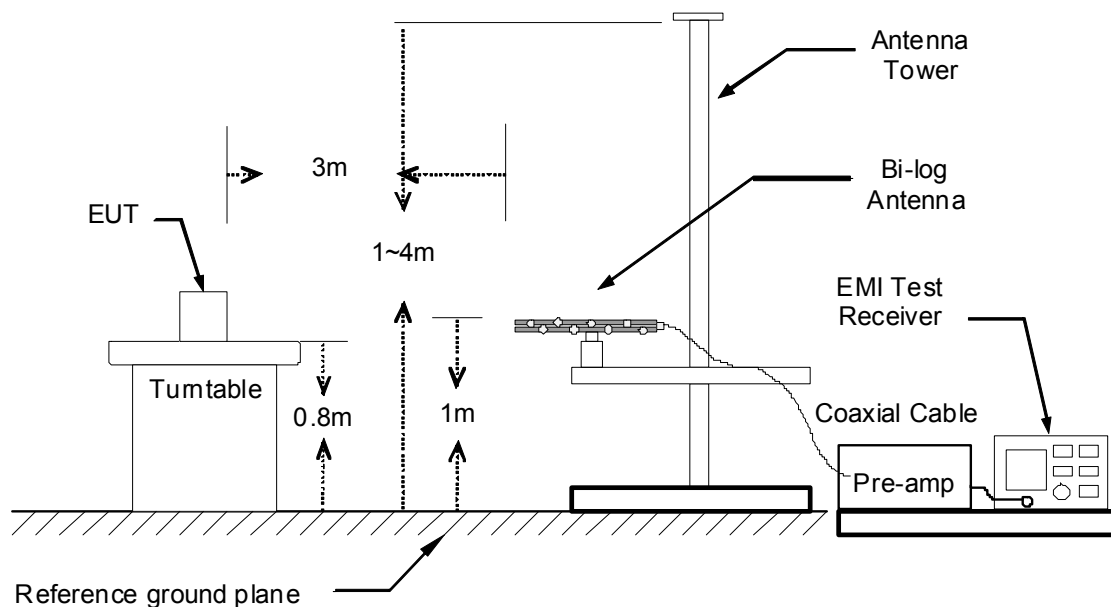



The diagram below shows the test setup that is utilized to make the measurements for emission above 1GHz.

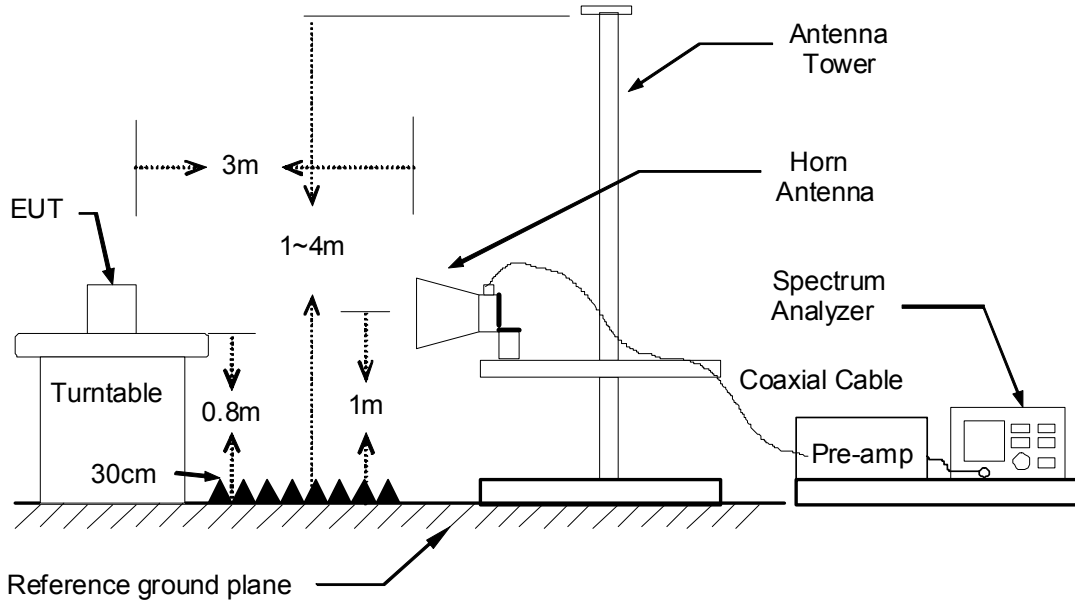



TEST PROCEDURE

1. The EUT was placed on the top of a rotating table 0.8 meters above the ground. The table was rotated 360 degrees to determine the position of the highest radiation.
2. While measuring the radiated emission below 1GHz, the EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower. While measuring the radiated emission above 1GHz, the EUT was set 3 meters away from the interference-receiving antenna.
3. The antenna is a broadband antenna, and its height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarization of the antenna are set to make the measurement.
4. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the table was turned from 0 degrees to 360 degrees to find the maximum reading.
5. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
6. If the emission level of the EUT in peak mode was 10 dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10 dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.

Remark :

1. *The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120 KHz for Peak detection (PK) and Quasi-peak detection (QP) at frequency below 1GHz.*
2. *The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 1 MHz for Peak detection and frequency above 1GHz.*
3. *The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 10 Hz for Average detection (AV) at frequency above 1GHz.*

**TEST RESULTS****Below 1 GHz (9kHz ~ 30MHz)**

No emission found between lowest internal used/generated frequency to 30MHz.

Below 1 GHz (30MHz ~ 1GHz)

Product Name	VoIP Wireless-N VPN Broadband Router	Test By	Rex Chiu
Test Model	BiPAC 6300VNP , BEC VG2600	Test Date	2014/05/27
Test Mode	Normal Operating / Power Adapter 1	Temp. & Humidity	28°C, 58%

966 Chamber_B at 3Meter / Horizontal						
Frequency (MHz)	Reading (dBμV)	Correction Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Remark
136.70	47.22	-14.29	32.93	43.50	-10.57	Peak
250.19	58.20	-13.71	44.49	46.00	-1.51	QP
375.32	50.45	-10.40	40.05	46.00	-5.95	Peak
624.61	45.82	-5.81	40.02	46.00	-5.98	Peak
749.74	44.40	-3.58	40.82	46.00	-5.18	Peak
874.87	40.22	-1.64	38.58	46.00	-7.42	Peak
960.23	44.69	-0.40	44.29	54.00	-9.71	Peak
966 Chamber_B at 3Meter / Vertical						
Frequency (MHz)	Reading (dBμV)	Correction Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Remark
47.46	49.47	-13.93	35.55	40.00	-4.45	Peak
138.64	50.46	-14.08	36.38	43.50	-7.12	Peak
250.19	55.43	-13.71	41.72	46.00	-4.28	Peak
375.32	52.52	-10.40	42.11	46.00	-3.89	QP
624.61	43.19	-5.81	37.38	46.00	-8.62	Peak
874.87	40.68	-1.64	39.04	46.00	-6.96	Peak
960.23	37.34	-0.40	36.94	54.00	-17.06	Peak

Remark:

1. Quasi-peak test would be performed if the peak result were greater than the quasi-peak limit.
2. Data of measurement within this frequency range shown " --- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
3. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) – PreAmp.Gain (dB)
4. Result (dBμV/m) = Reading (dBμV) + Correction Factor (dB/m)
5. Margin (dB) = Remark result (dBμV/m) - Quasi-peak limit (dBμV/m)



Product Name	VoIP Wireless-N VPN Broadband Router	Test By	Rex Chiu
Test Model	BiPAC 6300VNP , BEC VG2600	Test Date	2014/06/14
Test Mode	Normal Operating / Power Adapter 2	Temp. & Humidity	25°C, 60%

966 Chamber_B at 3Meter / Horizontal						
Frequency (MHz)	Reading (dBμV)	Correction Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Remark
250.19	47.55	-13.71	33.84	46.00	-12.16	Peak
419.94	38.82	-9.50	29.32	46.00	-16.68	Peak
600.36	39.41	-5.89	33.53	46.00	-12.47	Peak
624.61	44.62	-5.81	38.81	46.00	-7.19	Peak
839.95	36.88	-2.31	34.57	46.00	-11.43	Peak
874.87	39.46	-1.64	37.82	46.00	-8.18	Peak
960.23	41.48	-0.40	41.08	54.00	-12.92	Peak
966 Chamber_B at 3Meter / Vertical						
Frequency (MHz)	Reading (dBμV)	Correction Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Remark
160.95	38.04	-13.46	24.58	43.50	-18.92	Peak
250.19	46.89	-13.71	33.18	46.00	-12.82	Peak
375.32	41.81	-10.40	31.41	46.00	-14.59	Peak
583.87	40.96	-6.38	34.57	46.00	-11.43	Peak
624.61	42.74	-5.81	36.94	46.00	-9.06	Peak
874.87	37.59	-1.64	35.95	46.00	-10.05	Peak
960.23	36.04	-0.40	35.64	54.00	-18.36	Peak

Remark:

1. Quasi-peak test would be performed if the peak result were greater than the quasi-peak limit.
2. Data of measurement within this frequency range shown " --- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
3. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) – PreAmp.Gain (dB)
4. Result (dBμV/m) = Reading (dBμV) + Correction Factor (dB/m)
5. Margin (dB) = Remark result (dBμV/m) - Quasi-peak limit (dBμV/m)



Above 1 GHz

Product Name	VoIP Wireless-N VPN Broadband Router	Test By	Rex Chiu
Test Model	BiPAC 6300VNP , BEC VG2600	Test Date	2014/05/28
Test Mode	IEEE 802.11b TX / CH Low	Temp. & Humidity	28°C, 58%

966 Chamber_B at 3Meter / Horizontal									
Frequency (MHz)	Reading-PK (dBuV)	Reading-AV (dBuV)	Correction Factor (dB/m)	Result-PK (dBuV/m)	Result-AV (dBuV/m)	Limit-PK (dBuV/m)	Limit-AV (dBuV/m)	Margin (dB)	Remark
1216.00	54.81	---	-2.89	51.92	---	74.00	54.00	-2.08	Peak
1344.00	54.01	---	-2.89	51.11	---	74.00	54.00	-2.89	Peak
1564.00	53.99	---	-2.30	51.69	---	74.00	54.00	-2.31	Peak
3165.00	42.08	---	4.22	46.29	---	74.00	54.00	-7.71	Peak
4830.00	47.53	44.99	8.09	55.62	53.08	74.00	54.00	-0.92	AVG
7230.00	38.61	---	12.84	51.45	---	74.00	54.00	-2.55	Peak
966 Chamber_B at 3Meter / Vertical									
Frequency (MHz)	Reading-PK (dBuV)	Reading-AV (dBuV)	Correction Factor (dB/m)	Result-PK (dBuV/m)	Result-AV (dBuV/m)	Limit-PK (dBuV/m)	Limit-AV (dBuV/m)	Margin (dB)	Remark
1210.00	53.61	---	-2.89	50.72	---	74.00	54.00	-3.28	Peak
1520.00	54.07	---	-2.71	51.35	---	74.00	54.00	-2.65	Peak
1690.00	52.67	---	-1.11	51.57	---	74.00	54.00	-2.43	Peak
3210.00	44.56	---	4.25	48.82	---	74.00	54.00	-5.18	Peak
4830.00	43.79	44.54	8.09	51.88	52.63	74.00	54.00	-1.37	AVG
7230.00	38.32	---	12.84	51.16	---	74.00	54.00	-2.84	Peak

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Average test would be performed if the peak result were greater than the average limit.
3. Data of measurement within this frequency range shown " --- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
4. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
5. Result = Reading + Correction Factor
Margin = Result - Limit
Remark Peak = Result(PK) - Limit(AV)
Remark AVG = Result(AV) - Limit(AV)



Product Name	VoIP Wireless-N VPN Broadband Router	Test By	Rex Chiu
Test Model	BiPAC 6300VNP , BEC VG2600	Test Date	2014/05/28
Test Mode	IEEE 802.11b TX / CH Middle	Temp. & Humidity	28°C, 58%

966 Chamber_B at 3Meter / Horizontal									
Frequency (MHz)	Reading-PK (dBuV)	Reading-AV (dBuV)	Correction Factor (dB/m)	Result-PK (dBuV/m)	Result-AV (dBuV/m)	Limit-PK (dBuV/m)	Limit-AV (dBuV/m)	Margin (dB)	Remark
1246.00	54.62	---	-2.89	51.73	---	74.00	54.00	-2.27	Peak
1398.00	54.02	---	-2.90	51.13	---	74.00	54.00	-2.87	Peak
1532.00	53.33	---	-2.60	50.73	---	74.00	54.00	-3.27	Peak
3975.00	40.88	---	5.79	46.67	---	74.00	54.00	-7.33	Peak
4875.00	47.65	45.56	8.18	55.83	53.74	74.00	54.00	-0.26	AVG
6150.00	39.38	---	11.24	50.62	---	74.00	54.00	-3.38	Peak
7320.00	38.04	---	13.12	51.16	---	74.00	54.00	-2.84	Peak
966 Chamber_B at 3Meter / Vertical									
Frequency (MHz)	Reading-PK (dBuV)	Reading-AV (dBuV)	Correction Factor (dB/m)	Result-PK (dBuV/m)	Result-AV (dBuV/m)	Limit-PK (dBuV/m)	Limit-AV (dBuV/m)	Margin (dB)	Remark
1186.00	54.26	---	-2.89	51.37	---	74.00	54.00	-2.63	Peak
1524.00	54.19	---	-2.67	51.52	---	74.00	54.00	-2.48	Peak
2356.00	58.58	49.31	2.52	61.10	51.83	74.00	54.00	-2.17	AVG
3255.00	43.99	---	4.29	48.28	---	74.00	54.00	-5.72	Peak
4875.00	46.57	44.24	8.18	54.75	52.42	74.00	54.00	-1.58	AVG
7305.00	38.32	---	13.08	51.39	---	74.00	54.00	-2.61	Peak

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Average test would be performed if the peak result were greater than the average limit.
3. Data of measurement within this frequency range shown " --- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
4. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
5. Result = Reading + Correction Factor
Margin = Result - Limit
Remark Peak = Result(PK) - Limit(AV)
Remark AVG = Result(AV) - Limit(AV)



Product Name	VoIP Wireless-N VPN Broadband Router	Test By	Rex Chiu
Test Model	BiPAC 6300VNP , BEC VG2600	Test Date	2014/05/28
Test Mode	IEEE 802.11b TX / CH High	Temp. & Humidity	28°C, 58%

966 Chamber_B at 3Meter / Horizontal									
Frequency (MHz)	Reading-PK (dBuV)	Reading-AV (dBuV)	Correction Factor (dB/m)	Result-PK (dBuV/m)	Result-AV (dBuV/m)	Limit-PK (dBuV/m)	Limit-AV (dBuV/m)	Margin (dB)	Remark
1266.00	54.53	---	-2.89	51.64	---	74.00	54.00	-2.36	Peak
1442.00	53.46	---	-2.90	50.56	---	74.00	54.00	-3.44	Peak
1878.00	51.16	---	0.67	51.83	---	74.00	54.00	-2.17	Peak
3090.00	41.74	---	4.15	45.90	---	74.00	54.00	-8.10	Peak
4920.00	50.44	45.16	8.28	58.72	53.44	74.00	54.00	-0.56	AVG
7380.00	38.60	---	13.31	51.91	---	74.00	54.00	-2.09	Peak
966 Chamber_B at 3Meter / Vertical									
Frequency (MHz)	Reading-PK (dBuV)	Reading-AV (dBuV)	Correction Factor (dB/m)	Result-PK (dBuV/m)	Result-AV (dBuV/m)	Limit-PK (dBuV/m)	Limit-AV (dBuV/m)	Margin (dB)	Remark
1276.00	53.70	---	-2.89	50.81	---	74.00	54.00	-3.19	Peak
1412.00	53.24	---	-2.90	50.34	---	74.00	54.00	-3.66	Peak
1688.00	52.65	---	-1.13	51.52	---	74.00	54.00	-2.48	Peak
3285.00	42.06	---	4.31	46.38	---	74.00	54.00	-7.62	Peak
4920.00	49.44	44.92	8.28	57.72	53.2	74.00	54.00	-0.80	AVG
7395.00	38.18	---	13.35	51.53	---	74.00	54.00	-2.47	Peak

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Average test would be performed if the peak result were greater than the average limit.
3. Data of measurement within this frequency range shown " --- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
4. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
5. Result = Reading + Correction Factor
 Margin = Result - Limit
 Remark Peak = Result(PK) - Limit(AV)
 Remark AVG = Result(AV) - Limit(AV)



Product Name	VoIP Wireless-N VPN Broadband Router	Test By	Rex Chiu
Test Model	BiPAC 6300VNP , BEC VG2600	Test Date	2014/05/28
Test Mode	IEEE 802.11g TX / CH Low	Temp. & Humidity	28°C, 58%

966 Chamber_B at 3Meter / Horizontal									
Frequency (MHz)	Reading-PK (dBuV)	Reading-AV (dBuV)	Correction Factor (dB/m)	Result-PK (dBuV/m)	Result-AV (dBuV/m)	Limit-PK (dBuV/m)	Limit-AV (dBuV/m)	Margin (dB)	Remark
1186.00	53.12	---	-2.89	50.23	---	74.00	54.00	-3.77	Peak
1356.00	54.21	---	-2.89	51.31	---	74.00	54.00	-2.69	Peak
1516.00	53.95	---	-2.75	51.20	---	74.00	54.00	-2.80	Peak
3210.00	41.90	---	4.25	46.15	---	74.00	54.00	-7.85	Peak
4830.00	38.42	---	8.09	46.51	---	74.00	54.00	-7.49	Peak
7320.00	38.27	---	13.12	51.39	---	74.00	54.00	-2.61	Peak
966 Chamber_B at 3Meter / Vertical									
Frequency (MHz)	Reading-PK (dBuV)	Reading-AV (dBuV)	Correction Factor (dB/m)	Result-PK (dBuV/m)	Result-AV (dBuV/m)	Limit-PK (dBuV/m)	Limit-AV (dBuV/m)	Margin (dB)	Remark
1186.00	54.31	---	-2.89	51.42	---	74.00	54.00	-2.58	Peak
1334.00	53.66	---	-2.89	50.77	---	74.00	54.00	-3.23	Peak
1636.00	53.53	---	-1.62	51.92	---	74.00	54.00	-2.08	Peak
3210.00	45.66	---	4.25	49.91	---	74.00	54.00	-4.09	Peak
4830.00	39.09	---	8.09	47.18	---	74.00	54.00	-6.82	Peak
7230.00	37.80	---	12.84	50.64	---	74.00	54.00	-3.36	Peak

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Average test would be performed if the peak result were greater than the average limit.
3. Data of measurement within this frequency range shown " --- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
4. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
5. Result = Reading + Correction Factor
 Margin = Result – Limit
 Remark Peak = Result(PK) – Limit(AV)
 Remark AVG = Result(AV) – Limit(AV)



Product Name	VoIP Wireless-N VPN Broadband Router	Test By	Rex Chiu
Test Model	BiPAC 6300VNP , BEC VG2600	Test Date	2014/05/28
Test Mode	IEEE 802.11g TX / CH Middle	Temp. & Humidity	28°C, 58%

966 Chamber_B at 3Meter / Horizontal									
Frequency (MHz)	Reading-PK (dBuV)	Reading-AV (dBuV)	Correction Factor (dB/m)	Result-PK (dBuV/m)	Result-AV (dBuV/m)	Limit-PK (dBuV/m)	Limit-AV (dBuV/m)	Margin (dB)	Remark
1232.00	53.73	---	-2.89	50.84	---	74.00	54.00	-3.16	Peak
1308.00	54.20	---	-2.89	51.31	---	74.00	54.00	-2.69	Peak
1560.00	54.02	---	-2.33	51.69	---	74.00	54.00	-2.31	Peak
3255.00	41.75	---	4.29	46.04	---	74.00	54.00	-7.96	Peak
4875.00	39.26	---	8.18	47.44	---	74.00	54.00	-6.56	Peak
7320.00	37.86	---	13.12	50.98	---	74.00	54.00	-3.02	Peak
966 Chamber_B at 3Meter / Vertical									
Frequency (MHz)	Reading-PK (dBuV)	Reading-AV (dBuV)	Correction Factor (dB/m)	Result-PK (dBuV/m)	Result-AV (dBuV/m)	Limit-PK (dBuV/m)	Limit-AV (dBuV/m)	Margin (dB)	Remark
1392.00	53.60	---	-2.90	50.71	---	74.00	54.00	-3.29	Peak
2384.00	61.68	51.31	2.58	64.26	53.89	74.00	54.00	-0.11	AVG
2490.00	61.78	50.94	2.79	64.57	53.73	74.00	54.00	-0.27	AVG
3255.00	45.95	---	4.29	50.23	---	74.00	54.00	-3.77	Peak
4875.00	39.48	---	8.18	47.66	---	74.00	54.00	-6.34	Peak
7320.00	38.24	---	13.12	51.36	---	74.00	54.00	-2.64	Peak

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Average test would be performed if the peak result were greater than the average limit.
3. Data of measurement within this frequency range shown " --- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
4. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
5. Result = Reading + Correction Factor
 Margin = Result - Limit
 Remark Peak = Result(PK) - Limit(AV)
 Remark AVG = Result(AV) - Limit(AV)



Product Name	VoIP Wireless-N VPN Broadband Router	Test By	Rex Chiu
Test Model	BiPAC 6300VNP , BEC VG2600	Test Date	2014/05/28
Test Mode	IEEE 802.11g TX / CH High	Temp. & Humidity	28°C, 58%

966 Chamber_B at 3Meter / Horizontal									
Frequency (MHz)	Reading-PK (dBuV)	Reading-AV (dBuV)	Correction Factor (dB/m)	Result-PK (dBuV/m)	Result-AV (dBuV/m)	Limit-PK (dBuV/m)	Limit-AV (dBuV/m)	Margin (dB)	Remark
1408.00	53.26	---	-2.90	50.36	---	74.00	54.00	-3.64	Peak
1506.00	53.60	---	-2.84	50.75	---	74.00	54.00	-3.25	Peak
1718.00	52.70	---	-0.84	51.86	---	74.00	54.00	-2.14	Peak
3345.00	42.16	---	4.36	46.53	---	74.00	54.00	-7.47	Peak
4935.00	39.68	---	8.31	47.98	---	74.00	54.00	-6.02	Peak
7365.00	38.12	---	13.26	51.38	---	74.00	54.00	-2.62	Peak
966 Chamber_B at 3Meter / Vertical									
Frequency (MHz)	Reading-PK (dBuV)	Reading-AV (dBuV)	Correction Factor (dB/m)	Result-PK (dBuV/m)	Result-AV (dBuV/m)	Limit-PK (dBuV/m)	Limit-AV (dBuV/m)	Margin (dB)	Remark
1356.00	52.86	---	-2.89	49.97	---	74.00	54.00	-4.03	Peak
1612.00	53.83	---	-1.84	51.98	---	74.00	54.00	-2.02	Peak
2384.00	56.62	44.21	2.58	59.20	46.79	74.00	54.00	-7.21	AVG
3285.00	42.78	---	4.31	47.10	---	74.00	54.00	-6.90	Peak
4965.00	40.49	---	8.37	48.85	---	74.00	54.00	-5.15	Peak
7380.00	38.53	---	13.31	51.84	---	74.00	54.00	-2.16	Peak

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Average test would be performed if the peak result were greater than the average limit.
3. Data of measurement within this frequency range shown " --- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
4. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
5. Result = Reading + Correction Factor
 Margin = Result – Limit
 Remark Peak = Result(PK) – Limit(AV)
 Remark AVG = Result(AV) – Limit(AV)



Product Name	VoIP Wireless-N VPN Broadband Router	Test By	Rex Chiu
Test Model	BiPAC 6300VNP , BEC VG2600	Test Date	2014/05/29
Test Mode	IEEE 802.11gn HT20 TX / CH Low	Temp. & Humidity	27°C, 58%

966 Chamber_B at 3Meter / Horizontal									
Frequency (MHz)	Reading-PK (dBuV)	Reading-AV (dBuV)	Correction Factor (dB/m)	Result-PK (dBuV/m)	Result-AV (dBuV/m)	Limit-PK (dBuV/m)	Limit-AV (dBuV/m)	Margin (dB)	Remark
1246.00	54.06	---	-2.89	51.17	---	74.00	54.00	-2.83	Peak
1388.00	53.50	---	-2.90	50.61	---	74.00	54.00	-3.39	Peak
1624.00	52.22	---	-1.73	50.49	---	74.00	54.00	-3.51	Peak
3210.00	42.74	---	4.25	46.99	---	74.00	54.00	-7.01	Peak
4830.00	39.14	---	8.09	47.23	---	74.00	54.00	-6.77	Peak
7230.00	38.09	---	12.84	50.93	---	74.00	54.00	-3.07	Peak
966 Chamber_B at 3Meter / Vertical									
Frequency (MHz)	Reading-PK (dBuV)	Reading-AV (dBuV)	Correction Factor (dB/m)	Result-PK (dBuV/m)	Result-AV (dBuV/m)	Limit-PK (dBuV/m)	Limit-AV (dBuV/m)	Margin (dB)	Remark
1280.00	54.41	---	-2.89	51.52	---	74.00	54.00	-2.48	Peak
1386.00	53.59	---	-2.90	50.70	---	74.00	54.00	-3.30	Peak
1590.00	53.88	---	-2.05	51.83	---	74.00	54.00	-2.17	Peak
3210.00	46.39	---	4.25	50.64	---	74.00	54.00	-3.36	Peak
4830.00	38.55	---	8.09	46.64	---	74.00	54.00	-7.36	Peak
7230.00	38.59	---	12.84	51.43	---	74.00	54.00	-2.57	Peak

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Average test would be performed if the peak result were greater than the average limit.
3. Data of measurement within this frequency range shown " --- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
4. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
5. Result = Reading + Correction Factor
Margin = Result - Limit
Remark Peak = Result(PK) - Limit(AV)
Remark AVG = Result(AV) - Limit(AV)



Product Name	VoIP Wireless-N VPN Broadband Router	Test By	Rex Chiu
Test Model	BiPAC 6300VNP , BEC VG2600	Test Date	2014/05/29
Test Mode	IEEE 802.11gn HT20 TX / CH Middle	Temp. & Humidity	27°C, 58%

966 Chamber_B at 3Meter / Horizontal									
Frequency (MHz)	Reading-PK (dBuV)	Reading-AV (dBuV)	Correction Factor (dB/m)	Result-PK (dBuV/m)	Result-AV (dBuV/m)	Limit-PK (dBuV/m)	Limit-AV (dBuV/m)	Margin (dB)	Remark
1214.00	54.13	---	-2.89	51.24	---	74.00	54.00	-2.76	Peak
1336.00	53.60	---	-2.89	50.70	---	74.00	54.00	-3.30	Peak
1522.00	53.80	---	-2.69	51.10	---	74.00	54.00	-2.90	Peak
3120.00	42.75	---	4.18	46.93	---	74.00	54.00	-7.07	Peak
4875.00	39.31	---	8.18	47.50	---	74.00	54.00	-6.50	Peak
6120.00	38.49	---	11.15	49.64	---	74.00	54.00	-4.36	Peak
966 Chamber_B at 3Meter / Vertical									
Frequency (MHz)	Reading-PK (dBuV)	Reading-AV (dBuV)	Correction Factor (dB/m)	Result-PK (dBuV/m)	Result-AV (dBuV/m)	Limit-PK (dBuV/m)	Limit-AV (dBuV/m)	Margin (dB)	Remark
1424.00	53.20	---	-2.90	50.31	---	74.00	54.00	-3.69	Peak
2384.00	61.92	50.91	2.58	64.50	53.49	74.00	54.00	-0.51	AVG
2488.00	58.52	47.51	2.79	61.31	50.30	74.00	54.00	-3.70	AVG
3255.00	44.39	---	4.29	48.68	---	74.00	54.00	-5.32	Peak
4875.00	38.61	---	8.18	46.80	---	74.00	54.00	-7.20	Peak
5730.00	39.23	---	10.00	49.23	---	74.00	54.00	-4.77	Peak

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Average test would be performed if the peak result were greater than the average limit.
3. Data of measurement within this frequency range shown " --- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
4. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
5. Result = Reading + Correction Factor
Margin = Result - Limit
Remark Peak = Result(PK) - Limit(AV)
Remark AVG = Result(AV) - Limit(AV)



Product Name	VoIP Wireless-N VPN Broadband Router	Test By	Rex Chiu
Test Model	BiPAC 6300VNP , BEC VG2600	Test Date	2014/05/29
Test Mode	IEEE 802.11gn HT20 TX / CH High	Temp. & Humidity	27°C, 58%

966 Chamber_B at 3Meter / Horizontal									
Frequency (MHz)	Reading-PK (dBuV)	Reading-AV (dBuV)	Correction Factor (dB/m)	Result-PK (dBuV/m)	Result-AV (dBuV/m)	Limit-PK (dBuV/m)	Limit-AV (dBuV/m)	Margin (dB)	Remark
1228.00	54.42	---	-2.89	51.53	---	74.00	54.00	-2.47	Peak
1382.00	54.32	---	-2.90	51.42	---	74.00	54.00	-2.58	Peak
1672.00	53.49	---	-1.28	52.22	---	74.00	54.00	-1.78	Peak
3090.00	41.97	---	4.15	46.12	---	74.00	54.00	-7.88	Peak
4920.00	39.27	---	8.28	47.54	---	74.00	54.00	-6.46	Peak
5865.00	39.61	---	10.40	50.01	---	74.00	54.00	-3.99	Peak
966 Chamber_B at 3Meter / Vertical									
Frequency (MHz)	Reading-PK (dBuV)	Reading-AV (dBuV)	Correction Factor (dB/m)	Result-PK (dBuV/m)	Result-AV (dBuV/m)	Limit-PK (dBuV/m)	Limit-AV (dBuV/m)	Margin (dB)	Remark
1370.00	53.64	---	-2.89	50.75	---	74.00	54.00	-3.25	Peak
1488.00	53.65	---	-2.90	50.75	---	74.00	54.00	-3.25	Peak
1646.00	53.45	---	-1.52	51.93	---	74.00	54.00	-2.07	Peak
3285.00	42.89	---	4.31	47.21	---	74.00	54.00	-6.79	Peak
4920.00	39.88	---	8.28	48.15	---	74.00	54.00	-5.85	Peak
6510.00	39.51	---	12.27	51.78	---	74.00	54.00	-2.22	Peak

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Average test would be performed if the peak result were greater than the average limit.
3. Data of measurement within this frequency range shown " --- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
4. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
5. Result = Reading + Correction Factor
Margin = Result - Limit
Remark Peak = Result(PK) - Limit(AV)
Remark AVG = Result(AV) - Limit(AV)



Product Name	VoIP Wireless-N VPN Broadband Router	Test By	Rex Chiu
Test Model	BiPAC 6300VNP , BEC VG2600	Test Date	2014/06/12
Test Mode	IEEE 802.11gn HT40 TX / CH Low	Temp. & Humidity	27°C, 58%

966 Chamber_B at 3Meter / Horizontal									
Frequency (MHz)	Reading-PK (dBuV)	Reading-AV (dBuV)	Correction Factor (dB/m)	Result-PK (dBuV/m)	Result-AV (dBuV/m)	Limit-PK (dBuV/m)	Limit-AV (dBuV/m)	Margin (dB)	Remark
1270.00	53.84	---	-2.89	50.95	---	74.00	54.00	-3.05	Peak
1400.00	52.85	---	-2.90	49.95	---	74.00	54.00	-4.05	Peak
1560.00	52.58	---	-2.33	50.24	---	74.00	54.00	-3.76	Peak
3285.00	42.55	---	4.31	46.87	---	74.00	54.00	-7.13	Peak
4845.00	38.78	---	8.12	46.90	---	74.00	54.00	-7.10	Peak
6525.00	39.27	---	12.26	51.53	---	74.00	54.00	-2.47	Peak
966 Chamber_B at 3Meter / Vertical									
Frequency (MHz)	Reading-PK (dBuV)	Reading-AV (dBuV)	Correction Factor (dB/m)	Result-PK (dBuV/m)	Result-AV (dBuV/m)	Limit-PK (dBuV/m)	Limit-AV (dBuV/m)	Margin (dB)	Remark
1244.00	53.38	---	-2.89	50.49	---	74.00	54.00	-3.51	Peak
1400.00	52.66	---	-2.90	49.77	---	74.00	54.00	-4.23	Peak
1536.00	53.05	---	-2.56	50.49	---	74.00	54.00	-3.51	Peak
3225.00	45.43	---	4.26	49.70	---	74.00	54.00	-4.30	Peak
4845.00	38.18	---	8.12	46.30	---	74.00	54.00	-7.70	Peak
6660.00	38.66	---	12.23	50.89	---	74.00	54.00	-3.11	Peak

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Average test would be performed if the peak result were greater than the average limit.
3. Data of measurement within this frequency range shown " --- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
4. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
5. Result = Reading + Correction Factor
Margin = Result - Limit
Remark Peak = Result(PK) - Limit(AV)
Remark AVG = Result(AV) - Limit(AV)



Product Name	VoIP Wireless-N VPN Broadband Router	Test By	Rex Chiu
Test Model	BiPAC 6300VNP , BEC VG2600	Test Date	2014/06/12
Test Mode	IEEE 802.11gn HT40 TX / CH Middle	Temp. & Humidity	27°C, 58%

966 Chamber_B at 3Meter / Horizontal									
Frequency (MHz)	Reading-PK (dBuV)	Reading-AV (dBuV)	Correction Factor (dB/m)	Result-PK (dBuV/m)	Result-AV (dBuV/m)	Limit-PK (dBuV/m)	Limit-AV (dBuV/m)	Margin (dB)	Remark
1286.00	52.89	---	-2.89	50.00	---	74.00	54.00	-4.00	Peak
1404.00	52.92	---	-2.90	50.03	---	74.00	54.00	-3.97	Peak
1536.00	53.33	---	-2.56	50.77	---	74.00	54.00	-3.23	Peak
3195.00	42.13	---	4.24	46.37	---	74.00	54.00	-7.63	Peak
4875.00	38.81	---	8.18	47.00	---	74.00	54.00	-7.00	Peak
6825.00	39.39	---	12.18	51.57	---	74.00	54.00	-2.43	Peak
966 Chamber_B at 3Meter / Vertical									
Frequency (MHz)	Reading-PK (dBuV)	Reading-AV (dBuV)	Correction Factor (dB/m)	Result-PK (dBuV/m)	Result-AV (dBuV/m)	Limit-PK (dBuV/m)	Limit-AV (dBuV/m)	Margin (dB)	Remark
1508.00	53.10	---	-2.82	50.28	---	74.00	54.00	-3.72	Peak
2390.00	62.58	49.90	2.59	65.17	52.49	74.00	54.00	-1.51	AVG
2484.00	65.19	50.25	2.78	67.97	53.03	74.00	54.00	-0.97	AVG
3255.00	43.88	---	4.29	48.17	---	74.00	54.00	-5.83	Peak
4875.00	39.60	---	8.18	47.78	---	74.00	54.00	-6.22	Peak
6600.00	39.50	---	12.24	51.74	---	74.00	54.00	-2.26	Peak

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Average test would be performed if the peak result were greater than the average limit.
3. Data of measurement within this frequency range shown " --- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
4. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
5. Result = Reading + Correction Factor
Margin = Result - Limit
Remark Peak = Result(PK) - Limit(AV)
Remark AVG = Result(AV) - Limit(AV)



Product Name	VoIP Wireless-N VPN Broadband Router	Test By	Rex Chiu
Test Model	BiPAC 6300VNP , BEC VG2600	Test Date	2014/06/12
Test Mode	IEEE 802.11gn HT40 TX / CH High	Temp. & Humidity	27°C, 58%

966 Chamber_B at 3Meter / Horizontal									
Frequency (MHz)	Reading-PK (dBuV)	Reading-AV (dBuV)	Correction Factor (dB/m)	Result-PK (dBuV/m)	Result-AV (dBuV/m)	Limit-PK (dBuV/m)	Limit-AV (dBuV/m)	Margin (dB)	Remark
1240.00	53.00	---	-2.89	50.11	---	74.00	54.00	-3.89	Peak
1376.00	53.36	---	-2.90	50.46	---	74.00	54.00	-3.54	Peak
1504.00	53.33	---	-2.86	50.47	---	74.00	54.00	-3.53	Peak
3060.00	42.65	---	4.13	46.78	---	74.00	54.00	-7.22	Peak
4920.00	40.56	---	8.28	48.84	---	74.00	54.00	-5.16	Peak
6585.00	39.17	---	12.25	51.42	---	74.00	54.00	-2.58	Peak
966 Chamber_B at 3Meter / Vertical									
Frequency (MHz)	Reading-PK (dBuV)	Reading-AV (dBuV)	Correction Factor (dB/m)	Result-PK (dBuV/m)	Result-AV (dBuV/m)	Limit-PK (dBuV/m)	Limit-AV (dBuV/m)	Margin (dB)	Remark
1298.00	53.72	---	-2.89	50.82	---	74.00	54.00	-3.18	Peak
1498.00	53.38	---	-2.90	50.48	---	74.00	54.00	-3.52	Peak
2350.00	58.17	47.28	2.51	60.68	49.79	74.00	54.00	-4.21	AVG
4155.00	40.97	---	6.34	47.31	---	74.00	54.00	-6.69	Peak
4920.00	39.07	---	8.28	47.35	---	74.00	54.00	-6.65	Peak
6150.00	38.59	---	11.24	49.83	---	74.00	54.00	-4.17	Peak

Remark:


1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Average test would be performed if the peak result were greater than the average limit.
3. Data of measurement within this frequency range shown " --- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
4. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
5. Result = Reading + Correction Factor
Margin = Result - Limit
Remark Peak = Result(PK) - Limit(AV)
Remark AVG = Result(AV) - Limit(AV)



Restricted Band Edges


Detector Mode : Peak

Polarity : Horizontal

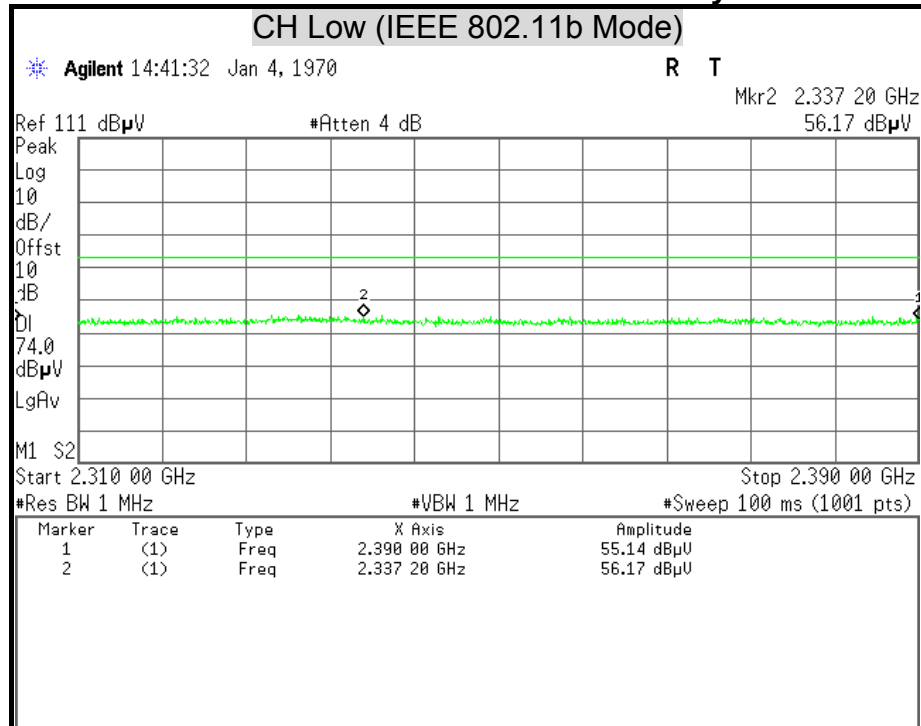

Detector Mode : Average


Polarity : Horizontal

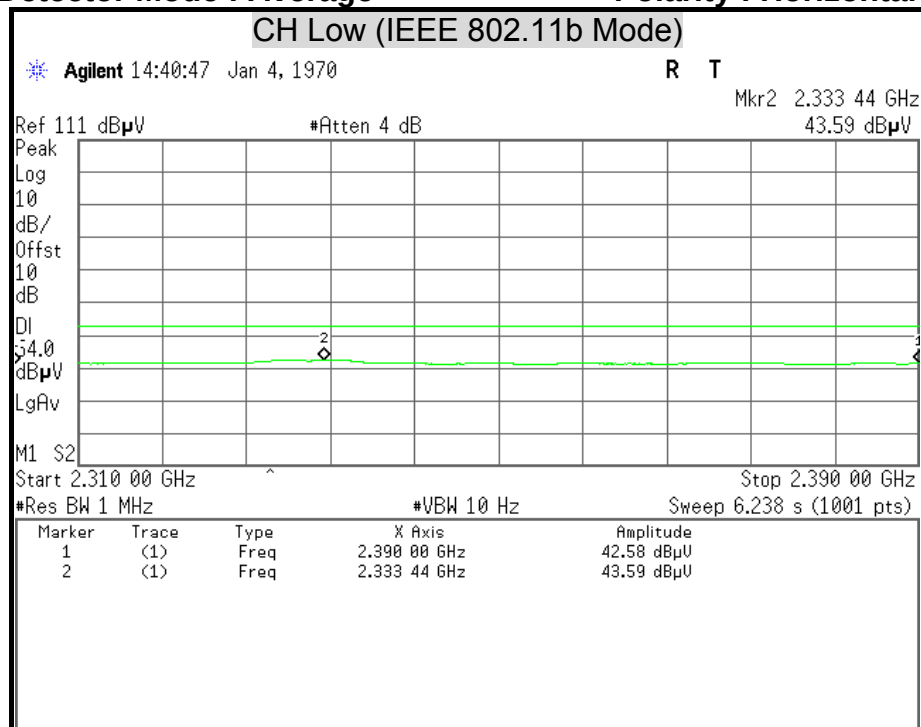




Detector Mode : Peak

Polarity : Vertical

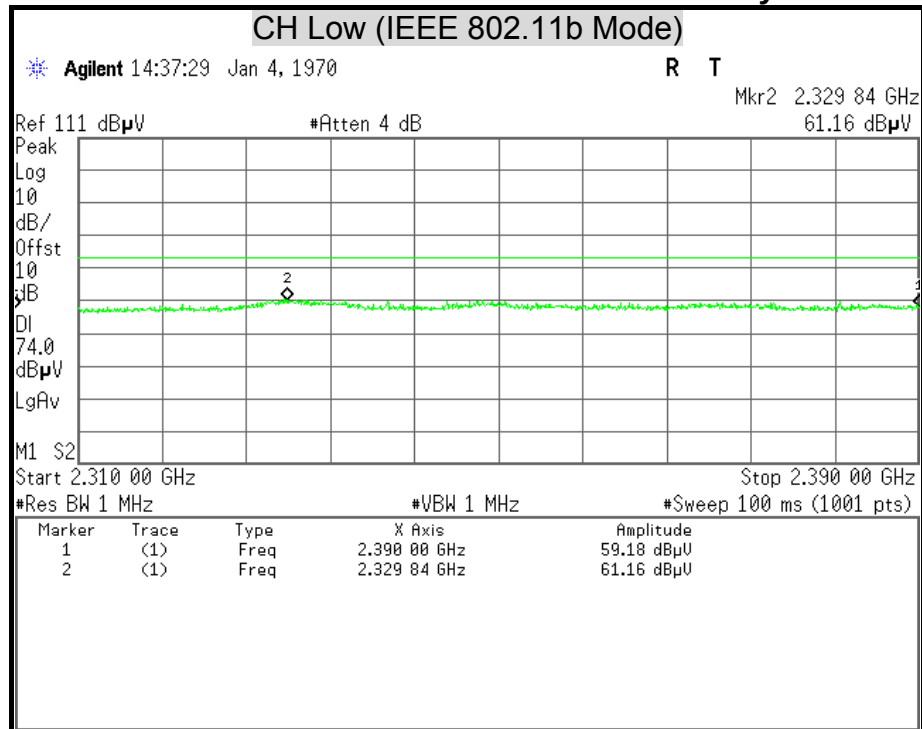

Detector Mode : Average


Polarity : Vertical

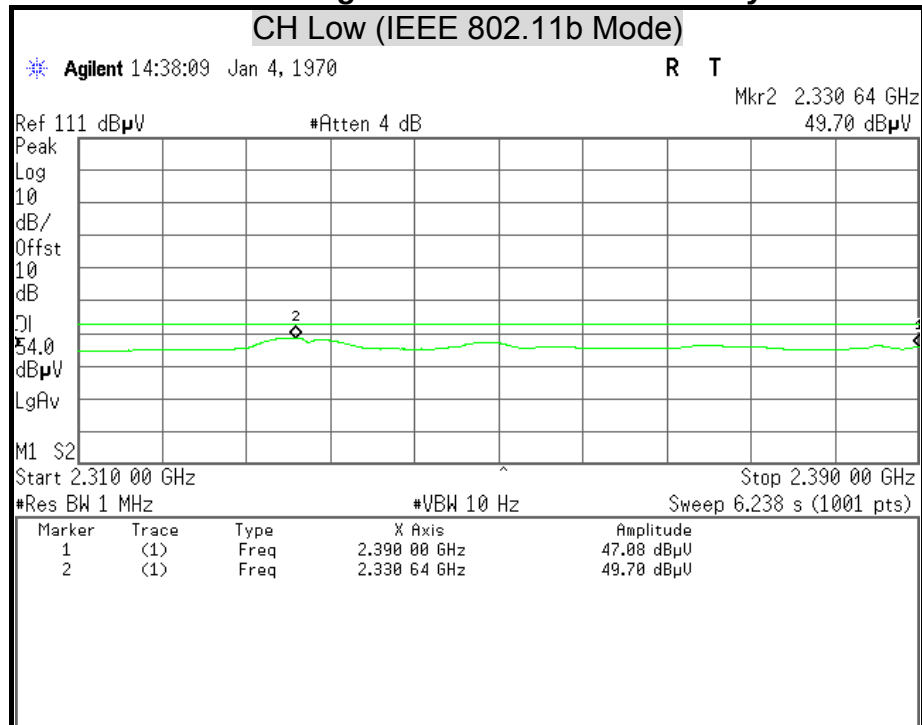




Detector Mode : Peak

Polarity : Horizontal

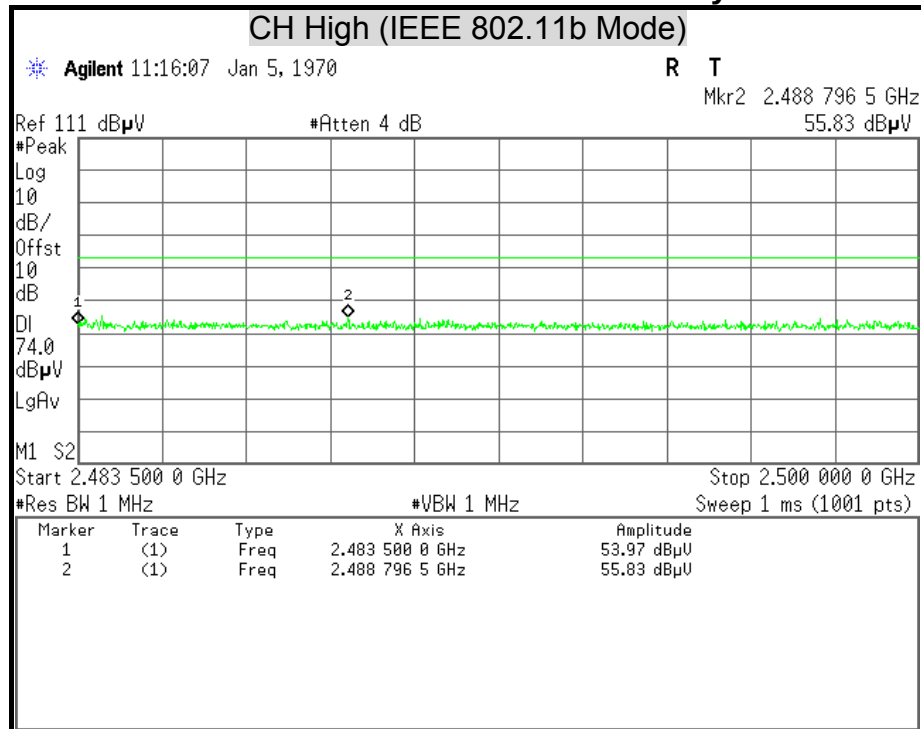

Detector Mode : Average


Polarity : Horizontal

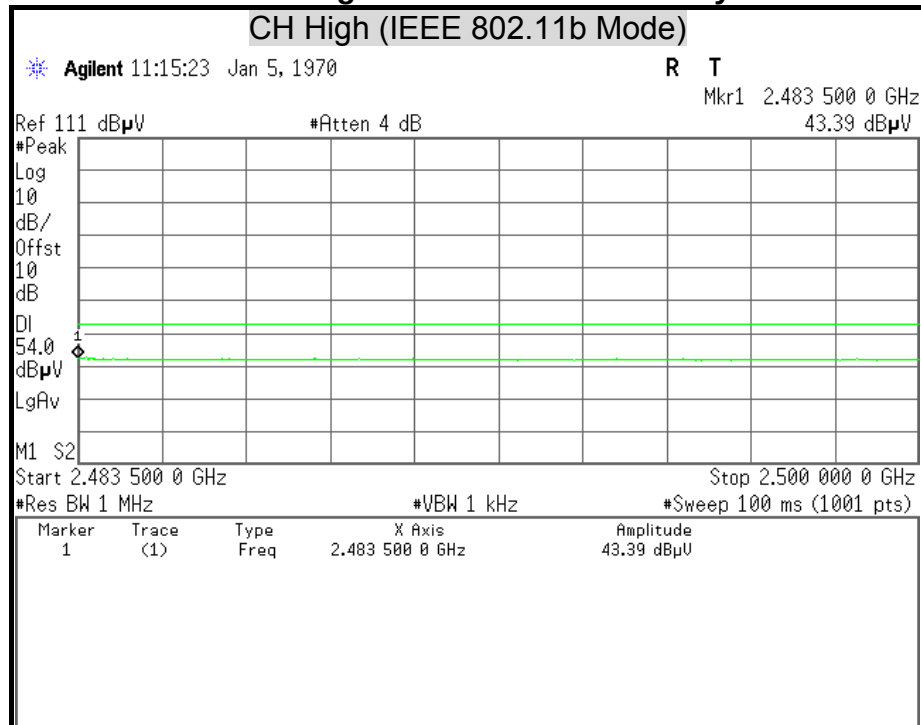




Detector Mode : Peak

Polarity : Vertical

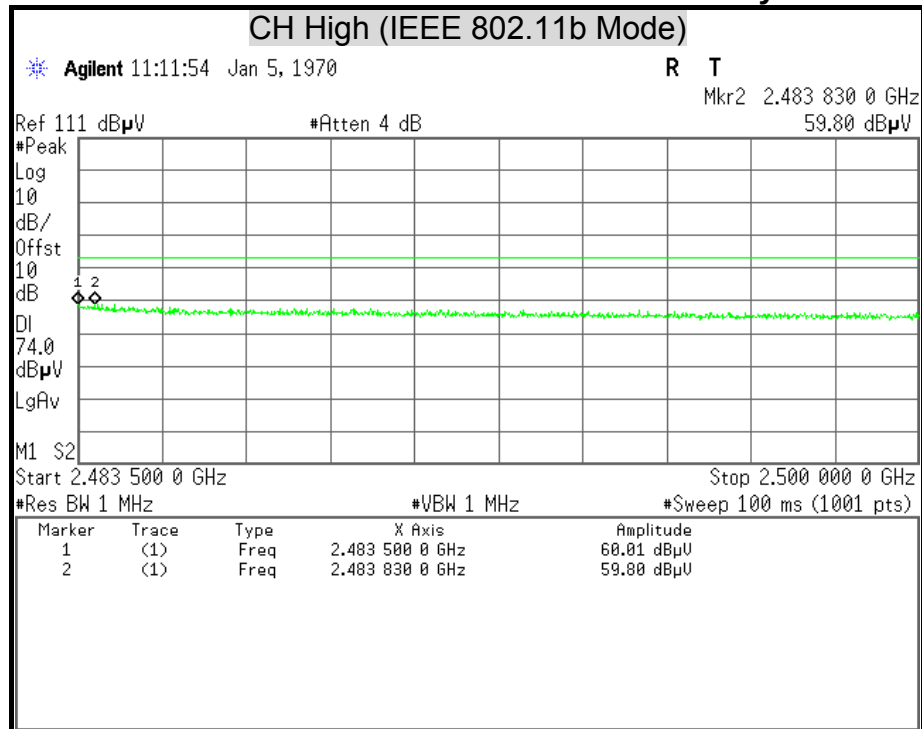

Detector Mode : Average


Polarity : Vertical

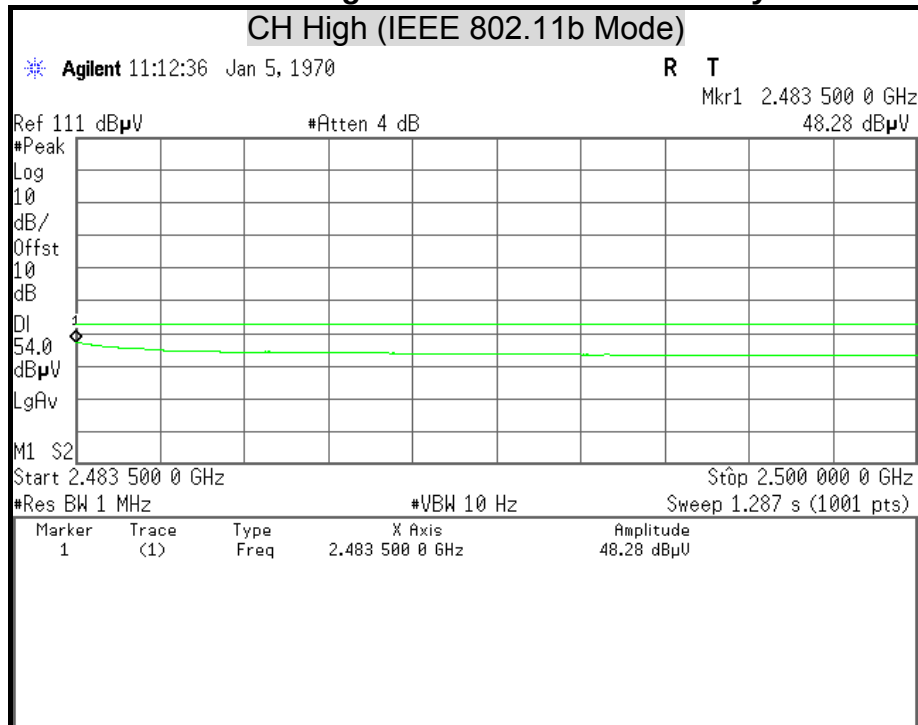




Detector Mode : Peak

Polarity : Horizontal

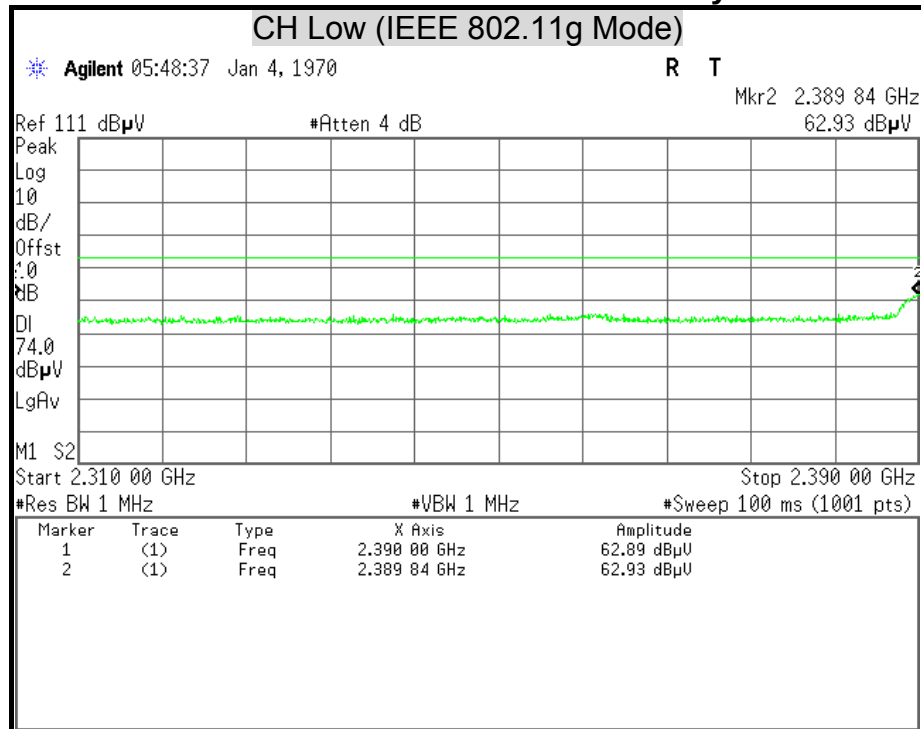

Detector Mode : Average


Polarity : Horizontal

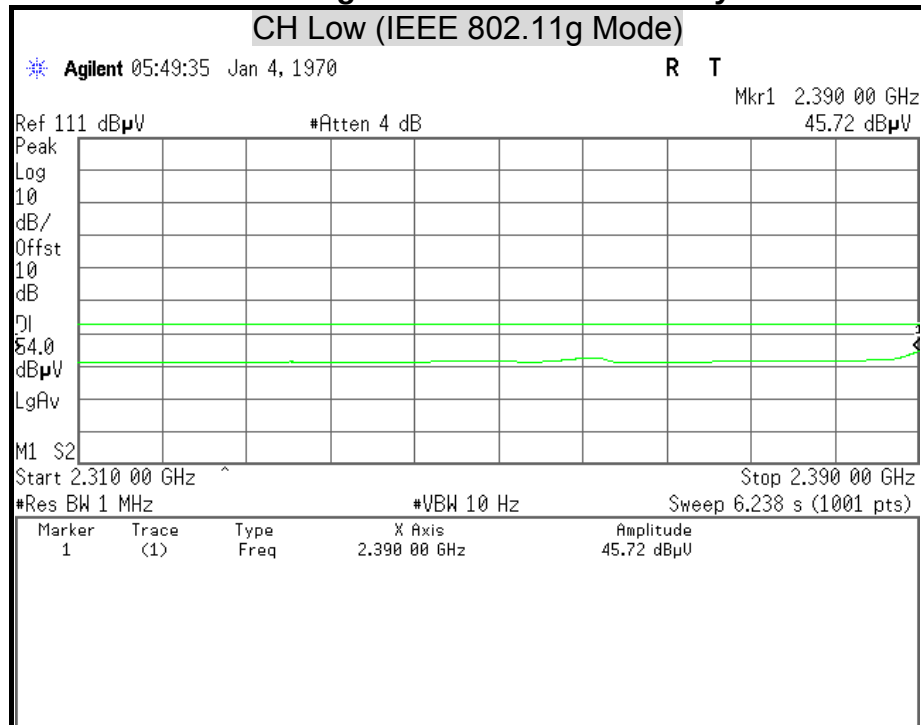




Detector Mode : Peak

Polarity : Vertical

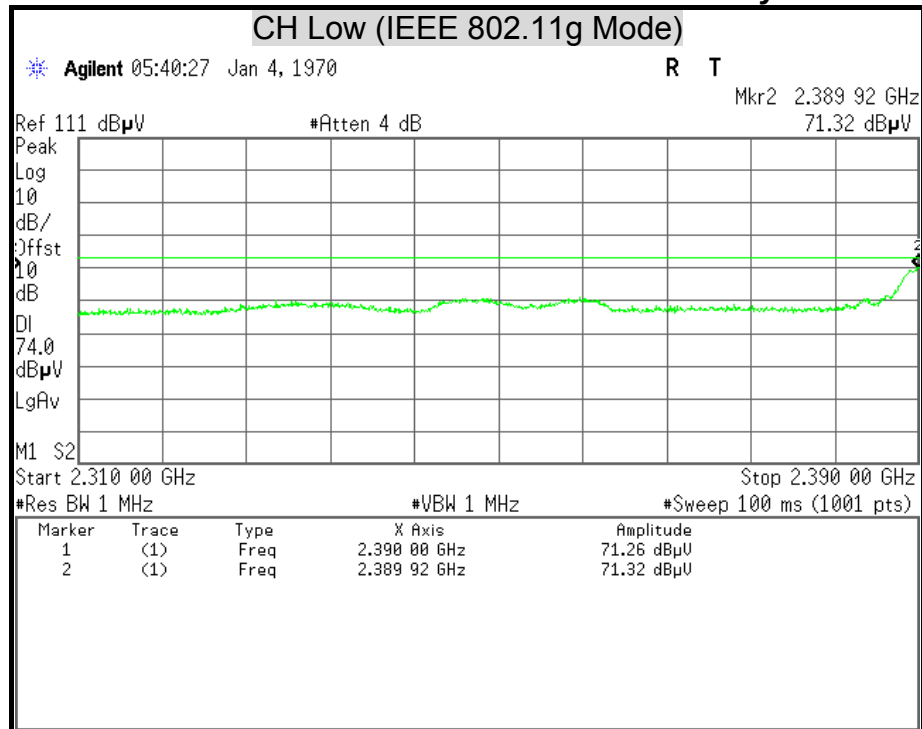

Detector Mode : Average


Polarity : Vertical

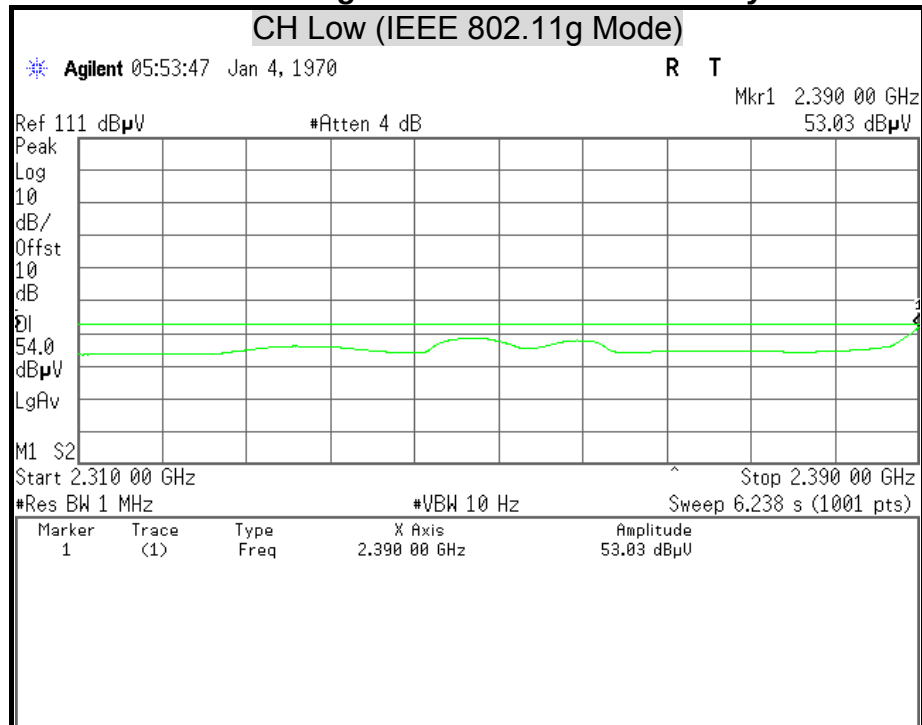




Detector Mode : Peak

Polarity : Horizontal

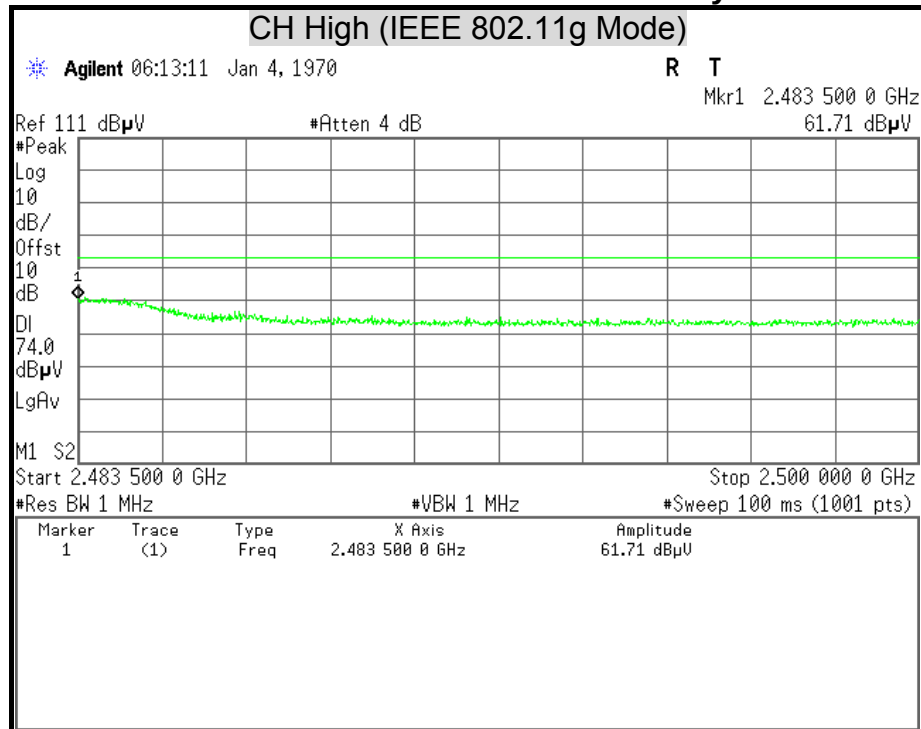

Detector Mode : Average


Polarity : Horizontal

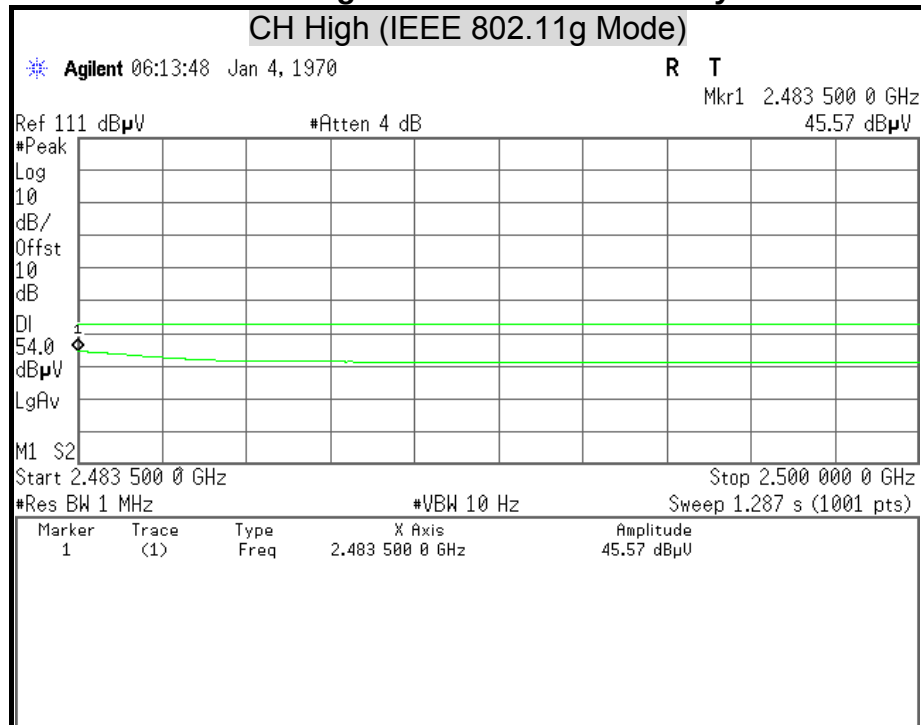




Detector Mode : Peak

Polarity : Vertical

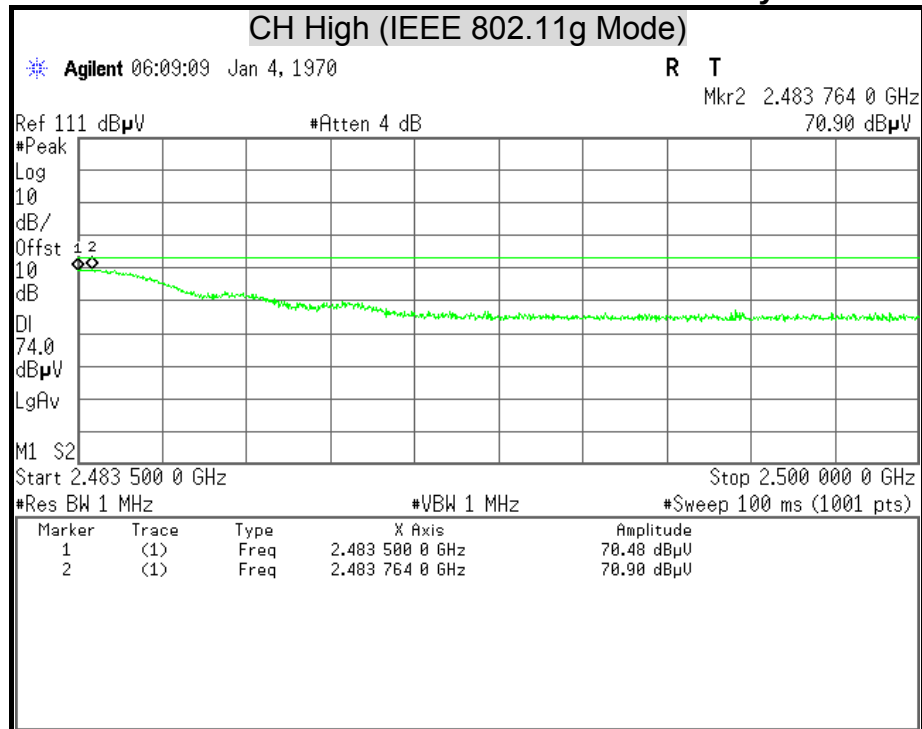

Detector Mode : Average


Polarity : Vertical

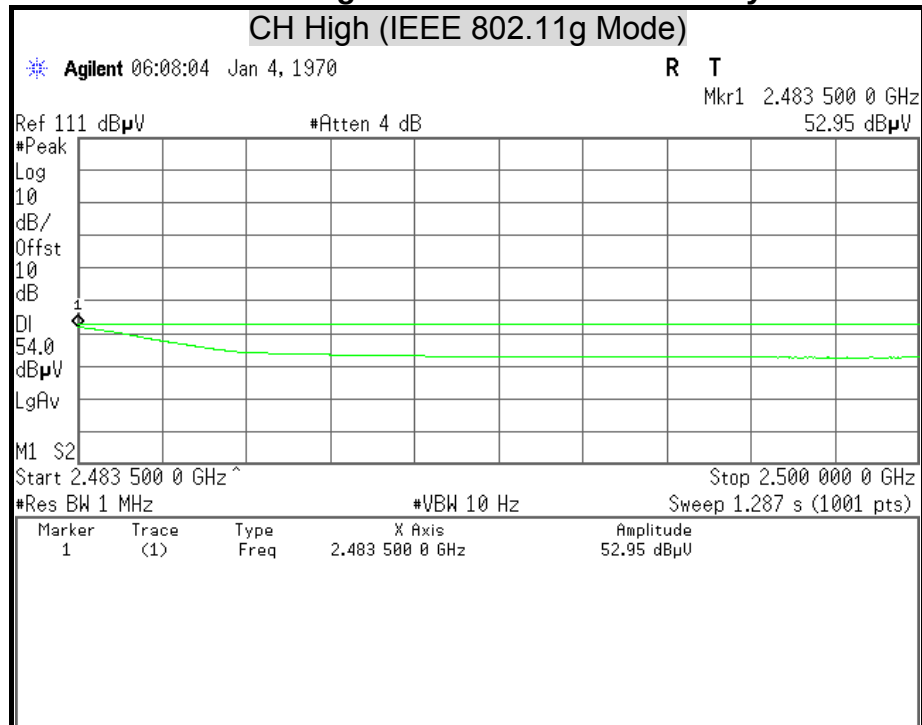




Detector Mode : Peak

Polarity : Horizontal

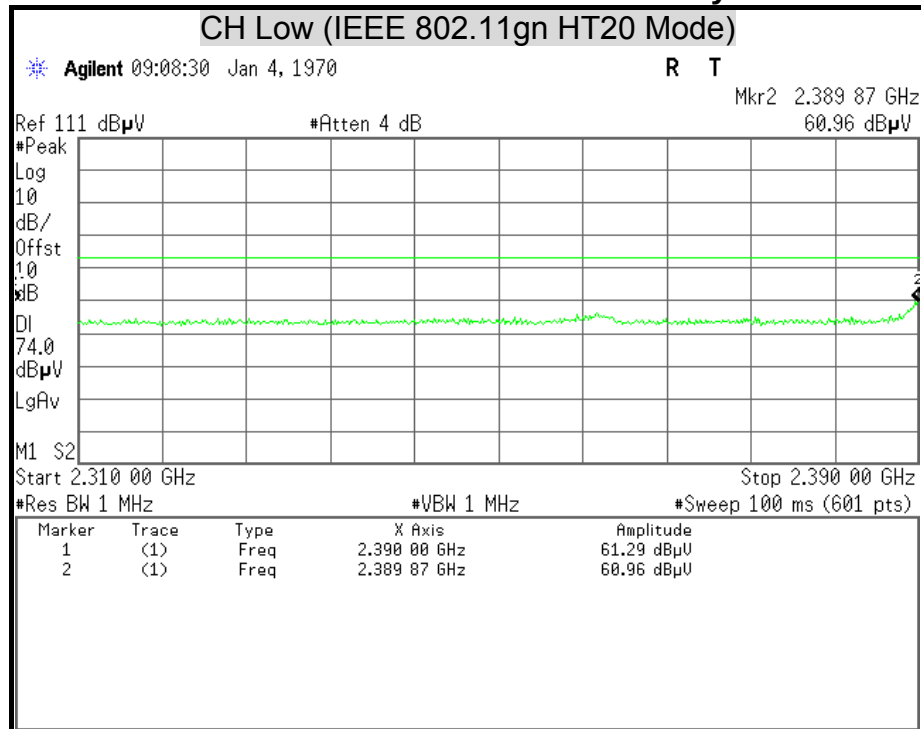

Detector Mode : Average


Polarity : Horizontal

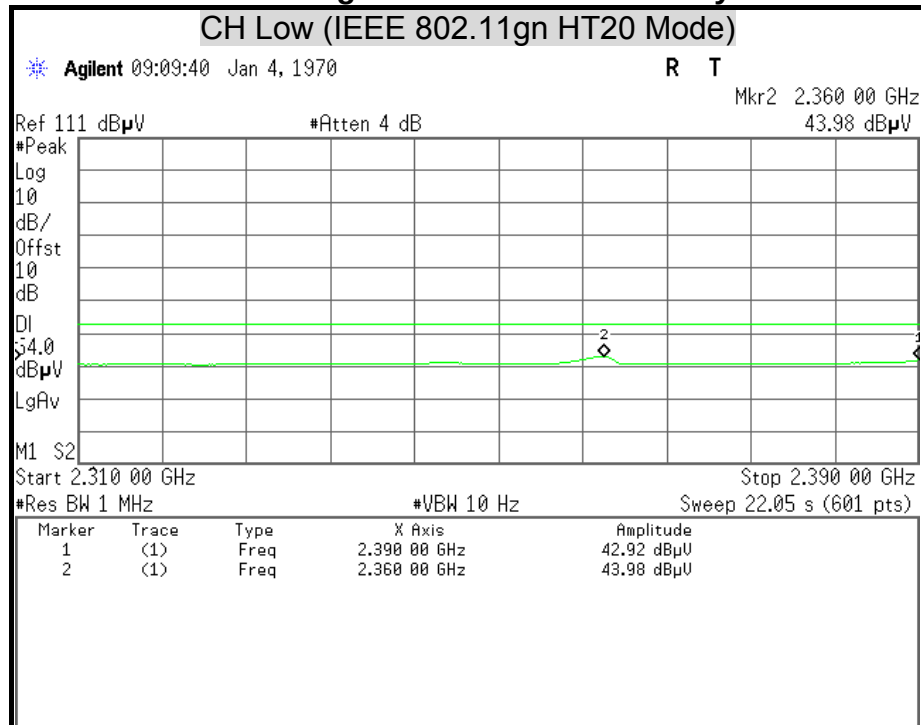




Detector Mode : Peak

Polarity : Vertical

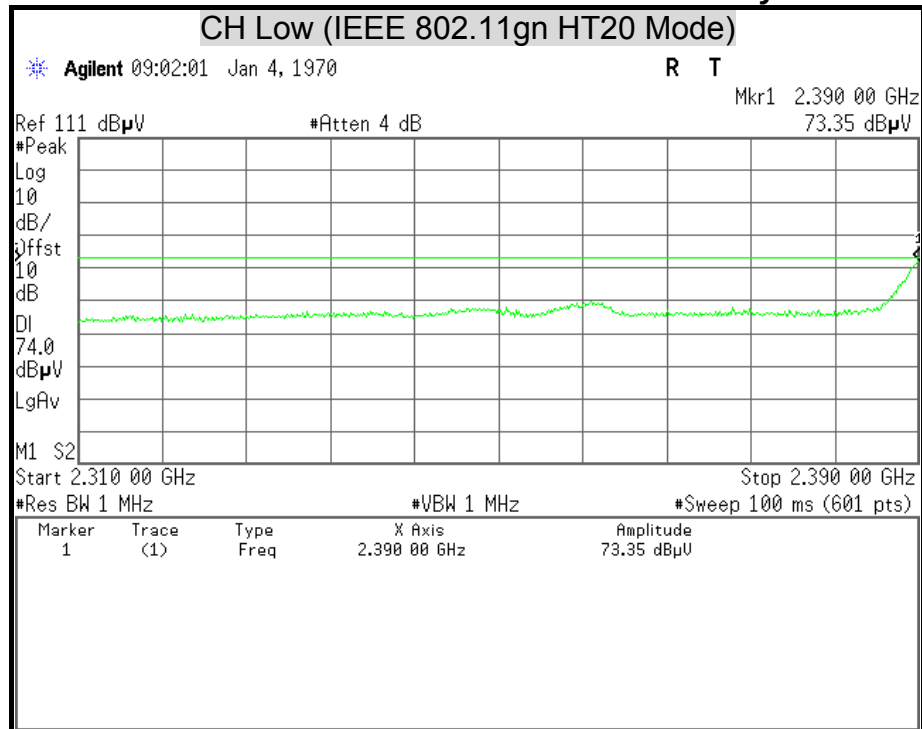

Detector Mode : Average


Polarity : Vertical

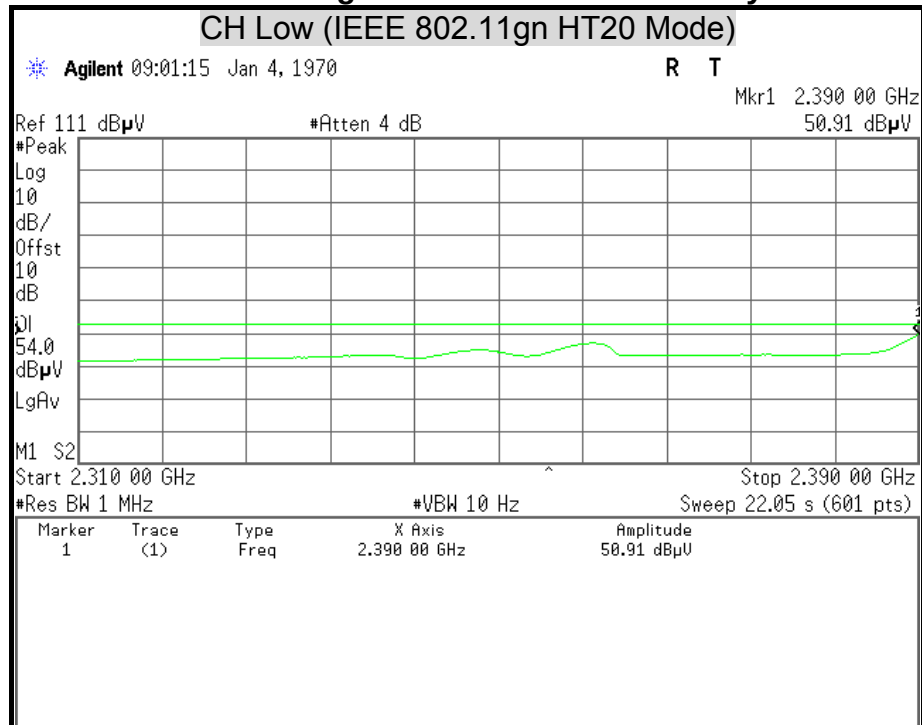




Detector Mode : Peak

Polarity : Horizontal

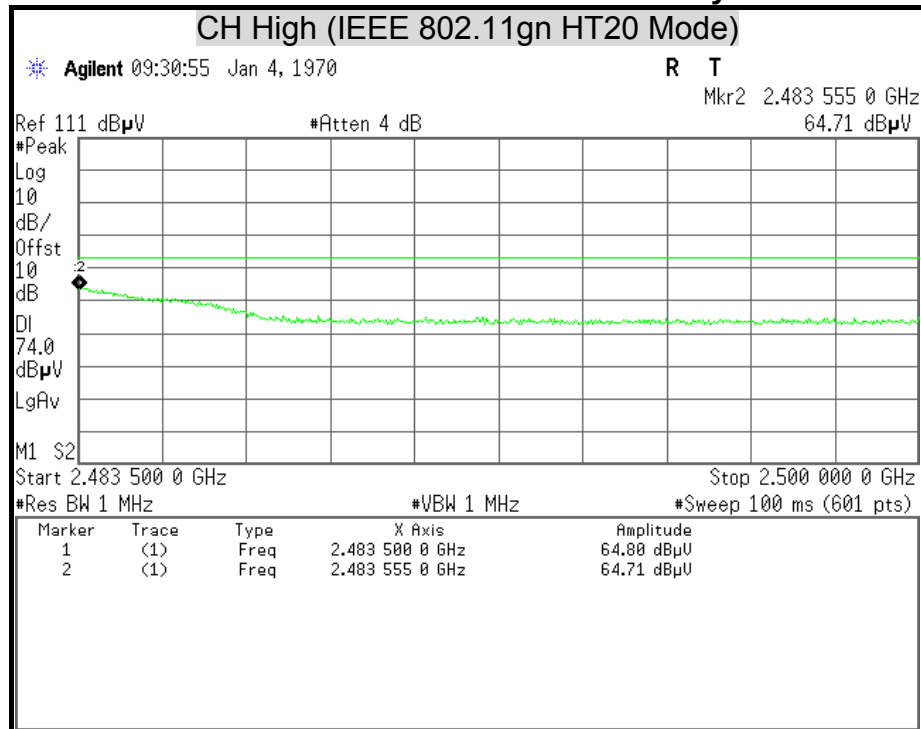

Detector Mode : Average


Polarity : Horizontal

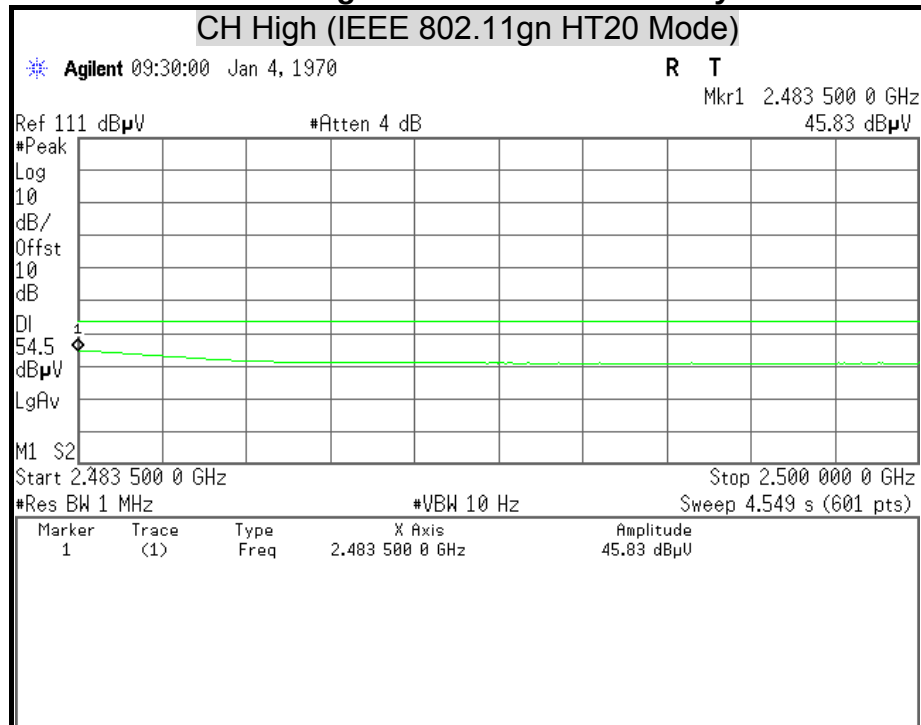




Detector Mode : Peak

Polarity : Vertical

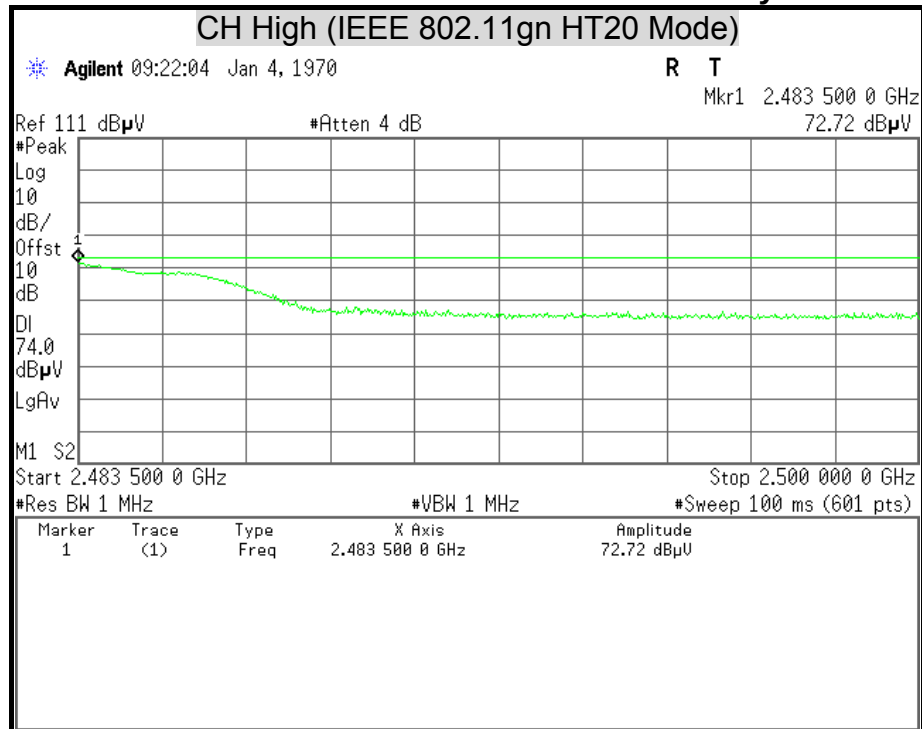

Detector Mode : Average


Polarity : Vertical

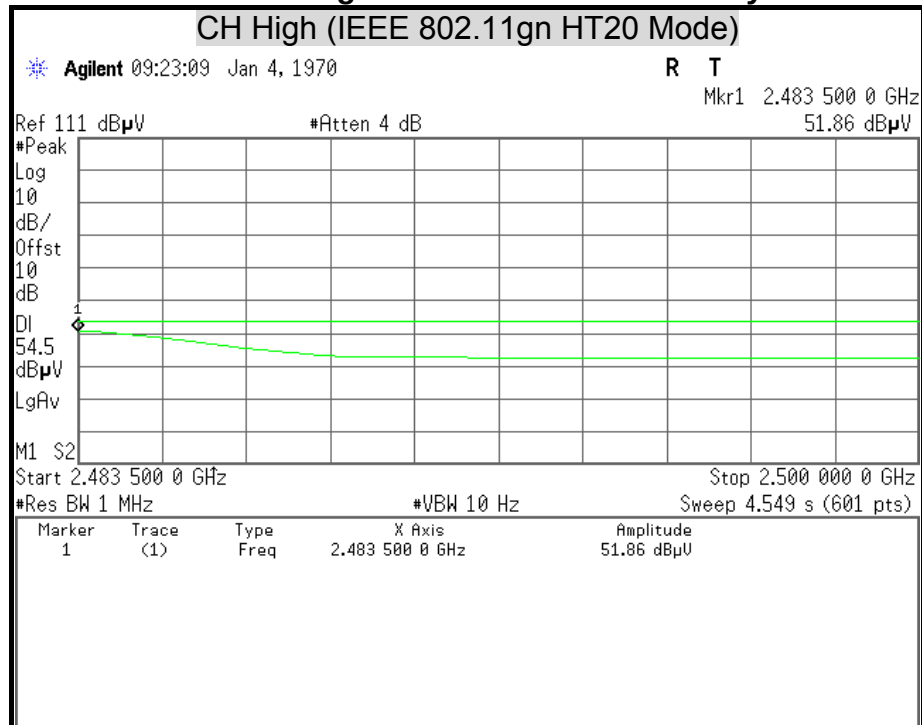




Detector Mode : Peak

Polarity : Horizontal

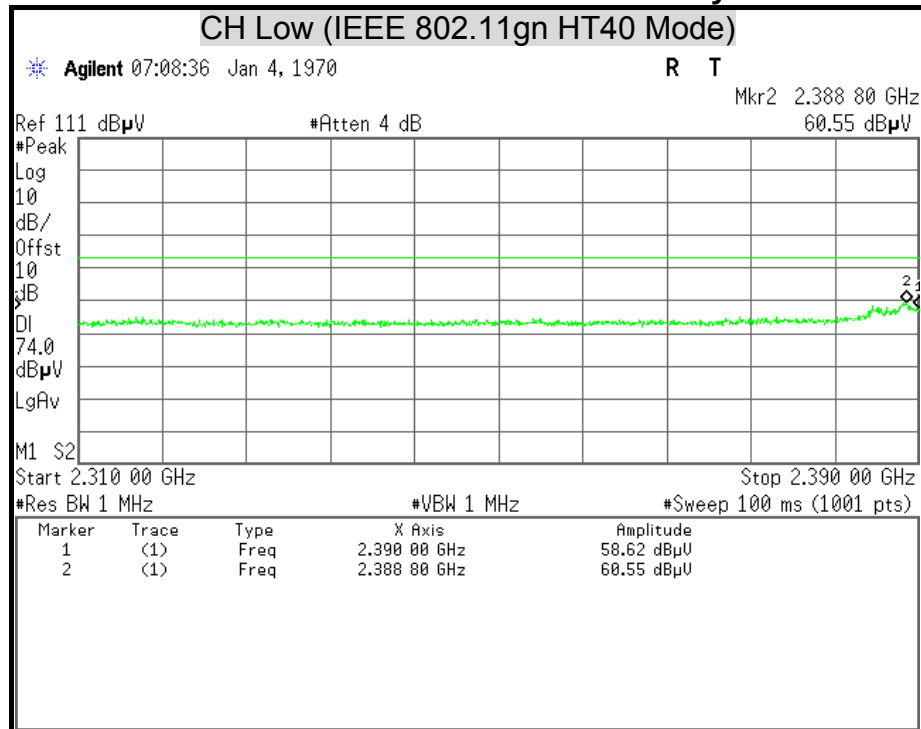

Detector Mode : Average


Polarity : Horizontal

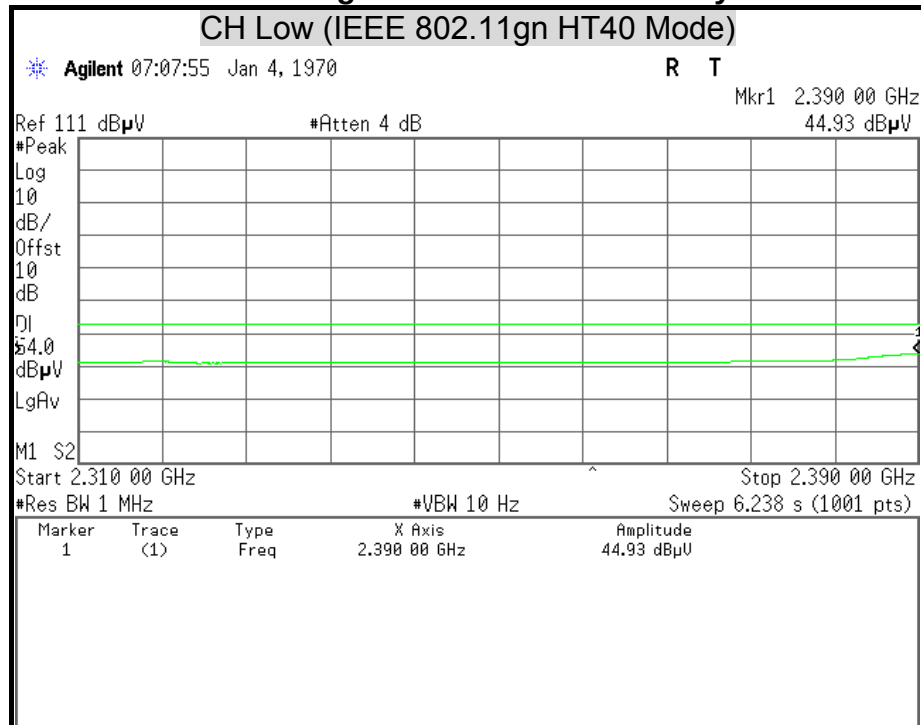




Detector Mode : Peak

Polarity : Vertical

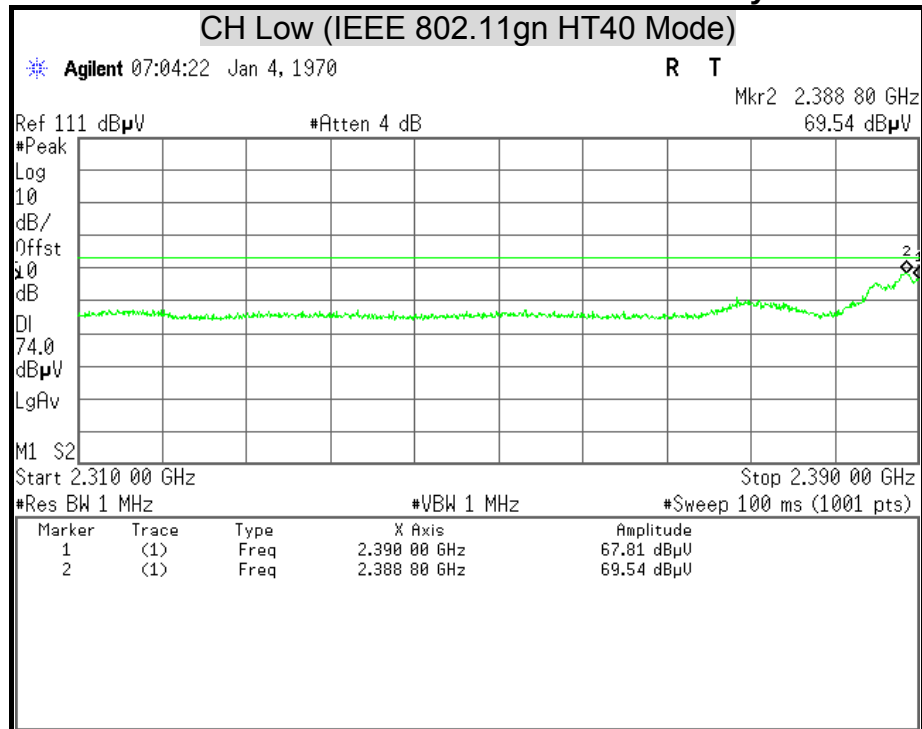

Detector Mode : Average


Polarity : Vertical

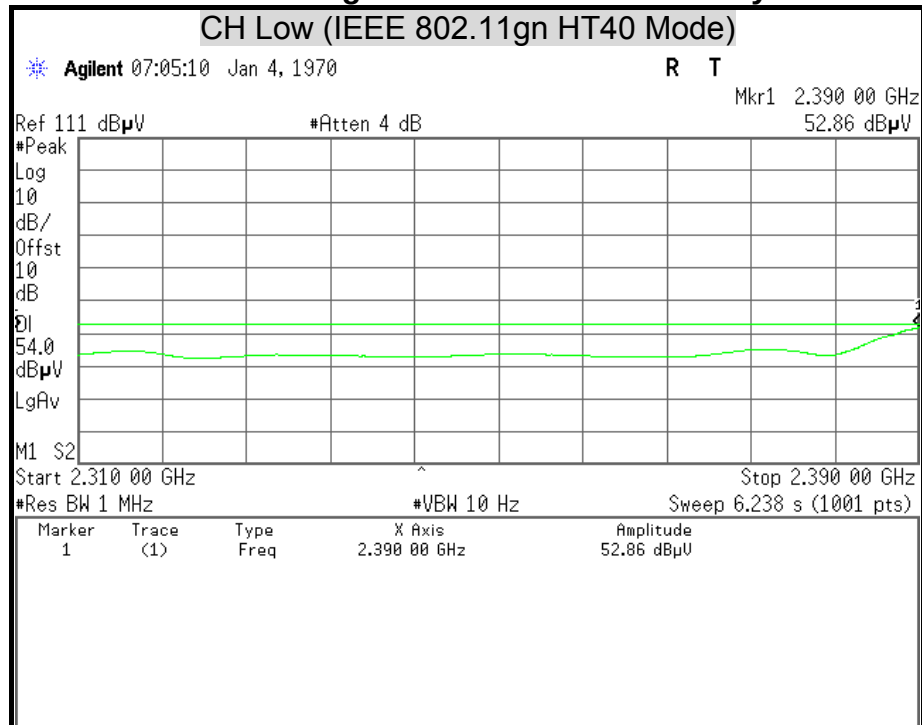




Detector Mode : Peak

Polarity : Horizontal

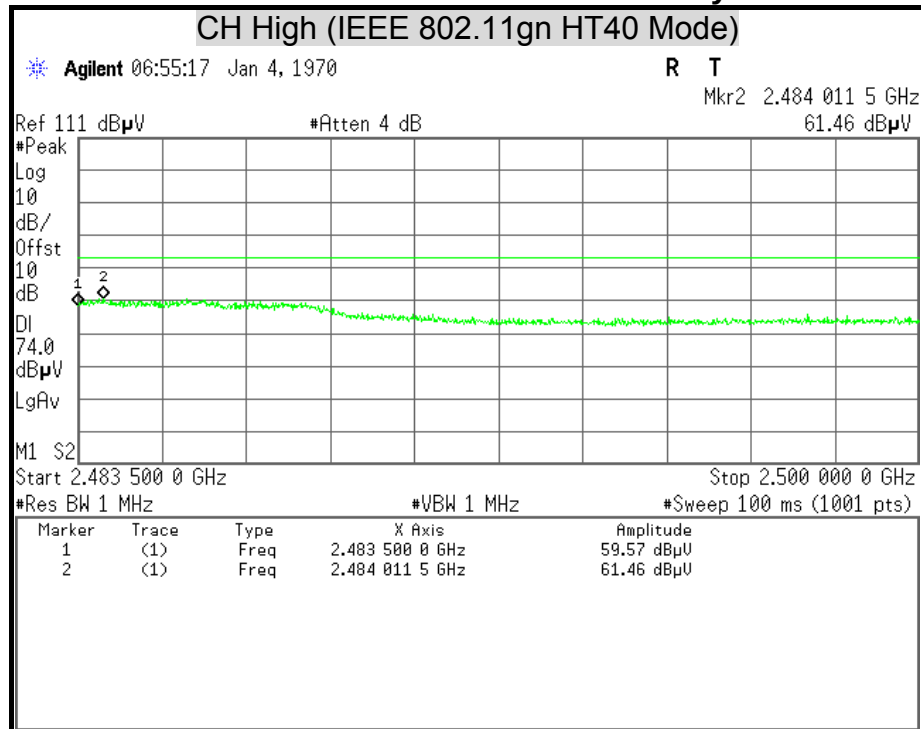

Detector Mode : Average


Polarity : Horizontal

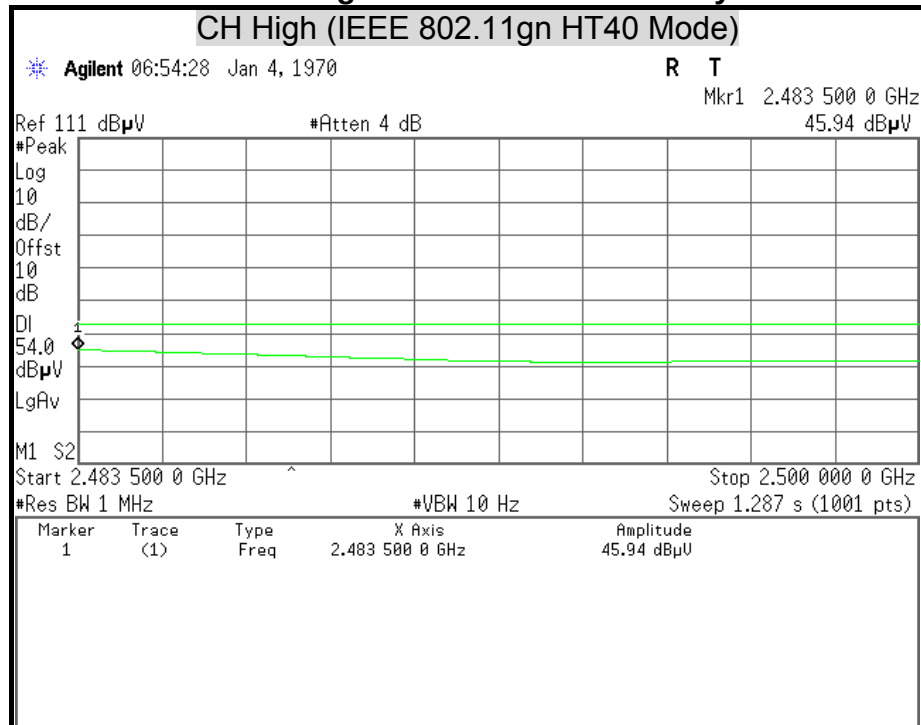




Detector Mode : Peak

Polarity : Vertical

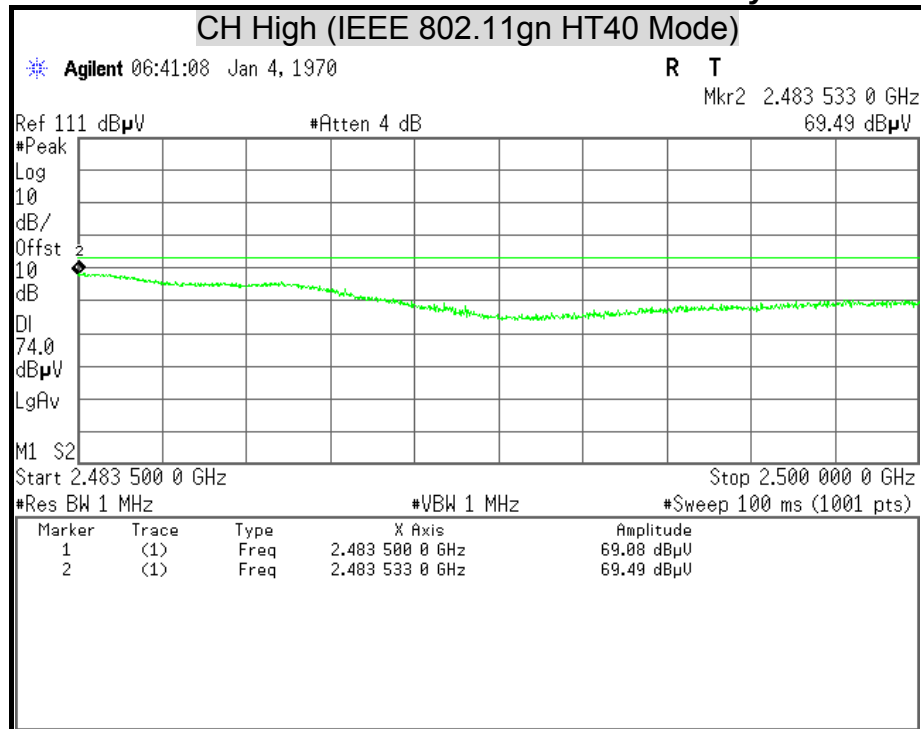

Detector Mode : Average

Polarity : Vertical

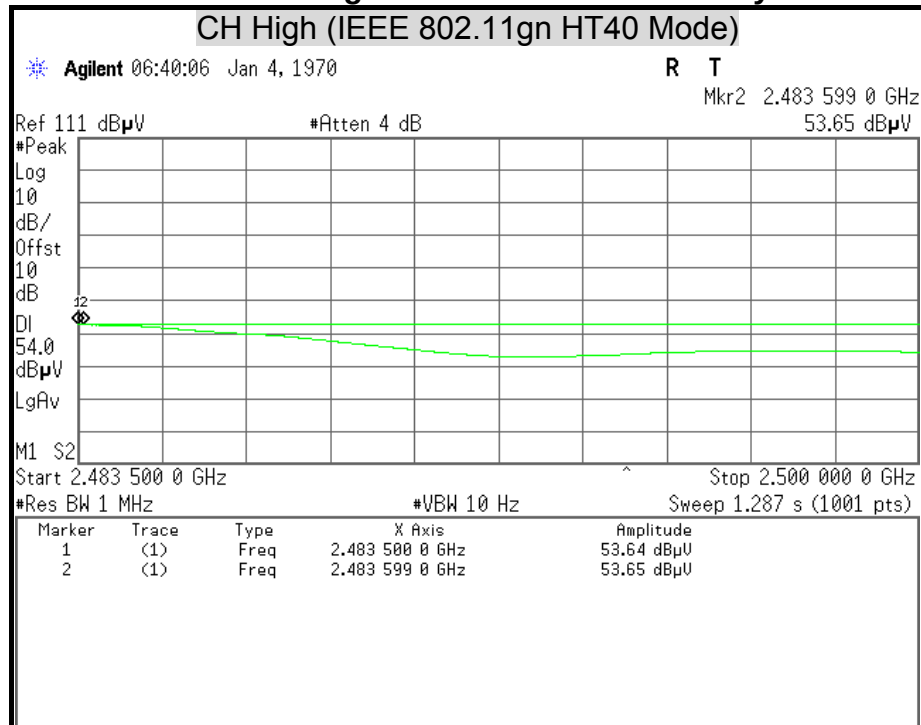



7.7 CONDUCTED EMISSION

LIMITS

§ 15.207 (a) Except as shown in paragraph (b) and (c) this section, for an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table, as measured using a 50 μ H/50 ohms line impedance stabilization network (LISN). Compliance with the provisions of this paragraph shall be based on the measurement of the radio frequency voltage between each power line and ground at the power terminal. The lower limit applies at the boundary between the frequency ranges.

Frequency Range (MHz)	Conducted Limit (dB μ v)	
	Quasi-peak	Average
0.15 - 0.50	66 - 56*	56 - 46*
0.50 - 5.00	56	46
5.00 - 30.0	60	50

Remark: * Decreasing linearly with the logarithm of the frequency.


TEST EQUIPMENT

Name of Equipment	Manufacturer	Model	Serial Number	Calibration Due
L.I.S.N	SCHWARZBECK	NSLK 8127	8127-465	08/11/2014
L.I.S.N	SCHWARZBECK	NSLK 8127	8127-473	03/10/2015
EMI Test Receiver	ROHDE & SCHWARZ	ESHS 30	838550/003	11/07/2014
Pulse Limiter	ROHDE & SCHWARZ	ESH3-Z2	100117	07/01/2014

Remark: Each piece of equipment is scheduled for calibration once a year.



TEST SETUP

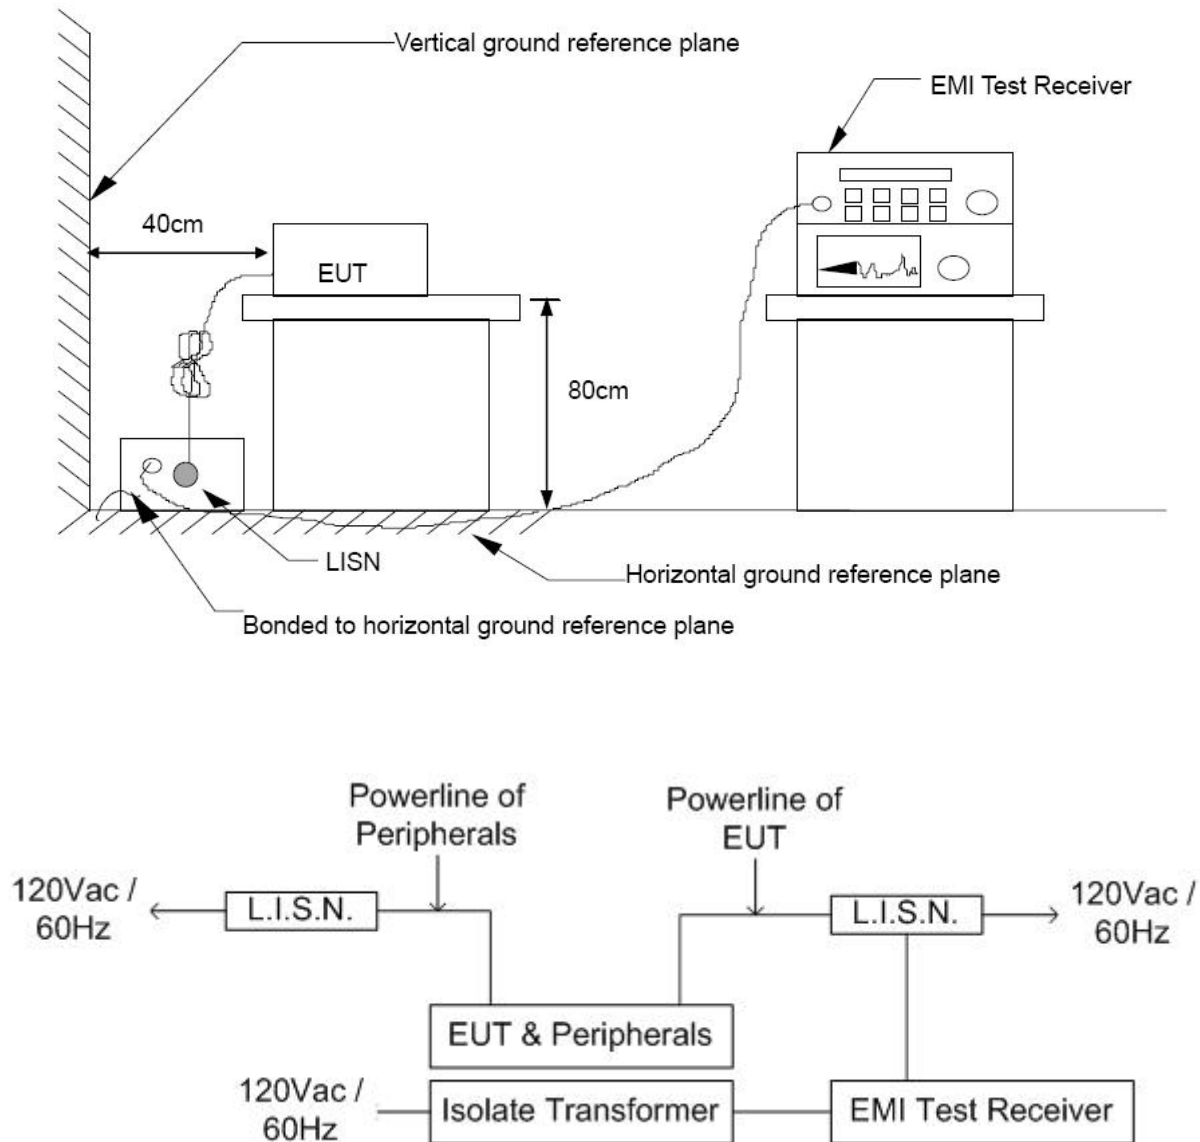



TEST PROCEDURE

The basic test procedure was in accordance with ANSI C63.10:2009.

The test procedure is performed in a 4m × 3m × 2.4m (L×W×H) shielded room.


The EUT along with its peripherals were placed on a 1.0m (W) × 1.5m (L) and 0.8m in height wooden table and the EUT was adjusted to maintain a 0.4 meter space from a vertical reference plane.

The EUT was connected to power mains through a line impedance stabilization network (LISN) which provides 50 ohm coupling impedance for measuring instrument and the chassis ground was bounded to the horizontal ground plane of shielded room. All peripherals were connected to the second LISN and the chassis ground also bounded to the horizontal ground plane of shielded room.

The EUT was located so that the distance between the boundary of the EUT and the closest surface of the LISN is 0.8 m. Where a mains flexible cord was provided by the manufacturer shall be 1 m long, or if in excess of 1 m, the excess cable was folded back and forth as far as possible so as to form a bundle not exceeding 0.4 m in length.

**TEST RESULTS**

Product Name	VoIP Wireless-N VPN Broadband Router	Test By	Rex Chiu
Test Model	BiPAC 6300VNP , BEC VG2600	Test Date	2014/06/03
Test Mode	Normal Operating / Power Adapter 1	Temp. & Humidity	21°C, 61%

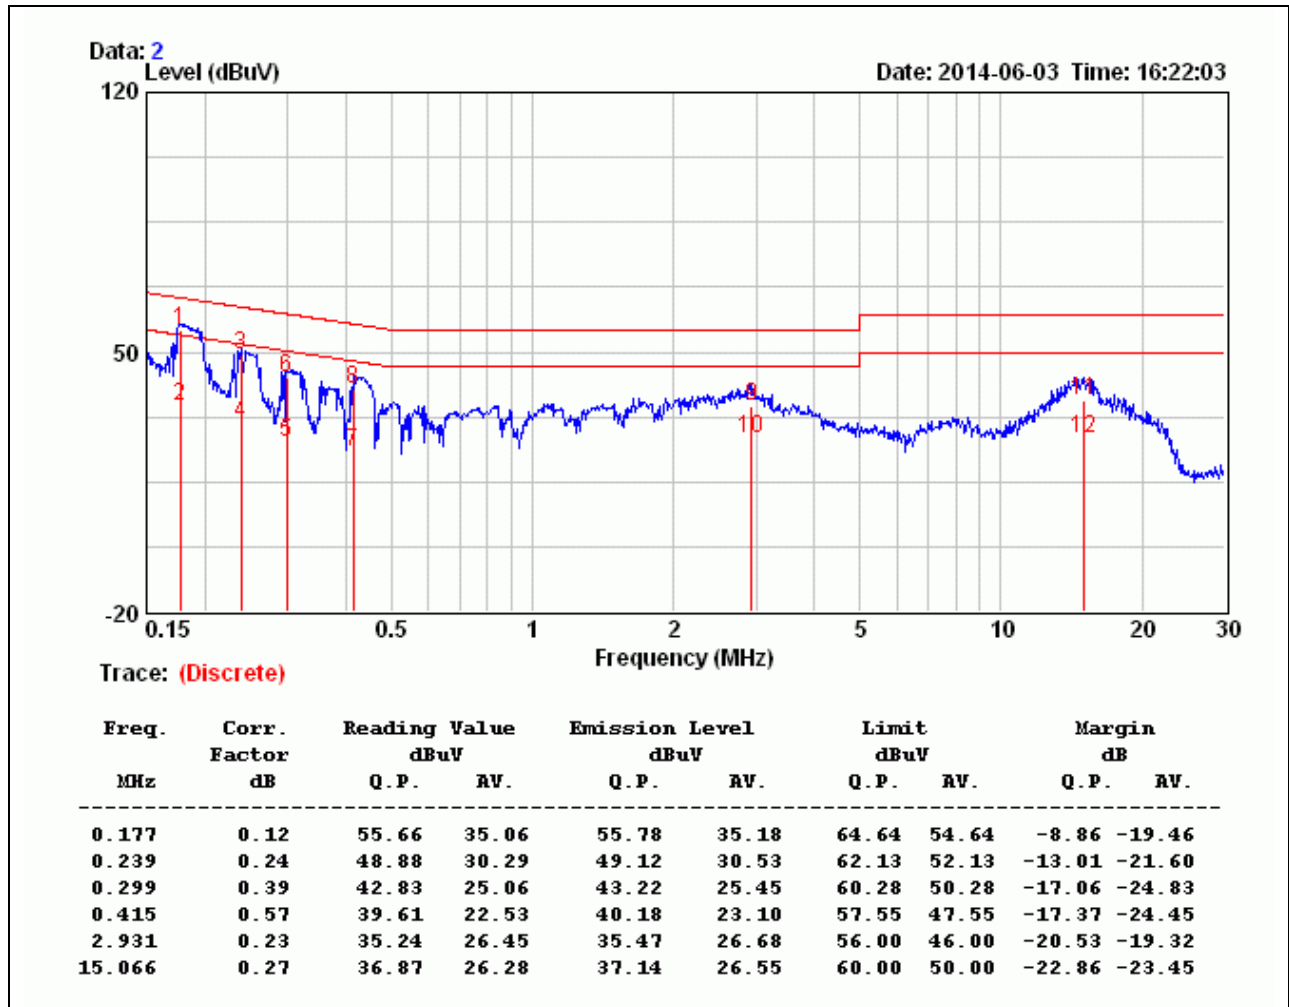
LINE**Remark:**

1. Correction Factor = Insertion loss + Cable loss
2. Emission level = Reading Value + Correction factor
3. Margin value = Emission level – Limit value



Product Name	VoIP Wireless-N VPN Broadband Router	Test By	Rex Chiu
Test Model	BiPAC 6300VNP , BEC VG2600	Test Date	2014/06/03
Test Mode	Normal Operating / Power Adapter 1	Temp. & Humidity	21°C, 61%

NEUTRAL

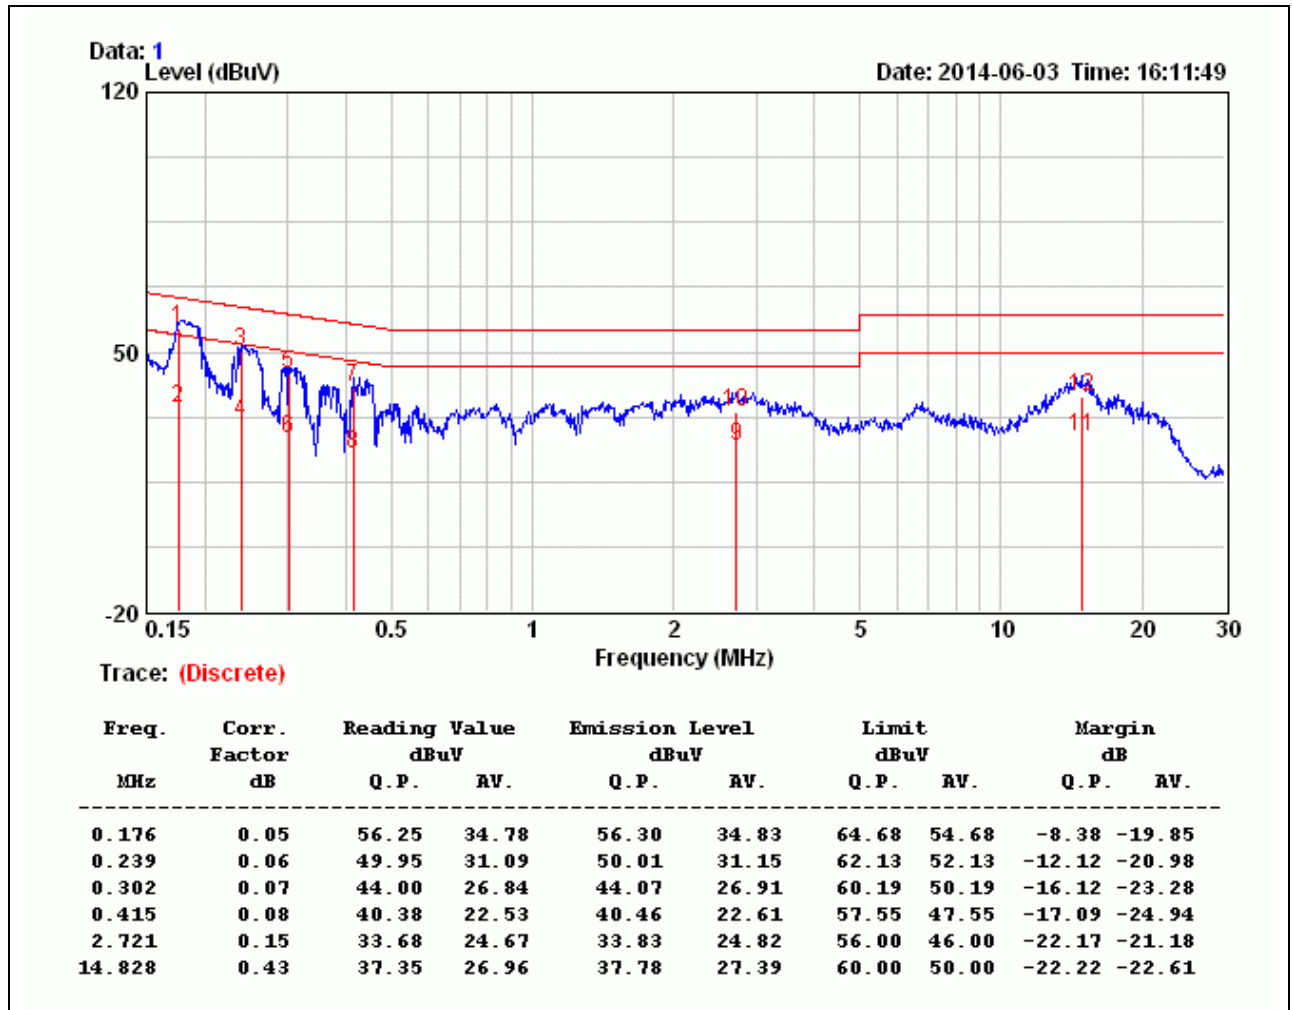


Remark:

1. Correction Factor = Insertion loss + Cable loss
2. Emission level = Reading Value + Correction factor
3. Margin value = Emission level – Limit value



Product Name	VoIP Wireless-N VPN Broadband Router	Test By	Rex Chiu
Test Model	BiPAC 6300VNP , BEC VG2600	Test Date	2014/06/14
Test Mode	Normal Operating / Power Adapter 2	Temp. & Humidity	21 °C, 61%

LINE

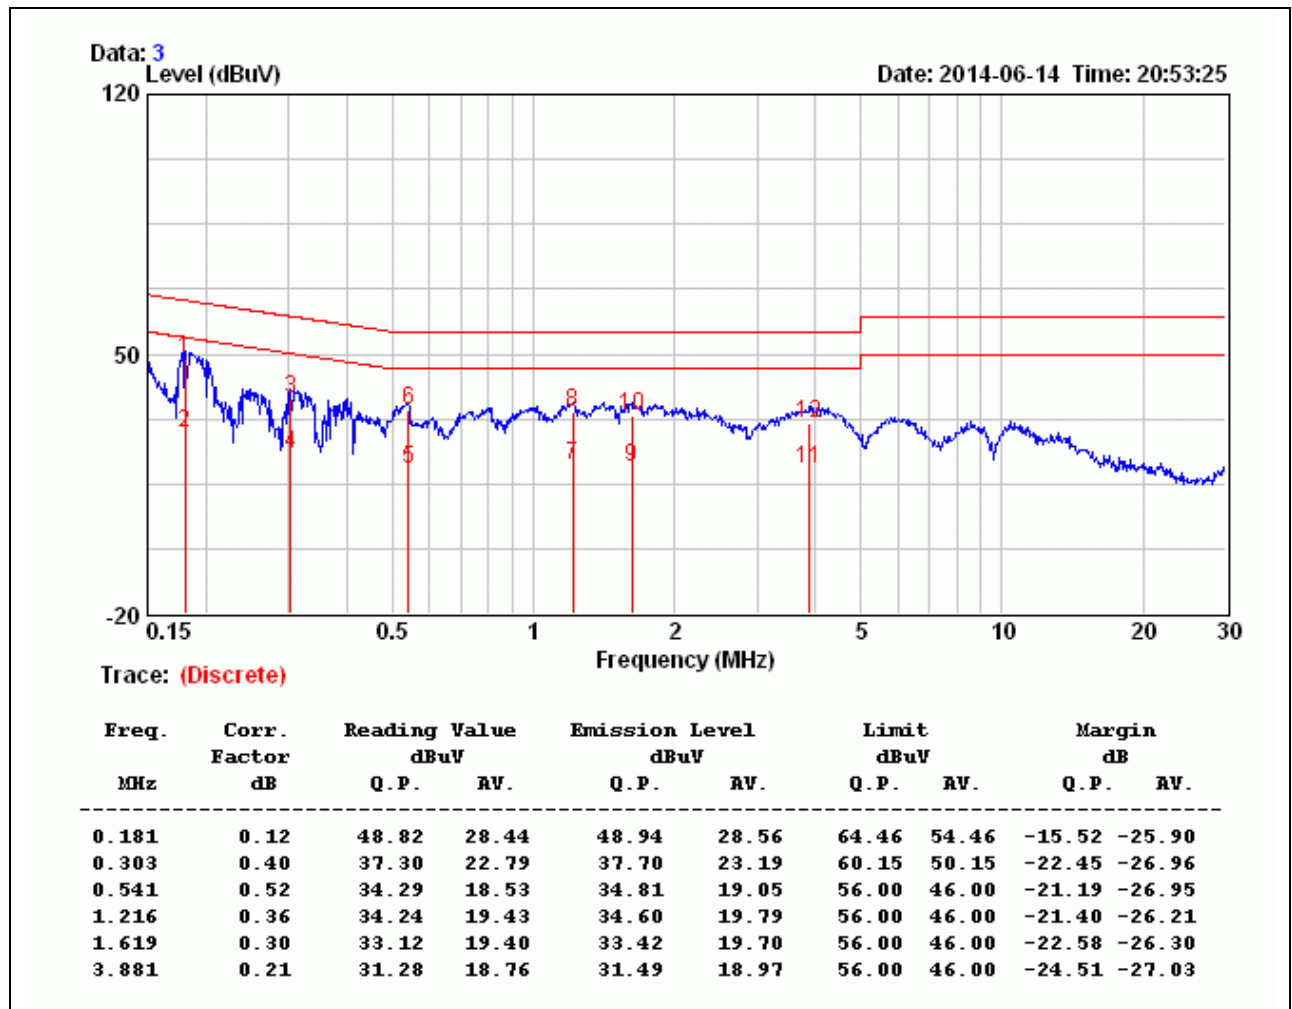


Remark:

1. Correction Factor = Insertion loss + Cable loss
2. Emission level = Reading Value + Correction factor
3. Margin value = Emission level – Limit value



Product Name	VoIP Wireless-N VPN Broadband Router	Test By	Rex Chiu
Test Model	BiPAC 6300VNP , BEC VG2600	Test Date	2014/06/14
Test Mode	Normal Operating / Power Adapter 2	Temp. & Humidity	21 °C, 61%

NEUTRAL

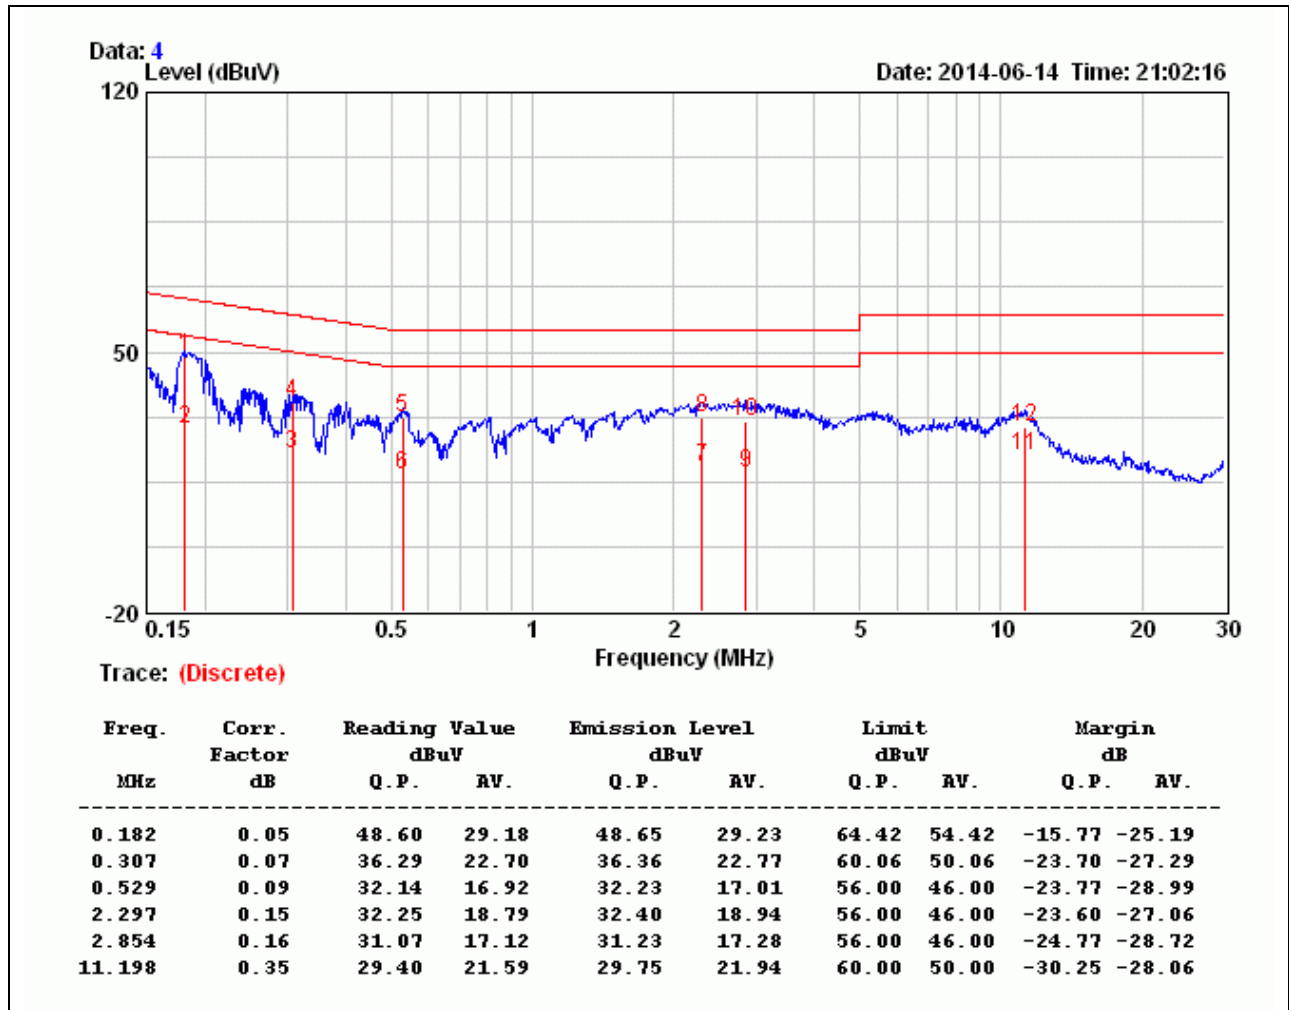

Remark:

1. Correction Factor = Insertion loss + Cable loss
2. Emission level = Reading Value + Correction factor
3. Margin value = Emission level – Limit value