FCC Co-Location Test Report

FCC ID	:	**QIS-B5338-168**
Equipment	:	**LTE Indoor CPE**
Model No.	:	**B5338-168**
Brand Name	:	**Huawei**
Applicant	:	**Huawei Technologies Co., Ltd.**
Address	:	**Administration Building, Headquarters of Huawei Technologies Co., Ltd., Bantian, Longgang District, Shenzhen, 518129, China.**
Standard	:	**47 CFR FCC Part 15.247** **47 CFR FCC Part 15.407** **47 CFR FCC Part 27 Subpart M** **47 CFR FCC Part 90 Subpart Z**
Received Date	:	**Sep. 23, 2016**
Tested Date	:	**Oct. 18 ~ Dec. 15, 2016**

We, International Certification Corp., would like to declare that the tested sample has been evaluated and in compliance with the requirement of the above standards. The test results contained in this report refer exclusively to the product. It may be duplicated completely for legal use with the approval of the applicant. It shall not be reproduced except in full without the written approval of our laboratory.

Reviewed by: **Approved by:**

Along Chen / Assistant Manager **Gary Chang / Manager**

Testing Laboratory 2732

Table of Contents

1 GENERAL DESCRIPTION 5

1.1 Information 5
1.2 The Equipment List 6
1.3 Test Standards 7
1.4 Measurement Uncertainty 7

2 TEST CONFIGURATION 8

2.1 Testing Condition 8
2.2 The Worst Test Modes and Channel Details 8

3 TRANSMITTER TEST RESULTS 9

3.1 Unwanted Emissions into Restricted Frequency Bands 9

4 TEST LABORATORY INFORMATION 20

Release Record

Report No.	Version	Description	Issued Date
FR690901-01CO	Rev. 01	Initial issue	Mar. 06, 2017

Summary of Test Results

FCC Rules	Test Items	Measured	Result
15.247(d) 15.407(b) 15.209 27.53(m)(4)(6) 90.1323	Radiated Emissions	[dBuV/m at 3m]: 375.00MHz 44.99 (Margin -1.01dB) - QP	Pass

1 General Description

1.1 Information

1.1.1 Specification of the Equipment under Test (EUT)

WLAN	
Operating Frequency	802.11b/g/n: 2412 MHz ~ 2462 MHz 802.11a/n/ac: 5180 MHz ~ 5240 MHz; 5745 ~ 5825 MHz
Modulation Type	802.11b: DSSS (DBPSK / DQPSK / CCK) 802.11a/g/n/ac: OFDM (BPSK / QPSK / 16QAM / 64QAM / 256QAM)
LTE	
Operating Frequency	Band 43 Channel Bandwidth: 5MHz: 3652.5 MHz ~ 3697.5 MHz Channel Bandwidth: 10MHz: 3655.0 MHz ~ 3695.0 MHz Channel Bandwidth: 15MHz: 3657.5 MHz ~ 3692.5 MHz Channel Bandwidth: 20MHz: 3660.0 MHz ~ 3690.0 MHz Band 41 Channel Bandwidth: 5MHz: 2498.5 MHz ~ 2687.5 MHz Channel Bandwidth: 10MHz: 2501.0 MHz ~ 2685.0 MHz Channel Bandwidth: 15MHz: 2503.5 MHz ~ 2682.5 MHz Channel Bandwidth: 20MHz: 2506.0 MHz ~ 2680.0 MHz
Modulaton Type	QPSK, 16QAM, 64QAM (Uplink)

1.1.2 Antenna Details

For LTE

Ant. No.	Type	Gain (dBi)		Connector
		2496 MHz – 2690 MHz	3600 MHz – 3800 MHz	
1	Dipole	4.1	2	R-SMA

For WLAN

Ant. No.	Type	Connector	Operating Frequencies (MHz) / Antenna Gain (dBi)		
			2400~2483.5	5150~5250	5725~5850
1	PIFA	UFL	2.45	1.3	2.96
2	PIFA	UFL	2.46	1.97	2.99

1.1.3 Power Supply Type of Equipment under Test (EUT)

Power Supply Type	12Vdc from adapter

1.2 The Equipment List

Test Item	Radiated Emission				
Test Site	966 chamber1 / (03CH01-WS)				
Tested Date	Nov. 29, 2016				
Instrument	**Manufacturer**	**Model No.**	**Serial No.**	**Calibration Date**	**Calibration Until**
Spectrum Analyzer	R&S	FSV40	101498	Nov. 25, 2016	Nov. 24, 2017
Horn Antenna 1G-18G	SCHWARZBECK	BBHA 9120 D	BBHA 9120 D 1096	Dec. 16, 2015	Dec. 15, 2016
Horn Antenna 18G-40G	SCHWARZBECK	BBHA 9170	BBHA 9170517	Oct. 25, 2016	Oct. 24, 2017
Preamplifier	Agilent	83017A	MY39501308	Oct. 06, 2016	Oct. 05, 2017
Preamplifier	EMC	EMC184045B	980192	Aug. 24, 2016	Aug. 23, 2017
RF Cable	HUBER+SUHNER	SUCOFLEX104	MY16014/4	Dec. 10, 2015	Dec. 09, 2016
RF Cable	HUBER+SUHNER	SUCOFLEX104	MY16019/4	Dec. 10, 2015	Dec. 09, 2016
RF Cable	HUBER+SUHNER	SUCOFLEX104	MY16139/4	Dec. 10, 2015	Dec. 09, 2016
Measurement Software	AUDIX	e3	6.120210g	NA	NA
Note: Calibration Interval of instruments listed above is one year.					

Test Item	Radiated Emission				
Test Site	966 chamber1 / (03CH01-WS)				
Tested Date	Dec. 15, 2016				
Instrument	**Manufacturer**	**Model No.**	**Serial No.**	**Calibration Date**	**Calibration Until**
Receiver	R&S	ESR3	101658	Nov. 24, 2016	Nov. 23, 2017
Bilog Antenna	SCHWARZBECK	VULB9168	VULB9168-522	Aug. 04, 2016	Aug. 03, 2017
Preamplifier	EMC	EMC02325	980225	Aug. 05, 2016	Aug. 04, 2017
LF cable 1M	EMC	EMCCFD400-NM-NM-1000	16052	Dec. 09, 2016	Dec. 08, 2017
LF cable 3M	Woken	CFD400NL-LW	CFD400NL-001	Dec. 09, 2016	Dec. 08, 2017
LF cable 10M	Woken	CFD400NL-LW	CFD400NL-002	Dec. 09, 2016	Dec. 08, 2017
Measurement Software	AUDIX	e3	6.120210g	NA	NA
Note: Calibration Interval of instruments listed above is one year.					

Test Item	RF Conducted				
Test Site	(TH01-WS)				
Tested Date	Oct. 18, 2016				
Instrument	**Manufacturer**	**Model No.**	**Serial No.**	**Calibration Date**	**Calibration Until**
Spectrum Analyzer	R&S	FSV40	101063	Feb. 17, 2016	Feb. 16, 2017
Measurement Software	Sporton	Sporton_1	1.3.30	NA	NA
Note: Calibration Interval of instruments listed above is one year.					

1.3 Test Standards

According to the specification of EUT, the EUT must comply with following standards and KDB documents.

47 CFR FCC Part 15.247
47 CFR FCC Part 15.407
47 CFR FCC Part 15.247
47 CFR FCC Part 15.247
ANSI C63.10-2013
ANSI C63.4-2014
FCC KDB 558074 D01 DTS Meas Guidance v03r05
FCC KDB 662911 D01 Multiple Transmitter Output v02r01
FCC KDB 789033 D02 General UNII Test Procedures New Rules v01r03
FCC KDB 971168 D01 Power Meas License Digital Systems v02r02
FCC KDB 971168 D02 Misc OOBE License Digital Systems v01
FCC KDB 412172 D01 Determining ERP and EIRP v01r01

1.4 Measurement Uncertainty

ISO/IEC 17025 requires that an estimate of the measurement uncertainties associated with the emissions test results be included in the report. The measurement uncertainties given below are based on a 95% confidence level (based on a coverage factor (k=2)

Measurement Uncertainty	
Parameters	**Uncertainty**
Radiated emission ≤ 1GHz	±3.66 dB
Radiated emission > 1GHz	±5.63 dB

2 Test Configuration

2.1 Testing Condition

Test Item	Test Site	Ambient Condition	Tested By
Radiated Emissions	03CH01-WS	20-24°C / 61-62%	Vincent Yeh Kevin Lee
Conducted Emissions	TH01-WS	22°C / 61%	Alex Huang

- FCC Designation No.: TW2732
- FCC site registration No.: 181692
- IC site registration No.: 10807A-1

2.2 The Worst Test Modes and Channel Details

Test item	Test Mode
Radiated Emissions	LTE B41 10M CH39700 + WLAN 2.4G 11b CH06 + WLAN 5G 11ac VHT80 CH155
	LTE B43 10M CH44540 + WLAN 2.4G 11b CH06 + WLAN 5G 11ac VHT80 CH155
Conducted Emissions	WLAN 2.4G 11b CH06 + WLAN 5G 11ac VHT80 CH155

NOTE
1. The selected channel is the maximum power channel of Wi-Fi module and LTE function
2. Conducted emission measurement is for Wi-Fi function only since Wi-Fi 2.4 / 5GHz share same antennas.

3 Transmitter Test Results

3.1 Unwanted Emissions into Restricted Frequency Bands

3.1.1 Limit of Unwanted Emissions into Restricted Frequency Bands

Restricted Band Emissions Limit			
Frequency Range (MHz)	**Field Strength (uV/m)**	**Field Strength (dBuV/m)**	**Measure Distance (m)**
0.009~0.490	2400/F(kHz)	48.5 - 13.8	300
0.490~1.705	24000/F(kHz)	33.8 - 23	30
1.705~30.0	30	29	30
30~88	100	40	3
88~216	150	43.5	3
216~960	200	46	3
Above 960	500	54	3

Note 1:
Qusai-Peak value is measured for frequency below 1GHz except for 9–90 kHz, 110–490 kHz frequency band. Peak and average value are measured for frequency above 1GHz. The limit on average radio frequency emission is as above table. The limit on peak radio frequency emissions is 20 dB above the maximum permitted average emission limit
Note 2:
Measurements may be performed at a distance other than what is specified provided. When performing measurements at a distance other than that specified, the results shall be extrapolated to the specified distance using an extrapolation factor as below, Frequency at or above 30 MHz: 20 dB/decade Frequency below 30 MHz: 40 dB/decade.

3.1.2 Test Procedures

1. Measurement is made at a semi-anechoic chamber that incorporates a turntable allowing a EUT rotation of 360°. A continuously-rotating, remotely-controlled turntable is installed at the test site to support the EUT and facilitate determination of the direction of maximum radiation for each EUT emission frequency. The EUT is placed at test table. For emissions testing at or below 1 GHz, the table height is 80 cm above the reference ground plane. For emission measurements above 1 GHz, the table height is 1.5 m.
2. Measurement is made with the antenna positioned in both the horizontal and vertical planes of polarization. The measurement antenna is varied in height (1m ~ 4m) above the reference ground plane to obtain the maximum signal strength. Distance between EUT and antenna is 3 m.
3. This investigation is performed with the EUT rotated 360°, the antenna height scanned between 1 m and 4 m, and the antenna rotated to repeat the measurements for both the horizontal and vertical antenna polarizations.

Note:

1. 120kHz measurement bandwidth of test receiver and Quasi-peak detector is for radiated emission below 1GHz.
2. RBW=1MHz, VBW=3MHz and Peak detector is for peak measured value of radiated emission above 1GHz.
3. RBW=1MHz, VBW=1/T and Peak detector is for average measured value of radiated emission above 1GHz.

3.1.3 Test Setup

Radiated Emissions below 1 GHz

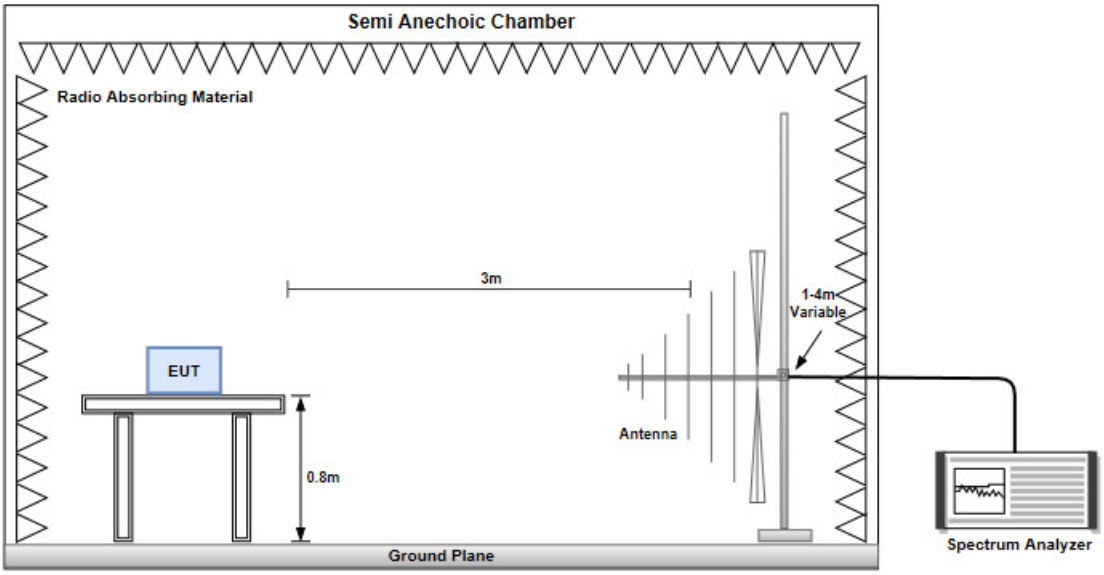

Radiated Emissions above 1 GHz

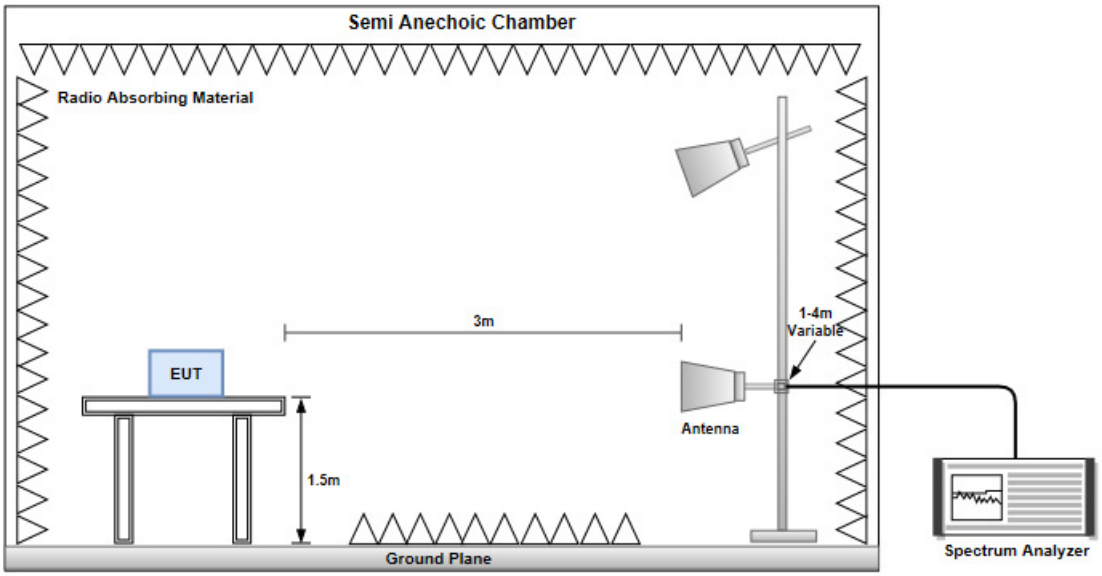

Transmitter Conducted Unwanted Emissions (30MHz~40GHz)

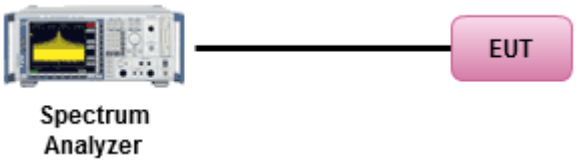

3.1.4 Transmitter Radiated Unwanted Emissions (Below 1GHz)

Mode	LTE B41 10M CH39700 + WLAN 2.4G 11b CH06 + WLAN 5G 11ac VHT80 CH155
Polarization	Horizontal

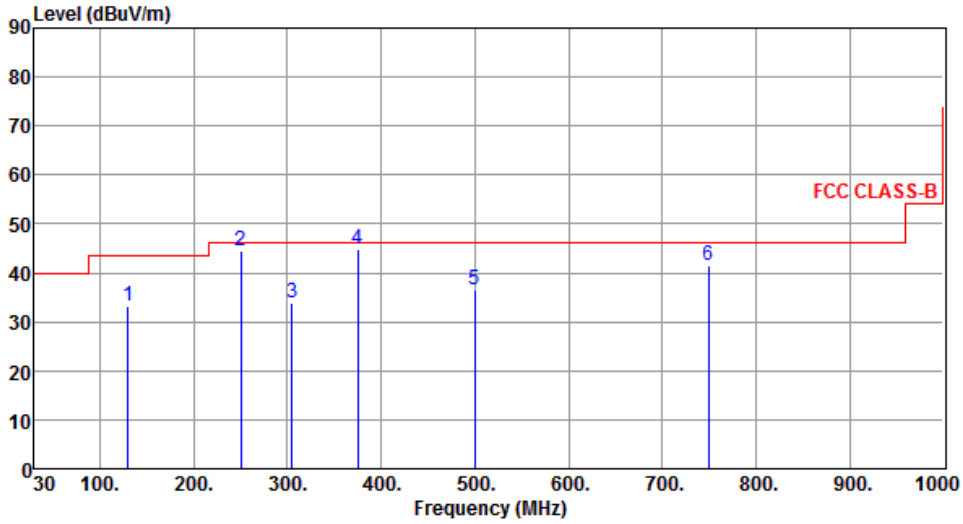

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	129.91	33.18	43.50	-10.32	42.22	-9.04	Peak	---	---
2	250.00	44.56	46.00	-1.44	53.77	-9.21	QP	100	163
3	304.51	33.85	46.00	-12.15	41.25	-7.40	Peak	---	---
4	375.00	44.99	46.00	-1.01	50.61	-5.62	QP	100	130
5	499.48	36.58	46.00	-9.42	39.40	-2.82	Peak	---	---
6	749.74	41.64	46.00	-4.36	39.82	1.82	Peak	---	---

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB)
*Factor includes antenna factor , cable loss and amplifier gain
Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).
Note 3: All spurious emissions below 30MHz are more than 20 dB below the limit.

Mode	LTE B41 10M CH39700 + WLAN 2.4G 11b CH06 + WLAN 5G 11ac VHT80 CH155
Polarization	Vertical

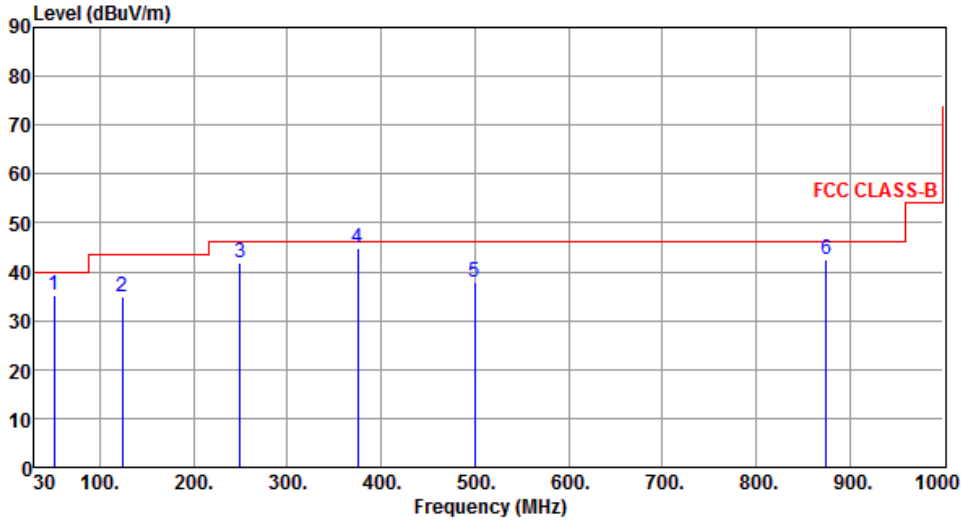

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	51.34	35.31	40.00	-4.69	43.11	-7.80	Peak	---	---
2	124.09	34.87	43.50	-8.63	44.56	-9.69	Peak	---	---
3	249.22	41.69	46.00	-4.31	50.92	-9.23	Peak	---	---
4	375.00	44.88	46.00	-1.12	50.50	-5.62	QP	137	241
5	499.48	37.87	46.00	-8.13	40.69	-2.82	Peak	---	---
6	874.87	42.35	46.00	-3.65	38.57	3.78	Peak	---	---

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB)
*Factor includes antenna factor , cable loss and amplifier gain
Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).
Note 3: All spurious emissions below 30MHz are more than 20 dB below the limit.

Mode	LTE B43 10M CH44540 + WLAN 2.4G 11b CH06 + WLAN 5G 11ac VHT80 CH155
Polarization	Horizontal

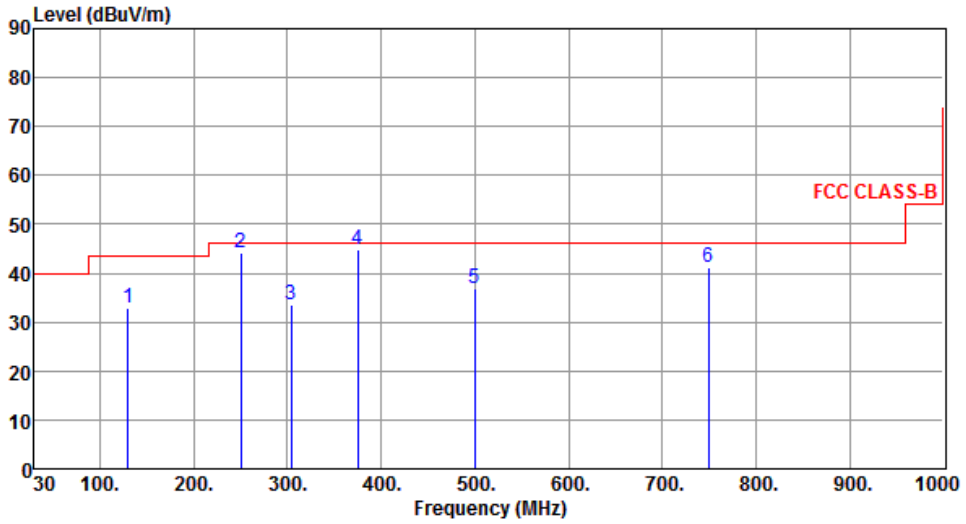

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	130.23	32.76	43.50	-10.74	41.77	-9.01	Peak	---	---
2	250.00	44.32	46.00	-1.68	53.53	-9.21	QP	100	170
3	304.21	33.52	46.00	-12.48	40.93	-7.41	Peak	---	---
4	375.00	44.97	46.00	-1.03	50.59	-5.62	QP	100	138
5	499.68	36.88	46.00	-9.12	39.70	-2.82	Peak	---	---
6	749.74	41.12	46.00	-4.88	39.30	1.82	Peak	---	---

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB)
*Factor includes antenna factor , cable loss and amplifier gain
Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).
Note 3: All spurious emissions below 30MHz are more than 20 dB below the limit.

Mode	LTE B43 10M CH44540 + WLAN 2.4G 11b CH06 + WLAN 5G 11ac VHT80 CH155
Polarization	Vertical

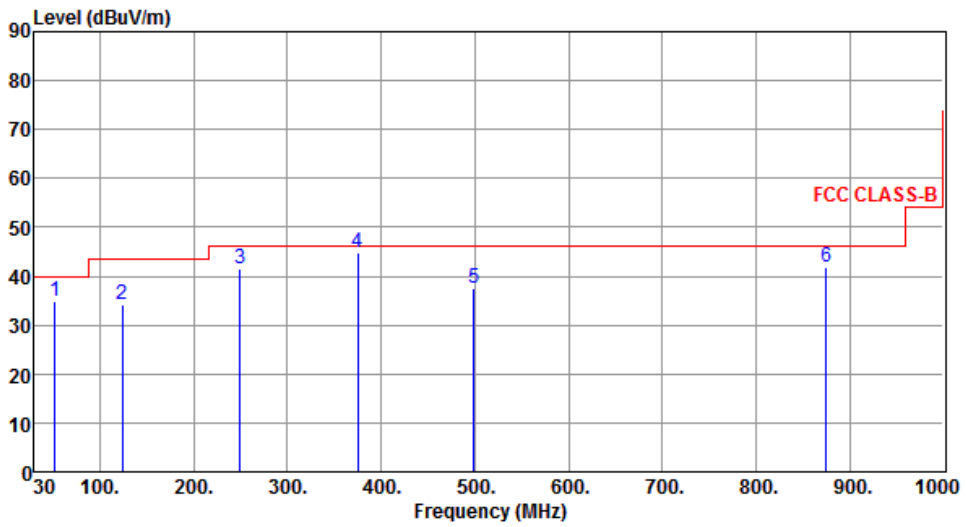

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	51.78	35.02	40.00	-4.98	42.88	-7.86	Peak	---	---
2	124.26	34.21	43.50	-9.29	43.88	-9.67	Peak	---	---
3	249.69	41.46	46.00	-4.54	50.68	-9.22	Peak	---	---
4	375.00	44.85	46.00	-1.15	50.47	-5.62	QP	132	267
5	499.32	37.58	46.00	-8.42	40.40	-2.82	Peak	---	---
6	874.62	41.90	46.00	-4.10	38.13	3.77	Peak	---	---

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB)
*Factor includes antenna factor , cable loss and amplifier gain
Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).
Note 3: All spurious emissions below 30MHz are more than 20 dB below the limit.

3.1.5 Transmitter Radiated Unwanted Emissions (Above 1GHz)

Mode	LTE B41 10M CH39700 + WLAN 2.4G 11b CH06 + WLAN 5G 11ac VHT80 CH155
Polarization	Horizontal

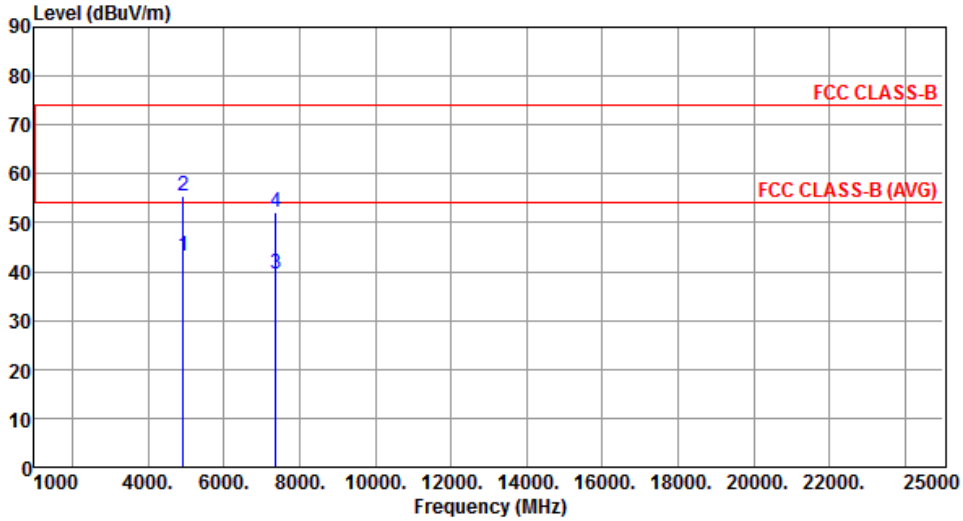

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	4938.00	43.21	54.00	-10.79	39.31	3.90	Average	123	305
2	4938.00	55.41	74.00	-18.59	51.51	3.90	Peak	123	305
3	7375.00	39.67	54.00	-14.33	31.14	8.53	Average	114	272
4	7375.00	52.30	74.00	-21.70	43.77	8.53	Peak	114	272

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB)
*Factor includes antenna factor , cable loss and amplifier gain
Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Mode	LTE B41 10M CH39700 + WLAN 2.4G 11b CH06 + WLAN 5G 11ac VHT80 CH155
Polarization	Vertical

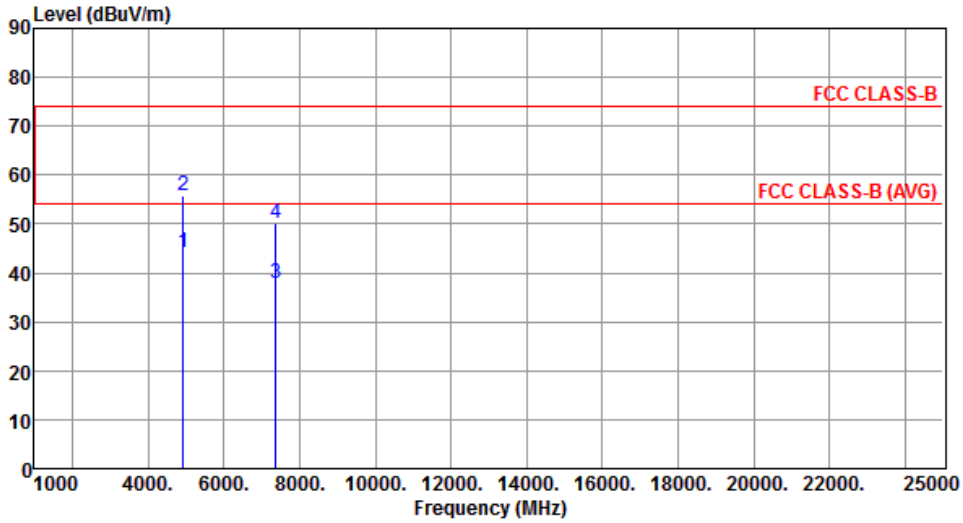

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	4938.00	44.17	54.00	-9.83	40.27	3.90	Average	258	0
2	4938.00	55.82	74.00	-18.18	51.92	3.90	Peak	258	0
3	7375.00	37.74	54.00	-16.26	29.21	8.53	Average	139	308
4	7375.00	50.20	74.00	-23.80	41.67	8.53	Peak	139	308

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB)
*Factor includes antenna factor , cable loss and amplifier gain
Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Mode	LTE B43 10M CH44540 + WLAN 2.4G 11b CH06 + WLAN 5G 11ac VHT80 CH155
Polarization	Horizontal

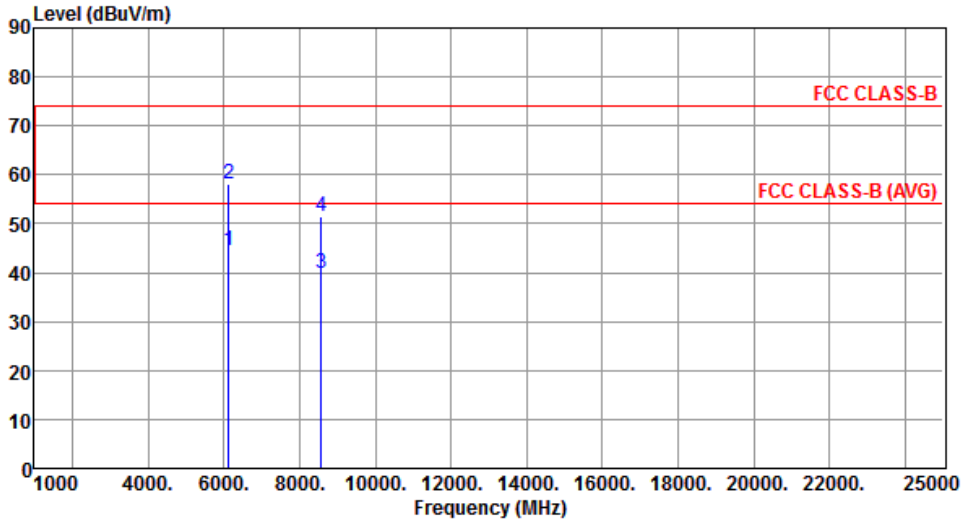

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	6132.00	44.65	54.00	-9.35	40.73	3.92	Average	135	61
2	6132.00	58.13	74.00	-15.87	54.21	3.92	Peak	135	61
3	8569.00	39.76	54.00	-14.24	29.93	9.83	Average	115	137
4	8569.00	51.57	74.00	-22.43	41.74	9.83	Peak	115	137

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB)
*Factor includes antenna factor , cable loss and amplifier gain
Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Mode	LTE B43 10M CH44540 + WLAN 2.4G 11b CH06 + WLAN 5G 11ac VHT80 CH155
Polarization	Vertical

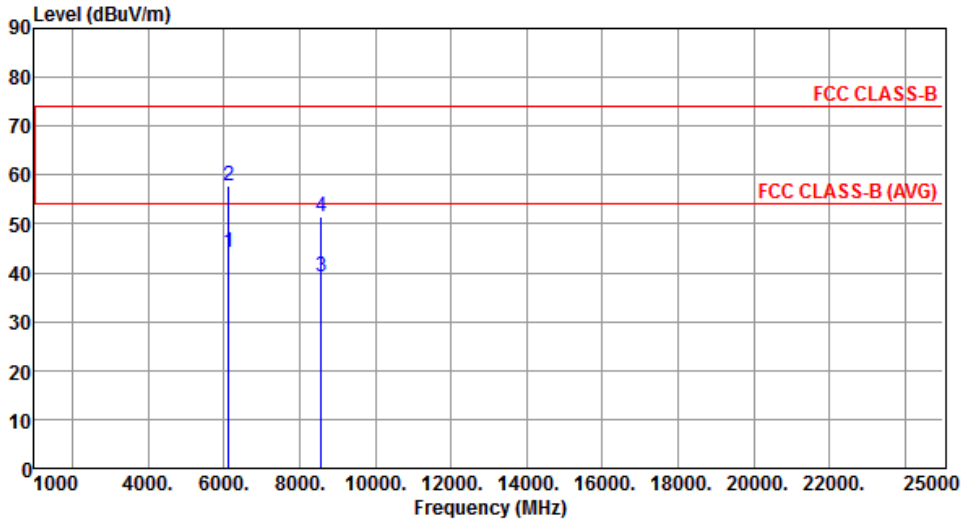

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	6132.00	44.27	54.00	-9.73	40.35	3.92	Average	152	264
2	6132.00	57.83	74.00	-16.17	53.91	3.92	Peak	152	264
3	8569.00	39.21	54.00	-14.79	29.38	9.83	Average	134	328
4	8569.00	51.60	74.00	-22.40	41.77	9.83	Peak	134	328

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB)
*Factor includes antenna factor , cable loss and amplifier gain
Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

3.1.6 Conducted Emissions (30MHz~40GHz)

Conducted Emission Plot of Antenna port 1

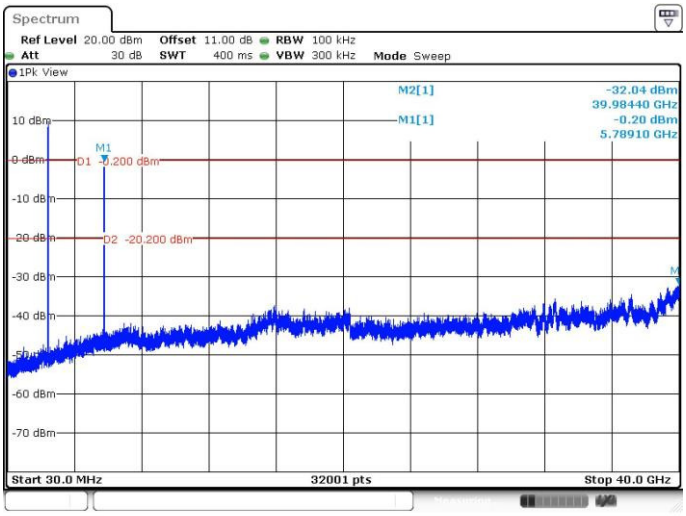

Conducted Emission Plot of Antenna port 2

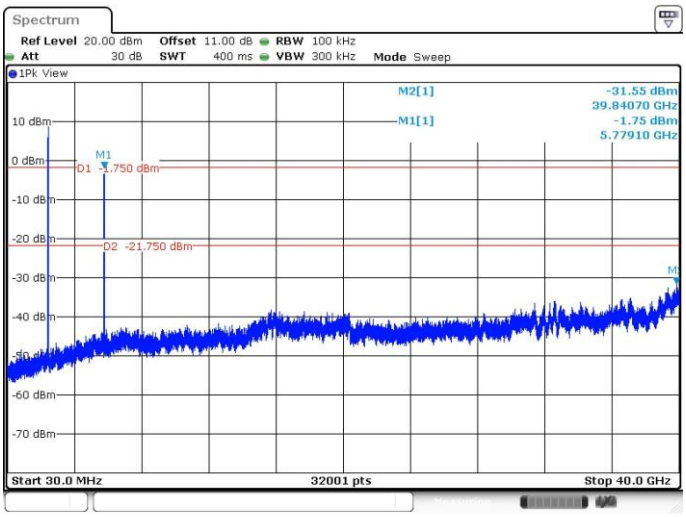

4 Test laboratory information

Established in 2012, ICC provides foremost EMC & RF Testing and advisory consultation services by our skilled engineers and technicians. Our services employ a wide variety of advanced edge test equipment and one of the widest certification extents in the business.

International Certification Corp (EMC and Wireless Communication Laboratory), it is our definitive objective is to institute long term, trust-based associations with our clients. The expectation we set up with our clients is based on outstanding service, practical expertise and devotion to a certified value structure. Our passion is to grant our clients with best EMC / RF services by oriented knowledgeable and accommodating staff.

Our Test sites are located at Linkou District and Kwei Shan District. Location map can be found on our website http://www.icertifi.com.tw.

Linkou	**Kwei Shan**	**Kwei Shan Site II**
Tel: 886-2-2601-1640	Tel: 886-3-271-8666	Tel: 886-3-271-8640
No. 30-2, Ding Fwu Tsuen, Lin Kou District, New Taipei City, Taiwan, R.O.C.	No. 3-1, Lane 6, Wen San 3rd St., Kwei Shan District, Tao Yuan City 333, Taiwan, R.O.C.	No. 14-1, Lane 19, Wen San 3rd St., Kwei Shan District, Tao Yuan City 333, Taiwan, R.O.C..

If you have any suggestion, please feel free to contact us as below information

Tel: 886-3-271-8666
Fax: 886-3-318-0155
Email: ICC_Service@icertifi.com.tw

═END═