


Site: AC1	Time: 2015/01/02 - 11:05
Limit: FCC_Part15.209_RE(3m)	Engineer: Roy Cheng
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Wireless LAN Access Point	Power: AC 120V/60Hz
Test Mode: Transmit at channel 5700MHz by 802.11ac-VHT20 Ant 1	

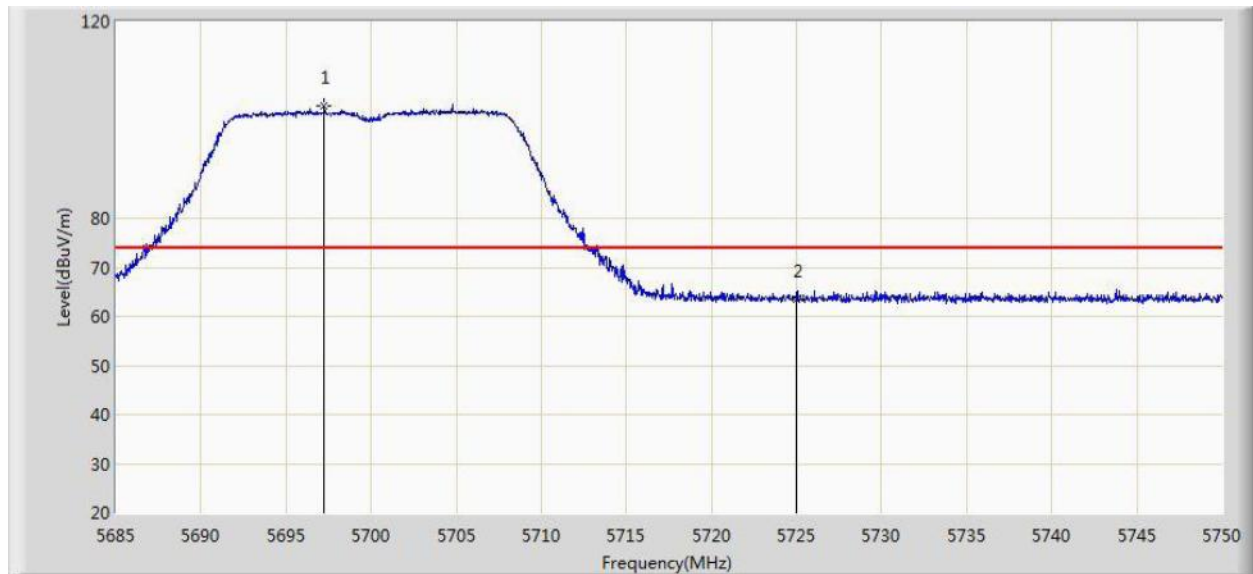


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5697.252	102.812	64.927	N/A	N/A	37.885	PK
2			5725.000	63.519	25.529	-10.481	74.000	37.990	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2015/01/02 - 11:06
Limit: FCC_Part15.209_RE(3m)	Engineer: Roy Cheng
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Wireless LAN Access Point	Power: AC 120V/60Hz
Test Mode: Transmit at channel 5700MHz by 802.11ac-VHT20 Ant 1	

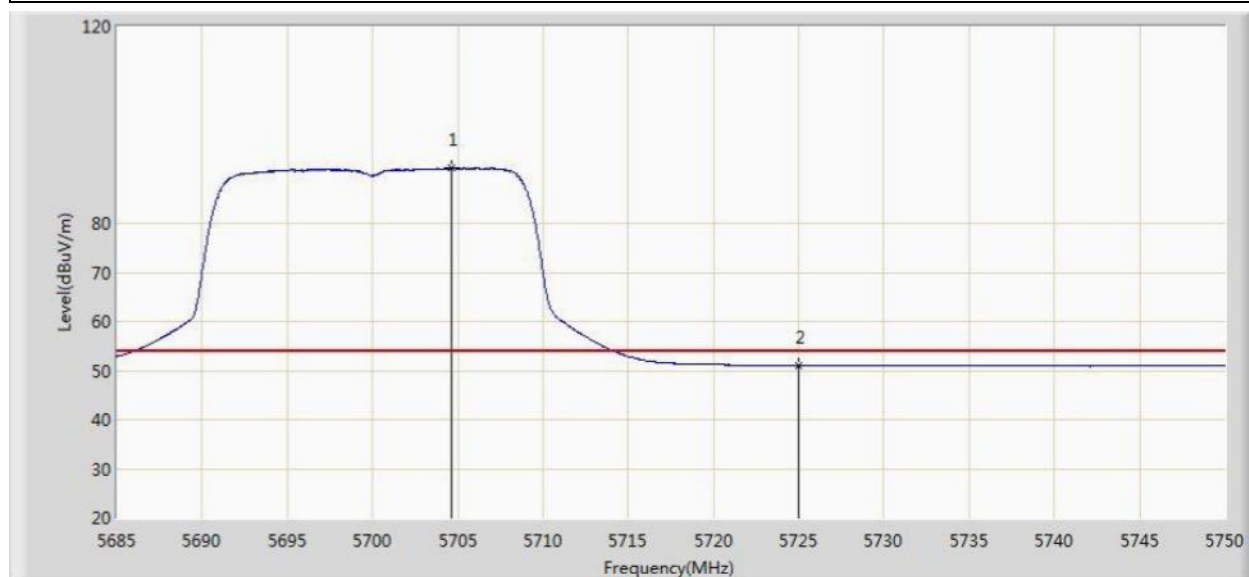


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5704.598	91.275	53.369	N/A	N/A	37.906	AV
2			5725.000	50.970	12.980	-3.030	54.000	37.990	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2015/01/02 - 11:07
Limit: FCC_Part15.209_RE(3m)	Engineer: Roy Cheng
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Wireless LAN Access Point	Power: AC 120V/60Hz
Test Mode: Transmit at channel 5745MHz by 802.11ac-VHT20 Ant 1	

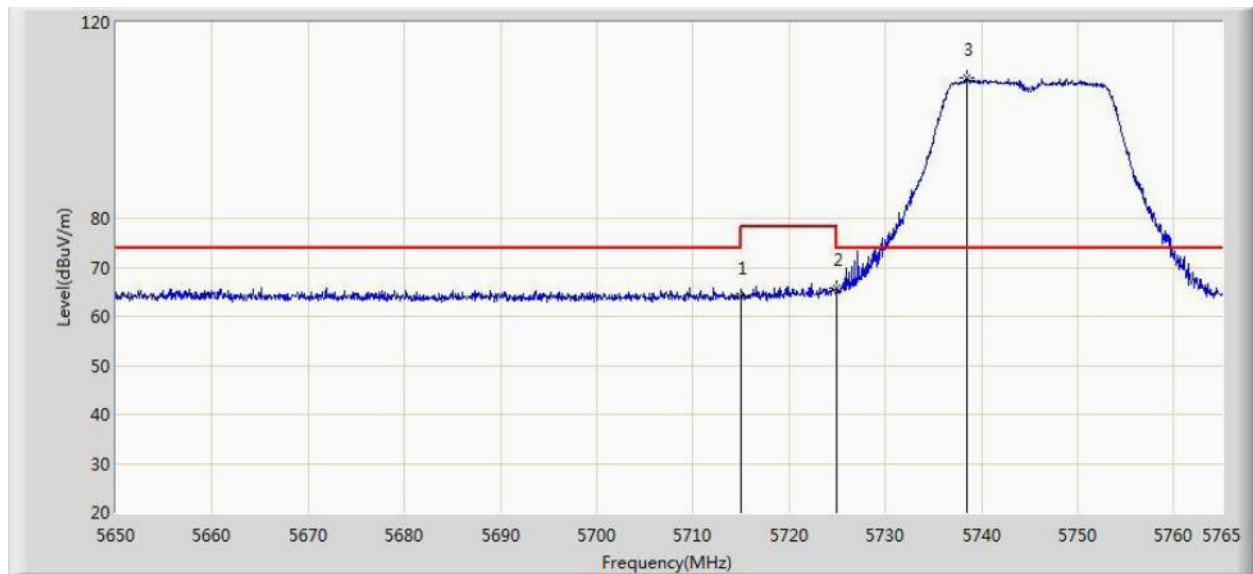


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5715.000	64.145	26.196	-9.855	74.000	37.949	PK
2			5725.000	65.684	27.694	-12.516	78.200	37.990	PK
3		*	5738.435	108.777	70.732	N/A	N/A	38.045	PK

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2015/01/02 - 11:09
Limit: FCC_Part15.209_RE(3m)	Engineer: Roy Cheng
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Wireless LAN Access Point	Power: AC 120V/60Hz
Test Mode: Transmit at channel 5745MHz by 802.11ac-VHT20 Ant 1	

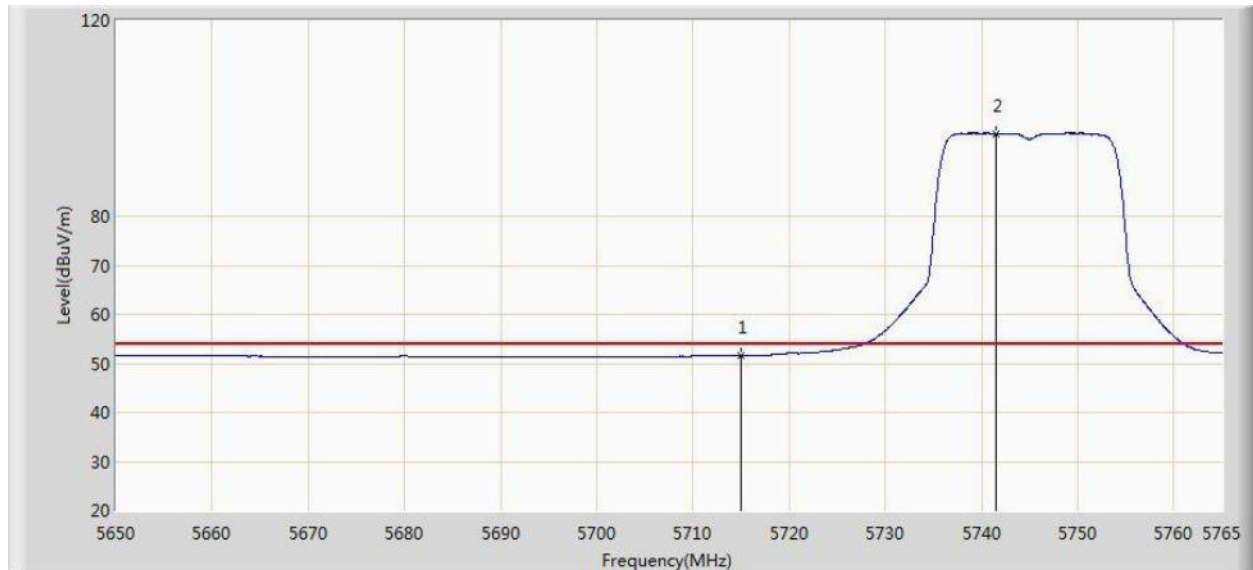


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5715.000	51.600	13.651	-2.400	54.000	37.949	AV
2		*	5741.540	96.867	58.810	N/A	N/A	38.057	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2015/01/02 - 11:10
Limit: FCC_Part15.209_RE(3m)	Engineer: Roy Cheng
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Wireless LAN Access Point	Power: AC 120V/60Hz
Test Mode: Transmit at channel 5745MHz by 802.11ac-VHT20 Ant 1	

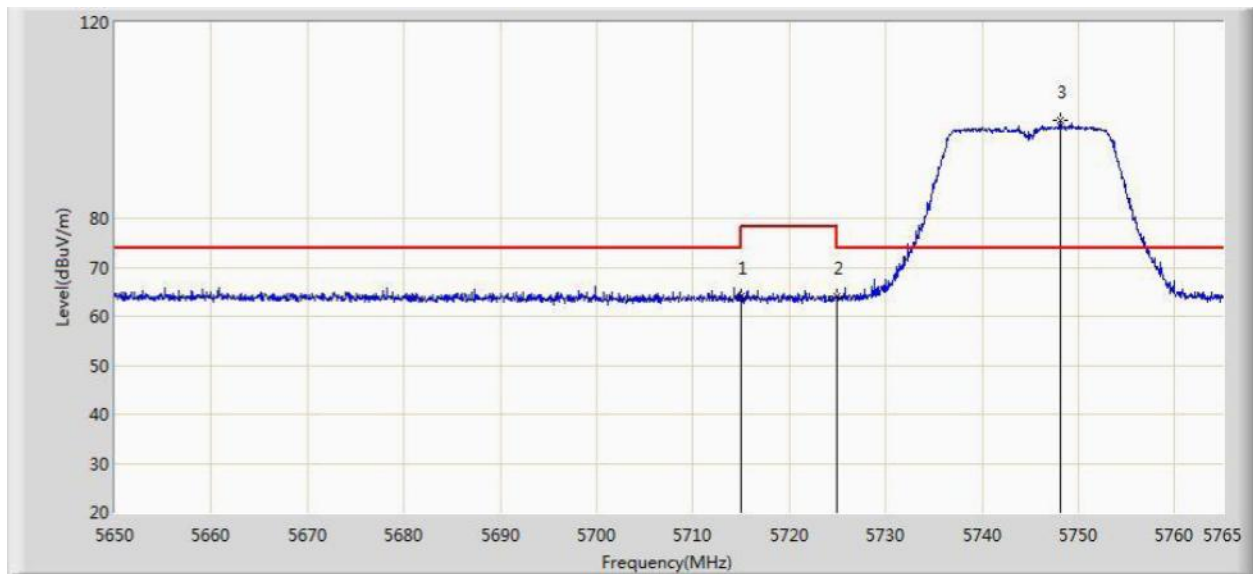


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5715.000	64.085	26.136	-9.915	74.000	37.949	PK
2			5725.000	64.042	26.052	-14.158	78.200	37.990	PK
3		*	5748.095	99.858	61.771	N/A	N/A	38.087	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2015/01/02 - 11:11
Limit: FCC_Part15.209_RE(3m)	Engineer: Roy Cheng
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Wireless LAN Access Point	Power: AC 120V/60Hz
Test Mode: Transmit at channel 5745MHz by 802.11ac-VHT20 Ant 1	

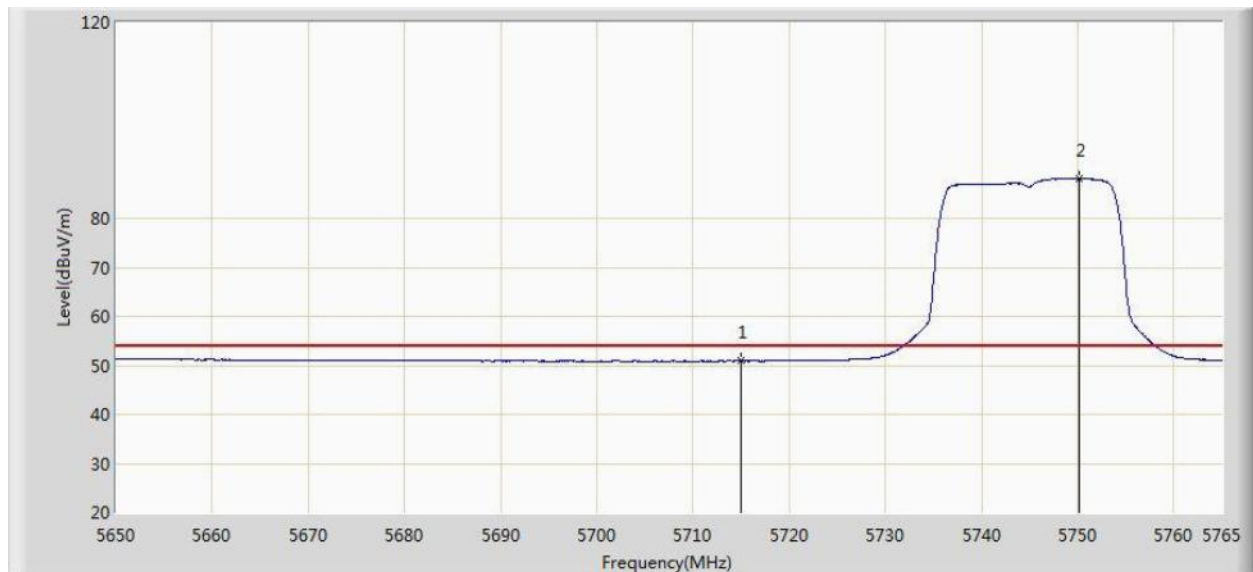


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5715.000	50.906	12.957	-3.094	54.000	37.949	AV
2		*	5750.165	88.193	50.096	N/A	N/A	38.097	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2015/01/02 - 11:12
Limit: FCC_Part15.209_RE(3m)	Engineer: Roy Cheng
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Wireless LAN Access Point	Power: AC 120V/60Hz
Test Mode: Transmit at channel 5825MHz by 802.11ac-VHT20 Ant 1	

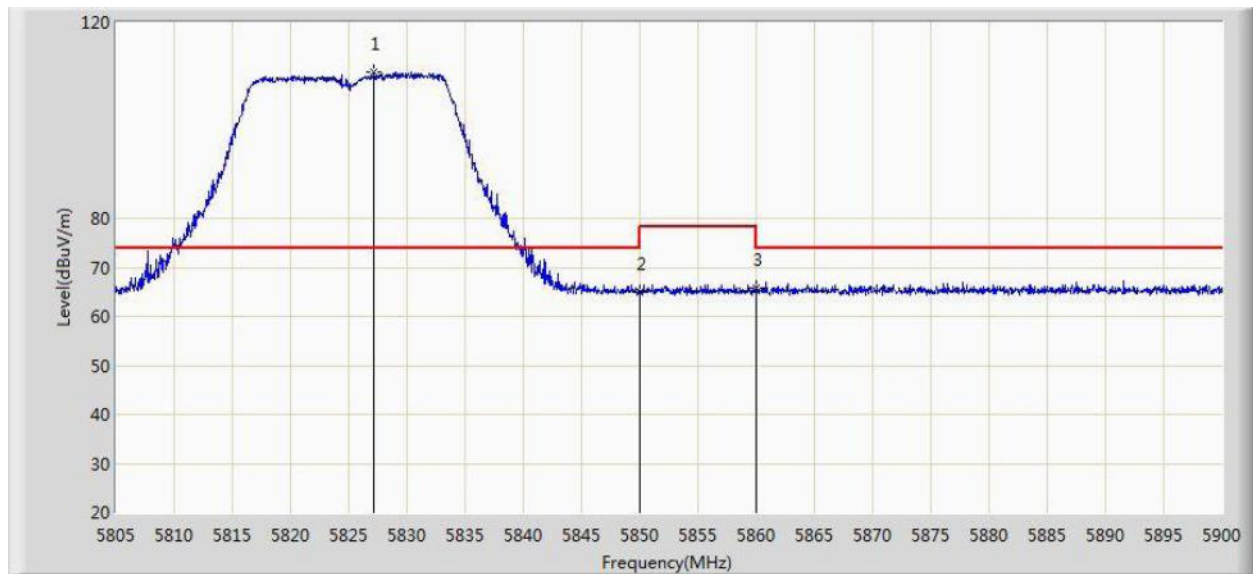


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5827.183	109.892	71.527	N/A	N/A	38.364	PK
2			5850.000	64.816	26.363	-13.384	78.200	38.454	PK
3			5860.000	65.849	27.371	-8.151	74.000	38.478	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2015/01/02 - 11:14
Limit: FCC_Part15.209_RE(3m)	Engineer: Roy Cheng
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Wireless LAN Access Point	Power: AC 120V/60Hz
Test Mode: Transmit at channel 5825MHz by 802.11ac-VHT20 Ant 1	

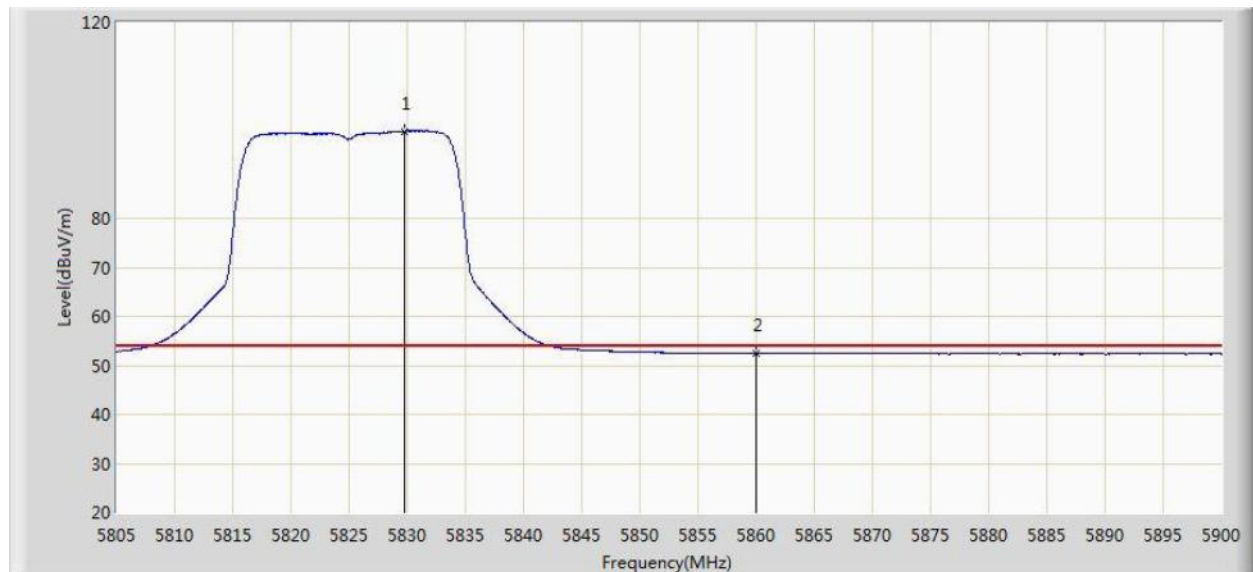


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5829.748	97.824	59.448	N/A	N/A	38.376	AV
2			5860.000	52.381	13.903	-1.619	54.000	38.478	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2015/01/02 - 11:15
Limit: FCC_Part15.209_RE(3m)	Engineer: Roy Cheng
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Wireless LAN Access Point	Power: AC 120V/60Hz
Test Mode: Transmit at channel 5825MHz by 802.11ac-VHT20 Ant 1	

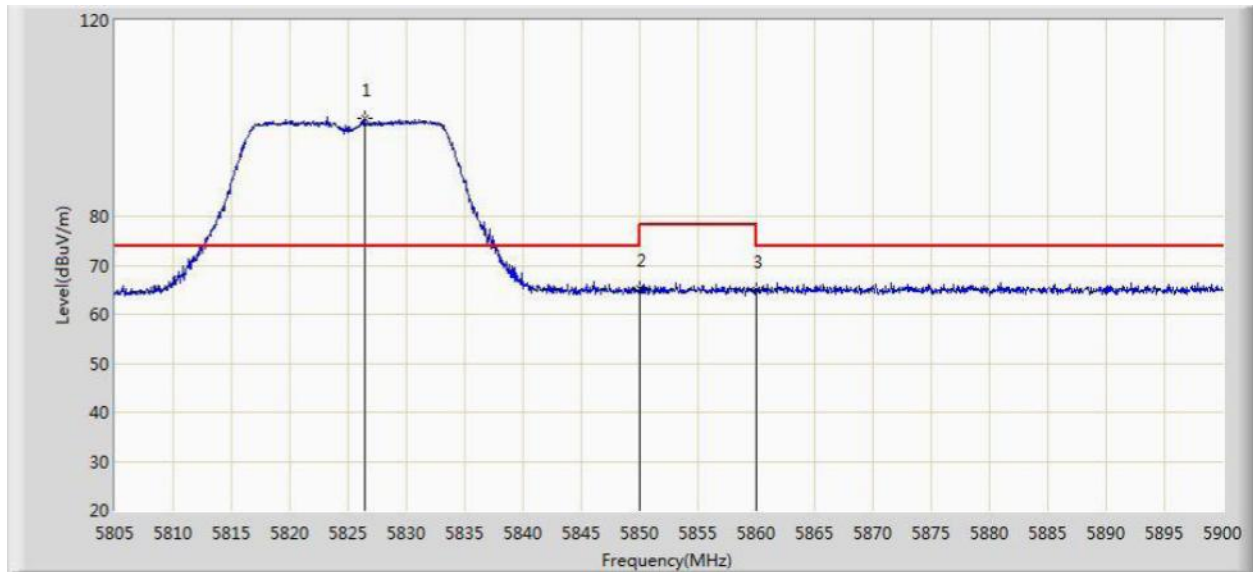


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5826.422	100.048	61.686	N/A	N/A	38.362	PK
2			5850.000	65.337	26.884	-12.863	78.200	38.454	PK
3			5860.000	65.055	26.577	-8.945	74.000	38.478	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2015/01/02 - 11:20
Limit: FCC_Part15.209_RE(3m)	Engineer: Roy Cheng
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Wireless LAN Access Point	Power: AC 120V/60Hz
Test Mode: Transmit at channel 5825MHz by 802.11ac-VHT20 Ant 1	

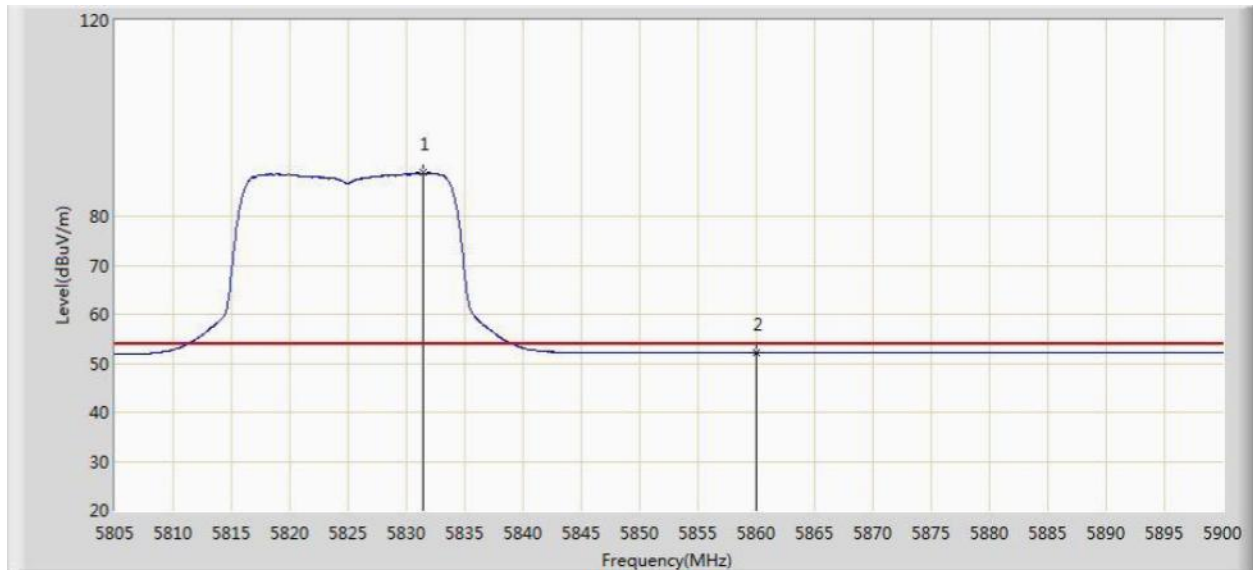


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5831.410	88.847	50.464	N/A	N/A	38.383	AV
2			5860.000	52.210	13.732	-1.790	54.000	38.478	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2015/01/02 - 11:26
Limit: FCC_Part15.209_RE(3m)	Engineer: Roy Cheng
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Wireless LAN Access Point	Power: AC 120V/60Hz
Test Mode: Transmit at channel 5190MHz by 802.11ac-VHT40 Ant 1	

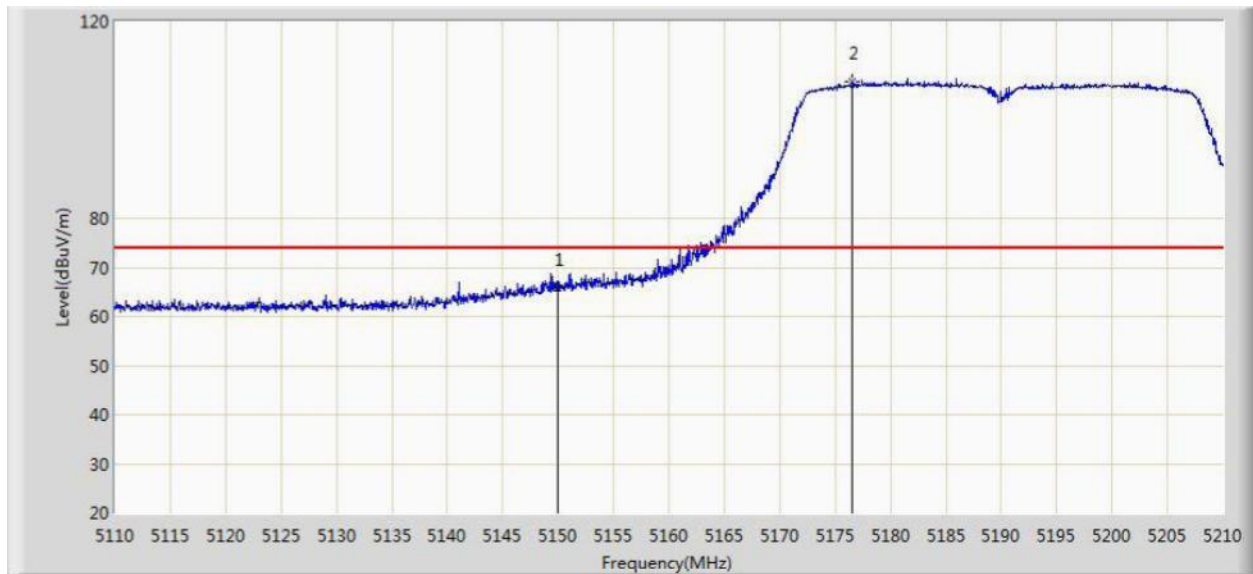


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5150.000	65.726	28.274	-8.274	74.000	37.452	PK
2		*	5176.550	107.811	70.429	N/A	N/A	37.382	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2015/01/02 - 11:24
Limit: FCC_Part15.209_RE(3m)	Engineer: Roy Cheng
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Wireless LAN Access Point	Power: AC 120V/60Hz
Test Mode: Transmit at channel 5190MHz by 802.11ac-VHT40 Ant 1	

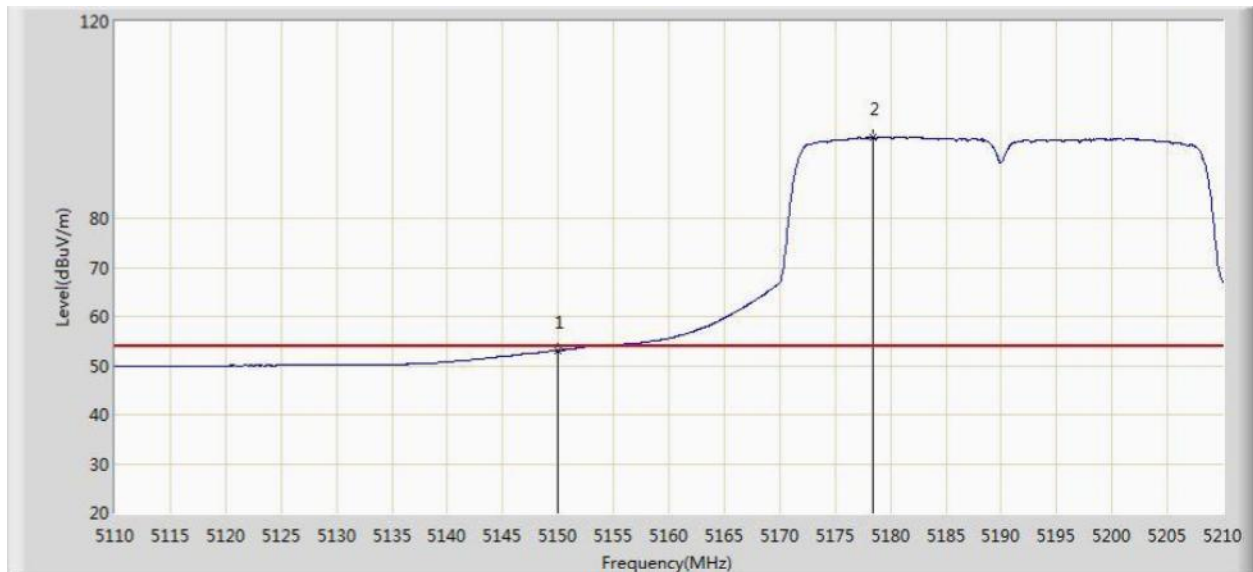


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5150.000	53.062	15.610	-0.938	54.000	37.452	AV
2		*	5178.400	96.445	59.068	N/A	N/A	37.378	AV

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2015/01/02 - 11:26
Limit: FCC_Part15.209_RE(3m)	Engineer: Roy Cheng
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Wireless LAN Access Point	Power: AC 120V/60Hz
Test Mode: Transmit at channel 5190MHz by 802.11ac-VHT40 Ant 1	

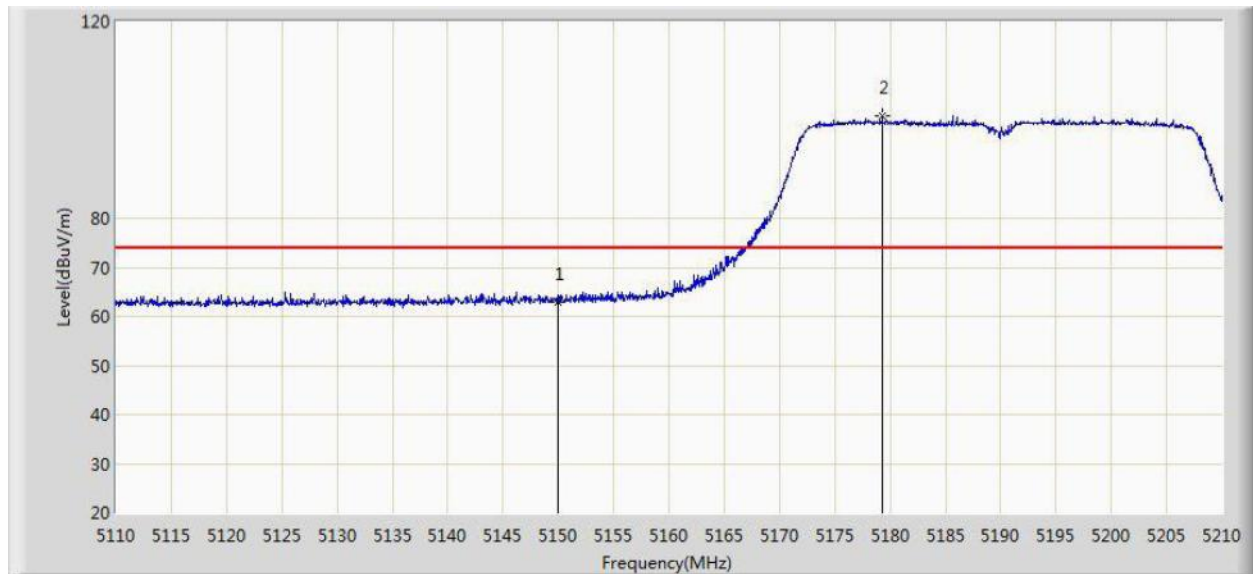


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5150.000	62.822	25.370	-11.178	74.000	37.452	PK
2		*	5179.300	100.751	63.376	N/A	N/A	37.375	PK

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2015/01/02 - 11:29
Limit: FCC_Part15.209_RE(3m)	Engineer: Roy Cheng
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Wireless LAN Access Point	Power: AC 120V/60Hz
Test Mode: Transmit at channel 5190MHz by 802.11ac-VHT40 Ant 1	

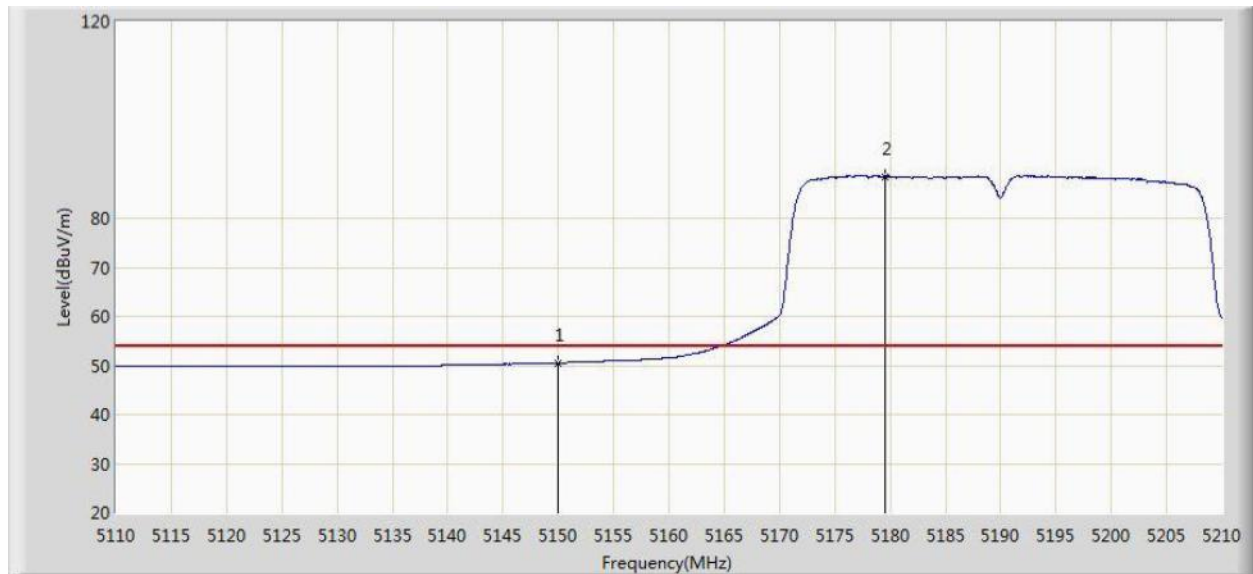


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5150.000	50.536	13.084	-3.464	54.000	37.452	AV
2		*	5179.600	88.541	51.166	N/A	N/A	37.374	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2015/01/02 - 11:34
Limit: FCC_Part15.209_RE(3m)	Engineer: Roy Cheng
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Wireless LAN Access Point	Power: AC 120V/60Hz
Test Mode: Transmit at channel 5310MHz by 802.11ac-VHT40 Ant 1	

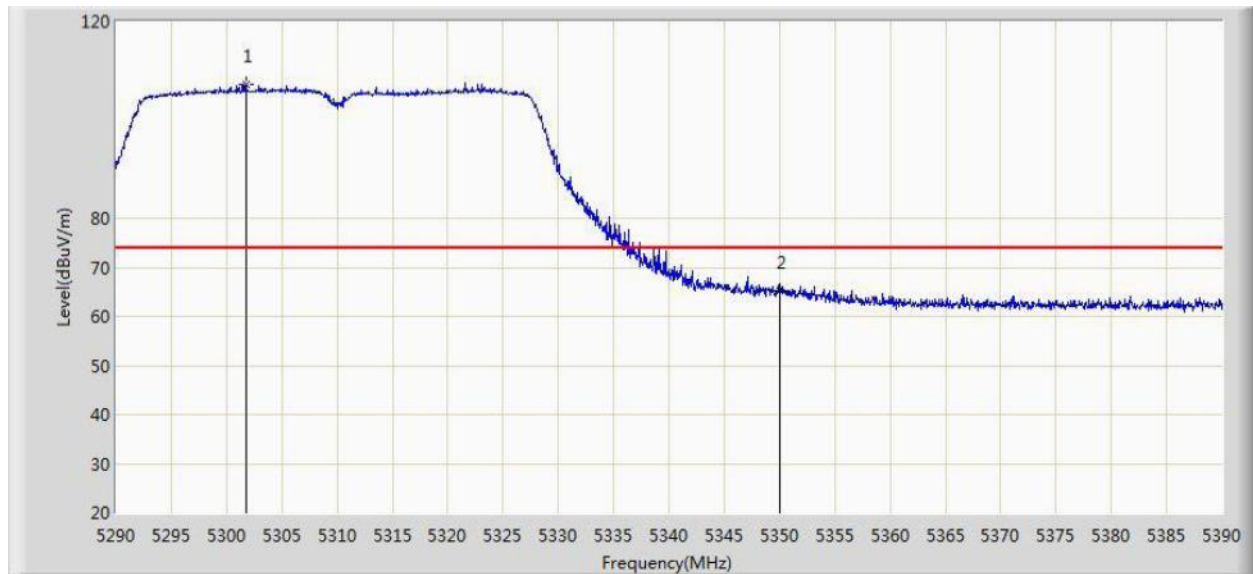


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5301.750	107.242	70.054	N/A	N/A	37.188	PK
2			5350.000	65.247	27.961	-8.753	74.000	37.286	PK

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2015/01/02 - 11:32
Limit: FCC_Part15.209_RE(3m)	Engineer: Roy Cheng
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Wireless LAN Access Point	Power: AC 120V/60Hz
Test Mode: Transmit at channel 5310MHz by 802.11ac-VHT40 Ant 1	

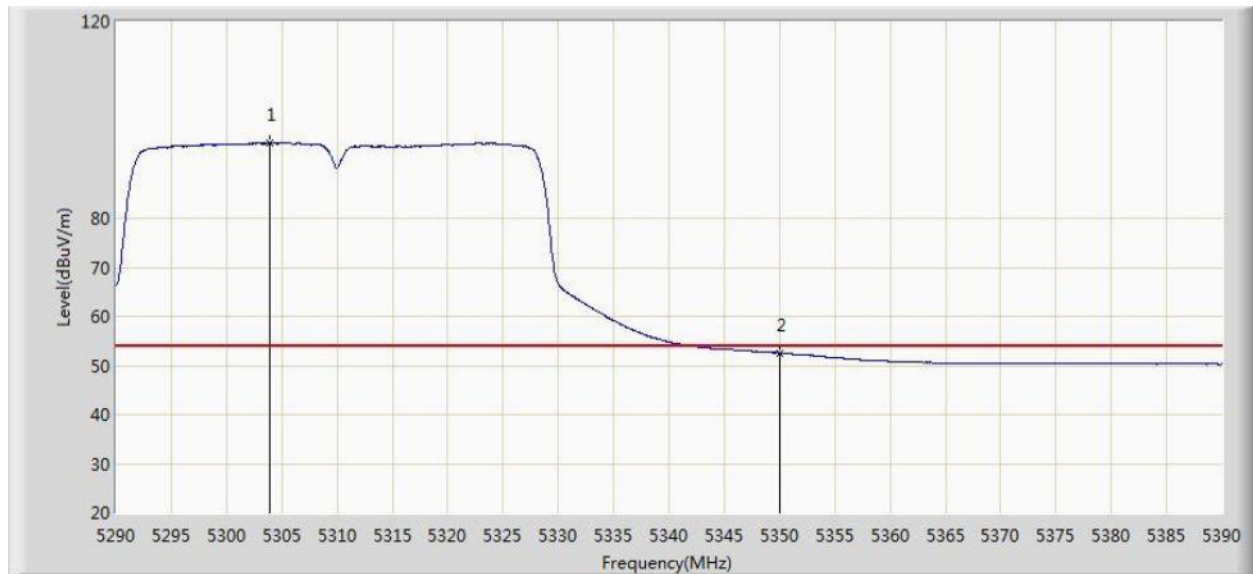


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5303.900	95.315	58.124	N/A	N/A	37.191	AV
2			5350.000	52.552	15.266	-1.448	54.000	37.286	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2015/01/02 - 11:35
Limit: FCC_Part15.209_RE(3m)	Engineer: Roy Cheng
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Wireless LAN Access Point	Power: AC 120V/60Hz
Test Mode: Transmit at channel 5310MHz by 802.11ac-VHT40 Ant 1	

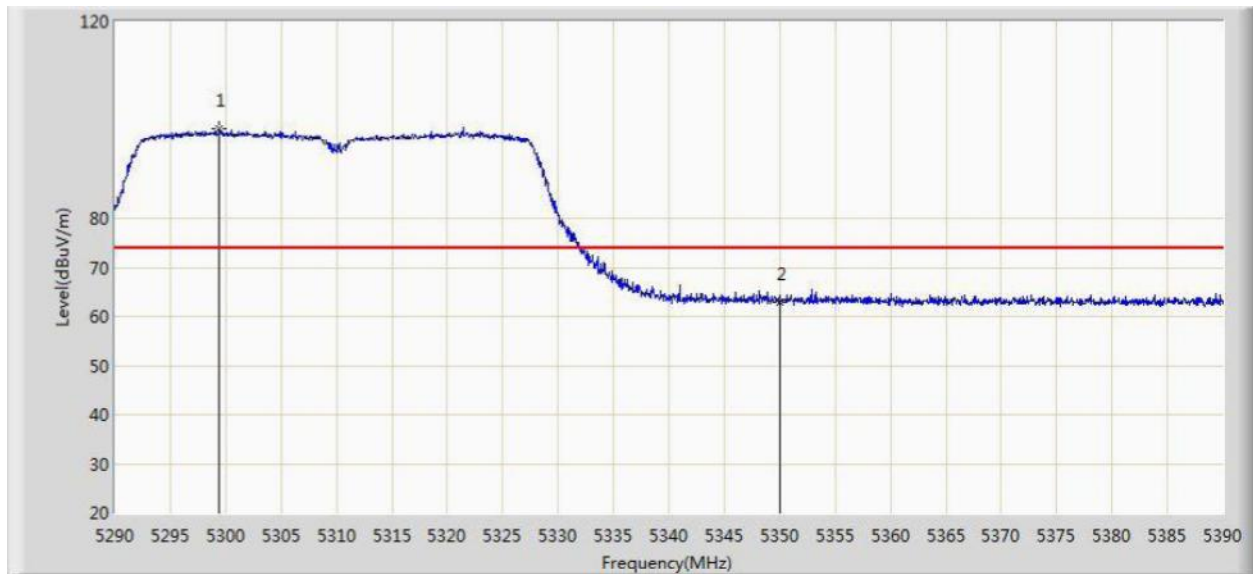


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5299.400	98.288	61.103	N/A	N/A	37.185	PK
2			5350.000	62.957	25.671	-11.043	74.000	37.286	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2015/01/02 - 11:36
Limit: FCC_Part15.209_RE(3m)	Engineer: Roy Cheng
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Wireless LAN Access Point	Power: AC 120V/60Hz
Test Mode: Transmit at channel 5310MHz by 802.11ac-VHT40 Ant 1	

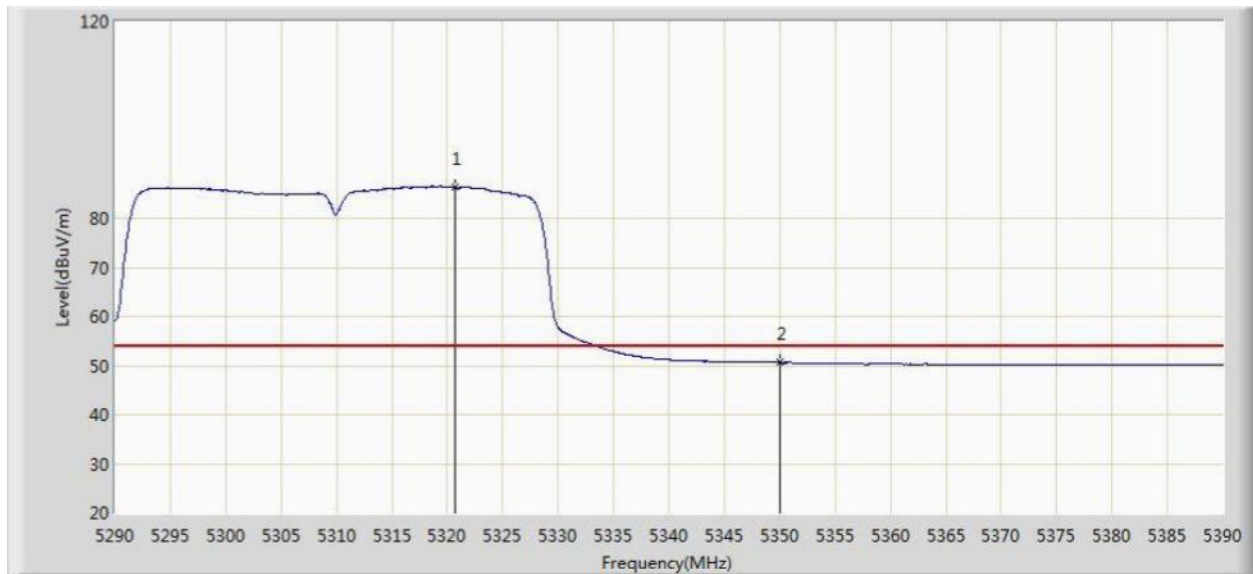


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5320.750	86.382	49.167	N/A	N/A	37.215	AV
2			5350.000	50.587	13.301	-3.413	54.000	37.286	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2015/01/02 - 11:37
Limit: FCC_Part15.209_RE(3m)	Engineer: Roy Cheng
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Wireless LAN Access Point	Power: AC 120V/60Hz
Test Mode: Transmit at channel 5510MHz by 802.11ac-VHT40 Ant 1	

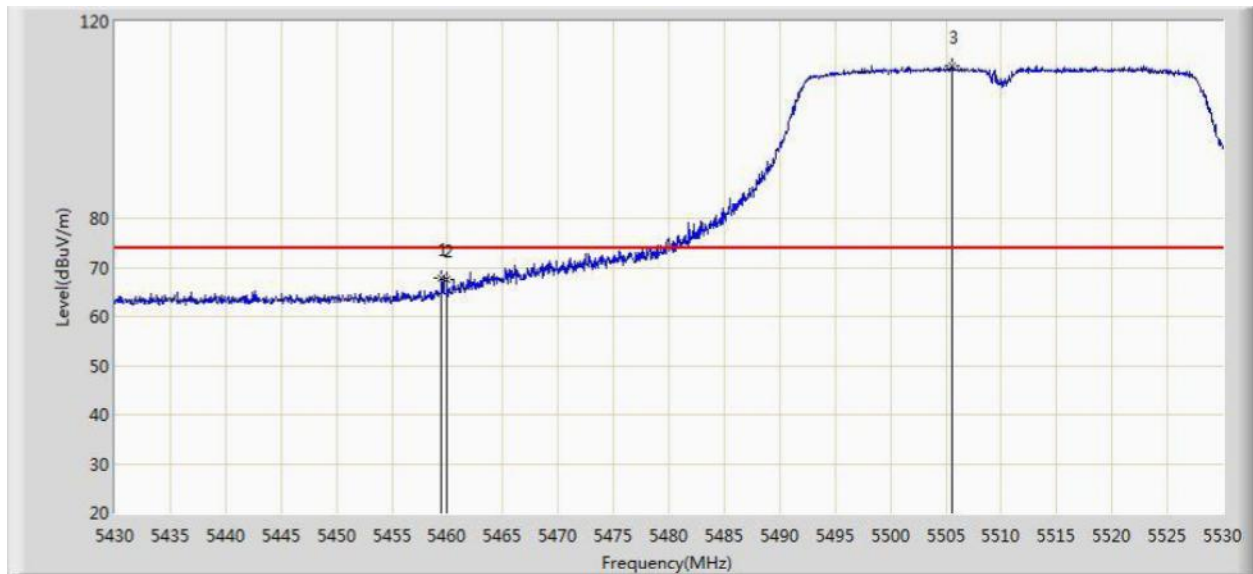


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5459.500	67.850	30.289	-6.150	74.000	37.561	PK
2			5460.000	67.466	29.903	-6.534	74.000	37.563	PK
3		*	5505.550	111.093	73.463	N/A	N/A	37.630	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2015/01/02 - 11:40
Limit: FCC_Part15.209_RE(3m)	Engineer: Roy Cheng
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Wireless LAN Access Point	Power: AC 120V/60Hz
Test Mode: Transmit at channel 5510MHz by 802.11ac-VHT40 Ant 1	

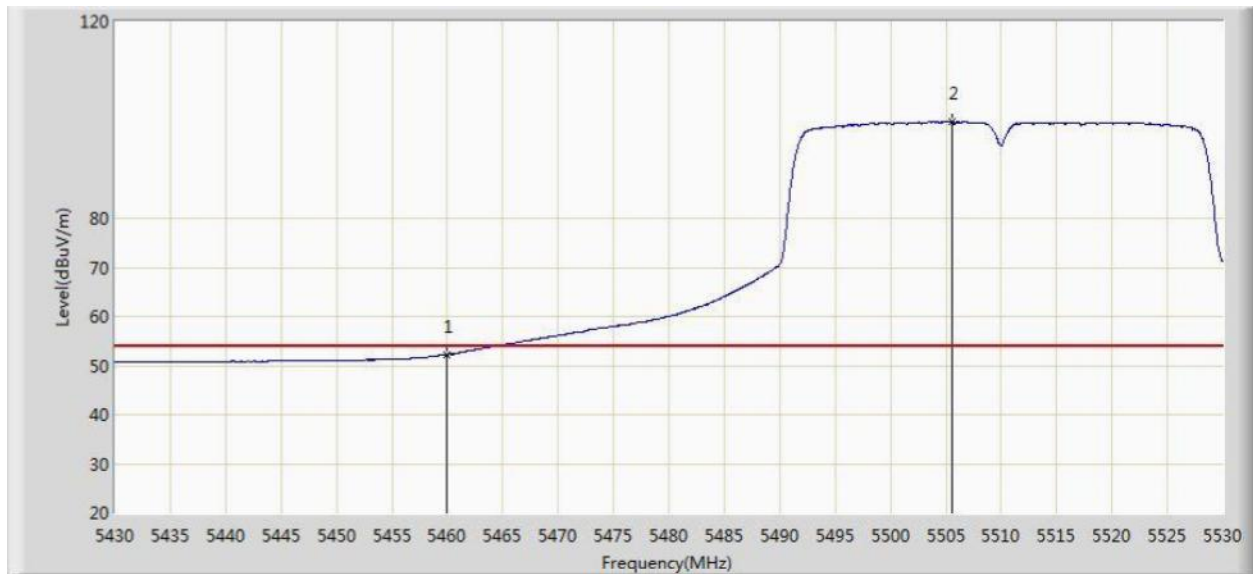


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5460.000	52.308	14.745	-1.692	54.000	37.563	AV
2		*	5505.600	99.662	62.032	N/A	N/A	37.630	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2015/01/02 - 11:41
Limit: FCC_Part15.209_RE(3m)	Engineer: Roy Cheng
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Wireless LAN Access Point	Power: AC 120V/60Hz
Test Mode: Transmit at channel 5510MHz by 802.11ac-VHT40 Ant 1	

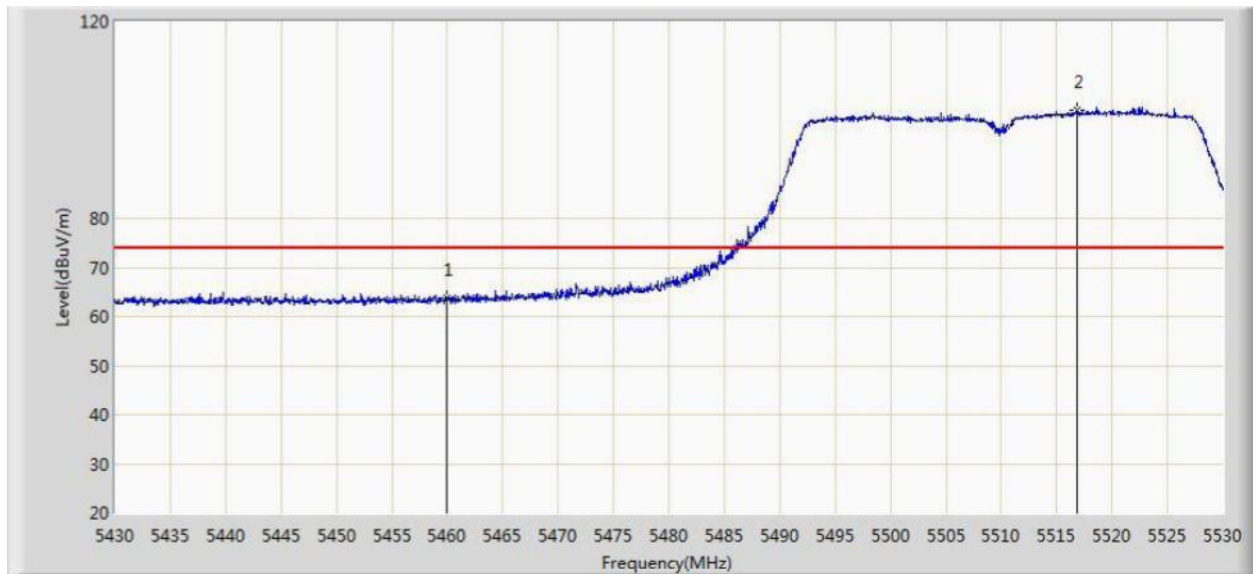


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5460.000	63.698	26.135	-10.302	74.000	37.563	PK
2		*	5516.850	102.156	64.513	N/A	N/A	37.643	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2015/01/02 - 11:42
Limit: FCC_Part15.209_RE(3m)	Engineer: Roy Cheng
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Wireless LAN Access Point	Power: AC 120V/60Hz
Test Mode: Transmit at channel 5510MHz by 802.11ac-VHT40 Ant 1	

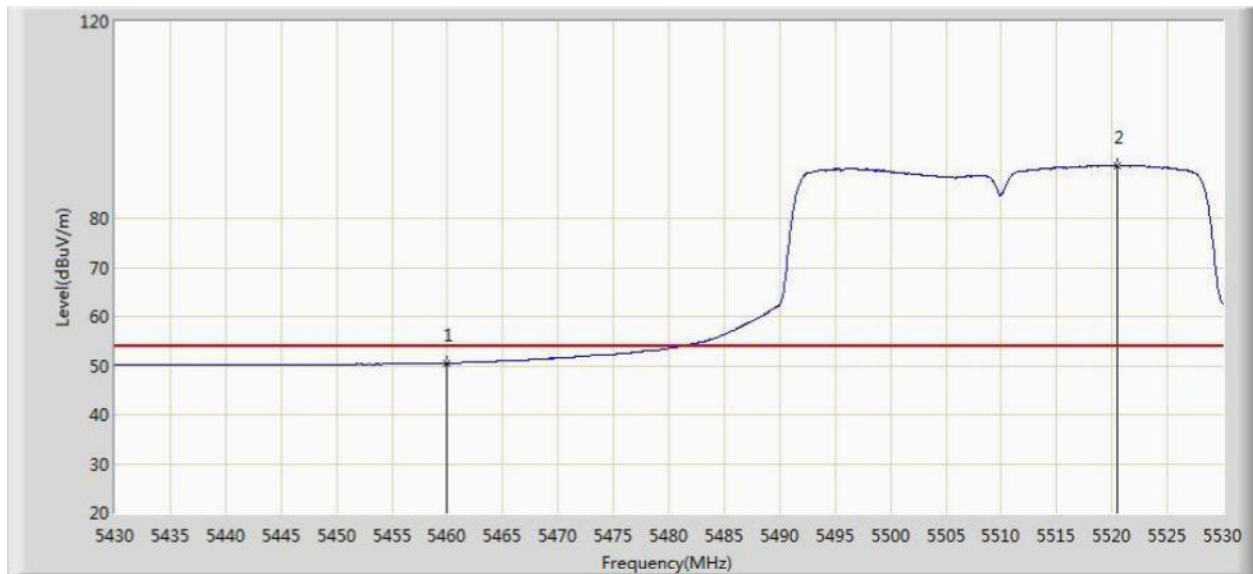


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5460.000	50.468	12.905	-3.532	54.000	37.563	AV
2		*	5520.500	90.687	53.040	N/A	N/A	37.648	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2015/01/02 - 11:43
Limit: FCC_Part15.209_RE(3m)	Engineer: Roy Cheng
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Wireless LAN Access Point	Power: AC 120V/60Hz
Test Mode: Transmit at channel 5670MHz by 802.11ac-VHT40 Ant 1	

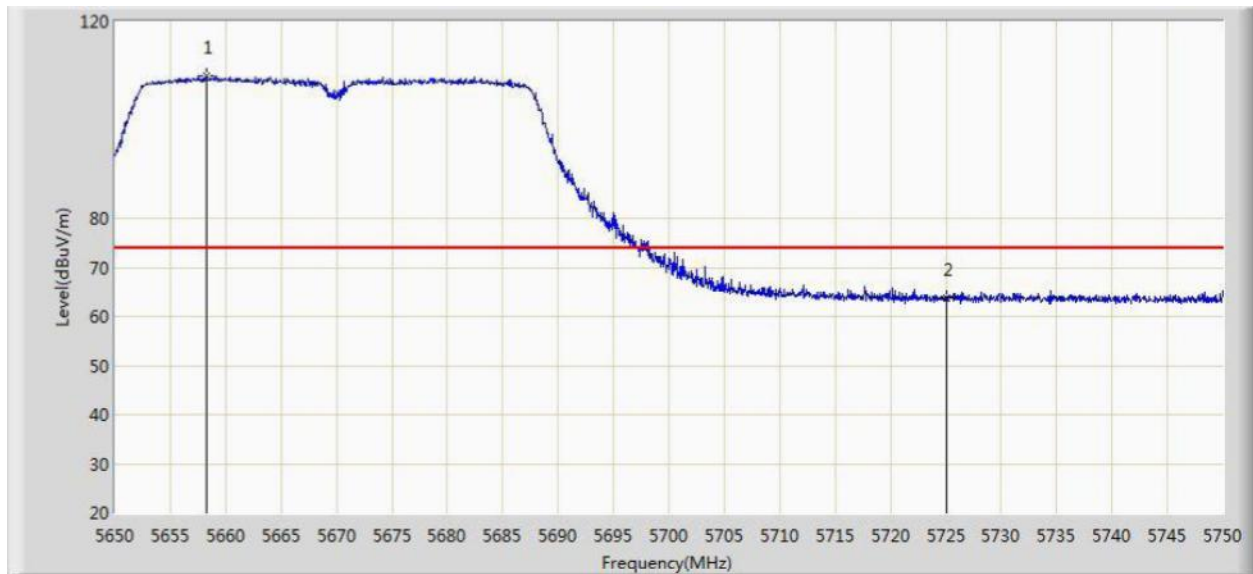


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5658.250	109.020	71.226	N/A	N/A	37.794	PK
2			5725.000	63.718	25.728	-10.282	74.000	37.990	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2015/01/02 - 11:44
Limit: FCC_Part15.209_RE(3m)	Engineer: Roy Cheng
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Wireless LAN Access Point	Power: AC 120V/60Hz
Test Mode: Transmit at channel 5670MHz by 802.11ac-VHT40 Ant 1	

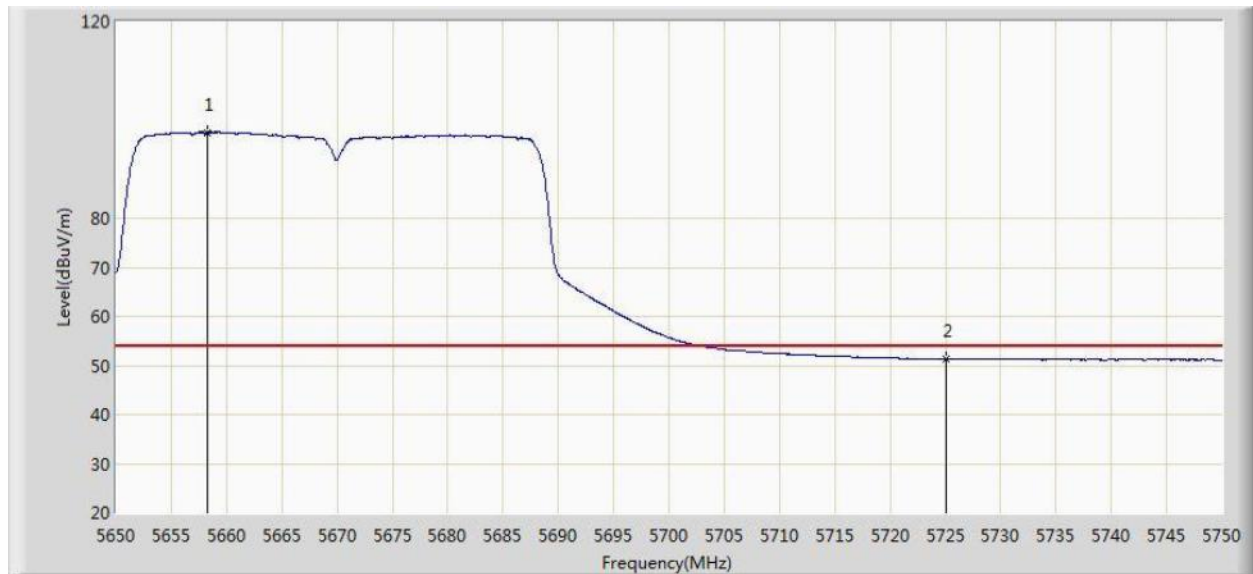


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5658.250	97.485	59.691	N/A	N/A	37.794	AV
2			5725.000	51.297	13.307	-2.703	54.000	37.990	AV

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2015/01/02 - 11:45
Limit: FCC_Part15.209_RE(3m)	Engineer: Roy Cheng
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Wireless LAN Access Point	Power: AC 120V/60Hz
Test Mode: Transmit at channel 5670MHz by 802.11ac-VHT40 Ant 1	

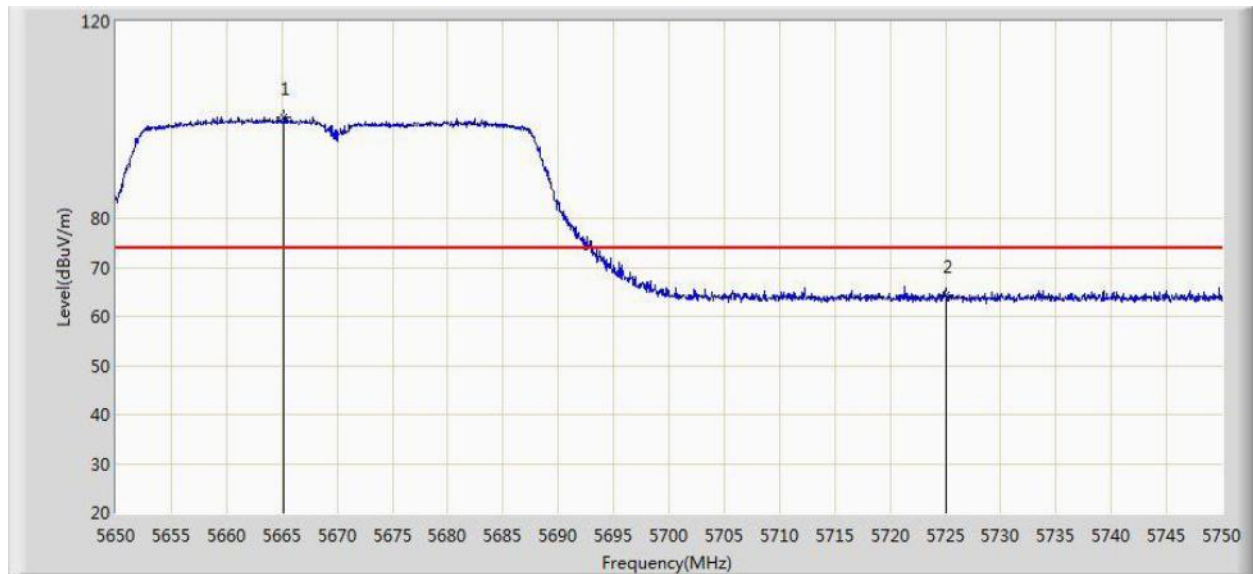


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5665.200	100.564	62.761	N/A	N/A	37.803	PK
2			5725.000	64.451	26.461	-9.549	74.000	37.990	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2015/01/02 - 11:48
Limit: FCC_Part15.209_RE(3m)	Engineer: Roy Cheng
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Wireless LAN Access Point	Power: AC 120V/60Hz
Test Mode: Transmit at channel 5670MHz by 802.11ac-VHT40 Ant 1	

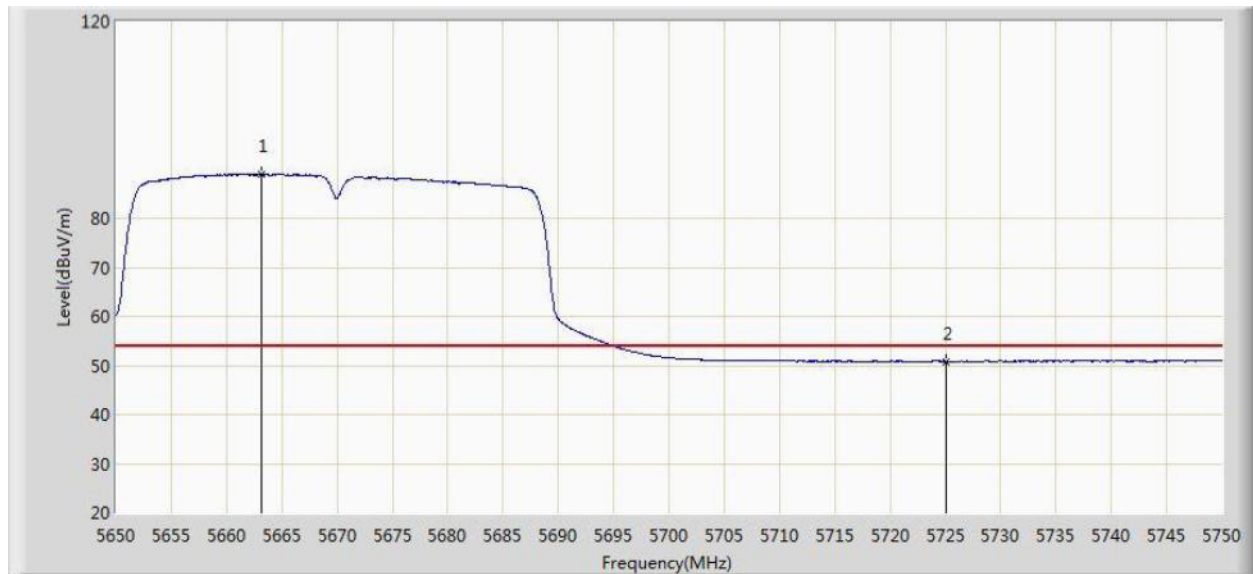


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5663.150	88.897	51.096	N/A	N/A	37.800	AV
2			5725.000	50.831	12.841	-3.169	54.000	37.990	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2015/01/02 - 11:49
Limit: FCC_Part15.209_RE(3m)	Engineer: Roy Cheng
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Wireless LAN Access Point	Power: AC 120V/60Hz
Test Mode: Transmit at channel 5755MHz by 802.11ac-VHT40 Ant 1	

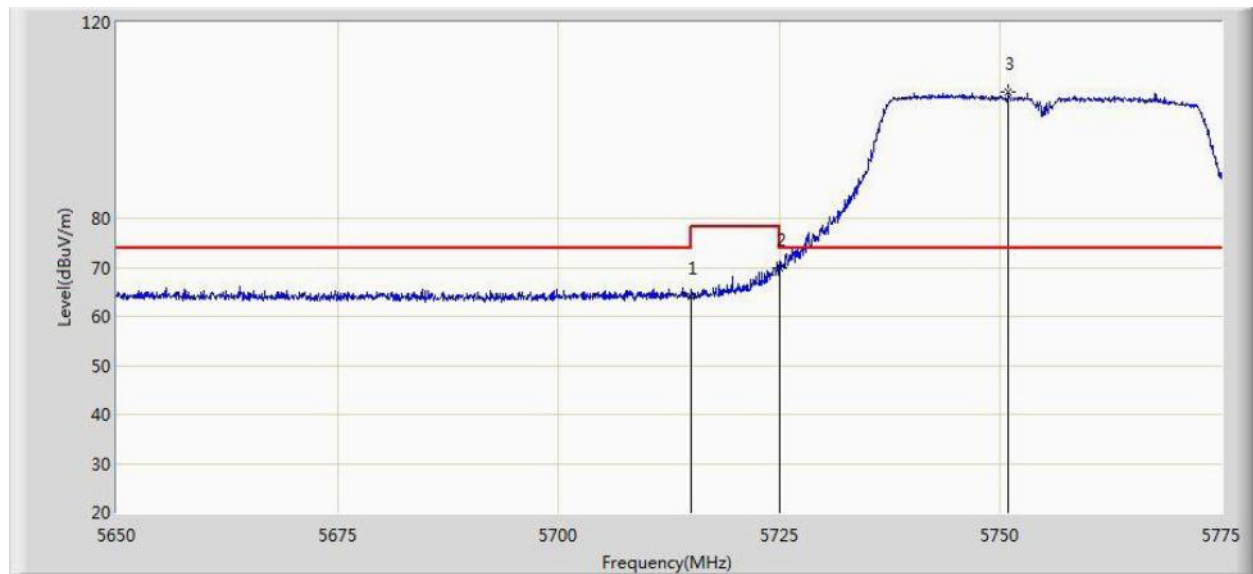


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5715.000	63.988	26.039	-10.012	74.000	37.949	PK
2			5725.000	69.719	31.729	-8.481	78.200	37.990	PK
3		*	5750.937	105.926	67.826	N/A	N/A	38.101	PK

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2015/01/02 - 11:51
Limit: FCC_Part15.209_RE(3m)	Engineer: Roy Cheng
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Wireless LAN Access Point	Power: AC 120V/60Hz
Test Mode: Transmit at channel 5755MHz by 802.11ac-VHT40 Ant 1	

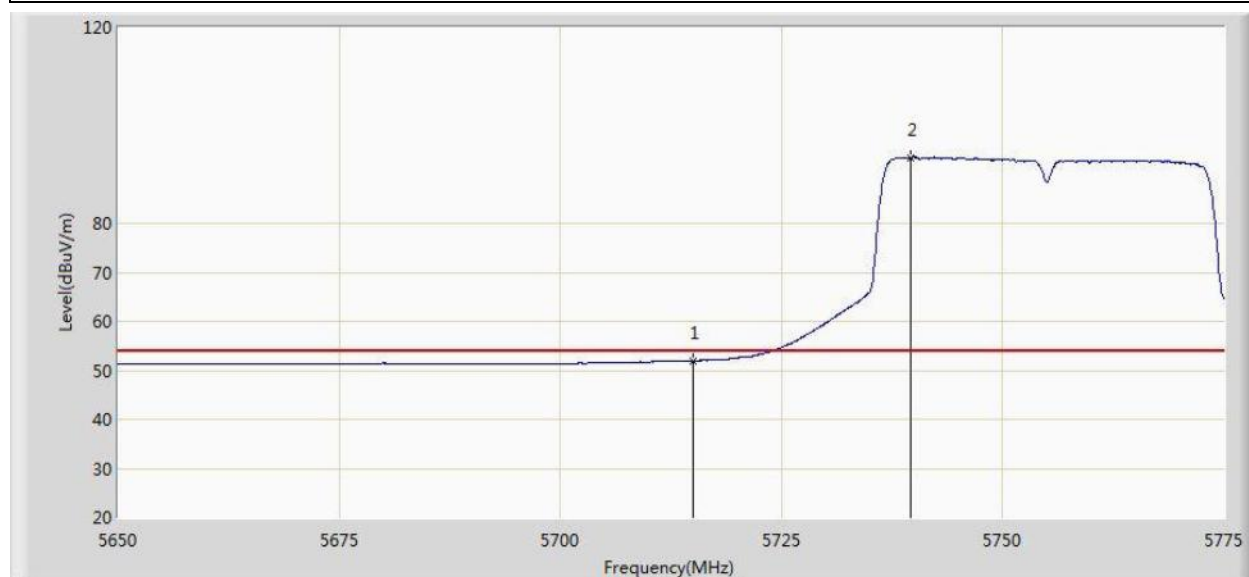


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5715.000	51.969	14.020	-2.031	54.000	37.949	AV
2		*	5739.562	93.454	55.405	N/A	N/A	38.049	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2015/01/02 - 11:51
Limit: FCC_Part15.209_RE(3m)	Engineer: Roy Cheng
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Wireless LAN Access Point	Power: AC 120V/60Hz
Test Mode: Transmit at channel 5755MHz by 802.11ac-VHT40 Ant 1	

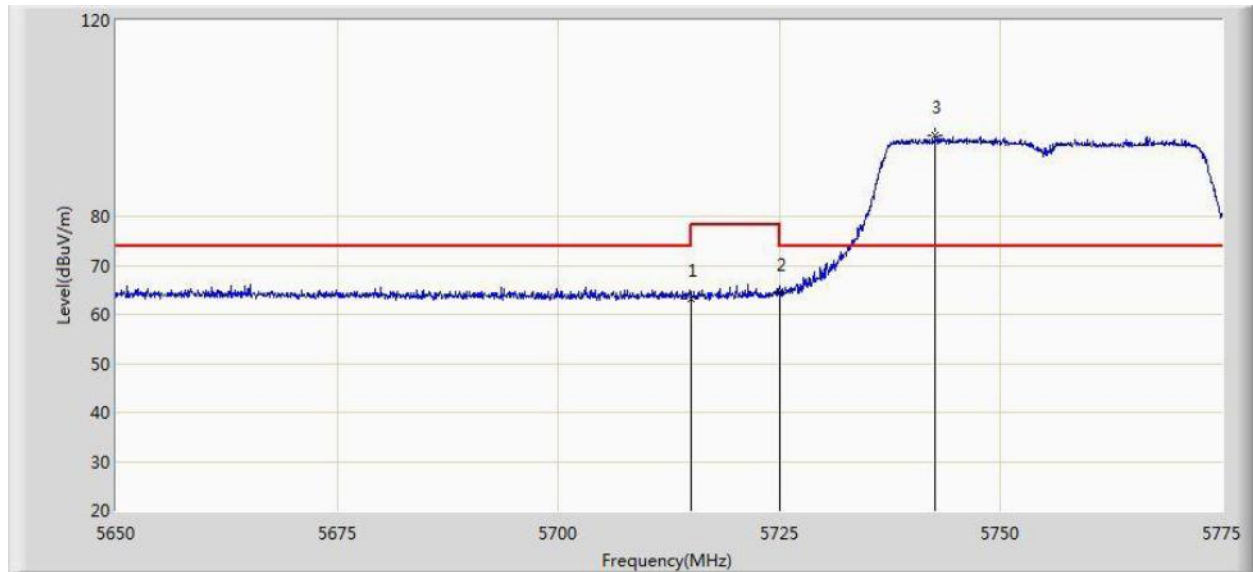


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5715.000	63.248	25.299	-10.752	74.000	37.949	PK
2			5725.000	64.253	26.263	-13.947	78.200	37.990	PK
3		*	5742.562	96.640	58.579	N/A	N/A	38.061	PK

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2015/01/02 - 11:53
Limit: FCC_Part15.209_RE(3m)	Engineer: Roy Cheng
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Wireless LAN Access Point	Power: AC 120V/60Hz
Test Mode: Transmit at channel 5755MHz by 802.11ac-VHT40 Ant 1	

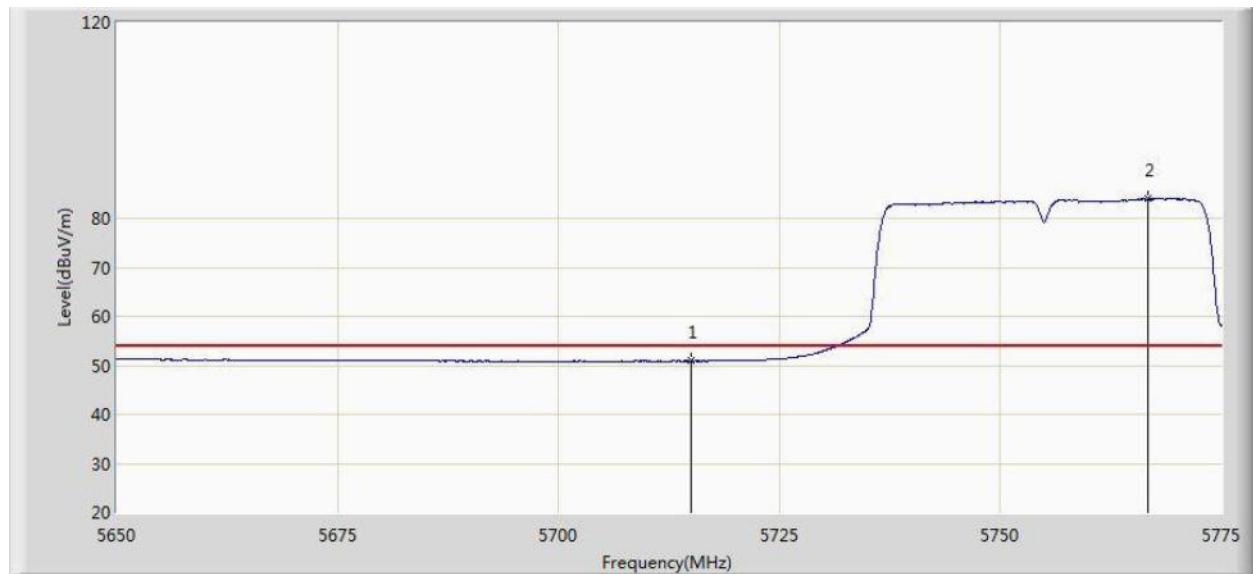


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5715.000	50.888	12.939	-3.112	54.000	37.949	AV
2		*	5766.750	83.953	45.795	N/A	N/A	38.158	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2015/01/02 - 11:54
Limit: FCC_Part15.209_RE(3m)	Engineer: Roy Cheng
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Wireless LAN Access Point	Power: AC 120V/60Hz
Test Mode: Transmit at channel 5795MHz by 802.11ac-VHT40 Ant 1	

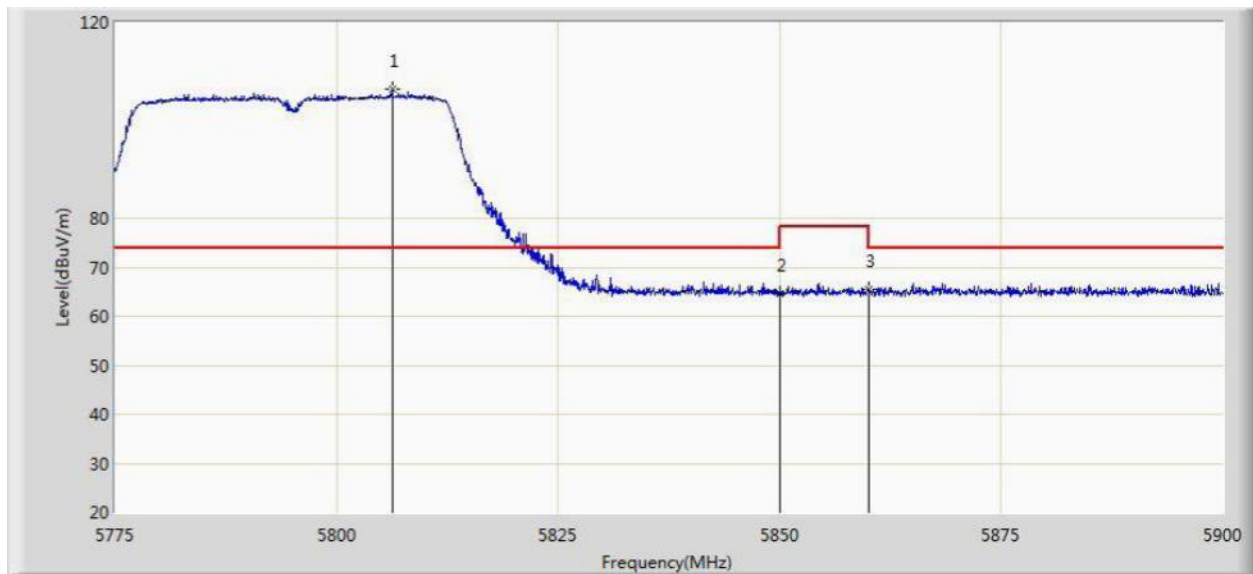


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5806.250	106.322	68.039	N/A	N/A	38.283	PK
2			5850.000	64.722	26.269	-13.478	78.200	38.454	PK
3			5860.000	65.524	27.046	-8.476	74.000	38.478	PK

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2015/01/02 - 11:56
Limit: FCC_Part15.209_RE(3m)	Engineer: Roy Cheng
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Wireless LAN Access Point	Power: AC 120V/60Hz
Test Mode: Transmit at channel 5795MHz by 802.11ac-VHT40 Ant 1	

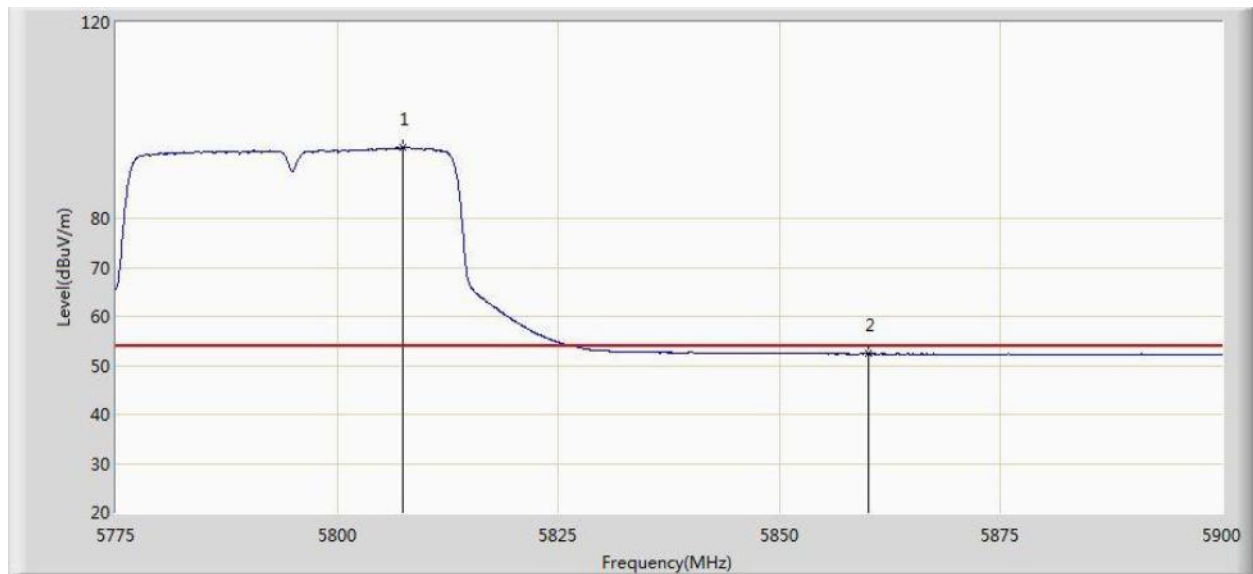


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5807.375	94.408	56.122	N/A	N/A	38.286	AV
2			5860.000	52.340	13.862	-1.660	54.000	38.478	AV

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2015/01/02 - 11:56
Limit: FCC_Part15.209_RE(3m)	Engineer: Roy Cheng
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Wireless LAN Access Point	Power: AC 120V/60Hz
Test Mode: Transmit at channel 5795MHz by 802.11ac-VHT40 Ant 1	

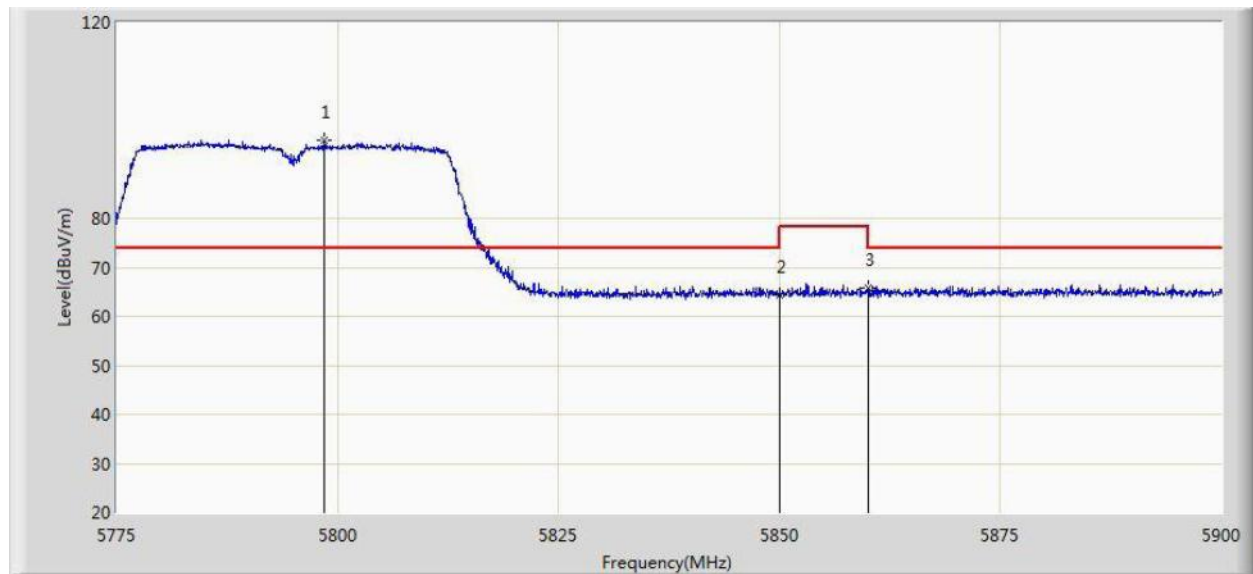


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5798.562	96.057	57.797	N/A	N/A	38.259	PK
2			5850.000	64.282	25.829	-13.918	78.200	38.454	PK
3			5860.000	65.836	27.358	-8.164	74.000	38.478	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2015/01/02 - 11:58
Limit: FCC_Part15.209_RE(3m)	Engineer: Roy Cheng
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Wireless LAN Access Point	Power: AC 120V/60Hz
Test Mode: Transmit at channel 5795MHz by 802.11ac-VHT40 Ant 1	

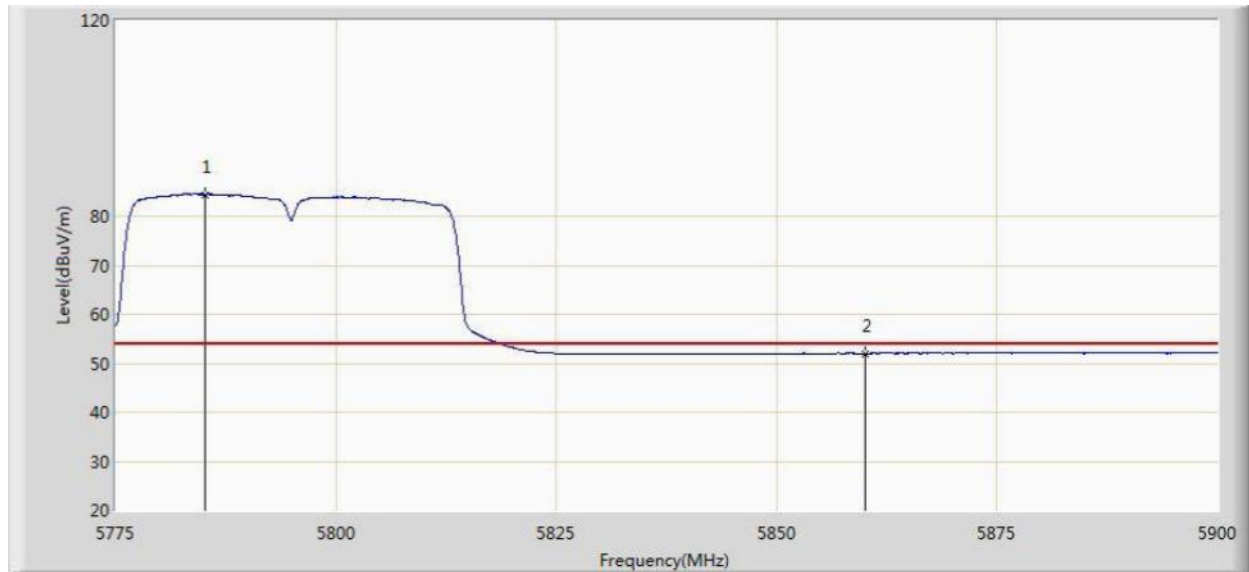


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5785.125	84.477	46.264	N/A	N/A	38.213	AV
2			5860.000	52.021	13.543	-1.979	54.000	38.478	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2015/01/02 - 12:05
Limit: FCC_Part15.209_RE(3m)	Engineer: Roy Cheng
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Wireless LAN Access Point	Power: AC 120V/60Hz
Test Mode: Transmit at channel 5210MHz by 802.11ac-VHT80 Ant 1	

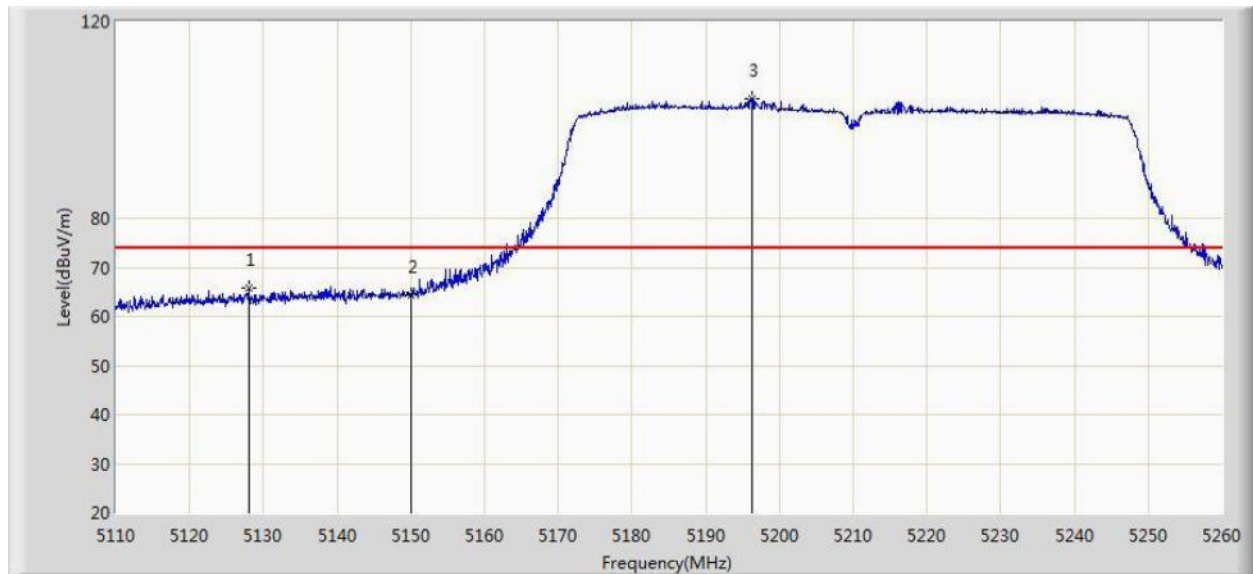


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5128.000	65.907	28.429	-8.093	74.000	37.479	PK
2			5150.000	64.478	27.026	-9.522	74.000	37.452	PK
3		*	5196.325	104.424	67.090	N/A	N/A	37.334	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2015/01/02 - 12:02
Limit: FCC_Part15.209_RE(3m)	Engineer: Roy Cheng
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Wireless LAN Access Point	Power: AC 120V/60Hz
Test Mode: Transmit at channel 5210MHz by 802.11ac-VHT80 Ant 1	

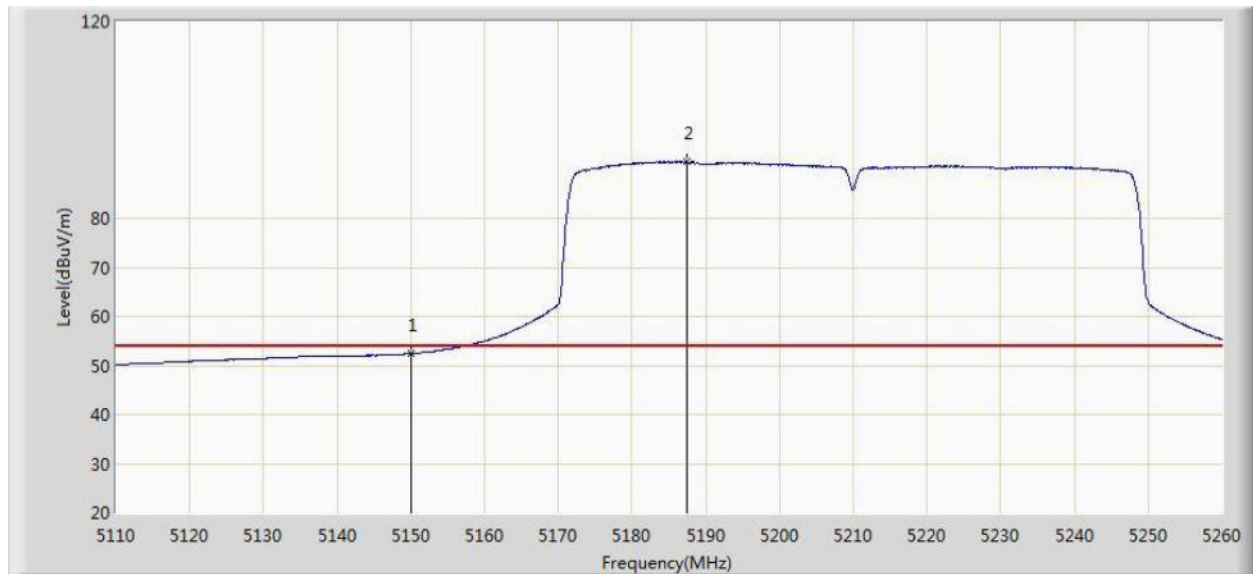


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5150.000	52.434	14.982	-1.566	54.000	37.452	AV
2		*	5187.400	91.454	54.099	N/A	N/A	37.356	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2015/01/02 - 12:05
Limit: FCC_Part15.209_RE(3m)	Engineer: Roy Cheng
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Wireless LAN Access Point	Power: AC 120V/60Hz
Test Mode: Transmit at channel 5210MHz by 802.11ac-VHT80 Ant 1	

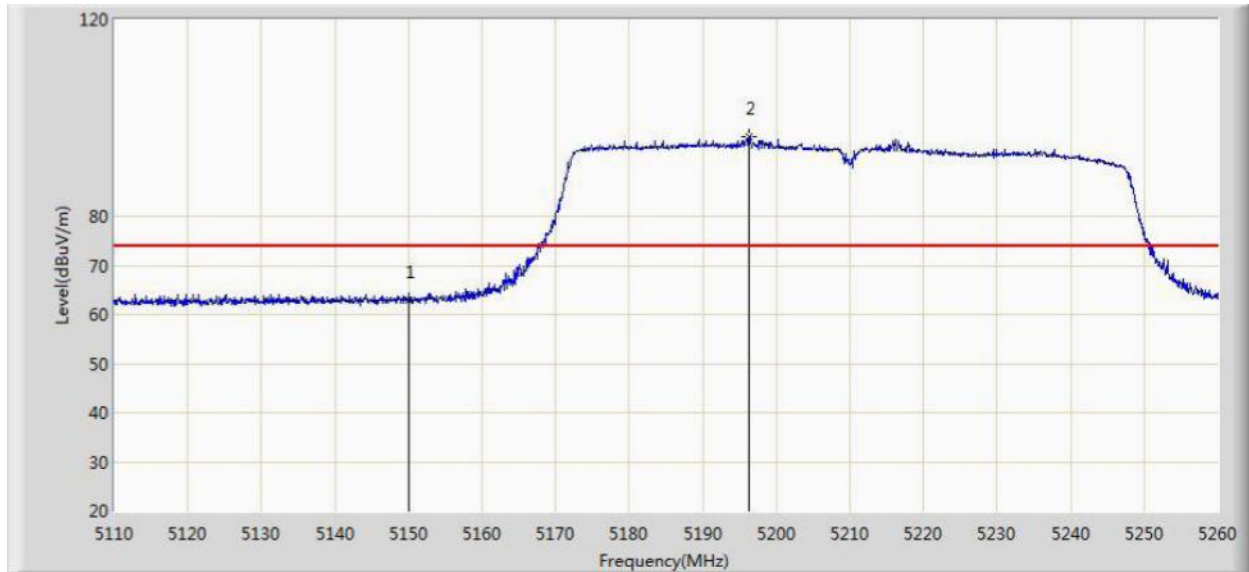


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5150.000	62.935	25.483	-11.065	74.000	37.452	PK
2		*	5196.250	96.209	58.875	N/A	N/A	37.335	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2015/01/02 - 12:06
Limit: FCC_Part15.209_RE(3m)	Engineer: Roy Cheng
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Wireless LAN Access Point	Power: AC 120V/60Hz
Test Mode: Transmit at channel 5210MHz by 802.11ac-VHT80 Ant 1	

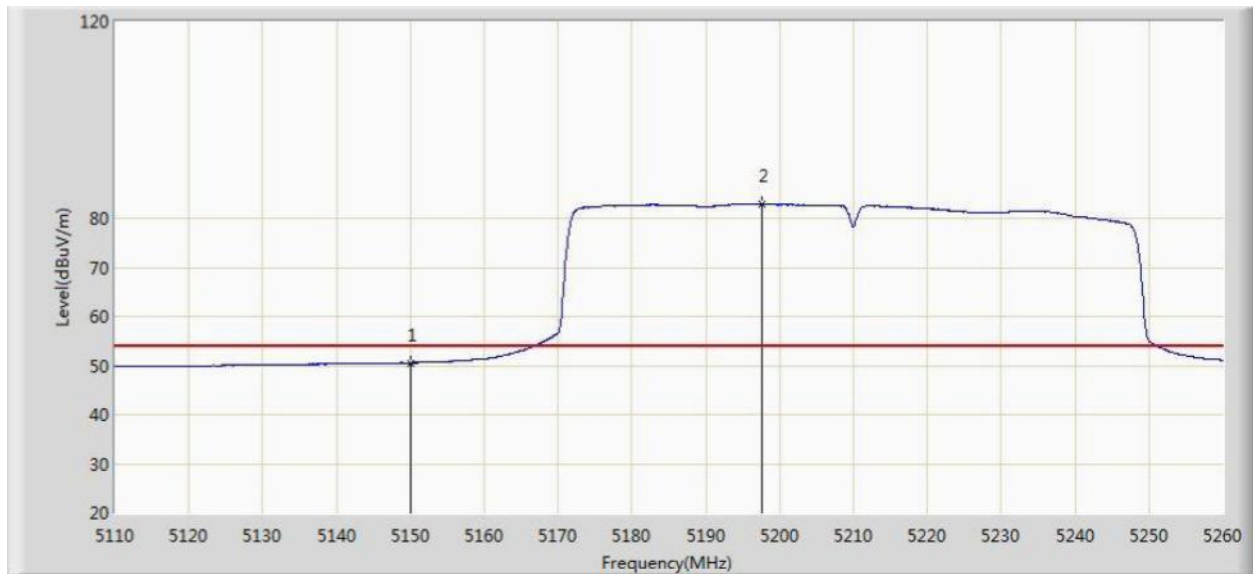


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5150.000	50.567	13.115	-3.433	54.000	37.452	AV
2		*	5197.525	82.891	45.560	N/A	N/A	37.331	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2015/01/02 - 12:10
Limit: FCC_Part15.209_RE(3m)	Engineer: Roy Cheng
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Wireless LAN Access Point	Power: AC 120V/60Hz
Test Mode: Transmit at channel 5290MHz by 802.11ac-VHT80 Ant 1	

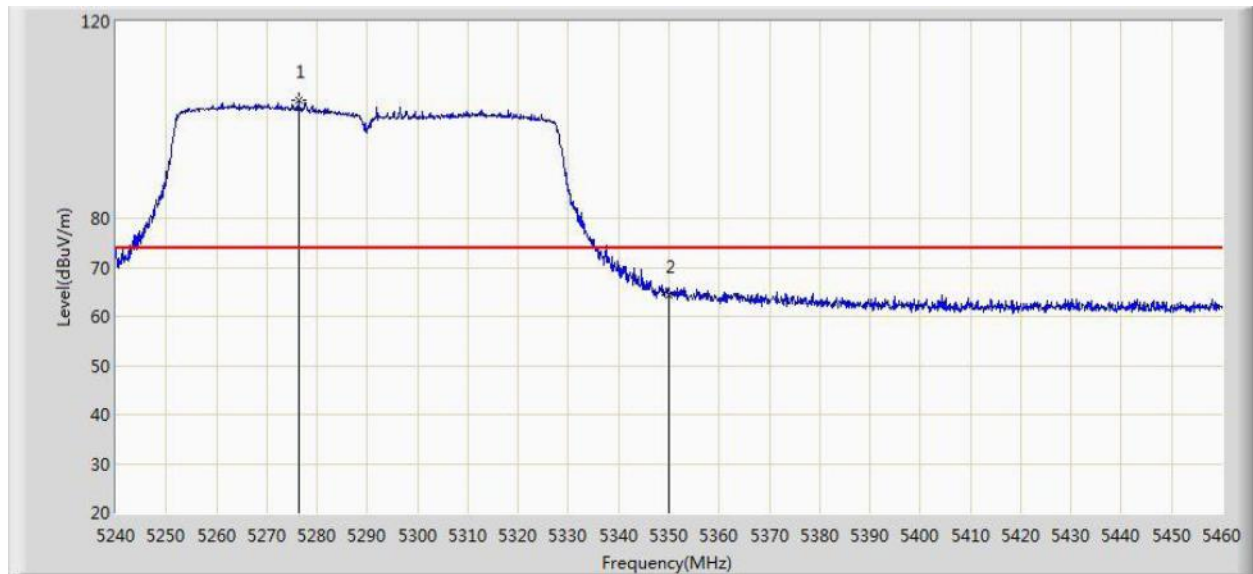


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5276.300	104.102	66.918	N/A	N/A	37.184	PK
2			5350.000	64.391	27.105	-9.609	74.000	37.286	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2015/01/02 - 12:09
Limit: FCC_Part15.209_RE(3m)	Engineer: Roy Cheng
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Wireless LAN Access Point	Power: AC 120V/60Hz
Test Mode: Transmit at channel 5290MHz by 802.11ac-VHT80 Ant 1	

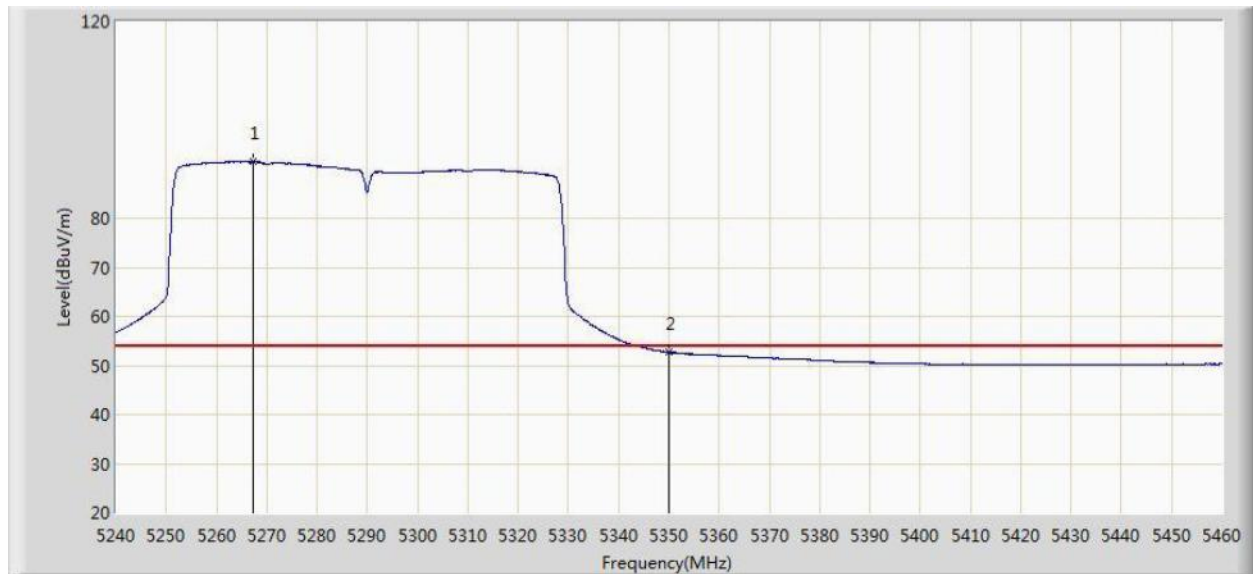


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5267.280	91.522	54.336	N/A	N/A	37.185	AV
2			5350.000	52.673	15.387	-1.327	54.000	37.286	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2015/01/02 - 12:10
Limit: FCC_Part15.209_RE(3m)	Engineer: Roy Cheng
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Wireless LAN Access Point	Power: AC 120V/60Hz
Test Mode: Transmit at channel 5290MHz by 802.11ac-VHT80 Ant 1	

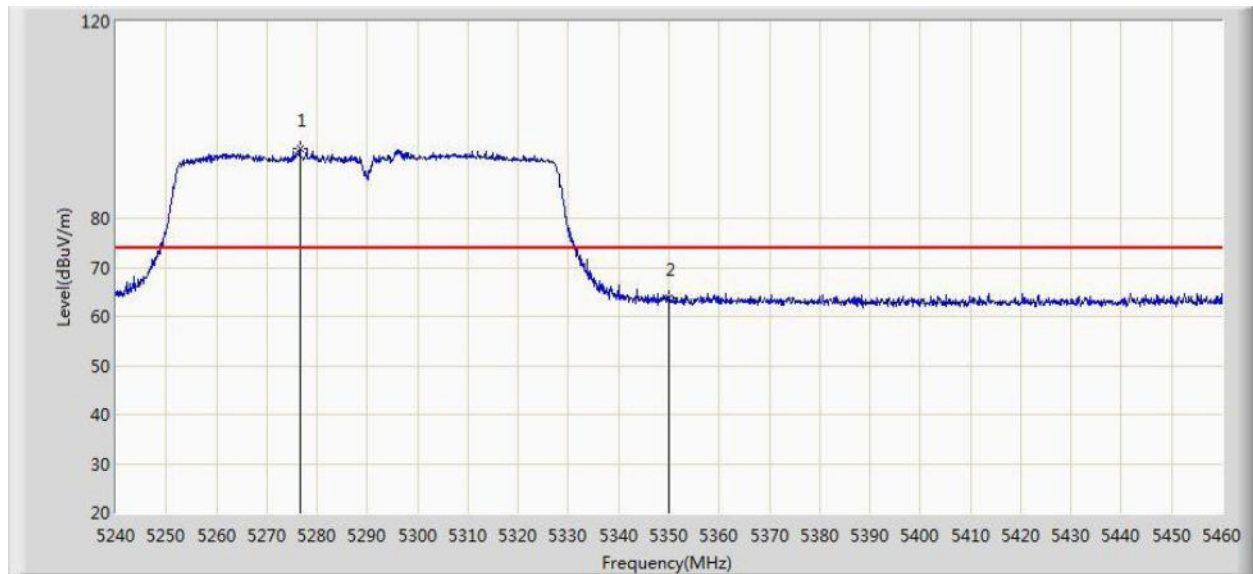


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5276.630	94.106	56.922	N/A	N/A	37.184	PK
2			5350.000	63.852	26.566	-10.148	74.000	37.286	PK

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2015/01/02 - 12:12
Limit: FCC_Part15.209_RE(3m)	Engineer: Roy Cheng
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Wireless LAN Access Point	Power: AC 120V/60Hz
Test Mode: Transmit at channel 5290MHz by 802.11ac-VHT80 Ant 1	

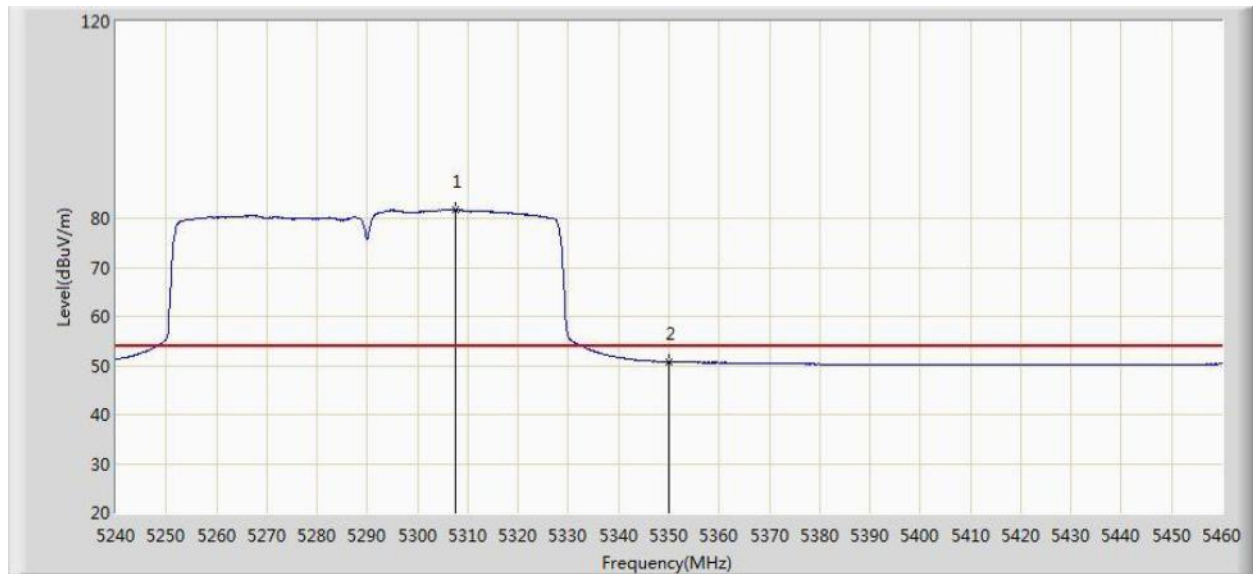


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5307.650	81.708	44.513	N/A	N/A	37.195	AV
2			5350.000	50.738	13.452	-3.262	54.000	37.286	AV

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2015/01/02 - 12:17
Limit: FCC_Part15.209_RE(3m)	Engineer: Roy Cheng
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Wireless LAN Access Point	Power: AC 120V/60Hz
Test Mode: Transmit at channel 5530MHz by 802.11ac-VHT80 Ant 1	

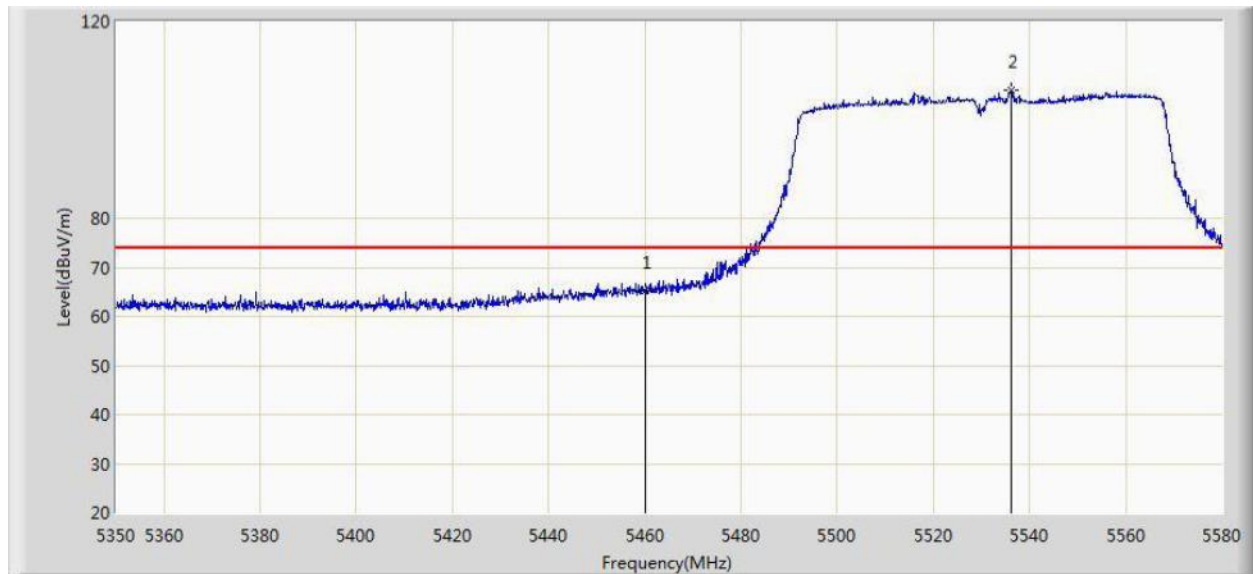


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5460.000	65.246	27.683	-8.754	74.000	37.563	PK
2		*	5536.185	105.980	68.302	N/A	N/A	37.678	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2015/01/02 - 12:16
Limit: FCC_Part15.209_RE(3m)	Engineer: Roy Cheng
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Wireless LAN Access Point	Power: AC 120V/60Hz
Test Mode: Transmit at channel 5530MHz by 802.11ac-VHT80 Ant 1	

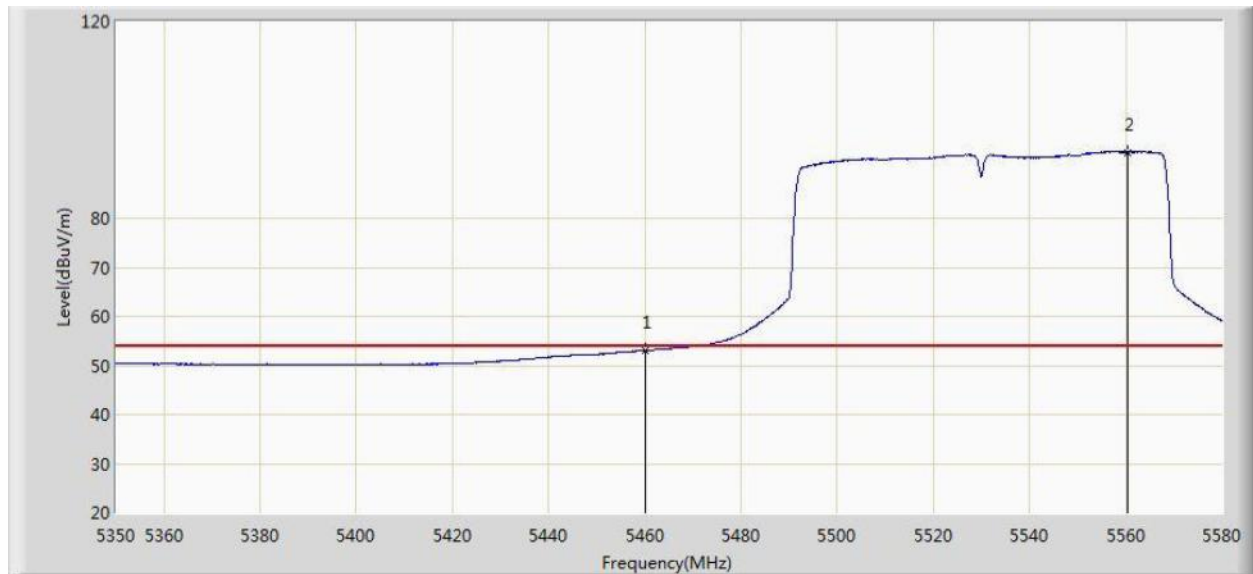


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5460.000	53.093	15.530	-0.907	54.000	37.563	AV
2		*	5560.335	93.456	55.749	N/A	N/A	37.707	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2015/01/02 - 12:17
Limit: FCC_Part15.209_RE(3m)	Engineer: Roy Cheng
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Wireless LAN Access Point	Power: AC 120V/60Hz
Test Mode: Transmit at channel 5530MHz by 802.11ac-VHT80 Ant 1	

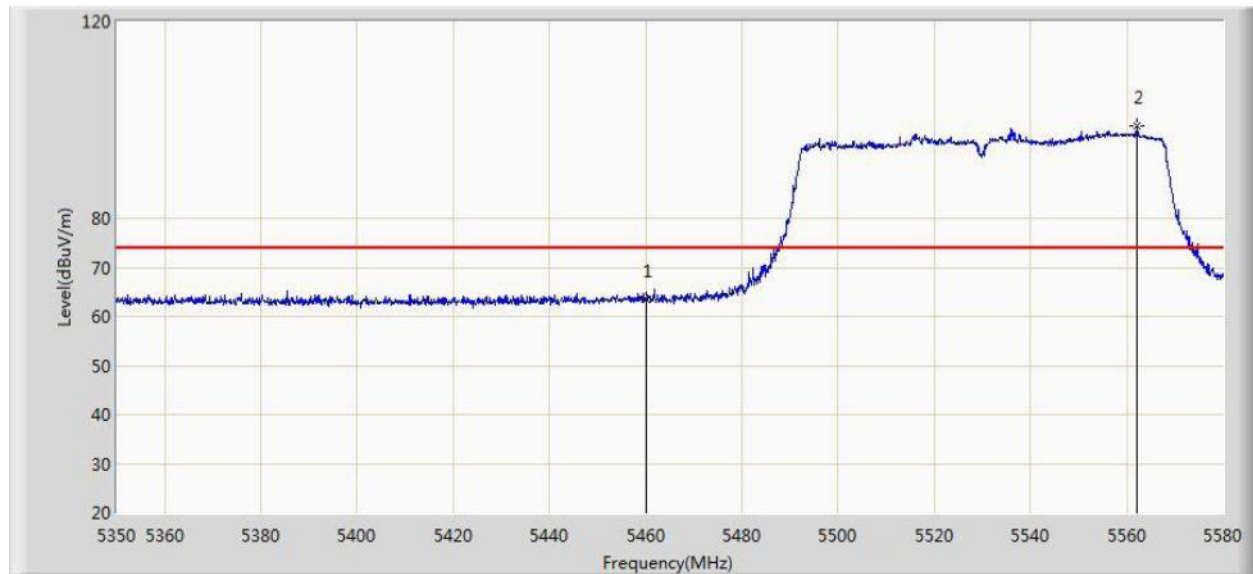


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5460.000	63.415	25.852	-10.585	74.000	37.563	PK
2		*	5562.060	98.766	61.059	N/A	N/A	37.707	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2015/01/02 - 12:19
Limit: FCC_Part15.209_RE(3m)	Engineer: Roy Cheng
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Wireless LAN Access Point	Power: AC 120V/60Hz
Test Mode: Transmit at channel 5530MHz by 802.11ac-VHT80 Ant 1	

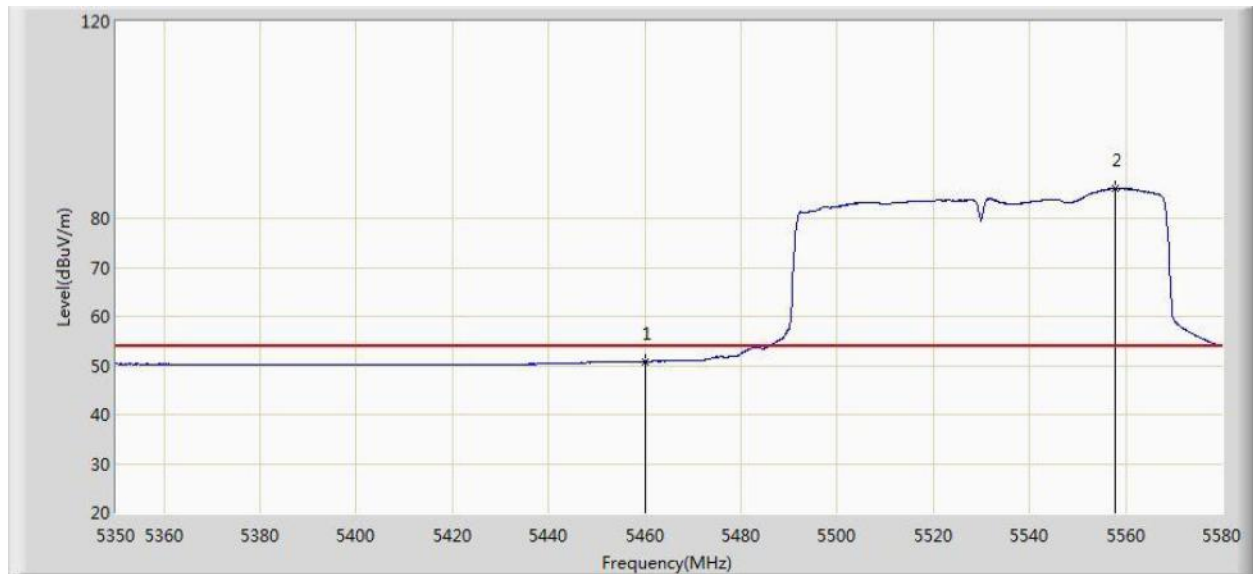


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5460.000	50.864	13.301	-3.136	54.000	37.563	AV
2		*	5557.805	85.999	48.293	N/A	N/A	37.706	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2015/01/02 - 12:21
Limit: FCC_Part15.209_RE(3m)	Engineer: Roy Cheng
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Wireless LAN Access Point	Power: AC 120V/60Hz
Test Mode: Transmit at channel 5775MHz by 802.11ac-VHT80 Ant 1	

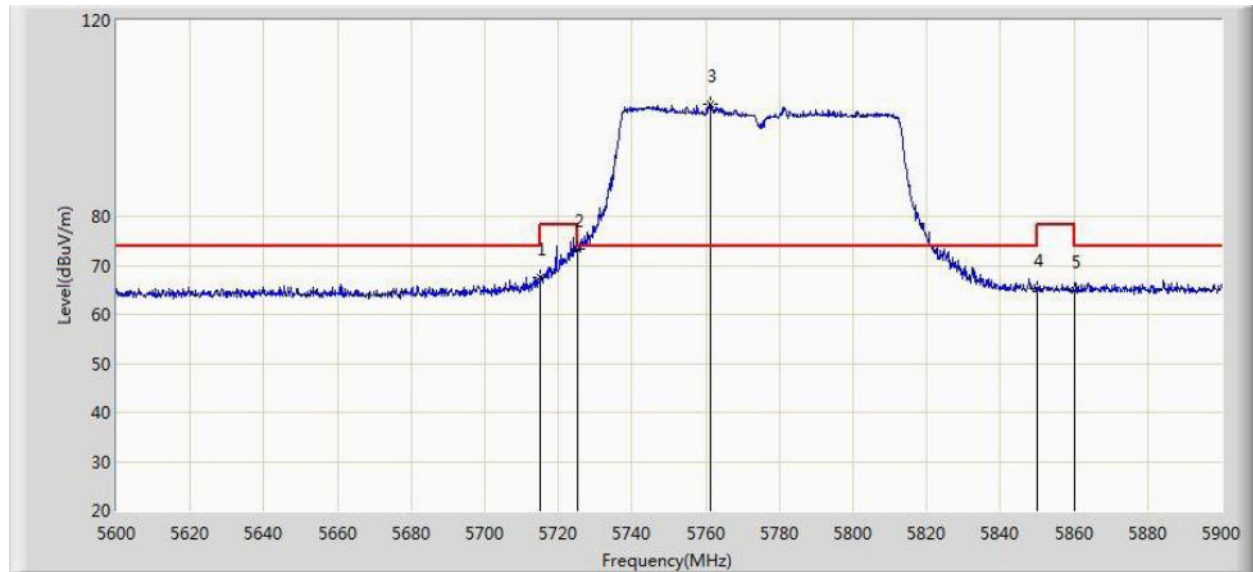


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5715.000	67.409	29.460	-6.591	74.000	37.949	PK
2			5725.000	73.441	35.451	-4.759	78.200	37.990	PK
3		*	5761.250	102.890	64.746	N/A	N/A	38.145	PK
4			5850.000	65.241	26.788	-12.959	78.200	38.454	PK
5			5860.000	64.886	26.408	-9.114	74.000	38.478	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2015/01/02 - 12:23
Limit: FCC_Part15.209_RE(3m)	Engineer: Roy Cheng
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Wireless LAN Access Point	Power: AC 120V/60Hz
Test Mode: Transmit at channel 5775MHz by 802.11ac-VHT80 Ant 1	

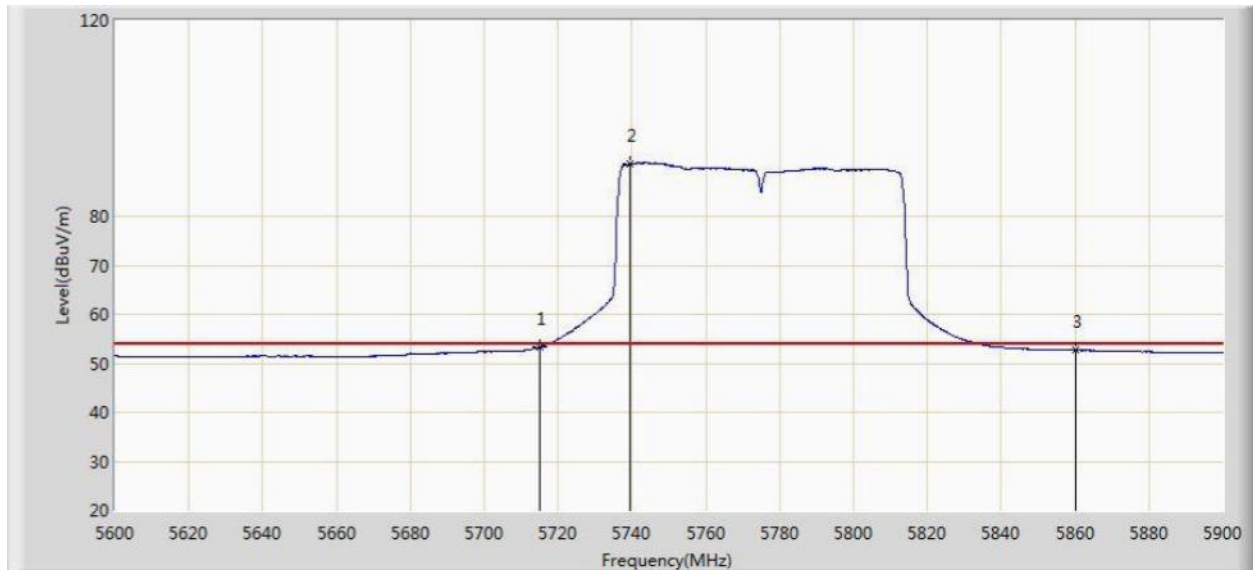


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5715.000	53.245	15.296	-0.755	54.000	37.949	AV
2		*	5739.350	90.665	52.616	N/A	N/A	38.049	AV
3			5860.000	52.677	14.199	-1.323	54.000	38.478	AV

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2015/01/02 - 12:24
Limit: FCC_Part15.209_RE(3m)	Engineer: Roy Cheng
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Wireless LAN Access Point	Power: AC 120V/60Hz
Test Mode: Transmit at channel 5775MHz by 802.11ac-VHT80 Ant 1	

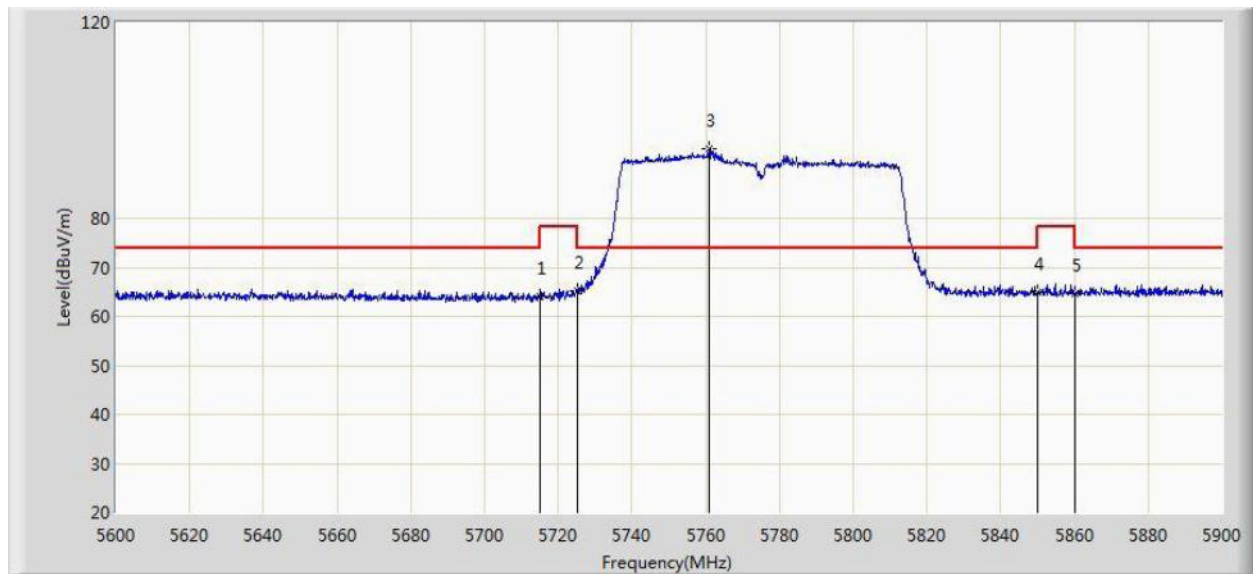


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5715.000	63.961	26.012	-10.039	74.000	37.949	PK
2			5725.000	65.283	27.293	-12.917	78.200	37.990	PK
3		*	5760.950	94.204	56.061	N/A	N/A	38.144	PK
4			5850.000	64.861	26.408	-13.339	78.200	38.454	PK
5			5860.000	64.634	26.156	-9.366	74.000	38.478	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2015/01/02 - 12:27
Limit: FCC_Part15.209_RE(3m)	Engineer: Roy Cheng
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Wireless LAN Access Point	Power: AC 120V/60Hz
Test Mode: Transmit at channel 5775MHz by 802.11ac-VHT80 Ant 1	

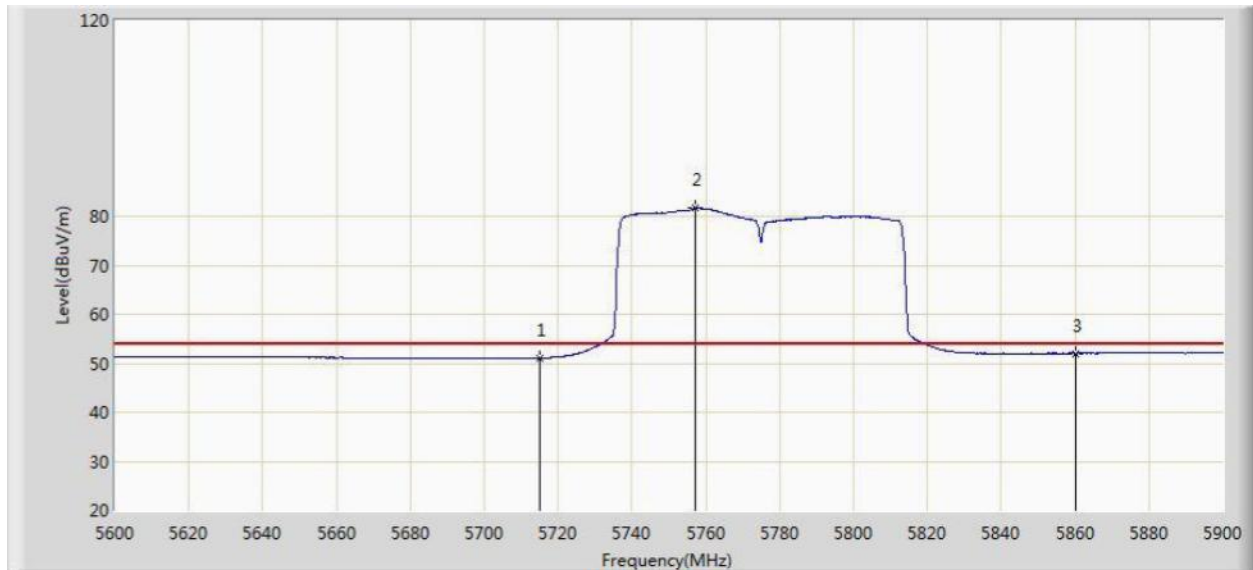


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5715.000	51.047	13.098	-2.953	54.000	37.949	AV
2		*	5757.200	81.678	43.548	N/A	N/A	38.129	AV
3			5860.000	52.009	13.531	-1.991	54.000	38.478	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2015/01/02 - 12:29
Limit: FCC_Part15.209_RE(3m)	Engineer: Roy Cheng
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Wireless LAN Access Point	Power: AC 120V/60Hz
Test Mode: Transmit at channel 5180MHz by 802.11a Ant 2	

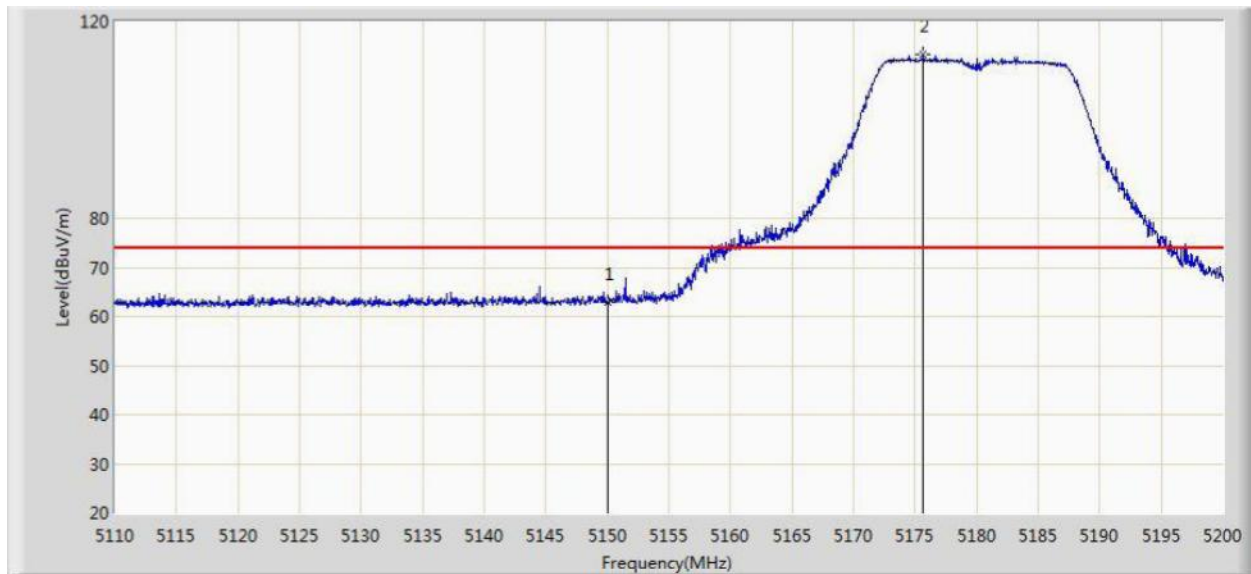


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5150.000	62.932	25.480	-11.068	74.000	37.452	PK
2		*	5175.655	113.449	76.065	N/A	N/A	37.384	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2015/01/02 - 12:31
Limit: FCC_Part15.209_RE(3m)	Engineer: Roy Cheng
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Wireless LAN Access Point	Power: AC 120V/60Hz
Test Mode: Transmit at channel 5180MHz by 802.11a Ant 2	

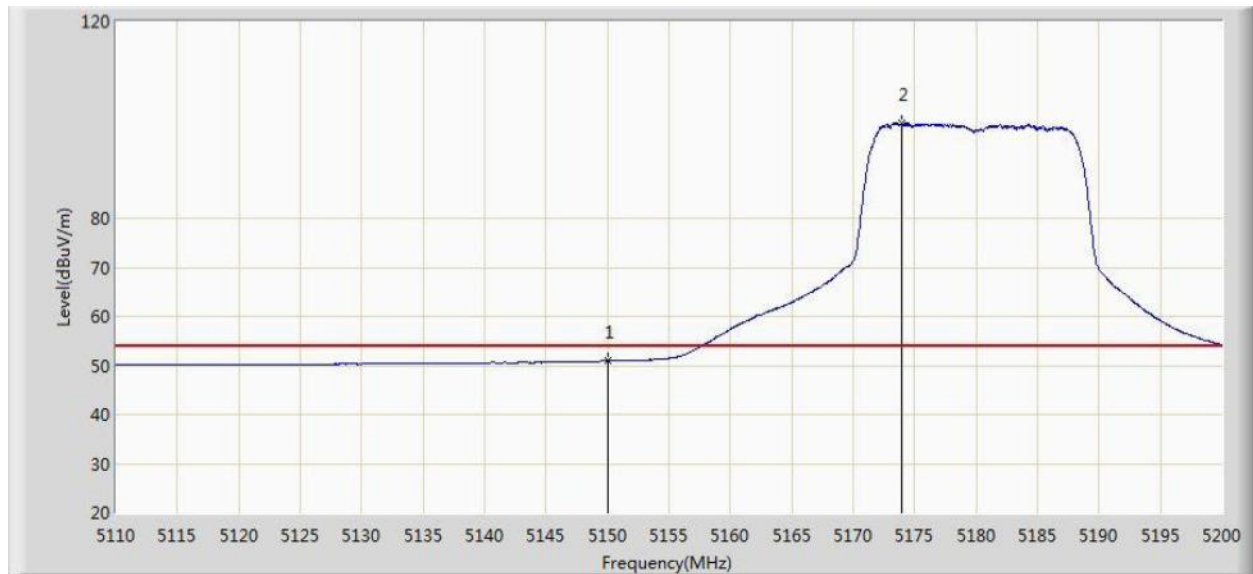


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5150.000	50.913	13.461	-3.087	54.000	37.452	AV
2		*	5173.945	99.398	62.011	N/A	N/A	37.388	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2015/01/02 - 12:32
Limit: FCC_Part15.209_RE(3m)	Engineer: Roy Cheng
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Wireless LAN Access Point	Power: AC 120V/60Hz
Test Mode: Transmit at channel 5180MHz by 802.11a Ant 2	

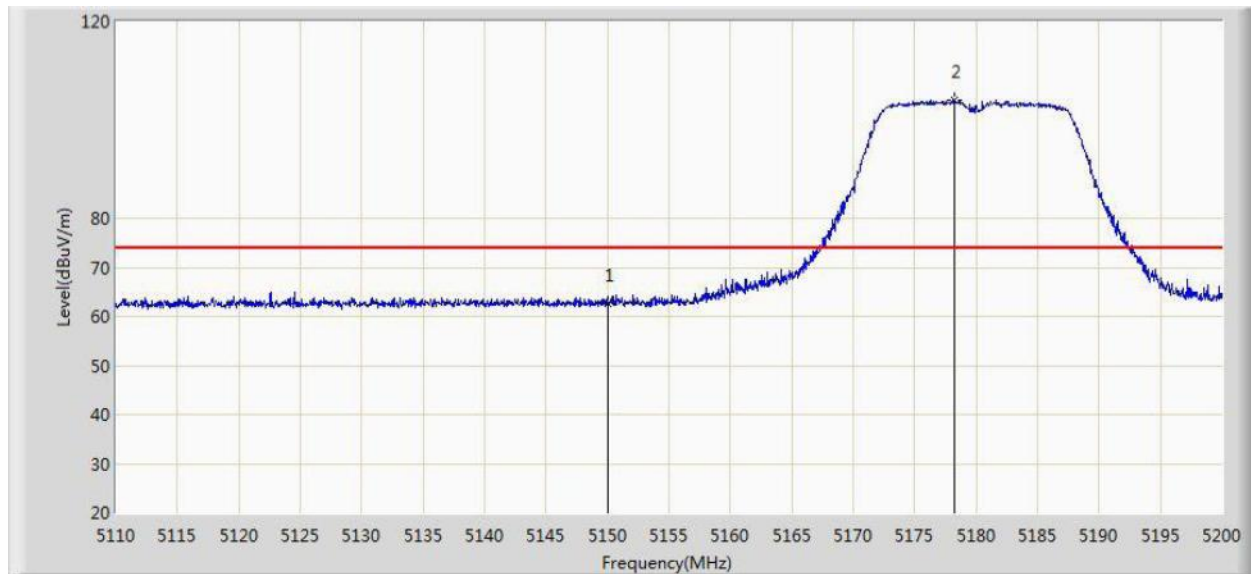


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5150.000	62.735	25.283	-11.265	74.000	37.452	PK
2		*	5178.265	104.148	66.770	N/A	N/A	37.378	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2015/01/02 - 12:35
Limit: FCC_Part15.209_RE(3m)	Engineer: Roy Cheng
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Wireless LAN Access Point	Power: AC 120V/60Hz
Test Mode: Transmit at channel 5180MHz by 802.11a Ant 2	

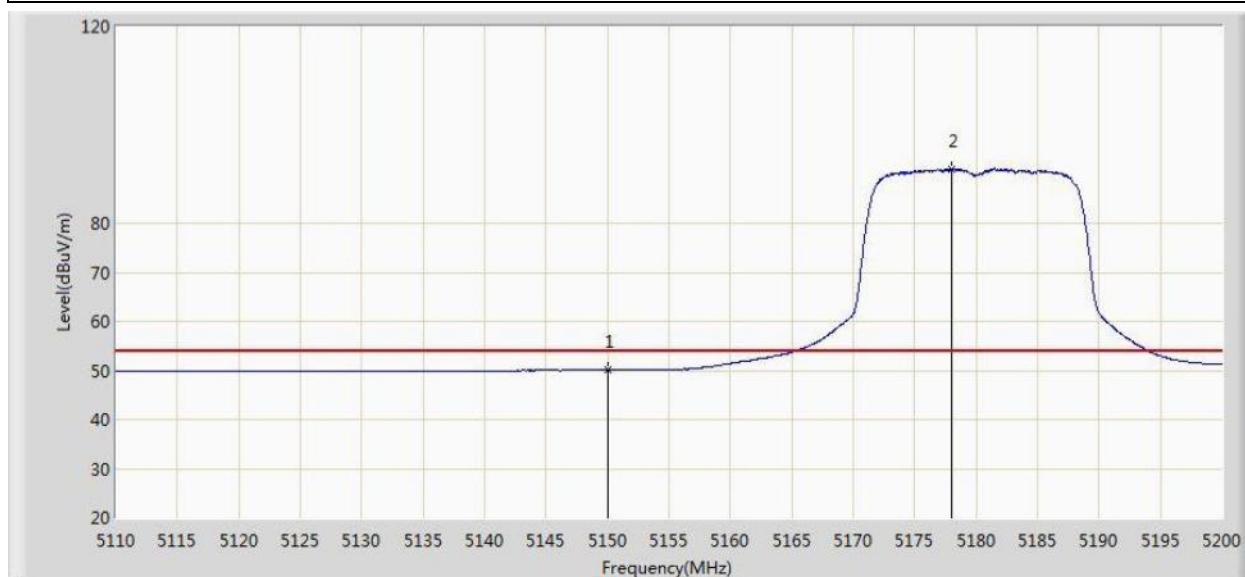


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5150.000	50.064	12.612	-3.936	54.000	37.452	AV
2		*	5177.995	90.983	53.605	N/A	N/A	37.378	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2015/01/02 - 12:36
Limit: FCC_Part15.209_RE(3m)	Engineer: Roy Cheng
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Wireless LAN Access Point	Power: AC 120V/60Hz
Test Mode: Transmit at channel 5320MHz by 802.11a Ant 2	

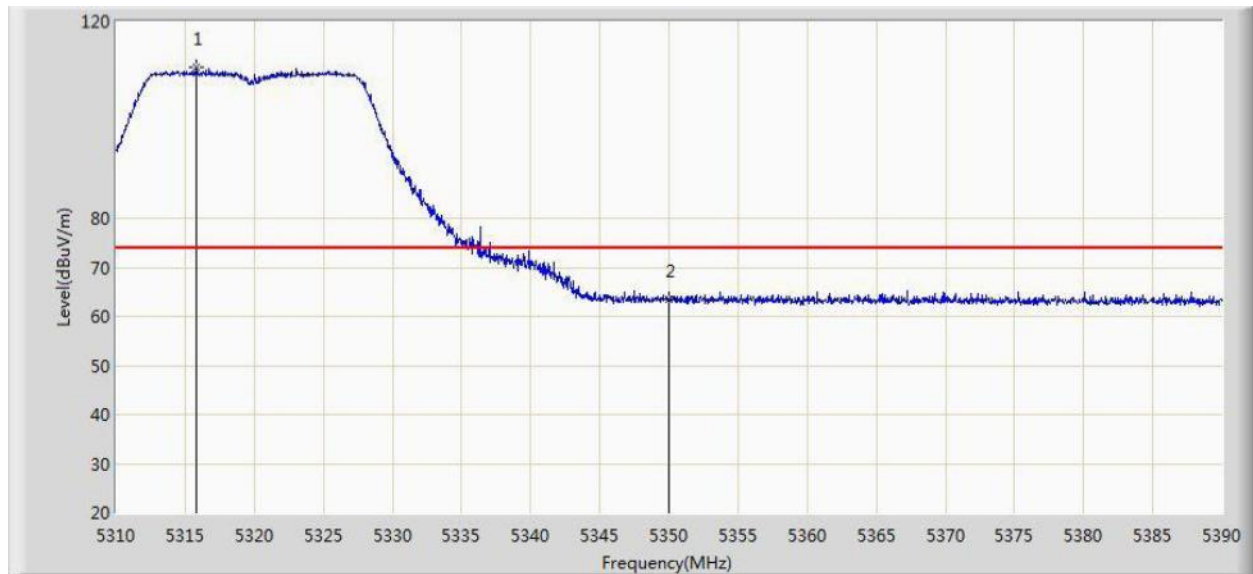


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5315.840	110.747	73.541	N/A	N/A	37.206	PK
2			5350.000	63.504	26.218	-10.496	74.000	37.286	PK

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2015/01/02 - 12:37
Limit: FCC_Part15.209_RE(3m)	Engineer: Roy Cheng
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Wireless LAN Access Point	Power: AC 120V/60Hz
Test Mode: Transmit at channel 5320MHz by 802.11a Ant 2	

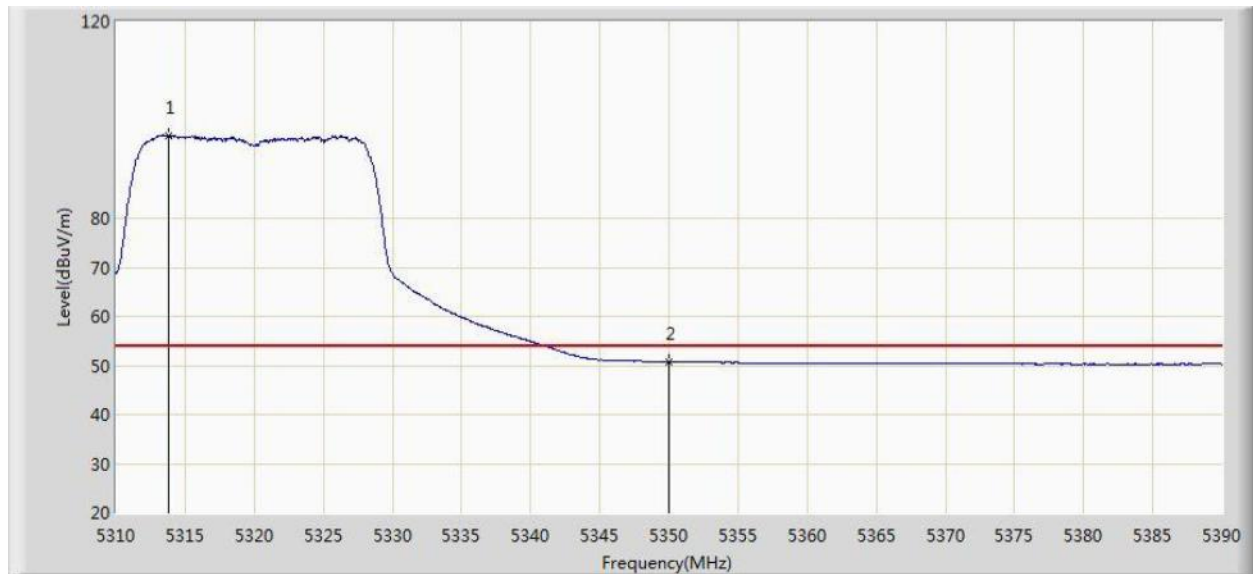


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5313.800	96.924	59.722	N/A	N/A	37.203	AV
2			5350.000	50.777	13.491	-3.223	54.000	37.286	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2015/01/02 - 12:38
Limit: FCC_Part15.209_RE(3m)	Engineer: Roy Cheng
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Wireless LAN Access Point	Power: AC 120V/60Hz
Test Mode: Transmit at channel 5320MHz by 802.11a Ant 2	

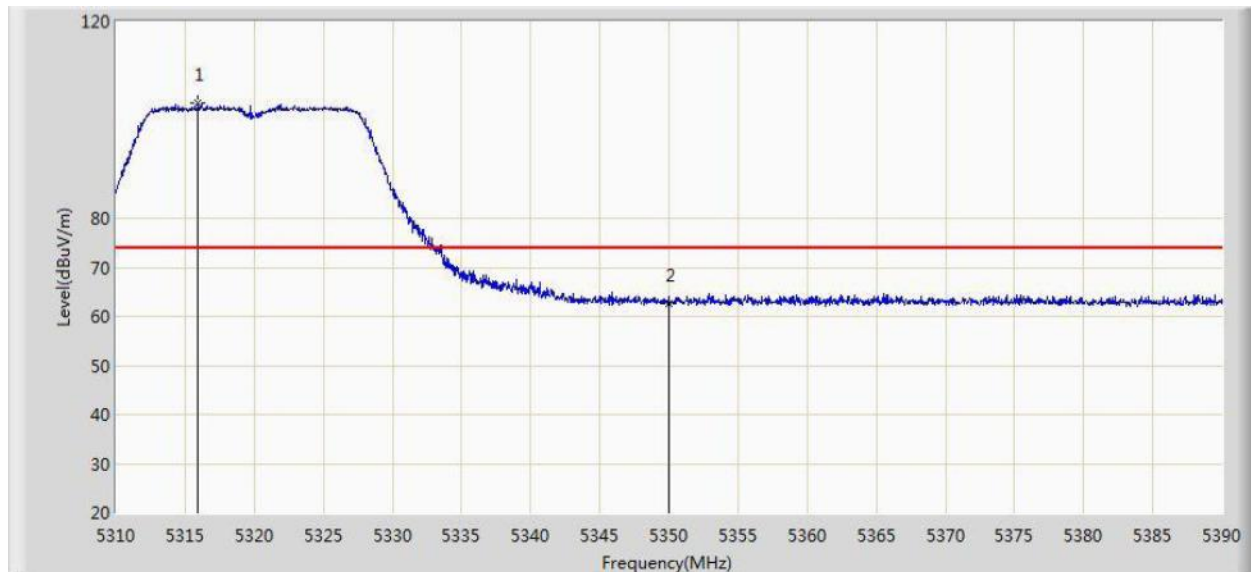


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5315.920	103.507	66.301	N/A	N/A	37.206	PK
2			5350.000	62.581	25.295	-11.419	74.000	37.286	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2015/01/02 - 12:39
Limit: FCC_Part15.209_RE(3m)	Engineer: Roy Cheng
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Wireless LAN Access Point	Power: AC 120V/60Hz
Test Mode: Transmit at channel 5320MHz by 802.11a Ant 2	

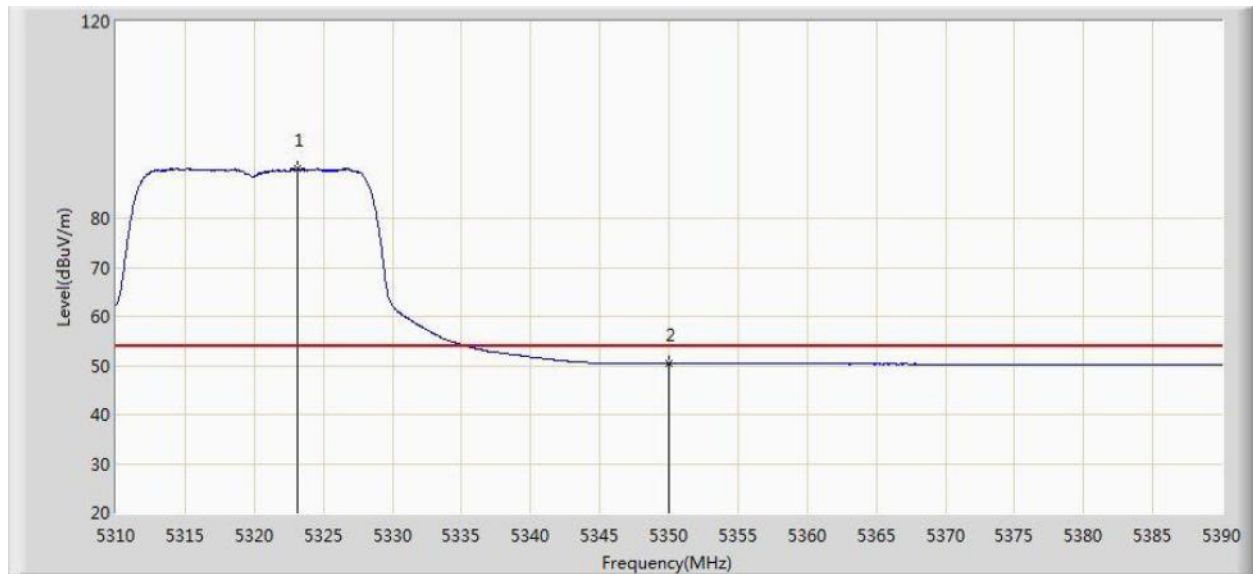


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5323.120	90.066	52.847	N/A	N/A	37.219	AV
2			5350.000	50.463	13.177	-3.537	54.000	37.286	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2015/01/02 - 12:40
Limit: FCC_Part15.209_RE(3m)	Engineer: Roy Cheng
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Wireless LAN Access Point	Power: AC 120V/60Hz
Test Mode: Transmit at channel 5500MHz by 802.11a Ant 2	

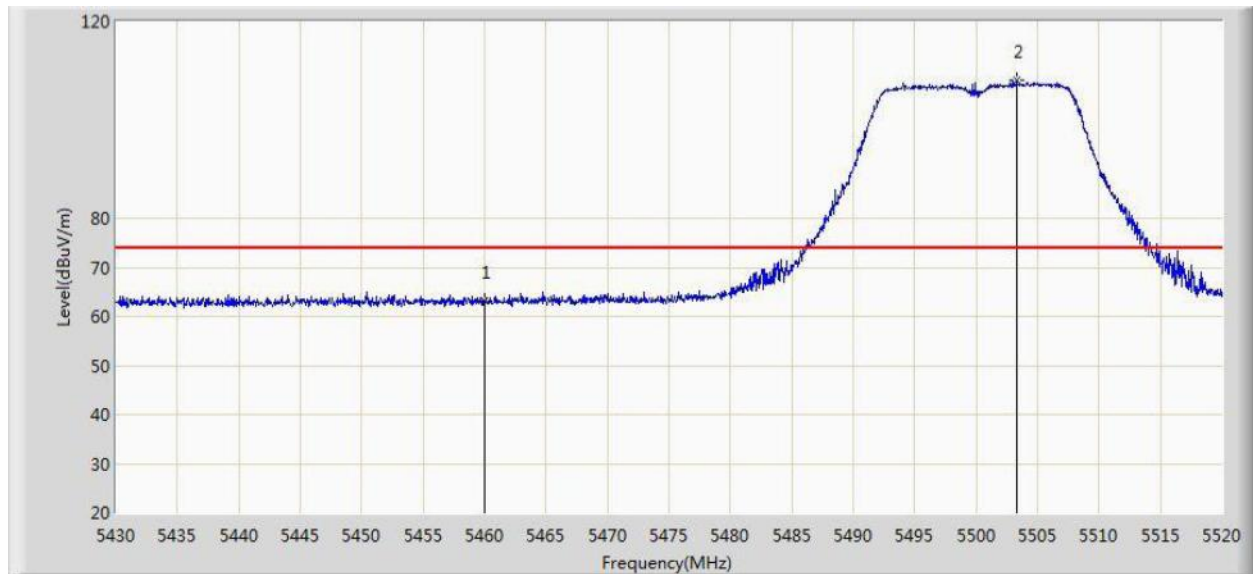


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5460.000	63.266	25.703	-10.734	74.000	37.563	PK
2		*	5503.305	108.170	70.542	N/A	N/A	37.628	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2015/01/02 - 12:42
Limit: FCC_Part15.209_RE(3m)	Engineer: Roy Cheng
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Wireless LAN Access Point	Power: AC 120V/60Hz
Test Mode: Transmit at channel 5500MHz by 802.11a Ant 2	

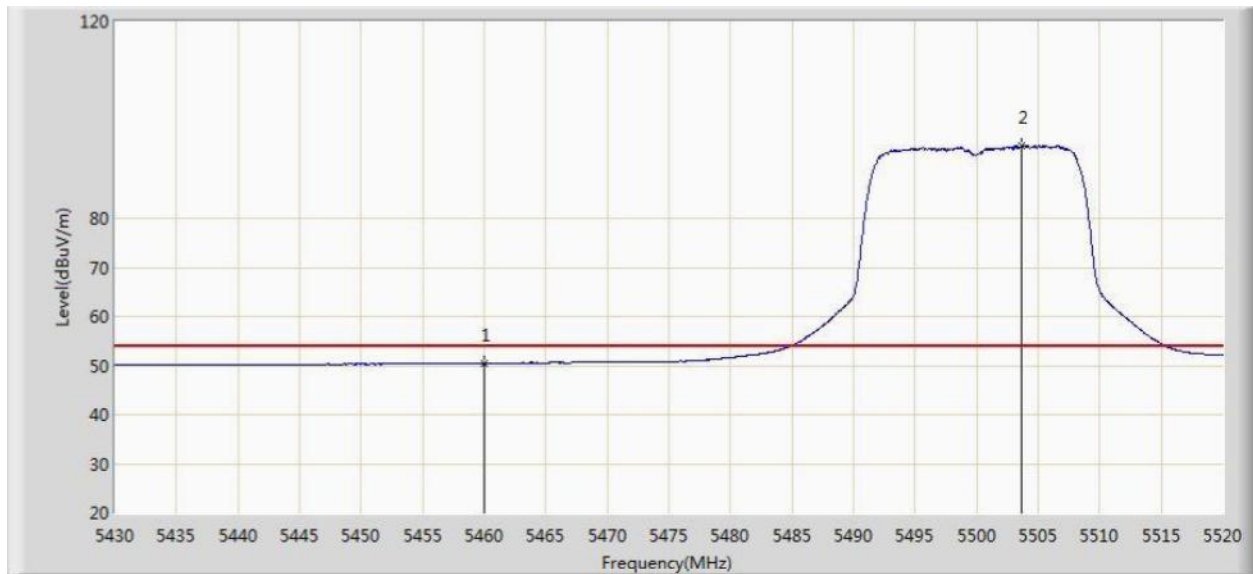


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5460.000	50.493	12.930	-3.507	54.000	37.563	AV
2		*	5503.620	94.698	57.070	N/A	N/A	37.628	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2015/01/02 - 12:42
Limit: FCC_Part15.209_RE(3m)	Engineer: Roy Cheng
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Wireless LAN Access Point	Power: AC 120V/60Hz
Test Mode: Transmit at channel 5500MHz by 802.11a Ant 2	

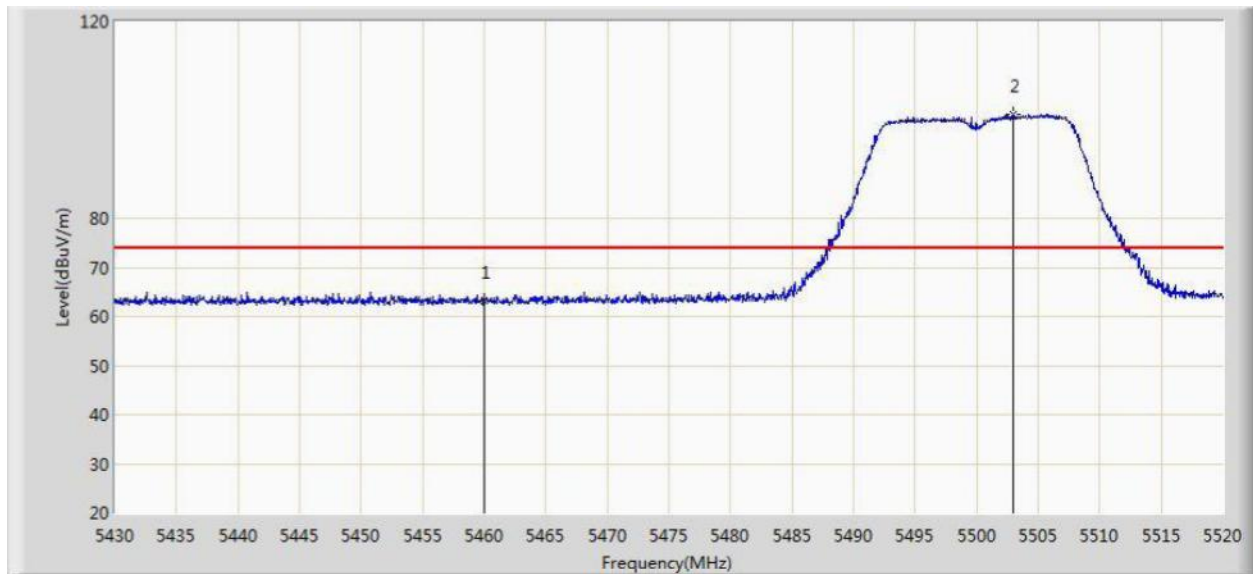


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5460.000	63.202	25.639	-10.798	74.000	37.563	PK
2		*	5502.990	101.292	63.664	N/A	N/A	37.628	PK

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2015/01/02 - 12:44
Limit: FCC_Part15.209_RE(3m)	Engineer: Roy Cheng
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Wireless LAN Access Point	Power: AC 120V/60Hz
Test Mode: Transmit at channel 5500MHz by 802.11a Ant 2	

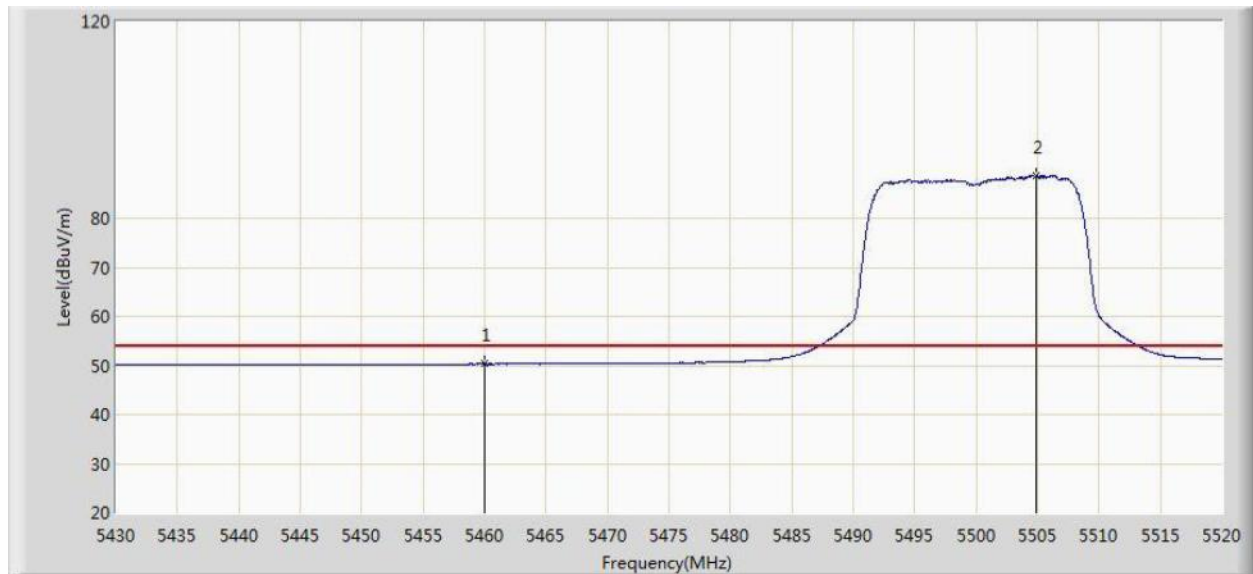


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5460.000	50.302	12.739	-3.698	54.000	37.563	AV
2		*	5504.835	88.593	50.963	N/A	N/A	37.630	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2015/01/02 - 12:45
Limit: FCC_Part15.209_RE(3m)	Engineer: Roy Cheng
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Wireless LAN Access Point	Power: AC 120V/60Hz
Test Mode: Transmit at channel 5700MHz by 802.11a Ant 2	

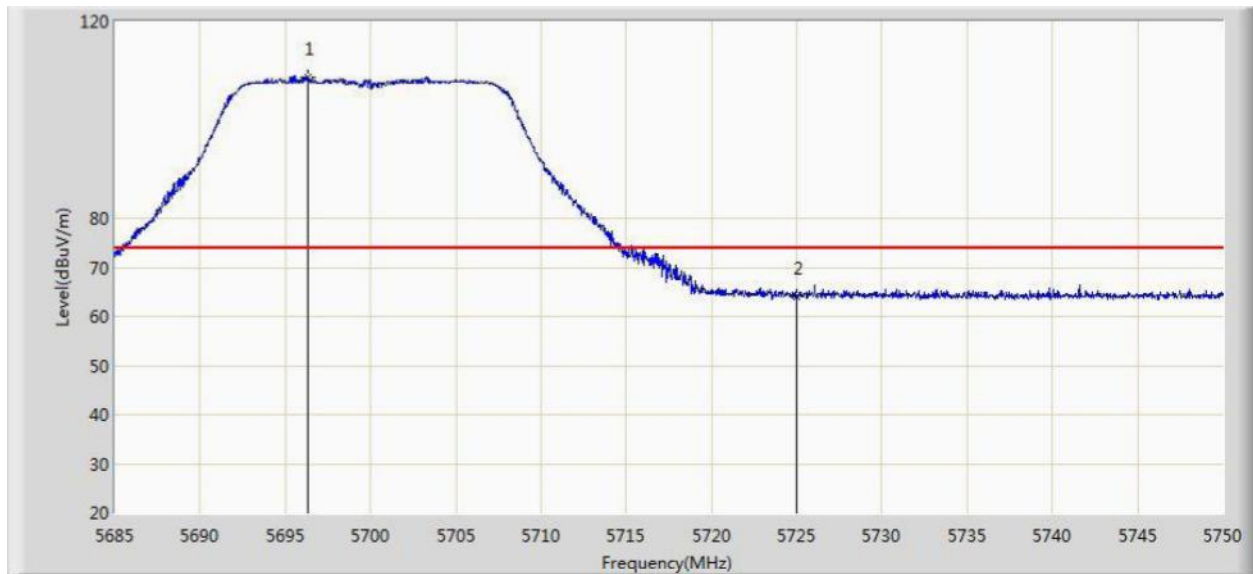


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5696.342	108.696	70.813	N/A	N/A	37.883	PK
2			5725.000	64.186	26.196	-9.814	74.000	37.990	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2015/01/02 - 12:48
Limit: FCC_Part15.209_RE(3m)	Engineer: Roy Cheng
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Wireless LAN Access Point	Power: AC 120V/60Hz
Test Mode: Transmit at channel 5700MHz by 802.11a Ant 2	

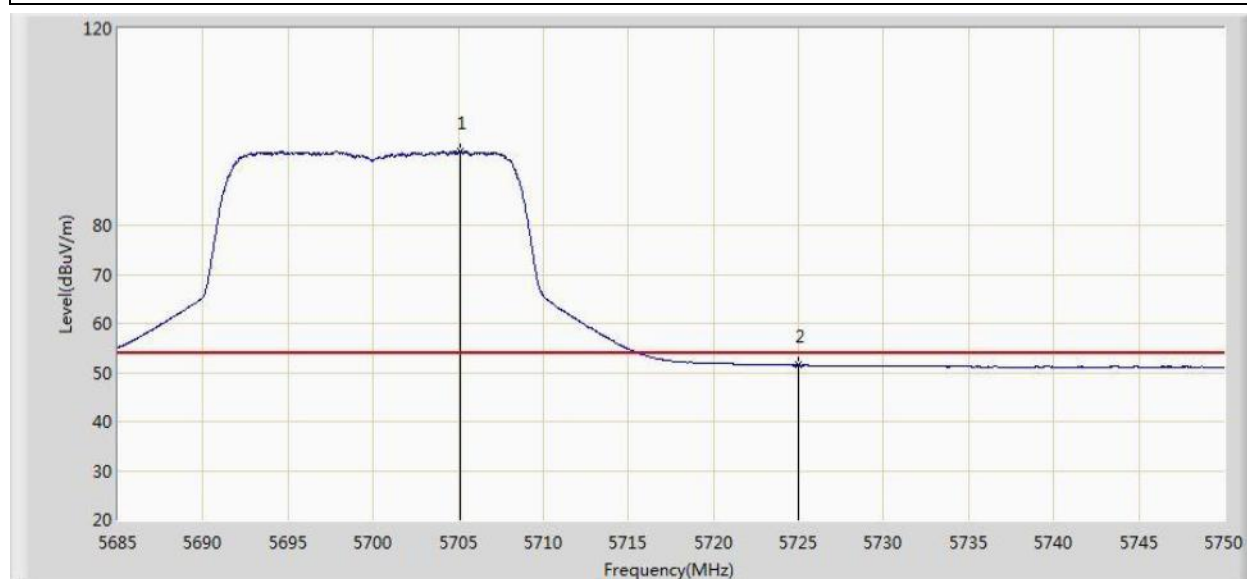


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5705.085	95.015	57.107	N/A	N/A	37.908	AV
2			5725.000	51.461	13.471	-2.539	54.000	37.990	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2015/01/02 - 12:49
Limit: FCC_Part15.209_RE(3m)	Engineer: Roy Cheng
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Wireless LAN Access Point	Power: AC 120V/60Hz
Test Mode: Transmit at channel 5700MHz by 802.11a Ant 2	

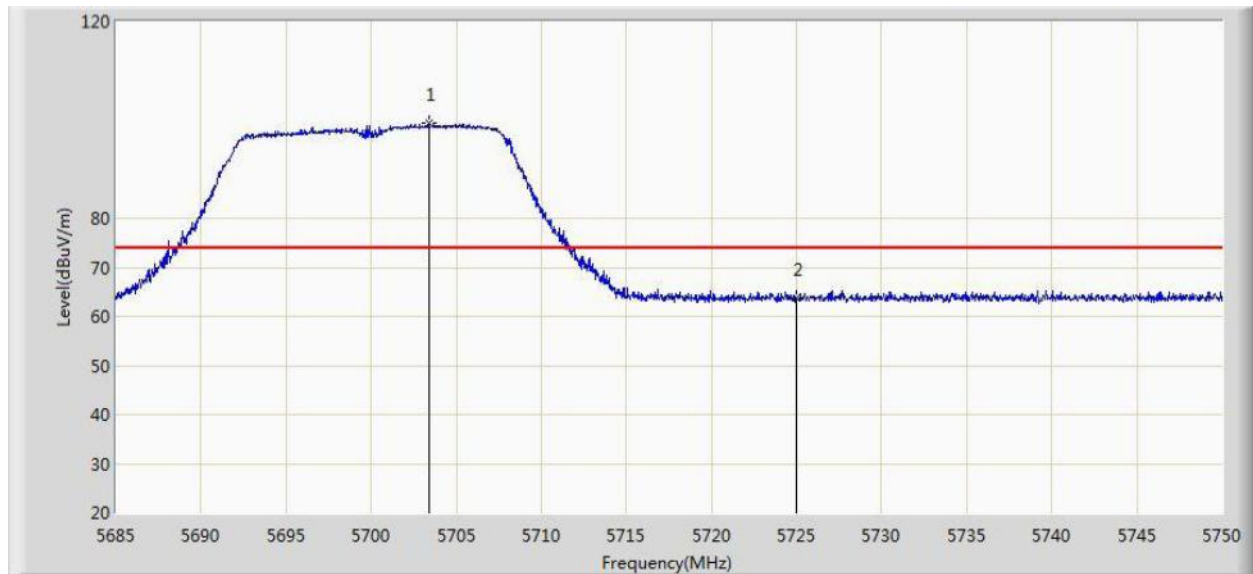


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5703.395	99.486	61.585	N/A	N/A	37.901	PK
2			5725.000	63.800	25.810	-10.200	74.000	37.990	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2015/01/02 - 12:50
Limit: FCC_Part15.209_RE(3m)	Engineer: Roy Cheng
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Wireless LAN Access Point	Power: AC 120V/60Hz
Test Mode: Transmit at channel 5700MHz by 802.11a Ant 2	

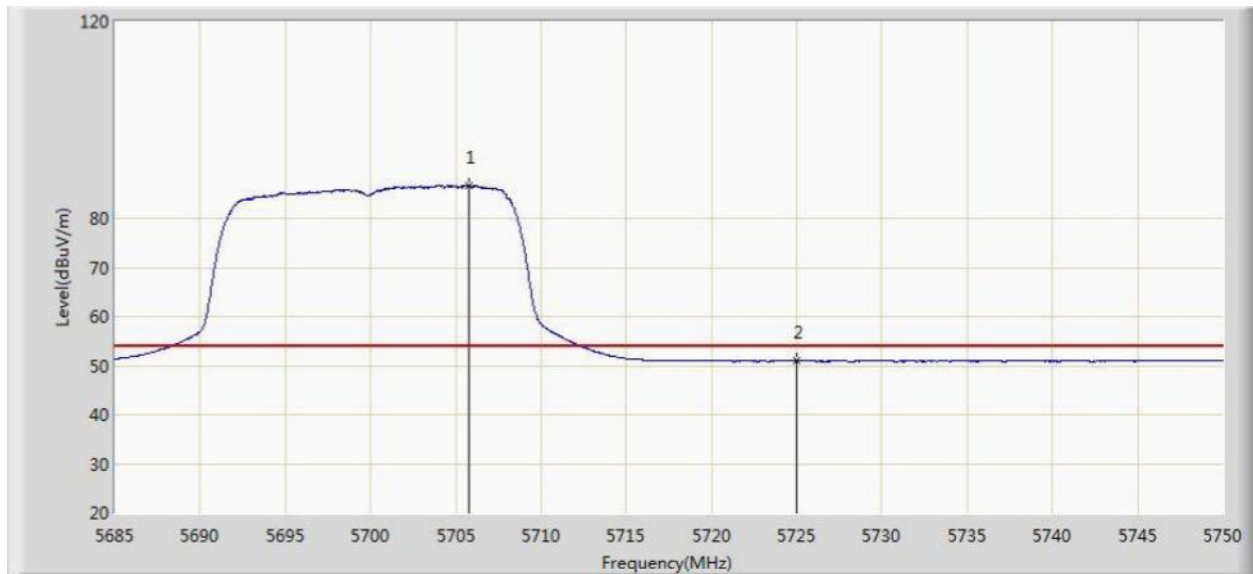


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5705.800	86.774	48.863	N/A	N/A	37.911	AV
2			5725.000	50.902	12.912	-3.098	54.000	37.990	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2015/01/02 - 12:51
Limit: FCC_Part15.209_RE(3m)	Engineer: Roy Cheng
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Wireless LAN Access Point	Power: AC 120V/60Hz
Test Mode: Transmit at channel 5745MHz by 802.11a Ant 2	

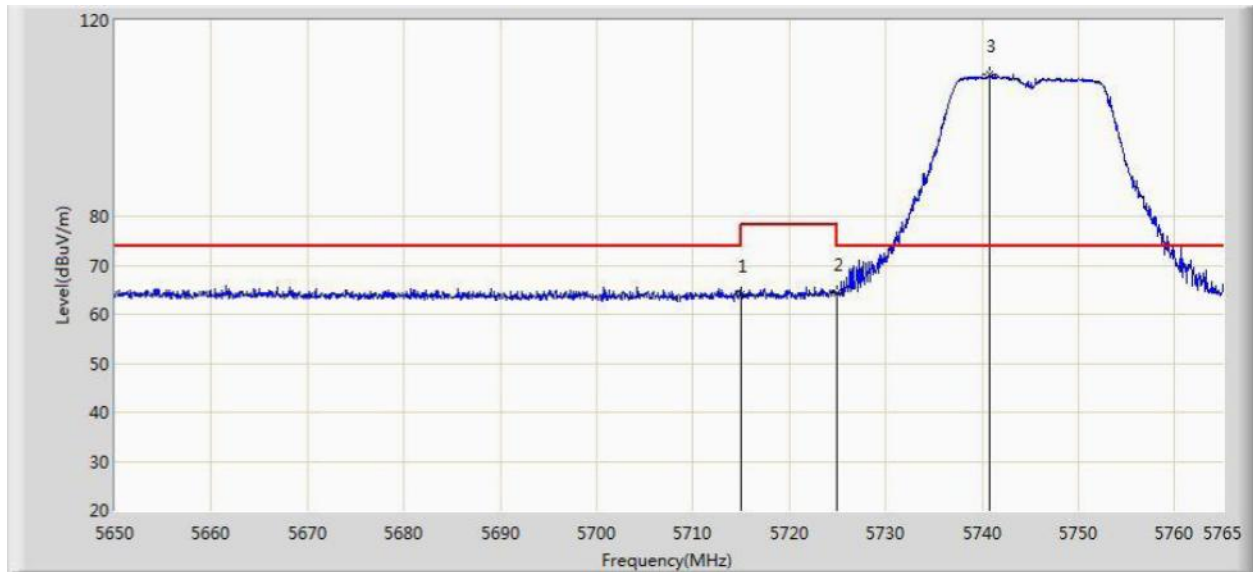


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5715.000	64.173	26.224	-9.827	74.000	37.949	PK
2			5725.000	64.244	26.254	-13.956	78.200	37.990	PK
3		*	5740.735	109.017	70.963	N/A	N/A	38.053	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2015/01/02 - 13:24
Limit: FCC_Part15.209_RE(3m)	Engineer: Roy Cheng
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Wireless LAN Access Point	Power: AC 120V/60Hz
Test Mode: Transmit at channel 5745MHz by 802.11a Ant 2	

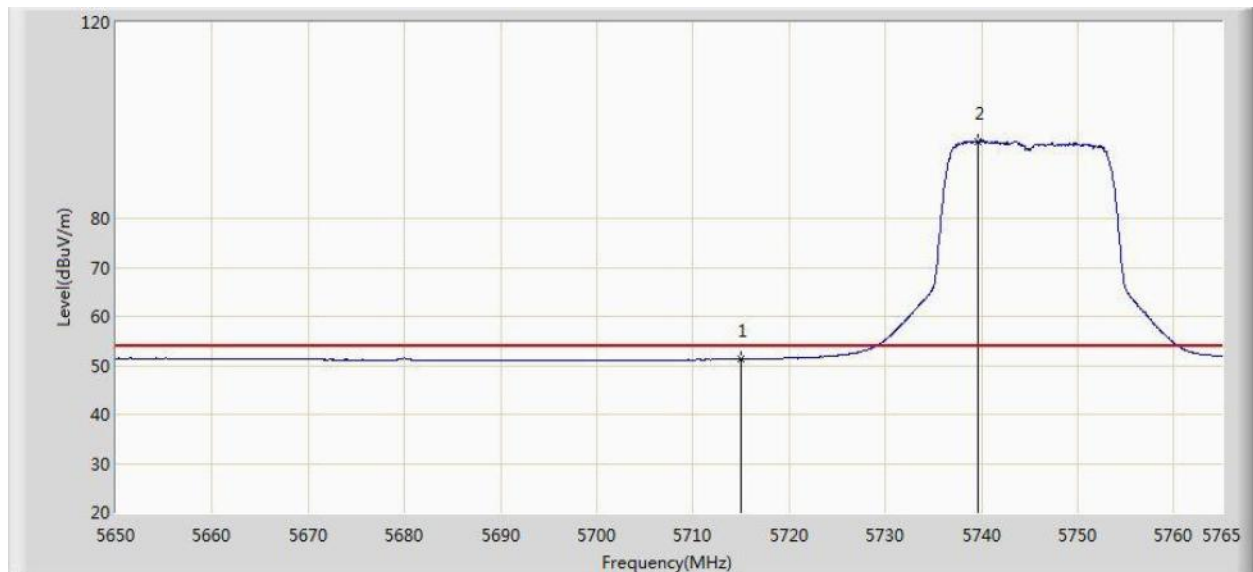


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5715.000	51.227	13.278	-2.773	54.000	37.949	AV
2		*	5739.585	95.659	57.610	N/A	N/A	38.049	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2015/01/02 - 13:25
Limit: FCC_Part15.209_RE(3m)	Engineer: Roy Cheng
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Wireless LAN Access Point	Power: AC 120V/60Hz
Test Mode: Transmit at channel 5745MHz by 802.11a Ant 2	

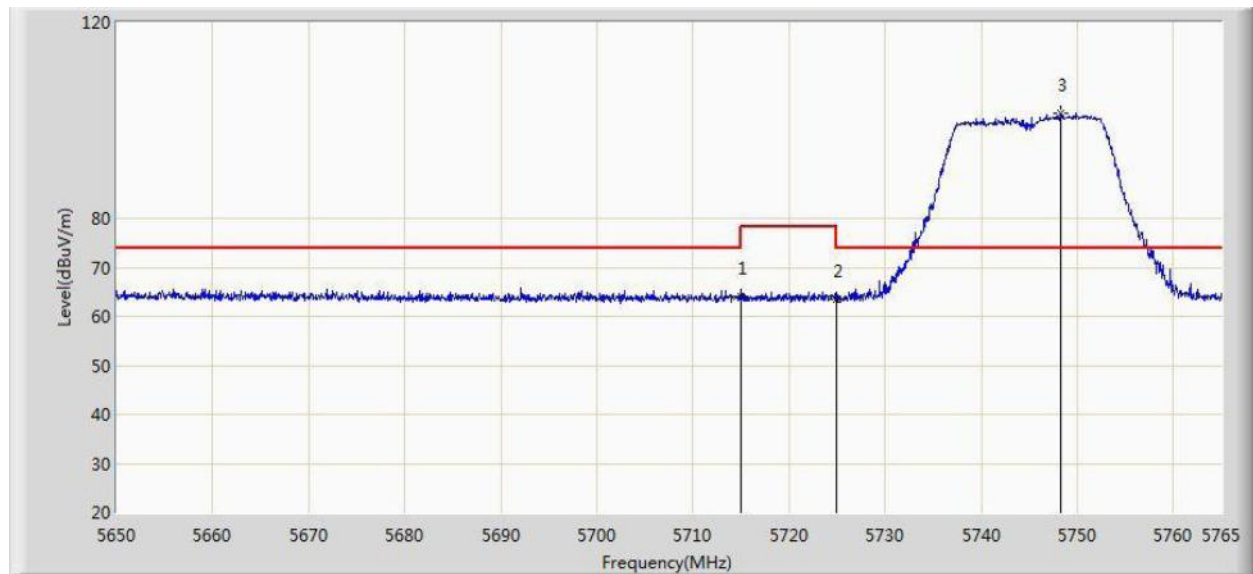


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5715.000	64.190	26.241	-9.810	74.000	37.949	PK
2			5725.000	63.443	25.453	-14.757	78.200	37.990	PK
3		*	5748.268	101.479	63.392	N/A	N/A	38.087	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2015/01/02 - 13:26
Limit: FCC_Part15.209_RE(3m)	Engineer: Roy Cheng
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Wireless LAN Access Point	Power: AC 120V/60Hz
Test Mode: Transmit at channel 5745MHz by 802.11a Ant 2	

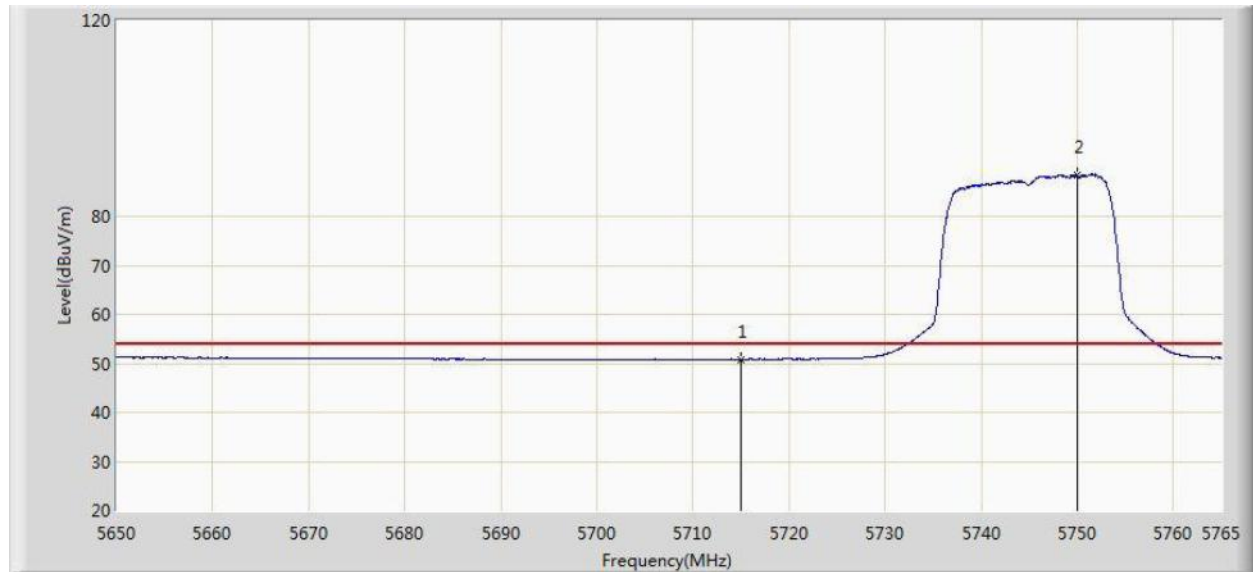


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5715.000	50.858	12.909	-3.142	54.000	37.949	AV
2		*	5749.993	88.498	50.402	N/A	N/A	38.095	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2015/01/02 - 13:27
Limit: FCC_Part15.209_RE(3m)	Engineer: Roy Cheng
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Wireless LAN Access Point	Power: AC 120V/60Hz
Test Mode: Transmit at channel 5825MHz by 802.11a Ant 2	

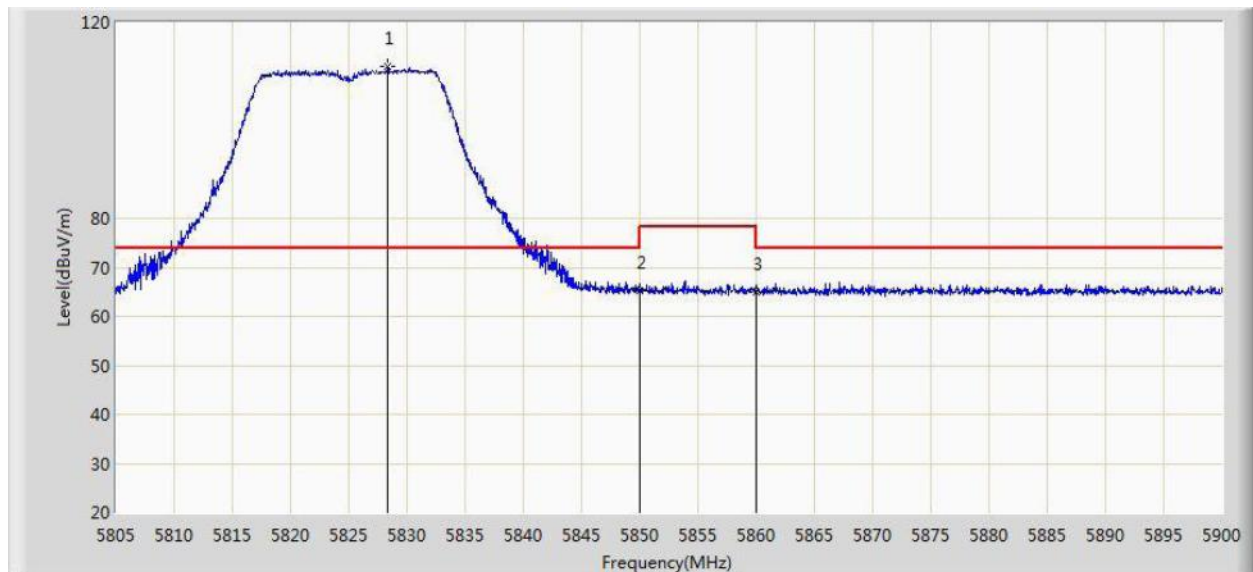


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5828.322	111.139	72.770	N/A	N/A	38.369	PK
2			5850.000	65.103	26.650	-13.097	78.200	38.454	PK
3			5860.000	64.976	26.498	-9.024	74.000	38.478	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2015/01/02 - 13:29
Limit: FCC_Part15.209_RE(3m)	Engineer: Roy Cheng
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Wireless LAN Access Point	Power: AC 120V/60Hz
Test Mode: Transmit at channel 5825MHz by 802.11a Ant 2	

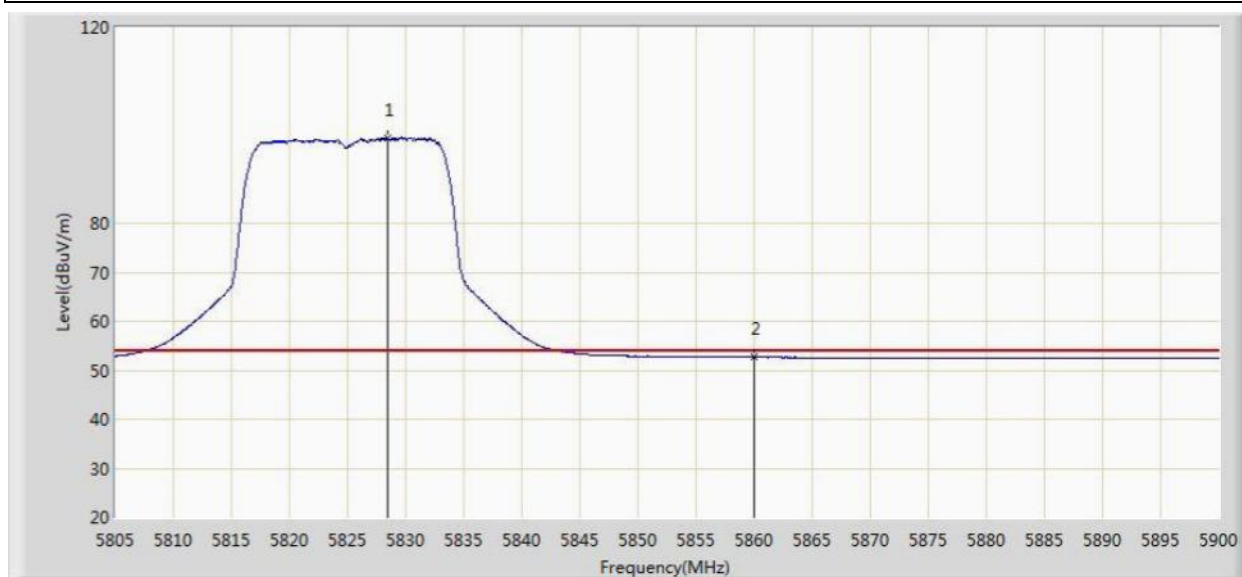


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5828.417	97.526	59.156	N/A	N/A	38.369	AV
2			5860.000	52.648	14.170	-1.352	54.000	38.478	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2015/01/02 - 13:29
Limit: FCC_Part15.209_RE(3m)	Engineer: Roy Cheng
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Wireless LAN Access Point	Power: AC 120V/60Hz
Test Mode: Transmit at channel 5825MHz by 802.11a Ant 2	

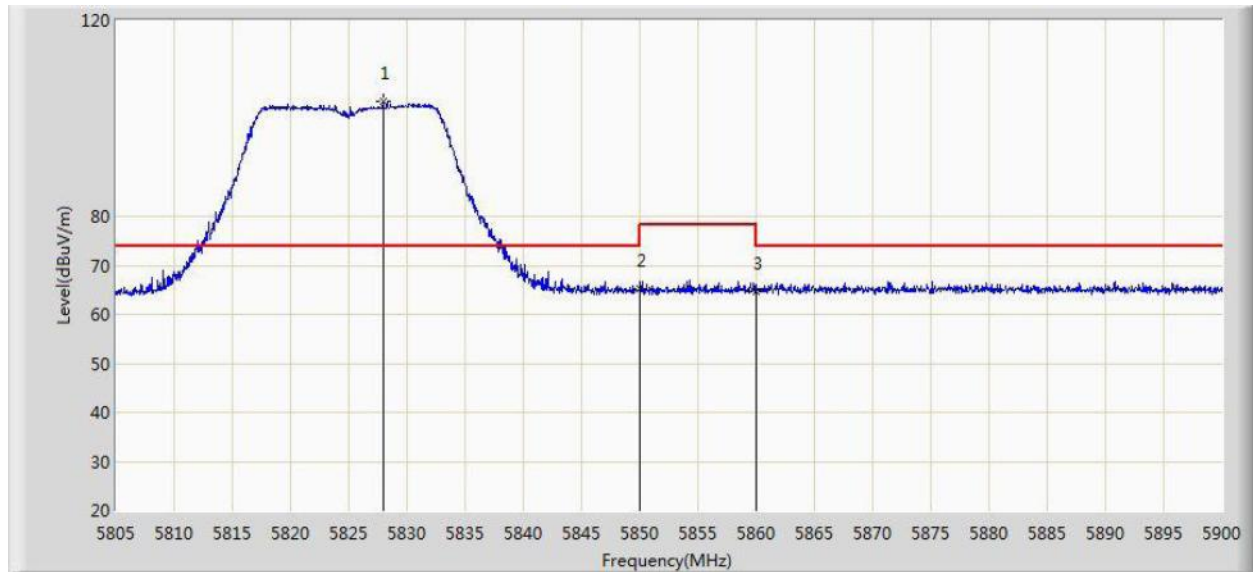


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5827.942	103.547	65.179	N/A	N/A	38.368	PK
2			5850.000	65.235	26.782	-12.965	78.200	38.454	PK
3			5860.000	64.697	26.219	-9.303	74.000	38.478	PK

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2015/01/02 - 13:31
Limit: FCC_Part15.209_RE(3m)	Engineer: Roy Cheng
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Wireless LAN Access Point	Power: AC 120V/60Hz
Test Mode: Transmit at channel 5825MHz by 802.11a Ant 2	

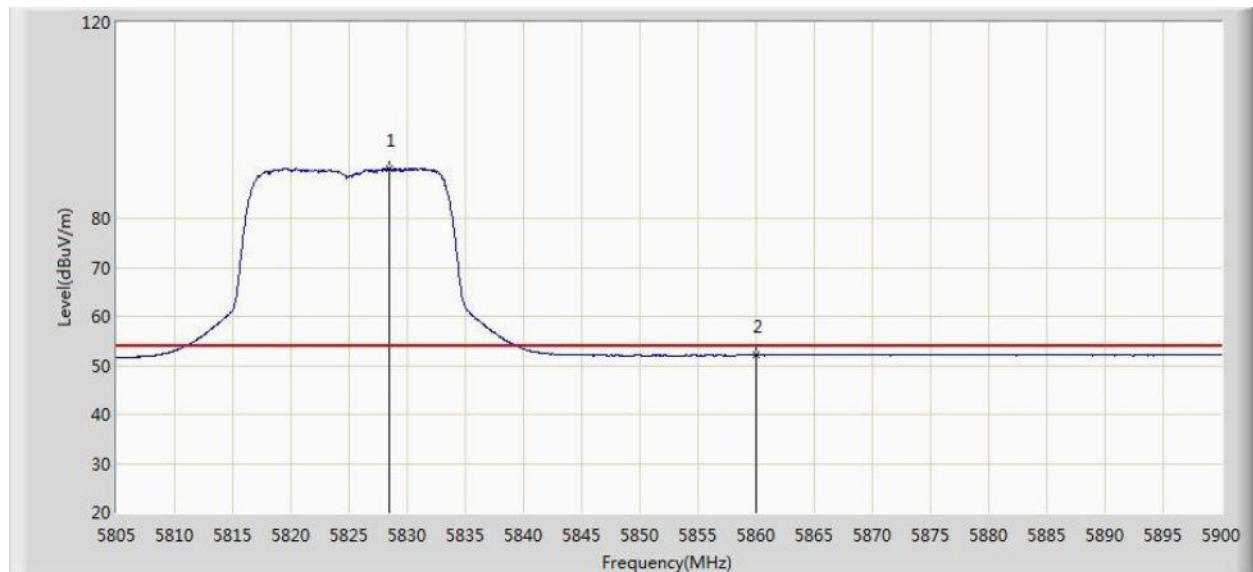


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5828.465	90.174	51.804	N/A	N/A	38.370	AV
2			5860.000	52.103	13.625	-1.897	54.000	38.478	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2015/01/02 - 13:32
Limit: FCC_Part15.209_RE(3m)	Engineer: Roy Cheng
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Wireless LAN Access Point	Power: AC 120V/60Hz
Test Mode: Transmit at channel 5180MHz by 802.11n-HT20 Ant 2	

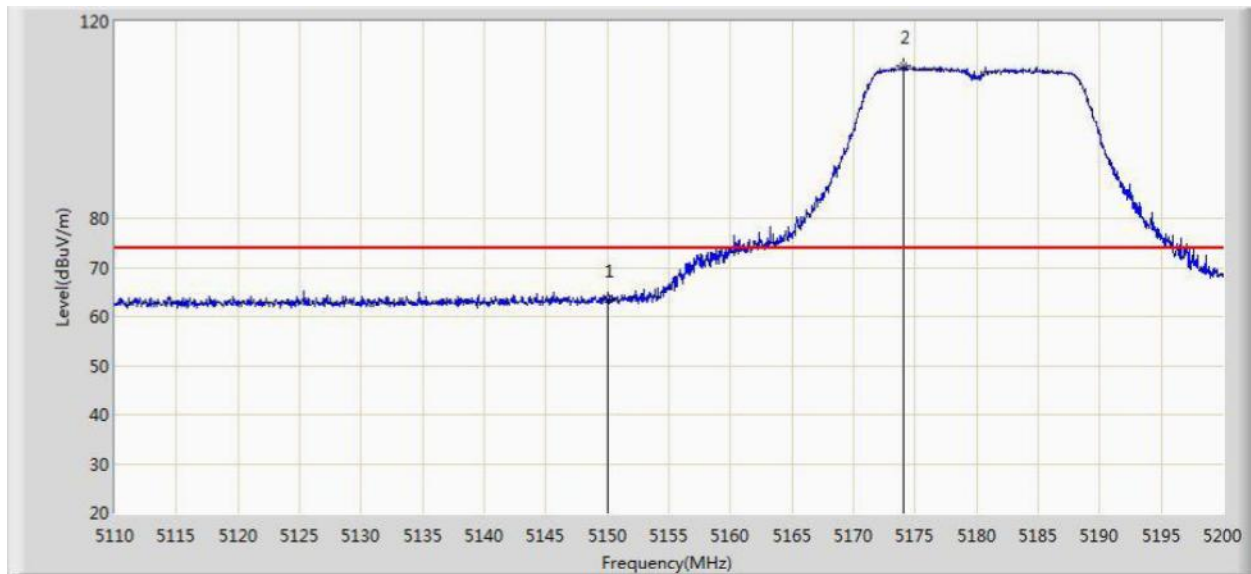


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5150.000	63.346	25.894	-10.654	74.000	37.452	PK
2		*	5174.035	110.973	73.586	N/A	N/A	37.388	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2015/01/02 - 13:34
Limit: FCC_Part15.209_RE(3m)	Engineer: Roy Cheng
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Wireless LAN Access Point	Power: AC 120V/60Hz
Test Mode: Transmit at channel 5180MHz by 802.11n-HT20 Ant 2	

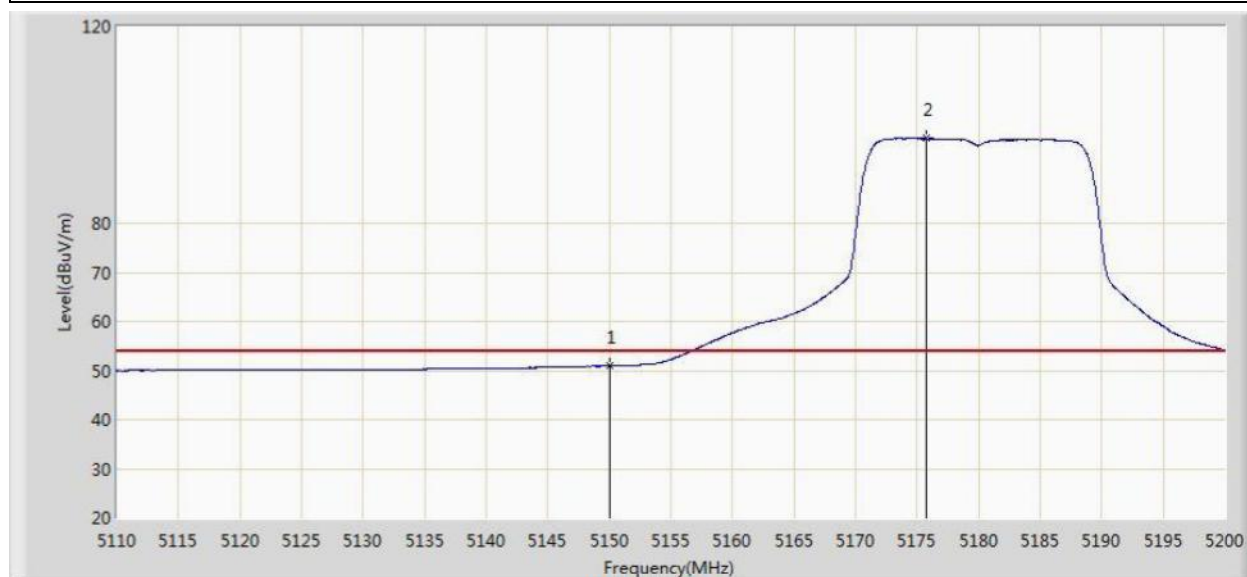


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5150.000	50.956	13.504	-3.044	54.000	37.452	AV
2		*	5175.745	97.304	59.921	N/A	N/A	37.384	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2015/01/02 - 13:35
Limit: FCC_Part15.209_RE(3m)	Engineer: Roy Cheng
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Wireless LAN Access Point	Power: AC 120V/60Hz
Test Mode: Transmit at channel 5180MHz by 802.11n-HT20 Ant 2	

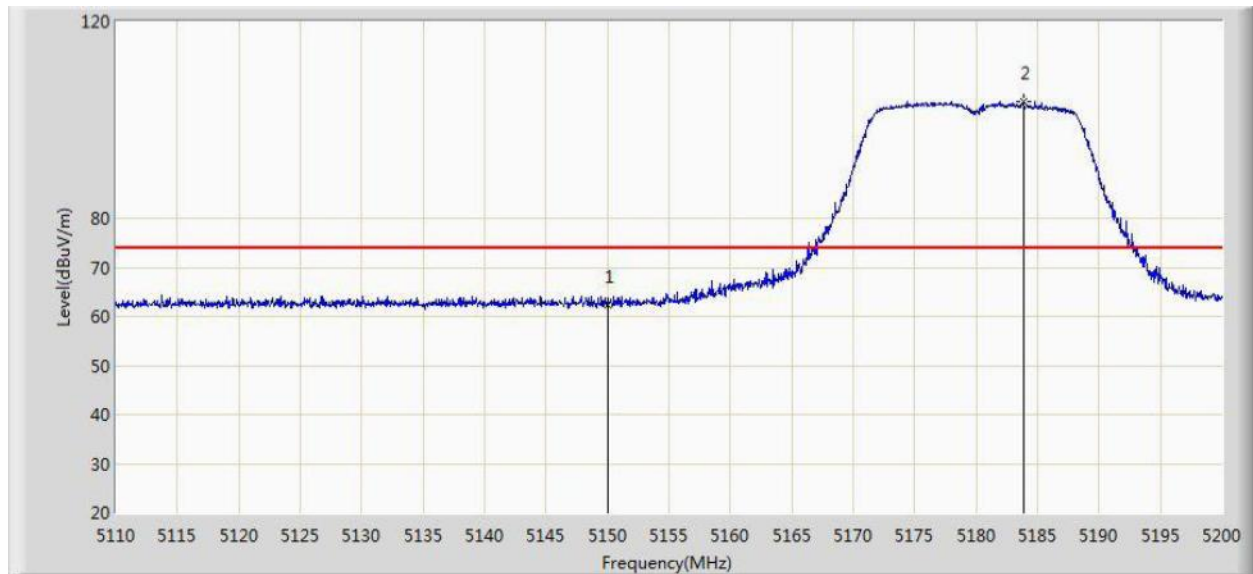


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5150.000	62.400	24.948	-11.600	74.000	37.452	PK
2		*	5183.845	103.845	66.481	N/A	N/A	37.365	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2015/01/02 - 13:36
Limit: FCC_Part15.209_RE(3m)	Engineer: Roy Cheng
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Wireless LAN Access Point	Power: AC 120V/60Hz
Test Mode: Transmit at channel 5180MHz by 802.11n-HT20 Ant 2	

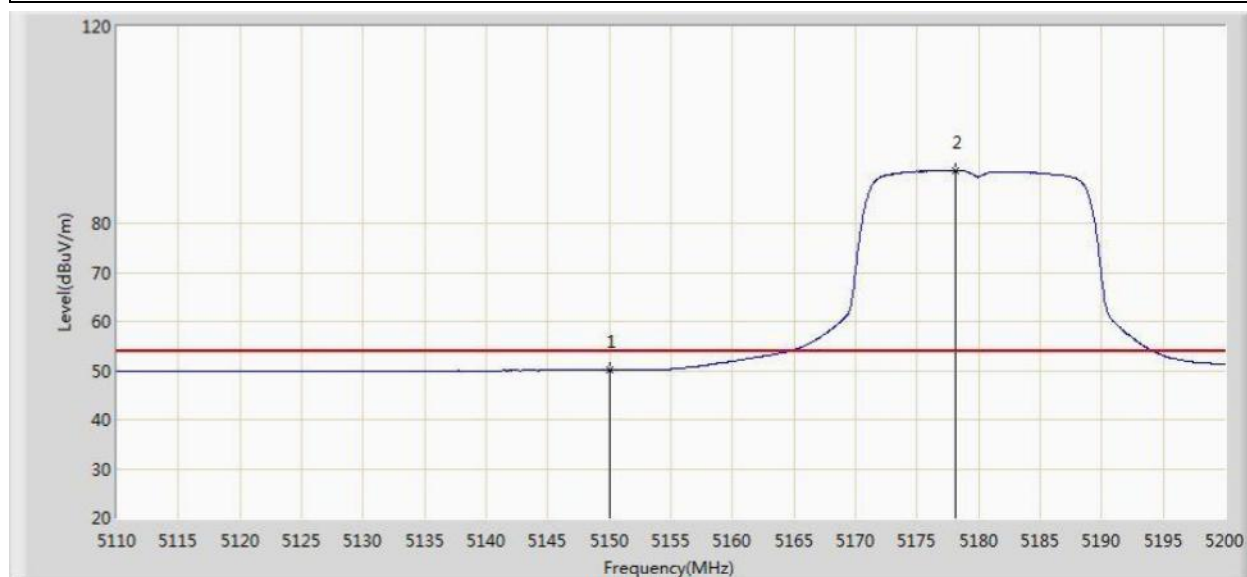


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5150.000	50.115	12.663	-3.885	54.000	37.452	AV
2		*	5178.130	90.801	53.423	N/A	N/A	37.378	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2015/01/02 - 13:36
Limit: FCC_Part15.209_RE(3m)	Engineer: Roy Cheng
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Wireless LAN Access Point	Power: AC 120V/60Hz
Test Mode: Transmit at channel 5320MHz by 802.11n-HT20 Ant 2	

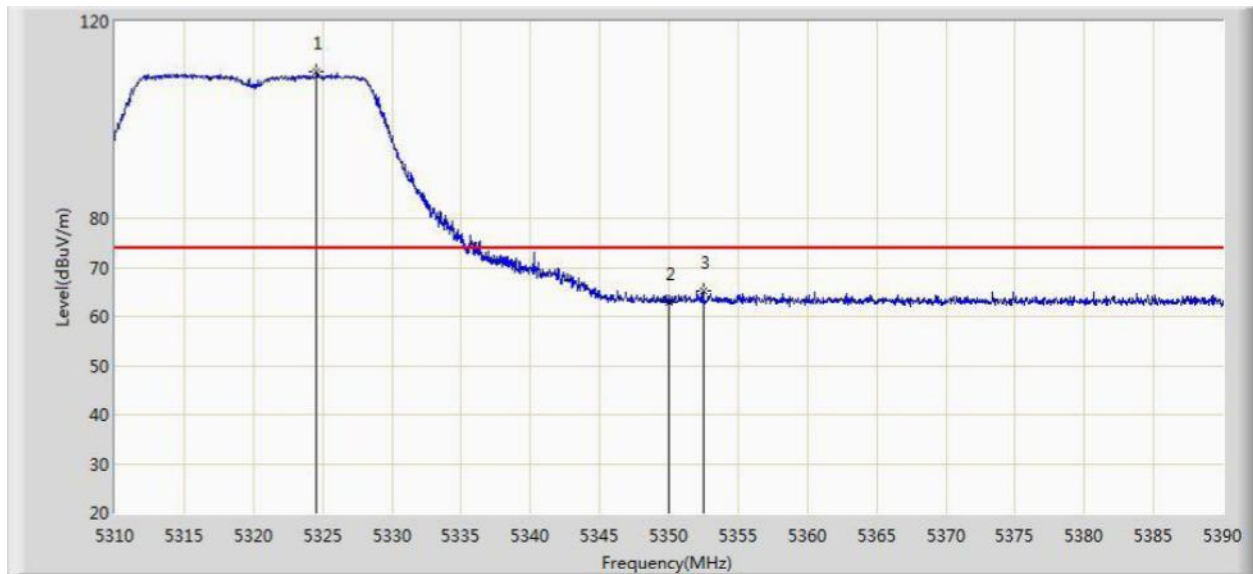


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5324.560	109.794	72.572	N/A	N/A	37.222	PK
2			5350.000	63.021	25.735	-10.979	74.000	37.286	PK
3			5352.480	65.093	27.799	-8.907	74.000	37.293	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2015/01/02 - 13:38
Limit: FCC_Part15.209_RE(3m)	Engineer: Roy Cheng
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Wireless LAN Access Point	Power: AC 120V/60Hz
Test Mode: Transmit at channel 5320MHz by 802.11n-HT20 Ant 2	

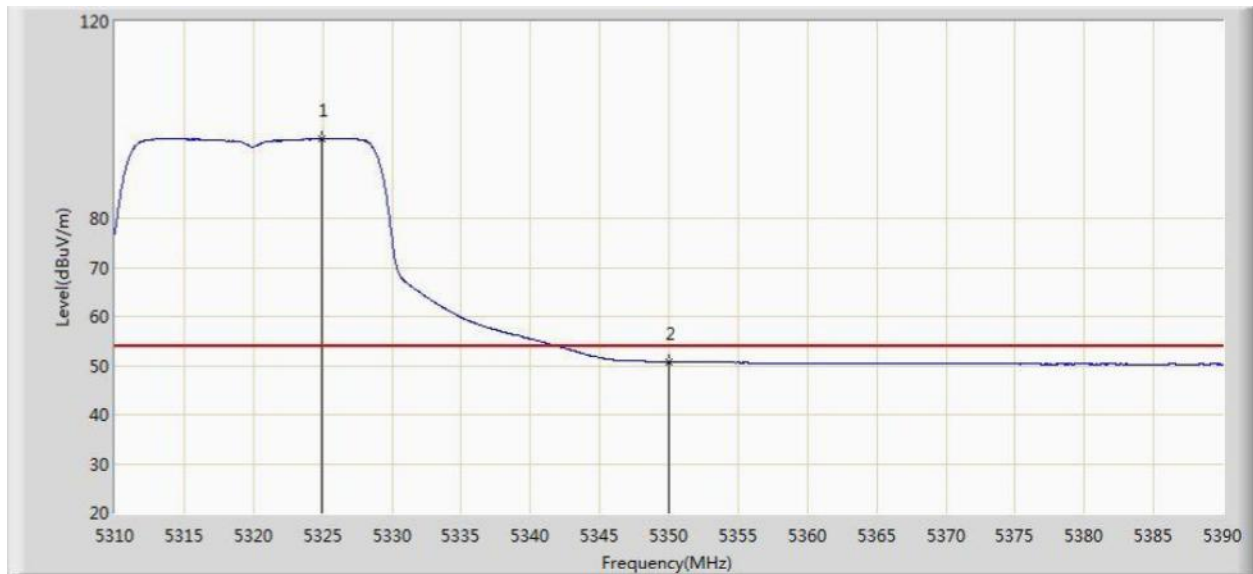


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5324.960	96.267	59.045	N/A	N/A	37.223	AV
2			5350.000	50.781	13.495	-3.219	54.000	37.286	AV

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2015/01/02 - 13:39
Limit: FCC_Part15.209_RE(3m)	Engineer: Roy Cheng
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Wireless LAN Access Point	Power: AC 120V/60Hz
Test Mode: Transmit at channel 5320MHz by 802.11n-HT20 Ant 2	

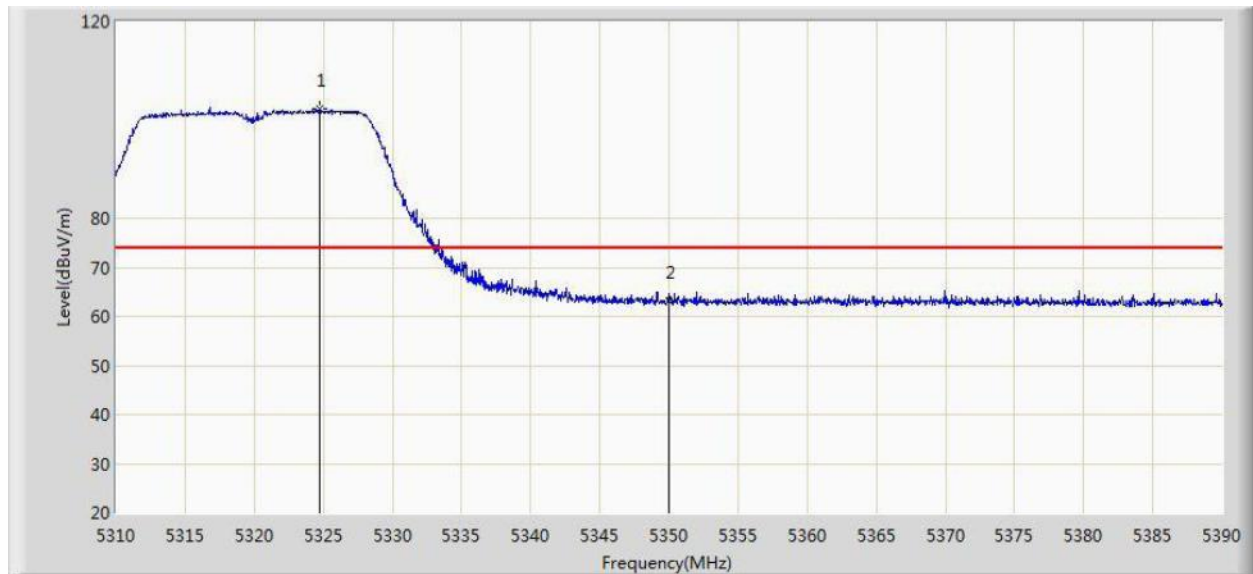


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5324.760	102.197	64.975	N/A	N/A	37.222	PK
2			5350.000	63.152	25.866	-10.848	74.000	37.286	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2015/01/02 - 13:40
Limit: FCC_Part15.209_RE(3m)	Engineer: Roy Cheng
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Wireless LAN Access Point	Power: AC 120V/60Hz
Test Mode: Transmit at channel 5320MHz by 802.11n-HT20 Ant 2	

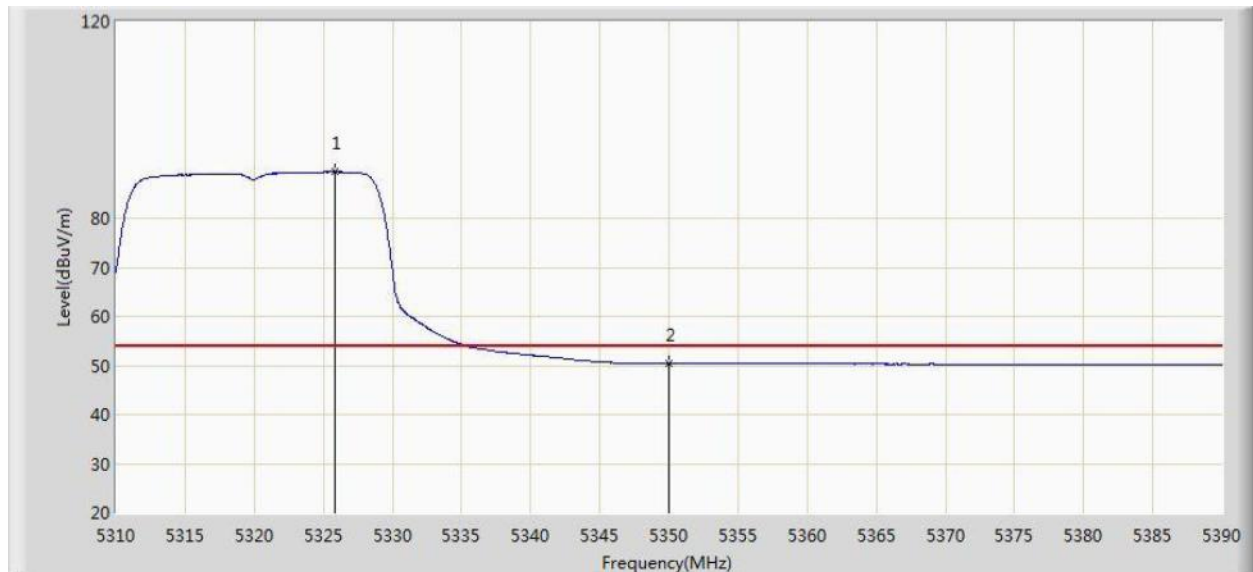


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5325.880	89.439	52.215	N/A	N/A	37.224	AV
2			5350.000	50.450	13.164	-3.550	54.000	37.286	AV

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2015/01/02 - 13:40
Limit: FCC_Part15.209_RE(3m)	Engineer: Roy Cheng
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Wireless LAN Access Point	Power: AC 120V/60Hz
Test Mode: Transmit at channel 5500MHz by 802.11n-HT20 Ant 2	

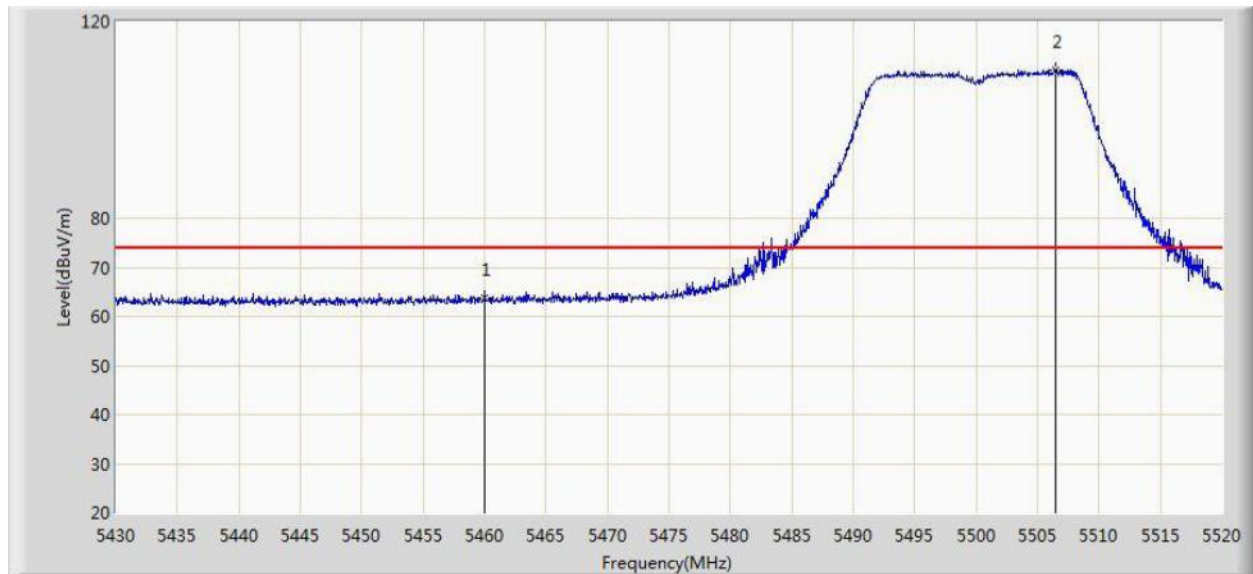


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5460.000	63.754	26.191	-10.246	74.000	37.563	PK
2		*	5506.455	110.287	72.656	N/A	N/A	37.631	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2015/01/02 - 13:42
Limit: FCC_Part15.209_RE(3m)	Engineer: Roy Cheng
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Wireless LAN Access Point	Power: AC 120V/60Hz
Test Mode: Transmit at channel 5500MHz by 802.11n-HT20 Ant 2	

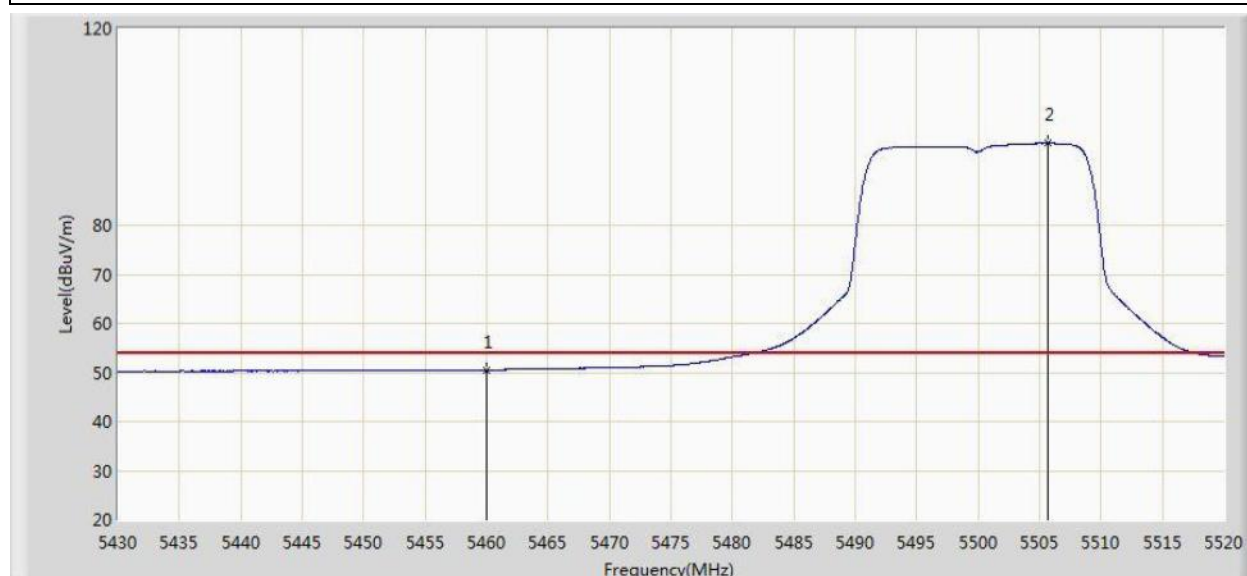


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5460.000	50.545	12.982	-3.455	54.000	37.563	AV
2		*	5505.690	96.713	59.082	N/A	N/A	37.630	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2015/01/02 - 13:44
Limit: FCC_Part15.209_RE(3m)	Engineer: Roy Cheng
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Wireless LAN Access Point	Power: AC 120V/60Hz
Test Mode: Transmit at channel 5500MHz by 802.11n-HT20 Ant 2	

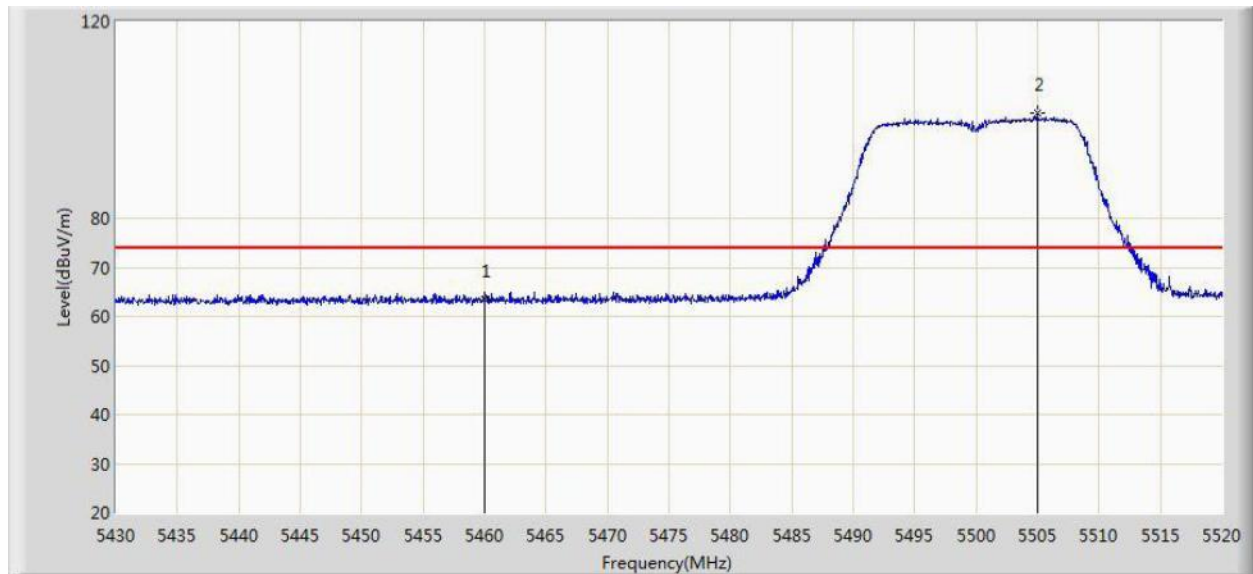


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5460.000	63.345	25.782	-10.655	74.000	37.563	PK
2		*	5504.970	101.351	63.721	N/A	N/A	37.630	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2015/01/02 - 13:46
Limit: FCC_Part15.209_RE(3m)	Engineer: Roy Cheng
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Wireless LAN Access Point	Power: AC 120V/60Hz
Test Mode: Transmit at channel 5500MHz by 802.11n-HT20 Ant 2	

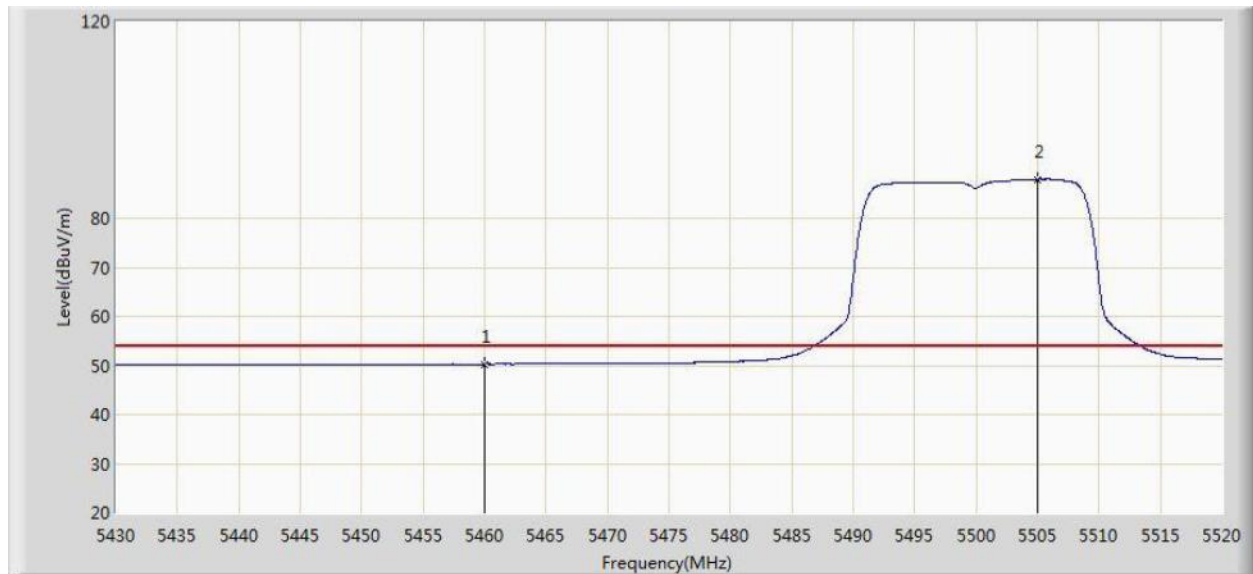


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5460.000	50.276	12.713	-3.724	54.000	37.563	AV
2		*	5504.970	87.951	50.321	N/A	N/A	37.630	AV

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2015/01/02 - 13:46
Limit: FCC_Part15.209_RE(3m)	Engineer: Roy Cheng
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Wireless LAN Access Point	Power: AC 120V/60Hz
Test Mode: Transmit at channel 5700MHz by 802.11n-HT20 Ant 2	

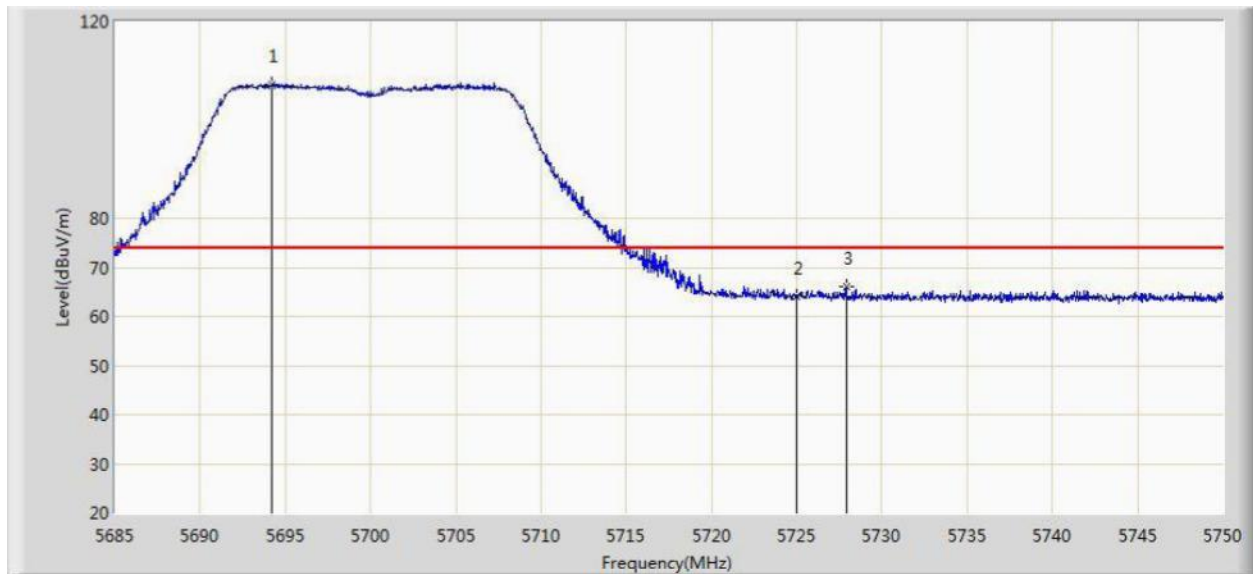


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5694.165	107.132	69.254	N/A	N/A	37.878	PK
2			5725.000	63.963	25.973	-10.037	74.000	37.990	PK
3			5727.933	66.154	28.152	-7.846	74.000	38.002	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2015/01/02 - 13:48
Limit: FCC_Part15.209_RE(3m)	Engineer: Roy Cheng
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Wireless LAN Access Point	Power: AC 120V/60Hz
Test Mode: Transmit at channel 5700MHz by 802.11n-HT20 Ant 2	

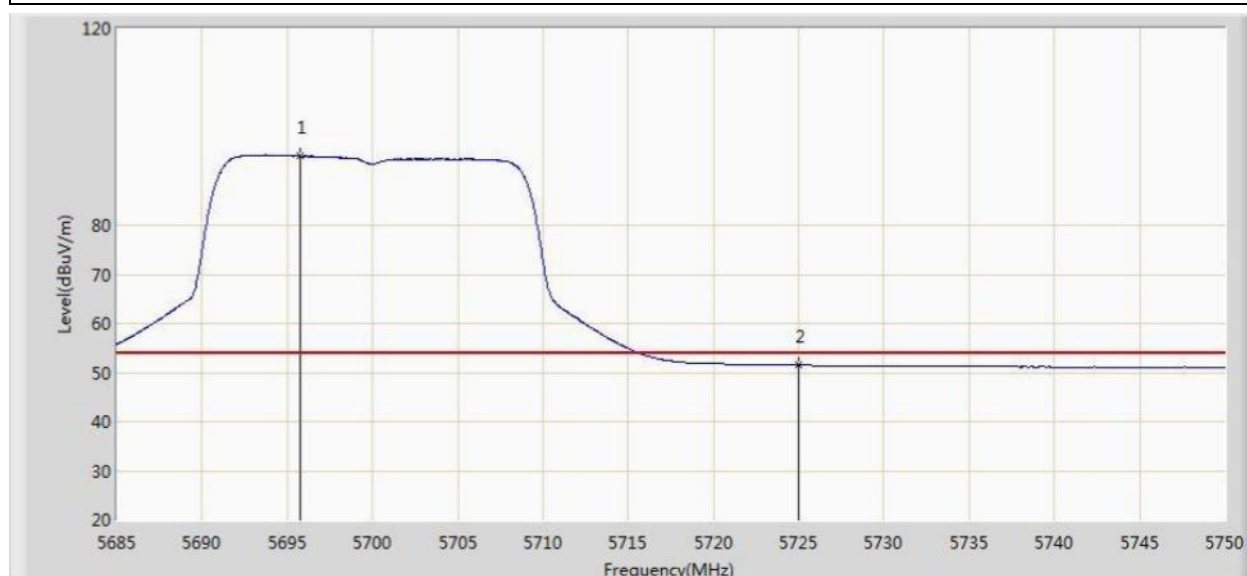


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5695.790	94.107	56.225	N/A	N/A	37.882	AV
2			5725.000	51.471	13.481	-2.529	54.000	37.990	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2015/01/02 - 13:48
Limit: FCC_Part15.209_RE(3m)	Engineer: Roy Cheng
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Wireless LAN Access Point	Power: AC 120V/60Hz
Test Mode: Transmit at channel 5700MHz by 802.11n-HT20 Ant 2	

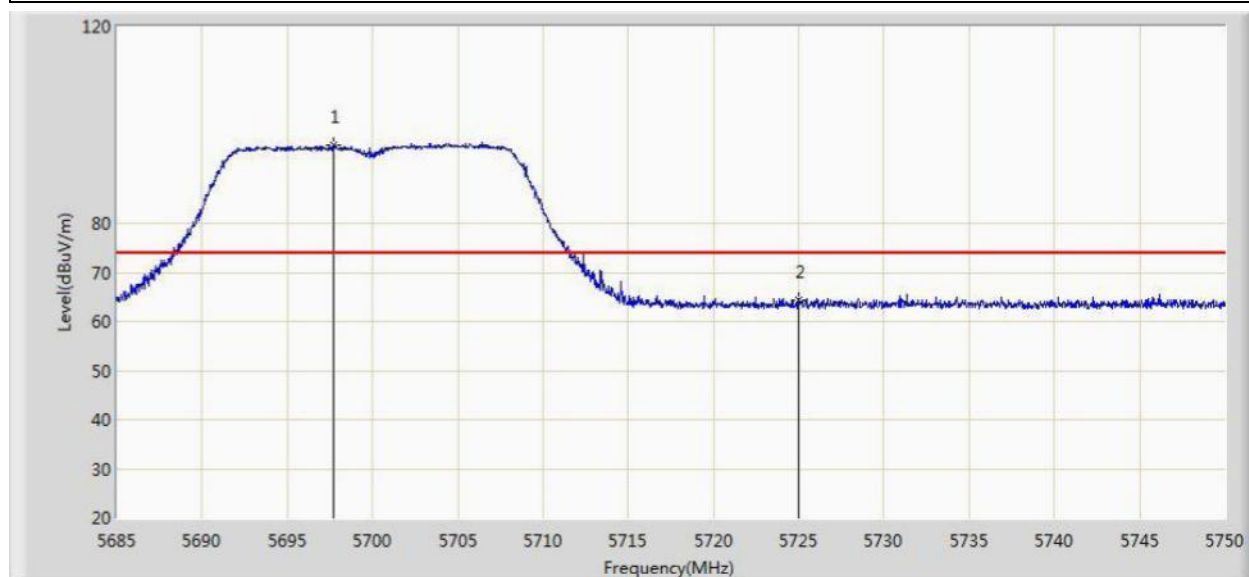


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5697.740	96.040	58.154	N/A	N/A	37.887	PK
2			5725.000	64.380	26.390	-9.620	74.000	37.990	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2015/01/02 - 13:49
Limit: FCC_Part15.209_RE(3m)	Engineer: Roy Cheng
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Wireless LAN Access Point	Power: AC 120V/60Hz
Test Mode: Transmit at channel 5700MHz by 802.11n-HT20 Ant 2	

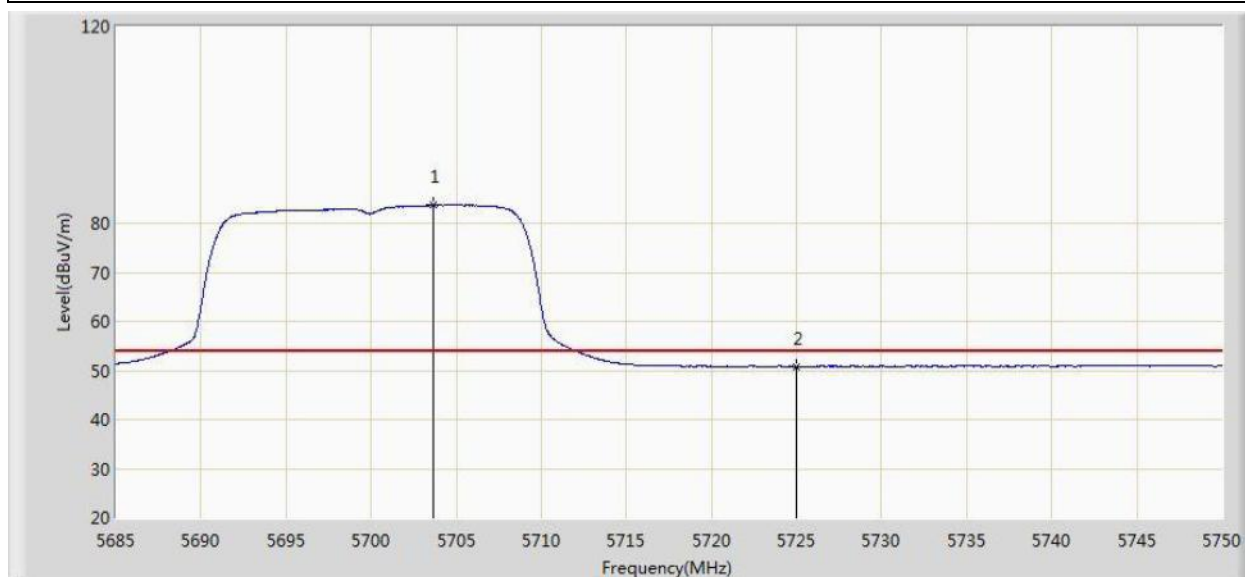


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5703.655	83.631	45.729	N/A	N/A	37.902	AV
2			5725.000	50.847	12.857	-3.153	54.000	37.990	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2015/01/02 - 13:50
Limit: FCC_Part15.209_RE(3m)	Engineer: Roy Cheng
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Wireless LAN Access Point	Power: AC 120V/60Hz
Test Mode: Transmit at channel 5745MHz by 802.11n-HT20 Ant 2	

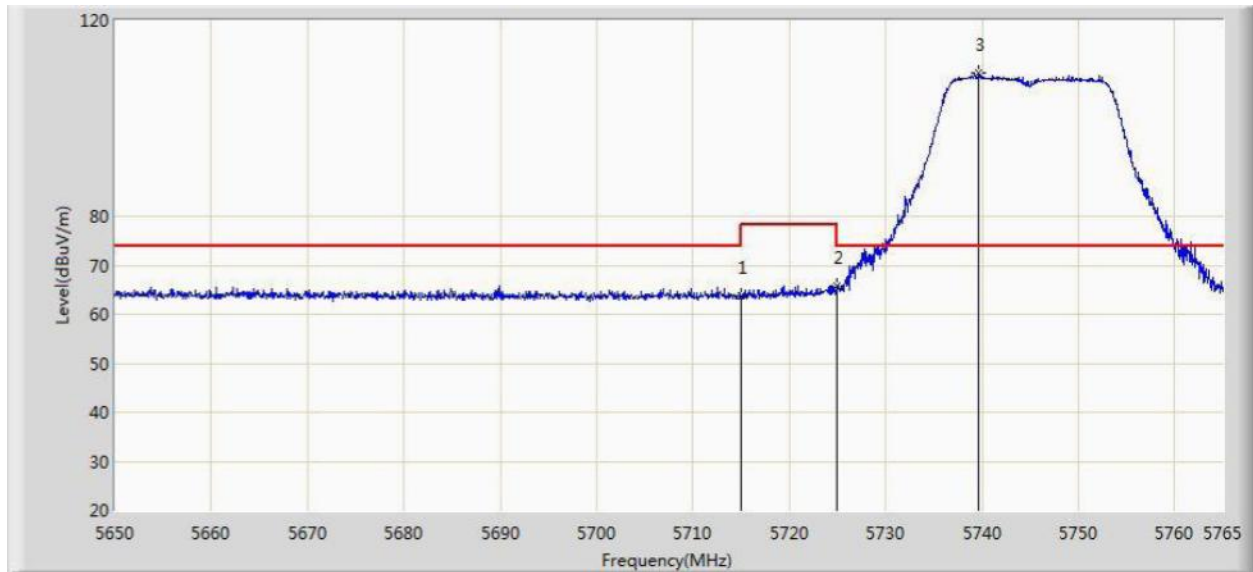


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5715.000	63.734	25.785	-10.266	74.000	37.949	PK
2			5725.000	65.745	27.755	-12.455	78.200	37.990	PK
3		*	5739.700	109.152	71.102	N/A	N/A	38.050	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2015/01/02 - 13:51
Limit: FCC_Part15.209_RE(3m)	Engineer: Roy Cheng
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Wireless LAN Access Point	Power: AC 120V/60Hz
Test Mode: Transmit at channel 5745MHz by 802.11n-HT20 Ant 2	

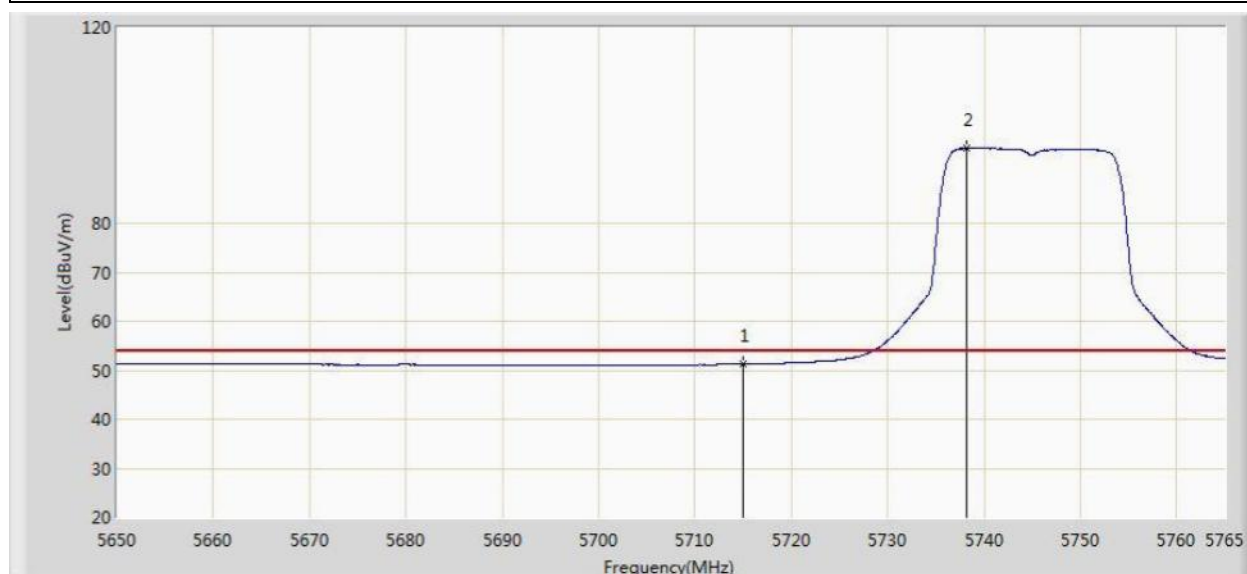


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5715.000	51.260	13.311	-2.740	54.000	37.949	AV
2		*	5738.205	95.355	57.311	N/A	N/A	38.045	AV

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2015/01/02 - 13:52
Limit: FCC_Part15.209_RE(3m)	Engineer: Roy Cheng
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Wireless LAN Access Point	Power: AC 120V/60Hz
Test Mode: Transmit at channel 5745MHz by 802.11n-HT20 Ant 2	

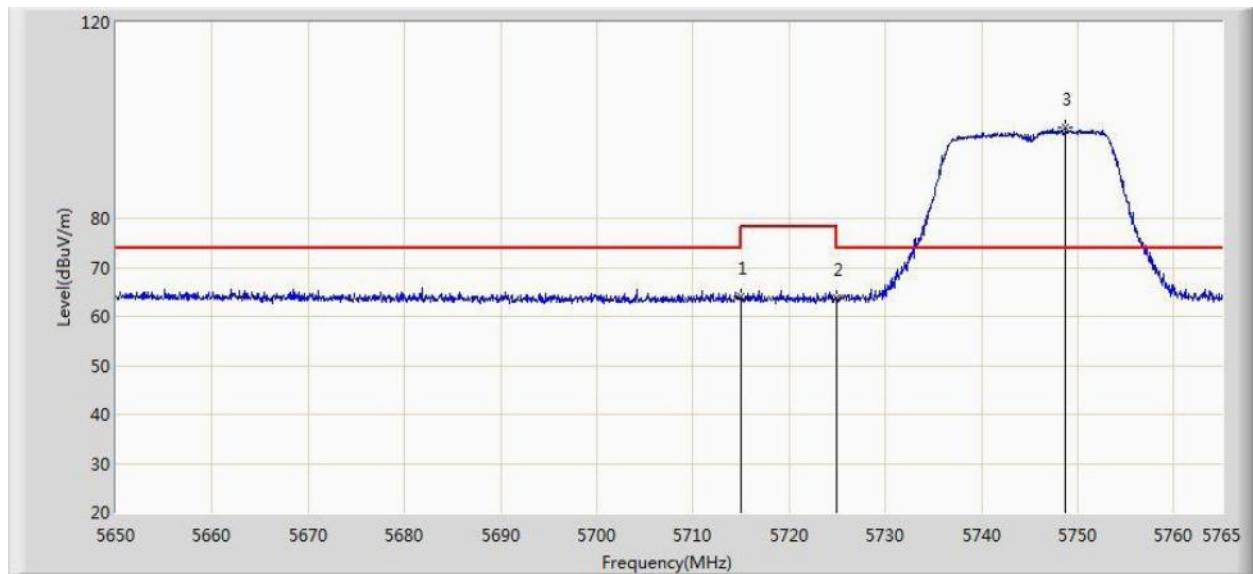


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5715.000	63.915	25.966	-10.085	74.000	37.949	PK
2			5725.000	63.681	25.691	-14.519	78.200	37.990	PK
3		*	5748.728	98.428	60.338	N/A	N/A	38.090	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2015/01/02 - 13:53
Limit: FCC_Part15.209_RE(3m)	Engineer: Roy Cheng
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Wireless LAN Access Point	Power: AC 120V/60Hz
Test Mode: Transmit at channel 5745MHz by 802.11n-HT20 Ant 2	

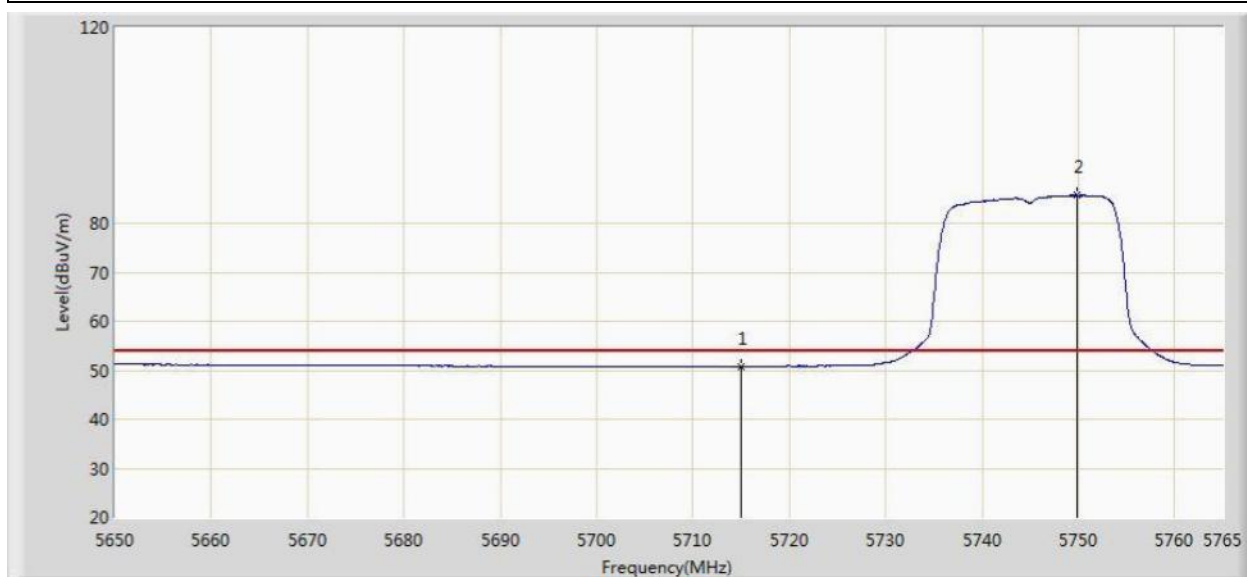


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5715.000	50.808	12.859	-3.192	54.000	37.949	AV
2		*	5749.877	85.688	47.593	N/A	N/A	38.095	AV

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2015/01/02 - 13:54
Limit: FCC_Part15.209_RE(3m)	Engineer: Roy Cheng
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Wireless LAN Access Point	Power: AC 120V/60Hz
Test Mode: Transmit at channel 5825MHz by 802.11n-HT20 Ant 2	

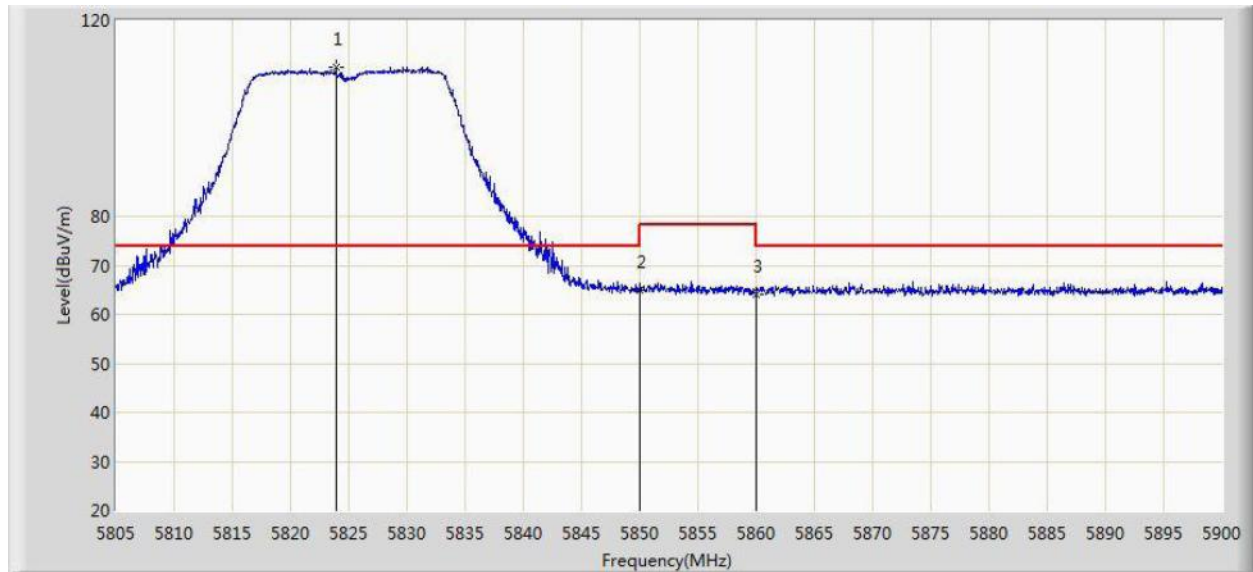


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5823.905	110.297	71.946	N/A	N/A	38.351	PK
2			5850.000	64.908	26.455	-13.292	78.200	38.454	PK
3			5860.000	64.162	25.684	-9.838	74.000	38.478	PK

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2015/01/02 - 13:56
Limit: FCC_Part15.209_RE(3m)	Engineer: Roy Cheng
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Wireless LAN Access Point	Power: AC 120V/60Hz
Test Mode: Transmit at channel 5825MHz by 802.11n-HT20 Ant 2	

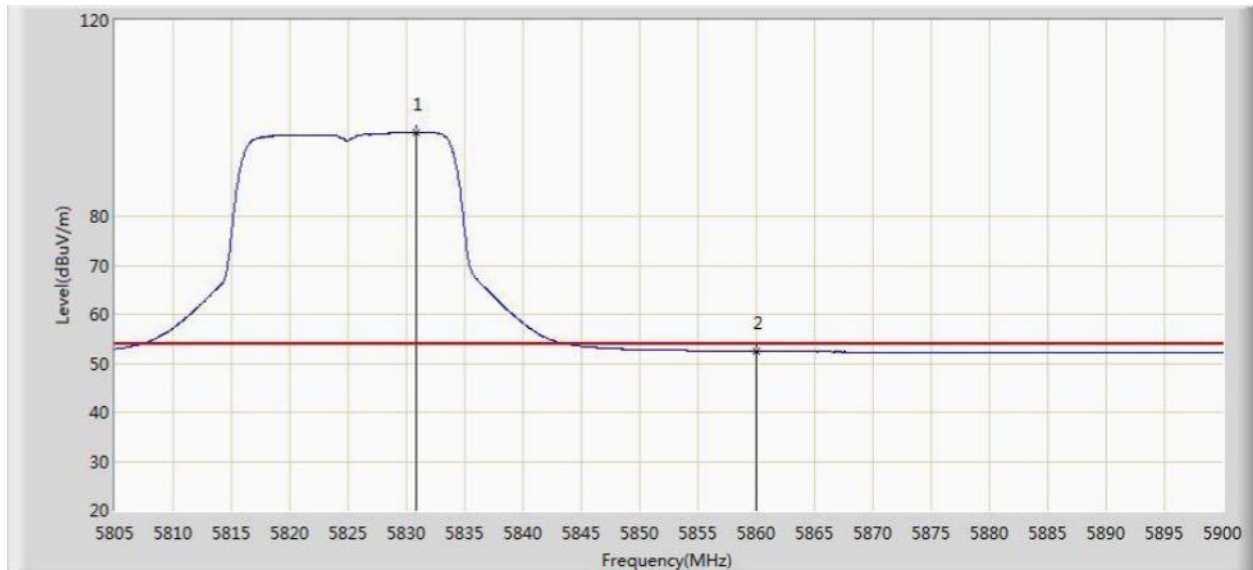


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5830.888	97.175	58.794	N/A	N/A	38.381	AV
2			5860.000	52.399	13.921	-1.601	54.000	38.478	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2015/01/02 - 13:56
Limit: FCC_Part15.209_RE(3m)	Engineer: Roy Cheng
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Wireless LAN Access Point	Power: AC 120V/60Hz
Test Mode: Transmit at channel 5825MHz by 802.11n-HT20 Ant 2	

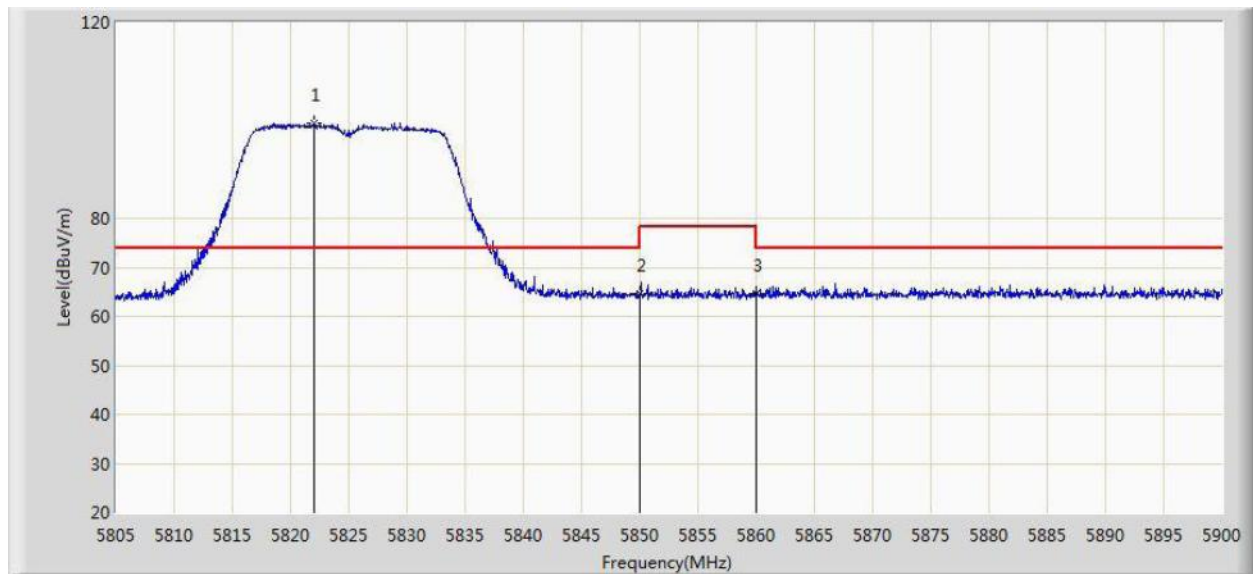


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5822.053	99.431	61.088	N/A	N/A	38.343	PK
2			5850.000	64.539	26.086	-13.661	78.200	38.454	PK
3			5860.000	64.567	26.089	-9.433	74.000	38.478	PK

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2015/01/02 - 13:59
Limit: FCC_Part15.209_RE(3m)	Engineer: Roy Cheng
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Wireless LAN Access Point	Power: AC 120V/60Hz
Test Mode: Transmit at channel 5825MHz by 802.11n-HT20 Ant 2	

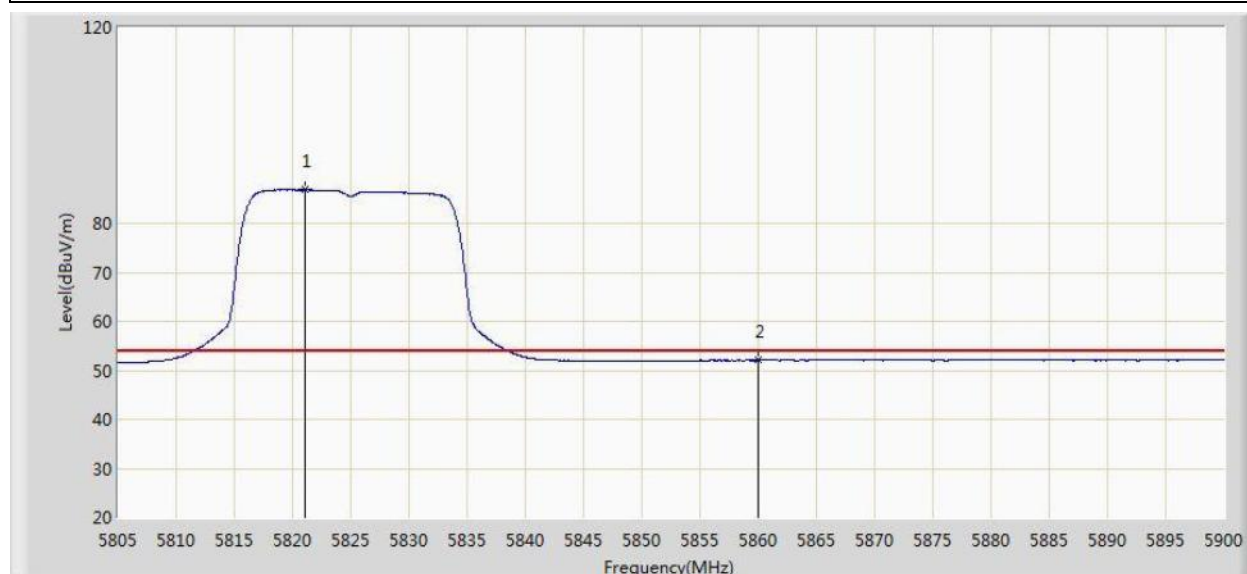


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5821.055	86.813	48.474	N/A	N/A	38.340	AV
2			5860.000	52.060	13.582	-1.940	54.000	38.478	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2015/01/02 - 14:04
Limit: FCC_Part15.209_RE(3m)	Engineer: Roy Cheng
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Wireless LAN Access Point	Power: AC 120V/60Hz
Test Mode: Transmit at channel 5190MHz by 802.11n-HT40 Ant 2	

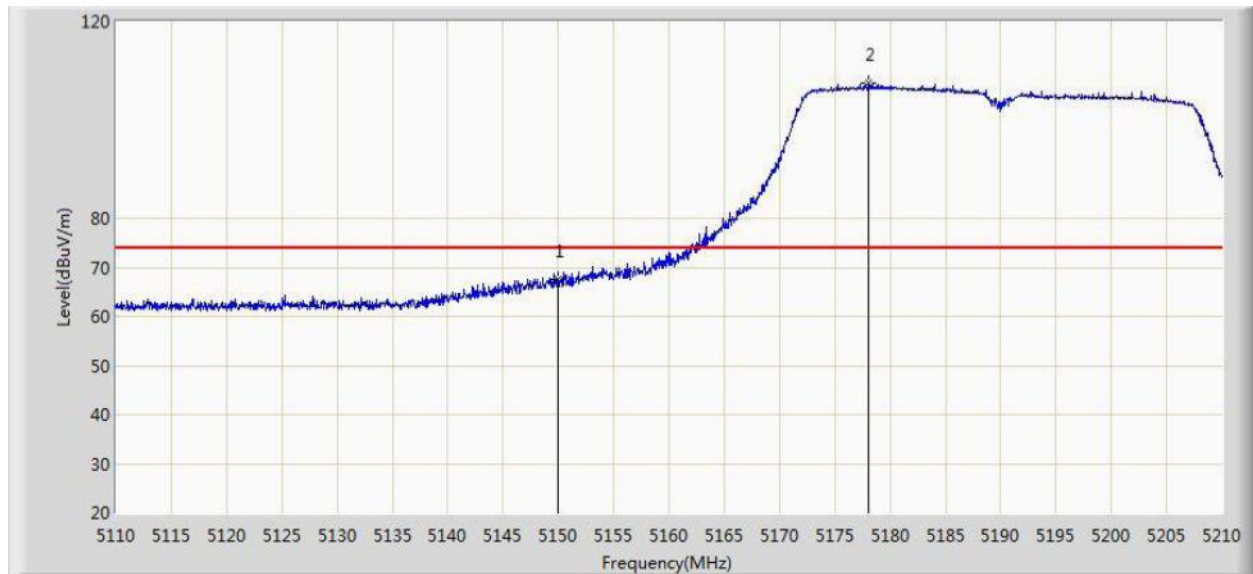


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5150.000	67.519	30.067	-6.481	74.000	37.452	PK
2		*	5178.050	107.527	70.149	N/A	N/A	37.378	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2015/01/02 - 14:03
Limit: FCC_Part15.209_RE(3m)	Engineer: Roy Cheng
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Wireless LAN Access Point	Power: AC 120V/60Hz
Test Mode: Transmit at channel 5190MHz by 802.11n-HT40 Ant 2	

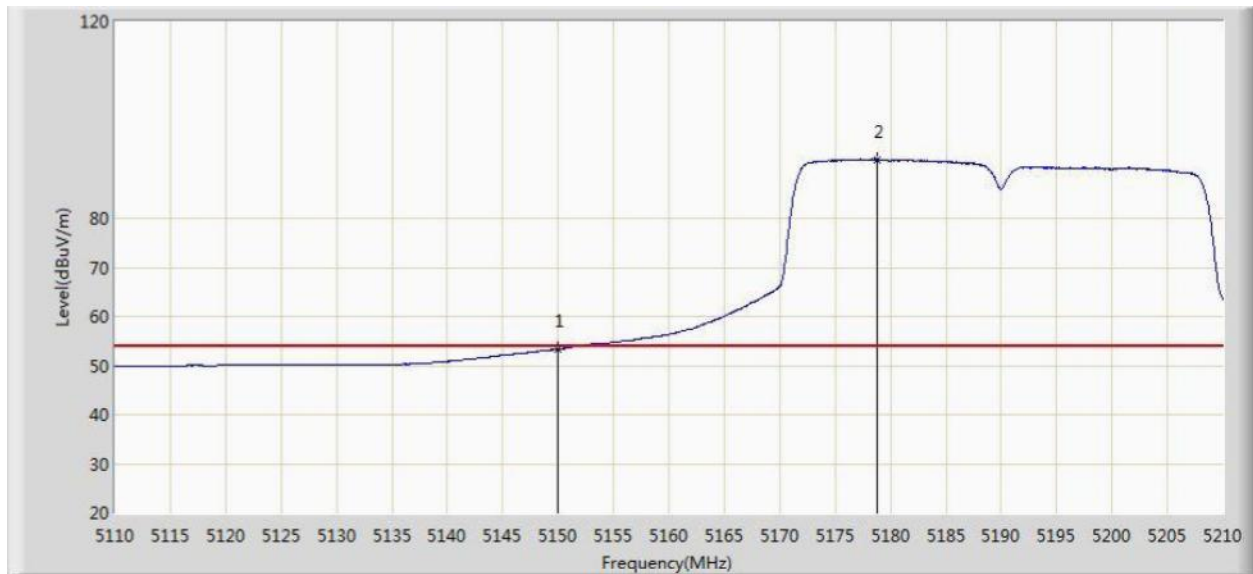

No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5150.000	53.335	15.883	-0.665	54.000	37.452	AV
2		*	5178.850	91.983	54.607	N/A	N/A	37.376	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)