

FCC Test Report

FCC ID: QISBG2-W09

Project No. : 1701C220
Equipment : HUAWEI MediaPad T3 7.0 (MediaPad T3 7.0 for short)
Model Name : BG2-W09
Applicant : Huawei Technologies Co., Ltd.
Address : Administration Building, Headquarters of Huawei Technologies Co., Ltd., Bantian, Longgang District, Shenzhen, 518129, P.R.C


Date of Receipt : Jan. 23, 2017
Date of Test : Jan. 23, 2017 ~ Feb. 17, 2017
Issued Date : Feb. 20, 2017
Tested by : BTL Inc.

Testing Engineer :



(Kevin Li)

Technical Manager :



(Bill Zhang)

Authorized Signatory :



(Steven Lu)

B T L I N C .

No.3, Jinshagang 1st Road, Shixia, Dalang Town, Dongguan,
Guangdong, China.

TEL: +86-769-8318-3000 FAX: +86-769-8319-6000



Declaration

BTL represents to the client that testing is done in accordance with standard procedures as applicable and that test instruments used has been calibrated with standards traceable to international standard(s) and/or national standard(s).

BTL's reports apply only to the specific samples tested under conditions. It is manufacture's responsibility to ensure that additional production units of this model are manufactured with the identical electrical and mechanical components. **BTL** shall have no liability for any declarations, inferences or generalizations drawn by the client or others from **BTL** issued reports.

BTL's report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the Federal Government.

This report is the confidential property of the client. As a mutual protection to the clients, the public and **BTL-self**, extracts from the test report shall not be reproduced except in full with **BTL's** authorized written approval.

BTL's laboratory quality assurance procedures are in compliance with the **ISO Guide 17025** requirements, and accredited by the conformity assessment authorities listed in this test report.

Limitation

For the use of the authority's logo is limited unless the Test Standard(s)/Scope(s)/Item(s) mentioned in this test report is (are) included in the conformity assessment authorities acceptance respective.

Table of Contents	Page
REPORT ISSUED HISTORY	4
1 . CERIFICATION	5
2 . SUMMARY OF TEST RESULTS	6
2.1 TEST FACILITY	7
2.2 MEASUREMENT UNCERTAINTY	7
3 . GENERAL INFORMATION	8
3.1 GENERAL DESCRIPTION OF EUT	8
3.2 DESCRIPTION OF TEST MODES	9
3.3 EUT OPERATING CONDITIONS	10
3.4 BLOCK DIAGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED	10
3.5 DESCRIPTION OF SUPPORT UNITS	11
4 . EMC EMISSION TEST	12
4.1 CONDUCTED EMISSION MEASUREMENT	12
4.1.1 POWER LINE CONDUCTED EMISSION	12
4.1.2 MEASUREMENT INSTRUMENTS LIST	12
4.1.3 TEST PROCEDURE	13
4.1.4 DEVIATION FROM TEST STANDARD	13
4.1.5 TEST SETUP	13
4.1.6 TEST RESULTS	13
4.2 RADIATED EMISSION MEASUREMENT	32
4.2.1 LIMITS OF RADIATED EMISSION MEASUREMENT	32
4.2.2 MEASUREMENT INSTRUMENTS LIST	33
4.2.3 TEST PROCEDURE	34
4.2.4 DEVIATION FROM TEST STANDARD	34
4.2.5 TEST SETUP	35
4.2.6 TEST RESULTS-BELOW 1GHZ	36
4.2.7 TEST RESULTS-ABOVE 1GHZ	55

REPORT ISSUED HISTORY

Issued No.	Description	Issued Date
BTL-FCCE-1-1701C220	Original Issue.	Feb. 20, 2017

1. CERIFICATION

Equipment : HUAWEI MediaPad T3 7.0 (MediaPad T3 7.0 for short)
Brand Name : HUAWEI
Model Name : BG2-W09
Applicant : Huawei Technologies Co., Ltd.
Manufacturer : Huawei Technologies Co., Ltd.
Address : Administration Building, Headquarters of Huawei Technologies Co., Ltd.,
Bantian, Longgang District, Shenzhen, 518129, P.R.C
Factory : Huawei Technologies Co., Ltd.
Address : Administration Building, Headquarters of Huawei Technologies Co., Ltd.,
Bantian, Longgang District, Shenzhen, 518129, P.R.C
Date of Test : Jan. 23, 2017 ~ Feb. 17, 2017
Test Sample : Engineering Sample
Standard(s) : FCC Part 15, Subpart B
ANSI C63.4-2014

The above equipment has been tested and found compliance with the requirement of the relative standards by BTL Inc.

The test data, data evaluation, and equipment configuration contained in our test report (Ref No. BTL-FCCE-1-1701C220) were obtained utilizing the test procedures, test instruments, test sites that has been accredited by the Authority of TAF according to the ISO-17025 quality assessment standard and technical standard(s).

2. SUMMARY OF TEST RESULTS

Test procedures according to the technical standard(s):

EMC Emission				
Standard(s)	Test Item	Limit	Judgment	Remark
FCC Part15, Subpart B ANSI C63.4-2014	Conducted Emission	Class B	PASS	
	Radiated emission Below 1 GHz	Class B	PASS	
	Radiated emission Above 1 GHz	Class B	PASS	NOTE(2)

NOTE:

- (1) " N/A" denotes test is not applicable to this device.
- (2) The EUT's max operating frequency exceeds 108 MHz, so the test will be performed.

2.1 TEST FACILITY

The test facilities used to collect the test data in this report at the location of No.3, Jinshagang 1st Road, Shixia, Dalang Town, Dongguan, Guangdong, China.

2.2 MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2. The BTL measurement uncertainty is less than the CISPR 16-4-2 U_{CISPR} requirement.

The reported uncertainty of measurement $y \pm U$, where expanded uncertainty U is based on a standard uncertainty multiplied by a coverage factor of $k=2$, providing a level of confidence of approximately 95%.

A. Conducted Measurement :

Test Site	Method	Measurement Frequency Range	U, (dB)
DG-C02	CISPR	150 kHz ~ 30MHz	2.32

B. Radiated Measurement :

Test Site	Method	Measurement Frequency Range	Ant. H / V	U, (dB)
DG-CB03 (3m)	CISPR	9KHz ~ 30MHz	V	3.79
		9KHz ~ 30MHz	H	3.57
		30MHz ~ 200MHz	V	3.82
		30MHz ~ 200MHz	H	3.78
		200MHz ~ 1,000MHz	V	4.10
		200MHz ~ 1,000MHz	H	4.06

Test Site	Method	Measurement Frequency Range	Ant. H / V	U, (dB)
DG-CB03 (3m)	CISPR	1GHz ~ 18GHz	V	3.12
		1GHz ~ 18GHz	H	3.68
		1GHz ~ 18GHz	V	3.12
		1GHz ~ 18GHz	H	3.68

Test Site	Method	Measurement Frequency Range	Ant. H / V	U, (dB)
DG-CB03 (1m)	CISPR	18GHz ~ 40GHz	V	4.15
		18GHz ~ 40GHz	H	4.14

Note: Unless specifically mentioned, the uncertainty of measurement has not been taken into account to declare the compliance or non-compliance to the specification.

3. GENERAL INFORMATION

3.1 GENERAL DESCRIPTION OF EUT

Equipment	HUAWEI MediaPad T3 7.0 (MediaPad T3 7.0 for short)		
Brand Name	HUAWEI		
Model Name	BG2-W09		
Model Difference	N/A		
Operation Frequency	Mode	Transmit Frequency (MHz)	Receive Frequency (MHz)
	GPS	/	1570~1580
	Bluetooth	2402-2480	
	WIFI -2.4G	2412-2462	
	WIFI-5G	5150-5250/5250-5350/5470-5725/5725-5850	
Power Source	#1 DC voltage supplied from adapter. #2 Supplied from battery.		
Power Rating	#1 ~100V~240V~ #2 DC 3.8V 3000mAh		
HW Version	SH1BG2W09LM		
SW Version	BG2-W09C128B001T01-log		

Note:

- For a more detailed features description, please refer to the manufacturer's specifications or the user's manual.
- The EUT contains following accessory devices:

Item	Mfr/Brand	Model.
Battery	Sunwoda Electronic Co., LTD	HB396481EBC
Earphone	JIANGXI LIANCHUANG HONGSHENG ELECTRONIC CO., LTD	22040150
	BOLUO COUNTY QUANCHENG ELECTRONIC CO., LTD	22040150
	Goer Tek Inc	22040150
USB Cable	Shenzhen Luxshare Precision Industry Co.,Ltd.	L99U2017-CS-H
	FOXCONN INTERCONNECT TECHNOLOGY LIMITED	CUBB01M-HC304-DH
	HONGLIN TECHNOLOGY CO.,LTD	130-26988
Adapter	DONGGUAN PHITEK ELECTRONICS CO.,LTD.	HW-050100U01
	SHENZHEN HUNTKEY ELECTRONIC CO.,LTD.	HW-050100A01
	HUIZHOU BYD ELECTRONIC CO., LTD.	HW-050100E01
		HW-050100B01

3.2 DESCRIPTION OF TEST MODES

To investigate the maximum EMI emission characteristics generated from EUT, the test system was pre-scanning tested base on the consideration of following EUT operation mode or test configuration mode which possible have effect on EMI emission level. Each of these EUT operation mode(s) or test configuration mode(s) mentioned above was evaluated respectively.

Pretest Mode	Description
Mode 1	USB copy(EUT with PC)+Earphone
Mode 2	Adapter+Earphone+Camera on+2.4G WiFi+GPS+Bluetooth
Mode 3	Adapter+Earphone+Camera on+5G WiFi+GPS+Bluetooth
Mode 4	Adapter+Earphone+Playing
Mode 5	Adapter+Speaker+Playing

For Conducted Test	
Final Test Mode	Description
Mode 1	USB copy(EUT with PC)+Earphone
Mode 2	Adapter+Earphone+Camera on+2.4G WiFi+GPS+Bluetooth
Mode 3	Adapter+Earphone+Camera on+5G WiFi+GPS+Bluetooth
Mode 4	Adapter+Earphone+Playing
Mode 5	Adapter+Speaker+Playing


For Radiated Test	
Final Test Mode	Description
Mode 1	USB copy(EUT with PC)+Earphone
Mode 2	Adapter+Earphone+Camera on+2.4G WiFi+GPS+Bluetooth
Mode 3	Adapter+Earphone+Camera on+5G WiFi+GPS+Bluetooth
Mode 4	Adapter+Earphone+Playing
Mode 5	Adapter+Speaker+Playing

3.3 EUT OPERATING CONDITIONS

The EUT exercise program used during radiated and/or conducted emission measurement was designed to exercise the various system components in a manner similar to a typical use.

3.4 BLOCK DIAGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED

Mode 1

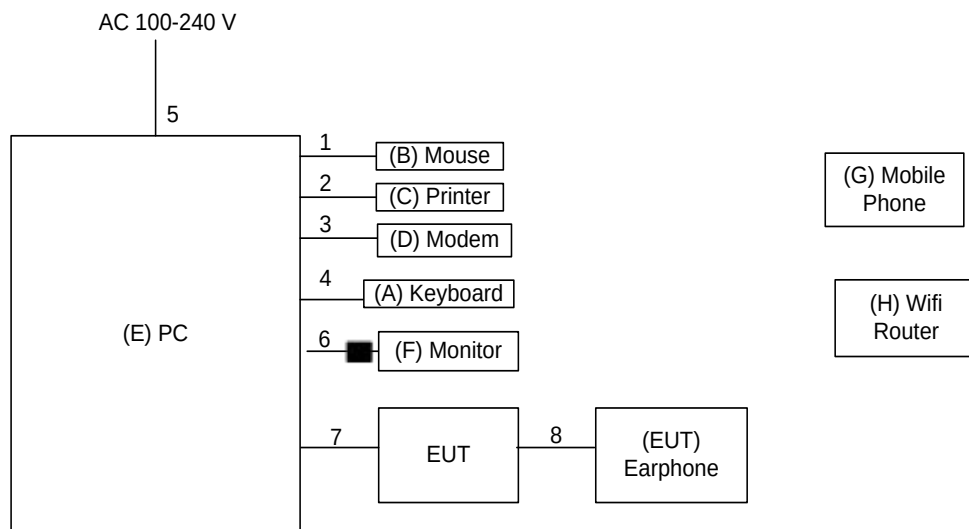


Ground plane

Remote System

■ Ferrite core

Mode 2~5

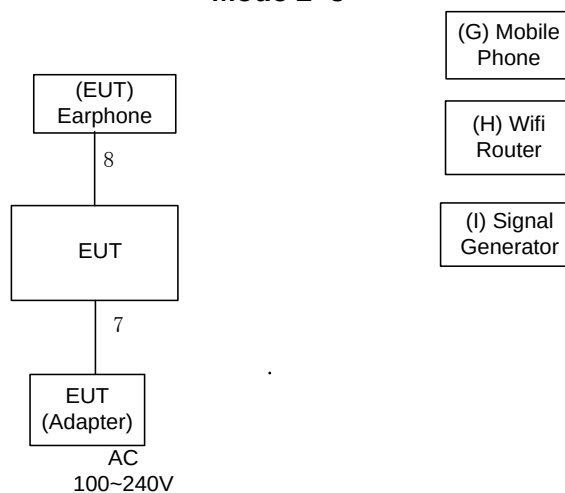

Ground plane

Remote System

3.5 DESCRIPTION OF SUPPORT UNITS

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

Item	Equipment	Mfr/Brand	Model/Type No.	FCC ID	Series No.
A	USB Keyboard	Dell	L100	DOC	CNORH6596589071T08NE
B	USB Mouse	Dell	MO56UOA	DOC	FQJ000BS
C	Printer	SII	DPU-414	DOC	3018507 B
D	Modem	ACEEX	DM-1414V	IFAXDM1414	0603002131
E	PC	Dell	DCSM 745	DOC	G7K832X
F	LCD monitor	Dell	E177FPc	DOC	CNOFJ179-64180-6AG-1WNS
G	Mobile phone	samsung	SGH-1747	A3LSGH1747	R31C208VLDB
H	Wireless Router	ASUS	RT-AC66U	MSQ-RTAC66U	E8ICGG000138
I	Signal Generator	Agilent	E4438C	N/A	MY49071316

Item	Shielded Type	Ferrite Core	Length	Note
1	YES	NO	1.8m	USB Cable
2	YES	NO	1.5m	Parallel Cable
3	YES	NO	1.5m	RS232 Cable
4	YES	NO	1.8m	USB Cable
5	NO	NO	1.8m	AC power Cable
6	YES	YES	1.8m	D-SUB Cable
7	YES	NO	1m	USB Cable
8	NO	NO	1.2m	Earphone Cable

4. EMC EMISSION TEST

4.1 CONDUCTED EMISSION MEASUREMENT

4.1.1 POWER LINE CONDUCTED EMISSION (FREQUENCY RANGE 150KHZ-30MHZ)

FREQUENCY (MHz)	Class A (dBuV)		Class B (dBuV)	
	Quasi-peak	Average	Quasi-peak	Average
0.15 -0.5	79.00	66.00	66 - 56 *	56 - 46 *
0.50 -5.0	73.00	60.00	56.00	46.00
5.0 -30.0	73.00	60.00	60.00	50.00

Note:

- (1) The tighter limit applies at the band edges.
- (2) The limit of " * " marked band means the limitation decreases linearly with the logarithm of the frequency in the range.
- (3) The test result calculated as following:
 Measurement Value = Reading Level + Correct Factor
 Correct Factor = Insertion Loss + Cable Loss + Attenuator Factor(if use)
 Margin Level = Measurement Value - Limit Value

4.1.2 MEASUREMENT INSTRUMENTS LIST

Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Measurement Software	Farad	EZ-EMC Ver.NB-03A 1-01	N/A	N/A
2	LISN	EMCO	3816/2	00052765	Mar. 27, 2017
3	50Ω Terminator	SHX	TF2-3G-A	08122901	Mar. 27, 2017
4	TWO-LINE V-NETWORK	R&S	ENV216	101447	Mar. 27, 2017
5	Cable	emci	RG223(9K Hz-30MHz) (5m)	N/A	Mar. 10, 2017
6	EMI Test Receiver	R&S	ESCI	100382	Mar. 27, 2017

Remark: "N/A" denotes no model name, serial no. or calibration specified.

All calibration period of equipment list is one year.


4.1.3 TEST PROCEDURE

- The EUT was placed 0.8 meters from the horizontal ground plane with EUT being connected to the power mains through a line impedance stabilization network (LISN). All other support equipment powered from additional LISN(s). The LISN provide 50 Ohm/ 50uH of coupling impedance for the measuring instrument.
- Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.
- I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
- LISN at least 80 cm from nearest part of EUT chassis.
- For the actual test configuration, please refer to the related Item –EUT Test Photos.
- First the whole spectrum of emission caused by equipment under test(EUT) is recorded with Detector set to peak. Peak value recorded in table if the margin from QP Limit is larger than 2dB,otherwise,QP value is recorded, Measuring frequency range from 150KHz to 30MHz.

4.1.4 DEVIATION FROM TEST STANDARD

No deviation

4.1.5 TEST SETUP

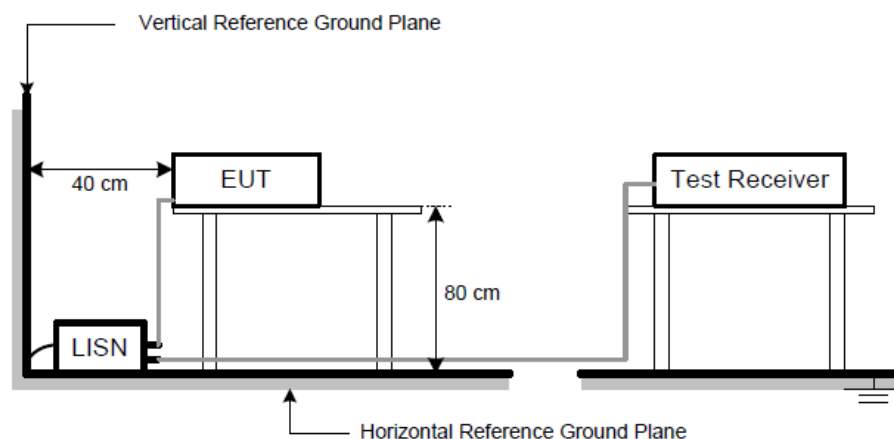


4.1.6 TEST RESULTS

Remark

- Reading in which marked as QP means measurements by using are Quasi-Peak Mode with Detector BW=9KHz; SPA setting in RBW=10KHz,VBW =10KHz, Swp. Time = 0.3 sec./MHz. Reading in which marked as AV means measurements by using are Average Mode with instrument setting in RBW=10KHz,VBW=10KHz, Swp. Time =0.3 sec./MHz.
- All readings are QP Mode value unless otherwise stated AVG in column of 『Note』. If the QP Mode Measured value compliance with the QP Limits and lower than AVG Limits, the EUT shall be deemed to meet both QP & AVG Limits and then only QP Mode was measured, but AVG Mode didn't perform. In this case, a “ * ” marked in AVG Mode column of Interference Voltage Measured.

EUT	HUAWEI MediaPad T3 7.0 (MediaPad T3 7.0 for short)	Model Name	BG2-W09
Temperature	24°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz	Phase	Line
Test Mode	USB copy(EUT with PC)+earphone		
Note	USB Cable:Luxshare+Earphone:LIANCHUANG		
Test Engineer	Kevin Li		


80 dBuV

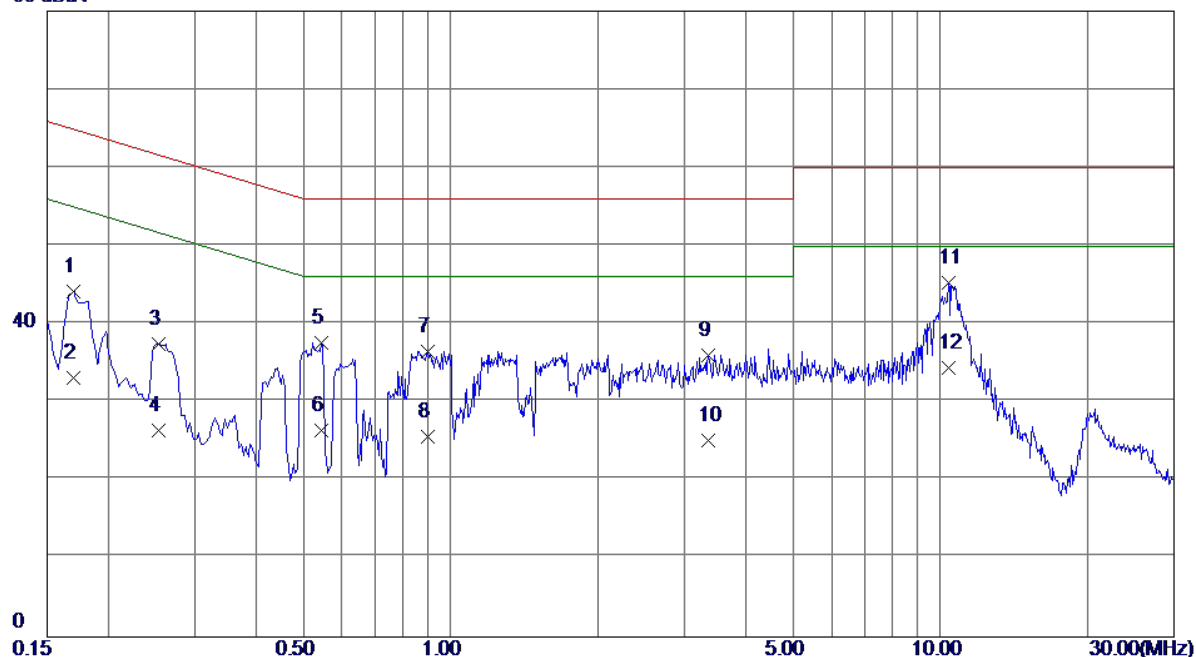

No.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure ment dBuV	Limit dBuV	Margin dB	Detector
1	0.1700	34.66	9.57	44.23	64.96	-20.73	QP
2	0.1700	23.60	9.57	33.17	54.96	-21.79	AVG
3	0.2540	27.93	9.57	37.50	61.63	-24.13	QP
4	0.2540	16.80	9.57	26.37	51.63	-25.26	AVG
5	0.5460	27.96	9.69	37.65	56.00	-18.35	QP
6	0.5460	16.70	9.69	26.39	46.00	-19.61	AVG
7	0.8980	26.66	9.83	36.49	56.00	-19.51	QP
8	0.8980	15.70	9.83	25.53	46.00	-20.47	AVG
9	3.3660	25.71	10.31	36.02	56.00	-19.98	QP
10	3.3660	14.80	10.31	25.11	46.00	-20.89	AVG
11 *	10.3860	34.79	10.51	45.30	60.00	-14.70	QP
12	10.3860	23.90	10.51	34.41	50.00	-15.59	AVG

EUT	HUAWEI MediaPad T3 7.0 (MediaPad T3 7.0 for short)	Model Name	BG2-W09
Temperature	24°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz	Phase	Neutral
Test Mode	USB copy(EUT with PC)+earphone		
Note	USB Cable:Luxshare+Earphone:LIANCHUANG		
Test Engineer	Kevin Li		


80 dBuV

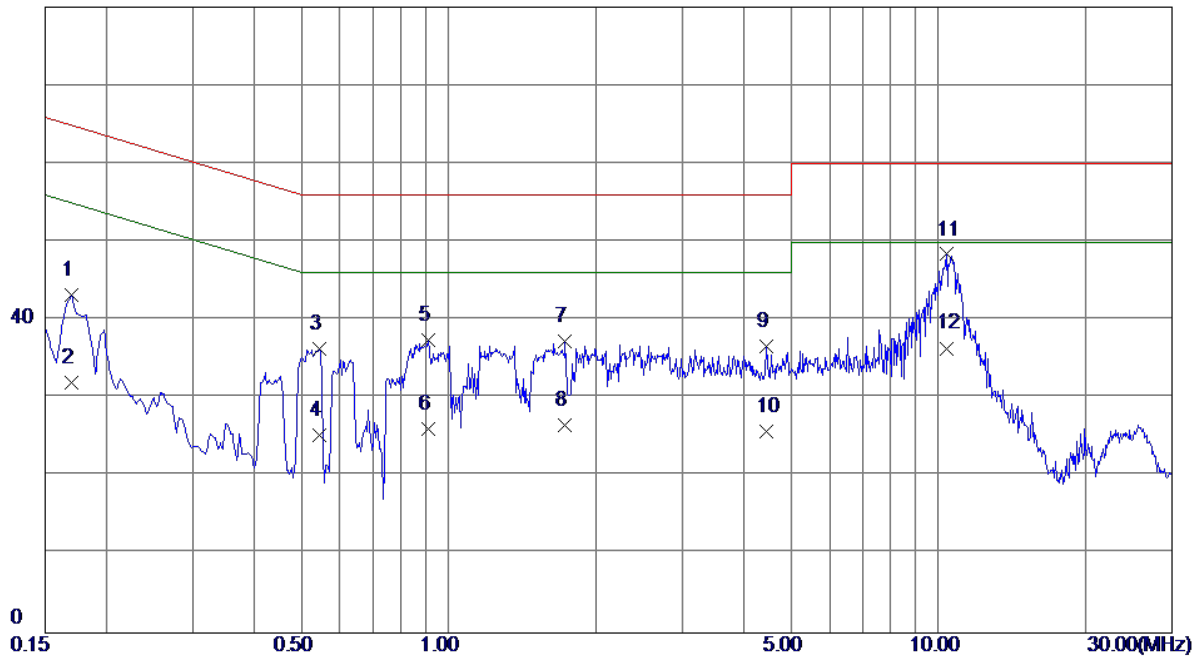

No.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure ment dBuV	Limit dBuV	Margin dB	Detector
1	0.1700	33.68	9.47	43.15	64.96	-21.81	QP
2	0.1700	22.50	9.47	31.97	54.96	-22.99	AVG
3	0.5460	26.86	9.49	36.35	56.00	-19.65	QP
4	0.5460	15.80	9.49	25.29	46.00	-20.71	AVG
5	0.9100	27.64	9.73	37.37	56.00	-18.63	QP
6	0.9100	16.40	9.73	26.13	46.00	-19.87	AVG
7	1.7300	27.52	9.79	37.31	56.00	-18.69	QP
8	1.7300	16.80	9.79	26.59	46.00	-19.41	AVG
9	4.4580	26.44	10.16	36.60	56.00	-19.40	QP
10	4.4580	15.60	10.16	25.76	46.00	-20.24	AVG
11 *	10.3860	37.80	10.60	48.40	60.00	-11.60	QP
12	10.3860	25.80	10.60	36.40	50.00	-13.60	AVG

EUT	HUAWEI MediaPad T3 7.0 (MediaPad T3 7.0 for short)	Model Name	BG2-W09
Temperature	24°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz	Phase	Line
Test Mode	USB copy(EUT with PC)+earphone		
Note	USB Cable:FOXCONN+Earphone:QUANCHENG		
Test Engineer	Kevin Li		


80 dBuV

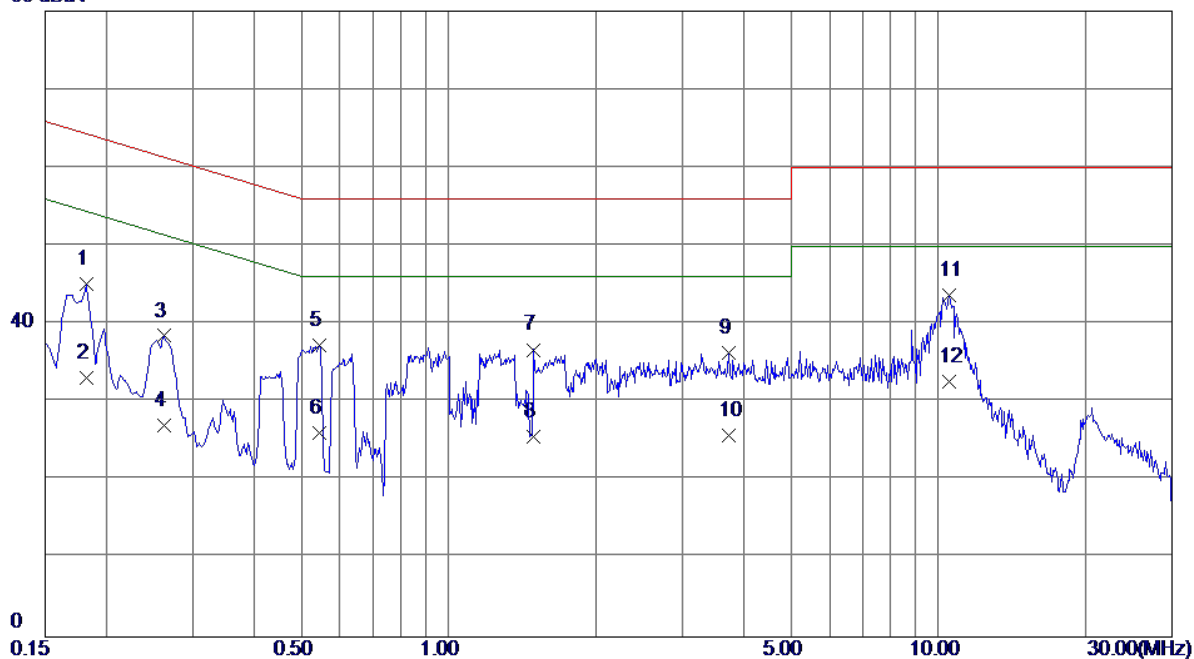

No.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure ment dBuV	Limit dBuV	Margin dB	Detector
1	0.1819	35.61	9.57	45.18	64.40	-19.22	QP
2	0.1819	23.50	9.57	33.07	54.40	-21.33	AVG
3	0.2620	28.91	9.57	38.48	61.37	-22.89	QP
4	0.2620	17.50	9.57	27.07	51.37	-24.30	AVG
5	0.5460	27.62	9.69	37.31	56.00	-18.69	QP
6	0.5460	16.40	9.69	26.09	46.00	-19.91	AVG
7	1.4900	26.75	9.97	36.72	56.00	-19.28	QP
8	1.4900	15.70	9.97	25.67	46.00	-20.33	AVG
9	3.7300	26.02	10.35	36.37	56.00	-19.63	QP
10	3.7300	15.40	10.35	25.75	46.00	-20.25	AVG
11 *	10.5260	33.22	10.51	43.73	60.00	-16.27	QP
12	10.5260	22.20	10.51	32.71	50.00	-17.29	AVG

EUT	HUAWEI MediaPad T3 7.0 (MediaPad T3 7.0 for short)	Model Name	BG2-W09
Temperature	24°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz	Phase	Neutral
Test Mode	USB copy(EUT with PC)+earphone		
Note	USB Cable:FOXCONN+Earphone:QUANCHENG		
Test Engineer	Kevin Li		


80 dBuV

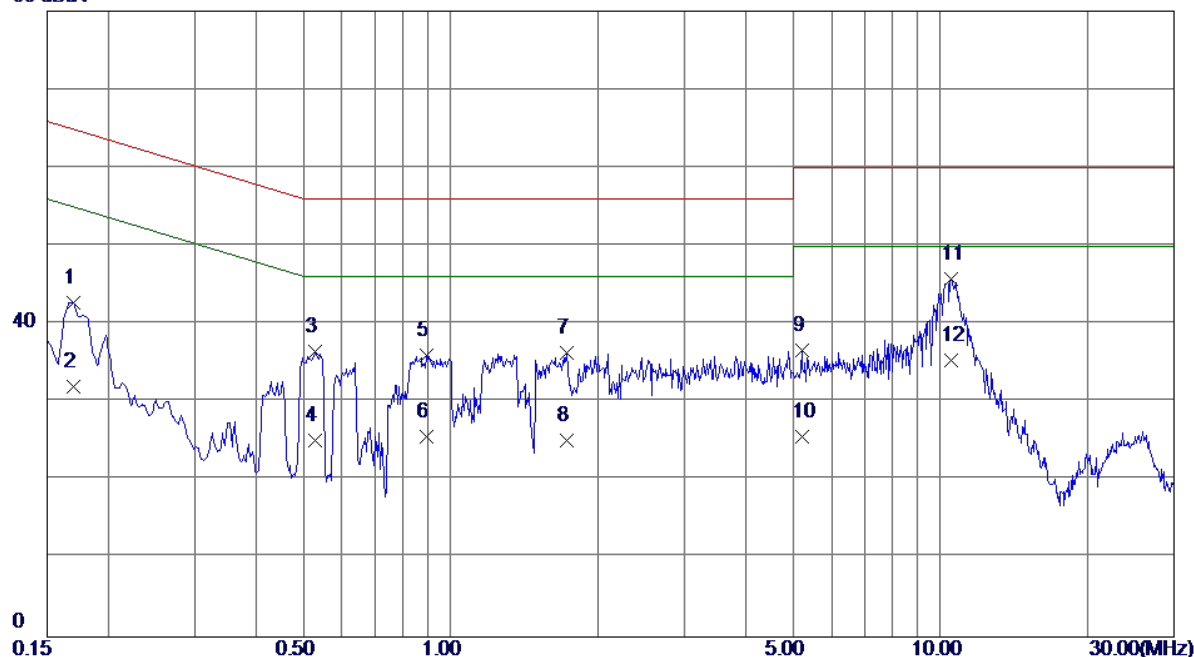

No.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure ment dBuV	Limit dBuV	Margin dB	Detector
1	0.1700	33.26	9.47	42.73	64.96	-22.23	QP
2	0.1700	22.50	9.47	31.97	54.96	-22.99	AVG
3	0.5299	26.92	9.49	36.41	56.00	-19.59	QP
4	0.5299	15.70	9.49	25.19	46.00	-20.81	AVG
5	0.8940	26.27	9.72	35.99	56.00	-20.01	QP
6	0.8940	15.90	9.72	25.62	46.00	-20.38	AVG
7	1.7300	26.59	9.79	36.38	56.00	-19.62	QP
8	1.7300	15.40	9.79	25.19	46.00	-20.81	AVG
9	5.2100	26.47	10.24	36.71	60.00	-23.29	QP
10	5.2100	15.30	10.24	25.54	50.00	-24.46	AVG
11 *	10.5219	35.12	10.60	45.72	60.00	-14.28	QP
12	10.5219	24.70	10.60	35.30	50.00	-14.70	AVG

EUT	HUAWEI MediaPad T3 7.0 (MediaPad T3 7.0 for short)	Model Name	BG2-W09
Temperature	24°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz	Phase	Line
Test Mode	USB copy(EUT with PC)+earphone		
Note	USB Cable:HONGLIN+Earphone:GoerTek		
Test Engineer	Kevin Li		


80 dBuV

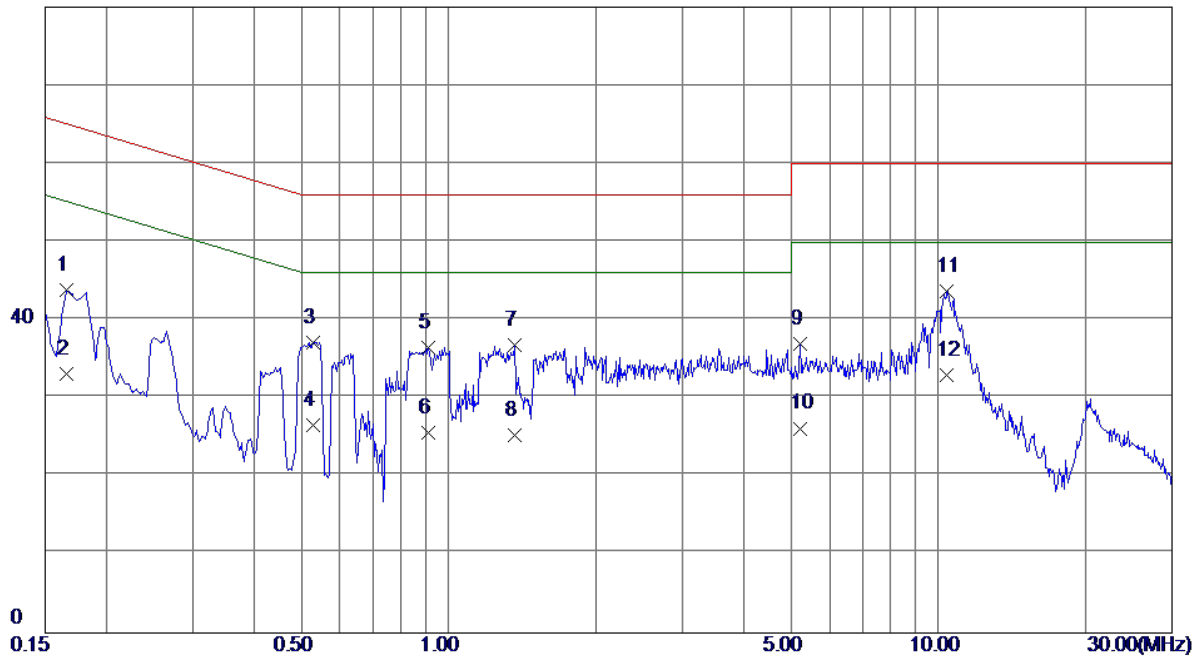

No.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure ment dBuV	Limit dBuV	Margin dB	Detector
1	0.1660	34.21	9.57	43.78	65.16	-21.38	QP
2	0.1660	23.50	9.57	33.07	55.16	-22.09	AVG
3	0.5299	27.43	9.69	37.12	56.00	-18.88	QP
4	0.5299	16.80	9.69	26.49	46.00	-19.51	AVG
5	0.9100	26.64	9.83	36.47	56.00	-19.53	QP
6	0.9100	15.70	9.83	25.53	46.00	-20.47	AVG
7	1.3660	26.81	9.92	36.73	56.00	-19.27	QP
8	1.3660	15.41	9.92	25.33	46.00	-20.67	AVG
9	5.2100	26.73	10.26	36.99	60.00	-23.01	QP
10	5.2100	15.90	10.26	26.16	50.00	-23.84	AVG
11 *	10.3979	33.20	10.51	43.71	60.00	-16.29	QP
12	10.3979	22.40	10.51	32.91	50.00	-17.09	AVG


EUT	HUAWEI MediaPad T3 7.0 (MediaPad T3 7.0 for short)	Model Name	BG2-W09
Temperature	24°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz	Phase	Neutral
Test Mode	USB copy(EUT with PC)+earphone		
Note	USB Cable:HONGLIN+Earphone:GoerTek		
Test Engineer	Kevin Li		

80 dBuV

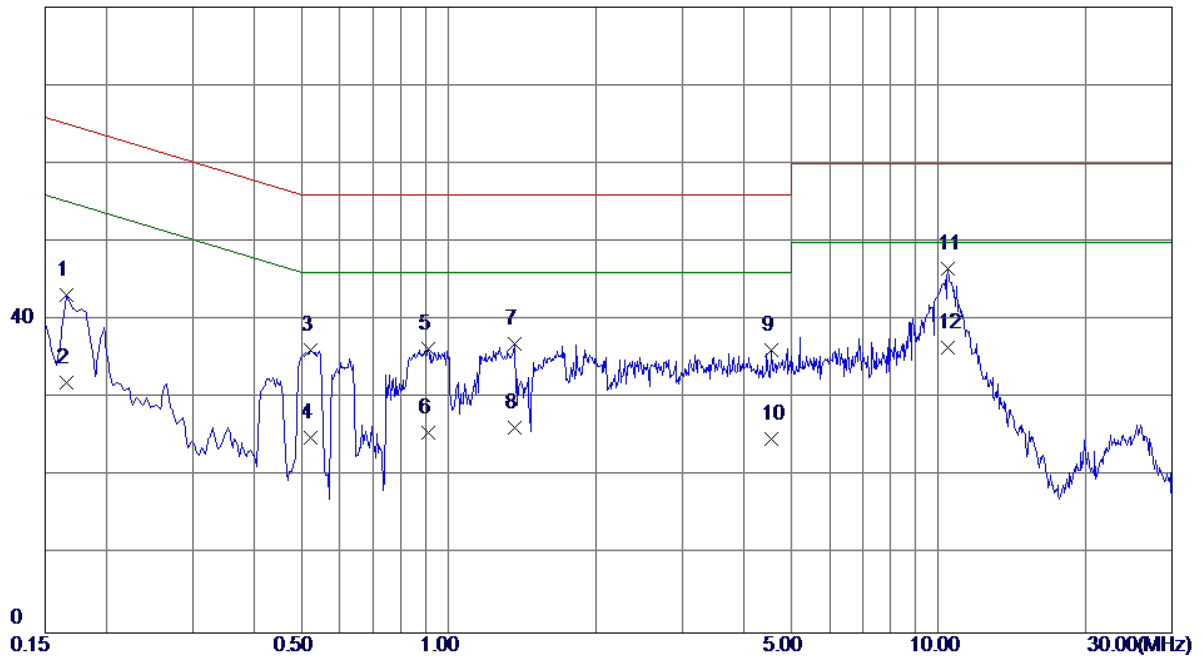


No.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure ment dBuV	Limit dBuV	Margin dB	Detector
1	0.1660	33.65	9.49	43.14	65.16	-22.02	QP
2	0.1660	22.50	9.49	31.99	55.16	-23.17	AVG
3	0.5220	26.60	9.49	36.09	56.00	-19.91	QP
4	0.5220	15.40	9.49	24.89	46.00	-21.11	AVG
5	0.9100	26.63	9.73	36.36	56.00	-19.64	QP
6	0.9100	15.80	9.73	25.53	46.00	-20.47	AVG
7	1.3660	27.22	9.77	36.99	56.00	-19.01	QP
8	1.3660	16.40	9.77	26.17	46.00	-19.83	AVG
9	4.5500	25.95	10.17	36.12	56.00	-19.88	QP
10	4.5500	14.71	10.17	24.88	46.00	-21.12	AVG
11 *	10.4660	36.00	10.60	46.60	60.00	-13.40	QP
12	10.4660	25.90	10.60	36.50	50.00	-13.50	AVG

EUT	HUAWEI MediaPad T3 7.0 (MediaPad T3 7.0 for short)	Model Name	BG2-W09
Temperature	24°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz	Phase	Line
Test Mode	Adapter+Earphone+Camera on+2.4G WiFi+GPS+Bluetooth		
Note	Adapter:PHITEK+USB Cable:Luxshare+Earphone:LIANCHUANG		
Test Engineer	Kevin Li		

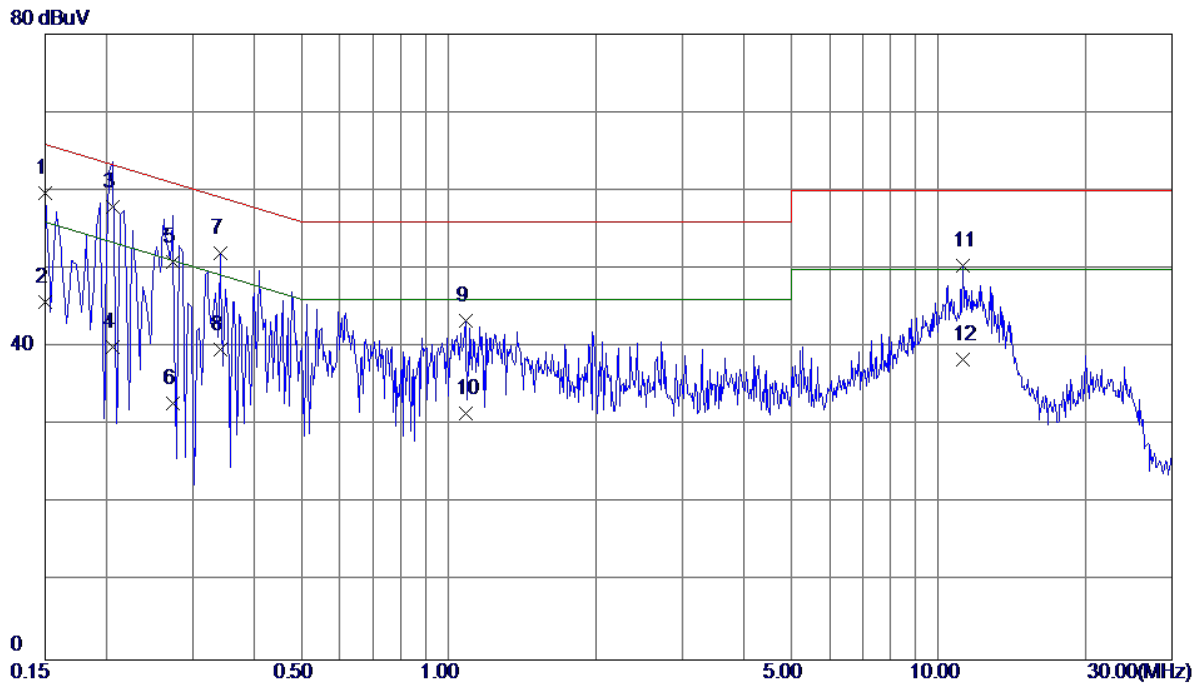

No.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure ment dBuV	Limit dBuV	Margin dB	Detector
1	0.1500	50.12	9.57	59.69	66.00	-6.31	QP
2	0.1500	36.20	9.57	45.77	56.00	-10.23	AVG
3 *	0.2060	48.40	9.57	57.97	63.37	-5.40	QP
4	0.2060	30.40	9.57	39.97	53.37	-13.40	AVG
5	0.2740	41.30	9.57	50.87	61.00	-10.13	QP
6	0.2740	23.20	9.57	32.77	51.00	-18.23	AVG
7	0.3420	42.37	9.58	51.95	59.15	-7.20	QP
8	0.3420	30.10	9.58	39.68	49.15	-9.47	AVG
9	1.0820	33.56	9.85	43.41	56.00	-12.59	QP
10	1.0820	21.60	9.85	31.45	46.00	-14.55	AVG
11	11.2460	39.87	10.54	50.41	60.00	-9.59	QP
12	11.2460	27.80	10.54	38.34	50.00	-11.66	AVG


EUT	HUAWEI MediaPad T3 7.0 (MediaPad T3 7.0 for short)	Model Name	BG2-W09
Temperature	24°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz	Phase	Neutral
Test Mode	Adapter+Earphone+Camera on+2.4G WiFi+GPS+Bluetooth		
Note	Adapter:PHITEK+USB Cable:Luxshare+Earphone:LIANCHUANG		
Test Engineer	Kevin Li		

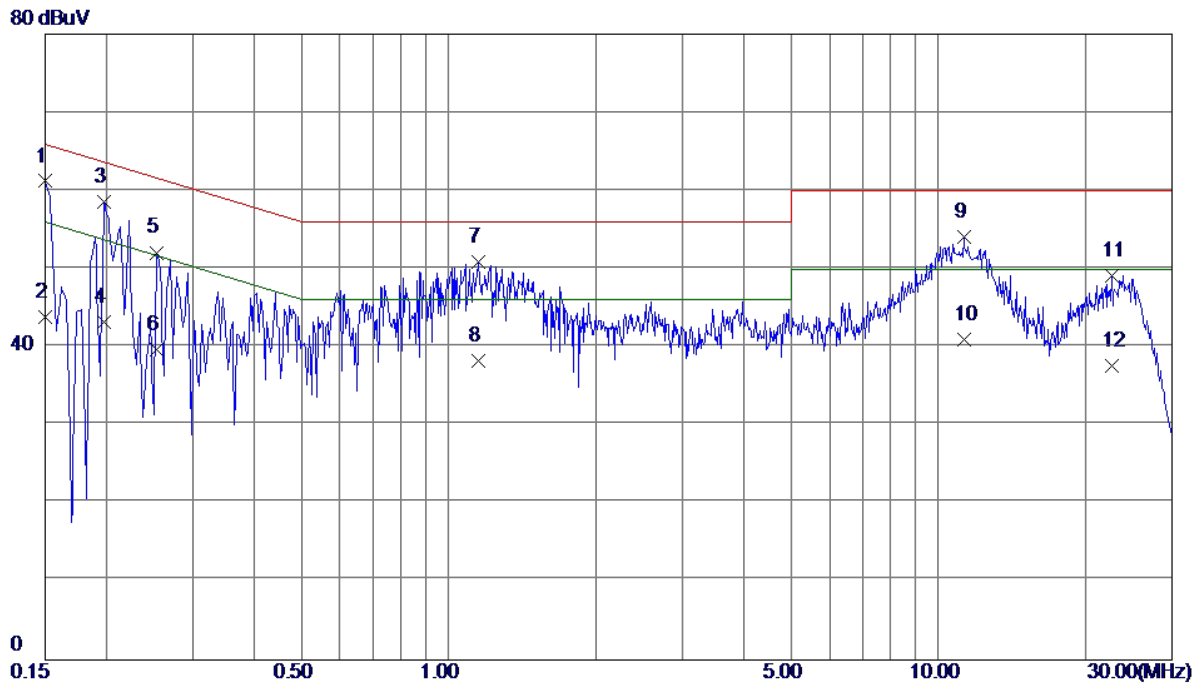

No.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure ment dBuV	Limit dBuV	Margin dB	Detector
1 *	0.1500	51.63	9.57	61.20	66.00	-4.80	QP
2	0.1500	34.20	9.57	43.77	56.00	-12.23	AVG
3	0.1980	48.97	9.56	58.53	63.69	-5.16	QP
4	0.1980	33.60	9.56	43.16	53.69	-10.53	AVG
5	0.2540	42.51	9.57	52.08	61.63	-9.55	QP
6	0.2540	30.10	9.57	39.67	51.63	-11.96	AVG
7	1.1500	41.17	9.75	50.92	56.00	-5.08	QP
8	1.1500	28.50	9.75	38.25	46.00	-7.75	AVG
9	11.2620	43.41	10.62	54.03	60.00	-5.97	QP
10	11.2620	30.40	10.62	41.02	50.00	-8.98	AVG
11	22.5700	38.14	10.95	49.09	60.00	-10.91	QP
12	22.5700	26.70	10.95	37.65	50.00	-12.35	AVG

EUT	HUAWEI MediaPad T3 7.0 (MediaPad T3 7.0 for short)	Model Name	BG2-W09
Temperature	24°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz	Phase	Line
Test Mode	Adapter+Earphone+Camera on+2.4G WiFi+GPS+Bluetooth		
Note	Adapter:HUNTKEY+USB Cable:Luxshare+Earphone:LIANCHUANG		
Test Engineer	Kevin Li		


80 dBuV

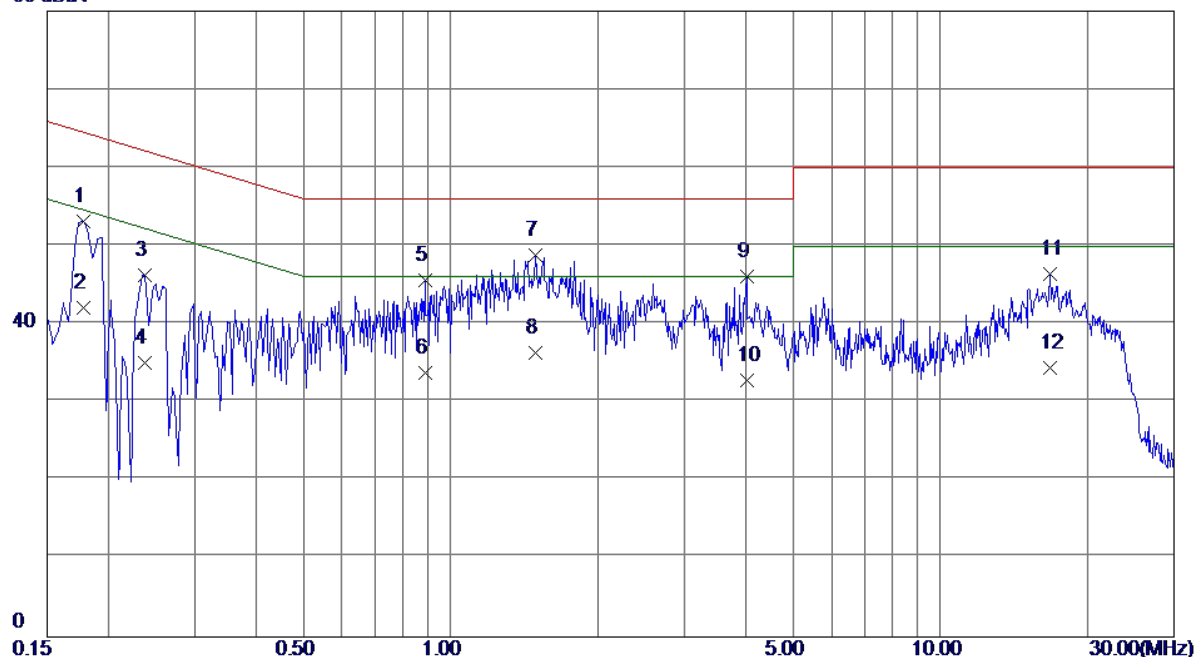

No.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure ment dBuV	Limit dBuV	Margin dB	Detector
1	0.1780	43.60	9.57	53.17	64.58	-11.41	QP
2	0.1780	32.50	9.57	42.07	54.58	-12.51	AVG
3	0.2380	36.74	9.57	46.31	62.17	-15.86	QP
4	0.2380	25.40	9.57	34.97	52.17	-17.20	AVG
5	0.8860	35.72	9.83	45.55	56.00	-10.45	QP
6	0.8860	23.90	9.83	33.73	46.00	-12.27	AVG
7 *	1.4940	38.85	9.97	48.82	56.00	-7.18	QP
8	1.4940	26.30	9.97	36.27	46.00	-9.73	AVG
9	4.0260	35.66	10.39	46.05	56.00	-9.95	QP
10	4.0260	22.39	10.39	32.78	46.00	-13.22	AVG
11	16.7780	35.65	10.74	46.39	60.00	-13.61	QP
12	16.7780	23.60	10.74	34.34	50.00	-15.66	AVG

EUT	HUAWEI MediaPad T3 7.0 (MediaPad T3 7.0 for short)	Model Name	BG2-W09
Temperature	24°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz	Phase	Neutral
Test Mode	Adapter+Earphone+Camera on+2.4G WiFi+GPS+Bluetooth		
Note	Adapter:HUNTKEY+USB Cable:Luxshare+Earphone:LIANCHUANG		
Test Engineer	Kevin Li		


80 dBuV

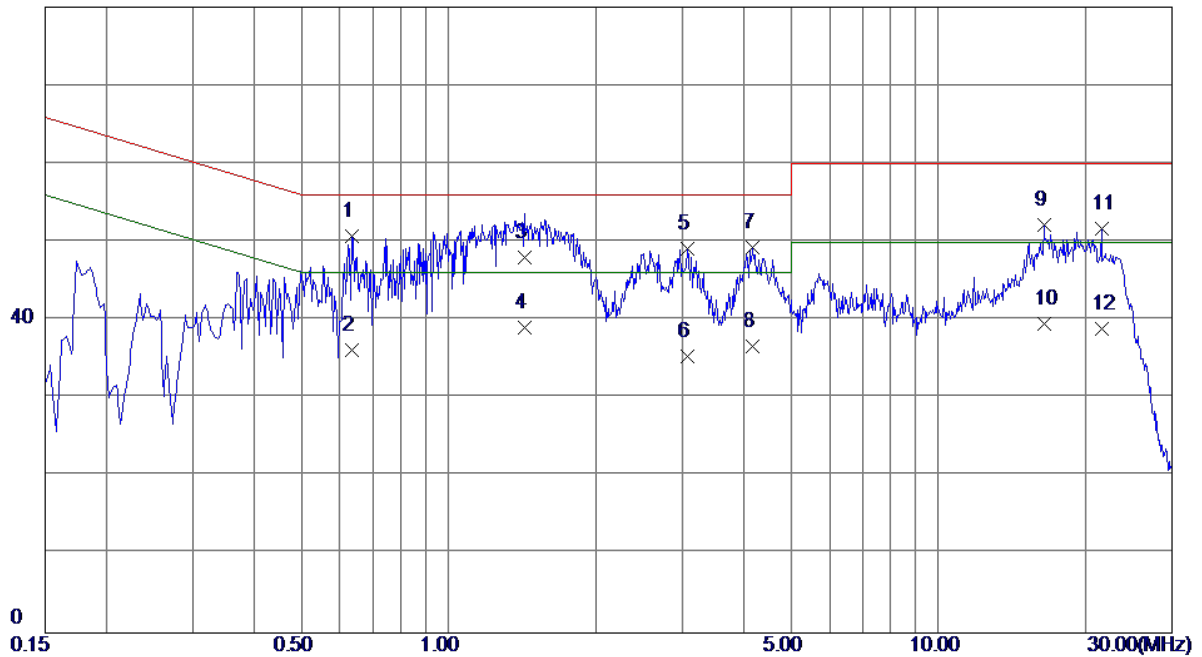

No.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure ment dBuV	Limit dBuV	Margin dB	Detector
1 *	0.6340	41.24	9.50	50.74	56.00	-5.26	QP
2	0.6340	26.70	9.50	36.20	46.00	-9.80	AVG
3	1.4299	38.20	9.77	47.97	56.00	-8.03	QP
4	1.4299	29.20	9.77	38.97	46.00	-7.03	AVG
5	3.0660	39.15	9.97	49.12	56.00	-6.88	QP
6	3.0660	25.40	9.97	35.37	46.00	-10.63	AVG
7	4.1779	39.08	10.12	49.20	56.00	-6.80	QP
8	4.1779	26.50	10.12	36.62	46.00	-9.38	AVG
9	16.4780	41.37	10.76	52.13	60.00	-7.87	QP
10	16.4780	28.70	10.76	39.46	50.00	-10.54	AVG
11	21.5780	40.80	10.93	51.73	60.00	-8.27	QP
12	21.5780	27.90	10.93	38.83	50.00	-11.17	AVG

EUT	HUAWEI MediaPad T3 7.0 (MediaPad T3 7.0 for short)	Model Name	BG2-W09
Temperature	24°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz	Phase	Line
Test Mode	Adapter+Earphone+Camera on+2.4G WiFi+GPS+Bluetooth		
Note	Adapter:BYD+USB Cable:Luxshare+Earphone:LIANCHUANG		
Test Engineer	Kevin Li		


80 dBuV

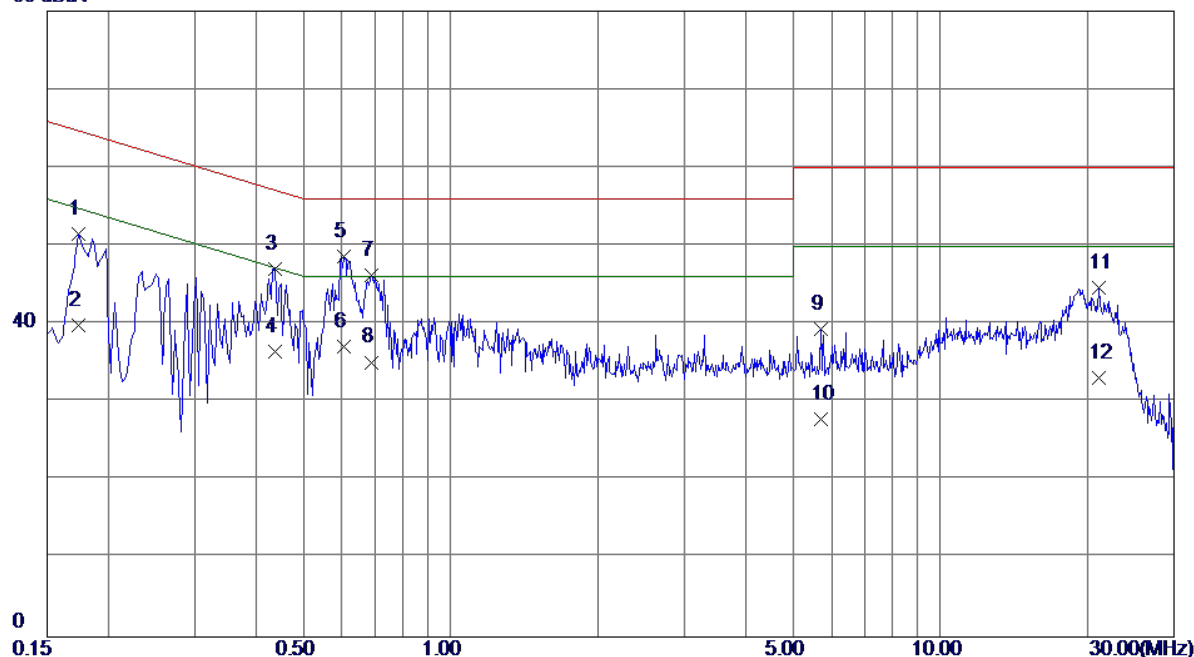

No.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure ment dBuV	Limit dBuV	Margin dB	Detector
1	0.1740	41.88	9.57	51.45	64.77	-13.32	QP
2	0.1740	30.20	9.57	39.77	54.77	-15.00	AVG
3	0.4380	37.41	9.62	47.03	57.10	-10.07	QP
4	0.4380	26.81	9.62	36.43	47.10	-10.67	AVG
5 *	0.6060	38.94	9.70	48.64	56.00	-7.36	QP
6	0.6060	27.40	9.70	37.10	46.00	-8.90	AVG
7	0.6900	36.49	9.71	46.20	56.00	-9.80	QP
8	0.6900	25.41	9.71	35.12	46.00	-10.88	AVG
9	5.6940	28.99	10.30	39.29	60.00	-20.71	QP
10	5.6940	17.50	10.30	27.80	50.00	-22.20	AVG
11	21.1340	33.86	10.81	44.67	60.00	-15.33	QP
12	21.1340	22.30	10.81	33.11	50.00	-16.89	AVG


EUT	HUAWEI MediaPad T3 7.0 (MediaPad T3 7.0 for short)	Model Name	BG2-W09
Temperature	24°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz	Phase	Neutral
Test Mode	Adapter+Earphone+Camera on+2.4G WiFi+GPS+Bluetooth		
Note	Adapter:BYD+USB Cable:Luxshare+Earphone:LIANCHUANG		
Test Engineer	Kevin Li		

80 dBuV

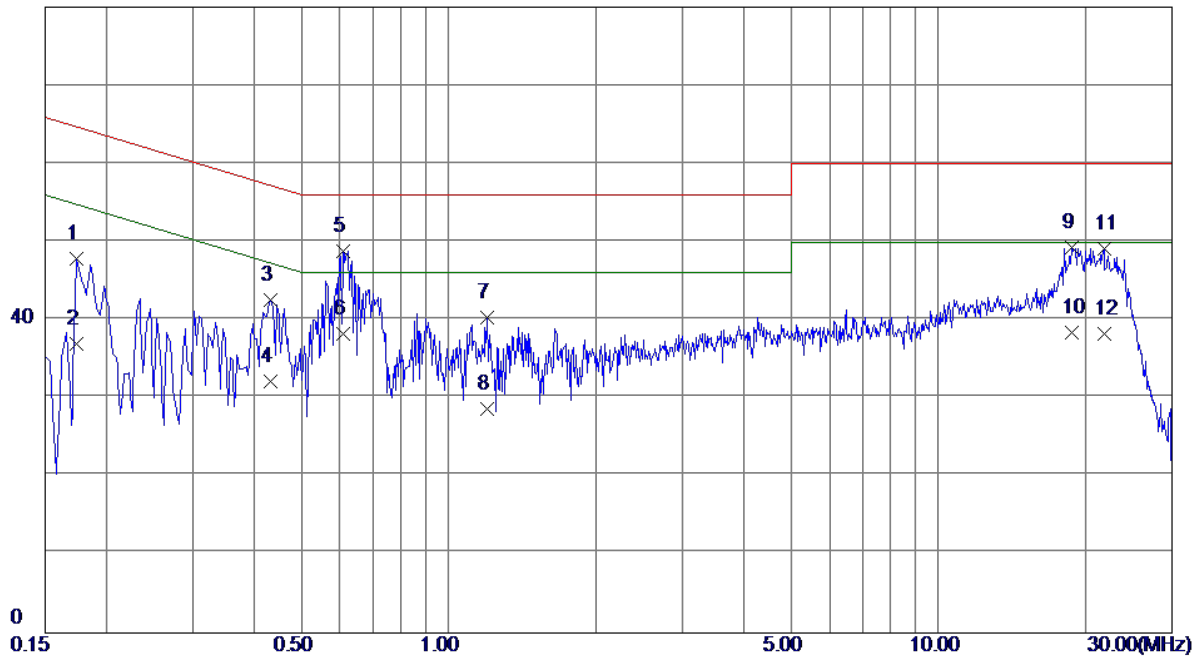

No.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure ment dBuV	Limit dBuV	Margin dB	Detector
1	0.1740	38.29	9.48	47.77	64.77	-17.00	QP
2	0.1740	27.50	9.48	36.98	54.77	-17.79	AVG
3	0.4340	33.03	9.49	42.52	57.18	-14.66	QP
4	0.4340	22.60	9.49	32.09	47.18	-15.09	AVG
5 *	0.6100	39.34	9.50	48.84	56.00	-7.16	QP
6	0.6100	28.70	9.50	38.20	46.00	-7.80	AVG
7	1.1980	30.55	9.75	40.30	56.00	-15.70	QP
8	1.1980	18.90	9.75	28.65	46.00	-17.35	AVG
9	18.7700	38.49	10.85	49.34	60.00	-10.66	QP
10	18.7700	27.61	10.85	38.46	50.00	-11.54	AVG
11	21.7979	38.21	10.93	49.14	60.00	-10.86	QP
12	21.7979	27.30	10.93	38.23	50.00	-11.77	AVG


EUT	HUAWEI MediaPad T3 7.0 (MediaPad T3 7.0 for short)	Model Name	BG2-W09
Temperature	24°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz	Phase	Line
Test Mode	Adapter+Earphone+Camera on+5G WiFi+GPS+Bluetooth		
Note	Adapter:PHITEK+USB Cable:Luxshare+Earphone:LIANCHUANG		
Test Engineer	Kevin Li		

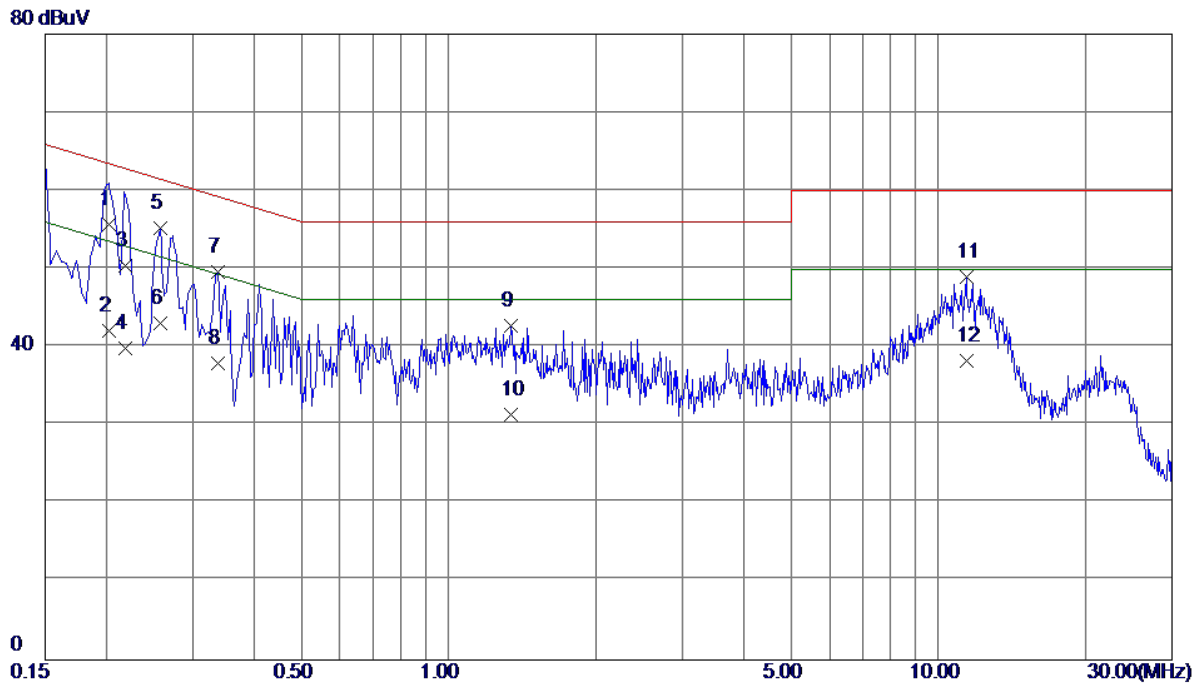

No.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure ment dBuV	Limit dBuV	Margin dB	Detector
1	0.2020	46.10	9.57	55.67	63.53	-7.86	QP
2	0.2020	32.50	9.57	42.07	53.53	-11.46	AVG
3	0.2180	40.80	9.57	50.37	62.89	-12.52	QP
4	0.2180	30.20	9.57	39.77	52.89	-13.12	AVG
5 *	0.2580	45.61	9.57	55.18	61.50	-6.32	QP
6	0.2580	33.50	9.57	43.07	51.50	-8.43	AVG
7	0.3379	40.07	9.58	49.65	59.25	-9.60	QP
8	0.3379	28.40	9.58	37.98	49.25	-11.27	AVG
9	1.3420	32.83	9.91	42.74	56.00	-13.26	QP
10	1.3420	21.40	9.91	31.31	46.00	-14.69	AVG
11	11.4300	38.40	10.55	48.95	60.00	-11.05	QP
12	11.4300	27.70	10.55	38.25	50.00	-11.75	AVG


EUT	HUAWEI MediaPad T3 7.0 (MediaPad T3 7.0 for short)	Model Name	BG2-W09
Temperature	24°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz	Phase	Neutral
Test Mode	Adapter+Earphone+Camera on+5G WiFi+GPS+Bluetooth		
Note	Adapter:PHITEK+USB Cable:Luxshare+Earphone:LIANCHUANG		
Test Engineer	Kevin Li		

80 dBuV

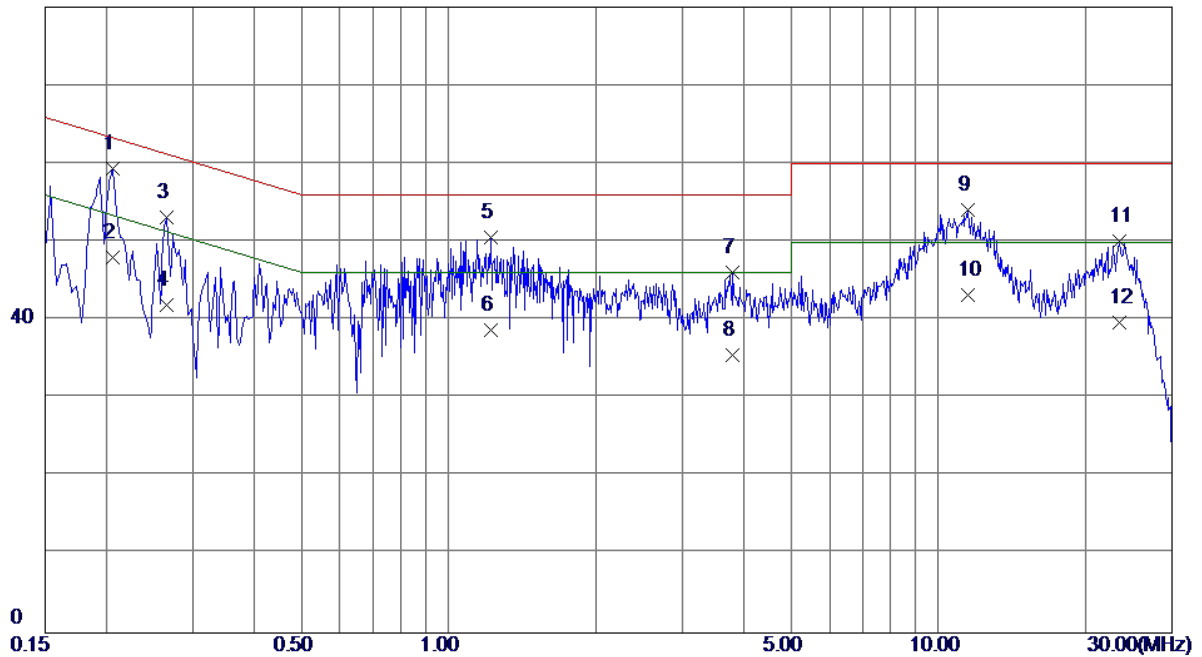

No.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure ment dBuV	Limit dBuV	Margin dB	Detector
1 *	0.2060	49.79	9.57	59.36	63.37	-4.01	QP
2	0.2060	38.50	9.57	48.07	53.37	-5.30	AVG
3	0.2660	43.52	9.57	53.09	61.24	-8.15	QP
4	0.2660	32.40	9.57	41.97	51.24	-9.27	AVG
5	1.2180	40.73	9.76	50.49	56.00	-5.51	QP
6	1.2180	28.90	9.76	38.66	46.00	-7.34	AVG
7	3.8060	36.02	10.06	46.08	56.00	-9.92	QP
8	3.8060	25.40	10.06	35.46	46.00	-10.54	AVG
9	11.4620	43.41	10.62	54.03	60.00	-5.97	QP
10	11.4620	32.60	10.62	43.22	50.00	-6.78	AVG
11	23.4940	39.05	10.96	50.01	60.00	-9.99	QP
12	23.4940	28.70	10.96	39.66	50.00	-10.34	AVG


EUT	HUAWEI MediaPad T3 7.0 (MediaPad T3 7.0 for short)	Model Name	BG2-W09
Temperature	24°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz	Phase	Line
Test Mode	Adapter+Earphone+Playing		
Note	Adapter:PHITEK+USB Cable:Luxshare+Earphone:LIANCHUANG		
Test Engineer	Kevin Li		

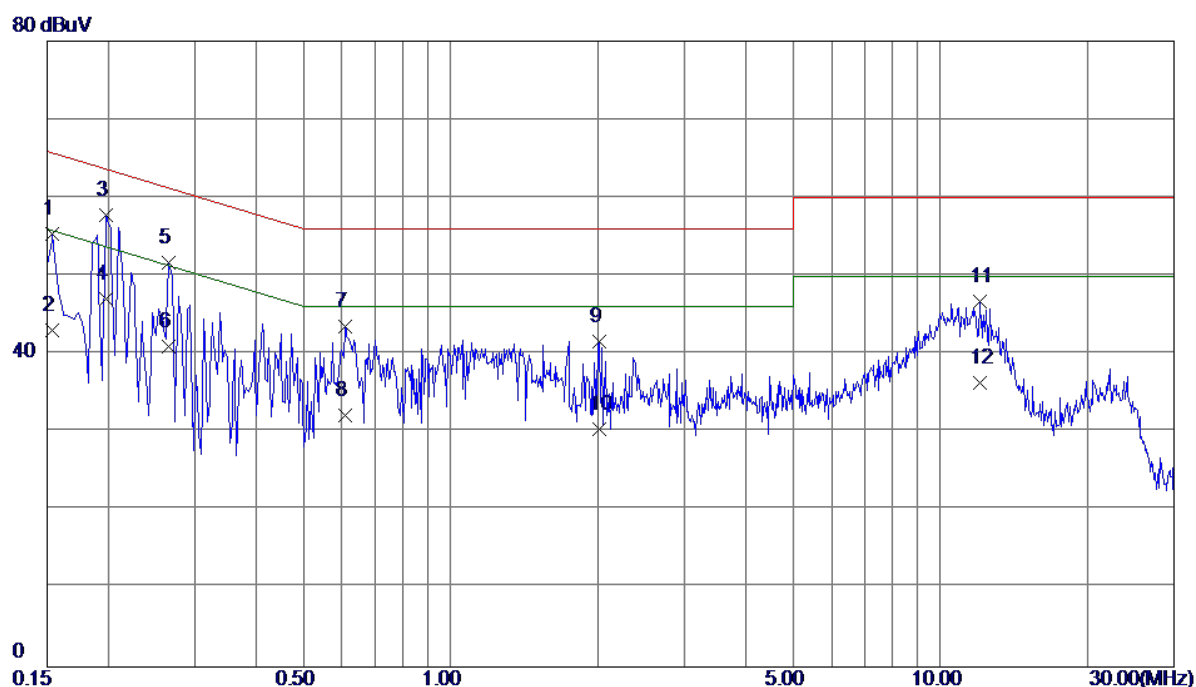

No.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure ment dBuV	Limit dBuV	Margin dB	Detector
1	0.1539	45.74	9.57	55.31	65.79	-10.48	QP
2	0.1539	33.50	9.57	43.07	55.79	-12.72	AVG
3 *	0.1980	48.16	9.57	57.73	63.69	-5.96	QP
4	0.1980	37.50	9.57	47.07	53.69	-6.62	AVG
5	0.2660	42.05	9.57	51.62	61.24	-9.62	QP
6	0.2660	31.40	9.57	40.97	51.24	-10.27	AVG
7	0.6100	33.77	9.70	43.47	56.00	-12.53	QP
8	0.6100	22.50	9.70	32.20	46.00	-13.80	AVG
9	2.0140	31.58	10.02	41.60	56.00	-14.40	QP
10	2.0140	20.40	10.02	30.42	46.00	-15.58	AVG
11	12.0219	36.08	10.57	46.65	60.00	-13.35	QP
12	12.0219	25.80	10.57	36.37	50.00	-13.63	AVG

EUT	HUAWEI MediaPad T3 7.0 (MediaPad T3 7.0 for short)	Model Name	BG2-W09
Temperature	24°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz	Phase	Neutral
Test Mode	Adapter+Earphone+Playing		
Note	Adapter:PHITEK+USB Cable:Luxshare+Earphone:LIANCHUANG		
Test Engineer	Kevin Li		


80 dBuV

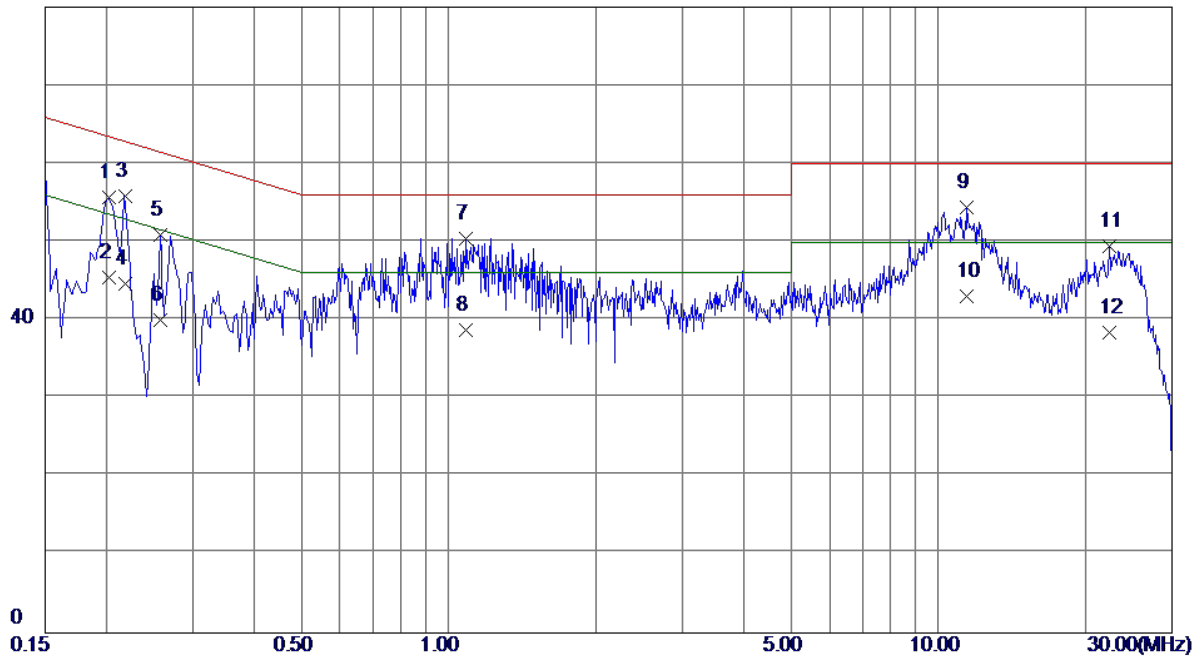

No.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure ment dBuV	Limit dBuV	Margin dB	Detector
1	0.2020	46.17	9.57	55.74	63.53	-7.79	QP
2	0.2020	35.80	9.57	45.37	53.53	-8.16	AVG
3	0.2180	46.20	9.57	55.77	62.89	-7.12	QP
4	0.2180	35.12	9.57	44.69	52.89	-8.20	AVG
5	0.2580	41.31	9.57	50.88	61.50	-10.62	QP
6	0.2580	30.40	9.57	39.97	51.50	-11.53	AVG
7	1.0859	40.66	9.75	50.41	56.00	-5.59	QP
8	1.0859	28.90	9.75	38.65	46.00	-7.35	AVG
9 *	11.4379	43.80	10.62	54.42	60.00	-5.58	QP
10	11.4379	32.47	10.62	43.09	50.00	-6.91	AVG
11	22.3740	38.56	10.94	49.50	60.00	-10.50	QP
12	22.3740	27.50	10.94	38.44	50.00	-11.56	AVG

EUT	HUAWEI MediaPad T3 7.0 (MediaPad T3 7.0 for short)	Model Name	BG2-W09
Temperature	24°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz	Phase	Line
Test Mode	Adapter+Speaker+Playing		
Note	Adapter:PHITEK+USB Cable:Luxshare		
Test Engineer	Kevin Li		


80 dBuV

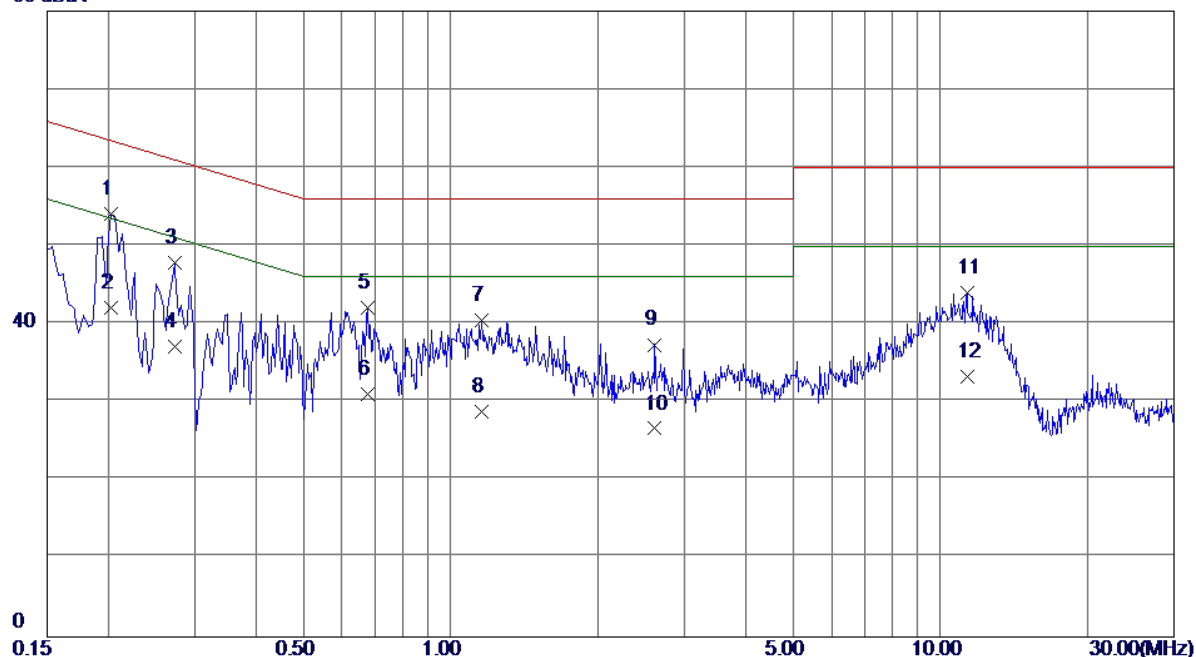

No.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure ment dBuV	Limit dBuV	Margin dB	Detector
1 *	0. 2020	44. 44	9. 57	54. 01	63. 53	-9. 52	QP
2	0. 2020	32. 50	9. 57	42. 07	53. 53	-11. 46	AVG
3	0. 2740	38. 31	9. 57	47. 88	61. 00	-13. 12	QP
4	0. 2740	27. 50	9. 57	37. 07	51. 00	-13. 93	AVG
5	0. 6780	32. 34	9. 71	42. 05	56. 00	-13. 95	QP
6	0. 6780	21. 40	9. 71	31. 11	46. 00	-14. 89	AVG
7	1. 1539	30. 57	9. 85	40. 42	56. 00	-15. 58	QP
8	1. 1539	18. 90	9. 85	28. 75	46. 00	-17. 25	AVG
9	2. 6140	27. 12	10. 24	37. 36	56. 00	-18. 64	QP
10	2. 6140	16. 40	10. 24	26. 64	46. 00	-19. 36	AVG
11	11. 3340	33. 45	10. 55	44. 00	60. 00	-16. 00	QP
12	11. 3340	22. 77	10. 55	33. 32	50. 00	-16. 68	AVG

EUT	HUAWEI MediaPad T3 7.0 (MediaPad T3 7.0 for short)	Model Name	BG2-W09
Temperature	24°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz	Phase	Neutral
Test Mode	Adapter+Speaker+Playing		
Note	Adapter:PHITEK+USB Cable:Luxshare		
Test Engineer	Kevin Li		

80 dBuV

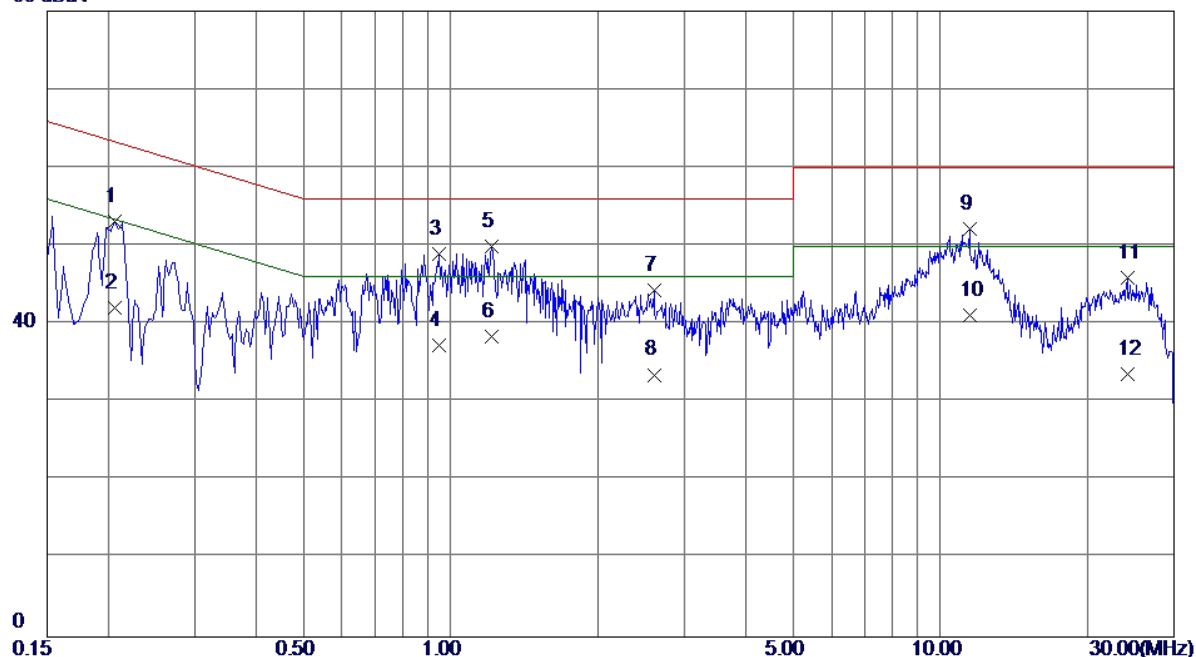

No.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure ment dBuV	Limit dBuV	Margin dB	Detector
1	0.2060	43.49	9.57	53.06	63.37	-10.31	QP
2	0.2060	32.50	9.57	42.07	53.37	-11.30	AVG
3	0.9460	39.22	9.73	48.95	56.00	-7.05	QP
4	0.9460	27.54	9.73	37.27	46.00	-8.73	AVG
5 *	1.2140	40.15	9.75	49.90	56.00	-6.10	QP
6	1.2140	28.60	9.75	38.35	46.00	-7.65	AVG
7	2.6020	34.35	9.94	44.29	56.00	-11.71	QP
8	2.6020	23.58	9.94	33.52	46.00	-12.48	AVG
9	11.4580	41.59	10.62	52.21	60.00	-7.79	QP
10	11.4580	30.45	10.62	41.07	50.00	-8.93	AVG
11	24.0580	34.92	10.97	45.89	60.00	-14.11	QP
12	24.0580	22.70	10.97	33.67	50.00	-16.33	AVG

4.2 RADIATED EMISSION MEASUREMENT

4.2.1 LIMITS OF RADIATED EMISSION MEASUREMENT

Below 1 GHz

Measurement Method and Applied Limits:

ANSI C63.4:

Frequency (MHz)	Class A (at 10m)		Class B (at 3m)	
	(uV/m) Field strength	(dBuV/m) Field strength	(uV/m) Field strength	(dBuV/m) Field strength
30 - 88	90	39	100	40
88 - 216	150	43.5	150	43.5
216 - 960	210	46.4	200	46
Above 960	300	49.5	500	54

Above 1 GHz

Measurement Method and Applied Limits:

ANSI C63.4:

Frequency (MHz)	Class A				Class B	
	(dBuV/m) (at 3m)		(dBuV/m) (at 10m)		(dBuV/m) (at 3m)	
	Peak	Average	Peak	Average	Peak	Average
Above 1000	80	60	69.5	49.5	74	54

FREQUENCY RANGE OF RADIATED MEASUREMENT (FOR UNINTENTIONAL RADIATORS)

Highest frequency generated or Upper frequency of measurement used in the device or on which the device operates or tunes (MHz)	Range (MHz)
Below 1.705	30
1.705 - 108	1000
108 - 500	2000
500 - 1000	5000
Above 1000	5 th harmonic of the highest frequency or 40 GHz, whichever is lower

NOTE:

- (1) The limit for radiated test was performed according to as following:
FCC Part 15, Subpart B
- (2) The tighter limit applies at the band edges.
- (3) Emission level (dBuV/m) = 20log Emission level (uV/m).
3m Emission level = 10m Emission level + 20log(10m/3m).
- (4) The test result calculated as following:
Measurement Value = Reading Level + Correct Factor
Correct Factor = Antenna Factor + Cable Loss - Amplifier Gain(if use)
Margin Level = Measurement Value - Limit Value

4.2.2 MEASUREMENT INSTRUMENTS LIST

Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Measurement Software	Farad	EZ-EMC Ver.NB-03A 1-01	N/A	N/A
2	Amplifier	Agilent	8449B	3008A02274	Mar. 10, 2017
3	Receiver	Agilent	N9038A	MY5213003 9	Sep. 04, 2017
4	Antenna	EM	EM-6876-1	230	Jul. 08, 2017
5	Controller	CT	SC100	N/A	N/A
6	Controller	MF	MF-7802	MF7802084 16	N/A
7	Cable	emci	EMC104-S M-SM-1200 0(12m)	N/A	Jul. 06, 2017
8	Double Ridged Guide Antenna	ETS	3115	00075789	Mar. 27, 2017
9	Broad-Band Horn Antenna	Schwarzbeck	BBHA 9170	9170319	Apr. 23, 2017
10	Microwave Preamplifier With Adaptor	EMC INSTRUMENT	EMC26540 45	980039 & HA01	Mar. 27, 2017

Remark: "N/A" denotes no model name, serial no. or calibration specified.

All calibration period of equipment list is one year.

4.2.3 TEST PROCEDURE

- a. The measuring distance of 3 m shall be used for measurements. The EUT was placed on the top of a rotating table 0.8 meter above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.(below 1GHz)
- b. The measuring distance of 3 m shall be used for measurements. The EUT was placed on the top of a rotating table 0.8 meter above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.(above 1GHz)
- c. The height of the equipment or of the substitution antenna shall be 0.8 m, the height of the test antenna shall vary between 1 m to 4 m. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights find the maximum reading (used Bore sight function).
- e. The receiver system was set to peak and average detect function and specified bandwidth with maximum hold mode when the test frequency is above 1GHz.
- f. The initial step in collecting radiated emission data is a receiver peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured.
- g. All readings are Peak unless otherwise stated QP in column of Note. Peak denotes that the Peak reading compliance with the QP Limits and then QP Mode measurement didn't perform. (below 1GHz)
- h. All readings are Peak Mode value unless otherwise stated AVG in column of Note. If the Peak Mode Measured value compliance with the Peak Limits and lower than AVG Limits, the EUT shall be deemed to meet both Peak & AVG Limits and then only Peak Mode was measured, but AVG Mode didn't perform. (above 1GHz)
- i. For the actual test configuration, please refer to the related Item - Block Diagram of system tested (please refer to 3.3).

Note:

The limits above 18GHz shall be extrapolated to the specified distance using an extrapolation factor of 20dB/decade from 3m to 1m

Distance extrapolation factor = $20 \log (3\text{m}/1\text{m})$ dB ;


Limit line = specific limits (dBUV) + 9.5 dB.

4.2.4 DEVIATION FROM TEST STANDARD


No deviation

4.2.5 TEST SETUP

(A) Radiated Emission Test Set-Up Frequency Below 1 GHz

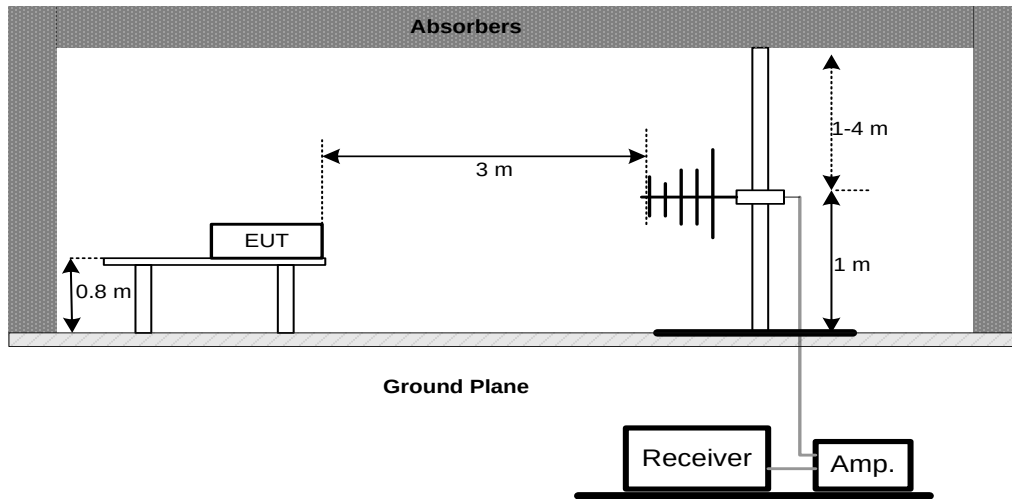

(B) Radiated Emission Test Set-Up Frequency Above 1 GHz

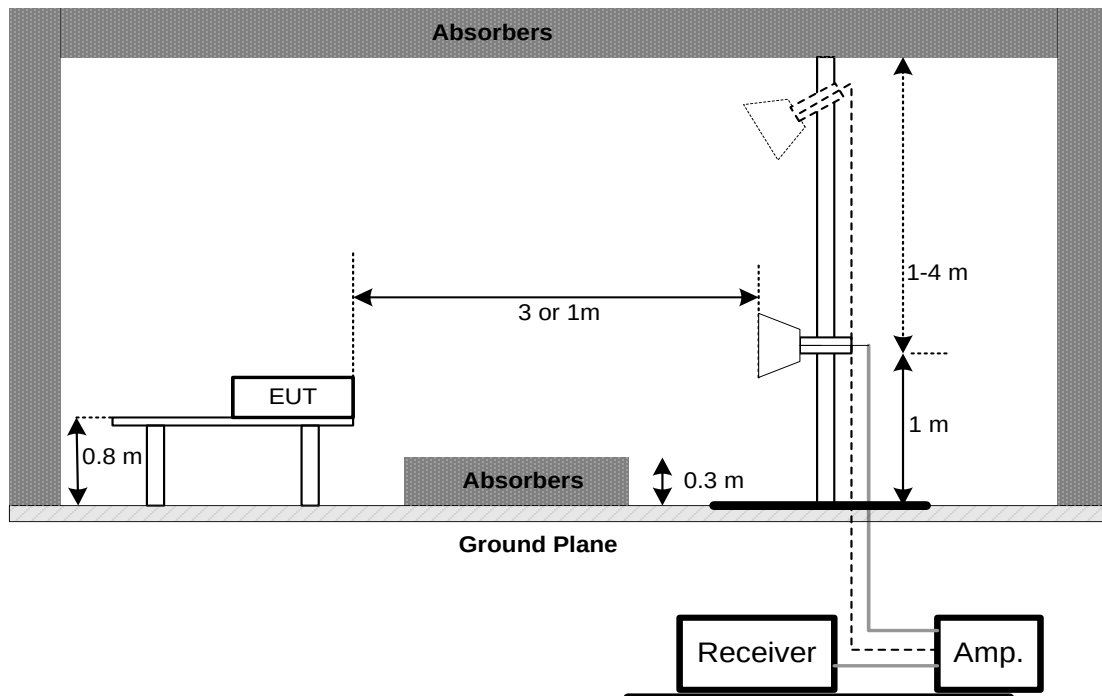


4.2.6 TEST RESULTS-BELOW 1GHZ

Remark :

- (1) All readings are Peak unless otherwise stated QP in column of 『Note』 . Peak denotes that the Peak reading compliance with the QP Limits and then QP Mode measurement didn't perform ◦
- (2) Measuring frequency range from 30MHz to 1000MHz ◦
- (3) If the peak scan value lower limit more than 20dB, then this signal data does not show in table ◦

EUT	HUAWEI MediaPad T3 7.0 (MediaPad T3 7.0 for short)	Model Name	BG2-W09
Temperature	25°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz	Polarization	Vertical
Test Mode	USB copy(EUT with PC)+Earphone		
Note	USB Cable:Luxshare+Earphone:LIANCHUANG		
Test Engineer	Kevin Li		


80 dBuV/m

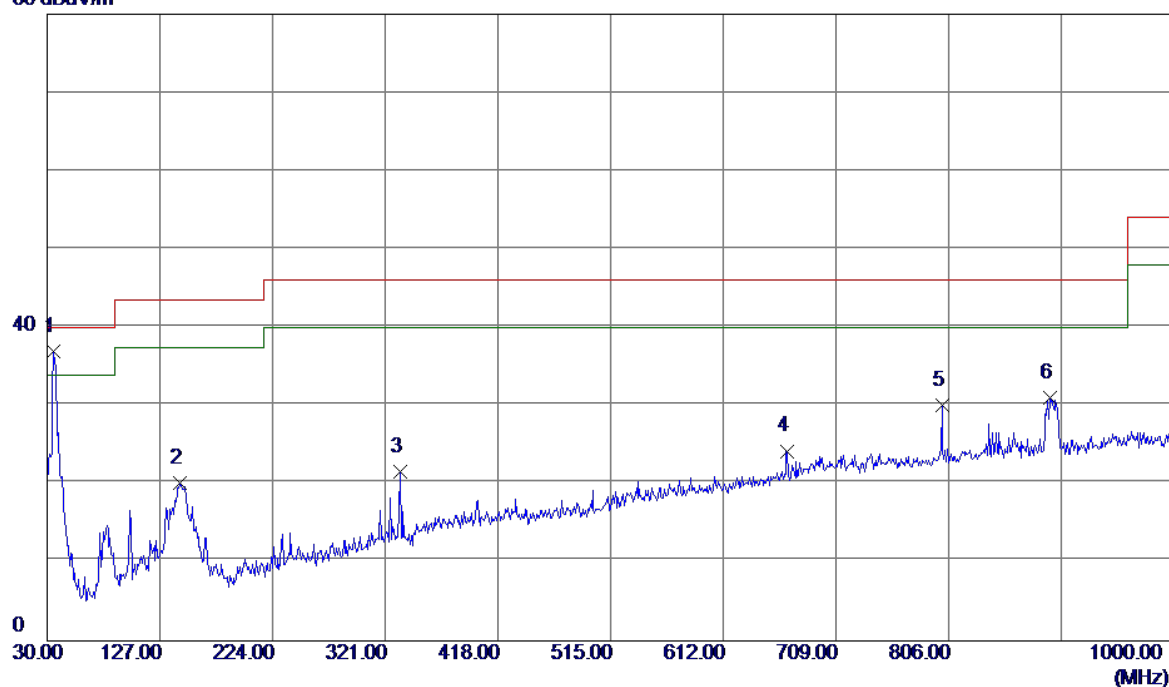

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector
1 *	35.8200	51.55	-14.58	36.97	40.00	-3.03	QP
2	144.4600	42.56	-22.34	20.22	43.50	-23.28	QP
3	333.6099	37.02	-15.40	21.62	46.00	-24.38	QP
4	667.2900	31.59	-7.35	24.24	46.00	-21.76	QP
5	800.1800	35.78	-5.77	30.01	46.00	-15.99	QP
6	893.3000	35.53	-4.47	31.06	46.00	-14.94	QP

EUT	HUAWEI MediaPad T3 7.0 (MediaPad T3 7.0 for short)	Model Name	BG2-W09
Temperature	25°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz	Polarization	Horizontal
Test Mode	USB copy(EUT with PC)+Earphone		
Note	USB Cable:Luxshare+Earphone:LIANCHUANG		
Test Engineer	Kevin Li		


80 dBuV/m

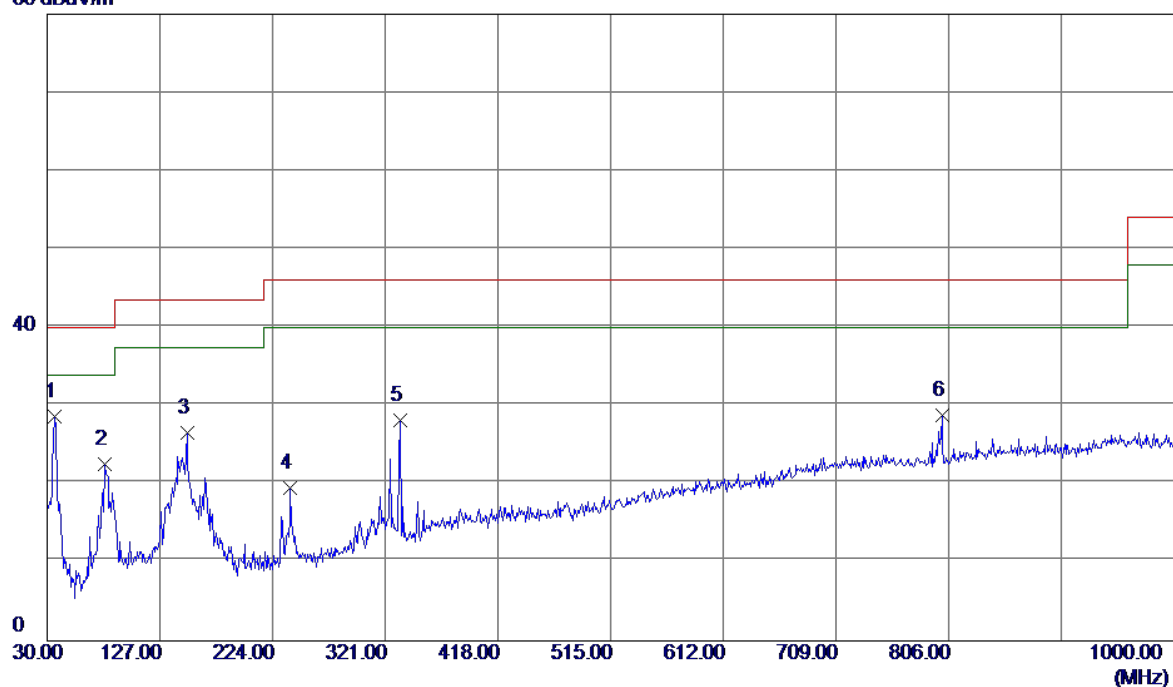

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector
1 *	36.7900	43.95	-15.27	28.68	40.00	-11.32	QP
2	79.4700	46.17	-23.67	22.50	40.00	-17.50	QP
3	150.2800	48.60	-21.98	26.62	43.50	-16.88	QP
4	239.5200	36.88	-17.42	19.46	46.00	-26.54	QP
5	333.6099	43.58	-15.40	28.18	46.00	-17.82	QP
6	800.1800	34.63	-5.77	28.86	46.00	-17.14	QP

EUT	HUAWEI MediaPad T3 7.0 (MediaPad T3 7.0 for short)	Model Name	BG2-W09
Temperature	25°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz	Polarization	Vertical
Test Mode	USB copy(EUT with PC)+Earphone		
Note	USB Cable:FOXCONN+Earphone:QUANCHENG		
Test Engineer	Kevin Li		


80 dBuV/m

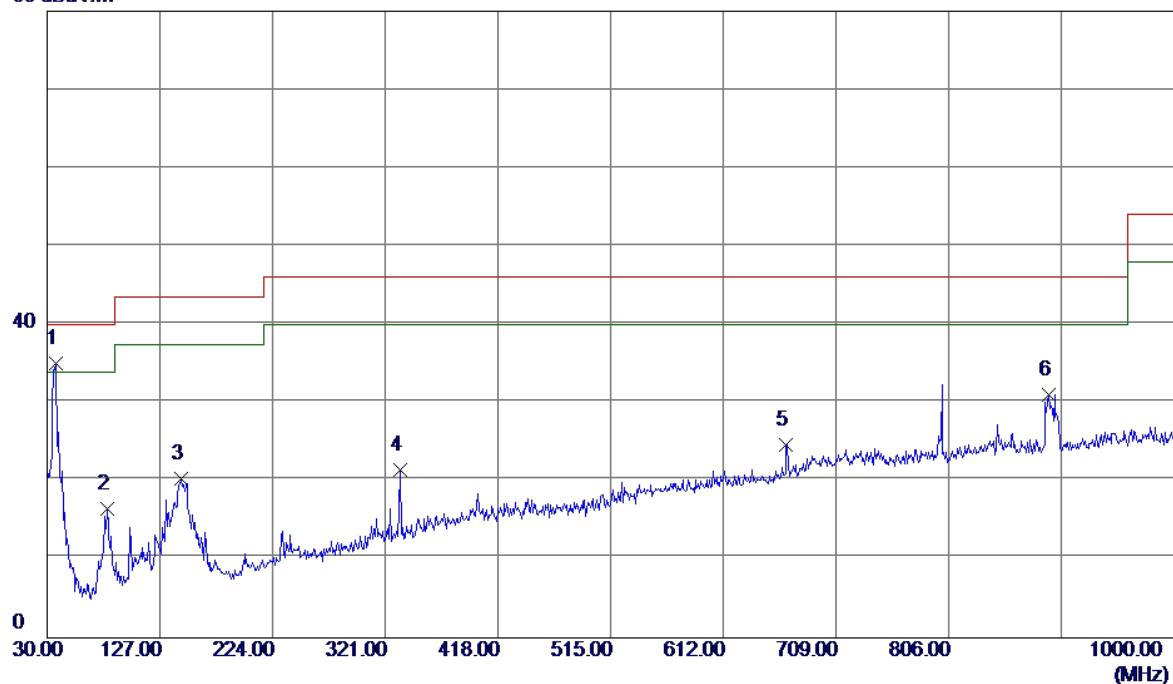

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector
1 *	37.7599	51.11	-16.04	35.07	40.00	-4.93	QP
2	81.4100	39.95	-23.53	16.42	40.00	-23.58	QP
3	145.4299	42.53	-22.28	20.25	43.50	-23.25	QP
4	333.6099	36.82	-15.40	21.42	46.00	-24.58	QP
5	666.3200	31.96	-7.39	24.57	46.00	-21.43	QP
6	892.3300	35.55	-4.47	31.08	46.00	-14.92	QP

EUT	HUAWEI MediaPad T3 7.0 (MediaPad T3 7.0 for short)	Model Name	BG2-W09
Temperature	25°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz	Polarization	Horizontal
Test Mode	USB copy(EUT with PC)+Earphone		
Note	USB Cable:FOXCONN+Earphone:QUANCHENG		
Test Engineer	Kevin Li		


80 dBuV/m

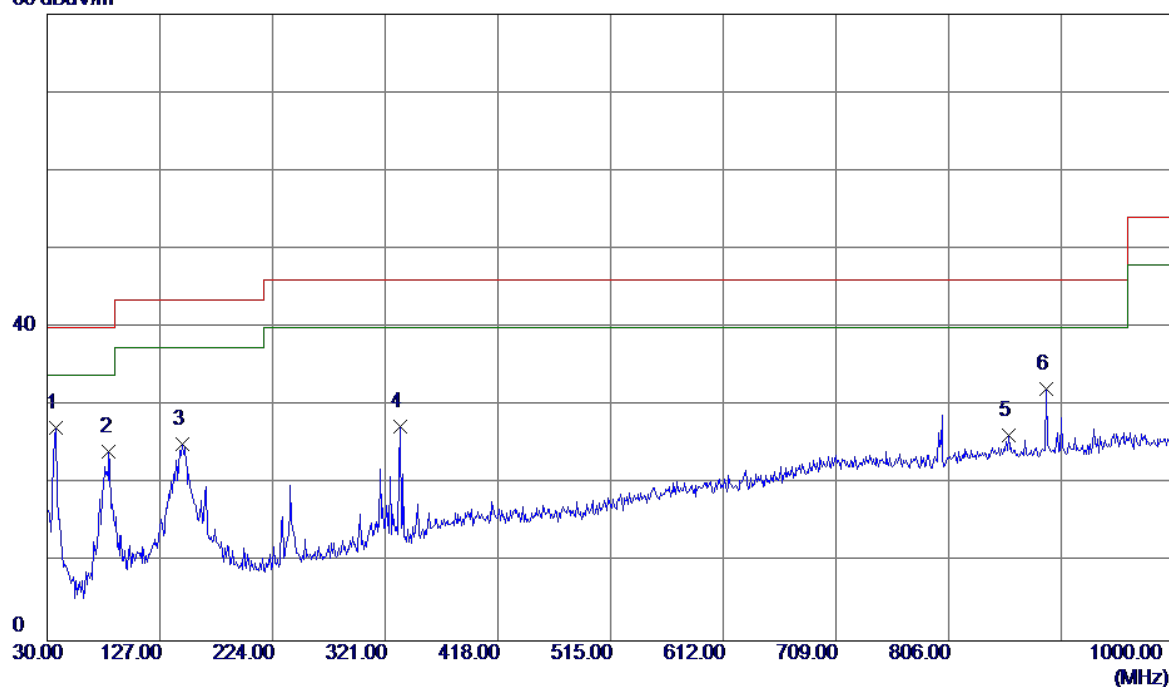

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector
1 *	37.7599	43.24	-16.04	27.20	40.00	-12.80	QP
2	83.3500	47.48	-23.36	24.12	40.00	-15.88	QP
3	146.4000	47.37	-22.21	25.16	43.50	-18.34	QP
4	333.6099	42.71	-15.40	27.31	46.00	-18.69	QP
5	857.4100	30.46	-4.28	26.18	46.00	-19.82	QP
6	890.3900	36.59	-4.46	32.13	46.00	-13.87	QP

EUT	HUAWEI MediaPad T3 7.0 (MediaPad T3 7.0 for short)	Model Name	BG2-W09
Temperature	25°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz	Polarization	Vertical
Test Mode	USB copy(EUT with PC)+Earphone		
Note	USB Cable:HONGLIN+Earphone:GoerTek		
Test Engineer	Kevin Li		


80 dBuV/m

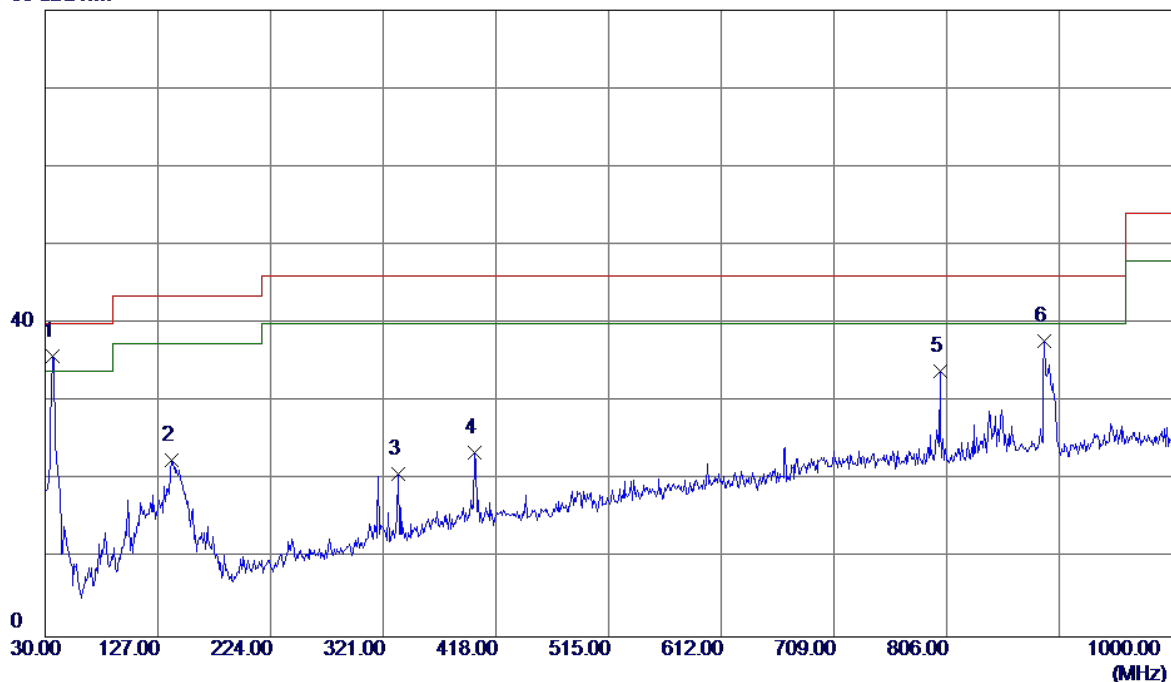

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector
1 *	36.7900	51.04	-15.27	35.77	40.00	-4.23	QP
2	138.6400	45.28	-22.68	22.60	43.50	-20.90	QP
3	333.6099	36.22	-15.40	20.82	46.00	-25.18	QP
4	399.5700	36.29	-12.79	23.50	46.00	-22.50	QP
5	800.1800	39.73	-5.77	33.96	46.00	-12.04	QP
6	890.3900	42.28	-4.46	37.82	46.00	-8.18	QP

EUT	HUAWEI MediaPad T3 7.0 (MediaPad T3 7.0 for short)	Model Name	BG2-W09
Temperature	25°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz	Polarization	Horizontal
Test Mode	USB copy(EUT with PC)+Earphone		
Note	USB Cable:HONGLIN+Earphone:GoerTek		
Test Engineer	Kevin Li		


80 dBuV/m

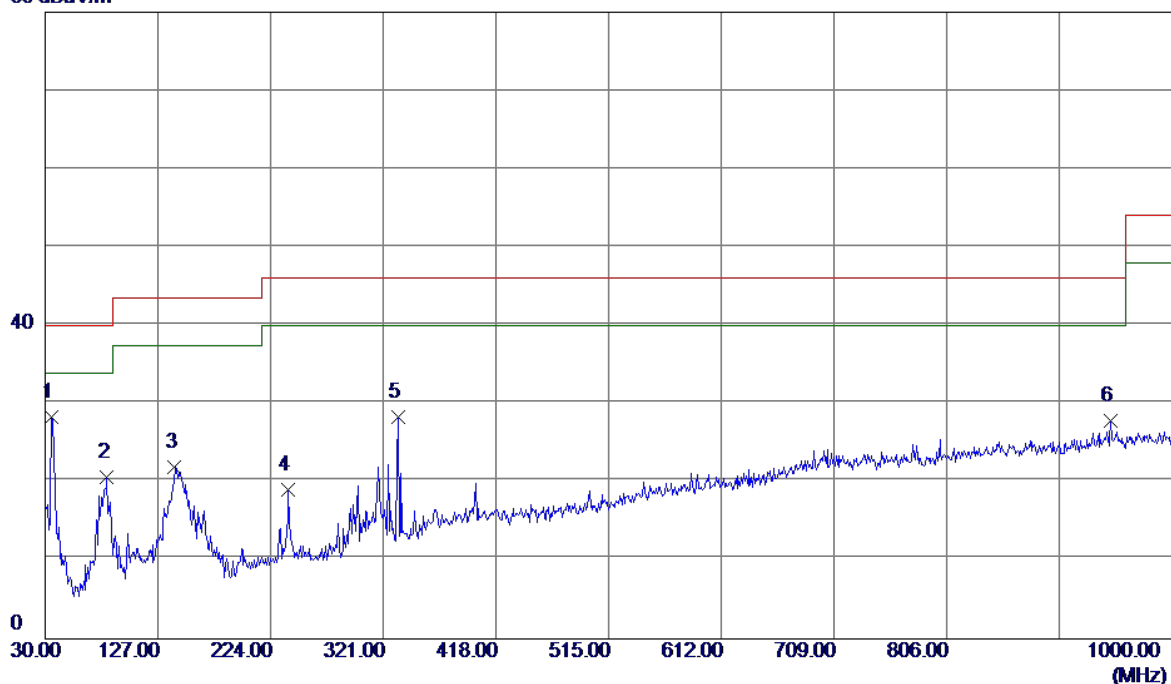

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector
1 *	35.8200	42.85	-14.58	28.27	40.00	-11.73	QP
2	83.3500	44.05	-23.36	20.69	40.00	-19.31	QP
3	141.5500	44.45	-22.53	21.92	43.50	-21.58	QP
4	239.5200	36.51	-17.42	19.09	46.00	-26.91	QP
5	333.6099	43.75	-15.40	28.35	46.00	-17.65	QP
6	947.6200	30.94	-3.09	27.85	46.00	-18.15	QP

EUT	HUAWEI MediaPad T3 7.0 (MediaPad T3 7.0 for short)	Model Name	BG2-W09
Temperature	25°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz	Polarization	Vertical
Test Mode	Adapter+Earphone+Camera on+2.4G WiFi+GPS+Bluetooth		
Note	Adapter:PHITEK+USB Cable:Luxshare+Earphone:LIANCHUANG		
Test Engineer	Kevin Li		


80 dBuV/m

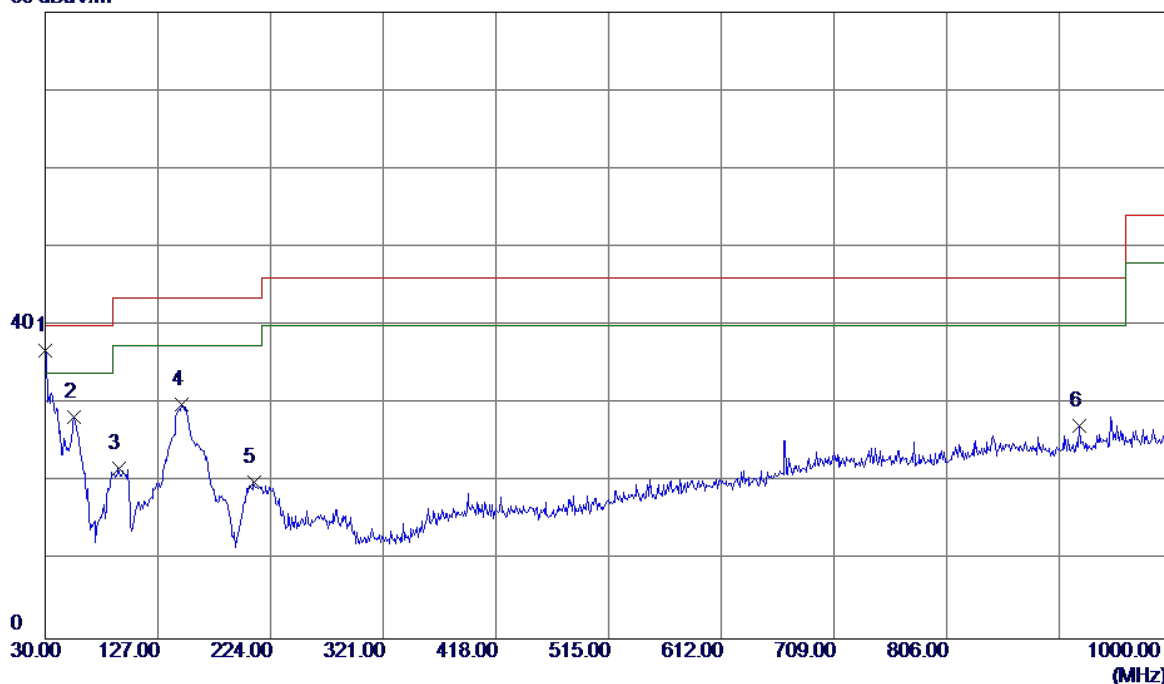

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector
1 *	30.0000	47.62	-10.89	36.73	40.00	-3.27	QP
2	55.2200	50.42	-22.10	28.32	40.00	-11.68	QP
3	93.0500	43.58	-21.88	21.70	43.50	-21.80	QP
4	147.3700	52.01	-22.15	29.86	43.50	-13.64	QP
5	209.4500	39.52	-19.51	20.01	43.50	-23.49	QP
6	920.4600	31.11	-3.90	27.21	46.00	-18.79	QP

EUT	HUAWEI MediaPad T3 7.0 (MediaPad T3 7.0 for short)	Model Name	BG2-W09
Temperature	25°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz	Polarization	Horizontal
Test Mode	Adapter+Earphone+Camera on+2.4G WiFi+GPS+Bluetooth		
Note	Adapter:PHITEK+USB Cable:Luxshare+Earphone:LIANCHUANG		
Test Engineer	Kevin Li		


80 dBuV/m

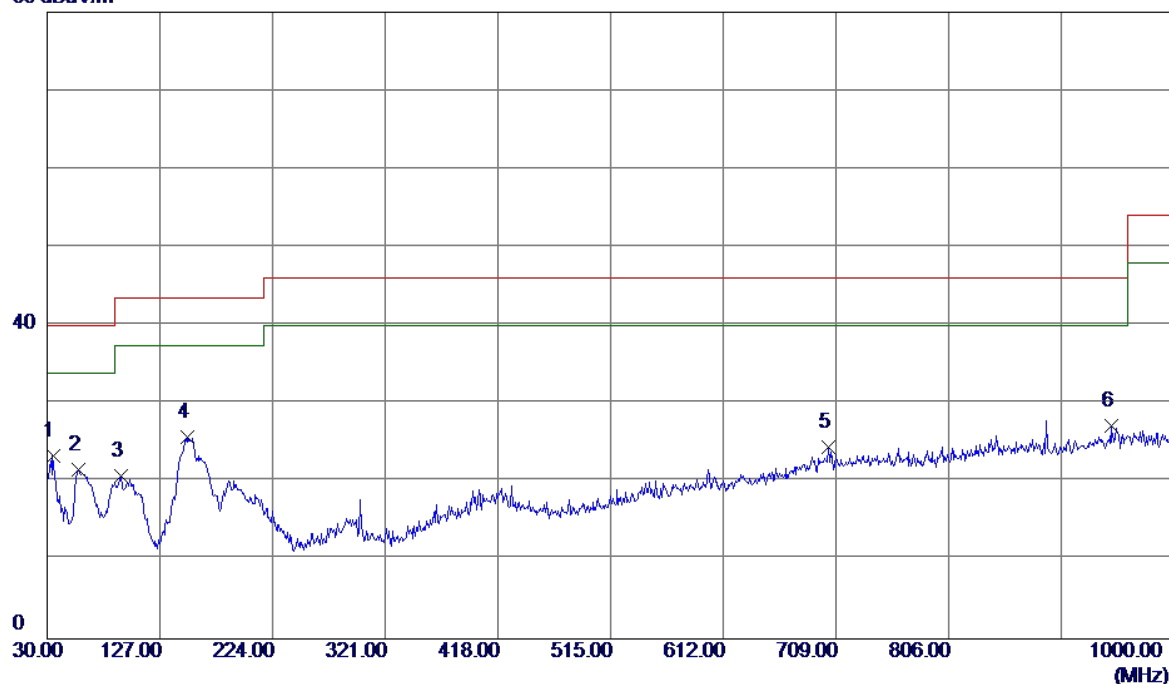

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector
1 *	34.8500	37.52	-14.20	23.32	40.00	-16.68	QP
2	57.1600	44.04	-22.46	21.58	40.00	-18.42	QP
3	94.0199	42.49	-21.71	20.78	43.50	-22.72	QP
4	150.2800	47.72	-21.98	25.74	43.50	-17.76	QP
5	702.2100	30.50	-6.05	24.45	46.00	-21.55	QP
6	945.6800	30.38	-3.15	27.23	46.00	-18.77	QP

EUT	HUAWEI MediaPad T3 7.0 (MediaPad T3 7.0 for short)	Model Name	BG2-W09
Temperature	25°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz	Polarization	Horizontal
Test Mode	Adapter+Earphone+Camera on+2.4G WiFi+GPS+Bluetooth		
Note	Adapter:HUNTKEY+USB Cable:Luxshare+Earphone:LIANCHUANG		
Test Engineer	Kevin Li		


80 dBuV/m

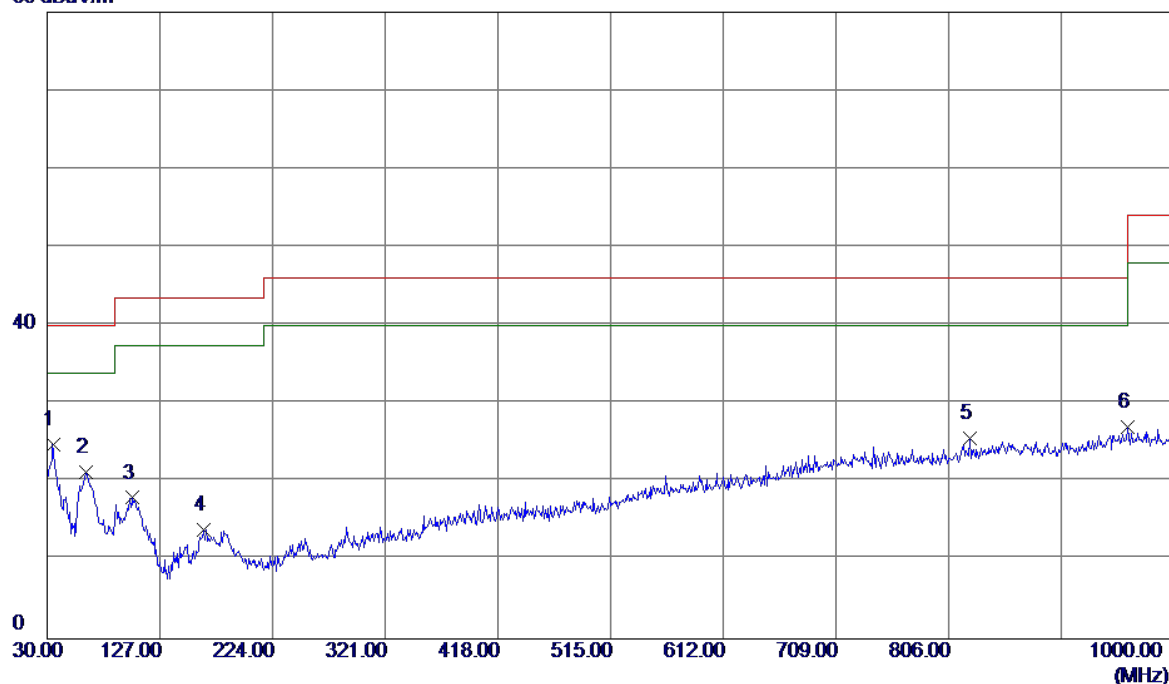

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector
1 *	34.8500	39.06	-14.20	24.86	40.00	-15.14	QP
2	62.9800	44.14	-22.84	21.30	40.00	-18.70	QP
3	103.7200	39.79	-21.79	18.00	43.50	-25.50	QP
4	164.8300	35.68	-21.77	13.91	43.50	-29.59	QP
5	824.4300	30.62	-5.03	25.59	46.00	-20.41	QP
6	960.2300	30.01	-2.98	27.03	54.00	-26.97	QP

EUT	HUAWEI MediaPad T3 7.0 (MediaPad T3 7.0 for short)	Model Name	BG2-W09
Temperature	25°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz	Polarization	Vertical
Test Mode	Adapter+Earphone+Camera on+2.4G WiFi+GPS+Bluetooth		
Note	Adapter:HUNTKEY+USB Cable:Luxshare+Earphone:LIANCHUANG		
Test Engineer	Kevin Li		


80 dBuV/m

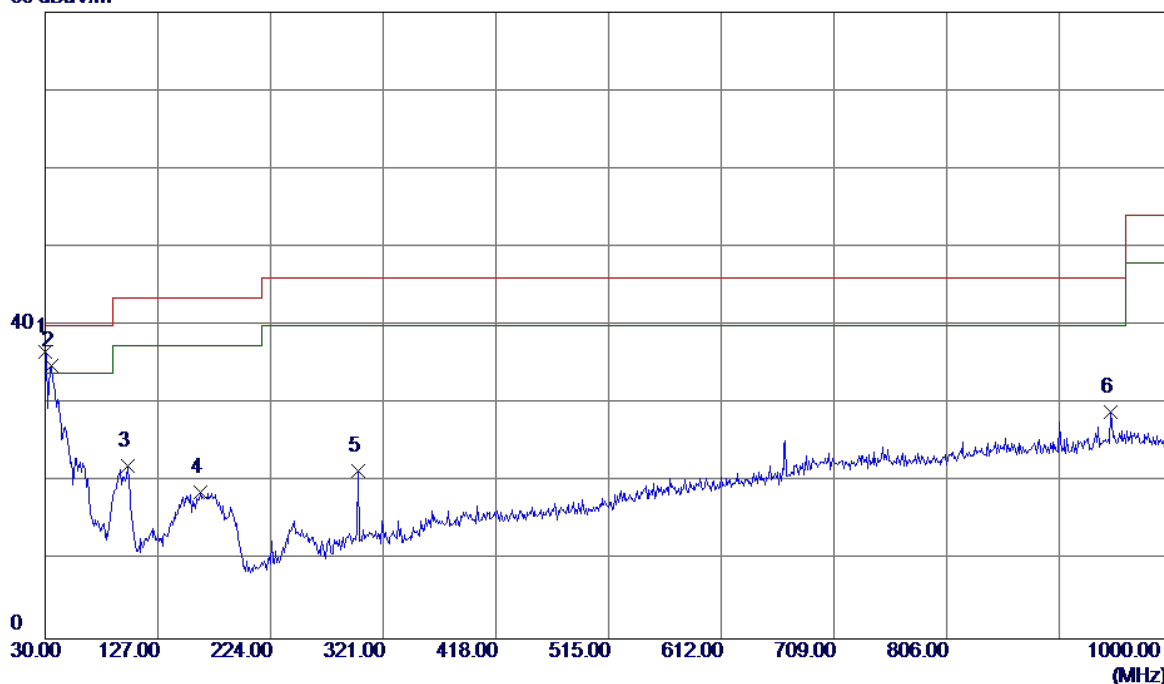

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector
1 *	30.0000	47.59	-10.89	36.70	40.00	-3.30	QP
2	35.8200	49.51	-14.58	34.93	40.00	-5.07	QP
3	100.8100	43.68	-21.66	22.02	43.50	-21.48	QP
4	163.8600	40.53	-21.85	18.68	43.50	-24.82	QP
5	299.6600	38.22	-16.75	21.47	46.00	-24.53	QP
6	947.6200	32.00	-3.09	28.91	46.00	-17.09	QP

EUT	HUAWEI MediaPad T3 7.0 (MediaPad T3 7.0 for short)	Model Name	BG2-W09
Temperature	25°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz	Polarization	Vertical
Test Mode	Adapter+Earphone+Camera on+2.4G WiFi+GPS+Bluetooth		
Note	Adapter:BYD+USB Cable:Luxshare+Earphone:LIANCHUANG		
Test Engineer	Kevin Li		


80 dBuV/m

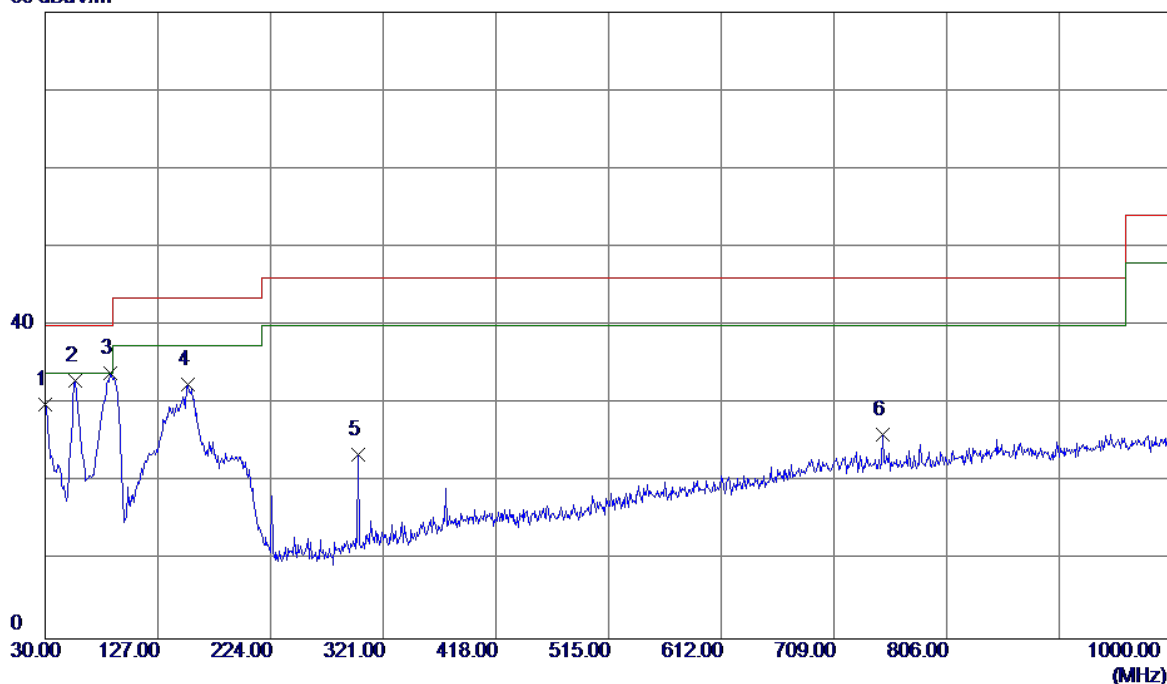

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector
1	30.0000	40.77	-10.89	29.88	40.00	-10.12	QP
2	56.1900	55.31	-22.32	32.99	40.00	-7.01	QP
3 *	86.2600	56.96	-23.01	33.95	40.00	-6.05	QP
4	153.1900	54.48	-22.03	32.45	43.50	-11.05	QP
5	299.6600	40.23	-16.75	23.48	46.00	-22.52	QP
6	750.7100	32.00	-5.92	26.08	46.00	-19.92	QP

EUT	HUAWEI MediaPad T3 7.0 (MediaPad T3 7.0 for short)	Model Name	BG2-W09
Temperature	25°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz	Polarization	Horizontal
Test Mode	Adapter+Earphone+Camera on+2.4G WiFi+GPS+Bluetooth		
Note	Adapter:BYD+USB Cable:Luxshare+Earphone:LIANCHUANG		
Test Engineer	Kevin Li		


80 dBuV/m

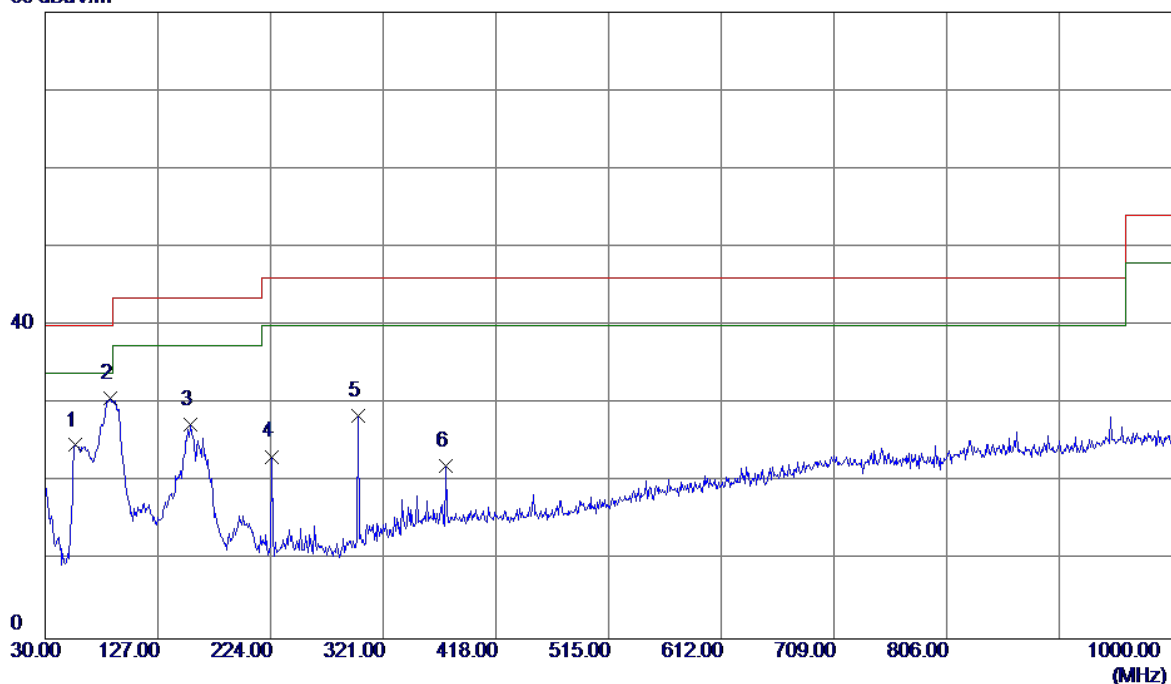

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector
1	56.1900	47.04	-22.32	24.72	40.00	-15.28	QP
2 *	86.2600	53.69	-23.01	30.68	40.00	-9.32	QP
3	155.1300	49.44	-22.06	27.38	43.50	-16.12	QP
4	224.9700	42.11	-18.83	23.28	46.00	-22.72	QP
5	299.6600	45.25	-16.75	28.50	46.00	-17.50	QP
6	375.3200	35.27	-13.23	22.04	46.00	-23.96	QP

EUT	HUAWEI MediaPad T3 7.0 (MediaPad T3 7.0 for short)	Model Name	BG2-W09
Temperature	25°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz	Polarization	Vertical
Test Mode	Adapter+Earphone+Camera on+5G WiFi+GPS+Bluetooth		
Note	Adapter:PHITEK+USB Cable:Luxshare+Earphone:LIANCHUANG		
Test Engineer	Kevin Li		


80 dBuV/m

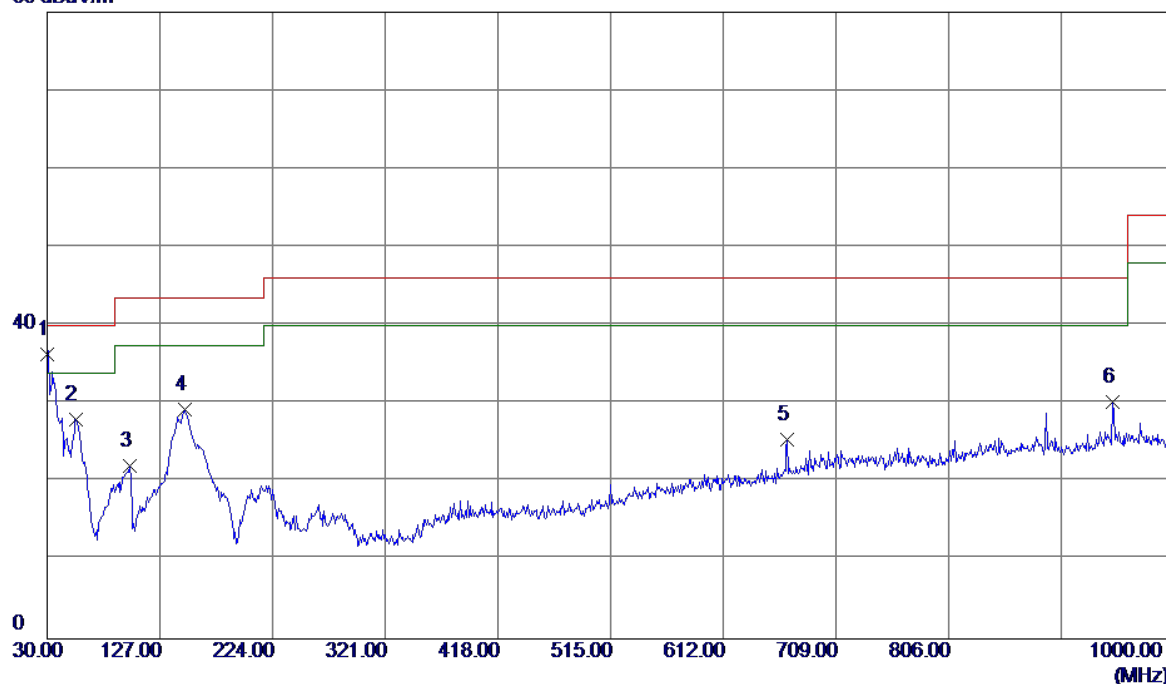

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector
1 *	30.0000	47.21	-10.89	36.32	40.00	-3.68	QP
2	54.2500	49.80	-21.87	27.93	40.00	-12.07	QP
3	100.8100	43.69	-21.66	22.03	43.50	-21.47	QP
4	148.3400	51.34	-22.09	29.25	43.50	-14.25	QP
5	667.2900	32.80	-7.35	25.45	46.00	-20.55	QP
6	947.6200	33.38	-3.09	30.29	46.00	-15.71	QP

EUT	HUAWEI MediaPad T3 7.0 (MediaPad T3 7.0 for short)	Model Name	BG2-W09
Temperature	25°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz	Polarization	Horizontal
Test Mode	Adapter+Earphone+Camera on+5G WiFi+GPS+Bluetooth		
Note	Adapter:PHITEK+USB Cable:Luxshare+Earphone:LIANCHUANG		
Test Engineer	Kevin Li		


80 dBuV/m

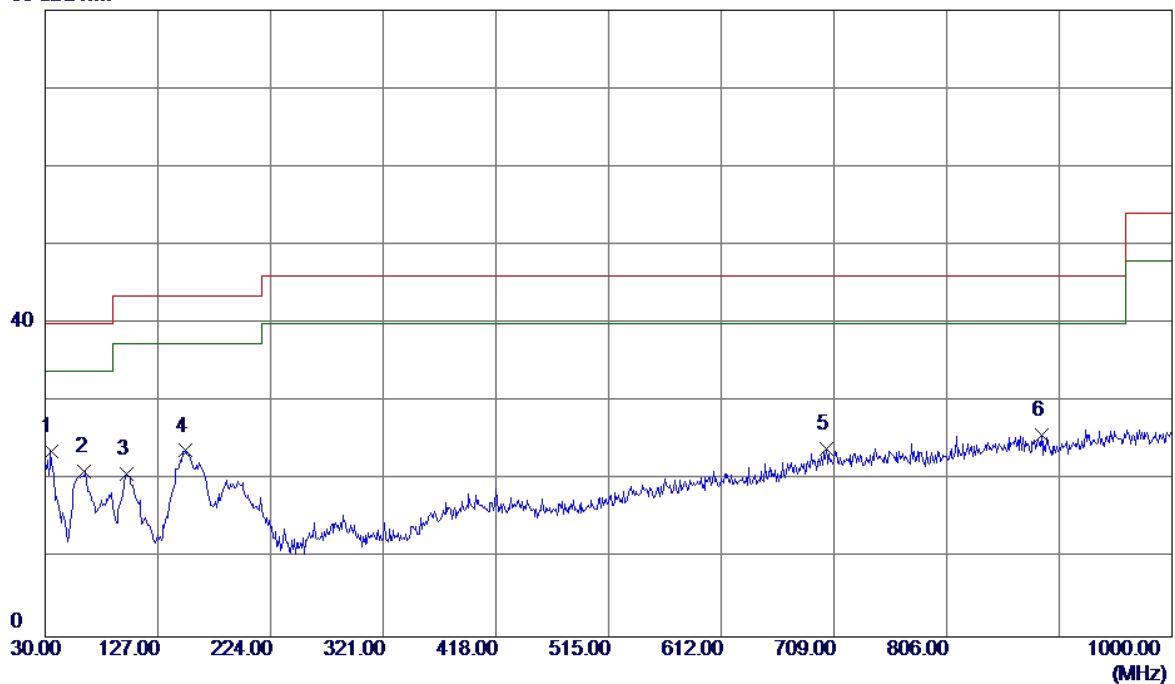

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector
1 *	34.8500	37.85	-14.20	23.65	40.00	-16.35	QP
2	63.9500	43.99	-22.87	21.12	40.00	-18.88	QP
3	99.8399	42.48	-21.62	20.86	43.50	-22.64	QP
4	150.2800	45.74	-21.98	23.76	43.50	-19.74	QP
5	702.2100	30.00	-6.05	23.95	46.00	-22.05	QP
6	887.4800	30.23	-4.44	25.79	46.00	-20.21	QP

EUT	HUAWEI MediaPad T3 7.0 (MediaPad T3 7.0 for short)	Model Name	BG2-W09
Temperature	25°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz	Polarization	Vertical
Test Mode	Adapter+Earphone+Playing		
Note	Adapter:PHITEK+USB Cable:Luxshare+Earphone:LIANCHUANG		
Test Engineer	Kevin Li		


80 dBuV/m

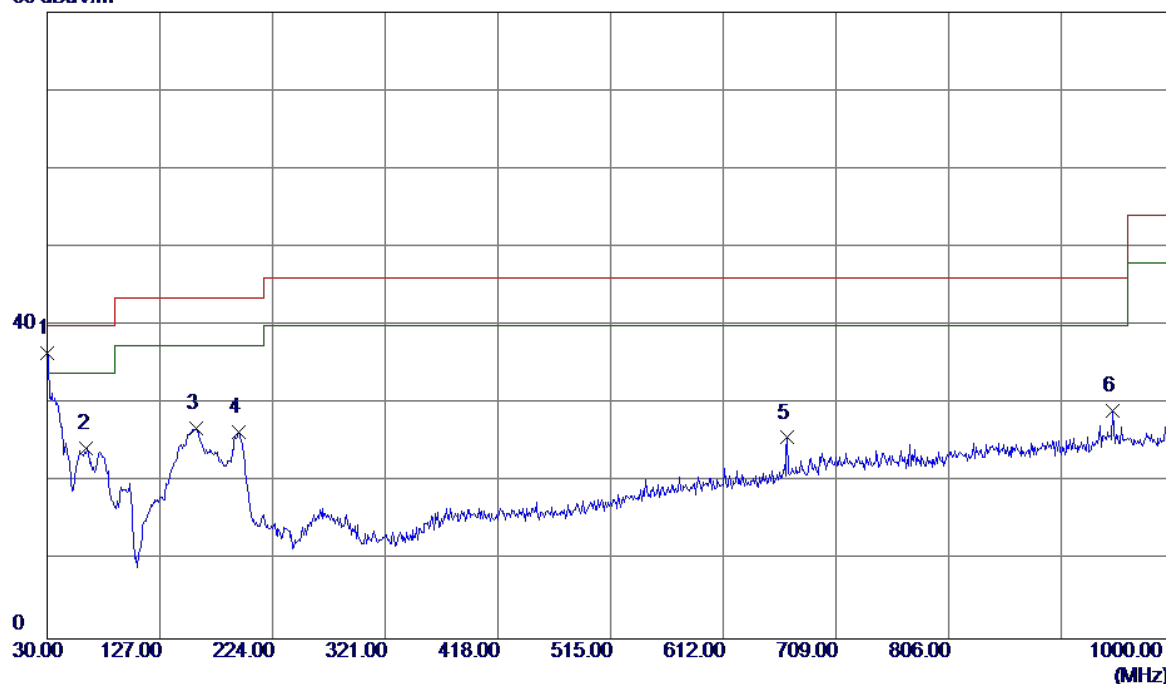

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector
1 *	30.0000	47.40	-10.89	36.51	40.00	-3.49	QP
2	63.9500	47.17	-22.87	24.30	40.00	-15.70	QP
3	158.0399	48.96	-22.10	26.86	43.50	-16.64	QP
4	194.9000	46.91	-20.44	26.47	43.50	-17.03	QP
5	667.2900	33.03	-7.35	25.68	46.00	-20.32	QP
6	947.6200	32.14	-3.09	29.05	46.00	-16.95	QP

EUT	HUAWEI MediaPad T3 7.0 (MediaPad T3 7.0 for short)	Model Name	BG2-W09
Temperature	25°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz	Polarization	Horizontal
Test Mode	Adapter+Earphone+Playing		
Note	Adapter:PHITEK+USB Cable:Luxshare+Earphone:LIANCHUANG		
Test Engineer	Kevin Li		


80 dBuV/m

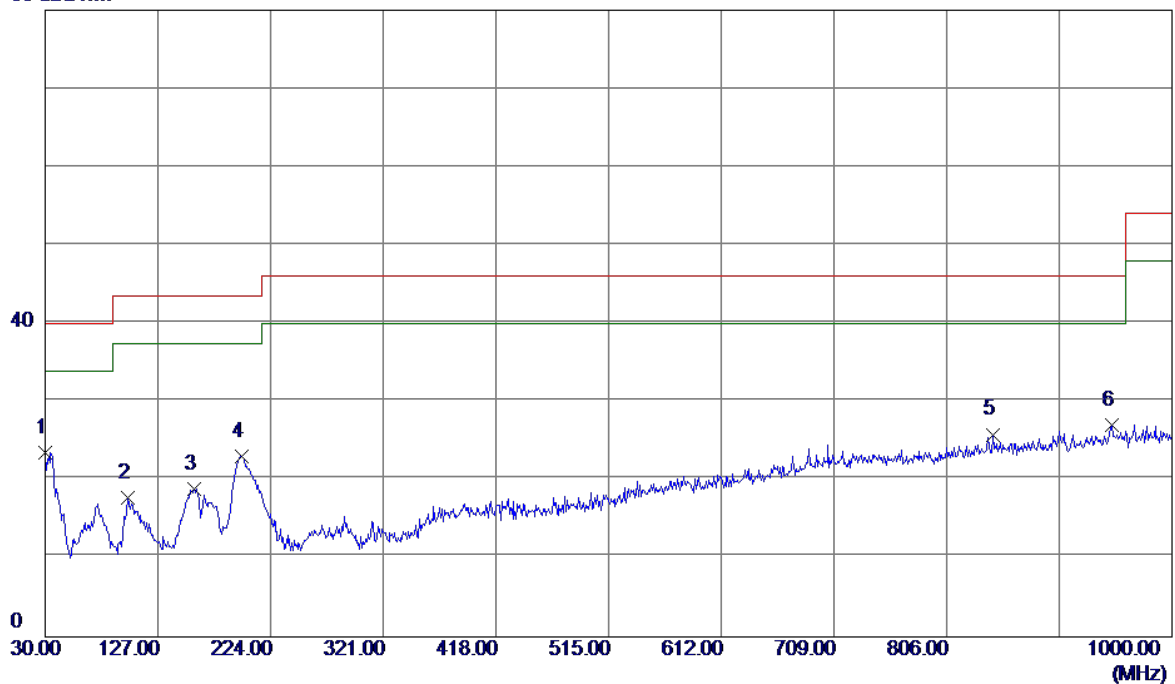

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector
1 *	30.0000	34.48	-10.89	23.59	40.00	-16.41	QP
2	100.8100	39.47	-21.66	17.81	43.50	-25.69	QP
3	158.0399	41.03	-22.10	18.93	43.50	-24.57	QP
4	198.7800	42.92	-19.84	23.08	43.50	-20.42	QP
5	845.7700	30.21	-4.37	25.84	46.00	-20.16	QP
6	948.5900	30.07	-3.06	27.01	46.00	-18.99	QP

EUT	HUAWEI MediaPad T3 7.0 (MediaPad T3 7.0 for short)	Model Name	BG2-W09
Temperature	25°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz	Polarization	Vertical
Test Mode	Adapter+Speaker+Playing		
Note	Adapter:PHITEK+USB Cable:Luxshare		
Test Engineer	Kevin Li		


80 dBuV/m

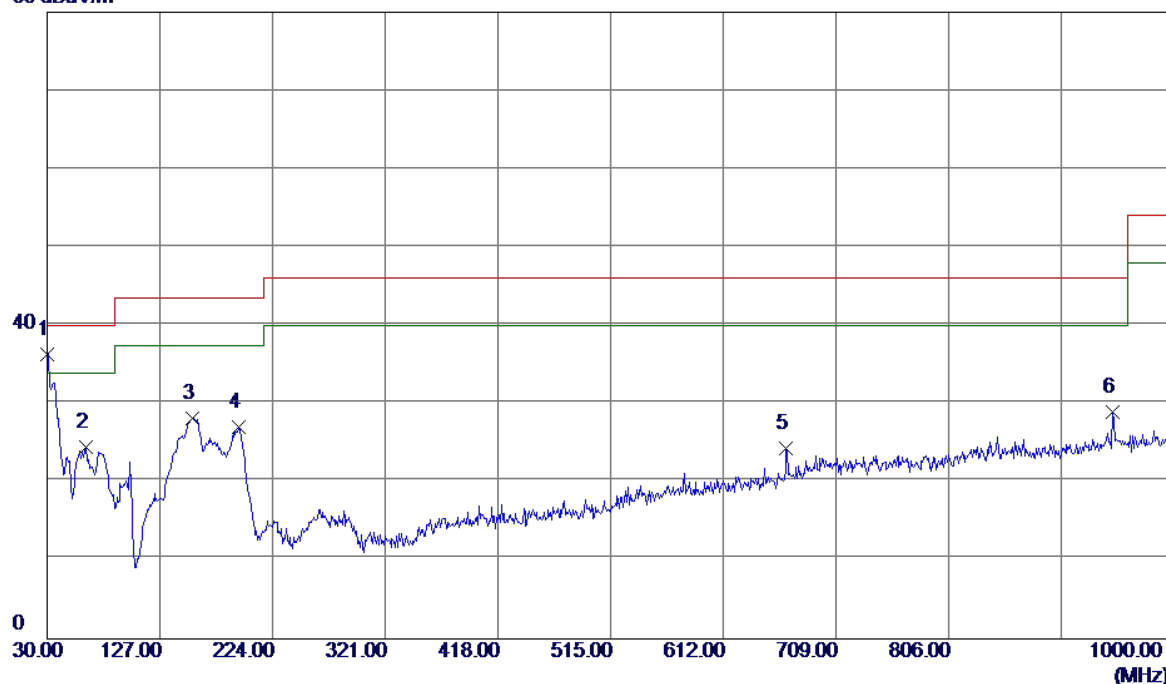

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector
1 *	30.0000	47.17	-10.89	36.28	40.00	-3.72	QP
2	62.9800	47.30	-22.84	24.46	40.00	-15.54	QP
3	155.1300	50.27	-22.06	28.21	43.50	-15.29	QP
4	194.9000	47.54	-20.44	27.10	43.50	-16.40	QP
5	666.3200	31.68	-7.39	24.29	46.00	-21.71	QP
6	947.6200	32.09	-3.09	29.00	46.00	-17.00	QP

EUT	HUAWEI MediaPad T3 7.0 (MediaPad T3 7.0 for short)	Model Name	BG2-W09
Temperature	25°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz	Polarization	Horizontal
Test Mode	Adapter+Speaker+Playing		
Note	Adapter:PHITEK+USB Cable:Luxshare		
Test Engineer	Kevin Li		

80 dBuV/m

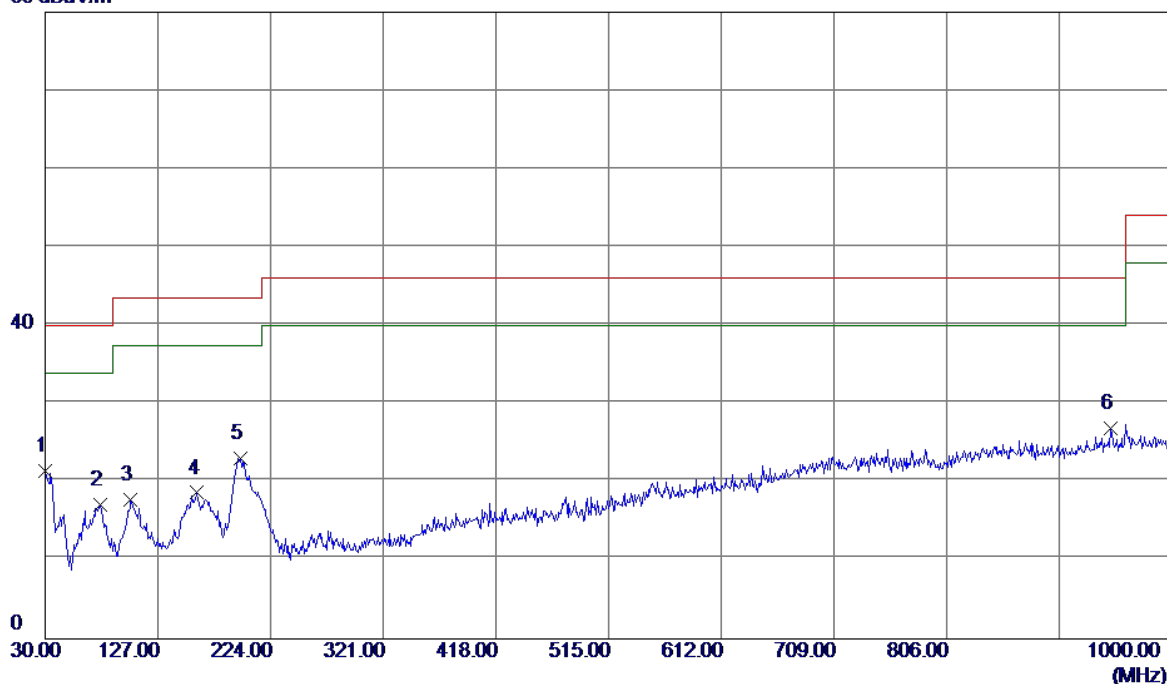

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector
1 *	30.0000	32.27	-10.89	21.38	40.00	-18.62	QP
2	77.5300	40.88	-23.73	17.15	40.00	-22.85	QP
3	103.7200	39.56	-21.79	17.77	43.50	-25.73	QP
4	160.9500	40.70	-22.06	18.64	43.50	-24.86	QP
5	197.8100	43.06	-19.99	23.07	43.50	-20.43	QP
6	947.6200	29.96	-3.09	26.87	46.00	-19.13	QP


4.2.7 TEST RESULTS-ABOVE 1GHZ

Remark :

- (1) All readings are Peak unless otherwise stated QP in column of『Note』. Peak denotes that the Peak reading compliance with the QP Limits and then QP Mode measurement didn't perform.
- (2) Radiated emissions measured in frequency range above 1000MHz were made with an instrument using Peak detector mode and AV detector mode of the emission.
- (3) Data of measurement within this frequency range shown “ * ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (4) A preamp and high pass filter were used for this test in order to provide sufficient measurement sensitivity.


EUT	HUAWEI MediaPad T3 7.0 (MediaPad T3 7.0 for short)	Model Name	BG2-W09
Temperature	25°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz	Polarization	Vertical
Test Mode	USB copy(EUT with PC)+Earphone		
Note	USB Cable:Luxshare+Earphone:LIANCHUANG		
Test Engineer	Kevin Li		

80 dBuV/m

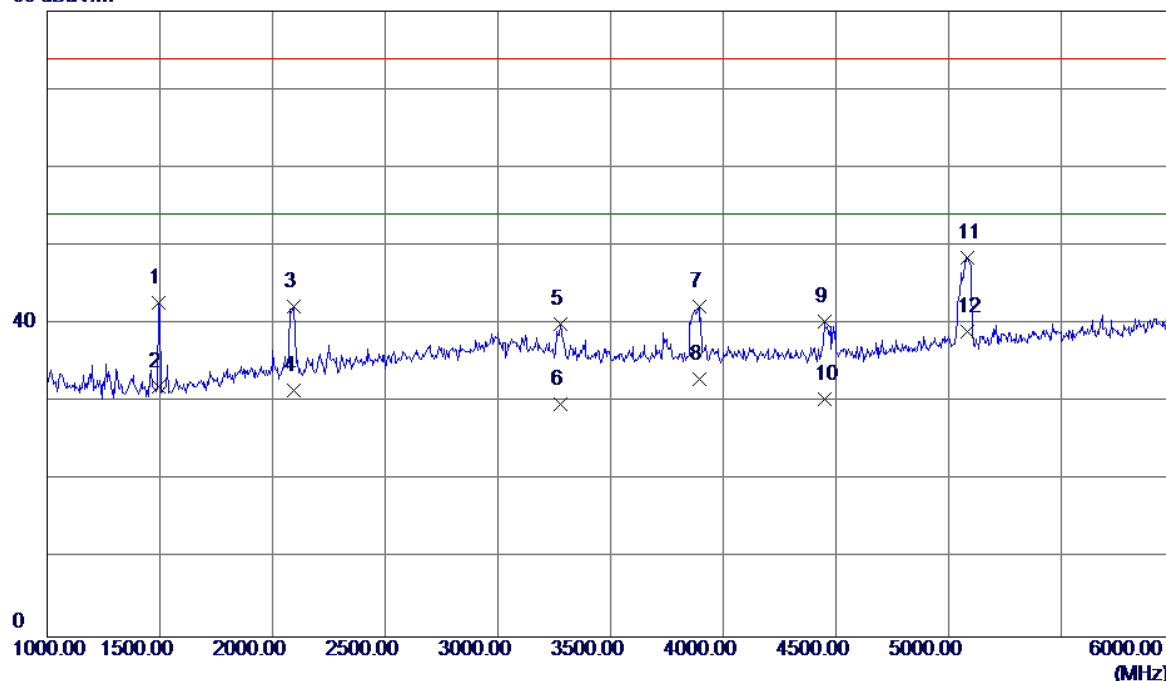

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector
1	1492.5000	49.46	-6.72	42.74	74.00	-31.26	Peak
2	1492.5000	38.73	-6.72	32.01	54.00	-21.99	AVG
3	2095.0000	44.75	-2.45	42.30	74.00	-31.70	Peak
4	2095.0000	33.93	-2.45	31.48	54.00	-22.52	AVG
5	3277.5000	38.47	1.58	40.05	74.00	-33.95	Peak
6	3277.5000	28.20	1.58	29.78	54.00	-24.22	AVG
7	3892.5000	39.58	2.71	42.29	74.00	-31.71	Peak
8	3892.5000	30.31	2.71	33.02	54.00	-20.98	AVG
9	4447.5000	36.90	3.48	40.38	74.00	-33.62	Peak
10	4447.5000	26.97	3.48	30.45	54.00	-23.55	AVG
11	5085.0000	42.62	5.88	48.50	74.00	-25.50	Peak
12 *	5085.0000	33.22	5.88	39.10	54.00	-14.90	AVG


EUT	HUAWEI MediaPad T3 7.0 (MediaPad T3 7.0 for short)	Model Name	BG2-W09
Temperature	25°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz	Polarization	Horizontal
Test Mode	USB copy(EUT with PC)+Earphone		
Note	USB Cable:Luxshare+Earphone:LIANCHUANG		
Test Engineer	Kevin Li		

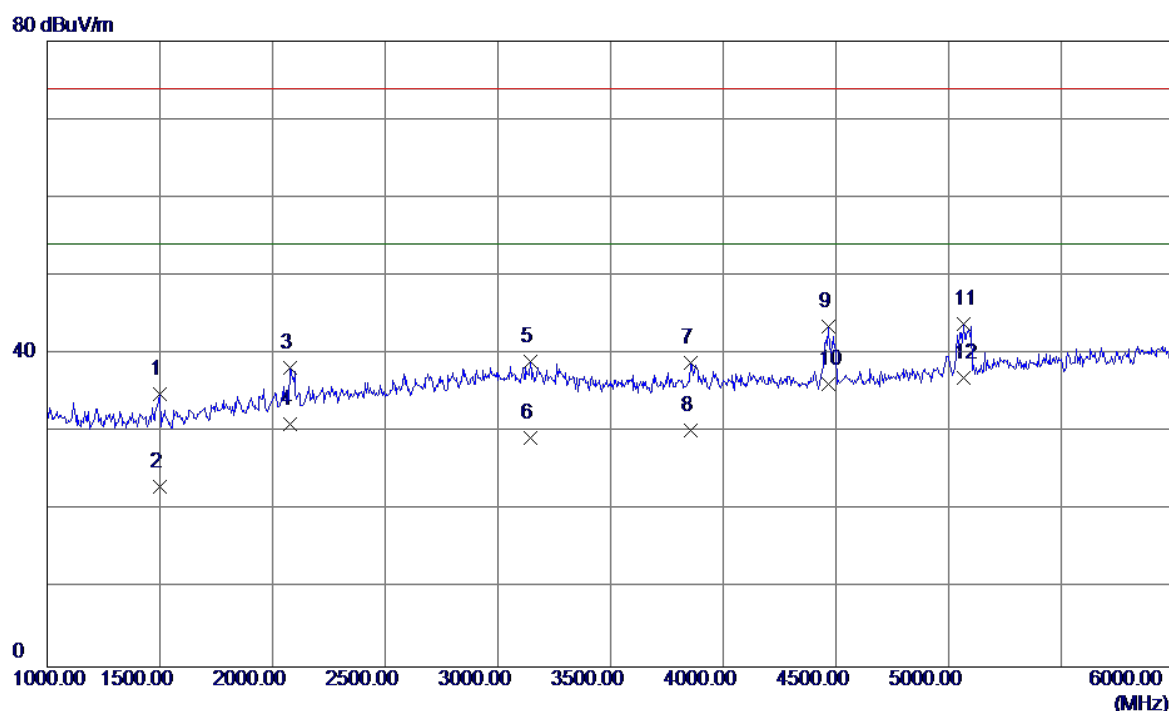

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector
1	1500.0000	41.57	-6.70	34.87	74.00	-39.13	Peak
2	1500.0000	29.70	-6.70	23.00	54.00	-31.00	AVG
3	2077.5000	40.72	-2.52	38.20	74.00	-35.80	Peak
4	2077.5000	33.56	-2.52	31.04	54.00	-22.96	AVG
5	3142.5000	37.33	1.65	38.98	74.00	-35.02	Peak
6	3142.5000	27.58	1.65	29.23	54.00	-24.77	AVG
7	3855.0000	36.24	2.59	38.83	74.00	-35.17	Peak
8	3855.0000	27.66	2.59	30.25	54.00	-23.75	AVG
9	4467.5000	39.96	3.50	43.46	74.00	-30.54	Peak
10	4467.5000	32.73	3.50	36.23	54.00	-17.77	AVG
11	5067.5000	37.98	5.82	43.80	74.00	-30.20	Peak
12 *	5067.5000	31.18	5.82	37.00	54.00	-17.00	AVG

EUT	HUAWEI MediaPad T3 7.0 (MediaPad T3 7.0 for short)	Model Name	BG2-W09
Temperature	25°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz	Polarization	Vertical
Test Mode	USB copy(EUT with PC)+Earphone		
Note	USB Cable:FOXCONN+Earphone:QUANCHENG		
Test Engineer	Kevin Li		


80 dBuV/m

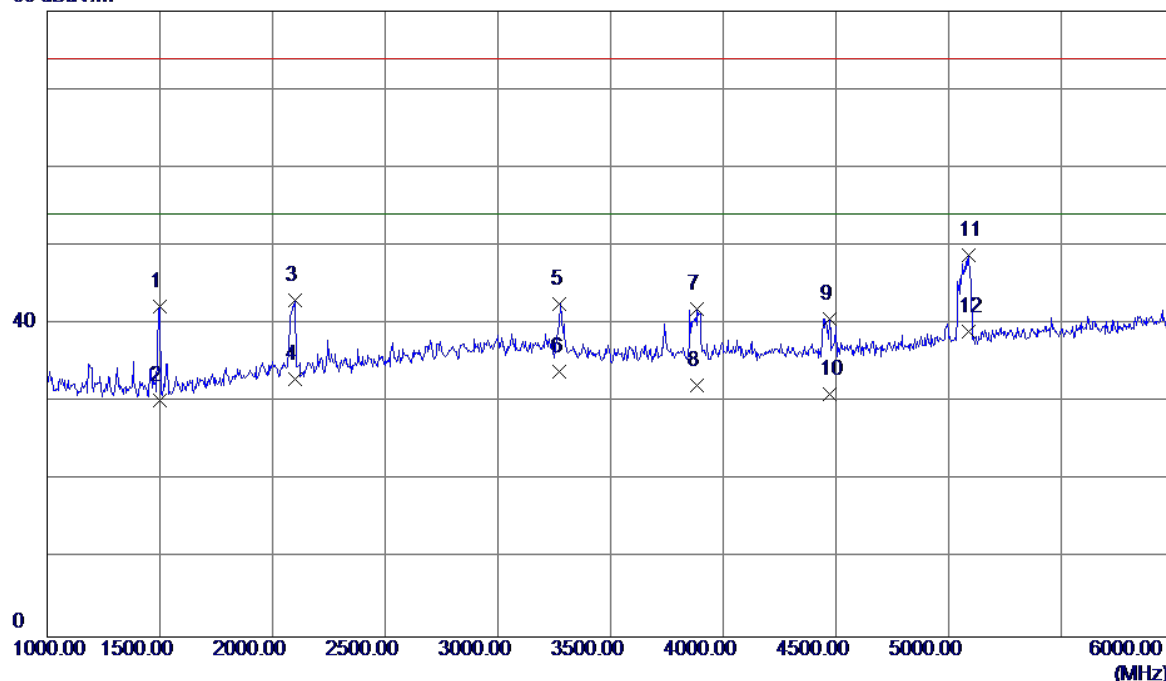

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector
1	1500.0000	49.01	-6.70	42.31	74.00	-31.69	Peak
2	1500.0000	36.94	-6.70	30.24	54.00	-23.76	AVG
3	2100.0000	45.40	-2.43	42.97	74.00	-31.03	Peak
4	2100.0000	35.42	-2.43	32.99	54.00	-21.01	AVG
5	3275.0000	40.94	1.58	42.52	74.00	-31.48	Peak
6	3275.0000	32.27	1.58	33.85	54.00	-20.15	AVG
7	3885.0000	39.21	2.69	41.90	74.00	-32.10	Peak
8	3885.0000	29.41	2.69	32.10	54.00	-21.90	AVG
9	4470.0000	37.12	3.50	40.62	74.00	-33.38	Peak
10	4470.0000	27.52	3.50	31.02	54.00	-22.98	AVG
11	5090.0000	42.97	5.90	48.87	74.00	-25.13	Peak
12 *	5090.0000	33.10	5.90	39.00	54.00	-15.00	AVG

EUT	HUAWEI MediaPad T3 7.0 (MediaPad T3 7.0 for short)	Model Name	BG2-W09
Temperature	25°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz	Polarization	Horizontal
Test Mode	USB copy(EUT with PC)+Earphone		
Note	USB Cable:FOXCONN+Earphone:QUANCHENG		
Test Engineer	Kevin Li		


80 dBuV/m

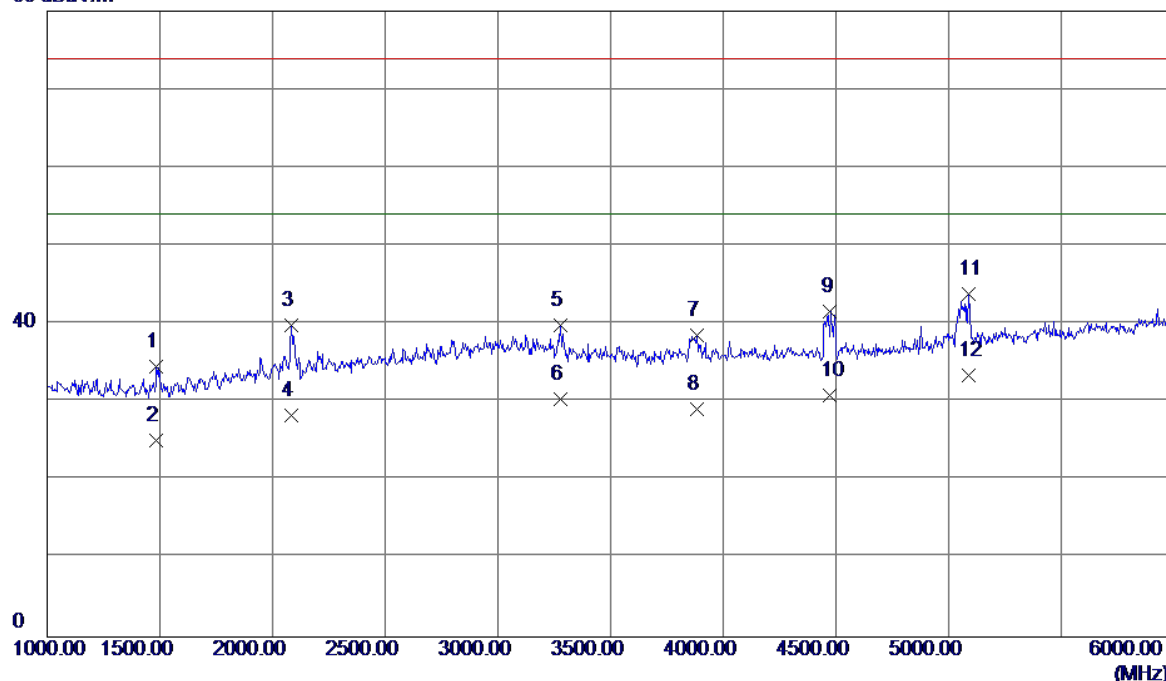

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector
1	1485.0000	41.27	-6.74	34.53	74.00	-39.47	Peak
2	1485.0000	31.90	-6.74	25.16	54.00	-28.84	AVG
3	2085.0000	42.30	-2.49	39.81	74.00	-34.19	Peak
4	2085.0000	30.83	-2.49	28.34	54.00	-25.66	AVG
5	3277.5000	38.26	1.58	39.84	74.00	-34.16	Peak
6	3277.5000	28.84	1.58	30.42	54.00	-23.58	AVG
7	3882.5000	35.95	2.68	38.63	74.00	-35.37	Peak
8	3882.5000	26.43	2.68	29.11	54.00	-24.89	AVG
9	4475.0000	38.14	3.51	41.65	74.00	-32.35	Peak
10	4475.0000	27.37	3.51	30.88	54.00	-23.12	AVG
11	5090.0000	37.87	5.90	43.77	74.00	-30.23	Peak
12 *	5090.0000	27.56	5.90	33.46	54.00	-20.54	AVG

EUT	HUAWEI MediaPad T3 7.0 (MediaPad T3 7.0 for short)	Model Name	BG2-W09
Temperature	25°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz	Polarization	Vertical
Test Mode	USB copy(EUT with PC)+Earphone		
Note	USB Cable:HONGLIN+Earphone:GoerTek		
Test Engineer	Kevin Li		


80 dBuV/m

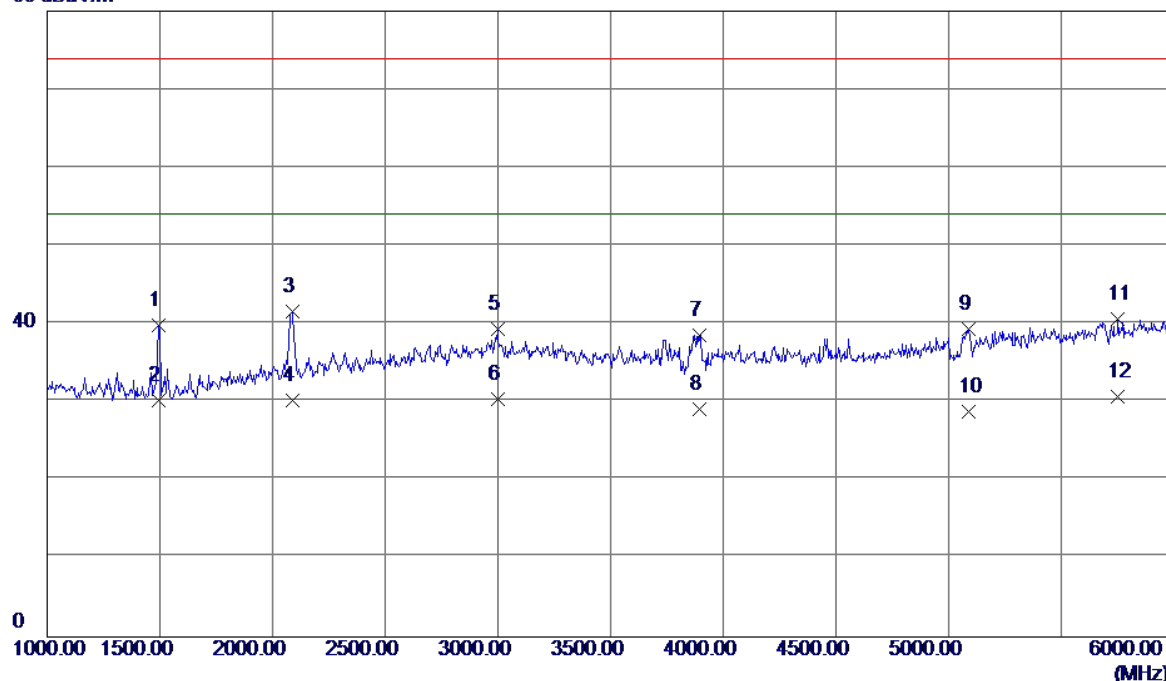

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector
1	1492.5000	46.62	-6.72	39.90	74.00	-34.10	Peak
2	1492.5000	36.97	-6.72	30.25	54.00	-23.75	AVG
3	2087.5000	44.03	-2.48	41.55	74.00	-32.45	Peak
4	2087.5000	32.71	-2.48	30.23	54.00	-23.77	AVG
5	2997.5000	37.67	1.72	39.39	74.00	-34.61	Peak
6	2997.5000	28.73	1.72	30.45	54.00	-23.55	AVG
7	3892.5000	35.92	2.71	38.63	74.00	-35.37	Peak
8	3892.5000	26.41	2.71	29.12	54.00	-24.88	AVG
9	5087.5000	33.50	5.89	39.39	74.00	-34.61	Peak
10	5087.5000	22.88	5.89	28.77	54.00	-25.23	AVG
11	5752.5000	32.53	8.16	40.69	74.00	-33.31	Peak
12 *	5752.5000	22.62	8.16	30.78	54.00	-23.22	AVG

EUT	HUAWEI MediaPad T3 7.0 (MediaPad T3 7.0 for short)	Model Name	BG2-W09
Temperature	25°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz	Polarization	Horizontal
Test Mode	USB copy(EUT with PC)+Earphone		
Note	USB Cable:HONGLIN+Earphone:GoerTek		
Test Engineer	Kevin Li		


80 dBuV/m

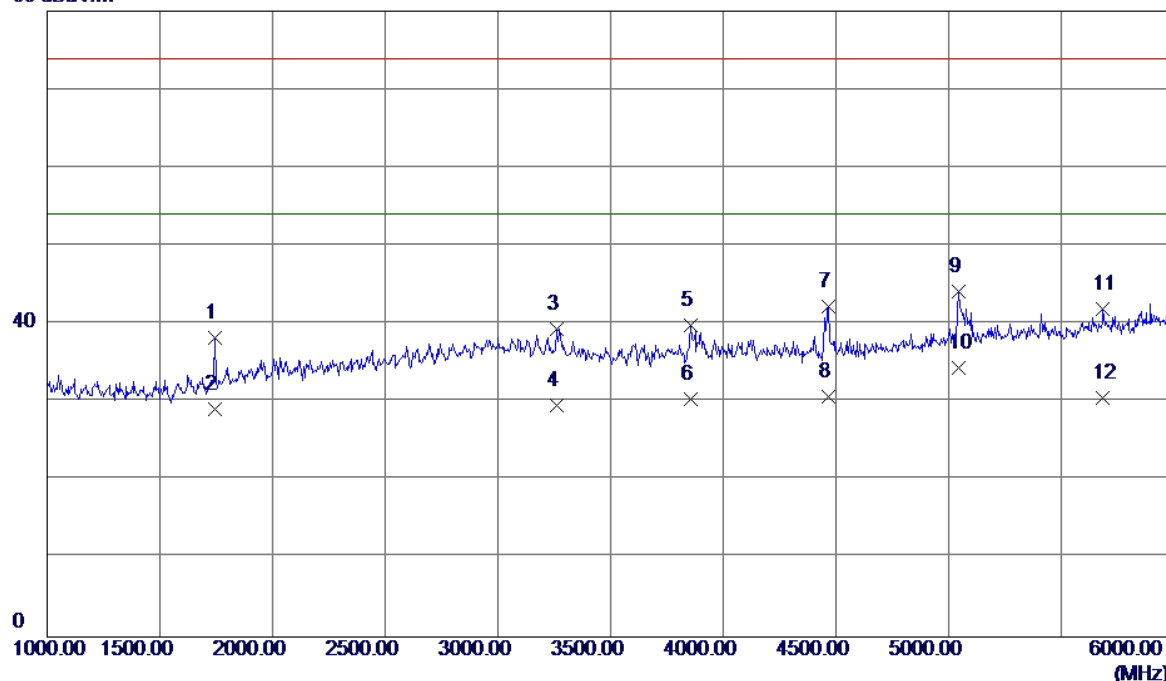

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector
1	1745.0000	42.99	-4.80	38.19	74.00	-35.81	Peak
2	1745.0000	33.91	-4.80	29.11	54.00	-24.89	AVG
3	3260.0000	37.84	1.59	39.43	74.00	-34.57	Peak
4	3260.0000	27.95	1.59	29.54	54.00	-24.46	AVG
5	3855.0000	37.22	2.59	39.81	74.00	-34.19	Peak
6	3855.0000	27.86	2.59	30.45	54.00	-23.55	AVG
7	4465.0000	38.73	3.50	42.23	74.00	-31.77	Peak
8	4465.0000	27.28	3.50	30.78	54.00	-23.22	AVG
9	5042.5000	38.46	5.74	44.20	74.00	-29.80	Peak
10 *	5042.5000	28.71	5.74	34.45	54.00	-19.55	AVG
11	5685.0000	33.96	7.92	41.88	74.00	-32.12	Peak
12	5685.0000	22.64	7.92	30.56	54.00	-23.44	AVG

EUT	HUAWEI MediaPad T3 7.0 (MediaPad T3 7.0 for short)	Model Name	BG2-W09
Temperature	25°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz	Polarization	Vertical
Test Mode	Adapter+Earphone+Camera on+2.4G WiFi+GPS+Bluetooth		
Note	Adapter:PHITEK+USB Cable:Luxshare+Earphone:LIANCHUANG		
Test Engineer	Kevin Li		


80 dBuV/m

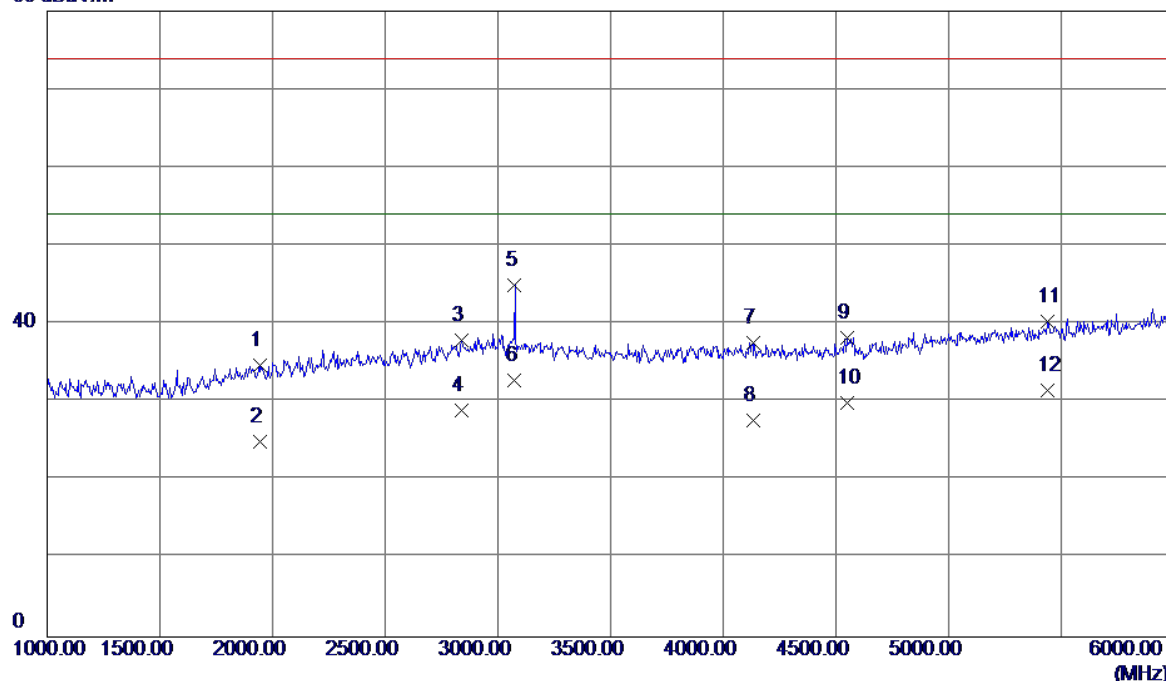

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector
1	1942.5000	38.01	-3.27	34.74	74.00	-39.26	Peak
2	1942.5000	28.16	-3.27	24.89	54.00	-29.11	AVG
3	2837.5000	37.02	0.88	37.90	74.00	-36.10	Peak
4	2837.5000	28.11	0.88	28.99	54.00	-25.01	AVG
5	3075.0000	43.24	1.69	44.93	74.00	-29.07	Peak
6 *	3075.0000	31.13	1.69	32.82	54.00	-21.18	AVG
7	4132.5000	34.49	3.18	37.67	74.00	-36.33	Peak
8	4132.5000	24.47	3.18	27.65	54.00	-26.35	AVG
9	4547.5000	34.58	3.73	38.31	74.00	-35.69	Peak
10	4547.5000	26.13	3.73	29.86	54.00	-24.14	AVG
11	5440.0000	33.26	7.06	40.32	74.00	-33.68	Peak
12	5440.0000	24.39	7.06	31.45	54.00	-22.55	AVG

EUT	HUAWEI MediaPad T3 7.0 (MediaPad T3 7.0 for short)	Model Name	BG2-W09
Temperature	25°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz	Polarization	Horizontal
Test Mode	Adapter+Earphone+Camera on+2.4G WiFi+GPS+Bluetooth		
Note	Adapter:PHITEK+USB Cable:Luxshare+Earphone:LIANCHUANG		
Test Engineer	Kevin Li		


80 dBuV/m

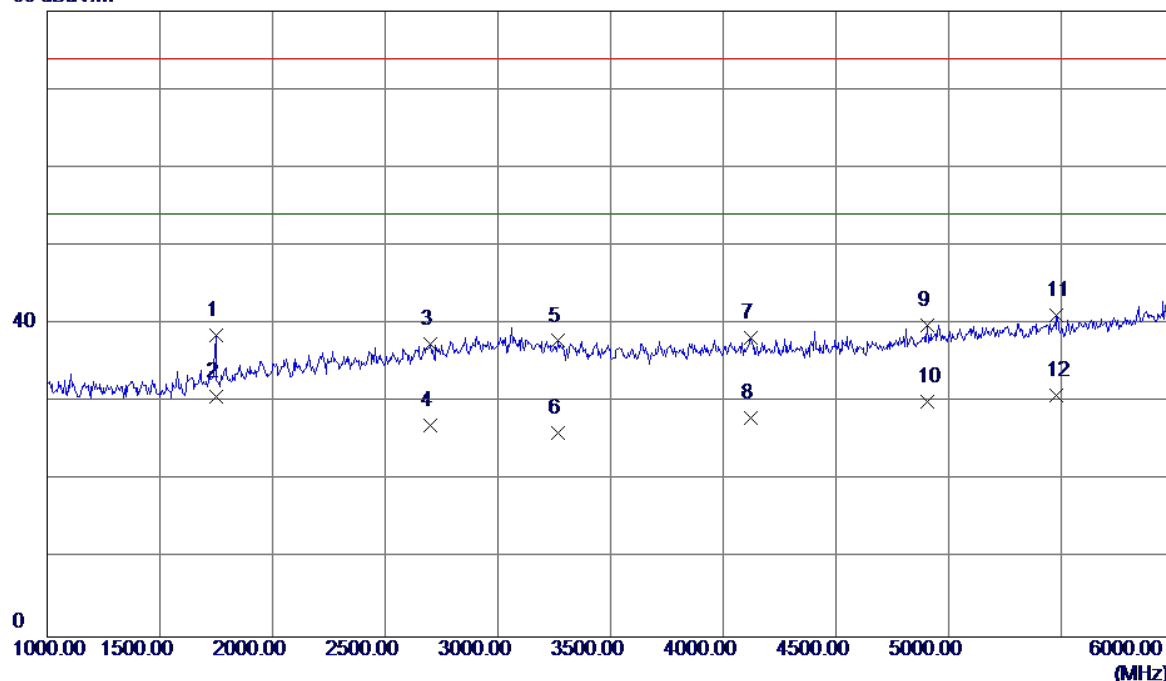

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector
1	1747.5000	43.33	-4.78	38.55	74.00	-35.45	Peak
2	1747.5000	35.50	-4.78	30.72	54.00	-23.28	AVG
3	2702.5000	37.30	0.18	37.48	74.00	-36.52	Peak
4	2702.5000	26.85	0.18	27.03	54.00	-26.97	AVG
5	3265.0000	36.25	1.59	37.84	74.00	-36.16	Peak
6	3265.0000	24.56	1.59	26.15	54.00	-27.85	AVG
7	4122.5000	35.03	3.17	38.20	74.00	-35.80	Peak
8	4122.5000	24.79	3.17	27.96	54.00	-26.04	AVG
9	4907.5000	34.69	5.22	39.91	74.00	-34.09	Peak
10	4907.5000	24.90	5.22	30.12	54.00	-23.88	AVG
11	5480.0000	33.97	7.19	41.16	74.00	-32.84	Peak
12 *	5480.0000	23.69	7.19	30.88	54.00	-23.12	AVG

EUT	HUAWEI MediaPad T3 7.0 (MediaPad T3 7.0 for short)	Model Name	BG2-W09
Temperature	25°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz	Polarization	Vertical
Test Mode	Adapter+Earphone+Camera on+2.4G WiFi+GPS+Bluetooth		
Note	Adapter:PHITEK+USB Cable:Luxshare+Earphone:LIANCHUANG		
Test Engineer	Kevin Li		


80 dBuV/m

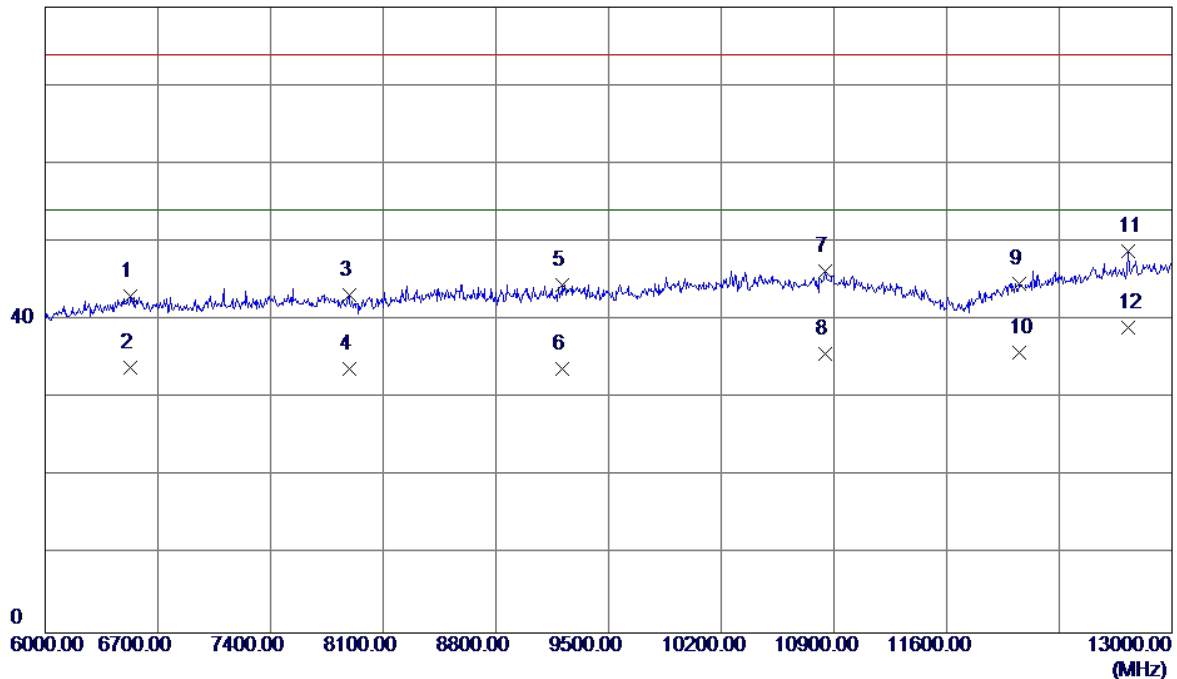

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector
1	6532.0000	32.18	10.87	43.05	74.00	-30.95	Peak
2	6532.0000	23.02	10.87	33.89	54.00	-20.11	AVG
3	7886.5000	31.46	11.81	43.27	74.00	-30.73	Peak
4	7886.5000	21.97	11.81	33.78	54.00	-20.22	AVG
5	9213.0000	31.00	13.42	44.42	74.00	-29.58	Peak
6	9213.0000	20.30	13.42	33.72	54.00	-20.28	AVG
7	10847.5000	30.14	16.10	46.24	74.00	-27.76	Peak
8	10847.5000	19.52	16.10	35.62	54.00	-18.38	AVG
9	12051.5000	28.56	16.11	44.67	74.00	-29.33	Peak
10	12051.5000	19.67	16.11	35.78	54.00	-18.22	AVG
11	12727.0000	31.39	17.46	48.85	74.00	-25.15	Peak
12 *	12727.0000	21.53	17.46	38.99	54.00	-15.01	AVG

EUT	HUAWEI MediaPad T3 7.0 (MediaPad T3 7.0 for short)	Model Name	BG2-W09
Temperature	25°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz	Polarization	Horizontal
Test Mode	Adapter+Earphone+Camera on+2.4G WiFi+GPS+Bluetooth		
Note	Adapter:PHITEK+USB Cable:Luxshare+Earphone:LIANCHUANG		
Test Engineer	Kevin Li		


80 dBuV/m

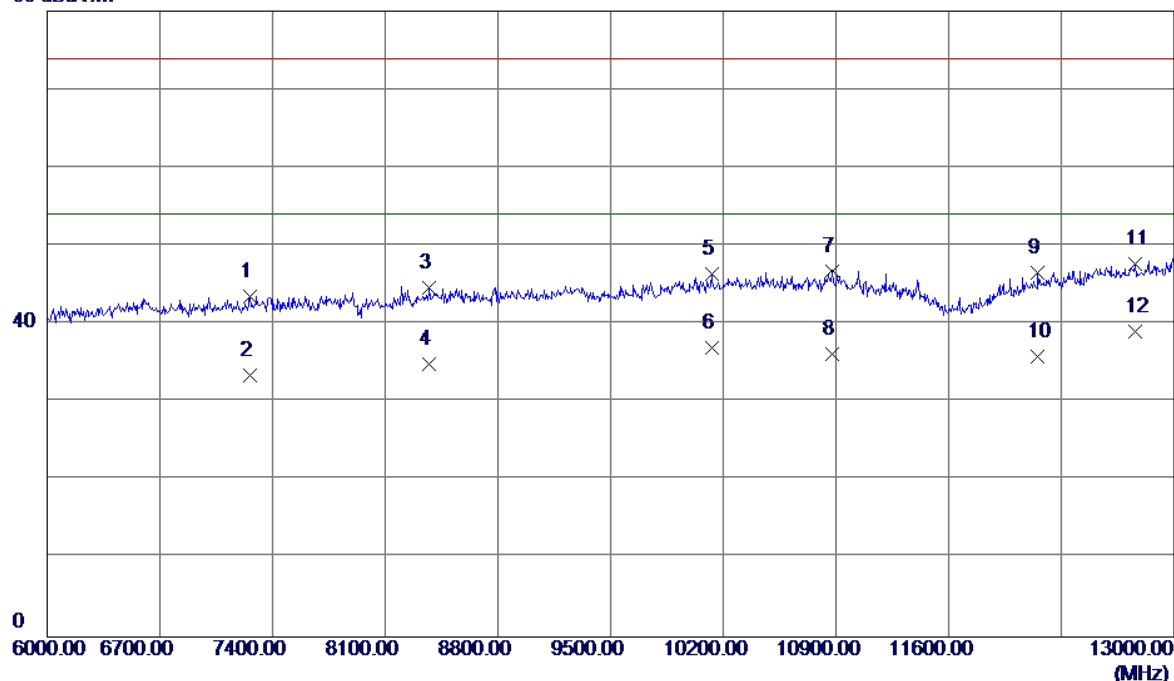

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector
1	7260.0000	32.25	11.22	43.47	74.00	-30.53	Peak
2	7260.0000	22.23	11.22	33.45	54.00	-20.55	AVG
3	8373.0000	31.79	12.78	44.57	74.00	-29.43	Peak
4	8373.0000	22.10	12.78	34.88	54.00	-19.12	AVG
5	10126.5000	31.69	14.64	46.33	74.00	-27.67	Peak
6	10126.5000	22.25	14.64	36.89	54.00	-17.11	AVG
7	10879.0000	30.65	16.15	46.80	74.00	-27.20	Peak
8	10879.0000	20.02	16.15	36.17	54.00	-17.83	AVG
9	12153.0000	30.33	16.27	46.60	74.00	-27.40	Peak
10	12153.0000	19.62	16.27	35.89	54.00	-18.11	AVG
11	12758.5000	30.11	17.55	47.66	74.00	-26.34	Peak
12 *	12758.5000	21.42	17.55	38.97	54.00	-15.03	AVG

EUT	HUAWEI MediaPad T3 7.0 (MediaPad T3 7.0 for short)	Model Name	BG2-W09
Temperature	25°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz	Polarization	Vertical
Test Mode	Adapter+Earphone+Camera on+2.4G WiFi+GPS+Bluetooth		
Note	Adapter:HUNTKEY+USB Cable:Luxshare+Earphone:LIANCHUANG		
Test Engineer	Kevin Li		


80 dBuV/m

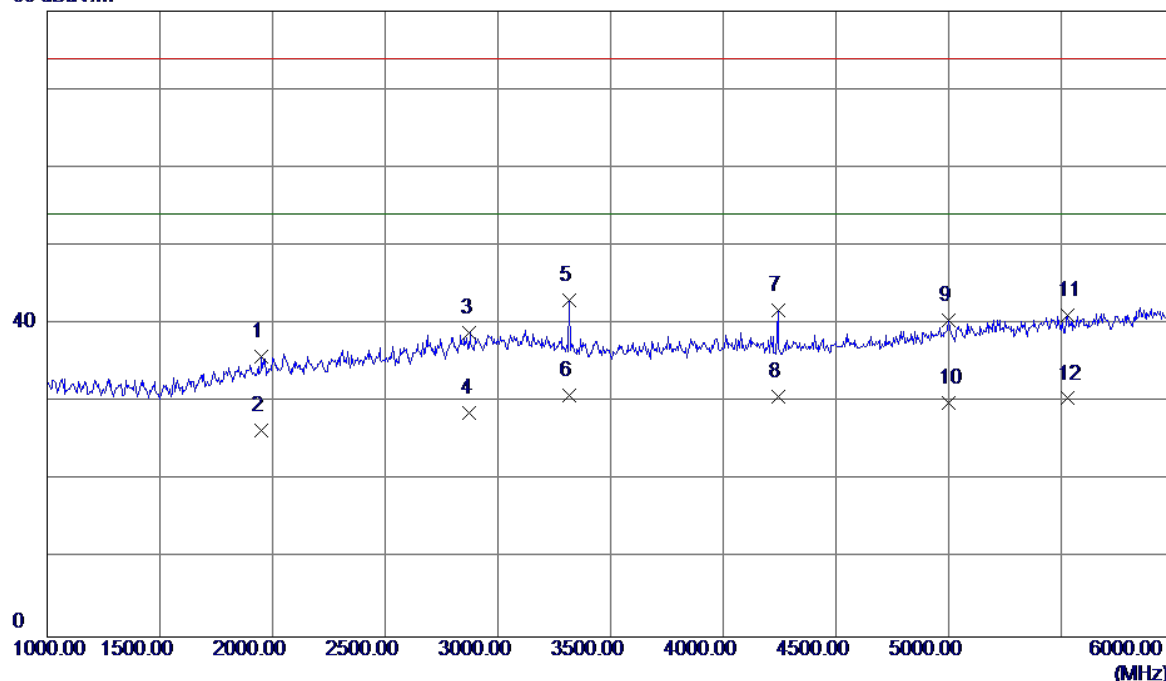

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector
1	1950.0000	38.98	-3.21	35.77	74.00	-38.23	Peak
2	1950.0000	29.65	-3.21	26.44	54.00	-27.56	AVG
3	2875.0000	37.85	1.08	38.93	74.00	-35.07	Peak
4	2875.0000	27.56	1.08	28.64	54.00	-25.36	AVG
5	3317.5000	41.43	1.56	42.99	74.00	-31.01	Peak
6 *	3317.5000	29.25	1.56	30.81	54.00	-23.19	AVG
7	4242.5000	38.55	3.28	41.83	74.00	-32.17	Peak
8	4242.5000	27.46	3.28	30.74	54.00	-23.26	AVG
9	5002.5000	34.88	5.61	40.49	74.00	-33.51	Peak
10	5002.5000	24.28	5.61	29.89	54.00	-24.11	AVG
11	5527.5000	33.77	7.36	41.13	74.00	-32.87	Peak
12	5527.5000	23.12	7.36	30.48	54.00	-23.52	AVG

EUT	HUAWEI MediaPad T3 7.0 (MediaPad T3 7.0 for short)	Model Name	BG2-W09
Temperature	25°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz	Polarization	Horizontal
Test Mode	Adapter+Earphone+Camera on+2.4G WiFi+GPS+Bluetooth		
Note	Adapter:HUNTKEY+USB Cable:Luxshare+Earphone:LIANCHUANG		
Test Engineer	Kevin Li		


80 dBuV/m

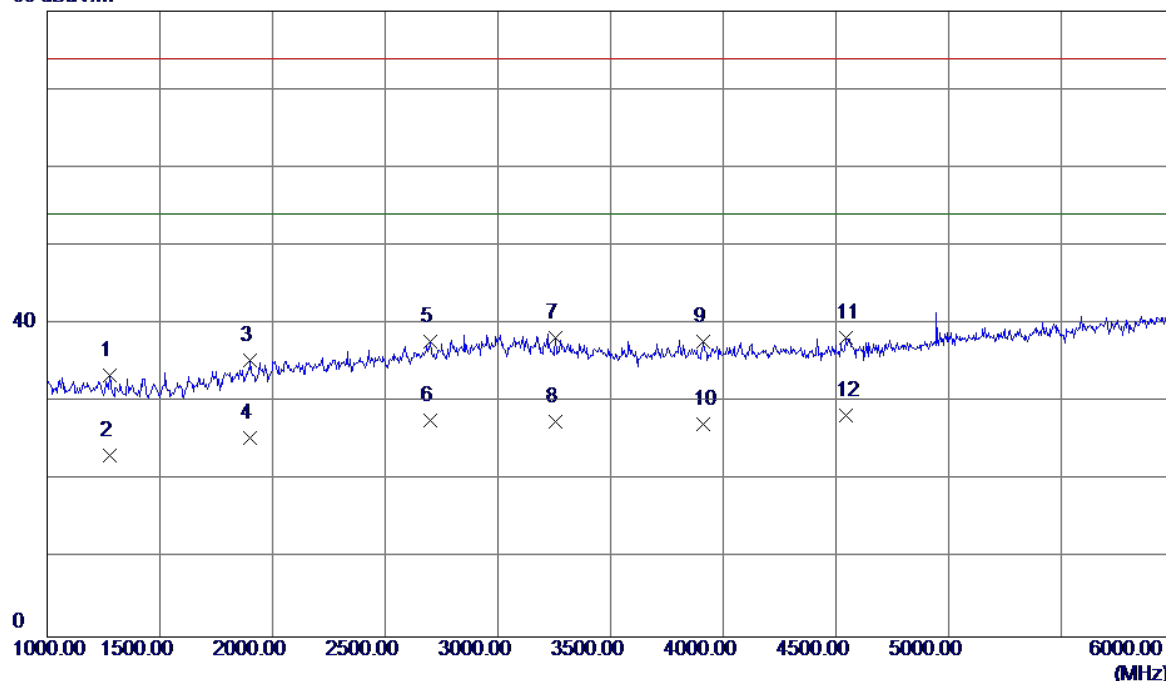

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector
1	1277.5000	40.66	-7.29	33.37	74.00	-40.63	Peak
2	1277.5000	30.50	-7.29	23.21	54.00	-30.79	AVG
3	1900.0000	38.95	-3.60	35.35	74.00	-38.65	Peak
4	1900.0000	29.08	-3.60	25.48	54.00	-28.52	AVG
5	2700.0000	37.65	0.17	37.82	74.00	-36.18	Peak
6	2700.0000	27.44	0.17	27.61	54.00	-26.39	AVG
7	3255.0000	36.70	1.59	38.29	74.00	-35.71	Peak
8	3255.0000	26.00	1.59	27.59	54.00	-26.41	AVG
9	3910.0000	34.97	2.76	37.73	74.00	-36.27	Peak
10	3910.0000	24.39	2.76	27.15	54.00	-26.85	AVG
11	4545.0000	34.56	3.72	38.28	74.00	-35.72	Peak
12 *	4545.0000	24.62	3.72	28.34	54.00	-25.66	AVG

EUT	HUAWEI MediaPad T3 7.0 (MediaPad T3 7.0 for short)	Model Name	BG2-W09
Temperature	25°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz	Polarization	Vertical
Test Mode	Adapter+Earphone+Camera on+2.4G WiFi+GPS+Bluetooth		
Note	Adapter:BYD+USB Cable:Luxshare+Earphone:LIANCHUANG		
Test Engineer	Kevin Li		


80 dBuV/m

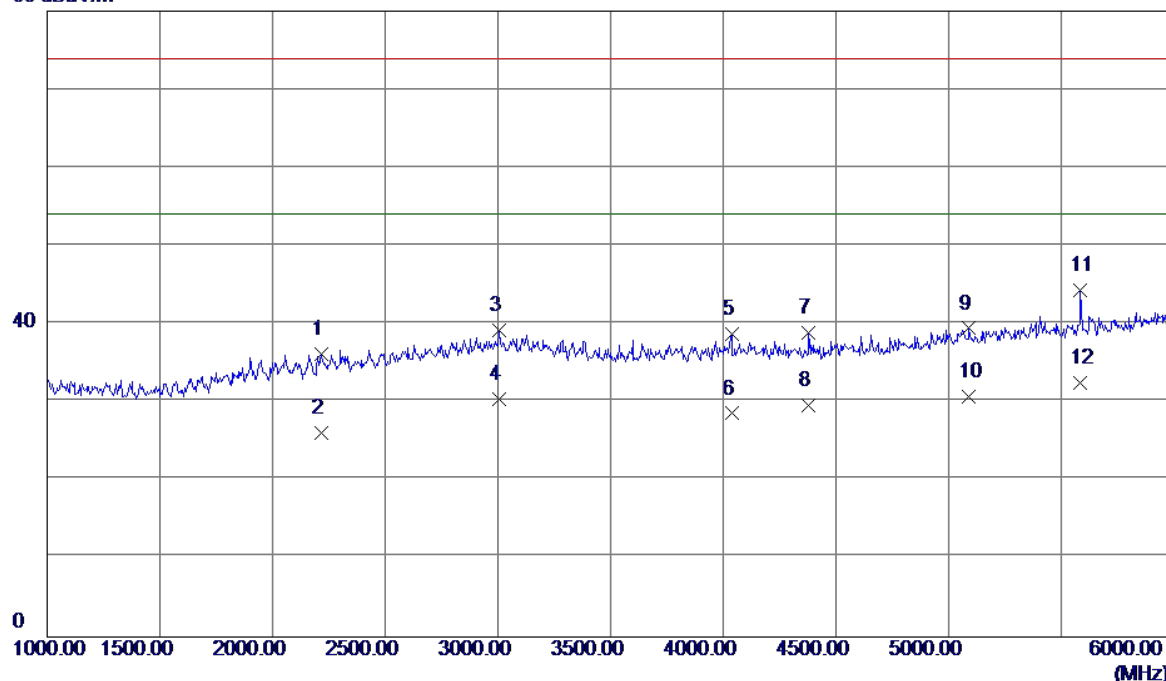

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector
1	2217.5000	38.09	-1.97	36.12	74.00	-37.88	Peak
2	2217.5000	28.06	-1.97	26.09	54.00	-27.91	AVG
3	3005.0000	37.44	1.73	39.17	74.00	-34.83	Peak
4	3005.0000	28.71	1.73	30.44	54.00	-23.56	AVG
5	4037.5000	35.57	3.09	38.66	74.00	-35.34	Peak
6	4037.5000	25.47	3.09	28.56	54.00	-25.44	AVG
7	4380.0000	35.51	3.41	38.92	74.00	-35.08	Peak
8	4380.0000	26.15	3.41	29.56	54.00	-24.44	AVG
9	5090.0000	33.54	5.90	39.44	74.00	-34.56	Peak
10	5090.0000	24.88	5.90	30.78	54.00	-23.22	AVG
11	5585.0000	36.75	7.56	44.31	74.00	-29.69	Peak
12 *	5585.0000	24.99	7.56	32.55	54.00	-21.45	AVG


EUT	HUAWEI MediaPad T3 7.0 (MediaPad T3 7.0 for short)	Model Name	BG2-W09
Temperature	25°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz	Polarization	Horizontal
Test Mode	Adapter+Earphone+Camera on+2.4G WiFi+GPS+Bluetooth		
Note	Adapter:BYD+USB Cable:Luxshare+Earphone:LIANCHUANG		
Test Engineer	Kevin Li		

80 dBuV/m

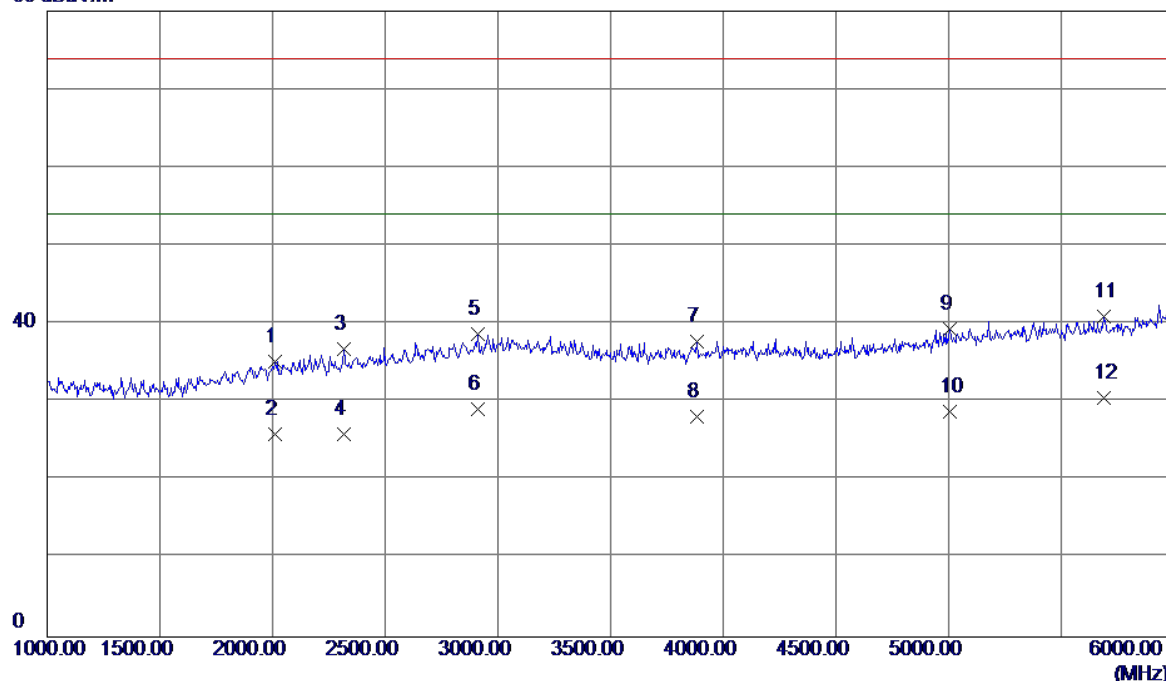

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector
1	2012.5000	37.91	-2.77	35.14	74.00	-38.86	Peak
2	2012.5000	28.65	-2.77	25.88	54.00	-28.12	AVG
3	2317.5000	38.41	-1.58	36.83	74.00	-37.17	Peak
4	2317.5000	27.47	-1.58	25.89	54.00	-28.11	AVG
5	2910.0000	37.40	1.26	38.66	74.00	-35.34	Peak
6	2910.0000	27.88	1.26	29.14	54.00	-24.86	AVG
7	3882.5000	35.08	2.68	37.76	74.00	-36.24	Peak
8	3882.5000	25.48	2.68	28.16	54.00	-25.84	AVG
9	5005.0000	33.81	5.62	39.43	74.00	-34.57	Peak
10	5005.0000	23.24	5.62	28.86	54.00	-25.14	AVG
11	5690.0000	32.95	7.94	40.89	74.00	-33.11	Peak
12 *	5690.0000	22.58	7.94	30.52	54.00	-23.48	AVG


EUT	HUAWEI MediaPad T3 7.0 (MediaPad T3 7.0 for short)	Model Name	BG2-W09
Temperature	25°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz	Polarization	Vertical
Test Mode	Adapter+Earphone+Camera on+5G WiFi+GPS+Bluetooth		
Note	Adapter:PHITEK+USB Cable:Luxshare+Earphone:LIANCHUANG		
Test Engineer	Kevin Li		

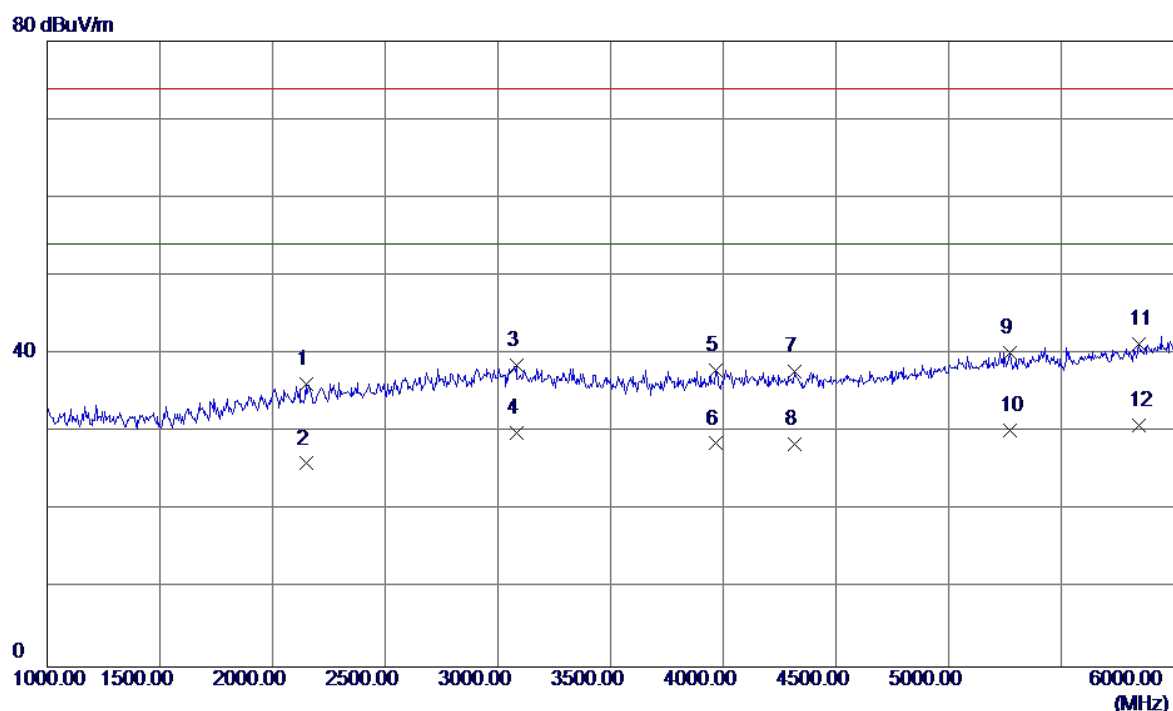

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector
1	2147.5000	38.42	-2.24	36.18	74.00	-37.82	Peak
2	2147.5000	28.24	-2.24	26.00	54.00	-28.00	AVG
3	3082.5000	36.87	1.69	38.56	74.00	-35.44	Peak
4	3082.5000	28.17	1.69	29.86	54.00	-24.14	AVG
5	3967.5000	35.02	2.95	37.97	74.00	-36.03	Peak
6	3967.5000	25.61	2.95	28.56	54.00	-25.44	AVG
7	4317.5000	34.44	3.35	37.79	74.00	-36.21	Peak
8	4317.5000	25.11	3.35	28.46	54.00	-25.54	AVG
9	5272.5000	33.73	6.50	40.23	74.00	-33.77	Peak
10	5272.5000	23.78	6.50	30.28	54.00	-23.72	AVG
11	5845.0000	32.72	8.50	41.22	74.00	-32.78	Peak
12 *	5845.0000	22.39	8.50	30.89	54.00	-23.11	AVG

EUT	HUAWEI MediaPad T3 7.0 (MediaPad T3 7.0 for short)	Model Name	BG2-W09
Temperature	25°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz	Polarization	Horizontal
Test Mode	Adapter+Earphone+Camera on+5G WiFi+GPS+Bluetooth		
Note	Adapter:PHITEK+USB Cable:Luxshare+Earphone:LIANCHUANG		
Test Engineer	Kevin Li		


80 dBuV/m

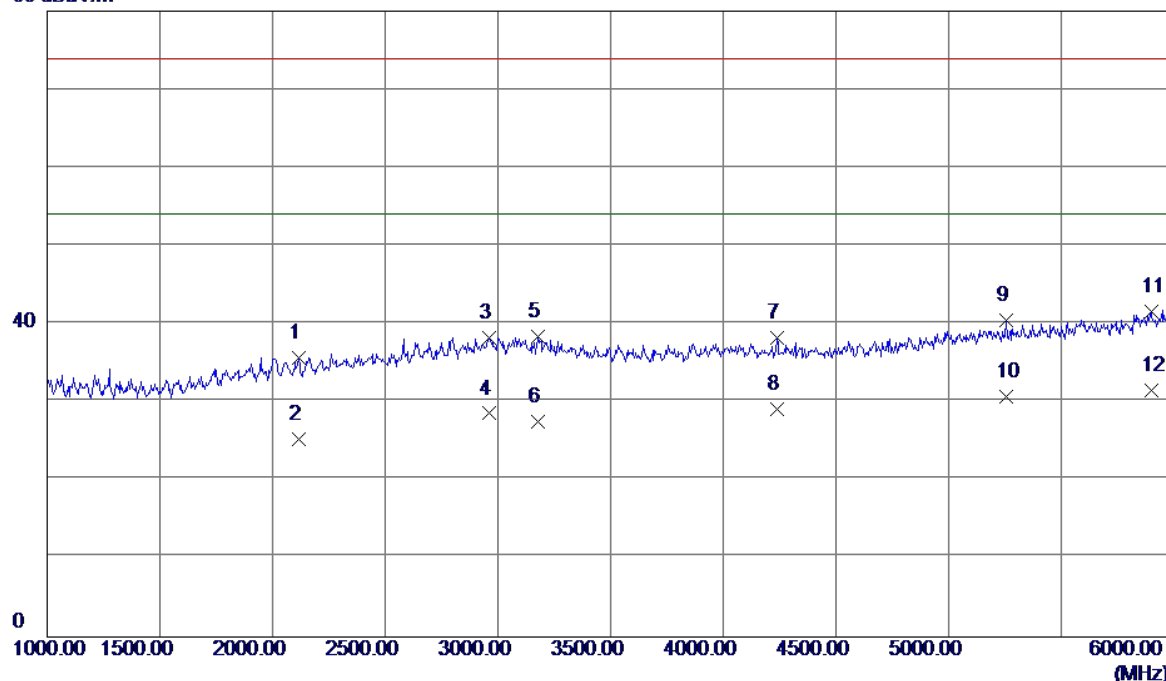

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector
1	2115.0000	38.09	-2.37	35.72	74.00	-38.28	Peak
2	2115.0000	27.72	-2.37	25.35	54.00	-28.65	AVG
3	2962.5000	36.77	1.53	38.30	74.00	-35.70	Peak
4	2962.5000	27.03	1.53	28.56	54.00	-25.44	AVG
5	3180.0000	36.72	1.63	38.35	74.00	-35.65	Peak
6	3180.0000	25.93	1.63	27.56	54.00	-26.44	AVG
7	4237.5000	34.94	3.28	38.22	74.00	-35.78	Peak
8	4237.5000	25.85	3.28	29.13	54.00	-24.87	AVG
9	5257.5000	34.01	6.45	40.46	74.00	-33.54	Peak
10	5257.5000	24.33	6.45	30.78	54.00	-23.22	AVG
11	5897.5000	32.91	8.68	41.59	74.00	-32.41	Peak
12 *	5897.5000	22.77	8.68	31.45	54.00	-22.55	AVG

EUT	HUAWEI MediaPad T3 7.0 (MediaPad T3 7.0 for short)	Model Name	BG2-W09
Temperature	25°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz	Polarization	Vertical
Test Mode	Adapter+Earphone+Camera on+5G WiFi+GPS+Bluetooth		
Note	Adapter:PHITEK+USB Cable:Luxshare+Earphone:LIANCHUANG		
Test Engineer	Kevin Li		


80 dBuV/m

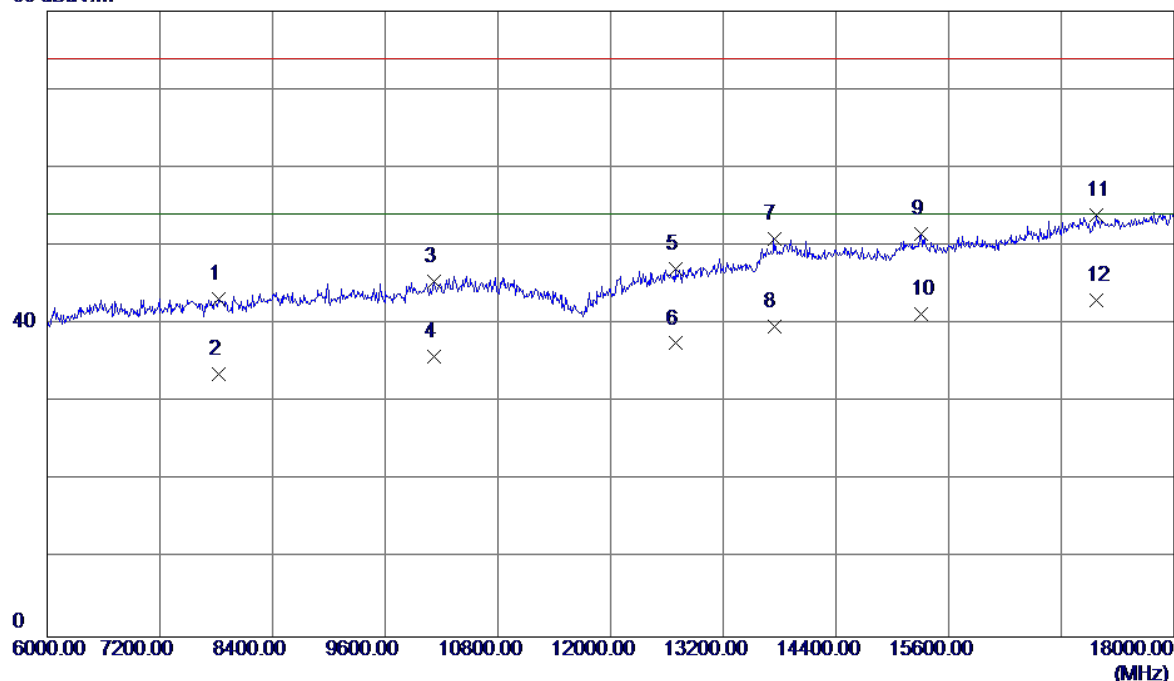

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector
1	7830.0000	31.47	11.80	43.27	74.00	-30.73	Peak
2	7830.0000	21.76	11.80	33.56	54.00	-20.44	AVG
3	10122.0000	30.83	14.63	45.46	74.00	-28.54	Peak
4	10122.0000	21.23	14.63	35.86	54.00	-18.14	AVG
5	12690.0000	29.71	17.35	47.06	74.00	-26.94	Peak
6	12690.0000	20.17	17.35	37.52	54.00	-16.48	AVG
7	13740.0000	30.09	20.86	50.95	74.00	-23.05	Peak
8	13740.0000	18.89	20.86	39.75	54.00	-14.25	AVG
9	15306.0000	32.53	18.92	51.45	74.00	-22.55	Peak
10	15306.0000	22.31	18.92	41.23	54.00	-12.77	AVG
11	17172.0000	31.56	22.28	53.84	74.00	-20.16	Peak
12 *	17172.0000	20.71	22.28	42.99	54.00	-11.01	AVG

EUT	HUAWEI MediaPad T3 7.0 (MediaPad T3 7.0 for short)	Model Name	BG2-W09
Temperature	25°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz	Polarization	Horizontal
Test Mode	Adapter+Earphone+Camera on+5G WiFi+GPS+Bluetooth		
Note	Adapter:PHITEK+USB Cable:Luxshare+Earphone:LIANCHUANG		
Test Engineer	Kevin Li		


80 dBuV/m

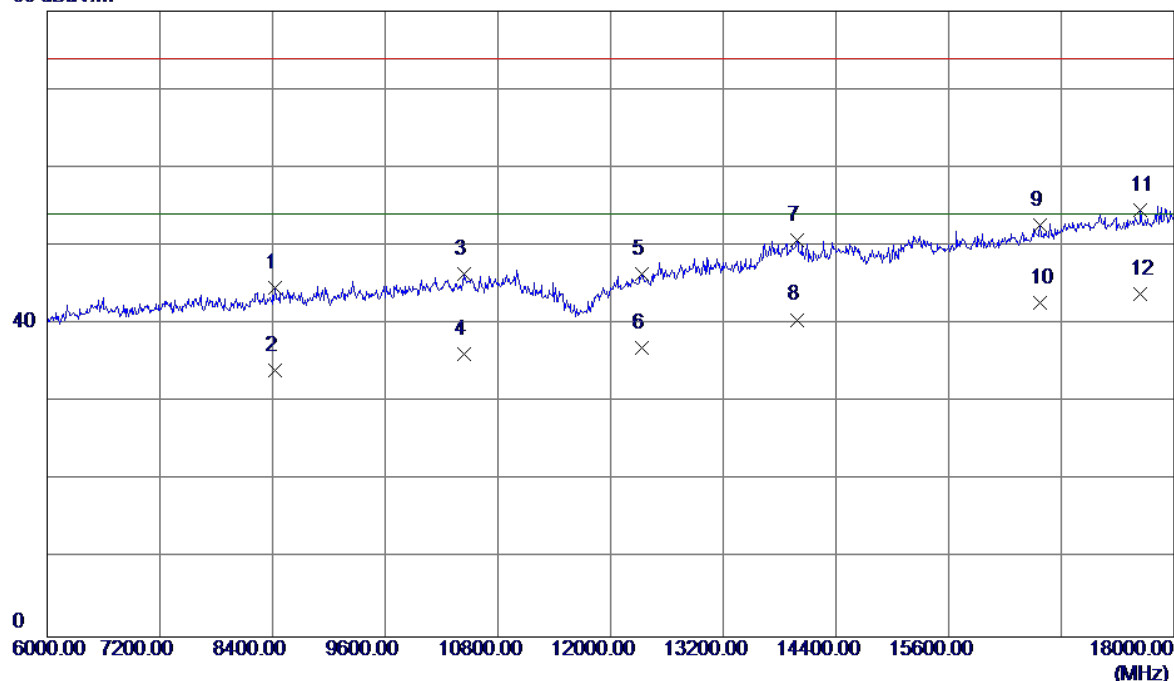

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector
1	8430.0000	31.74	12.92	44.66	74.00	-29.34	Peak
2	8430.0000	21.10	12.92	34.02	54.00	-19.98	AVG
3	10434.0000	30.93	15.42	46.35	74.00	-27.65	Peak
4	10434.0000	20.70	15.42	36.12	54.00	-17.88	AVG
5	12336.0000	29.82	16.55	46.37	74.00	-27.63	Peak
6	12336.0000	20.34	16.55	36.89	54.00	-17.11	AVG
7	13986.0000	28.58	22.07	50.65	74.00	-23.35	Peak
8	13986.0000	18.49	22.07	40.56	54.00	-13.44	AVG
9	16572.0000	33.10	19.60	52.70	74.00	-21.30	Peak
10	16572.0000	23.18	19.60	42.78	54.00	-11.22	AVG
11	17646.0000	31.39	23.21	54.60	74.00	-19.40	Peak
12 *	17646.0000	20.68	23.21	43.89	54.00	-10.11	AVG

EUT	HUAWEI MediaPad T3 7.0 (MediaPad T3 7.0 for short)	Model Name	BG2-W09
Temperature	25°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz	Polarization	Vertical
Test Mode	Adapter+Earphone+Camera on+5G WiFi+GPS+Bluetooth		
Note	Adapter:PHITEK+USB Cable:Luxshare+Earphone:LIANCHUANG		
Test Engineer	Kevin Li		


100 dBuV/m

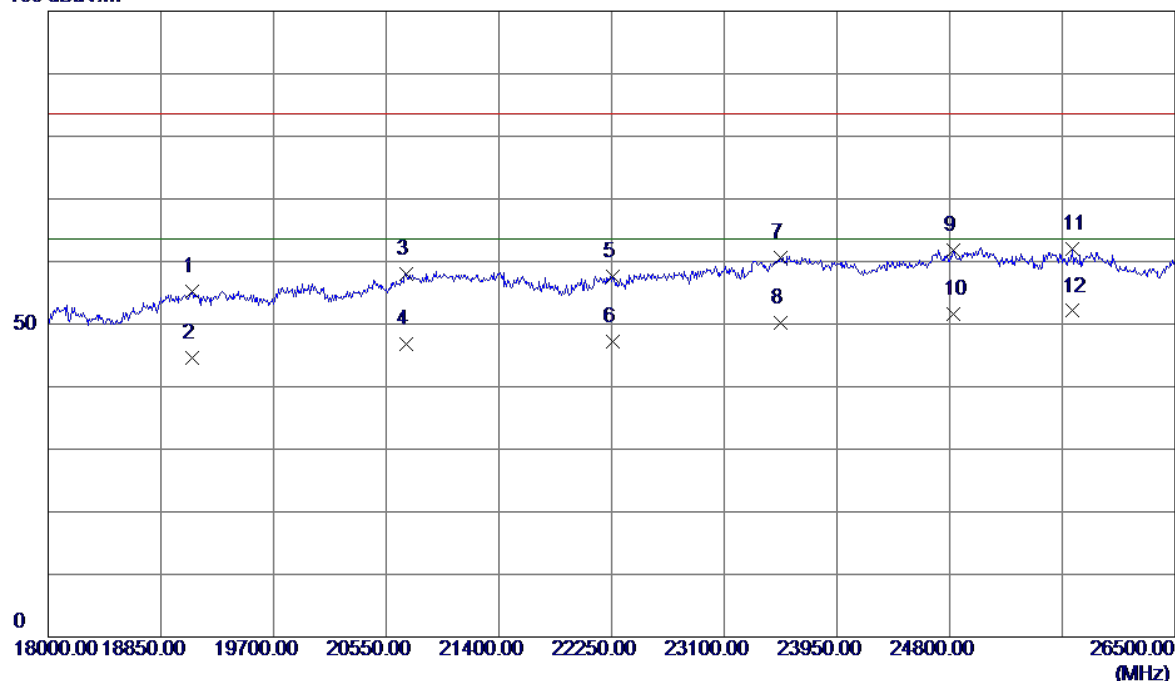

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector
1	19088.0000	51.83	3.36	55.19	83.50	-28.31	Peak
2	19088.0000	41.26	3.36	44.62	63.50	-18.88	AVG
3	20703.0000	55.64	2.37	58.01	83.50	-25.49	Peak
4	20703.0000	44.51	2.37	46.88	63.50	-16.62	AVG
5	22258.5000	54.05	3.63	57.68	83.50	-25.82	Peak
6	22258.5000	43.58	3.63	47.21	63.50	-16.29	AVG
7	23525.0000	56.62	3.92	60.54	83.50	-22.96	Peak
8	23525.0000	46.25	3.92	50.17	63.50	-13.33	AVG
9	24825.5000	57.77	4.07	61.84	83.50	-21.66	Peak
10	24825.5000	47.52	4.07	51.59	63.50	-11.91	AVG
11	25726.5000	57.27	4.81	62.08	83.50	-21.42	Peak
12 *	25726.5000	47.29	4.81	52.10	63.50	-11.40	AVG

EUT	HUAWEI MediaPad T3 7.0 (MediaPad T3 7.0 for short)	Model Name	BG2-W09
Temperature	25°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz	Polarization	Horizontal
Test Mode	Adapter+Earphone+Camera on+5G WiFi+GPS+Bluetooth		
Note	Adapter:PHITEK+USB Cable:Luxshare+Earphone:LIANCHUANG		
Test Engineer	Kevin Li		


100 dBuV/m

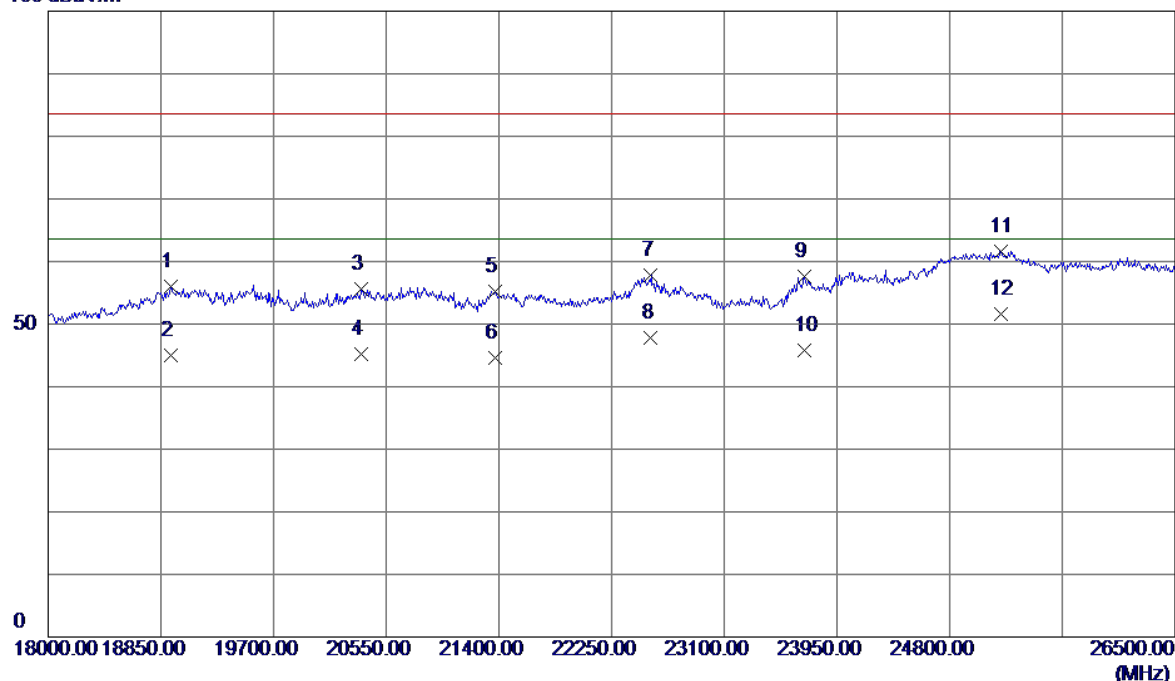

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector
1	18926.5000	52.62	3.40	56.02	83.50	-27.48	Peak
2	18926.5000	41.54	3.40	44.94	63.50	-18.56	AVG
3	20363.0000	53.56	1.95	55.51	83.50	-27.99	Peak
4	20363.0000	43.26	1.95	45.21	63.50	-18.29	AVG
5	21374.5000	51.79	3.46	55.25	83.50	-28.25	Peak
6	21374.5000	41.05	3.46	44.51	63.50	-18.99	AVG
7	22547.5000	54.08	3.68	57.76	83.50	-25.74	Peak
8	22547.5000	44.10	3.68	47.78	63.50	-15.72	AVG
9	23703.5000	53.96	3.69	57.65	83.50	-25.85	Peak
10	23703.5000	42.12	3.69	45.81	63.50	-17.69	AVG
11	25182.5000	57.24	4.45	61.69	83.50	-21.81	Peak
12 *	25182.5000	47.06	4.45	51.51	63.50	-11.99	AVG

EUT	HUAWEI MediaPad T3 7.0 (MediaPad T3 7.0 for short)	Model Name	BG2-W09
Temperature	25°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz	Polarization	Vertical
Test Mode	Adapter+Earphone+Camera on+5G WiFi+GPS+Bluetooth		
Note	Adapter:PHITEK+USB Cable:Luxshare+Earphone:LIANCHUANG		
Test Engineer	Kevin Li		


100 dBuV/m

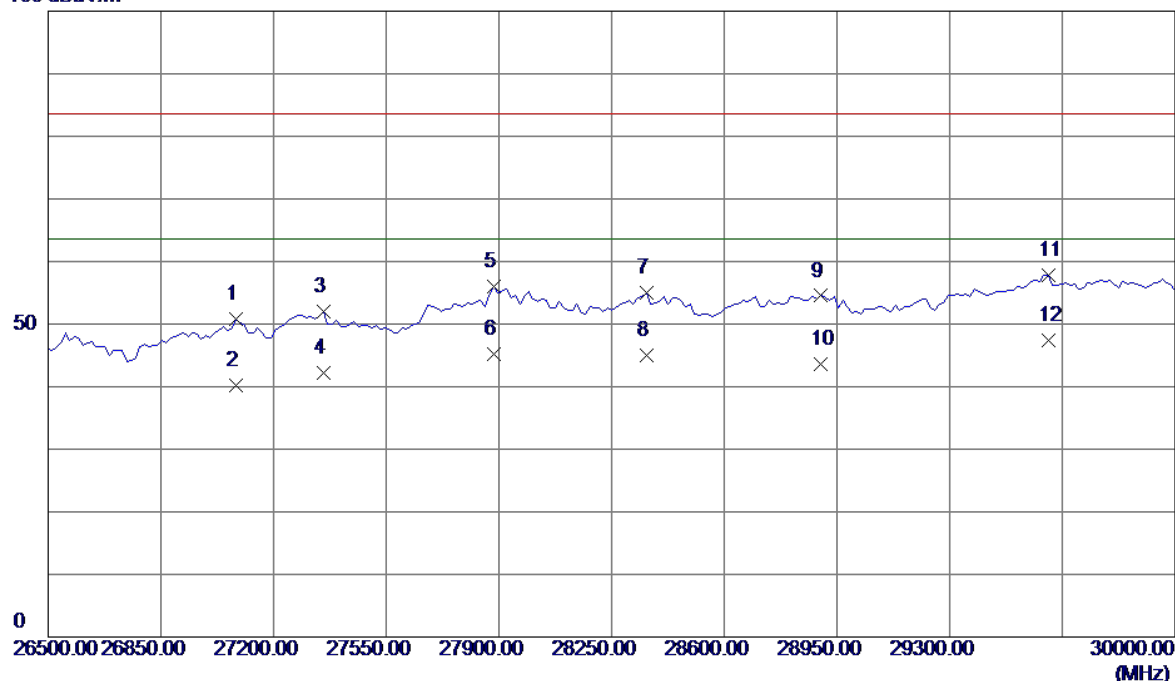

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector
1	27083.3330	46.98	3.88	50.86	83.50	-32.64	Peak
2	27083.3330	36.31	3.88	40.19	63.50	-23.31	AVG
3	27354.6510	49.02	3.06	52.08	83.50	-31.42	Peak
4	27354.6510	39.14	3.06	42.20	63.50	-21.30	AVG
5	27883.7210	51.92	3.99	55.91	83.50	-27.59	Peak
6	27883.7210	41.26	3.99	45.25	63.50	-18.25	AVG
7	28358.5270	50.17	4.78	54.95	83.50	-28.55	Peak
8	28358.5270	40.23	4.78	45.01	63.50	-18.49	AVG
9	28901.1630	49.08	5.42	54.50	83.50	-29.00	Peak
10	28901.1630	38.25	5.42	43.67	63.50	-19.83	AVG
11	29606.5890	51.49	6.31	57.80	83.50	-25.70	Peak
12 *	29606.5890	41.08	6.31	47.39	63.50	-16.11	AVG

EUT	HUAWEI MediaPad T3 7.0 (MediaPad T3 7.0 for short)	Model Name	BG2-W09
Temperature	25°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz	Polarization	Horizontal
Test Mode	Adapter+Earphone+Camera on+5G WiFi+GPS+Bluetooth		
Note	Adapter:PHITEK+USB Cable:Luxshare+Earphone:LIANCHUANG		
Test Engineer	Kevin Li		


100 dBuV/m

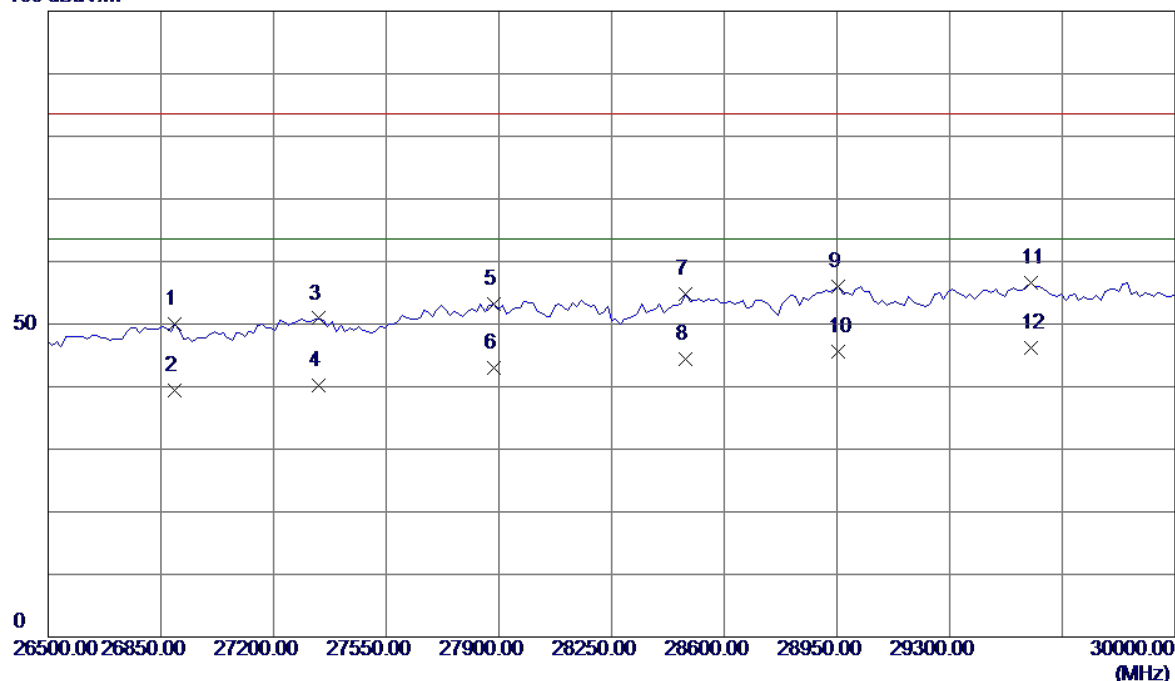

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector
1	26893.4110	45.94	4.05	49.99	83.50	-33.51	Peak
2	26893.4110	35.26	4.05	39.31	63.50	-24.19	AVG
3	27341.0850	47.80	3.10	50.90	83.50	-32.60	Peak
4	27341.0850	37.13	3.10	40.23	63.50	-23.27	AVG
5	27883.7210	49.25	3.99	53.24	83.50	-30.26	Peak
6	27883.7210	39.07	3.99	43.06	63.50	-20.44	AVG
7	28480.6200	49.86	4.91	54.77	83.50	-28.73	Peak
8	28480.6200	39.45	4.91	44.36	63.50	-19.14	AVG
9	28955.4260	50.53	5.49	56.02	83.50	-27.48	Peak
10	28955.4260	40.04	5.49	45.53	63.50	-17.97	AVG
11	29552.3260	50.47	6.13	56.60	83.50	-26.90	Peak
12 *	29552.3260	40.11	6.13	46.24	63.50	-17.26	AVG

EUT	HUAWEI MediaPad T3 7.0 (MediaPad T3 7.0 for short)	Model Name	BG2-W09
Temperature	25°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz	Polarization	Vertical
Test Mode	Adapter+Earphone+Playing		
Note	Adapter:PHITEK+USB Cable:Luxshare+Earphone:LIANCHUANG		
Test Engineer	Kevin Li		


80 dBuV/m

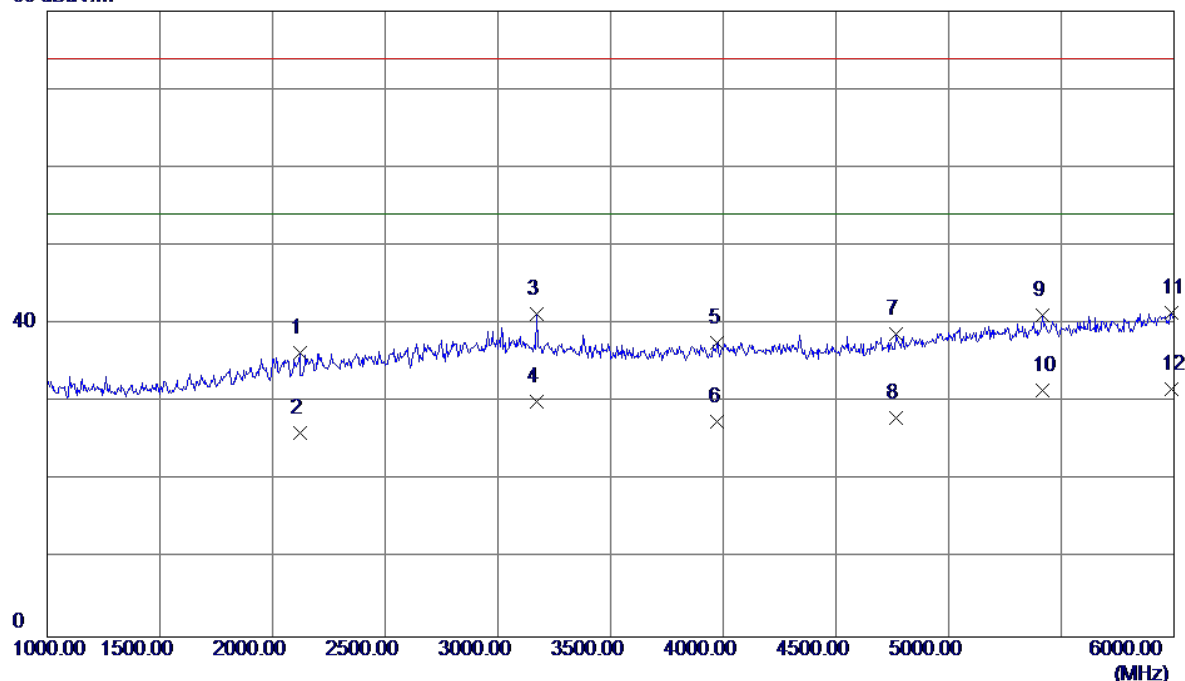

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector
1	2120.0000	38.71	-2.35	36.36	74.00	-37.64	Peak
2	2120.0000	28.38	-2.35	26.03	54.00	-27.97	AVG
3	3172.5000	39.71	1.64	41.35	74.00	-32.65	Peak
4	3172.5000	28.40	1.64	30.04	54.00	-23.96	AVG
5	3975.0000	34.65	2.97	37.62	74.00	-36.38	Peak
6	3975.0000	24.59	2.97	27.56	54.00	-26.44	AVG
7	4767.5000	34.06	4.64	38.70	74.00	-35.30	Peak
8	4767.5000	23.30	4.64	27.94	54.00	-26.06	AVG
9	5417.5000	34.16	6.99	41.15	74.00	-32.85	Peak
10	5417.5000	24.46	6.99	31.45	54.00	-22.55	AVG
11	5987.5000	32.38	9.01	41.39	74.00	-32.61	Peak
12 *	5987.5000	22.68	9.01	31.69	54.00	-22.31	AVG

EUT	HUAWEI MediaPad T3 7.0 (MediaPad T3 7.0 for short)	Model Name	BG2-W09
Temperature	25°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz	Polarization	Horizontal
Test Mode	Adapter+Earphone+Playing		
Note	Adapter:PHITEK+USB Cable:Luxshare+Earphone:LIANCHUANG		
Test Engineer	Kevin Li		


80 dBuV/m

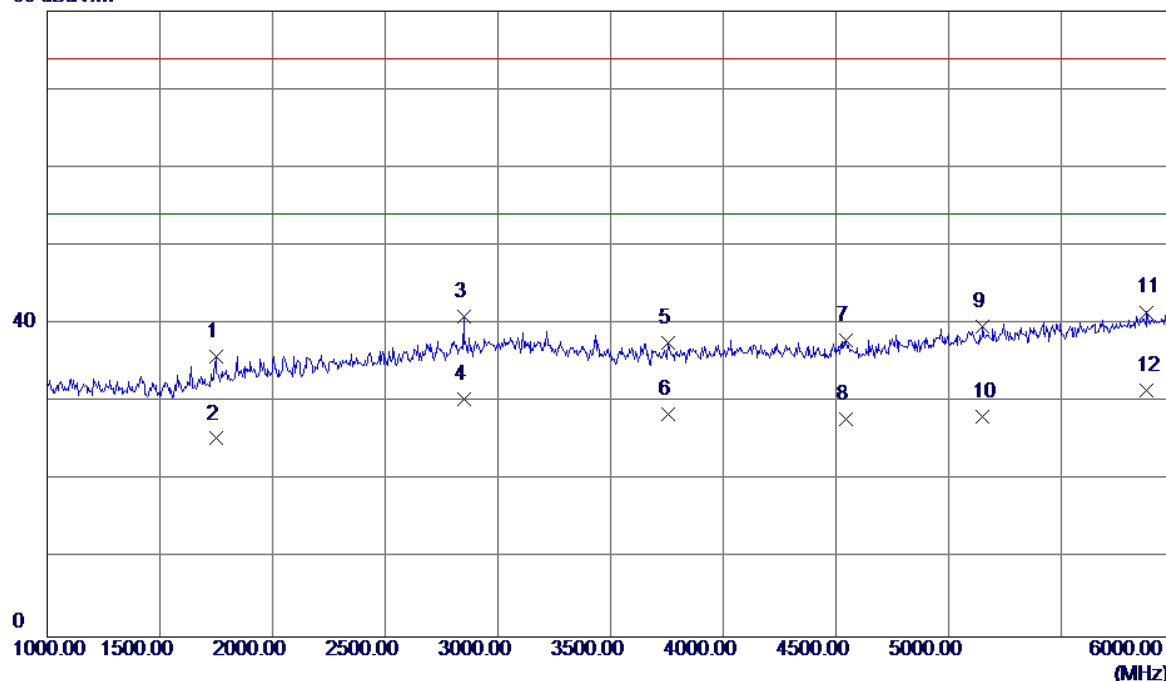

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector
1	1747.5000	40.69	-4.78	35.91	74.00	-38.09	Peak
2	1747.5000	30.14	-4.78	25.36	54.00	-28.64	AVG
3	2847.5000	40.04	0.94	40.98	74.00	-33.02	Peak
4	2847.5000	29.51	0.94	30.45	54.00	-23.55	AVG
5	3757.5000	35.31	2.28	37.59	74.00	-36.41	Peak
6	3757.5000	26.18	2.28	28.46	54.00	-25.54	AVG
7	4542.5000	34.22	3.71	37.93	74.00	-36.07	Peak
8	4542.5000	24.15	3.71	27.86	54.00	-26.14	AVG
9	5152.5000	33.57	6.11	39.68	74.00	-34.32	Peak
10	5152.5000	22.02	6.11	28.13	54.00	-25.87	AVG
11	5880.0000	32.90	8.62	41.52	74.00	-32.48	Peak
12 *	5880.0000	22.90	8.62	31.52	54.00	-22.48	AVG

EUT	HUAWEI MediaPad T3 7.0 (MediaPad T3 7.0 for short)	Model Name	BG2-W09
Temperature	25°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz	Polarization	Vertical
Test Mode	Adapter+Speaker+Playing		
Note	Adapter:PHITEK+USB Cable:Luxshare+Earphone:LIANCHUANG		
Test Engineer	Kevin Li		


80 dBuV/m

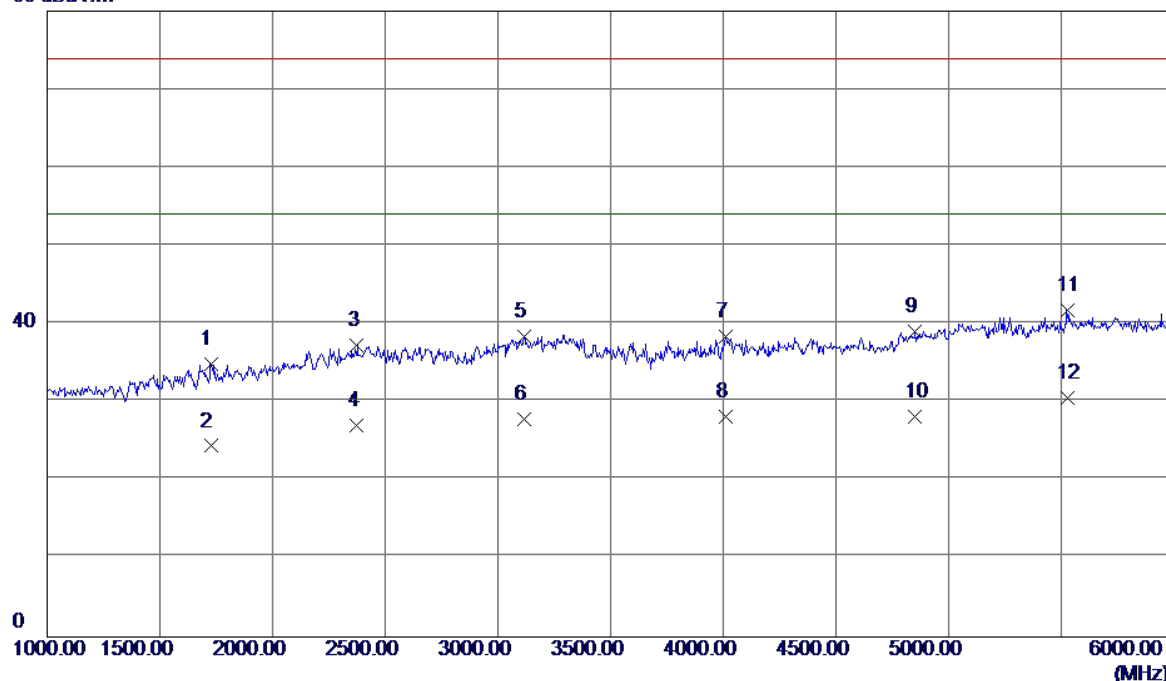

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector
1	1725.0000	39.80	-4.95	34.85	74.00	-39.15	Peak
2	1725.0000	29.35	-4.95	24.40	54.00	-29.60	AVG
3	2375.0000	38.66	-1.36	37.30	74.00	-36.70	Peak
4	2375.0000	28.46	-1.36	27.10	54.00	-26.90	AVG
5	3115.0000	36.77	1.67	38.44	74.00	-35.56	Peak
6	3115.0000	26.14	1.67	27.81	54.00	-26.19	AVG
7	4010.0000	35.34	3.06	38.40	74.00	-35.60	Peak
8	4010.0000	25.14	3.06	28.20	54.00	-25.80	AVG
9	4850.0000	34.08	4.98	39.06	74.00	-34.94	Peak
10	4850.0000	23.17	4.98	28.15	54.00	-25.85	AVG
11	5525.0000	34.44	7.35	41.79	74.00	-32.21	Peak
12 *	5525.0000	23.19	7.35	30.54	54.00	-23.46	AVG

EUT	HUAWEI MediaPad T3 7.0 (MediaPad T3 7.0 for short)	Model Name	BG2-W09
Temperature	25°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz	Polarization	Vertical
Test Mode	Adapter+Speaker+Playing		
Note	Adapter:PHITEK+USB Cable:Luxshare+Earphone:LIANCHUANG		
Test Engineer	Kevin Li		

80 dBuV/m

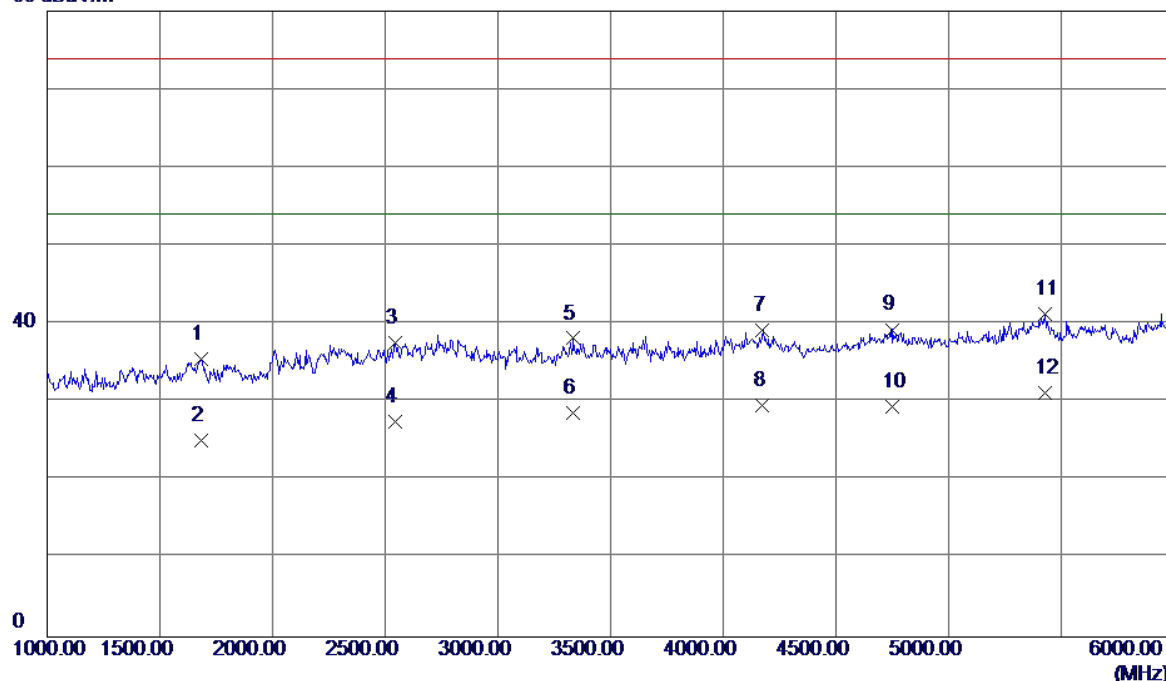

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector
1	1685.0000	40.74	-5.26	35.48	74.00	-38.52	Peak
2	1685.0000	30.42	-5.26	25.16	54.00	-28.84	AVG
3	2542.5000	38.26	-0.65	37.61	74.00	-36.39	Peak
4	2542.5000	28.19	-0.65	27.54	54.00	-26.46	AVG
5	3335.0000	36.61	1.55	38.16	74.00	-35.84	Peak
6	3335.0000	27.09	1.55	28.64	54.00	-25.36	AVG
7	4175.0000	35.94	3.22	39.16	74.00	-34.84	Peak
8	4175.0000	26.42	3.22	29.64	54.00	-24.36	AVG
9	4752.5000	34.70	4.58	39.28	74.00	-34.72	Peak
10	4752.5000	24.87	4.58	29.45	54.00	-24.55	AVG
11	5427.5000	34.22	7.02	41.24	74.00	-32.76	Peak
12 *	5427.5000	24.17	7.02	31.19	54.00	-22.81	AVG