


# FCC Test Report


## FCC ID: QISBGO-L03

**Project No.** : 1608C212  
**Equipment** : HUAWEI MediaPad T2 7.0 (MediaPad T2 7.0 for short)  
**Model Name** : BGO-L03  
**Applicant** : Huawei Technologies Co.,Ltd.  
**Address** : Administration Building, Headquarters of Huawei Technologies Co., Ltd., Bantian, Longgang District, Shenzhen, 518129, P.R.C

**Date of Receipt** : Aug. 26, 2016  
**Date of Test** : Aug. 26, 2016 ~ Sep. 05, 2016  
**Issued Date** : Sep. 06, 2016  
**Tested by** : BTL Inc.

**Testing Engineer** :   
(Bill Zhang)

**Technical Manager** :   
(James Chiu)

**Authorized Signatory** :   
(Steven Lu)

# **B T L I N C .**

No.3, Jinshagang 1st Road, Shixia, Dalang Town, Dongguan,  
Guangdong, China.

TEL: +86-769-8318-3000 FAX: +86-769-8319-6000



### **Declaration**

**BTL** represents to the client that testing is done in accordance with standard procedures as applicable and that test instruments used has been calibrated with standards traceable to international standard(s) and/or national standard(s).

**BTL's** reports apply only to the specific samples tested under conditions. It is manufacture's responsibility to ensure that additional production units of this model are manufactured with the identical electrical and mechanical components. **BTL** shall have no liability for any declarations, inferences or generalizations drawn by the client or others from **BTL** issued reports.

**BTL's** report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the Federal Government.

This report is the confidential property of the client. As a mutual protection to the clients, the public and **BTL-self**, extracts from the test report shall not be reproduced except in full with **BTL's** authorized written approval.

**BTL's** laboratory quality assurance procedures are in compliance with the **ISO Guide 17025** requirements, and accredited by the conformity assessment authorities listed in this test report.

### **Limitation**

For the use of the authority's logo is limited unless the Test Standard(s)/Scope(s)/Item(s) mentioned in this test report is (are) included in the conformity assessment authorities acceptance respective.

| <b>Table of Contents</b>                                     | <b>Page</b> |
|--------------------------------------------------------------|-------------|
| <b>REPORT ISSUED HISTORY</b>                                 | <b>4</b>    |
| <b>1 . CERIFICATION</b>                                      | <b>5</b>    |
| <b>2 . SUMMARY OF TEST RESULTS</b>                           | <b>6</b>    |
| 2.1 TEST FACILITY                                            | 7           |
| 2.2 MEASUREMENT UNCERTAINTY                                  | 7           |
| <b>3 . GENERAL INFORMATION</b>                               | <b>8</b>    |
| 3.1 GENERAL DESCRIPTION OF EUT                               | 8           |
| 3.2 DESCRIPTION OF TEST MODES                                | 9           |
| 3.3 BLOCK DIAGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED | 10          |
| 3.4 DESCRIPTION OF SUPPORT UNITS                             | 11          |
| <b>4 . EMC EMISSION TEST</b>                                 | <b>12</b>   |
| 4.1 CONDUCTED EMISSION MEASUREMENT                           | 12          |
| 4.1.1 POWER LINE CONDUCTED EMISSION                          | 12          |
| 4.1.2 MEASUREMENT INSTRUMENTS LIST                           | 12          |
| 4.1.3 TEST PROCEDURE                                         | 13          |
| 4.1.4 DEVIATION FROM TEST STANDARD                           | 13          |
| 4.1.5 TEST SETUP                                             | 13          |
| 4.1.6 EUT OPERATING CONDITIONS                               | 13          |
| 4.1.7 TEST RESULTS                                           | 14          |
| 4.2 RADIATED EMISSION MEASUREMENT                            | 41          |
| 4.2.1 LIMITS OF RADIATED EMISSION MEASUREMENT                | 41          |
| 4.2.2 MEASUREMENT INSTRUMENTS LIST                           | 42          |
| 4.2.3 TEST PROCEDURE                                         | 43          |
| 4.2.4 DEVIATION FROM TEST STANDARD                           | 43          |
| 4.2.5 TEST SETUP                                             | 44          |
| 4.2.6 EUT OPERATING CONDITIONS                               | 44          |
| 4.2.7 TEST RESULTS-BELOW 1GHZ                                | 45          |
| 4.2.8 TEST RESULTS-ABOVE 1GHZ                                | 72          |

### REPORT ISSUED HISTORY

| Issued No.          | Description     | Issued Date   |
|---------------------|-----------------|---------------|
| BTL-FCCE-1-1608C212 | Original Issue. | Sep. 06, 2016 |

## 1. CERIFICATION

Equipment : HUAWEI MediaPad T2 7.0 (MediaPad T2 7.0 for short)  
Brand Name : HUAWEI  
Model Name : BGO-L03  
Applicant : Huawei Technologies Co.,Ltd.  
Manufacturer : Huawei Technologies Co.,Ltd.  
Address : Administration Building, Huawei Base, Bantian, Longgang District ,Shenzhen  
518129, P.R.China  
Factory : Huawei Technologies Co.,Ltd.  
Address : Administration Building, Huawei Base, Bantian, Longgang District ,Shenzhen  
518129, P.R.China  
Date of Test : Aug. 26, 2016 ~ Sep. 05, 2016  
Test Sample : Engineering Sample  
Standard(s) : FCC Part 15, Subpart B  
ANSI C63.4-2014

The above equipment has been tested and found compliance with the requirement of the relative standards by BTL Inc.

The test data, data evaluation, and equipment configuration contained in our test report (Ref No. BTL-FCCE-1-1608C212) were obtained utilizing the test procedures, test instruments, test sites that has been accredited by the Authority of TAF according to the ISO-17025 quality assessment standard and technical standard(s).

## 2. SUMMARY OF TEST RESULTS

Test procedures according to the technical standard(s):

| EMC Emission          |                                  |         |          |          |
|-----------------------|----------------------------------|---------|----------|----------|
| Standard(s)           | Test Item                        | Limit   | Judgment | Remark   |
| FCC Part15, Subpart B | Conducted Emission               | Class B | PASS     |          |
|                       | Radiated emission<br>Below 1 GHz | Class B | PASS     |          |
|                       | Radiated emission<br>Above 1 GHz | Class B | PASS     | NOTE (2) |

NOTE:

- (1) " N/A" denotes test is not applicable to this device.
- (2) The EUT's max operating frequency is below 108 MHz, so the test will not be performed.

## 2.1 TEST FACILITY

The test facilities used to collect the test data in this report at the location of No.3, Jinshagang 1st Road, Shixia, Dalang Town, Dongguan, Guangdong, China.

## 2.2 MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2. The BTL measurement uncertainty is less than the CISPR 16-4-2  $U_{\text{CISPR}}$  requirement.

The reported uncertainty of measurement  $y \pm U$ , where expanded uncertainty  $U$  is based on a standard uncertainty multiplied by a coverage factor of  $k=2$ , providing a level of confidence of approximately 95%.

### A. A. Conducted Measurement:

| Test Site | Method | Measurement Frequency Range | $U$ , (dB) |
|-----------|--------|-----------------------------|------------|
| DG-C02    | CISPR  | 150 kHz ~ 30MHz             | 2.32       |

### B. Radiated Measurement:

| Test Site       | Method | Measurement Frequency Range | Ant.<br>H / V | $U$ , (dB) |
|-----------------|--------|-----------------------------|---------------|------------|
| DG-CB03<br>(3m) | CISPR  | 30MHz ~ 200MHz              | V             | 3.82       |
|                 |        | 30MHz ~ 200MHz              | H             | 3.78       |
|                 |        | 200MHz ~ 1,000MHz           | V             | 4.10       |
|                 |        | 200MHz ~ 1,000MHz           | H             | 4.06       |

| Test Site       | Method | Measurement Frequency Range | Ant.<br>H / V | $U$ , (dB) |
|-----------------|--------|-----------------------------|---------------|------------|
| DG-CB03<br>(3m) | CISPR  | 1GHz ~ 18GHz                | V             | 3.12       |
|                 |        | 1GHz ~ 18GHz                | H             | 3.68       |
|                 |        | 18GHz ~ 40GHz               | V             | 4.15       |
|                 |        | 18GHz ~ 40GHz               | H             | 4.14       |

Note: Unless specifically mentioned, the uncertainty of measurement has not been taken into account to declare the compliance or non-compliance to the specification.

### 3. GENERAL INFORMATION

#### 3.1 GENERAL DESCRIPTION OF EUT

|                  |                                                                                                                                                                                                                                                                                                                   |
|------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Equipment        | HUAWEI MediaPad T2 7.0 (MediaPad T2 7.0 for short)                                                                                                                                                                                                                                                                |
| Brand Name       | HUAWEI                                                                                                                                                                                                                                                                                                            |
| Test Model Name  | BGO-L03                                                                                                                                                                                                                                                                                                           |
| Model Difference | N/A                                                                                                                                                                                                                                                                                                               |
| Frequency        | GSM 850/1900<br>WCDMA B2/4/5<br>LTE B2/4/5/7/17<br>BT 4.0<br>Wi-Fi: 802.11b/g/n                                                                                                                                                                                                                                   |
| Power Source     | #1 DC voltage supplied from AC/DC adapter.<br>Manufacturer:<br>(1) HUIZHOU BYD ELECTRONIC CO., LTD.<br>(2) Shenzhen Huntkey Electric Co., Ltd.<br>(3) Dongguan Phitek Electronics Co., Ltd<br>Model:<br>HW-050100U01 (US), HW-050100A01 (AU)<br>HW-050100E01 (EU), HW-050100B01 (UK)<br>#2 Supplied from battery. |
| Power Rating     | #1 I/P: 100-240V~50/60Hz, 0.2A<br>#2 DC 3.7V 4000mAh                                                                                                                                                                                                                                                              |
| HW Version       | SH1BAGO721LM                                                                                                                                                                                                                                                                                                      |
| SW Version       | BGO-L03C331B002                                                                                                                                                                                                                                                                                                   |

Note:

- For a more detailed features description, please refer to the manufacturer's specifications or the user's manual.
- 

| Item      | Mfr/Brand                                        | Model.              |
|-----------|--------------------------------------------------|---------------------|
| Battery   | Harbin Coslight Power Co., Ltd.                  | HB3G1               |
|           | Sunwoda Electronic Co., LTD                      |                     |
| USB Cable | HONGLIN TECHNOLOGY CO., LTD                      | 130-26988           |
|           | FOXCONN INTERCONNECT CO., LTD                    | CUBB01M-HC304-DH    |
|           | Shenzhen Luxshare Precision Industry Co., Ltd    | L99U2017-CS-H       |
| Earphone  | GoerTek Inc                                      | HA1-3, HG-04A       |
|           | Jiangxi Lianchuang Hongsheng Electronic Co., LTD | MEMD1632B580C00     |
|           | BOLUO COUNTY QUANCHENG ELECTRONIC                | 1311-3291-3.5mm-229 |

### 3.2 DESCRIPTION OF TEST MODES

To investigate the maximum EMI emission characteristics generated from EUT, the test system was pre-scanning tested base on the consideration of following EUT operation mode or test configuration mode which possible have effect on EMI emission level. Each of these EUT operation mode(s) or test configuration mode(s) mentioned above was evaluated respectively.


| Pretest Mode | Description                   |
|--------------|-------------------------------|
| Mode 1       | USB copy(EUT with PC)+idle    |
| Mode 2       | Adapter+WIFI+BT+GPS+Camera On |
| Mode 3       | Adapter+playing+speaker       |
| Mode 4       | Adapter+playing+Earphone      |
| Mode 5       | Adapter+Traffic(GSM)          |
| Mode 6       | Adapter+Traffic(WCDMA)        |
| Mode 7       | Adapter+Traffic(LTE)          |

| For Conducted Test |                               |
|--------------------|-------------------------------|
| Final Test Mode    | Description                   |
| Mode 1             | USB copy(EUT with PC)+idle    |
| Mode 2             | Adapter+WIFI+BT+GPS+Camera On |
| Mode 3             | Adapter+playing+speaker       |
| Mode 4             | Adapter+playing+Earphone      |
| Mode 5             | Adapter+Traffic(GSM)          |
| Mode 6             | Adapter+Traffic(WCDMA)        |
| Mode 7             | Adapter+Traffic(LTE)          |


| For Radiated Test |                               |
|-------------------|-------------------------------|
| Final Test Mode   | Description                   |
| Mode 1            | USB copy(EUT with PC)+idle    |
| Mode 2            | Adapter+WIFI+BT+GPS+Camera On |
| Mode 3            | Adapter+playing+speaker       |
| Mode 4            | Adapter+playing+Earphone      |
| Mode 5            | Adapter+Traffic(GSM)          |
| Mode 6            | Adapter+Traffic(WCDMA)        |
| Mode 7            | Adapter+Traffic(LTE)          |

### 3.3 BLOCK DIAGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED

#### Mode 1

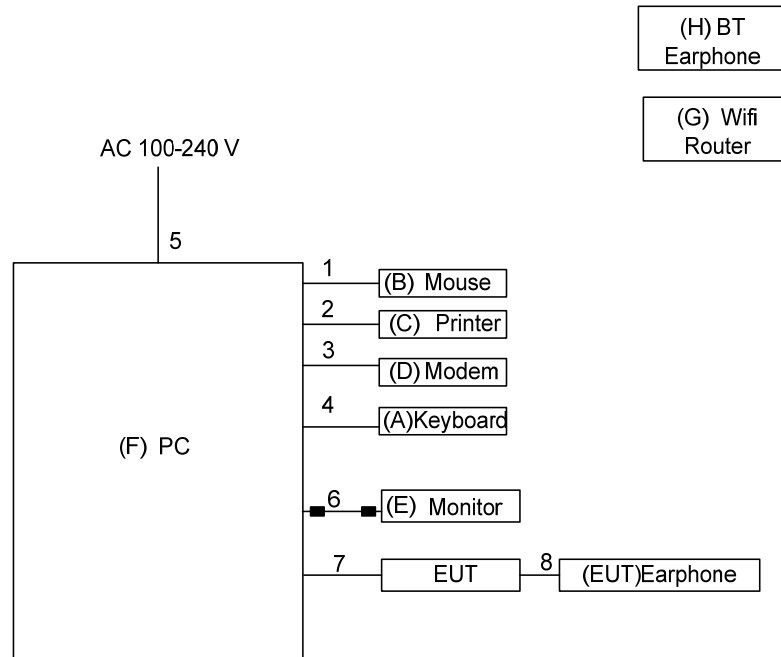

#### Mode 2~7

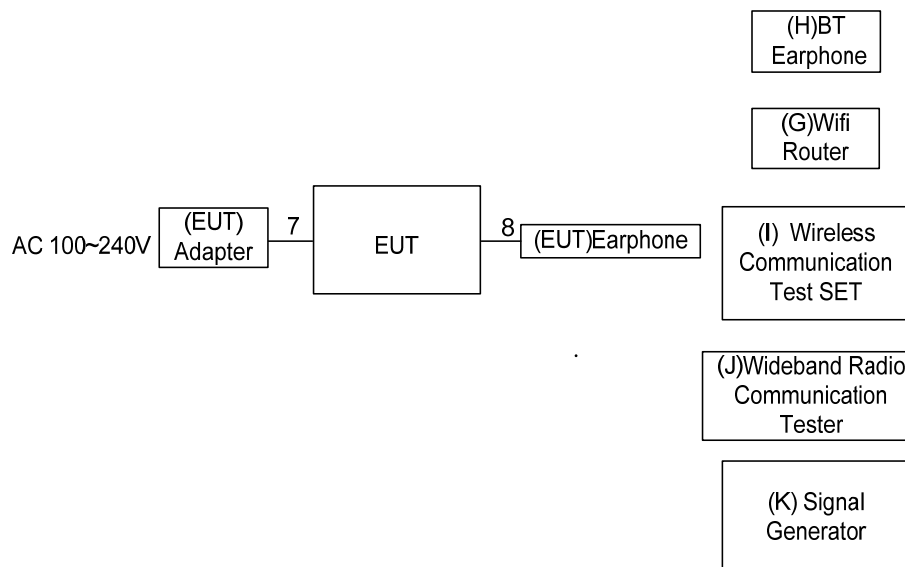

### 3.4 DESCRIPTION OF SUPPORT UNITS

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

| Item | Equipment                           | Mfr/Brand | Model/Type No.       | FCC ID      | Series No.              |
|------|-------------------------------------|-----------|----------------------|-------------|-------------------------|
| A    | USB Keyboard                        | Dell      | L100                 | DOC         | CNORH6596589071T08NE    |
| B    | USB Mouse                           | Dell      | MO56UOA              | DOC         | FQJ000BS                |
| C    | Printer                             | SII       | DPU-414              | DOC         | 3018507 B               |
| D    | Modem                               | ACEEX     | DM-1414V             | IFAXDM1414  | 0603002131              |
| E    | LCD monitor                         | Dell      | E177FPc              | DOC         | CNOFJ179-64180-6AG-1WNS |
| F    | PC                                  | Dell      | 745                  | DOC         | G7K832X                 |
| G    | wireless router                     | ASUS      | RT-AC66U             | MSQ-RTAC66U | E8ICGG000138            |
| H    | BT earphone                         | N/A       | N/A                  | N/A         | N/A                     |
| I    | Wireless Communication Test SET     | Agilent   | (8960 Series) E5515C | N/A         | MY48364183              |
| J    | Wideband Radio Communication Tester | RS        | CMW500               | N/A         | 122125                  |
| K    | Signal Generator                    | Agilent   | E4438C               | N/A         | MY49071316              |

| Item | Shielded Type | Ferrite Core | Length | Note           |
|------|---------------|--------------|--------|----------------|
| 1    | YES           | NO           | 1.8m   | USB Cable      |
| 2    | YES           | NO           | 1.8m   | Parallel Cable |
| 3    | YES           | NO           | 1.8m   | RS232 Cable    |
| 4    | YES           | NO           | 1.8m   | USB Cable      |
| 5    | NO            | NO           | 1.8m   | AC Cable       |
| 6    | YES           | YES          | 1.8m   | D-SUB Cable    |
| 7    | YES           | NO           | 1m     | USB Cable      |
| 8    | NO            | NO           | 1.1m   | Audio Cable    |

## 4. EMC EMISSION TEST

### 4.1 CONDUCTED EMISSION MEASUREMENT

#### 4.1.1 POWER LINE CONDUCTED EMISSION (FREQUENCY RANGE 150KHZ-30MHZ)

| FREQUENCY (MHz) | Class A (dBuV) |         | Class B dBuV) |           |
|-----------------|----------------|---------|---------------|-----------|
|                 | Quasi-peak     | Average | Quasi-peak    | Average   |
| 0.15 -0.5       | 79.00          | 66.00   | 66 - 56 *     | 56 - 46 * |
| 0.50 -5.0       | 73.00          | 60.00   | 56.00         | 46.00     |
| 5.0 -30.0       | 73.00          | 60.00   | 60.00         | 50.00     |

Note:

- (1) The tighter limit applies at the band edges.
- (2) The limit of " \* " marked band means the limitation decreases linearly with the logarithm of the frequency in the range.
- (3) The test result calculated as following:  
 Measurement Value = Reading Level + Correct Factor  
 Correct Factor = Insertion Loss + Cable Loss + Attenuator Factor(if use)  
 Margin Level = Measurement Value - Limit Value

#### 4.1.2 MEASUREMENT INSTRUMENTS LIST

| Item | Kind of Equipment    | Manufacturer | Type No.                 | Serial No. | Calibrated until |
|------|----------------------|--------------|--------------------------|------------|------------------|
| 1    | LISN                 | EMCO         | 3816/2                   | 0052765    | Mar. 27, 2017    |
| 2    | LISN                 | R&S          | ENV216                   | 101447     | Mar. 27, 2017    |
| 3    | Test Cable           | emci         | RG223(9KHz-30MHz)        | C_17       | Mar. 10, 2017    |
| 4    | EMI Test Receiver    | R&S          | ESCI                     | 100382     | Mar. 27, 2017    |
| 5    | 50Ω Terminator       | SHX          | TF2-3G-A                 | 08122901   | Mar. 27, 2017    |
| 6    | Measurement Software | Farad        | EZ-EMC<br>Ver.NB-03A1-01 | N/A        | N/A              |

Remark: "N/A" denotes no model name, serial no. or calibration specified.  
 All calibration period of equipment list is one year.


#### 4.1.3 TEST PROCEDURE

- a. The EUT was placed 0.8 meters from the horizontal ground plane with EUT being connected to the power mains through a line impedance stabilization network (LISN). All other support equipment powered from additional LISN(s). The LISN provide 50 Ohm/ 50uH of coupling impedance for the measuring instrument.
- b. Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.
- c. I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
- d. LISN at least 80 cm from nearest part of EUT chassis.
- e. For the actual test configuration, please refer to the related Item –EUT Test Photos.
- f. First the whole spectrum of emission caused by equipment under test(EUT) is recorded with Detector set to peak. Peak value recorded in table if the margin from QP Limit is larger than 2dB, otherwise, QP value is recorded, Measuring frequency range from 150KHz to 30MHz.

#### 4.1.4 DEVIATION FROM TEST STANDARD

No deviation

#### 4.1.5 TEST SETUP

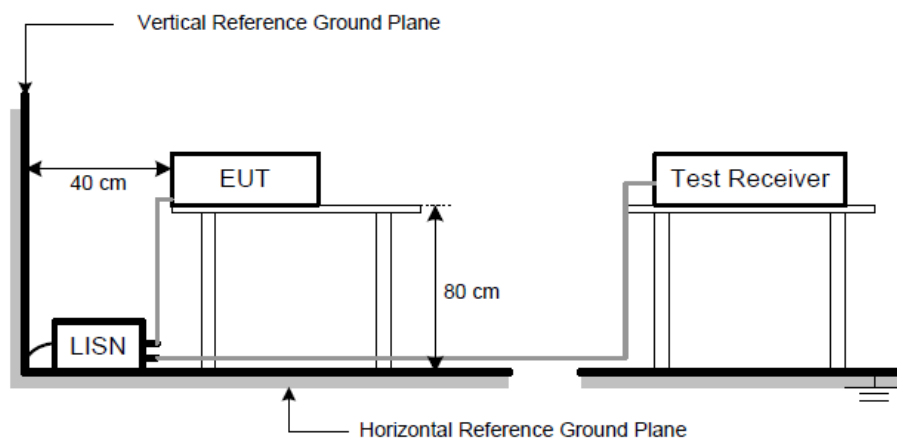

#### 4.1.6 EUT OPERATING CONDITIONS


The EUT exercise program used during radiated and/or conducted emission measurement was designed to exercise the various system components in a manner similar to a typical use.

#### 4.1.7 TEST RESULTS

##### Remark


- (1) Reading in which marked as QP means measurements by using are Quasi-Peak Mode with Detector BW=9KHz, SPA setting in RBW=10KHz,VBW =10KHz, Swp. Time = 0.3 sec./MHz. Reading in which marked as AV means measurements by using are Average Mode with instrument setting in RBW=10KHz,VBW=10KHz, Swp. Time =0.3 sec./MHz.
- (2) All readings are QP Mode value unless otherwise stated AVG in column of 『Note』. If the QP Mode Measured value compliance with the QP Limits and lower than AVG Limits, the EUT shall be deemed to meet both QP & AVG Limits and then only QP Mode was measured, but AVG Mode didn't perform.In this case, a “ \* ” marked in AVG Mode column of Interference Voltage Measured.

|               |                                                    |                   |         |
|---------------|----------------------------------------------------|-------------------|---------|
| EUT           | HUAWEI MediaPad T2 7.0 (MediaPad T2 7.0 for short) | Model Name        | BGO-L03 |
| Temperature   | 25°C                                               | Relative Humidity | 53%     |
| Test Voltage  | AC 120V/60Hz                                       | Phase             | Line    |
| Test Mode     | USB copy(EUT with PC)+idle                         |                   |         |
| Note          | USB cable:FOXCONN                                  |                   |         |
| Test Engineer | Lucky Mao                                          |                   |         |

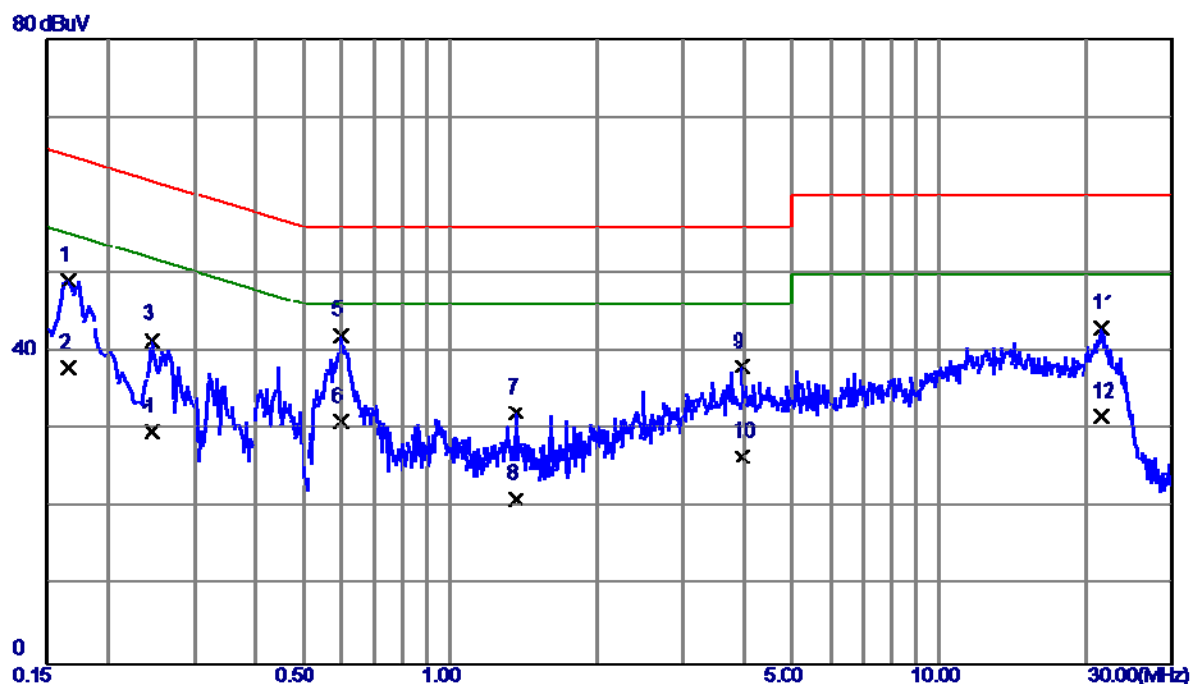


| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV | Limit<br>dBuV | Margin<br>dB | Detector |
|-----|--------------|--------------------------|-------------------------|-------------------------|---------------|--------------|----------|
| 1   | 0.1660       | 39.65                    | 9.52                    | 49.17                   | 65.16         | -15.99       | QP       |
| 2   | 0.1660       | 28.34                    | 9.52                    | 37.86                   | 55.16         | -17.30       | AVG      |
| 3   | 0.2460       | 31.99                    | 9.53                    | 41.52                   | 61.89         | -20.37       | QP       |
| 4   | 0.2460       | 20.25                    | 9.53                    | 29.78                   | 51.89         | -22.11       | AVG      |
| 5 * | 0.5980       | 32.38                    | 9.64                    | 42.02                   | 56.00         | -13.98       | QP       |
| 6   | 0.5980       | 21.34                    | 9.64                    | 30.98                   | 46.00         | -15.02       | AVG      |
| 7   | 1.3660       | 22.29                    | 9.83                    | 32.12                   | 56.00         | -23.88       | QP       |
| 8   | 1.3660       | 11.28                    | 9.83                    | 21.11                   | 46.00         | -24.89       | AVG      |
| 9   | 3.9700       | 27.96                    | 10.19                   | 38.15                   | 56.00         | -17.85       | QP       |
| 10  | 3.9700       | 16.34                    | 10.19                   | 26.53                   | 46.00         | -19.47       | AVG      |
| 11  | 21.3980      | 32.71                    | 10.40                   | 43.11                   | 60.00         | -16.89       | QP       |
| 12  | 21.3980      | 21.25                    | 10.40                   | 31.65                   | 50.00         | -18.35       | AVG      |

|               |                                                    |                   |         |
|---------------|----------------------------------------------------|-------------------|---------|
| EUT           | HUAWEI MediaPad T2 7.0 (MediaPad T2 7.0 for short) | Model Name        | BGO-L03 |
| Temperature   | 25°C                                               | Relative Humidity | 53%     |
| Test Voltage  | AC 120V/60Hz                                       | Phase             | Neutral |
| Test Mode     | USB copy(EUT with PC)+idle                         |                   |         |
| Note          | USB cable:FOXCONN                                  |                   |         |
| Test Engineer | Lucky Mao                                          |                   |         |

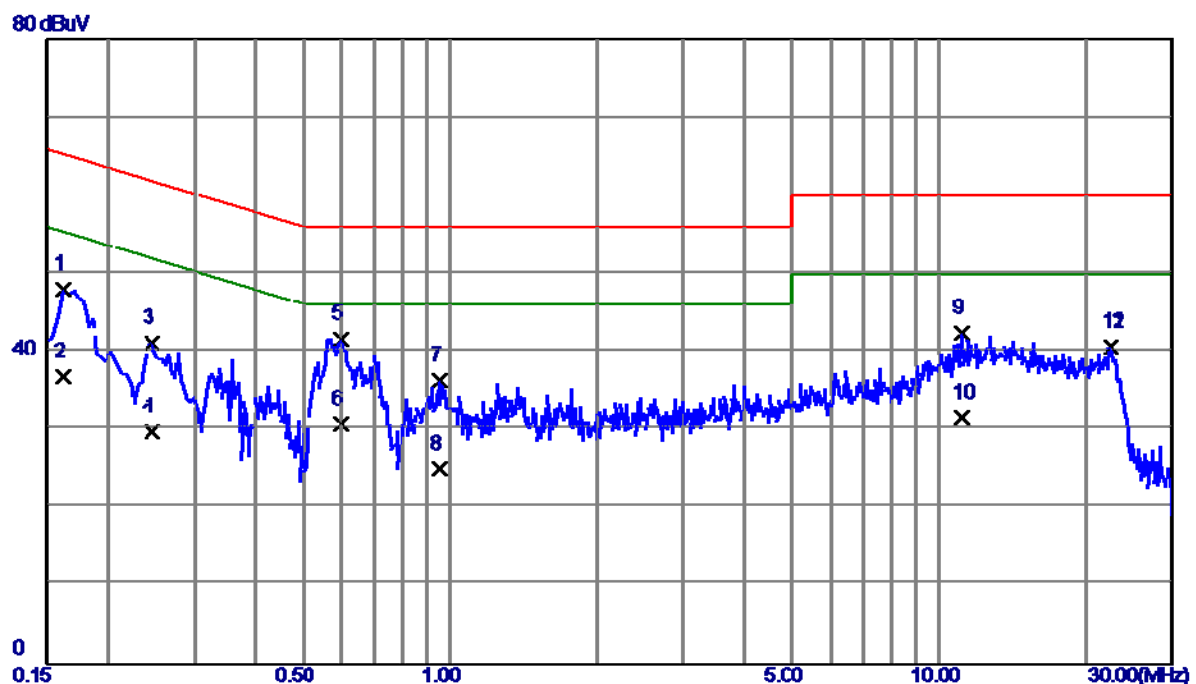


| No.  | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV | Limit<br>dBuV | Margin<br>dB | Detector |
|------|--------------|--------------------------|-------------------------|-------------------------|---------------|--------------|----------|
| 1    | 0.1620       | 38.54                    | 9.46                    | 48.00                   | 65.36         | -17.36       | QP       |
| 2    | 0.1620       | 27.34                    | 9.46                    | 36.80                   | 55.36         | -18.56       | AVG      |
| 3    | 0.2460       | 31.58                    | 9.53                    | 41.11                   | 61.89         | -20.78       | QP       |
| 4    | 0.2460       | 20.25                    | 9.53                    | 29.78                   | 51.89         | -22.11       | AVG      |
| 5    | 0.5980       | 32.22                    | 9.44                    | 41.66                   | 56.00         | -14.34       | QP       |
| 6    | 0.5980       | 21.34                    | 9.44                    | 30.78                   | 46.00         | -15.22       | AVG      |
| 7    | 0.9540       | 26.59                    | 9.66                    | 36.25                   | 56.00         | -19.75       | QP       |
| 8    | 0.9540       | 15.25                    | 9.66                    | 24.91                   | 46.00         | -21.09       | AVG      |
| 9    | 11.1780      | 32.03                    | 10.32                   | 42.35                   | 60.00         | -17.65       | QP       |
| 10   | 11.1780      | 21.25                    | 10.32                   | 31.57                   | 50.00         | -18.43       | AVG      |
| 11   | 22.5380      | 30.15                    | 10.52                   | 40.67                   | 60.00         | -19.33       | QP       |
| 12 * | 22.5380      | 30.15                    | 10.52                   | 40.67                   | 50.00         | -9.33        | AVG      |

|               |                                                    |                   |         |
|---------------|----------------------------------------------------|-------------------|---------|
| EUT           | HUAWEI MediaPad T2 7.0 (MediaPad T2 7.0 for short) | Model Name        | BGO-L03 |
| Temperature   | 25°C                                               | Relative Humidity | 53%     |
| Test Voltage  | AC 120V/60Hz                                       | Phase             | Line    |
| Test Mode     | USB copy(EUT with PC)+idle                         |                   |         |
| Note          | USB cable:HONGLIN                                  |                   |         |
| Test Engineer | Lucky Mao                                          |                   |         |

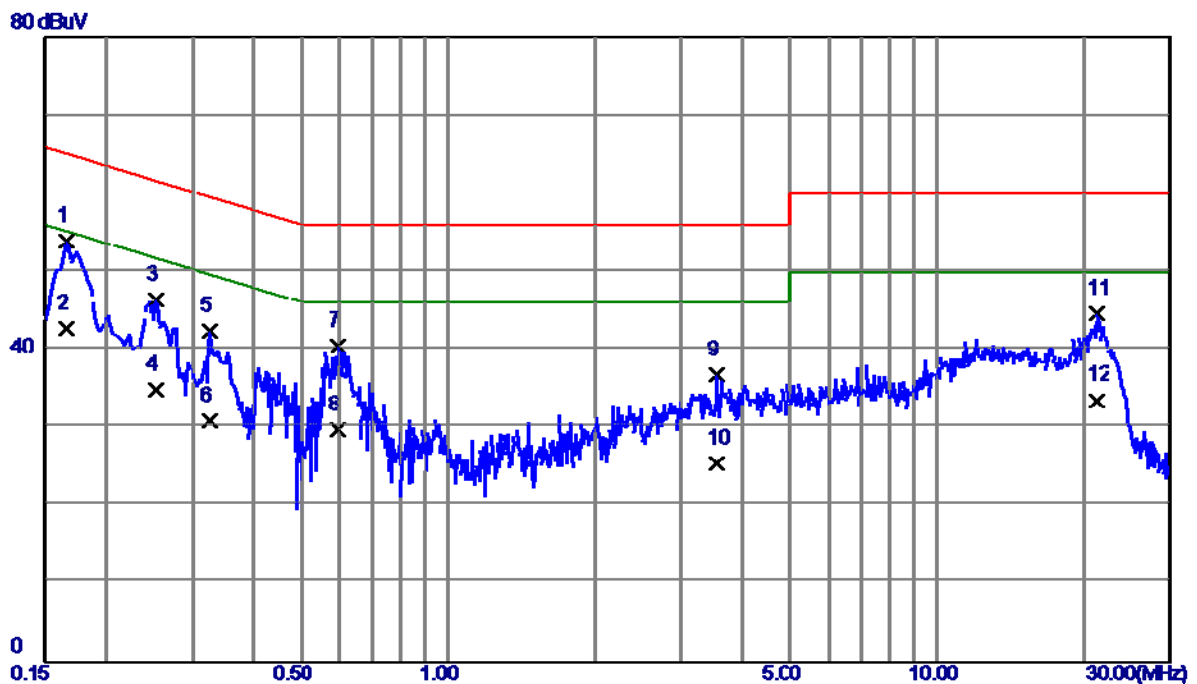


| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV | Limit<br>dBuV | Margin<br>dB | Detector |
|-----|--------------|--------------------------|-------------------------|-------------------------|---------------|--------------|----------|
| 1 * | 0.1660       | 44.43                    | 9.52                    | 53.95                   | 65.16         | -11.21       | QP       |
| 2   | 0.1660       | 33.25                    | 9.52                    | 42.77                   | 55.16         | -12.39       | AVG      |
| 3   | 0.2540       | 36.93                    | 9.53                    | 46.46                   | 61.63         | -15.17       | QP       |
| 4   | 0.2540       | 25.34                    | 9.53                    | 34.87                   | 51.63         | -16.76       | AVG      |
| 5   | 0.3260       | 32.91                    | 9.53                    | 42.44                   | 59.55         | -17.11       | QP       |
| 6   | 0.3260       | 21.34                    | 9.53                    | 30.87                   | 49.55         | -18.68       | AVG      |
| 7   | 0.5940       | 30.81                    | 9.64                    | 40.45                   | 56.00         | -15.55       | QP       |
| 8   | 0.5940       | 20.15                    | 9.64                    | 29.79                   | 46.00         | -16.21       | AVG      |
| 9   | 3.5420       | 26.72                    | 10.14                   | 36.86                   | 56.00         | -19.14       | QP       |
| 10  | 3.5420       | 15.36                    | 10.14                   | 25.50                   | 46.00         | -20.50       | AVG      |
| 11  | 21.2540      | 34.31                    | 10.40                   | 44.71                   | 60.00         | -15.29       | QP       |
| 12  | 21.2540      | 23.12                    | 10.40                   | 33.52                   | 50.00         | -16.48       | AVG      |

|               |                                                    |                   |         |
|---------------|----------------------------------------------------|-------------------|---------|
| EUT           | HUAWEI MediaPad T2 7.0 (MediaPad T2 7.0 for short) | Model Name        | BGO-L03 |
| Temperature   | 25°C                                               | Relative Humidity | 53%     |
| Test Voltage  | AC 120V/60Hz                                       | Phase             | Neutral |
| Test Mode     | USB copy(EUT with PC)+idle                         |                   |         |
| Note          | USB cable:HONGLIN                                  |                   |         |
| Test Engineer | Lucky Mao                                          |                   |         |

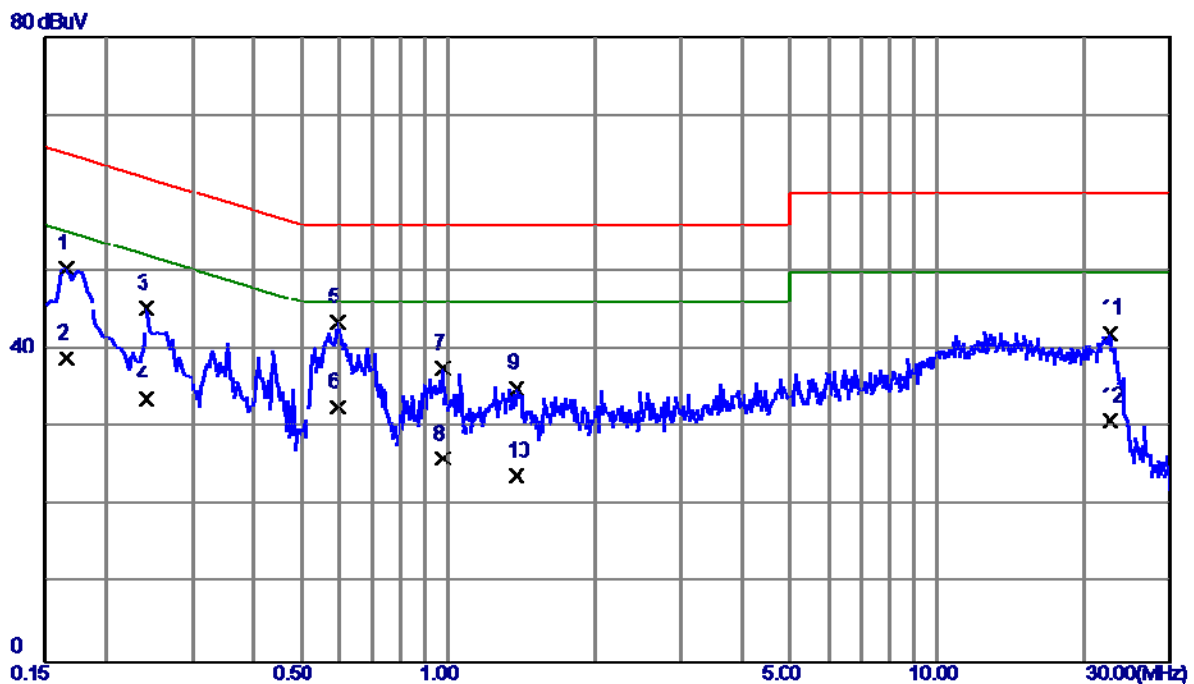

| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV | Limit<br>dBuV | Margin<br>dB | Detector |
|-----|--------------|--------------------------|-------------------------|-------------------------|---------------|--------------|----------|
| 1   | 0.1660       | 40.97                    | 9.44                    | 50.41                   | 65.16         | -14.75       | QP       |
| 2   | 0.1660       | 29.38                    | 9.44                    | 38.82                   | 55.16         | -16.34       | AVG      |
| 3   | 0.2420       | 35.75                    | 9.53                    | 45.28                   | 62.03         | -16.75       | QP       |
| 4   | 0.2420       | 24.15                    | 9.53                    | 33.68                   | 52.03         | -18.35       | AVG      |
| 5 * | 0.5940       | 34.04                    | 9.44                    | 43.48                   | 56.00         | -12.52       | QP       |
| 6   | 0.5940       | 23.25                    | 9.44                    | 32.69                   | 46.00         | -13.31       | AVG      |
| 7   | 0.9780       | 27.93                    | 9.66                    | 37.59                   | 56.00         | -18.41       | QP       |
| 8   | 0.9780       | 16.34                    | 9.66                    | 26.00                   | 46.00         | -20.00       | AVG      |
| 9   | 1.3779       | 25.42                    | 9.67                    | 35.09                   | 56.00         | -20.91       | QP       |
| 10  | 1.3779       | 14.12                    | 9.67                    | 23.79                   | 46.00         | -22.21       | AVG      |
| 11  | 22.6500      | 31.56                    | 10.52                   | 42.08                   | 60.00         | -17.92       | QP       |
| 12  | 22.6500      | 20.34                    | 10.52                   | 30.86                   | 50.00         | -19.14       | AVG      |


|               |                                                    |                   |         |
|---------------|----------------------------------------------------|-------------------|---------|
| EUT           | HUAWEI MediaPad T2 7.0 (MediaPad T2 7.0 for short) | Model Name        | BGO-L03 |
| Temperature   | 25°C                                               | Relative Humidity | 53%     |
| Test Voltage  | AC 120V/60Hz                                       | Phase             | Line    |
| Test Mode     | USB copy(EUT with PC)+idle                         |                   |         |
| Note          | USB cable:Luxshare                                 |                   |         |
| Test Engineer | Lucky Mao                                          |                   |         |

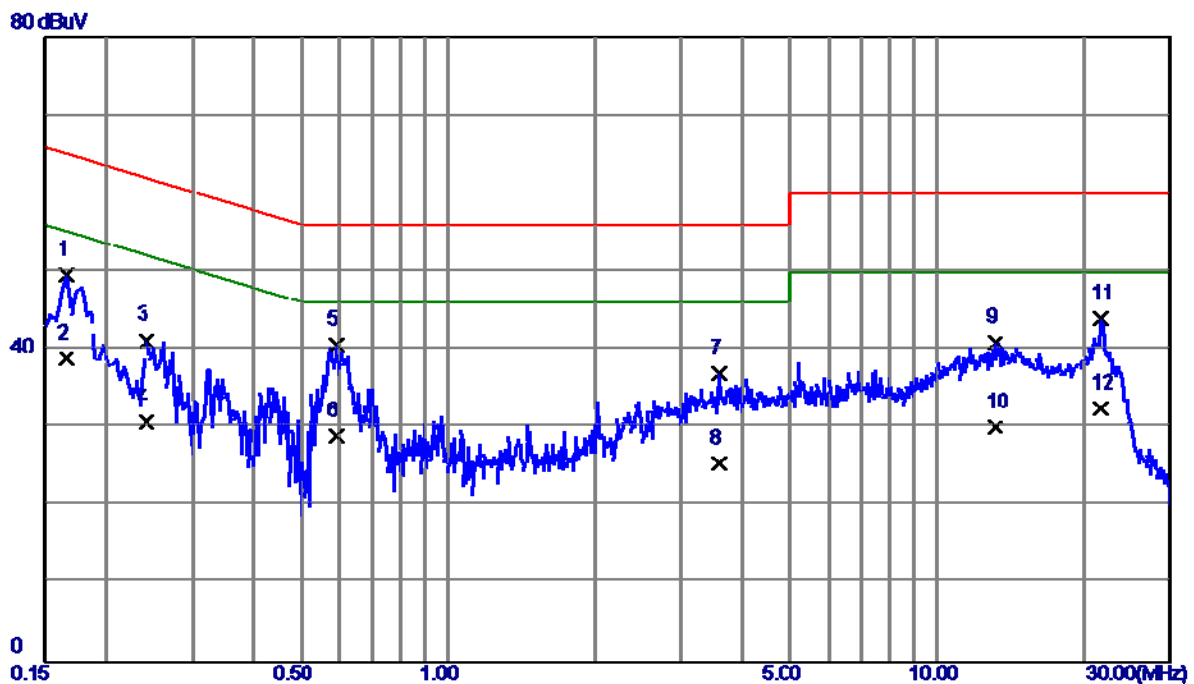

| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV | Limit<br>dBuV | Margin<br>dB | Detector |
|-----|--------------|--------------------------|-------------------------|-------------------------|---------------|--------------|----------|
| 1   | 0.1660       | 40.08                    | 9.52                    | 49.60                   | 65.16         | -15.56       | QP       |
| 2   | 0.1660       | 29.38                    | 9.52                    | 38.90                   | 55.16         | -16.26       | AVG      |
| 3   | 0.2420       | 31.67                    | 9.53                    | 41.20                   | 62.03         | -20.83       | QP       |
| 4   | 0.2420       | 21.25                    | 9.53                    | 30.78                   | 52.03         | -21.25       | AVG      |
| 5 * | 0.5899       | 30.99                    | 9.64                    | 40.63                   | 56.00         | -15.37       | QP       |
| 6   | 0.5899       | 19.38                    | 9.64                    | 29.02                   | 46.00         | -16.98       | AVG      |
| 7   | 3.5780       | 26.87                    | 10.15                   | 37.02                   | 56.00         | -18.98       | QP       |
| 8   | 3.5780       | 15.25                    | 10.15                   | 25.40                   | 46.00         | -20.60       | AVG      |
| 9   | 13.1220      | 30.68                    | 10.30                   | 40.98                   | 60.00         | -19.02       | QP       |
| 10  | 13.1220      | 19.80                    | 10.30                   | 30.10                   | 50.00         | -19.90       | AVG      |
| 11  | 21.6340      | 33.67                    | 10.40                   | 44.07                   | 60.00         | -15.93       | QP       |
| 12  | 21.6340      | 22.13                    | 10.40                   | 32.53                   | 50.00         | -17.47       | AVG      |


|               |                                                    |                   |         |
|---------------|----------------------------------------------------|-------------------|---------|
| EUT           | HUAWEI MediaPad T2 7.0 (MediaPad T2 7.0 for short) | Model Name        | BGO-L03 |
| Temperature   | 25°C                                               | Relative Humidity | 53%     |
| Test Voltage  | AC 120V/60Hz                                       | Phase             | Neutral |
| Test Mode     | USB copy(EUT with PC)+idle                         |                   |         |
| Note          | USB cable:Luxshare                                 |                   |         |
| Test Engineer | Lucky Mao                                          |                   |         |

80 dBuV

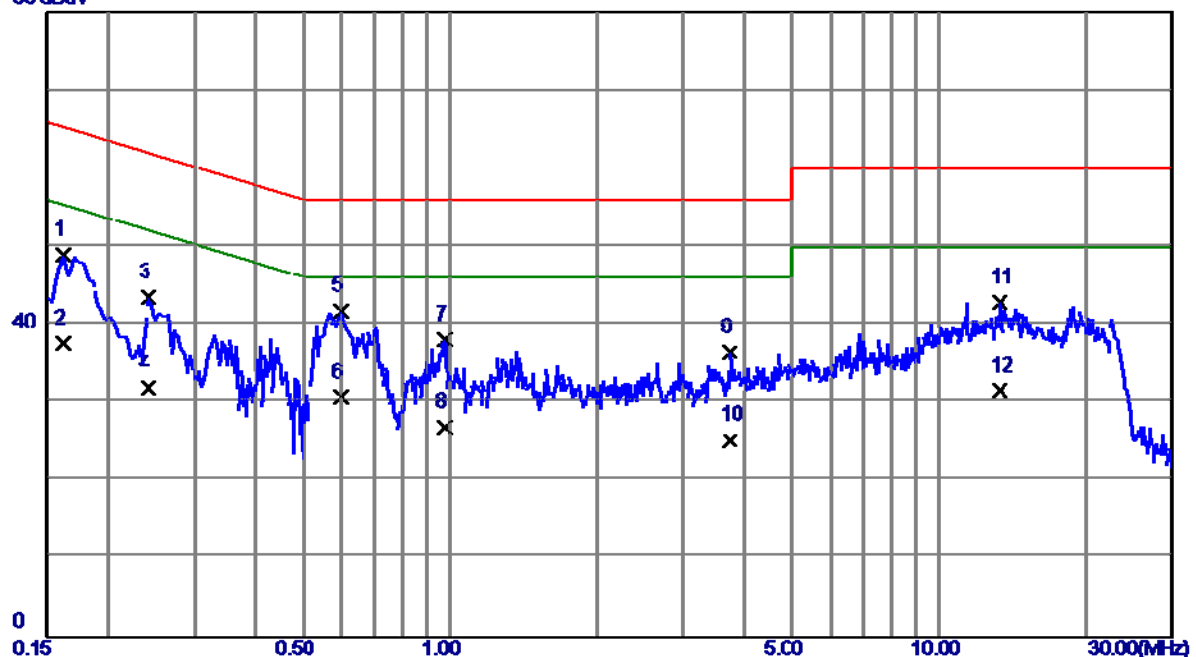


| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV | Limit<br>dBuV | Margin<br>dB | Detector |
|-----|--------------|--------------------------|-------------------------|-------------------------|---------------|--------------|----------|
| 1   | 0.1620       | 39.57                    | 9.46                    | 49.03                   | 65.36         | -16.33       | QP       |
| 2   | 0.1620       | 28.14                    | 9.46                    | 37.60                   | 55.36         | -17.76       | AVG      |
| 3   | 0.2420       | 33.93                    | 9.53                    | 43.46                   | 62.03         | -18.57       | QP       |
| 4   | 0.2420       | 22.34                    | 9.53                    | 31.87                   | 52.03         | -20.16       | AVG      |
| 5 * | 0.5980       | 32.28                    | 9.44                    | 41.72                   | 56.00         | -14.28       | QP       |
| 6   | 0.5980       | 21.25                    | 9.44                    | 30.69                   | 46.00         | -15.31       | AVG      |
| 7   | 0.9780       | 28.49                    | 9.66                    | 38.15                   | 56.00         | -17.85       | QP       |
| 8   | 0.9780       | 17.23                    | 9.66                    | 26.89                   | 46.00         | -19.11       | AVG      |
| 9   | 3.7300       | 26.59                    | 9.86                    | 36.45                   | 56.00         | -19.55       | QP       |
| 10  | 3.7300       | 15.34                    | 9.86                    | 25.20                   | 46.00         | -20.80       | AVG      |
| 11  | 13.2860      | 32.47                    | 10.34                   | 42.81                   | 60.00         | -17.19       | QP       |
| 12  | 13.2860      | 21.25                    | 10.34                   | 31.59                   | 50.00         | -18.41       | AVG      |

|               |                                                    |                   |         |
|---------------|----------------------------------------------------|-------------------|---------|
| EUT           | HUAWEI MediaPad T2 7.0 (MediaPad T2 7.0 for short) | Model Name        | BGO-L03 |
| Temperature   | 25°C                                               | Relative Humidity | 53%     |
| Test Voltage  | AC 120V/60Hz                                       | Phase             | Line    |
| Test Mode     | Adapter+WIFI+BT+GPS+Camera On                      |                   |         |
| Note          | Adapter:BYD+USB cable:Luxshare                     |                   |         |
| Test Engineer | Lucky Mao                                          |                   |         |

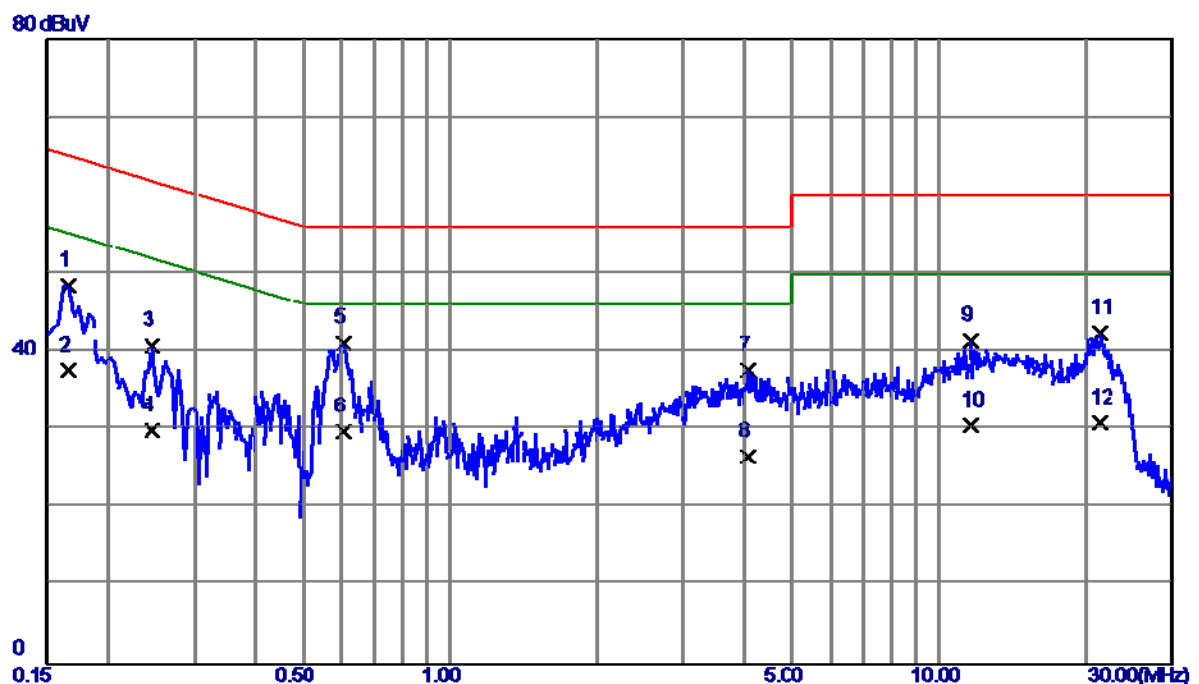


| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV | Limit<br>dBuV | Margin<br>dB | Detector |
|-----|--------------|--------------------------|-------------------------|-------------------------|---------------|--------------|----------|
| 1   | 0.1660       | 39.00                    | 9.52                    | 48.52                   | 65.16         | -16.64       | QP       |
| 2   | 0.1660       | 28.14                    | 9.52                    | 37.66                   | 55.16         | -17.50       | AVG      |
| 3   | 0.2460       | 31.34                    | 9.53                    | 40.87                   | 61.89         | -21.02       | QP       |
| 4   | 0.2460       | 20.34                    | 9.53                    | 29.87                   | 51.89         | -22.02       | AVG      |
| 5 * | 0.6060       | 31.48                    | 9.64                    | 41.12                   | 56.00         | -14.88       | QP       |
| 6   | 0.6060       | 20.14                    | 9.64                    | 29.78                   | 46.00         | -16.22       | AVG      |
| 7   | 4.0660       | 27.41                    | 10.18                   | 37.59                   | 56.00         | -18.41       | QP       |
| 8   | 4.0660       | 16.34                    | 10.18                   | 26.52                   | 46.00         | -19.48       | AVG      |
| 9   | 11.6300      | 31.20                    | 10.26                   | 41.46                   | 60.00         | -18.54       | QP       |
| 10  | 11.6300      | 20.30                    | 10.26                   | 30.56                   | 50.00         | -19.44       | AVG      |
| 11  | 21.2900      | 31.95                    | 10.40                   | 42.35                   | 60.00         | -17.65       | QP       |
| 12  | 21.2900      | 20.50                    | 10.40                   | 30.90                   | 50.00         | -19.10       | AVG      |

|               |                                                    |                   |         |
|---------------|----------------------------------------------------|-------------------|---------|
| EUT           | HUAWEI MediaPad T2 7.0 (MediaPad T2 7.0 for short) | Model Name        | BGO-L03 |
| Temperature   | 25°C                                               | Relative Humidity | 53%     |
| Test Voltage  | AC 120V/60Hz                                       | Phase             | Neutral |
| Test Mode     | Adapter+WIFI+BT+GPS+Camera On                      |                   |         |
| Note          | Adapter:BYD+USB cable:Luxshare                     |                   |         |
| Test Engineer | Lucky Mao                                          |                   |         |

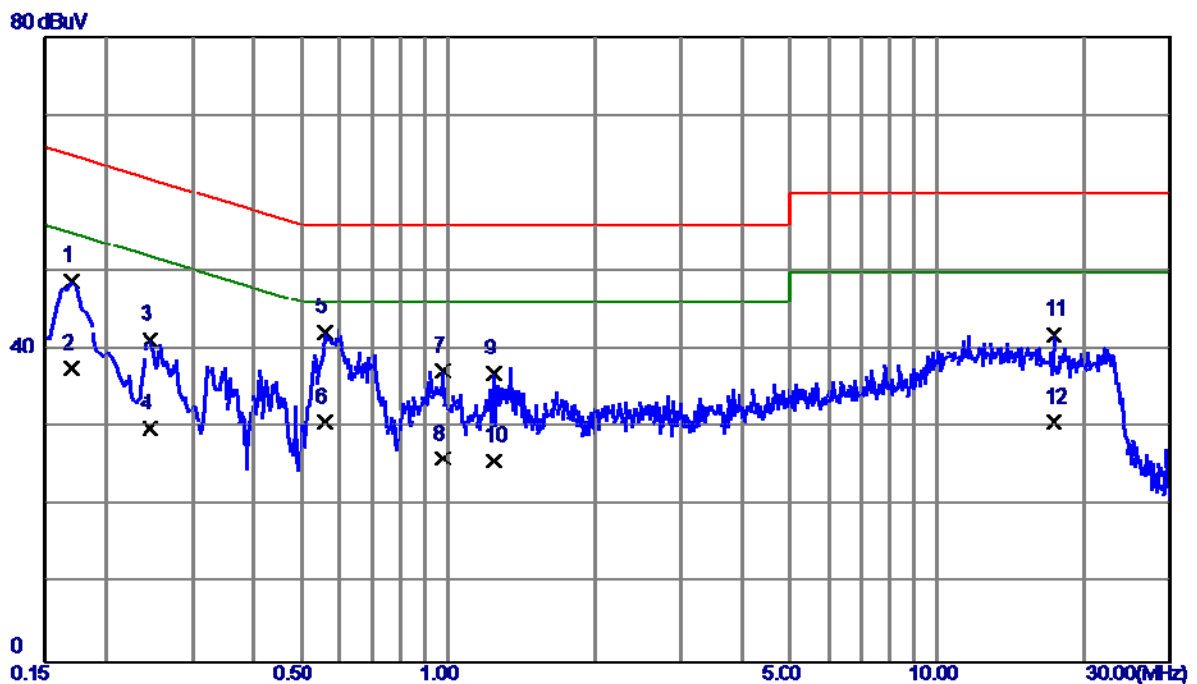


| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV | Limit<br>dBuV | Margin<br>dB | Detector |
|-----|--------------|--------------------------|-------------------------|-------------------------|---------------|--------------|----------|
| 1   | 0.1700       | 39.31                    | 9.42                    | 48.73                   | 64.96         | -16.23       | QP       |
| 2   | 0.1700       | 28.14                    | 9.42                    | 37.56                   | 54.96         | -17.40       | AVG      |
| 3   | 0.2460       | 31.75                    | 9.53                    | 41.28                   | 61.89         | -20.61       | QP       |
| 4   | 0.2460       | 20.34                    | 9.53                    | 29.87                   | 51.89         | -22.02       | AVG      |
| 5 * | 0.5620       | 32.75                    | 9.44                    | 42.19                   | 56.00         | -13.81       | QP       |
| 6   | 0.5620       | 21.25                    | 9.44                    | 30.69                   | 46.00         | -15.31       | AVG      |
| 7   | 0.9780       | 27.58                    | 9.66                    | 37.24                   | 56.00         | -18.76       | QP       |
| 8   | 0.9780       | 16.34                    | 9.66                    | 26.00                   | 46.00         | -20.00       | AVG      |
| 9   | 1.2420       | 27.26                    | 9.67                    | 36.93                   | 56.00         | -19.07       | QP       |
| 10  | 1.2420       | 16.14                    | 9.67                    | 25.81                   | 46.00         | -20.19       | AVG      |
| 11  | 17.3340      | 31.42                    | 10.43                   | 41.85                   | 60.00         | -18.15       | QP       |
| 12  | 17.3340      | 20.25                    | 10.43                   | 30.68                   | 50.00         | -19.32       | AVG      |

|               |                                                    |                   |         |
|---------------|----------------------------------------------------|-------------------|---------|
| EUT           | HUAWEI MediaPad T2 7.0 (MediaPad T2 7.0 for short) | Model Name        | BGO-L03 |
| Temperature   | 25°C                                               | Relative Humidity | 53%     |
| Test Voltage  | AC 120V/60Hz                                       | Phase             | Line    |
| Test Mode     | Adapter+WIFI+BT+GPS+Camera On                      |                   |         |
| Note          | Adapter:Huntkey+USB cable:Luxshare                 |                   |         |
| Test Engineer | Lucky Mao                                          |                   |         |

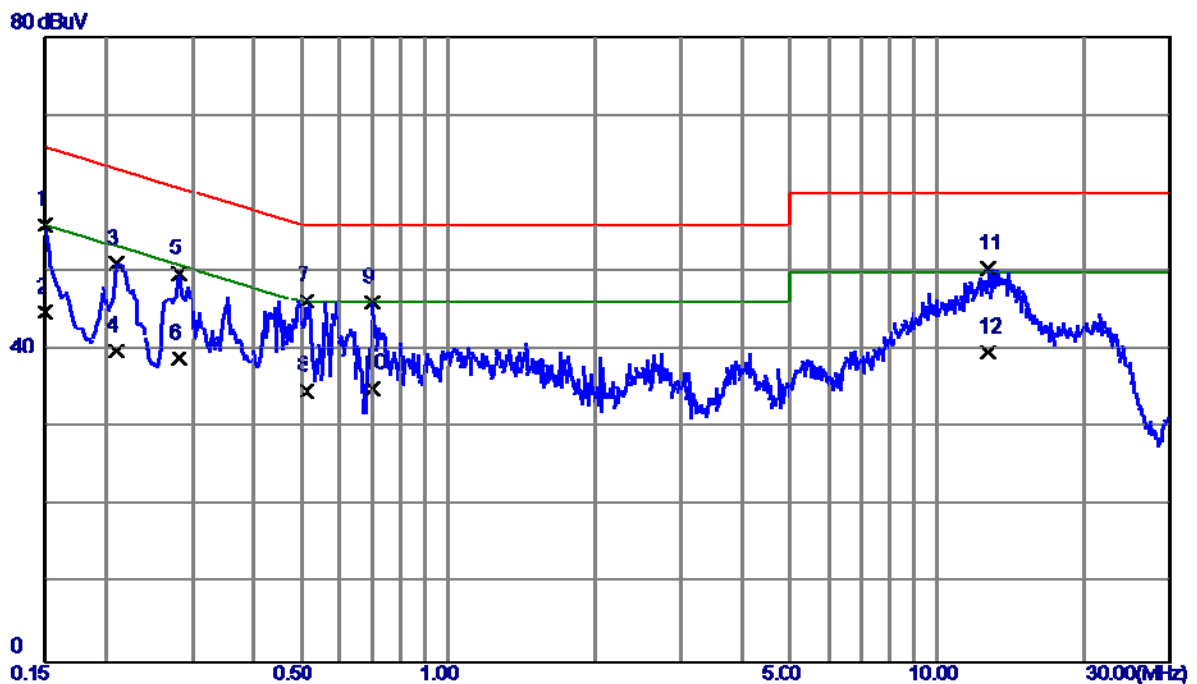

| No.  | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV | Limit<br>dBuV | Margin<br>dB | Detector |
|------|--------------|--------------------------|-------------------------|-------------------------|---------------|--------------|----------|
| 1    | 0.1500       | 46.48                    | 9.52                    | 56.00                   | 66.00         | -10.00       | QP       |
| 2    | 0.1500       | 35.25                    | 9.52                    | 44.77                   | 56.00         | -11.23       | AVG      |
| 3    | 0.2100       | 41.56                    | 9.53                    | 51.09                   | 63.21         | -12.12       | QP       |
| 4    | 0.2100       | 30.24                    | 9.53                    | 39.77                   | 53.21         | -13.44       | AVG      |
| 5    | 0.2819       | 40.17                    | 9.53                    | 49.70                   | 60.76         | -11.06       | QP       |
| 6    | 0.2819       | 29.36                    | 9.53                    | 38.89                   | 50.76         | -11.87       | AVG      |
| 7    | 0.5140       | 36.60                    | 9.64                    | 46.24                   | 56.00         | -9.76        | QP       |
| 8    | 0.5140       | 25.14                    | 9.64                    | 34.78                   | 46.00         | -11.22       | AVG      |
| 9    | 0.7019       | 36.45                    | 9.65                    | 46.10                   | 56.00         | -9.90        | QP       |
| 10   | 0.7019       | 25.32                    | 9.65                    | 34.97                   | 46.00         | -11.03       | AVG      |
| 11 * | 12.6820      | 40.06                    | 10.29                   | 50.35                   | 60.00         | -9.65        | QP       |
| 12   | 12.6820      | 29.38                    | 10.29                   | 39.67                   | 50.00         | -10.33       | AVG      |


|               |                                                    |                   |         |
|---------------|----------------------------------------------------|-------------------|---------|
| EUT           | HUAWEI MediaPad T2 7.0 (MediaPad T2 7.0 for short) | Model Name        | BGO-L03 |
| Temperature   | 25°C                                               | Relative Humidity | 53%     |
| Test Voltage  | AC 120V/60Hz                                       | Phase             | Neutral |
| Test Mode     | Adapter+WIFI+BT+GPS+Camera On                      |                   |         |
| Note          | Adapter:Huntkey+USB cable:Luxshare                 |                   |         |
| Test Engineer | Lucky Mao                                          |                   |         |

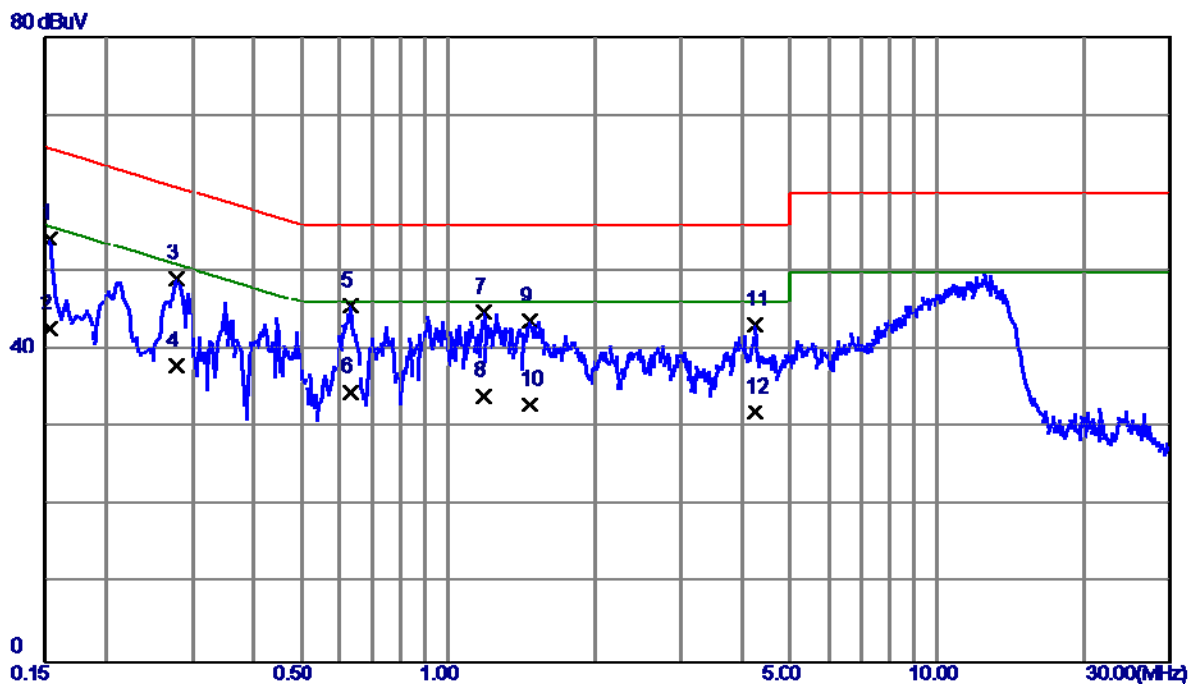

| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV | Limit<br>dBuV | Margin<br>dB | Detector |
|-----|--------------|--------------------------|-------------------------|-------------------------|---------------|--------------|----------|
| 1   | 0.1539       | 44.68                    | 9.50                    | 54.18                   | 65.79         | -11.61       | QP       |
| 2   | 0.1539       | 33.25                    | 9.50                    | 42.75                   | 55.79         | -13.04       | AVG      |
| 3   | 0.2779       | 39.61                    | 9.53                    | 49.14                   | 60.88         | -11.74       | QP       |
| 4   | 0.2779       | 28.34                    | 9.53                    | 37.87                   | 50.88         | -13.01       | AVG      |
| 5 * | 0.6300       | 36.23                    | 9.44                    | 45.67                   | 56.00         | -10.33       | QP       |
| 6   | 0.6300       | 25.14                    | 9.44                    | 34.58                   | 46.00         | -11.42       | AVG      |
| 7   | 1.1820       | 35.14                    | 9.67                    | 44.81                   | 56.00         | -11.19       | QP       |
| 8   | 1.1820       | 24.34                    | 9.67                    | 34.01                   | 46.00         | -11.99       | AVG      |
| 9   | 1.4700       | 34.02                    | 9.67                    | 43.69                   | 56.00         | -12.31       | QP       |
| 10  | 1.4700       | 23.25                    | 9.67                    | 32.92                   | 46.00         | -13.08       | AVG      |
| 11  | 4.2500       | 33.36                    | 9.91                    | 43.27                   | 56.00         | -12.73       | QP       |
| 12  | 4.2500       | 22.15                    | 9.91                    | 32.06                   | 46.00         | -13.94       | AVG      |


|               |                                                    |                   |         |
|---------------|----------------------------------------------------|-------------------|---------|
| EUT           | HUAWEI MediaPad T2 7.0 (MediaPad T2 7.0 for short) | Model Name        | BGO-L03 |
| Temperature   | 25°C                                               | Relative Humidity | 53%     |
| Test Voltage  | AC 120V/60Hz                                       | Phase             | Line    |
| Test Mode     | Adapter+WIFI+BT+GPS+Camera On                      |                   |         |
| Note          | Adapter:Phitek+USB cable:Luxshare                  |                   |         |
| Test Engineer | Lucky Mao                                          |                   |         |

80 dBuV

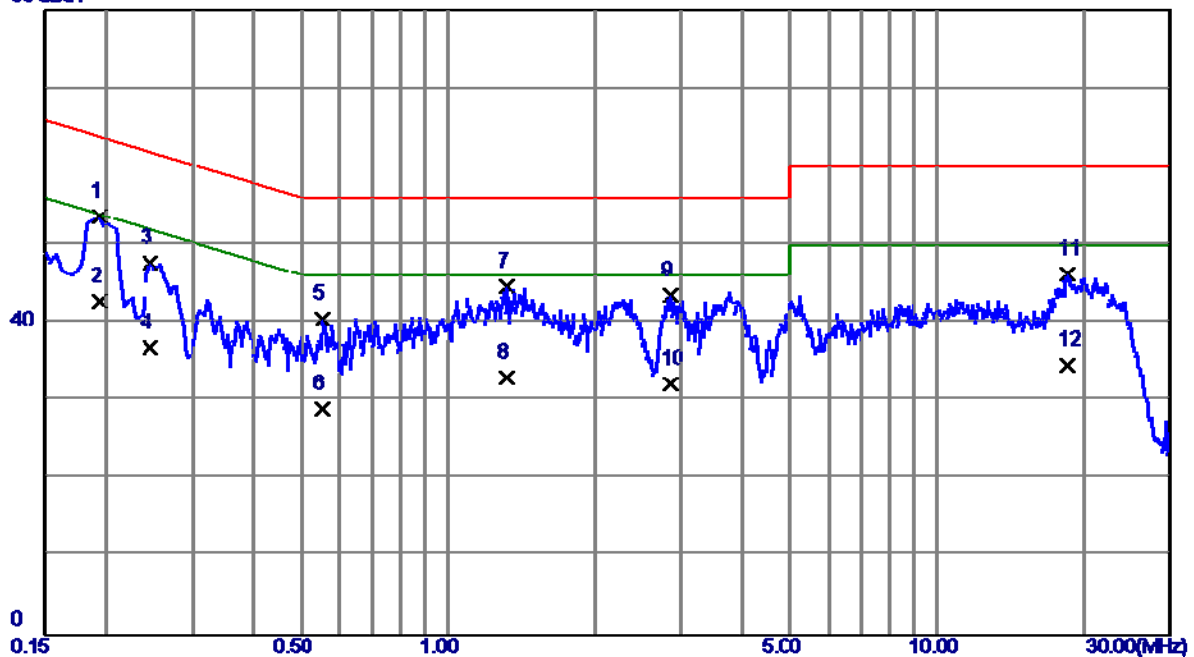


| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV | Limit<br>dBuV | Margin<br>dB | Detector |
|-----|--------------|--------------------------|-------------------------|-------------------------|---------------|--------------|----------|
| 1 * | 0.1940       | 44.03                    | 9.53                    | 53.56                   | 63.86         | -10.30       | QP       |
| 2   | 0.1940       | 33.25                    | 9.53                    | 42.78                   | 53.86         | -11.08       | AVG      |
| 3   | 0.2460       | 38.20                    | 9.53                    | 47.73                   | 61.89         | -14.16       | QP       |
| 4   | 0.2460       | 27.34                    | 9.53                    | 36.87                   | 51.89         | -15.02       | AVG      |
| 5   | 0.5540       | 30.79                    | 9.64                    | 40.43                   | 56.00         | -15.57       | QP       |
| 6   | 0.5540       | 19.25                    | 9.64                    | 28.89                   | 46.00         | -17.11       | AVG      |
| 7   | 1.3180       | 34.90                    | 9.81                    | 44.71                   | 56.00         | -11.29       | QP       |
| 8   | 1.3180       | 23.14                    | 9.81                    | 32.95                   | 46.00         | -13.05       | AVG      |
| 9   | 2.8540       | 33.44                    | 10.09                   | 43.53                   | 56.00         | -12.47       | QP       |
| 10  | 2.8540       | 22.14                    | 10.09                   | 32.23                   | 46.00         | -13.77       | AVG      |
| 11  | 18.5500      | 35.82                    | 10.39                   | 46.21                   | 60.00         | -13.79       | QP       |
| 12  | 18.5500      | 24.12                    | 10.39                   | 34.51                   | 50.00         | -15.49       | AVG      |

|               |                                                    |                   |         |
|---------------|----------------------------------------------------|-------------------|---------|
| EUT           | HUAWEI MediaPad T2 7.0 (MediaPad T2 7.0 for short) | Model Name        | BGO-L03 |
| Temperature   | 25°C                                               | Relative Humidity | 53%     |
| Test Voltage  | AC 120V/60Hz                                       | Phase             | Neutral |
| Test Mode     | Adapter+WIFI+BT+GPS+Camera On                      |                   |         |
| Note          | Adapter:Phitek+USB cable:Luxshare                  |                   |         |
| Test Engineer | Lucky Mao                                          |                   |         |

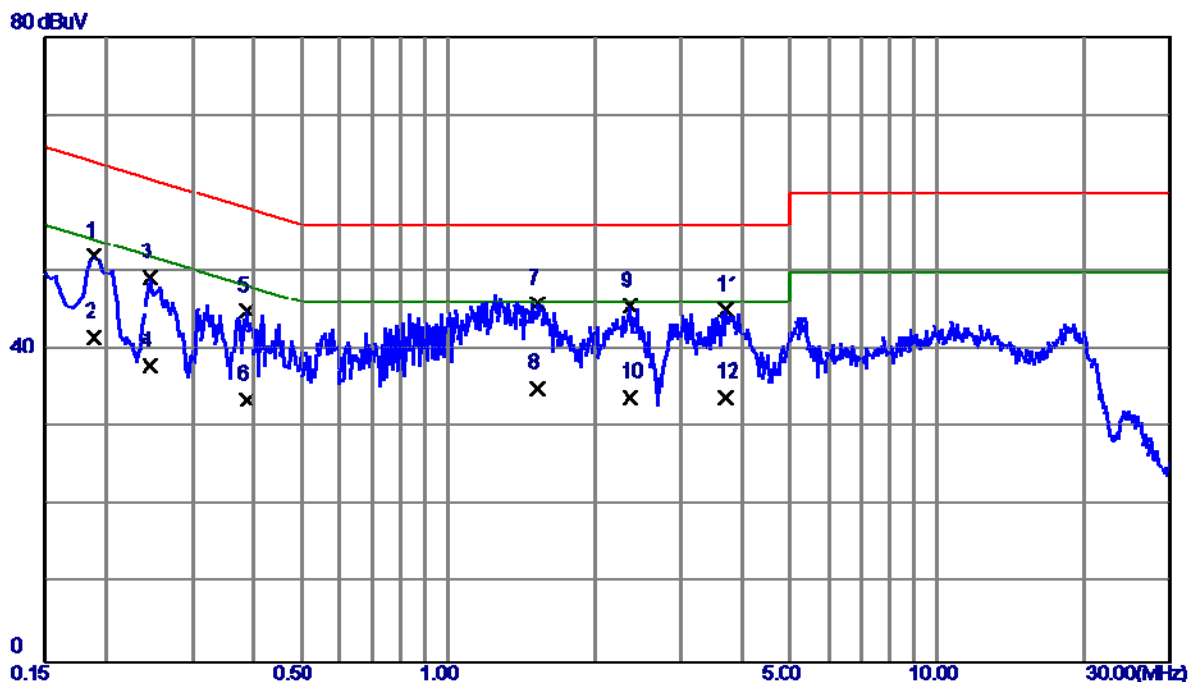


| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV | Limit<br>dBuV | Margin<br>dB | Detector |
|-----|--------------|--------------------------|-------------------------|-------------------------|---------------|--------------|----------|
| 1   | 0.1884       | 42.46                    | 9.49                    | 51.95                   | 64.11         | -12.16       | QP       |
| 2   | 0.1884       | 32.14                    | 9.49                    | 41.63                   | 54.11         | -12.48       | AVG      |
| 3   | 0.2460       | 39.69                    | 9.53                    | 49.22                   | 61.89         | -12.67       | QP       |
| 4   | 0.2460       | 28.34                    | 9.53                    | 37.87                   | 51.89         | -14.02       | AVG      |
| 5   | 0.3860       | 35.43                    | 9.46                    | 44.89                   | 58.15         | -13.26       | QP       |
| 6   | 0.3860       | 24.16                    | 9.46                    | 33.62                   | 48.15         | -14.53       | AVG      |
| 7 * | 1.5300       | 36.28                    | 9.68                    | 45.96                   | 56.00         | -10.04       | QP       |
| 8   | 1.5300       | 25.34                    | 9.68                    | 35.02                   | 46.00         | -10.98       | AVG      |
| 9   | 2.3620       | 35.81                    | 9.76                    | 45.57                   | 56.00         | -10.43       | QP       |
| 10  | 2.3620       | 24.23                    | 9.76                    | 33.99                   | 46.00         | -12.01       | AVG      |
| 11  | 3.6900       | 35.24                    | 9.86                    | 45.10                   | 56.00         | -10.90       | QP       |
| 12  | 3.6900       | 24.12                    | 9.86                    | 33.98                   | 46.00         | -12.02       | AVG      |

|               |                                                       |                   |         |
|---------------|-------------------------------------------------------|-------------------|---------|
| EUT           | HUAWEI MediaPad T2<br>7.0 (MediaPad T2 7.0 for short) | Model Name        | BGO-L03 |
| Temperature   | 25°C                                                  | Relative Humidity | 53%     |
| Test Voltage  | AC 120V/60Hz                                          | Phase             | Line    |
| Test Mode     | Adapter+playing+speaker                               |                   |         |
| Note          | Adapter:Huntkey+USB cable:Luxshare                    |                   |         |
| Test Engineer | Lucky Mao                                             |                   |         |

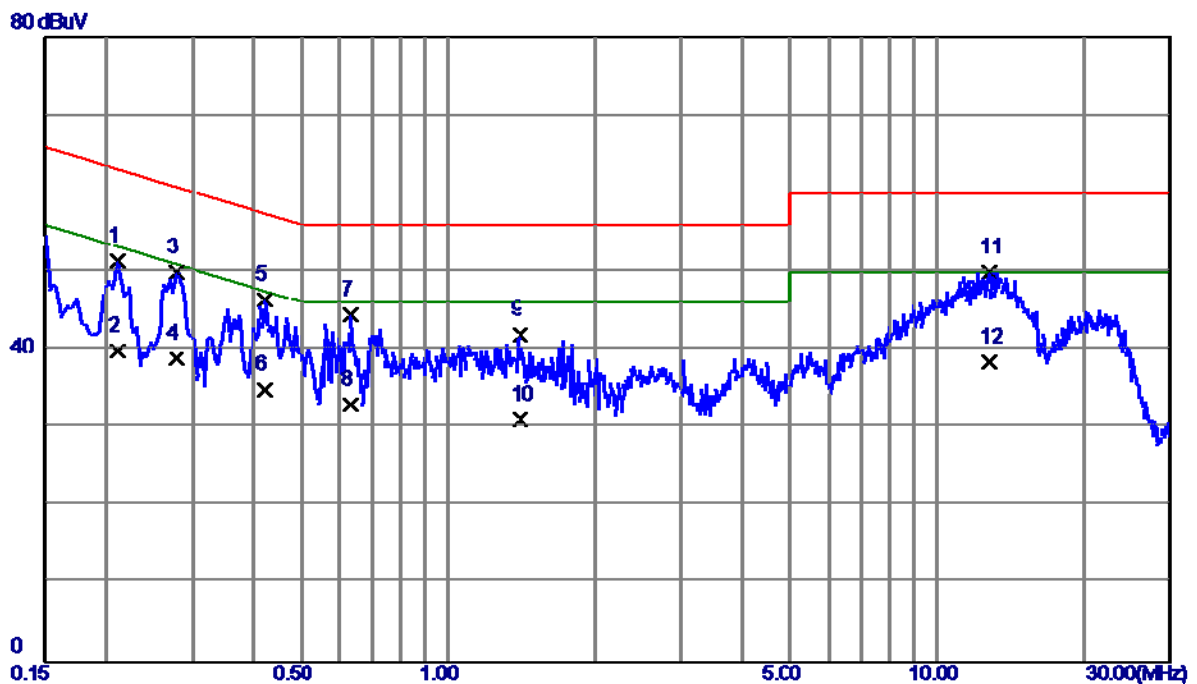


| No.  | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV | Limit<br>dBuV | Margin<br>dB | Detector |
|------|--------------|--------------------------|-------------------------|-------------------------|---------------|--------------|----------|
| 1    | 0.2116       | 41.86                    | 9.53                    | 51.39                   | 63.14         | -11.75       | QP       |
| 2    | 0.2116       | 30.25                    | 9.53                    | 39.78                   | 53.14         | -13.36       | AVG      |
| 3    | 0.2787       | 40.36                    | 9.53                    | 49.89                   | 60.85         | -10.96       | QP       |
| 4    | 0.2787       | 29.34                    | 9.53                    | 38.87                   | 50.85         | -11.98       | AVG      |
| 5    | 0.4220       | 36.88                    | 9.56                    | 46.44                   | 57.41         | -10.97       | QP       |
| 6    | 0.4220       | 25.34                    | 9.56                    | 34.90                   | 47.41         | -12.51       | AVG      |
| 7    | 0.6300       | 34.84                    | 9.64                    | 44.48                   | 56.00         | -11.52       | QP       |
| 8    | 0.6300       | 23.25                    | 9.64                    | 32.89                   | 46.00         | -13.11       | AVG      |
| 9    | 1.4020       | 32.06                    | 9.84                    | 41.90                   | 56.00         | -14.10       | QP       |
| 10   | 1.4020       | 21.25                    | 9.84                    | 31.09                   | 46.00         | -14.91       | AVG      |
| 11 * | 12.7580      | 39.61                    | 10.29                   | 49.90                   | 60.00         | -10.10       | QP       |
| 12   | 12.7580      | 28.15                    | 10.29                   | 38.44                   | 50.00         | -11.56       | AVG      |

|               |                                                    |                   |         |
|---------------|----------------------------------------------------|-------------------|---------|
| EUT           | HUAWEI MediaPad T2 7.0 (MediaPad T2 7.0 for short) | Model Name        | BGO-L03 |
| Temperature   | 25°C                                               | Relative Humidity | 53%     |
| Test Voltage  | AC 120V/60Hz                                       | Phase             | Neutral |
| Test Mode     | Adapter+playing+speaker                            |                   |         |
| Note          | Adapter:Huntkey+USB cable:Luxshare                 |                   |         |
| Test Engineer | Lucky Mao                                          |                   |         |

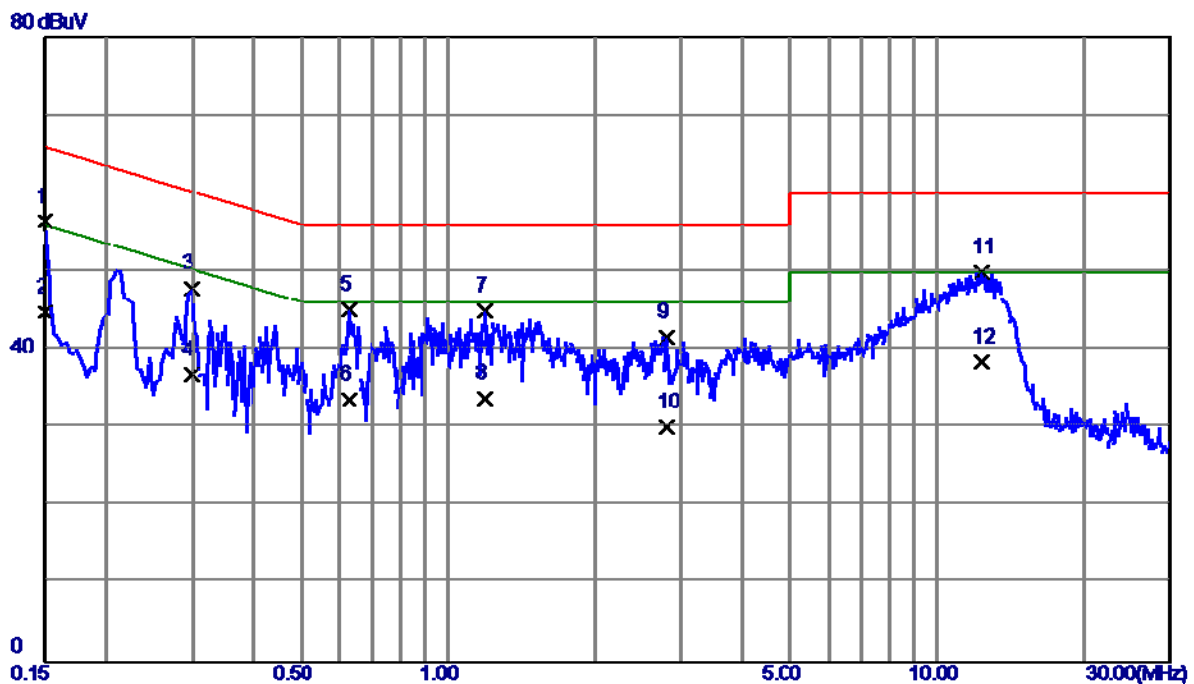


| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV | Limit<br>dBuV | Margin<br>dB | Detector |
|-----|--------------|--------------------------|-------------------------|-------------------------|---------------|--------------|----------|
| 1 * | 0.1500       | 46.88                    | 9.52                    | 56.40                   | 66.00         | -9.60        | QP       |
| 2   | 0.1500       | 35.25                    | 9.52                    | 44.77                   | 56.00         | -11.23       | AVG      |
| 3   | 0.2980       | 38.35                    | 9.53                    | 47.88                   | 60.30         | -12.42       | QP       |
| 4   | 0.2980       | 27.34                    | 9.53                    | 36.87                   | 50.30         | -13.43       | AVG      |
| 5   | 0.6260       | 35.73                    | 9.44                    | 45.17                   | 56.00         | -10.83       | QP       |
| 6   | 0.6260       | 24.14                    | 9.44                    | 33.58                   | 46.00         | -12.42       | AVG      |
| 7   | 1.1900       | 35.29                    | 9.67                    | 44.96                   | 56.00         | -11.04       | QP       |
| 8   | 1.1900       | 24.15                    | 9.67                    | 33.82                   | 46.00         | -12.18       | AVG      |
| 9   | 2.7900       | 31.86                    | 9.79                    | 41.65                   | 56.00         | -14.35       | QP       |
| 10  | 2.7900       | 20.34                    | 9.79                    | 30.13                   | 46.00         | -15.87       | AVG      |
| 11  | 12.3380      | 39.66                    | 10.33                   | 49.99                   | 60.00         | -10.01       | QP       |
| 12  | 12.3380      | 28.12                    | 10.33                   | 38.45                   | 50.00         | -11.55       | AVG      |

|               |                                                     |                   |         |
|---------------|-----------------------------------------------------|-------------------|---------|
| EUT           | HUAWEI MediaPad T2 7.0 (MediaPad T2 7.0 for short)  | Model Name        | BGO-L03 |
| Temperature   | 25°C                                                | Relative Humidity | 53%     |
| Test Voltage  | AC 120V/60Hz                                        | Phase             | Line    |
| Test Mode     | Adapter+playing+Earphone                            |                   |         |
| Note          | Adapter:Huntkey+USB cable:Luxshare+Earphone:GoerTek |                   |         |
| Test Engineer | Lucky Mao                                           |                   |         |

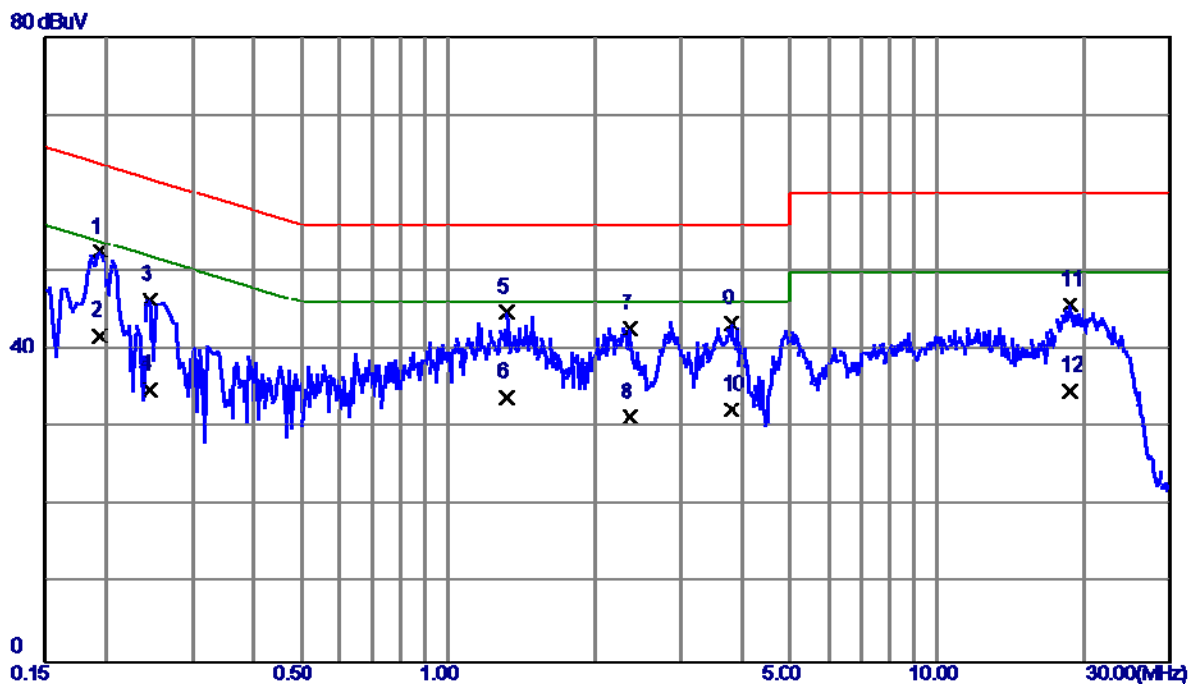


| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV | Limit<br>dBuV | Margin<br>dB | Detector |
|-----|--------------|--------------------------|-------------------------|-------------------------|---------------|--------------|----------|
| 1   | 0.1940       | 43.03                    | 9.53                    | 52.56                   | 63.86         | -11.30       | QP       |
| 2   | 0.1940       | 32.25                    | 9.53                    | 41.78                   | 53.86         | -12.08       | AVG      |
| 3   | 0.2460       | 36.87                    | 9.53                    | 46.40                   | 61.89         | -15.49       | QP       |
| 4   | 0.2460       | 25.34                    | 9.53                    | 34.87                   | 51.89         | -17.02       | AVG      |
| 5 * | 1.3180       | 35.00                    | 9.81                    | 44.81                   | 56.00         | -11.19       | QP       |
| 6   | 1.3180       | 24.12                    | 9.81                    | 33.93                   | 46.00         | -12.07       | AVG      |
| 7   | 2.3580       | 32.73                    | 10.03                   | 42.76                   | 56.00         | -13.24       | QP       |
| 8   | 2.3580       | 21.34                    | 10.03                   | 31.37                   | 46.00         | -14.63       | AVG      |
| 9   | 3.7940       | 33.16                    | 10.17                   | 43.33                   | 56.00         | -12.67       | QP       |
| 10  | 3.7940       | 22.15                    | 10.17                   | 32.32                   | 46.00         | -13.68       | AVG      |
| 11  | 18.7220      | 35.35                    | 10.39                   | 45.74                   | 60.00         | -14.26       | QP       |
| 12  | 18.7220      | 24.34                    | 10.39                   | 34.73                   | 50.00         | -15.27       | AVG      |

|               |                                                     |                   |         |
|---------------|-----------------------------------------------------|-------------------|---------|
| EUT           | HUAWEI MediaPad T2 7.0 (MediaPad T2 7.0 for short)  | Model Name        | BGO-L03 |
| Temperature   | 25°C                                                | Relative Humidity | 53%     |
| Test Voltage  | AC 120V/60Hz                                        | Phase             | Neutral |
| Test Mode     | Adapter+playing+Earphone                            |                   |         |
| Note          | Adapter:Huntkey+USB cable:Luxshare+Earphone:GoerTek |                   |         |
| Test Engineer | Lucky Mao                                           |                   |         |

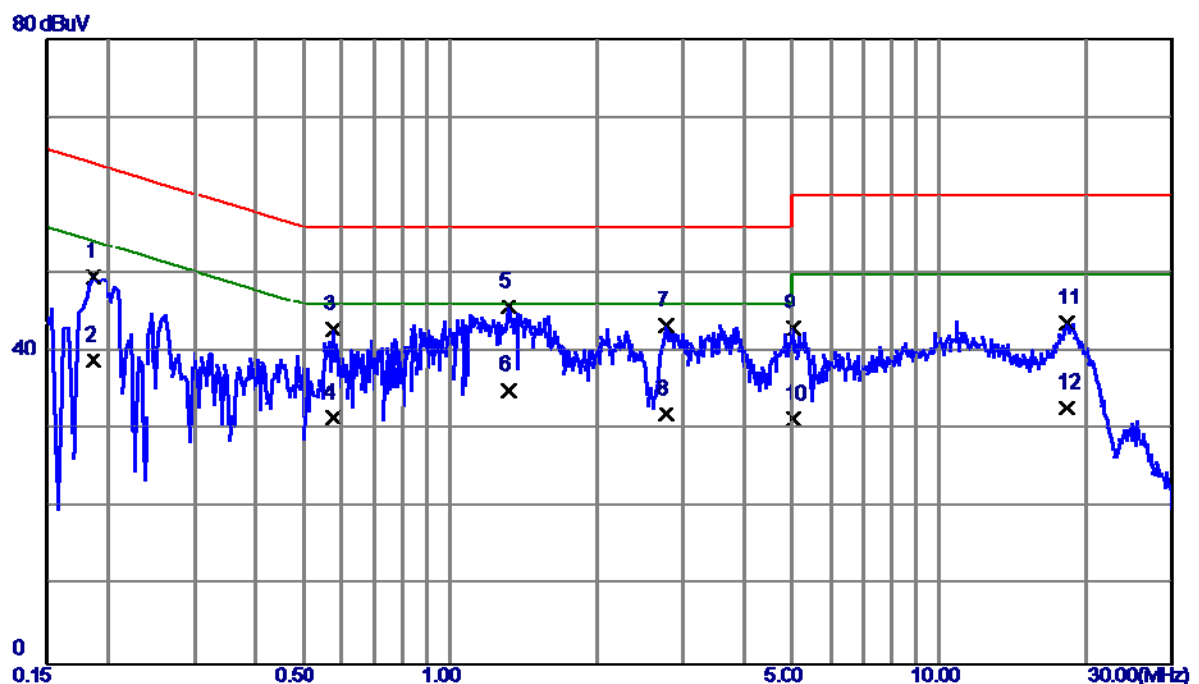


| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV | Limit<br>dBuV | Margin<br>dB | Detector |
|-----|--------------|--------------------------|-------------------------|-------------------------|---------------|--------------|----------|
| 1   | 0.1860       | 40.17                    | 9.48                    | 49.65                   | 64.21         | -14.56       | QP       |
| 2   | 0.1860       | 29.34                    | 9.48                    | 38.82                   | 54.21         | -15.39       | AVG      |
| 3   | 0.5780       | 33.45                    | 9.44                    | 42.89                   | 56.00         | -13.11       | QP       |
| 4   | 0.5780       | 22.14                    | 9.44                    | 31.58                   | 46.00         | -14.42       | AVG      |
| 5 * | 1.3180       | 36.12                    | 9.67                    | 45.79                   | 56.00         | -10.21       | QP       |
| 6   | 1.3180       | 25.34                    | 9.67                    | 35.01                   | 46.00         | -10.99       | AVG      |
| 7   | 2.7659       | 33.58                    | 9.79                    | 43.37                   | 56.00         | -12.63       | QP       |
| 8   | 2.7659       | 22.15                    | 9.79                    | 31.94                   | 46.00         | -14.06       | AVG      |
| 9   | 5.0420       | 32.99                    | 9.99                    | 42.98                   | 60.00         | -17.02       | QP       |
| 10  | 5.0420       | 21.38                    | 9.99                    | 31.37                   | 50.00         | -18.63       | AVG      |
| 11  | 18.2740      | 33.26                    | 10.45                   | 43.71                   | 60.00         | -16.29       | QP       |
| 12  | 18.2740      | 22.39                    | 10.45                   | 32.84                   | 50.00         | -17.16       | AVG      |

|               |                                                        |                   |         |
|---------------|--------------------------------------------------------|-------------------|---------|
| EUT           | HUAWEI MediaPad T2 7.0 (MediaPad T2 7.0 for short)     | Model Name        | BGO-L03 |
| Temperature   | 25°C                                                   | Relative Humidity | 53%     |
| Test Voltage  | AC 120V/60Hz                                           | Phase             | Line    |
| Test Mode     | Adapter+playing+Earphone                               |                   |         |
| Note          | Adapter:Huntkey+USB cable:Luxshare+Earphone:Lianchuang |                   |         |
| Test Engineer | Lucky Mao                                              |                   |         |

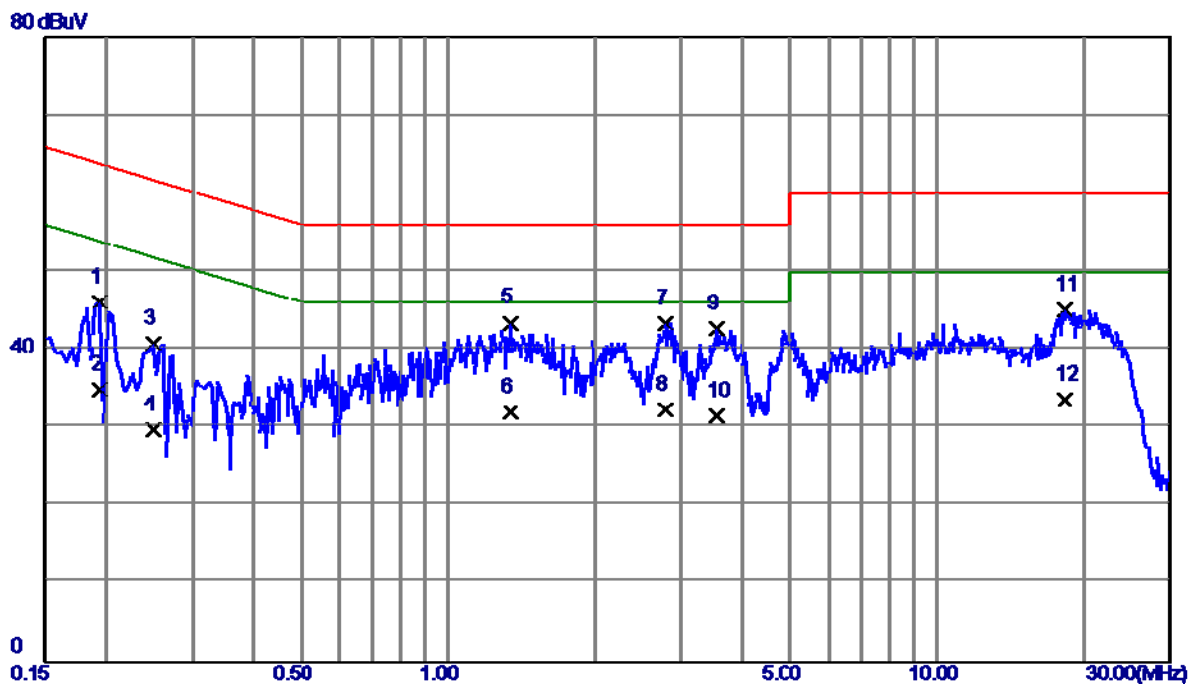


| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV | Limit<br>dBuV | Margin<br>dB | Detector |
|-----|--------------|--------------------------|-------------------------|-------------------------|---------------|--------------|----------|
| 1   | 0.1940       | 36.53                    | 9.53                    | 46.06                   | 63.86         | -17.80       | QP       |
| 2   | 0.1940       | 25.34                    | 9.53                    | 34.87                   | 53.86         | -18.99       | AVG      |
| 3   | 0.2500       | 31.26                    | 9.53                    | 40.79                   | 61.76         | -20.97       | QP       |
| 4   | 0.2500       | 20.25                    | 9.53                    | 29.78                   | 51.76         | -21.98       | AVG      |
| 5 * | 1.3380       | 33.62                    | 9.82                    | 43.44                   | 56.00         | -12.56       | QP       |
| 6   | 1.3380       | 22.14                    | 9.82                    | 31.96                   | 46.00         | -14.04       | AVG      |
| 7   | 2.7740       | 33.31                    | 10.09                   | 43.40                   | 56.00         | -12.60       | QP       |
| 8   | 2.7740       | 22.25                    | 10.09                   | 32.34                   | 46.00         | -13.66       | AVG      |
| 9   | 3.5300       | 32.57                    | 10.14                   | 42.71                   | 56.00         | -13.29       | QP       |
| 10  | 3.5300       | 21.38                    | 10.14                   | 31.52                   | 46.00         | -14.48       | AVG      |
| 11  | 18.3340      | 34.70                    | 10.39                   | 45.09                   | 60.00         | -14.91       | QP       |
| 12  | 18.3340      | 23.23                    | 10.39                   | 33.62                   | 50.00         | -16.38       | AVG      |

|               |                                                        |                   |         |
|---------------|--------------------------------------------------------|-------------------|---------|
| EUT           | HUAWEI MediaPad T2 7.0 (MediaPad T2 7.0 for short)     | Model Name        | BGO-L03 |
| Temperature   | 25°C                                                   | Relative Humidity | 53%     |
| Test Voltage  | AC 120V/60Hz                                           | Phase             | Neutral |
| Test Mode     | Adapter+playing+Earphone                               |                   |         |
| Note          | Adapter:Huntkey+USB cable:Luxshare+Earphone:Lianchuang |                   |         |
| Test Engineer | Lucky Mao                                              |                   |         |

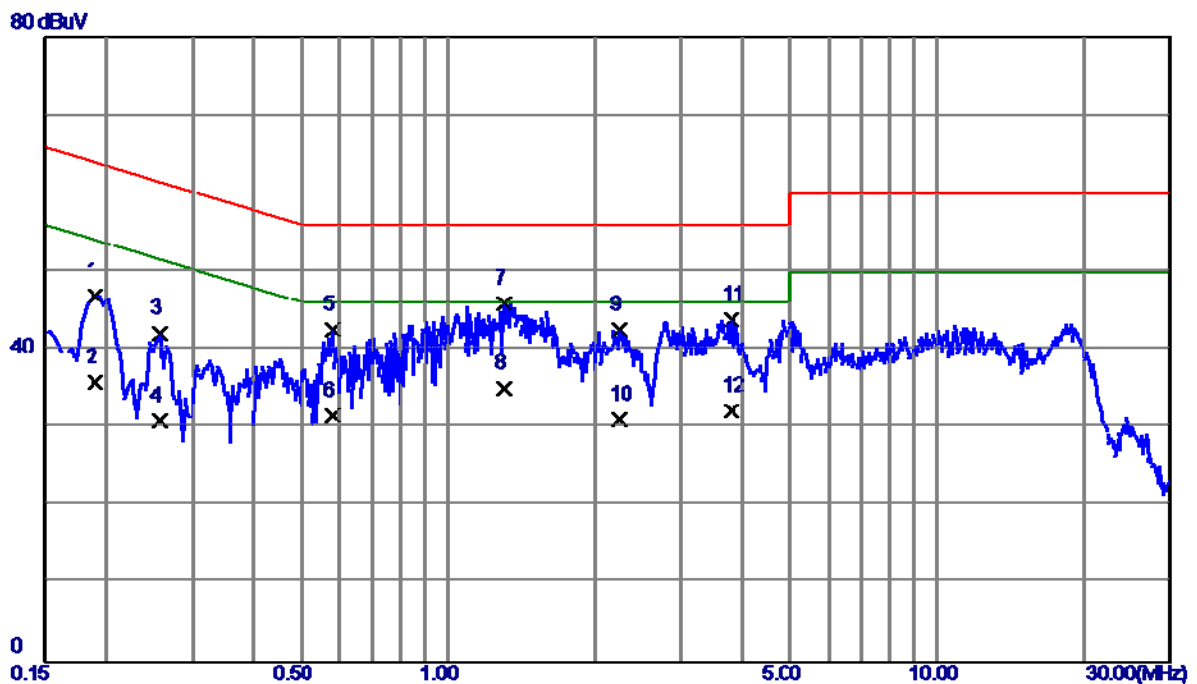


| No. | Freq.<br>MHz | Reading<br>Level<br>dBμV | Correct<br>Factor<br>dB | Measure<br>ment<br>dBμV | Limit<br>dBμV | Margin<br>dB | Detector |
|-----|--------------|--------------------------|-------------------------|-------------------------|---------------|--------------|----------|
| 1   | 0.1900       | 37.42                    | 9.49                    | 46.91                   | 64.04         | -17.13       | QP       |
| 2   | 0.1900       | 26.33                    | 9.49                    | 35.82                   | 54.04         | -18.22       | AVG      |
| 3   | 0.2580       | 32.57                    | 9.53                    | 42.10                   | 61.50         | -19.40       | QP       |
| 4   | 0.2580       | 21.34                    | 9.53                    | 30.87                   | 51.50         | -20.63       | AVG      |
| 5   | 0.5820       | 33.16                    | 9.44                    | 42.60                   | 56.00         | -13.40       | QP       |
| 6   | 0.5820       | 22.15                    | 9.44                    | 31.59                   | 46.00         | -14.41       | AVG      |
| 7 * | 1.3020       | 36.31                    | 9.67                    | 45.98                   | 56.00         | -10.02       | QP       |
| 8   | 1.3020       | 25.34                    | 9.67                    | 35.01                   | 46.00         | -10.99       | AVG      |
| 9   | 2.2340       | 32.78                    | 9.74                    | 42.52                   | 56.00         | -13.48       | QP       |
| 10  | 2.2340       | 21.25                    | 9.74                    | 30.99                   | 46.00         | -15.01       | AVG      |
| 11  | 3.8100       | 33.98                    | 9.87                    | 43.85                   | 56.00         | -12.15       | QP       |
| 12  | 3.8100       | 22.34                    | 9.87                    | 32.21                   | 46.00         | -13.79       | AVG      |

|               |                                                       |                   |         |
|---------------|-------------------------------------------------------|-------------------|---------|
| EUT           | HUAWEI MediaPad T2 7.0 (MediaPad T2 7.0 for short)    | Model Name        | BGO-L03 |
| Temperature   | 25°C                                                  | Relative Humidity | 53%     |
| Test Voltage  | AC 120V/60Hz                                          | Phase             | Line    |
| Test Mode     | Adapter+playing+Earphone                              |                   |         |
| Note          | Adapter:Huntkey+USB cable:Luxshare+Earphone:QUANCHENG |                   |         |
| Test Engineer | Lucky Mao                                             |                   |         |

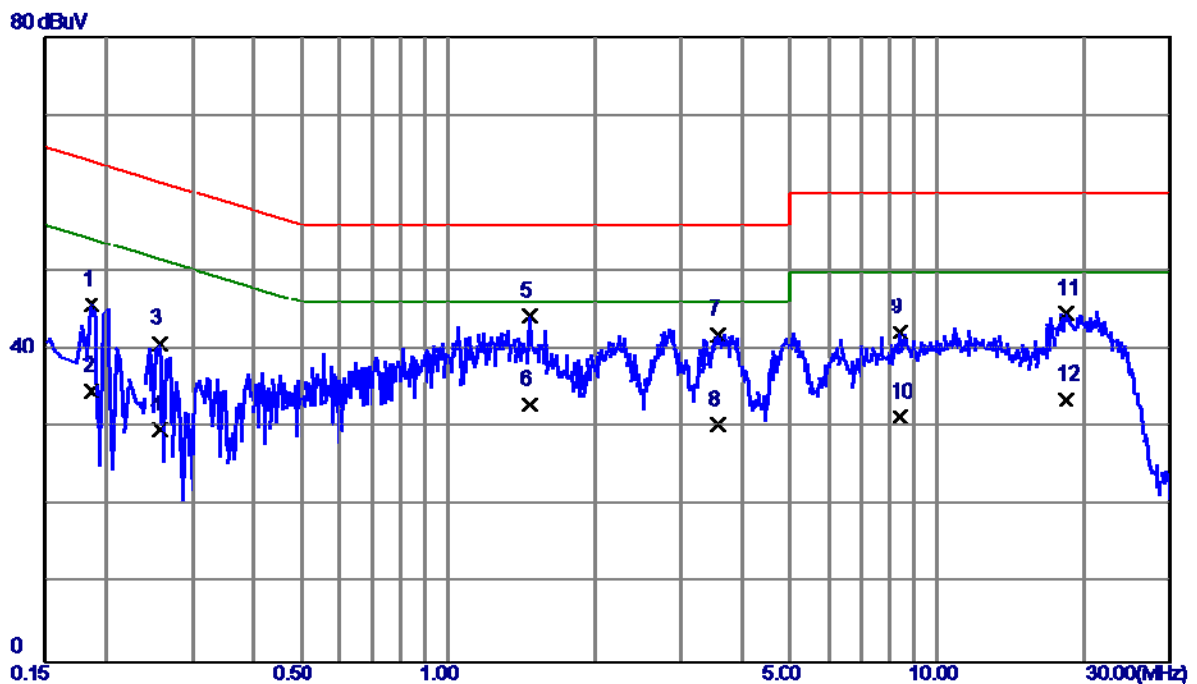

| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV | Limit<br>dBuV | Margin<br>dB | Detector |
|-----|--------------|--------------------------|-------------------------|-------------------------|---------------|--------------|----------|
| 1   | 0.1860       | 36.18                    | 9.53                    | 45.71                   | 64.21         | -18.50       | QP       |
| 2   | 0.1860       | 25.14                    | 9.53                    | 34.67                   | 54.21         | -19.54       | AVG      |
| 3   | 0.2580       | 31.32                    | 9.53                    | 40.85                   | 61.50         | -20.65       | QP       |
| 4   | 0.2580       | 20.23                    | 9.53                    | 29.76                   | 51.50         | -21.74       | AVG      |
| 5 * | 1.4740       | 34.39                    | 9.87                    | 44.26                   | 56.00         | -11.74       | QP       |
| 6   | 1.4740       | 23.13                    | 9.87                    | 33.00                   | 46.00         | -13.00       | AVG      |
| 7   | 3.5660       | 31.84                    | 10.15                   | 41.99                   | 56.00         | -14.01       | QP       |
| 8   | 3.5660       | 20.25                    | 10.15                   | 30.40                   | 46.00         | -15.60       | AVG      |
| 9   | 8.4060       | 32.04                    | 10.19                   | 42.23                   | 60.00         | -17.77       | QP       |
| 10  | 8.4060       | 21.23                    | 10.19                   | 31.42                   | 50.00         | -18.58       | AVG      |
| 11  | 18.4380      | 34.18                    | 10.39                   | 44.57                   | 60.00         | -15.43       | QP       |
| 12  | 18.4380      | 23.23                    | 10.39                   | 33.62                   | 50.00         | -16.38       | AVG      |


|               |                                                       |                   |         |
|---------------|-------------------------------------------------------|-------------------|---------|
| EUT           | HUAWEI MediaPad T2 7.0 (MediaPad T2 7.0 for short)    | Model Name        | BGO-L03 |
| Temperature   | 25°C                                                  | Relative Humidity | 53%     |
| Test Voltage  | AC 120V/60Hz                                          | Phase             | Neutral |
| Test Mode     | Adapter+playing+Earphone                              |                   |         |
| Note          | Adapter:Huntkey+USB cable:Luxshare+Earphone:QUANCHENG |                   |         |
| Test Engineer | Lucky Mao                                             |                   |         |

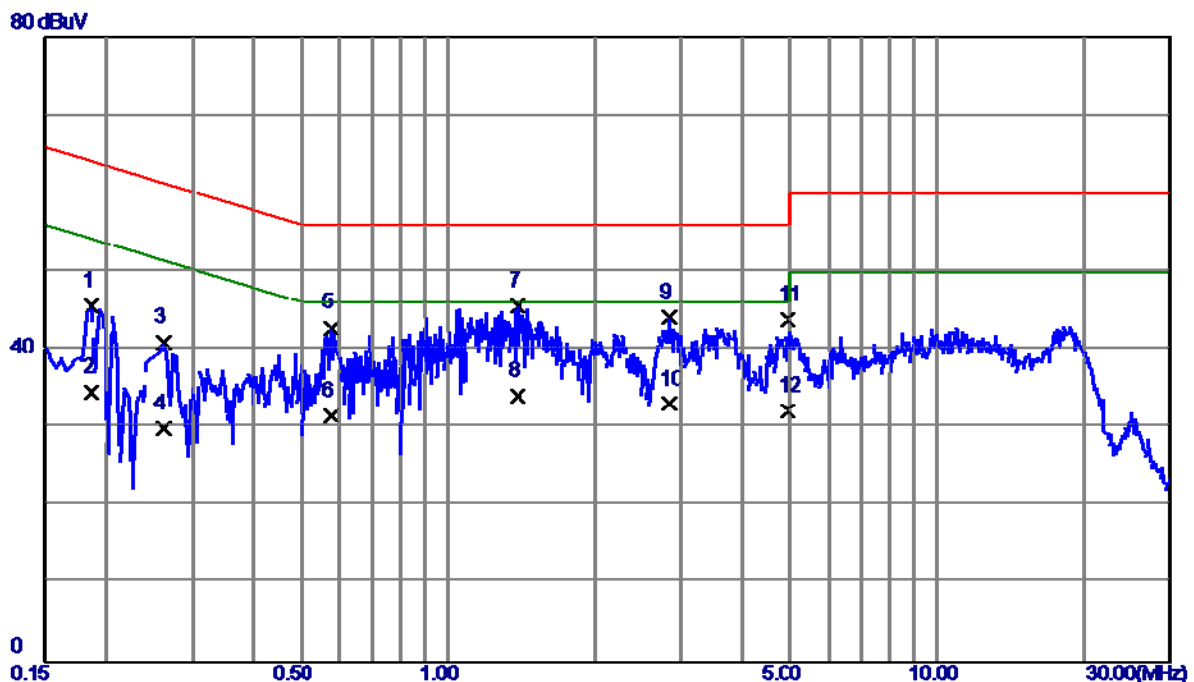

| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV | Limit<br>dBuV | Margin<br>dB | Detector |
|-----|--------------|--------------------------|-------------------------|-------------------------|---------------|--------------|----------|
| 1   | 0.1860       | 36.10                    | 9.48                    | 45.58                   | 64.21         | -18.63       | QP       |
| 2   | 0.1860       | 25.14                    | 9.48                    | 34.62                   | 54.21         | -19.59       | AVG      |
| 3   | 0.2620       | 31.46                    | 9.53                    | 40.99                   | 61.37         | -20.38       | QP       |
| 4   | 0.2620       | 20.34                    | 9.53                    | 29.87                   | 51.37         | -21.50       | AVG      |
| 5   | 0.5780       | 33.36                    | 9.44                    | 42.80                   | 56.00         | -13.20       | QP       |
| 6   | 0.5780       | 22.14                    | 9.44                    | 31.58                   | 46.00         | -14.42       | AVG      |
| 7 * | 1.3860       | 35.99                    | 9.67                    | 45.66                   | 56.00         | -10.34       | QP       |
| 8   | 1.3860       | 24.35                    | 9.67                    | 34.02                   | 46.00         | -11.98       | AVG      |
| 9   | 2.8300       | 34.32                    | 9.79                    | 44.11                   | 56.00         | -11.89       | QP       |
| 10  | 2.8300       | 23.25                    | 9.79                    | 33.04                   | 46.00         | -12.96       | AVG      |
| 11  | 4.9500       | 33.90                    | 9.98                    | 43.88                   | 56.00         | -12.12       | QP       |
| 12  | 4.9500       | 22.14                    | 9.98                    | 32.12                   | 46.00         | -13.88       | AVG      |


|               |                                                    |                   |         |
|---------------|----------------------------------------------------|-------------------|---------|
| EUT           | HUAWEI MediaPad T2 7.0 (MediaPad T2 7.0 for short) | Model Name        | BGO-L03 |
| Temperature   | 25°C                                               | Relative Humidity | 53%     |
| Test Voltage  | AC 120V/60Hz                                       | Phase             | Neutral |
| Test Mode     | Adapter+Traffic(GSM)                               |                   |         |
| Note          | Adapter:Huntkey+USB cable:Luxshare                 |                   |         |
| Test Engineer | Lucky Mao                                          |                   |         |

80 dBuV

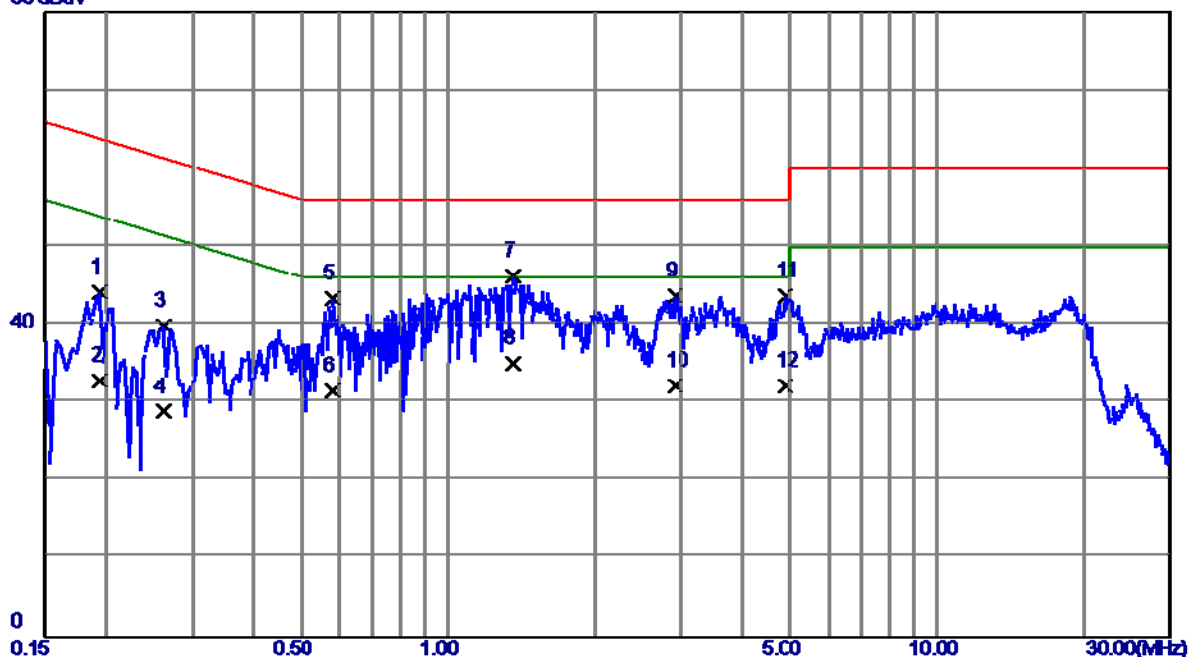


| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV | Limit<br>dBuV | Margin<br>dB | Detector |
|-----|--------------|--------------------------|-------------------------|-------------------------|---------------|--------------|----------|
| 1   | 0.1940       | 34.58                    | 9.51                    | 44.09                   | 63.86         | -19.77       | QP       |
| 2   | 0.1940       | 23.25                    | 9.51                    | 32.76                   | 53.86         | -21.10       | AVG      |
| 3   | 0.2620       | 30.26                    | 9.53                    | 39.79                   | 61.37         | -21.58       | QP       |
| 4   | 0.2620       | 19.35                    | 9.53                    | 28.88                   | 51.37         | -22.49       | AVG      |
| 5   | 0.5820       | 33.85                    | 9.44                    | 43.29                   | 56.00         | -12.71       | QP       |
| 6   | 0.5820       | 22.14                    | 9.44                    | 31.58                   | 46.00         | -14.42       | AVG      |
| 7 * | 1.3580       | 36.53                    | 9.67                    | 46.20                   | 56.00         | -9.80        | QP       |
| 8   | 1.3580       | 25.34                    | 9.67                    | 35.01                   | 46.00         | -10.99       | AVG      |
| 9   | 2.9219       | 33.86                    | 9.79                    | 43.65                   | 56.00         | -12.35       | QP       |
| 10  | 2.9219       | 22.34                    | 9.79                    | 32.13                   | 46.00         | -13.87       | AVG      |
| 11  | 4.8820       | 33.68                    | 9.98                    | 43.66                   | 56.00         | -12.34       | QP       |
| 12  | 4.8820       | 22.12                    | 9.98                    | 32.10                   | 46.00         | -13.90       | AVG      |

|               |                                                    |                   |         |
|---------------|----------------------------------------------------|-------------------|---------|
| EUT           | HUAWEI MediaPad T2 7.0 (MediaPad T2 7.0 for short) | Model Name        | BGO-L03 |
| Temperature   | 25°C                                               | Relative Humidity | 53%     |
| Test Voltage  | AC 120V/60Hz                                       | Phase             | Neutral |
| Test Mode     | Adapter+Traffic(GSM)                               |                   |         |
| Note          | Adapter:Huntkey+USB cable:Luxshare                 |                   |         |
| Test Engineer | Lucky Mao                                          |                   |         |

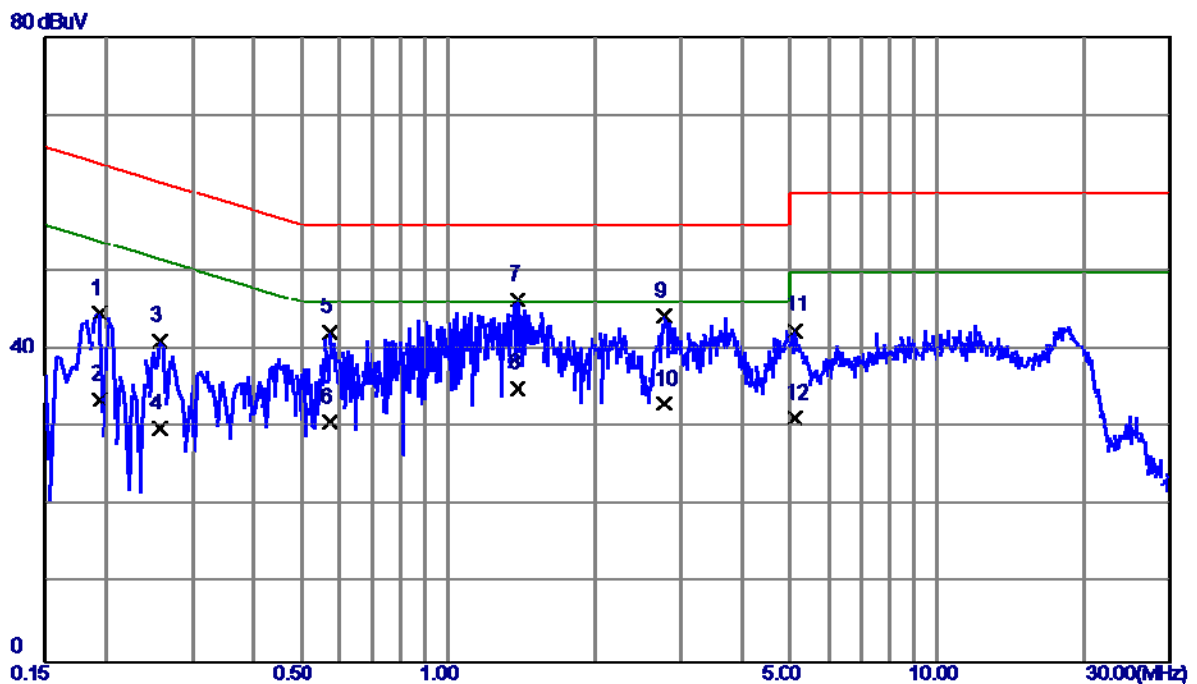

| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV | Limit<br>dBuV | Margin<br>dB | Detector |
|-----|--------------|--------------------------|-------------------------|-------------------------|---------------|--------------|----------|
| 1   | 0.1940       | 35.17                    | 9.51                    | 44.68                   | 63.86         | -19.18       | QP       |
| 2   | 0.1940       | 24.15                    | 9.51                    | 33.66                   | 53.86         | -20.20       | AVG      |
| 3   | 0.2580       | 31.62                    | 9.53                    | 41.15                   | 61.50         | -20.35       | QP       |
| 4   | 0.2580       | 20.34                    | 9.53                    | 29.87                   | 51.50         | -21.63       | AVG      |
| 5   | 0.5740       | 32.86                    | 9.44                    | 42.30                   | 56.00         | -13.70       | QP       |
| 6   | 0.5740       | 21.25                    | 9.44                    | 30.69                   | 46.00         | -15.31       | AVG      |
| 7 * | 1.3860       | 36.70                    | 9.67                    | 46.37                   | 56.00         | -9.63        | QP       |
| 8   | 1.3860       | 25.34                    | 9.67                    | 35.01                   | 46.00         | -10.99       | AVG      |
| 9   | 2.7659       | 34.54                    | 9.79                    | 44.33                   | 56.00         | -11.67       | QP       |
| 10  | 2.7659       | 23.25                    | 9.79                    | 33.04                   | 46.00         | -12.96       | AVG      |
| 11  | 5.1380       | 32.49                    | 9.99                    | 42.48                   | 60.00         | -17.52       | QP       |
| 12  | 5.1380       | 21.22                    | 9.99                    | 31.21                   | 50.00         | -18.79       | AVG      |


|               |                                                    |                   |         |
|---------------|----------------------------------------------------|-------------------|---------|
| EUT           | HUAWEI MediaPad T2 7.0 (MediaPad T2 7.0 for short) | Model Name        | BGO-L03 |
| Temperature   | 25°C                                               | Relative Humidity | 53%     |
| Test Voltage  | AC 120V/60Hz                                       | Phase             | Line    |
| Test Mode     | Adapter+Traffic(WCDMA)                             |                   |         |
| Note          | Adapter:Huntkey+USB cable:Luxshare                 |                   |         |
| Test Engineer | Lucky Mao                                          |                   |         |

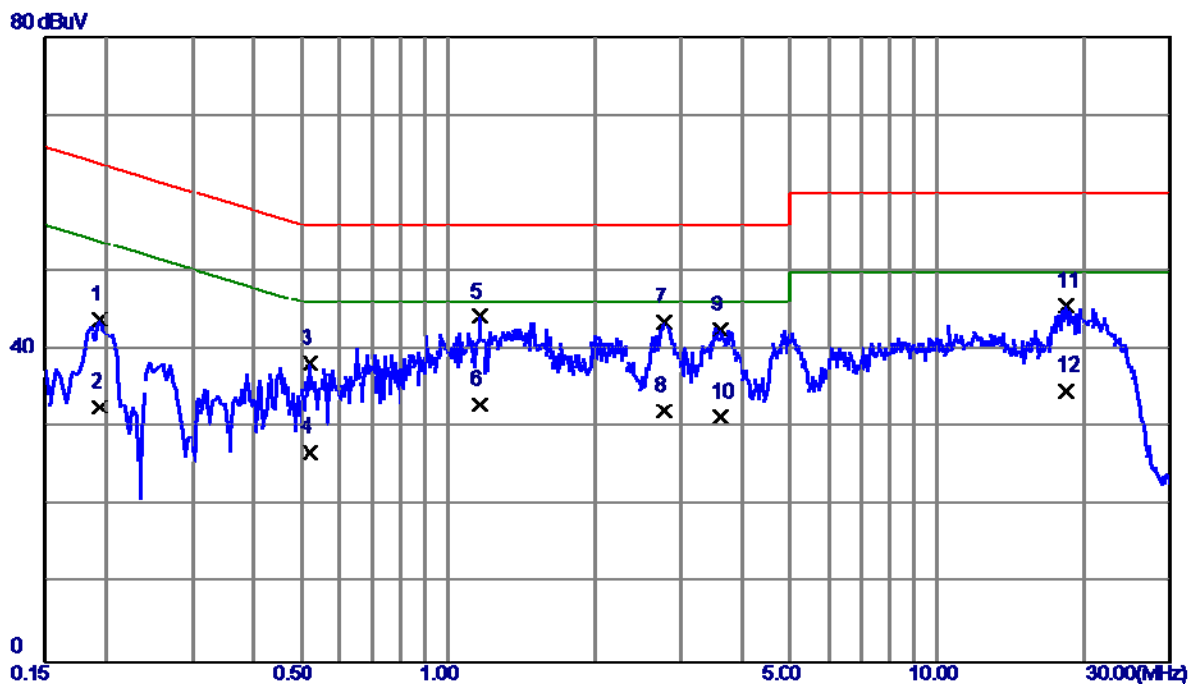

| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV | Limit<br>dBuV | Margin<br>dB | Detector |
|-----|--------------|--------------------------|-------------------------|-------------------------|---------------|--------------|----------|
| 1   | 0.1940       | 34.38                    | 9.53                    | 43.91                   | 63.86         | -19.95       | QP       |
| 2   | 0.1940       | 23.14                    | 9.53                    | 32.67                   | 53.86         | -21.19       | AVG      |
| 3   | 0.5220       | 28.64                    | 9.64                    | 38.28                   | 56.00         | -17.72       | QP       |
| 4   | 0.5220       | 17.25                    | 9.64                    | 26.89                   | 46.00         | -19.11       | AVG      |
| 5 * | 1.1620       | 34.48                    | 9.76                    | 44.24                   | 56.00         | -11.76       | QP       |
| 6   | 1.1620       | 23.25                    | 9.76                    | 33.01                   | 46.00         | -12.99       | AVG      |
| 7   | 2.7659       | 33.38                    | 10.09                   | 43.47                   | 56.00         | -12.53       | QP       |
| 8   | 2.7659       | 22.14                    | 10.09                   | 32.23                   | 46.00         | -13.77       | AVG      |
| 9   | 3.6060       | 32.37                    | 10.15                   | 42.52                   | 56.00         | -13.48       | QP       |
| 10  | 3.6060       | 21.23                    | 10.15                   | 31.38                   | 46.00         | -14.62       | AVG      |
| 11  | 18.4180      | 35.22                    | 10.39                   | 45.61                   | 60.00         | -14.39       | QP       |
| 12  | 18.4180      | 24.34                    | 10.39                   | 34.73                   | 50.00         | -15.27       | AVG      |


|               |                                                    |                   |         |
|---------------|----------------------------------------------------|-------------------|---------|
| EUT           | HUAWEI MediaPad T2 7.0 (MediaPad T2 7.0 for short) | Model Name        | BGO-L03 |
| Temperature   | 25°C                                               | Relative Humidity | 53%     |
| Test Voltage  | AC 120V/60Hz                                       | Phase             | Neutral |
| Test Mode     | Adapter+Traffic(WCDMA)                             |                   |         |
| Note          | Adapter:Huntkey+USB cable:Luxshare                 |                   |         |
| Test Engineer | Lucky Mao                                          |                   |         |

80 dBuV

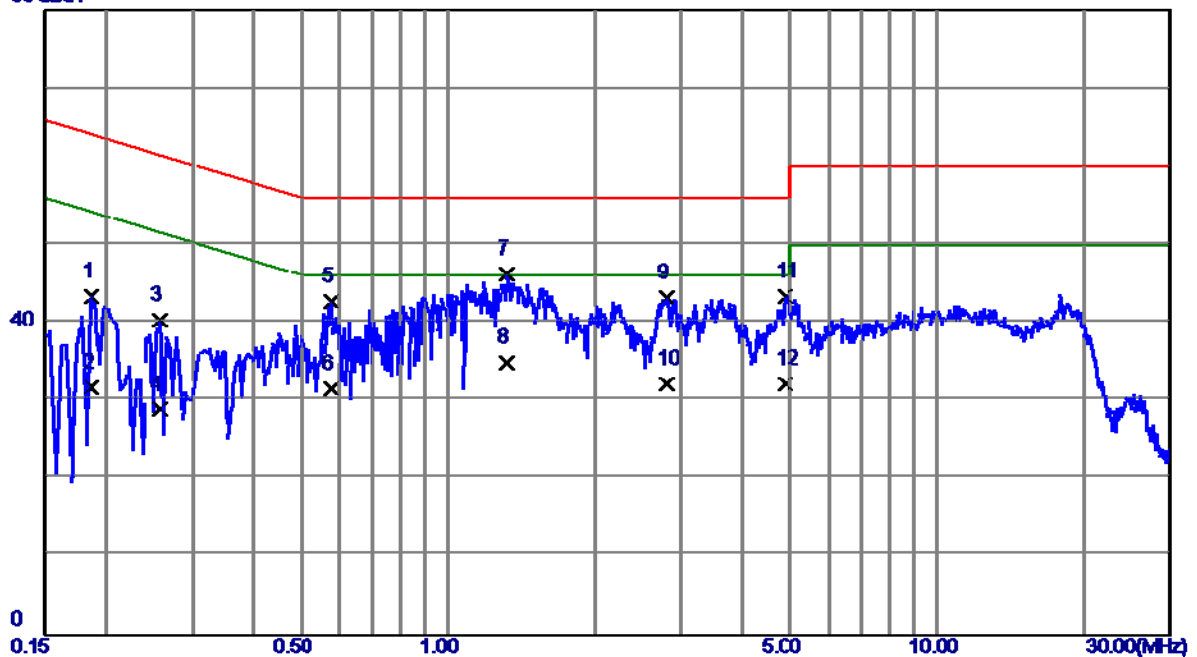

| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV | Limit<br>dBuV | Margin<br>dB | Detector |
|-----|--------------|--------------------------|-------------------------|-------------------------|---------------|--------------|----------|
| 1   | 0.1860       | 33.89                    | 9.48                    | 43.37                   | 64.21         | -20.84       | QP       |
| 2   | 0.1860       | 22.14                    | 9.48                    | 31.62                   | 54.21         | -22.59       | AVG      |
| 3   | 0.2580       | 30.73                    | 9.53                    | 40.26                   | 61.50         | -21.24       | QP       |
| 4   | 0.2580       | 19.35                    | 9.53                    | 28.88                   | 51.50         | -22.62       | AVG      |
| 5   | 0.5780       | 33.21                    | 9.44                    | 42.65                   | 56.00         | -13.35       | QP       |
| 6   | 0.5780       | 22.14                    | 9.44                    | 31.58                   | 46.00         | -14.42       | AVG      |
| 7 * | 1.3180       | 36.57                    | 9.67                    | 46.24                   | 56.00         | -9.76        | QP       |
| 8   | 1.3180       | 25.23                    | 9.67                    | 34.90                   | 46.00         | -11.10       | AVG      |
| 9   | 2.7940       | 33.47                    | 9.79                    | 43.26                   | 56.00         | -12.74       | QP       |
| 10  | 2.7940       | 22.34                    | 9.79                    | 32.13                   | 46.00         | -13.87       | AVG      |
| 11  | 4.8820       | 33.40                    | 9.98                    | 43.38                   | 56.00         | -12.62       | QP       |
| 12  | 4.8820       | 22.23                    | 9.98                    | 32.21                   | 46.00         | -13.79       | AVG      |


|               |                                                    |                   |         |
|---------------|----------------------------------------------------|-------------------|---------|
| EUT           | HUAWEI MediaPad T2 7.0 (MediaPad T2 7.0 for short) | Model Name        | BGO-L03 |
| Temperature   | 25°C                                               | Relative Humidity | 53%     |
| Test Voltage  | AC 120V/60Hz                                       | Phase             | Line    |
| Test Mode     | Adapter+Traffic(LTE)                               |                   |         |
| Note          | Adapter:Huntkey+USB cable:Luxshare                 |                   |         |
| Test Engineer | Lucky Mao                                          |                   |         |

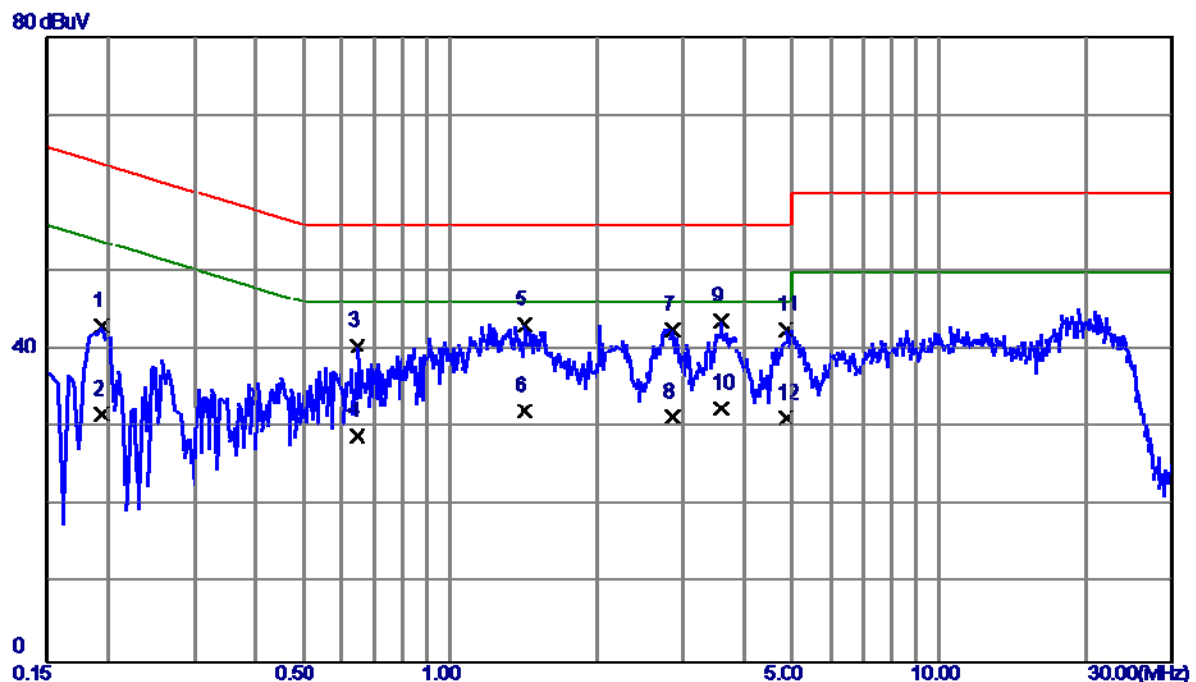

| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV | Limit<br>dBuV | Margin<br>dB | Detector |
|-----|--------------|--------------------------|-------------------------|-------------------------|---------------|--------------|----------|
| 1   | 0.1940       | 33.44                    | 9.53                    | 42.97                   | 63.86         | -20.89       | QP       |
| 2   | 0.1940       | 22.14                    | 9.53                    | 31.67                   | 53.86         | -22.19       | AVG      |
| 3   | 0.6460       | 30.90                    | 9.64                    | 40.54                   | 56.00         | -15.46       | QP       |
| 4   | 0.6460       | 19.25                    | 9.64                    | 28.89                   | 46.00         | -17.11       | AVG      |
| 5   | 1.4220       | 33.34                    | 9.85                    | 43.19                   | 56.00         | -12.81       | QP       |
| 6   | 1.4220       | 22.33                    | 9.85                    | 32.18                   | 46.00         | -13.82       | AVG      |
| 7   | 2.8460       | 32.51                    | 10.09                   | 42.60                   | 56.00         | -13.40       | QP       |
| 8   | 2.8460       | 21.25                    | 10.09                   | 31.34                   | 46.00         | -14.66       | AVG      |
| 9 * | 3.5780       | 33.49                    | 10.15                   | 43.64                   | 56.00         | -12.36       | QP       |
| 10  | 3.5780       | 22.34                    | 10.15                   | 32.49                   | 46.00         | -13.51       | AVG      |
| 11  | 4.8740       | 32.52                    | 10.02                   | 42.54                   | 56.00         | -13.46       | QP       |
| 12  | 4.8740       | 21.23                    | 10.02                   | 31.25                   | 46.00         | -14.75       | AVG      |

|               |                                                    |                   |         |
|---------------|----------------------------------------------------|-------------------|---------|
| EUT           | HUAWEI MediaPad T2 7.0 (MediaPad T2 7.0 for short) | Model Name        | BGO-L03 |
| Temperature   | 25°C                                               | Relative Humidity | 53%     |
| Test Voltage  | AC 120V/60Hz                                       | Phase             | Neutral |
| Test Mode     | Adapter+Traffic(LTE)                               |                   |         |
| Note          | Adapter:Huntkey+USB cable:Luxshare                 |                   |         |
| Test Engineer | Lucky Mao                                          |                   |         |

80 dBuV

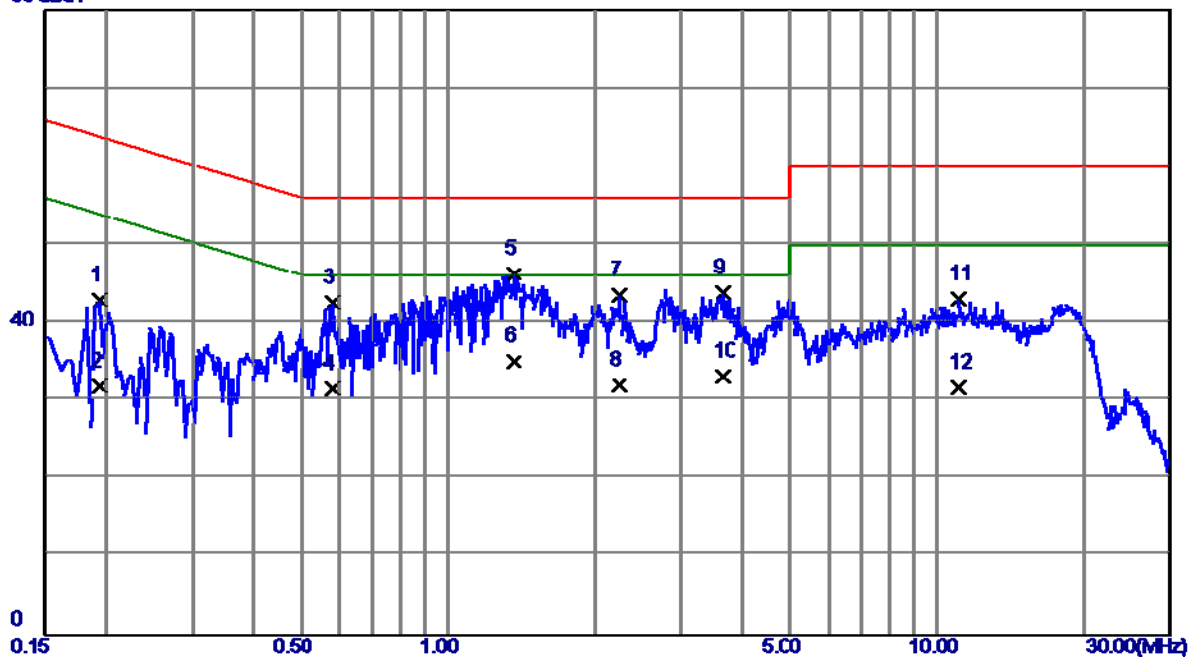

| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV | Limit<br>dBuV | Margin<br>dB | Detector |
|-----|--------------|--------------------------|-------------------------|-------------------------|---------------|--------------|----------|
| 1   | 0.1940       | 33.31                    | 9.51                    | 42.82                   | 63.86         | -21.04       | QP       |
| 2   | 0.1940       | 22.32                    | 9.51                    | 31.83                   | 53.86         | -22.03       | AVG      |
| 3   | 0.5820       | 33.15                    | 9.44                    | 42.59                   | 56.00         | -13.41       | QP       |
| 4   | 0.5820       | 22.14                    | 9.44                    | 31.58                   | 46.00         | -14.42       | AVG      |
| 5 * | 1.3619       | 36.54                    | 9.67                    | 46.21                   | 56.00         | -9.79        | QP       |
| 6   | 1.3619       | 25.34                    | 9.67                    | 35.01                   | 46.00         | -10.99       | AVG      |
| 7   | 2.2340       | 33.78                    | 9.74                    | 43.52                   | 56.00         | -12.48       | QP       |
| 8   | 2.2340       | 22.25                    | 9.74                    | 31.99                   | 46.00         | -14.01       | AVG      |
| 9   | 3.6460       | 34.06                    | 9.85                    | 43.91                   | 56.00         | -12.09       | QP       |
| 10  | 3.6460       | 23.28                    | 9.85                    | 33.13                   | 46.00         | -12.87       | AVG      |
| 11  | 11.0860      | 32.67                    | 10.32                   | 42.99                   | 60.00         | -17.01       | QP       |
| 12  | 11.0860      | 21.34                    | 10.32                   | 31.66                   | 50.00         | -18.34       | AVG      |

## 4.2 RADIATED EMISSION MEASUREMENT

### 4.2.1 LIMITS OF RADIATED EMISSION MEASUREMENT

**Below 1 GHz**

**Measurement Method and Applied Limits:**

**ANSI C63.4:**

| Frequency (MHz) | Class A (at 10m)         |                            | Class B (at 3m)          |                            |
|-----------------|--------------------------|----------------------------|--------------------------|----------------------------|
|                 | (uV/m)<br>Field strength | (dBuV/m)<br>Field strength | (uV/m)<br>Field strength | (dBuV/m)<br>Field strength |
| 30 - 88         | 90                       | 39                         | 100                      | 40                         |
| 88 - 216        | 150                      | 43.5                       | 150                      | 43.5                       |
| 216 - 960       | 210                      | 46.4                       | 200                      | 46                         |
| Above 960       | 300                      | 49.5                       | 500                      | 54                         |

**Above 1 GHz**

**Measurement Method and Applied Limits:**

**ANSI C63.4:**

| Frequency (MHz) | Class A          |         |                   |         | Class B          |         |
|-----------------|------------------|---------|-------------------|---------|------------------|---------|
|                 | (dBuV/m) (at 3m) |         | (dBuV/m) (at 10m) |         | (dBuV/m) (at 3m) |         |
|                 | Peak             | Average | Peak              | Average | Peak             | Average |
| Above 1000      | 80               | 60      | 69.5              | 49.5    | 74               | 54      |

### FREQUENCY RANGE OF RADIATED MEASUREMENT (FOR UNINTENTIONAL RADIATORS)

| Highest frequency generated or Upper frequency of measurement used in the device or on which the device operates or tunes (MHz) | Range (MHz)                                                                     |
|---------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------|
| Below 1.705                                                                                                                     | 30                                                                              |
| 1.705 - 108                                                                                                                     | 1000                                                                            |
| 108 - 500                                                                                                                       | 2000                                                                            |
| 500 - 1000                                                                                                                      | 5000                                                                            |
| Above 1000                                                                                                                      | 5 <sup>th</sup> harmonic of the highest frequency or 40 GHz, whichever is lower |

**NOTE:**

- (1) The limit for radiated test was performed according to as following:  
FCC Part 15, Subpart B.
- (2) The tighter limit applies at the band edges.
- (3) Emission level (dBuV/m) = 20log Emission level (uV/m).  
3m Emission level = 10m Emission level + 20log(10m/3m).
- (4) The test result calculated as following:  
Measurement Value = Reading Level + Correct Factor  
Correct Factor = Antenna Factor + Cable Loss - Amplifier Gain(if use)  
Margin Level = Measurement Value - Limit Value

#### 4.2.2 MEASUREMENT INSTRUMENTS LIST

| Item | Kind of Equipment    | Manufacturer | Type No.                           | Serial No.  | Calibrated until |
|------|----------------------|--------------|------------------------------------|-------------|------------------|
| 1    | Antenna              | Schwarbeck   | VULB9160                           | 9160-3232   | Mar. 27, 2017    |
| 2    | Amplifier            | HP           | 8447D                              | 2944A09673  | Nov. 09, 2016    |
| 3    | Receiver             | AGILENT      | N9038A                             | MY52130039  | Oct. 11, 2016    |
| 4    | Test Cable           | emci         | LMR-400(30MHz-1GHz)                | C-01        | Jun. 27, 2017    |
| 5    | Control              | CT           | SC100                              | N/A         | N/A              |
| 6    | Position Control     | MF           | MF-7802                            | MF780208416 | N/A              |
| 7    | Antenna              | ETS          | 3115                               | 00075789    | Mar. 27, 2017    |
| 8    | Amplifier            | Agilent      | 8449B                              | 3008A02274  | Nov. 01, 2016    |
| 9    | Receiver             | AGILENT      | N9038A                             | MY52130039  | Oct. 11, 2016    |
| 10   | Test Cable           | emci         | EMC104-SM-SM-10000(1GHz – 26.5GHz) | C-68        | Jun. 27, 2017    |
| 11   | Measurement Software | Farad        | EZ-EMC Ver.NB-03A1-01              | N/A         | N/A              |

Remark: "N/A" denotes no model name, serial no. or calibration specified.  
All calibration period of equipment list is one year.

#### 4.2.3 TEST PROCEDURE


- a. The measuring distance of 3 m shall be used for measurements. The EUT was placed on the top of a rotating table 0.8 meter above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.(below 1GHz)
- b. The measuring distance of 3 m shall be used for measurements. The EUT was placed on the top of a rotating table 0.8 meter above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.(above 1GHz)
- c. The height of the equipment or of the substitution antenna shall be 0.8 m, the height of the test antenna shall vary between 1 m to 4 m. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights find the maximum reading (used Bore sight function).
- e. The receiver system was set to peak and average detect function and specified bandwidth with maximum hold mode when the test frequency is above 1GHz.
- f. The initial step in collecting radiated emission data is a receiver peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured.
- g. All readings are Peak unless otherwise stated QP in column of Note. Peak denotes that the Peak reading compliance with the QP Limits and then QP Mode measurement didn't perform. (below 1GHz)
- h. All readings are Peak Mode value unless otherwise stated AVG in column of Note. If the Peak Mode Measured value compliance with the Peak Limits and lower than AVG Limits, the EUT shall be deemed to meet both Peak & AVG Limits and then only Peak Mode was measured, but AVG Mode didn't perform. (above 1GHz)
- i. For the actual test configuration, please refer to the related Item - Block Diagram of system tested (please refer to 3.3).

#### 4.2.4 DEVIATION FROM TEST STANDARD


No deviation

#### 4.2.5 TEST SETUP

##### (A) Radiated Emission Test Set-Up Frequency Below 1 GHz

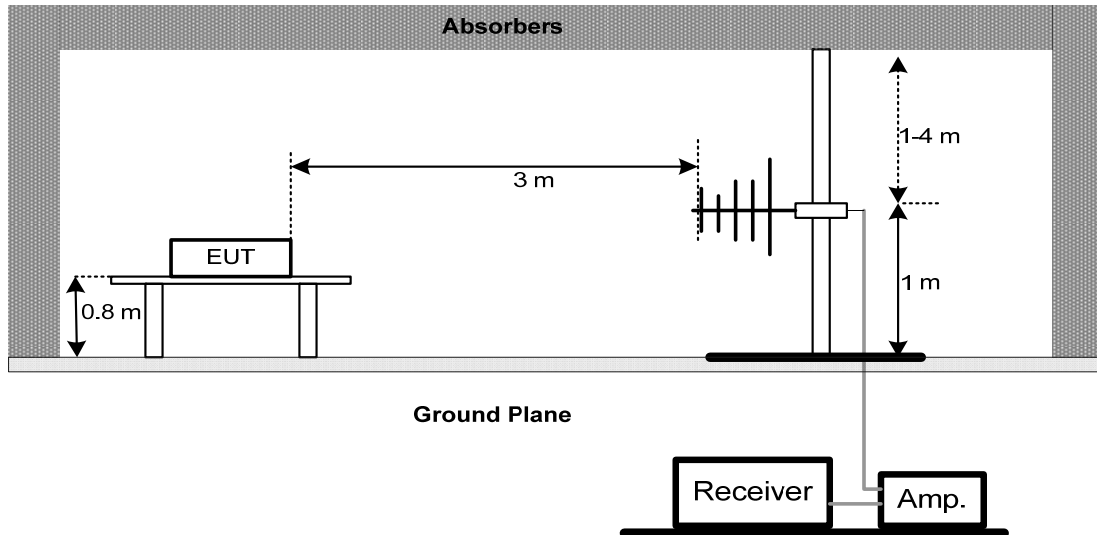

##### (B) Radiated Emission Test Set-Up Frequency 1 GHz

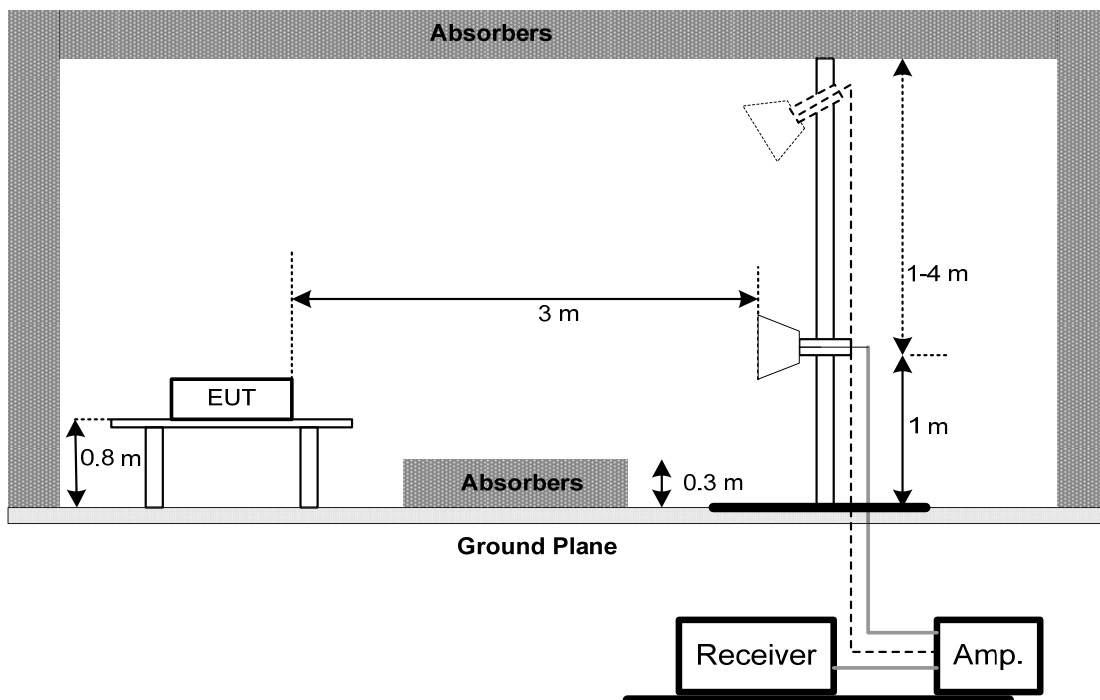

#### 4.2.6 EUT OPERATING CONDITIONS


The EUT tested system was configured as the statements of 4.1.6 unless otherwise a special operating condition is specified in the follows during the testing.

#### 4.2.7 TEST RESULTS-BELOW 1GHZ

Remark:


- (1) All readings are Peak unless otherwise stated QP in column of 『Note』 . Peak denotes that the Peak reading compliance with the QP Limits and then QP Mode measurement didn't perform.
- (2) Measuring frequency range from 30MHz to 1000MHz.
- (3) If the peak scan value lower limit more than 20dB, then this signal data does not show in table.

|               |                                                    |                   |          |
|---------------|----------------------------------------------------|-------------------|----------|
| EUT           | HUAWEI MediaPad T2 7.0 (MediaPad T2 7.0 for short) | Model Name        | BGO-L03  |
| Temperature   | 25°C                                               | Relative Humidity | 60%      |
| Test Voltage  | AC 120V/60Hz                                       | Polarization      | Vertical |
| Test Mode     | USB copy(EUT with PC)+idle                         |                   |          |
| Note          | USB Cable:FOXCONN                                  |                   |          |
| Test Engineer | Lucky Mao                                          |                   |          |

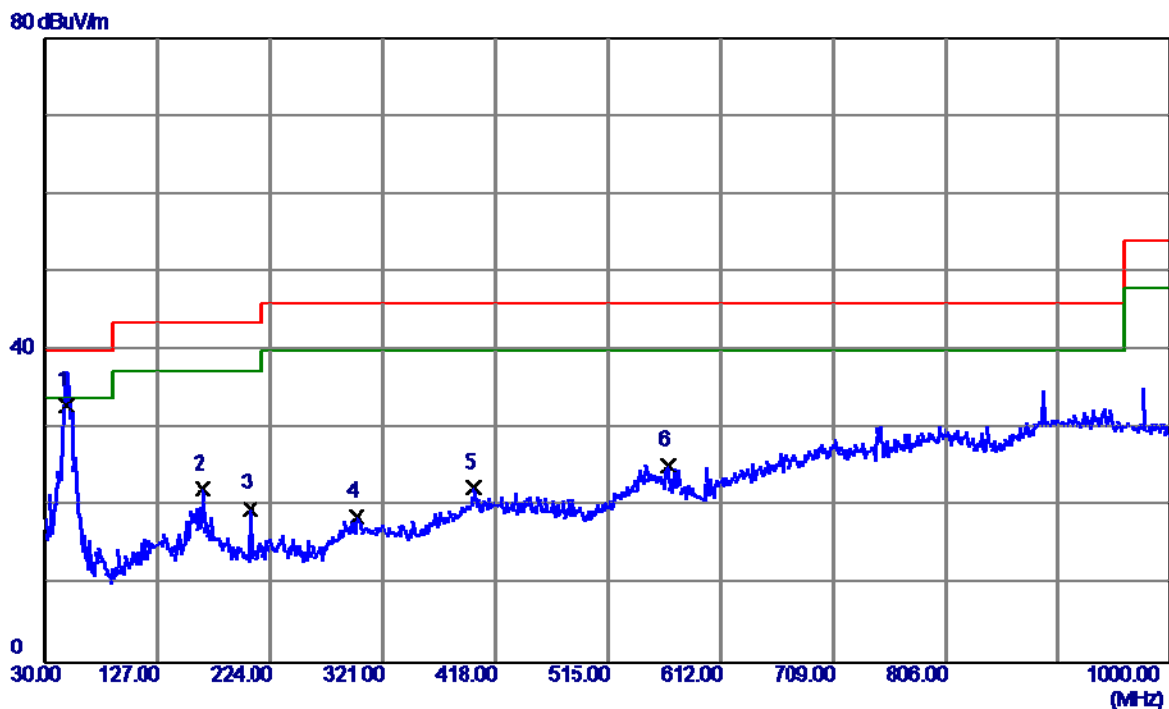


| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|
| 1 * | 48.4300      | 46.01                      | -13.11                  | 32.90                     | 40.00           | -7.10        | QP       |
| 2   | 165.8000     | 34.42                      | -12.20                  | 22.22                     | 43.50           | -21.28       | QP       |
| 3   | 206.5399     | 34.33                      | -14.57                  | 19.76                     | 43.50           | -23.74       | QP       |
| 4   | 298.6900     | 28.97                      | -10.30                  | 18.67                     | 46.00           | -27.33       | QP       |
| 5   | 399.5700     | 30.26                      | -7.81                   | 22.45                     | 46.00           | -23.55       | QP       |
| 6   | 566.4099     | 30.71                      | -5.37                   | 25.34                     | 46.00           | -20.66       | QP       |

|               |                                                    |                   |            |
|---------------|----------------------------------------------------|-------------------|------------|
| EUT           | HUAWEI MediaPad T2 7.0 (MediaPad T2 7.0 for short) | Model Name        | BGO-L03    |
| Temperature   | 25°C                                               | Relative Humidity | 60%        |
| Test Voltage  | AC 120V/60Hz                                       | Polarization      | Horizontal |
| Test Mode     | USB copy(EUT with PC)+idle                         |                   |            |
| Note          | USB Cable:FOXCONN                                  |                   |            |
| Test Engineer | Lucky Mao                                          |                   |            |

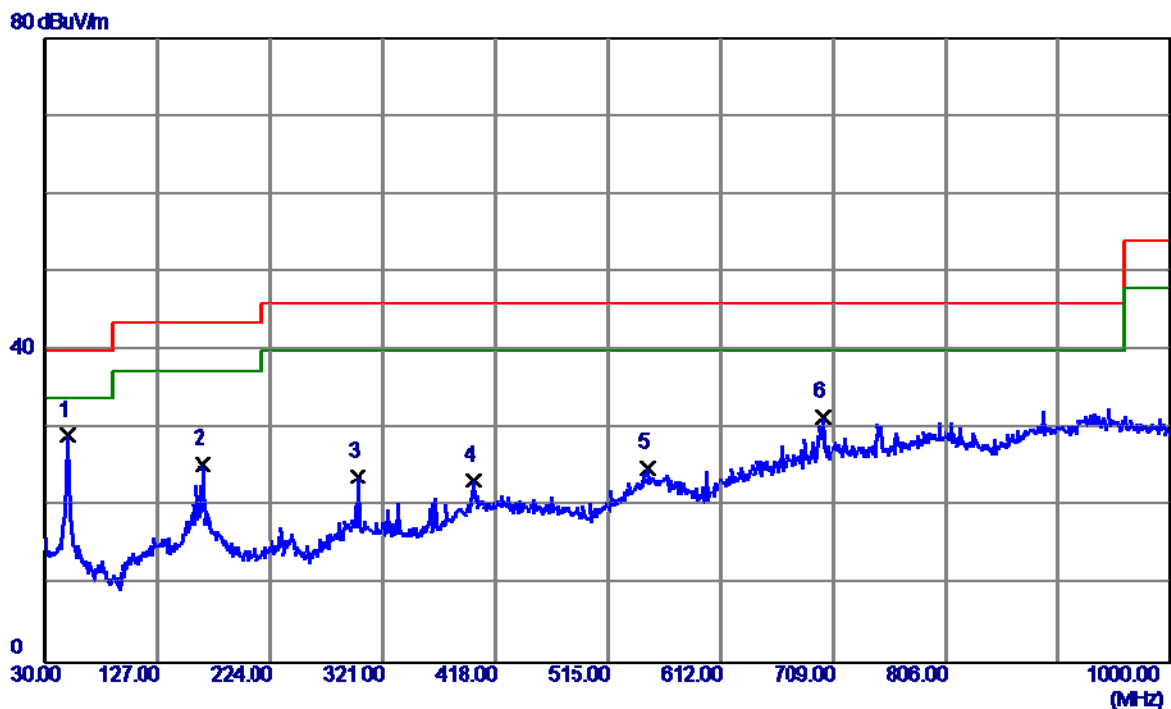


| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|
| 1 * | 49.4000      | 42.41                      | -13.30                  | 29.11                     | 40.00           | -10.89       | QP       |
| 2   | 165.8000     | 37.66                      | -12.20                  | 25.46                     | 43.50           | -18.04       | QP       |
| 3   | 299.6600     | 34.06                      | -10.20                  | 23.86                     | 46.00           | -22.14       | QP       |
| 4   | 399.5700     | 31.20                      | -7.81                   | 23.39                     | 46.00           | -22.61       | QP       |
| 5   | 549.9200     | 29.46                      | -4.55                   | 24.91                     | 46.00           | -21.09       | QP       |
| 6   | 700.2700     | 33.63                      | -2.10                   | 31.53                     | 46.00           | -14.47       | QP       |

|               |                                                    |                   |          |
|---------------|----------------------------------------------------|-------------------|----------|
| EUT           | HUAWEI MediaPad T2 7.0 (MediaPad T2 7.0 for short) | Model Name        | BGO-L03  |
| Temperature   | 25°C                                               | Relative Humidity | 60%      |
| Test Voltage  | AC 120V/60Hz                                       | Polarization      | Vertical |
| Test Mode     | USB copy(EUT with PC)+idle                         |                   |          |
| Note          | USB Cable:HONGLIN                                  |                   |          |
| Test Engineer | Lucky Mao                                          |                   |          |

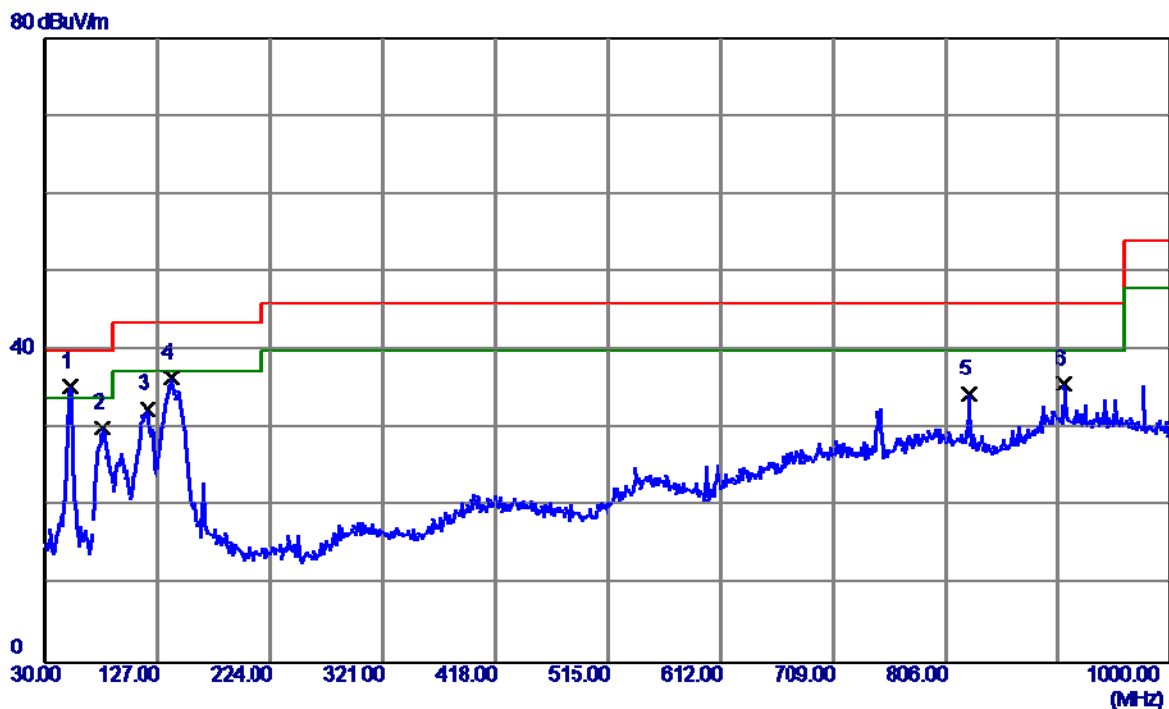


| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|
| 1 * | 51.3400      | 49.13                      | -13.73                  | 35.40                     | 40.00           | -4.60        | QP       |
| 2   | 79.4700      | 46.22                      | -16.10                  | 30.12                     | 40.00           | -9.88        | QP       |
| 3   | 118.2700     | 46.21                      | -13.66                  | 32.55                     | 43.50           | -10.95       | QP       |
| 4   | 138.6400     | 50.06                      | -13.56                  | 36.50                     | 43.50           | -7.00        | QP       |
| 5   | 826.3700     | 34.98                      | -0.54                   | 34.44                     | 46.00           | -11.56       | QP       |
| 6   | 908.8200     | 33.13                      | 2.60                    | 35.73                     | 46.00           | -10.27       | QP       |

|               |                                                    |                   |            |
|---------------|----------------------------------------------------|-------------------|------------|
| EUT           | HUAWEI MediaPad T2 7.0 (MediaPad T2 7.0 for short) | Model Name        | BGO-L03    |
| Temperature   | 25°C                                               | Relative Humidity | 60%        |
| Test Voltage  | AC 120V/60Hz                                       | Polarization      | Horizontal |
| Test Mode     | USB copy(EUT with PC)+idle                         |                   |            |
| Note          | USB Cable:HONGLIN                                  |                   |            |
| Test Engineer | Lucky Mao                                          |                   |            |

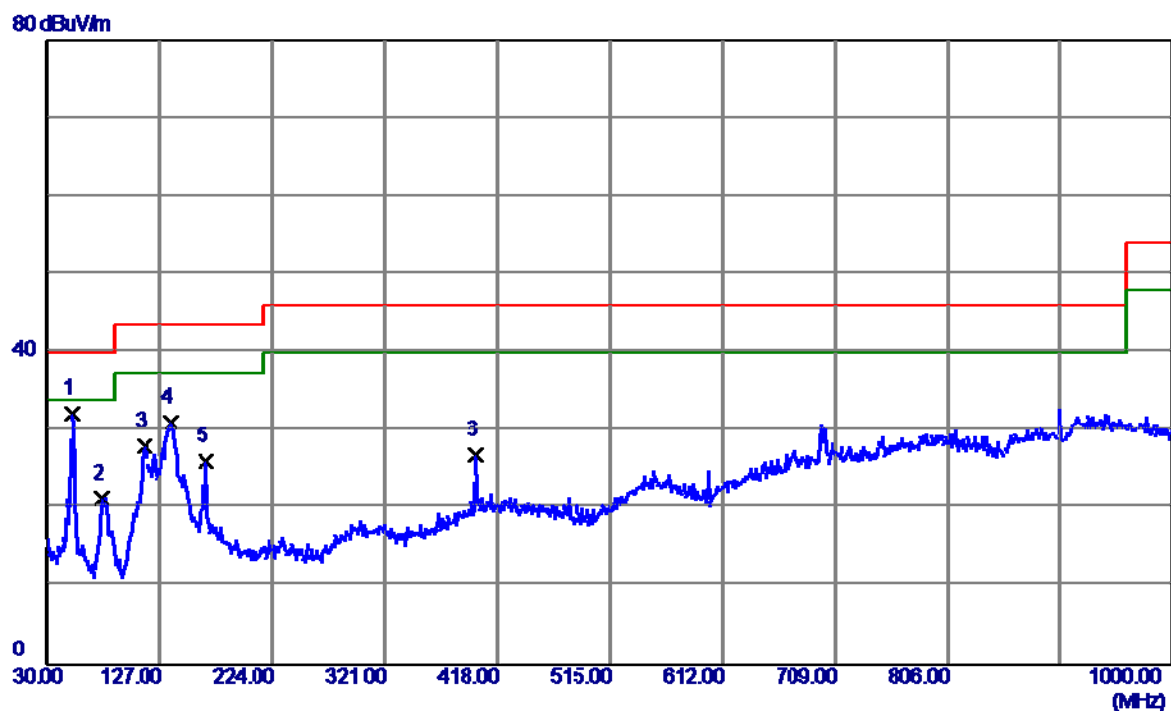


| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|
| 1 * | 51.3400      | 45.82                      | -13.73                  | 32.09                     | 40.00           | -7.91        | QP       |
| 2   | 77.5300      | 37.66                      | -16.31                  | 21.35                     | 40.00           | -18.65       | QP       |
| 3   | 114.3900     | 42.18                      | -14.13                  | 28.05                     | 43.50           | -15.45       | QP       |
| 4   | 136.7000     | 44.37                      | -13.29                  | 31.08                     | 43.50           | -12.42       | QP       |
| 5   | 166.7700     | 38.30                      | -12.21                  | 26.09                     | 43.50           | -17.41       | QP       |
| 6   | 399.5700     | 34.65                      | -7.81                   | 26.84                     | 46.00           | -19.16       | QP       |

|               |                                                    |                   |          |
|---------------|----------------------------------------------------|-------------------|----------|
| EUT           | HUAWEI MediaPad T2 7.0 (MediaPad T2 7.0 for short) | Model Name        | BGO-L03  |
| Temperature   | 25°C                                               | Relative Humidity | 60%      |
| Test Voltage  | AC 120V/60Hz                                       | Polarization      | Vertical |
| Test Mode     | USB copy(EUT with PC)+idle                         |                   |          |
| Note          | USB Cable:Luxshare                                 |                   |          |
| Test Engineer | Lucky Mao                                          |                   |          |

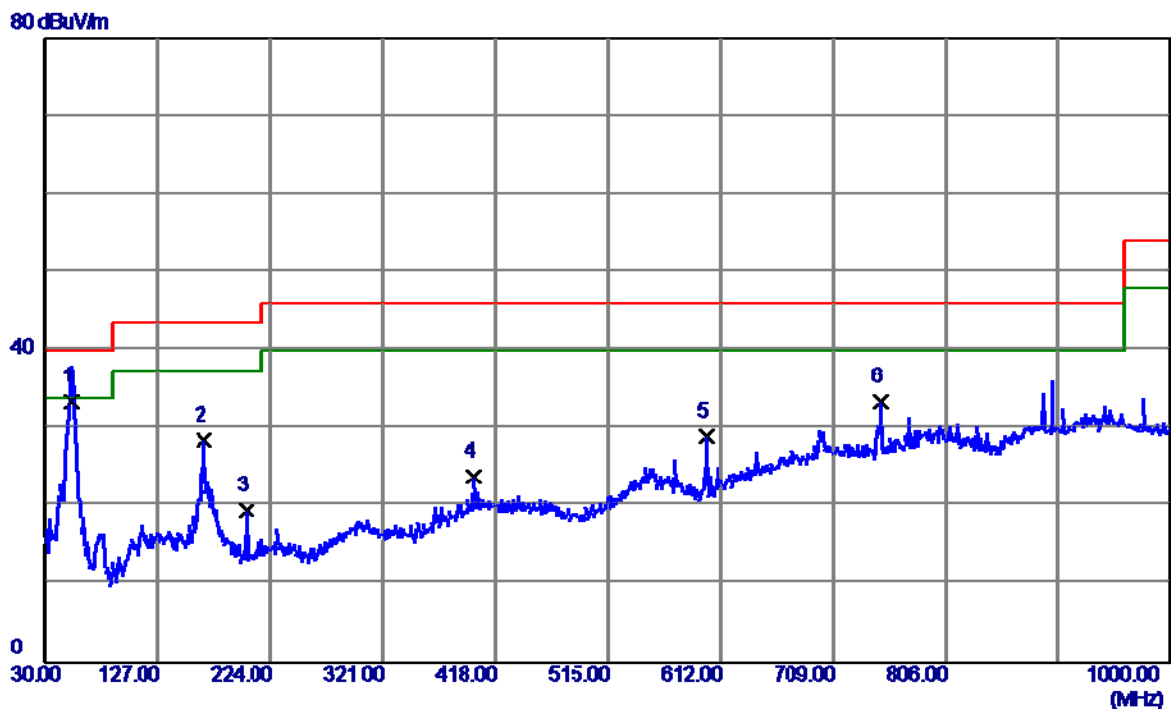


| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|
| 1 * | 52.3100      | 47.30                      | -13.84                  | 33.46                     | 40.00           | -6.54        | QP       |
| 2   | 166.7700     | 40.69                      | -12.21                  | 28.48                     | 43.50           | -15.02       | QP       |
| 3   | 203.6300     | 34.00                      | -14.51                  | 19.49                     | 43.50           | -24.01       | QP       |
| 4   | 399.5700     | 31.64                      | -7.81                   | 23.83                     | 46.00           | -22.17       | QP       |
| 5   | 600.3600     | 35.93                      | -7.04                   | 28.89                     | 46.00           | -17.11       | QP       |
| 6   | 749.7400     | 35.34                      | -1.97                   | 33.37                     | 46.00           | -12.63       | QP       |

|               |                                                    |                   |            |
|---------------|----------------------------------------------------|-------------------|------------|
| EUT           | HUAWEI MediaPad T2 7.0 (MediaPad T2 7.0 for short) | Model Name        | BGO-L03    |
| Temperature   | 25°C                                               | Relative Humidity | 60%        |
| Test Voltage  | AC 120V/60Hz                                       | Polarization      | Horizontal |
| Test Mode     | USB copy(EUT with PC)+idle                         |                   |            |
| Note          | USB Cable:Luxshare                                 |                   |            |
| Test Engineer | Lucky Mao                                          |                   |            |

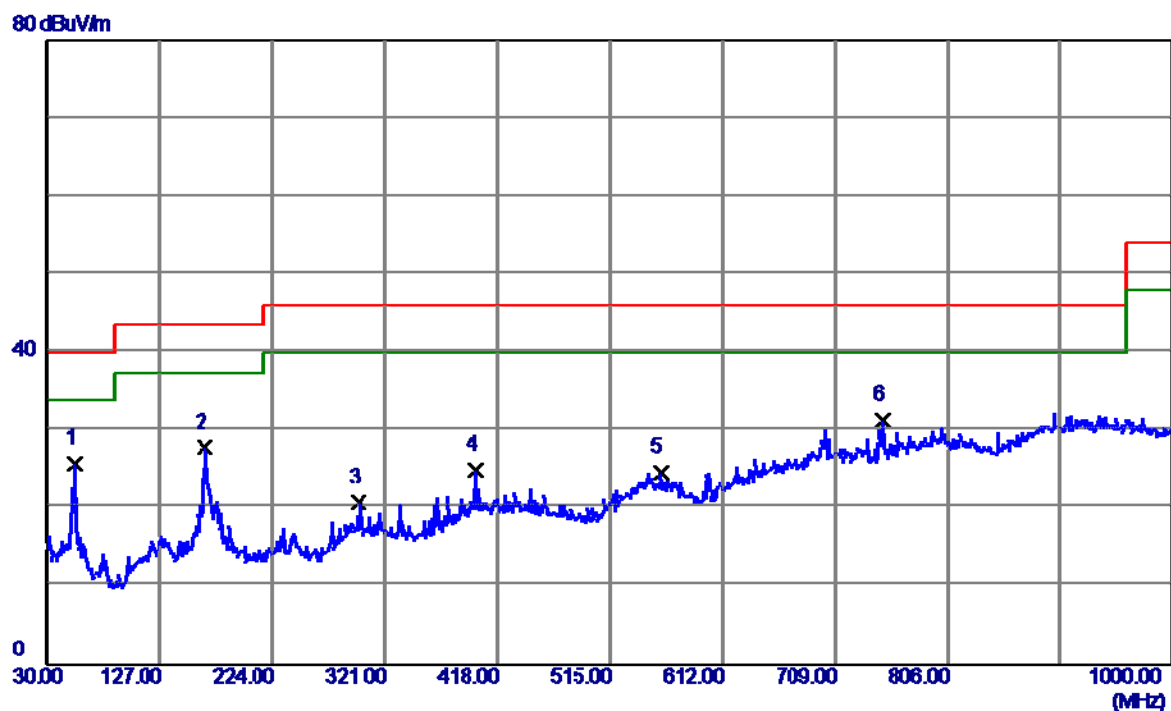


| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|
| 1 * | 53.2800      | 39.40                      | -13.69                  | 25.71                     | 40.00           | -14.29       | QP       |
| 2   | 165.8000     | 40.04                      | -12.20                  | 27.84                     | 43.50           | -15.66       | QP       |
| 3   | 298.6900     | 31.08                      | -10.30                  | 20.78                     | 46.00           | -25.22       | QP       |
| 4   | 399.5700     | 32.72                      | -7.81                   | 24.91                     | 46.00           | -21.09       | QP       |
| 5   | 558.6500     | 29.56                      | -4.98                   | 24.58                     | 46.00           | -21.42       | QP       |
| 6   | 749.7400     | 33.29                      | -1.97                   | 31.32                     | 46.00           | -14.68       | QP       |

|               |                                                    |                   |          |
|---------------|----------------------------------------------------|-------------------|----------|
| EUT           | HUAWEI MediaPad T2 7.0 (MediaPad T2 7.0 for short) | Model Name        | BGO-L03  |
| Temperature   | 25°C                                               | Relative Humidity | 60%      |
| Test Voltage  | AC 120V/60Hz                                       | Polarization      | Vertical |
| Test Mode     | Adapter+WIFI+BT+GPS+Camera On                      |                   |          |
| Note          | USB Cable:Luxshare+Adapter:BYD                     |                   |          |
| Test Engineer | Lucky Mao                                          |                   |          |

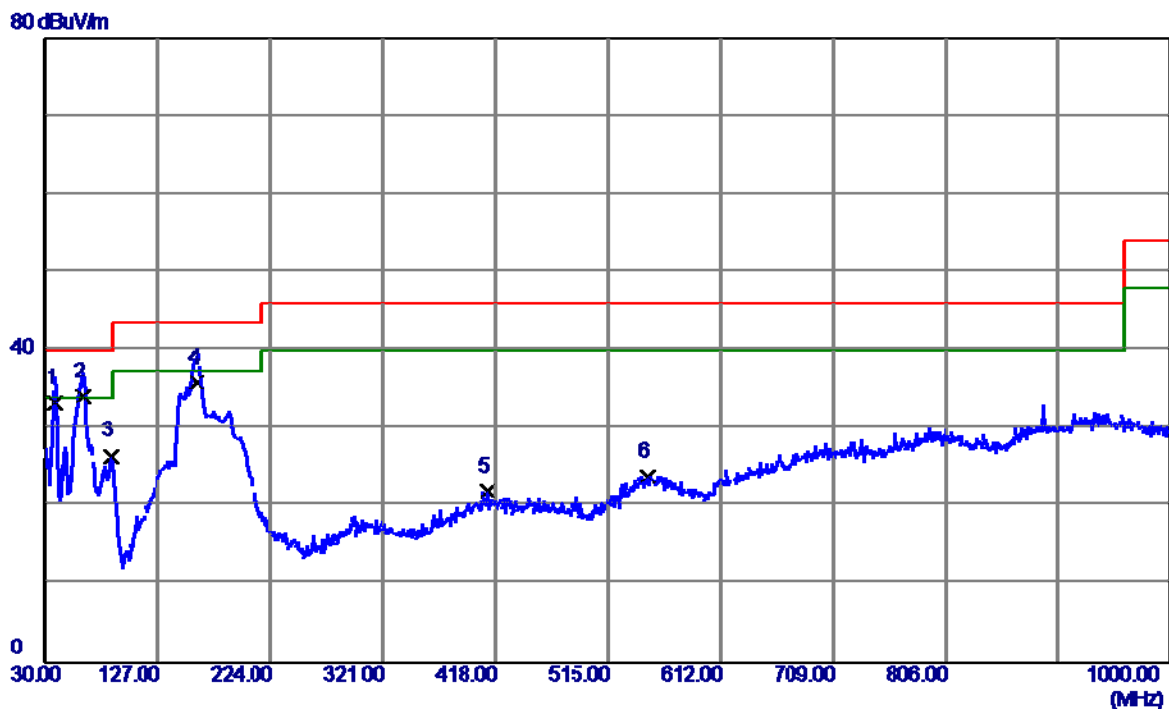


| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|
| 1   | 38.7300      | 47.28                      | -14.06                  | 33.22                     | 40.00           | -6.78        | QP       |
| 2 * | 62.0100      | 48.32                      | -14.30                  | 34.02                     | 40.00           | -5.98        | QP       |
| 3   | 87.2300      | 43.90                      | -17.42                  | 26.48                     | 40.00           | -13.52       | QP       |
| 4   | 160.9500     | 47.99                      | -12.16                  | 35.83                     | 43.50           | -7.67        | QP       |
| 5   | 411.2100     | 29.69                      | -7.83                   | 21.86                     | 46.00           | -24.14       | QP       |
| 6   | 549.9200     | 28.46                      | -4.55                   | 23.91                     | 46.00           | -22.09       | QP       |

|               |                                                    |                   |            |
|---------------|----------------------------------------------------|-------------------|------------|
| EUT           | HUAWEI MediaPad T2 7.0 (MediaPad T2 7.0 for short) | Model Name        | BGO-L03    |
| Temperature   | 25°C                                               | Relative Humidity | 60%        |
| Test Voltage  | AC 120V/60Hz                                       | Polarization      | Horizontal |
| Test Mode     | Adapter+WIFI+BT+GPS+Camera On                      |                   |            |
| Note          | USB Cable:Luxshare+Adapter:BYD                     |                   |            |
| Test Engineer | Lucky Mao                                          |                   |            |

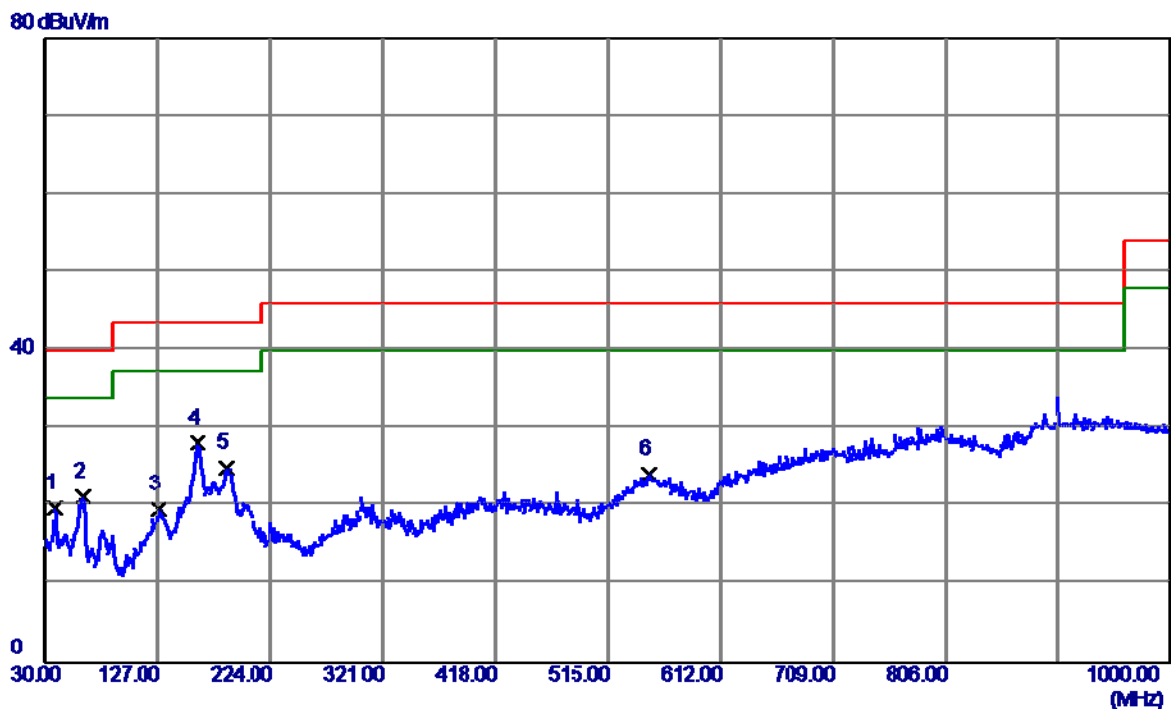


| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|
| 1   | 38.7300      | 33.92                      | -14.06                  | 19.86                     | 40.00           | -20.14       | QP       |
| 2   | 62.0100      | 35.60                      | -14.30                  | 21.30                     | 40.00           | -18.70       | QP       |
| 3   | 127.9700     | 32.25                      | -12.58                  | 19.67                     | 43.50           | -23.83       | QP       |
| 4 * | 161.9200     | 40.34                      | -12.16                  | 28.18                     | 43.50           | -15.32       | QP       |
| 5   | 186.1700     | 38.40                      | -13.51                  | 24.89                     | 43.50           | -18.61       | QP       |
| 6   | 550.8900     | 28.81                      | -4.58                   | 24.23                     | 46.00           | -21.77       | QP       |

|               |                                                    |                   |          |
|---------------|----------------------------------------------------|-------------------|----------|
| EUT           | HUAWEI MediaPad T2 7.0 (MediaPad T2 7.0 for short) | Model Name        | BGO-L03  |
| Temperature   | 25°C                                               | Relative Humidity | 60%      |
| Test Voltage  | AC 120V/60Hz                                       | Polarization      | Vertical |
| Test Mode     | Adapter+WIFI+BT+GPS+Camera On                      |                   |          |
| Note          | USB Cable:Luxshare+Adapter:Huntkey                 |                   |          |
| Test Engineer | Lucky Mao                                          |                   |          |

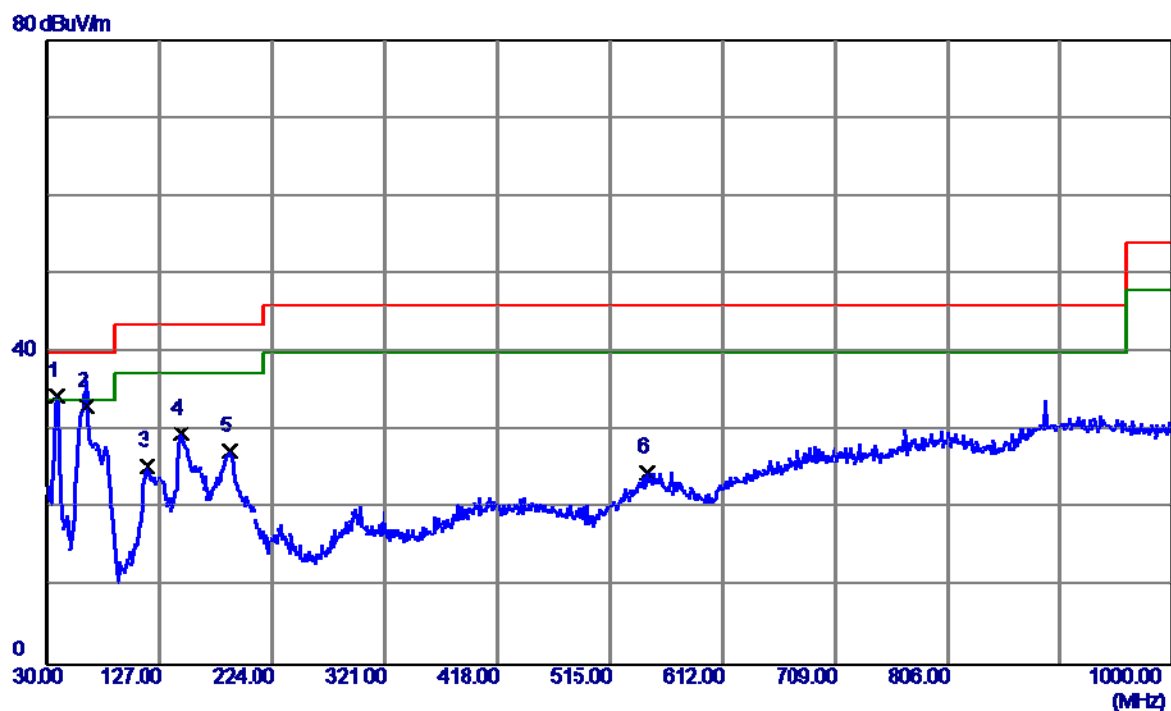


| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|
| 1 * | 38.7300      | 48.49                      | -14.06                  | 34.43                     | 40.00           | -5.57        | QP       |
| 2   | 62.9800      | 47.70                      | -14.58                  | 33.12                     | 40.00           | -6.88        | QP       |
| 3   | 116.3300     | 39.40                      | -13.90                  | 25.50                     | 43.50           | -18.00       | QP       |
| 4   | 145.4299     | 42.98                      | -13.32                  | 29.66                     | 43.50           | -13.84       | QP       |
| 5   | 187.1400     | 40.93                      | -13.62                  | 27.31                     | 43.50           | -16.19       | QP       |
| 6   | 547.0100     | 29.54                      | -4.85                   | 24.69                     | 46.00           | -21.31       | QP       |

|               |                                                    |                   |            |
|---------------|----------------------------------------------------|-------------------|------------|
| EUT           | HUAWEI MediaPad T2 7.0 (MediaPad T2 7.0 for short) | Model Name        | BGO-L03    |
| Temperature   | 25°C                                               | Relative Humidity | 60%        |
| Test Voltage  | AC 120V/60Hz                                       | Polarization      | Horizontal |
| Test Mode     | Adapter+WIFI+BT+GPS+Camera On                      |                   |            |
| Note          | USB Cable:Luxshare+Adapter:Huntkey                 |                   |            |
| Test Engineer | Lucky Mao                                          |                   |            |

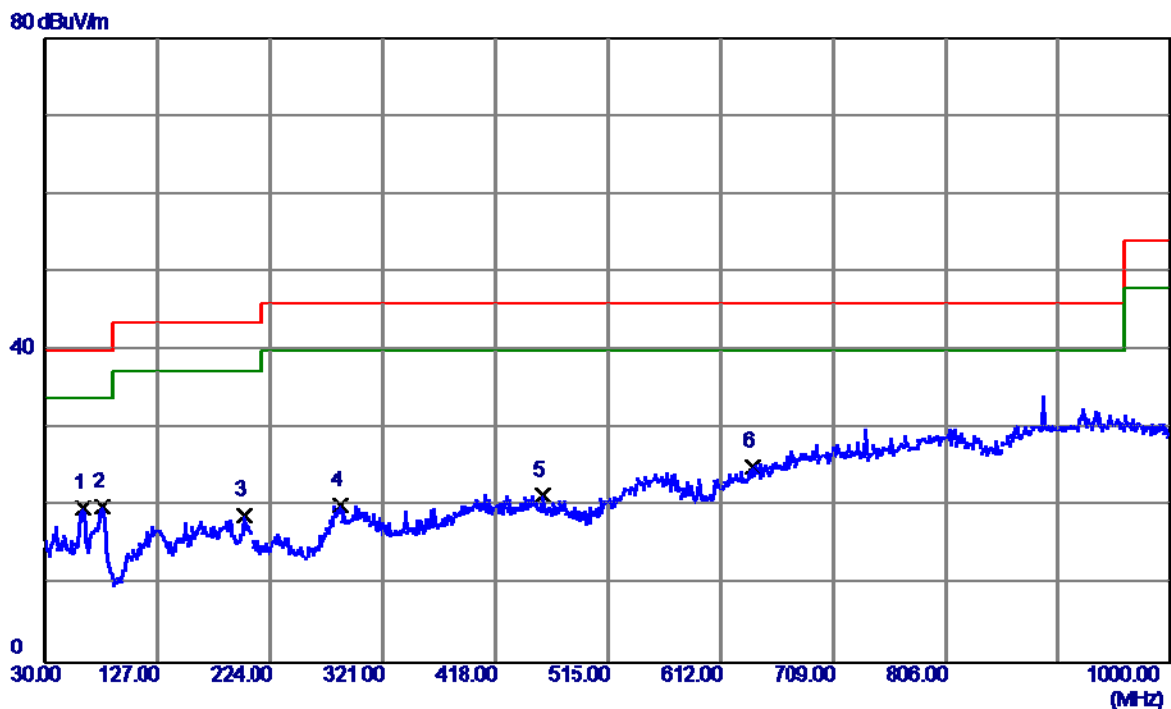


| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|
| 1   | 62.0100      | 34.16                      | -14.30                  | 19.86                     | 40.00           | -20.14       | QP       |
| 2 * | 79.4700      | 36.17                      | -16.10                  | 20.07                     | 40.00           | -19.93       | QP       |
| 3   | 201.6900     | 33.32                      | -14.47                  | 18.85                     | 43.50           | -24.65       | QP       |
| 4   | 284.1400     | 31.90                      | -11.71                  | 20.19                     | 46.00           | -25.81       | QP       |
| 5   | 458.7400     | 29.72                      | -8.30                   | 21.42                     | 46.00           | -24.58       | QP       |
| 6   | 640.1300     | 29.88                      | -4.75                   | 25.13                     | 46.00           | -20.87       | QP       |

|               |                                                    |                   |          |
|---------------|----------------------------------------------------|-------------------|----------|
| EUT           | HUAWEI MediaPad T2 7.0 (MediaPad T2 7.0 for short) | Model Name        | BGO-L03  |
| Temperature   | 25°C                                               | Relative Humidity | 60%      |
| Test Voltage  | AC 120V/60Hz                                       | Polarization      | Vertical |
| Test Mode     | Adapter+WIFI+BT+GPS+Camera On                      |                   |          |
| Note          | USB Cable:Luxshare+Adapter:Phitek                  |                   |          |
| Test Engineer | Lucky Mao                                          |                   |          |

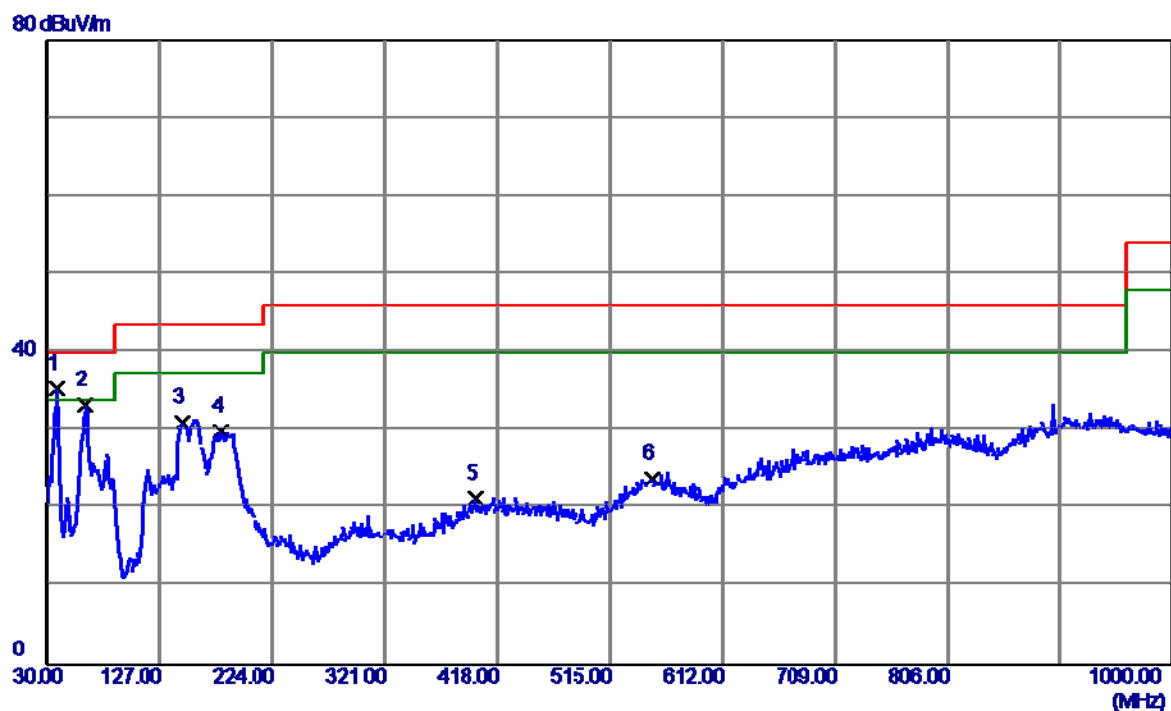


| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|
| 1 * | 38.7300      | 49.36                      | -14.06                  | 35.30                     | 40.00           | -4.70        | QP       |
| 2   | 62.0100      | 47.62                      | -14.30                  | 33.32                     | 40.00           | -6.68        | QP       |
| 3   | 146.4000     | 44.24                      | -13.24                  | 31.00                     | 43.50           | -12.50       | QP       |
| 4   | 180.3500     | 42.78                      | -12.88                  | 29.90                     | 43.50           | -13.60       | QP       |
| 5   | 399.5700     | 29.05                      | -7.81                   | 21.24                     | 46.00           | -24.76       | QP       |
| 6   | 551.8600     | 28.52                      | -4.63                   | 23.89                     | 46.00           | -22.11       | QP       |

|               |                                                    |                   |            |
|---------------|----------------------------------------------------|-------------------|------------|
| EUT           | HUAWEI MediaPad T2 7.0 (MediaPad T2 7.0 for short) | Model Name        | BGO-L03    |
| Temperature   | 25°C                                               | Relative Humidity | 60%        |
| Test Voltage  | AC 120V/60Hz                                       | Polarization      | Horizontal |
| Test Mode     | Adapter+WIFI+BT+GPS+Camera On                      |                   |            |
| Note          | USB Cable:Luxshare+Adapter:Phitek                  |                   |            |
| Test Engineer | Lucky Mao                                          |                   |            |

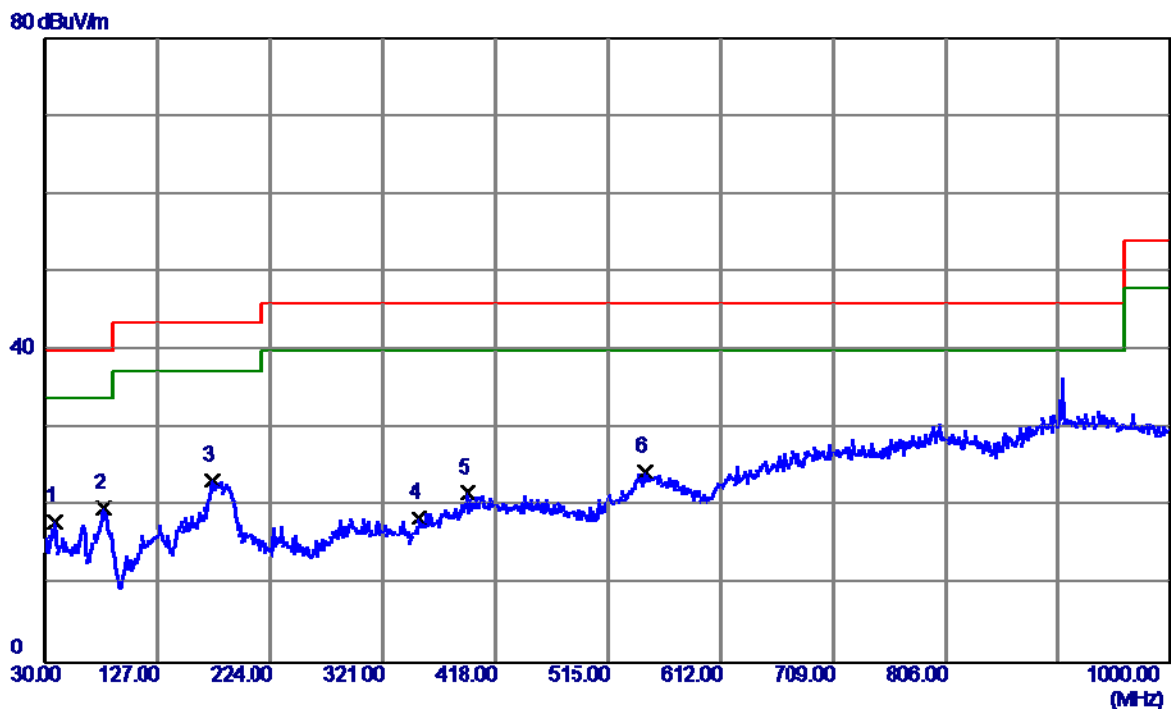


| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|
| 1   | 38.7300      | 32.16                      | -14.06                  | 18.10                     | 40.00           | -21.90       | QP       |
| 2 * | 80.4400      | 35.96                      | -16.16                  | 19.80                     | 40.00           | -20.20       | QP       |
| 3   | 174.5300     | 35.81                      | -12.51                  | 23.30                     | 43.50           | -20.20       | QP       |
| 4   | 352.0400     | 29.65                      | -11.08                  | 18.57                     | 46.00           | -27.43       | QP       |
| 5   | 394.7200     | 29.85                      | -8.14                   | 21.71                     | 46.00           | -24.29       | QP       |
| 6   | 547.0100     | 29.38                      | -4.85                   | 24.53                     | 46.00           | -21.47       | QP       |

|               |                                                    |                   |          |
|---------------|----------------------------------------------------|-------------------|----------|
| EUT           | HUAWEI MediaPad T2 7.0 (MediaPad T2 7.0 for short) | Model Name        | BGO-L03  |
| Temperature   | 25°C                                               | Relative Humidity | 60%      |
| Test Voltage  | AC 120V/60Hz                                       | Polarization      | Vertical |
| Test Mode     | Adapter+playing+speaker                            |                   |          |
| Note          | USB Cable:Luxshare+Adapter:BYD                     |                   |          |
| Test Engineer | Lucky Mao                                          |                   |          |

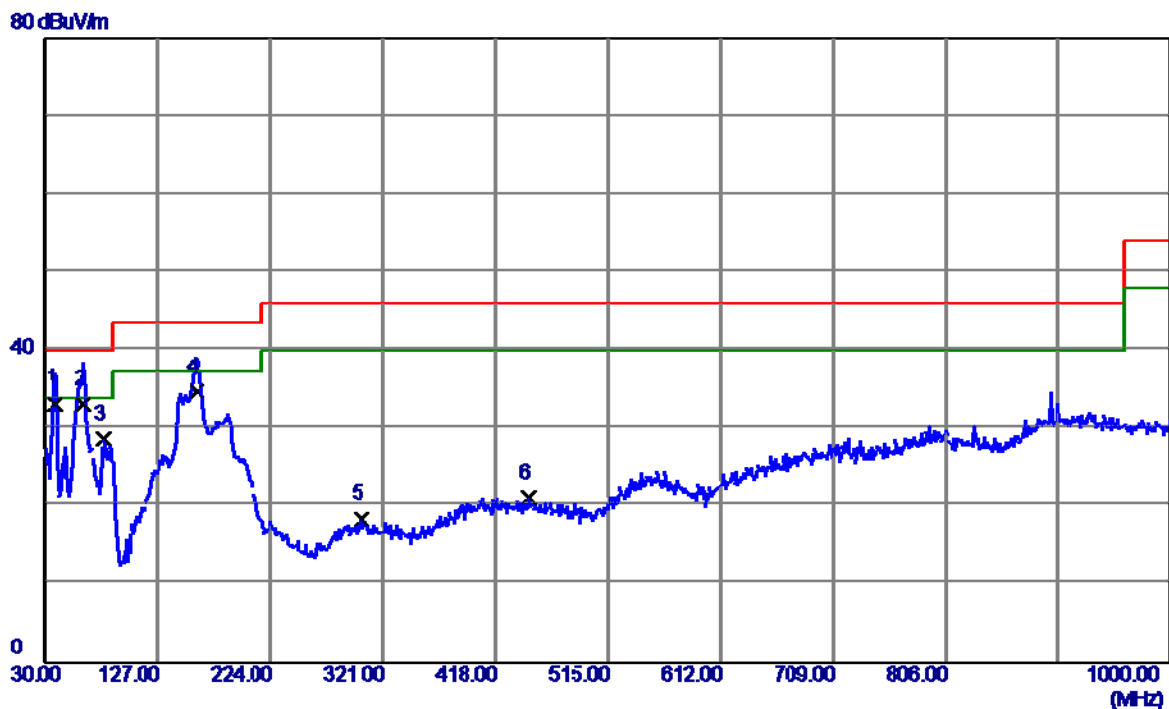


| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|
| 1 * | 38.7300      | 47.26                      | -14.06                  | 33.20                     | 40.00           | -6.80        | QP       |
| 2   | 62.0100      | 47.40                      | -14.30                  | 33.10                     | 40.00           | -6.90        | QP       |
| 3   | 80.4400      | 44.86                      | -16.16                  | 28.70                     | 40.00           | -11.30       | QP       |
| 4   | 159.9800     | 46.85                      | -12.15                  | 34.70                     | 43.50           | -8.80        | QP       |
| 5   | 302.5700     | 28.57                      | -10.21                  | 18.36                     | 46.00           | -27.64       | QP       |
| 6   | 447.1000     | 29.12                      | -7.99                   | 21.13                     | 46.00           | -24.87       | QP       |

|               |                                                    |                   |            |
|---------------|----------------------------------------------------|-------------------|------------|
| EUT           | HUAWEI MediaPad T2 7.0 (MediaPad T2 7.0 for short) | Model Name        | BGO-L03    |
| Temperature   | 25°C                                               | Relative Humidity | 60%        |
| Test Voltage  | AC 120V/60Hz                                       | Polarization      | Horizontal |
| Test Mode     | Adapter+playing+speaker                            |                   |            |
| Note          | USB Cable:Luxshare+Adapter:BYD                     |                   |            |
| Test Engineer | Lucky Mao                                          |                   |            |

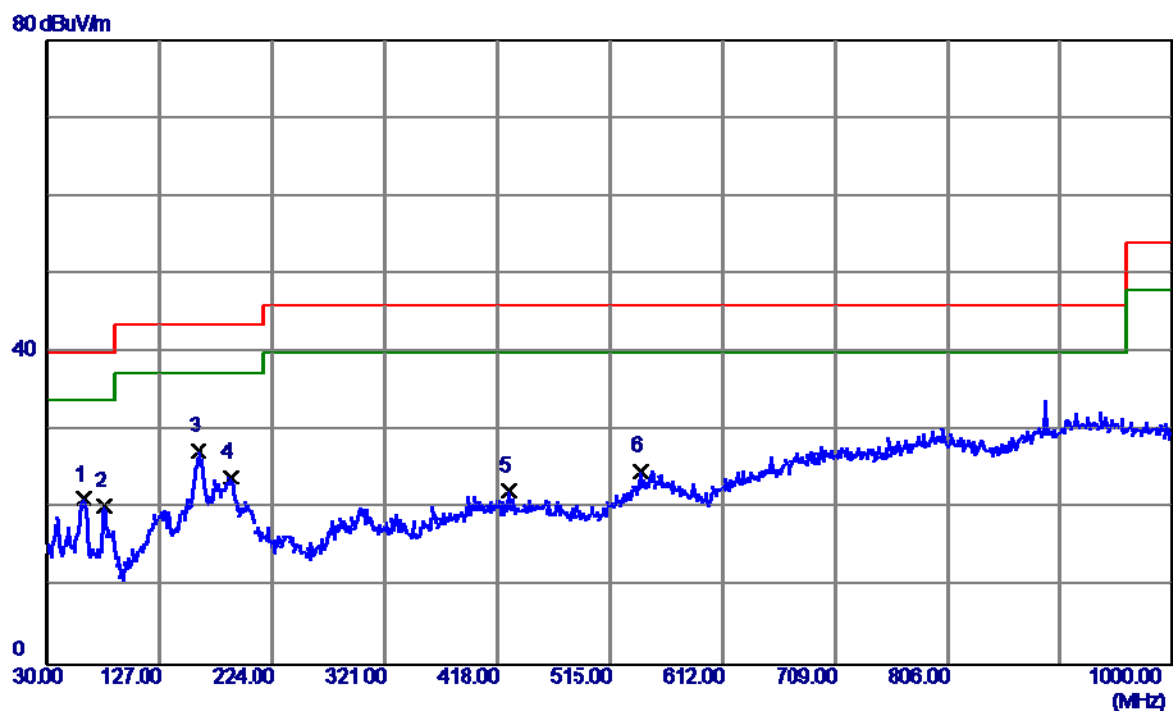


| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|
| 1   | 61.0400      | 35.22                      | -14.02                  | 21.20                     | 40.00           | -18.80       | QP       |
| 2   | 79.4700      | 36.45                      | -16.10                  | 20.35                     | 40.00           | -19.65       | QP       |
| 3 * | 159.9800     | 39.44                      | -12.15                  | 27.29                     | 43.50           | -16.21       | QP       |
| 4   | 188.1100     | 37.77                      | -13.73                  | 24.04                     | 43.50           | -19.46       | QP       |
| 5   | 427.7000     | 30.09                      | -7.90                   | 22.19                     | 46.00           | -23.81       | QP       |
| 6   | 542.1599     | 30.15                      | -5.35                   | 24.80                     | 46.00           | -21.20       | QP       |

|               |                                                    |                   |          |
|---------------|----------------------------------------------------|-------------------|----------|
| EUT           | HUAWEI MediaPad T2 7.0 (MediaPad T2 7.0 for short) | Model Name        | BGO-L03  |
| Temperature   | 25°C                                               | Relative Humidity | 60%      |
| Test Voltage  | AC 120V/60Hz                                       | Polarization      | Vertical |
| Test Mode     | Adapter+playing+Earphone                           |                   |          |
| Note          | USB Cable:Luxshare+Adapter:BYD+Earphone:GoerTek    |                   |          |
| Test Engineer | Lucky Mao                                          |                   |          |

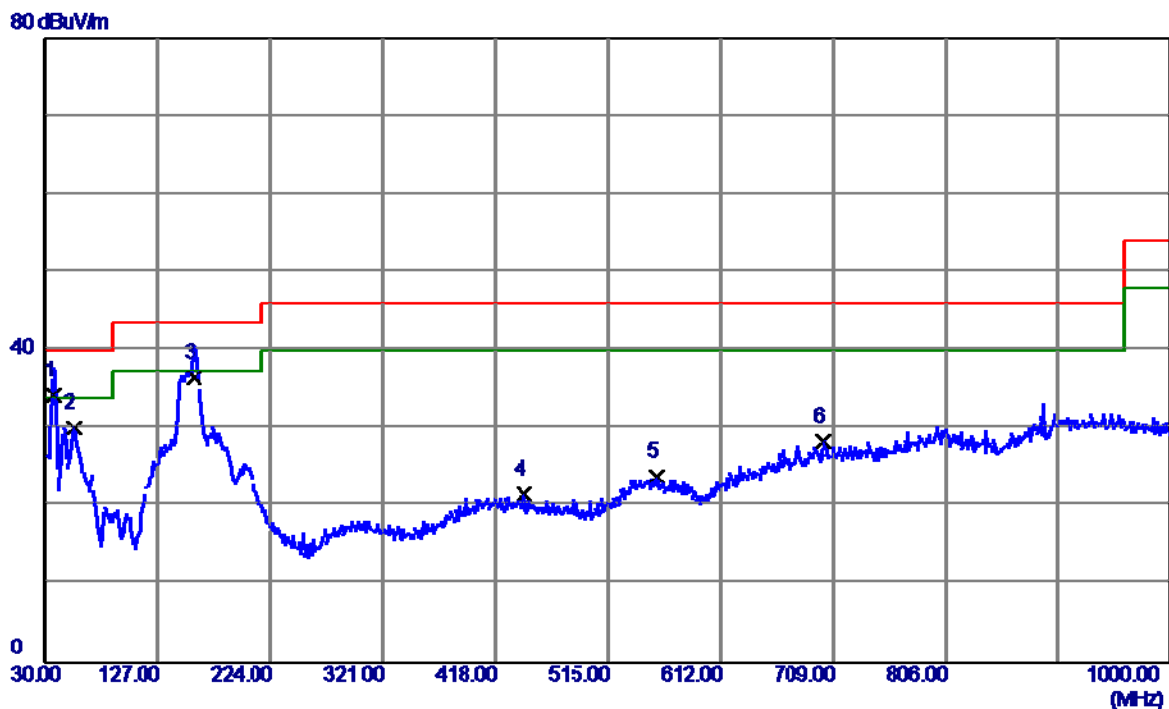


| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|
| 1 * | 37.7599      | 48.29                      | -14.09                  | 34.20                     | 40.00           | -5.80        | QP       |
| 2   | 54.2500      | 43.66                      | -13.53                  | 30.13                     | 40.00           | -9.87        | QP       |
| 3   | 158.0399     | 48.74                      | -12.30                  | 36.44                     | 43.50           | -7.06        | QP       |
| 4   | 443.2200     | 29.58                      | -7.97                   | 21.61                     | 46.00           | -24.39       | QP       |
| 5   | 556.7100     | 28.74                      | -4.88                   | 23.86                     | 46.00           | -22.14       | QP       |
| 6   | 700.2700     | 30.49                      | -2.10                   | 28.39                     | 46.00           | -17.61       | QP       |

|               |                                                    |                   |            |
|---------------|----------------------------------------------------|-------------------|------------|
| EUT           | HUAWEI MediaPad T2 7.0 (MediaPad T2 7.0 for short) | Model Name        | BGO-L03    |
| Temperature   | 25°C                                               | Relative Humidity | 60%        |
| Test Voltage  | AC 120V/60Hz                                       | Polarization      | Horizontal |
| Test Mode     | Adapter+playing+Earphone                           |                   |            |
| Note          | USB Cable:Luxshare+Adapter:BYD+Earphone:GoerTek    |                   |            |
| Test Engineer | Lucky Mao                                          |                   |            |

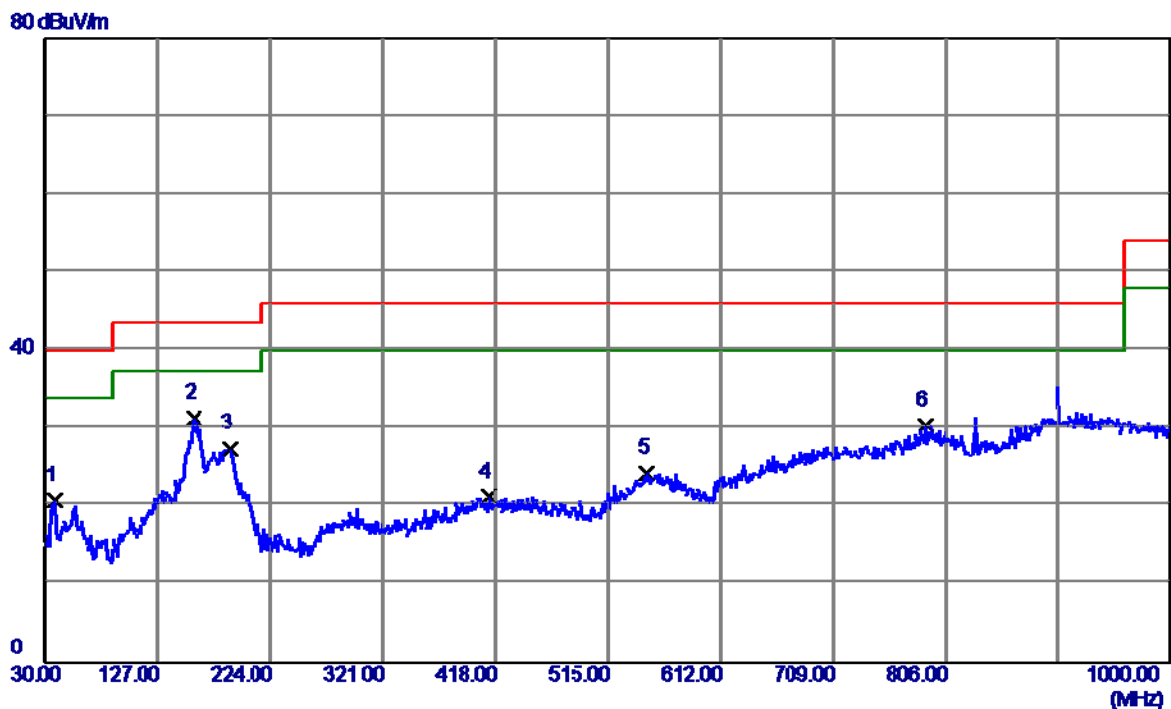


| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|
| 1   | 38.7300      | 34.79                      | -14.06                  | 20.73                     | 40.00           | -19.27       | QP       |
| 2 * | 158.0399     | 43.72                      | -12.30                  | 31.42                     | 43.50           | -12.08       | QP       |
| 3   | 189.0800     | 41.27                      | -13.83                  | 27.44                     | 43.50           | -16.06       | QP       |
| 4   | 412.1800     | 29.17                      | -7.83                   | 21.34                     | 46.00           | -24.66       | QP       |
| 5   | 548.9500     | 28.91                      | -4.65                   | 24.26                     | 46.00           | -21.74       | QP       |
| 6   | 788.5400     | 30.68                      | -0.25                   | 30.43                     | 46.00           | -15.57       | QP       |

|               |                                                    |                   |          |
|---------------|----------------------------------------------------|-------------------|----------|
| EUT           | HUAWEI MediaPad T2 7.0 (MediaPad T2 7.0 for short) | Model Name        | BGO-L03  |
| Temperature   | 25°C                                               | Relative Humidity | 60%      |
| Test Voltage  | AC 120V/60Hz                                       | Polarization      | Vertical |
| Test Mode     | Adapter+playing+Earphone                           |                   |          |
| Note          | USB Cable:Luxshare+Adapter:BYD+Earphone:Lianchuang |                   |          |
| Test Engineer | Lucky Mao                                          |                   |          |

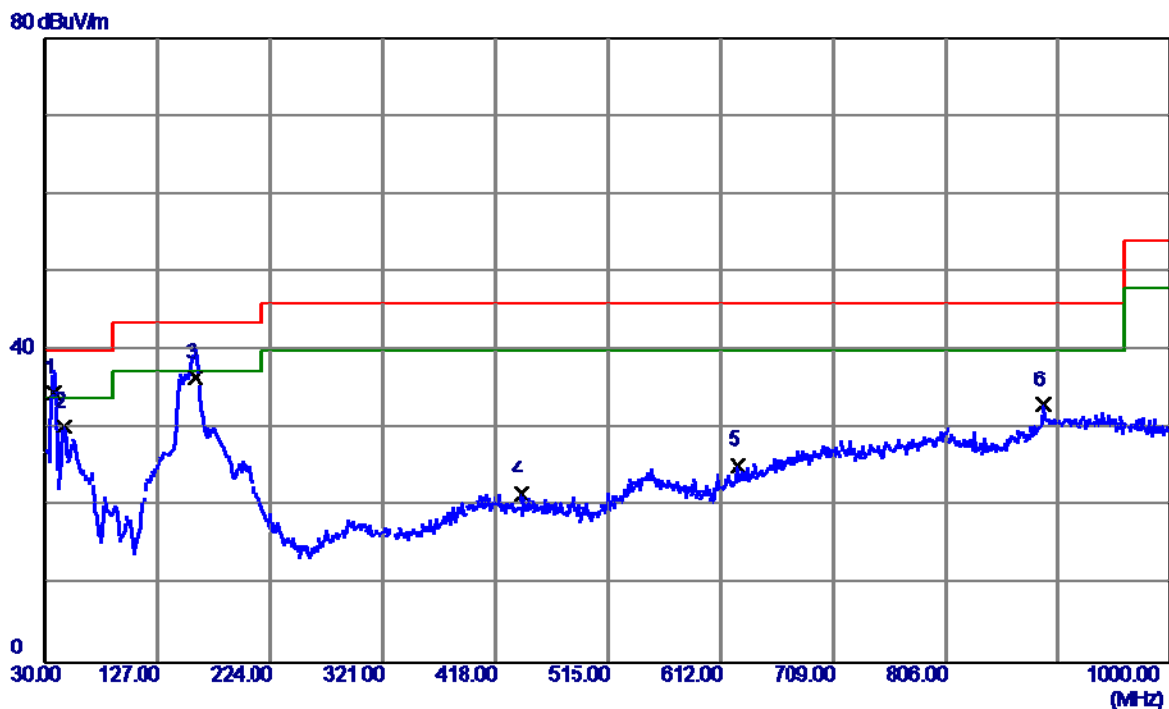


| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|
| 1 * | 37.7599      | 48.60                      | -14.09                  | 34.51                     | 40.00           | -5.49        | QP       |
| 2   | 46.4900      | 42.77                      | -12.59                  | 30.18                     | 40.00           | -9.82        | QP       |
| 3   | 159.0100     | 48.70                      | -12.23                  | 36.47                     | 43.50           | -7.03        | QP       |
| 4   | 440.3100     | 29.49                      | -7.96                   | 21.53                     | 46.00           | -24.47       | QP       |
| 5   | 627.5200     | 30.71                      | -5.47                   | 25.24                     | 46.00           | -20.76       | QP       |
| 6   | 890.3900     | 31.15                      | 1.89                    | 33.04                     | 46.00           | -12.96       | QP       |

|               |                                                    |                   |            |
|---------------|----------------------------------------------------|-------------------|------------|
| EUT           | HUAWEI MediaPad T2 7.0 (MediaPad T2 7.0 for short) | Model Name        | BGO-L03    |
| Temperature   | 25°C                                               | Relative Humidity | 60%        |
| Test Voltage  | AC 120V/60Hz                                       | Polarization      | Horizontal |
| Test Mode     | Adapter+playing+Earphone                           |                   |            |
| Note          | USB Cable:Luxshare+Adapter:BYD+Earphone:Lianchuang |                   |            |
| Test Engineer | Lucky Mao                                          |                   |            |

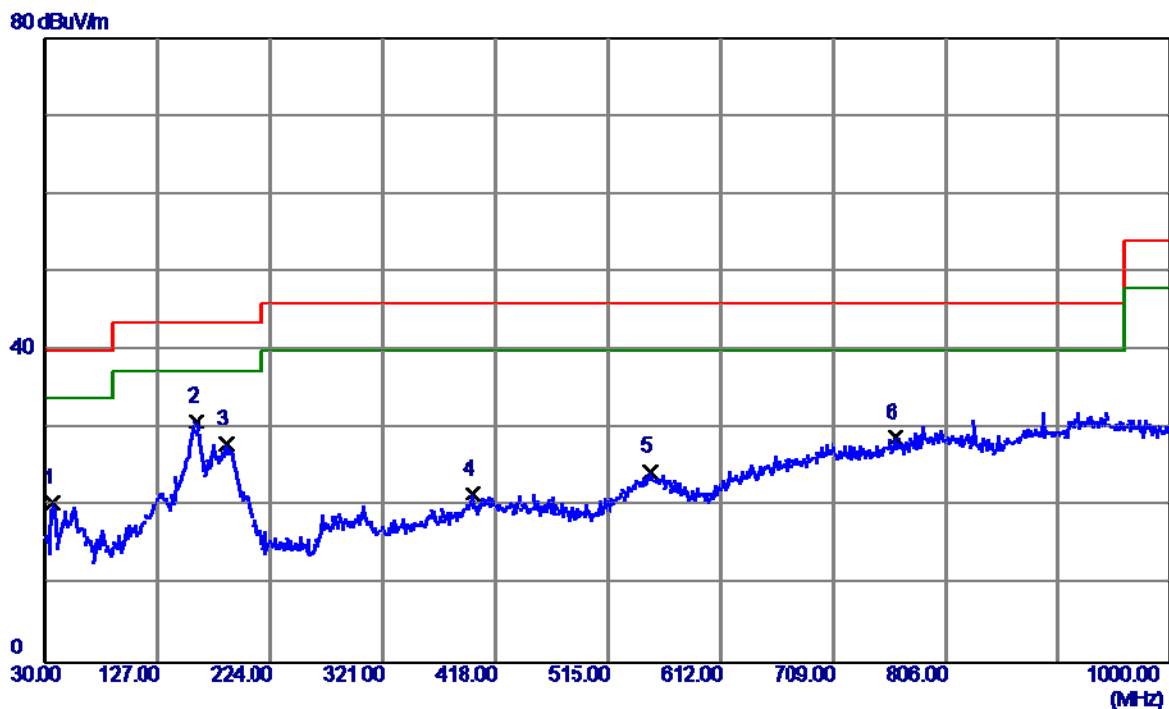


| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|
| 1   | 36.7900      | 34.37                      | -13.91                  | 20.46                     | 40.00           | -19.54       | QP       |
| 2 * | 159.9800     | 43.08                      | -12.15                  | 30.93                     | 43.50           | -12.57       | QP       |
| 3   | 186.1700     | 41.45                      | -13.51                  | 27.94                     | 43.50           | -15.56       | QP       |
| 4   | 398.6000     | 29.54                      | -7.88                   | 21.66                     | 46.00           | -24.34       | QP       |
| 5   | 551.8600     | 29.05                      | -4.63                   | 24.42                     | 46.00           | -21.58       | QP       |
| 6   | 763.3200     | 30.25                      | -1.38                   | 28.87                     | 46.00           | -17.13       | QP       |

|               |                                                    |                   |          |
|---------------|----------------------------------------------------|-------------------|----------|
| EUT           | HUAWEI MediaPad T2 7.0 (MediaPad T2 7.0 for short) | Model Name        | BGO-L03  |
| Temperature   | 25°C                                               | Relative Humidity | 60%      |
| Test Voltage  | AC 120V/60Hz                                       | Polarization      | Vertical |
| Test Mode     | Adapter+playing+Earphone                           |                   |          |
| Note          | USB Cable:Luxshare+Adapter:BYD+Earphone:QUANCHENG  |                   |          |
| Test Engineer | Lucky Mao                                          |                   |          |

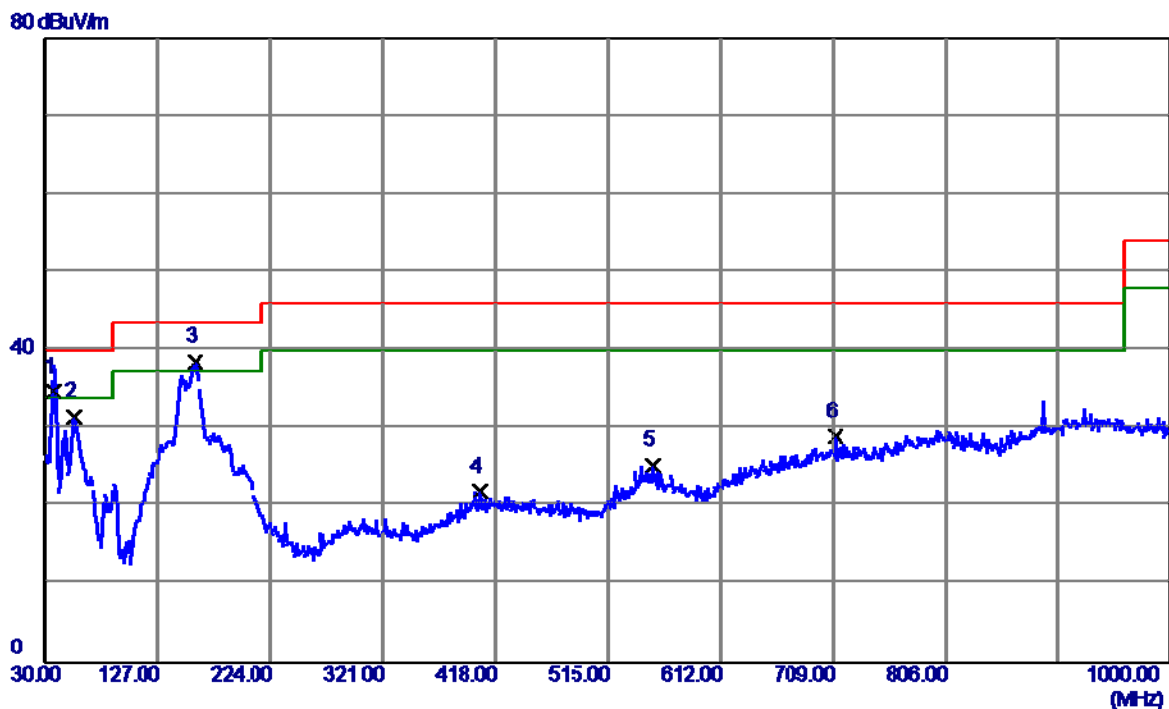


| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|
| 1   | 37.7599      | 48.74                      | -14.09                  | 34.65                     | 40.00           | -5.35        | QP       |
| 2   | 55.2200      | 44.97                      | -13.38                  | 31.59                     | 40.00           | -8.41        | QP       |
| 3 * | 159.0100     | 50.85                      | -12.23                  | 38.62                     | 43.50           | -4.88        | QP       |
| 4   | 405.3900     | 29.78                      | -7.80                   | 21.98                     | 46.00           | -24.02       | QP       |
| 5   | 553.8000     | 30.04                      | -4.73                   | 25.31                     | 46.00           | -20.69       | QP       |
| 6   | 710.9400     | 30.96                      | -2.07                   | 28.89                     | 46.00           | -17.11       | QP       |

|               |                                                    |                   |            |
|---------------|----------------------------------------------------|-------------------|------------|
| EUT           | HUAWEI MediaPad T2 7.0 (MediaPad T2 7.0 for short) | Model Name        | BGO-L03    |
| Temperature   | 25°C                                               | Relative Humidity | 60%        |
| Test Voltage  | AC 120V/60Hz                                       | Polarization      | Horizontal |
| Test Mode     | Adapter+playing+Earphone                           |                   |            |
| Note          | USB Cable:Luxshare+Adapter:BYD+Earphone:QUANCHENG  |                   |            |
| Test Engineer | Lucky Mao                                          |                   |            |

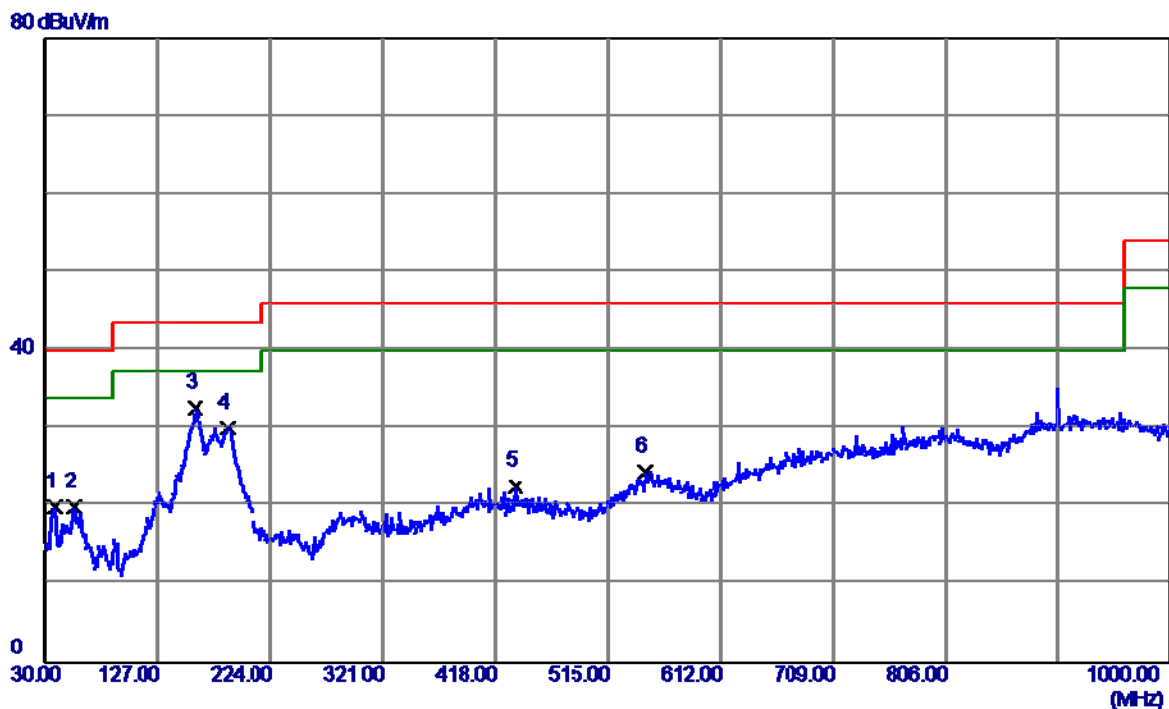


| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|
| 1   | 38.7300      | 34.09                      | -14.06                  | 20.03                     | 40.00           | -19.97       | QP       |
| 2   | 55.2200      | 33.36                      | -13.38                  | 19.98                     | 40.00           | -20.02       | QP       |
| 3 * | 159.0100     | 44.81                      | -12.23                  | 32.58                     | 43.50           | -10.92       | QP       |
| 4   | 187.1400     | 43.69                      | -13.62                  | 30.07                     | 43.50           | -13.43       | QP       |
| 5   | 435.4600     | 30.58                      | -7.94                   | 22.64                     | 46.00           | -23.36       | QP       |
| 6   | 547.0100     | 29.27                      | -4.85                   | 24.42                     | 46.00           | -21.58       | QP       |

|               |                                                    |                   |          |
|---------------|----------------------------------------------------|-------------------|----------|
| EUT           | HUAWEI MediaPad T2 7.0 (MediaPad T2 7.0 for short) | Model Name        | BGO-L03  |
| Temperature   | 25°C                                               | Relative Humidity | 60%      |
| Test Voltage  | AC 120V/60Hz                                       | Polarization      | Vertical |
| Test Mode     | Adapter+Traffic(GSM)                               |                   |          |
| Note          | USB Cable:Luxshare+Adapter:BYD                     |                   |          |
| Test Engineer | Lucky Mao                                          |                   |          |

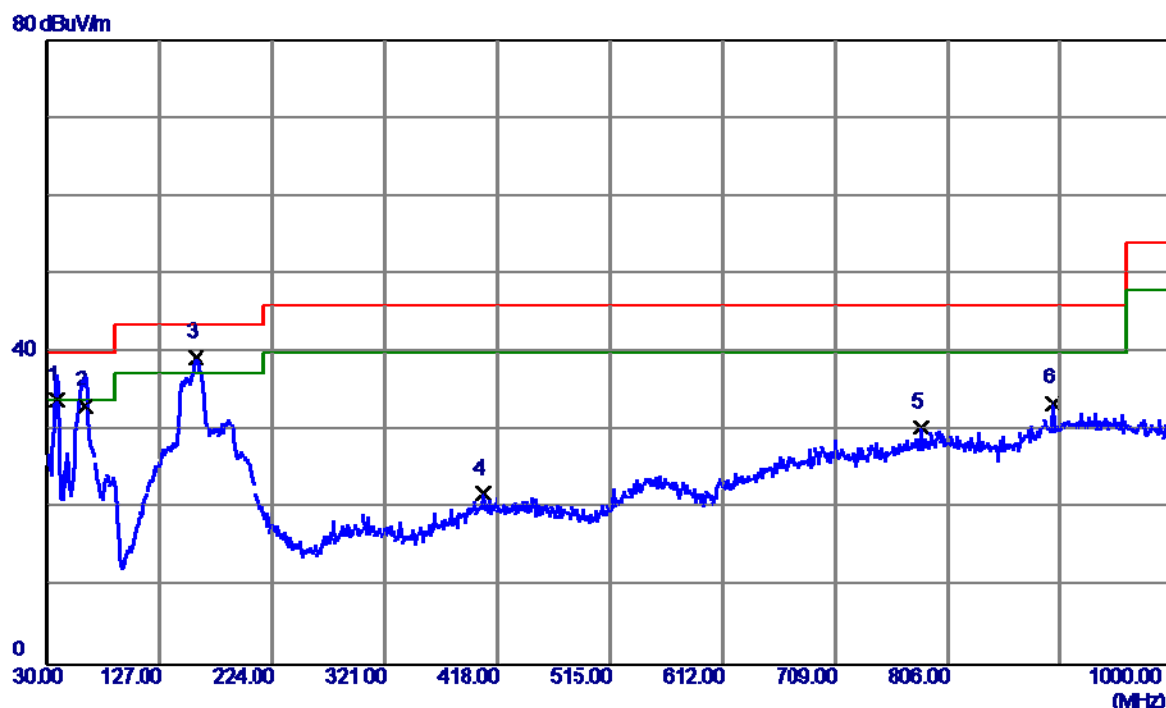


| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|
| 1   | 38.7300      | 47.96                      | -14.06                  | 33.90                     | 40.00           | -6.10        | QP       |
| 2   | 62.0100      | 47.50                      | -14.30                  | 33.20                     | 40.00           | -6.80        | QP       |
| 3 * | 158.0399     | 51.73                      | -12.30                  | 39.43                     | 43.50           | -4.07        | QP       |
| 4   | 406.3599     | 29.66                      | -7.81                   | 21.85                     | 46.00           | -24.15       | QP       |
| 5   | 783.6900     | 30.94                      | -0.47                   | 30.47                     | 46.00           | -15.53       | QP       |
| 6   | 896.2100     | 31.17                      | 2.35                    | 33.52                     | 46.00           | -12.48       | QP       |

|               |                                                    |                   |            |
|---------------|----------------------------------------------------|-------------------|------------|
| EUT           | HUAWEI MediaPad T2 7.0 (MediaPad T2 7.0 for short) | Model Name        | BGO-L03    |
| Temperature   | 25°C                                               | Relative Humidity | 60%        |
| Test Voltage  | AC 120V/60Hz                                       | Polarization      | Horizontal |
| Test Mode     | Adapter+Traffic(GSM)                               |                   |            |
| Note          | USB Cable:Luxshare+Adapter:BYD                     |                   |            |
| Test Engineer | Lucky Mao                                          |                   |            |

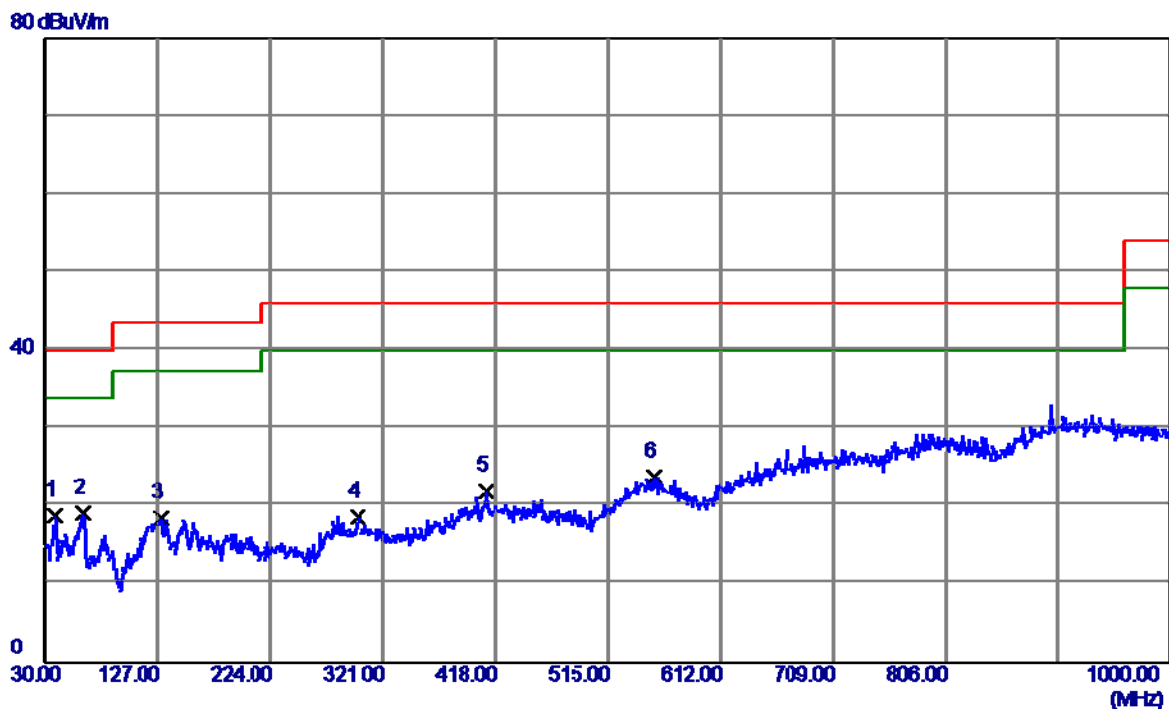


| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|
| 1   | 38.7300      | 32.98                      | -14.06                  | 18.92                     | 40.00           | -21.08       | QP       |
| 2 * | 62.0100      | 33.48                      | -14.30                  | 19.18                     | 40.00           | -20.82       | QP       |
| 3   | 129.9100     | 30.92                      | -12.36                  | 18.56                     | 43.50           | -24.94       | QP       |
| 4   | 299.6600     | 28.90                      | -10.20                  | 18.70                     | 46.00           | -27.30       | QP       |
| 5   | 410.2400     | 29.83                      | -7.83                   | 22.00                     | 46.00           | -24.00       | QP       |
| 6   | 554.7700     | 28.55                      | -4.78                   | 23.77                     | 46.00           | -22.23       | QP       |

|               |                                                    |                   |          |
|---------------|----------------------------------------------------|-------------------|----------|
| EUT           | HUAWEI MediaPad T2 7.0 (MediaPad T2 7.0 for short) | Model Name        | BGO-L03  |
| Temperature   | 25°C                                               | Relative Humidity | 60%      |
| Test Voltage  | AC 120V/60Hz                                       | Polarization      | Vertical |
| Test Mode     | Adapter+Traffic(WCDMA)                             |                   |          |
| Note          | USB Cable:Luxshare+Adapter:BYD                     |                   |          |
| Test Engineer | Lucky Mao                                          |                   |          |

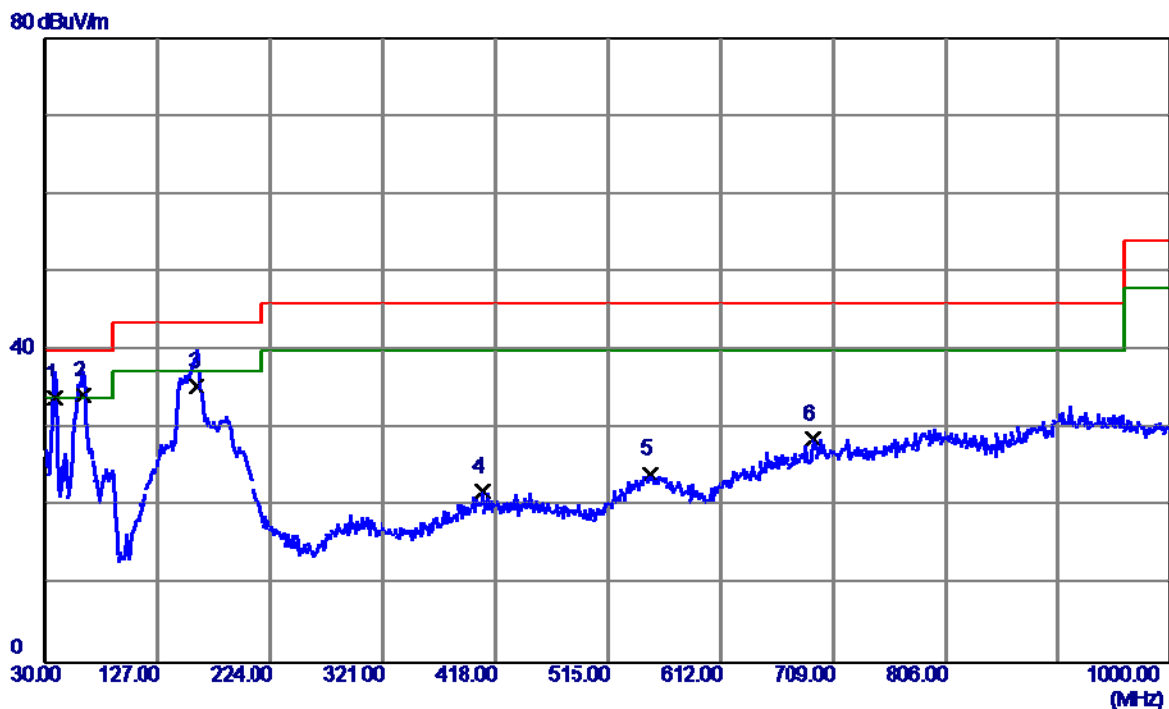


| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|
| 1   | 38.7300      | 47.96                      | -14.06                  | 33.90                     | 40.00           | -6.10        | QP       |
| 2 * | 62.0100      | 48.50                      | -14.30                  | 34.20                     | 40.00           | -5.80        | QP       |
| 3   | 160.9500     | 47.57                      | -12.16                  | 35.41                     | 43.50           | -8.09        | QP       |
| 4   | 407.3299     | 29.80                      | -7.81                   | 21.99                     | 46.00           | -24.01       | QP       |
| 5   | 551.8600     | 28.77                      | -4.63                   | 24.14                     | 46.00           | -21.86       | QP       |
| 6   | 691.5400     | 31.09                      | -2.45                   | 28.64                     | 46.00           | -17.36       | QP       |

|               |                                                    |                   |            |
|---------------|----------------------------------------------------|-------------------|------------|
| EUT           | HUAWEI MediaPad T2 7.0 (MediaPad T2 7.0 for short) | Model Name        | BGO-L03    |
| Temperature   | 25°C                                               | Relative Humidity | 60%        |
| Test Voltage  | AC 120V/60Hz                                       | Polarization      | Horizontal |
| Test Mode     | Adapter+Traffic(WCDMA)                             |                   |            |
| Note          | USB Cable:Luxshare+Adapter:BYD                     |                   |            |
| Test Engineer | Lucky Mao                                          |                   |            |

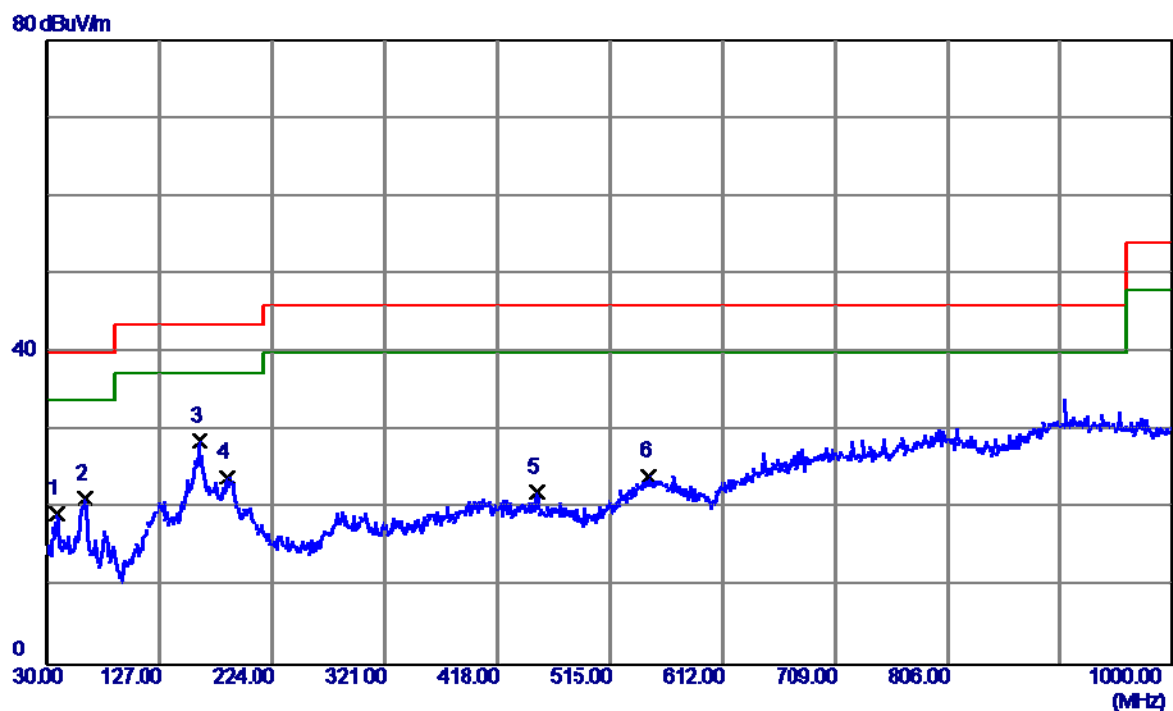


| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|
| 1   | 38.7300      | 33.47                      | -14.06                  | 19.41                     | 40.00           | -20.59       | QP       |
| 2   | 62.0100      | 35.54                      | -14.30                  | 21.24                     | 40.00           | -18.76       | QP       |
| 3 * | 161.9200     | 40.84                      | -12.16                  | 28.68                     | 43.50           | -14.82       | QP       |
| 4   | 185.2000     | 37.36                      | -13.41                  | 23.95                     | 43.50           | -19.55       | QP       |
| 5   | 452.9200     | 30.14                      | -8.10                   | 22.04                     | 46.00           | -23.96       | QP       |
| 6   | 548.9500     | 28.78                      | -4.65                   | 24.13                     | 46.00           | -21.87       | QP       |

|               |                                                    |                   |          |
|---------------|----------------------------------------------------|-------------------|----------|
| EUT           | HUAWEI MediaPad T2 7.0 (MediaPad T2 7.0 for short) | Model Name        | BGO-L03  |
| Temperature   | 25°C                                               | Relative Humidity | 60%      |
| Test Voltage  | AC 120V/60Hz                                       | Polarization      | Vertical |
| Test Mode     | Adapter+Traffic(LTE)                               |                   |          |
| Note          | USB Cable:Luxshare+Adapter:BYD                     |                   |          |
| Test Engineer | Lucky Mao                                          |                   |          |

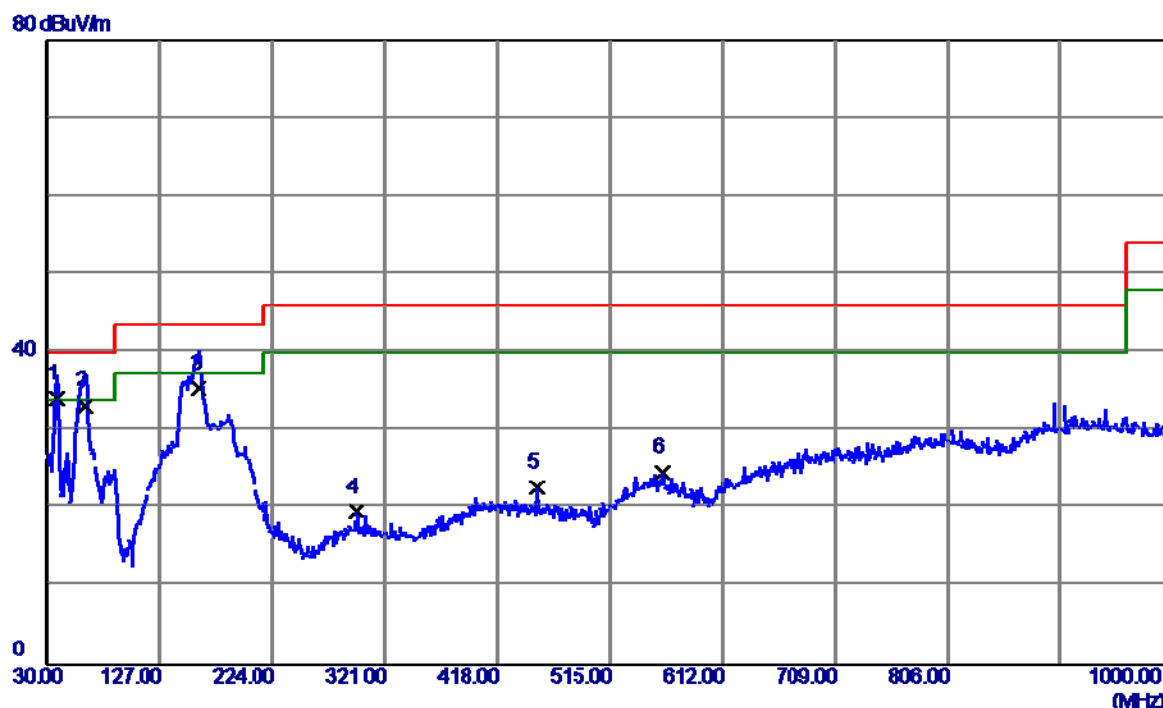

| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|
| 1 * | 38.7300      | 48.16                      | -14.06                  | 34.10                     | 40.00           | -5.90        | QP       |
| 2   | 62.0100      | 47.50                      | -14.30                  | 33.20                     | 40.00           | -6.80        | QP       |
| 3   | 160.9500     | 47.56                      | -12.16                  | 35.40                     | 43.50           | -8.10        | QP       |
| 4   | 295.7800     | 30.22                      | -10.62                  | 19.60                     | 46.00           | -26.40       | QP       |
| 5   | 452.9200     | 30.84                      | -8.10                   | 22.74                     | 46.00           | -23.26       | QP       |
| 6   | 560.5900     | 29.75                      | -5.07                   | 24.68                     | 46.00           | -21.32       | QP       |

|               |                                                    |                   |            |
|---------------|----------------------------------------------------|-------------------|------------|
| EUT           | HUAWEI MediaPad T2 7.0 (MediaPad T2 7.0 for short) | Model Name        | BGO-L03    |
| Temperature   | 25°C                                               | Relative Humidity | 60%        |
| Test Voltage  | AC 120V/60Hz                                       | Polarization      | Horizontal |
| Test Mode     | Adapter+Traffic(LTE)                               |                   |            |
| Note          | USB Cable:Luxshare+Adapter:BYD                     |                   |            |
| Test Engineer | Lucky Mao                                          |                   |            |

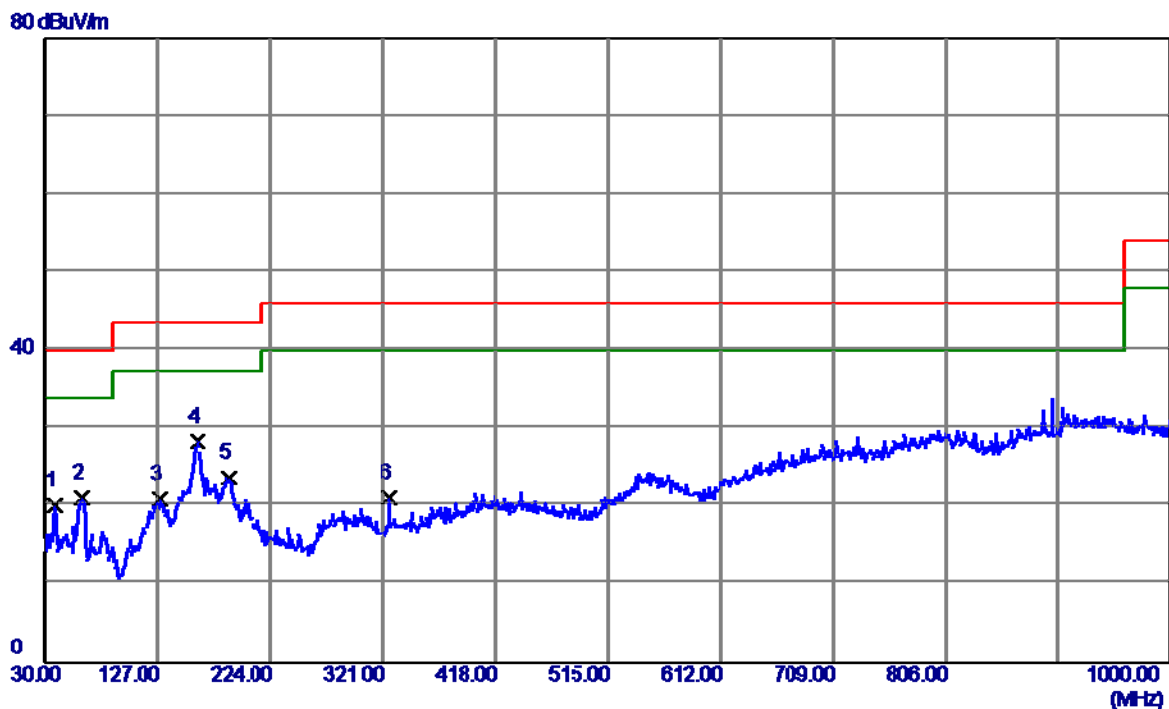


| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|
| 1   | 38.7300      | 34.20                      | -14.06                  | 20.14                     | 40.00           | -19.86       | QP       |
| 2   | 61.0400      | 35.07                      | -14.02                  | 21.05                     | 40.00           | -18.95       | QP       |
| 3   | 128.9400     | 33.44                      | -12.47                  | 20.97                     | 43.50           | -22.53       | QP       |
| 4 * | 161.9200     | 40.45                      | -12.16                  | 28.29                     | 43.50           | -15.21       | QP       |
| 5   | 188.1100     | 37.45                      | -13.73                  | 23.72                     | 43.50           | -19.78       | QP       |
| 6   | 325.8500     | 31.82                      | -10.71                  | 21.11                     | 46.00           | -24.89       | QP       |

#### 4.2.8 TEST RESULTS-ABOVE 1GHZ

Remark:


- (1) All readings are Peak unless otherwise stated QP in column of『Note』. Peak denotes that the Peak reading compliance with the QP Limits and then QP Mode measurement didn't perform.
- (2) Radiated emissions measured in frequency range above 1000MHz were made with an instrument using Peak detector mode and AV detector mode of the emission.
- (3) Data of measurement within this frequency range shown “ \* ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (4) A preamp and high pass filter were used for this test in order to provide sufficient measurement sensitivity.

|               |                                                    |                   |          |
|---------------|----------------------------------------------------|-------------------|----------|
| EUT           | HUAWEI MediaPad T2 7.0 (MediaPad T2 7.0 for short) | Model Name        | BGO-L03  |
| Temperature   | 25°C                                               | Relative Humidity | 60%      |
| Test Voltage  | AC 120V/60Hz                                       | Polarization      | Vertical |
| Test Mode     | USB copy(EUT with PC)+idle                         |                   |          |
| Note          | USB Cable:FOXCONN                                  |                   |          |
| Test Engineer | Lucky Mao                                          |                   |          |

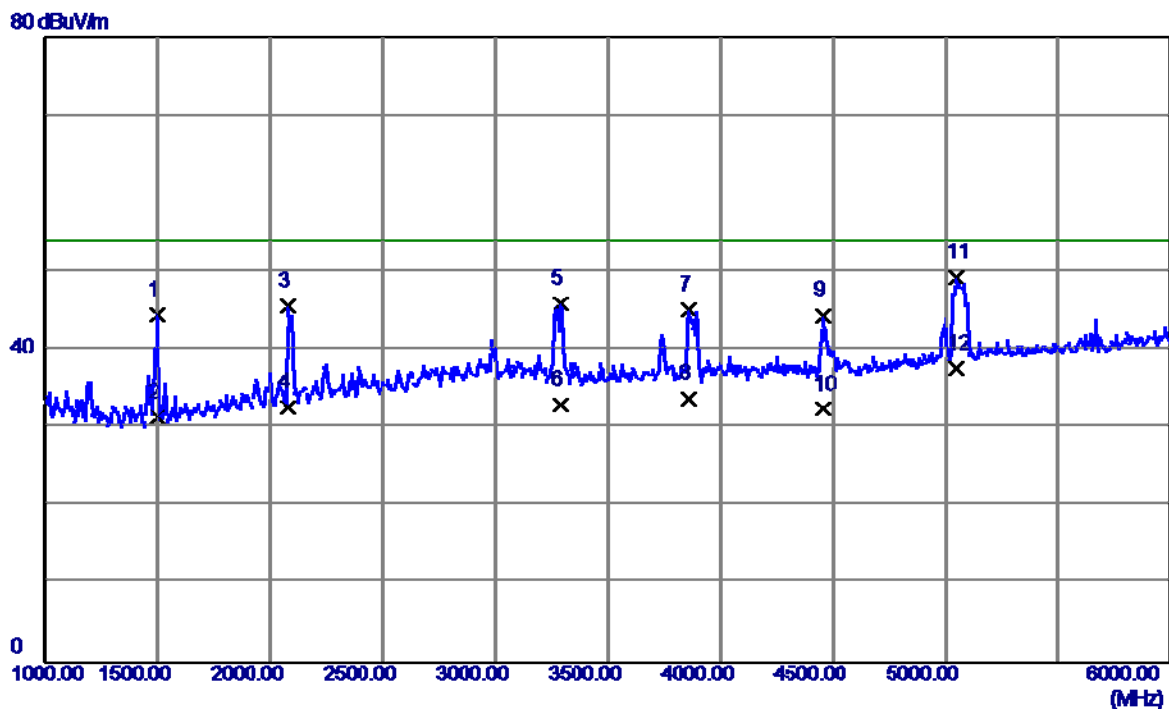

| No.  | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector |
|------|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|
| 1    | 1500.0000    | 51.19                      | -6.65                   | 44.54                     | 74.00           | -29.46       | Peak     |
| 2    | 1500.0000    | 38.05                      | -6.65                   | 31.40                     | 54.00           | -22.60       | AVG      |
| 3    | 2080.0000    | 48.12                      | -2.52                   | 45.60                     | 74.00           | -28.40       | Peak     |
| 4    | 2080.0000    | 35.22                      | -2.52                   | 32.70                     | 54.00           | -21.30       | AVG      |
| 5    | 3290.0000    | 44.50                      | 1.41                    | 45.91                     | 74.00           | -28.09       | Peak     |
| 6    | 3290.0000    | 31.49                      | 1.41                    | 32.90                     | 54.00           | -21.10       | AVG      |
| 7    | 3860.0000    | 42.70                      | 2.49                    | 45.19                     | 74.00           | -28.81       | Peak     |
| 8    | 3860.0000    | 31.31                      | 2.49                    | 33.80                     | 54.00           | -20.20       | AVG      |
| 9    | 4455.0000    | 40.97                      | 3.43                    | 44.40                     | 74.00           | -29.60       | Peak     |
| 10   | 4455.0000    | 28.97                      | 3.43                    | 32.40                     | 54.00           | -21.60       | AVG      |
| 11   | 5050.0000    | 43.48                      | 5.76                    | 49.24                     | 74.00           | -24.76       | Peak     |
| 12 * | 5050.0000    | 31.84                      | 5.76                    | 37.60                     | 54.00           | -16.40       | AVG      |


|               |                                                    |                   |            |
|---------------|----------------------------------------------------|-------------------|------------|
| EUT           | HUAWEI MediaPad T2 7.0 (MediaPad T2 7.0 for short) | Model Name        | BGO-L03    |
| Temperature   | 25°C                                               | Relative Humidity | 60%        |
| Test Voltage  | AC 120V/60Hz                                       | Polarization      | Horizontal |
| Test Mode     | USB copy(EUT with PC)+idle                         |                   |            |
| Note          | USB Cable:FOXCONN                                  |                   |            |
| Test Engineer | Lucky Mao                                          |                   |            |

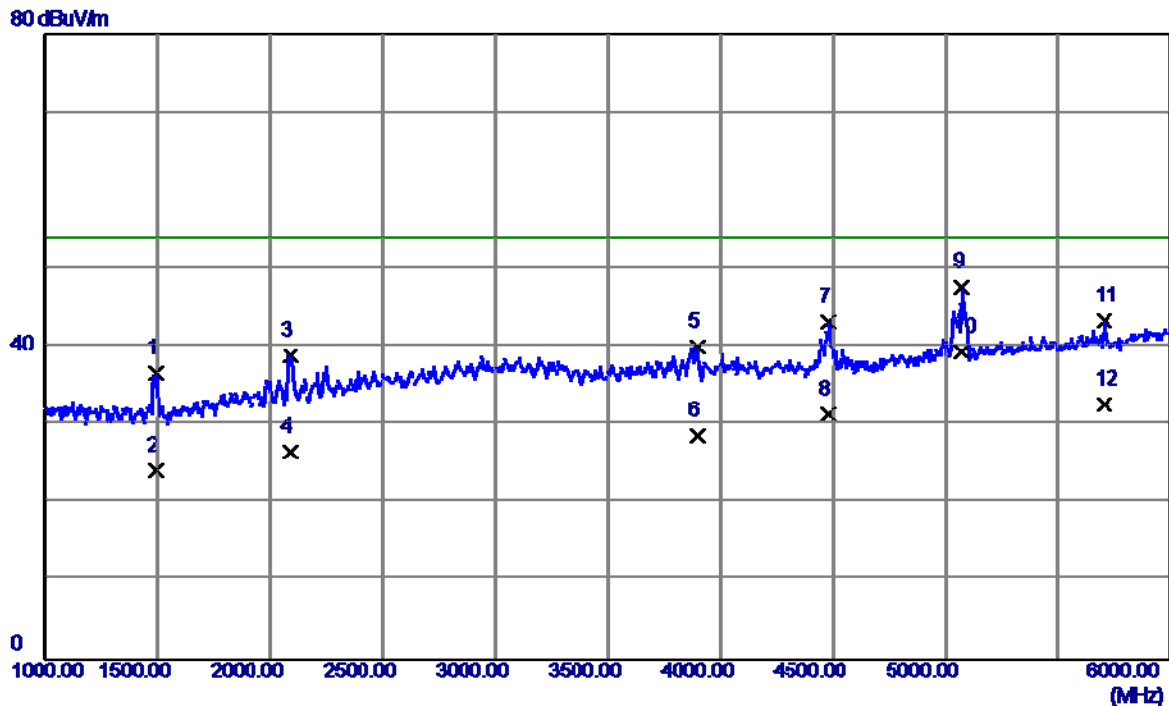

| No.  | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector |
|------|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|
| 1    | 1495.0000    | 43.27                      | -6.66                   | 36.61                     | 74.00           | -37.39       | Peak     |
| 2    | 1495.0000    | 30.76                      | -6.66                   | 24.10                     | 54.00           | -29.90       | AVG      |
| 3    | 2090.0000    | 41.44                      | -2.49                   | 38.95                     | 74.00           | -35.05       | Peak     |
| 4    | 2090.0000    | 28.99                      | -2.49                   | 26.50                     | 54.00           | -27.50       | AVG      |
| 5    | 3900.0000    | 37.43                      | 2.62                    | 40.05                     | 74.00           | -33.95       | Peak     |
| 6    | 3900.0000    | 26.08                      | 2.62                    | 28.70                     | 54.00           | -25.30       | AVG      |
| 7    | 4480.0000    | 39.68                      | 3.46                    | 43.14                     | 74.00           | -30.86       | Peak     |
| 8    | 4480.0000    | 27.94                      | 3.46                    | 31.40                     | 54.00           | -22.60       | AVG      |
| 9    | 5075.0000    | 41.91                      | 5.84                    | 47.75                     | 74.00           | -26.25       | Peak     |
| 10 * | 5075.0000    | 33.46                      | 5.84                    | 39.30                     | 54.00           | -14.70       | AVG      |
| 11   | 5705.0000    | 35.39                      | 7.95                    | 43.34                     | 74.00           | -30.66       | Peak     |
| 12   | 5705.0000    | 24.65                      | 7.95                    | 32.60                     | 54.00           | -21.40       | AVG      |

|               |                                                    |                   |          |
|---------------|----------------------------------------------------|-------------------|----------|
| EUT           | HUAWEI MediaPad T2 7.0 (MediaPad T2 7.0 for short) | Model Name        | BGO-L03  |
| Temperature   | 25°C                                               | Relative Humidity | 60%      |
| Test Voltage  | AC 120V/60Hz                                       | Polarization      | Vertical |
| Test Mode     | USB copy(EUT with PC)+idle                         |                   |          |
| Note          | USB Cable:HONGLIN                                  |                   |          |
| Test Engineer | Lucky Mao                                          |                   |          |


80 dBuV/m

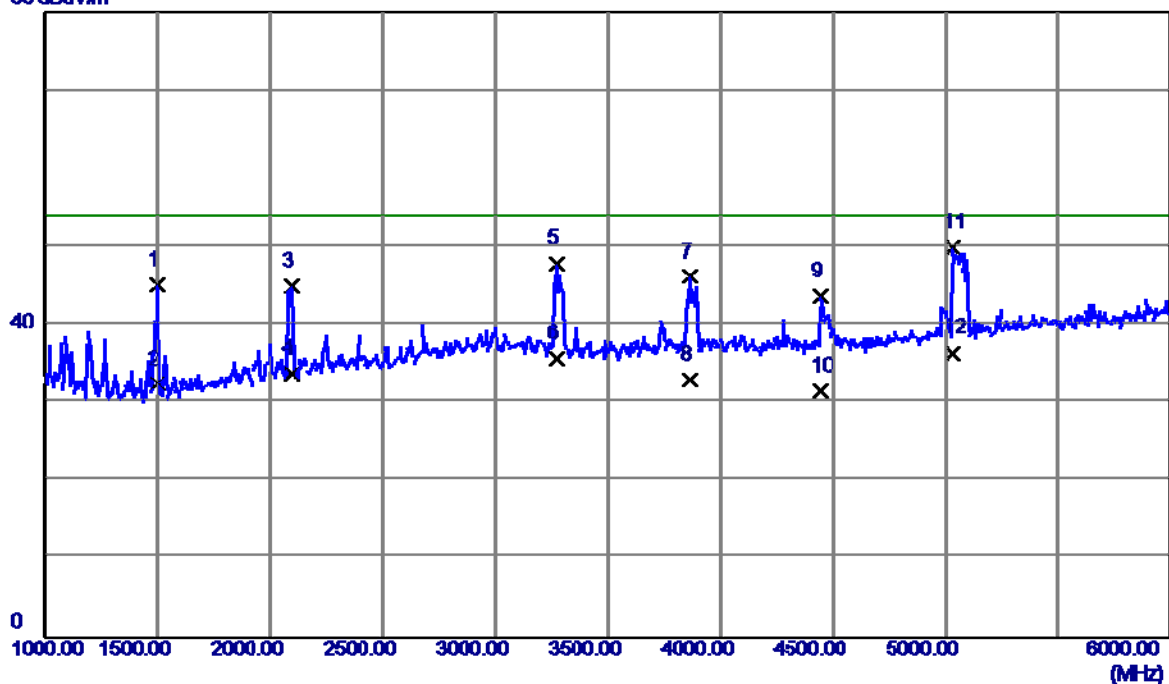

| No.  | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector |
|------|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|
| 1    | 1500.0000    | 51.83                      | -6.65                   | 45.18                     | 74.00           | -28.82       | Peak     |
| 2    | 1500.0000    | 39.05                      | -6.65                   | 32.40                     | 54.00           | -21.60       | AVG      |
| 3    | 2095.0000    | 47.38                      | -2.47                   | 44.91                     | 74.00           | -29.09       | Peak     |
| 4    | 2095.0000    | 36.27                      | -2.47                   | 33.80                     | 54.00           | -20.20       | AVG      |
| 5    | 3270.0000    | 46.47                      | 1.41                    | 47.88                     | 74.00           | -26.12       | Peak     |
| 6    | 3270.0000    | 34.29                      | 1.41                    | 35.70                     | 54.00           | -18.30       | AVG      |
| 7    | 3865.0000    | 43.65                      | 2.51                    | 46.16                     | 74.00           | -27.84       | Peak     |
| 8    | 3865.0000    | 30.39                      | 2.51                    | 32.90                     | 54.00           | -21.10       | AVG      |
| 9    | 4445.0000    | 40.32                      | 3.42                    | 43.74                     | 74.00           | -30.26       | Peak     |
| 10   | 4445.0000    | 28.08                      | 3.42                    | 31.50                     | 54.00           | -22.50       | AVG      |
| 11   | 5035.0000    | 44.13                      | 5.71                    | 49.84                     | 74.00           | -24.16       | Peak     |
| 12 * | 5035.0000    | 30.69                      | 5.71                    | 36.40                     | 54.00           | -17.60       | AVG      |

|               |                                                    |                   |            |
|---------------|----------------------------------------------------|-------------------|------------|
| EUT           | HUAWEI MediaPad T2 7.0 (MediaPad T2 7.0 for short) | Model Name        | BGO-L03    |
| Temperature   | 25°C                                               | Relative Humidity | 60%        |
| Test Voltage  | AC 120V/60Hz                                       | Polarization      | Horizontal |
| Test Mode     | USB copy(EUT with PC)+idle                         |                   |            |
| Note          | USB Cable:HONGLIN                                  |                   |            |
| Test Engineer | Lucky Mao                                          |                   |            |


80 dBuV/m

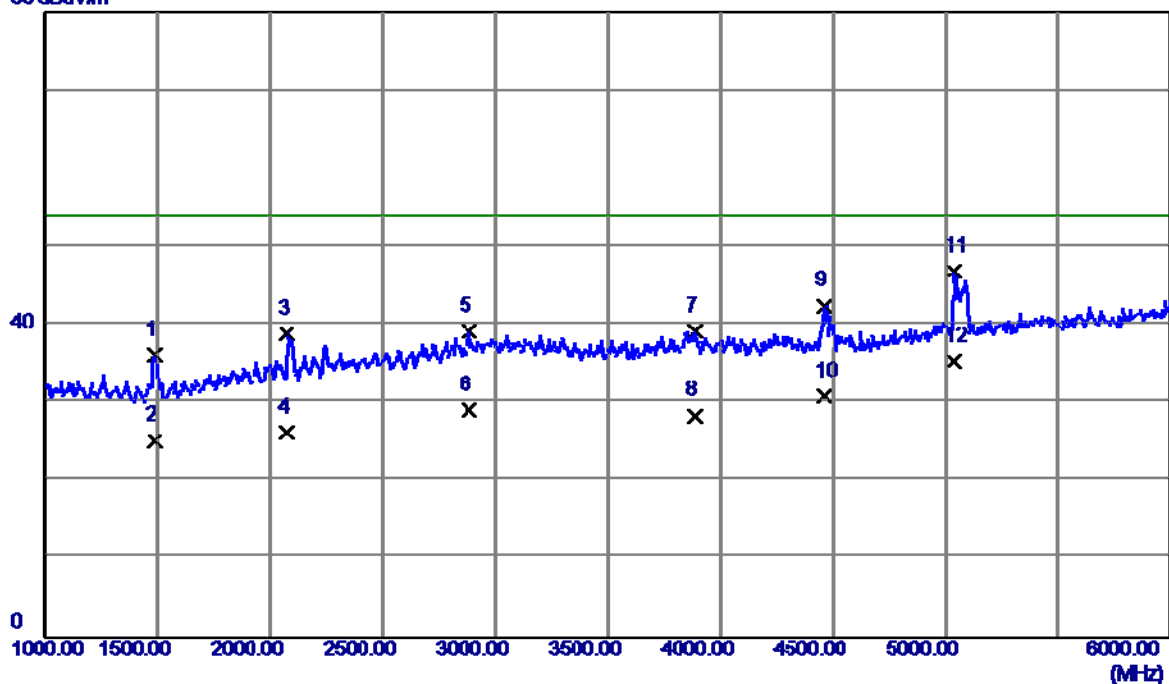

| No.  | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector |
|------|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|
| 1    | 1490.0000    | 42.82                      | -6.68                   | 36.14                     | 74.00           | -37.86       | Peak     |
| 2    | 1490.0000    | 31.88                      | -6.68                   | 25.20                     | 54.00           | -28.80       | AVG      |
| 3    | 2075.0000    | 41.48                      | -2.54                   | 38.94                     | 74.00           | -35.06       | Peak     |
| 4    | 2075.0000    | 28.84                      | -2.54                   | 26.30                     | 54.00           | -27.70       | AVG      |
| 5    | 2885.0000    | 38.22                      | 0.95                    | 39.17                     | 74.00           | -34.83       | Peak     |
| 6    | 2885.0000    | 28.15                      | 0.95                    | 29.10                     | 54.00           | -24.90       | AVG      |
| 7    | 3890.0000    | 36.62                      | 2.59                    | 39.21                     | 74.00           | -34.79       | Peak     |
| 8    | 3890.0000    | 25.81                      | 2.59                    | 28.40                     | 54.00           | -25.60       | AVG      |
| 9    | 4460.0000    | 39.04                      | 3.44                    | 42.48                     | 74.00           | -31.52       | Peak     |
| 10   | 4460.0000    | 27.46                      | 3.44                    | 30.90                     | 54.00           | -23.10       | AVG      |
| 11   | 5040.0000    | 41.11                      | 5.73                    | 46.84                     | 74.00           | -27.16       | Peak     |
| 12 * | 5040.0000    | 29.67                      | 5.73                    | 35.40                     | 54.00           | -18.60       | AVG      |


|               |                                                    |                   |          |
|---------------|----------------------------------------------------|-------------------|----------|
| EUT           | HUAWEI MediaPad T2 7.0 (MediaPad T2 7.0 for short) | Model Name        | BGO-L03  |
| Temperature   | 25°C                                               | Relative Humidity | 60%      |
| Test Voltage  | AC 120V/60Hz                                       | Polarization      | Vertical |
| Test Mode     | USB copy(EUT with PC)+idle                         |                   |          |
| Note          | USB Cable:Luxshare                                 |                   |          |
| Test Engineer | Lucky Mao                                          |                   |          |

80 dBuV/m

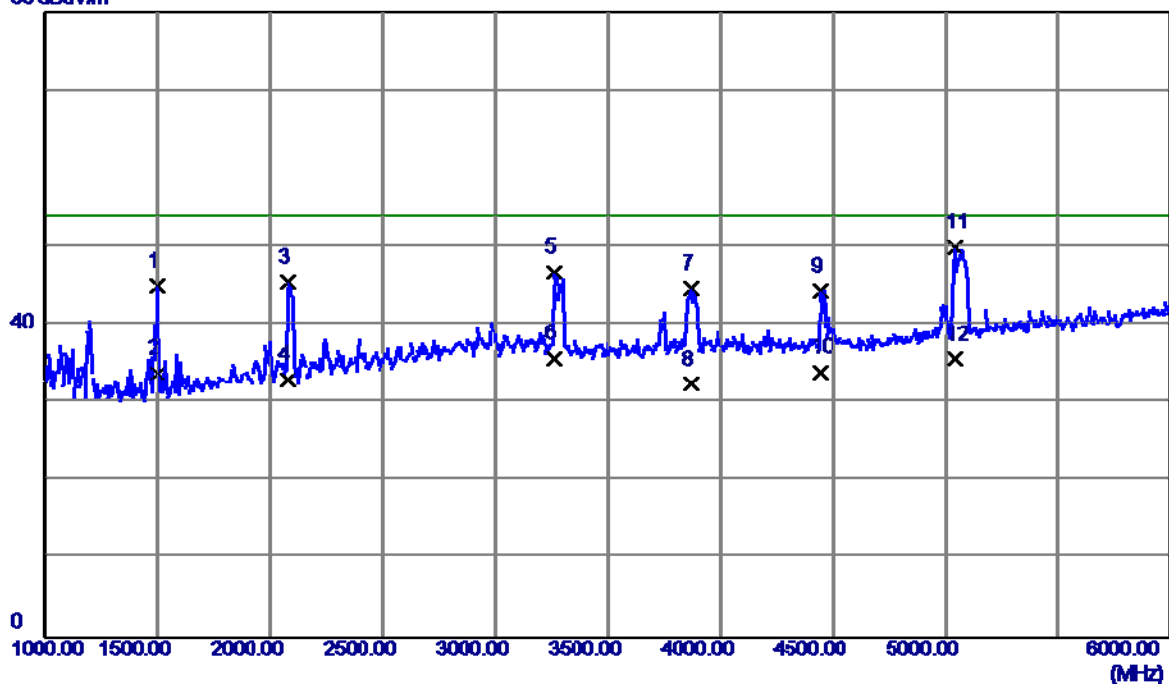


| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|
| 1   | 1500.0000    | 51.62                      | -6.65                   | 44.97                     | 74.00           | -29.03       | Peak     |
| 2   | 1500.0000    | 40.45                      | -6.65                   | 33.80                     | 54.00           | -20.20       | AVG      |
| 3   | 2080.0000    | 47.91                      | -2.52                   | 45.39                     | 74.00           | -28.61       | Peak     |
| 4   | 2080.0000    | 35.42                      | -2.52                   | 32.90                     | 54.00           | -21.10       | AVG      |
| 5   | 3260.0000    | 45.33                      | 1.42                    | 46.75                     | 74.00           | -27.25       | Peak     |
| 6 * | 3260.0000    | 34.28                      | 1.42                    | 35.70                     | 54.00           | -18.30       | AVG      |
| 7   | 3870.0000    | 42.16                      | 2.52                    | 44.68                     | 74.00           | -29.32       | Peak     |
| 8   | 3870.0000    | 29.88                      | 2.52                    | 32.40                     | 54.00           | -21.60       | AVG      |
| 9   | 4445.0000    | 40.84                      | 3.42                    | 44.26                     | 74.00           | -29.74       | Peak     |
| 10  | 4445.0000    | 30.48                      | 3.42                    | 33.90                     | 54.00           | -20.10       | AVG      |
| 11  | 5045.0000    | 44.18                      | 5.75                    | 49.93                     | 74.00           | -24.07       | Peak     |
| 12  | 5045.0000    | 29.85                      | 5.75                    | 35.60                     | 54.00           | -18.40       | AVG      |

|               |                                                    |                   |            |
|---------------|----------------------------------------------------|-------------------|------------|
| EUT           | HUAWEI MediaPad T2 7.0 (MediaPad T2 7.0 for short) | Model Name        | BGO-L03    |
| Temperature   | 25°C                                               | Relative Humidity | 60%        |
| Test Voltage  | AC 120V/60Hz                                       | Polarization      | Horizontal |
| Test Mode     | USB copy(EUT with PC)+idle                         |                   |            |
| Note          | USB Cable:Luxshare                                 |                   |            |
| Test Engineer | Lucky Mao                                          |                   |            |

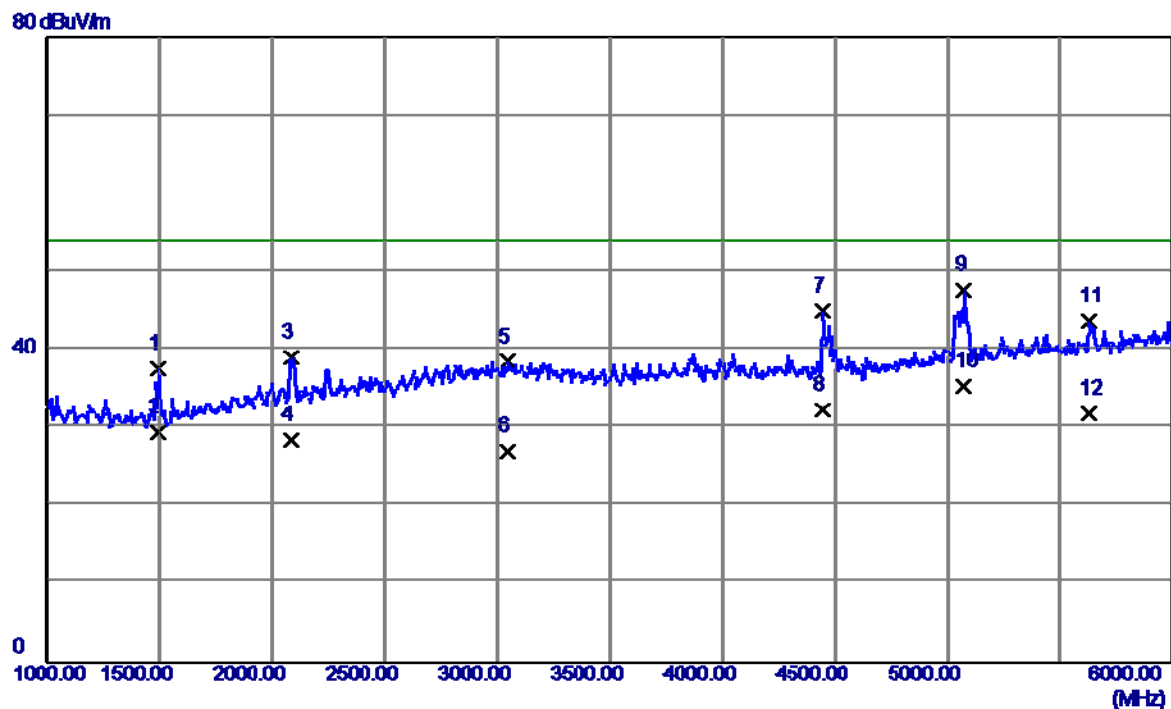


| No.  | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector |
|------|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|
| 1    | 1495.0000    | 44.22                      | -6.66                   | 37.56                     | 74.00           | -36.44       | Peak     |
| 2    | 1495.0000    | 36.06                      | -6.66                   | 29.40                     | 54.00           | -24.60       | AVG      |
| 3    | 2085.0000    | 41.57                      | -2.51                   | 39.06                     | 74.00           | -34.94       | Peak     |
| 4    | 2085.0000    | 31.01                      | -2.51                   | 28.50                     | 54.00           | -25.50       | AVG      |
| 5    | 3045.0000    | 36.97                      | 1.51                    | 38.48                     | 74.00           | -35.52       | Peak     |
| 6    | 3045.0000    | 25.59                      | 1.51                    | 27.10                     | 54.00           | -26.90       | AVG      |
| 7    | 4445.0000    | 41.52                      | 3.42                    | 44.94                     | 74.00           | -29.06       | Peak     |
| 8    | 4445.0000    | 28.88                      | 3.42                    | 32.30                     | 54.00           | -21.70       | AVG      |
| 9    | 5075.0000    | 41.83                      | 5.84                    | 47.67                     | 74.00           | -26.33       | Peak     |
| 10 * | 5075.0000    | 29.56                      | 5.84                    | 35.40                     | 54.00           | -18.60       | AVG      |
| 11   | 5630.0000    | 36.03                      | 7.69                    | 43.72                     | 74.00           | -30.28       | Peak     |
| 12   | 5630.0000    | 24.21                      | 7.69                    | 31.90                     | 54.00           | -22.10       | AVG      |

|               |                                                    |                   |          |
|---------------|----------------------------------------------------|-------------------|----------|
| EUT           | HUAWEI MediaPad T2 7.0 (MediaPad T2 7.0 for short) | Model Name        | BGO-L03  |
| Temperature   | 25°C                                               | Relative Humidity | 60%      |
| Test Voltage  | AC 120V/60Hz                                       | Polarization      | Vertical |
| Test Mode     | Adapter+WIFI+BT+GPS+Camera On                      |                   |          |
| Note          | USB Cable:Luxshare+Adapter:BYD                     |                   |          |
| Test Engineer | Lucky Mao                                          |                   |          |

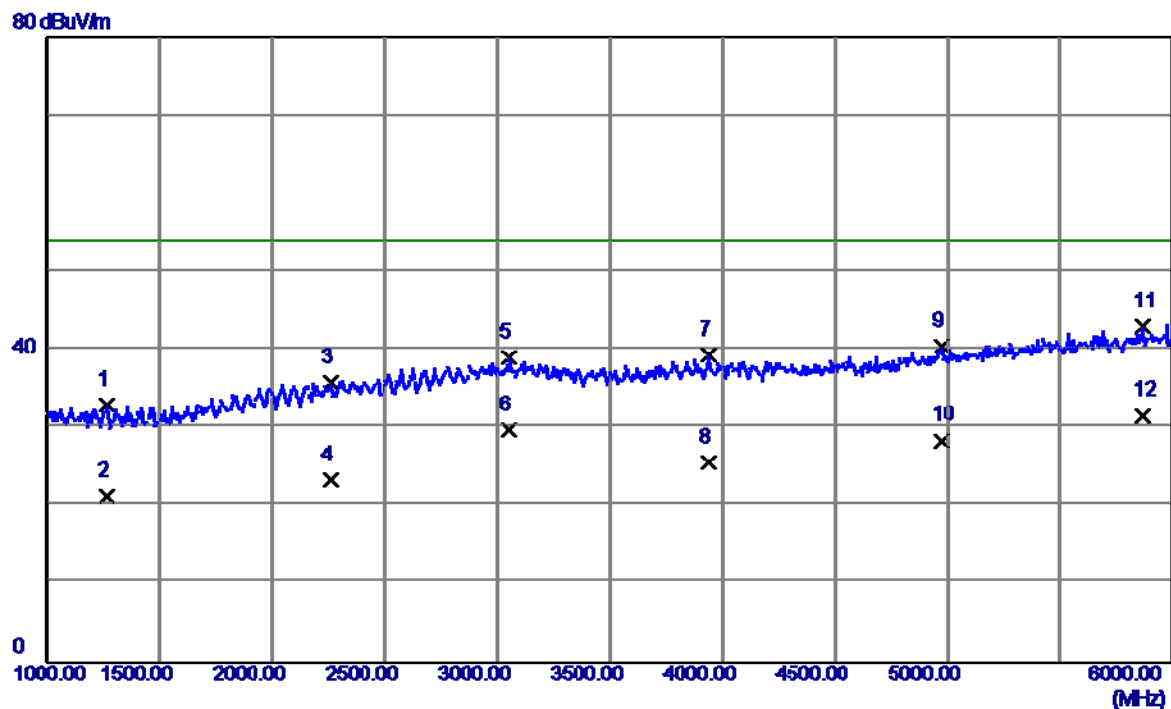


| No.  | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector |
|------|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|
| 1    | 1265.0000    | 40.27                      | -7.25                   | 33.02                     | 74.00           | -40.98       | Peak     |
| 2    | 1265.0000    | 28.55                      | -7.25                   | 21.30                     | 54.00           | -32.70       | AVG      |
| 3    | 2260.0000    | 37.69                      | -1.86                   | 35.83                     | 74.00           | -38.17       | Peak     |
| 4    | 2260.0000    | 25.26                      | -1.86                   | 23.40                     | 54.00           | -30.60       | AVG      |
| 5    | 3050.0000    | 37.57                      | 1.51                    | 39.08                     | 74.00           | -34.92       | Peak     |
| 6    | 3050.0000    | 28.29                      | 1.51                    | 29.80                     | 54.00           | -24.20       | AVG      |
| 7    | 3940.0000    | 36.55                      | 2.75                    | 39.30                     | 74.00           | -34.70       | Peak     |
| 8    | 3940.0000    | 22.85                      | 2.75                    | 25.60                     | 54.00           | -28.40       | AVG      |
| 9    | 4970.0000    | 35.03                      | 5.47                    | 40.50                     | 74.00           | -33.50       | Peak     |
| 10   | 4970.0000    | 22.93                      | 5.47                    | 28.40                     | 54.00           | -25.60       | AVG      |
| 11   | 5865.0000    | 34.60                      | 8.51                    | 43.11                     | 74.00           | -30.89       | Peak     |
| 12 * | 5865.0000    | 23.09                      | 8.51                    | 31.60                     | 54.00           | -22.40       | AVG      |

|               |                                                    |                   |            |
|---------------|----------------------------------------------------|-------------------|------------|
| EUT           | HUAWEI MediaPad T2 7.0 (MediaPad T2 7.0 for short) | Model Name        | BGO-L03    |
| Temperature   | 25°C                                               | Relative Humidity | 60%        |
| Test Voltage  | AC 120V/60Hz                                       | Polarization      | Horizontal |
| Test Mode     | Adapter+WIFI+BT+GPS+Camera On                      |                   |            |
| Note          | USB Cable:Luxshare+Adapter:BYD                     |                   |            |
| Test Engineer | Lucky Mao                                          |                   |            |

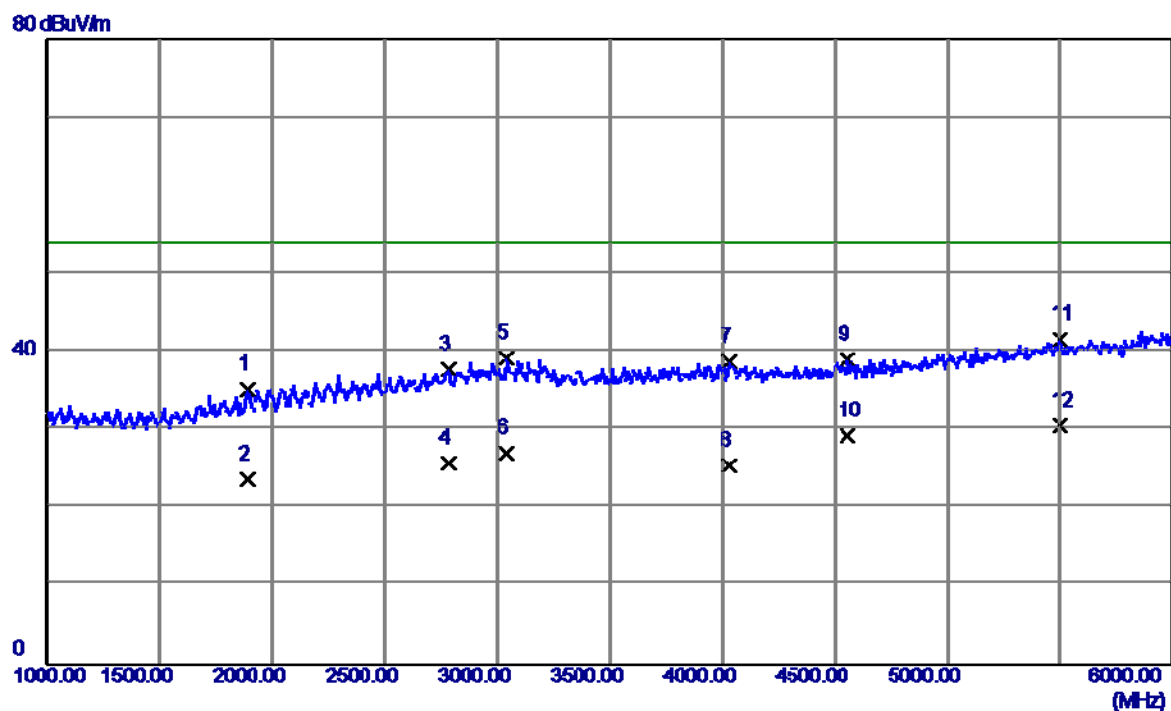


| No.  | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector |
|------|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|
| 1    | 1890.0000    | 38.83                      | -3.66                   | 35.17                     | 74.00           | -38.83       | Peak     |
| 2    | 1890.0000    | 27.36                      | -3.66                   | 23.70                     | 54.00           | -30.30       | AVG      |
| 3    | 2785.0000    | 37.26                      | 0.45                    | 37.71                     | 74.00           | -36.29       | Peak     |
| 4    | 2785.0000    | 25.35                      | 0.45                    | 25.80                     | 54.00           | -28.20       | AVG      |
| 5    | 3040.0000    | 37.75                      | 1.51                    | 39.26                     | 74.00           | -34.74       | Peak     |
| 6    | 3040.0000    | 25.59                      | 1.51                    | 27.10                     | 54.00           | -26.90       | AVG      |
| 7    | 4030.0000    | 35.73                      | 2.98                    | 38.71                     | 74.00           | -35.29       | Peak     |
| 8    | 4030.0000    | 22.42                      | 2.98                    | 25.40                     | 54.00           | -28.60       | AVG      |
| 9    | 4555.0000    | 35.36                      | 3.71                    | 39.07                     | 74.00           | -34.93       | Peak     |
| 10   | 4555.0000    | 25.59                      | 3.71                    | 29.30                     | 54.00           | -24.70       | AVG      |
| 11   | 5500.0000    | 34.34                      | 7.23                    | 41.57                     | 74.00           | -32.43       | Peak     |
| 12 * | 5500.0000    | 23.37                      | 7.23                    | 30.60                     | 54.00           | -23.40       | AVG      |

|               |                                                    |                   |          |
|---------------|----------------------------------------------------|-------------------|----------|
| EUT           | HUAWEI MediaPad T2 7.0 (MediaPad T2 7.0 for short) | Model Name        | BGO-L03  |
| Temperature   | 25°C                                               | Relative Humidity | 60%      |
| Test Voltage  | AC 120V/60Hz                                       | Polarization      | Vertical |
| Test Mode     | Adapter+WIFI+BT+GPS+Camera On                      |                   |          |
| Note          | USB Cable:Luxshare+Adapter:Huntkey                 |                   |          |
| Test Engineer | Lucky Mao                                          |                   |          |

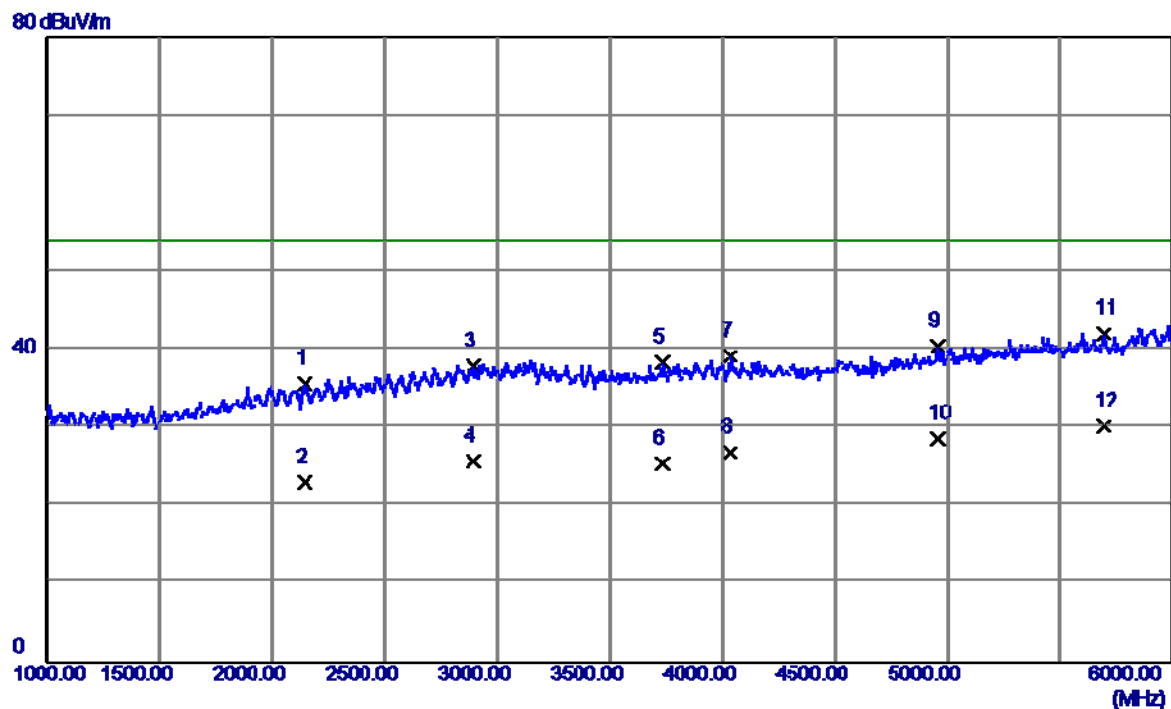


| No.  | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector |
|------|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|
| 1    | 2145.0000    | 38.01                      | -2.28                   | 35.73                     | 74.00           | -38.27       | Peak     |
| 2    | 2145.0000    | 25.38                      | -2.28                   | 23.10                     | 54.00           | -30.90       | AVG      |
| 3    | 2895.0000    | 36.94                      | 1.00                    | 37.94                     | 74.00           | -36.06       | Peak     |
| 4    | 2895.0000    | 24.80                      | 1.00                    | 25.80                     | 54.00           | -28.20       | AVG      |
| 5    | 3735.0000    | 36.34                      | 2.08                    | 38.42                     | 74.00           | -35.58       | Peak     |
| 6    | 3735.0000    | 23.32                      | 2.08                    | 25.40                     | 54.00           | -28.60       | AVG      |
| 7    | 4035.0000    | 36.19                      | 2.99                    | 39.18                     | 74.00           | -34.82       | Peak     |
| 8    | 4035.0000    | 23.91                      | 2.99                    | 26.90                     | 54.00           | -27.10       | AVG      |
| 9    | 4955.0000    | 35.02                      | 5.41                    | 40.43                     | 74.00           | -33.57       | Peak     |
| 10   | 4955.0000    | 23.29                      | 5.41                    | 28.70                     | 54.00           | -25.30       | AVG      |
| 11   | 5695.0000    | 34.14                      | 7.92                    | 42.06                     | 74.00           | -31.94       | Peak     |
| 12 * | 5695.0000    | 22.28                      | 7.92                    | 30.20                     | 54.00           | -23.80       | AVG      |

|               |                                                    |                   |            |
|---------------|----------------------------------------------------|-------------------|------------|
| EUT           | HUAWEI MediaPad T2 7.0 (MediaPad T2 7.0 for short) | Model Name        | BGO-L03    |
| Temperature   | 25°C                                               | Relative Humidity | 60%        |
| Test Voltage  | AC 120V/60Hz                                       | Polarization      | Horizontal |
| Test Mode     | Adapter+WIFI+BT+GPS+Camera On                      |                   |            |
| Note          | USB Cable:Luxshare+Adapter:Huntkey                 |                   |            |
| Test Engineer | Lucky Mao                                          |                   |            |

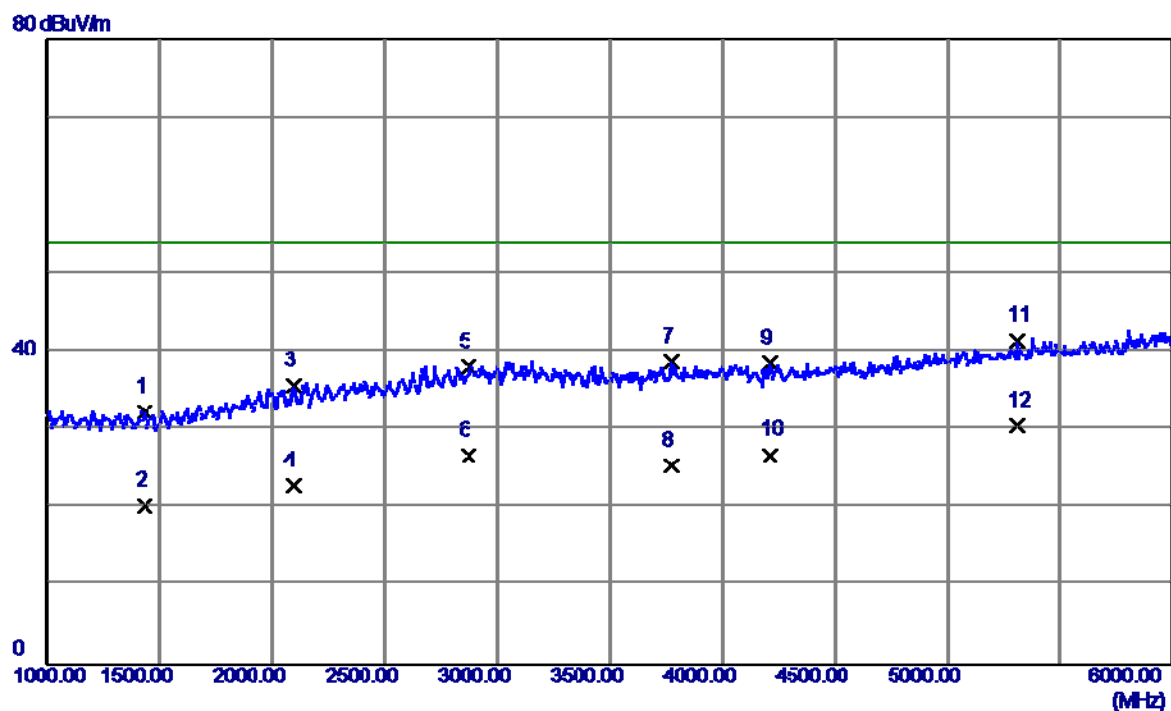


| No.  | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector |
|------|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|
| 1    | 1435.0000    | 39.19                      | -6.82                   | 32.37                     | 74.00           | -41.63       | Peak     |
| 2    | 1435.0000    | 27.12                      | -6.82                   | 20.30                     | 54.00           | -33.70       | AVG      |
| 3    | 2095.0000    | 38.13                      | -2.47                   | 35.66                     | 74.00           | -38.34       | Peak     |
| 4    | 2095.0000    | 25.37                      | -2.47                   | 22.90                     | 54.00           | -31.10       | AVG      |
| 5    | 2870.0000    | 37.18                      | 0.88                    | 38.06                     | 74.00           | -35.94       | Peak     |
| 6    | 2870.0000    | 25.82                      | 0.88                    | 26.70                     | 54.00           | -27.30       | AVG      |
| 7    | 3770.0000    | 36.58                      | 2.20                    | 38.78                     | 74.00           | -35.22       | Peak     |
| 8    | 3770.0000    | 23.20                      | 2.20                    | 25.40                     | 54.00           | -28.60       | AVG      |
| 9    | 4210.0000    | 35.39                      | 3.17                    | 38.56                     | 74.00           | -35.44       | Peak     |
| 10   | 4210.0000    | 23.63                      | 3.17                    | 26.80                     | 54.00           | -27.20       | AVG      |
| 11   | 5310.0000    | 34.90                      | 6.61                    | 41.51                     | 74.00           | -32.49       | Peak     |
| 12 * | 5310.0000    | 23.89                      | 6.61                    | 30.50                     | 54.00           | -23.50       | AVG      |

|               |                                                    |                   |          |
|---------------|----------------------------------------------------|-------------------|----------|
| EUT           | HUAWEI MediaPad T2 7.0 (MediaPad T2 7.0 for short) | Model Name        | BGO-L03  |
| Temperature   | 25°C                                               | Relative Humidity | 60%      |
| Test Voltage  | AC 120V/60Hz                                       | Polarization      | Vertical |
| Test Mode     | Adapter+WIFI+BT+GPS+Camera On                      |                   |          |
| Note          | USB Cable:Luxshare+Adapter:Phitek                  |                   |          |
| Test Engineer | Lucky Mao                                          |                   |          |

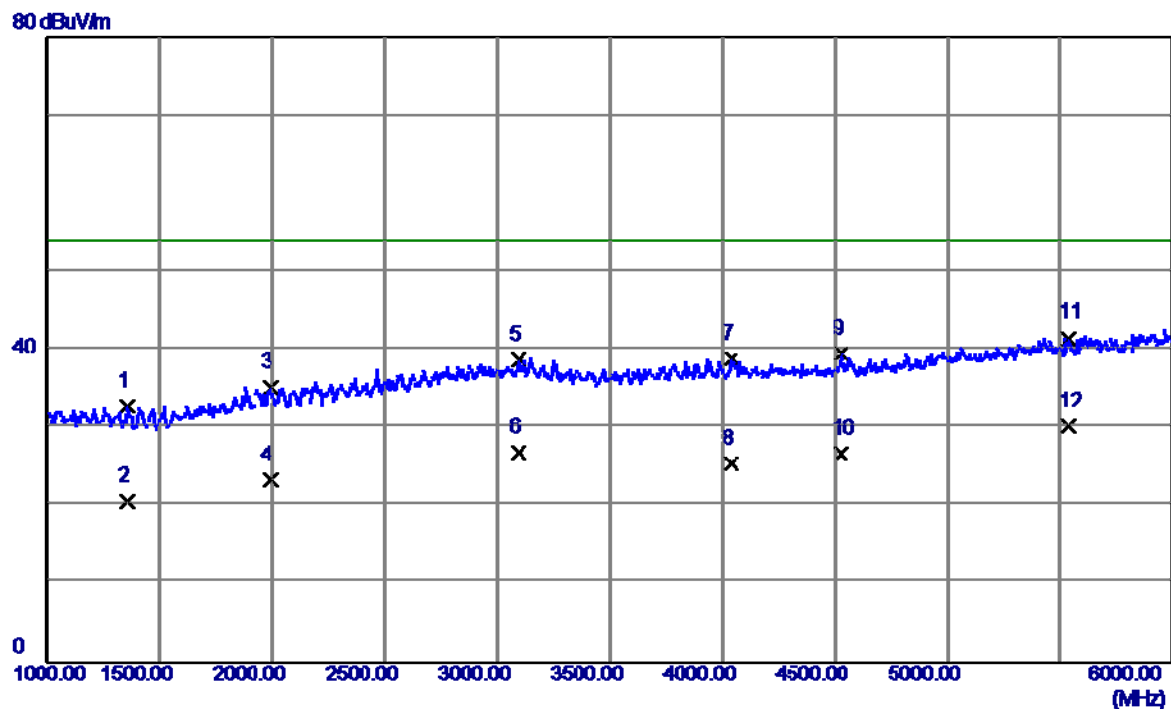


| No.  | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector |
|------|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|
| 1    | 1355.0000    | 39.85                      | -7.02                   | 32.83                     | 74.00           | -41.17       | Peak     |
| 2    | 1355.0000    | 27.72                      | -7.02                   | 20.70                     | 54.00           | -33.30       | AVG      |
| 3    | 1995.0000    | 38.00                      | -2.86                   | 35.14                     | 74.00           | -38.86       | Peak     |
| 4    | 1995.0000    | 26.16                      | -2.86                   | 23.30                     | 54.00           | -30.70       | AVG      |
| 5    | 3095.0000    | 37.27                      | 1.49                    | 38.76                     | 74.00           | -35.24       | Peak     |
| 6    | 3095.0000    | 25.41                      | 1.49                    | 26.90                     | 54.00           | -27.10       | AVG      |
| 7    | 4040.0000    | 35.87                      | 2.99                    | 38.86                     | 74.00           | -35.14       | Peak     |
| 8    | 4040.0000    | 22.41                      | 2.99                    | 25.40                     | 54.00           | -28.60       | AVG      |
| 9    | 4530.0000    | 35.92                      | 3.61                    | 39.53                     | 74.00           | -34.47       | Peak     |
| 10   | 4530.0000    | 23.09                      | 3.61                    | 26.70                     | 54.00           | -27.30       | AVG      |
| 11   | 5540.0000    | 34.15                      | 7.37                    | 41.52                     | 74.00           | -32.48       | Peak     |
| 12 * | 5540.0000    | 22.83                      | 7.37                    | 30.20                     | 54.00           | -23.80       | AVG      |

|               |                                                    |                   |            |
|---------------|----------------------------------------------------|-------------------|------------|
| EUT           | HUAWEI MediaPad T2 7.0 (MediaPad T2 7.0 for short) | Model Name        | BGO-L03    |
| Temperature   | 25°C                                               | Relative Humidity | 60%        |
| Test Voltage  | AC 120V/60Hz                                       | Polarization      | Horizontal |
| Test Mode     | Adapter+WIFI+BT+GPS+Camera On                      |                   |            |
| Note          | USB Cable:Luxshare+Adapter:Phitek                  |                   |            |
| Test Engineer | Lucky Mao                                          |                   |            |

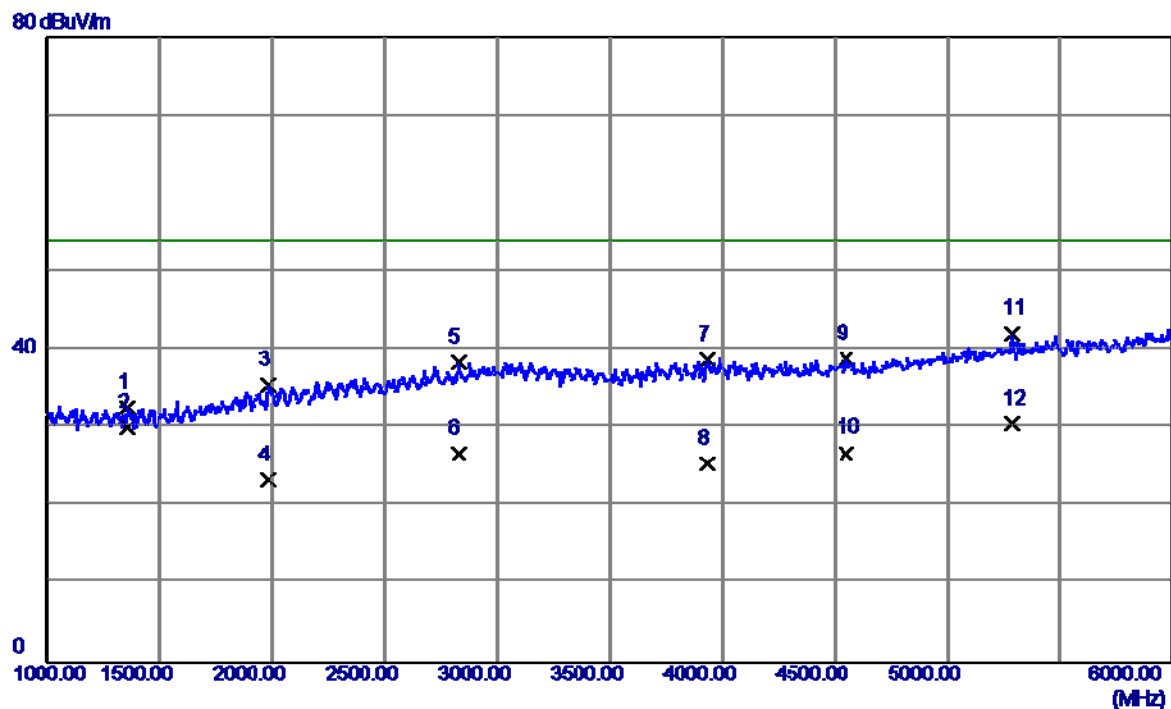


| No.  | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector |
|------|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|
| 1    | 1355.0000    | 39.71                      | -7.02                   | 32.69                     | 74.00           | -41.31       | Peak     |
| 2    | 1355.0000    | 37.12                      | -7.02                   | 30.10                     | 54.00           | -23.90       | AVG      |
| 3    | 1985.0000    | 38.51                      | -2.93                   | 35.58                     | 74.00           | -38.42       | Peak     |
| 4    | 1985.0000    | 26.23                      | -2.93                   | 23.30                     | 54.00           | -30.70       | AVG      |
| 5    | 2825.0000    | 37.70                      | 0.65                    | 38.35                     | 74.00           | -35.65       | Peak     |
| 6    | 2825.0000    | 26.05                      | 0.65                    | 26.70                     | 54.00           | -27.30       | AVG      |
| 7    | 3935.0000    | 35.96                      | 2.74                    | 38.70                     | 74.00           | -35.30       | Peak     |
| 8    | 3935.0000    | 22.66                      | 2.74                    | 25.40                     | 54.00           | -28.60       | AVG      |
| 9    | 4550.0000    | 35.19                      | 3.69                    | 38.88                     | 74.00           | -35.12       | Peak     |
| 10   | 4550.0000    | 23.11                      | 3.69                    | 26.80                     | 54.00           | -27.20       | AVG      |
| 11   | 5290.0000    | 35.50                      | 6.55                    | 42.05                     | 74.00           | -31.95       | Peak     |
| 12 * | 5290.0000    | 24.05                      | 6.55                    | 30.60                     | 54.00           | -23.40       | AVG      |

|               |                                                    |                   |          |
|---------------|----------------------------------------------------|-------------------|----------|
| EUT           | HUAWEI MediaPad T2 7.0 (MediaPad T2 7.0 for short) | Model Name        | BGO-L03  |
| Temperature   | 25°C                                               | Relative Humidity | 60%      |
| Test Voltage  | AC 120V/60Hz                                       | Polarization      | Vertical |
| Test Mode     | Adapter+WIFI+BT+GPS+Camera On                      |                   |          |
| Note          | USB Cable:Luxshare+Adapter:Huntkey                 |                   |          |
| Test Engineer | Lucky Mao                                          |                   |          |

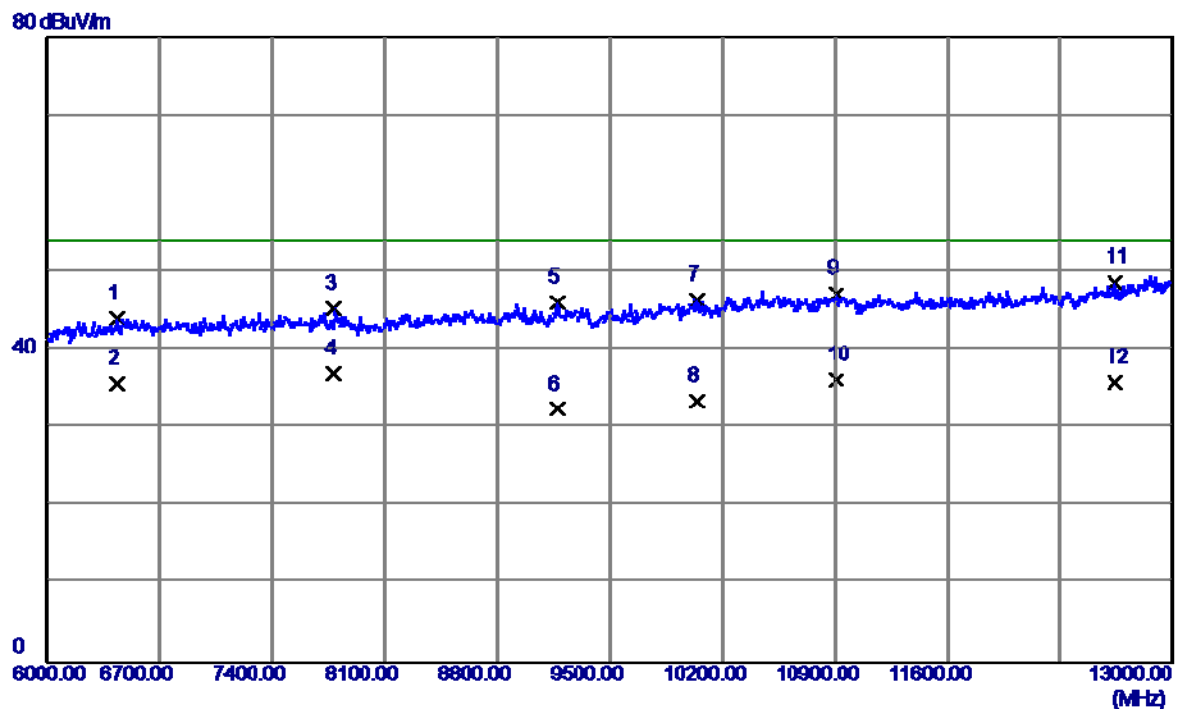


| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|
| 1   | 6434.0000    | 33.35                      | 10.65                   | 44.00                     | 74.00           | -30.00       | Peak     |
| 2   | 6434.0000    | 25.05                      | 10.65                   | 35.70                     | 54.00           | -18.30       | AVG      |
| 3   | 7785.0000    | 33.50                      | 11.73                   | 45.23                     | 74.00           | -28.77       | Peak     |
| 4 * | 7785.0000    | 25.17                      | 11.73                   | 36.90                     | 54.00           | -17.10       | AVG      |
| 5   | 9171.0000    | 32.73                      | 13.32                   | 46.05                     | 74.00           | -27.95       | Peak     |
| 6   | 9171.0000    | 19.08                      | 13.32                   | 32.40                     | 54.00           | -21.60       | AVG      |
| 7   | 10046.0000   | 32.17                      | 14.23                   | 46.40                     | 74.00           | -27.60       | Peak     |
| 8   | 10046.0000   | 19.17                      | 14.23                   | 33.40                     | 54.00           | -20.60       | AVG      |
| 9   | 10907.0000   | 31.34                      | 15.81                   | 47.15                     | 74.00           | -26.85       | Peak     |
| 10  | 10907.0000   | 20.39                      | 15.81                   | 36.20                     | 54.00           | -17.80       | AVG      |
| 11  | 12643.0000   | 31.73                      | 16.95                   | 48.68                     | 74.00           | -25.32       | Peak     |
| 12  | 12643.0000   | 18.85                      | 16.95                   | 35.80                     | 54.00           | -18.20       | AVG      |

|               |                                                    |                   |            |
|---------------|----------------------------------------------------|-------------------|------------|
| EUT           | HUAWEI MediaPad T2 7.0 (MediaPad T2 7.0 for short) | Model Name        | BGO-L03    |
| Temperature   | 25°C                                               | Relative Humidity | 60%        |
| Test Voltage  | AC 120V/60Hz                                       | Polarization      | Horizontal |
| Test Mode     | Adapter+WIFI+BT+GPS+Camera On                      |                   |            |
| Note          | USB Cable:Luxshare+Adapter:Huntkey                 |                   |            |
| Test Engineer | Lucky Mao                                          |                   |            |

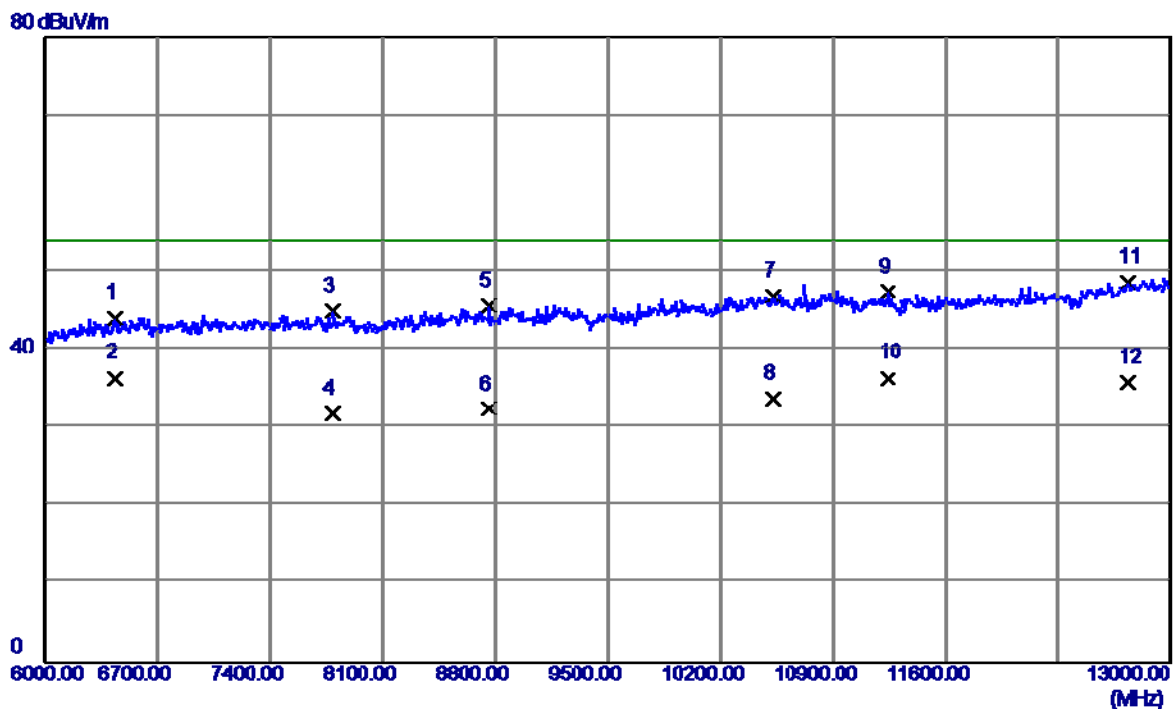


| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|
| 1   | 6434.0000    | 33.43                      | 10.65                   | 44.08                     | 74.00           | -29.92       | Peak     |
| 2 * | 6434.0000    | 25.75                      | 10.65                   | 36.40                     | 54.00           | -17.60       | AVG      |
| 3   | 7792.0000    | 33.20                      | 11.73                   | 44.93                     | 74.00           | -29.07       | Peak     |
| 4   | 7792.0000    | 20.17                      | 11.73                   | 31.90                     | 54.00           | -22.10       | AVG      |
| 5   | 8758.0000    | 32.41                      | 13.20                   | 45.61                     | 74.00           | -28.39       | Peak     |
| 6   | 8758.0000    | 19.20                      | 13.20                   | 32.40                     | 54.00           | -21.60       | AVG      |
| 7   | 10529.0000   | 31.56                      | 15.33                   | 46.89                     | 74.00           | -27.11       | Peak     |
| 8   | 10529.0000   | 18.47                      | 15.33                   | 33.80                     | 54.00           | -20.20       | AVG      |
| 9   | 11243.0000   | 31.73                      | 15.71                   | 47.44                     | 74.00           | -26.56       | Peak     |
| 10  | 11243.0000   | 20.69                      | 15.71                   | 36.40                     | 54.00           | -17.60       | AVG      |
| 11  | 12734.0000   | 31.39                      | 17.25                   | 48.64                     | 74.00           | -25.36       | Peak     |
| 12  | 12734.0000   | 18.55                      | 17.25                   | 35.80                     | 54.00           | -18.20       | AVG      |

|               |                                                    |                   |          |
|---------------|----------------------------------------------------|-------------------|----------|
| EUT           | HUAWEI MediaPad T2 7.0 (MediaPad T2 7.0 for short) | Model Name        | BGO-L03  |
| Temperature   | 25°C                                               | Relative Humidity | 60%      |
| Test Voltage  | AC 120V/60Hz                                       | Polarization      | Vertical |
| Test Mode     | Adapter+playing+speaker                            |                   |          |
| Note          | USB Cable:Luxshare+Adapter:Huntkey                 |                   |          |
| Test Engineer | Lucky Mao                                          |                   |          |

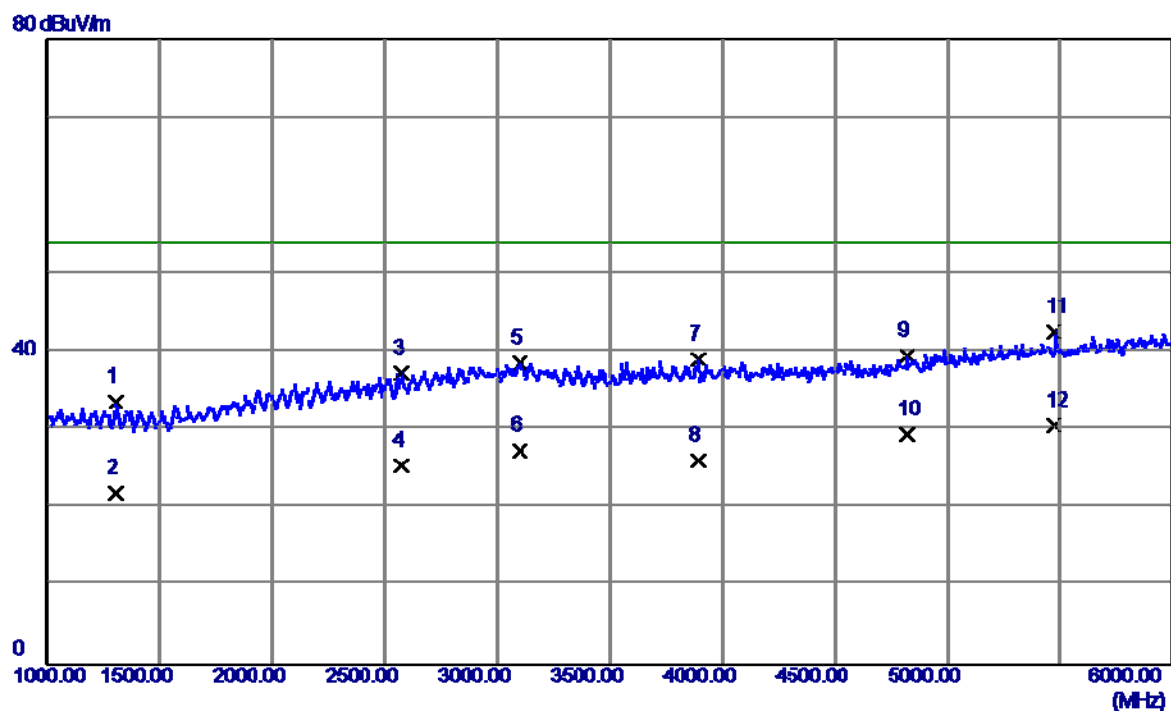


| No.  | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector |
|------|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|
| 1    | 1305.0000    | 40.71                      | -7.15                   | 33.56                     | 74.00           | -40.44       | Peak     |
| 2    | 1305.0000    | 29.05                      | -7.15                   | 21.90                     | 54.00           | -32.10       | AVG      |
| 3    | 2575.0000    | 37.86                      | -0.59                   | 37.27                     | 74.00           | -36.73       | Peak     |
| 4    | 2575.0000    | 25.99                      | -0.59                   | 25.40                     | 54.00           | -28.60       | AVG      |
| 5    | 3100.0000    | 37.03                      | 1.49                    | 38.52                     | 74.00           | -35.48       | Peak     |
| 6    | 3100.0000    | 25.81                      | 1.49                    | 27.30                     | 54.00           | -26.70       | AVG      |
| 7    | 3895.0000    | 36.38                      | 2.61                    | 38.99                     | 74.00           | -35.01       | Peak     |
| 8    | 3895.0000    | 23.49                      | 2.61                    | 26.10                     | 54.00           | -27.90       | AVG      |
| 9    | 4820.0000    | 34.70                      | 4.84                    | 39.54                     | 74.00           | -34.46       | Peak     |
| 10   | 4820.0000    | 24.66                      | 4.84                    | 29.50                     | 54.00           | -24.50       | AVG      |
| 11   | 5475.0000    | 35.34                      | 7.15                    | 42.49                     | 74.00           | -31.51       | Peak     |
| 12 * | 5475.0000    | 23.35                      | 7.15                    | 30.50                     | 54.00           | -23.50       | AVG      |

|               |                                                    |                   |            |
|---------------|----------------------------------------------------|-------------------|------------|
| EUT           | HUAWEI MediaPad T2 7.0 (MediaPad T2 7.0 for short) | Model Name        | BGO-L03    |
| Temperature   | 25°C                                               | Relative Humidity | 60%        |
| Test Voltage  | AC 120V/60Hz                                       | Polarization      | Horizontal |
| Test Mode     | Adapter+playing+speaker                            |                   |            |
| Note          | USB Cable:LuxshareAdapter:Huntkey                  |                   |            |
| Test Engineer | Lucky Mao                                          |                   |            |

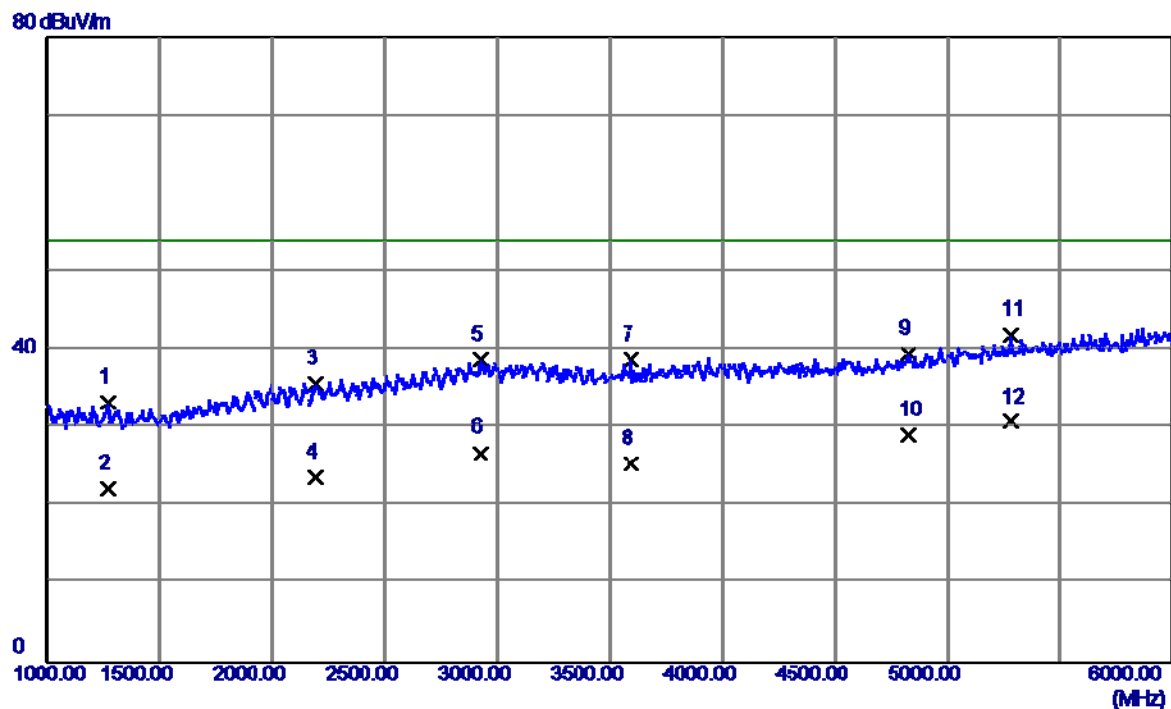


| No.  | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector |
|------|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|
| 1    | 1270.0000    | 40.47                      | -7.24                   | 33.23                     | 74.00           | -40.77       | Peak     |
| 2    | 1270.0000    | 29.44                      | -7.24                   | 22.20                     | 54.00           | -31.80       | AVG      |
| 3    | 2195.0000    | 37.78                      | -2.10                   | 35.68                     | 74.00           | -38.32       | Peak     |
| 4    | 2195.0000    | 25.80                      | -2.10                   | 23.70                     | 54.00           | -30.30       | AVG      |
| 5    | 2930.0000    | 37.55                      | 1.18                    | 38.73                     | 74.00           | -35.27       | Peak     |
| 6    | 2930.0000    | 25.62                      | 1.18                    | 26.80                     | 54.00           | -27.20       | AVG      |
| 7    | 3595.0000    | 37.03                      | 1.63                    | 38.66                     | 74.00           | -35.34       | Peak     |
| 8    | 3595.0000    | 23.77                      | 1.63                    | 25.40                     | 54.00           | -28.60       | AVG      |
| 9    | 4830.0000    | 34.71                      | 4.88                    | 39.59                     | 74.00           | -34.41       | Peak     |
| 10   | 4830.0000    | 24.22                      | 4.88                    | 29.10                     | 54.00           | -24.90       | AVG      |
| 11   | 5285.0000    | 35.44                      | 6.53                    | 41.97                     | 74.00           | -32.03       | Peak     |
| 12 * | 5285.0000    | 24.27                      | 6.53                    | 30.80                     | 54.00           | -23.20       | AVG      |

|               |                                                     |                   |          |
|---------------|-----------------------------------------------------|-------------------|----------|
| EUT           | HUAWEI MediaPad T2 7.0 (MediaPad T2 7.0 for short)  | Model Name        | BGO-L03  |
| Temperature   | 25°C                                                | Relative Humidity | 60%      |
| Test Voltage  | AC 120V/60Hz                                        | Polarization      | Vertical |
| Test Mode     | Adapter+playing+Earphone                            |                   |          |
| Note          | USB Cable:Luxshare+Adapter:Huntkey+Earphone:GoerTek |                   |          |
| Test Engineer | Lucky Mao                                           |                   |          |

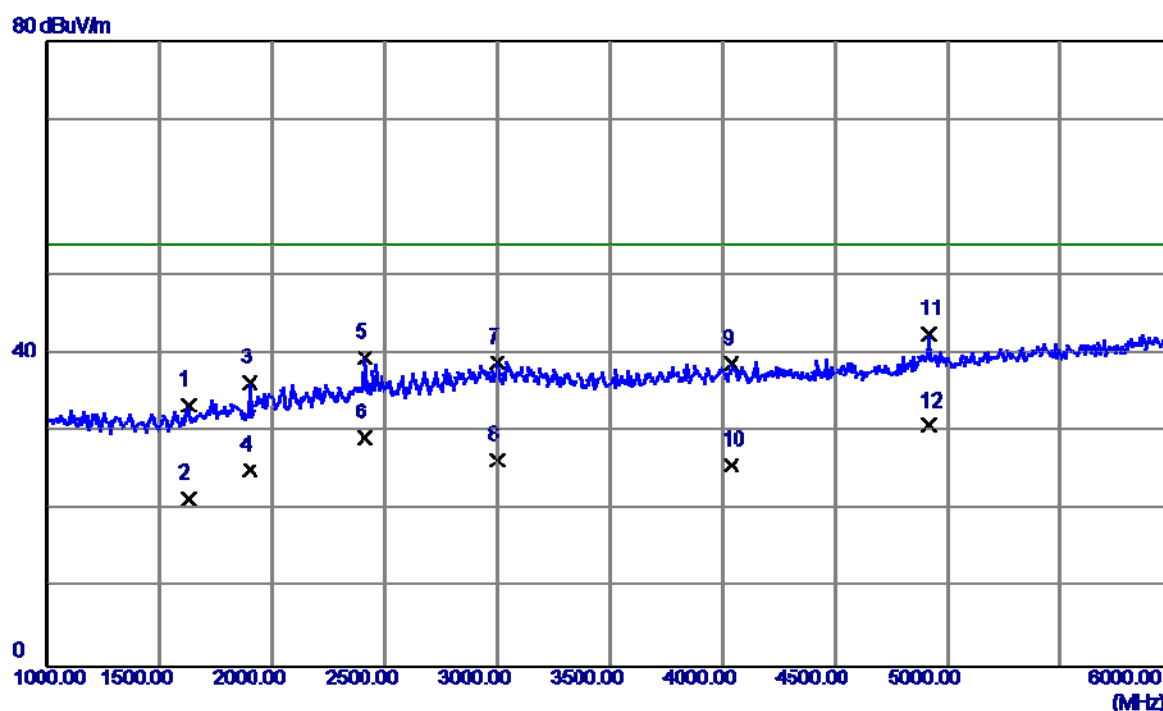


| No.  | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector |
|------|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|
| 1    | 1625.0000    | 39.06                      | -5.69                   | 33.37                     | 74.00           | -40.63       | Peak     |
| 2    | 1625.0000    | 27.09                      | -5.69                   | 21.40                     | 54.00           | -32.60       | AVG      |
| 3    | 1900.0000    | 39.94                      | -3.59                   | 36.35                     | 74.00           | -37.65       | Peak     |
| 4    | 1900.0000    | 28.69                      | -3.59                   | 25.10                     | 54.00           | -28.90       | AVG      |
| 5    | 2410.0000    | 40.84                      | -1.30                   | 39.54                     | 74.00           | -34.46       | Peak     |
| 6    | 2410.0000    | 30.60                      | -1.30                   | 29.30                     | 54.00           | -24.70       | AVG      |
| 7    | 3000.0000    | 37.41                      | 1.53                    | 38.94                     | 74.00           | -35.06       | Peak     |
| 8    | 3000.0000    | 24.87                      | 1.53                    | 26.40                     | 54.00           | -27.60       | AVG      |
| 9    | 4040.0000    | 35.68                      | 2.99                    | 38.67                     | 74.00           | -35.33       | Peak     |
| 10   | 4040.0000    | 22.71                      | 2.99                    | 25.70                     | 54.00           | -28.30       | AVG      |
| 11   | 4915.0000    | 37.25                      | 5.24                    | 42.49                     | 74.00           | -31.51       | Peak     |
| 12 * | 4915.0000    | 25.56                      | 5.24                    | 30.80                     | 54.00           | -23.20       | AVG      |

|               |                                                     |                   |            |
|---------------|-----------------------------------------------------|-------------------|------------|
| EUT           | HUAWEI MediaPad T2 7.0 (MediaPad T2 7.0 for short)  | Model Name        | BGO-L03    |
| Temperature   | 25°C                                                | Relative Humidity | 60%        |
| Test Voltage  | AC 120V/60Hz                                        | Polarization      | Horizontal |
| Test Mode     | Adapter+playing+Earphone                            |                   |            |
| Note          | USB Cable:Luxshare+Adapter:Huntkey+Earphone:GoerTek |                   |            |
| Test Engineer | Lucky Mao                                           |                   |            |

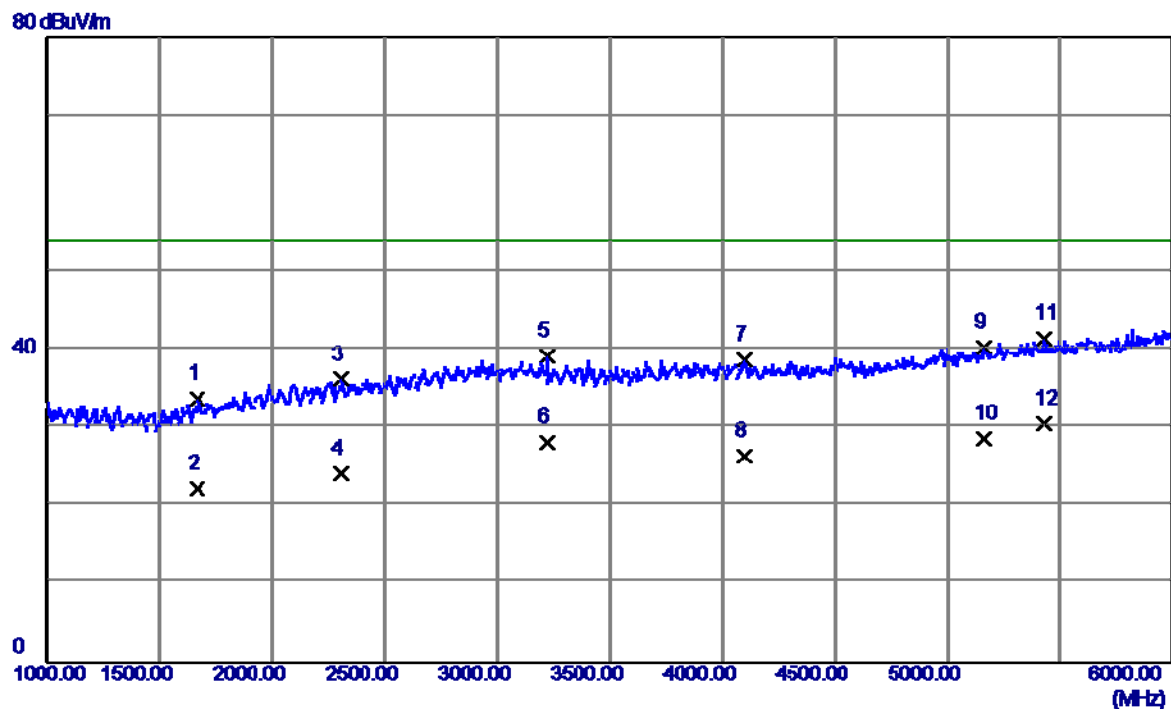

| No.  | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector |
|------|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|
| 1    | 1665.0000    | 39.16                      | -5.39                   | 33.77                     | 74.00           | -40.23       | Peak     |
| 2    | 1665.0000    | 27.69                      | -5.39                   | 22.30                     | 54.00           | -31.70       | AVG      |
| 3    | 2305.0000    | 37.93                      | -1.69                   | 36.24                     | 74.00           | -37.76       | Peak     |
| 4    | 2305.0000    | 25.79                      | -1.69                   | 24.10                     | 54.00           | -29.90       | AVG      |
| 5    | 3220.0000    | 37.73                      | 1.44                    | 39.17                     | 74.00           | -34.83       | Peak     |
| 6    | 3220.0000    | 26.76                      | 1.44                    | 28.20                     | 54.00           | -25.80       | AVG      |
| 7    | 4100.0000    | 35.61                      | 3.06                    | 38.67                     | 74.00           | -35.33       | Peak     |
| 8    | 4100.0000    | 23.34                      | 3.06                    | 26.40                     | 54.00           | -27.60       | AVG      |
| 9    | 5160.0000    | 34.17                      | 6.12                    | 40.29                     | 74.00           | -33.71       | Peak     |
| 10   | 5160.0000    | 22.58                      | 6.12                    | 28.70                     | 54.00           | -25.30       | AVG      |
| 11   | 5430.0000    | 34.50                      | 7.00                    | 41.50                     | 74.00           | -32.50       | Peak     |
| 12 * | 5430.0000    | 23.50                      | 7.00                    | 30.50                     | 54.00           | -23.50       | AVG      |


|               |                                                        |                   |          |
|---------------|--------------------------------------------------------|-------------------|----------|
| EUT           | HUAWEI MediaPad T2 7.0 (MediaPad T2 7.0 for short)     | Model Name        | BGO-L03  |
| Temperature   | 25°C                                                   | Relative Humidity | 60%      |
| Test Voltage  | AC 120V/60Hz                                           | Polarization      | Vertical |
| Test Mode     | Adapter+playing+Earphone                               |                   |          |
| Note          | USB Cable:Luxshare+Adapter:Huntkey+Earphone:Lianchuang |                   |          |
| Test Engineer | Lucky Mao                                              |                   |          |

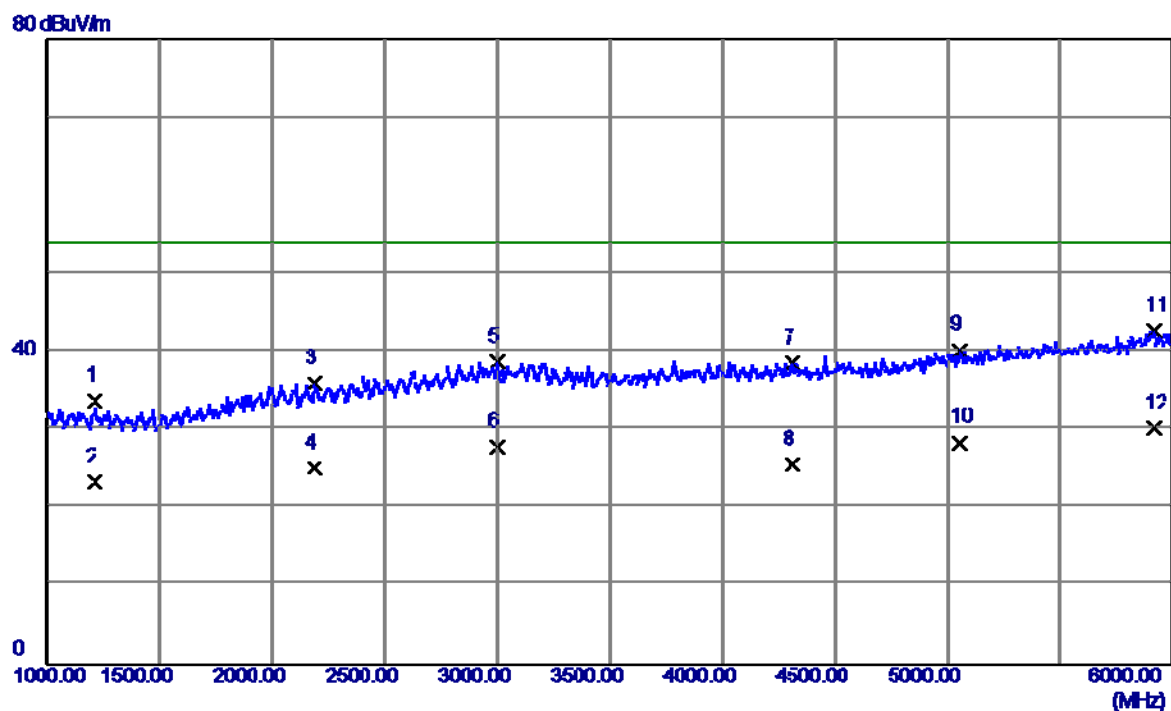

| No.  | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector |
|------|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|
| 1    | 1210.0000    | 41.10                      | -7.39                   | 33.71                     | 74.00           | -40.29       | Peak     |
| 2    | 1210.0000    | 30.69                      | -7.39                   | 23.30                     | 54.00           | -30.70       | AVG      |
| 3    | 2190.0000    | 38.15                      | -2.12                   | 36.03                     | 74.00           | -37.97       | Peak     |
| 4    | 2190.0000    | 27.22                      | -2.12                   | 25.10                     | 54.00           | -28.90       | AVG      |
| 5    | 3000.0000    | 37.17                      | 1.53                    | 38.70                     | 74.00           | -35.30       | Peak     |
| 6    | 3000.0000    | 26.37                      | 1.53                    | 27.90                     | 54.00           | -26.10       | AVG      |
| 7    | 4310.0000    | 35.35                      | 3.28                    | 38.63                     | 74.00           | -35.37       | Peak     |
| 8    | 4310.0000    | 22.32                      | 3.28                    | 25.60                     | 54.00           | -28.40       | AVG      |
| 9    | 5055.0000    | 34.46                      | 5.78                    | 40.24                     | 74.00           | -33.76       | Peak     |
| 10   | 5055.0000    | 22.62                      | 5.78                    | 28.40                     | 54.00           | -25.60       | AVG      |
| 11   | 5915.0000    | 34.05                      | 8.69                    | 42.74                     | 74.00           | -31.26       | Peak     |
| 12 * | 5915.0000    | 21.51                      | 8.69                    | 30.20                     | 54.00           | -23.80       | AVG      |


|               |                                                        |                   |            |
|---------------|--------------------------------------------------------|-------------------|------------|
| EUT           | HUAWEI MediaPad T2 7.0 (MediaPad T2 7.0 for short)     | Model Name        | BGO-L03    |
| Temperature   | 25°C                                                   | Relative Humidity | 60%        |
| Test Voltage  | AC 120V/60Hz                                           | Polarization      | Horizontal |
| Test Mode     | Adapter+playing+Earphone                               |                   |            |
| Note          | USB Cable:Luxshare+Adapter:Huntkey+Earphone:Lianchuang |                   |            |
| Test Engineer | Lucky Mao                                              |                   |            |

80 dBuV/m

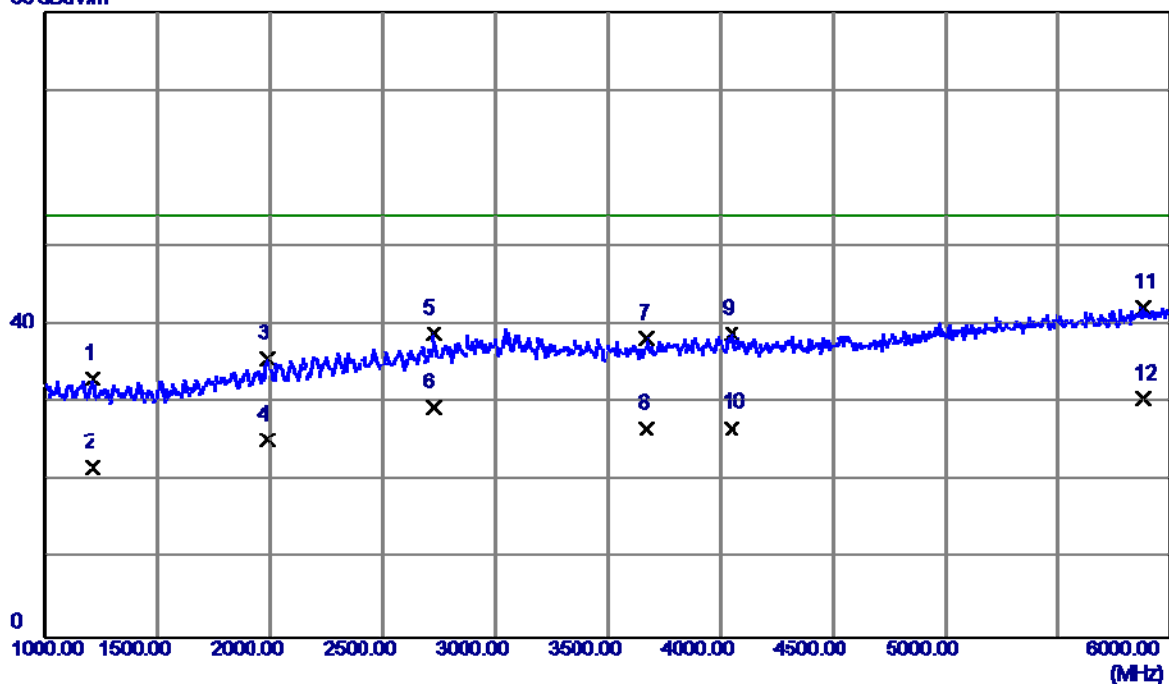


| No.  | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector |
|------|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|
| 1    | 1210.0000    | 40.49                      | -7.39                   | 33.10                     | 74.00           | -40.90       | Peak     |
| 2    | 1210.0000    | 29.19                      | -7.39                   | 21.80                     | 54.00           | -32.20       | AVG      |
| 3    | 1990.0000    | 38.65                      | -2.90                   | 35.75                     | 74.00           | -38.25       | Peak     |
| 4    | 1990.0000    | 28.20                      | -2.90                   | 25.30                     | 54.00           | -28.70       | AVG      |
| 5    | 2725.0000    | 38.71                      | 0.15                    | 38.86                     | 74.00           | -35.14       | Peak     |
| 6    | 2725.0000    | 29.25                      | 0.15                    | 29.40                     | 54.00           | -24.60       | AVG      |
| 7    | 3675.0000    | 36.29                      | 1.89                    | 38.18                     | 74.00           | -35.82       | Peak     |
| 8    | 3675.0000    | 24.81                      | 1.89                    | 26.70                     | 54.00           | -27.30       | AVG      |
| 9    | 4050.0000    | 35.84                      | 3.00                    | 38.84                     | 74.00           | -35.16       | Peak     |
| 10   | 4050.0000    | 23.80                      | 3.00                    | 26.80                     | 54.00           | -27.20       | AVG      |
| 11   | 5880.0000    | 33.65                      | 8.57                    | 42.22                     | 74.00           | -31.78       | Peak     |
| 12 * | 5880.0000    | 22.03                      | 8.57                    | 30.60                     | 54.00           | -23.40       | AVG      |

|               |                                                       |                   |          |
|---------------|-------------------------------------------------------|-------------------|----------|
| EUT           | HUAWEI MediaPad T2 7.0 (MediaPad T2 7.0 for short)    | Model Name        | BGO-L03  |
| Temperature   | 25°C                                                  | Relative Humidity | 60%      |
| Test Voltage  | AC 120V/60Hz                                          | Polarization      | Vertical |
| Test Mode     | Adapter+playing+Earphone                              |                   |          |
| Note          | USB Cable:Luxshare+Adapter:Huntkey+Earphone:QUANCHENG |                   |          |
| Test Engineer | Lucky Mao                                             |                   |          |

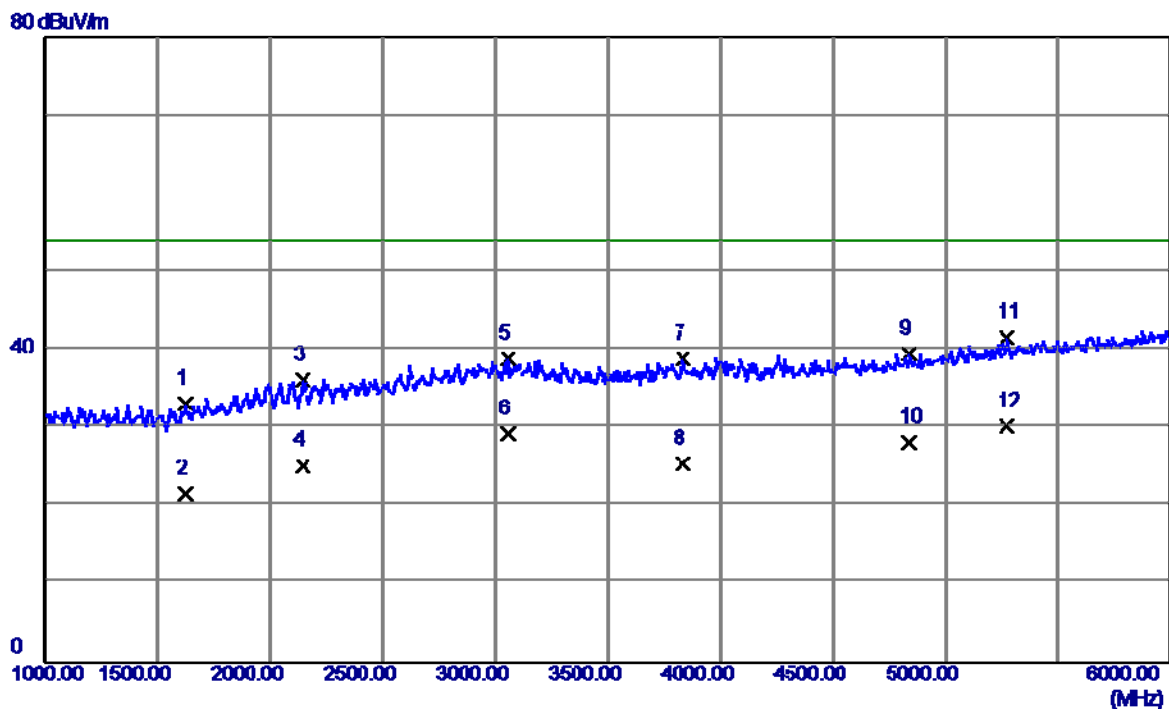


| No.  | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector |
|------|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|
| 1    | 1620.0000    | 38.91                      | -5.73                   | 33.18                     | 74.00           | -40.82       | Peak     |
| 2    | 1620.0000    | 27.33                      | -5.73                   | 21.60                     | 54.00           | -32.40       | AVG      |
| 3    | 2145.0000    | 38.42                      | -2.28                   | 36.14                     | 74.00           | -37.86       | Peak     |
| 4    | 2145.0000    | 27.48                      | -2.28                   | 25.20                     | 54.00           | -28.80       | AVG      |
| 5    | 3055.0000    | 37.42                      | 1.51                    | 38.93                     | 74.00           | -35.07       | Peak     |
| 6    | 3055.0000    | 27.79                      | 1.51                    | 29.30                     | 54.00           | -24.70       | AVG      |
| 7    | 3835.0000    | 36.51                      | 2.41                    | 38.92                     | 74.00           | -35.08       | Peak     |
| 8    | 3835.0000    | 22.99                      | 2.41                    | 25.40                     | 54.00           | -28.60       | AVG      |
| 9    | 4840.0000    | 34.62                      | 4.92                    | 39.54                     | 74.00           | -34.46       | Peak     |
| 10   | 4840.0000    | 23.18                      | 4.92                    | 28.10                     | 54.00           | -25.90       | AVG      |
| 11   | 5270.0000    | 35.13                      | 6.48                    | 41.61                     | 74.00           | -32.39       | Peak     |
| 12 * | 5270.0000    | 23.82                      | 6.48                    | 30.30                     | 54.00           | -23.70       | AVG      |

|               |                                                       |                   |            |
|---------------|-------------------------------------------------------|-------------------|------------|
| EUT           | HUAWEI MediaPad T2 7.0 (MediaPad T2 7.0 for short)    | Model Name        | BGO-L03    |
| Temperature   | 25°C                                                  | Relative Humidity | 60%        |
| Test Voltage  | AC 120V/60Hz                                          | Polarization      | Horizontal |
| Test Mode     | Adapter+playing+Earphone                              |                   |            |
| Note          | USB Cable:Luxshare+Adapter:Huntkey+Earphone:QUANCHENG |                   |            |
| Test Engineer | Lucky Mao                                             |                   |            |

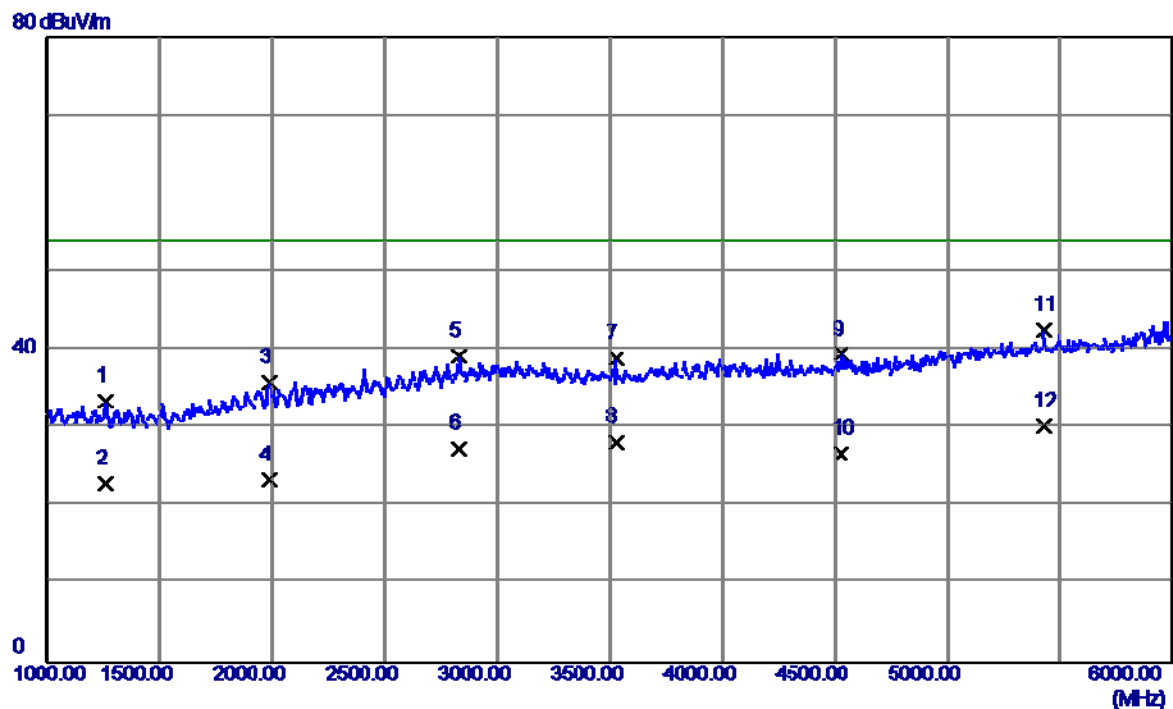


| No.  | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector |
|------|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|
| 1    | 1260.0000    | 40.69                      | -7.26                   | 33.43                     | 74.00           | -40.57       | Peak     |
| 2    | 1260.0000    | 30.16                      | -7.26                   | 22.90                     | 54.00           | -31.10       | AVG      |
| 3    | 1990.0000    | 38.71                      | -2.90                   | 35.81                     | 74.00           | -38.19       | Peak     |
| 4    | 1990.0000    | 26.30                      | -2.90                   | 23.40                     | 54.00           | -30.60       | AVG      |
| 5    | 2830.0000    | 38.45                      | 0.68                    | 39.13                     | 74.00           | -34.87       | Peak     |
| 6    | 2830.0000    | 26.62                      | 0.68                    | 27.30                     | 54.00           | -26.70       | AVG      |
| 7    | 3525.0000    | 37.54                      | 1.40                    | 38.94                     | 74.00           | -35.06       | Peak     |
| 8    | 3525.0000    | 26.70                      | 1.40                    | 28.10                     | 54.00           | -25.90       | AVG      |
| 9    | 4530.0000    | 35.83                      | 3.61                    | 39.44                     | 74.00           | -34.56       | Peak     |
| 10   | 4530.0000    | 23.09                      | 3.61                    | 26.70                     | 54.00           | -27.30       | AVG      |
| 11   | 5425.0000    | 35.63                      | 6.99                    | 42.62                     | 74.00           | -31.38       | Peak     |
| 12 * | 5425.0000    | 23.21                      | 6.99                    | 30.20                     | 54.00           | -23.80       | AVG      |

|               |                                                    |                   |          |
|---------------|----------------------------------------------------|-------------------|----------|
| EUT           | HUAWEI MediaPad T2 7.0 (MediaPad T2 7.0 for short) | Model Name        | BGO-L03  |
| Temperature   | 25°C                                               | Relative Humidity | 60%      |
| Test Voltage  | AC 120V/60Hz                                       | Polarization      | Vertical |
| Test Mode     | Adapter+Traffic(GSM)                               |                   |          |
| Note          | USB Cable:Luxshare+Adapter:Huntkey                 |                   |          |
| Test Engineer | Lucky Mao                                          |                   |          |

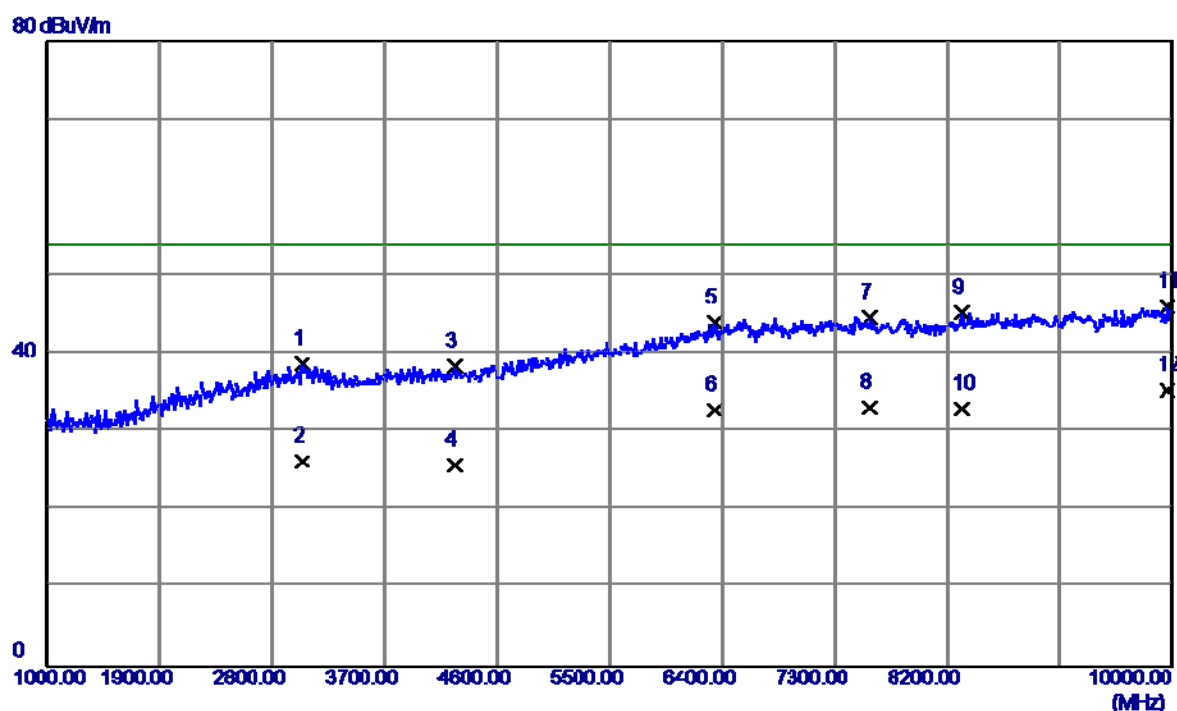


| No.  | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector |
|------|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|
| 1    | 3043.0000    | 37.14                      | 1.51                    | 38.65                     | 74.00           | -35.35       | Peak     |
| 2    | 3043.0000    | 24.79                      | 1.51                    | 26.30                     | 54.00           | -27.70       | AVG      |
| 3    | 4258.0000    | 35.14                      | 3.22                    | 38.36                     | 74.00           | -35.64       | Peak     |
| 4    | 4258.0000    | 22.48                      | 3.22                    | 25.70                     | 54.00           | -28.30       | AVG      |
| 5    | 6337.0000    | 33.66                      | 10.28                   | 43.94                     | 74.00           | -30.06       | Peak     |
| 6    | 6337.0000    | 22.52                      | 10.28                   | 32.80                     | 54.00           | -21.20       | AVG      |
| 7    | 7579.0000    | 32.94                      | 11.75                   | 44.69                     | 74.00           | -29.31       | Peak     |
| 8    | 7579.0000    | 21.35                      | 11.75                   | 33.10                     | 54.00           | -20.90       | AVG      |
| 9    | 8317.0000    | 32.77                      | 12.53                   | 45.30                     | 74.00           | -28.70       | Peak     |
| 10   | 8317.0000    | 20.37                      | 12.53                   | 32.90                     | 54.00           | -21.10       | AVG      |
| 11   | 9964.0000    | 32.10                      | 14.05                   | 46.15                     | 74.00           | -27.85       | Peak     |
| 12 * | 9964.0000    | 21.35                      | 14.05                   | 35.40                     | 54.00           | -18.60       | AVG      |

|               |                                                    |                   |            |
|---------------|----------------------------------------------------|-------------------|------------|
| EUT           | HUAWEI MediaPad T2 7.0 (MediaPad T2 7.0 for short) | Model Name        | BGO-L03    |
| Temperature   | 25°C                                               | Relative Humidity | 60%        |
| Test Voltage  | AC 120V/60Hz                                       | Polarization      | Horizontal |
| Test Mode     | Adapter+Traffic(GSM)                               |                   |            |
| Note          | USB Cable:Luxshare+Adapter:Huntkey                 |                   |            |
| Test Engineer | Lucky Mao                                          |                   |            |

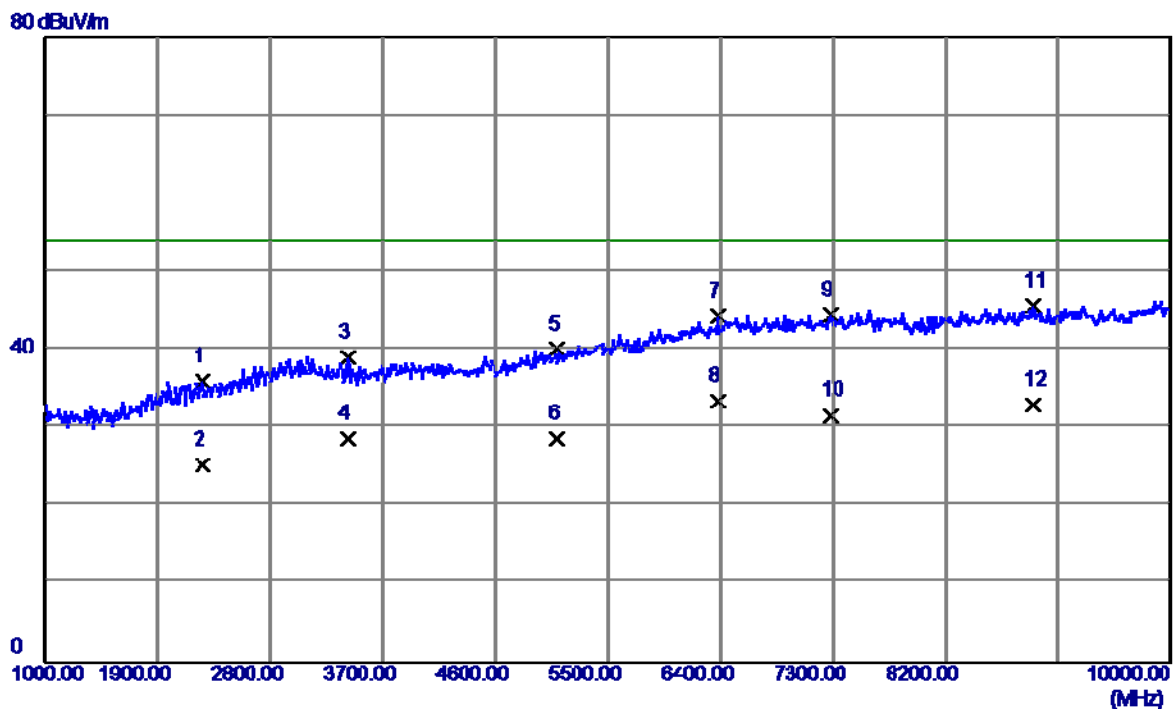


| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|
| 1   | 2260.0000    | 37.81                      | -1.86                   | 35.95                     | 74.00           | -38.05       | Peak     |
| 2   | 2260.0000    | 27.16                      | -1.86                   | 25.30                     | 54.00           | -28.70       | AVG      |
| 3   | 3421.0000    | 37.74                      | 1.35                    | 39.09                     | 74.00           | -34.91       | Peak     |
| 4   | 3421.0000    | 27.25                      | 1.35                    | 28.60                     | 54.00           | -25.40       | AVG      |
| 5   | 5095.0000    | 34.17                      | 5.91                    | 40.08                     | 74.00           | -33.92       | Peak     |
| 6   | 5095.0000    | 22.79                      | 5.91                    | 28.70                     | 54.00           | -25.30       | AVG      |
| 7   | 6382.0000    | 33.80                      | 10.45                   | 44.25                     | 74.00           | -29.75       | Peak     |
| 8 * | 6382.0000    | 23.05                      | 10.45                   | 33.50                     | 54.00           | -20.50       | AVG      |
| 9   | 7282.0000    | 33.11                      | 11.31                   | 44.42                     | 74.00           | -29.58       | Peak     |
| 10  | 7282.0000    | 20.29                      | 11.31                   | 31.60                     | 54.00           | -22.40       | AVG      |
| 11  | 8902.0000    | 32.27                      | 13.31                   | 45.58                     | 74.00           | -28.42       | Peak     |
| 12  | 8902.0000    | 19.59                      | 13.31                   | 32.90                     | 54.00           | -21.10       | AVG      |

|               |                                                    |                   |          |
|---------------|----------------------------------------------------|-------------------|----------|
| EUT           | HUAWEI MediaPad T2 7.0 (MediaPad T2 7.0 for short) | Model Name        | BGO-L03  |
| Temperature   | 25°C                                               | Relative Humidity | 60%      |
| Test Voltage  | AC 120V/60Hz                                       | Polarization      | Vertical |
| Test Mode     | Adapter+Traffic(WCDMA)                             |                   |          |
| Note          | USB Cable:Luxshare+Adapter:Huntkey                 |                   |          |
| Test Engineer | Lucky Mao                                          |                   |          |

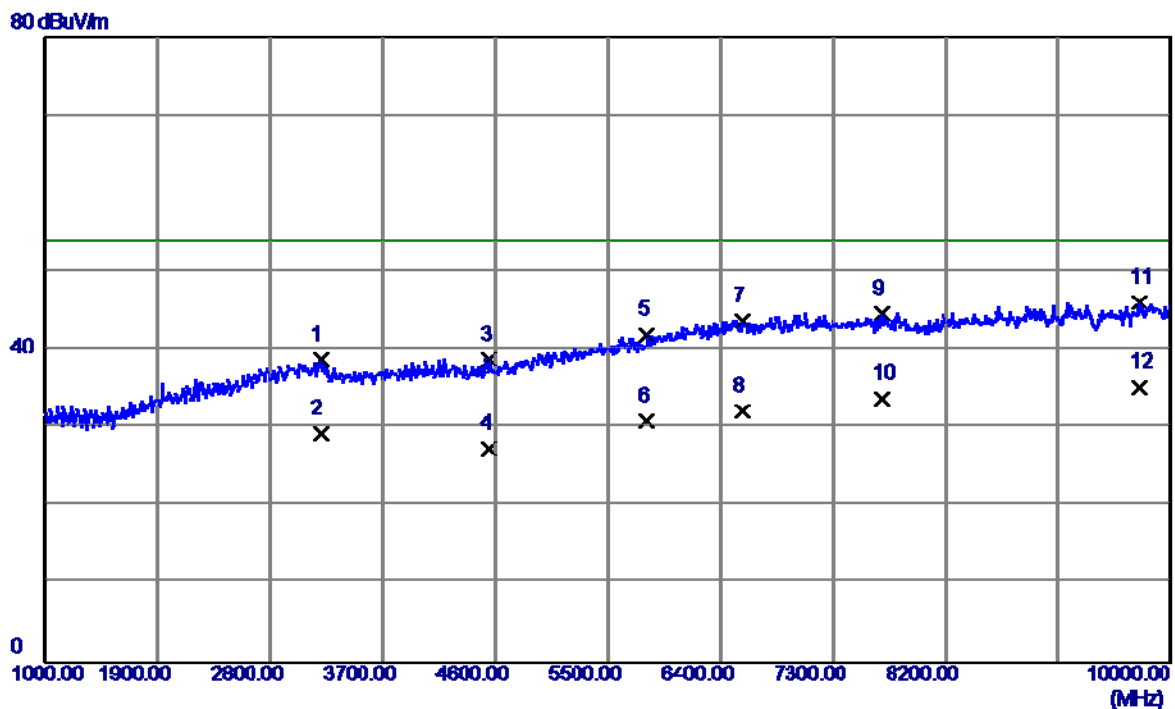


| No.  | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector |
|------|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|
| 1    | 3205.0000    | 37.23                      | 1.44                    | 38.67                     | 74.00           | -35.33       | Peak     |
| 2    | 3205.0000    | 27.86                      | 1.44                    | 29.30                     | 54.00           | -24.70       | AVG      |
| 3    | 4555.0000    | 34.99                      | 3.71                    | 38.70                     | 74.00           | -35.30       | Peak     |
| 4    | 4555.0000    | 23.59                      | 3.71                    | 27.30                     | 54.00           | -26.70       | AVG      |
| 5    | 5815.0000    | 33.54                      | 8.34                    | 41.88                     | 74.00           | -32.12       | Peak     |
| 6    | 5815.0000    | 22.56                      | 8.34                    | 30.90                     | 54.00           | -23.10       | AVG      |
| 7    | 6580.0000    | 32.85                      | 10.88                   | 43.73                     | 74.00           | -30.27       | Peak     |
| 8    | 6580.0000    | 21.22                      | 10.88                   | 32.10                     | 54.00           | -21.90       | AVG      |
| 9    | 7687.0000    | 32.88                      | 11.74                   | 44.62                     | 74.00           | -29.38       | Peak     |
| 10   | 7687.0000    | 21.96                      | 11.74                   | 33.70                     | 54.00           | -20.30       | AVG      |
| 11   | 9748.0000    | 32.39                      | 13.66                   | 46.05                     | 74.00           | -27.95       | Peak     |
| 12 * | 9748.0000    | 21.54                      | 13.66                   | 35.20                     | 54.00           | -18.80       | AVG      |

|               |                                                    |                   |            |
|---------------|----------------------------------------------------|-------------------|------------|
| EUT           | HUAWEI MediaPad T2 7.0 (MediaPad T2 7.0 for short) | Model Name        | BGO-L03    |
| Temperature   | 25°C                                               | Relative Humidity | 60%        |
| Test Voltage  | AC 120V/60Hz                                       | Polarization      | Horizontal |
| Test Mode     | Adapter+Traffic(WCDMA)                             |                   |            |
| Note          | USB Cable:Luxshare+Adapter:Huntkey                 |                   |            |
| Test Engineer | Lucky Mao                                          |                   |            |

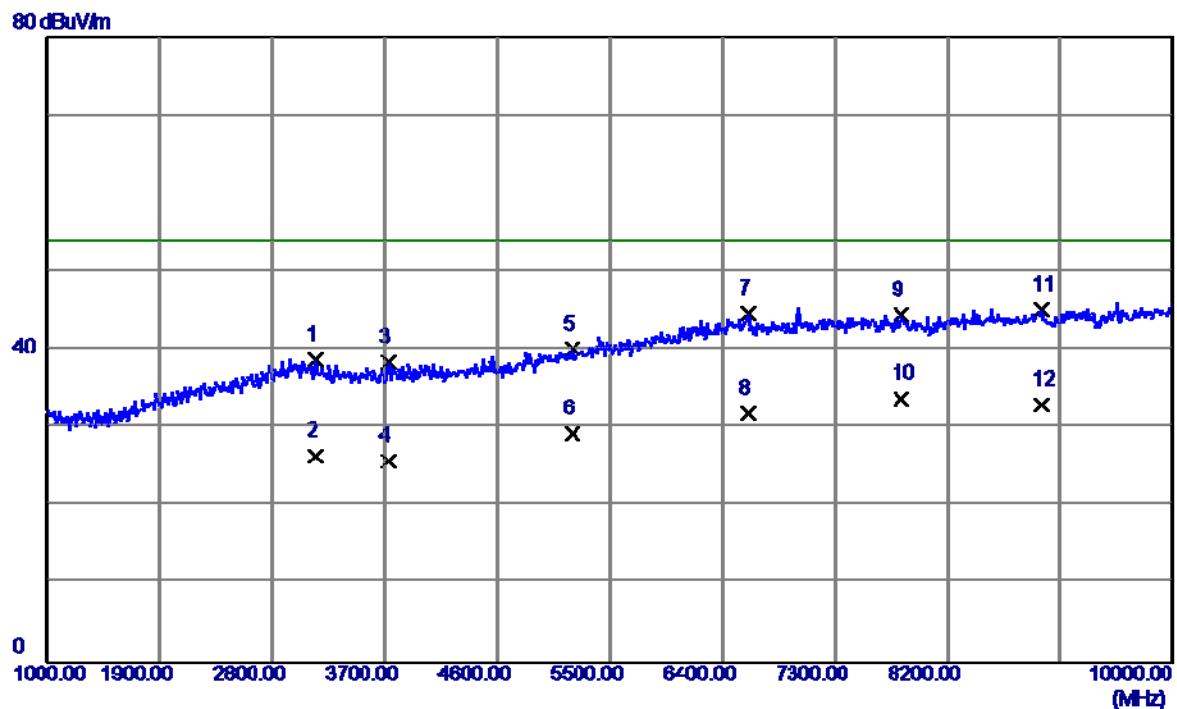

| No.  | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector |
|------|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|
| 1    | 3151.0000    | 37.29                      | 1.47                    | 38.76                     | 74.00           | -35.24       | Peak     |
| 2    | 3151.0000    | 24.93                      | 1.47                    | 26.40                     | 54.00           | -27.60       | AVG      |
| 3    | 3727.0000    | 36.38                      | 2.06                    | 38.44                     | 74.00           | -35.56       | Peak     |
| 4    | 3727.0000    | 23.64                      | 2.06                    | 25.70                     | 54.00           | -28.30       | AVG      |
| 5    | 5203.0000    | 33.82                      | 6.26                    | 40.08                     | 74.00           | -33.92       | Peak     |
| 6    | 5203.0000    | 23.04                      | 6.26                    | 29.30                     | 54.00           | -24.70       | AVG      |
| 7    | 6607.0000    | 33.75                      | 10.87                   | 44.62                     | 74.00           | -29.38       | Peak     |
| 8    | 6607.0000    | 20.93                      | 10.87                   | 31.80                     | 54.00           | -22.20       | AVG      |
| 9    | 7831.0000    | 32.82                      | 11.73                   | 44.55                     | 74.00           | -29.45       | Peak     |
| 10 * | 7831.0000    | 21.97                      | 11.73                   | 33.70                     | 54.00           | -20.30       | AVG      |
| 11   | 8947.0000    | 31.81                      | 13.34                   | 45.15                     | 74.00           | -28.85       | Peak     |
| 12   | 8947.0000    | 19.56                      | 13.34                   | 32.90                     | 54.00           | -21.10       | AVG      |


|               |                                                    |                   |          |
|---------------|----------------------------------------------------|-------------------|----------|
| EUT           | HUAWEI MediaPad T2 7.0 (MediaPad T2 7.0 for short) | Model Name        | BGO-L03  |
| Temperature   | 25°C                                               | Relative Humidity | 60%      |
| Test Voltage  | AC 120V/60Hz                                       | Polarization      | Vertical |
| Test Mode     | Adapter+Traffic(LTE)                               |                   |          |
| Note          | USB Cable:Luxshare+Adapter:Huntkey                 |                   |          |
| Test Engineer | Lucky Mao                                          |                   |          |

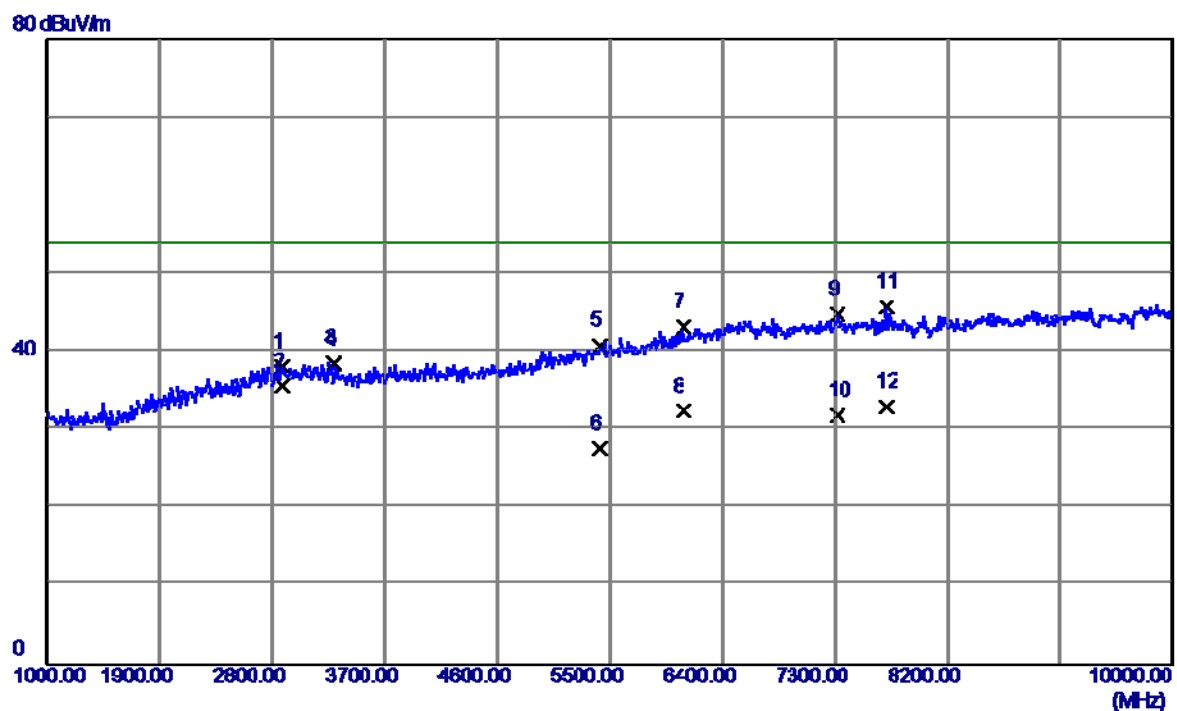

| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|
| 1   | 2881.0000    | 37.17                      | 0.93                    | 38.10                     | 74.00           | -35.90       | Peak     |
| 2   | 2881.0000    | 34.67                      | 0.93                    | 35.60                     | 54.00           | -18.40       | AVG      |
| 3   | 3295.0000    | 37.19                      | 1.40                    | 38.59                     | 74.00           | -35.41       | Peak     |
| 4 * | 3295.0000    | 37.00                      | 1.40                    | 38.40                     | 54.00           | -15.60       | AVG      |
| 5   | 5419.0000    | 33.83                      | 6.97                    | 40.80                     | 74.00           | -33.20       | Peak     |
| 6   | 5419.0000    | 20.63                      | 6.97                    | 27.60                     | 54.00           | -26.40       | AVG      |
| 7   | 6085.0000    | 33.81                      | 9.32                    | 43.13                     | 74.00           | -30.87       | Peak     |
| 8   | 6085.0000    | 23.08                      | 9.32                    | 32.40                     | 54.00           | -21.60       | AVG      |
| 9   | 7318.0000    | 33.48                      | 11.39                   | 44.87                     | 74.00           | -29.13       | Peak     |
| 10  | 7318.0000    | 20.41                      | 11.39                   | 31.80                     | 54.00           | -22.20       | AVG      |
| 11  | 7705.0000    | 33.95                      | 11.74                   | 45.69                     | 74.00           | -28.31       | Peak     |
| 12  | 7705.0000    | 21.16                      | 11.74                   | 32.90                     | 54.00           | -21.10       | AVG      |


|               |                                                    |                   |            |
|---------------|----------------------------------------------------|-------------------|------------|
| EUT           | HUAWEI MediaPad T2 7.0 (MediaPad T2 7.0 for short) | Model Name        | BGO-L03    |
| Temperature   | 25°C                                               | Relative Humidity | 60%        |
| Test Voltage  | AC 120V/60Hz                                       | Polarization      | Horizontal |
| Test Mode     | Adapter+Traffic(LTE)                               |                   |            |
| Note          | USB Cable:Luxshare+Adapter:Huntkey                 |                   |            |
| Test Engineer | Lucky Mao                                          |                   |            |

80 dBuV/m

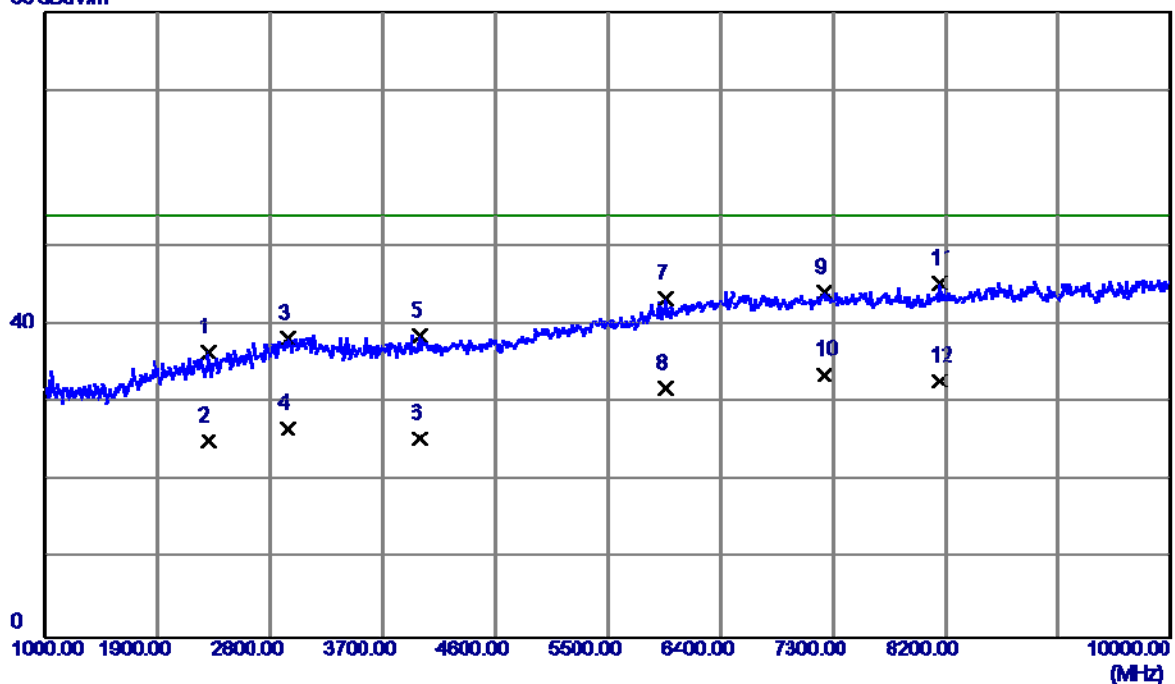


| No.  | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector |
|------|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|
| 1    | 2305.0000    | 38.13                      | -1.69                   | 36.44                     | 74.00           | -37.56       | Peak     |
| 2    | 2305.0000    | 26.79                      | -1.69                   | 25.10                     | 54.00           | -28.90       | AVG      |
| 3    | 2944.0000    | 36.93                      | 1.25                    | 38.18                     | 74.00           | -35.82       | Peak     |
| 4    | 2944.0000    | 25.45                      | 1.25                    | 26.70                     | 54.00           | -27.30       | AVG      |
| 5    | 3997.0000    | 35.69                      | 2.94                    | 38.63                     | 74.00           | -35.37       | Peak     |
| 6    | 3997.0000    | 22.46                      | 2.94                    | 25.40                     | 54.00           | -28.60       | AVG      |
| 7    | 5959.0000    | 34.49                      | 8.85                    | 43.34                     | 74.00           | -30.66       | Peak     |
| 8    | 5959.0000    | 23.05                      | 8.85                    | 31.90                     | 54.00           | -22.10       | AVG      |
| 9    | 7228.0000    | 32.95                      | 11.21                   | 44.16                     | 74.00           | -29.84       | Peak     |
| 10 * | 7228.0000    | 22.39                      | 11.21                   | 33.60                     | 54.00           | -20.40       | AVG      |
| 11   | 8146.0000    | 33.15                      | 12.09                   | 45.24                     | 74.00           | -28.76       | Peak     |
| 12   | 8146.0000    | 20.71                      | 12.09                   | 32.80                     | 54.00           | -21.20       | AVG      |

|               |                                                    |                   |          |
|---------------|----------------------------------------------------|-------------------|----------|
| EUT           | HUAWEI MediaPad T2 7.0 (MediaPad T2 7.0 for short) | Model Name        | BGO-L03  |
| Temperature   | 25°C                                               | Relative Humidity | 60%      |
| Test Voltage  | AC 120V/60Hz                                       | Polarization      | Vertical |
| Test Mode     | Adapter+Traffic(LTE)                               |                   |          |
| Note          | USB Cable:Luxshare+Adapter:Huntkey                 |                   |          |
| Test Engineer | Lucky Mao                                          |                   |          |

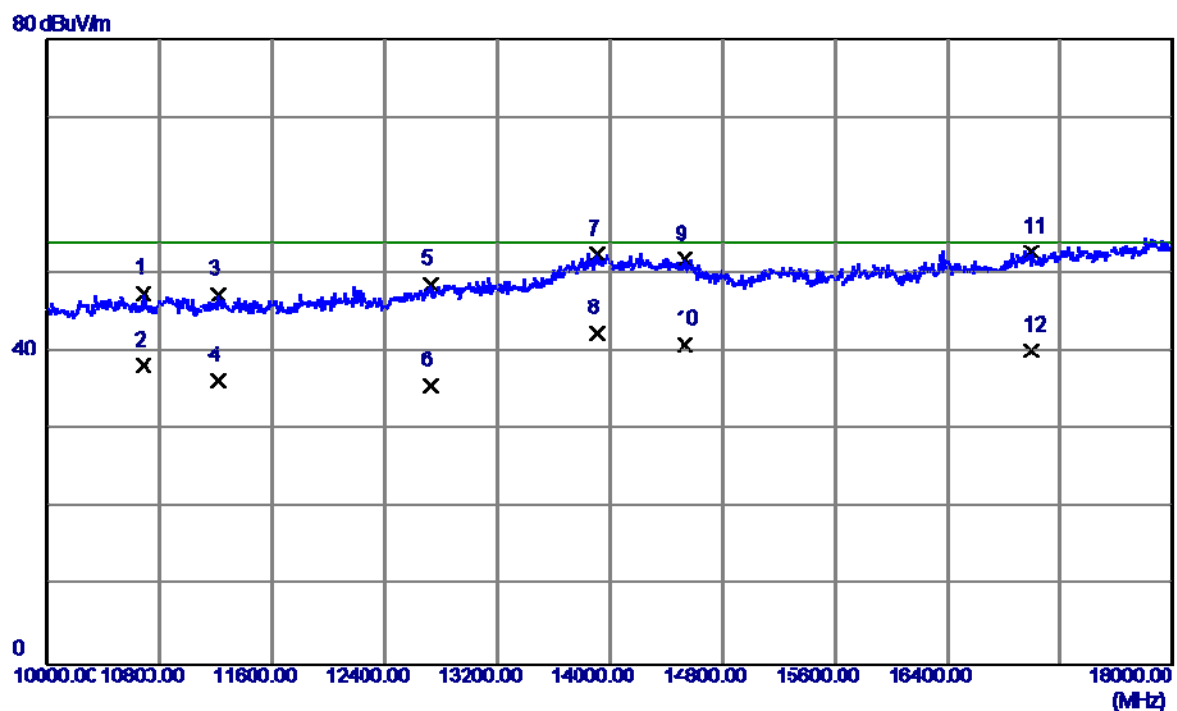

| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|
| 1   | 10688.0000   | 31.98                      | 15.53                   | 47.51                     | 74.00           | -26.49       | Peak     |
| 2   | 10688.0000   | 22.67                      | 15.53                   | 38.20                     | 54.00           | -15.80       | AVG      |
| 3   | 11216.0000   | 31.63                      | 15.74                   | 47.37                     | 74.00           | -26.63       | Peak     |
| 4   | 11216.0000   | 20.56                      | 15.74                   | 36.30                     | 54.00           | -17.70       | AVG      |
| 5   | 12728.0000   | 31.39                      | 17.23                   | 48.62                     | 74.00           | -25.38       | Peak     |
| 6   | 12728.0000   | 18.47                      | 17.23                   | 35.70                     | 54.00           | -18.30       | AVG      |
| 7   | 13912.0000   | 31.11                      | 21.42                   | 52.53                     | 74.00           | -21.47       | Peak     |
| 8 * | 13912.0000   | 20.98                      | 21.42                   | 42.40                     | 54.00           | -11.60       | AVG      |
| 9   | 14536.0000   | 31.60                      | 20.29                   | 51.89                     | 74.00           | -22.11       | Peak     |
| 10  | 14536.0000   | 20.61                      | 20.29                   | 40.90                     | 54.00           | -13.10       | AVG      |
| 11  | 17000.0000   | 32.59                      | 20.28                   | 52.87                     | 74.00           | -21.13       | Peak     |
| 12  | 17000.0000   | 19.92                      | 20.28                   | 40.20                     | 54.00           | -13.80       | AVG      |

|               |                                                    |                   |            |
|---------------|----------------------------------------------------|-------------------|------------|
| EUT           | HUAWEI MediaPad T2 7.0 (MediaPad T2 7.0 for short) | Model Name        | BGO-L03    |
| Temperature   | 25°C                                               | Relative Humidity | 60%        |
| Test Voltage  | AC 120V/60Hz                                       | Polarization      | Horizontal |
| Test Mode     | Adapter+Traffic(LTE)                               |                   |            |
| Note          | USB Cable:Luxshare+Adapter:Huntkey                 |                   |            |
| Test Engineer | Lucky Mao                                          |                   |            |

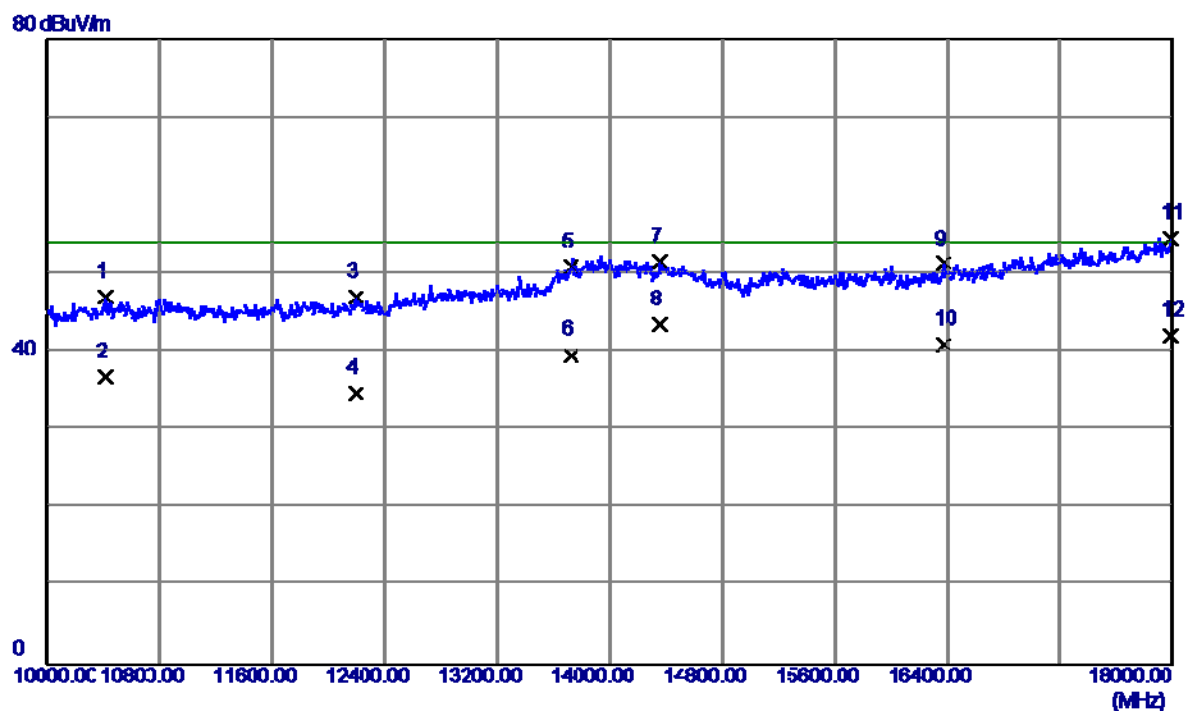

| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|
| 1   | 10416.0000   | 32.02                      | 15.09                   | 47.11                     | 74.00           | -26.89       | Peak     |
| 2   | 10416.0000   | 21.71                      | 15.09                   | 36.80                     | 54.00           | -17.20       | AVG      |
| 3   | 12192.0000   | 31.19                      | 15.86                   | 47.05                     | 74.00           | -26.95       | Peak     |
| 4   | 12192.0000   | 18.84                      | 15.86                   | 34.70                     | 54.00           | -19.30       | AVG      |
| 5   | 13728.0000   | 30.30                      | 20.55                   | 50.85                     | 74.00           | -23.15       | Peak     |
| 6   | 13728.0000   | 19.05                      | 20.55                   | 39.60                     | 54.00           | -14.40       | AVG      |
| 7   | 14352.0000   | 30.60                      | 20.87                   | 51.47                     | 74.00           | -22.53       | Peak     |
| 8 * | 14352.0000   | 22.63                      | 20.87                   | 43.50                     | 54.00           | -10.50       | AVG      |
| 9   | 16376.0000   | 33.36                      | 17.92                   | 51.28                     | 74.00           | -22.72       | Peak     |
| 10  | 16376.0000   | 22.98                      | 17.92                   | 40.90                     | 54.00           | -13.10       | AVG      |
| 11  | 17992.0000   | 31.92                      | 22.69                   | 54.61                     | 74.00           | -19.39       | Peak     |
| 12  | 17992.0000   | 19.41                      | 22.69                   | 42.10                     | 54.00           | -11.90       | AVG      |