
| | |
|---|---|
| Orthogonal Axis: | X |
| Test Mode: | UNII-3/TX AC20 Mode 5825MHz |


**Vertical**

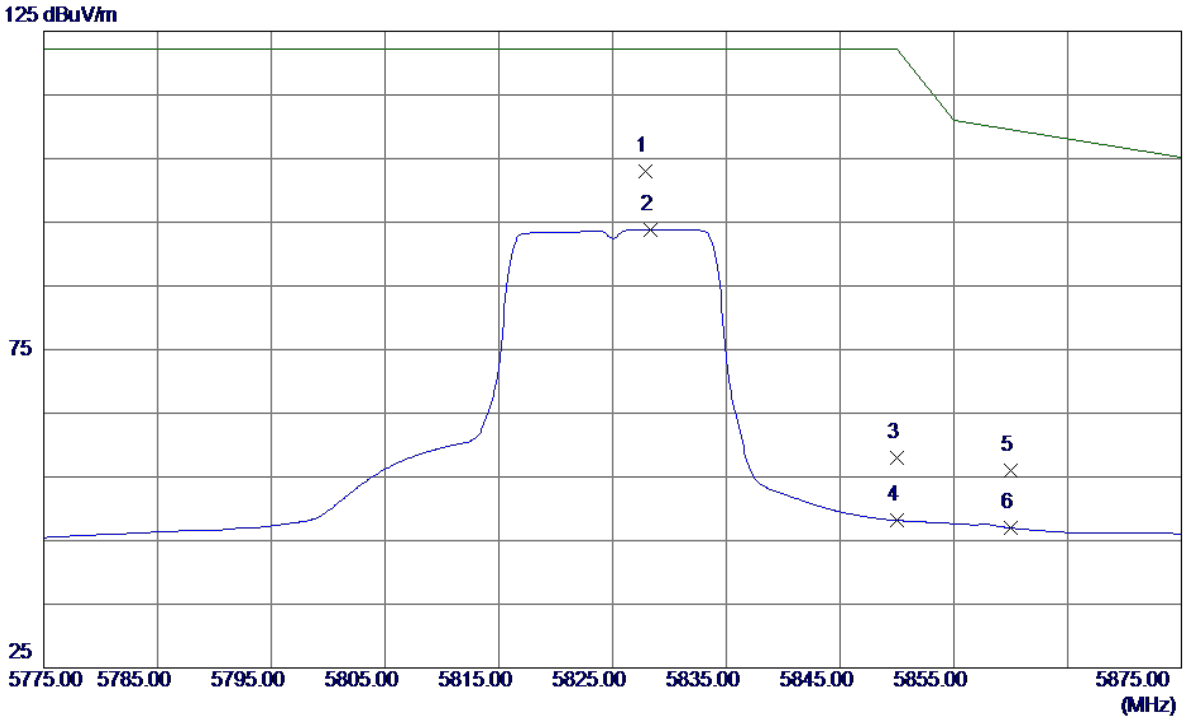


| No. | Freq. | Reading Level | Correct Factor | Measure ment | Limit | Margin | | |
|---|---|---|---|---|---|---|---|---|
| | MHz | dBuV/m | dB | dBuV/m | dBuV/m | dB | Detector | Comment |
| 1 * | 5827.9000 | 59.20 | 43.87 | 103.07 | 122.30 | -19.23 | Peak | |
| 2 | 5828.3000 | 49.90 | 43.87 | 93.77 | 122.30 | -28.53 | AVG | |
| 3 | 5850.0000 | 14.08 | 43.94 | 58.02 | 122.30 | -64.28 | Peak | |
| 4 | 5850.0000 | 4.23 | 43.94 | 48.17 | 122.30 | -74.13 | AVG | |
| 5 | 5860.0000 | 12.12 | 43.97 | 56.09 | 109.50 | -53.41 | Peak | |
| 6 | 5860.0000 | 3.01 | 43.97 | 46.98 | 109.50 | -62.52 | AVG | |

| | |
|---|---|
| Orthogonal Axis: | X |
| Test Mode: | UNII-3/TX AC20 Mode 5825MHz |


**Vertical**

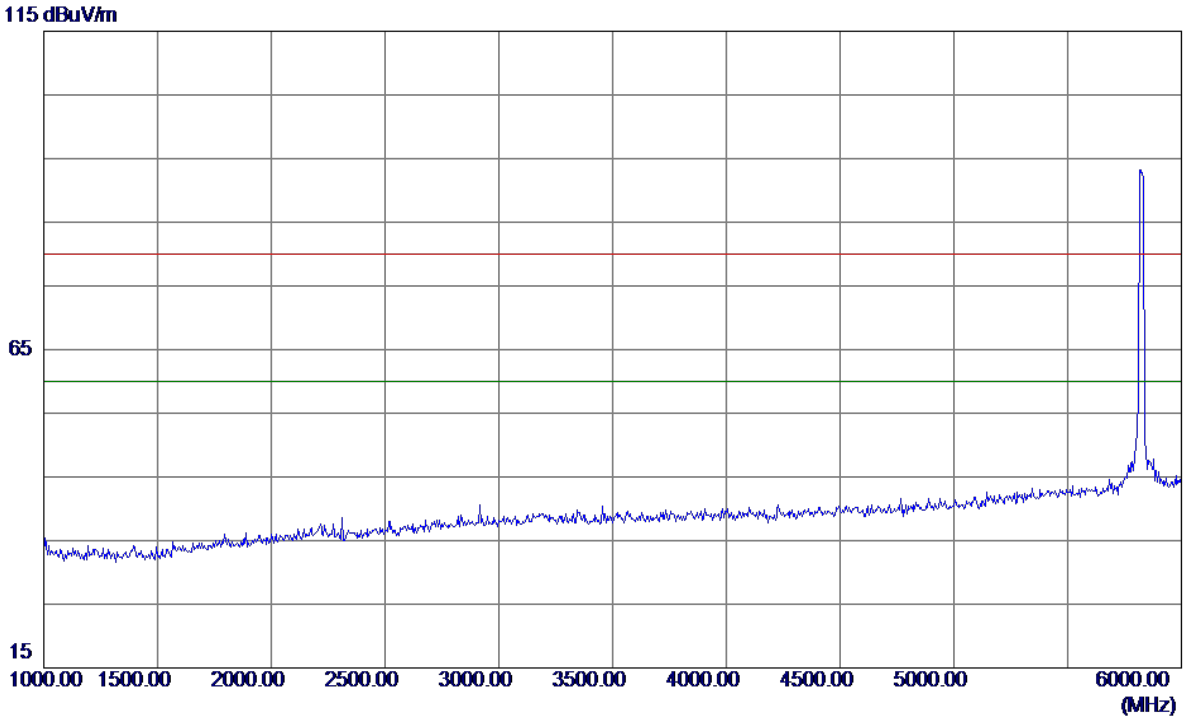


| No. | Freq. | Reading Level | Correct Factor | Measure ment | Limit | Margin | | |
|---|---|---|---|---|---|---|---|---|
| | MHz | dBuV/m | dB | dBuV/m | dBuV/m | dB | Detector | Comment |

| | |
|---|---|
| Orthogonal Axis: | X |
| Test Mode: | UNII-3/TX AC20 Mode 5825MHz |


**Vertical**

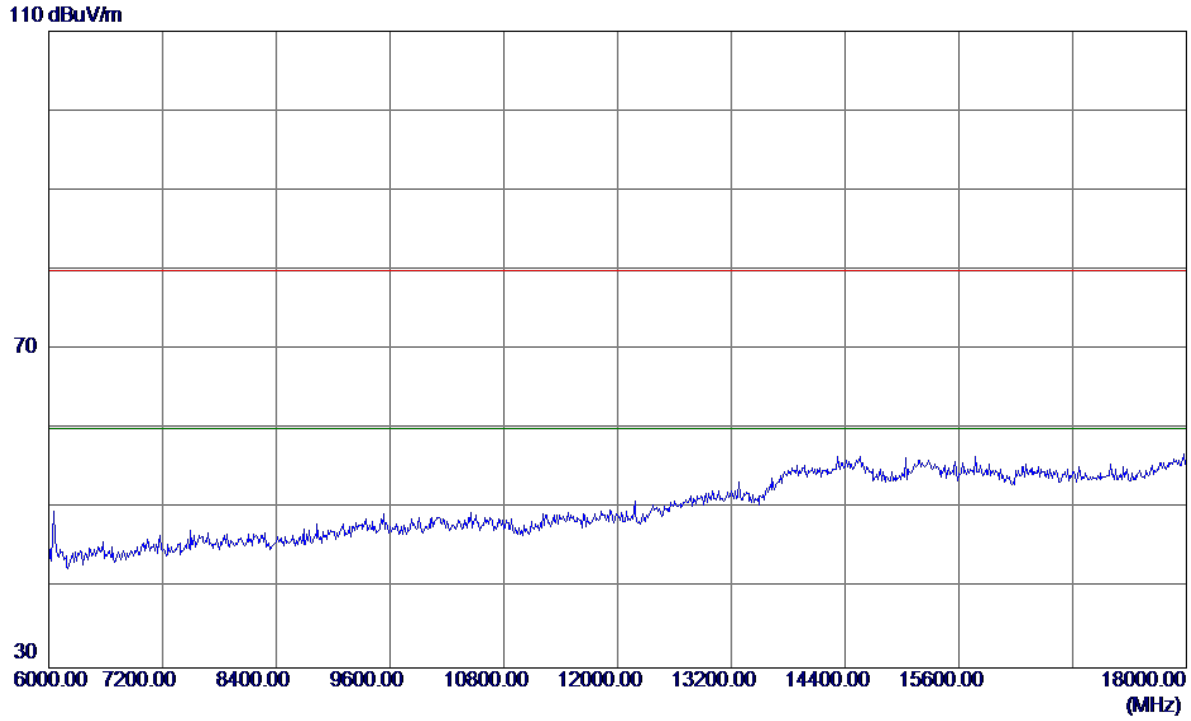


| No. | Freq. | Reading Level | Correct Factor | Measure ment | Limit | Margin | | |
|---|---|---|---|---|---|---|---|---|
| | MHz | dBuV/m | dB | dBuV/m | dBuV/m | dB | Detector | Comment |

| | |
|---|---|
| Orthogonal Axis: | X |
| Test Mode: | UNII-3/TX AC20 Mode 5825MHz |


**Vertical**

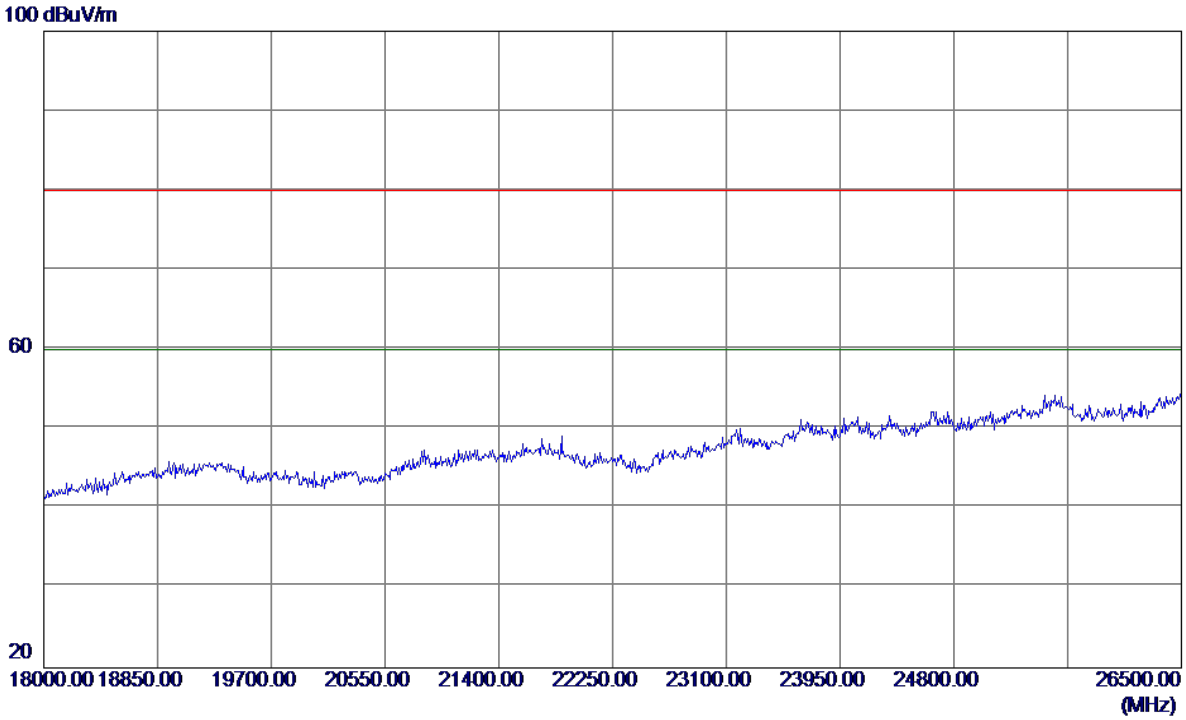


| No. | Freq. | Reading Level | Correct Factor | Measure ment | Limit | Margin | | |
|---|---|---|---|---|---|---|---|---|
| | MHz | dBuV/m | dB | dBuV/m | dBuV/m | dB | Detector | Comment |

| | |
|---|---|
| Orthogonal Axis: | X |
| Test Mode: | UNII-3/TX AC20 Mode 5825MHz |


**Vertical**

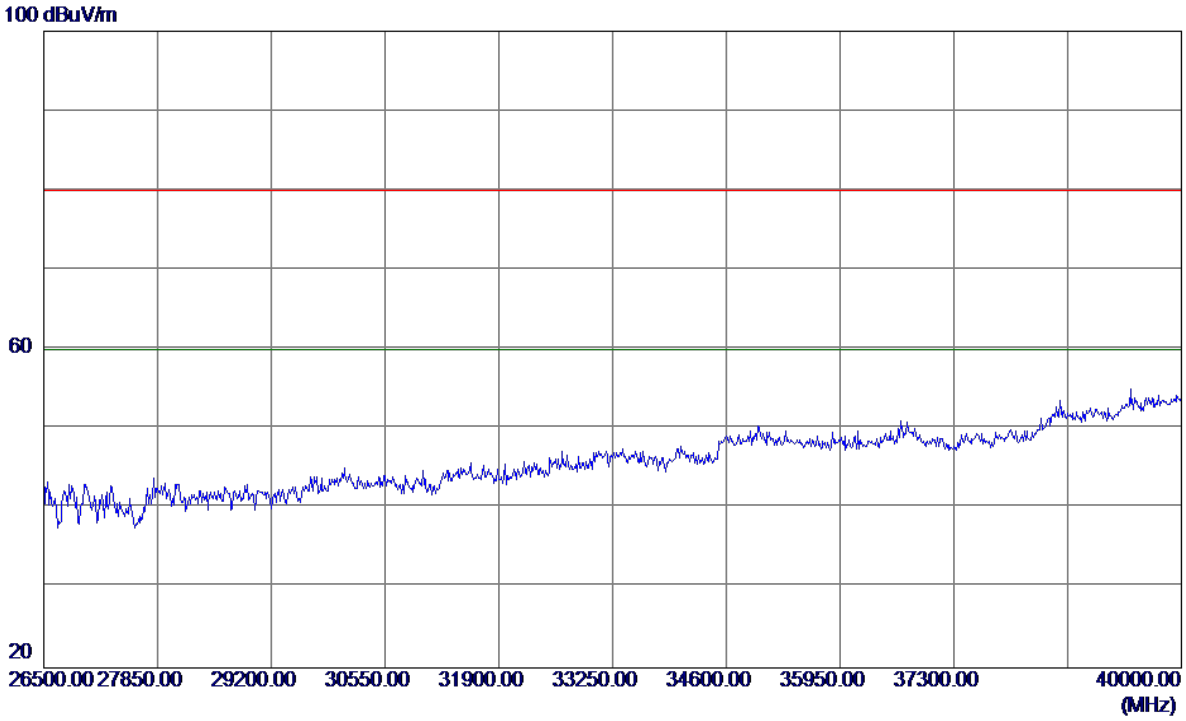


| No. | Freq. | Reading Level | Correct Factor | Measure ment | Limit | Margin | | |
|---|---|---|---|---|---|---|---|---|
| | MHz | dBuV/m | dB | dBuV/m | dBuV/m | dB | Detector | Comment |

| | |
|---|---|
| Orthogonal Axis: | X |
| Test Mode: | UNII-3/TX AC20 Mode 5825MHz |


**Horizontal**

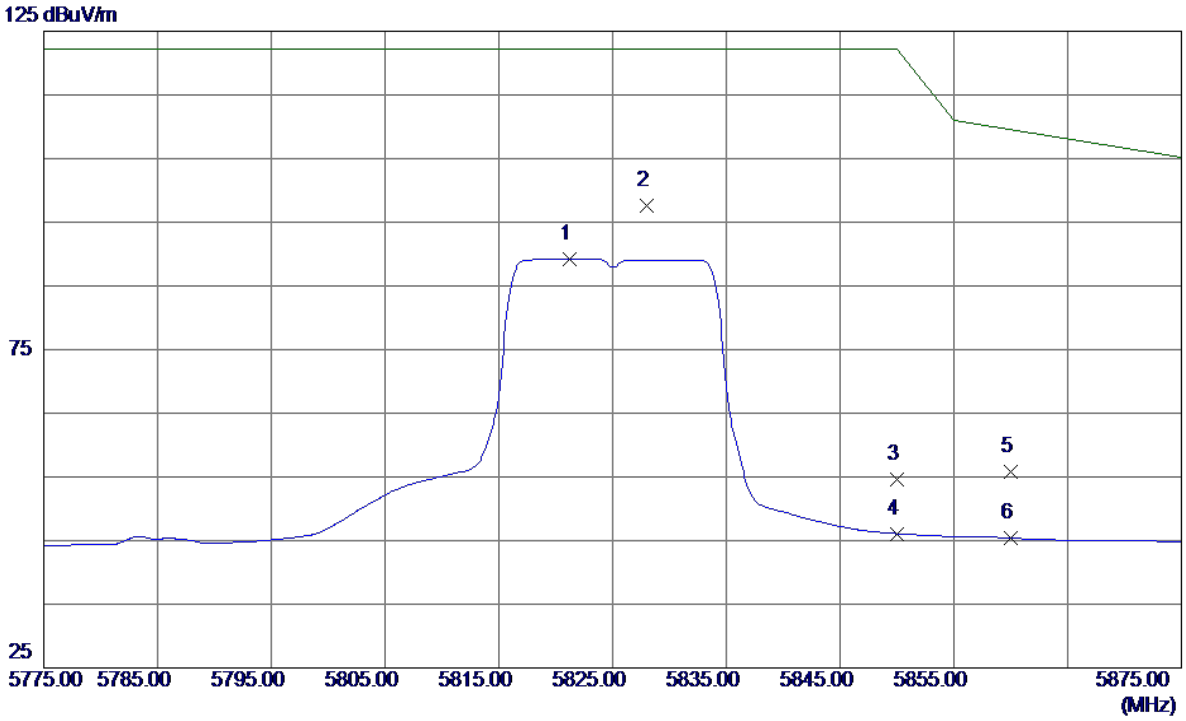


| No. | Freq. | Reading Level | Correct Factor | Measure ment | Limit | Margin | | |
|---|---|---|---|---|---|---|---|---|
| | MHz | dBuV/m | dB | dBuV/m | dBuV/m | dB | Detector | Comment |
| 1 | 5821.2000 | 45.38 | 43.85 | 89.23 | 122.30 | -33.07 | AVG | |
| 2 * | 5828.0000 | 53.80 | 43.87 | 97.67 | 122.30 | -24.63 | Peak | |
| 3 | 5850.0000 | 10.73 | 43.94 | 54.67 | 122.30 | -67.63 | Peak | |
| 4 | 5850.0000 | 2.14 | 43.94 | 46.08 | 122.30 | -76.22 | AVG | |
| 5 | 5860.0000 | 11.84 | 43.97 | 55.81 | 109.50 | -53.69 | Peak | |
| 6 | 5860.0000 | 1.41 | 43.97 | 45.38 | 109.50 | -64.12 | AVG | |

| | |
|---|---|
| Orthogonal Axis: | X |
| Test Mode: | UNII-3/TX AC20 Mode 5825MHz |


**Horizontal**

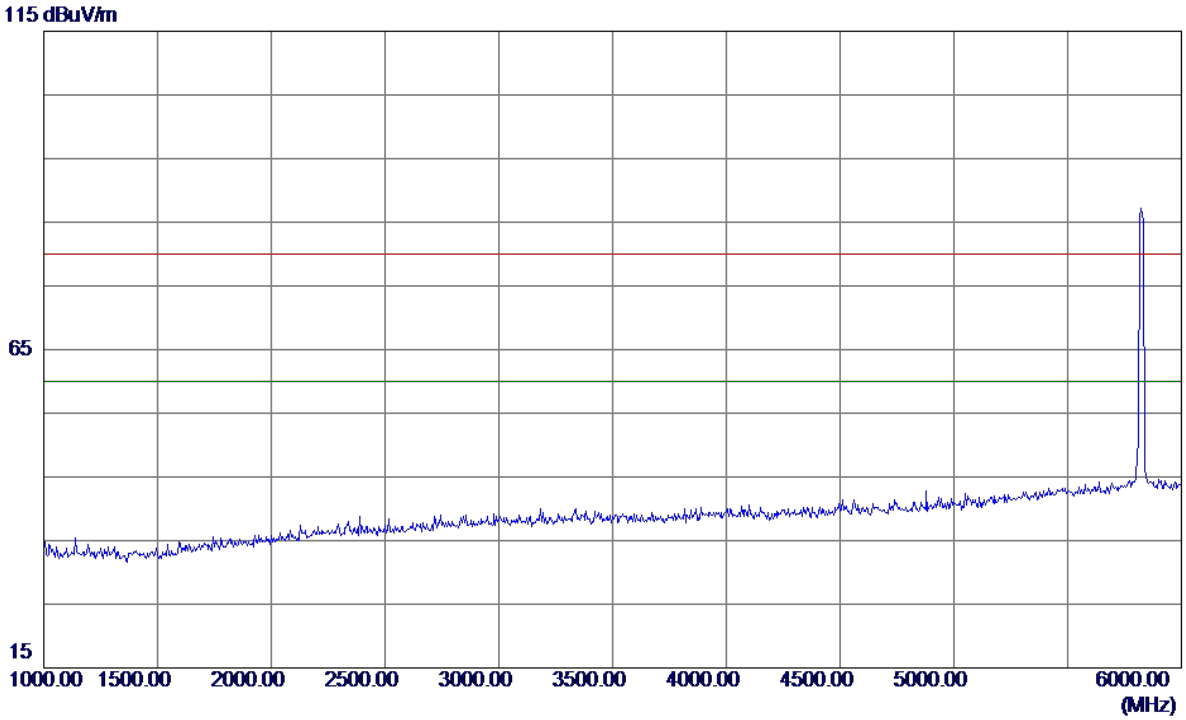


| No. | Freq. | Reading Level | Correct Factor | Measure ment | Limit | Margin | | |
|---|---|---|---|---|---|---|---|---|
| | MHz | dBuV/m | dB | dBuV/m | dBuV/m | dB | Detector | Comment |

| | |
|---|---|
| Orthogonal Axis: | X |
| Test Mode: | UNII-3/TX AC20 Mode 5825MHz |


**Horizontal**

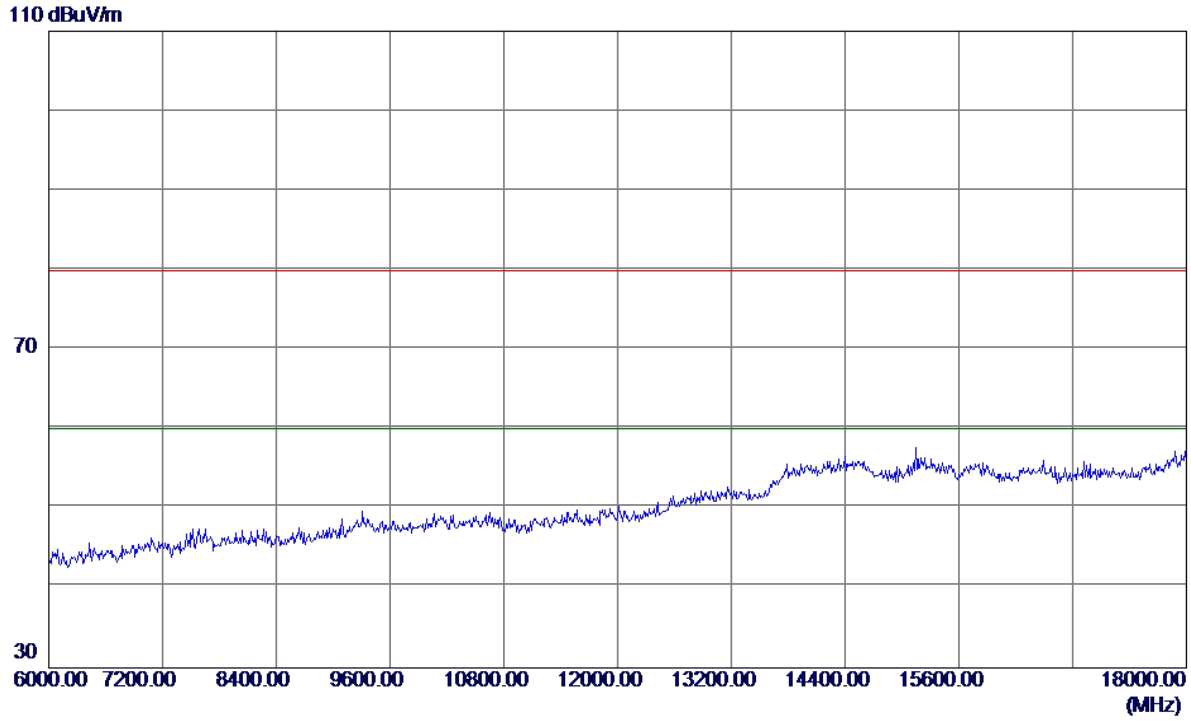


| No. | Freq. | Reading Level | Correct Factor | Measure ment | Limit | Margin | | |
|---|---|---|---|---|---|---|---|---|
| | MHz | dBuV/m | dB | dBuV/m | dBuV/m | dB | Detector | Comment |

| | |
|---|---|
| Orthogonal Axis: | X |
| Test Mode: | UNII-3/TX AC20 Mode 5825MHz |


**Horizontal**

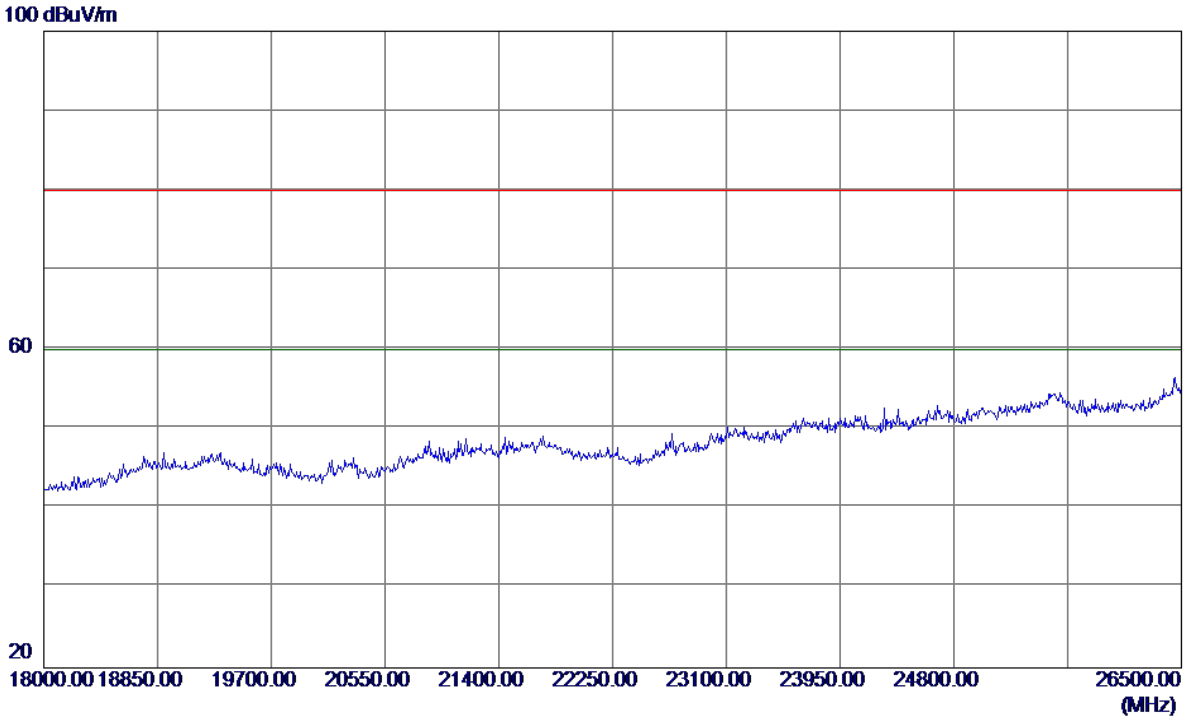


| No. | Freq. | Reading Level | Correct Factor | Measure ment | Limit | Margin | | |
|---|---|---|---|---|---|---|---|---|
| | MHz | dBuV/m | dB | dBuV/m | dBuV/m | dB | Detector | Comment |

| | |
|---|---|
| Orthogonal Axis: | X |
| Test Mode: | UNII-3/TX AC20 Mode 5825MHz |


**Horizontal**

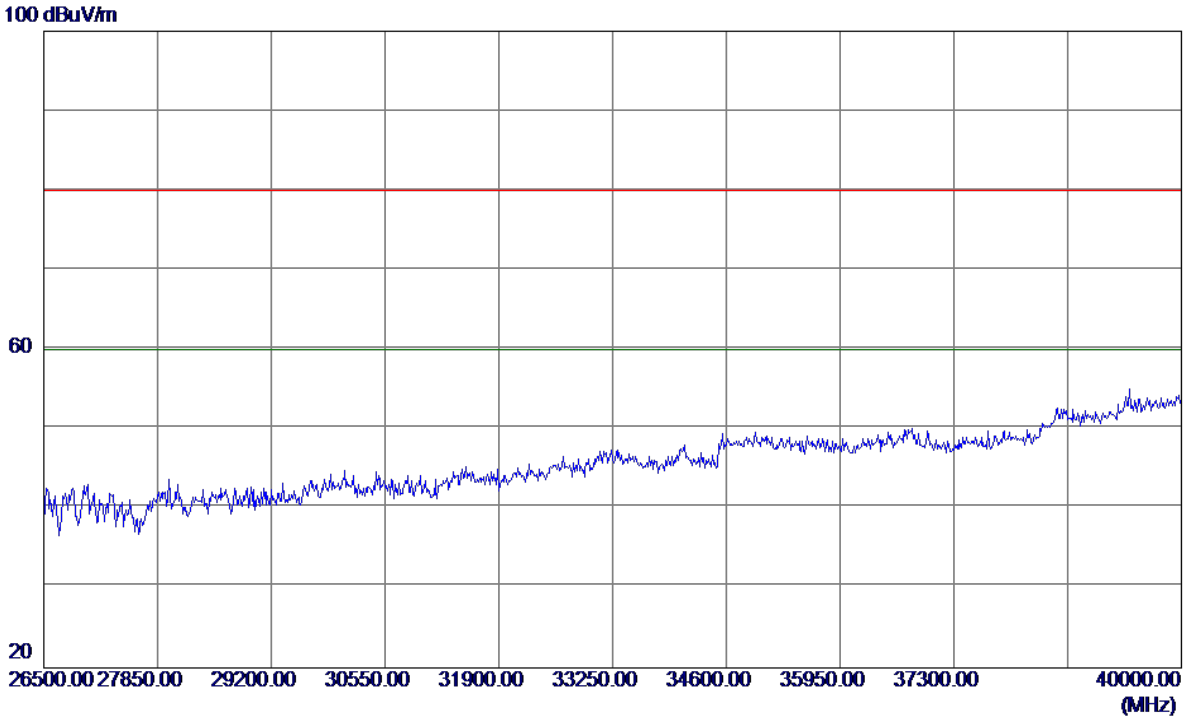


| No. | Freq. | Reading Level | Correct Factor | Measure ment | Limit | Margin | | |
|---|---|---|---|---|---|---|---|---|
| | MHz | dBuV/m | dB | dBuV/m | dBuV/m | dB | Detector | Comment |

| | |
|---|---|
| Orthogonal Axis: | X |
| Test Mode: | UNII-3/TX AC40 Mode 5755MHz |


**Vertical**

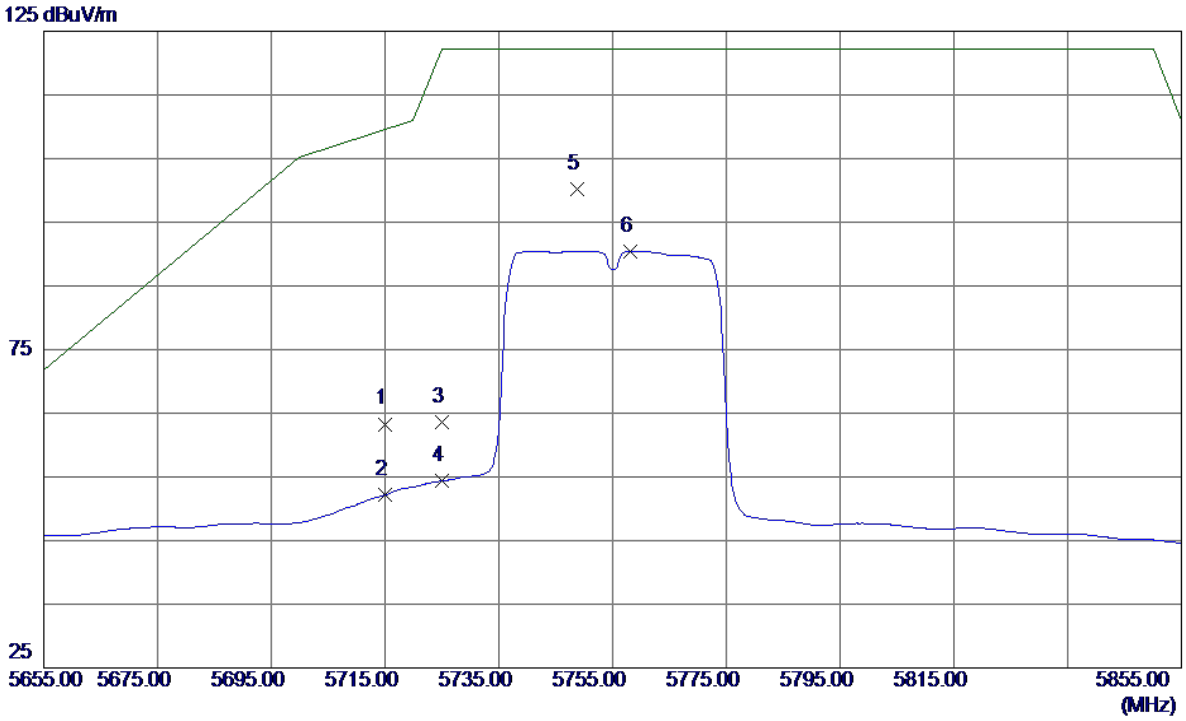


| No. | Freq. | Reading Level | Correct Factor | Measure ment | Limit | Margin | | |
|---|---|---|---|---|---|---|---|---|
| | MHz | dBuV/m | dB | dBuV/m | dBuV/m | dB | Detector | Comment |
| 1 | 5715.0000 | 19.77 | 43.53 | 63.30 | 109.50 | -46.20 | Peak | |
| 2 | 5715.0000 | 8.64 | 43.53 | 52.17 | 109.50 | -57.33 | AVG | |
| 3 | 5725.0000 | 20.04 | 43.56 | 63.60 | 122.30 | -58.70 | Peak | |
| 4 | 5725.0000 | 10.78 | 43.56 | 54.34 | 122.30 | -67.96 | AVG | |
| 5 * | 5748.8000 | 56.49 | 43.63 | 100.12 | 122.30 | -22.18 | Peak | |
| 6 | 5758.2000 | 46.83 | 43.66 | 90.49 | 122.30 | -31.81 | AVG | |

| | |
|---|---|
| Orthogonal Axis: | X |
| Test Mode: | UNII-3/TX AC40 Mode 5755MHz |


**Vertical**

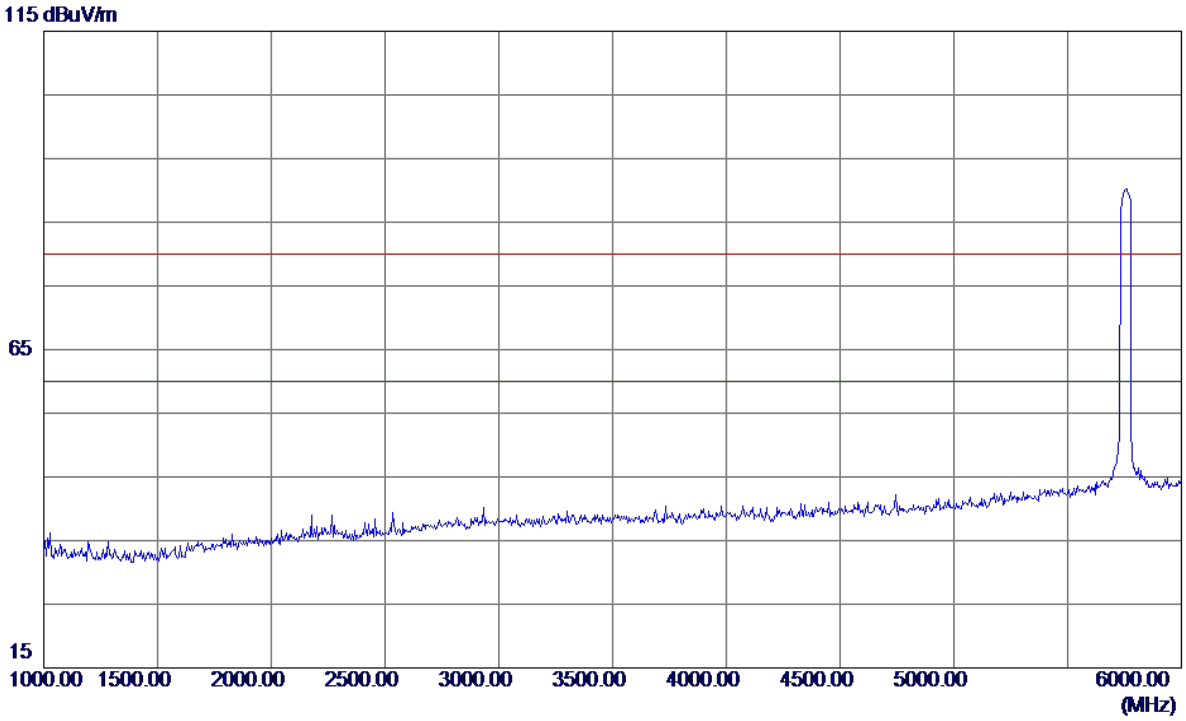


| No. | Freq. | Reading Level | Correct Factor | Measure ment | Limit | Margin | | |
|---|---|---|---|---|---|---|---|---|
| | MHz | dBuV/m | dB | dBuV/m | dBuV/m | dB | Detector | Comment |

| | |
|---|---|
| Orthogonal Axis: | X |
| Test Mode: | UNII-3/TX AC40 Mode 5755MHz |


**Vertical**

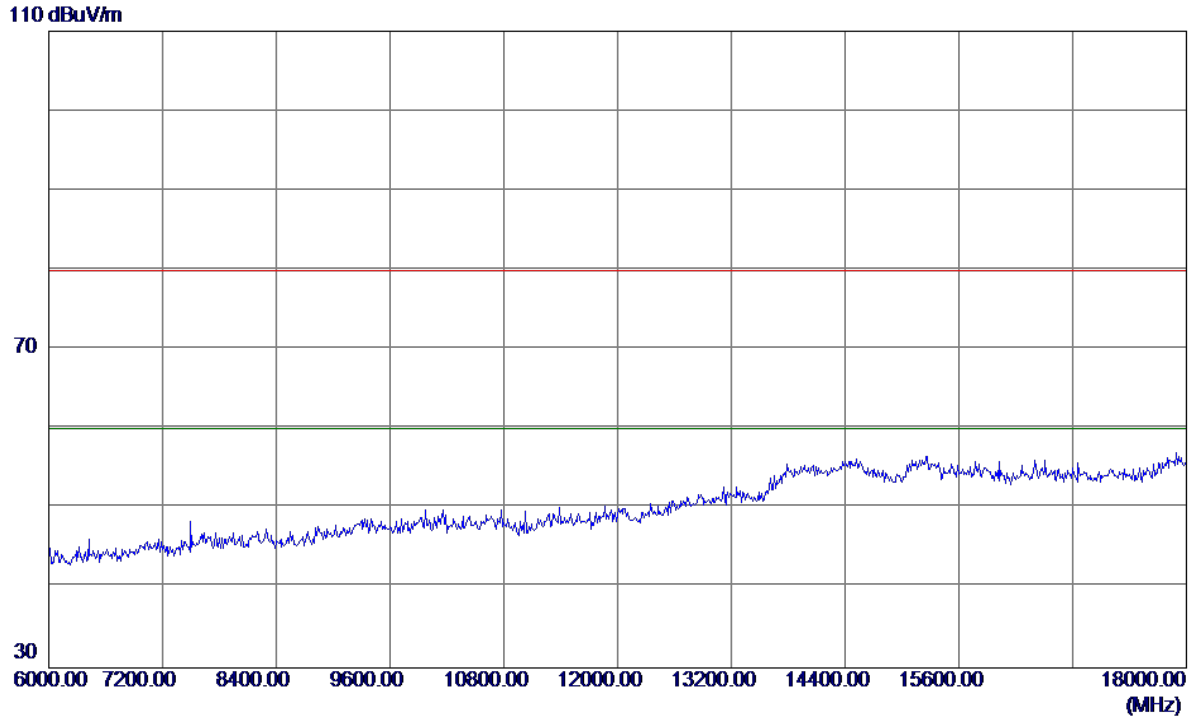


| No. | Freq. | Reading Level | Correct Factor | Measure ment | Limit | Margin | | |
|---|---|---|---|---|---|---|---|---|
| | MHz | dBuV/m | dB | dBuV/m | dBuV/m | dB | Detector | Comment |

| | |
|---|---|
| Orthogonal Axis: | X |
| Test Mode: | UNII-3/TX AC40 Mode 5755MHz |


**Vertical**

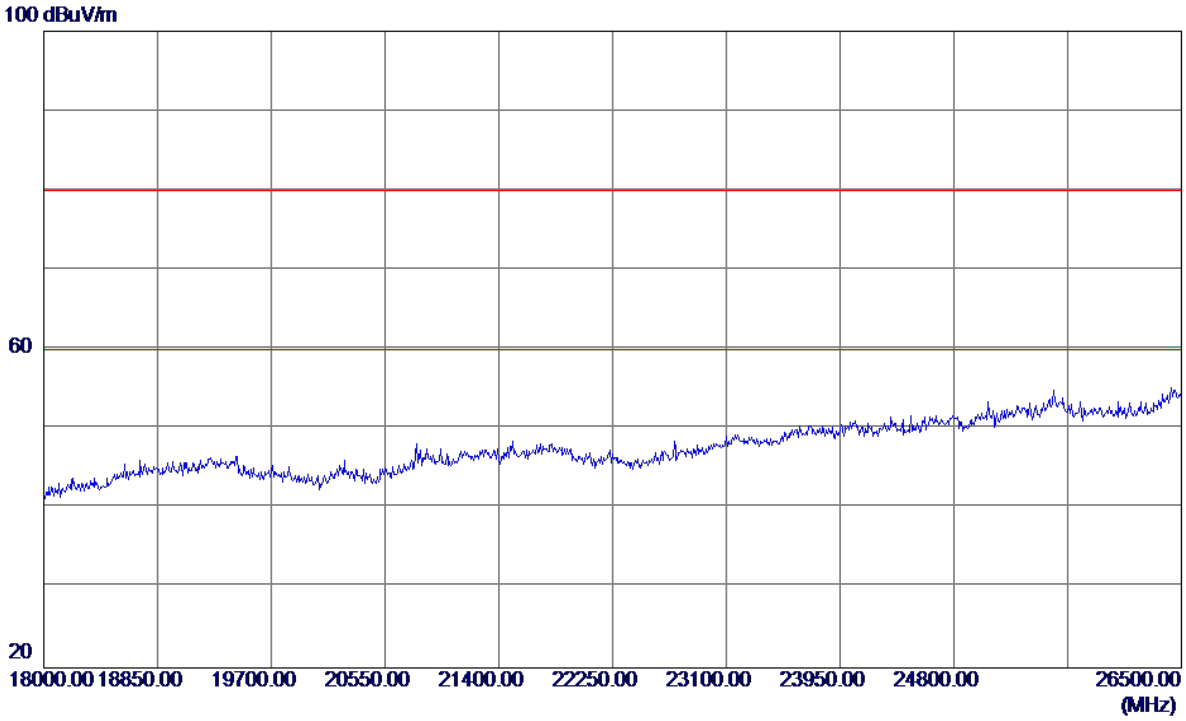


| No. | Freq. | Reading Level | Correct Factor | Measure ment | Limit | Margin | | |
|---|---|---|---|---|---|---|---|---|
| | MHz | dBuV/m | dB | dBuV/m | dBuV/m | dB | Detector | Comment |

| | |
|---|---|
| Orthogonal Axis: | X |
| Test Mode: | UNII-3/TX AC40 Mode 5755MHz |


**Vertical**

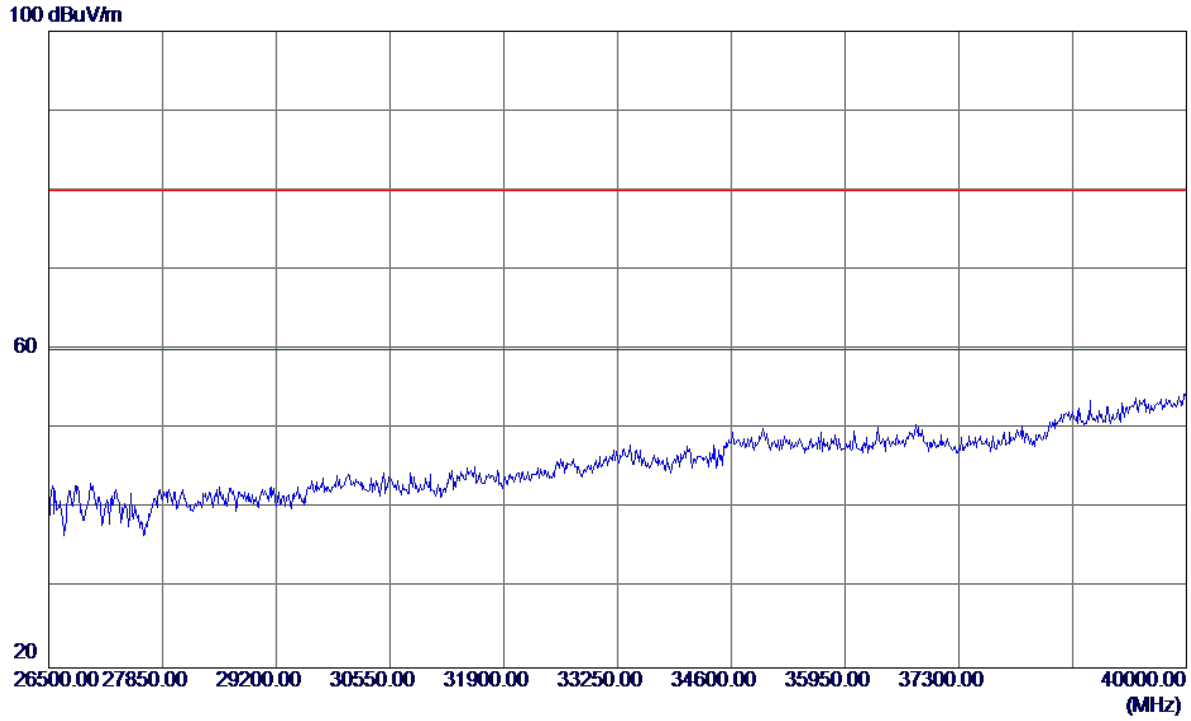


| No. | Freq. | Reading Level | Correct Factor | Measure ment | Limit | Margin | | |
|---|---|---|---|---|---|---|---|---|
| | MHz | dBuV/m | dB | dBuV/m | dBuV/m | dB | Detector | Comment |

| | |
|---|---|
| Orthogonal Axis: | X |
| Test Mode: | UNII-3/TX AC40 Mode 5755MHz |


**Horizontal**

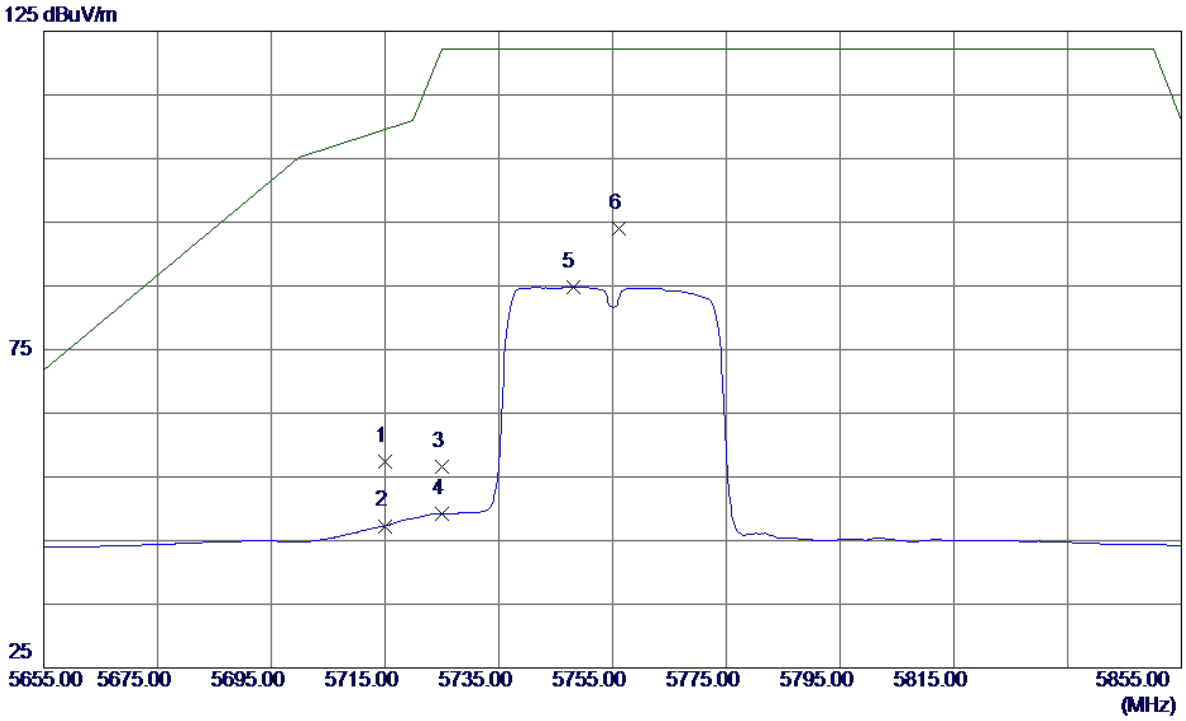


| No. | Freq. | Reading Level | Correct Factor | Measure ment | Limit | Margin | | |
|---|---|---|---|---|---|---|---|---|
| | MHz | dBuV/m | dB | dBuV/m | dBuV/m | dB | Detector | Comment |
| 1 | 5715.0000 | 13.88 | 43.53 | 57.41 | 109.50 | -52.09 | Peak | |
| 2 | 5715.0000 | 3.77 | 43.53 | 47.30 | 109.50 | -62.20 | AVG | |
| 3 | 5725.0000 | 13.09 | 43.56 | 56.65 | 122.30 | -65.65 | Peak | |
| 4 | 5725.0000 | 5.67 | 43.56 | 49.23 | 122.30 | -73.07 | AVG | |
| 5 | 5748.0000 | 41.21 | 43.63 | 84.84 | 122.30 | -37.46 | AVG | |
| 6 * | 5756.2000 | 50.28 | 43.65 | 93.93 | 122.30 | -28.37 | Peak | |

| | |
|---|---|
| Orthogonal Axis: | X |
| Test Mode: | UNII-3/TX AC40 Mode 5755MHz |


**Horizontal**

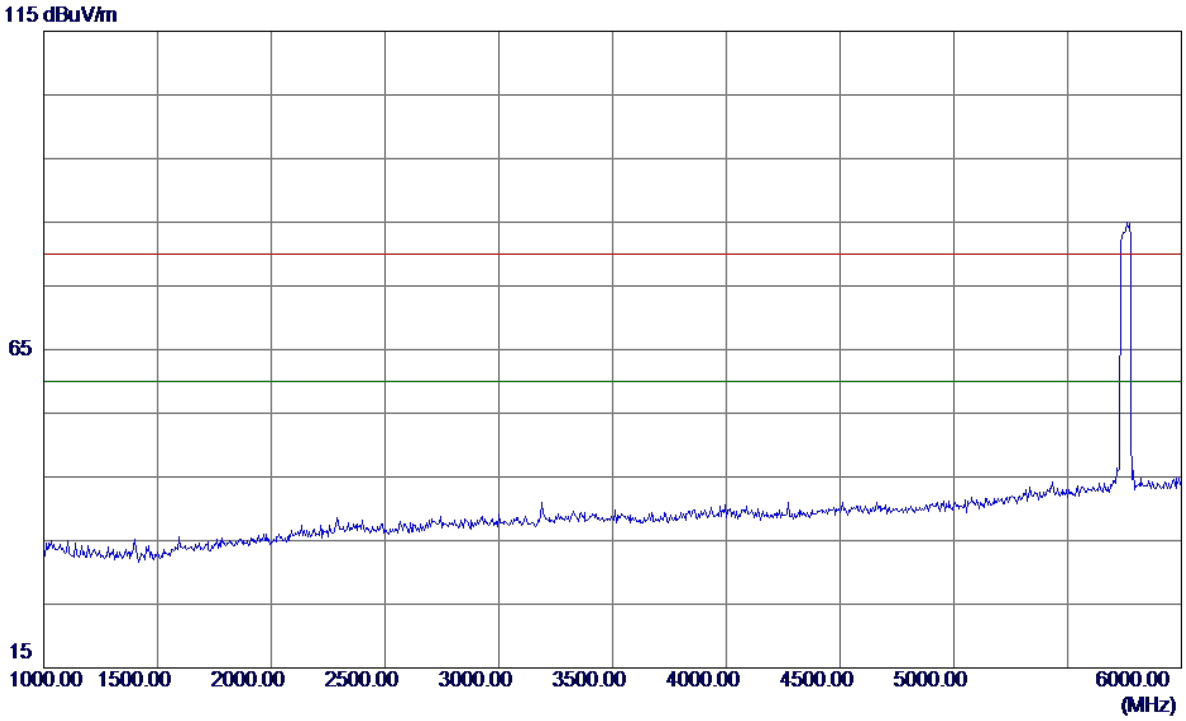


| No. | Freq. | Reading Level | Correct Factor | Measure ment | Limit | Margin | | |
|---|---|---|---|---|---|---|---|---|
| | MHz | dBuV/m | dB | dBuV/m | dBuV/m | dB | Detector | Comment |

| | |
|---|---|
| Orthogonal Axis: | X |
| Test Mode: | UNII-3/TX AC40 Mode 5755MHz |


**Horizontal**

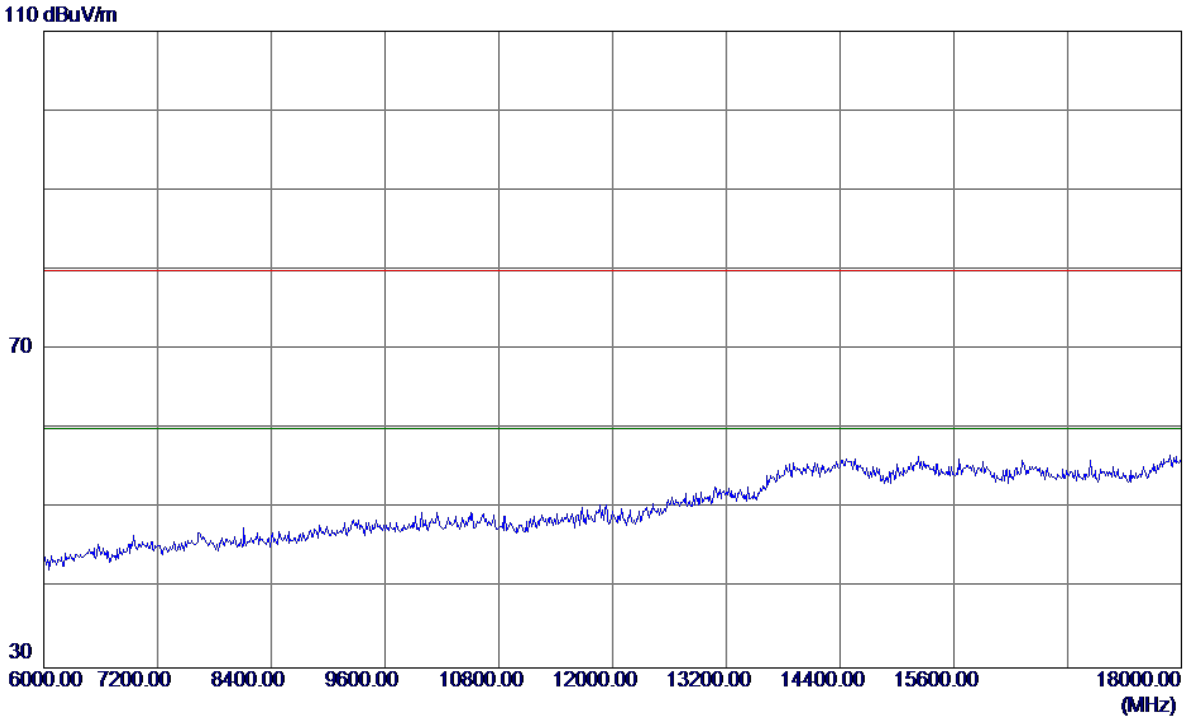


| No. | Freq. | Reading Level | Correct Factor | Measure ment | Limit | Margin | | |
|---|---|---|---|---|---|---|---|---|
| | MHz | dBuV/m | dB | dBuV/m | dBuV/m | dB | Detector | Comment |

| | |
|---|---|
| Orthogonal Axis: | X |
| Test Mode: | UNII-3/TX AC40 Mode 5755MHz |


**Horizontal**

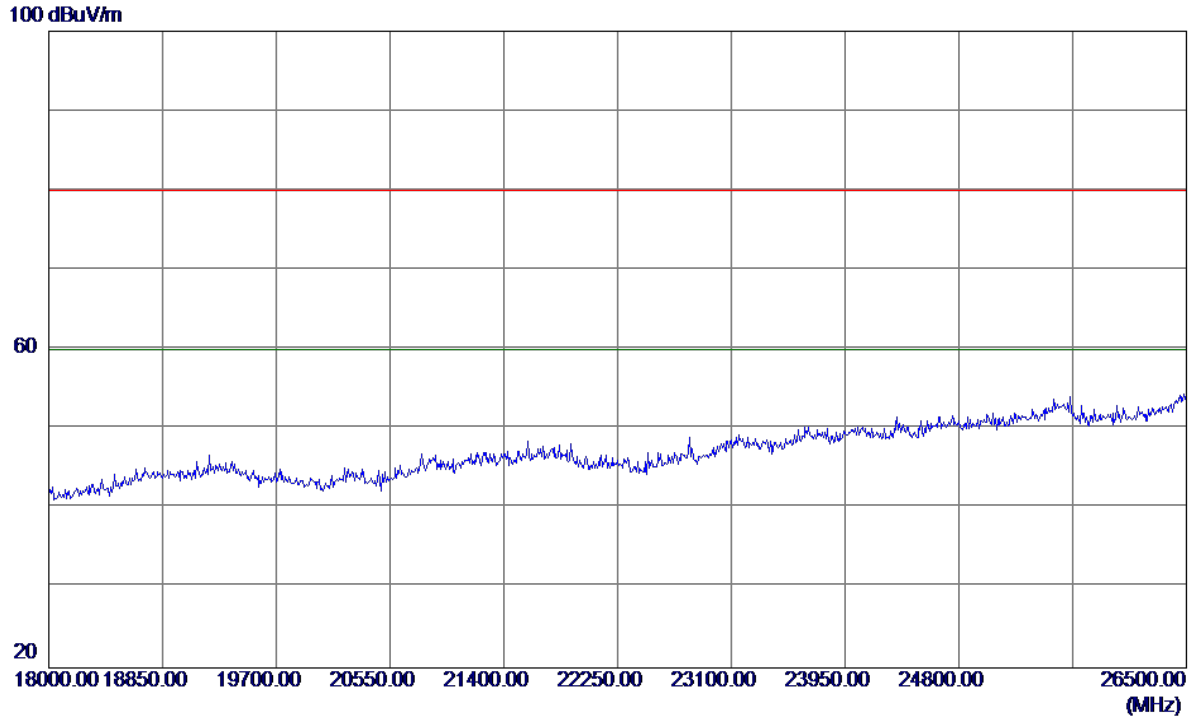


| No. | Freq. | Reading Level | Correct Factor | Measure ment | Limit | Margin | | |
|---|---|---|---|---|---|---|---|---|
| | MHz | dBuV/m | dB | dBuV/m | dBuV/m | dB | Detector | Comment |

| | |
|---|---|
| Orthogonal Axis: | X |
| Test Mode: | UNII-3/TX AC40 Mode 5755MHz |


**Horizontal**

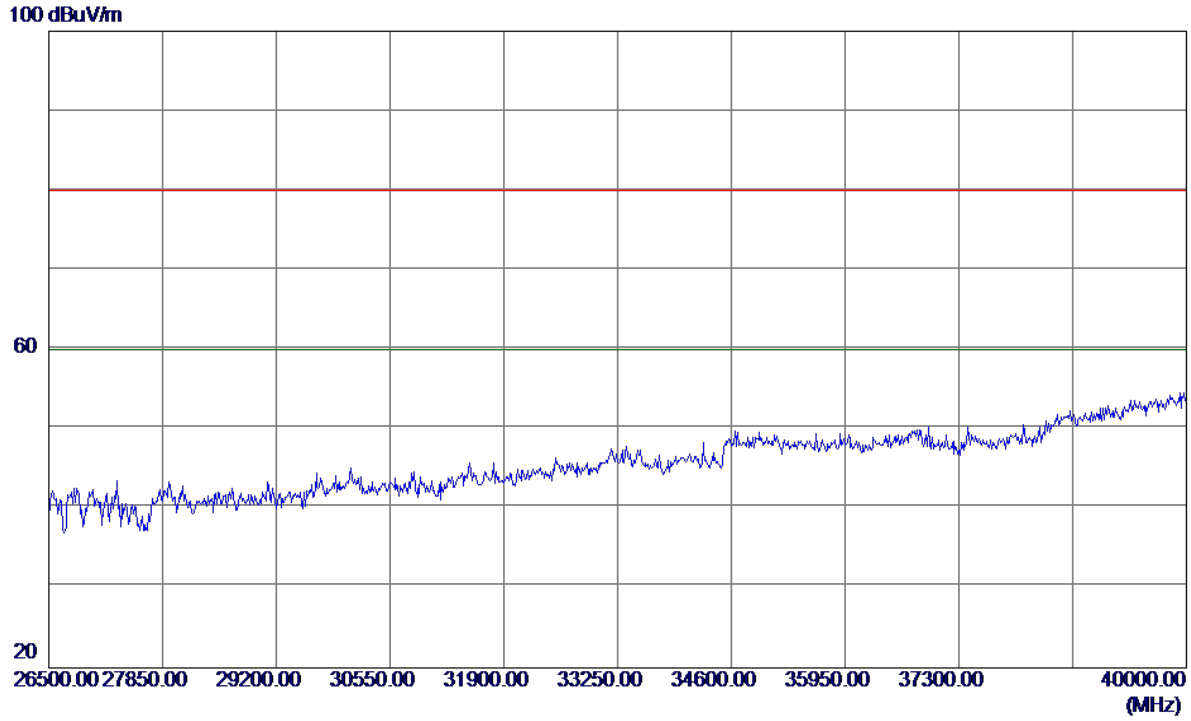


| No. | Freq. | Reading Level | Correct Factor | Measure ment | Limit | Margin | | |
|---|---|---|---|---|---|---|---|---|
| | MHz | dBuV/m | dB | dBuV/m | dBuV/m | dB | Detector | Comment |

| | |
|---|---|
| Orthogonal Axis: | X |
| Test Mode: | UNII-3/TX AC40 Mode 5795MHz |


**Vertical**

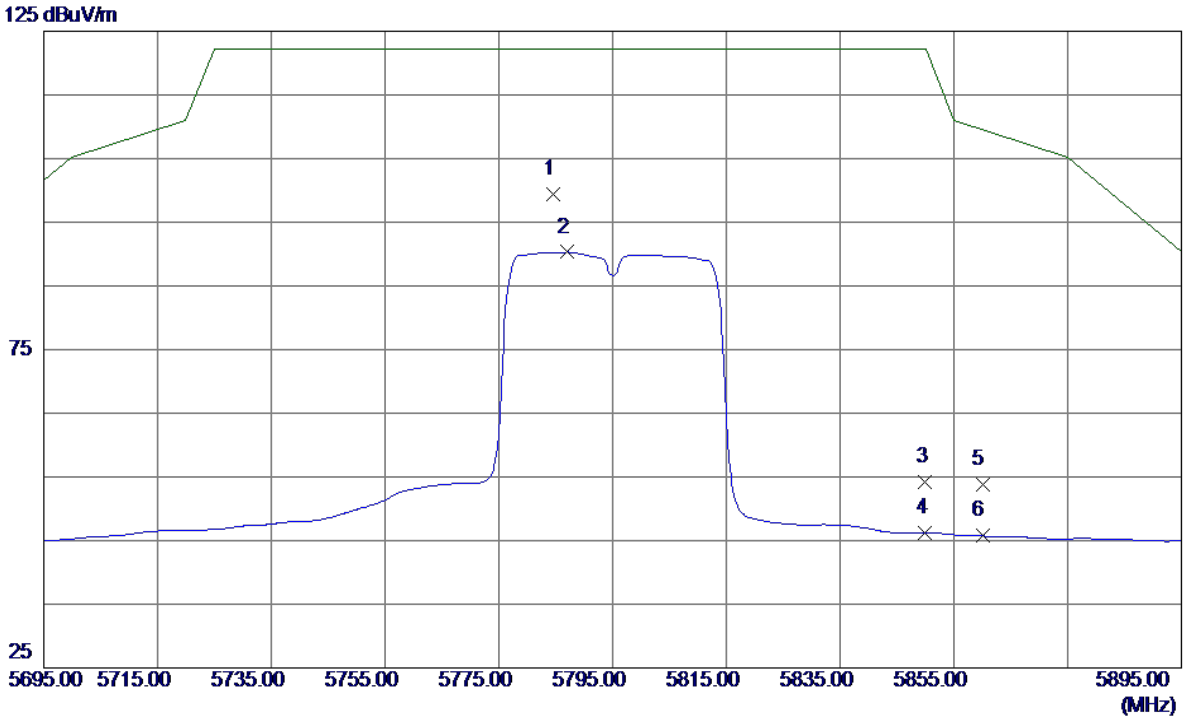


| No. | Freq. | Reading Level | Correct Factor | Measure ment | Limit | Margin | | |
|---|---|---|---|---|---|---|---|---|
| | MHz | dBuV/m | dB | dBuV/m | dBuV/m | dB | Detector | Comment |
| 1 * | 5784.6000 | 55.66 | 43.74 | 99.40 | 122.30 | -22.90 | Peak | |
| 2 | 5787.0000 | 46.55 | 43.75 | 90.30 | 122.30 | -32.00 | AVG | |
| 3 | 5850.0000 | 10.20 | 43.94 | 54.14 | 122.30 | -68.16 | Peak | |
| 4 | 5850.0000 | 2.28 | 43.94 | 46.22 | 122.30 | -76.08 | AVG | |
| 5 | 5860.0000 | 9.80 | 43.97 | 53.77 | 109.50 | -55.73 | Peak | |
| 6 | 5860.0000 | 1.78 | 43.97 | 45.75 | 109.50 | -63.75 | AVG | |

| | |
|---|---|
| Orthogonal Axis: | X |
| Test Mode: | UNII-3/TX AC40 Mode 5795MHz |


**Vertical**

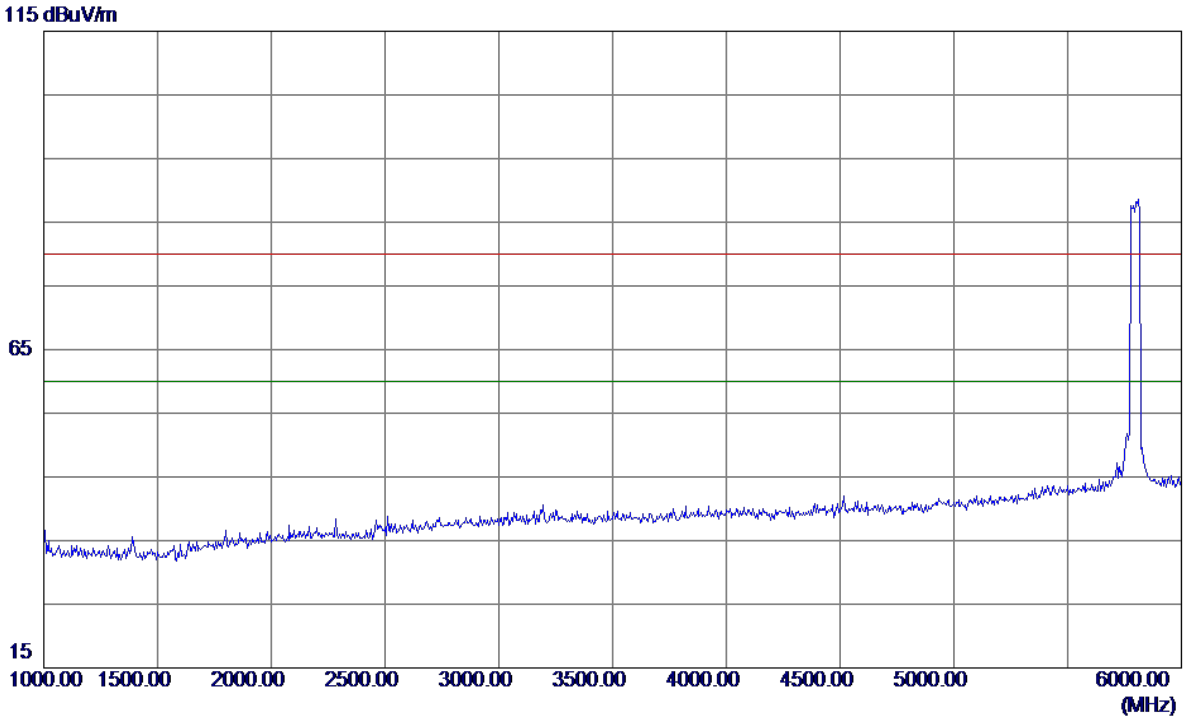


| No. | Freq. | Reading Level | Correct Factor | Measure ment | Limit | Margin | | |
|---|---|---|---|---|---|---|---|---|
| | MHz | dBuV/m | dB | dBuV/m | dBuV/m | dB | Detector | Comment |

| | |
|---|---|
| Orthogonal Axis: | X |
| Test Mode: | UNII-3/TX AC40 Mode 5795MHz |


**Vertical**

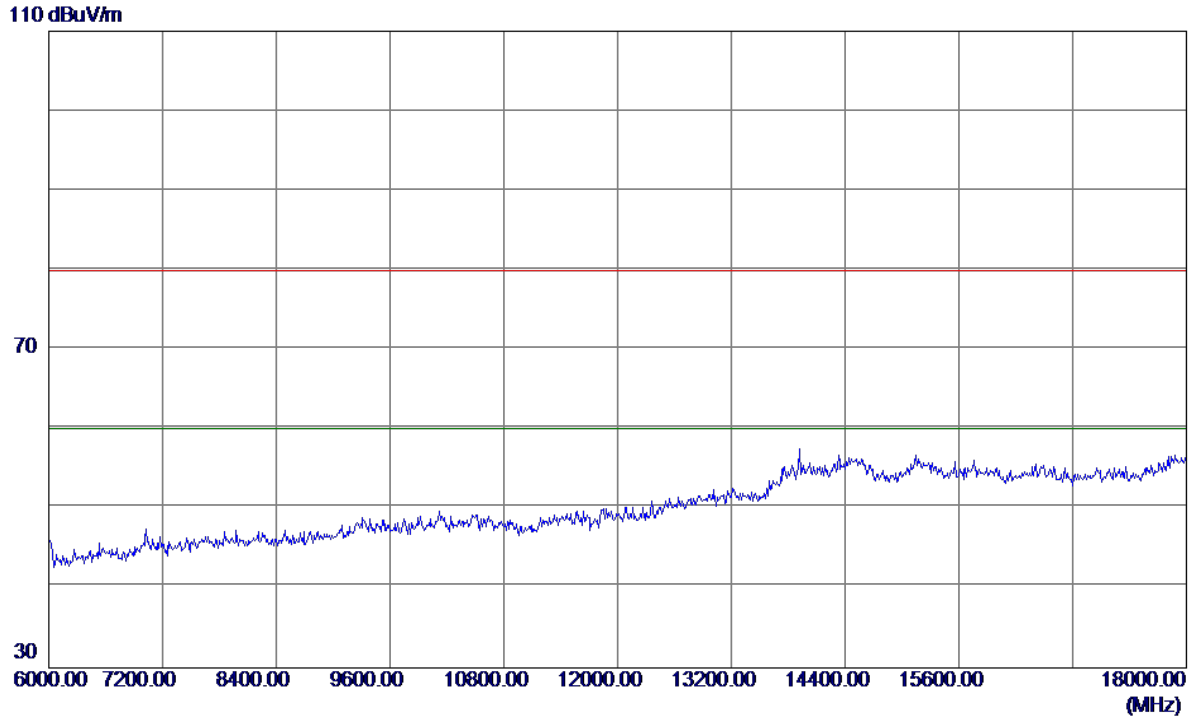


| No. | Freq. | Reading Level | Correct Factor | Measure ment | Limit | Margin | | |
|---|---|---|---|---|---|---|---|---|
| | MHz | dBuV/m | dB | dBuV/m | dBuV/m | dB | Detector | Comment |

| | |
|---|---|
| Orthogonal Axis: | X |
| Test Mode: | UNII-3/TX AC40 Mode 5795MHz |


**Vertical**

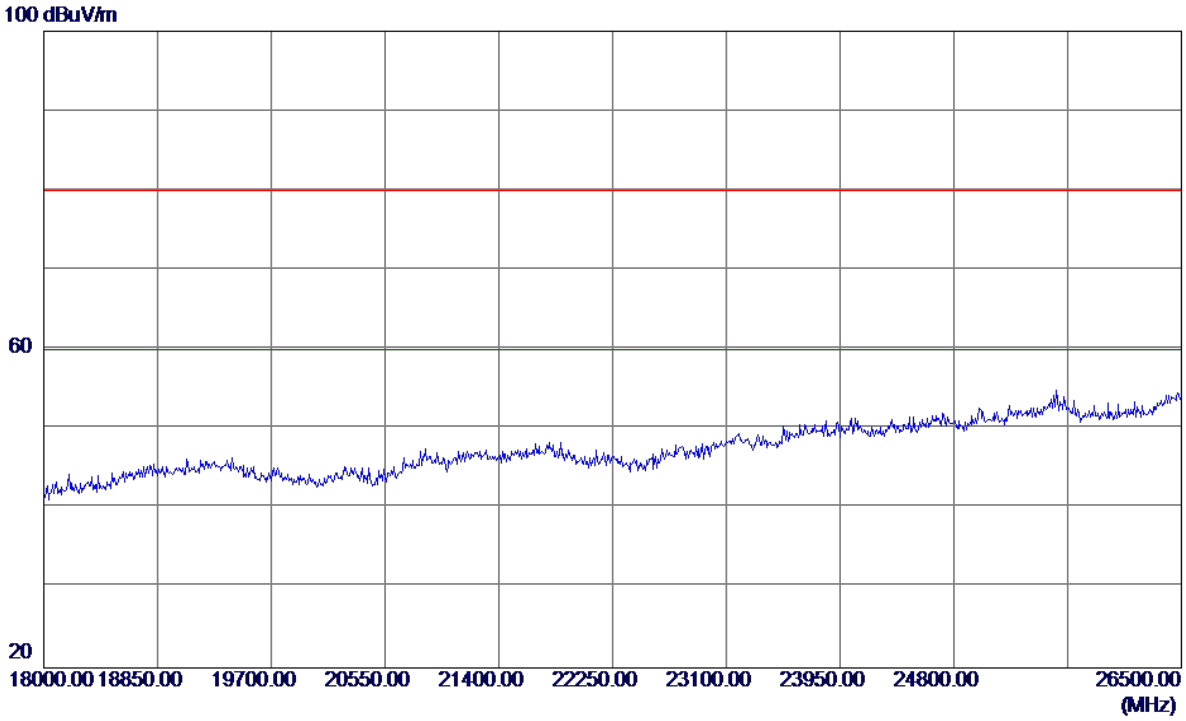


| No. | Freq. | Reading Level | Correct Factor | Measure ment | Limit | Margin | | |
|---|---|---|---|---|---|---|---|---|
| | MHz | dBuV/m | dB | dBuV/m | dBuV/m | dB | Detector | Comment |

| | |
|---|---|
| Orthogonal Axis: | X |
| Test Mode: | UNII-3/TX AC40 Mode 5795MHz |


**Vertical**

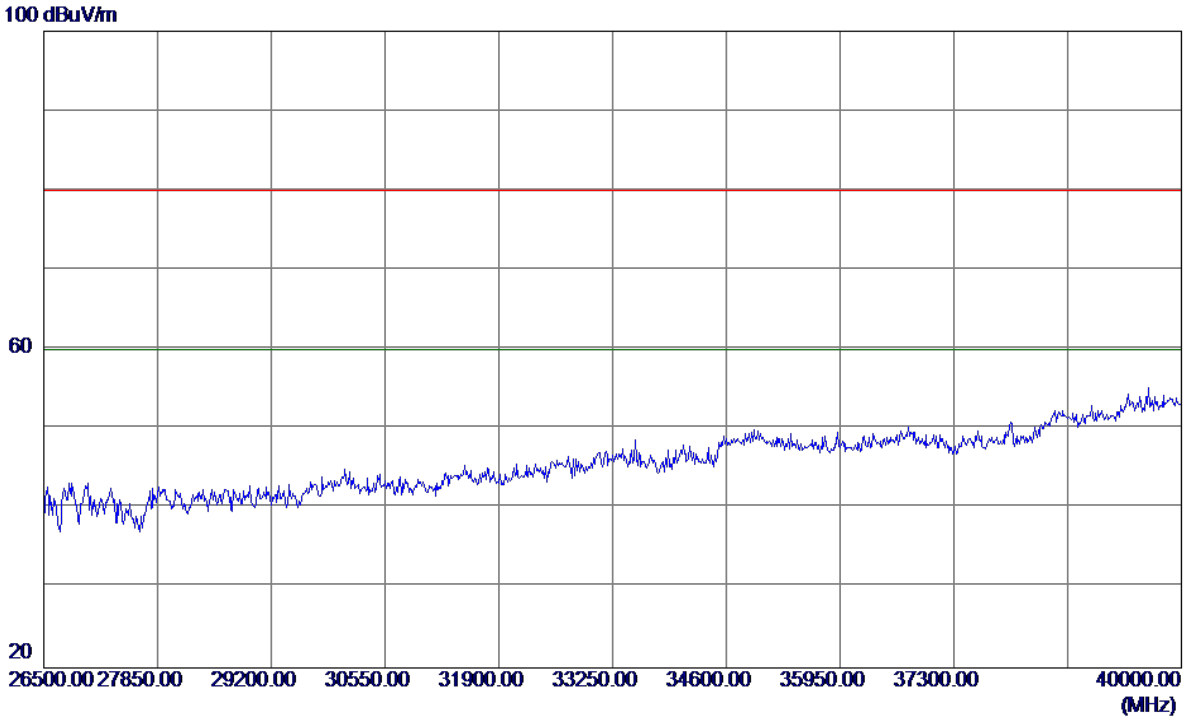


| No. | Freq. | Reading Level | Correct Factor | Measure ment | Limit | Margin | | |
|---|---|---|---|---|---|---|---|---|
| | MHz | dBuV/m | dB | dBuV/m | dBuV/m | dB | Detector | Comment |

| | |
|---|---|
| Orthogonal Axis: | X |
| Test Mode: | UNII-3/TX AC40 Mode 5795MHz |


**Horizontal**

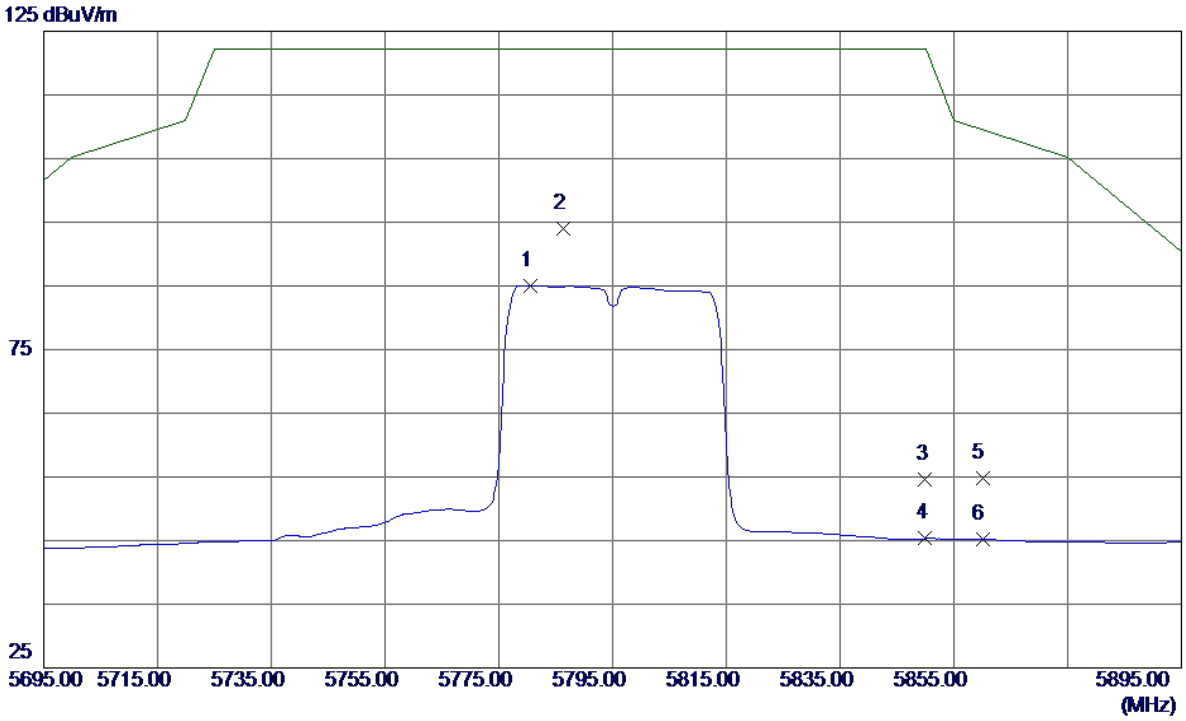


| No. | Freq. | Reading Level | Correct Factor | Measure ment | Limit | Margin | | |
|---|---|---|---|---|---|---|---|---|
| | MHz | dBuV/m | dB | dBuV/m | dBuV/m | dB | Detector | Comment |
| 1 | 5780.6000 | 41.33 | 43.73 | 85.06 | 122.30 | -37.24 | AVG | |
| 2 * | 5786.4000 | 50.17 | 43.74 | 93.91 | 122.30 | -28.39 | Peak | |
| 3 | 5850.0000 | 10.71 | 43.94 | 54.65 | 122.30 | -67.65 | Peak | |
| 4 | 5850.0000 | 1.37 | 43.94 | 45.31 | 122.30 | -76.99 | AVG | |
| 5 | 5860.0000 | 10.81 | 43.97 | 54.78 | 109.50 | -54.72 | Peak | |
| 6 | 5860.0000 | 1.28 | 43.97 | 45.25 | 109.50 | -64.25 | AVG | |

| | |
|---|---|
| Orthogonal Axis: | X |
| Test Mode: | UNII-3/TX AC40 Mode 5795MHz |


**Horizontal**

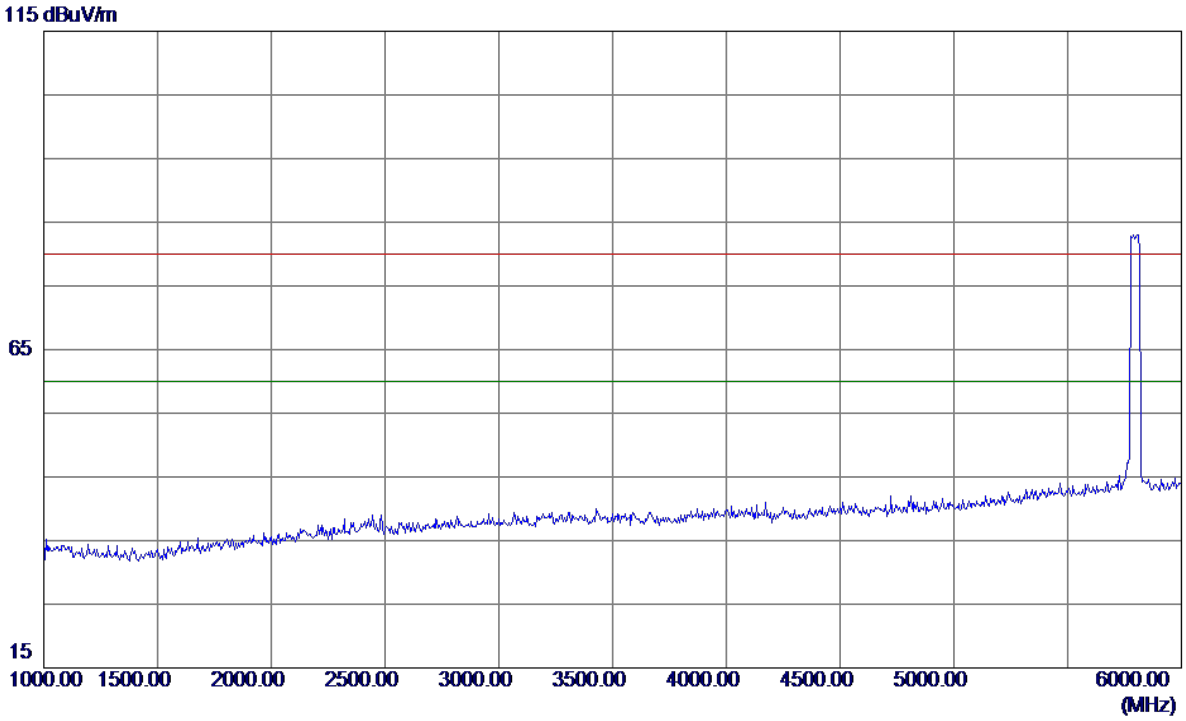


| No. | Freq. | Reading Level | Correct Factor | Measure ment | Limit | Margin | | |
|---|---|---|---|---|---|---|---|---|
| | MHz | dBuV/m | dB | dBuV/m | dBuV/m | dB | Detector | Comment |

| | |
|---|---|
| Orthogonal Axis: | X |
| Test Mode: | UNII-3/TX AC40 Mode 5795MHz |


**Horizontal**

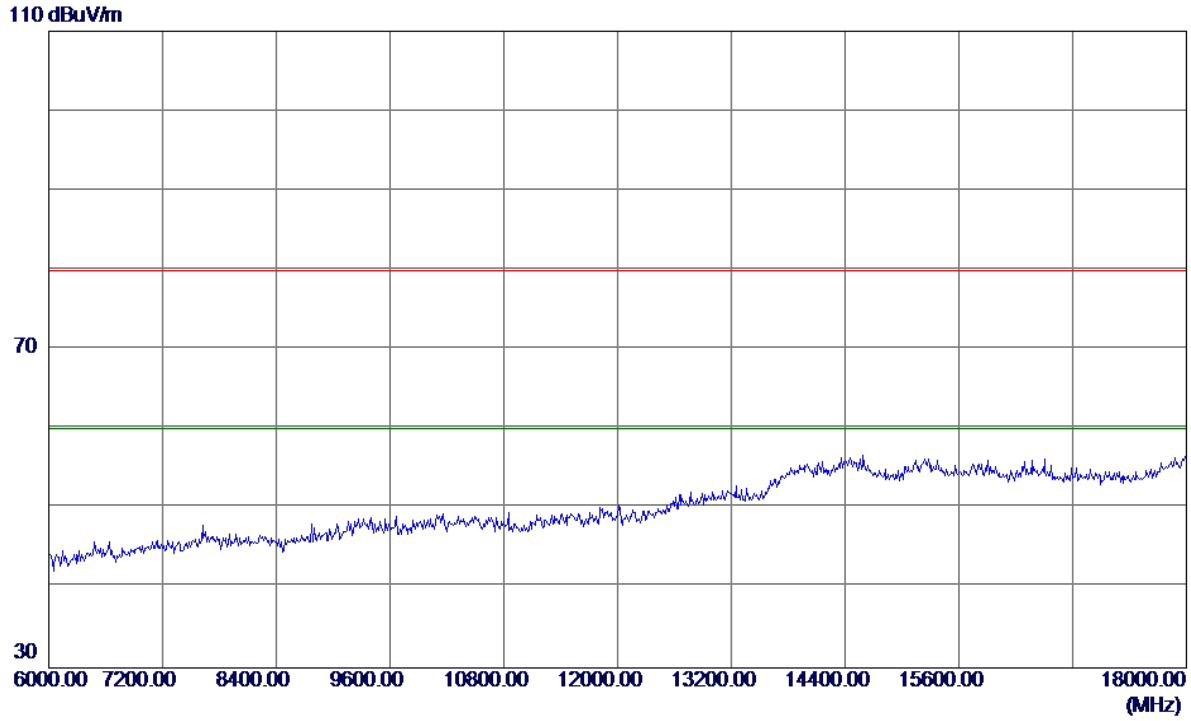


| No. | Freq. | Reading Level | Correct Factor | Measure ment | Limit | Margin | | |
|---|---|---|---|---|---|---|---|---|
| | MHz | dBuV/m | dB | dBuV/m | dBuV/m | dB | Detector | Comment |

| | |
|---|---|
| Orthogonal Axis: | X |
| Test Mode: | UNII-3/TX AC40 Mode 5795MHz |


**Horizontal**

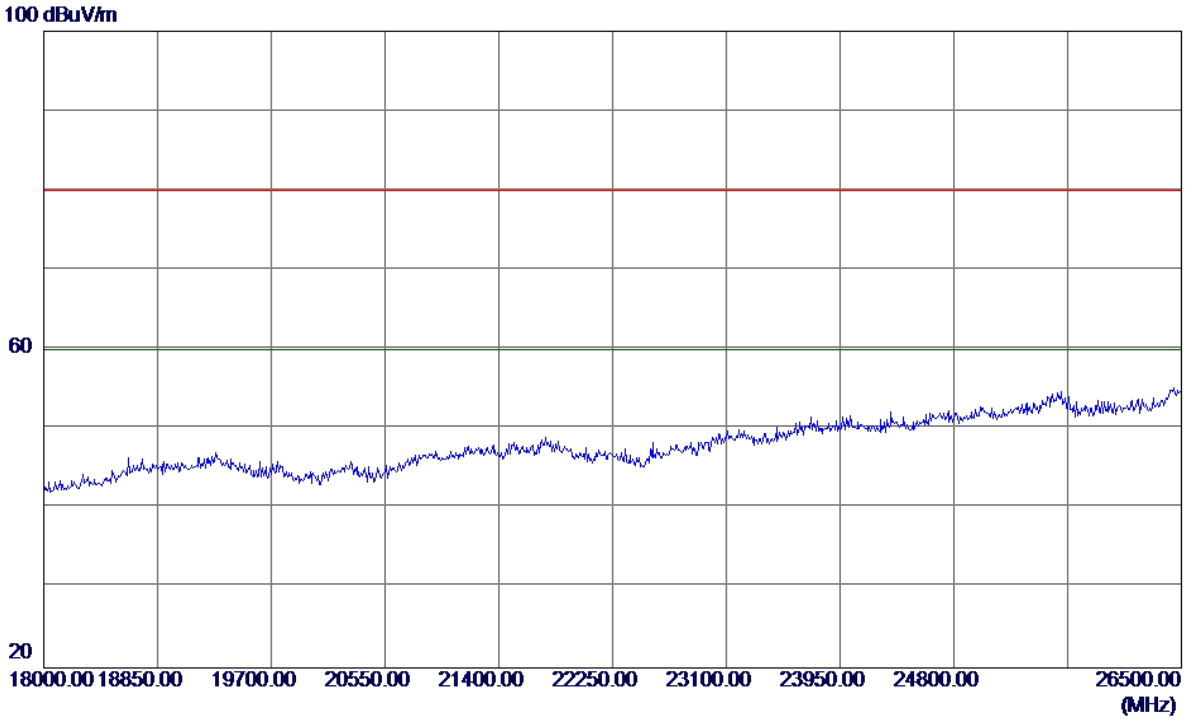


| No. | Freq. | Reading Level | Correct Factor | Measure ment | Limit | Margin | | |
|---|---|---|---|---|---|---|---|---|
| | MHz | dBuV/m | dB | dBuV/m | dBuV/m | dB | Detector | Comment |

| | |
|---|---|
| Orthogonal Axis: | X |
| Test Mode: | UNII-3/TX AC40 Mode 5795MHz |


**Horizontal**

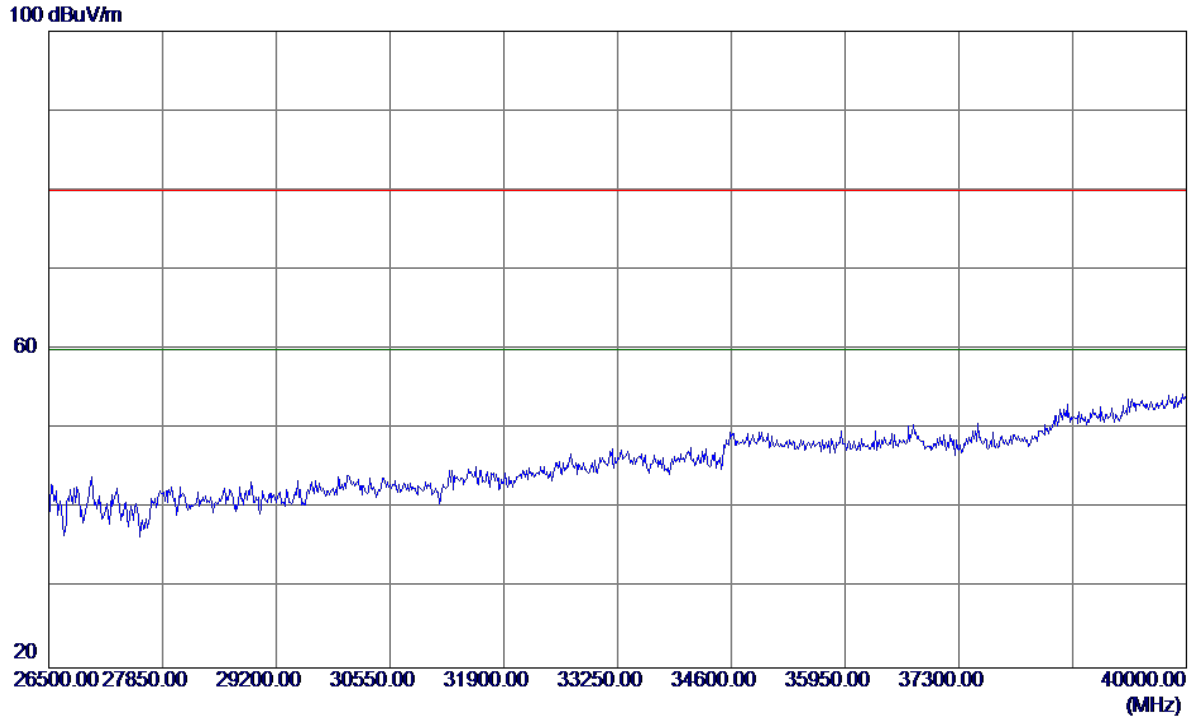


| No. | Freq. | Reading Level | Correct Factor | Measure ment | Limit | Margin | | |
|---|---|---|---|---|---|---|---|---|
| | MHz | dBuV/m | dB | dBuV/m | dBuV/m | dB | Detector | Comment |

| | |
|---|---|
| Orthogonal Axis: | X |
| Test Mode: | UNII-3/TX AC80 Mode 5775MHz |


**Vertical**

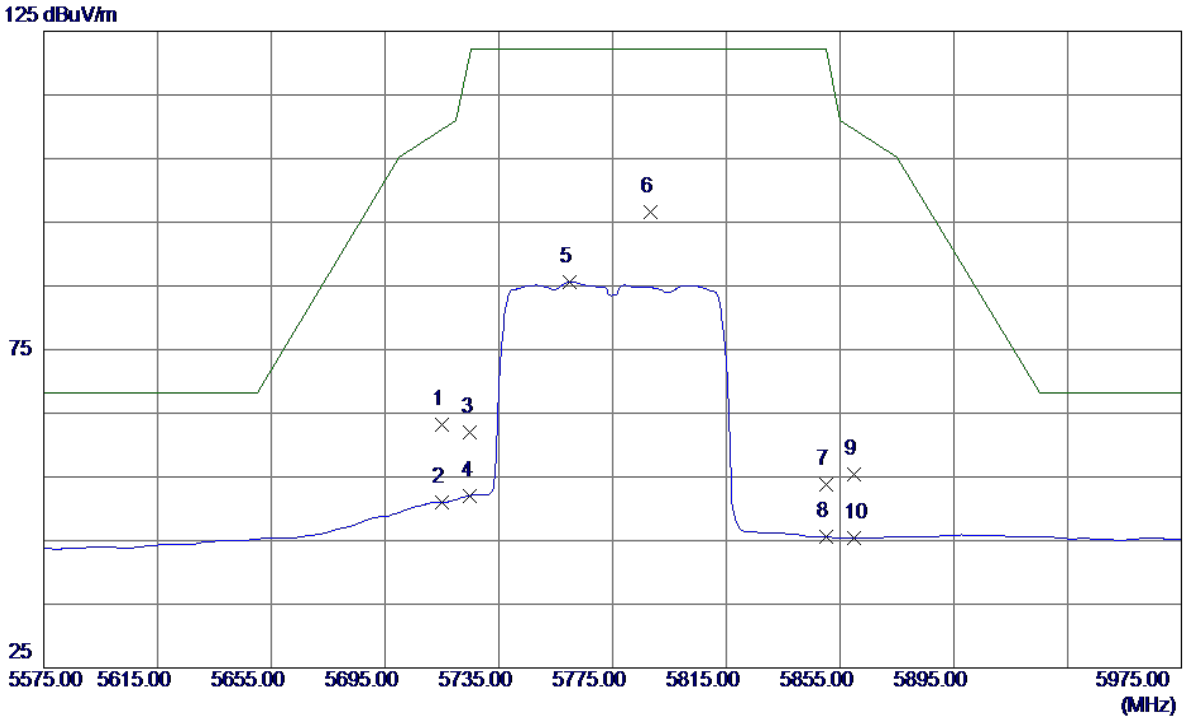


| No. | Freq. | Reading Level | Correct Factor | Measure ment | Limit | Margin | | |
|---|---|---|---|---|---|---|---|---|
| | MHz | dBuV/m | dB | dBuV/m | dBuV/m | dB | Detector | Comment |
| 1 | 5715.0000 | 19.67 | 43.53 | 63.20 | 109.50 | -46.30 | Peak | |
| 2 | 5715.0000 | 7.44 | 43.53 | 50.97 | 109.50 | -58.53 | AVG | |
| 3 | 5725.0000 | 18.39 | 43.56 | 61.95 | 122.30 | -60.35 | Peak | |
| 4 | 5725.0000 | 8.47 | 43.56 | 52.03 | 122.30 | -70.27 | AVG | |
| 5 | 5759.8000 | 41.90 | 43.66 | 85.56 | 122.30 | -36.74 | AVG | |
| 6 * | 5788.2000 | 52.93 | 43.75 | 96.68 | 122.30 | -25.62 | Peak | |
| 7 | 5850.0000 | 9.94 | 43.94 | 53.88 | 122.30 | -68.42 | Peak | |
| 8 | 5850.0000 | 1.58 | 43.94 | 45.52 | 122.30 | -76.78 | AVG | |
| 9 | 5860.0000 | 11.39 | 43.97 | 55.36 | 109.50 | -54.14 | Peak | |
| 10 | 5860.0000 | 1.46 | 43.97 | 45.43 | 109.50 | -64.07 | AVG | |

| | |
|---|---|
| Orthogonal Axis: | X |
| Test Mode: | UNII-3/TX AC80 Mode 5775MHz |


**Vertical**

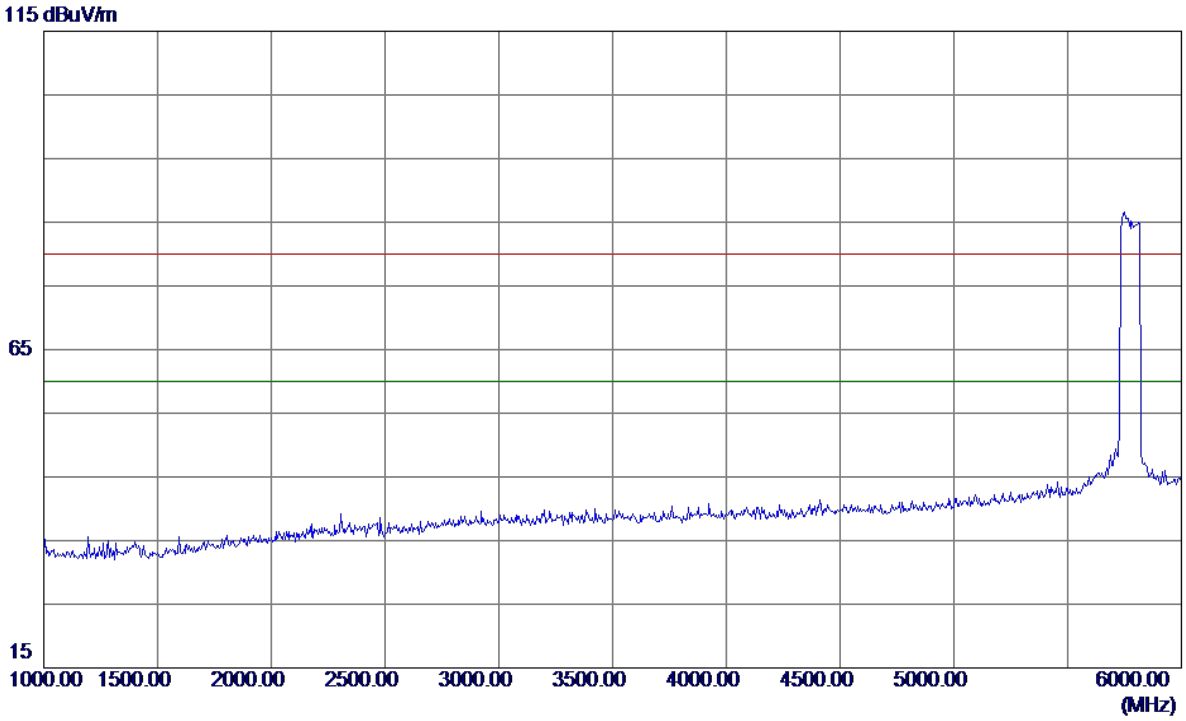


| No. | Freq. | Reading Level | Correct Factor | Measure ment | Limit | Margin | | |
|---|---|---|---|---|---|---|---|---|
| | MHz | dBuV/m | dB | dBuV/m | dBuV/m | dB | Detector | Comment |

| | |
|---|---|
| Orthogonal Axis: | X |
| Test Mode: | UNII-3/TX AC80 Mode 5775MHz |


**Vertical**

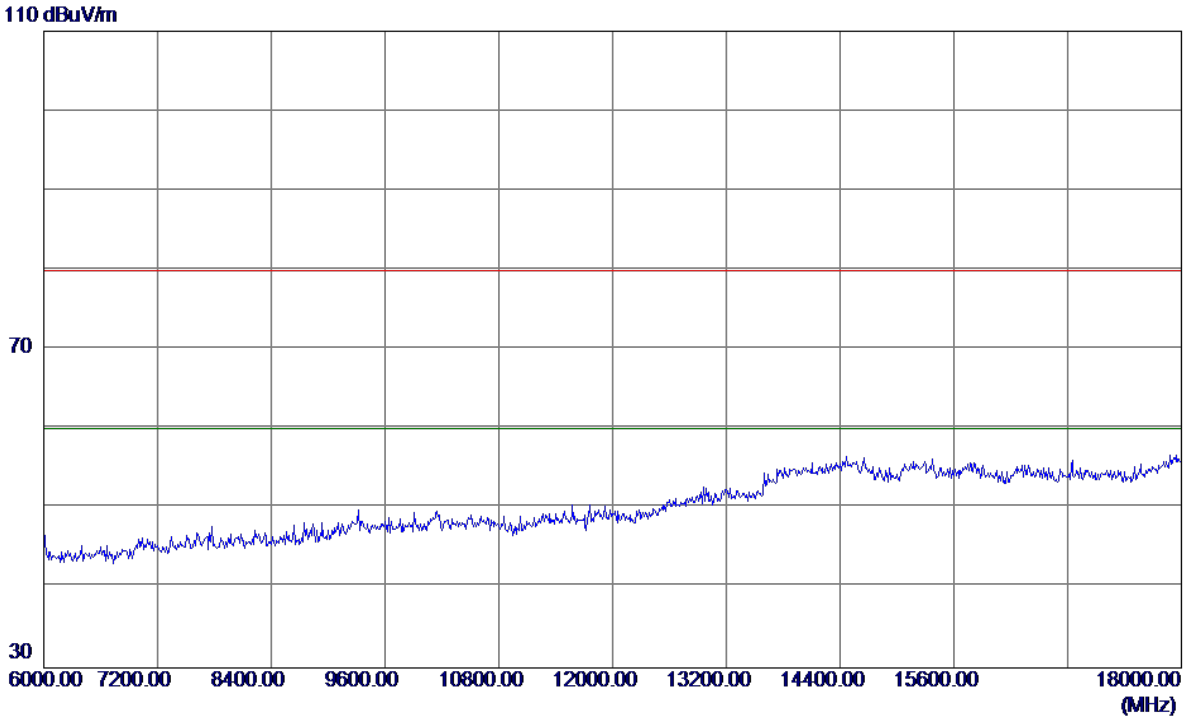


| No. | Freq. | Reading Level | Correct Factor | Measure ment | Limit | Margin | | |
|---|---|---|---|---|---|---|---|---|
| | MHz | dBuV/m | dB | dBuV/m | dBuV/m | dB | Detector | Comment |

| | |
|---|---|
| Orthogonal Axis: | X |
| Test Mode: | UNII-3/TX AC80 Mode 5775MHz |


**Vertical**

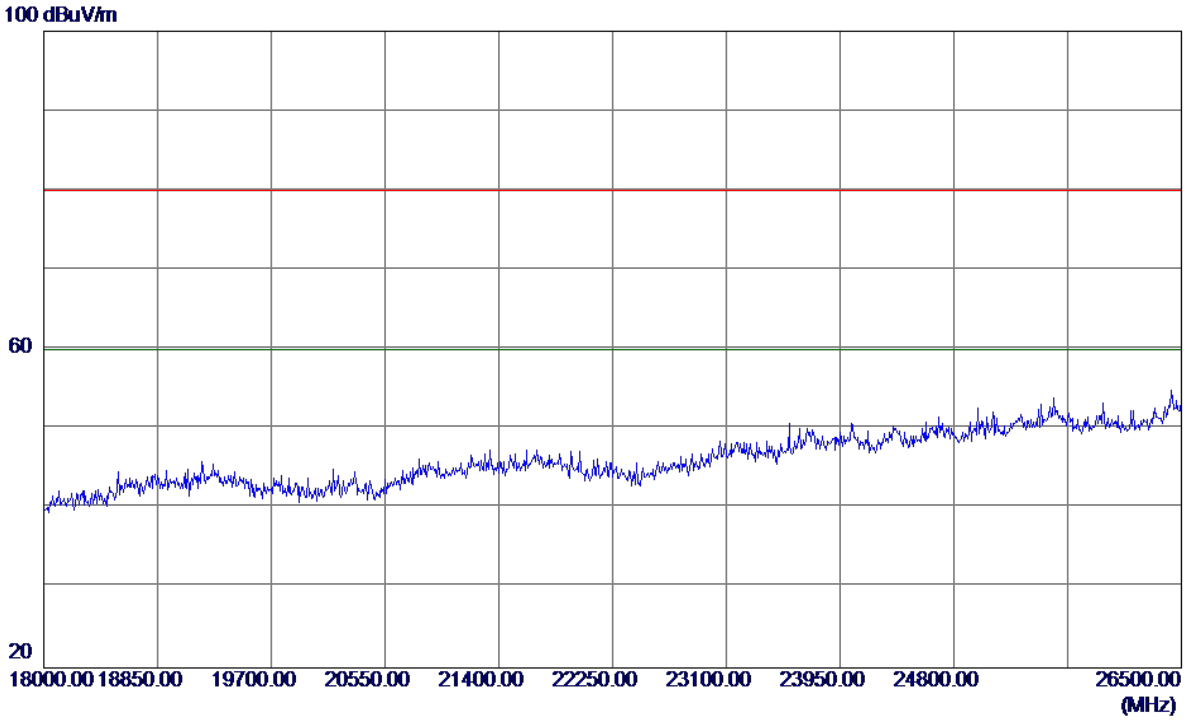


| No. | Freq. | Reading Level | Correct Factor | Measure ment | Limit | Margin | | |
|---|---|---|---|---|---|---|---|---|
| | MHz | dBuV/m | dB | dBuV/m | dBuV/m | dB | Detector | Comment |

| | |
|---|---|
| Orthogonal Axis: | X |
| Test Mode: | UNII-3/TX AC80 Mode 5775MHz |


**Vertical**

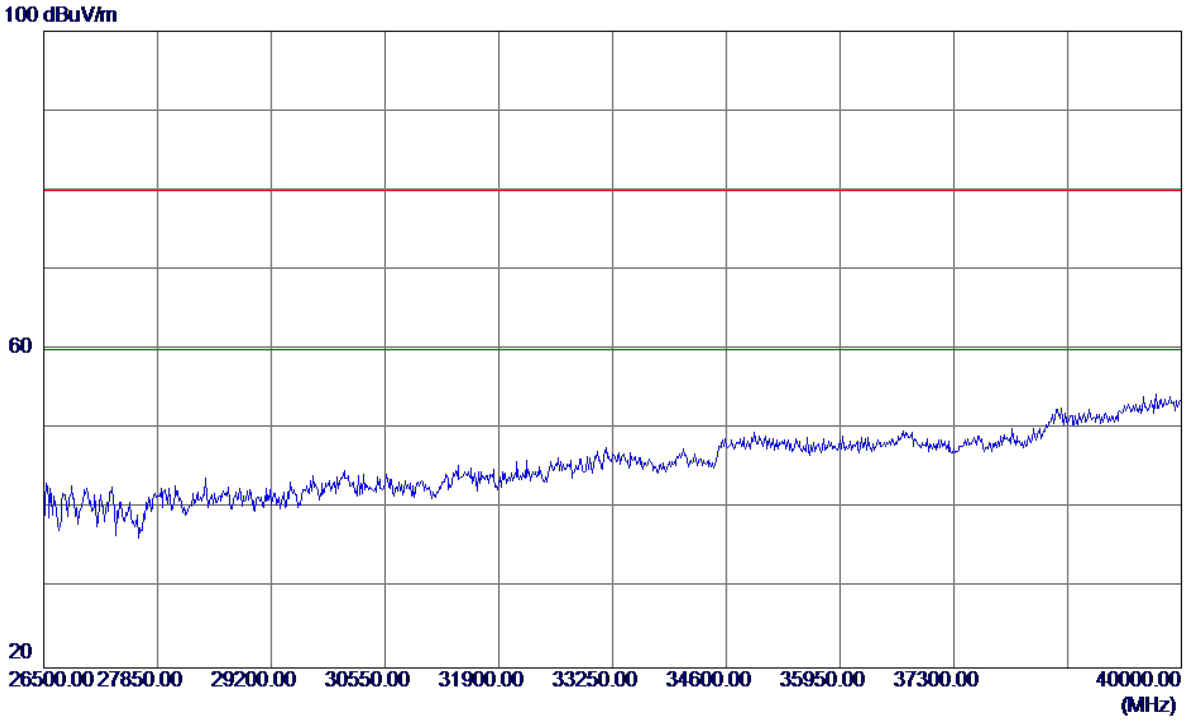


| No. | Freq. | Reading Level | Correct Factor | Measure ment | Limit | Margin | | |
|---|---|---|---|---|---|---|---|---|
| | MHz | dBuV/m | dB | dBuV/m | dBuV/m | dB | Detector | Comment |

| | |
|---|---|
| Orthogonal Axis: | X |
| Test Mode: | UNII-3/TX AC80 Mode 5775MHz |


**Horizontal**

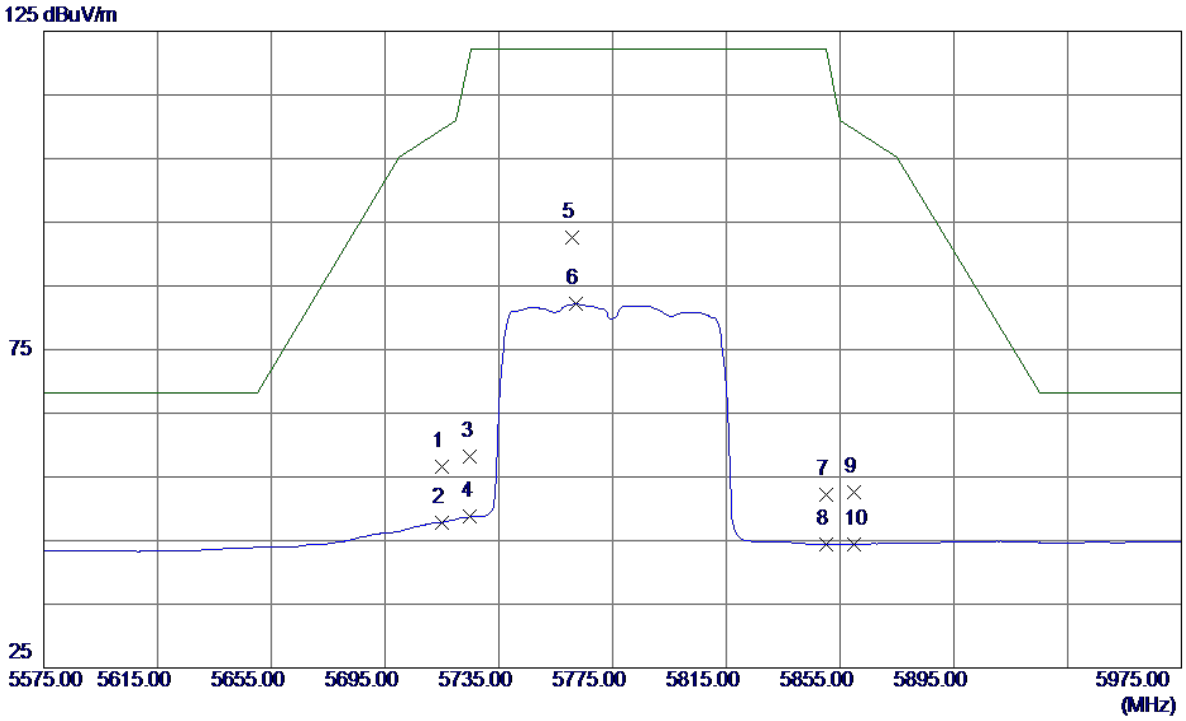


| No. | Freq. | Reading Level | Correct Factor | Measure ment | Limit | Margin | | |
|---|---|---|---|---|---|---|---|---|
| | MHz | dBuV/m | dB | dBuV/m | dBuV/m | dB | Detector | Comment |
| 1 | 5715.0000 | 13.06 | 43.53 | 56.59 | 109.50 | -52.91 | Peak | |
| 2 | 5715.0000 | 4.32 | 43.53 | 47.85 | 109.50 | -61.65 | AVG | |
| 3 | 5725.0000 | 14.72 | 43.56 | 58.28 | 122.30 | -64.02 | Peak | |
| 4 | 5725.0000 | 5.16 | 43.56 | 48.72 | 122.30 | -73.58 | AVG | |
| 5 * | 5760.6000 | 48.99 | 43.67 | 92.66 | 122.30 | -29.64 | Peak | |
| 6 | 5762.2000 | 38.48 | 43.67 | 82.15 | 122.30 | -40.15 | AVG | |
| 7 | 5850.0000 | 8.33 | 43.94 | 52.27 | 122.30 | -70.03 | Peak | |
| 8 | 5850.0000 | 0.54 | 43.94 | 44.48 | 122.30 | -77.82 | AVG | |
| 9 | 5860.0000 | 8.55 | 43.97 | 52.52 | 109.50 | -56.98 | Peak | |
| 10 | 5860.0000 | 0.50 | 43.97 | 44.47 | 109.50 | -65.03 | AVG | |

| | |
|---|---|
| Orthogonal Axis: | X |
| Test Mode: | UNII-3/TX AC80 Mode 5775MHz |


**Horizontal**

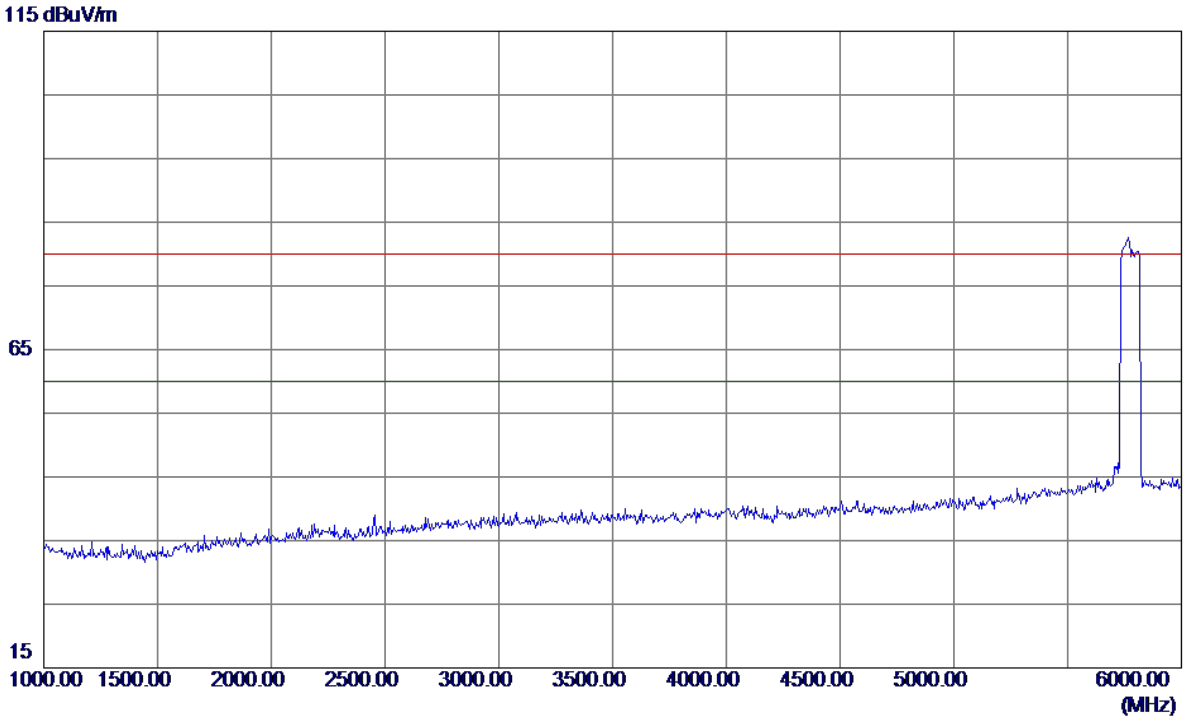


| No. | Freq. | Reading Level | Correct Factor | Measure ment | Limit | Margin | | |
|---|---|---|---|---|---|---|---|---|
| | MHz | dBuV/m | dB | dBuV/m | dBuV/m | dB | Detector | Comment |

| | |
|---|---|
| Orthogonal Axis: | X |
| Test Mode: | UNII-3/TX AC80 Mode 5775MHz |


**Horizontal**

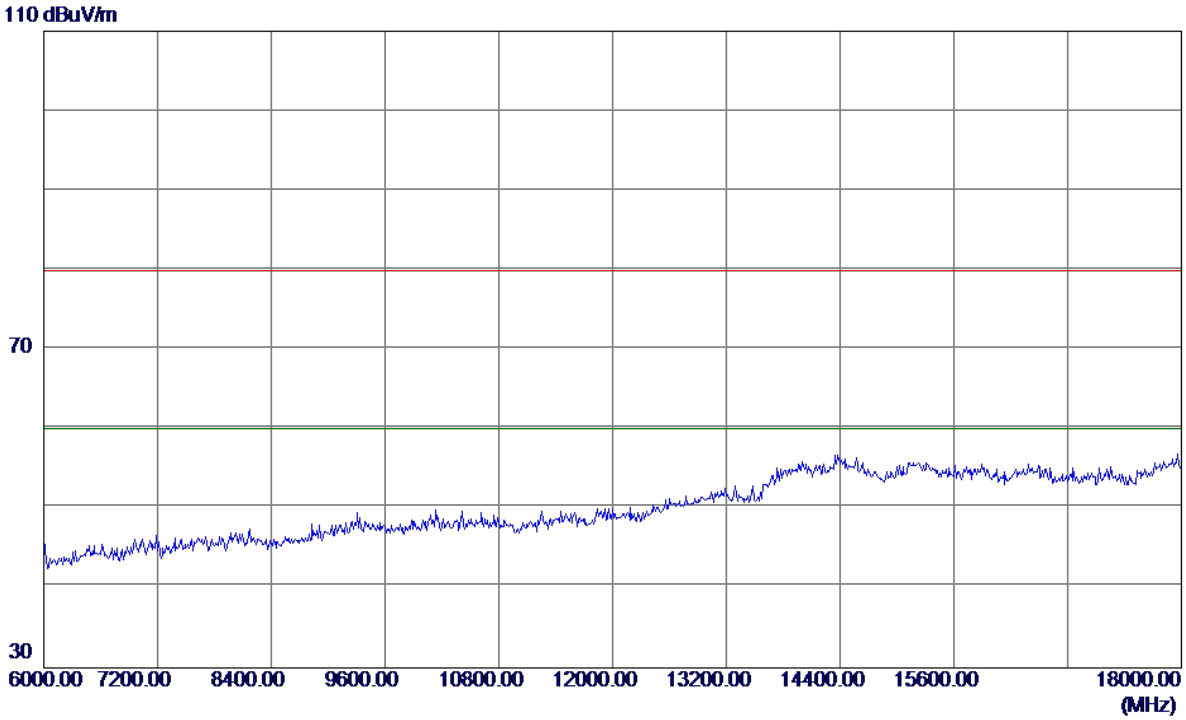


| No. | Freq. | Reading Level | Correct Factor | Measure ment | Limit | Margin | | |
|---|---|---|---|---|---|---|---|---|
| | MHz | dBuV/m | dB | dBuV/m | dBuV/m | dB | Detector | Comment |

| | |
|---|---|
| Orthogonal Axis: | X |
| Test Mode: | UNII-3/TX AC80 Mode 5775MHz |


**Horizontal**

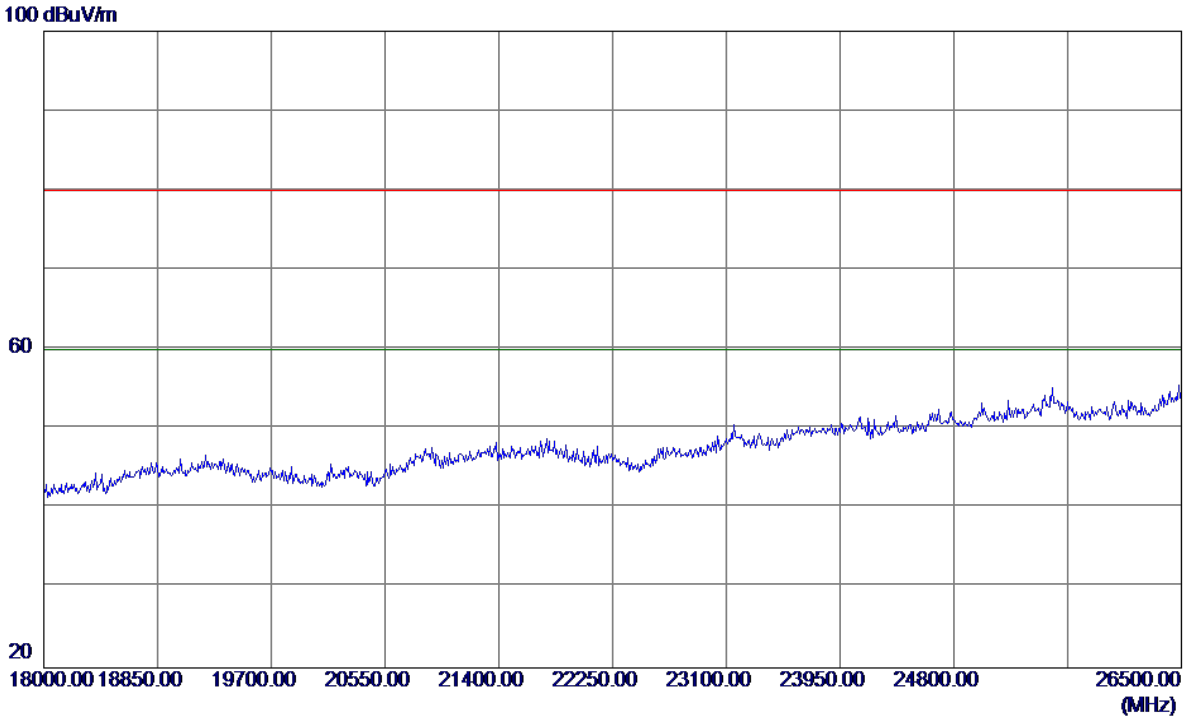


| No. | Freq. | Reading Level | Correct Factor | Measure ment | Limit | Margin | | |
|---|---|---|---|---|---|---|---|---|
| | MHz | dBuV/m | dB | dBuV/m | dBuV/m | dB | Detector | Comment |

| | |
|---|---|
| Orthogonal Axis: | X |
| Test Mode: | UNII-3/TX AC80 Mode 5775MHz |

**Horizontal**

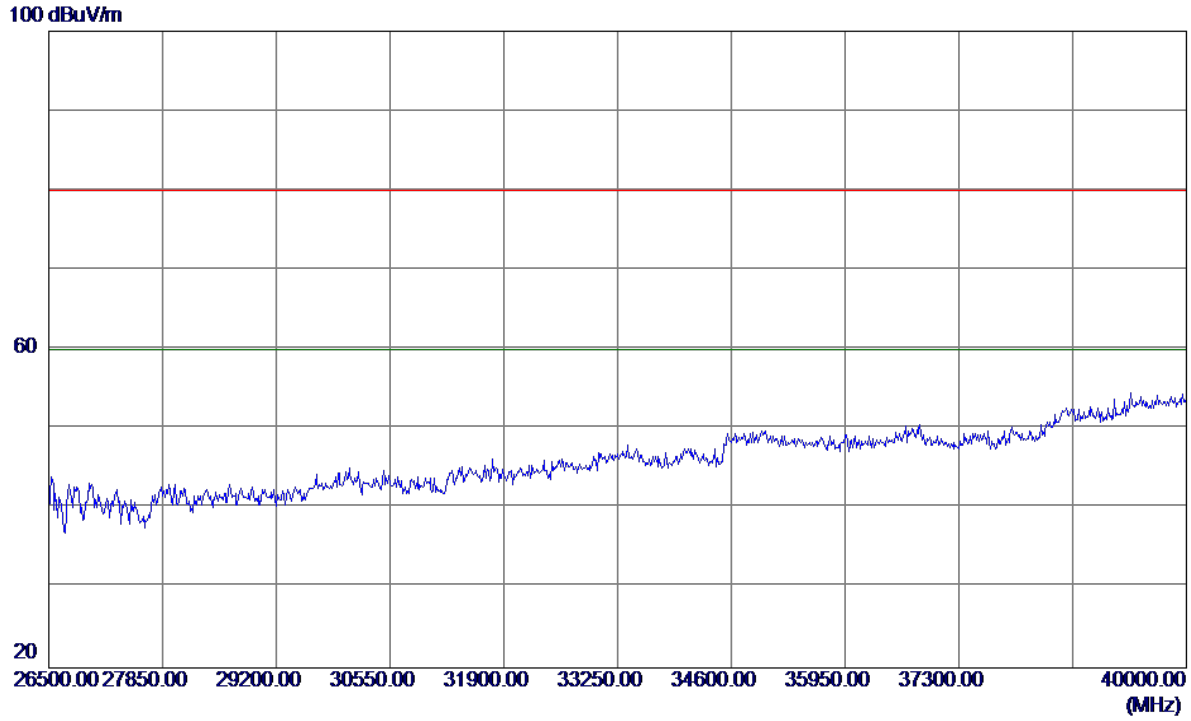



| No. | Freq. | Reading Level | Correct Factor | Measure ment | Limit | Margin | | |
|---|---|---|---|---|---|---|---|---|
| | MHz | dBuV/m | dB | dBuV/m | dBuV/m | dB | Detector | Comment |

## ANT 2

| | |
|---|---|
| Orthogonal Axis: | X |
| Test Mode: | UNII-1/ TX A Mode 5180MHz |


### Vertical

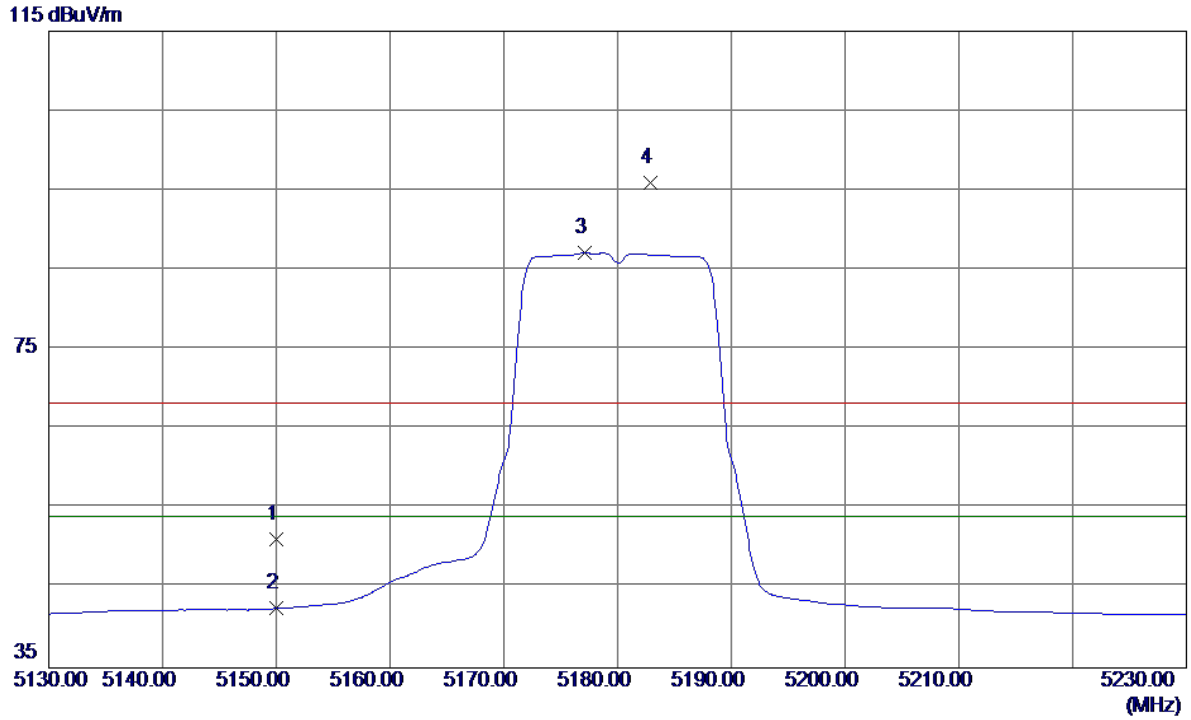


| No. | Freq. | Reading Level | Correct Factor | Measure ment | Limit | Margin | | |
|---|---|---|---|---|---|---|---|---|
| | MHz | dBuV/m | dB | dBuV/m | dBuV/m | dB | Detector | Comment |
| 1 | 5150.0000 | 10.06 | 41.10 | 51.16 | 68.30 | -17.14 | Peak | |
| 2 | 5150.0000 | 1.36 | 41.10 | 42.46 | 54.00 | -11.54 | AVG | |
| 3 * | 5177.1000 | 45.86 | 41.24 | 87.10 | 54.00 | 33.10 | AVG | No Limit |
| 4 | 5182.9000 | 54.70 | 41.27 | 95.97 | 68.30 | 27.67 | Peak | No Limit |

| | |
|---|---|
| Orthogonal Axis: | X |
| Test Mode: | UNII-1/ TX A Mode 5180MHz |


**Vertical**

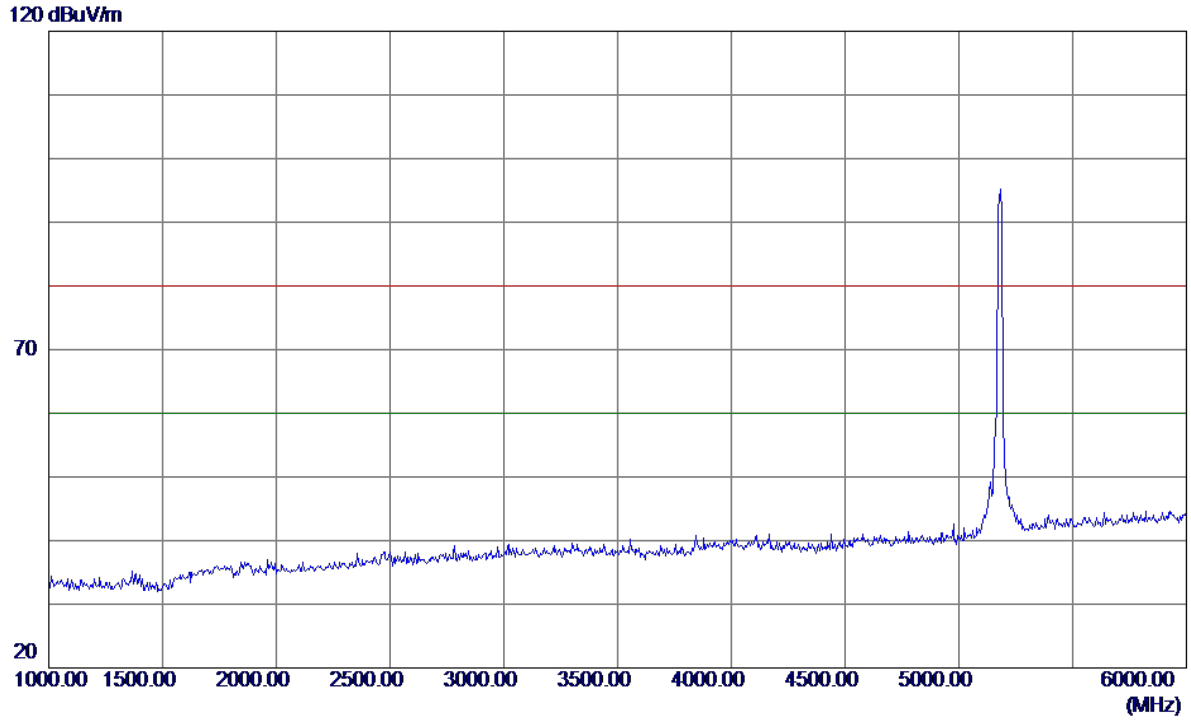


| No. | Freq. | Reading Level | Correct Factor | Measure ment | Limit | Margin | | |
|---|---|---|---|---|---|---|---|---|
| | MHz | dBuV/m | dB | dBuV/m | dBuV/m | dB | Detector | Comment |

| | |
|---|---|
| Orthogonal Axis: | X |
| Test Mode: | UNII-1/ TX A Mode 5180MHz |


**Vertical**

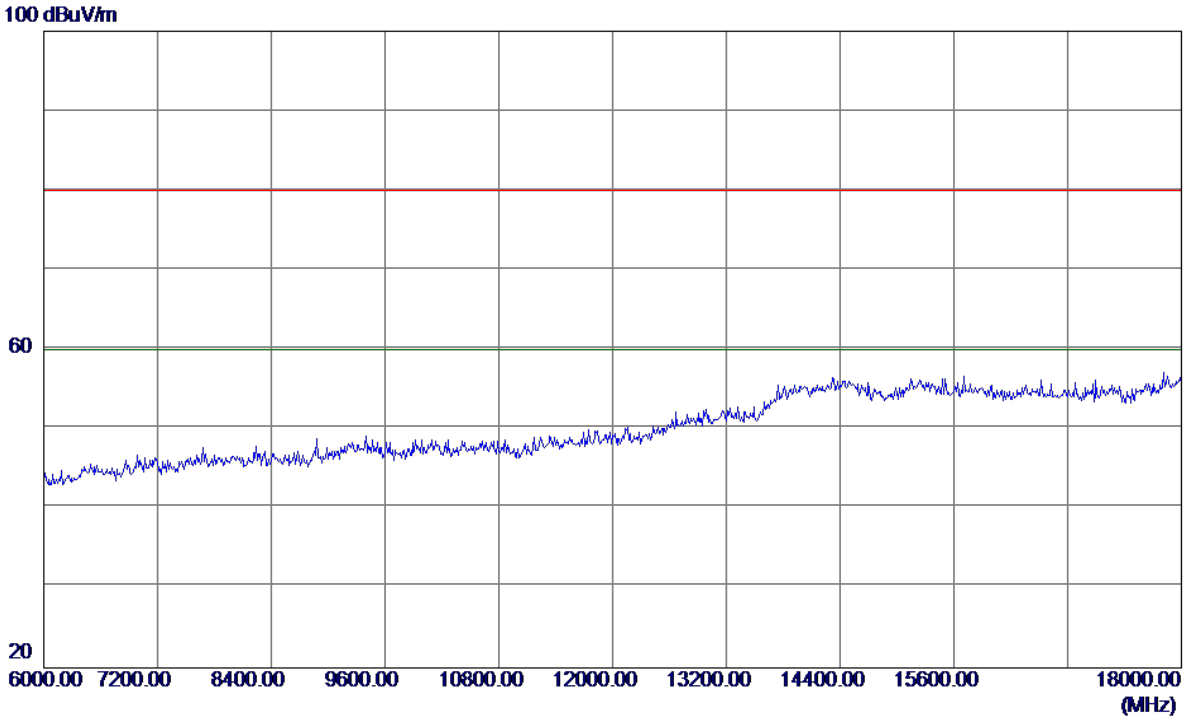


| No. | Freq. | Reading Level | Correct Factor | Measure ment | Limit | Margin | | |
|---|---|---|---|---|---|---|---|---|
| | MHz | dBuV/m | dB | dBuV/m | dBuV/m | dB | Detector | Comment |

| | |
|---|---|
| Orthogonal Axis: | X |
| Test Mode: | UNII-1/ TX A Mode 5180MHz |


**Vertical**

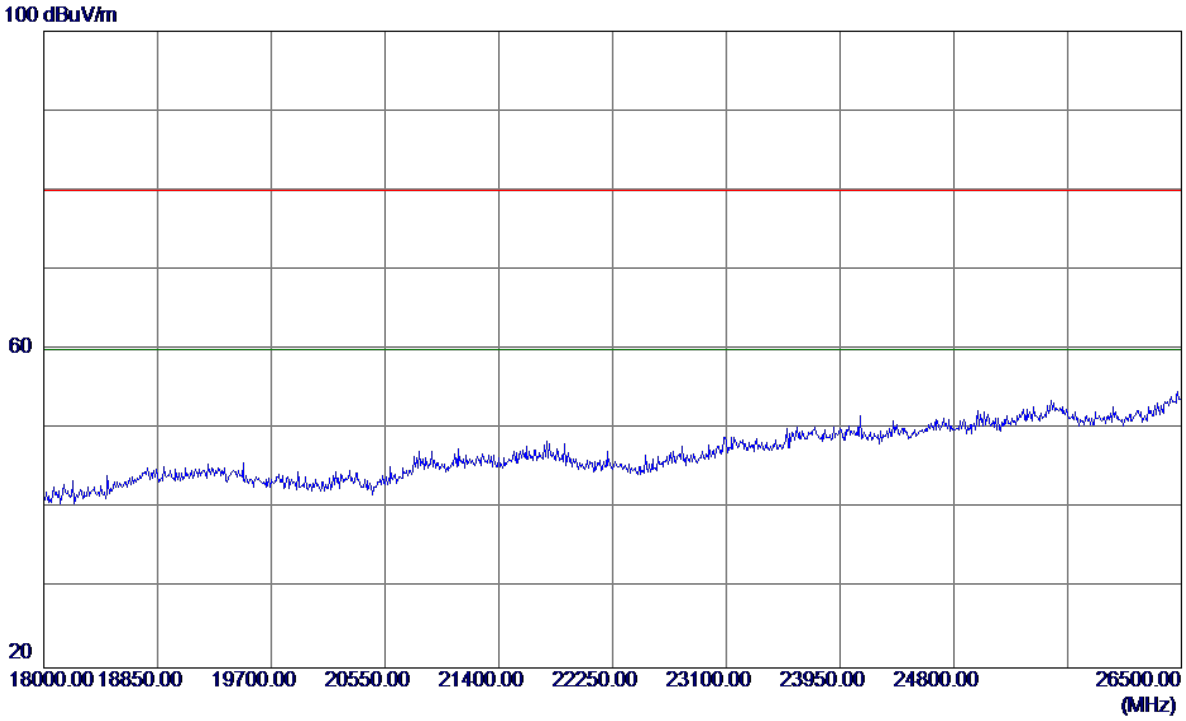


| No. | Freq. | Reading Level | Correct Factor | Measure ment | Limit | Margin | | |
|---|---|---|---|---|---|---|---|---|
| | MHz | dBuV/m | dB | dBuV/m | dBuV/m | dB | Detector | Comment |

| | |
|---|---|
| Orthogonal Axis: | X |
| Test Mode: | UNII-1/ TX A Mode 5180MHz |


**Vertical**

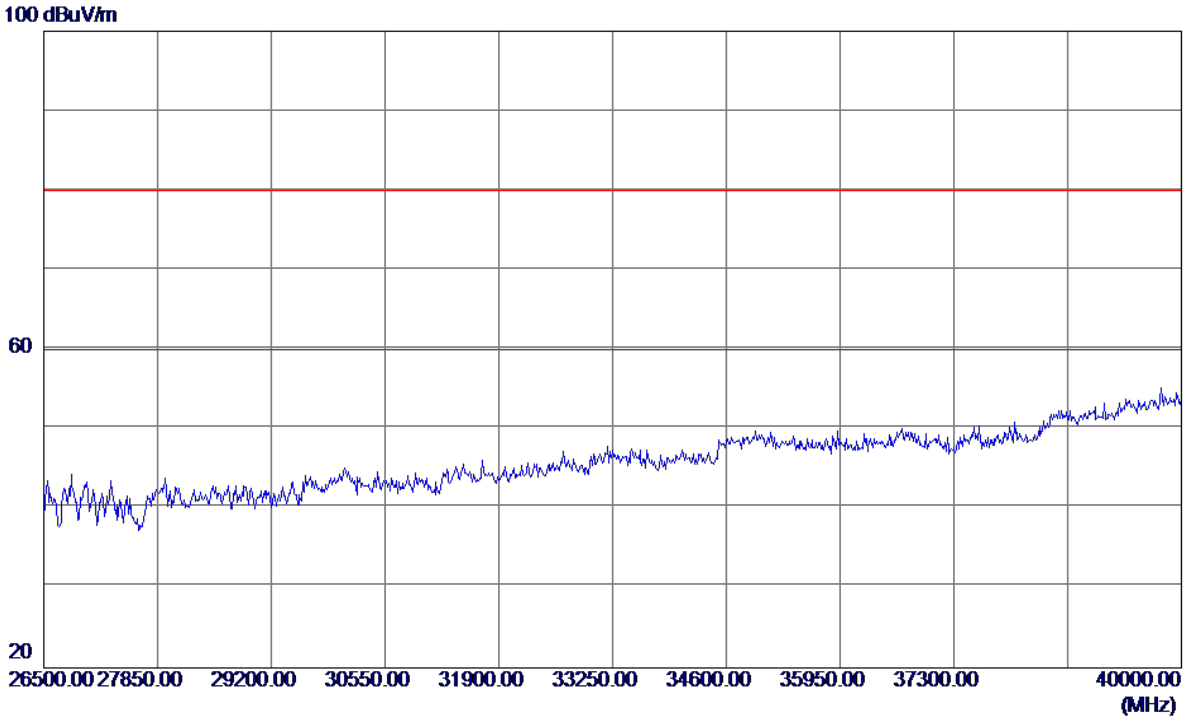


| No. | Freq. | Reading Level | Correct Factor | Measure ment | Limit | Margin | | |
|---|---|---|---|---|---|---|---|---|
| | MHz | dBuV/m | dB | dBuV/m | dBuV/m | dB | Detector | Comment |

| | |
|---|---|
| Orthogonal Axis: | X |
| Test Mode: | UNII-1/ TX A Mode 5180MHz |


**Horizontal**

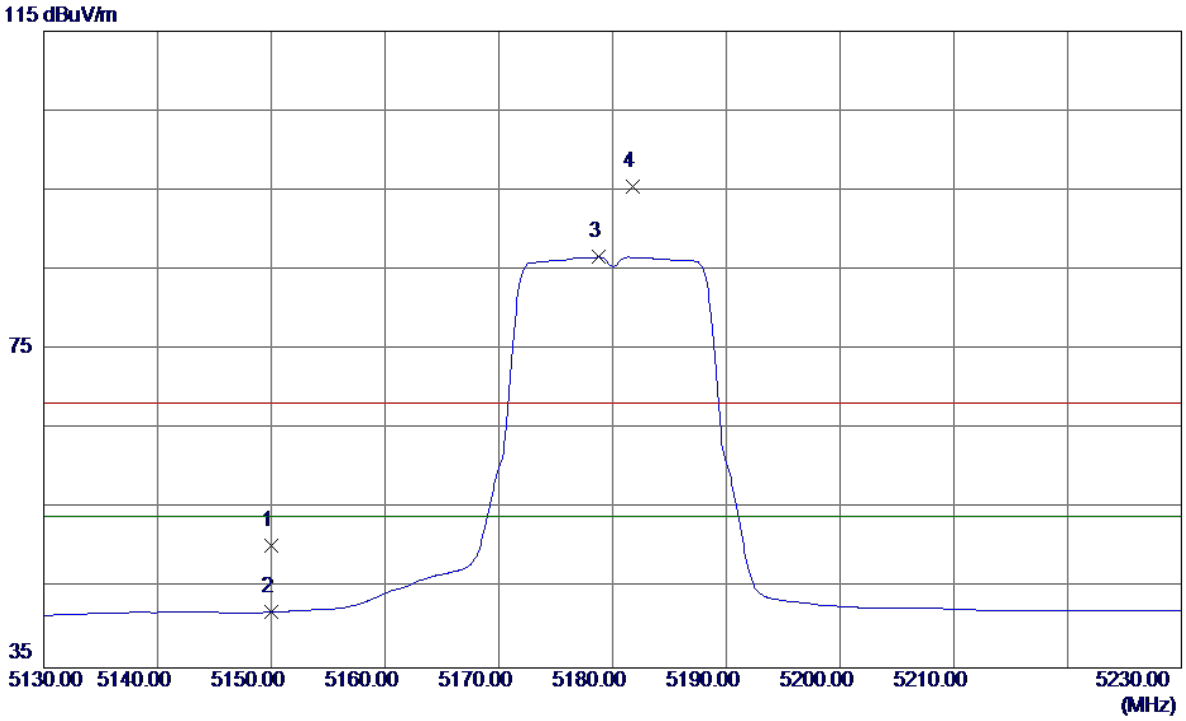


| No. | Freq. | Reading Level | Correct Factor | Measure ment | Limit | Margin | | |
|---|---|---|---|---|---|---|---|---|
| | MHz | dBuV/m | dB | dBuV/m | dBuV/m | dB | Detector | Comment |
| 1 | 5150.0000 | 9.33 | 41.10 | 50.43 | 68.30 | -17.87 | Peak | |
| 2 | 5150.0000 | 0.90 | 41.10 | 42.00 | 54.00 | -12.00 | AVG | |
| 3 * | 5178.8000 | 45.36 | 41.25 | 86.61 | 54.00 | 32.61 | AVG | No Limit |
| 4 | 5181.8000 | 54.15 | 41.26 | 95.41 | 68.30 | 27.11 | Peak | No Limit |

| | |
|---|---|
| Orthogonal Axis: | X |
| Test Mode: | UNII-1/ TX A Mode 5180MHz |


**Horizontal**

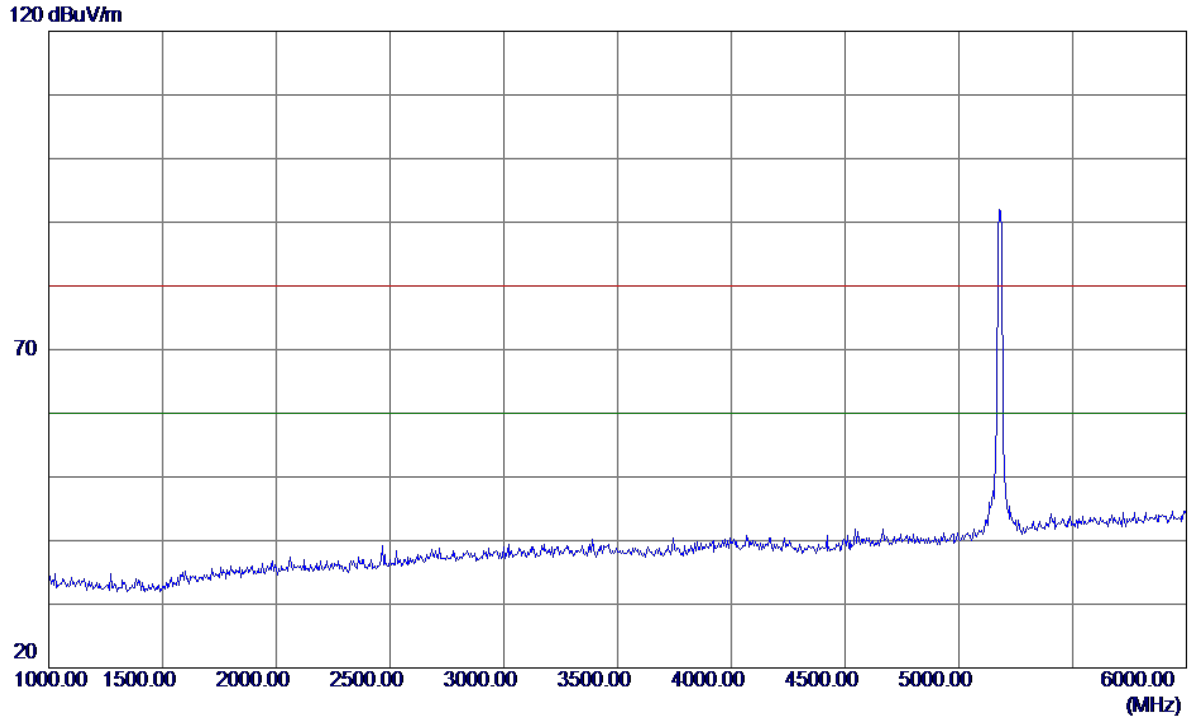


| No. | Freq. | Reading Level | Correct Factor | Measure ment | Limit | Margin | | |
|---|---|---|---|---|---|---|---|---|
| | MHz | dBuV/m | dB | dBuV/m | dBuV/m | dB | Detector | Comment |

| | |
|---|---|
| Orthogonal Axis: | X |
| Test Mode: | UNII-1/ TX A Mode 5180MHz |


**Horizontal**

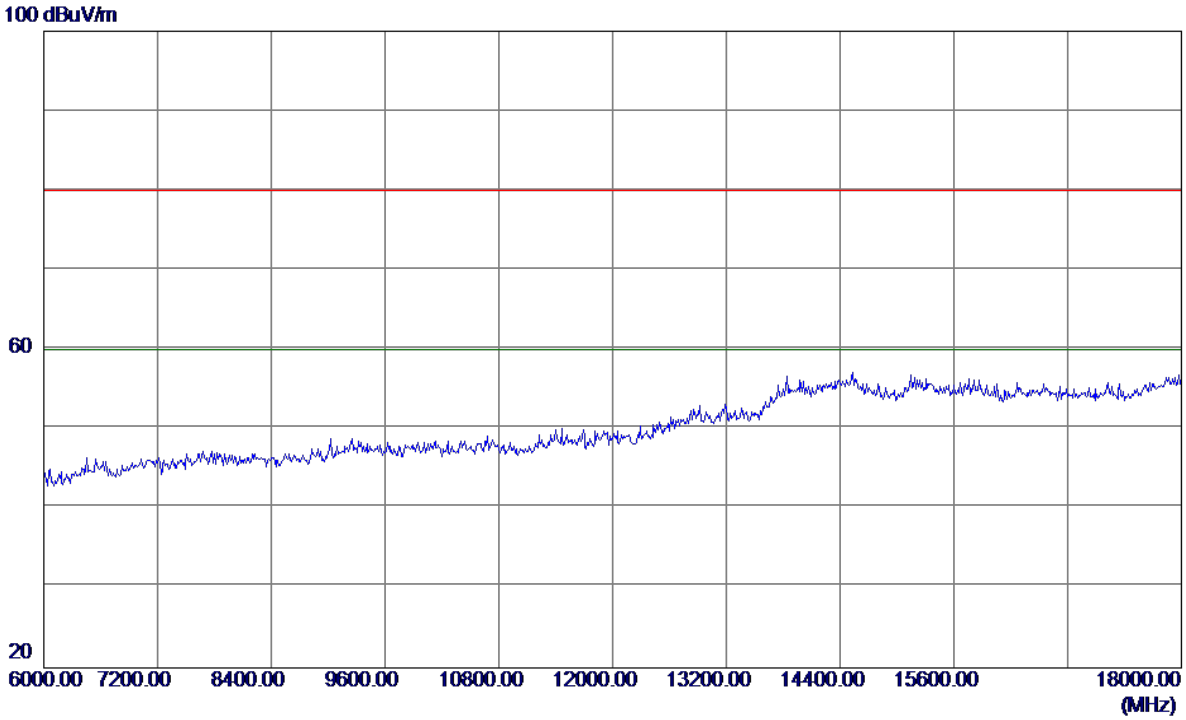


| No. | Freq. | Reading Level | Correct Factor | Measure ment | Limit | Margin | | |
|---|---|---|---|---|---|---|---|---|
| | MHz | dBuV/m | dB | dBuV/m | dBuV/m | dB | Detector | Comment |

| | |
|---|---|
| Orthogonal Axis: | X |
| Test Mode: | UNII-1/ TX A Mode 5180MHz |


**Horizontal**

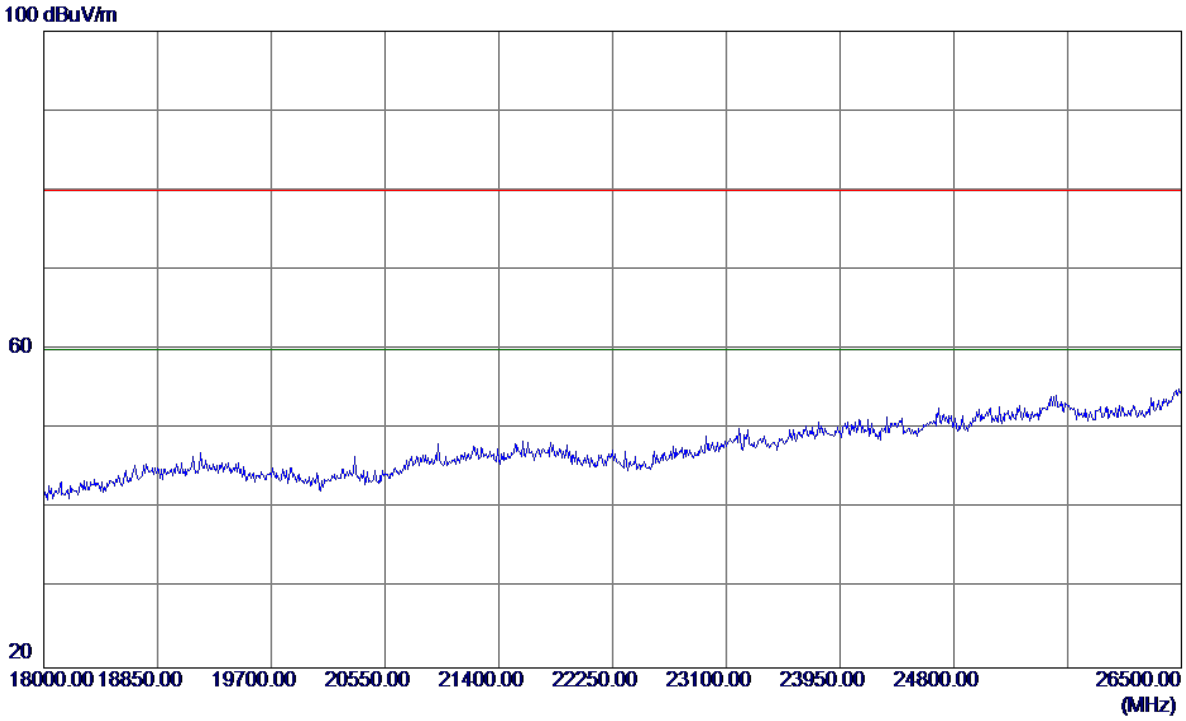


| No. | Freq. | Reading Level | Correct Factor | Measure ment | Limit | Margin | | |
|---|---|---|---|---|---|---|---|---|
| | MHz | dBuV/m | dB | dBuV/m | dBuV/m | dB | Detector | Comment |

| | |
|---|---|
| Orthogonal Axis: | X |
| Test Mode: | UNII-1/ TX A Mode 5180MHz |


**Horizontal**

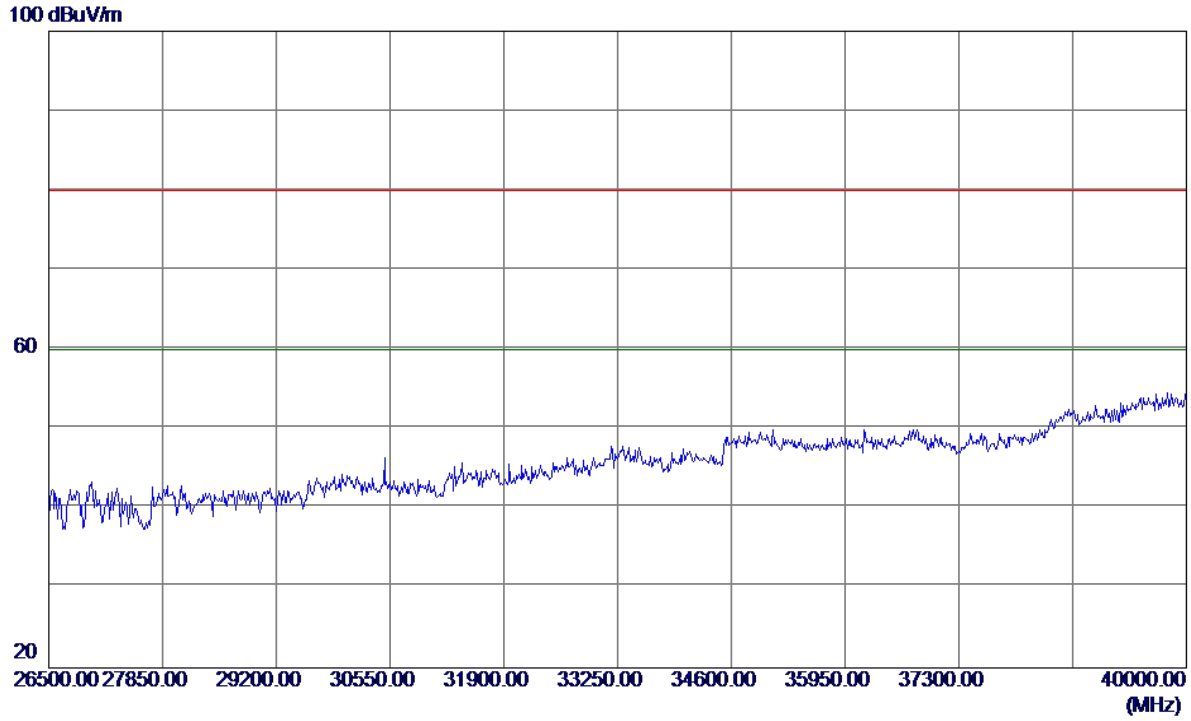


| No. | Freq. | Reading Level | Correct Factor | Measure ment | Limit | Margin | | |
|---|---|---|---|---|---|---|---|---|
| | MHz | dBuV/m | dB | dBuV/m | dBuV/m | dB | Detector | Comment |

| | |
|---|---|
| Orthogonal Axis: | X |
| Test Mode: | UNII-1/ TX A Mode 5240MHz |


**Vertical**

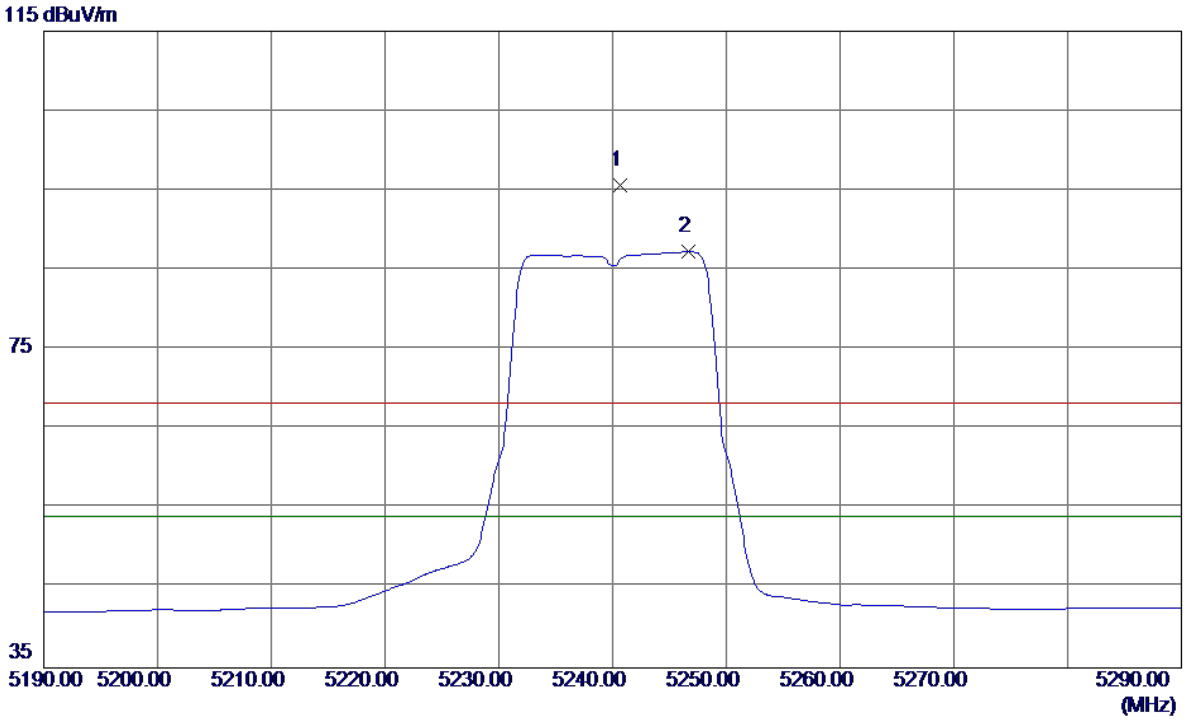


| No. | Freq. | Reading Level | Correct Factor | Measure ment | Limit | Margin | | |
|---|---|---|---|---|---|---|---|---|
| | MHz | dBuV/m | dB | dBuV/m | dBuV/m | dB | Detector | Comment |
| 1 | 5240.7000 | 54.14 | 41.56 | 95.70 | 68.30 | 27.40 | Peak | No Limit |
| 2 * | 5246.7000 | 45.72 | 41.59 | 87.31 | 54.00 | 33.31 | AVG | No Limit |

| | |
|---|---|
| Orthogonal Axis: | X |
| Test Mode: | UNII-1/ TX A Mode 5240MHz |


**Vertical**

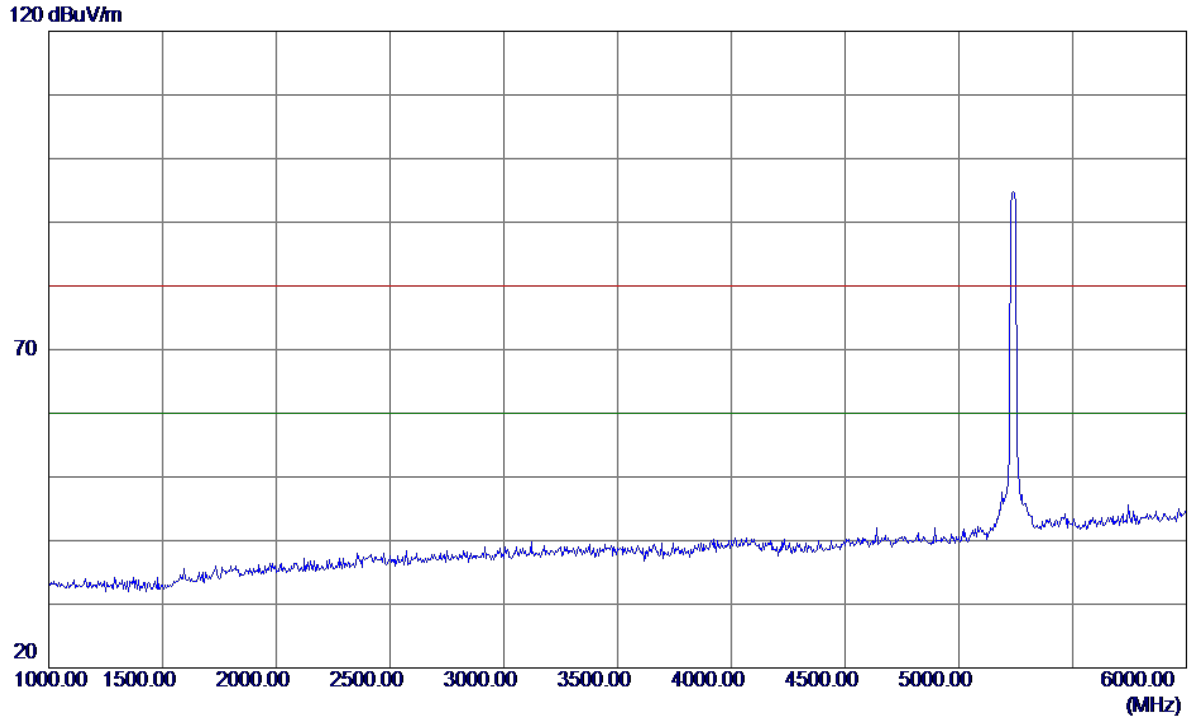


| No. | Freq. | Reading Level | Correct Factor | Measure ment | Limit | Margin | | |
|---|---|---|---|---|---|---|---|---|
| | MHz | dBuV/m | dB | dBuV/m | dBuV/m | dB | Detector | Comment |

| | |
|---|---|
| Orthogonal Axis: | X |
| Test Mode: | UNII-1/ TX A Mode 5240MHz |


**Vertical**

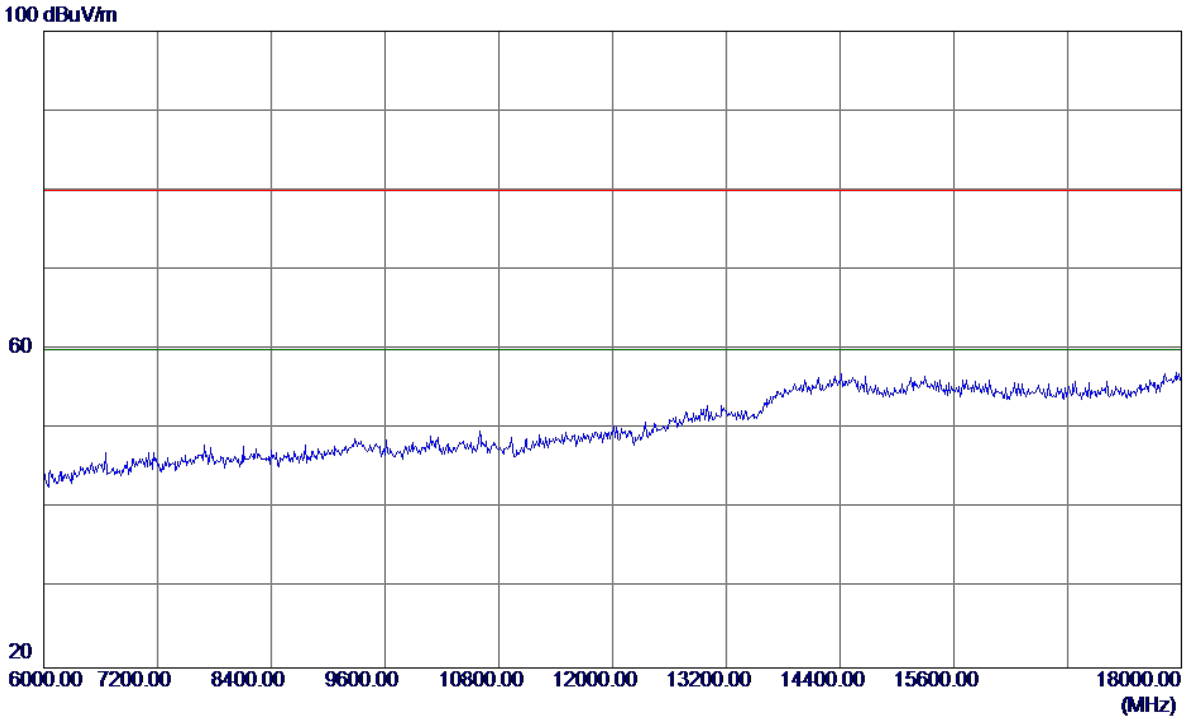


| No. | Freq. | Reading Level | Correct Factor | Measure ment | Limit | Margin | | |
|---|---|---|---|---|---|---|---|---|
| | MHz | dBuV/m | dB | dBuV/m | dBuV/m | dB | Detector | Comment |

| | |
|---|---|
| Orthogonal Axis: | X |
| Test Mode: | UNII-1/ TX A Mode 5240MHz |


**Vertical**

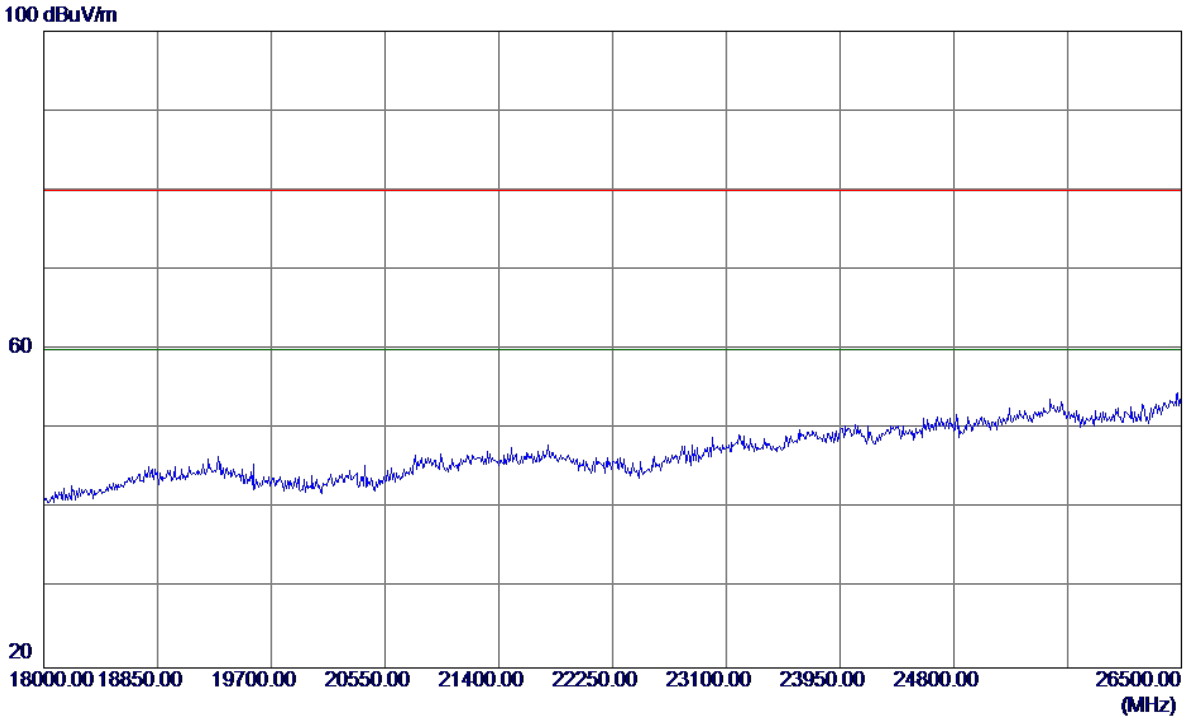


| No. | Freq. | Reading Level | Correct Factor | Measure ment | Limit | Margin | | |
|---|---|---|---|---|---|---|---|---|
| | MHz | dBuV/m | dB | dBuV/m | dBuV/m | dB | Detector | Comment |

| | |
|---|---|
| Orthogonal Axis: | X |
| Test Mode: | UNII-1/ TX A Mode 5240MHz |


**Vertical**

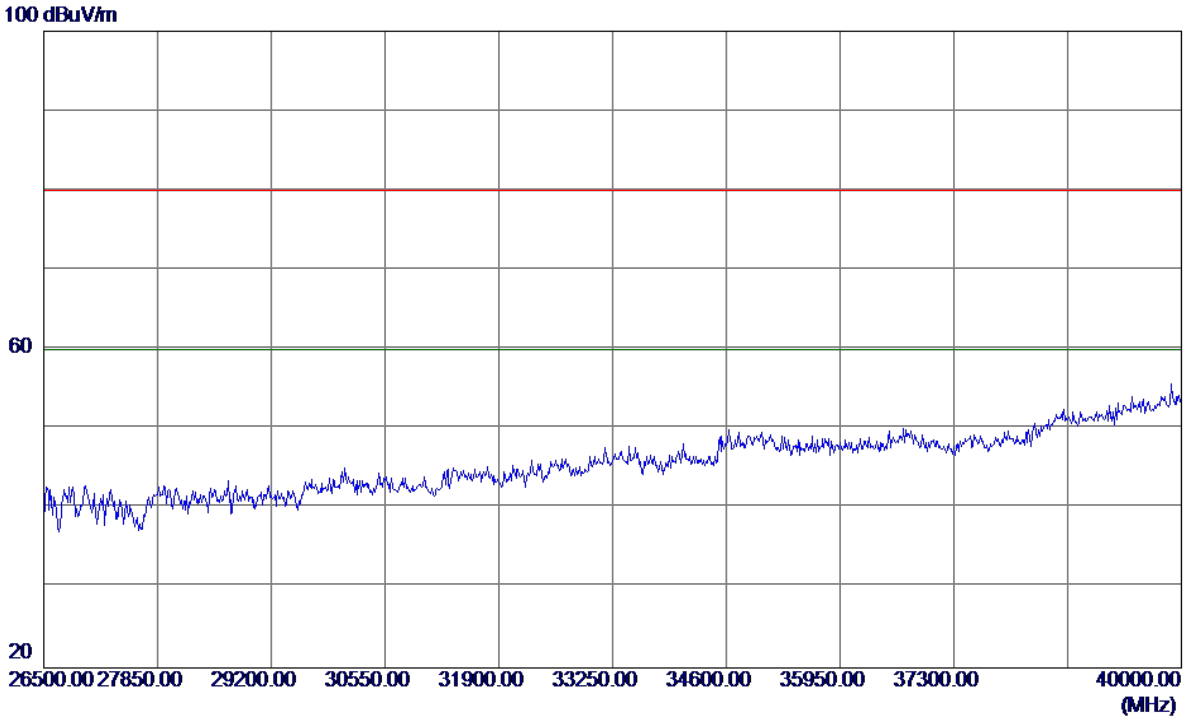


| No. | Freq. | Reading Level | Correct Factor | Measure ment | Limit | Margin | | |
|---|---|---|---|---|---|---|---|---|
| | MHz | dBuV/m | dB | dBuV/m | dBuV/m | dB | Detector | Comment |

| | |
|---|---|
| Orthogonal Axis: | X |
| Test Mode: | UNII-1/ TX A Mode 5240MHz |


**Horizontal**

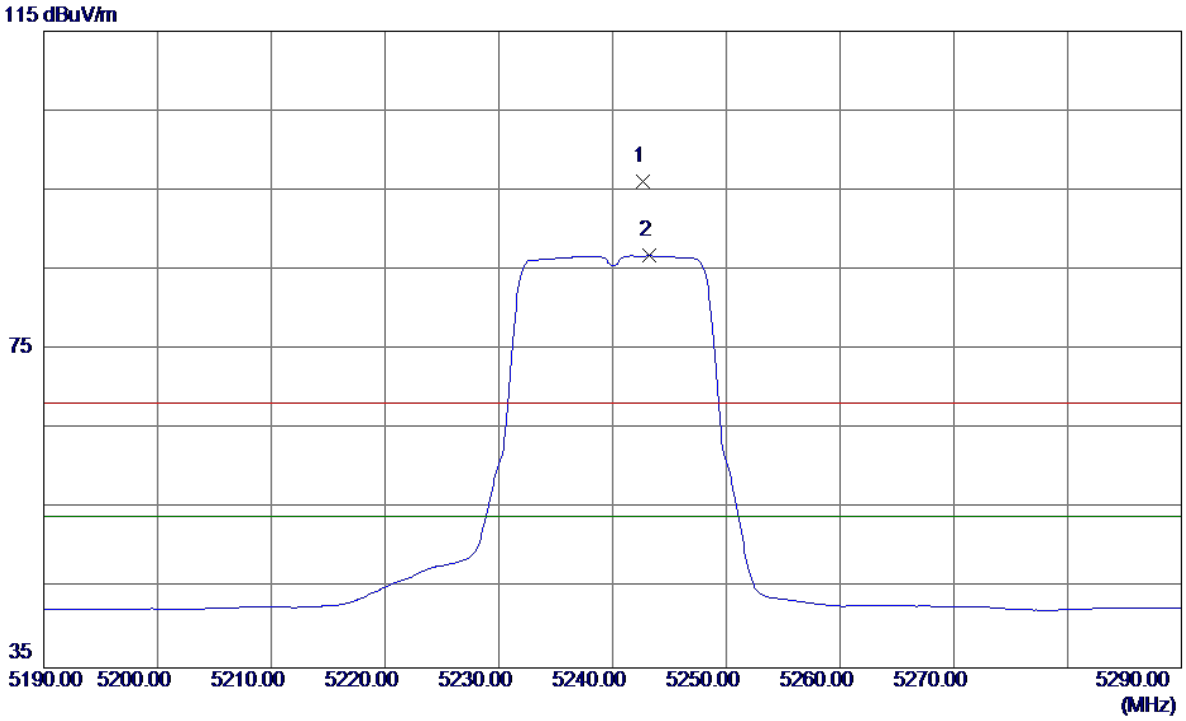


| No. | Freq. | Reading Level | Correct Factor | Measure ment | Limit | Margin | | |
|---|---|---|---|---|---|---|---|---|
| | MHz | dBuV/m | dB | dBuV/m | dBuV/m | dB | Detector | Comment |
| 1 | 5242.7000 | 54.53 | 41.57 | 96.10 | 68.30 | 27.80 | Peak | No Limit |
| 2 * | 5243.2000 | 45.19 | 41.58 | 86.77 | 54.00 | 32.77 | AVG | No Limit |

| | |
|---|---|
| Orthogonal Axis: | X |
| Test Mode: | UNII-1/ TX A Mode 5240MHz |


**Horizontal**

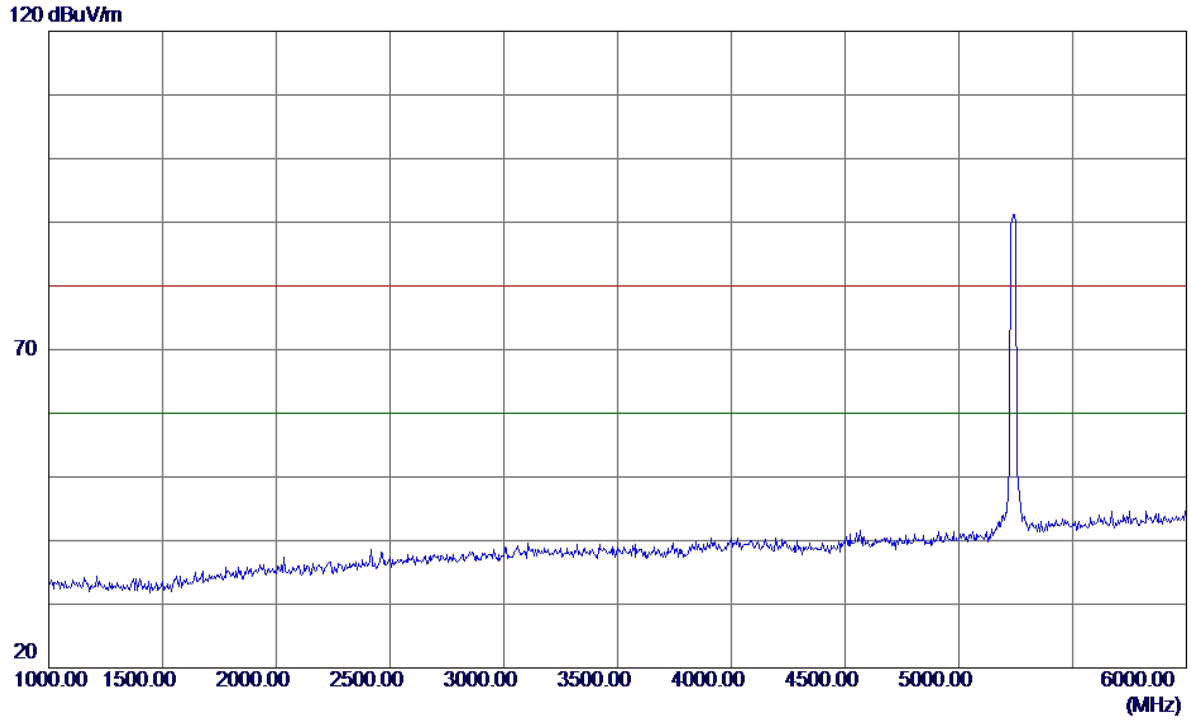


| No. | Freq. | Reading Level | Correct Factor | Measure ment | Limit | Margin | | |
|---|---|---|---|---|---|---|---|---|
| | MHz | dBuV/m | dB | dBuV/m | dBuV/m | dB | Detector | Comment |

| | |
|---|---|
| Orthogonal Axis: | X |
| Test Mode: | UNII-1/ TX A Mode 5240MHz |


**Horizontal**

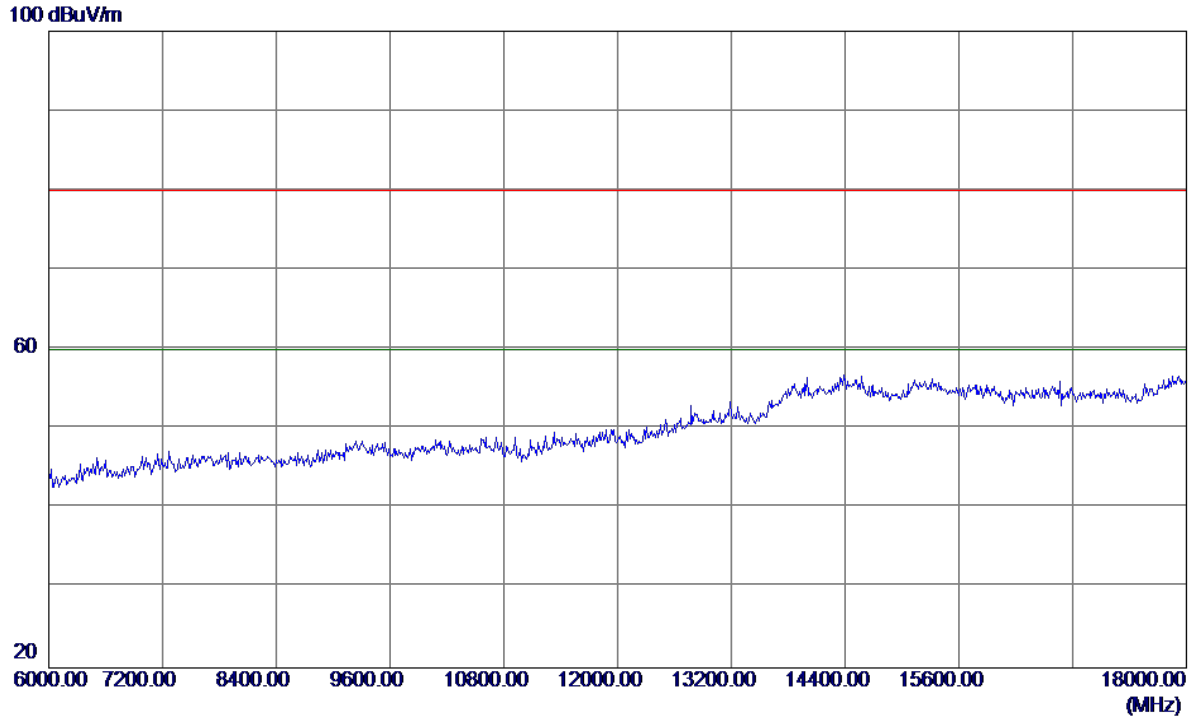


| No. | Freq. | Reading Level | Correct Factor | Measure ment | Limit | Margin | | |
|---|---|---|---|---|---|---|---|---|
| | MHz | dBuV/m | dB | dBuV/m | dBuV/m | dB | Detector | Comment |

| | |
|---|---|
| Orthogonal Axis: | X |
| Test Mode: | UNII-1/ TX A Mode 5240MHz |


**Horizontal**

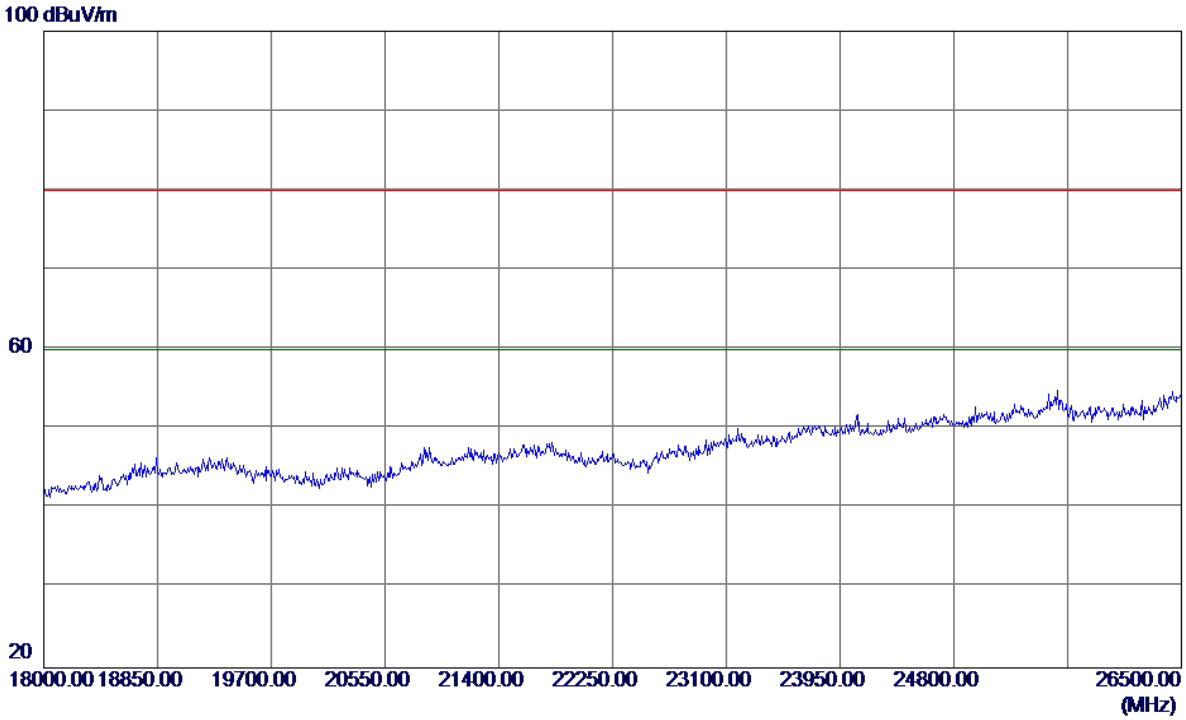


| No. | Freq. | Reading Level | Correct Factor | Measure ment | Limit | Margin | | |
|---|---|---|---|---|---|---|---|---|
| | MHz | dBuV/m | dB | dBuV/m | dBuV/m | dB | Detector | Comment |

| | |
|---|---|
| Orthogonal Axis: | X |
| Test Mode: | UNII-1/ TX A Mode 5240MHz |


**Horizontal**

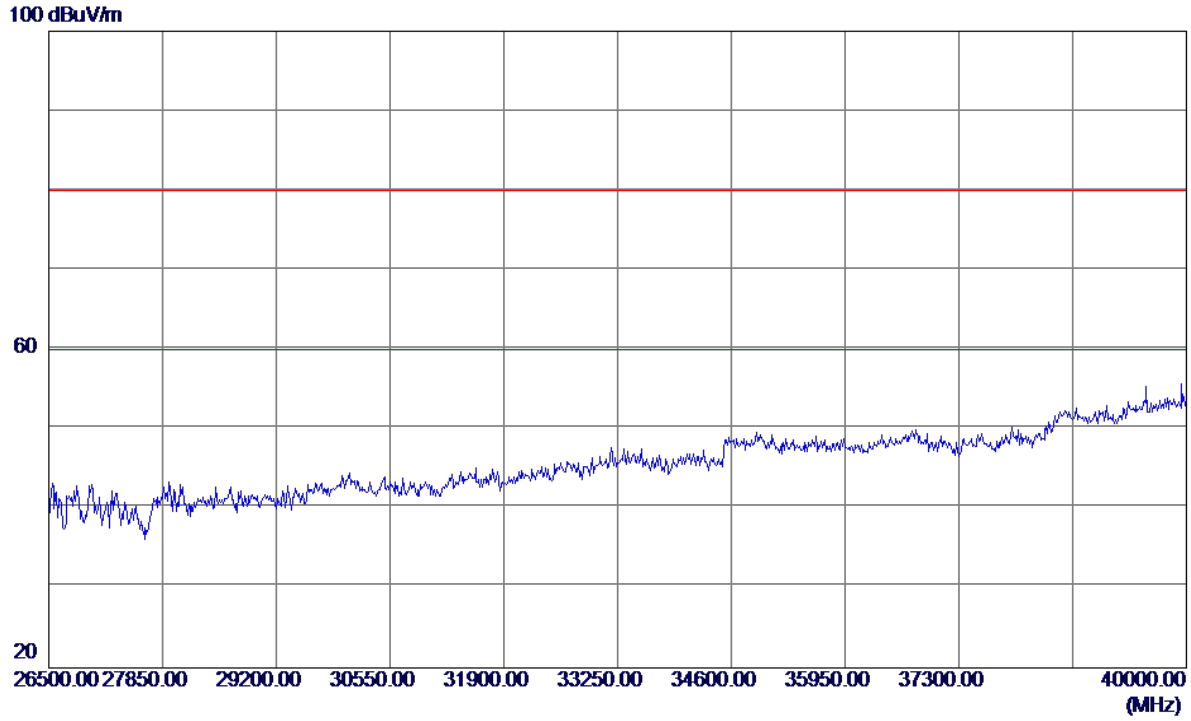


| No. | Freq. | Reading Level | Correct Factor | Measure ment | Limit | Margin | | |
|---|---|---|---|---|---|---|---|---|
| | MHz | dBuV/m | dB | dBuV/m | dBuV/m | dB | Detector | Comment |

| | |
|---|---|
| Orthogonal Axis: | X |
| Test Mode: | UNII-1/ TX N20 Mode 5180MHz |


**Vertical**

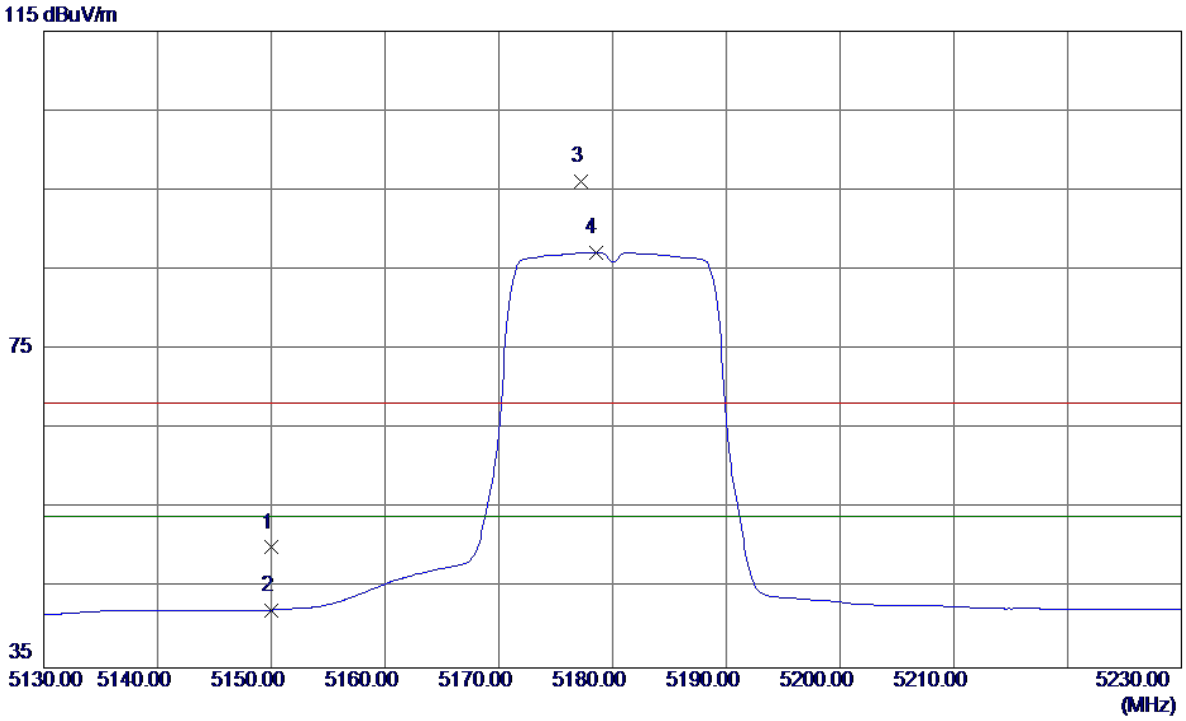


| No. | Freq. | Reading Level | Correct Factor | Measure ment | Limit | Margin | | |
|---|---|---|---|---|---|---|---|---|
| | MHz | dBuV/m | dB | dBuV/m | dBuV/m | dB | Detector | Comment |
| 1 | 5150.0000 | 9.02 | 41.10 | 50.12 | 68.30 | -18.18 | Peak | |
| 2 | 5150.0000 | 1.17 | 41.10 | 42.27 | 54.00 | -11.73 | AVG | |
| 3 | 5177.2000 | 54.81 | 41.24 | 96.05 | 68.30 | 27.75 | Peak | No Limit |
| 4 * | 5178.5000 | 45.97 | 41.25 | 87.22 | 54.00 | 33.22 | AVG | No Limit |

| | |
|---|---|
| Orthogonal Axis: | X |
| Test Mode: | UNII-1/ TX N20 Mode 5180MHz |


**Vertical**

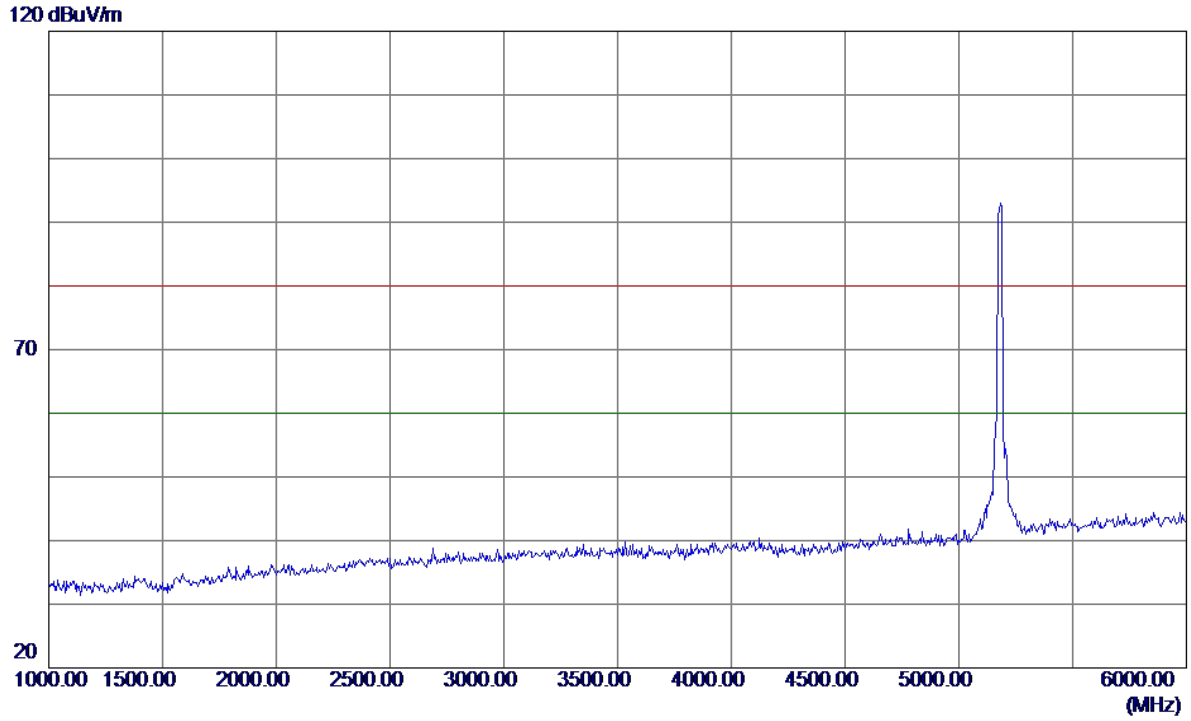


| No. | Freq. | Reading Level | Correct Factor | Measure ment | Limit | Margin | | |
|---|---|---|---|---|---|---|---|---|
| | MHz | dBuV/m | dB | dBuV/m | dBuV/m | dB | Detector | Comment |

| | |
|---|---|
| Orthogonal Axis: | X |
| Test Mode: | UNII-1/ TX N20 Mode 5180MHz |


**Vertical**

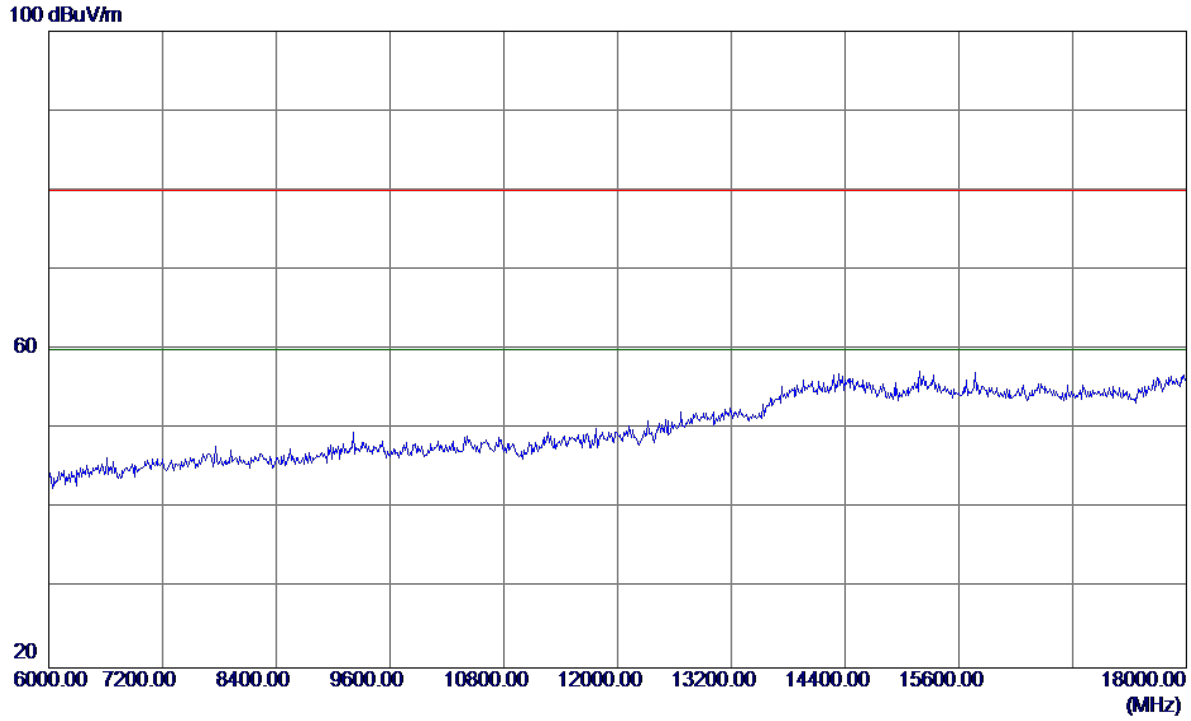


| No. | Freq. | Reading Level | Correct Factor | Measure ment | Limit | Margin | | |
|---|---|---|---|---|---|---|---|---|
| | MHz | dBuV/m | dB | dBuV/m | dBuV/m | dB | Detector | Comment |

| | |
|---|---|
| Orthogonal Axis: | X |
| Test Mode: | UNII-1/ TX N20 Mode 5180MHz |


**Vertical**

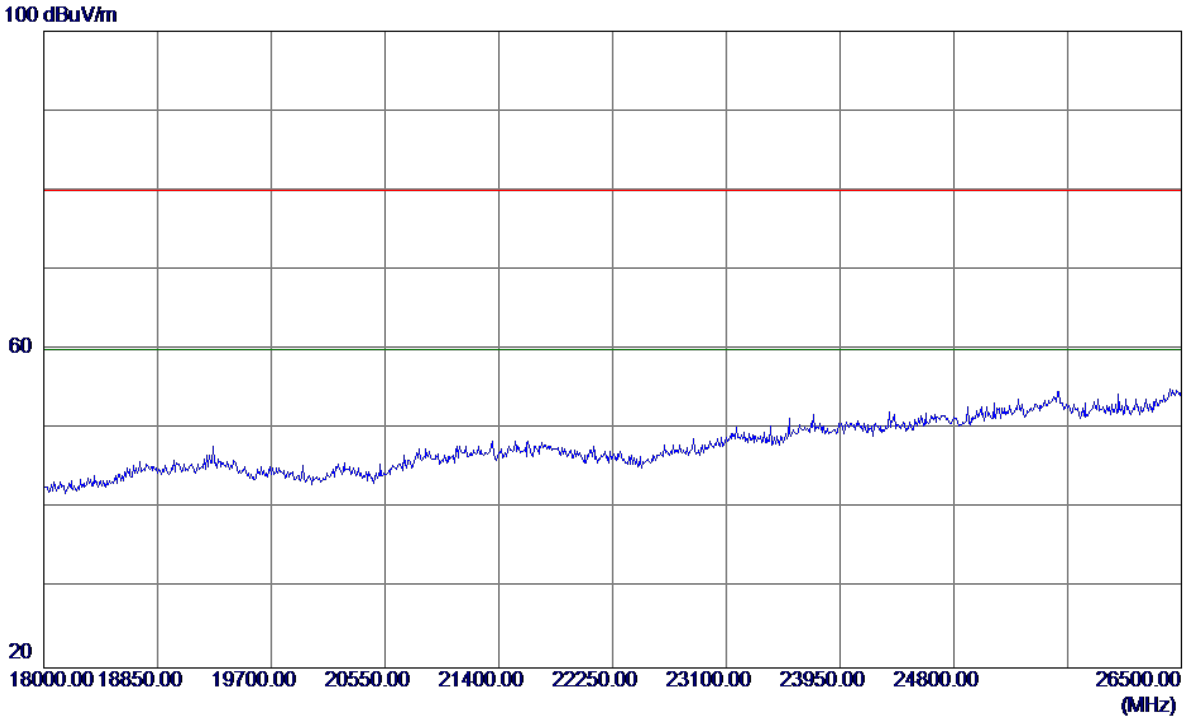


| No. | Freq. | Reading Level | Correct Factor | Measure ment | Limit | Margin | | |
|---|---|---|---|---|---|---|---|---|
| | MHz | dBuV/m | dB | dBuV/m | dBuV/m | dB | Detector | Comment |

| | |
|---|---|
| Orthogonal Axis: | X |
| Test Mode: | UNII-1/ TX N20 Mode 5180MHz |


**Vertical**

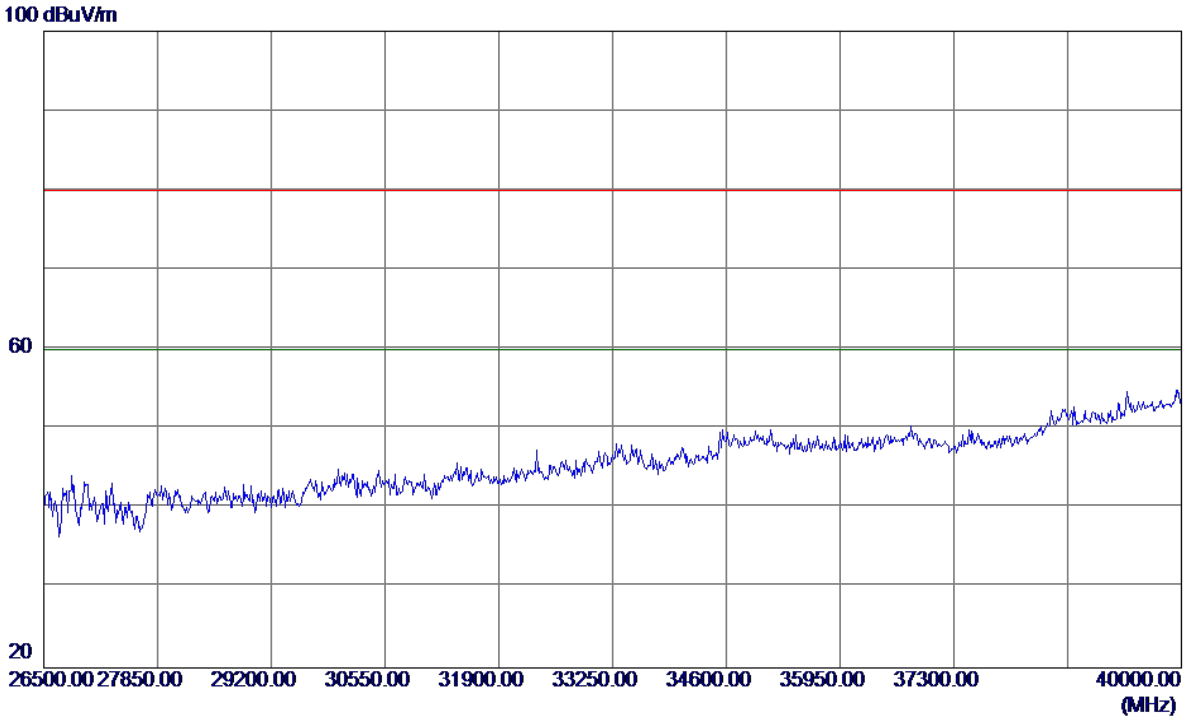


| No. | Freq. | Reading Level | Correct Factor | Measure ment | Limit | Margin | | |
|---|---|---|---|---|---|---|---|---|
| | MHz | dBuV/m | dB | dBuV/m | dBuV/m | dB | Detector | Comment |

| | |
|---|---|
| Orthogonal Axis: | X |
| Test Mode: | UNII-1/ TX N20 Mode 5180MHz |


**Horizontal**

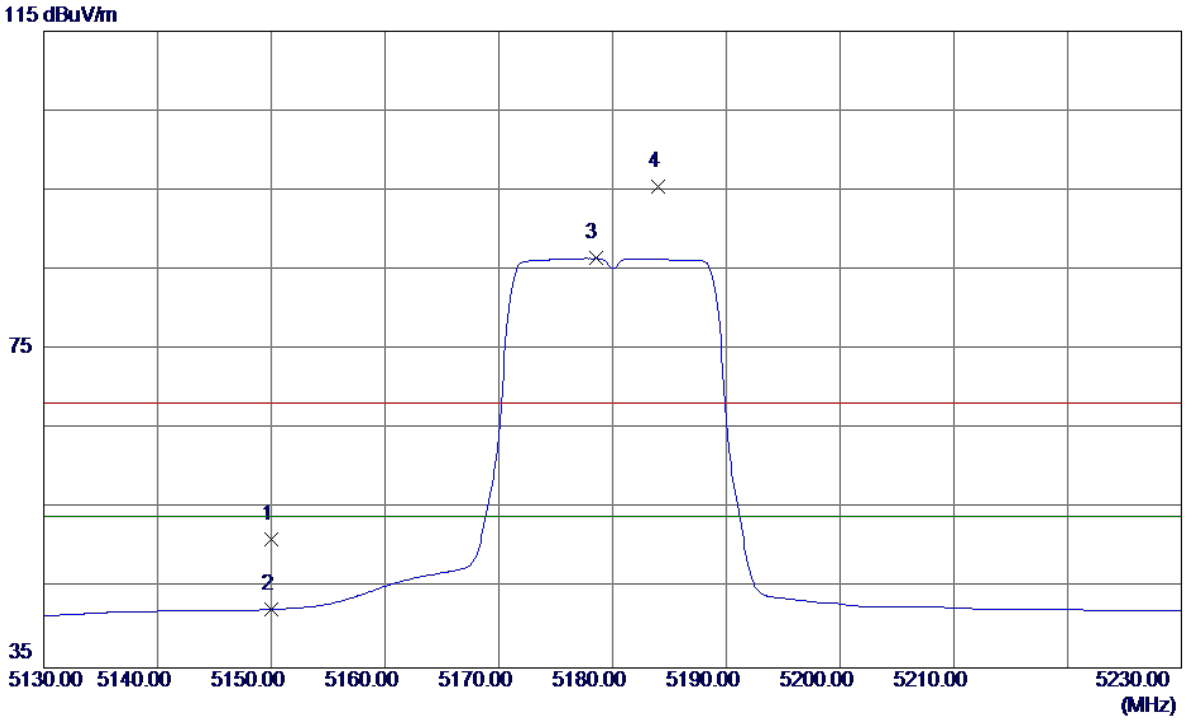


| No. | Freq. | Reading Level | Correct Factor | Measure ment | Limit | Margin | | |
|---|---|---|---|---|---|---|---|---|
| | MHz | dBuV/m | dB | dBuV/m | dBuV/m | dB | Detector | Comment |
| 1 | 5150.0000 | 10.03 | 41.10 | 51.13 | 68.30 | -17.17 | Peak | |
| 2 | 5150.0000 | 1.23 | 41.10 | 42.33 | 54.00 | -11.67 | AVG | |
| 3 * | 5178.5000 | 45.20 | 41.25 | 86.45 | 54.00 | 32.45 | AVG | No Limit |
| 4 | 5184.0000 | 54.26 | 41.27 | 95.53 | 68.30 | 27.23 | Peak | No Limit |

| | |
|---|---|
| Orthogonal Axis: | X |
| Test Mode: | UNII-1/ TX N20 Mode 5180MHz |


**Horizontal**

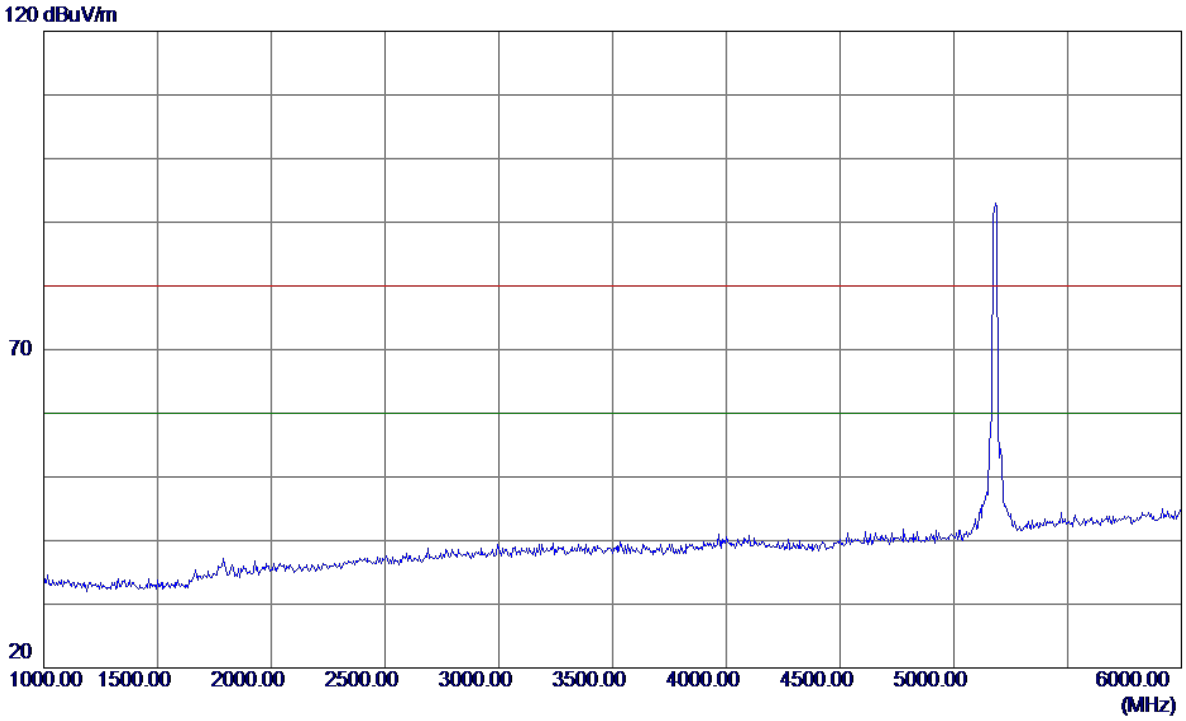


| No. | Freq. | Reading Level | Correct Factor | Measure ment | Limit | Margin | | |
|---|---|---|---|---|---|---|---|---|
| | MHz | dBuV/m | dB | dBuV/m | dBuV/m | dB | Detector | Comment |

| | |
|---|---|
| Orthogonal Axis: | X |
| Test Mode: | UNII-1/ TX N20 Mode 5180MHz |


**Horizontal**

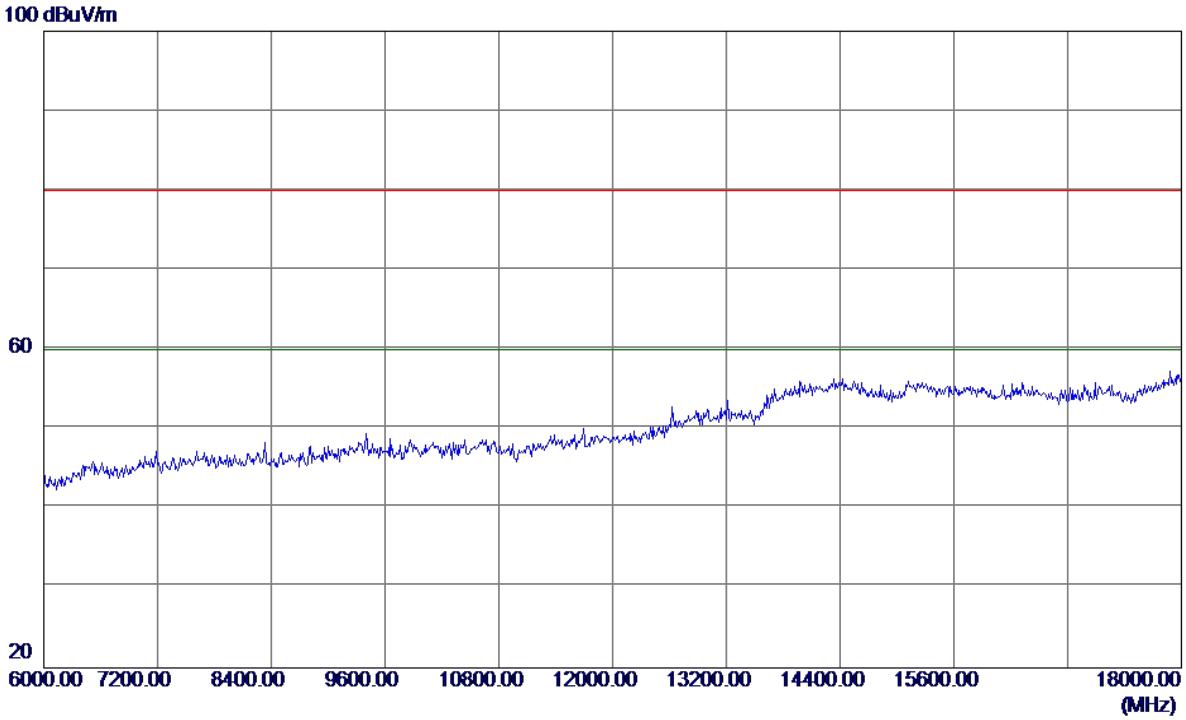


| No. | Freq. | Reading Level | Correct Factor | Measure ment | Limit | Margin | | |
|---|---|---|---|---|---|---|---|---|
| | MHz | dBuV/m | dB | dBuV/m | dBuV/m | dB | Detector | Comment |

| | |
|---|---|
| Orthogonal Axis: | X |
| Test Mode: | UNII-1/ TX N20 Mode 5180MHz |


**Horizontal**

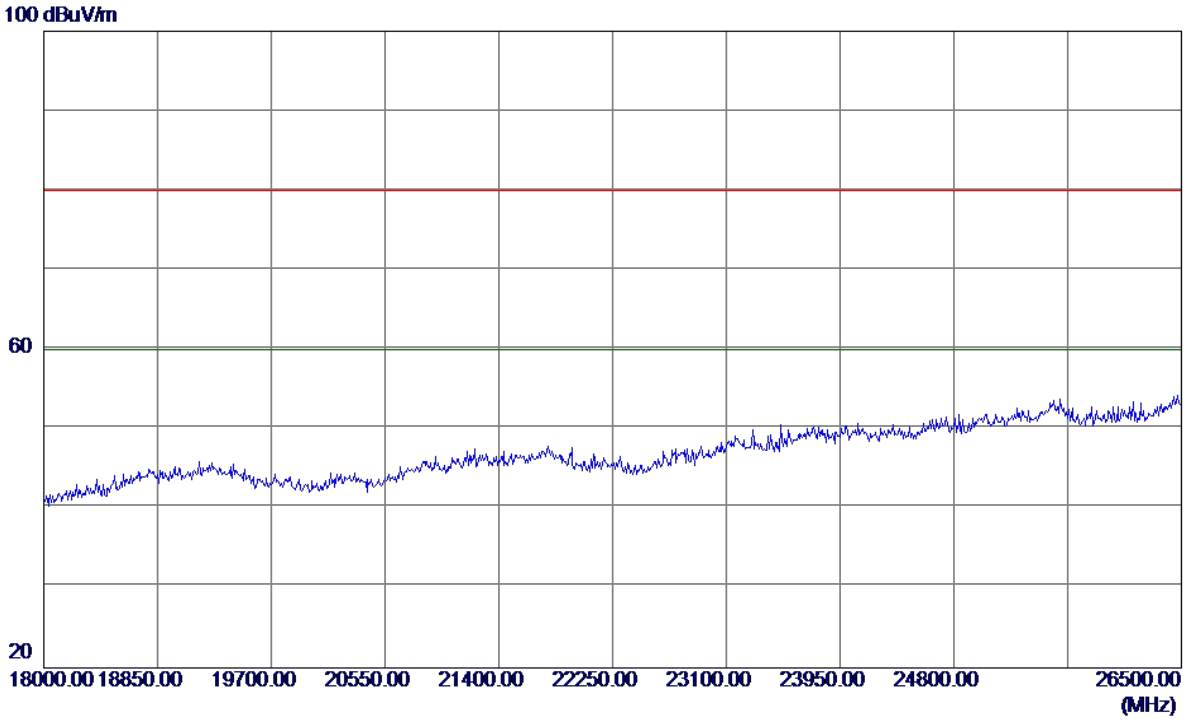


| No. | Freq. | Reading Level | Correct Factor | Measure ment | Limit | Margin | | |
|---|---|---|---|---|---|---|---|---|
| | MHz | dBuV/m | dB | dBuV/m | dBuV/m | dB | Detector | Comment |

| | |
|---|---|
| Orthogonal Axis: | X |
| Test Mode: | UNII-1/ TX N20 Mode 5180MHz |


**Horizontal**

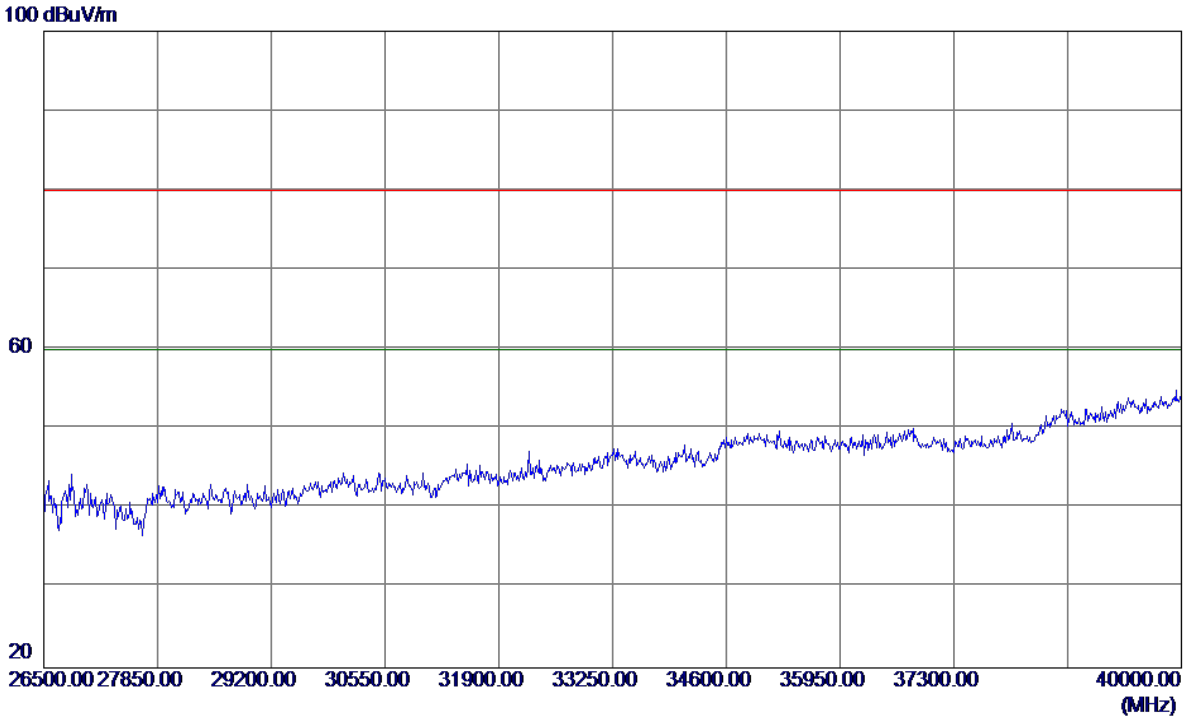


| No. | Freq. | Reading Level | Correct Factor | Measure ment | Limit | Margin | | |
|---|---|---|---|---|---|---|---|---|
| | MHz | dBuV/m | dB | dBuV/m | dBuV/m | dB | Detector | Comment |

| | |
|---|---|
| Orthogonal Axis: | X |
| Test Mode: | UNII-1/ TX N20 Mode 5240MHz |


**Vertical**

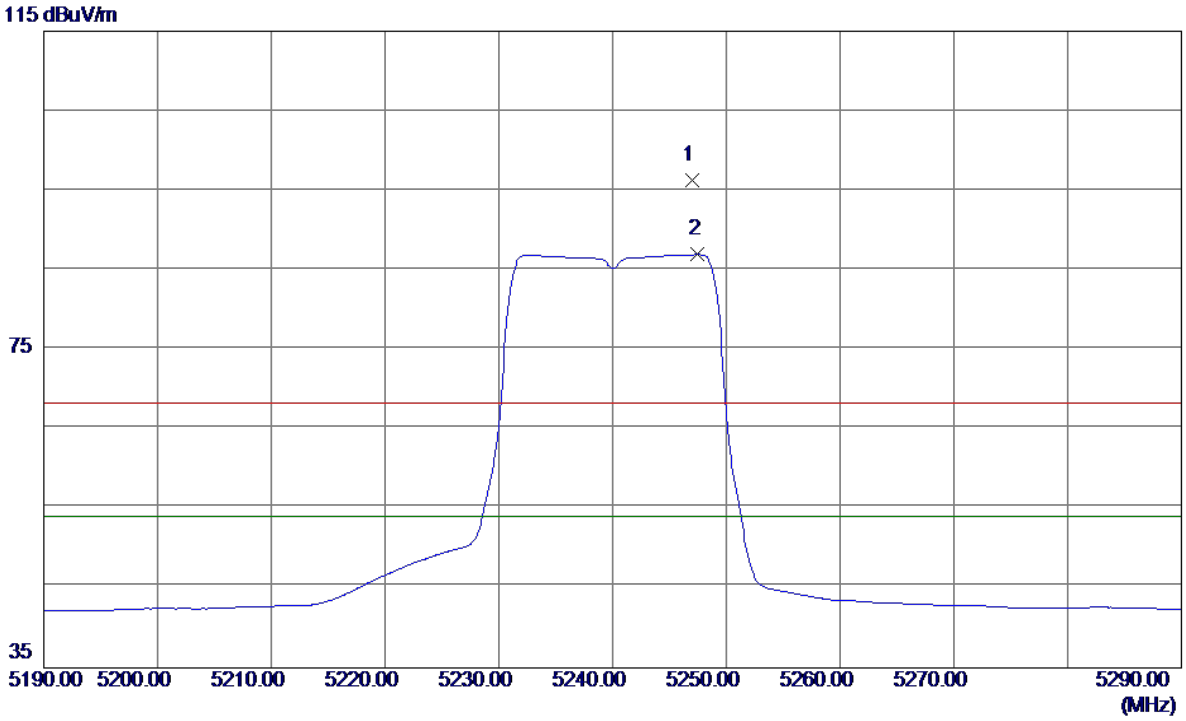


| No. | Freq. | Reading Level | Correct Factor | Measure ment | Limit | Margin | | |
|---|---|---|---|---|---|---|---|---|
| | MHz | dBuV/m | dB | dBuV/m | dBuV/m | dB | Detector | Comment |
| 1 | 5247.0000 | 54.67 | 41.59 | 96.26 | 68.30 | 27.96 | Peak | No Limit |
| 2 * | 5247.5000 | 45.33 | 41.60 | 86.93 | 54.00 | 32.93 | AVG | No Limit |

| | |
|---|---|
| Orthogonal Axis: | X |
| Test Mode: | UNII-1/ TX N20 Mode 5240MHz |


**Vertical**

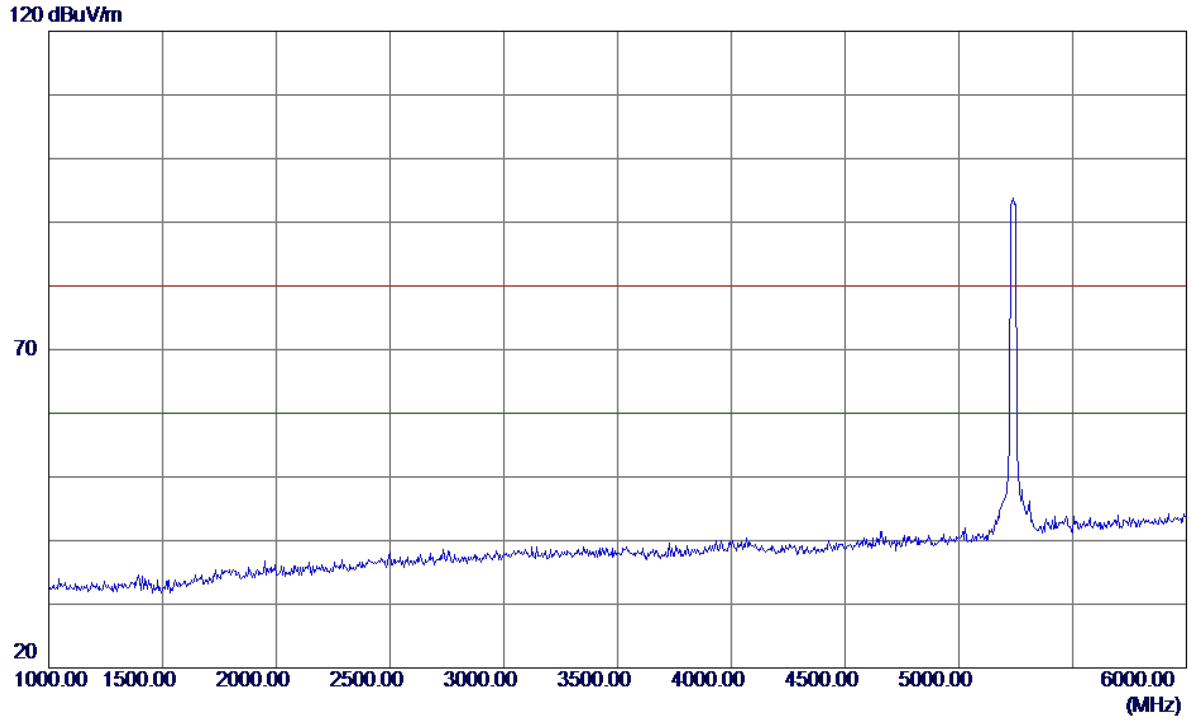


| No. | Freq. | Reading Level | Correct Factor | Measure ment | Limit | Margin | | |
|---|---|---|---|---|---|---|---|---|
| | MHz | dBuV/m | dB | dBuV/m | dBuV/m | dB | Detector | Comment |

| | |
|---|---|
| Orthogonal Axis: | X |
| Test Mode: | UNII-1/ TX N20 Mode 5240MHz |


**Vertical**

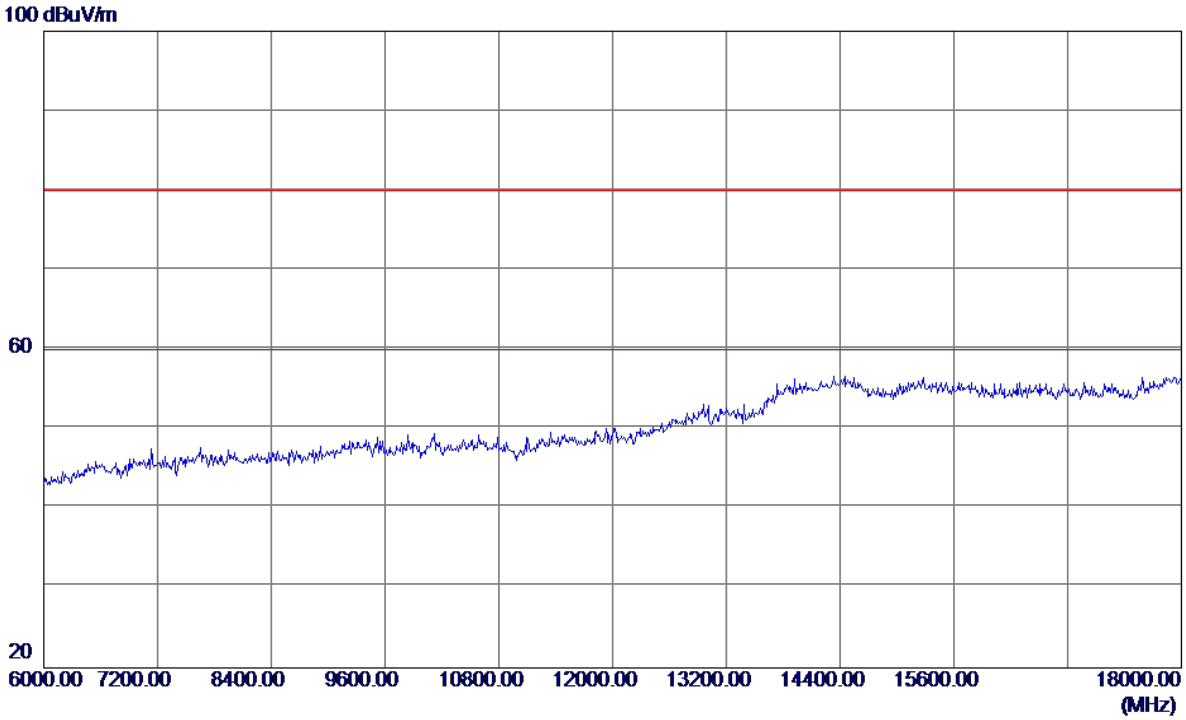


| No. | Freq. | Reading Level | Correct Factor | Measure ment | Limit | Margin | | |
|---|---|---|---|---|---|---|---|---|
| | MHz | dBuV/m | dB | dBuV/m | dBuV/m | dB | Detector | Comment |

| | |
|---|---|
| Orthogonal Axis: | X |
| Test Mode: | UNII-1/ TX N20 Mode 5240MHz |


**Vertical**

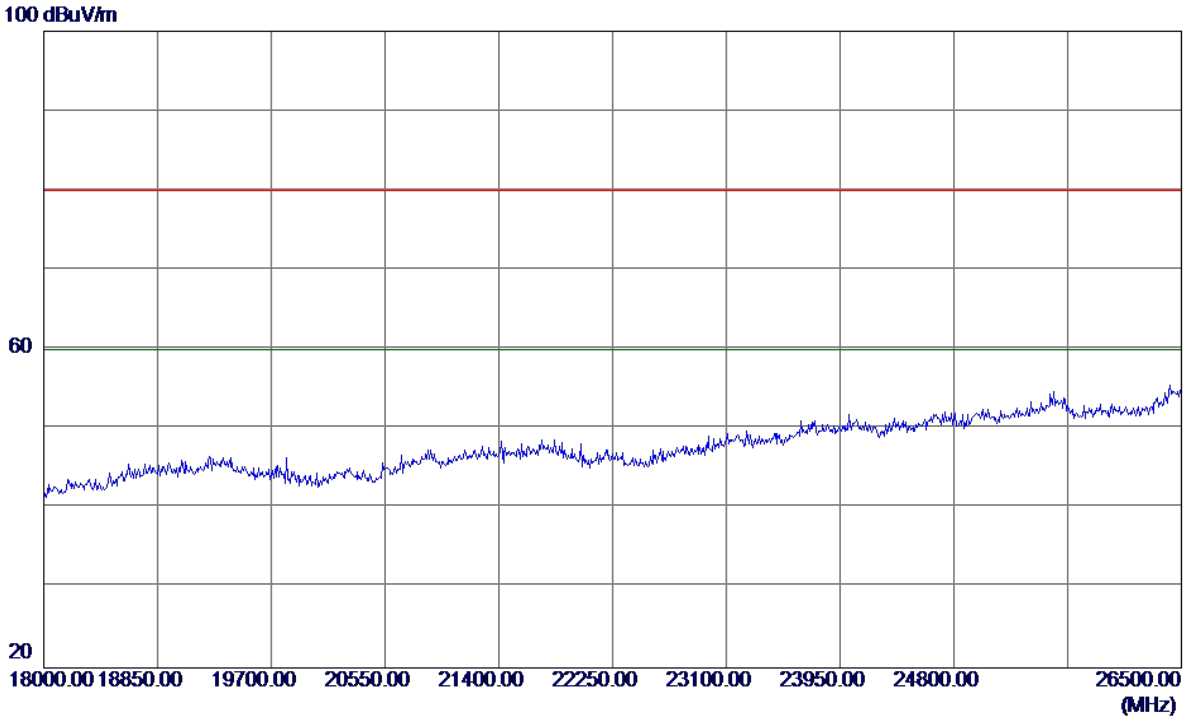


| No. | Freq. | Reading Level | Correct Factor | Measure ment | Limit | Margin | | |
|---|---|---|---|---|---|---|---|---|
| | MHz | dBuV/m | dB | dBuV/m | dBuV/m | dB | Detector | Comment |

| | |
|---|---|
| Orthogonal Axis: | X |
| Test Mode: | UNII-1/ TX N20 Mode 5240MHz |


**Vertical**

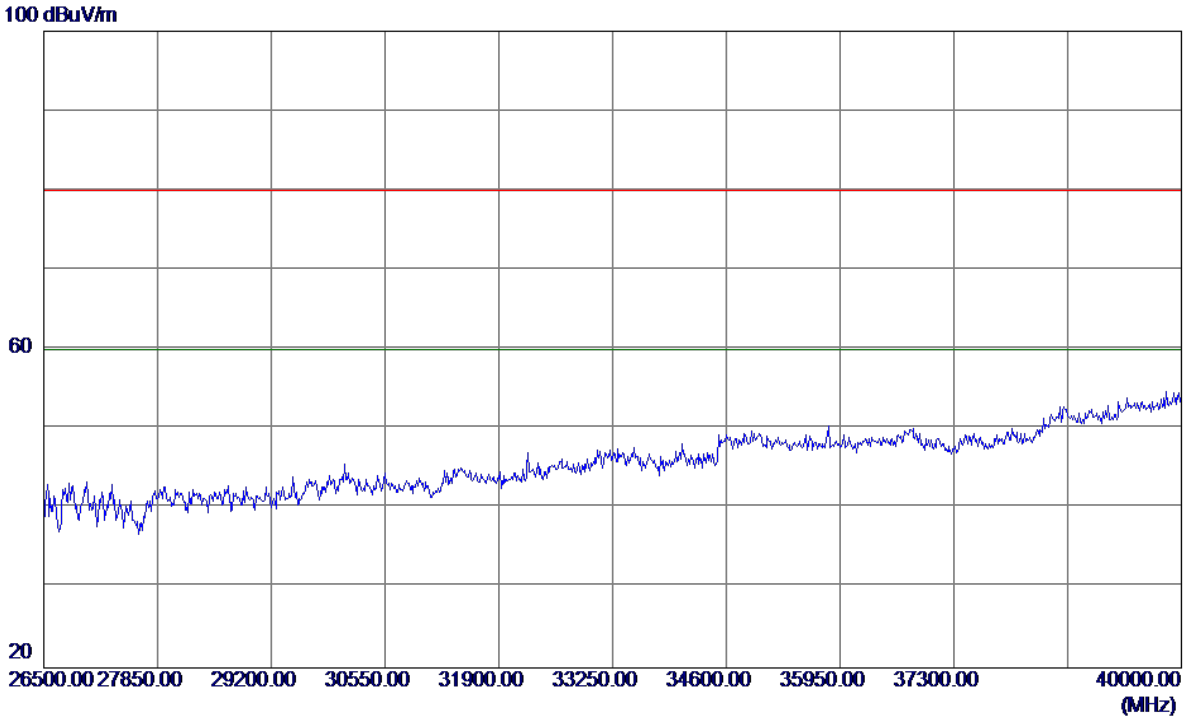


| No. | Freq. | Reading Level | Correct Factor | Measure ment | Limit | Margin | | |
|---|---|---|---|---|---|---|---|---|
| | MHz | dBuV/m | dB | dBuV/m | dBuV/m | dB | Detector | Comment |

| | |
|---|---|
| Orthogonal Axis: | X |
| Test Mode: | UNII-1/ TX N20 Mode 5240MHz |


**Horizontal**

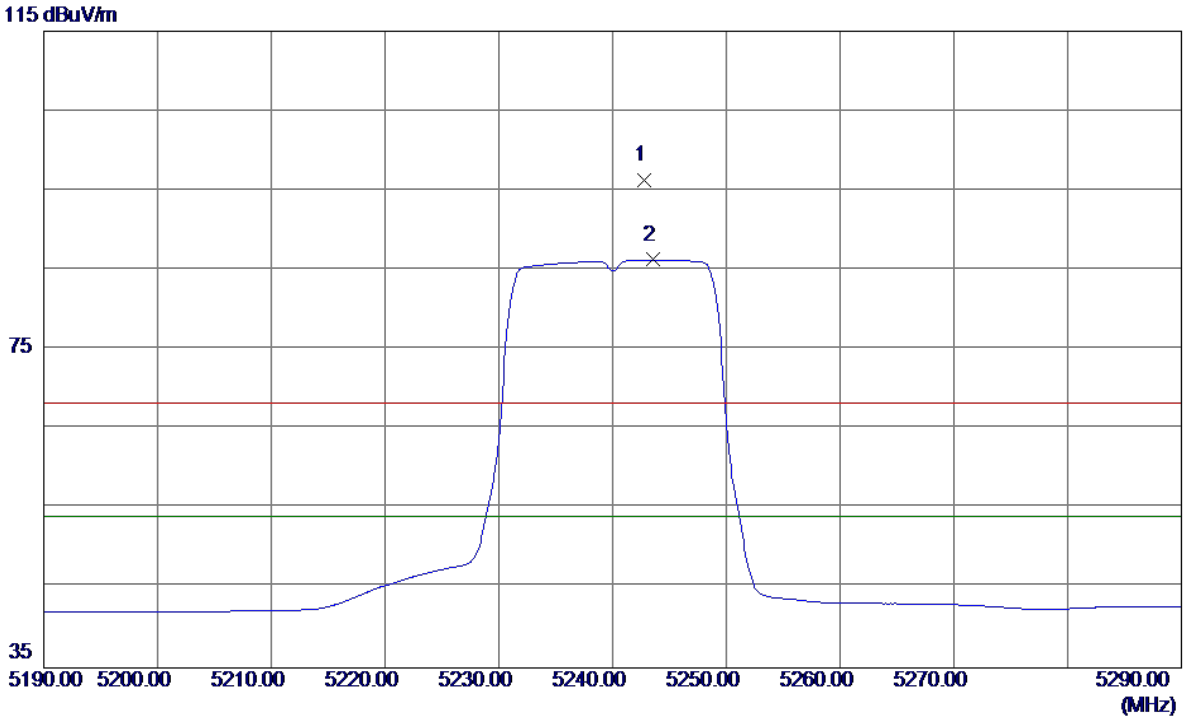


| No. | Freq. | Reading Level | Correct Factor | Measure ment | Limit | Margin | | |
|---|---|---|---|---|---|---|---|---|
| | MHz | dBuV/m | dB | dBuV/m | dBuV/m | dB | Detector | Comment |
| 1 | 5242.8000 | 54.64 | 41.57 | 96.21 | 68.30 | 27.91 | Peak | No Limit |
| 2 * | 5243.6000 | 44.70 | 41.58 | 86.28 | 54.00 | 32.28 | AVG | No Limit |

| | |
|---|---|
| Orthogonal Axis: | X |
| Test Mode: | UNII-1/ TX N20 Mode 5240MHz |


**Horizontal**

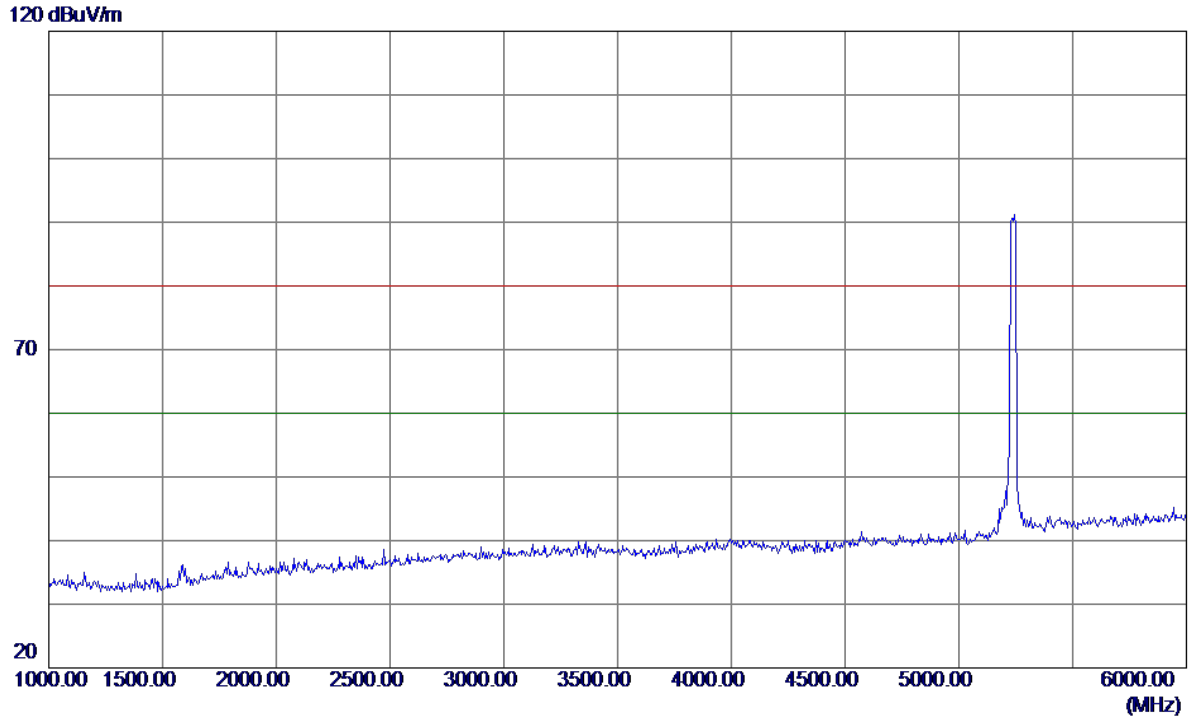


| No. | Freq. | Reading Level | Correct Factor | Measure ment | Limit | Margin | | |
|---|---|---|---|---|---|---|---|---|
| | MHz | dBuV/m | dB | dBuV/m | dBuV/m | dB | Detector | Comment |

| | |
|---|---|
| Orthogonal Axis: | X |
| Test Mode: | UNII-1/ TX N20 Mode 5240MHz |


**Horizontal**

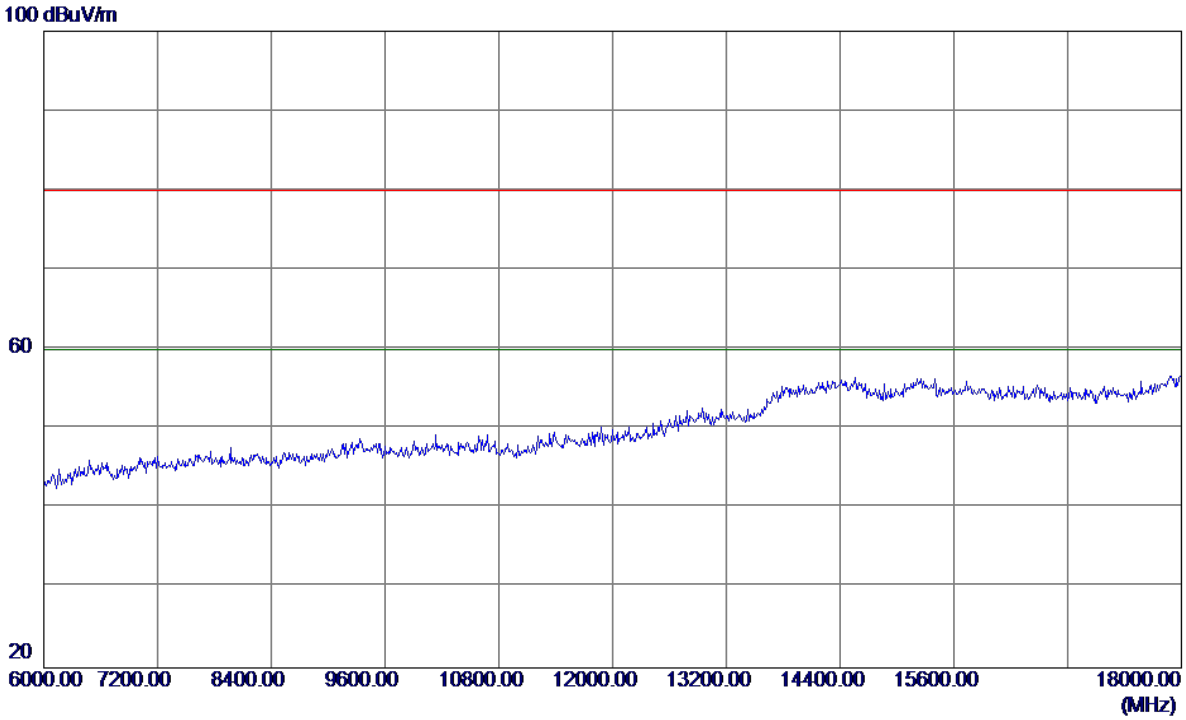


| No. | Freq. | Reading Level | Correct Factor | Measure ment | Limit | Margin | | |
|---|---|---|---|---|---|---|---|---|
| | MHz | dBuV/m | dB | dBuV/m | dBuV/m | dB | Detector | Comment |

| | |
|---|---|
| Orthogonal Axis: | X |
| Test Mode: | UNII-1/ TX N20 Mode 5240MHz |


**Horizontal**

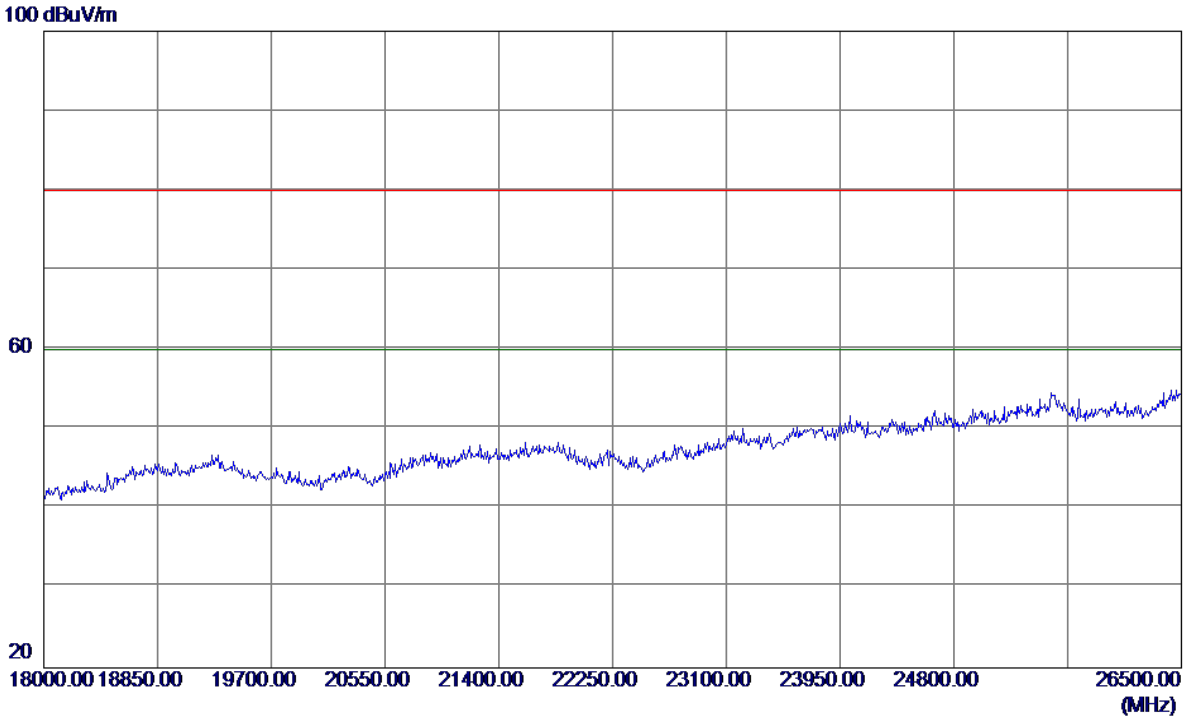


| No. | Freq. | Reading Level | Correct Factor | Measure ment | Limit | Margin | | |
|---|---|---|---|---|---|---|---|---|
| | MHz | dBuV/m | dB | dBuV/m | dBuV/m | dB | Detector | Comment |

| | |
|---|---|
| Orthogonal Axis: | X |
| Test Mode: | UNII-1/ TX N20 Mode 5240MHz |


**Horizontal**

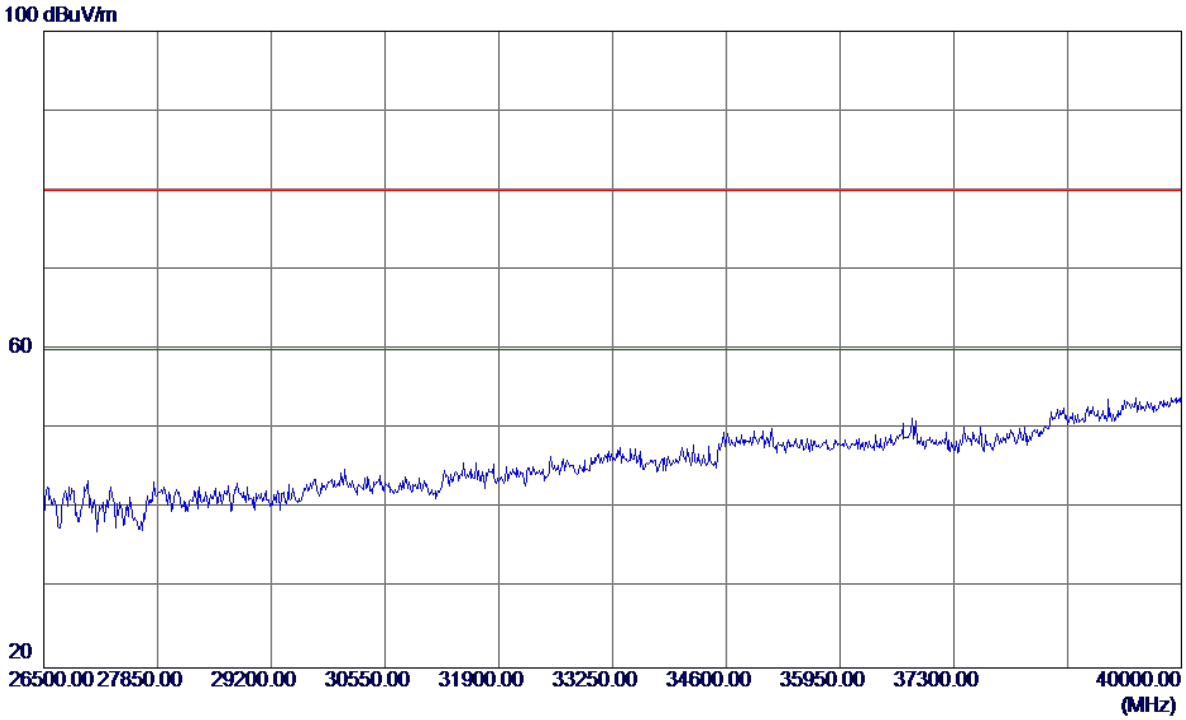


| No. | Freq. | Reading Level | Correct Factor | Measure ment | Limit | Margin | | |
|---|---|---|---|---|---|---|---|---|
| | MHz | dBuV/m | dB | dBuV/m | dBuV/m | dB | Detector | Comment |

| | |
|---|---|
| Orthogonal Axis: | X |
| Test Mode: | UNII-1/ TX N40 Mode 5190MHz |


**Vertical**

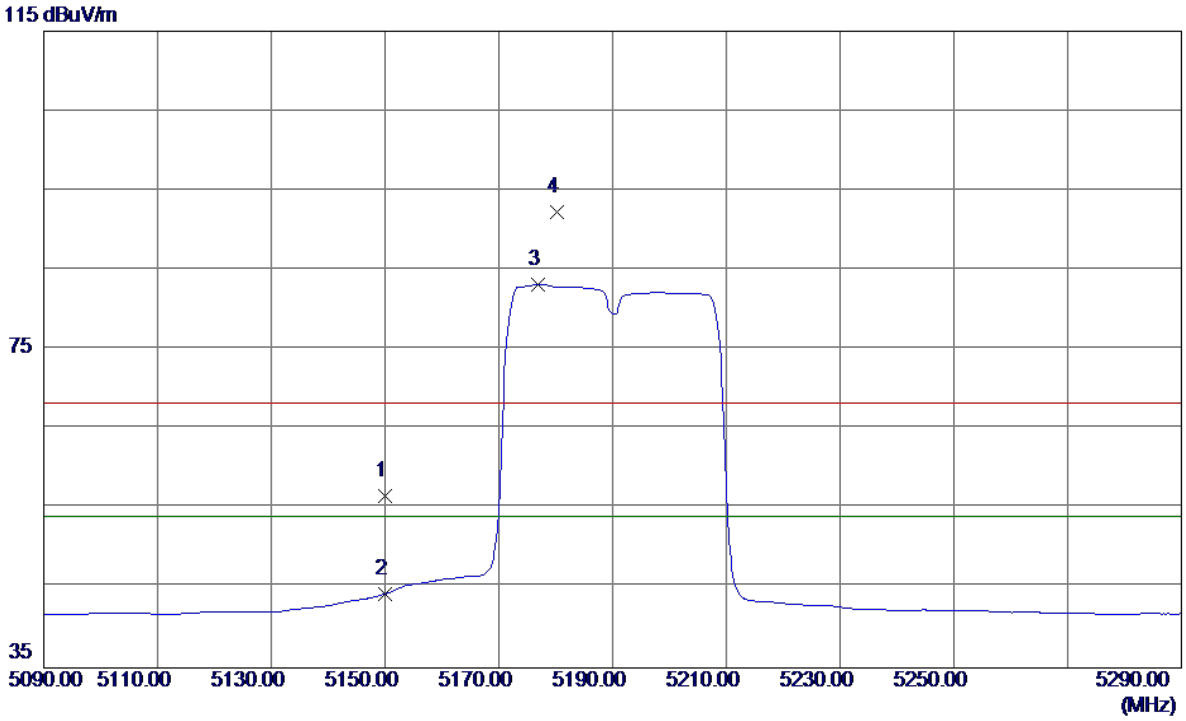


| No. | Freq. | Reading Level | Correct Factor | Measure ment | Limit | Margin | | |
|---|---|---|---|---|---|---|---|---|
| | MHz | dBuV/m | dB | dBuV/m | dBuV/m | dB | Detector | Comment |
| 1 | 5150.0000 | 15.49 | 41.10 | 56.59 | 68.30 | -11.71 | Peak | |
| 2 | 5150.0000 | 3.19 | 41.10 | 44.29 | 54.00 | -9.71 | AVG | |
| 3 * | 5176.8000 | 41.90 | 41.24 | 83.14 | 54.00 | 29.14 | AVG | No Limit |
| 4 | 5180.2000 | 51.06 | 41.26 | 92.32 | 68.30 | 24.02 | Peak | No Limit |

| | |
|---|---|
| Orthogonal Axis: | X |
| Test Mode: | UNII-1/ TX N40 Mode 5190MHz |


**Vertical**

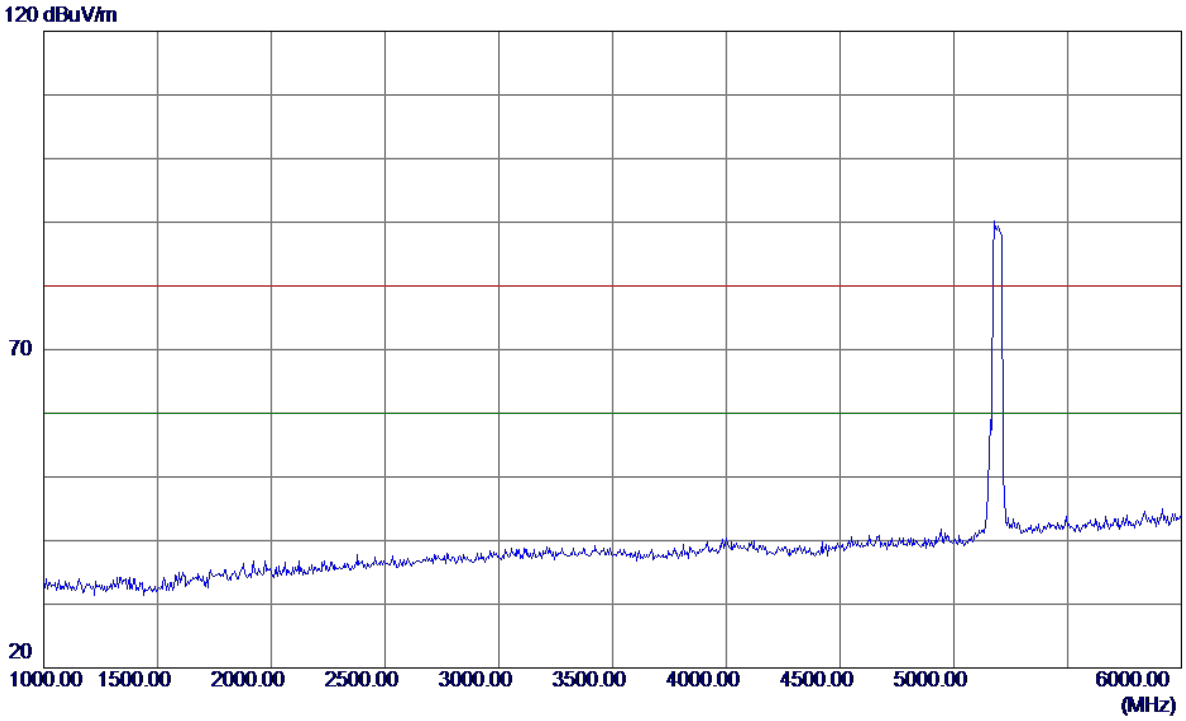


| No. | Freq. | Reading Level | Correct Factor | Measure ment | Limit | Margin | | |
|---|---|---|---|---|---|---|---|---|
| | MHz | dBuV/m | dB | dBuV/m | dBuV/m | dB | Detector | Comment |

| | |
|---|---|
| Orthogonal Axis: | X |
| Test Mode: | UNII-1/ TX N40 Mode 5190MHz |


**Vertical**

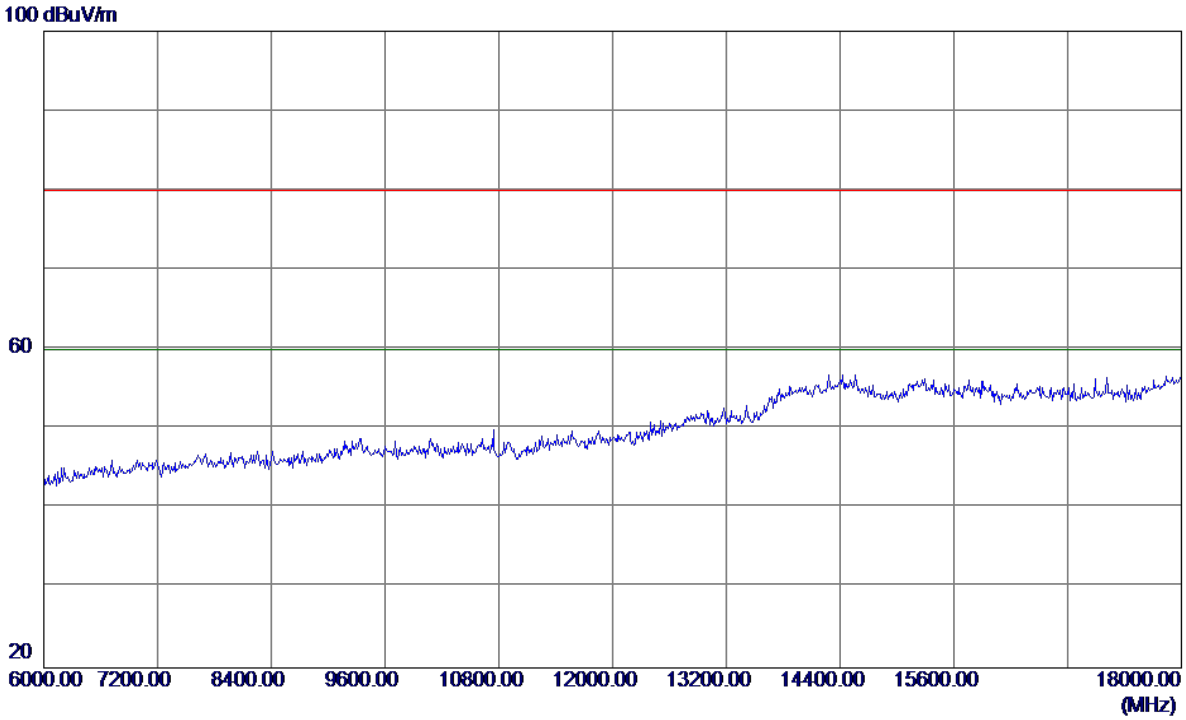


| No. | Freq. | Reading Level | Correct Factor | Measure ment | Limit | Margin | | |
|---|---|---|---|---|---|---|---|---|
| | MHz | dBuV/m | dB | dBuV/m | dBuV/m | dB | Detector | Comment |

| | |
|---|---|
| Orthogonal Axis: | X |
| Test Mode: | UNII-1/ TX N40 Mode 5190MHz |


**Vertical**

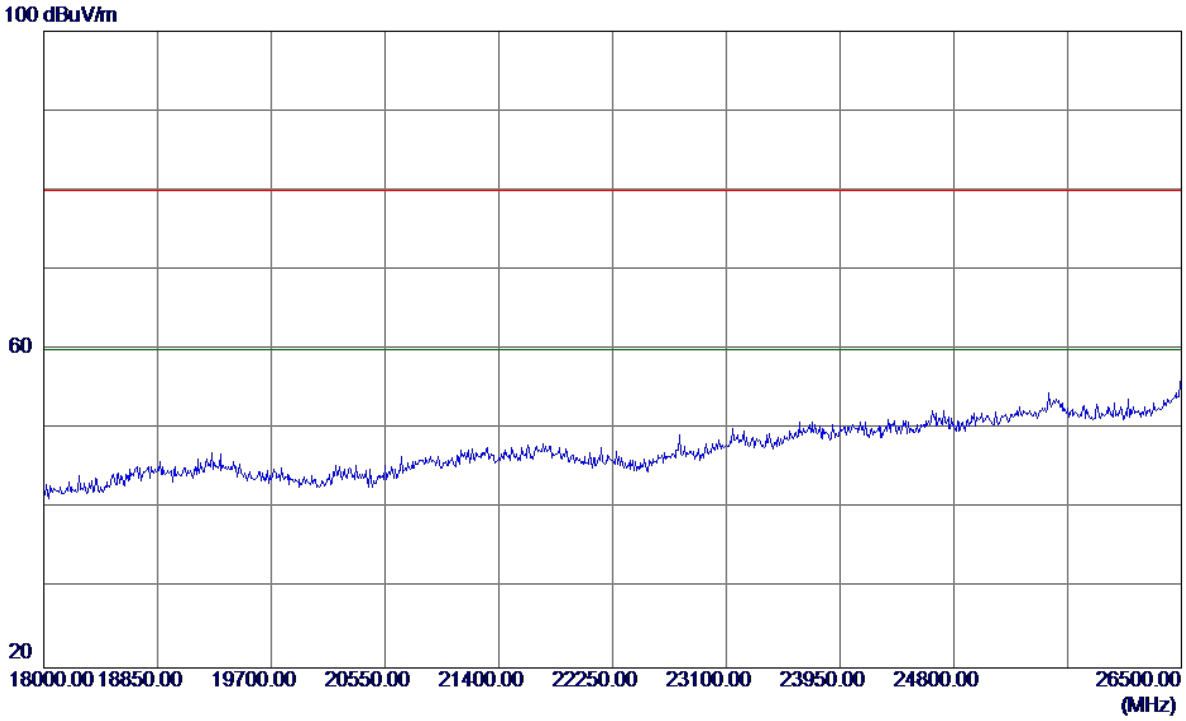


| No. | Freq. | Reading Level | Correct Factor | Measure ment | Limit | Margin | | |
|---|---|---|---|---|---|---|---|---|
| | MHz | dBuV/m | dB | dBuV/m | dBuV/m | dB | Detector | Comment |

| | |
|---|---|
| Orthogonal Axis: | X |
| Test Mode: | UNII-1/ TX N40 Mode 5190MHz |


**Vertical**

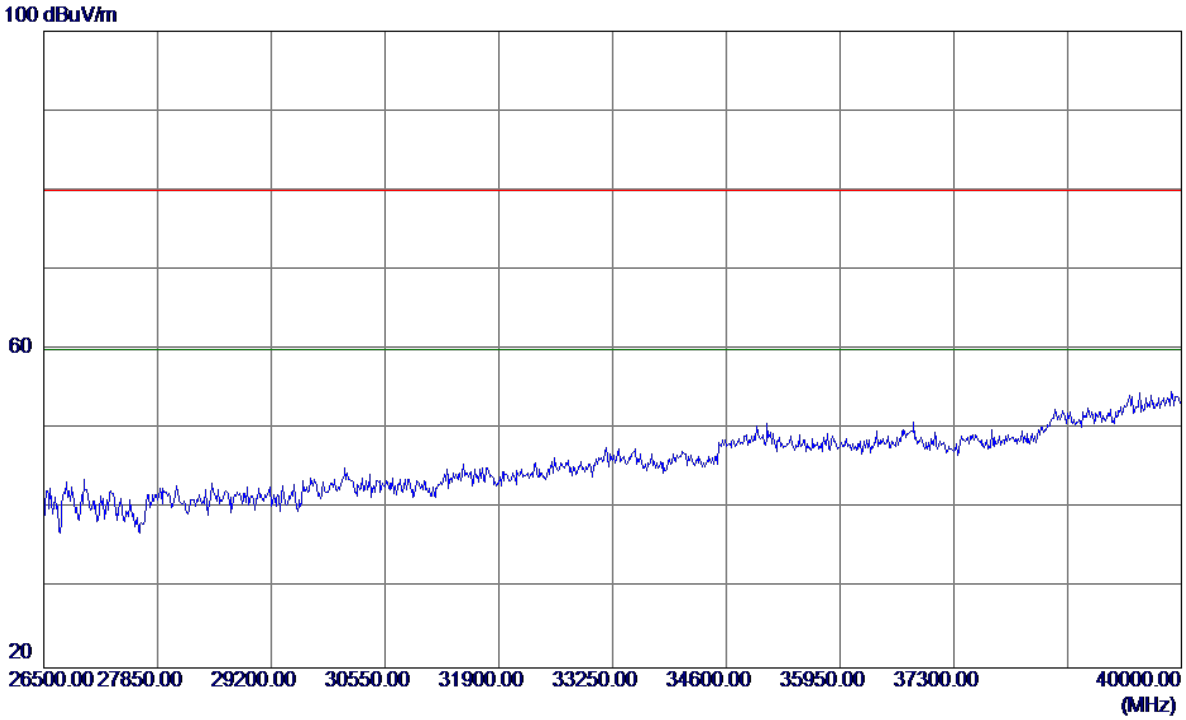


| No. | Freq. | Reading Level | Correct Factor | Measure ment | Limit | Margin | | |
|---|---|---|---|---|---|---|---|---|
| | MHz | dBuV/m | dB | dBuV/m | dBuV/m | dB | Detector | Comment |

| | |
|---|---|
| Orthogonal Axis: | X |
| Test Mode: | UNII-1/ TX N40 Mode 5190MHz |


**Horizontal**

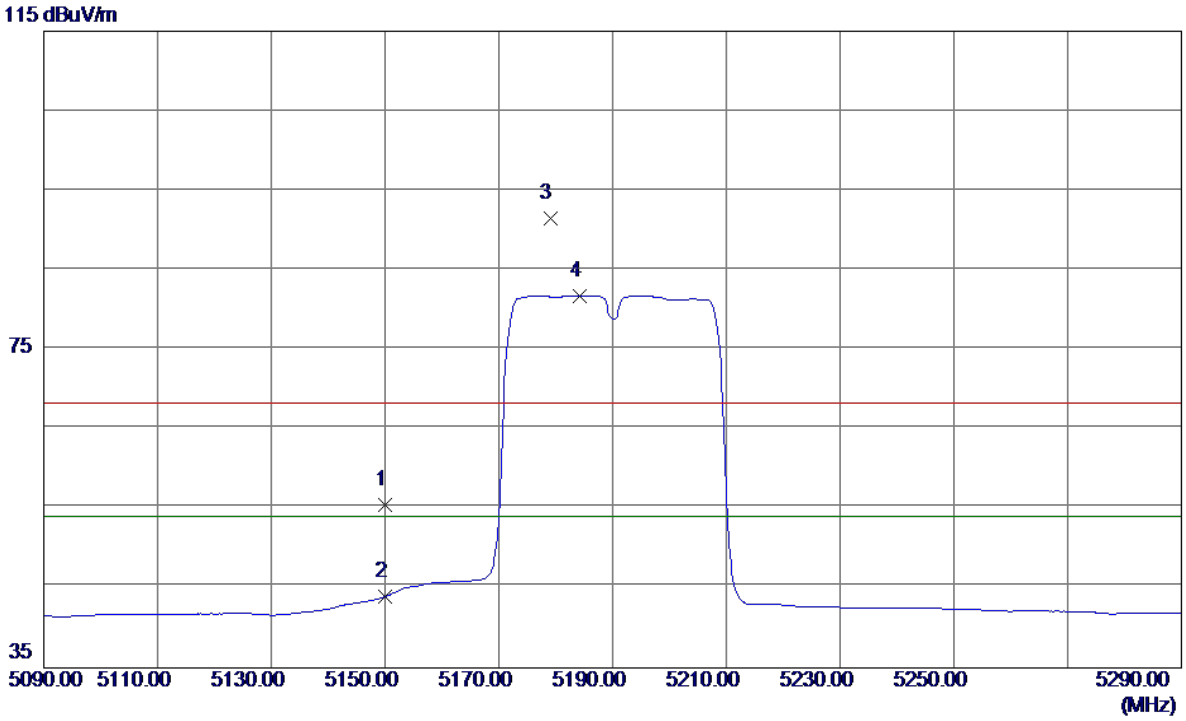


| No. | Freq. | Reading Level | Correct Factor | Measure ment | Limit | Margin | | |
|---|---|---|---|---|---|---|---|---|
| | MHz | dBuV/m | dB | dBuV/m | dBuV/m | dB | Detector | Comment |
| 1 | 5150.0000 | 14.39 | 41.10 | 55.49 | 68.30 | -12.81 | Peak | |
| 2 | 5150.0000 | 2.85 | 41.10 | 43.95 | 54.00 | -10.05 | AVG | |
| 3 | 5179.0000 | 50.27 | 41.25 | 91.52 | 68.30 | 23.22 | Peak | No Limit |
| 4 * | 5184.2000 | 40.50 | 41.28 | 81.78 | 54.00 | 27.78 | AVG | No Limit |

| | |
|---|---|
| Orthogonal Axis: | X |
| Test Mode: | UNII-1/ TX N40 Mode 5190MHz |


**Horizontal**

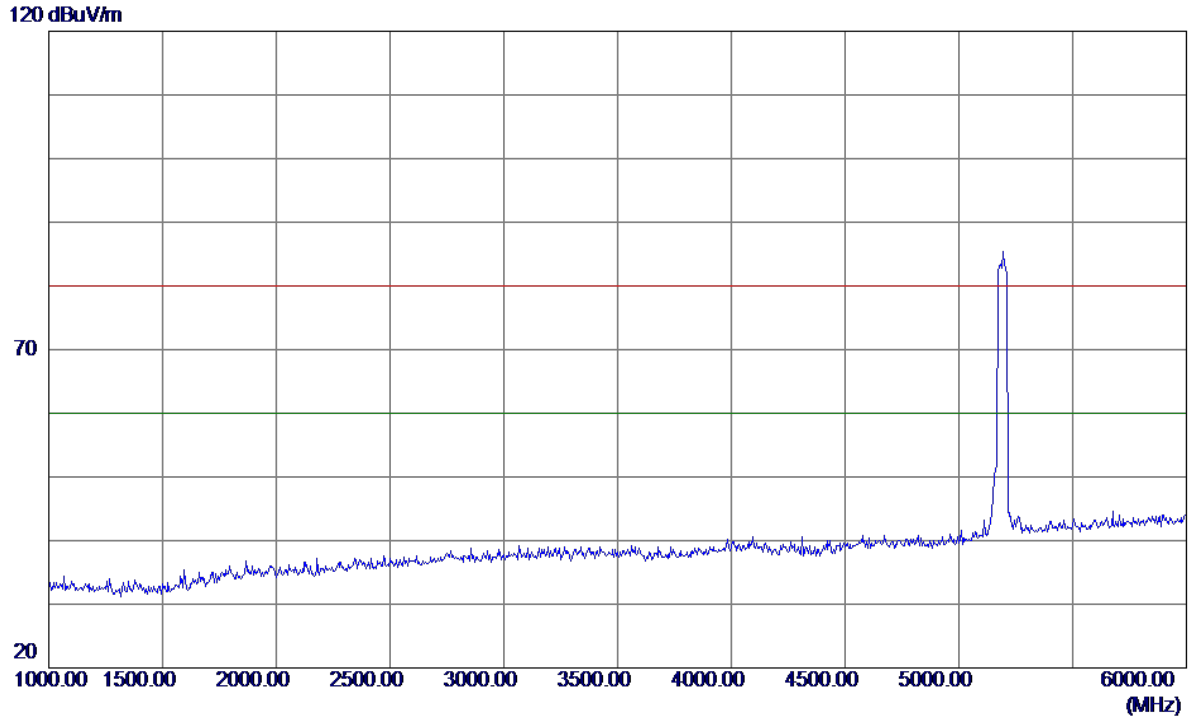


| No. | Freq. | Reading Level | Correct Factor | Measure ment | Limit | Margin | | |
|---|---|---|---|---|---|---|---|---|
| | MHz | dBuV/m | dB | dBuV/m | dBuV/m | dB | Detector | Comment |

| | |
|---|---|
| Orthogonal Axis: | X |
| Test Mode: | UNII-1/ TX N40 Mode 5190MHz |


**Horizontal**

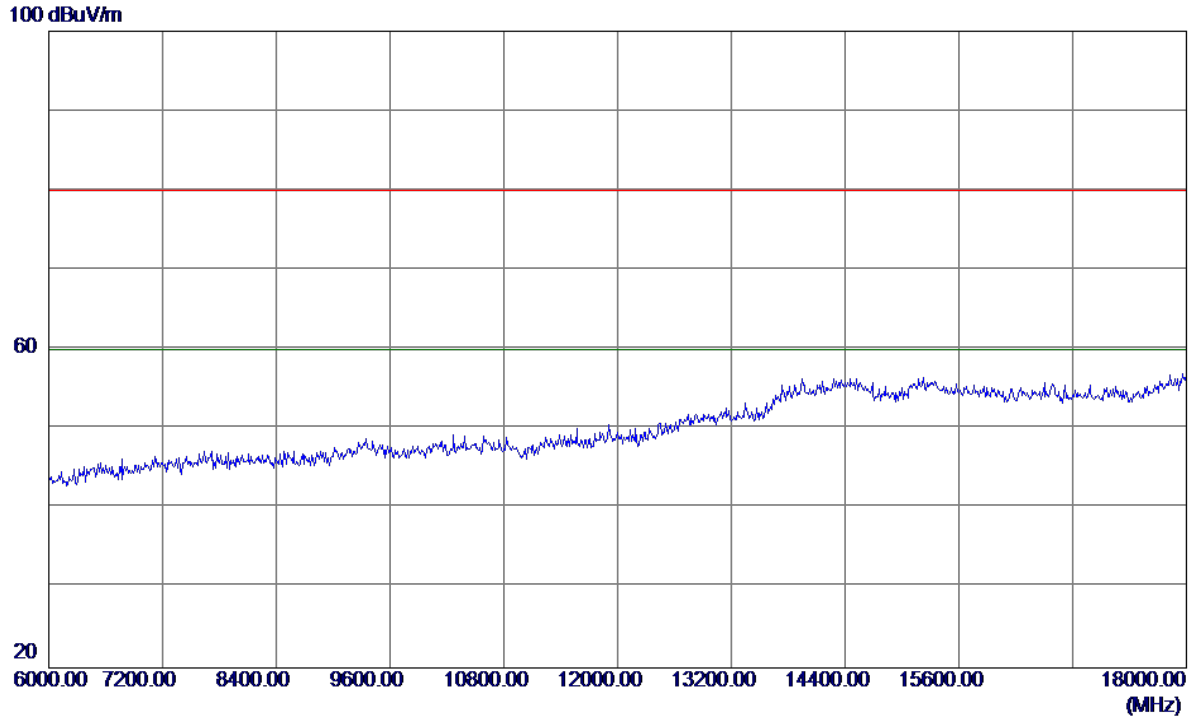


| No. | Freq. | Reading Level | Correct Factor | Measure ment | Limit | Margin | | |
|---|---|---|---|---|---|---|---|---|
| | MHz | dBuV/m | dB | dBuV/m | dBuV/m | dB | Detector | Comment |

| | |
|---|---|
| Orthogonal Axis: | X |
| Test Mode: | UNII-1/ TX N40 Mode 5190MHz |


**Horizontal**

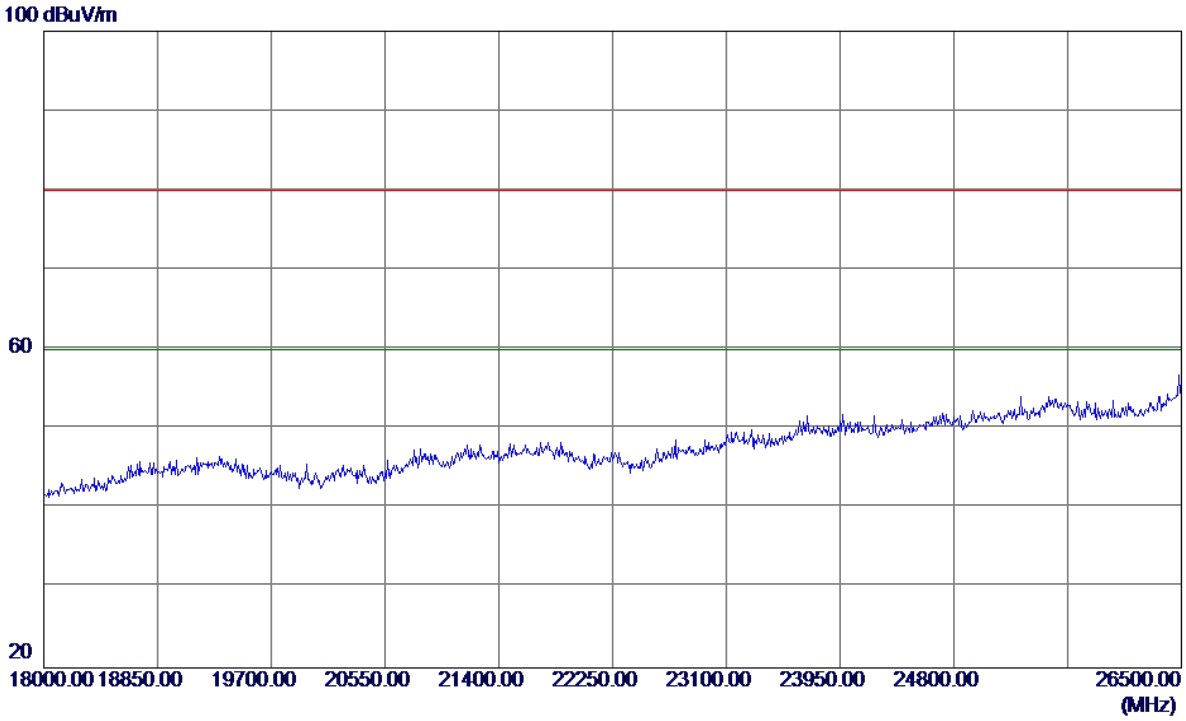


| No. | Freq. | Reading Level | Correct Factor | Measure ment | Limit | Margin | | |
|---|---|---|---|---|---|---|---|---|
| | MHz | dBuV/m | dB | dBuV/m | dBuV/m | dB | Detector | Comment |

| | |
|---|---|
| Orthogonal Axis: | X |
| Test Mode: | UNII-1/ TX N40 Mode 5190MHz |


**Horizontal**

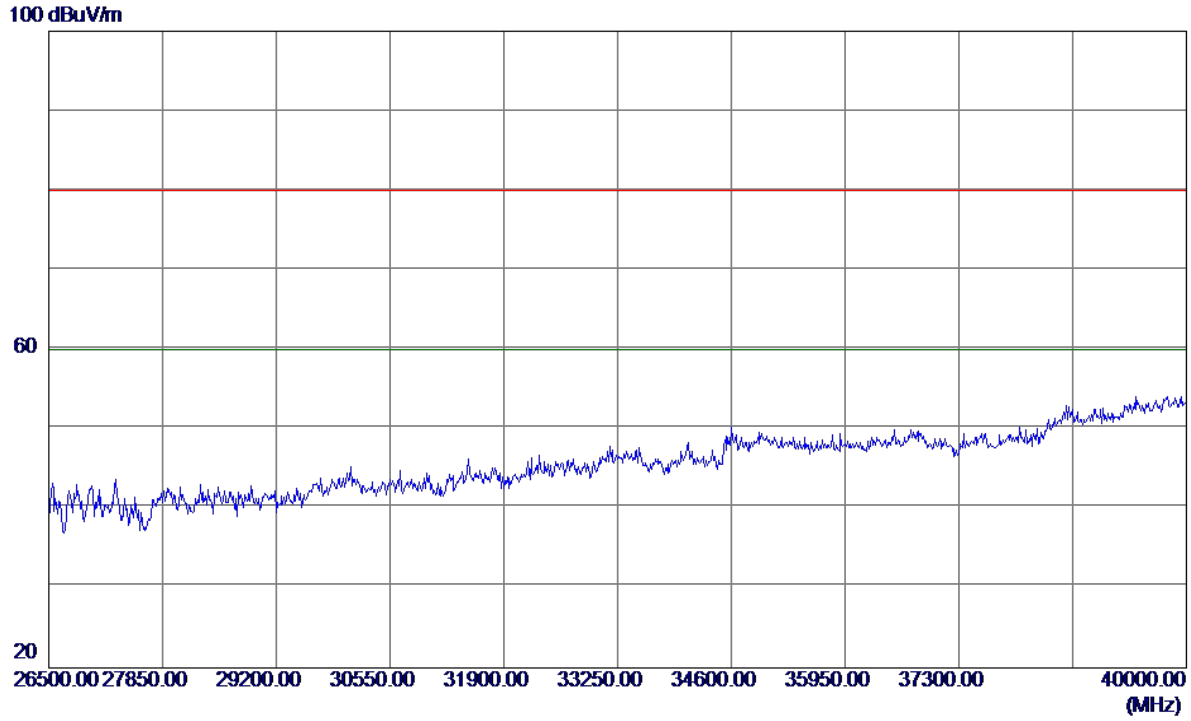


| No. | Freq. | Reading Level | Correct Factor | Measure ment | Limit | Margin | | |
|---|---|---|---|---|---|---|---|---|
| | MHz | dBuV/m | dB | dBuV/m | dBuV/m | dB | Detector | Comment |

| | |
|---|---|
| Orthogonal Axis: | X |
| Test Mode: | UNII-1/ TX N40 Mode 5230MHz |


**Vertical**

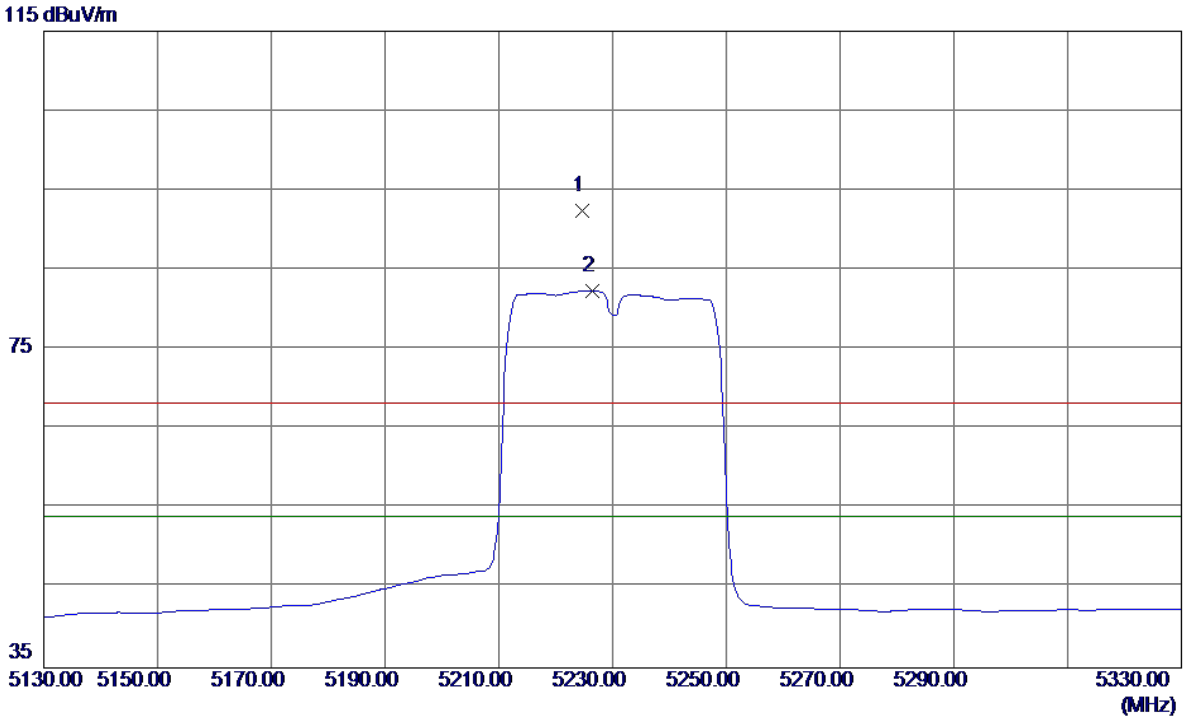


| No. | Freq. | Reading Level | Correct Factor | Measure ment | Limit | Margin | | |
|---|---|---|---|---|---|---|---|---|
| | MHz | dBuV/m | dB | dBuV/m | dBuV/m | dB | Detector | Comment |
| 1 | 5224.6000 | 50.91 | 41.48 | 92.39 | 68.30 | 24.09 | Peak | No Limit |
| 2 * | 5226.4000 | 40.87 | 41.49 | 82.36 | 54.00 | 28.36 | AVG | No Limit |

| | |
|---|---|
| Orthogonal Axis: | X |
| Test Mode: | UNII-1/ TX N40 Mode 5230MHz |


**Vertical**

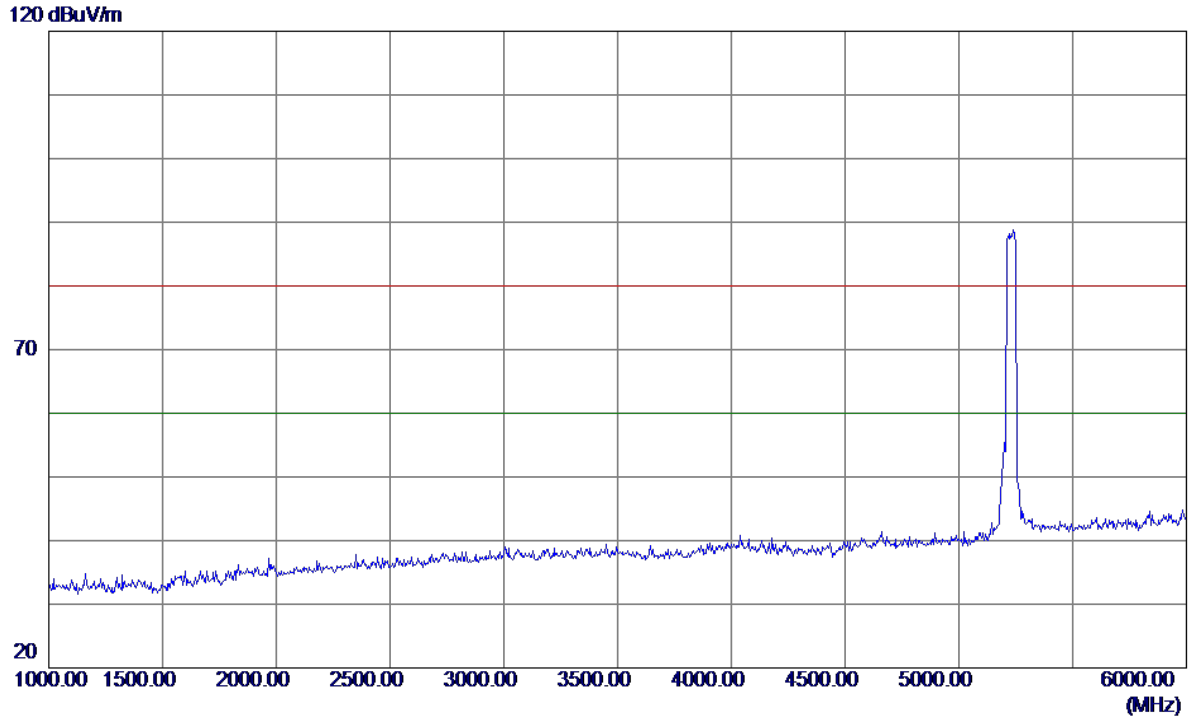


| No. | Freq. | Reading Level | Correct Factor | Measure ment | Limit | Margin | | |
|---|---|---|---|---|---|---|---|---|
| | MHz | dBuV/m | dB | dBuV/m | dBuV/m | dB | Detector | Comment |

| | |
|---|---|
| Orthogonal Axis: | X |
| Test Mode: | UNII-1/ TX N40 Mode 5230MHz |


**Vertical**

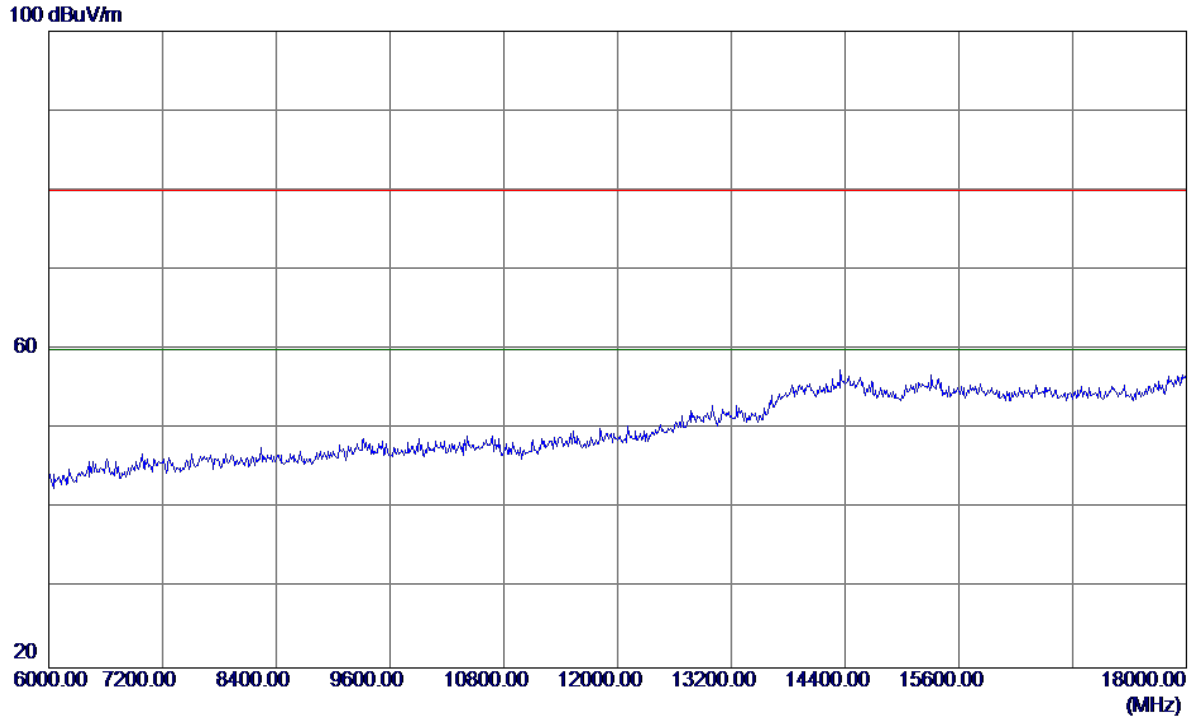


| No. | Freq. | Reading Level | Correct Factor | Measure ment | Limit | Margin | | |
|---|---|---|---|---|---|---|---|---|
| | MHz | dBuV/m | dB | dBuV/m | dBuV/m | dB | Detector | Comment |

| | |
|---|---|
| Orthogonal Axis: | X |
| Test Mode: | UNII-1/ TX N40 Mode 5230MHz |


**Vertical**

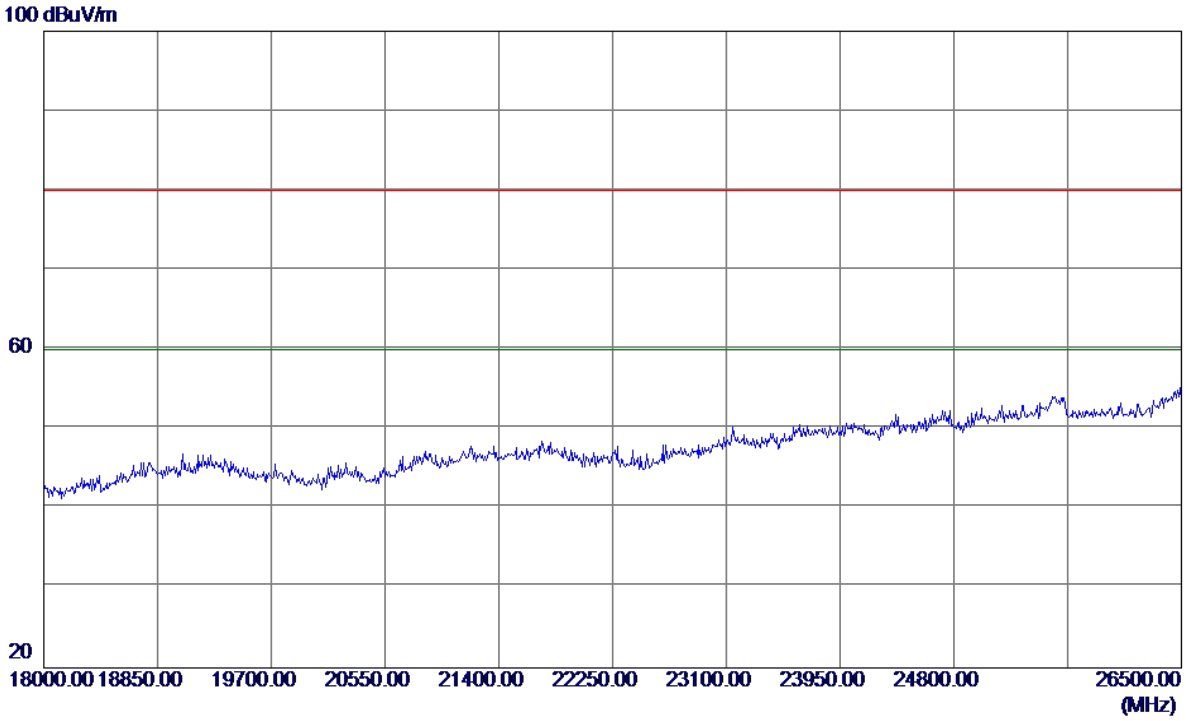


| No. | Freq. | Reading Level | Correct Factor | Measure ment | Limit | Margin | | |
|---|---|---|---|---|---|---|---|---|
| | MHz | dBuV/m | dB | dBuV/m | dBuV/m | dB | Detector | Comment |

| | |
|---|---|
| Orthogonal Axis: | X |
| Test Mode: | UNII-1/ TX N40 Mode 5230MHz |


**Vertical**

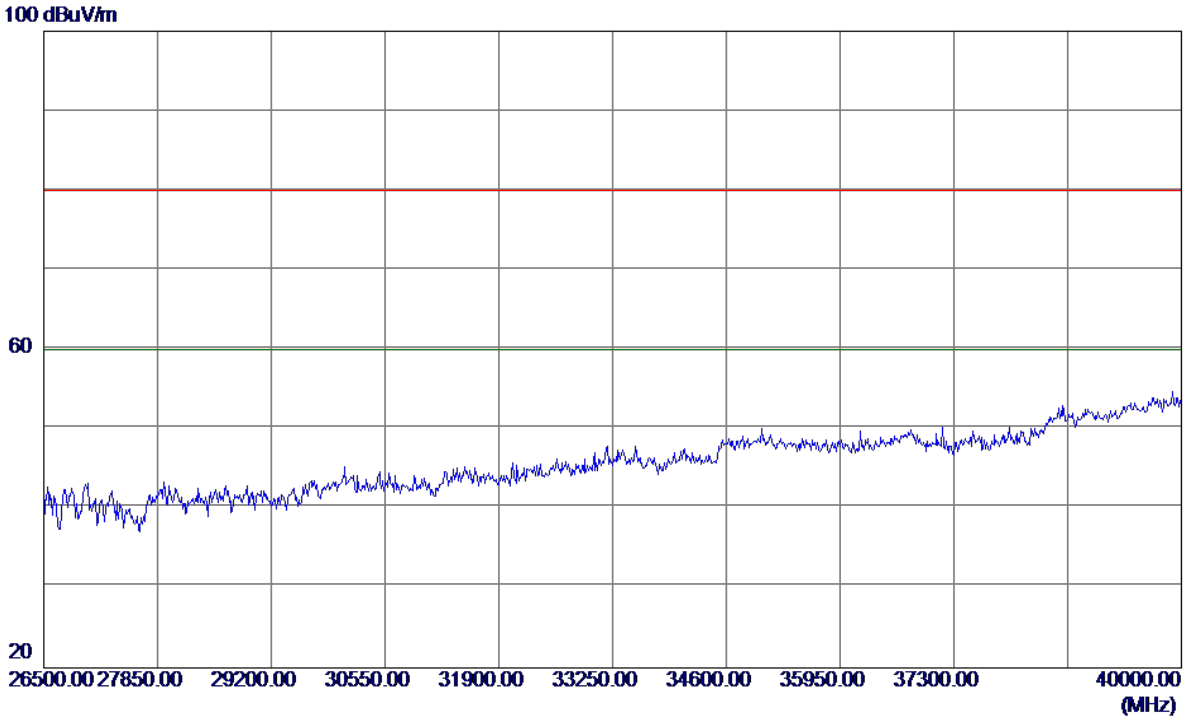


| No. | Freq. | Reading Level | Correct Factor | Measure ment | Limit | Margin | | |
|---|---|---|---|---|---|---|---|---|
| | MHz | dBuV/m | dB | dBuV/m | dBuV/m | dB | Detector | Comment |

| | |
|---|---|
| Orthogonal Axis: | X |
| Test Mode: | UNII-1/ TX N40 Mode 5230MHz |


**Horizontal**

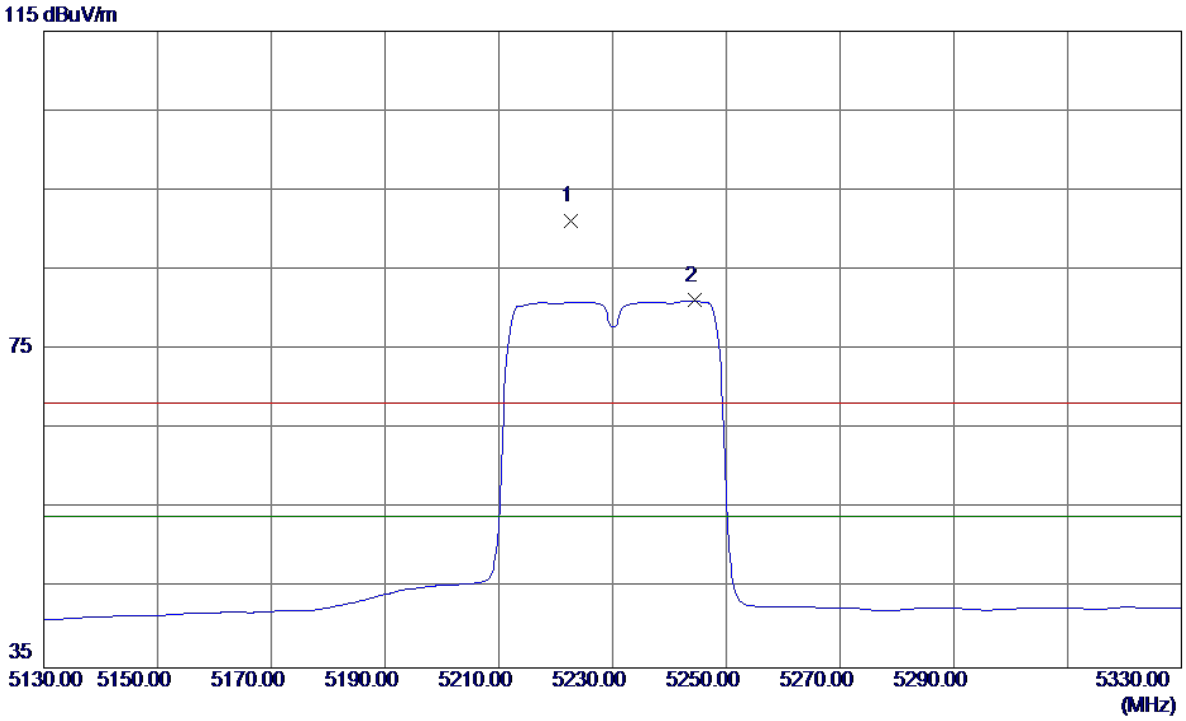


| No. | Freq. | Reading Level | Correct Factor | Measure ment | Limit | Margin | | |
|---|---|---|---|---|---|---|---|---|
| | MHz | dBuV/m | dB | dBuV/m | dBuV/m | dB | Detector | Comment |
| 1 | 5222.6000 | 49.76 | 41.47 | 91.23 | 68.30 | 22.93 | Peak | No Limit |
| 2 * | 5244.4000 | 39.58 | 41.58 | 81.16 | 54.00 | 27.16 | AVG | No Limit |

| | |
|---|---|
| Orthogonal Axis: | X |
| Test Mode: | UNII-1/ TX N40 Mode 5230MHz |


**Horizontal**

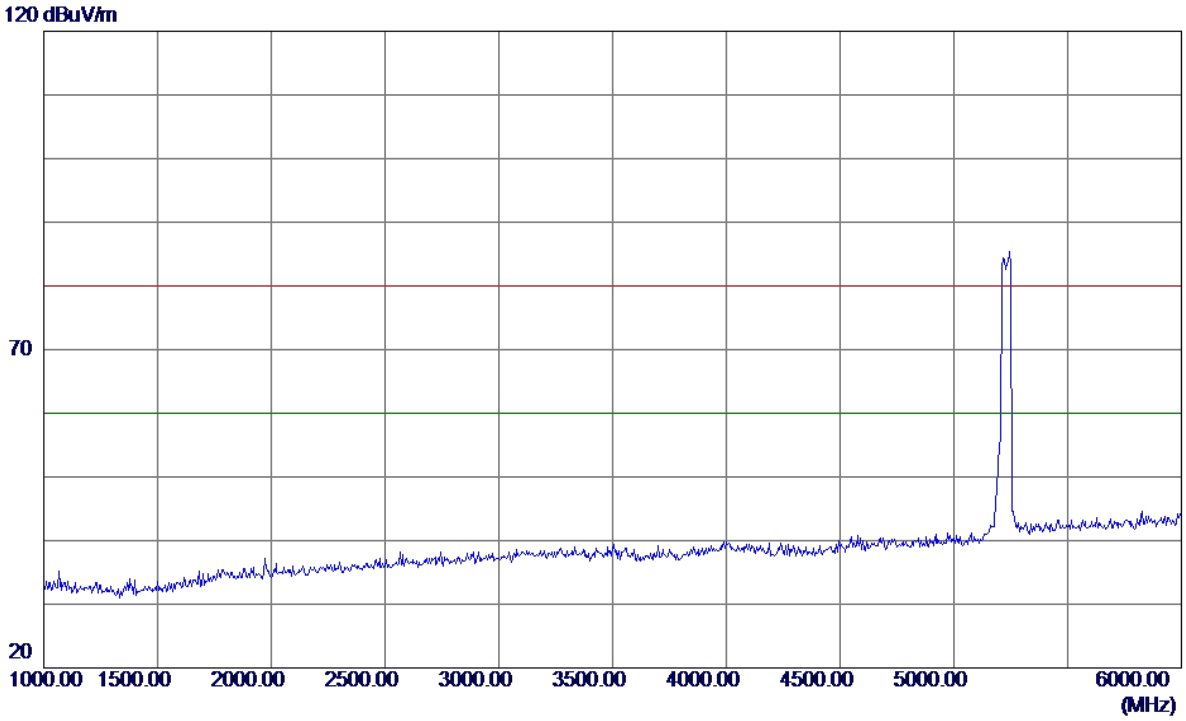


| No. | Freq. | Reading Level | Correct Factor | Measure ment | Limit | Margin | | |
|---|---|---|---|---|---|---|---|---|
| | MHz | dBuV/m | dB | dBuV/m | dBuV/m | dB | Detector | Comment |

| | |
|---|---|
| Orthogonal Axis: | X |
| Test Mode: | UNII-1/ TX N40 Mode 5230MHz |


**Horizontal**

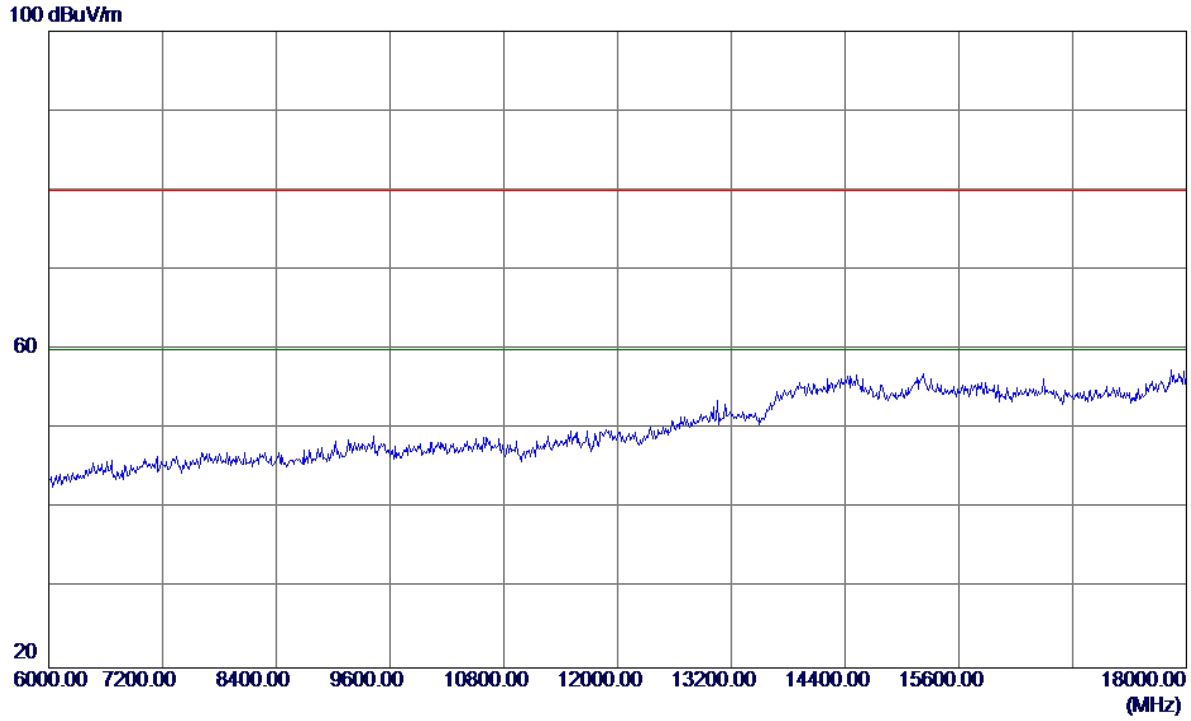


| No. | Freq. | Reading Level | Correct Factor | Measure ment | Limit | Margin | | |
|---|---|---|---|---|---|---|---|---|
| | MHz | dBuV/m | dB | dBuV/m | dBuV/m | dB | Detector | Comment |

| | |
|---|---|
| Orthogonal Axis: | X |
| Test Mode: | UNII-1/ TX N40 Mode 5230MHz |


**Horizontal**

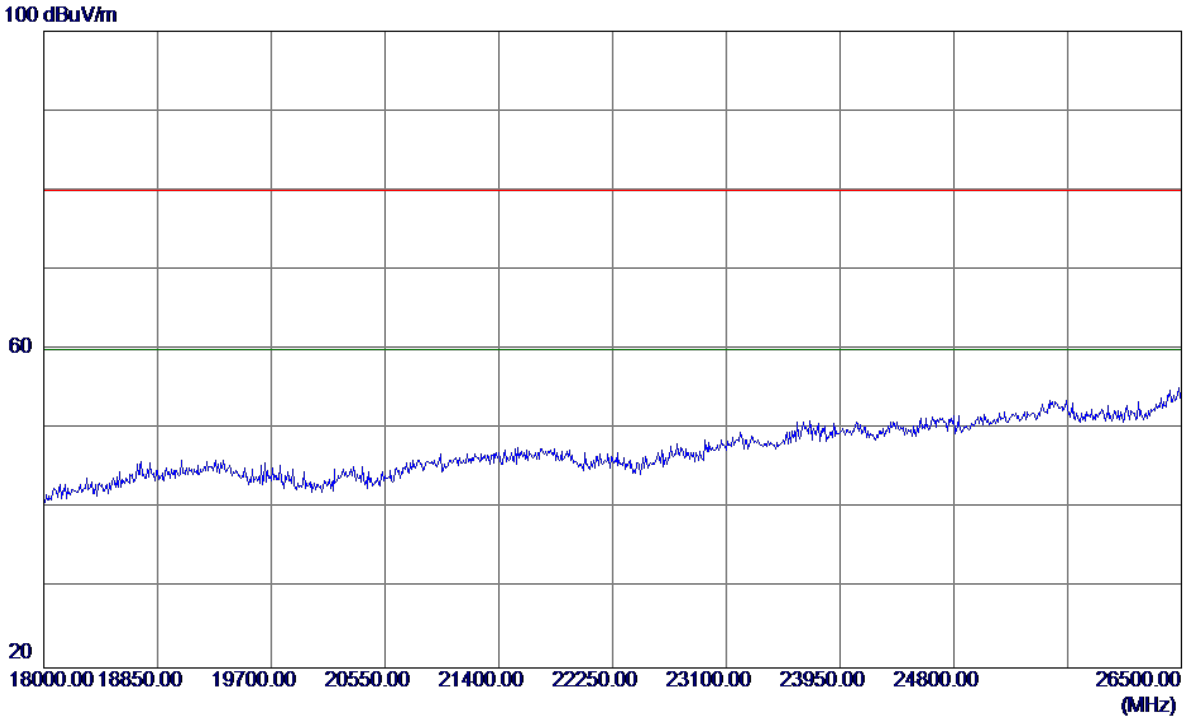


| No. | Freq. | Reading Level | Correct Factor | Measure ment | Limit | Margin | | |
|---|---|---|---|---|---|---|---|---|
| | MHz | dBuV/m | dB | dBuV/m | dBuV/m | dB | Detector | Comment |

| | |
|---|---|
| Orthogonal Axis: | X |
| Test Mode: | UNII-1/ TX N40 Mode 5230MHz |


**Horizontal**

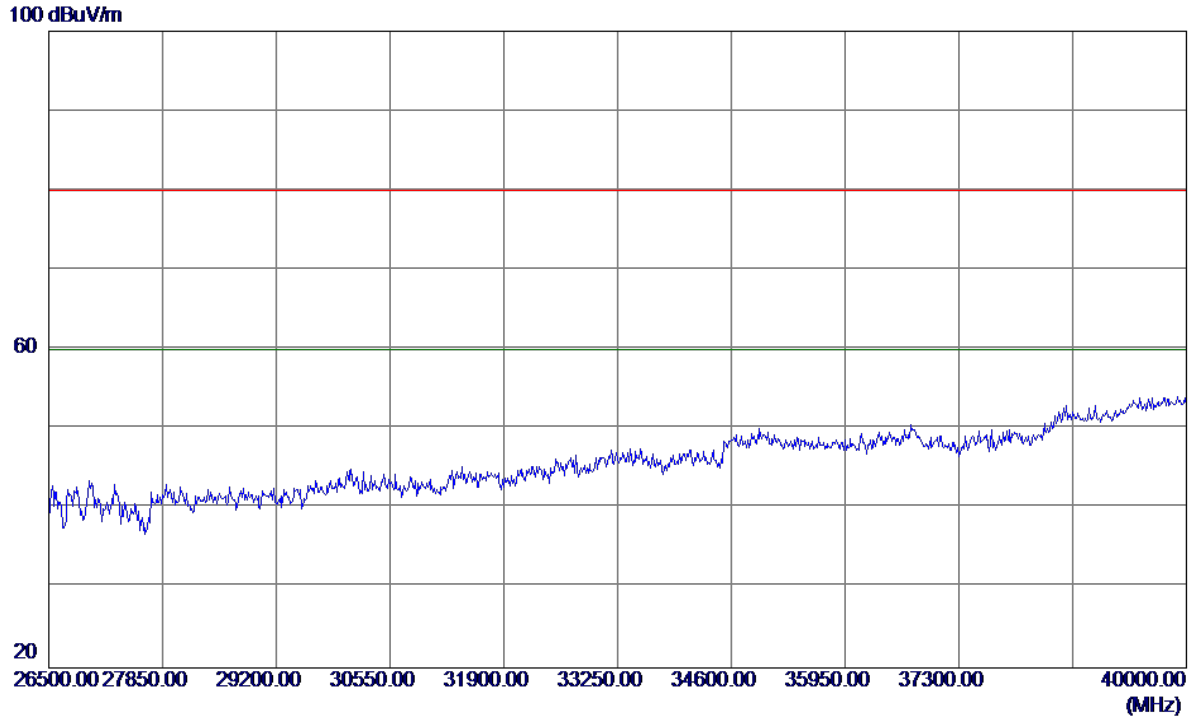


| No. | Freq. | Reading Level | Correct Factor | Measure ment | Limit | Margin | | |
|---|---|---|---|---|---|---|---|---|
| | MHz | dBuV/m | dB | dBuV/m | dBuV/m | dB | Detector | Comment |

| | |
|---|---|
| Orthogonal Axis : | X |
| Test Mode : | UNII-2A/ TX A Mode 5260MHz |


**Vertical**

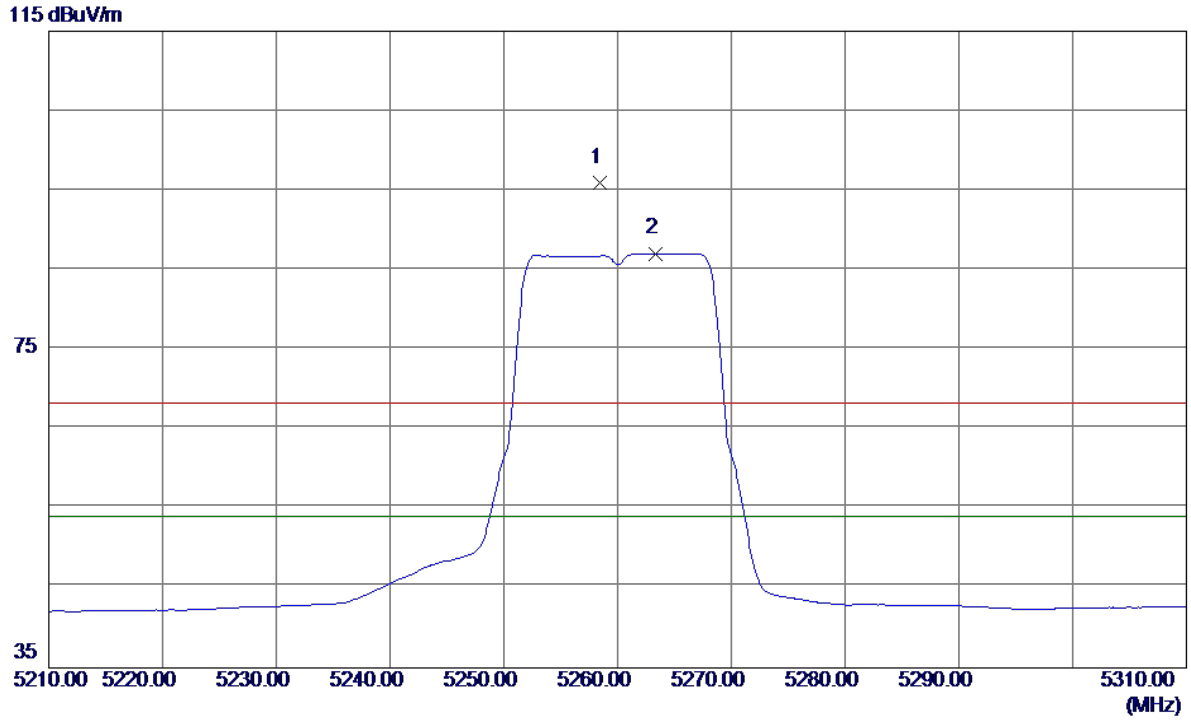


| No. | Freq. | Reading Level | Correct Factor | Measure ment | Limit | Margin | | |
|---|---|---|---|---|---|---|---|---|
| | MHz | dBuV/m | dB | dBuV/m | dBuV/m | dB | Detector | Comment |
| 1 | 5258.4000 | 54.27 | 41.65 | 95.92 | 68.30 | 27.62 | Peak | No Limit |
| 2 * | 5263.3000 | 45.40 | 41.68 | 87.08 | 54.00 | 33.08 | AVG | No Limit |

| | |
|---|---|
| Orthogonal Axis : | X |
| Test Mode : | UNII-2A/ TX A Mode 5260MHz |


**Vertical**

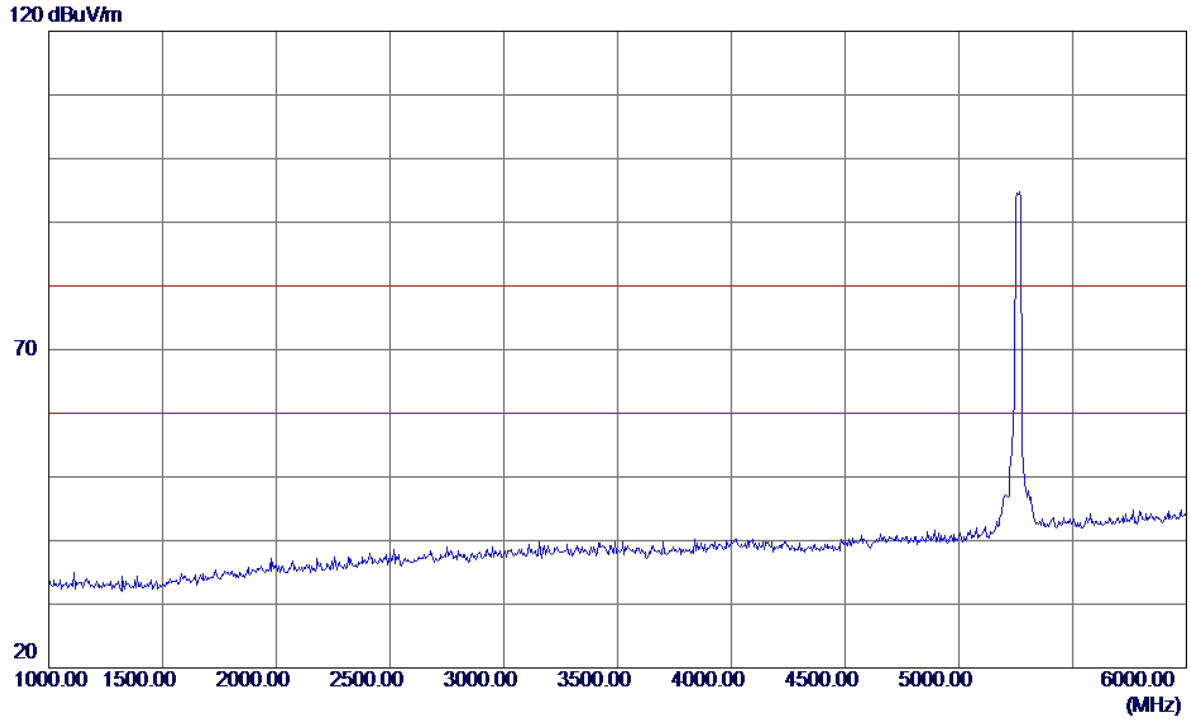


| No. | Freq. | Reading Level | Correct Factor | Measure ment | Limit | Margin | | |
|---|---|---|---|---|---|---|---|---|
| | MHz | dBuV/m | dB | dBuV/m | dBuV/m | dB | Detector | Comment |

| | |
|---|---|
| Orthogonal Axis : | X |
| Test Mode : | UNII-2A/ TX A Mode 5260MHz |


**Vertical**

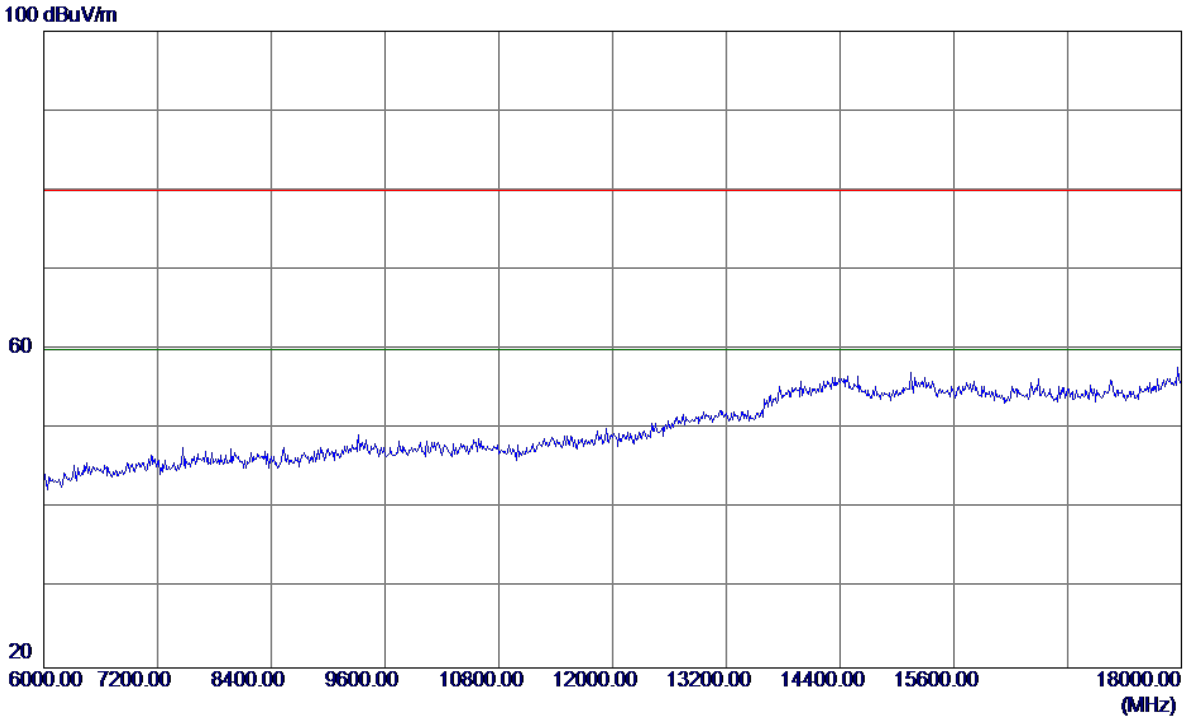


| No. | Freq. | Reading Level | Correct Factor | Measure ment | Limit | Margin | | |
|---|---|---|---|---|---|---|---|---|
| | MHz | dBuV/m | dB | dBuV/m | dBuV/m | dB | Detector | Comment |

| | |
|---|---|
| Orthogonal Axis : | X |
| Test Mode : | UNII-2A/ TX A Mode 5260MHz |


**Vertical**

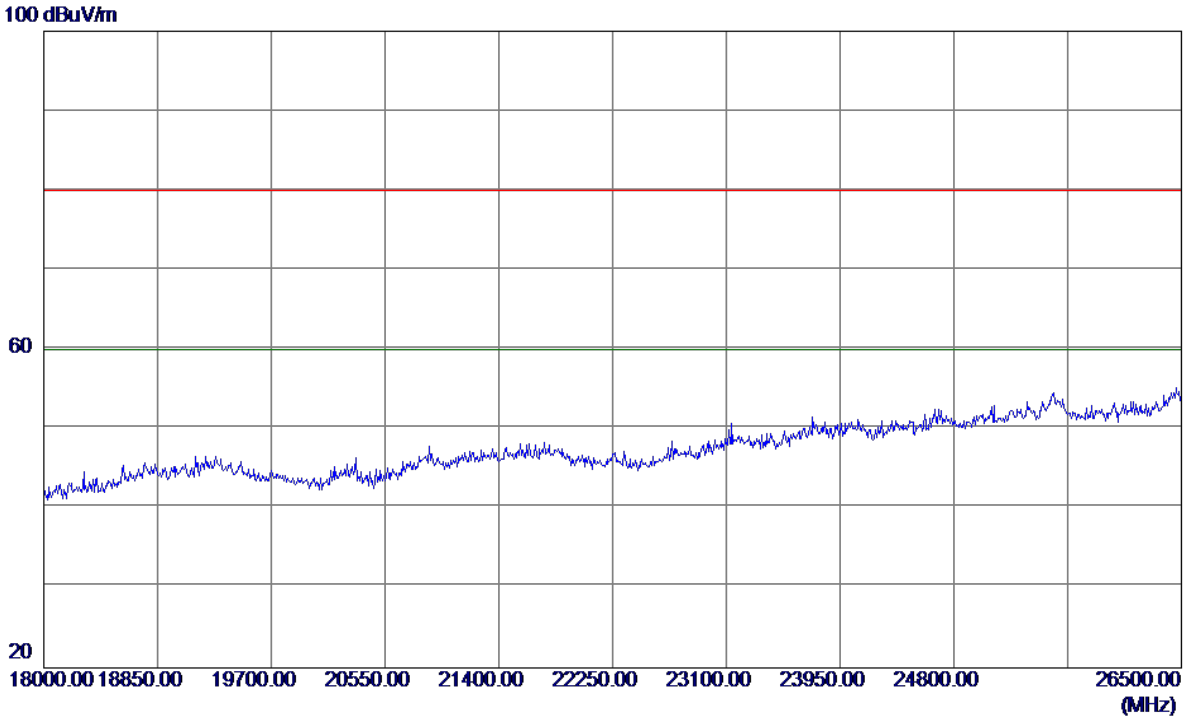


| No. | Freq. | Reading Level | Correct Factor | Measure ment | Limit | Margin | | |
|---|---|---|---|---|---|---|---|---|
| | MHz | dBuV/m | dB | dBuV/m | dBuV/m | dB | Detector | Comment |

| | |
|---|---|
| Orthogonal Axis : | X |
| Test Mode : | UNII-2A/ TX A Mode 5260MHz |


**Vertical**

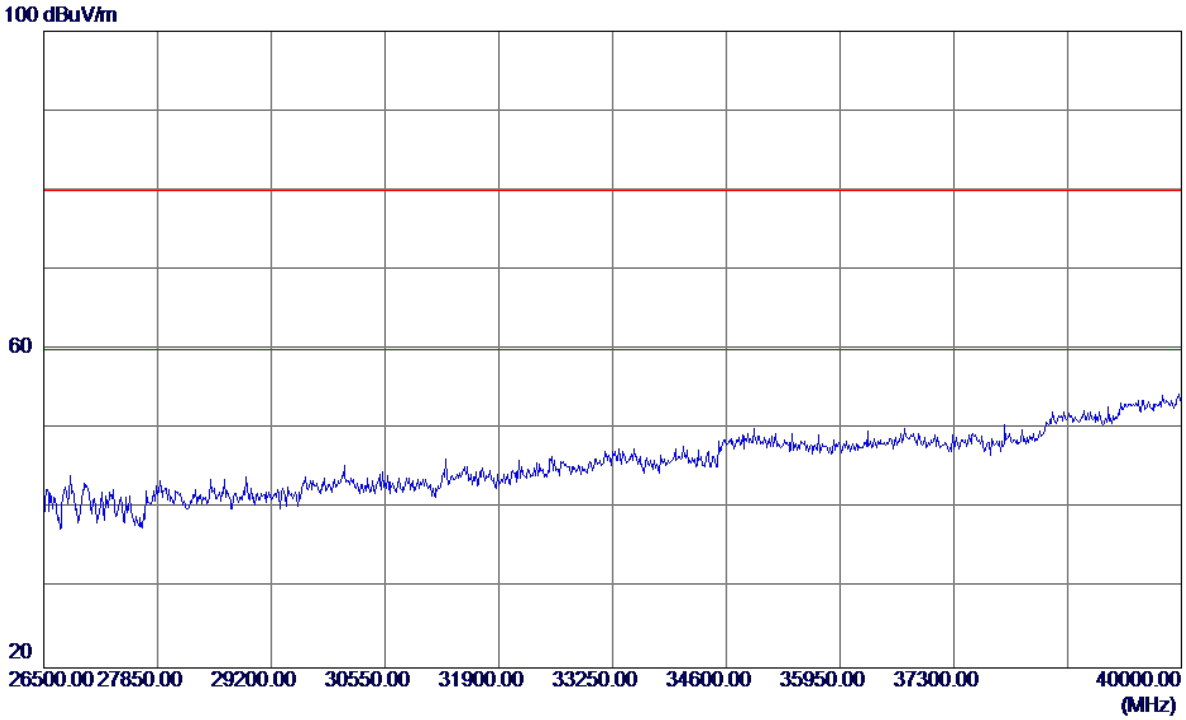


| No. | Freq. | Reading Level | Correct Factor | Measure ment | Limit | Margin | | |
|---|---|---|---|---|---|---|---|---|
| | MHz | dBuV/m | dB | dBuV/m | dBuV/m | dB | Detector | Comment |

| | |
|---|---|
| Orthogonal Axis : | X |
| Test Mode : | UNII-2A/ TX A Mode 5260MHz |


**Horizontal**

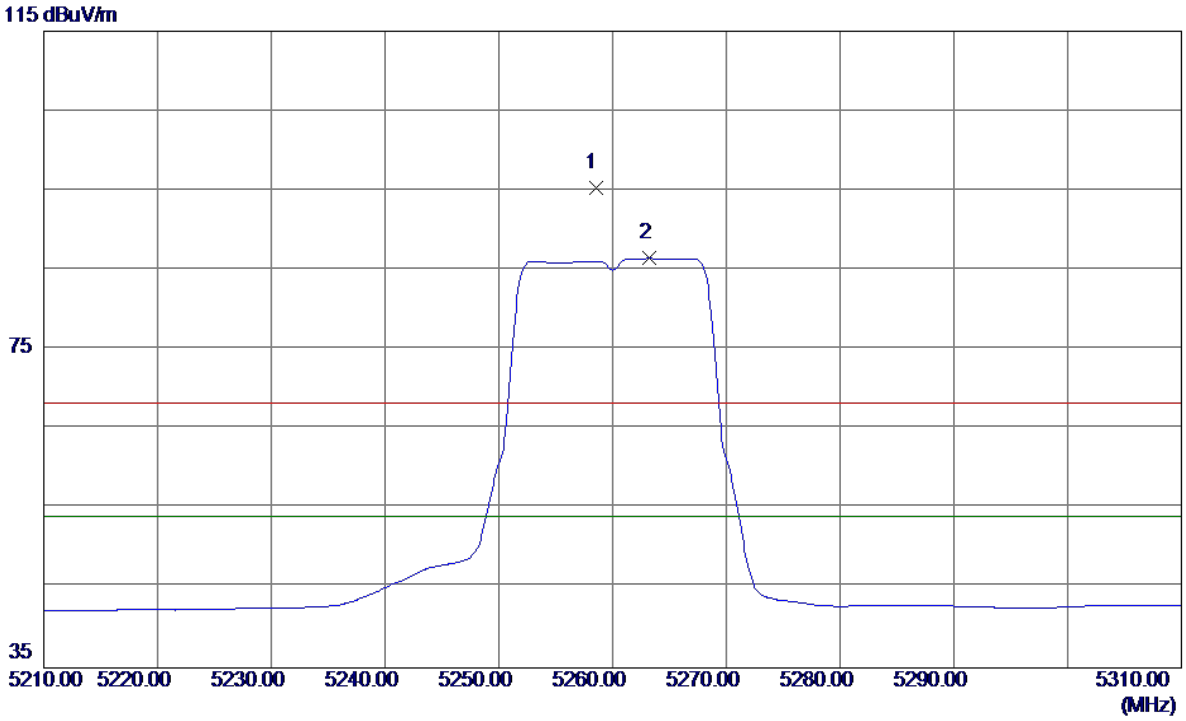


| No. | Freq. | Reading Level | Correct Factor | Measure ment | Limit | Margin | | |
|---|---|---|---|---|---|---|---|---|
| | MHz | dBuV/m | dB | dBuV/m | dBuV/m | dB | Detector | Comment |
| 1 | 5258.5000 | 53.67 | 41.65 | 95.32 | 68.30 | 27.02 | Peak | No Limit |
| 2 * | 5263.2000 | 44.77 | 41.68 | 86.45 | 54.00 | 32.45 | AVG | No Limit |

| | |
|---|---|
| Orthogonal Axis : | X |
| Test Mode : | UNII-2A/ TX A Mode 5260MHz |


**Horizontal**

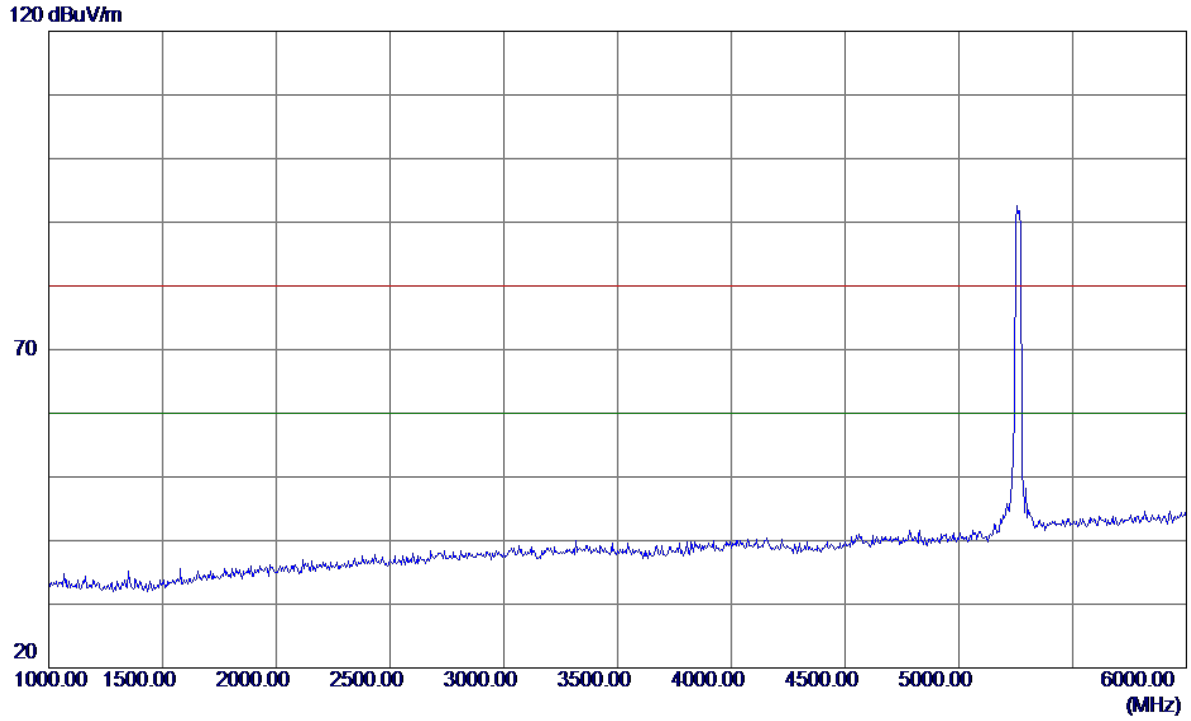


| No. | Freq. | Reading Level | Correct Factor | Measure ment | Limit | Margin | | |
|---|---|---|---|---|---|---|---|---|
| | MHz | dBuV/m | dB | dBuV/m | dBuV/m | dB | Detector | Comment |

| | |
|---|---|
| Orthogonal Axis : | X |
| Test Mode : | UNII-2A/ TX A Mode 5260MHz |


**Horizontal**

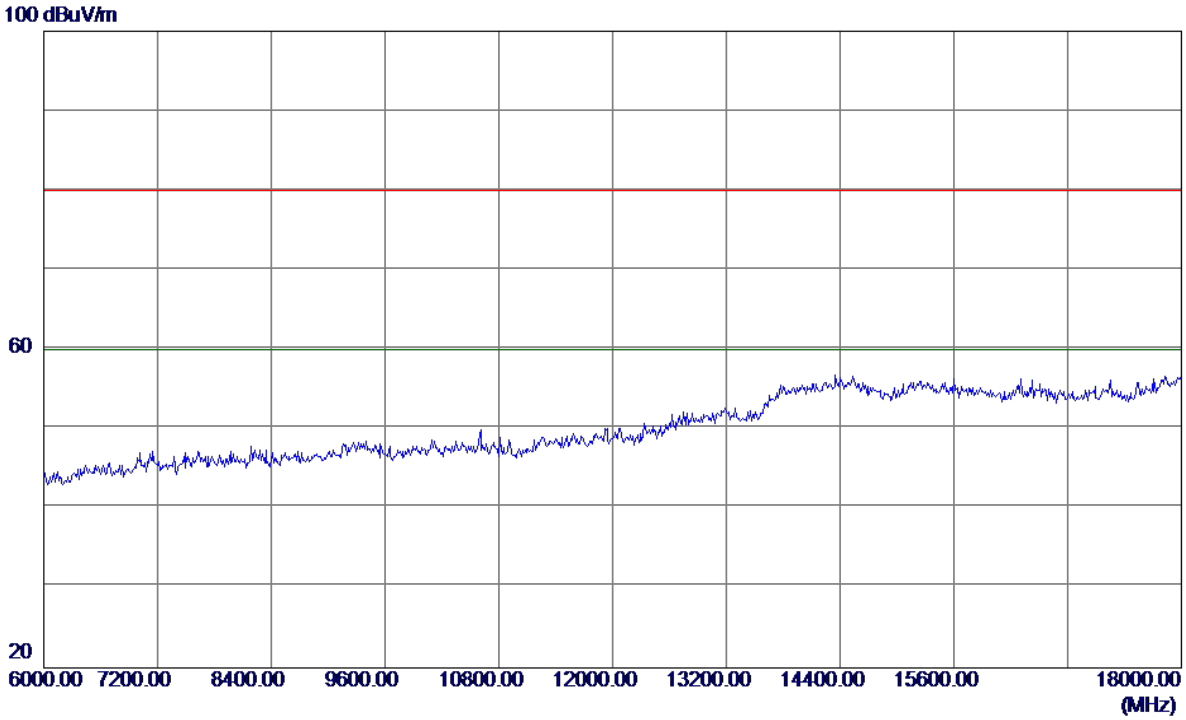


| No. | Freq. | Reading Level | Correct Factor | Measure ment | Limit | Margin | | |
|---|---|---|---|---|---|---|---|---|
| | MHz | dBuV/m | dB | dBuV/m | dBuV/m | dB | Detector | Comment |

| | |
|---|---|
| Orthogonal Axis : | X |
| Test Mode : | UNII-2A/ TX A Mode 5260MHz |


**Horizontal**

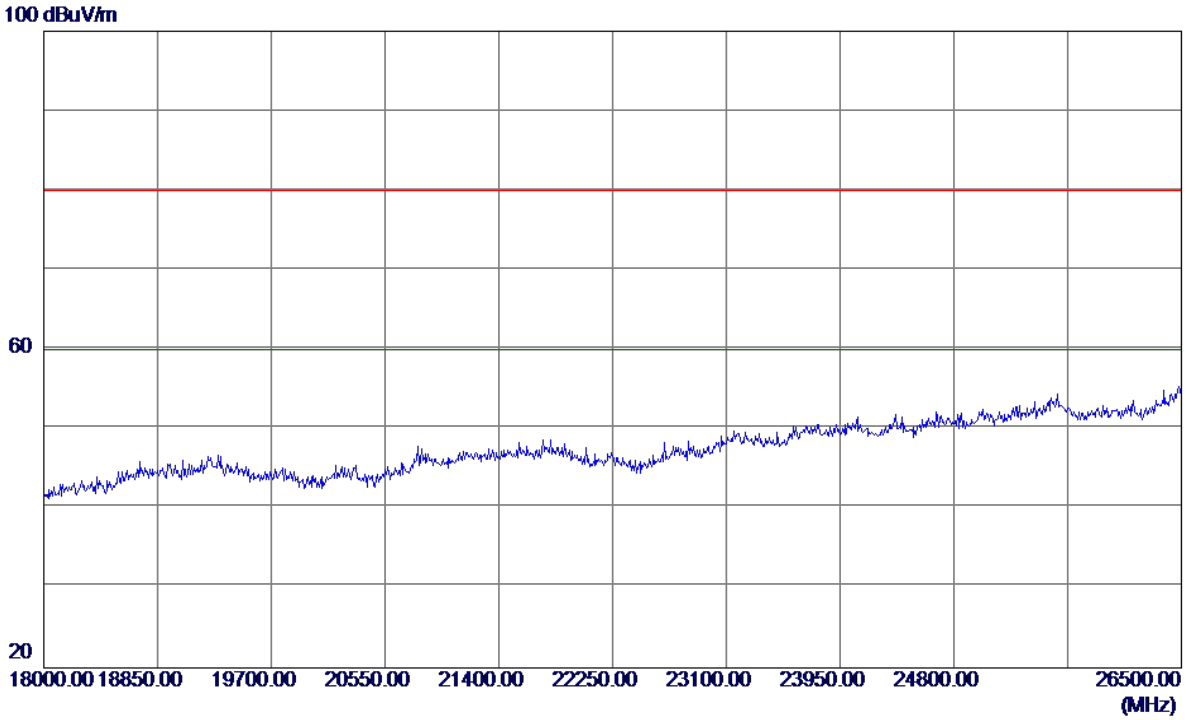


| No. | Freq. | Reading Level | Correct Factor | Measure ment | Limit | Margin | | |
|---|---|---|---|---|---|---|---|---|
| | MHz | dBuV/m | dB | dBuV/m | dBuV/m | dB | Detector | Comment |

| | |
|---|---|
| Orthogonal Axis : | X |
| Test Mode : | UNII-2A/ TX A Mode 5260MHz |


**Horizontal**

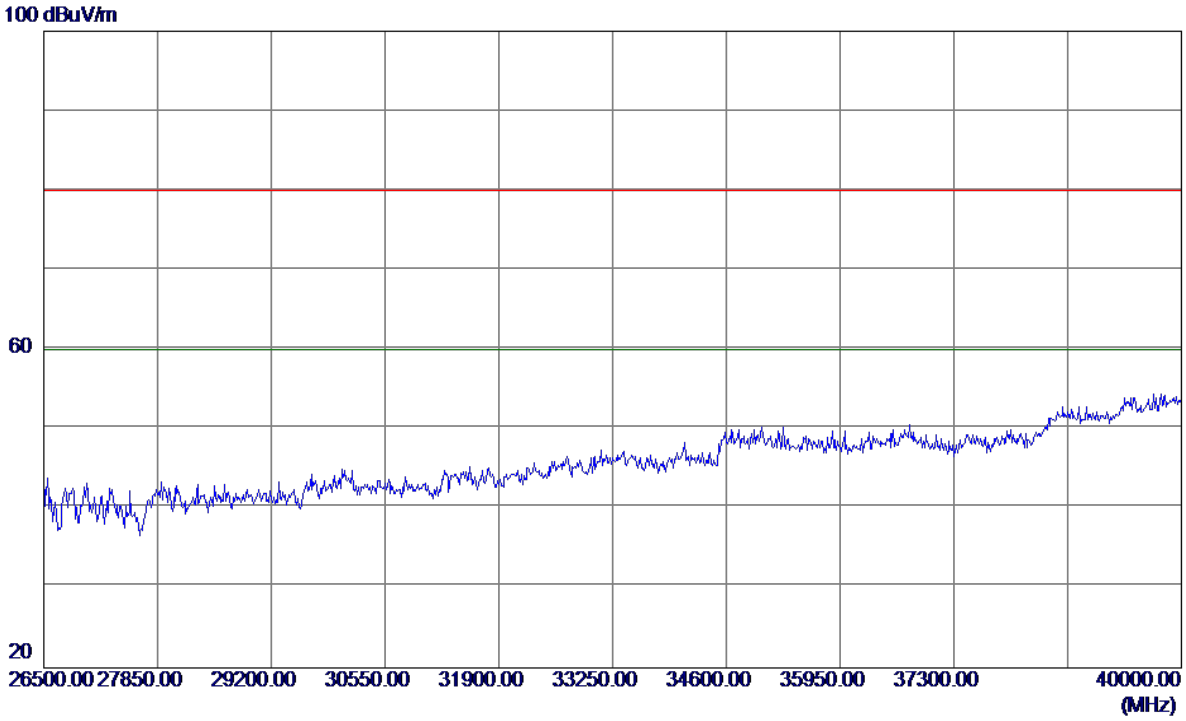


| No. | Freq. | Reading Level | Correct Factor | Measure ment | Limit | Margin | | |
|---|---|---|---|---|---|---|---|---|
| | MHz | dBuV/m | dB | dBuV/m | dBuV/m | dB | Detector | Comment |

| | |
|---|---|
| Orthogonal Axis : | X |
| Test Mode : | UNII-2A/ TX A Mode 5320MHz |


**Vertical**

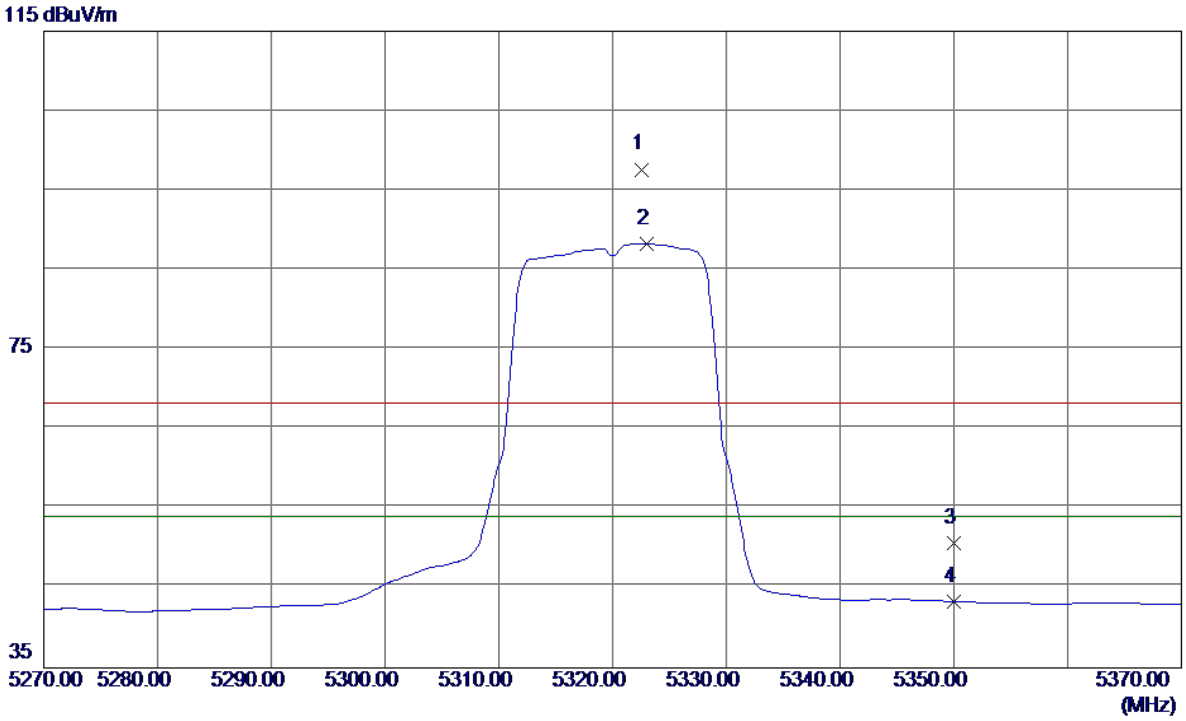


| No. | Freq. | Reading Level | Correct Factor | Measure ment | Limit | Margin | | |
|---|---|---|---|---|---|---|---|---|
| | MHz | dBuV/m | dB | dBuV/m | dBuV/m | dB | Detector | Comment |
| 1 | 5322.6000 | 55.66 | 41.98 | 97.64 | 68.30 | 29.34 | Peak | No Limit |
| 2 * | 5323.0000 | 46.29 | 41.98 | 88.27 | 54.00 | 34.27 | AVG | No Limit |
| 3 | 5350.0000 | 8.62 | 42.12 | 50.74 | 68.30 | -17.56 | Peak | |
| 4 | 5350.0000 | 1.22 | 42.12 | 43.34 | 54.00 | -10.66 | AVG | |

| | |
|---|---|
| Orthogonal Axis : | X |
| Test Mode : | UNII-2A/ TX A Mode 5320MHz |


**Vertical**

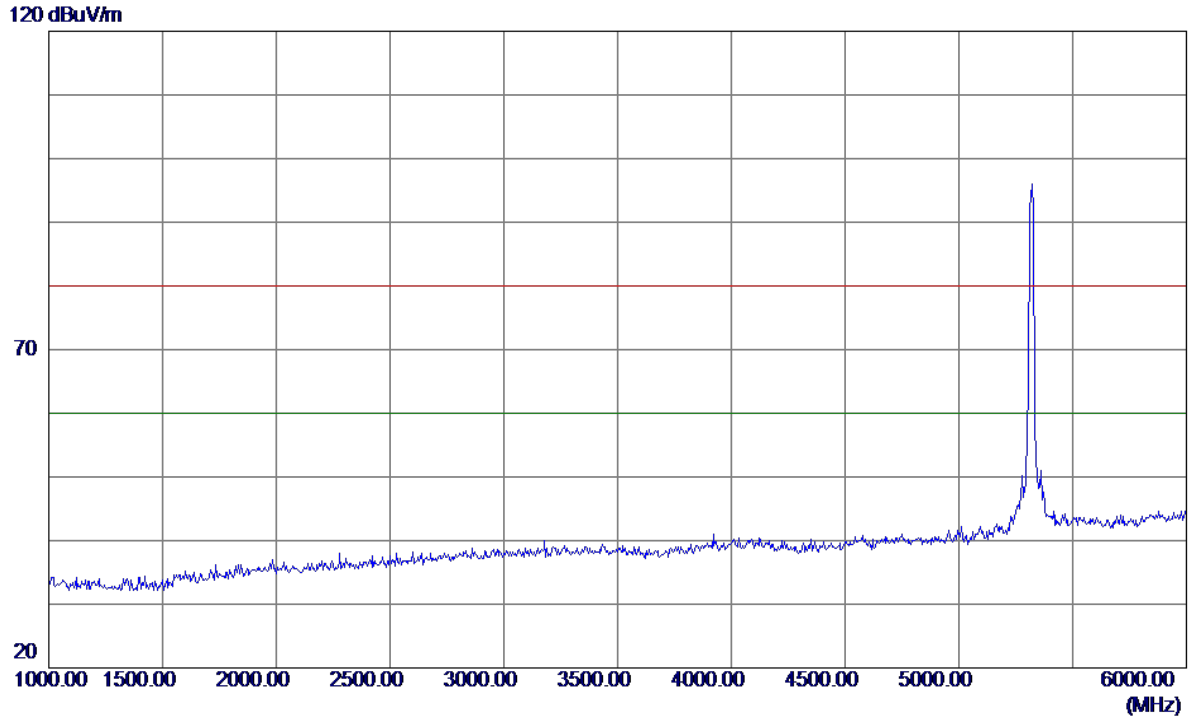


| No. | Freq. | Reading Level | Correct Factor | Measure ment | Limit | Margin | | |
|---|---|---|---|---|---|---|---|---|
| | MHz | dBuV/m | dB | dBuV/m | dBuV/m | dB | Detector | Comment |

| | |
|---|---|
| Orthogonal Axis : | X |
| Test Mode : | UNII-2A/ TX A Mode 5320MHz |


**Vertical**

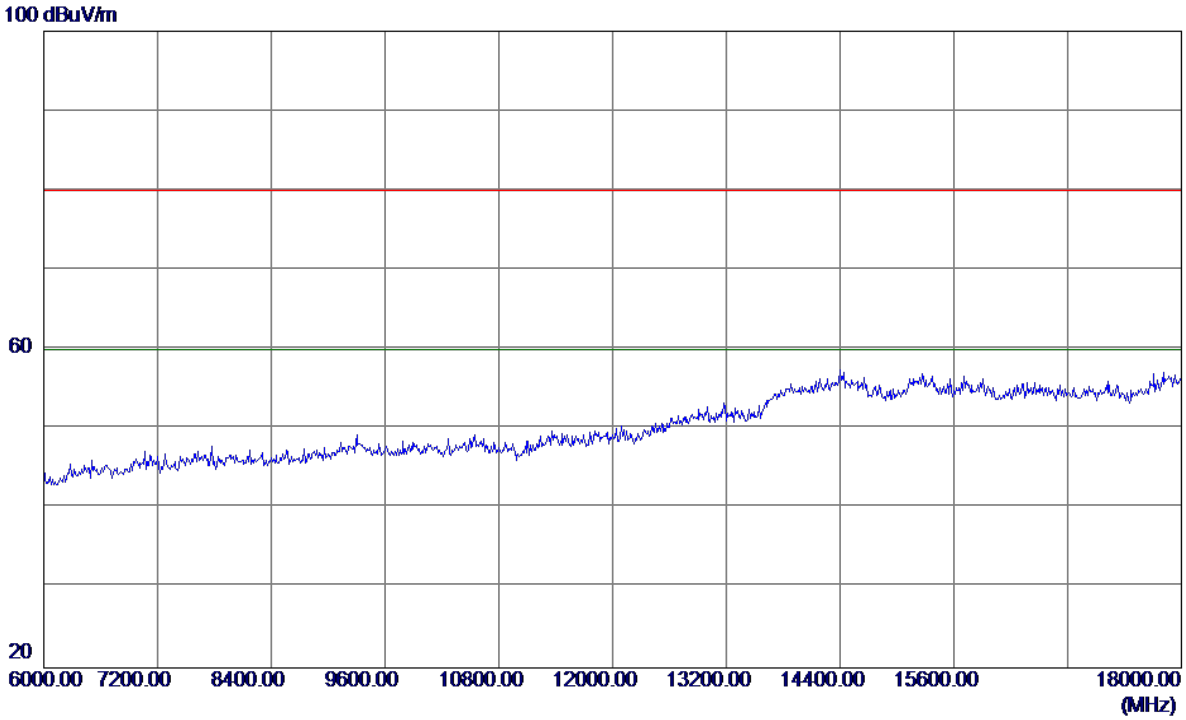


| No. | Freq. | Reading Level | Correct Factor | Measure ment | Limit | Margin | | |
|---|---|---|---|---|---|---|---|---|
| | MHz | dBuV/m | dB | dBuV/m | dBuV/m | dB | Detector | Comment |

| | |
|---|---|
| Orthogonal Axis : | X |
| Test Mode : | UNII-2A/ TX A Mode 5320MHz |


**Vertical**

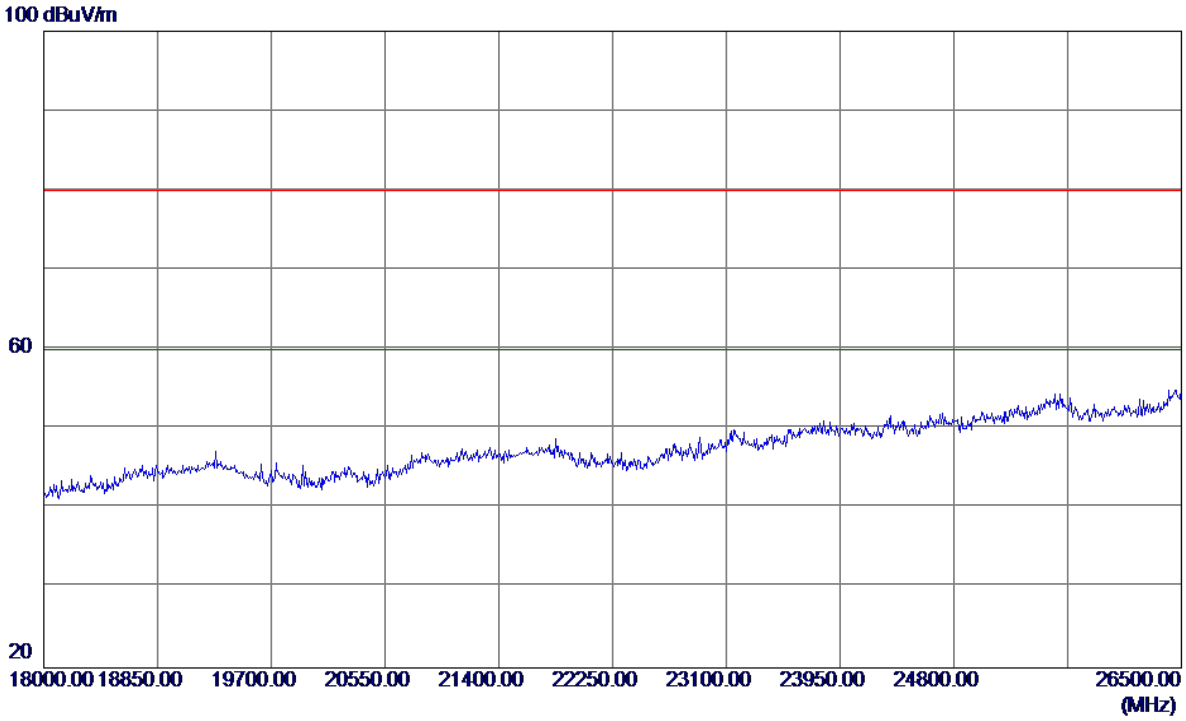


| No. | Freq. | Reading Level | Correct Factor | Measure ment | Limit | Margin | | |
|---|---|---|---|---|---|---|---|---|
| | MHz | dBuV/m | dB | dBuV/m | dBuV/m | dB | Detector | Comment |

| | |
|---|---|
| Orthogonal Axis : | X |
| Test Mode : | UNII-2A/ TX A Mode 5320MHz |


**Vertical**

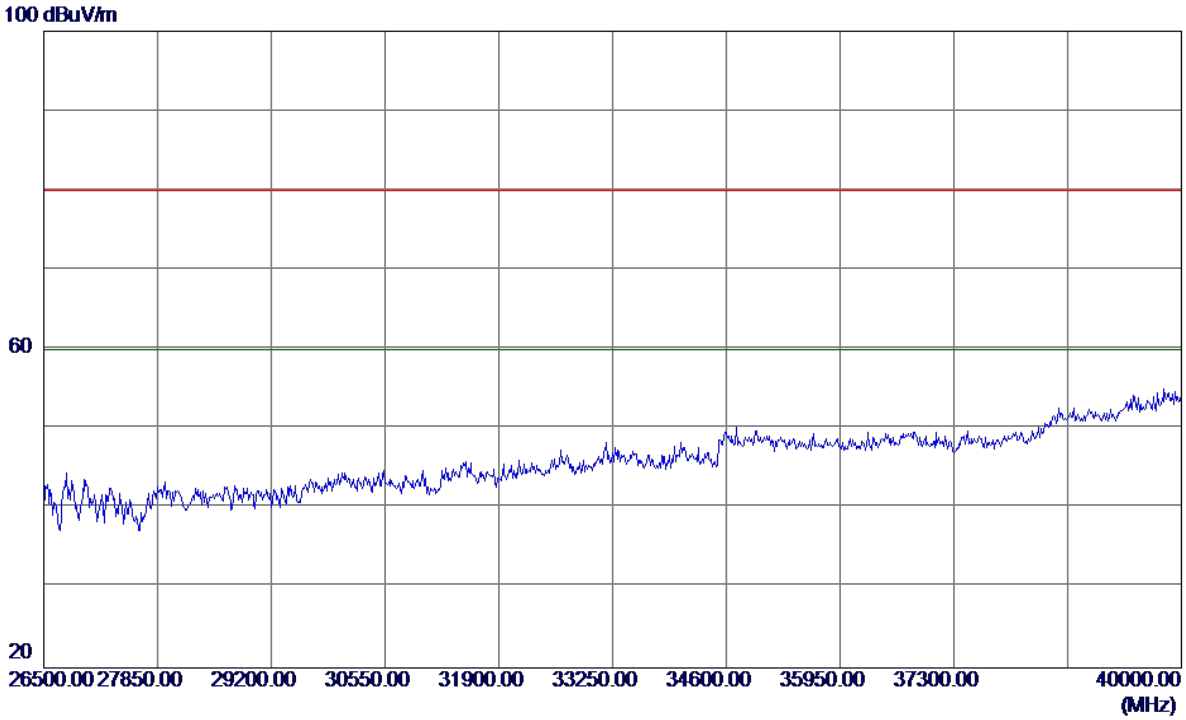


| No. | Freq. | Reading Level | Correct Factor | Measure ment | Limit | Margin | | |
|---|---|---|---|---|---|---|---|---|
| | MHz | dBuV/m | dB | dBuV/m | dBuV/m | dB | Detector | Comment |

| | |
|---|---|
| Orthogonal Axis : | X |
| Test Mode : | UNII-2A/ TX A Mode 5320MHz |


**Horizontal**

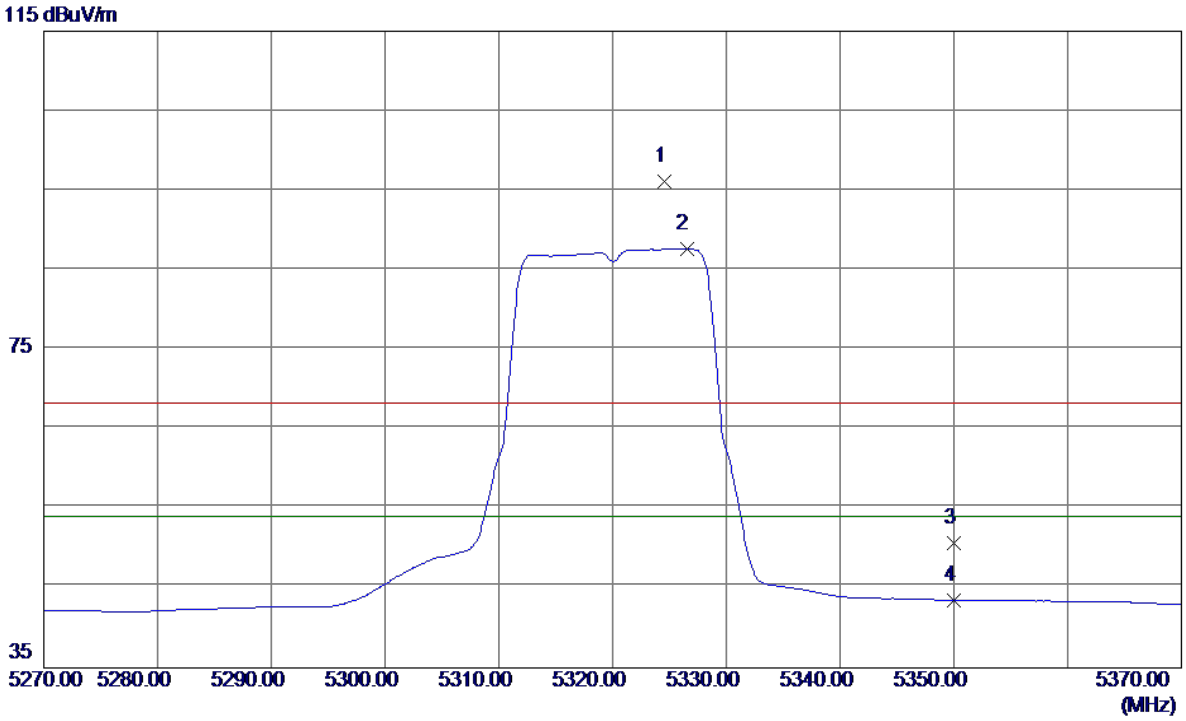


| No. | Freq. | Reading Level | Correct Factor | Measure ment | Limit | Margin | | |
|---|---|---|---|---|---|---|---|---|
| | MHz | dBuV/m | dB | dBuV/m | dBuV/m | dB | Detector | Comment |
| 1 | 5324.6000 | 54.18 | 41.99 | 96.17 | 68.30 | 27.87 | Peak | No Limit |
| 2 * | 5326.5000 | 45.65 | 42.00 | 87.65 | 54.00 | 33.65 | AVG | No Limit |
| 3 | 5350.0000 | 8.53 | 42.12 | 50.65 | 68.30 | -17.65 | Peak | |
| 4 | 5350.0000 | 1.33 | 42.12 | 43.45 | 54.00 | -10.55 | AVG | |

| | |
|---|---|
| Orthogonal Axis : | X |
| Test Mode : | UNII-2A/ TX A Mode 5320MHz |


**Horizontal**

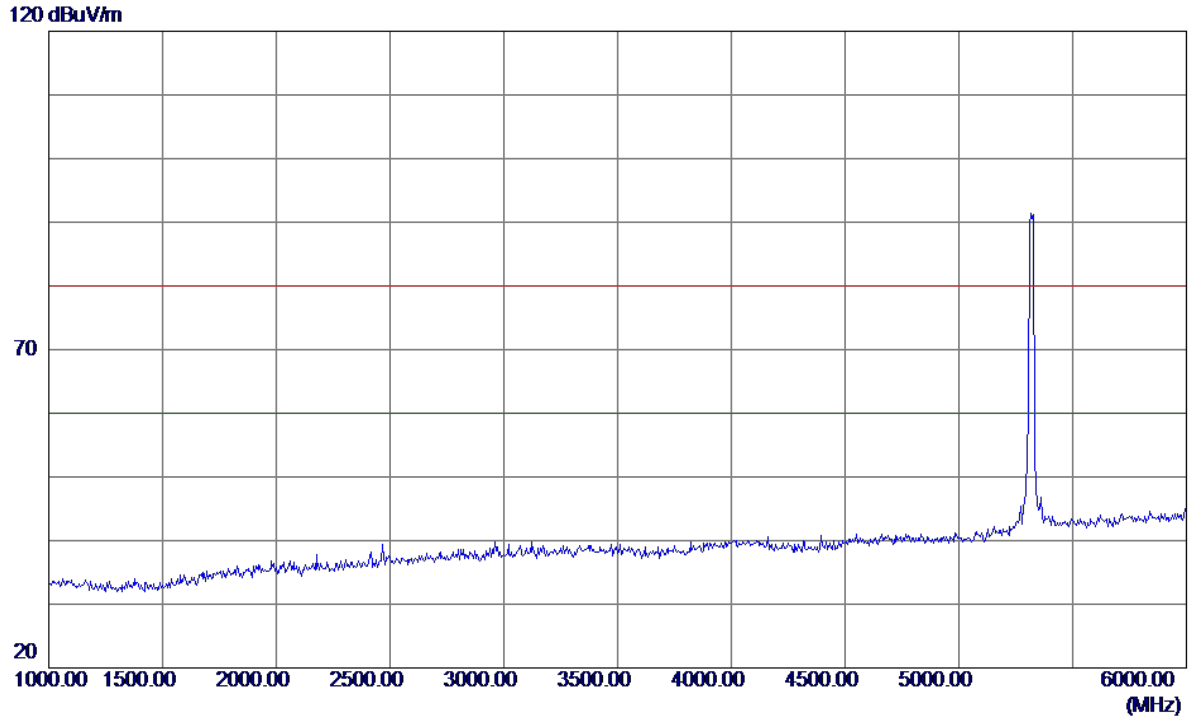


| No. | Freq. | Reading Level | Correct Factor | Measure ment | Limit | Margin | | |
|---|---|---|---|---|---|---|---|---|
| | MHz | dBuV/m | dB | dBuV/m | dBuV/m | dB | Detector | Comment |

| | |
|---|---|
| Orthogonal Axis : | X |
| Test Mode : | UNII-2A/ TX A Mode 5320MHz |


**Horizontal**

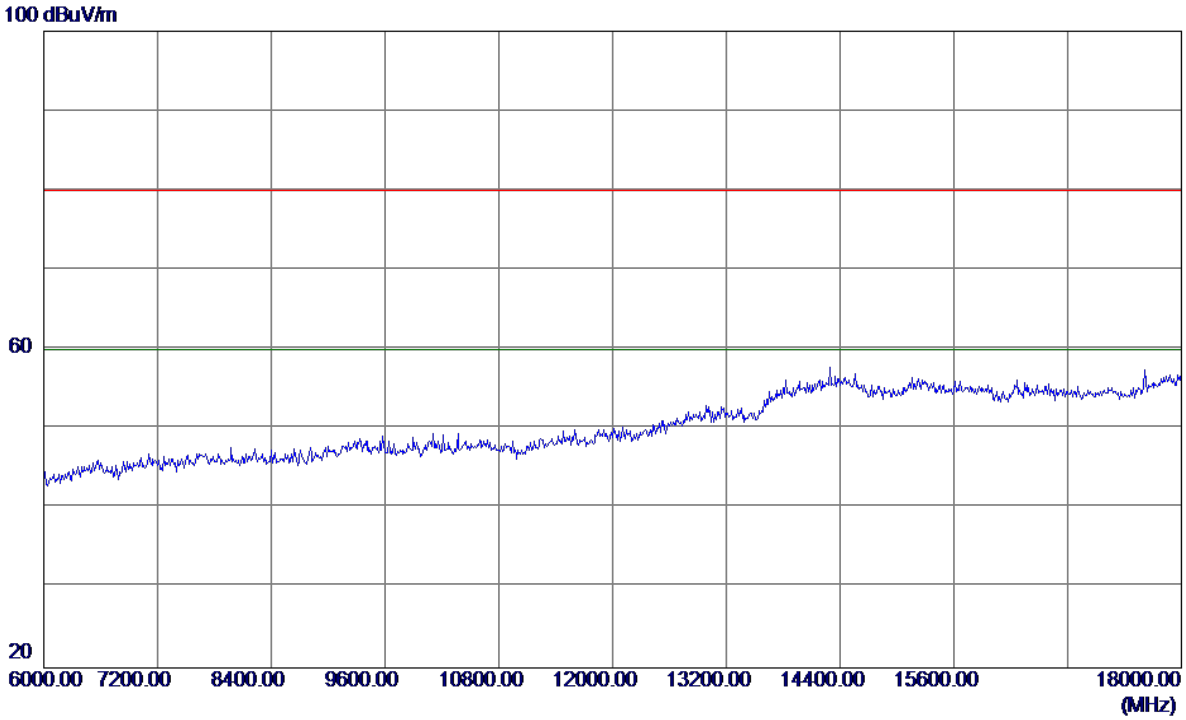


| No. | Freq. | Reading Level | Correct Factor | Measure ment | Limit | Margin | | |
|---|---|---|---|---|---|---|---|---|
| | MHz | dBuV/m | dB | dBuV/m | dBuV/m | dB | Detector | Comment |

| | |
|---|---|
| Orthogonal Axis : | X |
| Test Mode : | UNII-2A/ TX A Mode 5320MHz |


**Horizontal**

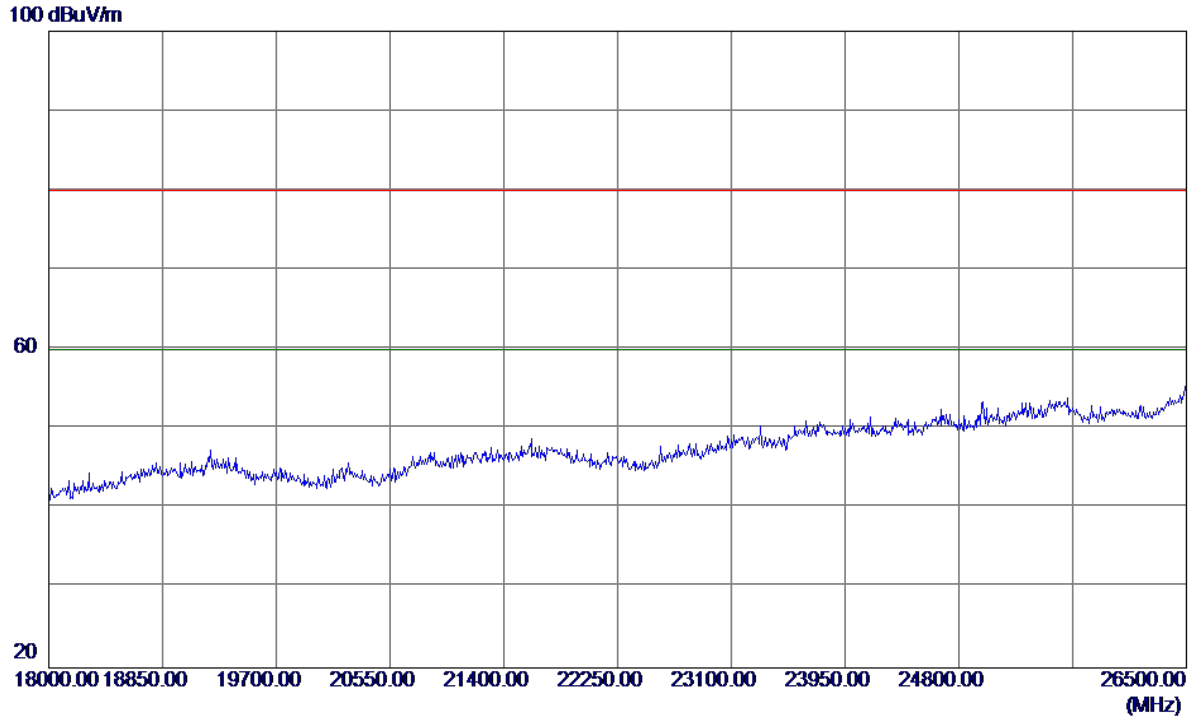


| No. | Freq. | Reading Level | Correct Factor | Measure ment | Limit | Margin | | |
|---|---|---|---|---|---|---|---|---|
| | MHz | dBuV/m | dB | dBuV/m | dBuV/m | dB | Detector | Comment |

| | |
|---|---|
| Orthogonal Axis : | X |
| Test Mode : | UNII-2A/ TX A Mode 5320MHz |


**Horizontal**

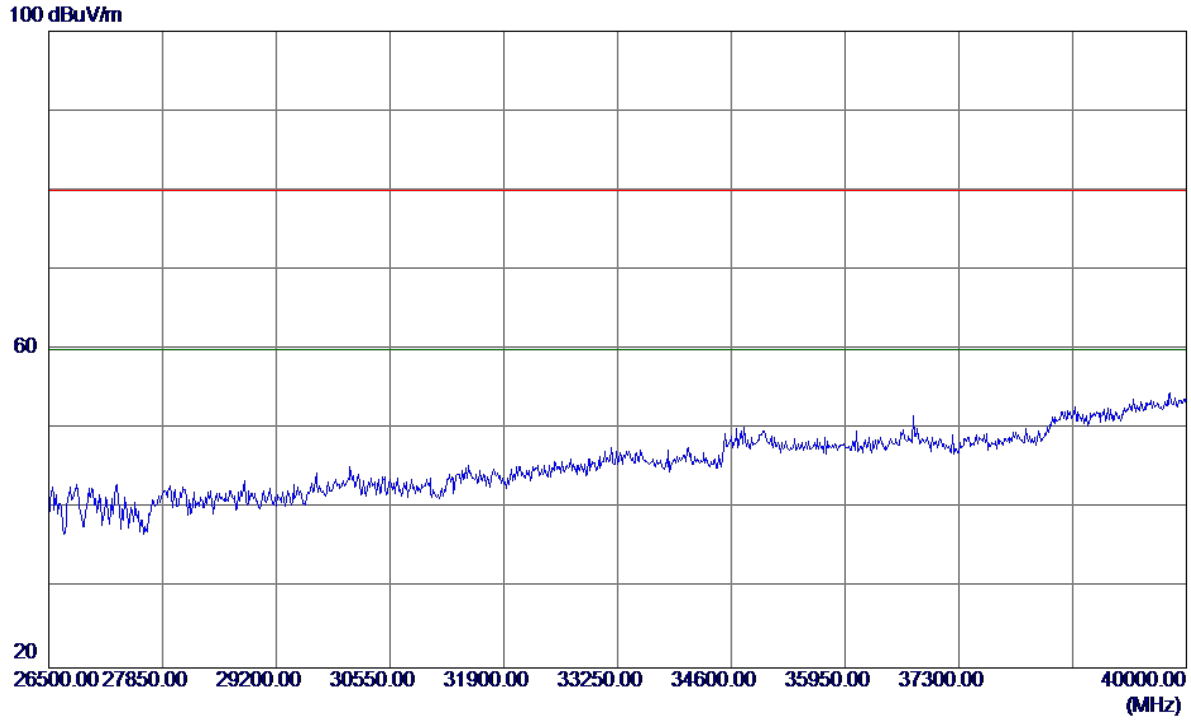


| No. | Freq. | Reading Level | Correct Factor | Measure ment | Limit | Margin | | |
|---|---|---|---|---|---|---|---|---|
| | MHz | dBuV/m | dB | dBuV/m | dBuV/m | dB | Detector | Comment |

| | |
|---|---|
| Orthogonal Axis : | X |
| Test Mode : | UNII-2A/ TX N20 Mode 5260MHz |


**Vertical**

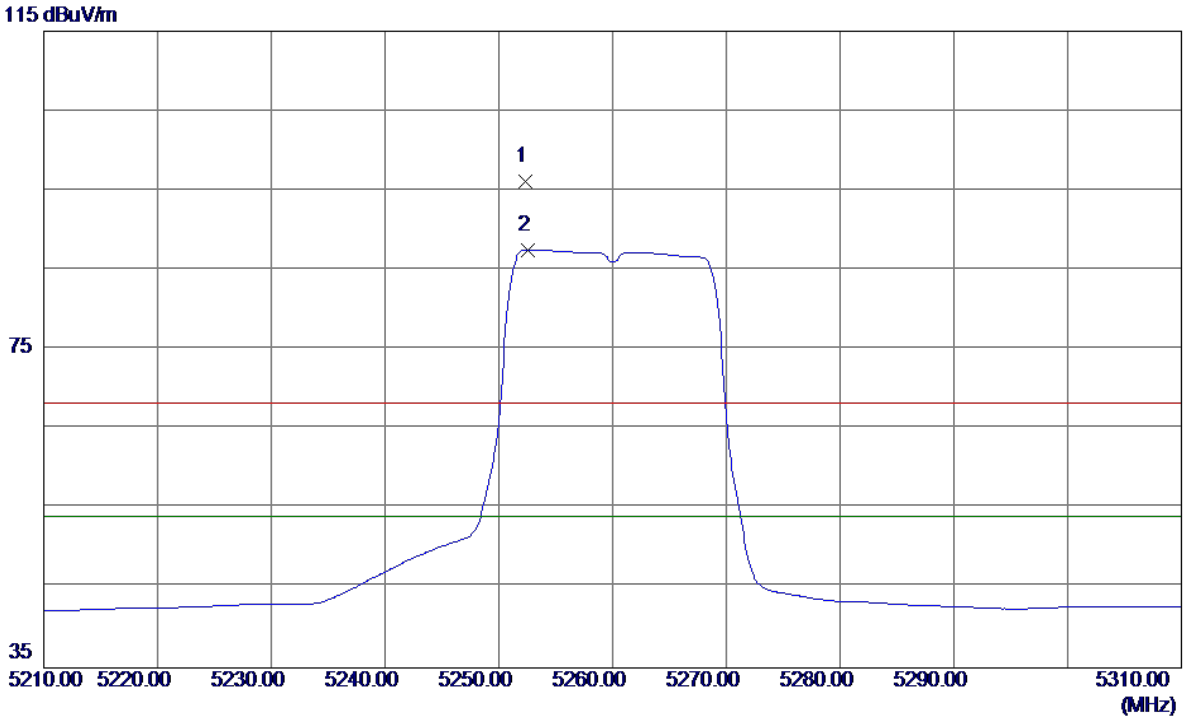


| No. | Freq. | Reading Level | Correct Factor | Measure ment | Limit | Margin | | |
|---|---|---|---|---|---|---|---|---|
| | MHz | dBuV/m | dB | dBuV/m | dBuV/m | dB | Detector | Comment |
| 1 | 5252.3000 | 54.50 | 41.62 | 96.12 | 68.30 | 27.82 | Peak | No Limit |
| 2 * | 5252.6000 | 45.91 | 41.62 | 87.53 | 54.00 | 33.53 | AVG | No Limit |

| | |
|---|---|
| Orthogonal Axis : | X |
| Test Mode : | UNII-2A/ TX N20 Mode 5260MHz |


**Vertical**

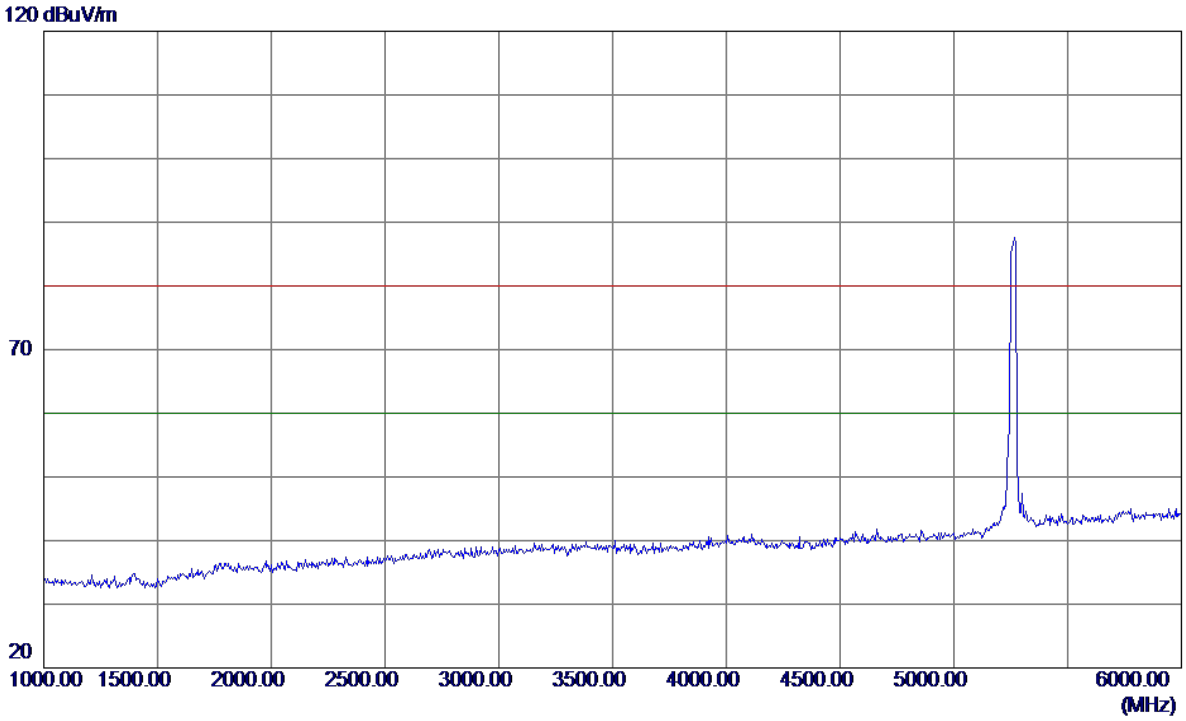


| No. | Freq. | Reading Level | Correct Factor | Measure ment | Limit | Margin | | |
|---|---|---|---|---|---|---|---|---|
| | MHz | dBuV/m | dB | dBuV/m | dBuV/m | dB | Detector | Comment |

| | |
|---|---|
| Orthogonal Axis : | X |
| Test Mode : | UNII-2A/ TX N20 Mode 5260MHz |


**Vertical**

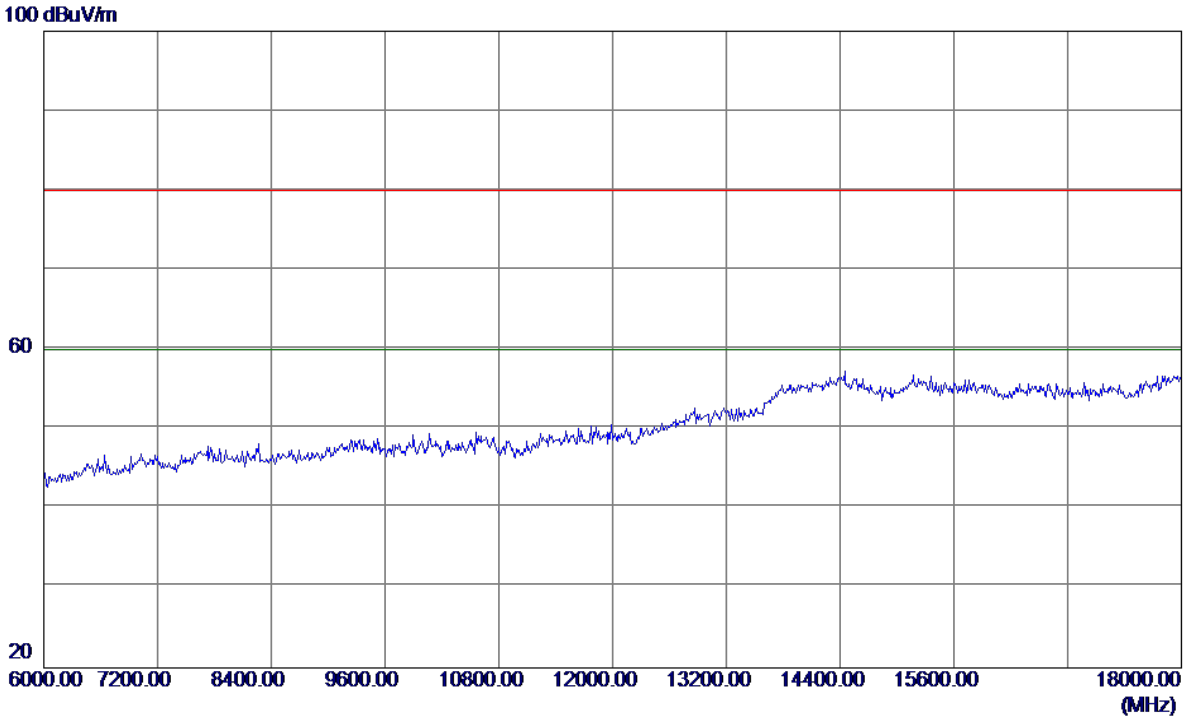


| No. | Freq. | Reading Level | Correct Factor | Measure ment | Limit | Margin | | |
|---|---|---|---|---|---|---|---|---|
| | MHz | dBuV/m | dB | dBuV/m | dBuV/m | dB | Detector | Comment |

| | |
|---|---|
| Orthogonal Axis : | X |
| Test Mode : | UNII-2A/ TX N20 Mode 5260MHz |


**Vertical**

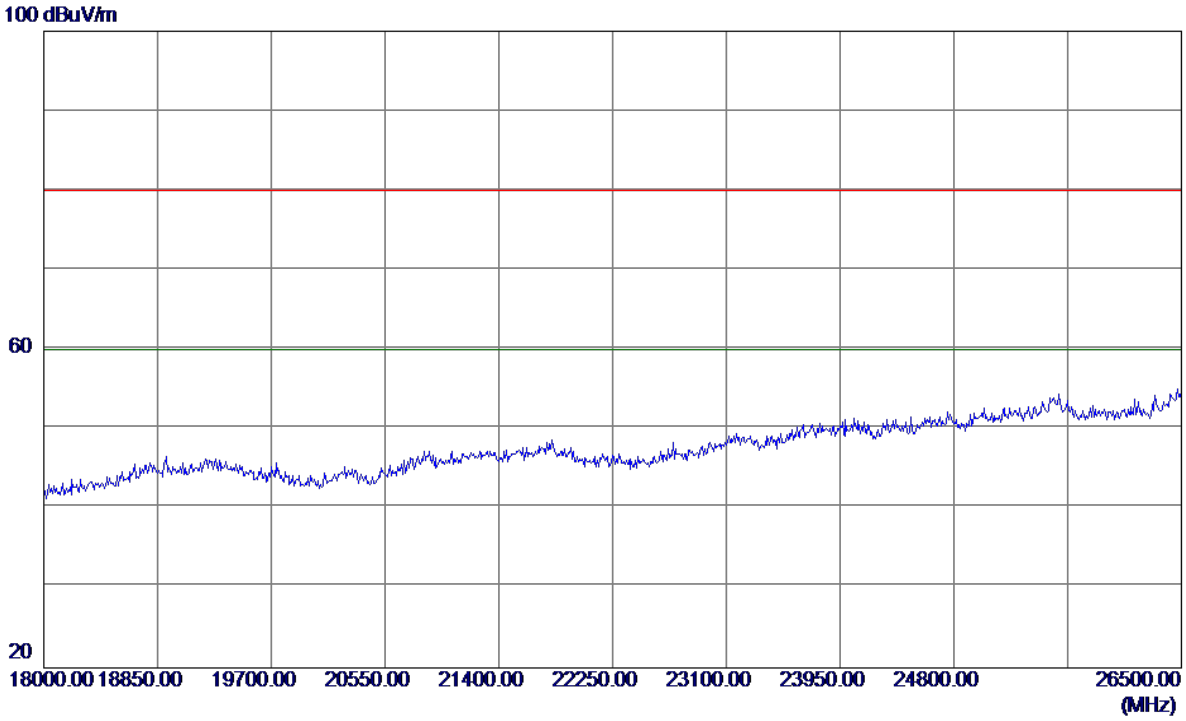


| No. | Freq. | Reading Level | Correct Factor | Measure ment | Limit | Margin | | |
|---|---|---|---|---|---|---|---|---|
| | MHz | dBuV/m | dB | dBuV/m | dBuV/m | dB | Detector | Comment |

| | |
|---|---|
| Orthogonal Axis : | X |
| Test Mode : | UNII-2A/ TX N20 Mode 5260MHz |


**Vertical**

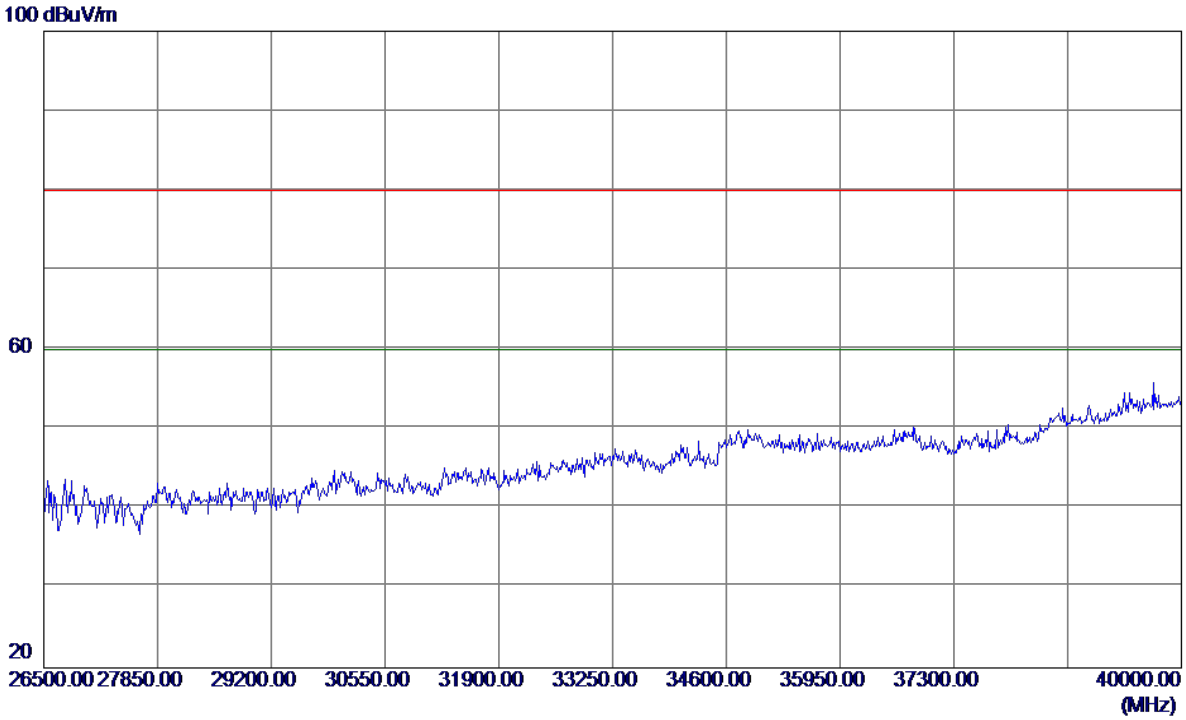


| No. | Freq. | Reading Level | Correct Factor | Measure ment | Limit | Margin | | |
|---|---|---|---|---|---|---|---|---|
| | MHz | dBuV/m | dB | dBuV/m | dBuV/m | dB | Detector | Comment |

| | |
|---|---|
| Orthogonal Axis : | X |
| Test Mode : | UNII-2A/ TX N20 Mode 5260MHz |


**Horizontal**

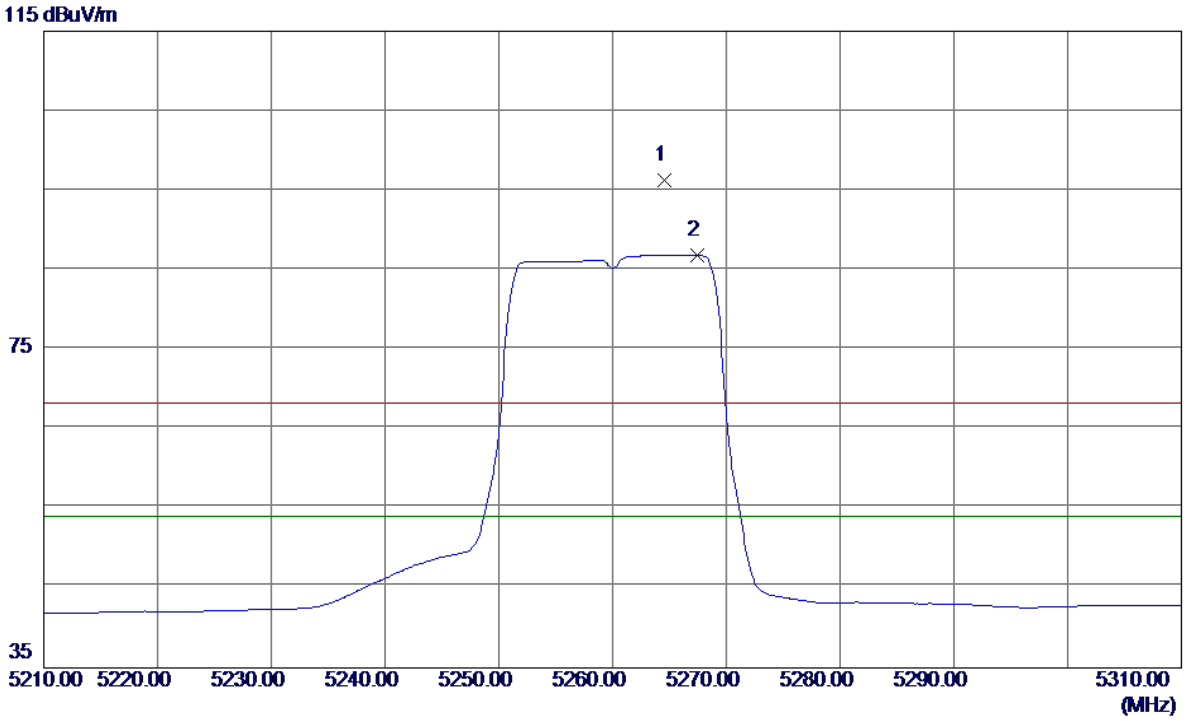


| No. | Freq. | Reading Level | Correct Factor | Measure ment | Limit | Margin | | |
|---|---|---|---|---|---|---|---|---|
| | MHz | dBuV/m | dB | dBuV/m | dBuV/m | dB | Detector | Comment |
| 1 | 5264.6000 | 54.53 | 41.68 | 96.21 | 68.30 | 27.91 | Peak | No Limit |
| 2 * | 5267.4000 | 45.15 | 41.70 | 86.85 | 54.00 | 32.85 | AVG | No Limit |

| | |
|---|---|
| Orthogonal Axis : | X |
| Test Mode : | UNII-2A/ TX N20 Mode 5260MHz |


**Horizontal**

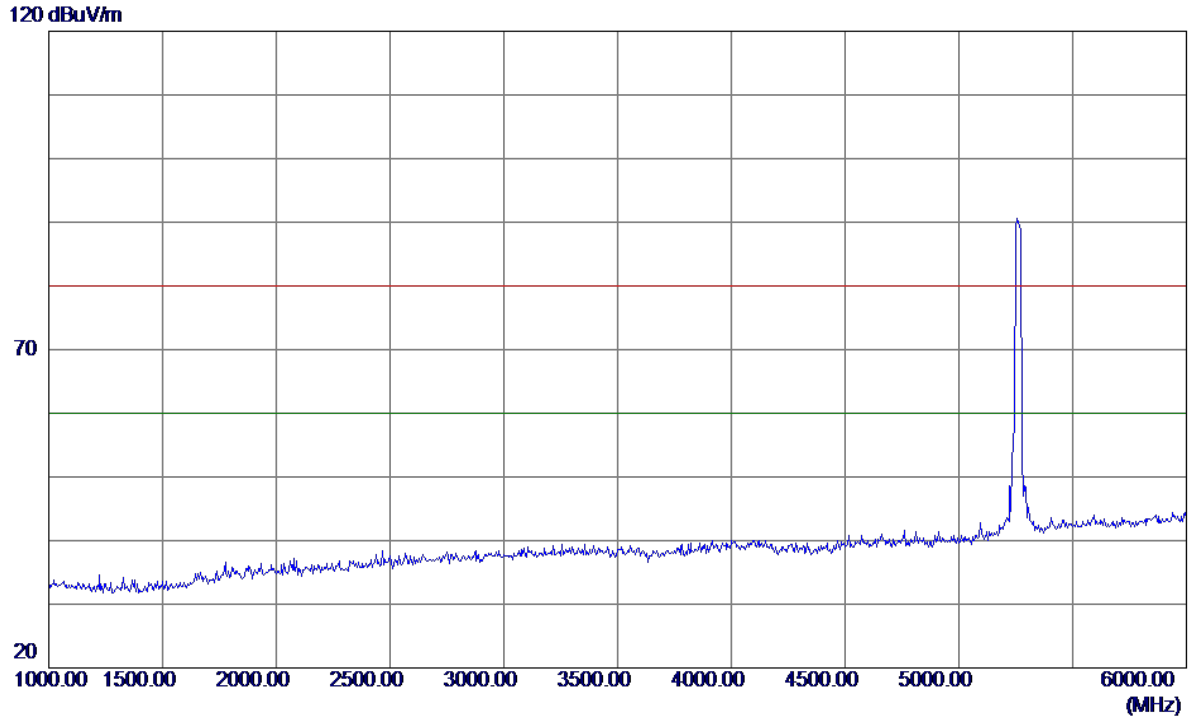


| No. | Freq. | Reading Level | Correct Factor | Measure ment | Limit | Margin | | |
|---|---|---|---|---|---|---|---|---|
| | MHz | dBuV/m | dB | dBuV/m | dBuV/m | dB | Detector | Comment |

| | |
|---|---|
| Orthogonal Axis : | X |
| Test Mode : | UNII-2A/ TX N20 Mode 5260MHz |


**Horizontal**

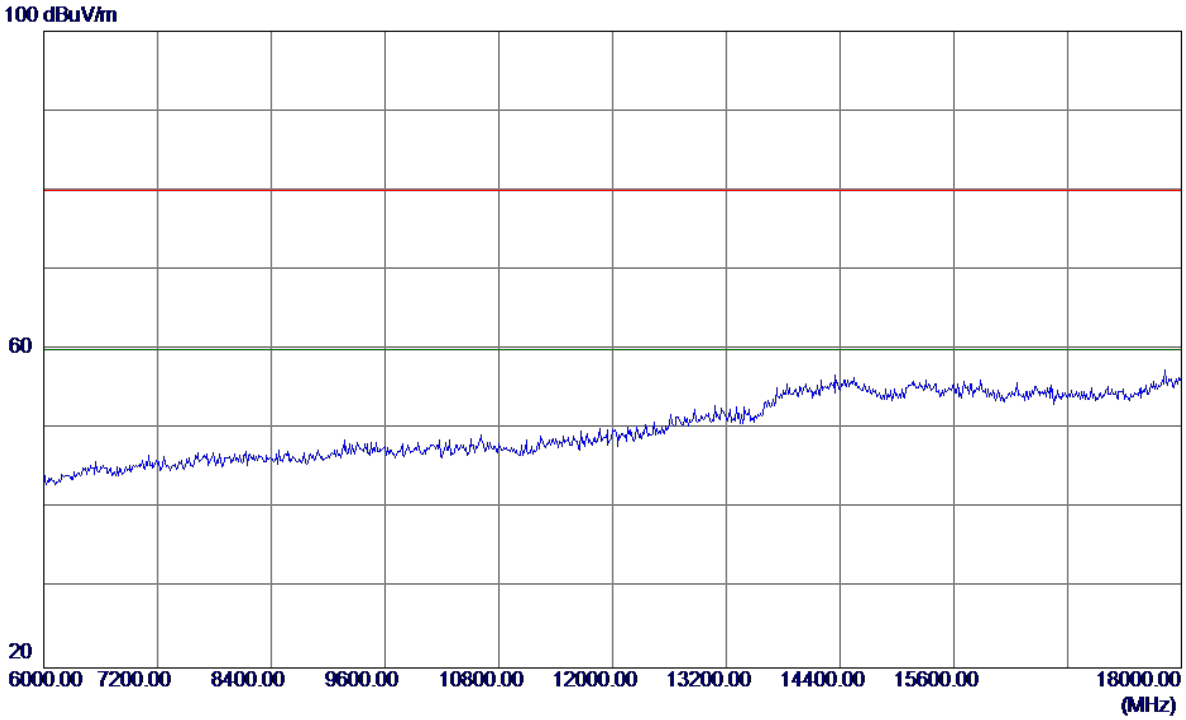


| No. | Freq. | Reading Level | Correct Factor | Measure ment | Limit | Margin | | |
|---|---|---|---|---|---|---|---|---|
| | MHz | dBuV/m | dB | dBuV/m | dBuV/m | dB | Detector | Comment |

| | |
|---|---|
| Orthogonal Axis : | X |
| Test Mode : | UNII-2A/ TX N20 Mode 5260MHz |


**Horizontal**

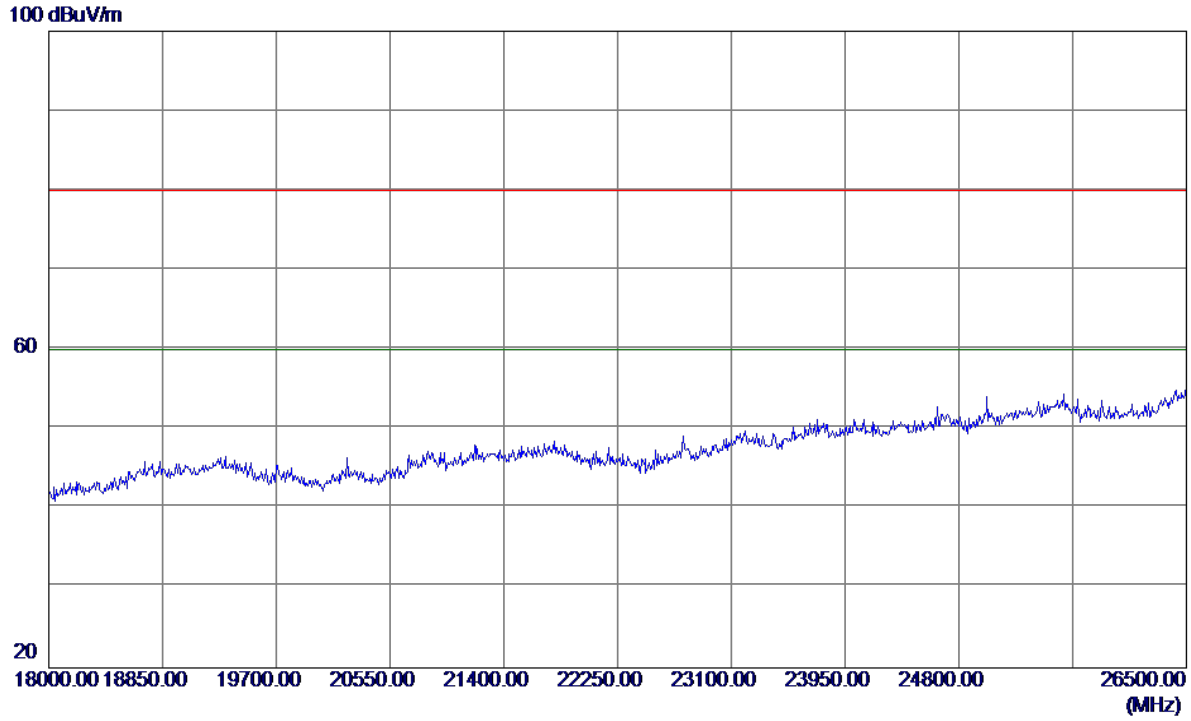


| No. | Freq. | Reading Level | Correct Factor | Measure ment | Limit | Margin | | |
|---|---|---|---|---|---|---|---|---|
| | MHz | dBuV/m | dB | dBuV/m | dBuV/m | dB | Detector | Comment |

| | |
|---|---|
| Orthogonal Axis : | X |
| Test Mode : | UNII-2A/ TX N20 Mode 5260MHz |


**Horizontal**

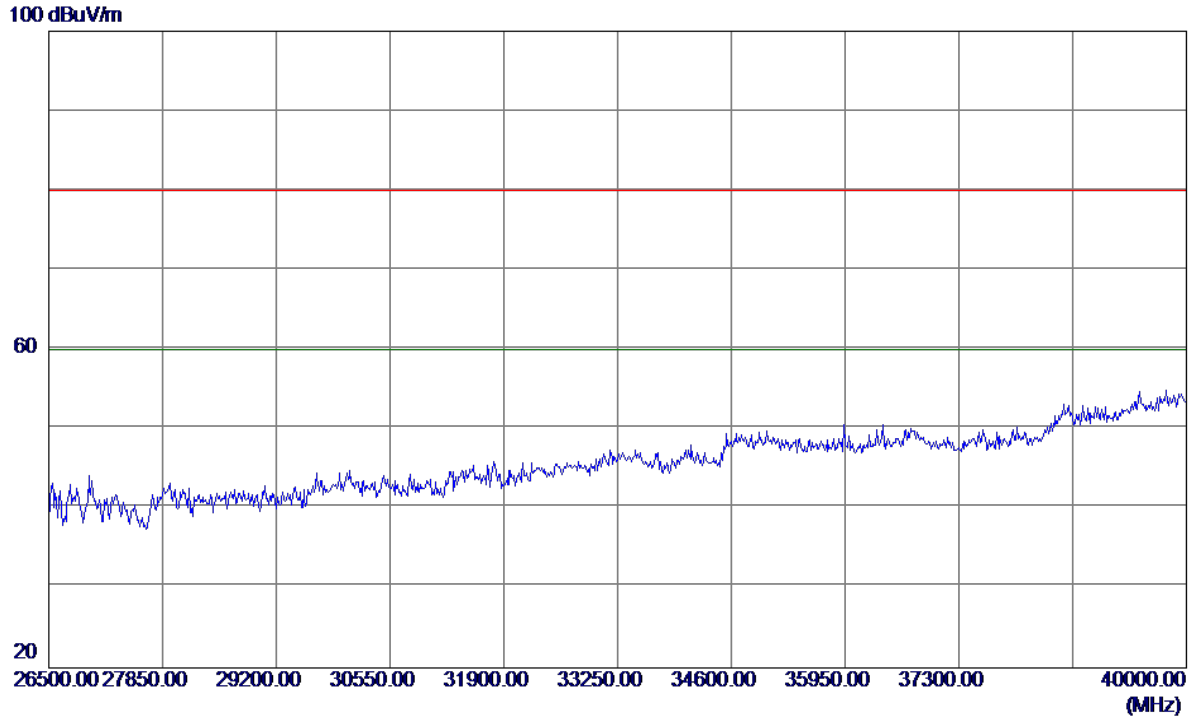


| No. | Freq. | Reading Level | Correct Factor | Measure ment | Limit | Margin | | |
|---|---|---|---|---|---|---|---|---|
| | MHz | dBuV/m | dB | dBuV/m | dBuV/m | dB | Detector | Comment |

| | |
|---|---|
| Orthogonal Axis : | X |
| Test Mode : | UNII-2A/ TX N20 Mode 5320MHz |


**Vertical**

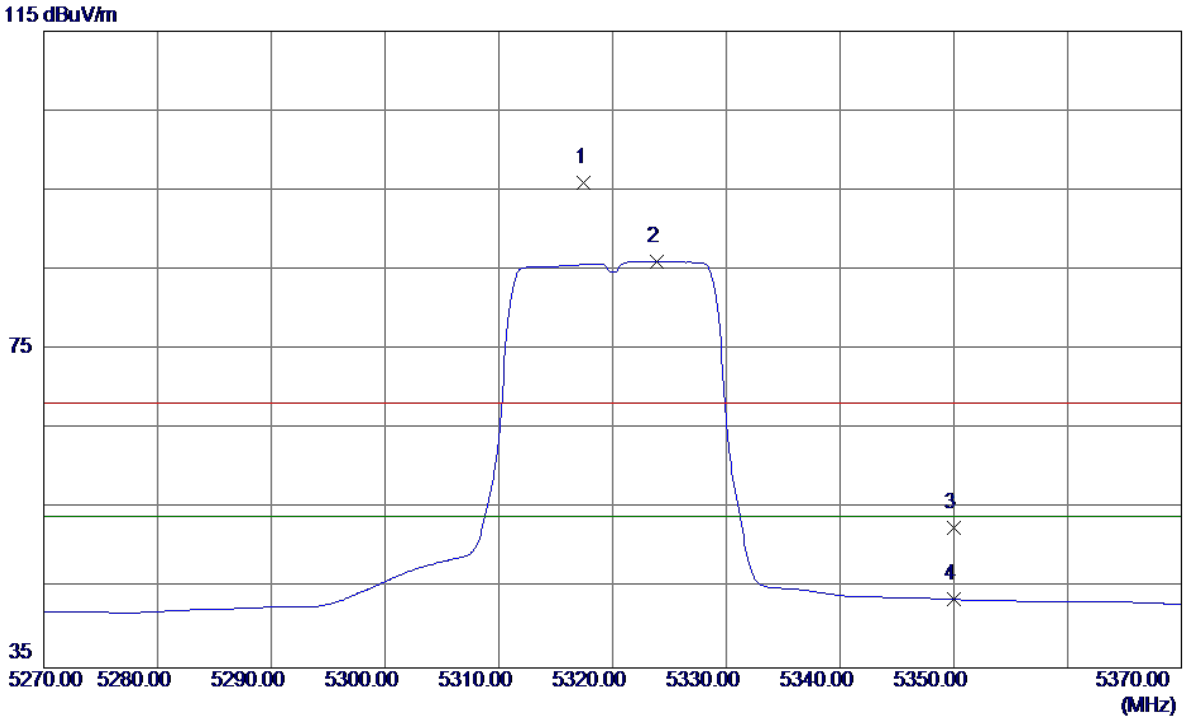


| No. | Freq. | Reading Level | Correct Factor | Measure ment | Limit | Margin | | |
|---|---|---|---|---|---|---|---|---|
| | MHz | dBuV/m | dB | dBuV/m | dBuV/m | dB | Detector | Comment |
| 1 | 5317.5000 | 53.95 | 41.95 | 95.90 | 68.30 | 27.60 | Peak | No Limit |
| 2 * | 5323.9000 | 44.06 | 41.99 | 86.05 | 54.00 | 32.05 | AVG | No Limit |
| 3 | 5350.0000 | 10.53 | 42.12 | 52.65 | 68.30 | -15.65 | Peak | |
| 4 | 5350.0000 | 1.49 | 42.12 | 43.61 | 54.00 | -10.39 | AVG | |

| | |
|---|---|
| Orthogonal Axis : | X |
| Test Mode : | UNII-2A/ TX N20 Mode 5320MHz |


**Vertical**

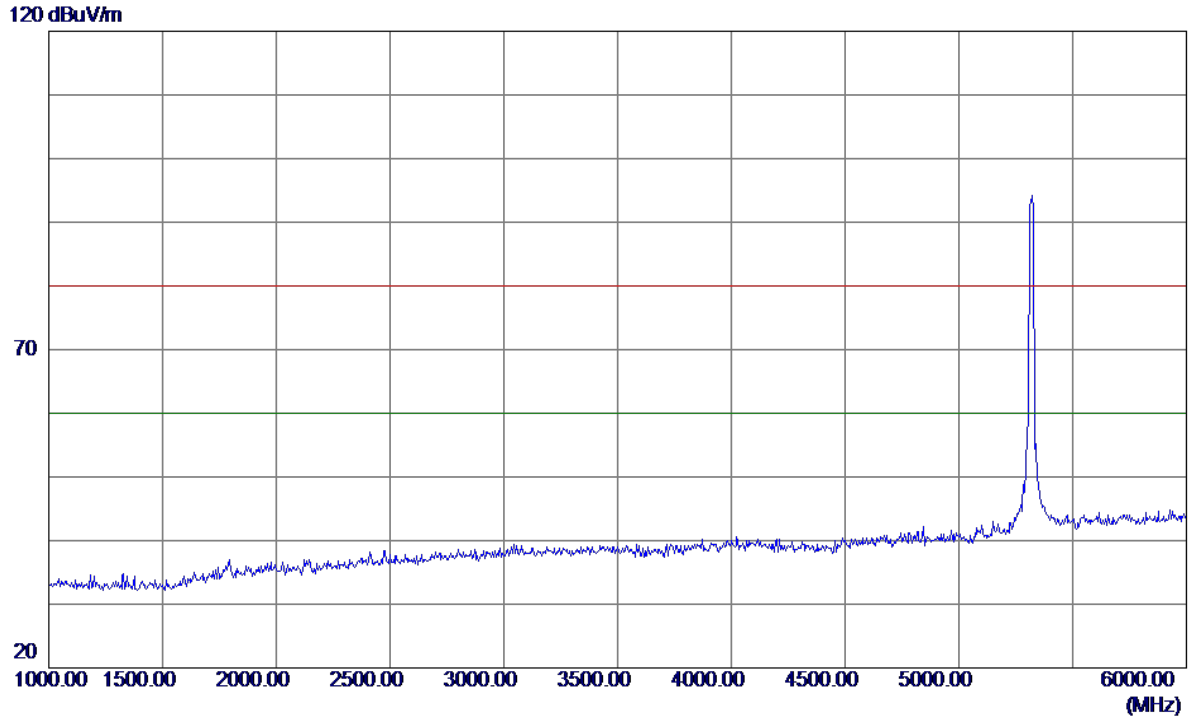


| No. | Freq. | Reading Level | Correct Factor | Measure ment | Limit | Margin | | |
|---|---|---|---|---|---|---|---|---|
| | MHz | dBuV/m | dB | dBuV/m | dBuV/m | dB | Detector | Comment |

| | |
|---|---|
| Orthogonal Axis : | X |
| Test Mode : | UNII-2A/ TX N20 Mode 5320MHz |


**Vertical**

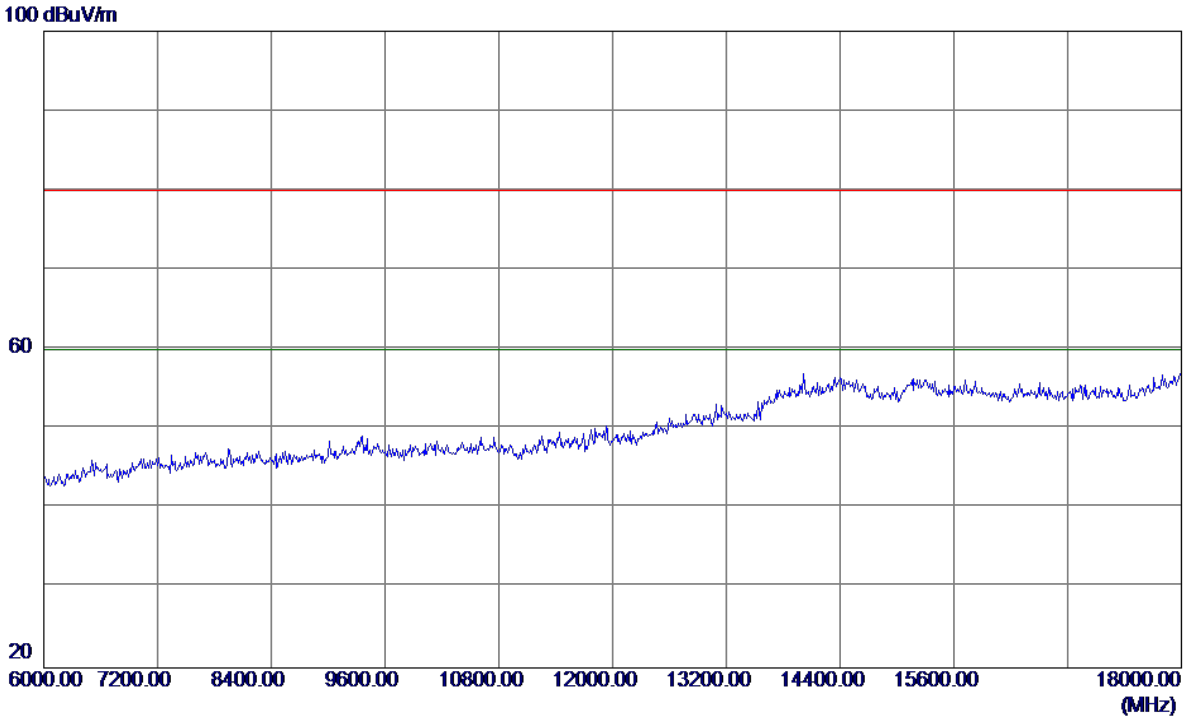


| No. | Freq. | Reading Level | Correct Factor | Measure ment | Limit | Margin | | |
|---|---|---|---|---|---|---|---|---|
| | MHz | dBuV/m | dB | dBuV/m | dBuV/m | dB | Detector | Comment |

| | |
|---|---|
| Orthogonal Axis : | X |
| Test Mode : | UNII-2A/ TX N20 Mode 5320MHz |


**Vertical**

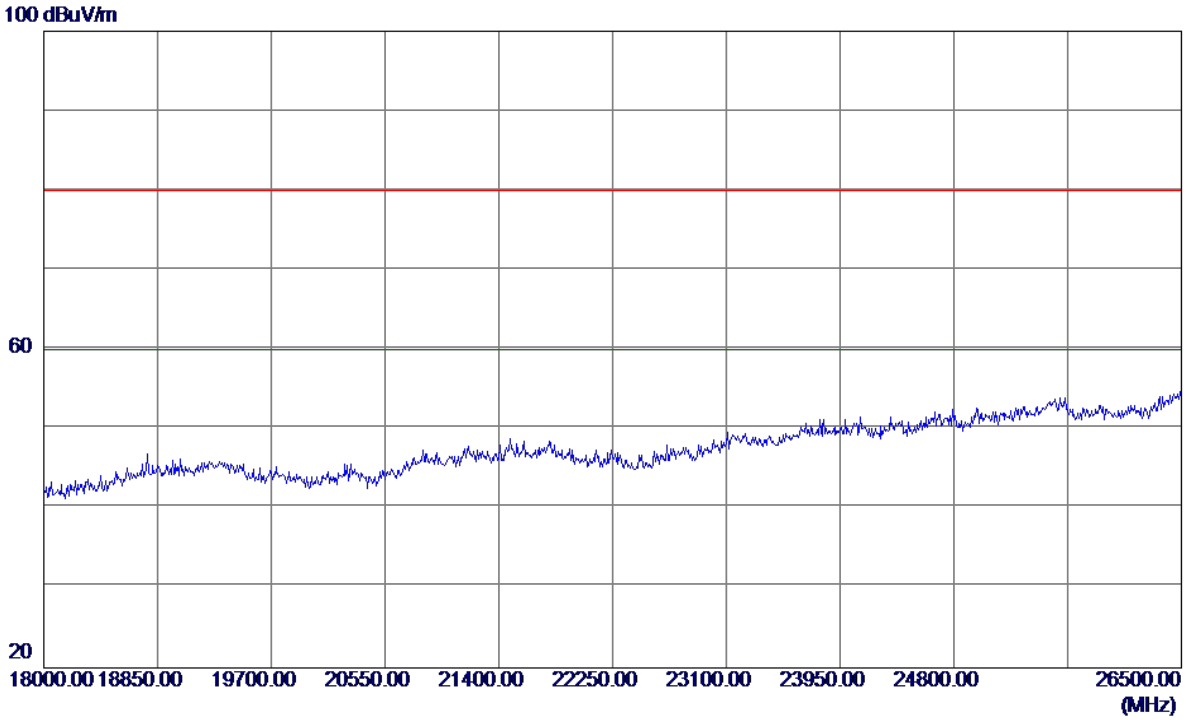


| No. | Freq. | Reading Level | Correct Factor | Measure ment | Limit | Margin | | |
|---|---|---|---|---|---|---|---|---|
| | MHz | dBuV/m | dB | dBuV/m | dBuV/m | dB | Detector | Comment |

| | |
|---|---|
| Orthogonal Axis : | X |
| Test Mode : | UNII-2A/ TX N20 Mode 5320MHz |


**Vertical**

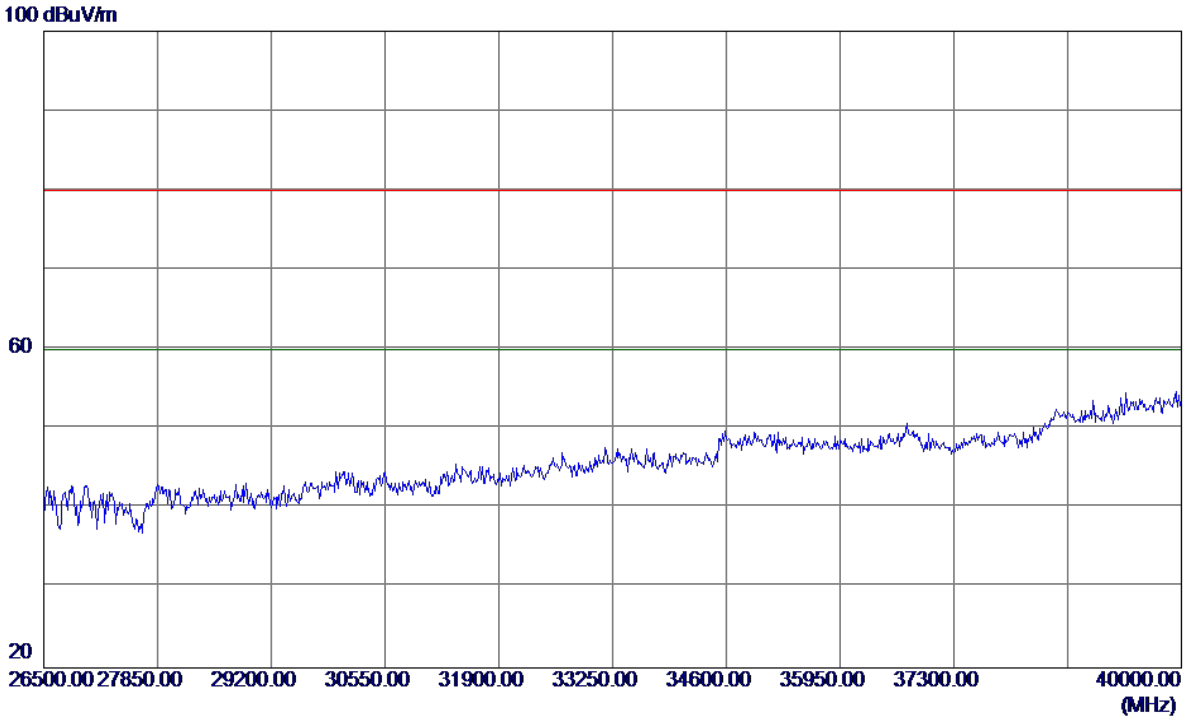


| No. | Freq. | Reading Level | Correct Factor | Measure ment | Limit | Margin | | |
|---|---|---|---|---|---|---|---|---|
| | MHz | dBuV/m | dB | dBuV/m | dBuV/m | dB | Detector | Comment |

| | |
|---|---|
| Orthogonal Axis : | X |
| Test Mode : | UNII-2A/ TX N20 Mode 5320MHz |


**Horizontal**

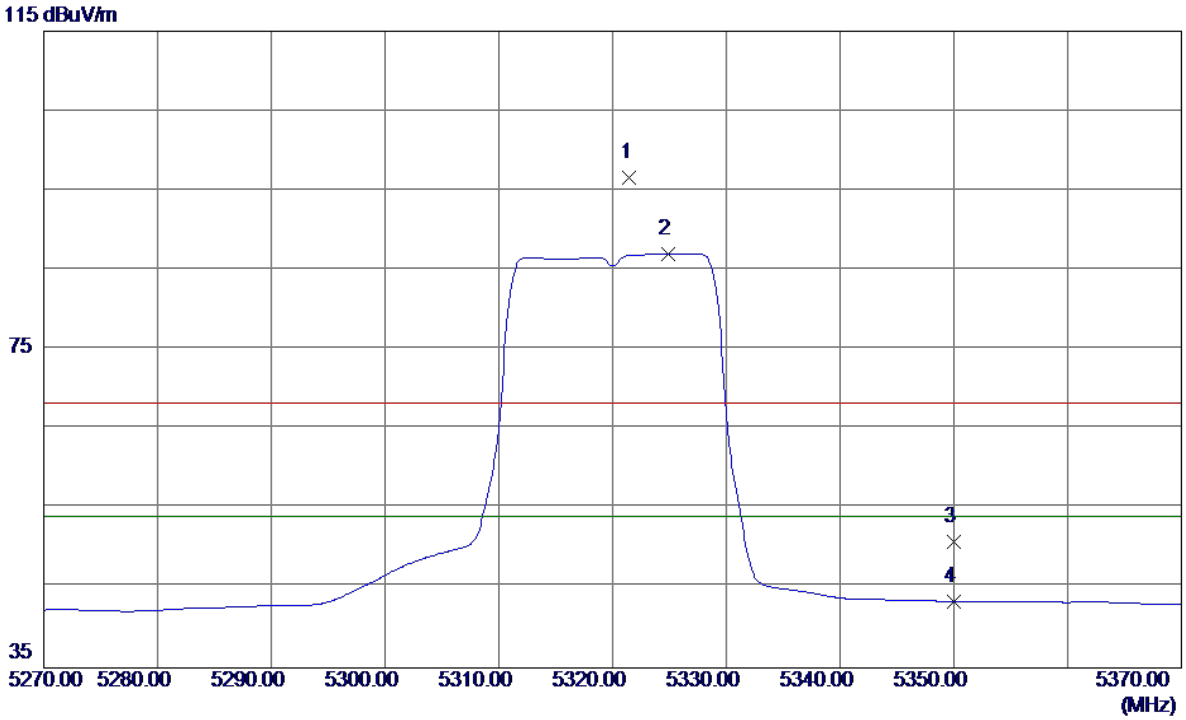


| No. | Freq. | Reading Level | Correct Factor | Measure ment | Limit | Margin | | |
|---|---|---|---|---|---|---|---|---|
| | MHz | dBuV/m | dB | dBuV/m | dBuV/m | dB | Detector | Comment |
| 1 | 5321.5000 | 54.56 | 41.97 | 96.53 | 68.30 | 28.23 | Peak | No Limit |
| 2 * | 5324.9000 | 45.02 | 41.99 | 87.01 | 54.00 | 33.01 | AVG | No Limit |
| 3 | 5350.0000 | 8.65 | 42.12 | 50.77 | 68.30 | -17.53 | Peak | |
| 4 | 5350.0000 | 1.24 | 42.12 | 43.36 | 54.00 | -10.64 | AVG | |

| | |
|---|---|
| Orthogonal Axis : | X |
| Test Mode : | UNII-2A/ TX N20 Mode 5320MHz |


**Horizontal**

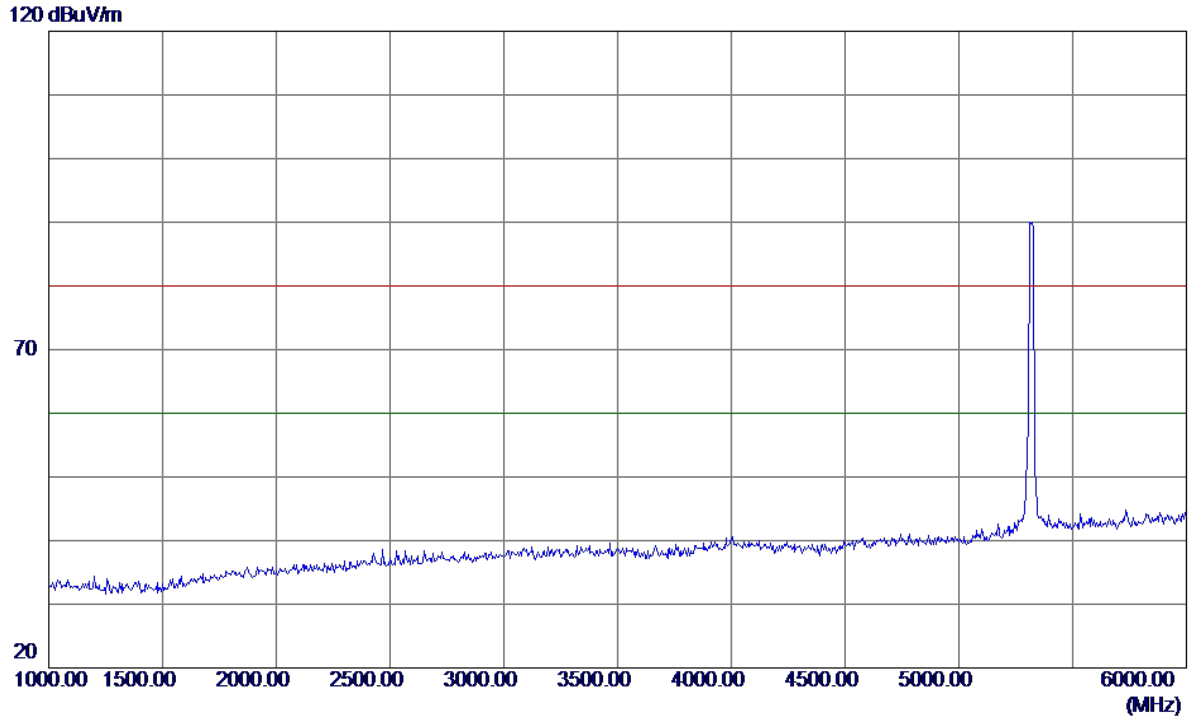


| No. | Freq. | Reading Level | Correct Factor | Measure ment | Limit | Margin | | |
|---|---|---|---|---|---|---|---|---|
| | MHz | dBuV/m | dB | dBuV/m | dBuV/m | dB | Detector | Comment |

| | |
|---|---|
| Orthogonal Axis : | X |
| Test Mode : | UNII-2A/ TX N20 Mode 5320MHz |


**Horizontal**

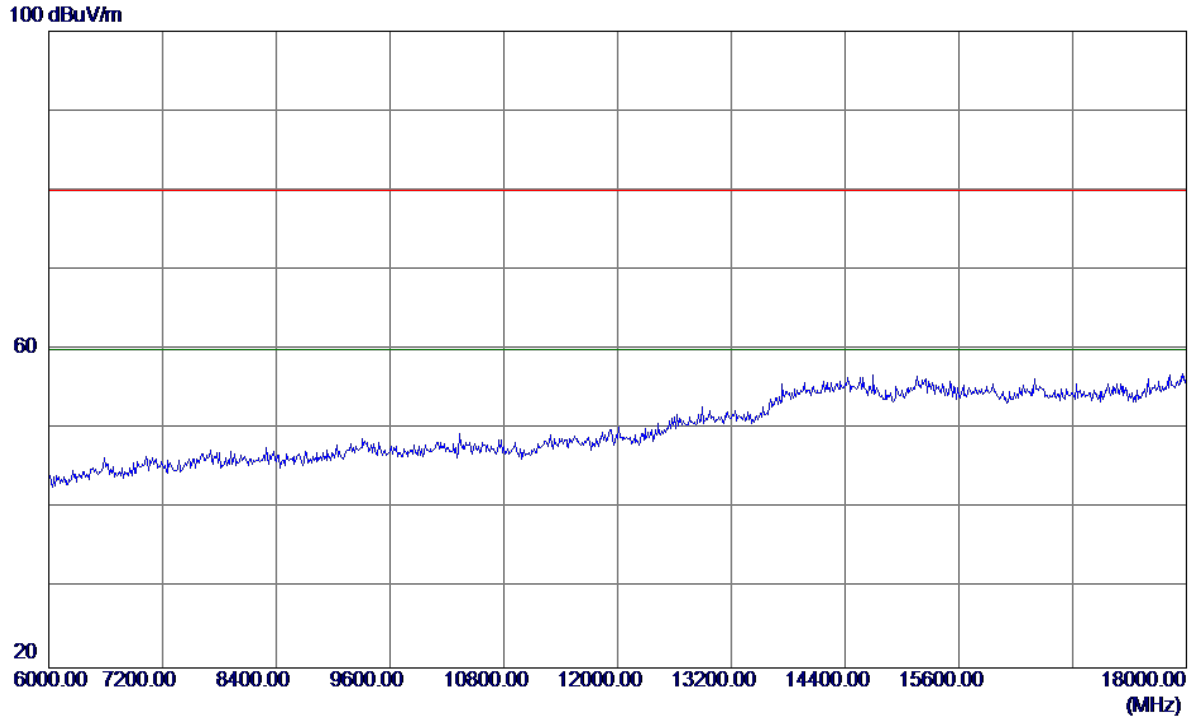


| No. | Freq. | Reading Level | Correct Factor | Measure ment | Limit | Margin | | |
|---|---|---|---|---|---|---|---|---|
| | MHz | dBuV/m | dB | dBuV/m | dBuV/m | dB | Detector | Comment |

| | |
|---|---|
| Orthogonal Axis : | X |
| Test Mode : | UNII-2A/ TX N20 Mode 5320MHz |


**Horizontal**

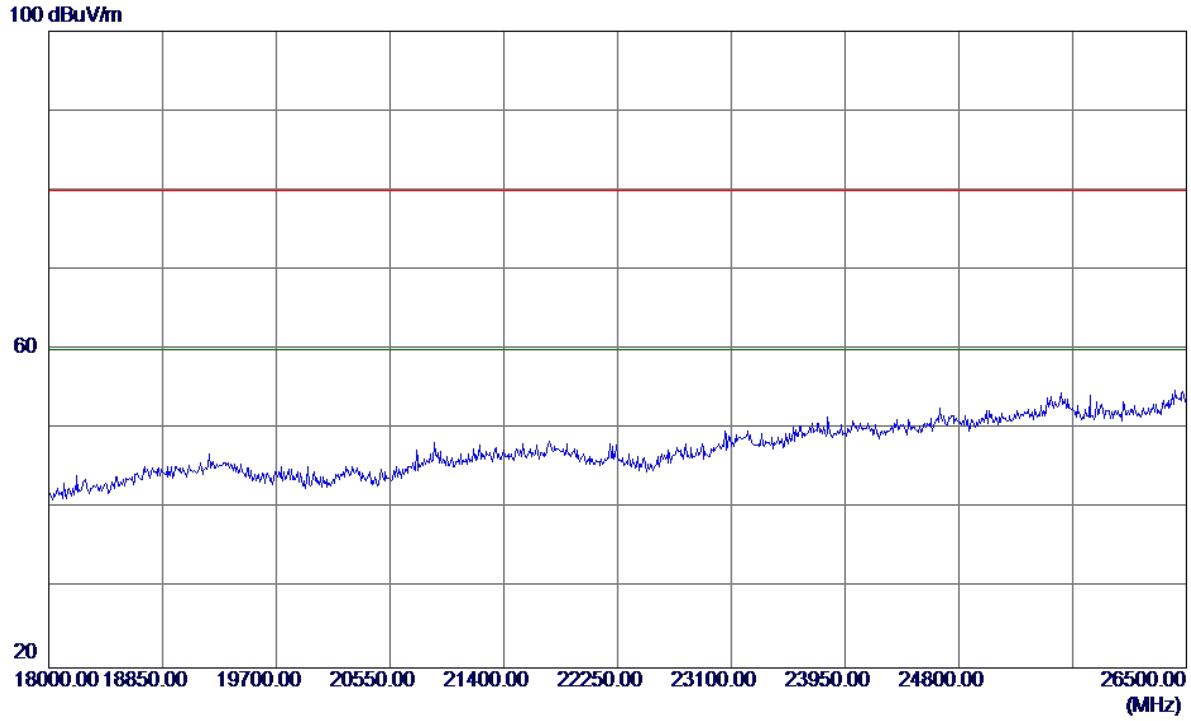


| No. | Freq. | Reading Level | Correct Factor | Measure ment | Limit | Margin | | |
|---|---|---|---|---|---|---|---|---|
| | MHz | dBuV/m | dB | dBuV/m | dBuV/m | dB | Detector | Comment |

| | |
|---|---|
| Orthogonal Axis : | X |
| Test Mode : | UNII-2A/ TX N20 Mode 5320MHz |


**Horizontal**

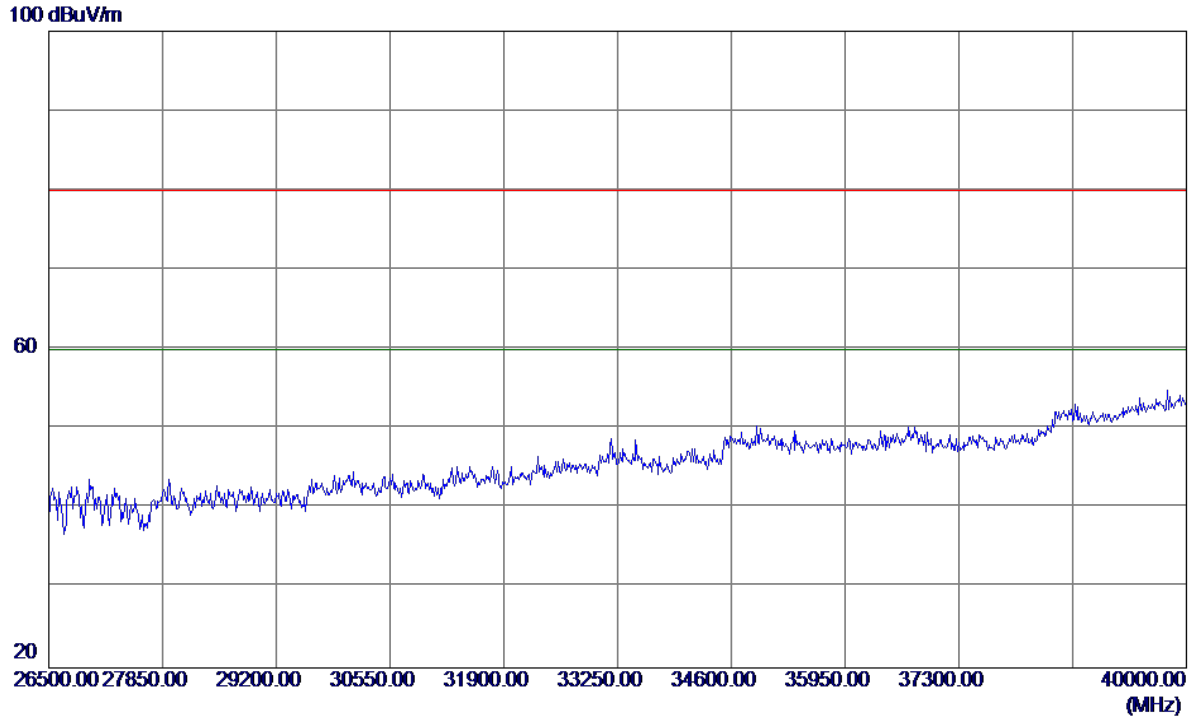


| No. | Freq. | Reading Level | Correct Factor | Measure ment | Limit | Margin | | |
|---|---|---|---|---|---|---|---|---|
| | MHz | dBuV/m | dB | dBuV/m | dBuV/m | dB | Detector | Comment |

| | |
|---|---|
| Orthogonal Axis : | X |
| Test Mode : | UNII-2A/ TX N40 Mode 5270MHz |


**Vertical**

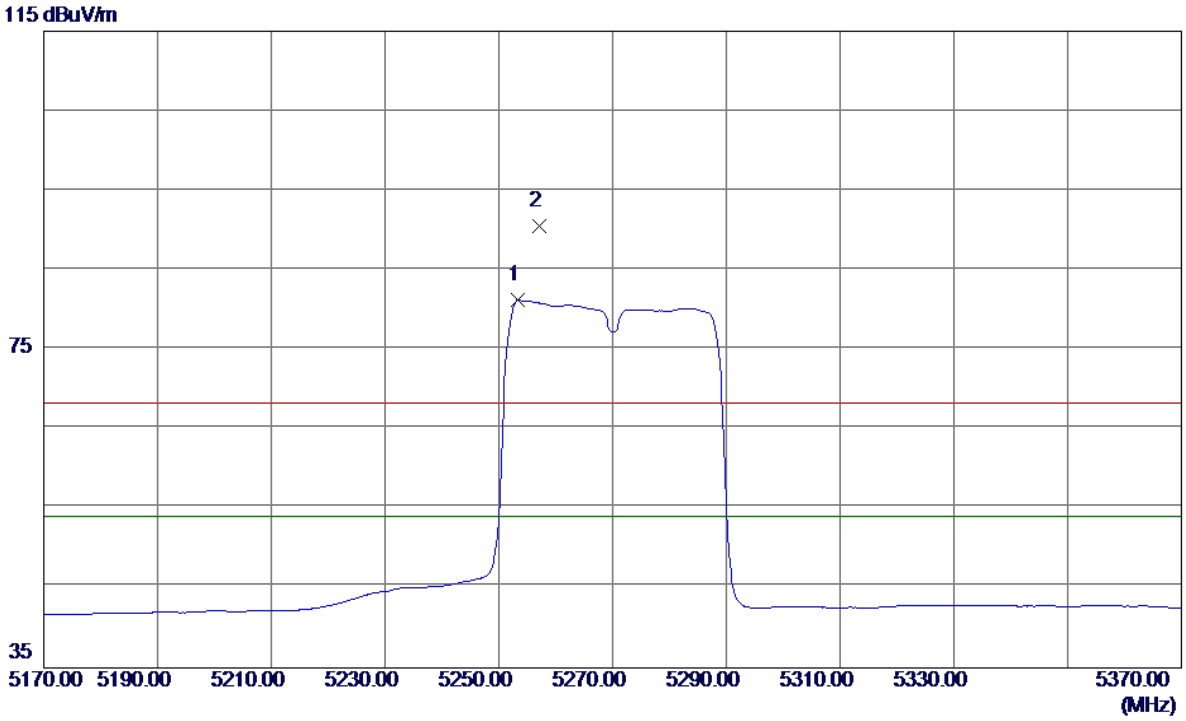


| No. | Freq. | Reading Level | Correct Factor | Measure ment | Limit | Margin | | |
|---|---|---|---|---|---|---|---|---|
| | MHz | dBuV/m | dB | dBuV/m | dBuV/m | dB | Detector | Comment |
| 1 * | 5253.4000 | 39.56 | 41.63 | 81.19 | 54.00 | 27.19 | AVG | No Limit |
| 2 | 5257.2000 | 48.90 | 41.65 | 90.55 | 68.30 | 22.25 | Peak | No Limit |

| | |
|---|---|
| Orthogonal Axis : | X |
| Test Mode : | UNII-2A/ TX N40 Mode 5270MHz |


**Vertical**

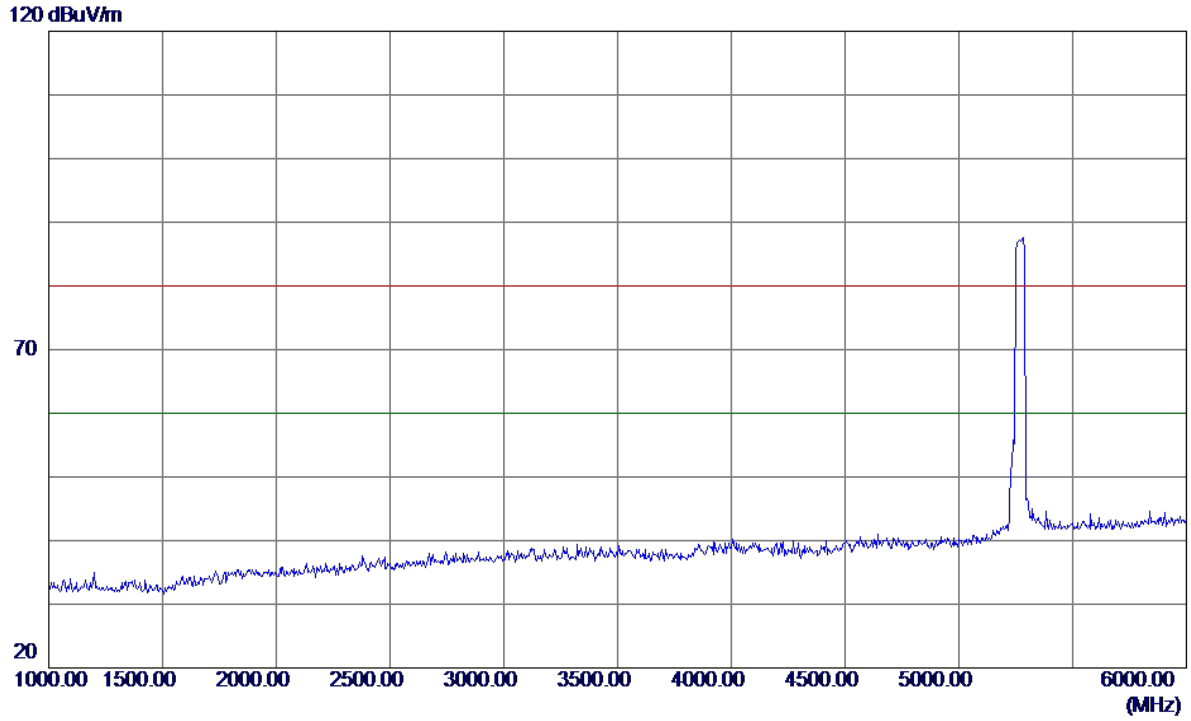


| No. | Freq. | Reading Level | Correct Factor | Measure ment | Limit | Margin | | |
|---|---|---|---|---|---|---|---|---|
| | MHz | dBuV/m | dB | dBuV/m | dBuV/m | dB | Detector | Comment |

| | |
|---|---|
| Orthogonal Axis : | X |
| Test Mode : | UNII-2A/ TX N40 Mode 5270MHz |


**Vertical**

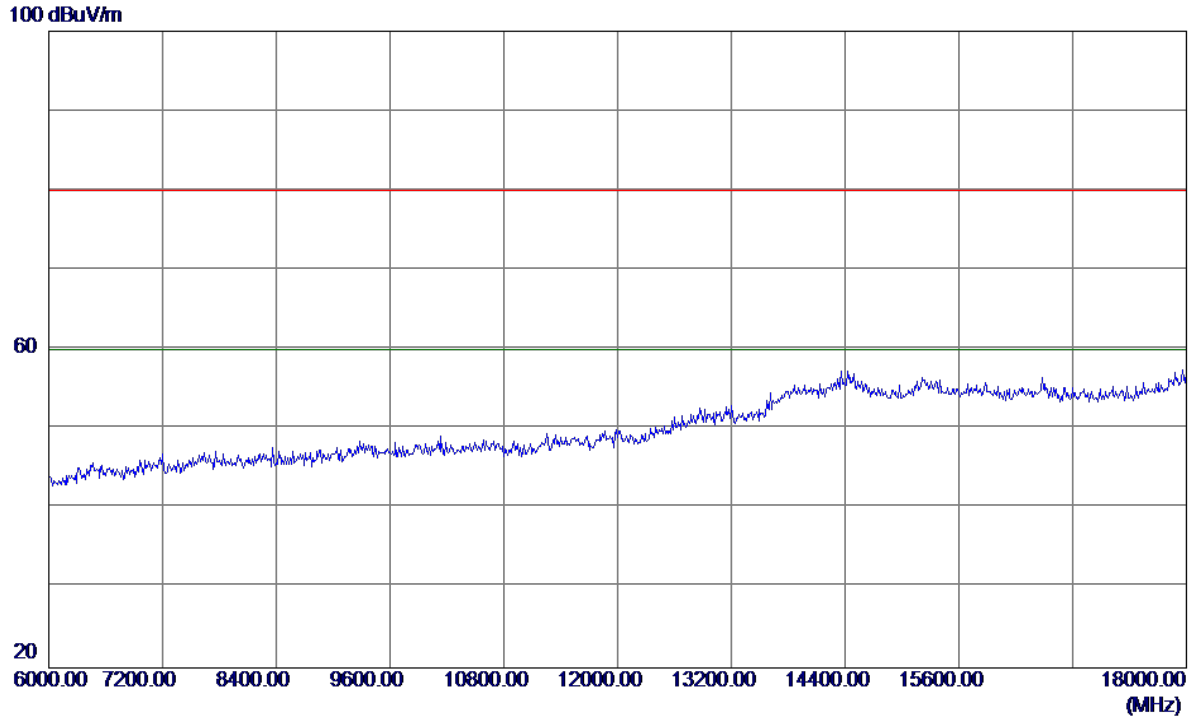


| No. | Freq. | Reading Level | Correct Factor | Measure ment | Limit | Margin | | |
|---|---|---|---|---|---|---|---|---|
| | MHz | dBuV/m | dB | dBuV/m | dBuV/m | dB | Detector | Comment |

| | |
|---|---|
| Orthogonal Axis : | X |
| Test Mode : | UNII-2A/ TX N40 Mode 5270MHz |


**Vertical**

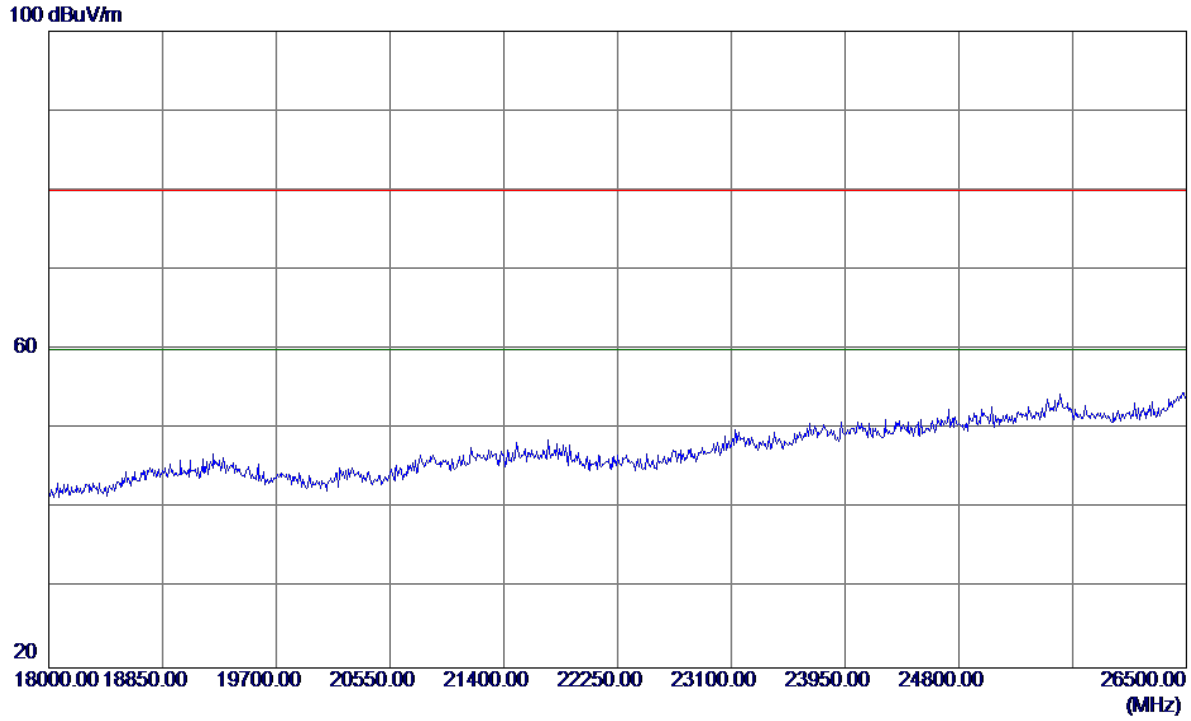


| No. | Freq. | Reading Level | Correct Factor | Measure ment | Limit | Margin | | |
|---|---|---|---|---|---|---|---|---|
| | MHz | dBuV/m | dB | dBuV/m | dBuV/m | dB | Detector | Comment |

| | |
|---|---|
| Orthogonal Axis : | X |
| Test Mode : | UNII-2A/ TX N40 Mode 5270MHz |


**Vertical**

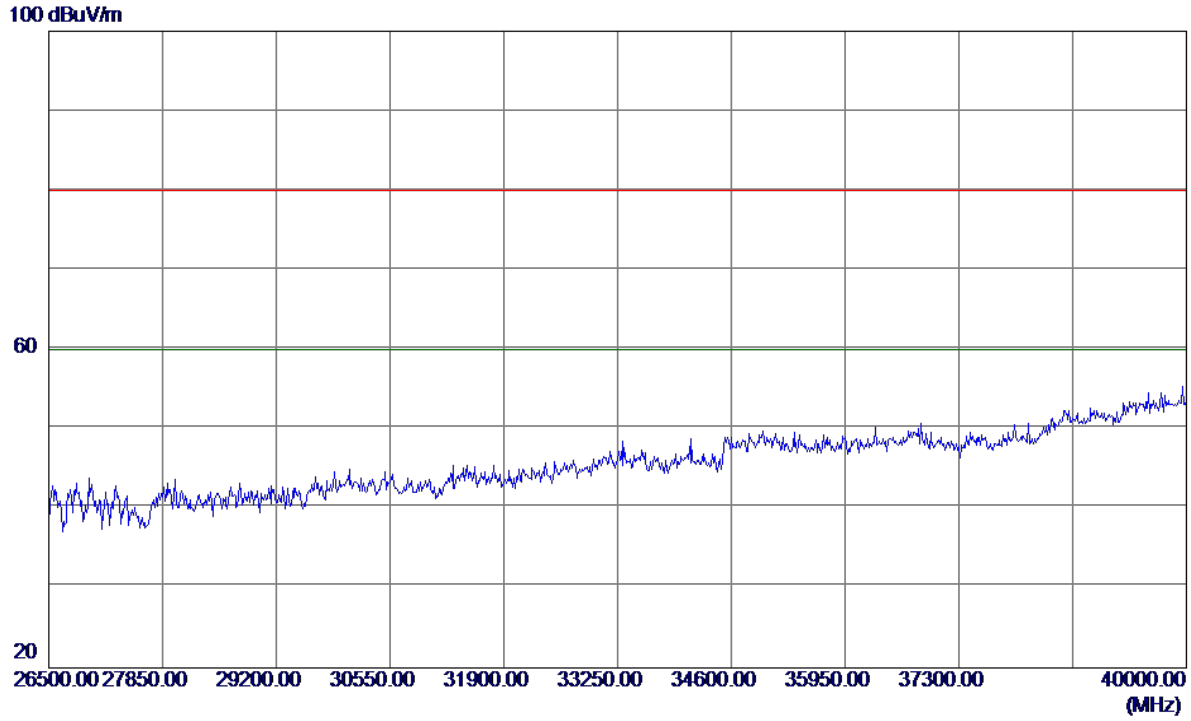


| No. | Freq. | Reading Level | Correct Factor | Measure ment | Limit | Margin | | |
|---|---|---|---|---|---|---|---|---|
| | MHz | dBuV/m | dB | dBuV/m | dBuV/m | dB | Detector | Comment |

| | |
|---|---|
| Orthogonal Axis : | X |
| Test Mode : | UNII-2A/ TX N40 Mode 5270MHz |


**Horizontal**

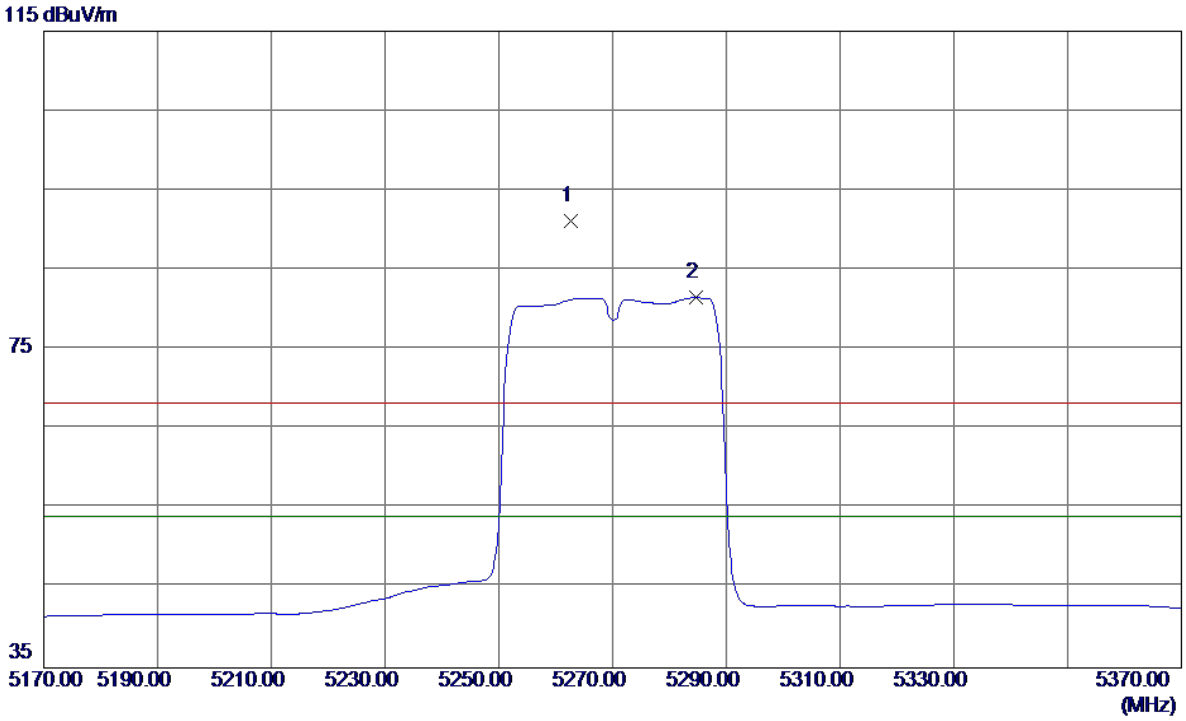


| No. | Freq. | Reading Level | Correct Factor | Measure ment | Limit | Margin | | |
|---|---|---|---|---|---|---|---|---|
| | MHz | dBuV/m | dB | dBuV/m | dBuV/m | dB | Detector | Comment |
| 1 | 5262.6000 | 49.53 | 41.67 | 91.20 | 68.30 | 22.90 | Peak | No Limit |
| 2 * | 5284.6000 | 39.72 | 41.79 | 81.51 | 54.00 | 27.51 | AVG | No Limit |

| | |
|---|---|
| Orthogonal Axis : | X |
| Test Mode : | UNII-2A/ TX N40 Mode 5270MHz |


**Horizontal**

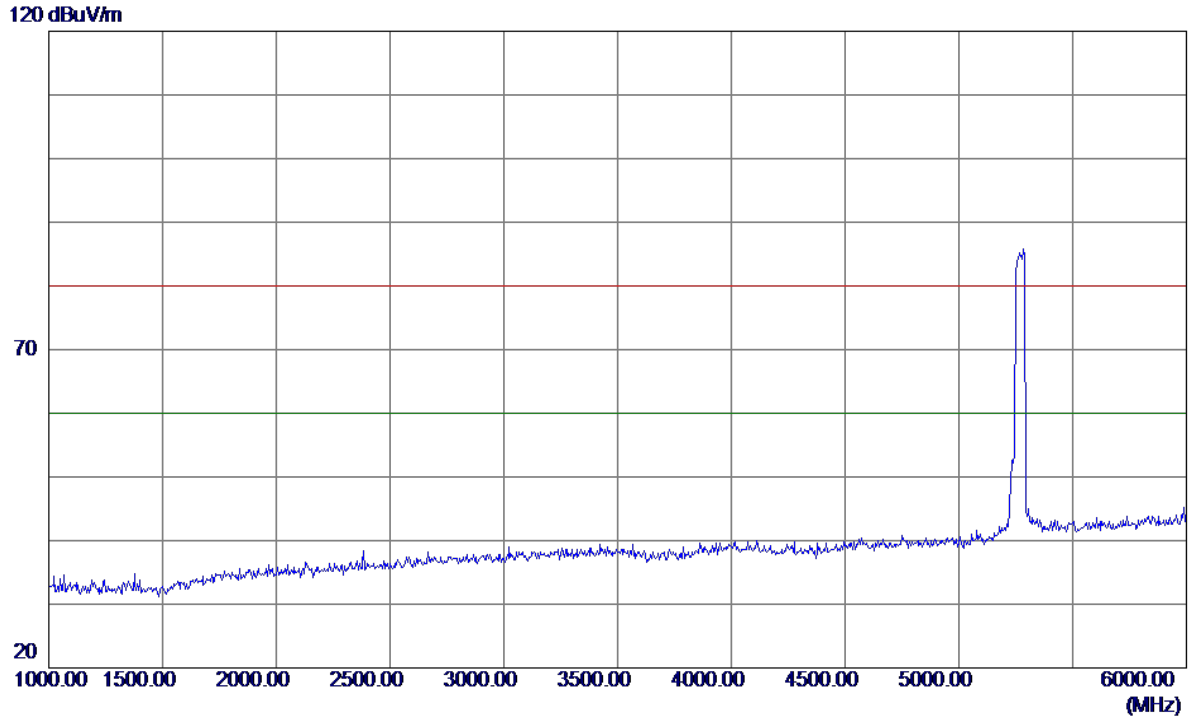


| No. | Freq. | Reading Level | Correct Factor | Measure ment | Limit | Margin | | |
|---|---|---|---|---|---|---|---|---|
| | MHz | dBuV/m | dB | dBuV/m | dBuV/m | dB | Detector | Comment |

| | |
|---|---|
| Orthogonal Axis : | X |
| Test Mode : | UNII-2A/ TX N40 Mode 5270MHz |


**Horizontal**

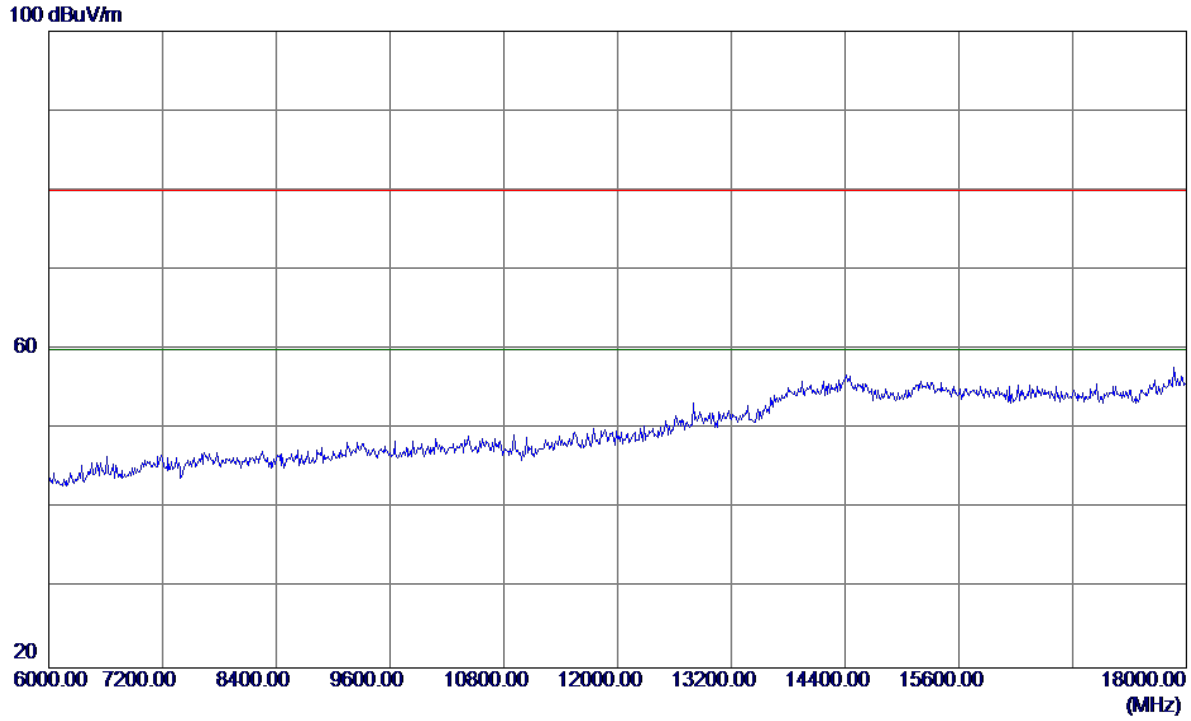


| No. | Freq. | Reading Level | Correct Factor | Measure ment | Limit | Margin | | |
|---|---|---|---|---|---|---|---|---|
| | MHz | dBuV/m | dB | dBuV/m | dBuV/m | dB | Detector | Comment |

| | |
|---|---|
| Orthogonal Axis : | X |
| Test Mode : | UNII-2A/ TX N40 Mode 5270MHz |


**Horizontal**

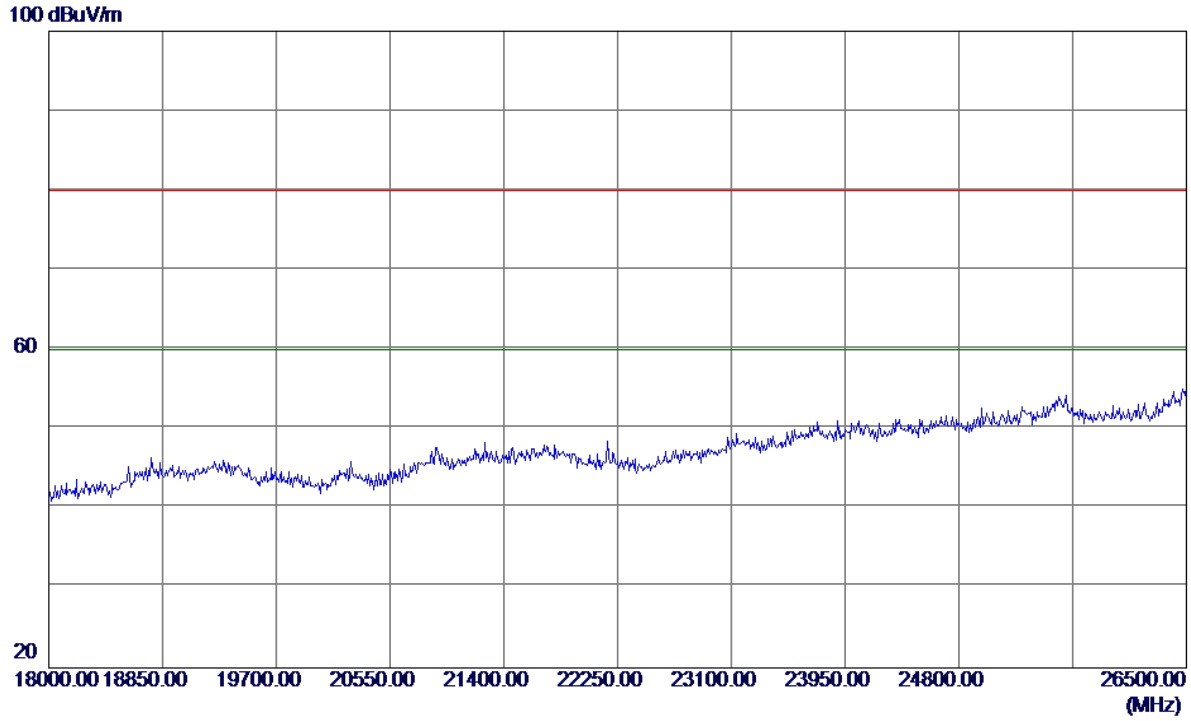


| No. | Freq. | Reading Level | Correct Factor | Measure ment | Limit | Margin | | |
|---|---|---|---|---|---|---|---|---|
| | MHz | dBuV/m | dB | dBuV/m | dBuV/m | dB | Detector | Comment |

| | |
|---|---|
| Orthogonal Axis : | X |
| Test Mode : | UNII-2A/ TX N40 Mode 5270MHz |


**Horizontal**

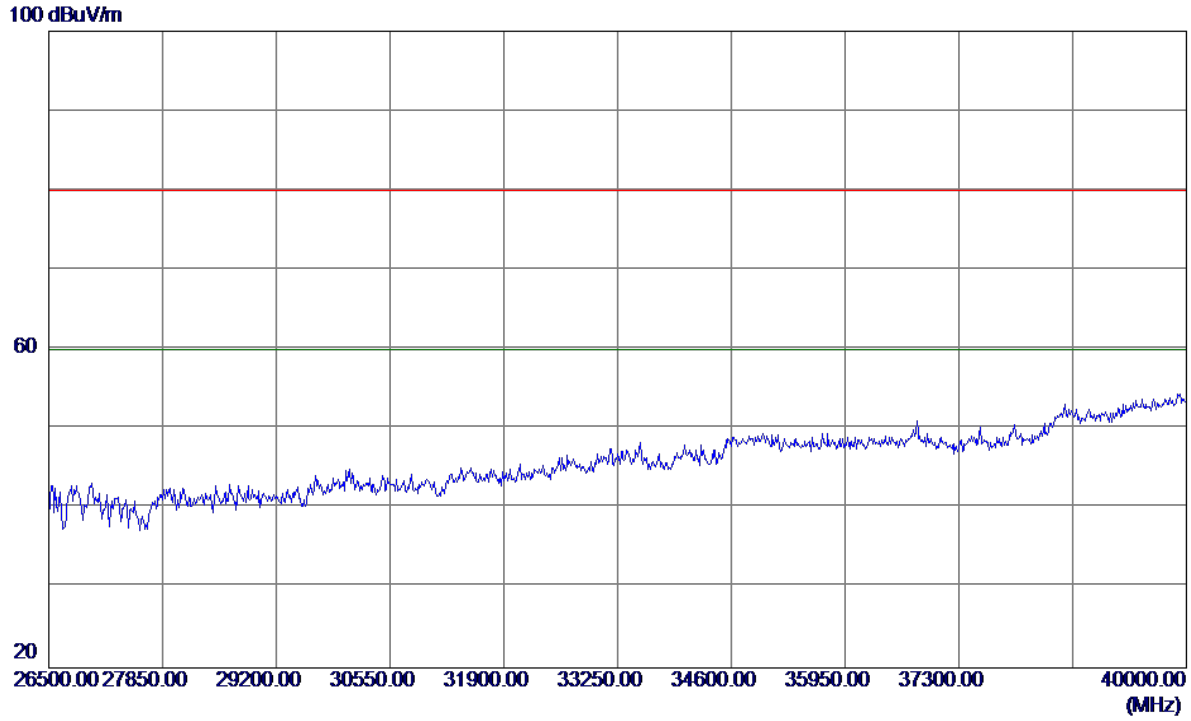


| No. | Freq. | Reading Level | Correct Factor | Measure ment | Limit | Margin | | |
|---|---|---|---|---|---|---|---|---|
| | MHz | dBuV/m | dB | dBuV/m | dBuV/m | dB | Detector | Comment |

| | |
|---|---|
| Orthogonal Axis : | X |
| Test Mode : | UNII-2A/ TX N40 Mode 5310MHz |


**Vertical**

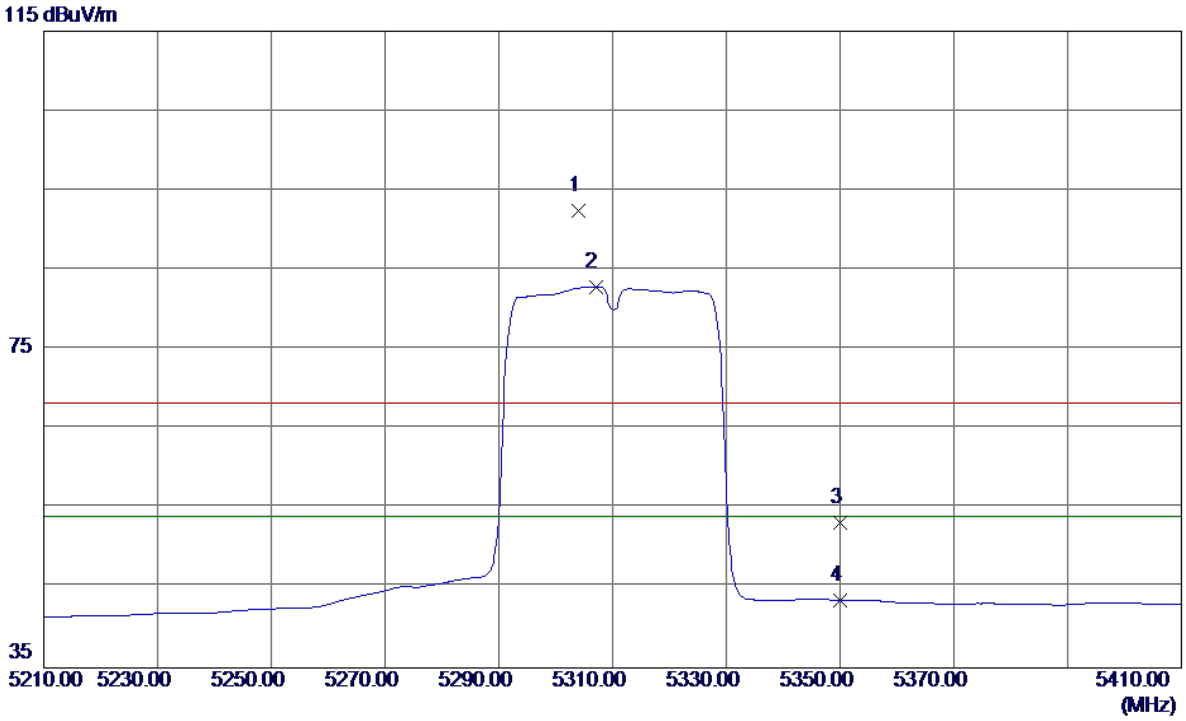


| No. | Freq. | Reading Level | Correct Factor | Measure ment | Limit | Margin | | |
|---|---|---|---|---|---|---|---|---|
| | MHz | dBuV/m | dB | dBuV/m | dBuV/m | dB | Detector | Comment |
| 1 | 5304.0000 | 50.56 | 41.88 | 92.44 | 68.30 | 24.14 | Peak | No Limit |
| 2 * | 5307.0000 | 41.01 | 41.90 | 82.91 | 54.00 | 28.91 | AVG | No Limit |
| 3 | 5350.0000 | 11.14 | 42.12 | 53.26 | 68.30 | -15.04 | Peak | |
| 4 | 5350.0000 | 1.33 | 42.12 | 43.45 | 54.00 | -10.55 | AVG | |

| | |
|---|---|
| Orthogonal Axis : | X |
| Test Mode : | UNII-2A/ TX N40 Mode 5310MHz |


**Vertical**

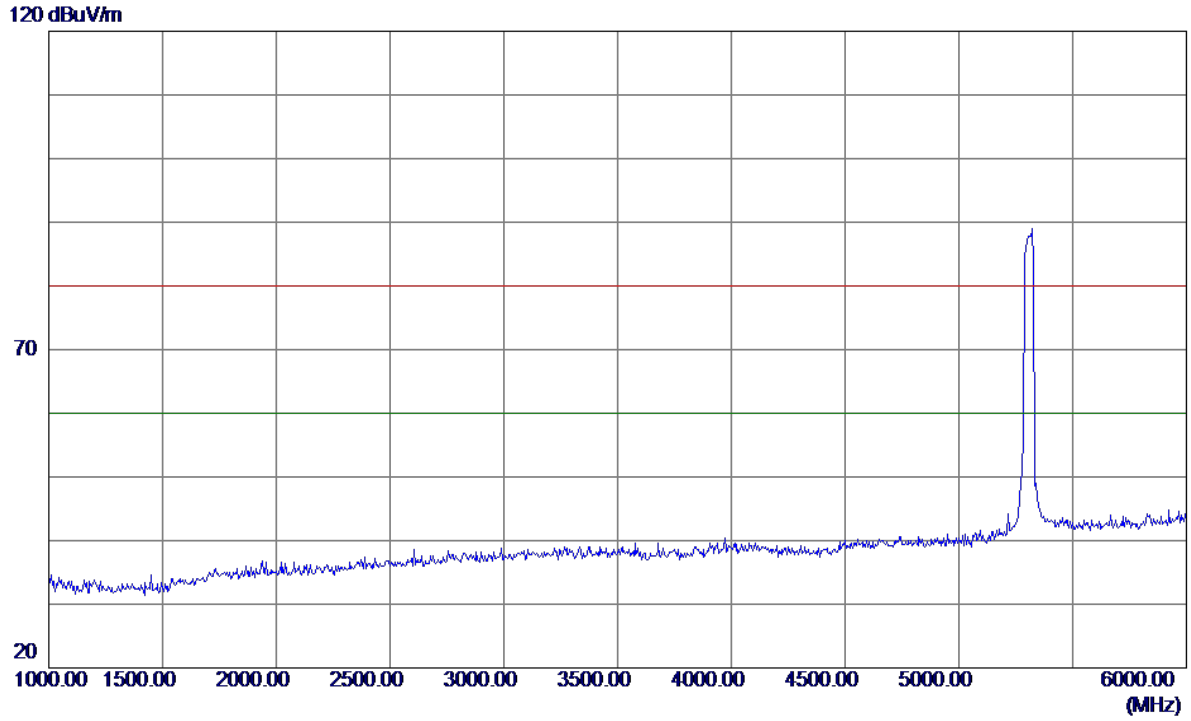


| No. | Freq. | Reading Level | Correct Factor | Measure ment | Limit | Margin | | |
|---|---|---|---|---|---|---|---|---|
| | MHz | dBuV/m | dB | dBuV/m | dBuV/m | dB | Detector | Comment |

| | |
|---|---|
| Orthogonal Axis : | X |
| Test Mode : | UNII-2A/ TX N40 Mode 5310MHz |


**Vertical**

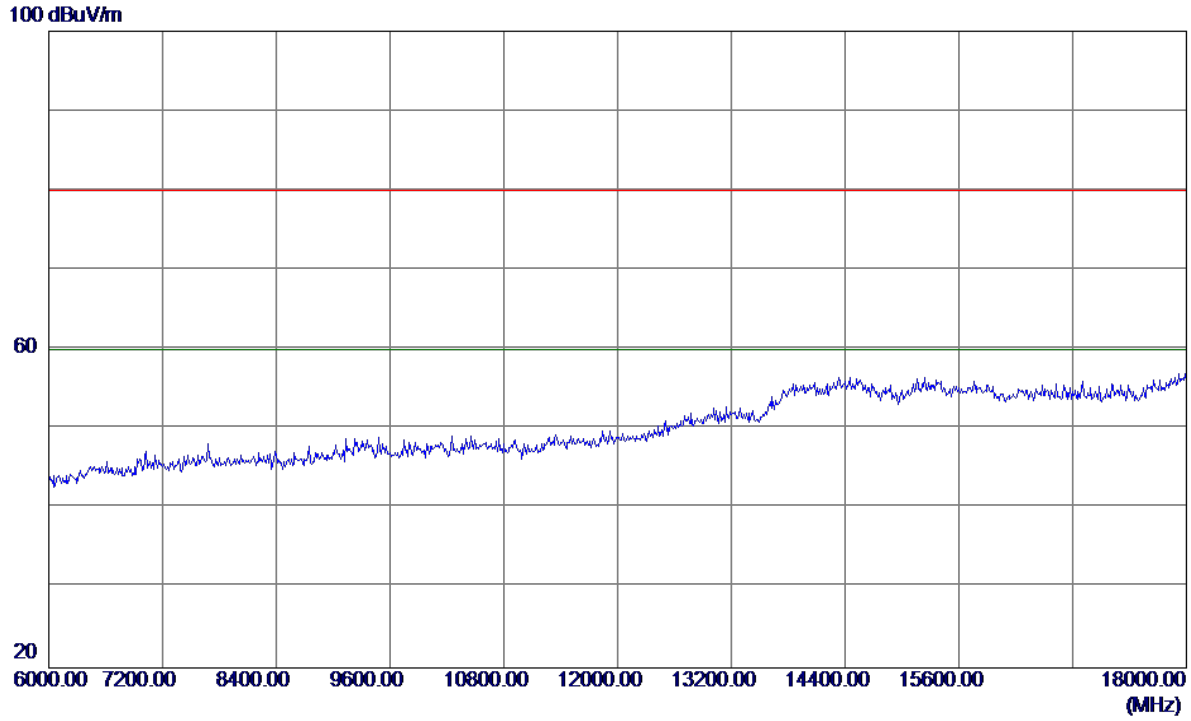


| No. | Freq. | Reading Level | Correct Factor | Measure ment | Limit | Margin | | |
|---|---|---|---|---|---|---|---|---|
| | MHz | dBuV/m | dB | dBuV/m | dBuV/m | dB | Detector | Comment |

| | |
|---|---|
| Orthogonal Axis : | X |
| Test Mode : | UNII-2A/ TX N40 Mode 5310MHz |


**Vertical**

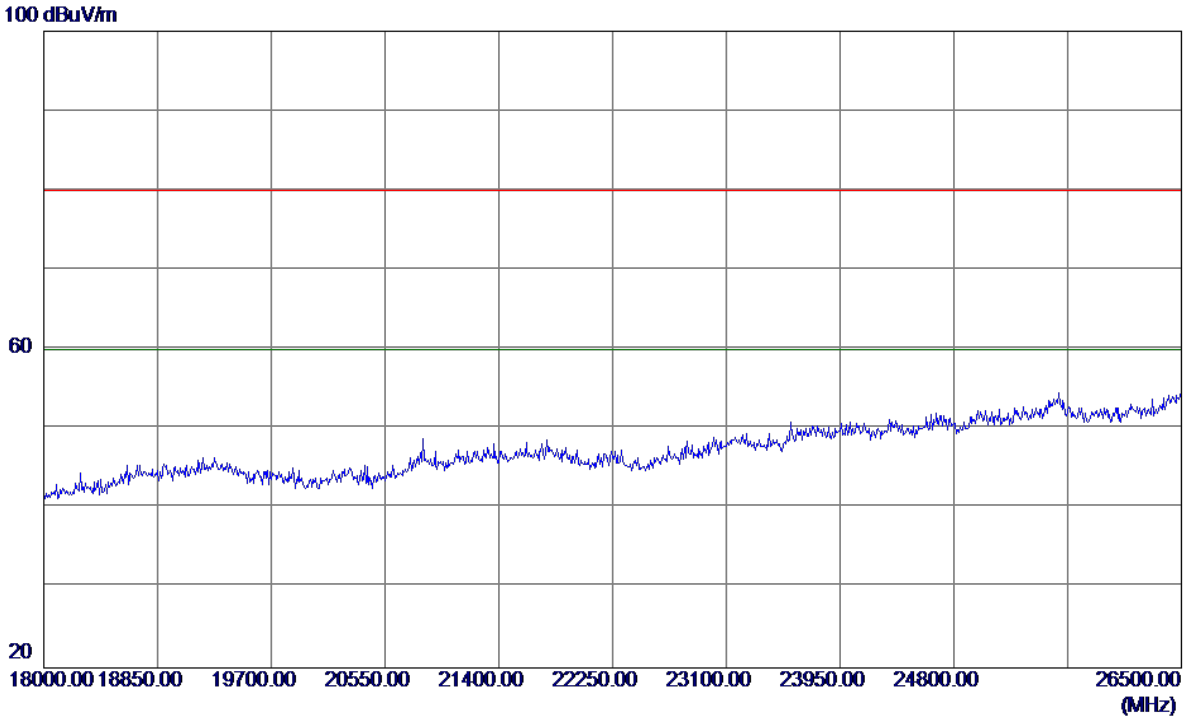


| No. | Freq. | Reading Level | Correct Factor | Measure ment | Limit | Margin | | |
|---|---|---|---|---|---|---|---|---|
| | MHz | dBuV/m | dB | dBuV/m | dBuV/m | dB | Detector | Comment |

| | |
|---|---|
| Orthogonal Axis : | X |
| Test Mode : | UNII-2A/ TX N40 Mode 5310MHz |


**Vertical**

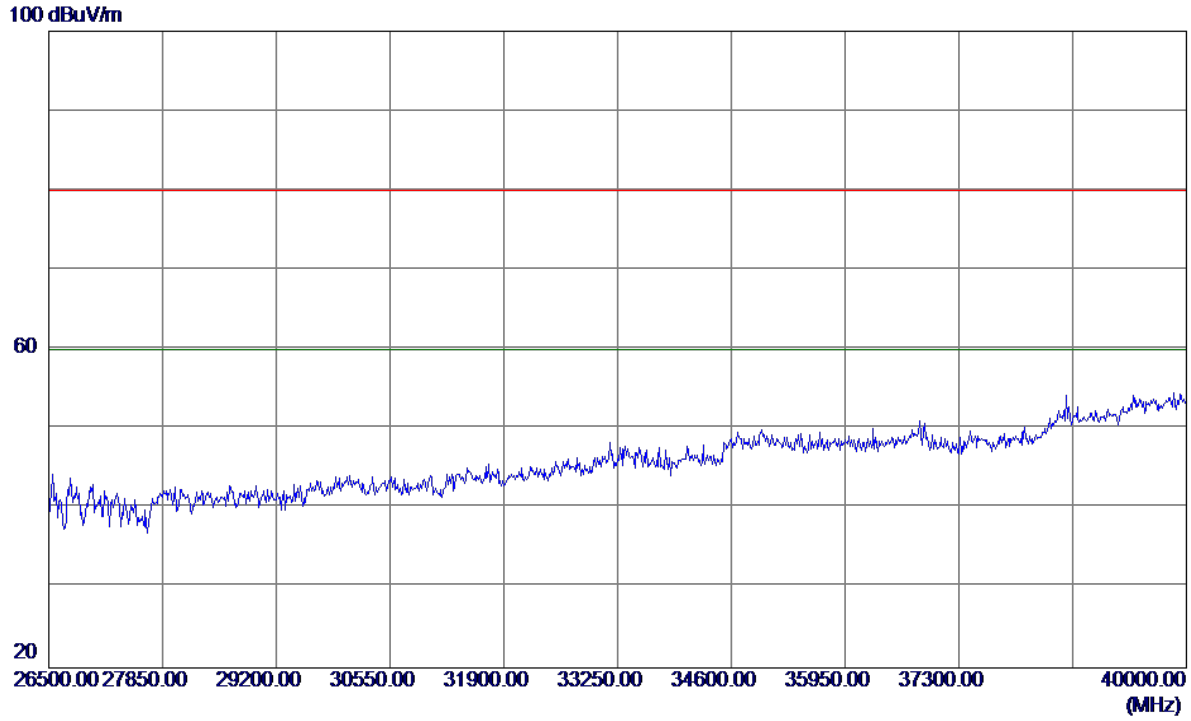


| No. | Freq. | Reading Level | Correct Factor | Measure ment | Limit | Margin | | |
|---|---|---|---|---|---|---|---|---|
| | MHz | dBuV/m | dB | dBuV/m | dBuV/m | dB | Detector | Comment |

| | |
|---|---|
| Orthogonal Axis : | X |
| Test Mode : | UNII-2A/ TX N40 Mode 5310MHz |


**Horizontal**

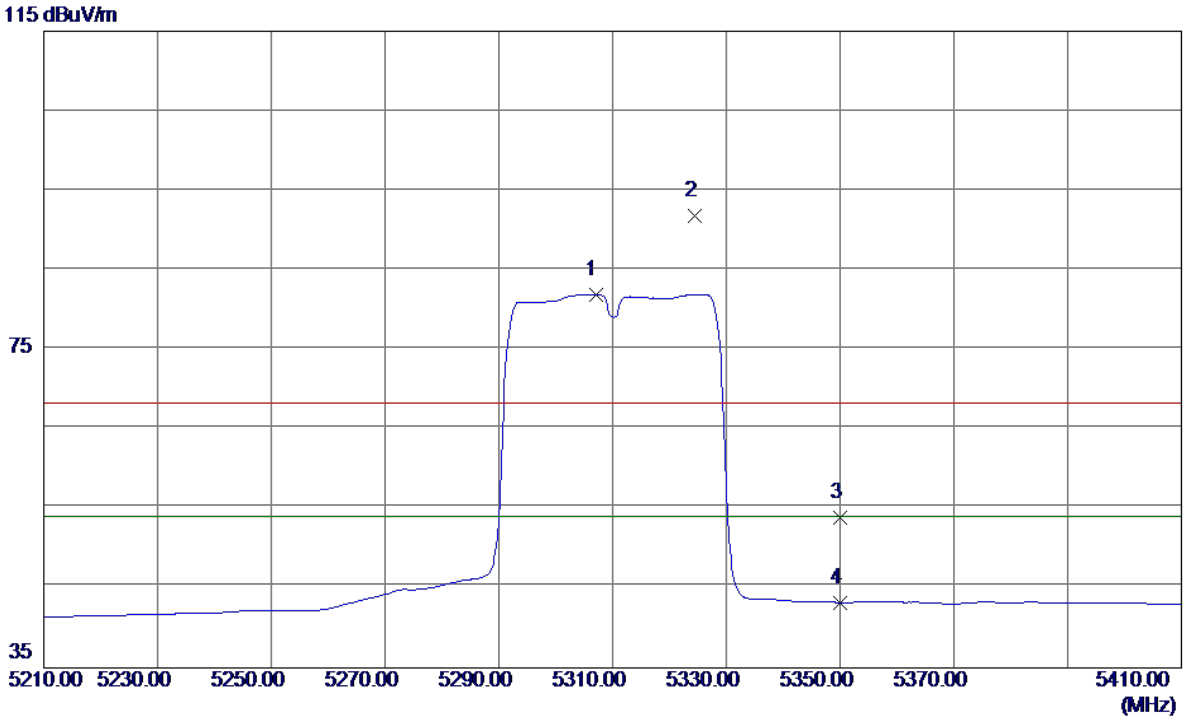


| No. | Freq. | Reading Level | Correct Factor | Measure ment | Limit | Margin | | |
|---|---|---|---|---|---|---|---|---|
| | MHz | dBuV/m | dB | dBuV/m | dBuV/m | dB | Detector | Comment |
| 1 * | 5307.0000 | 40.04 | 41.90 | 81.94 | 54.00 | 27.94 | AVG | No Limit |
| 2 | 5324.4000 | 49.82 | 41.99 | 91.81 | 68.30 | 23.51 | Peak | No Limit |
| 3 | 5350.0000 | 11.72 | 42.12 | 53.84 | 68.30 | -14.46 | Peak | |
| 4 | 5350.0000 | 1.10 | 42.12 | 43.22 | 54.00 | -10.78 | AVG | |

| | |
|---|---|
| Orthogonal Axis : | X |
| Test Mode : | UNII-2A/ TX N40 Mode 5310MHz |


**Horizontal**

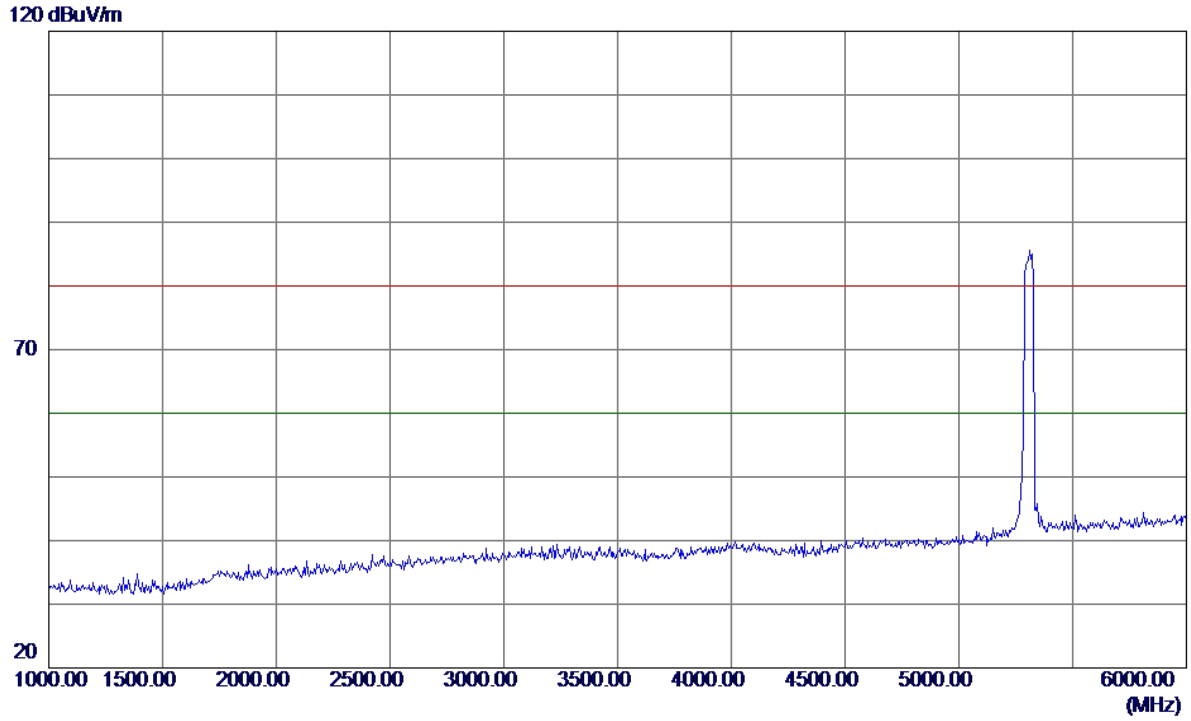


| No. | Freq. | Reading Level | Correct Factor | Measure ment | Limit | Margin | | |
|---|---|---|---|---|---|---|---|---|
| | MHz | dBuV/m | dB | dBuV/m | dBuV/m | dB | Detector | Comment |

| | |
|---|---|
| Orthogonal Axis : | X |
| Test Mode : | UNII-2A/ TX N40 Mode 5310MHz |


**Horizontal**

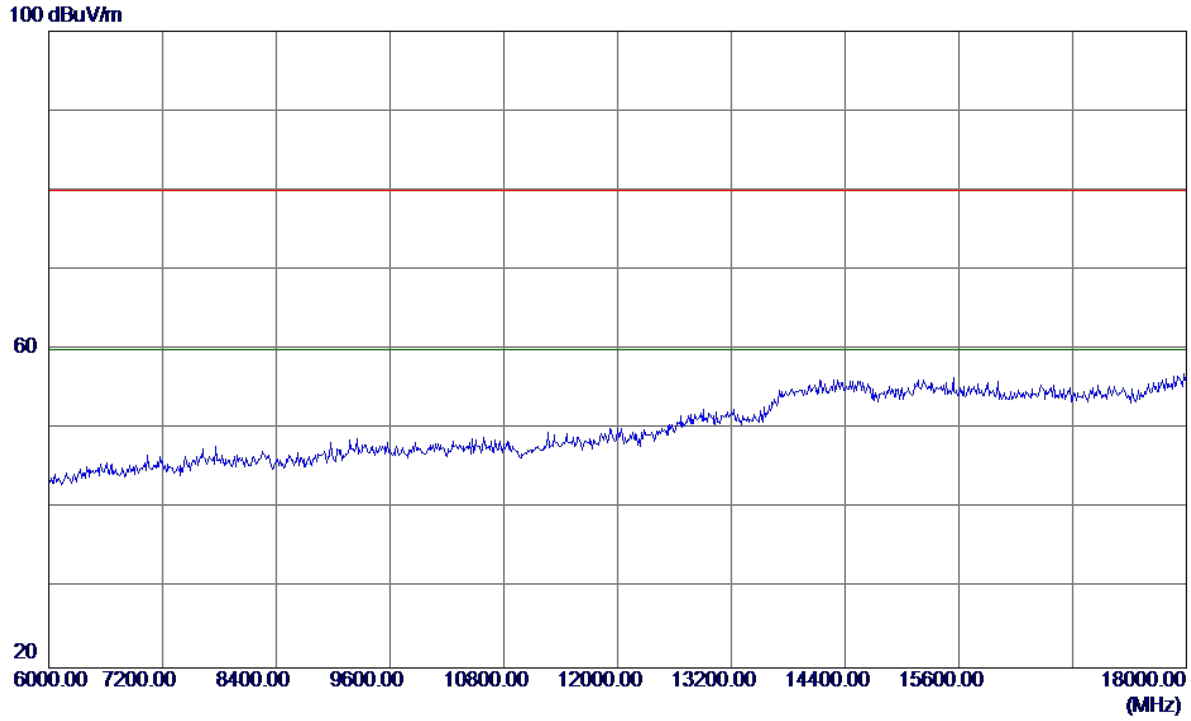


| No. | Freq. | Reading Level | Correct Factor | Measure ment | Limit | Margin | | |
|---|---|---|---|---|---|---|---|---|
| | MHz | dBuV/m | dB | dBuV/m | dBuV/m | dB | Detector | Comment |

| | |
|---|---|
| Orthogonal Axis : | X |
| Test Mode : | UNII-2A/ TX N40 Mode 5310MHz |


**Horizontal**

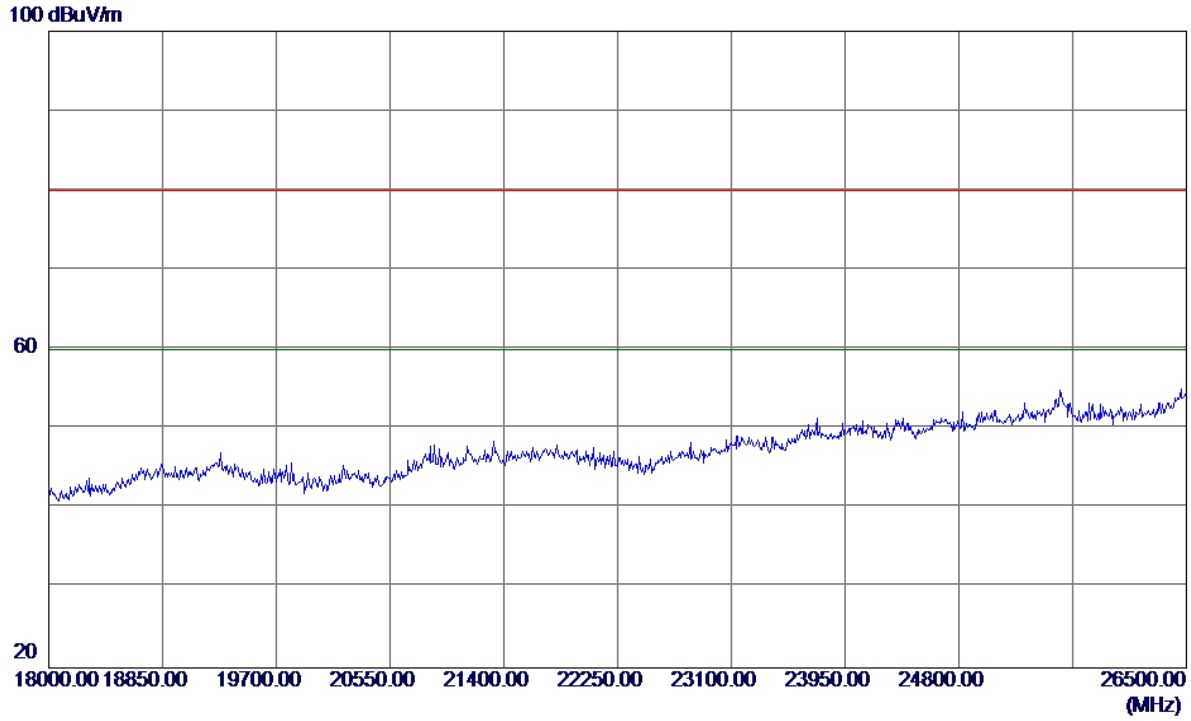


| No. | Freq. | Reading Level | Correct Factor | Measure ment | Limit | Margin | | |
|---|---|---|---|---|---|---|---|---|
| | MHz | dBuV/m | dB | dBuV/m | dBuV/m | dB | Detector | Comment |

| | |
|---|---|
| Orthogonal Axis : | X |
| Test Mode : | UNII-2A/ TX N40 Mode 5310MHz |


**Horizontal**

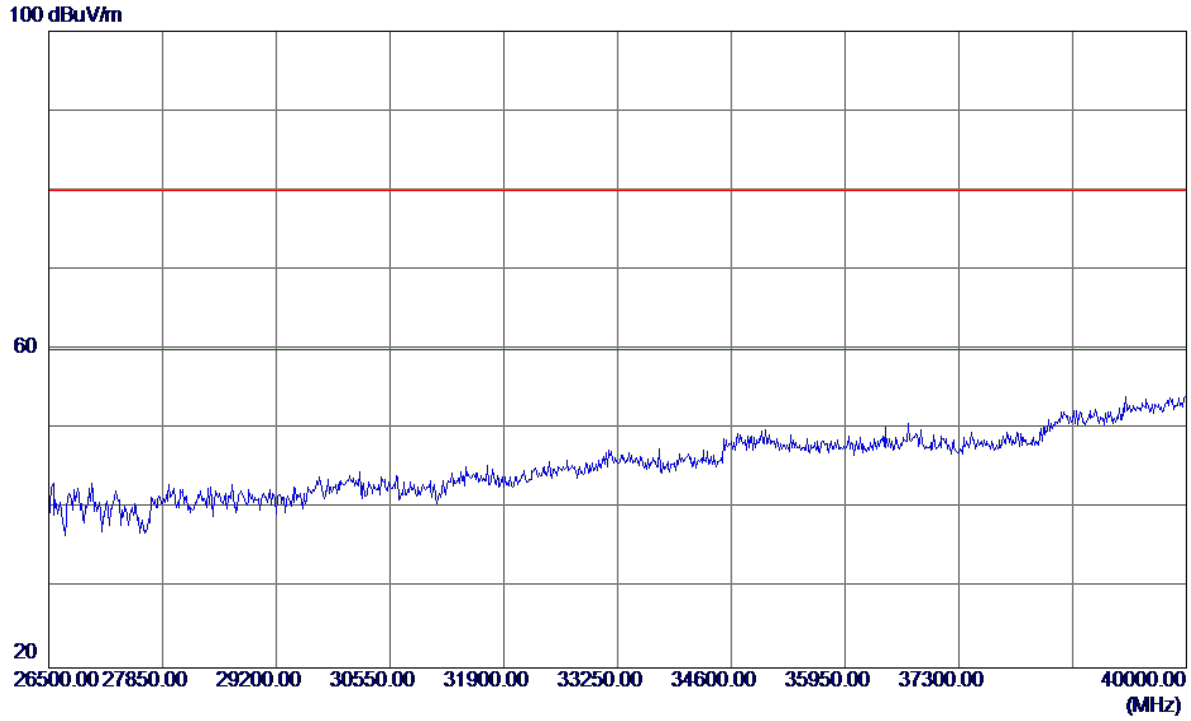


| No. | Freq. | Reading Level | Correct Factor | Measure ment | Limit | Margin | | |
|---|---|---|---|---|---|---|---|---|
| | MHz | dBuV/m | dB | dBuV/m | dBuV/m | dB | Detector | Comment |

| | |
|---|---|
| Orthogonal Axis : | X |
| Test Mode : | UNII-2C/ TX A Mode 5500MHz |


**Vertical**

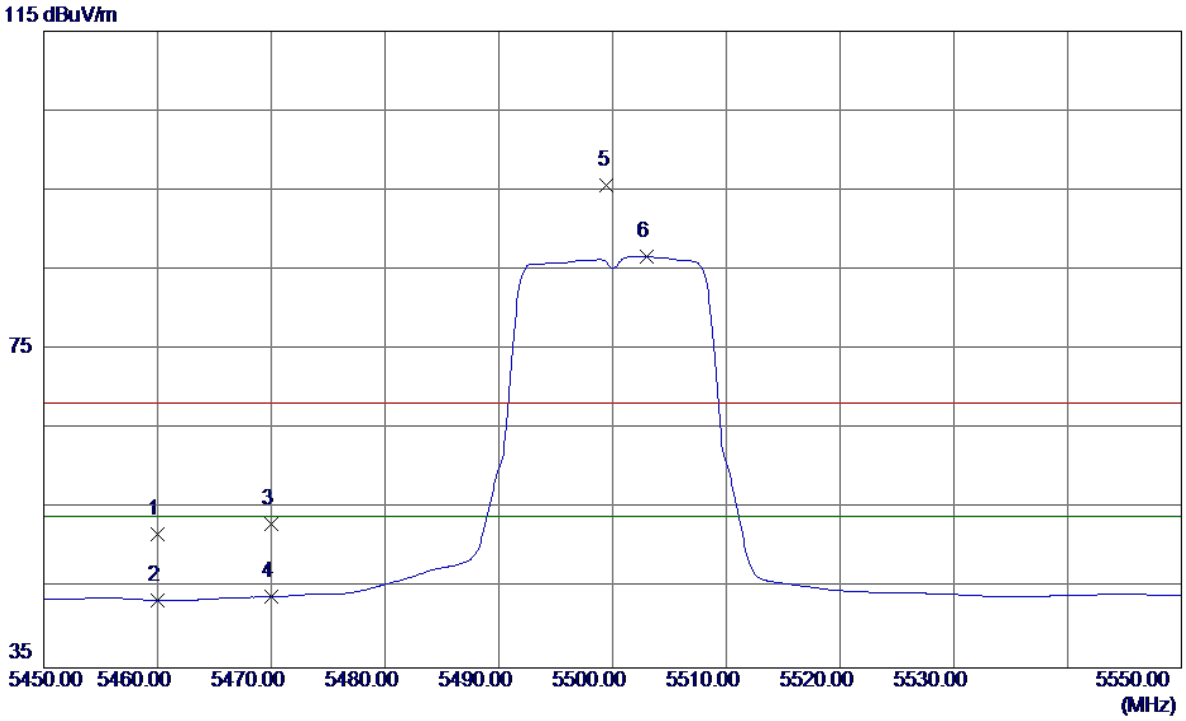


| No. | Freq. | Reading Level | Correct Factor | Measure ment | Limit | Margin | | |
|---|---|---|---|---|---|---|---|---|
| | MHz | dBuV/m | dB | dBuV/m | dBuV/m | dB | Detector | Comment |
| 1 | 5460.0000 | 9.05 | 42.68 | 51.73 | 68.30 | -16.57 | Peak | |
| 2 | 5460.0000 | 0.82 | 42.68 | 43.50 | 54.00 | -10.50 | AVG | |
| 3 | 5470.0000 | 10.40 | 42.73 | 53.13 | 68.30 | -15.17 | Peak | |
| 4 | 5470.0000 | 1.22 | 42.73 | 43.95 | 54.00 | -10.05 | AVG | |
| 5 | 5499.5000 | 52.74 | 42.88 | 95.62 | 68.30 | 27.32 | Peak | No Limit |
| 6 * | 5503.0000 | 43.76 | 42.89 | 86.65 | 54.00 | 32.65 | AVG | No Limit |

| | |
|---|---|
| Orthogonal Axis : | X |
| Test Mode : | UNII-2C/ TX A Mode 5500MHz |


**Vertical**

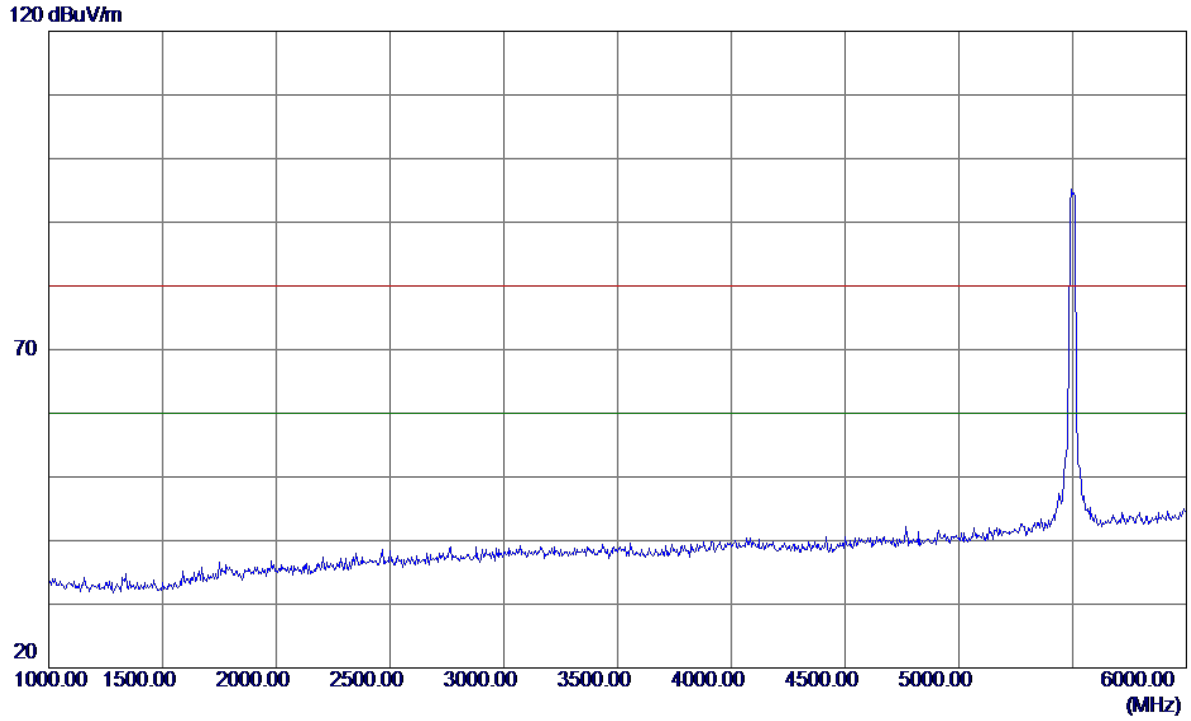


| No. | Freq. | Reading Level | Correct Factor | Measure ment | Limit | Margin | | |
|---|---|---|---|---|---|---|---|---|
| | MHz | dBuV/m | dB | dBuV/m | dBuV/m | dB | Detector | Comment |

| | |
|---|---|
| Orthogonal Axis : | X |
| Test Mode : | UNII-2C/ TX A Mode 5500MHz |


**Vertical**

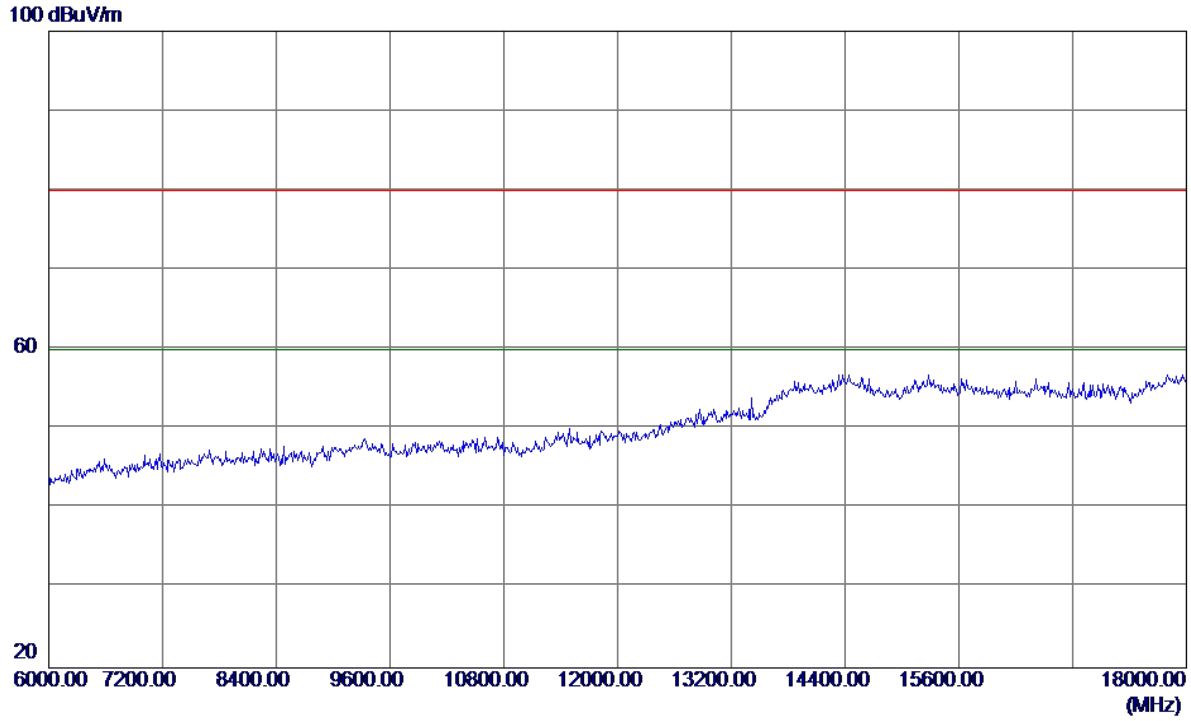


| No. | Freq. | Reading Level | Correct Factor | Measure ment | Limit | Margin | | |
|---|---|---|---|---|---|---|---|---|
| | MHz | dBuV/m | dB | dBuV/m | dBuV/m | dB | Detector | Comment |

| | |
|---|---|
| Orthogonal Axis : | X |
| Test Mode : | UNII-2C/ TX A Mode 5500MHz |


**Vertical**

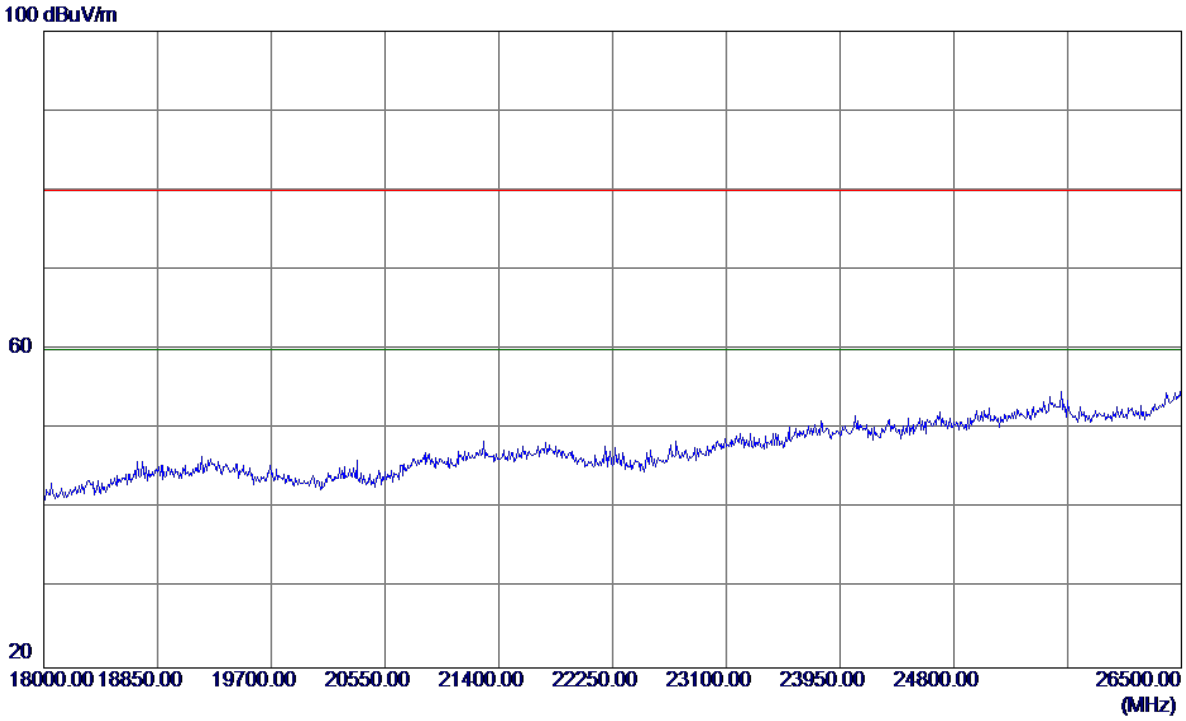


| No. | Freq. | Reading Level | Correct Factor | Measure ment | Limit | Margin | | |
|---|---|---|---|---|---|---|---|---|
| | MHz | dBuV/m | dB | dBuV/m | dBuV/m | dB | Detector | Comment |

| | |
|---|---|
| Orthogonal Axis : | X |
| Test Mode : | UNII-2C/ TX A Mode 5500MHz |


**Vertical**

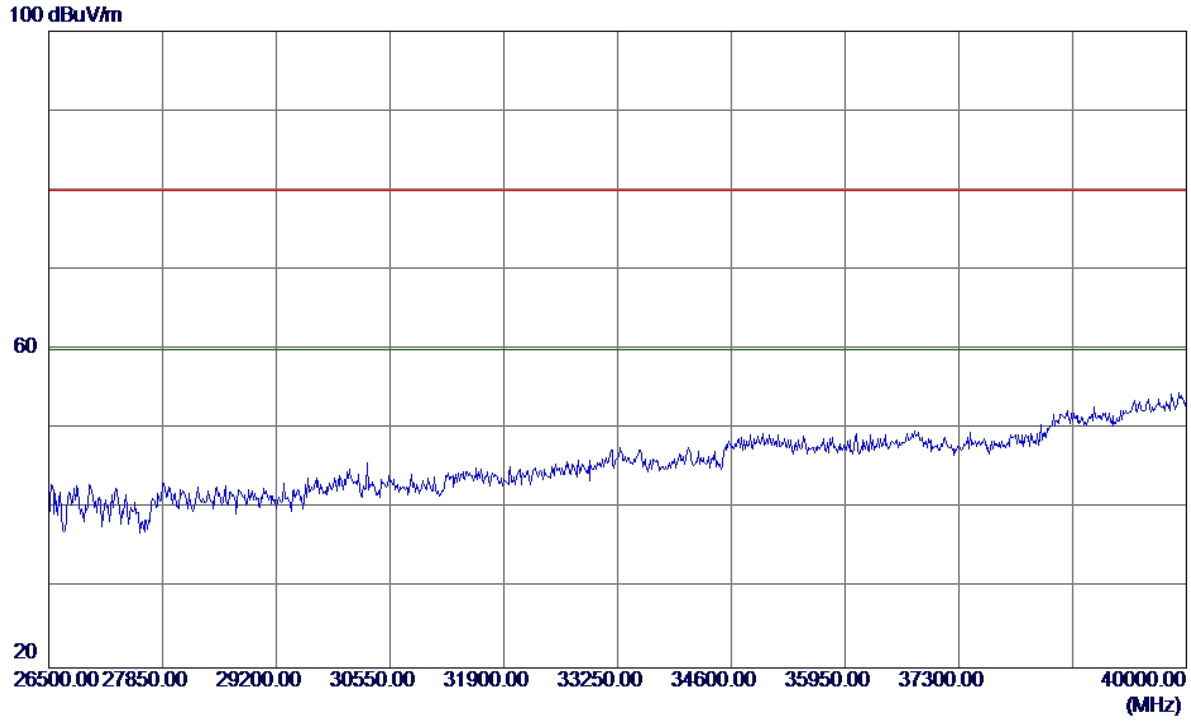


| No. | Freq. | Reading Level | Correct Factor | Measure ment | Limit | Margin | | |
|---|---|---|---|---|---|---|---|---|
| | MHz | dBuV/m | dB | dBuV/m | dBuV/m | dB | Detector | Comment |

| | |
|---|---|
| Orthogonal Axis : | X |
| Test Mode : | UNII-2C/ TX A Mode 5500MHz |


**Horizontal**

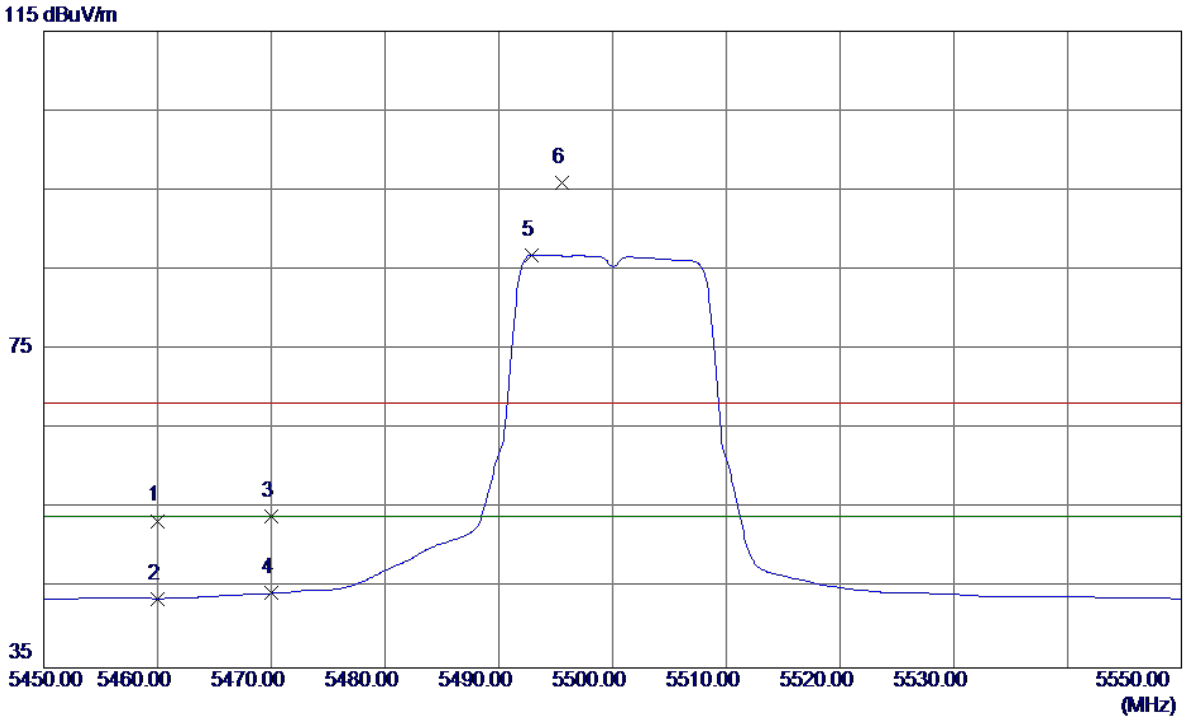


| No. | Freq. | Reading Level | Correct Factor | Measure ment | Limit | Margin | | |
|---|---|---|---|---|---|---|---|---|
| | MHz | dBuV/m | dB | dBuV/m | dBuV/m | dB | Detector | Comment |
| 1 | 5460.0000 | 10.80 | 42.68 | 53.48 | 68.30 | -14.82 | Peak | |
| 2 | 5460.0000 | 1.01 | 42.68 | 43.69 | 54.00 | -10.31 | AVG | |
| 3 | 5470.0000 | 11.24 | 42.73 | 53.97 | 68.30 | -14.33 | Peak | |
| 4 | 5470.0000 | 1.64 | 42.73 | 44.37 | 54.00 | -9.63 | AVG | |
| 5 * | 5492.9000 | 44.01 | 42.84 | 86.85 | 54.00 | 32.85 | AVG | No Limit |
| 6 | 5495.6000 | 53.05 | 42.86 | 95.91 | 68.30 | 27.61 | Peak | No Limit |

| | |
|---|---|
| Orthogonal Axis : | X |
| Test Mode : | UNII-2C/ TX A Mode 5500MHz |


**Horizontal**

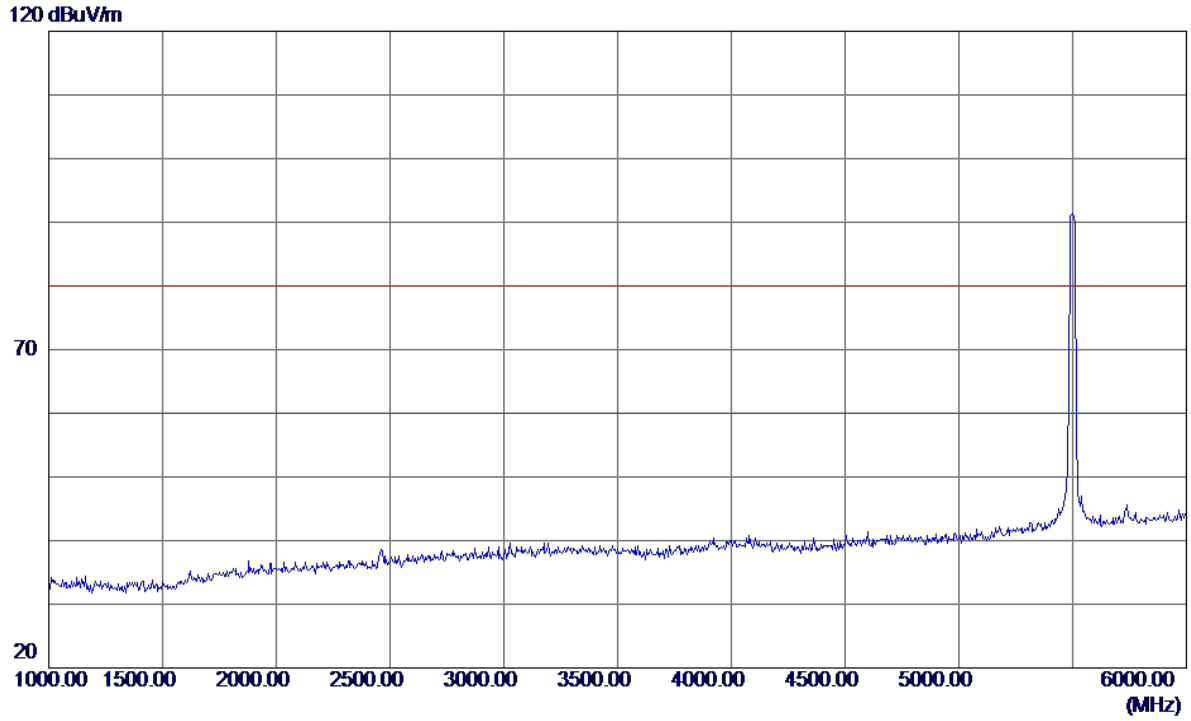


| No. | Freq. | Reading Level | Correct Factor | Measure ment | Limit | Margin | | |
|---|---|---|---|---|---|---|---|---|
| | MHz | dBuV/m | dB | dBuV/m | dBuV/m | dB | Detector | Comment |

| | |
|---|---|
| Orthogonal Axis : | X |
| Test Mode : | UNII-2C/ TX A Mode 5500MHz |


**Horizontal**

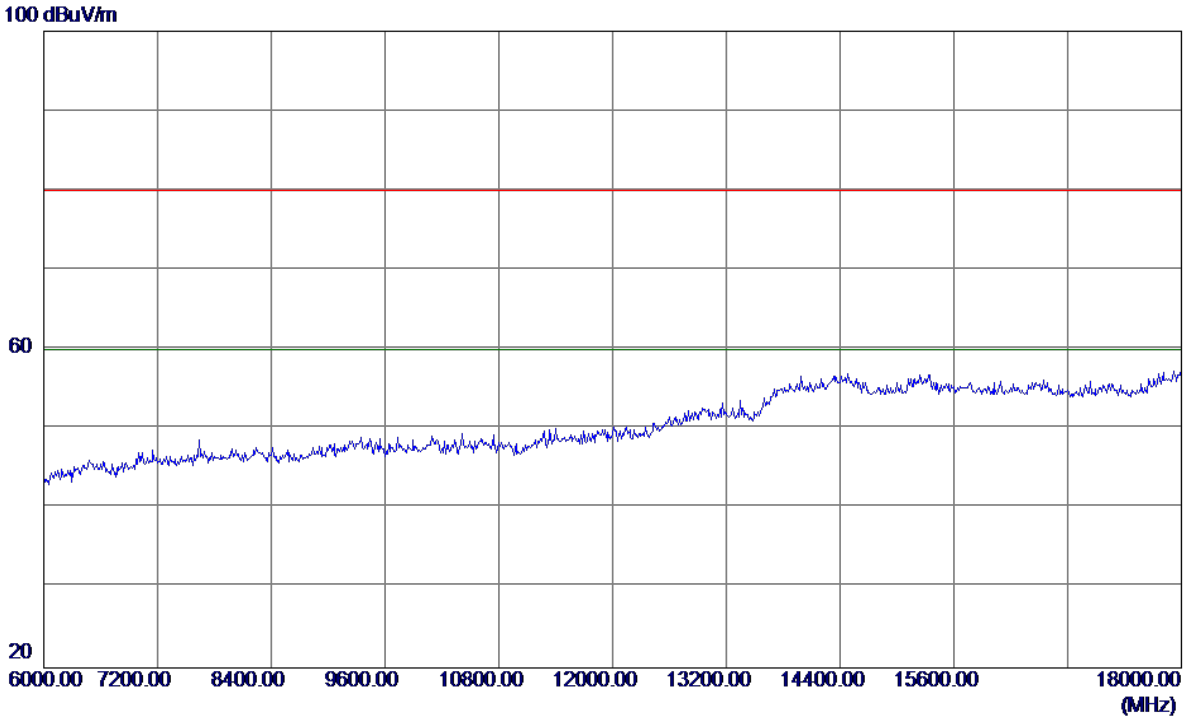


| No. | Freq. | Reading Level | Correct Factor | Measure ment | Limit | Margin | | |
|---|---|---|---|---|---|---|---|---|
| | MHz | dBuV/m | dB | dBuV/m | dBuV/m | dB | Detector | Comment |

| | |
|---|---|
| Orthogonal Axis : | X |
| Test Mode : | UNII-2C/ TX A Mode 5500MHz |


**Horizontal**

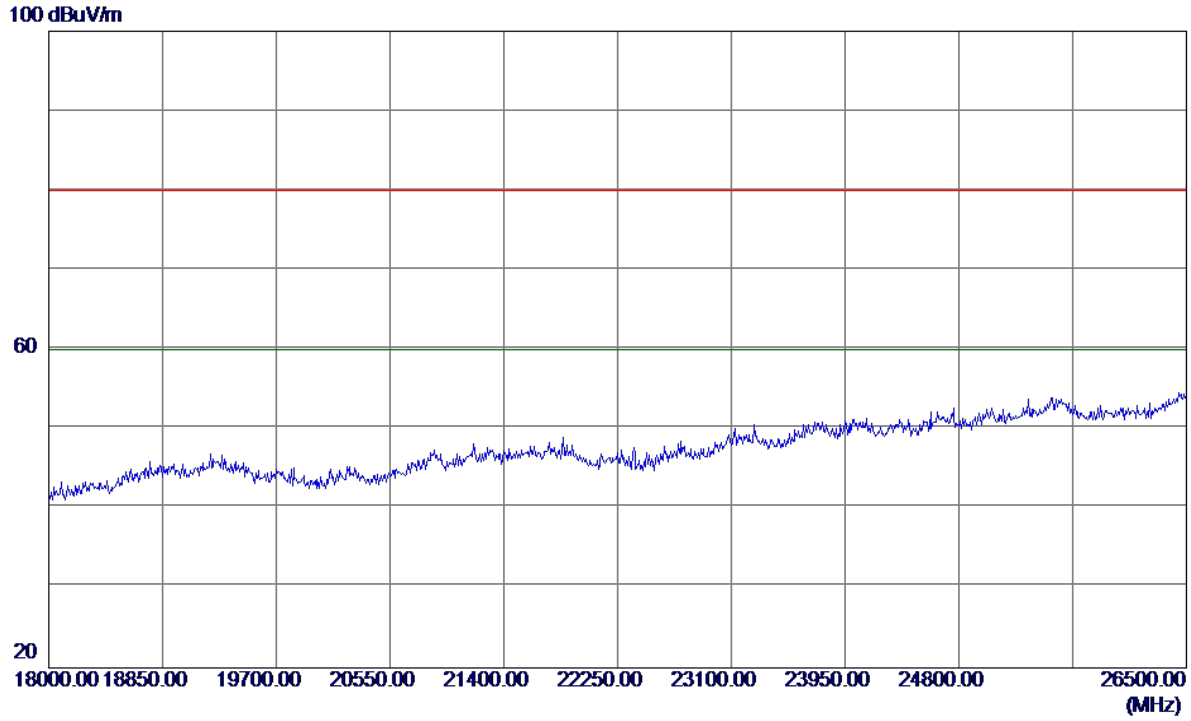


| No. | Freq. | Reading Level | Correct Factor | Measure ment | Limit | Margin | | |
|---|---|---|---|---|---|---|---|---|
| | MHz | dBuV/m | dB | dBuV/m | dBuV/m | dB | Detector | Comment |

| | |
|---|---|
| Orthogonal Axis : | X |
| Test Mode : | UNII-2C/ TX A Mode 5500MHz |


**Horizontal**

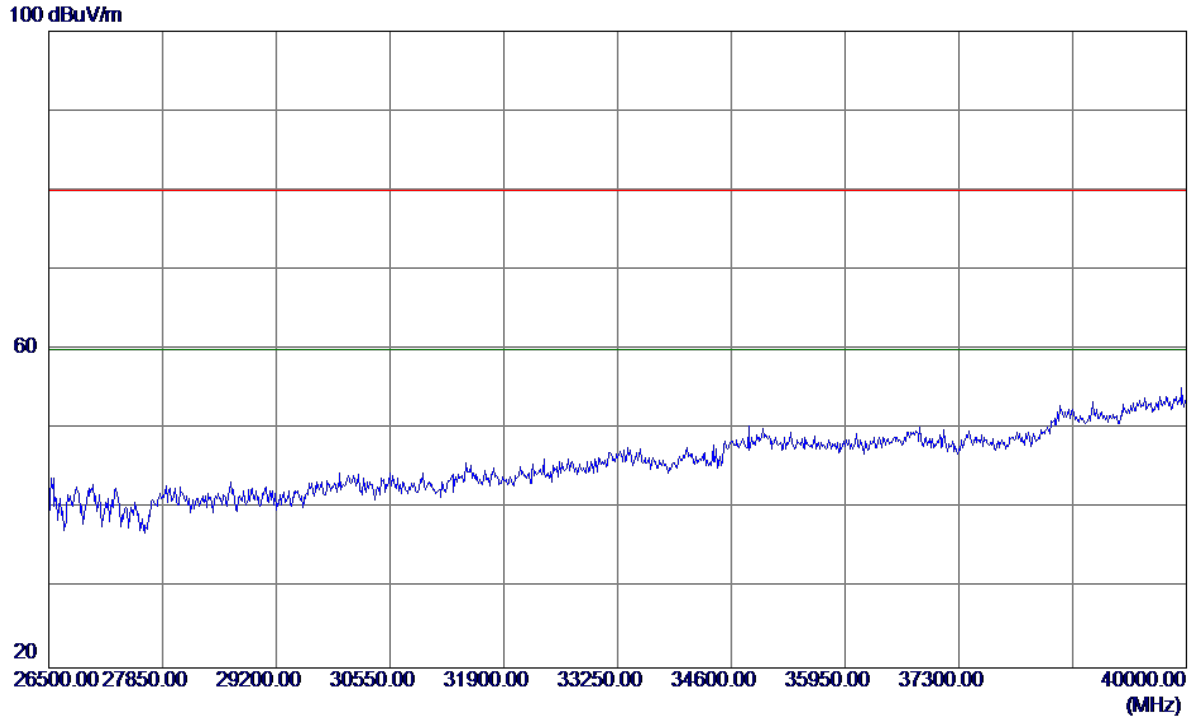


| No. | Freq. | Reading Level | Correct Factor | Measure ment | Limit | Margin | | |
|---|---|---|---|---|---|---|---|---|
| | MHz | dBuV/m | dB | dBuV/m | dBuV/m | dB | Detector | Comment |

| | |
|---|---|
| Orthogonal Axis : | X |
| Test Mode : | UNII-2C/ TX A Mode 5700MHz |


**Vertical**

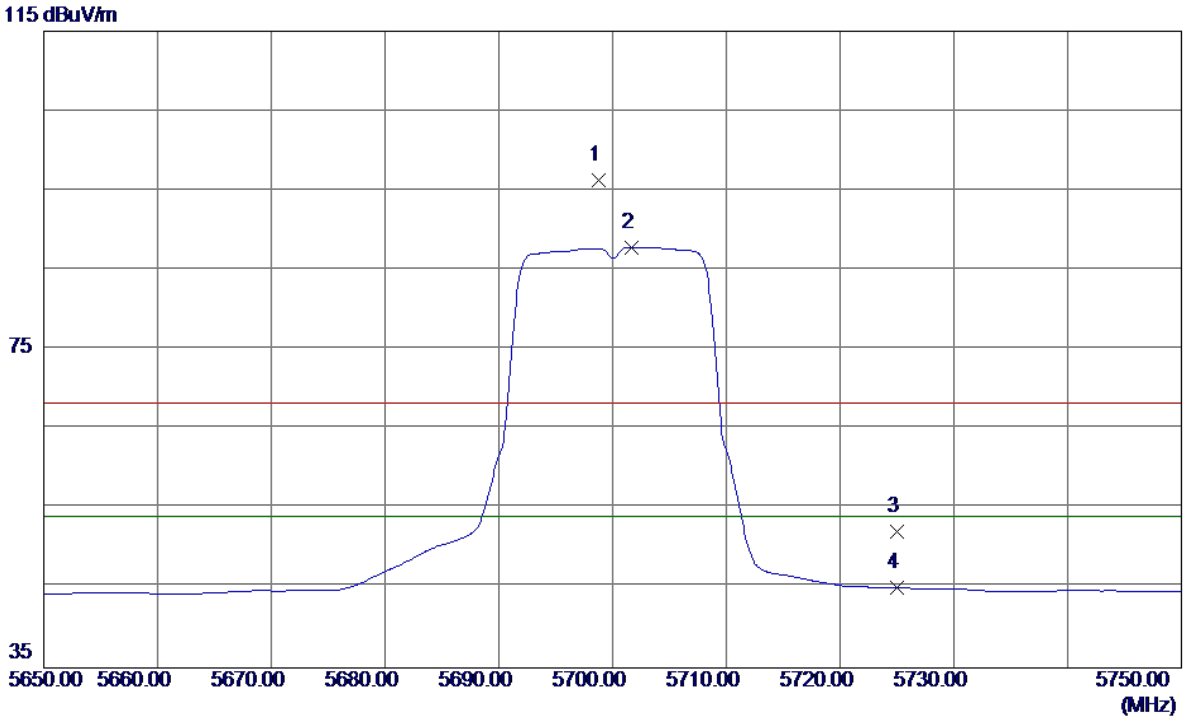


| No. | Freq. | Reading Level | Correct Factor | Measure ment | Limit | Margin | | |
|---|---|---|---|---|---|---|---|---|
| | MHz | dBuV/m | dB | dBuV/m | dBuV/m | dB | Detector | Comment |
| 1 | 5698.8000 | 52.74 | 43.48 | 96.22 | 68.30 | 27.92 | Peak | No Limit |
| 2 * | 5701.7000 | 44.37 | 43.49 | 87.86 | 54.00 | 33.86 | AVG | No Limit |
| 3 | 5725.0000 | 8.59 | 43.56 | 52.15 | 68.30 | -16.15 | Peak | |
| 4 | 5725.0000 | 1.47 | 43.56 | 45.03 | 54.00 | -8.97 | AVG | |

| | |
|---|---|
| Orthogonal Axis : | X |
| Test Mode : | UNII-2C/ TX A Mode 5700MHz |


**Vertical**

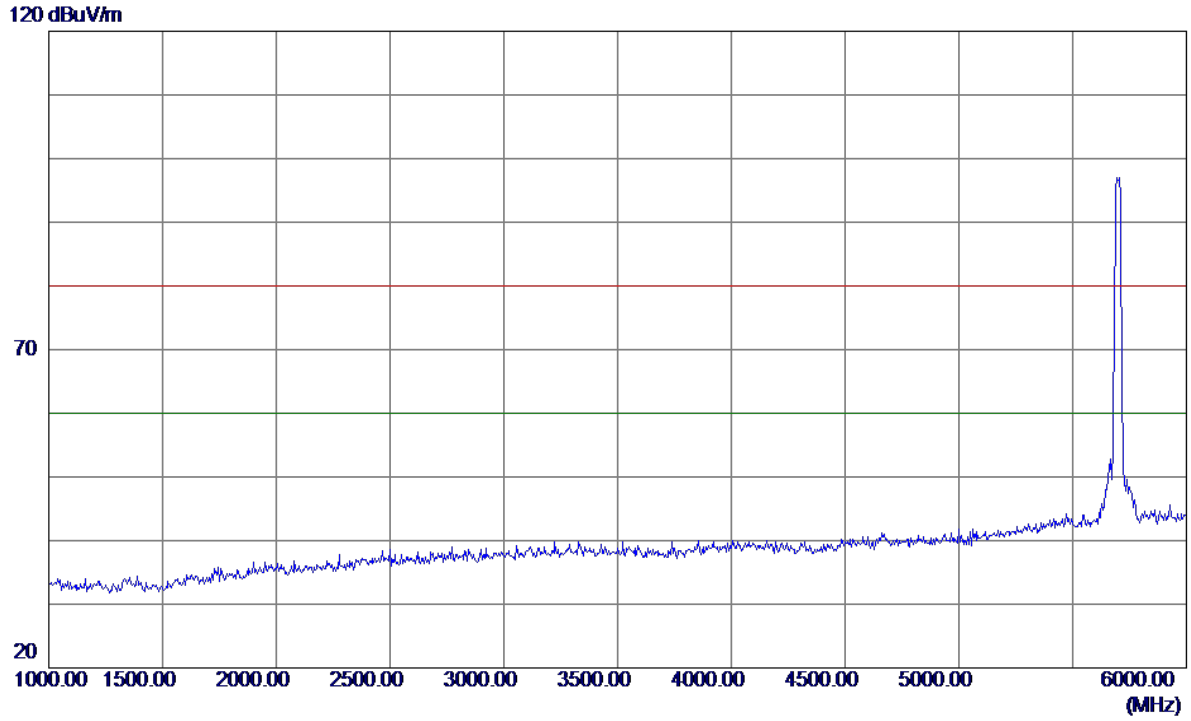


| No. | Freq. | Reading Level | Correct Factor | Measure ment | Limit | Margin | | |
|---|---|---|---|---|---|---|---|---|
| | MHz | dBuV/m | dB | dBuV/m | dBuV/m | dB | Detector | Comment |

| | |
|---|---|
| Orthogonal Axis : | X |
| Test Mode : | UNII-2C/ TX A Mode 5700MHz |


**Vertical**

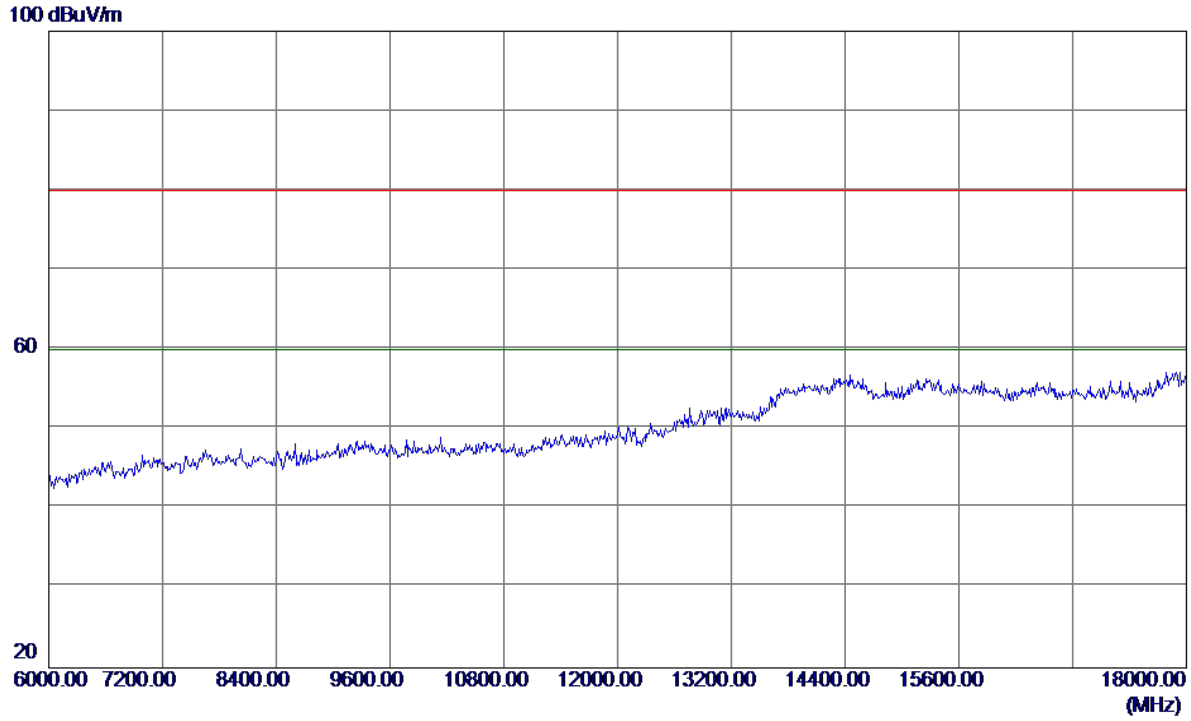


| No. | Freq. | Reading Level | Correct Factor | Measure ment | Limit | Margin | | |
|---|---|---|---|---|---|---|---|---|
| | MHz | dBuV/m | dB | dBuV/m | dBuV/m | dB | Detector | Comment |

| | |
|---|---|
| Orthogonal Axis : | X |
| Test Mode : | UNII-2C/ TX A Mode 5700MHz |


**Vertical**

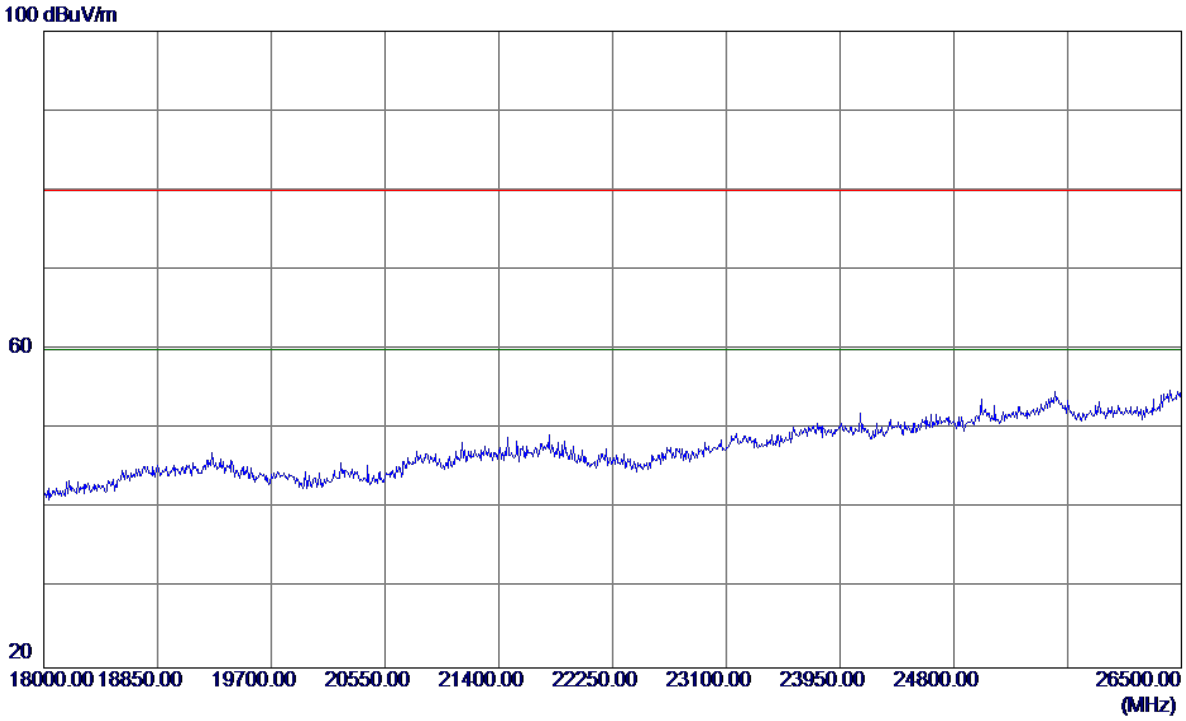


| No. | Freq. | Reading Level | Correct Factor | Measure ment | Limit | Margin | | |
|---|---|---|---|---|---|---|---|---|
| | MHz | dBuV/m | dB | dBuV/m | dBuV/m | dB | Detector | Comment |

| | |
|---|---|
| Orthogonal Axis : | X |
| Test Mode : | UNII-2C/ TX A Mode 5700MHz |


**Vertical**

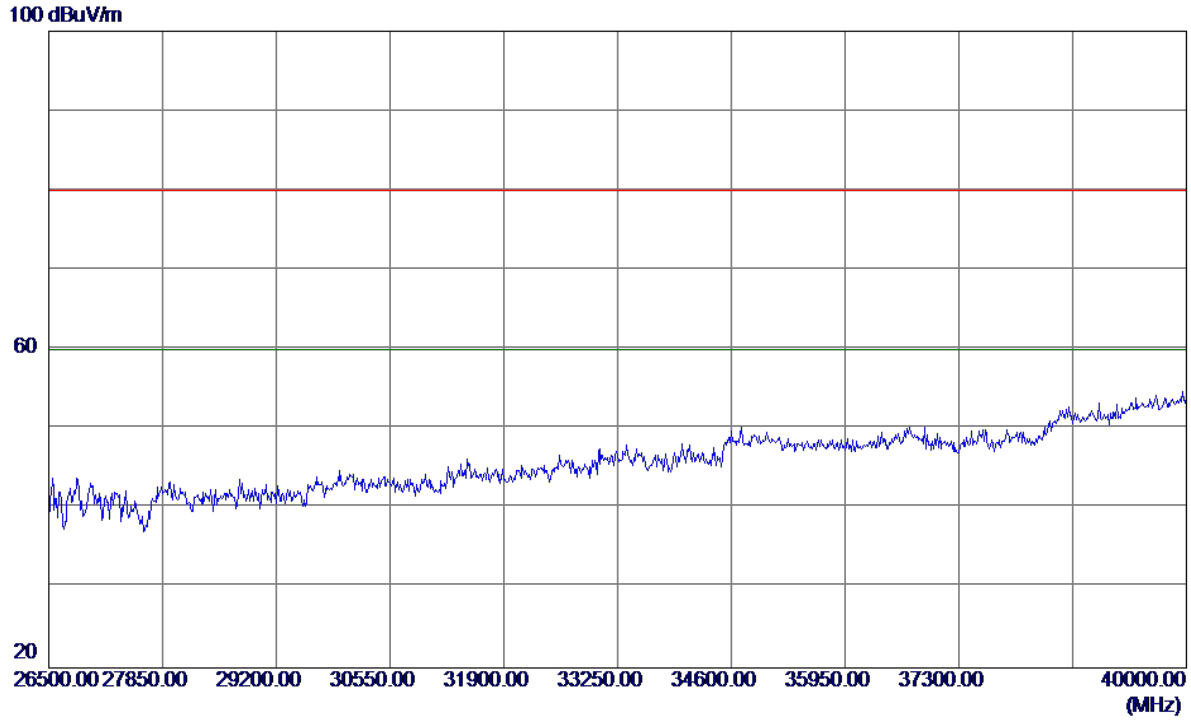


| No. | Freq. | Reading Level | Correct Factor | Measure ment | Limit | Margin | | |
|---|---|---|---|---|---|---|---|---|
| | MHz | dBuV/m | dB | dBuV/m | dBuV/m | dB | Detector | Comment |

| | |
|---|---|
| Orthogonal Axis : | X |
| Test Mode : | UNII-2C/ TX A Mode 5700MHz |


**Horizontal**

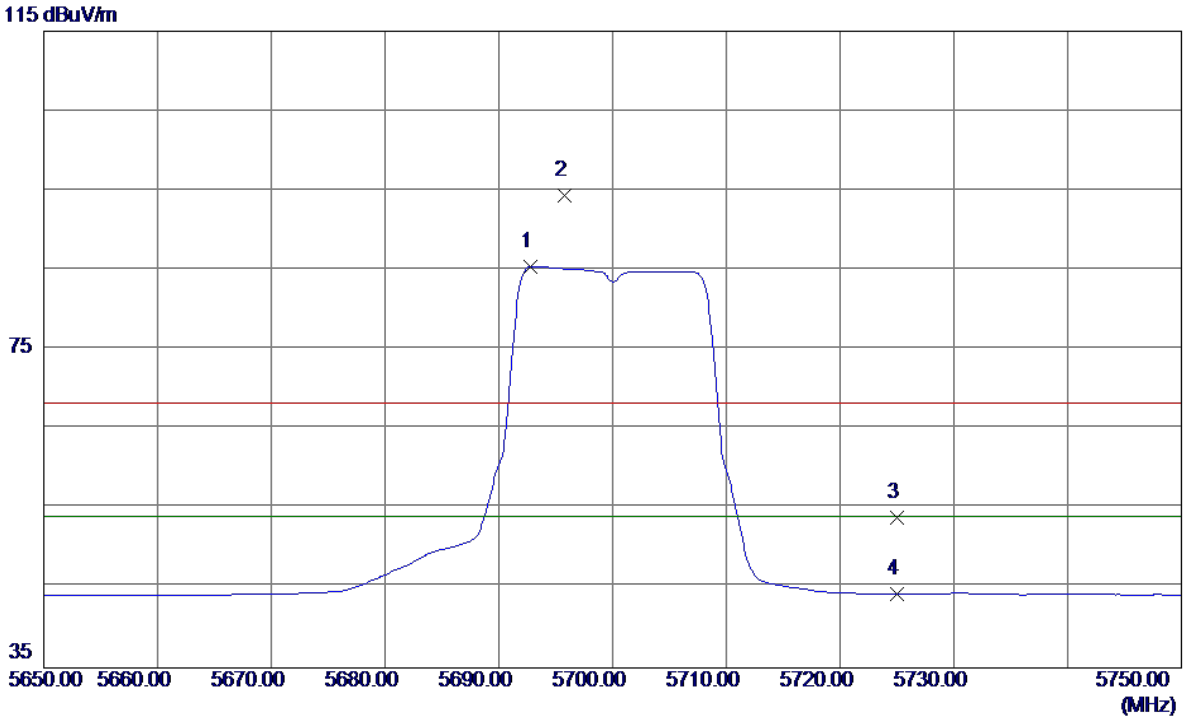


| No. | Freq. | Reading Level | Correct Factor | Measure ment | Limit | Margin | | |
|---|---|---|---|---|---|---|---|---|
| | MHz | dBuV/m | dB | dBuV/m | dBuV/m | dB | Detector | Comment |
| 1 * | 5692.8000 | 41.95 | 43.46 | 85.41 | 54.00 | 31.41 | AVG | No Limit |
| 2 | 5695.8000 | 50.95 | 43.47 | 94.42 | 68.30 | 26.12 | Peak | No Limit |
| 3 | 5725.0000 | 10.29 | 43.56 | 53.85 | 68.30 | -14.45 | Peak | |
| 4 | 5725.0000 | 0.74 | 43.56 | 44.30 | 54.00 | -9.70 | AVG | |

| | |
|---|---|
| Orthogonal Axis : | X |
| Test Mode : | UNII-2C/ TX A Mode 5700MHz |


**Horizontal**

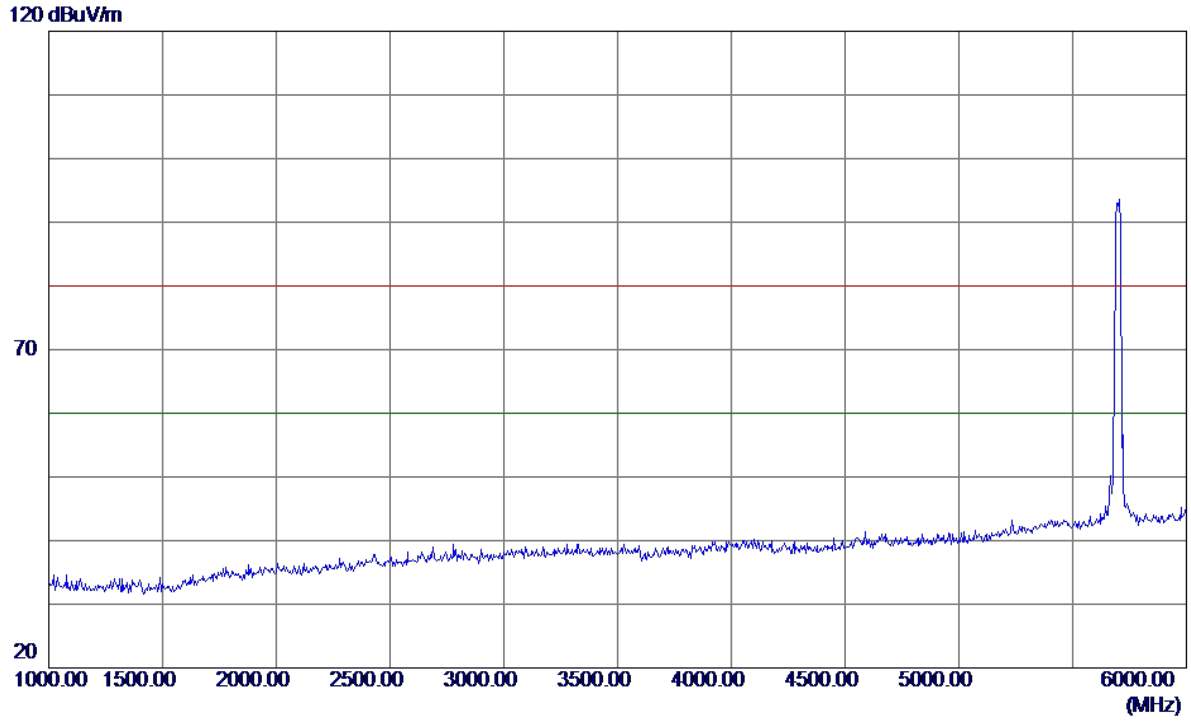


| No. | Freq. | Reading Level | Correct Factor | Measure ment | Limit | Margin | | |
|---|---|---|---|---|---|---|---|---|
| | MHz | dBuV/m | dB | dBuV/m | dBuV/m | dB | Detector | Comment |

| | |
|---|---|
| Orthogonal Axis : | X |
| Test Mode : | UNII-2C/ TX A Mode 5700MHz |


**Horizontal**

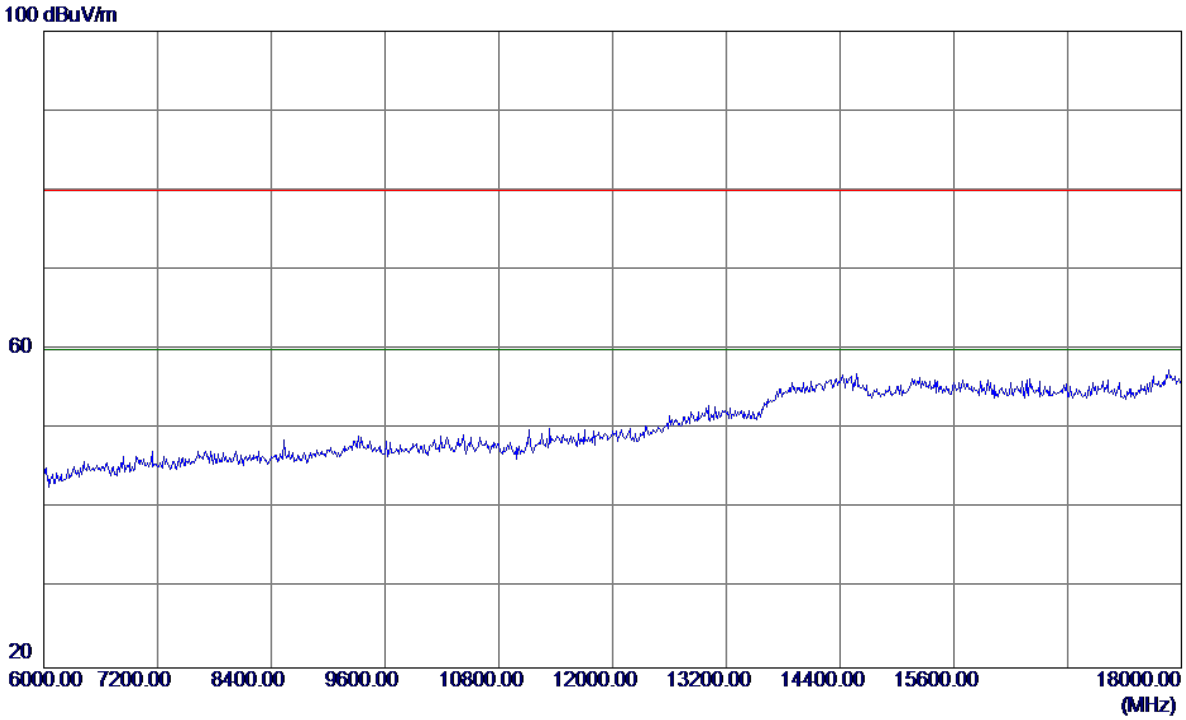


| No. | Freq. | Reading Level | Correct Factor | Measure ment | Limit | Margin | | |
|---|---|---|---|---|---|---|---|---|
| | MHz | dBuV/m | dB | dBuV/m | dBuV/m | dB | Detector | Comment |

| | |
|---|---|
| Orthogonal Axis : | X |
| Test Mode : | UNII-2C/ TX A Mode 5700MHz |


**Horizontal**

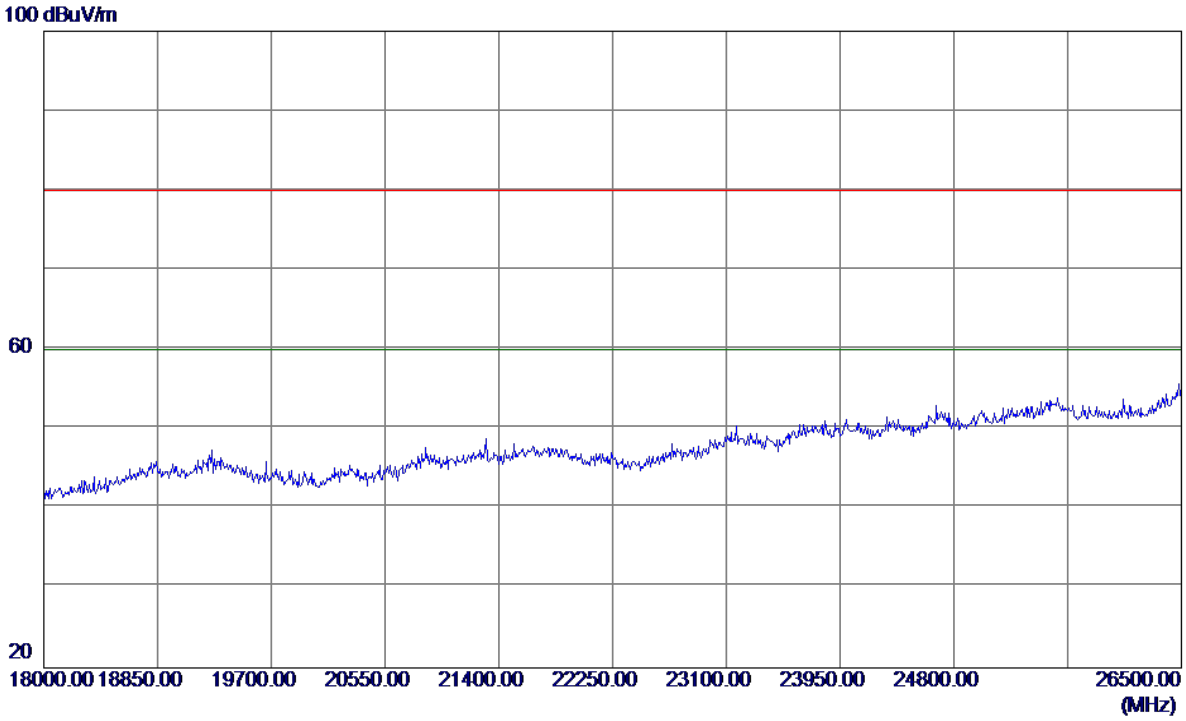


| No. | Freq. | Reading Level | Correct Factor | Measure ment | Limit | Margin | | |
|---|---|---|---|---|---|---|---|---|
| | MHz | dBuV/m | dB | dBuV/m | dBuV/m | dB | Detector | Comment |

| | |
|---|---|
| Orthogonal Axis : | X |
| Test Mode : | UNII-2C/ TX A Mode 5700MHz |


**Horizontal**

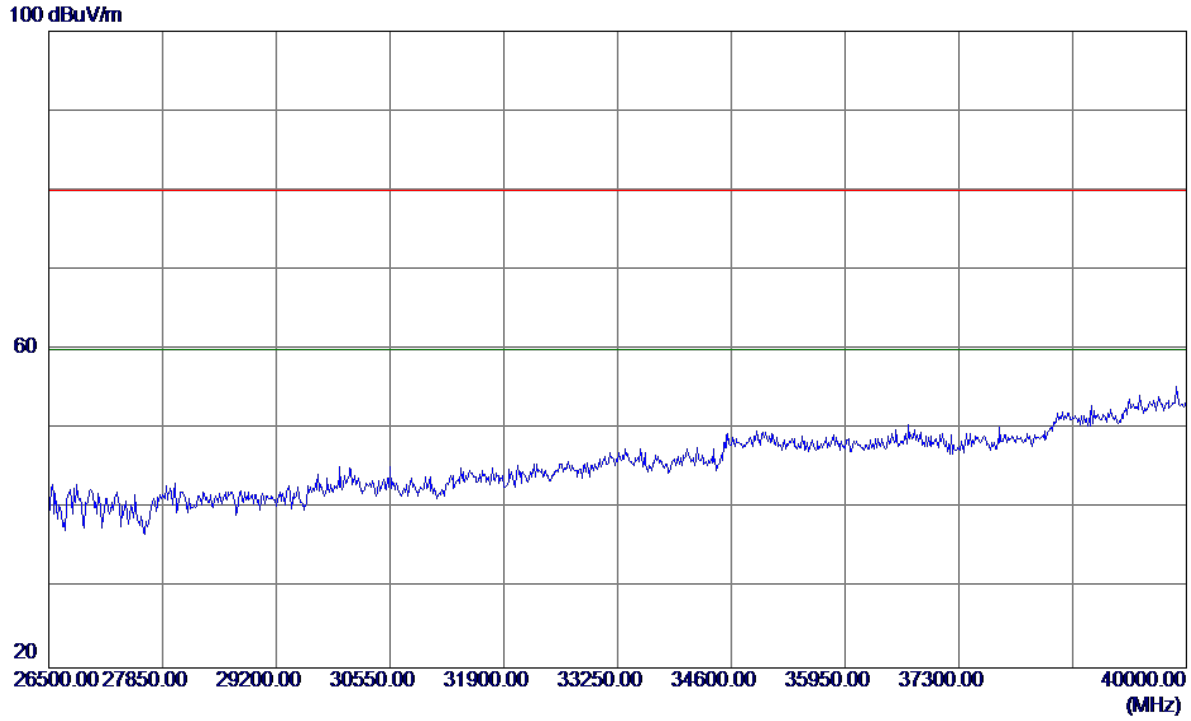


| No. | Freq. | Reading Level | Correct Factor | Measure ment | Limit | Margin | | |
|---|---|---|---|---|---|---|---|---|
| | MHz | dBuV/m | dB | dBuV/m | dBuV/m | dB | Detector | Comment |

| | |
|---|---|
| Orthogonal Axis : | X |
| Test Mode : | UNII-2C/ TX N20 Mode 5500MHz |


**Vertical**

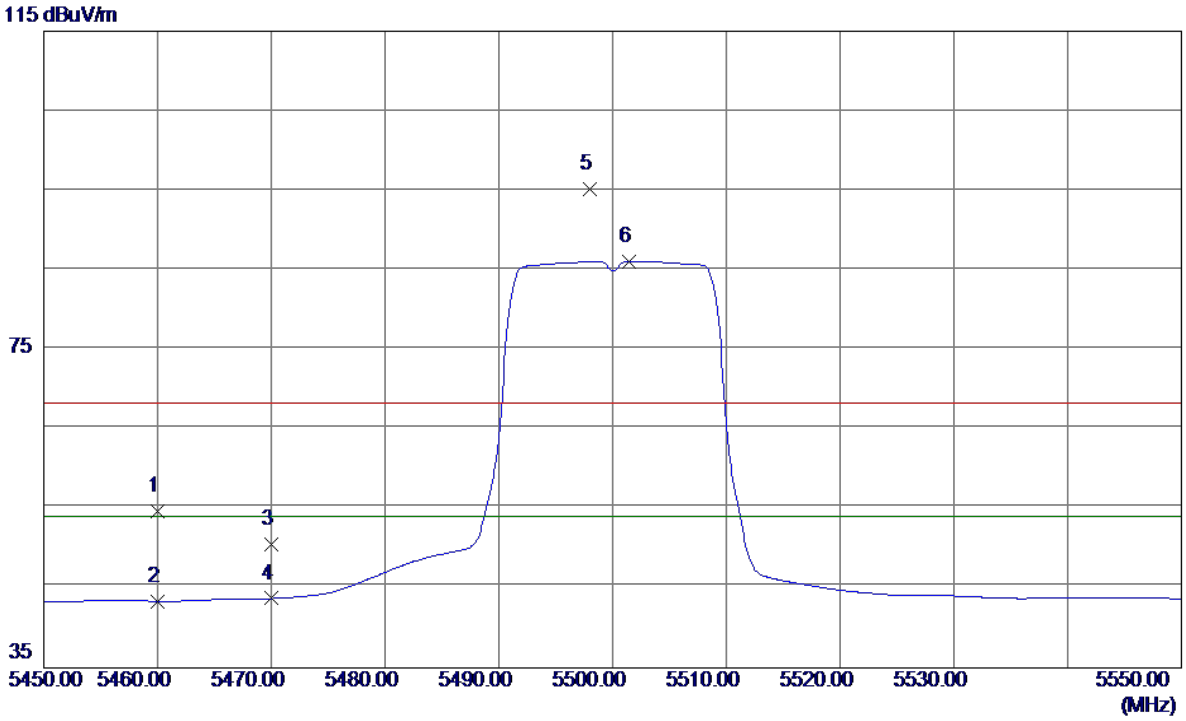


| No. | Freq. | Reading Level | Correct Factor | Measure ment | Limit | Margin | | |
|---|---|---|---|---|---|---|---|---|
| | MHz | dBuV/m | dB | dBuV/m | dBuV/m | dB | Detector | Comment |
| 1 | 5460.0000 | 11.97 | 42.68 | 54.65 | 68.30 | -13.65 | Peak | |
| 2 | 5460.0000 | 0.69 | 42.68 | 43.37 | 54.00 | -10.63 | AVG | |
| 3 | 5470.0000 | 7.74 | 42.73 | 50.47 | 68.30 | -17.83 | Peak | |
| 4 | 5470.0000 | 0.99 | 42.73 | 43.72 | 54.00 | -10.28 | AVG | |
| 5 | 5498.0000 | 52.33 | 42.87 | 95.20 | 68.30 | 26.90 | Peak | No Limit |
| 6 * | 5501.4000 | 43.21 | 42.88 | 86.09 | 54.00 | 32.09 | AVG | No Limit |

| | |
|---|---|
| Orthogonal Axis : | X |
| Test Mode : | UNII-2C/ TX N20 Mode 5500MHz |


**Vertical**

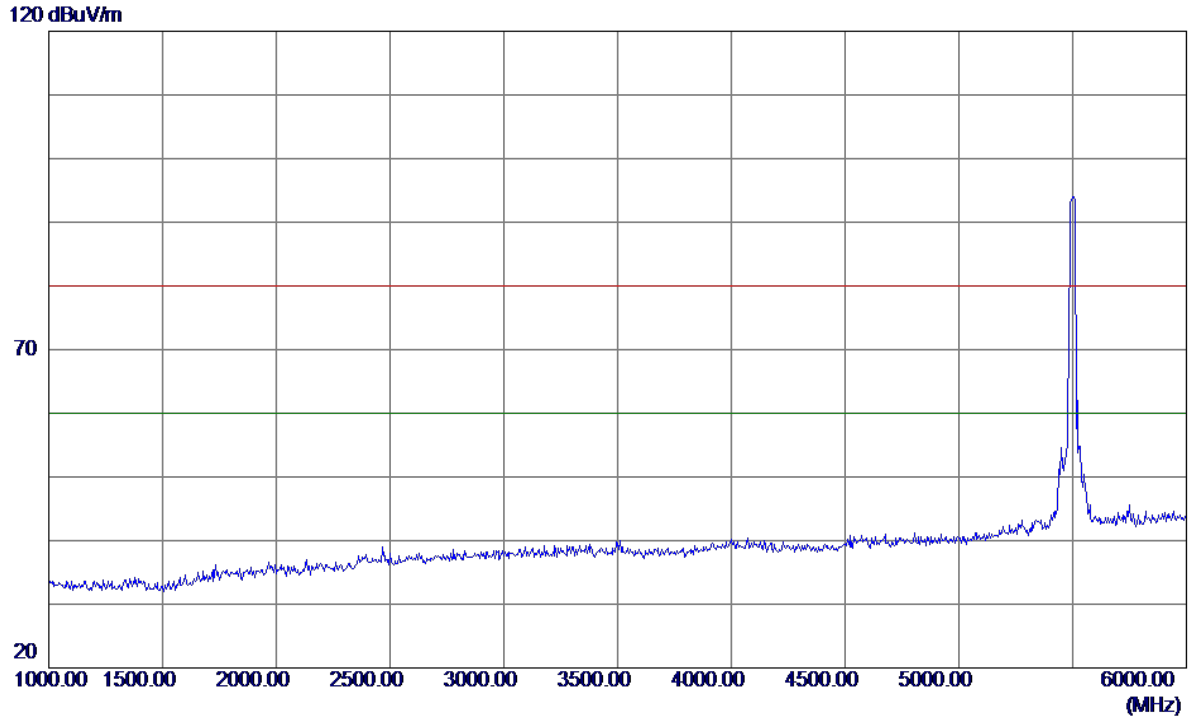


| No. | Freq. | Reading Level | Correct Factor | Measure ment | Limit | Margin | | |
|---|---|---|---|---|---|---|---|---|
| | MHz | dBuV/m | dB | dBuV/m | dBuV/m | dB | Detector | Comment |

| | |
|---|---|
| Orthogonal Axis : | X |
| Test Mode : | UNII-2C/ TX N20 Mode 5500MHz |


**Vertical**

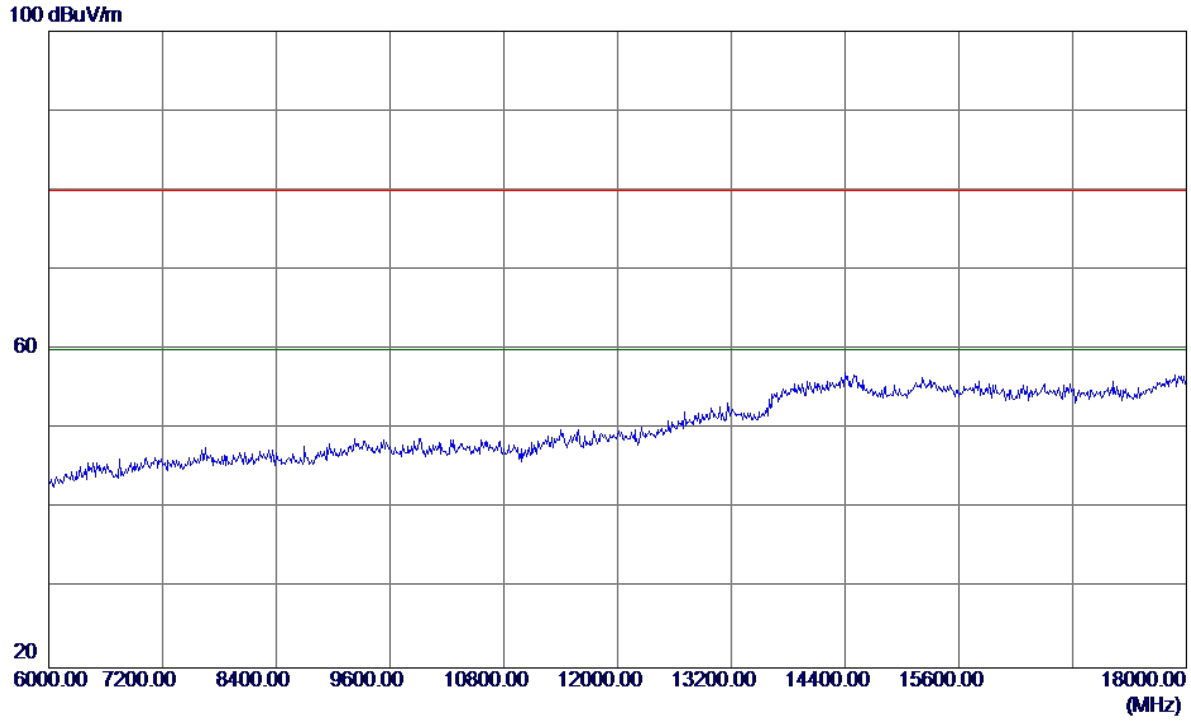


| No. | Freq. | Reading Level | Correct Factor | Measure ment | Limit | Margin | | |
|---|---|---|---|---|---|---|---|---|
| | MHz | dBuV/m | dB | dBuV/m | dBuV/m | dB | Detector | Comment |

| | |
|---|---|
| Orthogonal Axis : | X |
| Test Mode : | UNII-2C/ TX N20 Mode 5500MHz |


**Vertical**

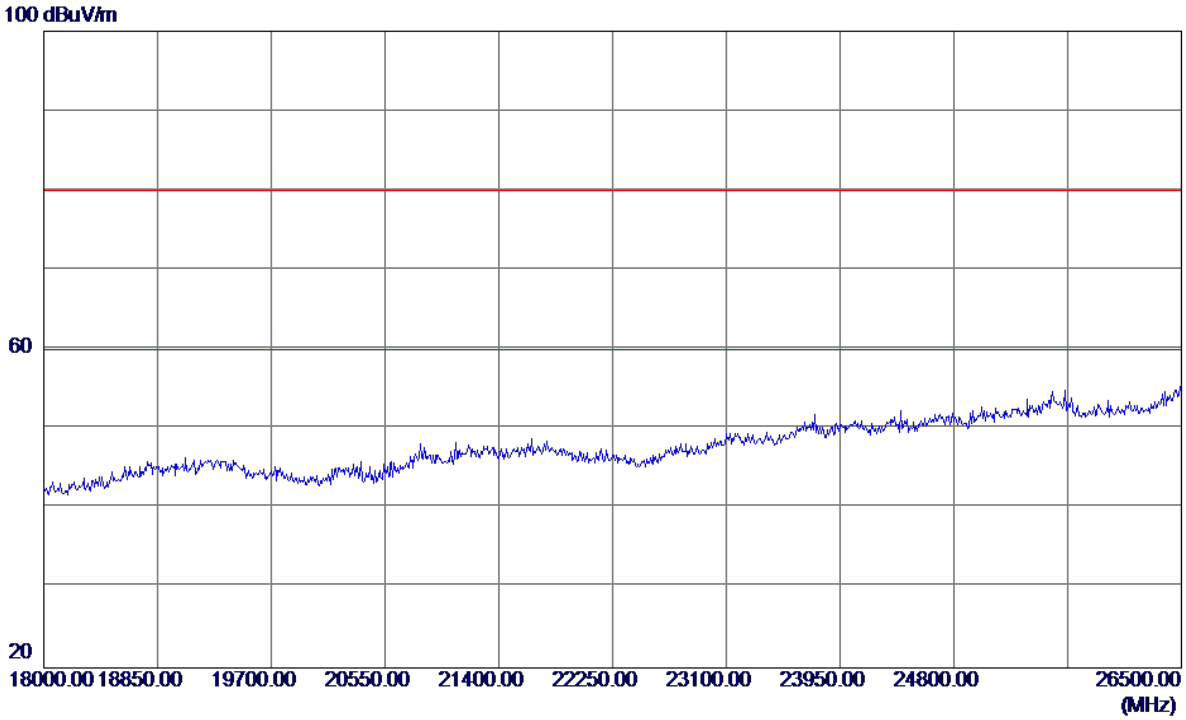


| No. | Freq. | Reading Level | Correct Factor | Measure ment | Limit | Margin | | |
|---|---|---|---|---|---|---|---|---|
| | MHz | dBuV/m | dB | dBuV/m | dBuV/m | dB | Detector | Comment |

| | |
|---|---|
| Orthogonal Axis : | X |
| Test Mode : | UNII-2C/ TX N20 Mode 5500MHz |


**Vertical**

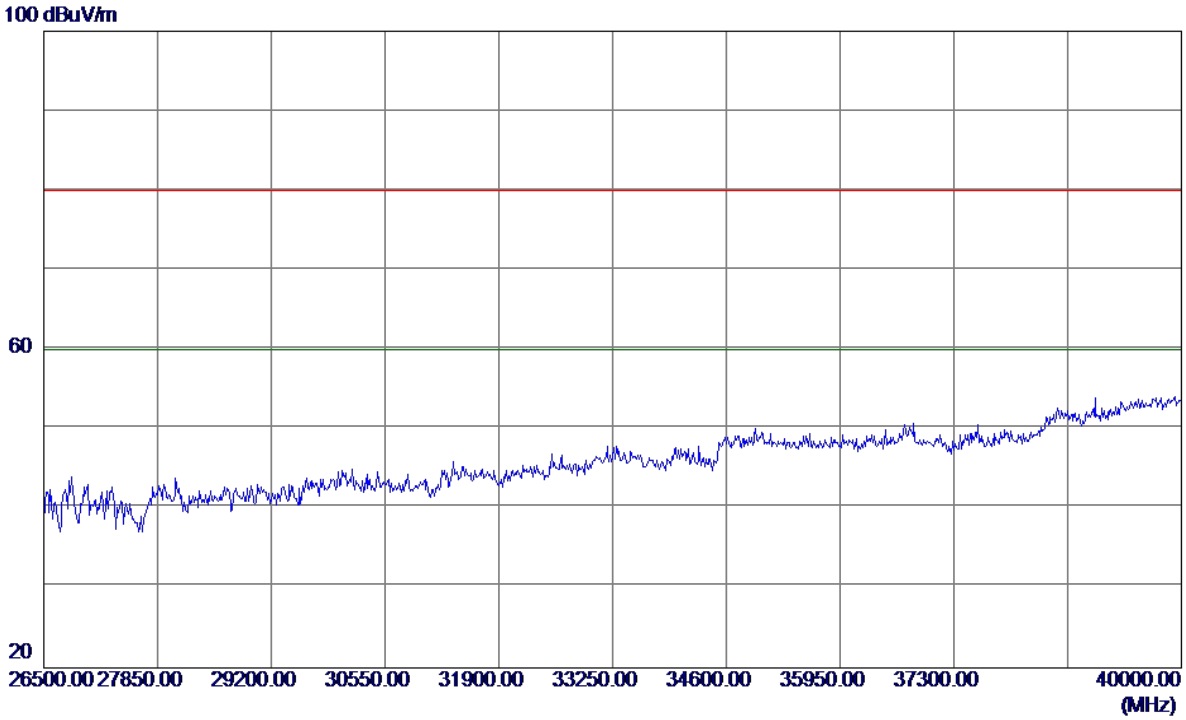


| No. | Freq. | Reading Level | Correct Factor | Measure ment | Limit | Margin | | |
|---|---|---|---|---|---|---|---|---|
| | MHz | dBuV/m | dB | dBuV/m | dBuV/m | dB | Detector | Comment |

| | |
|---|---|
| Orthogonal Axis : | X |
| Test Mode : | UNII-2C/ TX N20 Mode 5500MHz |


**Horizontal**

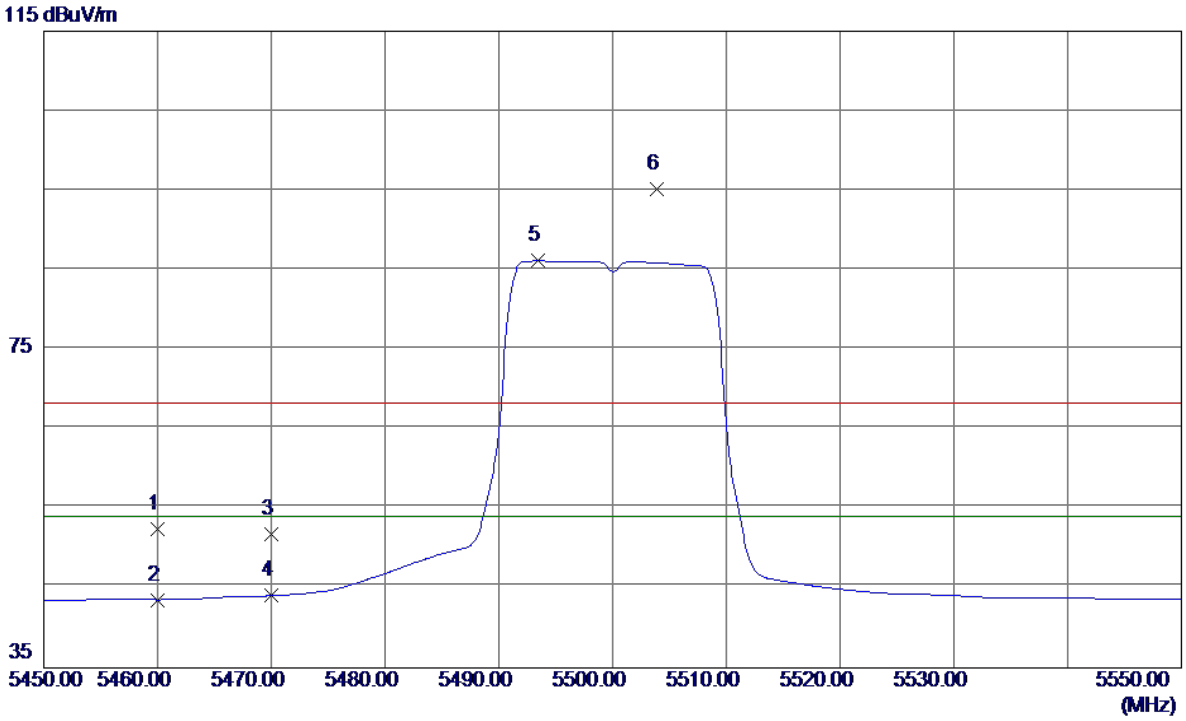


| No. | Freq. | Reading Level | Correct Factor | Measure ment | Limit | Margin | | |
|---|---|---|---|---|---|---|---|---|
| | MHz | dBuV/m | dB | dBuV/m | dBuV/m | dB | Detector | Comment |
| 1 | 5460.0000 | 9.74 | 42.68 | 52.42 | 68.30 | -15.88 | Peak | |
| 2 | 5460.0000 | 0.87 | 42.68 | 43.55 | 54.00 | -10.45 | AVG | |
| 3 | 5470.0000 | 9.01 | 42.73 | 51.74 | 68.30 | -16.56 | Peak | |
| 4 | 5470.0000 | 1.35 | 42.73 | 44.08 | 54.00 | -9.92 | AVG | |
| 5 * | 5493.4000 | 43.28 | 42.85 | 86.13 | 54.00 | 32.13 | AVG | No Limit |
| 6 | 5503.9000 | 52.29 | 42.89 | 95.18 | 68.30 | 26.88 | Peak | No Limit |

| | |
|---|---|
| Orthogonal Axis : | X |
| Test Mode : | UNII-2C/ TX N20 Mode 5500MHz |


**Horizontal**

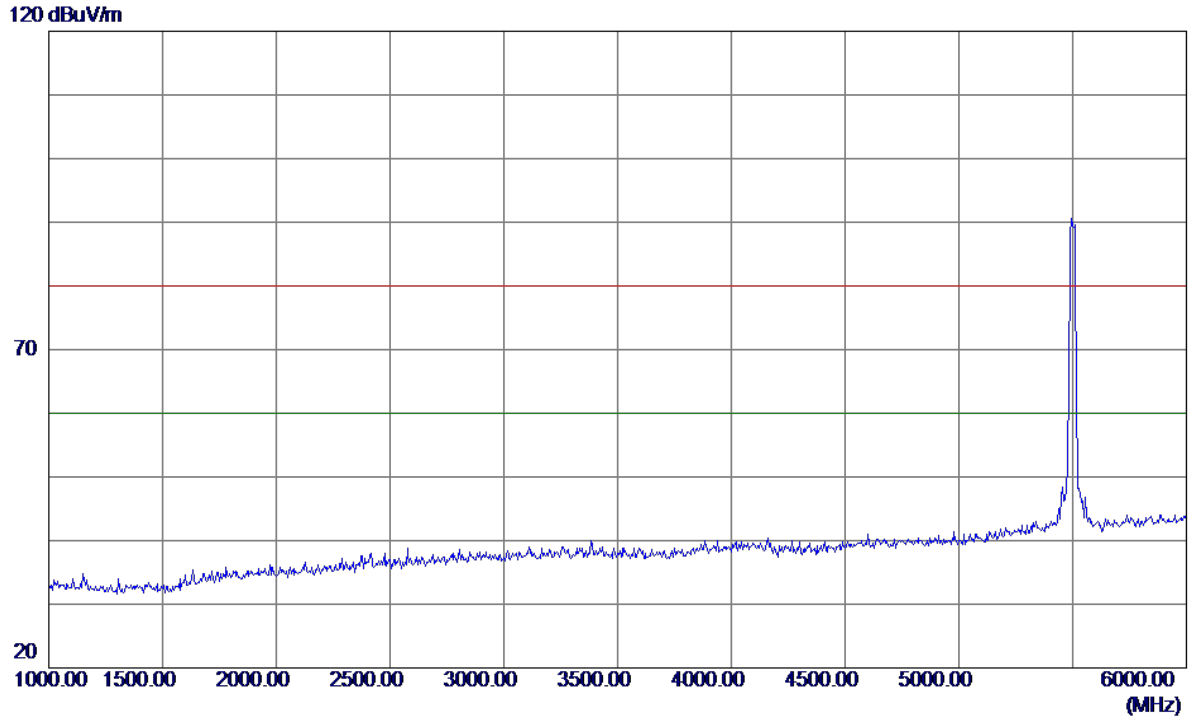


| No. | Freq. | Reading Level | Correct Factor | Measure ment | Limit | Margin | | |
|---|---|---|---|---|---|---|---|---|
| | MHz | dBuV/m | dB | dBuV/m | dBuV/m | dB | Detector | Comment |

| | |
|---|---|
| Orthogonal Axis : | X |
| Test Mode : | UNII-2C/ TX N20 Mode 5500MHz |


**Horizontal**

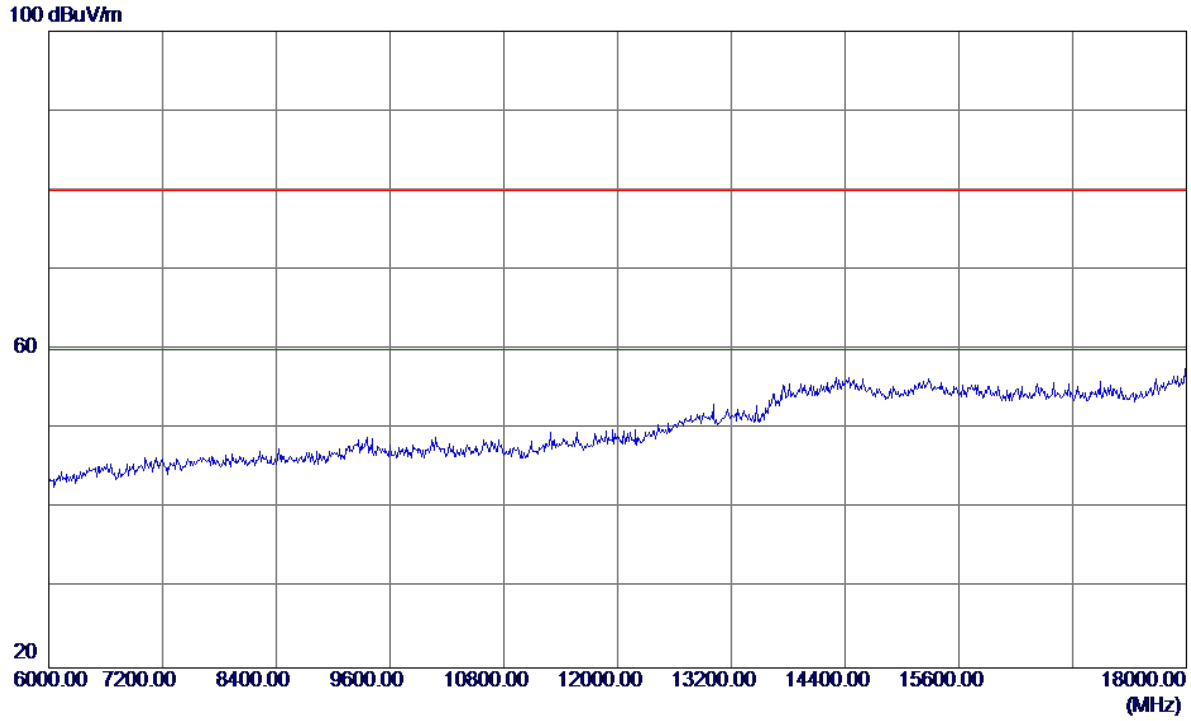


| No. | Freq. | Reading Level | Correct Factor | Measure ment | Limit | Margin | | |
|---|---|---|---|---|---|---|---|---|
| | MHz | dBuV/m | dB | dBuV/m | dBuV/m | dB | Detector | Comment |

| | |
|---|---|
| Orthogonal Axis : | X |
| Test Mode : | UNII-2C/ TX N20 Mode 5500MHz |


**Horizontal**

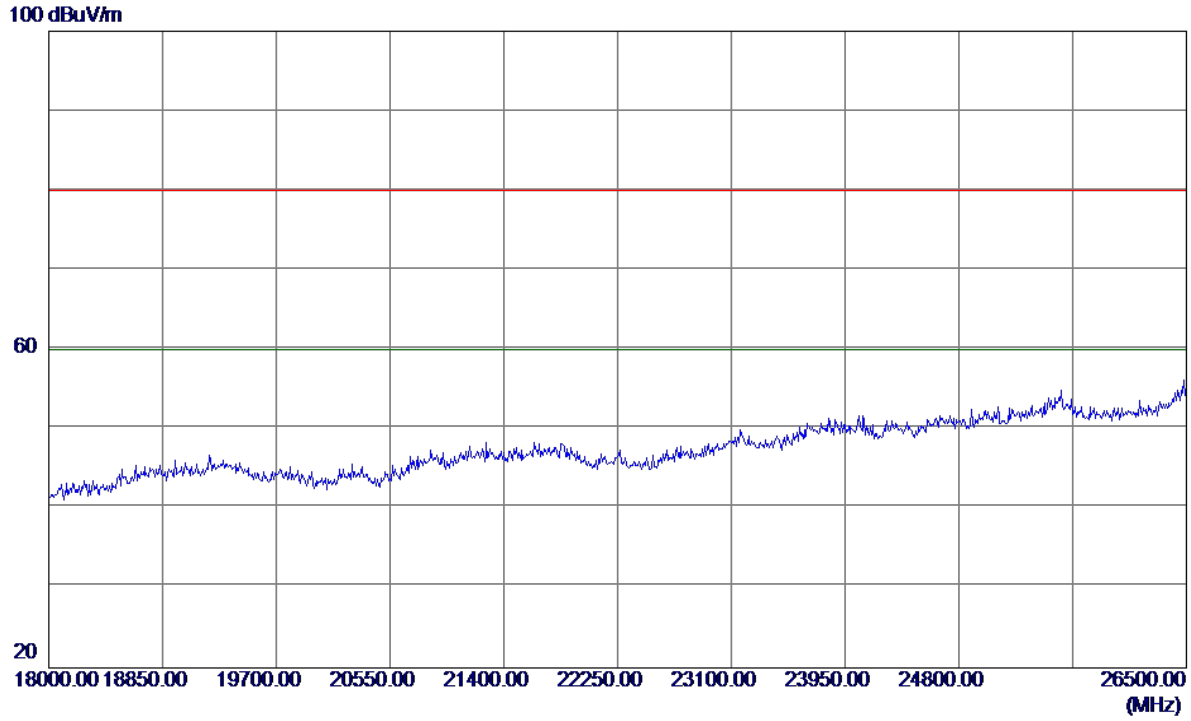


| No. | Freq. | Reading Level | Correct Factor | Measure ment | Limit | Margin | | |
|---|---|---|---|---|---|---|---|---|
| | MHz | dBuV/m | dB | dBuV/m | dBuV/m | dB | Detector | Comment |

| | |
|---|---|
| Orthogonal Axis : | X |
| Test Mode : | UNII-2C/ TX N20 Mode 5500MHz |


**Horizontal**

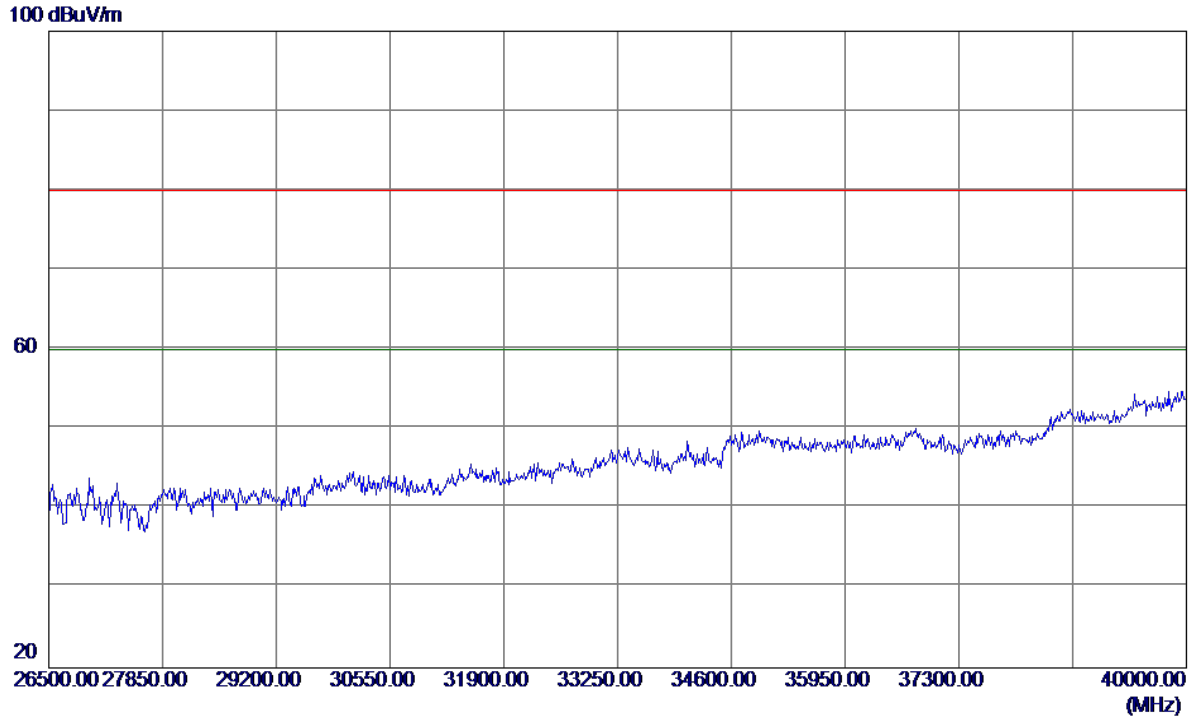


| No. | Freq. | Reading Level | Correct Factor | Measure ment | Limit | Margin | | |
|---|---|---|---|---|---|---|---|---|
| | MHz | dBuV/m | dB | dBuV/m | dBuV/m | dB | Detector | Comment |

| | |
|---|---|
| Orthogonal Axis : | X |
| Test Mode : | UNII-2C/ TX N20 Mode 5700MHz |


**Vertical**

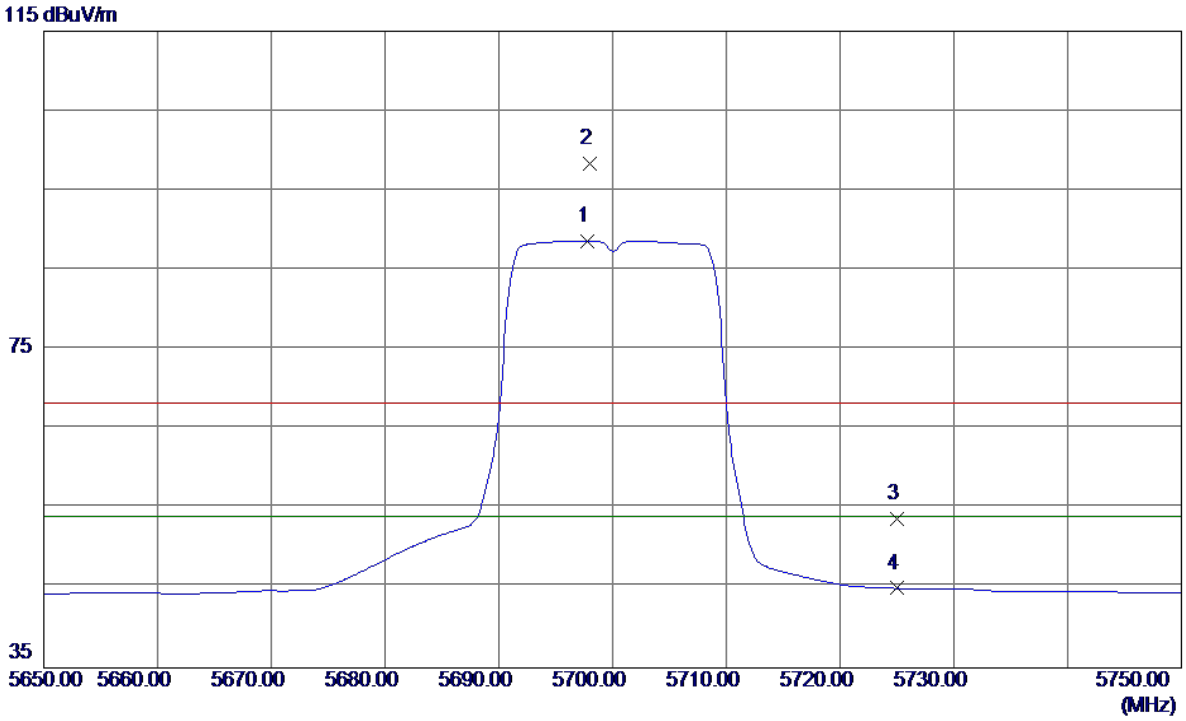


| No. | Freq. | Reading Level | Correct Factor | Measure ment | Limit | Margin | | |
|---|---|---|---|---|---|---|---|---|
| | MHz | dBuV/m | dB | dBuV/m | dBuV/m | dB | Detector | Comment |
| 1 * | 5697.8000 | 45.11 | 43.48 | 88.59 | 54.00 | 34.59 | AVG | No Limit |
| 2 | 5698.0000 | 54.84 | 43.48 | 98.32 | 68.30 | 30.02 | Peak | No Limit |
| 3 | 5725.0000 | 10.22 | 43.56 | 53.78 | 68.30 | -14.52 | Peak | |
| 4 | 5725.0000 | 1.44 | 43.56 | 45.00 | 54.00 | -9.00 | AVG | |

| | |
|---|---|
| Orthogonal Axis : | X |
| Test Mode : | UNII-2C/ TX N20 Mode 5700MHz |


**Vertical**

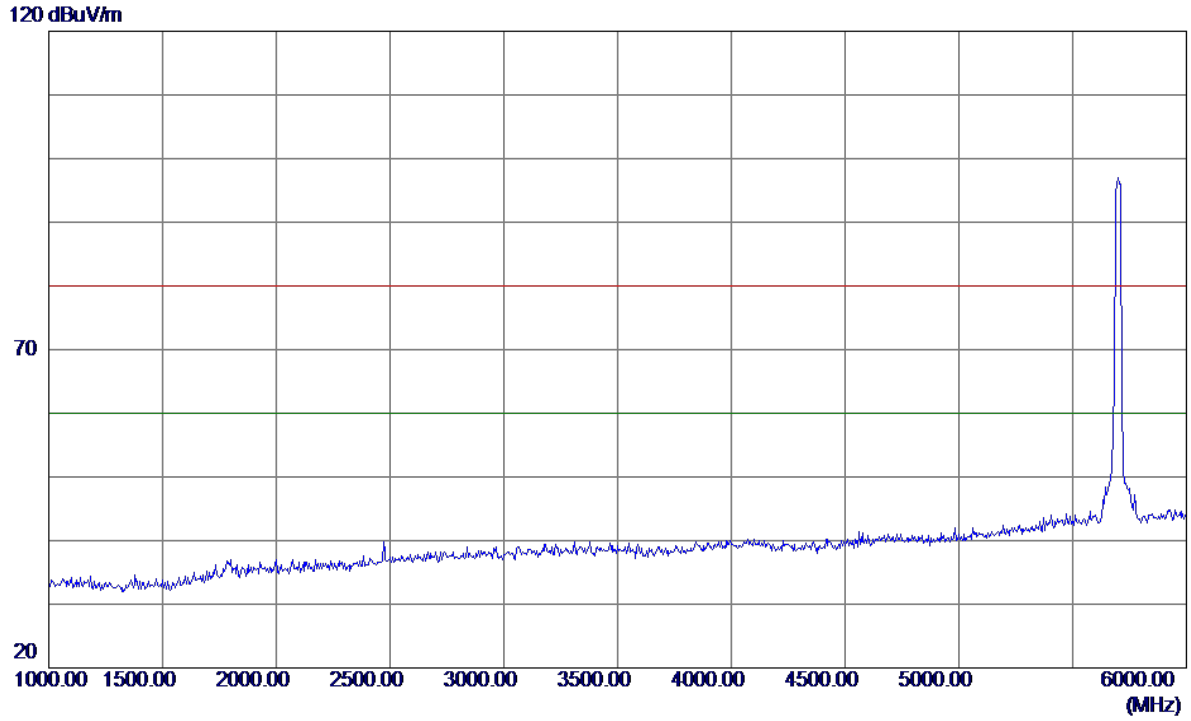


| No. | Freq. | Reading Level | Correct Factor | Measure ment | Limit | Margin | | |
|---|---|---|---|---|---|---|---|---|
| | MHz | dBuV/m | dB | dBuV/m | dBuV/m | dB | Detector | Comment |

| | |
|---|---|
| Orthogonal Axis : | X |
| Test Mode : | UNII-2C/ TX N20 Mode 5700MHz |


**Vertical**

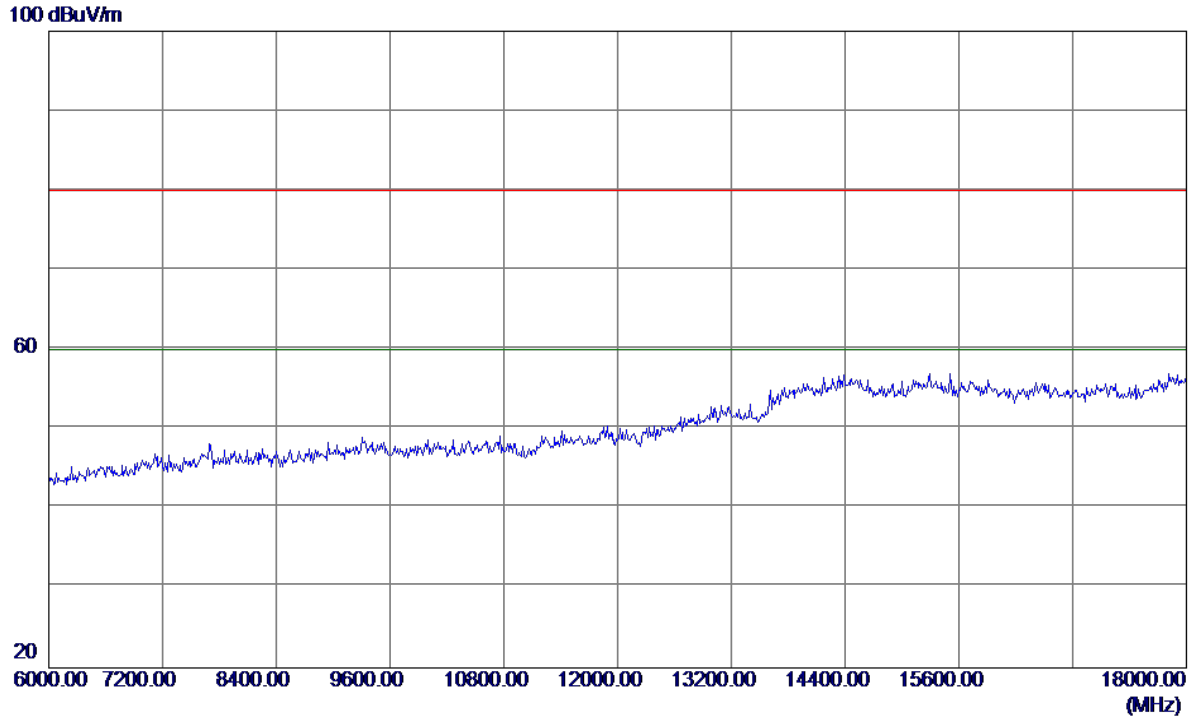


| No. | Freq. | Reading Level | Correct Factor | Measure ment | Limit | Margin | | |
|---|---|---|---|---|---|---|---|---|
| | MHz | dBuV/m | dB | dBuV/m | dBuV/m | dB | Detector | Comment |

| | |
|---|---|
| Orthogonal Axis : | X |
| Test Mode : | UNII-2C/ TX N20 Mode 5700MHz |


**Vertical**

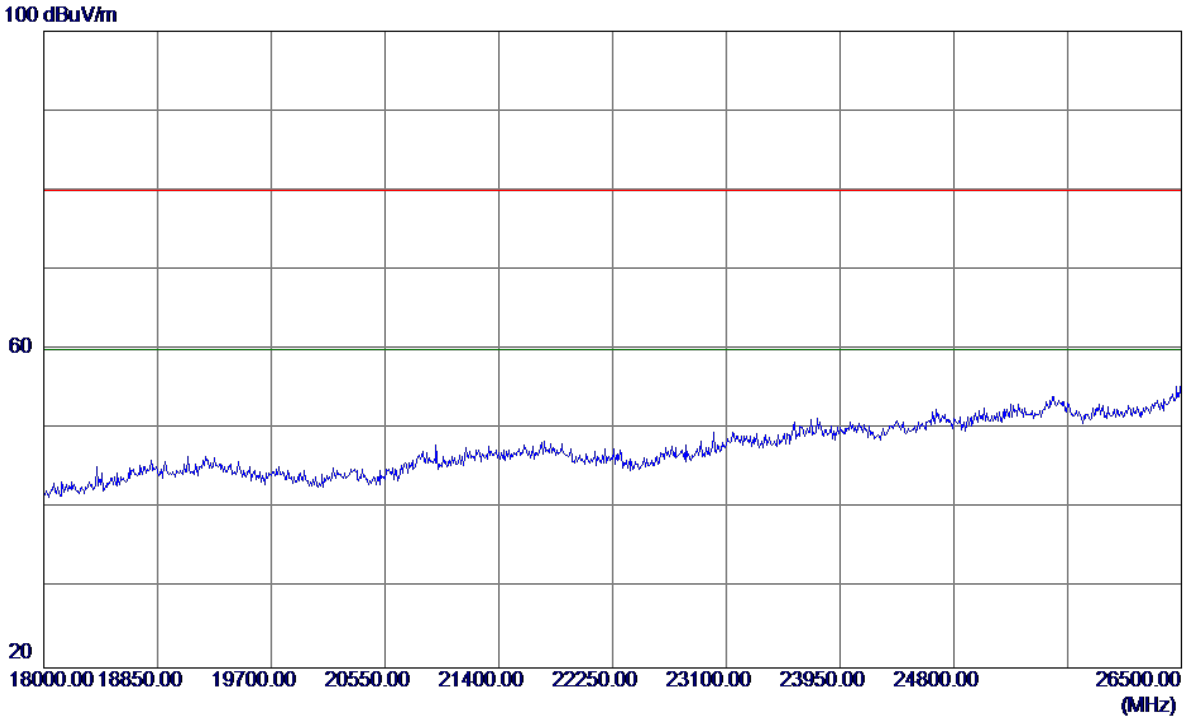


| No. | Freq. | Reading Level | Correct Factor | Measure ment | Limit | Margin | | |
|---|---|---|---|---|---|---|---|---|
| | MHz | dBuV/m | dB | dBuV/m | dBuV/m | dB | Detector | Comment |

| | |
|---|---|
| Orthogonal Axis : | X |
| Test Mode : | UNII-2C/ TX N20 Mode 5700MHz |


**Vertical**

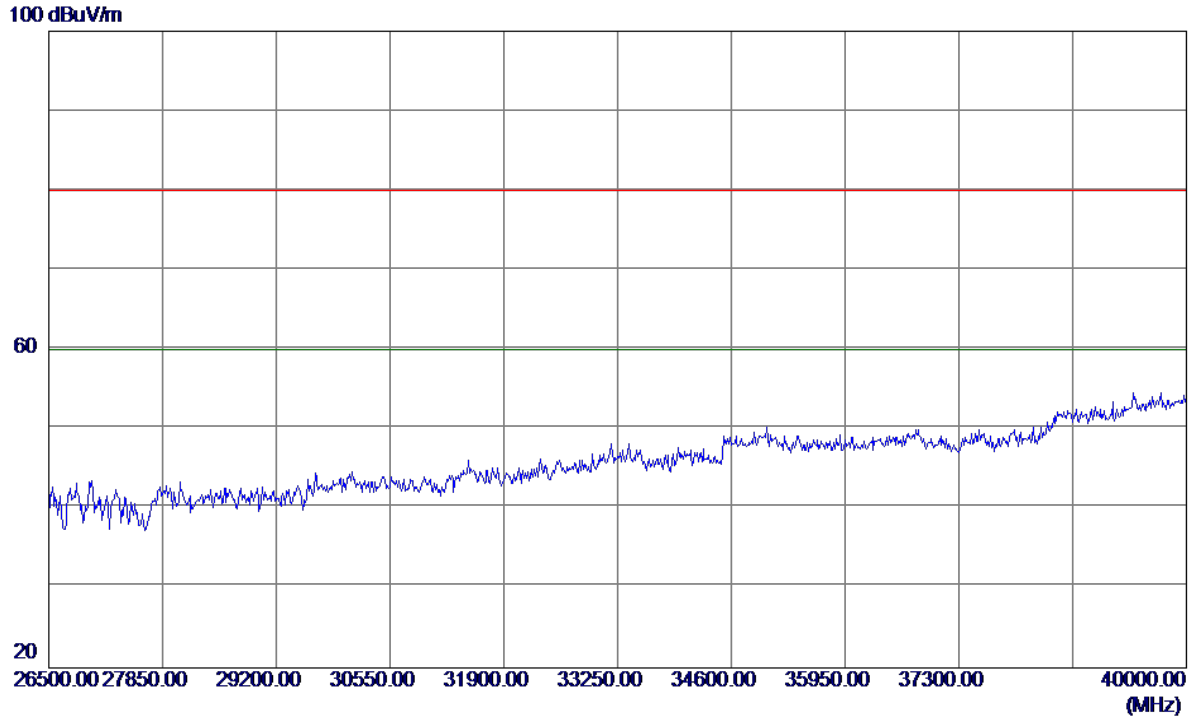


| No. | Freq. | Reading Level | Correct Factor | Measure ment | Limit | Margin | | |
|---|---|---|---|---|---|---|---|---|
| | MHz | dBuV/m | dB | dBuV/m | dBuV/m | dB | Detector | Comment |

| | |
|---|---|
| Orthogonal Axis : | X |
| Test Mode : | UNII-2C/ TX N20 Mode 5700MHz |


**Horizontal**

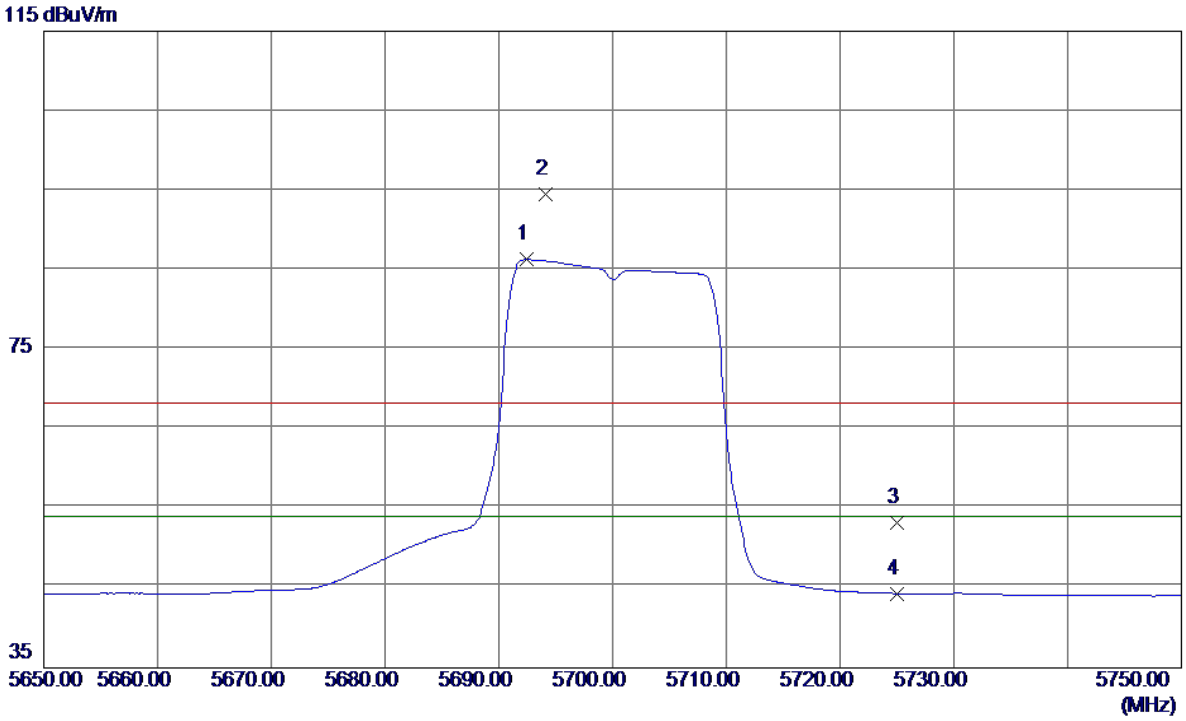


| No. | Freq. | Reading Level | Correct Factor | Measure ment | Limit | Margin | | |
|---|---|---|---|---|---|---|---|---|
| | MHz | dBuV/m | dB | dBuV/m | dBuV/m | dB | Detector | Comment |
| 1 * | 5692.4000 | 42.85 | 43.46 | 86.31 | 54.00 | 32.31 | AVG | No Limit |
| 2 | 5694.1000 | 51.13 | 43.47 | 94.60 | 68.30 | 26.30 | Peak | No Limit |
| 3 | 5725.0000 | 9.63 | 43.56 | 53.19 | 68.30 | -15.11 | Peak | |
| 4 | 5725.0000 | 0.79 | 43.56 | 44.35 | 54.00 | -9.65 | AVG | |

| | |
|---|---|
| Orthogonal Axis : | X |
| Test Mode : | UNII-2C/ TX N20 Mode 5700MHz |


**Horizontal**

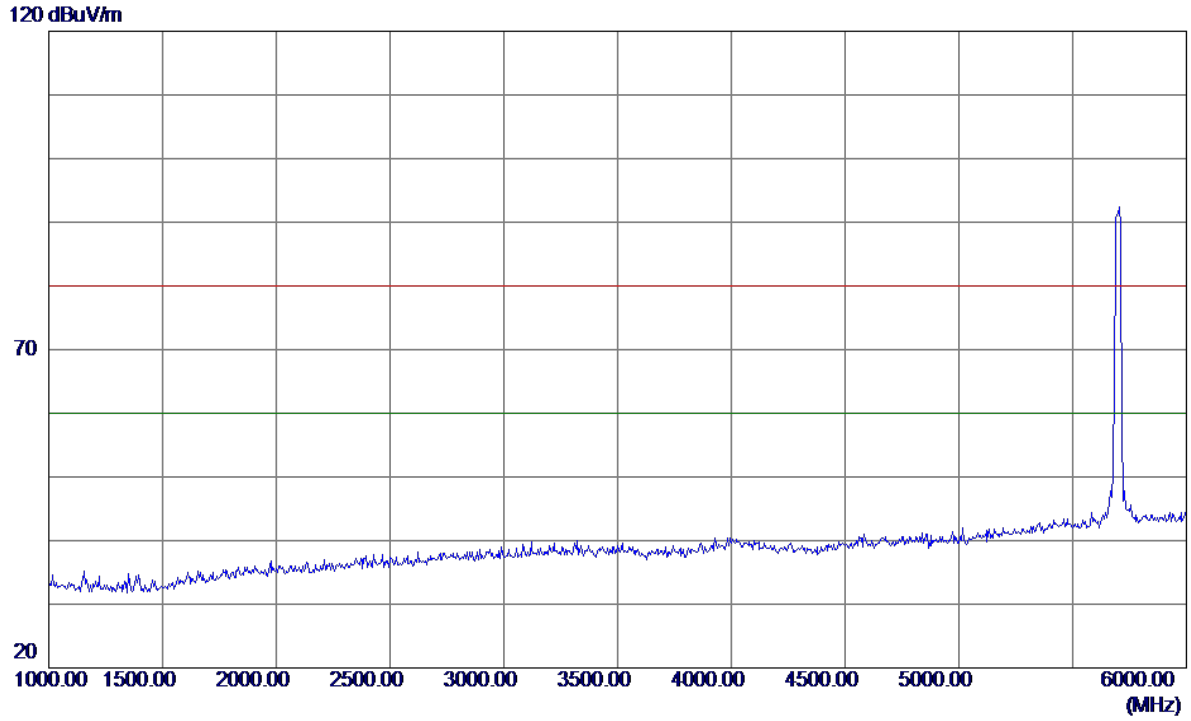


| No. | Freq. | Reading Level | Correct Factor | Measure ment | Limit | Margin | | |
|---|---|---|---|---|---|---|---|---|
| | MHz | dBuV/m | dB | dBuV/m | dBuV/m | dB | Detector | Comment |

| | |
|---|---|
| Orthogonal Axis : | X |
| Test Mode : | UNII-2C/ TX N20 Mode 5700MHz |


**Horizontal**

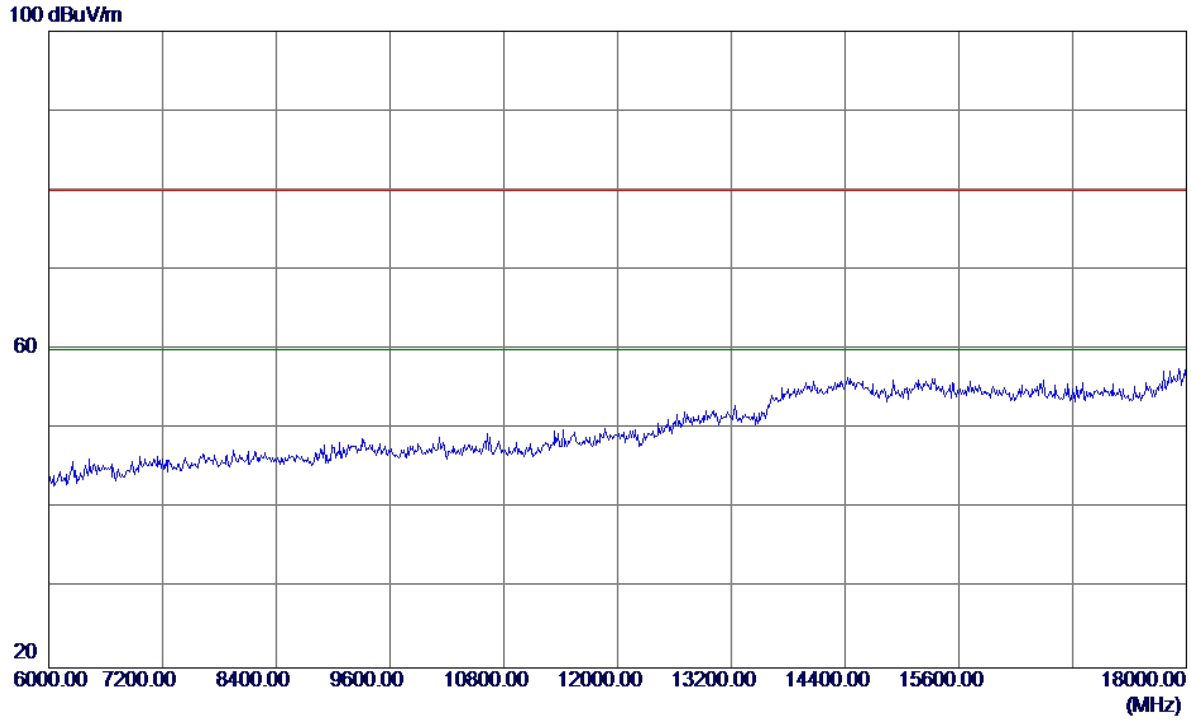


| No. | Freq. | Reading Level | Correct Factor | Measure ment | Limit | Margin | | |
|---|---|---|---|---|---|---|---|---|
| | MHz | dBuV/m | dB | dBuV/m | dBuV/m | dB | Detector | Comment |

| | |
|---|---|
| Orthogonal Axis : | X |
| Test Mode : | UNII-2C/ TX N20 Mode 5700MHz |


**Horizontal**

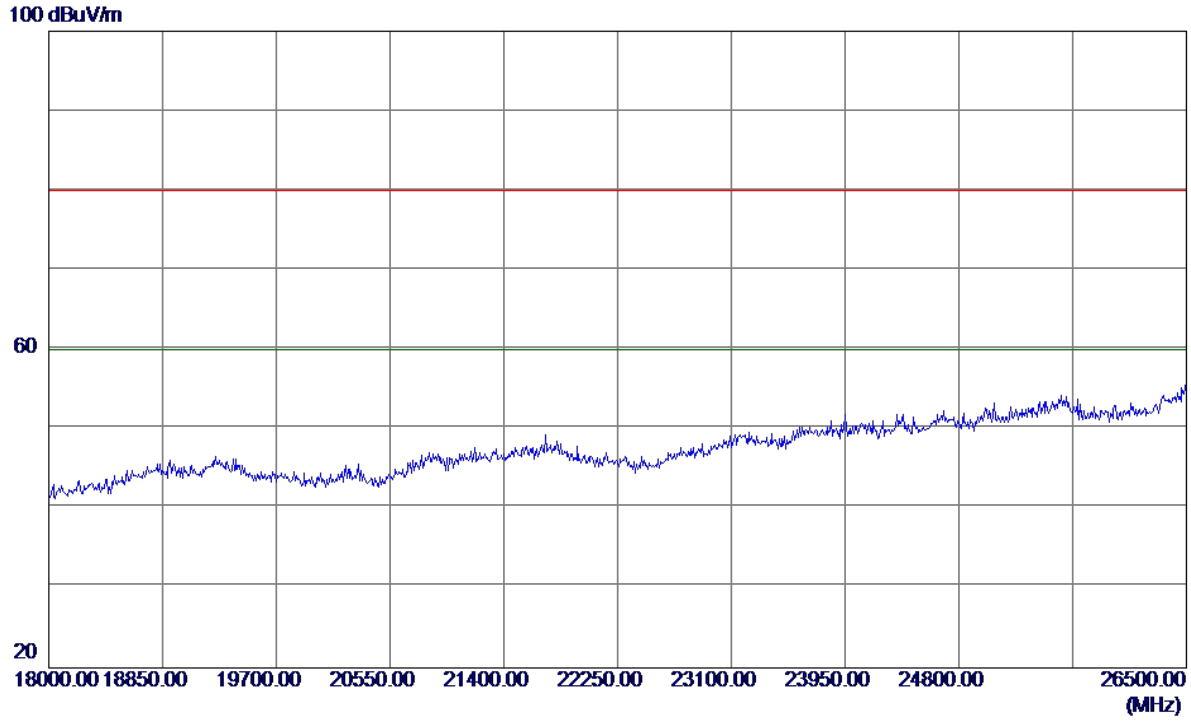


| No. | Freq. | Reading Level | Correct Factor | Measure ment | Limit | Margin | | |
|---|---|---|---|---|---|---|---|---|
| | MHz | dBuV/m | dB | dBuV/m | dBuV/m | dB | Detector | Comment |

| | |
|---|---|
| Orthogonal Axis : | X |
| Test Mode : | UNII-2C/ TX N20 Mode 5700MHz |


**Horizontal**

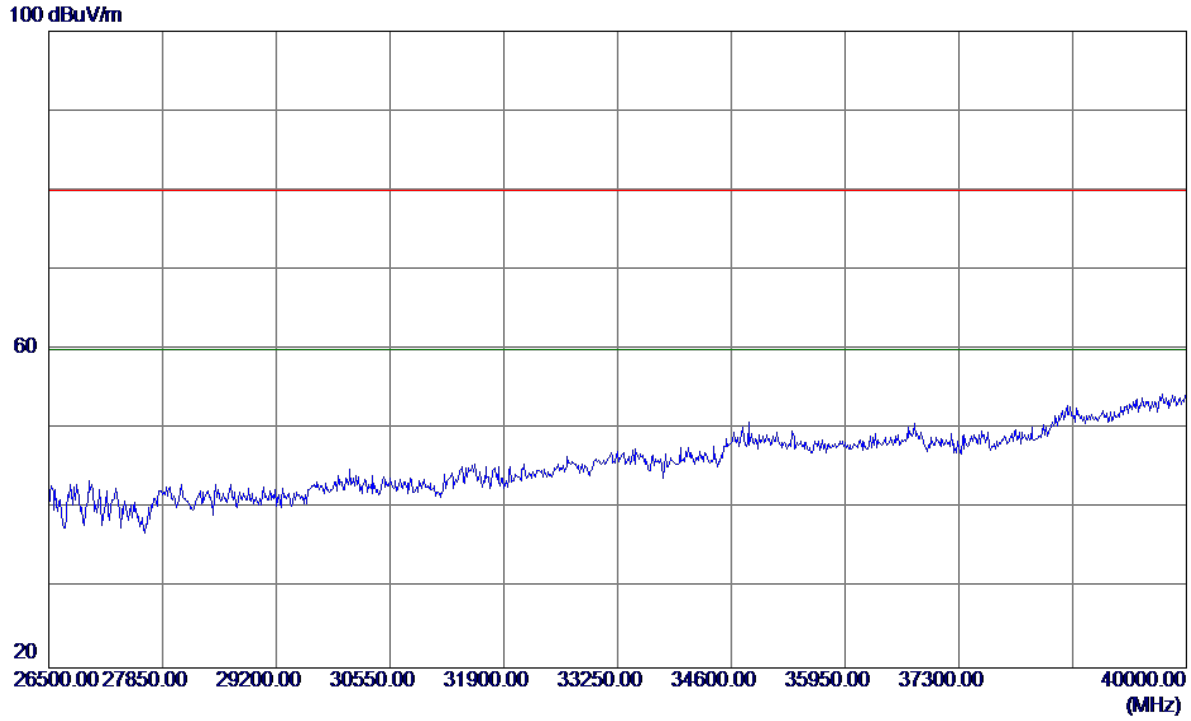


| No. | Freq. | Reading Level | Correct Factor | Measure ment | Limit | Margin | | |
|---|---|---|---|---|---|---|---|---|
| | MHz | dBuV/m | dB | dBuV/m | dBuV/m | dB | Detector | Comment |

| | |
|---|---|
| Orthogonal Axis : | X |
| Test Mode : | UNII-2C/ TX N40 Mode 5510MHz |


**Vertical**

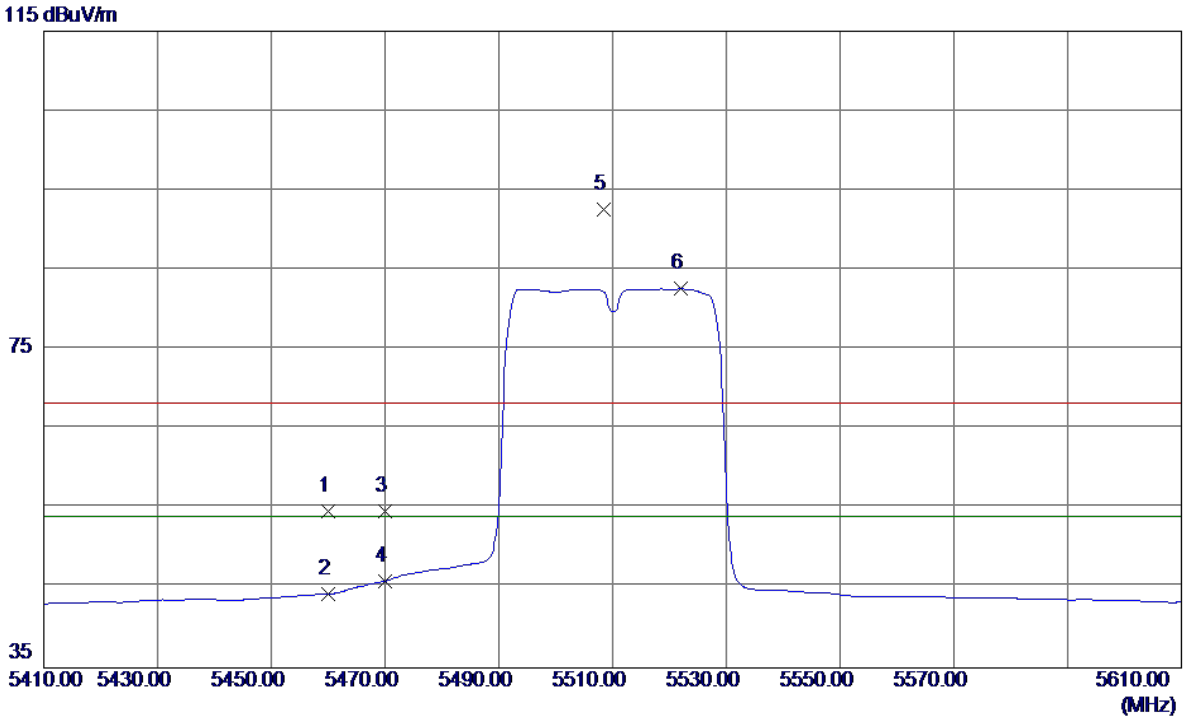


| No. | Freq. | Reading Level | Correct Factor | Measure ment | Limit | Margin | | |
|---|---|---|---|---|---|---|---|---|
| | MHz | dBuV/m | dB | dBuV/m | dBuV/m | dB | Detector | Comment |
| 1 | 5460.0000 | 11.93 | 42.68 | 54.61 | 68.30 | -13.69 | Peak | |
| 2 | 5460.0000 | 1.58 | 42.68 | 44.26 | 54.00 | -9.74 | AVG | |
| 3 | 5470.0000 | 11.93 | 42.73 | 54.66 | 68.30 | -13.64 | Peak | |
| 4 | 5470.0000 | 3.17 | 42.73 | 45.90 | 54.00 | -8.10 | AVG | |
| 5 | 5508.4000 | 49.69 | 42.91 | 92.60 | 68.30 | 24.30 | Peak | No Limit |
| 6 * | 5522.0000 | 39.66 | 42.95 | 82.61 | 54.00 | 28.61 | AVG | No Limit |

| | |
|---|---|
| Orthogonal Axis : | X |
| Test Mode : | UNII-2C/ TX N40 Mode 5510MHz |


**Vertical**

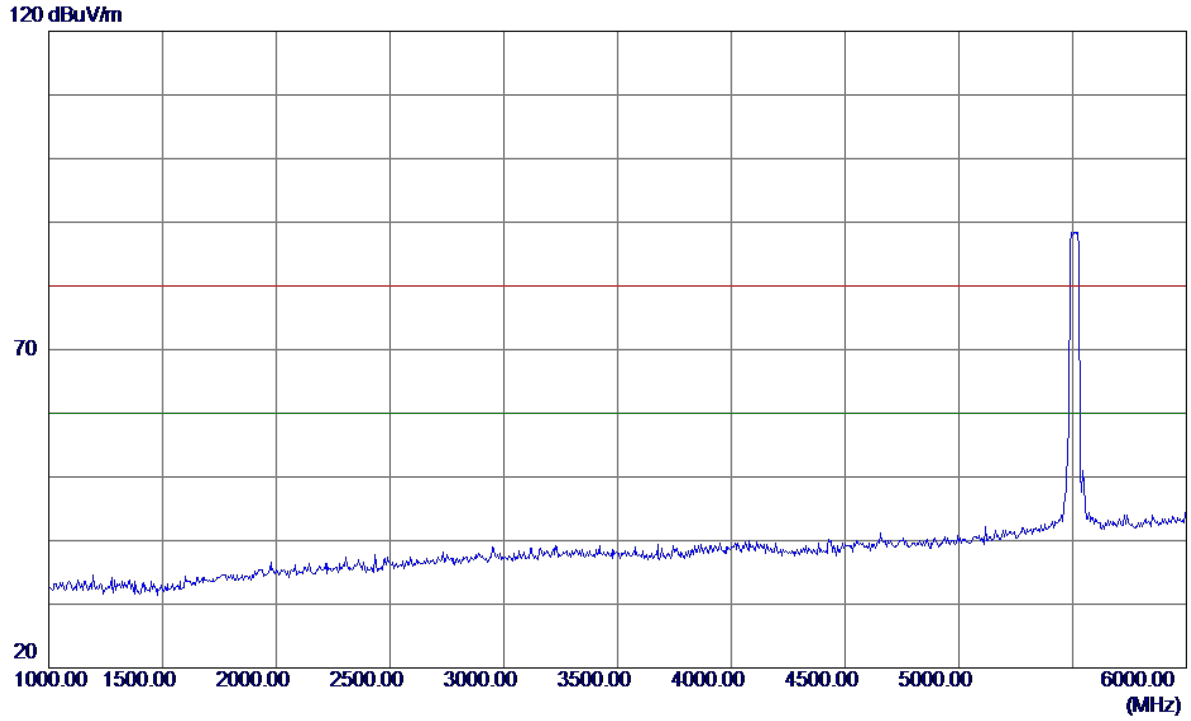


| No. | Freq. | Reading Level | Correct Factor | Measure ment | Limit | Margin | | |
|---|---|---|---|---|---|---|---|---|
| | MHz | dBuV/m | dB | dBuV/m | dBuV/m | dB | Detector | Comment |

| | |
|---|---|
| Orthogonal Axis : | X |
| Test Mode : | UNII-2C/ TX N40 Mode 5510MHz |


**Vertical**

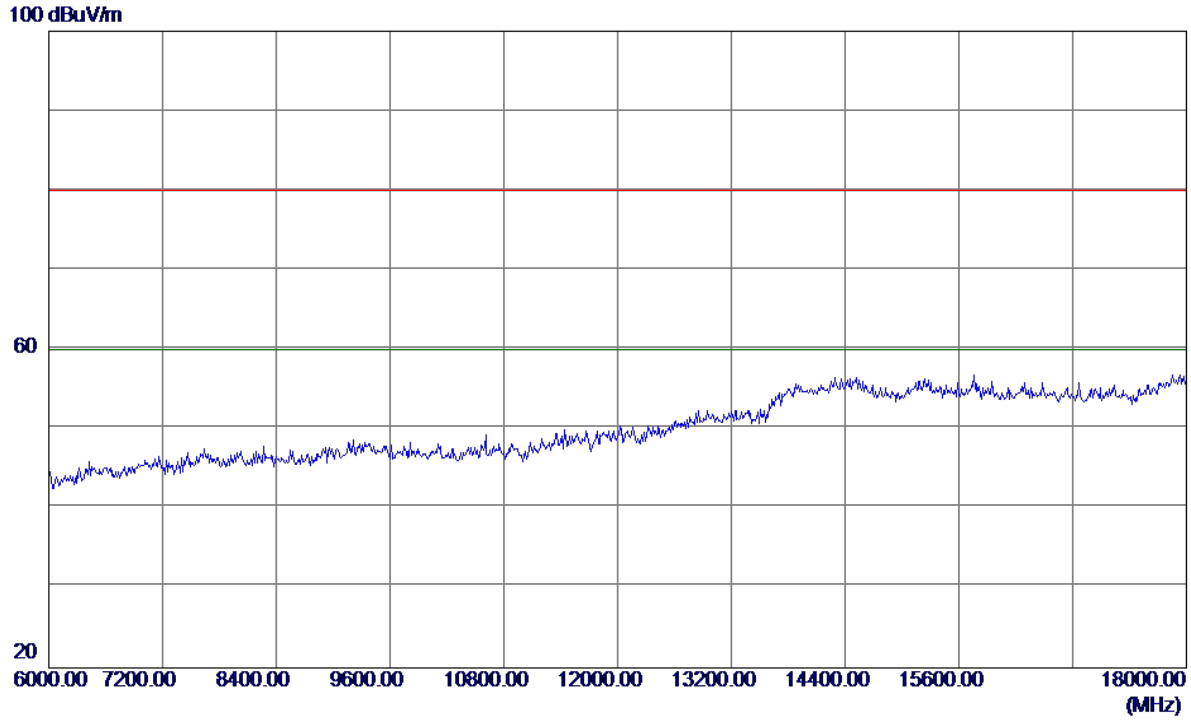


| No. | Freq. | Reading Level | Correct Factor | Measure ment | Limit | Margin | | |
|---|---|---|---|---|---|---|---|---|
| | MHz | dBuV/m | dB | dBuV/m | dBuV/m | dB | Detector | Comment |

| | |
|---|---|
| Orthogonal Axis : | X |
| Test Mode : | UNII-2C/ TX N40 Mode 5510MHz |


**Vertical**

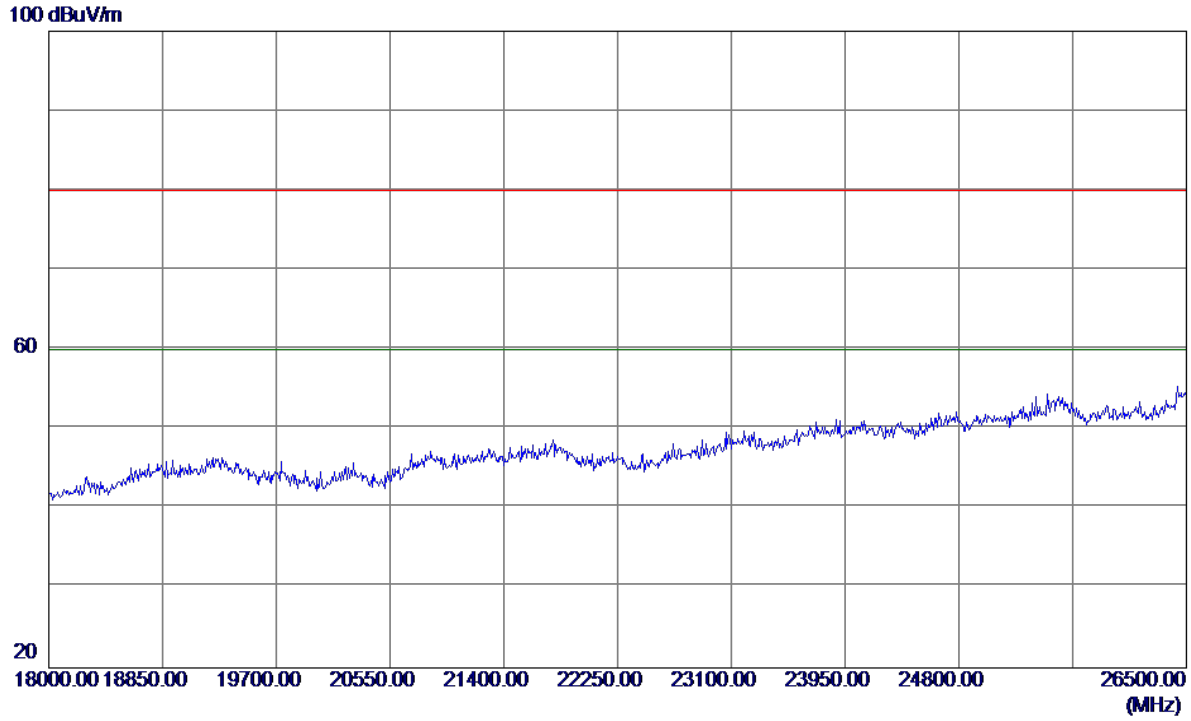


| No. | Freq. | Reading Level | Correct Factor | Measure ment | Limit | Margin | | |
|---|---|---|---|---|---|---|---|---|
| | MHz | dBuV/m | dB | dBuV/m | dBuV/m | dB | Detector | Comment |

| | |
|---|---|
| Orthogonal Axis : | X |
| Test Mode : | UNII-2C/ TX N40 Mode 5510MHz |


**Vertical**

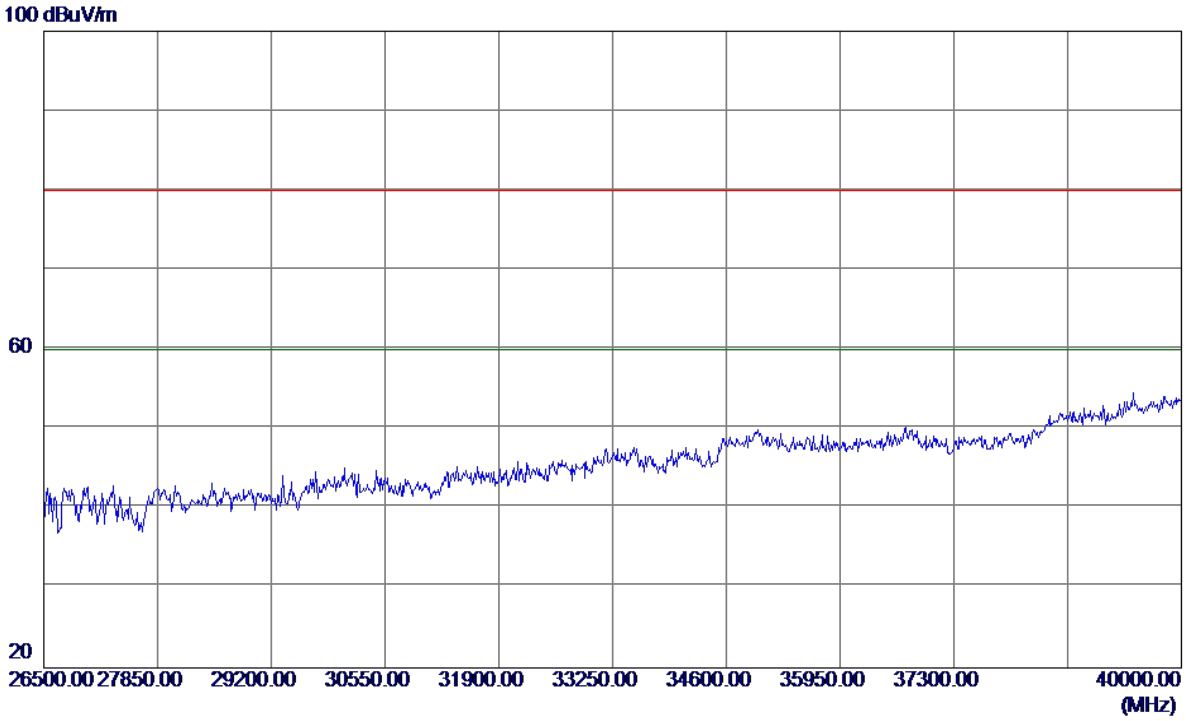


| No. | Freq. | Reading Level | Correct Factor | Measure ment | Limit | Margin | | |
|---|---|---|---|---|---|---|---|---|
| | MHz | dBuV/m | dB | dBuV/m | dBuV/m | dB | Detector | Comment |

| | |
|---|---|
| Orthogonal Axis : | X |
| Test Mode : | UNII-2C/ TX N40 Mode 5510MHz |


**Horizontal**

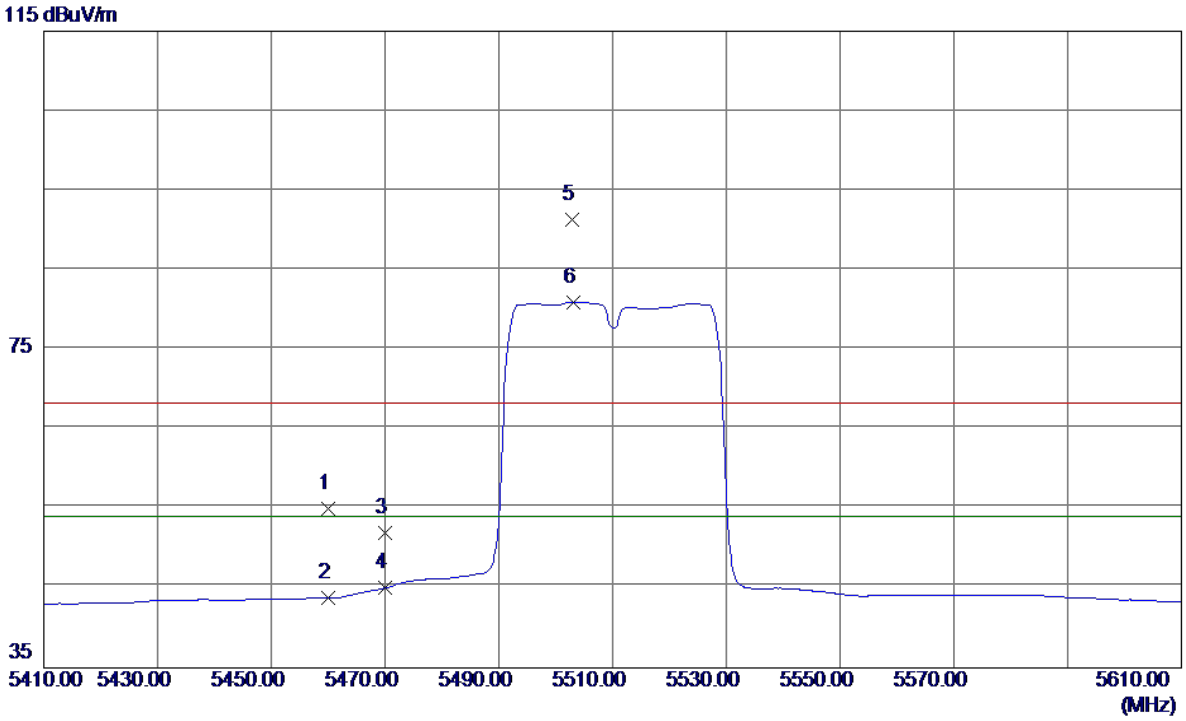


| No. | Freq. | Reading Level | Correct Factor | Measure ment | Limit | Margin | | |
|---|---|---|---|---|---|---|---|---|
| | MHz | dBuV/m | dB | dBuV/m | dBuV/m | dB | Detector | Comment |
| 1 | 5460.0000 | 12.26 | 42.68 | 54.94 | 68.30 | -13.36 | Peak | |
| 2 | 5460.0000 | 1.05 | 42.68 | 43.73 | 54.00 | -10.27 | AVG | |
| 3 | 5470.0000 | 9.30 | 42.73 | 52.03 | 68.30 | -16.27 | Peak | |
| 4 | 5470.0000 | 2.30 | 42.73 | 45.03 | 54.00 | -8.97 | AVG | |
| 5 | 5502.8000 | 48.45 | 42.89 | 91.34 | 68.30 | 23.04 | Peak | No Limit |
| 6 * | 5503.2000 | 38.05 | 42.89 | 80.94 | 54.00 | 26.94 | AVG | No Limit |

| | |
|---|---|
| Orthogonal Axis : | X |
| Test Mode : | UNII-2C/ TX N40 Mode 5510MHz |


**Horizontal**

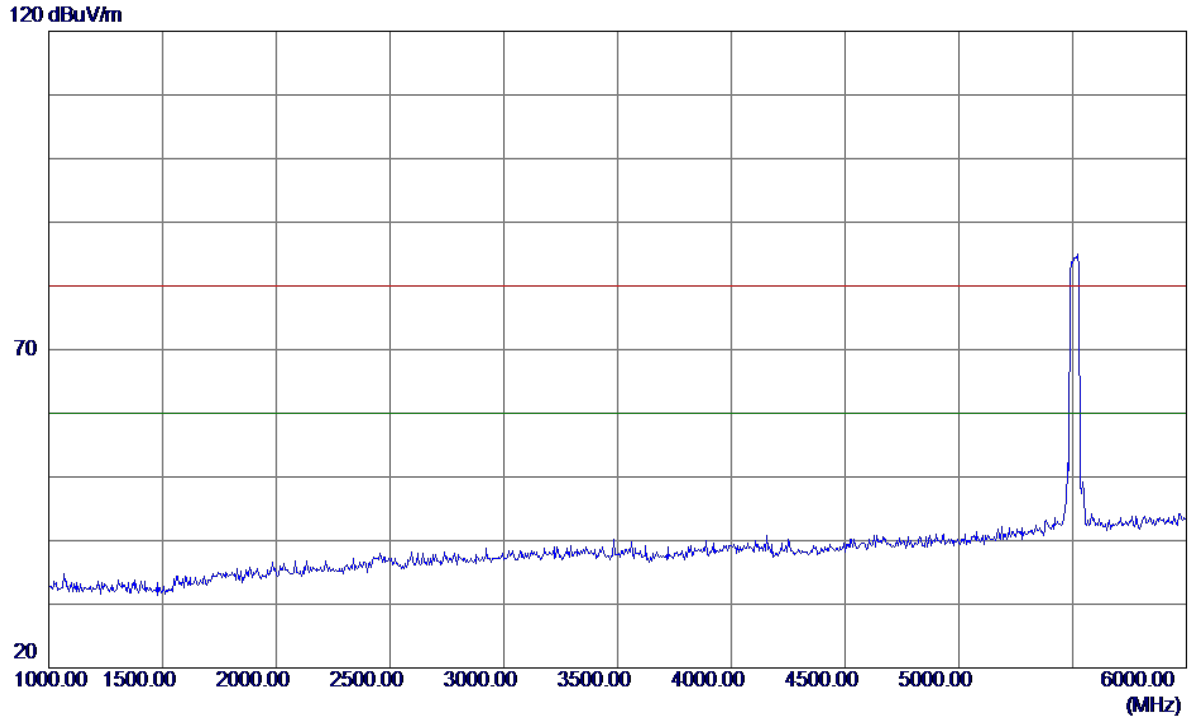


| No. | Freq. | Reading Level | Correct Factor | Measure ment | Limit | Margin | | |
|---|---|---|---|---|---|---|---|---|
| | MHz | dBuV/m | dB | dBuV/m | dBuV/m | dB | Detector | Comment |

| | |
|---|---|
| Orthogonal Axis : | X |
| Test Mode : | UNII-2C/ TX N40 Mode 5510MHz |


**Horizontal**

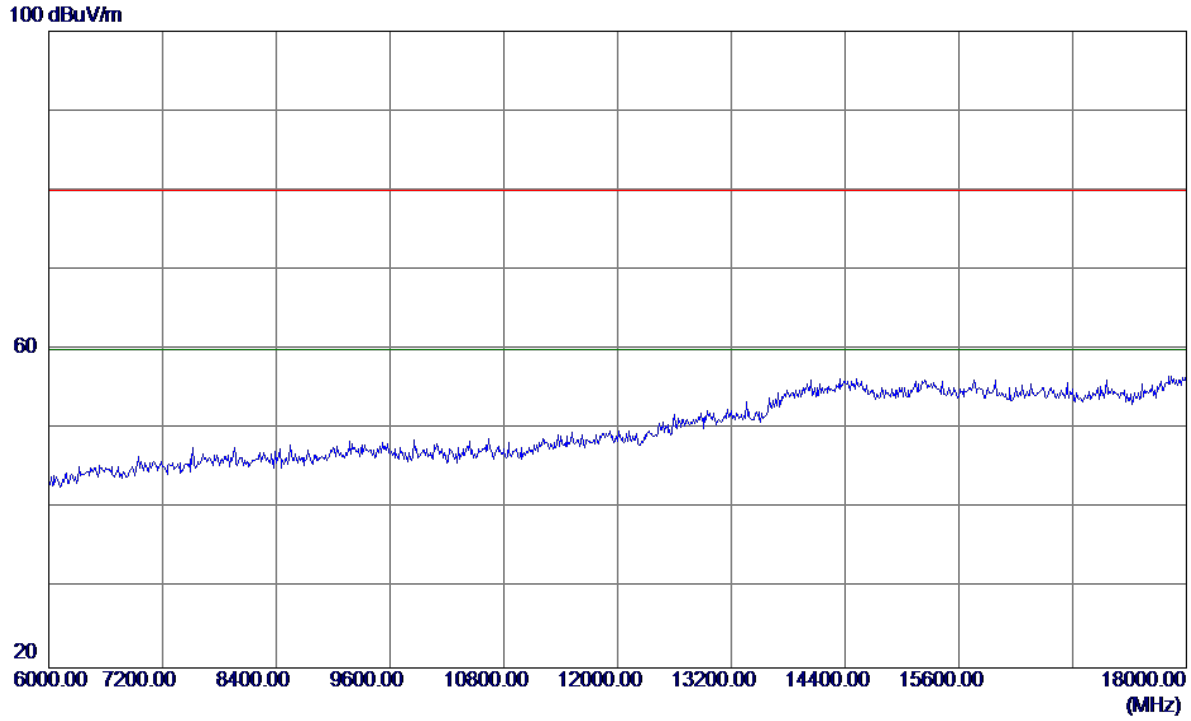


| No. | Freq. | Reading Level | Correct Factor | Measure ment | Limit | Margin | | |
|---|---|---|---|---|---|---|---|---|
| | MHz | dBuV/m | dB | dBuV/m | dBuV/m | dB | Detector | Comment |

| | |
|---|---|
| Orthogonal Axis : | X |
| Test Mode : | UNII-2C/ TX N40 Mode 5510MHz |


**Horizontal**

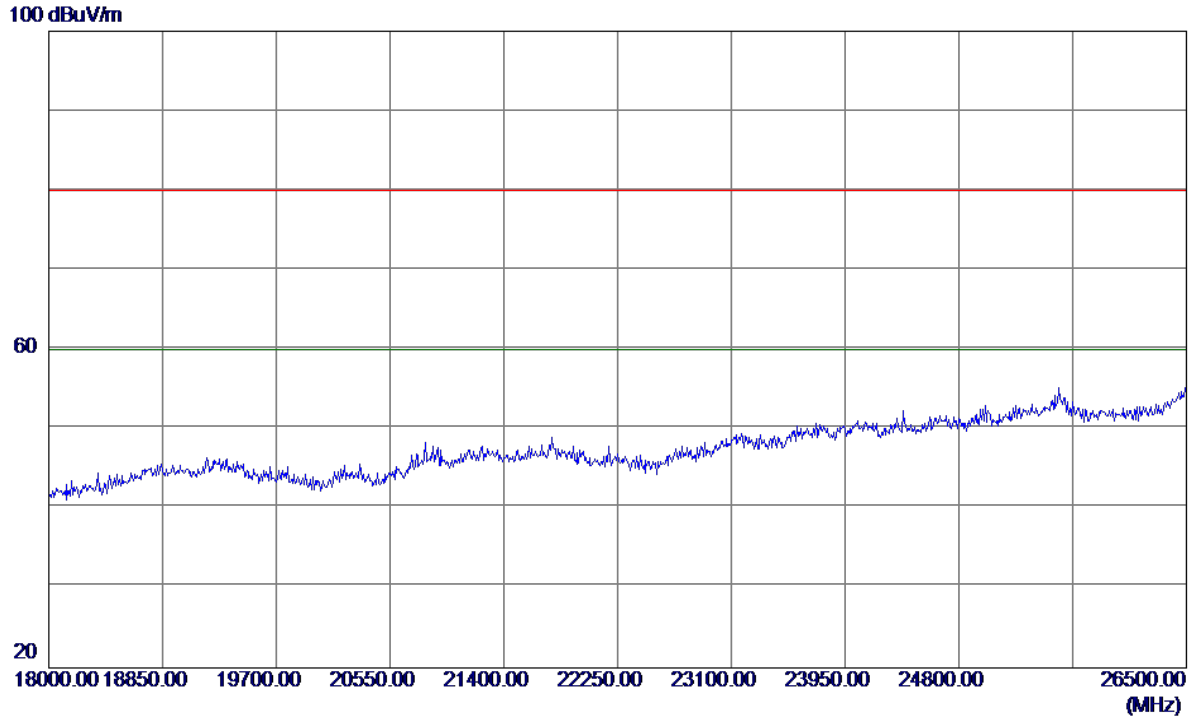


| No. | Freq. | Reading Level | Correct Factor | Measure ment | Limit | Margin | | |
|---|---|---|---|---|---|---|---|---|
| | MHz | dBuV/m | dB | dBuV/m | dBuV/m | dB | Detector | Comment |

| | |
|---|---|
| Orthogonal Axis : | X |
| Test Mode : | UNII-2C/ TX N40 Mode 5510MHz |


**Horizontal**

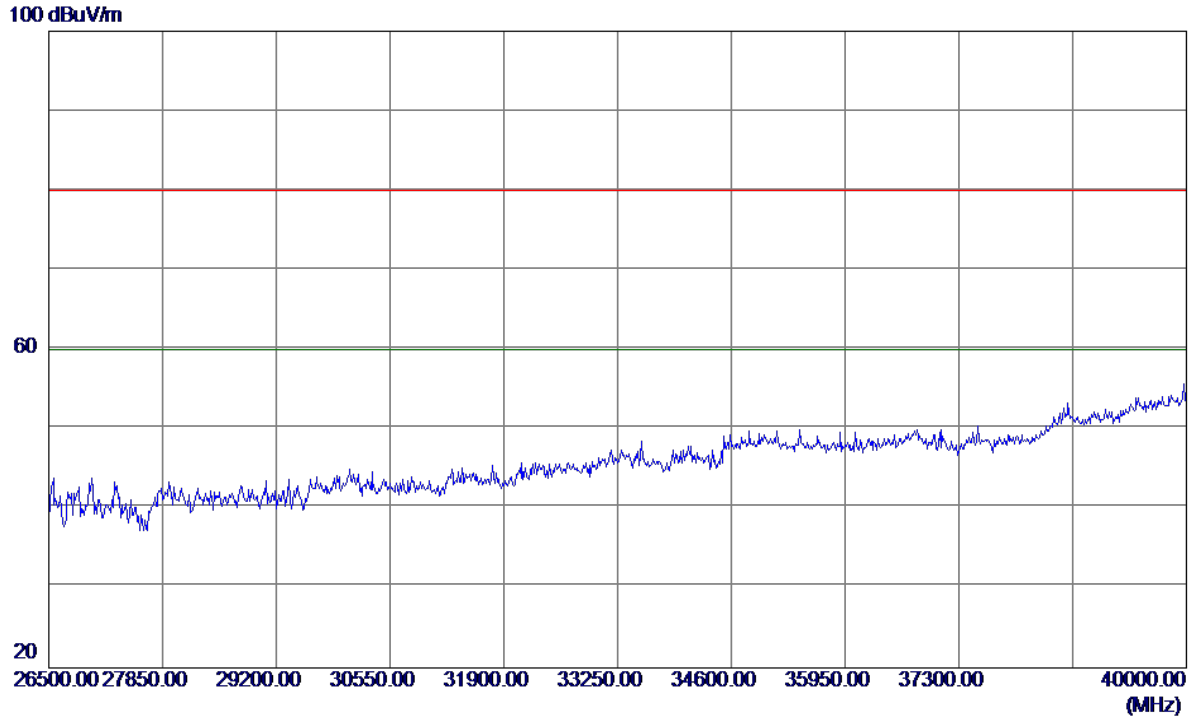


| No. | Freq. | Reading Level | Correct Factor | Measure ment | Limit | Margin | | |
|---|---|---|---|---|---|---|---|---|
| | MHz | dBuV/m | dB | dBuV/m | dBuV/m | dB | Detector | Comment |

| | |
|---|---|
| Orthogonal Axis : | X |
| Test Mode : | UNII-2C/ TX N40 Mode 5670MHz |


**Vertical**

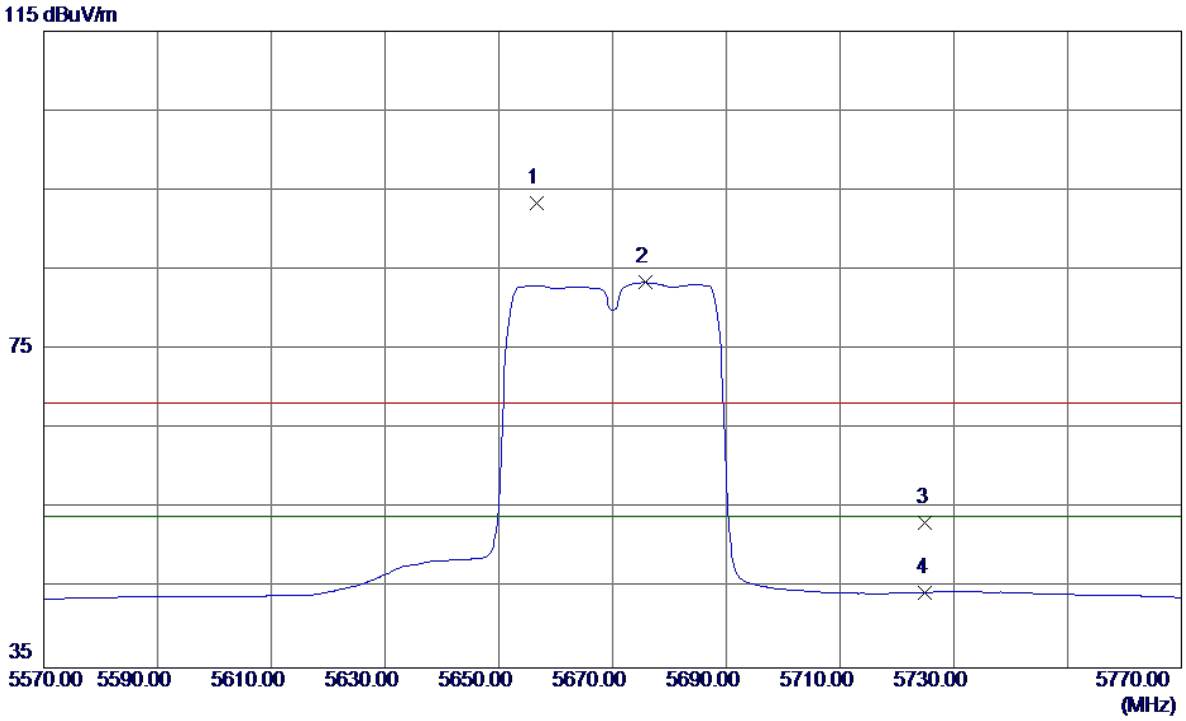


| No. | Freq. | Reading Level | Correct Factor | Measure ment | Limit | Margin | | |
|---|---|---|---|---|---|---|---|---|
| | MHz | dBuV/m | dB | dBuV/m | dBuV/m | dB | Detector | Comment |
| 1 | 5656.6000 | 50.12 | 43.35 | 93.47 | 68.30 | 25.17 | Peak | No Limit |
| 2 * | 5675.8000 | 40.01 | 43.41 | 83.42 | 54.00 | 29.42 | AVG | No Limit |
| 3 | 5725.0000 | 9.64 | 43.56 | 53.20 | 68.30 | -15.10 | Peak | |
| 4 | 5725.0000 | 0.94 | 43.56 | 44.50 | 54.00 | -9.50 | AVG | |

| | |
|---|---|
| Orthogonal Axis : | X |
| Test Mode : | UNII-2C/ TX N40 Mode 5670MHz |


**Vertical**

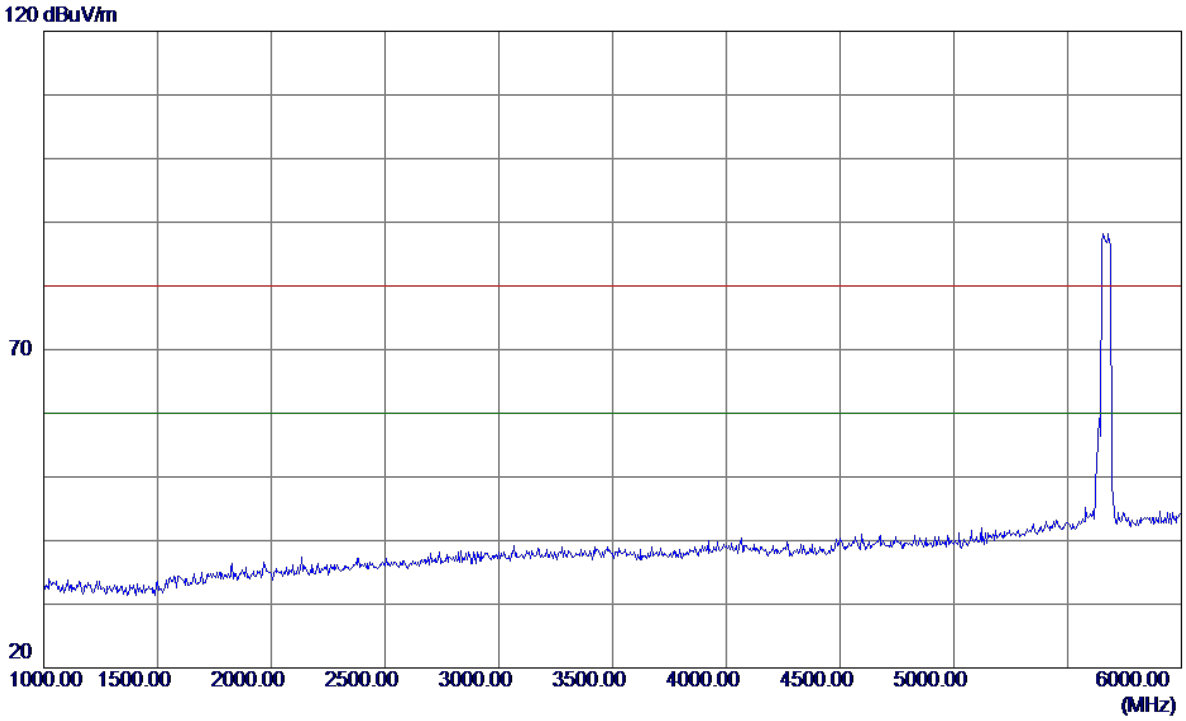


| No. | Freq. | Reading Level | Correct Factor | Measure ment | Limit | Margin | | |
|---|---|---|---|---|---|---|---|---|
| | MHz | dBuV/m | dB | dBuV/m | dBuV/m | dB | Detector | Comment |

| | |
|---|---|
| Orthogonal Axis : | X |
| Test Mode : | UNII-2C/ TX N40 Mode 5670MHz |


**Vertical**

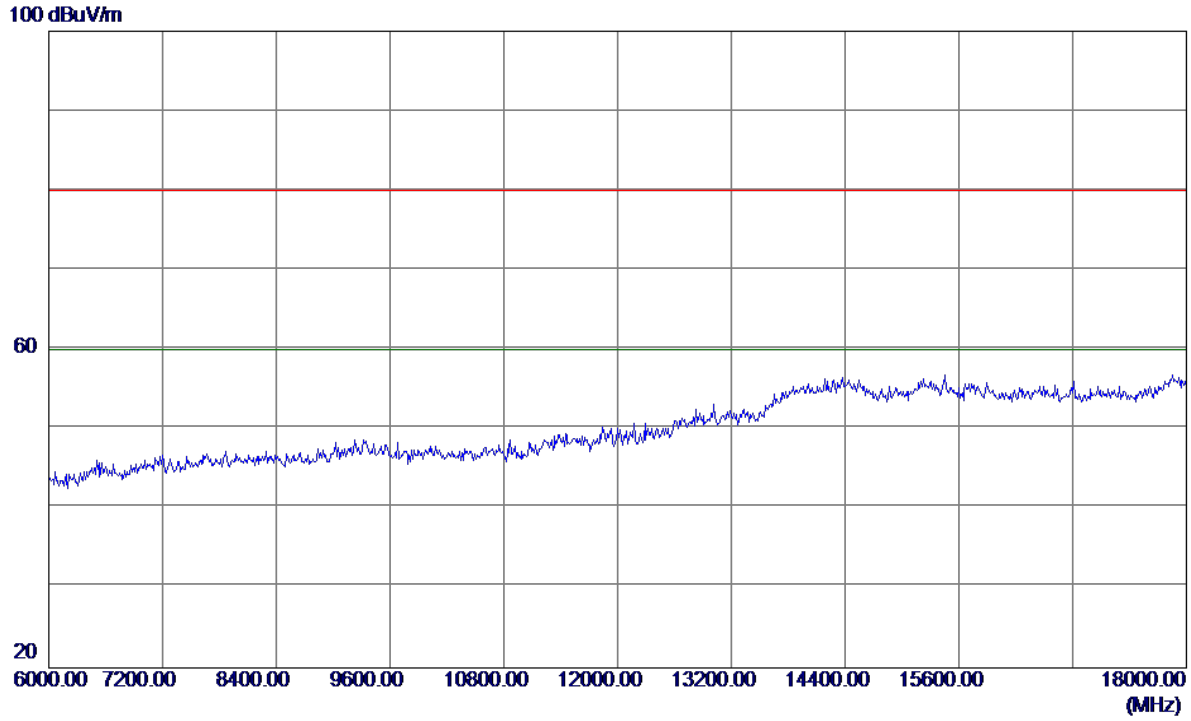


| No. | Freq. | Reading Level | Correct Factor | Measure ment | Limit | Margin | | |
|---|---|---|---|---|---|---|---|---|
| | MHz | dBuV/m | dB | dBuV/m | dBuV/m | dB | Detector | Comment |

| | |
|---|---|
| Orthogonal Axis : | X |
| Test Mode : | UNII-2C/ TX N40 Mode 5670MHz |


**Vertical**

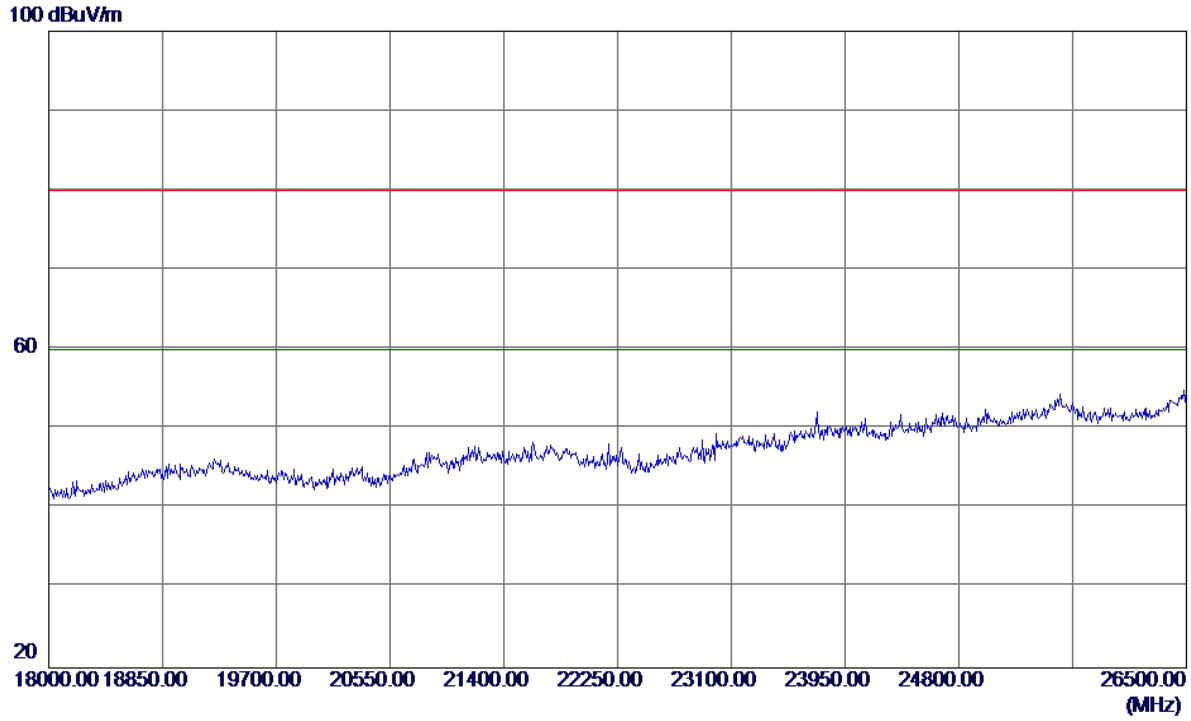


| No. | Freq. | Reading Level | Correct Factor | Measure ment | Limit | Margin | | |
|---|---|---|---|---|---|---|---|---|
| | MHz | dBuV/m | dB | dBuV/m | dBuV/m | dB | Detector | Comment |

| | |
|---|---|
| Orthogonal Axis : | X |
| Test Mode : | UNII-2C/ TX N40 Mode 5670MHz |


**Vertical**

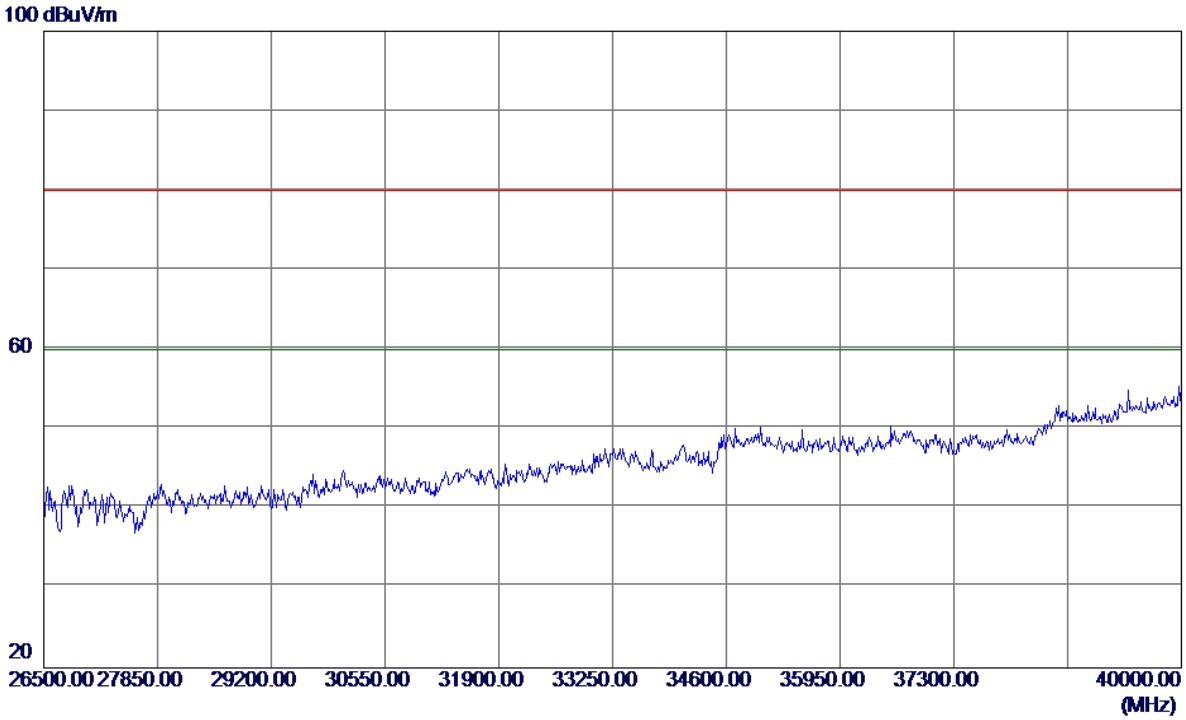


| No. | Freq. | Reading Level | Correct Factor | Measure ment | Limit | Margin | | |
|---|---|---|---|---|---|---|---|---|
| | MHz | dBuV/m | dB | dBuV/m | dBuV/m | dB | Detector | Comment |

| | |
|---|---|
| Orthogonal Axis : | X |
| Test Mode : | UNII-2C/ TX N40 Mode 5670MHz |


**Horizontal**

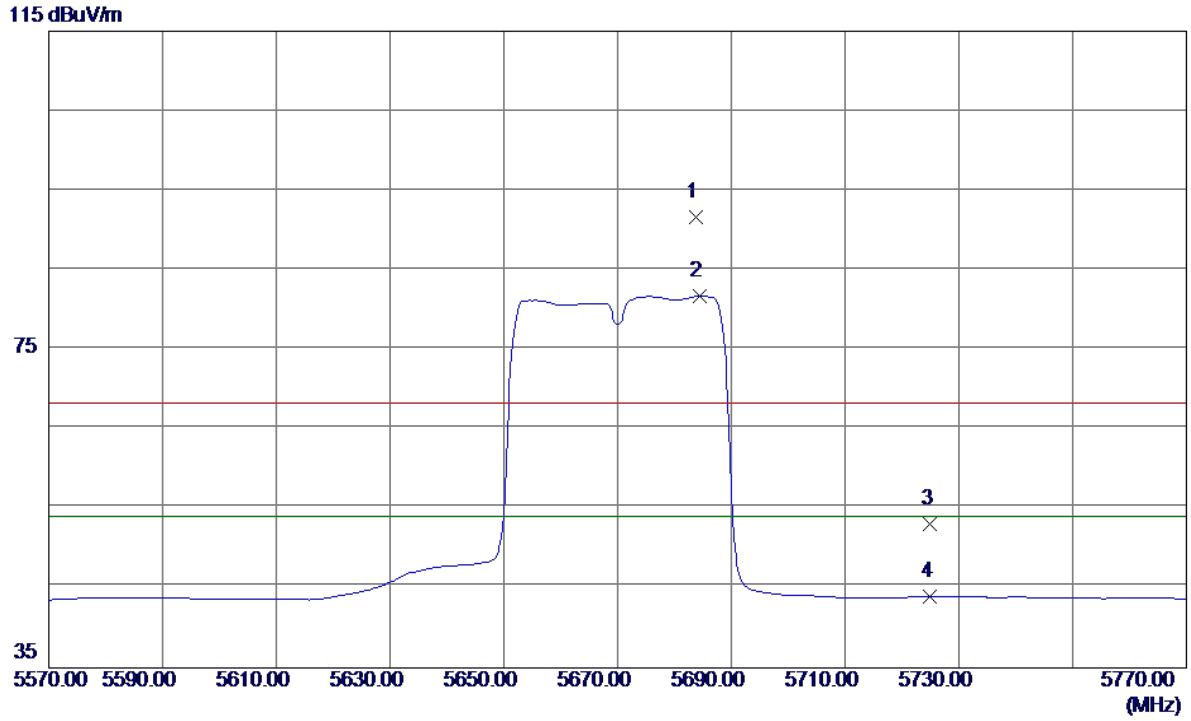


| No. | Freq. | Reading Level | Correct Factor | Measure ment | Limit | Margin | | |
|---|---|---|---|---|---|---|---|---|
| | MHz | dBuV/m | dB | dBuV/m | dBuV/m | dB | Detector | Comment |
| 1 | 5683.8000 | 48.26 | 43.44 | 91.70 | 68.30 | 23.40 | Peak | No Limit |
| 2 * | 5684.4000 | 38.32 | 43.44 | 81.76 | 54.00 | 27.76 | AVG | No Limit |
| 3 | 5725.0000 | 9.49 | 43.56 | 53.05 | 68.30 | -15.25 | Peak | |
| 4 | 5725.0000 | 0.35 | 43.56 | 43.91 | 54.00 | -10.09 | AVG | |

| | |
|---|---|
| Orthogonal Axis : | X |
| Test Mode : | UNII-2C/ TX N40 Mode 5670MHz |


**Horizontal**

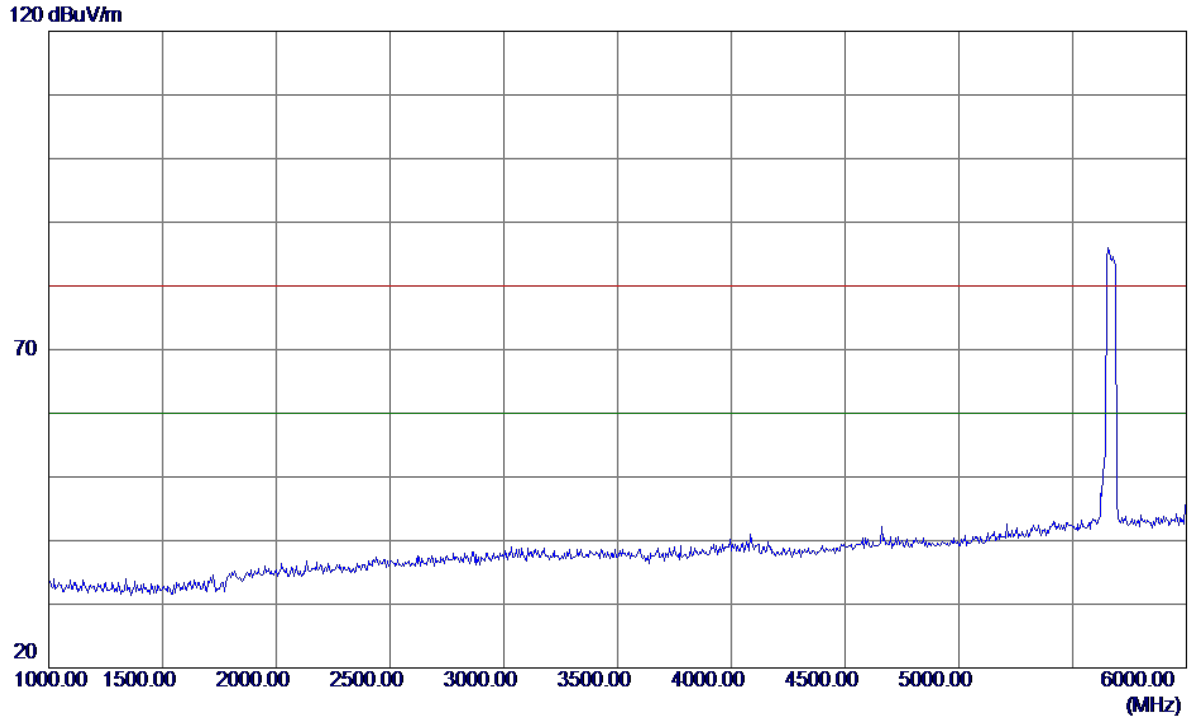


| No. | Freq. | Reading Level | Correct Factor | Measure ment | Limit | Margin | | |
|---|---|---|---|---|---|---|---|---|
| | MHz | dBuV/m | dB | dBuV/m | dBuV/m | dB | Detector | Comment |

| | |
|---|---|
| Orthogonal Axis : | X |
| Test Mode : | UNII-2C/ TX N40 Mode 5670MHz |


**Horizontal**

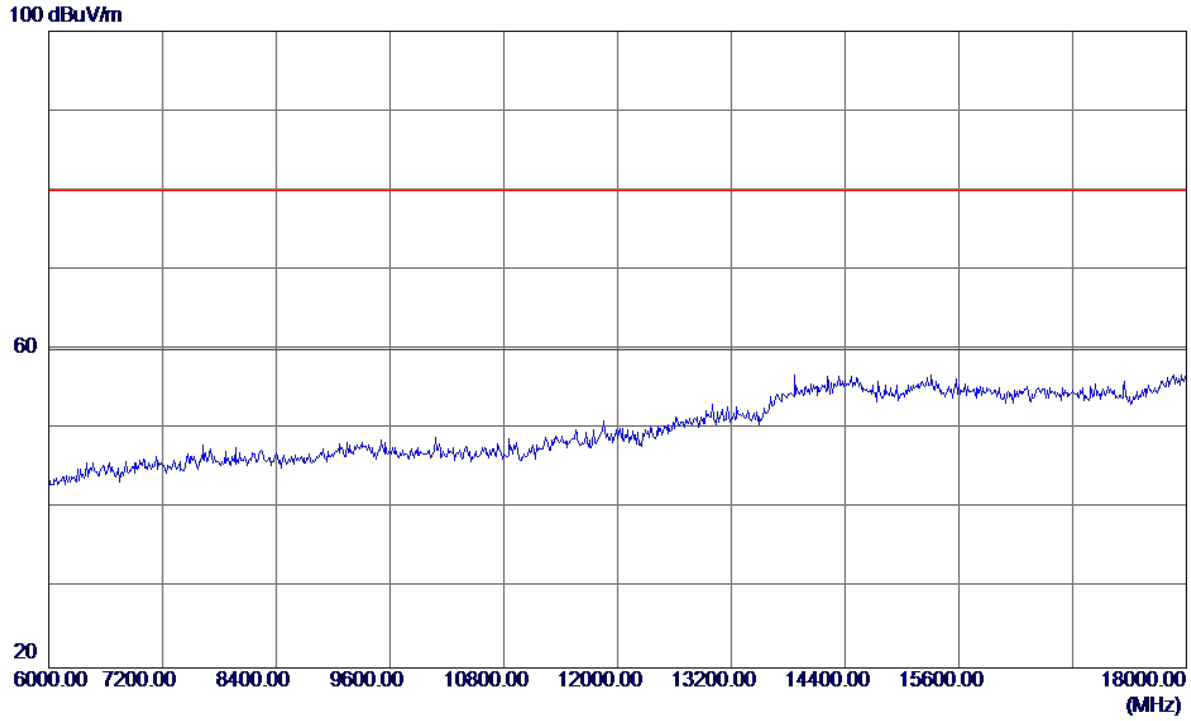


| No. | Freq. | Reading Level | Correct Factor | Measure ment | Limit | Margin | | |
|---|---|---|---|---|---|---|---|---|
| | MHz | dBuV/m | dB | dBuV/m | dBuV/m | dB | Detector | Comment |

| | |
|---|---|
| Orthogonal Axis : | X |
| Test Mode : | UNII-2C/ TX N40 Mode 5670MHz |


**Horizontal**

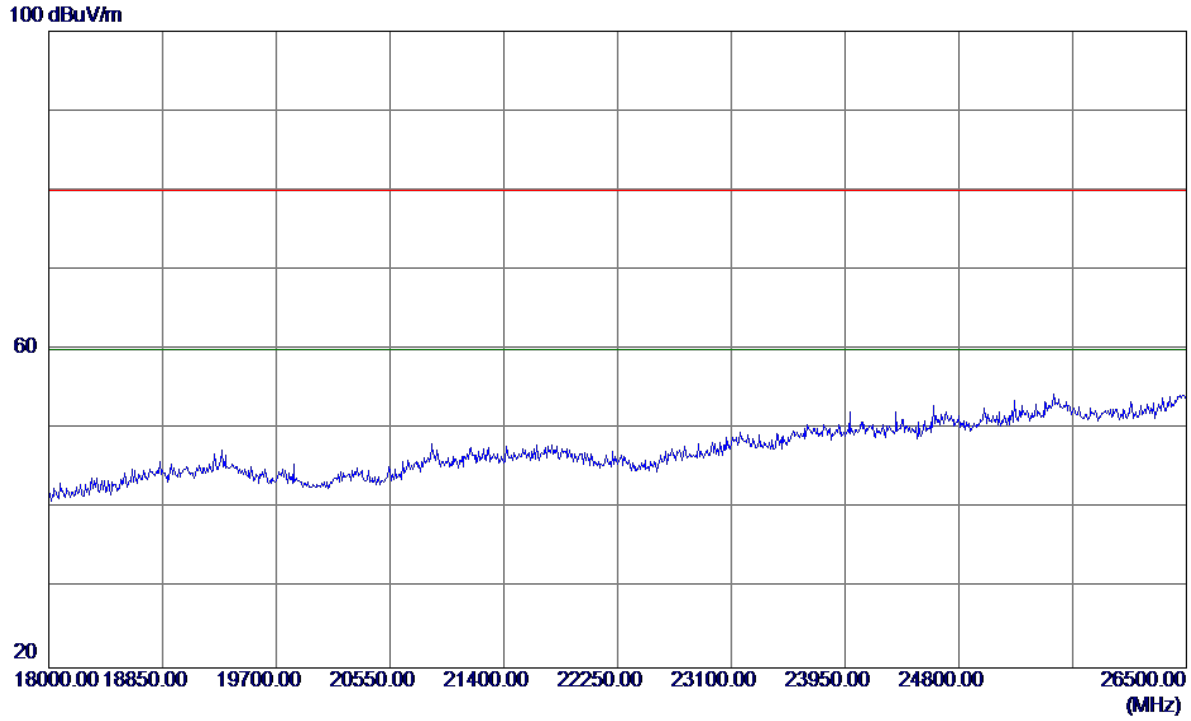


| No. | Freq. | Reading Level | Correct Factor | Measure ment | Limit | Margin | | |
|---|---|---|---|---|---|---|---|---|
| | MHz | dBuV/m | dB | dBuV/m | dBuV/m | dB | Detector | Comment |

| | |
|---|---|
| Orthogonal Axis : | X |
| Test Mode : | UNII-2C/ TX N40 Mode 5670MHz |


**Horizontal**

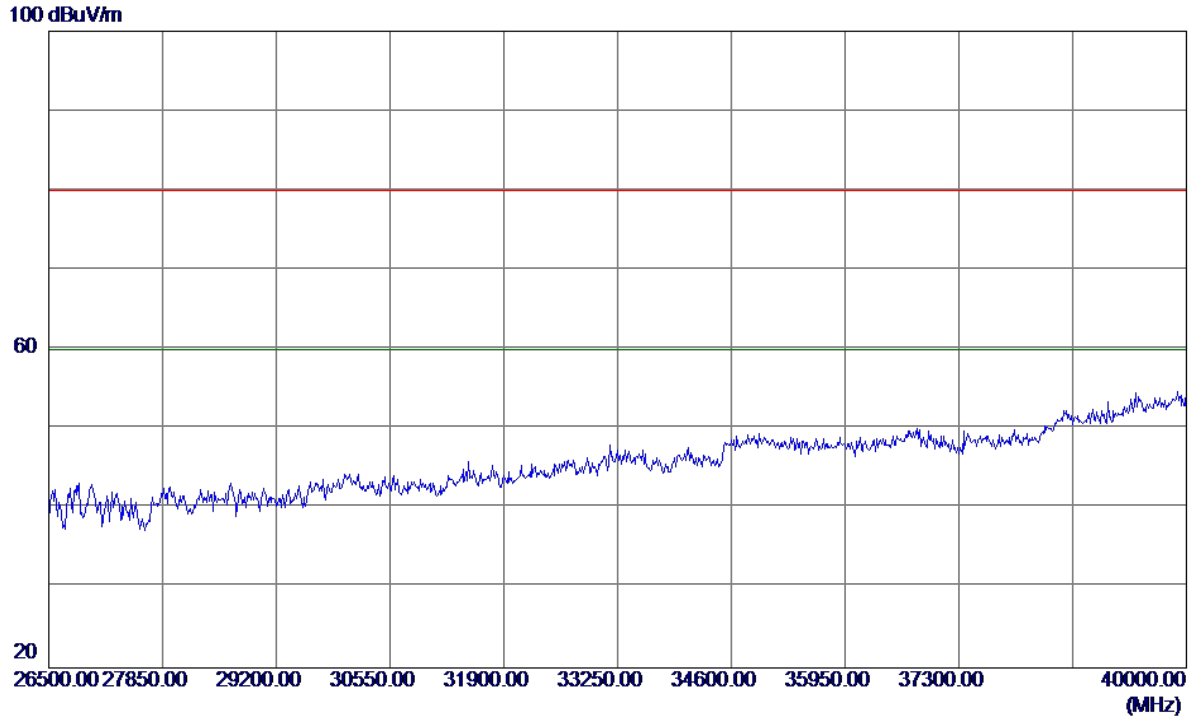


| No. | Freq. | Reading Level | Correct Factor | Measure ment | Limit | Margin | | |
|---|---|---|---|---|---|---|---|---|
| | MHz | dBuV/m | dB | dBuV/m | dBuV/m | dB | Detector | Comment |

| | |
|---|---|
| Orthogonal Axis: | X |
| Test Mode: | UNII-3/TX A Mode 5745MHz |


**Vertical**

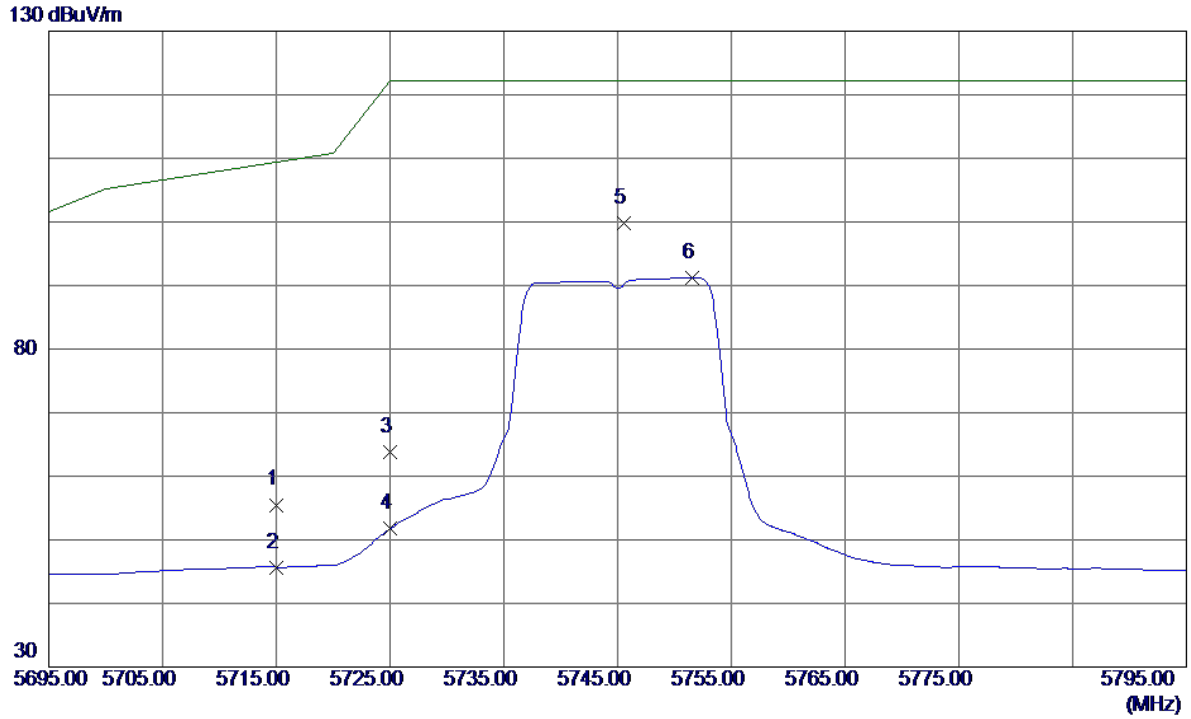


| No. | Freq. | Reading Level | Correct Factor | Measure ment | Limit | Margin | | |
|---|---|---|---|---|---|---|---|---|
| | MHz | dBuV/m | dB | dBuV/m | dBuV/m | dB | Detector | Comment |
| 1 | 5715.0000 | 11.97 | 43.53 | 55.50 | 109.40 | -53.90 | Peak | |
| 2 | 5715.0000 | 2.16 | 43.53 | 45.69 | 109.40 | -63.71 | AVG | |
| 3 | 5725.0000 | 20.27 | 43.56 | 63.83 | 122.20 | -58.37 | Peak | |
| 4 | 5725.0000 | 8.18 | 43.56 | 51.74 | 122.20 | -70.46 | AVG | |
| 5 * | 5745.6000 | 56.26 | 43.62 | 99.88 | 122.20 | -22.32 | Peak | |
| 6 | 5751.6000 | 47.58 | 43.64 | 91.22 | 122.20 | -30.98 | AVG | |

| | |
|---|---|
| Orthogonal Axis: | X |
| Test Mode: | UNII-3/TX A Mode 5745MHz |


**Vertical**

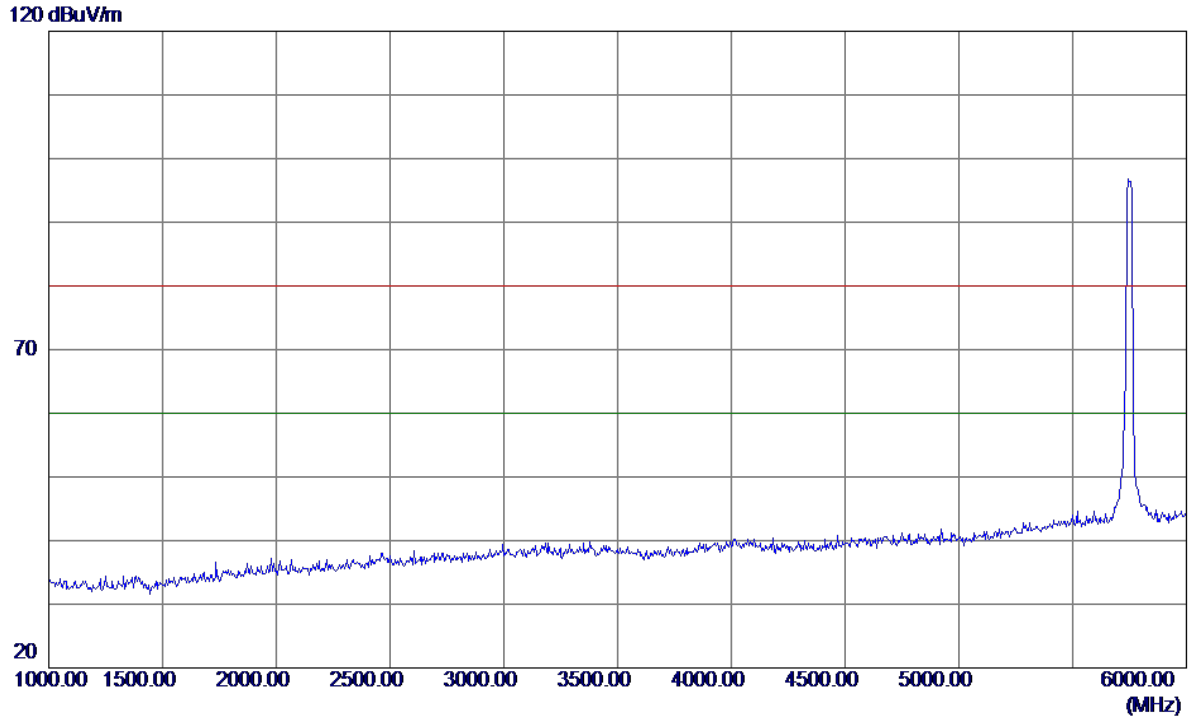


| No. | Freq. | Reading Level | Correct Factor | Measure ment | Limit | Margin | | |
|---|---|---|---|---|---|---|---|---|
| | MHz | dBuV/m | dB | dBuV/m | dBuV/m | dB | Detector | Comment |

| | |
|---|---|
| Orthogonal Axis: | X |
| Test Mode: | UNII-3/TX A Mode 5745MHz |


**Vertical**

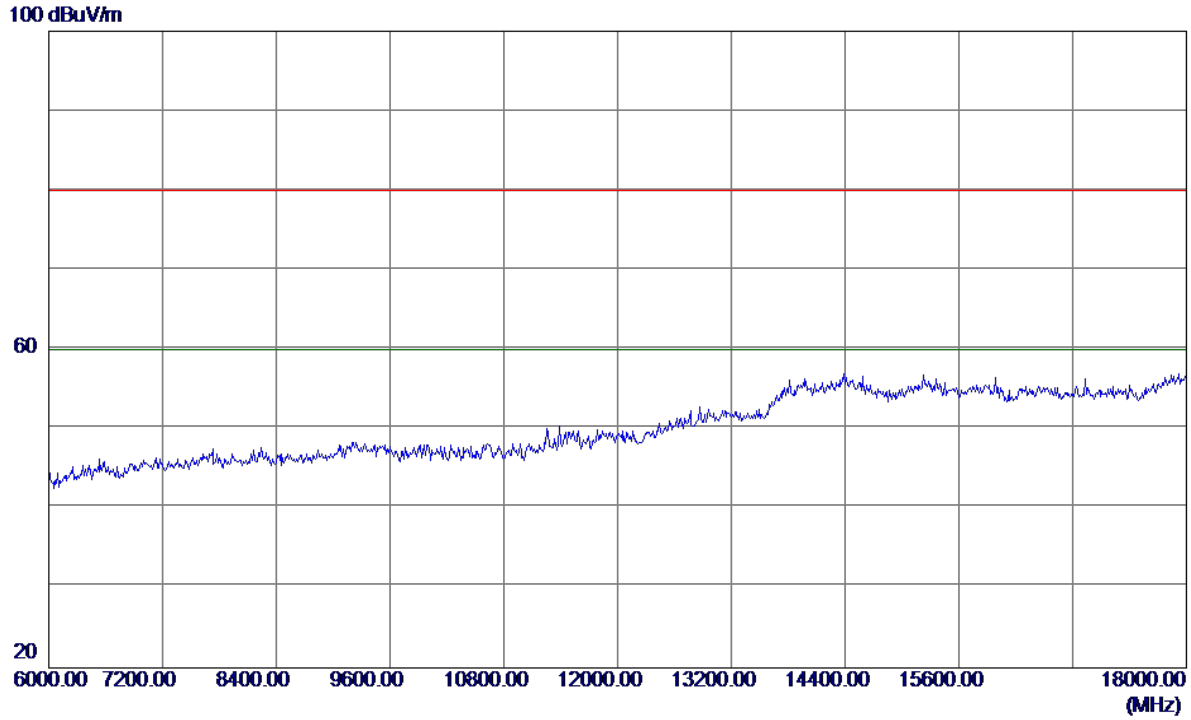


| No. | Freq. | Reading Level | Correct Factor | Measure ment | Limit | Margin | | |
|---|---|---|---|---|---|---|---|---|
| | MHz | dBuV/m | dB | dBuV/m | dBuV/m | dB | Detector | Comment |

| | |
|---|---|
| Orthogonal Axis: | X |
| Test Mode: | UNII-3/TX A Mode 5745MHz |


**Vertical**

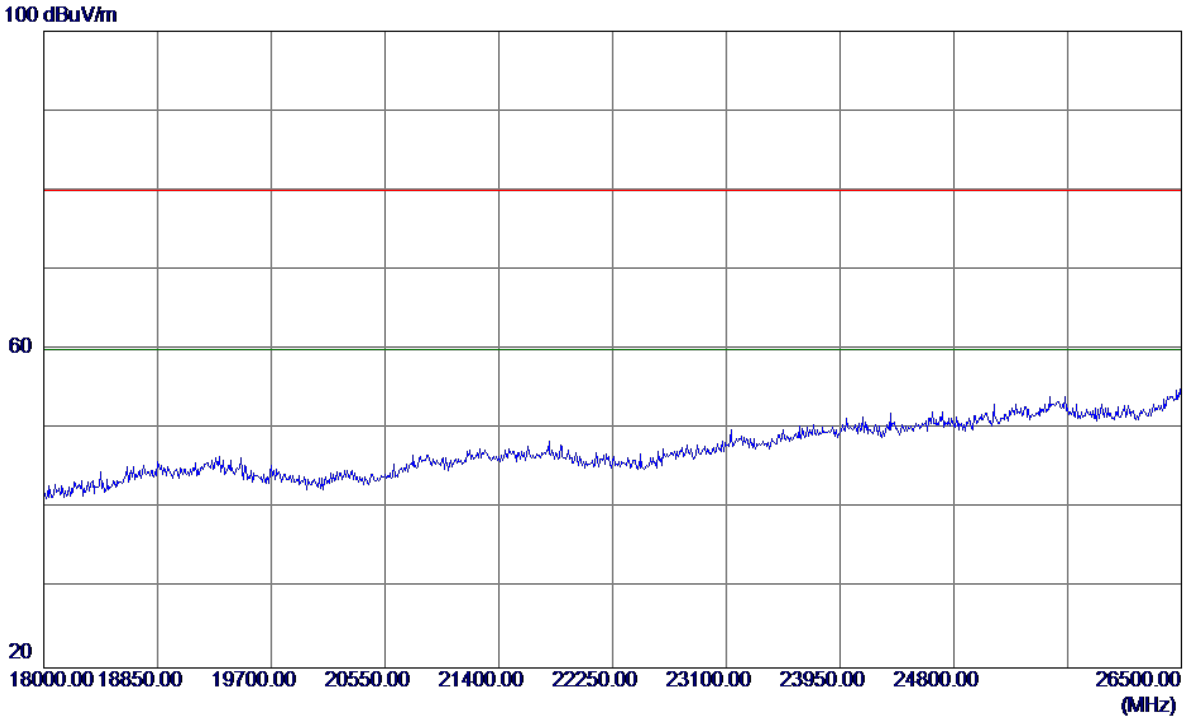


| No. | Freq. | Reading Level | Correct Factor | Measure ment | Limit | Margin | | |
|---|---|---|---|---|---|---|---|---|
| | MHz | dBuV/m | dB | dBuV/m | dBuV/m | dB | Detector | Comment |

| | |
|---|---|
| Orthogonal Axis: | X |
| Test Mode: | UNII-3/TX A Mode 5745MHz |


**Vertical**

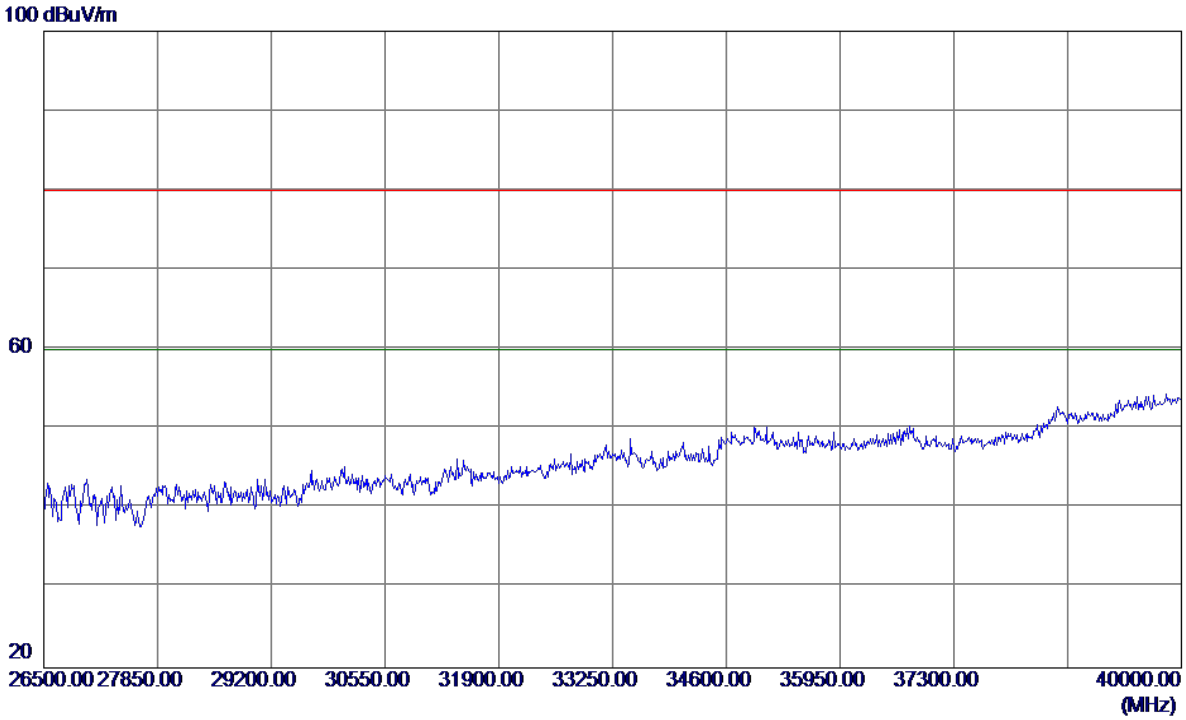


| No. | Freq. | Reading Level | Correct Factor | Measure ment | Limit | Margin | | |
|---|---|---|---|---|---|---|---|---|
| | MHz | dBuV/m | dB | dBuV/m | dBuV/m | dB | Detector | Comment |

| | |
|---|---|
| Orthogonal Axis: | X |
| Test Mode: | UNII-3/TX A Mode 5745MHz |


**Horizontal**

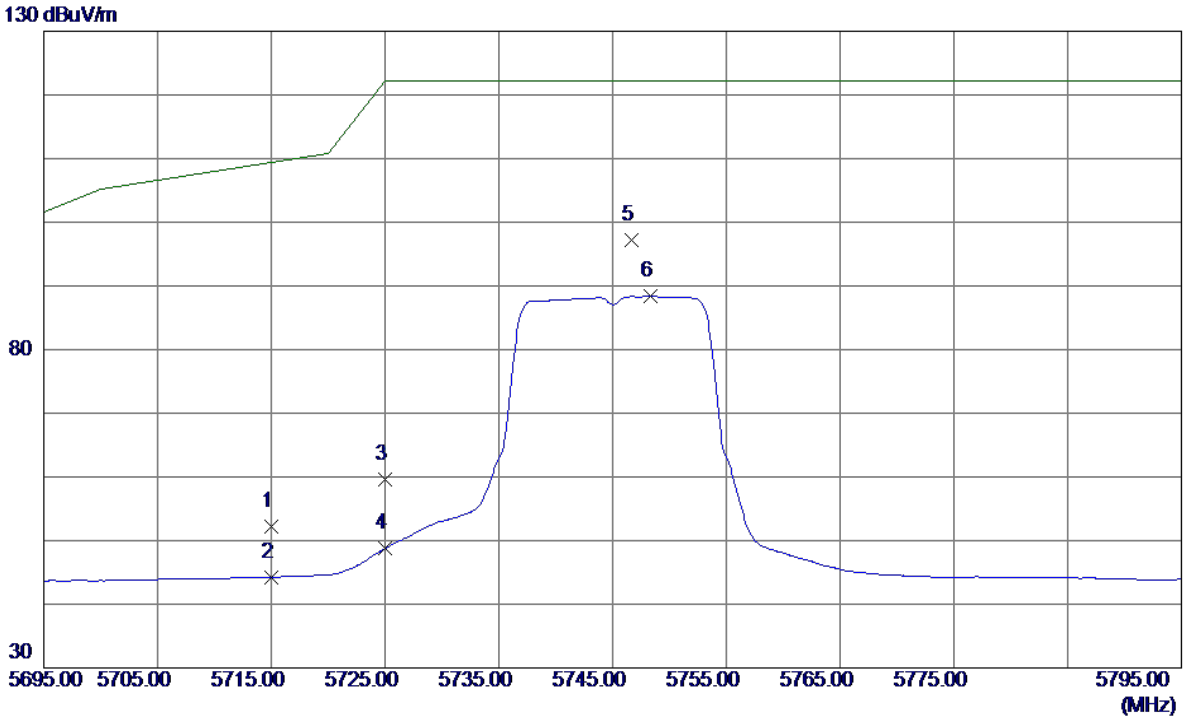


| No. | Freq. | Reading Level | Correct Factor | Measure ment | Limit | Margin | | |
|---|---|---|---|---|---|---|---|---|
| | MHz | dBuV/m | dB | dBuV/m | dBuV/m | dB | Detector | Comment |
| 1 | 5715.0000 | 8.73 | 43.53 | 52.26 | 109.40 | -57.14 | Peak | |
| 2 | 5715.0000 | 0.76 | 43.53 | 44.29 | 109.40 | -65.11 | AVG | |
| 3 | 5725.0000 | 16.06 | 43.56 | 59.62 | 122.20 | -62.58 | Peak | |
| 4 | 5725.0000 | 5.19 | 43.56 | 48.75 | 122.20 | -73.45 | AVG | |
| 5 * | 5746.7000 | 53.56 | 43.62 | 97.18 | 122.20 | -25.02 | Peak | |
| 6 | 5748.3000 | 44.74 | 43.63 | 88.37 | 122.20 | -33.83 | AVG | |

| | |
|---|---|
| Orthogonal Axis: | X |
| Test Mode: | UNII-3/TX A Mode 5745MHz |


**Horizontal**

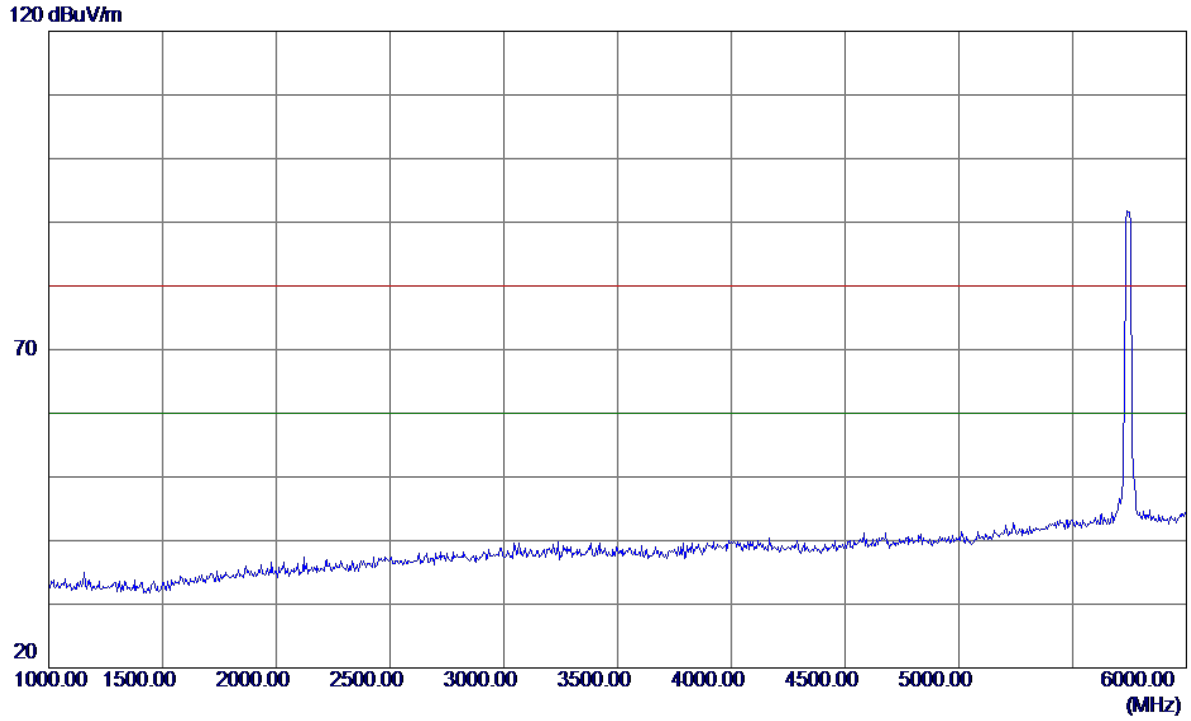


| No. | Freq. | Reading Level | Correct Factor | Measure ment | Limit | Margin | | |
|---|---|---|---|---|---|---|---|---|
| | MHz | dBuV/m | dB | dBuV/m | dBuV/m | dB | Detector | Comment |

| | |
|---|---|
| Orthogonal Axis: | X |
| Test Mode: | UNII-3/TX A Mode 5745MHz |


**Horizontal**

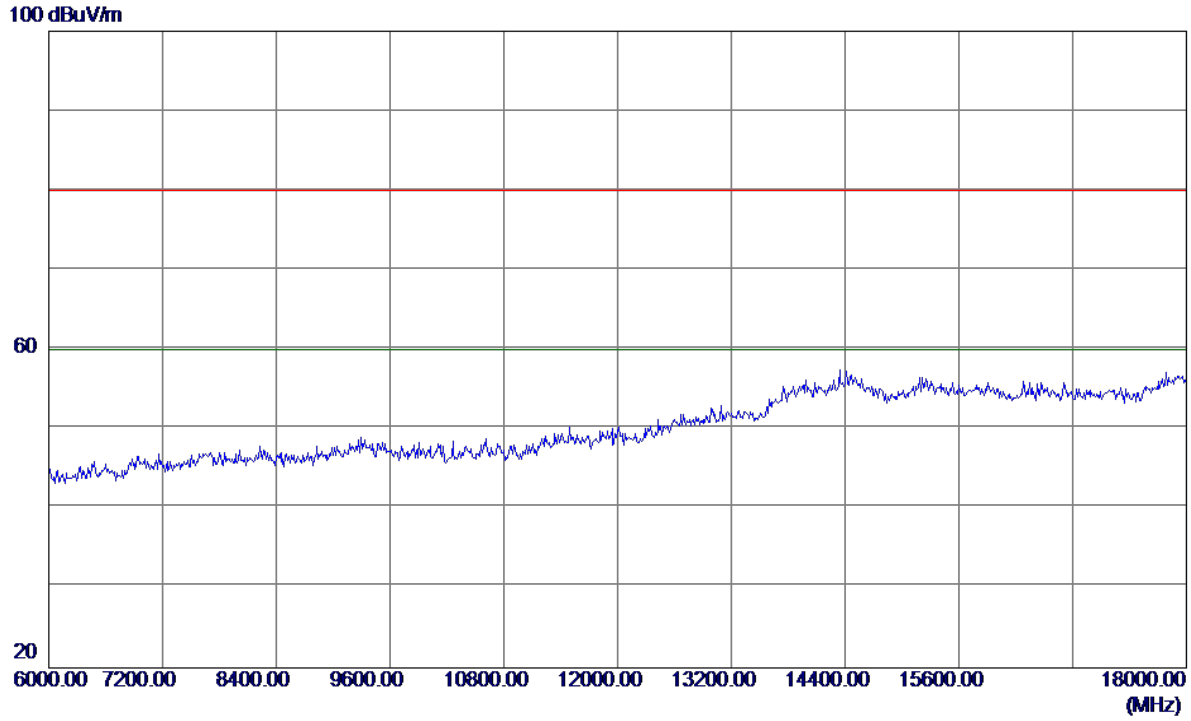


| No. | Freq. | Reading Level | Correct Factor | Measure ment | Limit | Margin | | |
|---|---|---|---|---|---|---|---|---|
| | MHz | dBuV/m | dB | dBuV/m | dBuV/m | dB | Detector | Comment |

| | |
|---|---|
| Orthogonal Axis: | X |
| Test Mode: | UNII-3/TX A Mode 5745MHz |


**Horizontal**

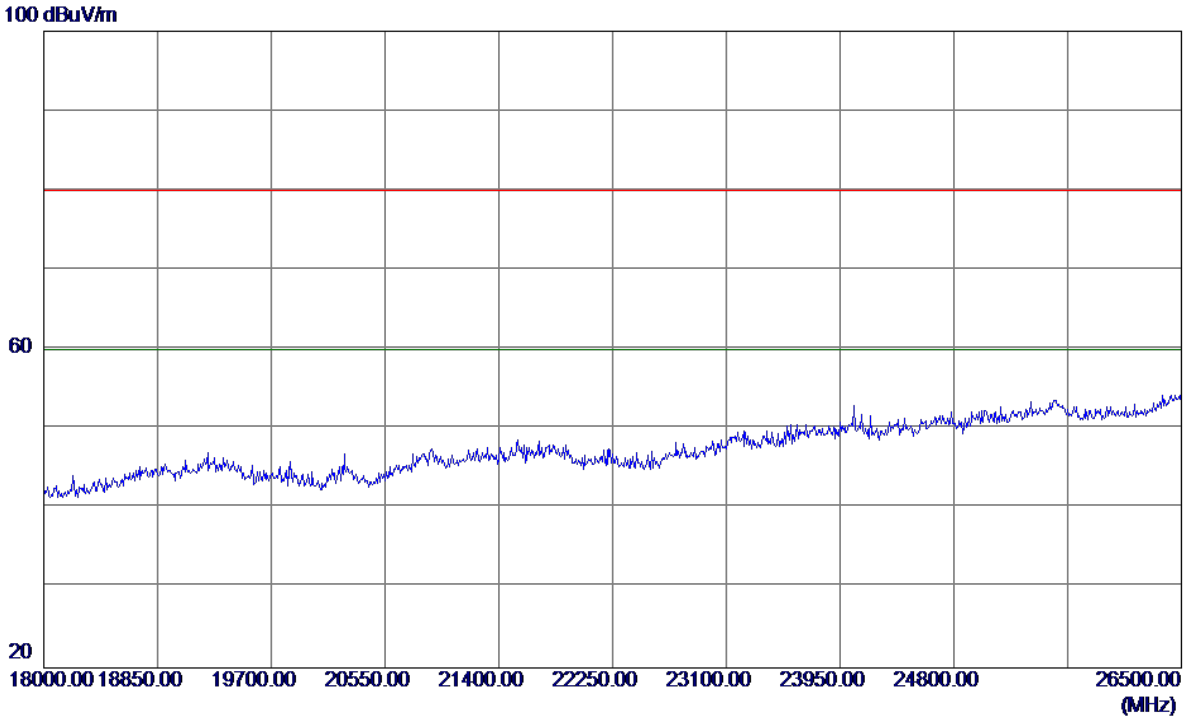


| No. | Freq. | Reading Level | Correct Factor | Measure ment | Limit | Margin | | |
|---|---|---|---|---|---|---|---|---|
| | MHz | dBuV/m | dB | dBuV/m | dBuV/m | dB | Detector | Comment |

| | |
|---|---|
| Orthogonal Axis: | X |
| Test Mode: | UNII-3/TX A Mode 5745MHz |


**Horizontal**

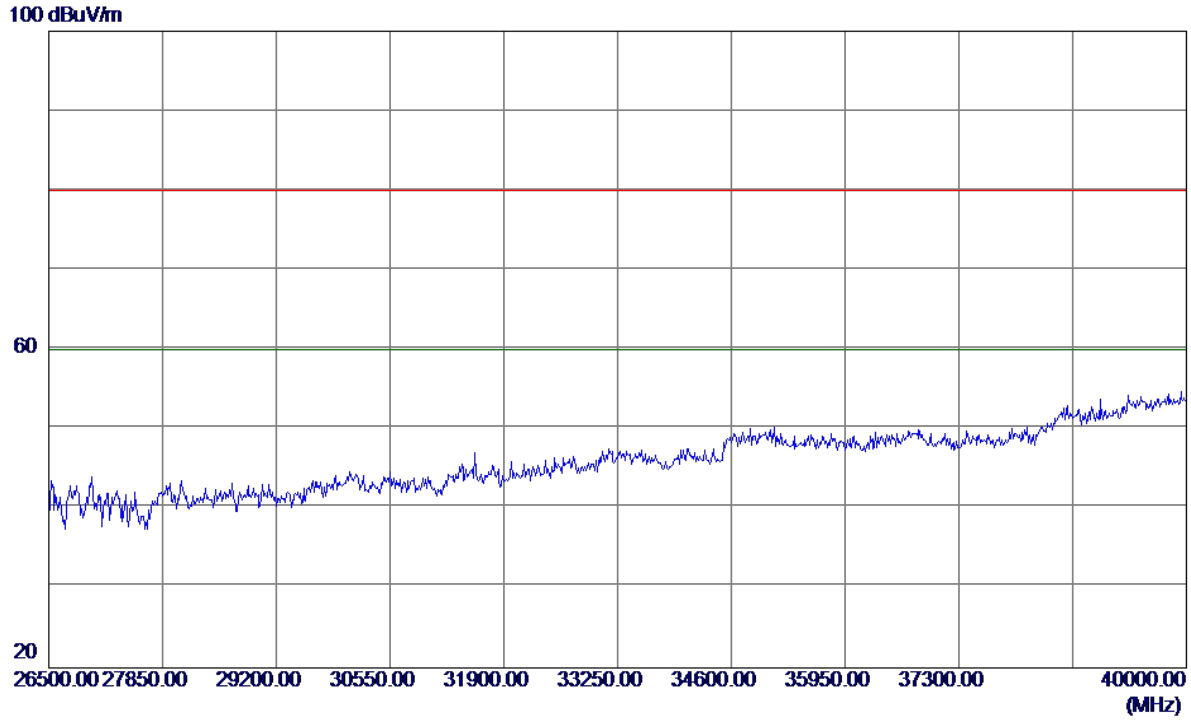


| No. | Freq. | Reading Level | Correct Factor | Measure ment | Limit | Margin | | |
|---|---|---|---|---|---|---|---|---|
| | MHz | dBuV/m | dB | dBuV/m | dBuV/m | dB | Detector | Comment |

| | |
|---|---|
| Orthogonal Axis: | X |
| Test Mode: | UNII-3/TX A Mode 5825MHz |


**Vertical**

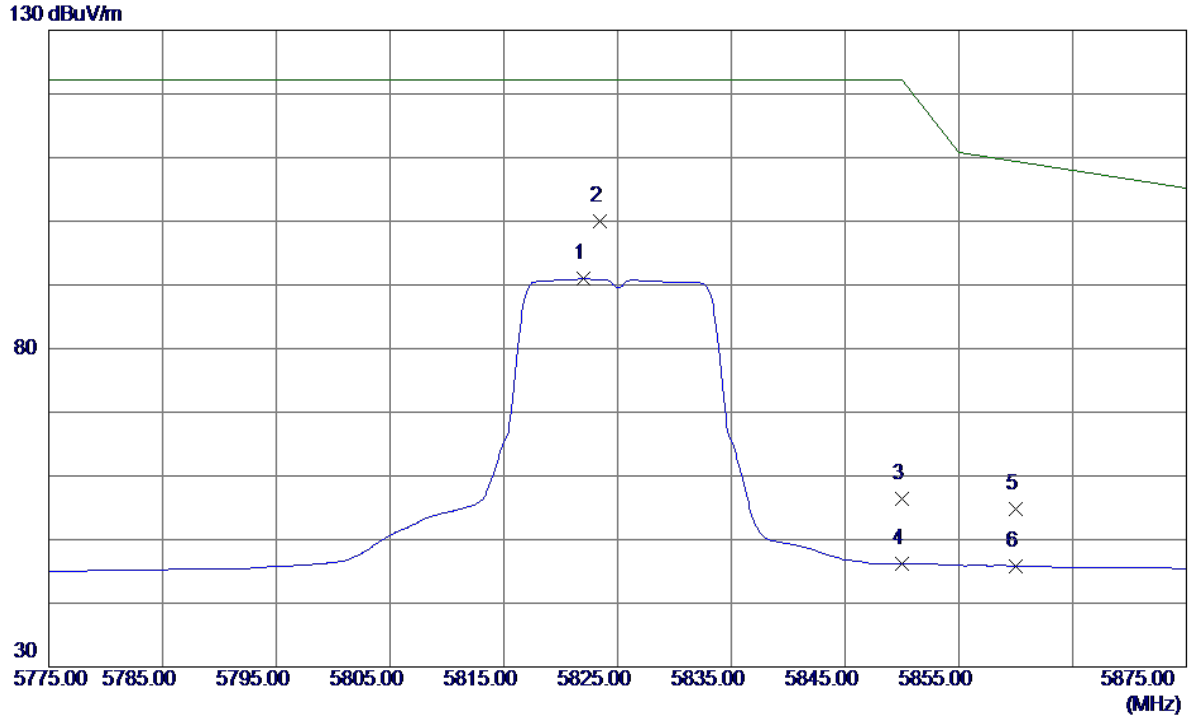


| No. | Freq. | Reading Level | Correct Factor | Measure ment | Limit | Margin | | |
|---|---|---|---|---|---|---|---|---|
| | MHz | dBuV/m | dB | dBuV/m | dBuV/m | dB | Detector | Comment |
| 1 | 5822.0000 | 47.09 | 43.85 | 90.94 | 122.20 | -31.26 | AVG | |
| 2 * | 5823.4000 | 56.04 | 43.86 | 99.90 | 122.20 | -22.30 | Peak | |
| 3 | 5850.0000 | 12.38 | 43.94 | 56.32 | 122.20 | -65.88 | Peak | |
| 4 | 5850.0000 | 2.24 | 43.94 | 46.18 | 122.20 | -76.02 | AVG | |
| 5 | 5860.0000 | 10.76 | 43.97 | 54.73 | 109.40 | -54.67 | Peak | |
| 6 | 5860.0000 | 1.84 | 43.97 | 45.81 | 109.40 | -63.59 | AVG | |

| | |
|---|---|
| Orthogonal Axis: | X |
| Test Mode: | UNII-3/TX A Mode 5825MHz |


**Vertical**

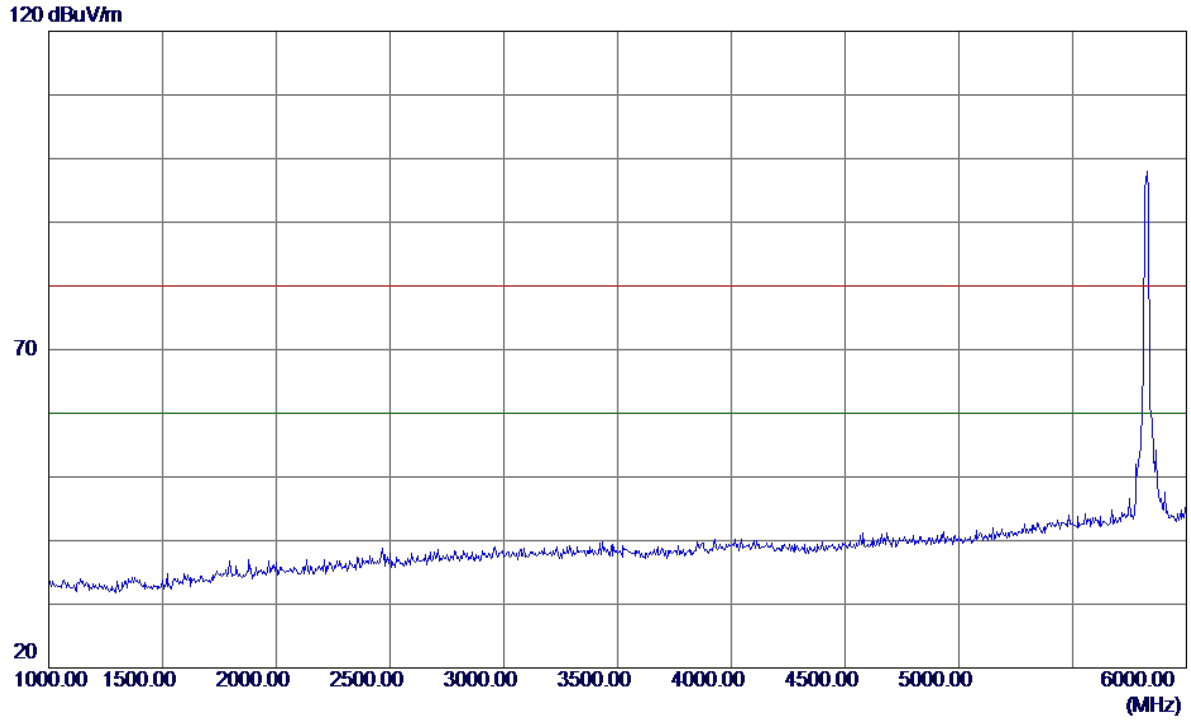


| No. | Freq. | Reading Level | Correct Factor | Measure ment | Limit | Margin | | |
|---|---|---|---|---|---|---|---|---|
| | MHz | dBuV/m | dB | dBuV/m | dBuV/m | dB | Detector | Comment |

| | |
|---|---|
| Orthogonal Axis: | X |
| Test Mode: | UNII-3/TX A Mode 5825MHz |


**Vertical**

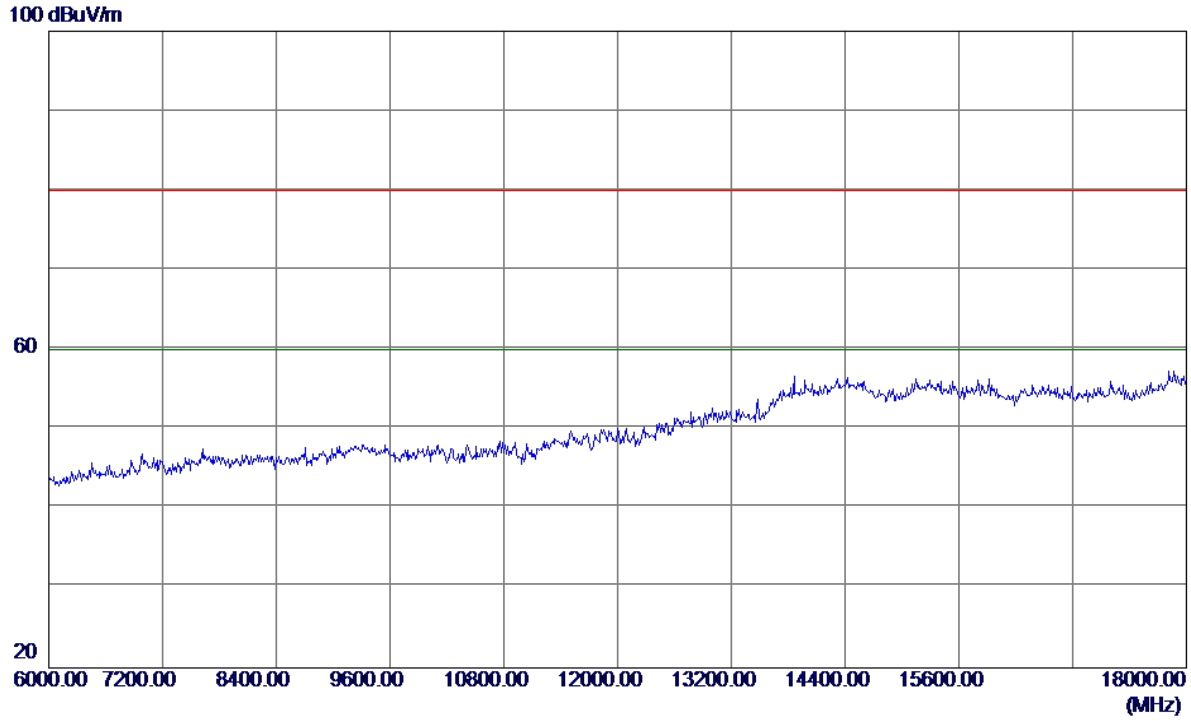


| No. | Freq. | Reading Level | Correct Factor | Measure ment | Limit | Margin | | |
|---|---|---|---|---|---|---|---|---|
| | MHz | dBuV/m | dB | dBuV/m | dBuV/m | dB | Detector | Comment |

| | |
|---|---|
| Orthogonal Axis: | X |
| Test Mode: | UNII-3/TX A Mode 5825MHz |


**Vertical**

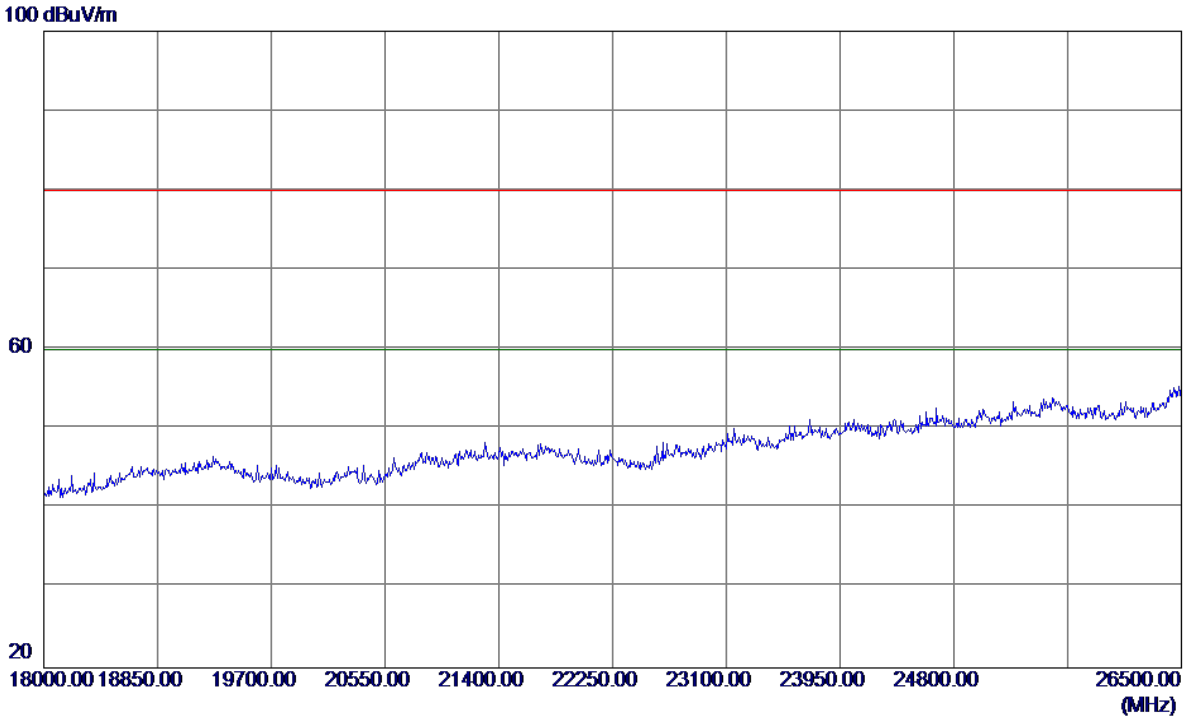


| No. | Freq. | Reading Level | Correct Factor | Measure ment | Limit | Margin | | |
|---|---|---|---|---|---|---|---|---|
| | MHz | dBuV/m | dB | dBuV/m | dBuV/m | dB | Detector | Comment |

| | |
|---|---|
| Orthogonal Axis: | X |
| Test Mode: | UNII-3/TX A Mode 5825MHz |


**Vertical**

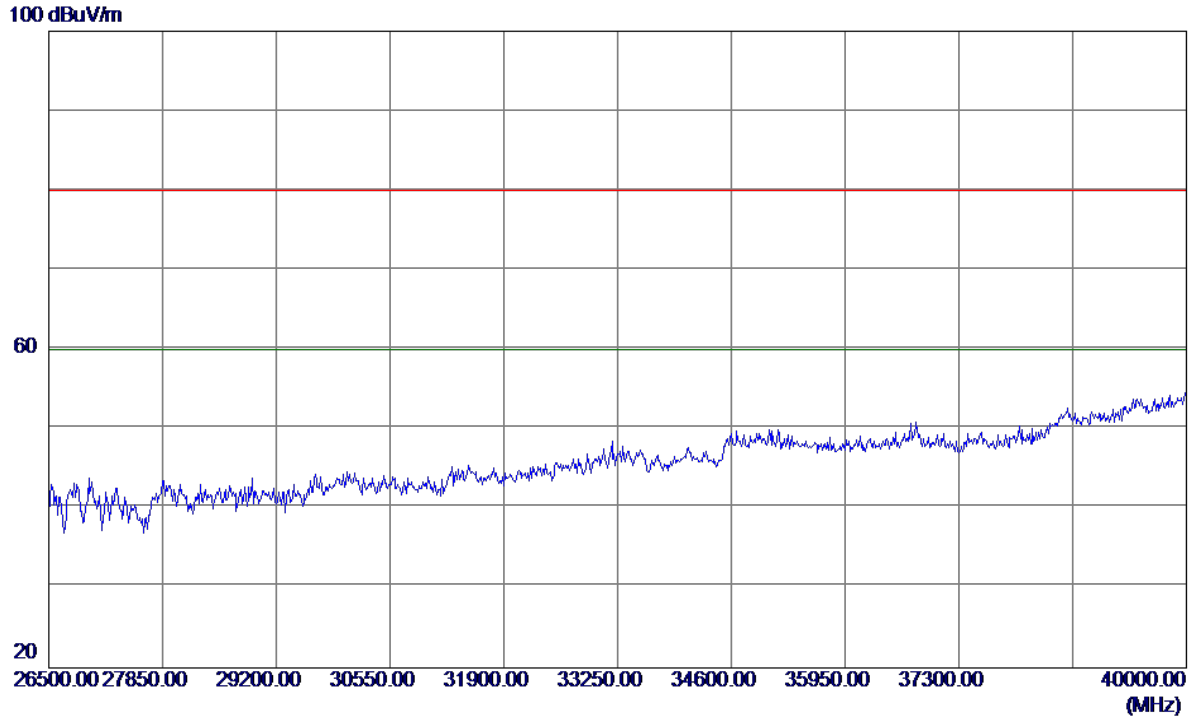


| No. | Freq. | Reading Level | Correct Factor | Measure ment | Limit | Margin | | |
|---|---|---|---|---|---|---|---|---|
| | MHz | dBuV/m | dB | dBuV/m | dBuV/m | dB | Detector | Comment |

| | |
|---|---|
| Orthogonal Axis: | X |
| Test Mode: | UNII-3/TX A Mode 5825MHz |


**Horizontal**

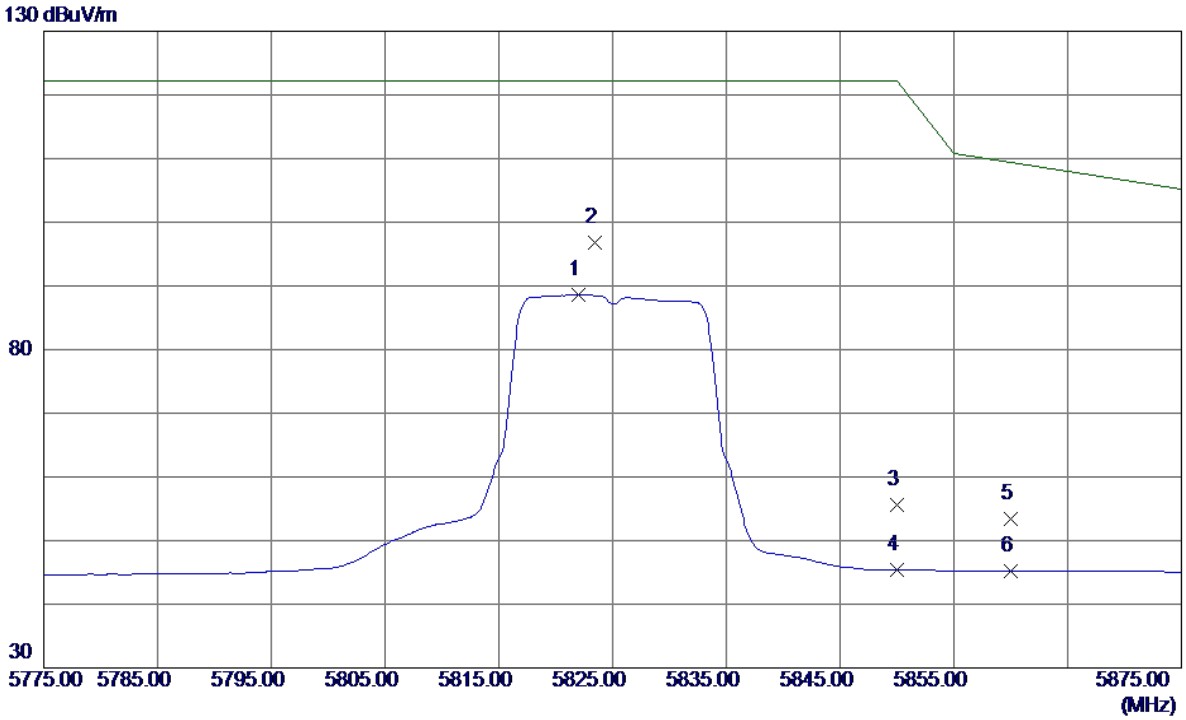


| No. | Freq. | Reading Level | Correct Factor | Measure ment | Limit | Margin | | |
|---|---|---|---|---|---|---|---|---|
| | MHz | dBuV/m | dB | dBuV/m | dBuV/m | dB | Detector | Comment |
| 1 | 5822.0000 | 44.78 | 43.85 | 88.63 | 122.20 | -33.57 | AVG | |
| 2 * | 5823.4000 | 52.94 | 43.86 | 96.80 | 122.20 | -25.40 | Peak | |
| 3 | 5850.0000 | 11.66 | 43.94 | 55.60 | 122.20 | -66.60 | Peak | |
| 4 | 5850.0000 | 1.44 | 43.94 | 45.38 | 122.20 | -76.82 | AVG | |
| 5 | 5860.0000 | 9.46 | 43.97 | 53.43 | 109.40 | -55.97 | Peak | |
| 6 | 5860.0000 | 1.22 | 43.97 | 45.19 | 109.40 | -64.21 | AVG | |

| | |
|---|---|
| Orthogonal Axis: | X |
| Test Mode: | UNII-3/TX A Mode 5825MHz |


**Horizontal**

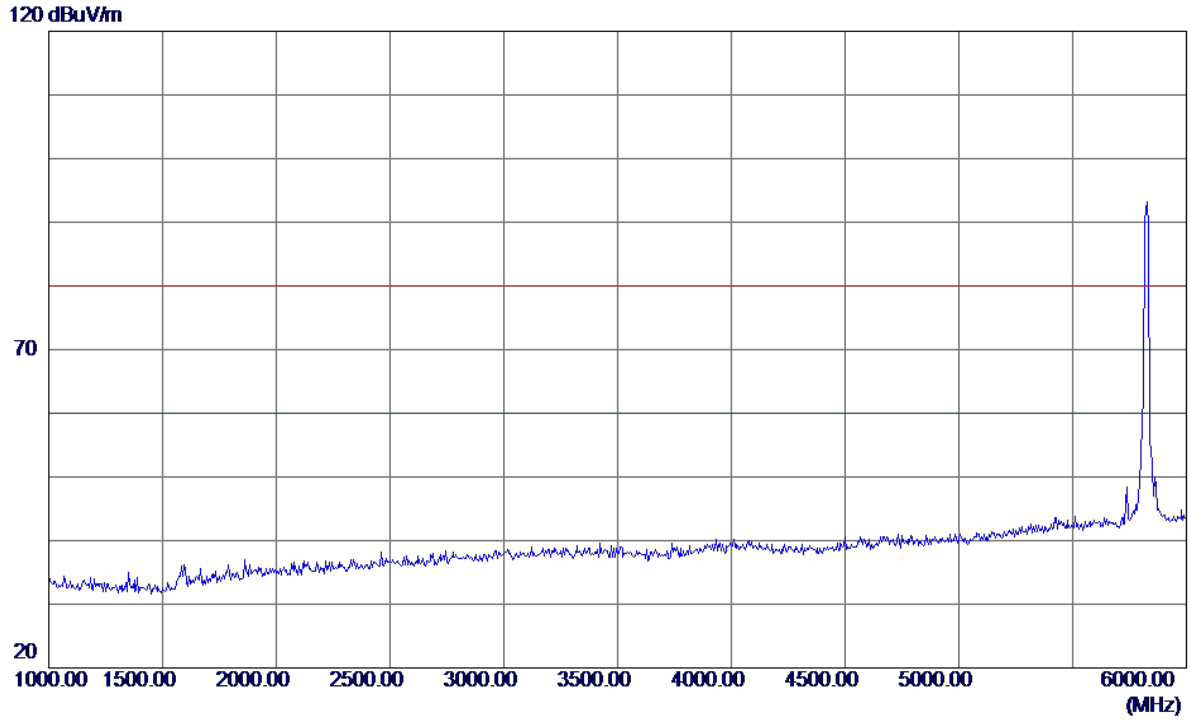


| No. | Freq. | Reading Level | Correct Factor | Measure ment | Limit | Margin | | |
|---|---|---|---|---|---|---|---|---|
| | MHz | dBuV/m | dB | dBuV/m | dBuV/m | dB | Detector | Comment |

| | |
|---|---|
| Orthogonal Axis: | X |
| Test Mode: | UNII-3/TX A Mode 5825MHz |


**Horizontal**

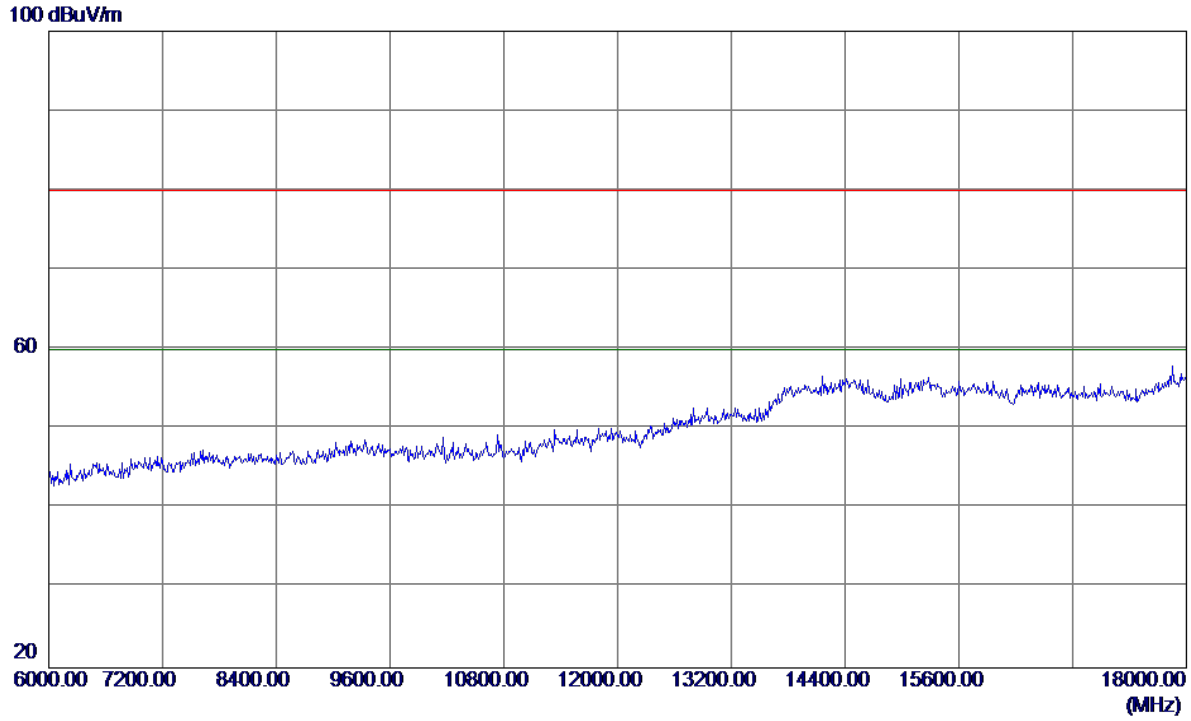


| No. | Freq. | Reading Level | Correct Factor | Measure ment | Limit | Margin | | |
|---|---|---|---|---|---|---|---|---|
| | MHz | dBuV/m | dB | dBuV/m | dBuV/m | dB | Detector | Comment |

| | |
|---|---|
| Orthogonal Axis: | X |
| Test Mode: | UNII-3/TX A Mode 5825MHz |


**Horizontal**

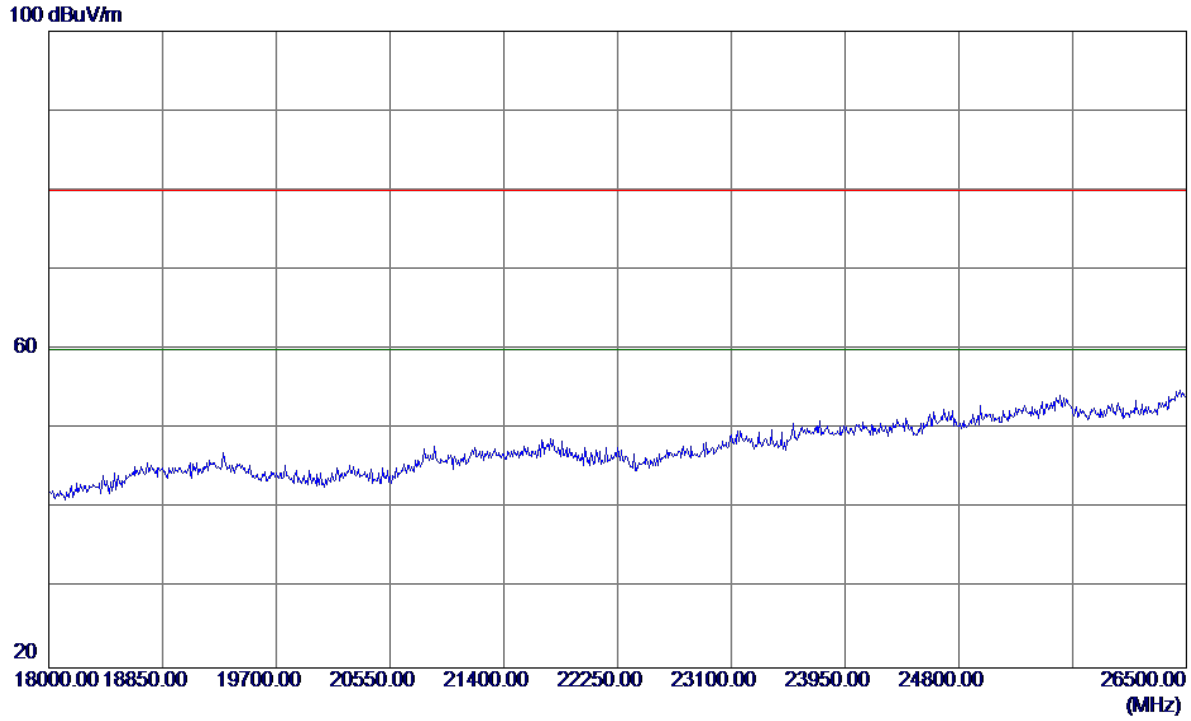


| No. | Freq. | Reading Level | Correct Factor | Measure ment | Limit | Margin | | |
|---|---|---|---|---|---|---|---|---|
| | MHz | dBuV/m | dB | dBuV/m | dBuV/m | dB | Detector | Comment |

| | |
|---|---|
| Orthogonal Axis: | X |
| Test Mode: | UNII-3/TX A Mode 5825MHz |


**Horizontal**

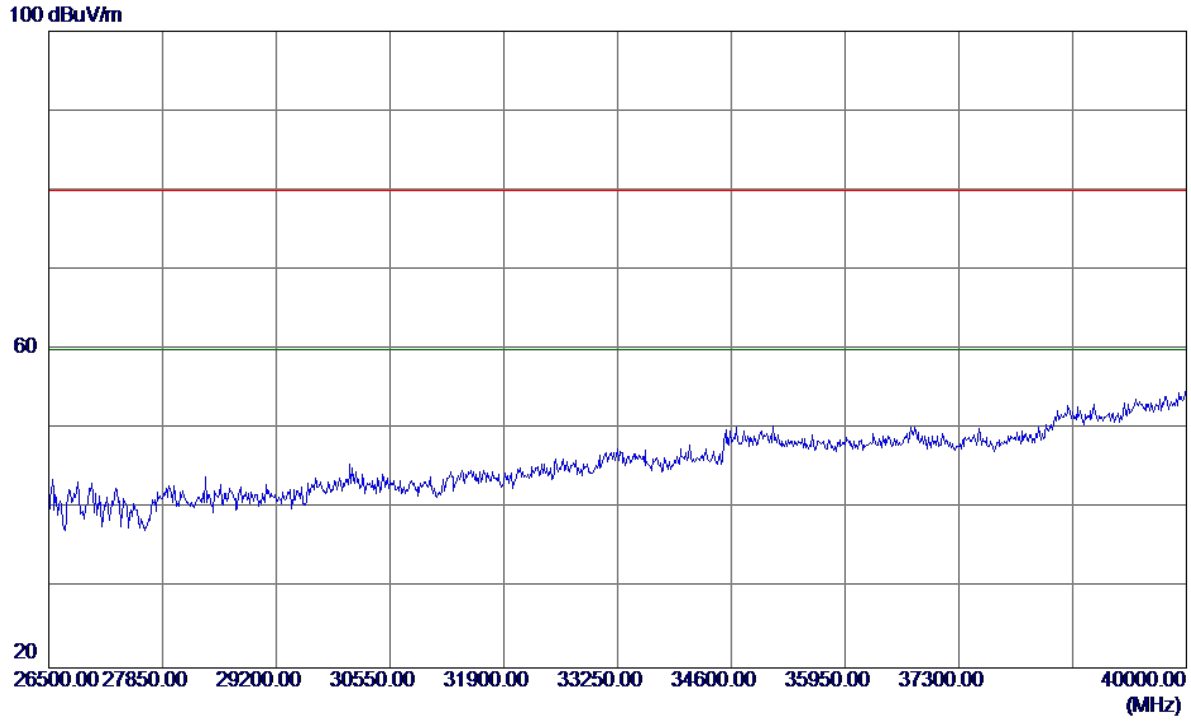


| No. | Freq. | Reading Level | Correct Factor | Measure ment | Limit | Margin | | |
|---|---|---|---|---|---|---|---|---|
| | MHz | dBuV/m | dB | dBuV/m | dBuV/m | dB | Detector | Comment |

| | |
|---|---|
| Orthogonal Axis: | X |
| Test Mode: | UNII-3/TX N20 Mode 5745MHz |


**Vertical**

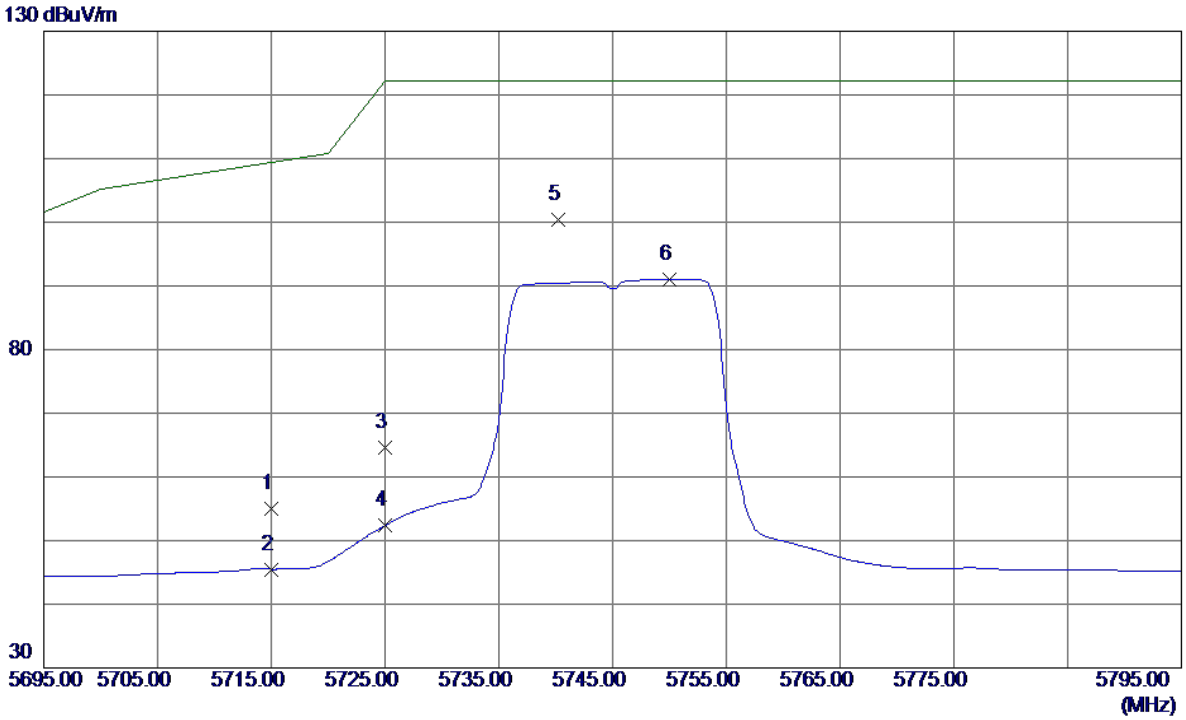


| No. | Freq. | Reading Level | Correct Factor | Measure ment | Limit | Margin | | |
|---|---|---|---|---|---|---|---|---|
| | MHz | dBuV/m | dB | dBuV/m | dBuV/m | dB | Detector | Comment |
| 1 | 5715.0000 | 11.47 | 43.53 | 55.00 | 109.40 | -54.40 | Peak | |
| 2 | 5715.0000 | 1.96 | 43.53 | 45.49 | 109.40 | -63.91 | AVG | |
| 3 | 5725.0000 | 21.00 | 43.56 | 64.56 | 122.20 | -57.64 | Peak | |
| 4 | 5725.0000 | 8.82 | 43.56 | 52.38 | 122.20 | -69.82 | AVG | |
| 5 * | 5740.2000 | 56.83 | 43.61 | 100.44 | 122.20 | -21.76 | Peak | |
| 6 | 5750.0000 | 47.40 | 43.63 | 91.03 | 122.20 | -31.17 | AVG | |

| | |
|---|---|
| Orthogonal Axis: | X |
| Test Mode: | UNII-3/TX N20 Mode 5745MHz |


**Vertical**

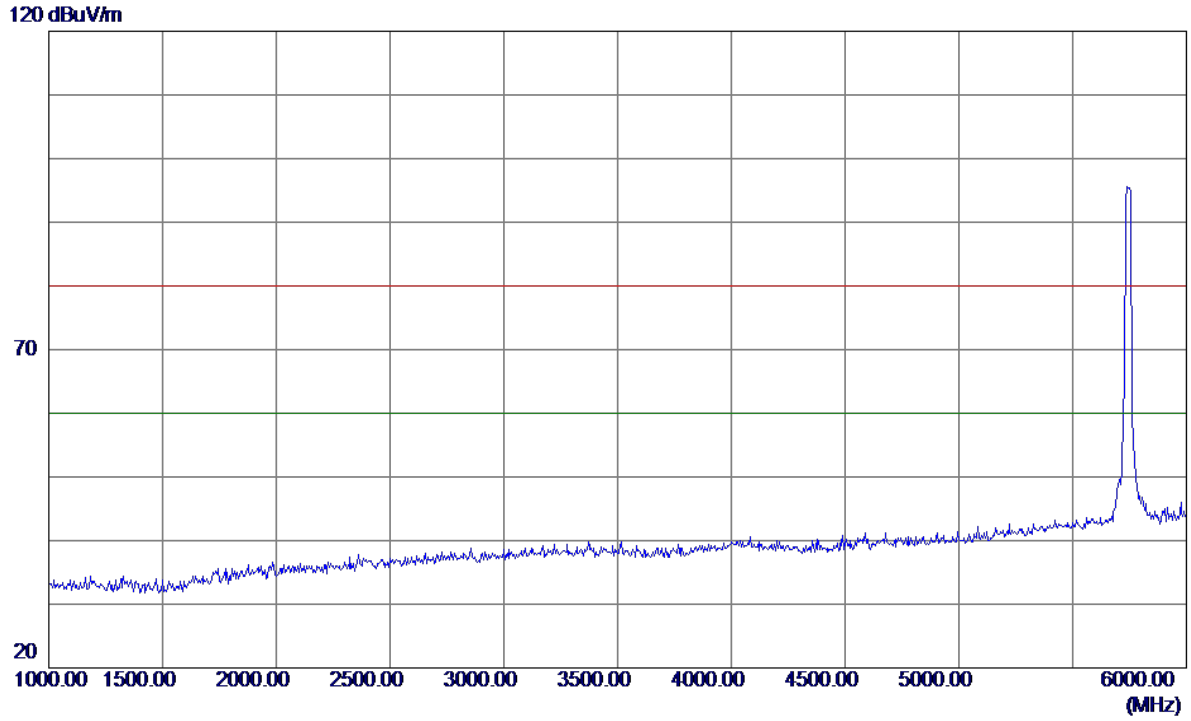


| No. | Freq. | Reading Level | Correct Factor | Measure ment | Limit | Margin | | |
|---|---|---|---|---|---|---|---|---|
| | MHz | dBuV/m | dB | dBuV/m | dBuV/m | dB | Detector | Comment |

| | |
|---|---|
| Orthogonal Axis: | X |
| Test Mode: | UNII-3/TX N20 Mode 5745MHz |


**Vertical**

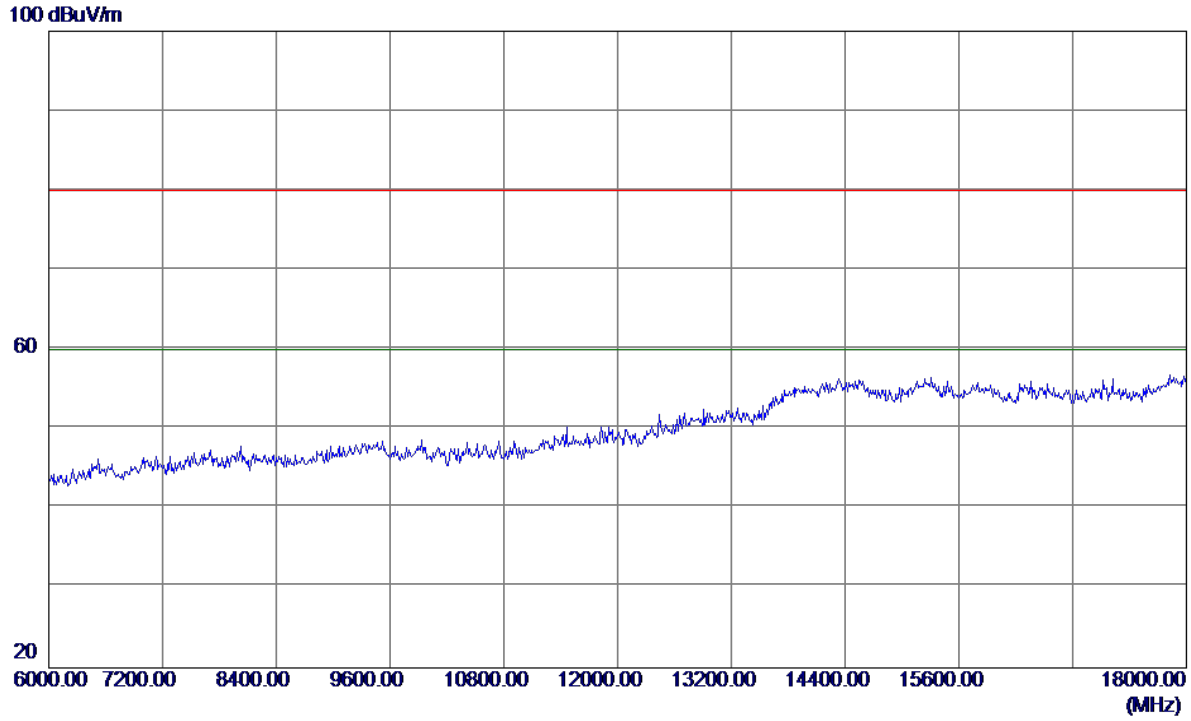


| No. | Freq. | Reading Level | Correct Factor | Measure ment | Limit | Margin | | |
|---|---|---|---|---|---|---|---|---|
| | MHz | dBuV/m | dB | dBuV/m | dBuV/m | dB | Detector | Comment |

| | |
|---|---|
| Orthogonal Axis: | X |
| Test Mode: | UNII-3/TX N20 Mode 5745MHz |


**Vertical**

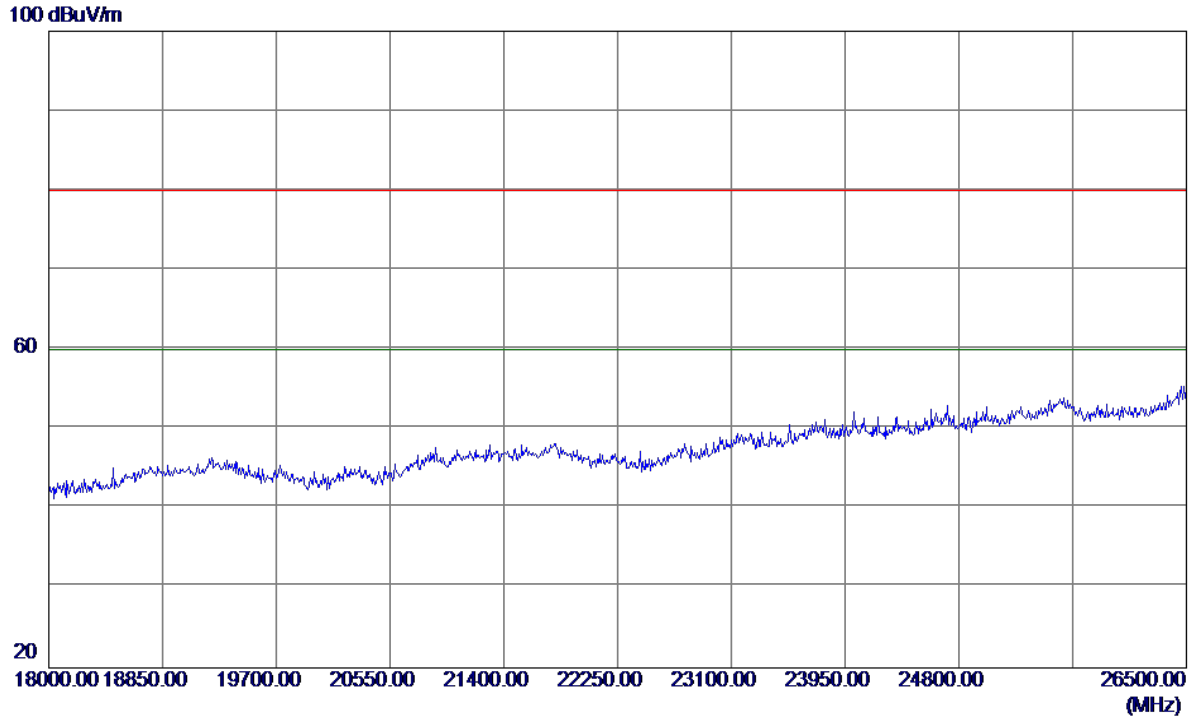


| No. | Freq. | Reading Level | Correct Factor | Measure ment | Limit | Margin | | |
|---|---|---|---|---|---|---|---|---|
| | MHz | dBuV/m | dB | dBuV/m | dBuV/m | dB | Detector | Comment |

| | |
|---|---|
| Orthogonal Axis: | X |
| Test Mode: | UNII-3/TX N20 Mode 5745MHz |


**Vertical**

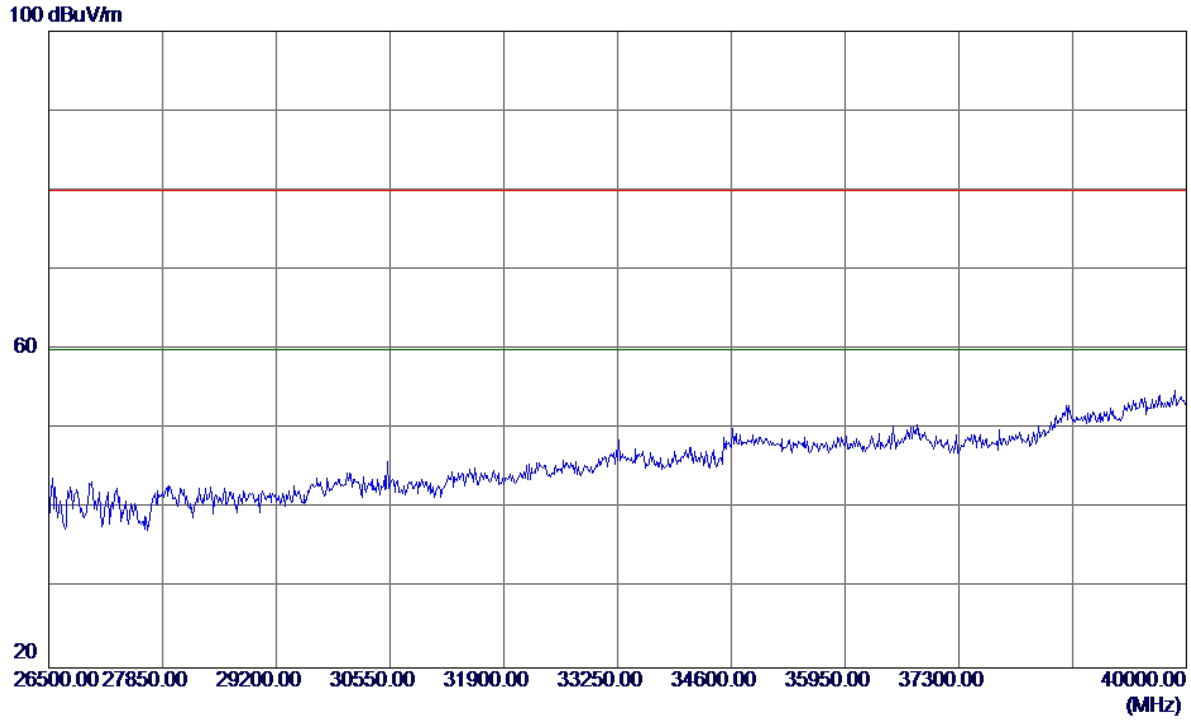


| No. | Freq. | Reading Level | Correct Factor | Measure ment | Limit | Margin | | |
|---|---|---|---|---|---|---|---|---|
| | MHz | dBuV/m | dB | dBuV/m | dBuV/m | dB | Detector | Comment |

| | |
|---|---|
| Orthogonal Axis: | X |
| Test Mode: | UNII-3/TX N20 Mode 5745MHz |


**Horizontal**

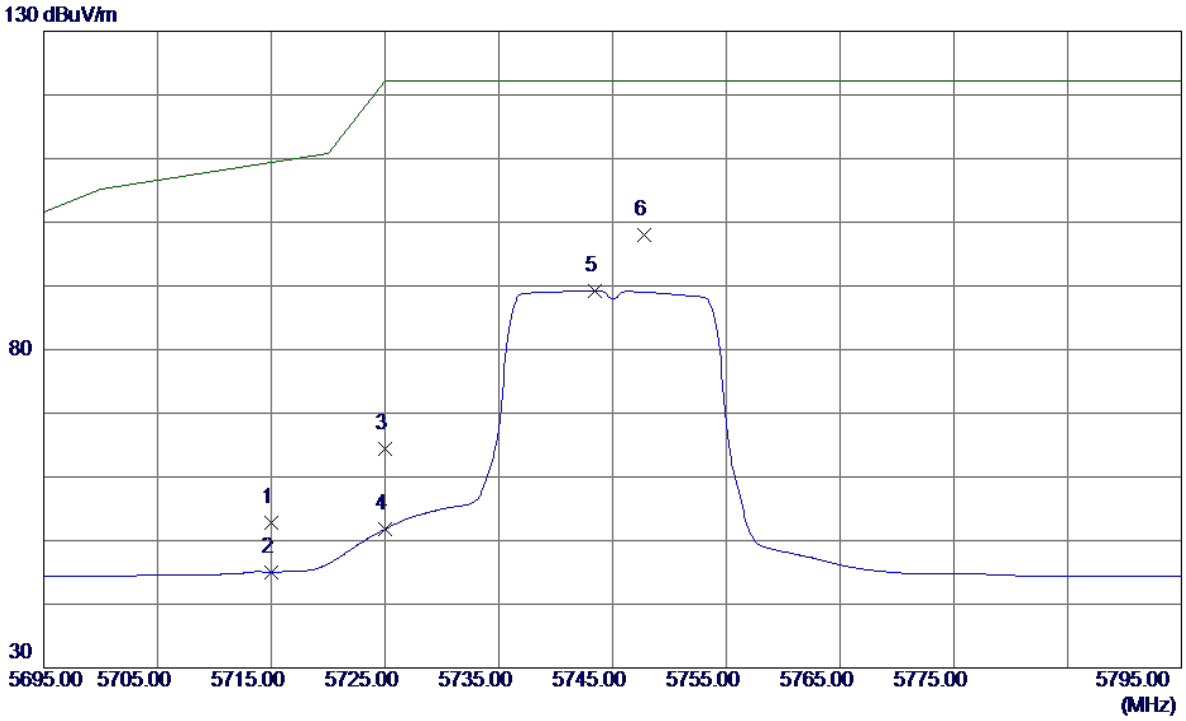


| No. | Freq. | Reading Level | Correct Factor | Measure ment | Limit | Margin | | |
|---|---|---|---|---|---|---|---|---|
| | MHz | dBuV/m | dB | dBuV/m | dBuV/m | dB | Detector | Comment |
| 1 | 5715.0000 | 9.19 | 43.53 | 52.72 | 109.40 | -56.68 | Peak | |
| 2 | 5715.0000 | 1.50 | 43.53 | 45.03 | 109.40 | -64.37 | AVG | |
| 3 | 5725.0000 | 20.86 | 43.56 | 64.42 | 122.20 | -57.78 | Peak | |
| 4 | 5725.0000 | 8.25 | 43.56 | 51.81 | 122.20 | -70.39 | AVG | |
| 5 | 5743.4000 | 45.61 | 43.62 | 89.23 | 122.20 | -32.97 | AVG | |
| 6 * | 5747.8000 | 54.39 | 43.63 | 98.02 | 122.20 | -24.18 | Peak | |

| | |
|---|---|
| Orthogonal Axis: | X |
| Test Mode: | UNII-3/TX N20 Mode 5745MHz |


**Horizontal**

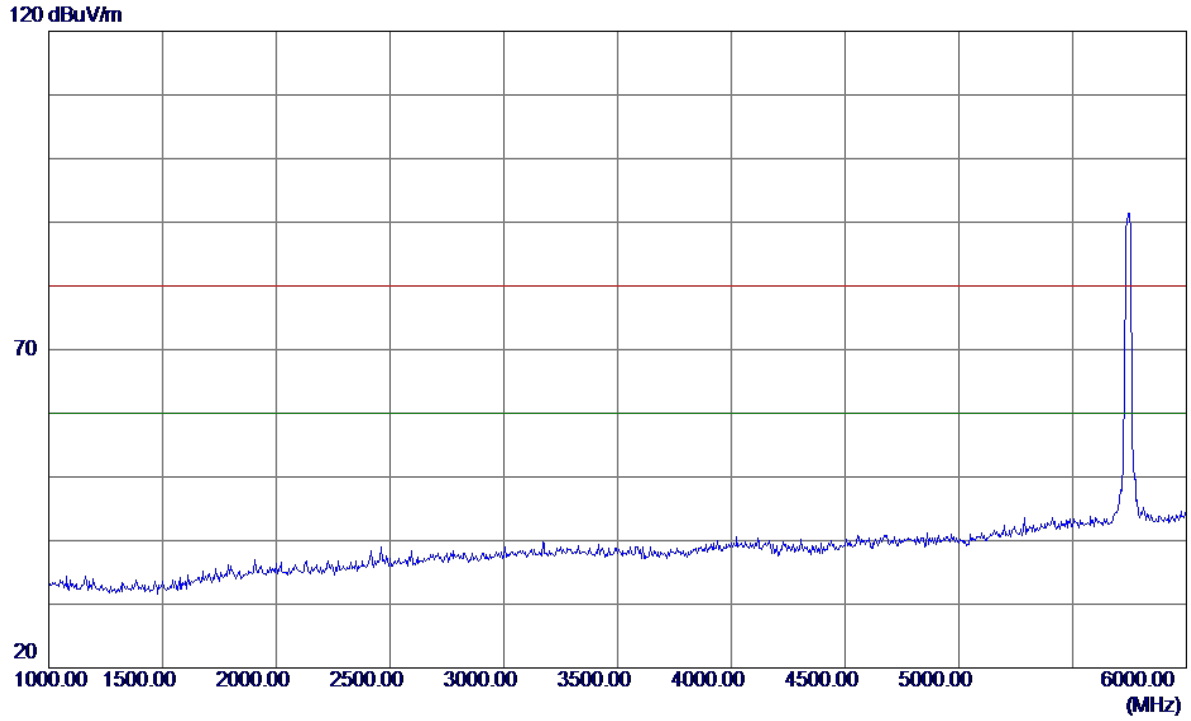


| No. | Freq. | Reading Level | Correct Factor | Measure ment | Limit | Margin | | |
|---|---|---|---|---|---|---|---|---|
| | MHz | dBuV/m | dB | dBuV/m | dBuV/m | dB | Detector | Comment |

| | |
|---|---|
| Orthogonal Axis: | X |
| Test Mode: | UNII-3/TX N20 Mode 5745MHz |


**Horizontal**

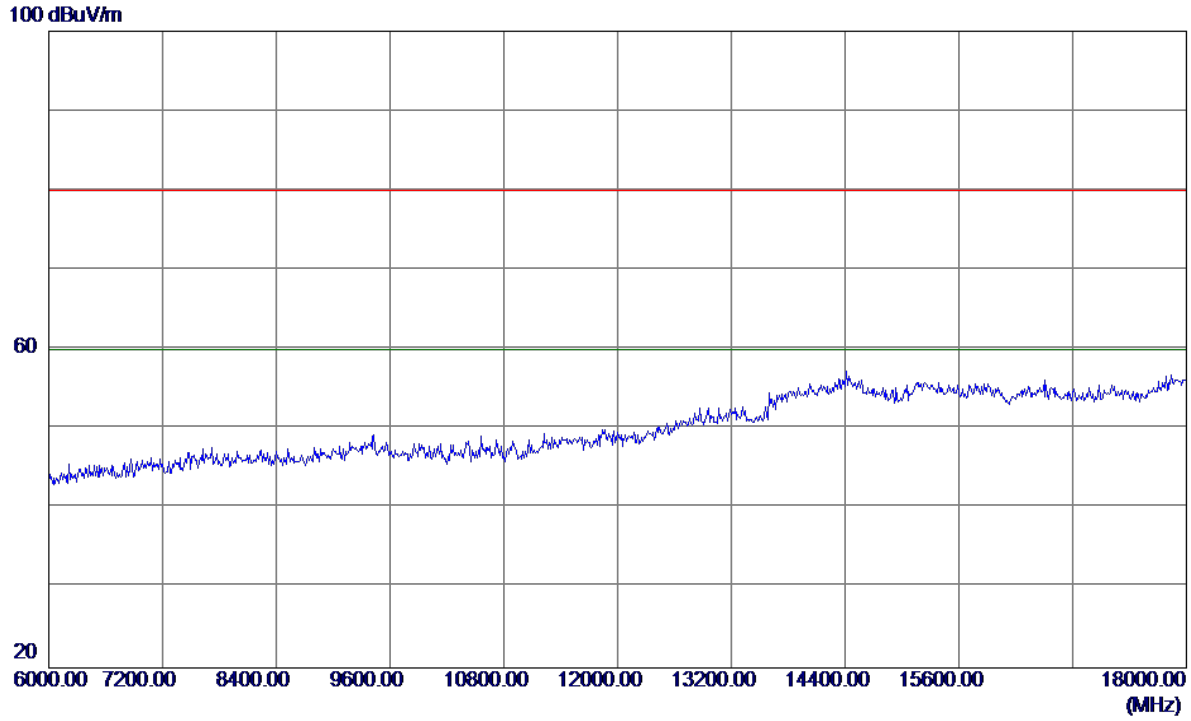


| No. | Freq. | Reading Level | Correct Factor | Measure ment | Limit | Margin | | |
|---|---|---|---|---|---|---|---|---|
| | MHz | dBuV/m | dB | dBuV/m | dBuV/m | dB | Detector | Comment |

| | |
|---|---|
| Orthogonal Axis: | X |
| Test Mode: | UNII-3/TX N20 Mode 5745MHz |


**Horizontal**

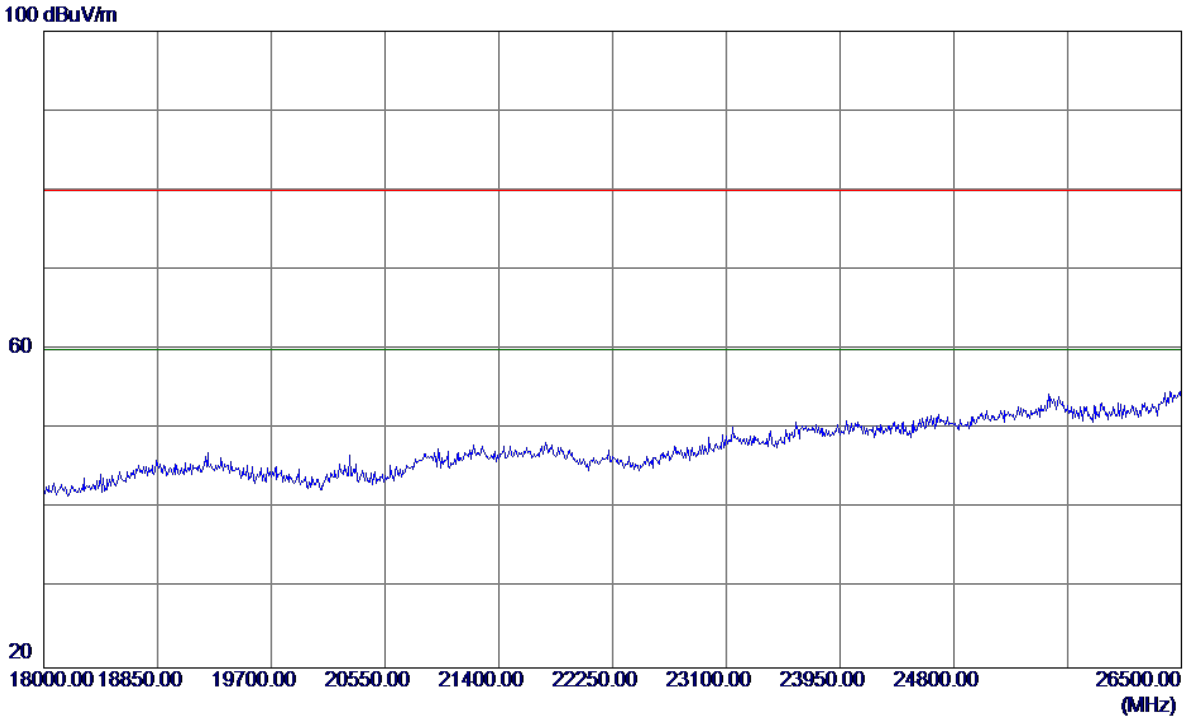


| No. | Freq. | Reading Level | Correct Factor | Measure ment | Limit | Margin | | |
|---|---|---|---|---|---|---|---|---|
| | MHz | dBuV/m | dB | dBuV/m | dBuV/m | dB | Detector | Comment |

| | |
|---|---|
| Orthogonal Axis: | X |
| Test Mode: | UNII-3/TX N20 Mode 5745MHz |


**Horizontal**

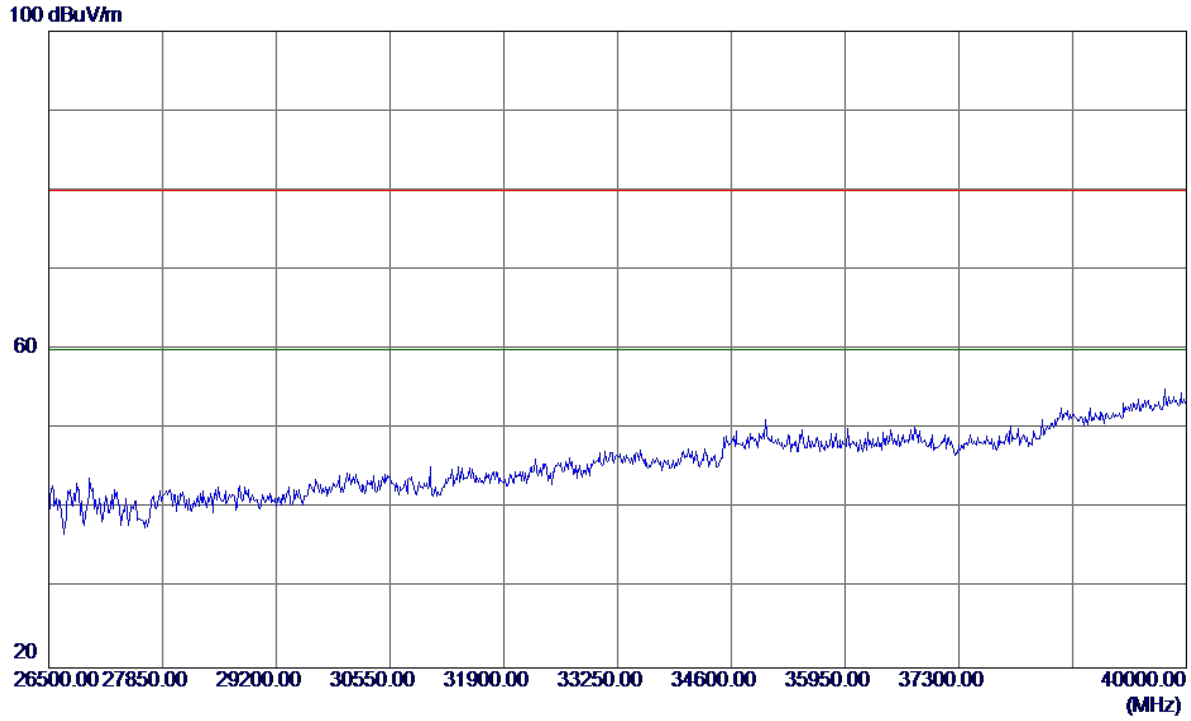


| No. | Freq. | Reading Level | Correct Factor | Measure ment | Limit | Margin | | |
|---|---|---|---|---|---|---|---|---|
| | MHz | dBuV/m | dB | dBuV/m | dBuV/m | dB | Detector | Comment |

| | |
|---|---|
| Orthogonal Axis: | X |
| Test Mode: | UNII-3/TX N20 Mode 5825MHz |


**Vertical**

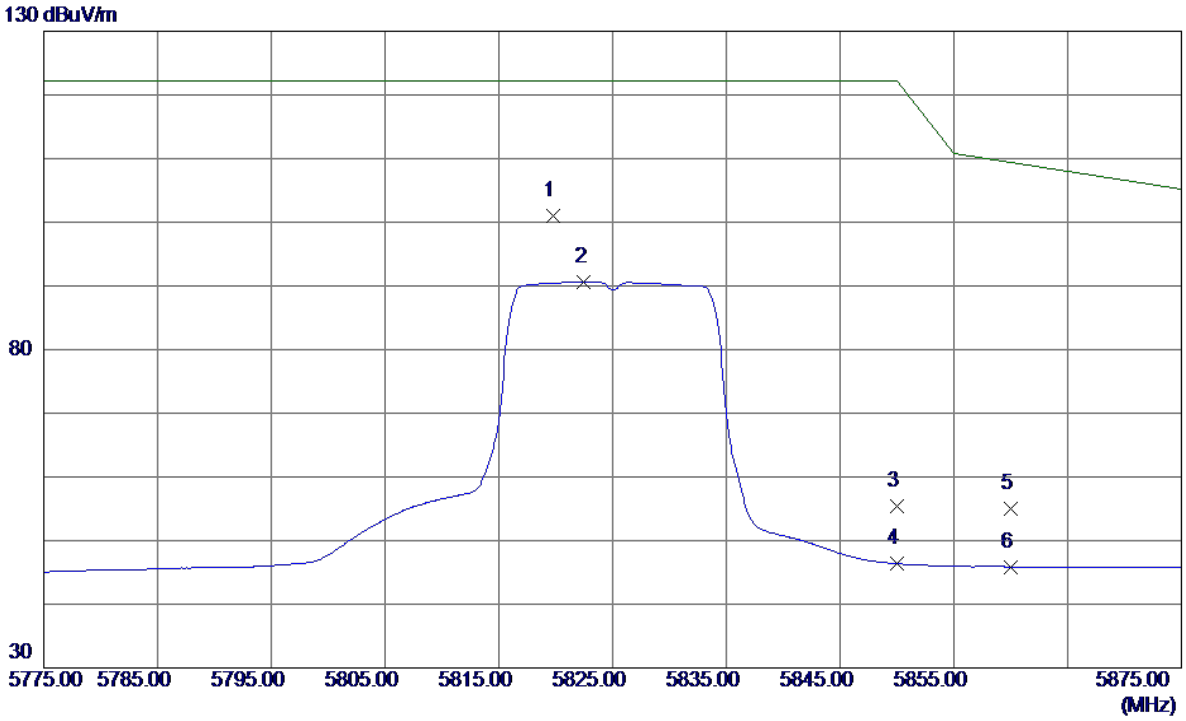


| No. | Freq. | Reading Level | Correct Factor | Measure ment | Limit | Margin | | |
|---|---|---|---|---|---|---|---|---|
| | MHz | dBuV/m | dB | dBuV/m | dBuV/m | dB | Detector | Comment |
| 1 * | 5819.8000 | 57.25 | 43.85 | 101.10 | 122.20 | -21.10 | Peak | |
| 2 | 5822.5000 | 46.74 | 43.85 | 90.59 | 122.20 | -31.61 | AVG | |
| 3 | 5850.0000 | 11.46 | 43.94 | 55.40 | 122.20 | -66.80 | Peak | |
| 4 | 5850.0000 | 2.41 | 43.94 | 46.35 | 122.20 | -75.85 | AVG | |
| 5 | 5860.0000 | 11.07 | 43.97 | 55.04 | 109.40 | -54.36 | Peak | |
| 6 | 5860.0000 | 1.92 | 43.97 | 45.89 | 109.40 | -63.51 | AVG | |

| | |
|---|---|
| Orthogonal Axis: | X |
| Test Mode: | UNII-3/TX N20 Mode 5825MHz |


**Vertical**

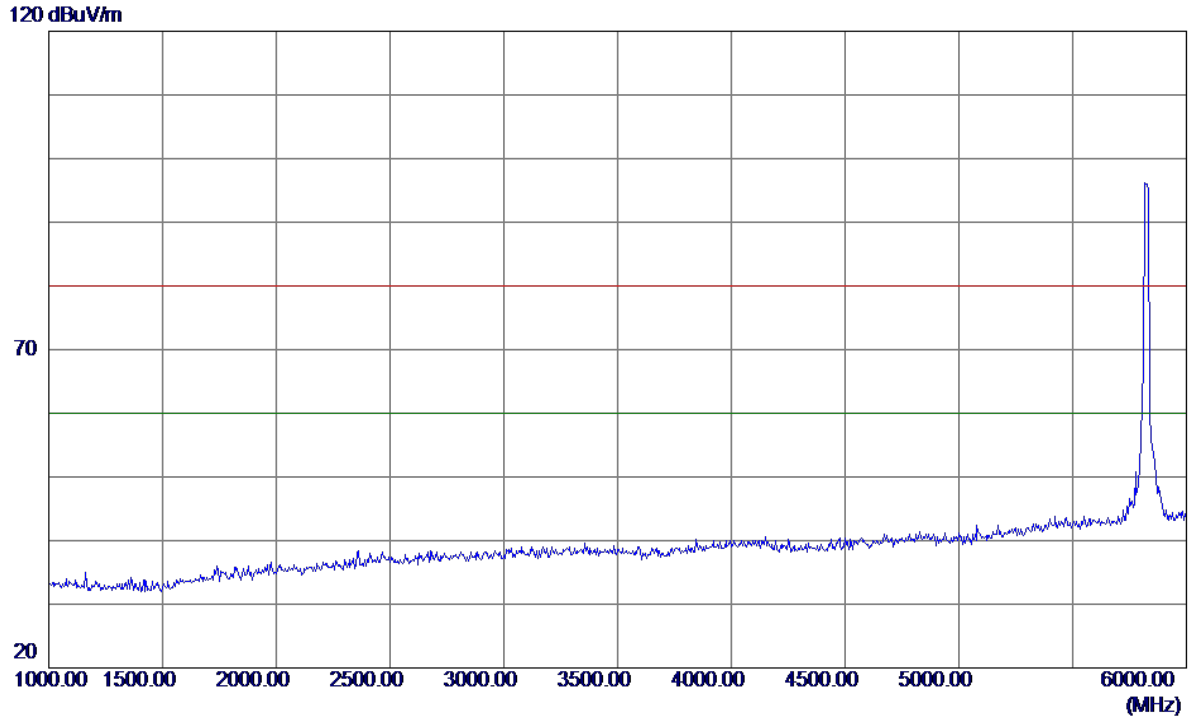


| No. | Freq. | Reading Level | Correct Factor | Measure ment | Limit | Margin | | |
|---|---|---|---|---|---|---|---|---|
| | MHz | dBuV/m | dB | dBuV/m | dBuV/m | dB | Detector | Comment |

| | |
|---|---|
| Orthogonal Axis: | X |
| Test Mode: | UNII-3/TX N20 Mode 5825MHz |


**Vertical**

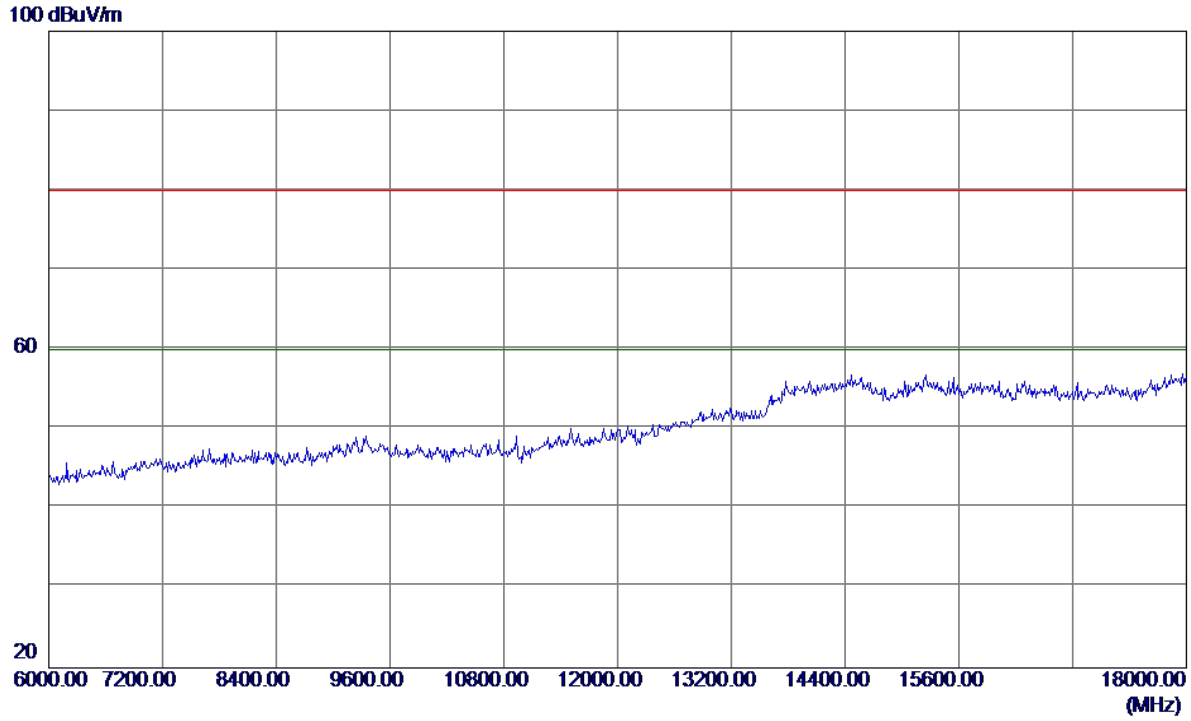


| No. | Freq. | Reading Level | Correct Factor | Measure ment | Limit | Margin | | |
|---|---|---|---|---|---|---|---|---|
| | MHz | dBuV/m | dB | dBuV/m | dBuV/m | dB | Detector | Comment |

| | |
|---|---|
| Orthogonal Axis: | X |
| Test Mode: | UNII-3/TX N20 Mode 5825MHz |


**Vertical**

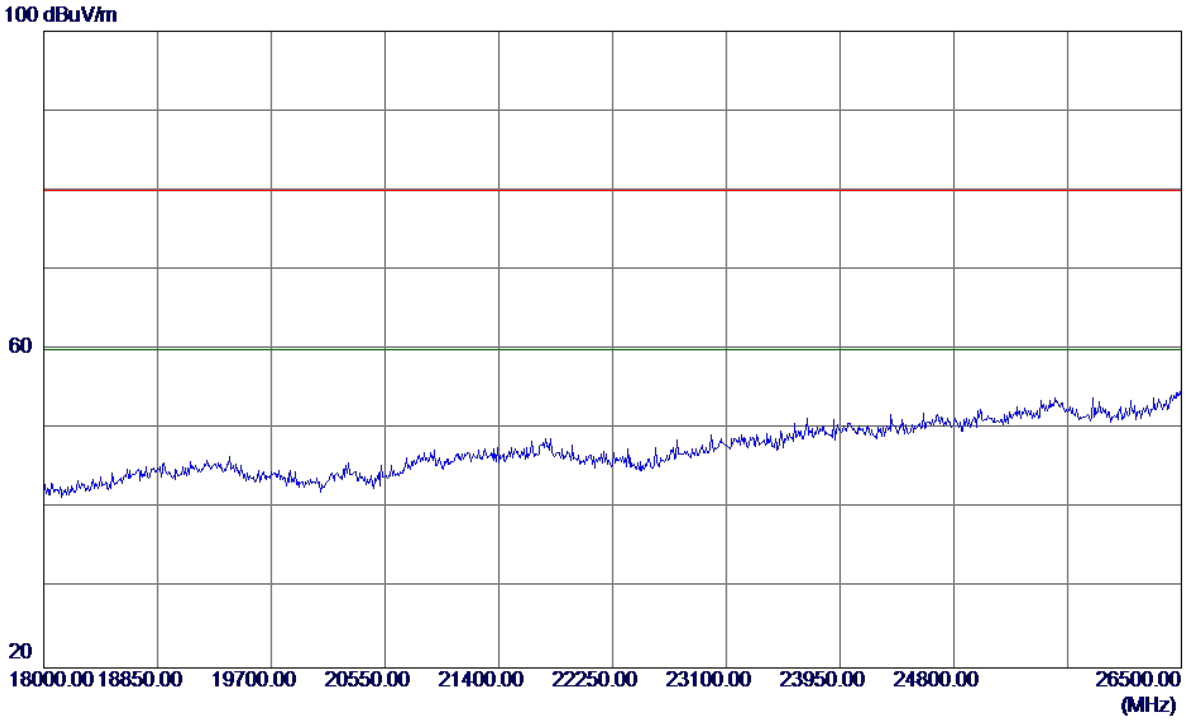


| No. | Freq. | Reading Level | Correct Factor | Measure ment | Limit | Margin | | |
|---|---|---|---|---|---|---|---|---|
| | MHz | dBuV/m | dB | dBuV/m | dBuV/m | dB | Detector | Comment |

| | |
|---|---|
| Orthogonal Axis: | X |
| Test Mode: | UNII-3/TX N20 Mode 5825MHz |


**Vertical**

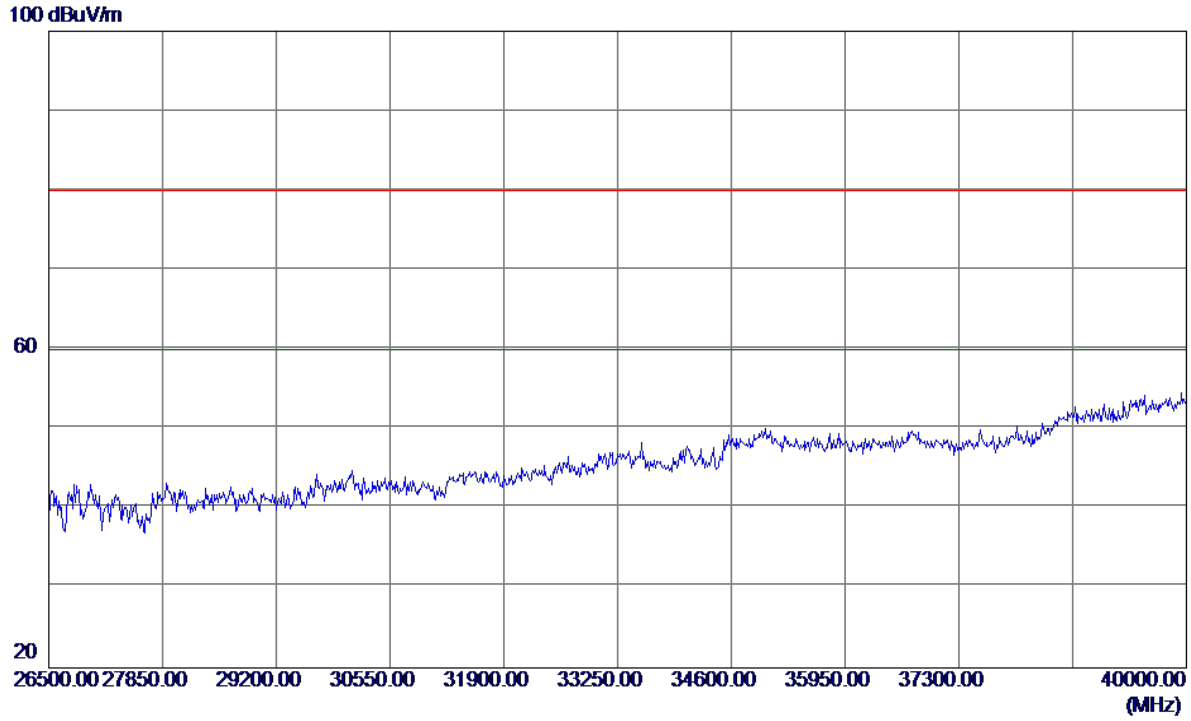


| No. | Freq. | Reading Level | Correct Factor | Measure ment | Limit | Margin | | |
|---|---|---|---|---|---|---|---|---|
| | MHz | dBuV/m | dB | dBuV/m | dBuV/m | dB | Detector | Comment |

| | |
|---|---|
| Orthogonal Axis: | X |
| Test Mode: | UNII-3/TX N20 Mode 5825MHz |


**Horizontal**

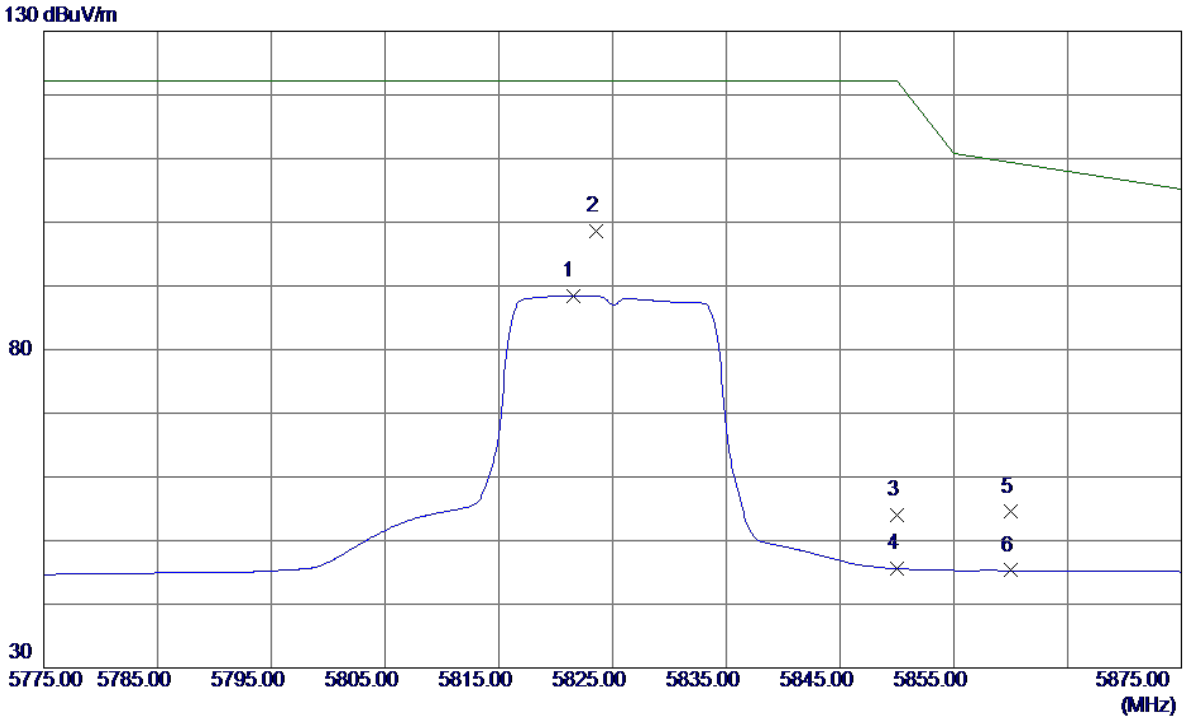


| No. | Freq. | Reading Level | Correct Factor | Measure ment | Limit | Margin | | |
|---|---|---|---|---|---|---|---|---|
| | MHz | dBuV/m | dB | dBuV/m | dBuV/m | dB | Detector | Comment |
| 1 | 5821.5000 | 44.63 | 43.85 | 88.48 | 122.20 | -33.72 | AVG | |
| 2 * | 5823.6000 | 54.68 | 43.86 | 98.54 | 122.20 | -23.66 | Peak | |
| 3 | 5850.0000 | 10.06 | 43.94 | 54.00 | 122.20 | -68.20 | Peak | |
| 4 | 5850.0000 | 1.64 | 43.94 | 45.58 | 122.20 | -76.62 | AVG | |
| 5 | 5860.0000 | 10.53 | 43.97 | 54.50 | 109.40 | -54.90 | Peak | |
| 6 | 5860.0000 | 1.33 | 43.97 | 45.30 | 109.40 | -64.10 | AVG | |

| | |
|---|---|
| Orthogonal Axis: | X |
| Test Mode: | UNII-3/TX N20 Mode 5825MHz |


**Horizontal**

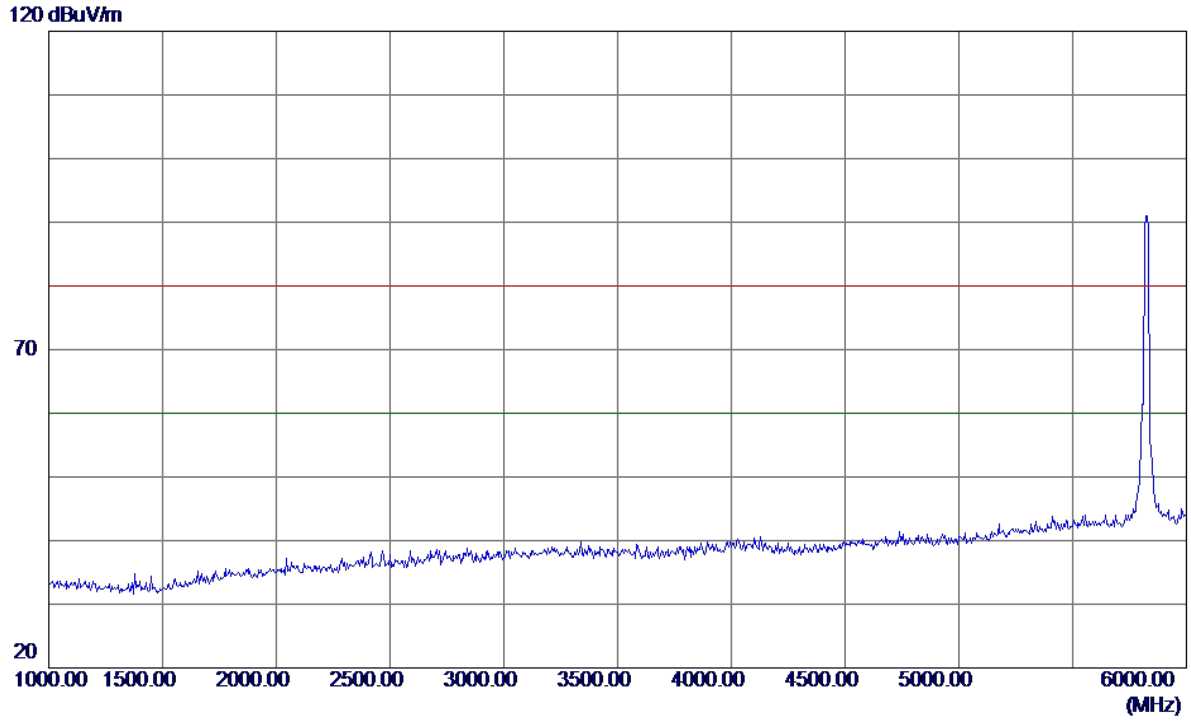


| No. | Freq. | Reading Level | Correct Factor | Measure ment | Limit | Margin | | |
|---|---|---|---|---|---|---|---|---|
| | MHz | dBuV/m | dB | dBuV/m | dBuV/m | dB | Detector | Comment |

| | |
|---|---|
| Orthogonal Axis: | X |
| Test Mode: | UNII-3/TX N20 Mode 5825MHz |


**Horizontal**

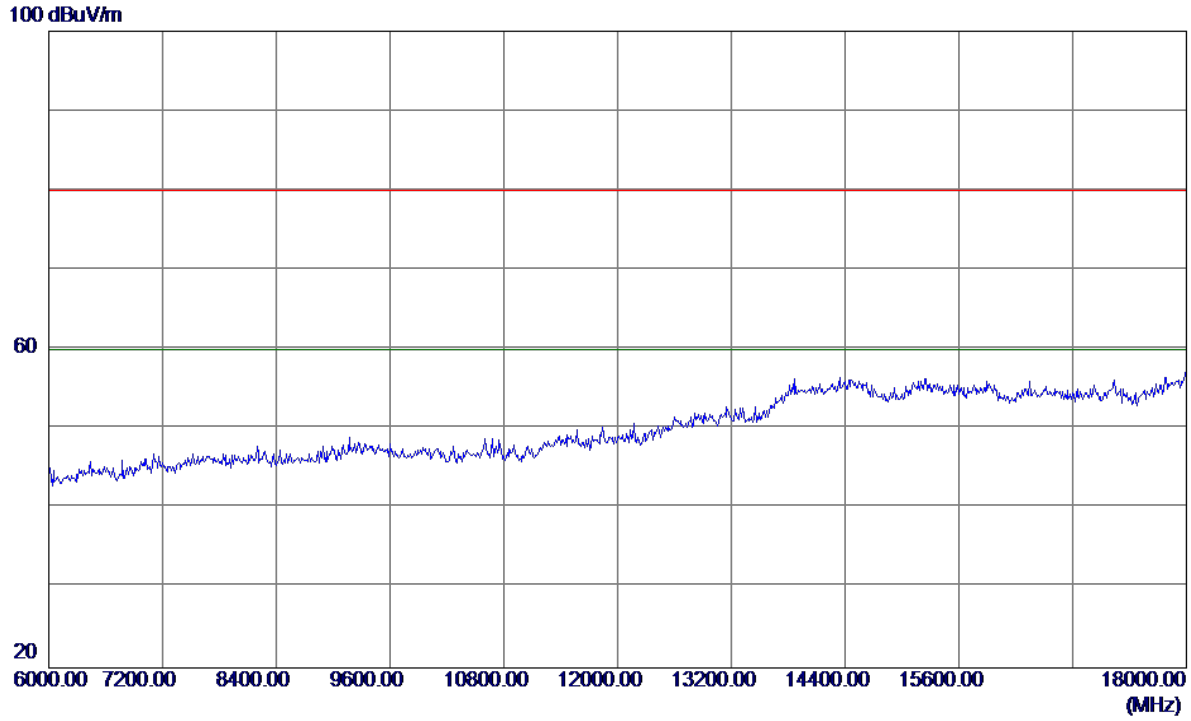


| No. | Freq. | Reading Level | Correct Factor | Measure ment | Limit | Margin | | |
|---|---|---|---|---|---|---|---|---|
| | MHz | dBuV/m | dB | dBuV/m | dBuV/m | dB | Detector | Comment |

| | |
|---|---|
| Orthogonal Axis: | X |
| Test Mode: | UNII-3/TX N20 Mode 5825MHz |


**Horizontal**

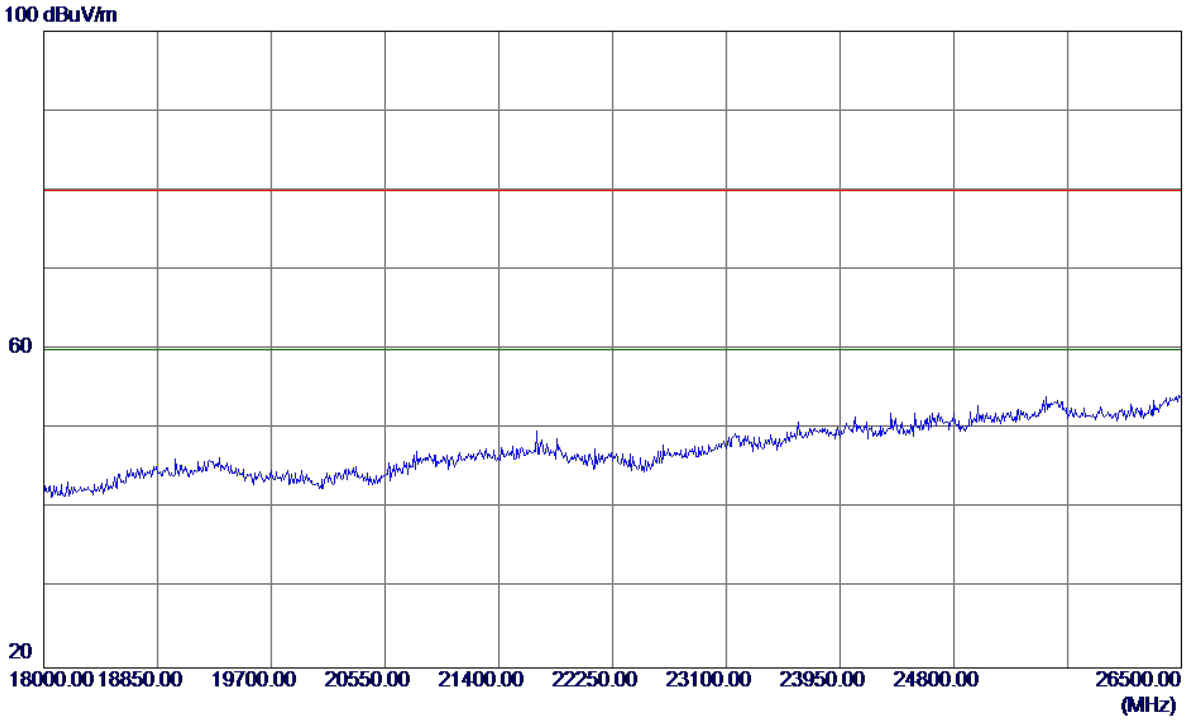


| No. | Freq. | Reading Level | Correct Factor | Measure ment | Limit | Margin | | |
|---|---|---|---|---|---|---|---|---|
| | MHz | dBuV/m | dB | dBuV/m | dBuV/m | dB | Detector | Comment |

| | |
|---|---|
| Orthogonal Axis: | X |
| Test Mode: | UNII-3/TX N20 Mode 5825MHz |


**Horizontal**

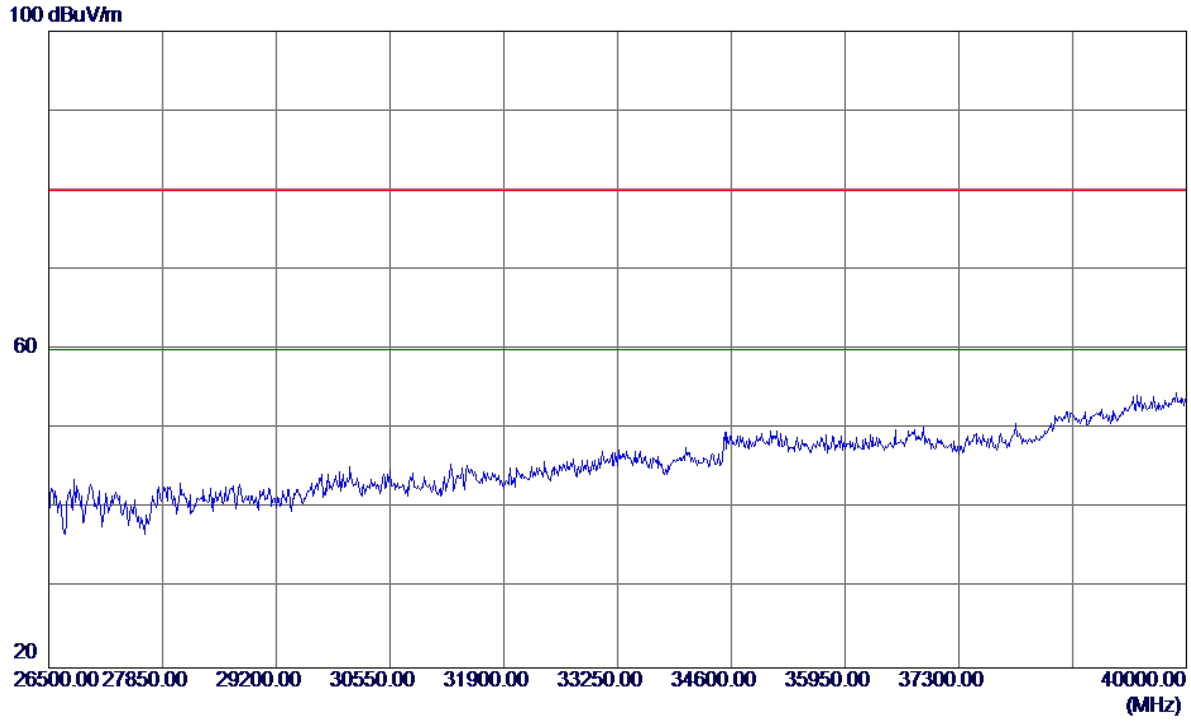


| No. | Freq. | Reading Level | Correct Factor | Measure ment | Limit | Margin | | |
|---|---|---|---|---|---|---|---|---|
| | MHz | dBuV/m | dB | dBuV/m | dBuV/m | dB | Detector | Comment |

| | |
|---|---|
| Orthogonal Axis: | X |
| Test Mode: | UNII-3/TX N40 Mode 5755MHz |


**Vertical**

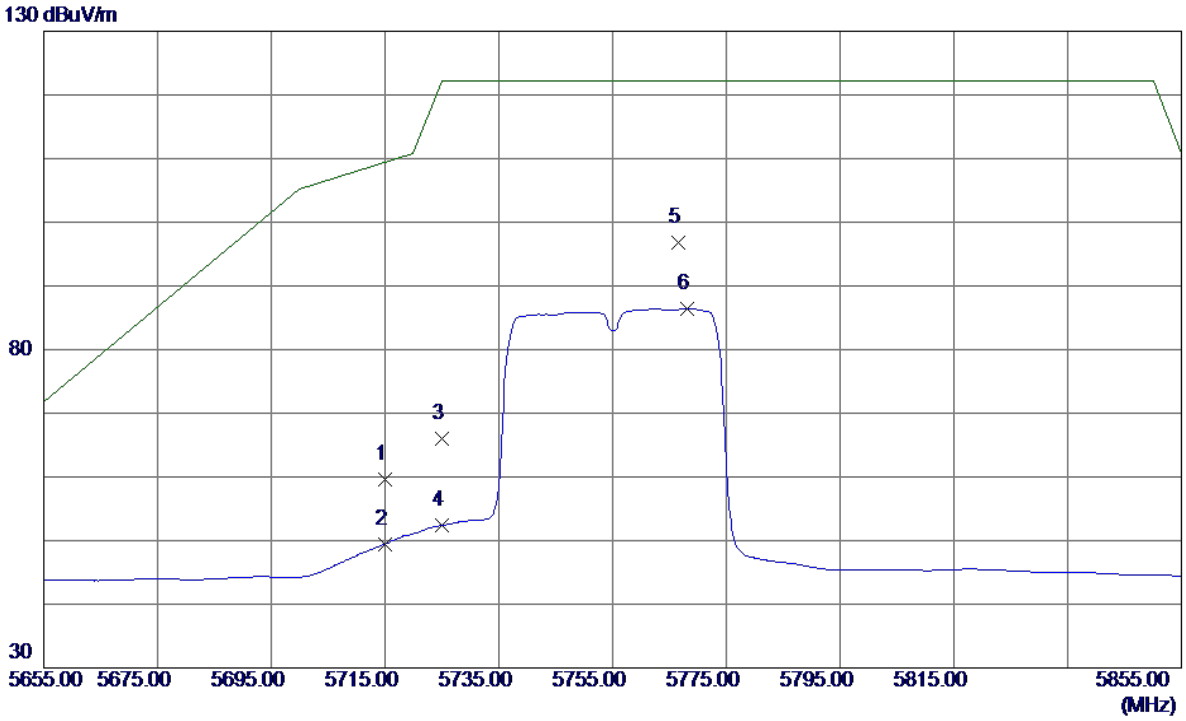


| No. | Freq. | Reading Level | Correct Factor | Measure ment | Limit | Margin | | |
|---|---|---|---|---|---|---|---|---|
| | MHz | dBuV/m | dB | dBuV/m | dBuV/m | dB | Detector | Comment |
| 1 | 5715.0000 | 16.01 | 43.53 | 59.54 | 109.40 | -49.86 | Peak | |
| 2 | 5715.0000 | 5.91 | 43.53 | 49.44 | 109.40 | -59.96 | AVG | |
| 3 | 5725.0000 | 22.35 | 43.56 | 65.91 | 122.20 | -56.29 | Peak | |
| 4 | 5725.0000 | 8.83 | 43.56 | 52.39 | 122.20 | -69.81 | AVG | |
| 5 * | 5766.6000 | 53.03 | 43.69 | 96.72 | 122.20 | -25.48 | Peak | |
| 6 | 5768.2000 | 42.70 | 43.69 | 86.39 | 122.20 | -35.81 | AVG | |

| | |
|---|---|
| Orthogonal Axis: | X |
| Test Mode: | UNII-3/TX N40 Mode 5755MHz |


**Vertical**

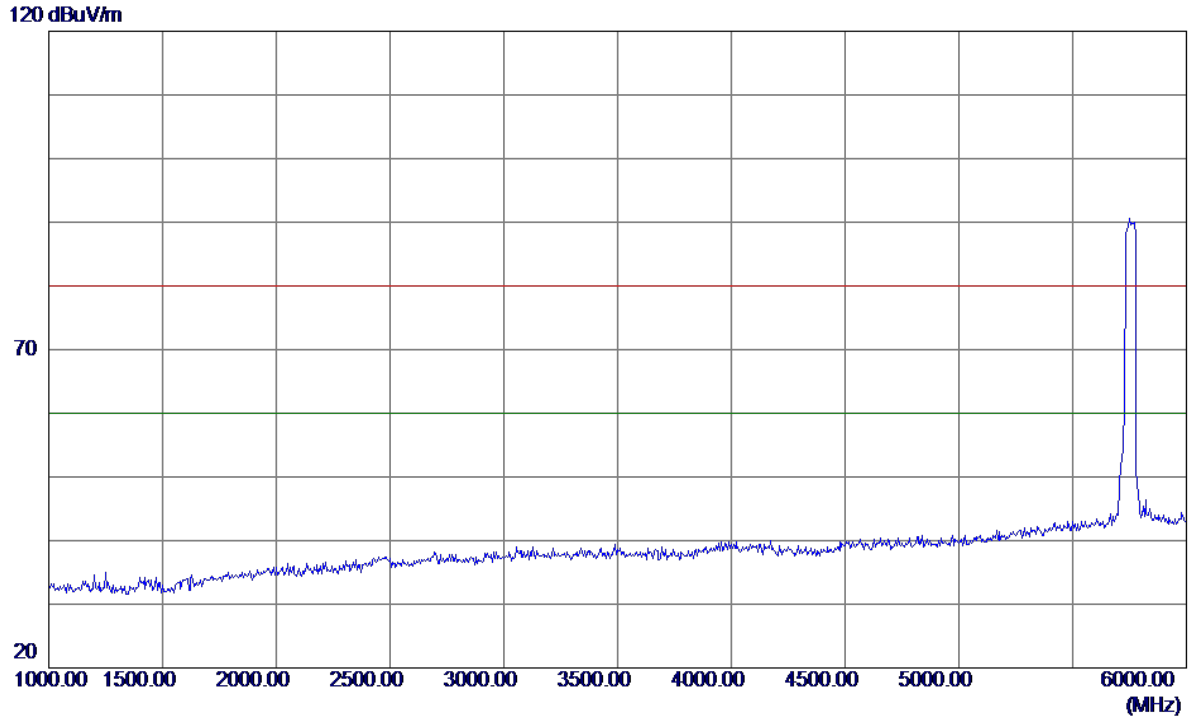


| No. | Freq. | Reading Level | Correct Factor | Measure ment | Limit | Margin | | |
|---|---|---|---|---|---|---|---|---|
| | MHz | dBuV/m | dB | dBuV/m | dBuV/m | dB | Detector | Comment |

| | |
|---|---|
| Orthogonal Axis: | X |
| Test Mode: | UNII-3/TX N40 Mode 5755MHz |


**Vertical**

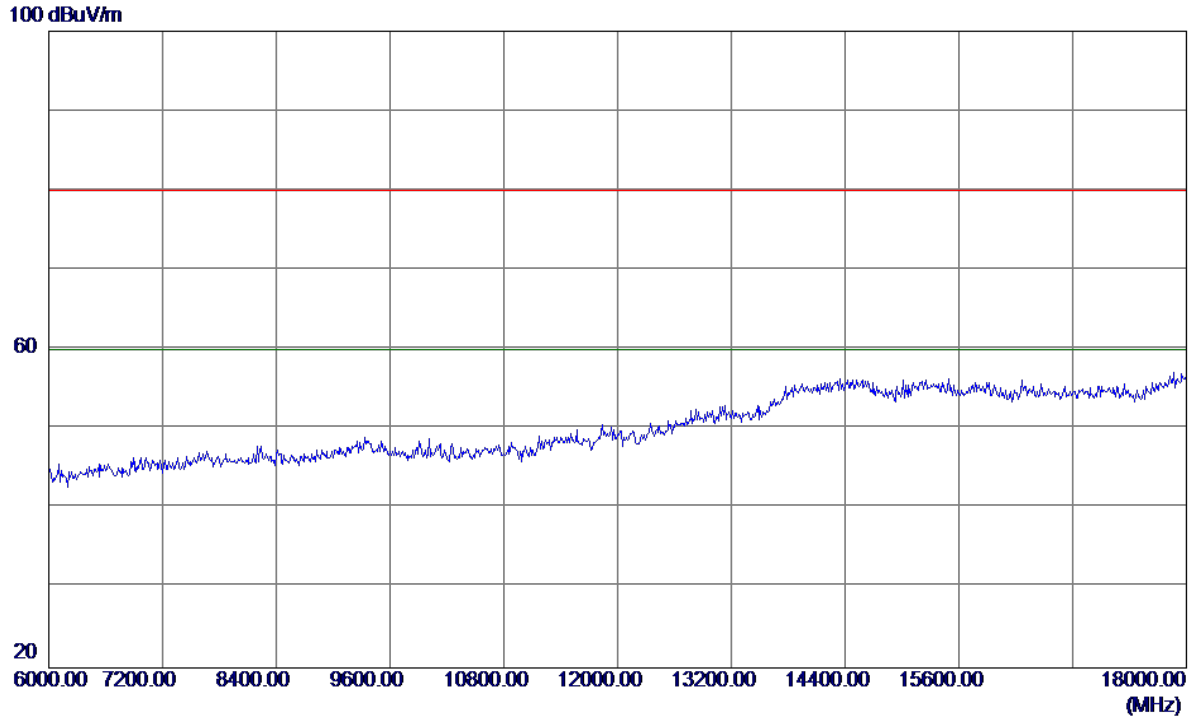


| No. | Freq. | Reading Level | Correct Factor | Measure ment | Limit | Margin | | |
|---|---|---|---|---|---|---|---|---|
| | MHz | dBuV/m | dB | dBuV/m | dBuV/m | dB | Detector | Comment |

| | |
|---|---|
| Orthogonal Axis: | X |
| Test Mode: | UNII-3/TX N40 Mode 5755MHz |


**Vertical**

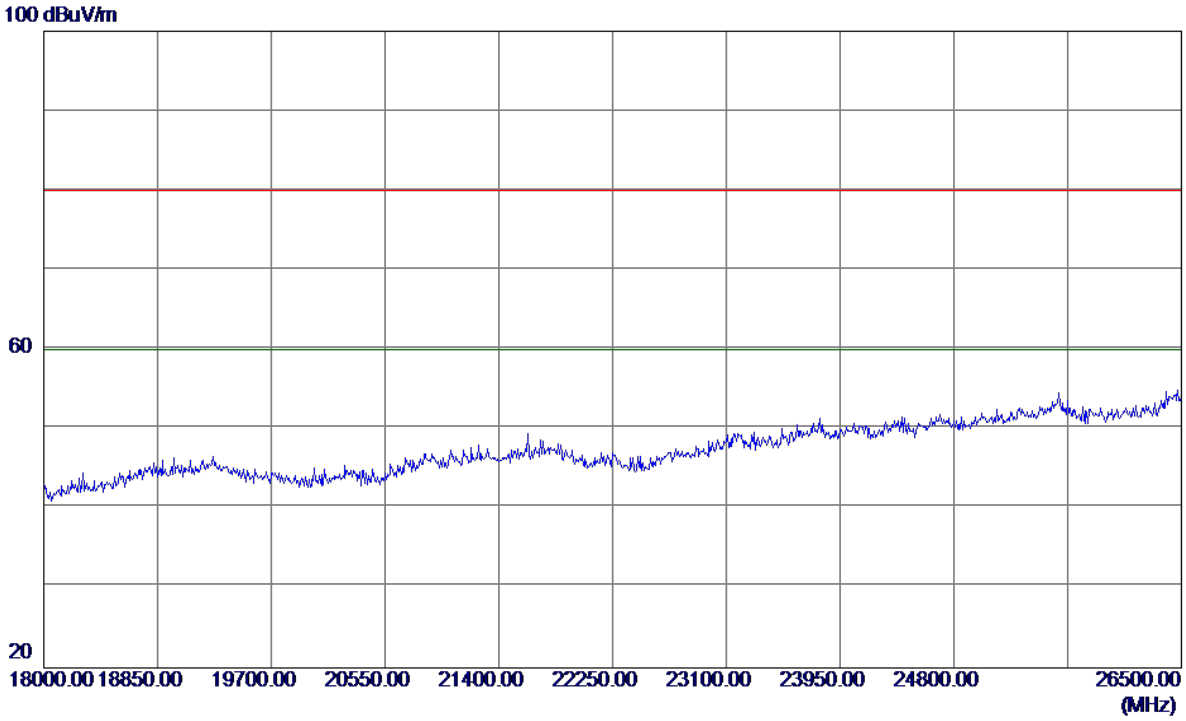


| No. | Freq. | Reading Level | Correct Factor | Measure ment | Limit | Margin | | |
|---|---|---|---|---|---|---|---|---|
| | MHz | dBuV/m | dB | dBuV/m | dBuV/m | dB | Detector | Comment |

| | |
|---|---|
| Orthogonal Axis: | X |
| Test Mode: | UNII-3/TX N40 Mode 5755MHz |


**Vertical**

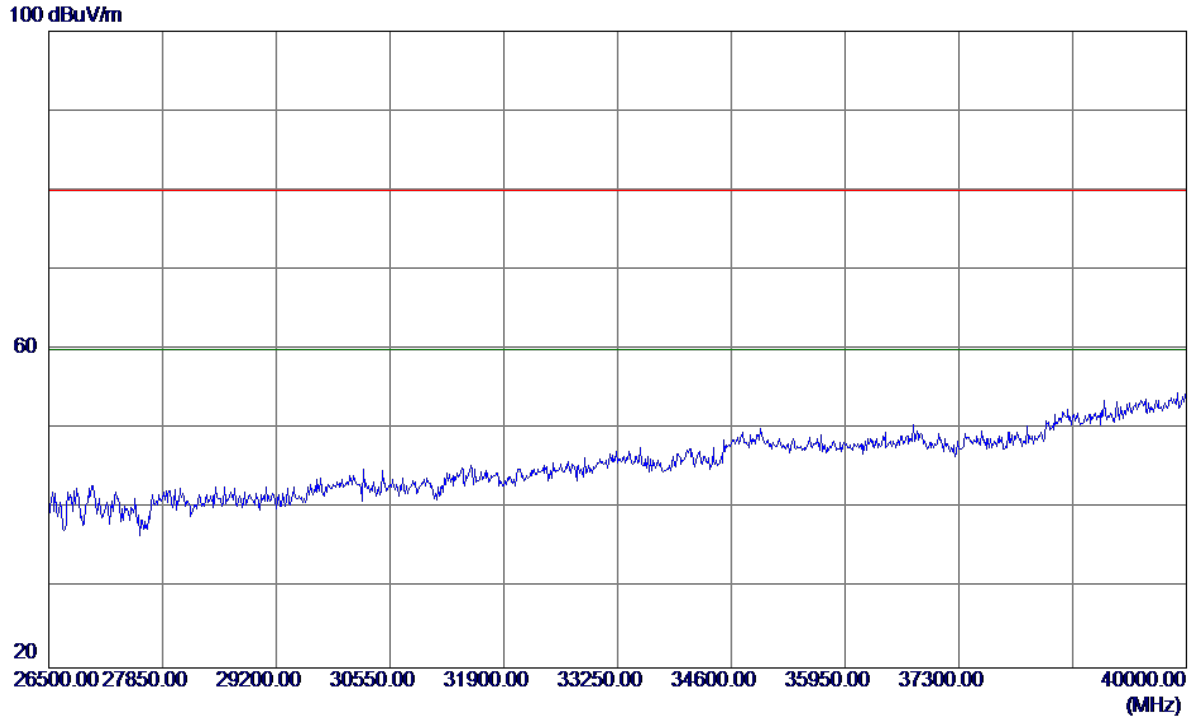


| No. | Freq. | Reading Level | Correct Factor | Measure ment | Limit | Margin | | |
|---|---|---|---|---|---|---|---|---|
| | MHz | dBuV/m | dB | dBuV/m | dBuV/m | dB | Detector | Comment |

| | |
|---|---|
| Orthogonal Axis: | X |
| Test Mode: | UNII-3/TX N40 Mode 5755MHz |


**Horizontal**

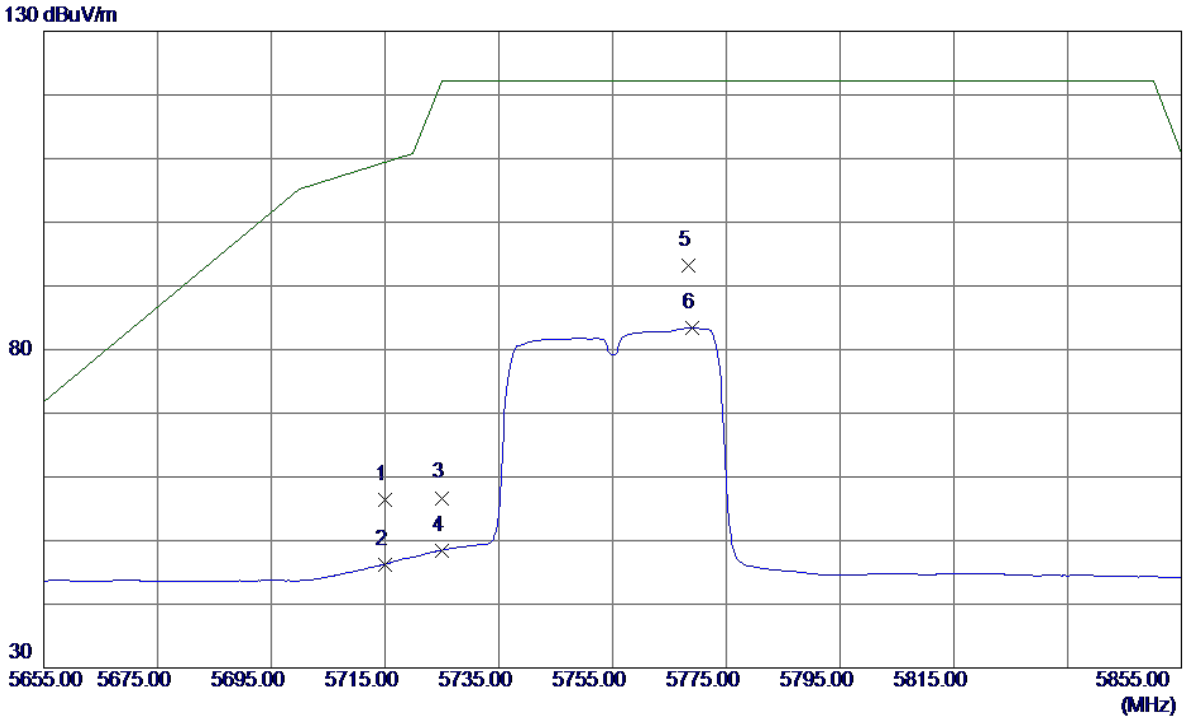


| No. | Freq. | Reading Level | Correct Factor | Measure ment | Limit | Margin | | |
|---|---|---|---|---|---|---|---|---|
| | MHz | dBuV/m | dB | dBuV/m | dBuV/m | dB | Detector | Comment |
| 1 | 5715.0000 | 12.92 | 43.53 | 56.45 | 109.40 | -52.95 | Peak | |
| 2 | 5715.0000 | 2.76 | 43.53 | 46.29 | 109.40 | -63.11 | AVG | |
| 3 | 5725.0000 | 13.14 | 43.56 | 56.70 | 122.20 | -65.50 | Peak | |
| 4 | 5725.0000 | 4.92 | 43.56 | 48.48 | 122.20 | -73.72 | AVG | |
| 5 * | 5768.4000 | 49.45 | 43.69 | 93.14 | 122.20 | -29.06 | Peak | |
| 6 | 5769.0000 | 39.72 | 43.69 | 83.41 | 122.20 | -38.79 | AVG | |

| | |
|---|---|
| Orthogonal Axis: | X |
| Test Mode: | UNII-3/TX N40 Mode 5755MHz |


**Horizontal**

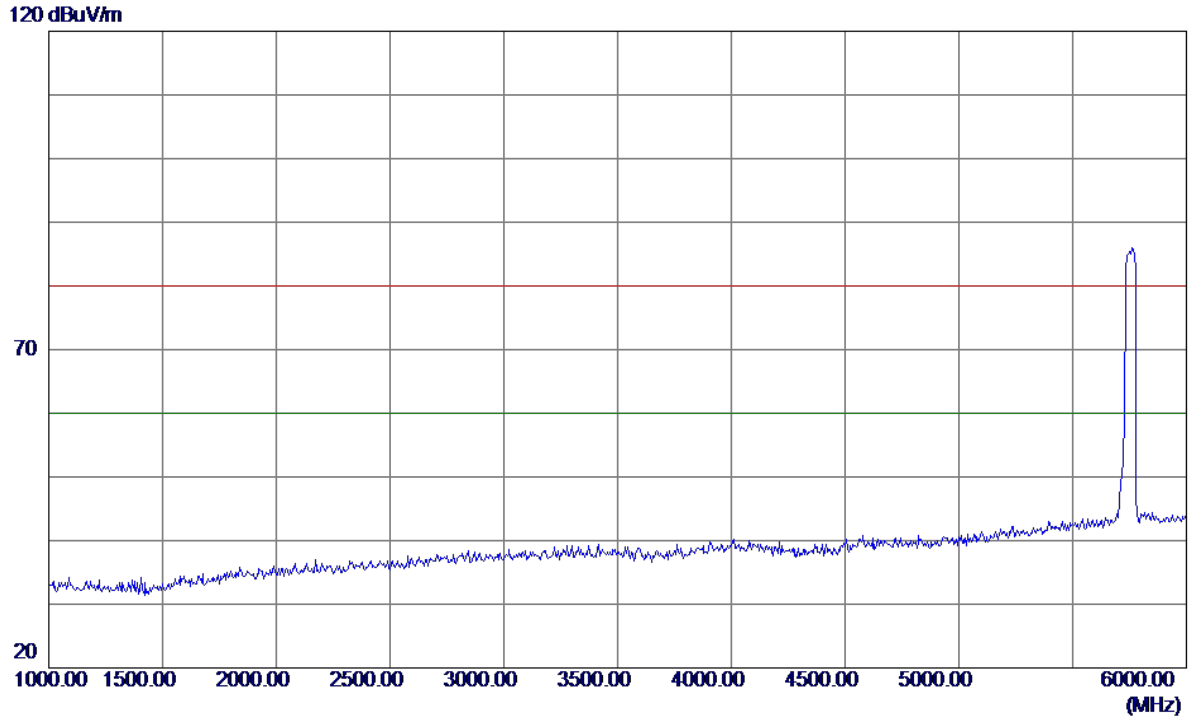


| No. | Freq. | Reading Level | Correct Factor | Measure ment | Limit | Margin | | |
|---|---|---|---|---|---|---|---|---|
| | MHz | dBuV/m | dB | dBuV/m | dBuV/m | dB | Detector | Comment |

| | |
|---|---|
| Orthogonal Axis: | X |
| Test Mode: | UNII-3/TX N40 Mode 5755MHz |


**Horizontal**

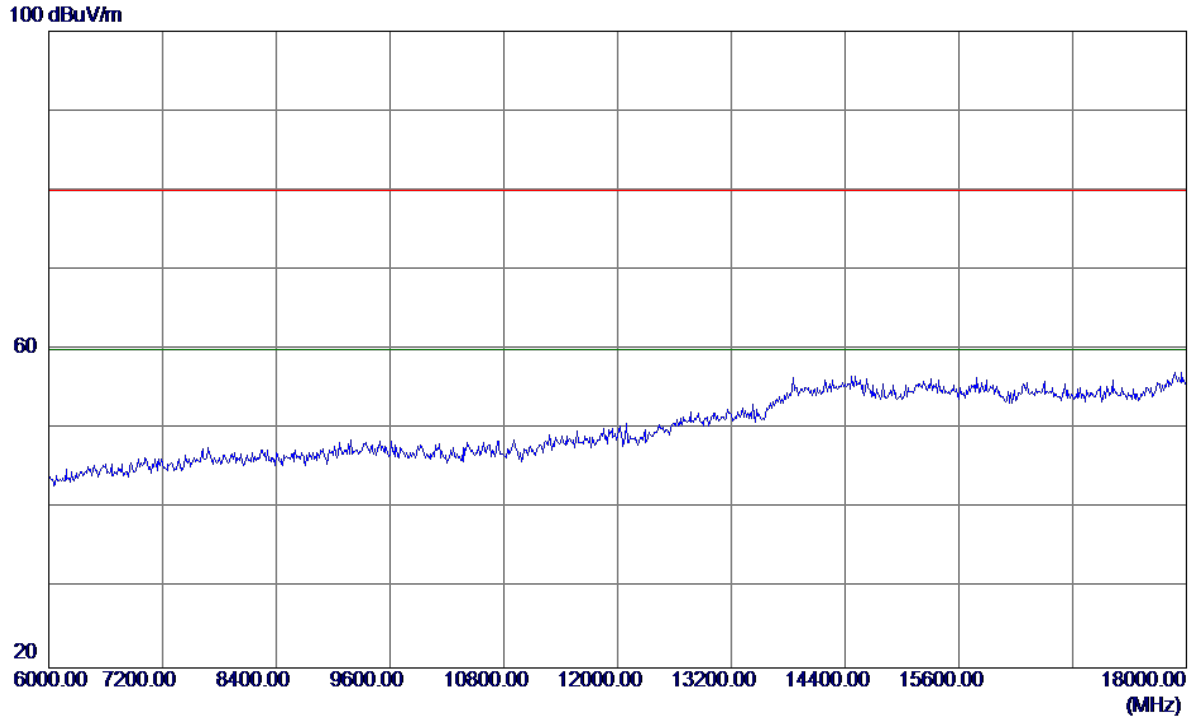


| No. | Freq. | Reading Level | Correct Factor | Measure ment | Limit | Margin | | |
|---|---|---|---|---|---|---|---|---|
| | MHz | dBuV/m | dB | dBuV/m | dBuV/m | dB | Detector | Comment |

| | |
|---|---|
| Orthogonal Axis: | X |
| Test Mode: | UNII-3/TX N40 Mode 5755MHz |


**Horizontal**

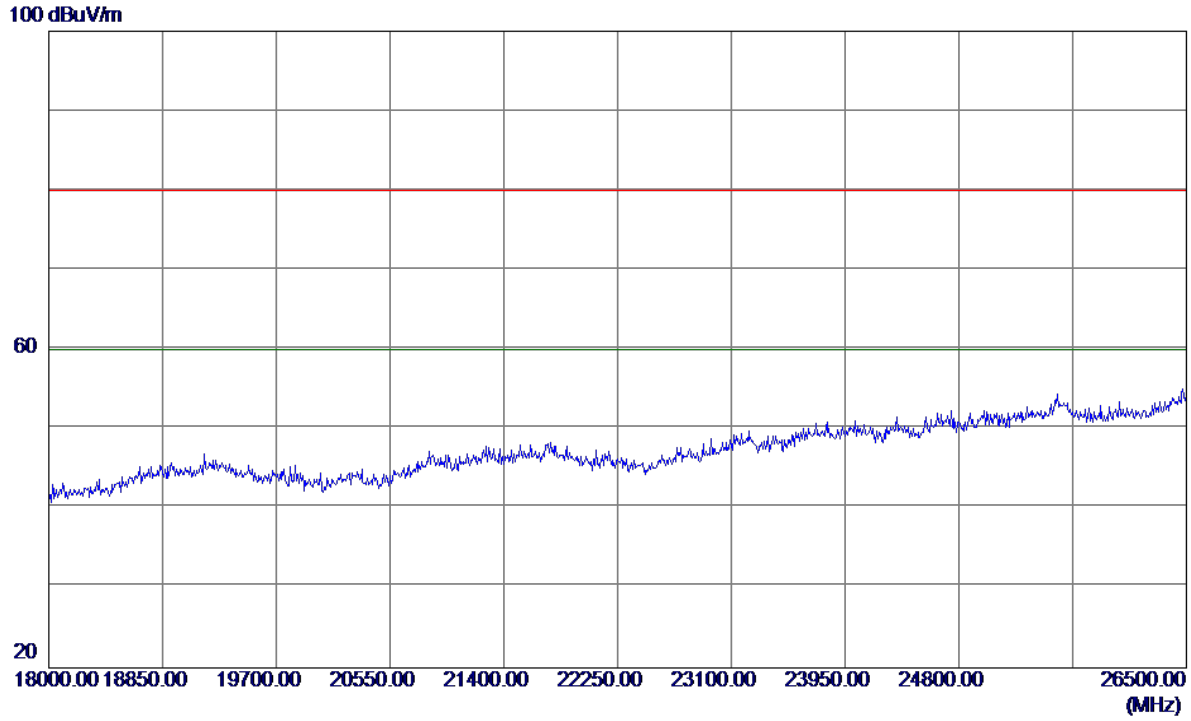


| No. | Freq. | Reading Level | Correct Factor | Measure ment | Limit | Margin | | |
|---|---|---|---|---|---|---|---|---|
| | MHz | dBuV/m | dB | dBuV/m | dBuV/m | dB | Detector | Comment |

| | |
|---|---|
| Orthogonal Axis: | X |
| Test Mode: | UNII-3/TX N40 Mode 5755MHz |


**Horizontal**

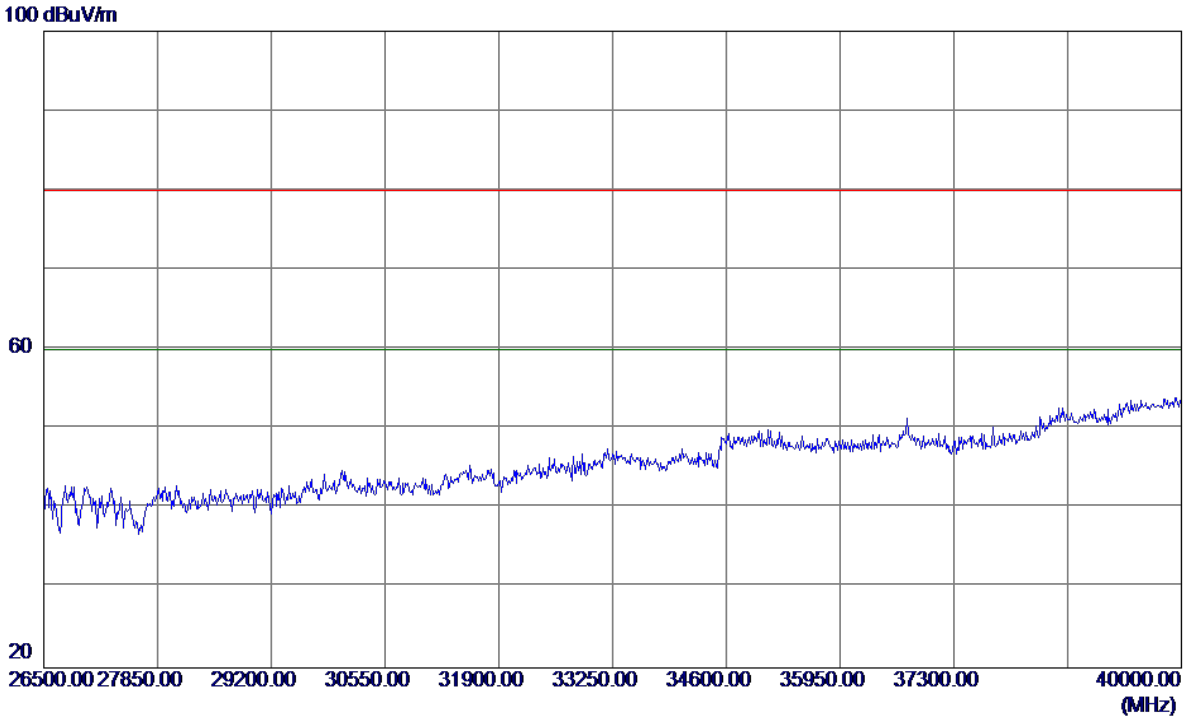


| No. | Freq. | Reading Level | Correct Factor | Measure ment | Limit | Margin | | |
|---|---|---|---|---|---|---|---|---|
| | MHz | dBuV/m | dB | dBuV/m | dBuV/m | dB | Detector | Comment |

| | |
|---|---|
| Orthogonal Axis: | X |
| Test Mode: | UNII-3/TX N40 Mode 5795MHz |


**Vertical**

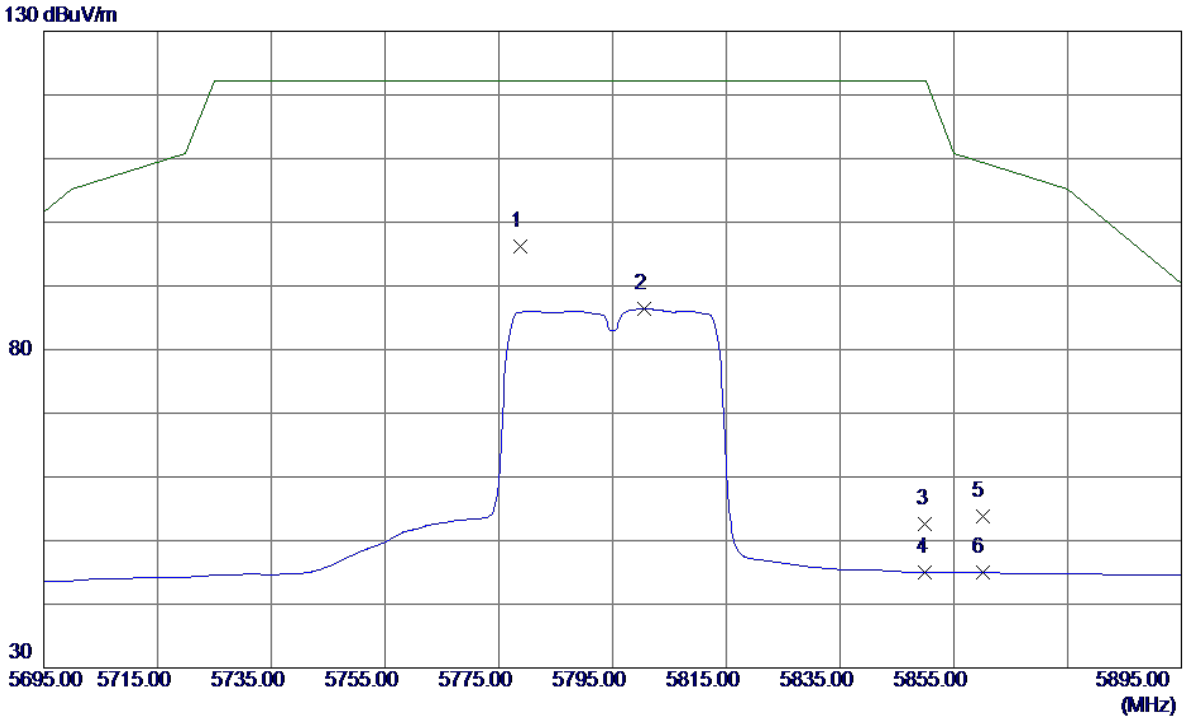


| No. | Freq. | Reading Level | Correct Factor | Measure ment | Limit | Margin | | |
|---|---|---|---|---|---|---|---|---|
| | MHz | dBuV/m | dB | dBuV/m | dBuV/m | dB | Detector | Comment |
| 1 * | 5778.8000 | 52.41 | 43.72 | 96.13 | 122.20 | -26.07 | Peak | |
| 2 | 5800.6000 | 42.57 | 43.79 | 86.36 | 122.20 | -35.84 | AVG | |
| 3 | 5850.0000 | 8.66 | 43.94 | 52.60 | 122.20 | -69.60 | Peak | |
| 4 | 5850.0000 | 1.13 | 43.94 | 45.07 | 122.20 | -77.13 | AVG | |
| 5 | 5860.0000 | 9.75 | 43.97 | 53.72 | 109.40 | -55.68 | Peak | |
| 6 | 5860.0000 | 1.03 | 43.97 | 45.00 | 109.40 | -64.40 | AVG | |

| | |
|---|---|
| Orthogonal Axis: | X |
| Test Mode: | UNII-3/TX N40 Mode 5795MHz |


**Vertical**

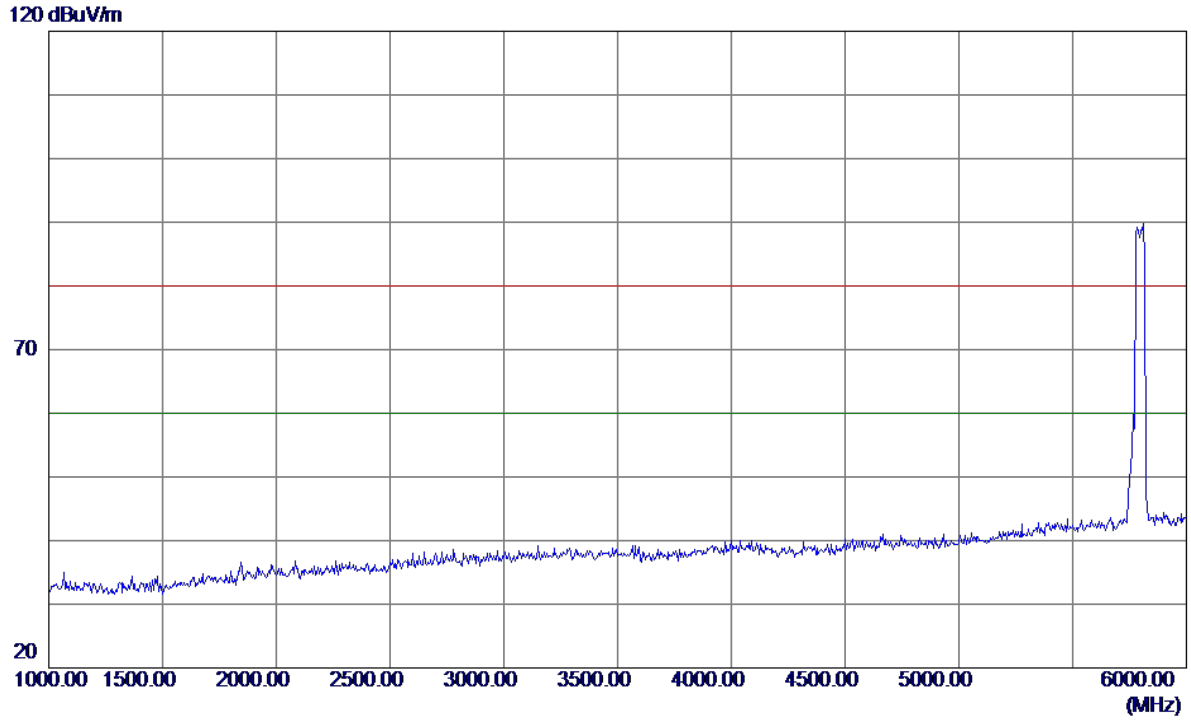


| No. | Freq. | Reading Level | Correct Factor | Measure ment | Limit | Margin | | |
|---|---|---|---|---|---|---|---|---|
| | MHz | dBuV/m | dB | dBuV/m | dBuV/m | dB | Detector | Comment |

| | |
|---|---|
| Orthogonal Axis: | X |
| Test Mode: | UNII-3/TX N40 Mode 5795MHz |


**Vertical**

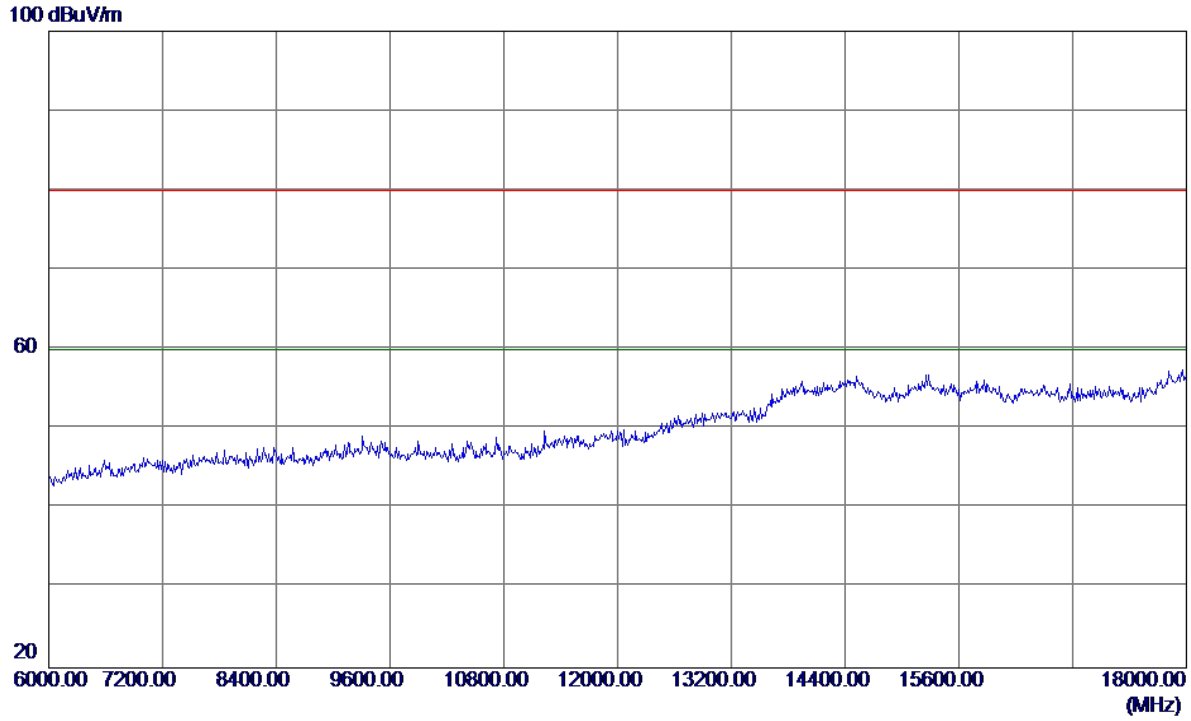


| No. | Freq. | Reading Level | Correct Factor | Measure ment | Limit | Margin | | |
|---|---|---|---|---|---|---|---|---|
| | MHz | dBuV/m | dB | dBuV/m | dBuV/m | dB | Detector | Comment |

| | |
|---|---|
| Orthogonal Axis: | X |
| Test Mode: | UNII-3/TX N40 Mode 5795MHz |


**Vertical**

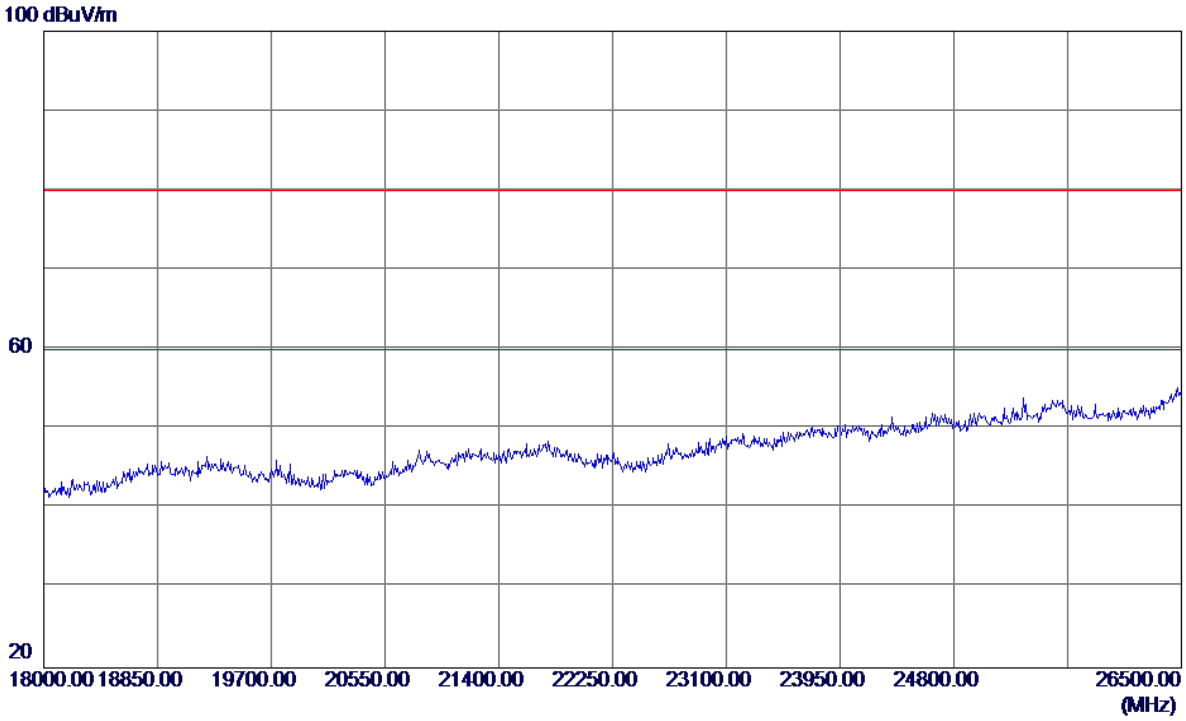


| No. | Freq. | Reading Level | Correct Factor | Measure ment | Limit | Margin | | |
|---|---|---|---|---|---|---|---|---|
| | MHz | dBuV/m | dB | dBuV/m | dBuV/m | dB | Detector | Comment |

| | |
|---|---|
| Orthogonal Axis: | X |
| Test Mode: | UNII-3/TX N40 Mode 5795MHz |


**Vertical**

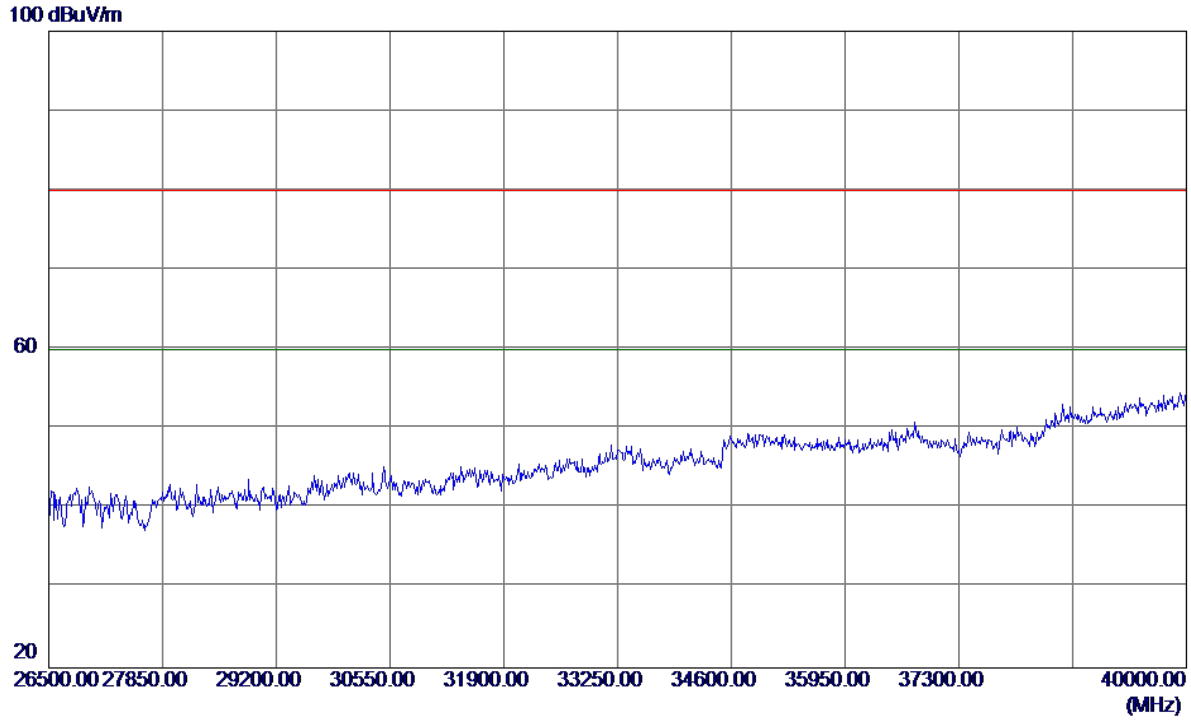


| No. | Freq. | Reading Level | Correct Factor | Measure ment | Limit | Margin | | |
|---|---|---|---|---|---|---|---|---|
| | MHz | dBuV/m | dB | dBuV/m | dBuV/m | dB | Detector | Comment |

| | |
|---|---|
| Orthogonal Axis: | X |
| Test Mode: | UNII-3/TX N40 Mode 5795MHz |


**Horizontal**

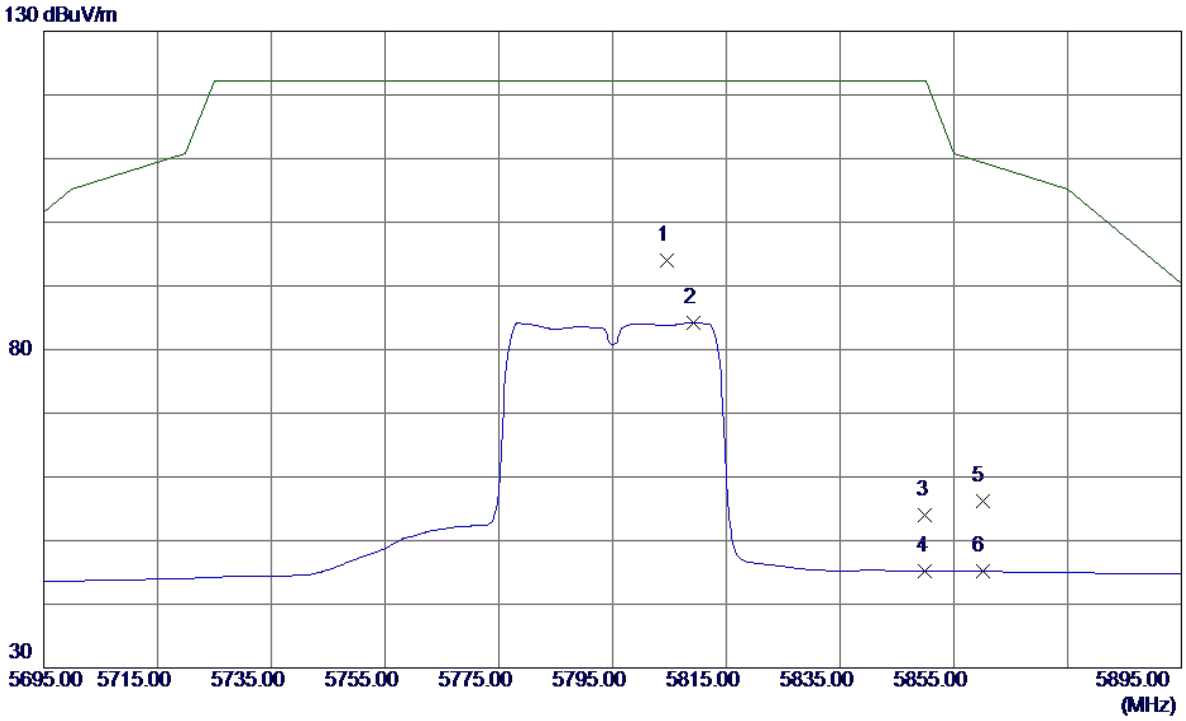


| No. | Freq. | Reading Level | Correct Factor | Measure ment | Limit | Margin | | |
|---|---|---|---|---|---|---|---|---|
| | MHz | dBuV/m | dB | dBuV/m | dBuV/m | dB | Detector | Comment |
| 1 * | 5804.6000 | 50.22 | 43.80 | 94.02 | 122.20 | -28.18 | Peak | |
| 2 | 5809.2000 | 40.40 | 43.81 | 84.21 | 122.20 | -37.99 | AVG | |
| 3 | 5850.0000 | 10.15 | 43.94 | 54.09 | 122.20 | -68.11 | Peak | |
| 4 | 5850.0000 | 1.29 | 43.94 | 45.23 | 122.20 | -76.97 | AVG | |
| 5 | 5860.0000 | 12.26 | 43.97 | 56.23 | 109.40 | -53.17 | Peak | |
| 6 | 5860.0000 | 1.22 | 43.97 | 45.19 | 109.40 | -64.21 | AVG | |

| | |
|---|---|
| Orthogonal Axis: | X |
| Test Mode: | UNII-3/TX N40 Mode 5795MHz |


**Horizontal**

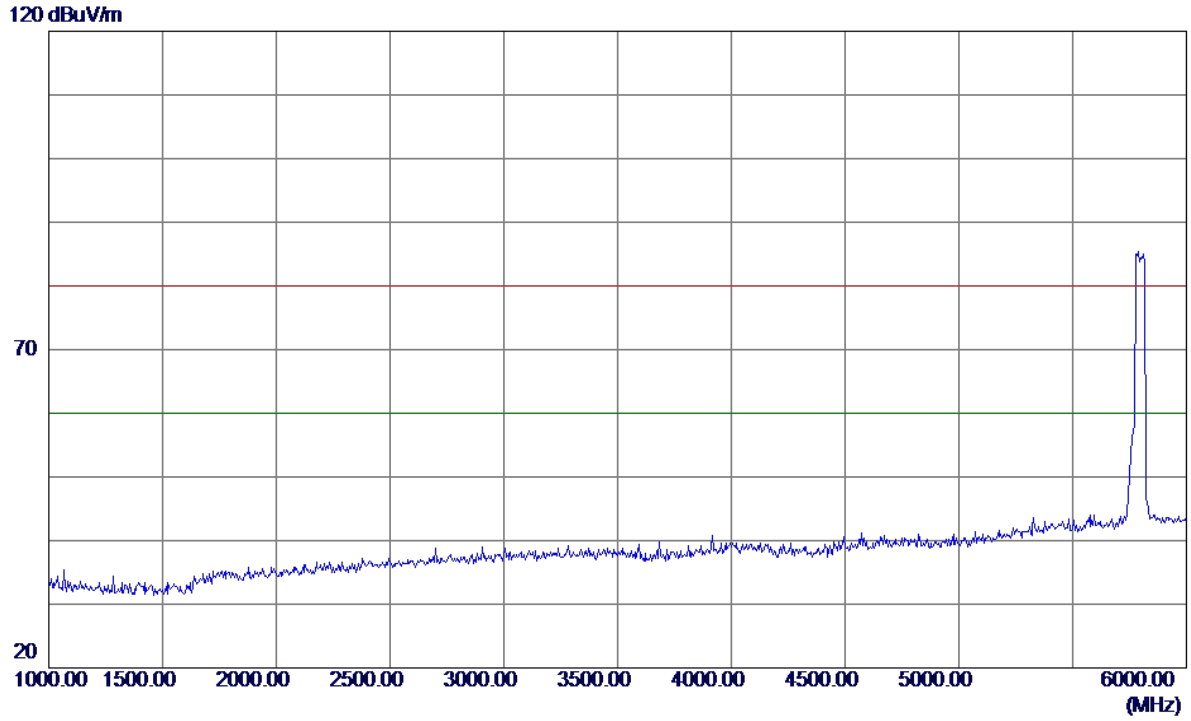


| No. | Freq. | Reading Level | Correct Factor | Measure ment | Limit | Margin | | |
|---|---|---|---|---|---|---|---|---|
| | MHz | dBuV/m | dB | dBuV/m | dBuV/m | dB | Detector | Comment |

| | |
|---|---|
| Orthogonal Axis: | X |
| Test Mode: | UNII-3/TX N40 Mode 5795MHz |


**Horizontal**

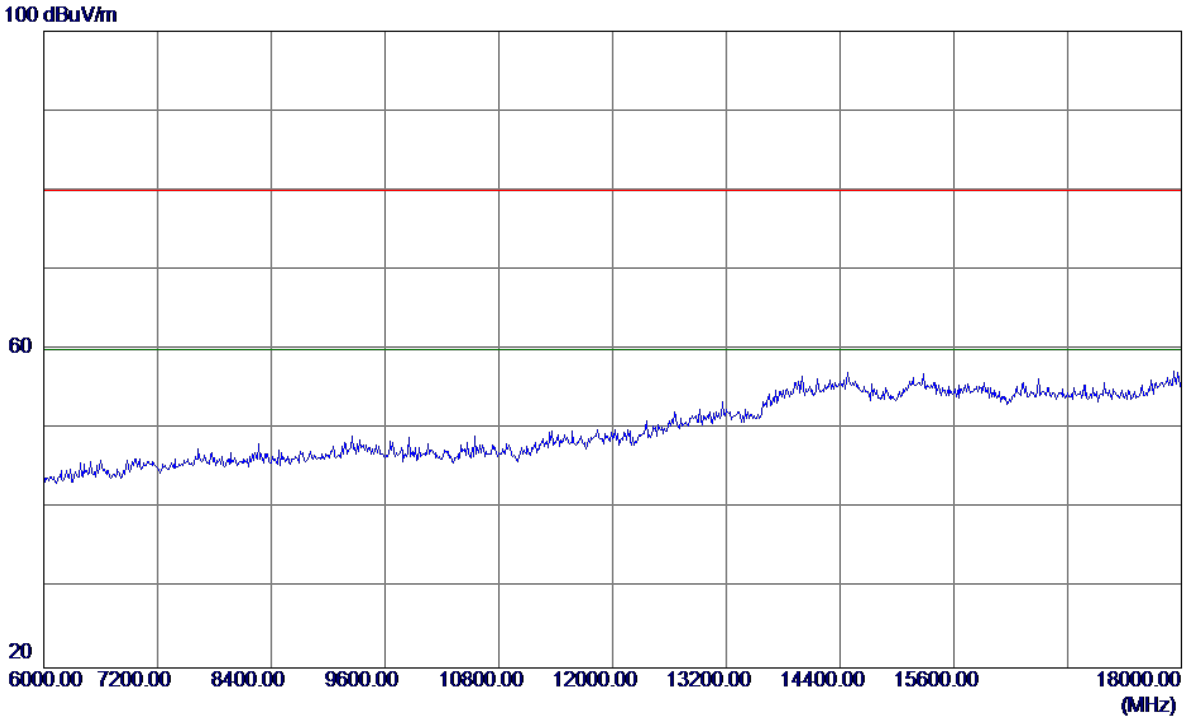


| No. | Freq. | Reading Level | Correct Factor | Measure ment | Limit | Margin | | |
|---|---|---|---|---|---|---|---|---|
| | MHz | dBuV/m | dB | dBuV/m | dBuV/m | dB | Detector | Comment |

| | |
|---|---|
| Orthogonal Axis: | X |
| Test Mode: | UNII-3/TX N40 Mode 5795MHz |


**Horizontal**

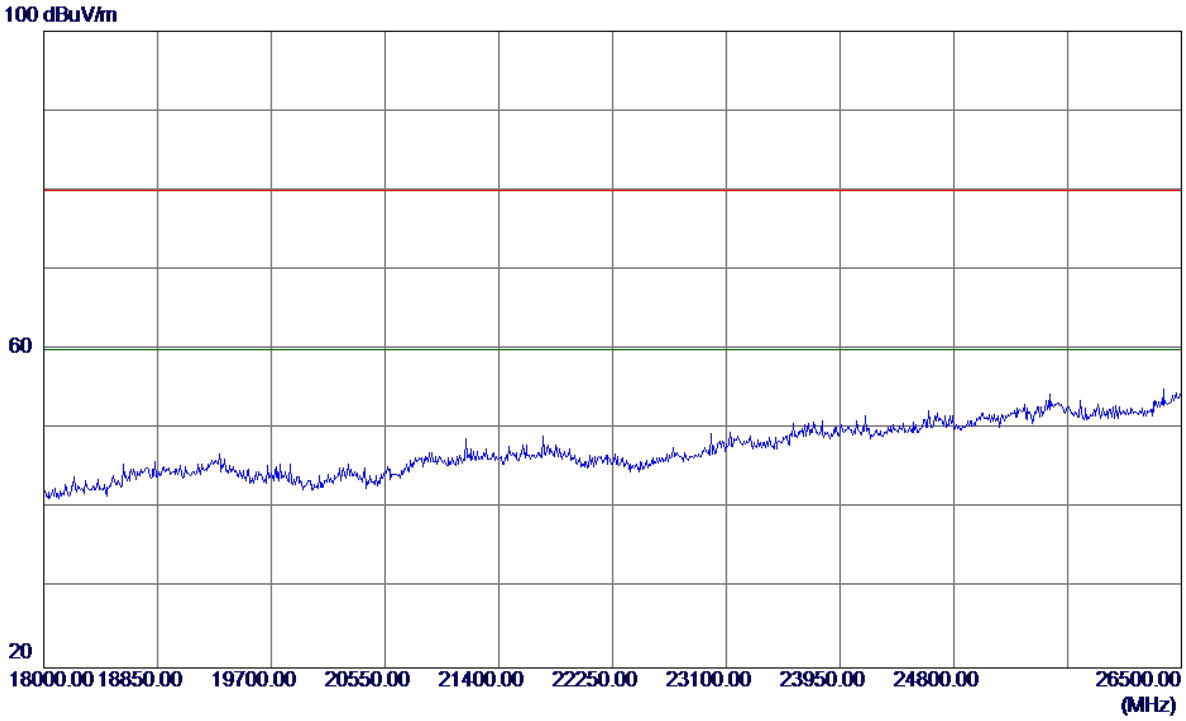


| No. | Freq. | Reading Level | Correct Factor | Measure ment | Limit | Margin | | |
|---|---|---|---|---|---|---|---|---|
| | MHz | dBuV/m | dB | dBuV/m | dBuV/m | dB | Detector | Comment |

| | |
|---|---|
| Orthogonal Axis: | X |
| Test Mode: | UNII-3/TX N40 Mode 5795MHz |


**Horizontal**

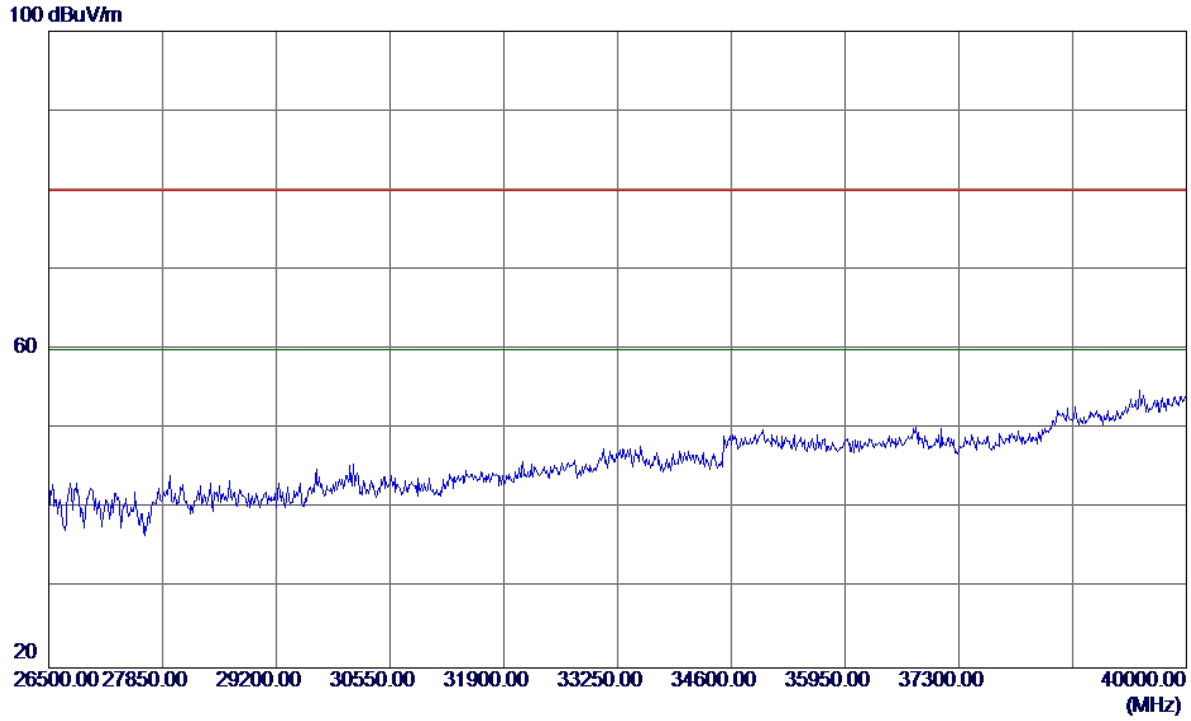


| No. | Freq. | Reading Level | Correct Factor | Measure ment | Limit | Margin | | |
|---|---|---|---|---|---|---|---|---|
| | MHz | dBuV/m | dB | dBuV/m | dBuV/m | dB | Detector | Comment |

| | |
|---|---|
| Orthogonal Axis: | X |
| Test Mode: | UNII-1/ TX AC20 Mode 5180MHz |


**Vertical**

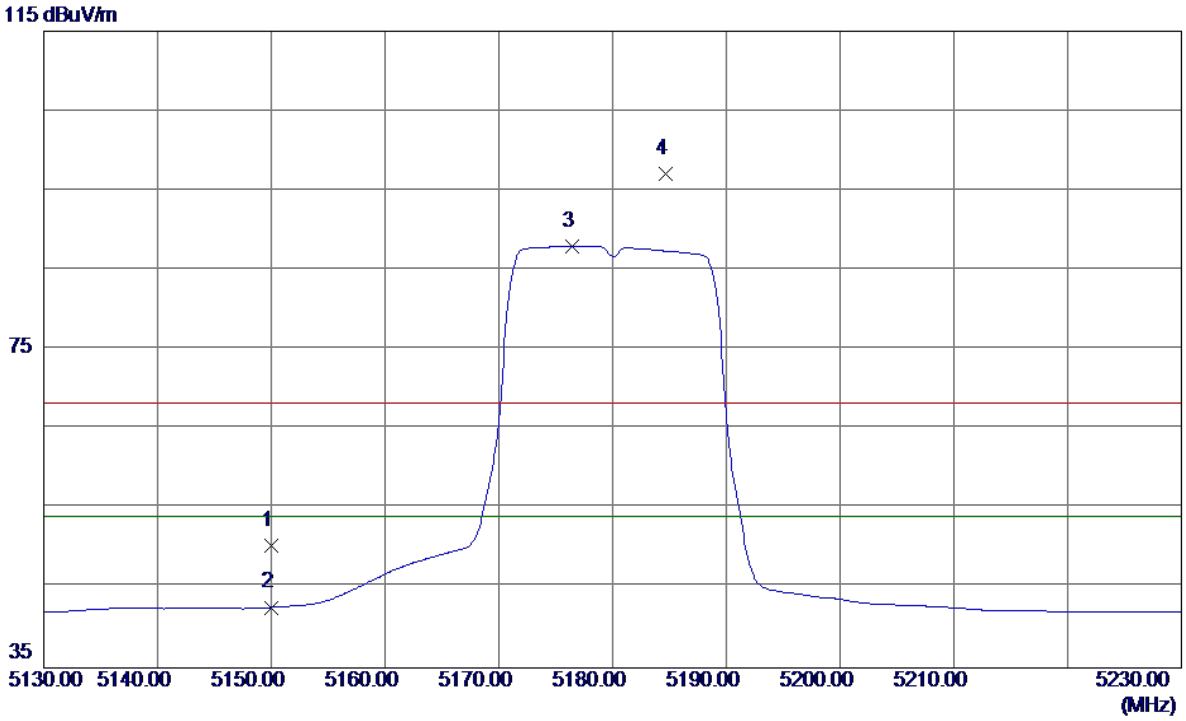


| No. | Freq. | Reading Level | Correct Factor | Measure ment | Limit | Margin | | |
|---|---|---|---|---|---|---|---|---|
| | MHz | dBuV/m | dB | dBuV/m | dBuV/m | dB | Detector | Comment |
| 1 | 5150.0000 | 9.24 | 41.10 | 50.34 | 68.30 | -17.96 | Peak | |
| 2 | 5150.0000 | 1.50 | 41.10 | 42.60 | 54.00 | -11.40 | AVG | |
| 3 * | 5176.4000 | 46.77 | 41.24 | 88.01 | 54.00 | 34.01 | AVG | No Limit |
| 4 | 5184.7000 | 55.73 | 41.28 | 97.01 | 68.30 | 28.71 | Peak | No Limit |

| | |
|---|---|
| Orthogonal Axis: | X |
| Test Mode: | UNII-1/ TX AC20 Mode 5180MHz |


**Vertical**

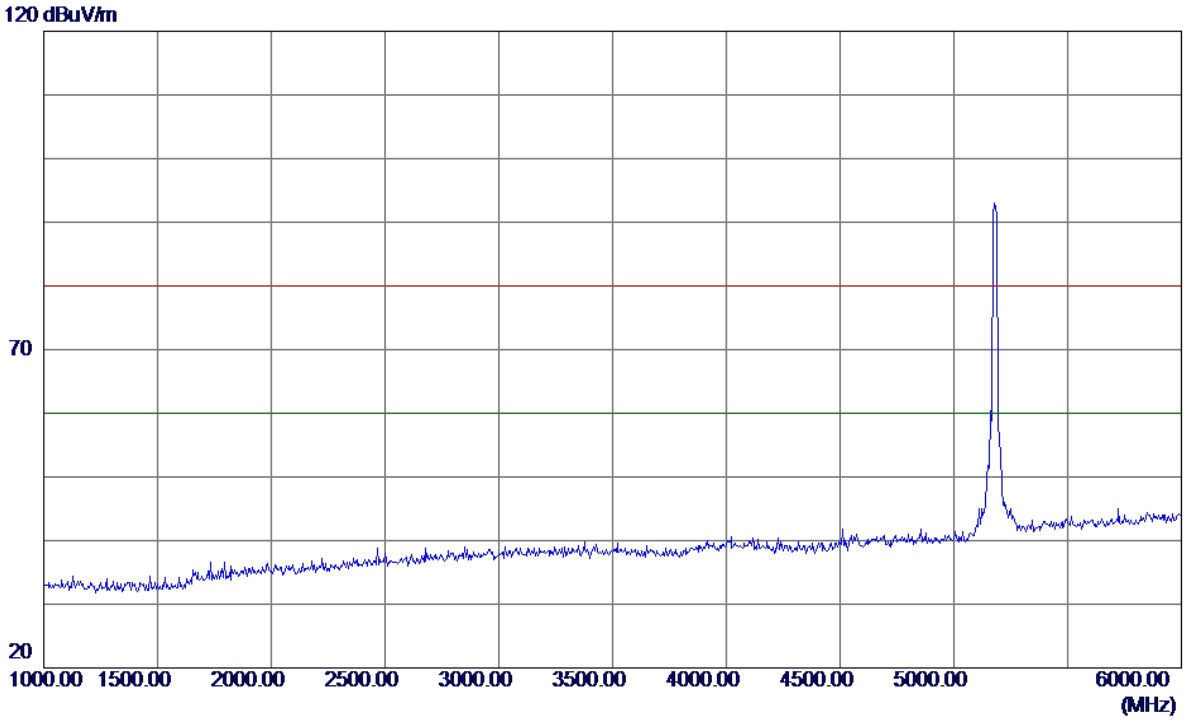


| No. | Freq. | Reading Level | Correct Factor | Measure ment | Limit | Margin | | |
|---|---|---|---|---|---|---|---|---|
| | MHz | dBuV/m | dB | dBuV/m | dBuV/m | dB | Detector | Comment |

| | |
|---|---|
| Orthogonal Axis: | X |
| Test Mode: | UNII-1/ TX AC20 Mode 5180MHz |


**Vertical**

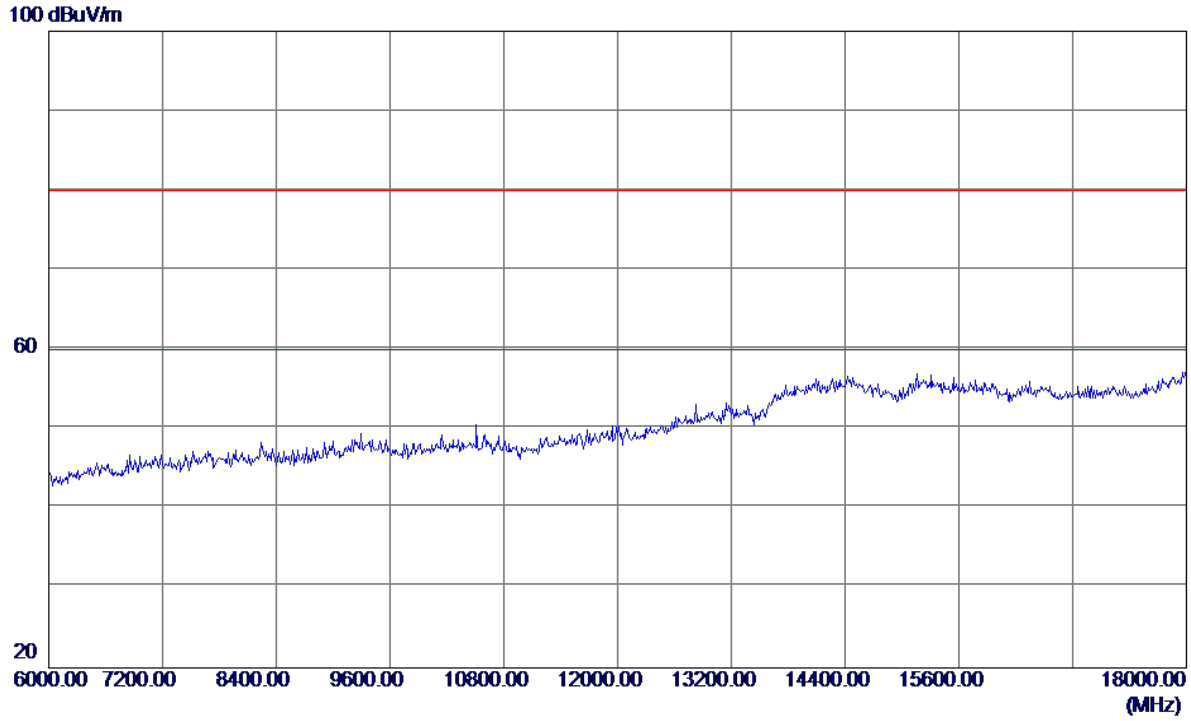


| No. | Freq. | Reading Level | Correct Factor | Measure ment | Limit | Margin | | |
|---|---|---|---|---|---|---|---|---|
| | MHz | dBuV/m | dB | dBuV/m | dBuV/m | dB | Detector | Comment |

| | |
|---|---|
| Orthogonal Axis: | X |
| Test Mode: | UNII-1/ TX AC20 Mode 5180MHz |


**Vertical**

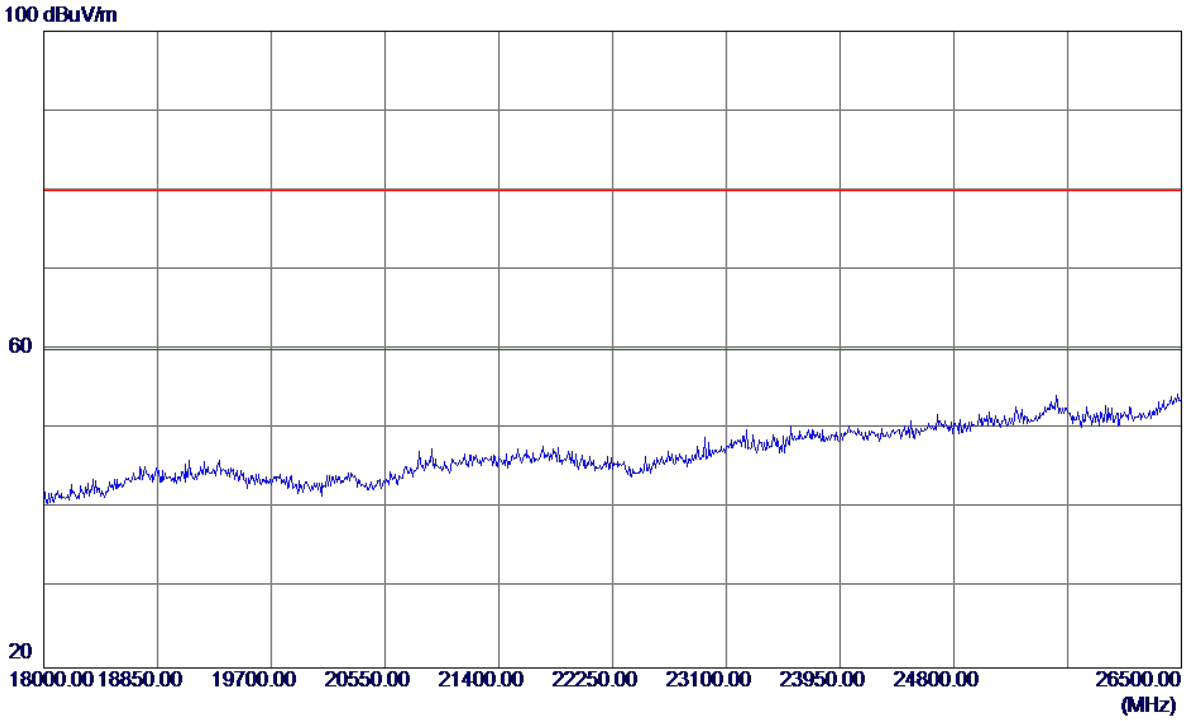


| No. | Freq. | Reading Level | Correct Factor | Measure ment | Limit | Margin | | |
|---|---|---|---|---|---|---|---|---|
| | MHz | dBuV/m | dB | dBuV/m | dBuV/m | dB | Detector | Comment |

| | |
|---|---|
| Orthogonal Axis: | X |
| Test Mode: | UNII-1/ TX AC20 Mode 5180MHz |


**Vertical**

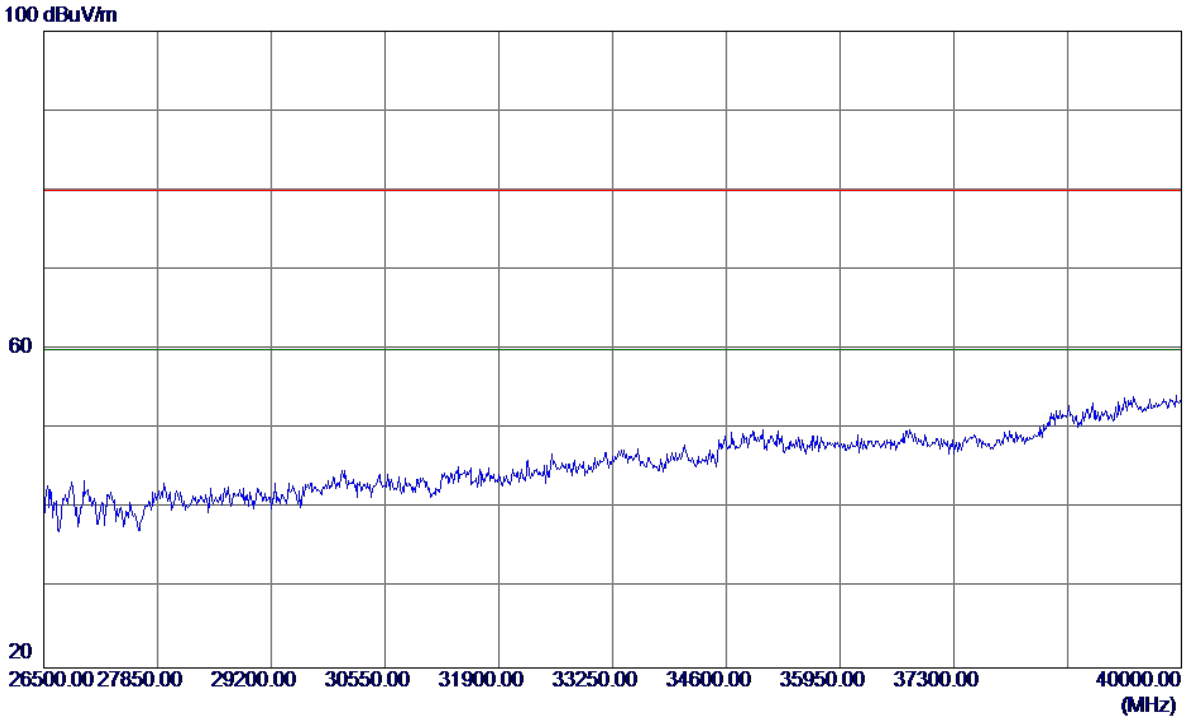


| No. | Freq. | Reading Level | Correct Factor | Measure ment | Limit | Margin | | |
|---|---|---|---|---|---|---|---|---|
| | MHz | dBuV/m | dB | dBuV/m | dBuV/m | dB | Detector | Comment |

| | |
|---|---|
| Orthogonal Axis: | X |
| Test Mode: | UNII-1/ TX AC20 Mode 5180MHz |


**Horizontal**

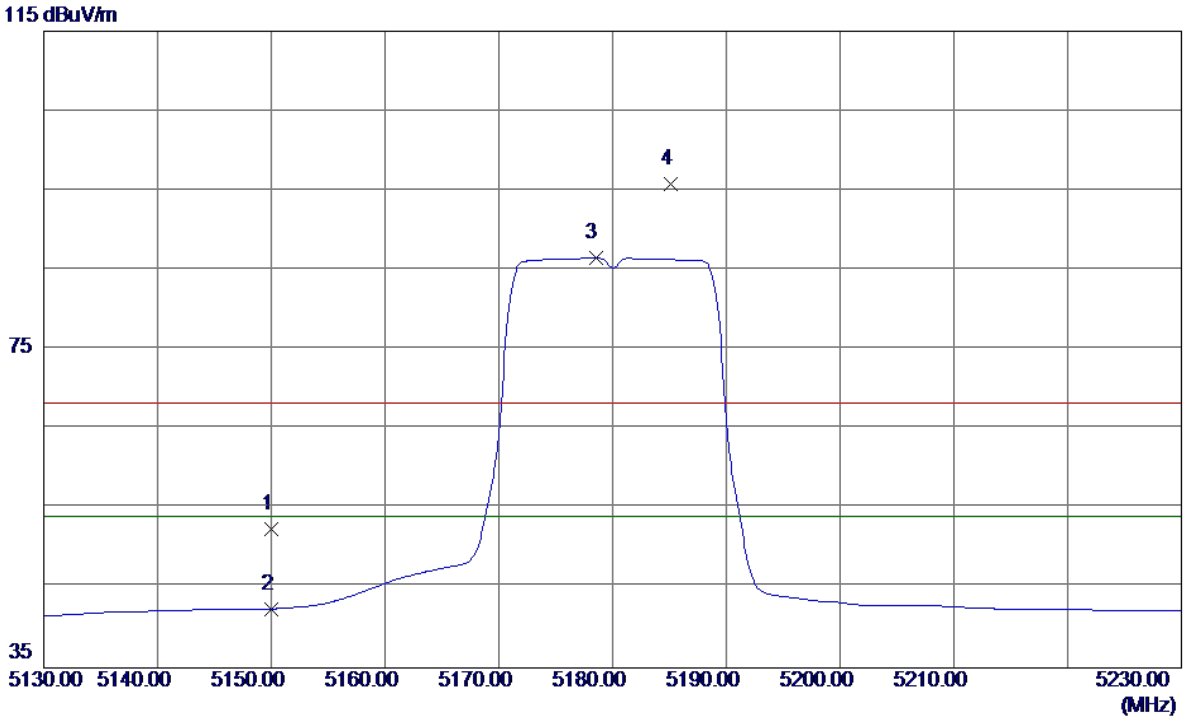


| No. | Freq. | Reading Level | Correct Factor | Measure ment | Limit | Margin | | |
|---|---|---|---|---|---|---|---|---|
| | MHz | dBuV/m | dB | dBuV/m | dBuV/m | dB | Detector | Comment |
| 1 | 5150.0000 | 11.38 | 41.10 | 52.48 | 68.30 | -15.82 | Peak | |
| 2 | 5150.0000 | 1.31 | 41.10 | 42.41 | 54.00 | -11.59 | AVG | |
| 3 * | 5178.5000 | 45.22 | 41.25 | 86.47 | 54.00 | 32.47 | AVG | No Limit |
| 4 | 5185.1000 | 54.55 | 41.28 | 95.83 | 68.30 | 27.53 | Peak | No Limit |

| | |
|---|---|
| Orthogonal Axis: | X |
| Test Mode: | UNII-1/ TX AC20 Mode 5180MHz |


**Horizontal**

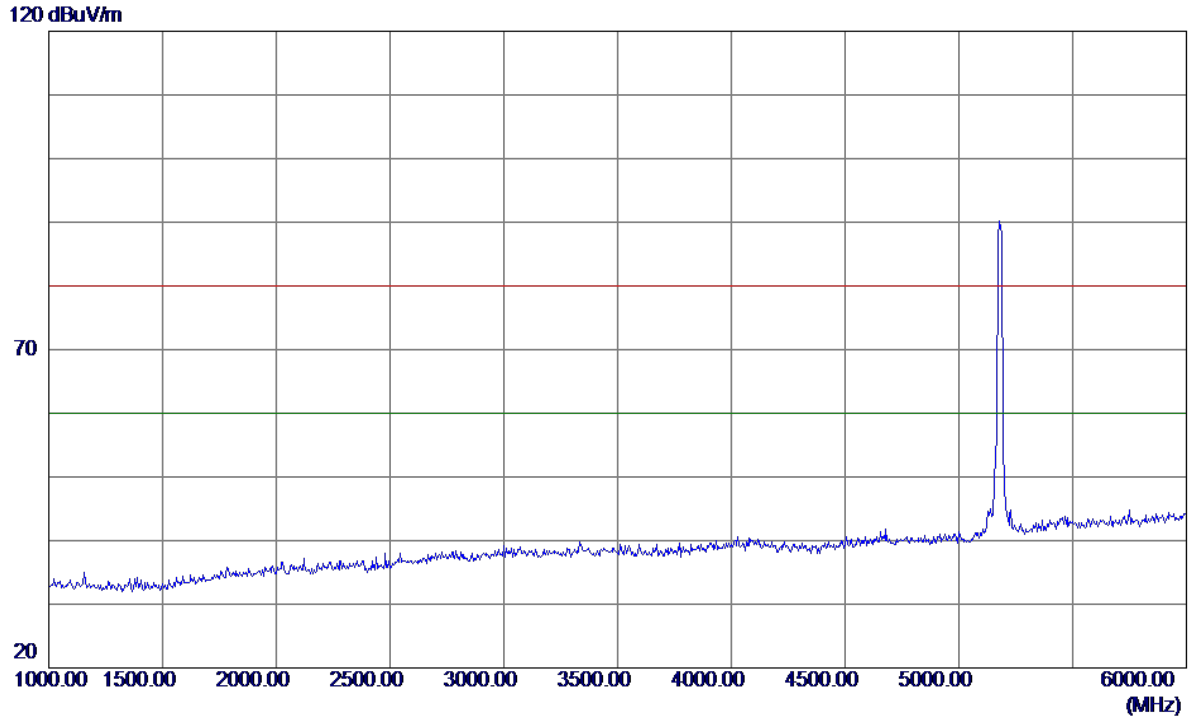


| No. | Freq. | Reading Level | Correct Factor | Measure ment | Limit | Margin | | |
|---|---|---|---|---|---|---|---|---|
| | MHz | dBuV/m | dB | dBuV/m | dBuV/m | dB | Detector | Comment |

| | |
|---|---|
| Orthogonal Axis: | X |
| Test Mode: | UNII-1/ TX AC20 Mode 5180MHz |


**Horizontal**

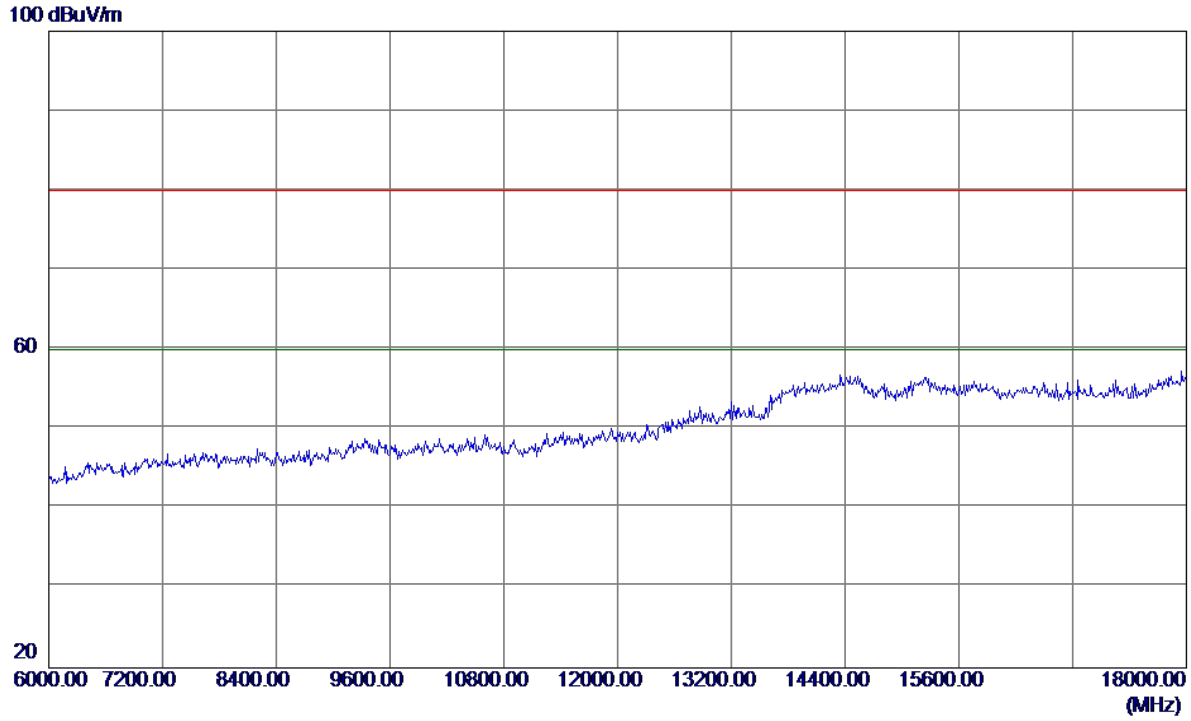


| No. | Freq. | Reading Level | Correct Factor | Measure ment | Limit | Margin | | |
|---|---|---|---|---|---|---|---|---|
| | MHz | dBuV/m | dB | dBuV/m | dBuV/m | dB | Detector | Comment |

| | |
|---|---|
| Orthogonal Axis: | X |
| Test Mode: | UNII-1/ TX AC20 Mode 5180MHz |


**Horizontal**

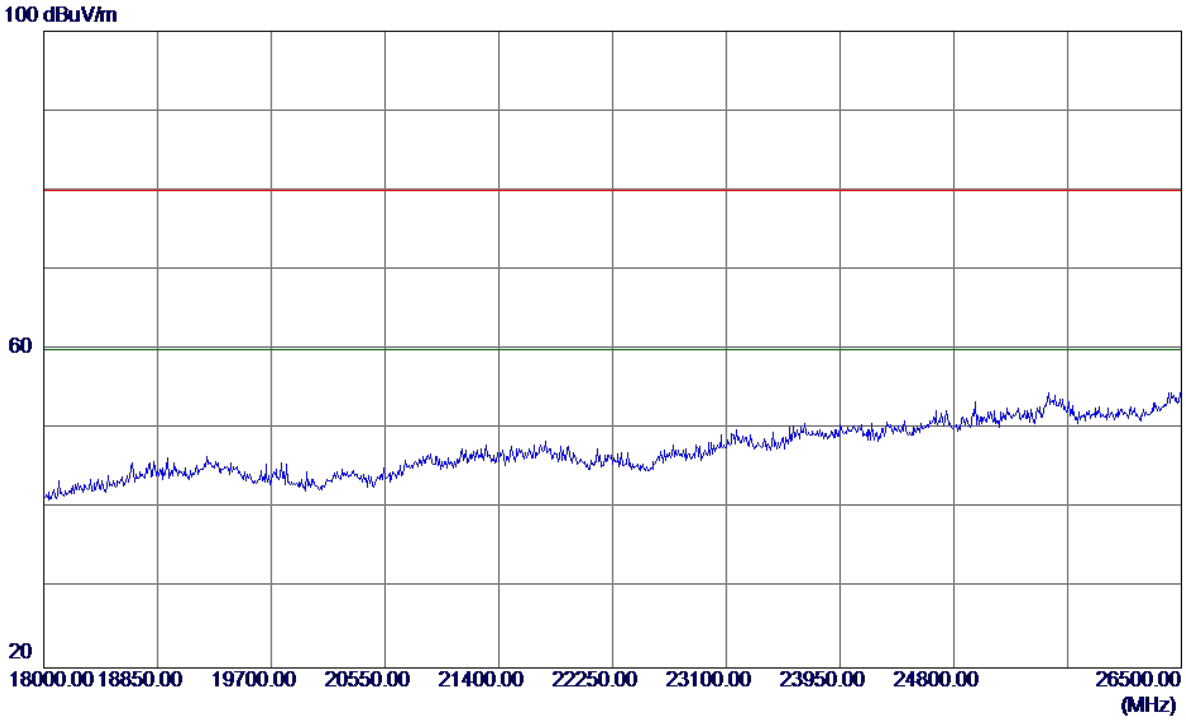


| No. | Freq. | Reading Level | Correct Factor | Measure ment | Limit | Margin | | |
|---|---|---|---|---|---|---|---|---|
| | MHz | dBuV/m | dB | dBuV/m | dBuV/m | dB | Detector | Comment |

| | |
|---|---|
| Orthogonal Axis: | X |
| Test Mode: | UNII-1/ TX AC20 Mode 5180MHz |


**Horizontal**

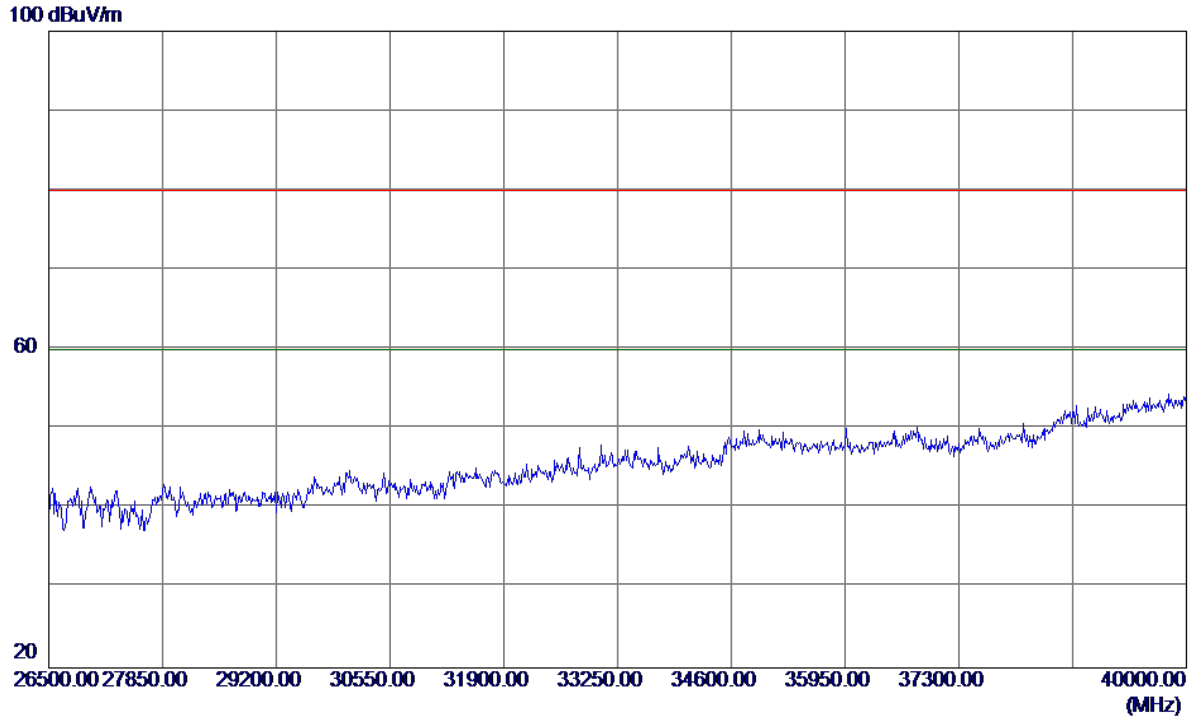


| No. | Freq. | Reading Level | Correct Factor | Measure ment | Limit | Margin | | |
|---|---|---|---|---|---|---|---|---|
| | MHz | dBuV/m | dB | dBuV/m | dBuV/m | dB | Detector | Comment |

| | |
|---|---|
| Orthogonal Axis: | X |
| Test Mode: | UNII-1/ TX AC20 Mode 5240MHz |


**Vertical**

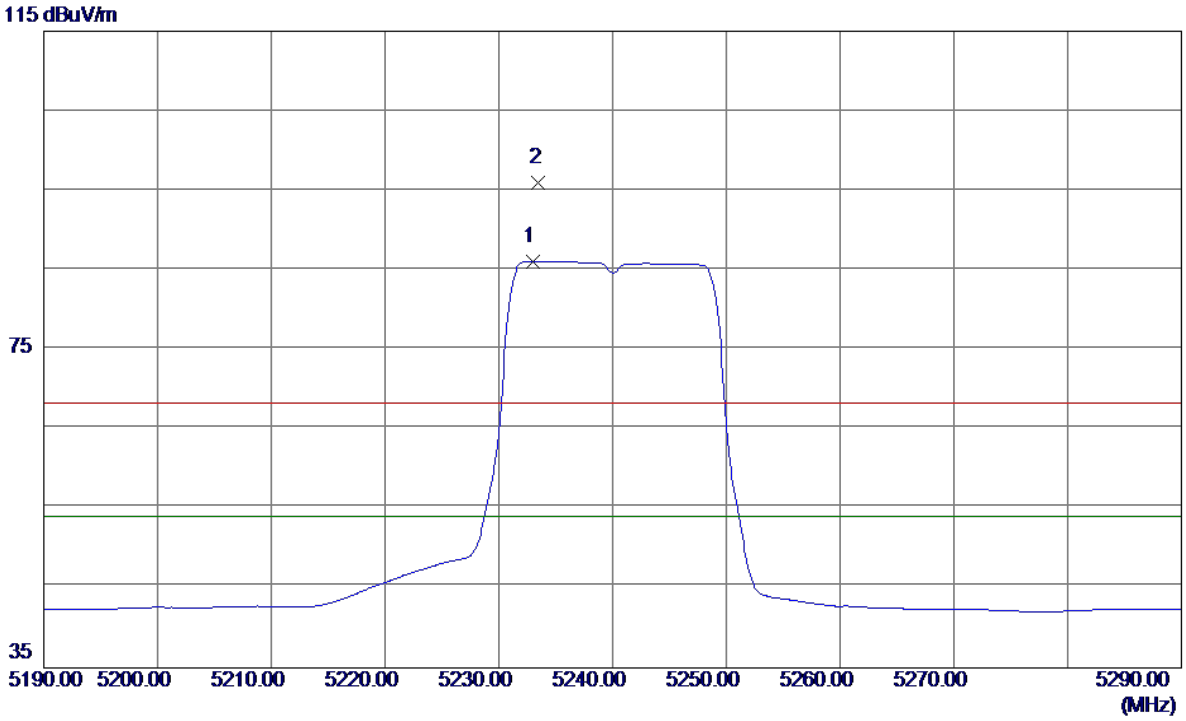


| No. | Freq. | Reading Level | Correct Factor | Measure ment | Limit | Margin | | |
|---|---|---|---|---|---|---|---|---|
| | MHz | dBuV/m | dB | dBuV/m | dBuV/m | dB | Detector | Comment |
| 1 * | 5233.0000 | 44.56 | 41.52 | 86.08 | 54.00 | 32.08 | AVG | No Limit |
| 2 | 5233.5000 | 54.40 | 41.53 | 95.93 | 68.30 | 27.63 | Peak | No Limit |

| | |
|---|---|
| Orthogonal Axis: | X |
| Test Mode: | UNII-1/ TX AC20 Mode 5240MHz |


**Vertical**

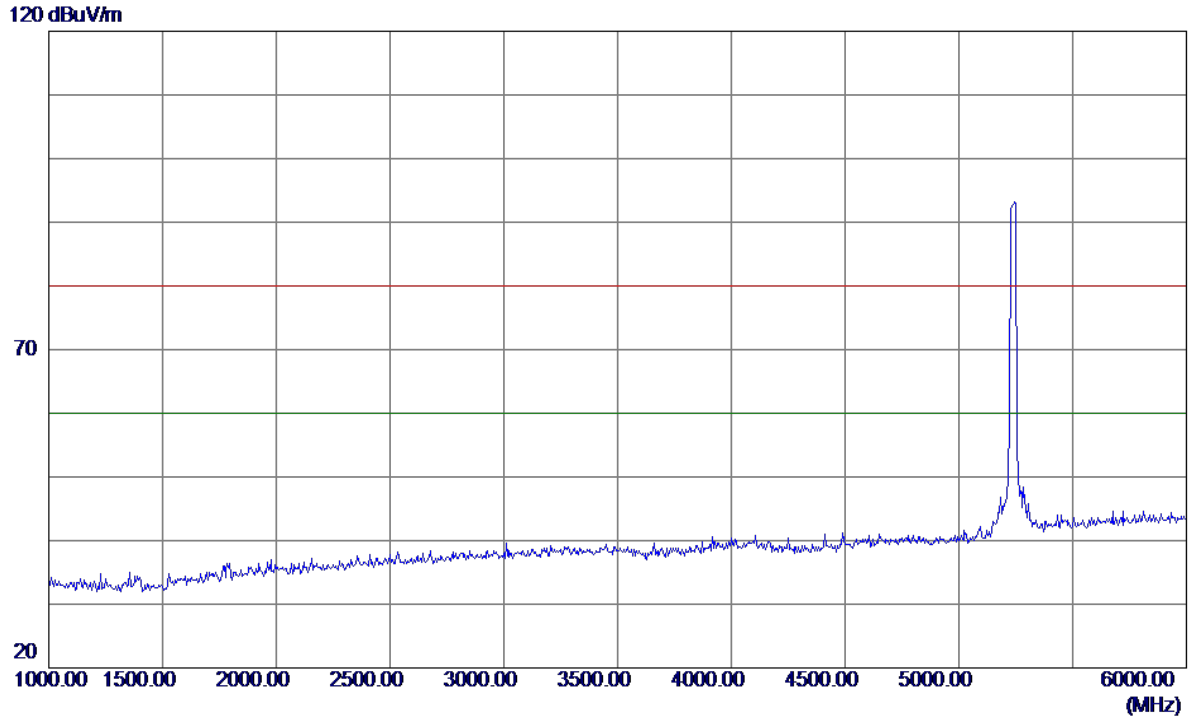


| No. | Freq. | Reading Level | Correct Factor | Measure ment | Limit | Margin | | |
|---|---|---|---|---|---|---|---|---|
| | MHz | dBuV/m | dB | dBuV/m | dBuV/m | dB | Detector | Comment |

| | |
|---|---|
| Orthogonal Axis: | X |
| Test Mode: | UNII-1/ TX AC20 Mode 5240MHz |


**Vertical**

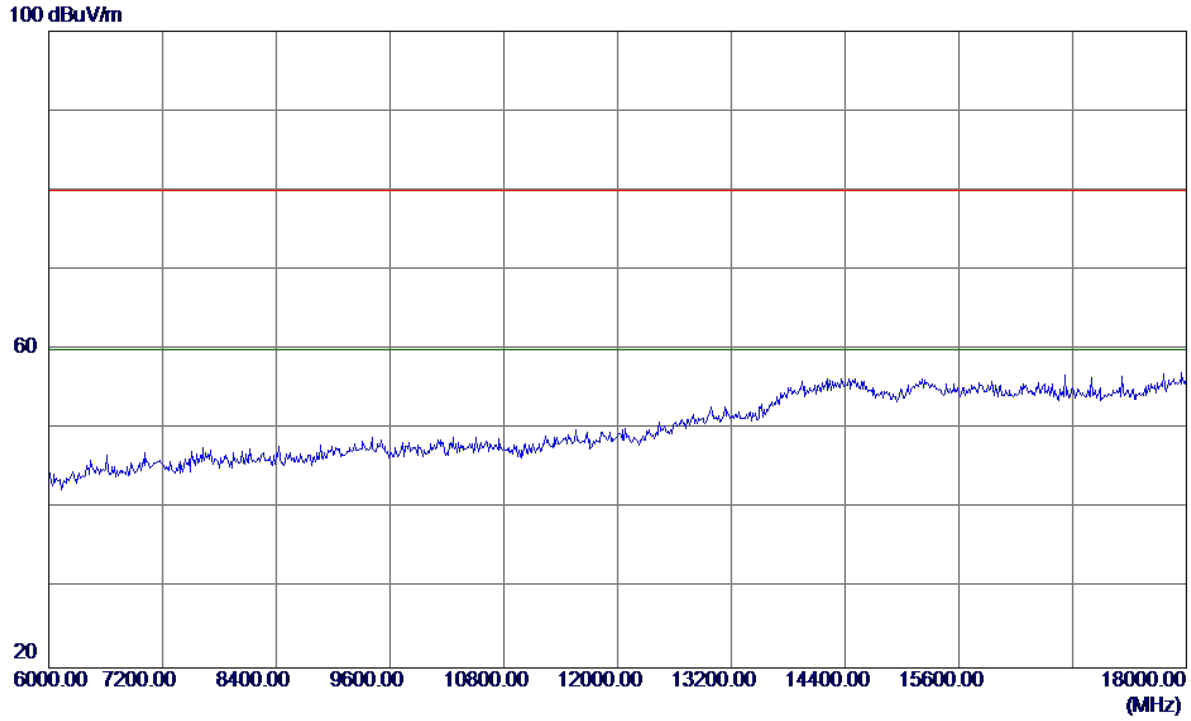


| No. | Freq. | Reading Level | Correct Factor | Measure ment | Limit | Margin | | |
|---|---|---|---|---|---|---|---|---|
| | MHz | dBuV/m | dB | dBuV/m | dBuV/m | dB | Detector | Comment |

| | |
|---|---|
| Orthogonal Axis: | X |
| Test Mode: | UNII-1/ TX AC20 Mode 5240MHz |


**Vertical**

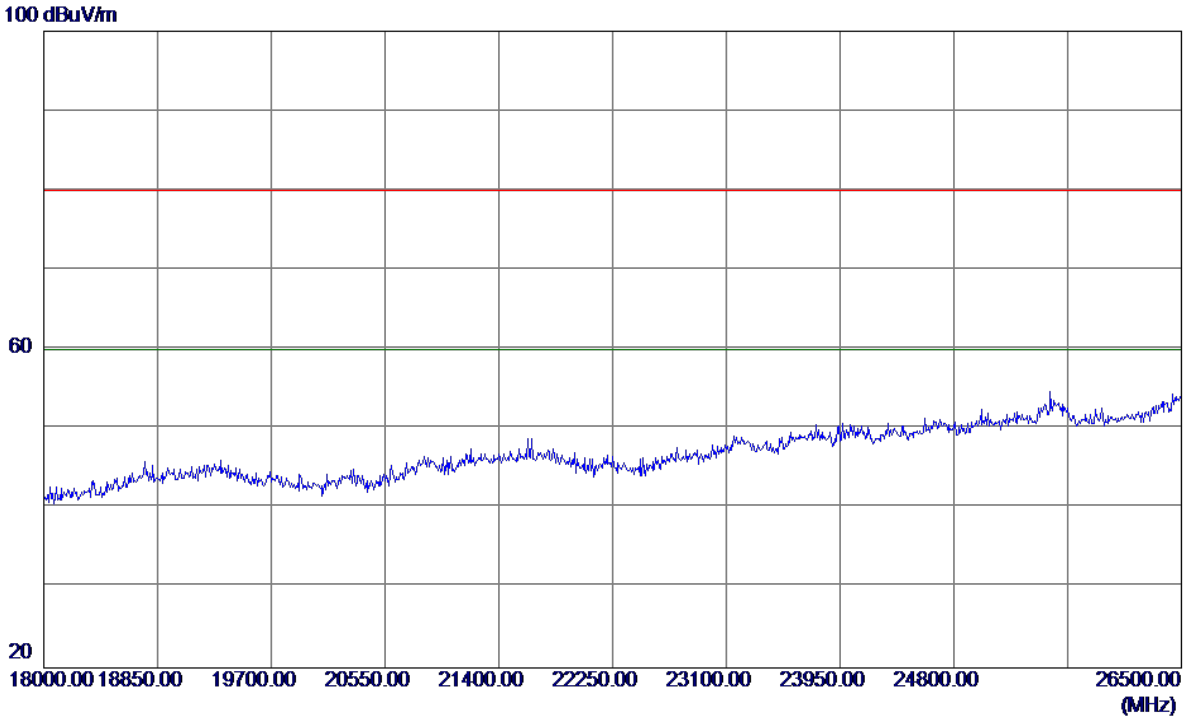


| No. | Freq. | Reading Level | Correct Factor | Measure ment | Limit | Margin | | |
|---|---|---|---|---|---|---|---|---|
| | MHz | dBuV/m | dB | dBuV/m | dBuV/m | dB | Detector | Comment |

| | |
|---|---|
| Orthogonal Axis: | X |
| Test Mode: | UNII-1/ TX AC20 Mode 5240MHz |


**Vertical**

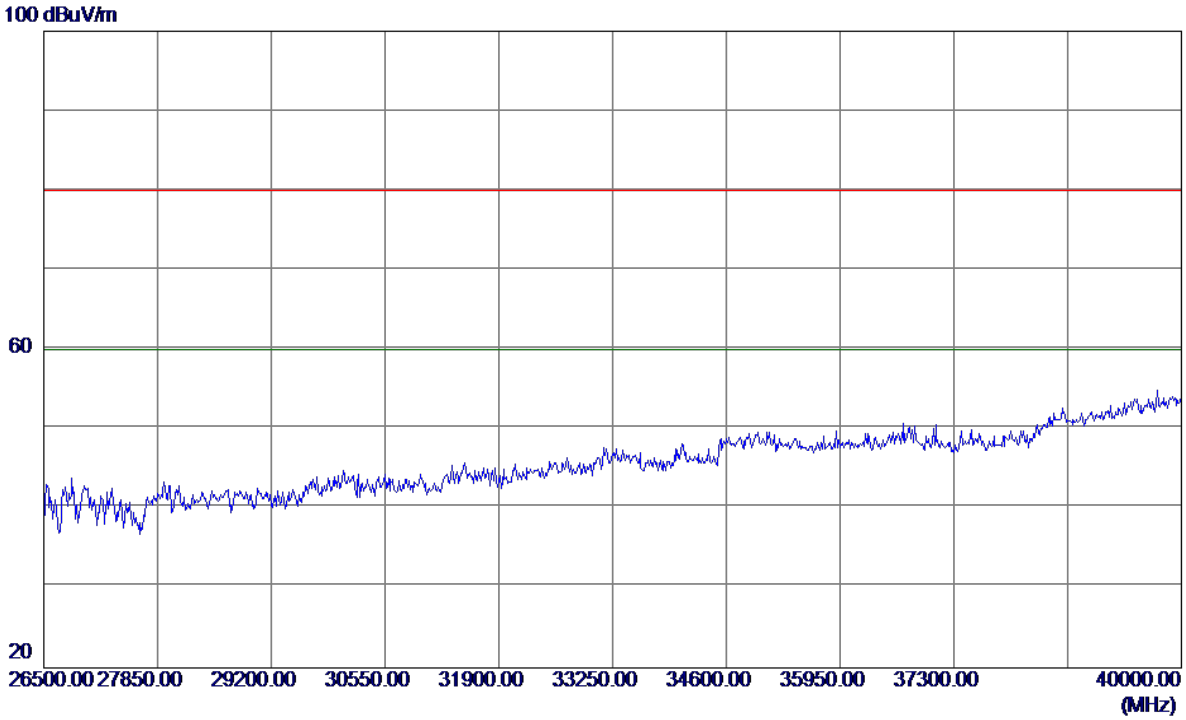


| No. | Freq. | Reading Level | Correct Factor | Measure ment | Limit | Margin | | |
|---|---|---|---|---|---|---|---|---|
| | MHz | dBuV/m | dB | dBuV/m | dBuV/m | dB | Detector | Comment |

| | |
|---|---|
| Orthogonal Axis: | X |
| Test Mode: | UNII-1/ TX AC20 Mode 5240MHz |


**Horizontal**

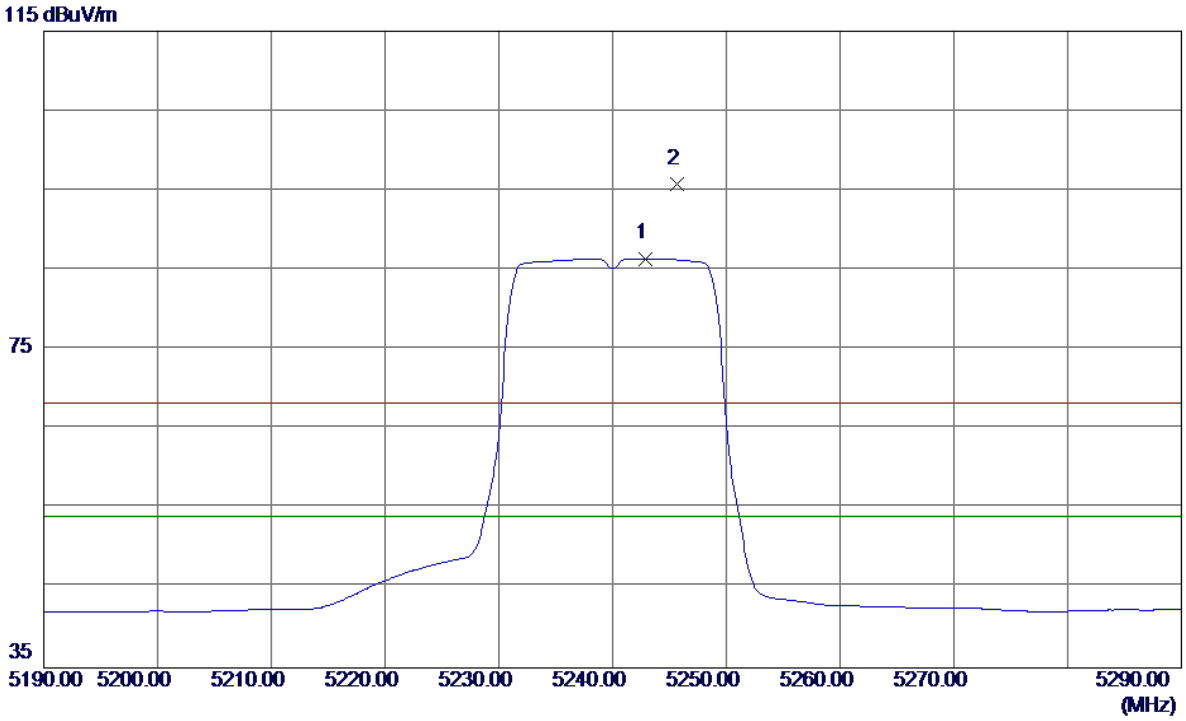


| No. | Freq. | Reading Level | Correct Factor | Measure ment | Limit | Margin | | |
|---|---|---|---|---|---|---|---|---|
| | MHz | dBuV/m | dB | dBuV/m | dBuV/m | dB | Detector | Comment |
| 1 * | 5242.9000 | 44.87 | 41.57 | 86.44 | 54.00 | 32.44 | AVG | No Limit |
| 2 | 5245.7000 | 54.24 | 41.59 | 95.83 | 68.30 | 27.53 | Peak | No Limit |

| | |
|---|---|
| Orthogonal Axis: | X |
| Test Mode: | UNII-1/ TX AC20 Mode 5240MHz |


**Horizontal**

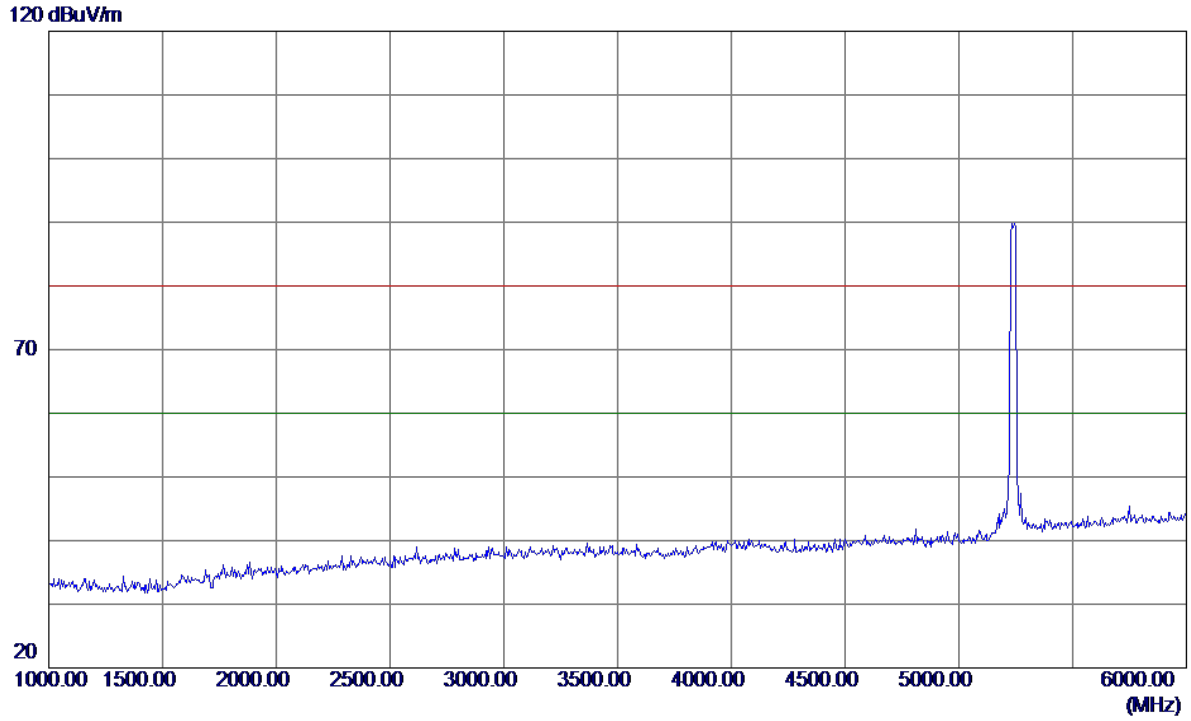


| No. | Freq. | Reading Level | Correct Factor | Measure ment | Limit | Margin | | |
|---|---|---|---|---|---|---|---|---|
| | MHz | dBuV/m | dB | dBuV/m | dBuV/m | dB | Detector | Comment |

| | |
|---|---|
| Orthogonal Axis: | X |
| Test Mode: | UNII-1/ TX AC20 Mode 5240MHz |


**Horizontal**

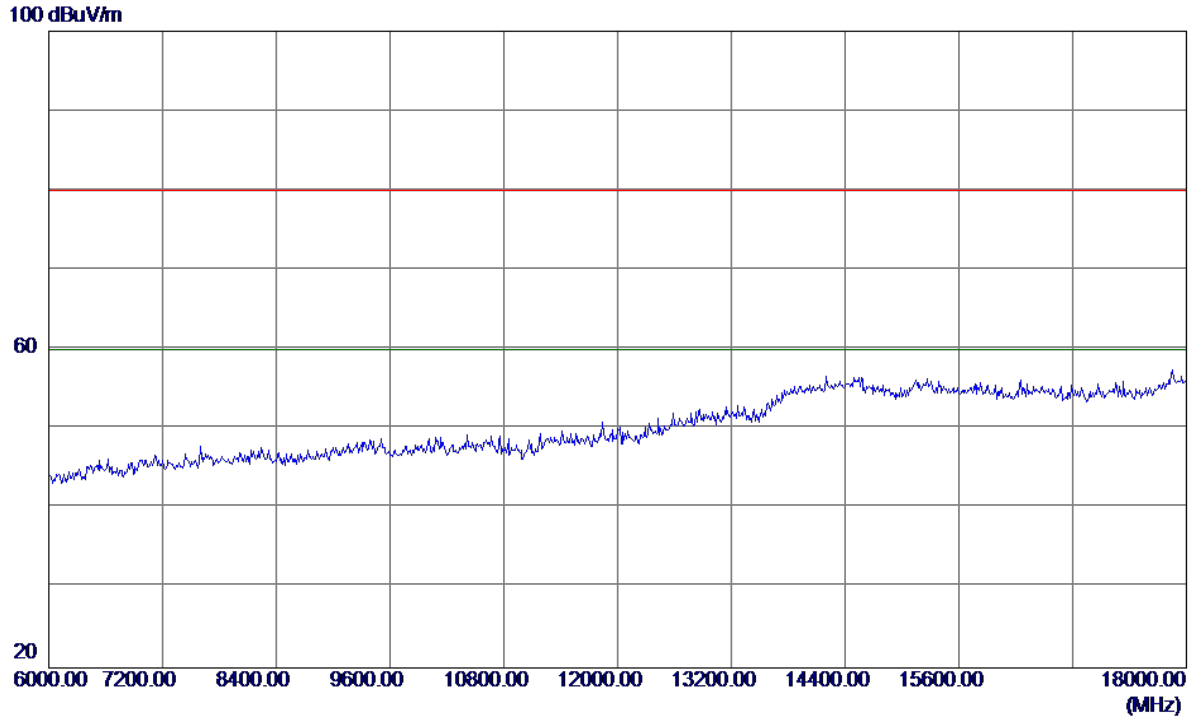


| No. | Freq. | Reading Level | Correct Factor | Measure ment | Limit | Margin | | |
|---|---|---|---|---|---|---|---|---|
| | MHz | dBuV/m | dB | dBuV/m | dBuV/m | dB | Detector | Comment |

| | |
|---|---|
| Orthogonal Axis: | X |
| Test Mode: | UNII-1/ TX AC20 Mode 5240MHz |


**Horizontal**

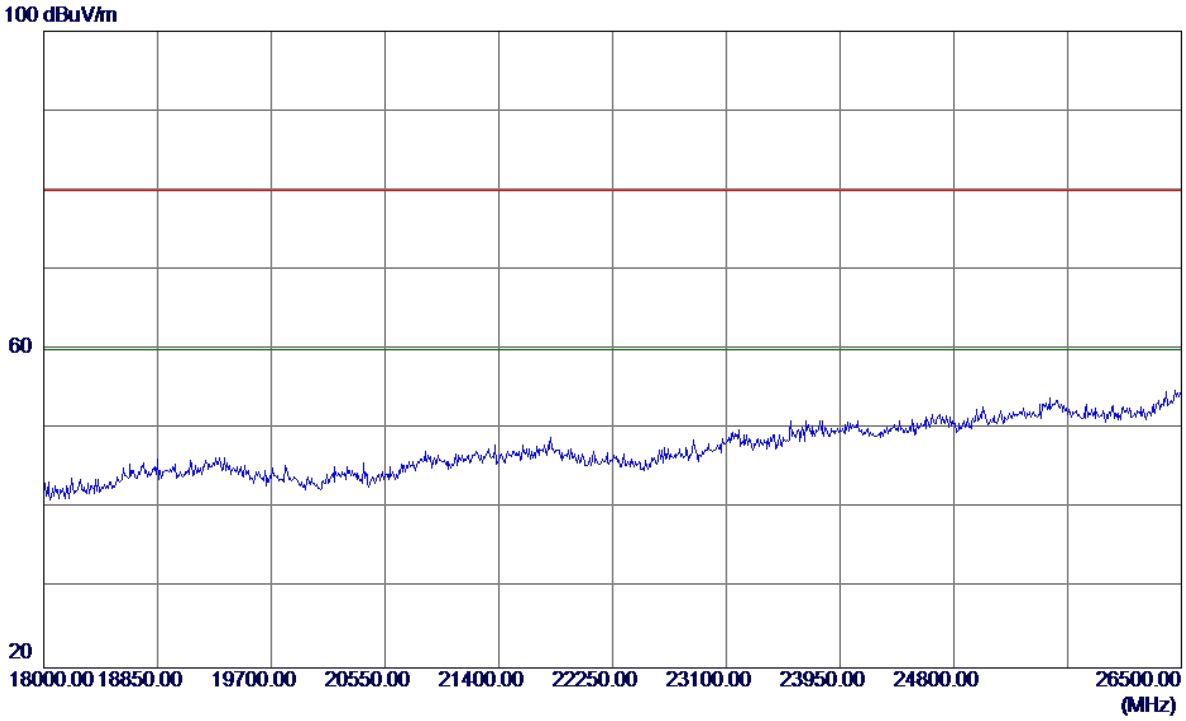


| No. | Freq. | Reading Level | Correct Factor | Measure ment | Limit | Margin | | |
|---|---|---|---|---|---|---|---|---|
| | MHz | dBuV/m | dB | dBuV/m | dBuV/m | dB | Detector | Comment |

| | |
|---|---|
| Orthogonal Axis: | X |
| Test Mode: | UNII-1/ TX AC20 Mode 5240MHz |


**Horizontal**

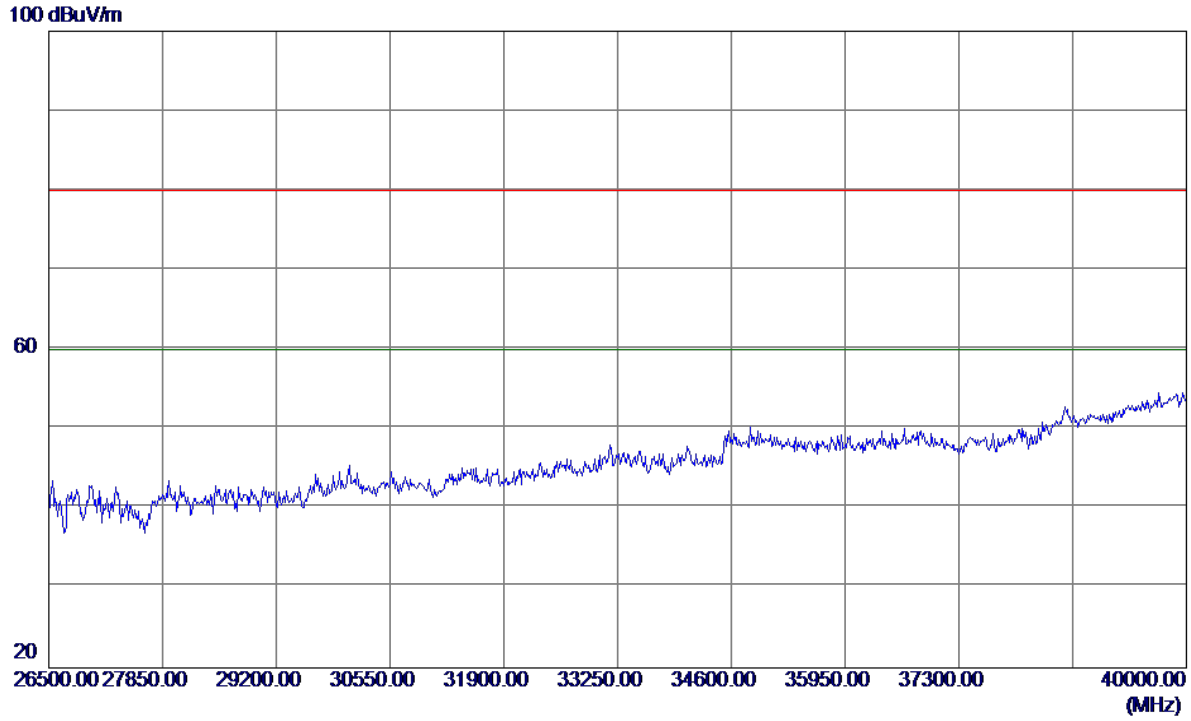


| No. | Freq. | Reading Level | Correct Factor | Measure ment | Limit | Margin | | |
|---|---|---|---|---|---|---|---|---|
| | MHz | dBuV/m | dB | dBuV/m | dBuV/m | dB | Detector | Comment |

| | |
|---|---|
| Orthogonal Axis: | X |
| Test Mode: | UNII-1/ TX AC40 Mode 5190MHz |


**Vertical**

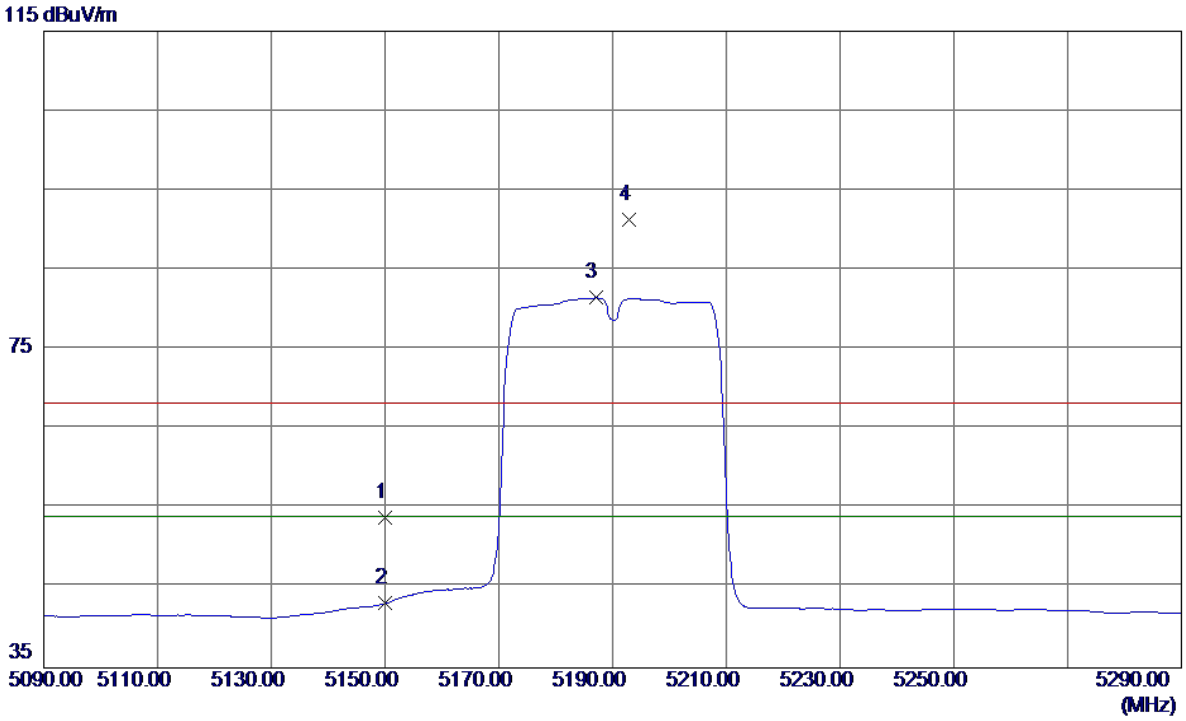


| No. | Freq. | Reading Level | Correct Factor | Measure ment | Limit | Margin | | |
|---|---|---|---|---|---|---|---|---|
| | MHz | dBuV/m | dB | dBuV/m | dBuV/m | dB | Detector | Comment |
| 1 | 5150.0000 | 12.85 | 41.10 | 53.95 | 68.30 | -14.35 | Peak | |
| 2 | 5150.0000 | 1.99 | 41.10 | 43.09 | 54.00 | -10.91 | AVG | |
| 3 * | 5187.0000 | 40.21 | 41.29 | 81.50 | 54.00 | 27.50 | AVG | No Limit |
| 4 | 5192.8000 | 50.04 | 41.32 | 91.36 | 68.30 | 23.06 | Peak | No Limit |

| | |
|---|---|
| Orthogonal Axis: | X |
| Test Mode: | UNII-1/ TX AC40 Mode 5190MHz |


**Vertical**

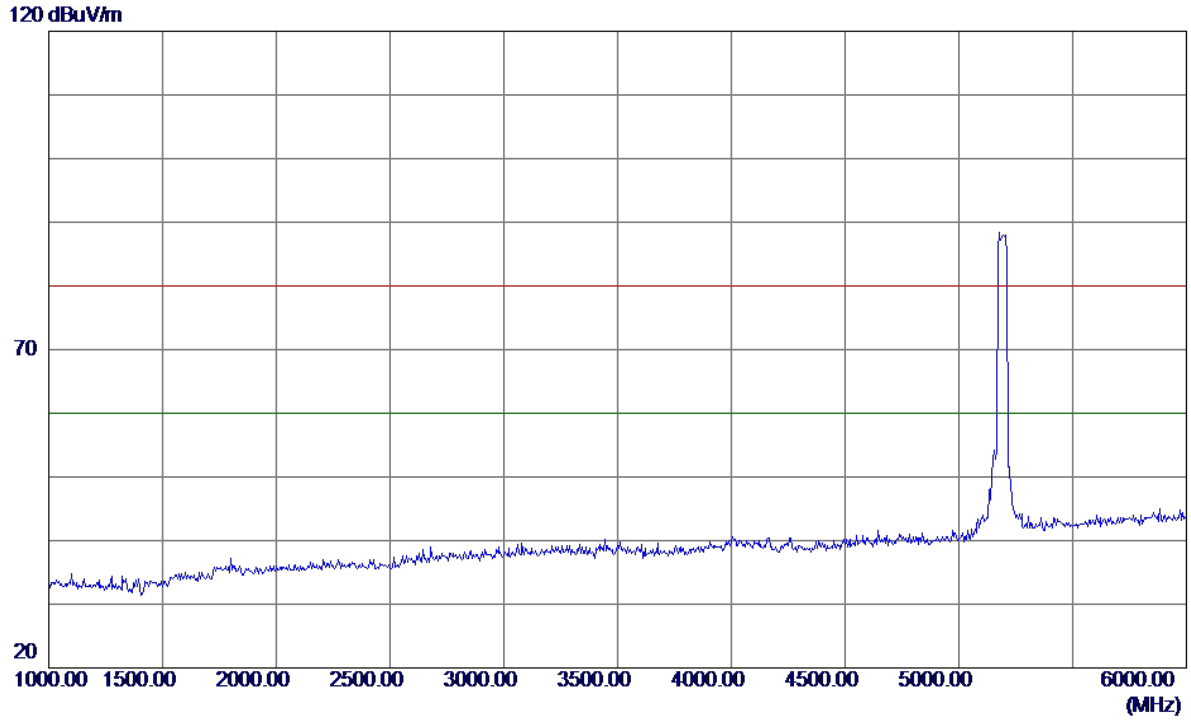


| No. | Freq. | Reading Level | Correct Factor | Measure ment | Limit | Margin | | |
|---|---|---|---|---|---|---|---|---|
| | MHz | dBuV/m | dB | dBuV/m | dBuV/m | dB | Detector | Comment |

| | |
|---|---|
| Orthogonal Axis: | X |
| Test Mode: | UNII-1/ TX AC40 Mode 5190MHz |


**Vertical**

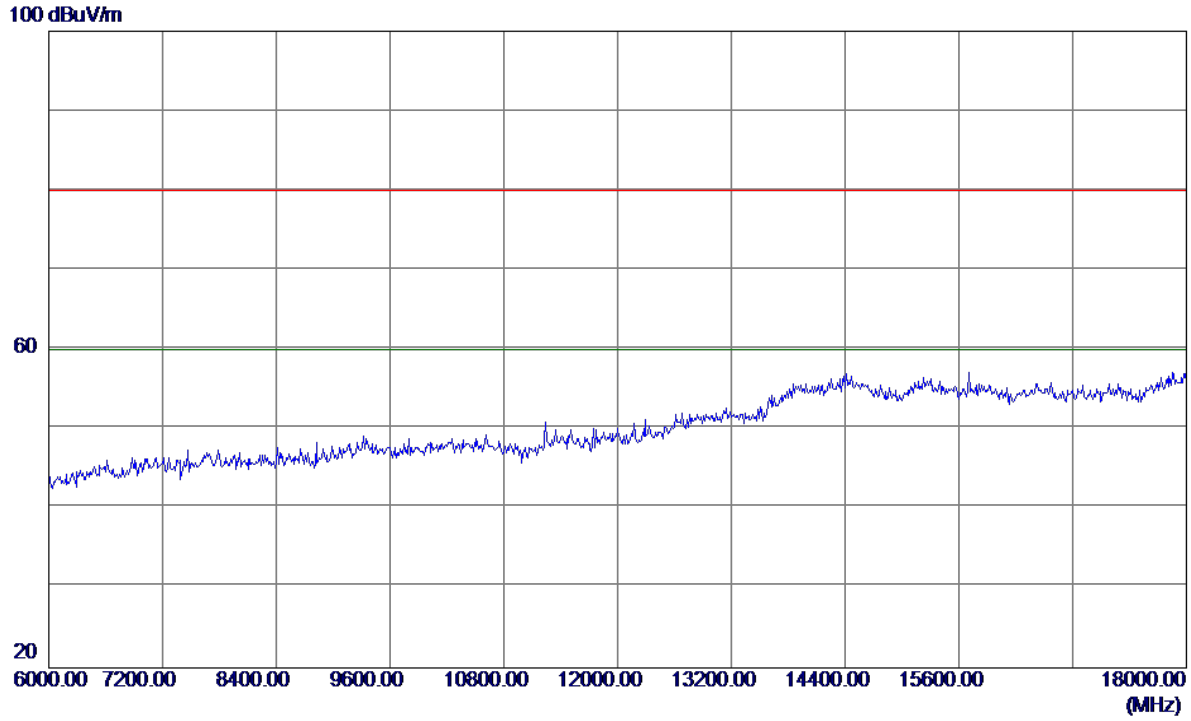


| No. | Freq. | Reading Level | Correct Factor | Measure ment | Limit | Margin | | |
|---|---|---|---|---|---|---|---|---|
| | MHz | dBuV/m | dB | dBuV/m | dBuV/m | dB | Detector | Comment |

| | |
|---|---|
| Orthogonal Axis: | X |
| Test Mode: | UNII-1/ TX AC40 Mode 5190MHz |


**Vertical**

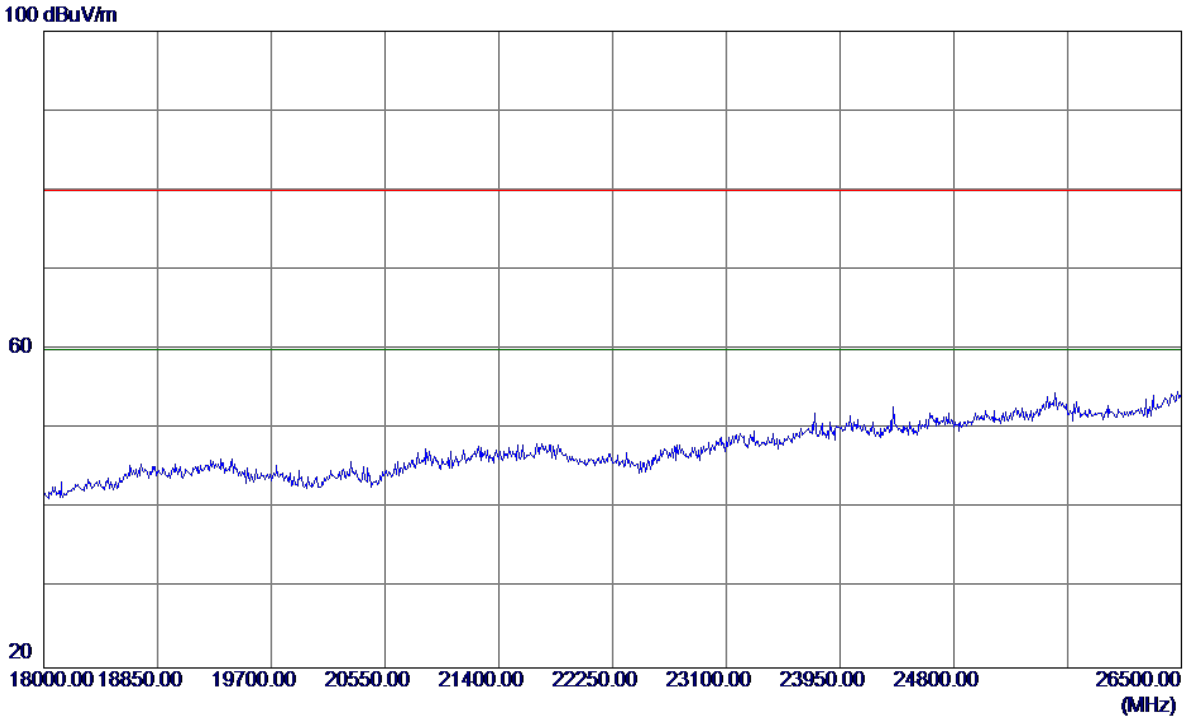


| No. | Freq. | Reading Level | Correct Factor | Measure ment | Limit | Margin | | |
|---|---|---|---|---|---|---|---|---|
| | MHz | dBuV/m | dB | dBuV/m | dBuV/m | dB | Detector | Comment |

| | |
|---|---|
| Orthogonal Axis: | X |
| Test Mode: | UNII-1/ TX AC40 Mode 5190MHz |


**Vertical**

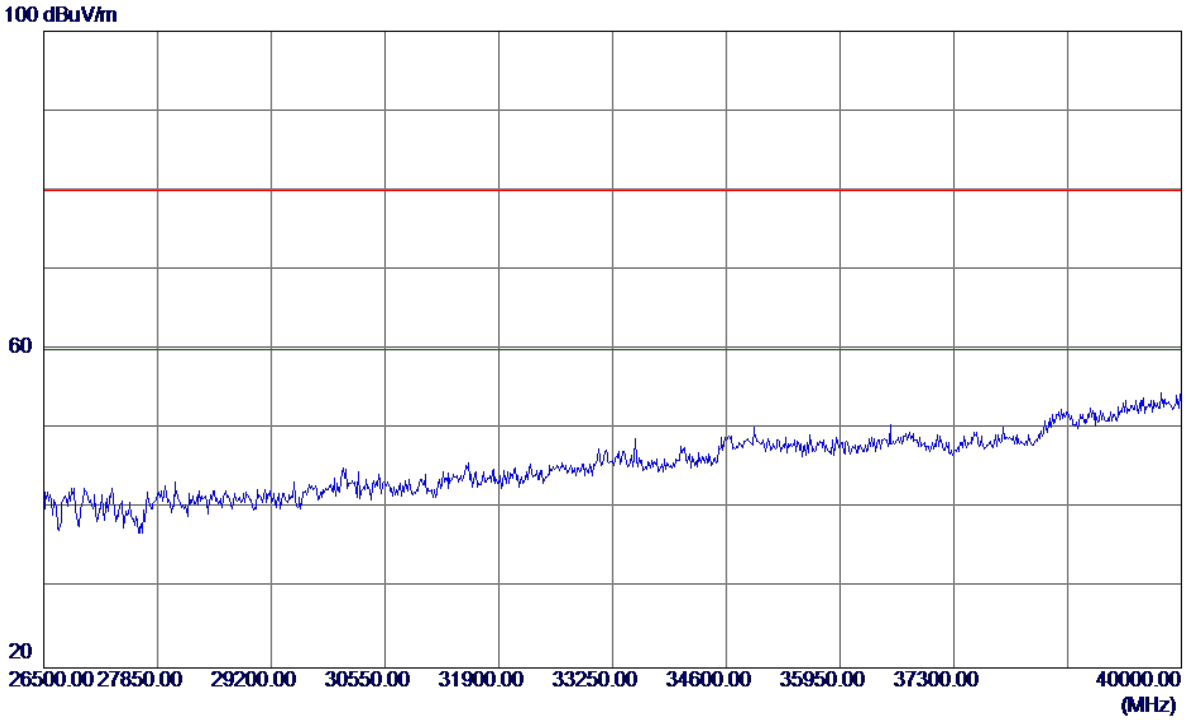


| No. | Freq. | Reading Level | Correct Factor | Measure ment | Limit | Margin | | |
|---|---|---|---|---|---|---|---|---|
| | MHz | dBuV/m | dB | dBuV/m | dBuV/m | dB | Detector | Comment |

| | |
|---|---|
| Orthogonal Axis: | X |
| Test Mode: | UNII-1/ TX AC40 Mode 5190MHz |


**Horizontal**

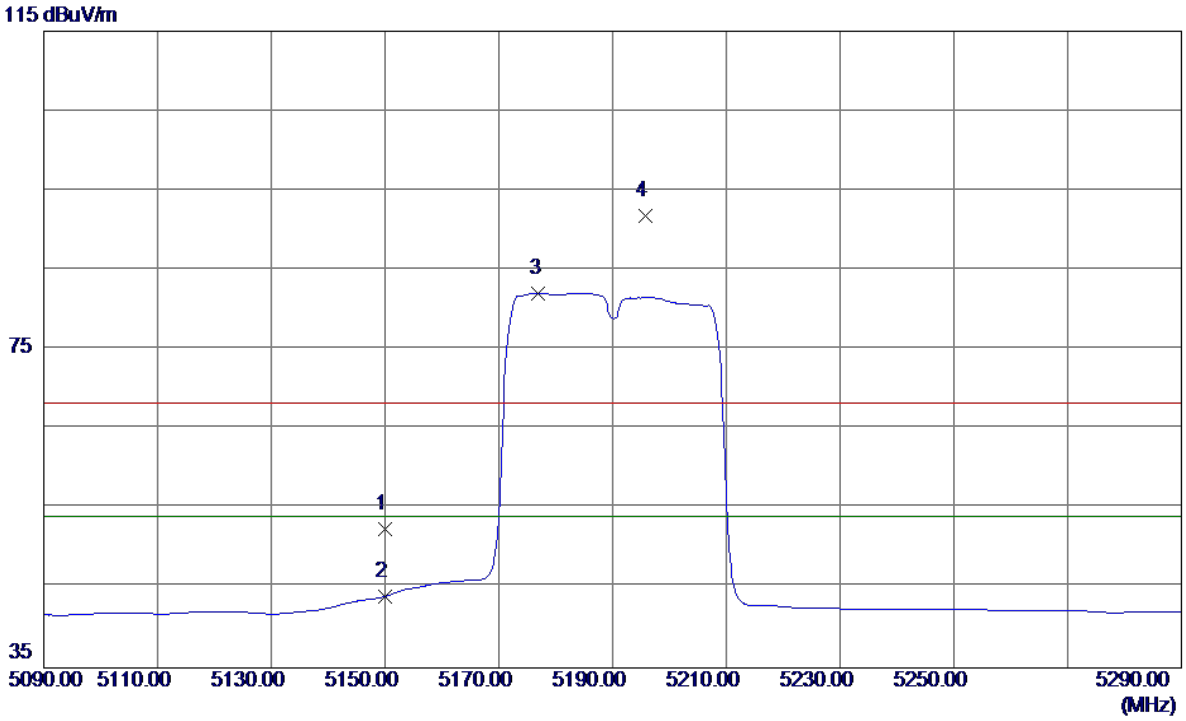


| No. | Freq. | Reading Level | Correct Factor | Measure ment | Limit | Margin | | |
|---|---|---|---|---|---|---|---|---|
| | MHz | dBuV/m | dB | dBuV/m | dBuV/m | dB | Detector | Comment |
| 1 | 5150.0000 | 11.40 | 41.10 | 52.50 | 68.30 | -15.80 | Peak | |
| 2 | 5150.0000 | 2.86 | 41.10 | 43.96 | 54.00 | -10.04 | AVG | |
| 3 * | 5177.0000 | 40.82 | 41.24 | 82.06 | 54.00 | 28.06 | AVG | No Limit |
| 4 | 5195.8000 | 50.43 | 41.33 | 91.76 | 68.30 | 23.46 | Peak | No Limit |

| | |
|---|---|
| Orthogonal Axis: | X |
| Test Mode: | UNII-1/ TX AC40 Mode 5190MHz |


**Horizontal**

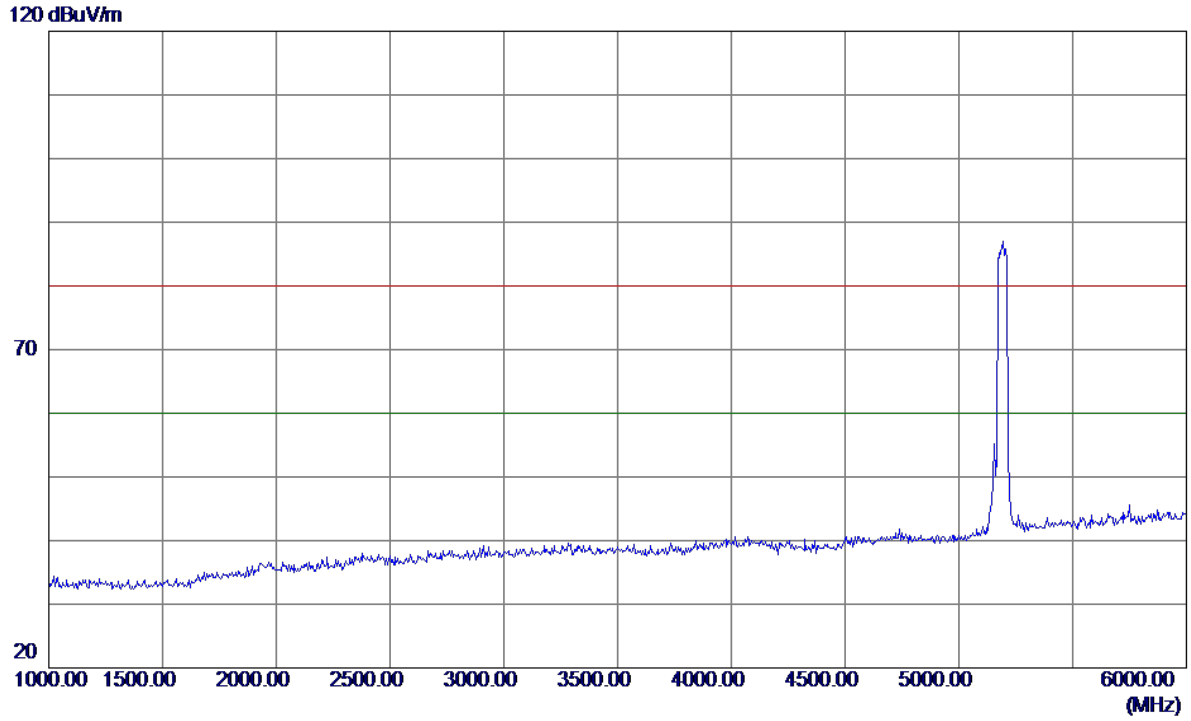


| No. | Freq. | Reading Level | Correct Factor | Measure ment | Limit | Margin | | |
|---|---|---|---|---|---|---|---|---|
| | MHz | dBuV/m | dB | dBuV/m | dBuV/m | dB | Detector | Comment |

| | |
|---|---|
| Orthogonal Axis: | X |
| Test Mode: | UNII-1/ TX AC40 Mode 5190MHz |


**Horizontal**

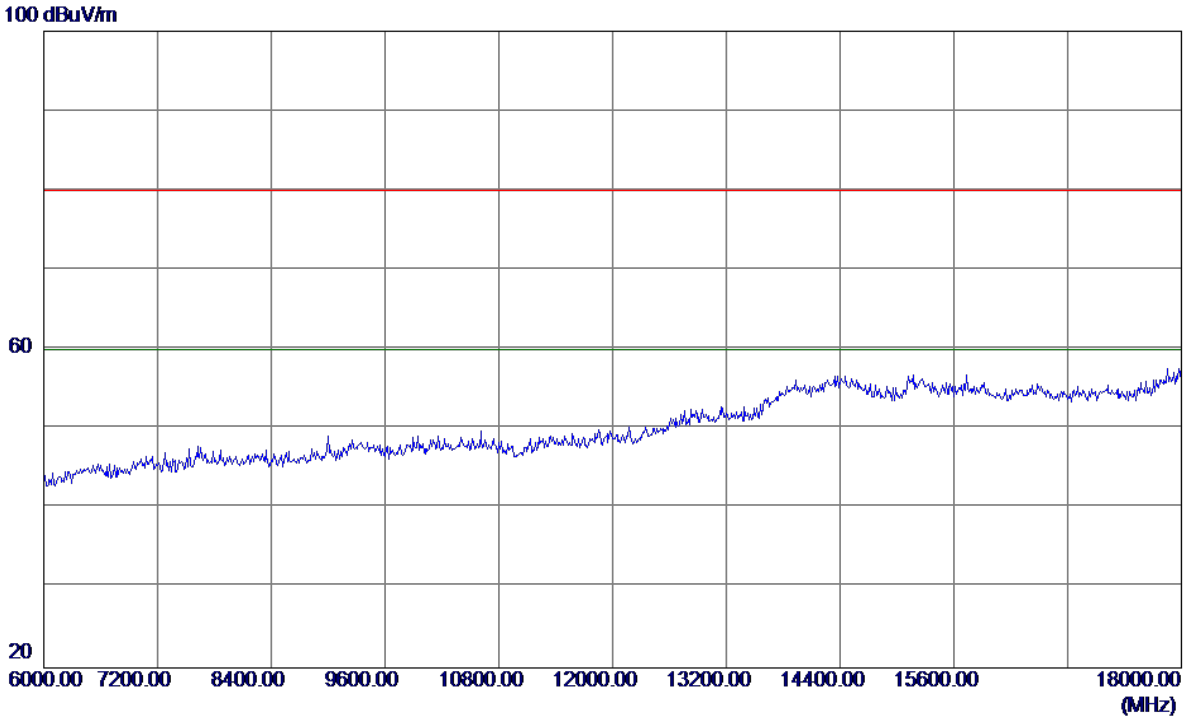


| No. | Freq. | Reading Level | Correct Factor | Measure ment | Limit | Margin | | |
|---|---|---|---|---|---|---|---|---|
| | MHz | dBuV/m | dB | dBuV/m | dBuV/m | dB | Detector | Comment |

| | |
|---|---|
| Orthogonal Axis: | X |
| Test Mode: | UNII-1/ TX AC40 Mode 5190MHz |


**Horizontal**

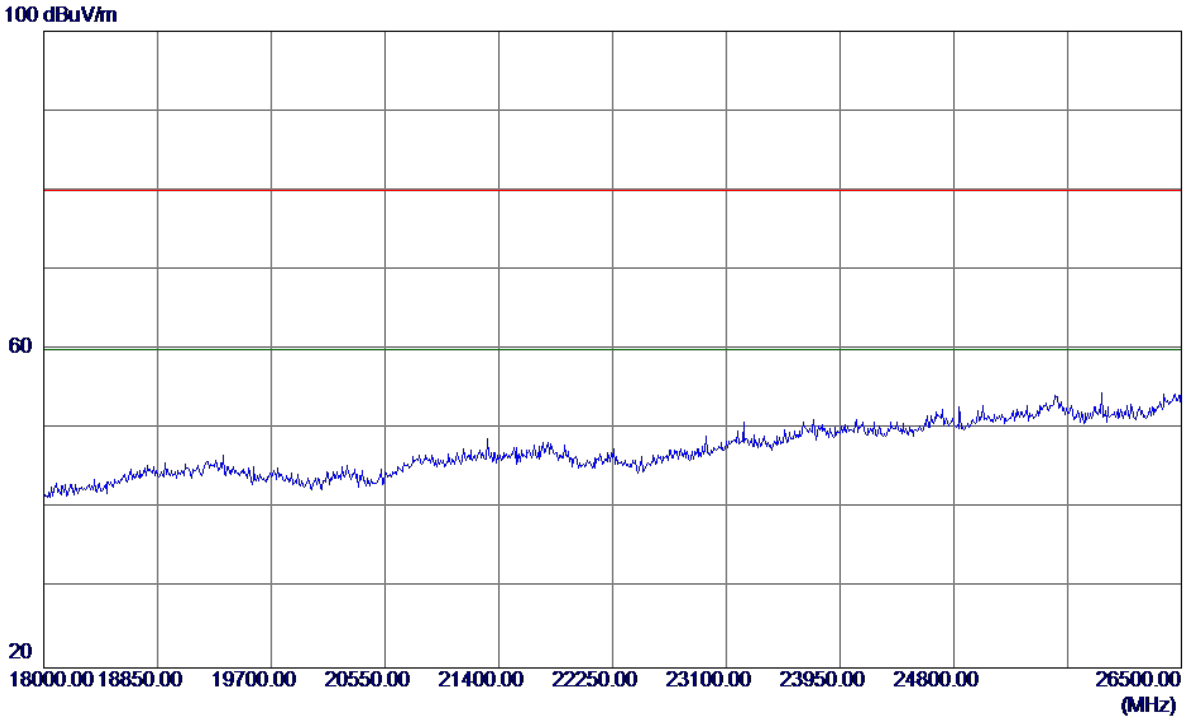


| No. | Freq. | Reading Level | Correct Factor | Measure ment | Limit | Margin | | |
|---|---|---|---|---|---|---|---|---|
| | MHz | dBuV/m | dB | dBuV/m | dBuV/m | dB | Detector | Comment |

| | |
|---|---|
| Orthogonal Axis: | X |
| Test Mode: | UNII-1/ TX AC40 Mode 5190MHz |


**Horizontal**

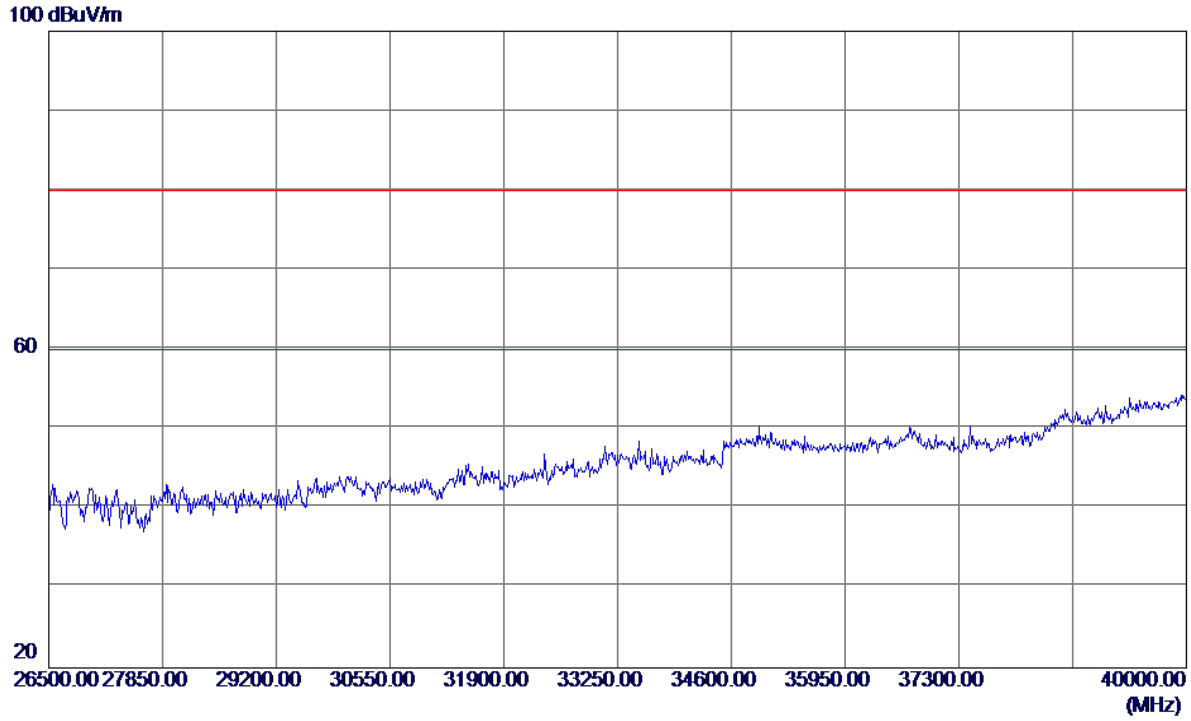


| No. | Freq. | Reading Level | Correct Factor | Measure ment | Limit | Margin | | |
|---|---|---|---|---|---|---|---|---|
| | MHz | dBuV/m | dB | dBuV/m | dBuV/m | dB | Detector | Comment |

| | |
|---|---|
| Orthogonal Axis: | X |
| Test Mode: | UNII-1/ TX AC40 Mode 5230MHz |


**Vertical**

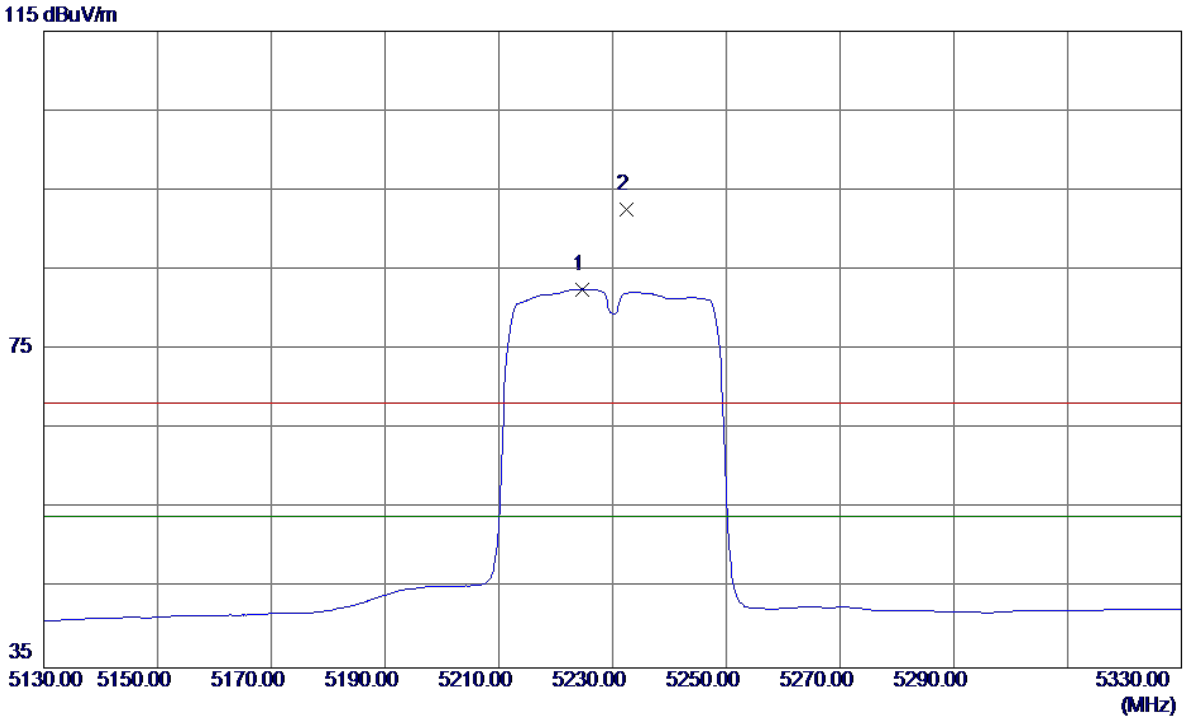


| No. | Freq. | Reading Level | Correct Factor | Measure ment | Limit | Margin | | |
|---|---|---|---|---|---|---|---|---|
| | MHz | dBuV/m | dB | dBuV/m | dBuV/m | dB | Detector | Comment |
| 1 * | 5224.6000 | 41.12 | 41.48 | 82.60 | 54.00 | 28.60 | AVG | No Limit |
| 2 | 5232.4000 | 51.01 | 41.52 | 92.53 | 68.30 | 24.23 | Peak | No Limit |

| | |
|---|---|
| Orthogonal Axis: | X |
| Test Mode: | UNII-1/ TX AC40 Mode 5230MHz |


**Vertical**

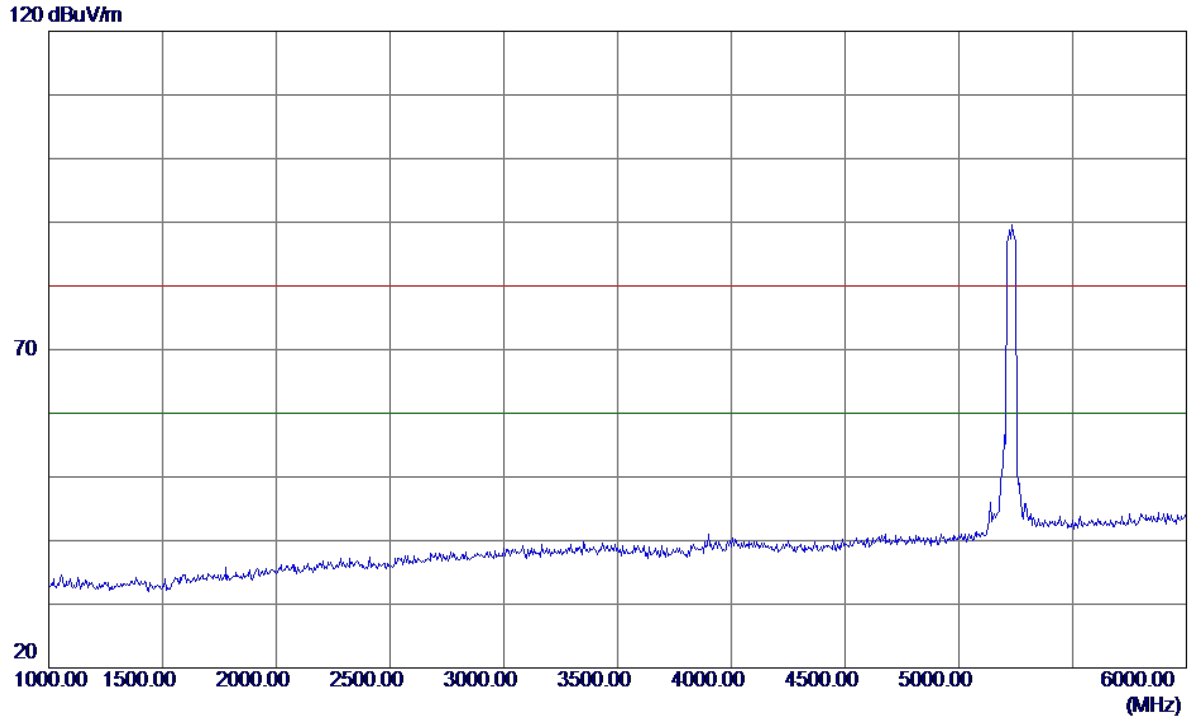


| No. | Freq. | Reading Level | Correct Factor | Measure ment | Limit | Margin | | |
|---|---|---|---|---|---|---|---|---|
| | MHz | dBuV/m | dB | dBuV/m | dBuV/m | dB | Detector | Comment |

| | |
|---|---|
| Orthogonal Axis: | X |
| Test Mode: | UNII-1/ TX AC40 Mode 5230MHz |


**Vertical**

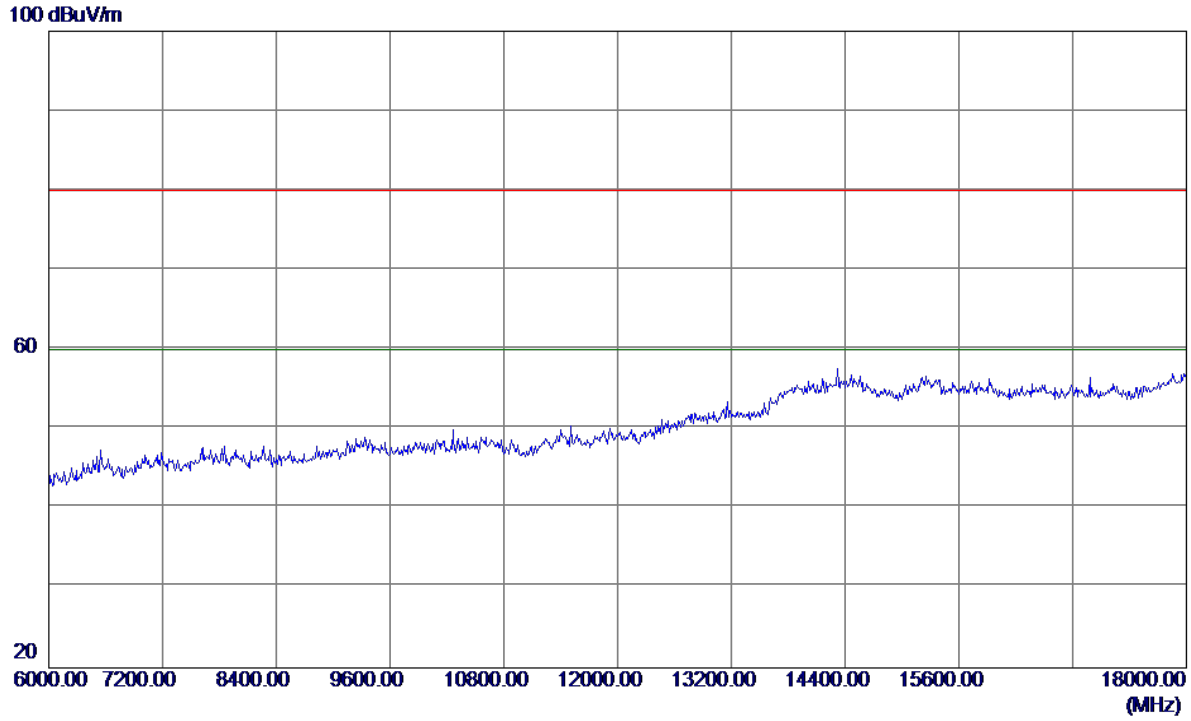


| No. | Freq. | Reading Level | Correct Factor | Measure ment | Limit | Margin | | |
|---|---|---|---|---|---|---|---|---|
| | MHz | dBuV/m | dB | dBuV/m | dBuV/m | dB | Detector | Comment |

| | |
|---|---|
| Orthogonal Axis: | X |
| Test Mode: | UNII-1/ TX AC40 Mode 5230MHz |


**Vertical**

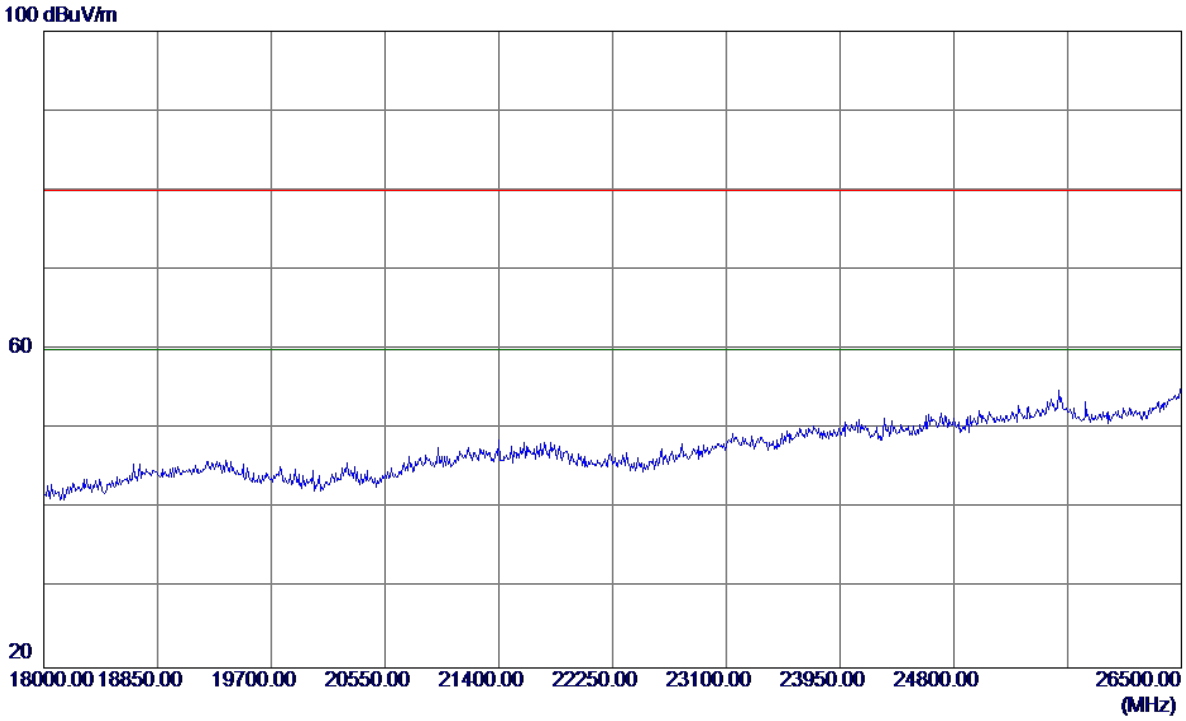


| No. | Freq. | Reading Level | Correct Factor | Measure ment | Limit | Margin | | |
|---|---|---|---|---|---|---|---|---|
| | MHz | dBuV/m | dB | dBuV/m | dBuV/m | dB | Detector | Comment |

| | |
|---|---|
| Orthogonal Axis: | X |
| Test Mode: | UNII-1/ TX AC40 Mode 5230MHz |


**Vertical**

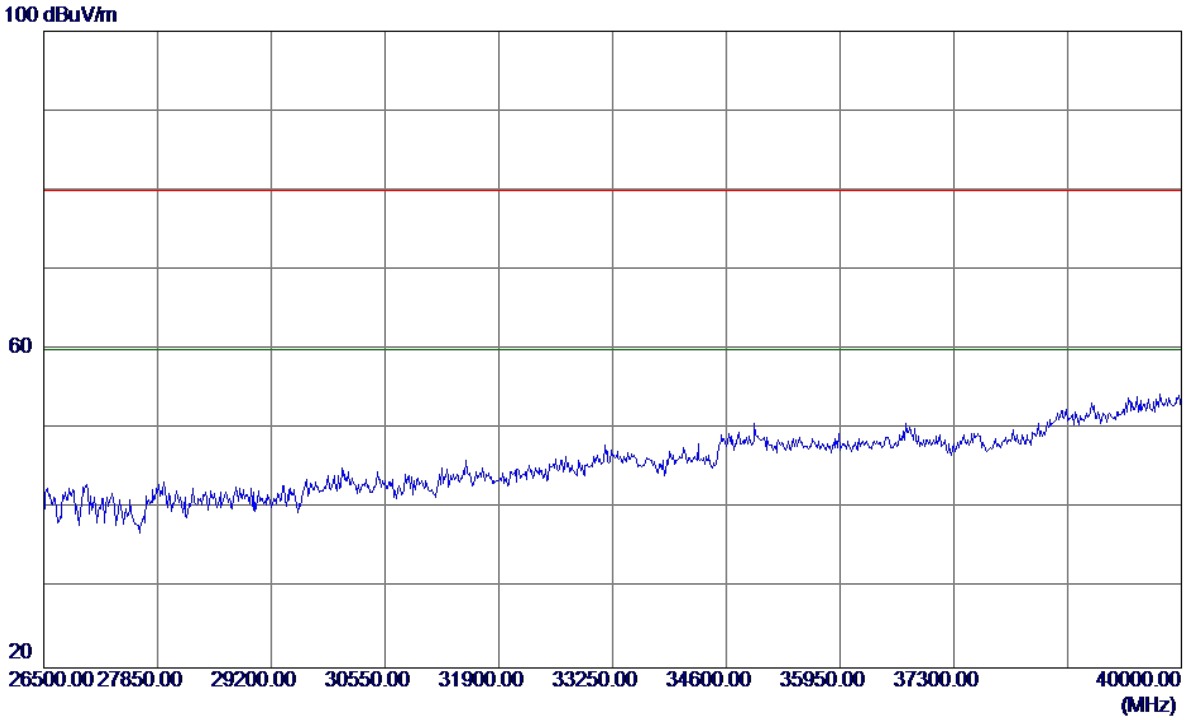


| No. | Freq. | Reading Level | Correct Factor | Measure ment | Limit | Margin | | |
|---|---|---|---|---|---|---|---|---|
| | MHz | dBuV/m | dB | dBuV/m | dBuV/m | dB | Detector | Comment |

| | |
|---|---|
| Orthogonal Axis: | X |
| Test Mode: | UNII-1/ TX AC40 Mode 5230MHz |


**Horizontal**

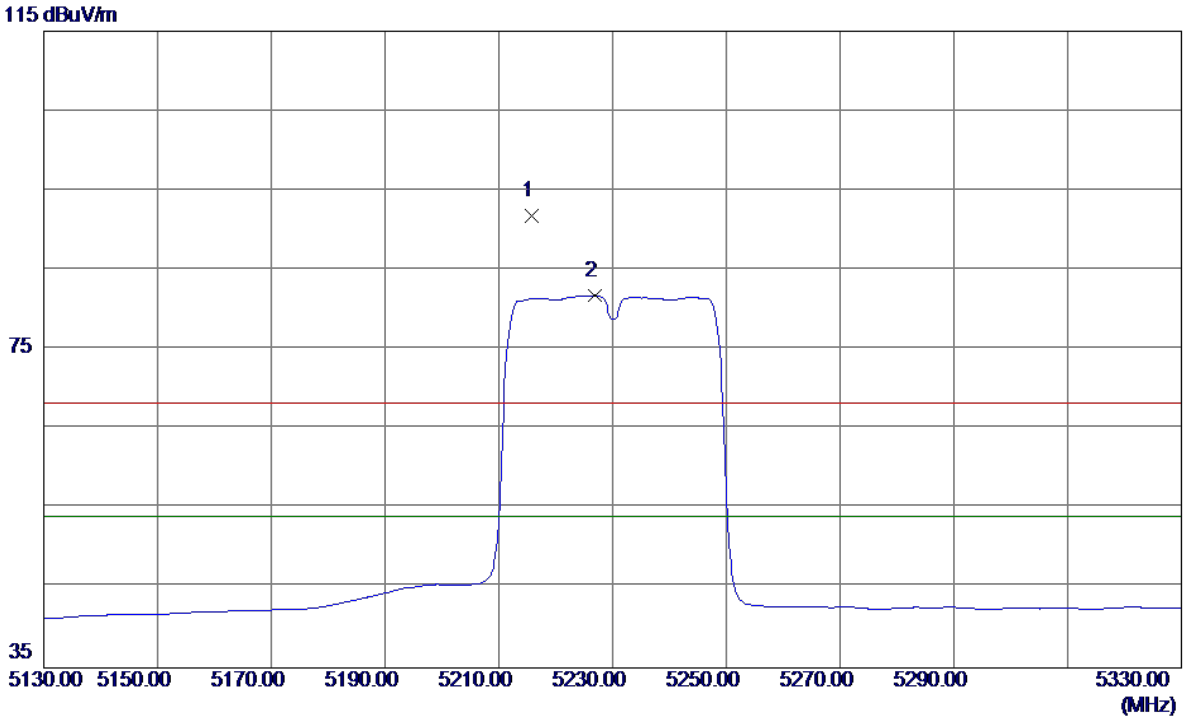


| No. | Freq. | Reading Level | Correct Factor | Measure ment | Limit | Margin | | |
|---|---|---|---|---|---|---|---|---|
| | MHz | dBuV/m | dB | dBuV/m | dBuV/m | dB | Detector | Comment |
| 1 | 5215.8000 | 50.37 | 41.44 | 91.81 | 68.30 | 23.51 | Peak | No Limit |
| 2 * | 5226.8000 | 40.31 | 41.49 | 81.80 | 54.00 | 27.80 | AVG | No Limit |

| | |
|---|---|
| Orthogonal Axis: | X |
| Test Mode: | UNII-1/ TX AC40 Mode 5230MHz |


**Horizontal**

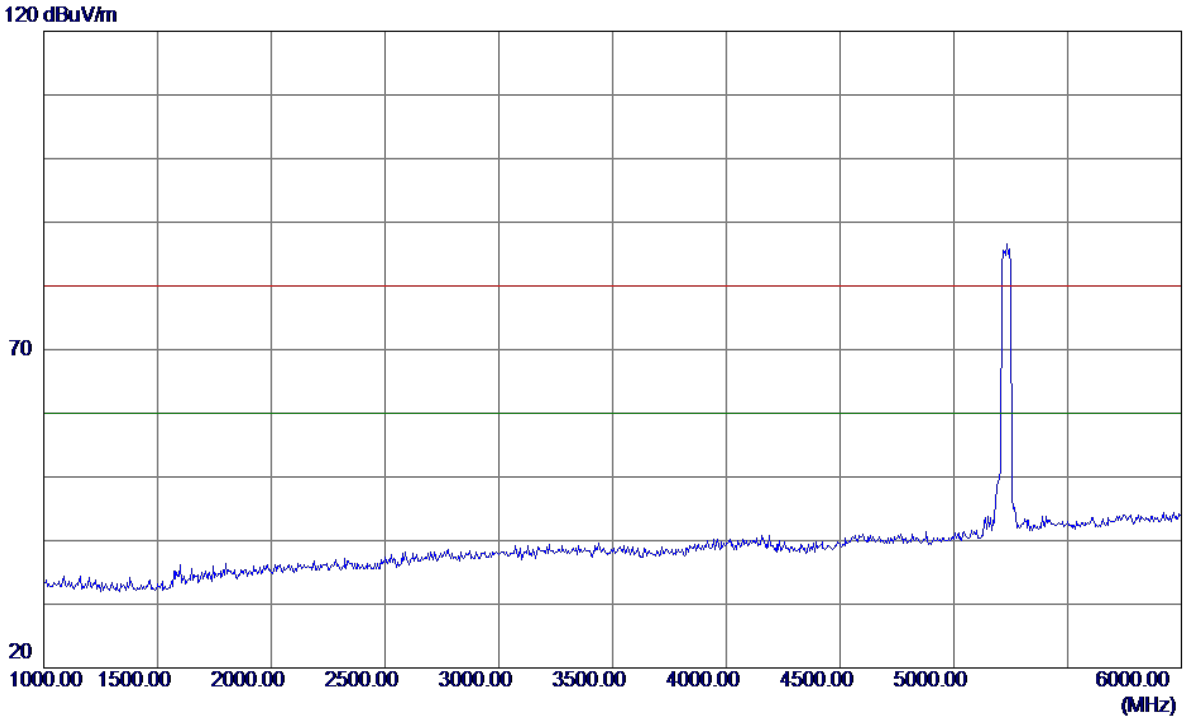


| No. | Freq. | Reading Level | Correct Factor | Measure ment | Limit | Margin | | |
|---|---|---|---|---|---|---|---|---|
| | MHz | dBuV/m | dB | dBuV/m | dBuV/m | dB | Detector | Comment |

| | |
|---|---|
| Orthogonal Axis: | X |
| Test Mode: | UNII-1/ TX AC40 Mode 5230MHz |


**Horizontal**

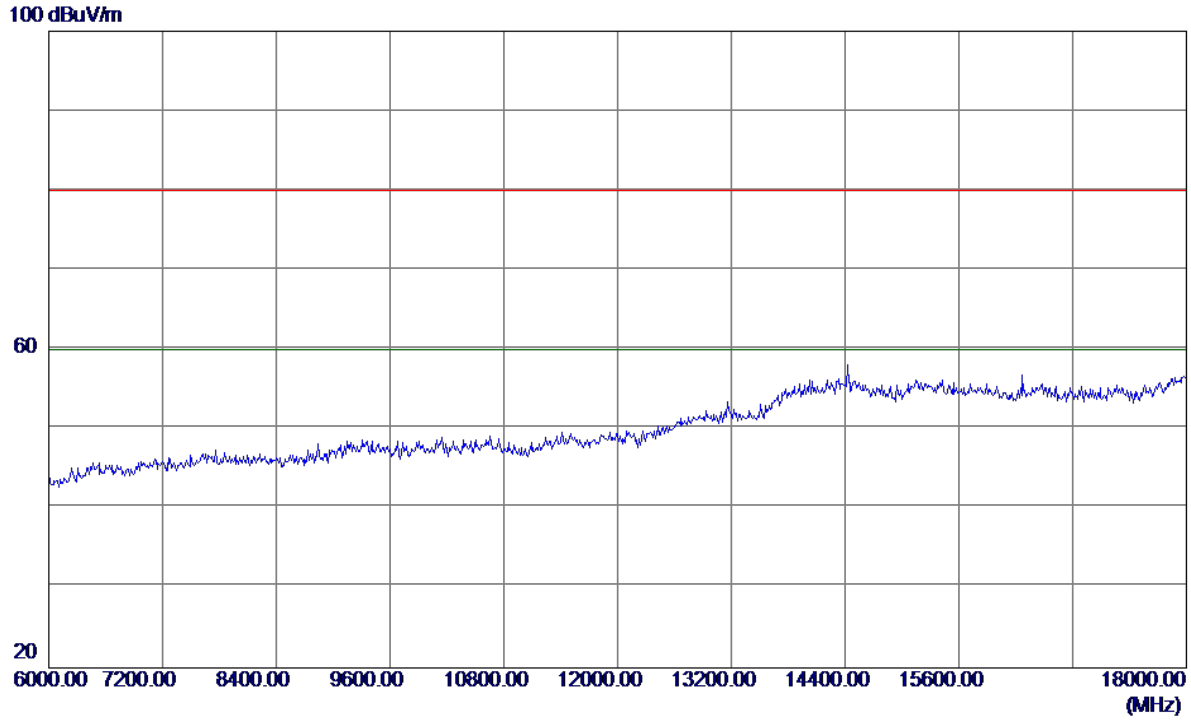


| No. | Freq. | Reading Level | Correct Factor | Measure ment | Limit | Margin | | |
|---|---|---|---|---|---|---|---|---|
| | MHz | dBuV/m | dB | dBuV/m | dBuV/m | dB | Detector | Comment |

| | |
|---|---|
| Orthogonal Axis: | X |
| Test Mode: | UNII-1/ TX AC40 Mode 5230MHz |


**Horizontal**

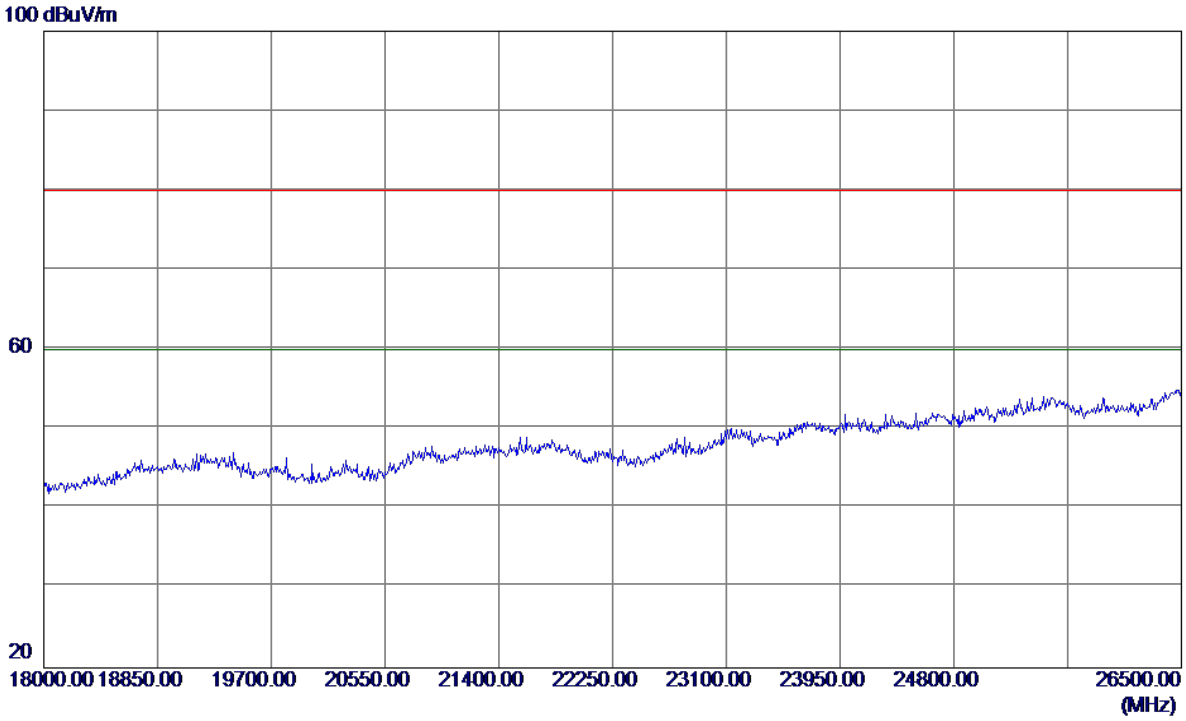


| No. | Freq. | Reading Level | Correct Factor | Measure ment | Limit | Margin | | |
|---|---|---|---|---|---|---|---|---|
| | MHz | dBuV/m | dB | dBuV/m | dBuV/m | dB | Detector | Comment |

| | |
|---|---|
| Orthogonal Axis: | X |
| Test Mode: | UNII-1/ TX AC40 Mode 5230MHz |

**Horizontal**

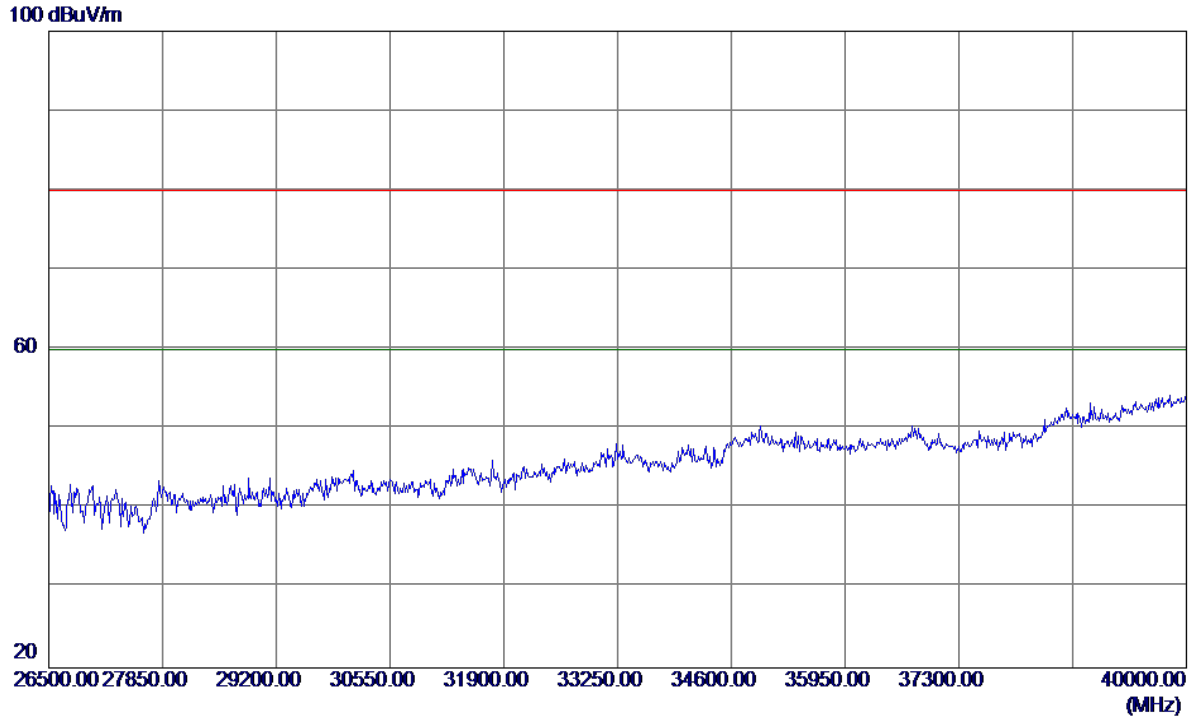


| No. | Freq. | Reading Level | Correct Factor | Measure ment | Limit | Margin | | |
|---|---|---|---|---|---|---|---|---|
| | MHz | dBuV/m | dB | dBuV/m | dBuV/m | dB | Detector | Comment |