



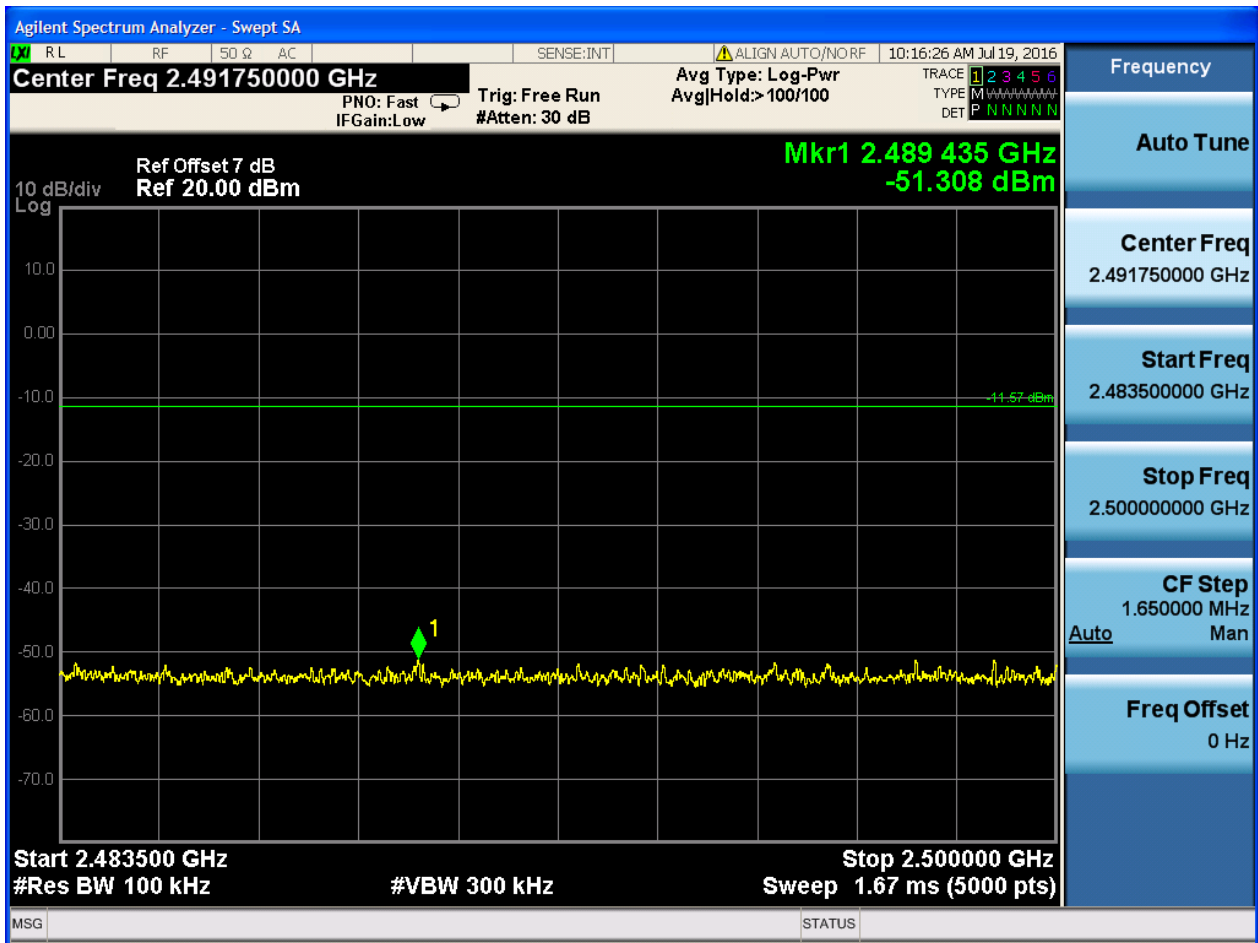

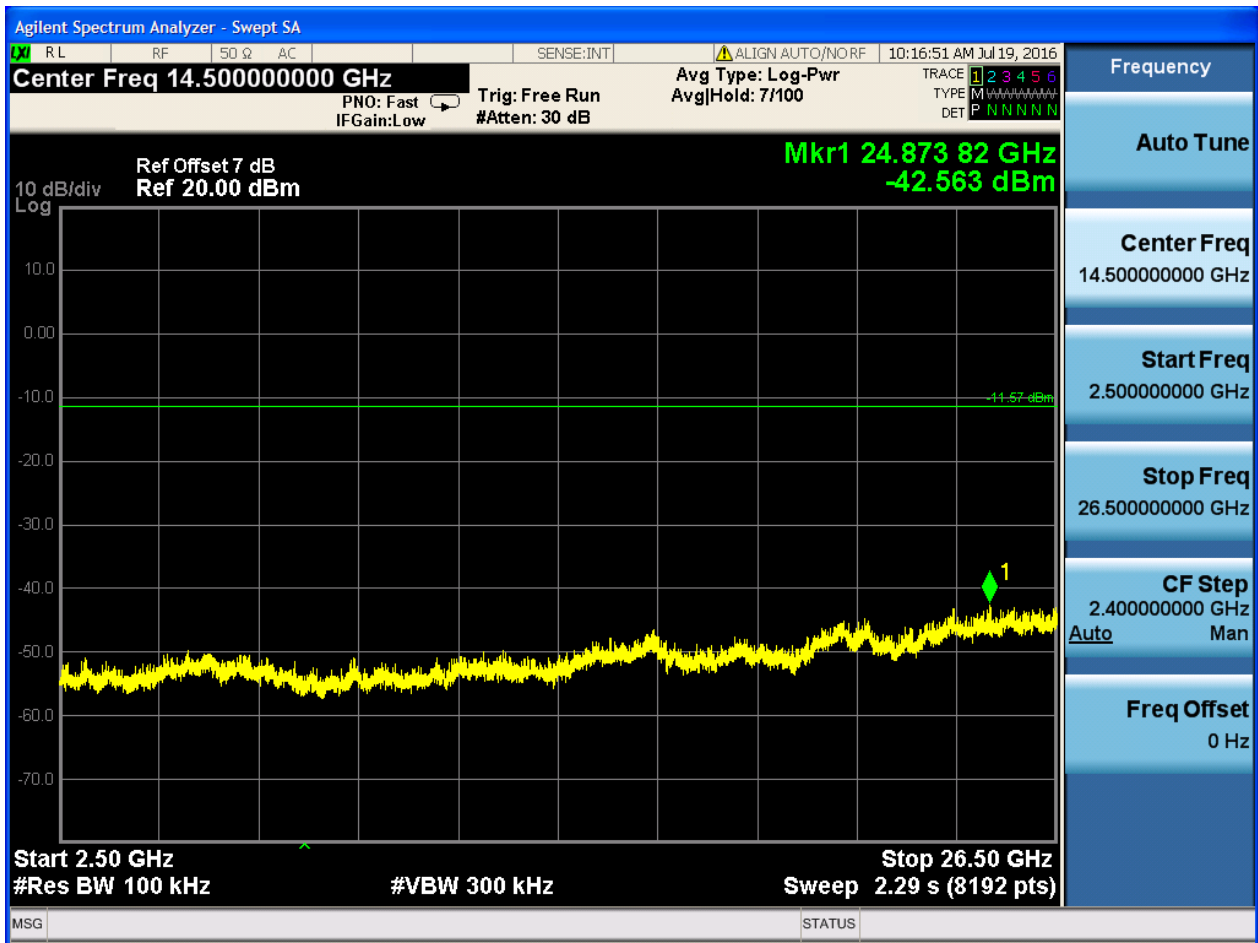

Appendix H: Radiated Emissions in the Restricted Bands

3 Result Table

The whole testing range is from “30 MHz to 26.5 GHz (10th harmonics)” is divided into 4 parts according to the test site settings, which are:

- (Part 1): Test range of “9 KHz to 30 MHz”,
- (Part 2): Test range of “30 GHz to 1 GHz”,
- (Part 3): Test range of “1 GHz to 3 GHz”.
- (Part 4): Test range of “3 GHz to 18 GHz”,
- (Part 5): Test range of “18 GHz to 26.5 GHz”.

In this Appendix, only the test results and plots under the worst case can be reported. In the result table, the “< Limit” denotes that “Not found obvious spikes or see marked spikes on plots and listed emissions records”.

Test Range	EUT Conf.	Emissions	Verdict
30 MHz to 1 GHz	TM1_DH5_Ch0 (Worst Conf.)	< Limit	Pass
1 GHz to 3 GHz	TM1_DH5_Ch0 (Worst Conf.)	< Limit	Pass
	TM1_DH5_Ch78 (Worst Conf.)	< Limit	Pass
3 GHz to 18 GHz	TM1_DH5_Ch0 (Worse Conf.)	< Limit	Pass
18 GHz to 26.5 GHz	TM1_DH5_Ch0 (Worst Conf.)	< Limit	Pass

Note: We tested all modes, but the data presented below is the worst case.

4 Result Plot


Part 1: Testing Range of “9 kHz to 30MHz”

NOTE1: No peak found in the Test Range of “9 kHz to 30MHz”

Part 2: Testing Range of “30 MHz to 1 GHz”

Note 1: The test results and plot for testing range of “30 MHz to 1 GHz” showed as below is the WORST case for all Test Modes and Channels. This range will not be presented for each Test Mode and each Channel.

Note 2: The emissions in this range are mainly from the Platform Device (Notepad PC and its ancillary components).

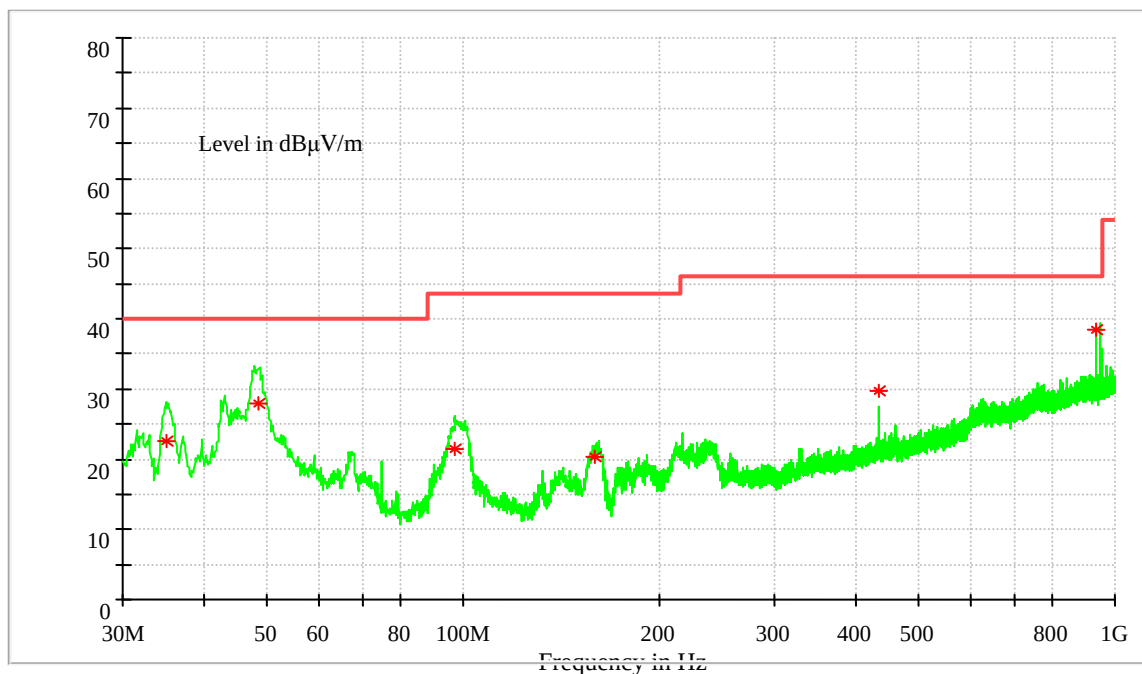

Frequency (MHz)	Level (dBμ V/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Trans d. (dB)
35.05015	22.65	40	17.35	136	V	200	15.2
48.4491	27.92	40	12.08	107	V	273	15.2
97.13985	21.53	43.5	21.97	124	V	165	13.5
159.5356	20.25	43.5	23.25	123	V	258	10.5
435.14815	29.72	46	16.28	100	H	103	18.9
938.75765	38.38	46	7.62	192	V	146	26.2

Note:

1, Level =Reading level by receiver + Transd (Antenna factor + cable loss – preamplifier gain)


The reading level is calculated by software which is not shown in the sheet.

2, Margin=Limit - Level

Part 3: Testing Range of “1GHz to 3GHz”

- Note 1: The testing range of “1 GHz to 3 GHz” is for checking radiated emissions located in restricted bands near the EUT operating bands.
- Note 2: Two limits are required in the testing range above 1 GHz, that is Peak limit (74 dB μ V/m) and Average Limit (54 dB μ V/m).
- Note 3: The peak spike exceeds the limit line is EUT’s operating frequency.

Channel 0

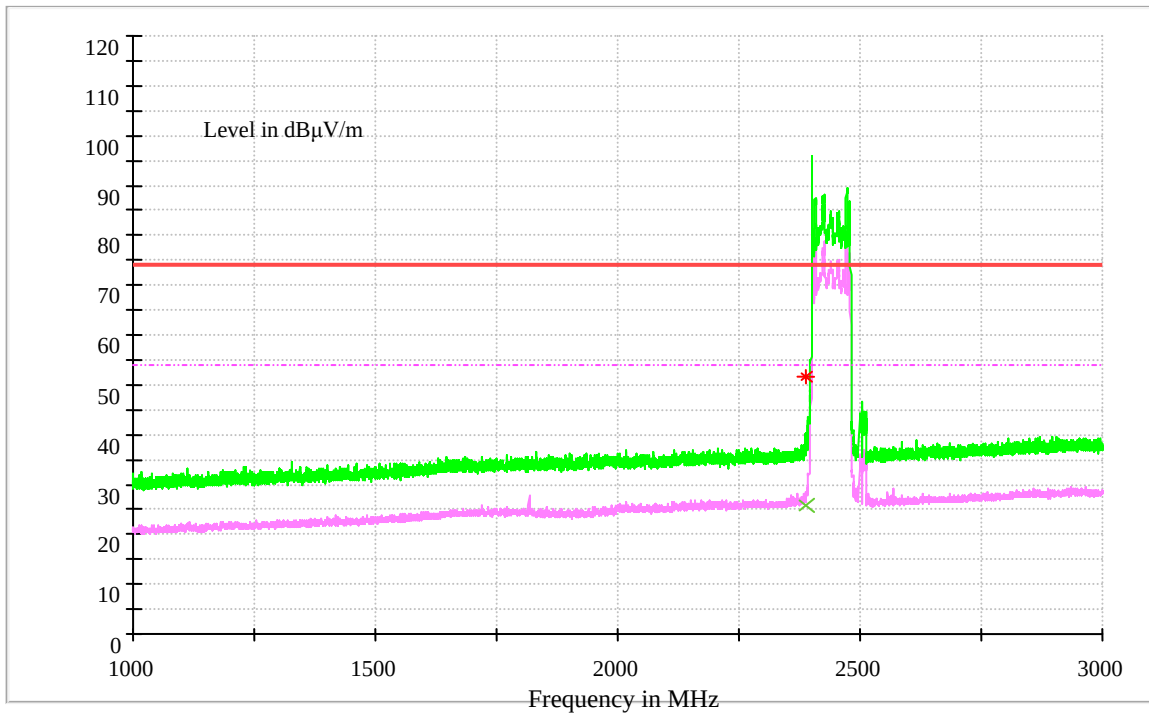

MEASUREMENT RESULT: AV Detector

Frequency (MHz)	Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Height (cm)	Pol	Azimuth h	Transd. (dB)
2390	25.65	54	28.35	182	H	57	-2.1

MEASUREMENT RESULT: PK Detector

Frequency (MHz)	Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Height (cm)	Pol	Azimuth h (deg)	Transd. (dB)
2390	52.11	74	21.89	127	H	24	-2.1


Note2:

1, Level =Reading level by receiver + Transd (Antenna factor + cable loss – preamplifier gain)

The reading level is calculated by software which is not shown in the sheet.

2, Margin=Limit - Level

Channel 78

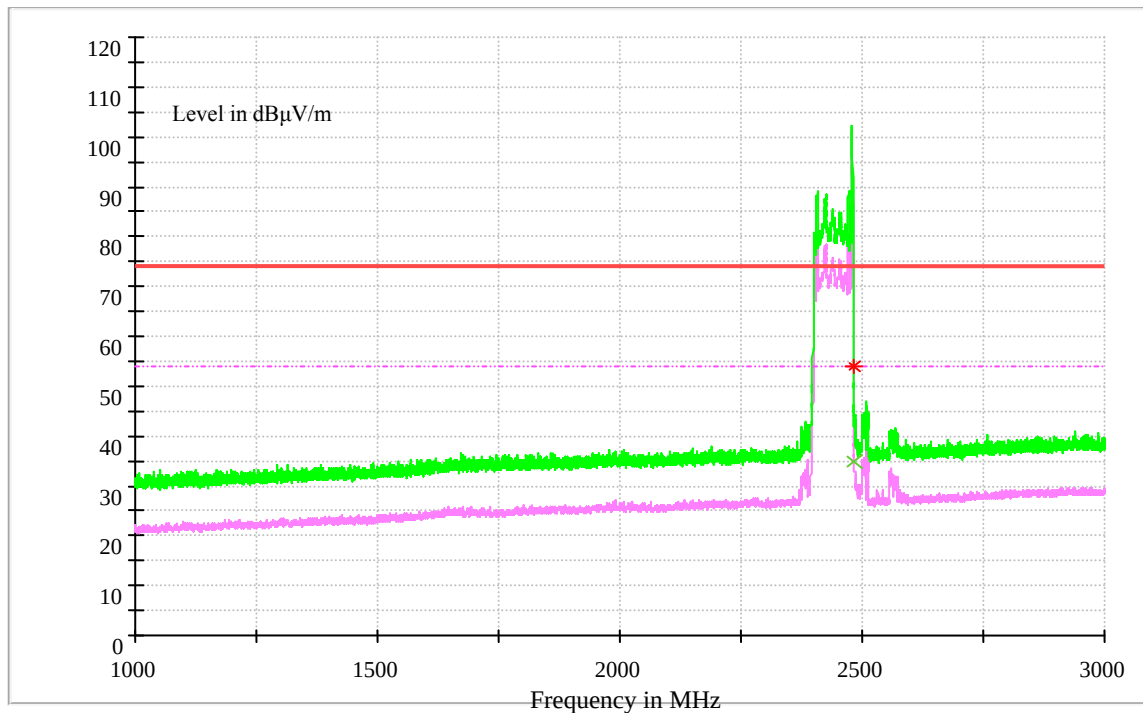

MEASUREMENT RESULT: AV Detector

Frequency (MHz)	Level (dBμ V/m)	Limit (dBμ V/m)	Margin (dB)	Height (cm)	Pol	Azimuth h	Transd. (dB)
2483.5	34.67	54	19.33	168	H	67	7.2

MEASUREMENT RESULT: PK Detector

Frequency (MHz)	Level (dBμ V/m)	Limit (dBμ V/m)	Margin (dB)	Height (cm)	Pol	Azimuth h (deg)	Transd. (dB)
2483.5	53.5	74	20.5	191	H	127	7.2

Note2:

1, Level =Reading level by receiver + Transd (Antenna factor + cable loss – preamplifier gain)


The reading level is calculated by software which is not shown in the sheet.

2, Margin=Limit - Level

Part 4: Testing Range of “3 GHz to 18 GHz”

- Note 1: The test results and plot for testing range of “3 GHz to 18 GHz” showed as below is the WORST case for all Test Modes and Channels. This range will not be presented for each Test Mode and each Channel.
- Note 2: The testing range of “3 GHz to 18 GHz” is for checking radiated emissions located in restricted bands faraway from the EUT operating bands.
- Note 3: Two limits are required in the testing range above 1 GHz, that is Peak limit (74 dB μ V/m) and Average Limit (54 dB μ V/m).

Full Spectrum

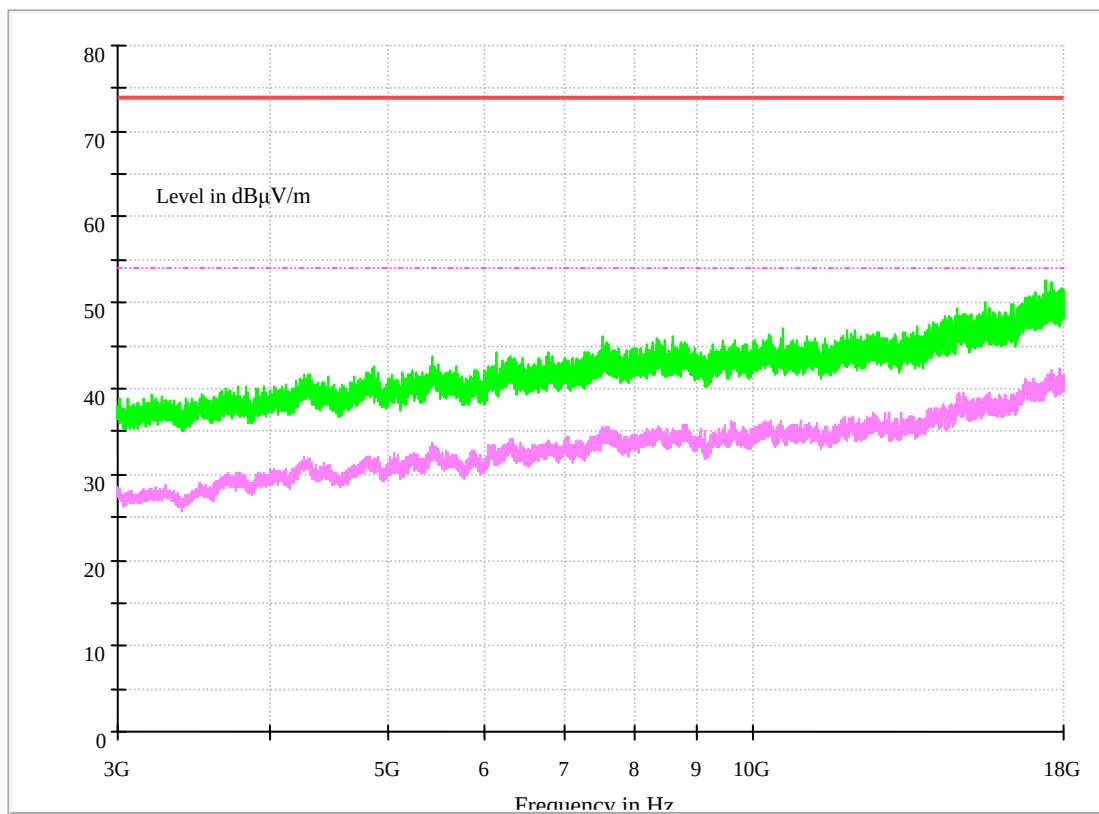



Part 5: Testing Range of “18 GHz to 26.5 GHz”

NOTE1: No peak found in the Test Range of “18 GHz to 26.5GHz”

Appendix I: Receiver Spurious Emissions




1 Result Table

In this Appendix, only the test results and plots under the worst case can be reported.

EUT Conf.	Maximum Emissions	Verdict
TM1_DH5_Ch39	Not found obvious spikes or see marked spikes on plots and listed emissions records.	Pass

2 Result Plot

Channel 39

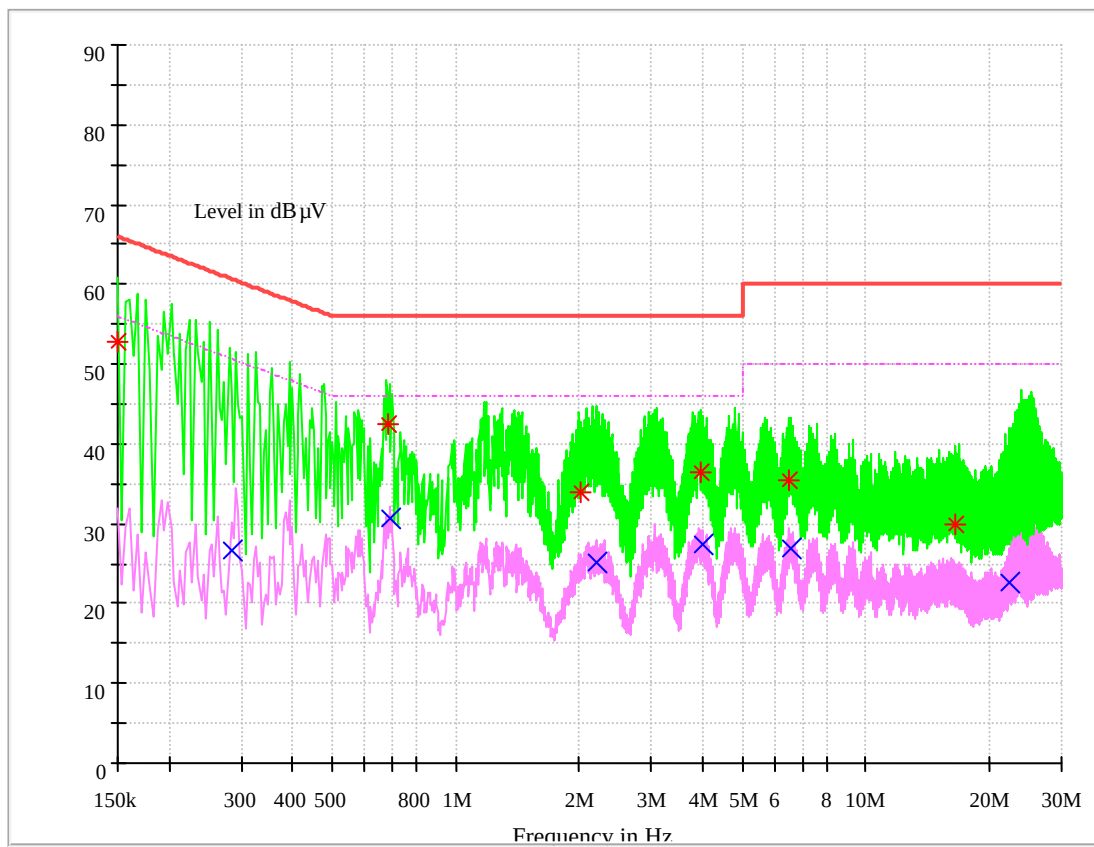

MEASUREMENT RESULT: AV Detector

Frequency (MHz)	Level (dBμ V)	Limit (dBμ V)	Transd. (dB)	Margin (dB)	Line	PE
0.28557	26.7	50.65	9.7	23.95	L1	FLO
0.69109	30.72	46	9.7	15.28	N	FLO
2.2124	25.19	46	9.7	20.81	N	FLO
3.99905	27.49	46	9.8	18.51	N	FLO
6.54589	26.79	50	9.9	23.21	N	FLO
22.2896	22.63	50	10.2	27.37	L1	FLO

MEASUREMENT RESULT: PK Detector

Frequency (MHz)	Level (dBμ V)	Limit (dBμ V)	Transd. (dB)	Margin (dB)	Line	PE
0.15055	52.79	65.97	9.7	13.18	L1	FLO
0.68667	42.6	56	9.7	13.4	N	FLO
3.9548	36.34	56	9.8	19.66	N	FLO
6.49637	35.36	60	9.9	24.64	N	FLO
2.01981	33.92	56	9.7	22.08	N	FLO
16.5032	30.01	60	10.1	29.99	N	FLO

Note2:

1, Level =Reading level by receiver + Transd (Antenna factor + cable loss – preamplifier gain)

The reading level is calculated by software which is not shown in the sheet.

2, Margin=Limit - Level

END