



Appendix B DASY5 measurement results

Table of contents
GSM835 Head
GSM835 Body
GSM1900 Head
GSM1900 Body
UMTS Band V Head
UMTS Band V Body
LTE Band V Head
LTE Band V Body
LTE Band VII Head
LTE Band VII Body
WiFi 2.4G Head
WiFi 2.4G Body

Test Laboratory: HUAWEI SAR/HAC Lab

Che2-L12 GSM850 251CH Right hand touch cheek

DUT: Che2-L12; Type: Smart Phone; Serial: SAR1

Communication System: UID 0, HW-GSM/GPRS/EGPRS-ITS (0); Frequency: 848.8 MHz; Duty Cycle: 1:8.30042

Medium parameters used: $f = 849$ MHz; $\sigma = 0.883$ S/m; $\epsilon_r = 41.129$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY Configuration:

- Probe: EX3DV4 - SN3744; ConvF(9.09, 9.09, 9.09); Calibrated: 2014-7-24;
- Sensor-Surface: 3mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE4 Sn851; Calibrated: 2014-7-24
- Phantom: SAM1; Type: SAM; Serial: TP-1475
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Head/Area Scan (9x14x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 0.287 W/kg


Configuration/Head/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 7.767 V/m; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 0.337 W/kg

SAR(1 g) = 0.267 W/kg; SAR(10 g) = 0.202 W/kg

Maximum value of SAR (measured) = 0.289 W/kg

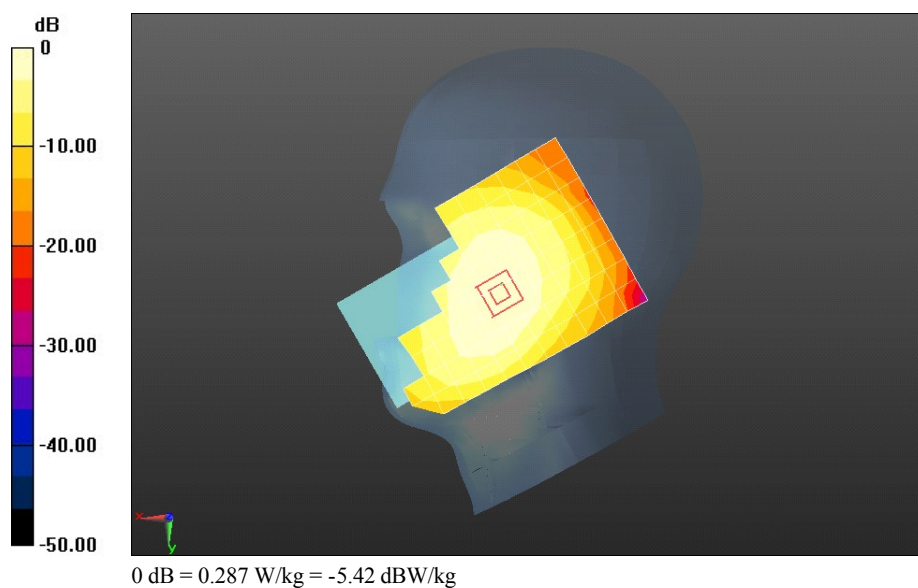

Test Laboratory: HUAWEI SAR/HAC Lab

Che2-L12 GSM850 251CH Right hand touch cheek with battery 2#

DUT: Che2-L12; Type: Smart Phone; Serial: SAR1

Communication System: UID 0, HW-GSM\GPRS\EGPRS-1TS (0); Frequency: 848.8 MHz; Duty Cycle: 1:8.30042

Medium parameters used: $f = 849$ MHz; $\sigma = 0.883$ S/m; $\epsilon_r = 41.129$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY Configuration:

- Probe: EX3DV4 - SN3744; ConvF(9.09, 9.09, 9.09); Calibrated: 2014-7-24;
- Sensor-Surface: 3mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE4 Sn851; Calibrated: 2014-7-24
- Phantom: SAM1; Type: SAM; Serial: TP-1475
- DASY52 52.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Head/Area Scan (9x14x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 0.289 W/kg


Configuration/Head/Zoom Scan (6x6x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 7.754 V/m; Power Drift = 0.00 dB

Peak SAR (extrapolated) = 0.341 W/kg

SAR(1 g) = 0.269 W/kg; SAR(10 g) = 0.203 W/kg

Maximum value of SAR (measured) = 0.295 W/kg

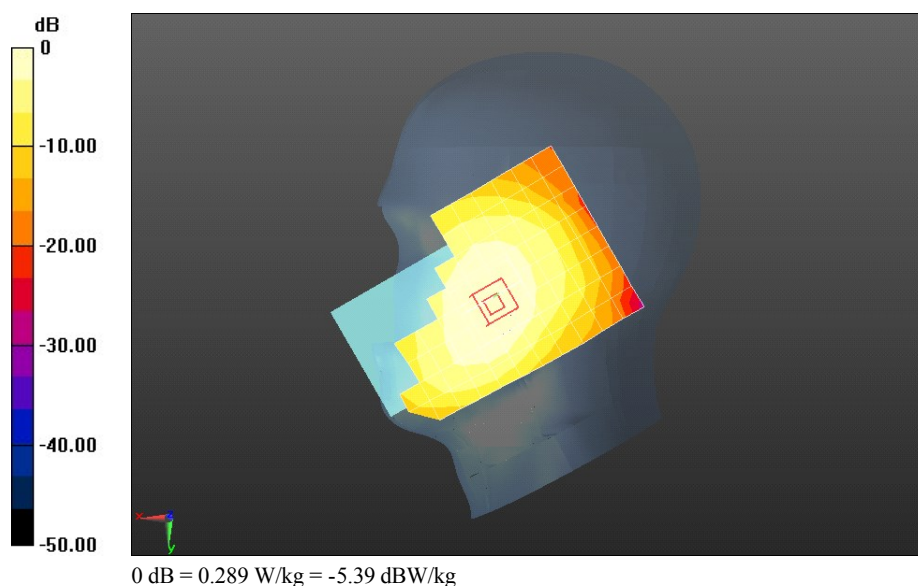

Test Laboratory: HUAWEI SAR/HAC Lab

Che2-L12 GSM850 190CH Back side 15mm

DUT: Che2-L12; Type: Smart Phone; Serial: SAR1

Communication System: UID 0, HW-GSM\GPRS\EGPRS-1TS (0); Frequency: 836.6 MHz; Duty Cycle: 1:8.30042

Medium parameters used: $f = 837$ MHz; $\sigma = 0.953$ S/m; $\epsilon_r = 55.283$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3744; ConvF(9.06, 9.06, 9.06); Calibrated: 2014-7-24;
- Sensor-Surface: 3mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE4 Sn851; Calibrated: 2014-7-24
- Phantom: SAM1; Type: SAM; Serial: TP-1475
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Body/Area Scan (7x12x1): Measurement grid: $dx=15$ mm, $dy=15$ mm


Maximum value of SAR (measured) = 0.383 W/kg

Configuration/Body/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 19.67 V/m; Power Drift = 0.00 dB

Peak SAR (extrapolated) = 0.438 W/kg

SAR(1 g) = 0.352 W/kg; SAR(10 g) = 0.272 W/kg

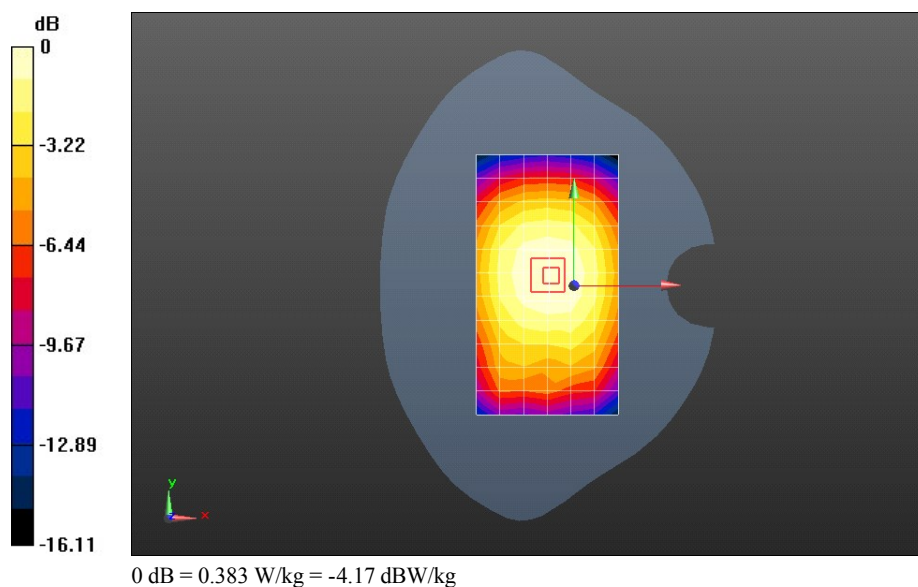

Test Laboratory: HUAWEI SAR/HAC Lab

Che2-L12 GSM850 190CH Back side 15mm with battery 2#

DUT: Che2-L12; Type: Smart Phone; Serial: SAR1

Communication System: UID 0, HW-GSM\GPRS\EGPRS-1TS (0); Frequency: 836.6 MHz; Duty Cycle: 1:8.30042

Medium parameters used: $f = 837$ MHz; $\sigma = 0.953$ S/m; $\epsilon_r = 55.283$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3744; ConvF(9.06, 9.06, 9.06); Calibrated: 2014-7-24;
- Sensor-Surface: 3mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE4 Sn851; Calibrated: 2014-7-24
- Phantom: SAM1; Type: SAM; Serial: TP-1475
- DASY52 52.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Body/Area Scan (7x12x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 0.410 W/kg


Configuration/Body/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 20.27 V/m; Power Drift = 0.00 dB

Peak SAR (extrapolated) = 0.467 W/kg

SAR(1 g) = 0.370 W/kg; SAR(10 g) = 0.285 W/kg

Maximum value of SAR (measured) = 0.405 W/kg

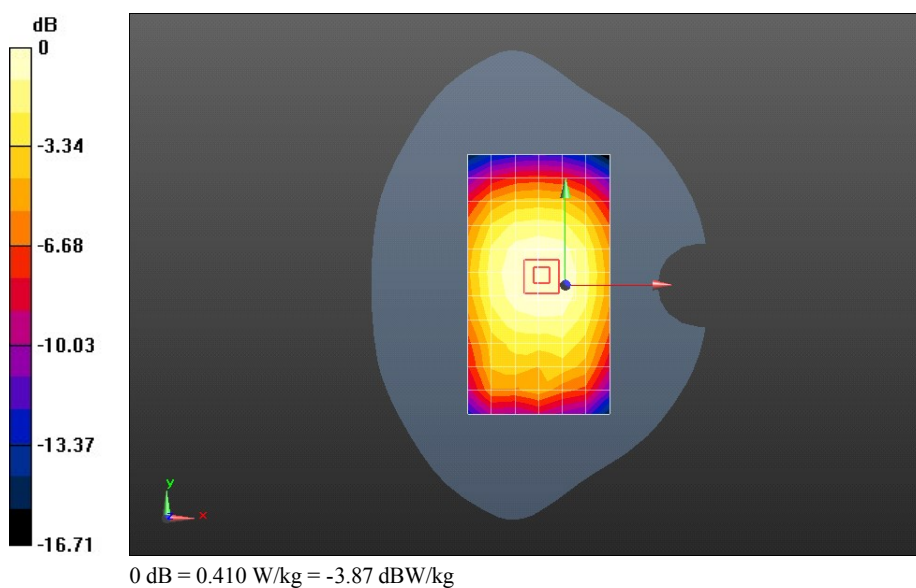

Test Laboratory: HUAWEI SAR/HAC Lab

Che2-L12 GSM850 GPRS 2TS 190CH Back side 10mm

DUT: Che2-L12; Type: Smart Phone; Serial: SAR1

Communication System: UID 0, HW-GSM\GPRS\EGPRS-2TS (0); Frequency: 836.6 MHz; Duty Cycle: 1:4.10015

Medium parameters used: $f = 837$ MHz; $\sigma = 0.953$ S/m; $\epsilon_r = 55.283$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3744; ConvF(9.06, 9.06, 9.06); Calibrated: 2014-7-24;
- Sensor-Surface: 3mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE4 Sn851; Calibrated: 2014-7-24
- Phantom: SAM1; Type: SAM; Serial: TP-1475
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Body/Area Scan (7x12x1): Measurement grid: $dx=15$ mm, $dy=15$ mm


Maximum value of SAR (measured) = 0.555 W/kg

Configuration/Body/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 23.85 V/m; Power Drift = -0.03 dB

Peak SAR (extrapolated) = 0.636 W/kg

SAR(1 g) = 0.507 W/kg; SAR(10 g) = 0.392 W/kg

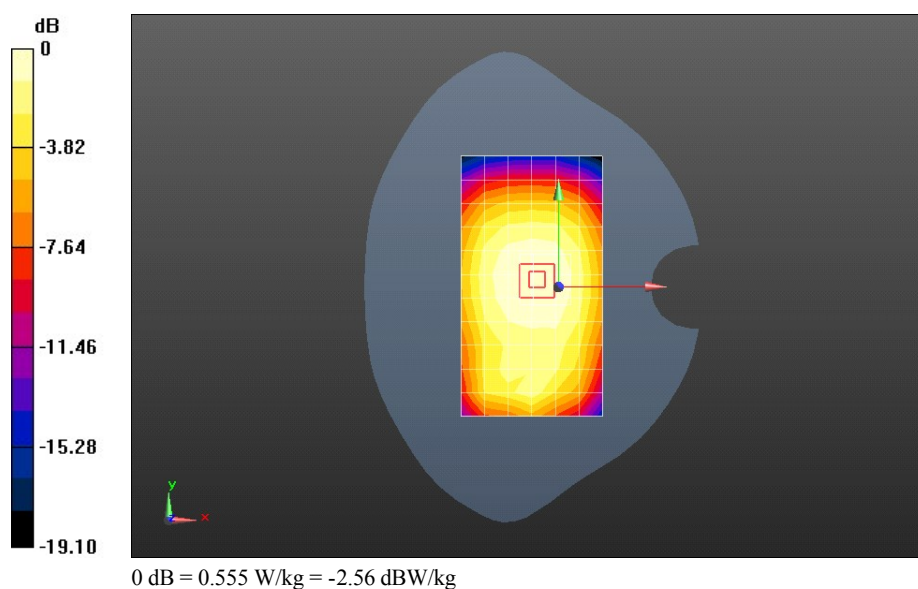

Test Laboratory: HUAWEI SAR/HAC Lab

Che2-L12 GSM850 GPRS 2TS 190CH Back side 10mm with battery 2#

DUT: Che2-L12; Type: Smart Phone; Serial: SAR1

Communication System: UID 0, HW-GSM\GPRS\EGPRS-2TS (0); Frequency: 836.6 MHz; Duty Cycle: 1:4.10015

Medium parameters used: $f = 837$ MHz; $\sigma = 0.953$ S/m; $\epsilon_r = 55.283$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3744; ConvF(9.06, 9.06, 9.06); Calibrated: 2014-7-24;
- Sensor-Surface: 3mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE4 Sn851; Calibrated: 2014-7-24
- Phantom: SAM1; Type: SAM; Serial: TP-1475
- DASY52 52.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Body/Area Scan (7x12x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 0.548 W/kg


Configuration/Body/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 23.47 V/m; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 0.628 W/kg

SAR(1 g) = 0.501 W/kg; SAR(10 g) = 0.387 W/kg

Maximum value of SAR (measured) = 0.546 W/kg

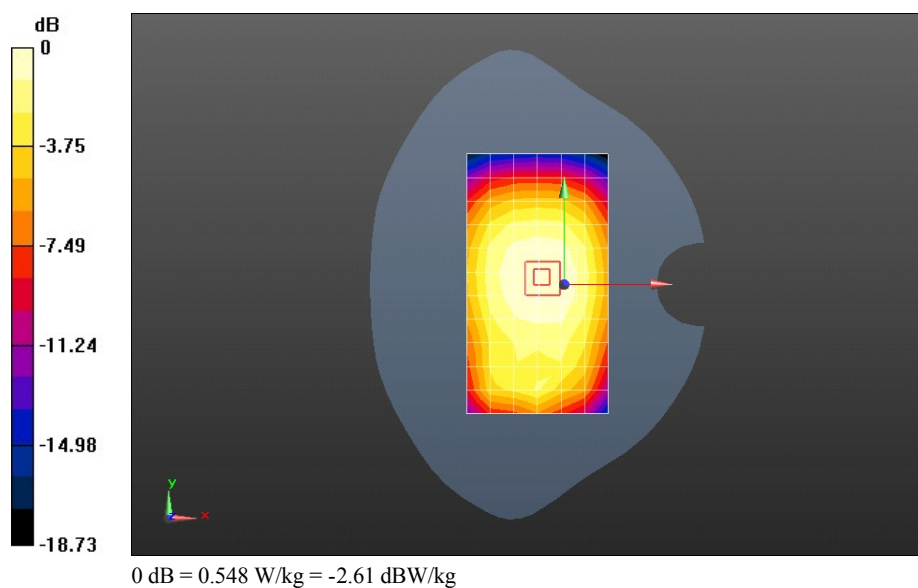

Test Laboratory: HUAWEI SAR/HAC Lab

Che2-L12 GSM1900 810CH Right hand touch cheek

DUT: Che2-L12; Type: Smart Phone; Serial: SAR1

Communication System: UID 0, HW-GSM\GPRS\EGPRS-1TS (0); Frequency: 1909.8 MHz; Duty Cycle: 1:8.30042

Medium parameters used: $f = 1910$ MHz; $\sigma = 1.42$ S/m; $\epsilon_r = 38.218$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY Configuration:

- Probe: EX3DV4 - SN3744; ConvF(7.6, 7.6, 7.6); Calibrated: 2014-7-24;
- Sensor-Surface: 3mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE4 Sn851; Calibrated: 2014-7-24
- Phantom: SAM2; Type: SAM; Serial: TP:1474
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Head/Area Scan (9x14x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 0.0536 W/kg


Configuration/Head/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 1.498 V/m; Power Drift = -0.04 dB

Peak SAR (extrapolated) = 0.0720 W/kg

SAR(1 g) = 0.045 W/kg; SAR(10 g) = 0.028 W/kg

Maximum value of SAR (measured) = 0.0539 W/kg

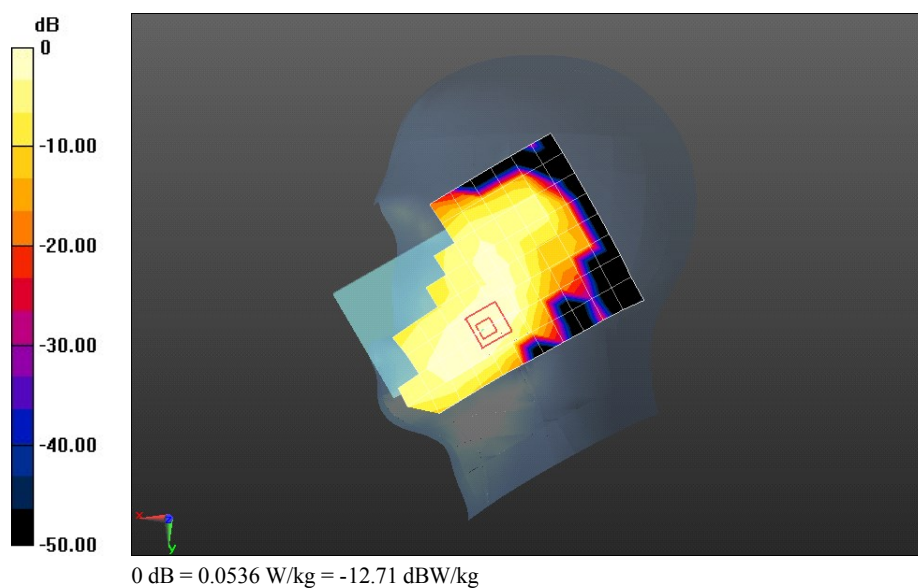

Test Laboratory: HUAWEI SAR/HAC Lab

Che2-L12 GSM1900 810CH Right hand touch cheek with battery 2#

DUT: Che2-L12; Type: Smart Phone; Serial: SAR1

Communication System: UID 0, HW-GSM\GPRS\EGPRS-1TS (0); Frequency: 1909.8 MHz; Duty Cycle: 1:8.30042

Medium parameters used: $f = 1910$ MHz; $\sigma = 1.42$ S/m; $\epsilon_r = 38.218$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY Configuration:

- Probe: EX3DV4 - SN3744; ConvF(7.6, 7.6, 7.6); Calibrated: 2014-7-24;
- Sensor-Surface: 3mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE4 Sn851; Calibrated: 2014-7-24
- Phantom: SAM2; Type: SAM; Serial: TP:1474
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Head/Area Scan (9x14x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 0.0587 W/kg


Configuration/Head/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 1.678 V/m; Power Drift = -0.06 dB

Peak SAR (extrapolated) = 0.0770 W/kg

SAR(1 g) = 0.048 W/kg; SAR(10 g) = 0.029 W/kg

Maximum value of SAR (measured) = 0.0566 W/kg

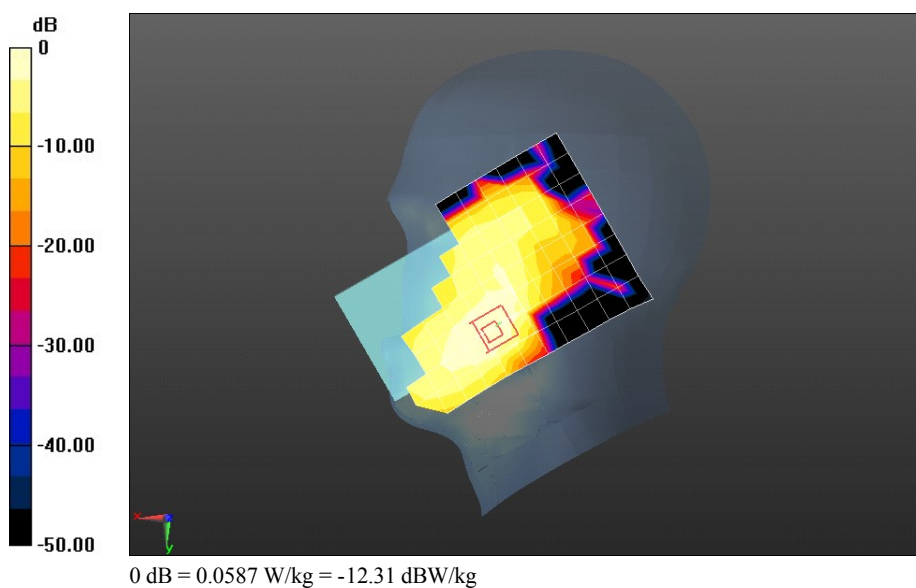

Test Laboratory: HUAWEI SAR/HAC Lab

Che2-L12 GSM1900 661CH Back side 15mm

DUT: Che2-L12; Type: Smart Phone; Serial: SAR1

Communication System: UID 0, HW-GSM\GPRS\EGPRS-ITS (0); Frequency: 1880 MHz; Duty Cycle: 1:8.30042

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.548$ S/m; $\epsilon_r = 51.44$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3744; ConvF(7.17, 7.17, 7.17); Calibrated: 2014-7-24;
- Sensor-Surface: 3mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE4 Sn851; Calibrated: 2014-7-24
- Phantom: SAM2; Type: SAM; Serial: TP:1474
- DASY52 52.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Body/Area Scan (9x14x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 0.403 W/kg


Configuration/Body/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 3.333 V/m; Power Drift = 0.05 dB

Peak SAR (extrapolated) = 0.576 W/kg

SAR(1 g) = 0.349 W/kg; SAR(10 g) = 0.194 W/kg

Maximum value of SAR (measured) = 0.423 W/kg

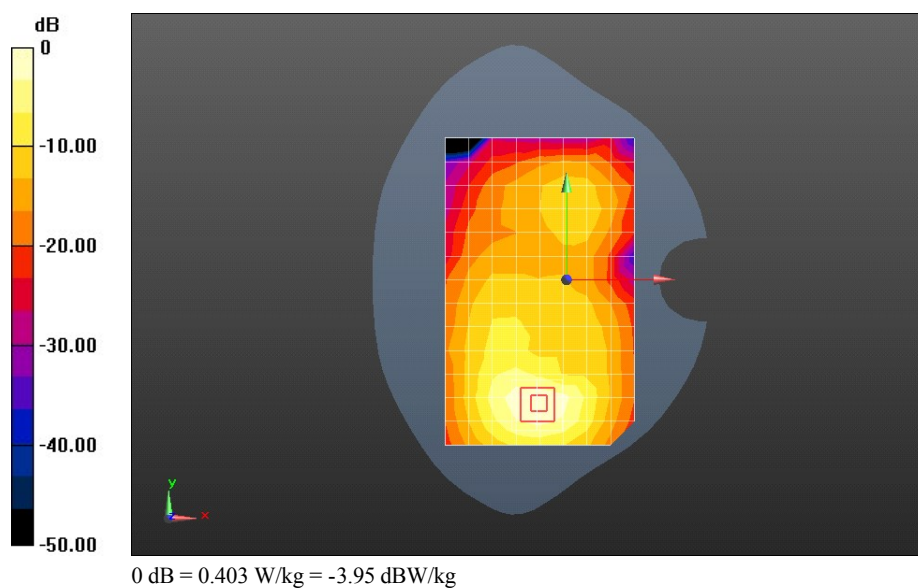

Test Laboratory: HUAWEI SAR/HAC Lab

Che2-L12 GSM1900 661CH Back side 15mm with battery 2#

DUT: Che2-L12; Type: Smart Phone; Serial: SAR1

Communication System: UID 0, HW-GSM\GPRS\EGPRS-ITS (0); Frequency: 1880 MHz; Duty Cycle: 1:8.30042

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.548$ S/m; $\epsilon_r = 51.44$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3744; ConvF(7.17, 7.17, 7.17); Calibrated: 2014-7-24;
- Sensor-Surface: 3mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE4 Sn851; Calibrated: 2014-7-24
- Phantom: SAM2; Type: SAM; Serial: TP:1474
- DASY52 52.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Body/Area Scan (9x14x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 0.387 W/kg


Configuration/Body/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 3.434 V/m; Power Drift = -0.13 dB

Peak SAR (extrapolated) = 0.551 W/kg

SAR(1 g) = 0.333 W/kg; SAR(10 g) = 0.185 W/kg

Maximum value of SAR (measured) = 0.409 W/kg

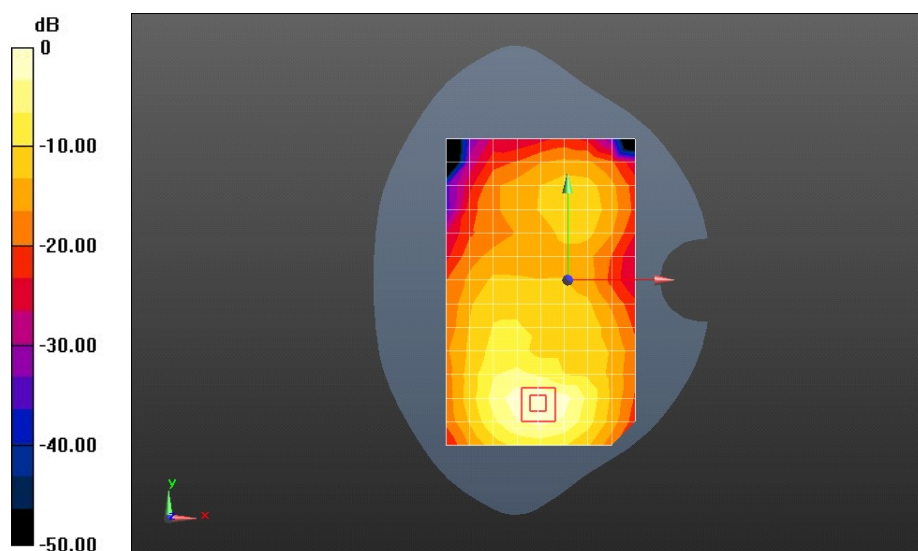

0 dB = 0.387 W/kg = -4.12 dBW/kg

Test Laboratory: HUAWEI SAR/HAC Lab

Che2-L12 GSM1900 GPRS 2TS 661CH Bottom side 10mm

DUT: Che2-L12; Type: Smart Phone; Serial: SAR1

Communication System: UID 0, HW-GSM\GPRS\EGPRS-2TS (0); Frequency: 1880 MHz; Duty Cycle: 1:4.10015

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.548$ S/m; $\epsilon_r = 51.44$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3744; ConvF(7.17, 7.17, 7.17); Calibrated: 2014-7-24;
- Sensor-Surface: 3mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE4 Sn851; Calibrated: 2014-7-24
- Phantom: SAM2; Type: SAM; Serial: TP:1474
- DASY52 52.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Body/Area Scan (5x9x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 0.795 W/kg


Configuration/Body/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 21.82 V/m; Power Drift = 0.13 dB

Peak SAR (extrapolated) = 1.49 W/kg

SAR(1 g) = 0.866 W/kg; SAR(10 g) = 0.455 W/kg

Maximum value of SAR (measured) = 1.08 W/kg

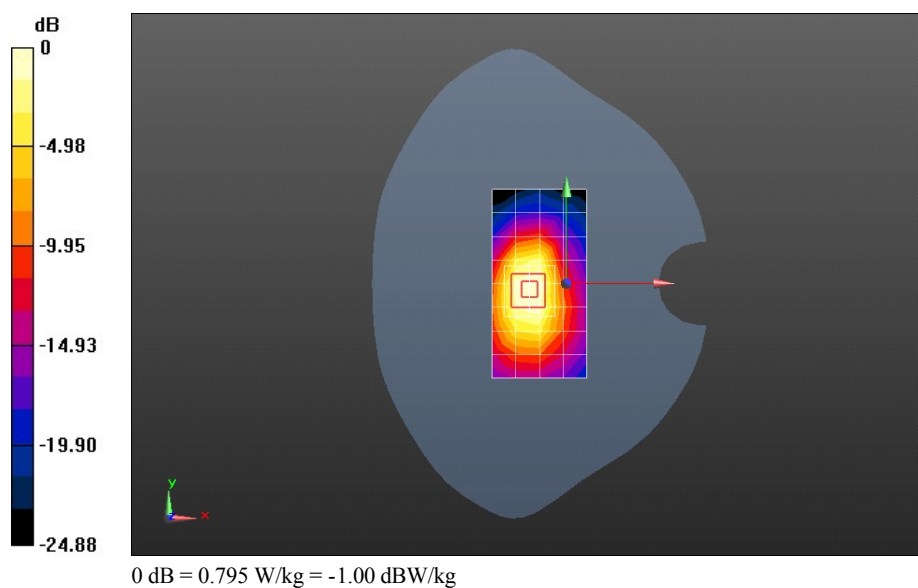

Test Laboratory: HUAWEI SAR/HAC Lab

Che2-L12 GSM1900 GPRS 2TS 661CH Bottom side 10mm-repeated

DUT: Che2-L12; Type: Smart Phone; Serial: SAR1

Communication System: UID 0, HW-GSM\GPRS\EGPRS-2TS (0); Frequency: 1880 MHz; Duty Cycle: 1:4.10015

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.548$ S/m; $\epsilon_r = 51.44$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3744; ConvF(7.17, 7.17, 7.17); Calibrated: 2014-7-24;
- Sensor-Surface: 3mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE4 Sn851; Calibrated: 2014-7-24
- Phantom: SAM2; Type: SAM; Serial: TP:1474
- DASY52 52.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Body/Area Scan (5x9x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 0.731 W/kg


Configuration/Body/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 20.23 V/m; Power Drift = 0.11 dB

Peak SAR (extrapolated) = 1.48 W/kg

SAR(1 g) = 0.858 W/kg; SAR(10 g) = 0.451 W/kg

Maximum value of SAR (measured) = 1.07 W/kg

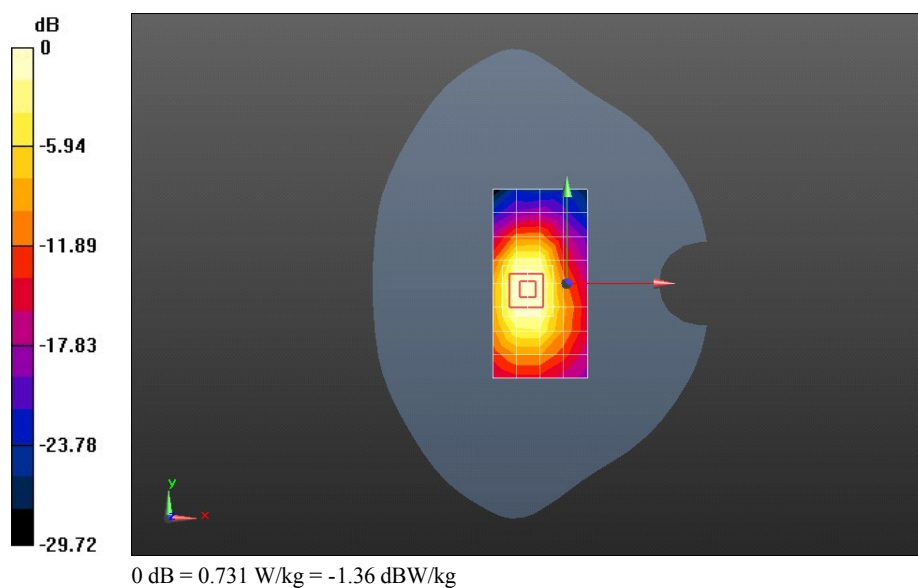

Test Laboratory: HUAWEI SAR/HAC Lab

Che2-L12 GSM1900 GPRS 2TS 512CH Bottom side 10mm

DUT: Che2-L12; Type: Smart Phone; Serial: SAR1

Communication System: UID 0, HW-GSM\GPRS\EGPRS-2TS (0); Frequency: 1850.2 MHz; Duty Cycle: 1:4.10015

Medium parameters used (interpolated): $f = 1850.2$ MHz; $\sigma = 1.522$ S/m; $\epsilon_r = 51.466$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3744; ConvF(7.17, 7.17, 7.17); Calibrated: 2014-7-24;
- Sensor-Surface: 3mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE4 Sn851; Calibrated: 2014-7-24
- Phantom: SAM2; Type: SAM; Serial: TP:1474
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Body/Area Scan (5x9x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.964 W/kg

Configuration/Body/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm


Reference Value = 24.30 V/m; Power Drift = -0.08 dB

Peak SAR (extrapolated) = 1.44 W/kg

SAR(1 g) = 0.841 W/kg; SAR(10 g) = 0.445 W/kg

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 1.05 W/kg

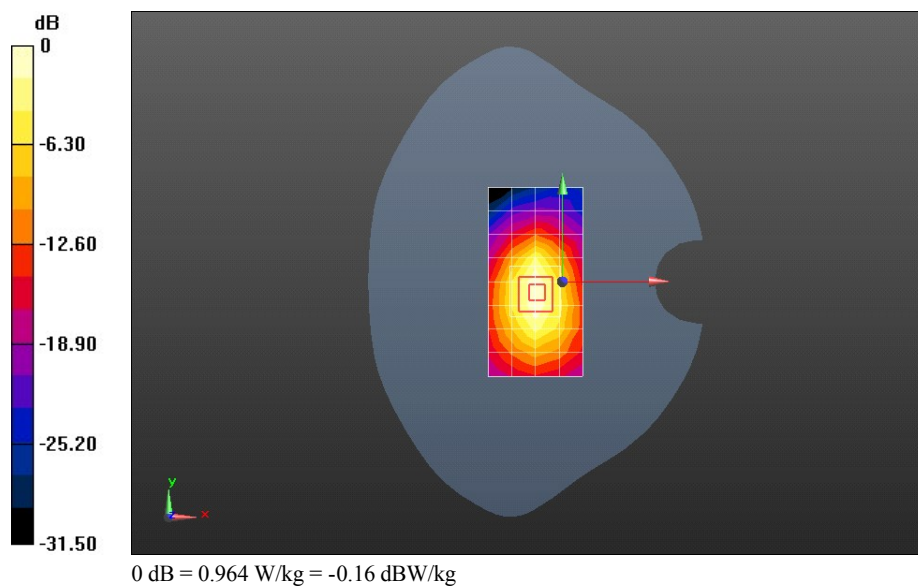

Test Laboratory: HUAWEI SAR/HAC Lab

Che2-L12 GSM1900 GPRS 2TS 810CH Bottom side 10mm

DUT: Che2-L12; Type: Smart Phone; Serial: SAR1

Communication System: UID 0, HW-GSM\GPRS\EGPRS-2TS (0); Frequency: 1909.8 MHz; Duty Cycle: 1:4.10015

Medium parameters used: $f = 1910$ MHz; $\sigma = 1.579$ S/m; $\epsilon_r = 51.295$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3744; ConvF(7.17, 7.17, 7.17); Calibrated: 2014-7-24;
- Sensor-Surface: 3mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE4 Sn851; Calibrated: 2014-7-24
- Phantom: SAM2; Type: SAM; Serial: TP:1474
- DASY52 52.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Body/Area Scan (5x9x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 0.975 W/kg


Configuration/Body/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 23.64 V/m; Power Drift = -0.03 dB

Peak SAR (extrapolated) = 1.43 W/kg

SAR(1 g) = 0.825 W/kg; SAR(10 g) = 0.432 W/kg

Maximum value of SAR (measured) = 1.03 W/kg

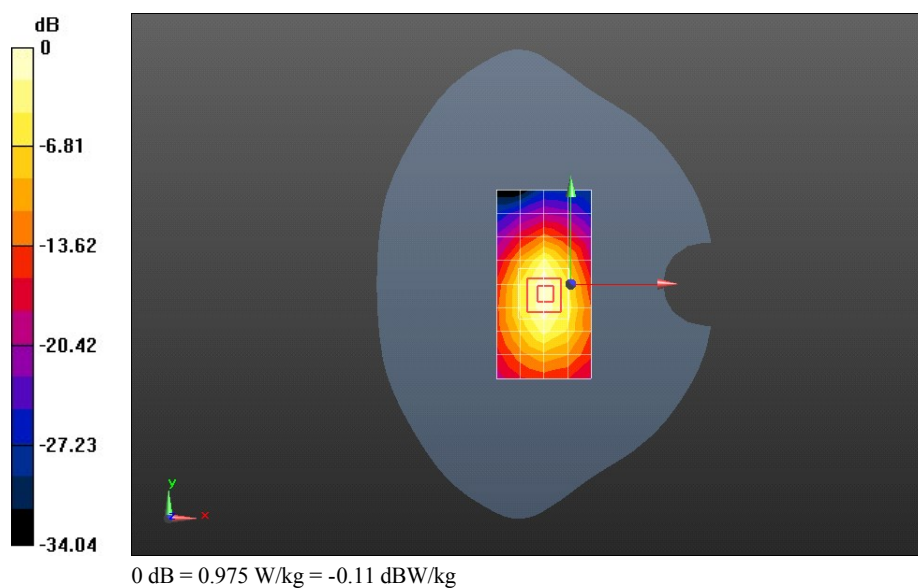

Test Laboratory: HUAWEI SAR/HAC Lab

Che2-L12 GSM1900 GPRS 2TS 512CH Bottom side 10mm with battery 2#

DUT: Che2-L12; Type: Smart Phone; Serial: SAR1

Communication System: UID 0, HW-GSM\GPRS\EGPRS-2TS (0); Frequency: 1850.2 MHz; Duty Cycle: 1:4.10015

Medium parameters used (interpolated): $f = 1850.2$ MHz; $\sigma = 1.522$ S/m; $\epsilon_r = 51.466$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3744; ConvF(7.17, 7.17, 7.17); Calibrated: 2014-7-24;
- Sensor-Surface: 3mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE4 Sn851; Calibrated: 2014-7-24
- Phantom: SAM2; Type: SAM; Serial: TP:1474
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Body/Area Scan (5x9x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.935 W/kg

Configuration/Body/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm


Reference Value = 23.66 V/m; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 1.33 W/kg

SAR(1 g) = 0.780 W/kg; SAR(10 g) = 0.411 W/kg

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.974 W/kg

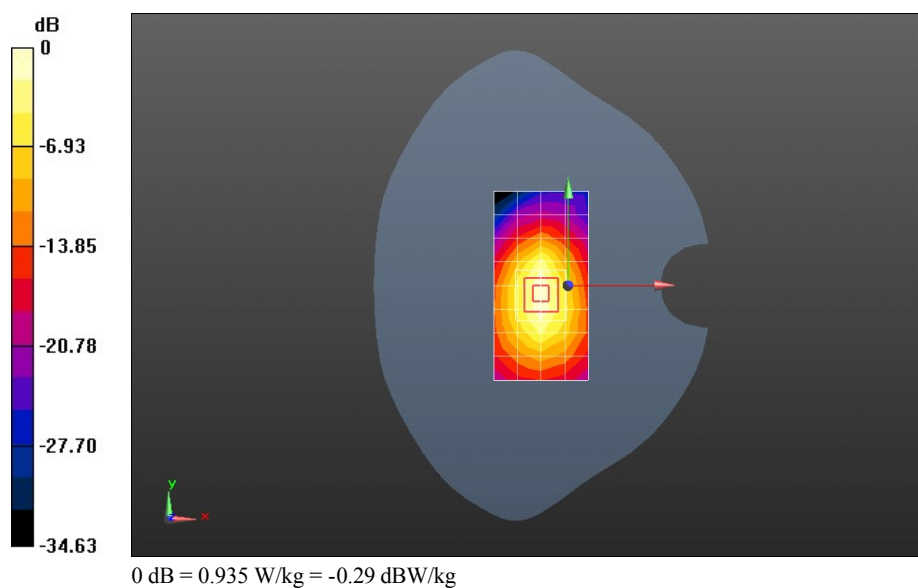

Test Laboratory: HUAWEI SAR/HAC Lab

Che2-L12 UMTS Band V 4233CH Right hand touch cheek

DUT: Che2-L12; Type: Smart Phone; Serial: SAR1

Communication System: UID 0, HW-UMTS-FDD(WCDMA) (0); Frequency: 846.6 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 847$ MHz; $\sigma = 0.878$ S/m; $\epsilon_r = 41.191$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY Configuration:

- Probe: EX3DV4 - SN3744; ConvF(9.09, 9.09, 9.09); Calibrated: 2014-7-24;
- Sensor-Surface: 3mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE4 Sn851; Calibrated: 2014-7-24
- Phantom: SAM1; Type: SAM; Serial: TP-1475
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Head/Area Scan (9x14x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 0.301 W/kg


Configuration/Head/Zoom Scan (6x6x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 8.006 V/m; Power Drift = 0.18 dB

Peak SAR (extrapolated) = 0.361 W/kg

SAR(1 g) = 0.283 W/kg; SAR(10 g) = 0.213 W/kg

Maximum value of SAR (measured) = 0.310 W/kg

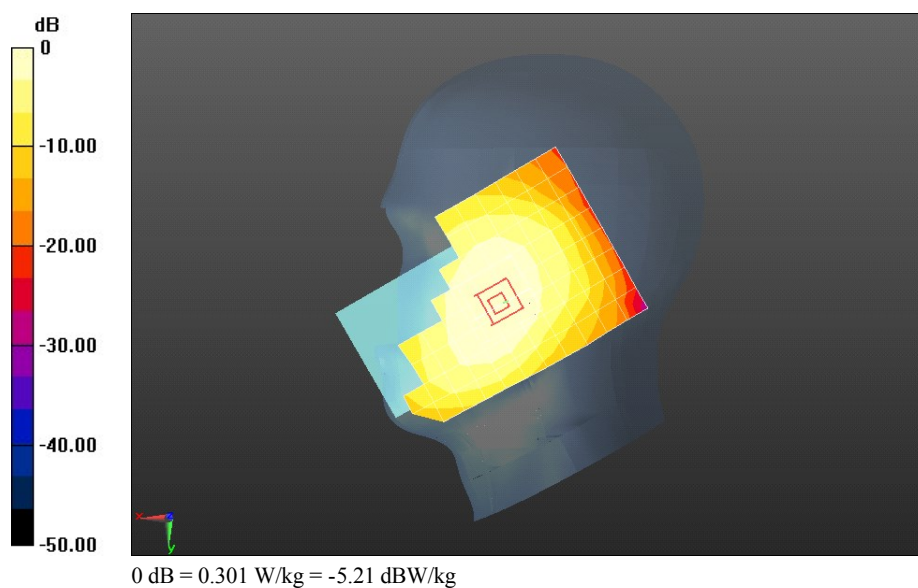

Test Laboratory: HUAWEI SAR/HAC Lab

Che2-L12 UMTS Band V 4233CH Right hand touch cheek with battery 2#

DUT: Che2-L12; Type: Smart Phone; Serial: SAR1

Communication System: UID 0, HW-UMTS-FDD(WCDMA) (0); Frequency: 846.6 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 847$ MHz; $\sigma = 0.878$ S/m; $\epsilon_r = 41.191$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY Configuration:

- Probe: EX3DV4 - SN3744; ConvF(9.09, 9.09, 9.09); Calibrated: 2014-7-24;
- Sensor-Surface: 3mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE4 Sn851; Calibrated: 2014-7-24
- Phantom: SAM1; Type: SAM; Serial: TP-1475
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Head/Area Scan (9x14x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 0.317 W/kg


Configuration/Head/Zoom Scan (6x6x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 8.146 V/m; Power Drift = 0.02 dB

Peak SAR (extrapolated) = 0.368 W/kg

SAR(1 g) = 0.289 W/kg; SAR(10 g) = 0.218 W/kg

Maximum value of SAR (measured) = 0.316 W/kg

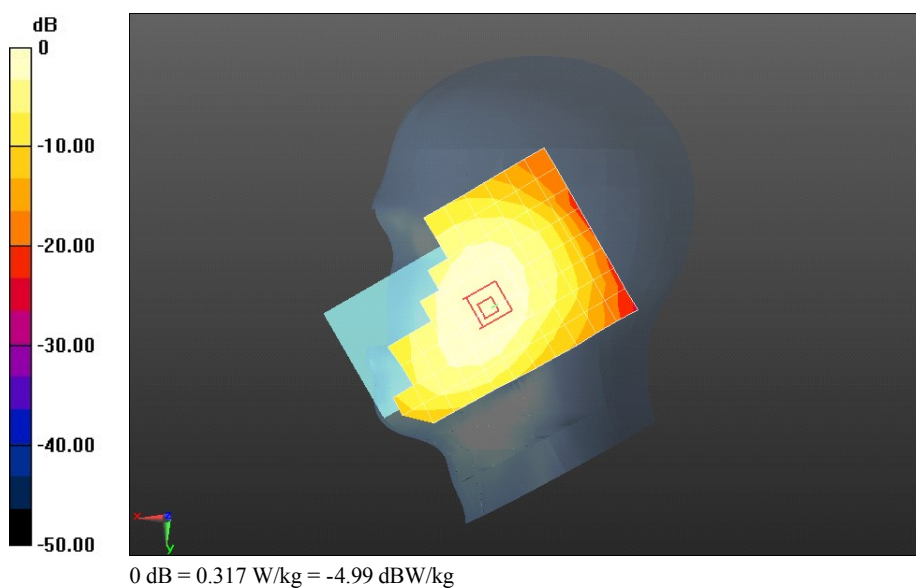

Test Laboratory: HUAWEI SAR/HAC Lab

Che2-L12 UMTS Band V 4182CH Back side 15mm

DUT: Che2-L12; Type: Smart Phone; Serial: SAR1

Communication System: UID 0, HW-UMTS-FDD(WCDMA) (0); Frequency: 836.4 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 836.4$ MHz; $\sigma = 0.954$ S/m; $\epsilon_r = 55.26$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3744; ConvF(9.06, 9.06, 9.06); Calibrated: 2014-7-24;
- Sensor-Surface: 3mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE4 Sn851; Calibrated: 2014-7-24
- Phantom: SAM1; Type: SAM; Serial: TP-1475
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Body/Area Scan (9x13x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.392 W/kg

Configuration/Body/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm


Reference Value = 19.86 V/m; Power Drift = -0.00 dB

Peak SAR (extrapolated) = 0.458 W/kg

SAR(1 g) = 0.364 W/kg; SAR(10 g) = 0.279 W/kg

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.399 W/kg

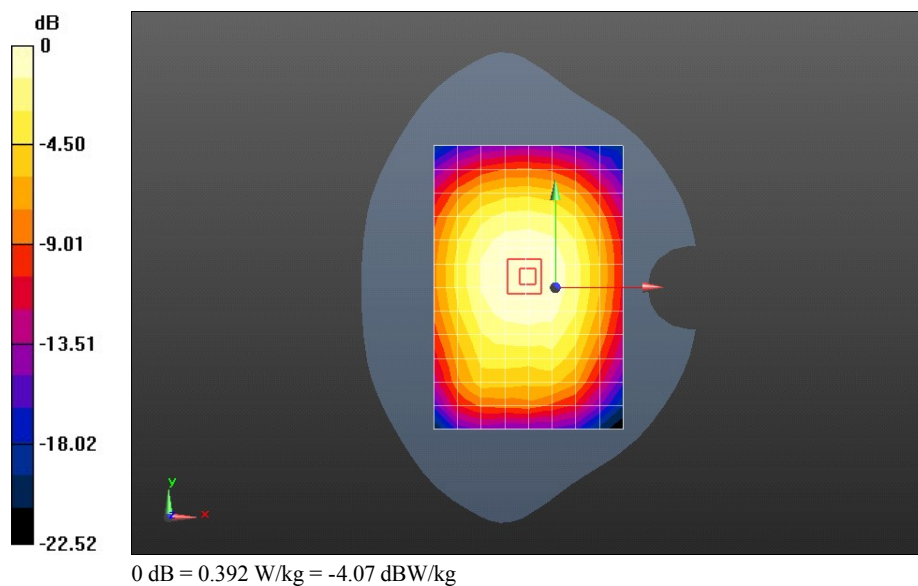

Test Laboratory: HUAWEI SAR/HAC Lab

Che2-L12 UMTS Band V 4182CH Back side 15mm with battery 2#

DUT: Che2-L12; Type: Smart Phone; Serial: SAR1

Communication System: UID 0, HW-UMTS-FDD(WCDMA) (0); Frequency: 836.4 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 836.4$ MHz; $\sigma = 0.954$ S/m; $\epsilon_r = 55.26$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3744; ConvF(9.06, 9.06, 9.06); Calibrated: 2014-7-24;
- Sensor-Surface: 3mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE4 Sn851; Calibrated: 2014-7-24
- Phantom: SAM1; Type: SAM; Serial: TP-1475
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Body/Area Scan (9x13x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.391 W/kg

Configuration/Body/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm


Reference Value = 18.72 V/m; Power Drift = 0.15 dB

Peak SAR (extrapolated) = 0.447 W/kg

SAR(1 g) = 0.356 W/kg; SAR(10 g) = 0.274 W/kg

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.390 W/kg

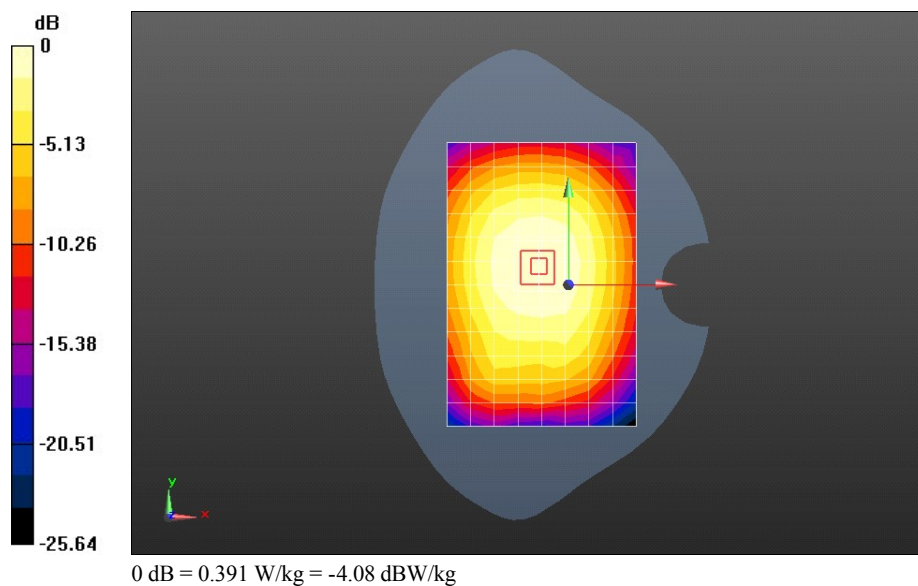

Test Laboratory: HUAWEI SAR/HAC Lab

Che2-L12 UMTS Band V 4182CH Back side 10mm

DUT: Che2-L12; Type: Smart Phone; Serial: SAR1

Communication System: UID 0, HW-UMTS-FDD(WCDMA) (0); Frequency: 836.4 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 836.4$ MHz; $\sigma = 0.954$ S/m; $\epsilon_r = 55.26$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3744; ConvF(9.06, 9.06, 9.06); Calibrated: 2014-7-24;
- Sensor-Surface: 3mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE4 Sn851; Calibrated: 2014-7-24
- Phantom: SAM1; Type: SAM; Serial: TP-1475
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Body/Area Scan (9x13x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.487 W/kg

Configuration/Body/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm


Reference Value = 22.51 V/m; Power Drift = -0.15 dB

Peak SAR (extrapolated) = 0.563 W/kg

SAR(1 g) = 0.448 W/kg; SAR(10 g) = 0.346 W/kg

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.489 W/kg

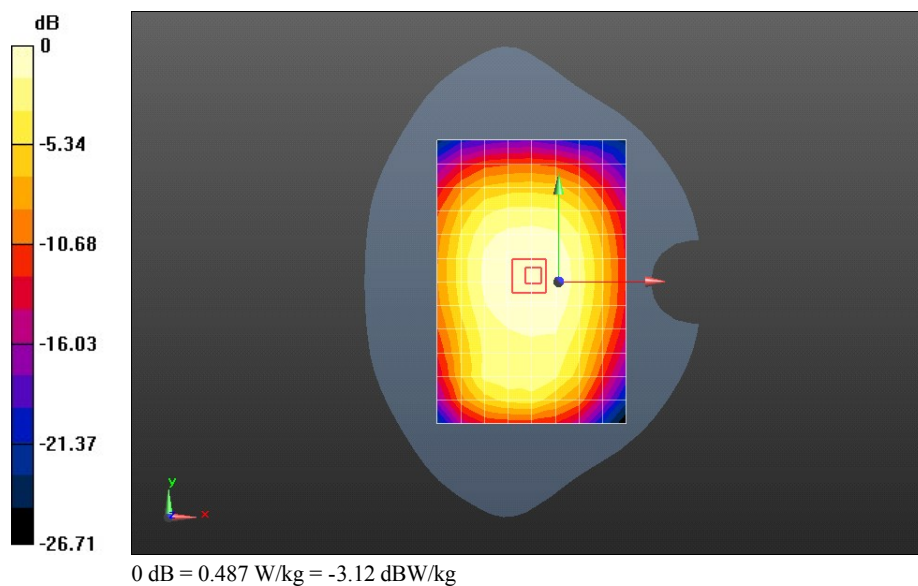

Test Laboratory: HUAWEI SAR/HAC Lab

Che2-L12 UMTS Band V 4182CH Back side 10mm with battery 2#

DUT: Che2-L12; Type: Smart Phone; Serial: SAR1

Communication System: UID 0, HW-UMTS-FDD(WCDMA) (0); Frequency: 836.4 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 836.4$ MHz; $\sigma = 0.954$ S/m; $\epsilon_r = 55.26$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3744; ConvF(9.06, 9.06, 9.06); Calibrated: 2014-7-24;
- Sensor-Surface: 3mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE4 Sn851; Calibrated: 2014-7-24
- Phantom: SAM1; Type: SAM; Serial: TP-1475
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Body/Area Scan (9x13x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.474 W/kg

Configuration/Body/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm


Reference Value = 21.80 V/m; Power Drift = -0.02 dB

Peak SAR (extrapolated) = 0.551 W/kg

SAR(1 g) = 0.440 W/kg; SAR(10 g) = 0.341 W/kg

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.480 W/kg

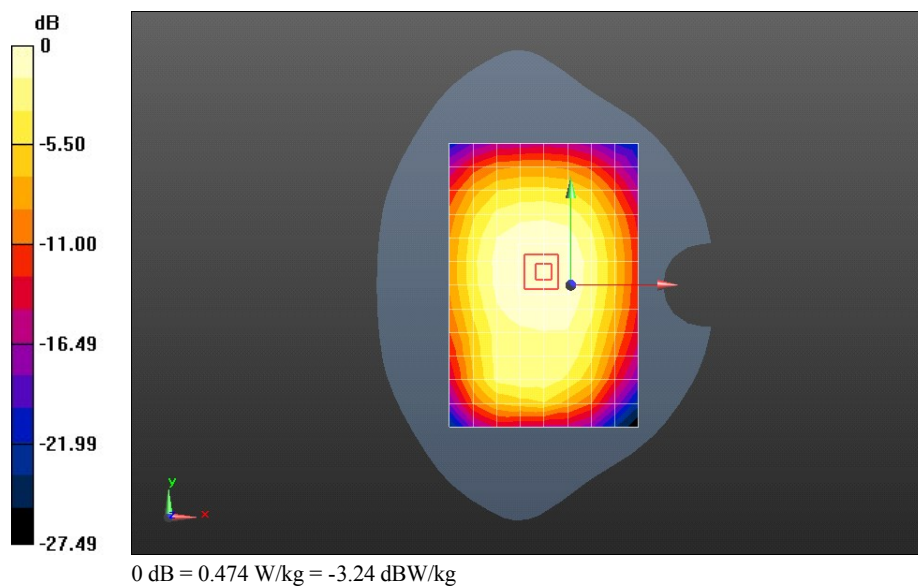

Test Laboratory: HUAWEI SAR/HAC Lab

Che2-L12 LTE Band V 10M QPSK 1RB#25 20600CH Left hand touch cheek with Battery 2#

DUT: Che2-L12; Type: Smart Phone; Serial: SAR1

Communication System: UID 0, LTE-FDD (SC-FDMA, 10MHz, QPSK/16-QAM) (0); Frequency: 844 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 844$ MHz; $\sigma = 0.875$ S/m; $\epsilon_r = 41.194$; $\rho = 1000$ kg/m³

Phantom section: Left Section

DASY Configuration:

- Probe: EX3DV4 - SN3744; ConvF(9.09, 9.09, 9.09); Calibrated: 2014-7-24;
- Sensor-Surface: 3mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE4 Sn851; Calibrated: 2014-7-24
- Phantom: SAM1; Type: SAM; Serial: TP-1475
- DASY52 52.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Head/Area Scan (9x14x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 0.229 W/kg


Configuration/Head/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 7.189 V/m; Power Drift = 0.14 dB

Peak SAR (extrapolated) = 0.274 W/kg

SAR(1 g) = 0.216 W/kg; SAR(10 g) = 0.164 W/kg

Maximum value of SAR (measured) = 0.239 W/kg

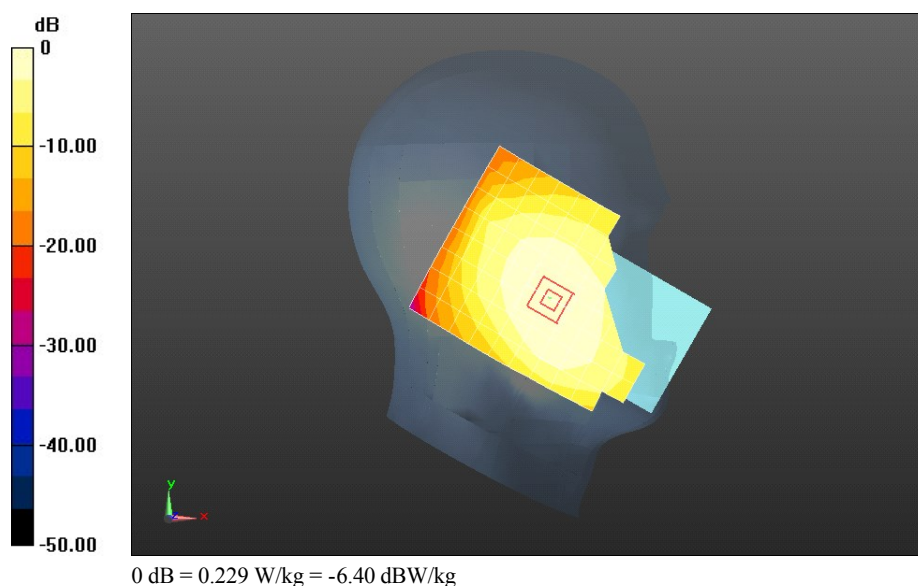

Test Laboratory: HUAWEI SAR/HAC Lab

Che2-L12 LTE Band V 10M QPSK 1RB#25 20450CH Back side 15mm

DUT: Che2-L12; Type: Smart Phone; Serial: SAR1

Communication System: UID 0, LTE-FDD (SC-FDMA, 10MHz, QPSK/16-QAM) (0); Frequency: 829 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 829$ MHz; $\sigma = 0.95$ S/m; $\epsilon_r = 55.277$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3744; ConvF(9.06, 9.06, 9.06); Calibrated: 2014-7-24;
- Sensor-Surface: 3mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE4 Sn851; Calibrated: 2014-7-24
- Phantom: SAM1; Type: SAM; Serial: TP-1475
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Body/Area Scan (8x13x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 0.370 W/kg


Configuration/Body/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 19.29 V/m; Power Drift = -0.02 dB

Peak SAR (extrapolated) = 0.434 W/kg

SAR(1 g) = 0.346 W/kg; SAR(10 g) = 0.267 W/kg

Maximum value of SAR (measured) = 0.379 W/kg

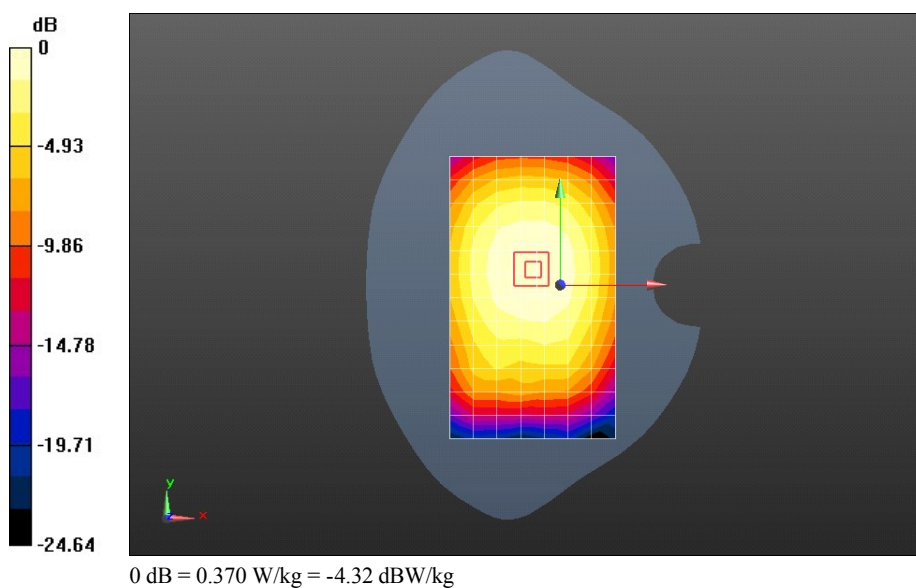

Test Laboratory: HUAWEI SAR/HAC Lab

Che2-L12 LTE Band V 10M QPSK 1RB#25 20450CH Back side 10mm

DUT: Che2-L12; Type: Smart Phone; Serial: SAR1

Communication System: UID 0, LTE-FDD (SC-FDMA, 10MHz, QPSK/16-QAM) (0); Frequency: 829 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 829$ MHz; $\sigma = 0.95$ S/m; $\epsilon_r = 55.277$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3744; ConvF(9.06, 9.06, 9.06); Calibrated: 2014-7-24;
- Sensor-Surface: 3mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE4 Sn851; Calibrated: 2014-7-24
- Phantom: SAM1; Type: SAM; Serial: TP-1475
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Body/Area Scan (8x13x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 0.443 W/kg

Configuration/Body/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 21.03 V/m; Power Drift = 0.00 dB

Peak SAR (extrapolated) = 0.506 W/kg

SAR(1 g) = 0.405 W/kg; SAR(10 g) = 0.314 W/kg


Configuration/Body/Zoom Scan (5x5x7)/Cube 1: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 21.03 V/m; Power Drift = 0.00 dB

Peak SAR (extrapolated) = 0.441 W/kg

SAR(1 g) = 0.230 W/kg; SAR(10 g) = 0.138 W/kg

Maximum value of SAR (measured) = 0.282 W/kg

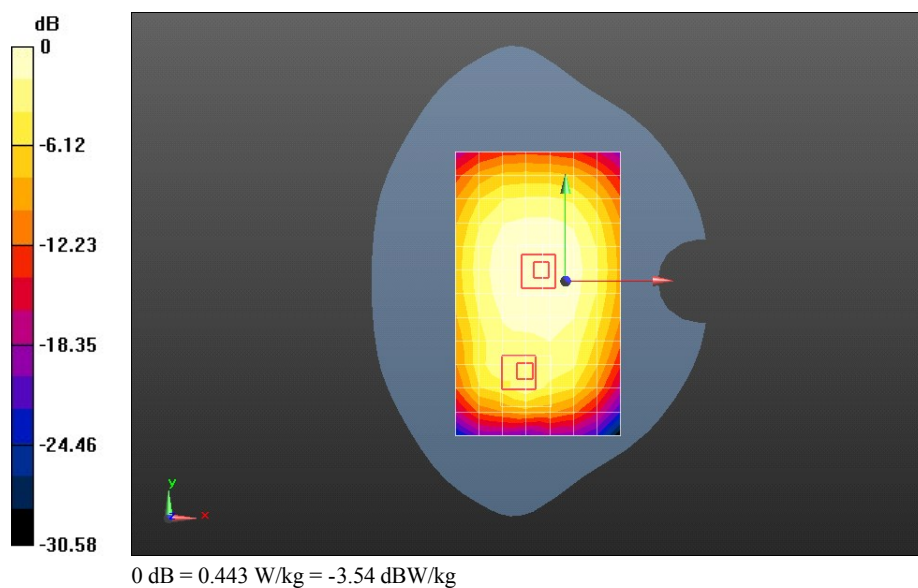

Test Laboratory: HUAWEI SAR/HAC Lab

Che2-L12 LTE Band VII 20M QPSK 1RB#0 20850CH Right hand touch cheek

DUT: Che2-L12; Type: Smart Phone; Serial: SAR1

Communication System: UID 0, LTE-FDD (SC-FDMA, 20MHz, QPSK/16-QAM) (0); Frequency: 2510 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 2510$ MHz; $\sigma = 1.945$ S/m; $\epsilon_r = 39.101$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY Configuration:

- Probe: EX3DV4 - SN3744; ConvF(6.91, 6.91, 6.91); Calibrated: 2014-7-24;
- Sensor-Surface: 3mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE4 Sn851; Calibrated: 2014-7-24
- Phantom: SAM1; Type: SAM; Serial: TP-1475
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Head/Area Scan (9x15x1): Measurement grid: $dx=12$ mm, $dy=12$ mm

Maximum value of SAR (measured) = 0.210 W/kg


Configuration/Head/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 3.106 V/m; Power Drift = 0.15 dB

Peak SAR (extrapolated) = 0.329 W/kg

SAR(1 g) = 0.187 W/kg; SAR(10 g) = 0.100 W/kg

Maximum value of SAR (measured) = 0.230 W/kg

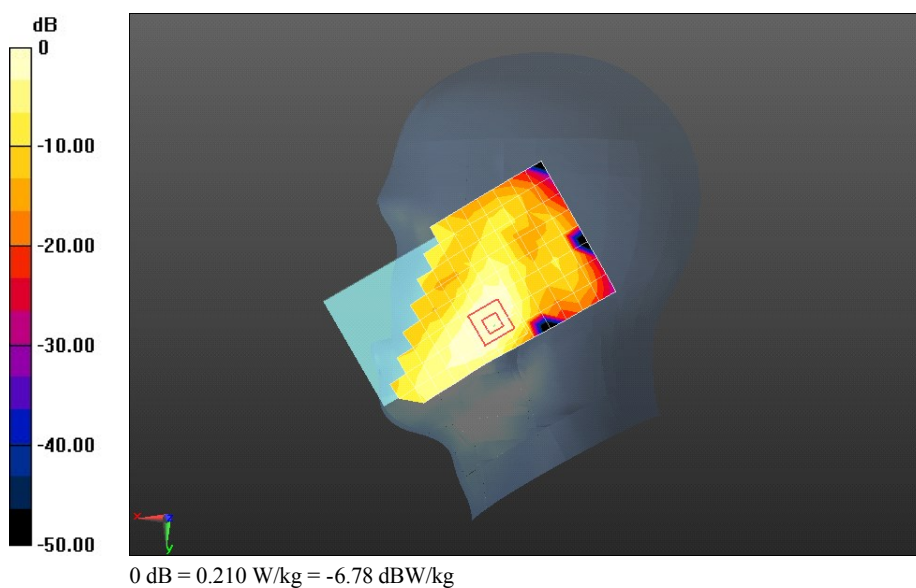

Test Laboratory: HUAWEI SAR/HAC Lab

Che2-L12 LTE Band VII 20M QPSK 1RB#0 20850CH Right hand touch cheek with battery2#

DUT: Che2-L12; Type: Smart Phone; Serial: SAR1

Communication System: UID 0, LTE-FDD (SC-FDMA, 20MHz, QPSK/16-QAM) (0); Frequency: 2510 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 2510$ MHz; $\sigma = 1.945$ S/m; $\epsilon_r = 39.101$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY Configuration:

- Probe: EX3DV4 - SN3744; ConvF(6.91, 6.91, 6.91); Calibrated: 2014-7-24;
- Sensor-Surface: 3mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE4 Sn851; Calibrated: 2014-7-24
- Phantom: SAM1; Type: SAM; Serial: TP-1475
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Head/Area Scan (9x15x1): Measurement grid: $dx=12$ mm, $dy=12$ mm

Maximum value of SAR (measured) = 0.200 W/kg


Configuration/Head/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 3.043 V/m; Power Drift = 0.08 dB

Peak SAR (extrapolated) = 0.324 W/kg

SAR(1 g) = 0.179 W/kg; SAR(10 g) = 0.096 W/kg

Maximum value of SAR (measured) = 0.223 W/kg

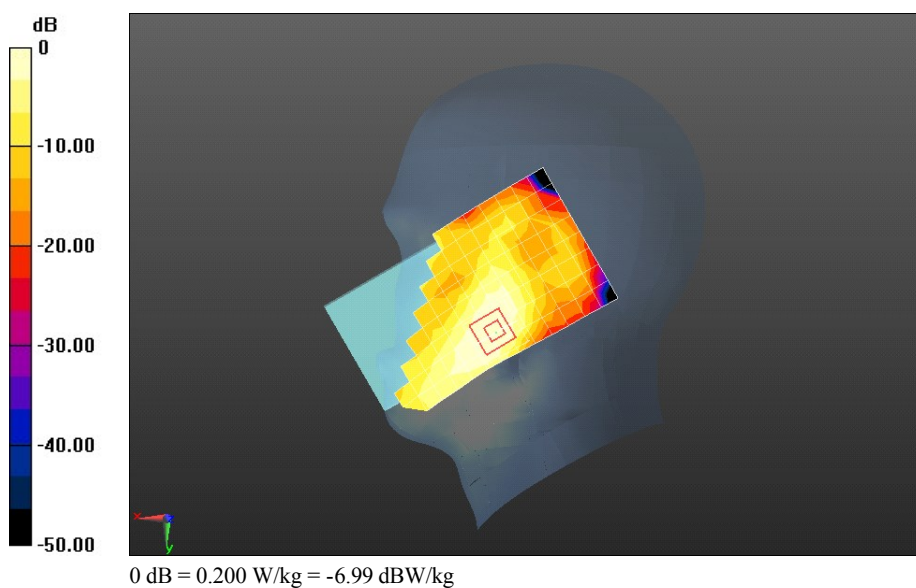

Test Laboratory: HUAWEI SAR/HAC Lab

Che2-L12 LTE Band VII 20M QPSK 50%RB#50 21100CH Front side 15mm

DUT: Che2-L12; Type: Smart Phone; Serial: SAR1

Communication System: UID 0, LTE-FDD (SC-FDMA, 20MHz, QPSK/16-QAM) (0); Frequency: 2535 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 2535$ MHz; $\sigma = 2.035$ S/m; $\epsilon_r = 50.165$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3744; ConvF(6.54, 6.54, 6.54); Calibrated: 2014-7-24;
- Sensor-Surface: 3mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE4 Sn851; Calibrated: 2014-7-24
- Phantom: SAM1; Type: SAM; Serial: TP-1475
- DASY52 52.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Body/Area Scan (10x16x1): Measurement grid: $dx=12$ mm, $dy=12$ mm

Maximum value of SAR (measured) = 0.361 W/kg


Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 5.413 V/m; Power Drift = 0.12 dB

Peak SAR (extrapolated) = 0.581 W/kg

SAR(1 g) = 0.302 W/kg; SAR(10 g) = 0.158 W/kg

Maximum value of SAR (measured) = 0.380 W/kg

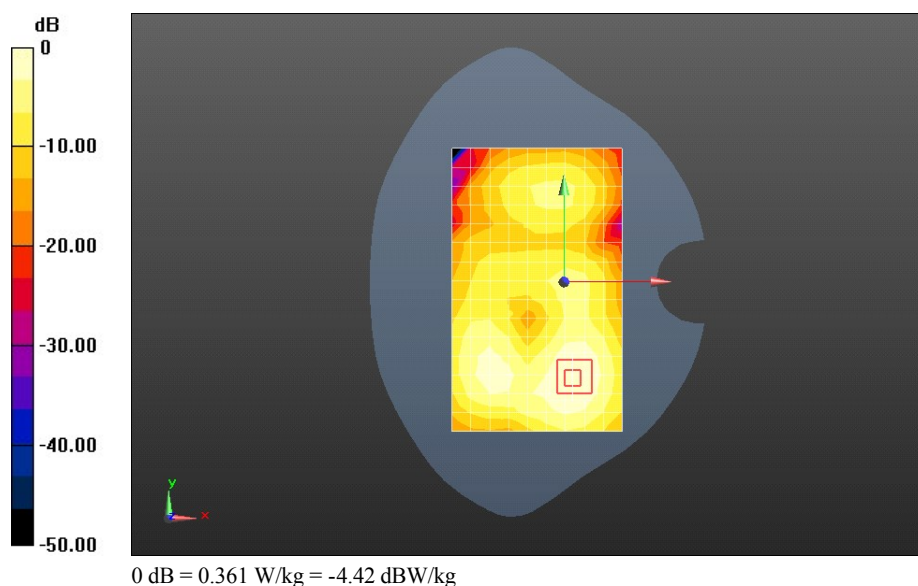

Test Laboratory: HUAWEI SAR/HAC Lab

Che2-L12 LTE Band VII 20M QPSK 50%RB#50 21100CH Front side 15mm with battery 2#

DUT: Che2-L12; Type: Smart Phone; Serial: SAR1

Communication System: UID 0, LTE-FDD (SC-FDMA, 20MHz, QPSK/16-QAM) (0); Frequency: 2535 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 2535$ MHz; $\sigma = 2.035$ S/m; $\epsilon_r = 50.165$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3744; ConvF(6.54, 6.54, 6.54); Calibrated: 2014-7-24;
- Sensor-Surface: 3mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE4 Sn851; Calibrated: 2014-7-24
- Phantom: SAM1; Type: SAM; Serial: TP-1475
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Body/Area Scan (10x16x1): Measurement grid: $dx=12$ mm, $dy=12$ mm

Maximum value of SAR (measured) = 0.312 W/kg


Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 4.786 V/m; Power Drift = -0.01 dB

Peak SAR (extrapolated) = 0.488 W/kg

SAR(1 g) = 0.254 W/kg; SAR(10 g) = 0.133 W/kg

Maximum value of SAR (measured) = 0.319 W/kg

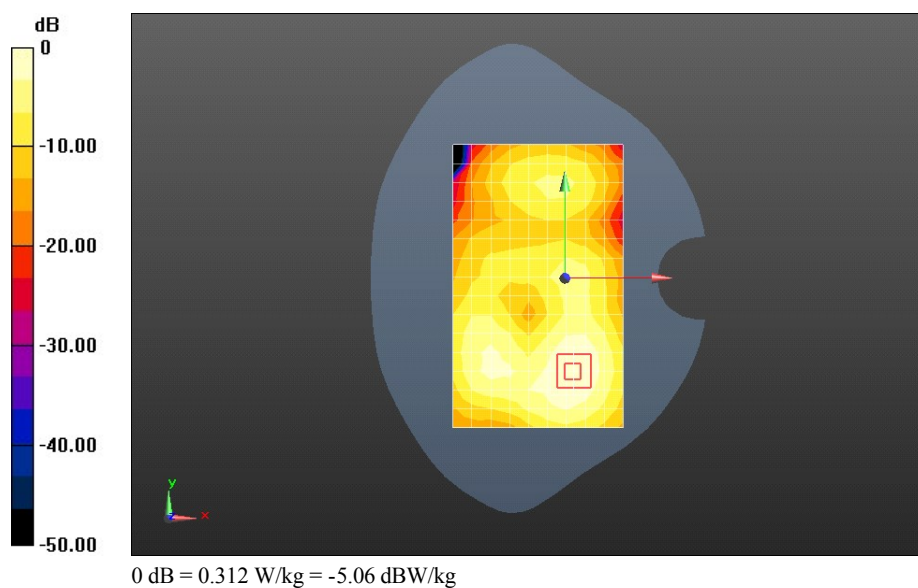

Test Laboratory: HUAWEI SAR/HAC Lab

Che2-L12 LTE Band VII 20M QPSK 50%RB#50 21100CH Bottom side 10mm

DUT: Che2-L12; Type: Smart Phone; Serial: SAR1

Communication System: UID 0, LTE-FDD (SC-FDMA, 20MHz, QPSK/16-QAM) (0); Frequency: 2535 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 2535$ MHz; $\sigma = 2.035$ S/m; $\epsilon_r = 50.165$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3744; ConvF(6.54, 6.54, 6.54); Calibrated: 2014-7-24;
- Sensor-Surface: 3mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE4 Sn851; Calibrated: 2014-7-24
- Phantom: SAM1; Type: SAM; Serial: TP-1475
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Body/Area Scan (6x11x1): Measurement grid: $dx=12$ mm, $dy=12$ mm

Maximum value of SAR (measured) = 0.816 W/kg


Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 7.170 V/m; Power Drift = -0.12 dB

Peak SAR (extrapolated) = 1.25 W/kg

SAR(1 g) = 0.624 W/kg; SAR(10 g) = 0.289 W/kg

Maximum value of SAR (measured) = 0.810 W/kg

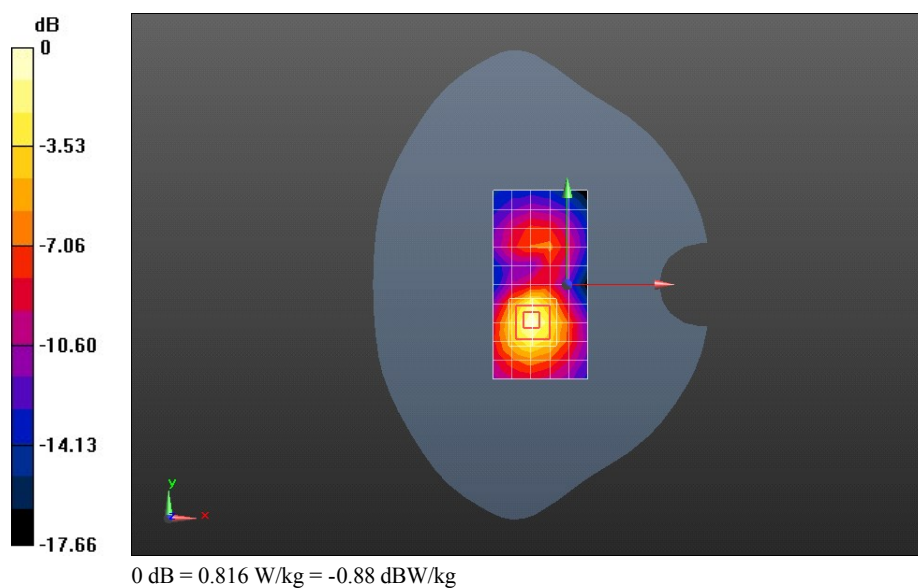

Test Laboratory: HUAWEI SAR/HAC Lab

Che2-L12 LTE Band VII 20M QPSK 50%RB#50 21100CH Bottom side 10mm with battery 2#

DUT: Che2-L12; Type: Smart Phone; Serial: SAR1

Communication System: UID 0, LTE-FDD (SC-FDMA, 20MHz, QPSK/16-QAM) (0); Frequency: 2535 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 2535$ MHz; $\sigma = 2.035$ S/m; $\epsilon_r = 50.165$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3744; ConvF(6.54, 6.54, 6.54); Calibrated: 2014-7-24;
- Sensor-Surface: 3mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE4 Sn851; Calibrated: 2014-7-24
- Phantom: SAM1; Type: SAM; Serial: TP-1475
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Body/Area Scan (6x11x1): Measurement grid: $dx=12$ mm, $dy=12$ mm

Maximum value of SAR (measured) = 0.732 W/kg


Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 7.334 V/m; Power Drift = 0.09 dB

Peak SAR (extrapolated) = 1.23 W/kg

SAR(1 g) = 0.613 W/kg; SAR(10 g) = 0.284 W/kg

Maximum value of SAR (measured) = 0.807 W/kg

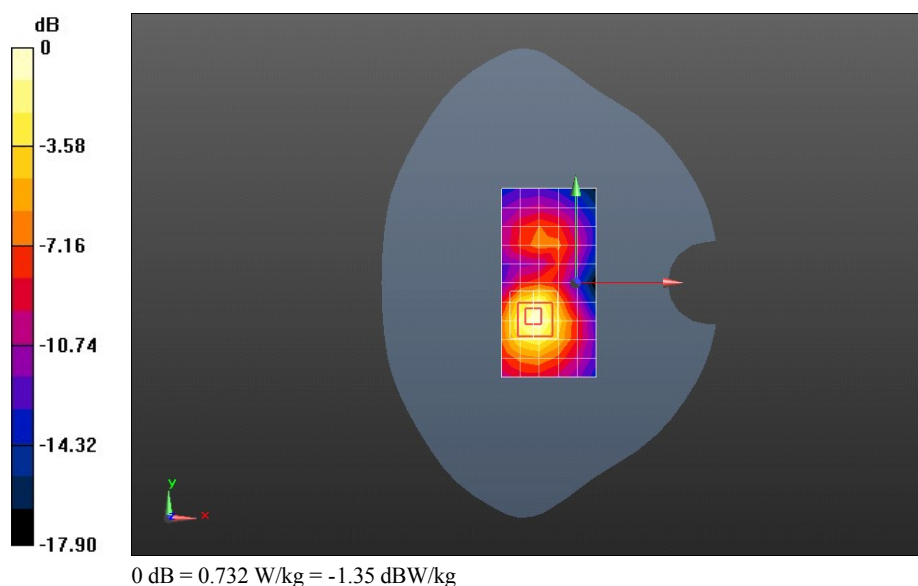

Test Laboratory: HUAWEI SAR/HAC Lab

Che2-L12 WiFi 802.11b 1CH Left hand touch cheek

DUT: Che2-L12; Type: Smart Phone; Serial: SAR1

Communication System: UID 0, WiFi(802.11a/b/g/n/ac) (0); Frequency: 2412 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 2412$ MHz; $\sigma = 1.785$ S/m; $\epsilon_r = 40.03$; $\rho = 1000$ kg/m³

Phantom section: Left Section

DASY Configuration:

- Probe: EX3DV4 - SN3744; ConvF(7.08, 7.08, 7.08); Calibrated: 2014-7-24;
- Sensor-Surface: 3mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE4 Sn851; Calibrated: 2014-7-24
- Phantom: SAM1; Type: SAM; Serial: TP-1475
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Head/Area Scan (9x16x1): Measurement grid: $dx=12$ mm, $dy=12$ mm

Maximum value of SAR (measured) = 0.484 W/kg


Configuration/Head/Zoom Scan (7x8x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 10.09 V/m; Power Drift = 0.13 dB

Peak SAR (extrapolated) = 0.880 W/kg

SAR(1 g) = 0.412 W/kg; SAR(10 g) = 0.197 W/kg

Maximum value of SAR (measured) = 0.544 W/kg

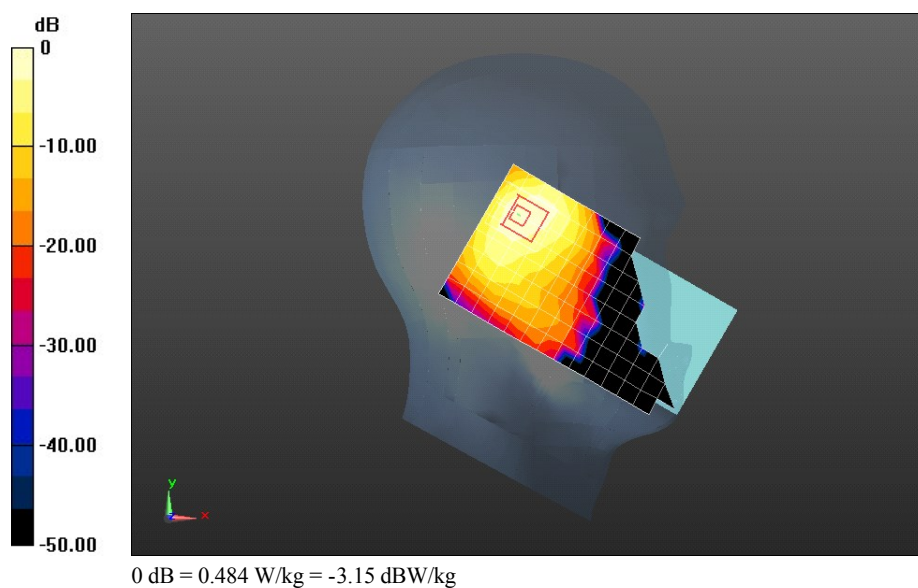

Test Laboratory: HUAWEI SAR/HAC Lab

Che2-L12 WiFi 802.11b 1CH Left hand touch cheek with battery 2#

DUT: Che2-L12; Type: Smart Phone; Serial: SAR1

Communication System: UID 0, WiFi(802.11a/b/g/n/ac) (0); Frequency: 2412 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 2412$ MHz; $\sigma = 1.785$ S/m; $\epsilon_r = 40.03$; $\rho = 1000$ kg/m³

Phantom section: Left Section

DASY Configuration:

- Probe: EX3DV4 - SN3744; ConvF(7.08, 7.08, 7.08); Calibrated: 2014-7-24;
- Sensor-Surface: 3mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE4 Sn851; Calibrated: 2014-7-24
- Phantom: SAM1; Type: SAM; Serial: TP-1475
- DASY52 52.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Head/Area Scan (9x16x1): Measurement grid: $dx=12$ mm, $dy=12$ mm

Maximum value of SAR (measured) = 0.378 W/kg


Configuration/Head/Zoom Scan (7x8x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 9.158 V/m; Power Drift = 0.07 dB

Peak SAR (extrapolated) = 0.698 W/kg

SAR(1 g) = 0.333 W/kg; SAR(10 g) = 0.161 W/kg

Maximum value of SAR (measured) = 0.440 W/kg

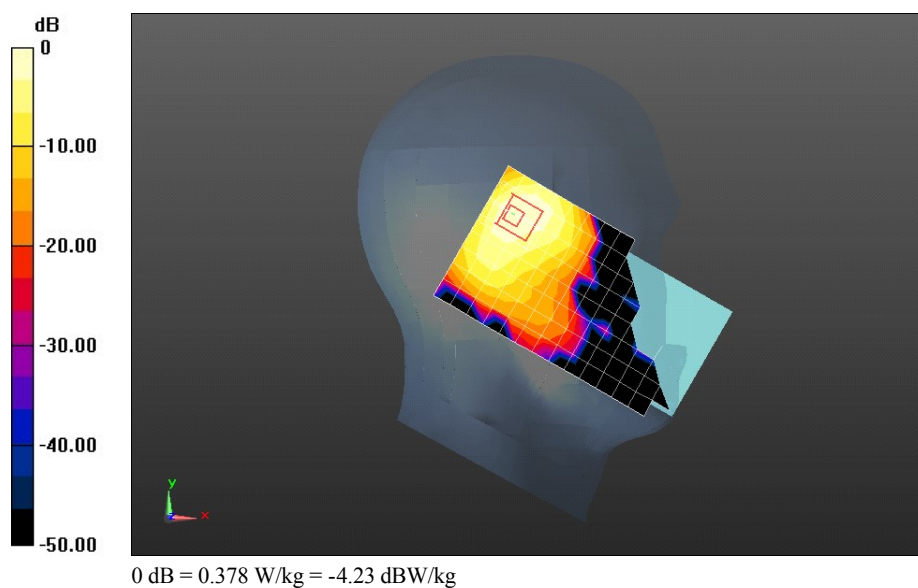

Test Laboratory: HUAWEI SAR/HAC Lab

Che2-L12 WiFi 802.11b 6CH Back side 15mm

DUT: Che2-L12; Type: Smart Phone; Serial: SAR1

Communication System: UID 0, WiFi(802.11a/b/g/n/ac) (0); Frequency: 2437 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 2437$ MHz; $\sigma = 1.916$ S/m; $\epsilon_r = 50.851$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3744; ConvF(6.69, 6.69, 6.69); Calibrated: 2014-7-24;
- Sensor-Surface: 3mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE4 Sn851; Calibrated: 2014-7-24
- Phantom: SAM1; Type: SAM; Serial: TP-1475
- DASY52 52.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Body/Area Scan (10x16x1): Measurement grid: $dx=12$ mm, $dy=12$ mm

Maximum value of SAR (measured) = 0.0923 W/kg


Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 1.782 V/m; Power Drift = 0.09 dB

Peak SAR (extrapolated) = 0.183 W/kg

SAR(1 g) = 0.082 W/kg; SAR(10 g) = 0.037 W/kg

Maximum value of SAR (measured) = 0.109 W/kg

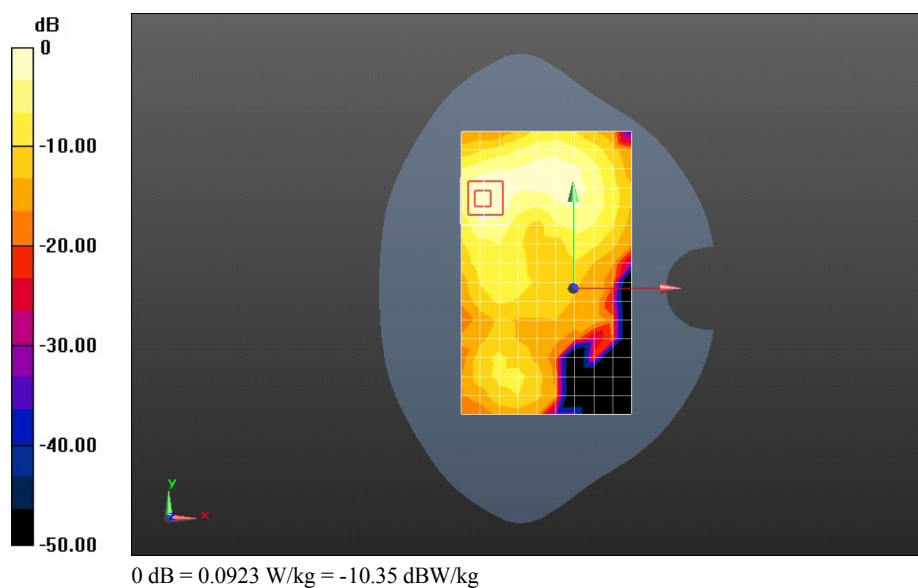

Test Laboratory: HUAWEI SAR/HAC Lab

Che2-L12 WiFi 802.11b 6CH Back side 15mm with battery 2#

DUT: Che2-L12; Type: Smart Phone; Serial: SAR1

Communication System: UID 0, WiFi(802.11a/b/g/n/ac) (0); Frequency: 2437 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 2437$ MHz; $\sigma = 1.916$ S/m; $\epsilon_r = 50.851$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3744; ConvF(6.69, 6.69, 6.69); Calibrated: 2014-7-24;
- Sensor-Surface: 3mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE4 Sn851; Calibrated: 2014-7-24
- Phantom: SAM1; Type: SAM; Serial: TP-1475
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Body/Area Scan (10x16x1): Measurement grid: $dx=12$ mm, $dy=12$ mm

Maximum value of SAR (measured) = 0.0863 W/kg


Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 1.321 V/m; Power Drift = 0.14 dB

Peak SAR (extrapolated) = 0.167 W/kg

SAR(1 g) = 0.073 W/kg; SAR(10 g) = 0.033 W/kg

Maximum value of SAR (measured) = 0.0982 W/kg

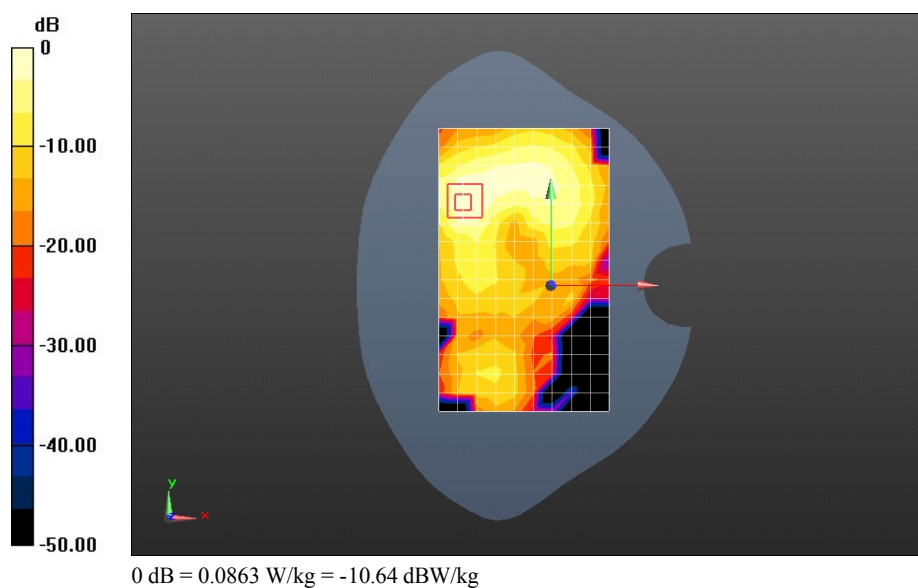

Test Laboratory: HUAWEI SAR/HAC Lab

Che2-L12 WiFi 802.11b 6CH Back side 10mm

DUT: Che2-L12; Type: Smart Phone; Serial: SAR1

Communication System: UID 0, WiFi(802.11a/b/g/n/ac) (0); Frequency: 2437 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 2437$ MHz; $\sigma = 1.916$ S/m; $\epsilon_r = 50.851$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3744; ConvF(6.69, 6.69, 6.69); Calibrated: 2014-7-24;
- Sensor-Surface: 3mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE4 Sn851; Calibrated: 2014-7-24
- Phantom: SAM1; Type: SAM; Serial: TP-1475
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Body/Area Scan (10x16x1): Measurement grid: $dx=12$ mm, $dy=12$ mm

Maximum value of SAR (measured) = 0.263 W/kg


Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 2.138 V/m; Power Drift = 0.17 dB

Peak SAR (extrapolated) = 0.580 W/kg

SAR(1 g) = 0.236 W/kg; SAR(10 g) = 0.100 W/kg

Maximum value of SAR (measured) = 0.331 W/kg

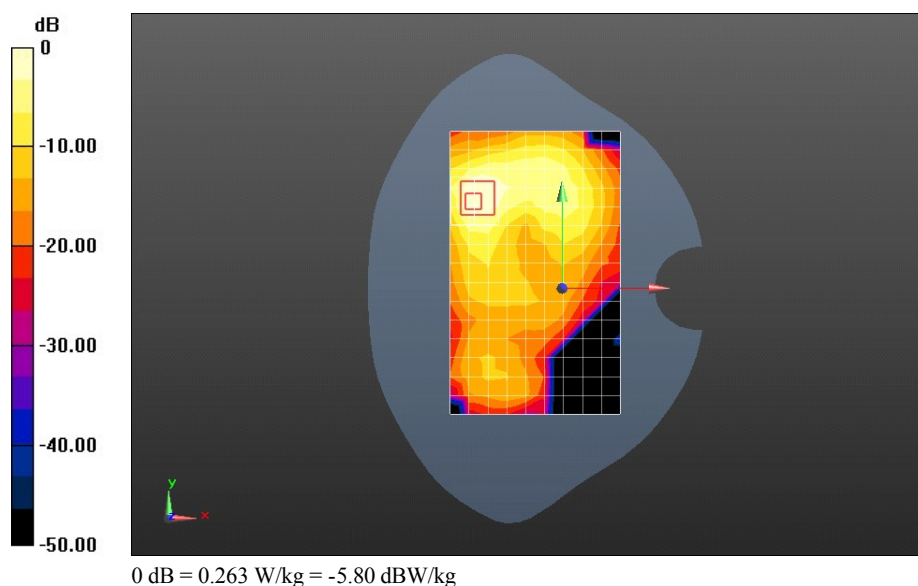

Test Laboratory: HUAWEI SAR/HAC Lab

Che2-L12 WiFi 802.11b 6CH Back side 10mm with battery 2#

DUT: Che2-L12; Type: Smart Phone; Serial: SAR1

Communication System: UID 0, WiFi(802.11a/b/g/n/ac) (0); Frequency: 2437 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 2437$ MHz; $\sigma = 1.916$ S/m; $\epsilon_r = 50.851$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3744; ConvF(6.69, 6.69, 6.69); Calibrated: 2014-7-24;
- Sensor-Surface: 3mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE4 Sn851; Calibrated: 2014-7-24
- Phantom: SAM1; Type: SAM; Serial: TP-1475
- DASY52 52.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Body/Area Scan (10x16x1): Measurement grid: $dx=12$ mm, $dy=12$ mm

Maximum value of SAR (measured) = 0.257 W/kg

Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 1.901 V/m; Power Drift = -0.08 dB

Peak SAR (extrapolated) = 0.518 W/kg

SAR(1 g) = 0.212 W/kg; SAR(10 g) = 0.090 W/kg

Maximum value of SAR (measured) = 0.299 W/kg

