




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM180200138802

Page: 301 of 817

Test mode:	802.11ac(HT20)	Frequency(MHz):	5745	Peak	Horizontal
------------	----------------	-----------------	------	------	------------

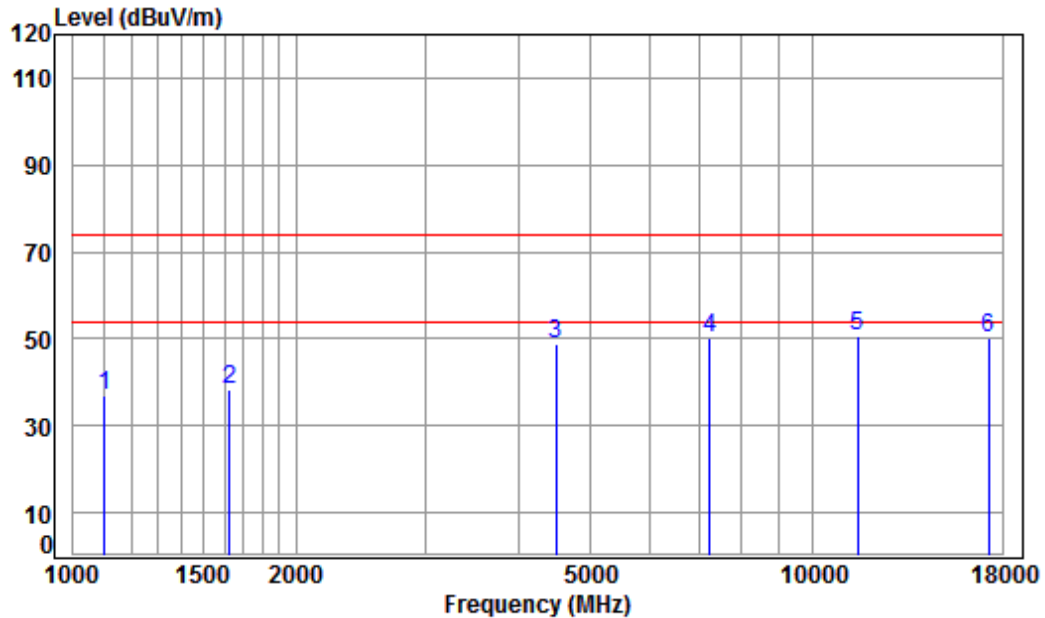

Condition: 3m HORIZONTAL

Job No : 0217RG

Mode : 5745 TX RSE

: Ant 1+2 5G WIFI 11AC CH149

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit	Over	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1103.264	4.02	23.98	38.70	47.61	36.91	74.00	-37.09	peak
2	1625.121	5.32	26.36	38.70	45.44	38.42	74.00	-35.58	peak
3	4495.125	7.55	33.60	38.15	45.72	48.72	74.00	-25.28	peak
4	7242.052	10.07	36.40	38.23	42.09	50.33	74.00	-23.67	peak
5	pp11490.000	12.13	38.09	36.55	37.16	50.83	74.00	-23.17	peak
6	17235.000	16.18	43.08	38.13	28.96	50.09	74.00	-23.91	peak




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM180200138802

Page: 302 of 817

Test mode:	802.11ac(HT20)	Frequency(MHz):	5785	Peak	Vertical
------------	----------------	-----------------	------	------	----------

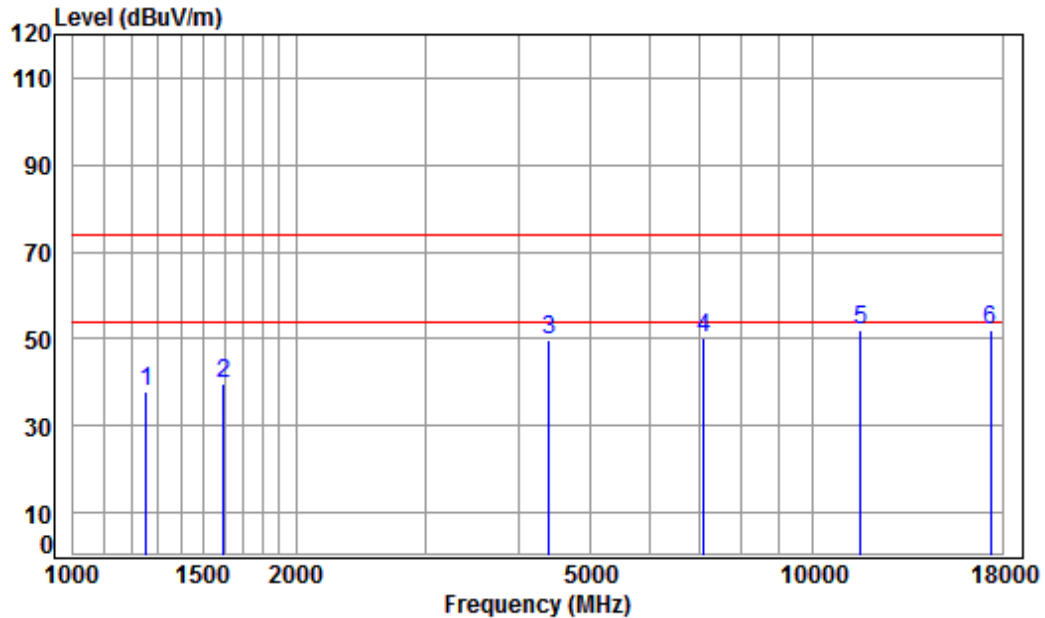

Condition: 3m VERTICAL

Job No : 0217RG

Mode : 5785 TX RSE

: Ant 1+2 5G WIFI 11AC CH157

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit	Over	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1256.512	4.64	24.75	38.70	47.32	38.01	74.00	-35.99	peak
2	1597.181	5.35	26.24	38.70	46.83	39.72	74.00	-34.28	peak
3	4392.376	7.44	33.60	38.14	46.68	49.58	74.00	-24.42	peak
4	7117.542	10.10	36.45	38.21	41.84	50.18	74.00	-23.82	peak
5	pp11570.000	12.17	38.17	36.57	38.12	51.89	74.00	-22.11	peak
6	17355.000	15.92	43.23	38.09	30.81	51.87	74.00	-22.13	peak




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM180200138802

Page: 303 of 817

Test mode:	802.11ac(HT20)	Frequency(MHz):	5785	Peak	Horizontal
------------	----------------	-----------------	------	------	------------

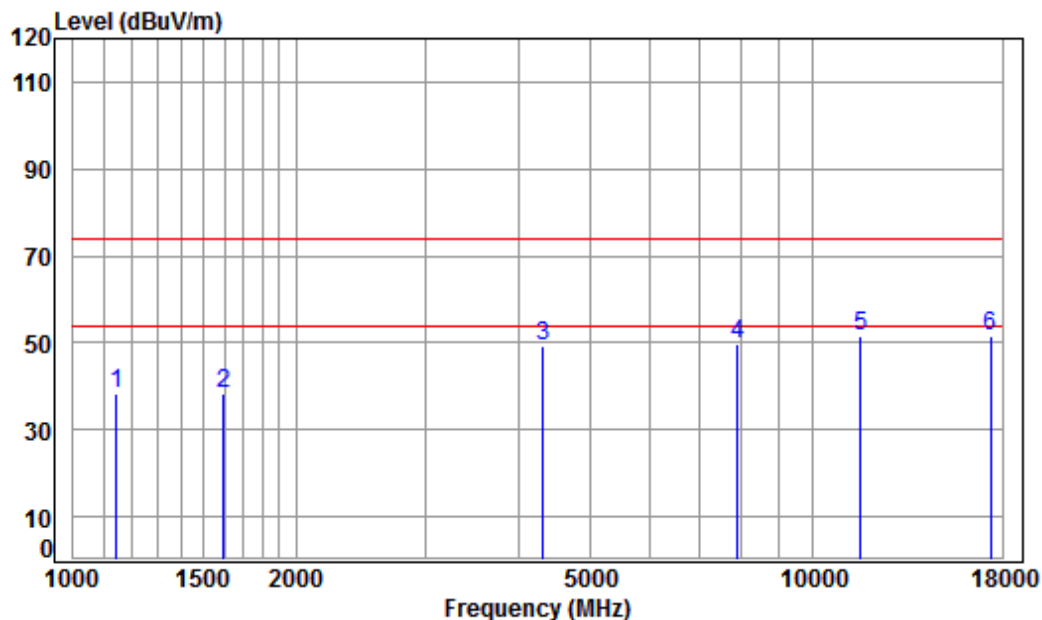

Condition: 3m HORIZONTAL

Job No : 0217RG

Mode : 5785 TX RSE

: Ant 1+2 5G WIFI 11AC CH157

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1145.507	4.20	24.20	38.70	48.43	38.13	74.00	-35.87	peak
2	1597.181	5.35	26.24	38.70	45.64	38.53	74.00	-35.47	peak
3	4316.859	7.36	33.60	38.13	46.23	49.06	74.00	-24.94	peak
4	7898.049	9.96	36.54	38.29	41.65	49.86	74.00	-24.14	peak
5	11570.000	12.17	38.17	36.57	37.64	51.41	74.00	-22.59	peak
6	pp17355.000	15.92	43.23	38.09	30.55	51.61	74.00	-22.39	peak




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM180200138802

Page: 304 of 817

Test mode:	802.11ac(HT20)	Frequency(MHz):	5825	Peak	Vertical
------------	----------------	-----------------	------	------	----------

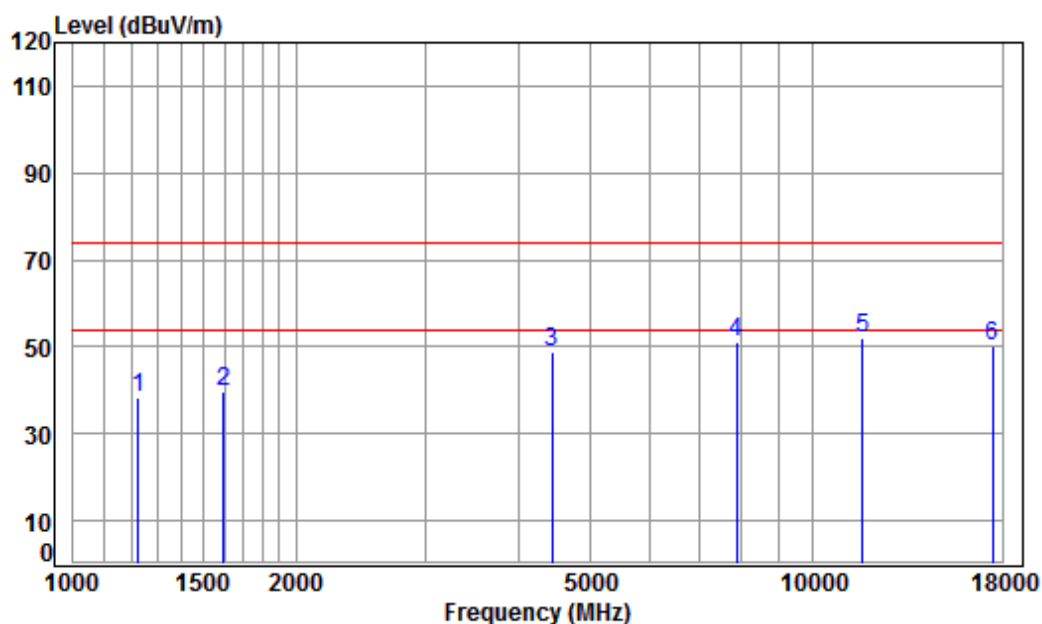

Condition: 3m VERTICAL

Job No : 0217RG

Mode : 5825 TX RSE

: Ant 1+2 5G WIFI 11AC CH165

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1224.247	4.51	24.60	38.70	47.77	38.18	74.00	-35.82	peak
2	1597.181	5.35	26.24	38.70	46.65	39.54	74.00	-34.46	peak
3	4430.628	7.48	33.60	38.15	45.69	48.62	74.00	-25.38	peak
4	7875.254	9.96	36.53	38.29	43.04	51.24	74.00	-22.76	peak
5	pp11650.000	12.20	38.25	36.60	38.26	52.11	74.00	-21.89	peak
6	17475.000	15.65	43.37	38.06	29.19	50.15	74.00	-23.85	peak




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM180200138802

Page: 305 of 817

Test mode:	802.11ac(HT20)	Frequency(MHz):	5825	Peak	Horizontal
------------	----------------	-----------------	------	------	------------

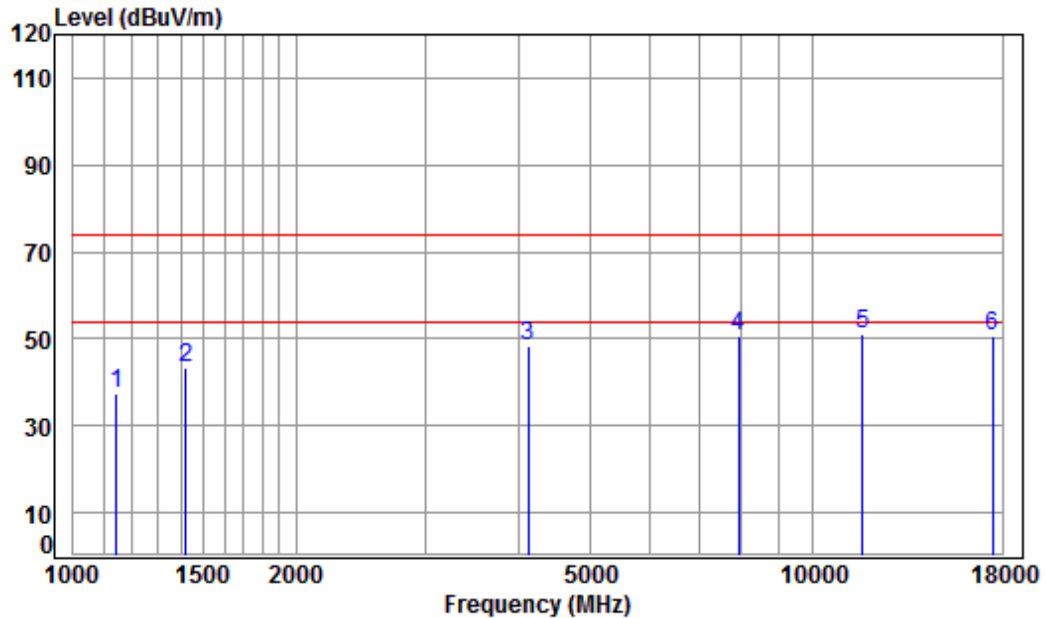

Condition: 3m HORIZONTAL

Job No : 0217RG

Mode : 5825 TX RSE

: Ant 1+2 5G WIFI 11AC CH165

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit	Over	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1145.507	4.20	24.20	38.70	47.62	37.32	74.00	-36.68	peak
2	1418.692	5.21	25.47	38.70	51.26	43.24	74.00	-30.76	peak
3	4121.768	7.13	33.60	38.11	45.91	48.53	74.00	-25.47	peak
4	7920.911	9.96	36.55	38.29	42.29	50.51	74.00	-23.49	peak
5	pp11650.000	12.20	38.25	36.60	37.45	51.30	74.00	-22.70	peak
6	17475.000	15.65	43.37	38.06	29.64	50.60	74.00	-23.40	peak




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM180200138802

Page: 306 of 817

Test mode:	802.11n(HT40)	Frequency(MHz):	5190	Peak	Vertical
------------	---------------	-----------------	------	------	----------

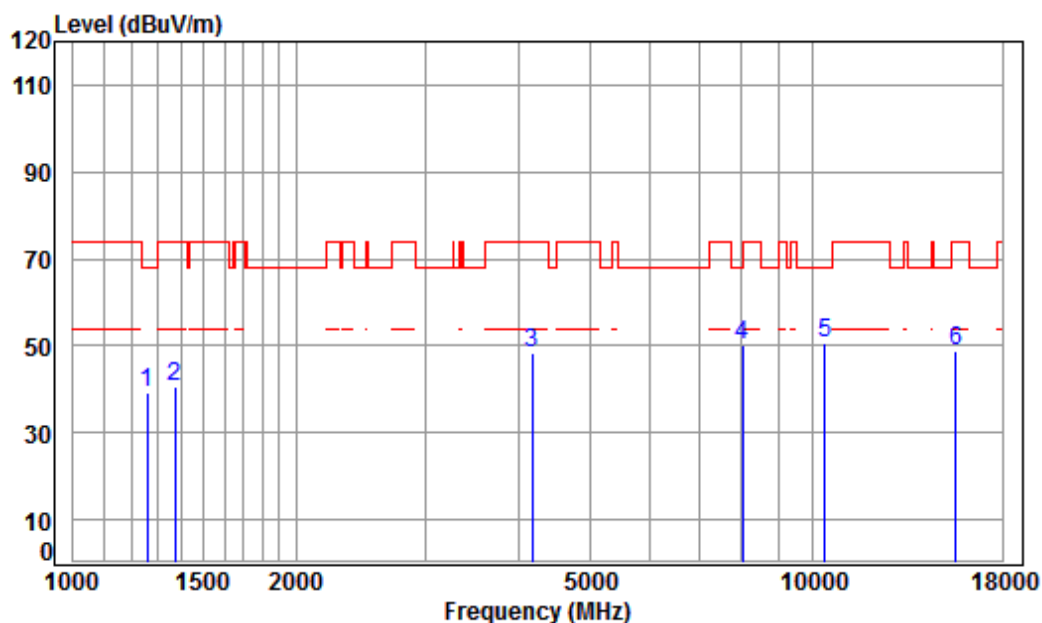

Condition: 3m VERTICAL

Job No : 0217RG

Mode : 5190 TX RSE

: Ant 1+2 5G WIFI 11N(40) CH38

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Limit Level	Over Line	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1	1260.149	4.65	24.77	38.70	48.71	39.43	68.20	-28.77 peak
2	1374.295	5.06	25.28	38.70	48.77	40.41	74.00	-33.59 peak
3	4169.698	7.18	33.60	38.12	45.89	48.55	74.00	-25.45 peak
4	8036.214	9.97	36.56	38.30	41.75	49.98	74.00	-24.02 peak
5	pp10380.000	11.21	37.22	36.34	38.56	50.65	68.20	-17.55 peak
6	15570.000	14.35	41.37	38.10	31.26	48.88	74.00	-25.12 peak




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM180200138802

Page: 307 of 817

Test mode:	802.11n(HT40)	Frequency(MHz):	5190	Peak	Horizontal
------------	---------------	-----------------	------	------	------------

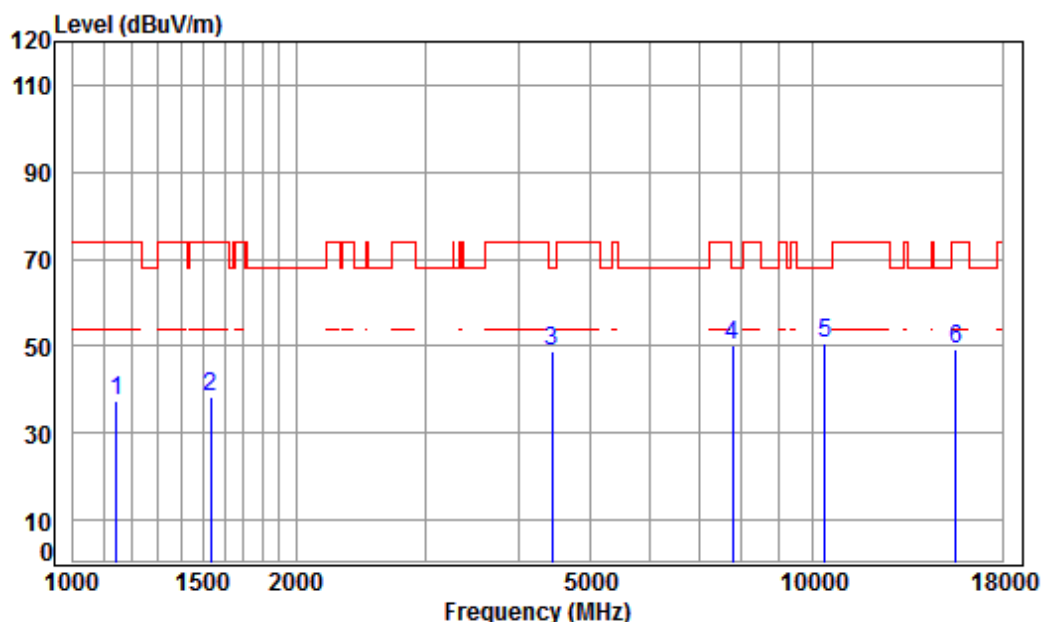

Condition: 3m HORIZONTAL

Job No : 0217RG

Mode : 5190 TX RSE

: Ant 1+2 5G WIFI 11N(40) CH38

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit	Over	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1145.507	4.20	24.20	38.70	47.69	37.39	74.00	-36.61	peak
2	1533.841	5.44	25.96	38.70	45.65	38.35	74.00	-35.65	peak
3	4443.453	7.50	33.60	38.15	46.00	48.95	68.20	-19.25	peak
4	7784.729	9.97	36.47	38.28	42.11	50.27	68.20	-17.93	peak
5	pp10380.000	11.21	37.22	36.34	38.50	50.59	68.20	-17.61	peak
6	15570.000	14.35	41.37	38.10	31.50	49.12	74.00	-24.88	peak




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM180200138802

Page: 308 of 817

Test mode:	802.11n(HT40)	Frequency(MHz):	5230	Peak	Vertical
------------	---------------	-----------------	------	------	----------

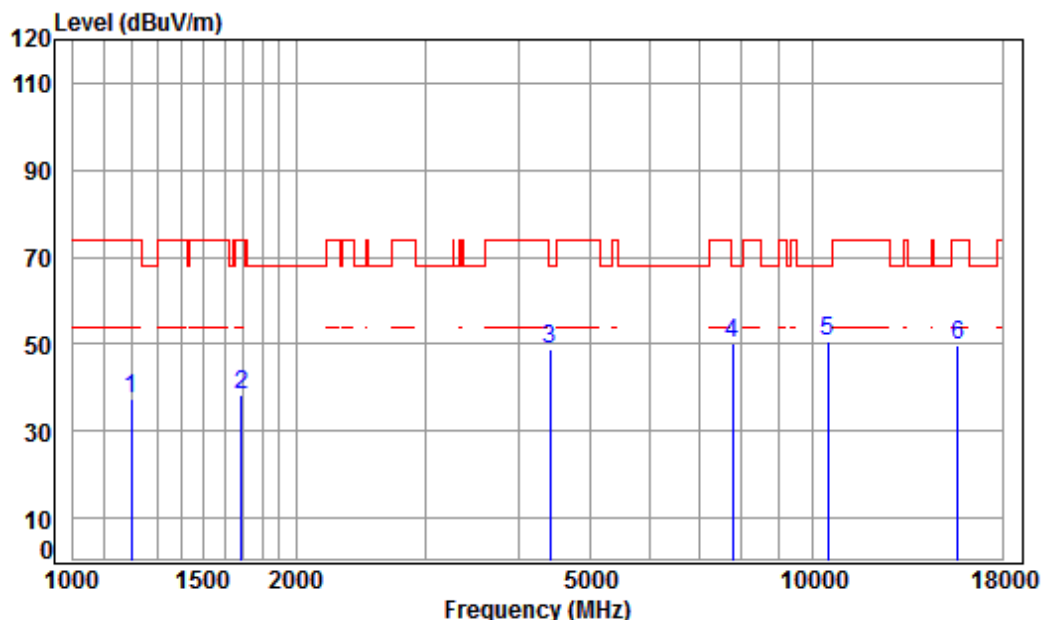

Condition: 3m VERTICAL

Job No : 0217RG

Mode : 5230 TX RSE

: Ant 1+2 5G WIFI 11N(40) CH46

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit	Over	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1199.726	4.42	24.48	38.70	47.32	37.52	74.00	-36.48	peak
2	1687.347	5.24	26.62	38.70	45.03	38.19	74.00	-35.81	peak
3	4405.090	7.46	33.60	38.14	46.02	48.94	68.20	-19.26	peak
4	7784.729	9.97	36.47	38.28	42.02	50.18	68.20	-18.02	peak
5	pp10460.000	11.26	37.14	36.35	38.55	50.60	68.20	-17.60	peak
6	15690.000	14.53	41.32	38.01	32.01	49.85	74.00	-24.15	peak




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM180200138802

Page: 309 of 817

Test mode:	802.11n(HT40)	Frequency(MHz):	5230	Peak	Horizontal
------------	---------------	-----------------	------	------	------------

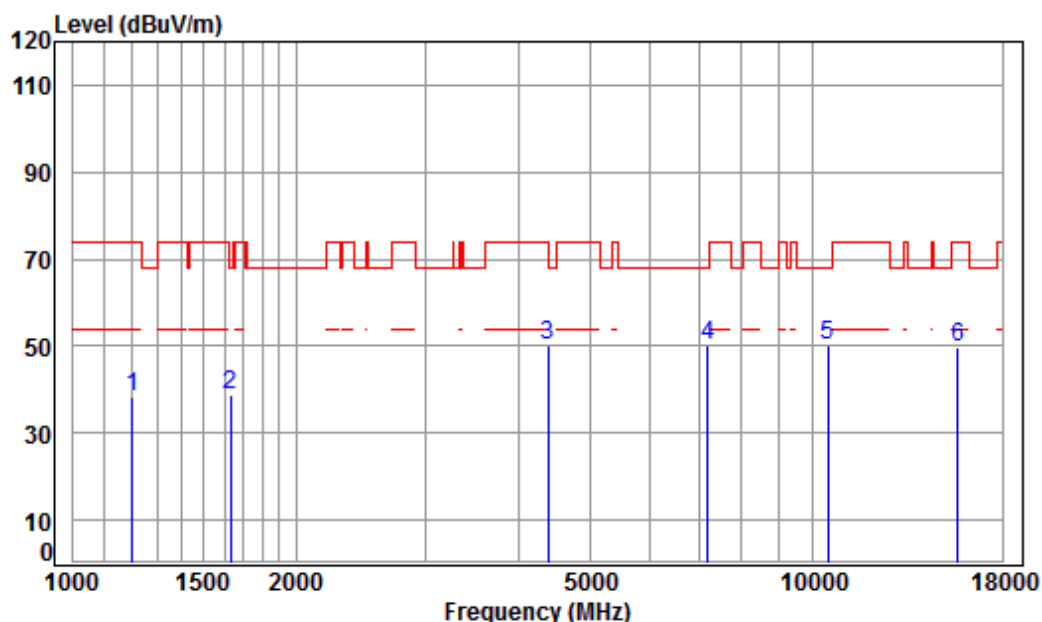

Condition: 3m HORIZONTAL

Job No : 0217RG

Mode : 5230 TX RSE

: Ant 1+2 5G WIFI 11N(40) CH46

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit	Over	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1203.199	4.43	24.49	38.70	48.14	38.36	74.00	-35.64	peak
2	1629.825	5.31	26.38	38.70	45.72	38.71	68.20	-29.49	peak
3	4379.699	7.43	33.60	38.14	47.10	49.99	74.00	-24.01	peak
4 pp	7200.309	10.08	36.42	38.22	42.11	50.39	68.20	-17.81	peak
5	10460.000	11.26	37.14	36.35	38.04	50.09	68.20	-18.11	peak
6	15690.000	14.53	41.32	38.01	32.04	49.88	74.00	-24.12	peak




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM180200138802

Page: 310 of 817

Test mode:	802.11n(HT40)	Frequency(MHz):	5270	Peak	Vertical
------------	---------------	-----------------	------	------	----------

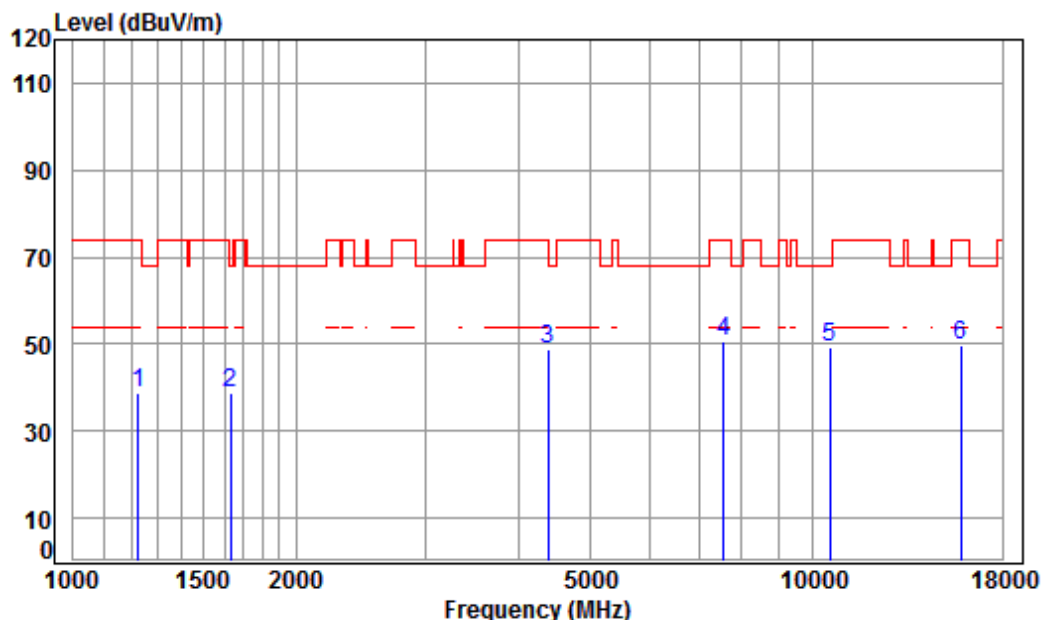

Condition: 3m VERTICAL

Job No : 0217RG

Mode : 5270 TX RSE

: Ant 1+2 5G WIFI 11N(40) CH54

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit	Over	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1224.247	4.51	24.60	38.70	48.38	38.79	74.00	-35.21	peak
2	1629.825	5.31	26.38	38.70	45.95	38.94	68.20	-29.26	peak
3	4379.699	7.43	33.60	38.14	45.94	48.83	74.00	-25.17	peak
4	7562.942	9.99	36.34	38.26	42.71	50.78	74.00	-23.22	peak
5	pp10540.000	11.32	37.15	36.36	37.33	49.44	68.20	-18.76	peak
6	15810.000	14.71	41.28	37.93	31.88	49.94	74.00	-24.06	peak




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM180200138802

Page: 311 of 817

Test mode:	802.11n(HT40)	Frequency(MHz):	5270	Peak	Horizontal
------------	---------------	-----------------	------	------	------------

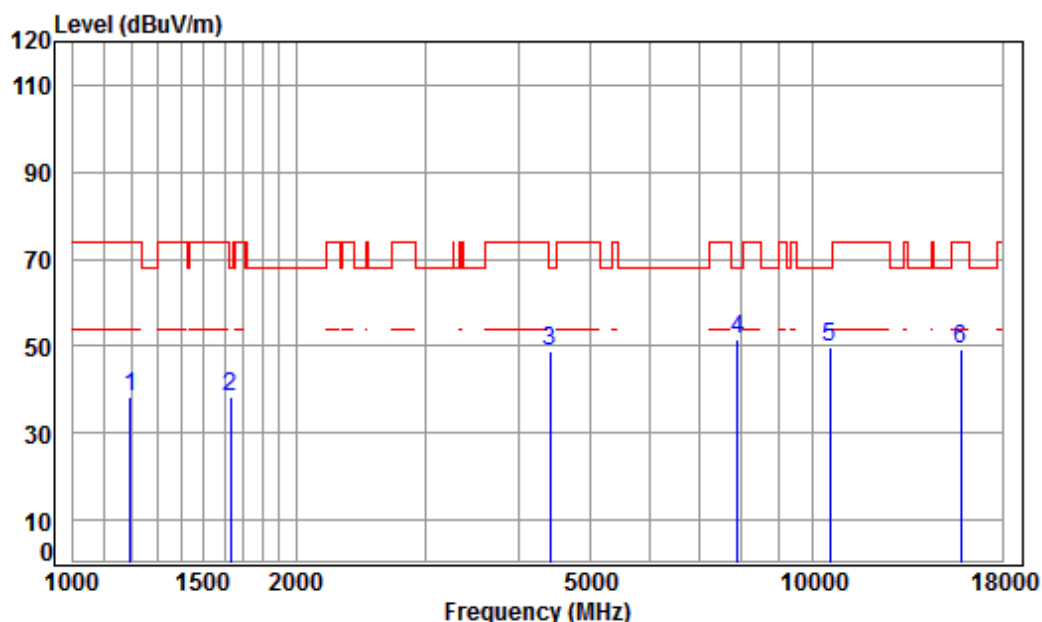

Condition: 3m HORIZONTAL

Job No : 0217RG

Mode : 5270 TX RSE

: Ant 1+2 5G WIFI 11N(40) CH54

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit	Over	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1196.264	4.40	24.46	38.70	48.02	38.18	74.00	-35.82	peak
2	1634.543	5.31	26.40	38.70	45.46	38.47	68.20	-29.73	peak
3	4405.090	7.46	33.60	38.14	45.82	48.74	68.20	-19.46	peak
4 pp	7898.049	9.96	36.54	38.29	43.19	51.40	68.20	-16.80	peak
5	10540.000	11.32	37.15	36.36	37.75	49.86	68.20	-18.34	peak
6	15810.000	14.71	41.28	37.93	31.20	49.26	74.00	-24.74	peak




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM180200138802

Page: 312 of 817

Test mode:	802.11n(HT40)	Frequency(MHz):	5310	Peak	Vertical
------------	---------------	-----------------	------	------	----------

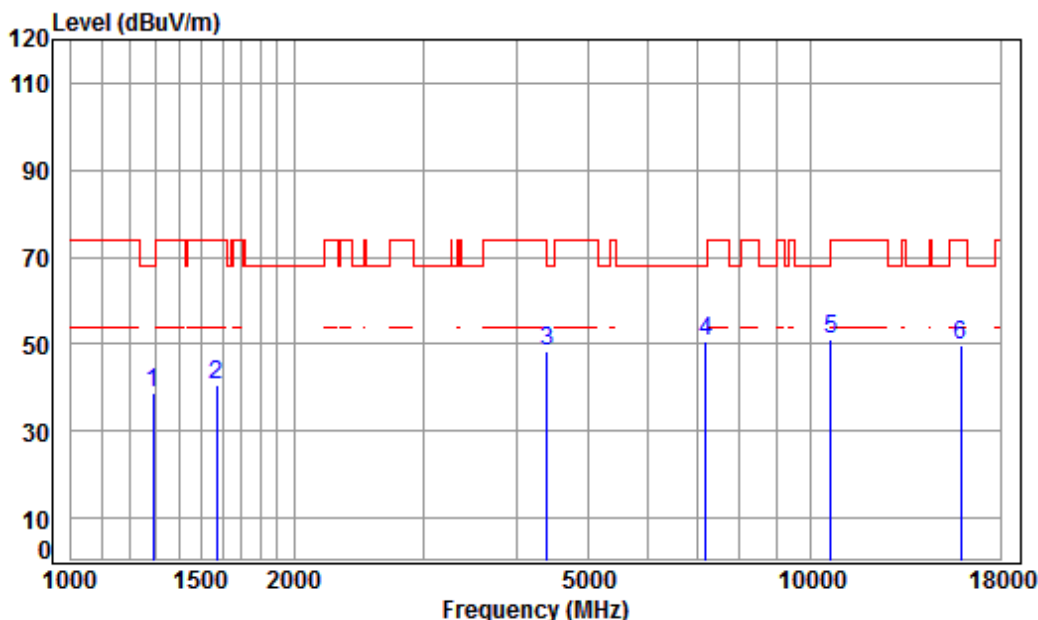

Condition: 3m VERTICAL

Job No : 0217RG

Mode : 5310 TX RSE

: Ant 1+2 5G WIFI 11N(40) CH62

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit	Over	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1289.627	4.76	24.91	38.70	47.89	38.86	68.20	-29.34	peak
2	1574.265	5.38	26.14	38.70	47.65	40.47	74.00	-33.53	peak
3	4392.376	7.44	33.60	38.14	45.55	48.45	74.00	-25.55	peak
4	pp 7200.309	10.08	36.42	38.22	42.49	50.77	68.20	-17.43	peak
5	10620.000	11.37	37.25	36.36	38.65	50.91	74.00	-23.09	peak
6	15930.000	14.89	41.23	37.85	31.36	49.63	74.00	-24.37	peak




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM180200138802

Page: 313 of 817

Test mode:	802.11n(HT40)	Frequency(MHz):	5310	Peak	Horizontal
------------	---------------	-----------------	------	------	------------

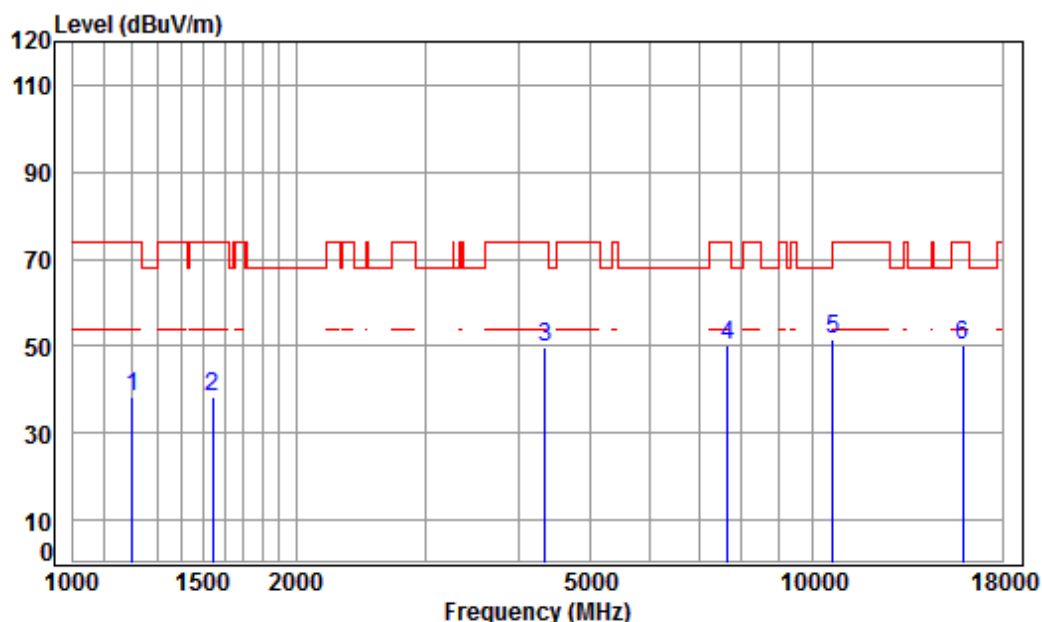

Condition: 3m HORIZONTAL

Job No : 0217RG

Mode : 5310 TX RSE

: Ant 1+2 5G WIFI 11N(40) CH62

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit	Over	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1203.199	4.43	24.49	38.70	48.23	38.45	74.00	-35.55	peak
2	1542.733	5.42	26.00	38.70	45.45	38.17	74.00	-35.83	peak
3	4341.886	7.38	33.60	38.14	46.98	49.82	74.00	-24.18	peak
4	7673.034	9.98	36.41	38.27	41.91	50.03	74.00	-23.97	peak
5	pp10620.000	11.37	37.25	36.36	39.29	51.55	74.00	-22.45	peak
6	15930.000	14.89	41.23	37.85	31.71	49.98	74.00	-24.02	peak




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM180200138802

Page: 314 of 817

Test mode:	802.11n(HT40)	Frequency(MHz):	5510	Peak	Vertical
------------	---------------	-----------------	------	------	----------

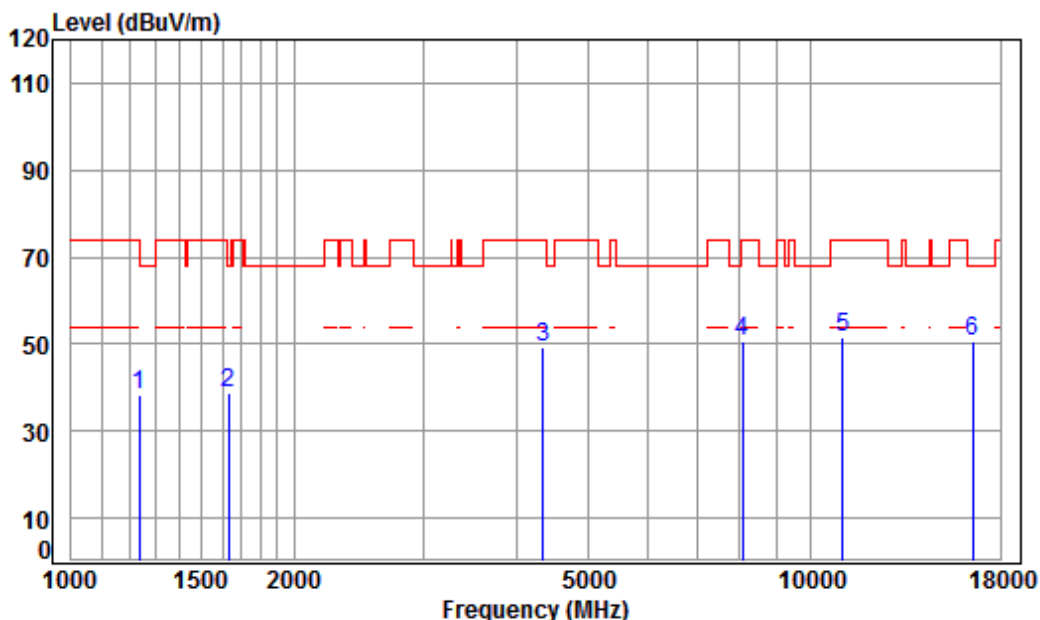

Condition: 3m VERTICAL

Job No : 0217RG

Mode : 5510 TX RSE

: Ant 1+2 5G WIFI 11N(40) CH102

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit	Over	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1234.909	4.55	24.65	38.70	47.95	38.45	74.00	-35.55	peak
2	1634.543	5.31	26.40	38.70	45.68	38.69	68.20	-29.51	peak
3	4341.886	7.38	33.60	38.14	46.48	49.32	74.00	-24.68	peak
4	8082.804	10.00	36.50	38.29	42.65	50.86	74.00	-23.14	peak
5	11020.000	11.65	37.72	36.41	38.59	51.55	74.00	-22.45	peak
6	pp16530.000	14.63	42.71	38.02	31.22	50.54	68.20	-17.66	peak




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM180200138802

Page: 315 of 817

Test mode:	802.11n(HT40)	Frequency(MHz):	5510	Peak	Horizontal
------------	---------------	-----------------	------	------	------------

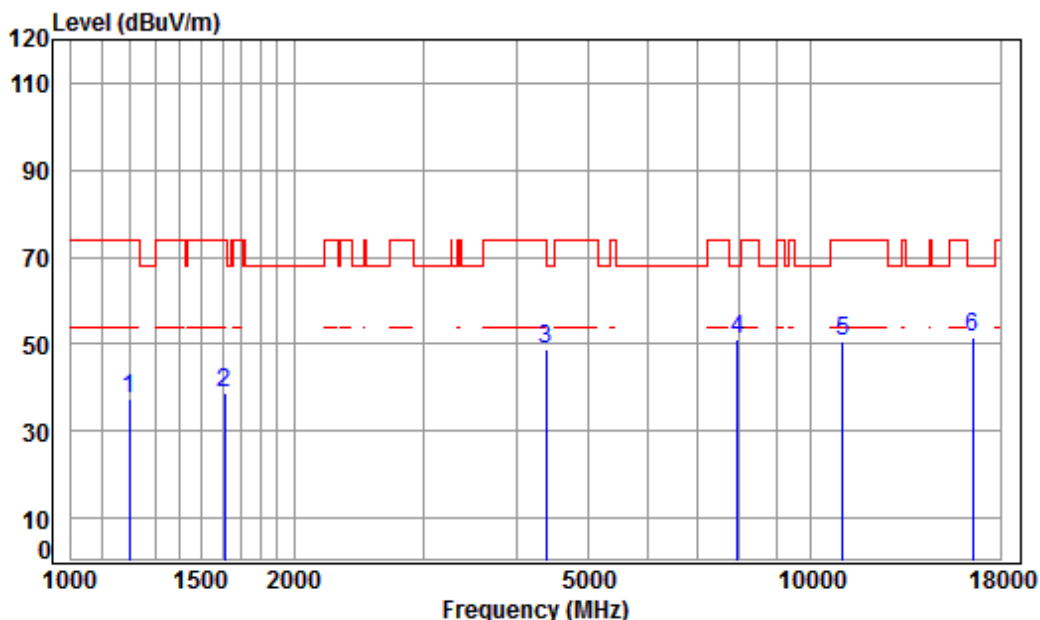

Condition: 3m HORIZONTAL

Job No : 0217RG

Mode : 5510 TX RSE

: Ant 1+2 5G WIFI 11N(40) CH102

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Limit Level	Over Line	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1	1199.726	4.42	24.48	38.70	47.19	37.39	74.00	-36.61 peak
2	1611.091	5.34	26.30	38.70	45.90	38.84	74.00	-35.16 peak
3	4379.699	7.43	33.60	38.14	45.96	48.85	74.00	-25.15 peak
4	7943.838	9.96	36.57	38.29	43.09	51.33	68.20	-16.87 peak
5	11020.000	11.65	37.72	36.41	37.67	50.63	74.00	-23.37 peak
6	pp16530.000	14.63	42.71	38.02	32.03	51.35	68.20	-16.85 peak




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM180200138802

Page: 316 of 817

Test mode:	802.11n(HT40)	Frequency(MHz):	5550	Peak	Vertical
------------	---------------	-----------------	------	------	----------

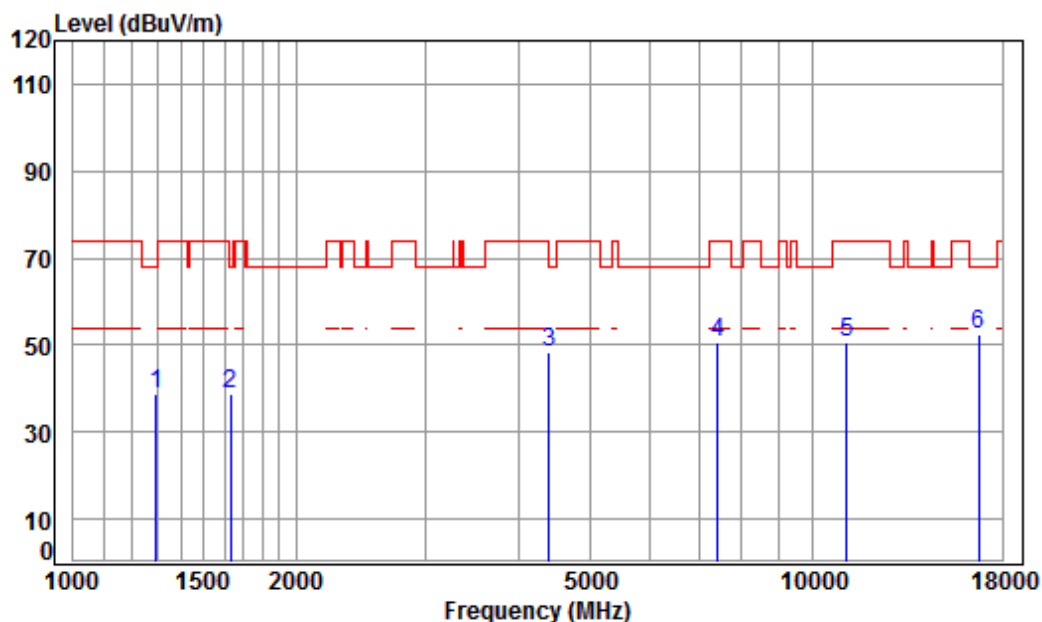

Condition: 3m VERTICAL

Job No : 0217RG

Mode : 5550 TX RSE

: Ant 1+2 5G WIFI 11N(40) CH110

		Cable	Ant	Preamp	Read	Limit	Over	
	Freq	Loss	Factor	Factor	Level	Level	Line	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1	1293.359	4.77	24.92	38.70	47.80	38.79	68.20	-29.41 peak
2	1634.543	5.31	26.40	38.70	45.56	38.57	68.20	-29.63 peak
3	4392.376	7.44	33.60	38.14	45.61	48.51	74.00	-25.49 peak
4	7432.914	10.02	36.33	38.24	42.49	50.60	74.00	-23.40 peak
5	11100.000	11.73	37.78	36.43	37.66	50.74	74.00	-23.26 peak
6	pp16740.000	15.57	42.75	38.10	32.27	52.49	68.20	-15.71 peak




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM180200138802

Page: 317 of 817

Test mode:	802.11n(HT40)	Frequency(MHz):	5550	Peak	Horizontal
------------	---------------	-----------------	------	------	------------

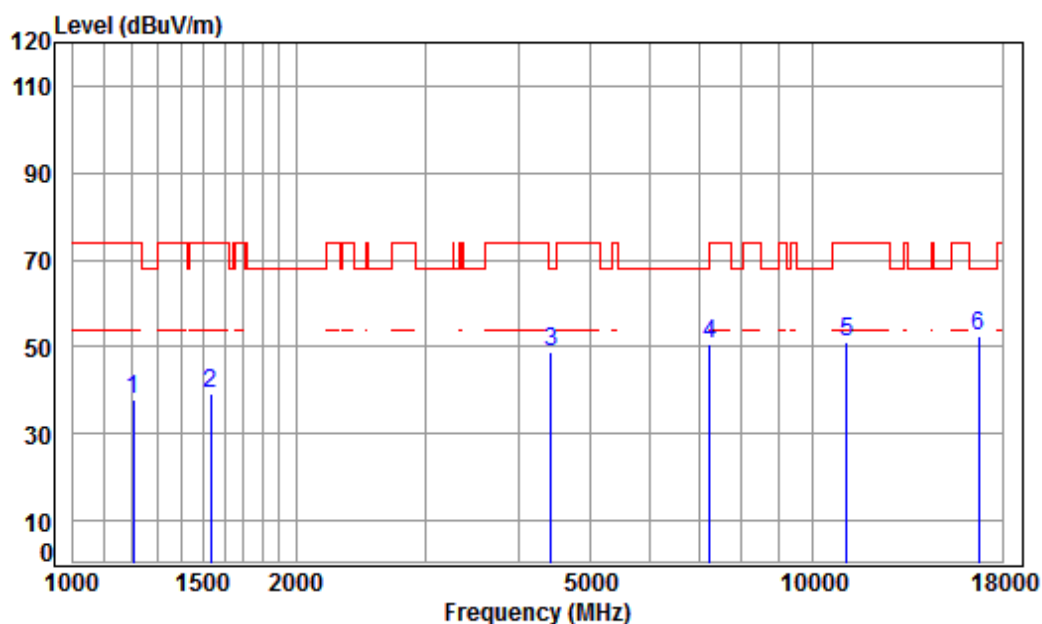

Condition: 3m HORIZONTAL

Job No : 0217RG

Mode : 5550 TX RSE

: Ant 1+2 5G WIFI 11N(40) CH110

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit	Over	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1206.682	4.44	24.51	38.70	47.72	37.97	74.00	-36.03	peak
2	1533.841	5.44	25.96	38.70	46.55	39.25	74.00	-34.75	peak
3	4417.841	7.47	33.60	38.14	46.01	48.94	68.20	-19.26	peak
4	7242.052	10.07	36.40	38.23	42.25	50.49	68.20	-17.71	peak
5	11100.000	11.73	37.78	36.43	38.08	51.16	74.00	-22.84	peak
6	pp16740.000	15.57	42.75	38.10	32.23	52.45	68.20	-15.75	peak




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM180200138802

Page: 318 of 817

Test mode:	802.11n(HT40)	Frequency(MHz):	5670	Peak	Vertical
------------	---------------	-----------------	------	------	----------

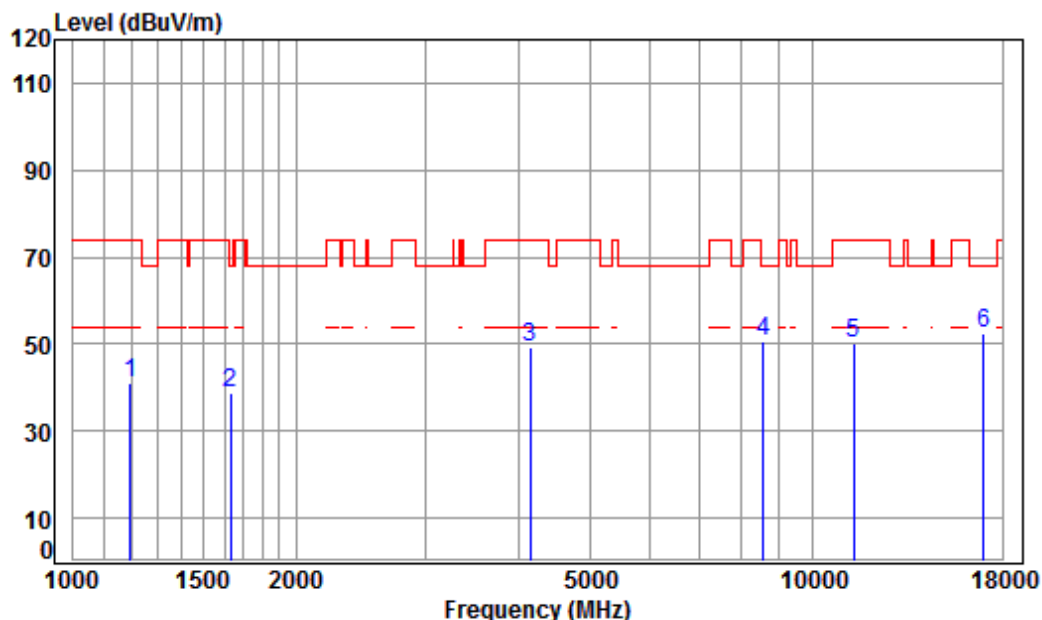

Condition: 3m VERTICAL

Job No : 0217RG

Mode : 5670 TX RSE

: Ant 1+2 5G WIFI 11N(40) CH134

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Limit Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1196.264	4.40	24.46	38.70	50.85	41.01	74.00	-32.99	peak
2	1634.543	5.31	26.40	38.70	45.79	38.80	68.20	-29.40	peak
3	4145.664	7.16	33.60	38.12	46.84	49.48	74.00	-24.52	peak
4	8563.818	10.29	36.08	38.24	42.57	50.70	68.20	-17.50	peak
5	11340.000	11.98	37.97	36.50	36.76	50.21	74.00	-23.79	peak
6	pp17010.000	16.69	42.81	38.20	31.24	52.54	68.20	-15.66	peak




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM180200138802

Page: 319 of 817

Test mode:	802.11n(HT40)	Frequency(MHz):	5670	Peak	Horizontal
------------	---------------	-----------------	------	------	------------

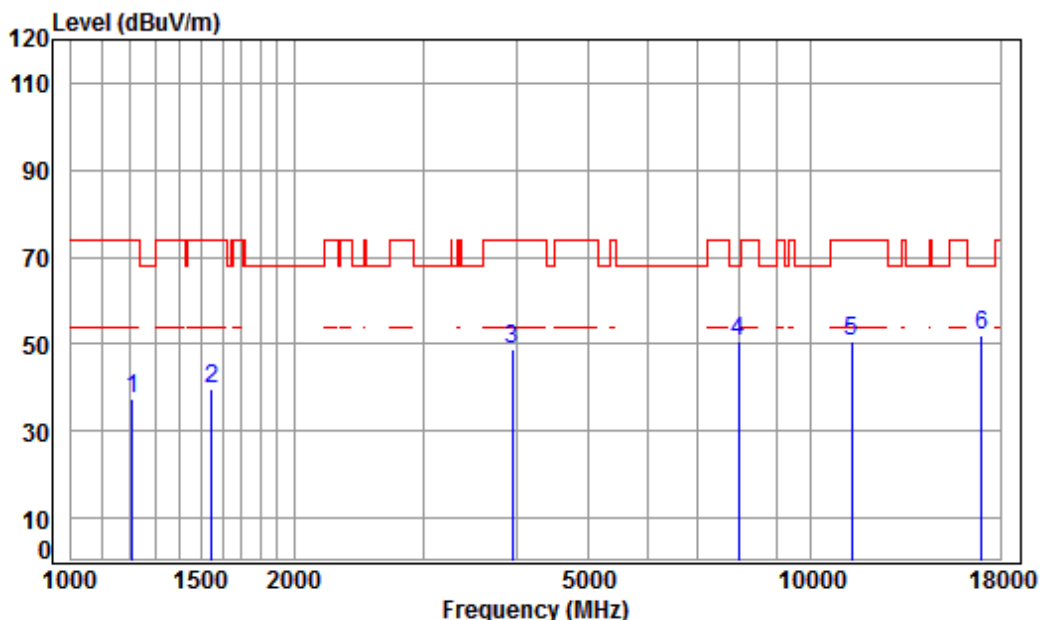

Condition: 3m HORIZONTAL

Job No : 0217RG

Mode : 5670 TX RSE

: Ant 1+2 5G WIFI 11N(40) CH134

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit	Over	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1210.174	4.46	24.53	38.70	47.04	37.33	74.00	-36.67	peak
2	1547.199	5.42	26.02	38.70	46.90	39.64	74.00	-34.36	peak
3	3946.885	6.93	33.46	38.09	46.39	48.69	74.00	-25.31	peak
4	7966.832	9.95	36.58	38.30	42.57	50.80	68.20	-17.40	peak
5	11340.000	11.98	37.97	36.50	37.33	50.78	74.00	-23.22	peak
6	pp17010.000	16.69	42.81	38.20	30.86	52.16	68.20	-16.04	peak




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM180200138802

Page: 320 of 817

Test mode:	802.11n(HT40)	Frequency(MHz):	5755	Peak	Vertical
------------	---------------	-----------------	------	------	----------

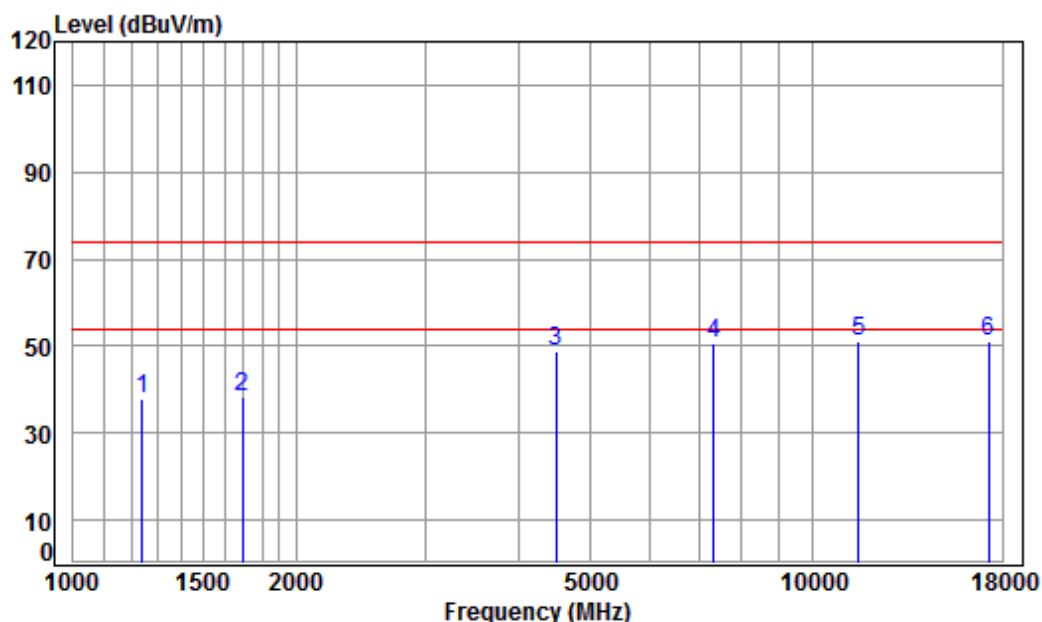

Condition: 3m VERTICAL

Job No : 0217RG

Mode : 5755 TX RSE

: Ant 1+2 5G WIFI 11N(40) CH151

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit	Over	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1238.483	4.57	24.67	38.70	47.30	37.84	74.00	-36.16	peak
2	1692.231	5.24	26.64	38.70	45.36	38.54	74.00	-35.46	peak
3	4495.125	7.55	33.60	38.15	45.78	48.78	74.00	-25.22	peak
4	7347.474	10.04	36.36	38.24	42.28	50.44	74.00	-23.56	peak
5	pp11510.000	12.14	38.11	36.56	37.52	51.21	74.00	-22.79	peak
6	17265.000	16.12	43.12	38.12	30.07	51.19	74.00	-22.81	peak




SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch

Report No.: SZEM180200138802

Page: 321 of 817

Test mode:	802.11n(HT40)	Frequency(MHz):	5755	Peak	Horizontal
------------	---------------	-----------------	------	------	------------

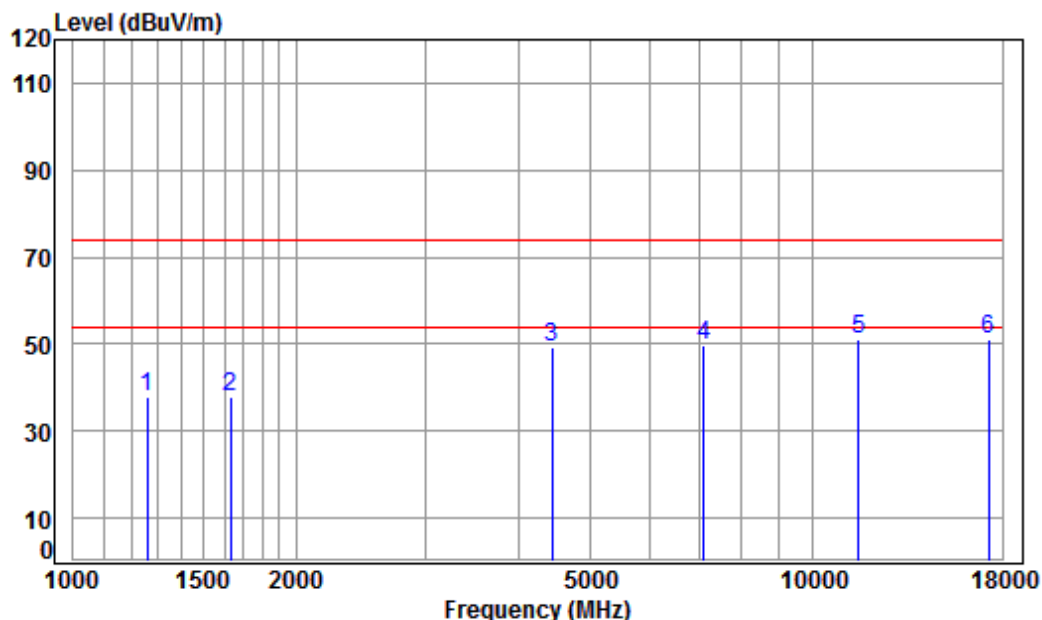

Condition: 3m HORIZONTAL

Job No : 0217RG

Mode : 5755 TX RSE

: Ant 1+2 5G WIFI 11N(40) CH151

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1260.149	4.65	24.77	38.70	47.21	37.93	74.00	-36.07	peak
2	1634.543	5.31	26.40	38.70	45.03	38.04	74.00	-35.96	peak
3	4430.628	7.48	33.60	38.15	46.13	49.06	74.00	-24.94	peak
4	7117.542	10.10	36.45	38.21	41.56	49.90	74.00	-24.10	peak
5	11510.000	12.14	38.11	36.56	37.54	51.23	74.00	-22.77	peak
6	pp17265.000	16.12	43.12	38.12	30.16	51.28	74.00	-22.72	peak




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM180200138802

Page: 322 of 817

Test mode:	802.11n(HT40)	Frequency(MHz):	5795	Peak	Vertical
------------	---------------	-----------------	------	------	----------

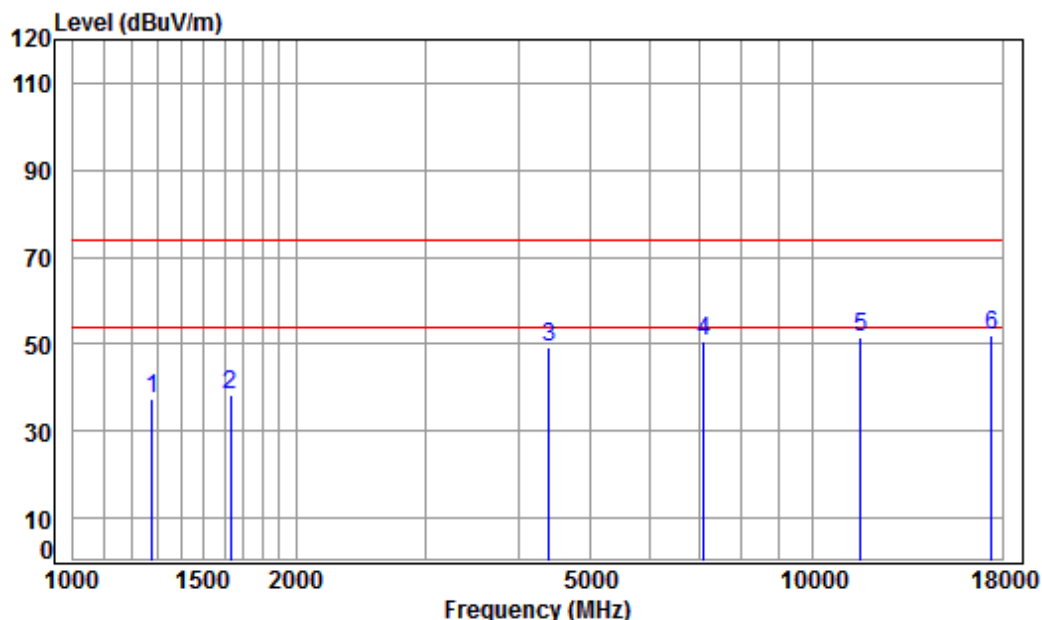

Condition: 3m VERTICAL

Job No : 0217RG

Mode : 5795 TX RSE

: Ant 1+2 5G WIFI 11N(40) CH159

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit	Over	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1278.492	4.72	24.85	38.70	46.44	37.31	74.00	-36.69	peak
2	1634.543	5.31	26.40	38.70	45.44	38.45	74.00	-35.55	peak
3	4392.376	7.44	33.60	38.14	46.18	49.08	74.00	-24.92	peak
4	7117.542	10.10	36.45	38.21	42.10	50.44	74.00	-23.56	peak
5	11590.000	12.17	38.19	36.58	37.85	51.63	74.00	-22.37	peak
6	pp17385.000	15.85	43.26	38.08	31.06	52.09	74.00	-21.91	peak




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM180200138802

Page: 323 of 817

Test mode:	802.11n(HT40)	Frequency(MHz):	5795	Peak	Horizontal
------------	---------------	-----------------	------	------	------------

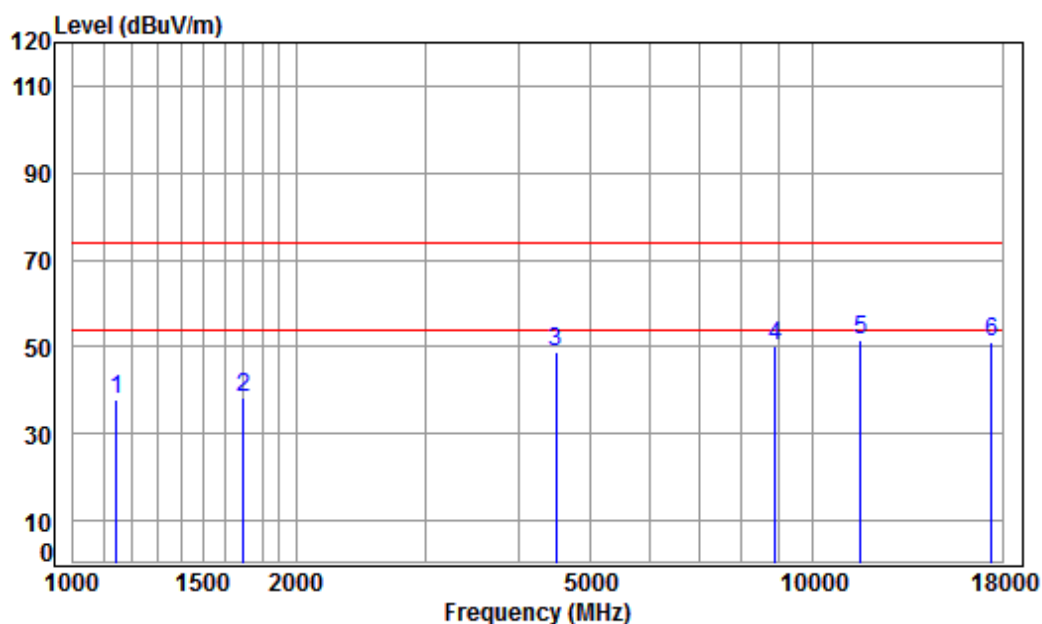

Condition: 3m HORIZONTAL

Job No : 0217RG

Mode : 5795 TX RSE

: Ant 1+2 5G WIFI 11N(40) CH159

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Limit Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1145.507	4.20	24.20	38.70	48.28	37.98	74.00	-36.02	peak
2	1697.129	5.23	26.66	38.70	45.04	38.23	74.00	-35.77	peak
3	4495.125	7.55	33.60	38.15	45.68	48.68	74.00	-25.32	peak
4	8891.725	10.37	36.47	38.21	41.35	49.98	74.00	-24.02	peak
5	11590.000	12.17	38.19	36.58	37.94	51.72	74.00	-22.28	peak
6	17385.000	15.85	43.26	38.08	29.85	50.88	74.00	-23.12	peak




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM180200138802

Page: 324 of 817

Test mode:	802.11ac(HT40)	Frequency(MHz):	5190	Peak	Vertical
------------	----------------	-----------------	------	------	----------

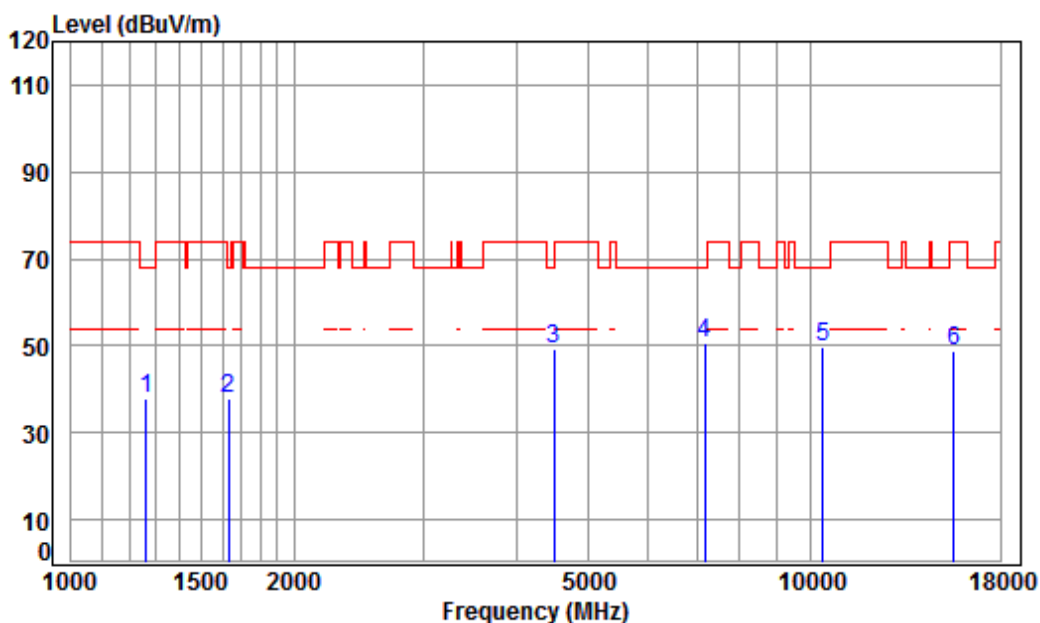

Condition: 3m VERTICAL

Job No : 0217RG

Mode : 5190 TX RSE

: Ant 1+2 5G WIFI 11AC(40) CH38

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Limit Level	Over Line	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1	1263.796	4.66	24.79	38.70	47.28	38.03	68.20	-30.17 peak
2	1634.543	5.31	26.40	38.70	44.99	38.00	68.20	-30.20 peak
3	4495.125	7.55	33.60	38.15	46.22	49.22	68.20	-18.98 peak
4 pp	7179.527	10.08	36.43	38.22	42.17	50.46	68.20	-17.74 peak
5	10380.000	11.21	37.22	36.34	37.53	49.62	68.20	-18.58 peak
6	15570.000	14.35	41.37	38.10	31.11	48.73	74.00	-25.27 peak




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM180200138802

Page: 325 of 817

Test mode:	802.11ac(HT40)	Frequency(MHz):	5190	Peak	Horizontal
------------	----------------	-----------------	------	------	------------

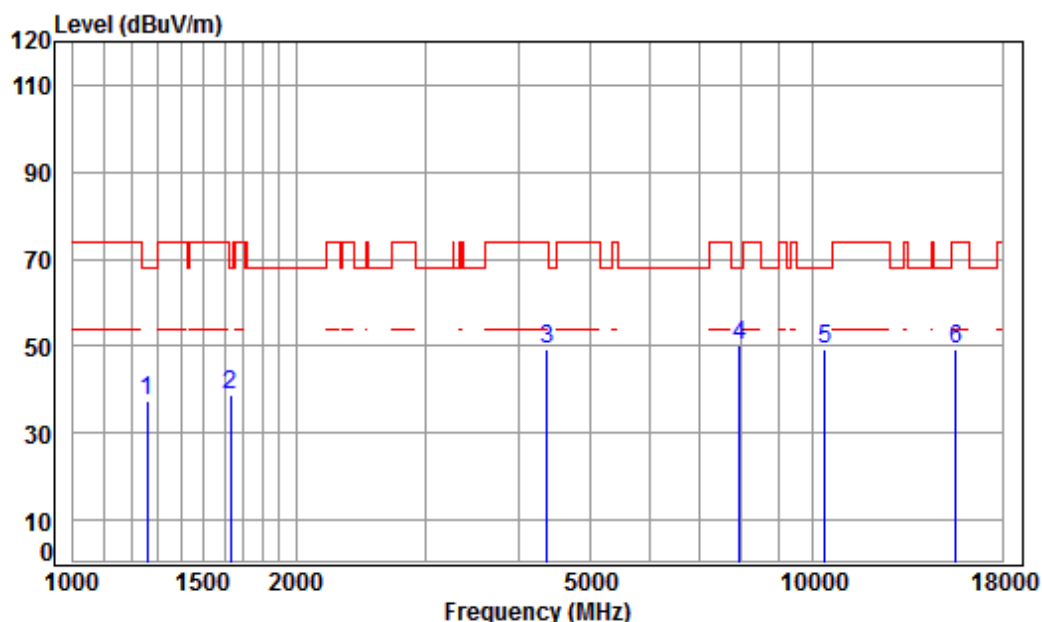

Condition: 3m HORIZONTAL

Job No : 0217RG

Mode : 5190 TX RSE

: Ant 1+2 5G WIFI 11AC(40) CH38

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Limit Level	Over Line	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1	1260.149	4.65	24.77	38.70	46.67	37.39	68.20	-30.81 peak
2	1634.543	5.31	26.40	38.70	45.77	38.78	68.20	-29.42 peak
3	4367.058	7.41	33.60	38.14	46.21	49.08	74.00	-24.92 peak
4 pp	7943.838	9.96	36.57	38.29	41.84	50.08	68.20	-18.12 peak
5	10380.000	11.21	37.22	36.34	37.38	49.47	68.20	-18.73 peak
6	15570.000	14.35	41.37	38.10	31.47	49.09	74.00	-24.91 peak




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM180200138802

Page: 326 of 817

Test mode:	802.11ac(HT40)	Frequency(MHz):	5230	Peak	Vertical
------------	----------------	-----------------	------	------	----------

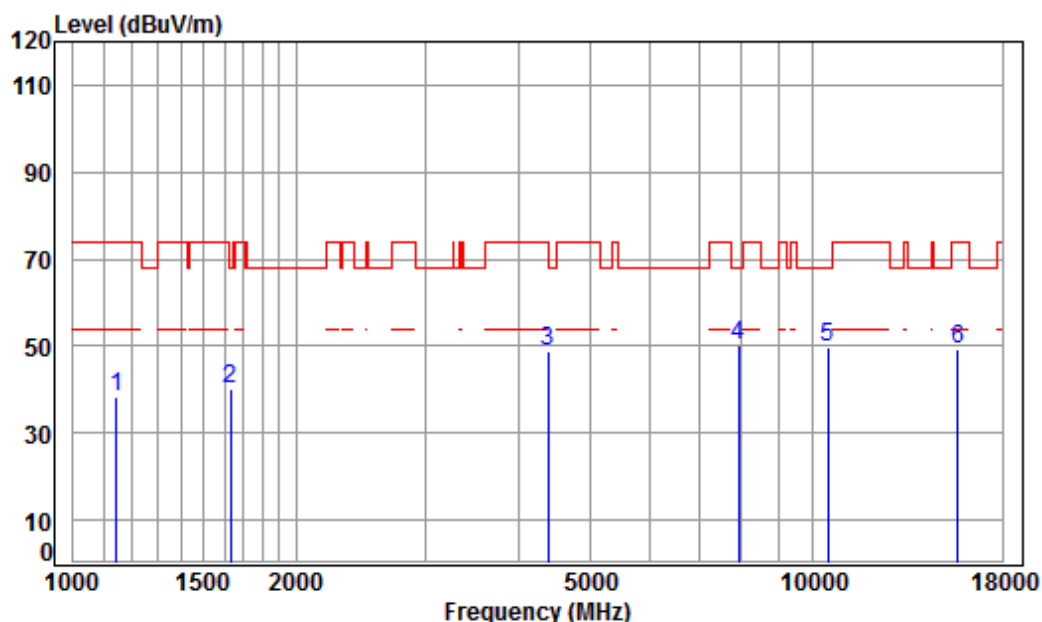

Condition: 3m VERTICAL

Job No : 0217RG

Mode : 5230 TX RSE

: Ant 1+2 5G WIFI 11AC(40) CH46

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit	Over	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1145.507	4.20	24.20	38.70	48.56	38.26	74.00	-35.74	peak
2	1634.543	5.31	26.40	38.70	47.03	40.04	68.20	-28.16	peak
3	4379.699	7.43	33.60	38.14	45.82	48.71	74.00	-25.29	peak
4 pp	7920.911	9.96	36.55	38.29	41.80	50.02	68.20	-18.18	peak
5	10460.000	11.26	37.14	36.35	37.70	49.75	68.20	-18.45	peak
6	15690.000	14.53	41.32	38.01	31.28	49.12	74.00	-24.88	peak




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM180200138802

Page: 327 of 817

Test mode:	802.11ac(HT40)	Frequency(MHz):	5230	Peak	Horizontal
------------	----------------	-----------------	------	------	------------

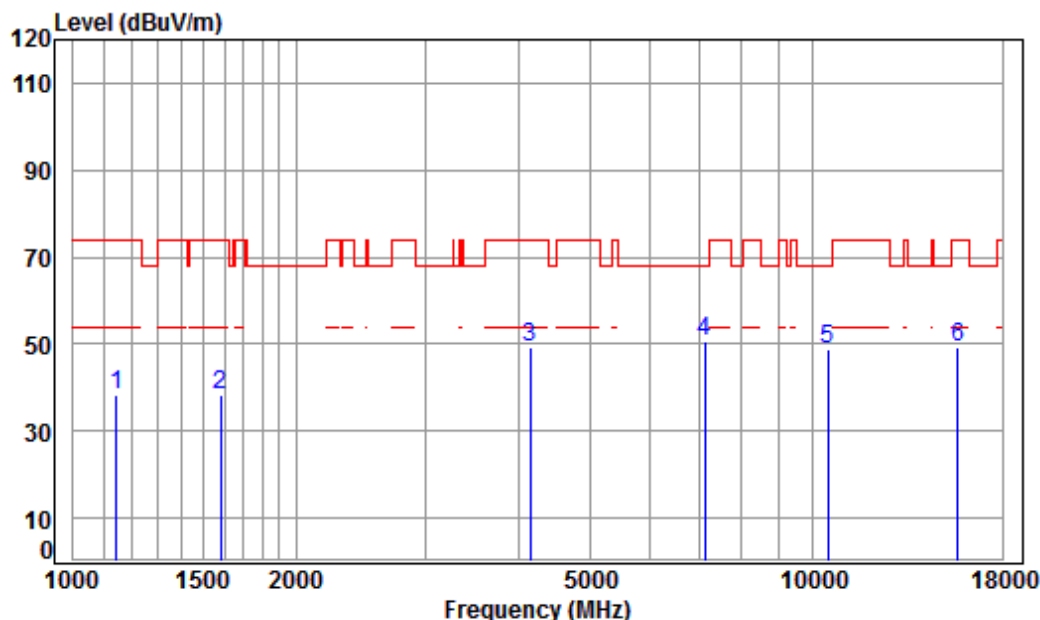

Condition: 3m HORIZONTAL

Job No : 0217RG

Mode : 5230 TX RSE

: Ant 1+2 5G WIFI 11AC(40) CH46

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit	Over	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1145.507	4.20	24.20	38.70	48.68	38.38	74.00	-35.62	peak
2	1583.392	5.37	26.18	38.70	45.28	38.13	74.00	-35.87	peak
3	4145.664	7.16	33.60	38.12	46.70	49.34	74.00	-24.66	peak
4 pp	7138.144	10.09	36.44	38.21	42.46	50.78	68.20	-17.42	peak
5	10460.000	11.26	37.14	36.35	36.90	48.95	68.20	-19.25	peak
6	15690.000	14.53	41.32	38.01	31.56	49.40	74.00	-24.60	peak




SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch

Report No.: SZEM180200138802

Page: 328 of 817

Test mode:	802.11ac(HT40)	Frequency(MHz):	5270	Peak	Vertical
------------	----------------	-----------------	------	------	----------

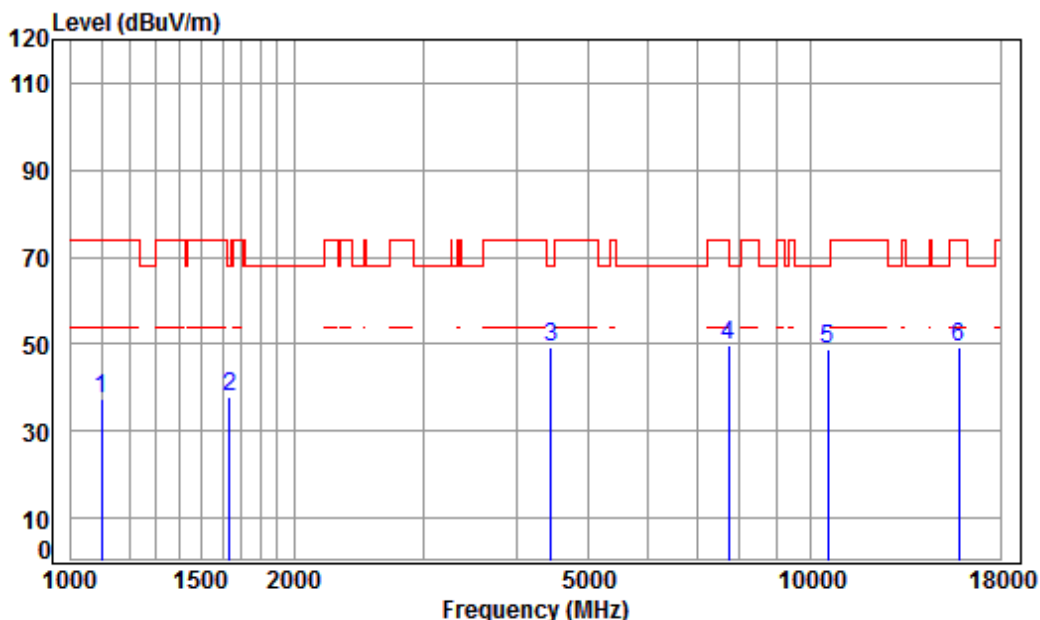

Condition: 3m VERTICAL

Job No : 0217RG

Mode : 5270 TX RSE

: Ant 1+2 5G WIFI 11AC(40) CH54

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit	Over	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1100.079	4.00	23.96	38.70	47.94	37.20	74.00	-36.80	peak
2	1639.274	5.30	26.42	38.70	44.78	37.80	68.20	-30.40	peak
3 pp	4456.315	7.51	33.60	38.15	46.20	49.16	68.20	-19.04	peak
4	7739.857	9.98	36.45	38.28	41.69	49.84	74.00	-24.16	peak
5	10540.000	11.32	37.15	36.36	36.74	48.85	68.20	-19.35	peak
6	15810.000	14.71	41.28	37.93	31.39	49.45	74.00	-24.55	peak




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM180200138802

Page: 329 of 817

Test mode:	802.11ac(HT40)	Frequency(MHz):	5270	Peak	Horizontal
------------	----------------	-----------------	------	------	------------

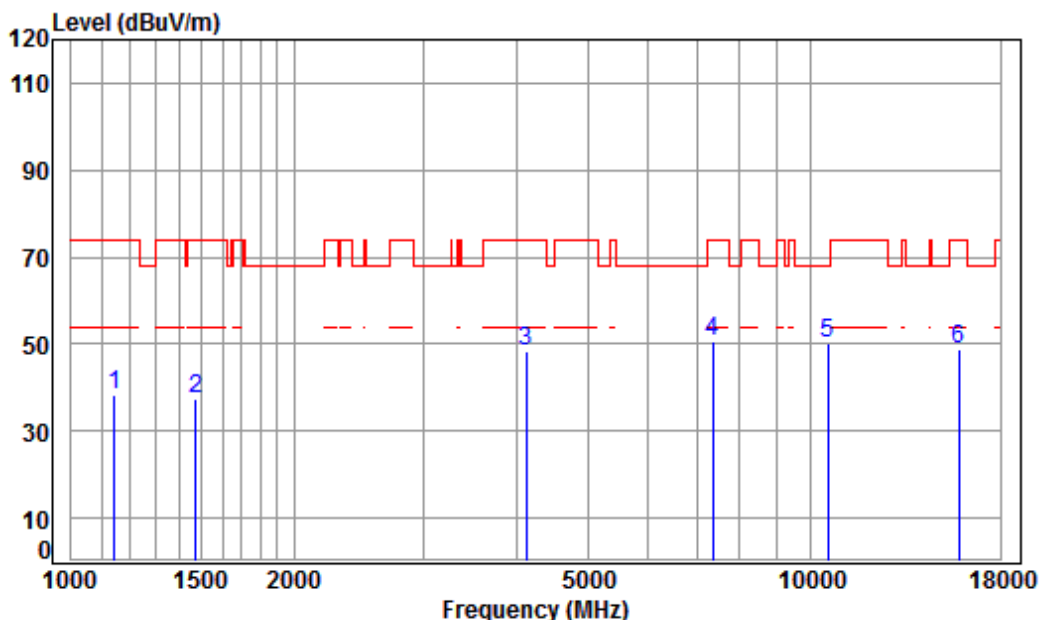

Condition: 3m HORIZONTAL

Job No : 0217RG

Mode : 5270 TX RSE

: Ant 1+2 5G WIFI 11AC(40) CH54

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit	Over	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1145.507	4.20	24.20	38.70	48.45	38.15	74.00	-35.85	peak
2	1473.013	5.39	25.69	38.70	45.19	37.57	74.00	-36.43	peak
3	4121.768	7.13	33.60	38.11	45.72	48.34	74.00	-25.66	peak
4	7368.741	10.03	36.35	38.24	42.66	50.80	74.00	-23.20	peak
5	pp10540.000	11.32	37.15	36.36	38.00	50.11	68.20	-18.09	peak
6	15810.000	14.71	41.28	37.93	30.63	48.69	74.00	-25.31	peak




SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch

Report No.: SZEM180200138802

Page: 330 of 817

Test mode:	802.11ac(HT40)	Frequency(MHz):	5310	Peak	Vertical
------------	----------------	-----------------	------	------	----------

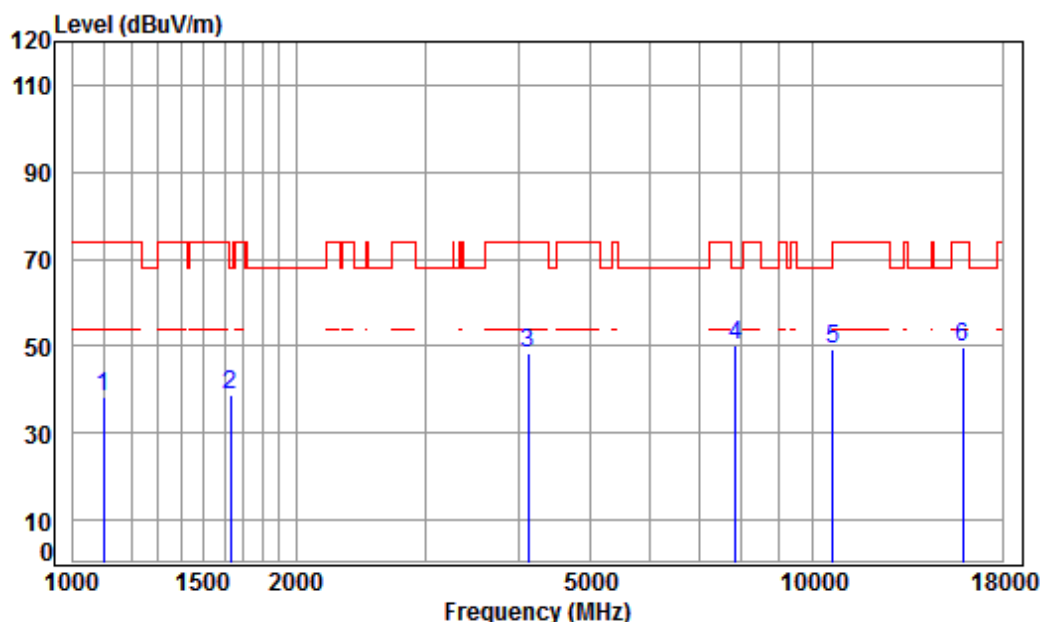

Condition: 3m VERTICAL

Job No : 0217RG

Mode : 5310 TX RSE

: Ant 1+2 5G WIFI 11AC(40) CH62

		Cable	Ant	Preamp	Read	Limit	Over	
Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1100.079	4.00	23.96	38.70	49.18	38.44	74.00	-35.56 peak
2	1629.825	5.31	26.38	38.70	45.71	38.70	68.20	-29.50 peak
3	4121.768	7.13	33.60	38.11	45.72	48.34	74.00	-25.66 peak
4 pp	7852.524	9.96	36.51	38.29	41.82	50.00	68.20	-18.20 peak
5	10620.000	11.37	37.25	36.36	37.13	49.39	74.00	-24.61 peak
6	15930.000	14.89	41.23	37.85	31.49	49.76	74.00	-24.24 peak




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM180200138802

Page: 331 of 817

Test mode:	802.11ac(HT40)	Frequency(MHz):	5310	Peak	Horizontal
------------	----------------	-----------------	------	------	------------

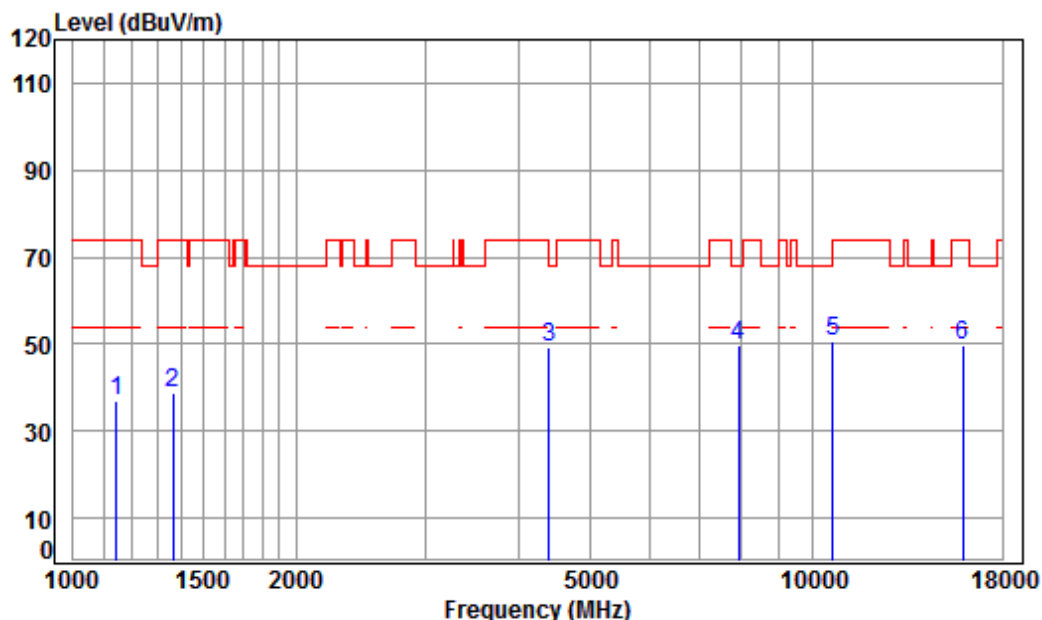

Condition: 3m HORIZONTAL

Job No : 0217RG

Mode : 5310 TX RSE

: Ant 1+2 5G WIFI 11AC(40) CH62

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit	Over	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1145.507	4.20	24.20	38.70	47.30	37.00	74.00	-37.00	peak
2	1366.374	5.04	25.25	38.70	47.09	38.68	74.00	-35.32	peak
3	4392.376	7.44	33.60	38.14	46.36	49.26	74.00	-24.74	peak
4 pp	7920.911	9.96	36.55	38.29	41.54	49.76	68.20	-18.44	peak
5	10620.000	11.37	37.25	36.36	38.34	50.60	74.00	-23.40	peak
6	15930.000	14.89	41.23	37.85	31.36	49.63	74.00	-24.37	peak




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM180200138802

Page: 332 of 817

Test mode:	802.11ac(HT40)	Frequency(MHz):	5510	Peak	Vertical
------------	----------------	-----------------	------	------	----------

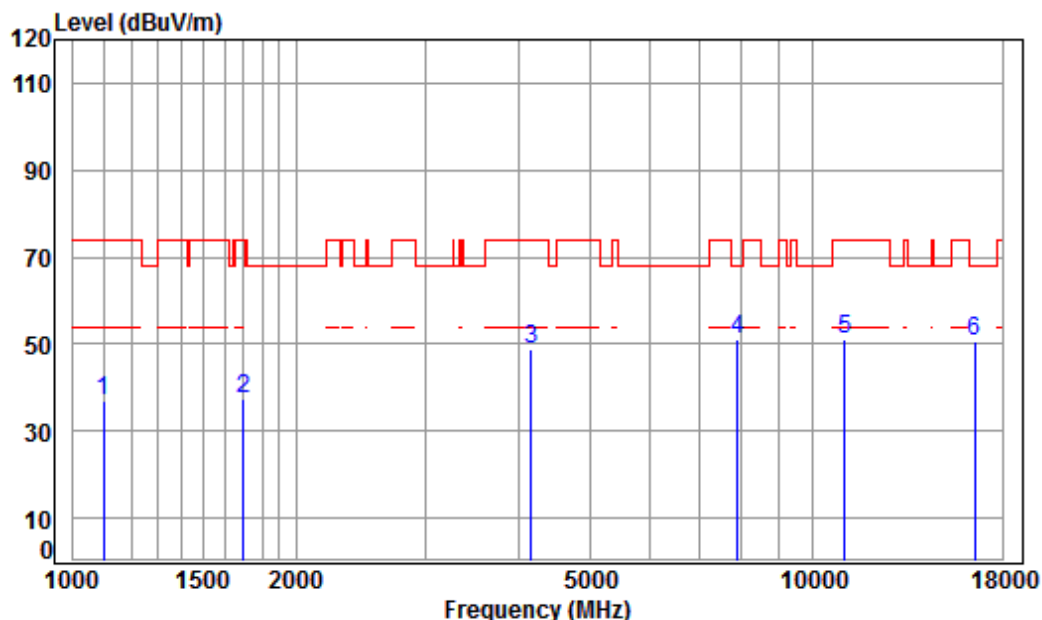

Condition: 3m VERTICAL

Job No : 0217RG

Mode : 5510 TX RSE

: Ant 1+2 5G WIFI 11AC(40) CH102

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Limit Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1100.079	4.00	23.96	38.70	47.48	36.74	74.00	-37.26	peak
2	1697.129	5.23	26.66	38.70	44.33	37.52	74.00	-36.48	peak
3	4157.664	7.17	33.60	38.12	46.26	48.91	74.00	-25.09	peak
4 pp	7898.049	9.96	36.54	38.29	42.79	51.00	68.20	-17.20	peak
5	11020.000	11.65	37.72	36.41	38.12	51.08	74.00	-22.92	peak
6	16530.000	14.63	42.71	38.02	31.32	50.64	68.20	-17.56	peak




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM180200138802

Page: 333 of 817

Test mode:	802.11ac(HT40)	Frequency(MHz):	5510	Peak	Horizontal
------------	----------------	-----------------	------	------	------------

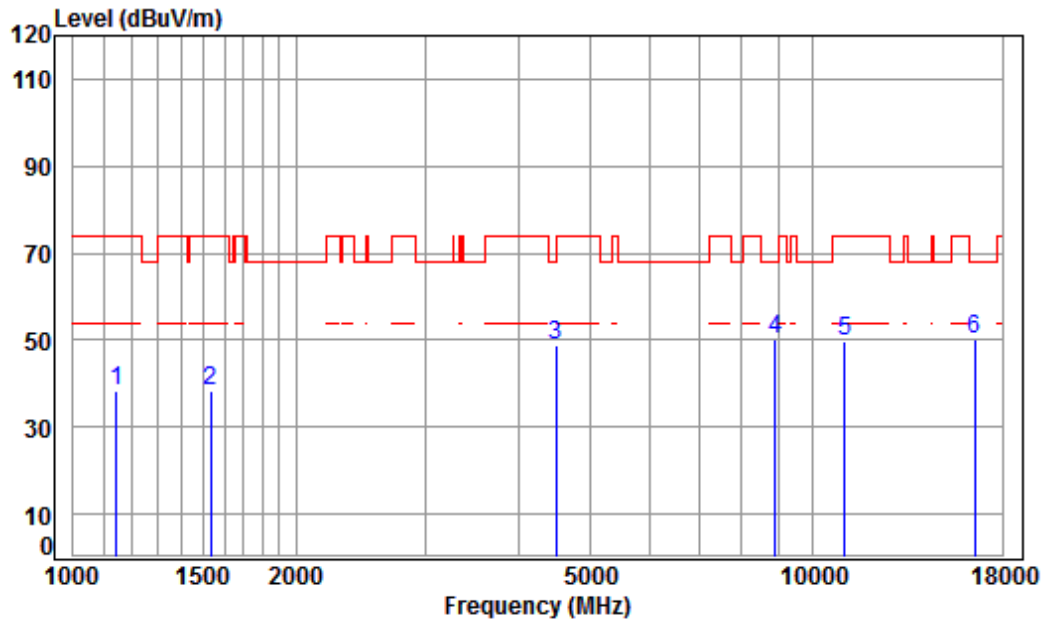

Condition: 3m HORIZONTAL

Job No : 0217RG

Mode : 5510 TX RSE

: Ant 1+2 5G WIFI 11AC(40) CH102

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Limit Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1145.507	4.20	24.20	38.70	48.50	38.20	74.00	-35.80	peak
2	1533.841	5.44	25.96	38.70	45.49	38.19	74.00	-35.81	peak
3	4495.125	7.55	33.60	38.15	46.01	49.01	68.20	-19.19	peak
4 pp	8891.725	10.37	36.47	38.21	41.70	50.33	68.20	-17.87	peak
5	11020.000	11.65	37.72	36.41	36.66	49.62	74.00	-24.38	peak
6	16530.000	14.63	42.71	38.02	30.93	50.25	68.20	-17.95	peak




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM180200138802

Page: 334 of 817

Test mode:	802.11ac(HT40)	Frequency(MHz):	5550	Peak	Vertical
------------	----------------	-----------------	------	------	----------

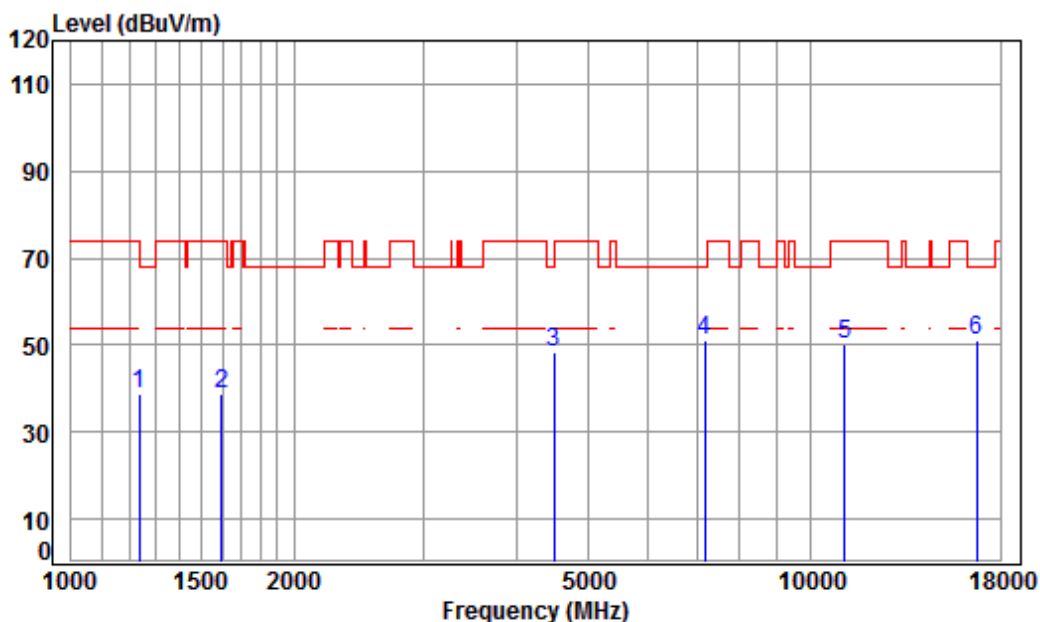

Condition: 3m VERTICAL

Job No : 0217RG

Mode : 5550 TX RSE

: Ant 1+2 5G WIFI 11AC(40) CH110

		Cable	Ant	Preamp	Read	Limit	Over	
	Freq	Loss	Factor	Factor	Level	Level	Line	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1	1234.909	4.55	24.65	38.70	48.13	38.63	74.00	-35.37 peak
2	1597.181	5.35	26.24	38.70	46.03	38.92	74.00	-35.08 peak
3	4495.125	7.55	33.60	38.15	45.34	48.34	68.20	-19.86 peak
4	7179.527	10.08	36.43	38.22	42.67	50.96	68.20	-17.24 peak
5	11100.000	11.73	37.78	36.43	37.33	50.41	74.00	-23.59 peak
6	pp16740.000	15.57	42.75	38.10	30.96	51.18	68.20	-17.02 peak




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM180200138802

Page: 335 of 817

Test mode:	802.11ac(HT40)	Frequency(MHz):	5550	Peak	Horizontal
------------	----------------	-----------------	------	------	------------

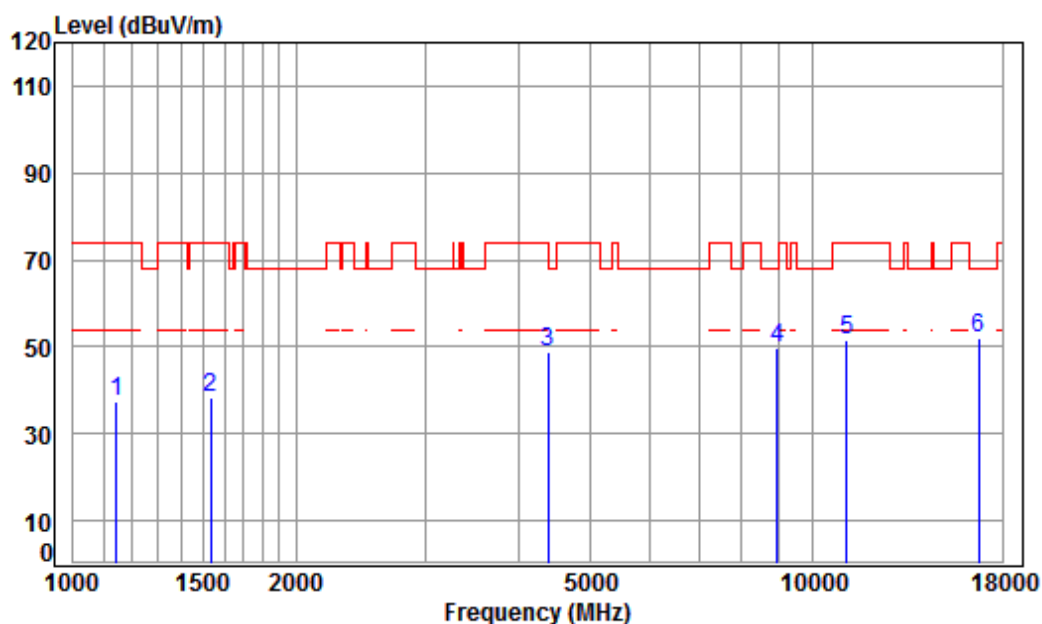

Condition: 3m HORIZONTAL

Job No : 0217RG

Mode : 5550 TX RSE

: Ant 1+2 5G WIFI 11AC(40) CH110

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Limit Level	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1	1145.507	4.20	24.20	38.70	47.49	37.19	74.00	-36.81 peak
2	1533.841	5.44	25.96	38.70	45.68	38.38	74.00	-35.62 peak
3	4379.699	7.43	33.60	38.14	46.10	48.99	74.00	-25.01 peak
4	8943.274	10.39	36.53	38.21	41.01	49.72	68.20	-18.48 peak
5	11100.000	11.73	37.78	36.43	38.28	51.36	74.00	-22.64 peak
6	pp16740.000	15.57	42.75	38.10	31.87	52.09	68.20	-16.11 peak




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM180200138802

Page: 336 of 817

Test mode:	802.11ac(HT40)	Frequency(MHz):	5670	Peak	Vertical
------------	----------------	-----------------	------	------	----------

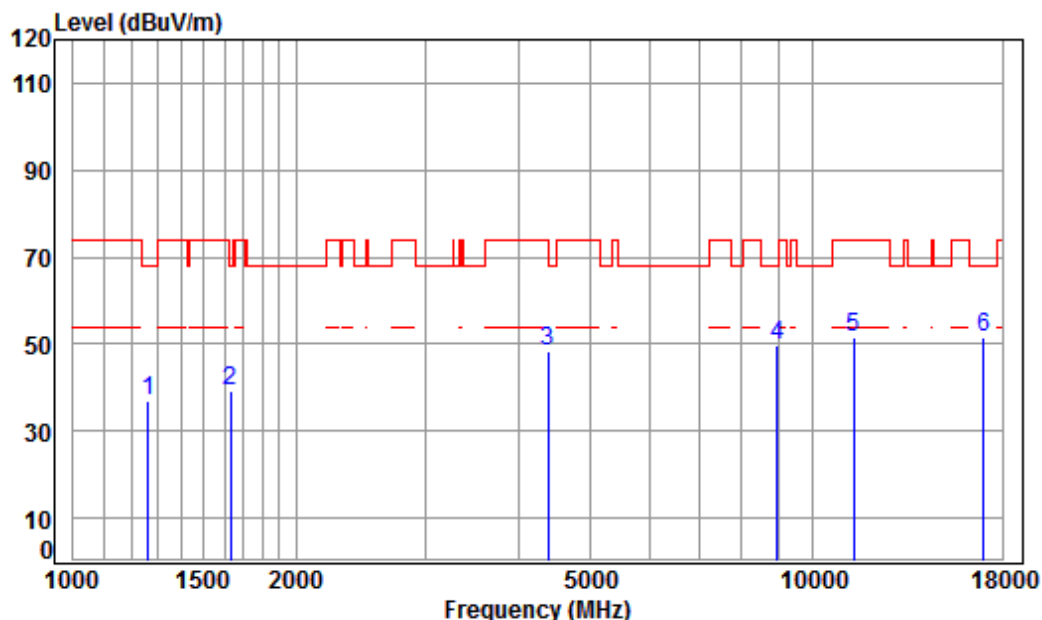

Condition: 3m VERTICAL

Job No : 0217RG

Mode : 5670 TX RSE

: Ant 1+2 5G WIFI 11AC(40) CH134

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Limit Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1263.796	4.66	24.79	38.70	46.25	37.00	68.20	-31.20	peak
2	1634.543	5.31	26.40	38.70	46.17	39.18	68.20	-29.02	peak
3	4379.699	7.43	33.60	38.14	45.51	48.40	74.00	-25.60	peak
4	8943.274	10.39	36.53	38.21	40.98	49.69	68.20	-18.51	peak
5	11340.000	11.98	37.97	36.50	38.21	51.66	74.00	-22.34	peak
6	pp17010.000	16.69	42.81	38.20	30.34	51.64	68.20	-16.56	peak




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM180200138802

Page: 337 of 817

Test mode:	802.11ac(HT40)	Frequency(MHz):	5670	Peak	Horizontal
------------	----------------	-----------------	------	------	------------

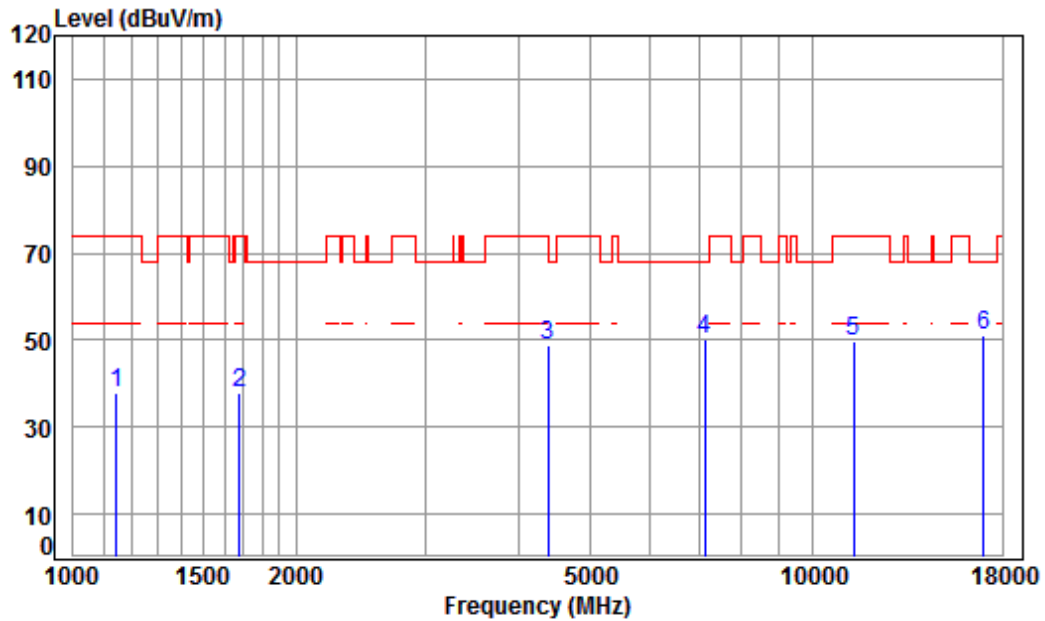

Condition: 3m HORIZONTAL

Job No : 0217RG

Mode : 5670 TX RSE

: Ant 1+2 5G WIFI 11AC(40) CH134

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit	Over	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1145.507	4.20	24.20	38.70	48.04	37.74	74.00	-36.26	peak
2	1677.621	5.25	26.58	38.70	44.67	37.80	74.00	-36.20	peak
3	4379.699	7.43	33.60	38.14	45.80	48.69	74.00	-25.31	peak
4	7138.144	10.09	36.44	38.21	42.09	50.41	68.20	-17.79	peak
5	11340.000	11.98	37.97	36.50	36.34	49.79	74.00	-24.21	peak
6	pp17010.000	16.69	42.81	38.20	29.84	51.14	68.20	-17.06	peak




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM180200138802

Page: 338 of 817

Test mode:	802.11ac(HT40)	Frequency(MHz):	5755	Peak	Vertical
------------	----------------	-----------------	------	------	----------

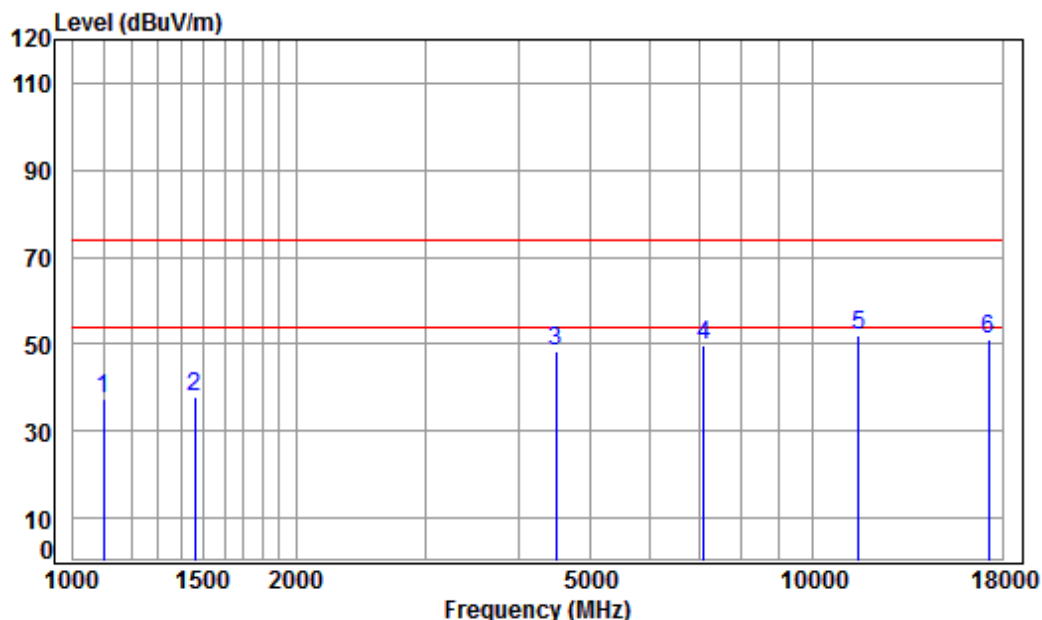

Condition: 3m VERTICAL

Job No : 0217RG

Mode : 5755 TX RSE

: Ant 1+2 5G WIFI 11AC(40) CH151

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit	Over	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1100.079	4.00	23.96	38.70	48.34	37.60	74.00	-36.40	peak
2	1460.295	5.35	25.64	38.70	45.57	37.86	74.00	-36.14	peak
3	4495.125	7.55	33.60	38.15	45.53	48.53	74.00	-25.47	peak
4	7117.542	10.10	36.45	38.21	41.37	49.71	74.00	-24.29	peak
5	pp11510.000	12.14	38.11	36.56	38.18	51.87	74.00	-22.13	peak
6	17265.000	16.12	43.12	38.12	29.99	51.11	74.00	-22.89	peak




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM180200138802

Page: 339 of 817

Test mode:	802.11ac(HT40)	Frequency(MHz):	5755	Peak	Horizontal
------------	----------------	-----------------	------	------	------------

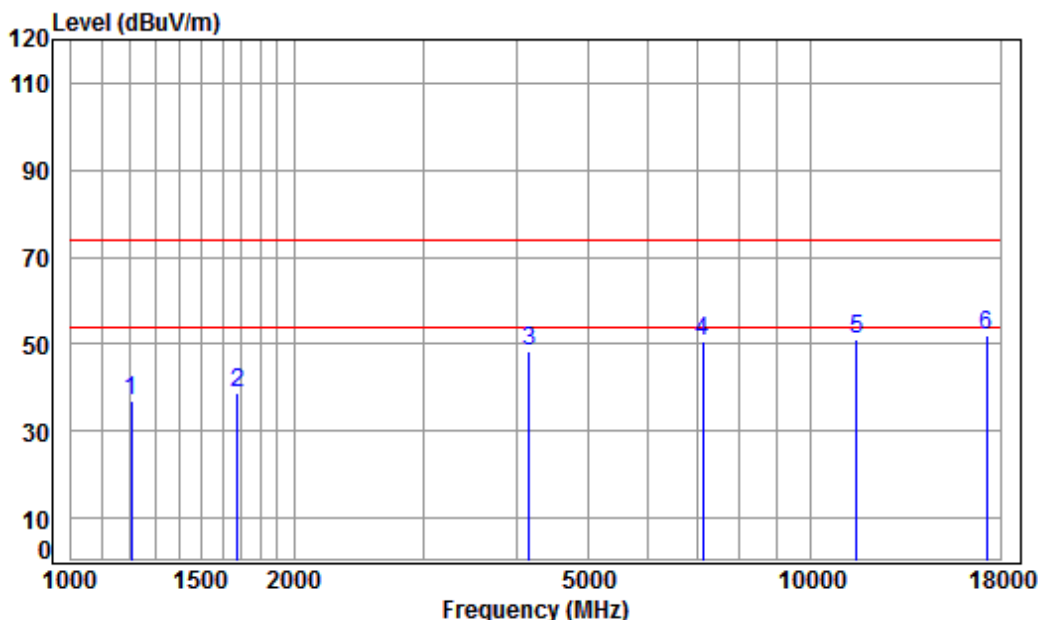

Condition: 3m HORIZONTAL

Job No : 0217RG

Mode : 5755 TX RSE

: Ant 1+2 5G WIFI 11AC(40) CH151

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit	Over	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1206.682	4.44	24.51	38.70	46.58	36.83	74.00	-37.17	peak
2	1677.621	5.25	26.58	38.70	45.86	38.99	74.00	-35.01	peak
3	4157.664	7.17	33.60	38.12	45.85	48.50	74.00	-25.50	peak
4	7138.144	10.09	36.44	38.21	42.26	50.58	74.00	-23.42	peak
5	11510.000	12.14	38.11	36.56	37.55	51.24	74.00	-22.76	peak
6	pp17265.000	16.12	43.12	38.12	30.79	51.91	74.00	-22.09	peak




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM180200138802

Page: 340 of 817

Test mode:	802.11ac(HT40)	Frequency(MHz):	5795	Peak	Vertical
------------	----------------	-----------------	------	------	----------

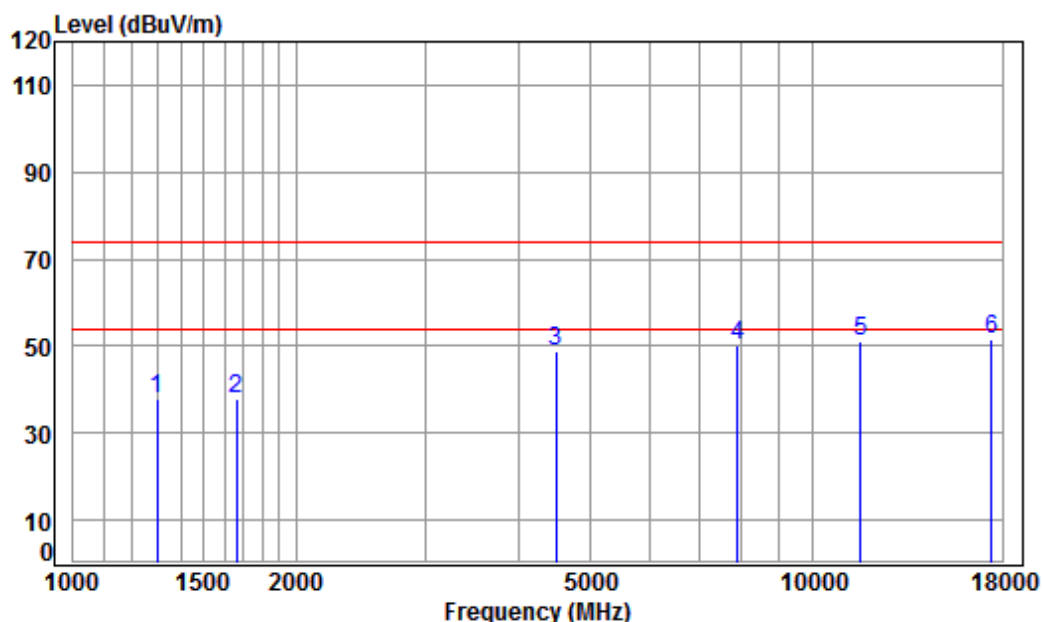

Condition: 3m VERTICAL

Job No : 0217RG

Mode : 5795 TX RSE

: Ant 1+2 5G WIFI 11AC(40) CH159

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit	Over	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1300.858	4.80	24.96	38.70	47.03	38.09	74.00	-35.91	peak
2	1663.137	5.27	26.52	38.70	44.68	37.77	74.00	-36.23	peak
3	4495.125	7.55	33.60	38.15	45.74	48.74	74.00	-25.26	peak
4	7898.049	9.96	36.54	38.29	41.84	50.05	74.00	-23.95	peak
5	11590.000	12.17	38.19	36.58	37.23	51.01	74.00	-22.99	peak
6	pp17385.000	15.85	43.26	38.08	30.43	51.46	74.00	-22.54	peak




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM180200138802

Page: 341 of 817

Test mode:	802.11ac(HT40)	Frequency(MHz):	5795	Peak	Horizontal
------------	----------------	-----------------	------	------	------------

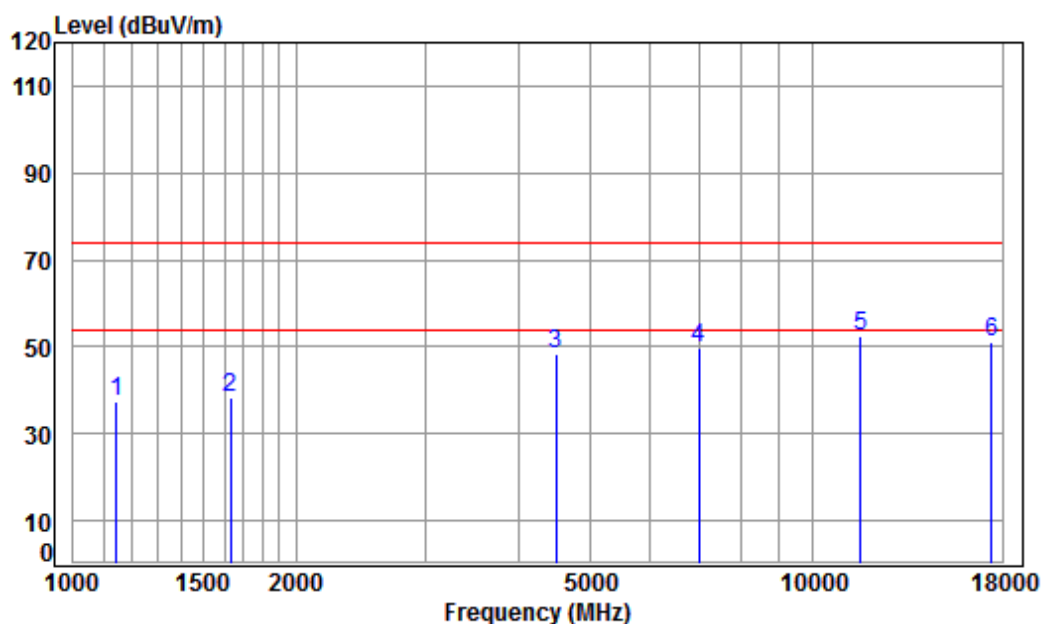

Condition: 3m HORIZONTAL

Job No : 0217RG

Mode : 5795 TX RSE

: Ant 1+2 5G WIFI 11AC(40) CH159

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1145.507	4.20	24.20	38.70	47.60	37.30	74.00	-36.70	peak
2	1629.825	5.31	26.38	38.70	45.22	38.21	74.00	-35.79	peak
3	4495.125	7.55	33.60	38.15	45.44	48.44	74.00	-25.56	peak
4	7015.420	10.13	36.49	38.20	41.43	49.85	74.00	-24.15	peak
5	pp11590.000	12.17	38.19	36.58	38.71	52.49	74.00	-21.51	peak
6	17385.000	15.85	43.26	38.08	29.89	50.92	74.00	-23.08	peak




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM180200138802

Page: 342 of 817

Test mode:	802.11ac(HT80)	Frequency(MHz):	5210	Peak	Vertical
------------	----------------	-----------------	------	------	----------

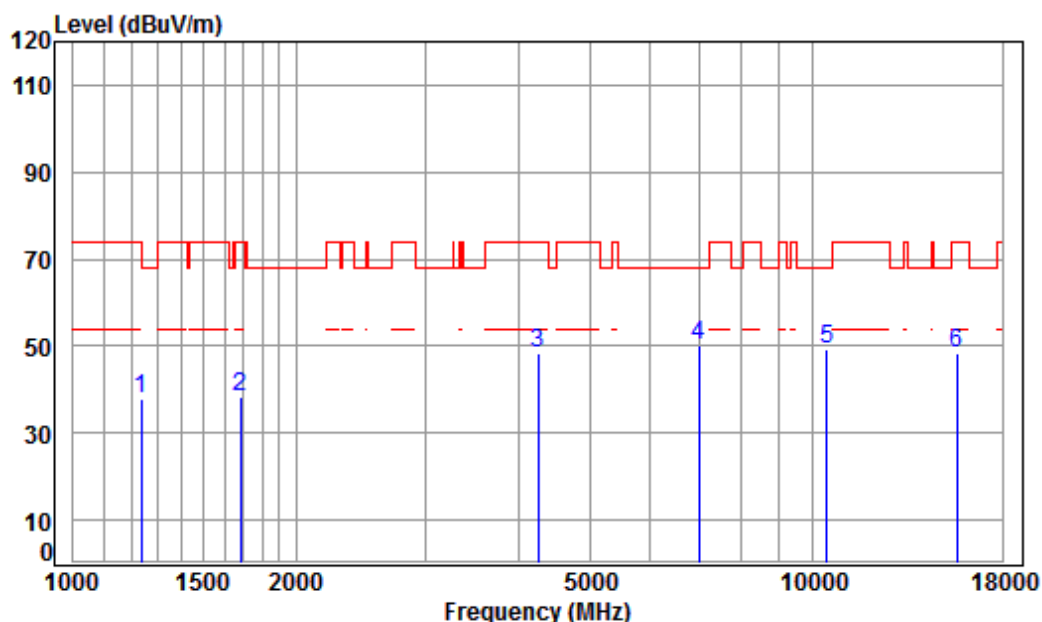

Condition: 3m VERTICAL

Job No : 0217RG

Mode : 5210 TX RSE

: Ant 1+2 5G WIFI 11AC(80) CH42

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit	Over	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1234.909	4.55	24.65	38.70	47.44	37.94	74.00	-36.06	peak
2	1682.477	5.25	26.60	38.70	44.98	38.13	74.00	-35.87	peak
3	4254.921	7.28	33.60	38.13	45.57	48.32	74.00	-25.68	peak
4 pp	7015.420	10.13	36.49	38.20	41.77	50.19	68.20	-18.01	peak
5	10420.000	11.24	37.18	36.34	37.16	49.24	68.20	-18.96	peak
6	15630.000	14.44	41.35	38.05	30.47	48.21	74.00	-25.79	peak




SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch

Report No.: SZEM180200138802

Page: 343 of 817

Test mode:	802.11ac(HT80)	Frequency(MHz):	5210	Peak	Horizontal
------------	----------------	-----------------	------	------	------------

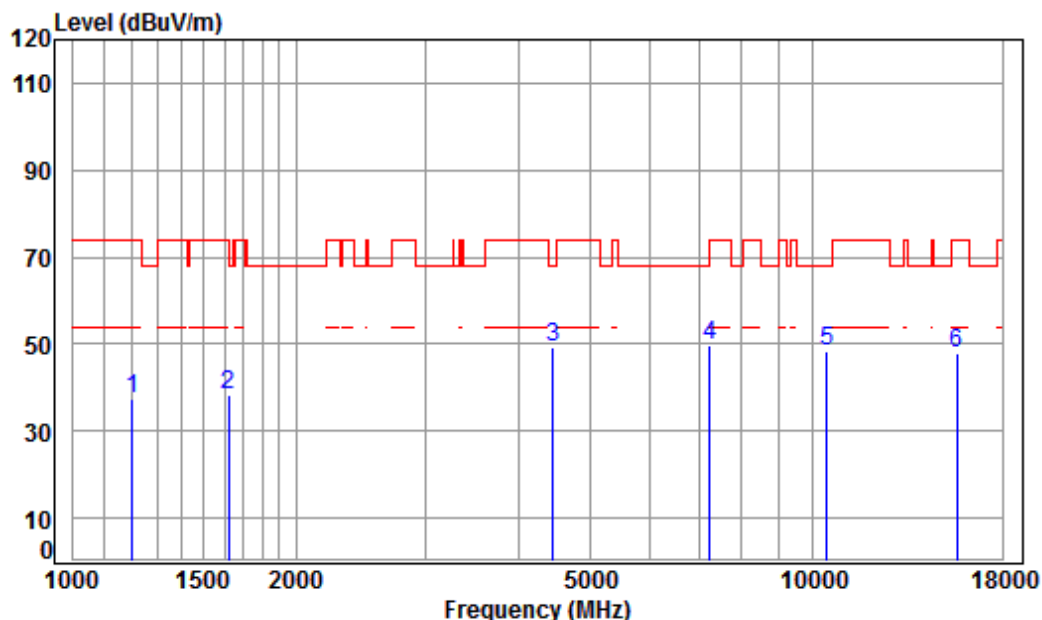

Condition: 3m HORIZONTAL

Job No : 0217RG

Mode : 5210 TX RSE

: Ant 1+2 5G WIFI 11AC(80) CH42

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit	Over	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1203.199	4.43	24.49	38.70	46.97	37.19	74.00	-36.81	peak
2	1620.431	5.32	26.34	38.70	45.37	38.33	74.00	-35.67	peak
3	4456.315	7.51	33.60	38.15	46.39	49.35	68.20	-18.85	peak
4 pp	7242.052	10.07	36.40	38.23	41.53	49.77	68.20	-18.43	peak
5	10420.000	11.24	37.18	36.34	36.33	48.41	68.20	-19.79	peak
6	15630.000	14.44	41.35	38.05	30.33	48.07	74.00	-25.93	peak




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM180200138802

Page: 344 of 817

Test mode:	802.11ac(HT80)	Frequency(MHz):	5290	Peak	Vertical
------------	----------------	-----------------	------	------	----------

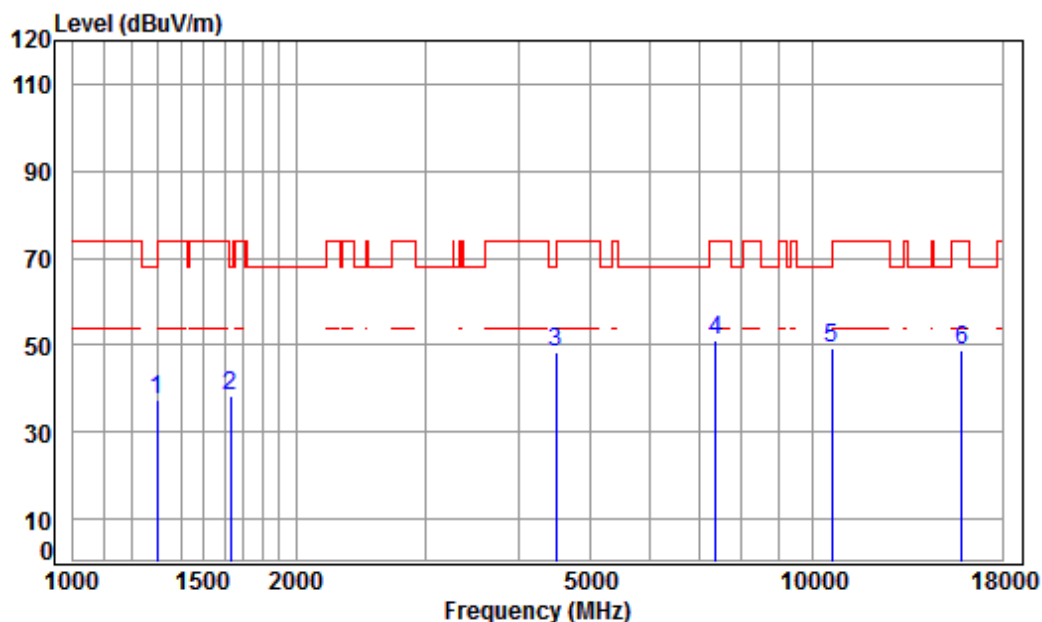

Condition: 3m VERTICAL

Job No : 0217RG

Mode : 5290 TX RSE

: Ant 1+2 5G WIFI 11AC(80) CH58

		Cable	Ant	Preamp	Read	Limit	Over	
	Freq	Loss	Factor	Factor	Level	Level	Line	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1	1300.858	4.80	24.96	38.70	46.54	37.60	74.00	-36.40 peak
2	1629.825	5.31	26.38	38.70	45.50	38.49	68.20	-29.71 peak
3	4495.125	7.55	33.60	38.15	45.54	48.54	68.20	-19.66 peak
4	7390.070	10.03	36.34	38.24	43.14	51.27	74.00	-22.73 peak
5	pp10580.000	11.35	37.20	36.36	37.13	49.32	68.20	-18.88 peak
6	15870.000	14.80	41.25	37.89	30.69	48.85	74.00	-25.15 peak




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM180200138802

Page: 345 of 817

Test mode:	802.11ac(HT80)	Frequency(MHz):	5290	Peak	Horizontal
------------	----------------	-----------------	------	------	------------

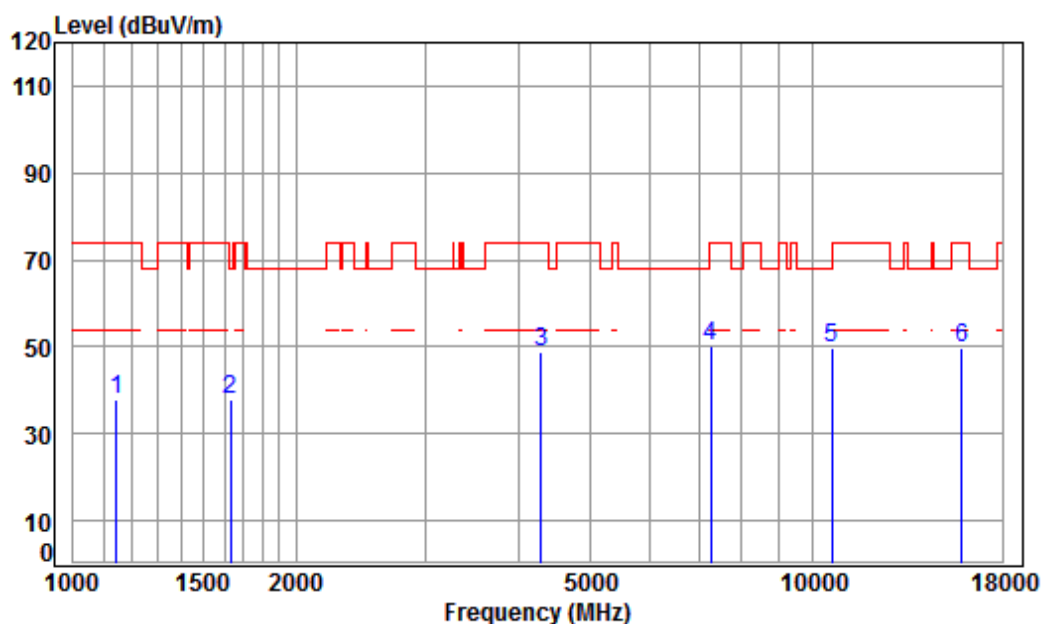

Condition: 3m HORIZONTAL

Job No : 0217RG

Mode : 5290 TX RSE

: Ant 1+2 5G WIFI 11AC(80) CH58

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Limit Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1145.507	4.20	24.20	38.70	48.10	37.80	74.00	-36.20	peak
2	1629.825	5.31	26.38	38.70	45.08	38.07	68.20	-30.13	peak
3	4291.977	7.33	33.60	38.13	45.87	48.67	74.00	-25.33	peak
4	7263.015	10.06	36.39	38.23	42.06	50.28	74.00	-23.72	peak
5	pp10580.000	11.35	37.20	36.36	37.37	49.56	68.20	-18.64	peak
6	15870.000	14.80	41.25	37.89	31.42	49.58	74.00	-24.42	peak




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM180200138802

Page: 346 of 817

Test mode:	802.11ac(HT80)	Frequency(MHz):	5530	Peak	Vertical
------------	----------------	-----------------	------	------	----------

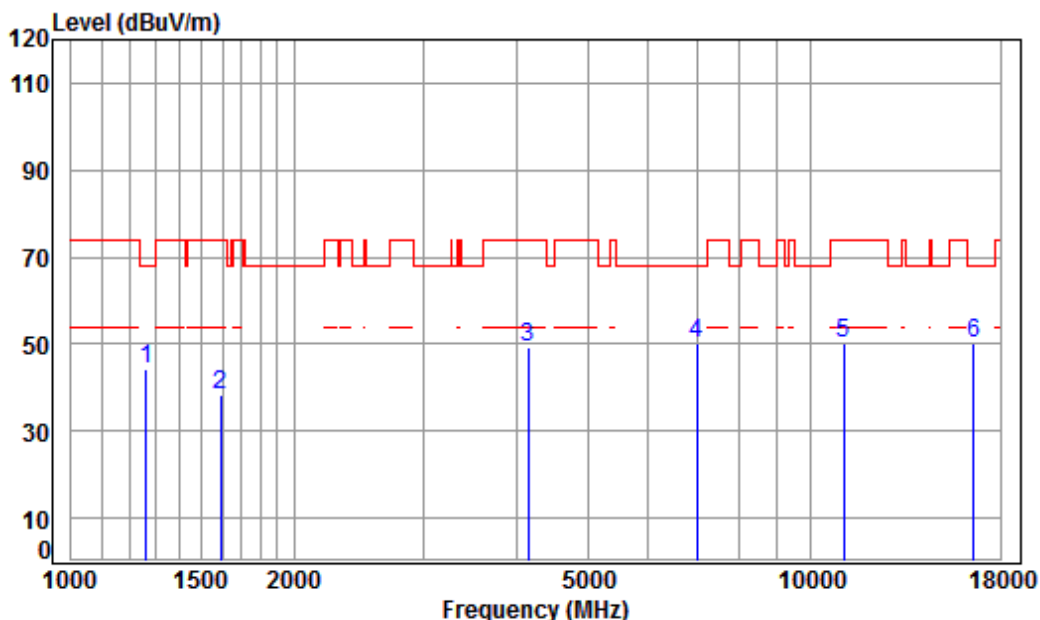

Condition: 3m VERTICAL

Job No : 0217RG

Mode : 5530 TX RSE

: Ant 1+2 5G WIFI 11AC(80) CH106

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit	Over	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1263.796	4.66	24.79	38.70	53.35	44.10	68.20	-24.10	peak
2	1592.571	5.36	26.22	38.70	45.32	38.20	74.00	-35.80	peak
3	4145.664	7.16	33.60	38.12	46.76	49.40	74.00	-24.60	peak
4	7015.420	10.13	36.49	38.20	41.57	49.99	68.20	-18.21	peak
5	11060.000	11.69	37.75	36.42	37.39	50.41	74.00	-23.59	peak
6	pp16590.000	14.90	42.72	38.04	30.83	50.41	68.20	-17.79	peak




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM180200138802

Page: 347 of 817

Test mode:	802.11ac(HT80)	Frequency(MHz):	5530	Peak	Horizontal
------------	----------------	-----------------	------	------	------------

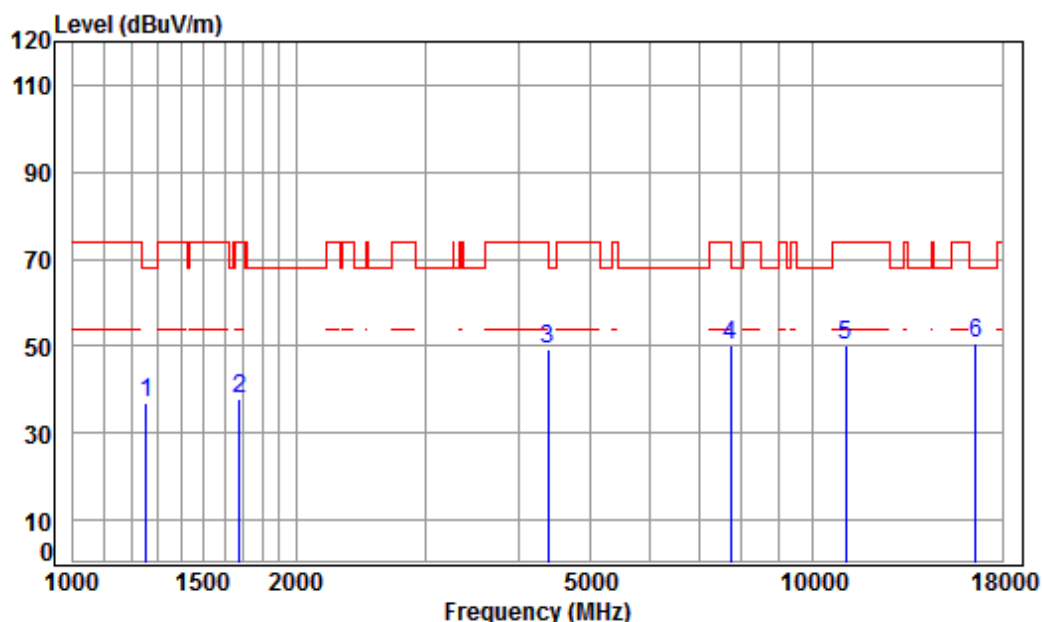

Condition: 3m HORIZONTAL

Job No : 0217RG

Mode : 5530 TX RSE

: Ant 1+2 5G WIFI 11AC(80) CH106

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Limit Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1256.512	4.64	24.75	38.70	46.28	36.97	68.20	-31.23	peak
2	1677.621	5.25	26.58	38.70	44.78	37.91	74.00	-36.09	peak
3	4379.699	7.43	33.60	38.14	46.49	49.38	74.00	-24.62	peak
4	7739.857	9.98	36.45	38.28	42.19	50.34	74.00	-23.66	peak
5	11060.000	11.69	37.75	36.42	37.39	50.41	74.00	-23.59	peak
6	pp16590.000	14.90	42.72	38.04	31.27	50.85	68.20	-17.35	peak




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM180200138802

Page: 348 of 817

Test mode:	802.11ac(HT80)	Frequency(MHz):	5610	Peak	Vertical
------------	----------------	-----------------	------	------	----------

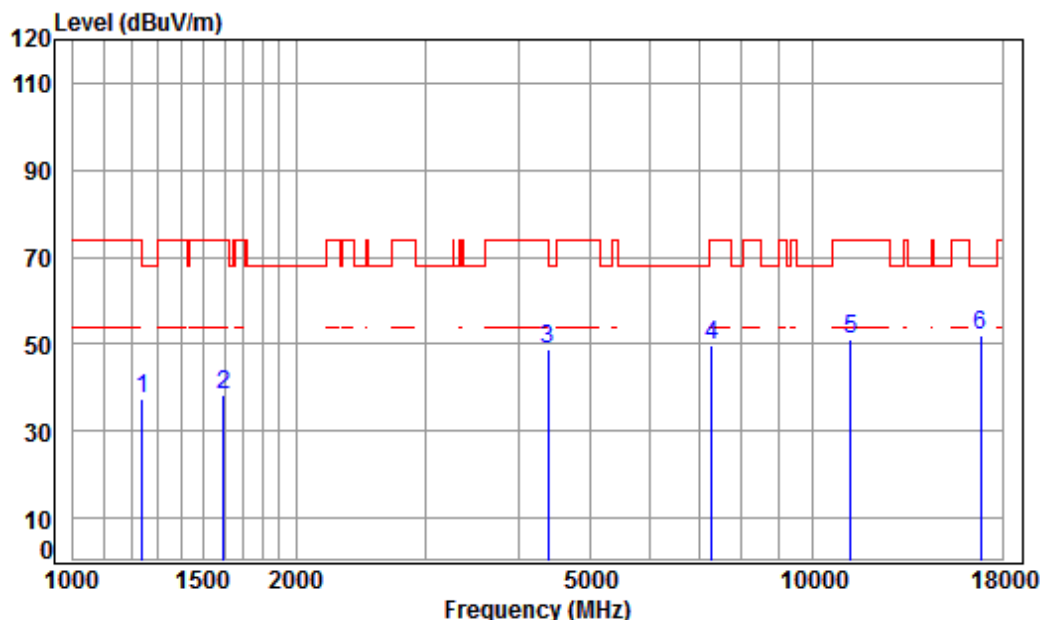

Condition: 3m VERTICAL

Job No : 0217RG

Mode : 5610 TX RSE

: Ant 1+2 5G WIFI 11AC(80) CH122

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit	Over	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1242.068	4.58	24.68	38.70	46.86	37.42	68.20	-30.78	peak
2	1597.181	5.35	26.24	38.70	45.53	38.42	74.00	-35.58	peak
3	4379.699	7.43	33.60	38.14	45.72	48.61	74.00	-25.39	peak
4	7284.038	10.06	36.38	38.23	41.67	49.88	74.00	-24.12	peak
5	11220.000	11.86	37.88	36.47	37.66	50.93	74.00	-23.07	peak
6	pp16830.000	15.97	42.77	38.13	31.34	51.95	68.20	-16.25	peak




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM180200138802

Page: 349 of 817

Test mode:	802.11ac(HT80)	Frequency(MHz):	5610	Peak	Horizontal
------------	----------------	-----------------	------	------	------------

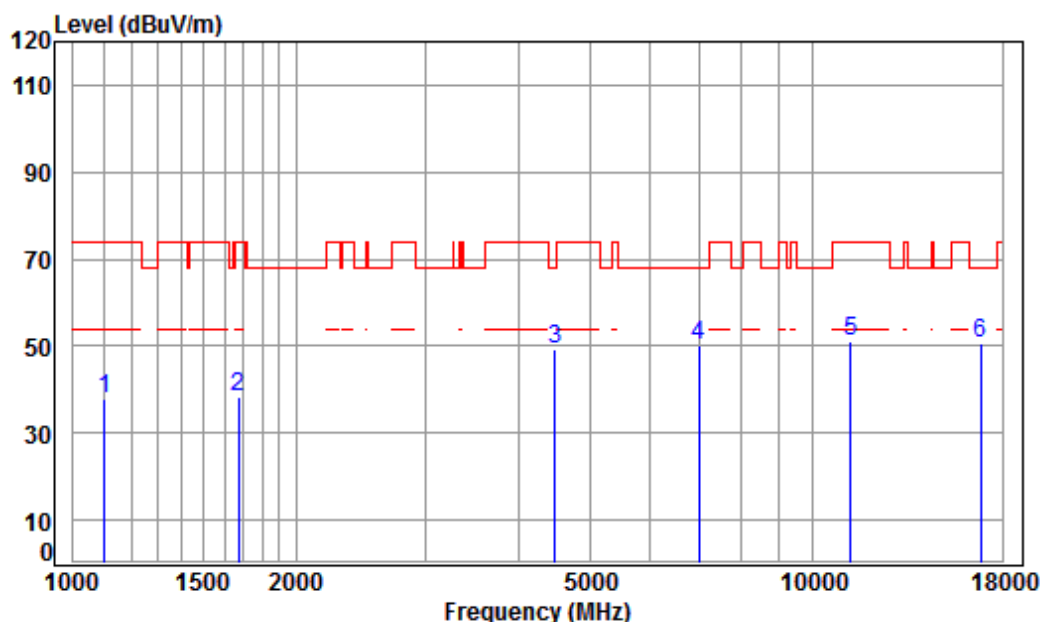

Condition: 3m HORIZONTAL

Job No : 0217RG

Mode : 5610 TX RSE

: Ant 1+2 5G WIFI 11AC(80) CH122

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit	Over	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1103.264	4.02	23.98	38.70	48.60	37.90	74.00	-36.10	peak
2	1672.779	5.26	26.56	38.70	45.02	38.14	74.00	-35.86	peak
3	4482.150	7.54	33.60	38.15	46.10	49.09	68.20	-19.11	peak
4	7015.420	10.13	36.49	38.20	41.98	50.40	68.20	-17.80	peak
5	11220.000	11.86	37.88	36.47	37.88	51.15	74.00	-22.85	peak
6	pp16830.000	15.97	42.77	38.13	29.94	50.55	68.20	-17.65	peak




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM180200138802

Page: 350 of 817

Test mode:	802.11ac(HT80)	Frequency(MHz):	5775	Peak	Vertical
------------	----------------	-----------------	------	------	----------

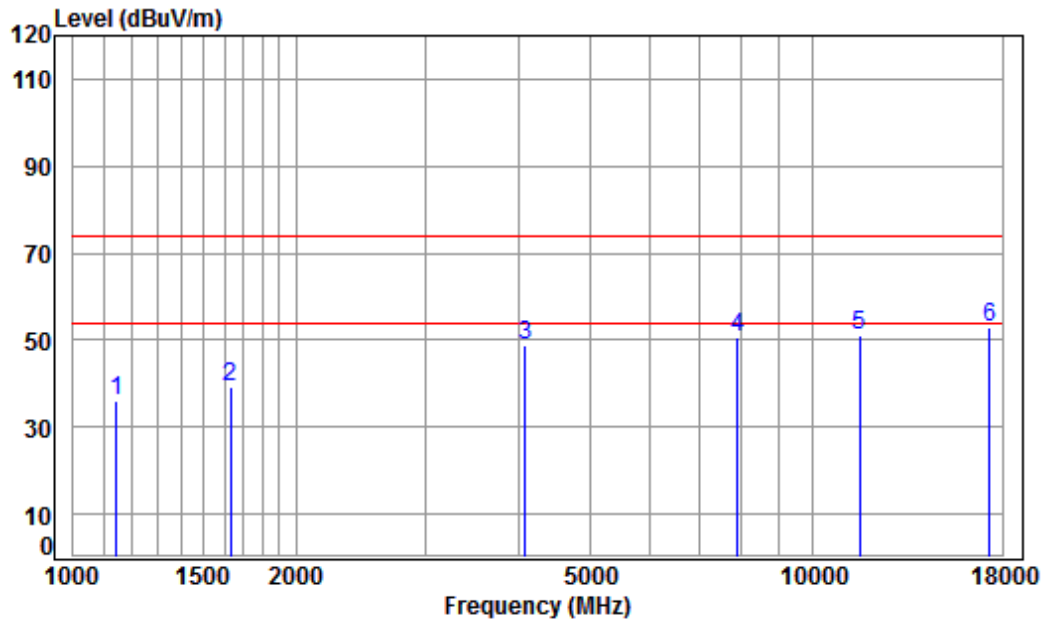

Condition: 3m VERTICAL

Job No : 0217RG

Mode : 5775 TX RSE

: Ant 1+2 5G WIFI 11AC(80) CH155

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit	Over	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1145.507	4.20	24.20	38.70	46.19	35.89	74.00	-38.11	peak
2	1629.825	5.31	26.38	38.70	46.21	39.20	74.00	-34.80	peak
3	4086.182	7.08	33.60	38.11	46.13	48.70	74.00	-25.30	peak
4	7898.049	9.96	36.54	38.29	42.28	50.49	74.00	-23.51	peak
5	11550.000	12.16	38.15	36.57	37.39	51.13	74.00	-22.87	peak
6	pp17325.000	15.98	43.19	38.10	31.82	52.89	74.00	-21.11	peak




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM180200138802

Page: 351 of 817

Test mode:	802.11ac(HT80)	Frequency(MHz):	5775	Peak	Horizontal
------------	----------------	-----------------	------	------	------------

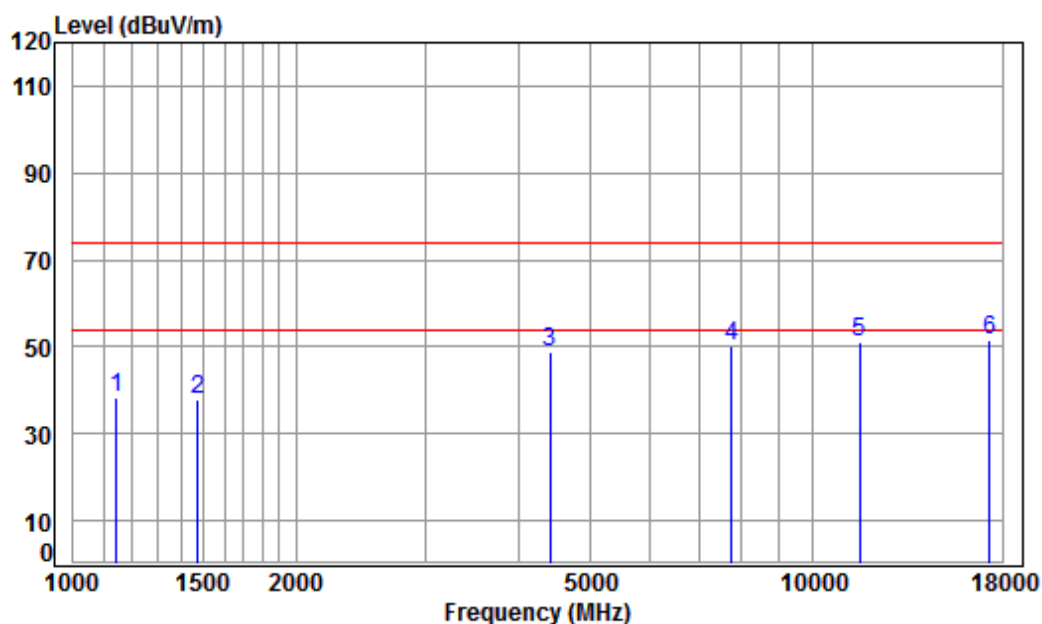

Condition: 3m HORIZONTAL

Job No : 0217RG

Mode : 5775 TX RSE

: Ant 1+2 5G WIFI 11AC(80) CH155

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit	Over	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1145.507	4.20	24.20	38.70	48.62	38.32	74.00	-35.68	peak
2	1473.013	5.39	25.69	38.70	45.51	37.89	74.00	-36.11	peak
3	4405.090	7.46	33.60	38.14	46.07	48.99	74.00	-25.01	peak
4	7762.260	9.97	36.46	38.28	41.86	50.01	74.00	-23.99	peak
5	11550.000	12.16	38.15	36.57	37.31	51.05	74.00	-22.95	peak
6	pp17325.000	15.98	43.19	38.10	30.38	51.45	74.00	-22.55	peak



SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch


Report No.: SZEM180200138802

Page: 352 of 817

CDD

Test plot as follows:

Test mode:	802.11a	Frequency(MHz):	5180	Peak	Vertical
------------	---------	-----------------	------	------	----------

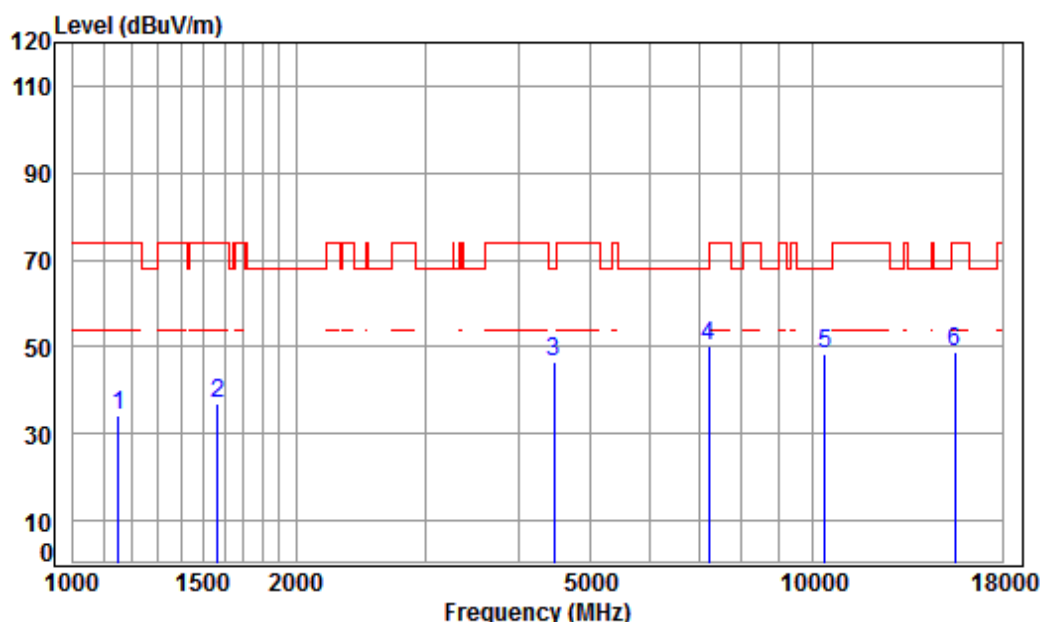

Condition: 3m VERTICAL

Job No : 0217RG

Mode : 5180 TX RSE

: Ant CDD 5G WIFI 11A CH36

		Cable	Ant	Preamp	Read		Limit	Over	
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1152.148	4.22	24.24	41.14	46.91	34.23	74.00	-39.77	peak
2	1569.721	5.39	26.12	41.45	46.77	36.83	74.00	-37.17	peak
3	4469.214	7.53	33.60	42.41	47.84	46.56	68.20	-21.64	peak
4	pp 7221.150	10.07	36.41	40.70	44.21	49.99	68.20	-18.21	peak
5	10360.000	11.19	37.24	37.45	37.51	48.49	68.20	-19.71	peak
6	15540.000	14.30	41.38	39.00	32.26	48.94	74.00	-25.06	peak




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM180200138802

Page: 353 of 817

Test mode:	802.11a	Frequency(MHz):	5180	Peak	Horizontal
------------	---------	-----------------	------	------	------------

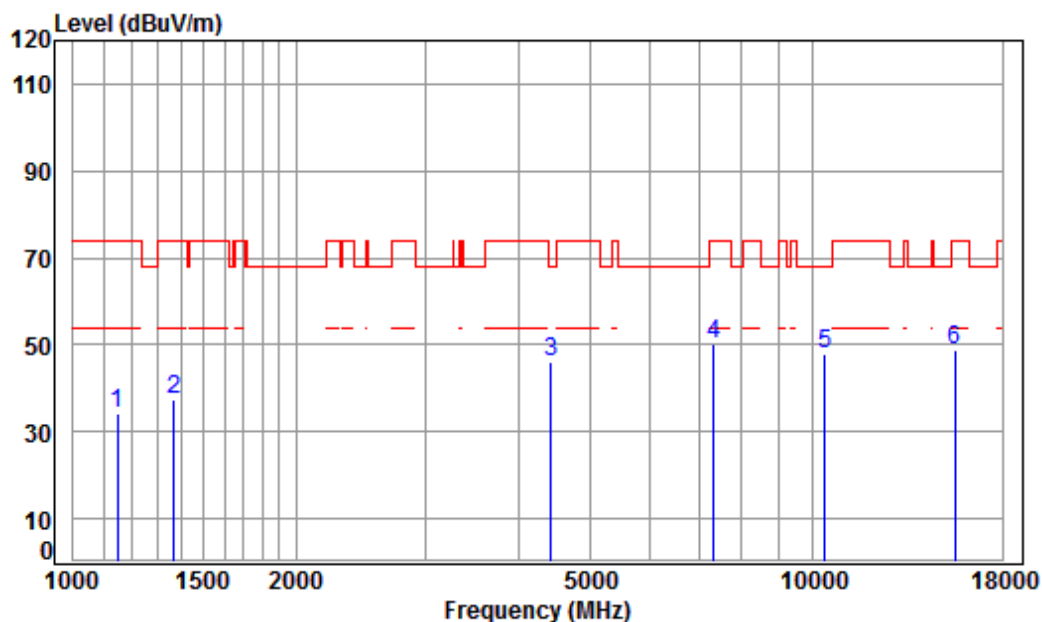

Condition: 3m HORIZONTAL

Job No : 0217RG

Mode : 5180 TX RSE

: Ant CDD 5G WIFI 11A CH36

		Cable	Ant	Preamp	Read	Limit	Over	
	Freq	Loss	Factor	Factor	Level	Level	Line	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1	1148.823	4.21	24.22	41.14	47.14	34.43	74.00	-39.57 peak
2	1370.328	5.05	25.26	41.32	48.22	37.21	74.00	-36.79 peak
3	4417.841	7.47	33.60	42.40	47.41	46.08	68.20	-22.12 peak
4	7326.267	10.04	36.37	40.63	44.62	50.40	74.00	-23.60 peak
5	pp10360.000	11.19	37.24	37.45	36.88	47.86	68.20	-20.34 peak
6	15540.000	14.30	41.38	39.00	31.94	48.62	74.00	-25.38 peak




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM180200138802

Page: 354 of 817

Test mode:	802.11a	Frequency(MHz):	5220	Peak	Vertical
------------	---------	-----------------	------	------	----------

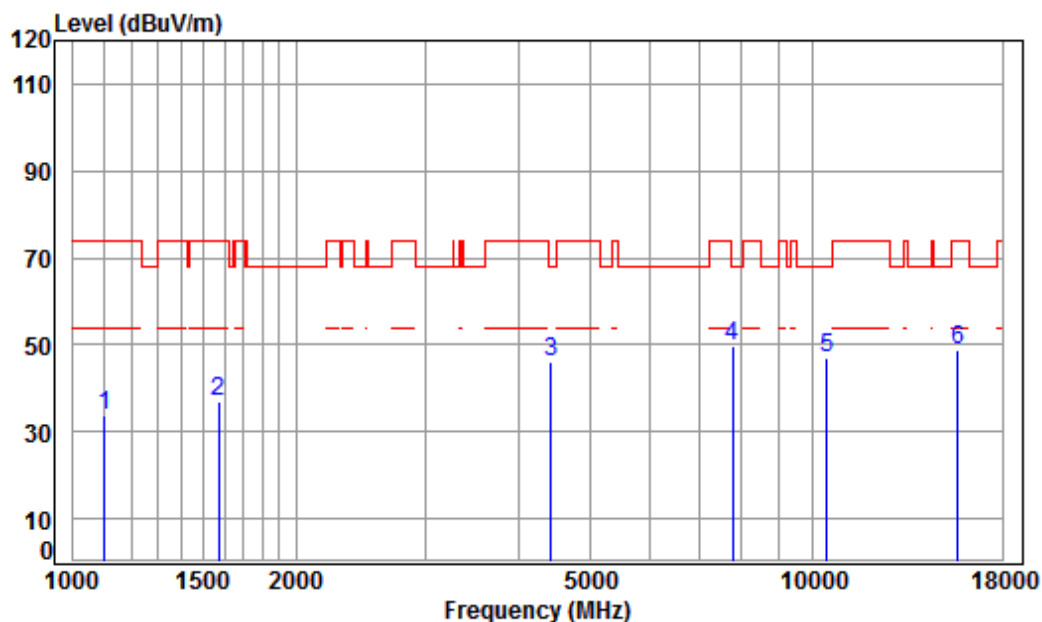

Condition: 3m VERTICAL

Job No : 0217RG

Mode : 5220 TX RSE

: Ant CDD 5G WIFI 11A CH44

		Cable	Ant	Preamp	Read	Limit	Over	
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1	1103.264	4.02	23.98	41.10	47.03	33.93	74.00	-40.07 peak
2	1574.265	5.38	26.14	41.45	47.05	37.12	74.00	-36.88 peak
3	4417.841	7.47	33.60	42.40	47.58	46.25	68.20	-21.95 peak
4 pp	7784.729	9.97	36.47	40.33	43.58	49.69	68.20	-18.51 peak
5	10440.000	11.25	37.16	37.51	36.14	47.04	68.20	-21.16 peak
6	15660.000	14.48	41.34	39.11	31.99	48.70	74.00	-25.30 peak




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM180200138802

Page: 355 of 817

Test mode:	802.11a	Frequency(MHz):	5220	Peak	Horizontal
------------	---------	-----------------	------	------	------------

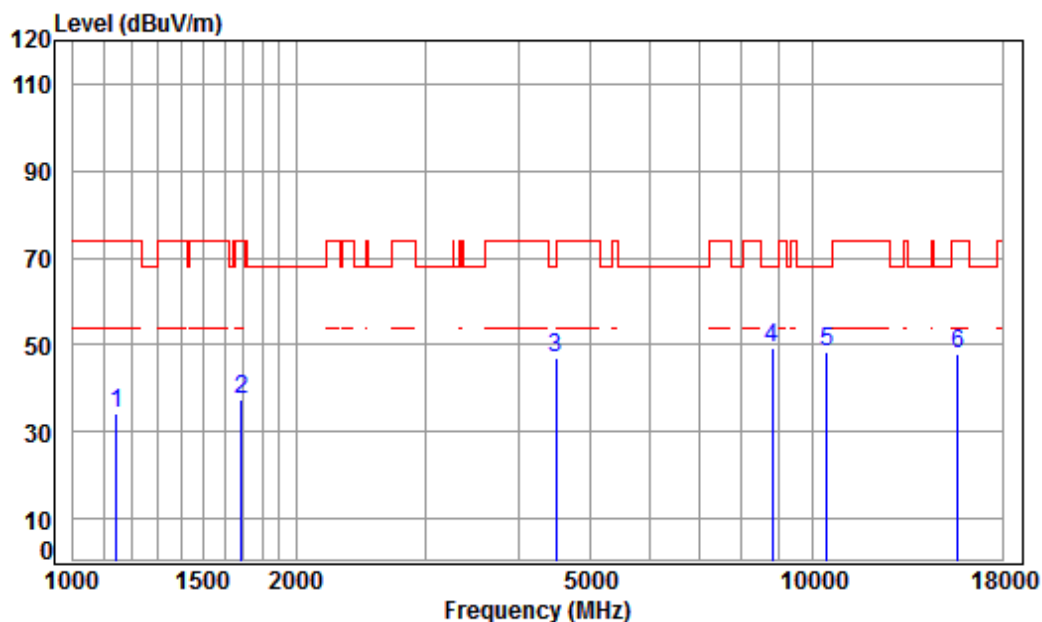

Condition: 3m HORIZONTAL

Job No : 0217RG

Mode : 5220 TX RSE

: Ant CDD 5G WIFI 11A CH44

		Cable	Ant	Preamp	Read		Limit	Over	
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1145.507	4.20	24.20	41.14	46.90	34.16	74.00	-39.84	peak
2	1687.347	5.24	26.62	41.52	46.99	37.33	74.00	-36.67	peak
3	4495.125	7.55	33.60	42.42	48.37	47.10	68.20	-21.10	peak
4	pp 8789.516	10.35	36.35	38.93	41.70	49.47	68.20	-18.73	peak
5	10440.000	11.25	37.16	37.51	37.57	48.47	68.20	-19.73	peak
6	15660.000	14.48	41.34	39.11	31.21	47.92	74.00	-26.08	peak




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM180200138802

Page: 356 of 817

Test mode:	802.11a	Frequency(MHz):	5240	Peak	Vertical
------------	---------	-----------------	------	------	----------

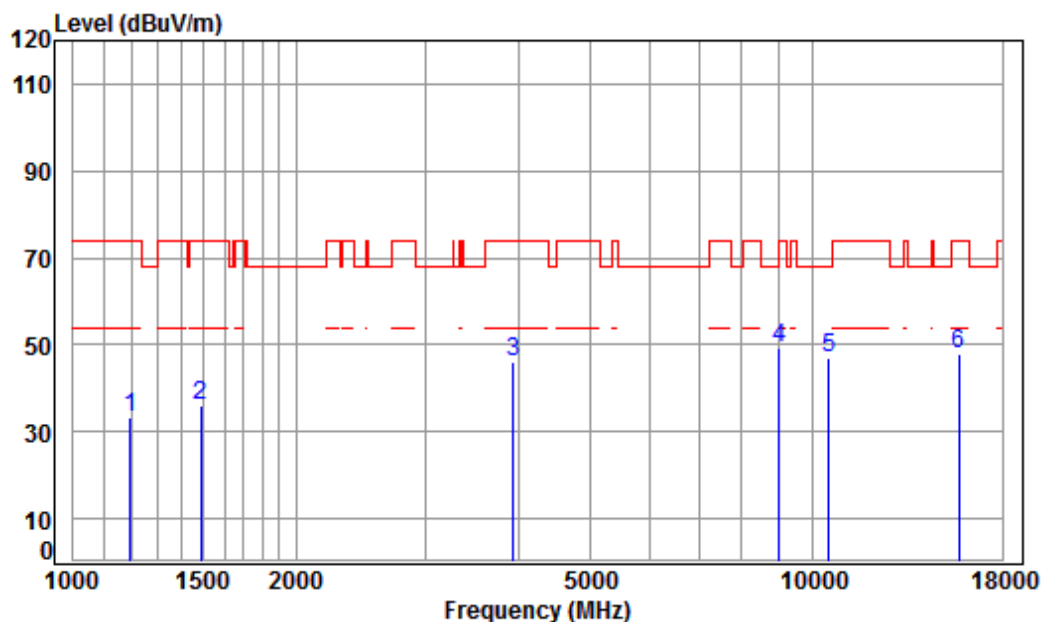

Condition: 3m VERTICAL

Job No : 0217RG

Mode : 5240 TX RSE

: Ant CDD 5G WIFI 11A CH48

		Cable	Ant	Preamp	Read	Limit	Over	
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1	1196.264	4.40	24.46	41.18	45.82	33.50	74.00	-40.50 peak
2	1485.841	5.43	25.74	41.40	46.30	36.07	74.00	-37.93 peak
3	3935.493	6.92	33.43	42.31	47.95	45.99	74.00	-28.01 peak
4 pp	8995.123	10.40	36.59	38.62	41.08	49.45	68.20	-18.75 peak
5	10480.000	11.28	37.12	37.53	36.33	47.20	68.20	-21.00 peak
6	15720.000	14.57	41.31	39.17	31.27	47.98	74.00	-26.02 peak




SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch

Report No.: SZEM180200138802

Page: 357 of 817

Test mode:	802.11a	Frequency(MHz):	5240	Peak	Horizontal
------------	---------	-----------------	------	------	------------

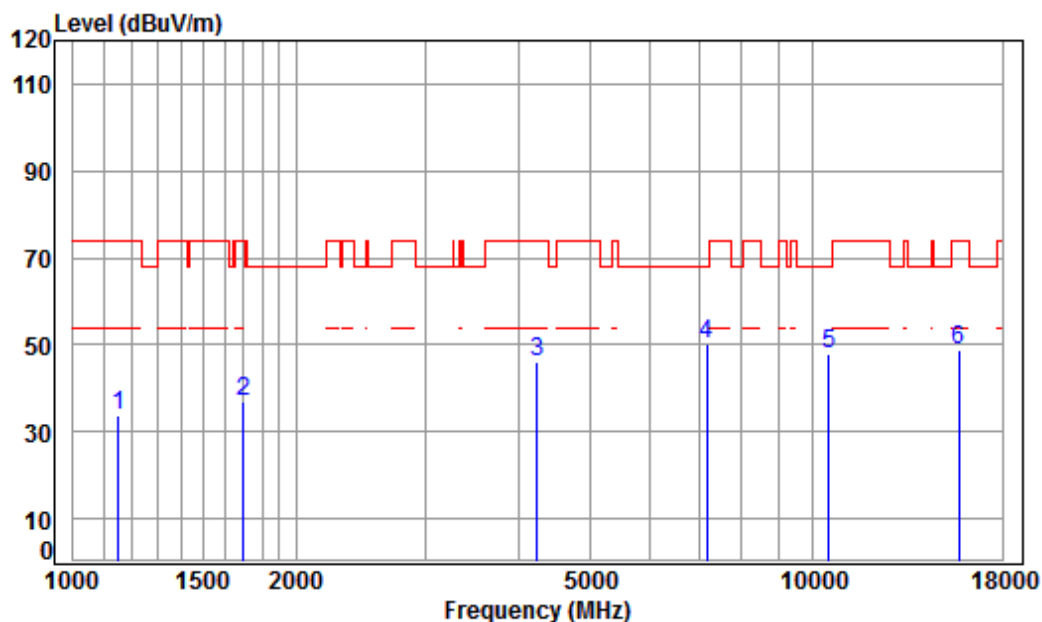

Condition: 3m HORIZONTAL

Job No : 0217RG

Mode : 5240 TX RSE

: Ant CDD 5G WIFI 11A CH48

		Cable	Ant	Preamp	Read	Limit	Over	
	Freq	Loss	Factor	Factor	Level	Line	Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1	1152.148	4.22	24.24	41.14	46.62	33.94	74.00	-40.06 peak
2	1697.129	5.23	26.66	41.53	46.49	36.85	74.00	-37.15 peak
3	4230.396	7.26	33.60	42.37	47.63	46.12	74.00	-27.88 peak
4 pp	7179.527	10.08	36.43	40.73	44.29	50.07	68.20	-18.13 peak
5	10480.000	11.28	37.12	37.53	37.09	47.96	68.20	-20.24 peak
6	15720.000	14.57	41.31	39.17	31.98	48.69	74.00	-25.31 peak




SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch

Report No.: SZEM180200138802

Page: 358 of 817

Test mode:	802.11a	Frequency(MHz):	5260	Peak	Vertical
------------	---------	-----------------	------	------	----------

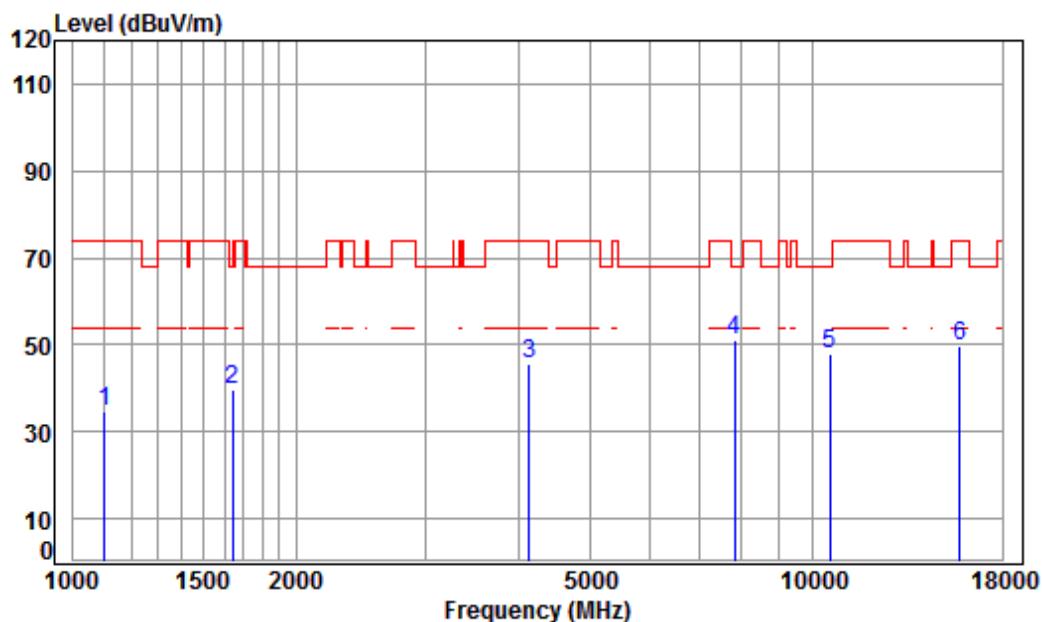

Condition: 3m VERTICAL

Job No : 0217RG

Mode : 5260 TX RSE

: Ant CDD 5G WIFI 11A CH52

		Cable	Ant	Preamp	Read	Limit	Over	
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1	1103.264	4.02	23.98	41.10	48.00	34.90	74.00	-39.10 peak
2	1644.019	5.30	26.44	41.50	49.33	39.57	68.20	-28.63 peak
3	4133.699	7.14	33.60	42.35	47.24	45.63	74.00	-28.37 peak
4 pp	7829.860	9.97	36.50	40.31	45.06	51.22	68.20	-16.98 peak
5	10520.000	11.30	37.12	37.56	36.83	47.69	68.20	-20.51 peak
6	15780.000	14.66	41.29	39.22	33.20	49.93	74.00	-24.07 peak




SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch

Report No.: SZEM180200138802

Page: 359 of 817

Test mode:	802.11a	Frequency(MHz):	5260	Peak	Horizontal
------------	---------	-----------------	------	------	------------

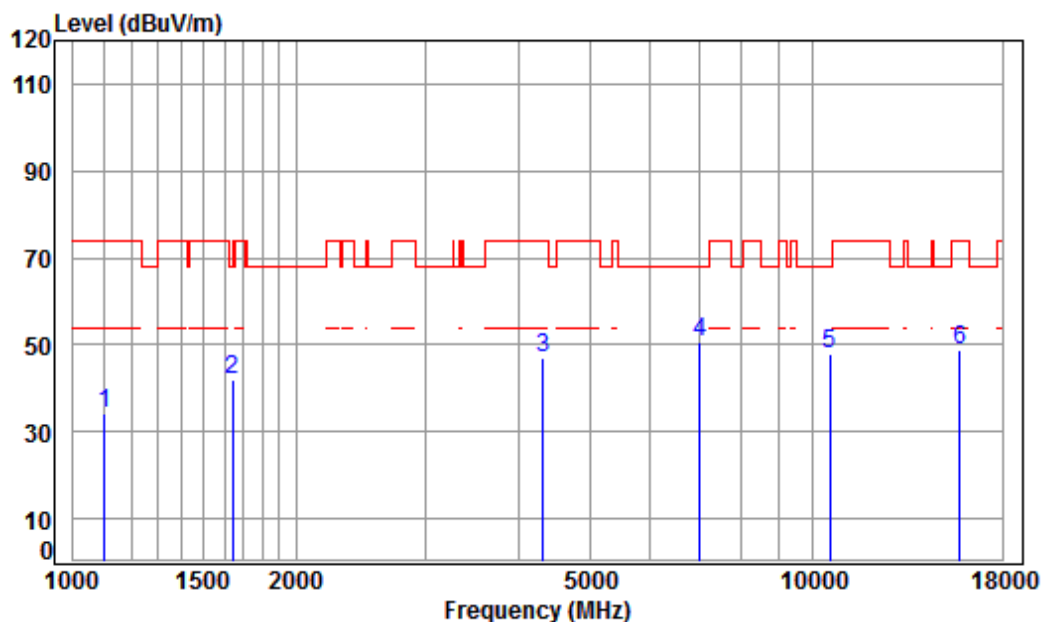

Condition: 3m HORIZONTAL

Job No : 0217RG

Mode : 5260 TX RSE

: Ant CDD 5G WIFI 11A CH52

		Cable	Ant	Preamp	Read	Limit	Over	
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1	1103.264	4.02	23.98	41.10	47.53	34.43	74.00	-39.57 peak
2	1644.019	5.30	26.44	41.50	51.77	42.01	68.20	-26.19 peak
3	4316.859	7.36	33.60	42.38	48.49	47.07	74.00	-26.93 peak
4 pp	7035.727	10.12	36.49	40.83	44.76	50.54	68.20	-17.66 peak
5	10520.000	11.30	37.12	37.56	37.03	47.89	68.20	-20.31 peak
6	15780.000	14.66	41.29	39.22	32.04	48.77	74.00	-25.23 peak




SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch

Report No.: SZEM180200138802

Page: 360 of 817

Test mode:	802.11a	Frequency(MHz):	5300	Peak	Vertical
------------	---------	-----------------	------	------	----------

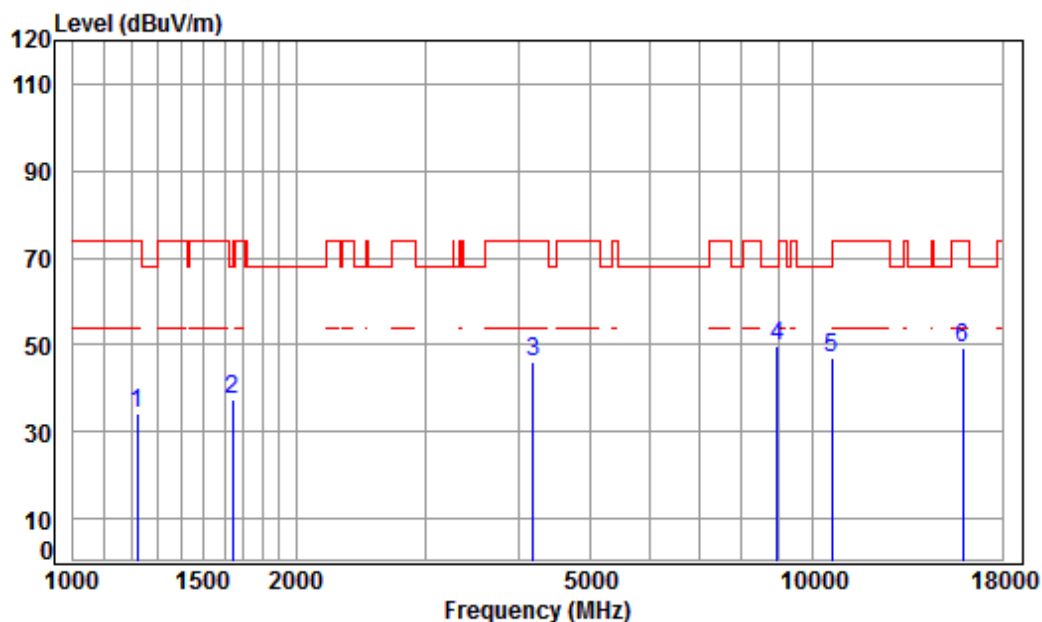

Condition: 3m VERTICAL

Job No : 0217RG

Mode : 5300 TX RSE

: Ant CDD 5G WIFI 11A CH60

		Cable	Ant	Preamp	Read	Limit	Over	
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1	1220.714	4.50	24.58	41.20	46.36	34.24	74.00	-39.76 peak
2	1644.019	5.30	26.44	41.50	47.04	37.28	68.20	-30.92 peak
3	4181.768	7.20	33.60	42.36	47.79	46.23	74.00	-27.77 peak
4 pp	8943.274	10.39	36.53	38.70	41.48	49.70	68.20	-18.50 peak
5	10600.000	11.36	37.22	37.62	36.13	47.09	68.20	-21.11 peak
6	15900.000	14.84	41.24	39.33	32.31	49.06	74.00	-24.94 peak




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM180200138802

Page: 361 of 817

Test mode:	802.11a	Frequency(MHz):	5300	Peak	Horizontal
------------	---------	-----------------	------	------	------------

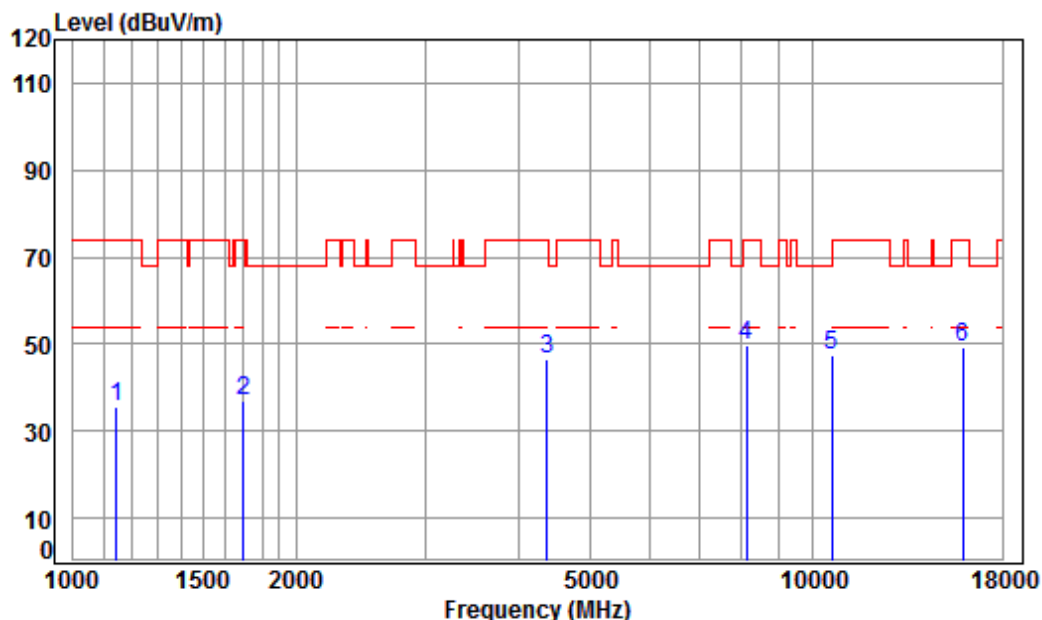

Condition: 3m HORIZONTAL

Job No : 0217RG

Mode : 5300 TX RSE

: Ant CDD 5G WIFI 11A CH60

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit	Over	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1145.507	4.20	24.20	41.14	48.16	35.42	74.00	-38.58	peak
2	1697.129	5.23	26.66	41.53	46.42	36.78	74.00	-37.22	peak
3	4367.058	7.41	33.60	42.39	48.10	46.72	74.00	-27.28	peak
4	8129.664	10.03	36.44	39.98	43.33	49.82	74.00	-24.18	peak
5	pp10600.000	11.36	37.22	37.62	36.27	47.23	68.20	-20.97	peak
6	15900.000	14.84	41.24	39.33	32.42	49.17	74.00	-24.83	peak




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM180200138802

Page: 362 of 817

Test mode:	802.11a	Frequency(MHz):	5320	Peak	Vertical
------------	---------	-----------------	------	------	----------

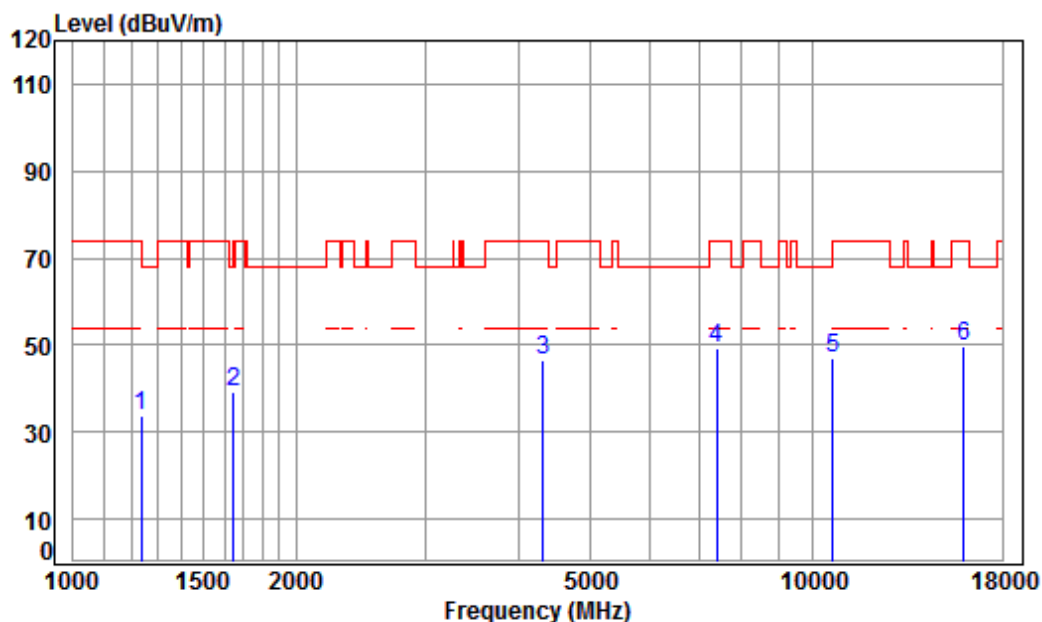

Condition: 3m VERTICAL

Job No : 0217RG

Mode : 5320 TX RSE

: Ant CDD 5G WIFI 11A CH64

		Cable	Ant	Preamp	Read		Limit	Over	
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1234.909	4.55	24.65	41.21	45.80	33.79	74.00	-40.21	peak
2	1648.778	5.29	26.46	41.50	49.12	39.37	68.20	-28.83	peak
3	4316.859	7.36	33.60	42.38	47.97	46.55	74.00	-27.45	peak
4	7411.461	10.02	36.33	40.57	43.62	49.40	74.00	-24.60	peak
5	10640.000	11.39	37.27	37.64	35.95	46.97	74.00	-27.03	peak
6	pp15960.000	14.93	41.22	39.38	32.83	49.60	74.00	-24.40	peak




SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch

Report No.: SZEM180200138802

Page: 363 of 817

Test mode:	802.11a	Frequency(MHz):	5320	Peak	Horizontal
------------	---------	-----------------	------	------	------------

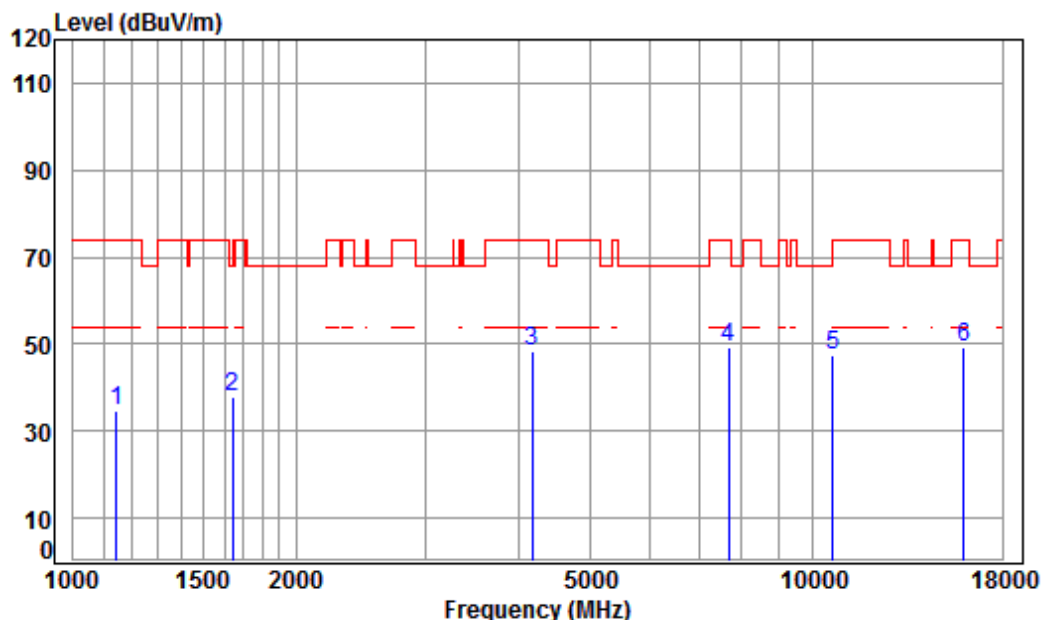

Condition: 3m HORIZONTAL

Job No : 0217RG

Mode : 5320 TX RSE

: Ant CDD 5G WIFI 11A CH64

		Cable	Ant	Preamp	Read		Limit	Over	
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1145.507	4.20	24.20	41.14	47.27	34.53	74.00	-39.47	peak
2	1644.019	5.30	26.44	41.50	47.72	37.96	68.20	-30.24	peak
3	4169.698	7.18	33.60	42.36	50.00	48.42	74.00	-25.58	peak
4	pp 7695.244	9.98	36.42	40.39	43.44	49.45	74.00	-24.55	peak
5	10640.000	11.39	37.27	37.64	36.36	47.38	74.00	-26.62	peak
6	15960.000	14.93	41.22	39.38	32.57	49.34	74.00	-24.66	peak




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM180200138802

Page: 364 of 817

Test mode:	802.11a	Frequency(MHz):	5500	Peak	Vertical
------------	---------	-----------------	------	------	----------

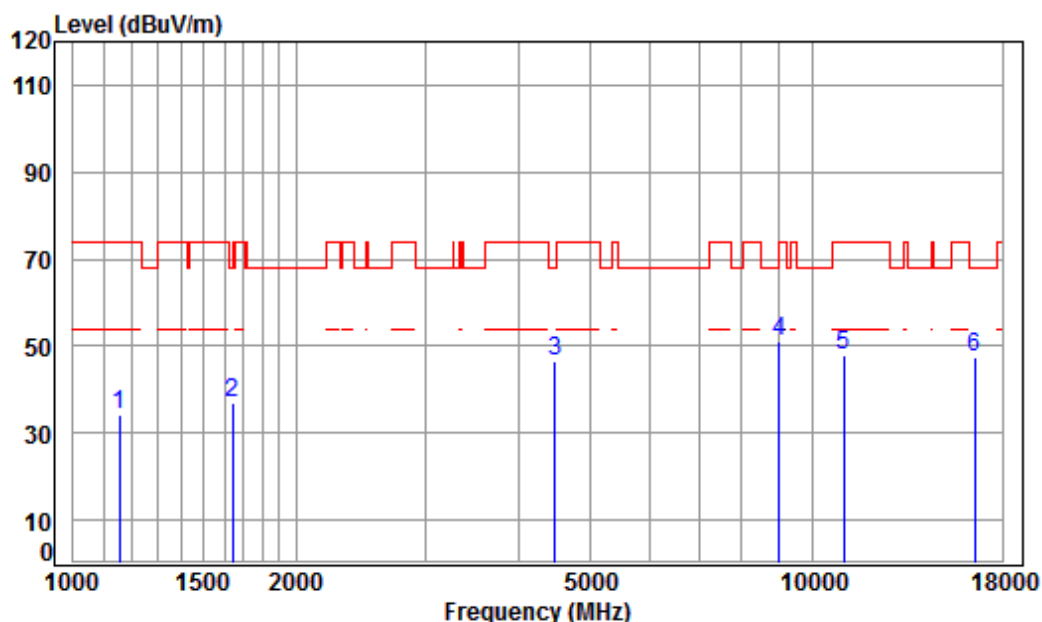

Condition: 3m VERTICAL

Job No : 0217RG

Mode : 5500 TX RSE

: Ant CDD 5G WIFI 11A CH100

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit	Over	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1155.483	4.24	24.26	41.14	46.66	34.02	74.00	-39.98	peak
2	1644.019	5.30	26.44	41.50	46.90	37.14	68.20	-31.06	peak
3	4482.150	7.54	33.60	42.41	47.98	46.71	68.20	-21.49	peak
4 pp	8995.123	10.40	36.59	38.62	42.94	51.31	68.20	-16.89	peak
5	11000.000	11.63	37.70	37.88	36.68	48.13	74.00	-25.87	peak
6	16500.000	14.50	42.70	39.86	30.07	47.41	68.20	-20.79	peak




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM180200138802

Page: 365 of 817

Test mode:	802.11a	Frequency(MHz):	5500	Peak	Horizontal
------------	---------	-----------------	------	------	------------

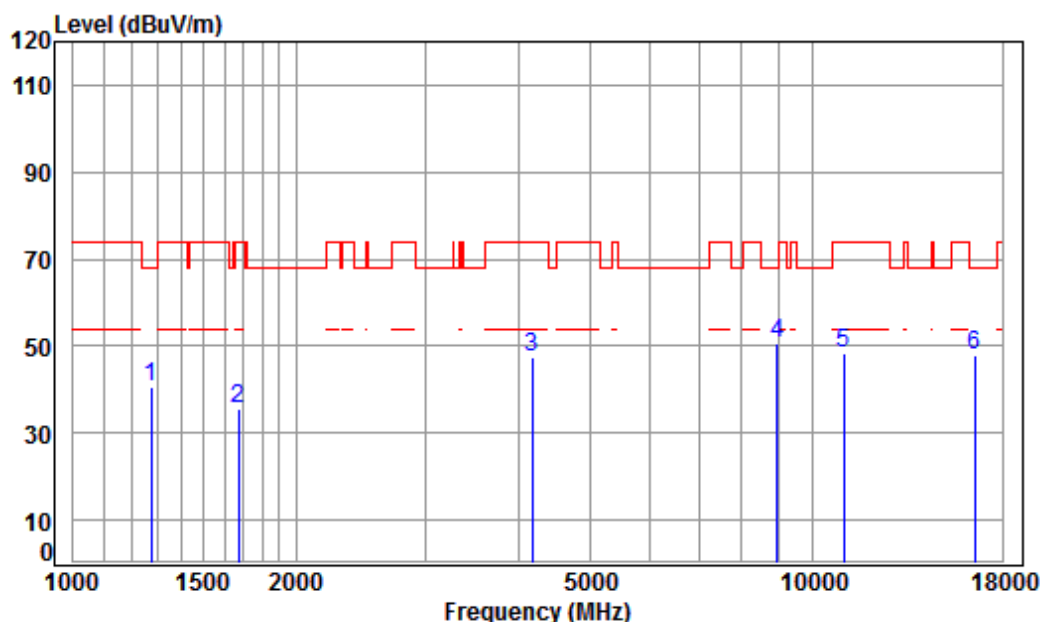

Condition: 3m HORIZONTAL

Job No : 0217RG

Mode : 5500 TX RSE

: Ant CDD 5G WIFI 11A CH100

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit	Over	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1274.802	4.71	24.84	41.24	52.08	40.39	68.20	-27.81	peak
2	1672.779	5.26	26.56	41.52	45.51	35.81	74.00	-38.19	peak
3	4169.698	7.18	33.60	42.36	49.16	47.58	74.00	-26.42	peak
4 pp	8943.274	10.39	36.53	38.70	42.65	50.87	68.20	-17.33	peak
5	11000.000	11.63	37.70	37.88	36.93	48.38	74.00	-25.62	peak
6	16500.000	14.50	42.70	39.86	30.71	48.05	68.20	-20.15	peak




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM180200138802

Page: 366 of 817

Test mode:	802.11a	Frequency(MHz):	5580	Peak	Vertical
------------	---------	-----------------	------	------	----------

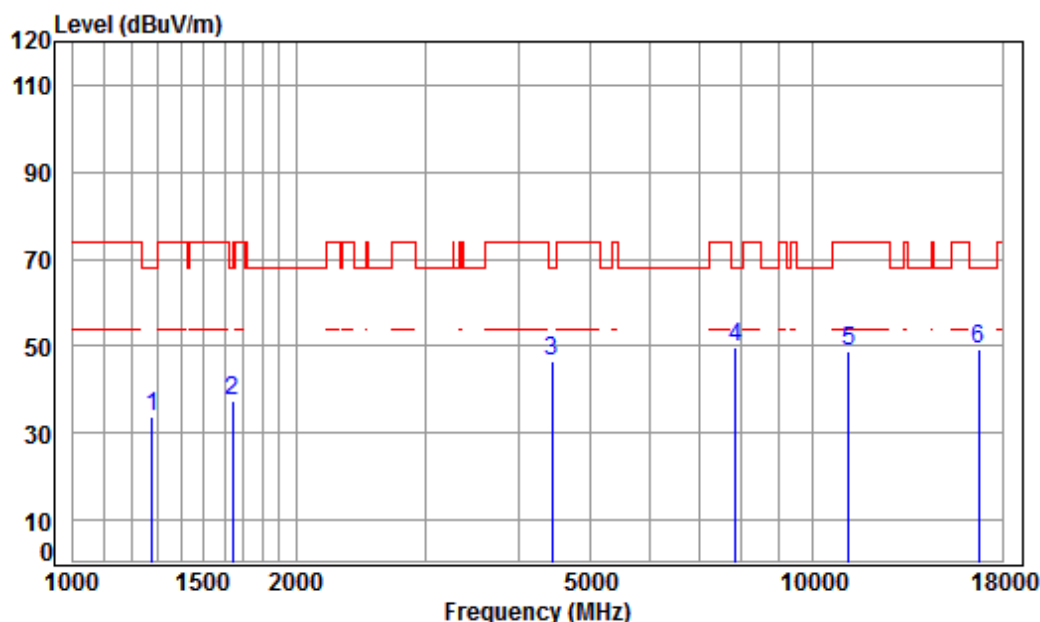

Condition: 3m VERTICAL

Job No : 0217RG

Mode : 5580 TX RSE

: Ant CDD 5G WIFI 11A CH116

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit	Over	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1278.492	4.72	24.85	41.25	45.65	33.97	68.20	-34.23	peak
2	1644.019	5.30	26.44	41.50	47.25	37.49	68.20	-30.71	peak
3	4430.628	7.48	33.60	42.41	47.74	46.41	68.20	-21.79	peak
4 pp	7852.524	9.96	36.51	40.29	43.65	49.83	68.20	-18.37	peak
5	11160.000	11.80	37.83	37.98	37.39	49.04	74.00	-24.96	peak
6	16740.000	15.57	42.75	40.07	30.99	49.24	68.20	-18.96	peak




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM180200138802

Page: 367 of 817

Test mode:	802.11a	Frequency(MHz):	5580	Peak	Horizontal
------------	---------	-----------------	------	------	------------

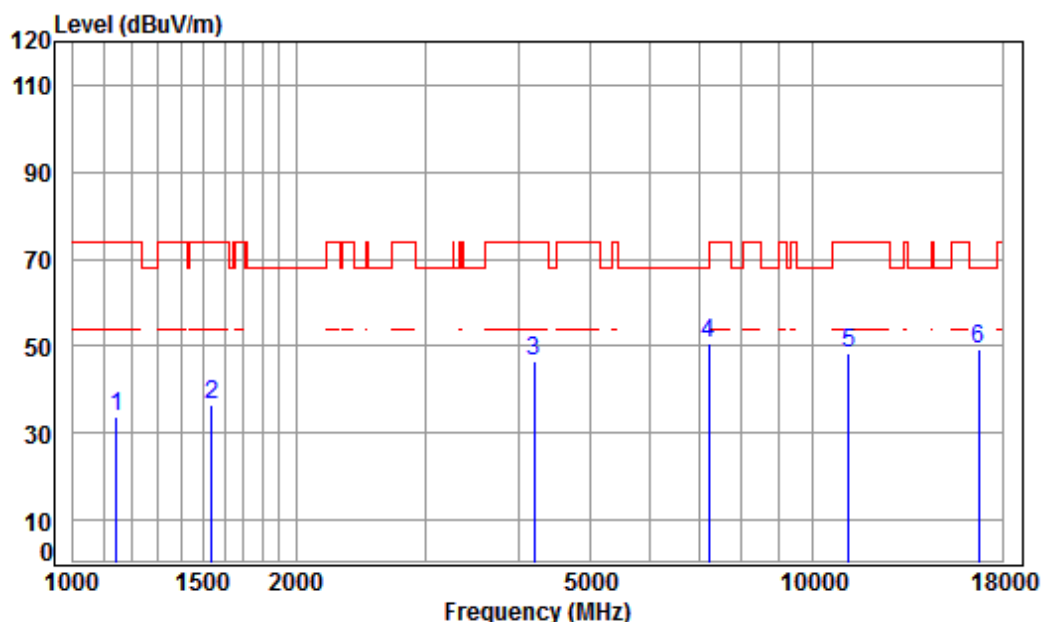

Condition: 3m HORIZONTAL

Job No : 0217RG

Mode : 5580 TX RSE

: Ant CDD 5G WIFI 11A CH116

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit	Over	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1145.507	4.20	24.20	41.14	46.47	33.73	74.00	-40.27	peak
2	1538.281	5.43	25.98	41.43	46.70	36.68	74.00	-37.32	peak
3	4193.872	7.21	33.60	42.36	48.04	46.49	74.00	-27.51	peak
4 pp	7221.150	10.07	36.41	40.70	44.87	50.65	68.20	-17.55	peak
5	11160.000	11.80	37.83	37.98	36.77	48.42	74.00	-25.58	peak
6	16740.000	15.57	42.75	40.07	31.14	49.39	68.20	-18.81	peak




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM180200138802

Page: 368 of 817

Test mode:	802.11a	Frequency(MHz):	5700	Peak	Vertical
------------	---------	-----------------	------	------	----------

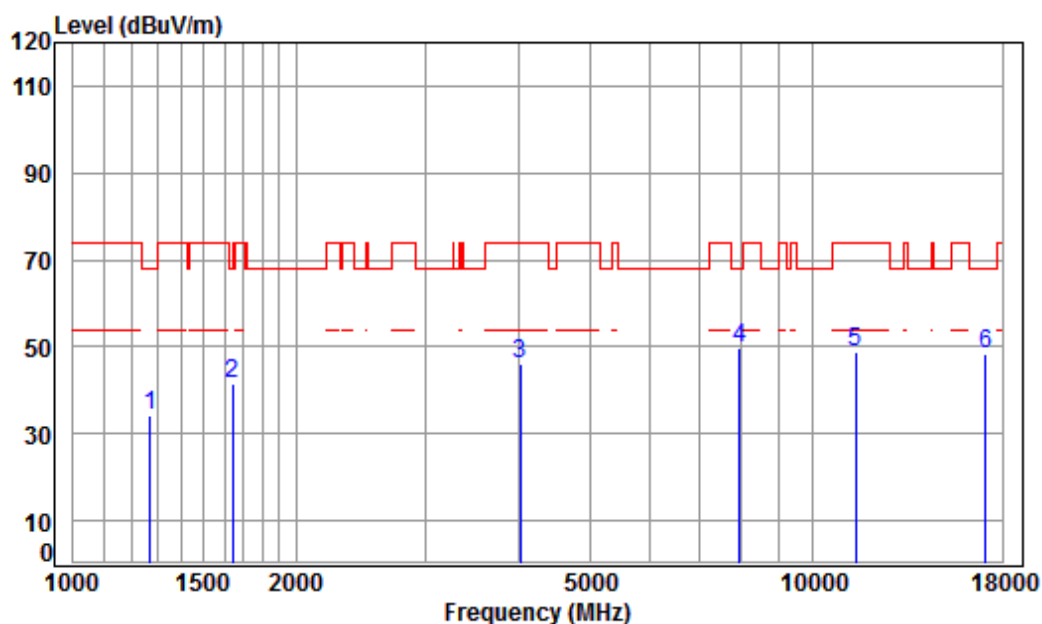

Condition: 3m VERTICAL

Job No : 0217RG

Mode : 5700 TX RSE

: Ant CDD 5G WIFI 11A CH140

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit	Over	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1271.123	4.69	24.82	41.24	45.89	34.16	68.20	-34.04	peak
2	1644.019	5.30	26.44	41.50	51.39	41.63	68.20	-26.57	peak
3	4015.929	7.00	33.60	42.33	48.00	46.27	74.00	-27.73	peak
4 pp	7943.838	9.96	36.57	40.23	43.49	49.79	68.20	-18.41	peak
5	11400.000	12.04	38.02	38.13	36.92	48.85	74.00	-25.15	peak
6	17100.000	16.49	42.92	40.37	29.28	48.32	68.20	-19.88	peak




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM180200138802

Page: 369 of 817

Test mode:	802.11a	Frequency(MHz):	5700	Peak	Horizontal
------------	---------	-----------------	------	------	------------

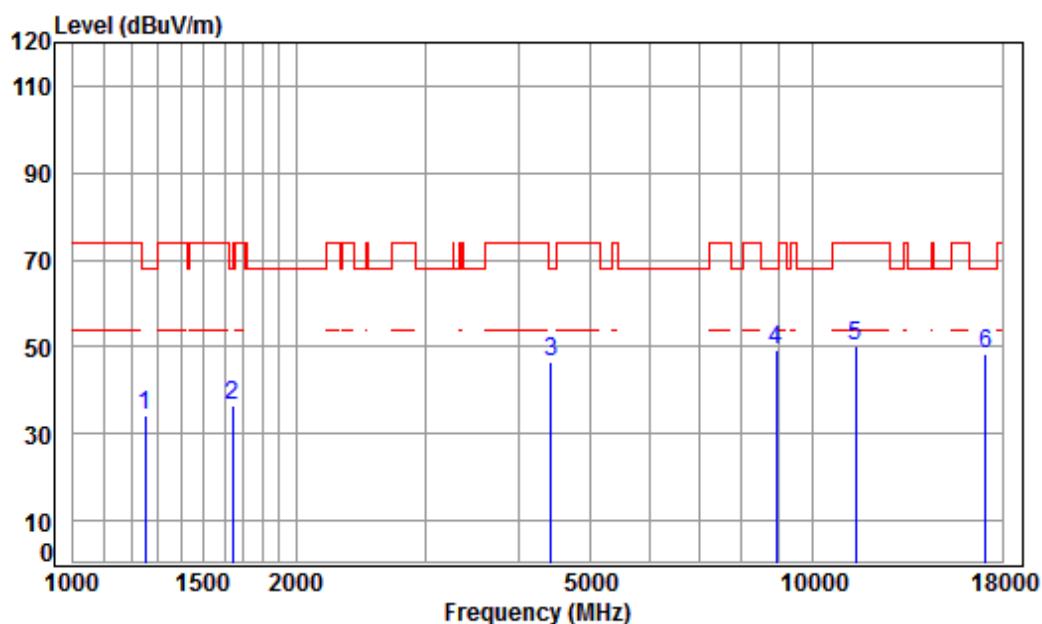

Condition: 3m HORIZONTAL

Job No : 0217RG

Mode : 5700 TX RSE

: Ant CDD 5G WIFI 11A CH140

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit	Over	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1252.885	4.62	24.73	41.23	46.13	34.25	68.20	-33.95	peak
2	1644.019	5.30	26.44	41.50	46.24	36.48	68.20	-31.72	peak
3	4417.841	7.47	33.60	42.40	47.72	46.39	68.20	-21.81	peak
4 pp	8917.462	10.38	36.50	38.74	41.35	49.49	68.20	-18.71	peak
5	11400.000	12.04	38.02	38.13	38.30	50.23	74.00	-23.77	peak
6	17100.000	16.49	42.92	40.37	29.53	48.57	68.20	-19.63	peak




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM180200138802

Page: 370 of 817

Test mode:	802.11a	Frequency(MHz):	5745	Peak	Vertical
------------	---------	-----------------	------	------	----------

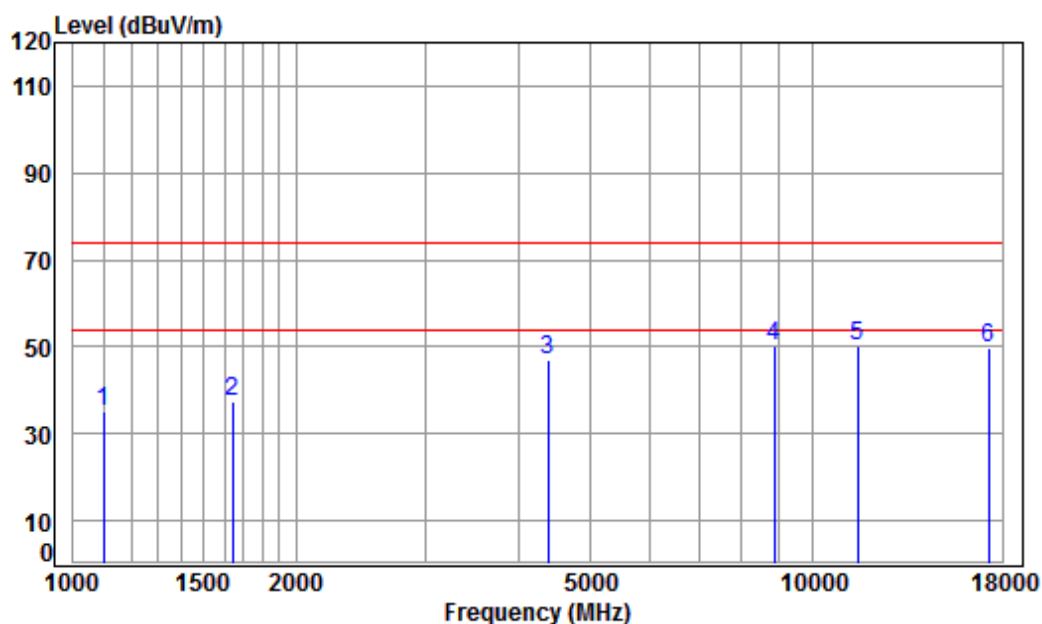

Condition: 3m VERTICAL

Job No : 0217RG

Mode : 5745 TX RSE

: Ant CDD 5G WIFI 11A CH149

	Freq	Cable Loss	Ant Factor	Preamplifier Factor	Read Level	Limit Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1100.079	4.00	23.96	41.10	48.39	35.25	74.00	-38.75	peak
2	1644.019	5.30	26.44	41.50	47.29	37.53	74.00	-36.47	peak
3	4379.699	7.43	33.60	42.40	48.14	46.77	74.00	-27.23	peak
4	8866.062	10.37	36.44	38.82	42.23	50.22	74.00	-23.78	peak
5	11490.000	12.13	38.09	38.19	38.23	50.26	74.00	-23.74	peak
6	17235.000	16.18	43.08	40.48	30.87	49.65	74.00	-24.35	peak




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM180200138802

Page: 371 of 817

Test mode:	802.11a	Frequency(MHz):	5745	Peak	Horizontal
------------	---------	-----------------	------	------	------------

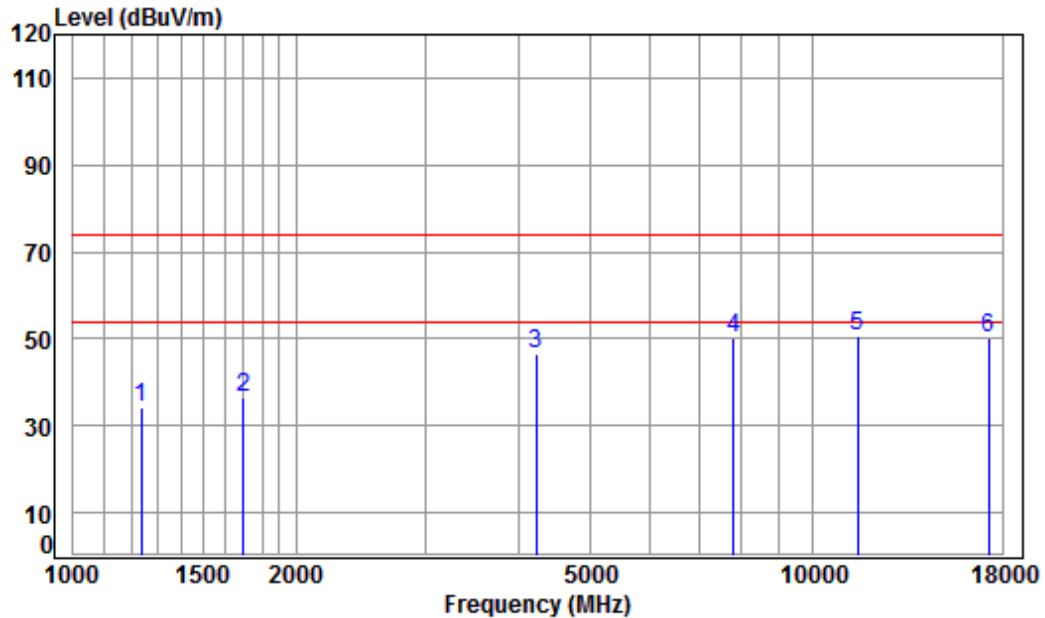

Condition: 3m HORIZONTAL

Job No : 0217RG

Mode : 5745 TX RSE

: Ant CDD 5G WIFI 11A CH149

	Freq	Cable Loss	Ant Factor	Preamplifier Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1234.909	4.55	24.65	41.21	46.44	34.43	74.00	-39.57	peak
2	1697.129	5.23	26.66	41.53	46.04	36.40	74.00	-37.60	peak
3	4218.186	7.24	33.60	42.37	47.99	46.46	74.00	-27.54	peak
4	7807.262	9.97	36.49	40.32	44.13	50.27	74.00	-23.73	peak
5	11490.000	12.13	38.09	38.19	38.53	50.56	74.00	-23.44	peak
6	17235.000	16.18	43.08	40.48	31.30	50.08	74.00	-23.92	peak




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM180200138802

Page: 372 of 817

Test mode:	802.11a	Frequency(MHz):	5785	Peak	Vertical
------------	---------	-----------------	------	------	----------

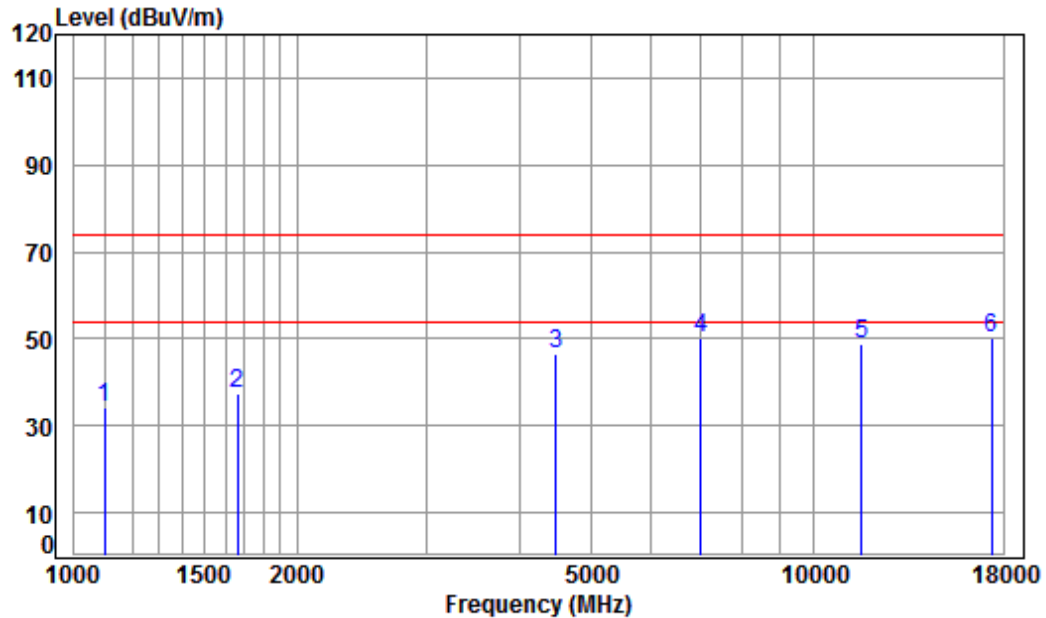

Condition: 3m VERTICAL

Job No : 0217RG

Mode : 5785 TX RSE

: Ant CDD 5G WIFI 11A CH157

	Freq	Cable Loss	Ant Factor	Preamplifier Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1100.079	4.00	23.96	41.10	47.57	34.43	74.00	-39.57	peak
2	1663.137	5.27	26.52	41.51	47.36	37.64	74.00	-36.36	peak
3	4482.150	7.54	33.60	42.41	47.68	46.41	74.00	-27.59	peak
4 pp	7035.727	10.12	36.49	40.83	44.33	50.11	74.00	-23.89	peak
5	11570.000	12.17	38.17	38.24	36.66	48.76	74.00	-25.24	peak
6	17355.000	15.92	43.23	40.58	31.42	49.99	74.00	-24.01	peak




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM180200138802

Page: 373 of 817

Test mode:	802.11a	Frequency(MHz):	5785	Peak	Horizontal
------------	---------	-----------------	------	------	------------

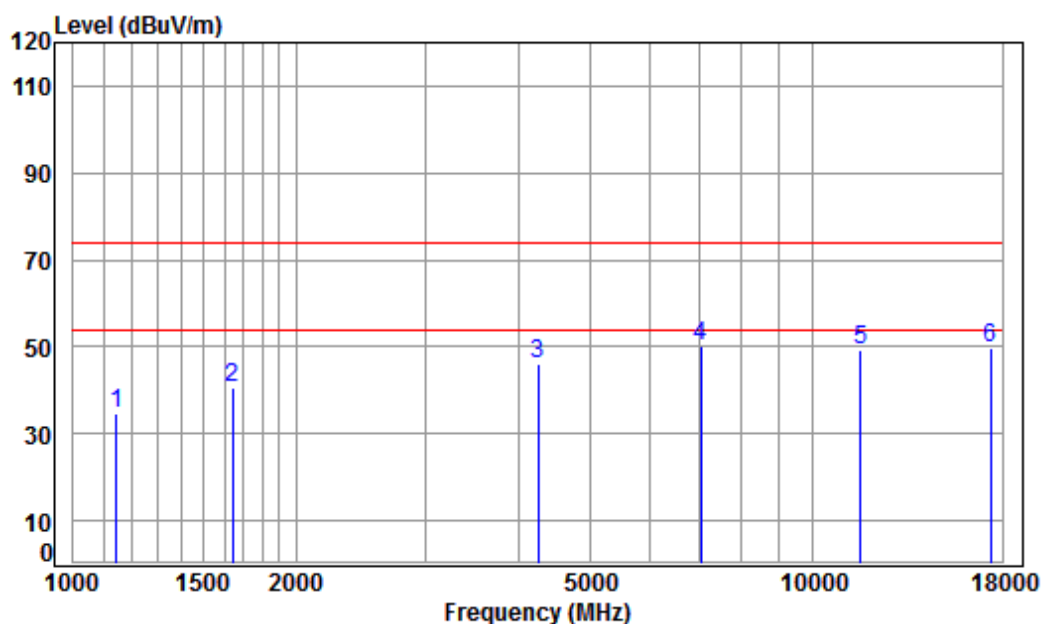

Condition: 3m HORIZONTAL

Job No : 0217RG

Mode : 5785 TX RSE

: Ant CDD 5G WIFI 11A CH157

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1145.507	4.20	24.20	41.14	47.38	34.64	74.00	-39.36	peak
2	1644.019	5.30	26.44	41.50	50.50	40.74	74.00	-33.26	peak
3	4254.921	7.28	33.60	42.37	47.68	46.19	74.00	-27.81	peak
4 pp	7056.092	10.11	36.48	40.81	44.21	49.99	74.00	-24.01	peak
5	11570.000	12.17	38.17	38.24	37.20	49.30	74.00	-24.70	peak
6	17355.000	15.92	43.23	40.58	31.39	49.96	74.00	-24.04	peak




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM180200138802

Page: 374 of 817

Test mode:	802.11a	Frequency(MHz):	5825	Peak	Vertical
------------	---------	-----------------	------	------	----------

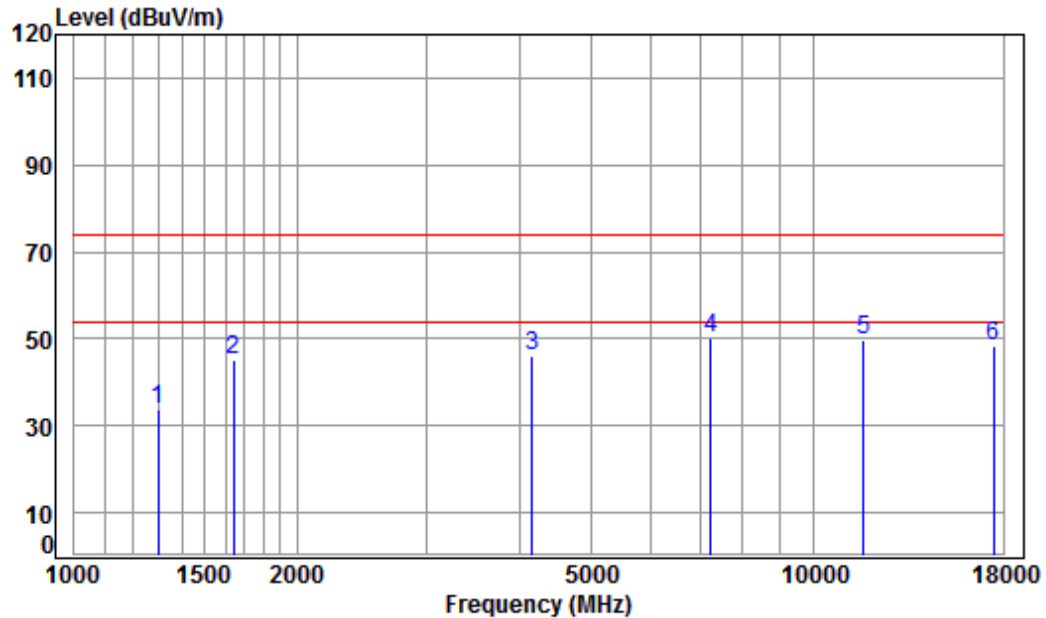

Condition: 3m VERTICAL

Job No : 0217RG

Mode : 5825 TX RSE

: Ant CDD 5G WIFI 11A CH165

	Freq	Cable Loss	Ant Factor	Preamplifier Factor	Read Level	Level	Limit	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1297.103	4.79	24.94	41.26	45.45	33.92	74.00	-40.08	peak
2	1644.019	5.30	26.44	41.50	55.12	45.36	74.00	-28.64	peak
3	4157.664	7.17	33.60	42.36	47.47	45.88	74.00	-28.12	peak
4 pp	7242.052	10.07	36.40	40.69	44.58	50.36	74.00	-23.64	peak
5	11650.000	12.20	38.25	38.29	37.39	49.55	74.00	-24.45	peak
6	17475.000	15.65	43.37	40.68	30.14	48.48	74.00	-25.52	peak




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM180200138802

Page: 375 of 817

Test mode:	802.11a	Frequency(MHz):	5825	Peak	Horizontal
------------	---------	-----------------	------	------	------------

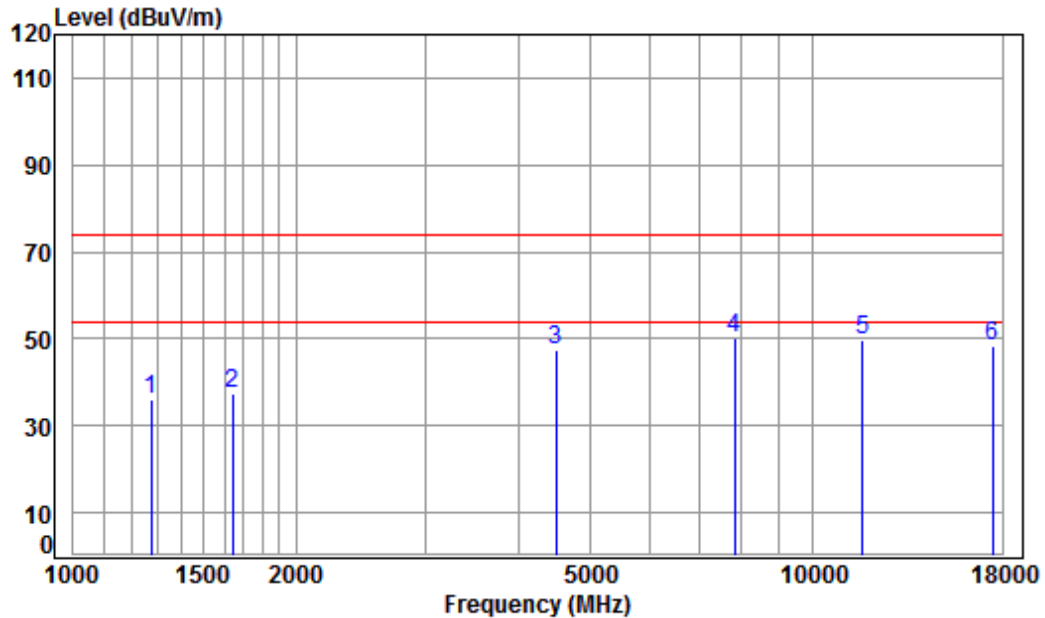

Condition: 3m HORIZONTAL

Job No : 0217RG

Mode : 5825 TX RSE

: Ant CDD 5G WIFI 11A CH165

	Freq	Cable Loss	Ant Factor	Preamplifier Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1274.802	4.71	24.84	41.24	47.52	35.83	74.00	-38.17	peak
2	1644.019	5.30	26.44	41.50	47.36	37.60	74.00	-36.40	peak
3	4495.125	7.55	33.60	42.42	48.87	47.60	74.00	-26.40	peak
4 pp	7829.860	9.97	36.50	40.31	43.89	50.05	74.00	-23.95	peak
5	11650.000	12.20	38.25	38.29	37.47	49.63	74.00	-24.37	peak
6	17475.000	15.65	43.37	40.68	29.99	48.33	74.00	-25.67	peak



SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM180200138802

Page: 376 of 817

Remark:

1) The field strength is calculated by adding the Antenna Factor, Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows:


Final Test Level = Receiver Reading + Antenna Factor + Cable Factor – Preamplifier Factor

2) Scan from 9kHz to 25GHz, The disturbance above 13GHz and below 30MHz was very low, and the above harmonics were the highest point could be found when testing, so only the above harmonics had been displayed. The amplitude of spurious emissions from the radiator which are attenuated more than 20dB below the limit need not be reported .

3) As shown in this section, for frequencies above 1GHz, the field strength limits are based on average limits. However, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation. So, only the peak measurements were shown in the report.

6.4 Restricted bands around fundamental frequency

Test Requirement:	47 CFR Part 15 Section 15.407(b)		
Test Method:	ANSI C63.10: 2013		
Test Site:	Measurement Distance: 3m (Semi-Anechoic Chamber)		
Limit:	Frequency	Limit (dBuV/m @3m)	Remark
	30MHz-88MHz	40.0	Quasi-peak Value
	88MHz-216MHz	43.5	Quasi-peak Value
	216MHz-960MHz	46.0	Quasi-peak Value
	960MHz-1GHz	54.0	Quasi-peak Value
	Above 1GHz	54.0	Average Value
		74.0	Peak Value
Test Setup:			

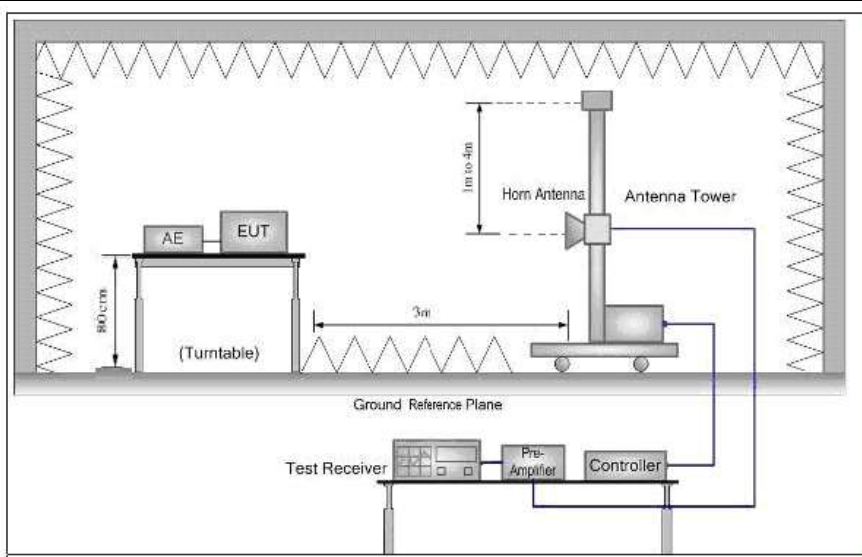



SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM180200138802

Page: 378 of 817

Test Procedure:	a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation. b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower. c. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement. d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading. e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode. f. Place a marker at the end of the restricted band closest to the transmit frequency to show compliance. Also measure any emissions in the restricted bands. Save the spectrum analyzer plot. Repeat for each power and modulation for lowest and highest channel g. Test the EUT in the outermost channels. h. The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, And found the X axis positioning which it is worse case. i. Repeat above procedures until all frequencies measured was complete.
Exploratory Test Mode:	Transmitting with all kind of modulations, data rates.
Final Test Mode:	Through Pre-scan, find the 6Mbps of rate is the worst case of 802.11a; MCS0 of rate is the worst case of 802.11n(HT20); MCS0 of rate is the worst case of 802.11n(HT40); MCS0 of rate is the worst case of 802.11ac(HT20); MCS0 of rate is the worst case of 802.11ac(HT40); MCS0 of rate is the worst case of 802.11ac(HT80). Only the worst case is recorded in the report.
Instruments Used:	Refer to section 5.10 for details
Test Results:	Pass



SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch


Report No.: SZEM180200138802

Page: 379 of 817

Test plot as follows:

ANT1

Test mode:	802.11a	Frequency(MHz):	5180	Peak	Vertical
------------	---------	-----------------	------	------	----------

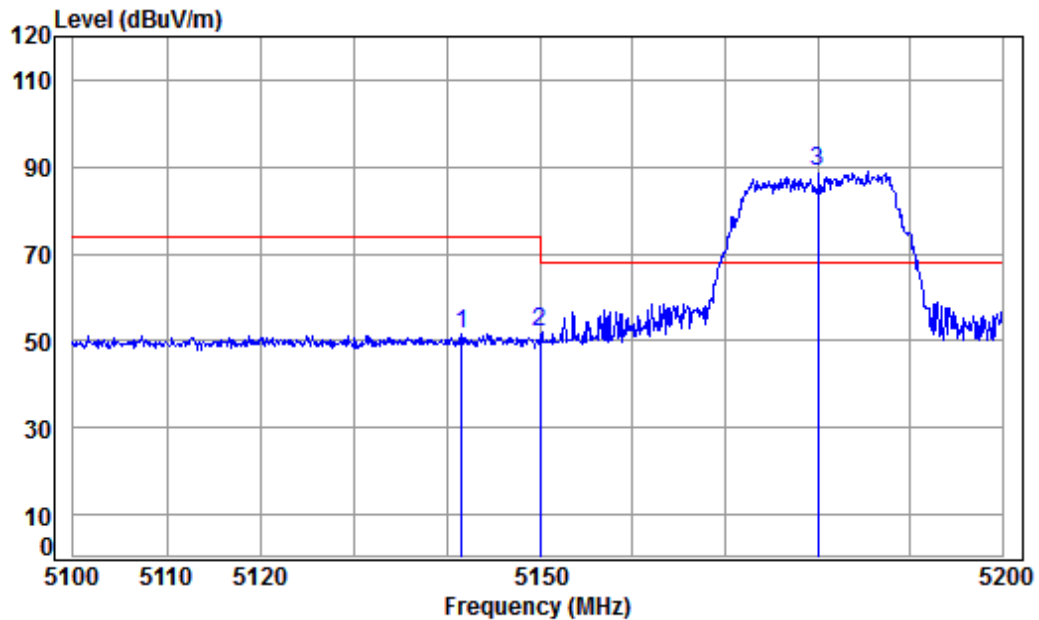

Condition: 3m VERTICAL

Job No : 0217RG

Mode : 5180 Band edge

: Ant 1 5G WIFI 11A CH36

		Cable	Ant	Preamp	Read		Limit	Over	
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	5141.564	8.31	34.47	38.18	46.84	51.44	74.00	-22.56	Peak
2	5149.980	8.33	34.47	38.18	47.29	51.91	74.00	-22.09	Peak
3 pp	5180.000	8.37	34.46	38.18	84.18	88.83	68.20	20.63	Peak




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM180200138802

Page: 380 of 817

Test mode:	802.11a	Frequency(MHz):	5180	Average	Vertical
------------	---------	-----------------	------	---------	----------

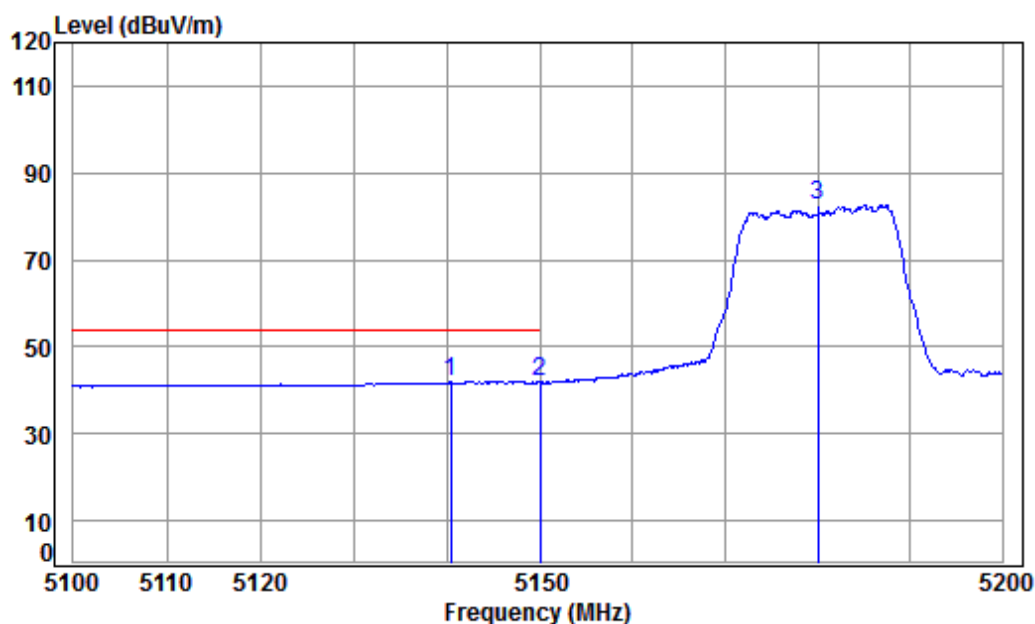

Condition: 3m VERTICAL

Job No : 0217RG

Mode : 5180 Band edge

: Ant 1 5G WIFI 11A CH36

		Cable	Ant	Preamp	Read	Limit	Over	
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1 pp	5140.466	8.31	34.47	38.18	37.40	42.00	54.00	-12.00 Average
2	5149.980	8.33	34.47	38.18	37.22	41.84	54.00	-12.16 Average
3	5180.000	8.37	34.46	38.18	77.81	82.46	-----	----- Average




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM180200138802

Page: 381 of 817

Test mode:	802.11a	Frequency(MHz):	5180	Peak	Horizontal
------------	---------	-----------------	------	------	------------

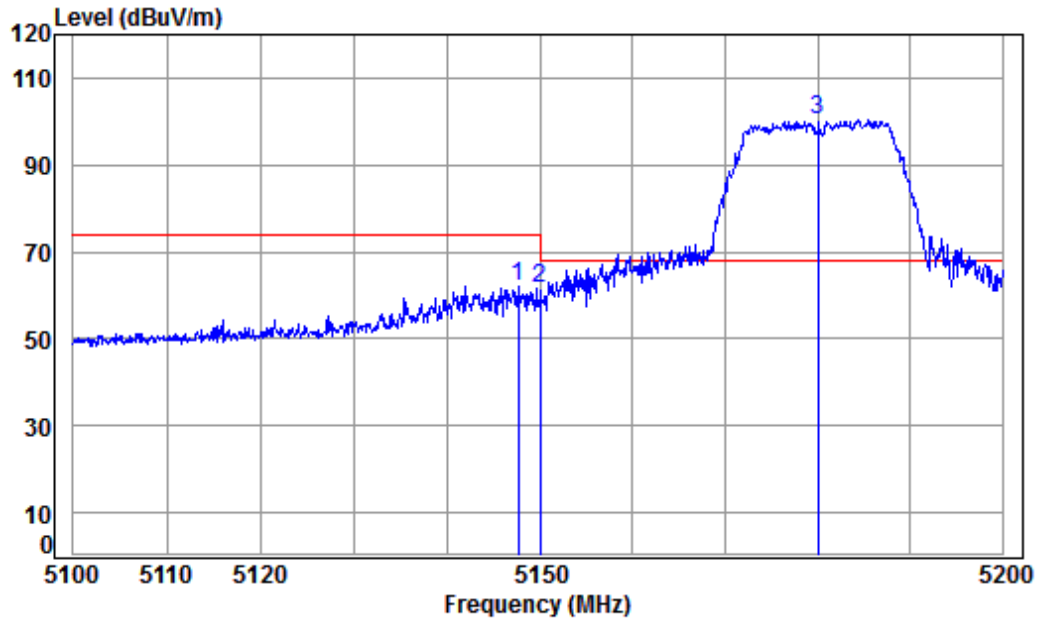

Condition: 3m HORIZONTAL

Job No : 0217RG

Mode : 5180 Band edge

: Ant 1 5G WIFI 11A CH36

	Freq	Cable Loss	Ant Factor	Preamplifier Factor	Read Level	Limit Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	5147.658	8.32	34.47	38.18	57.57	62.18	74.00	-11.82	peak
2	5149.980	8.33	34.47	38.18	57.12	61.74	74.00	-12.26	peak
3 pp	5180.000	8.37	34.46	38.18	95.79	100.44	68.20	32.24	peak




SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch

Report No.: SZEM180200138802

Page: 382 of 817

Test mode:	802.11a	Frequency(MHz):	5180	Average	Horizontal
------------	---------	-----------------	------	---------	------------

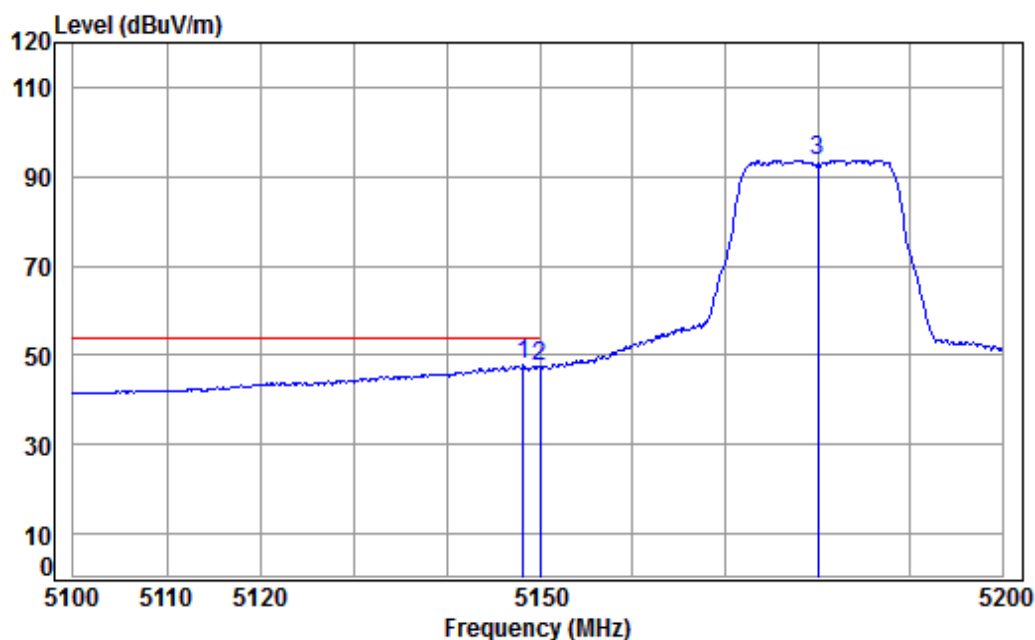

Condition: 3m HORIZONTAL

Job No : 0217RG

Mode : 5180 Band edge

: Ant 1 5G WIFI 11A CH36

		Cable	Ant	Preamp	Read	Limit	Over	
Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1 pp 5148.158	8.32	34.47	38.18	43.08	47.69	54.00	-6.31	Average
2 5149.980	8.33	34.47	38.18	42.93	47.55	54.00	-6.45	Average
3 5180.000	8.37	34.46	38.18	89.08	93.73	-----	-----	Average




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM180200138802

Page: 383 of 817

Test mode:	802.11a	Frequency(MHz):	5240	Peak	Vertical
------------	---------	-----------------	------	------	----------

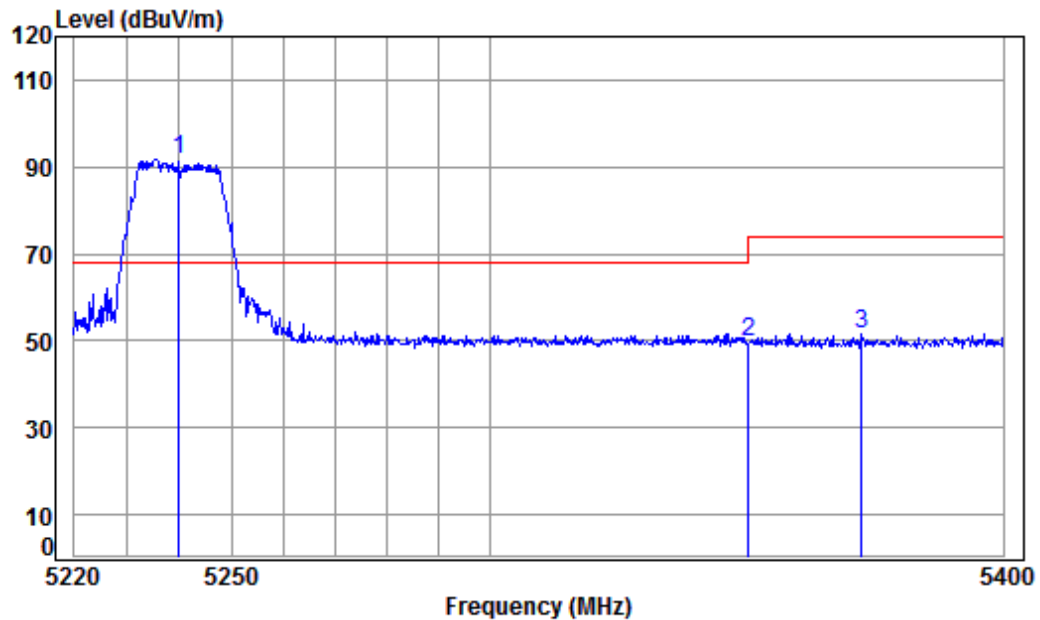

Condition: 3m VERTICAL

Job No : 0217RG

Mode : 5240 Band edge

: Ant 1 5G WIFI 11A CH48

		Cable	Ant	Preamp	Read	Limit	Over	
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1	pp 5240.000	8.46	34.45	38.45	87.28	91.74	68.20	23.54 Peak
2	5350.020	8.63	34.43	38.43	45.08	49.71	74.00	-24.29 Peak
3	5372.245	8.66	34.42	38.42	47.06	51.72	74.00	-22.28 Peak




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM180200138802

Page: 384 of 817

Test mode:	802.11a	Frequency(MHz):	5240	Average	Vertical
------------	---------	-----------------	------	---------	----------

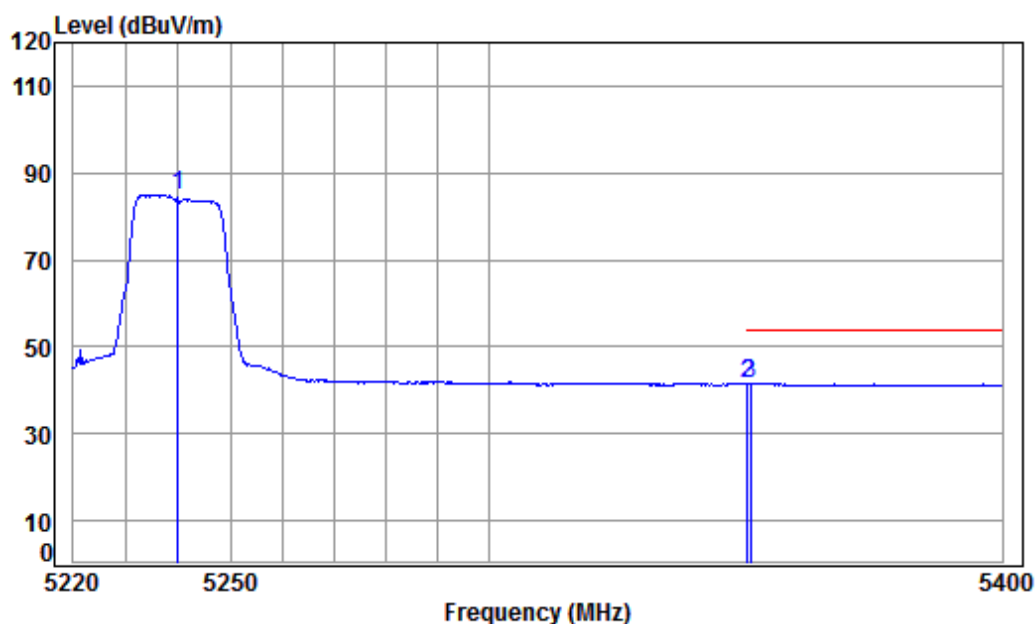

Condition: 3m VERTICAL

Job No : 0217RG

Mode : 5240 Band edge

: Ant 1 5G WIFI 11A CH48

	Freq	Cable Loss	Ant Factor	Preamplifier Factor	Read Level	Limit Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	5240.000	8.46	34.45	38.45	80.39	84.85	-----	-----	Average
2	5350.020	8.63	34.43	38.43	36.82	41.45	54.00	-12.55	Average
3 pp	5350.616	8.63	34.43	38.43	36.87	41.50	54.00	-12.50	Average




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM180200138802

Page: 385 of 817

Test mode:	802.11a	Frequency(MHz):	5240	Peak	Horizontal
------------	---------	-----------------	------	------	------------

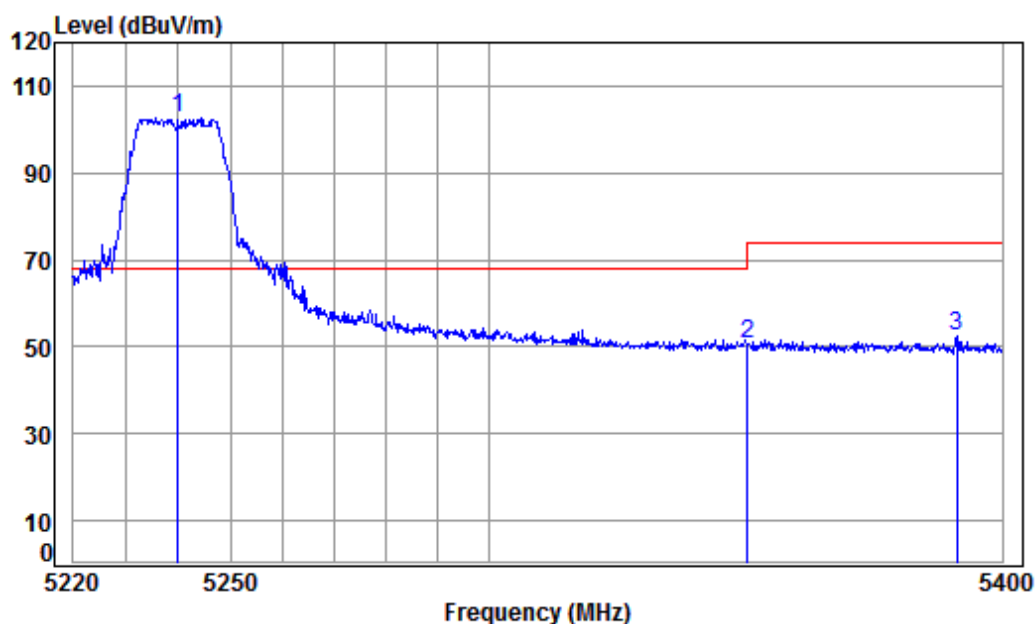

Condition: 3m HORIZONTAL

Job No : 0217RG

Mode : 5240 Band edge

: Ant 1 5G WIFI 11A CH48

	Freq	Cable Loss	Ant Factor	Preamplifier Factor	Read Level	Limit Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1 pp	5240.000	8.46	34.45	38.45	98.12	102.58	68.20	34.38	peak
2	5350.020	8.63	34.43	38.43	46.13	50.76	74.00	-23.24	peak
3	5391.037	8.69	34.42	38.42	47.64	52.33	74.00	-21.67	peak




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM180200138802

Page: 386 of 817

Test mode:	802.11a	Frequency(MHz):	5240	Average	Horizontal
------------	---------	-----------------	------	---------	------------

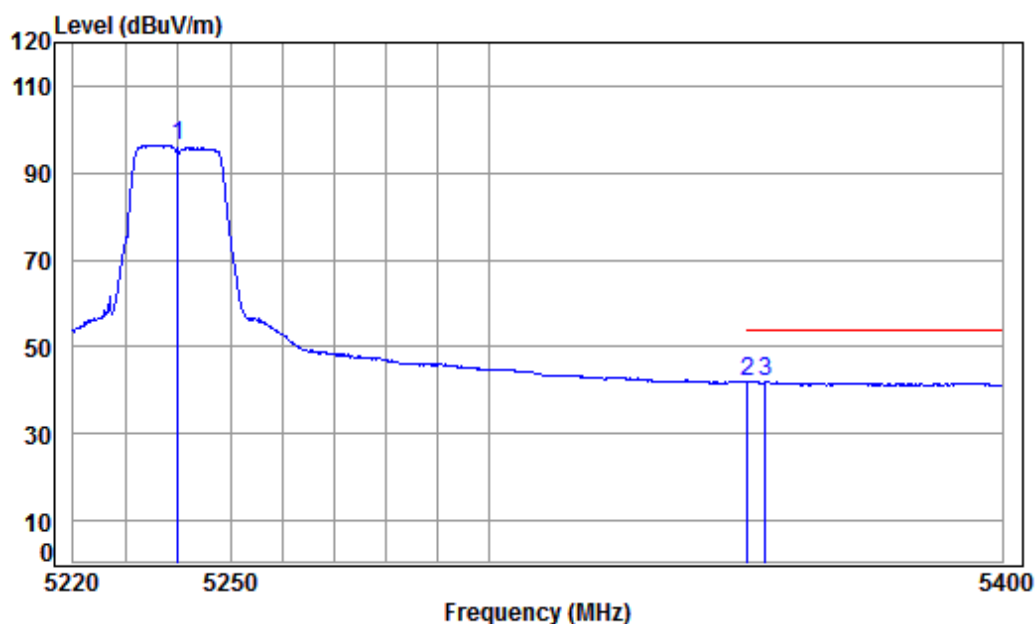

Condition: 3m HORIZONTAL

Job No : 0217RG

Mode : 5240 Band edge

: Ant 1 5G WIFI 11A CH48

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	5240.000	8.46	34.45	38.45	91.87	96.33	-----	-----	Average
2	5350.020	8.63	34.43	38.43	37.25	41.88	54.00	-12.12	Average
3 pp	5353.519	8.63	34.43	38.43	37.26	41.89	54.00	-12.11	Average




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM180200138802

Page: 387 of 817

Test mode:	802.11a	Frequency(MHz):	5260	Peak	Vertical
------------	---------	-----------------	------	------	----------

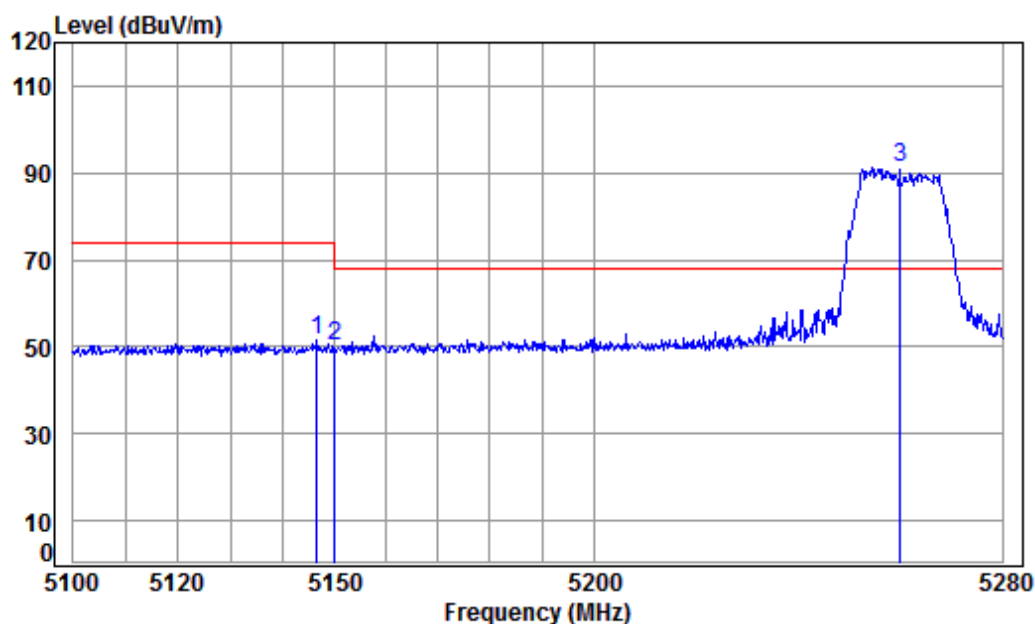

Condition: 3m VERTICAL

Job No : 0217RG

Mode : 5260 Band edge

: Ant 1 5G WIFI 11A CH52

	Freq	Cable Loss	Ant Factor	Preamplifier Factor	Read Level	Limit Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	5146.558	8.32	34.47	38.47	47.04	51.36	74.00	-22.64	Peak
2	5149.980	8.33	34.47	38.47	45.84	50.17	74.00	-23.83	Peak
3 pp	5260.000	8.49	34.45	38.44	86.84	91.34	68.20	23.14	Peak




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM180200138802

Page: 388 of 817

Test mode:	802.11a	Frequency(MHz):	5260	Average	Vertical
------------	---------	-----------------	------	---------	----------

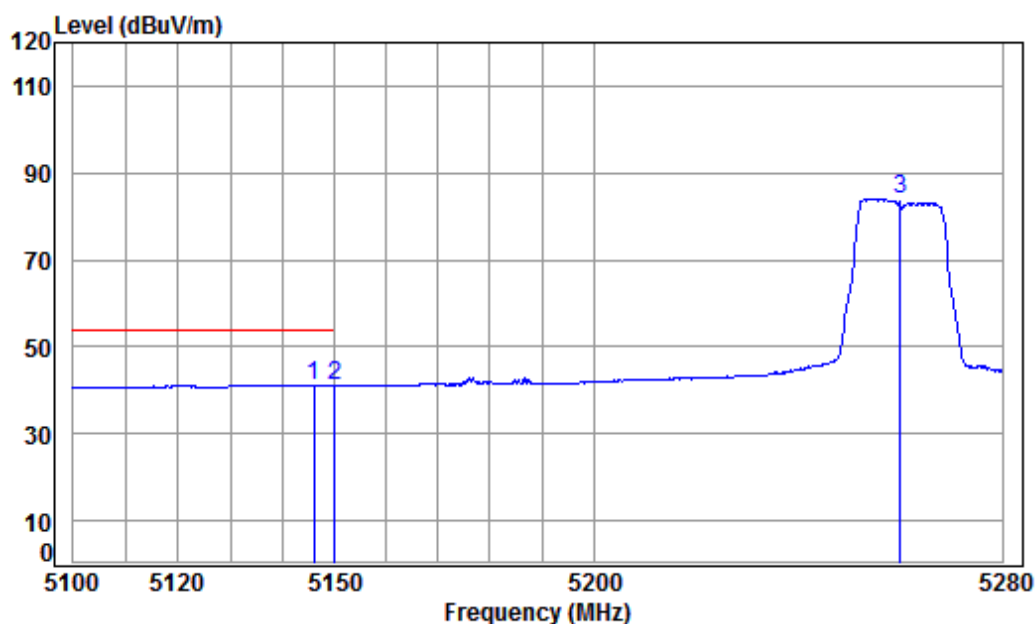

Condition: 3m VERTICAL

Job No : 0217RG

Mode : 5260 Band edge

: Ant 1 5G WIFI 11A CH52

		Cable	Ant	Preamp	Read	Limit	Over	
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1 pp	5146.022	8.32	34.47	38.47	36.88	41.20	54.00	-12.80 Average
2	5149.980	8.33	34.47	38.47	36.75	41.08	54.00	-12.92 Average
3	5260.000	8.49	34.45	38.44	79.60	84.10	-----	----- Average




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM180200138802

Page: 389 of 817

Test mode:	802.11a	Frequency(MHz):	5260	Peak	Horizontal
------------	---------	-----------------	------	------	------------

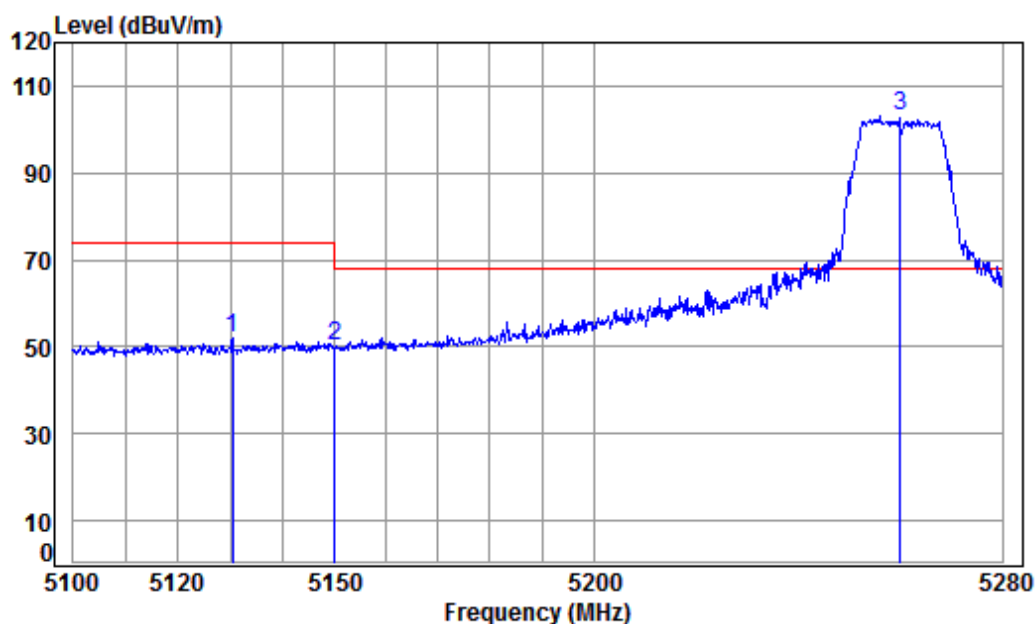

Condition: 3m HORIZONTAL

Job No : 0217RG

Mode : 5260 Band edge

: Ant 1 5G WIFI 11A CH52

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	5130.517	8.30	34.47	38.47	47.54	51.84	74.00	-22.16	peak
2	5149.980	8.33	34.47	38.47	46.02	50.35	74.00	-23.65	peak
3 pp	5260.000	8.49	34.45	38.44	98.46	102.96	68.20	34.76	peak




SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch

Report No.: SZEM180200138802

Page: 390 of 817

Test mode:	802.11a	Frequency(MHz):	5260	Average	Horizontal
------------	---------	-----------------	------	---------	------------

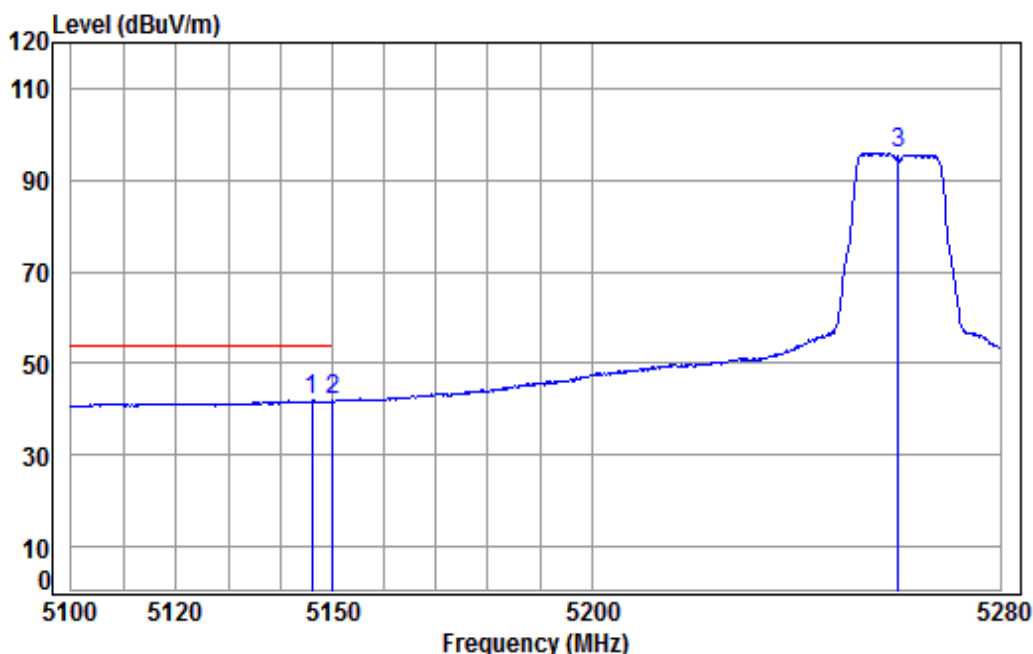

Condition: 3m HORIZONTAL

Job No : 0217RG

Mode : 5260 Band edge

: Ant 1 5G WIFI 11A CH52

		Cable	Ant	Preamp	Read		Limit	Over	
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	5146.022	8.32	34.47	38.47	37.52	41.84	54.00	-12.16	Average
2	pp 5149.980	8.33	34.47	38.47	37.56	41.89	54.00	-12.11	Average
3	5260.000	8.49	34.45	38.44	91.24	95.74	-----	-----	Average




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM180200138802

Page: 391 of 817

Test mode:	802.11a	Frequency(MHz):	5320	Peak	Vertical
------------	---------	-----------------	------	------	----------

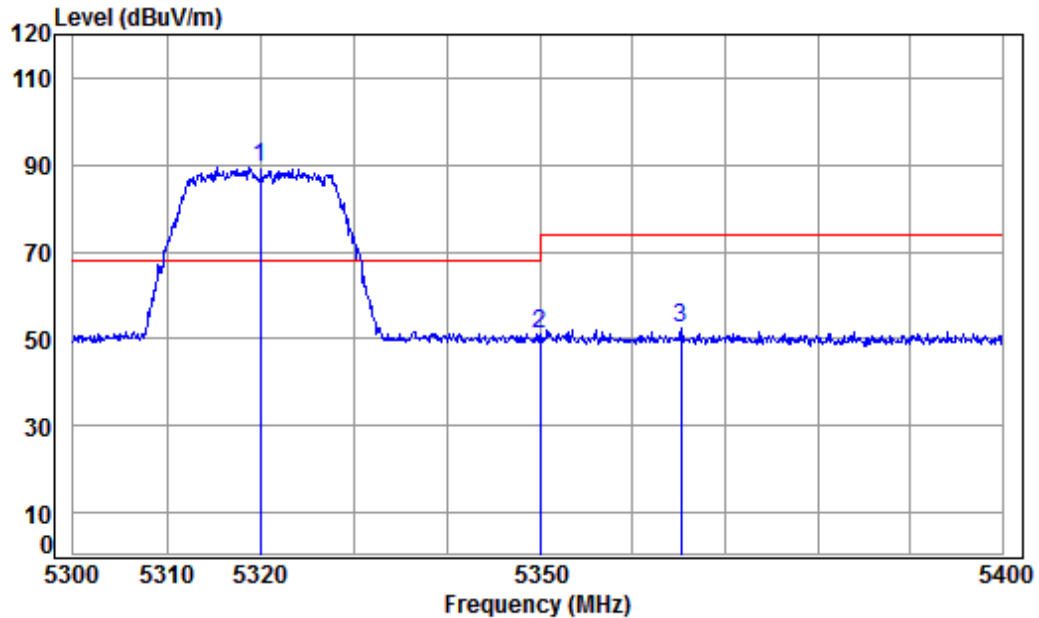

Condition: 3m VERTICAL

Job No : 0217RG

Mode : 5320 Band edge

: Ant 1 5G WIFI 11A CH64

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Limit Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1 pp	5320.000	8.58	34.43	38.43	84.97	89.55	68.20	21.35	Peak
2	5350.020	8.63	34.43	38.43	46.58	51.21	74.00	-22.79	Peak
3	5365.188	8.65	34.43	38.42	47.68	52.34	74.00	-21.66	Peak




SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch

Report No.: SZEM180200138802

Page: 392 of 817

Test mode:	802.11a	Frequency(MHz):	5320	Average	Vertical
------------	---------	-----------------	------	---------	----------

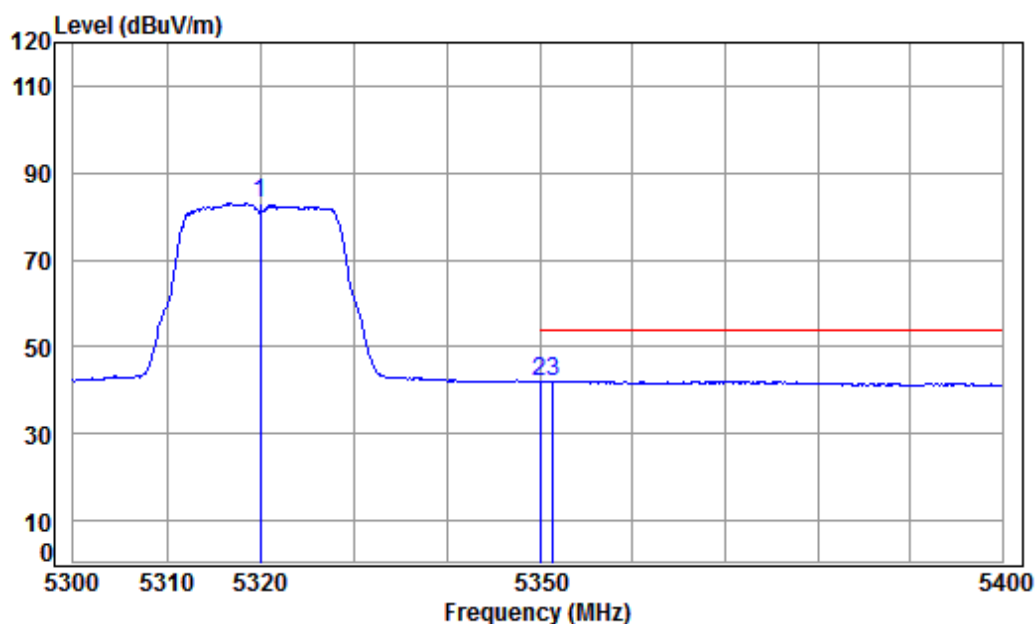

Condition: 3m VERTICAL

Job No : 0217RG

Mode : 5320 Band edge

: Ant 1 5G WIFI 11A CH64

	Freq	Cable Loss	Ant Factor	Preamplifier Factor	Read Level	Limit Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	5320.000	8.58	34.43	38.43	78.39	82.97	-----	-----	Average
2	5350.020	8.63	34.43	38.43	37.56	42.19	54.00	-11.81	Average
3 pp	5351.467	8.63	34.43	38.43	37.56	42.19	54.00	-11.81	Average




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM180200138802

Page: 393 of 817

Test mode:	802.11a	Frequency(MHz):	5320	Peak	Horizontal
------------	---------	-----------------	------	------	------------

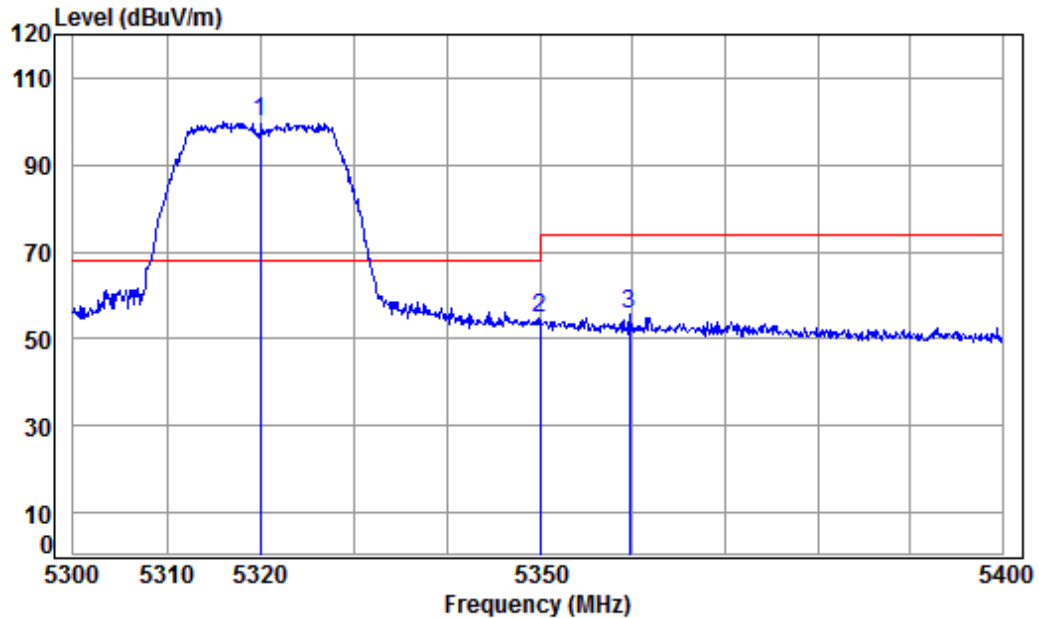

Condition: 3m HORIZONTAL

Job No : 0217RG

Mode : 5320 Band edge

: Ant 1 5G WIFI 11A CH64

		Cable	Ant	Preamp	Read	Limit	Over	
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1 pp	5320.000	8.58	34.43	38.43	95.45	100.03	68.20	31.83 peak
2	5350.020	8.63	34.43	38.43	50.31	54.94	74.00	-19.06 peak
3	5359.675	8.64	34.43	38.42	51.02	55.67	74.00	-18.33 peak




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM180200138802

Page: 394 of 817

Test mode:	802.11a	Frequency(MHz):	5320	Average	Horizontal
------------	---------	-----------------	------	---------	------------

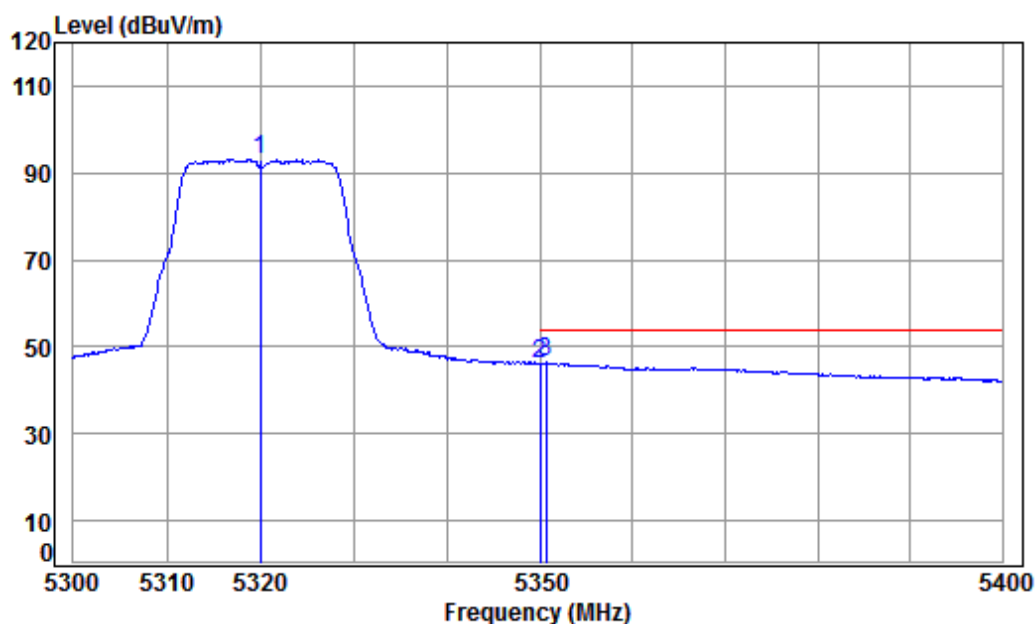

Condition: 3m HORIZONTAL

Job No : 0217RG

Mode : 5320 Band edge

: Ant 1 5G WIFI 11A CH64

	Freq	Cable Loss	Ant Factor	Preamplifier Factor	Read Level	Limit Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	5320.000	8.58	34.43	38.43	88.53	93.11	-----	-----	Average
2	5350.020	8.63	34.43	38.43	41.46	46.09	54.00	-7.91	Average
3 pp	5350.667	8.63	34.43	38.43	41.71	46.34	54.00	-7.66	Average




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM180200138802

Page: 395 of 817

Test mode:	802.11a	Frequency(MHz):	5500	Peak	Vertical
------------	---------	-----------------	------	------	----------

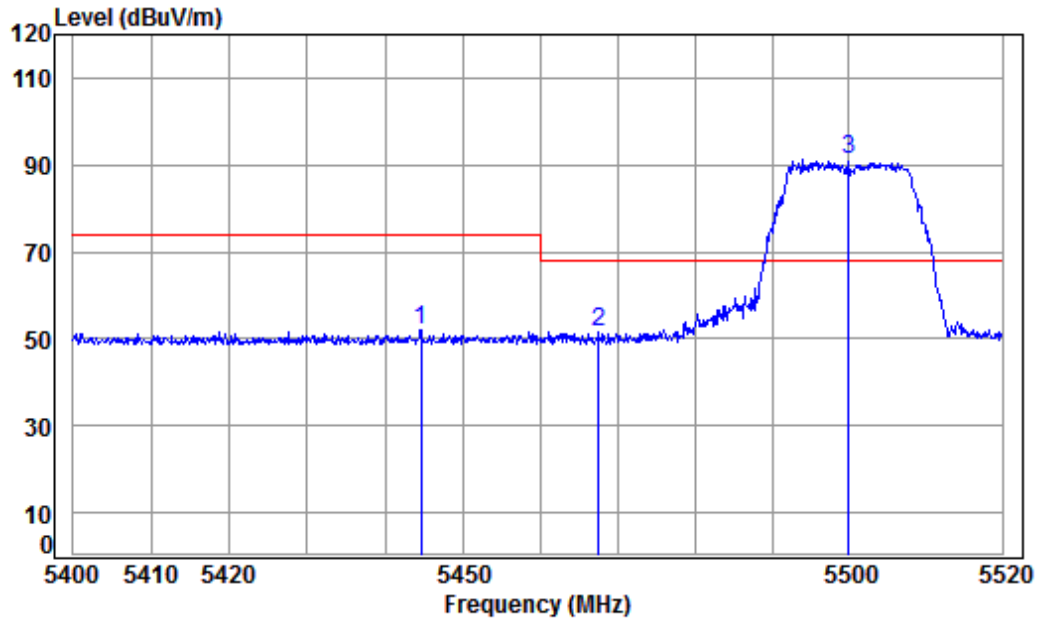

Condition: 3m VERTICAL

Job No : 0217RG

Mode : 5500 Band edge

: Ant 1 5G WIFI 11A CH100

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	5444.691	8.77	34.41	38.41	47.38	52.15	74.00	-21.85	Peak
2	5467.596	8.80	34.41	38.40	46.61	51.42	68.20	-16.78	peak
3 pp	5500.000	8.85	34.40	38.40	86.61	91.46	68.20	23.26	Peak




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM180200138802

Page: 396 of 817

Test mode:	802.11a	Frequency(MHz):	5500	Average	Vertical
------------	---------	-----------------	------	---------	----------

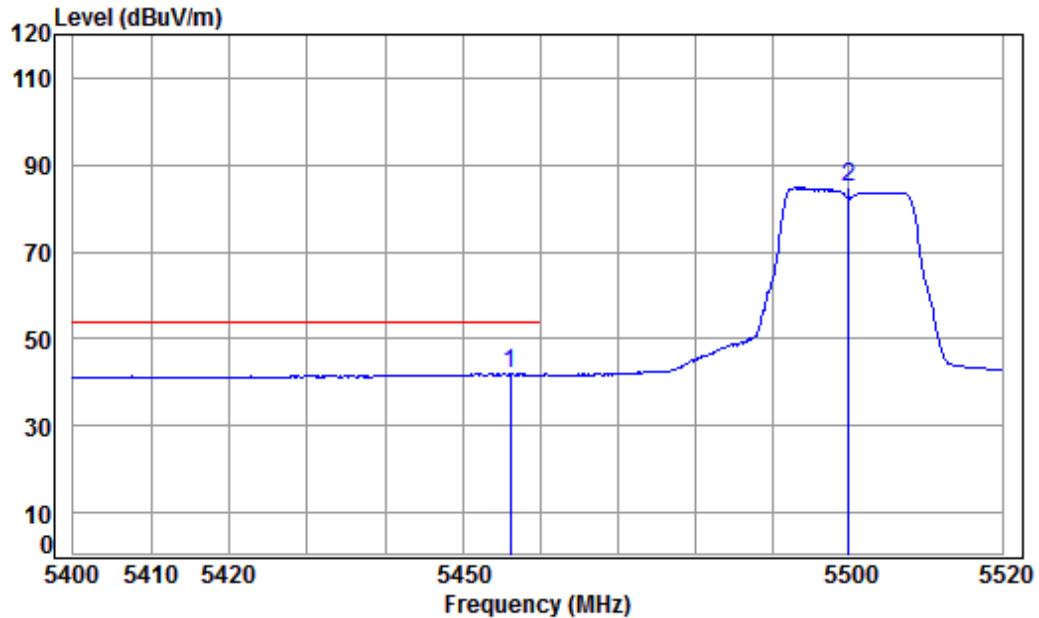

Condition: 3m VERTICAL

Job No : 0217RG

Mode : 5500 Band edge

: Ant 1 5G WIFI 11A CH100

		Cable	Ant	Preamp	Read	Limit	Over	
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1 pp	5456.191	8.79	34.41	38.40	37.13	41.93	54.00	-12.07 Average
2	5500.000	8.85	34.40	38.40	79.95	84.80	-----	----- Average




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM180200138802

Page: 397 of 817

Test mode:	802.11a	Frequency(MHz):	5500	Peak	Horizontal
------------	---------	-----------------	------	------	------------

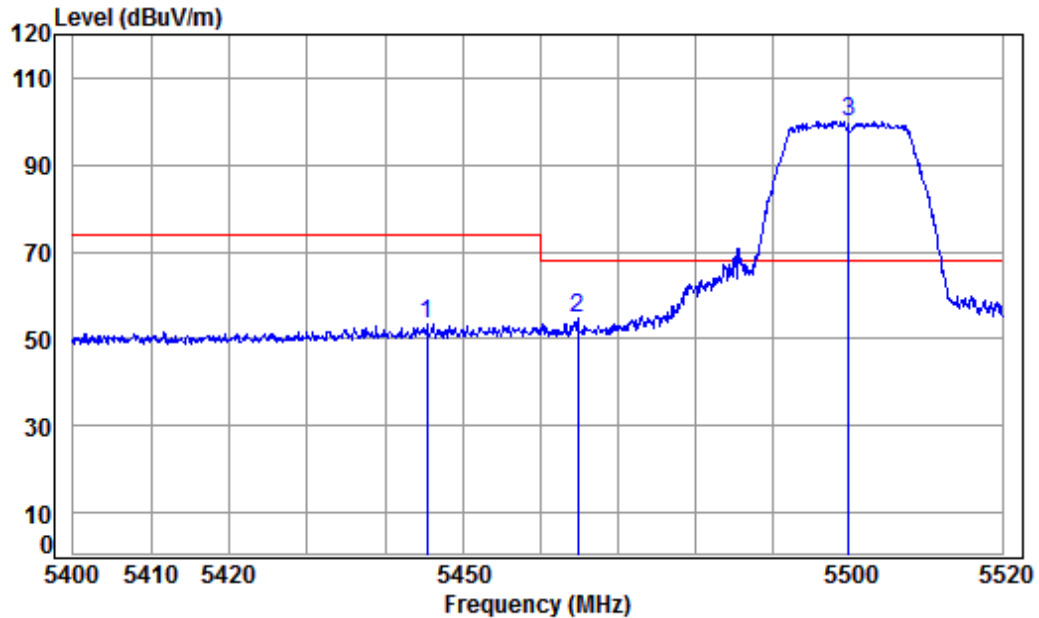

Condition: 3m HORIZONTAL

Job No : 0217RG

Mode : 5500 Band edge

: Ant 1 5G WIFI 11A CH100

	Freq	Cable Loss	Ant Factor	Preamplifier Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	5445.409	8.77	34.41	38.41	48.54	53.31	74.00	-20.69	peak
2	5464.833	8.80	34.41	38.40	49.76	54.57	68.20	-13.63	peak
3 pp	5500.000	8.85	34.40	38.40	95.14	99.99	68.20	31.79	peak




SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch

Report No.: SZEM180200138802

Page: 398 of 817

Test mode:	802.11a	Frequency(MHz):	5500	Average	Horizontal
------------	---------	-----------------	------	---------	------------

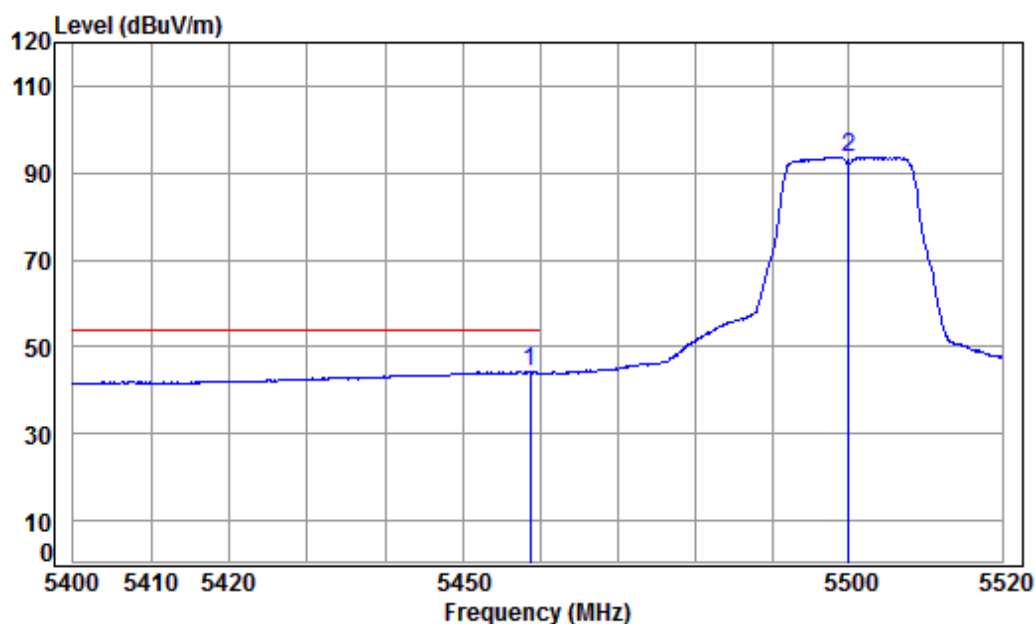

Condition: 3m HORIZONTAL

Job No : 0217RG

Mode : 5500 Band edge

: Ant 1 5G WIFI 11A CH100

		Cable	Ant	Preamp	Read	Limit	Over	
Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1 pp 5458.710	8.79	34.41	38.40	39.41	44.21	54.00	-9.79	Average
2 5500.000	8.85	34.40	38.40	88.73	93.58	-----	-----	Average




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM180200138802

Page: 399 of 817

Test mode:	802.11a	Frequency(MHz):	5700	Peak	Vertical
------------	---------	-----------------	------	------	----------

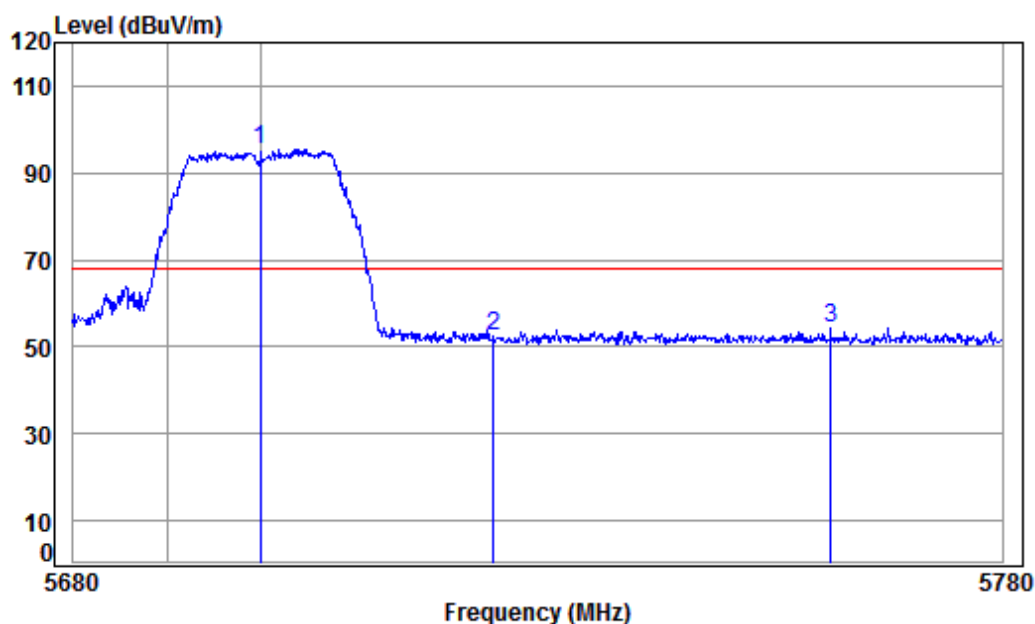

Condition: 3m VERTICAL

Job No : 0217RG

Mode : 5700 Band edge

: Ant 1 5G WIFI 11A CH140

		Cable	Ant	Preamp	Read	Limit	Over	
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1	pp 5700.000	9.56	34.52	38.13	89.43	95.38	68.20	27.18 Peak
2	5725.000	9.64	34.54	38.13	46.49	52.54	68.20	-15.66 Peak
3	5761.368	9.77	34.56	38.12	47.91	54.12	68.20	-14.08 Peak




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM180200138802

Page: 400 of 817

Test mode:	802.11a	Frequency(MHz):	5700	Peak	Horizontal
------------	---------	-----------------	------	------	------------

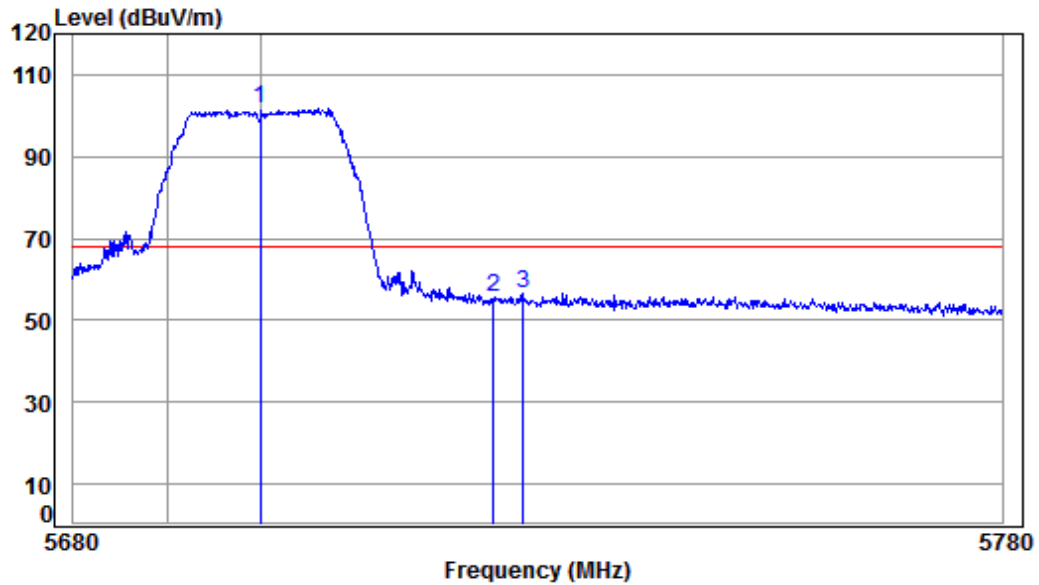

Condition: 3m HORIZONTAL

Job No : 0217RG

Mode : 5700 Band edge

: Ant 1 5G WIFI 11A CH140

		Cable	Ant	Preamp	Read	Limit	Over	
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1	pp 5700.000	9.56	34.52	38.13	95.75	101.70	68.20	33.50 peak
2	5725.000	9.64	34.54	38.13	49.42	55.47	68.20	-12.73 peak
3	5728.182	9.65	34.54	38.13	50.65	56.71	68.20	-11.49 peak




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM180200138802

Page: 401 of 817

Test mode:	802.11a	Frequency(MHz):	5745	Peak	Vertical
------------	---------	-----------------	------	------	----------

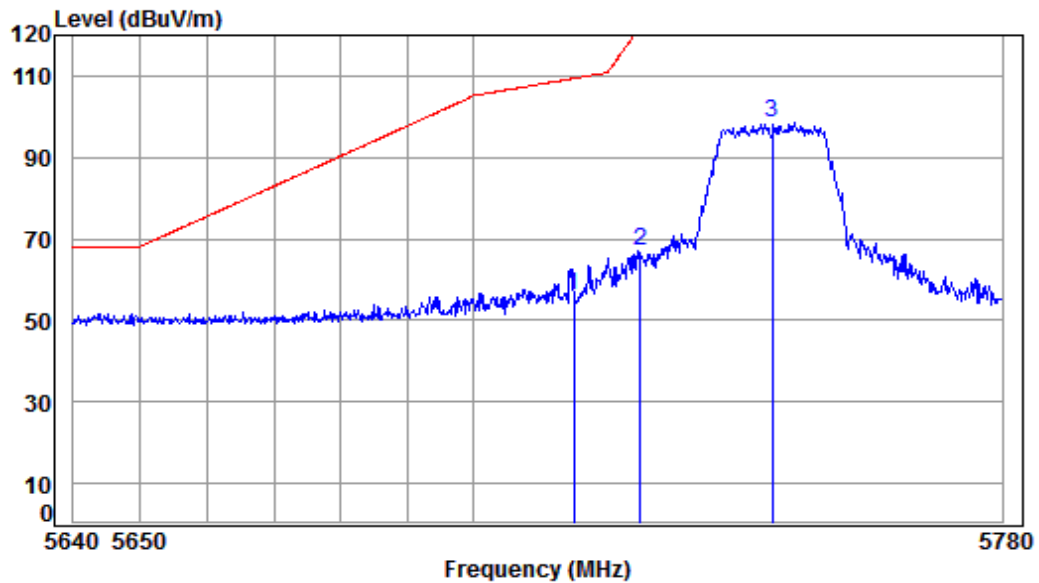

Condition: 3m VERTICAL

Job No : 0217RG

Mode : 5745 Band edge

: Ant 1 5G WIFI 11A CH149

		Cable	Ant	Preamp	Read		Limit	Over	
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	5715.000	9.61	34.53	38.13	49.89	55.90	109.40	-53.50	peak
2	5725.000	9.64	34.54	38.13	60.91	66.96	122.20	-55.24	peak
3 pp	5745.000	9.71	34.55	38.12	92.22	98.36	125.20	-26.84	peak




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM180200138802

Page: 402 of 817

Test mode:	802.11a	Frequency(MHz):	5745	Peak	Horizontal
------------	---------	-----------------	------	------	------------

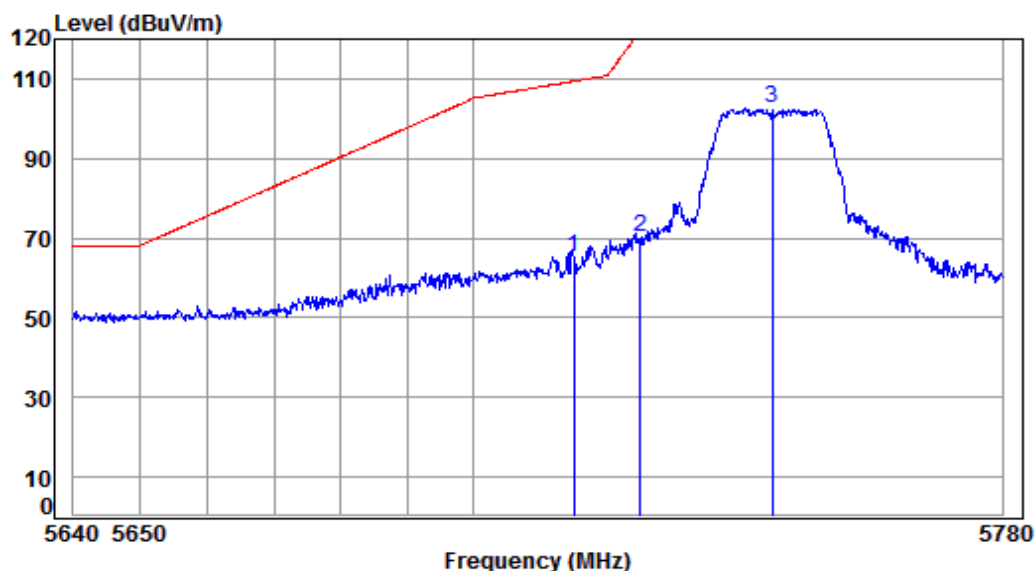

Condition: 3m HORIZONTAL

Job No : 0217RG

Mode : 5745 Band edge

: Ant 1 5G WIFI 11A CH149

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	5715.000	9.61	34.53	38.13	59.33	65.34	109.40	-44.06	peak
2	5725.000	9.64	34.54	38.13	64.16	70.21	122.20	-51.99	peak
3 pp	5745.000	9.71	34.55	38.12	96.63	102.77	125.20	-22.43	peak




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM180200138802

Page: 403 of 817

Test mode:	802.11a	Frequency(MHz):	5825	Peak	Vertical
------------	---------	-----------------	------	------	----------

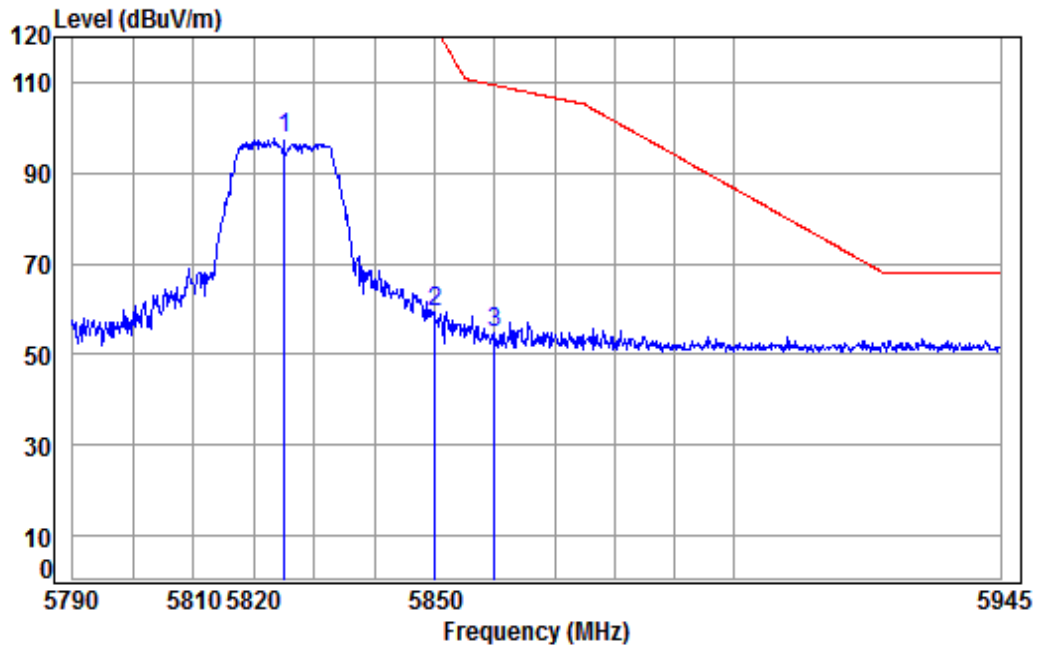

Condition: 3m VERTICAL

Job No : 0217RG

Mode : 5825 Band edge

: Ant 1 5G WIFI 11A CH165

		Cable	Ant	Preamp	Read		Limit	Over	
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	pp 5825.000	9.98	34.60	38.12	91.17	97.63	125.20	-27.57	peak
2	5850.000	10.07	34.61	38.11	52.57	59.14	122.20	-63.06	peak
3	5860.000	10.10	34.62	38.11	48.07	54.68	109.40	-54.72	peak




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM180200138802

Page: 404 of 817

Test mode:	802.11a	Frequency(MHz):	5825	Peak	Horizontal
------------	---------	-----------------	------	------	------------

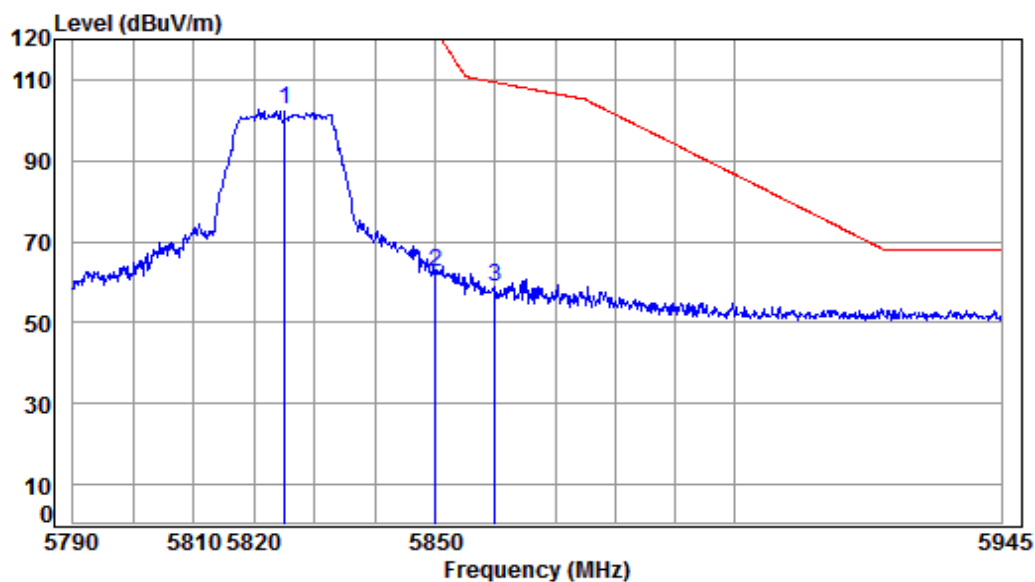

Condition: 3m HORIZONTAL

Job No : 0217RG

Mode : 5825 Band edge

: Ant 1 5G WIFI 11A CH165

		Cable	Ant	Preamp	Read	Limit	Over	
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1	pp 5825.000	9.98	34.60	38.12	96.18	102.64	125.20	-22.56 peak
2	5850.000	10.07	34.61	38.11	56.11	62.68	122.20	-59.52 peak
3	5860.000	10.10	34.62	38.11	52.06	58.67	109.40	-50.73 peak




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM180200138802

Page: 405 of 817

Test mode:	802.11n(HT20)	Frequency(MHz):	5180	Peak	Vertical
------------	---------------	-----------------	------	------	----------

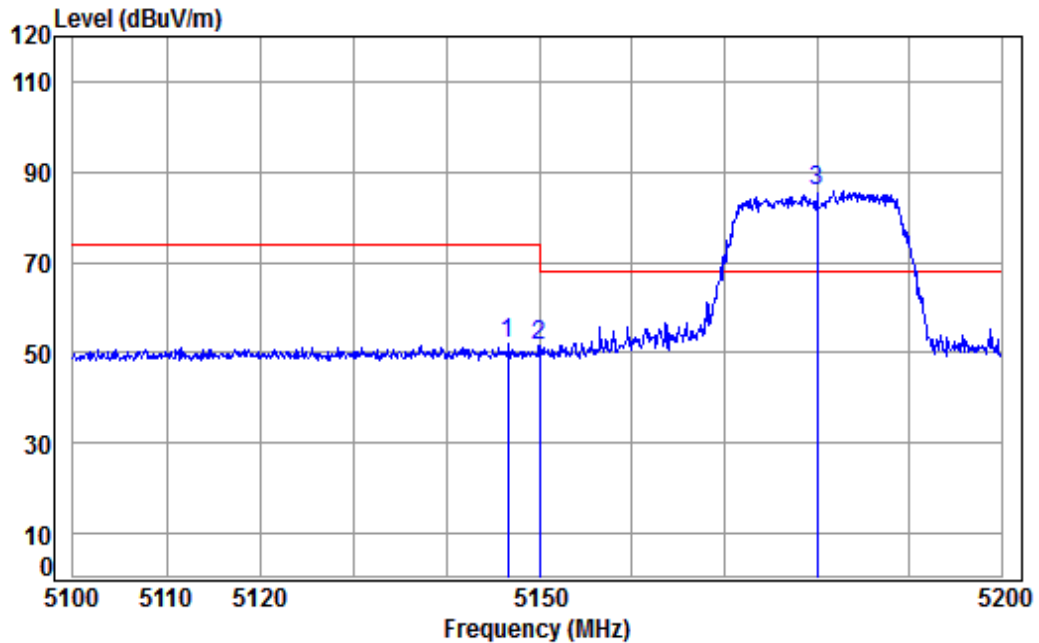

Condition: 3m VERTICAL

Job No : 0217RG

Mode : 5180 Band edge

: Ant 1 5G WIFI 11N CH36

		Cable	Ant	Preamp	Read		Limit	Over	
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	5146.658	8.32	34.47	38.18	47.55	52.16	74.00	-21.84	Peak
2	5149.980	8.33	34.47	38.18	46.85	51.47	74.00	-22.53	Peak
3 pp	5180.000	8.37	34.46	38.18	81.30	85.95	68.20	17.75	Peak




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM180200138802

Page: 406 of 817

Test mode:	802.11n(HT20)	Frequency(MHz):	5180	Average	Vertical
------------	---------------	-----------------	------	---------	----------

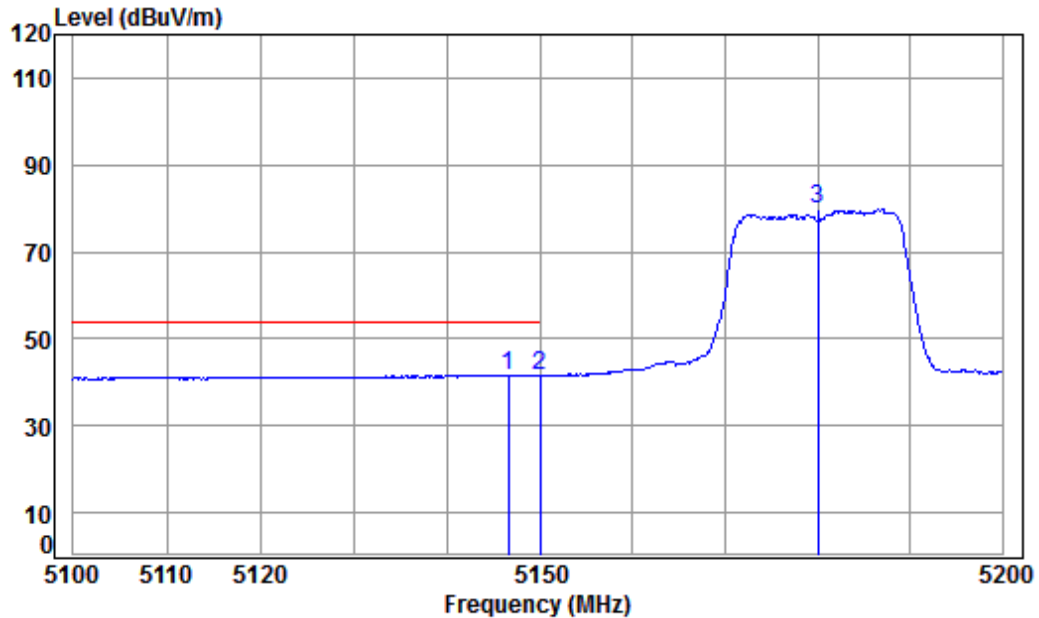

Condition: 3m VERTICAL

Job No : 0217RG

Mode : 5180 Band edge

: Ant 1 5G WIFI 11N CH36

		Cable	Ant	Preamp	Read	Limit	Over	
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1 pp	5146.558	8.32	34.47	38.18	37.02	41.63	54.00	-12.37 Average
2	5149.980	8.33	34.47	38.18	36.85	41.47	54.00	-12.53 Average
3	5180.000	8.37	34.46	38.18	75.16	79.81	-----	----- Average




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM180200138802

Page: 407 of 817

Test mode:	802.11n(HT20)	Frequency(MHz):	5180	Peak	Horizontal
------------	---------------	-----------------	------	------	------------

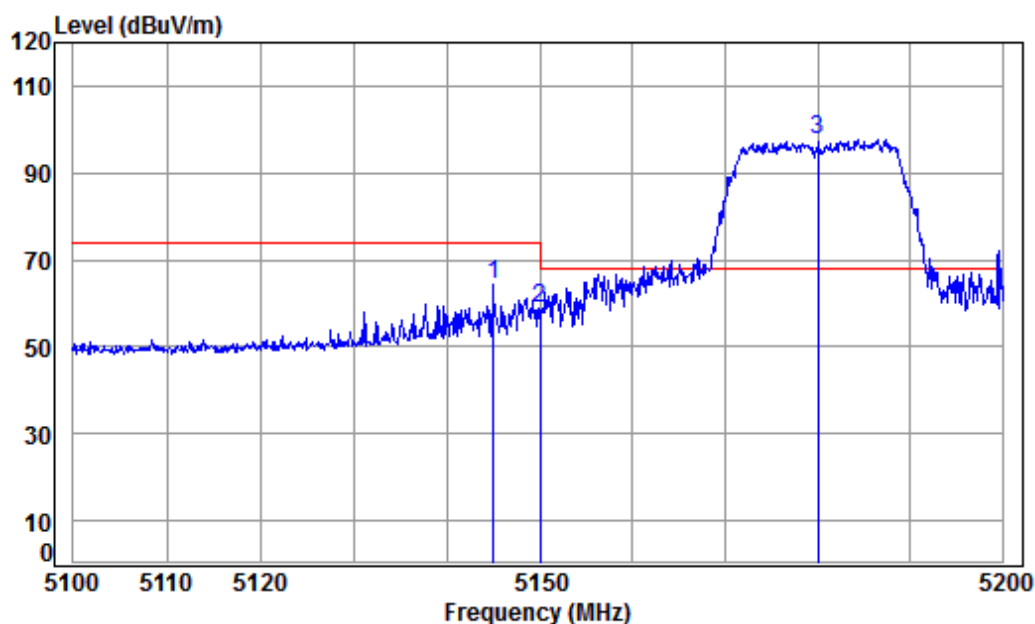

Condition: 3m HORIZONTAL

Job No : 0217RG

Mode : 5180 Band edge

: Ant 1 5G WIFI 11N CH36

	Freq	Cable Loss	Ant Factor	Preamplifier Factor	Read Level	Limit Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	5144.959	8.32	34.47	38.18	59.93	64.54	74.00	-9.46	peak
2	5149.980	8.33	34.47	38.18	54.25	58.87	74.00	-15.13	peak
3 pp	5180.000	8.37	34.46	38.18	93.07	97.72	68.20	29.52	peak




SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch

Report No.: SZEM180200138802

Page: 408 of 817

Test mode:	802.11n(HT20)	Frequency(MHz):	5180	Average	Horizontal
------------	---------------	-----------------	------	---------	------------

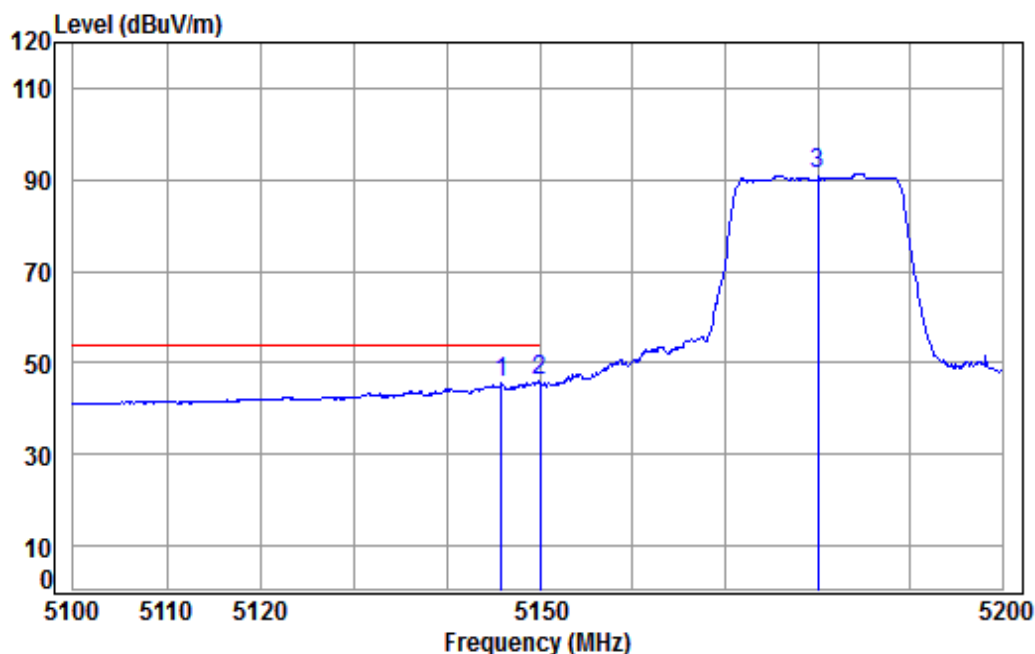

Condition: 3m HORIZONTAL

Job No : 0217RG

Mode : 5180 Band edge

: Ant 1 5G WIFI 11N CH36

		Cable	Ant	Preamp	Read		Limit	Over	
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	5145.859	8.32	34.47	38.18	41.04	45.65	54.00	-8.35	Average
2	pp 5149.980	8.33	34.47	38.18	41.38	46.00	54.00	-8.00	Average
3	5180.000	8.37	34.46	38.18	86.59	91.24	-----	-----	Average




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM180200138802

Page: 409 of 817

Test mode:	802.11n(HT20)	Frequency(MHz):	5240	Peak	Vertical
------------	---------------	-----------------	------	------	----------

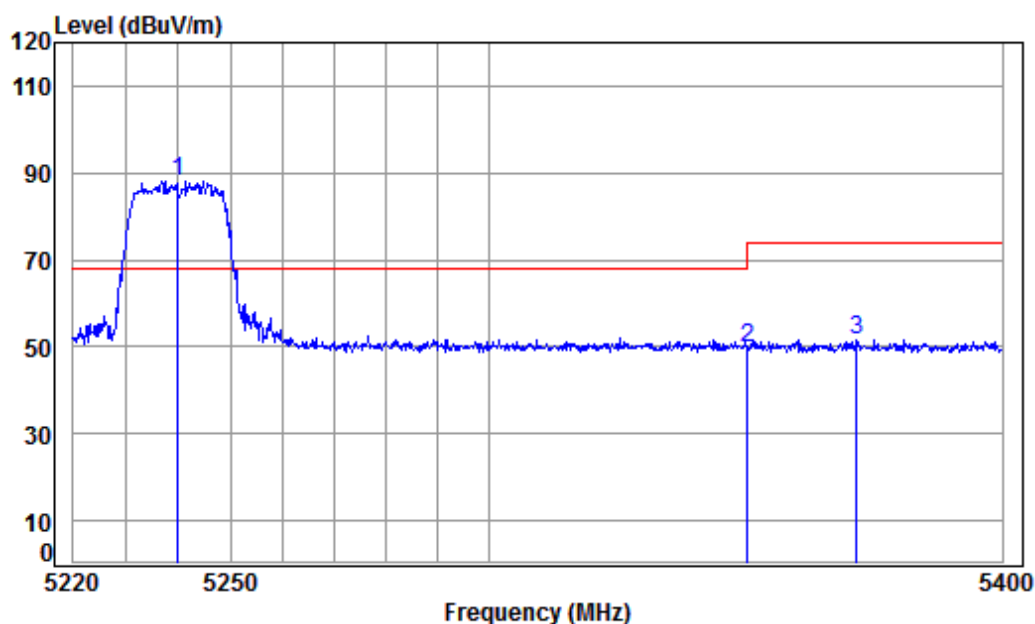

Condition: 3m VERTICAL

Job No : 0217RG

Mode : 5240 Band edge

: Ant 1 5G WIFI 11N CH48

		Cable	Ant	Preamp	Read	Limit	Over	
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1 pp	5240.000	8.46	34.45	38.17	83.26	88.00	68.20	19.80 Peak
2	5350.020	8.63	34.43	38.16	45.05	49.95	74.00	-24.05 Peak
3	5371.334	8.66	34.42	38.16	46.83	51.75	74.00	-22.25 Peak




SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch

Report No.: SZEM180200138802

Page: 410 of 817

Test mode:	802.11n(HT20)	Frequency(MHz):	5240	Average	Vertical
------------	---------------	-----------------	------	---------	----------

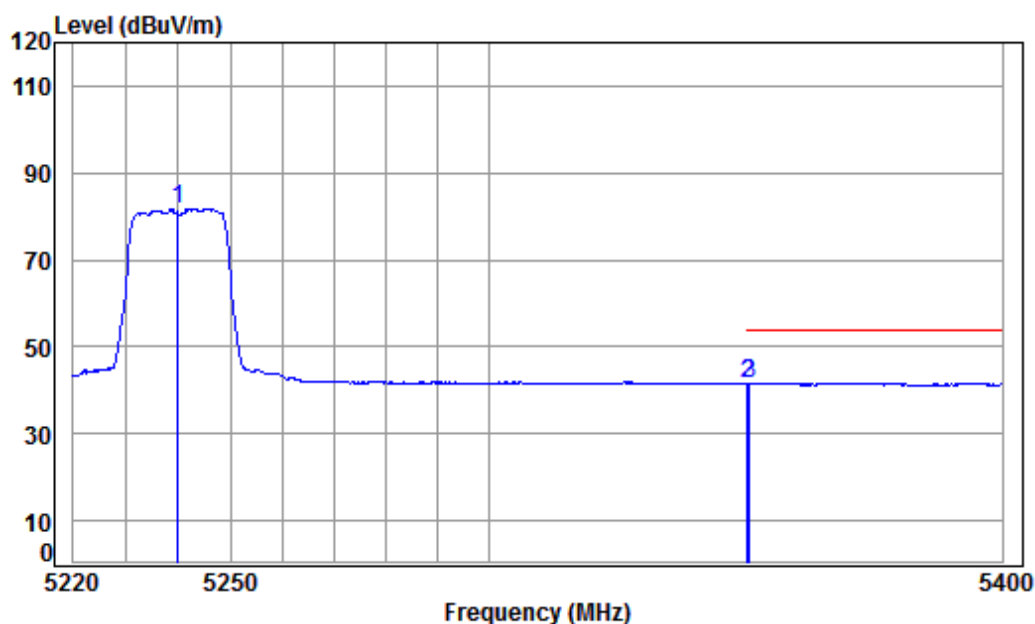

Condition: 3m VERTICAL

Job No : 0217RG

Mode : 5240 Band edge

: Ant 1 5G WIFI 11N CH48

	Freq	Cable Loss	Ant Factor	Preamplifier Factor	Read Level	Limit Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	5240.000	8.46	34.45	38.17	76.98	81.72	-----	-----	Average
2	5350.020	8.63	34.43	38.16	36.81	41.71	54.00	-12.29	Average
3 pp	5350.434	8.63	34.43	38.16	36.84	41.74	54.00	-12.26	Average




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM180200138802

Page: 411 of 817

Test mode:	802.11n(HT20)	Frequency(MHz):	5240	Peak	Horizontal
------------	---------------	-----------------	------	------	------------

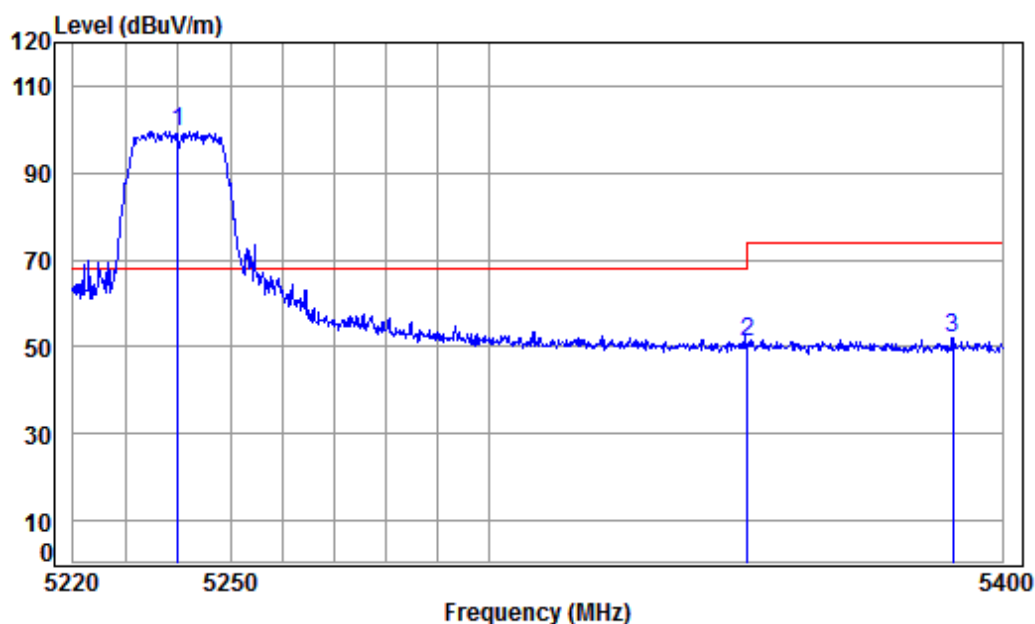

Condition: 3m HORIZONTAL

Job No : 0217RG

Mode : 5240 Band edge

: Ant 1 5G WIFI 11N CH48

		Cable	Ant	Preamp	Read	Limit	Over	
	Freq	Loss	Factor	Factor	Level	Line	Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1	pp 5240.000	8.46	34.45	38.17	94.86	99.60	68.20	31.40 peak
2	5350.020	8.63	34.43	38.16	46.09	50.99	74.00	-23.01 peak
3	5390.306	8.69	34.42	38.16	46.86	51.81	74.00	-22.19 peak




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM180200138802

Page: 412 of 817

Test mode:	802.11n(HT20)	Frequency(MHz):	5240	Average	Horizontal
------------	---------------	-----------------	------	---------	------------

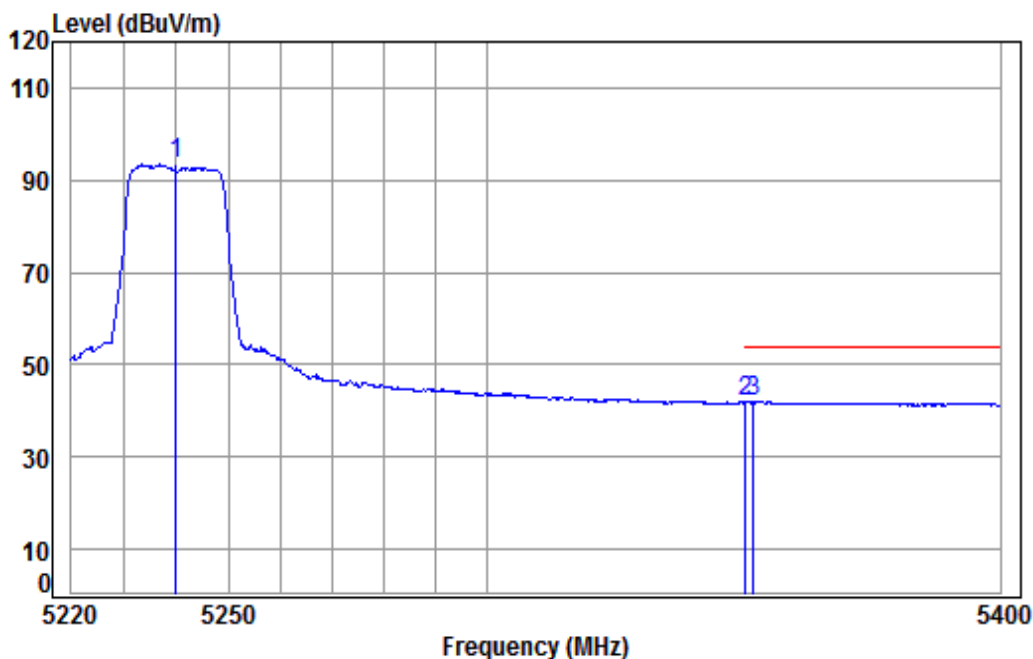

Condition: 3m HORIZONTAL

Job No : 0217RG

Mode : 5240 Band edge

: Ant 1 5G WIFI 11N CH48

		Cable	Ant	Preamp	Read		Limit	Over	
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	5240.000	8.46	34.45	38.17	88.58	93.32	-----	-----	Average
2	pp 5350.020	8.63	34.43	38.16	37.00	41.90	54.00	-12.10	Average
3	5351.523	8.63	34.43	38.16	36.97	41.87	54.00	-12.13	Average




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM180200138802

Page: 413 of 817

Test mode:	802.11n(HT20)	Frequency(MHz):	5260	Peak	Vertical
------------	---------------	-----------------	------	------	----------

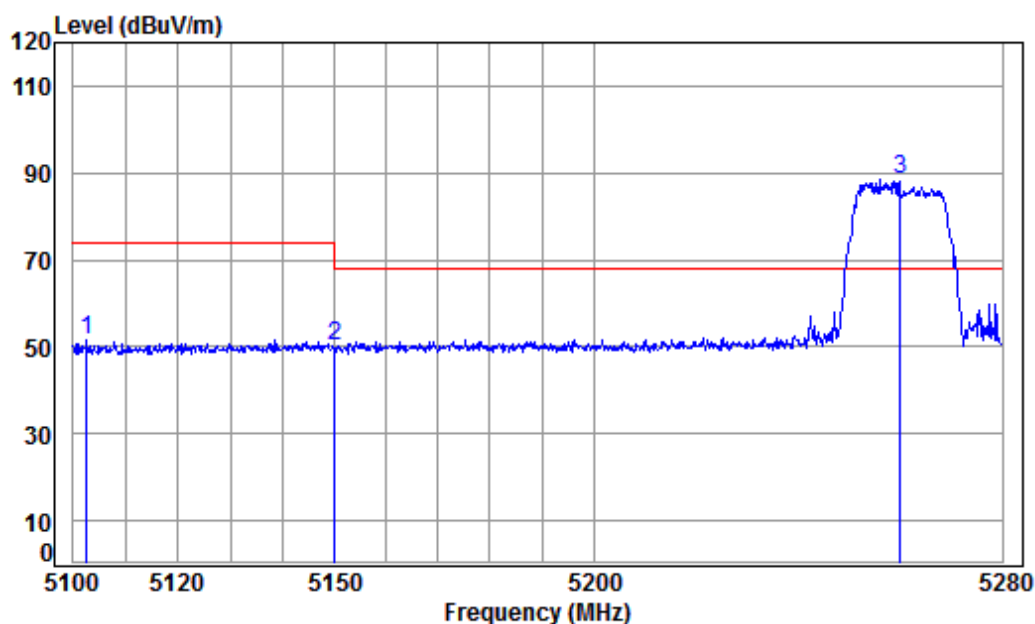

Condition: 3m VERTICAL

Job No : 0217RG

Mode : 5260 Band edge

: Ant 1 5G WIFI 11N CH52

	Freq	Cable Loss	Ant Factor	Preamplifier Factor	Read Level	Limit Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	5102.654	8.25	34.48	38.19	47.10	51.64	74.00	-22.36	Peak
2	5149.980	8.33	34.47	38.18	45.60	50.22	74.00	-23.78	Peak
3 pp	5260.000	8.49	34.45	38.17	83.84	88.61	68.20	20.41	Peak




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM180200138802

Page: 414 of 817

Test mode:	802.11n(HT20)	Frequency(MHz):	5260	Average	Vertical
------------	---------------	-----------------	------	---------	----------

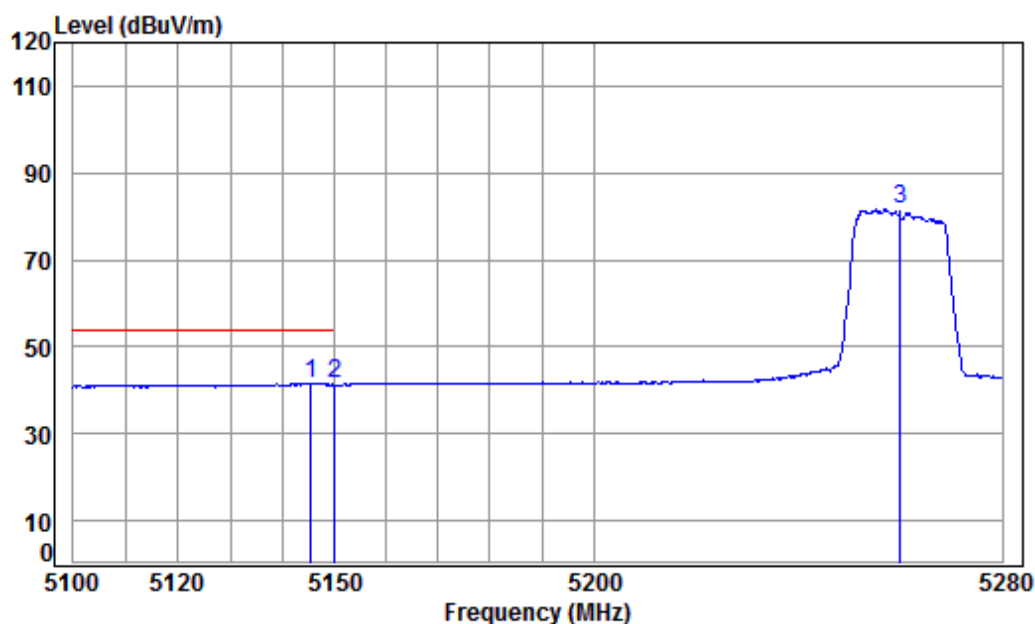

Condition: 3m VERTICAL

Job No : 0217RG

Mode : 5260 Band edge

: Ant 1 5G WIFI 11N CH52

		Cable	Ant	Preamp	Read	Limit	Over	
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1 pp	5145.487	8.32	34.47	38.18	36.86	41.47	54.00	-12.53 Average
2	5149.980	8.33	34.47	38.18	36.68	41.30	54.00	-12.70 Average
3	5260.000	8.49	34.45	38.17	76.71	81.48	-----	----- Average




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM180200138802

Page: 415 of 817

Test mode:	802.11n(HT20)	Frequency(MHz):	5260	Peak	Horizontal
------------	---------------	-----------------	------	------	------------

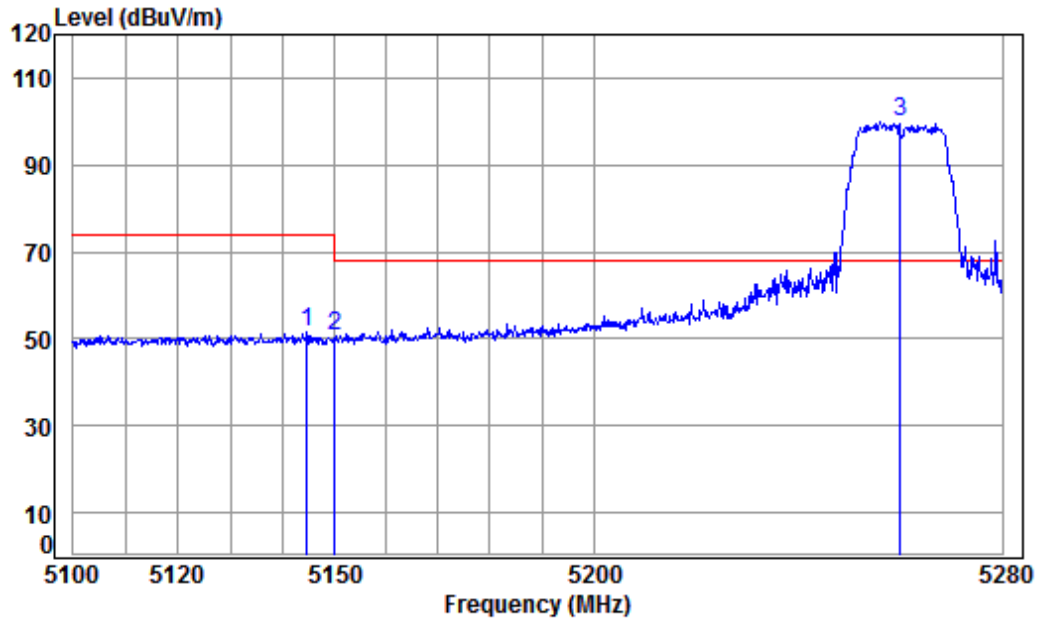

Condition: 3m HORIZONTAL

Job No : 0217RG

Mode : 5260 Band edge

: Ant 1 5G WIFI 11N CH52

	Freq	Cable Loss	Ant Factor	Preamplifier Factor	Read Level	Limit Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	5144.773	8.32	34.47	38.18	46.83	51.44	74.00	-22.56	peak
2	5149.980	8.33	34.47	38.18	46.06	50.68	74.00	-23.32	peak
3 pp	5260.000	8.49	34.45	38.17	95.03	99.80	68.20	31.60	peak




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM180200138802

Page: 416 of 817

Test mode:	802.11n(HT20)	Frequency(MHz):	5260	Average	Horizontal
------------	---------------	-----------------	------	---------	------------

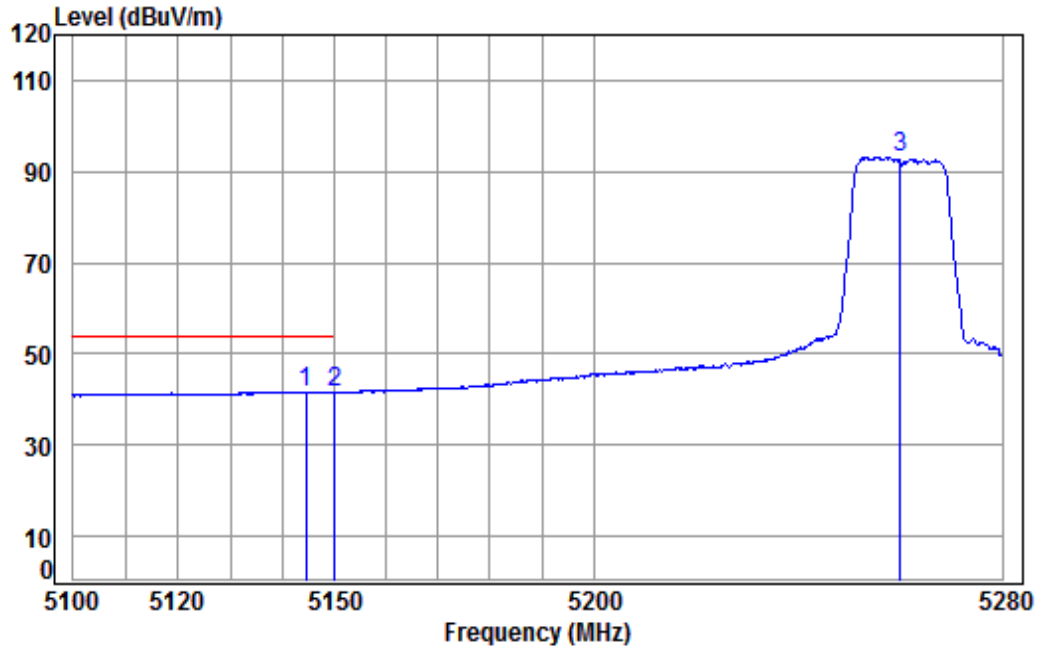

Condition: 3m HORIZONTAL

Job No : 0217RG

Mode : 5260 Band edge

: Ant 1 5G WIFI 11N CH52

		Cable	Ant	Preamp	Read		Limit	Over	
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1 pp	5144.595	8.32	34.47	38.18	37.03	41.64	54.00	-12.36	Average
2	5149.980	8.33	34.47	38.18	36.95	41.57	54.00	-12.43	Average
3	5260.000	8.49	34.45	38.17	88.25	93.02	-----	-----	Average




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM180200138802

Page: 417 of 817

Test mode:	802.11n(HT20)	Frequency(MHz):	5320	Peak	Vertical
------------	---------------	-----------------	------	------	----------

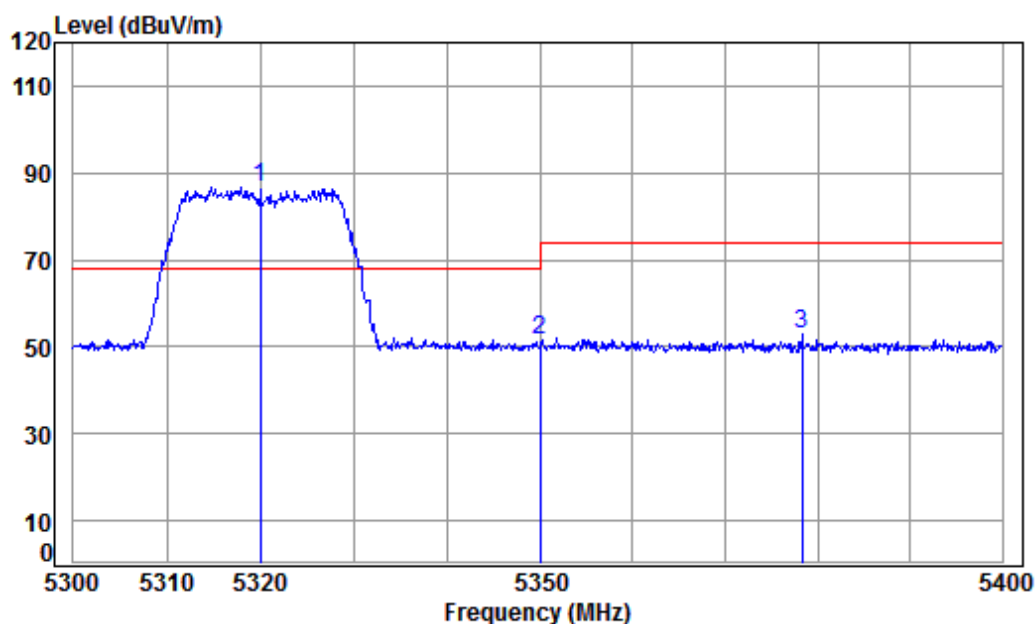

Condition: 3m VERTICAL

Job No : 0217RG

Mode : 5320 Band edge

: Ant 1 5G WIFI 11N CH64

		Cable	Ant	Preamp	Read	Limit	Over	
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1 pp	5320.000	8.58	34.43	38.17	82.05	86.89	68.20	18.69 Peak
2	5350.020	8.63	34.43	38.16	46.51	51.41	74.00	-22.59 Peak
3	5378.342	8.67	34.42	38.16	47.85	52.78	74.00	-21.22 Peak




SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch

Report No.: SZEM180200138802

Page: 418 of 817

Test mode:	802.11n(HT20)	Frequency(MHz):	5320	Average	Vertical
------------	---------------	-----------------	------	---------	----------

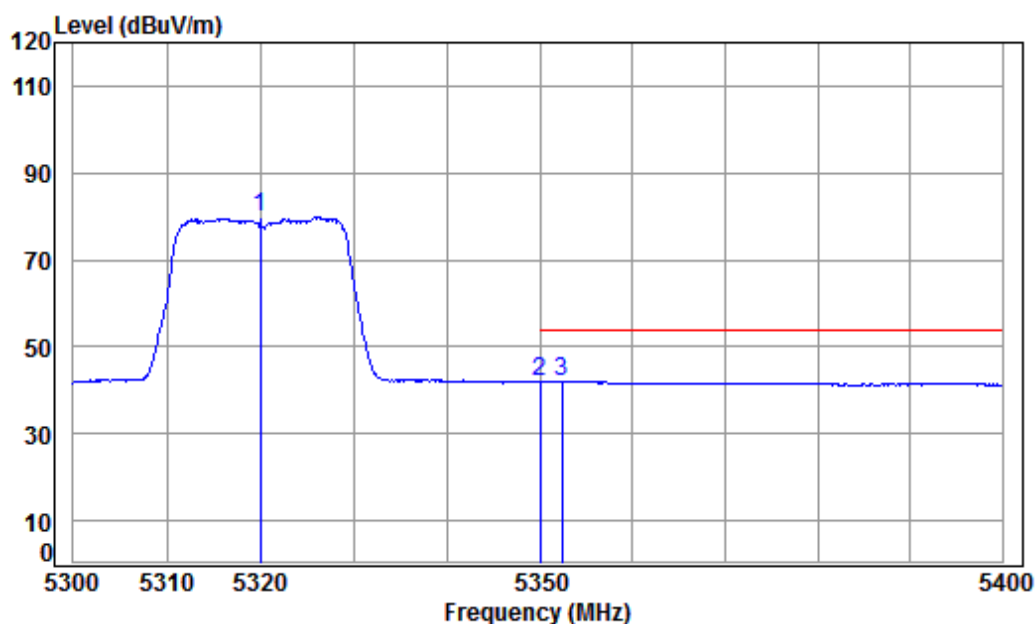

Condition: 3m VERTICAL

Job No : 0217RG

Mode : 5320 Band edge

: Ant 1 5G WIFI 11N CH64

	Freq	Cable Loss	Ant Factor	Preamplifier Factor	Read Level	Limit Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	5320.000	8.58	34.43	38.17	75.15	79.99	-----	-----	Average
2 pp	5350.020	8.63	34.43	38.16	37.18	42.08	54.00	-11.92	Average
3	5352.367	8.63	34.43	38.16	37.16	42.06	54.00	-11.94	Average




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM180200138802

Page: 419 of 817

Test mode:	802.11n(HT20)	Frequency(MHz):	5320	Peak	Horizontal
------------	---------------	-----------------	------	------	------------

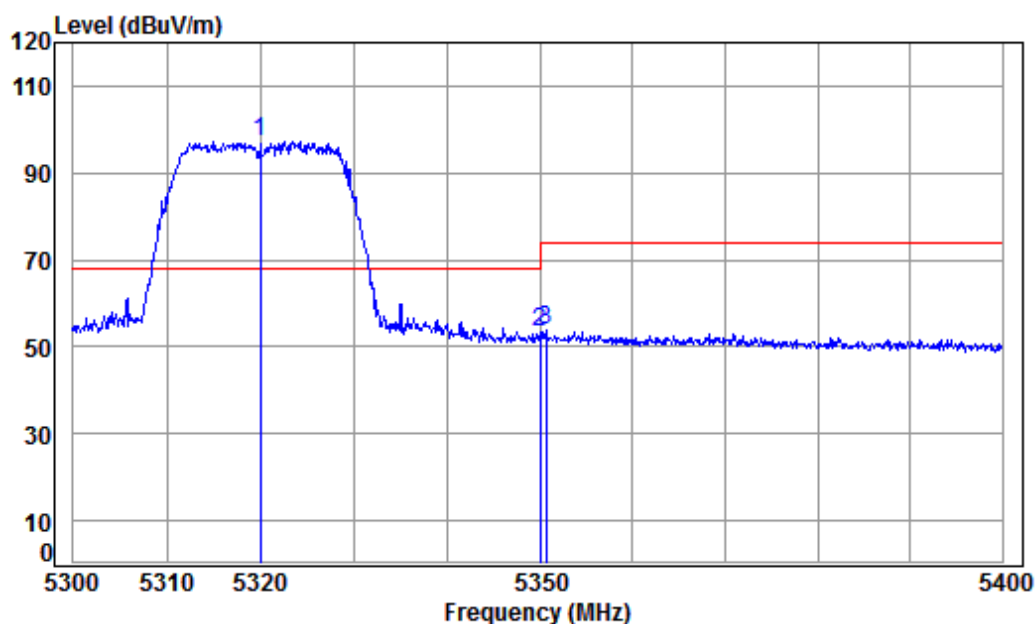

Condition: 3m HORIZONTAL

Job No : 0217RG

Mode : 5320 Band edge

: Ant 1 5G WIFI 11N CH64

		Cable	Ant	Preamp	Read	Limit	Over	
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1	pp 5320.000	8.58	34.43	38.17	92.45	97.29	68.20	29.09 peak
2	5350.020	8.63	34.43	38.16	48.66	53.56	74.00	-20.44 peak
3	5350.667	8.63	34.43	38.16	48.91	53.81	74.00	-20.19 peak




SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch

Report No.: SZEM180200138802

Page: 420 of 817

Test mode:	802.11n(HT20)	Frequency(MHz):	5320	Average	Horizontal
------------	---------------	-----------------	------	---------	------------

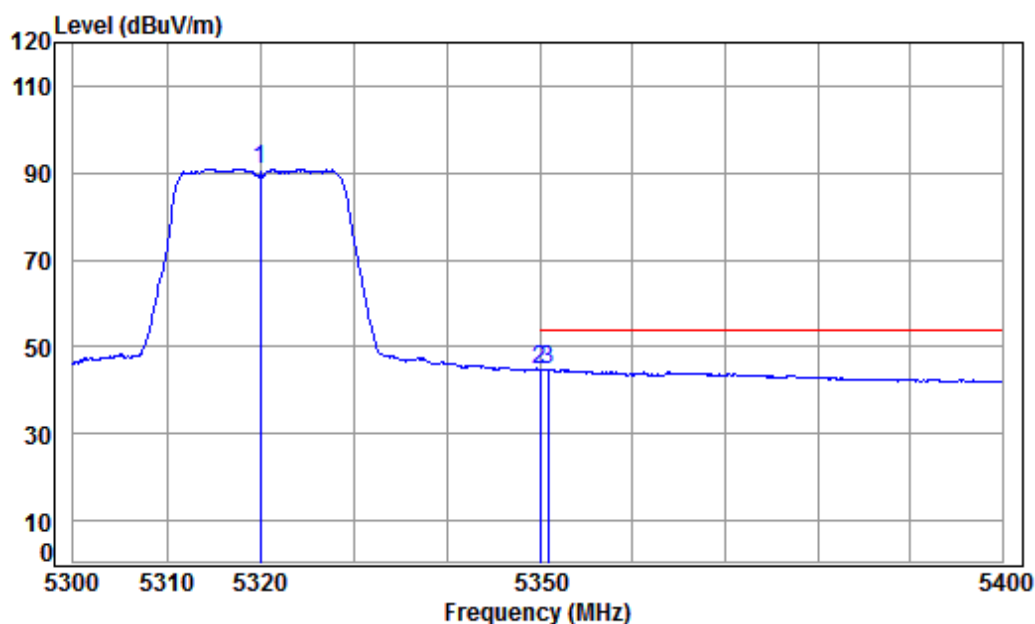

Condition: 3m HORIZONTAL

Job No : 0217RG

Mode : 5320 Band edge

: Ant 1 5G WIFI 11N CH64

	Freq	Cable Loss	Ant Factor	Preamplifier Factor	Read Level	Limit Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	5320.000	8.58	34.43	38.17	86.18	91.02	-----	-----	Average
2	5350.020	8.63	34.43	38.16	39.91	44.81	54.00	-9.19	Average
3 pp	5350.866	8.63	34.43	38.16	39.92	44.82	54.00	-9.18	Average




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM180200138802

Page: 421 of 817

Test mode:	802.11n(HT20)	Frequency(MHz):	5500	Peak	Vertical
------------	---------------	-----------------	------	------	----------

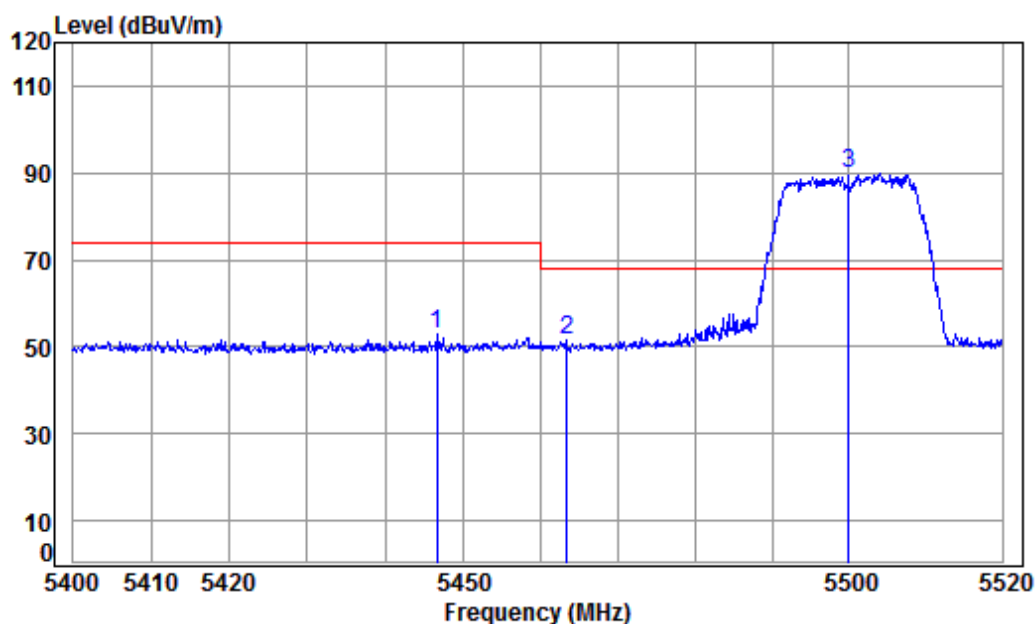

Condition: 3m VERTICAL

Job No : 0217RG

Mode : 5500 Band edge

: Ant 1 5G WIFI 11N CH100

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	5446.726	8.77	34.41	38.15	47.77	52.80	74.00	-21.20	Peak
2	5463.392	8.80	34.41	38.15	46.34	51.40	68.20	-16.80	peak
3 pp	5500.000	8.85	34.40	38.15	84.64	89.74	68.20	21.54	Peak




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM180200138802

Page: 422 of 817

Test mode:	802.11n(HT20)	Frequency(MHz):	5500	Average	Vertical
------------	---------------	-----------------	------	---------	----------

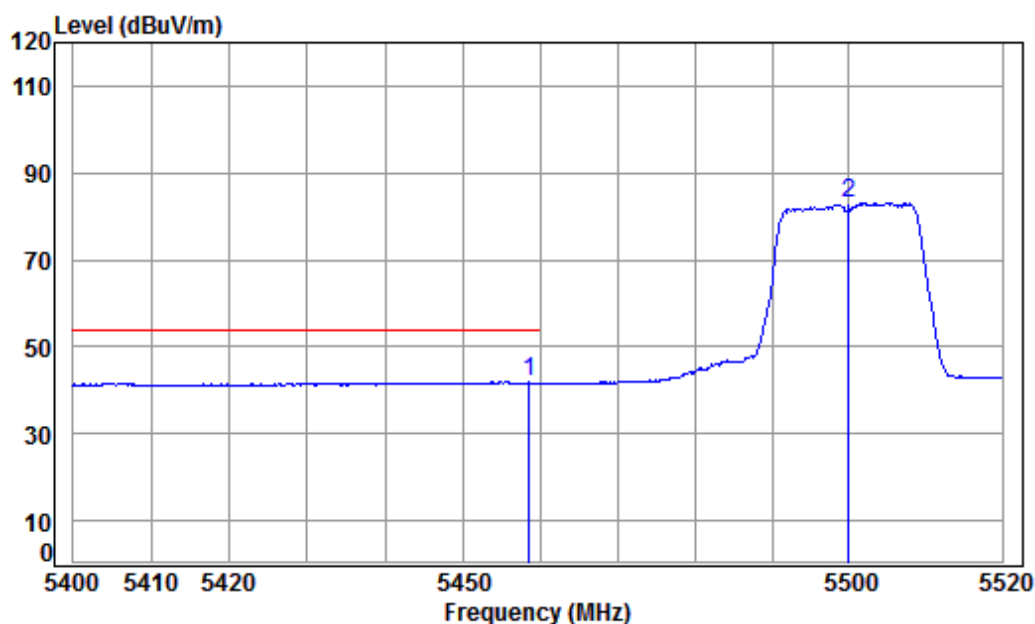

Condition: 3m VERTICAL

Job No : 0217RG

Mode : 5500 Band edge

: Ant 1 5G WIFI 11N CH100

		Cable	Ant	Preamp	Read	Limit	Over	
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1	pp 5458.590	8.79	34.41	38.15	36.81	41.86	54.00	-12.14 Average
2	5500.000	8.85	34.40	38.15	77.94	83.04	-----	----- Average




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM180200138802

Page: 423 of 817

Test mode:	802.11n(HT20)	Frequency(MHz):	5500	Peak	Horizontal
------------	---------------	-----------------	------	------	------------

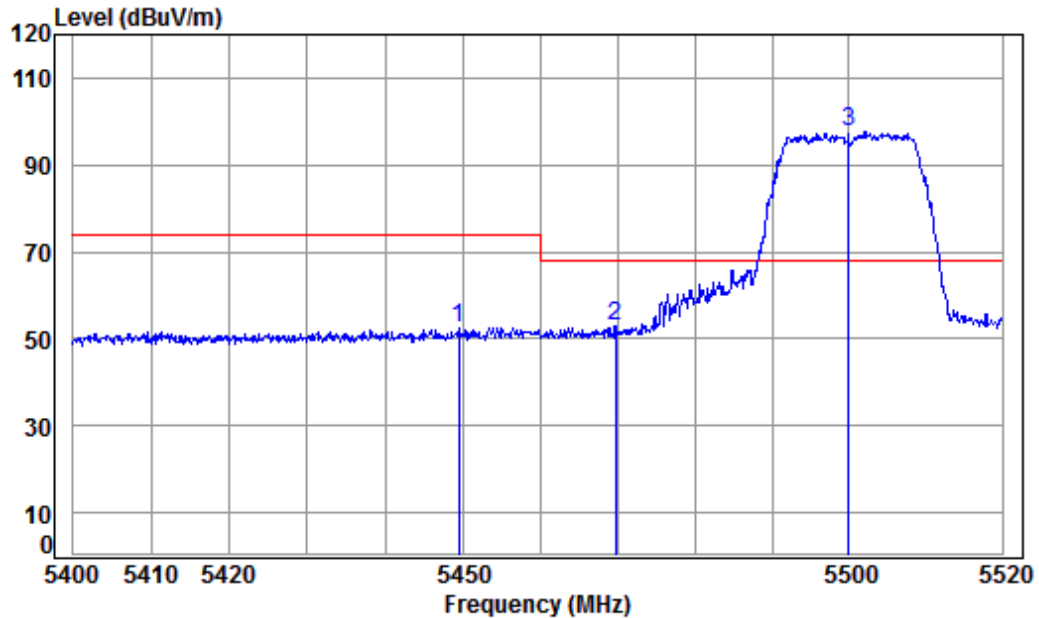

Condition: 3m HORIZONTAL

Job No : 0217RG

Mode : 5500 Band edge

: Ant 1 5G WIFI 11N CH100

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	5449.480	8.78	34.41	38.15	47.57	52.61	74.00	-21.39	peak
2	5469.759	8.81	34.41	38.15	47.81	52.88	68.20	-15.32	peak
3 pp	5500.000	8.85	34.40	38.15	92.54	97.64	68.20	29.44	peak




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM180200138802

Page: 424 of 817

Test mode:	802.11n(HT20)	Frequency(MHz):	5500	Average	Horizontal
------------	---------------	-----------------	------	---------	------------

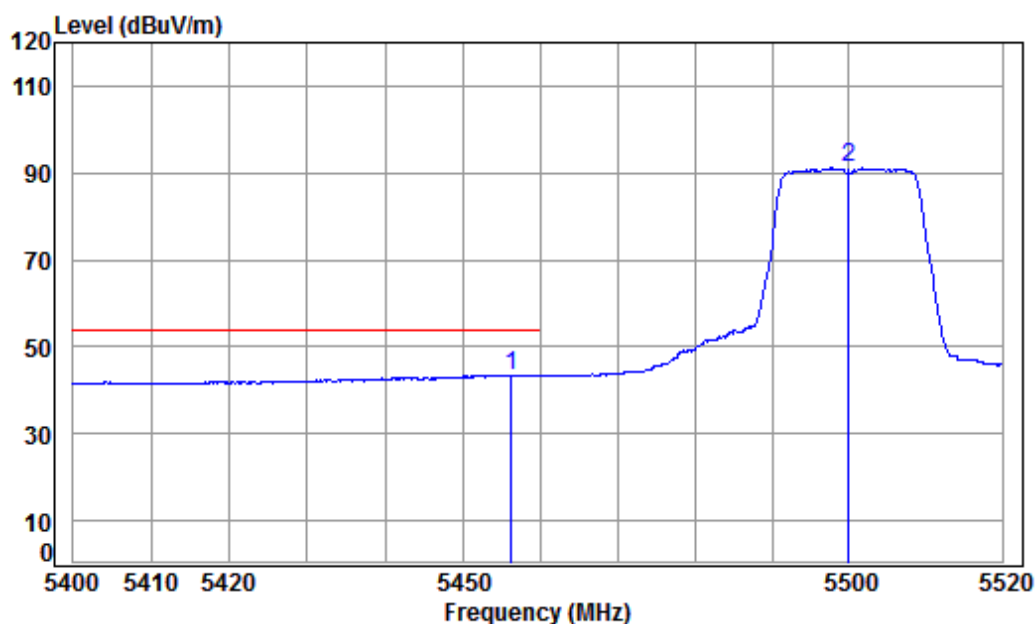

Condition: 3m HORIZONTAL

Job No : 0217RG

Mode : 5500 Band edge

: Ant 1 5G WIFI 11N CH100

		Cable	Ant	Preamp	Read	Limit	Over	
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1 pp	5456.312	8.79	34.41	38.15	38.41	43.46	54.00	-10.54 Average
2	5500.000	8.85	34.40	38.15	85.99	91.09	-----	----- Average




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM180200138802

Page: 425 of 817

Test mode:	802.11n(HT20)	Frequency(MHz):	5700	Peak	Vertical
------------	---------------	-----------------	------	------	----------

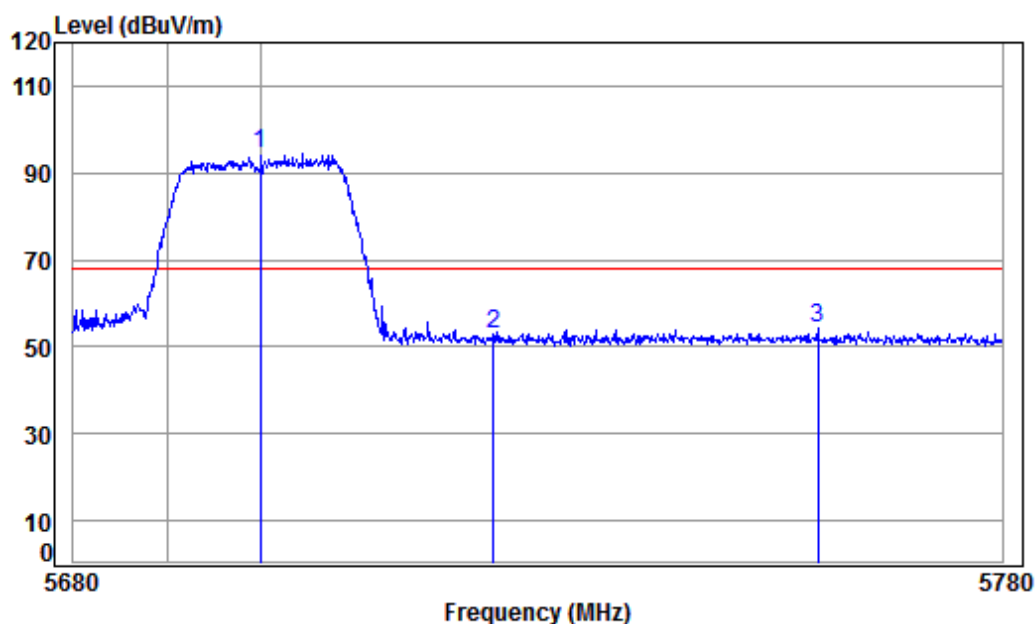

Condition: 3m VERTICAL

Job No : 0217RG

Mode : 5700 Band edge

: Ant 1 5G WIFI 11N CH140

		Cable	Ant	Preamp	Read	Limit	Over	
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1	pp 5700.000	9.56	34.52	38.13	88.29	94.24	68.20	26.04 Peak
2	5725.000	9.64	34.54	38.13	46.70	52.75	68.20	-15.45 Peak
3	5760.061	9.76	34.56	38.12	48.11	54.31	68.20	-13.89 Peak




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM180200138802

Page: 426 of 817

Test mode:	802.11n(HT20)	Frequency(MHz):	5700	Peak	Horizontal
------------	---------------	-----------------	------	------	------------

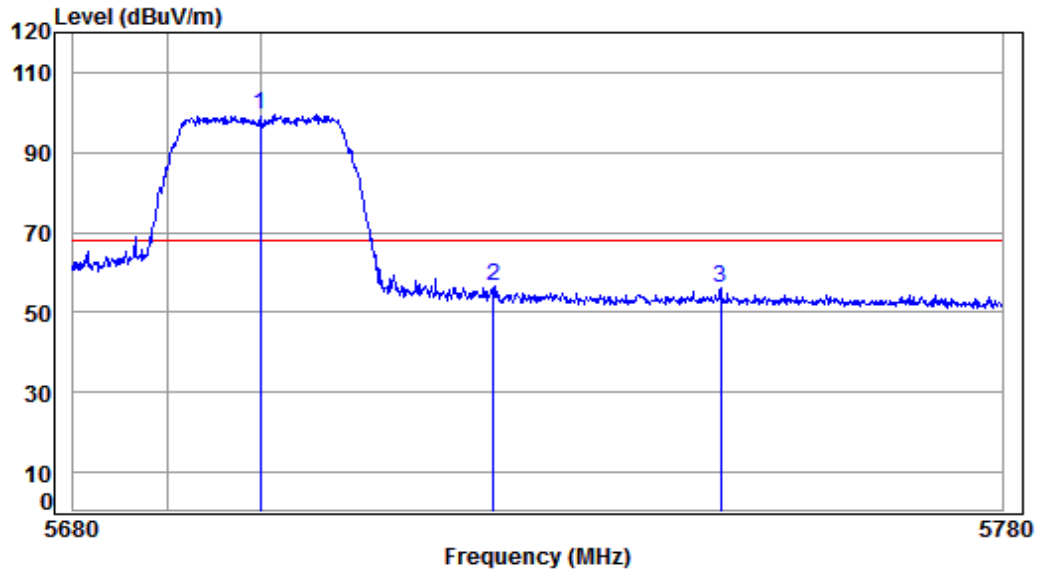

Condition: 3m HORIZONTAL

Job No : 0217RG

Mode : 5700 Band edge

: Ant 1 5G WIFI 11N CH140

		Cable	Ant	Preamp	Read		Limit	Over	
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1 pp	5700.000	9.56	34.52	38.13	93.63	99.58	68.20	31.38	peak
2	5725.000	9.64	34.54	38.13	50.62	56.67	68.20	-11.53	peak
3	5749.516	9.73	34.55	38.12	49.81	55.97	68.20	-12.23	peak




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM180200138802

Page: 427 of 817

Test mode:	802.11n(HT20)	Frequency(MHz):	5745	Peak	Vertical
------------	---------------	-----------------	------	------	----------

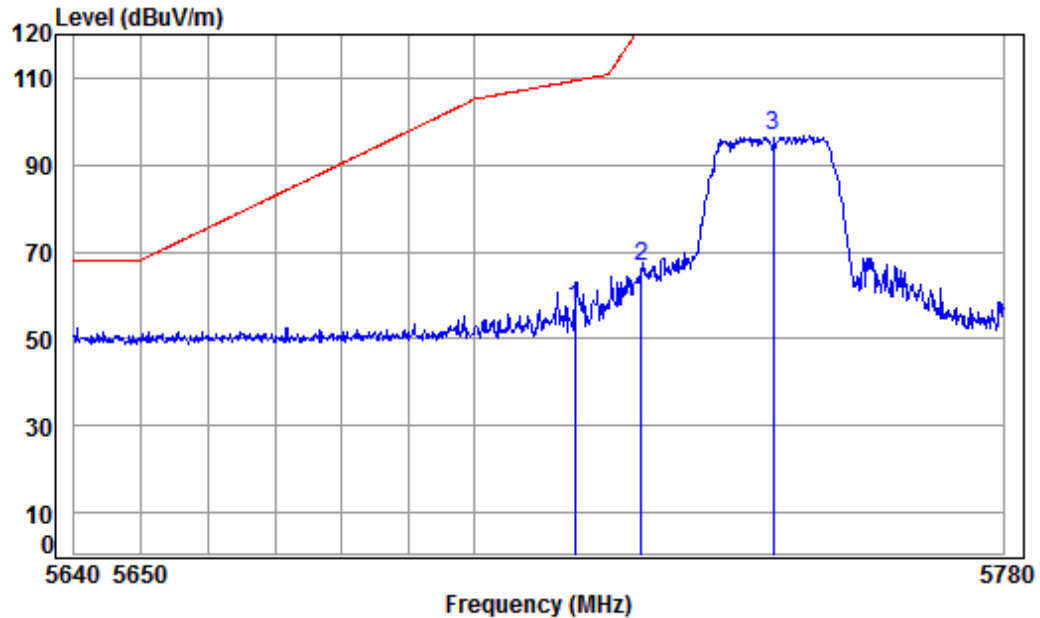

Condition: 3m VERTICAL

Job No : 0217RG

Mode : 5745 Band edge

: Ant 1 5G WIFI 11N CH149

	Freq	Cable Loss	Ant Factor	Preamplifier Factor	Read Level	Limit Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	5715.000	9.61	34.53	38.13	51.01	57.02	109.40	-52.38	peak
2	5725.000	9.64	34.54	38.13	60.79	66.84	122.20	-55.36	peak
3 pp	5745.000	9.71	34.55	38.12	90.50	96.64	125.20	-28.56	peak




SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch

Report No.: SZEM180200138802

Page: 428 of 817

Test mode:	802.11n(HT20)	Frequency(MHz):	5745	Peak	Horizontal
------------	---------------	-----------------	------	------	------------

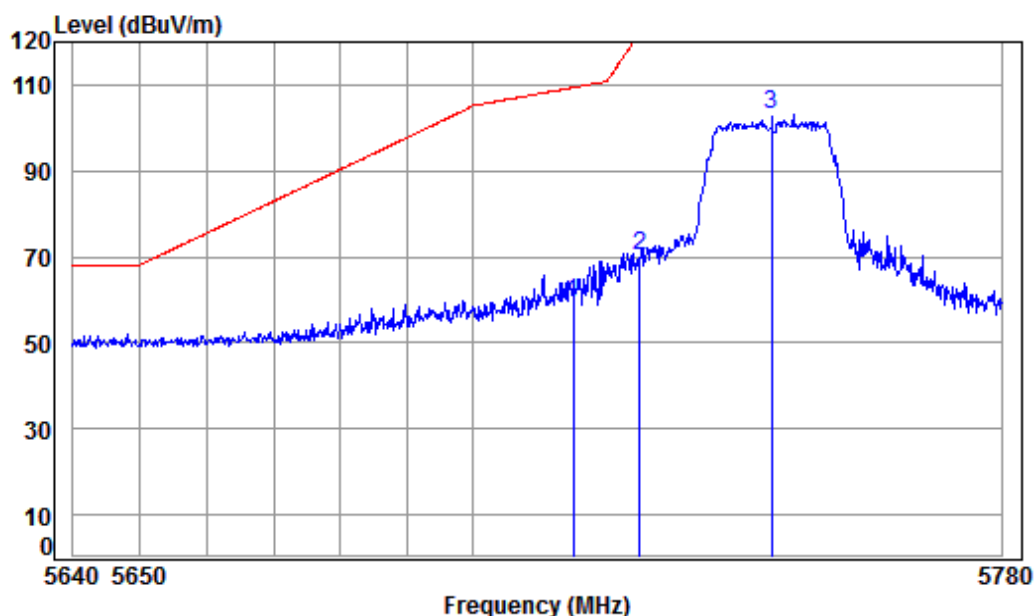

Condition: 3m HORIZONTAL

Job No : 0217RG

Mode : 5745 Band edge

: Ant 1 5G WIFI 11N CH149

		Cable	Ant	Preamp	Read	Limit	Over	
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1	5715.000	9.61	34.53	38.13	53.46	59.47	109.40	-49.93 peak
2	5725.000	9.64	34.54	38.13	64.05	70.10	122.20	-52.10 peak
3 pp	5745.000	9.71	34.55	38.12	96.99	103.13	125.20	-22.07 peak




SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch

Report No.: SZEM180200138802

Page: 429 of 817

Test mode:	802.11n(HT20)	Frequency(MHz):	5825	Peak	Vertical
------------	---------------	-----------------	------	------	----------

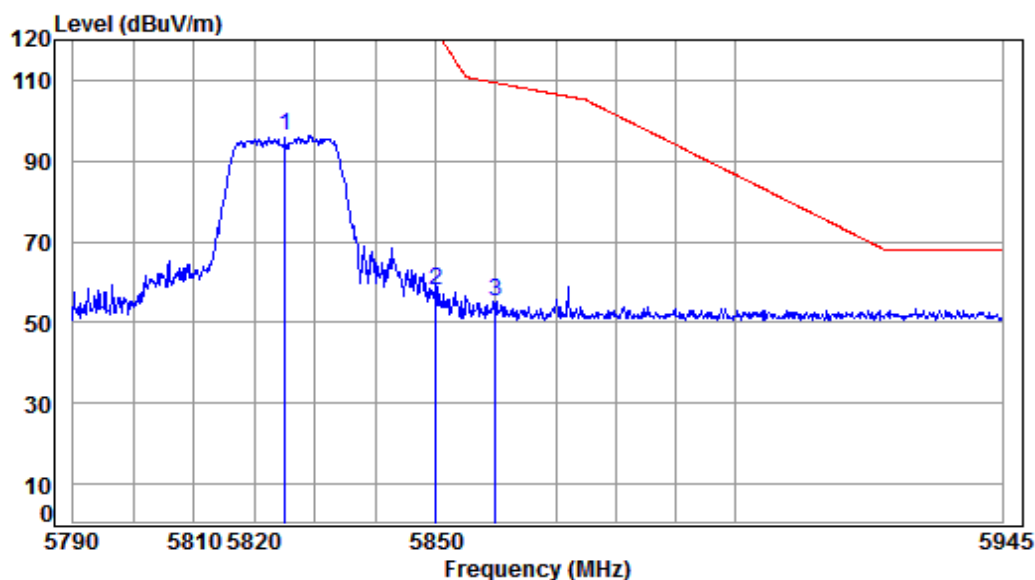

Condition: 3m VERTICAL

Job No : 0217RG

Mode : 5825 Band edge

: Ant 1 5G WIFI 11N CH165

		Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark
		MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	pp	5825.000	9.98	34.60	38.12	89.74	96.20	125.20	-29.00	peak
2		5850.000	10.07	34.61	38.11	51.57	58.14	122.20	-64.06	peak
3		5860.000	10.10	34.62	38.11	48.67	55.28	109.40	-54.12	peak




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM180200138802

Page: 430 of 817

Test mode:	802.11n(HT20)	Frequency(MHz):	5825	Peak	Horizontal
------------	---------------	-----------------	------	------	------------

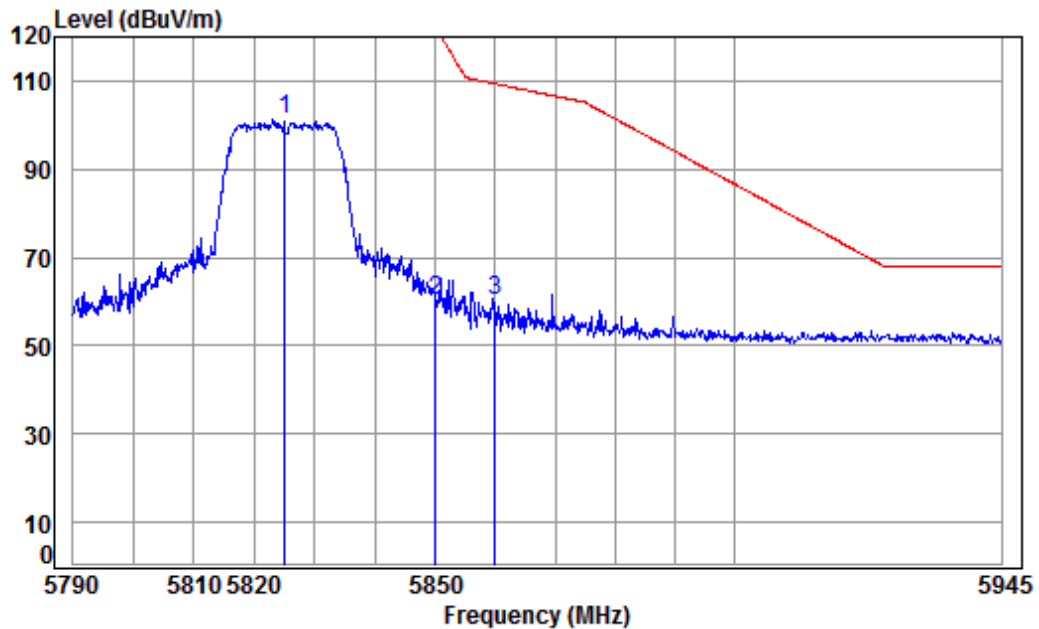

Condition: 3m HORIZONTAL

Job No : 0217RG

Mode : 5825 Band edge

: Ant 1 5G WIFI 11N CH165

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level		Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV		dBuV/m	dBuV/m	dB	
1 pp	5825.000	9.98	34.60	38.12	94.80		101.26	125.20	-23.94	peak
2	5850.000	10.07	34.61	38.11	53.51		60.08	122.20	-62.12	peak
3	5860.000	10.10	34.62	38.11	53.56		60.17	109.40	-49.23	peak




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM180200138802

Page: 431 of 817

Test mode:	802.11ac(HT20)	Frequency(MHz):	5180	Peak	Vertical
------------	----------------	-----------------	------	------	----------

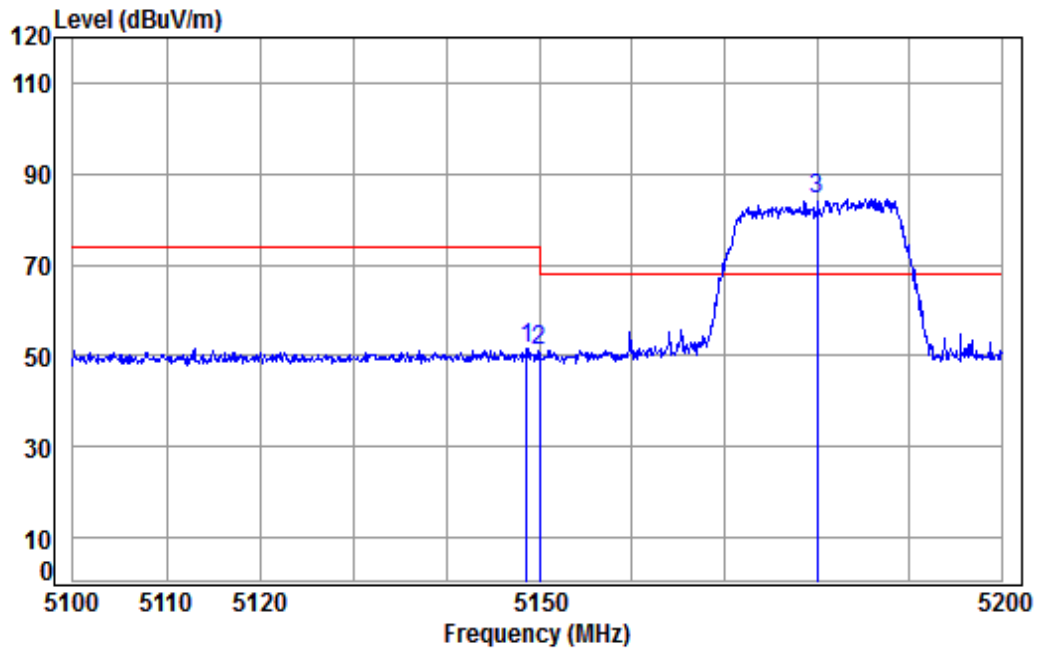

Condition: 3m VERTICAL

Job No : 0217RG

Mode : 5180 Band edge

: Ant 1 5G WIFI 11AC CH36

		Cable	Ant	Preamp	Read		Limit	Over	
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	5148.657	8.32	34.47	38.18	46.99	51.60	74.00	-22.40	Peak
2	5149.980	8.33	34.47	38.18	46.26	50.88	74.00	-23.12	Peak
3 pp	5180.000	8.37	34.46	38.18	79.74	84.39	68.20	16.19	Peak




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM180200138802

Page: 432 of 817

Test mode:	802.11ac(HT20)	Frequency(MHz):	5180	Average	Vertical
------------	----------------	-----------------	------	---------	----------

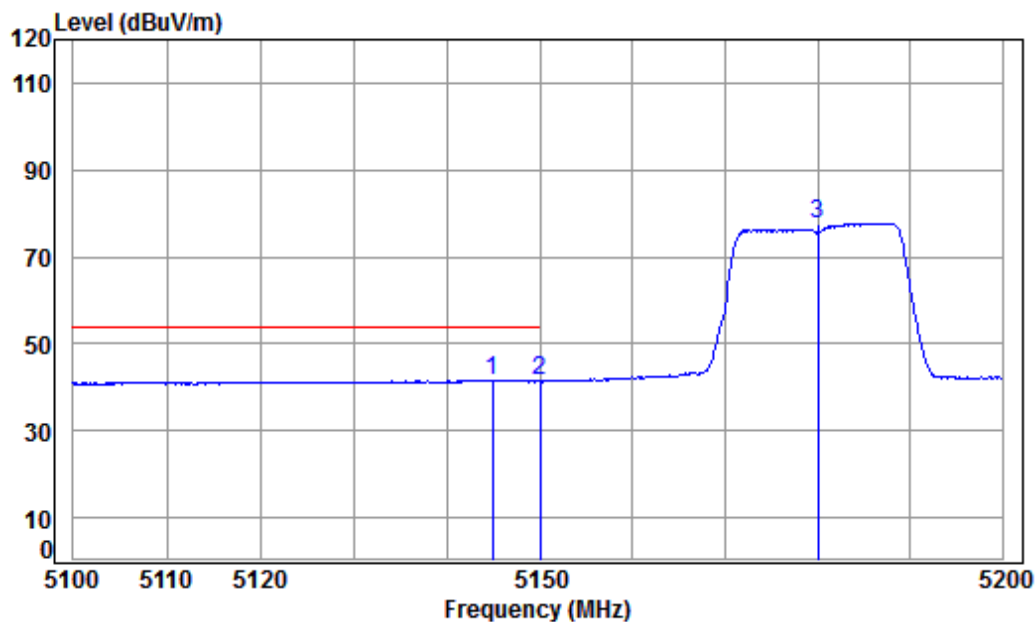

Condition: 3m VERTICAL

Job No : 0217RG

Mode : 5180 Band edge

: Ant 1 5G WIFI 11AC CH36

		Cable	Ant	Preamp	Read	Limit	Over	
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1	pp 5144.860	8.32	34.47	38.18	36.89	41.50	54.00	-12.50 Average
2	5149.980	8.33	34.47	38.18	36.78	41.40	54.00	-12.60 Average
3	5180.000	8.37	34.46	38.18	73.13	77.78	-----	----- Average




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM180200138802

Page: 433 of 817

Test mode:	802.11ac(HT20)	Frequency(MHz):	5180	Peak	Horizontal
------------	----------------	-----------------	------	------	------------

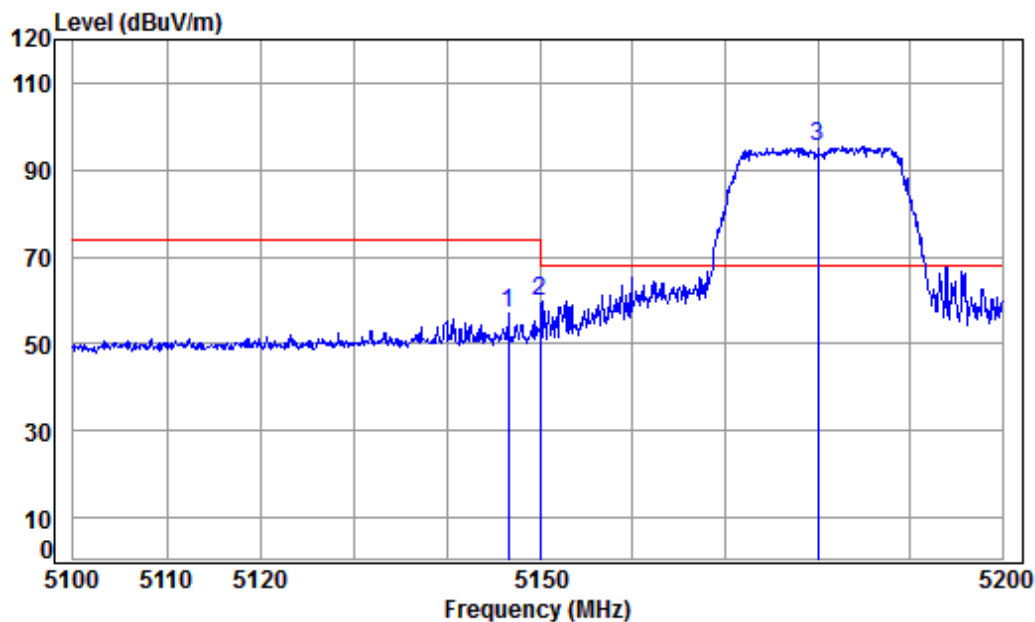

Condition: 3m HORIZONTAL

Job No : 0217RG

Mode : 5180 Band edge

: Ant 1 5G WIFI 11AC CH36

		Cable	Ant	Preamp	Read	Limit	Over	
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1	5146.558	8.32	34.47	38.18	52.23	56.84	74.00	-17.16 peak
2	5149.980	8.33	34.47	38.18	55.28	59.90	74.00	-14.10 peak
3 pp	5180.000	8.37	34.46	38.18	90.57	95.22	68.20	27.02 peak




SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch

Report No.: SZEM180200138802

Page: 434 of 817

Test mode:	802.11ac(HT20)	Frequency(MHz):	5180	Average	Horizontal
------------	----------------	-----------------	------	---------	------------

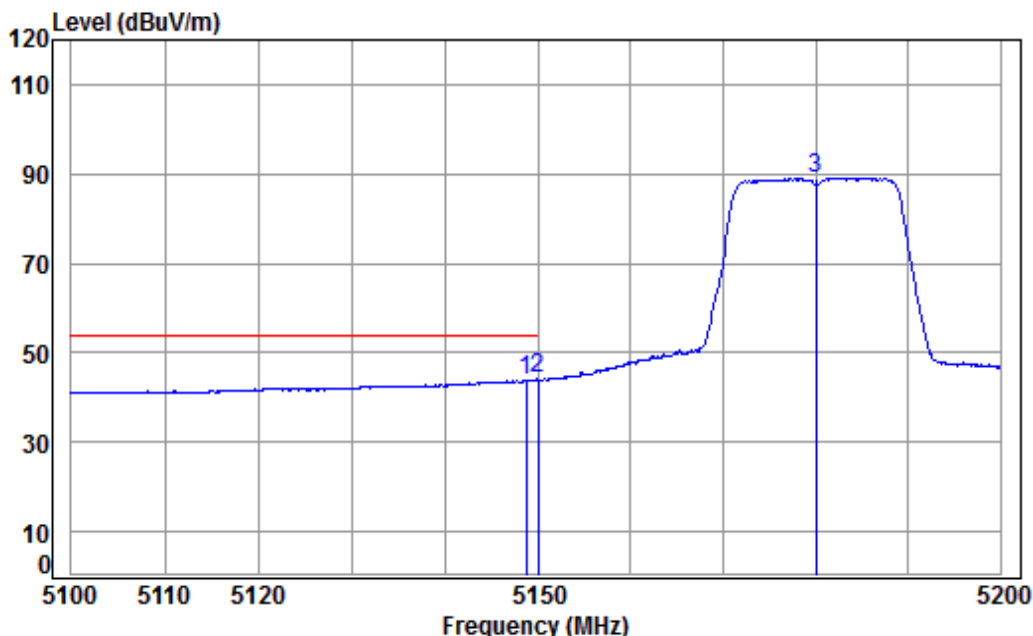

Condition: 3m HORIZONTAL

Job No : 0217RG

Mode : 5180 Band edge

: Ant 1 5G WIFI 11AC CH36

		Cable	Ant	Preamp	Read	Limit	Over	
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1	5148.757	8.32	34.47	38.18	39.23	43.84	54.00	-10.16 Average
2	pp 5149.980	8.33	34.47	38.18	39.44	44.06	54.00	-9.94 Average
3	5180.000	8.37	34.46	38.18	84.34	88.99	-----	----- Average




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM180200138802

Page: 435 of 817

Test mode:	802.11ac(HT20)	Frequency(MHz):	5240	Peak	Vertical
------------	----------------	-----------------	------	------	----------

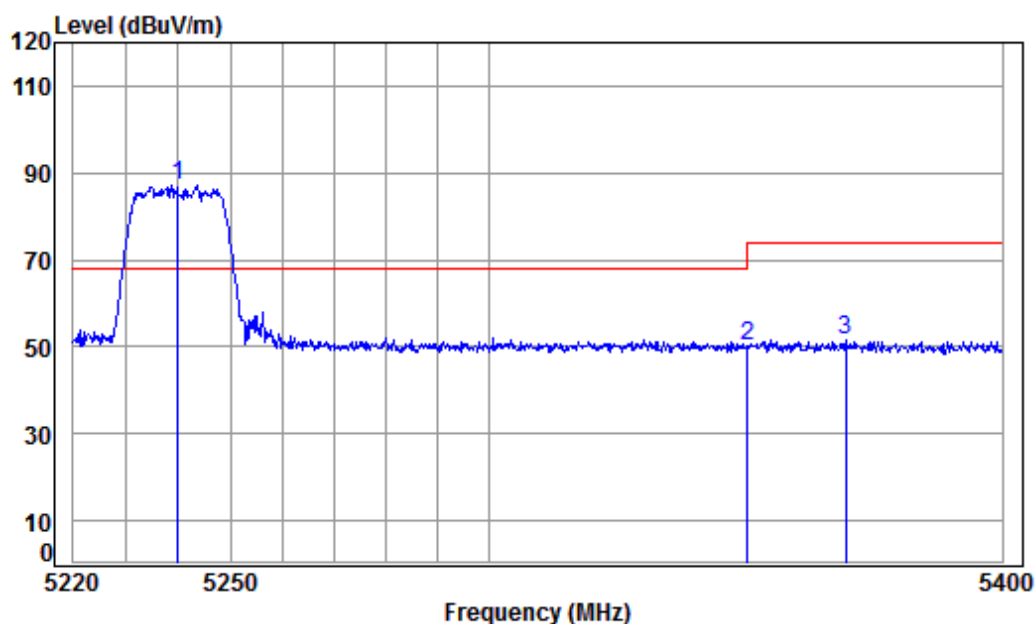

Condition: 3m VERTICAL

Job No : 0217RG

Mode : 5240 Band edge

: Ant 1 5G WIFI 11AC CH48

		Cable	Ant	Preamp	Read	Limit	Over	
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1	pp 5240.000	8.46	34.45	38.17	82.38	87.12	68.20	18.92 Peak
2	5350.020	8.63	34.43	38.16	45.39	50.29	74.00	-23.71 Peak
3	5369.332	8.66	34.43	38.16	46.56	51.49	74.00	-22.51 Peak




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM180200138802

Page: 436 of 817

Test mode:	802.11ac(HT20)	Frequency(MHz):	5240	Average	Vertical
------------	----------------	-----------------	------	---------	----------

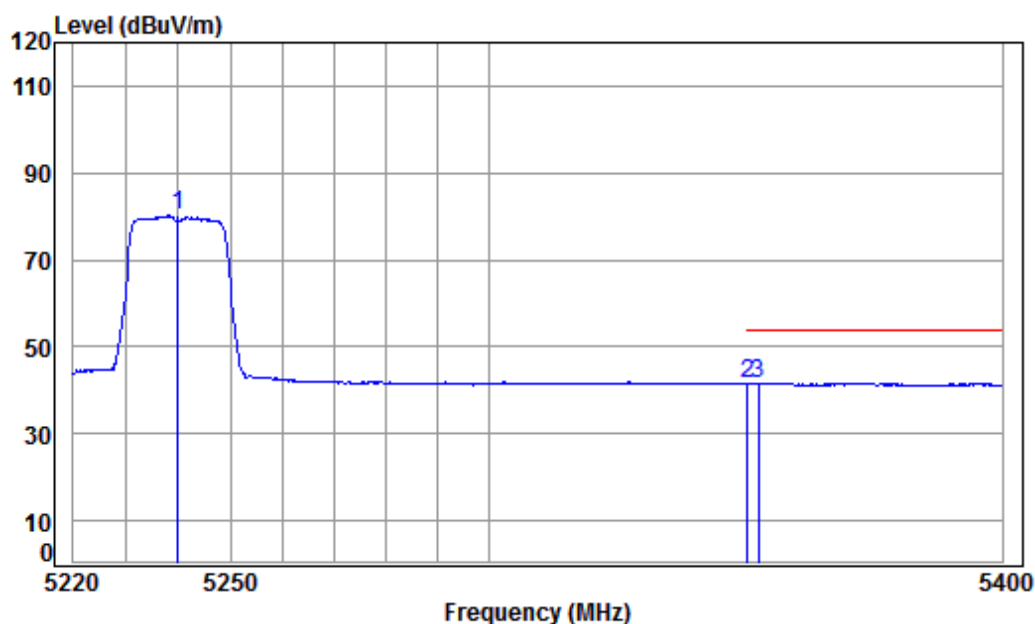

Condition: 3m VERTICAL

Job No : 0217RG

Mode : 5240 Band edge

: Ant 1 5G WIFI 11AC CH48

		Cable	Ant	Preamp	Read	Limit	Over	
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1	5240.000	8.46	34.45	38.17	75.40	80.14	-----	----- Average
2	5350.020	8.63	34.43	38.16	36.70	41.60	54.00	-12.40 Average
3 pp	5352.249	8.63	34.43	38.16	36.80	41.70	54.00	-12.30 Average




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM180200138802

Page: 437 of 817

Test mode:	802.11ac(HT20)	Frequency(MHz):	5240	Peak	Horizontal
------------	----------------	-----------------	------	------	------------

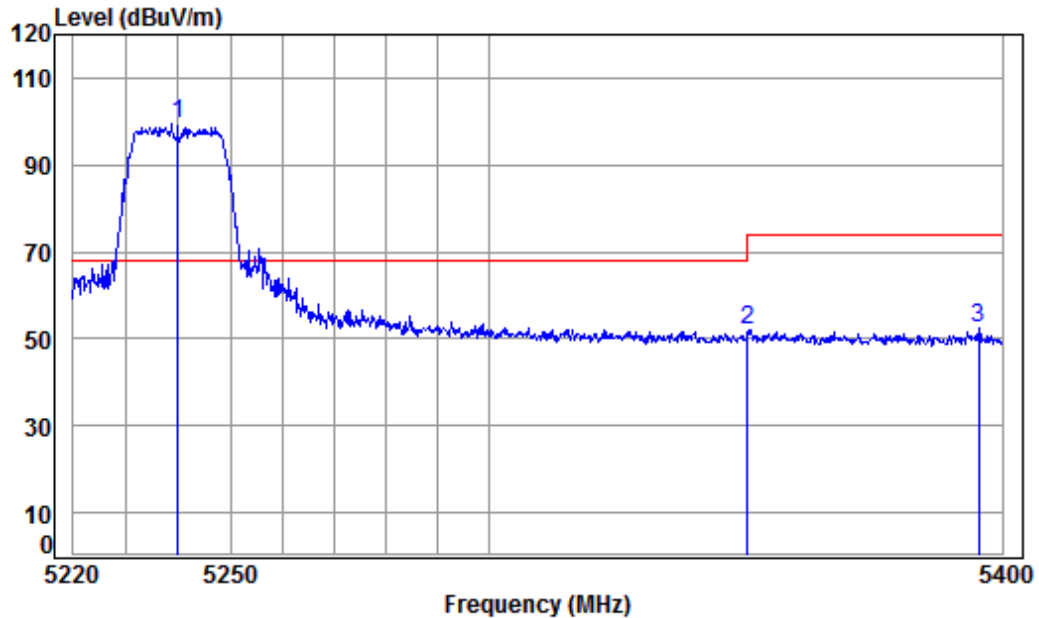

Condition: 3m HORIZONTAL

Job No : 0217RG

Mode : 5240 Band edge

: Ant 1 5G WIFI 11AC CH48

		Cable	Ant	Preamp	Read	Limit	Over	
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1 pp	5240.000	8.46	34.45	38.17	94.63	99.37	68.20	31.17 peak
2	5350.020	8.63	34.43	38.16	46.97	51.87	74.00	-22.13 peak
3	5395.425	8.70	34.42	38.16	47.35	52.31	74.00	-21.69 peak




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM180200138802

Page: 438 of 817

Test mode:	802.11ac(HT20)	Frequency(MHz):	5240	Average	Horizontal
------------	----------------	-----------------	------	---------	------------

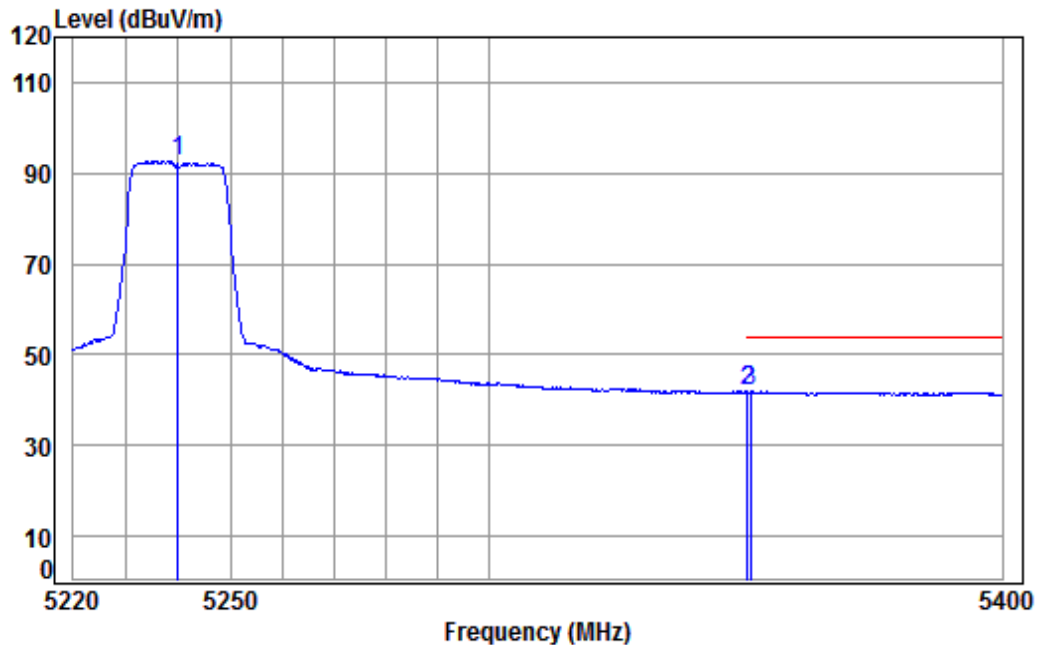

Condition: 3m HORIZONTAL

Job No : 0217RG

Mode : 5240 Band edge

: Ant 1 5G WIFI 11AC CH48

		Cable	Ant	Preamp	Read	Limit	Over	
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1	5240.000	8.46	34.45	38.17	87.79	92.53	-----	Average
2	5350.020	8.63	34.43	38.16	36.91	41.81	54.00	-12.19 Average
3	5350.616	8.63	34.43	38.16	36.92	41.82	54.00	-12.18 Average




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM180200138802

Page: 439 of 817

Test mode:	802.11ac(HT20)	Frequency(MHz):	5260	Peak	Vertical
------------	----------------	-----------------	------	------	----------

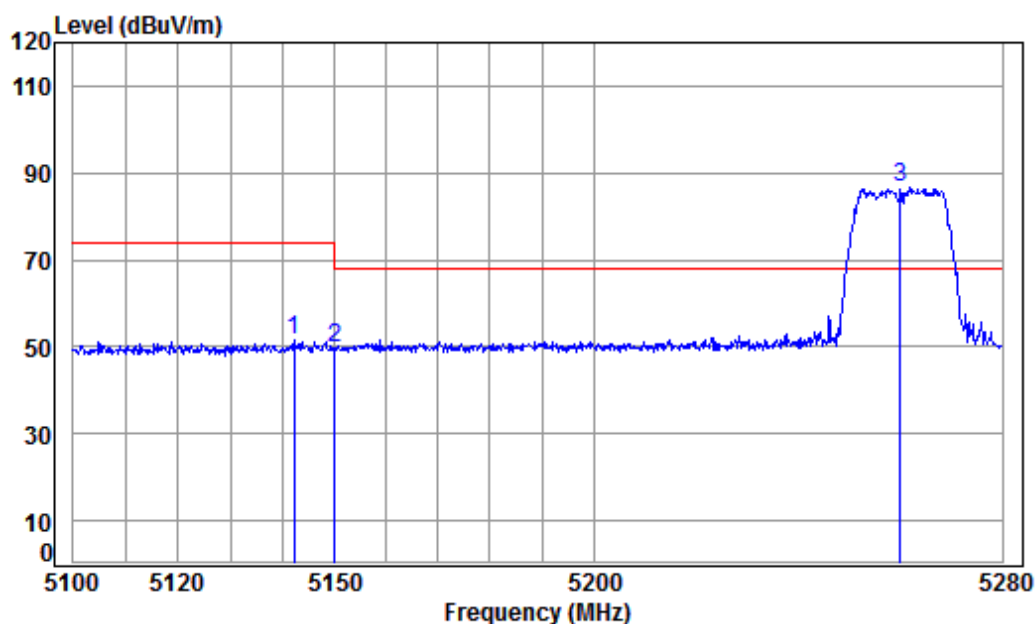

Condition: 3m VERTICAL

Job No : 0217RG

Mode : 5260 Band edge

: Ant 1 5G WIFI 11AC CH52

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit	Over	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	5142.275	8.31	34.47	38.18	47.01	51.61	74.00	-22.39	Peak
2	5149.980	8.33	34.47	38.18	45.13	49.75	74.00	-24.25	Peak
3 pp	5260.000	8.49	34.45	38.17	81.70	86.47	68.20	18.27	Peak




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM180200138802

Page: 440 of 817

Test mode:	802.11ac(HT20)	Frequency(MHz):	5260	Average	Vertical
------------	----------------	-----------------	------	---------	----------

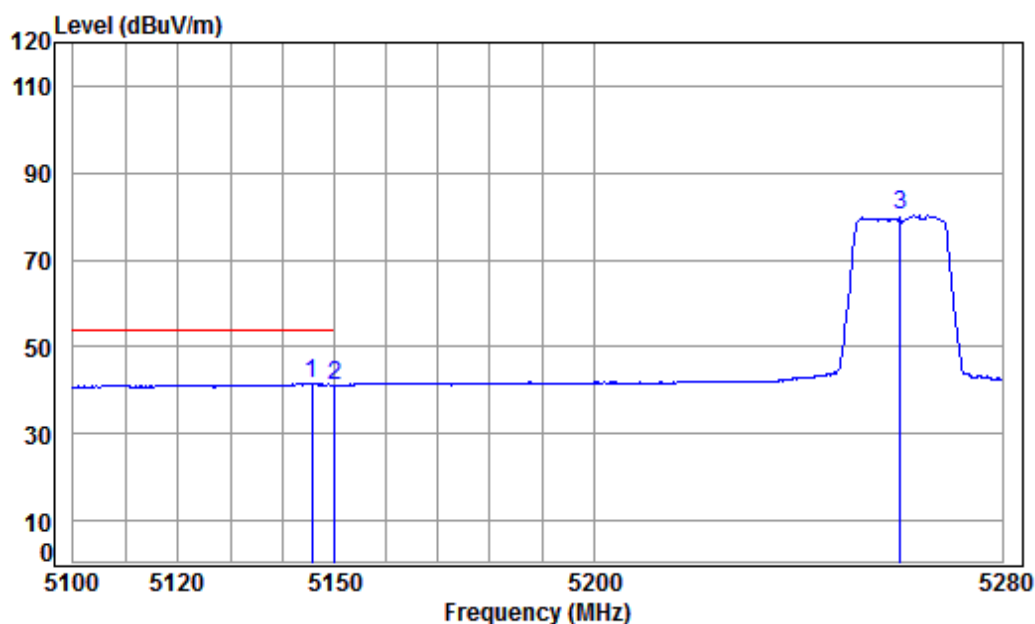

Condition: 3m VERTICAL

Job No : 0217RG

Mode : 5260 Band edge

: Ant 1 5G WIFI 11AC CH52

		Cable	Ant	Preamp	Read	Limit	Over	
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1 pp	5145.666	8.32	34.47	38.18	36.84	41.45	54.00	-12.55 Average
2	5149.980	8.33	34.47	38.18	36.66	41.28	54.00	-12.72 Average
3	5260.000	8.49	34.45	38.17	75.39	80.16	-----	----- Average




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM180200138802

Page: 441 of 817

Test mode:	802.11ac(HT20)	Frequency(MHz):	5260	Peak	Horizontal
------------	----------------	-----------------	------	------	------------

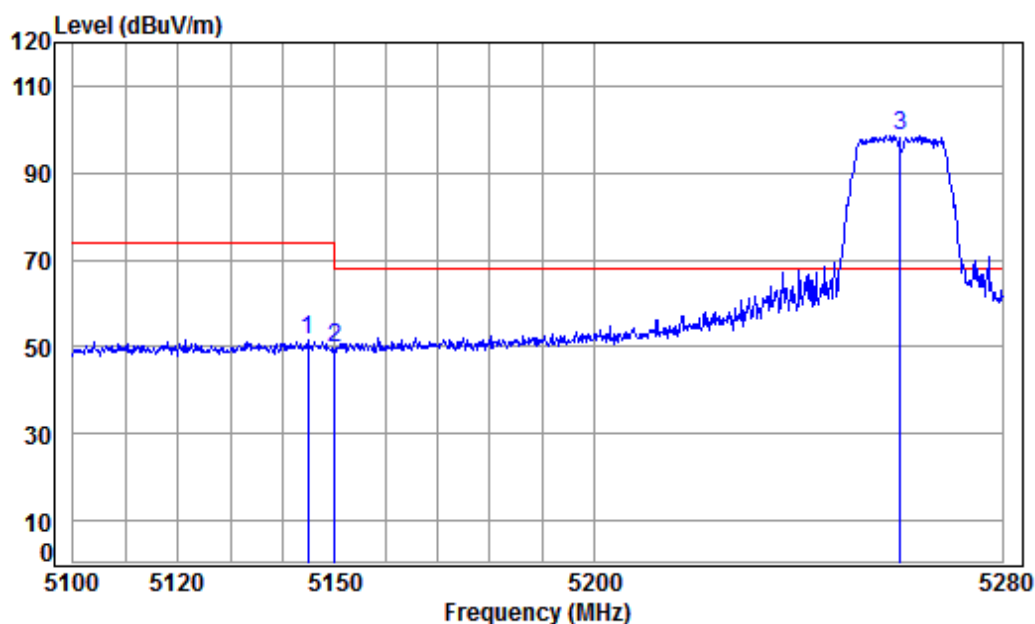

Condition: 3m HORIZONTAL

Job No : 0217RG

Mode : 5260 Band edge

: Ant 1 5G WIFI 11AC CH52

	Freq	Cable Loss	Ant Factor	Preamplifier Factor	Read Level	Limit Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	5144.952	8.32	34.47	38.18	47.09	51.70	74.00	-22.30	peak
2	5149.980	8.33	34.47	38.18	45.15	49.77	74.00	-24.23	peak
3 pp	5260.000	8.49	34.45	38.17	93.80	98.57	68.20	30.37	peak




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM180200138802

Page: 442 of 817

Test mode:	802.11ac(HT20)	Frequency(MHz):	5260	Average	Horizontal
------------	----------------	-----------------	------	---------	------------

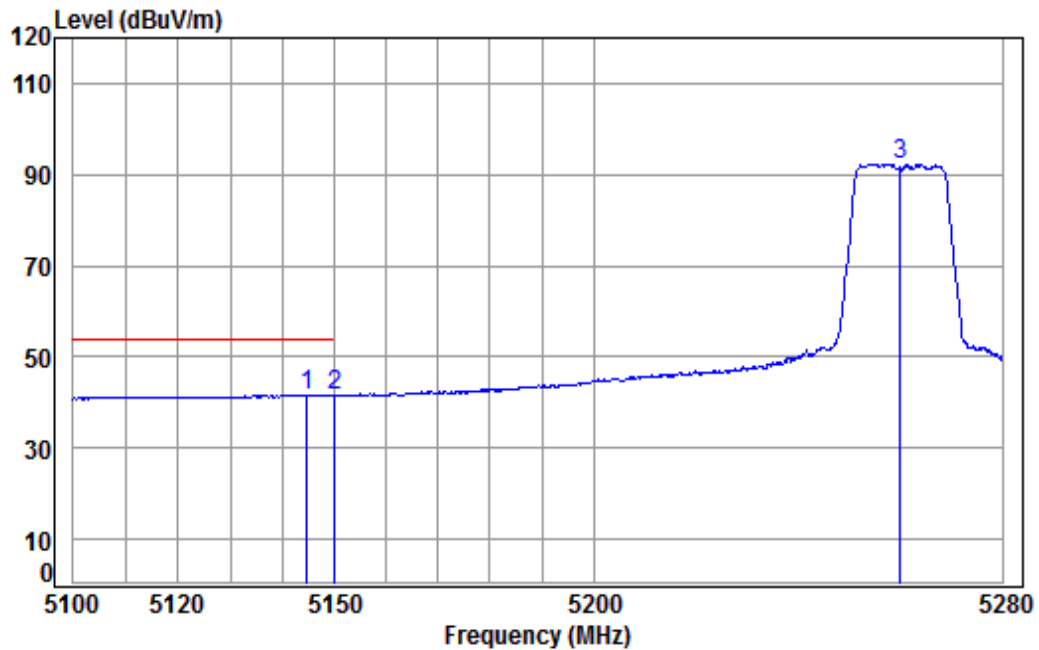

Condition: 3m HORIZONTAL

Job No : 0217RG

Mode : 5260 Band edge

: Ant 1 5G WIFI 11AC CH52

		Cable	Ant	Preamp	Read		Limit	Over	
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1 pp	5144.773	8.32	34.47	38.18	36.97	41.58	54.00	-12.42	Average
2	5149.980	8.33	34.47	38.18	36.90	41.52	54.00	-12.48	Average
3	5260.000	8.49	34.45	38.17	87.48	92.25	-----	-----	Average




SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch

Report No.: SZEM180200138802

Page: 443 of 817

Test mode:	802.11ac(HT20)	Frequency(MHz):	5320	Peak	Vertical
------------	----------------	-----------------	------	------	----------

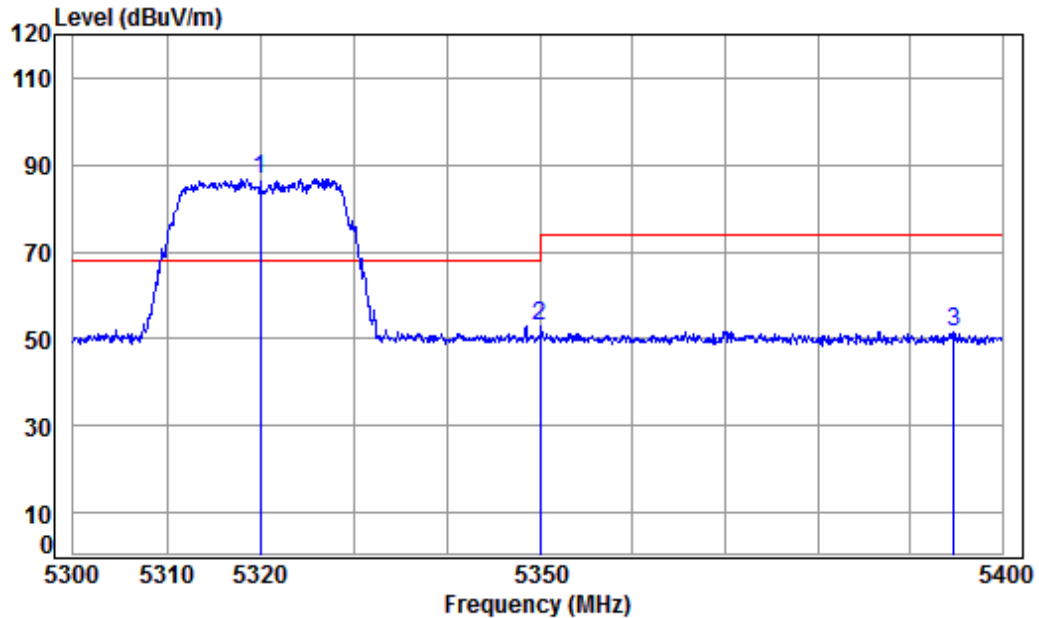

Condition: 3m VERTICAL

Job No : 0217RG

Mode : 5320 Band edge

: Ant 1 5G WIFI 11AC CH64

		Cable	Ant	Preamp	Read	Limit	Over	
Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1 pp 5320.000	8.58	34.43	38.17	82.02	86.86	68.20	18.66	Peak
2 5350.020	8.63	34.43	38.16	47.95	52.85	74.00	-21.15	Peak
3 5394.754	8.70	34.42	38.16	46.81	51.77	74.00	-22.23	Peak




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM180200138802

Page: 444 of 817

Test mode:	802.11ac(HT20)	Frequency(MHz):	5320	Average	Vertical
------------	----------------	-----------------	------	---------	----------

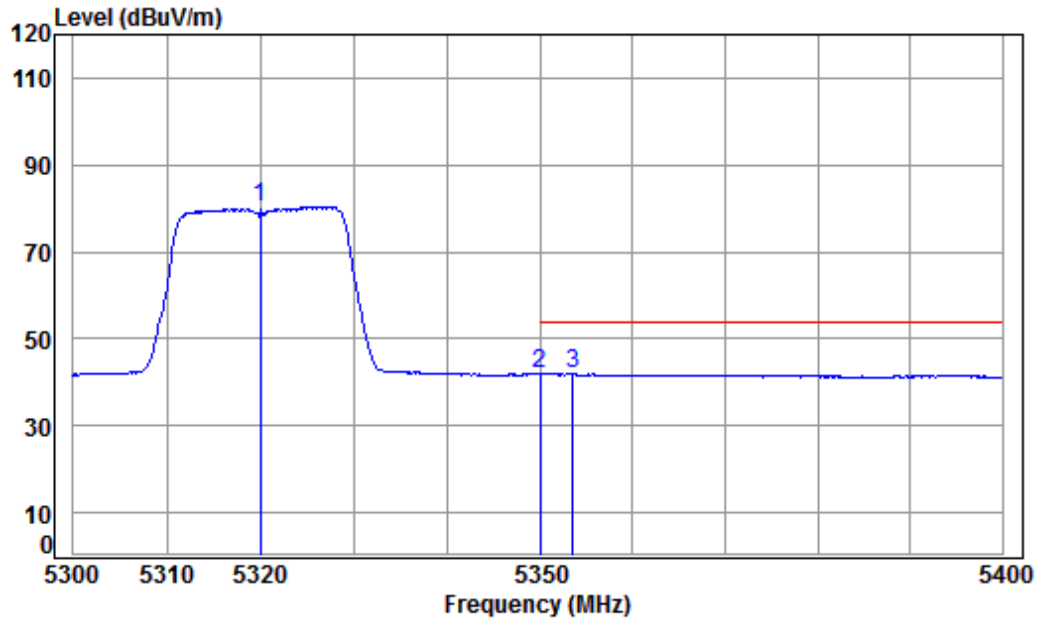

Condition: 3m VERTICAL

Job No : 0217RG

Mode : 5320 Band edge

: Ant 1 5G WIFI 11AC CH64

	Freq	Cable Loss	Ant Factor	Preamplifier Factor	Read Level	Limit Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	5320.000	8.58	34.43	38.17	75.53	80.37	-----	-----	Average
2	5350.020	8.63	34.43	38.16	36.97	41.87	54.00	-12.13	Average
3 pp	5353.568	8.63	34.43	38.16	37.13	42.03	54.00	-11.97	Average




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM180200138802

Page: 445 of 817

Test mode:	802.11ac(HT20)	Frequency(MHz):	5320	Peak	Horizontal
------------	----------------	-----------------	------	------	------------

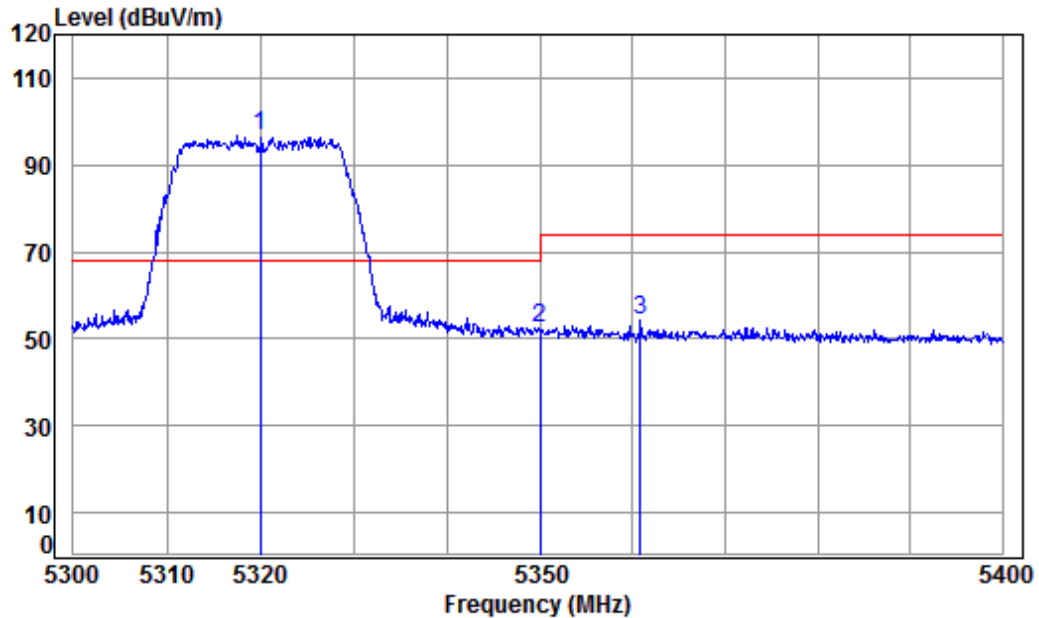

Condition: 3m HORIZONTAL

Job No : 0217RG

Mode : 5320 Band edge

: Ant 1 5G WIFI 11AC CH64

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1 pp	5320.000	8.58	34.43	38.17	91.70	96.54	68.20	28.34	peak
2	5350.020	8.63	34.43	38.16	47.43	52.33	74.00	-21.67	peak
3	5360.878	8.65	34.43	38.16	49.16	54.08	74.00	-19.92	peak




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM180200138802

Page: 446 of 817

Test mode:	802.11ac(HT20)	Frequency(MHz):	5320	Average	Horizontal
------------	----------------	-----------------	------	---------	------------

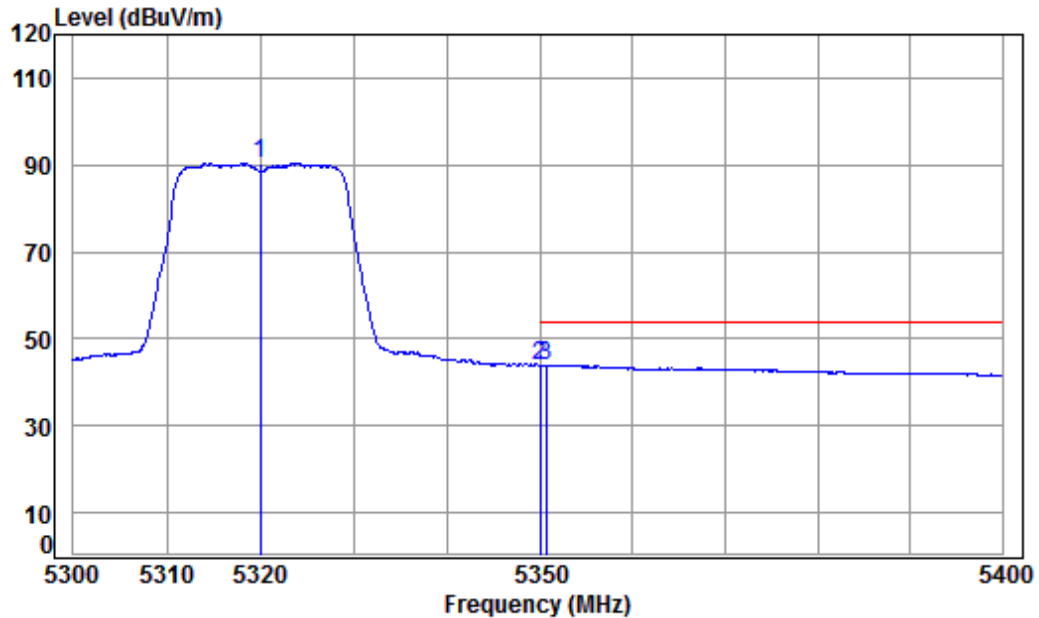

Condition: 3m HORIZONTAL

Job No : 0217RG

Mode : 5320 Band edge

: Ant 1 5G WIFI 11AC CH64

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Limit Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	5320.000	8.58	34.43	38.17	85.64	90.48	-----	-----	Average
2	5350.020	8.63	34.43	38.16	39.01	43.91	54.00	-10.09	Average
3 pp	5350.667	8.63	34.43	38.16	39.13	44.03	54.00	-9.97	Average




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM180200138802

Page: 447 of 817

Test mode:	802.11ac(HT20)	Frequency(MHz):	5500	Peak	Vertical
------------	----------------	-----------------	------	------	----------

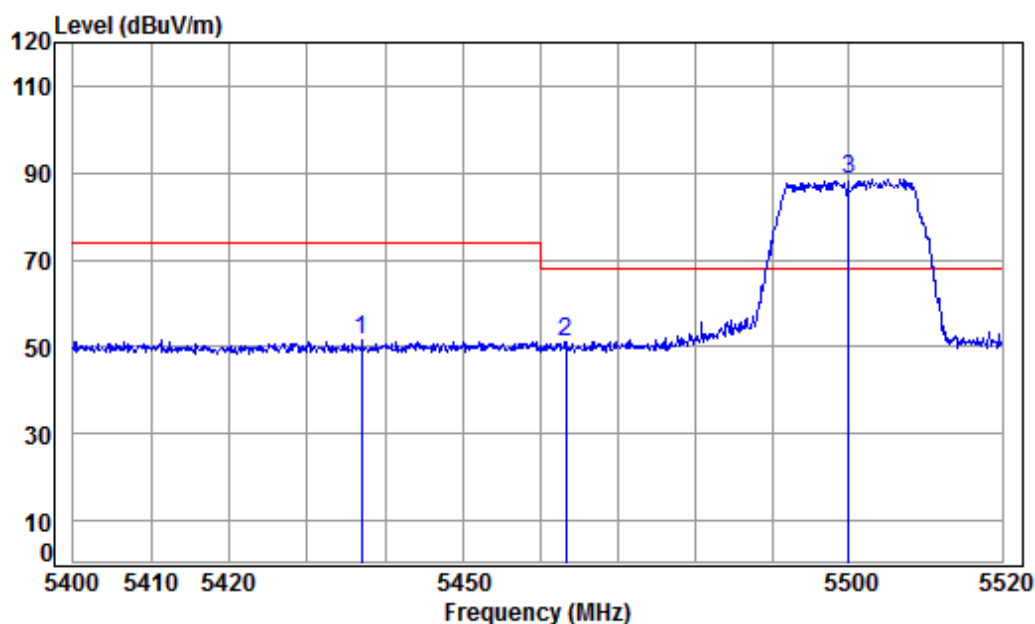

Condition: 3m VERTICAL

Job No : 0217RG

Mode : 5500 Band edge

: Ant 1 5G WIFI 11AC CH100

	Freq	Cable Loss	Ant Factor	Preamplifier Factor	Read Level	Limit Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	5437.038	8.76	34.41	38.15	46.69	51.71	74.00	-22.29	Peak
2	5463.271	8.80	34.41	38.15	46.04	51.10	68.20	-17.10	peak
3 pp	5500.000	8.85	34.40	38.15	83.63	88.73	68.20	20.53	Peak




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM180200138802

Page: 448 of 817

Test mode:	802.11ac(HT20)	Frequency(MHz):	5500	Average	Vertical
------------	----------------	-----------------	------	---------	----------

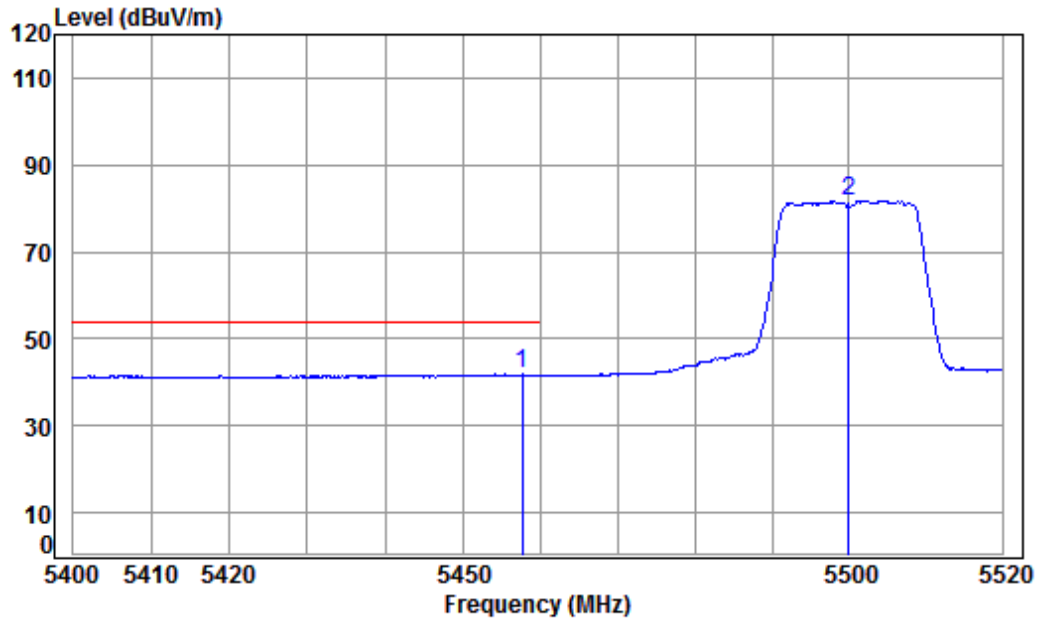

Condition: 3m VERTICAL

Job No : 0217RG

Mode : 5500 Band edge

: Ant 1 5G WIFI 11AC CH100

		Cable	Ant	Preamp	Read	Limit	Over	
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1 pp	5457.631	8.79	34.41	38.15	36.82	41.87	54.00	-12.13 Average
2	5500.000	8.85	34.40	38.15	76.75	81.85	-----	----- Average




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM180200138802

Page: 449 of 817

Test mode:	802.11ac(HT20)	Frequency(MHz):	5500	Peak	Horizontal
------------	----------------	-----------------	------	------	------------

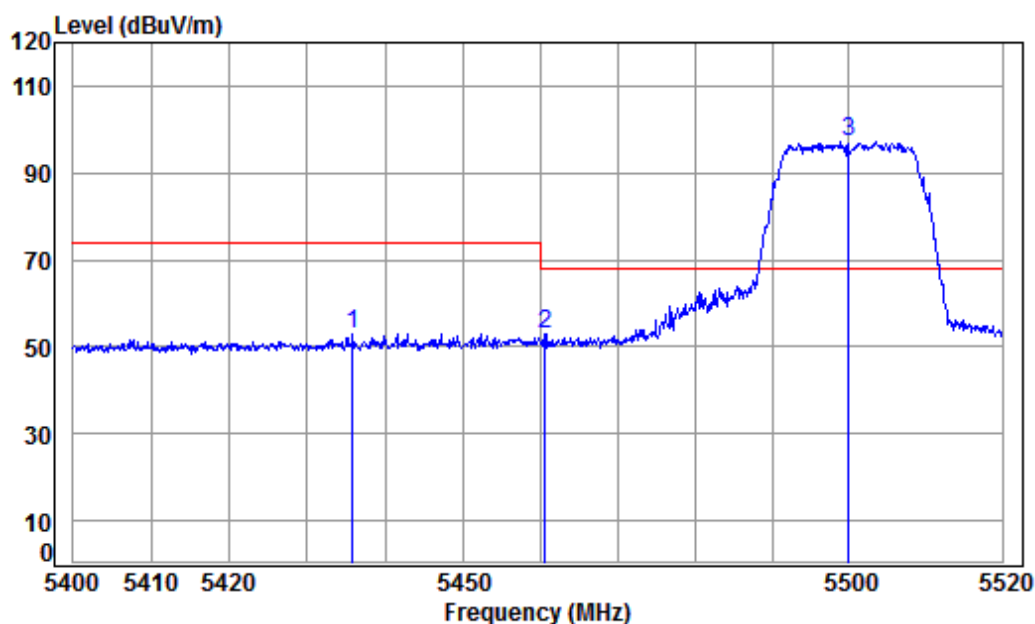

Condition: 3m HORIZONTAL

Job No : 0217RG

Mode : 5500 Band edge

: Ant 1 5G WIFI 11AC CH100

	Freq	Cable Loss	Ant Factor	Preamplifier Factor	Read Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1	5435.843	8.76	34.41	38.15	48.04	53.06	74.00	-20.94 peak
2	5460.630	8.79	34.41	38.15	47.84	52.89	68.20	-15.31 peak
3 pp	5500.000	8.85	34.40	38.15	91.99	97.09	68.20	28.89 peak




SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch

Report No.: SZEM180200138802

Page: 450 of 817

Test mode:	802.11ac(HT20)	Frequency(MHz):	5500	Average	Horizontal
------------	----------------	-----------------	------	---------	------------

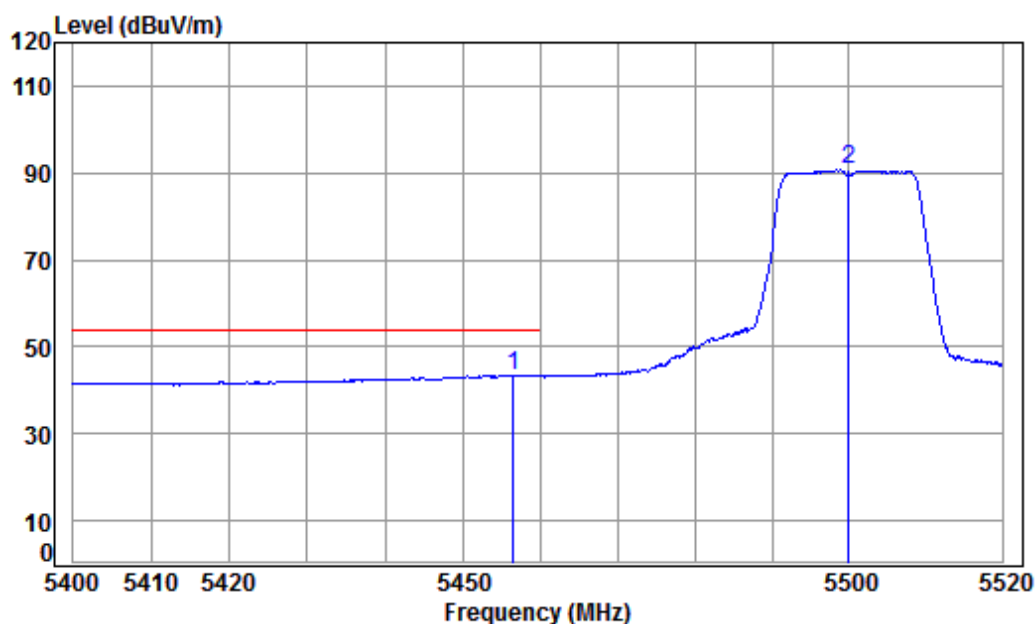

Condition: 3m HORIZONTAL

Job No : 0217RG

Mode : 5500 Band edge

: Ant 1 5G WIFI 11AC CH100

		Cable	Ant	Preamp	Read	Limit	Over	
Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1 pp 5456.551	8.79	34.41	38.15	38.45	43.50	54.00	-10.50	Average
2 5500.000	8.85	34.40	38.15	85.51	90.61	-----	-----	Average




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM180200138802

Page: 451 of 817

Test mode:	802.11ac(HT20)	Frequency(MHz):	5700	Peak	Vertical
------------	----------------	-----------------	------	------	----------

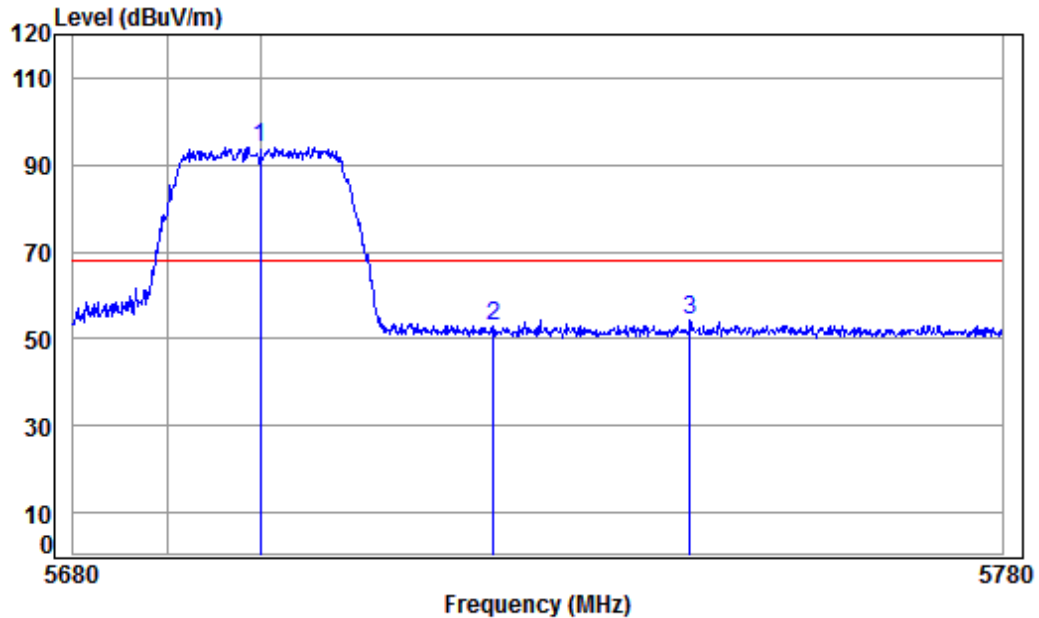

Condition: 3m VERTICAL

Job No : 0217RG

Mode : 5700 Band edge

: Ant 1 5G WIFI 11AC CH140

		Cable	Ant	Preamp	Read	Limit	Over	
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1	pp 5700.000	9.56	34.52	38.13	88.06	94.01	68.20	25.81 Peak
2	5725.000	9.64	34.54	38.13	46.78	52.83	68.20	-15.37 Peak
3	5746.205	9.72	34.55	38.12	48.28	54.43	68.20	-13.77 Peak




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM180200138802

Page: 452 of 817

Test mode:	802.11ac(HT20)	Frequency(MHz):	5700	Peak	Horizontal
------------	----------------	-----------------	------	------	------------

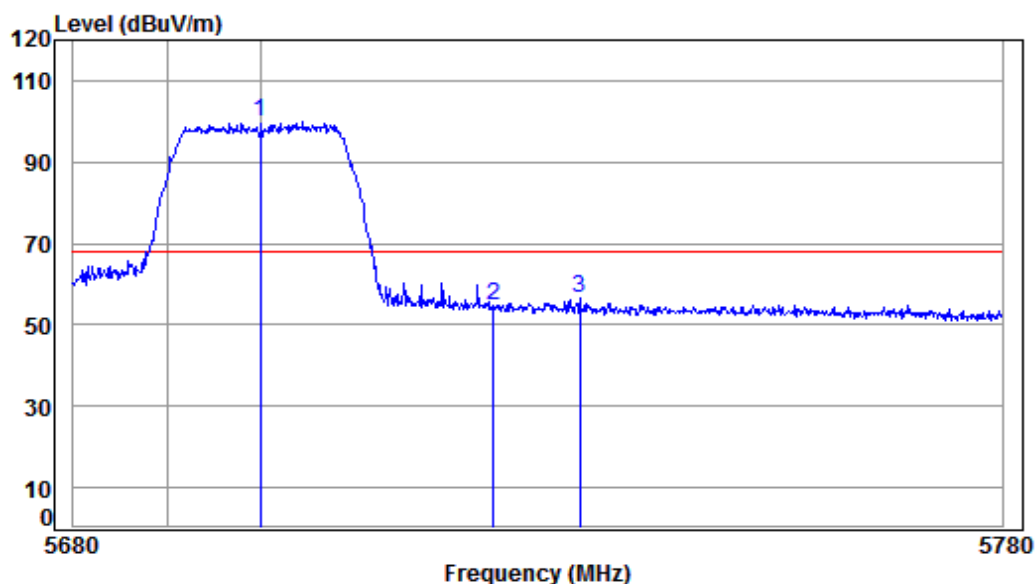

Condition: 3m HORIZONTAL

Job No : 0217RG

Mode : 5700 Band edge

: Ant 1 5G WIFI 11AC CH140

		Cable	Ant	Preamp	Read		Limit	Over	
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1 pp	5700.000	9.56	34.52	38.13	93.78	99.73	68.20	31.53	peak
2	5725.000	9.64	34.54	38.13	48.80	54.85	68.20	-13.35	peak
3	5734.284	9.67	34.54	38.12	50.50	56.59	68.20	-11.61	peak




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM180200138802

Page: 453 of 817

Test mode:	802.11ac(HT20)	Frequency(MHz):	5745	Peak	Vertical
------------	----------------	-----------------	------	------	----------

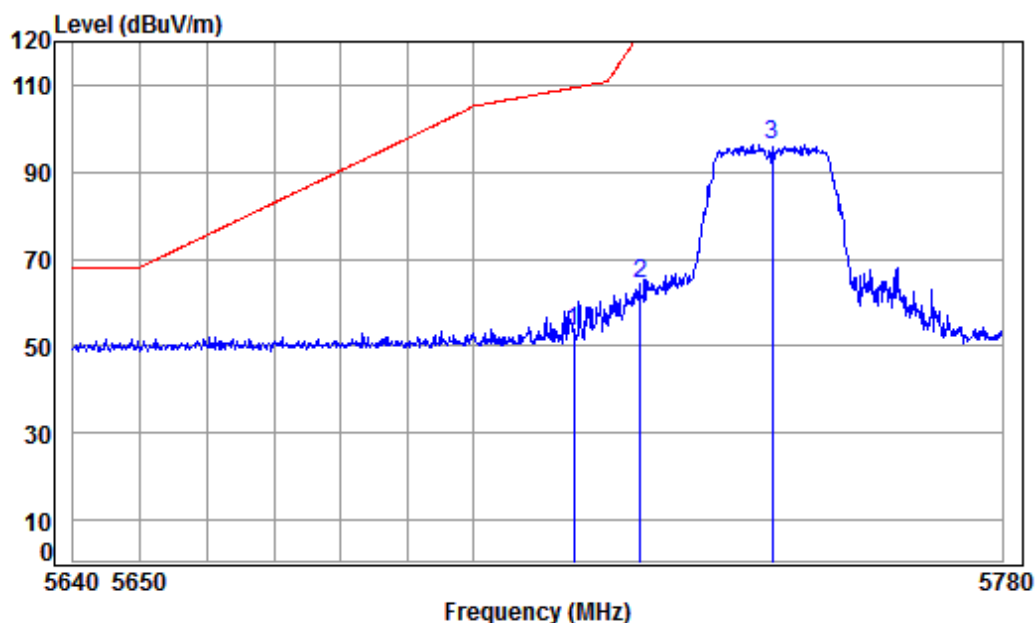

Condition: 3m VERTICAL

Job No : 0217RG

Mode : 5745 Band edge

: Ant 1 5G WIFI 11AC CH149

		Cable	Ant	Preamp	Read		Limit	Over	
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	5715.000	9.61	34.53	38.13	47.33	53.34	109.40	-56.06	peak
2	5725.000	9.64	34.54	38.13	58.19	64.24	122.20	-57.96	peak
3 pp	5745.000	9.71	34.55	38.12	90.05	96.19	125.20	-29.01	peak




SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch

Report No.: SZEM180200138802

Page: 454 of 817

Test mode:	802.11ac(HT20)	Frequency(MHz):	5745	Peak	Horizontal
------------	----------------	-----------------	------	------	------------

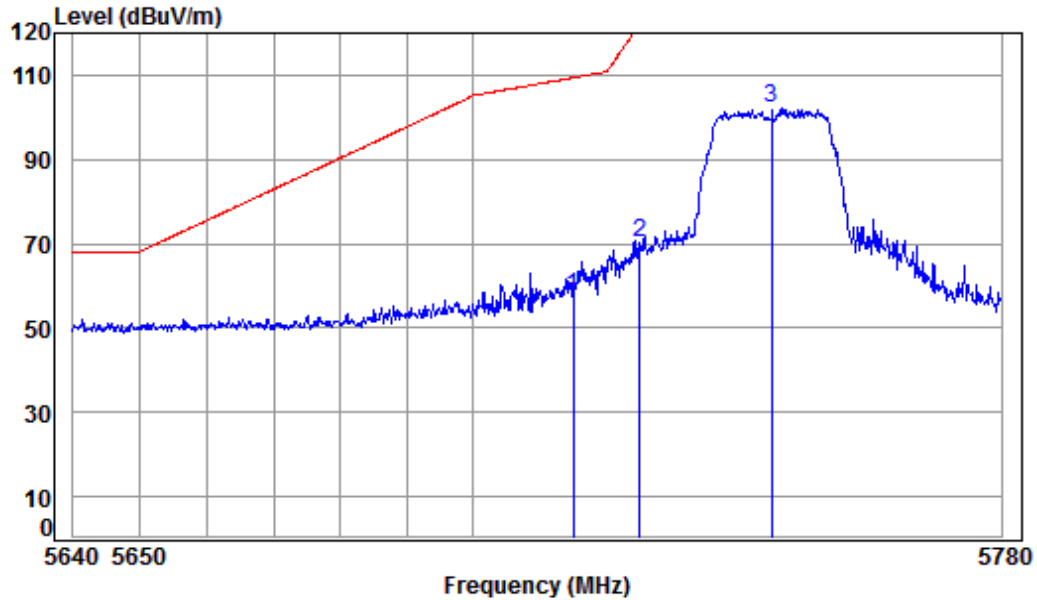

Condition: 3m HORIZONTAL

Job No : 0217RG

Mode : 5745 Band edge

: Ant 1 5G WIFI 11AC CH149

		Cable	Ant	Preamp	Read	Limit	Over	
Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	5715.000	9.61	34.53	38.13	51.49	57.50	109.40	-51.90 peak
2	5725.000	9.64	34.54	38.13	64.12	70.17	122.20	-52.03 peak
3 pp	5745.000	9.71	34.55	38.12	95.94	102.08	125.20	-23.12 peak




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM180200138802

Page: 455 of 817

Test mode:	802.11ac(HT20)	Frequency(MHz):	5825	Peak	Vertical
------------	----------------	-----------------	------	------	----------

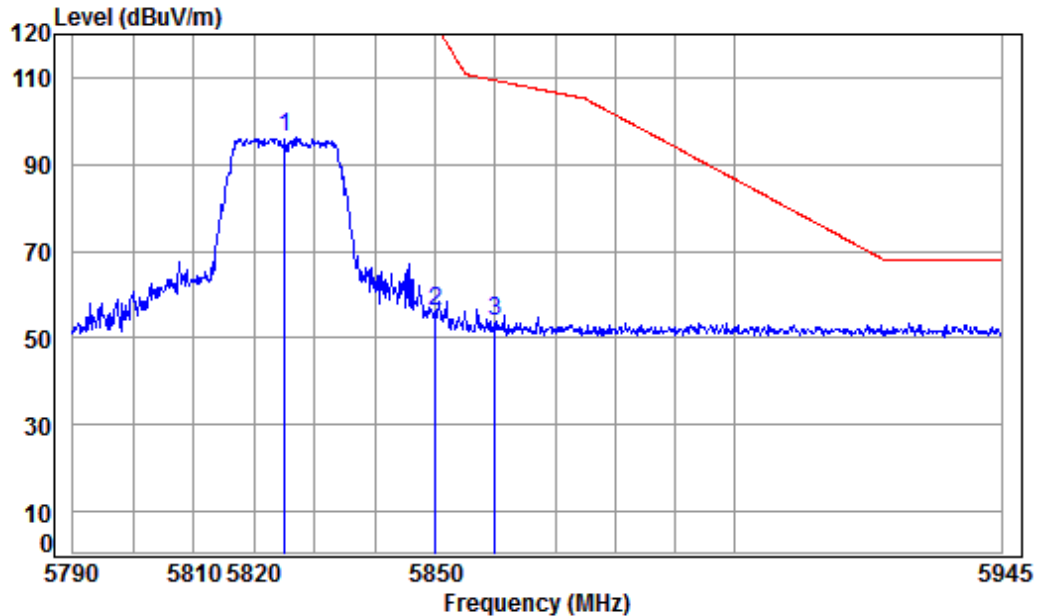

Condition: 3m VERTICAL

Job No : 0217RG

Mode : 5825 Band edge

: Ant 1 5G WIFI 11AC CH165

		Cable	Ant	Preamp	Read		Limit	Over	
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	pp 5825.000	9.98	34.60	38.12	89.68	96.14	125.20	-29.06	peak
2	5850.000	10.07	34.61	38.11	49.58	56.15	122.20	-66.05	peak
3	5860.000	10.10	34.62	38.11	47.38	53.99	109.40	-55.41	peak




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM180200138802

Page: 456 of 817

Test mode:	802.11ac(HT20)	Frequency(MHz):	5825	Peak	Horizontal
------------	----------------	-----------------	------	------	------------

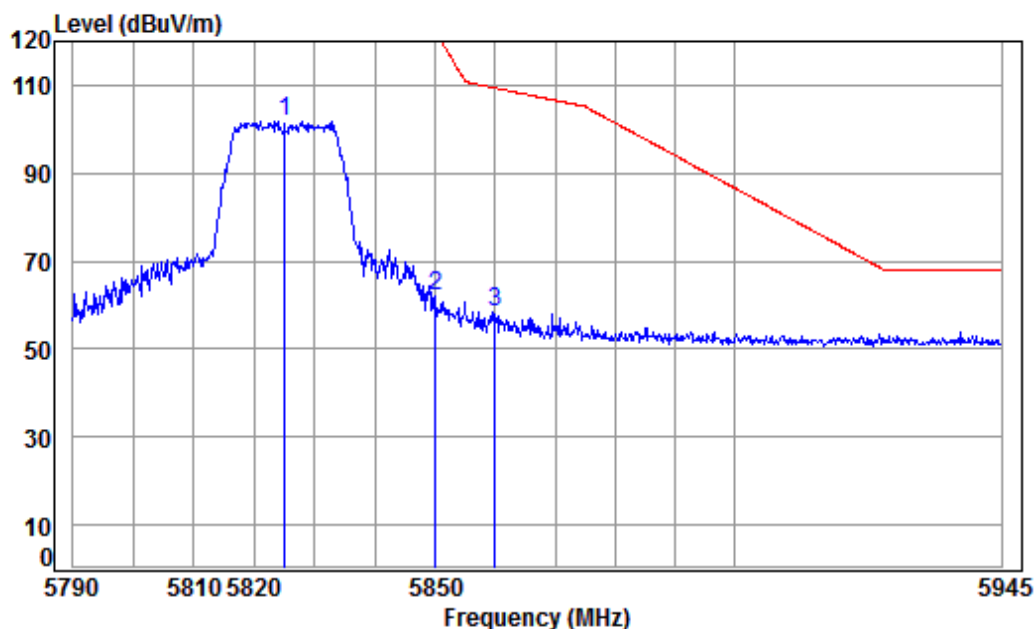

Condition: 3m HORIZONTAL

Job No : 0217RG

Mode : 5825 Band edge

: Ant 1 5G WIFI 11AC CH165

		Cable	Ant	Preamp	Read		Limit	Over	
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1 pp	5825.000	9.98	34.60	38.12	95.40	101.86	125.20	-23.34	peak
2	5850.000	10.07	34.61	38.11	55.58	62.15	122.20	-60.05	peak
3	5860.000	10.10	34.62	38.11	51.95	58.56	109.40	-50.84	peak




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM180200138802

Page: 457 of 817

Test mode:	802.11n(HT40)	Frequency(MHz):	5190	Peak	Vertical
------------	---------------	-----------------	------	------	----------

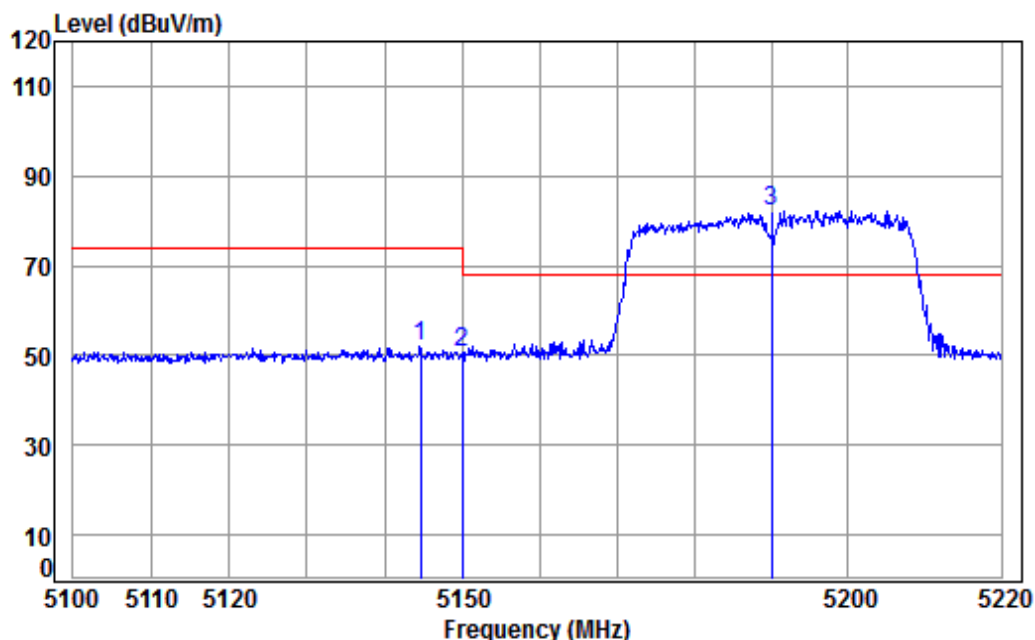

Condition: 3m VERTICAL

Job No : 0217RG

Mode : 5190 Band edge

: Ant 1 5G WIFI 11N(40) CH38

		Cable	Ant	Preamp	Read		Limit	Over	
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	5144.554	8.32	34.47	38.18	47.19	51.80	74.00	-22.20	Peak
2	5149.980	8.33	34.47	38.18	45.95	50.57	74.00	-23.43	Peak
3 pp	5190.000	8.39	34.46	38.18	77.65	82.32	68.20	14.12	Peak




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM180200138802

Page: 458 of 817

Test mode:	802.11n(HT40)	Frequency(MHz):	5190	Average	Vertical
------------	---------------	-----------------	------	---------	----------

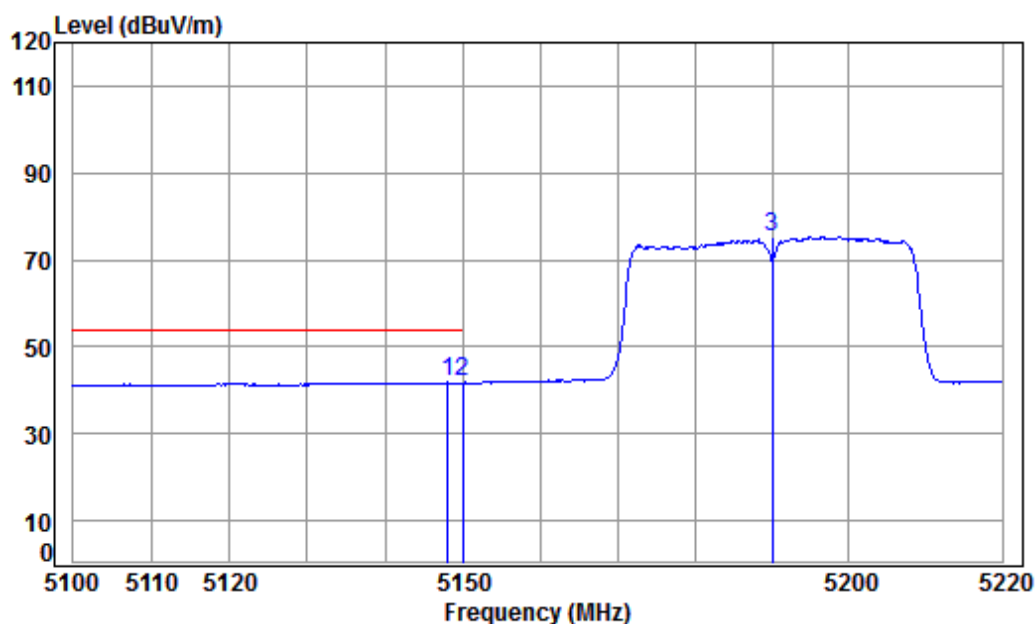

Condition: 3m VERTICAL

Job No : 0217RG

Mode : 5190 Band edge

: Ant 1 5G WIFI 11N(40) CH38

		Cable	Ant	Preamp	Read		Limit	Over	
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	5148.024	8.32	34.47	38.18	37.15	41.76	54.00	-12.24	Average
2	pp 5149.980	8.33	34.47	38.18	37.18	41.80	54.00	-12.20	Average
3	5190.000	8.39	34.46	38.18	70.62	75.29	-----	-----	Average




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM180200138802

Page: 459 of 817

Test mode:	802.11n(HT40)	Frequency(MHz):	5190	Peak	Horizontal
------------	---------------	-----------------	------	------	------------

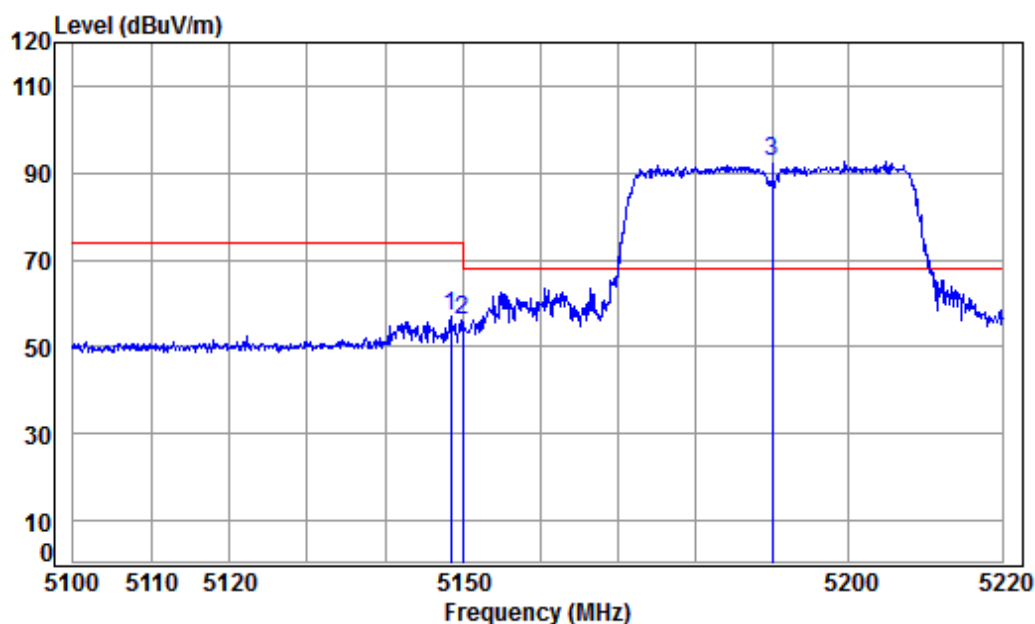

Condition: 3m HORIZONTAL

Job No : 0217RG

Mode : 5190 Band edge

: Ant 1 5G WIFI 11N(40) CH38

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	5148.503	8.32	34.47	38.18	52.32	56.93	74.00	-17.07	peak
2	5149.980	8.33	34.47	38.18	51.35	55.97	74.00	-18.03	peak
3 pp	5190.000	8.39	34.46	38.18	88.13	92.80	68.20	24.60	peak




SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch

Report No.: SZEM180200138802

Page: 460 of 817

Test mode:	802.11n(HT40)	Frequency(MHz):	5190	Average	Horizontal
------------	---------------	-----------------	------	---------	------------

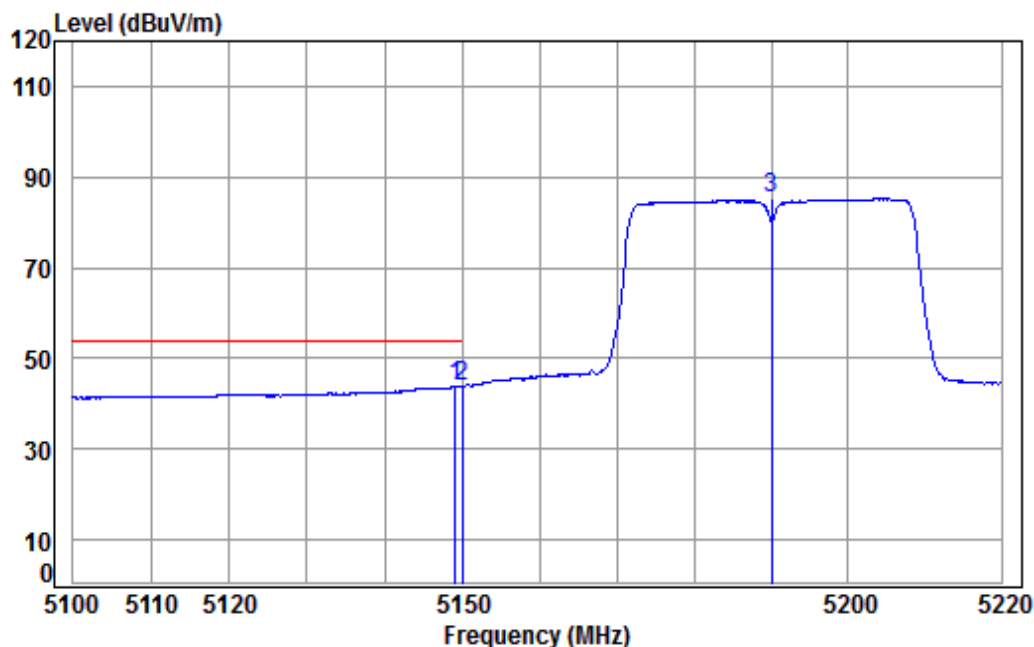

Condition: 3m HORIZONTAL

Job No : 0217RG

Mode : 5190 Band edge

: Ant 1 5G WIFI 11N(40) CH38

		Cable	Ant	Preamp	Read		Limit	Over	
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	pp 5149.102	8.32	34.47	38.18	39.33	43.94	54.00	-10.06	Average
2	5149.980	8.33	34.47	38.18	39.30	43.92	54.00	-10.08	Average
3	5190.000	8.39	34.46	38.18	80.56	85.23	-----	-----	Average




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM180200138802

Page: 461 of 817

Test mode:	802.11n(HT40)	Frequency(MHz):	5230	Peak	Vertical
------------	---------------	-----------------	------	------	----------

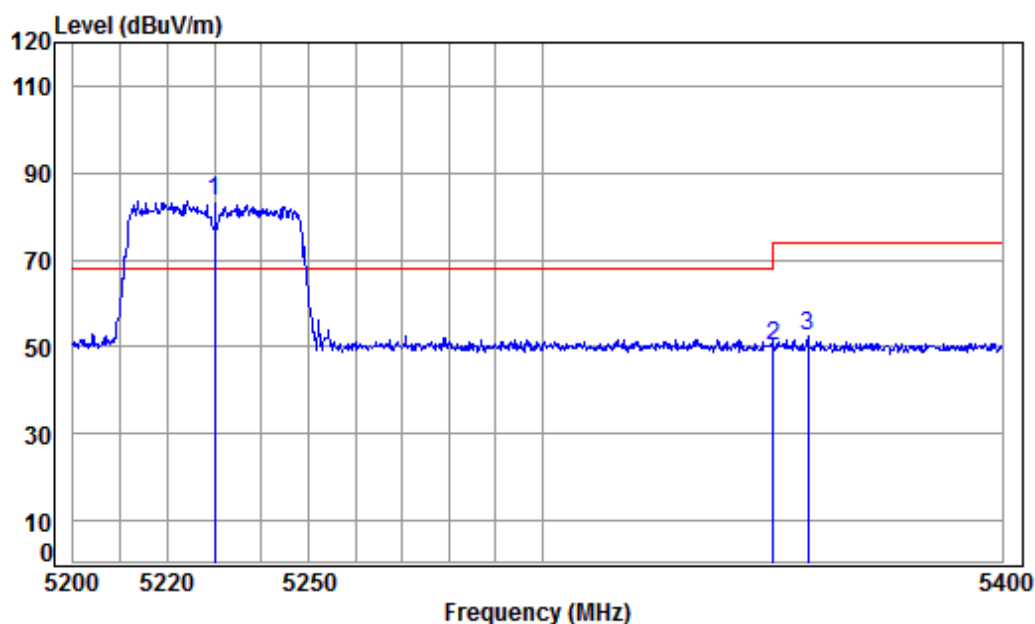

Condition: 3m VERTICAL

Job No : 0217RG

Mode : 5230 Band edge

: Ant 1 5G WIFI 11N(40) CH46

		Cable	Ant	Preamp	Read	Limit	Over	
	Freq	Loss	Factor	Factor	Level	Line	Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1 pp	5230.000	8.45	34.45	38.18	78.65	83.37	68.20	15.17 Peak
2	5350.020	8.63	34.43	38.16	45.10	50.00	74.00	-24.00 Peak
3	5357.574	8.64	34.43	38.16	47.35	52.26	74.00	-21.74 Peak




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM180200138802

Page: 462 of 817

Test mode:	802.11n(HT40)	Frequency(MHz):	5230	Average	Vertical
------------	---------------	-----------------	------	---------	----------

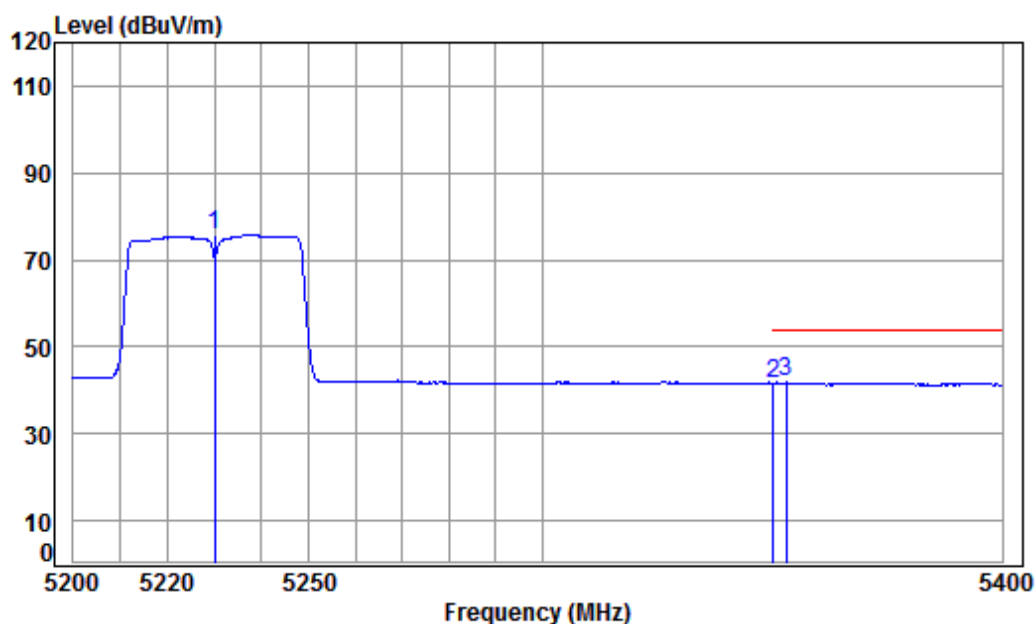

Condition: 3m VERTICAL

Job No : 0217RG

Mode : 5230 Band edge

: Ant 1 5G WIFI 11N(40) CH46

	Freq	Cable Loss	Ant Factor	Preamplifier Factor	Read Level	Limit Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	5230.000	8.45	34.45	38.18	70.99	75.71	-----	-----	Average
2	5350.020	8.63	34.43	38.16	36.81	41.71	54.00	-12.29	Average
3 pp	5352.723	8.63	34.43	38.16	36.85	41.75	54.00	-12.25	Average




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM180200138802

Page: 463 of 817

Test mode:	802.11n(HT40)	Frequency(MHz):	5230	Peak	Horizontal
------------	---------------	-----------------	------	------	------------

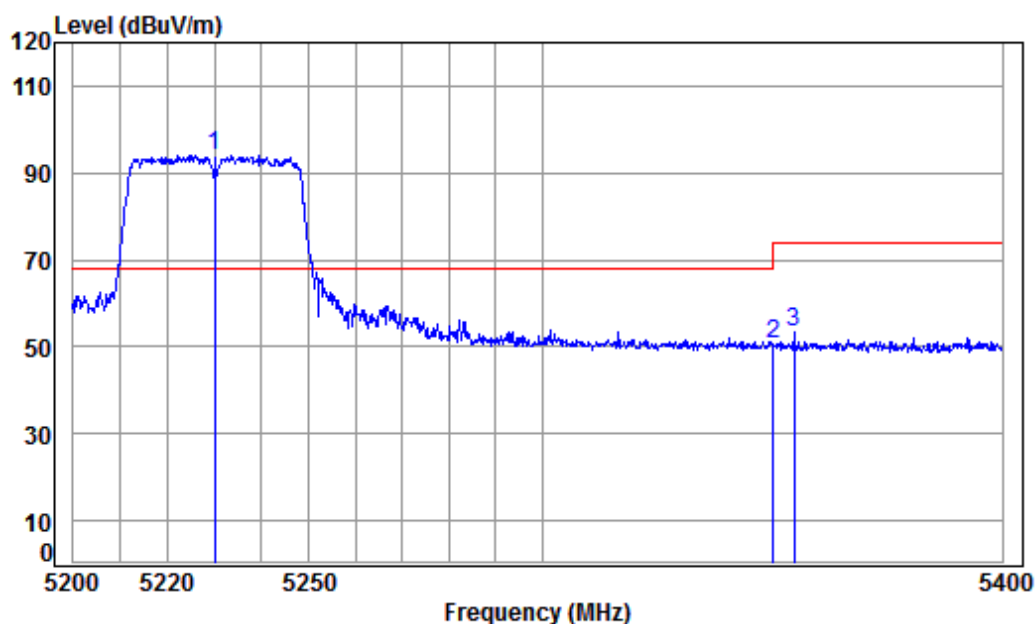

Condition: 3m HORIZONTAL

Job No : 0217RG

Mode : 5230 Band edge

: Ant 1 5G WIFI 11N(40) CH46

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1 pp	5230.000	8.45	34.45	38.18	89.25	93.97	68.20	25.77 peak
2	5350.020	8.63	34.43	38.16	45.59	50.49	74.00	-23.51 peak
3	5354.542	8.64	34.43	38.16	48.52	53.43	74.00	-20.57 peak




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM180200138802

Page: 464 of 817

Test mode:	802.11n(HT40)	Frequency(MHz):	5230	Average	Horizontal
------------	---------------	-----------------	------	---------	------------

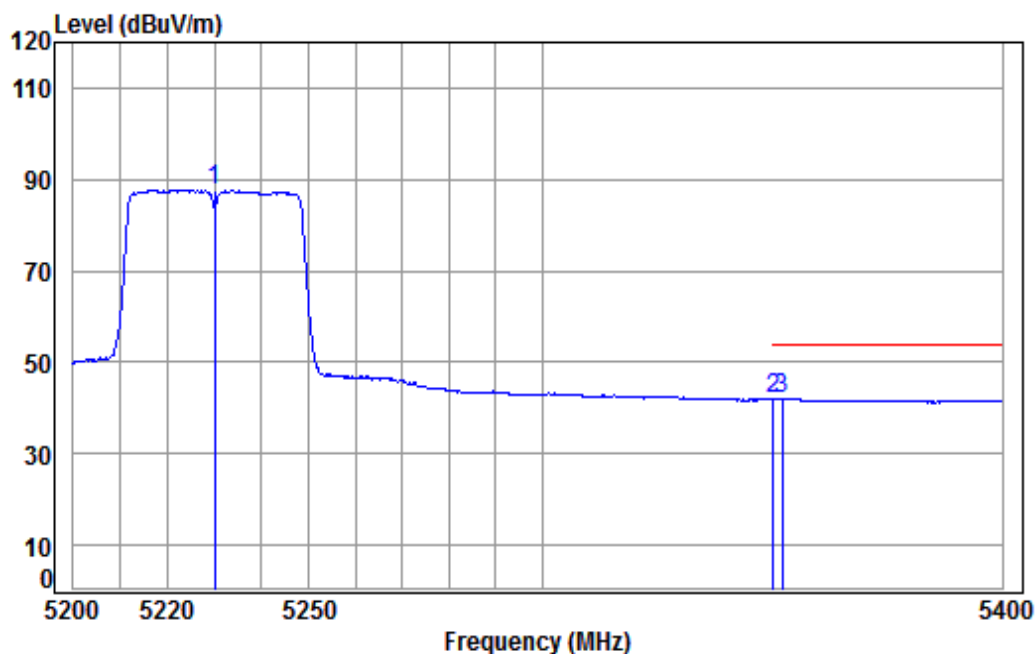

Condition: 3m HORIZONTAL

Job No : 0217RG

Mode : 5230 Band edge

: Ant 1 5G WIFI 11N(40) CH46

		Cable	Ant	Preamp	Read	Limit	Over	
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1	5230.000	8.45	34.45	38.18	82.86	87.58	-----	----- Average
2	5350.020	8.63	34.43	38.16	37.14	42.04	54.00	-11.96 Average
3 pp	5351.916	8.63	34.43	38.16	37.14	42.04	54.00	-11.96 Average




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM180200138802

Page: 465 of 817

Test mode:	802.11n(HT40)	Frequency(MHz):	5270	Peak	Vertical
------------	---------------	-----------------	------	------	----------

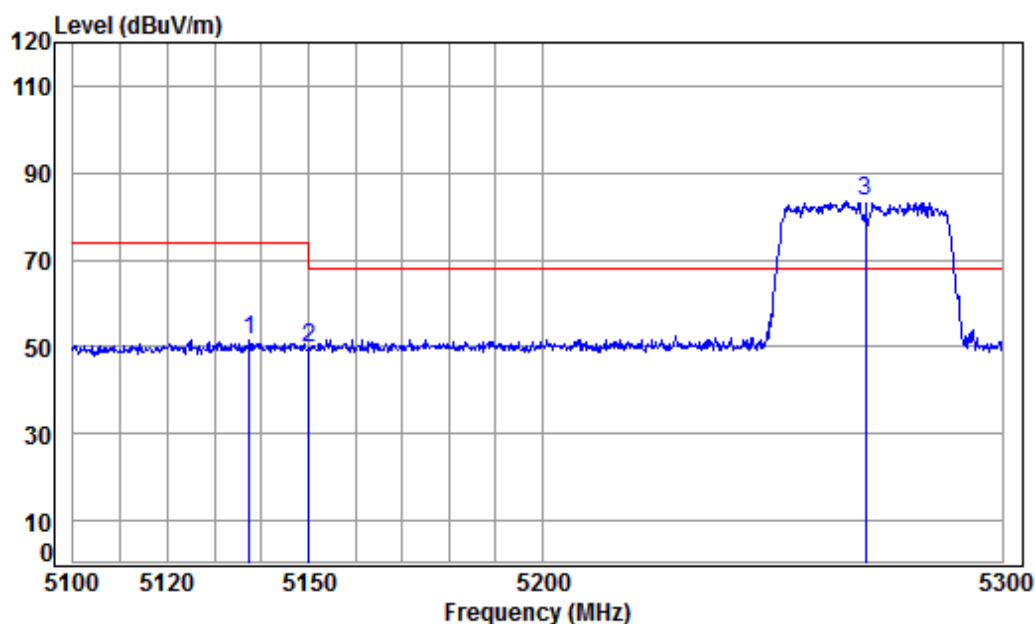

Condition: 3m VERTICAL

Job No : 0217RG

Mode : 5270 Band edge

: Ant 1 5G WIFI 11N(40) CH54

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	5137.410	8.31	34.47	38.19	47.10	51.69	74.00	-22.31	Peak
2	5149.980	8.33	34.47	38.18	44.95	49.57	74.00	-24.43	Peak
3 pp	5270.000	8.51	34.44	38.17	78.85	83.63	68.20	15.43	Peak




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM180200138802

Page: 466 of 817

Test mode:	802.11n(HT40)	Frequency(MHz):	5270	Average	Vertical
------------	---------------	-----------------	------	---------	----------

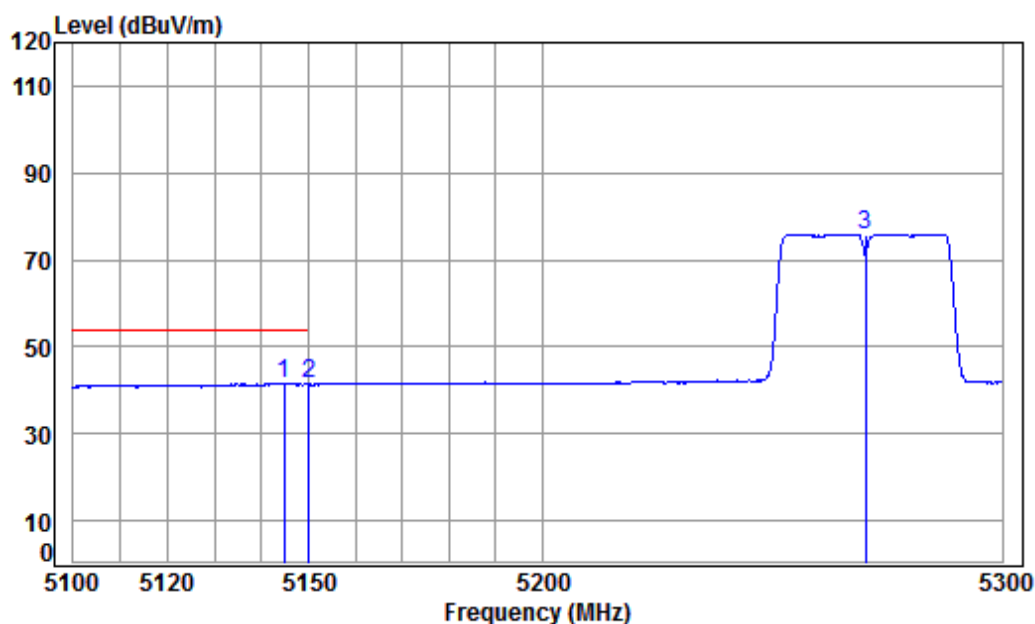

Condition: 3m VERTICAL

Job No : 0217RG

Mode : 5270 Band edge

: Ant 1 5G WIFI 11N(40) CH54

		Cable	Ant	Preamp	Read	Limit	Over	
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1 pp	5144.728	8.32	34.47	38.18	36.84	41.45	54.00	-12.55 Average
2	5149.980	8.33	34.47	38.18	36.69	41.31	54.00	-12.69 Average
3	5270.000	8.51	34.44	38.17	71.14	75.92	-----	----- Average




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM180200138802

Page: 467 of 817

Test mode:	802.11n(HT40)	Frequency(MHz):	5270	Peak	Horizontal
------------	---------------	-----------------	------	------	------------

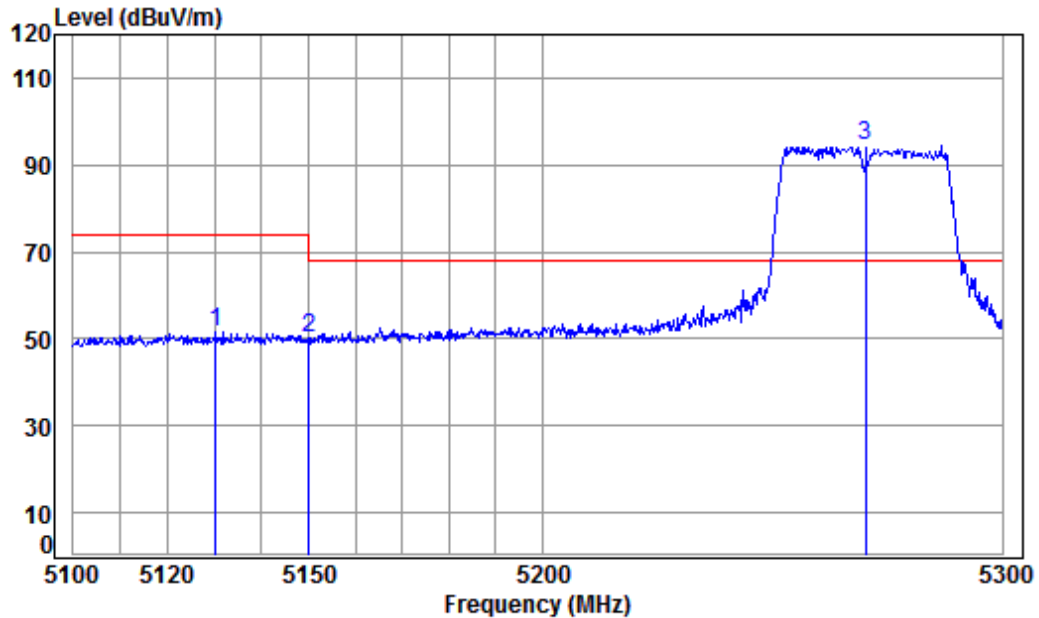

Condition: 3m HORIZONTAL

Job No : 0217RG

Mode : 5270 Band edge

: Ant 1 5G WIFI 11N(40) CH54

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Limit Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	5130.301	8.30	34.47	38.19	47.15	51.73	74.00	-22.27	peak
2	5149.980	8.33	34.47	38.18	45.46	50.08	74.00	-23.92	peak
3 pp	5270.000	8.51	34.44	38.17	89.69	94.47	68.20	26.27	peak




SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch

Report No.: SZEM180200138802

Page: 468 of 817

Test mode:	802.11n(HT40)	Frequency(MHz):	5270	Average	Horizontal
------------	---------------	-----------------	------	---------	------------

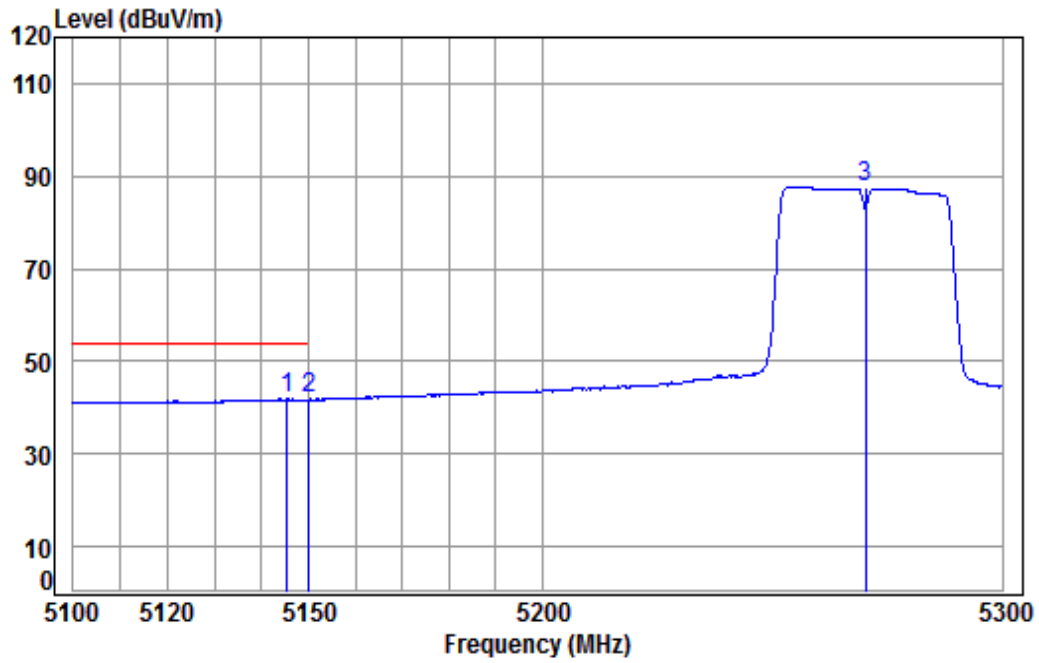

Condition: 3m HORIZONTAL

Job No : 0217RG

Mode : 5270 Band edge

: Ant 1 5G WIFI 11N(40) CH54

		Cable	Ant	Preamp	Read	Limit	Over	
	Freq	Loss	Factor	Factor	Level	Line	Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1 pp	5145.321	8.32	34.47	38.18	37.23	41.84	54.00	-12.16 Average
2	5149.980	8.33	34.47	38.18	37.15	41.77	54.00	-12.23 Average
3	5270.000	8.51	34.44	38.17	83.03	87.81	-----	----- Average




SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch

Report No.: SZEM180200138802

Page: 469 of 817

Test mode:	802.11n(HT40)	Frequency(MHz):	5310	Peak	Vertical
------------	---------------	-----------------	------	------	----------

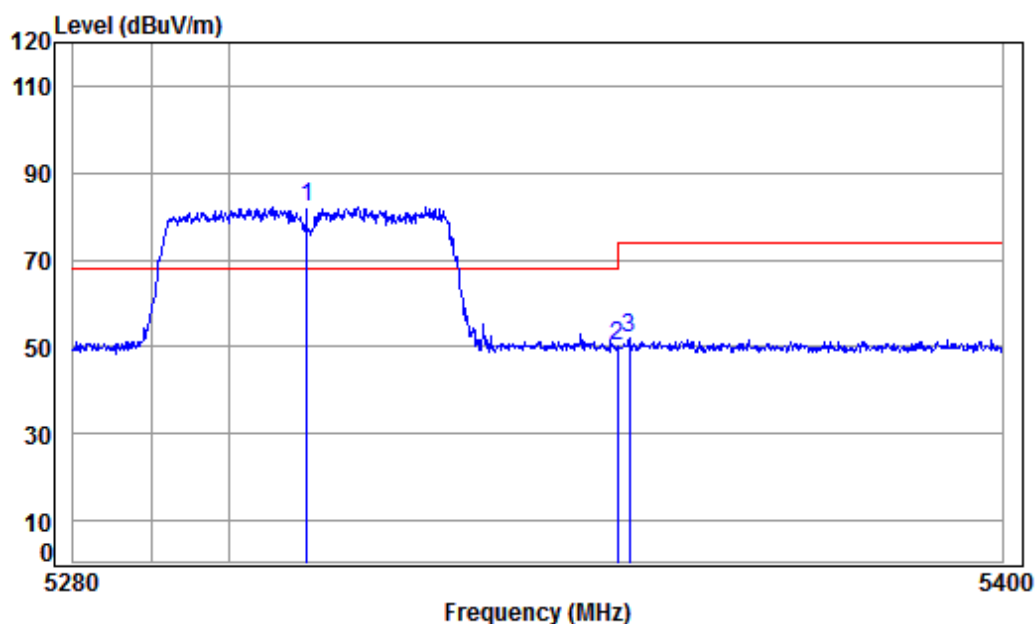

Condition: 3m VERTICAL

Job No : 0217RG

Mode : 5310 Band edge

: Ant 1 5G WIFI 11N(40) CH62

		Cable	Ant	Preamp	Read	Limit	Over	
Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1 pp 5310.000	8.57	34.44	38.17	77.27	82.11	68.20	13.91	Peak
2 5350.020	8.63	34.43	38.16	45.35	50.25	74.00	-23.75	Peak
3 5351.556	8.63	34.43	38.16	47.25	52.15	74.00	-21.85	Peak




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM180200138802

Page: 470 of 817

Test mode:	802.11n(HT40)	Frequency(MHz):	5310	Average	Vertical
------------	---------------	-----------------	------	---------	----------

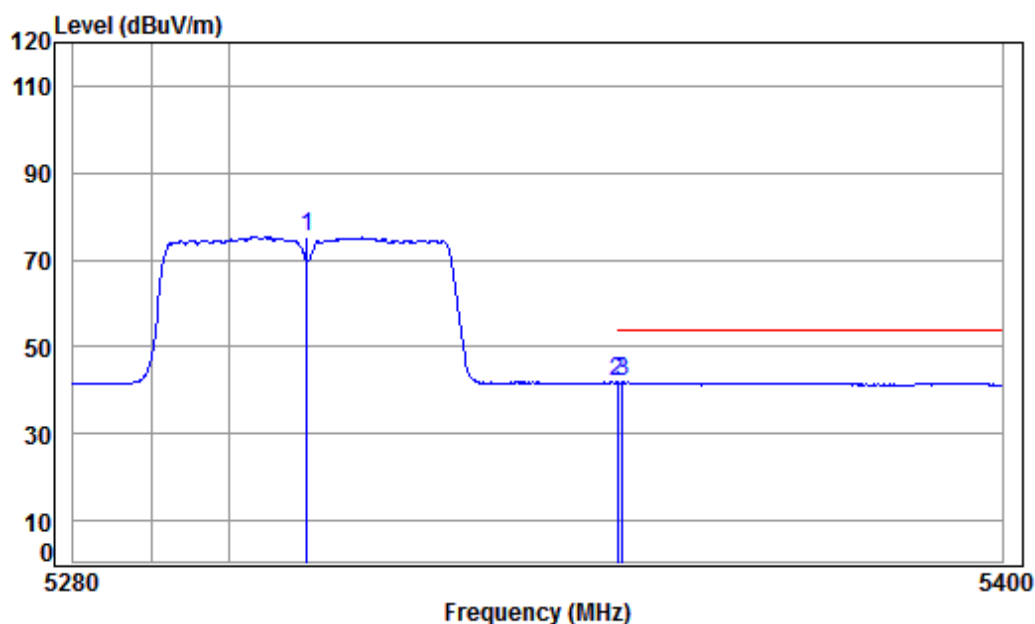

Condition: 3m VERTICAL

Job No : 0217RG

Mode : 5310 Band edge

: Ant 1 5G WIFI 11N(40) CH62

		Cable	Ant	Preamp	Read		Limit	Over	
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	5310.000	8.57	34.44	38.17	70.41	75.25	-----	-----	Average
2	pp 5350.020	8.63	34.43	38.16	37.03	41.93	54.00	-12.07	Average
3	5350.594	8.63	34.43	38.16	36.92	41.82	54.00	-12.18	Average




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM180200138802

Page: 471 of 817

Test mode:	802.11n(HT40)	Frequency(MHz):	5310	Peak	Horizontal
------------	---------------	-----------------	------	------	------------

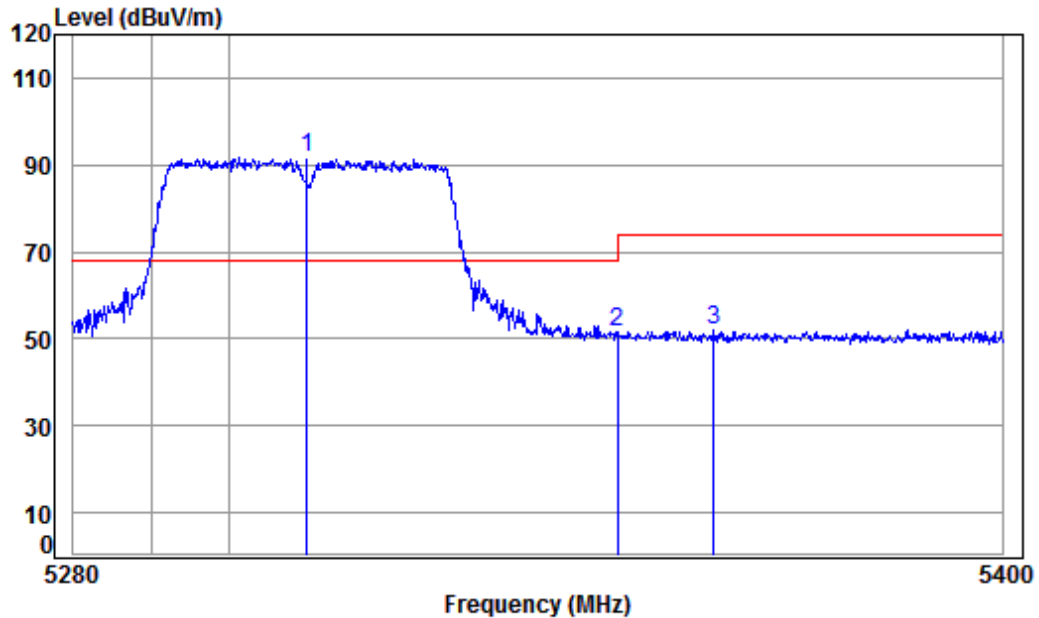

Condition: 3m HORIZONTAL

Job No : 0217RG

Mode : 5310 Band edge

: Ant 1 5G WIFI 11N(40) CH62

		Cable	Ant	Preamp	Read	Limit	Over	
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1 pp	5310.000	8.57	34.44	38.17	86.71	91.55	68.20	23.35 peak
2	5350.020	8.63	34.43	38.16	46.88	51.78	74.00	-22.22 peak
3	5362.511	8.65	34.43	38.16	47.17	52.09	74.00	-21.91 peak




SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch

Report No.: SZEM180200138802

Page: 472 of 817

Test mode:	802.11n(HT40)	Frequency(MHz):	5310	Average	Horizontal
------------	---------------	-----------------	------	---------	------------

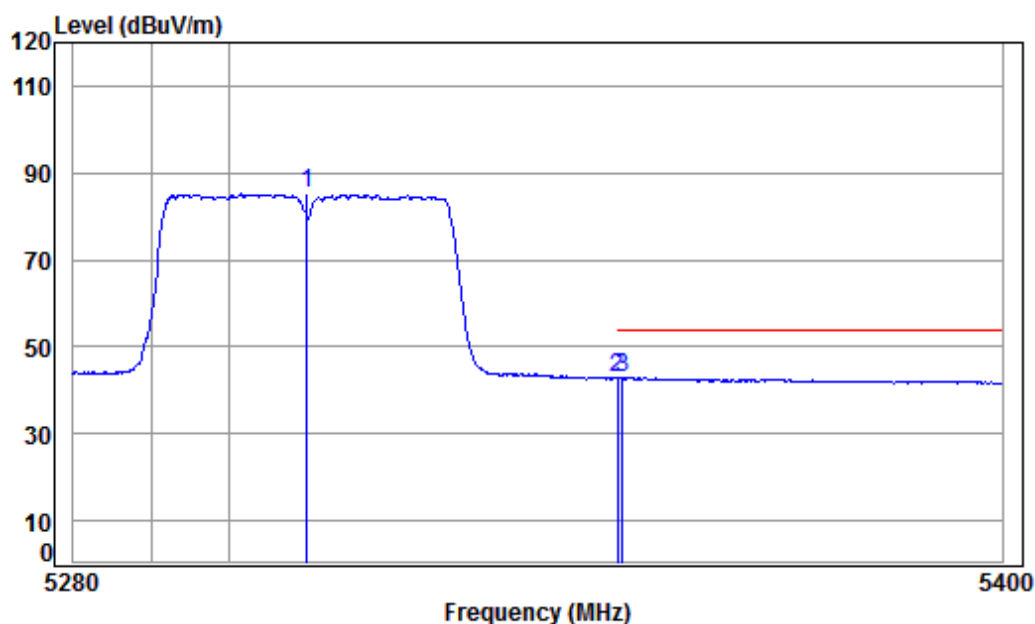

Condition: 3m HORIZONTAL

Job No : 0217RG

Mode : 5310 Band edge

: Ant 1 5G WIFI 11N(40) CH62

		Cable	Ant	Preamp	Read		Limit	Over	
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	5310.000	8.57	34.44	38.17	80.35	85.19	-----	-----	Average
2	pp 5350.020	8.63	34.43	38.16	38.00	42.90	54.00	-11.10	Average
3	5350.594	8.63	34.43	38.16	37.92	42.82	54.00	-11.18	Average




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM180200138802

Page: 473 of 817

Test mode:	802.11n(HT40)	Frequency(MHz):	5510	Peak	Vertical
------------	---------------	-----------------	------	------	----------

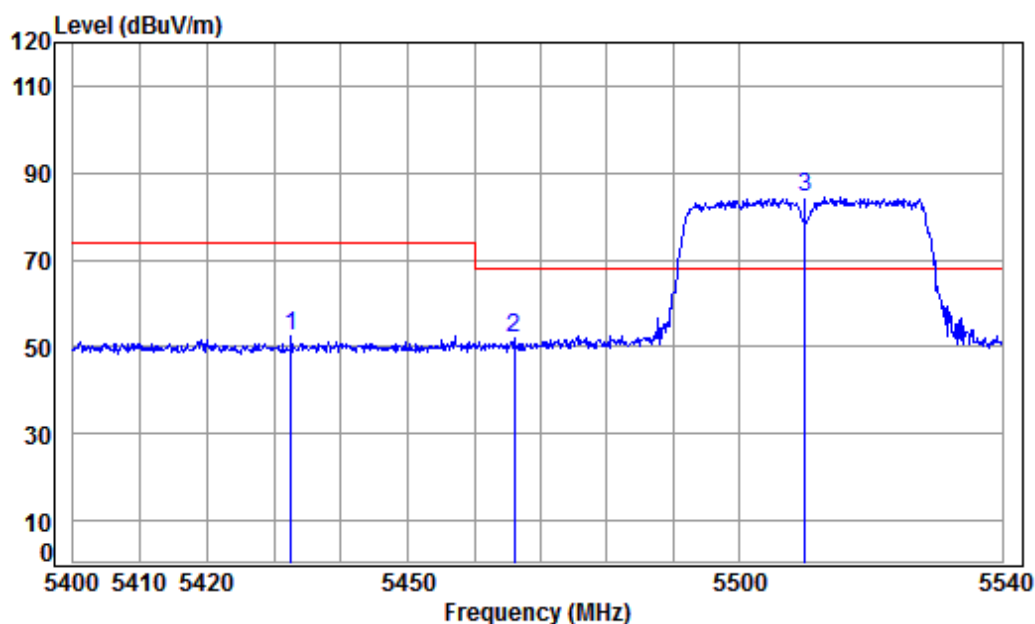

Condition: 3m VERTICAL

Job No : 0217RG

Mode : 5510 Band edge

: Ant 1 5G WIFI 11N(40) CH102

		Cable	Ant	Preamp	Read		Limit	Over	
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	5432.579	8.75	34.41	38.15	47.33	52.34	74.00	-21.66	Peak
2	5466.053	8.80	34.41	38.15	47.01	52.07	68.20	-16.13	peak
3 pp	5510.000	8.89	34.41	38.15	79.34	84.49	68.20	16.29	Peak




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM180200138802

Page: 474 of 817

Test mode:	802.11n(HT40)	Frequency(MHz):	5510	Average	Vertical
------------	---------------	-----------------	------	---------	----------

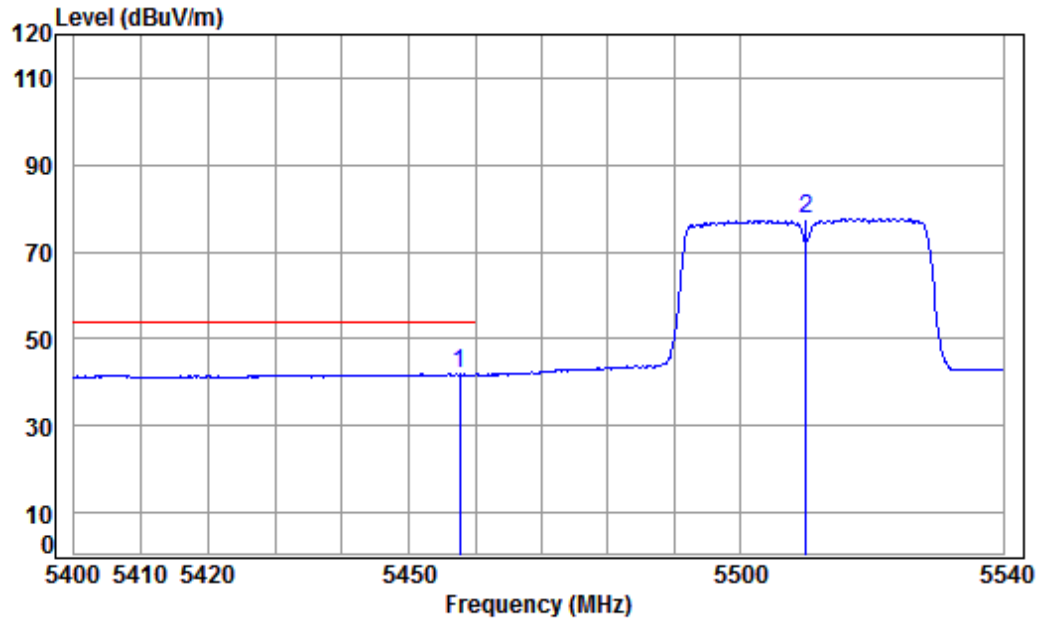

Condition: 3m VERTICAL

Job No : 0217RG

Mode : 5510 Band edge

: Ant 1 5G WIFI 11N(40) CH102

		Cable	Ant	Preamp	Read	Limit	Over	
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1 pp	5457.666	8.79	34.41	38.15	36.80	41.85	54.00	-12.15 Average
2	5510.000	8.89	34.41	38.15	72.48	77.63	-----	----- Average




SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch

Report No.: SZEM180200138802

Page: 475 of 817

Test mode:	802.11n(HT40)	Frequency(MHz):	5510	Peak	Horizontal
------------	---------------	-----------------	------	------	------------

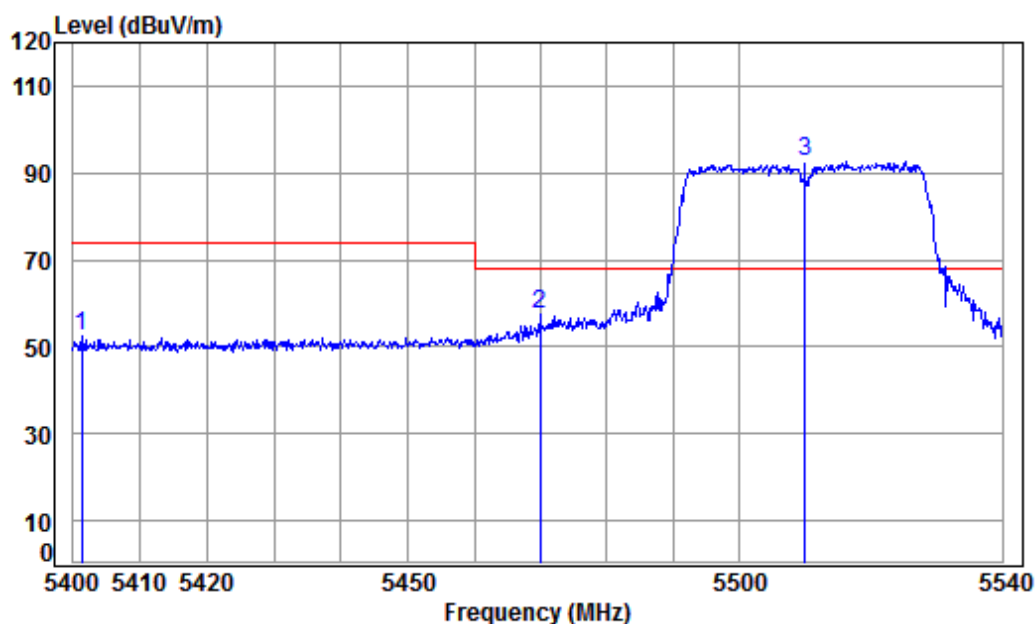

Condition: 3m HORIZONTAL

Job No : 0217RG

Mode : 5510 Band edge

: Ant 1 5G WIFI 11N(40) CH102

		Cable	Ant	Preamp	Read		Limit	Over	
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	5401.244	8.71	34.42	38.16	47.30	52.27	74.00	-21.73	peak
2	5469.972	8.81	34.41	38.15	52.65	57.72	68.20	-10.48	peak
3 pp	5510.000	8.89	34.41	38.15	87.46	92.61	68.20	24.41	peak




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM180200138802

Page: 476 of 817

Test mode:	802.11n(HT40)	Frequency(MHz):	5510	Average	Horizontal
------------	---------------	-----------------	------	---------	------------

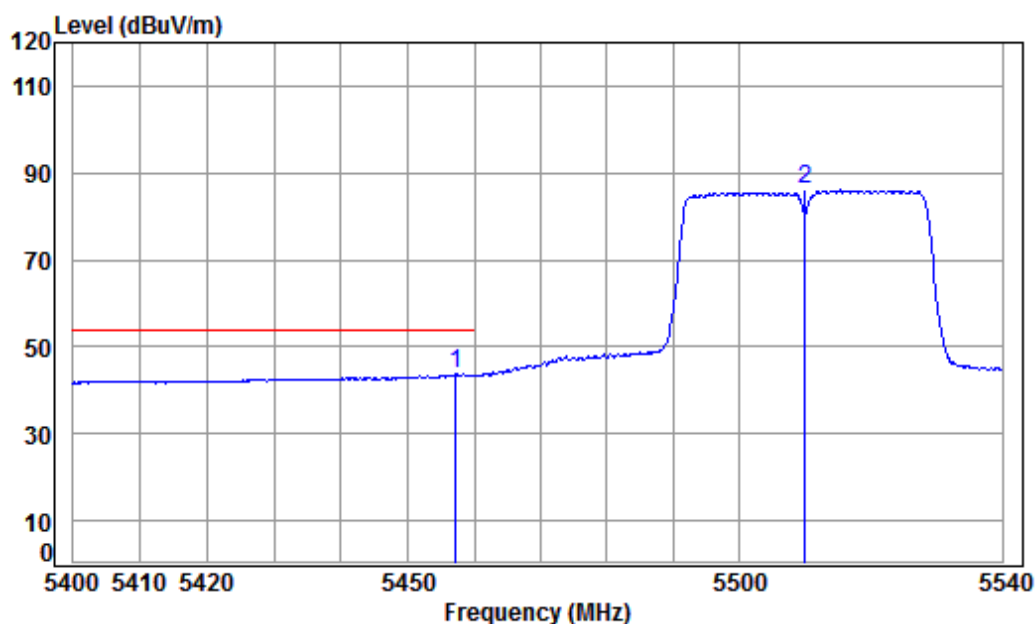

Condition: 3m HORIZONTAL

Job No : 0217RG

Mode : 5510 Band edge

: Ant 1 5G WIFI 11N(40) CH102

		Cable	Ant	Preamp	Read	Limit	Over	
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1 pp	5457.246	8.79	34.41	38.15	38.58	43.63	54.00	-10.37 Average
2	5510.000	8.89	34.41	38.15	80.87	86.02	-----	----- Average




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM180200138802

Page: 477 of 817

Test mode:	802.11n(HT40)	Frequency(MHz):	5670	Peak	Vertical
------------	---------------	-----------------	------	------	----------

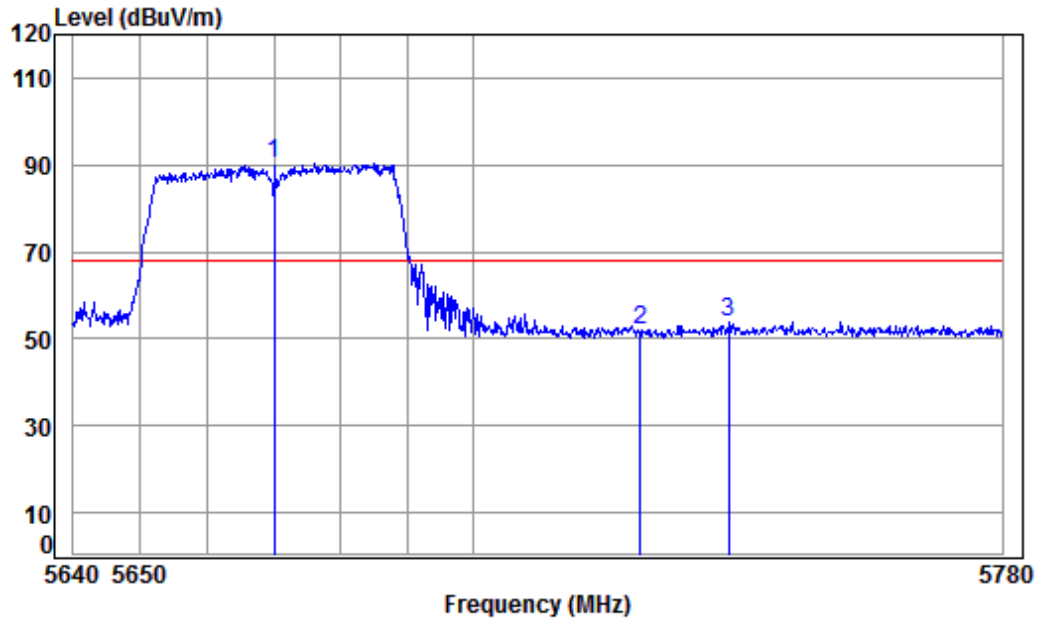

Condition: 3m VERTICAL

Job No : 0217RG

Mode : 5670 Band edge

: Ant 1 5G WIFI 11N(40) CH134

		Cable	Ant	Preamp	Read	Limit	Over	
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1	pp 5670.000	9.45	34.50	38.13	84.37	90.19	68.20	21.99 Peak
2	5725.000	9.64	34.54	38.13	46.10	52.15	68.20	-16.05 Peak
3	5738.483	9.69	34.55	38.12	47.85	53.97	68.20	-14.23 Peak




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM180200138802

Page: 478 of 817

Test mode:	802.11n(HT40)	Frequency(MHz):	5670	Peak	Horizontal
------------	---------------	-----------------	------	------	------------

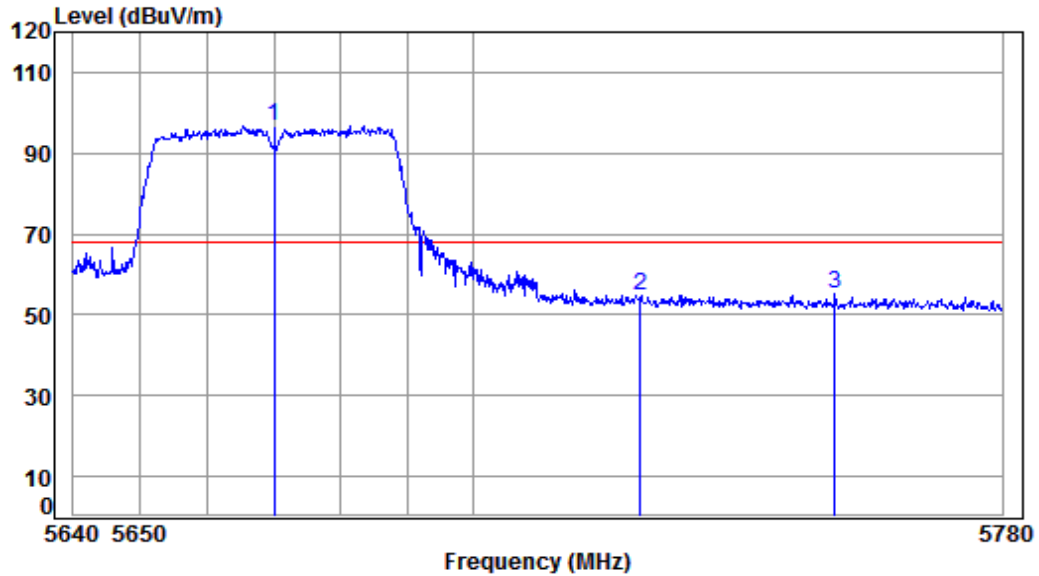

Condition: 3m HORIZONTAL

Job No : 0217RG

Mode : 5670 Band edge

: Ant 1 5G WIFI 11N(40) CH134

		Cable	Ant	Preamp	Read	Limit	Over	
	Freq	Loss	Factor	Factor	Level	Line	Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1 pp	5670.000	9.45	34.50	38.13	91.06	96.88	68.20	28.68 peak
2	5725.000	9.64	34.54	38.13	48.81	54.86	68.20	-13.34 peak
3	5754.546	9.74	34.56	38.12	48.81	54.99	68.20	-13.21 peak




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM180200138802

Page: 479 of 817

Test mode:	802.11n(HT40)	Frequency(MHz):	5755	Peak	Vertical
------------	---------------	-----------------	------	------	----------

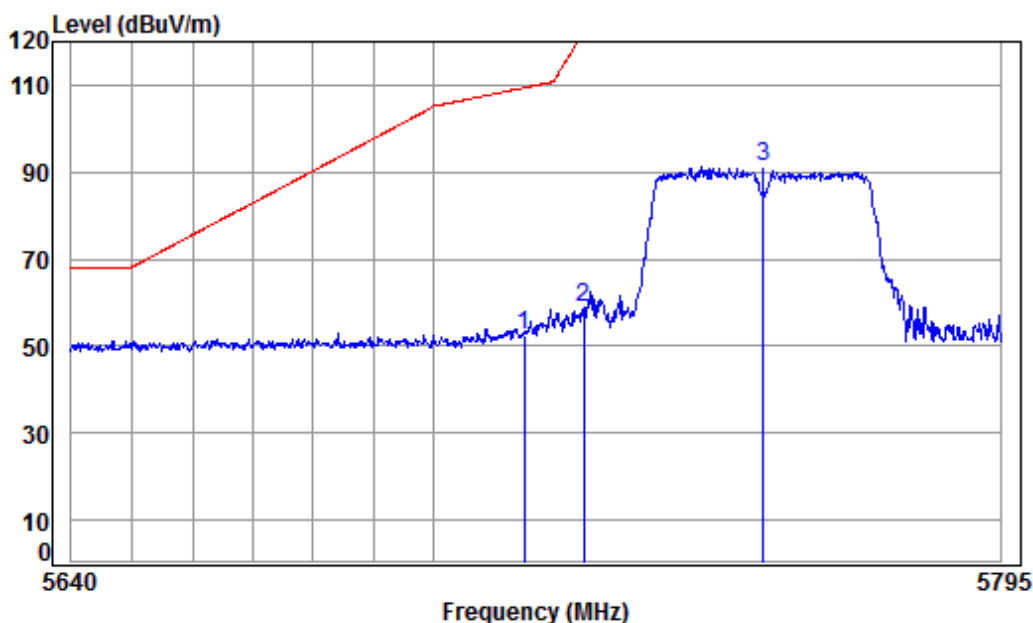

Condition: 3m VERTICAL

Job No : 0217RG

Mode : 5755 Band edge

: Ant 1 5G WIFI 11N(40) CH151

		Cable	Ant	Preamp	Read	Limit	Over	
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1	5715.000	9.61	34.53	38.13	46.35	52.36	109.40	-57.04 peak
2	5725.000	9.64	34.54	38.13	52.60	58.65	122.20	-63.55 peak
3 pp	5755.000	9.75	34.56	38.12	84.85	91.04	125.20	-34.16 peak




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM180200138802

Page: 480 of 817

Test mode:	802.11n(HT40)	Frequency(MHz):	5755	Peak	Horizontal
------------	---------------	-----------------	------	------	------------

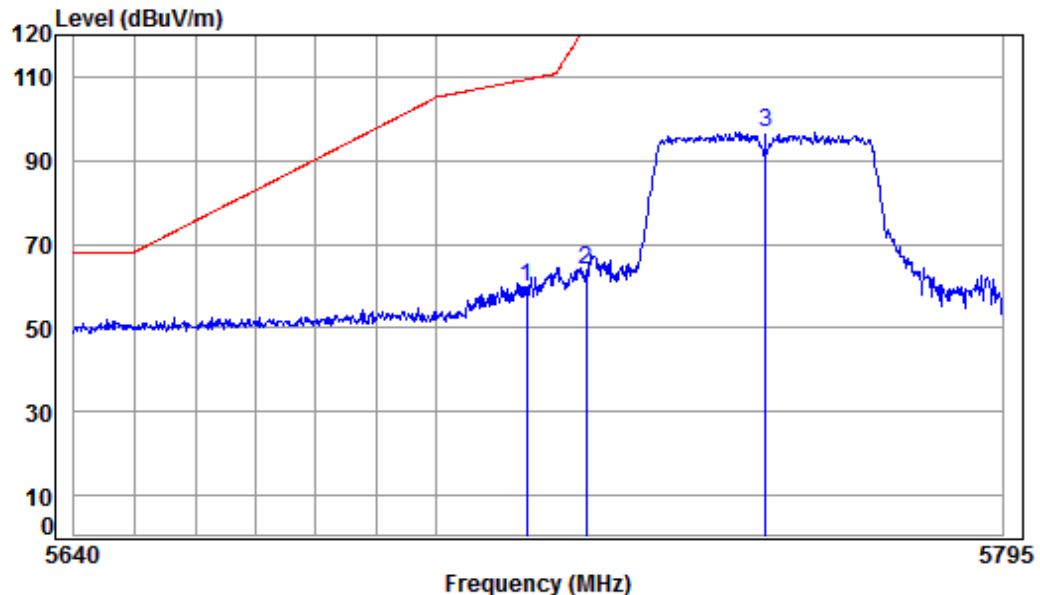

Condition: 3m HORIZONTAL

Job No : 0217RG

Mode : 5755 Band edge

: Ant 1 5G WIFI 11N(40) CH151

		Cable	Ant	Preamp	Read	Limit	Over	
	Freq	Loss	Factor	Factor	Level	Line	Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1	5715.000	9.61	34.53	38.13	53.58	59.59	109.40	-49.81 peak
2	5725.000	9.64	34.54	38.13	57.82	63.87	122.20	-58.33 peak
3 pp	5755.000	9.75	34.56	38.12	90.69	96.88	125.20	-28.32 peak




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM180200138802

Page: 481 of 817

Test mode:	802.11n(HT40)	Frequency(MHz):	5795	Peak	Vertical
------------	---------------	-----------------	------	------	----------

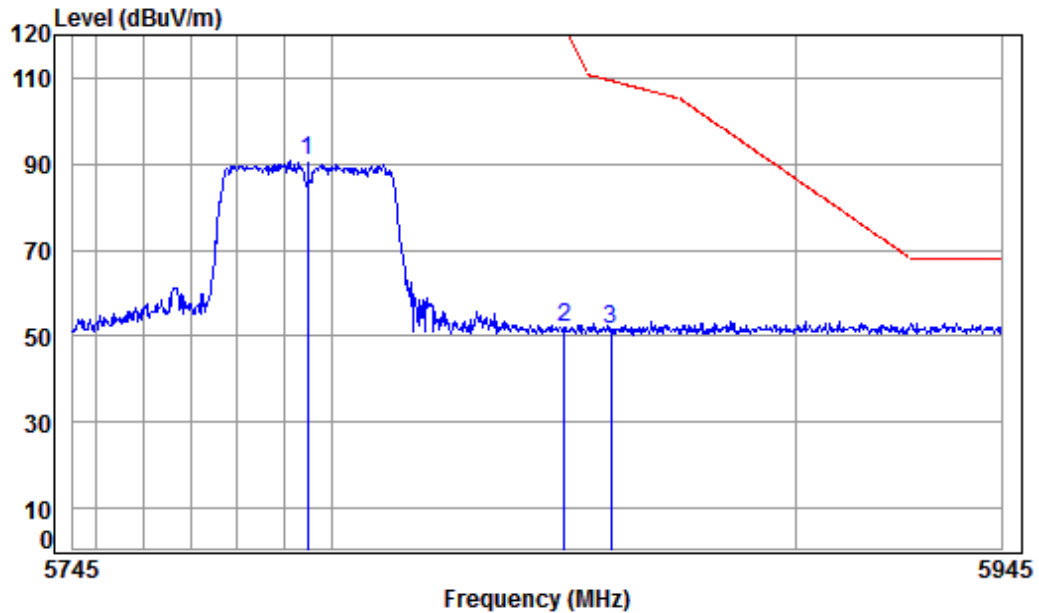

Condition: 3m VERTICAL

Job No : 0217RG

Mode : 5795 Band edge

: Ant 1 5G WIFI 11N(40) CH159

		Cable	Ant	Preamp	Read	Limit	Over	
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1 pp	5795.000	9.88	34.58	38.12	84.36	90.70	125.20	-34.50 peak
2	5850.000	10.07	34.61	38.11	45.67	52.24	122.20	-69.96 peak
3	5860.000	10.10	34.62	38.11	45.01	51.62	109.40	-57.78 peak




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM180200138802

Page: 482 of 817

Test mode:	802.11n(HT40)	Frequency(MHz):	5795	Peak	Horizontal
------------	---------------	-----------------	------	------	------------

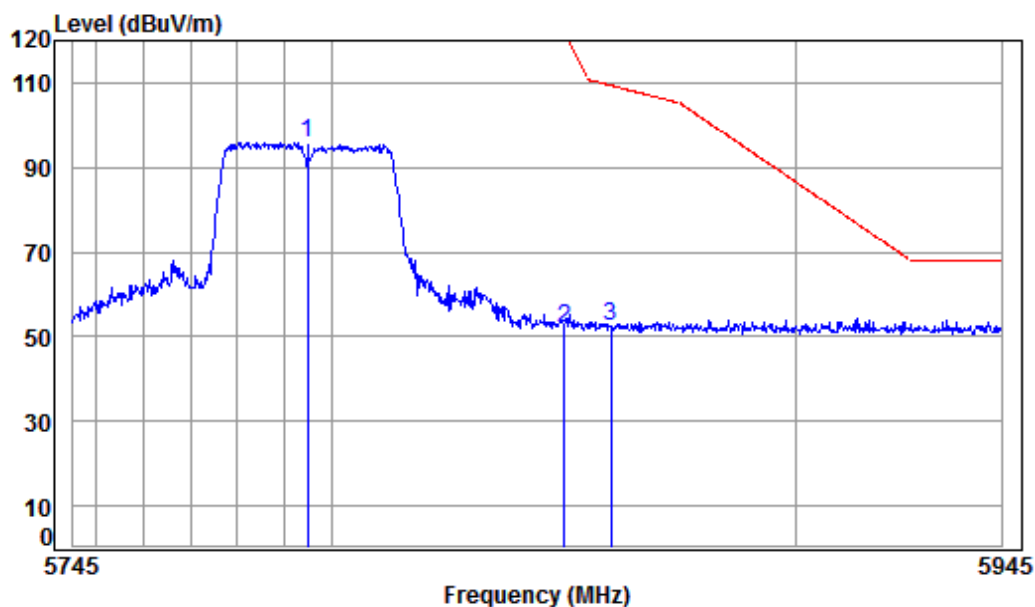

Condition: 3m HORIZONTAL

Job No : 0217RG

Mode : 5795 Band edge

: Ant 1 5G WIFI 11N(40) CH159

		Cable	Ant	Preamp	Read	Limit	Over	
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1	pp 5795.000	9.88	34.58	38.12	89.70	96.04	125.20	-29.16 peak
2	5850.000	10.07	34.61	38.11	45.30	51.87	122.20	-70.33 peak
3	5860.000	10.10	34.62	38.11	46.00	52.61	109.40	-56.79 peak




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM180200138802

Page: 483 of 817

Test mode:	802.11ac(HT40)	Frequency(MHz):	5190	Peak	Vertical
------------	----------------	-----------------	------	------	----------

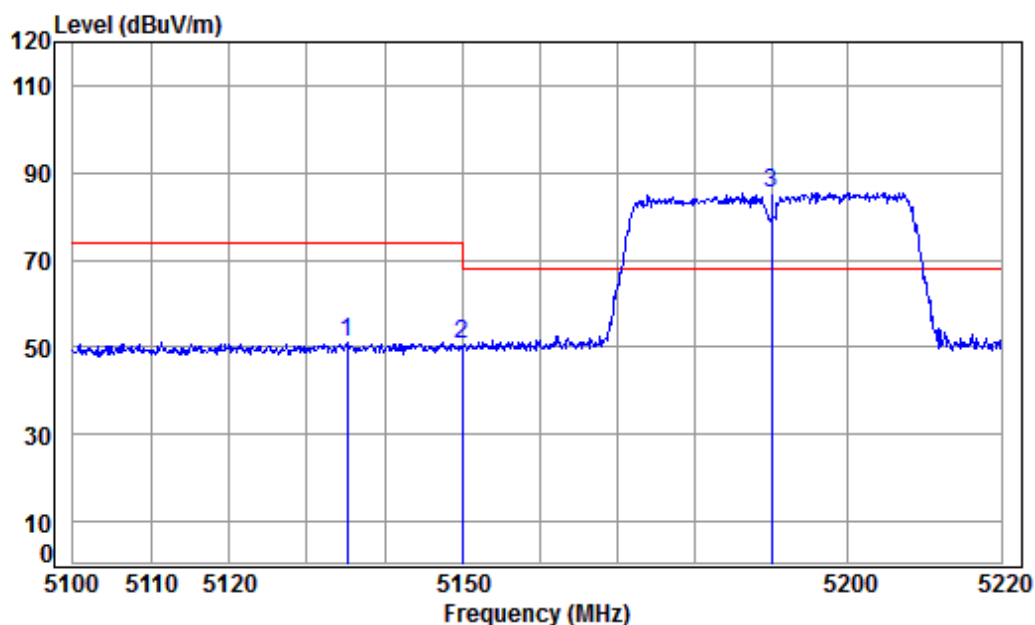

Condition: 3m VERTICAL

Job No : 0217RG

Mode : 5190 Band edge

: Ant 2 5G WIFI 11AC(40) CH38

		Cable	Ant	Preamp	Read		Limit	Over	
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	5135.229	8.30	34.47	38.19	46.58	51.16	74.00	-22.84	Peak
2	5149.980	8.33	34.47	38.18	46.15	50.77	74.00	-23.23	Peak
3 pp	5190.000	8.39	34.46	38.18	80.86	85.53	68.20	17.33	Peak




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM180200138802

Page: 484 of 817

Test mode:	802.11ac(HT40)	Frequency(MHz):	5190	Average	Vertical
------------	----------------	-----------------	------	---------	----------

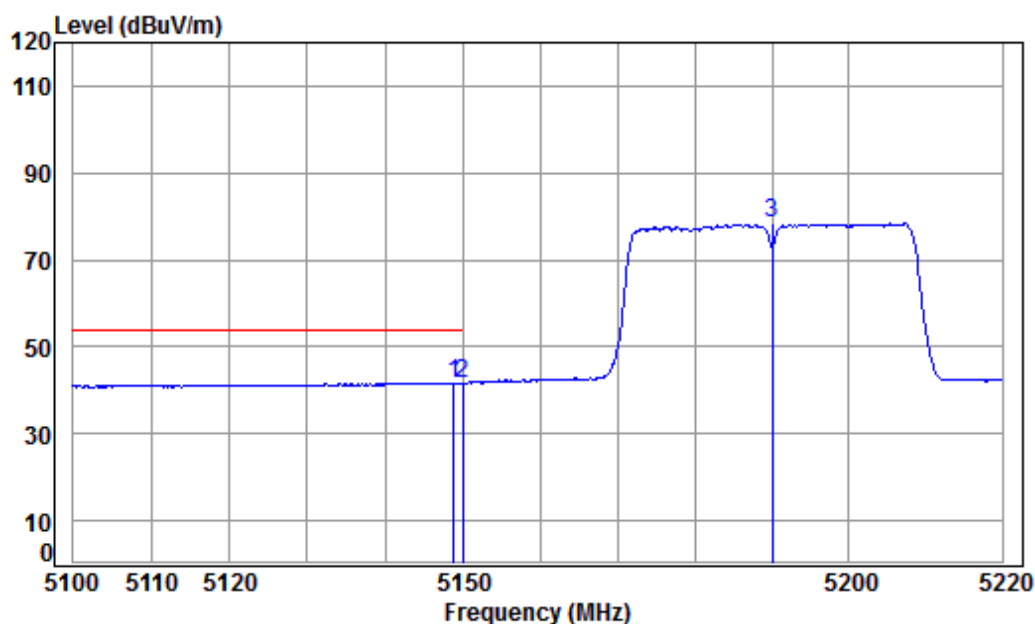

Condition: 3m VERTICAL

Job No : 0217RG

Mode : 5190 Band edge

: Ant 2 5G WIFI 11AC(40) CH38

		Cable	Ant	Preamp	Read	Limit	Over	
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1	5148.863	8.32	34.47	38.18	37.13	41.74	54.00	-12.26 Average
2 pp	5149.980	8.33	34.47	38.18	37.12	41.74	54.00	-12.26 Average
3	5190.000	8.39	34.46	38.18	73.67	78.34	-----	----- Average




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM180200138802

Page: 485 of 817

Test mode:	802.11ac(HT40)	Frequency(MHz):	5190	Peak	Horizontal
------------	----------------	-----------------	------	------	------------

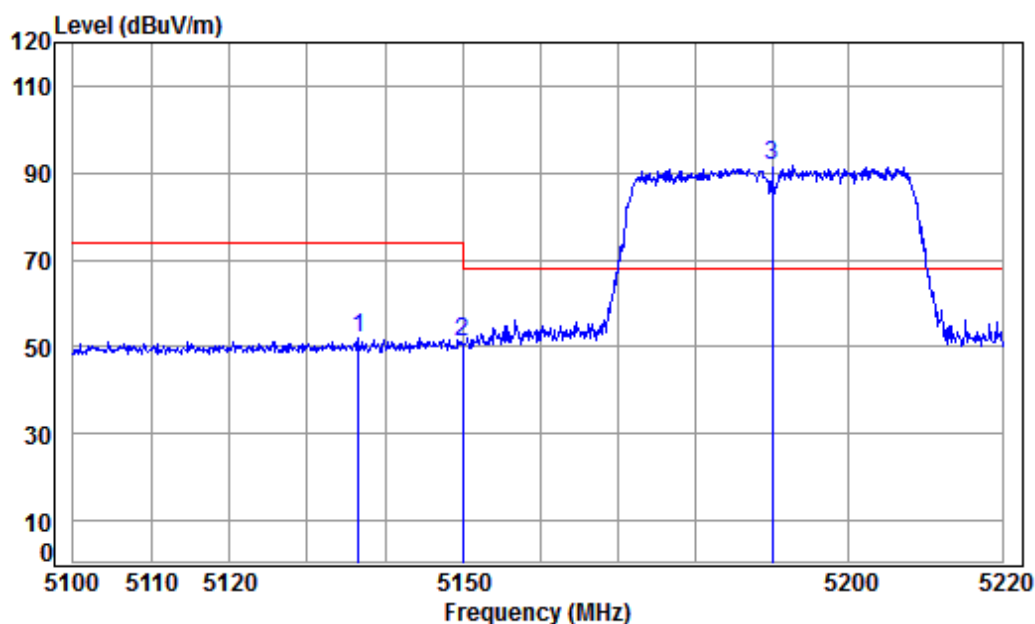

Condition: 3m HORIZONTAL

Job No : 0217RG

Mode : 5190 Band edge

: Ant 2 5G WIFI 11AC(40) CH38

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	5136.543	8.30	34.47	38.19	47.34	51.92	74.00	-22.08	peak
2	5149.980	8.33	34.47	38.18	46.48	51.10	74.00	-22.90	peak
3 pp	5190.000	8.39	34.46	38.18	87.00	91.67	68.20	23.47	peak




SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch

Report No.: SZEM180200138802

Page: 486 of 817

Test mode:	802.11ac(HT40)	Frequency(MHz):	5190	Average	Horizontal
------------	----------------	-----------------	------	---------	------------

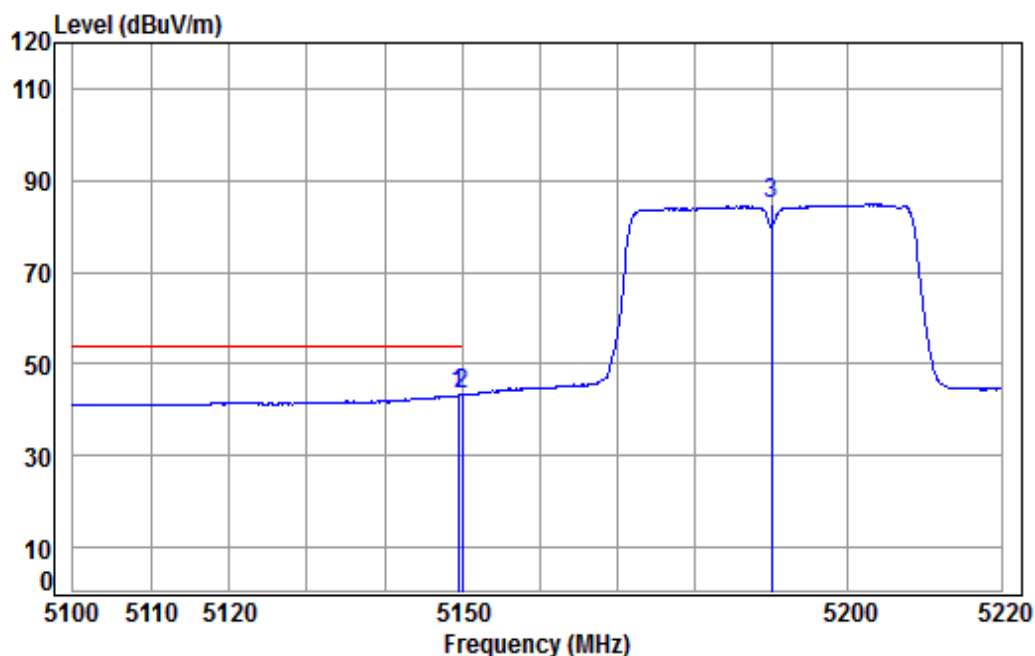

Condition: 3m HORIZONTAL

Job No : 0217RG

Mode : 5190 Band edge

: Ant 2 5G WIFI 11AC(40) CH38

		Cable	Ant	Preamp	Read		Limit	Over	
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	5149.461	8.32	34.47	38.18	38.57	43.18	54.00	-10.82	Average
2 pp	5149.980	8.33	34.47	38.18	38.63	43.25	54.00	-10.75	Average
3	5190.000	8.39	34.46	38.18	80.04	84.71	-----	-----	Average




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM180200138802

Page: 487 of 817

Test mode:	802.11ac(HT40)	Frequency(MHz):	5230	Peak	Vertical
------------	----------------	-----------------	------	------	----------

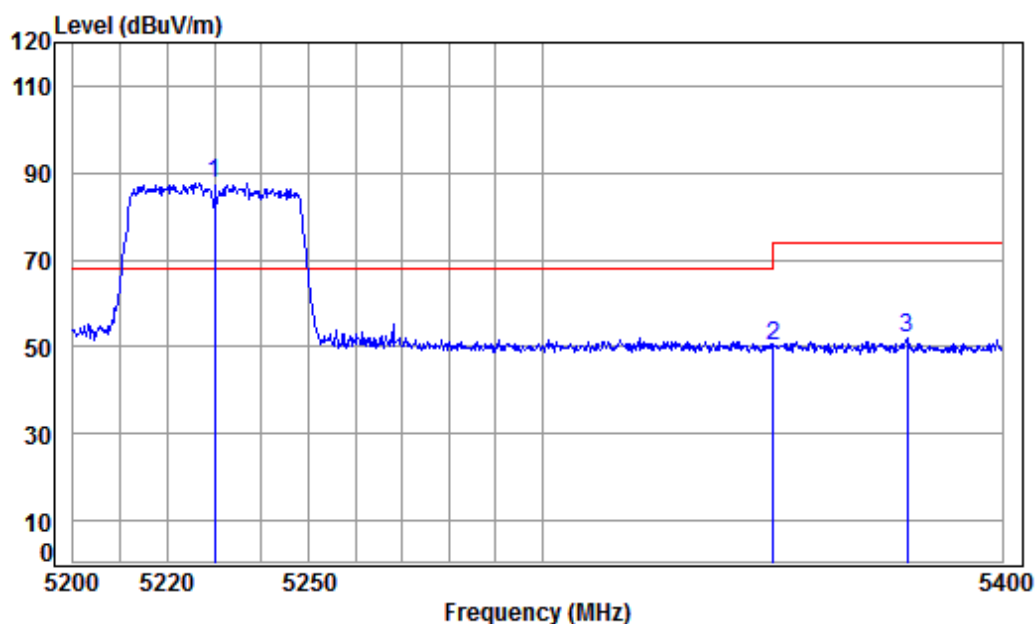

Condition: 3m VERTICAL

Job No : 0217RG

Mode : 5230 Band edge

: Ant 2 5G WIFI 11AC(40) CH46

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Limit	Over	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1 pp	5230.000	8.45	34.45	38.18	82.85	87.57	68.20	19.37 Peak
2	5350.020	8.63	34.43	38.16	45.27	50.17	74.00	-23.83 Peak
3	5379.252	8.67	34.42	38.16	47.06	51.99	74.00	-22.01 Peak




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM180200138802

Page: 488 of 817

Test mode:	802.11ac(HT40)	Frequency(MHz):	5230	Average	Vertical
------------	----------------	-----------------	------	---------	----------

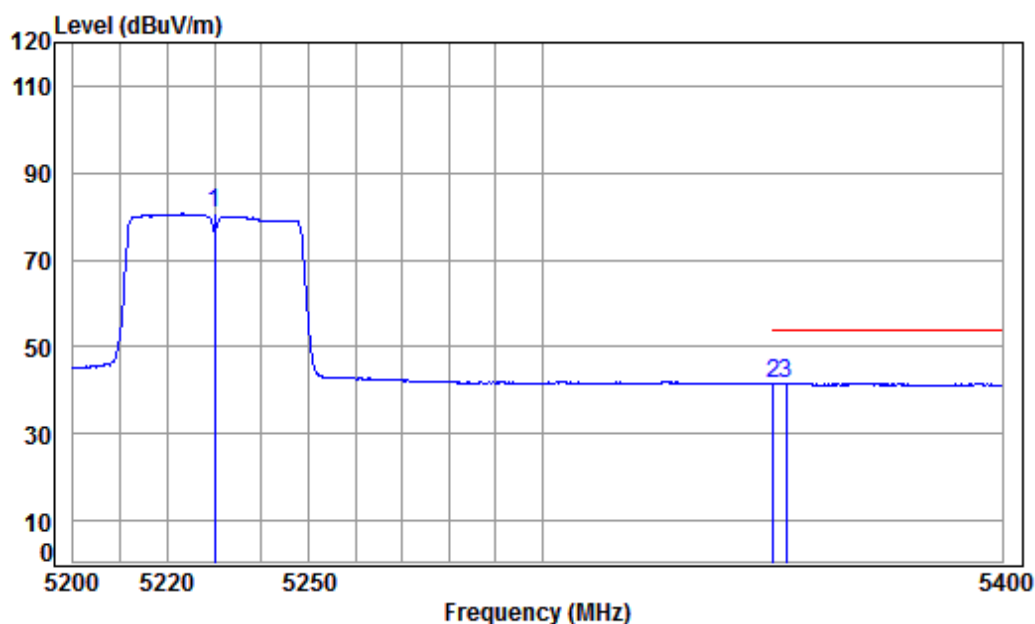

Condition: 3m VERTICAL

Job No : 0217RG

Mode : 5230 Band edge

: Ant 2 5G WIFI 11AC(40) CH46

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Limit Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	5230.000	8.45	34.45	38.18	75.88	80.60	-----	-----	Average
2	5350.020	8.63	34.43	38.16	36.71	41.61	54.00	-12.39	Average
3 pp	5352.723	8.63	34.43	38.16	36.75	41.65	54.00	-12.35	Average




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM180200138802

Page: 489 of 817

Test mode:	802.11ac(HT40)	Frequency(MHz):	5230	Peak	Horizontal
------------	----------------	-----------------	------	------	------------

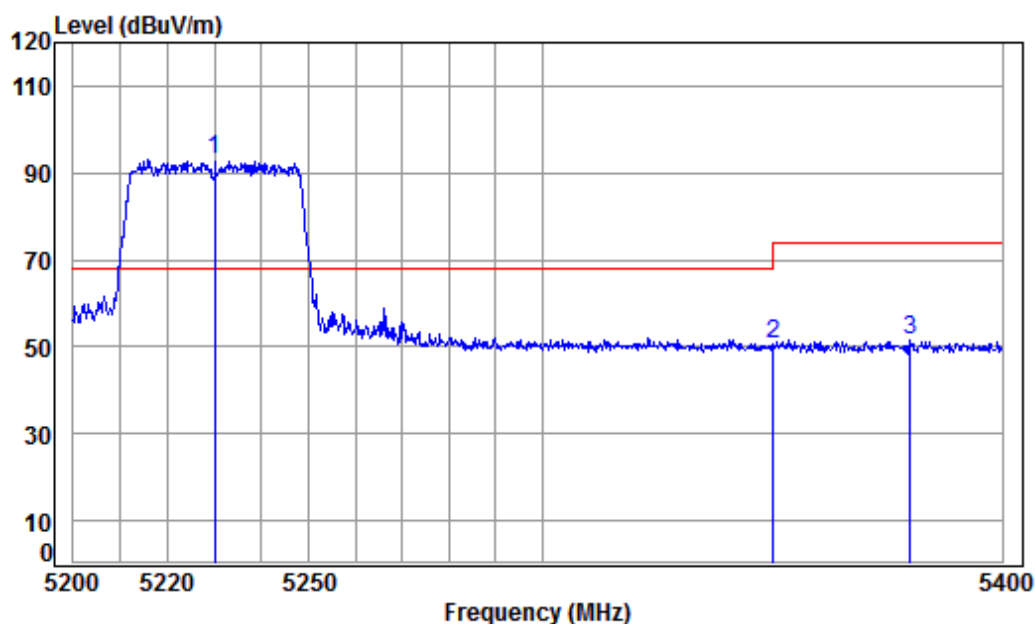

Condition: 3m HORIZONTAL

Job No : 0217RG

Mode : 5230 Band edge

: Ant 2 5G WIFI 11AC(40) CH46

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1 pp	5230.000	8.45	34.45	38.18	88.16	92.88	68.20	24.68 peak
2	5350.020	8.63	34.43	38.16	45.84	50.74	74.00	-23.26 peak
3	5379.862	8.67	34.42	38.16	46.52	51.45	74.00	-22.55 peak




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM180200138802

Page: 490 of 817

Test mode:	802.11ac(HT40)	Frequency(MHz):	5230	Average	Horizontal
------------	----------------	-----------------	------	---------	------------

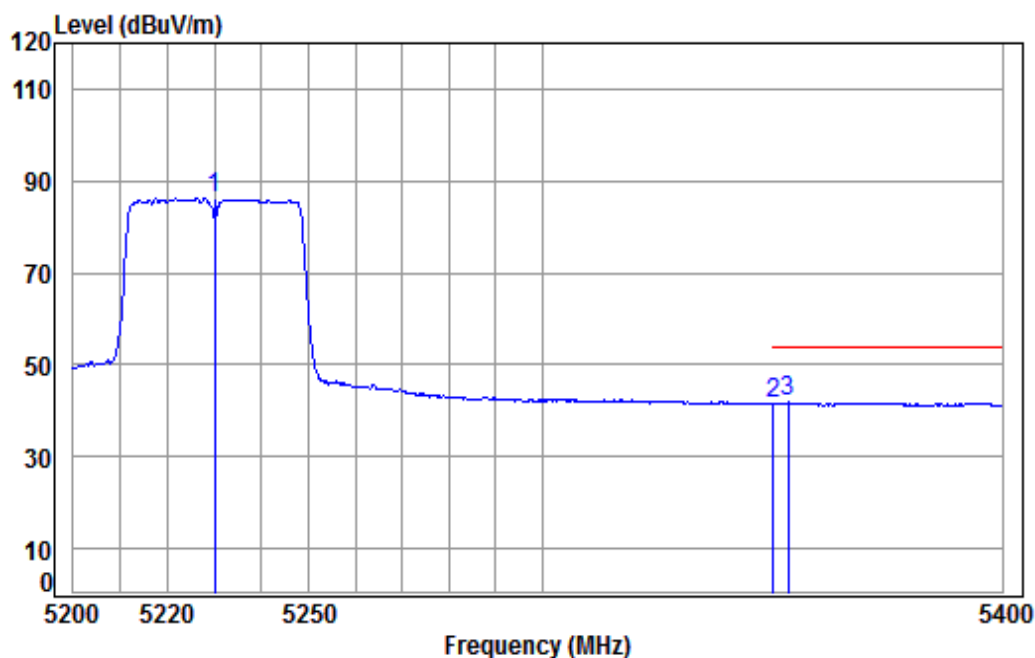

Condition: 3m HORIZONTAL

Job No : 0217RG

Mode : 5230 Band edge

: Ant 2 5G WIFI 11AC(40) CH46

		Cable	Ant	Preamp	Read		Limit	Over	
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	5230.000	8.45	34.45	38.18	81.49	86.21	-----	-----	Average
2	5350.020	8.63	34.43	38.16	36.78	41.68	54.00	-12.32	Average
3 pp	5353.330	8.63	34.43	38.16	36.89	41.79	54.00	-12.21	Average




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM180200138802

Page: 491 of 817

Test mode:	802.11ac(HT40)	Frequency(MHz):	5270	Peak	Vertical
------------	----------------	-----------------	------	------	----------

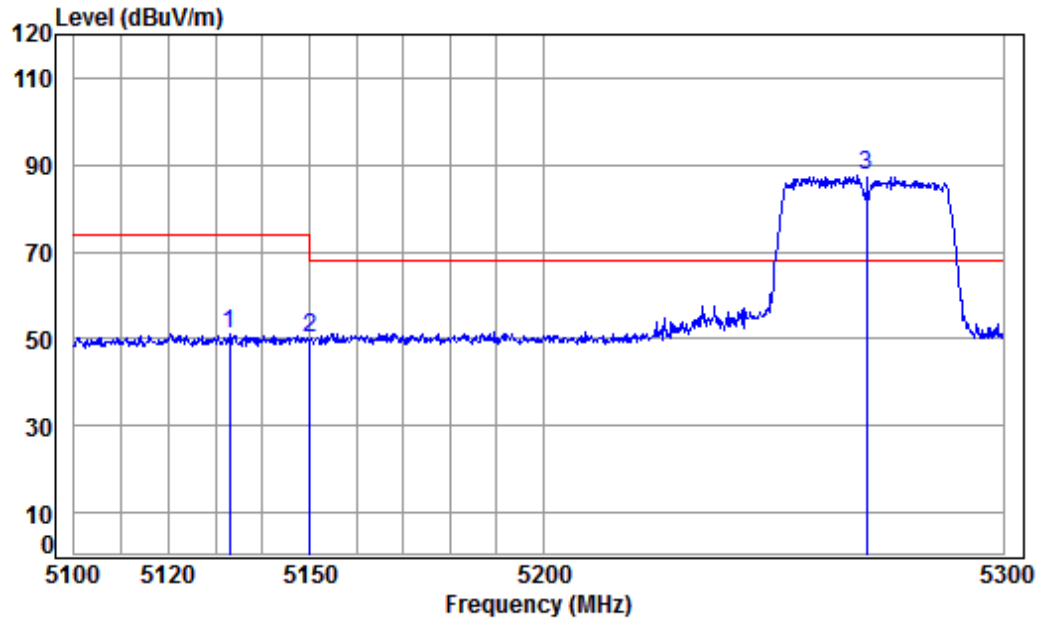

Condition: 3m VERTICAL

Job No : 0217RG

Mode : 5270 Band edge

: Ant 2 5G WIFI 11AC(40) CH54

	Freq	Cable Loss	Ant Factor	Preamplifier Factor	Read Level	Limit Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	5132.867	8.30	34.47	38.19	46.55	51.13	74.00	-22.87	Peak
2	5149.980	8.33	34.47	38.18	45.52	50.14	74.00	-23.86	Peak
3 pp	5270.000	8.51	34.44	38.17	82.81	87.59	68.20	19.39	Peak




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM180200138802

Page: 492 of 817

Test mode:	802.11ac(HT40)	Frequency(MHz):	5270	Average	Vertical
------------	----------------	-----------------	------	---------	----------

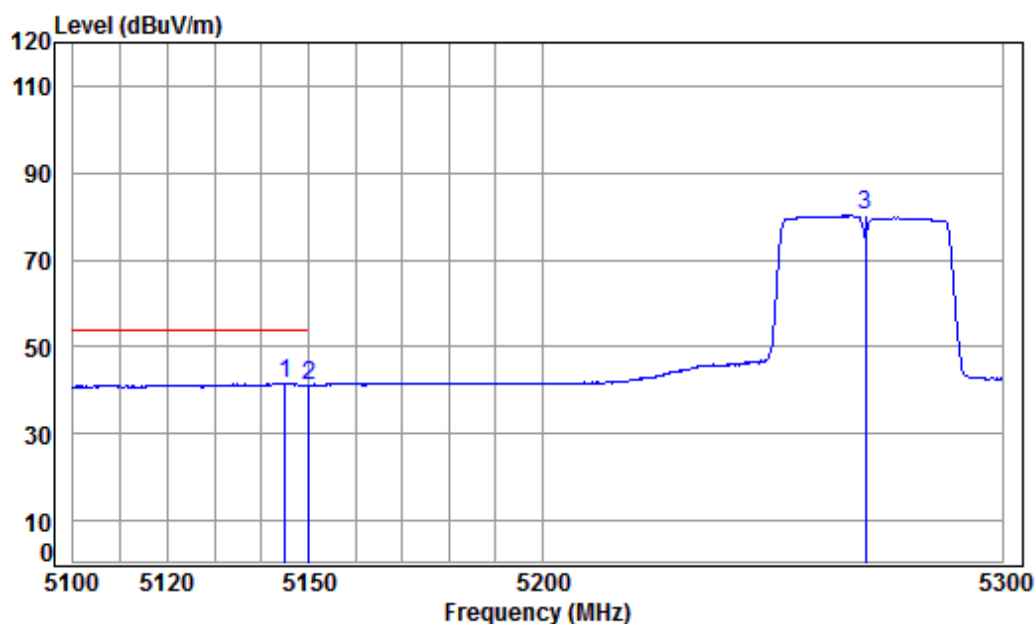

Condition: 3m VERTICAL

Job No : 0217RG

Mode : 5270 Band edge

: Ant 2 5G WIFI 11AC(40) CH54

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Limit Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1 pp	5144.925	8.32	34.47	38.18	36.87	41.48	54.00	-12.52	Average
2	5149.980	8.33	34.47	38.18	36.66	41.28	54.00	-12.72	Average
3	5270.000	8.51	34.44	38.17	75.37	80.15	-----	-----	Average




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM180200138802

Page: 493 of 817

Test mode:	802.11ac(HT40)	Frequency(MHz):	5270	Peak	Horizontal
------------	----------------	-----------------	------	------	------------

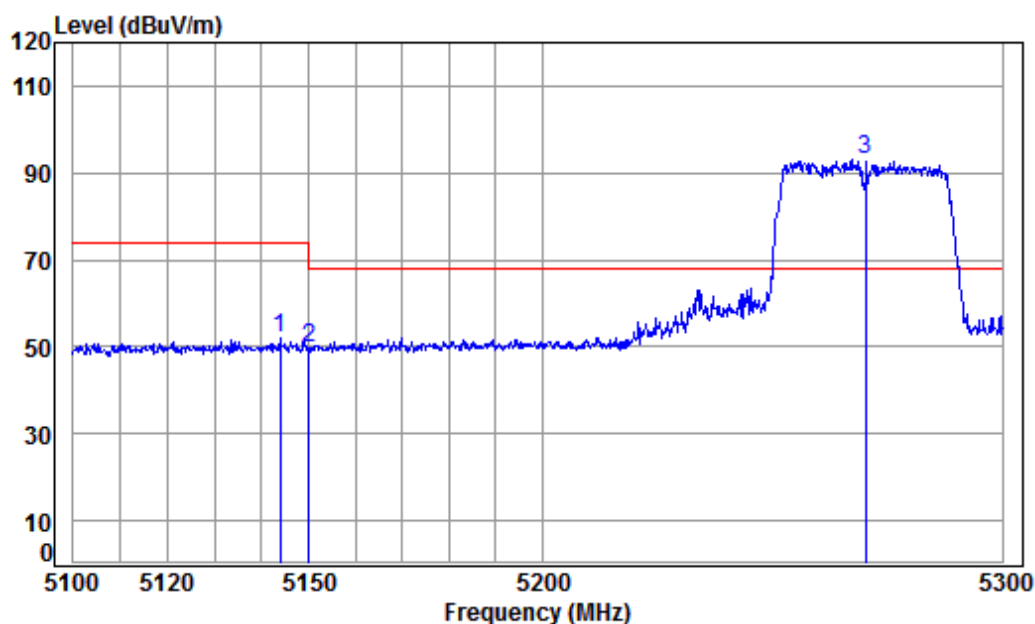

Condition: 3m HORIZONTAL

Job No : 0217RG

Mode : 5270 Band edge

: Ant 2 5G WIFI 11AC(40) CH54

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Limit Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	5143.936	8.32	34.47	38.18	47.21	51.82	74.00	-22.18	peak
2	5149.980	8.33	34.47	38.18	45.13	49.75	74.00	-24.25	peak
3 pp	5270.000	8.51	34.44	38.17	88.14	92.92	68.20	24.72	peak




SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch

Report No.: SZEM180200138802

Page: 494 of 817

Test mode:	802.11ac(HT40)	Frequency(MHz):	5270	Average	Horizontal
------------	----------------	-----------------	------	---------	------------

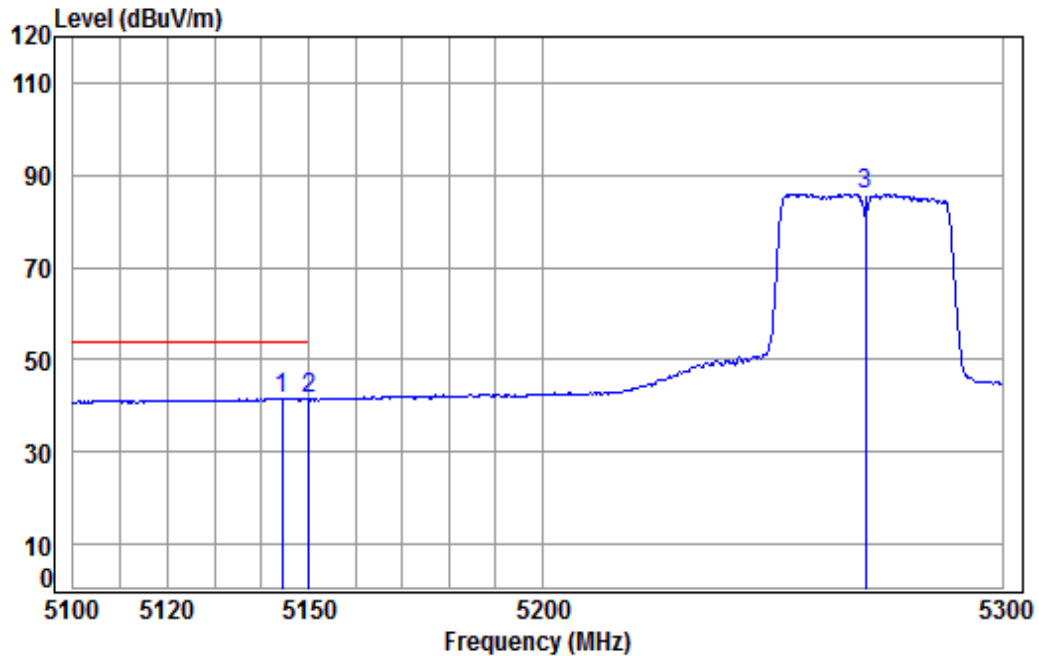

Condition: 3m HORIZONTAL

Job No : 0217RG

Mode : 5270 Band edge

: Ant 2 5G WIFI 11AC(40) CH54

		Cable	Ant	Preamp	Read		Limit	Over	
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1 pp	5144.332	8.32	34.47	38.18	36.93	41.54	54.00	-12.46	Average
2	5149.980	8.33	34.47	38.18	36.87	41.49	54.00	-12.51	Average
3	5270.000	8.51	34.44	38.17	81.14	85.92	-----	-----	Average




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM180200138802

Page: 495 of 817

Test mode:	802.11ac(HT40)	Frequency(MHz):	5310	Peak	Vertical
------------	----------------	-----------------	------	------	----------

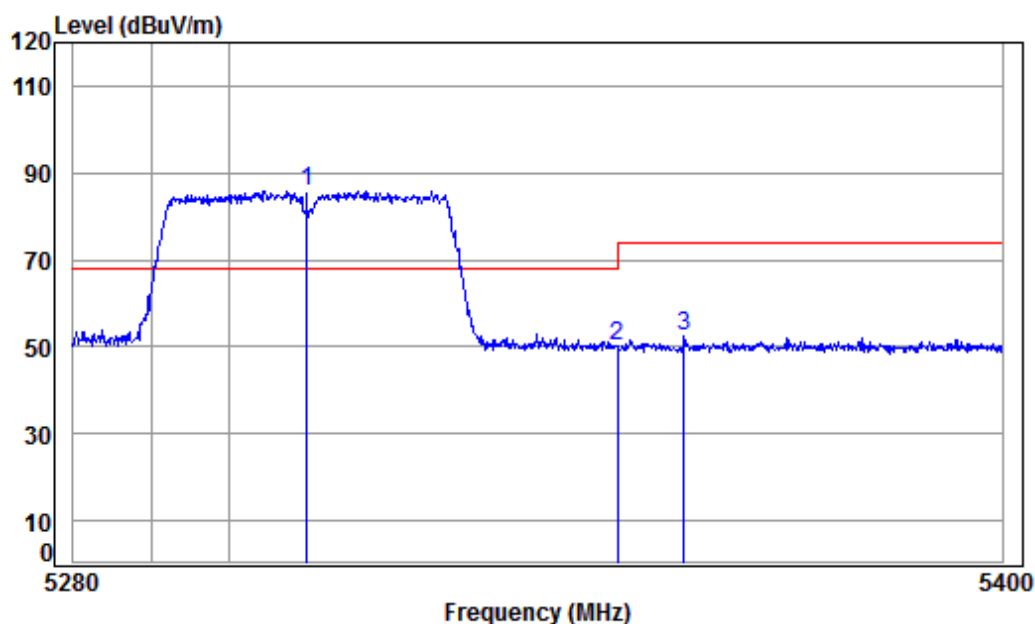

Condition: 3m VERTICAL

Job No : 0217RG

Mode : 5310 Band edge

: Ant 2 5G WIFI 11AC(40) CH62

		Cable	Ant	Preamp	Read	Limit	Over	
	Freq	Loss	Factor	Factor	Level	Line	Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1 pp	5310.000	8.57	34.44	38.17	81.13	85.97	68.20	17.77 Peak
2	5350.020	8.63	34.43	38.16	45.26	50.16	74.00	-23.84 Peak
3	5358.536	8.64	34.43	38.16	47.34	52.25	74.00	-21.75 Peak




SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch

Report No.: SZEM180200138802

Page: 496 of 817

Test mode:	802.11ac(HT40)	Frequency(MHz):	5310	Average	Vertical
------------	----------------	-----------------	------	---------	----------

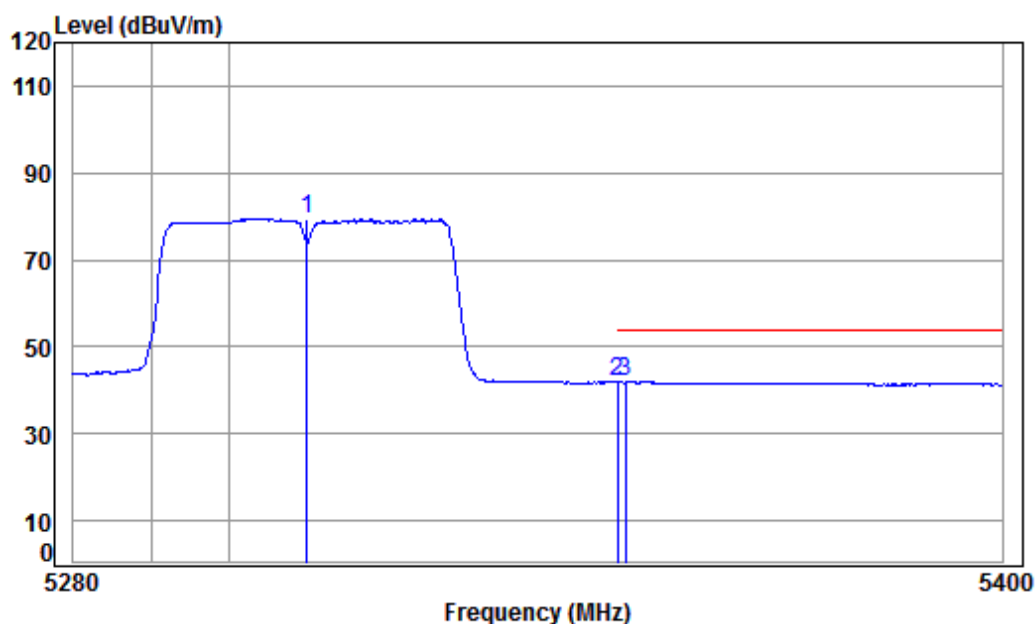

Condition: 3m VERTICAL

Job No : 0217RG

Mode : 5310 Band edge

: Ant 2 5G WIFI 11AC(40) CH62

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Limit Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	5310.000	8.57	34.44	38.17	74.69	79.53	-----	-----	Average
2	5350.020	8.63	34.43	38.16	37.00	41.90	54.00	-12.10	Average
3 pp	5351.075	8.63	34.43	38.16	37.03	41.93	54.00	-12.07	Average




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM180200138802

Page: 497 of 817

Test mode:	802.11ac(HT40)	Frequency(MHz):	5310	Peak	Horizontal
------------	----------------	-----------------	------	------	------------

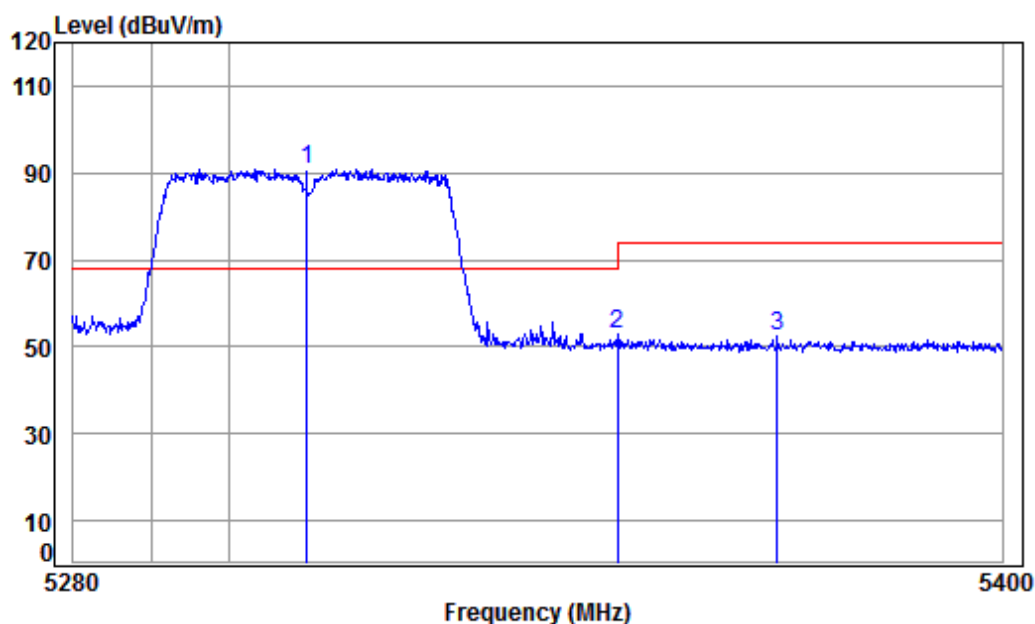

Condition: 3m HORIZONTAL

Job No : 0217RG

Mode : 5310 Band edge

: Ant 2 5G WIFI 11AC(40) CH62

		Cable	Ant	Preamp	Read	Limit	Over	
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1	pp 5310.000	8.57	34.44	38.17	85.99	90.83	68.20	22.63 peak
2	5350.020	8.63	34.43	38.16	48.20	53.10	74.00	-20.90 peak
3	5370.712	8.66	34.42	38.16	47.41	52.33	74.00	-21.67 peak




SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch

Report No.: SZEM180200138802

Page: 498 of 817

Test mode:	802.11ac(HT40)	Frequency(MHz):	5310	Average	Horizontal
------------	----------------	-----------------	------	---------	------------

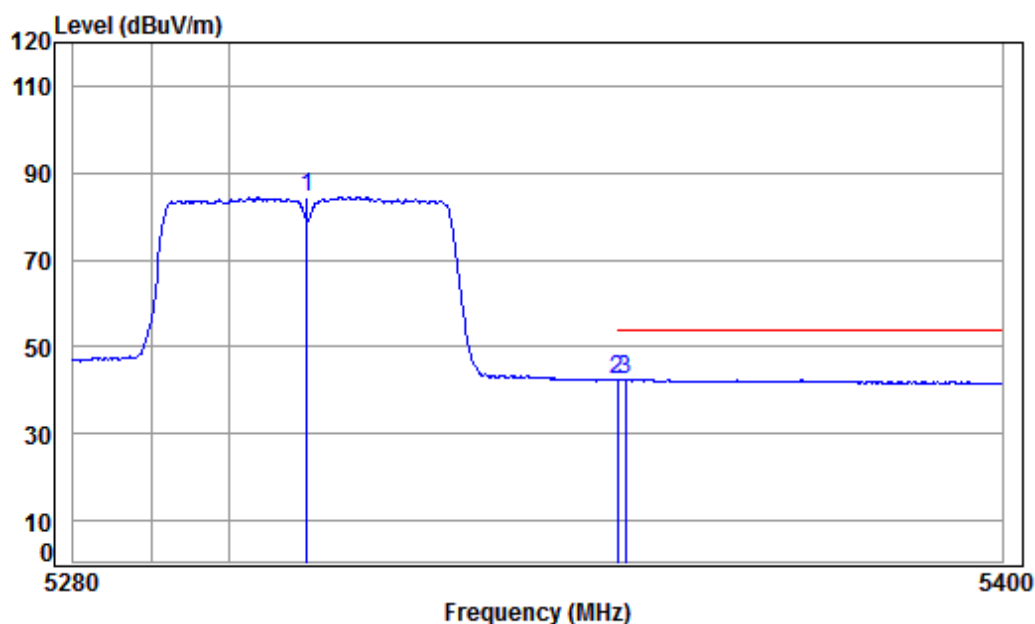

Condition: 3m HORIZONTAL

Job No : 0217RG

Mode : 5310 Band edge

: Ant 2 5G WIFI 11AC(40) CH62

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Limit Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	5310.000	8.57	34.44	38.17	79.61	84.45	-----	-----	Average
2	5350.020	8.63	34.43	38.16	37.55	42.45	54.00	-11.55	Average
3 pp	5351.075	8.63	34.43	38.16	37.56	42.46	54.00	-11.54	Average




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM180200138802

Page: 499 of 817

Test mode:	802.11ac(HT40)	Frequency(MHz):	5510	Peak	Vertical
------------	----------------	-----------------	------	------	----------

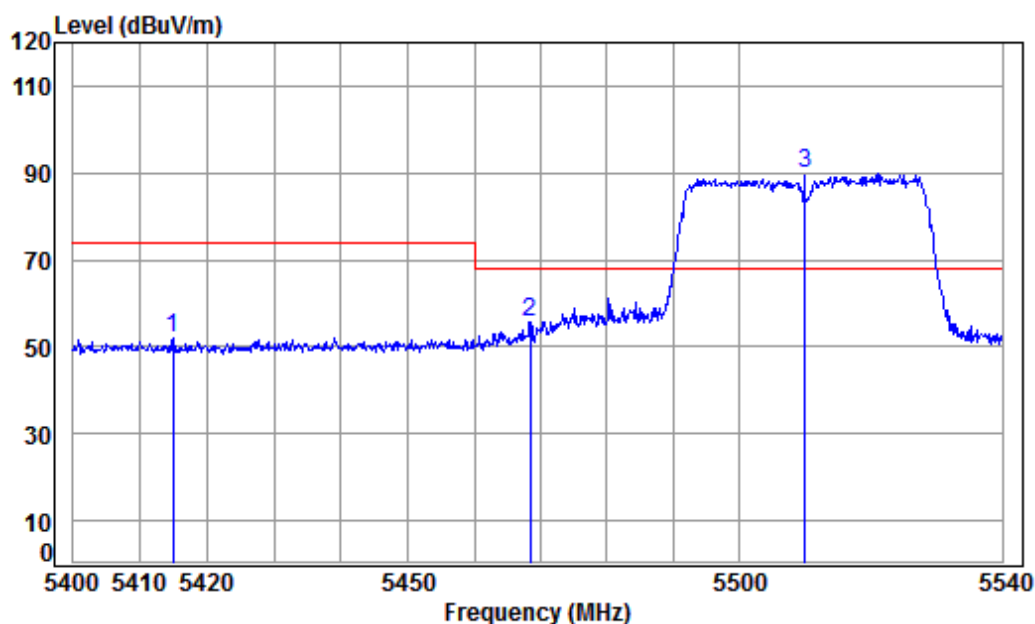

Condition: 3m VERTICAL

Job No : 0217RG

Mode : 5510 Band edge

: Ant 2 5G WIFI 11AC(40) CH102

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	5414.948	8.73	34.42	38.16	47.16	52.15	74.00	-21.85	Peak
2	5468.432	8.80	34.41	38.15	50.73	55.79	68.20	-12.41	peak
3 pp	5510.000	8.89	34.41	38.15	84.88	90.03	68.20	21.83	Peak




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM180200138802

Page: 500 of 817

Test mode:	802.11ac(HT40)	Frequency(MHz):	5510	Average	Vertical
------------	----------------	-----------------	------	---------	----------

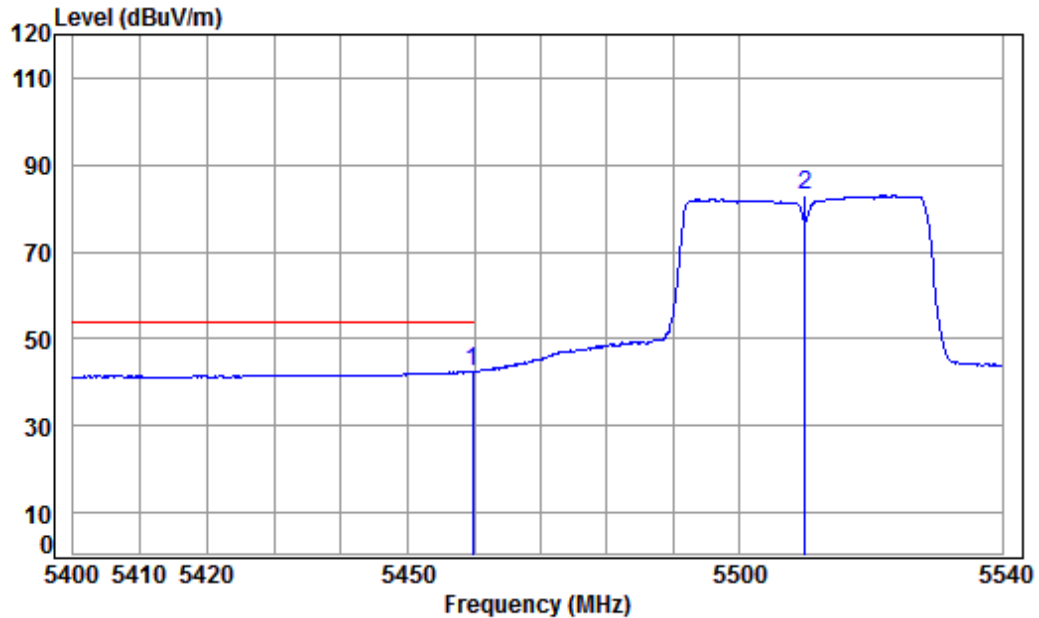

Condition: 3m VERTICAL

Job No : 0217RG

Mode : 5510 Band edge

: Ant 2 5G WIFI 11AC(40) CH102

		Cable	Ant	Preamp	Read	Limit	Over	
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1 pp	5459.761	8.79	34.41	38.15	37.44	42.49	54.00	-11.51 Average
2	5510.000	8.89	34.41	38.15	77.72	82.87	-----	----- Average




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM180200138802

Page: 501 of 817

Test mode:	802.11ac(HT40)	Frequency(MHz):	5510	Peak	Horizontal
------------	----------------	-----------------	------	------	------------

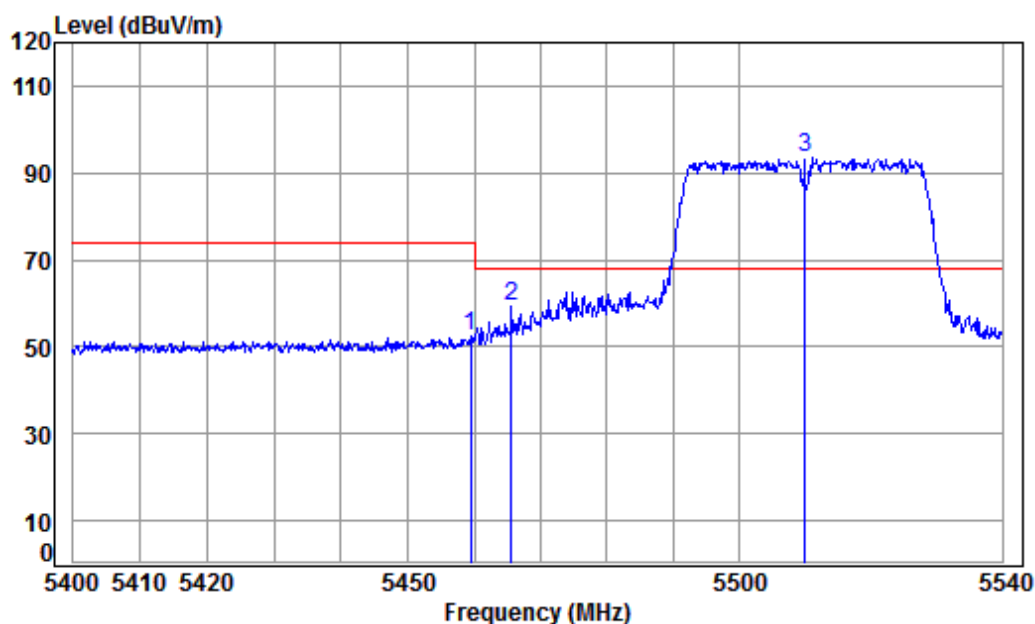

Condition: 3m HORIZONTAL

Job No : 0217RG

Mode : 5510 Band edge

: Ant 2 5G WIFI 11AC(40) CH102

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	5459.481	8.79	34.41	38.15	47.23	52.28	74.00	-21.72	peak
2	5465.634	8.80	34.41	38.15	54.04	59.10	68.20	-9.10	peak
3 pp	5510.000	8.89	34.41	38.15	88.28	93.43	68.20	25.23	peak




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM180200138802

Page: 502 of 817

Test mode:	802.11ac(HT40)	Frequency(MHz):	5510	Average	Horizontal
------------	----------------	-----------------	------	---------	------------

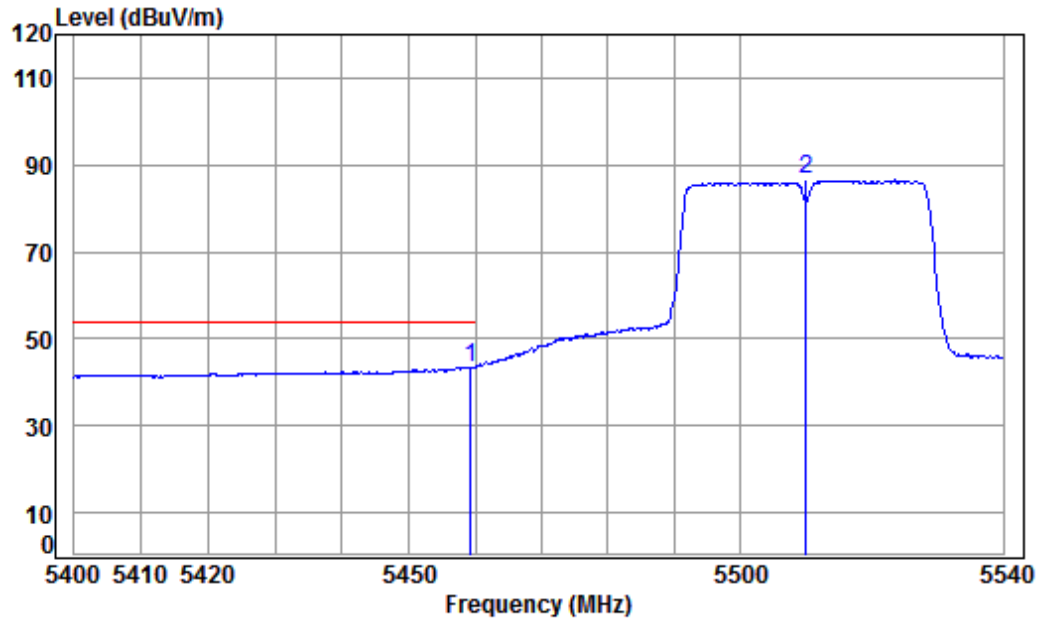

Condition: 3m HORIZONTAL

Job No : 0217RG

Mode : 5510 Band edge

: Ant 2 5G WIFI 11AC(40) CH102

		Cable	Ant	Preamp	Read	Limit	Over	
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1 pp	5459.342	8.79	34.41	38.15	38.52	43.57	54.00	-10.43 Average
2	5510.000	8.89	34.41	38.15	81.32	86.47	-----	----- Average




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM180200138802

Page: 503 of 817

Test mode:	802.11ac(HT40)	Frequency(MHz):	5670	Peak	Vertical
------------	----------------	-----------------	------	------	----------

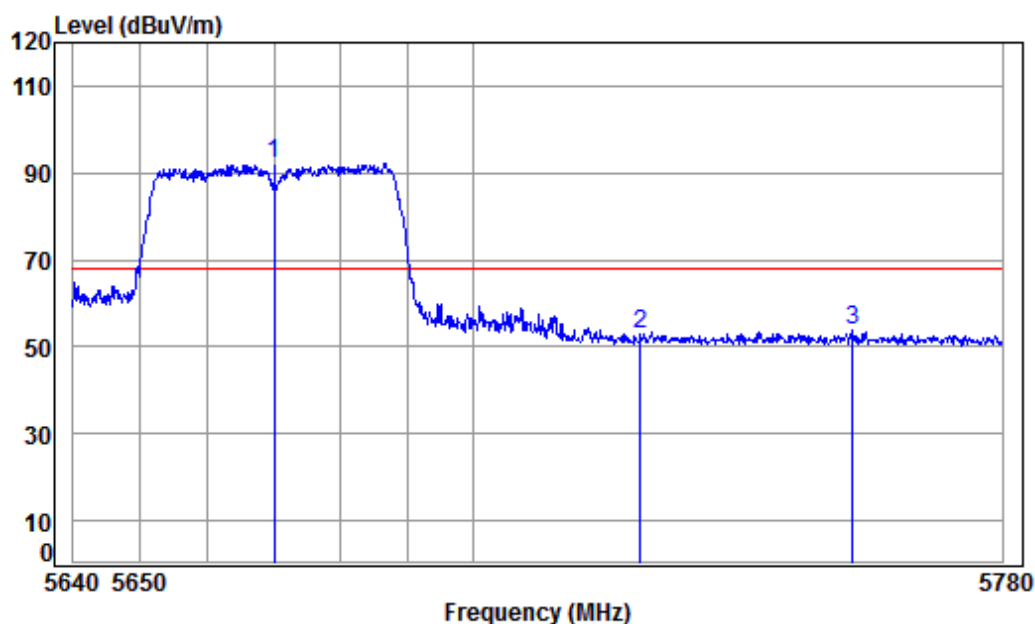

Condition: 3m VERTICAL

Job No : 0217RG

Mode : 5670 Band edge

: Ant 2 5G WIFI 11AC(40) CH134

		Cable	Ant	Preamp	Read	Limit	Over	
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1 pp	5670.000	9.45	34.50	38.13	86.31	92.13	68.20	23.93 Peak
2	5725.000	9.64	34.54	38.13	46.80	52.85	68.20	-15.35 Peak
3	5757.228	9.75	34.56	38.12	47.51	53.70	68.20	-14.50 Peak




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM180200138802

Page: 504 of 817

Test mode:	802.11ac(HT40)	Frequency(MHz):	5670	Peak	Horizontal
------------	----------------	-----------------	------	------	------------

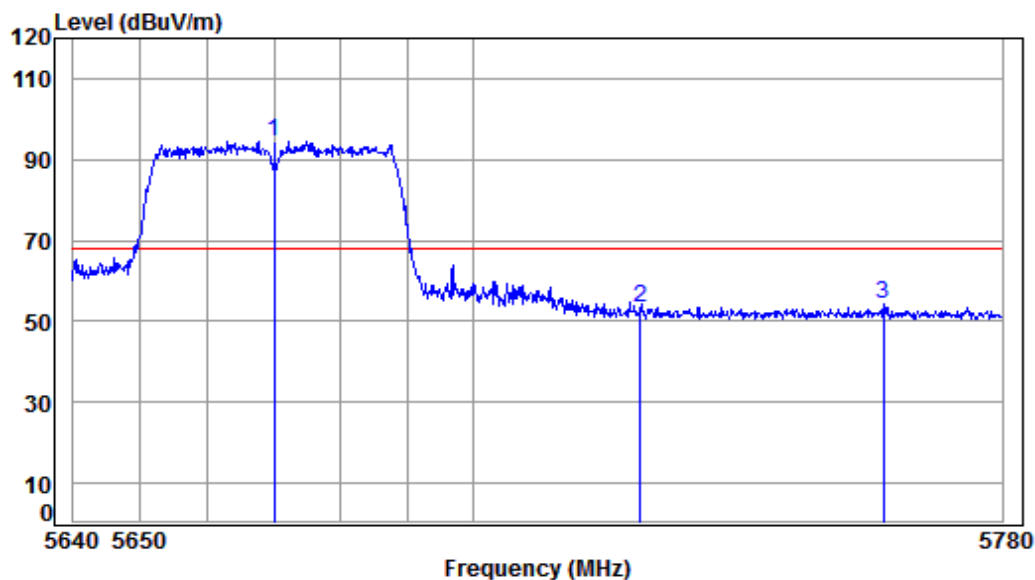

Condition: 3m HORIZONTAL

Job No : 0217RG

Mode : 5670 Band edge

: Ant 2 5G WIFI 11AC(40) CH134

		Cable	Ant	Preamp	Read	Limit	Over	
	Freq	Loss	Factor	Factor	Level	Line	Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1 pp	5670.000	9.45	34.50	38.13	88.70	94.52	68.20	26.32 peak
2	5725.000	9.64	34.54	38.13	47.12	53.17	68.20	-15.03 peak
3	5761.888	9.77	34.56	38.12	48.03	54.24	68.20	-13.96 peak




SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch

Report No.: SZEM180200138802

Page: 505 of 817

Test mode:	802.11ac(HT40)	Frequency(MHz):	5755	Peak	Vertical
------------	----------------	-----------------	------	------	----------

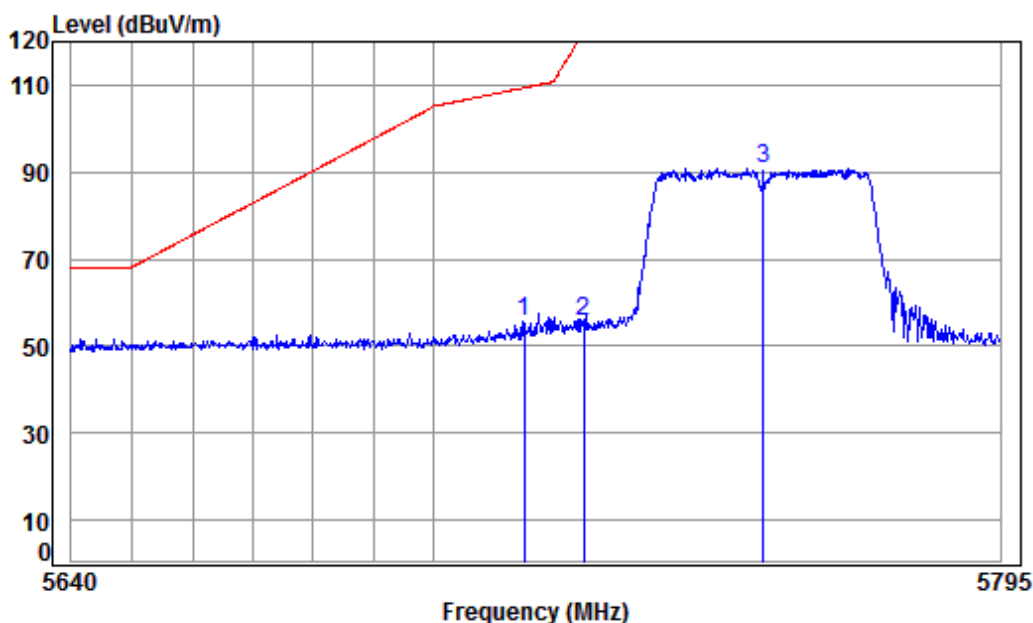

Condition: 3m VERTICAL

Job No : 0217RG

Mode : 5755 Band edge

: Ant 1 5G WIFI 11AC(40) CH151

		Cable	Ant	Preamp	Read	Limit	Over	
Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	5715.000	9.61	34.53	38.13	49.49	55.50	109.40	-53.90 peak
2	5725.000	9.64	34.54	38.13	49.55	55.60	122.20	-66.60 peak
3 pp	5755.000	9.75	34.56	38.12	84.57	90.76	125.20	-34.44 peak




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM180200138802

Page: 506 of 817

Test mode:	802.11ac(HT40)	Frequency(MHz):	5755	Peak	Horizontal
------------	----------------	-----------------	------	------	------------

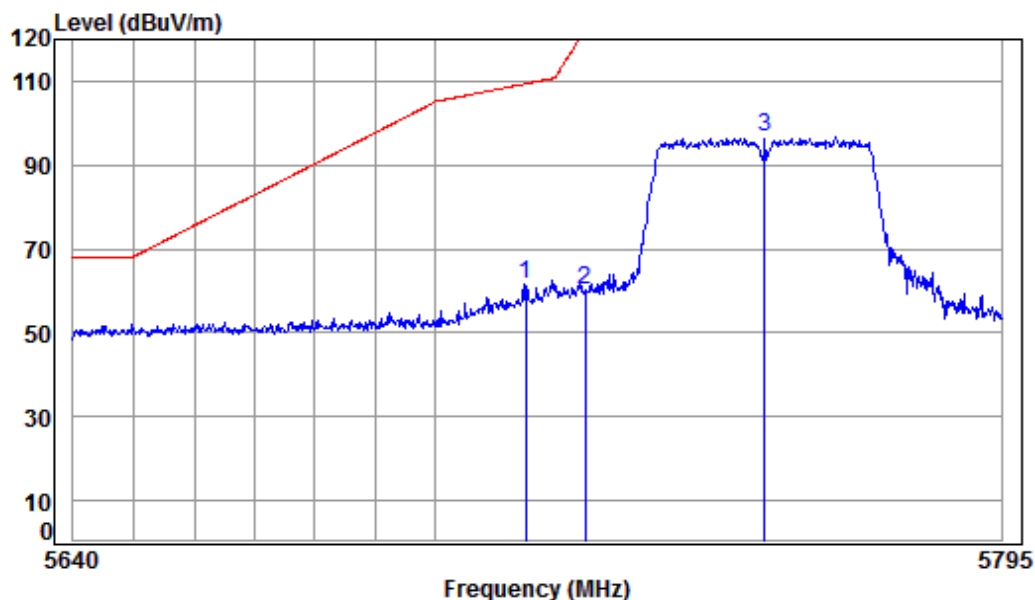

Condition: 3m HORIZONTAL

Job No : 0217RG

Mode : 5755 Band edge

: Ant 1 5G WIFI 11AC(40) CH151

		Cable	Ant	Preamp	Read	Limit	Over	
	Freq	Loss	Factor	Factor	Level	Level	Line	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1	5715.000	9.61	34.53	38.13	55.49	61.50	109.40	-47.90 peak
2	5725.000	9.64	34.54	38.13	54.26	60.31	122.20	-61.89 peak
3 pp	5755.000	9.75	34.56	38.12	90.43	96.62	125.20	-28.58 peak




SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch

Report No.: SZEM180200138802

Page: 507 of 817

Test mode:	802.11ac(HT40)	Frequency(MHz):	5795	Peak	Vertical
------------	----------------	-----------------	------	------	----------

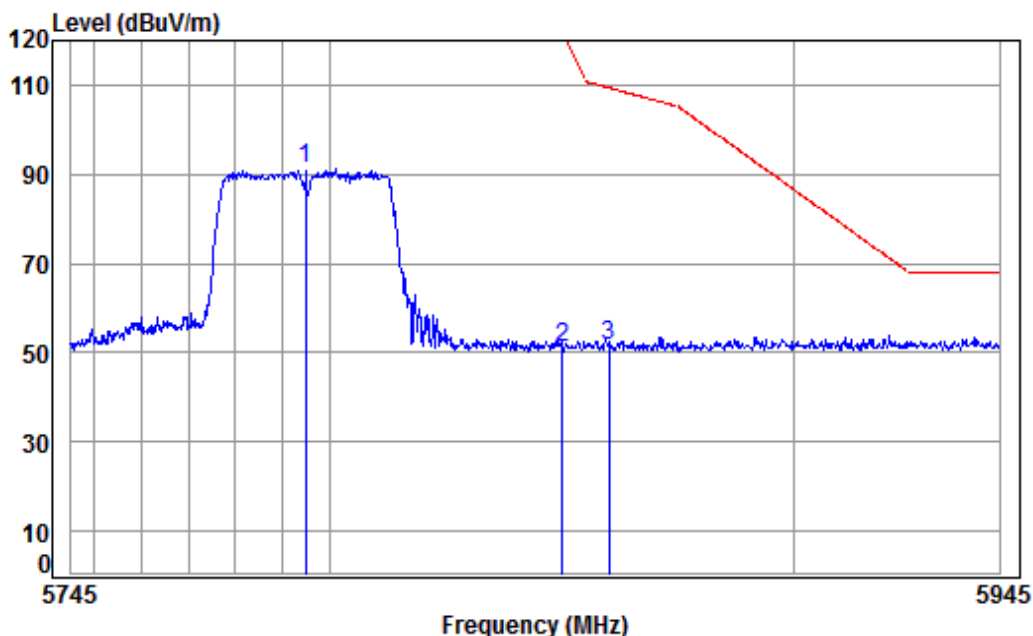

Condition: 3m VERTICAL

Job No : 0217RG

Mode : 5795 Band edge

: Ant 1 5G WIFI 11AC(40) CH159

		Cable	Ant	Preamp	Read	Limit	Over	
	Freq	Loss	Factor	Factor	Level	Line	Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1	pp 5795.000	9.88	34.58	38.12	84.76	91.10	125.20	-34.10 peak
2	5850.000	10.07	34.61	38.11	44.42	50.99	122.20	-71.21 peak
3	5860.000	10.10	34.62	38.11	45.08	51.69	109.40	-57.71 peak




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM180200138802

Page: 508 of 817

Test mode:	802.11ac(HT40)	Frequency(MHz):	5795	Peak	Horizontal
------------	----------------	-----------------	------	------	------------

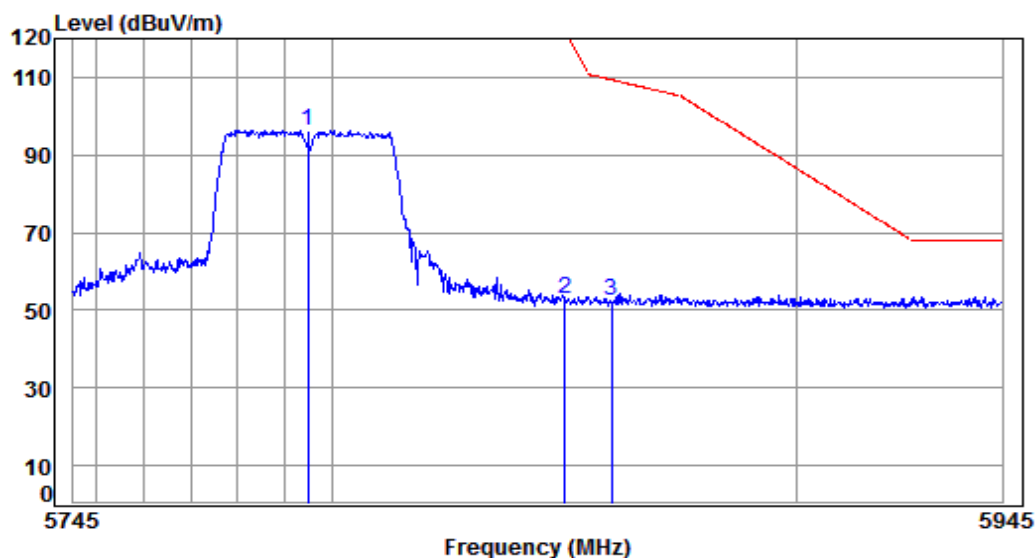

Condition: 3m HORIZONTAL

Job No : 0217RG

Mode : 5795 Band edge

: Ant 1 5G WIFI 11AC(40) CH159

		Cable	Ant	Preamp	Read	Limit	Over	
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1 pp	5795.000	9.88	34.58	38.12	90.12	96.46	125.20	-28.74 peak
2	5850.000	10.07	34.61	38.11	46.14	52.71	122.20	-69.49 peak
3	5860.000	10.10	34.62	38.11	45.64	52.25	109.40	-57.15 peak




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM180200138802

Page: 509 of 817

Test mode:	802.11ac(HT80)	Frequency(MHz):	5210	Peak	Vertical
------------	----------------	-----------------	------	------	----------

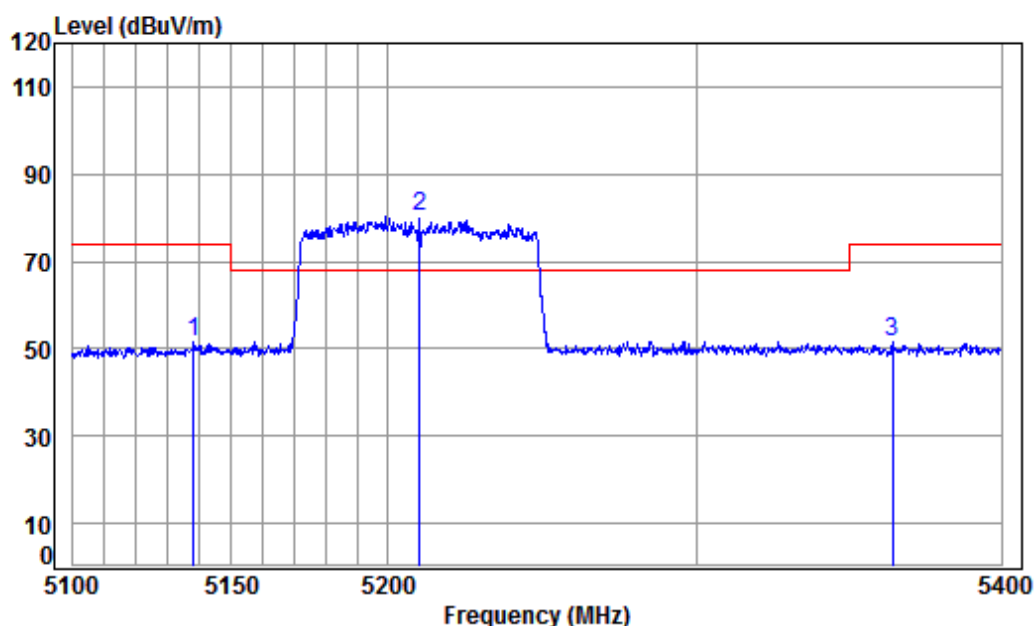

Condition: 3m VERTICAL

Job No : 0217RG

Mode : 5210 Band edge

: Ant 1 5G WIFI 11AC(80) CH42

		Cable	Ant	Preamp	Read		Limit	Over	
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	5138.037	8.31	34.47	38.19	46.78	51.37	74.00	-22.63	Peak
2	pp 5210.000	8.42	34.46	38.18	75.53	80.23	68.20	12.03	Peak
3	5364.008	8.65	34.43	38.16	46.49	51.41	74.00	-22.59	Peak




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM180200138802

Page: 510 of 817

Test mode:	802.11ac(HT80)	Frequency(MHz):	5210	Average	Vertical
------------	----------------	-----------------	------	---------	----------

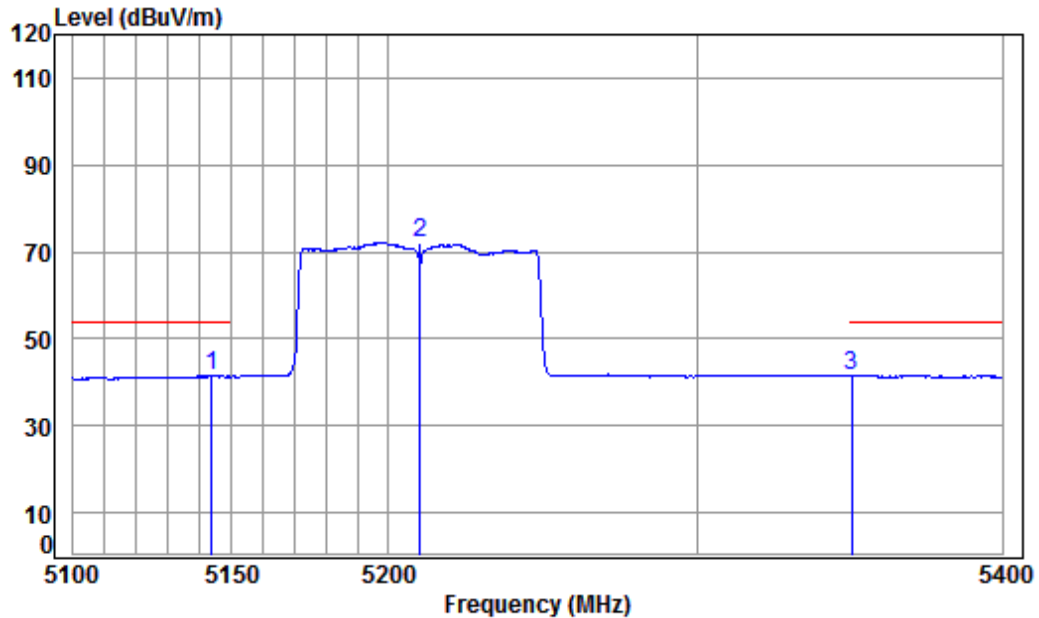

Condition: 3m VERTICAL

Job No : 0217RG

Mode : 5210 Band edge

: Ant 1 5G WIFI 11AC(80) CH42

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Limit Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	5143.620	8.32	34.47	38.18	36.84	41.45	54.00	-12.55	Average
2	5210.000	8.42	34.46	38.18	67.44	72.14	-----	-----	Average
3 pp	5350.229	8.63	34.43	38.16	36.80	41.70	54.00	-12.30	Average




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM180200138802

Page: 511 of 817

Test mode:	802.11ac(HT80)	Frequency(MHz):	5210	Peak	Horizontal
------------	----------------	-----------------	------	------	------------

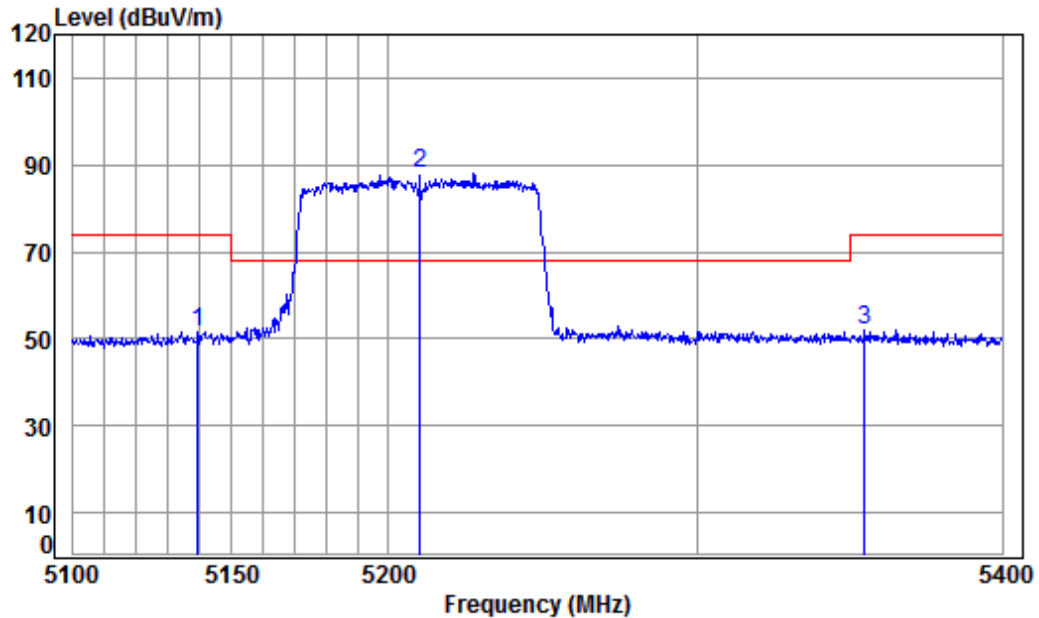

Condition: 3m HORIZONTAL

Job No : 0217RG

Mode : 5210 Band edge

: Ant 1 5G WIFI 11AC(80) CH42

		Cable	Ant	Preamp	Read		Limit	Over	
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	5139.212	8.31	34.47	38.18	47.00	51.60	74.00	-22.40	peak
2	pp 5210.000	8.42	34.46	38.18	83.56	88.26	68.20	20.06	peak
3	5354.512	8.64	34.43	38.16	47.24	52.15	74.00	-21.85	peak




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM180200138802

Page: 512 of 817

Test mode:	802.11ac(HT80)	Frequency(MHz):	5210	Average	Horizontal
------------	----------------	-----------------	------	---------	------------

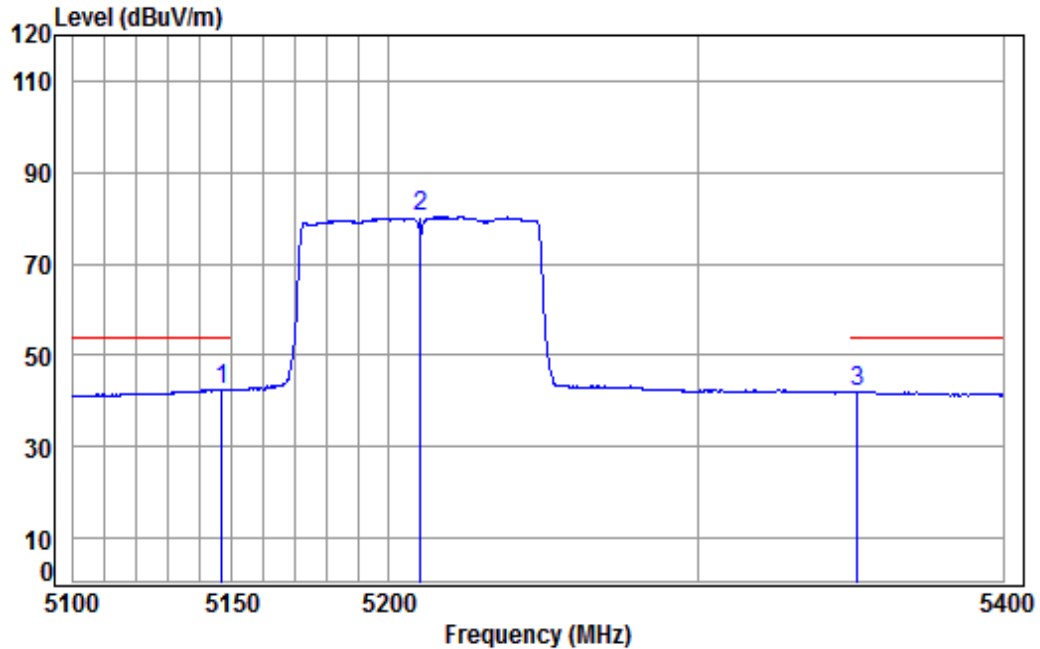

Condition: 3m HORIZONTAL

Job No : 0217RG

Mode : 5210 Band edge

: Ant 1 5G WIFI 11AC(80) CH42

		Cable	Ant	Preamp	Read	Limit	Over	
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1 pp	5146.855	8.32	34.47	38.18	37.84	42.45	54.00	-11.55 Average
2	5210.000	8.42	34.46	38.18	75.46	80.16	-----	----- Average
3	5351.758	8.63	34.43	38.16	37.28	42.18	54.00	-11.82 Average




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM180200138802

Page: 513 of 817

Test mode:	802.11ac(HT80)	Frequency(MHz):	5290	Peak	Vertical
------------	----------------	-----------------	------	------	----------

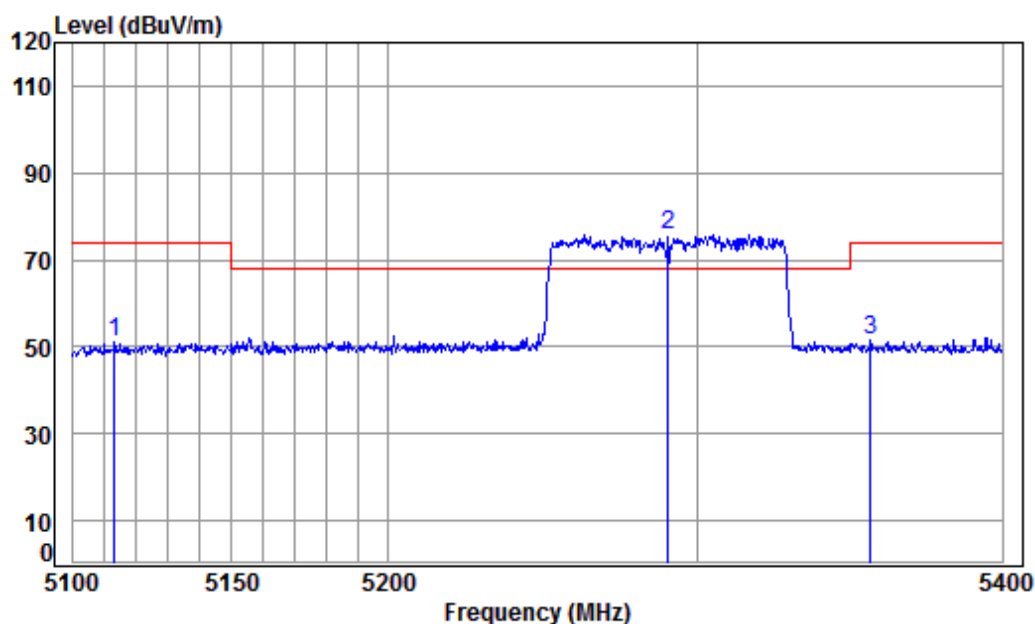

Condition: 3m VERTICAL

Job No : 0217RG

Mode : 5290 Band edge

: Ant 1 5G WIFI 11AC(80) CH58

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Limit Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	5113.135	8.27	34.48	38.19	46.48	51.04	74.00	-22.96	Peak
2	pp 5290.000	8.54	34.44	38.17	71.01	75.82	68.20	7.62	Peak
3	5356.348	8.64	34.43	38.16	46.61	51.52	74.00	-22.48	Peak




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM180200138802

Page: 514 of 817

Test mode:	802.11ac(HT80)	Frequency(MHz):	5290	Average	Vertical
------------	----------------	-----------------	------	---------	----------

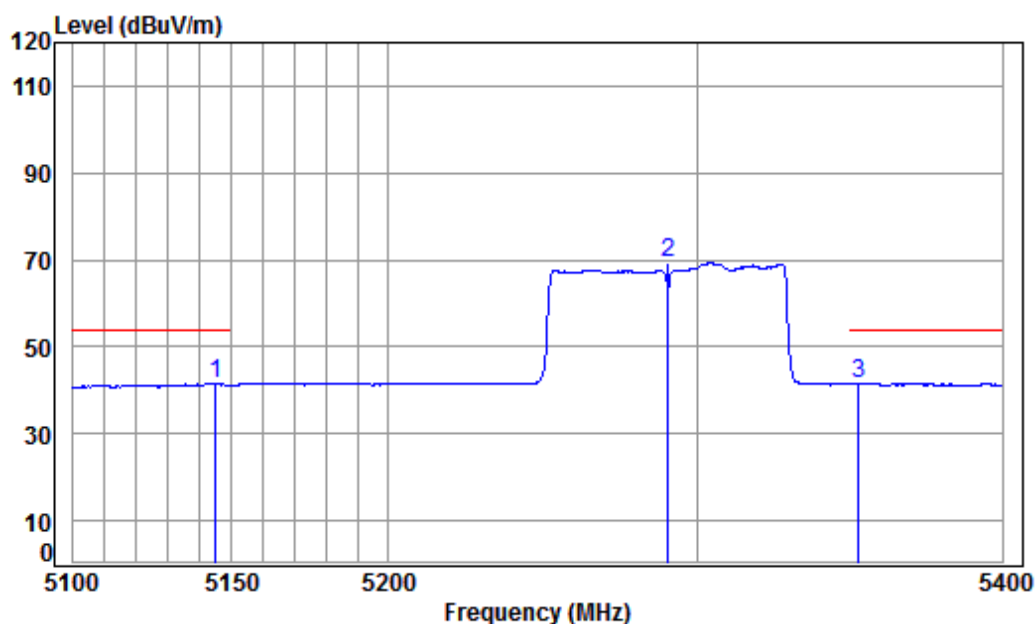

Condition: 3m VERTICAL

Job No : 0217RG

Mode : 5290 Band edge

: Ant 1 5G WIFI 11AC(80) CH58

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Limit Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	5145.090	8.32	34.47	38.18	36.84	41.45	54.00	-12.55	Average
2	5290.000	8.54	34.44	38.17	64.47	69.28	-----	-----	Average
3 pp	5352.370	8.63	34.43	38.16	36.84	41.74	54.00	-12.26	Average




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM180200138802

Page: 515 of 817

Test mode:	802.11ac(HT80)	Frequency(MHz):	5290	Peak	Horizontal
------------	----------------	-----------------	------	------	------------

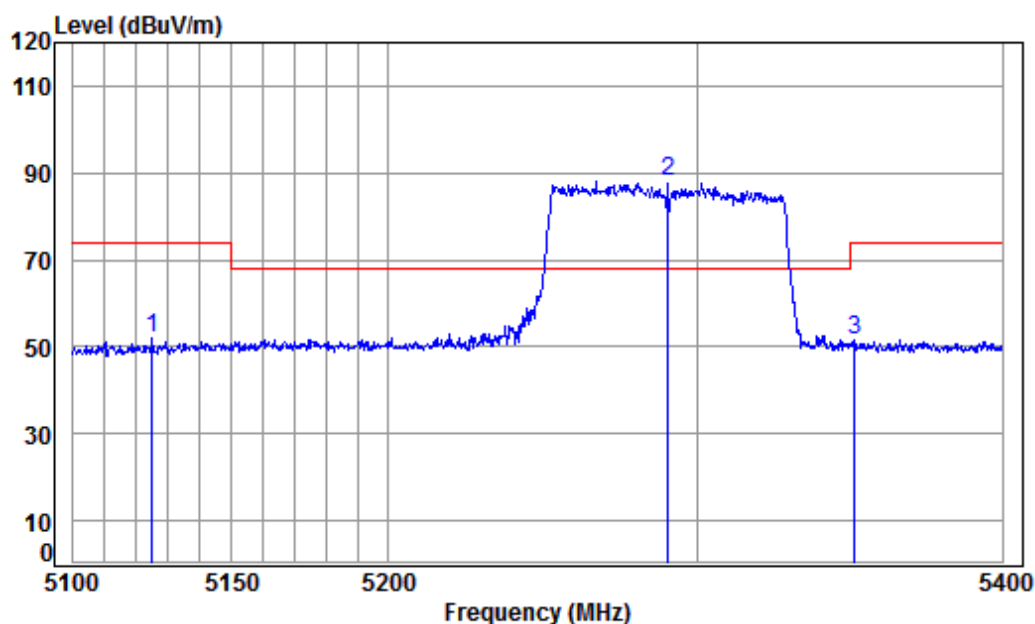

Condition: 3m HORIZONTAL

Job No : 0217RG

Mode : 5290 Band edge

: Ant 1 5G WIFI 11AC(80) CH58

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Limit Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	5124.838	8.29	34.47	38.19	47.45	52.02	74.00	-21.98	peak
2 pp	5290.000	8.54	34.44	38.17	83.04	87.85	68.20	19.65	peak
3	5351.146	8.63	34.43	38.16	46.79	51.69	74.00	-22.31	peak




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM180200138802

Page: 516 of 817

Test mode:	802.11ac(HT80)	Frequency(MHz):	5290	Average	Horizontal
------------	----------------	-----------------	------	---------	------------

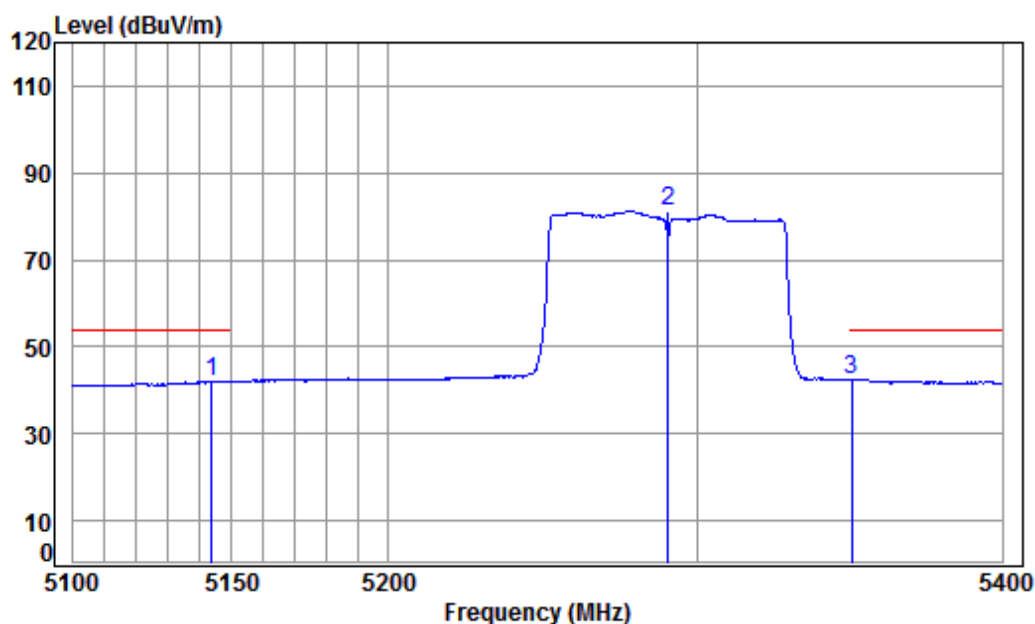

Condition: 3m HORIZONTAL

Job No : 0217RG

Mode : 5290 Band edge

: Ant 1 5G WIFI 11AC(80) CH58

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Limit Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	5143.620	8.32	34.47	38.18	37.51	42.12	54.00	-11.88	Average
2	5290.000	8.54	34.44	38.17	76.33	81.14	-----	-----	Average
3 pp	5350.229	8.63	34.43	38.16	37.59	42.49	54.00	-11.51	Average




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM180200138802

Page: 517 of 817

Test mode:	802.11ac(HT80)	Frequency(MHz):	5530	Peak	Vertical
------------	----------------	-----------------	------	------	----------

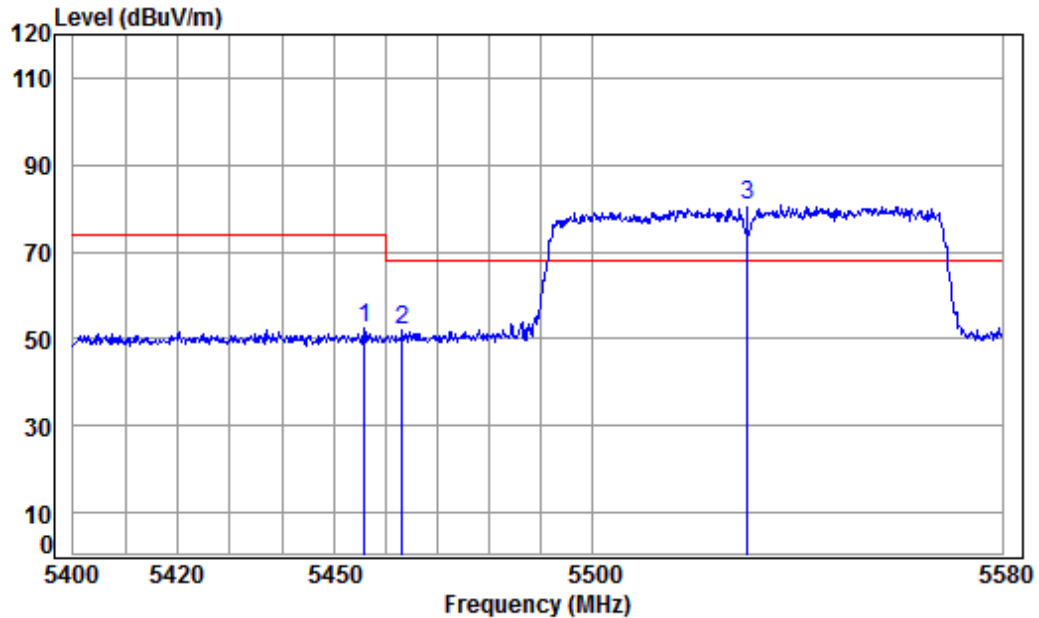

Condition: 3m VERTICAL

Job No : 0217RG

Mode : 5530 Band edge

: Ant 1 5G WIFI 11AC(80) CH106

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	5455.886	8.79	34.41	38.15	47.46	52.51	74.00	-21.49	Peak
2	5463.046	8.80	34.41	38.15	46.79	51.85	68.20	-16.35	peak
3 pp	5530.000	8.96	34.42	38.14	75.36	80.60	68.20	12.40	Peak




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM180200138802

Page: 518 of 817

Test mode:	802.11ac(HT80)	Frequency(MHz):	5530	Average	Vertical
------------	----------------	-----------------	------	---------	----------

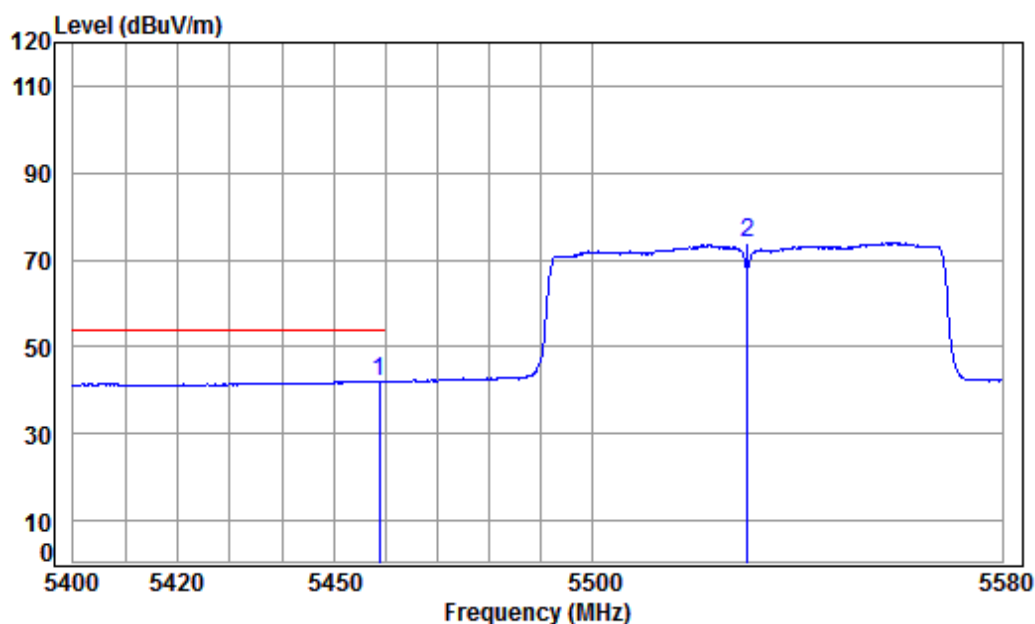

Condition: 3m VERTICAL

Job No : 0217RG

Mode : 5530 Band edge

: Ant 1 5G WIFI 11AC(80) CH106

		Cable	Ant	Preamp	Read	Limit	Over	
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1 pp	5458.749	8.79	34.41	38.15	37.03	42.08	54.00	-11.92 Average
2	5530.000	8.96	34.42	38.14	68.68	73.92	-----	----- Average




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM180200138802

Page: 519 of 817

Test mode:	802.11ac(HT80)	Frequency(MHz):	5530	Peak	Horizontal
------------	----------------	-----------------	------	------	------------

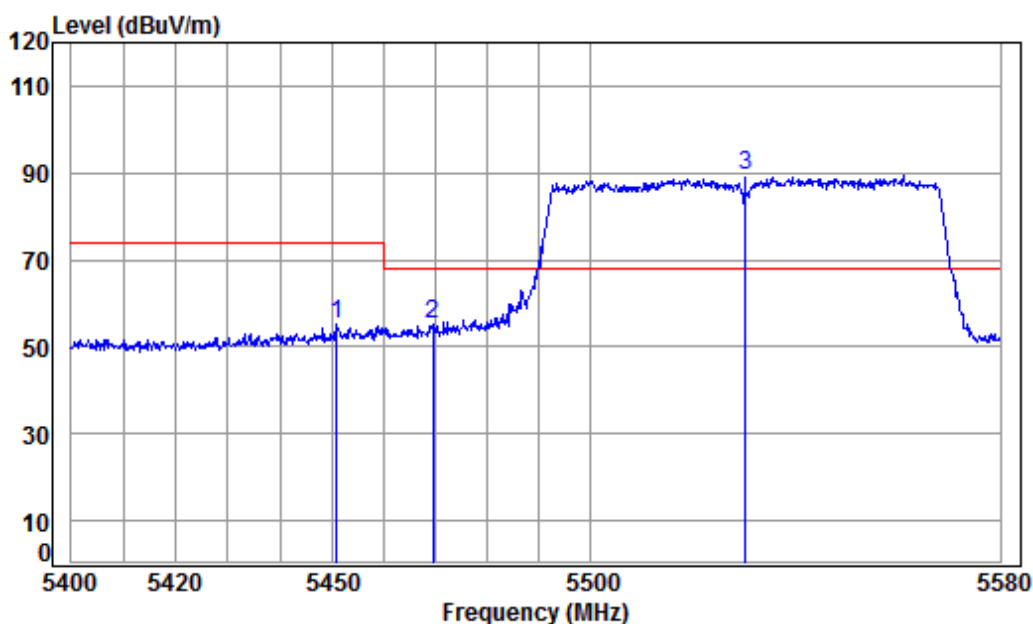

Condition: 3m HORIZONTAL

Job No : 0217RG

Mode : 5530 Band edge

: Ant 1 5G WIFI 11AC(80) CH106

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	5450.879	8.78	34.41	38.15	50.01	55.05	74.00	-18.95	peak
2	5469.319	8.81	34.41	38.15	50.23	55.30	68.20	-12.90	peak
3 pp	5530.000	8.96	34.42	38.14	84.36	89.60	68.20	21.40	peak




SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch

Report No.: SZEM180200138802

Page: 520 of 817

Test mode:	802.11ac(HT80)	Frequency(MHz):	5530	Average	Horizontal
------------	----------------	-----------------	------	---------	------------

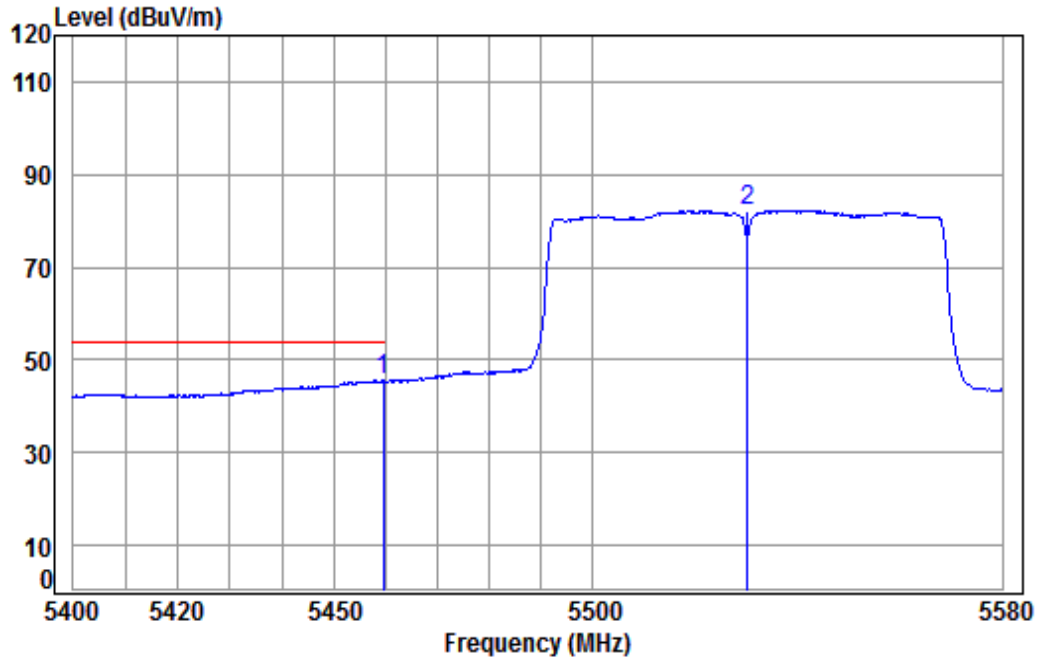

Condition: 3m HORIZONTAL

Job No : 0217RG

Mode : 5530 Band edge

: Ant 1 5G WIFI 11AC(80) CH106

		Cable	Ant	Preamp	Read	Limit	Over	
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1 pp	5459.465	8.79	34.41	38.15	40.45	45.50	54.00	-8.50 Average
2	5530.000	8.96	34.42	38.14	77.09	82.33	-----	----- Average




SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch

Report No.: SZEM180200138802

Page: 521 of 817

Test mode:	802.11ac(HT80)	Frequency(MHz):	5610	Peak	Vertical
------------	----------------	-----------------	------	------	----------

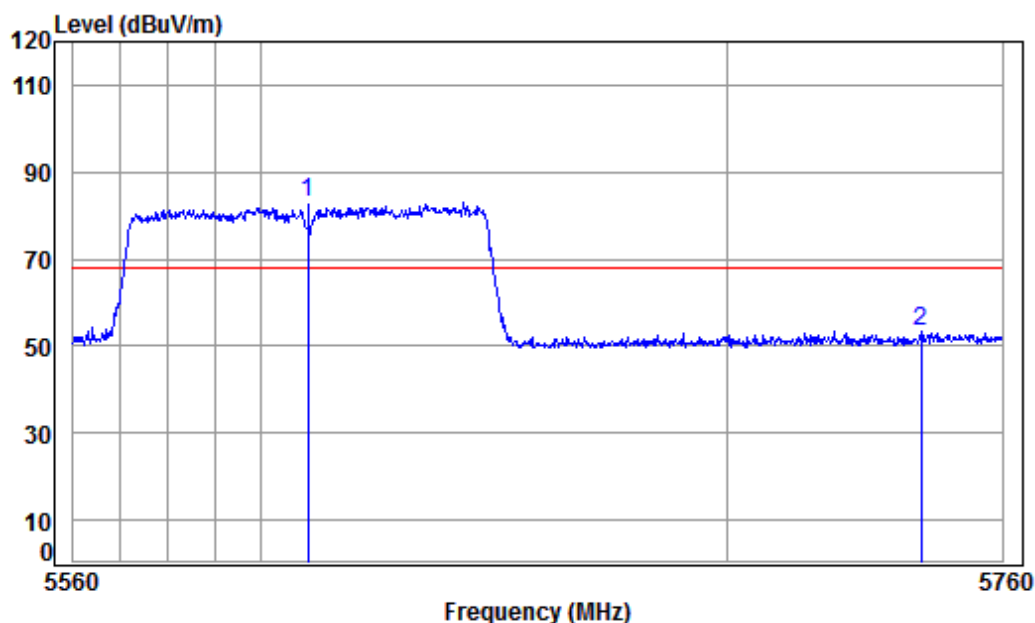

Condition: 3m VERTICAL

Job No : 0217RG

Mode : 5610 Band edge

: Ant 1 5G WIFI 11AC(80) CH122

		Cable	Ant	Preamp	Read		Limit	Over	
Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark	
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB		
1 pp 5610.000	9.24	34.47	38.14	77.36	82.93	68.20	14.73	Peak	
2 5742.318	9.70	34.55	38.12	47.41	53.54	68.20	-14.66	Peak	




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM180200138802

Page: 522 of 817

Test mode:	802.11ac(HT80)	Frequency(MHz):	5610	Peak	Horizontal
------------	----------------	-----------------	------	------	------------

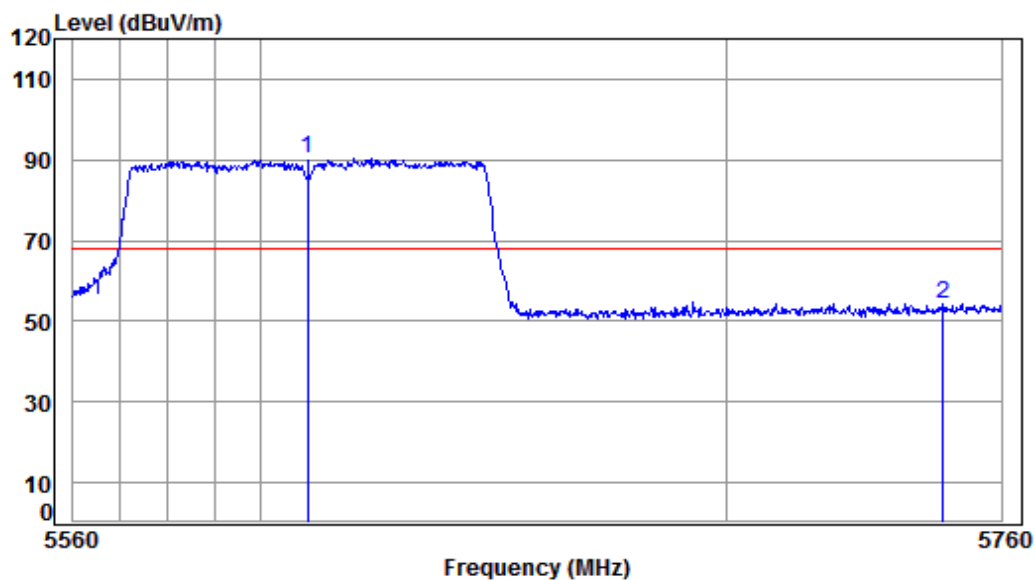

Condition: 3m HORIZONTAL

Job No : 0217RG

Mode : 5610 Band edge

: Ant 1 5G WIFI 11AC(80) CH122

		Cable	Ant	Preamp	Read	Limit	Over	
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1	pp 5610.000	9.24	34.47	38.14	84.57	90.14	68.20	21.94 peak
2	5747.190	9.72	34.55	38.12	48.35	54.50	68.20	-13.70 peak




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM180200138802

Page: 523 of 817

Test mode:	802.11ac(HT80)	Frequency(MHz):	5775	Peak	Vertical
------------	----------------	-----------------	------	------	----------

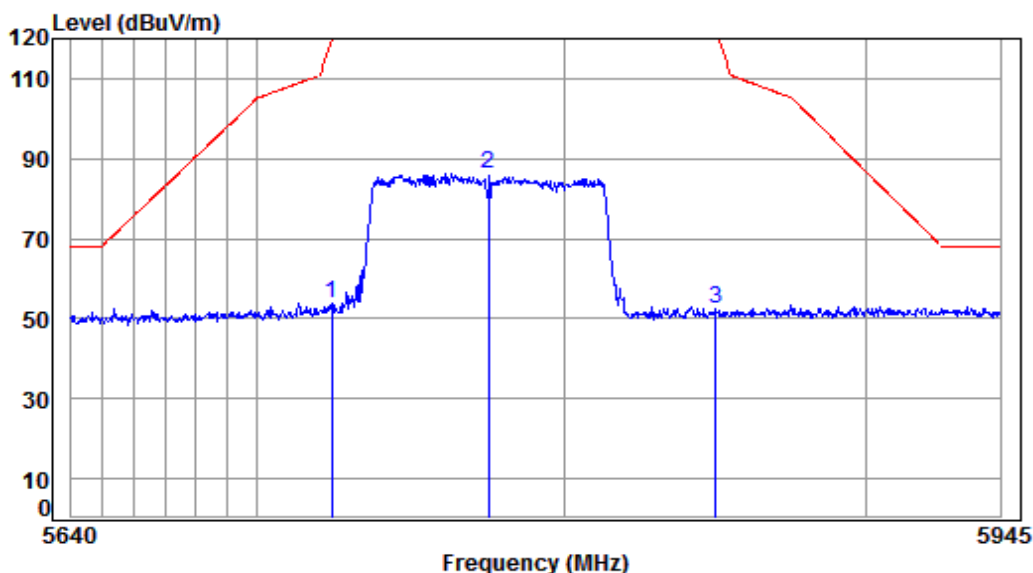

Condition: 3m VERTICAL

Job No : 0217RG

Mode : 5775 Band edge

: Ant 1 5G WIFI 11AC(80) CH155

		Cable	Ant	Preamp	Read	Limit	Over	
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1	5724.088	9.64	34.54	38.13	47.65	53.70	120.12	-66.42 peak
2 pp	5775.000	9.81	34.57	38.12	80.04	86.30	125.20	-38.90 peak
3	5849.958	10.07	34.61	38.11	45.84	52.41	125.20	-72.79 peak




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM180200138802

Page: 524 of 817

Test mode:	802.11ac(HT80)	Frequency(MHz):	5775	Peak	Horizontal
------------	----------------	-----------------	------	------	------------

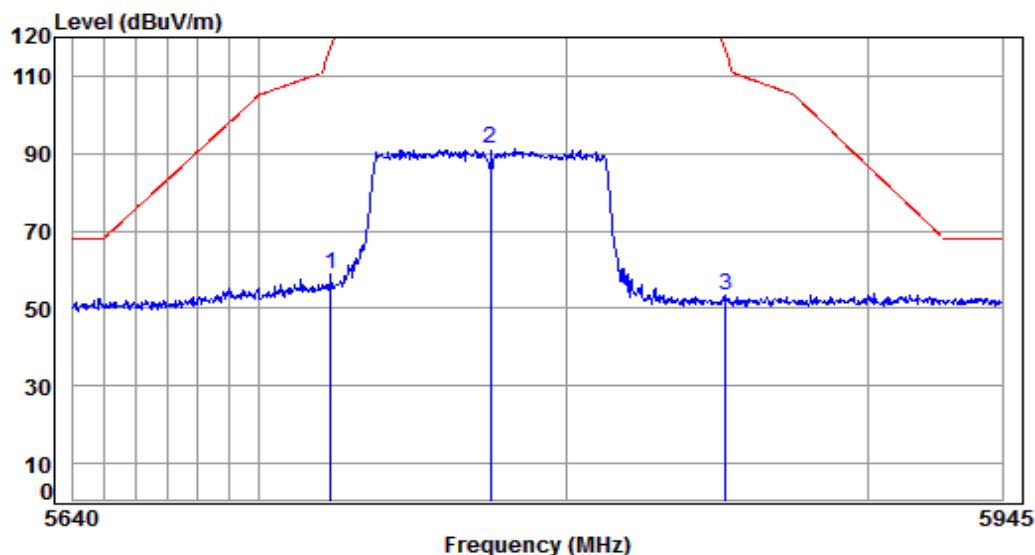

Condition: 3m HORIZONTAL

Job No : 0217RG

Mode : 5775 Band edge

: Ant 1 5G WIFI 11AC(80) CH155

		Cable	Ant	Preamp	Read	Limit	Over	
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1	5722.883	9.64	34.54	38.13	52.68	58.73	117.37	-58.64 peak
2 pp	5775.000	9.81	34.57	38.12	85.01	91.27	125.20	-33.93 peak
3	5852.424	10.08	34.61	38.11	46.69	53.27	116.67	-63.40 peak



SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch


Report No.: SZEM180200138802

Page: 525 of 817

ANT2

Test plot as follows:

Test mode:	802.11a	Frequency(MHz):	5180	Peak	Vertical
------------	---------	-----------------	------	------	----------

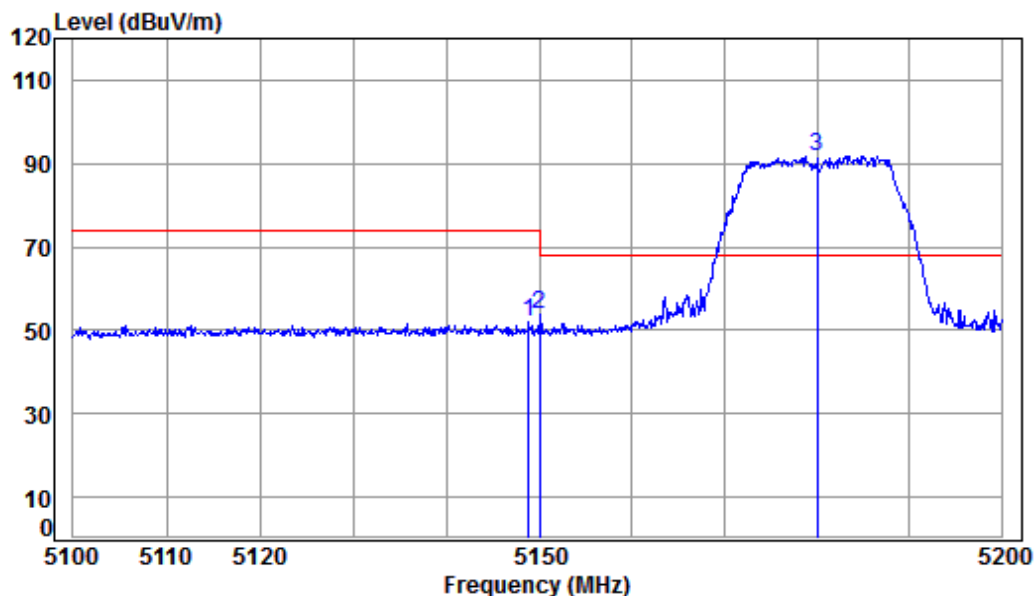

Condition: 3m VERTICAL

Job No : 0217RG

Mode : 5180 Band edge

: Ant 2 5G WIFI 11A CH36

		Cable	Ant	Preamp	Read		Limit	Over	
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	5148.857	8.32	34.47	38.18	47.19	51.80	74.00	-22.20	Peak
2	5149.980	8.33	34.47	38.18	49.04	53.66	74.00	-20.34	Peak
3	pp 5180.000	8.37	34.46	38.18	87.11	91.76	68.20	23.56	Peak




SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch

Report No.: SZEM180200138802

Page: 526 of 817

Test mode:	802.11a	Frequency(MHz):	5180	Average	Vertical
------------	---------	-----------------	------	---------	----------

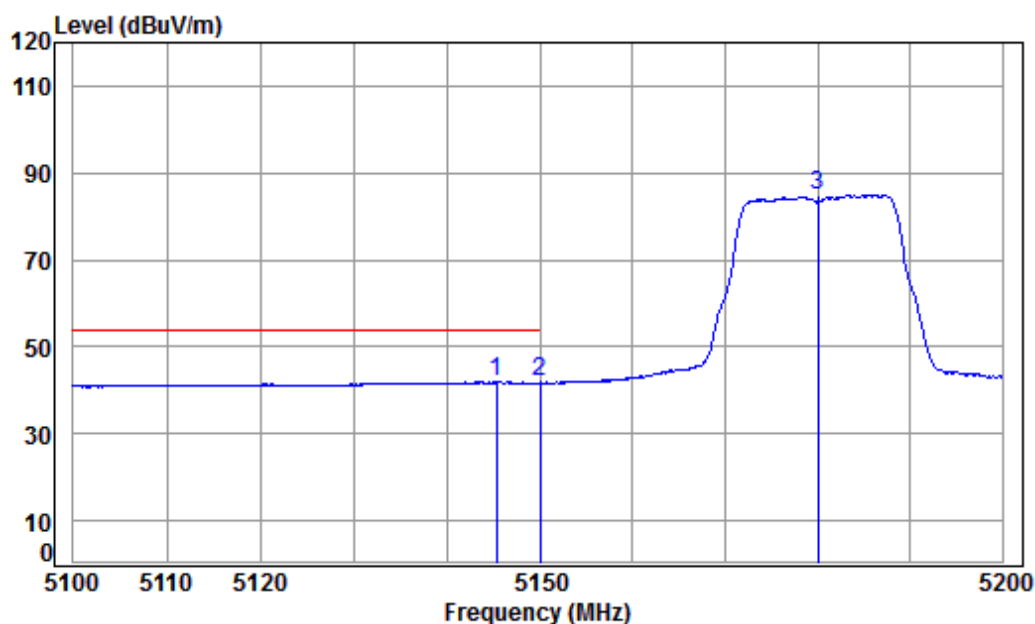

Condition: 3m VERTICAL

Job No : 0217RG

Mode : 5180 Band edge

: Ant 2 5G WIFI 11A CH36

		Cable	Ant	Preamp	Read	Limit	Over	
Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1 pp 5145.359	8.32	34.47	38.18	37.26	41.87	54.00	-12.13	Average
2 5149.980	8.33	34.47	38.18	37.15	41.77	54.00	-12.23	Average
3 5180.000	8.37	34.46	38.18	80.40	85.05	-----	-----	Average




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM180200138802

Page: 527 of 817

Test mode:	802.11a	Frequency(MHz):	5180	Peak	Horizontal
------------	---------	-----------------	------	------	------------

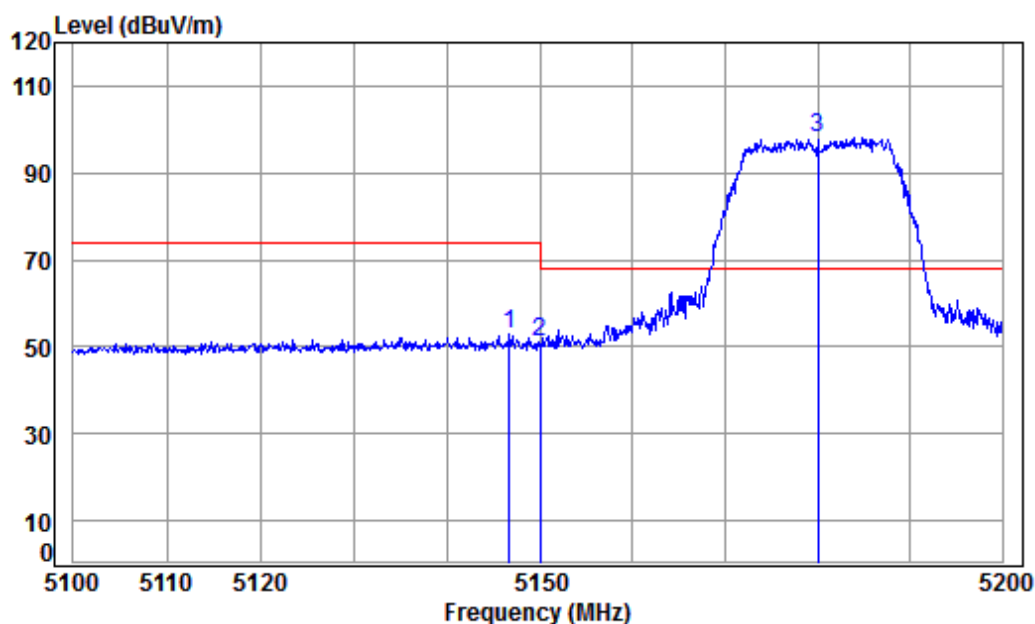

Condition: 3m HORIZONTAL

Job No : 0217RG

Mode : 5180 Band edge

: Ant 2 5G WIFI 11A CH36

	Freq	Cable Loss	Ant Factor	Preamplifier Factor	Read Level	Limit Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	5146.758	8.32	34.47	38.18	48.24	52.85	74.00	-21.15	peak
2	5149.980	8.33	34.47	38.18	46.61	51.23	74.00	-22.77	peak
3 pp	5180.000	8.37	34.46	38.18	93.43	98.08	68.20	29.88	peak




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM180200138802

Page: 528 of 817

Test mode:	802.11a	Frequency(MHz):	5180	Average	Horizontal
------------	---------	-----------------	------	---------	------------

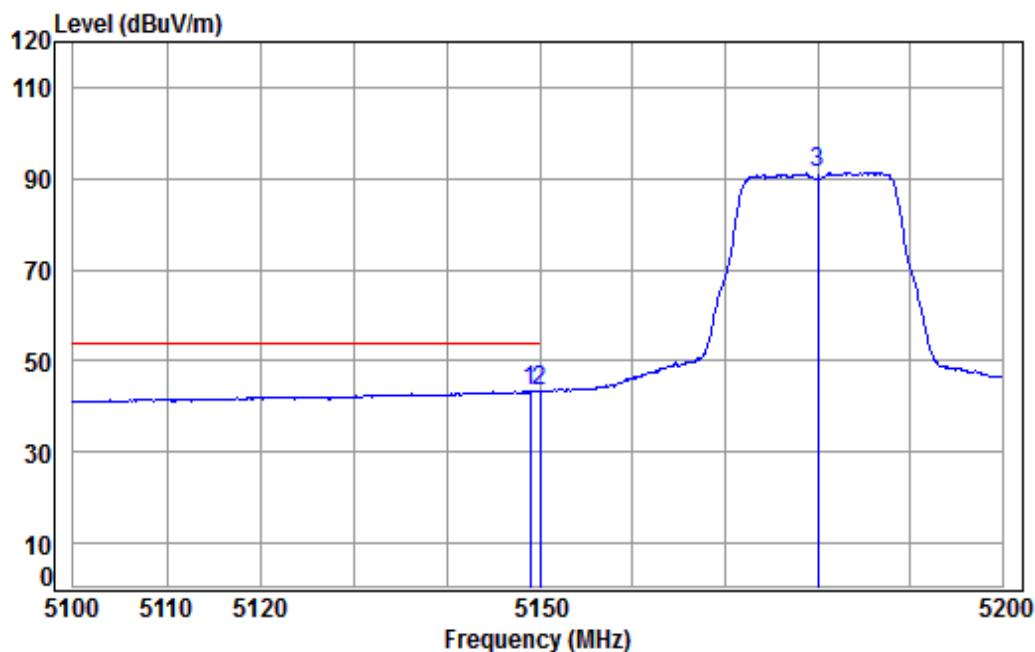

Condition: 3m HORIZONTAL

Job No : 0217RG

Mode : 5180 Band edge

: Ant 2 5G WIFI 11A CH36

		Cable	Ant	Preamp	Read		Limit	Over	
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	5148.958	8.32	34.47	38.18	38.78	43.39	54.00	-10.61	Average
2 pp	5149.980	8.33	34.47	38.18	38.82	43.44	54.00	-10.56	Average
3	5180.000	8.37	34.46	38.18	86.71	91.36	-----	-----	Average




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM180200138802

Page: 529 of 817

Test mode:	802.11a	Frequency(MHz):	5240	Peak	Vertical
------------	---------	-----------------	------	------	----------

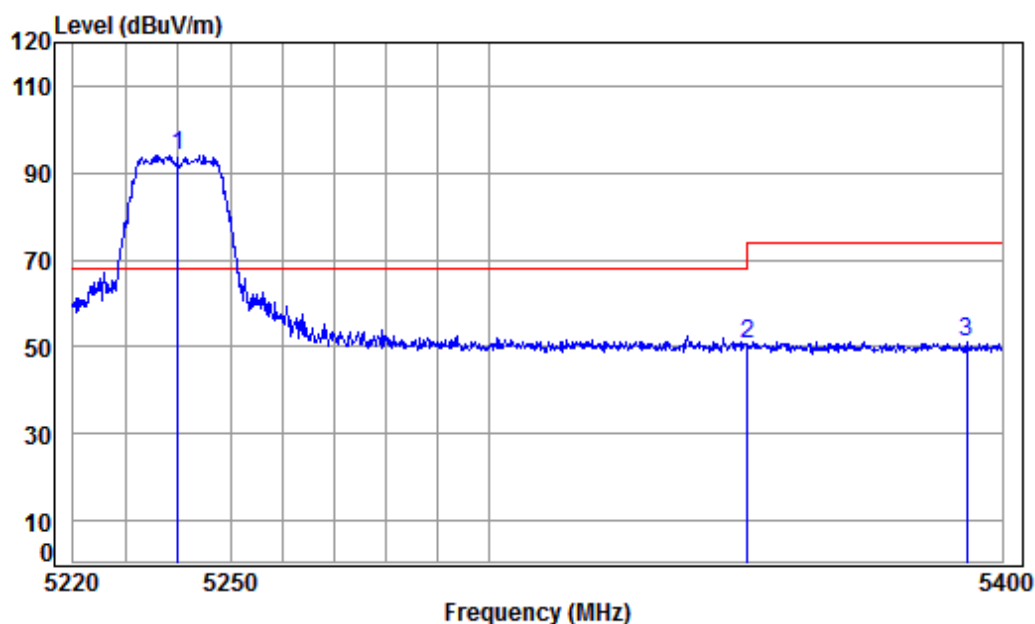

Condition: 3m VERTICAL

Job No : 0217RG

Mode : 5240 Band edge

: Ant 2 5G WIFI 11A CH48

	Freq	Cable Loss	Ant Factor	Preamplifier Factor	Read Level	Limit Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1 pp	5240.000	8.46	34.45	38.17	89.47	94.21	68.20	26.01	Peak
2	5350.020	8.63	34.43	38.16	45.63	50.53	74.00	-23.47	Peak
3	5393.048	8.69	34.42	38.16	46.35	51.30	74.00	-22.70	Peak




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM180200138802

Page: 530 of 817

Test mode:	802.11a	Frequency(MHz):	5240	Average	Vertical
------------	---------	-----------------	------	---------	----------

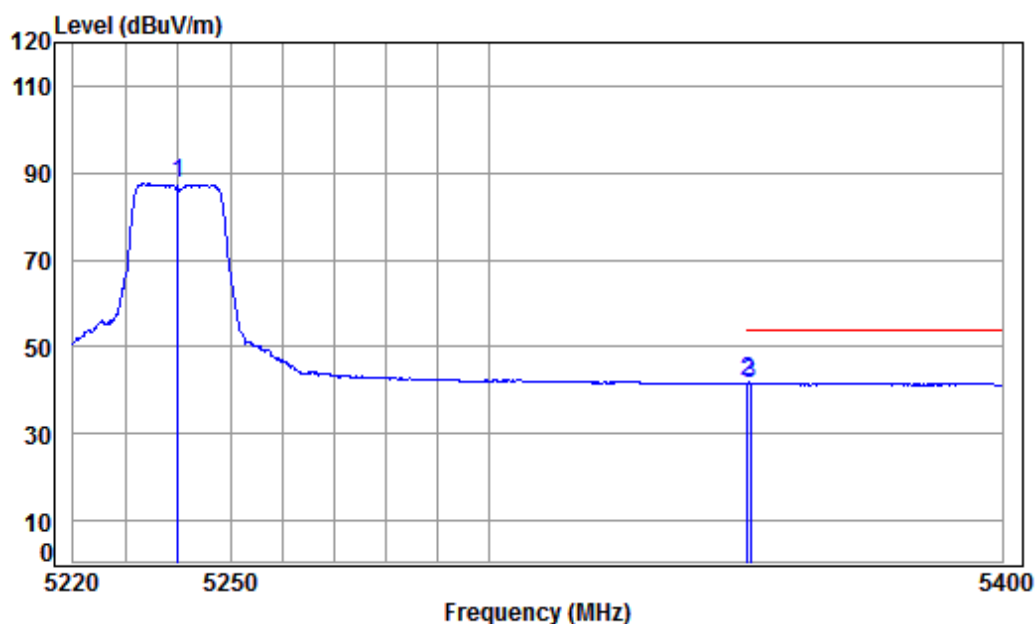

Condition: 3m VERTICAL

Job No : 0217RG

Mode : 5240 Band edge

: Ant 2 5G WIFI 11A CH48

		Cable	Ant	Preamp	Read	Limit	Over	
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1	5240.000	8.46	34.45	38.17	82.67	87.41	-----	----- Average
2	pp 5350.020	8.63	34.43	38.16	36.86	41.76	54.00	-12.24 Average
3	5350.616	8.63	34.43	38.16	36.85	41.75	54.00	-12.25 Average




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM180200138802

Page: 531 of 817

Test mode:	802.11a	Frequency(MHz):	5240	Peak	Horizontal
------------	---------	-----------------	------	------	------------

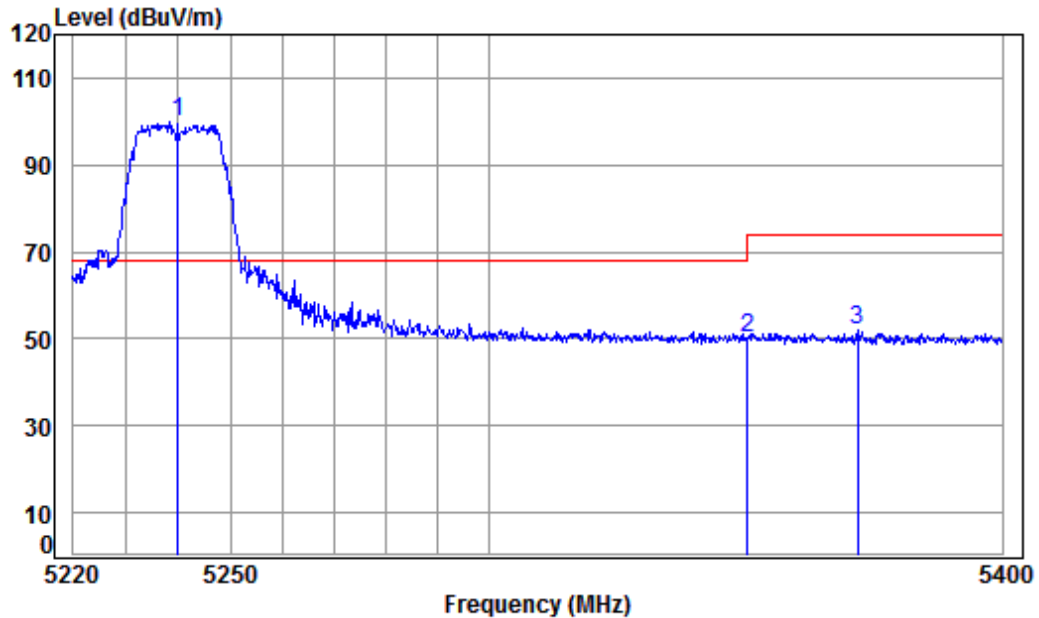

Condition: 3m HORIZONTAL

Job No : 0217RG

Mode : 5240 Band edge

: Ant 2 5G WIFI 11A CH48

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1 pp	5240.000	8.46	34.45	38.17	94.99	99.73	68.20	31.53	peak
2	5350.020	8.63	34.43	38.16	45.18	50.08	74.00	-23.92	peak
3	5371.517	8.66	34.42	38.16	47.16	52.08	74.00	-21.92	peak




SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch

Report No.: SZEM180200138802

Page: 532 of 817

Test mode:	802.11a	Frequency(MHz):	5240	Average	Horizontal
------------	---------	-----------------	------	---------	------------

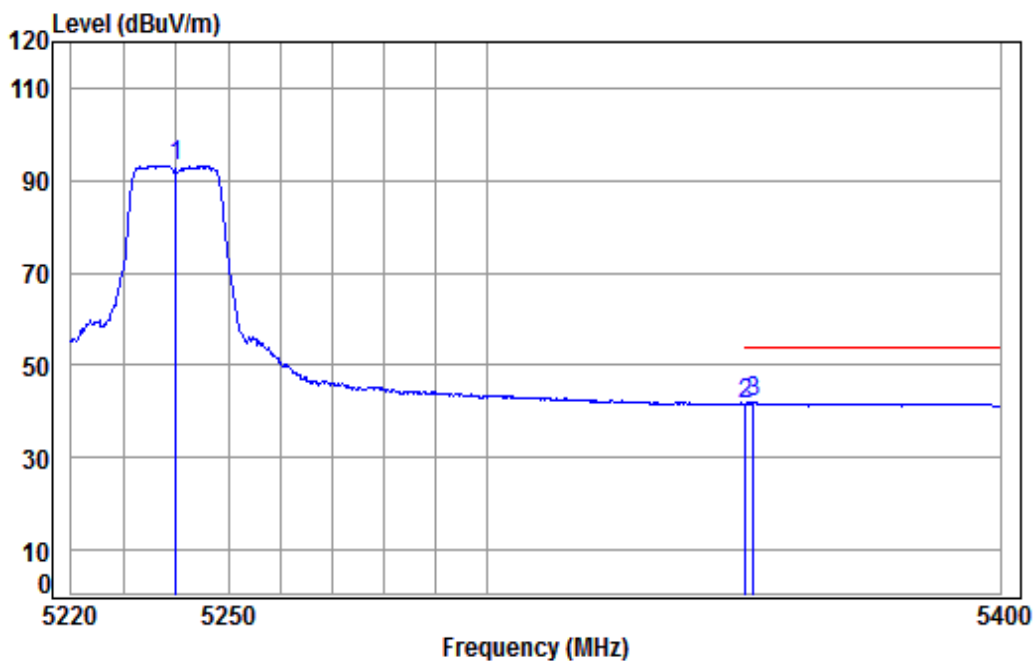

Condition: 3m HORIZONTAL

Job No : 0217RG

Mode : 5240 Band edge

: Ant 2 5G WIFI 11A CH48

		Cable	Ant	Preamp	Read		Limit	Over	
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	5240.000	8.46	34.45	38.17	88.49	93.23	-----	-----	Average
2	5350.020	8.63	34.43	38.16	36.80	41.70	54.00	-12.30	Average
3 pp	5351.523	8.63	34.43	38.16	36.92	41.82	54.00	-12.18	Average




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM180200138802

Page: 533 of 817

Test mode:	802.11a	Frequency(MHz):	5260	Peak	Vertical
------------	---------	-----------------	------	------	----------

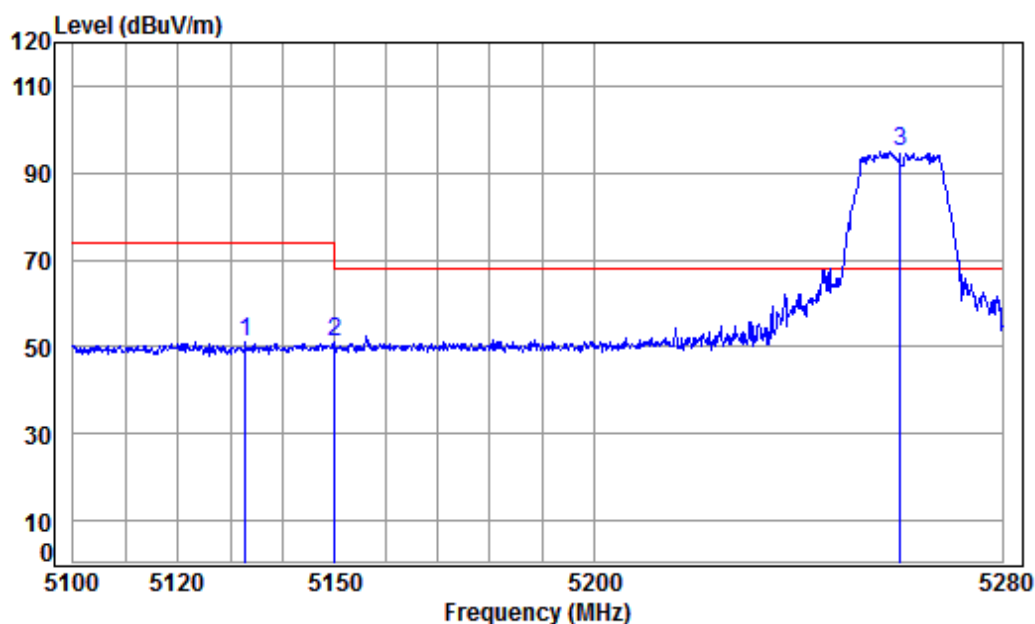

Condition: 3m VERTICAL

Job No : 0217RG

Mode : 5260 Band edge

: Ant 2 5G WIFI 11A CH52

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Limit Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	5133.009	8.30	34.47	38.19	46.62	51.20	74.00	-22.80	Peak
2	5149.980	8.33	34.47	38.18	46.64	51.26	74.00	-22.74	Peak
3 pp	5260.000	8.49	34.45	38.17	90.00	94.77	68.20	26.57	Peak




SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch

Report No.: SZEM180200138802

Page: 534 of 817

Test mode:	802.11a	Frequency(MHz):	5260	Average	Vertical
------------	---------	-----------------	------	---------	----------

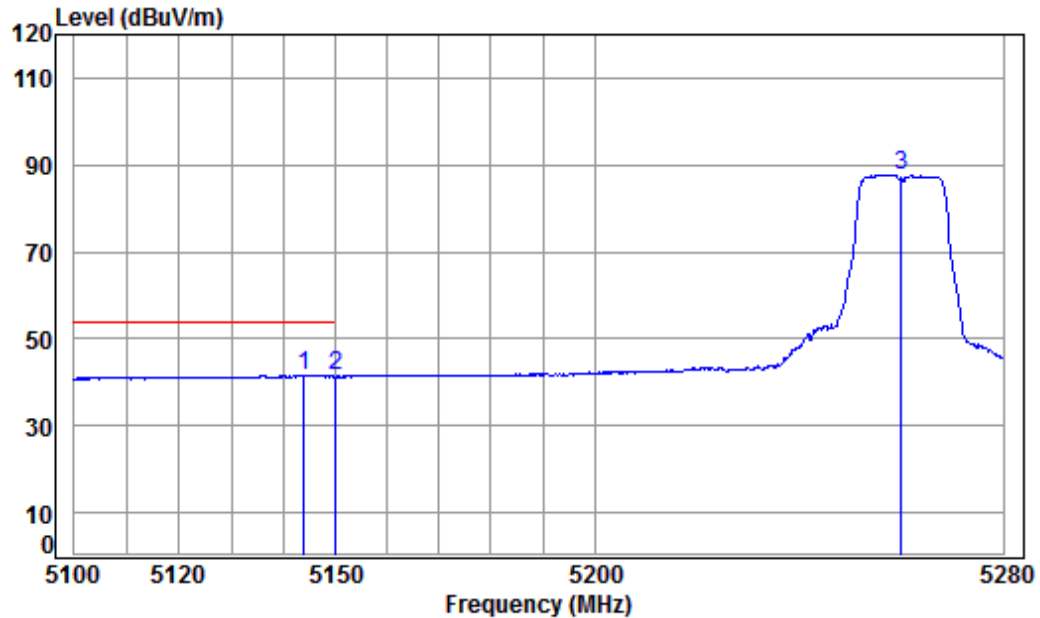

Condition: 3m VERTICAL

Job No : 0217RG

Mode : 5260 Band edge

: Ant 2 5G WIFI 11A CH52

		Cable	Ant	Preamp	Read	Limit	Over	
Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1 pp 5143.881	8.32	34.47	38.18	36.88	41.49	54.00	-12.51	Average
2 5149.980	8.33	34.47	38.18	36.71	41.33	54.00	-12.67	Average
3 5260.000	8.49	34.45	38.17	83.02	87.79	-----	-----	Average




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM180200138802

Page: 535 of 817

Test mode:	802.11a	Frequency(MHz):	5260	Peak	Horizontal
------------	---------	-----------------	------	------	------------

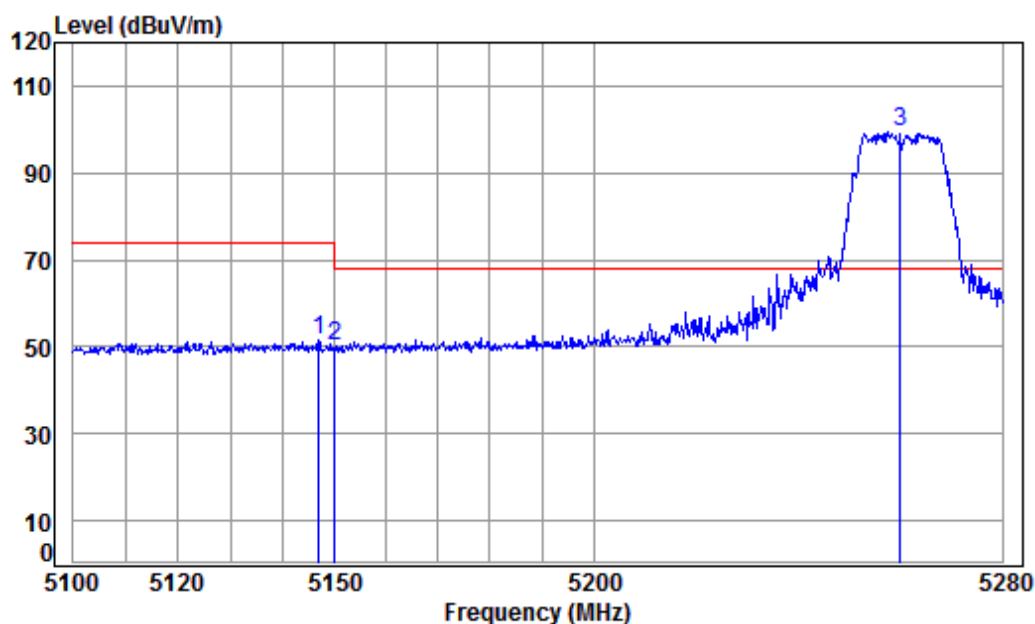

Condition: 3m HORIZONTAL

Job No : 0217RG

Mode : 5260 Band edge

: Ant 2 5G WIFI 11A CH52

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Limit Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	5147.094	8.32	34.47	38.18	47.08	51.69	74.00	-22.31	peak
2	5149.980	8.33	34.47	38.18	45.34	49.96	74.00	-24.04	peak
3 pp	5260.000	8.49	34.45	38.17	94.55	99.32	68.20	31.12	peak




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM180200138802

Page: 536 of 817

Test mode:	802.11a	Frequency(MHz):	5260	Average	Horizontal
------------	---------	-----------------	------	---------	------------

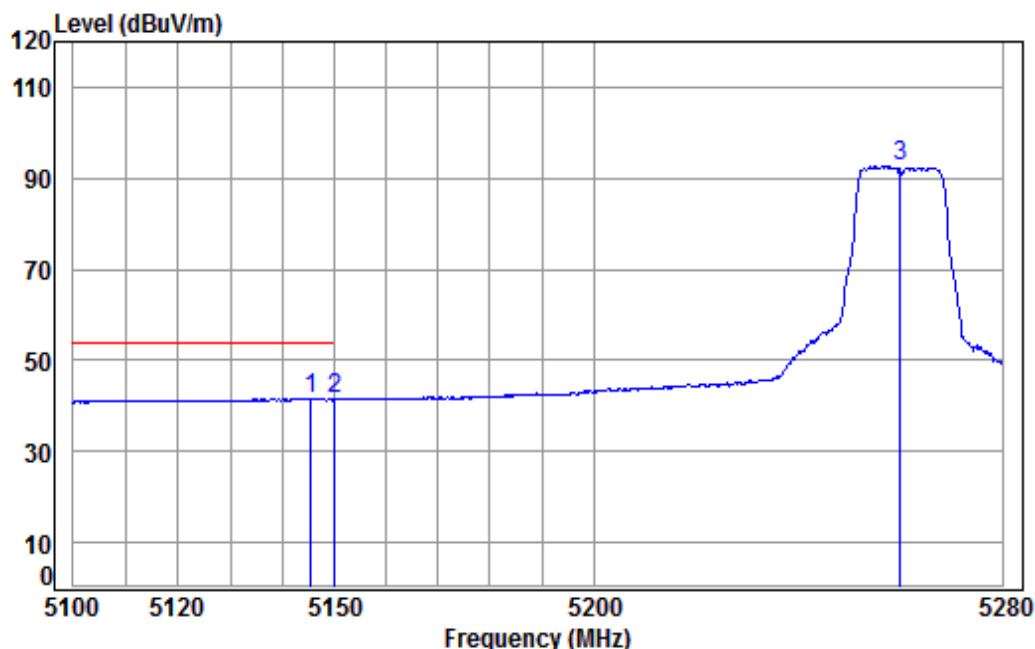

Condition: 3m HORIZONTAL

Job No : 0217RG

Mode : 5260 Band edge

: Ant 2 5G WIFI 11A CH52

		Cable	Ant	Preamp	Read		Limit	Over	
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1 pp	5145.487	8.32	34.47	38.18	36.94	41.55	54.00	-12.45	Average
2	5149.980	8.33	34.47	38.18	36.75	41.37	54.00	-12.63	Average
3	5260.000	8.49	34.45	38.17	87.76	92.53	-----	-----	Average




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM180200138802

Page: 537 of 817

Test mode:	802.11a	Frequency(MHz):	5320	Peak	Vertical
------------	---------	-----------------	------	------	----------

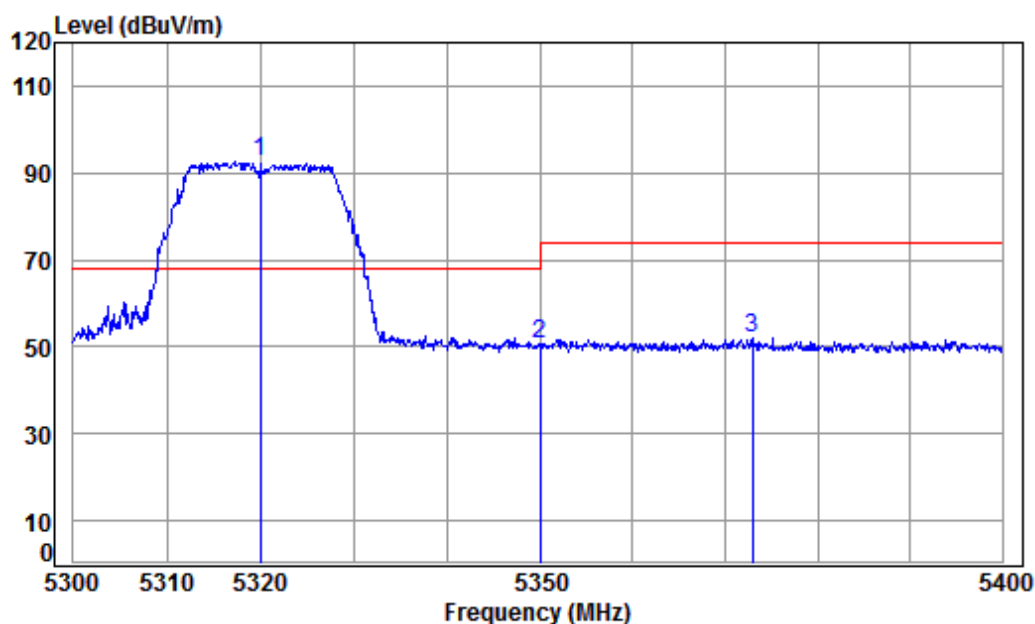

Condition: 3m VERTICAL

Job No : 0217RG

Mode : 5320 Band edge

: Ant 2 5G WIFI 11A CH64

		Cable	Ant	Preamp	Read	Limit	Over	
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1	pp 5320.000	8.58	34.43	38.17	87.58	92.42	68.20	24.22 Peak
2	5350.020	8.63	34.43	38.16	45.78	50.68	74.00	-23.32 Peak
3	5372.916	8.66	34.42	38.16	47.19	52.11	74.00	-21.89 Peak




SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch

Report No.: SZEM180200138802

Page: 538 of 817

Test mode:	802.11a	Frequency(MHz):	5320	Average	Vertical
------------	---------	-----------------	------	---------	----------

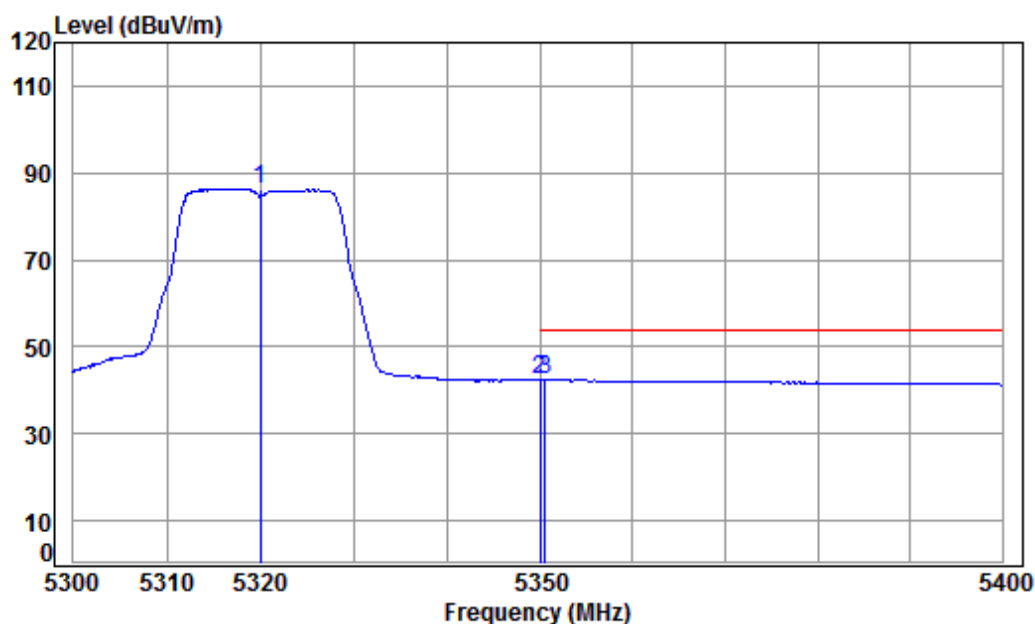

Condition: 3m VERTICAL

Job No : 0217RG

Mode : 5320 Band edge

: Ant 2 5G WIFI 11A CH64

	Freq	Cable Loss	Ant Factor	Preamplifier Factor	Read Level	Limit Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	5320.000	8.58	34.43	38.17	81.55	86.39	-----	-----	Average
2	pp 5350.020	8.63	34.43	38.16	37.64	42.54	54.00	-11.46	Average
3	5350.566	8.63	34.43	38.16	37.52	42.42	54.00	-11.58	Average




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM180200138802

Page: 539 of 817

Test mode:	802.11a	Frequency(MHz):	5320	Peak	Horizontal
------------	---------	-----------------	------	------	------------

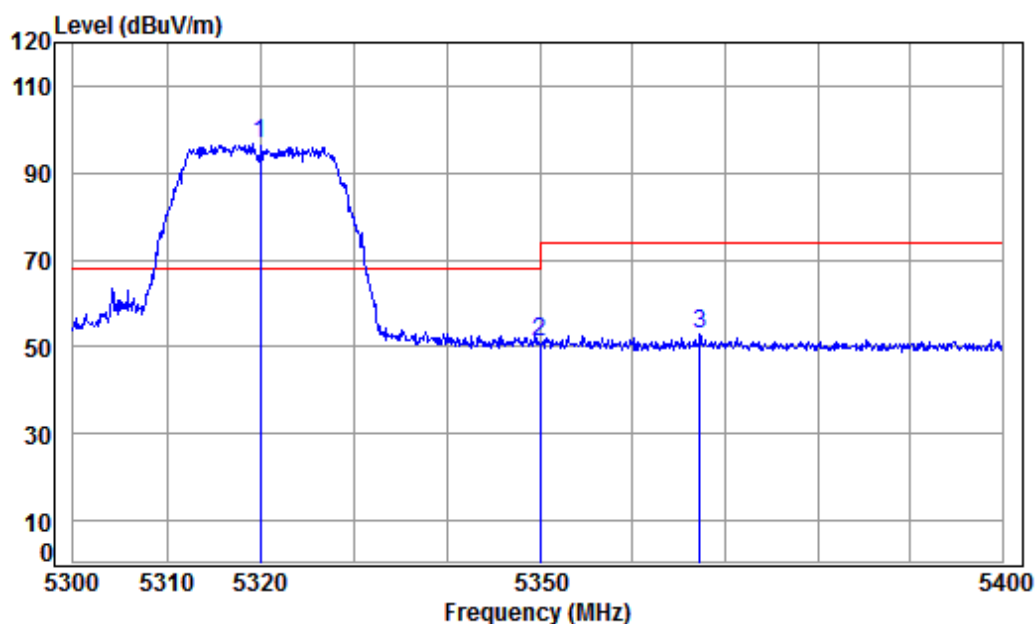

Condition: 3m HORIZONTAL

Job No : 0217RG

Mode : 5320 Band edge

: Ant 2 5G WIFI 11A CH64

		Cable	Ant	Preamp	Read		Limit	Over	
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	pp 5320.000	8.58	34.43	38.17	91.77	96.61	68.20	28.41	peak
2	5350.020	8.63	34.43	38.16	46.39	51.29	74.00	-22.71	peak
3	5367.295	8.66	34.43	38.16	47.88	52.81	74.00	-21.19	peak




SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch

Report No.: SZEM180200138802

Page: 540 of 817

Test mode:	802.11a	Frequency(MHz):	5320	Average	Horizontal
------------	---------	-----------------	------	---------	------------

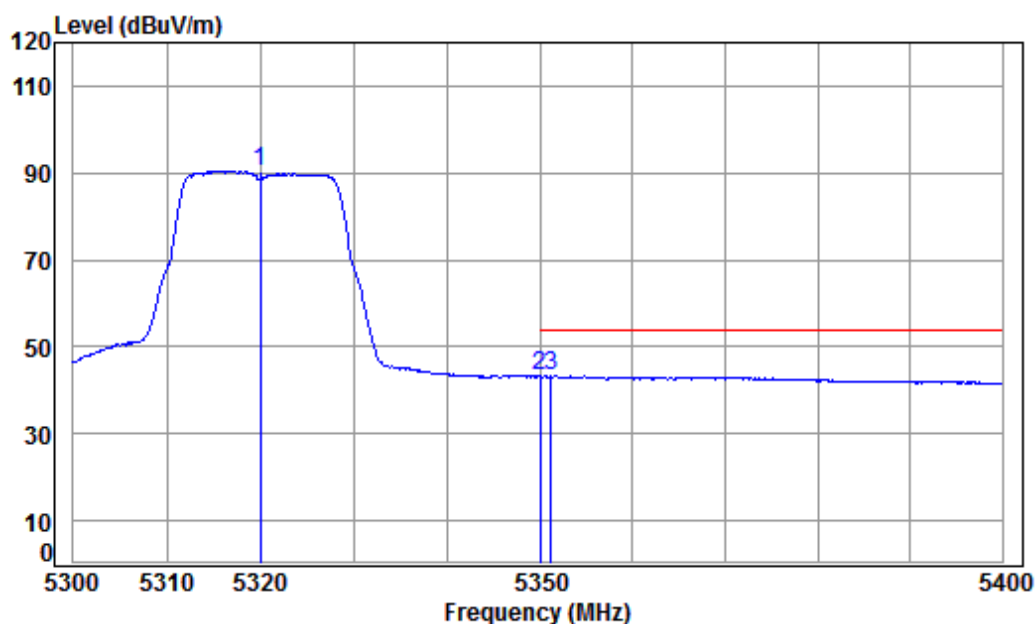

Condition: 3m HORIZONTAL

Job No : 0217RG

Mode : 5320 Band edge

: Ant 2 5G WIFI 11A CH64

	Freq	Cable Loss	Ant Factor	Preamplifier Factor	Read Level	Limit Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	5320.000	8.58	34.43	38.17	85.46	90.30	-----	-----	Average
2	5350.020	8.63	34.43	38.16	38.30	43.20	54.00	-10.80	Average
3 pp	5351.167	8.63	34.43	38.16	38.35	43.25	54.00	-10.75	Average




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM180200138802

Page: 541 of 817

Test mode:	802.11a	Frequency(MHz):	5500	Peak	Vertical
------------	---------	-----------------	------	------	----------

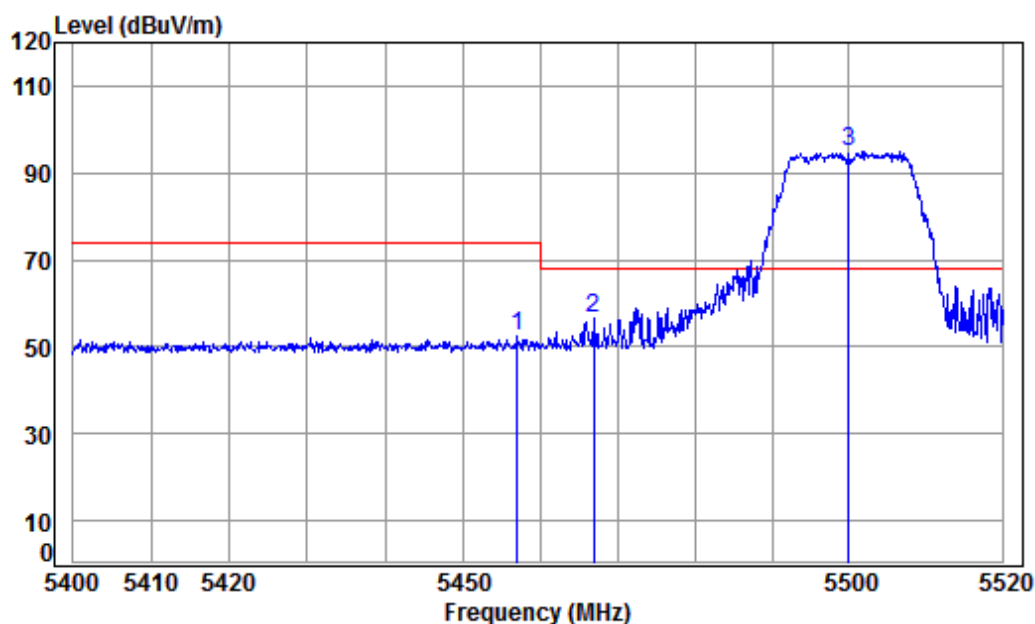

Condition: 3m VERTICAL

Job No : 0217RG

Mode : 5500 Band edge

: Ant 2 5G WIFI 11A CH100

	Freq	Cable Loss	Ant Factor	Preamplifier Factor	Read Level	Limit Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	5457.031	8.79	34.41	38.15	47.32	52.37	74.00	-21.63	Peak
2	5466.875	8.80	34.41	38.15	51.62	56.68	68.20	-11.52	peak
3 pp	5500.000	8.85	34.40	38.15	90.03	95.13	68.20	26.93	Peak




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM180200138802

Page: 542 of 817

Test mode:	802.11a	Frequency(MHz):	5500	Average	Vertical
------------	---------	-----------------	------	---------	----------

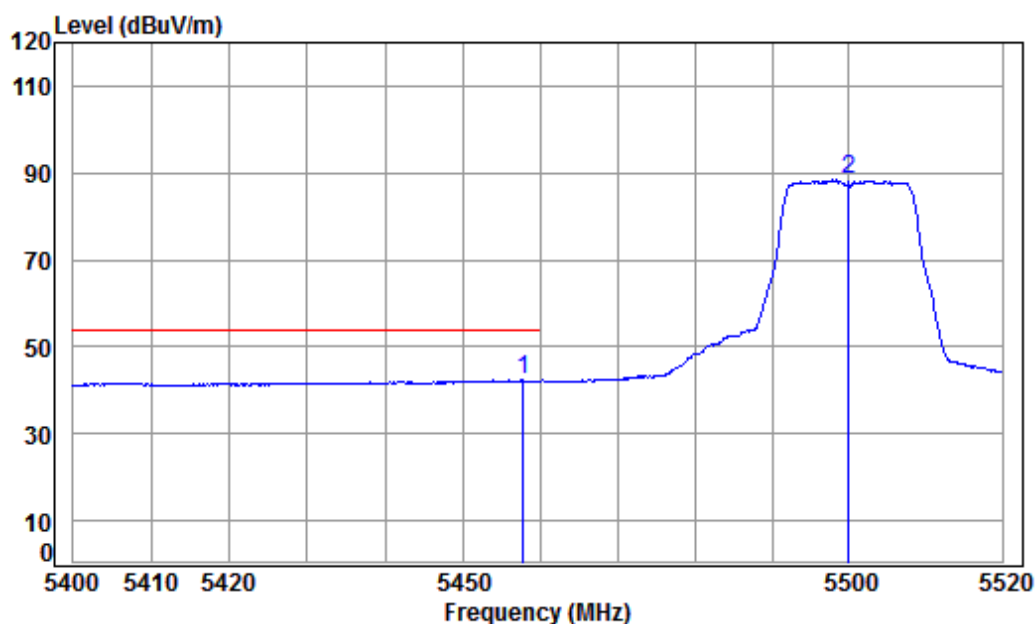

Condition: 3m VERTICAL

Job No : 0217RG

Mode : 5500 Band edge

: Ant 2 5G WIFI 11A CH100

		Cable	Ant	Preamp	Read	Limit	Over	
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1 pp	5457.871	8.79	34.41	38.15	37.25	42.30	54.00	-11.70 Average
2	5500.000	8.85	34.40	38.15	83.23	88.33	-----	----- Average




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM180200138802

Page: 543 of 817

Test mode:	802.11a	Frequency(MHz):	5500	Peak	Horizontal
------------	---------	-----------------	------	------	------------

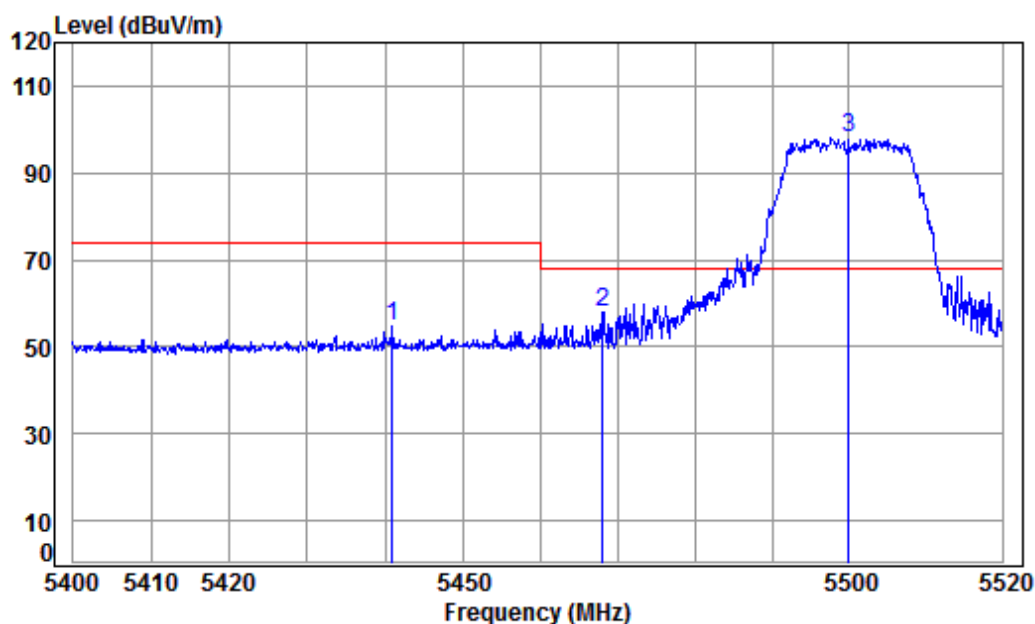

Condition: 3m HORIZONTAL

Job No : 0217RG

Mode : 5500 Band edge

: Ant 2 5G WIFI 11A CH100

	Freq	Cable Loss	Ant Factor	Preamplifier Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	5440.983	8.76	34.41	38.15	49.92	54.94	74.00	-19.06	peak
2	5468.077	8.80	34.41	38.15	53.09	58.15	68.20	-10.05	peak
3 pp	5500.000	8.85	34.40	38.15	92.83	97.93	68.20	29.73	peak




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM180200138802

Page: 544 of 817

Test mode:	802.11a	Frequency(MHz):	5500	Average	Horizontal
------------	---------	-----------------	------	---------	------------

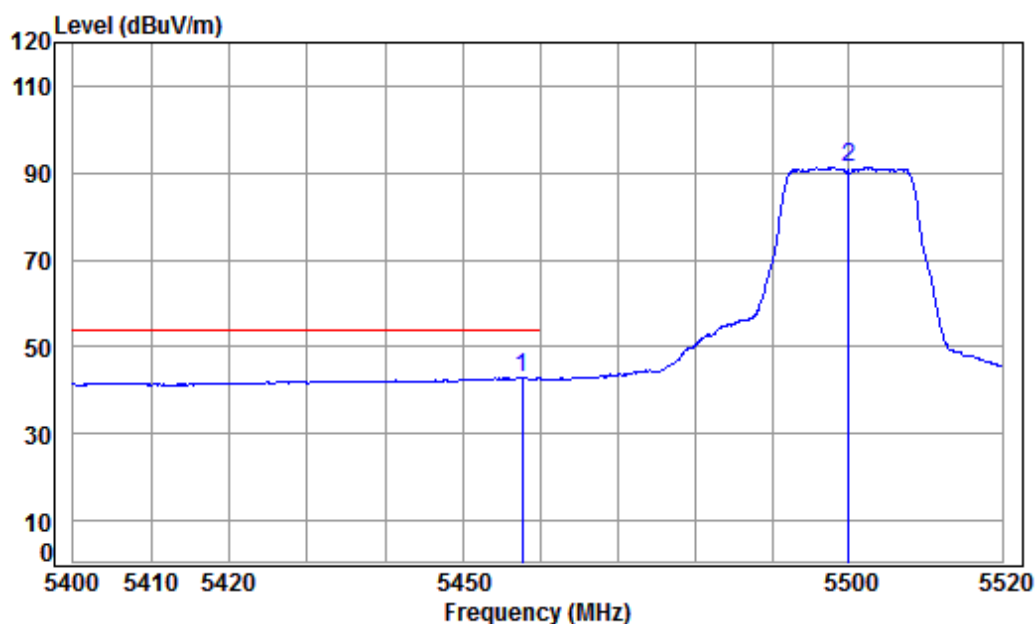

Condition: 3m HORIZONTAL

Job No : 0217RG

Mode : 5500 Band edge

: Ant 2 5G WIFI 11A CH100

		Cable	Ant	Preamp	Read	Limit	Over	
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1	pp 5457.631	8.79	34.41	38.15	37.75	42.80	54.00	-11.20 Average
2	5500.000	8.85	34.40	38.15	86.24	91.34	-----	----- Average




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM180200138802

Page: 545 of 817

Test mode:	802.11a	Frequency(MHz):	5700	Peak	Vertical
------------	---------	-----------------	------	------	----------

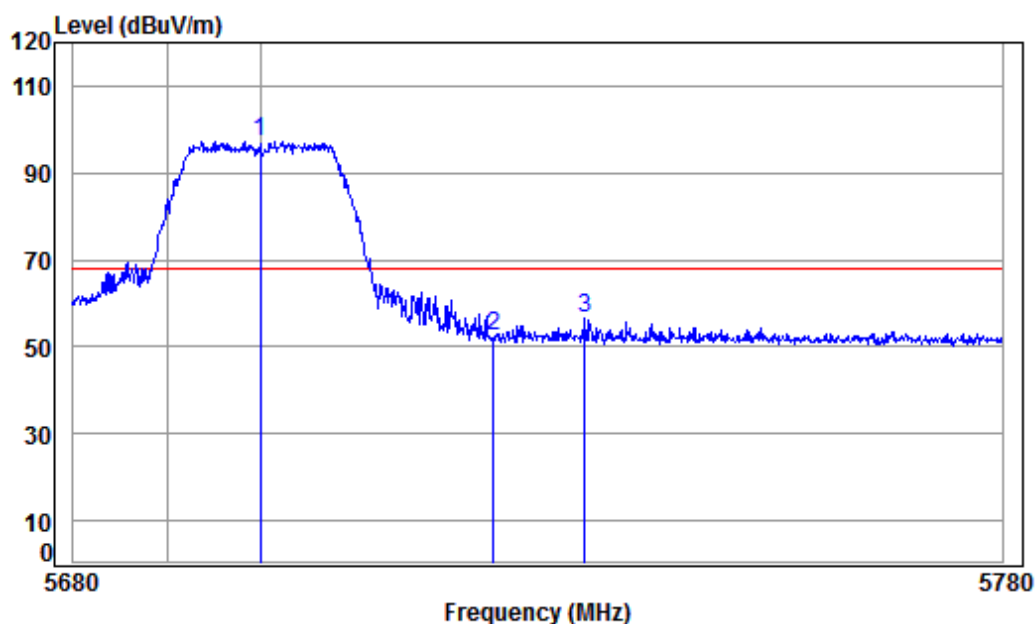

Condition: 3m VERTICAL

Job No : 0217RG

Mode : 5700 Band edge

: Ant 2 5G WIFI 11A CH140

		Cable	Ant	Preamp	Read	Limit	Over	
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1	pp 5700.000	9.56	34.52	38.13	91.14	97.09	68.20	28.89 Peak
2	5725.000	9.64	34.54	38.13	46.63	52.68	68.20	-15.52 Peak
3	5734.884	9.68	34.54	38.12	50.51	56.61	68.20	-11.59 Peak




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM180200138802

Page: 546 of 817

Test mode:	802.11a	Frequency(MHz):	5700	Peak	Horizontal
------------	---------	-----------------	------	------	------------

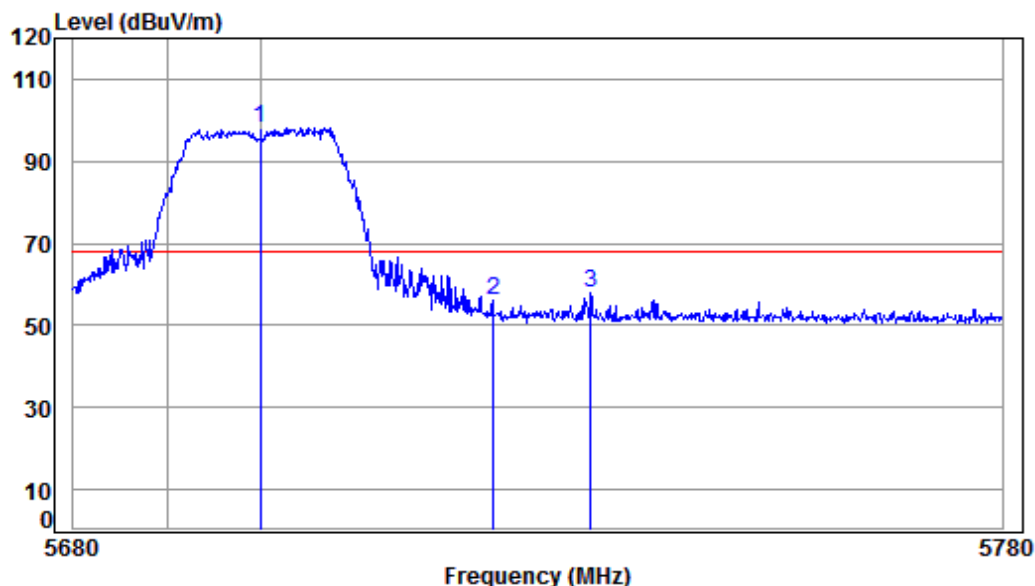

Condition: 3m HORIZONTAL

Job No : 0217RG

Mode : 5700 Band edge

: Ant 2 5G WIFI 11A CH140

		Cable	Ant	Preamp	Read		Limit	Over	
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	pp 5700.000	9.56	34.52	38.13	92.24	98.19	68.20	29.99	peak
2	5725.000	9.64	34.54	38.13	50.06	56.11	68.20	-12.09	peak
3	5735.484	9.68	34.54	38.12	51.73	57.83	68.20	-10.37	peak




SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch

Report No.: SZEM180200138802

Page: 547 of 817

Test mode:	802.11a	Frequency(MHz):	5745	Peak	Vertical
------------	---------	-----------------	------	------	----------

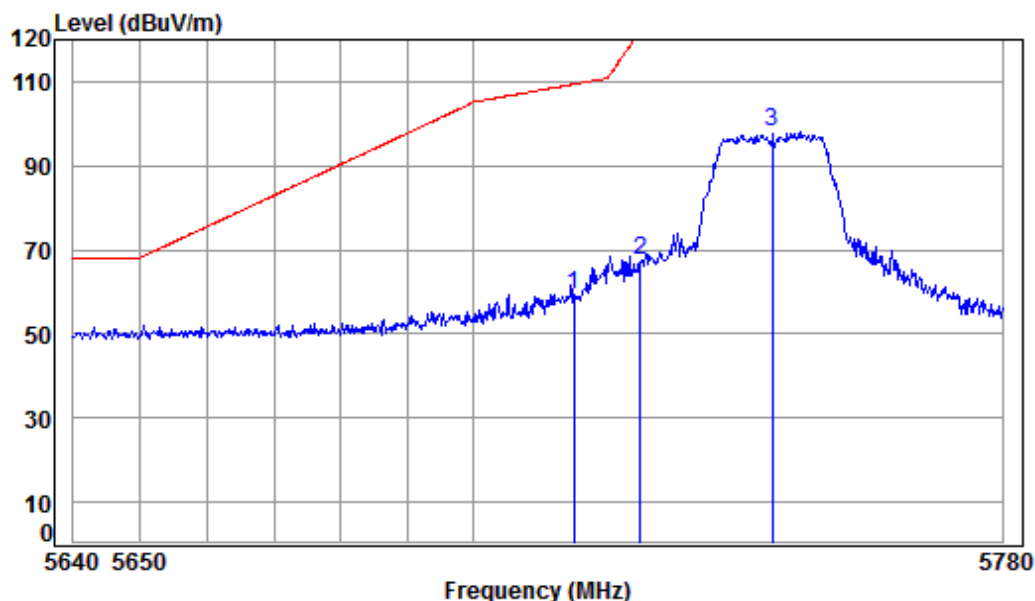

Condition: 3m VERTICAL

Job No : 0217RG

Mode : 5745 Band edge

: Ant 2 5G WIFI 11A CH149

	Freq	Cable Loss	Ant Factor	Preamplifier Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	5715.000	9.61	34.53	38.13	53.36	59.37	109.40	-50.03	peak
2	5725.000	9.64	34.54	38.13	61.55	67.60	122.20	-54.60	peak
3 pp	5745.000	9.71	34.55	38.12	91.80	97.94	125.20	-27.26	peak




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM180200138802

Page: 548 of 817

Test mode:	802.11a	Frequency(MHz):	5745	Peak	Horizontal
------------	---------	-----------------	------	------	------------

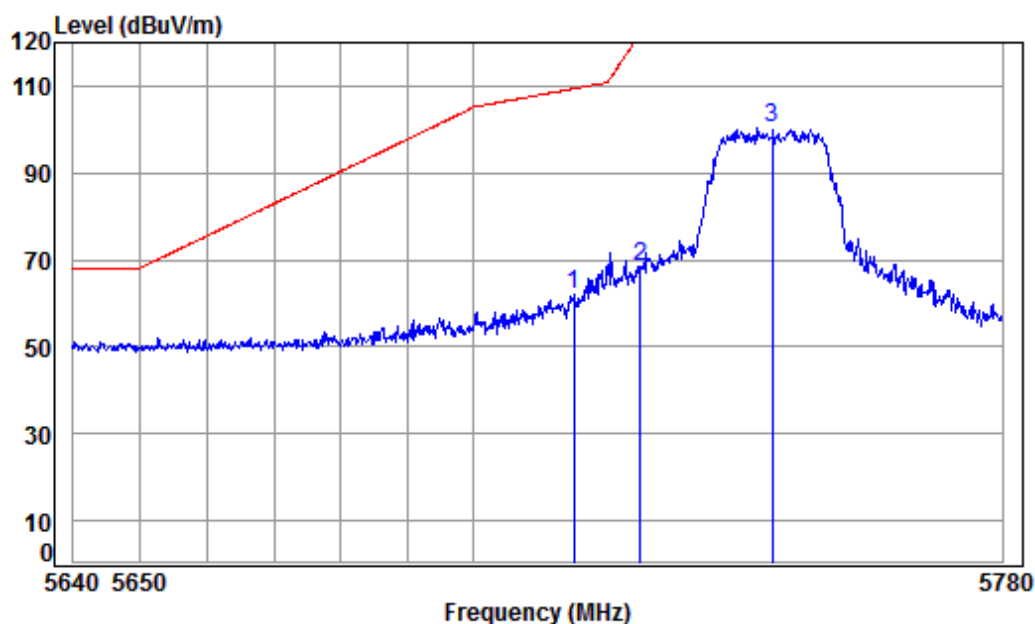

Condition: 3m HORIZONTAL

Job No : 0217RG

Mode : 5745 Band edge

: Ant 2 5G WIFI 11A CH149

	Freq	Cable Loss	Ant Factor	Preamplifier Factor	Read Level	Limit Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	5715.000	9.61	34.53	38.13	56.04	62.05	109.40	-47.35	peak
2	5725.000	9.64	34.54	38.13	62.57	68.62	122.20	-53.58	peak
3 pp	5745.000	9.71	34.55	38.12	94.14	100.28	125.20	-24.92	peak




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM180200138802

Page: 549 of 817

Test mode:	802.11a	Frequency(MHz):	5825	Peak	Vertical
------------	---------	-----------------	------	------	----------

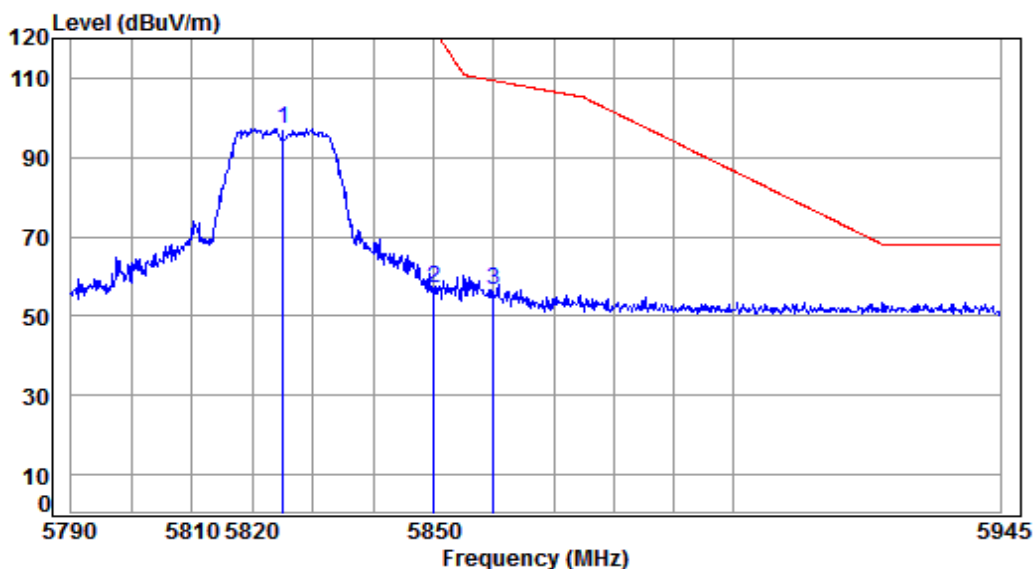

Condition: 3m VERTICAL

Job No : 0217RG

Mode : 5825 Band edge

: Ant 2 5G WIFI 11A CH165

		Cable	Ant	Preamp	Read	Limit	Over	
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1	pp 5825.000	9.98	34.60	38.12	90.88	97.34	125.20	-27.86 peak
2	5850.000	10.07	34.61	38.11	50.30	56.87	122.20	-65.33 peak
3	5860.000	10.10	34.62	38.11	49.98	56.59	109.40	-52.81 peak




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM180200138802

Page: 550 of 817

Test mode:	802.11a	Frequency(MHz):	5825	Peak	Horizontal
------------	---------	-----------------	------	------	------------

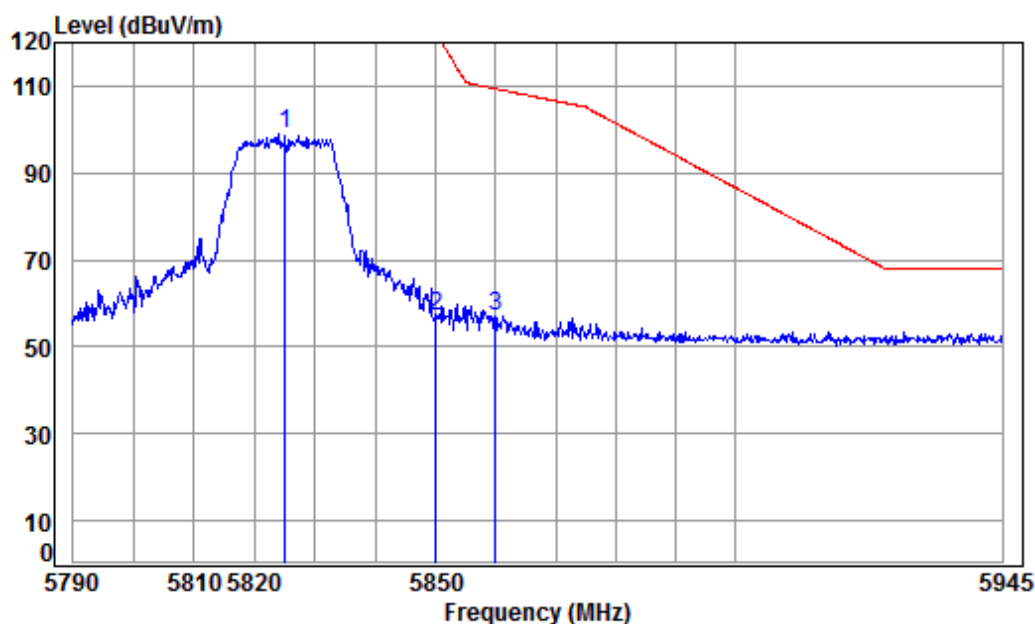

Condition: 3m HORIZONTAL

Job No : 0217RG

Mode : 5825 Band edge

: Ant 2 5G WIFI 11A CH165

		Cable	Ant	Preamp	Read	Limit	Over	
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1 pp	5825.000	9.98	34.60	38.12	92.38	98.84	125.20	-26.36 peak
2	5850.000	10.07	34.61	38.11	50.52	57.09	122.20	-65.11 peak
3	5860.000	10.10	34.62	38.11	50.36	56.97	109.40	-52.43 peak




SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch

Report No.: SZEM180200138802

Page: 551 of 817

Test mode:	802.11n(HT20)	Frequency(MHz):	5180	Peak	Vertical
------------	---------------	-----------------	------	------	----------

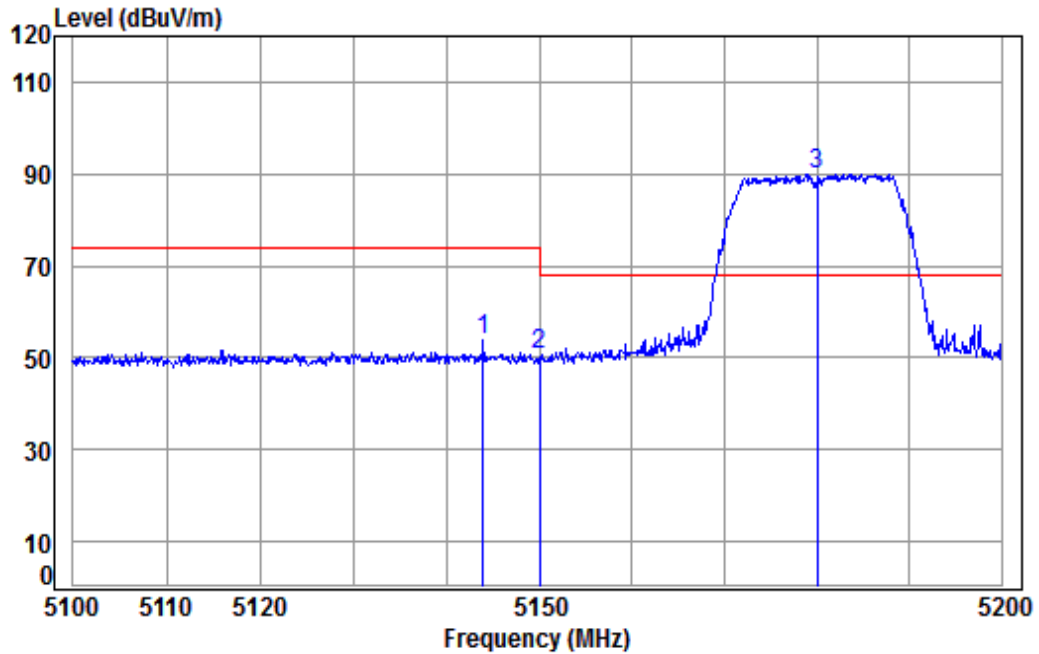

Condition: 3m VERTICAL

Job No : 0217RG

Mode : 5180 Band edge

: Ant 2 5G WIFI 11N CH36

		Cable	Ant	Preamp	Read		Limit	Over	
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	5143.960	8.32	34.47	38.18	49.44	54.05	74.00	-19.95	Peak
2	5149.980	8.33	34.47	38.18	46.24	50.86	74.00	-23.14	Peak
3 pp	5180.000	8.37	34.46	38.18	85.36	90.01	68.20	21.81	Peak




SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch

Report No.: SZEM180200138802

Page: 552 of 817

Test mode:	802.11n(HT20)	Frequency(MHz):	5180	Average	Vertical
------------	---------------	-----------------	------	---------	----------

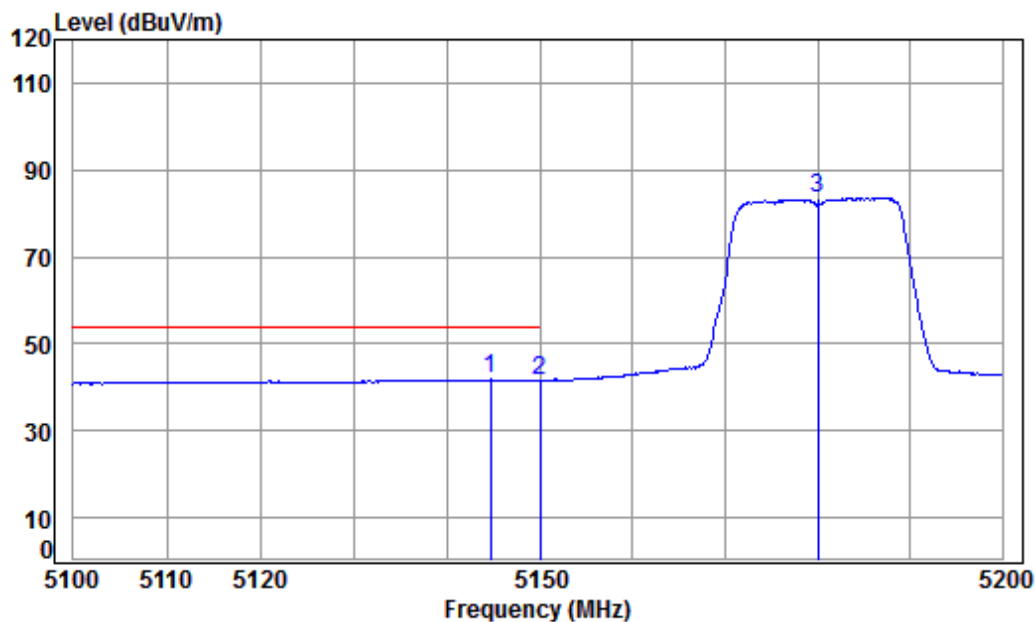

Condition: 3m VERTICAL

Job No : 0217RG

Mode : 5180 Band edge

: Ant 2 5G WIFI 11N CH36

		Cable	Ant	Preamp	Read	Limit	Over	
Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1 pp 5144.660	8.32	34.47	38.18	37.25	41.86	54.00	-12.14	Average
2 5149.980	8.33	34.47	38.18	37.07	41.69	54.00	-12.31	Average
3 5180.000	8.37	34.46	38.18	78.84	83.49	-----	-----	Average




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM180200138802

Page: 553 of 817

Test mode:	802.11n(HT20)	Frequency(MHz):	5180	Peak	Horizontal
------------	---------------	-----------------	------	------	------------

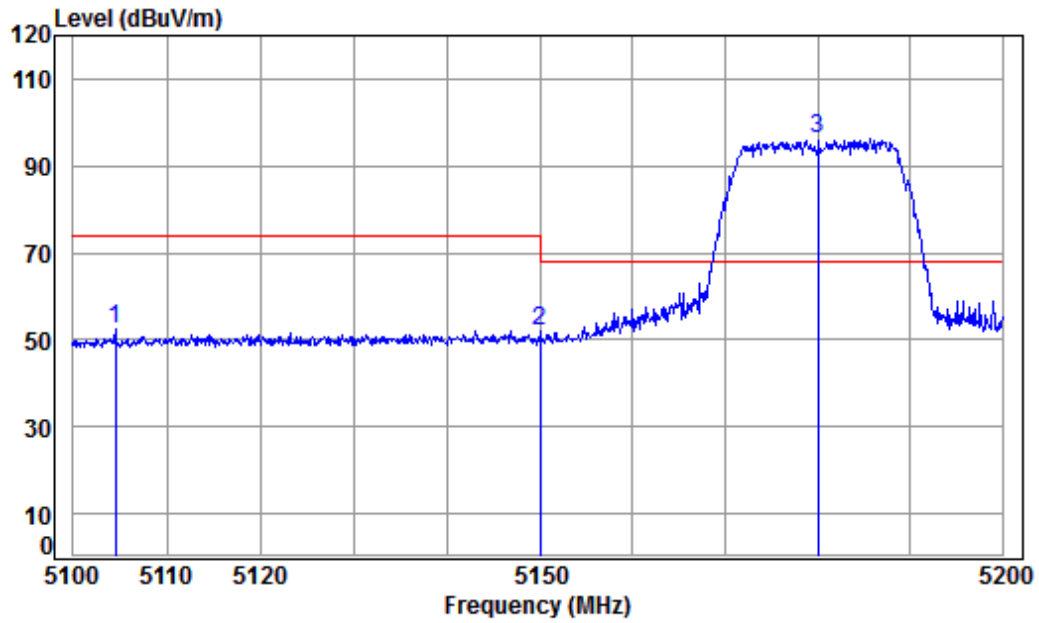

Condition: 3m HORIZONTAL

Job No : 0217RG

Mode : 5180 Band edge

: Ant 2 5G WIFI 11N CH36

		Cable	Ant	Preamp	Read	Limit	Over	
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1	5104.558	8.26	34.48	38.19	47.75	52.30	74.00	-21.70 peak
2	5149.980	8.33	34.47	38.18	47.42	52.04	74.00	-21.96 peak
3 pp	5180.000	8.37	34.46	38.18	91.62	96.27	68.20	28.07 peak




SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch

Report No.: SZEM180200138802

Page: 554 of 817

Test mode:	802.11n(HT20)	Frequency(MHz):	5180	Average	Horizontal
------------	---------------	-----------------	------	---------	------------

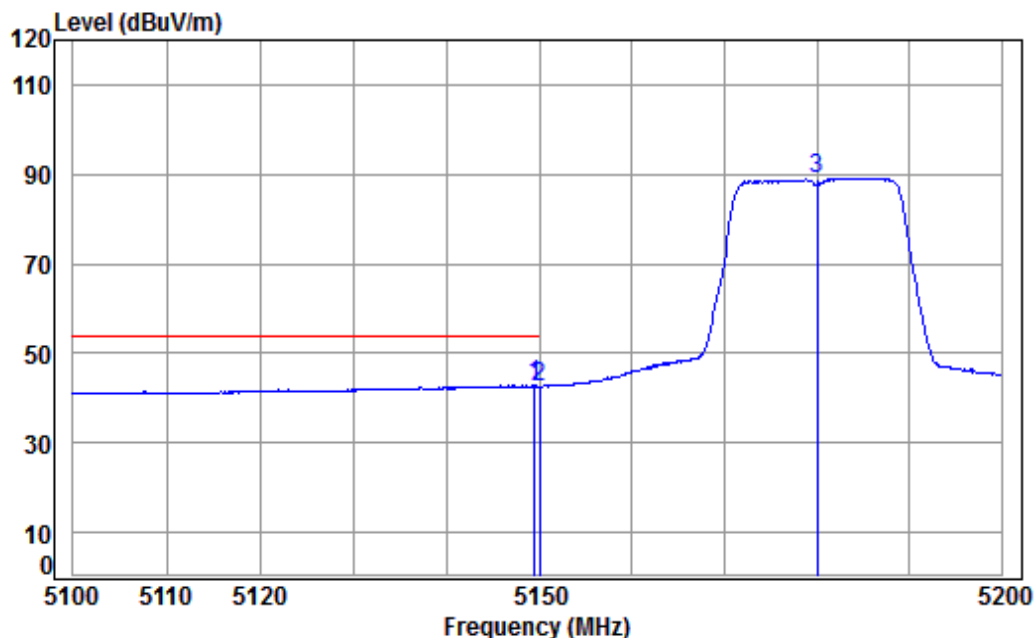

Condition: 3m HORIZONTAL

Job No : 0217RG

Mode : 5180 Band edge

: Ant 2 5G WIFI 11N CH36

		Cable	Ant	Preamp	Read	Limit	Over	
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1	pp 5149.458	8.32	34.47	38.18	38.10	42.71	54.00	-11.29 Average
2	5149.980	8.33	34.47	38.18	38.03	42.65	54.00	-11.35 Average
3	5180.000	8.37	34.46	38.18	84.42	89.07	-----	----- Average




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM180200138802

Page: 555 of 817

Test mode:	802.11n(HT20)	Frequency(MHz):	5240	Peak	Vertical
------------	---------------	-----------------	------	------	----------

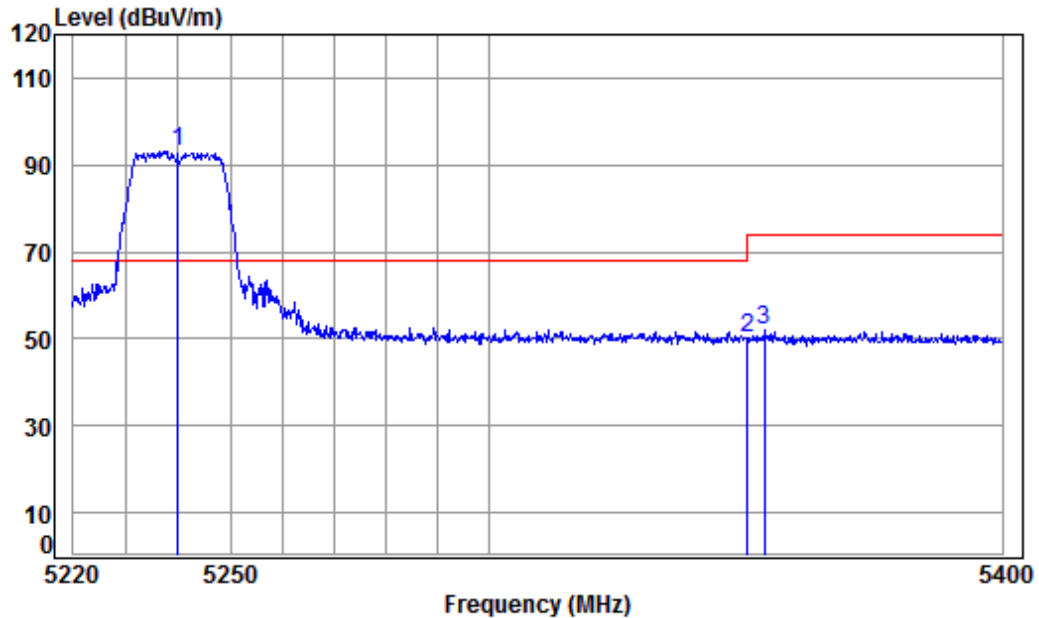

Condition: 3m VERTICAL

Job No : 0217RG

Mode : 5240 Band edge

: Ant 2 5G WIFI 11N CH48

		Cable	Ant	Preamp	Read	Limit	Over	
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1	pp 5240.000	8.46	34.45	38.17	88.40	93.14	68.20	24.94 Peak
2	5350.020	8.63	34.43	38.16	45.40	50.30	74.00	-23.70 Peak
3	5353.337	8.63	34.43	38.16	47.19	52.09	74.00	-21.91 Peak




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM180200138802

Page: 556 of 817

Test mode:	802.11n(HT20)	Frequency(MHz):	5240	Average	Vertical
------------	---------------	-----------------	------	---------	----------

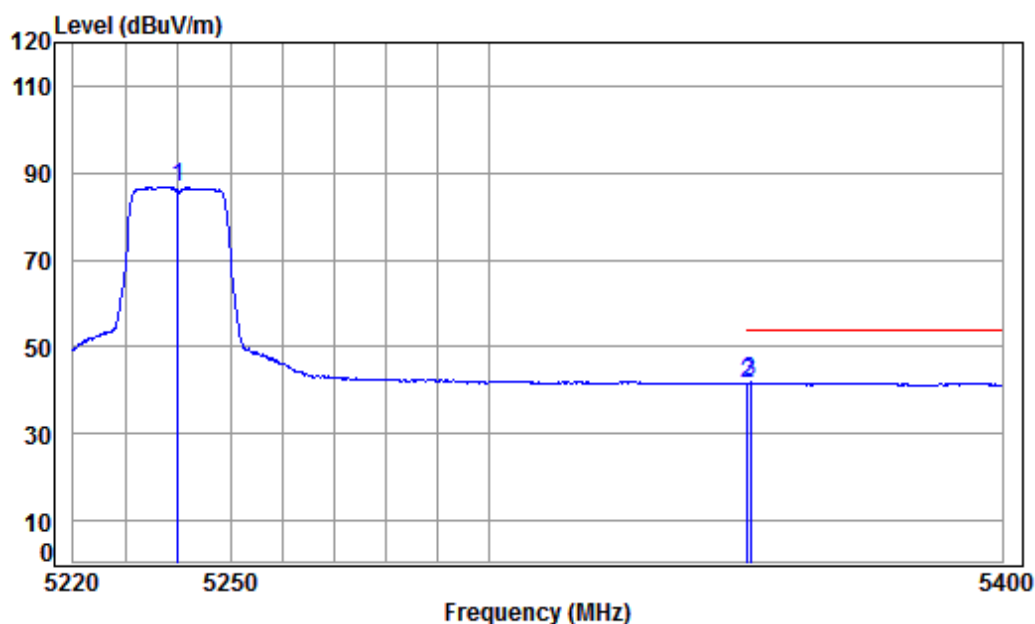

Condition: 3m VERTICAL

Job No : 0217RG

Mode : 5240 Band edge

: Ant 2 5G WIFI 11N CH48

	Freq	Cable Loss	Ant Factor	Preamplifier Factor	Read Level	Limit Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	5240.000	8.46	34.45	38.17	82.08	86.82	-----	-----	Average
2	5350.020	8.63	34.43	38.16	36.80	41.70	54.00	-12.30	Average
3 pp	5350.616	8.63	34.43	38.16	36.86	41.76	54.00	-12.24	Average




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM180200138802

Page: 557 of 817

Test mode:	802.11n(HT20)	Frequency(MHz):	5240	Peak	Horizontal
------------	---------------	-----------------	------	------	------------

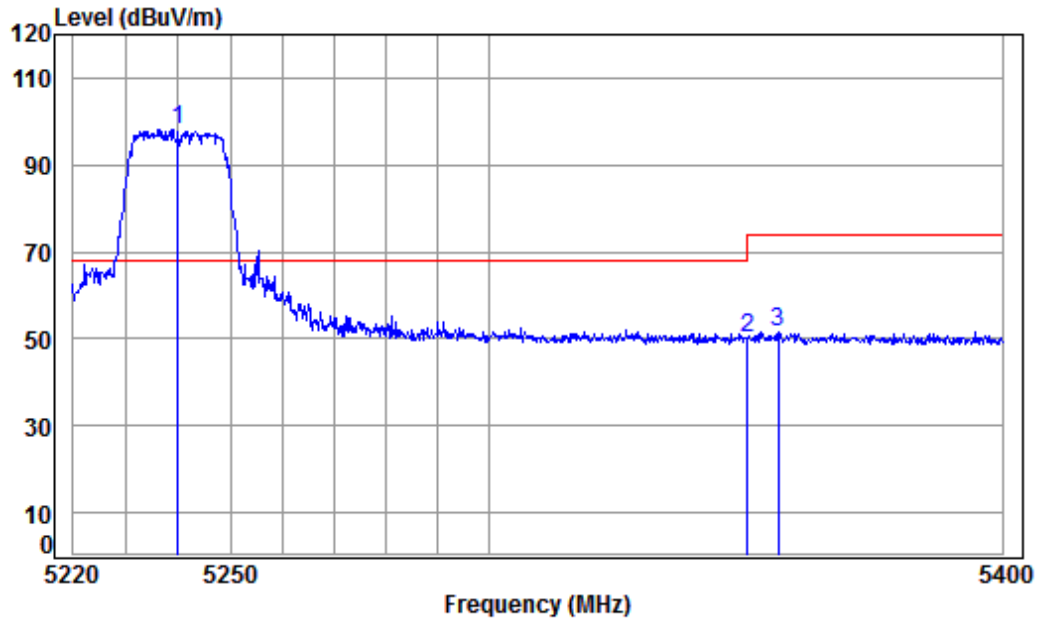

Condition: 3m HORIZONTAL

Job No : 0217RG

Mode : 5240 Band edge

: Ant 2 5G WIFI 11N CH48

		Cable	Ant	Preamp	Read	Limit	Over	
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1	pp 5240.000	8.46	34.45	38.17	93.50	98.24	68.20	30.04 peak
2	5350.020	8.63	34.43	38.16	45.37	50.27	74.00	-23.73 peak
3	5356.060	8.64	34.43	38.16	46.74	51.65	74.00	-22.35 peak




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM180200138802

Page: 558 of 817

Test mode:	802.11n(HT20)	Frequency(MHz):	5240	Average	Horizontal
------------	---------------	-----------------	------	---------	------------

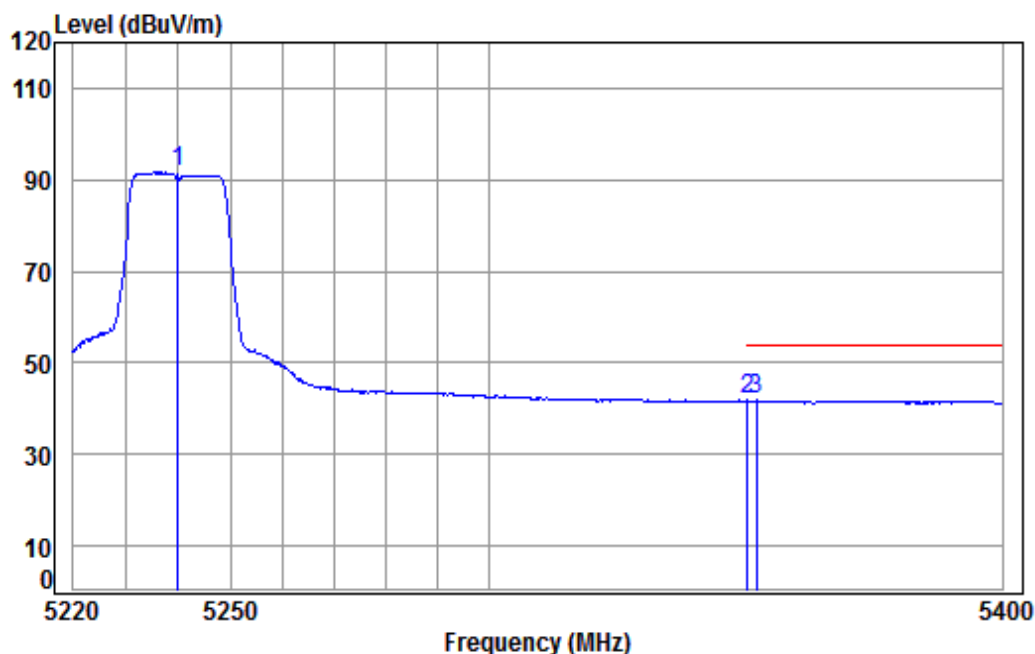

Condition: 3m HORIZONTAL

Job No : 0217RG

Mode : 5240 Band edge

: Ant 2 5G WIFI 11N CH48

		Cable	Ant	Preamp	Read		Limit	Over	
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	5240.000	8.46	34.45	38.17	86.88	91.62	-----	-----	Average
2	pp 5350.020	8.63	34.43	38.16	36.92	41.82	54.00	-12.18	Average
3	5351.704	8.63	34.43	38.16	36.87	41.77	54.00	-12.23	Average




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM180200138802

Page: 559 of 817

Test mode:	802.11n(HT20)	Frequency(MHz):	5260	Peak	Vertical
------------	---------------	-----------------	------	------	----------

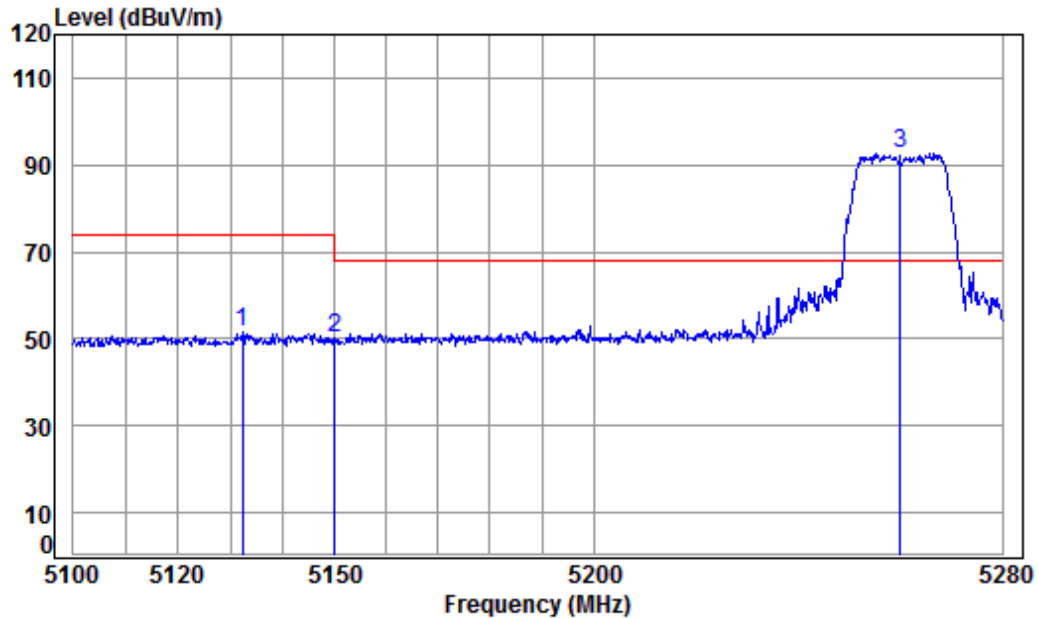

Condition: 3m VERTICAL

Job No : 0217RG

Mode : 5260 Band edge

: Ant 2 5G WIFI 11N CH52

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	5132.297	8.30	34.47	38.19	47.05	51.63	74.00	-22.37	Peak
2	5149.980	8.33	34.47	38.18	45.35	49.97	74.00	-24.03	Peak
3 pp	5260.000	8.49	34.45	38.17	87.68	92.45	68.20	24.25	Peak




SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch

Report No.: SZEM180200138802

Page: 560 of 817

Test mode:	802.11n(HT20)	Frequency(MHz):	5260	Average	Vertical
------------	---------------	-----------------	------	---------	----------

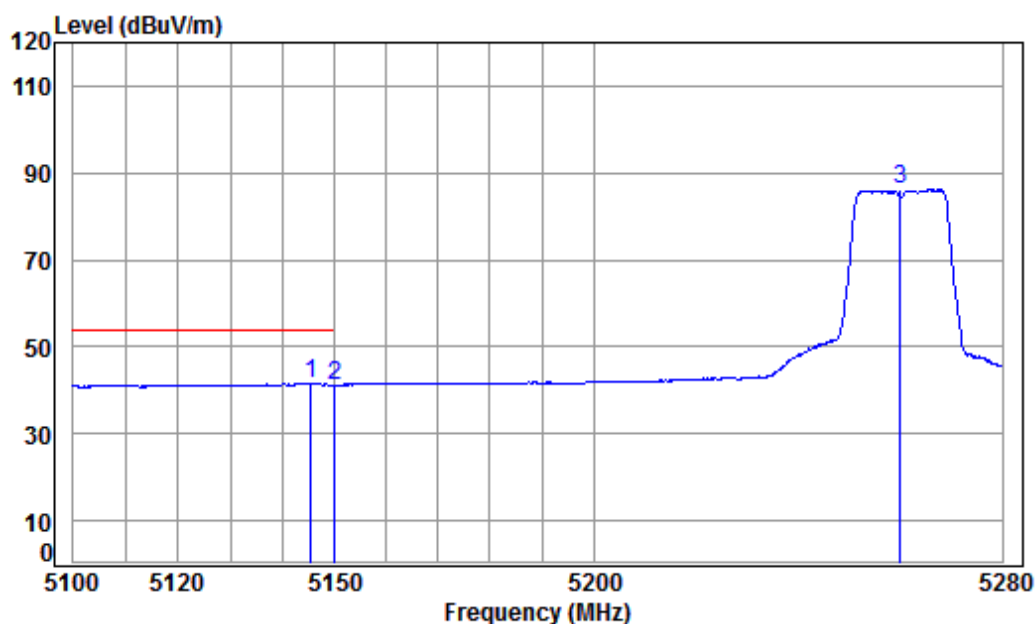

Condition: 3m VERTICAL

Job No : 0217RG

Mode : 5260 Band edge

: Ant 2 5G WIFI 11N CH52

		Cable	Ant	Preamp	Read	Limit	Over	
Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1 pp 5145.487	8.32	34.47	38.18	36.88	41.49	54.00	-12.51	Average
2 5149.980	8.33	34.47	38.18	36.63	41.25	54.00	-12.75	Average
3 5260.000	8.49	34.45	38.17	81.33	86.10	-----	-----	Average




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM180200138802

Page: 561 of 817

Test mode:	802.11n(HT20)	Frequency(MHz):	5260	Peak	Horizontal
------------	---------------	-----------------	------	------	------------

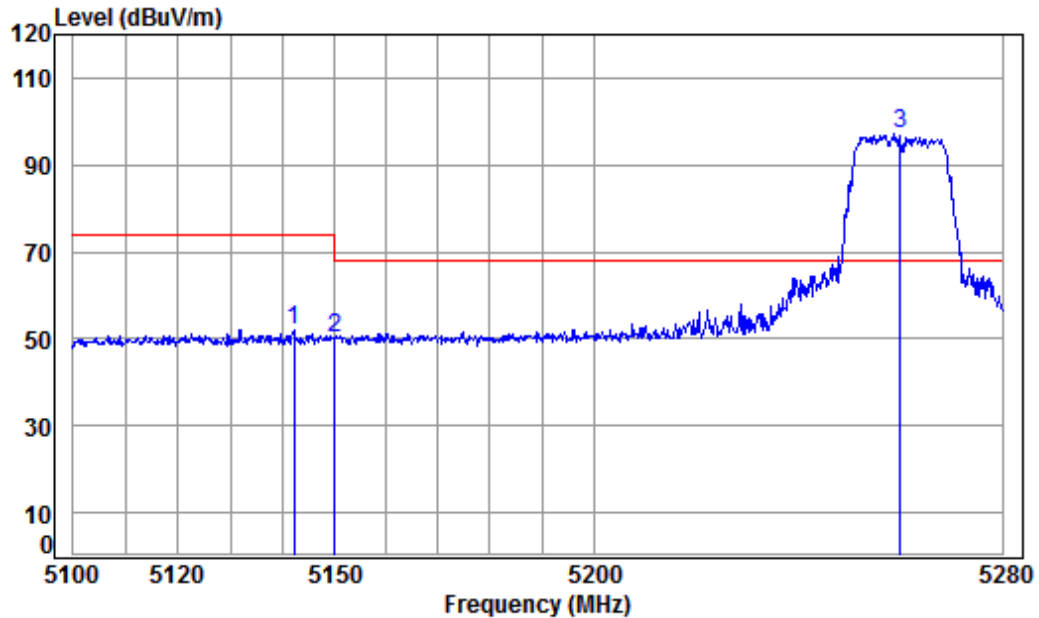

Condition: 3m HORIZONTAL

Job No : 0217RG

Mode : 5260 Band edge

: Ant 2 5G WIFI 11N CH52

	Freq	Cable Loss	Ant Factor	Preamplifier Factor	Read Level	Limit Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	5142.275	8.31	34.47	38.18	47.62	52.22	74.00	-21.78	peak
2	5149.980	8.33	34.47	38.18	45.73	50.35	74.00	-23.65	peak
3 pp	5260.000	8.49	34.45	38.17	92.31	97.08	68.20	28.88	peak




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM180200138802

Page: 562 of 817

Test mode:	802.11n(HT20)	Frequency(MHz):	5260	Average	Horizontal
------------	---------------	-----------------	------	---------	------------

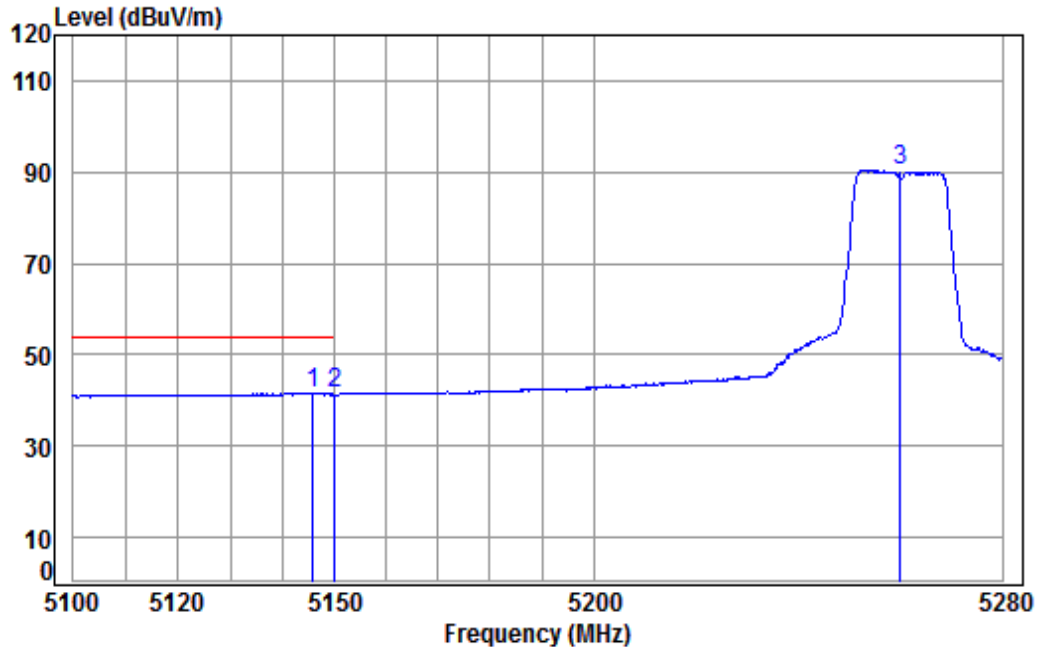

Condition: 3m HORIZONTAL

Job No : 0217RG

Mode : 5260 Band edge

: Ant 2 5G WIFI 11N CH52

		Cable	Ant	Preamp	Read		Limit	Over	
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1 pp	5145.844	8.32	34.47	38.18	36.97	41.58	54.00	-12.42	Average
2	5149.980	8.33	34.47	38.18	36.69	41.31	54.00	-12.69	Average
3	5260.000	8.49	34.45	38.17	85.56	90.33	-----	-----	Average




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM180200138802

Page: 563 of 817

Test mode:	802.11n(HT20)	Frequency(MHz):	5320	Peak	Vertical
------------	---------------	-----------------	------	------	----------

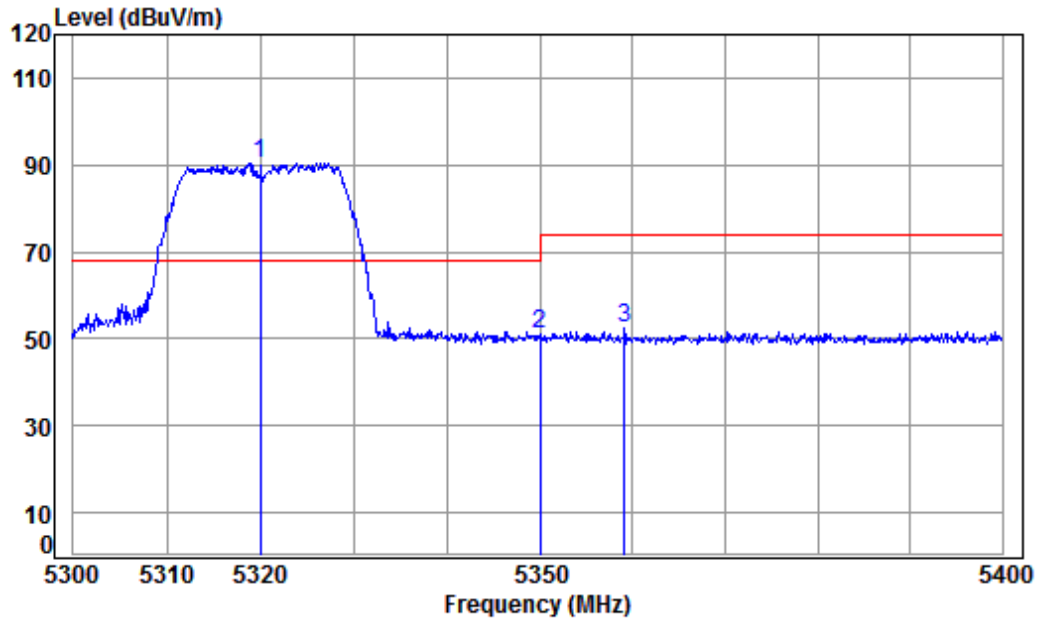

Condition: 3m VERTICAL

Job No : 0217RG

Mode : 5320 Band edge

: Ant 2 5G WIFI 11N CH64

		Cable	Ant	Preamp	Read	Limit	Over	
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1	pp 5320.000	8.58	34.43	38.17	85.53	90.37	68.20	22.17 Peak
2	5350.020	8.63	34.43	38.16	46.20	51.10	74.00	-22.90 Peak
3	5359.074	8.64	34.43	38.16	47.38	52.29	74.00	-21.71 Peak




SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch

Report No.: SZEM180200138802

Page: 564 of 817

Test mode:	802.11n(HT20)	Frequency(MHz):	5320	Average	Vertical
------------	---------------	-----------------	------	---------	----------

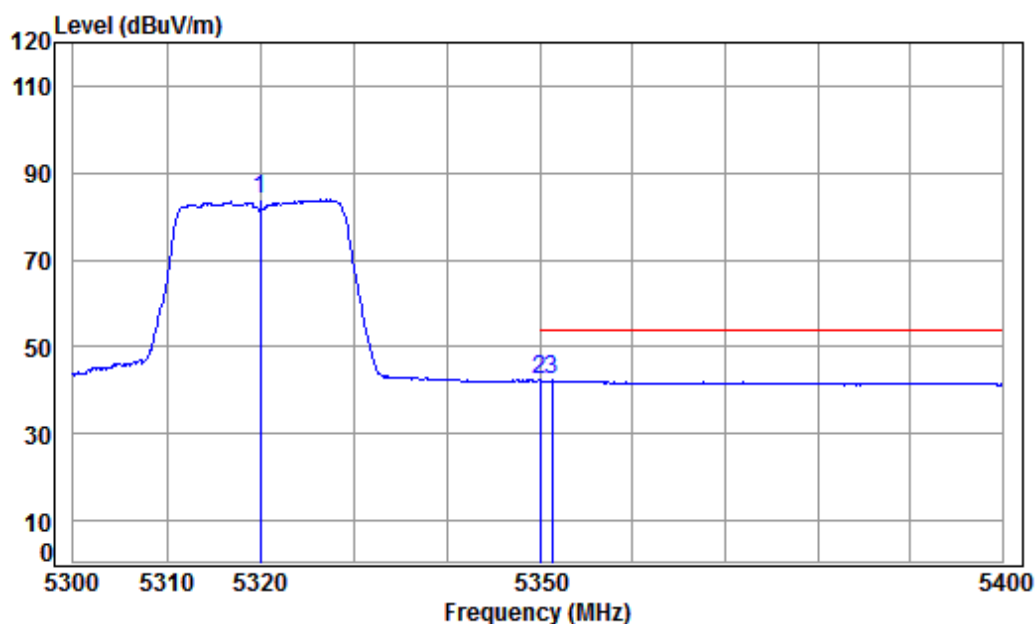

Condition: 3m VERTICAL

Job No : 0217RG

Mode : 5320 Band edge

: Ant 2 5G WIFI 11N CH64

	Freq	Cable Loss	Ant Factor	Preamplifier Factor	Read Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1	5320.000	8.58	34.43	38.17	78.97	83.81	-----	Average
2	pp 5350.020	8.63	34.43	38.16	37.45	42.35	54.00	-11.65 Average
3	5351.367	8.63	34.43	38.16	37.35	42.25	54.00	-11.75 Average




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM180200138802

Page: 565 of 817

Test mode:	802.11n(HT20)	Frequency(MHz):	5320	Peak	Horizontal
------------	---------------	-----------------	------	------	------------

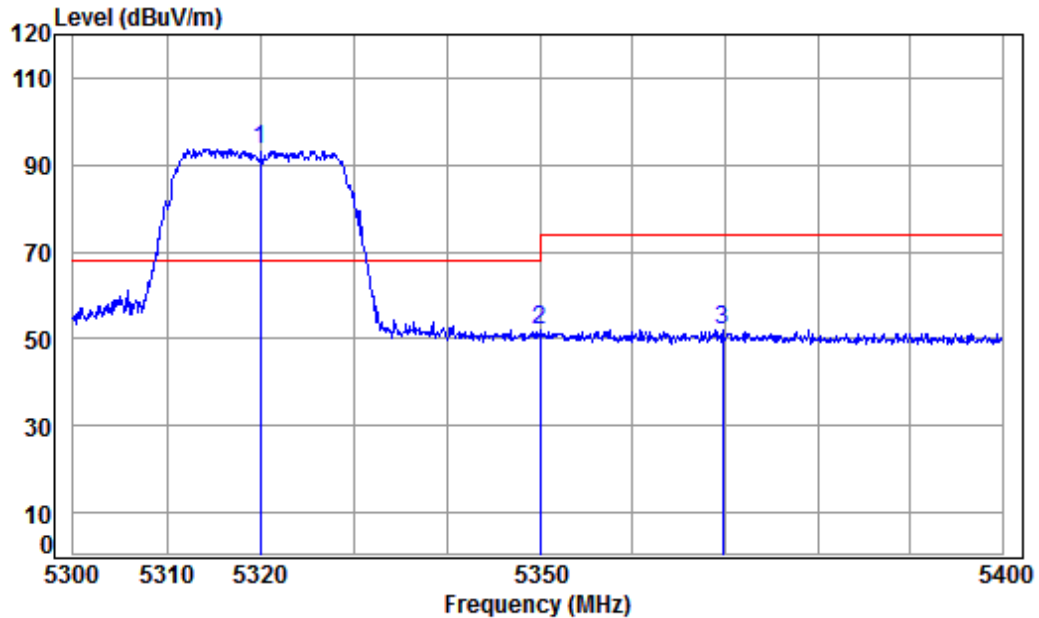

Condition: 3m HORIZONTAL

Job No : 0217RG

Mode : 5320 Band edge

: Ant 2 5G WIFI 11N CH64

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1 pp	5320.000	8.58	34.43	38.17	88.85	93.69	68.20	25.49	peak
2	5350.020	8.63	34.43	38.16	47.06	51.96	74.00	-22.04	peak
3	5369.703	8.66	34.43	38.16	47.30	52.23	74.00	-21.77	peak




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM180200138802

Page: 566 of 817

Test mode:	802.11n(HT20)	Frequency(MHz):	5320	Average	Horizontal
------------	---------------	-----------------	------	---------	------------

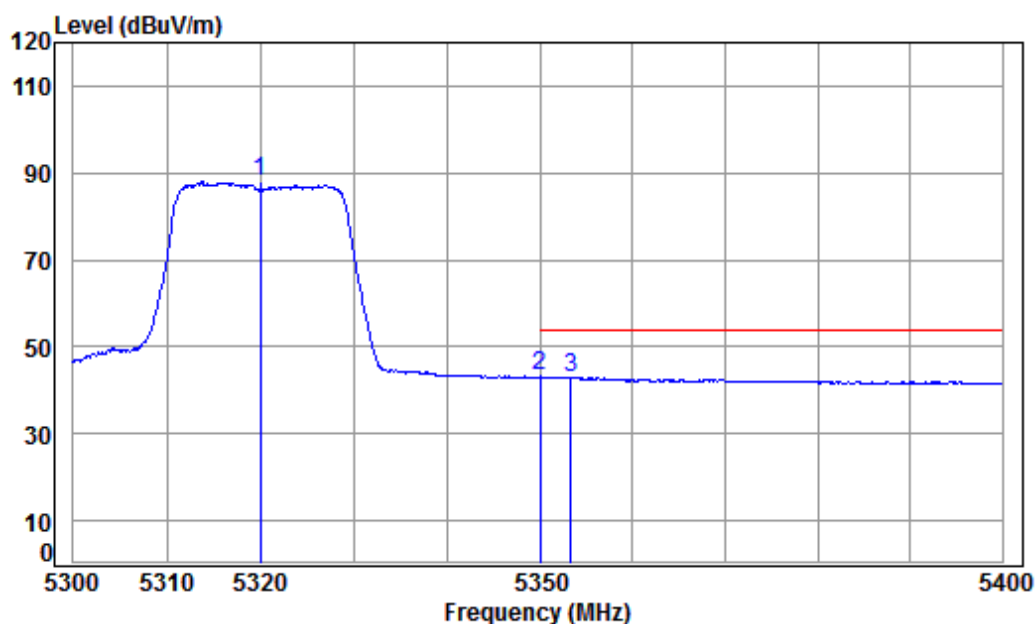

Condition: 3m HORIZONTAL

Job No : 0217RG

Mode : 5320 Band edge

: Ant 2 5G WIFI 11N CH64

	Freq	Cable Loss	Ant Factor	Preamplifier Factor	Read Level	Limit Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	5320.000	8.58	34.43	38.17	83.02	87.86	-----	-----	Average
2 pp	5350.020	8.63	34.43	38.16	38.23	43.13	54.00	-10.87	Average
3	5353.368	8.63	34.43	38.16	38.16	43.06	54.00	-10.94	Average




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM180200138802

Page: 567 of 817

Test mode:	802.11n(HT20)	Frequency(MHz):	5500	Peak	Vertical
------------	---------------	-----------------	------	------	----------

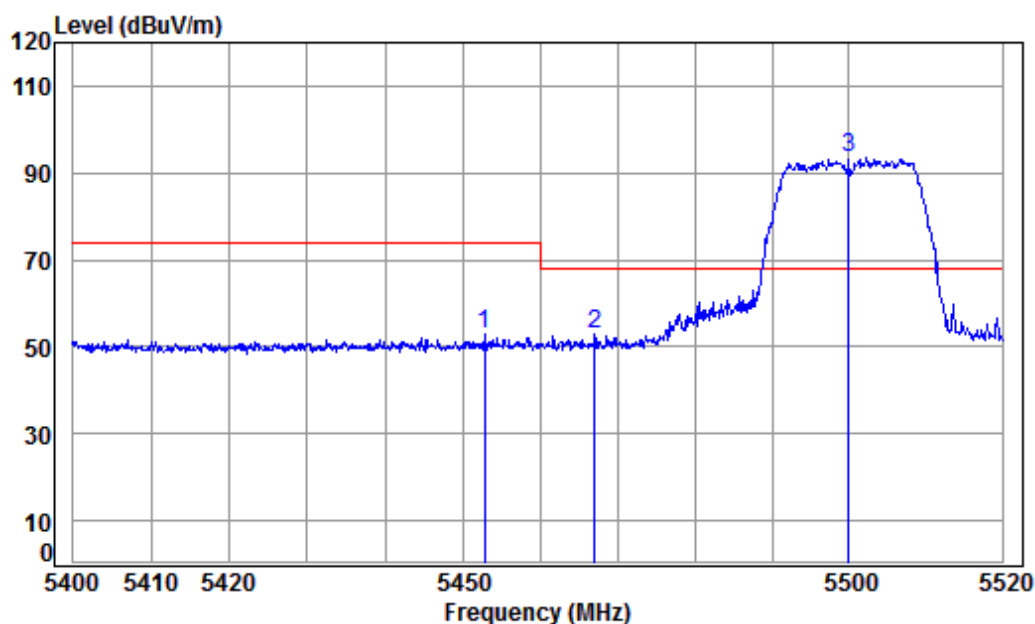

Condition: 3m VERTICAL

Job No : 0217RG

Mode : 5500 Band edge

: Ant 2 5G WIFI 11N CH100

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Limit Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	5452.835	8.78	34.41	38.15	48.07	53.11	74.00	-20.89	Peak
2	5466.995	8.80	34.41	38.15	47.87	52.93	68.20	-15.27	peak
3 pp	5500.000	8.85	34.40	38.15	88.64	93.74	68.20	25.54	Peak




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM180200138802

Page: 568 of 817

Test mode:	802.11n(HT20)	Frequency(MHz):	5500	Average	Vertical
------------	---------------	-----------------	------	---------	----------

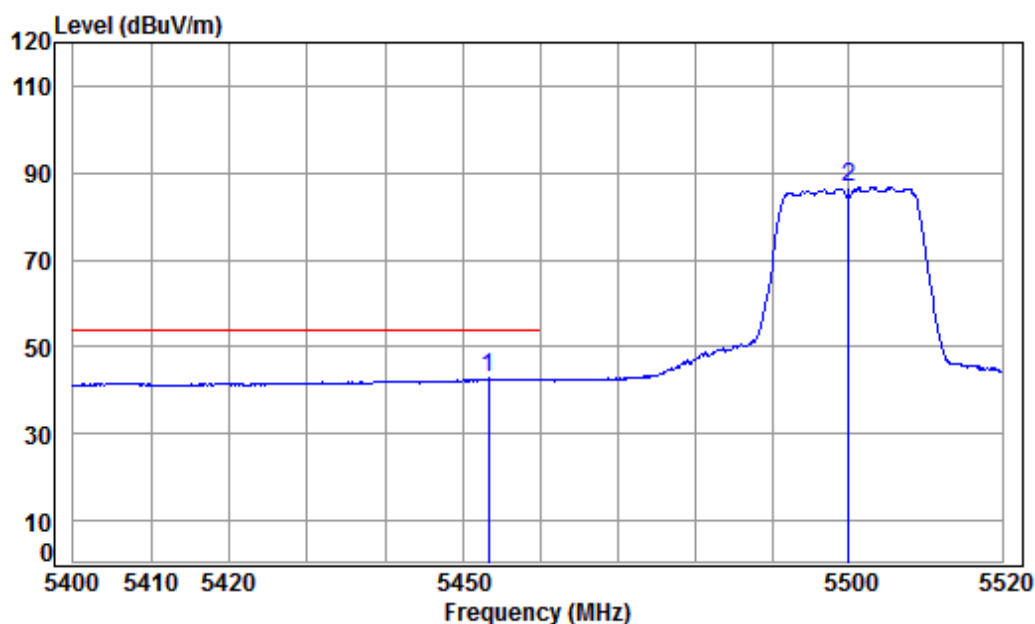

Condition: 3m VERTICAL

Job No : 0217RG

Mode : 5500 Band edge

: Ant 2 5G WIFI 11N CH100

		Cable	Ant	Preamp	Read	Limit	Over	
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1 pp	5453.314	8.78	34.41	38.15	37.66	42.70	54.00	-11.30 Average
2	5500.000	8.85	34.40	38.15	81.52	86.62	-----	----- Average




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM180200138802

Page: 569 of 817

Test mode:	802.11n(HT20)	Frequency(MHz):	5500	Peak	Horizontal
------------	---------------	-----------------	------	------	------------

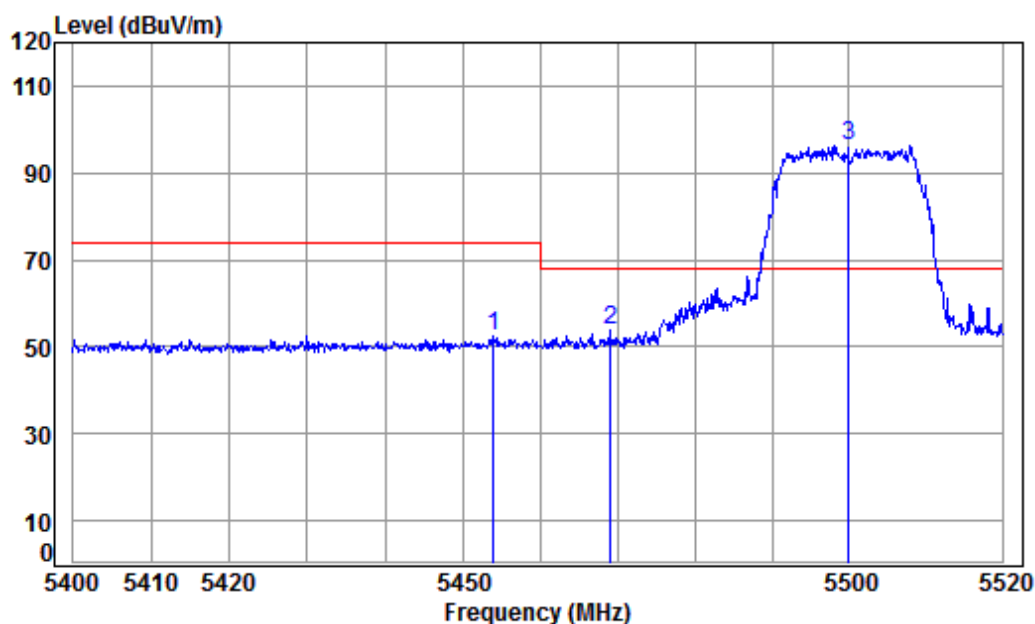

Condition: 3m HORIZONTAL

Job No : 0217RG

Mode : 5500 Band edge

: Ant 2 5G WIFI 11N CH100

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	5453.914	8.78	34.41	38.15	47.53	52.57	74.00	-21.43	peak
2	5469.038	8.80	34.41	38.15	48.60	53.66	68.20	-14.54	peak
3 pp	5500.000	8.85	34.40	38.15	91.08	96.18	68.20	27.98	peak




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM180200138802

Page: 570 of 817

Test mode:	802.11n(HT20)	Frequency(MHz):	5500	Average	Horizontal
------------	---------------	-----------------	------	---------	------------

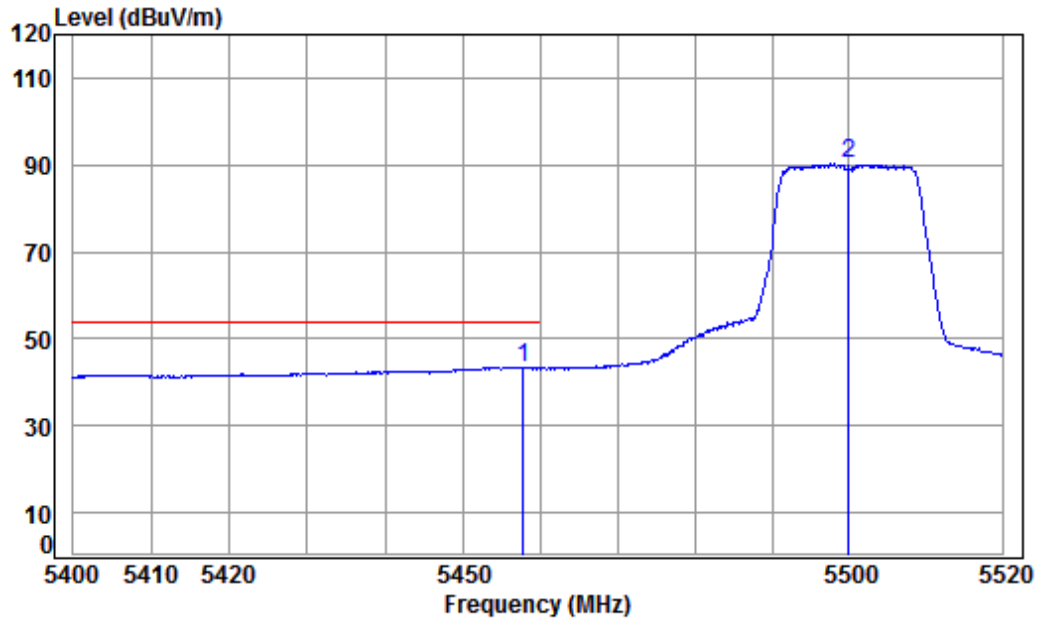

Condition: 3m HORIZONTAL

Job No : 0217RG

Mode : 5500 Band edge

: Ant 2 5G WIFI 11N CH100

		Cable	Ant	Preamp	Read	Limit	Over	
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1 pp	5457.871	8.79	34.41	38.15	38.52	43.57	54.00	-10.43 Average
2	5500.000	8.85	34.40	38.15	85.09	90.19	-----	----- Average




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM180200138802

Page: 571 of 817

Test mode:	802.11n(HT20)	Frequency(MHz):	5700	Peak	Vertical
------------	---------------	-----------------	------	------	----------

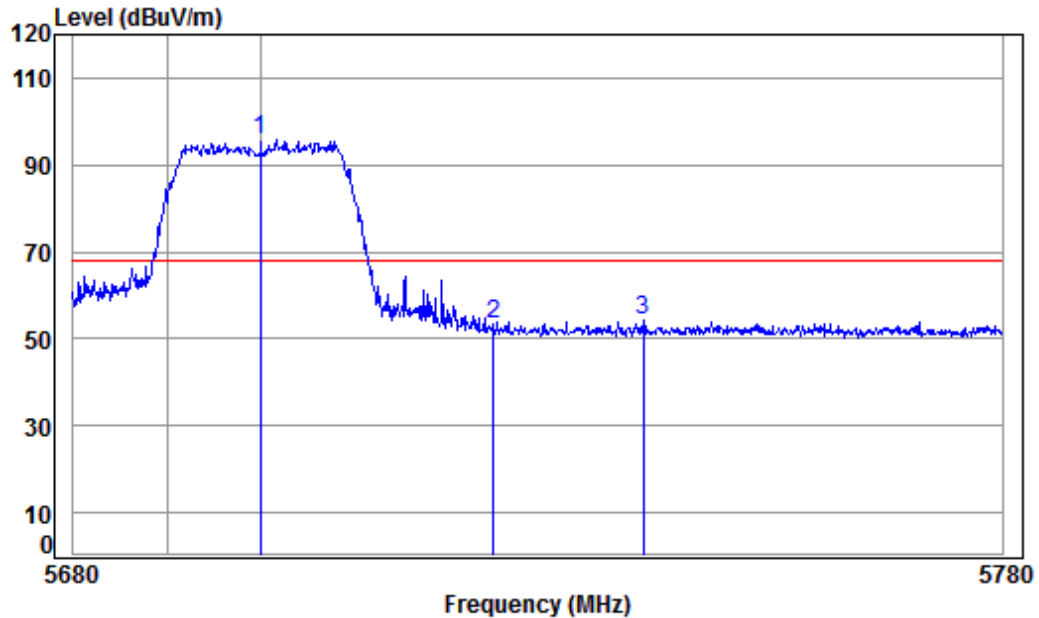

Condition: 3m VERTICAL

Job No : 0217RG

Mode : 5700 Band edge

: Ant 2 5G WIFI 11N CH140

		Cable	Ant	Preamp	Read	Limit	Over	
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1	pp 5700.000	9.56	34.52	38.13	89.69	95.64	68.20	27.44 Peak
2	5725.000	9.64	34.54	38.13	47.55	53.60	68.20	-14.60 Peak
3	5741.193	9.70	34.55	38.12	48.05	54.18	68.20	-14.02 Peak




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM180200138802

Page: 572 of 817

Test mode:	802.11n(HT20)	Frequency(MHz):	5700	Peak	Horizontal
------------	---------------	-----------------	------	------	------------

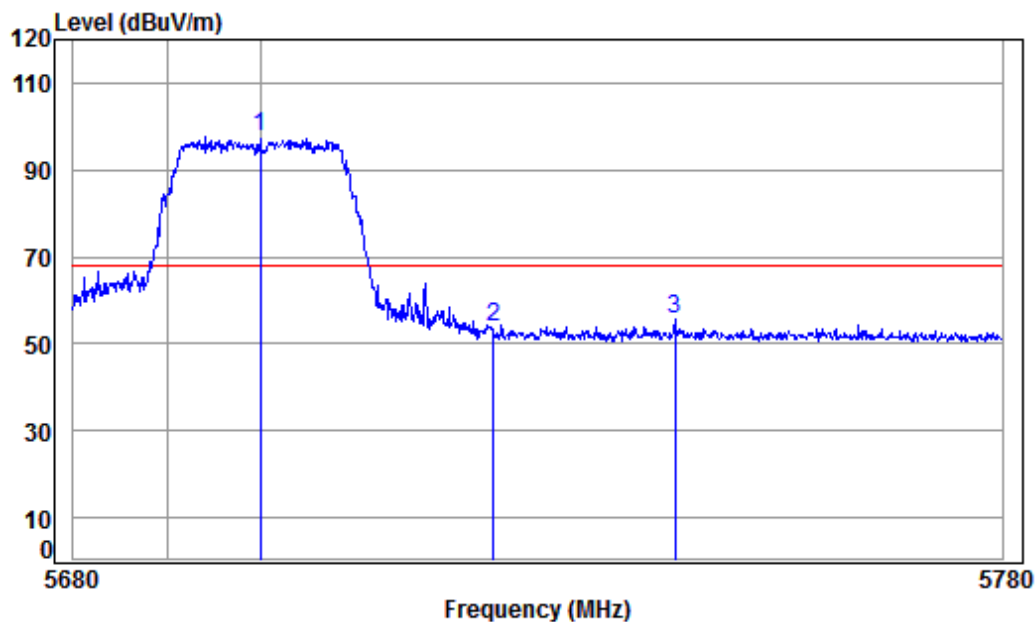

Condition: 3m HORIZONTAL

Job No : 0217RG

Mode : 5700 Band edge

: Ant 2 5G WIFI 11N CH140

		Cable	Ant	Preamp	Read	Limit	Over	
	Freq	Loss	Factor	Factor	Level	Level	Line	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1	pp 5700.000	9.56	34.52	38.13	91.91	97.86	68.20	29.66 peak
2	5725.000	9.64	34.54	38.13	47.60	53.65	68.20	-14.55 peak
3	5744.601	9.71	34.55	38.12	49.74	55.88	68.20	-12.32 peak




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM180200138802

Page: 573 of 817

Test mode:	802.11n(HT20)	Frequency(MHz):	5745	Peak	Vertical
------------	---------------	-----------------	------	------	----------

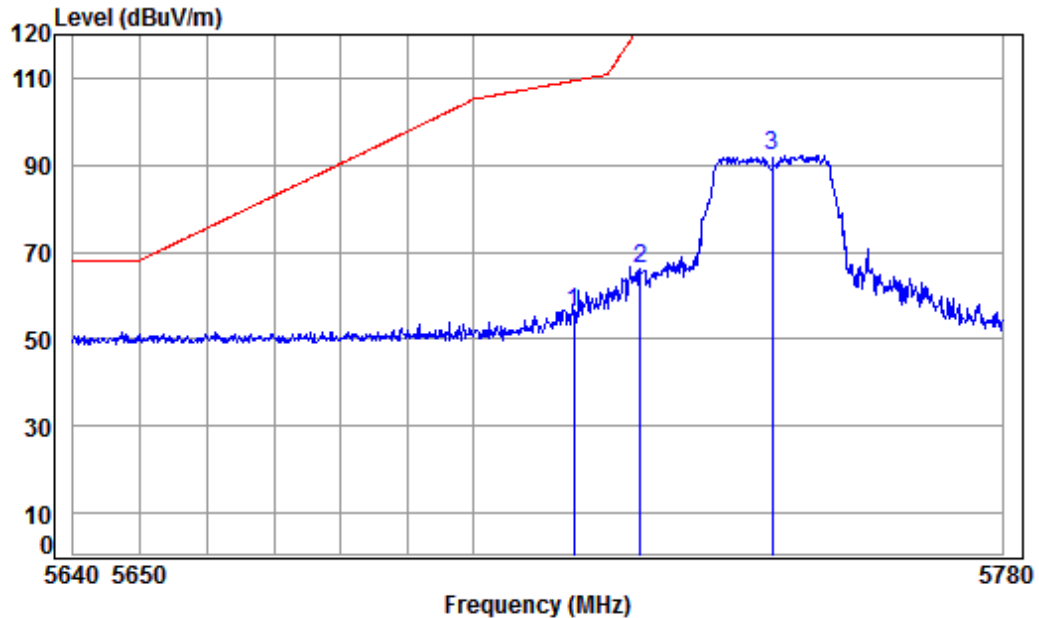

Condition: 3m VERTICAL

Job No : 0217RG

Mode : 5745 Band edge

: Ant 2 5G WIFI 11N CH149

		Cable	Ant	Preamp	Read		Limit	Over	
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	5715.000	9.61	34.53	38.13	50.14	56.15	109.40	-53.25	peak
2	5725.000	9.64	34.54	38.13	59.97	66.02	122.20	-56.18	peak
3 pp	5745.000	9.71	34.55	38.12	86.11	92.25	125.20	-32.95	peak




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM180200138802

Page: 574 of 817

Test mode:	802.11n(HT20)	Frequency(MHz):	5745	Peak	Horizontal
------------	---------------	-----------------	------	------	------------

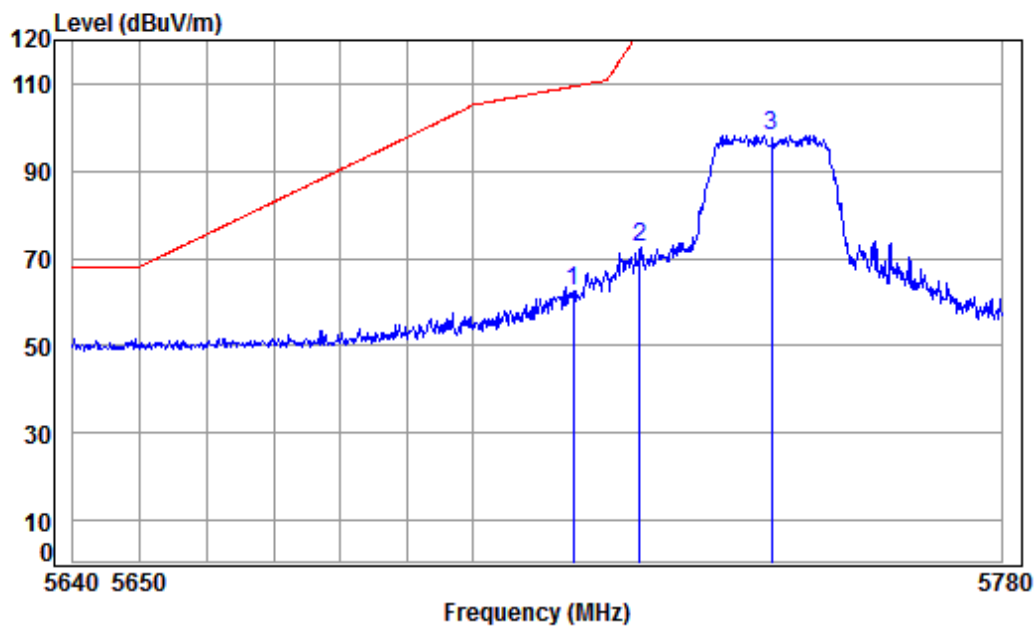

Condition: 3m HORIZONTAL

Job No : 0217RG

Mode : 5745 Band edge

: Ant 2 5G WIFI 11N CH149

		Cable	Ant	Preamp	Read		Limit	Over	
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	5715.000	9.61	34.53	38.13	56.37	62.38	109.40	-47.02	peak
2	5725.000	9.64	34.54	38.13	66.50	72.55	122.20	-49.65	peak
3 pp	5745.000	9.71	34.55	38.12	92.15	98.29	125.20	-26.91	peak




SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch

Report No.: SZEM180200138802

Page: 575 of 817

Test mode:	802.11n(HT20)	Frequency(MHz):	5825	Peak	Vertical
------------	---------------	-----------------	------	------	----------

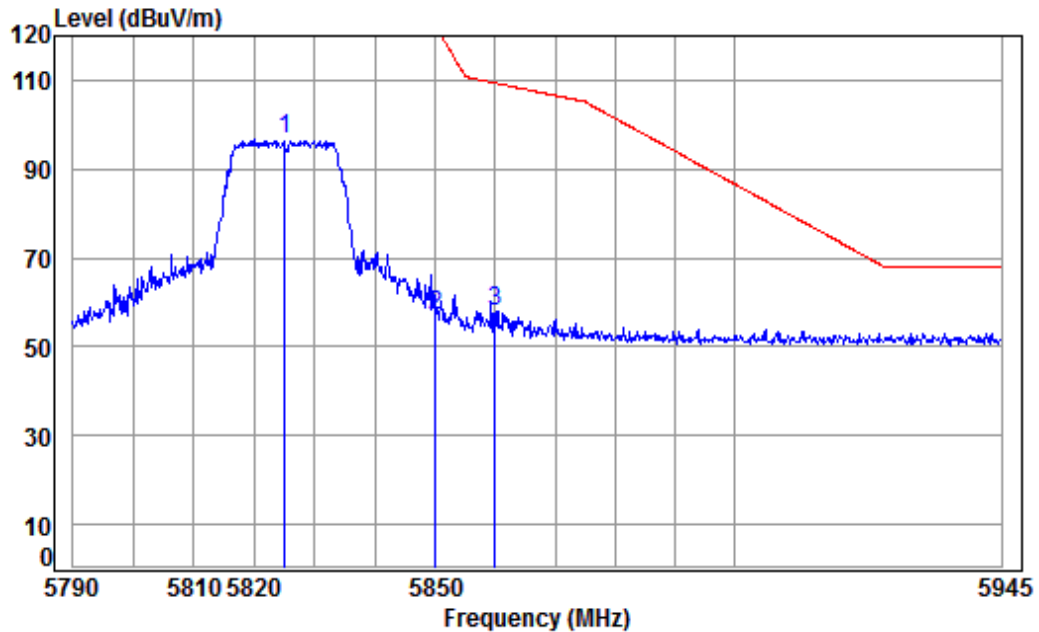

Condition: 3m VERTICAL

Job No : 0217RG

Mode : 5825 Band edge

: Ant 2 5G WIFI 11N CH165

		Cable	Ant	Preamp	Read	Limit	Over	
Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1 pp 5825.000	9.98	34.60	38.12	90.50	96.96	125.20	-28.24	peak
2 5850.000	10.07	34.61	38.11	50.56	57.13	122.20	-65.07	peak
3 5860.000	10.10	34.62	38.11	51.15	57.76	109.40	-51.64	peak




SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch

Report No.: SZEM180200138802

Page: 576 of 817

Test mode:	802.11n(HT20)	Frequency(MHz):	5825	Peak	Horizontal
------------	---------------	-----------------	------	------	------------

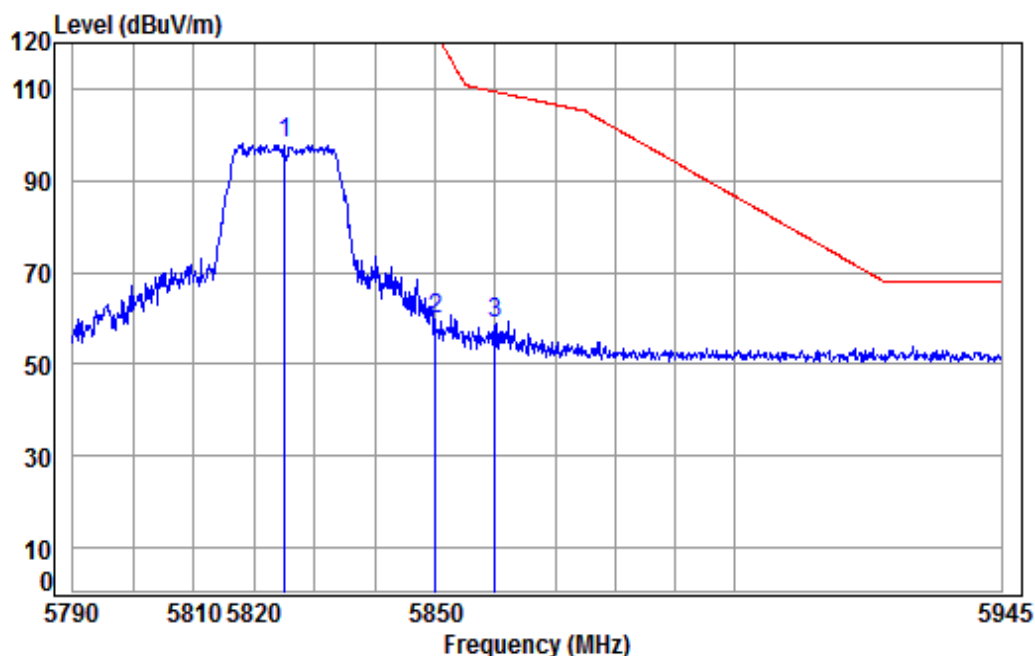

Condition: 3m HORIZONTAL

Job No : 0217RG

Mode : 5825 Band edge

: Ant 2 5G WIFI 11N CH165

		Cable	Ant	Preamp	Read		Limit	Over	
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1 pp	5825.000	9.98	34.60	38.12	91.68	98.14	125.20	-27.06	peak
2	5850.000	10.07	34.61	38.11	53.14	59.71	122.20	-62.49	peak
3	5860.000	10.10	34.62	38.11	52.22	58.83	109.40	-50.57	peak




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM180200138802

Page: 577 of 817

Test mode:	802.11ac(HT20)	Frequency(MHz):	5180	Peak	Vertical
------------	----------------	-----------------	------	------	----------

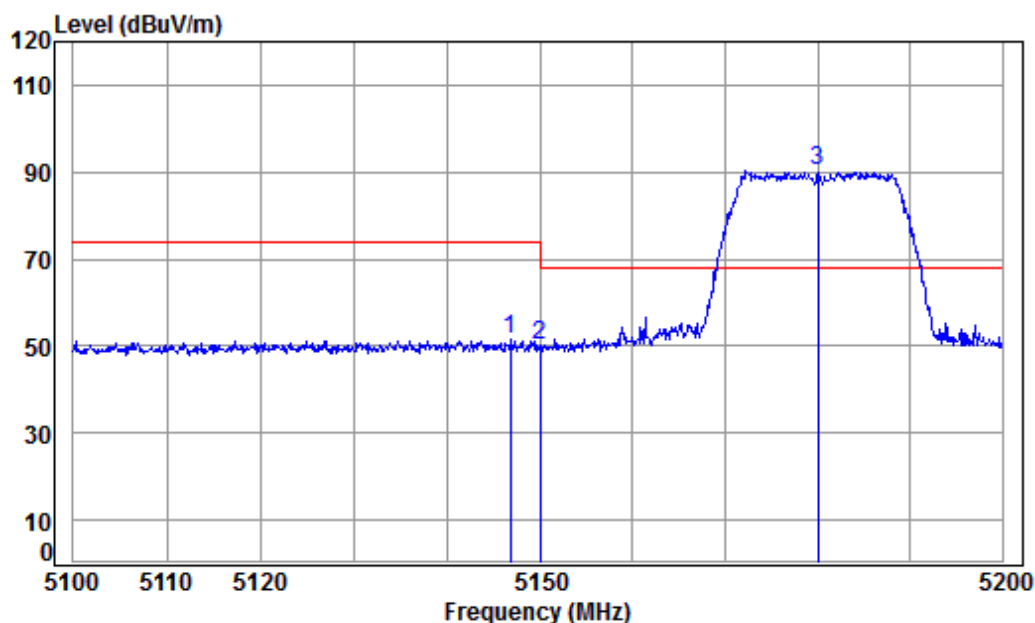

Condition: 3m VERTICAL

Job No : 0217RG

Mode : 5180 Band edge

: Ant 2 5G WIFI 11AC CH36

		Cable	Ant	Preamp	Read		Limit	Over	
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	5146.858	8.32	34.47	38.18	46.81	51.42	74.00	-22.58	Peak
2	5149.980	8.33	34.47	38.18	45.79	50.41	74.00	-23.59	Peak
3 pp	5180.000	8.37	34.46	38.18	85.51	90.16	68.20	21.96	Peak




SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch

Report No.: SZEM180200138802

Page: 578 of 817

Test mode:	802.11ac(HT20)	Frequency(MHz):	5180	Average	Vertical
------------	----------------	-----------------	------	---------	----------

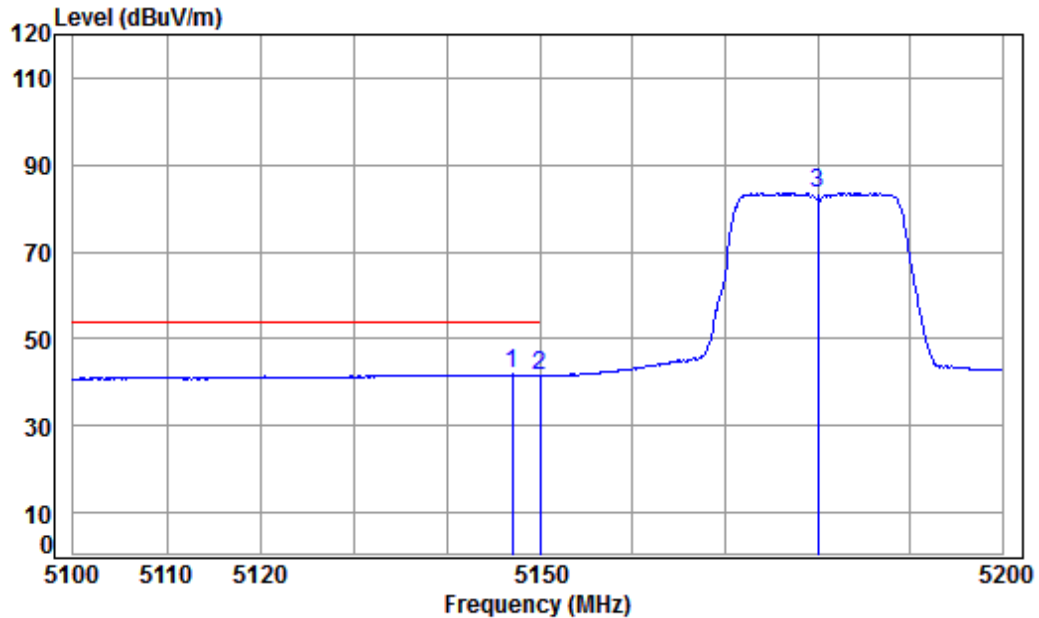

Condition: 3m VERTICAL

Job No : 0217RG

Mode : 5180 Band edge

: Ant 2 5G WIFI 11AC CH36

		Cable	Ant	Preamp	Read	Limit	Over	
Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1 pp 5147.058	8.32	34.47	38.18	37.15	41.76	54.00	-12.24	Average
2 5149.980	8.33	34.47	38.18	36.95	41.57	54.00	-12.43	Average
3 5180.000	8.37	34.46	38.18	78.79	83.44	-----	-----	Average




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM180200138802

Page: 579 of 817

Test mode:	802.11ac(HT20)	Frequency(MHz):	5180	Peak	Horizontal
------------	----------------	-----------------	------	------	------------

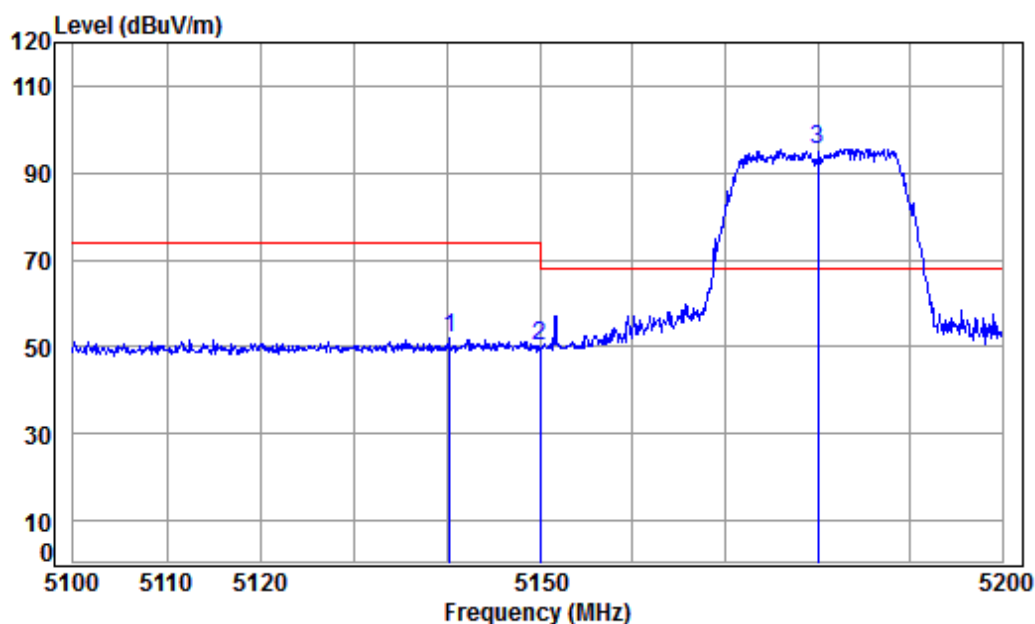

Condition: 3m HORIZONTAL

Job No : 0217RG

Mode : 5180 Band edge

: Ant 2 5G WIFI 11AC CH36

		Cable	Ant	Preamp	Read		Limit	Over	
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	5140.266	8.31	34.47	38.18	47.57	52.17	74.00	-21.83	peak
2	5149.980	8.33	34.47	38.18	45.74	50.36	74.00	-23.64	peak
3 pp	5180.000	8.37	34.46	38.18	90.91	95.56	68.20	27.36	peak




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM180200138802

Page: 580 of 817

Test mode:	802.11ac(HT20)	Frequency(MHz):	5180	Average	Horizontal
------------	----------------	-----------------	------	---------	------------

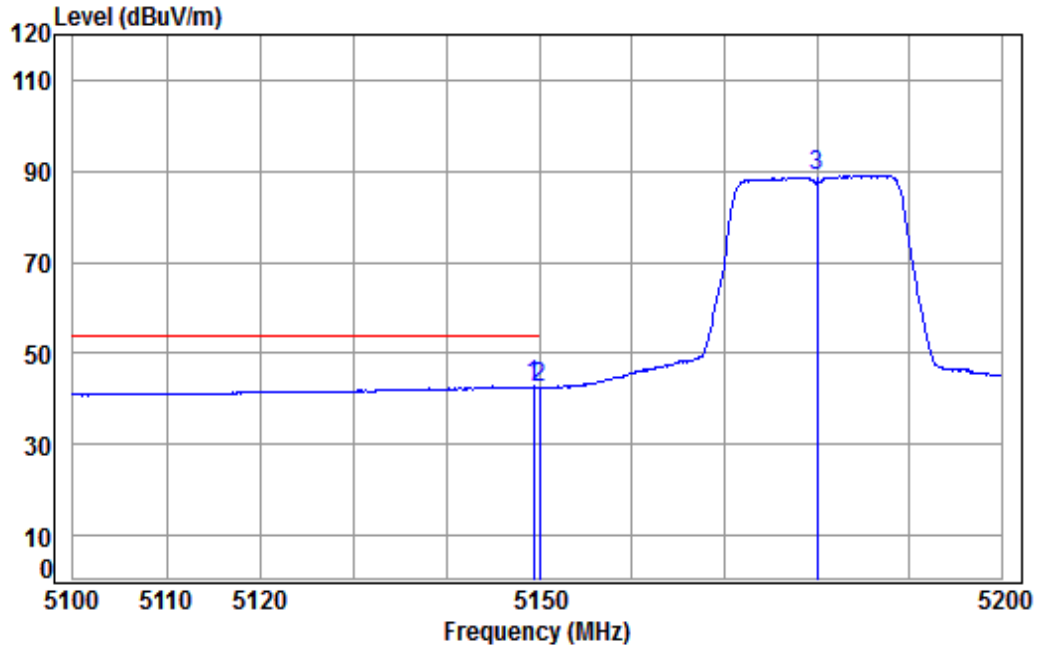

Condition: 3m HORIZONTAL

Job No : 0217RG

Mode : 5180 Band edge

: Ant 2 5G WIFI 11AC CH36

		Cable	Ant	Preamp	Read		Limit	Over	
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1 pp	5149.357	8.32	34.47	38.18	38.13	42.74	54.00	-11.26	Average
2	5149.980	8.33	34.47	38.18	37.93	42.55	54.00	-11.45	Average
3	5180.000	8.37	34.46	38.18	84.43	89.08	-----	-----	Average




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM180200138802

Page: 581 of 817

Test mode:	802.11ac(HT20)	Frequency(MHz):	5240	Peak	Vertical
------------	----------------	-----------------	------	------	----------

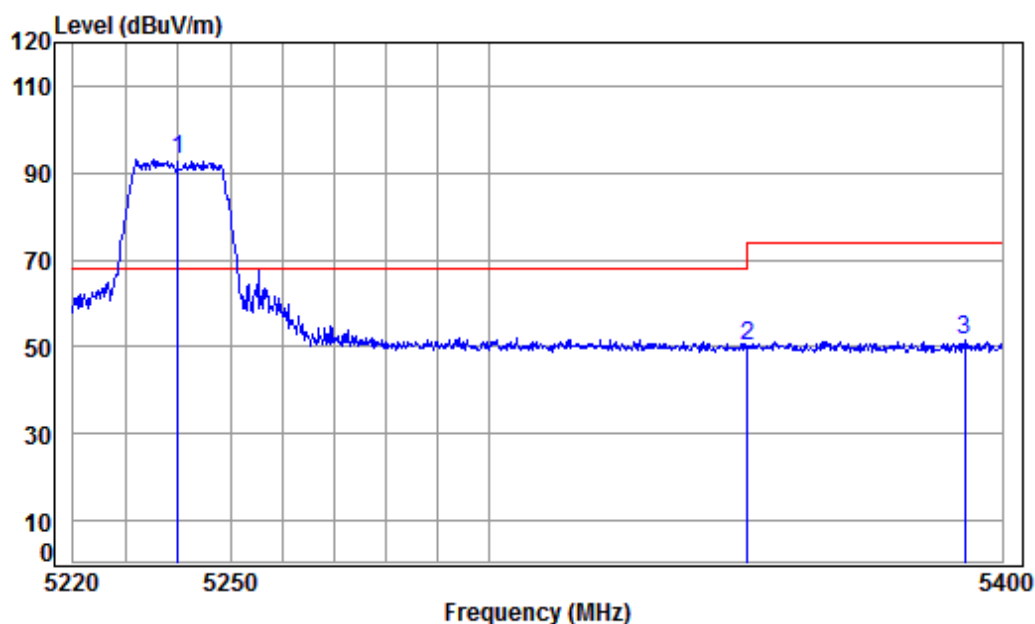

Condition: 3m VERTICAL

Job No : 0217RG

Mode : 5240 Band edge

: Ant 2 5G WIFI 11AC CH48

		Cable	Ant	Preamp	Read	Limit	Over	
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1	pp 5240.000	8.46	34.45	38.17	88.24	92.98	68.20	24.78 Peak
2	5350.020	8.63	34.43	38.16	45.51	50.41	74.00	-23.59 Peak
3	5392.682	8.69	34.42	38.16	46.40	51.35	74.00	-22.65 Peak




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM180200138802

Page: 582 of 817

Test mode:	802.11ac(HT20)	Frequency(MHz):	5240	Average	Vertical
------------	----------------	-----------------	------	---------	----------

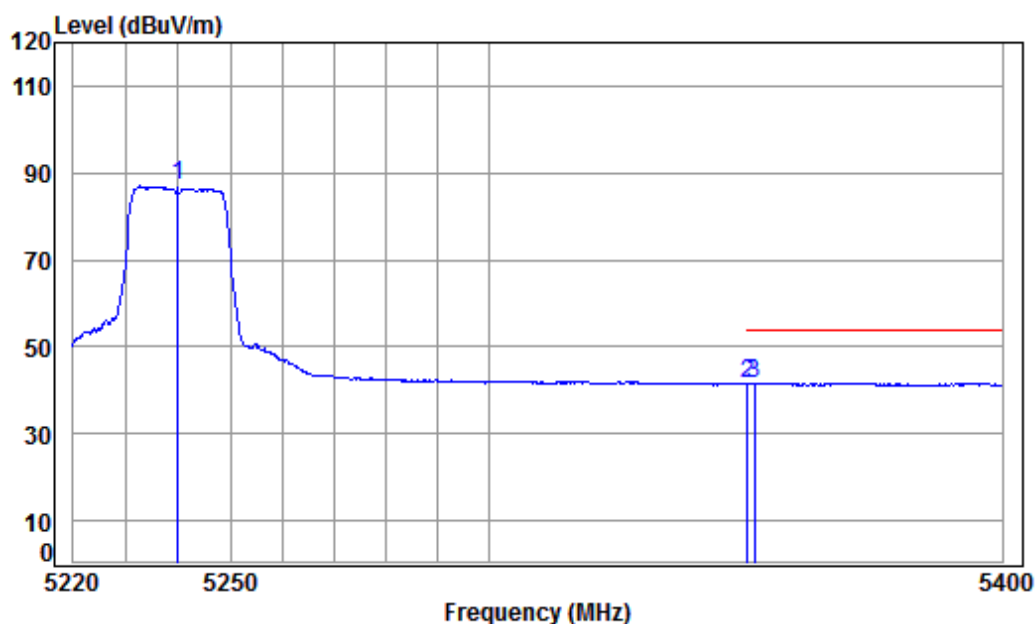

Condition: 3m VERTICAL

Job No : 0217RG

Mode : 5240 Band edge

: Ant 2 5G WIFI 11AC CH48

	Freq	Cable Loss	Ant Factor	Preamplifier Factor	Read Level	Limit Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	5240.000	8.46	34.45	38.17	82.19	86.93	-----	-----	Average
2	5350.020	8.63	34.43	38.16	36.71	41.61	54.00	-12.39	Average
3 pp	5351.341	8.63	34.43	38.16	36.74	41.64	54.00	-12.36	Average




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM180200138802

Page: 583 of 817

Test mode:	802.11ac(HT20)	Frequency(MHz):	5240	Peak	Horizontal
------------	----------------	-----------------	------	------	------------

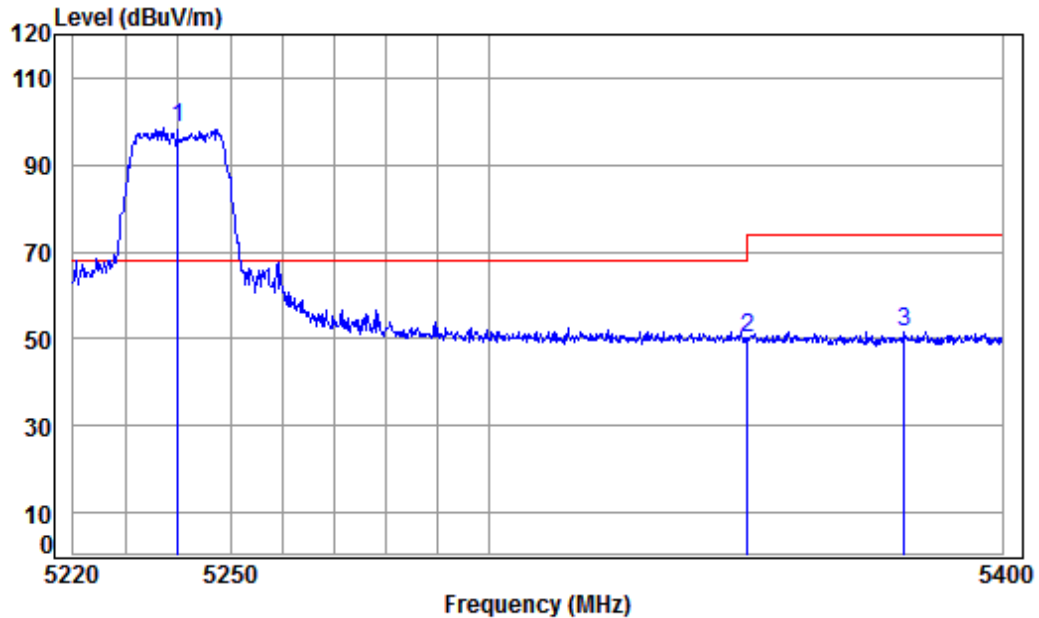

Condition: 3m HORIZONTAL

Job No : 0217RG

Mode : 5240 Band edge

: Ant 2 5G WIFI 11AC CH48

		Cable	Ant	Preamp	Read	Limit	Over	
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1	pp 5240.000	8.46	34.45	38.17	93.66	98.40	68.20	30.20 peak
2	5350.020	8.63	34.43	38.16	45.32	50.22	74.00	-23.78 peak
3	5380.812	8.68	34.42	38.16	46.82	51.76	74.00	-22.24 peak




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM180200138802

Page: 584 of 817

Test mode:	802.11ac(HT20)	Frequency(MHz):	5240	Average	Horizontal
------------	----------------	-----------------	------	---------	------------

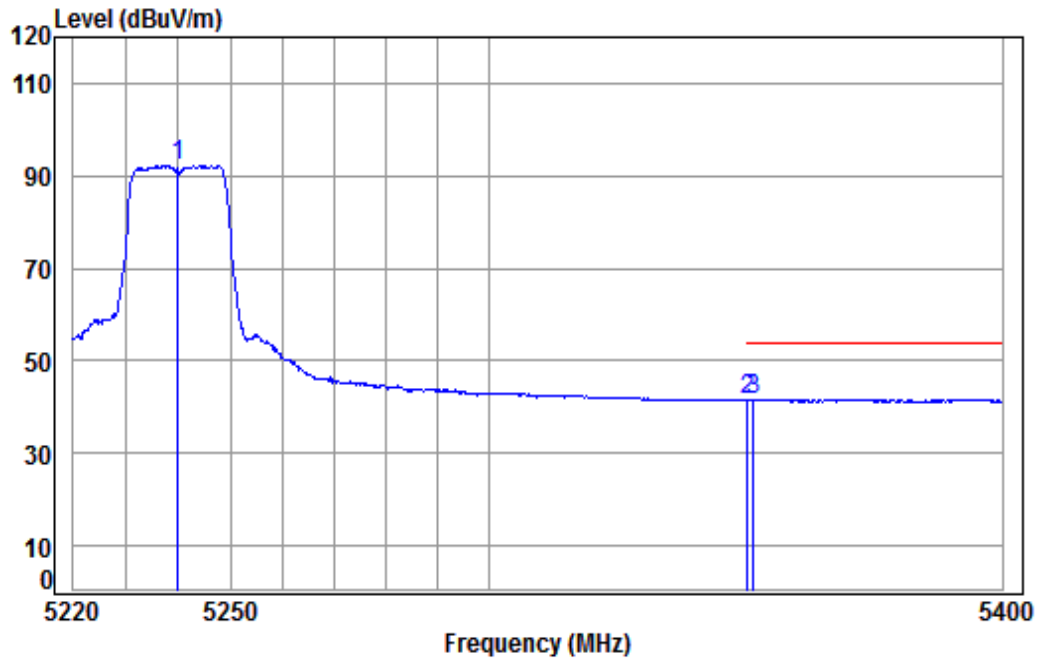

Condition: 3m HORIZONTAL

Job No : 0217RG

Mode : 5240 Band edge

: Ant 2 5G WIFI 11AC CH48

		Cable	Ant	Preamp	Read		Limit	Over	
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	5240.000	8.46	34.45	38.17	87.36	92.10	-----	-----	Average
2 pp	5350.020	8.63	34.43	38.16	36.80	41.70	54.00	-12.30	Average
3	5351.160	8.63	34.43	38.16	36.77	41.67	54.00	-12.33	Average




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM180200138802

Page: 585 of 817

Test mode:	802.11ac(HT20)	Frequency(MHz):	5260	Peak	Vertical
------------	----------------	-----------------	------	------	----------

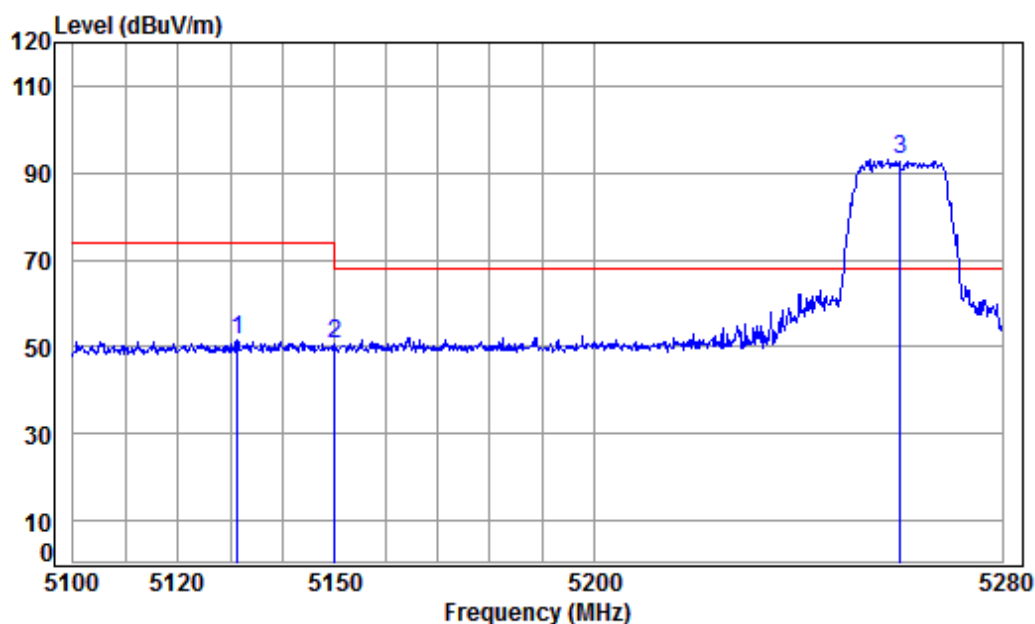

Condition: 3m VERTICAL

Job No : 0217RG

Mode : 5260 Band edge

: Ant 2 5G WIFI 11AC CH52

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Limit Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	5131.407	8.30	34.47	38.19	46.91	51.49	74.00	-22.51	Peak
2	5149.980	8.33	34.47	38.18	45.83	50.45	74.00	-23.55	Peak
3 pp	5260.000	8.49	34.45	38.17	88.13	92.90	68.20	24.70	Peak




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM180200138802

Page: 586 of 817

Test mode:	802.11ac(HT20)	Frequency(MHz):	5260	Average	Vertical
------------	----------------	-----------------	------	---------	----------

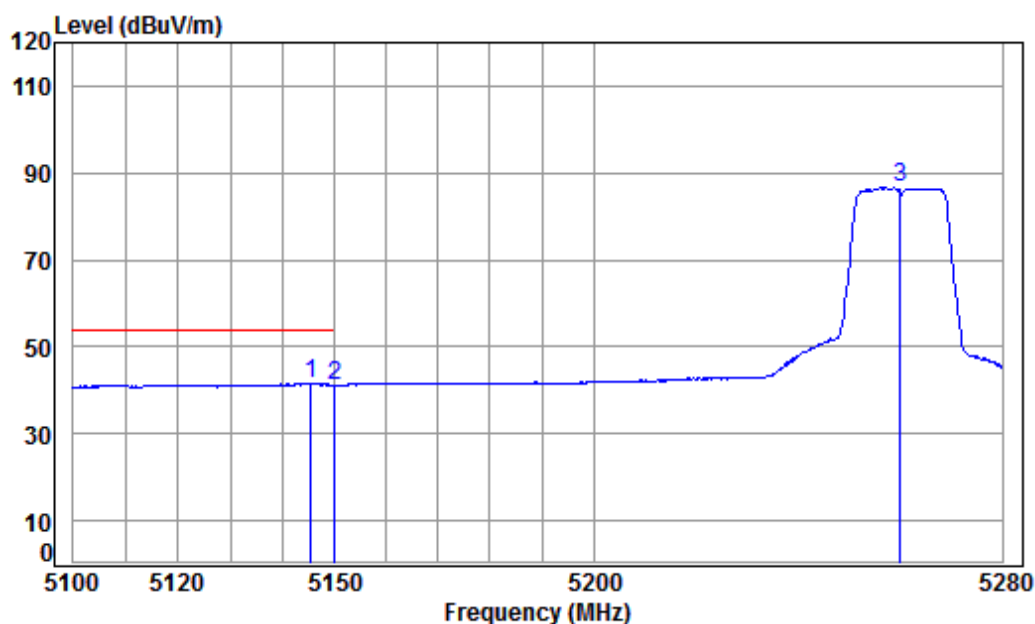

Condition: 3m VERTICAL

Job No : 0217RG

Mode : 5260 Band edge

: Ant 2 5G WIFI 11AC CH52

		Cable	Ant	Preamp	Read	Limit	Over	
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1 pp	5145.487	8.32	34.47	38.18	36.80	41.41	54.00	-12.59 Average
2	5149.980	8.33	34.47	38.18	36.64	41.26	54.00	-12.74 Average
3	5260.000	8.49	34.45	38.17	81.87	86.64	-----	----- Average




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM180200138802

Page: 587 of 817

Test mode:	802.11ac(HT20)	Frequency(MHz):	5260	Peak	Horizontal
------------	----------------	-----------------	------	------	------------

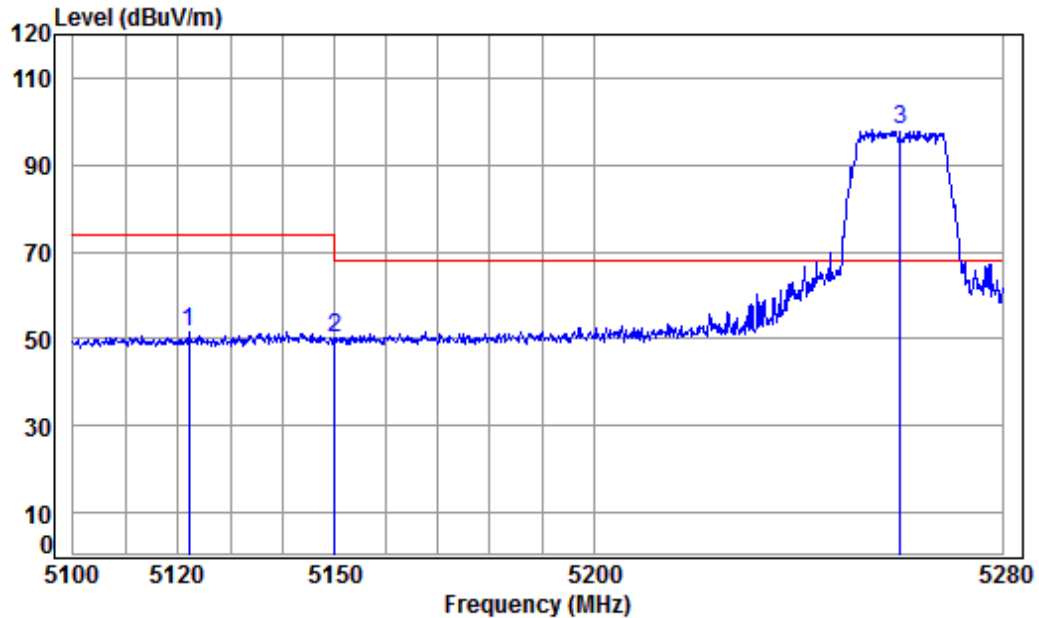

Condition: 3m HORIZONTAL

Job No : 0217RG

Mode : 5260 Band edge

: Ant 2 5G WIFI 11AC CH52

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	5122.160	8.28	34.47	38.19	47.14	51.70	74.00	-22.30	peak
2	5149.980	8.33	34.47	38.18	45.44	50.06	74.00	-23.94	peak
3 pp	5260.000	8.49	34.45	38.17	93.24	98.01	68.20	29.81	peak




SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch

Report No.: SZEM180200138802

Page: 588 of 817

Test mode:	802.11ac(HT20)	Frequency(MHz):	5260	Average	Horizontal
------------	----------------	-----------------	------	---------	------------

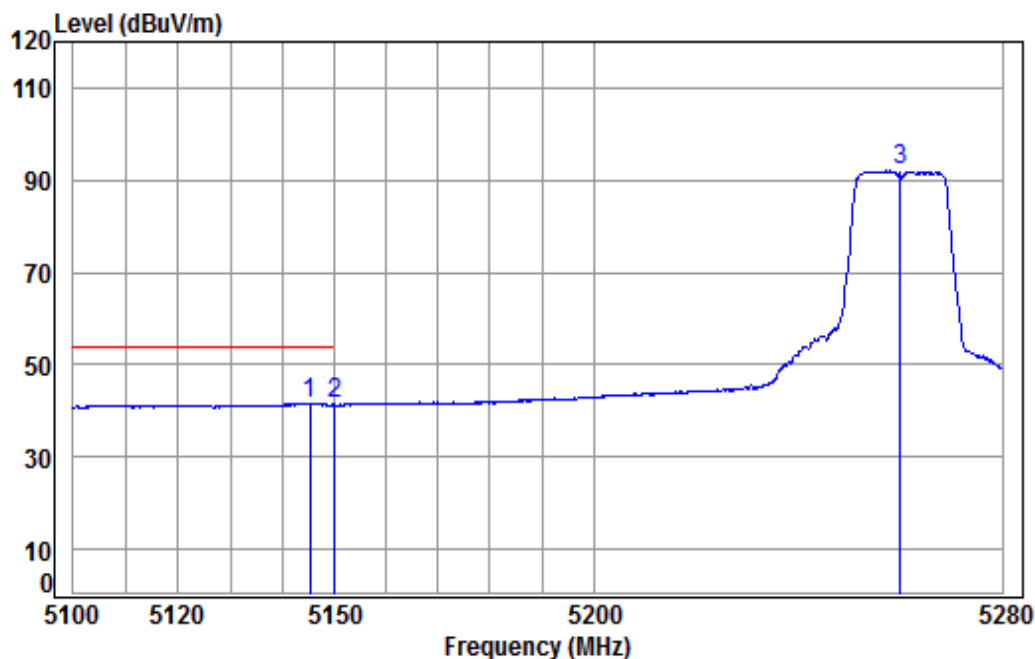

Condition: 3m HORIZONTAL

Job No : 0217RG

Mode : 5260 Band edge

: Ant 2 5G WIFI 11AC CH52

		Cable	Ant	Preamp	Read		Limit	Over	
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1 pp	5145.309	8.32	34.47	38.18	36.97	41.58	54.00	-12.42	Average
2	5149.980	8.33	34.47	38.18	36.68	41.30	54.00	-12.70	Average
3	5260.000	8.49	34.45	38.17	87.20	91.97	-----	-----	Average




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM180200138802

Page: 589 of 817

Test mode:	802.11ac(HT20)	Frequency(MHz):	5320	Peak	Vertical
------------	----------------	-----------------	------	------	----------

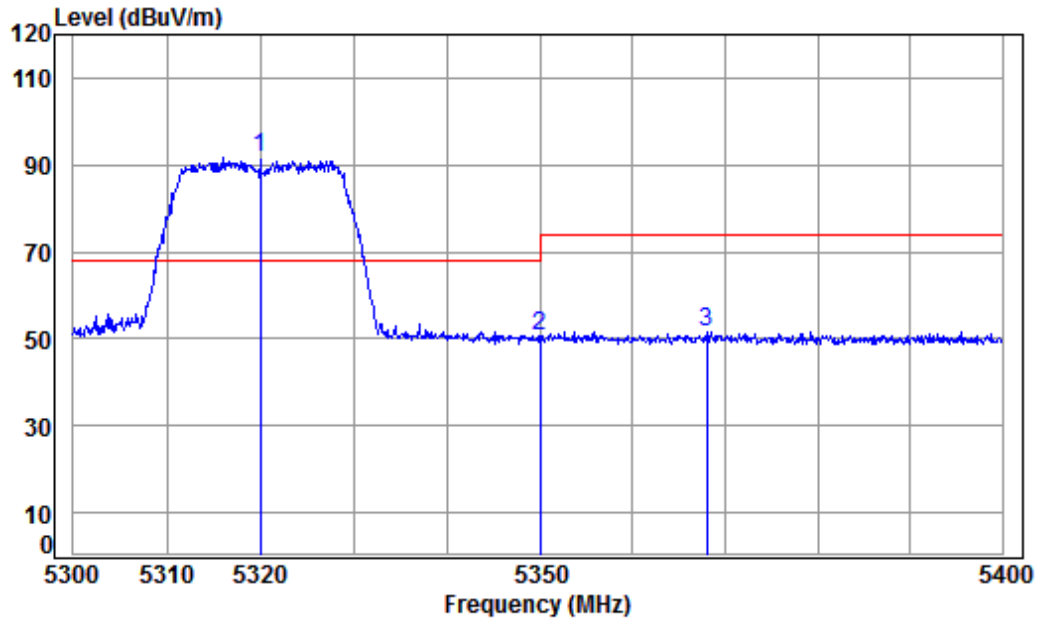

Condition: 3m VERTICAL

Job No : 0217RG

Mode : 5320 Band edge

: Ant 2 5G WIFI 11AC CH64

		Cable	Ant	Preamp	Read	Limit	Over	
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1 pp	5320.000	8.58	34.43	38.17	86.93	91.77	68.20	23.57 Peak
2	5350.020	8.63	34.43	38.16	45.66	50.56	74.00	-23.44 Peak
3	5367.997	8.66	34.43	38.16	46.71	51.64	74.00	-22.36 Peak




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM180200138802

Page: 590 of 817

Test mode:	802.11ac(HT20)	Frequency(MHz):	5320	Average	Vertical
------------	----------------	-----------------	------	---------	----------

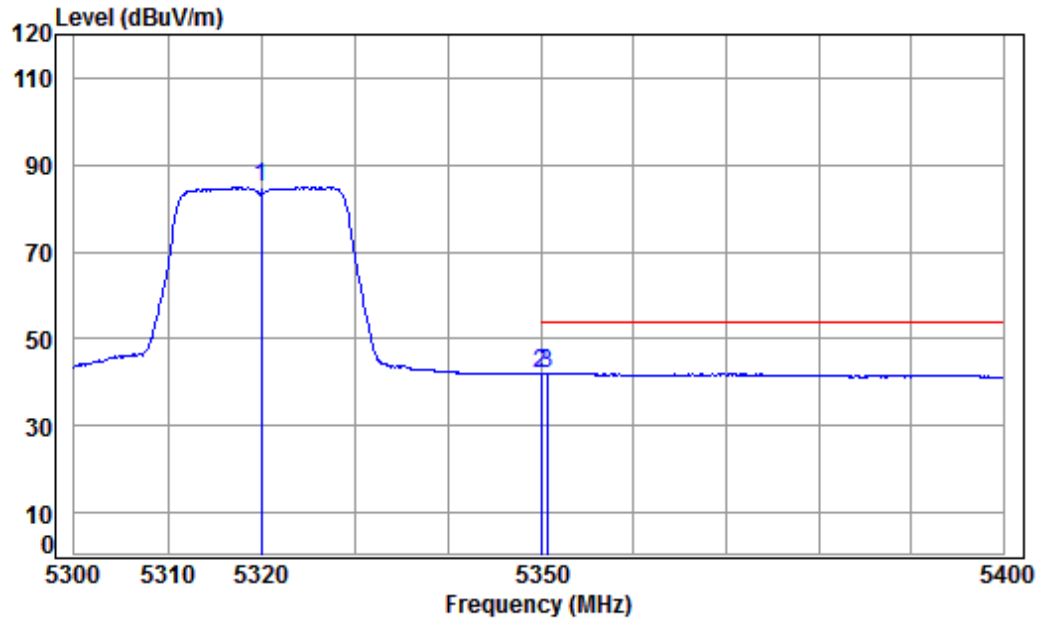

Condition: 3m VERTICAL

Job No : 0217RG

Mode : 5320 Band edge

: Ant 2 5G WIFI 11AC CH64

	Freq	Cable Loss	Ant Factor	Preamplifier Factor	Read Level	Limit Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	5320.000	8.58	34.43	38.17	80.12	84.96	-----	-----	Average
2	5350.020	8.63	34.43	38.16	37.19	42.09	54.00	-11.91	Average
3 pp	5350.667	8.63	34.43	38.16	37.20	42.10	54.00	-11.90	Average




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM180200138802

Page: 591 of 817

Test mode:	802.11ac(HT20)	Frequency(MHz):	5320	Peak	Horizontal
------------	----------------	-----------------	------	------	------------

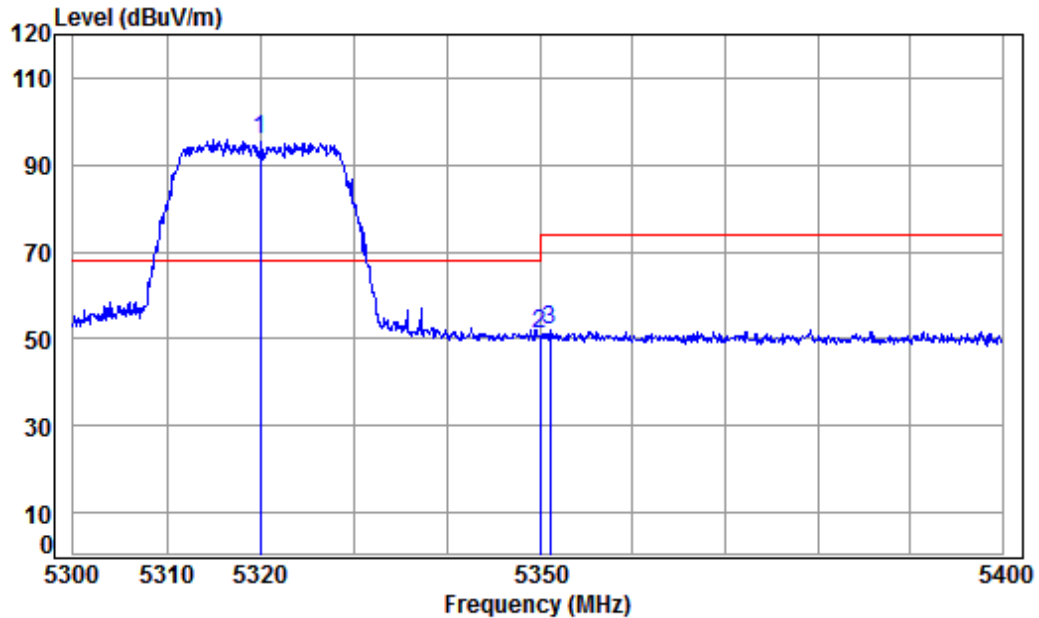

Condition: 3m HORIZONTAL

Job No : 0217RG

Mode : 5320 Band edge

: Ant 2 5G WIFI 11AC CH64

		Cable	Ant	Preamp	Read	Limit	Over	
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1	pp 5320.000	8.58	34.43	38.17	90.81	95.65	68.20	27.45 peak
2	5350.020	8.63	34.43	38.16	46.38	51.28	74.00	-22.72 peak
3	5351.066	8.63	34.43	38.16	47.07	51.97	74.00	-22.03 peak




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM180200138802

Page: 592 of 817

Test mode:	802.11ac(HT20)	Frequency(MHz):	5320	Average	Horizontal
------------	----------------	-----------------	------	---------	------------

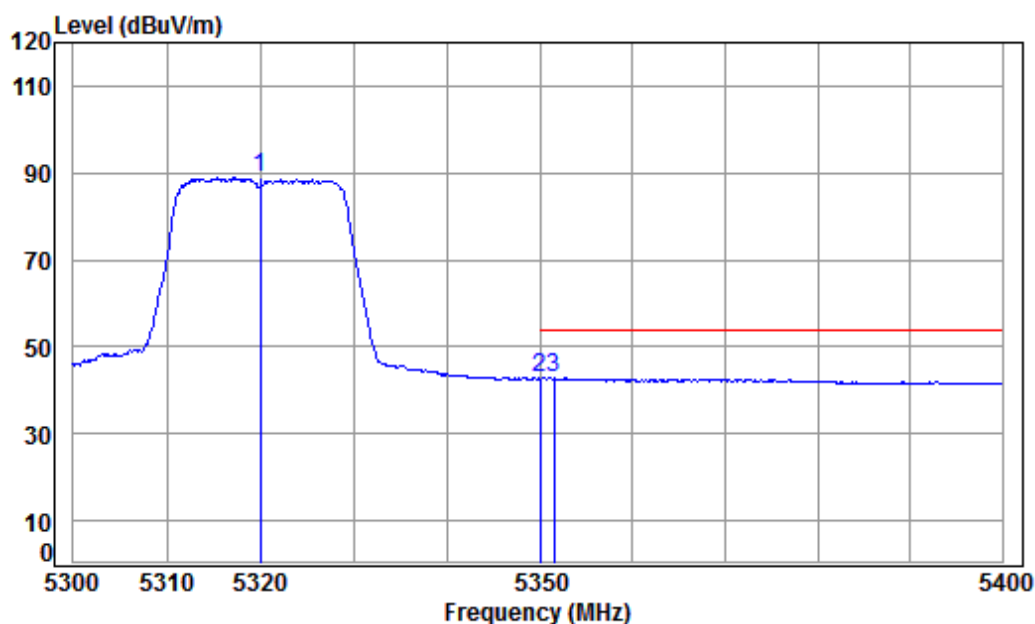

Condition: 3m HORIZONTAL

Job No : 0217RG

Mode : 5320 Band edge

: Ant 2 5G WIFI 11AC CH64

	Freq	Cable Loss	Ant Factor	Preamplifier Factor	Read Level	Limit Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	5320.000	8.58	34.43	38.17	83.93	88.77	-----	-----	Average
2	5350.020	8.63	34.43	38.16	37.81	42.71	54.00	-11.29	Average
3 pp	5351.566	8.63	34.43	38.16	37.87	42.77	54.00	-11.23	Average




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM180200138802

Page: 593 of 817

Test mode:	802.11ac(HT20)	Frequency(MHz):	5500	Peak	Vertical
------------	----------------	-----------------	------	------	----------

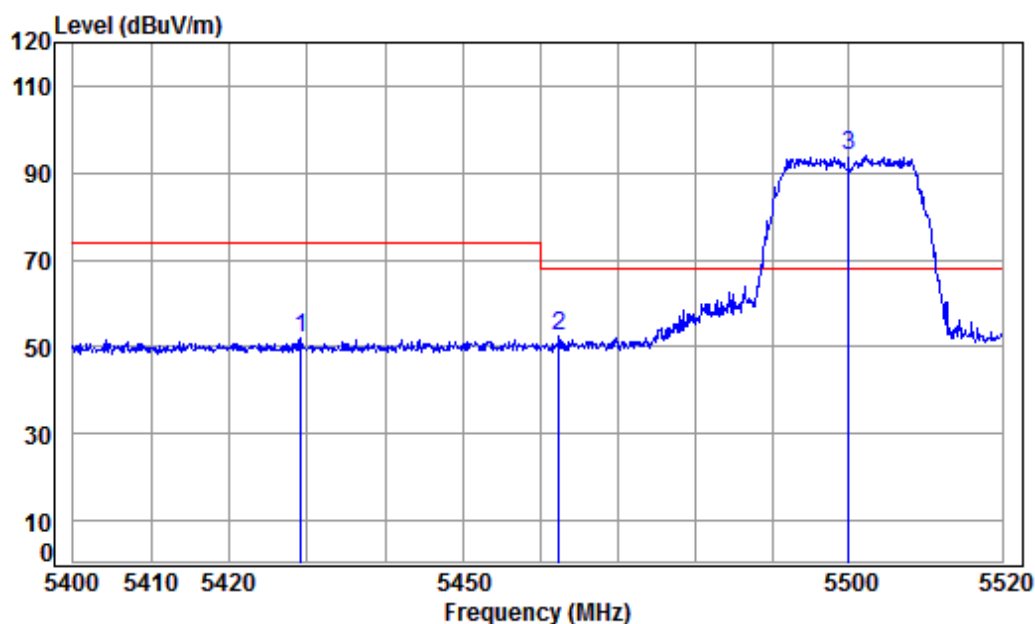

Condition: 3m VERTICAL

Job No : 0217RG

Mode : 5500 Band edge

: Ant 2 5G WIFI 11AC CH100

	Freq	Cable Loss	Ant Factor	Preamplifier Factor	Read Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dB	
1	5429.157	8.75	34.41	38.15	46.80	51.81	74.00	-22.19 Peak
2	5462.431	8.80	34.41	38.15	47.48	52.54	68.20	-15.66 peak
3 pp	5500.000	8.85	34.40	38.15	88.78	93.88	68.20	25.68 Peak




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM180200138802

Page: 594 of 817

Test mode:	802.11ac(HT20)	Frequency(MHz):	5500	Average	Vertical
------------	----------------	-----------------	------	---------	----------

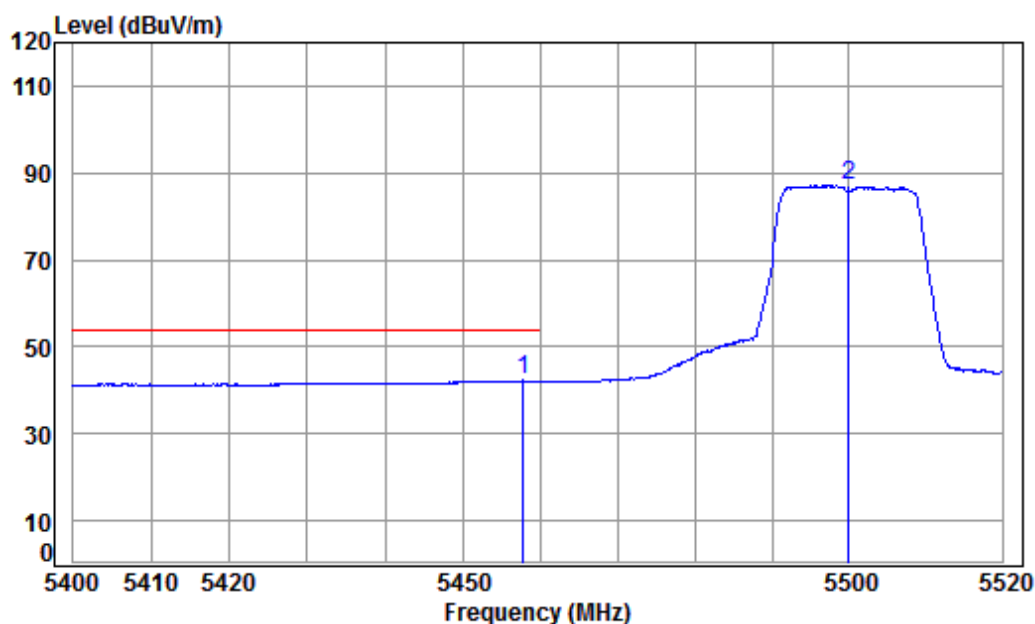

Condition: 3m VERTICAL

Job No : 0217RG

Mode : 5500 Band edge

: Ant 2 5G WIFI 11AC CH100

		Cable	Ant	Preamp	Read		Limit	Over	
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	pp 5457.750	8.79	34.41	38.15	37.17	42.22	54.00	-11.78	Average
2	5500.000	8.85	34.40	38.15	81.99	87.09	-----	-----	Average




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM180200138802

Page: 595 of 817

Test mode:	802.11ac(HT20)	Frequency(MHz):	5500	Peak	Horizontal
------------	----------------	-----------------	------	------	------------

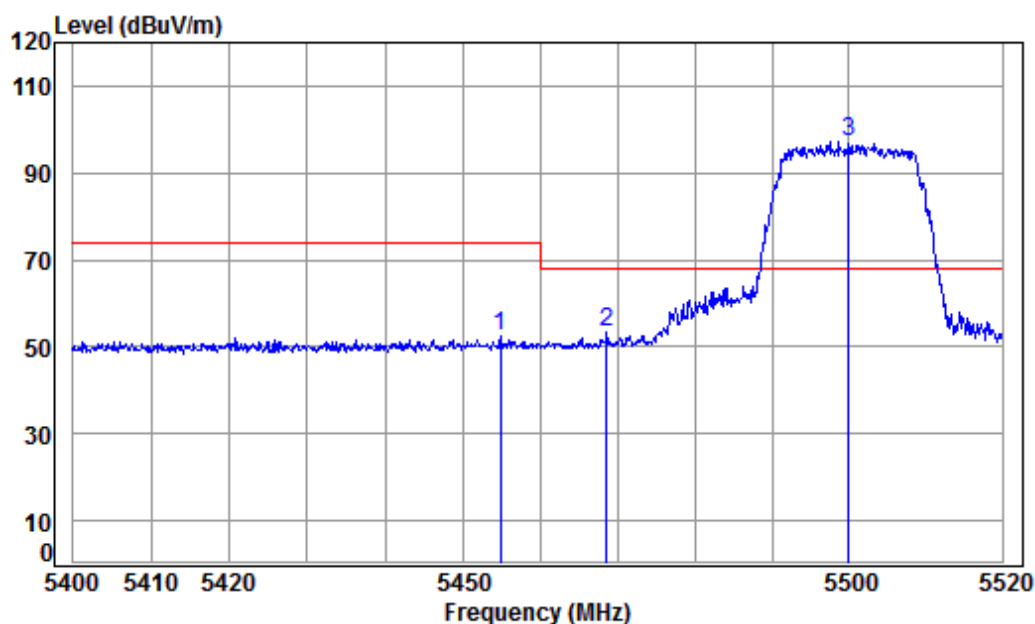

Condition: 3m HORIZONTAL

Job No : 0217RG

Mode : 5500 Band edge

: Ant 2 5G WIFI 11AC CH100

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	5454.873	8.78	34.41	38.15	47.56	52.60	74.00	-21.40	peak
2	5468.557	8.80	34.41	38.15	48.12	53.18	68.20	-15.02	peak
3 pp	5500.000	8.85	34.40	38.15	91.92	97.02	68.20	28.82	peak




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM180200138802

Page: 596 of 817

Test mode:	802.11ac(HT20)	Frequency(MHz):	5500	Average	Horizontal
------------	----------------	-----------------	------	---------	------------

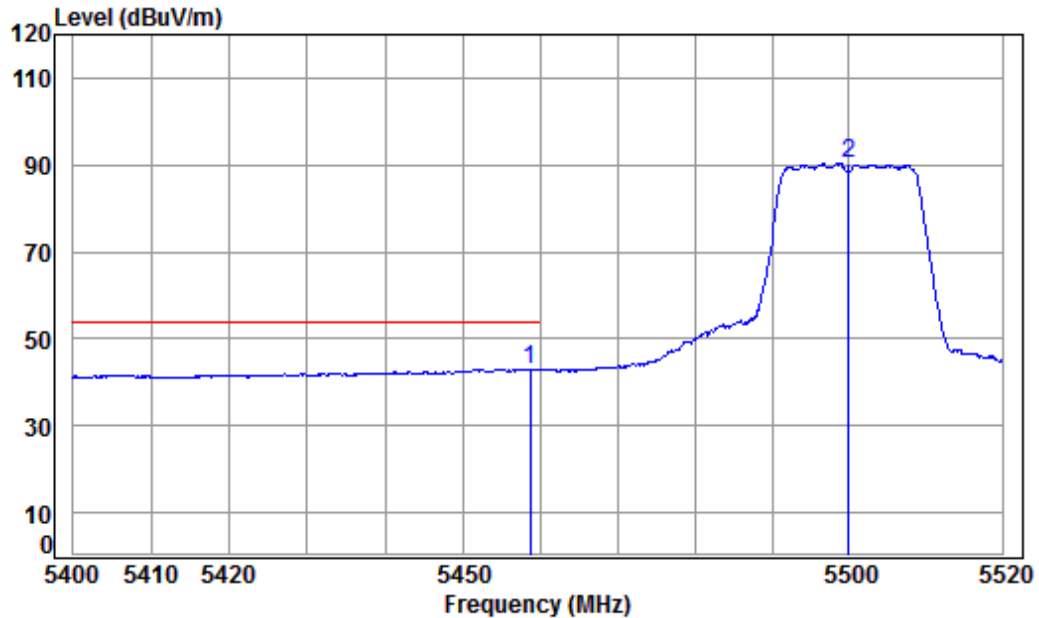

Condition: 3m HORIZONTAL

Job No : 0217RG

Mode : 5500 Band edge

: Ant 2 5G WIFI 11AC CH100

		Cable	Ant	Preamp	Read	Limit	Over	
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1 pp	5458.710	8.79	34.41	38.15	37.96	43.01	54.00	-10.99 Average
2	5500.000	8.85	34.40	38.15	85.14	90.24	-----	----- Average




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM180200138802

Page: 597 of 817

Test mode:	802.11ac(HT20)	Frequency(MHz):	5700	Peak	Vertical
------------	----------------	-----------------	------	------	----------

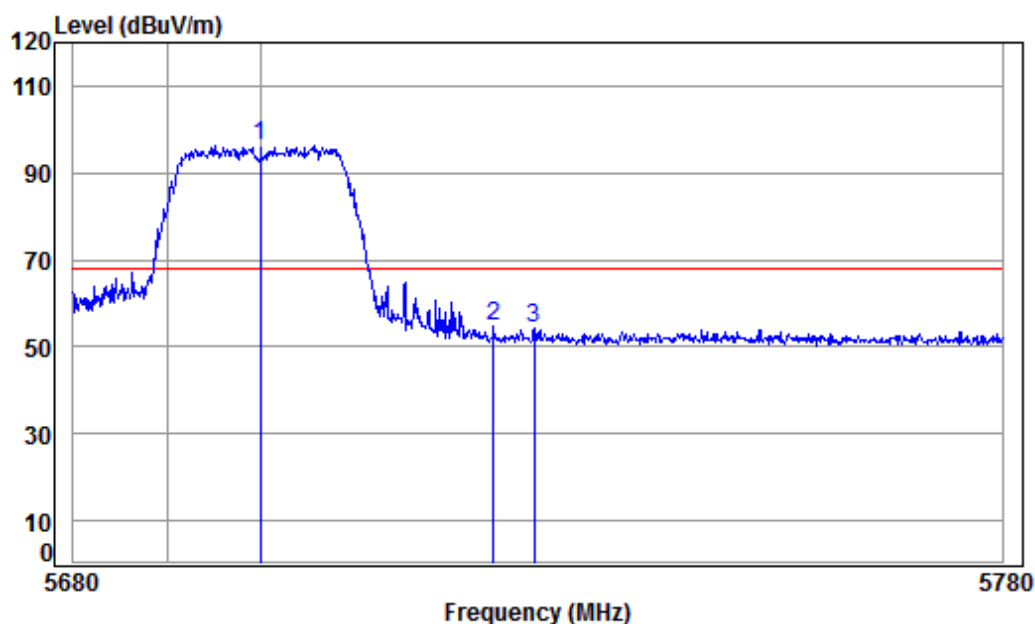

Condition: 3m VERTICAL

Job No : 0217RG

Mode : 5700 Band edge

: Ant 2 5G WIFI 11AC CH140

		Cable	Ant	Preamp	Read	Limit	Over	
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1	pp 5700.000	9.56	34.52	38.13	90.10	96.05	68.20	27.85 Peak
2	5725.000	9.64	34.54	38.13	48.80	54.85	68.20	-13.35 Peak
3	5729.382	9.66	34.54	38.13	48.15	54.22	68.20	-13.98 Peak




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM180200138802

Page: 598 of 817

Test mode:	802.11ac(HT20)	Frequency(MHz):	5700	Peak	Horizontal
------------	----------------	-----------------	------	------	------------

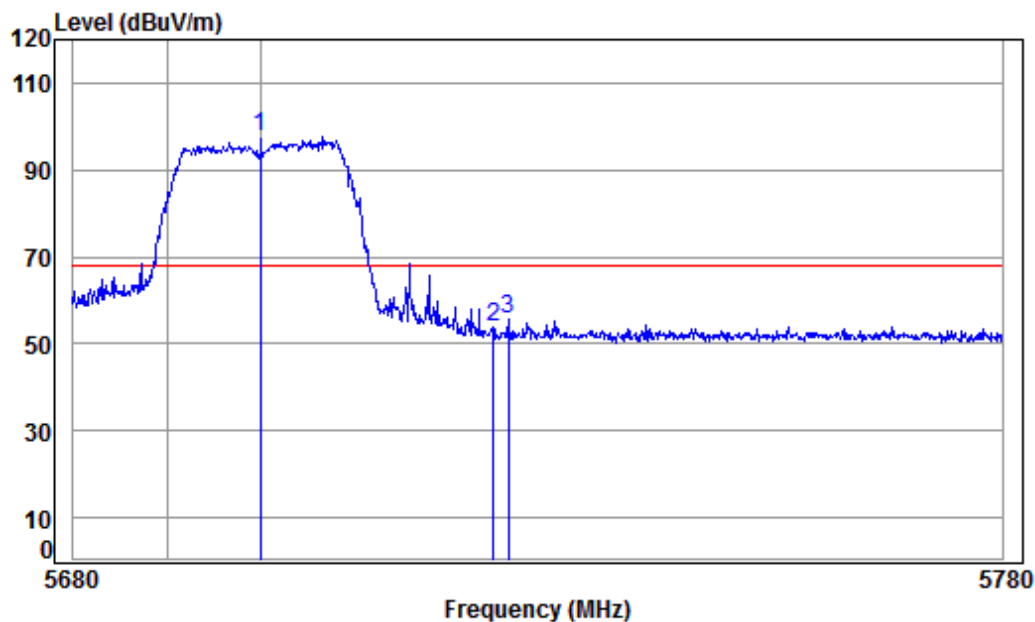

Condition: 3m HORIZONTAL

Job No : 0217RG

Mode : 5700 Band edge

: Ant 2 5G WIFI 11AC CH140

		Cable	Ant	Preamp	Read	Limit	Over	
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1	pp 5700.000	9.56	34.52	38.13	91.50	97.45	68.20	29.25 peak
2	5725.000	9.64	34.54	38.13	47.70	53.75	68.20	-14.45 peak
3	5726.583	9.65	34.54	38.13	49.80	55.86	68.20	-12.34 peak




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM180200138802

Page: 599 of 817

Test mode:	802.11ac(HT20)	Frequency(MHz):	5745	Peak	Vertical
------------	----------------	-----------------	------	------	----------

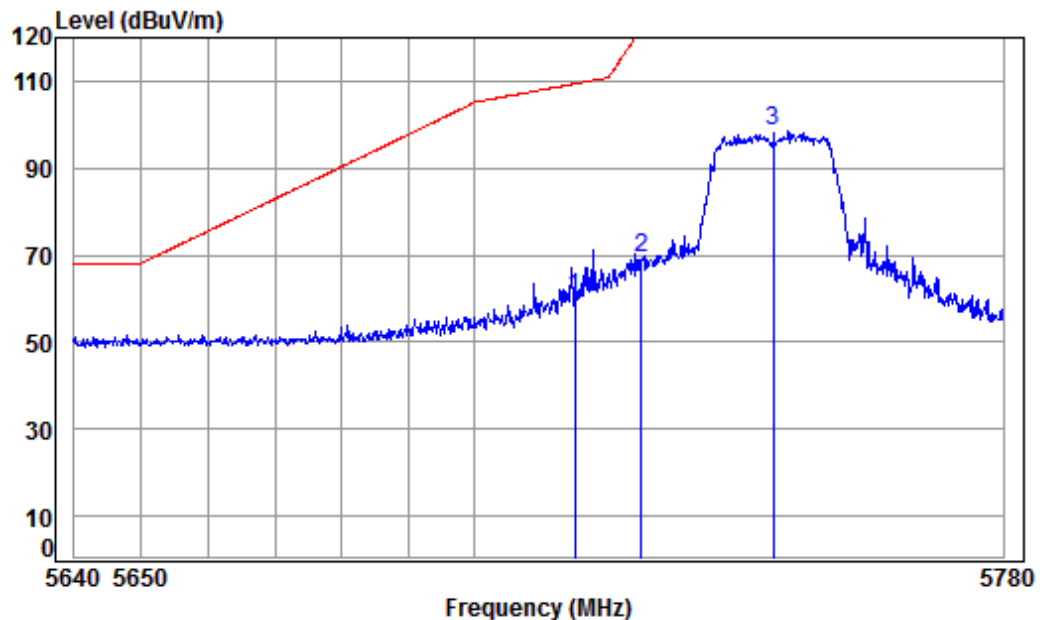

Condition: 3m VERTICAL

Job No : 0217RG

Mode : 5745 Band edge

: Ant 2 5G WIFI 11AC CH149

		Cable	Ant	Preamp	Read	Limit	Over	
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1	5715.000	9.61	34.53	38.13	54.12	60.13	109.40	-49.27 peak
2	5725.000	9.64	34.54	38.13	63.47	69.52	122.20	-52.68 peak
3 pp	5745.000	9.71	34.55	38.12	92.56	98.70	125.20	-26.50 peak




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM180200138802

Page: 600 of 817

Test mode:	802.11ac(HT20)	Frequency(MHz):	5745	Peak	Horizontal
------------	----------------	-----------------	------	------	------------

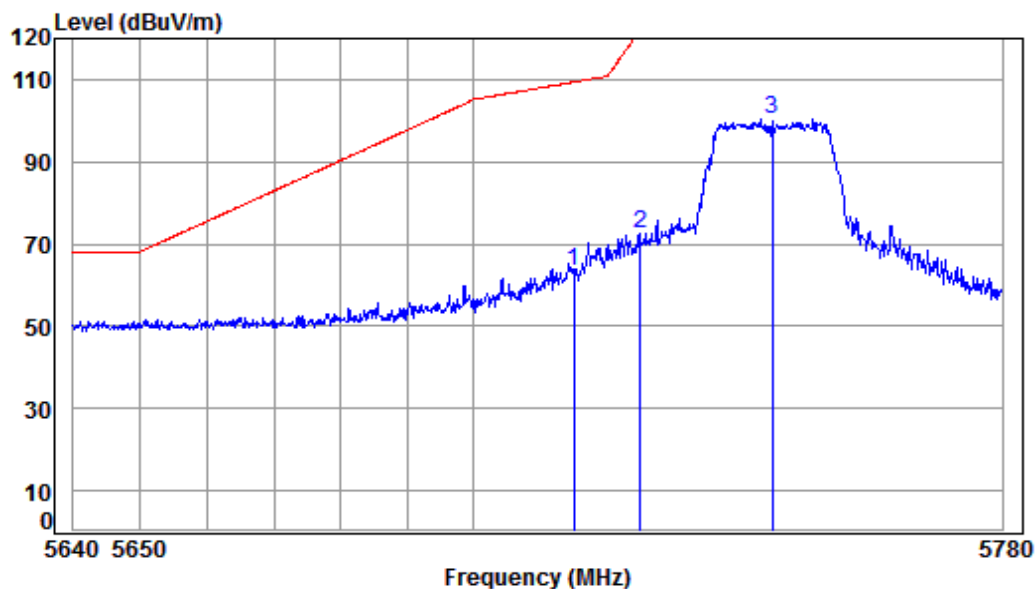

Condition: 3m HORIZONTAL

Job No : 0217RG

Mode : 5745 Band edge

: Ant 2 5G WIFI 11AC CH149

		Cable	Ant	Preamp	Read		Limit	Over	
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	5715.000	9.61	34.53	38.13	57.19	63.20	109.40	-46.20	peak
2	5725.000	9.64	34.54	38.13	66.37	72.42	122.20	-49.78	peak
3 pp	5745.000	9.71	34.55	38.12	94.37	100.51	125.20	-24.69	peak