


Appendix I: Conducted Emission at Power Port

Note: RBW = 9 kHz, VBW = 30 kHz

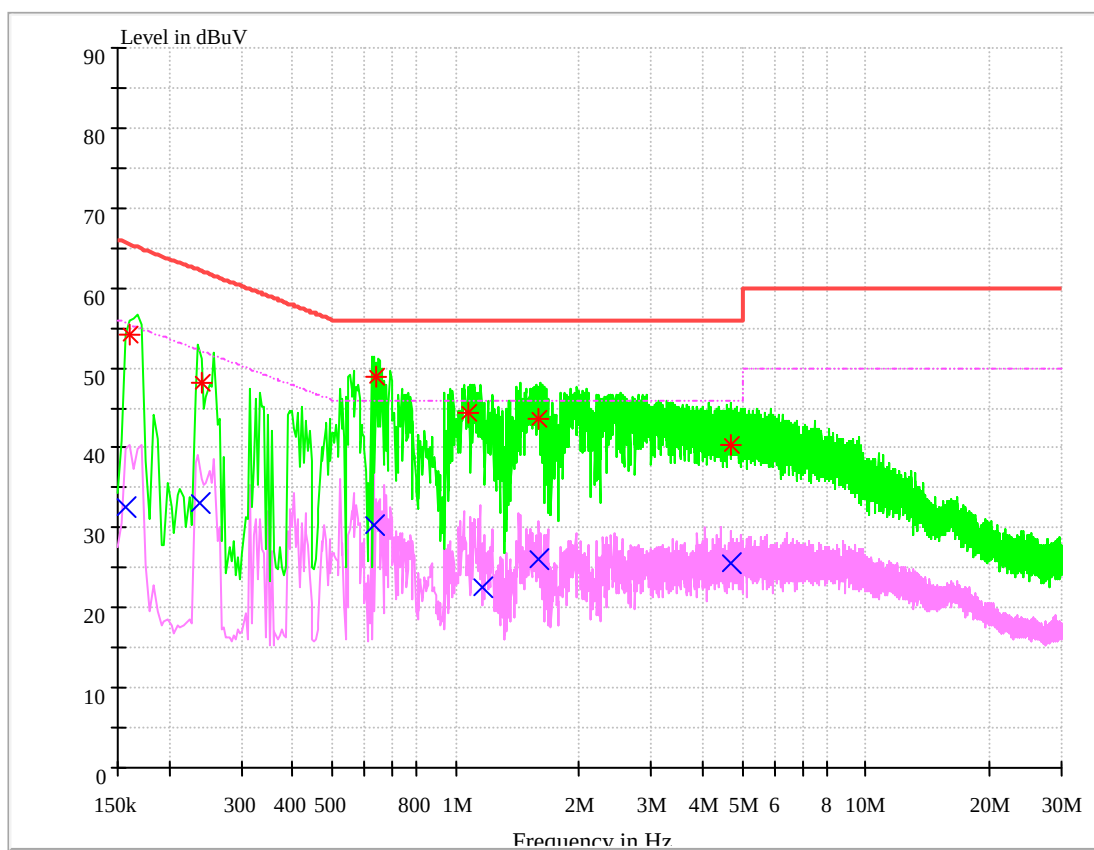

MEASUREMENT RESULT: PK Detector

Frequency (MHz)	Level (dBμV)	Limit (dBμV)	Transd. (dB)	Margin (dB)	Line	PE
0.159765	54.19	65.48	9.7	11.29	L1	FLO
0.239907	48.10	62.10	9.7	14.00	N	FLO
0.636751	48.92	56.00	9.7	7.08	L1	FLO
1.071096	44.35	56.00	9.7	11.65	L1	FLO
1.595568	43.52	56.00	9.7	12.48	N	FLO
4.698314	40.48	56.00	9.7	15.52	N	FLO

MEASUREMENT RESULT: AV Detector

Frequency (MHz)	Level (dBμV)	Limit (dBμV)	Transd. (dB)	Margin (dB)	Line	PE
0.156359	32.59	55.66	9.7	23.07	L1	FLO
0.237538	32.98	52.18	9.7	19.20	L1	FLO
0.635752	30.31	46.00	9.7	15.69	N	FLO
1.160966	22.54	46.00	9.7	23.46	N	FLO
1.587654	26.07	46.00	9.7	19.93	L1	FLO
4.699083	25.64	46.00	9.7	20.36	L1	FLO

Note:

1, Level =Reading level by receiver + Transd (Antenna factor + cable loss – preamplifier gain)

The reading level is calculated by software which is not shown in the sheet.

2, Margin=Limit - Level

END