

**Appendix B. SAR Measurement Plots**

Table of contents
GSM850 Head
GSM850 Body
GSM1900 Head
GSM1900 Body
UMTS Band II Head
UMTS Band II Body
UMTS Band V Head
UMTS Band V Body
LTE Band II Head
LTE Band II Body
LTE Band IV Head
LTE Band IV Body
LTE Band V Head
LTE Band V Body
LTE Band XII Head
LTE Band XII Body
LTE Band XXX Head
LTE Band XXX Body
WiFi 2.4G Head
WiFi 2.4G Body
WiFi 5G Head
WiFi 5G Body
BT Body

Test Laboratory: HUAWEI SAR/HAC Lab

H1611 GSM850 190CH Right touch

DUT: H1611; Type: Smart Phone; Serial: SAR2

Communication System: UID 0, HW-GSM/GPRS/EGPRS-1TS (0); Frequency: 836.6 MHz; Duty Cycle: 1:8.30042

Medium parameters used: $f = 837$ MHz; $\sigma = 0.937$ S/m; $\epsilon_r = 41.812$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY Configuration:

- ζ Probe: EX3DV4 - SN3744; ConvF(8.77, 8.77, 8.77); Calibrated: 2015-7-24;
- ζ Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- ζ Electronics: DAE4 Sn1236; Calibrated: 2015-11-23
- ζ Phantom: SAM4; Type: SAM; Serial: TP-1620
- ζ DASY52 52.8.8(1222);

Configuration/Head/Area Scan (9x14x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 0.509 W/kg



Configuration/Head/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 8.288 V/m; Power Drift = 0.10 dB

Peak SAR (extrapolated) = 0.558 W/kg

SAR(1 g) = 0.433 W/kg; SAR(10 g) = 0.333 W/kg

Maximum value of SAR (measured) = 0.512 W/kg

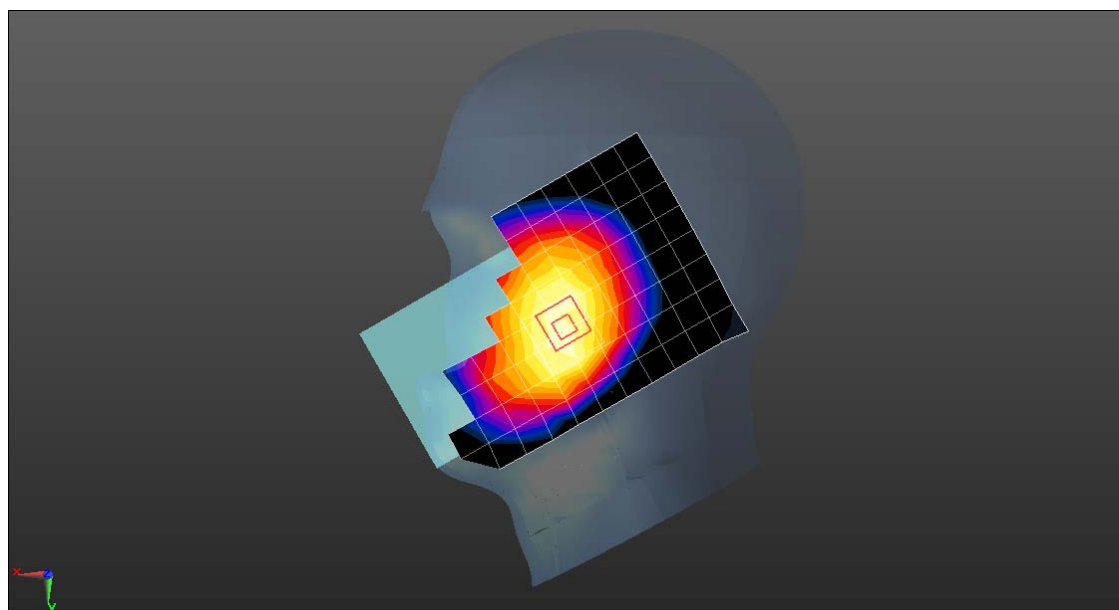

0 dB = 0.512 W/kg = -2.91 dBW/kg

Test Laboratory: HUAWEI SAR/HAC Lab

H1611 GSM850 190CH Back Side 15mm**DUT: H1611; Type: Smart Phone; Serial: SAR2**

Communication System: UID 0, HW-GSM/GPRS/EGPRS-1TS (0); Frequency: 836.6 MHz; Duty Cycle: 1:8.30042

Medium parameters used: $f = 837$ MHz; $\sigma = 0.987$ S/m; $\epsilon_r = 53.502$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- ζ Probe: EX3DV4 - SN3736; ConvF(9.08, 9.08, 9.08); Calibrated: 2016-4-26;
- ζ Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- ζ Electronics: DAE4 Sn1236; Calibrated: 2015-11-23
- ζ Phantom: SAM4; Type: SAM; Serial: TP-1620
- ζ DASY52 52.8.8(1222);

Configuration/Body/Area Scan (9x14x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 0.574 W/kg



Configuration/Body/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 22.11 V/m; Power Drift = 0.00 dB

Peak SAR (extrapolated) = 0.636 W/kg

SAR(1 g) = 0.484 W/kg; SAR(10 g) = 0.369 W/kg

Maximum value of SAR (measured) = 0.584 W/kg

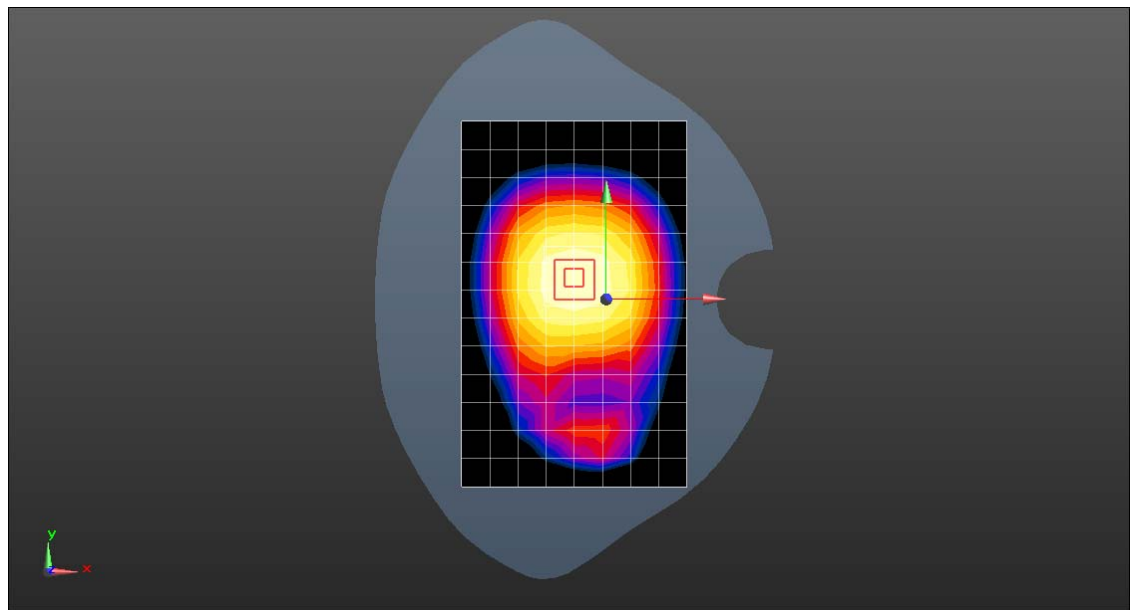

0 dB = 0.584 W/kg = -2.33 dBW/kg

Test Laboratory: HUAWEI SAR/HAC Lab

H1611 GSM850 GPRS 2TS 190CH Back Side 10mm**DUT: H1611; Type: Smart Phone; Serial: SAR2**

Communication System: UID 0, HW-GSM/GPRS/EGPRS-2TS (0); Frequency: 836.6 MHz; Duty Cycle: 1:4.10015

Medium parameters used: $f = 837$ MHz; $\sigma = 0.987$ S/m; $\epsilon_r = 53.502$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- ζ Probe: EX3DV4 - SN3736; ConvF(9.08, 9.08, 9.08); Calibrated: 2016-4-26;
- ζ Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- ζ Electronics: DAE4 Sn1236; Calibrated: 2015-11-23
- ζ Phantom: SAM4; Type: SAM; Serial: TP-1620
- ζ DASY52 52.8.8(1222);

Configuration/Body/Area Scan (9x14x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 0.700 W/kg

Configuration/Body/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 23.61 V/m; Power Drift = 0.06 dB

Peak SAR (extrapolated) = 0.923 W/kg

SAR(1 g) = 0.510 W/kg; SAR(10 g) = 0.297 W/kg

Maximum value of SAR (measured) = 0.760 W/kg



Configuration/Body/Zoom Scan (5x5x7)/Cube 1: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 23.61 V/m; Power Drift = 0.06 dB

Peak SAR (extrapolated) = 0.760 W/kg

SAR(1 g) = 0.577 W/kg; SAR(10 g) = 0.442 W/kg

Maximum value of SAR (measured) = 0.698 W/kg

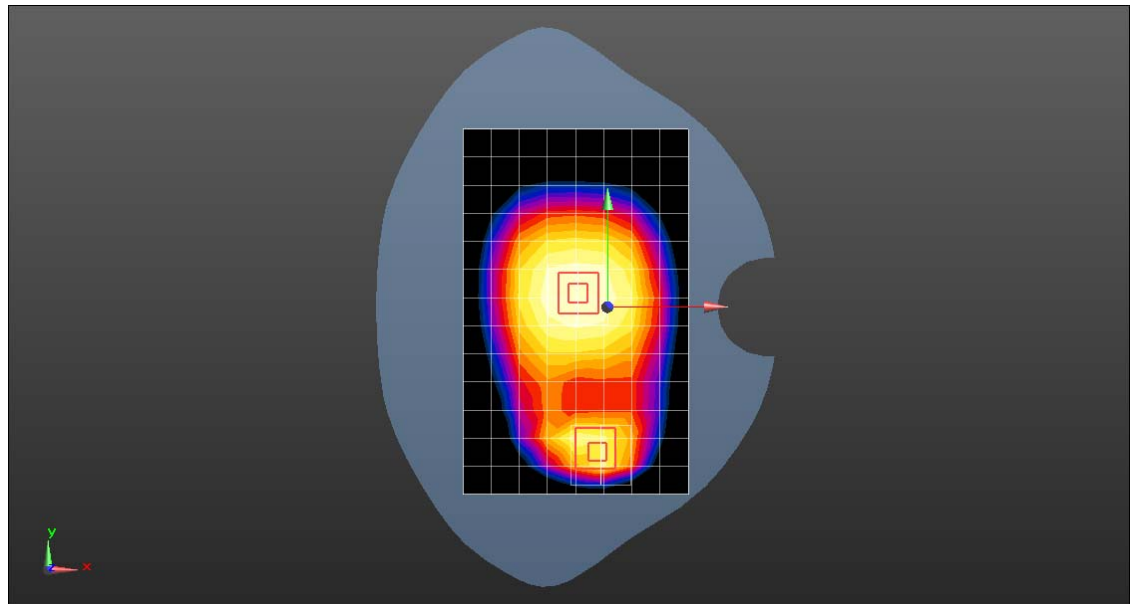

0 dB = 0.698 W/kg = -1.56 dBW/kg

Test Laboratory: HUAWEI SAR/HAC Lab

H1611 GSM1900 512CH Right touch

DUT: H1611; Type: Smart Phone; Serial: SAR2

Communication System: UID 0, HW-GSM/GPRS/EGPRS-1TS (0); Frequency: 1850.2 MHz; Duty Cycle: 1:8.30042

Medium parameters used (interpolated): $f = 1850.2$ MHz; $\sigma = 1.379$ S/m; $\epsilon_r = 40.136$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY Configuration:

- ζ Probe: EX3DV4 - SN3736; ConvF(7.45, 7.45, 7.45); Calibrated: 2016-4-26;
- ζ Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- ζ Electronics: DAE4 Sn1236; Calibrated: 2015-11-23
- ζ Phantom: SAM3; Type: SAM; Serial: TP-1597
- ζ DASY52 52.8.8(1222);

Configuration/Head/Area Scan (9x15x1): Measurement grid: dx=15mm, dy=15mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.0973 W/kg


Configuration/Head/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 1.826 V/m; Power Drift = 0.11 dB

Peak SAR (extrapolated) = 0.120 W/kg

SAR(1 g) = 0.076 W/kg; SAR(10 g) = 0.047 W/kg[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.103 W/kg

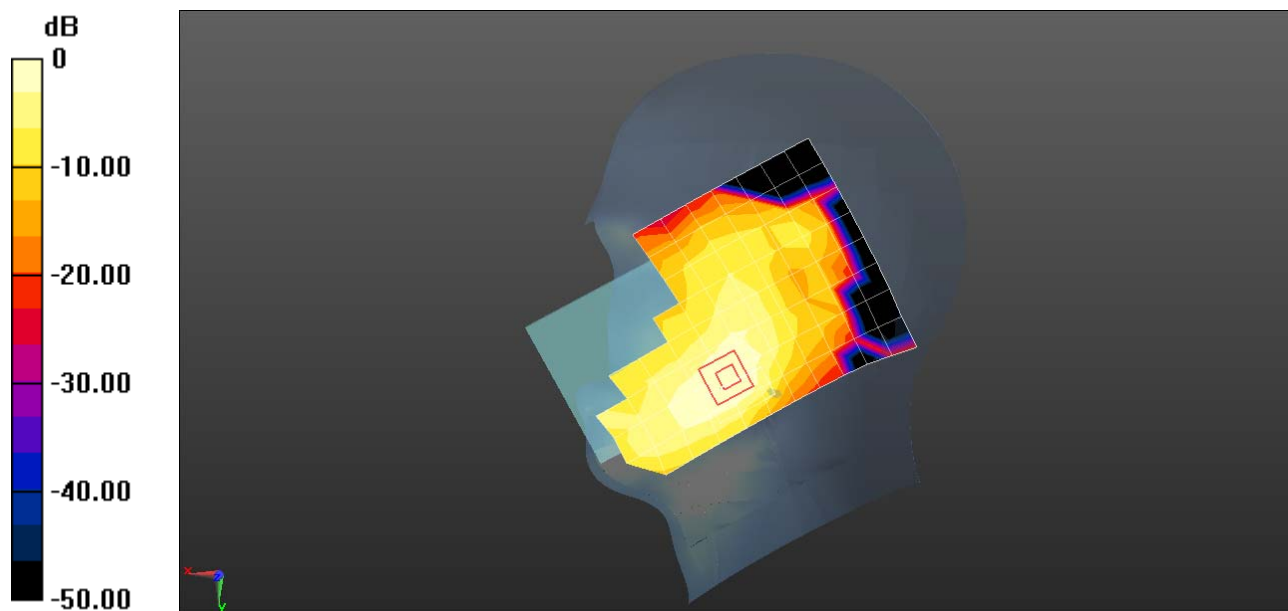

0 dB = 0.103 W/kg = -9.85 dBW/kg

Test Laboratory: HUAWEI SAR/HAC Lab

H1611 GSM1900 661CH Back Side 15mm**DUT: H1611; Type: Smart Phone; Serial: SAR2**

Communication System: UID 0, HW-GSM/GPRS/EGPRS-1TS (0); Frequency: 1880 MHz; Duty Cycle: 1:8.30042

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.515$ S/m; $\epsilon_r = 52.201$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- ζ Probe: EX3DV4 - SN3736; ConvF(7.15, 7.15, 7.15); Calibrated: 2016-4-26;
- ζ Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- ζ Electronics: DAE4 Sn1236; Calibrated: 2015-11-23
- ζ Phantom: SAM4; Type: SAM; Serial: TP-1620
- ζ DASY52 52.8.8(1222);

Configuration/Head/Area Scan (9x14x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 0.503 W/kg



Configuration/Head/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 4.601 V/m; Power Drift = 0.13 dB

Peak SAR (extrapolated) = 0.628 W/kg

SAR(1 g) = 0.383 W/kg; SAR(10 g) = 0.219 W/kg

Maximum value of SAR (measured) = 0.537 W/kg

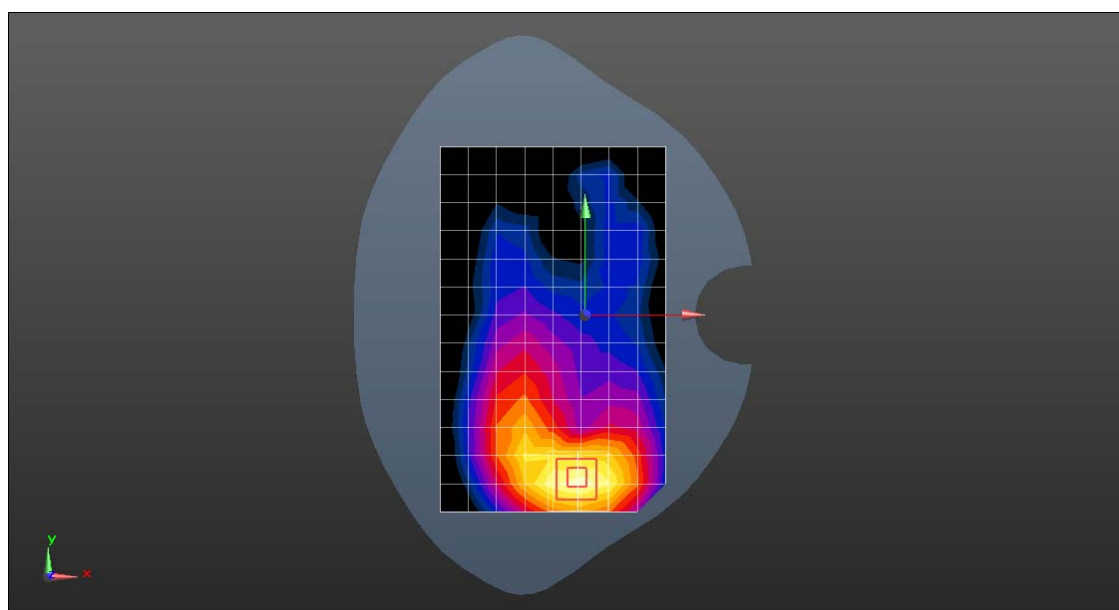

0 dB = 0.537 W/kg = -2.70 dBW/kg

Test Laboratory: HUAWEI SAR/HAC Lab

H1611 GSM1900 GPRS 2TS 661CH Bottom Side 10mm**DUT: H1611; Type: Smart Phone; Serial: SAR2**

Communication System: UID 0, HW-GSM/GPRS/EGPRS-2TS (0); Frequency: 1880 MHz; Duty Cycle: 1:4.10015

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.515$ S/m; $\epsilon_r = 52.201$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- ζ Probe: EX3DV4 - SN3736; ConvF(7.15, 7.15, 7.15); Calibrated: 2016-4-26;
- ζ Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- ζ Electronics: DAE4 Sn1236; Calibrated: 2015-11-23
- ζ Phantom: SAM4; Type: SAM; Serial: TP-1620
- ζ DASY52 52.8.8(1222);

Configuration/Body/Area Scan (5x9x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 0.648 W/kg



Configuration/Body/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 18.03 V/m; Power Drift = -0.18 dB

Peak SAR (extrapolated) = 0.962 W/kg

SAR(1 g) = 0.544 W/kg; SAR(10 g) = 0.291 W/kg

Maximum value of SAR (measured) = 0.815 W/kg

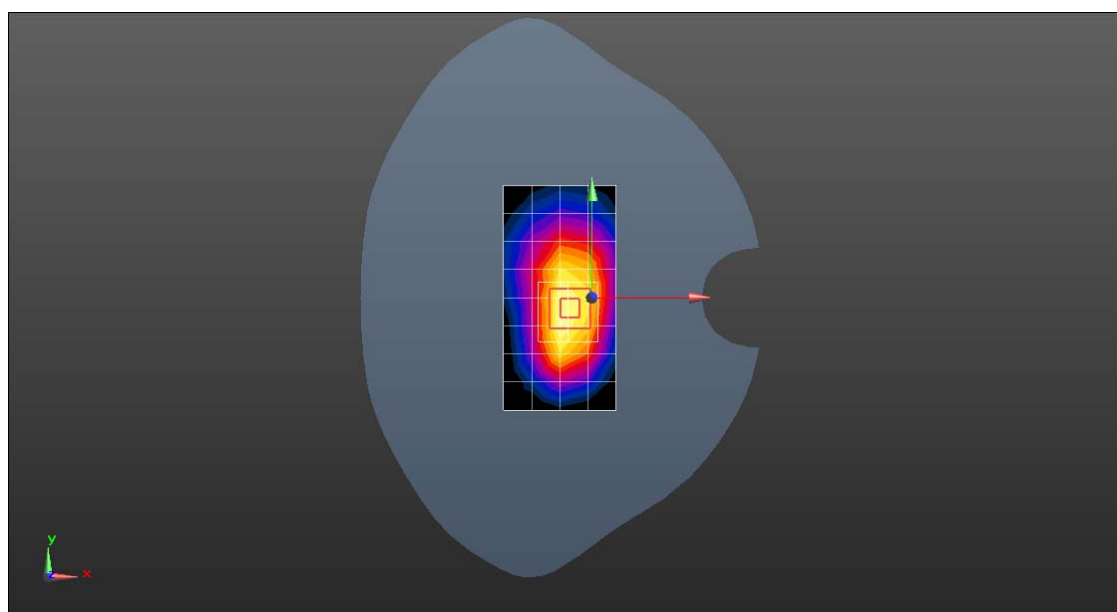

0 dB = 0.815 W/kg = -0.89 dBW/kg

Test Laboratory: HUAWEI SAR/HAC Lab

H1611 GSM1900 GPRS 2TS 810CH Back Side 0mm**DUT: H1611; Type: Smart Phone; Serial: SAR2**

Communication System: UID 0, HW-GSM/GPRS/EGPRS-2TS (0); Frequency: 1909.8 MHz; Duty Cycle: 1:4.10015

Medium parameters used: $f = 1910$ MHz; $\sigma = 1.535$ S/m; $\epsilon_r = 52.085$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- ζ Probe: EX3DV4 - SN3736; ConvF(7.15, 7.15, 7.15); Calibrated: 2016-4-26;
- ζ Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- ζ Electronics: DAE4 Sn1236; Calibrated: 2015-11-23
- ζ Phantom: SAM4; Type: SAM; Serial: TP-1620
- ζ DASY52 52.8.8(1222);

Configuration/Body/Area Scan (9x14x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 9.36 W/kg



Configuration/Body/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 1.976 V/m; Power Drift = 0.02 dB

Peak SAR (extrapolated) = 13.8 W/kg

SAR(1 g) = 5.6 W/kg; SAR(10 g) = 2.32 W/kg

Maximum value of SAR (measured) = 11.0 W/kg

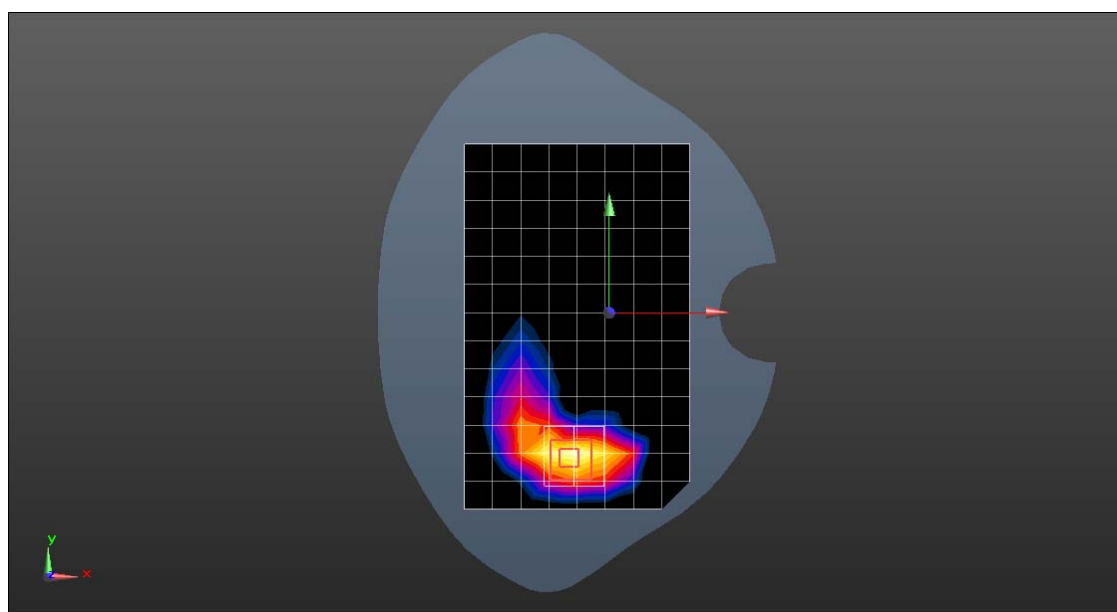

0 dB = 11.0 W/kg = 10.40 dBW/kg

Test Laboratory: HUAWEI SAR/HAC Lab

H1611 UMTS Band II 9262CH Right touch

DUT: H1611; Type: Smart Phone; Serial: SAR2

Communication System: UID 0, HW-UMTS-FDD(WCDMA) (0); Frequency: 1852.4 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 1852.4$ MHz; $\sigma = 1.382$ S/m; $\epsilon_r = 40.122$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY Configuration:

- ζ Probe: EX3DV4 - SN3736; ConvF(7.45, 7.45, 7.45); Calibrated: 2016-4-26;
- ζ Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- ζ Electronics: DAE4 Sn1236; Calibrated: 2015-11-23
- ζ Phantom: SAM3; Type: SAM; Serial: TP-1597
- ζ DASY52 52.8.8(1222);

Configuration/Head/Area Scan (9x15x1): Measurement grid: dx=15mm, dy=15mm

Info: Interpolated medium parameters used for SAR evaluation.

Maximum value of SAR (measured) = 0.197 W/kg

Configuration/Head/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm


Reference Value = 3.021 V/m; Power Drift = 0.16 dB

Peak SAR (extrapolated) = 0.243 W/kg

SAR(1 g) = 0.156 W/kg; SAR(10 g) = 0.097 W/kg

Info: Interpolated medium parameters used for SAR evaluation.

Maximum value of SAR (measured) = 0.211 W/kg

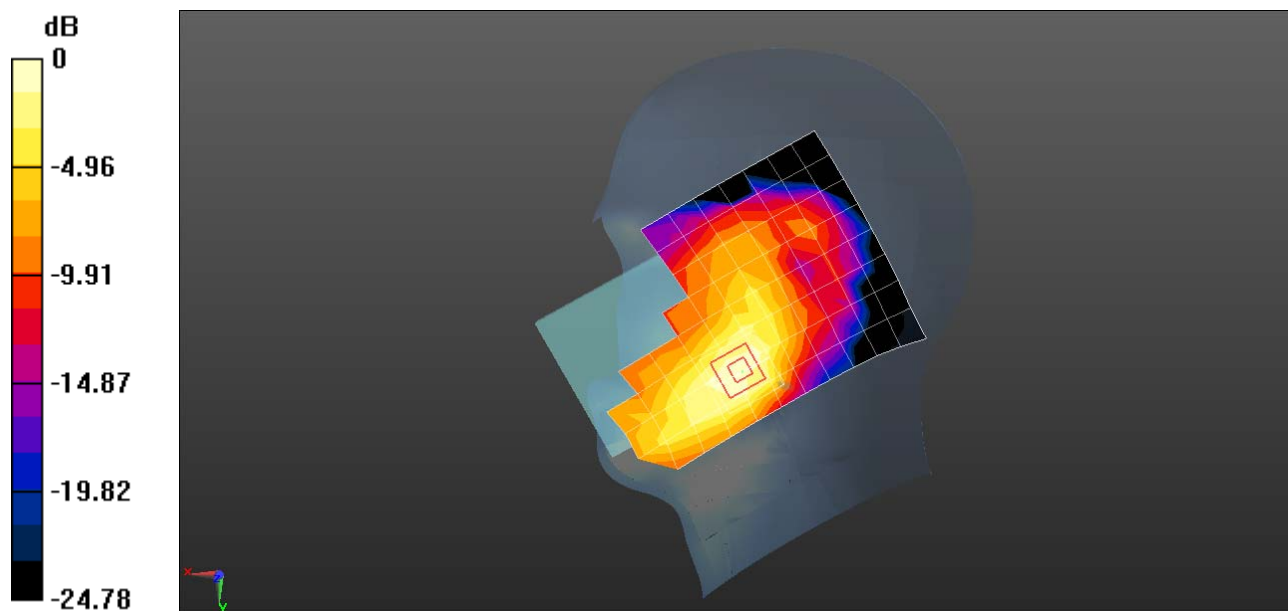

0 dB = 0.211 W/kg = -6.75 dBW/kg

Test Laboratory: HUAWEI SAR/HAC Lab

H1611 UMTS Band II 9400CH Back Side 15mm**DUT: H1611; Type: Smart Phone; Serial: SAR2**

Communication System: UID 0, HW-UMTS-FDD(WCDMA) (0); Frequency: 1880 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.515$ S/m; $\epsilon_r = 52.201$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- ζ Probe: EX3DV4 - SN3736; ConvF(7.15, 7.15, 7.15); Calibrated: 2016-4-26;
- ζ Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- ζ Electronics: DAE4 Sn1236; Calibrated: 2015-11-23
- ζ Phantom: SAM4; Type: SAM; Serial: TP-1620
- ζ DASY52 52.8.8(1222);

Configuration/Body/Area Scan (9x14x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 0.951 W/kg



Configuration/Body/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 6.213 V/m; Power Drift = 0.19 dB

Peak SAR (extrapolated) = 1.18 W/kg

SAR(1 g) = 0.706 W/kg; SAR(10 g) = 0.399 W/kg

Maximum value of SAR (measured) = 1.01 W/kg

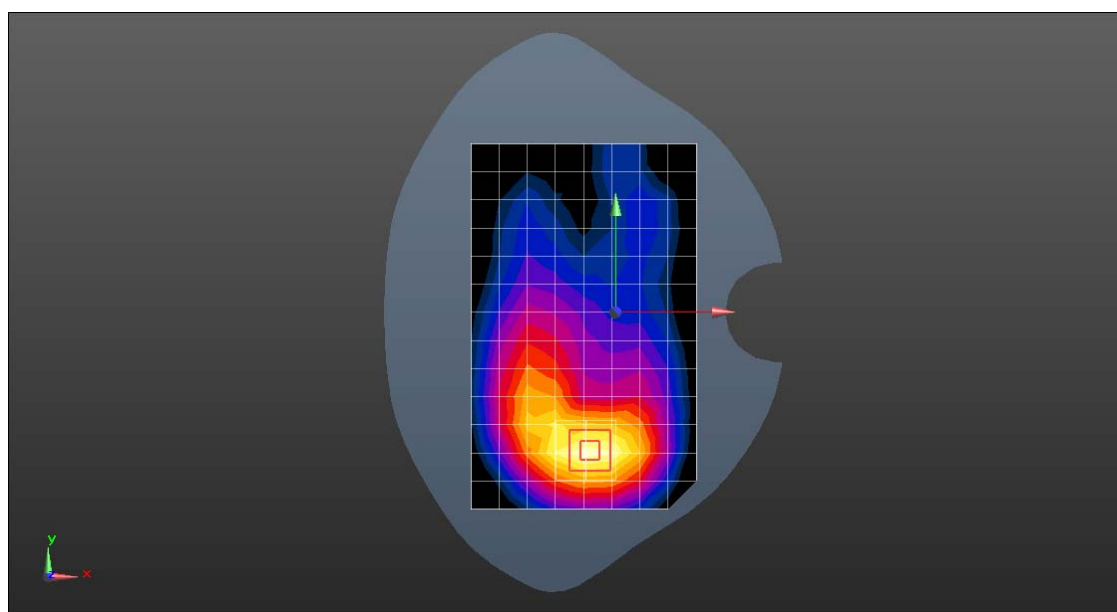

0 dB = 1.01 W/kg = 0.04 dBW/kg

Test Laboratory: HUAWEI SAR/HAC Lab

H1611 UMTS Band II 9400CH Bottom Side 10mm**DUT: H1611; Type: Smart Phone; Serial: SAR2**

Communication System: UID 0, HW-UMTS-FDD(WCDMA) (0); Frequency: 1880 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.515$ S/m; $\epsilon_r = 52.201$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- ζ Probe: EX3DV4 - SN3736; ConvF(7.15, 7.15, 7.15); Calibrated: 2016-4-26;
- ζ Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- ζ Electronics: DAE4 Sn1236; Calibrated: 2015-11-23
- ζ Phantom: SAM4; Type: SAM; Serial: TP-1620
- ζ DASY52 52.8.8(1222);

Configuration/Body/Area Scan (5x9x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 0.575 W/kg



Configuration/Body/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 17.13 V/m; Power Drift = -0.19 dB

Peak SAR (extrapolated) = 0.898 W/kg

SAR(1 g) = 0.508 W/kg; SAR(10 g) = 0.273 W/kg

Maximum value of SAR (measured) = 0.755 W/kg

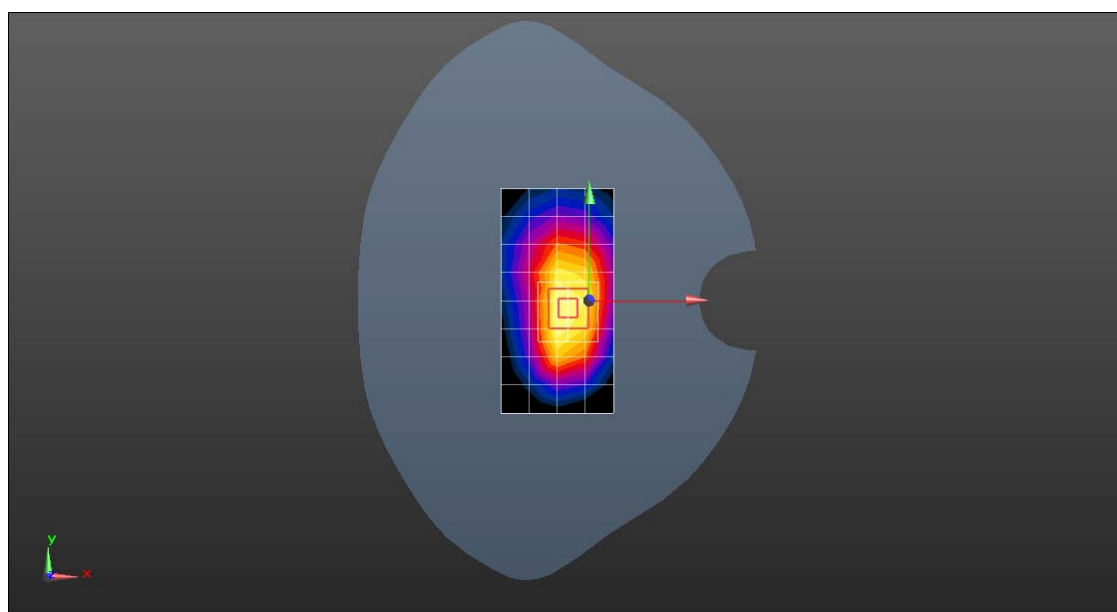

0 dB = 0.755 W/kg = -1.22 dBW/kg

Test Laboratory: HUAWEI SAR/HAC Lab

H1611 UMTS Band II 9538CH Bottom Side 0mm**DUT: H1611; Type: Smart Phone; Serial: SAR2**

Communication System: UID 0, HW-UMTS-FDD(WCDMA) (0); Frequency: 1907.6 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1908$ MHz; $\sigma = 1.536$ S/m; $\epsilon_r = 52.068$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- ζ Probe: EX3DV4 - SN3736; ConvF(7.15, 7.15, 7.15); Calibrated: 2016-4-26;
- ζ Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- ζ Electronics: DAE4 Sn1236; Calibrated: 2015-11-23
- ζ Phantom: SAM4; Type: SAM; Serial: TP-1620
- ζ DASY52 52.8.8(1222);

Configuration/Body/Area Scan (5x9x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 10.7 W/kg



Configuration/Body/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 66.43 V/m; Power Drift = -0.13 dB

Peak SAR (extrapolated) = 15.7 W/kg

SAR(1 g) = 6.74 W/kg; SAR(10 g) = 2.8 W/kg

Maximum value of SAR (measured) = 12.5 W/kg

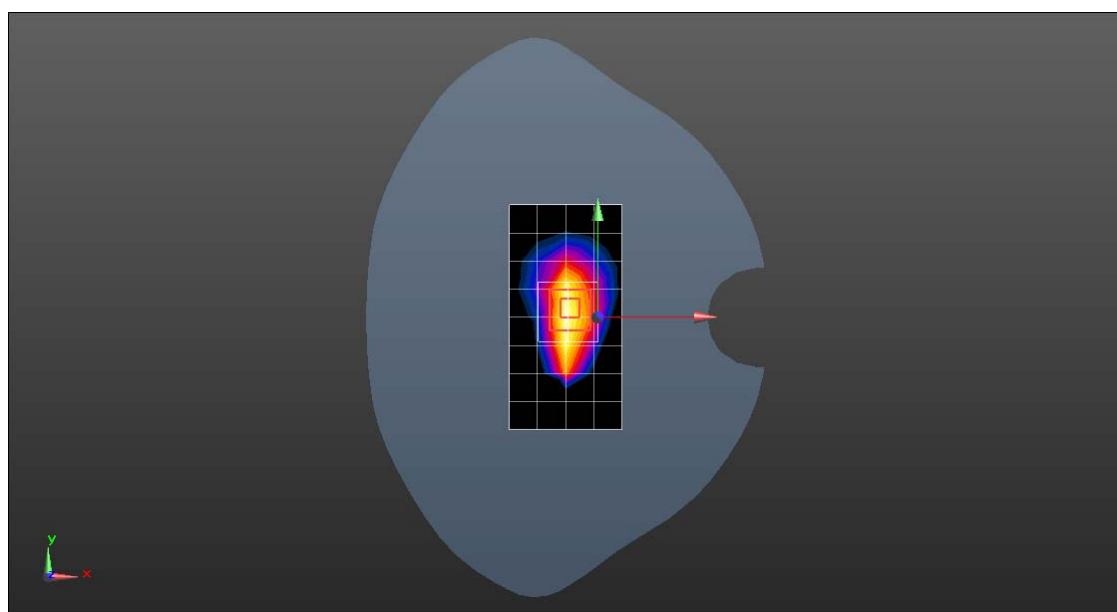

0 dB = 12.5 W/kg = 10.96 dBW/kg

Test Laboratory: HUAWEI SAR/HAC Lab

H1611 UMTS Band V 4182CH Right touch

DUT: H1611; Type: Smart Phone; Serial: SAR2

Communication System: UID 0, HW-UMTS-FDD(WCDMA) (0); Frequency: 836.4 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 836.4$ MHz; $\sigma = 0.936$ S/m; $\epsilon_r = 41.819$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY Configuration:

- ⌄ Probe: EX3DV4 - SN3744; ConvF(8.77, 8.77, 8.77); Calibrated: 2015-7-24;
- ⌄ Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- ⌄ Electronics: DAE4 Sn1236; Calibrated: 2015-11-23
- ⌄ Phantom: SAM4; Type: SAM; Serial: TP-1620
- ⌄ DASY52 52.8.8(1222);

Configuration/Head/Area Scan (9x15x1): Measurement grid: dx=15mm, dy=15mm

Info: Interpolated medium parameters used for SAR evaluation.

Maximum value of SAR (measured) = 0.353 W/kg

Configuration/Head/Zoom Scan (6x6x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm


Reference Value = 7.537 V/m; Power Drift = 0.07 dB

Peak SAR (extrapolated) = 0.417 W/kg

SAR(1 g) = 0.312 W/kg; SAR(10 g) = 0.238 W/kg

Info: Interpolated medium parameters used for SAR evaluation.

Maximum value of SAR (measured) = 0.380 W/kg

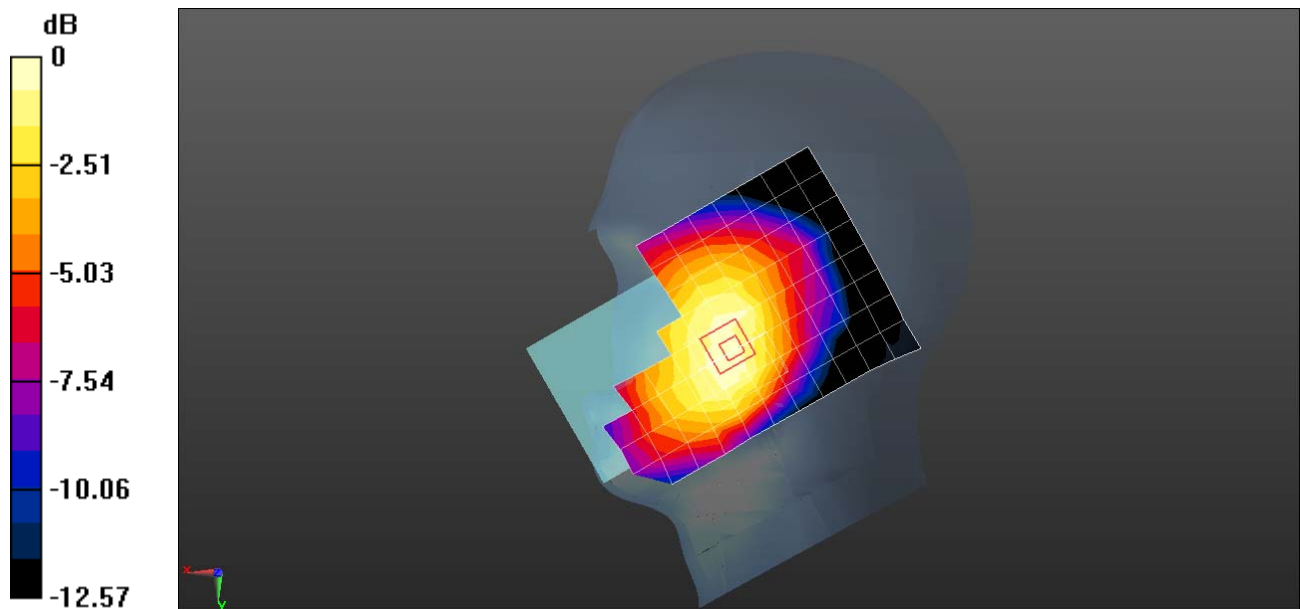

0 dB = 0.380 W/kg = -4.21 dBW/kg

Test Laboratory: HUAWEI SAR/HAC Lab

H1611 UMTS Band V 4182CH Back Side 15mm**DUT: H1611; Type: Smart Phone; Serial: SAR2**

Communication System: UID 0, HW-UMTS-FDD(WCDMA) (0); Frequency: 836.4 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 836.4$ MHz; $\sigma = 0.987$ S/m; $\epsilon_r = 53.511$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- ζ Probe: EX3DV4 - SN3736; ConvF(9.08, 9.08, 9.08); Calibrated: 2016-4-26;
- ζ Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- ζ Electronics: DAE4 Sn1236; Calibrated: 2015-11-23
- ζ Phantom: SAM4; Type: SAM; Serial: TP-1620
- ζ DASY52 52.8.8(1222);

Configuration/Body/Area Scan (9x14x1): Measurement grid: dx=15mm, dy=15mm

Info: Interpolated medium parameters used for SAR evaluation.

Maximum value of SAR (measured) = 0.356 W/kg

Configuration/Body/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm


Reference Value = 17.03 V/m; Power Drift = 0.00 dB

Peak SAR (extrapolated) = 0.433 W/kg

SAR(1 g) = 0.258 W/kg; SAR(10 g) = 0.158 W/kg

Info: Interpolated medium parameters used for SAR evaluation.

Maximum value of SAR (measured) = 0.366 W/kg

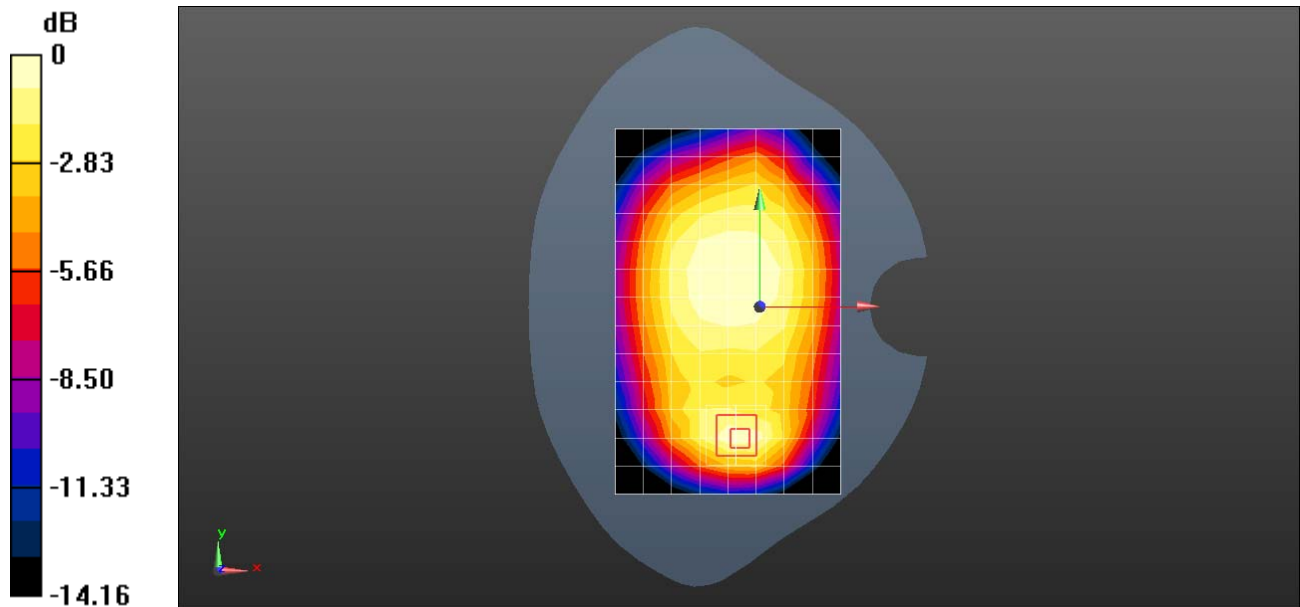

0 dB = 0.366 W/kg = -4.36 dBW/kg

Test Laboratory: HUAWEI SAR/HAC Lab

H1611 UMTS Band V 4182CH Back Side 10mm**DUT: H1611; Type: Smart Phone; Serial: SAR2**

Communication System: UID 0, HW-UMTS-FDD(WCDMA) (0); Frequency: 836.4 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 836.4$ MHz; $\sigma = 0.987$ S/m; $\epsilon_r = 53.511$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- ζ Probe: EX3DV4 - SN3736; ConvF(9.08, 9.08, 9.08); Calibrated: 2016-4-26;
- ζ Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- ζ Electronics: DAE4 Sn1236; Calibrated: 2015-11-23
- ζ Phantom: SAM4; Type: SAM; Serial: TP-1620
- ζ DASY52 52.8.8(1222);

Configuration/Body/Area Scan (9x14x1): Measurement grid: dx=15mm, dy=15mm

Info: Interpolated medium parameters used for SAR evaluation.

Maximum value of SAR (measured) = 0.654 W/kg

Configuration/Body/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm


Reference Value = 15.99 V/m; Power Drift = 0.07 dB

Peak SAR (extrapolated) = 0.826 W/kg

SAR(1 g) = 0.444 W/kg; SAR(10 g) = 0.254 W/kg

Info: Interpolated medium parameters used for SAR evaluation.

Maximum value of SAR (measured) = 0.678 W/kg

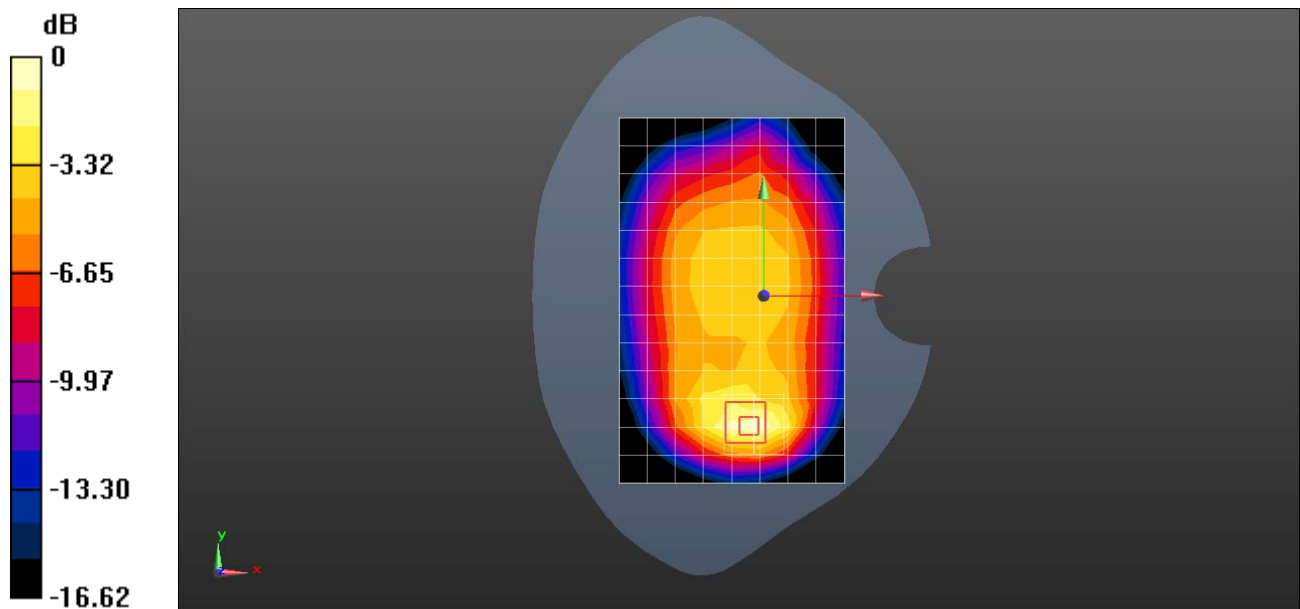

0 dB = 0.678 W/kg = -1.69 dBW/kg

Test Laboratory: HUAWEI SAR/HAC Lab

H1611 LTE Band II 20M QPSK 1RB 0 offset 18700CH Right touch**DUT: H1611; Type: Smart Phone; Serial: SAR2**

Communication System: UID 0, LTE-FDD (SC-FDMA, 20MHz, QPSK/16-QAM) (0); Frequency: 1860 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1860$ MHz; $\sigma = 1.39$ S/m; $\epsilon_r = 40.089$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY Configuration:

- ζ Probe: EX3DV4 - SN3736; ConvF(7.45, 7.45, 7.45); Calibrated: 2016-4-26;
- ζ Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- ζ Electronics: DAE4 Sn1236; Calibrated: 2015-11-23
- ζ Phantom: SAM3; Type: SAM; Serial: TP-1597
- ζ DASY52 52.8.8(1222);

Configuration/Head/Area Scan (9x15x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 0.168 W/kg



Configuration/Head/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 3.572 V/m; Power Drift = 0.13 dB

Peak SAR (extrapolated) = 0.239 W/kg

SAR(1 g) = 0.148 W/kg; SAR(10 g) = 0.092 W/kg

Maximum value of SAR (measured) = 0.207 W/kg

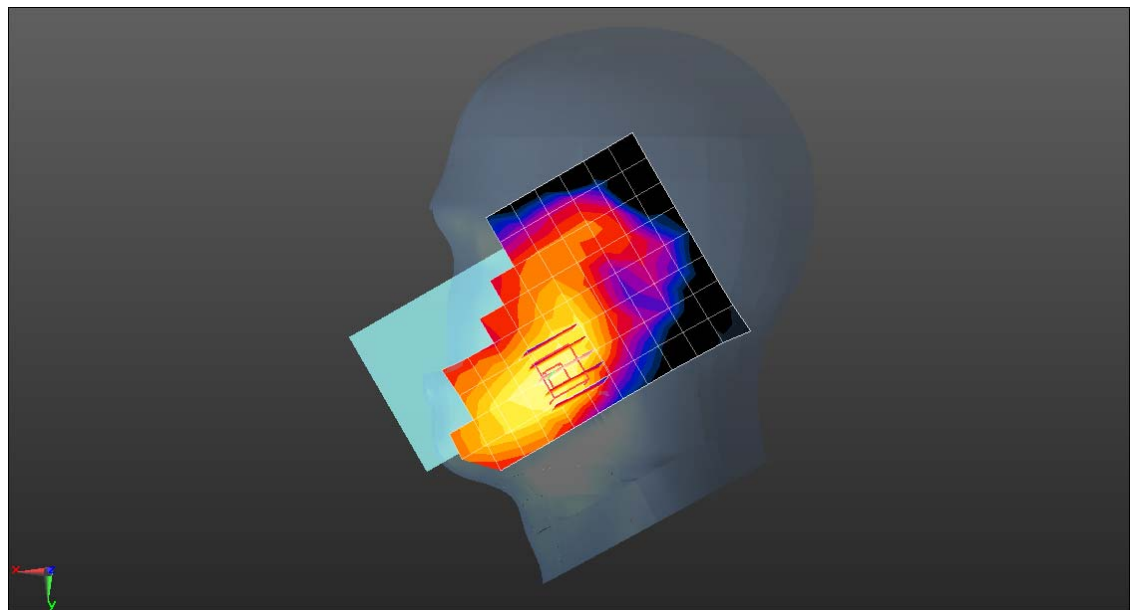

0 dB = 0.207 W/kg = -6.84 dBW/kg

Test Laboratory: HUAWEI SAR/HAC Lab

H1611 LTE Band II 20M QPSK 1RB 99 offset 19100CH Back Side 15mm**DUT: H1611; Type: Smart Phone; Serial: SAR2**

Communication System: UID 0, LTE-FDD (SC-FDMA, 20MHz, QPSK/16-QAM) (0); Frequency: 1900 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1900$ MHz; $\sigma = 1.53$ S/m; $\epsilon_r = 52.145$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- ζ Probe: EX3DV4 - SN3736; ConvF(7.15, 7.15, 7.15); Calibrated: 2016-4-26;
- ζ Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- ζ Electronics: DAE4 Sn1236; Calibrated: 2015-11-23
- ζ Phantom: SAM4; Type: SAM; Serial: TP-1620
- ζ DASY52 52.8.8(1222);

Configuration/Body/Area Scan (9x14x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 0.865 W/kg



Configuration/Body/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 7.131 V/m; Power Drift = -0.01 dB

Peak SAR (extrapolated) = 1.05 W/kg

SAR(1 g) = 0.611 W/kg; SAR(10 g) = 0.338 W/kg

Maximum value of SAR (measured) = 0.881 W/kg

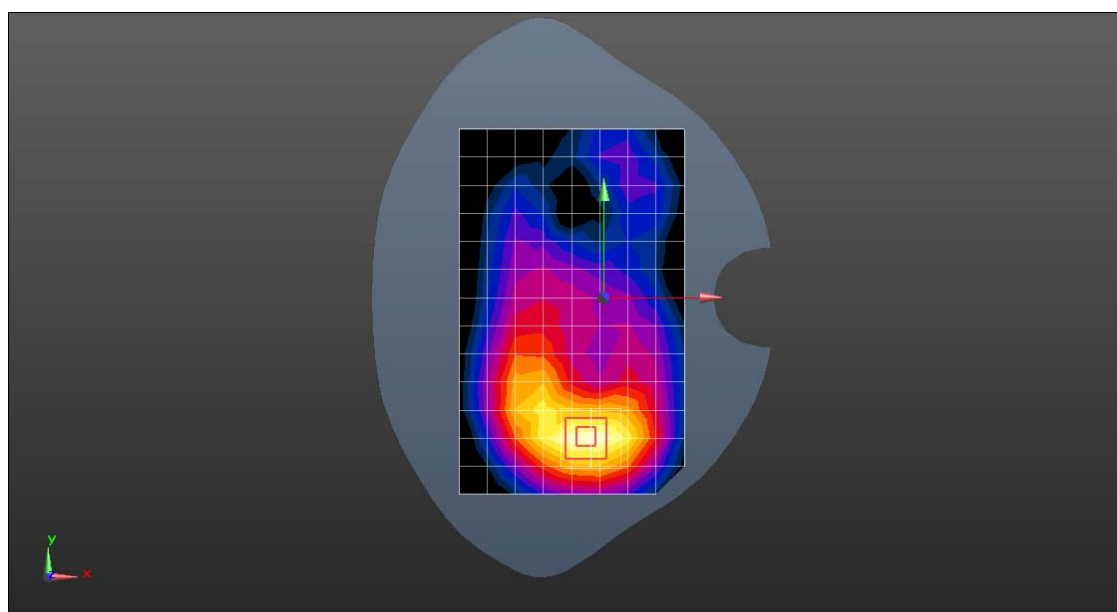

0 dB = 0.881 W/kg = -0.55 dBW/kg

Test Laboratory: HUAWEI SAR/HAC Lab

H1611 LTE Band II 20M QPSK 1RB 50 offset 18700CH Back Side 10mm**DUT: H1611; Type: Smart Phone; Serial: SAR2**

Communication System: UID 0, LTE-FDD (SC-FDMA, 20MHz, QPSK/16-QAM) (0); Frequency: 1860 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1860$ MHz; $\sigma = 1.499$ S/m; $\epsilon_r = 52.246$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- ζ Probe: EX3DV4 - SN3736; ConvF(7.15, 7.15, 7.15); Calibrated: 2016-4-26;
- ζ Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- ζ Electronics: DAE4 Sn1236; Calibrated: 2015-11-23
- ζ Phantom: SAM4; Type: SAM; Serial: TP-1620
- ζ DASY52 52.8.8(1222);

Configuration/Body/Area Scan (9x14x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 0.374 W/kg



Configuration/Body/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 4.433 V/m; Power Drift = 0.14 dB

Peak SAR (extrapolated) = 0.757 W/kg

SAR(1 g) = 0.421 W/kg; SAR(10 g) = 0.216 W/kg

Maximum value of SAR (measured) = 0.642 W/kg

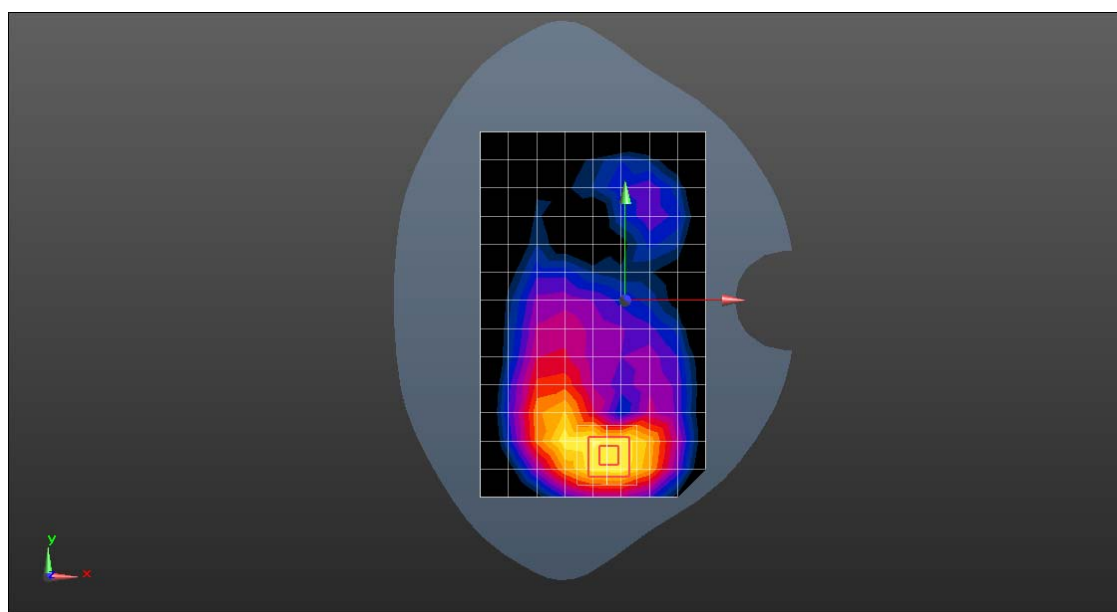

0 dB = 0.642 W/kg = -1.92 dBW/kg

Test Laboratory: HUAWEI SAR/HAC Lab

H1611 LTE Band II 20M QPSK 1RB 99 offset 18900CH Back Side 0mm**DUT: H1611; Type: Smart Phone; Serial: SAR2**

Communication System: UID 0, LTE-FDD (SC-FDMA, 20MHz, QPSK/16-QAM) (0); Frequency: 1880 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.515$ S/m; $\epsilon_r = 52.201$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- ζ Probe: EX3DV4 - SN3736; ConvF(7.15, 7.15, 7.15); Calibrated: 2016-4-26;
- ζ Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- ζ Electronics: DAE4 Sn1236; Calibrated: 2015-11-23
- ζ Phantom: SAM4; Type: SAM; Serial: TP-1620
- ζ DASY52 52.8.8(1222);

Configuration/Body/Area Scan (9x14x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 8.39 W/kg



Configuration/Body/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 2.145 V/m; Power Drift = 0.18 dB

Peak SAR (extrapolated) = 16.5 W/kg

SAR(1 g) = 6.52 W/kg; SAR(10 g) = 2.66 W/kg

Maximum value of SAR (measured) = 13.0 W/kg

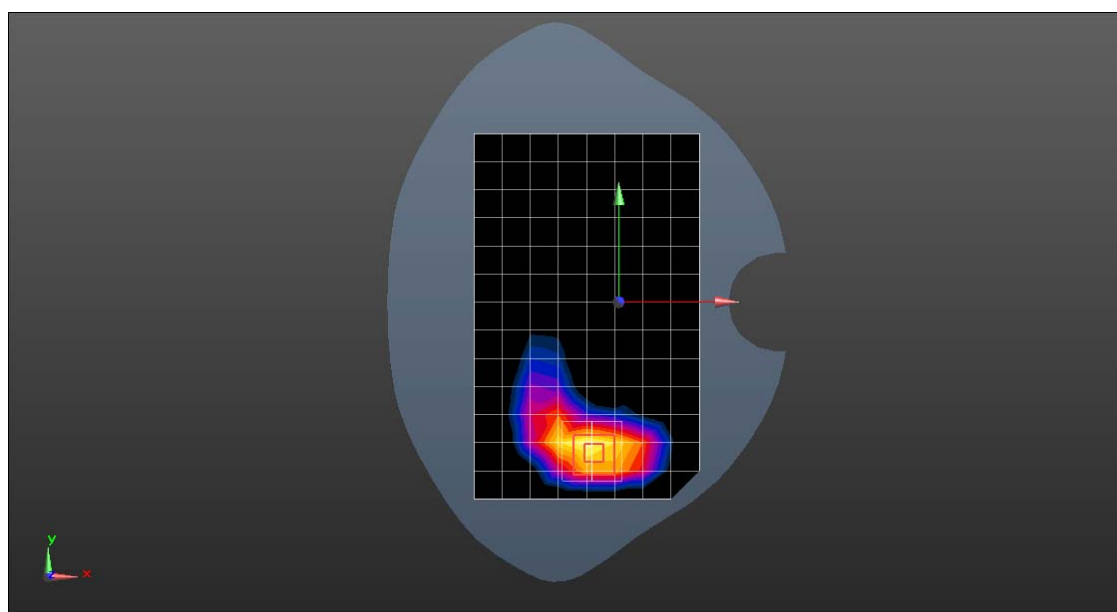

0 dB = 13.0 W/kg = 11.14 dBW/kg

Test Laboratory: HUAWEI SAR/HAC Lab

H1611 LTE Band IV 20M QPSK 1RB 0 offset 20300CH Right touch**DUT: H1611; Type: Smart Phone; Serial: SAR2**

Communication System: UID 0, LTE-FDD (SC-FDMA, 20MHz, QPSK/16-QAM) (0); Frequency: 1745 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1745$ MHz; $\sigma = 1.352$ S/m; $\epsilon_r = 39.765$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY Configuration:

- ζ Probe: EX3DV4 - SN3744; ConvF(7.84, 7.84, 7.84); Calibrated: 2015-7-24;
- ζ Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- ζ Electronics: DAE4 Sn1236; Calibrated: 2015-11-23
- ζ Phantom: SAM3; Type: SAM; Serial: TP-1597
- ζ DASY52 52.8.8(1222);

Configuration/Head/Area Scan (9x15x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 0.186 W/kg



Configuration/Head/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 3.417 V/m; Power Drift = 0.11 dB

Peak SAR (extrapolated) = 0.228 W/kg

SAR(1 g) = 0.156 W/kg; SAR(10 g) = 0.103 W/kg

Maximum value of SAR (measured) = 0.196 W/kg

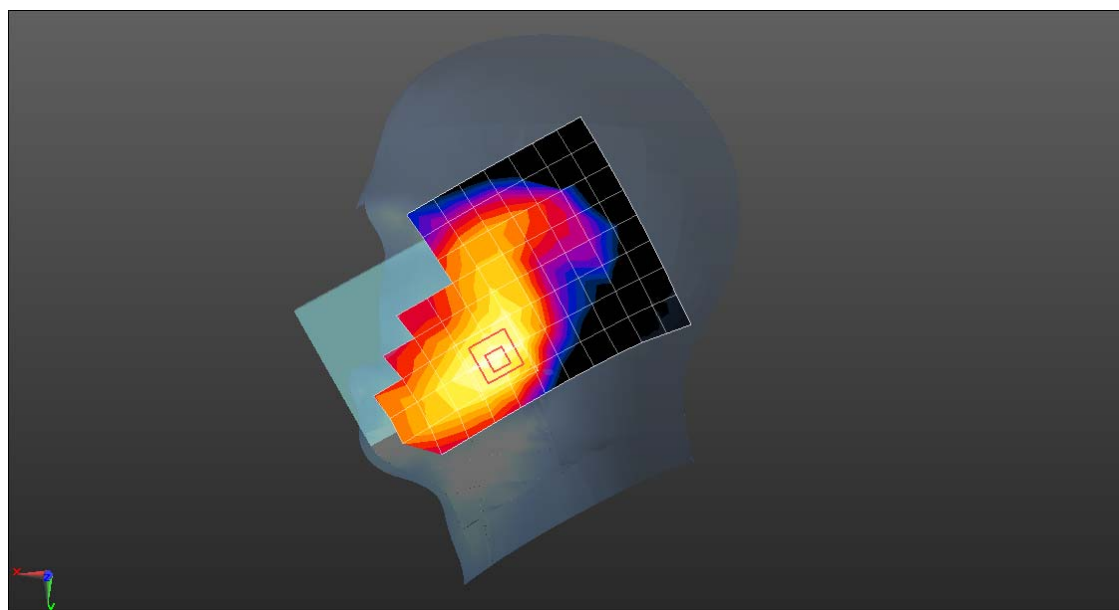

0 dB = 0.196 W/kg = -7.07 dBW/kg

Test Laboratory: HUAWEI SAR/HAC Lab

H1611 LTE Band IV 20M QPSK 1RB 0 offset 20050CH Back Side 15mm**DUT: H1611; Type: Smart Phone; Serial: SAR2**

Communication System: UID 0, LTE-FDD (SC-FDMA, 20MHz, QPSK/16-QAM) (0); Frequency: 1720 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1720$ MHz; $\sigma = 1.453$ S/m; $\epsilon_r = 51.941$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- ζ Probe: EX3DV4 - SN3744; ConvF(7.45, 7.45, 7.45); Calibrated: 2015-7-24;
- ζ Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- ζ Electronics: DAE4 Sn1236; Calibrated: 2015-11-23
- ζ Phantom: SAM4; Type: SAM; Serial: TP-1620
- ζ DASY52 52.8.8(1222);

Configuration/Body/Area Scan (9x15x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 0.534 W/kg



Configuration/Body/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 6.531 V/m; Power Drift = 0.12 dB

Peak SAR (extrapolated) = 0.682 W/kg

SAR(1 g) = 0.408 W/kg; SAR(10 g) = 0.235 W/kg

Maximum value of SAR (measured) = 0.581 W/kg

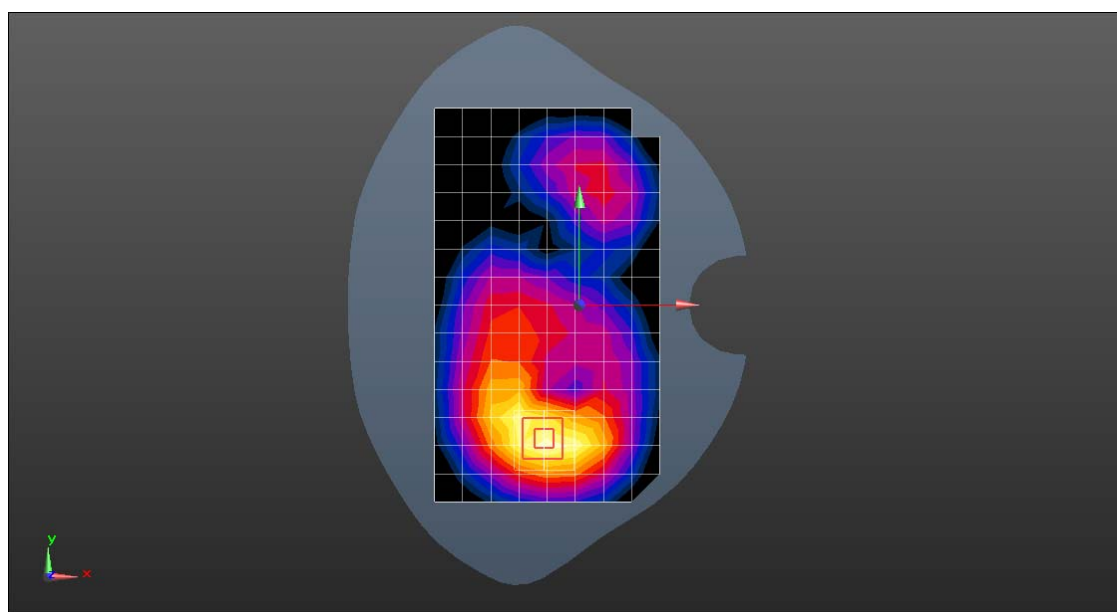

0 dB = 0.581 W/kg = -2.36 dBW/kg

Test Laboratory: HUAWEI SAR/HAC Lab

H1611 LTE Band IV 20M QPSK 1RB 50 offset 20300CH Back Side 10mm**DUT: H1611; Type: Smart Phone; Serial: SAR2**

Communication System: UID 0, LTE-FDD (SC-FDMA, 20MHz, QPSK/16-QAM) (0); Frequency: 1745 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1745$ MHz; $\sigma = 1.477$ S/m; $\epsilon_r = 51.924$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- ζ Probe: EX3DV4 - SN3744; ConvF(7.45, 7.45, 7.45); Calibrated: 2015-7-24;
- ζ Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- ζ Electronics: DAE4 Sn1236; Calibrated: 2015-11-23
- ζ Phantom: SAM4; Type: SAM; Serial: TP-1620
- ζ DASY52 52.8.8(1222);

Configuration/Body/Area Scan (9x15x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 0.794 W/kg



Configuration/Body/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 5.630 V/m; Power Drift = 0.12 dB

Peak SAR (extrapolated) = 0.934 W/kg

SAR(1 g) = 0.514 W/kg; SAR(10 g) = 0.272 W/kg

Maximum value of SAR (measured) = 0.779 W/kg

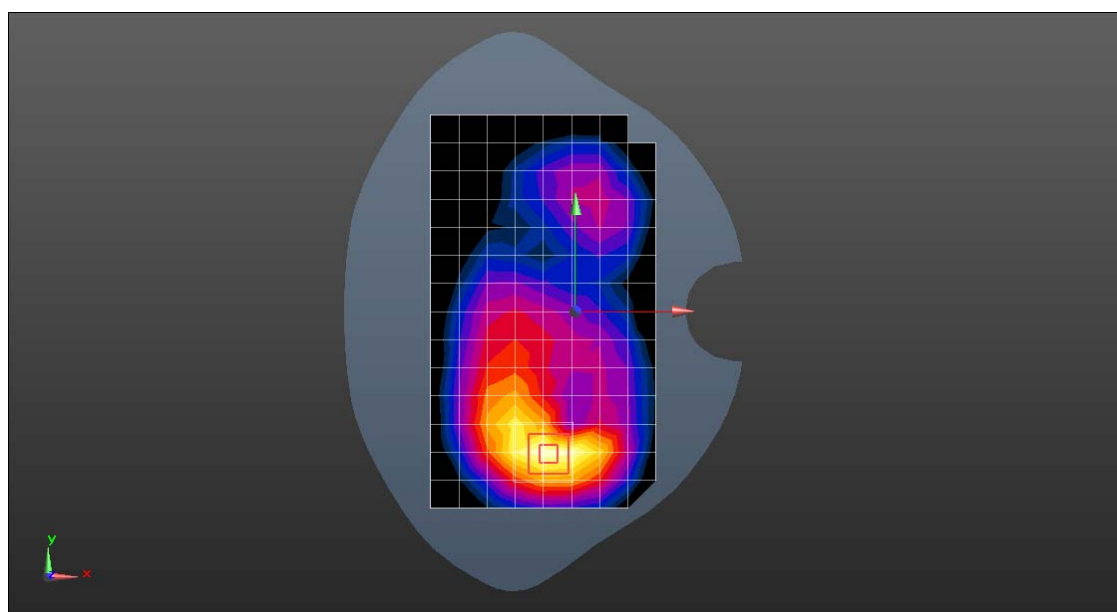

0 dB = 0.779 W/kg = -1.08 dBW/kg

Test Laboratory: HUAWEI SAR/HAC Lab

H1611 LTE Band V 10M QPSK 1RB 0 offset 20600CH Left touch**DUT: H1611; Type: Smart Phone; Serial: SAR2**

Communication System: UID 0, LTE-FDD (SC-FDMA, 10MHz, QPSK/16-QAM) (0); Frequency: 844 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 844$ MHz; $\sigma = 0.941$ S/m; $\epsilon_r = 41.732$; $\rho = 1000$ kg/m³

Phantom section: Left Section

DASY Configuration:

- ζ Probe: EX3DV4 - SN3744; ConvF(8.77, 8.77, 8.77); Calibrated: 2015-7-24;
- ζ Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- ζ Electronics: DAE4 Sn1236; Calibrated: 2015-11-23
- ζ Phantom: SAM4; Type: SAM; Serial: TP-1620
- ζ DASY52 52.8.8(1222);

Configuration/Head/Area Scan (9x15x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 0.327 W/kg



Configuration/Head/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 6.656 V/m; Power Drift = 0.17 dB

Peak SAR (extrapolated) = 0.355 W/kg

SAR(1 g) = 0.267 W/kg; SAR(10 g) = 0.206 W/kg

Maximum value of SAR (measured) = 0.320 W/kg

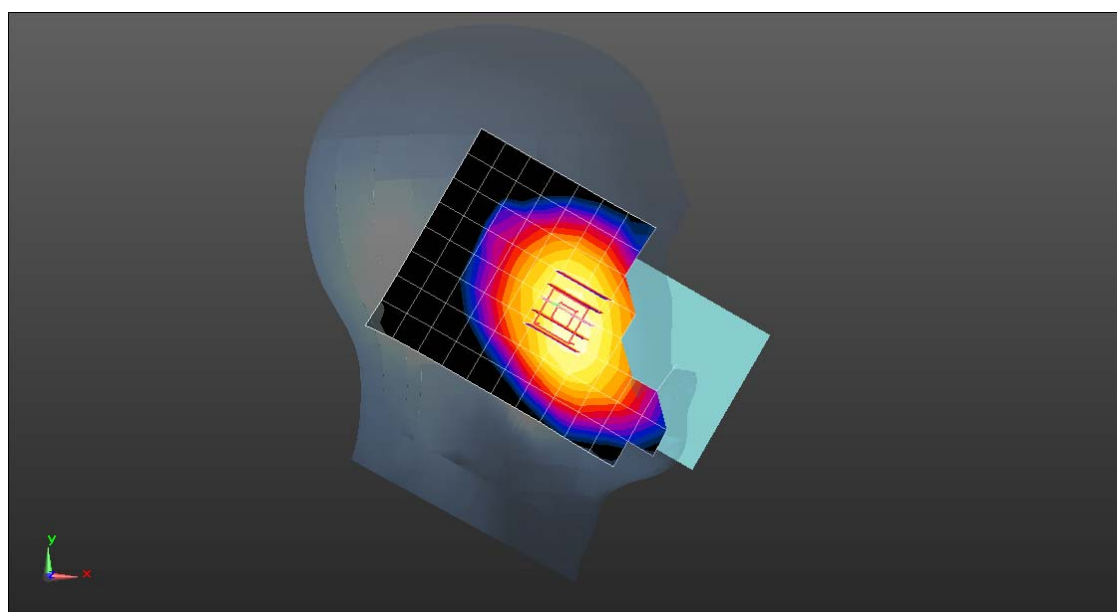

0 dB = 0.320 W/kg = -4.94 dBW/kg

Test Laboratory: HUAWEI SAR/HAC Lab

H1611 LTE Band V 10M QPSK 25RB 0 offset 20600CH Front Side 15mm**DUT: H1611; Type: Smart Phone; Serial: SAR2**

Communication System: UID 0, LTE-FDD (SC-FDMA, 10MHz, QPSK/16-QAM) (0); Frequency: 844 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 844$ MHz; $\sigma = 0.994$ S/m; $\epsilon_r = 53.417$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- ζ Probe: EX3DV4 - SN3736; ConvF(9.08, 9.08, 9.08); Calibrated: 2016-4-26;
- ζ Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- ζ Electronics: DAE4 Sn1236; Calibrated: 2015-11-23
- ζ Phantom: SAM4; Type: SAM; Serial: TP-1620
- ζ DASY52 52.8.8(1222);

Configuration/Body/Area Scan (9x14x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 0.304 W/kg



Configuration/Body/Zoom Scan (6x6x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 15.82 V/m; Power Drift = -0.09 dB

Peak SAR (extrapolated) = 0.343 W/kg

SAR(1 g) = 0.260 W/kg; SAR(10 g) = 0.198 W/kg

Maximum value of SAR (measured) = 0.316 W/kg

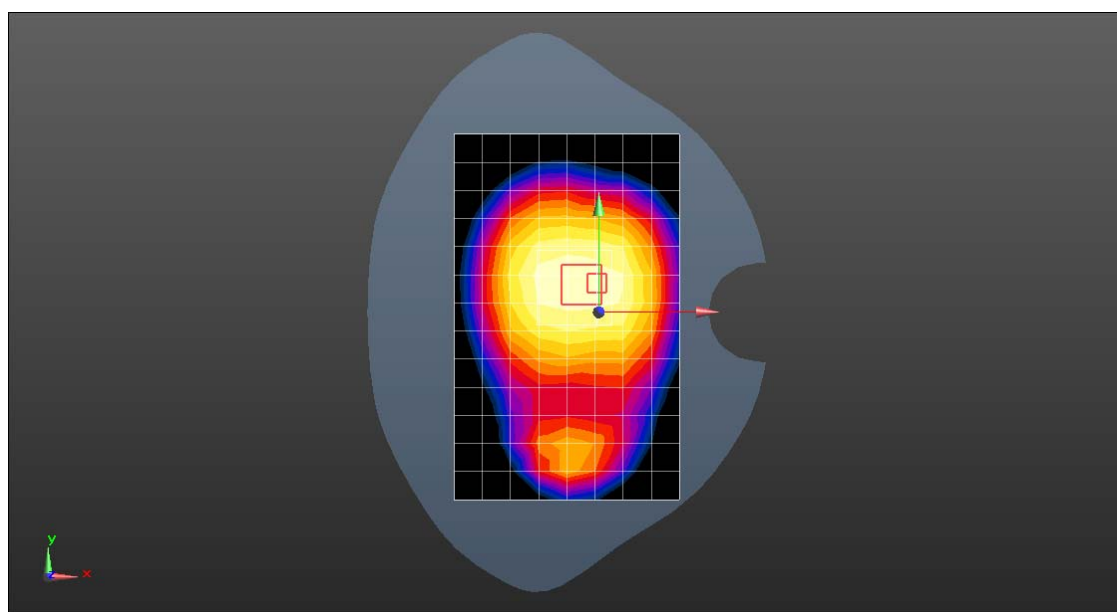

0 dB = 0.316 W/kg = -5.00 dBW/kg

Test Laboratory: HUAWEI SAR/HAC Lab

H1611 LTE Band V 10M QPSK 1RB 25 offset 20525CH Back Side 10mm**DUT: H1611; Type: Smart Phone; Serial: SAR2**

Communication System: UID 0, LTE-FDD (SC-FDMA, 10MHz, QPSK/16-QAM) (0); Frequency: 836.5 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 836.5$ MHz; $\sigma = 0.987$ S/m; $\epsilon_r = 53.509$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- ζ Probe: EX3DV4 - SN3736; ConvF(9.08, 9.08, 9.08); Calibrated: 2016-4-26;
- ζ Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- ζ Electronics: DAE4 Sn1236; Calibrated: 2015-11-23
- ζ Phantom: SAM4; Type: SAM; Serial: TP-1620
- ζ DASY52 52.8.8(1222);

Configuration/Body/Area Scan (9x14x1): Measurement grid: dx=15mm, dy=15mm

Info: Interpolated medium parameters used for SAR evaluation.

Maximum value of SAR (measured) = 0.390 W/kg

Configuration/Body/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm


Reference Value = 15.80 V/m; Power Drift = -0.00 dB

Peak SAR (extrapolated) = 0.592 W/kg

SAR(1 g) = 0.321 W/kg; SAR(10 g) = 0.186 W/kg

Info: Interpolated medium parameters used for SAR evaluation.

Maximum value of SAR (measured) = 0.487 W/kg

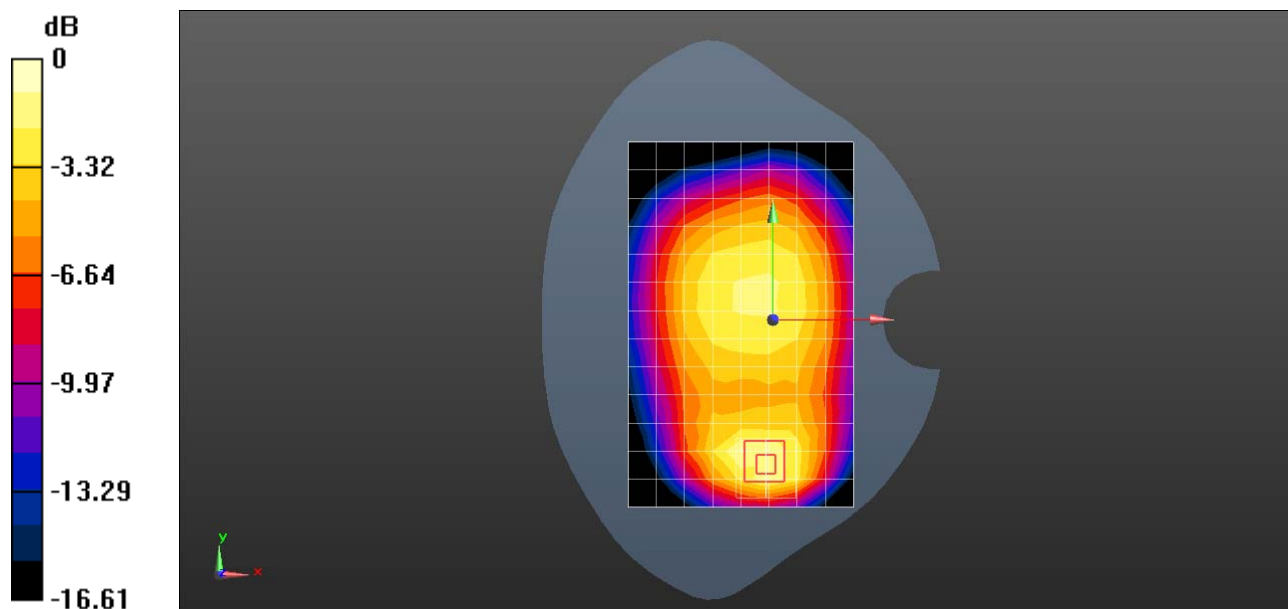

0 dB = 0.487 W/kg = -3.13 dBW/kg

Test Laboratory: HUAWEI SAR/HAC Lab

H1611 LTE Band XII 10M QPSK 1RB 25 offset 23060CH Left touch**DUT: H1611; Type: Smart Phone; Serial: SAR2**

Communication System: UID 0, LTE-FDD (SC-FDMA, 10MHz, QPSK/16-QAM) (0); Frequency: 704 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 704$ MHz; $\sigma = 0.847$ S/m; $\epsilon_r = 43.716$; $\rho = 1000$ kg/m³

Phantom section: Left Section

DASY Configuration:

- ζ Probe: EX3DV4 - SN3744; ConvF(9.44, 9.44, 9.44); Calibrated: 2015-7-24;
- ζ Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- ζ Electronics: DAE4 Sn1236; Calibrated: 2015-11-23
- ζ Phantom: SAM3; Type: SAM; Serial: TP-1597
- ζ DASY52 52.8.8(1222);

Configuration/Head/Area Scan (9x15x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 0.275 W/kg



Configuration/Head/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 6.822 V/m; Power Drift = 0.02 dB

Peak SAR (extrapolated) = 0.304 W/kg

SAR(1 g) = 0.230 W/kg; SAR(10 g) = 0.181 W/kg

Maximum value of SAR (measured) = 0.278 W/kg

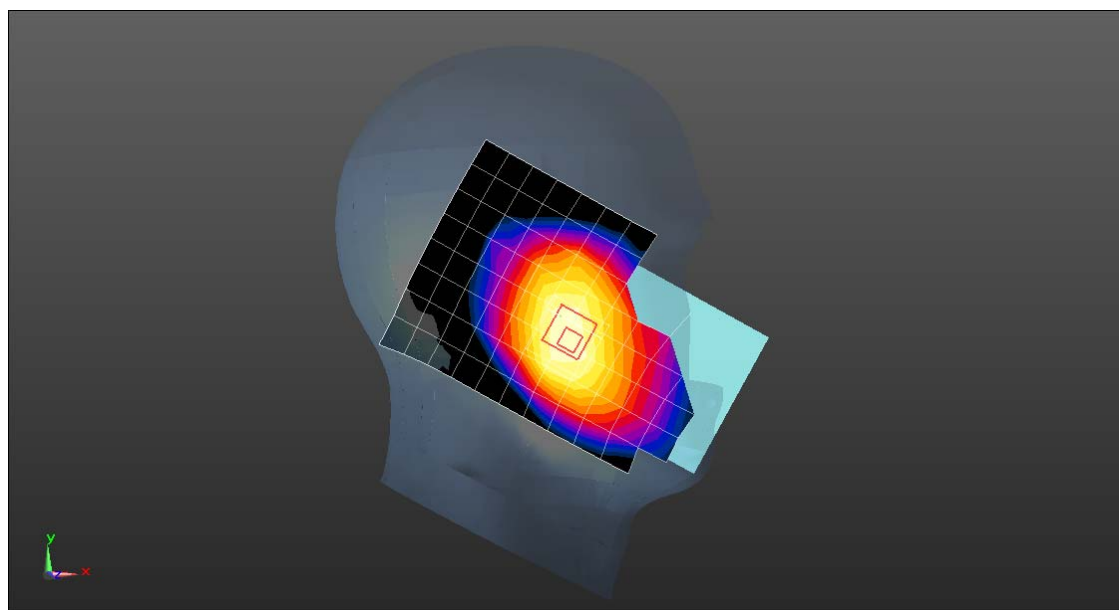

0 dB = 0.278 W/kg = -5.56 dBW/kg

Test Laboratory: HUAWEI SAR/HAC Lab

H1611 LTE Band XII 10M QPSK 1RB 25 offset 23130CH Back 15mm**DUT: H1611; Type: Smart Phone; Serial: SAR2**

Communication System: UID 0, LTE-FDD (SC-FDMA, 10MHz, QPSK/16-QAM) (0); Frequency: 704 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 704$ MHz; $\sigma = 0.921$ S/m; $\epsilon_r = 53.987$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- ζ Probe: EX3DV4 - SN3744; ConvF(9.01, 9.01, 9.01); Calibrated: 2015-7-24;
- ζ Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- ζ Electronics: DAE4 Sn1236; Calibrated: 2015-11-23
- ζ Phantom: SAM4; Type: SAM; Serial: TP-1620
- ζ DASY52 52.8.8(1222);

Configuration/Body/Area Scan (9x14x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 0.376 W/kg



Configuration/Body/Zoom Scan (6x6x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 15.71 V/m; Power Drift = 0.16 dB

Peak SAR (extrapolated) = 0.418 W/kg

SAR(1 g) = 0.302 W/kg; SAR(10 g) = 0.230 W/kg

Maximum value of SAR (measured) = 0.380 W/kg

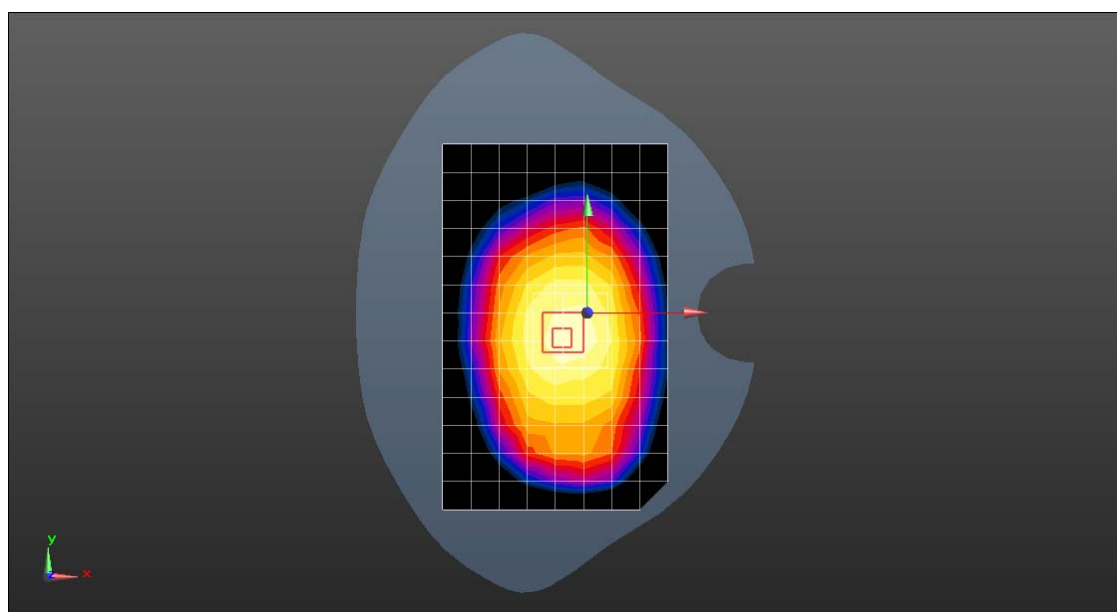

0 dB = 0.380 W/kg = -4.20 dBW/kg

Test Laboratory: HUAWEI SAR/HAC Lab

H1611 LTE Band XII 10M QPSK 1RB 25 offset 23060CH Right Side 10mm**DUT: H1611; Type: Smart Phone; Serial: SAR2**

Communication System: UID 0, LTE-FDD (SC-FDMA, 10MHz, QPSK/16-QAM) (0); Frequency: 704 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 704$ MHz; $\sigma = 0.921$ S/m; $\epsilon_r = 53.987$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- ζ Probe: EX3DV4 - SN3744; ConvF(9.01, 9.01, 9.01); Calibrated: 2015-7-24;
- ζ Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- ζ Electronics: DAE4 Sn1236; Calibrated: 2015-11-23
- ζ Phantom: SAM4; Type: SAM; Serial: TP-1620
- ζ DASY52 52.8.8(1222);

Configuration/Body/Area Scan (5x14x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 0.540 W/kg



Configuration/Body/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 21.22 V/m; Power Drift = -0.05 dB

Peak SAR (extrapolated) = 0.631 W/kg

SAR(1 g) = 0.405 W/kg; SAR(10 g) = 0.273 W/kg

Maximum value of SAR (measured) = 0.549 W/kg

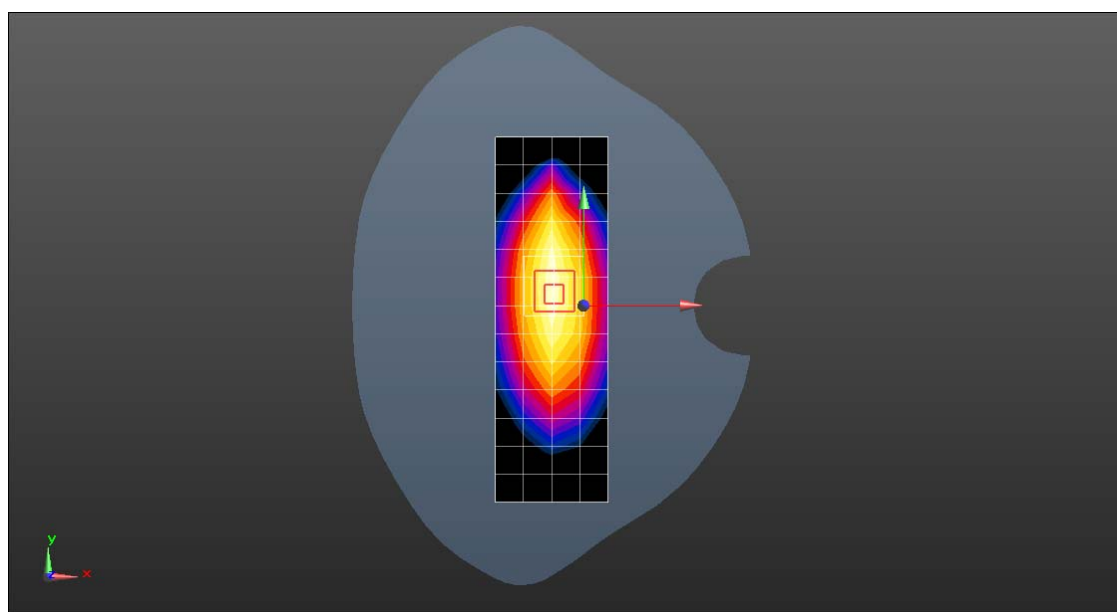

0 dB = 0.549 W/kg = -2.60 dBW/kg

Test Laboratory: HUAWEI SAR/HAC Lab

H1611 LTE Band XXX 10M QPSK 1RB 49 offset 27710CH Right touch

DUT: H1611; Type: Smart Phone; Serial: SAR2

Communication System: UID 0, LTE-FDD (SC-FDMA, 10MHz, QPSK/16-QAM) (0); Frequency: 2310 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 2310$ MHz; $\sigma = 1.708$ S/m; $\epsilon_r = 38.255$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY Configuration:

- ζ Probe: EX3DV4 - SN3736; ConvF(7.17, 7.17, 7.17); Calibrated: 2016-4-26;
- ζ Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- ζ Electronics: DAE4 Sn1236; Calibrated: 2015-11-23
- ζ Phantom: SAM4; Type: SAM; Serial: TP-1620
- ζ DASY52 52.8.8(1222);

Configuration/Head/Area Scan (10x17x1): Measurement grid: $dx=12$ mm, $dy=12$ mm

Maximum value of SAR (measured) = 0.101 W/kg



Configuration/Head/Zoom Scan (8x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 1.022 V/m; Power Drift = 0.13 dB

Peak SAR (extrapolated) = 0.143 W/kg

SAR(1 g) = 0.080 W/kg; SAR(10 g) = 0.044 W/kg

Maximum value of SAR (measured) = 0.119 W/kg

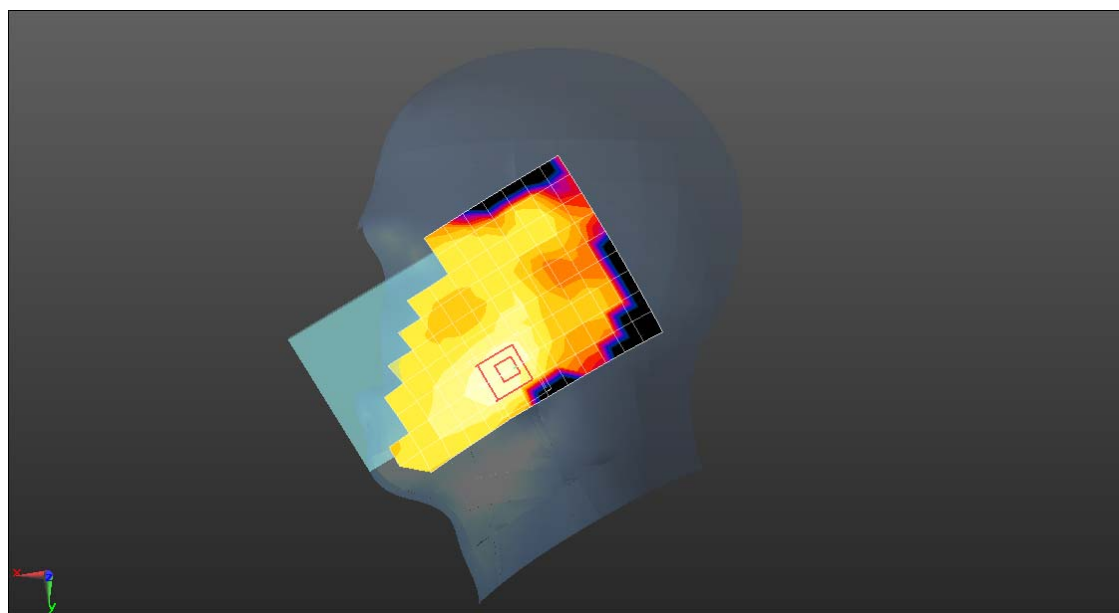

0 dB = 0.119 W/kg = -9.24 dBW/kg

Test Laboratory: HUAWEI SAR/HAC Lab

H1611 LTE Band XXX 10M QPSK 1RB 49 offset 27710CH Back Side 15mm**DUT: H1611; Type: Smart Phone; Serial: SAR2**

Communication System: UID 0, LTE-FDD (SC-FDMA, 10MHz, QPSK/16-QAM) (0); Frequency: 2310 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 2310$ MHz; $\sigma = 1.858$ S/m; $\epsilon_r = 54.969$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- ⌘ Probe: EX3DV4 - SN3736; ConvF(7.22, 7.22, 7.22); Calibrated: 2016-4-26;
- ⌘ Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- ⌘ Electronics: DAE4 Sn1236; Calibrated: 2015-11-23
- ⌘ Phantom: SAM3; Type: SAM; Serial: TP-1597
- ⌘ DASY52 52.8.8(1222);

Configuration/Body/Area Scan (10x17x1): Measurement grid: $dx=12$ mm, $dy=12$ mm

Maximum value of SAR (measured) = 0.398 W/kg



Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 2.709 V/m; Power Drift = 0.14 dB

Peak SAR (extrapolated) = 0.494 W/kg

SAR(1 g) = 0.282 W/kg; SAR(10 g) = 0.161 W/kg

Maximum value of SAR (measured) = 0.417 W/kg

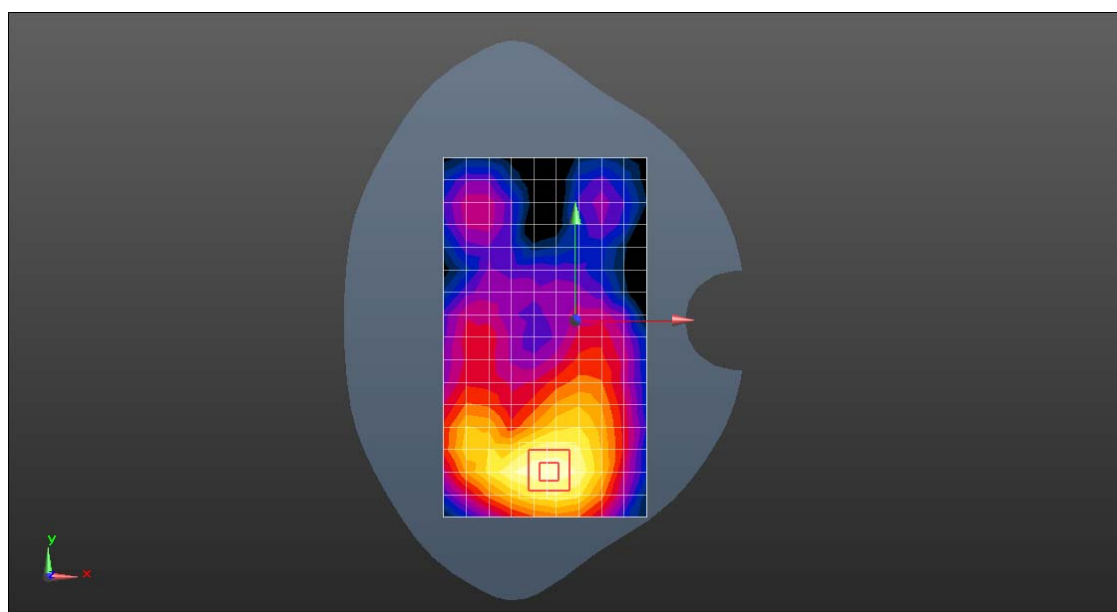

0 dB = 0.417 W/kg = -3.80 dBW/kg

Test Laboratory: HUAWEI SAR/HAC Lab

H1611 LTE Band XXX 10M QPSK 1RB 49 offset 27710CH Bottom Side 10mm**DUT: H1611; Type: Smart Phone; Serial: SAR2**

Communication System: UID 0, LTE-FDD (SC-FDMA, 10MHz, QPSK/16-QAM) (0); Frequency: 2310 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 2310$ MHz; $\sigma = 1.858$ S/m; $\epsilon_r = 54.969$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- ζ Probe: EX3DV4 - SN3736; ConvF(7.22, 7.22, 7.22); Calibrated: 2016-4-26;
- ζ Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- ζ Electronics: DAE4 Sn1236; Calibrated: 2015-11-23
- ζ Phantom: SAM3; Type: SAM; Serial: TP-1597
- ζ DASY52 52.8.8(1222);

Configuration/Body/Area Scan (6x11x1): Measurement grid: $dx=12$ mm, $dy=12$ mm

Maximum value of SAR (measured) = 0.989 W/kg



Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 19.36 V/m; Power Drift = 0.06 dB

Peak SAR (extrapolated) = 1.34 W/kg

SAR(1 g) = 0.727 W/kg; SAR(10 g) = 0.378 W/kg

Maximum value of SAR (measured) = 1.11 W/kg

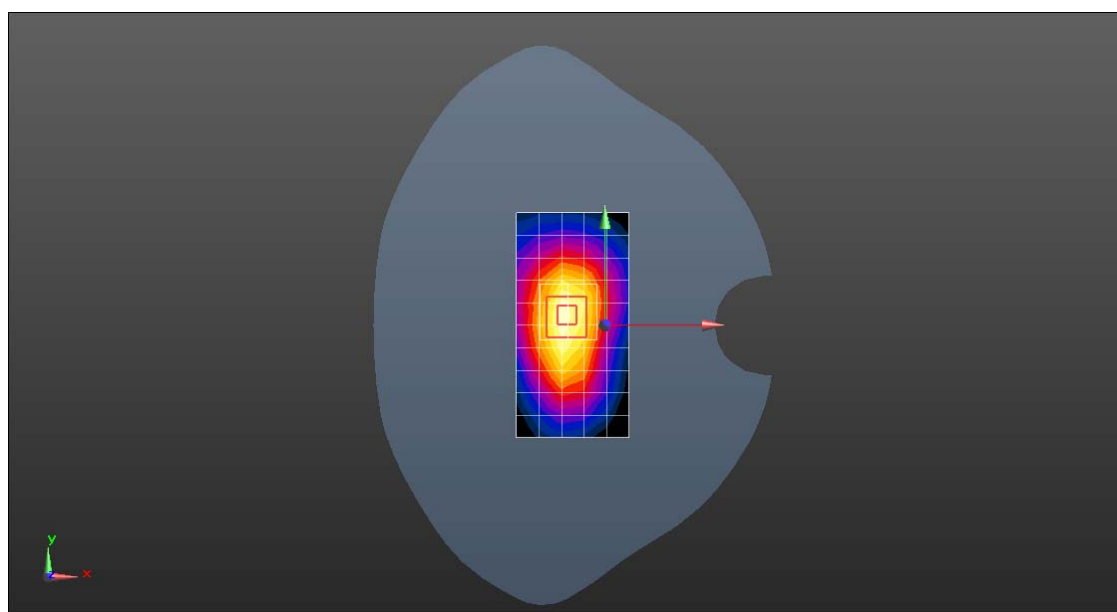

0 dB = 1.11 W/kg = 0.45 dBW/kg

Test Laboratory: HUAWEI SAR/HAC Lab

H1611 Wifi 2.4G 802.11b 6CH Left tilt

DUT: H1611; Type: Smart Phone; Serial: SAR2

Communication System: UID 0, WiFi(802.11a/b/g/n/ac) (0); Frequency: 2437 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 2437$ MHz; $\sigma = 1.804$ S/m; $\epsilon_r = 40.264$; $\rho = 1000$ kg/m³

Phantom section: Left Section

DASY Configuration:

- ζ Probe: EX3DV4 - SN3744; ConvF(6.84, 6.84, 6.84); Calibrated: 2015-7-24;
- ζ Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- ζ Electronics: DAE4 Sn1236; Calibrated: 2015-11-23
- ζ Phantom: SAM4; Type: SAM; Serial: TP-1620
- ζ DASY52 52.8.8(1222);

Configuration/Head/Area Scan (10x17x1):

Measurement grid: $dx=12$ mm, $dy=12$ mm
Maximum value of SAR (measured) = 1.10 W/kg



Configuration/Head/Zoom Scan (7x7x7)/Cube 0:

Reference Value = 9.879 V/m; Power Drift = 0.07 dB

Peak SAR (extrapolated) = 1.47 W/kg

SAR(1 g) = 0.689 W/kg; SAR(10 g) = 0.318 W/kg

Maximum value of SAR (measured) = 1.18 W/kg

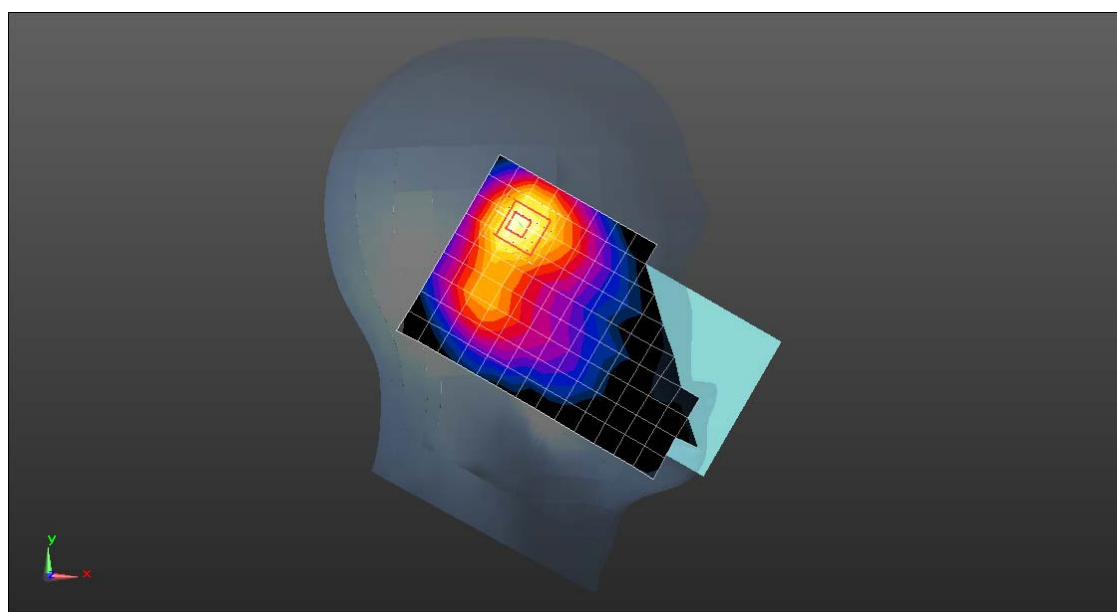

0 dB = 1.18 W/kg = 0.70 dBW/kg

Test Laboratory: HUAWEI SAR/HAC Lab

H1611 Wifi 2.4G 802.11b 6CH Back Side 15mm**DUT: H1611; Type: Smart Phone; Serial: SAR2**

Communication System: UID 0, WiFi(802.11a/b/g/n/ac) (0); Frequency: 2437 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 2437$ MHz; $\sigma = 1.995$ S/m; $\epsilon_r = 52.255$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- ζ Probe: EX3DV4 - SN3744; ConvF(6.77, 6.77, 6.77); Calibrated: 2015-7-24;
- ζ Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- ζ Electronics: DAE4 Sn1236; Calibrated: 2015-11-23
- ζ Phantom: SAM3; Type: SAM; Serial: TP-1597
- ζ DASY52 52.8.8(1222);

Configuration/Body/Area Scan (10x17x1): Measurement grid: $dx=12$ mm, $dy=12$ mm

Maximum value of SAR (measured) = 0.124 W/kg



Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 2.294 V/m; Power Drift = 0.17 dB

Peak SAR (extrapolated) = 0.176 W/kg

SAR(1 g) = 0.089 W/kg; SAR(10 g) = 0.047 W/kg

Maximum value of SAR (measured) = 0.139 W/kg

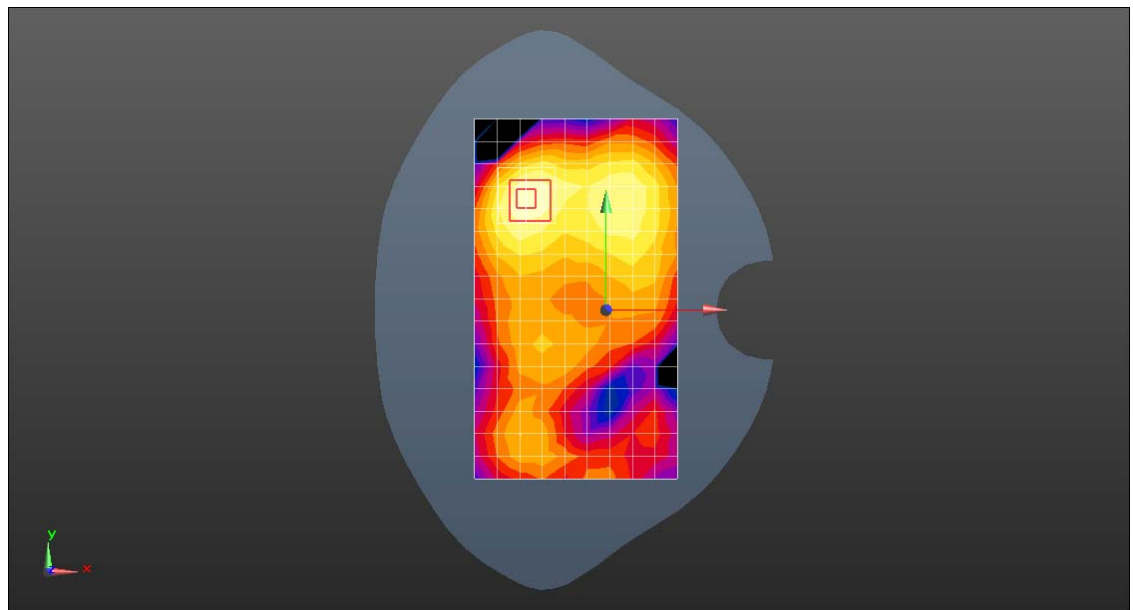

0 dB = 0.139 W/kg = -8.58 dBW/kg

Test Laboratory: HUAWEI SAR/HAC Lab

H1611 Wifi 2.4G 802.11b 6CH Back Side 10mm**DUT: H1611; Type: Smart Phone; Serial: SAR2**

Communication System: UID 0, WiFi(802.11a/b/g/n/ac) (0); Frequency: 2437 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 2437$ MHz; $\sigma = 1.995$ S/m; $\epsilon_r = 52.255$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- ζ Probe: EX3DV4 - SN3744; ConvF(6.77, 6.77, 6.77); Calibrated: 2015-7-24;
- ζ Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- ζ Electronics: DAE4 Sn1236; Calibrated: 2015-11-23
- ζ Phantom: SAM3; Type: SAM; Serial: TP-1597
- ζ DASY52 52.8.8(1222);

Configuration/Body/Area Scan (10x17x1): Measurement grid: $dx=12$ mm, $dy=12$ mm

Maximum value of SAR (measured) = 0.261 W/kg



Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 2.822 V/m; Power Drift = 0.14 dB

Peak SAR (extrapolated) = 0.395 W/kg

SAR(1 g) = 0.185 W/kg; SAR(10 g) = 0.091 W/kg

Maximum value of SAR (measured) = 0.304 W/kg

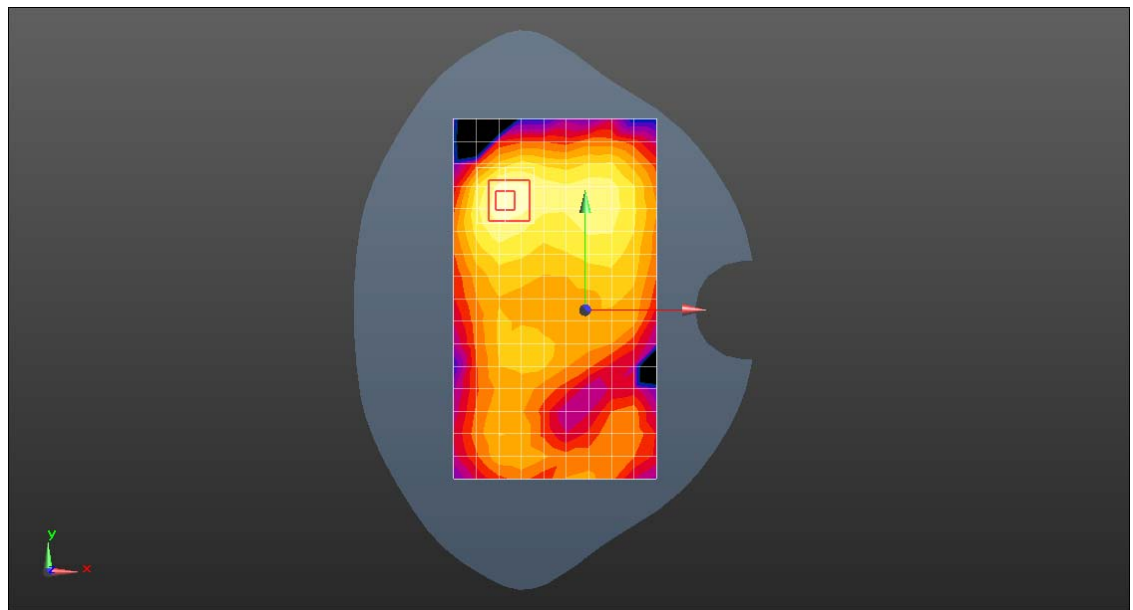

0 dB = 0.304 W/kg = -5.18 dBW/kg

Test Laboratory: HUAWEI SAR/HAC Lab

H1611 Wifi 5G 802.11a 52CH Right touch

DUT: H1611; Type: Smart Phone; Serial: SAR2

Communication System: UID 0, WiFi(802.11a/b/g/n/ac) (0); Frequency: 5260 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 5260$ MHz; $\sigma = 4.743$ S/m; $\epsilon_r = 36.409$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY Configuration:

- ζ Probe: EX3DV4 - SN3736; ConvF(4.57, 4.57, 4.57); Calibrated: 2016-4-26;
- ζ Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = 1.0, 25.0$
- ζ Electronics: DAE4 Sn1236; Calibrated: 2015-11-23
- ζ Phantom: SAM4; Type: SAM; Serial: TP-1620
- ζ DASY52 52.8.8(1222);

Configuration/Head/Area Scan (13x21x1): Measurement grid: $dx=10$ mm, $dy=10$ mm

Maximum value of SAR (measured) = 1.20 W/kg



Configuration/Head/Zoom Scan (8x8x7)/Cube 0: Measurement grid: $dx=4$ mm, $dy=4$ mm, $dz=1.4$ mm

Reference Value = 13.79 V/m; Power Drift = -0.09 dB

Peak SAR (extrapolated) = 3.95 W/kg

SAR(1 g) = 0.683 W/kg; SAR(10 g) = 0.144 W/kg

Maximum value of SAR (measured) = 1.99 W/kg

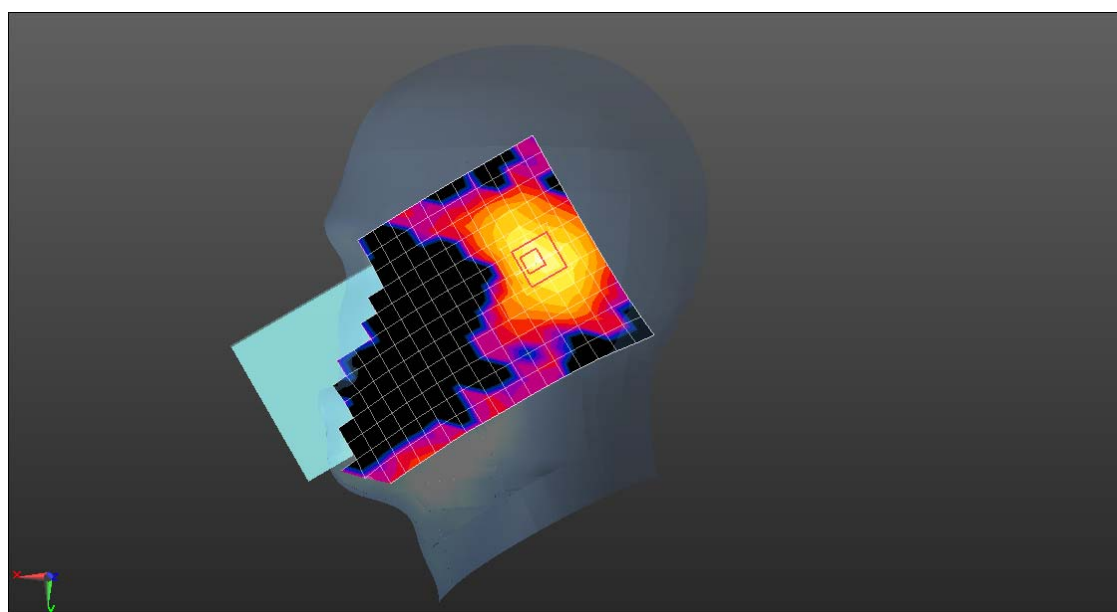

0 dB = 1.99 W/kg = 3.00 dBW/kg

Test Laboratory: HUAWEI SAR/HAC Lab

H1611 Wifi 5G 802.11a 157CH Back Side 15mm**DUT: H1611; Type: Smart Phone; Serial: SAR2**

Communication System: UID 0, WiFi(802.11a/b/g/n/ac) (0); Frequency: 5785 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 5785$ MHz; $\sigma = 6.187$ S/m; $\epsilon_r = 48.514$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- ζ Probe: EX3DV4 - SN3736; ConvF(3.6, 3.6, 3.6); Calibrated: 2016-4-26;
- ζ Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = 1.0, 25.0$
- ζ Electronics: DAE4 Sn1236; Calibrated: 2015-11-23
- ζ Phantom: SAM4; Type: SAM; Serial: TP-1620
- ζ DASY52 52.8.8(1222);

Configuration/Body/Area Scan (12x21x1): Measurement grid: $dx=10$ mm, $dy=10$ mm

Maximum value of SAR (measured) = 0.315 W/kg



Configuration/Body/Zoom Scan (9x9x7)/Cube 0: Measurement grid: $dx=4$ mm, $dy=4$ mm, $dz=1.4$ mm

Reference Value = 0.7350 V/m; Power Drift = 0.18 dB

Peak SAR (extrapolated) = 0.603 W/kg

SAR(1 g) = 0.156 W/kg; SAR(10 g) = 0.057 W/kg

Maximum value of SAR (measured) = 0.384 W/kg

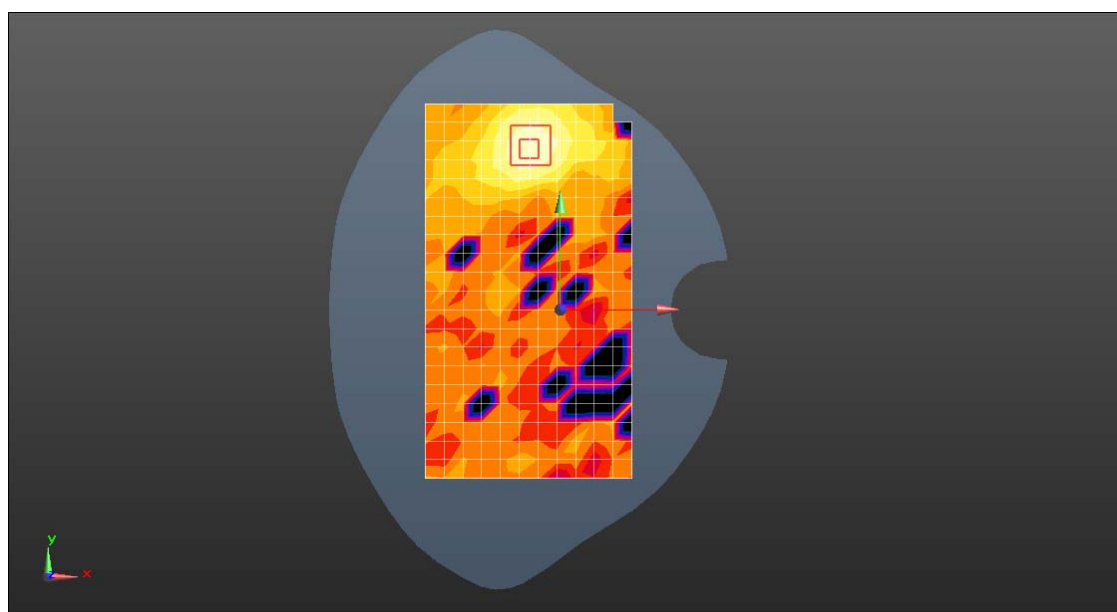

0 dB = 0.384 W/kg = -4.16 dBW/kg

Test Laboratory: HUAWEI SAR/HAC Lab

H1611 Wifi 5G 802.11a 128CH Top Side 0mm**DUT: H1611; Type: Smart Phone; Serial: SAR2**

Communication System: UID 0, WiFi(802.11a/b/g/n/ac) (0); Frequency: 5640 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 5640$ MHz; $\sigma = 5.989$ S/m; $\epsilon_r = 47.836$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- ζ Probe: EX3DV4 - SN3736; ConvF(3.48, 3.48, 3.48); Calibrated: 2016-4-26;
- ζ Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = 1.0, 25.0$
- ζ Electronics: DAE4 Sn1236; Calibrated: 2015-11-23
- ζ Phantom: SAM4; Type: SAM; Serial: TP-1620
- ζ DASY52 52.8.8(1222);

Configuration/Body/Area Scan (7x13x1): Measurement grid: $dx=10$ mm, $dy=10$ mm

Maximum value of SAR (measured) = 3.14 W/kg



Configuration/Body/Zoom Scan (8x9x7)/Cube 0: Measurement grid: $dx=4$ mm, $dy=4$ mm, $dz=1.4$ mm

Reference Value = 16.25 V/m; Power Drift = 0.00 dB

Peak SAR (extrapolated) = 25.0 W/kg

SAR(1 g) = 3.31 W/kg; SAR(10 g) = 0.604 W/kg

Maximum value of SAR (measured) = 11.0 W/kg

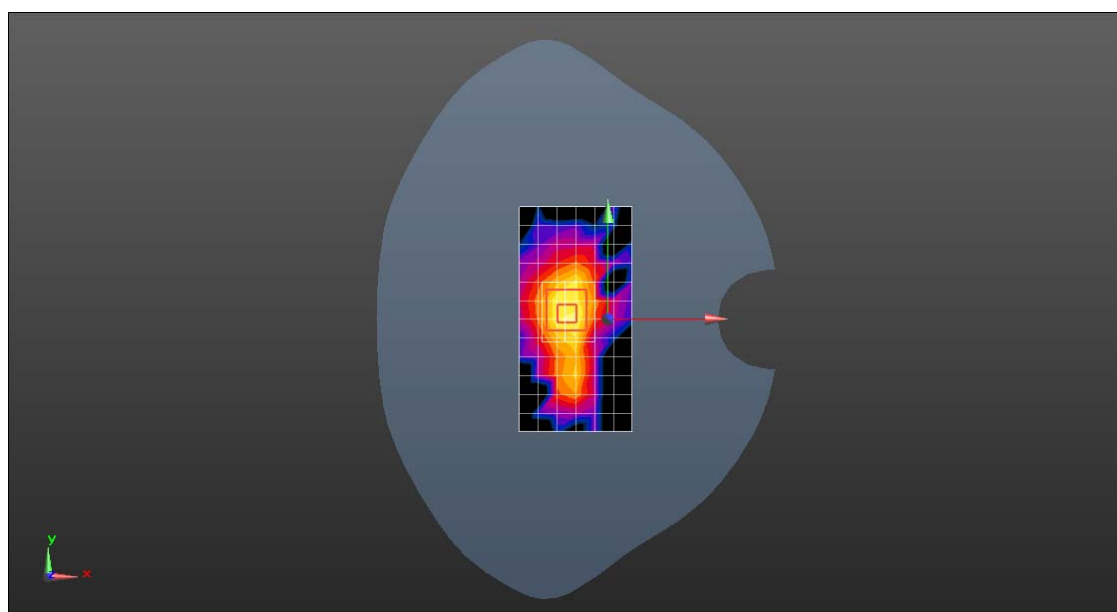

0 dB = 11.0 W/kg = 10.41 dBW/kg

Test Laboratory: HUAWEI SAR/HAC Lab

H1611 BT 39CH Front Side 15mm**DUT: H1611; Type: Smart Phone; Serial: SAR2**

Communication System: UID 0, BT (0); Frequency: 2441 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 2441$ MHz; $\sigma = 1.993$ S/m; $\epsilon_r = 54.067$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- ζ Probe: EX3DV4 - SN7351; ConvF(7.55, 7.55, 7.55); Calibrated: 2015-10-30;
- ζ Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- ζ Electronics: DAE4 Sn1236; Calibrated: 2015-11-23
- ζ Phantom: SAM3; Type: SAM; Serial: TP-1597
- ζ DASY52 52.8.8(1222);

Configuration/Body/Area Scan (10x17x1): Measurement grid: $dx=12$ mm, $dy=12$ mm

Maximum value of SAR (measured) = 0.0133 W/kg



Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 1.244 V/m; Power Drift = -0.00 dB

Peak SAR (extrapolated) = 0.00930 W/kg

SAR(1 g) = 0.00426 W/kg; SAR(10 g) = 0.00269 W/kg

Maximum value of SAR (measured) = 0.00625 W/kg

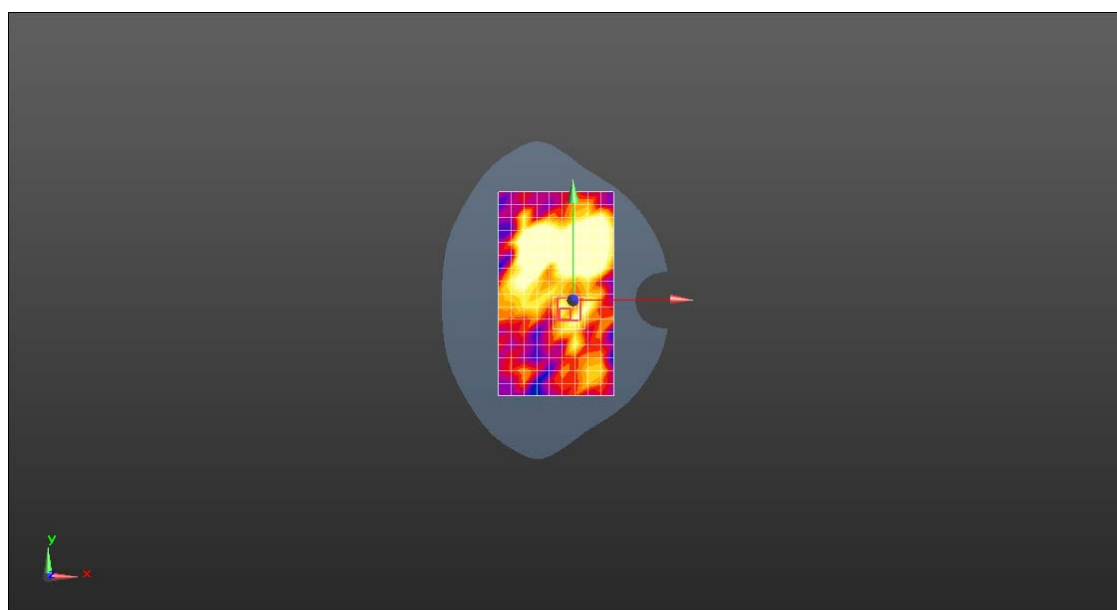

Test Laboratory: HUAWEI SAR/HAC Lab

H1611 BT 39CH Top Side 0mm**DUT: H1611; Type: Smart Phone; Serial: SAR2**

Communication System: UID 0, BT (0); Frequency: 2441 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 2441$ MHz; $\sigma = 1.993$ S/m; $\epsilon_r = 54.067$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- ζ Probe: EX3DV4 - SN7351; ConvF(7.55, 7.55, 7.55); Calibrated: 2015-10-30;
- ζ Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- ζ Electronics: DAE4 Sn1236; Calibrated: 2015-11-23
- ζ Phantom: SAM3; Type: SAM; Serial: TP-1597
- ζ DASY52 52.8.8(1222);

Configuration/Body/Area Scan (6x17x1): Measurement grid: $dx=12$ mm, $dy=12$ mm

Maximum value of SAR (measured) = 0.162 W/kg



Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 4.690 V/m; Power Drift = -0.08 dB

Peak SAR (extrapolated) = 0.359 W/kg

SAR(1 g) = 0.168 W/kg; SAR(10 g) = 0.070 W/kg

Maximum value of SAR (measured) = 0.290 W/kg

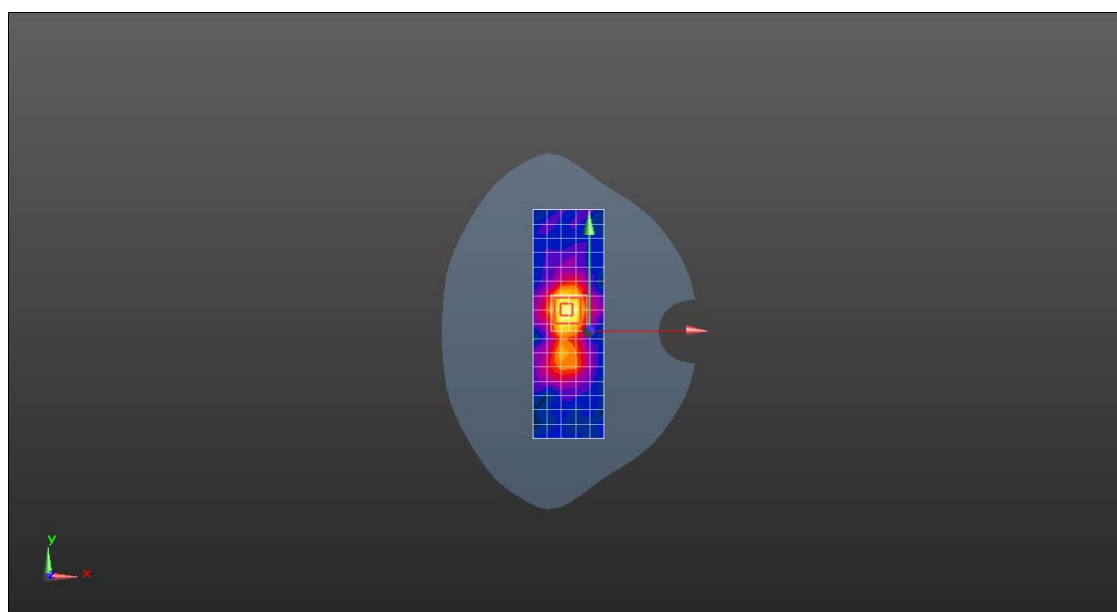

0 dB = 0.290 W/kg = -5.38 dBW/kg