



The Photos of SAR test

No. I17Z60534-SEM01

For

Huawei Technologies Co., Ltd.

LTE/WCDMA/GSM digital mobile phone

Modelname: H1711

With

Hardware Version: HL3TRTM

Software Version: H1711C07B016

FCC ID: QISH1711



中国认可
国际互认
检测
TESTING
CNAS L0570

Note:

The test results in this test report relate only to the devices specified in this report. This report shall not be reproduced except in full without the written approval of CTTL.

Test Laboratory:

CTTL, Telecommunication Technology Labs, Academy of Telecommunication Research, MIIT


No. 51 Shouxiang Science Building, Xueyuan Road, Haidian District, Beijing, P. R. China100191

Tel:+86(0)10-62304633-2512,Fax:+86(0)10-62304633-2504


Email:ctl_terminals@catr.cn, website:www.chinattl.com




Picture 1: Constituents of the sample

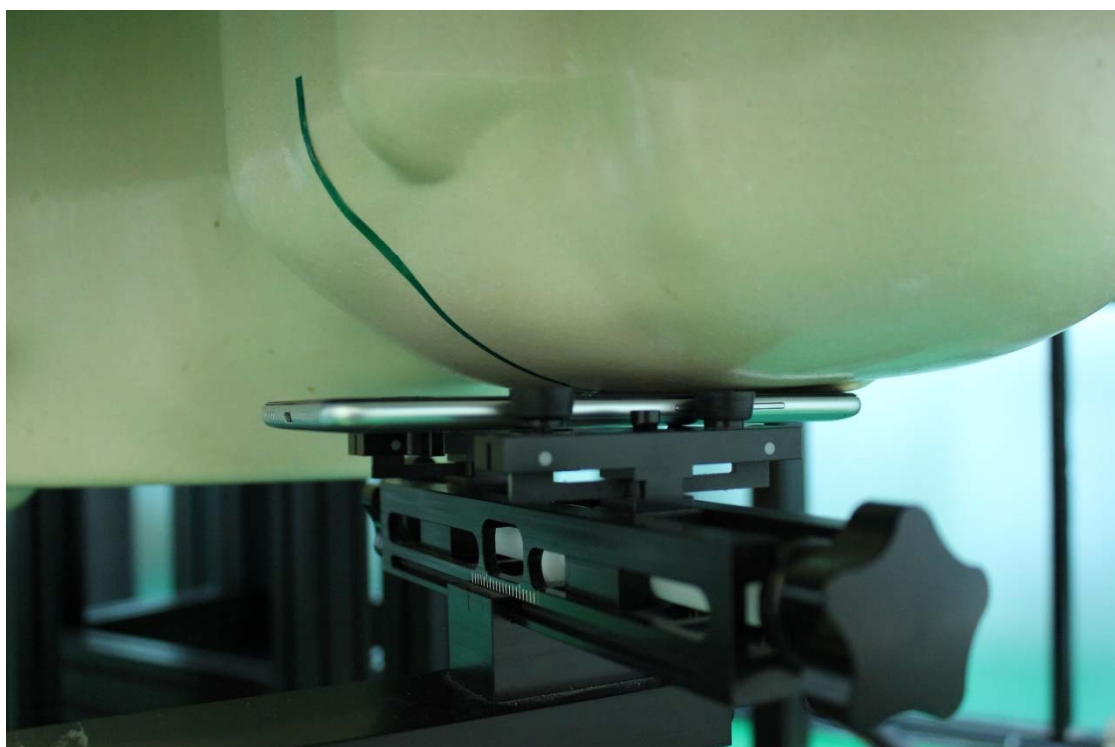


Picture 2: Left Hand Touch Cheek Position

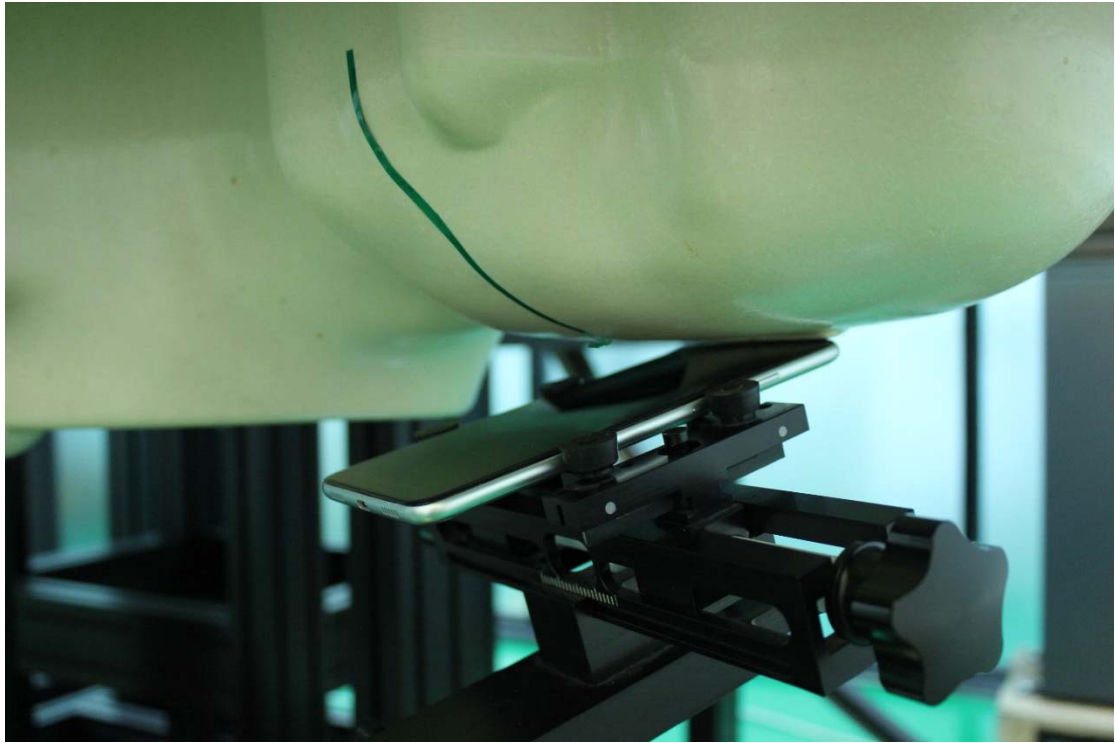

Picture 3: Left Hand Tilt 15° Position

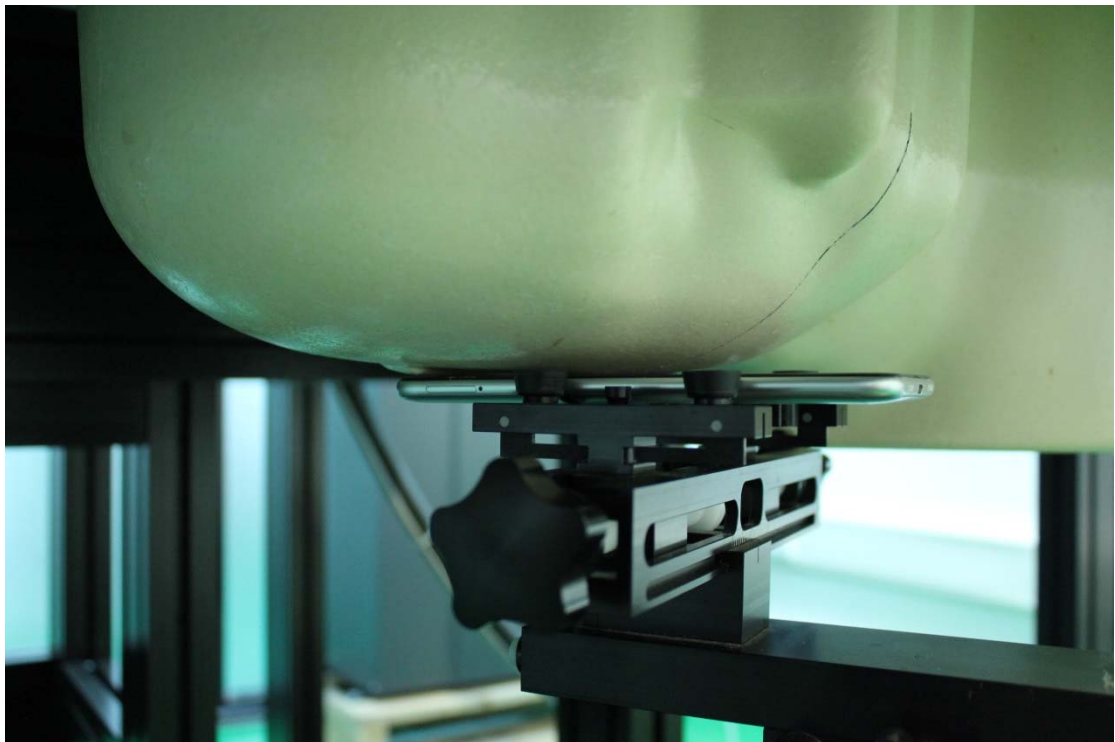

Picture 4: Right Hand Touch Cheek Position

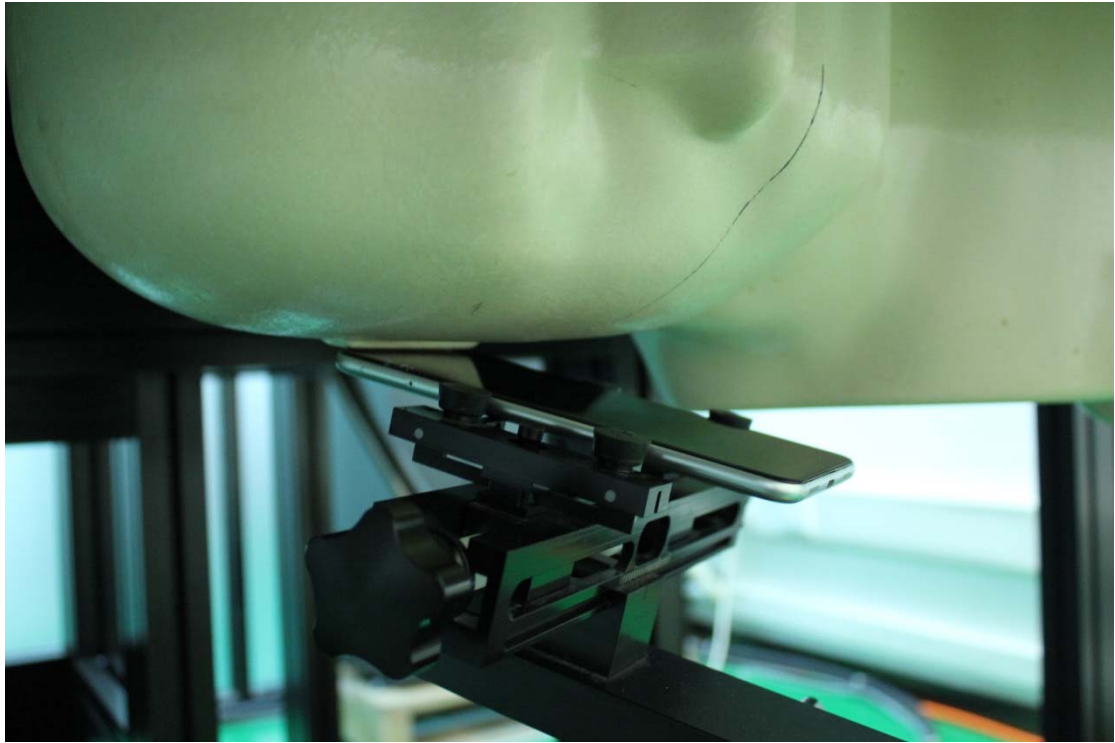

Picture 5: Right Hand Tilt 15° Position

Test positions for body:

The Body SAR is tested at the following 6 test positions all with the distance =10/15/0mm between the EUT and the phantom bottom:



Picture 6: Front 10mm




Picture 7: Rear 10mm




Picture 8: Left 10mm




Picture 9: Right 10mm

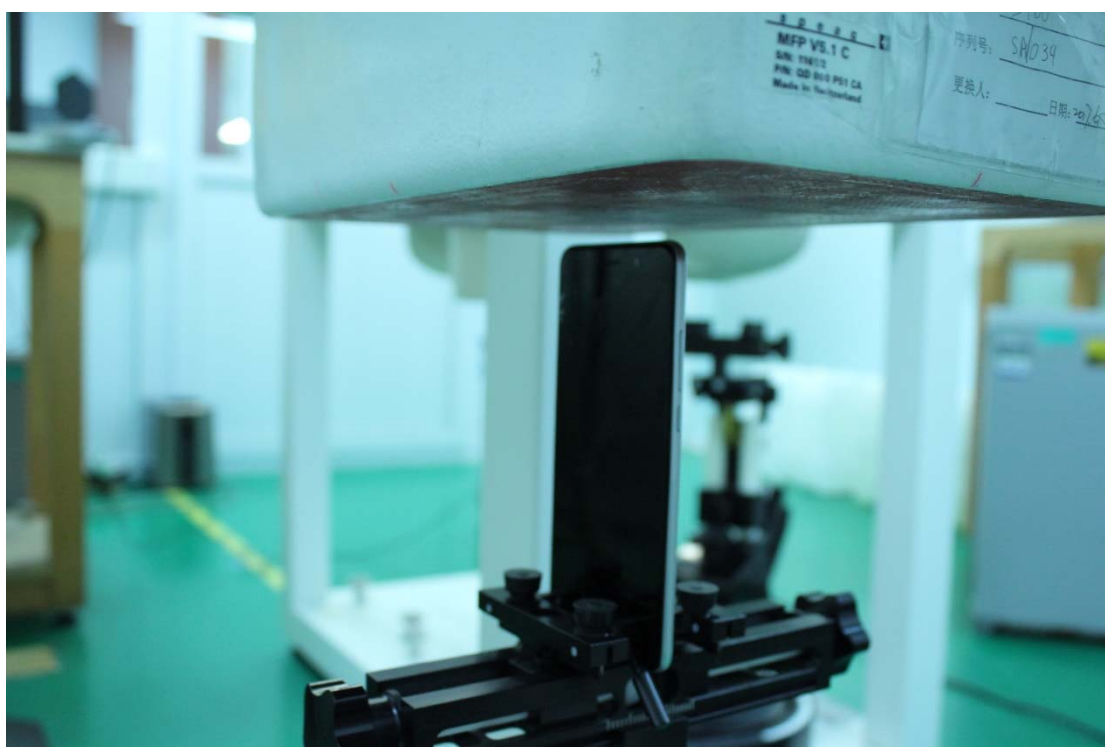


Picture 10: Top 10mm

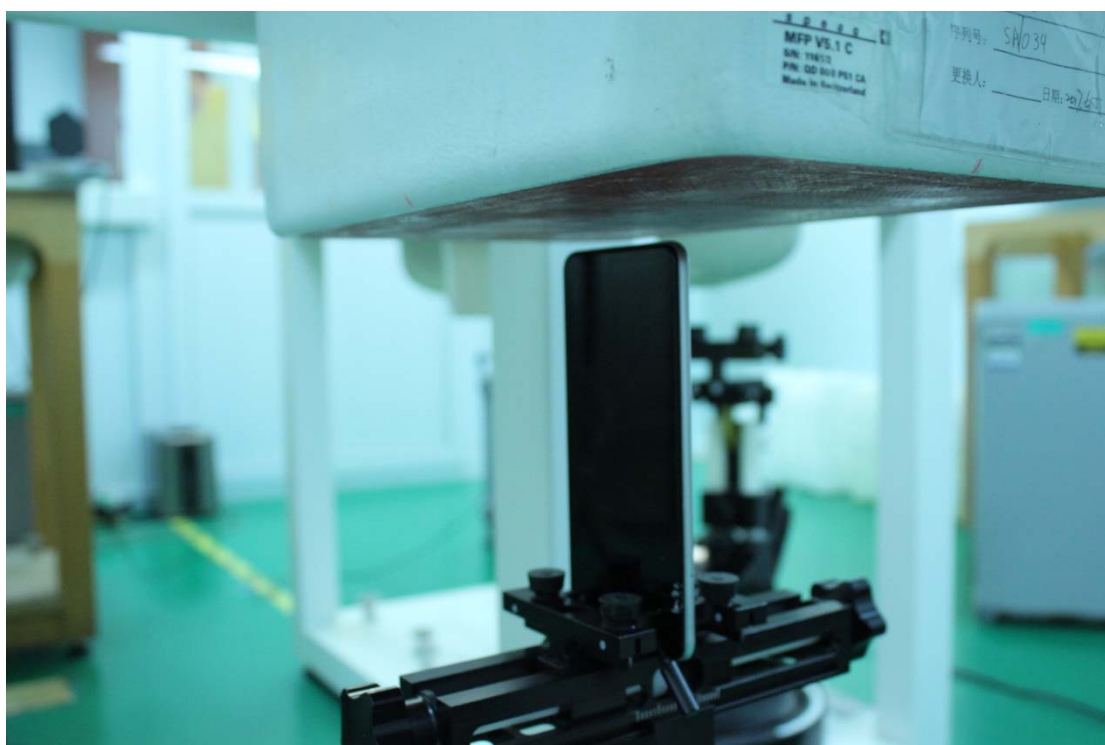

Picture 11: Bottom 10mm

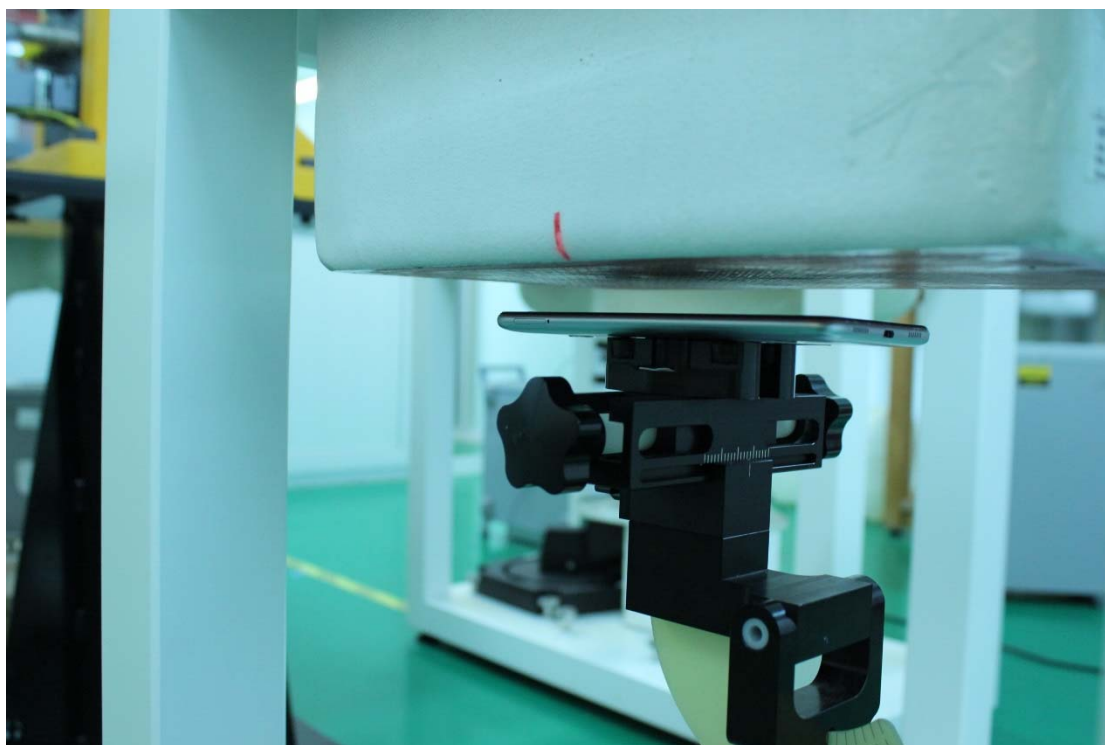


Picture 12: Front 15mm

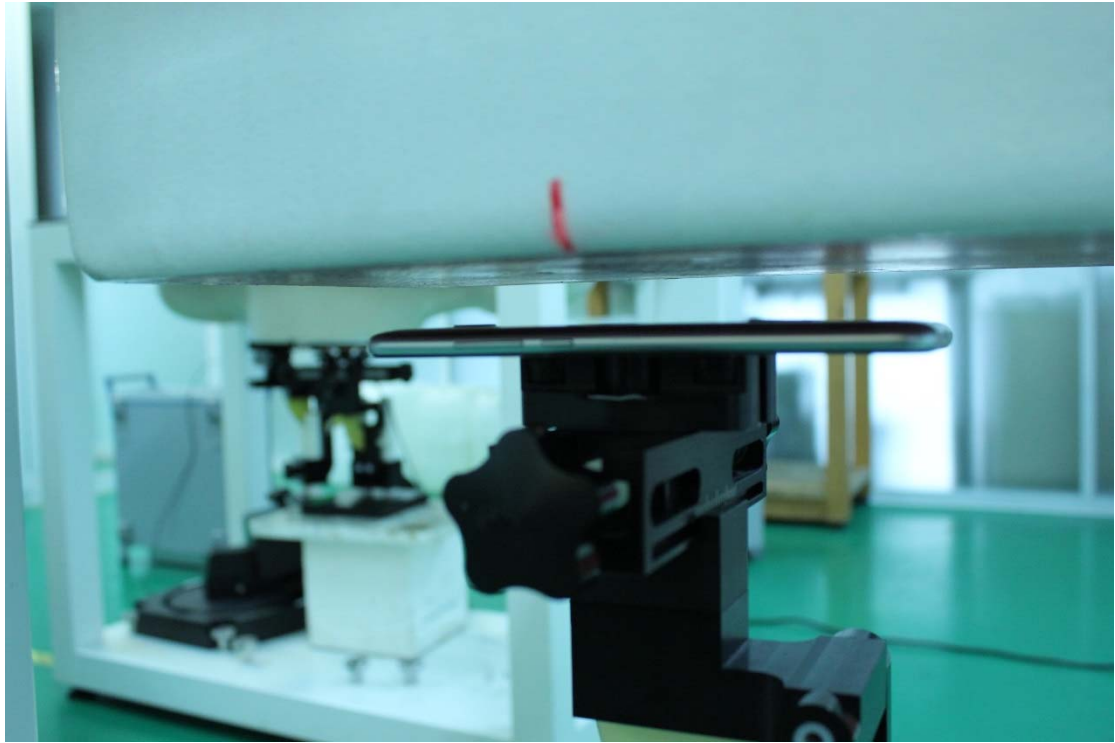


Picture 13: Rear 15mm



Picture 12: Front 0mm

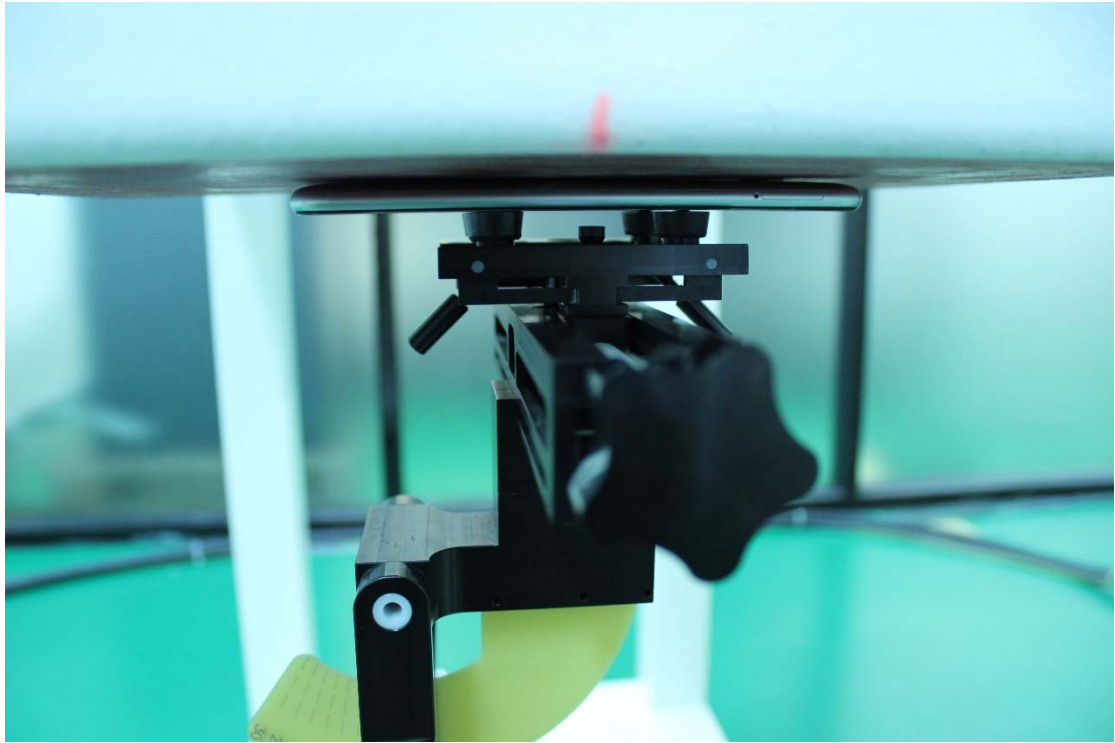

Picture 13: Rear 0mm

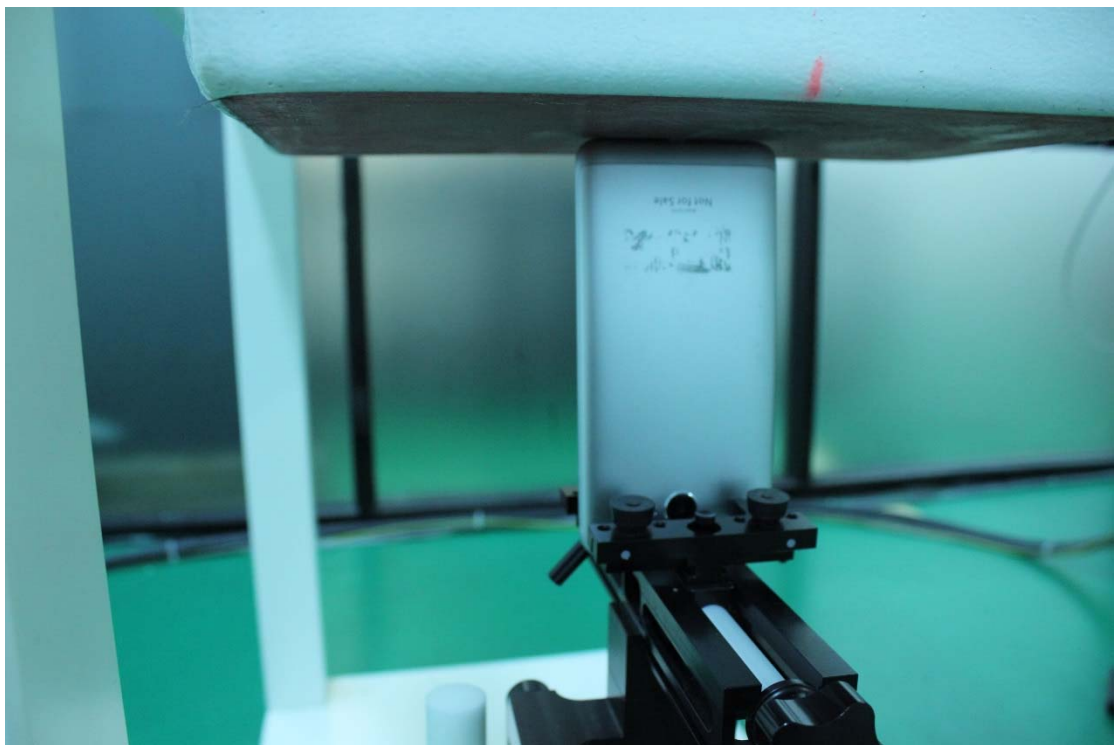

Picture 11: Bottom 0mm