




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM170800926003

Page: 201 of 411

Test mode:	802.11ac(HT20)	Frequency(MHz):	5785	Peak	Horizontal
------------	----------------	-----------------	------	------	------------

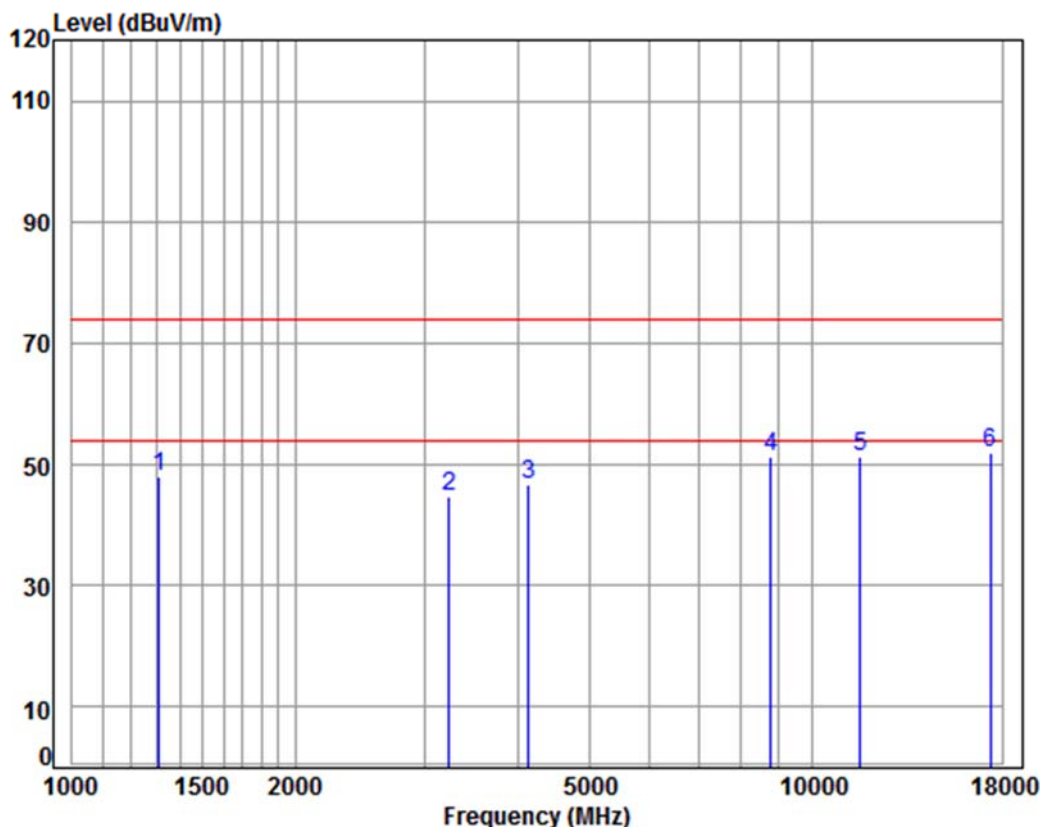

Condition: 3m HORIZONTAL

Job No : 09260RG

Mode : 5785 TX RSE

: 5G WIFI 11AC20

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1312.187	4.84	25.01	38.06	56.37	48.16	74.00	-25.84	Peak
2	3233.260	6.21	31.74	37.93	44.85	44.87	74.00	-29.13	peak
3	4133.699	7.14	33.60	38.07	44.10	46.77	74.00	-27.23	peak
4	8764.146	10.34	36.32	35.63	40.45	51.48	74.00	-22.52	Peak
5	11570.000	12.17	38.17	36.10	37.16	51.40	74.00	-22.60	peak
6	pp17355.000	15.92	43.23	36.12	28.81	51.84	74.00	-22.16	peak




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM170800926003

Page: 202 of 411

Test mode:	802.11ac(HT20)	Frequency(MHz):	5825	Peak	Vertical
------------	----------------	-----------------	------	------	----------

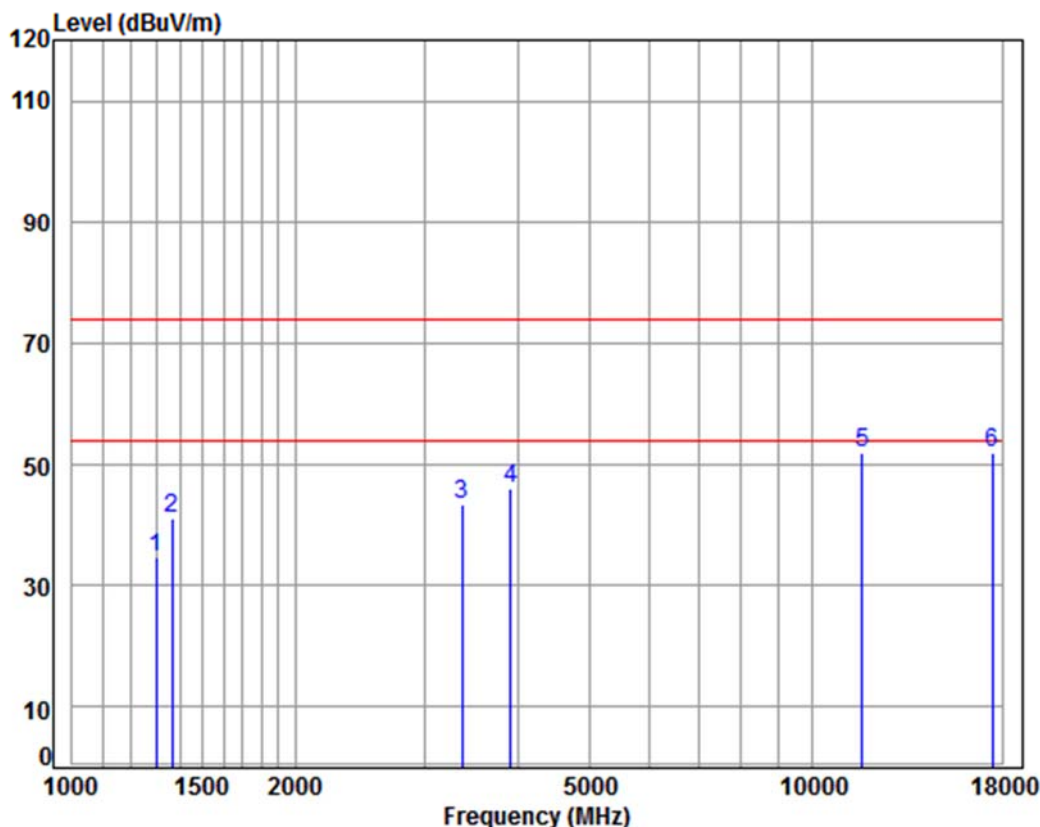

Condition: 3m VERTICAL

Job No : 09260RG

Mode : 5825 TX RSE

: 5G WIFI 11AC20

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1297.103	4.79	24.94	38.06	42.88	34.55	74.00	-39.45	peak
2	1366.374	5.04	25.25	38.05	48.94	41.18	74.00	-32.82	peak
3	3357.061	6.33	31.96	37.94	43.06	43.41	74.00	-30.59	peak
4	3912.809	6.89	33.37	37.99	43.99	46.26	74.00	-27.74	peak
5	pp11650.000	12.20	38.25	36.19	37.62	51.88	74.00	-22.12	peak
6	17475.000	15.65	43.37	36.06	28.89	51.85	74.00	-22.15	peak




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM170800926003

Page: 203 of 411

Test mode:	802.11ac(HT20)	Frequency(MHz):	5825	Peak	Horizontal
------------	----------------	-----------------	------	------	------------

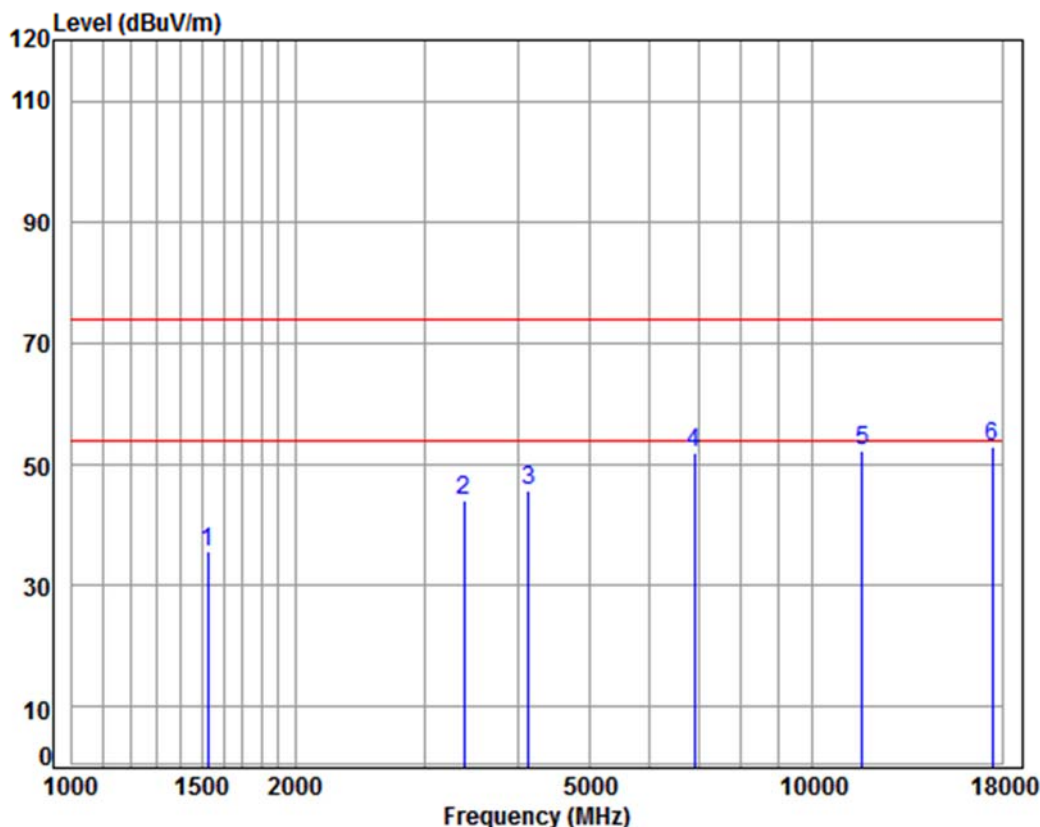

Condition: 3m HORIZONTAL

Job No : 09260RG

Mode : 5825 TX RSE

: 5G WIFI 11AC20

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1525.000	5.45	25.91	38.04	42.47	35.79	74.00	-38.21	Peak
2	3386.297	6.36	32.01	37.94	43.75	44.18	74.00	-29.82	peak
3	4133.699	7.14	33.60	38.07	43.27	45.94	74.00	-28.06	peak
4	6914.763	10.36	36.27	37.38	42.61	51.86	74.00	-22.14	Peak
5	11650.000	12.20	38.25	36.19	37.90	52.16	74.00	-21.84	peak
6	pp17475.000	15.65	43.37	36.06	30.15	53.11	74.00	-20.89	peak




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM170800926003

Page: 204 of 411

Test mode:	802.11n(HT40)	Frequency(MHz):	5190	Peak	Vertical
------------	---------------	-----------------	------	------	----------

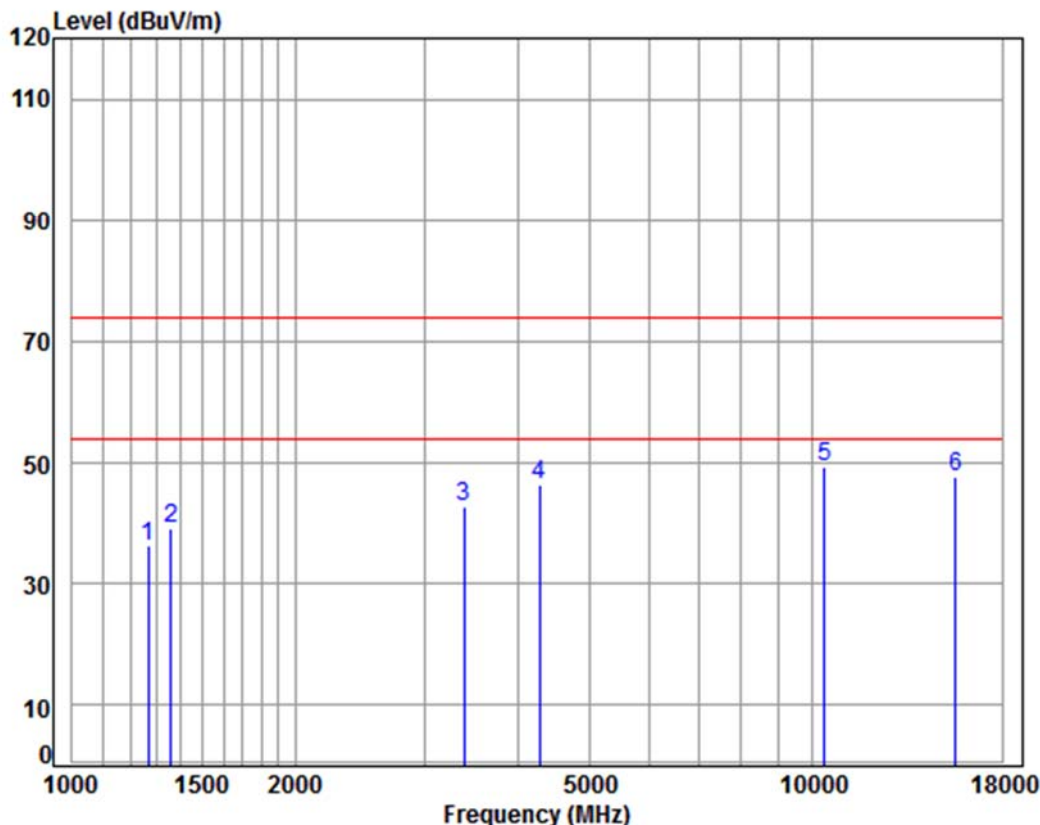

Condition: 3m HORIZONTAL

Job No : 09260RG

Mode : 5190 TX RSE

: 5G WIFI 11N40

	Freq	Cable Loss	Ant Factor	Preamplifier Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1267.454	4.68	24.80	38.07	45.02	36.43	74.00	-37.57	peak
2	1362.430	5.02	25.23	38.06	46.97	39.16	74.00	-34.84	peak
3	3386.297	6.36	32.01	37.94	42.42	42.85	74.00	-31.15	peak
4	4279.589	7.31	33.60	38.15	43.70	46.46	74.00	-27.54	peak
5	pp10380.000	11.21	37.22	35.10	36.12	49.45	74.00	-24.55	peak
6	15570.000	14.35	41.37	38.26	30.36	47.82	74.00	-26.18	peak




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM170800926003

Page: 205 of 411

Test mode:	802.11n(HT40)	Frequency(MHz):	5190	Peak	Horizontal
------------	---------------	-----------------	------	------	------------

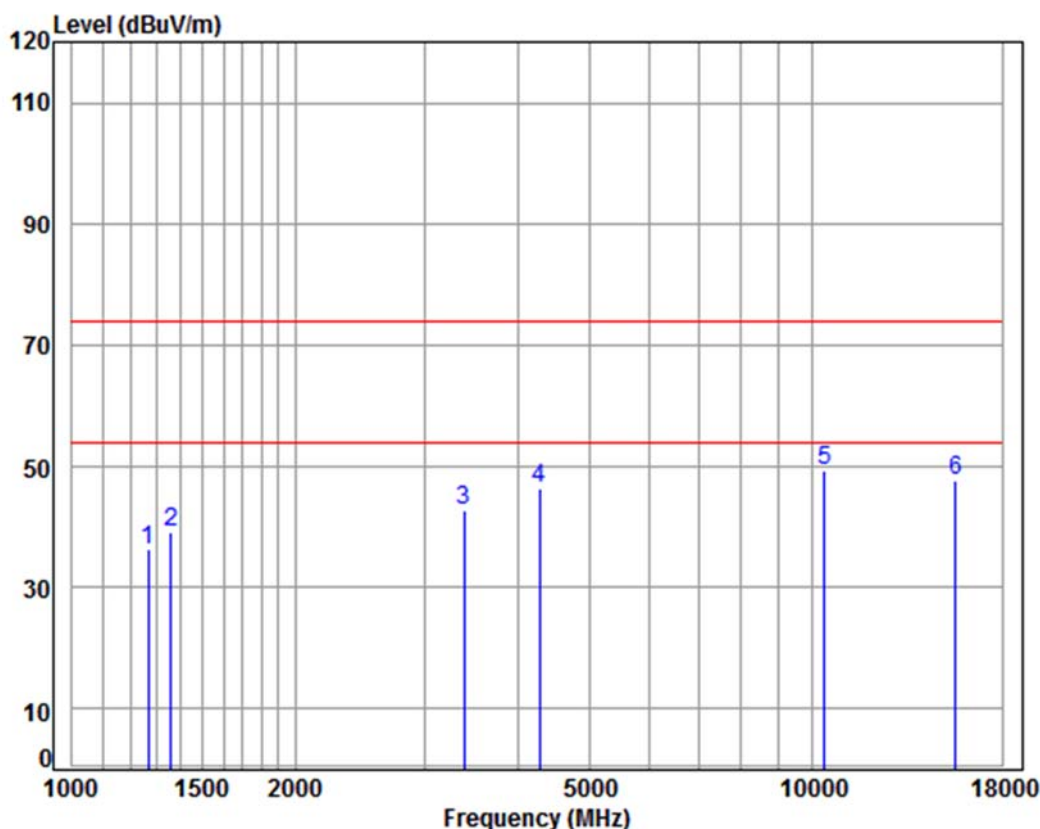

Condition: 3m HORIZONTAL

Job No : 09260RG

Mode : 5190 TX RSE

: 5G WIFI 11N40

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1267.454	4.68	24.80	38.07	45.02	36.43	74.00	-37.57	peak
2	1362.430	5.02	25.23	38.06	46.97	39.16	74.00	-34.84	peak
3	3386.297	6.36	32.01	37.94	42.42	42.85	74.00	-31.15	peak
4	4279.589	7.31	33.60	38.15	43.70	46.46	74.00	-27.54	peak
5	pp10380.000	11.21	37.22	35.10	36.12	49.45	74.00	-24.55	peak
6	15570.000	14.35	41.37	38.26	30.36	47.82	74.00	-26.18	peak




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM170800926003

Page: 206 of 411

Test mode:	802.11n(HT40)	Frequency(MHz):	5230	Peak	Vertical
------------	---------------	-----------------	------	------	----------

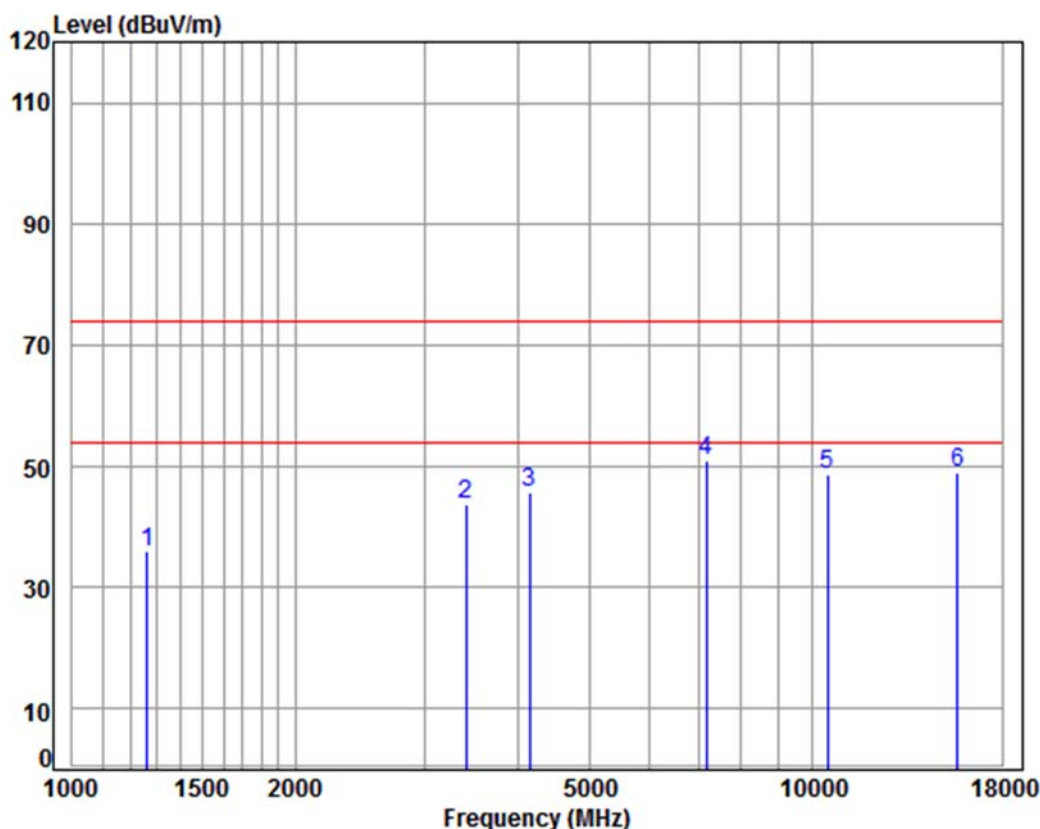

Condition: 3m VERTICAL

Job No : 09260RG

Mode : 5230 TX RSE

: 5G WIFI 11N40

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1263.796	4.66	24.79	38.07	44.60	35.98	74.00	-38.02	peak
2	3405.929	6.38	32.04	37.94	43.42	43.90	74.00	-30.10	peak
3	4145.664	7.16	33.60	38.08	43.03	45.71	74.00	-28.29	peak
4 pp	7179.527	10.08	36.43	37.13	41.73	51.11	74.00	-22.89	Peak
5	10460.000	11.26	37.14	35.14	35.33	48.59	74.00	-25.41	peak
6	15690.000	14.53	41.32	38.13	31.24	48.96	74.00	-25.04	peak




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM170800926003

Page: 207 of 411

Test mode:	802.11n(HT40)	Frequency(MHz):	5230	Peak	Horizontal
------------	---------------	-----------------	------	------	------------

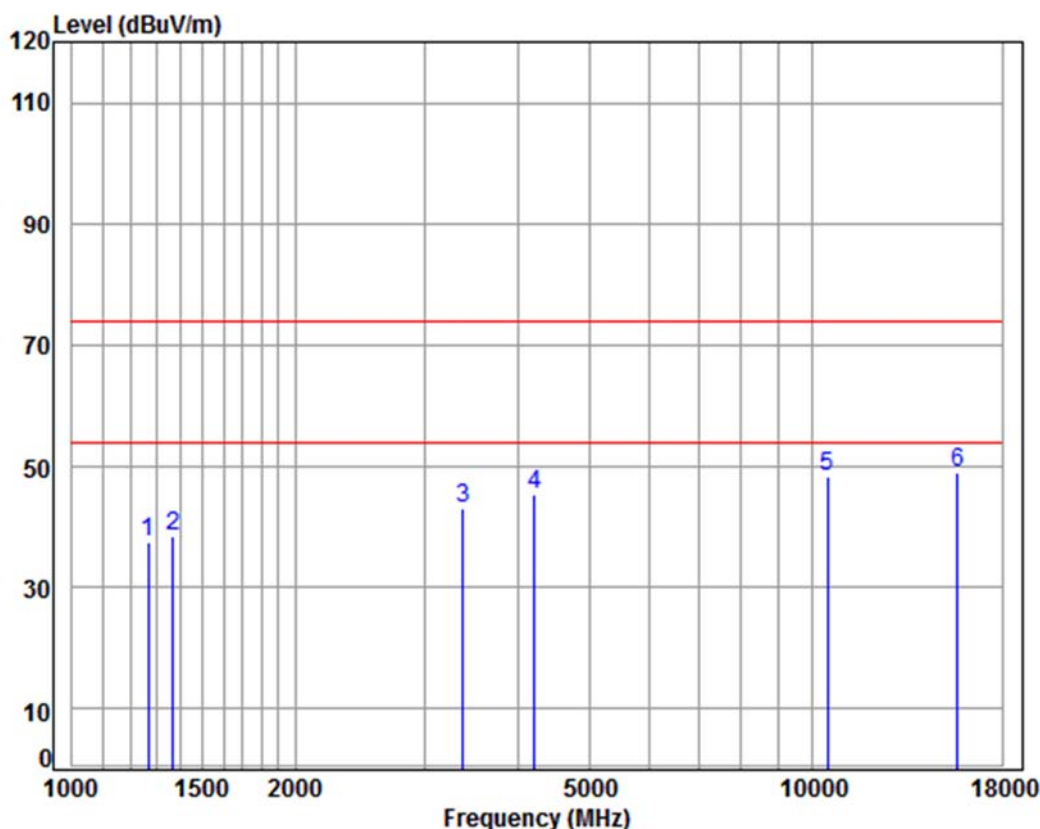

Condition: 3m HORIZONTAL

Job No : 09260RG

Mode : 5230 TX RSE

: 5G WIFI 11N40

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1267.454	4.68	24.80	38.07	46.04	37.45	74.00	-36.55	peak
2	1370.328	5.05	25.26	38.05	46.48	38.74	74.00	-35.26	peak
3	3366.778	6.34	31.97	37.94	42.70	43.07	74.00	-30.93	peak
4	4206.011	7.23	33.60	38.11	42.79	45.51	74.00	-28.49	peak
5	10460.000	11.26	37.14	35.14	35.23	48.49	74.00	-25.51	peak
6	pp15690.000	14.53	41.32	38.13	31.37	49.09	74.00	-24.91	peak




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM170800926003

Page: 208 of 411

Test mode:	802.11n(HT40)	Frequency(MHz):	5270	Peak	Vertical
------------	---------------	-----------------	------	------	----------

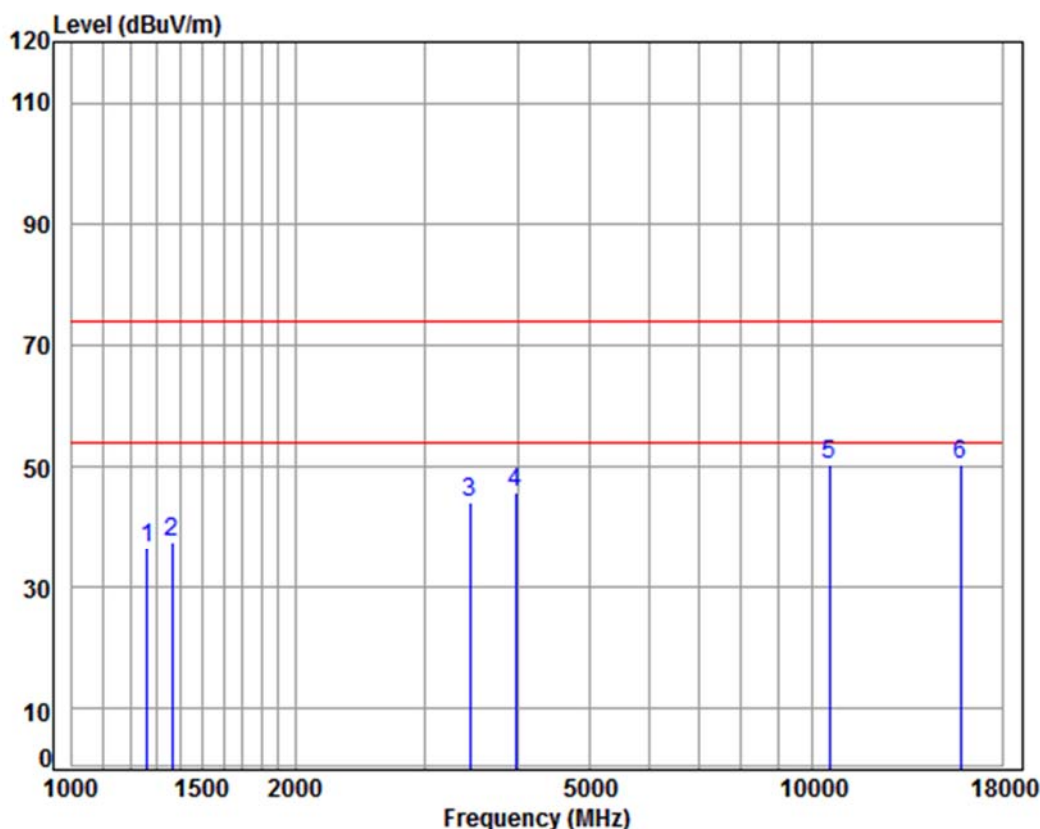

Condition: 3m HORIZONTAL

Job No : 09260RG

Mode : 5270 TX RSE

: 5G WIFI 11N40

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1263.796	4.66	24.79	38.07	45.33	36.71	74.00	-37.29	peak
2	1366.374	5.04	25.25	38.05	45.21	37.45	74.00	-36.55	peak
3	3445.535	6.41	32.11	37.95	43.46	44.03	74.00	-29.97	peak
4	3969.767	6.95	33.52	38.00	43.15	45.62	74.00	-28.38	peak
5	10540.000	11.32	37.15	35.18	37.05	50.34	74.00	-23.66	peak
6	15810.000	14.71	41.28	38.00	32.39	50.38	74.00	-23.62	peak




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM170800926003

Page: 209 of 411

Test mode:	802.11n(HT40)	Frequency(MHz):	5270	Peak	Horizontal
------------	---------------	-----------------	------	------	------------

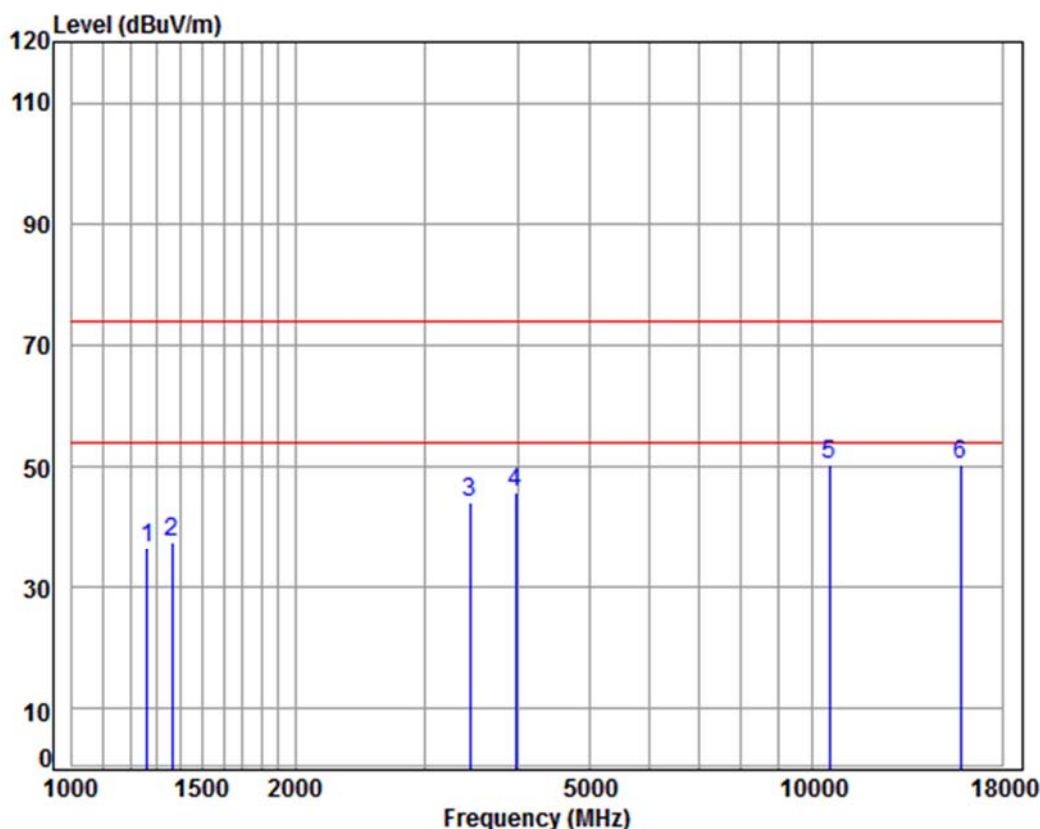

Condition: 3m HORIZONTAL

Job No : 09260RG

Mode : 5270 TX RSE

: 5G WIFI 11N40

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1263.796	4.66	24.79	38.07	45.33	36.71	74.00	-37.29	peak
2	1366.374	5.04	25.25	38.05	45.21	37.45	74.00	-36.55	peak
3	3445.535	6.41	32.11	37.95	43.46	44.03	74.00	-29.97	peak
4	3969.767	6.95	33.52	38.00	43.15	45.62	74.00	-28.38	peak
5	10540.000	11.32	37.15	35.18	37.05	50.34	74.00	-23.66	peak
6	15810.000	14.71	41.28	38.00	32.39	50.38	74.00	-23.62	peak




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM170800926003

Page: 210 of 411

Test mode:	802.11n(HT40)	Frequency(MHz):	5310	Peak	Vertical
------------	---------------	-----------------	------	------	----------

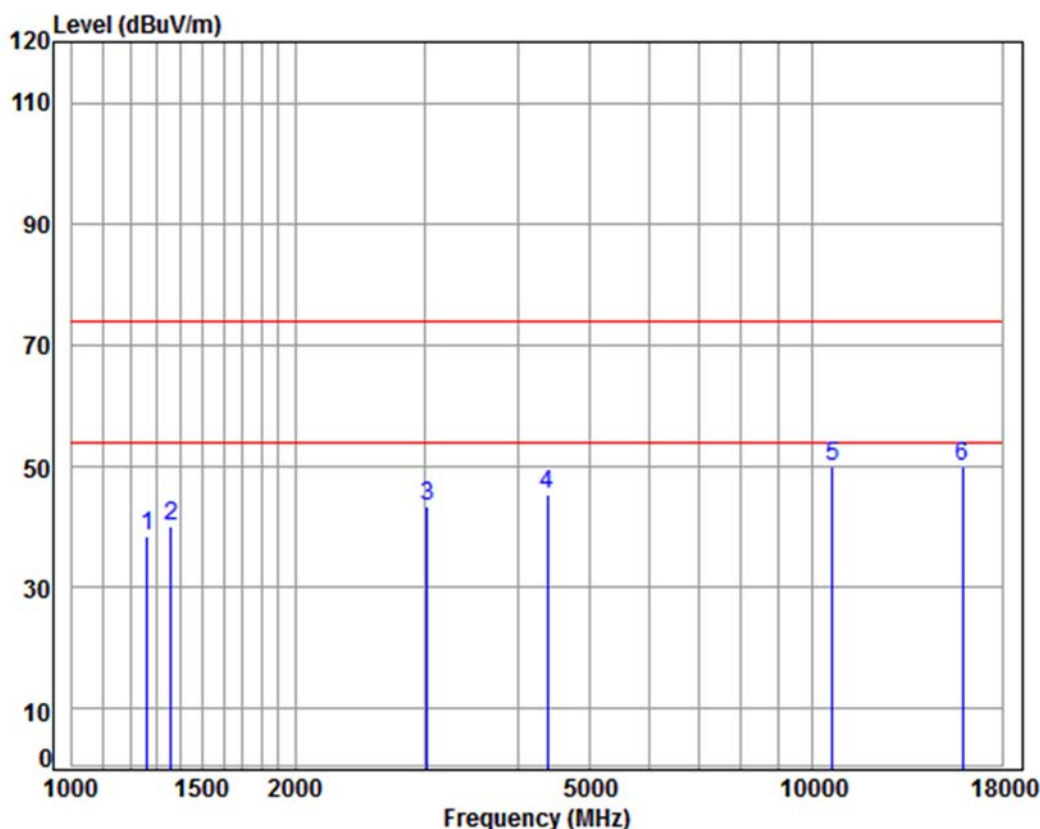

Condition: 3m VERTICAL

Job No : 09260RG

Mode : 5310 TX RSE

: 5G WIFI 11N40

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1263.796	4.66	24.79	38.07	47.05	38.43	74.00	-35.57	peak
2	1362.430	5.02	25.23	38.06	48.01	40.20	74.00	-33.80	peak
3	3016.575	6.00	31.33	37.90	44.01	43.44	74.00	-30.56	peak
4	4379.699	7.43	33.60	38.20	42.58	45.41	74.00	-28.59	peak
5	10620.000	11.37	37.25	35.22	36.71	50.11	74.00	-23.89	peak
6	pp15930.000	14.89	41.23	37.87	31.88	50.13	74.00	-23.87	peak




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM170800926003

Page: 211 of 411

Test mode:	802.11n(HT40)	Frequency(MHz):	5310	Peak	Horizontal
------------	---------------	-----------------	------	------	------------

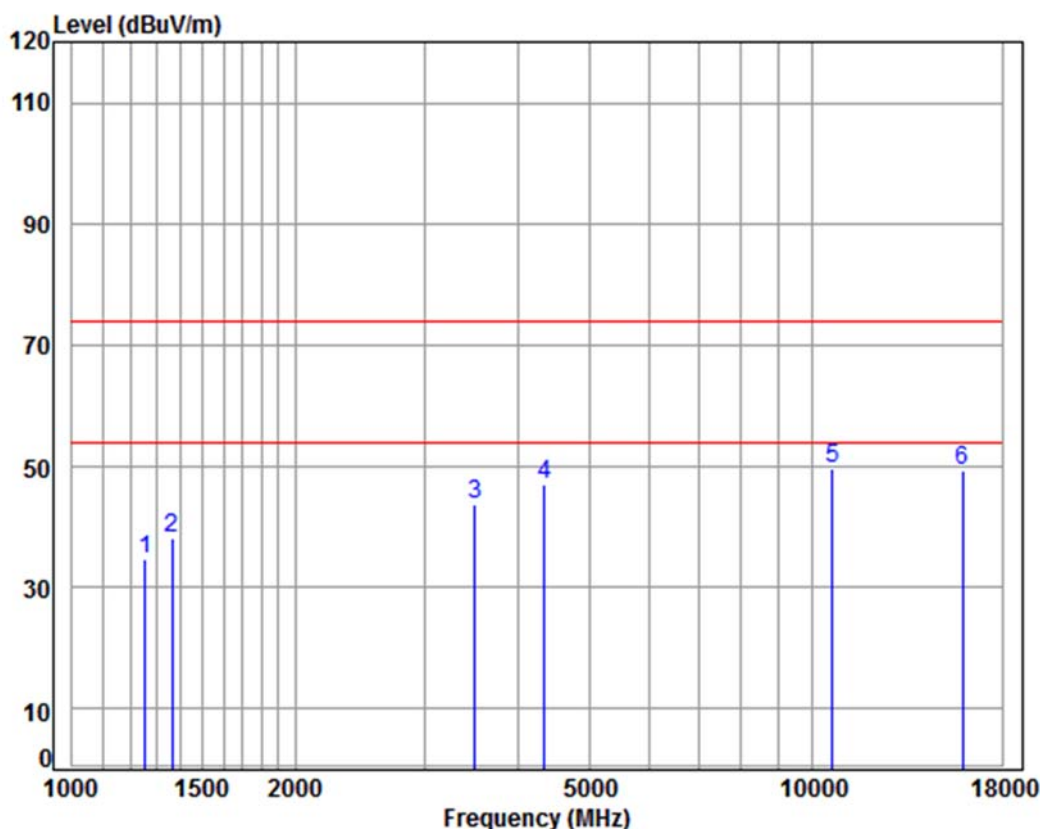

Condition: 3m HORIZONTAL

Job No : 09260RG

Mode : 5310 TX RSE

: 5G WIFI 11N40

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1256.512	4.64	24.75	38.07	43.18	34.50	74.00	-39.50	peak
2	1366.374	5.04	25.25	38.05	45.92	38.16	74.00	-35.84	peak
3	3495.691	6.46	32.19	37.95	43.21	43.91	74.00	-30.09	peak
4	4341.886	7.38	33.60	38.18	44.23	47.03	74.00	-26.97	peak
5	pp10620.000	11.37	37.25	35.22	36.45	49.85	74.00	-24.15	peak
6	15930.000	14.89	41.23	37.87	31.01	49.26	74.00	-24.74	peak




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM170800926003

Page: 212 of 411

Test mode:	802.11n(HT40)	Frequency(MHz):	5510	Peak	Vertical
------------	---------------	-----------------	------	------	----------

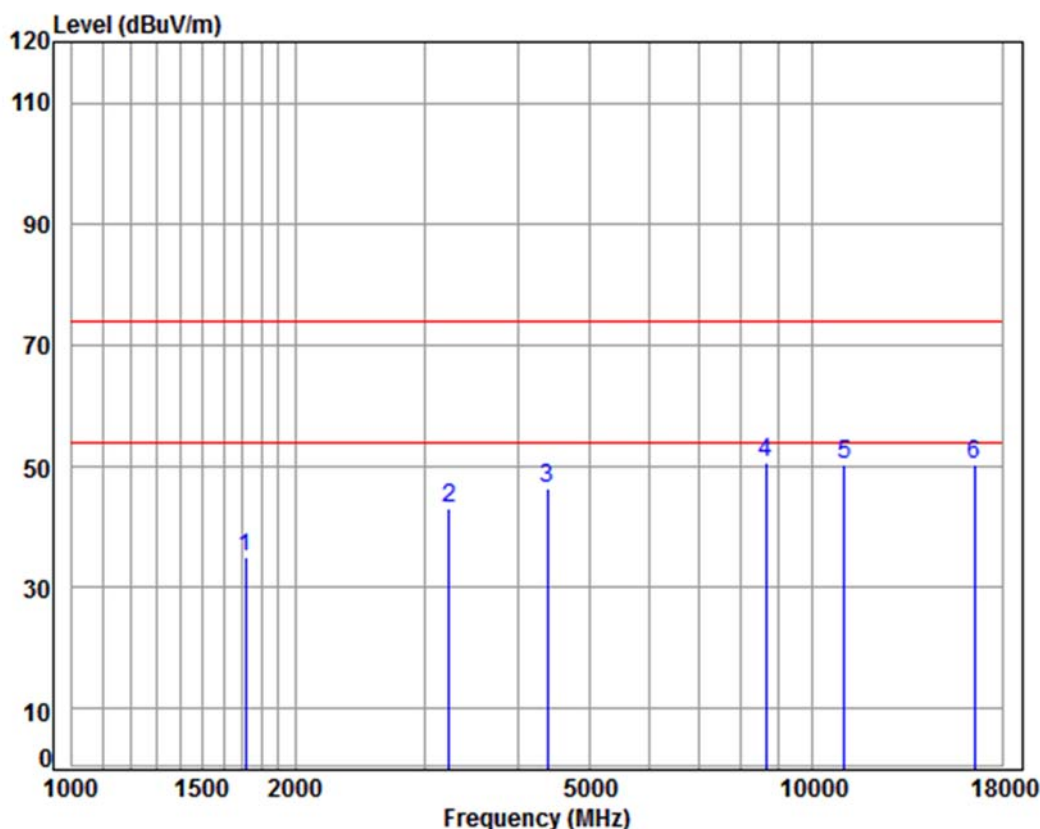

Condition: 3m VERTICAL

Job No : 09260RG

Mode : 5510 TX RSE

: 5G WIFI 11N40

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1716.864	5.21	26.74	38.02	41.04	34.97	74.00	-39.03	Peak
2	3233.260	6.21	31.74	37.93	43.05	43.07	74.00	-30.93	peak
3	4379.699	7.43	33.60	38.20	43.64	46.47	74.00	-27.53	peak
4	pp 8638.399	10.31	36.17	35.75	39.79	50.52	74.00	-23.48	Peak
5	11020.000	11.65	37.72	35.43	36.30	50.24	74.00	-23.76	peak
6	16530.000	14.63	42.71	36.99	30.14	50.49	74.00	-23.51	peak




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM170800926003

Page: 213 of 411

Test mode:	802.11n(HT40)	Frequency(MHz):	5510	Peak	Horizontal
------------	---------------	-----------------	------	------	------------

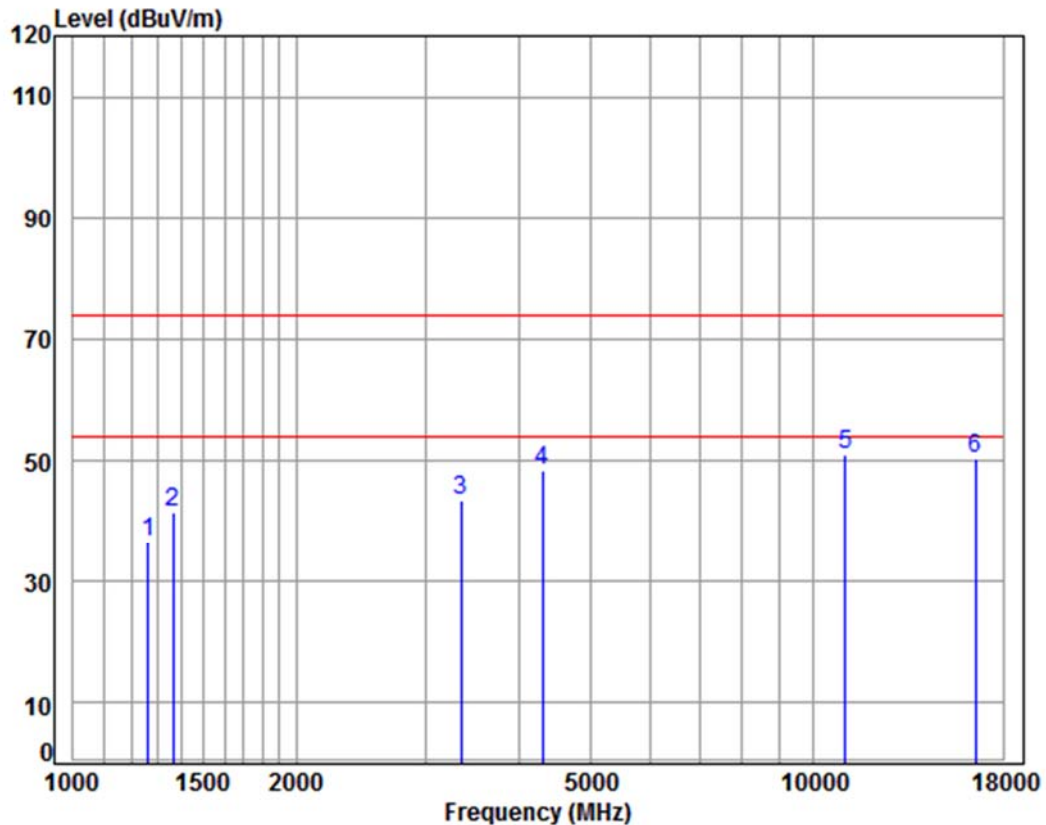

Condition: 3m HORIZONTAL

Job No : 09260RG

Mode : 5510 TX RSE

: 5G WIFI 11N40

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1263.796	4.66	24.79	38.07	45.21	36.59	74.00	-37.41	peak
2	1366.374	5.04	25.25	38.05	49.15	41.39	74.00	-32.61	peak
3	3337.710	6.31	31.92	37.94	43.19	43.48	74.00	-30.52	peak
4	4304.400	7.34	33.60	38.16	45.50	48.28	74.00	-25.72	peak
5	pp11020.000	11.65	37.72	35.43	37.19	51.13	74.00	-22.87	peak
6	16530.000	14.63	42.71	36.99	29.94	50.29	74.00	-23.71	peak




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM170800926003

Page: 214 of 411

Test mode:	802.11n(HT40)	Frequency(MHz):	5590	Peak	Vertical
------------	---------------	-----------------	------	------	----------

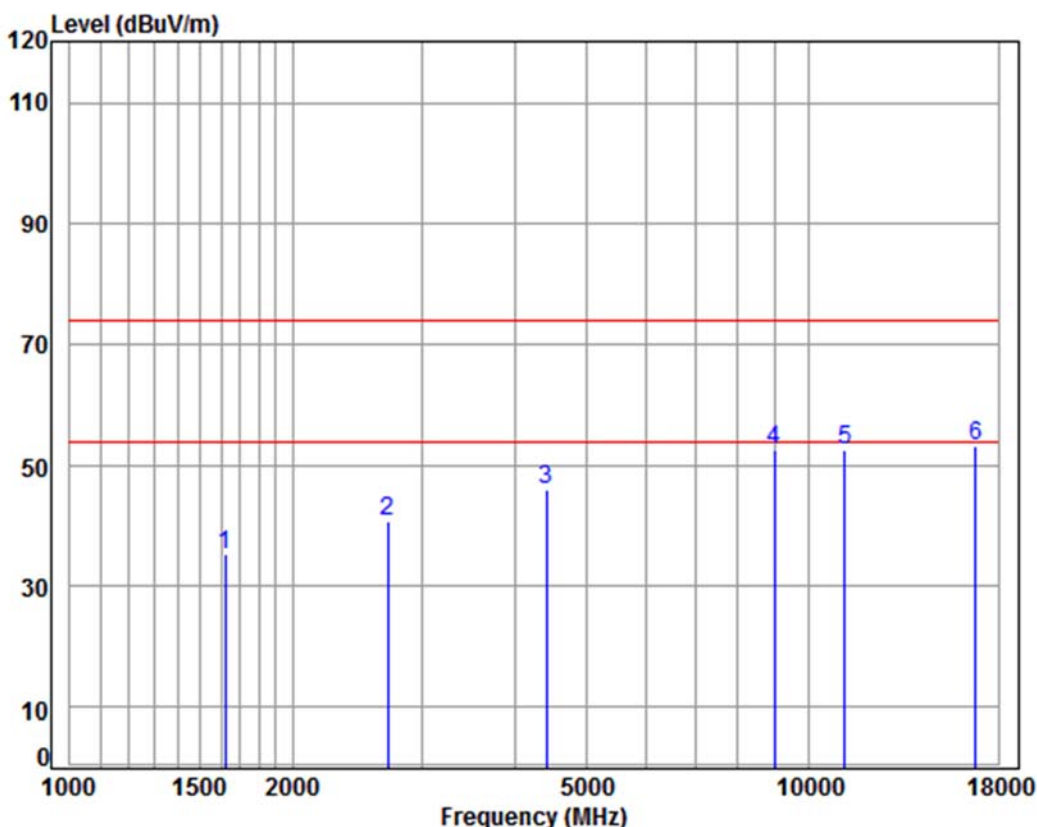

Condition: 3m VERTICAL

Job No : 09260RG

Mode : 5590 TX SE

: 5G WIFI 11N40

	Freq	Cable Loss	Ant Factor	Preamplifier Factor	Read Level	Level	Limit	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1620.431	5.32	26.34	38.03	41.60	35.23	74.00	-38.77	Peak
2	2694.998	5.77	30.18	37.93	42.91	40.93	74.00	-33.07	Peak
3	4405.090	7.46	33.60	38.22	43.23	46.07	74.00	-27.93	peak
4	8969.161	10.39	36.56	35.43	41.23	52.75	74.00	-21.25	peak
5	11180.000	11.82	37.85	35.62	38.63	52.68	74.00	-21.32	peak
6	pp16770.000	15.70	42.75	36.64	31.62	53.43	74.00	-20.57	peak




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM170800926003

Page: 215 of 411

Test mode:	802.11n(HT40)	Frequency(MHz):	5590	Peak	Horizontal
------------	---------------	-----------------	------	------	------------

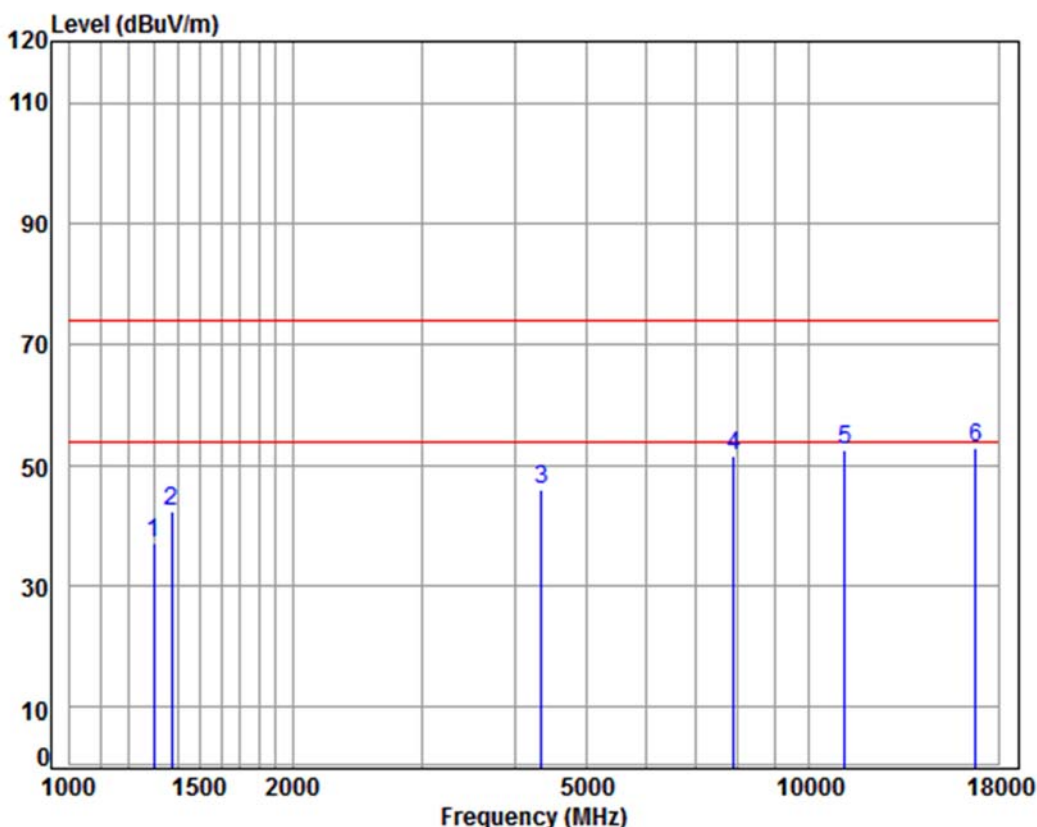

Condition: 3m HORIZONTAL

Job No : 09260RG

Mode : 5590 TX SE

: 5G WIFI 11N40

	Freq	Cable Loss	Ant Factor	Preamplifier	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1297.103	4.79	24.94	38.06	45.63	37.30	74.00	-36.70	peak
2	1374.295	5.06	25.28	38.05	50.20	42.49	74.00	-31.51	peak
3	4341.886	7.38	33.60	38.18	43.16	45.96	74.00	-28.04	peak
4	7898.049	9.96	36.54	36.49	41.60	51.61	74.00	-22.39	peak
5	11180.000	11.82	37.85	35.62	38.58	52.63	74.00	-21.37	peak
6	pp16770.000	15.70	42.75	36.64	31.31	53.12	74.00	-20.88	peak




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM170800926003

Page: 216 of 411

Test mode:	802.11n(HT40)	Frequency(MHz):	5670	Peak	Vertical
------------	---------------	-----------------	------	------	----------

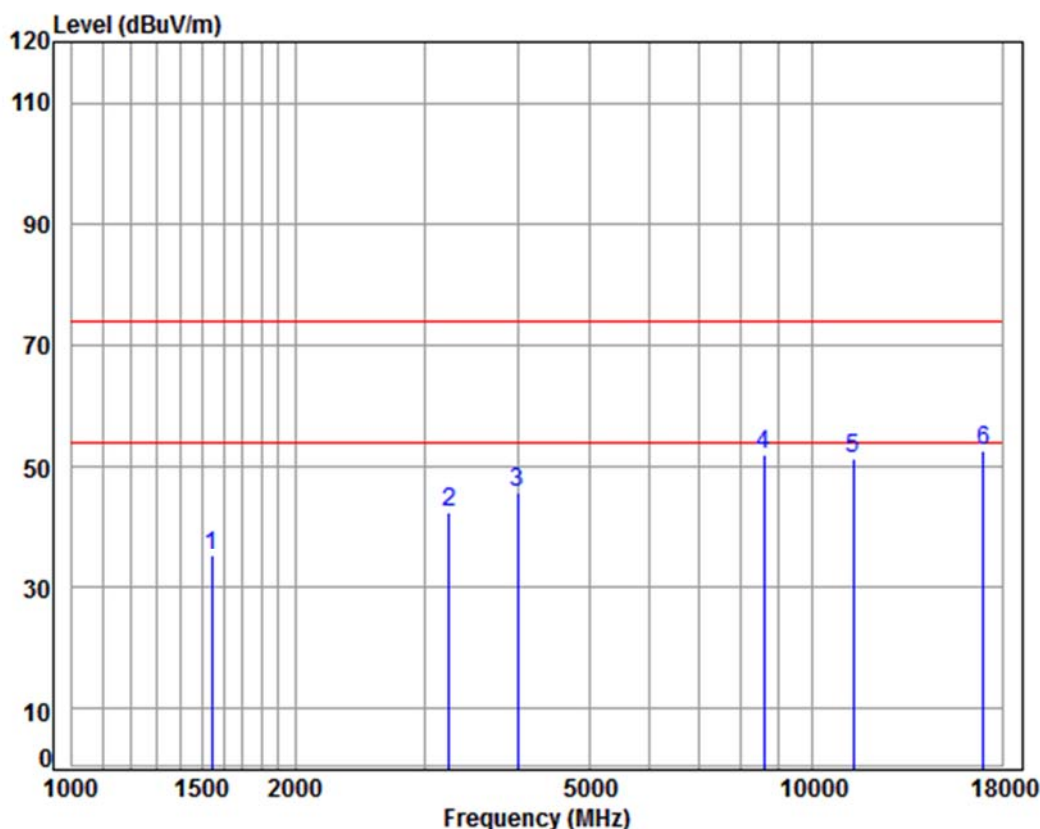

Condition: 3m VERTICAL

Job No : 09260RG

Mode : 5670 TX RSE

: 5G WIFI 11N40

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1542.733	5.42	26.00	38.04	42.01	35.39	74.00	-38.61	Peak
2	3233.260	6.21	31.74	37.93	42.60	42.62	74.00	-31.38	peak
3	3992.781	6.97	33.58	38.00	43.18	45.73	74.00	-28.27	peak
4	8588.607	10.29	36.11	35.80	41.26	51.86	74.00	-22.14	Peak
5	11340.000	11.98	37.97	35.82	37.14	51.27	74.00	-22.73	peak
6	pp17010.000	16.69	42.81	36.29	29.27	52.48	74.00	-21.52	peak




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM170800926003

Page: 217 of 411

Test mode:	802.11n(HT40)	Frequency(MHz):	5670	Peak	Horizontal
------------	---------------	-----------------	------	------	------------

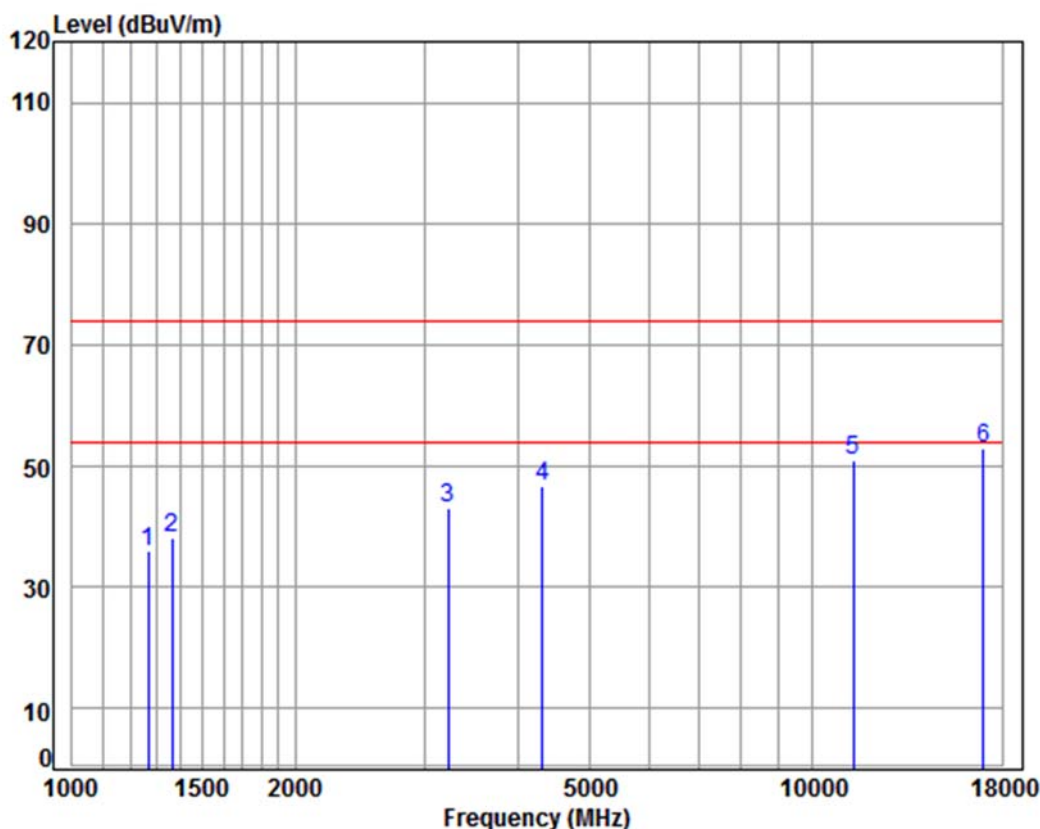

Condition: 3m HORIZONTAL

Job No : 09260RG

Mode : 5670 TX RSE

: 5G WIFI 11N40

	Freq	Cable Loss	Ant Factor	Preamplifier Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1267.454	4.68	24.80	38.07	44.43	35.84	74.00	-38.16	peak
2	1366.374	5.04	25.25	38.05	45.93	38.17	74.00	-35.83	peak
3	3214.623	6.20	31.70	37.92	43.25	43.23	74.00	-30.77	peak
4	4316.859	7.36	33.60	38.17	43.87	46.66	74.00	-27.34	peak
5	11340.000	11.98	37.97	35.82	36.94	51.07	74.00	-22.93	peak
6	pp17010.000	16.69	42.81	36.29	29.75	52.96	74.00	-21.04	peak




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM170800926003

Page: 218 of 411

Test mode:	802.11n(HT40)	Frequency(MHz):	5755	Peak	Vertical
------------	---------------	-----------------	------	------	----------

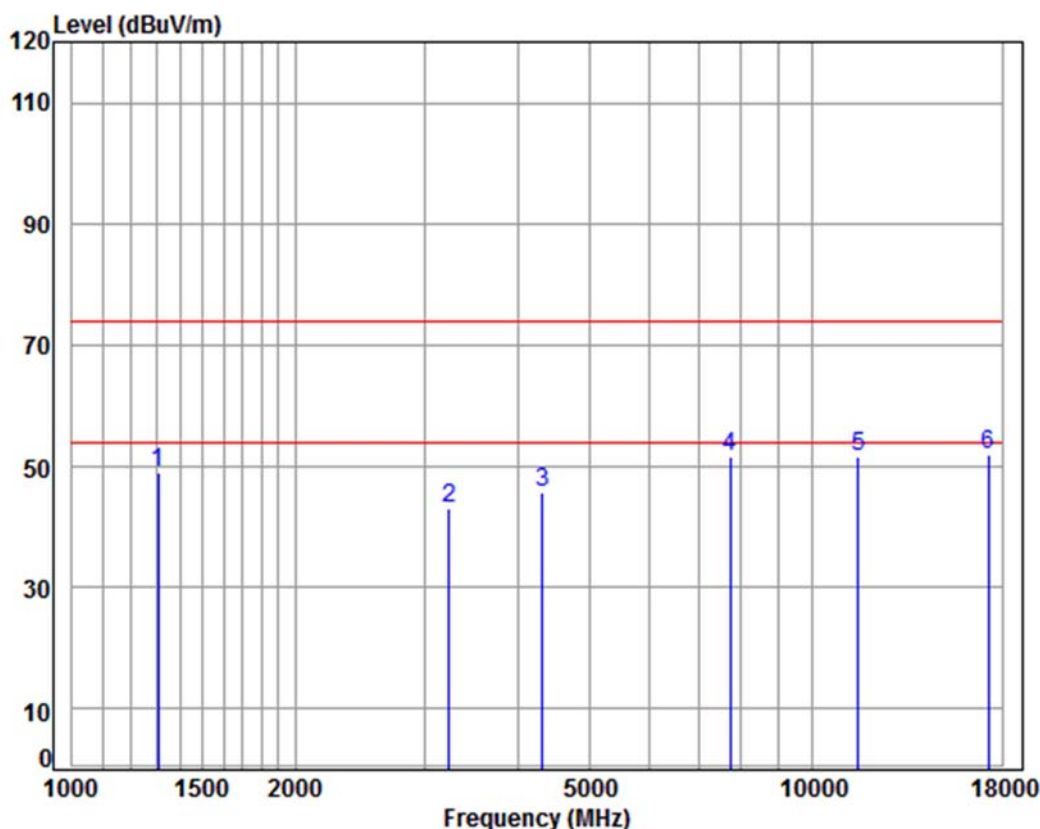

Condition: 3m VERTICAL

Job No : 09260RG

Mode : 5755 TX RSE

: 5G WIFI 11N40

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1308.399	4.83	24.99	38.06	57.36	49.12	74.00	-24.88	Peak
2	3233.260	6.21	31.74	37.93	43.16	43.18	74.00	-30.82	peak
3	4316.859	7.36	33.60	38.17	43.04	45.83	74.00	-28.17	peak
4	7739.857	9.98	36.45	36.62	41.90	51.71	74.00	-22.29	Peak
5	11510.000	12.14	38.11	36.03	37.43	51.65	74.00	-22.35	peak
6	pp17265.000	16.12	43.12	36.16	28.89	51.97	74.00	-22.03	peak




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM170800926003

Page: 219 of 411

Test mode:	802.11n(HT40)	Frequency(MHz):	5755	Peak	Horizontal
------------	---------------	-----------------	------	------	------------

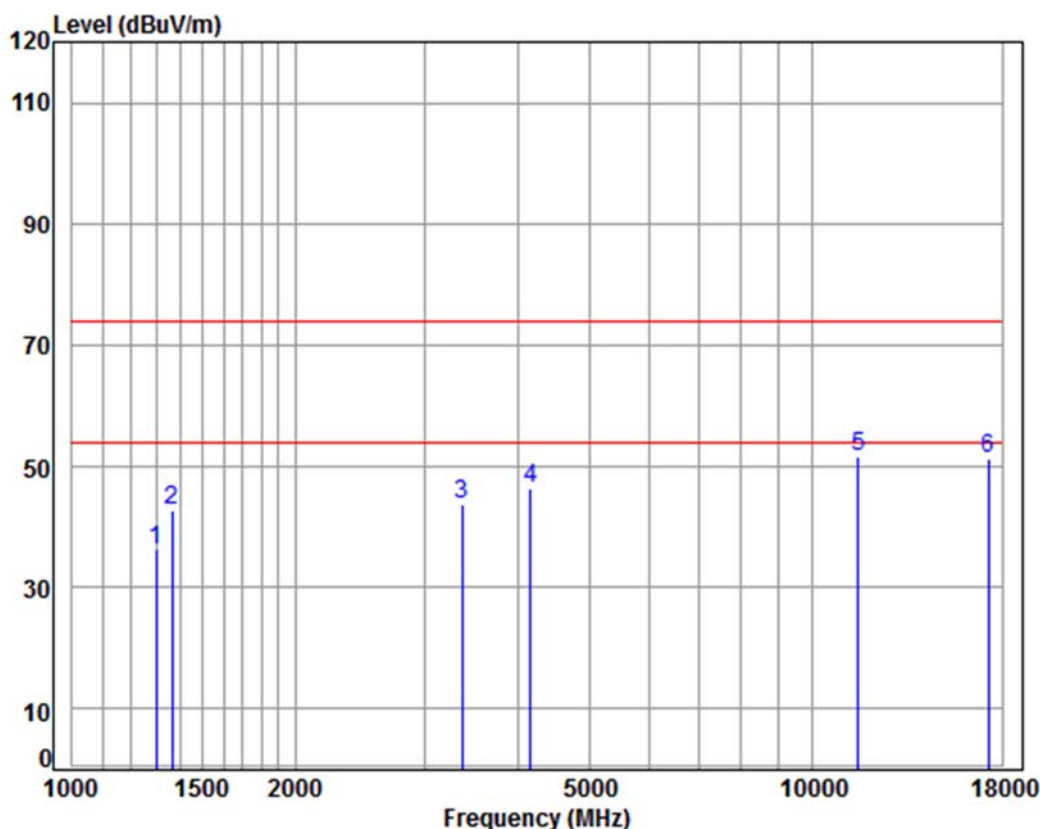

Condition: 3m HORIZONTAL

Job No : 09260RG

Mode : 5755 TX RSE

: 5G WIFI 11N40

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1297.103	4.79	24.94	38.06	44.62	36.29	74.00	-37.71	peak
2	1366.374	5.04	25.25	38.05	50.59	42.83	74.00	-31.17	peak
3	3357.061	6.33	31.96	37.94	43.43	43.78	74.00	-30.22	peak
4	4157.664	7.17	33.60	38.09	43.83	46.51	74.00	-27.49	peak
5	pp11510.000	12.14	38.11	36.03	37.39	51.61	74.00	-22.39	peak
6	17265.000	16.12	43.12	36.16	28.35	51.43	74.00	-22.57	peak




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM170800926003

Page: 220 of 411

Test mode:	802.11n(HT40)	Frequency(MHz):	5795	Peak	Vertical
------------	---------------	-----------------	------	------	----------

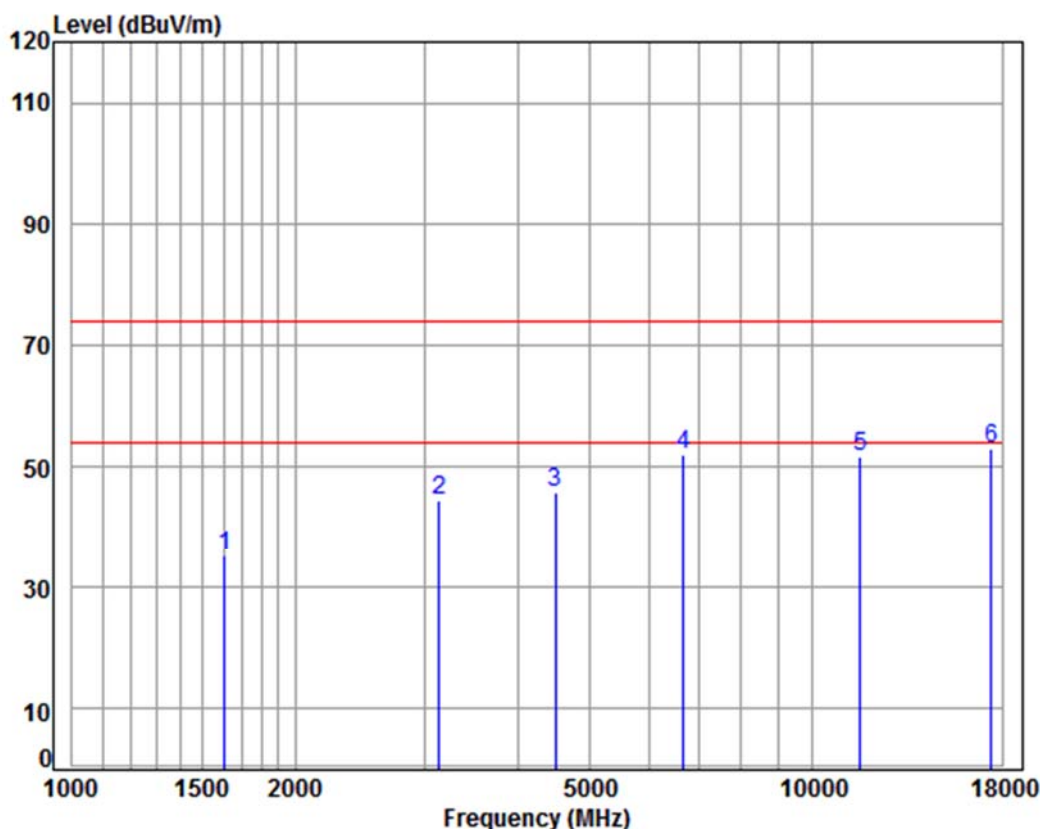

Condition: 3m HORIZONTAL

Job No : 09260RG

Mode : 5795 TX RSE

: 5G WIFI 11N40

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1606.441	5.34	26.28	38.03	41.74	35.33	74.00	-38.67	Peak
2	3132.079	6.11	31.55	37.91	44.56	44.31	74.00	-29.69	peak
3	4495.125	7.55	33.60	38.26	42.74	45.63	74.00	-28.37	peak
4	6679.040	11.02	35.61	37.60	42.83	51.86	74.00	-22.14	Peak
5	11590.000	12.17	38.19	36.12	37.26	51.50	74.00	-22.50	peak
6	pp17385.000	15.85	43.26	36.10	29.96	52.97	74.00	-21.03	peak




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM170800926003

Page: 221 of 411

Test mode:	802.11n(HT40)	Frequency(MHz):	5795	Peak	Horizontal
------------	---------------	-----------------	------	------	------------

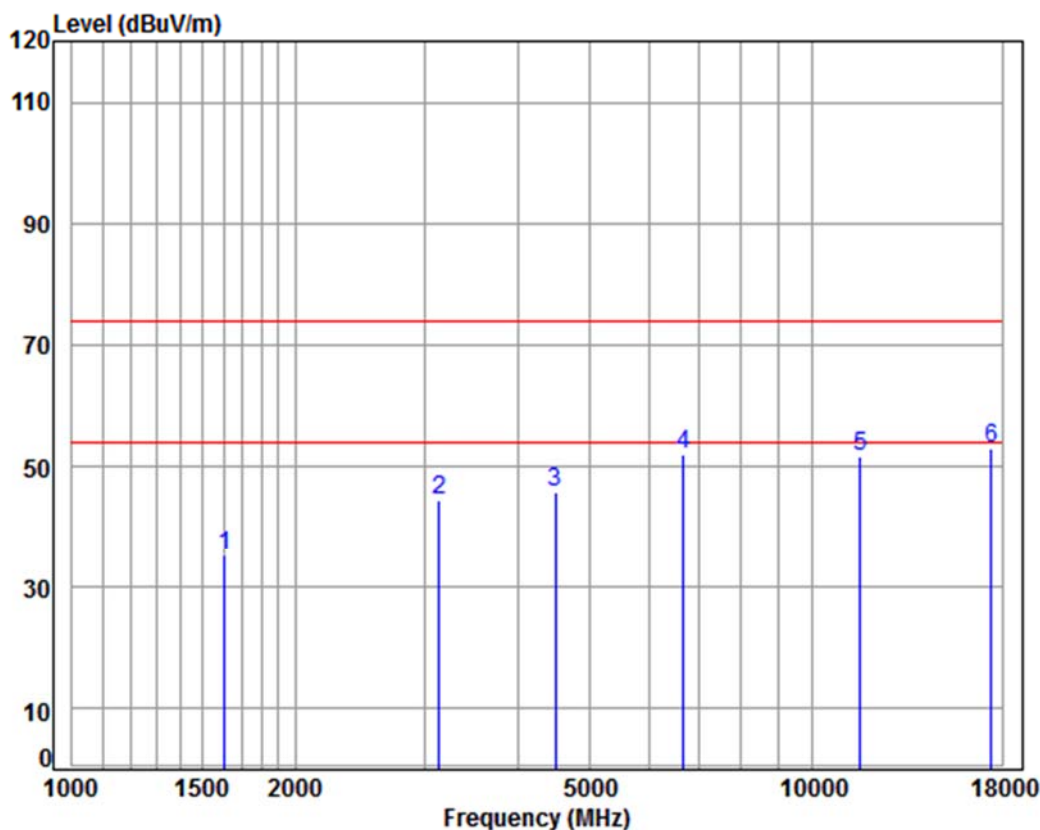

Condition: 3m HORIZONTAL

Job No : 09260RG

Mode : 5795 TX RSE

: 5G WIFI 11N40

	Freq	Cable Loss	Ant Factor	Preamplifier Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1606.441	5.34	26.28	38.03	41.74	35.33	74.00	-38.67	Peak
2	3132.079	6.11	31.55	37.91	44.56	44.31	74.00	-29.69	peak
3	4495.125	7.55	33.60	38.26	42.74	45.63	74.00	-28.37	peak
4	6679.040	11.02	35.61	37.60	42.83	51.86	74.00	-22.14	Peak
5	11590.000	12.17	38.19	36.12	37.26	51.50	74.00	-22.50	peak
6	pp17385.000	15.85	43.26	36.10	29.96	52.97	74.00	-21.03	peak




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM170800926003

Page: 222 of 411

Test mode:	802.11ac(HT40)	Frequency(MHz):	5190	Peak	Vertical
------------	----------------	-----------------	------	------	----------

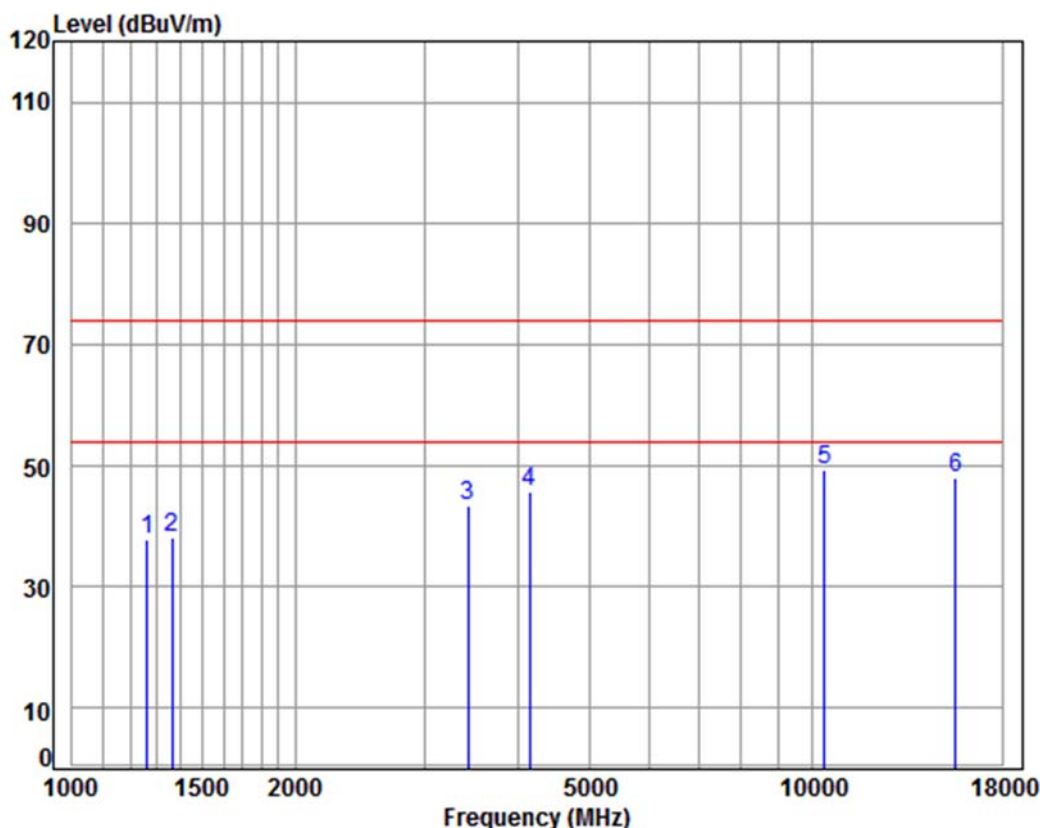

Condition: 3m VERTICAL

Job No : 09260RG

Mode : 5190 TX RSE

: 5G WIFI 11AC40

	Freq	Cable Loss	Ant Factor	Preamplifier Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1263.796	4.66	24.79	38.07	46.66	38.04	74.00	-35.96	peak
2	1366.374	5.04	25.25	38.05	45.99	38.23	74.00	-35.77	peak
3	3425.675	6.39	32.07	37.95	43.04	43.55	74.00	-30.45	peak
4	4145.664	7.16	33.60	38.08	43.21	45.89	74.00	-28.11	peak
5	pp10380.000	11.21	37.22	35.10	36.00	49.33	74.00	-24.67	peak
6	15570.000	14.35	41.37	38.26	30.64	48.10	74.00	-25.90	peak




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM170800926003

Page: 223 of 411

Test mode:	802.11ac(HT40)	Frequency(MHz):	5190	Peak	Horizontal
------------	----------------	-----------------	------	------	------------

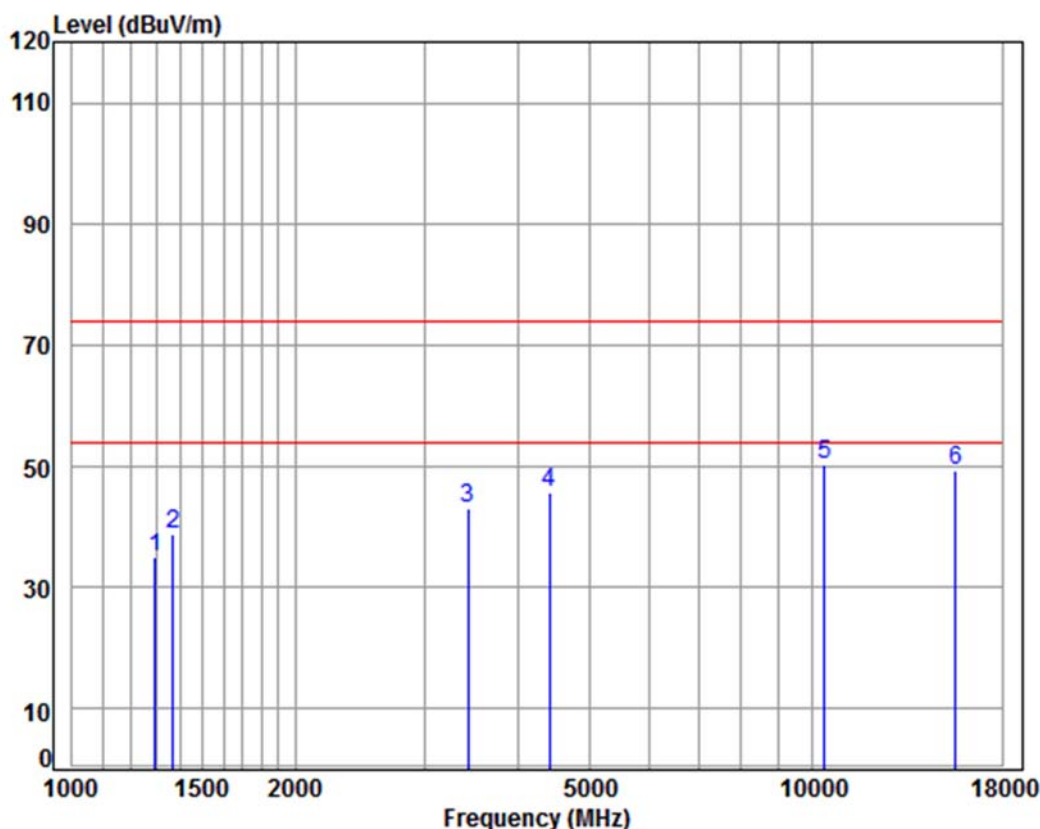

Condition: 3m HORIZONTAL

Job No : 09260RG

Mode : 5190 TX RSE

: 5G WIFI 11AC40

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit	Over	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1293.359	4.77	24.92	38.06	43.49	35.12	74.00	-38.88	peak
2	1370.328	5.05	25.26	38.05	46.59	38.85	74.00	-35.15	peak
3	3425.675	6.39	32.07	37.95	42.71	43.22	74.00	-30.78	peak
4	4405.090	7.46	33.60	38.22	42.87	45.71	74.00	-28.29	peak
5	pp10380.000	11.21	37.22	35.10	37.11	50.44	74.00	-23.56	peak
6	15570.000	14.35	41.37	38.26	31.92	49.38	74.00	-24.62	peak




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM170800926003

Page: 224 of 411

Test mode:	802.11ac(HT40)	Frequency(MHz):	5230	Peak	Vertical
------------	----------------	-----------------	------	------	----------

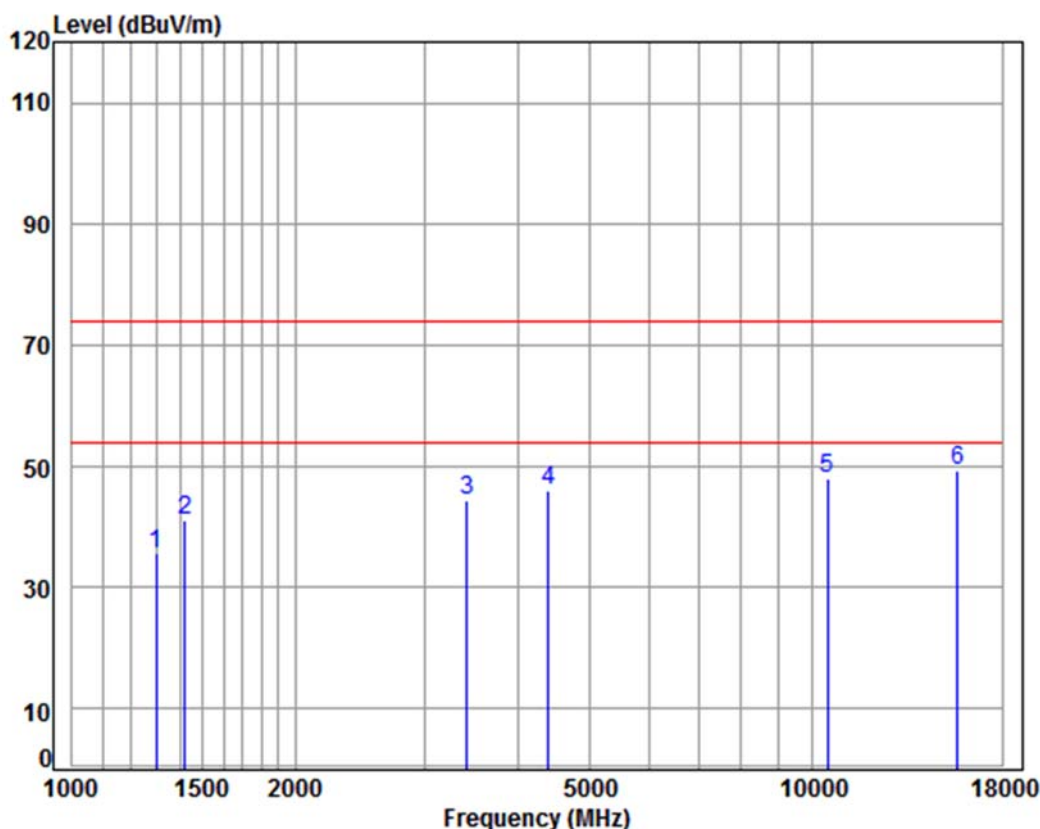

Condition: 3m VERTICAL

Job No : 09260RG

Mode : 5230 TX RSE

: 5G WIFI 11AC40

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1297.103	4.79	24.94	38.06	43.93	35.60	74.00	-38.40	peak
2	1418.692	5.21	25.47	38.05	48.59	41.22	74.00	-32.78	peak
3	3415.787	6.38	32.06	37.95	44.00	44.49	74.00	-29.51	peak
4	4392.376	7.44	33.60	38.21	43.38	46.21	74.00	-27.79	peak
5	10460.000	11.26	37.14	35.14	34.91	48.17	74.00	-25.83	peak
6	pp15690.000	14.53	41.32	38.13	31.58	49.30	74.00	-24.70	peak




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM170800926003

Page: 225 of 411

Test mode:	802.11ac(HT40)	Frequency(MHz):	5230	Peak	Horizontal
------------	----------------	-----------------	------	------	------------

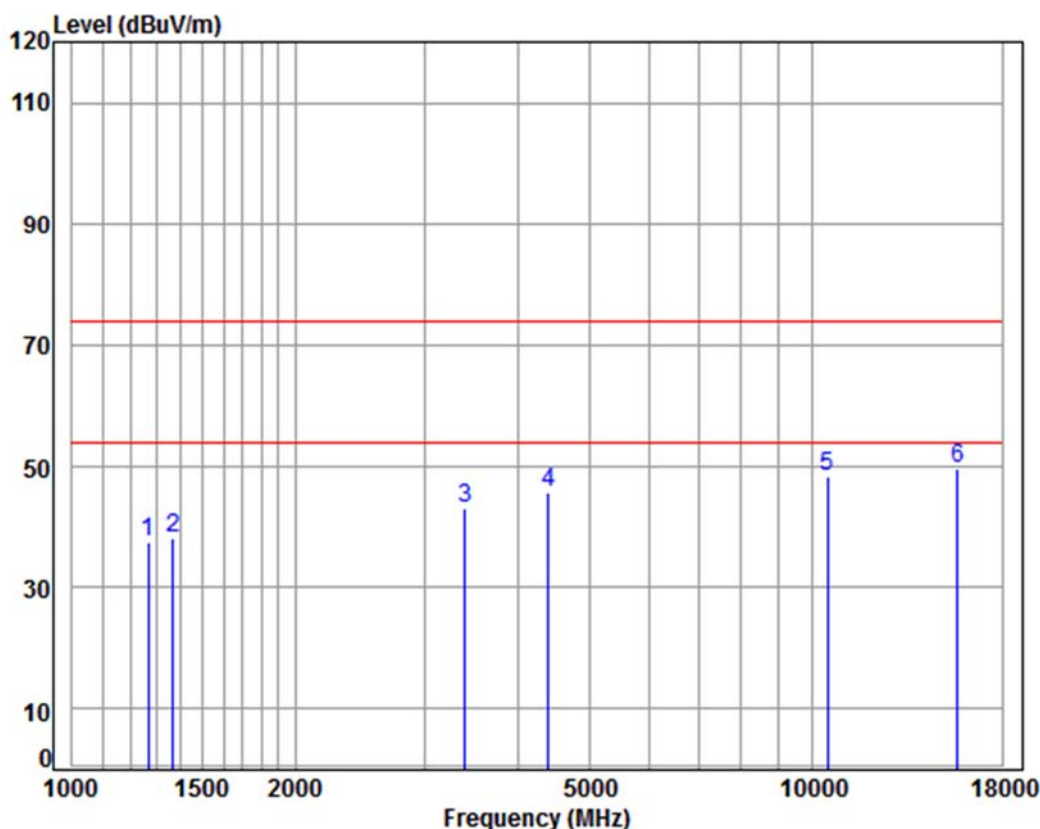

Condition: 3m HORIZONTAL

Job No : 09260RG

Mode : 5230 TX RSE

: 5G WIFI 11AC40

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1267.454	4.68	24.80	38.07	46.17	37.58	74.00	-36.42	peak
2	1370.328	5.05	25.26	38.05	46.11	38.37	74.00	-35.63	peak
3	3396.098	6.37	32.02	37.94	42.56	43.01	74.00	-30.99	peak
4	4392.376	7.44	33.60	38.21	42.87	45.70	74.00	-28.30	peak
5	10460.000	11.26	37.14	35.14	35.15	48.41	74.00	-25.59	peak
6	pp15690.000	14.53	41.32	38.13	31.94	49.66	74.00	-24.34	peak




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM170800926003

Page: 226 of 411

Test mode:	802.11ac(HT40)	Frequency(MHz):	5270	Peak	Vertical
------------	----------------	-----------------	------	------	----------

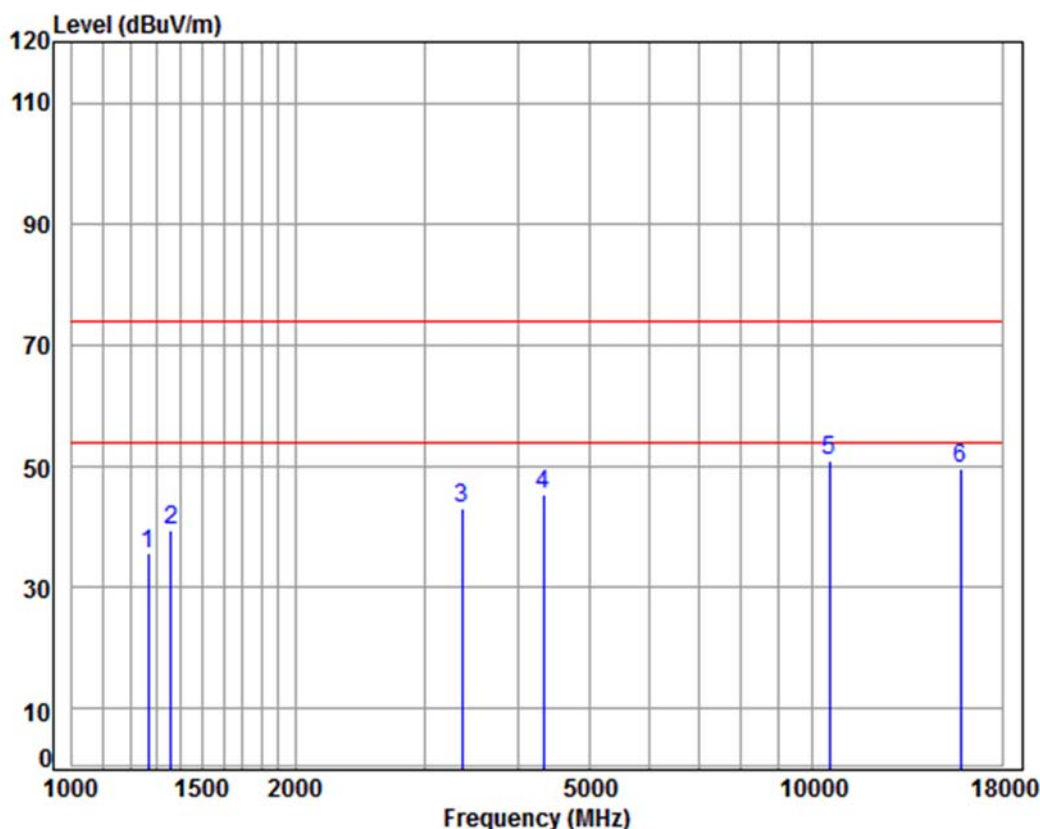

Condition: 3m VERTICAL

Job No : 09260RG

Mode : 5270 TX RSE

: 5G WIFI 11AC40

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1267.454	4.68	24.80	38.07	44.33	35.74	74.00	-38.26	peak
2	1362.430	5.02	25.23	38.06	47.46	39.65	74.00	-34.35	peak
3	3357.061	6.33	31.96	37.94	42.70	43.05	74.00	-30.95	peak
4	4329.354	7.37	33.60	38.18	42.71	45.50	74.00	-28.50	peak
5	pp10540.000	11.32	37.15	35.18	37.88	51.17	74.00	-22.83	peak
6	15810.000	14.71	41.28	38.00	31.79	49.78	74.00	-24.22	peak




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM170800926003

Page: 227 of 411

Test mode:	802.11ac(HT40)	Frequency(MHz):	5270	Peak	Horizontal
------------	----------------	-----------------	------	------	------------

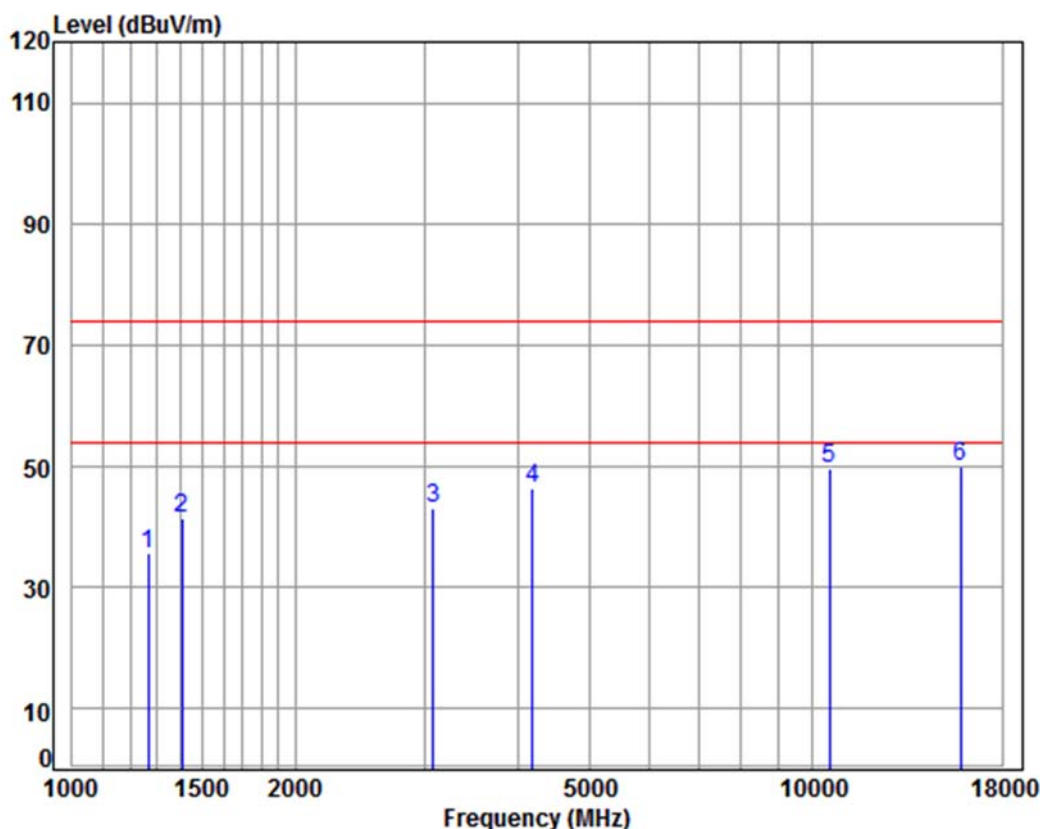

Condition: 3m HORIZONTAL

Job No : 09260RG

Mode : 5270 TX RSE

: 5G WIFI 11AC40

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1267.454	4.68	24.80	38.07	44.24	35.65	74.00	-38.35	peak
2	1406.443	5.17	25.42	38.05	49.13	41.67	74.00	-32.33	peak
3	3069.345	6.05	31.43	37.91	43.75	43.32	74.00	-30.68	peak
4	4181.768	7.20	33.60	38.10	43.73	46.43	74.00	-27.57	peak
5	10540.000	11.32	37.15	35.18	36.35	49.64	74.00	-24.36	peak
6	15810.000	14.71	41.28	38.00	31.96	49.95	74.00	-24.05	peak




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM170800926003

Page: 228 of 411

Test mode:	802.11ac(HT40)	Frequency(MHz):	5310	Peak	Vertical
------------	----------------	-----------------	------	------	----------

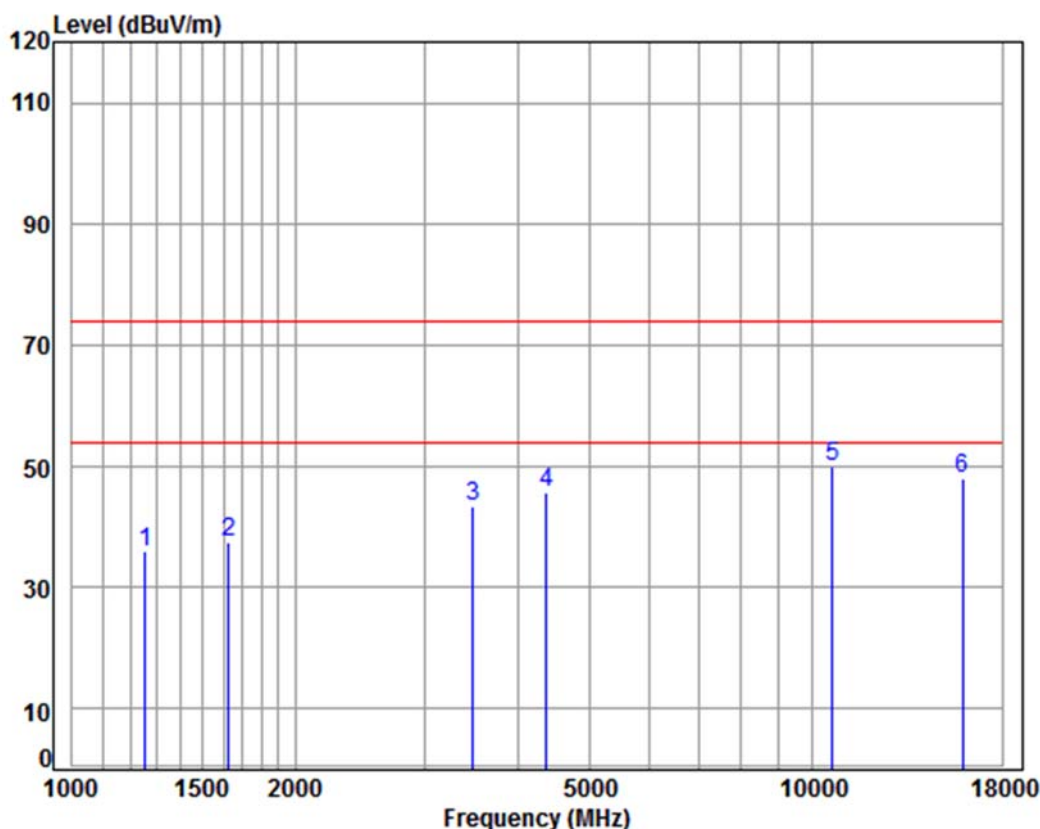

Condition: 3m VERTICAL

Job No : 09260RG

Mode : 5310 TX RSE

: 5G WIFI 11AC40

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1256.512	4.64	24.75	38.07	44.50	35.82	74.00	-38.18	peak
2	1625.121	5.32	26.36	38.03	43.79	37.44	74.00	-36.56	peak
3	3475.541	6.44	32.16	37.95	42.90	43.55	74.00	-30.45	peak
4	4367.058	7.41	33.60	38.20	42.93	45.74	74.00	-28.26	peak
5	pp10620.000	11.37	37.25	35.22	36.47	49.87	74.00	-24.13	peak
6	15930.000	14.89	41.23	37.87	29.86	48.11	74.00	-25.89	peak




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM170800926003

Page: 229 of 411

Test mode:	802.11ac(HT40)	Frequency(MHz):	5310	Peak	Horizontal
------------	----------------	-----------------	------	------	------------

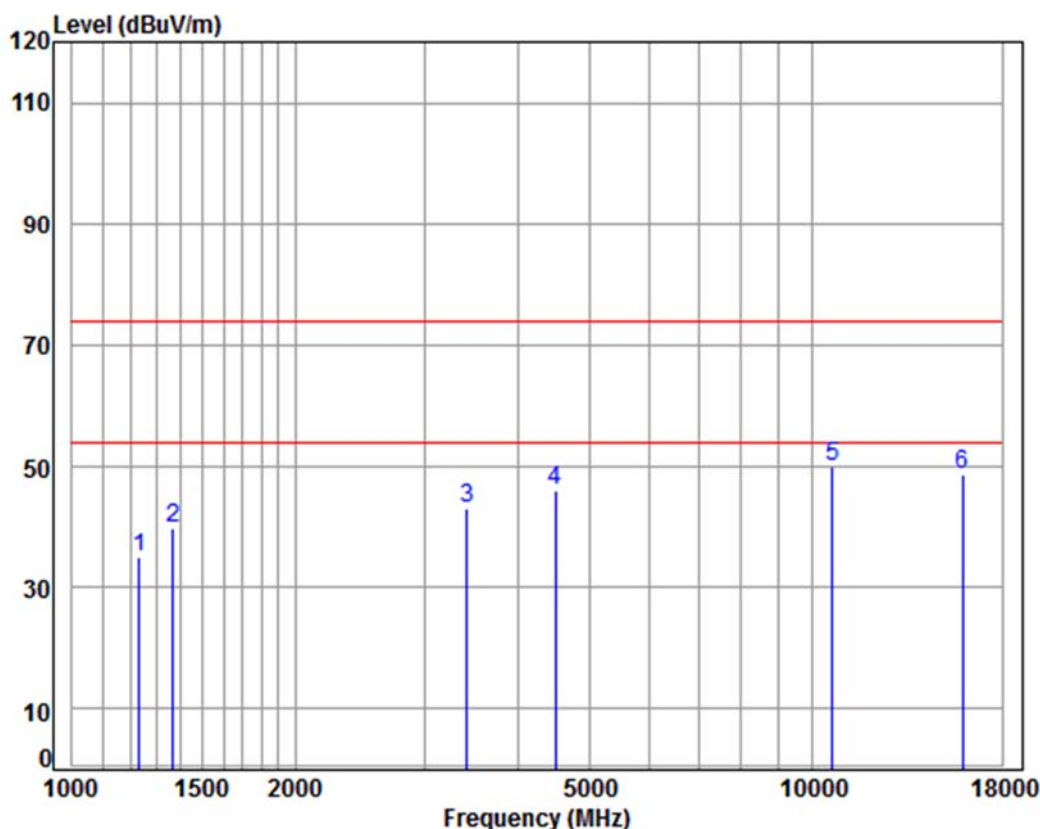

Condition: 3m HORIZONTAL

Job No : 09260RG

Mode : 5310 TX RSE

: 5G WIFI 11AC40

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1231.345	4.54	24.63	38.07	44.04	35.14	74.00	-38.86	peak
2	1370.328	5.05	25.26	38.05	47.61	39.87	74.00	-34.13	peak
3	3415.787	6.38	32.06	37.95	42.79	43.28	74.00	-30.72	peak
4	4495.125	7.55	33.60	38.26	43.13	46.02	74.00	-27.98	peak
5	pp10620.000	11.37	37.25	35.22	36.59	49.99	74.00	-24.01	peak
6	15930.000	14.89	41.23	37.87	30.55	48.80	74.00	-25.20	peak




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM170800926003

Page: 230 of 411

Test mode:	802.11ac(HT40)	Frequency(MHz):	5510	Peak	Vertical
------------	----------------	-----------------	------	------	----------

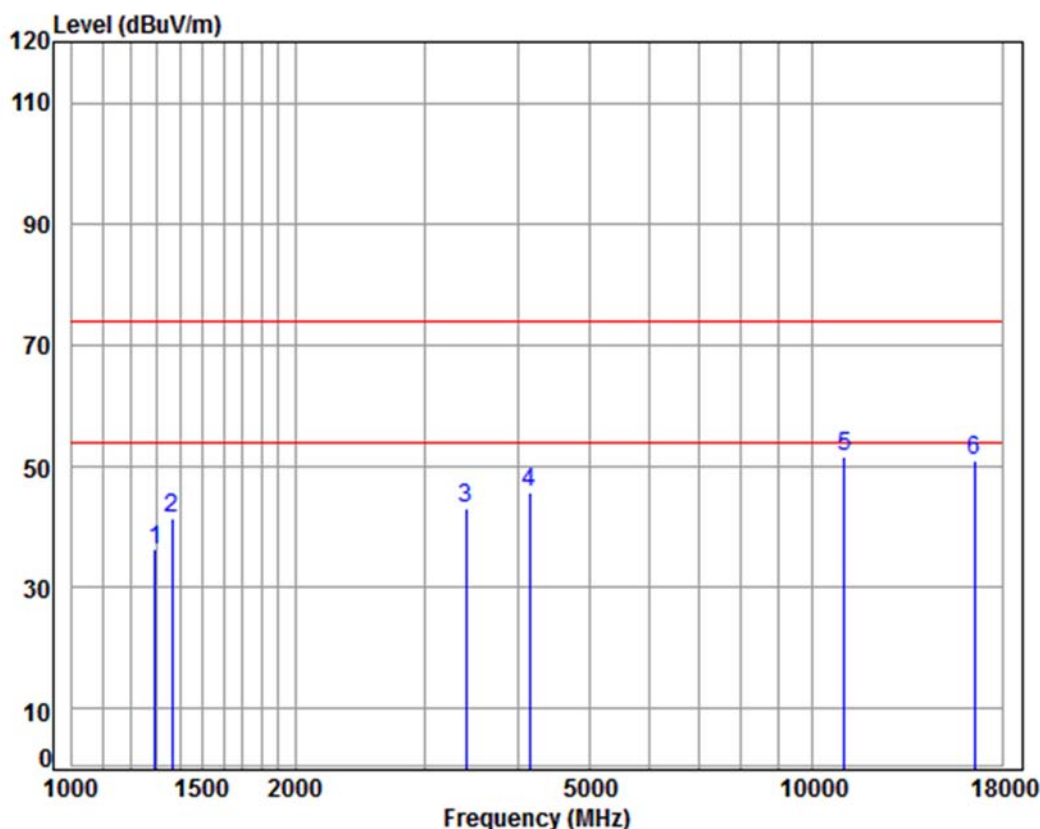

Condition: 3m VERTICAL

Job No : 09260RG

Mode : 5510 TX RSE

: 5G WIFI 11AC40

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1293.359	4.77	24.92	38.06	44.74	36.37	74.00	-37.63	peak
2	1366.374	5.04	25.25	38.05	49.20	41.44	74.00	-32.56	peak
3	3405.929	6.38	32.04	37.94	42.69	43.17	74.00	-30.83	peak
4	4145.664	7.16	33.60	38.08	43.15	45.83	74.00	-28.17	peak
5	pp11020.000	11.65	37.72	35.43	37.69	51.63	74.00	-22.37	peak
6	16530.000	14.63	42.71	36.99	30.53	50.88	74.00	-23.12	peak




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM170800926003

Page: 231 of 411

Test mode:	802.11ac(HT40)	Frequency(MHz):	5510	Peak	Horizontal
------------	----------------	-----------------	------	------	------------

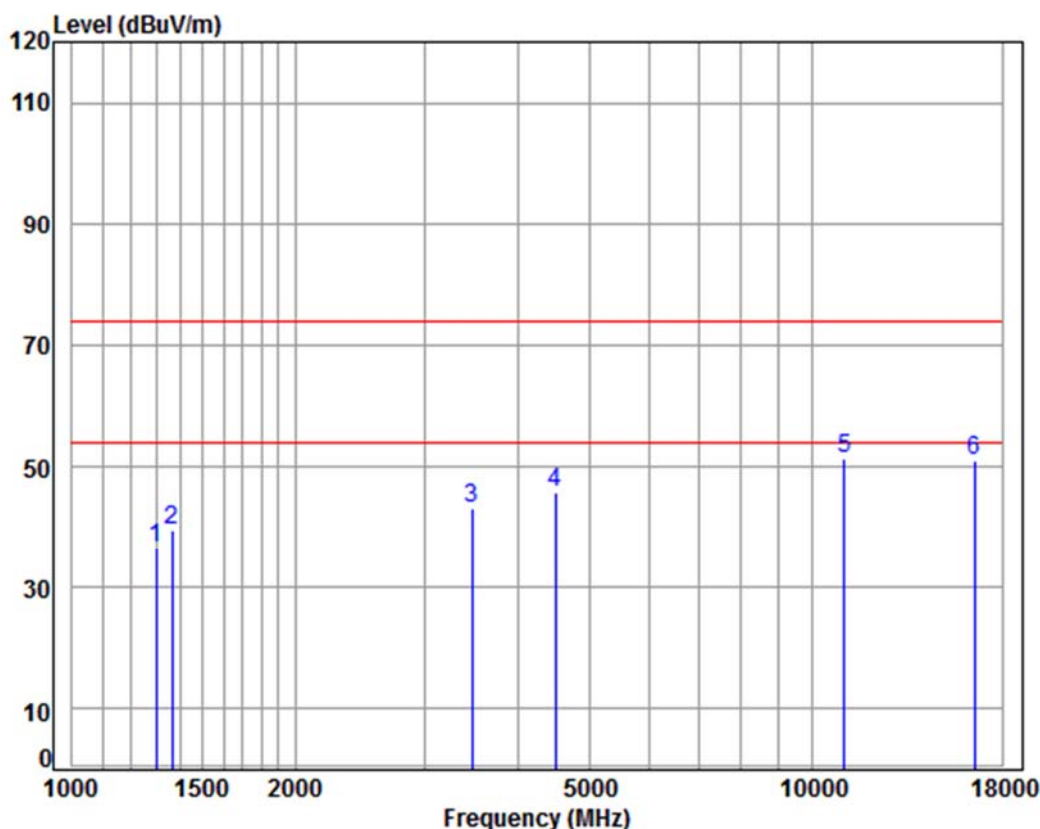

Condition: 3m HORIZONTAL

Job No : 09260RG

Mode : 5510 TX RSE

: 5G WIFI 11AC40

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1300.858	4.80	24.96	38.06	45.03	36.73	74.00	-37.27	peak
2	1366.374	5.04	25.25	38.05	47.30	39.54	74.00	-34.46	peak
3	3465.510	6.43	32.14	37.95	42.70	43.32	74.00	-30.68	peak
4	4495.125	7.55	33.60	38.26	42.92	45.81	74.00	-28.19	peak
5	pp11020.000	11.65	37.72	35.43	37.45	51.39	74.00	-22.61	peak
6	16530.000	14.63	42.71	36.99	30.78	51.13	74.00	-22.87	peak




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM170800926003

Page: 232 of 411

Test mode:	802.11ac(HT40)	Frequency(MHz):	5590	Peak	Vertical
------------	----------------	-----------------	------	------	----------

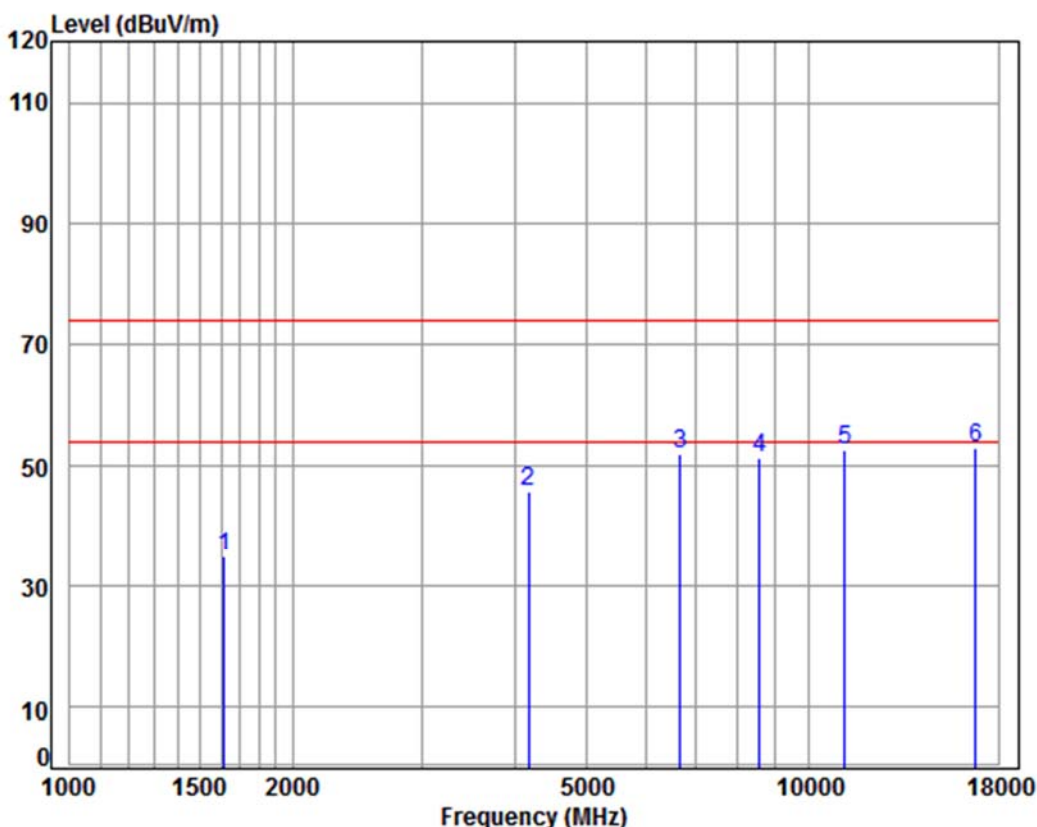

Condition: 3m VERTICAL

Job No : 09260RG

Mode : 5590 TX SE

: 5G WIFI 11AC40

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1615.754	5.33	26.32	38.03	41.49	35.11	74.00	-38.89	Peak
2	4169.698	7.18	33.60	38.09	43.11	45.80	74.00	-28.20	peak
3	6679.040	11.02	35.61	37.60	43.03	52.06	74.00	-21.94	Peak
4	8563.818	10.29	36.08	35.82	40.75	51.30	74.00	-22.70	peak
5	11180.000	11.82	37.85	35.62	38.59	52.64	74.00	-21.36	peak
6	pp16770.000	15.70	42.75	36.64	31.24	53.05	74.00	-20.95	peak




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM170800926003

Page: 233 of 411

Test mode:	802.11ac(HT40)	Frequency(MHz):	5590	Peak	Horizontal
------------	----------------	-----------------	------	------	------------

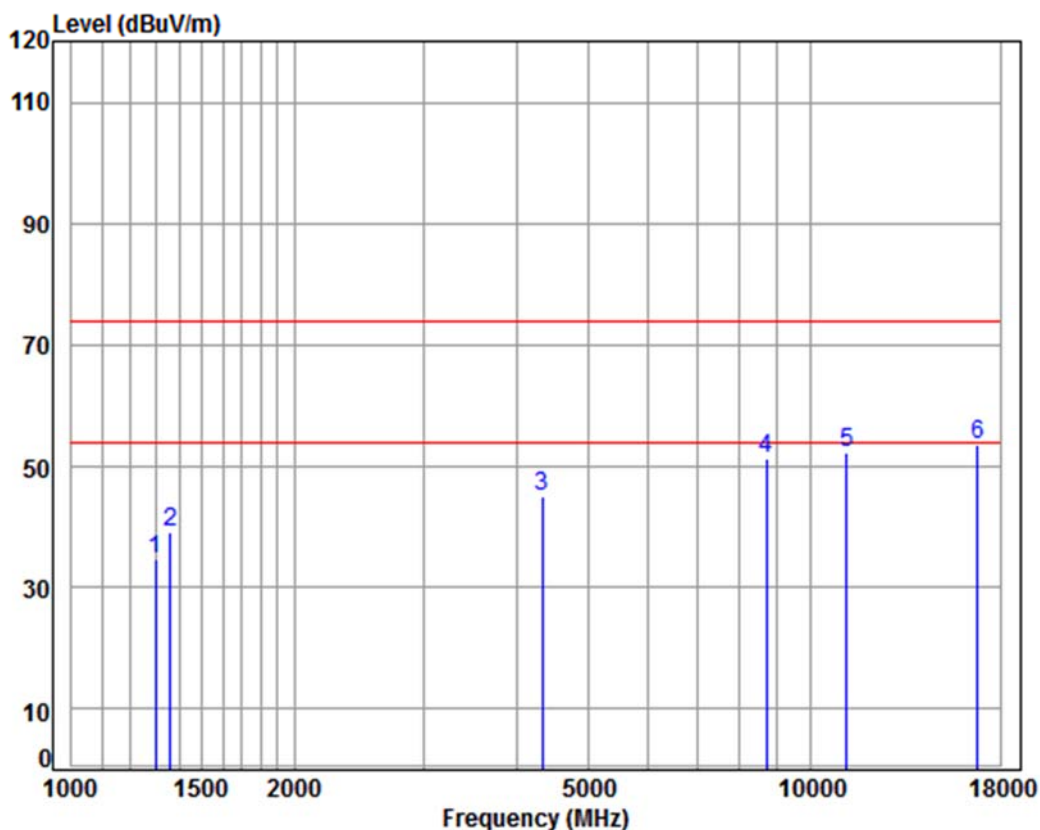

Condition: 3m HORIZONTAL

Job No : 09260RG

Mode : 5590 TX SE

: 5G WIFI 11AC40

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1297.103	4.79	24.94	38.06	43.06	34.73	74.00	-39.27	peak
2	1362.430	5.02	25.23	38.06	46.99	39.18	74.00	-34.82	peak
3	4329.354	7.37	33.60	38.18	42.48	45.27	74.00	-28.73	peak
4	8688.480	10.32	36.23	35.70	40.58	51.43	74.00	-22.57	peak
5	11180.000	11.82	37.85	35.62	38.29	52.34	74.00	-21.66	peak
6	pp16770.000	15.70	42.75	36.64	31.70	53.51	74.00	-20.49	peak




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM170800926003

Page: 234 of 411

Test mode:	802.11ac(HT40)	Frequency(MHz):	5670	Peak	Vertical
------------	----------------	-----------------	------	------	----------

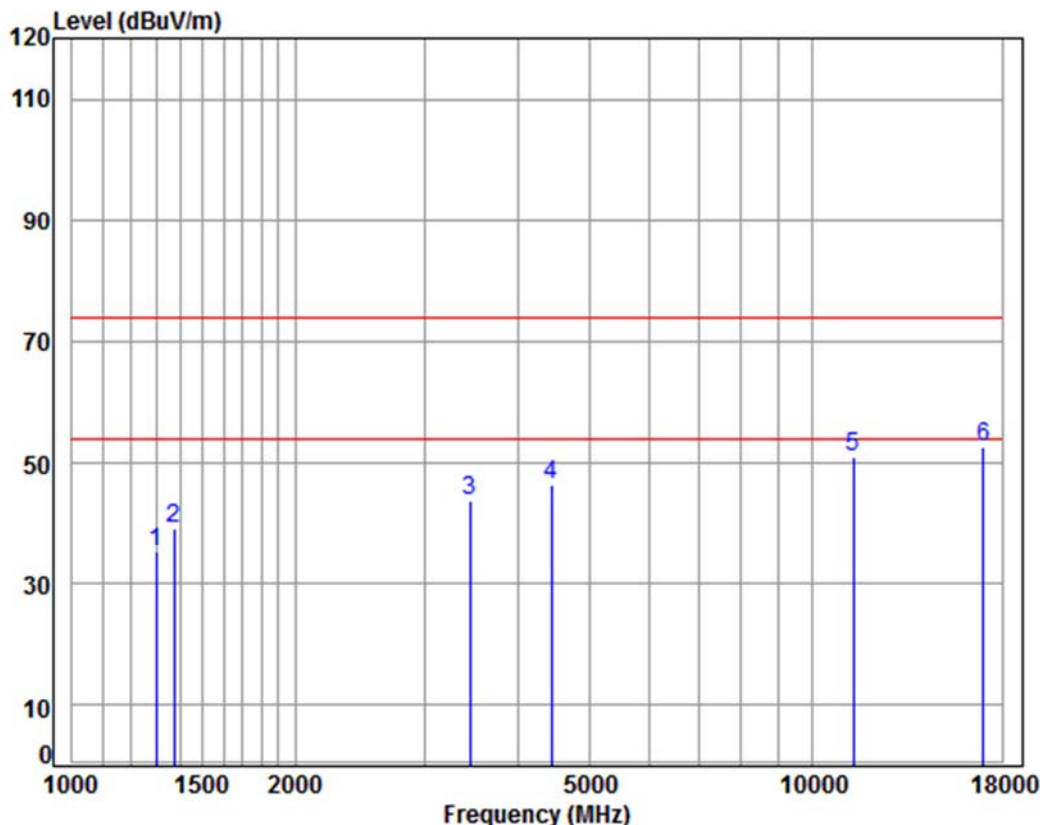

Condition: 3m VERTICAL

Job No : 09260RG

Mode : 5670 TX RSE

: 5G WIFI 11AC40

	Freq	Cable Loss	Ant Factor	Preamplifier Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1297.103	4.79	24.94	38.06	43.67	35.34	74.00	-38.66	peak
2	1374.295	5.06	25.28	38.05	47.06	39.35	74.00	-34.65	peak
3	3445.535	6.41	32.11	37.95	43.20	43.77	74.00	-30.23	peak
4	4443.453	7.50	33.60	38.24	43.63	46.49	74.00	-27.51	peak
5	11340.000	11.98	37.97	35.82	36.93	51.06	74.00	-22.94	peak
6	17010.000	16.69	42.81	36.29	29.34	52.55	74.00	-21.45	peak




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM170800926003

Page: 235 of 411

Test mode:	802.11ac(HT40)	Frequency(MHz):	5670	Peak	Horizontal
------------	----------------	-----------------	------	------	------------

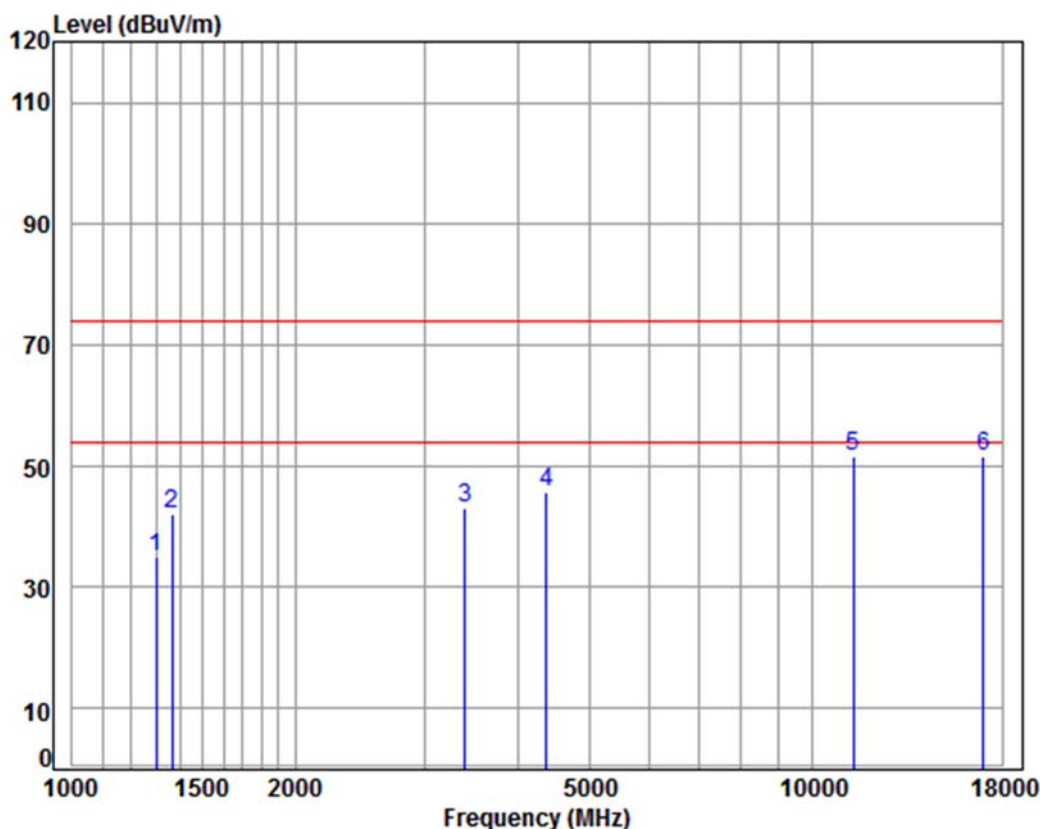

Condition: 3m HORIZONTAL

Job No : 09260RG

Mode : 5670 TX RSE

: 5G WIFI 11AC40

	Freq	Cable Loss	Ant Factor	Preamplifier Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1300.858	4.80	24.96	38.06	43.34	35.04	74.00	-38.96	peak
2	1366.374	5.04	25.25	38.05	50.05	42.29	74.00	-31.71	peak
3	3396.098	6.37	32.02	37.94	42.80	43.25	74.00	-30.75	peak
4	4367.058	7.41	33.60	38.20	43.01	45.82	74.00	-28.18	peak
5	pp11340.000	11.98	37.97	35.82	37.47	51.60	74.00	-22.40	peak
6	17010.000	16.69	42.81	36.29	28.39	51.60	74.00	-22.40	peak




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM170800926003

Page: 236 of 411

Test mode:	802.11ac(HT40)	Frequency(MHz):	5755	Peak	Vertical
------------	----------------	-----------------	------	------	----------

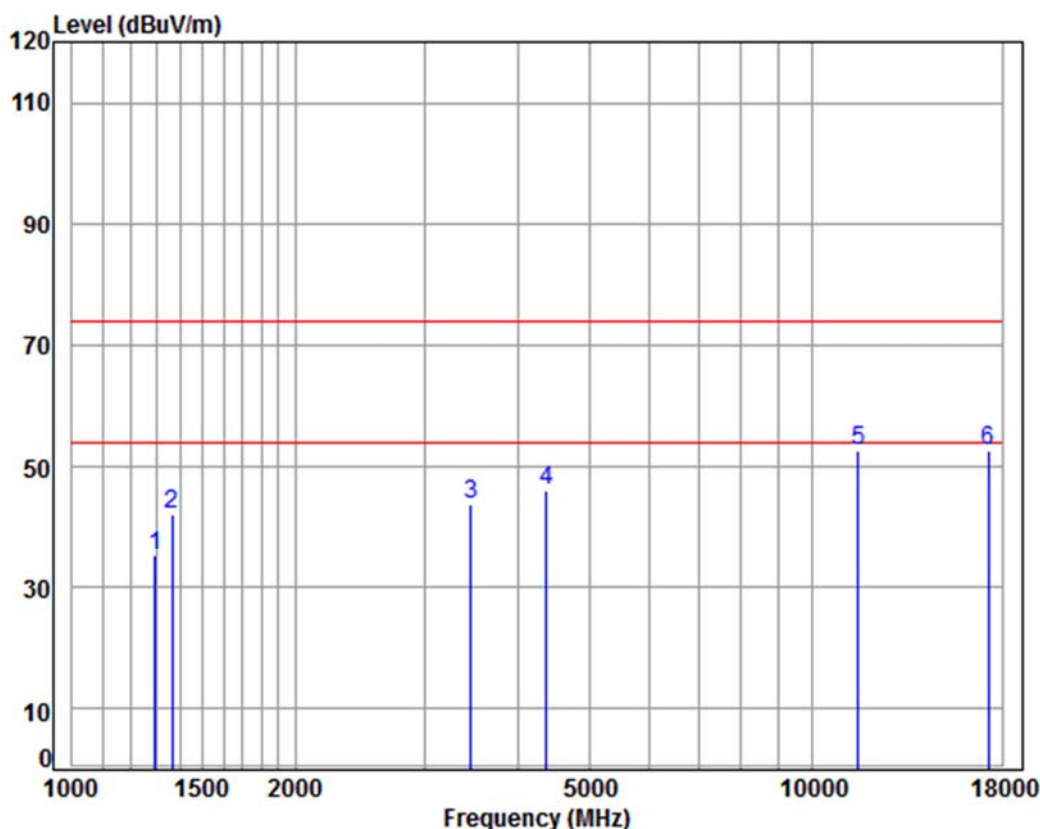

Condition: 3m VERTICAL

Job No : 09260RG

Mode : 5755 TX RSE

: 5G WIFI 11AC40

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1293.359	4.77	24.92	38.06	43.78	35.41	74.00	-38.59	peak
2	1366.374	5.04	25.25	38.05	50.08	42.32	74.00	-31.68	peak
3	3455.508	6.42	32.13	37.95	43.29	43.89	74.00	-30.11	peak
4	4367.058	7.41	33.60	38.20	43.41	46.22	74.00	-27.78	peak
5	pp11510.000	12.14	38.11	36.03	38.30	52.52	74.00	-21.48	peak
6	17265.000	16.12	43.12	36.16	29.41	52.49	74.00	-21.51	peak




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM170800926003

Page: 237 of 411

Test mode:	802.11ac(HT40)	Frequency(MHz):	5755	Peak	Horizontal
------------	----------------	-----------------	------	------	------------

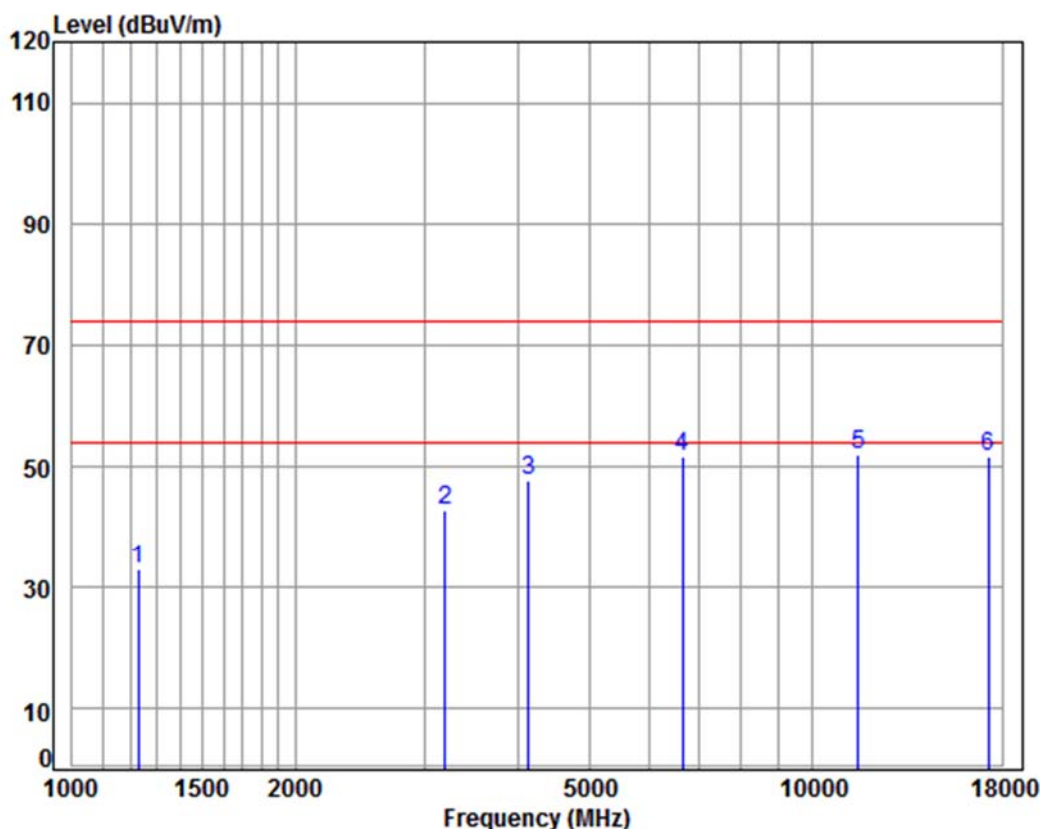

Condition: 3m HORIZONTAL

Job No : 09260RG

Mode : 5755 TX RSE

: 5G WIFI 11AC40

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1227.791	4.53	24.61	38.07	41.85	32.92	74.00	-41.08	Peak
2	3186.869	6.17	31.65	37.92	43.06	42.96	74.00	-31.04	peak
3	4133.699	7.14	33.60	38.07	45.05	47.72	74.00	-26.28	peak
4	6659.763	11.08	35.56	37.62	42.55	51.57	74.00	-22.43	Peak
5	pp11510.000	12.14	38.11	36.03	37.89	52.11	74.00	-21.89	peak
6	17265.000	16.12	43.12	36.16	28.64	51.72	74.00	-22.28	peak




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM170800926003

Page: 238 of 411

Test mode:	802.11ac(HT40)	Frequency(MHz):	5795	Peak	Vertical
------------	----------------	-----------------	------	------	----------

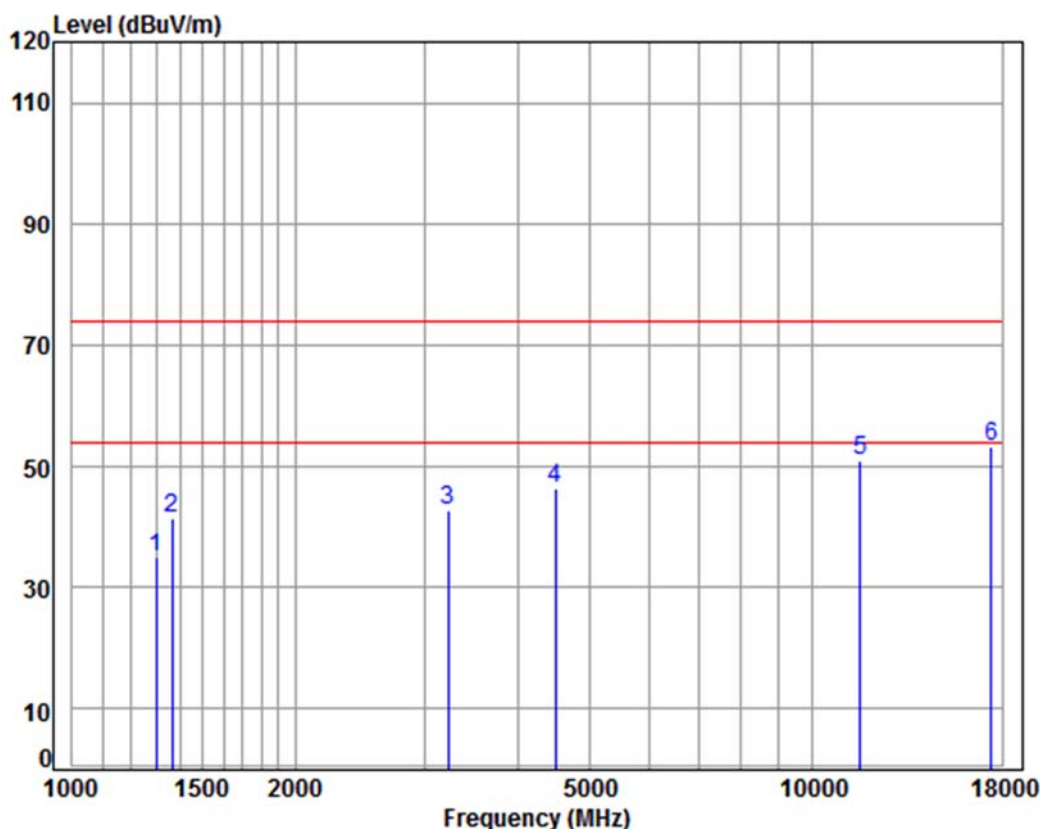

Condition: 3m VERTICAL

Job No : 09260RG

Mode : 5795 TX RSE

: 5G WIFI 11AC40

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1297.103	4.79	24.94	38.06	43.43	35.10	74.00	-38.90	peak
2	1366.374	5.04	25.25	38.05	49.43	41.67	74.00	-32.33	peak
3	3214.623	6.20	31.70	37.92	43.00	42.98	74.00	-31.02	peak
4	4495.125	7.55	33.60	38.26	43.57	46.46	74.00	-27.54	peak
5	11590.000	12.17	38.19	36.12	36.67	50.91	74.00	-23.09	peak
6	pp17385.000	15.85	43.26	36.10	30.43	53.44	74.00	-20.56	peak




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM170800926003

Page: 239 of 411

Test mode:	802.11ac(HT40)	Frequency(MHz):	5795	Peak	Horizontal
------------	----------------	-----------------	------	------	------------

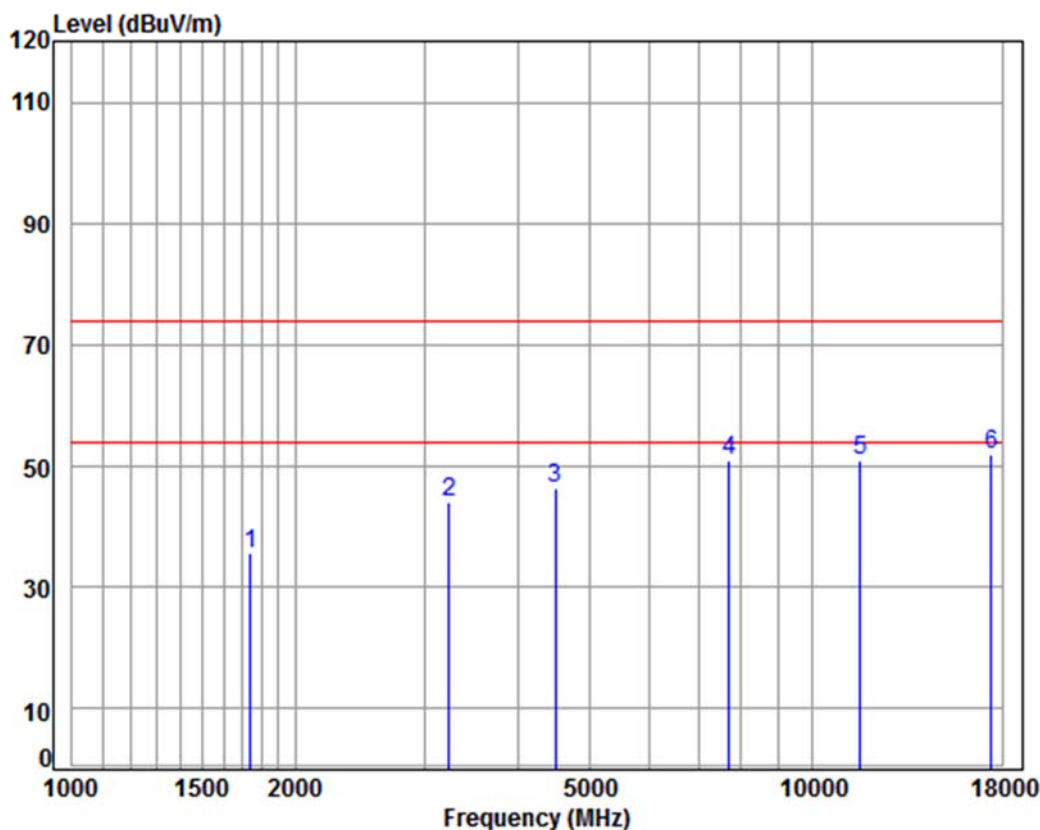

Condition: 3m HORIZONTAL

Job No : 09260RG

Mode : 5795 TX RSE

: 5G WIFI 11AC40

	Freq	Cable Loss	Ant Factor	Preamplifier Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1741.856	5.18	26.84	38.02	41.54	35.54	74.00	-38.46	Peak
2	3233.260	6.21	31.74	37.93	44.09	44.11	74.00	-29.89	peak
3	4495.125	7.55	33.60	38.26	43.45	46.34	74.00	-27.66	peak
4	7717.518	9.98	36.43	36.64	41.38	51.15	74.00	-22.85	Peak
5	11590.000	12.17	38.19	36.12	36.76	51.00	74.00	-23.00	peak
6	pp17385.000	15.85	43.26	36.10	29.11	52.12	74.00	-21.88	peak




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM170800926003

Page: 240 of 411

Test mode:	802.11ac(HT80)	Frequency(MHz):	5210	Peak	Vertical
------------	----------------	-----------------	------	------	----------

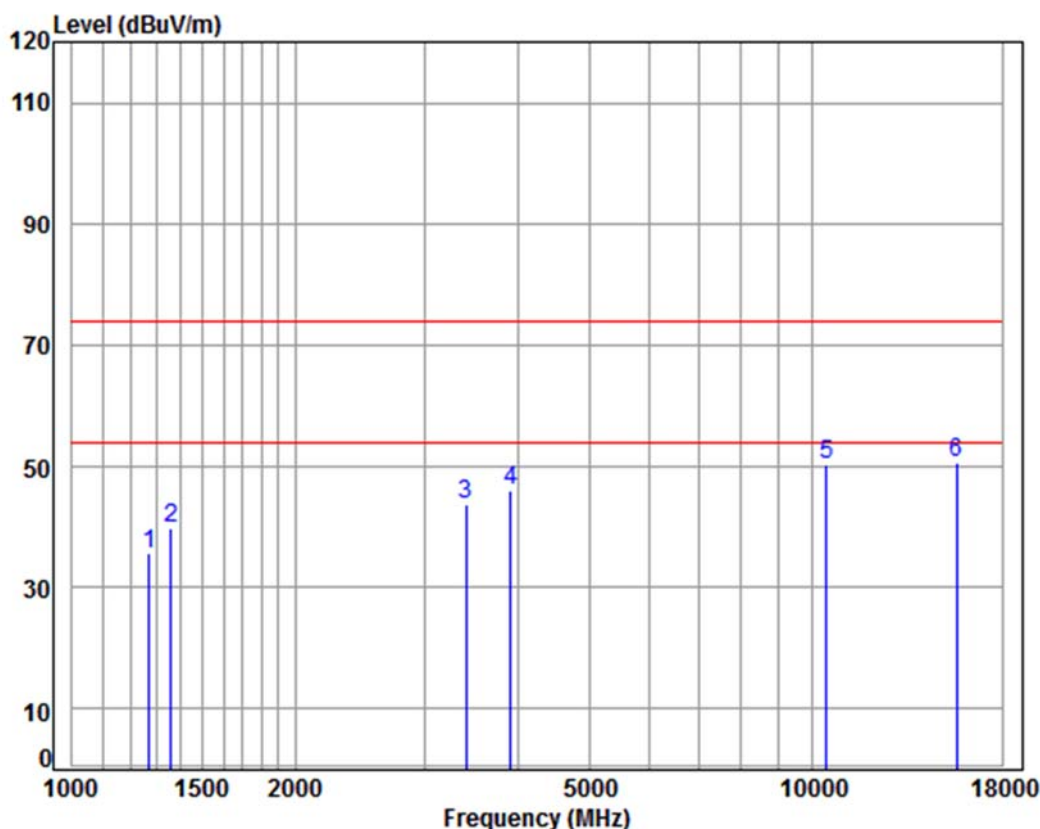

Condition: 3m VERTICAL

Job No : 09260RG

Mode : 5210 TX RSE

: 5G WIFI 11AC80

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1271.123	4.69	24.82	38.07	44.10	35.54	74.00	-38.46	peak
2	1362.430	5.02	25.23	38.06	47.64	39.83	74.00	-34.17	peak
3	3405.929	6.38	32.04	37.94	43.36	43.84	74.00	-30.16	peak
4	3912.809	6.89	33.37	37.99	43.70	45.97	74.00	-28.03	peak
5	10420.000	11.24	37.18	35.12	37.06	50.36	74.00	-23.64	peak
6	15630.000	14.44	41.35	38.20	33.06	50.65	74.00	-23.35	peak




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM170800926003

Page: 241 of 411

Test mode:	802.11ac(HT80)	Frequency(MHz):	5210	Peak	Horizontal
------------	----------------	-----------------	------	------	------------

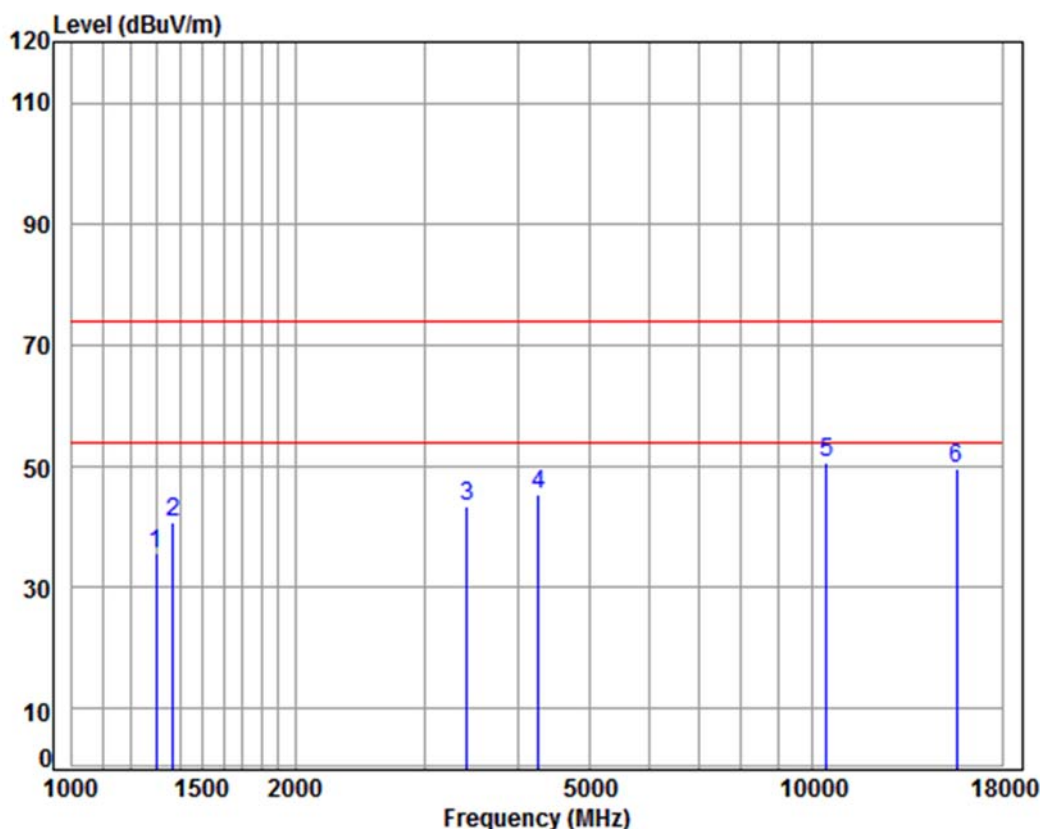

Condition: 3m HORIZONTAL

Job No : 09260RG

Mode : 5210 TX RSE

: 5G WIFI 11AC80

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1297.103	4.79	24.94	38.06	43.92	35.59	74.00	-38.41	peak
2	1370.328	5.05	25.26	38.05	48.76	41.02	74.00	-32.98	peak
3	3415.787	6.38	32.06	37.95	42.84	43.33	74.00	-30.67	peak
4	4267.237	7.30	33.60	38.14	42.75	45.51	74.00	-28.49	peak
5	pp10420.000	11.24	37.18	35.12	37.29	50.59	74.00	-23.41	peak
6	15630.000	14.44	41.35	38.20	32.24	49.83	74.00	-24.17	peak




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM170800926003

Page: 242 of 411

Test mode:	802.11ac(HT80)	Frequency(MHz):	5290	Peak	Vertical
------------	----------------	-----------------	------	------	----------

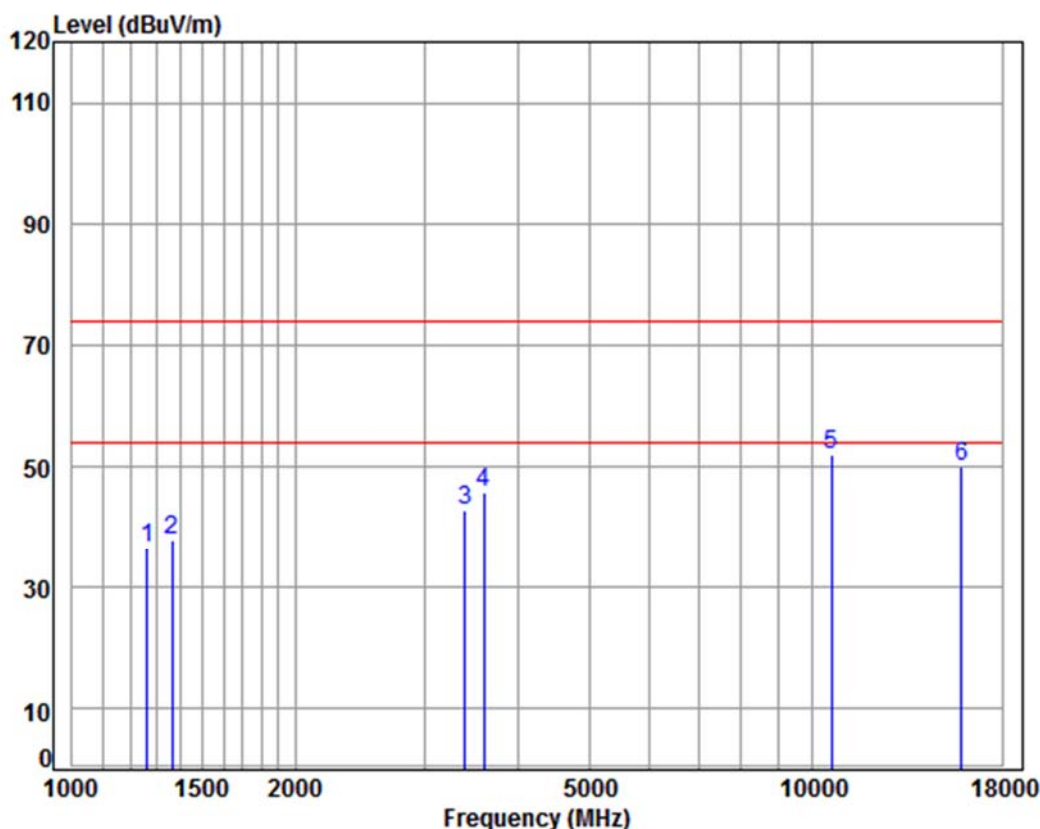

Condition: 3m VERTICAL

Job No : 09260RG

Mode : 5290 TX RSE

: 5G WIFI 11AC80

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit	Over	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1263.796	4.66	24.79	38.07	45.28	36.66	74.00	-37.34	peak
2	1366.374	5.04	25.25	38.05	45.61	37.85	74.00	-36.15	peak
3	3396.098	6.37	32.02	37.94	42.50	42.95	74.00	-31.05	peak
4	3598.203	6.57	32.49	37.96	44.59	45.69	74.00	-28.31	peak
5	pp10580.000	11.35	37.20	35.20	38.60	51.95	74.00	-22.05	peak
6	15870.000	14.80	41.25	37.94	32.04	50.15	74.00	-23.85	peak




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM170800926003

Page: 243 of 411

Test mode:	802.11ac(HT80)	Frequency(MHz):	5290	Peak	Horizontal
------------	----------------	-----------------	------	------	------------

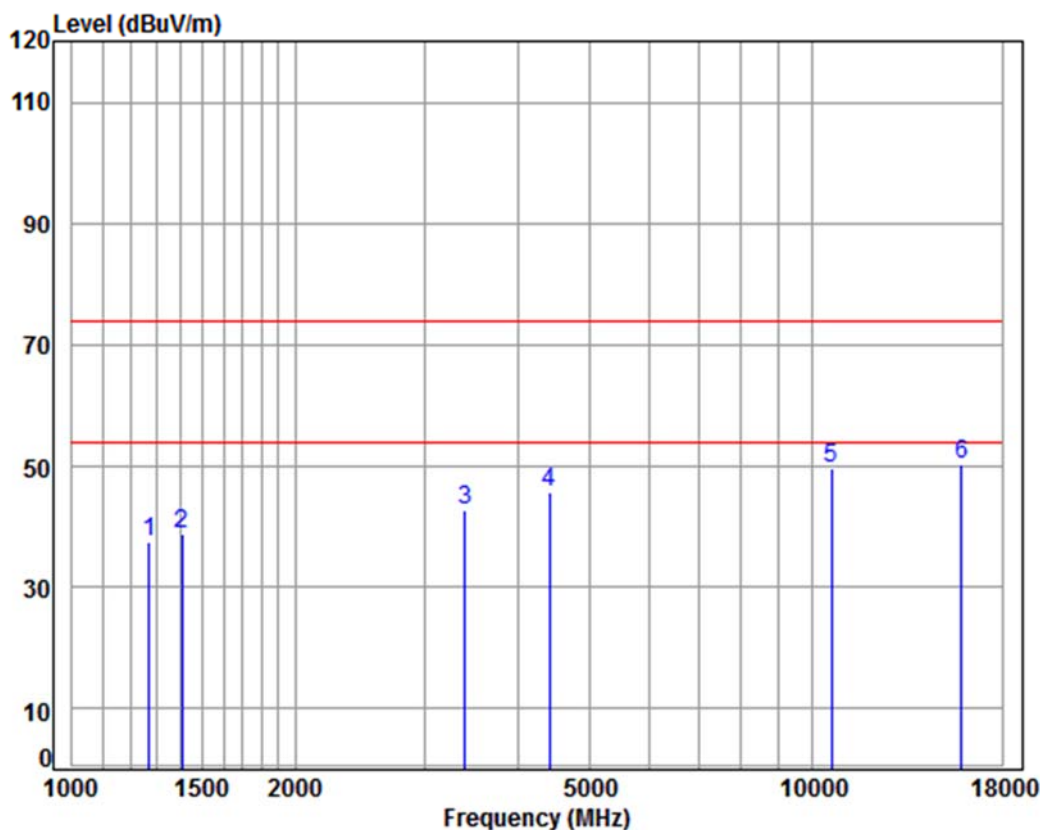

Condition: 3m HORIZONTAL

Job No : 09260RG

Mode : 5290 TX RSE

: 5G WIFI 11AC80

	Freq	Cable Loss	Ant Factor	Preamplifier Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1271.123	4.69	24.82	38.07	46.21	37.65	74.00	-36.35	peak
2	1406.443	5.17	25.42	38.05	46.21	38.75	74.00	-35.25	peak
3	3396.098	6.37	32.02	37.94	42.53	42.98	74.00	-31.02	peak
4	4405.090	7.46	33.60	38.22	42.99	45.83	74.00	-28.17	peak
5	10580.000	11.35	37.20	35.20	36.35	49.70	74.00	-24.30	peak
6	15870.000	14.80	41.25	37.94	32.26	50.37	74.00	-23.63	peak




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM170800926003

Page: 244 of 411

Test mode:	802.11ac(HT80)	Frequency(MHz):	5530	Peak	Vertical
------------	----------------	-----------------	------	------	----------

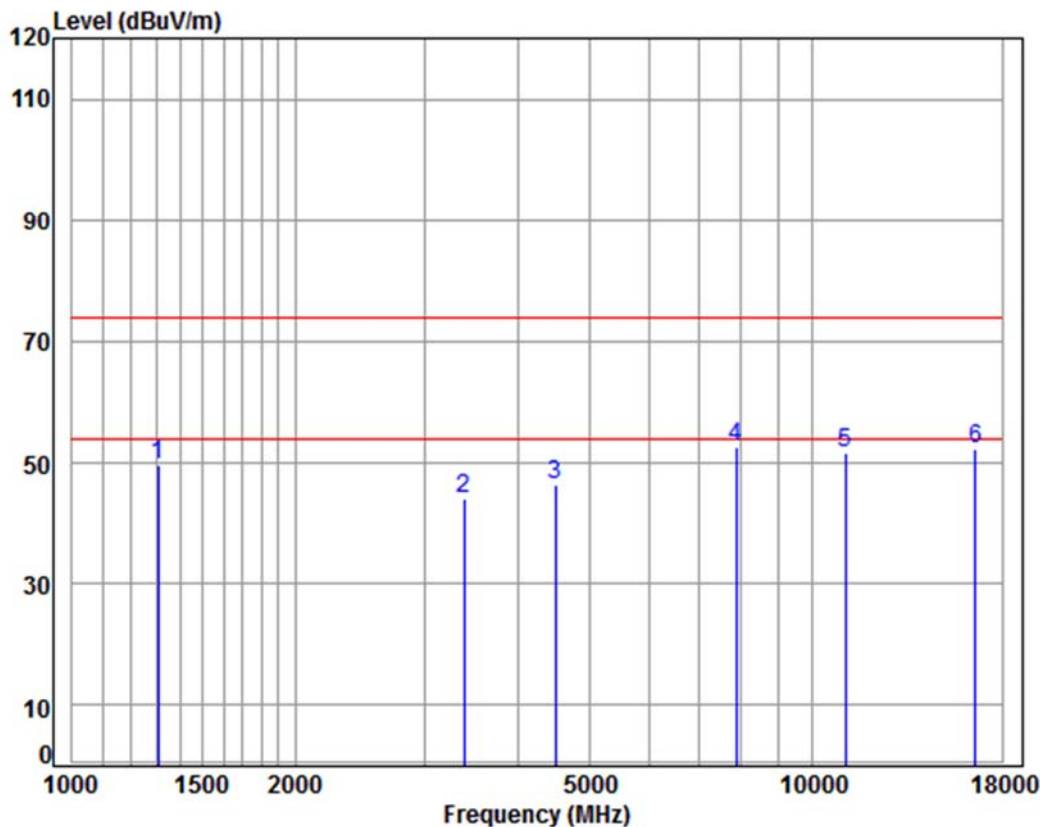

Condition: 3m HORIZONTAL

Job No : 09260RG

Mode : 5530 TX RSE

: 5G WIFI 11AC80

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1308.399	4.83	24.99	38.06	57.91	49.67	74.00	-24.33	Peak
2	3386.297	6.36	32.01	37.94	43.63	44.06	74.00	-29.94	peak
3	4495.125	7.55	33.60	38.26	43.52	46.41	74.00	-27.59	peak
4 pp	7875.254	9.96	36.53	36.51	42.63	52.61	74.00	-21.39	Peak
5	11060.000	11.69	37.75	35.48	37.59	51.55	74.00	-22.45	peak
6	16590.000	14.90	42.72	36.90	31.56	52.28	74.00	-21.72	peak




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM170800926003

Page: 245 of 411

Test mode:	802.11ac(HT80)	Frequency(MHz):	5530	Peak	Horizontal
------------	----------------	-----------------	------	------	------------

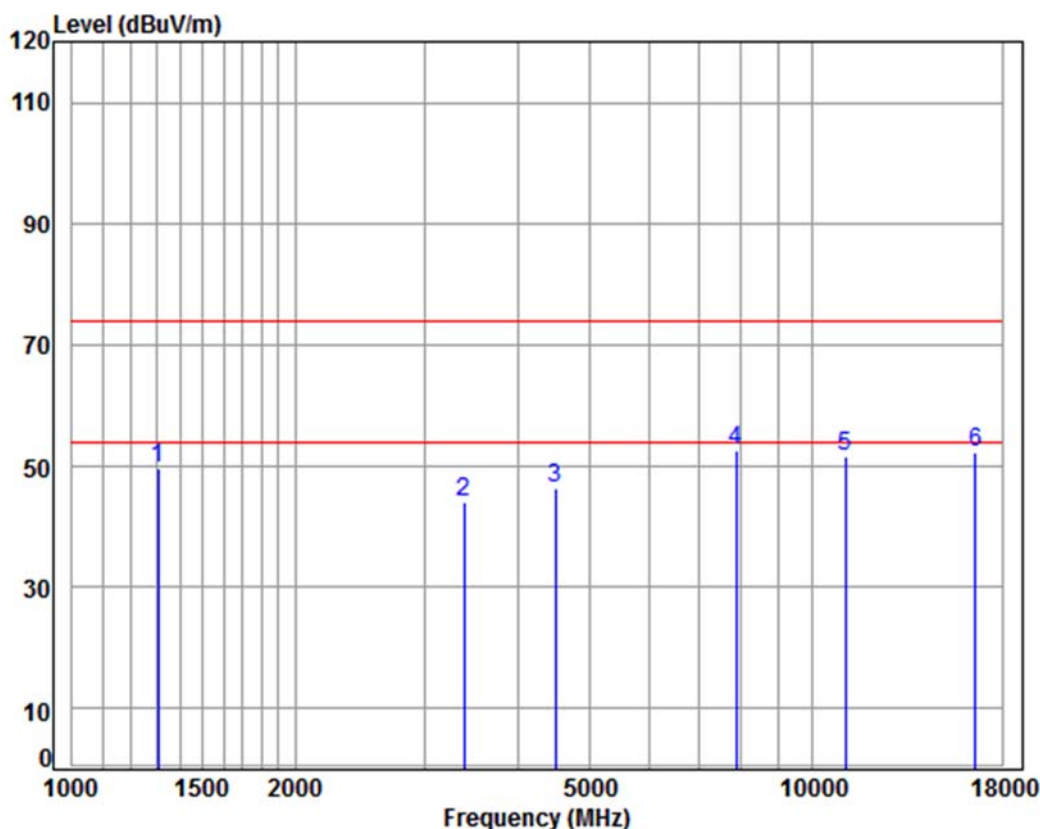

Condition: 3m HORIZONTAL

Job No : 09260RG

Mode : 5530 TX RSE

: 5G WIFI 11AC80

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1308.399	4.83	24.99	38.06	57.91	49.67	74.00	-24.33	Peak
2	3386.297	6.36	32.01	37.94	43.63	44.06	74.00	-29.94	peak
3	4495.125	7.55	33.60	38.26	43.52	46.41	74.00	-27.59	peak
4 pp	7875.254	9.96	36.53	36.51	42.63	52.61	74.00	-21.39	Peak
5	11060.000	11.69	37.75	35.48	37.59	51.55	74.00	-22.45	peak
6	16590.000	14.90	42.72	36.90	31.56	52.28	74.00	-21.72	peak




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM170800926003

Page: 246 of 411

Test mode:	802.11ac(HT80)	Frequency(MHz):	5610	Peak	Vertical
------------	----------------	-----------------	------	------	----------

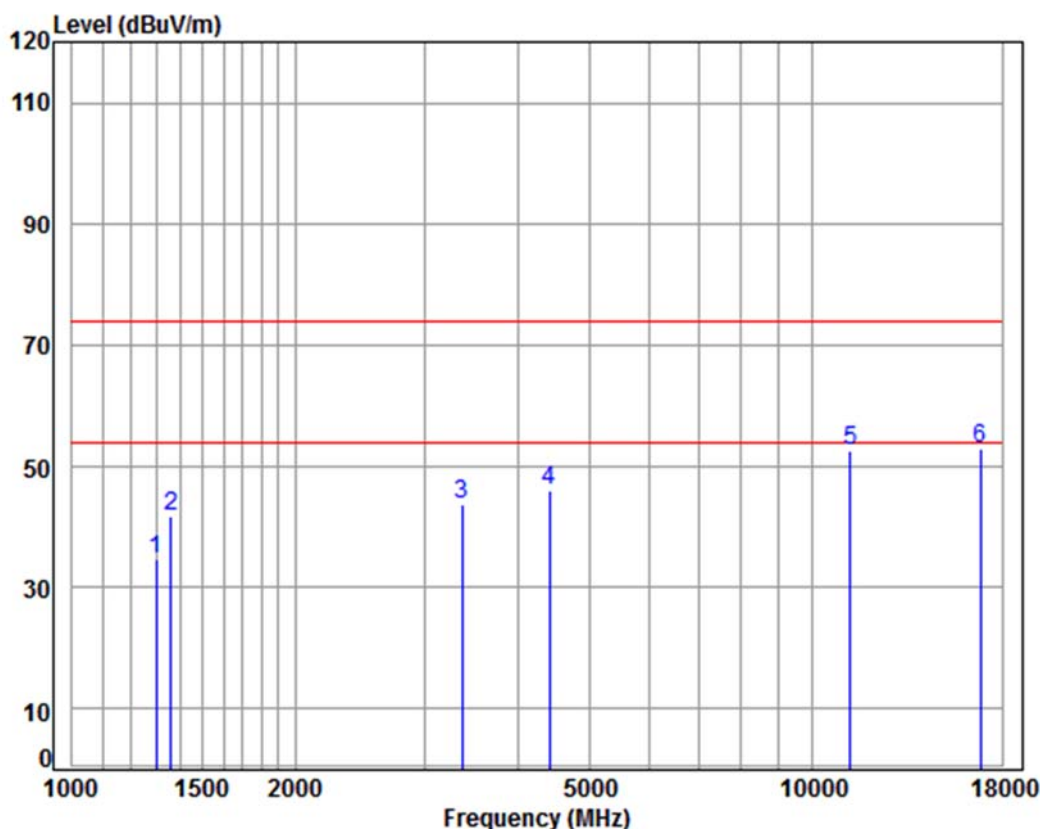

Condition: 3m VERTICAL

Job No : 09260RG

Mode : 5610 TX RSE

: 5G WIFI 11AC80

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1297.103	4.79	24.94	38.06	43.07	34.74	74.00	-39.26	peak
2	1362.430	5.02	25.23	38.06	49.78	41.97	74.00	-32.03	peak
3	3357.061	6.33	31.96	37.94	43.60	43.95	74.00	-30.05	peak
4	4405.090	7.46	33.60	38.22	43.36	46.20	74.00	-27.80	peak
5	11220.000	11.86	37.88	35.67	38.51	52.58	74.00	-21.42	peak
6	pp16830.000	15.97	42.77	36.55	30.92	53.11	74.00	-20.89	peak




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM170800926003

Page: 247 of 411

Test mode:	802.11ac(HT80)	Frequency(MHz):	5610	Peak	Horizontal
------------	----------------	-----------------	------	------	------------

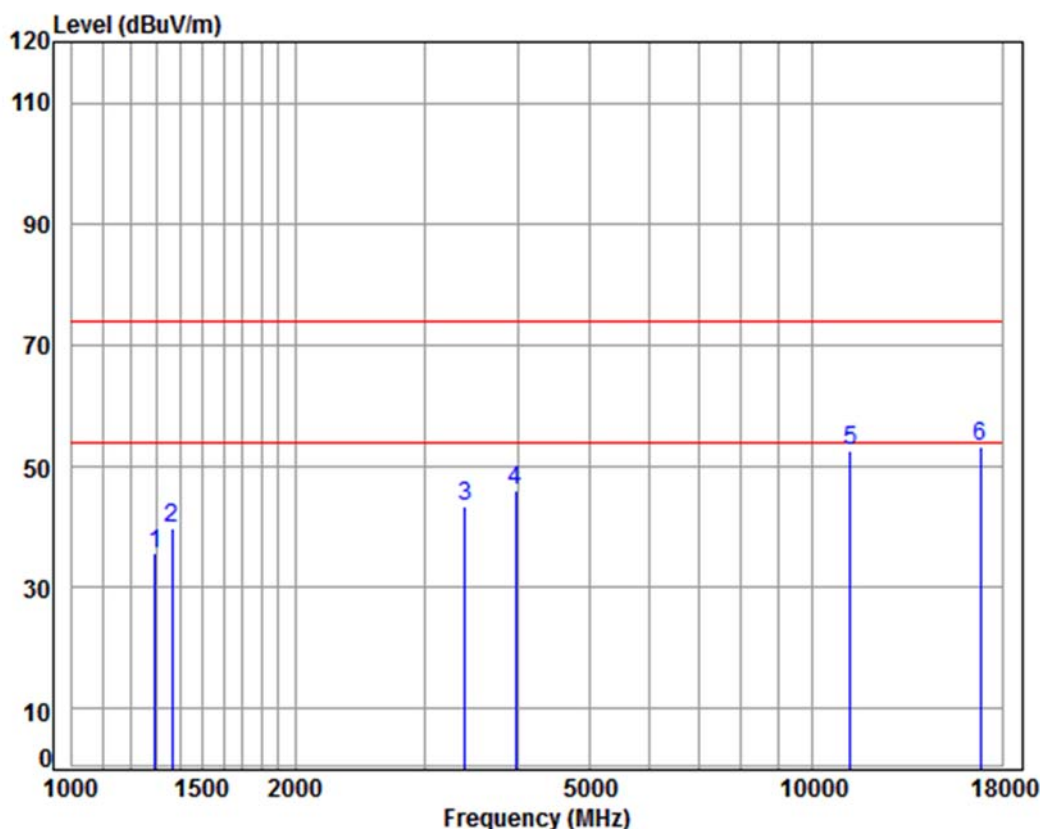

Condition: 3m HORIZONTAL

Job No : 09260RG

Mode : 5610 TX RSE

: 5G WIFI 11AC80

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1293.359	4.77	24.92	38.06	44.15	35.78	74.00	-38.22	peak
2	1366.374	5.04	25.25	38.05	47.78	40.02	74.00	-33.98	peak
3	3396.098	6.37	32.02	37.94	42.93	43.38	74.00	-30.62	peak
4	3969.767	6.95	33.52	38.00	43.58	46.05	74.00	-27.95	peak
5	11220.000	11.86	37.88	35.67	38.49	52.56	74.00	-21.44	peak
6	pp16830.000	15.97	42.77	36.55	31.07	53.26	74.00	-20.74	peak




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM170800926003

Page: 248 of 411

Test mode:	802.11ac(HT80)	Frequency(MHz):	5775	Peak	Vertical
------------	----------------	-----------------	------	------	----------

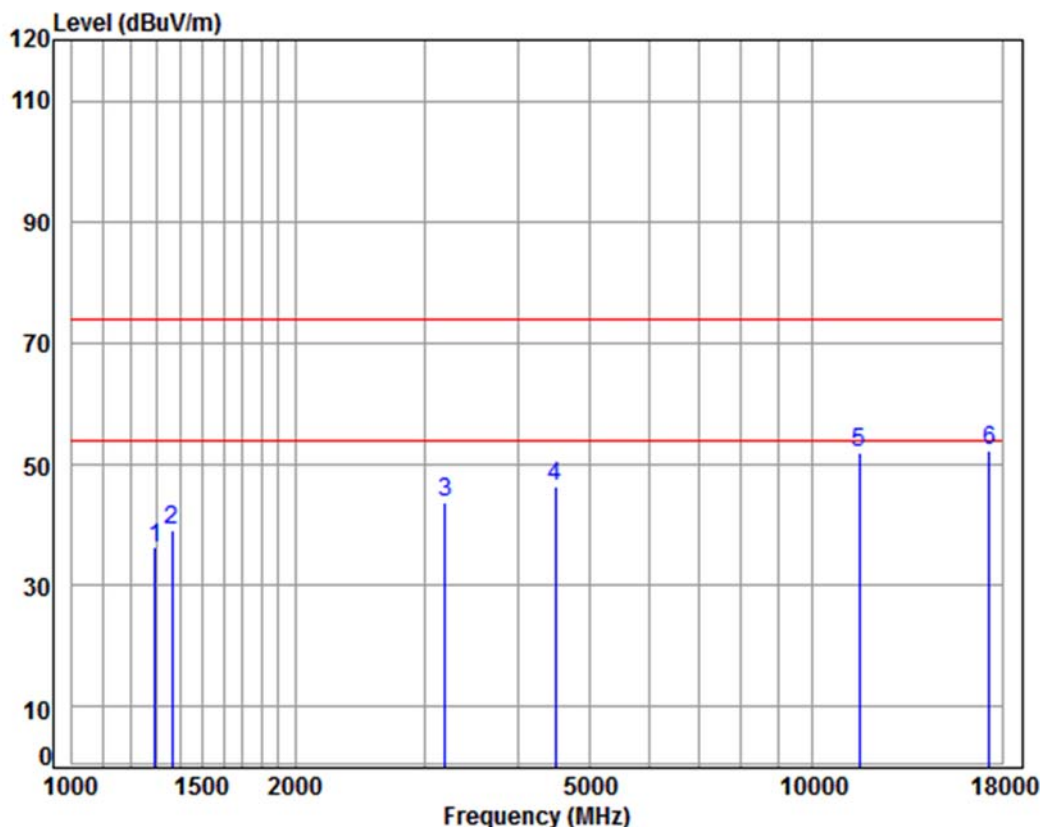

Condition: 3m VERTICAL

Job No : 09260RG

Mode : 5775 TX RSE

: 5G WIFI 11AC80

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1293.359	4.77	24.92	38.06	44.69	36.32	74.00	-37.68	peak
2	1366.374	5.04	25.25	38.05	46.96	39.20	74.00	-34.80	peak
3	3186.869	6.17	31.65	37.92	43.98	43.88	74.00	-30.12	peak
4	4495.125	7.55	33.60	38.26	43.68	46.57	74.00	-27.43	peak
5	11550.000	12.16	38.15	36.07	37.81	52.05	74.00	-21.95	peak
6	pp17325.000	15.98	43.19	36.13	29.38	52.42	74.00	-21.58	peak




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM170800926003

Page: 249 of 411

Test mode:	802.11ac(HT80)	Frequency(MHz):	5775	Peak	Horizontal
------------	----------------	-----------------	------	------	------------

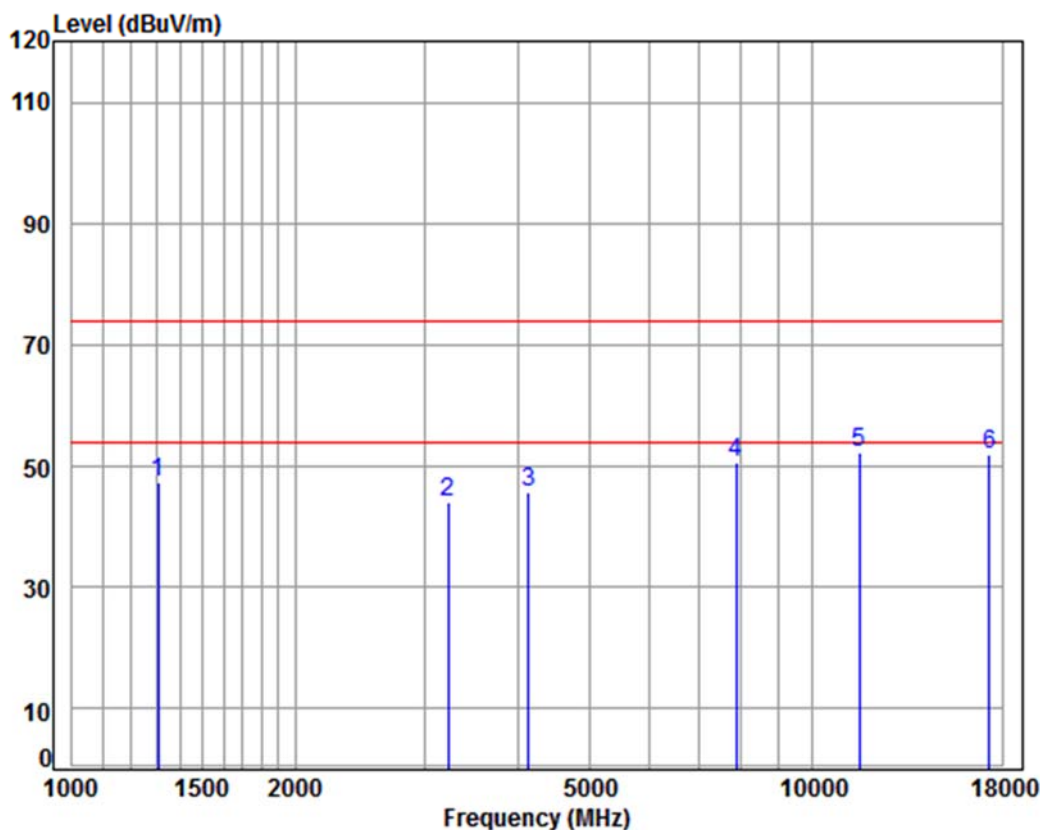

Condition: 3m HORIZONTAL

Job No : 09260RG

Mode : 5775 TX RSE

: 5G WIFI 11AC80

	Freq	Cable Loss	Ant Factor	Preamplifier Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1308.399	4.83	24.99	38.06	55.69	47.45	74.00	-26.55	Peak
2	3214.623	6.20	31.70	37.92	44.13	44.11	74.00	-29.89	peak
3	4133.699	7.14	33.60	38.07	43.01	45.68	74.00	-28.32	peak
4	7875.254	9.96	36.53	36.51	40.80	50.78	74.00	-23.22	Peak
5	11550.000	12.16	38.15	36.07	38.16	52.40	74.00	-21.60	peak
6	17325.000	15.98	43.19	36.13	29.11	52.15	74.00	-21.85	peak



Remark:

1) The field strength is calculated by adding the Antenna Factor, Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows:

Final Test Level = Receiver Reading + Antenna Factor + Cable Factor – Preamplifier Factor

2) Scan from 9kHz to 25GHz, The disturbance above 13GHz and below 30MHz was very low, and the above harmonics were the highest point could be found when testing, so only the above harmonics had been displayed. The amplitude of spurious emissions from the radiator which are attenuated more than 20dB below the limit need not be reported .

3) As shown in this section, for frequencies above 1GHz, the field strength limits are based on average limits. However, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation. So, only the peak measurements were shown in the report.