


6.8 Restricted bands around fundamental frequency

Test Requirement:	47 CFR Part 15 Section 15.407(b)		
Test Method:	ANSI C63.10: 2013		
Test Site:	Measurement Distance: 3m (Semi-Anechoic Chamber)		
Limit:	Frequency	Limit (dBuV/m @3m)	Remark
	30MHz-88MHz	40.0	Quasi-peak Value
	88MHz-216MHz	43.5	Quasi-peak Value
	216MHz-960MHz	46.0	Quasi-peak Value
	960MHz-1GHz	54.0	Quasi-peak Value
	Above 1GHz	54.0	Average Value
		74.0	Peak Value
Test Setup:			

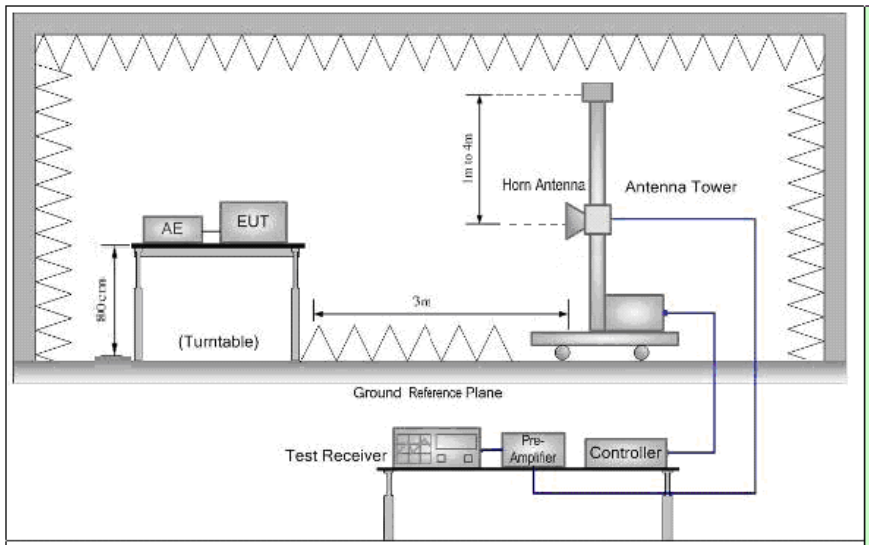

SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM170800926003

Page: 252 of 411

Test Procedure:	a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation. b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower. c. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement. d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading. e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode. f. Place a marker at the end of the restricted band closest to the transmit frequency to show compliance. Also measure any emissions in the restricted bands. Save the spectrum analyzer plot. Repeat for each power and modulation for lowest and highest channel g. Test the EUT in the outermost channels. h. The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, And found the X axis positioning which it is worse case. i. Repeat above procedures until all frequencies measured was complete.
Exploratory Test Mode:	Transmitting with all kind of modulations, data rates.
Final Test Mode:	Through Pre-scan, find the 6Mbps of rate is the worst case of 802.11a; MCSO of rate is the worst case of 802.11n(HT20); MCSO of rate is the worst case of 802.11n(HT40); MCSO of rate is the worst case of 802.11ac(HT20); MCSO of rate is the worst case of 802.11ac(HT40); MCSO of rate is the worst case of 802.11ac(HT80) Only the worst case is recorded in the report.
Instruments Used:	Refer to section 5.10 for details
Test Results:	Pass




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM170800926003

Page: 253 of 411

Test plot as follows:

Test mode:	802.11a	Frequency(MHz):	5180	Peak	Vertical
------------	---------	-----------------	------	------	----------

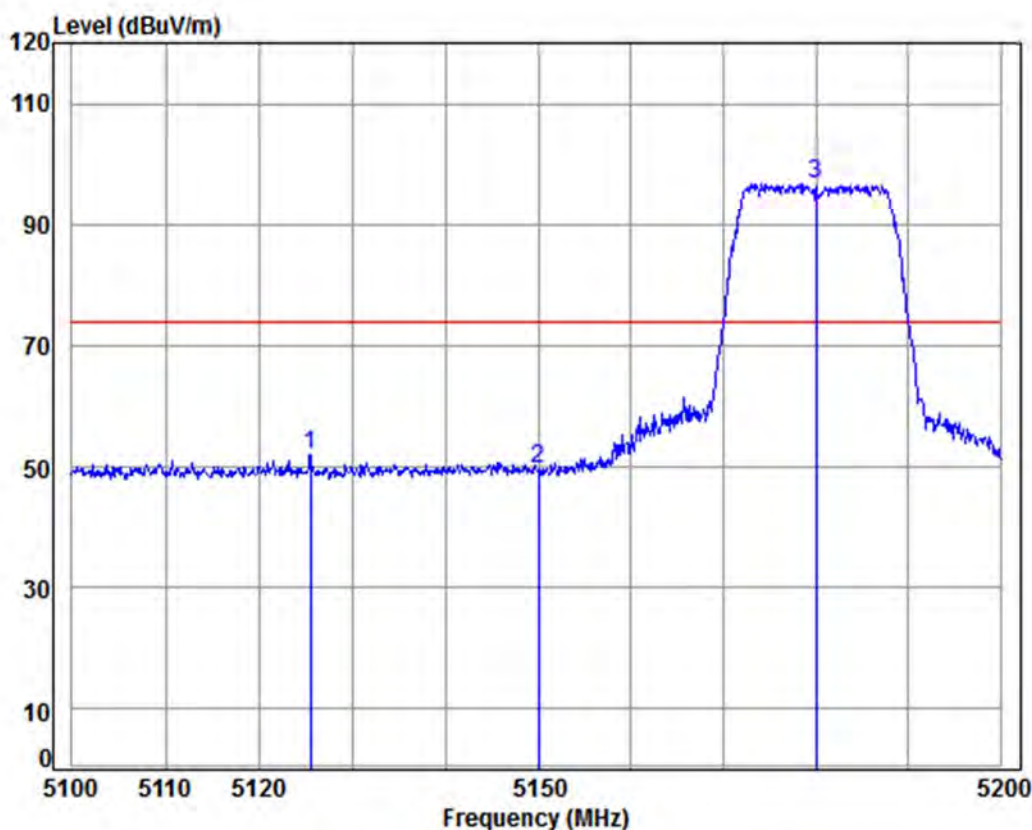

Condition: 3m VERTICAL

Job No : 09260RG

Mode : 5180 Band edge

: 5G WiFi 11A

: 12

		Cable	Ant	Preamp	Read	Limit	Over	
	Freq	Loss	Factor	Factor	Level	Level	Line	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1	5125.515	8.29	34.47	37.38	46.69	52.07	74.00	-21.93 Peak
2	5150.000	8.33	34.47	37.40	44.41	49.81	74.00	-24.19 Peak
3 pp	5180.000	8.37	34.46	37.42	91.39	96.80	74.00	22.80 Peak




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM170800926003

Page: 254 of 411

Test mode:	802.11a	Frequency(MHz):	5180	Average	Vertical
------------	---------	-----------------	------	---------	----------

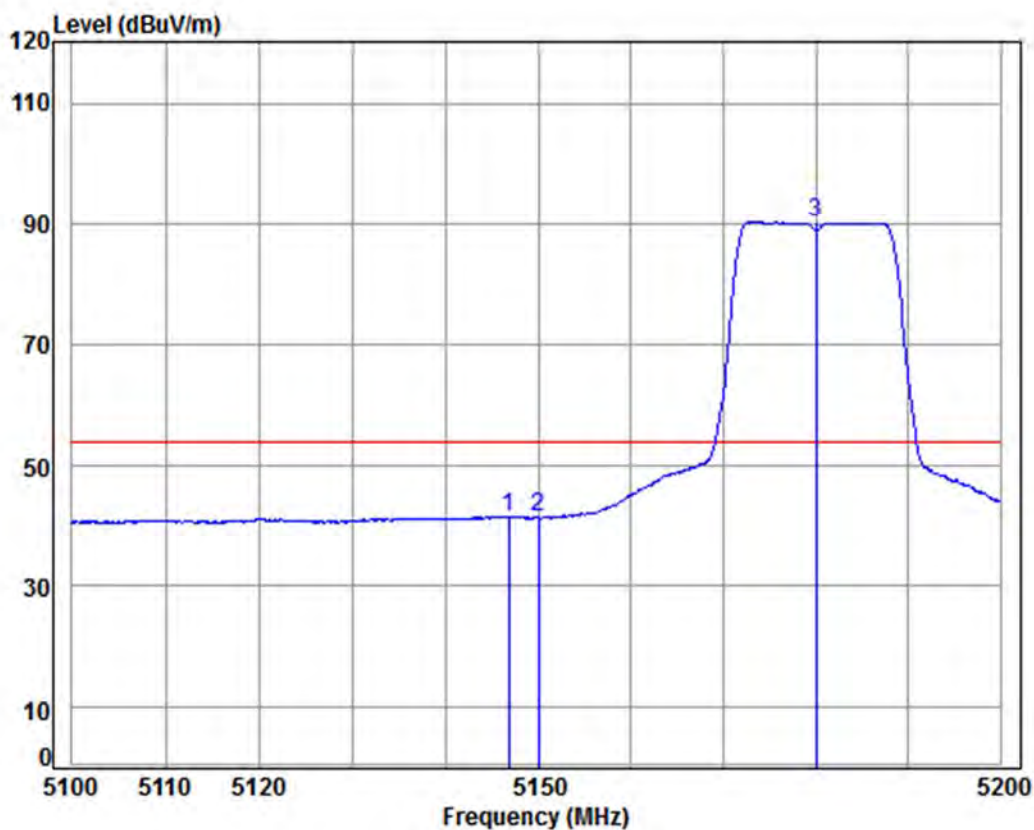

Condition: 3m VERTICAL
Job No : 09260RG
Mode : 5180 Band edge
: 5G WiFi 11A
: 12

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	5146.858	8.32	34.47	37.40	36.25	41.64	54.00	-12.36	Average
2	5150.000	8.33	34.47	37.40	36.09	41.49	54.00	-12.51	Average
3 pp	5180.000	8.37	34.46	37.42	84.88	90.29	54.00	36.29	Average




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM170800926003

Page: 255 of 411

Test mode:	802.11a	Frequency(MHz):	5180	Peak	Horizontal
------------	---------	-----------------	------	------	------------

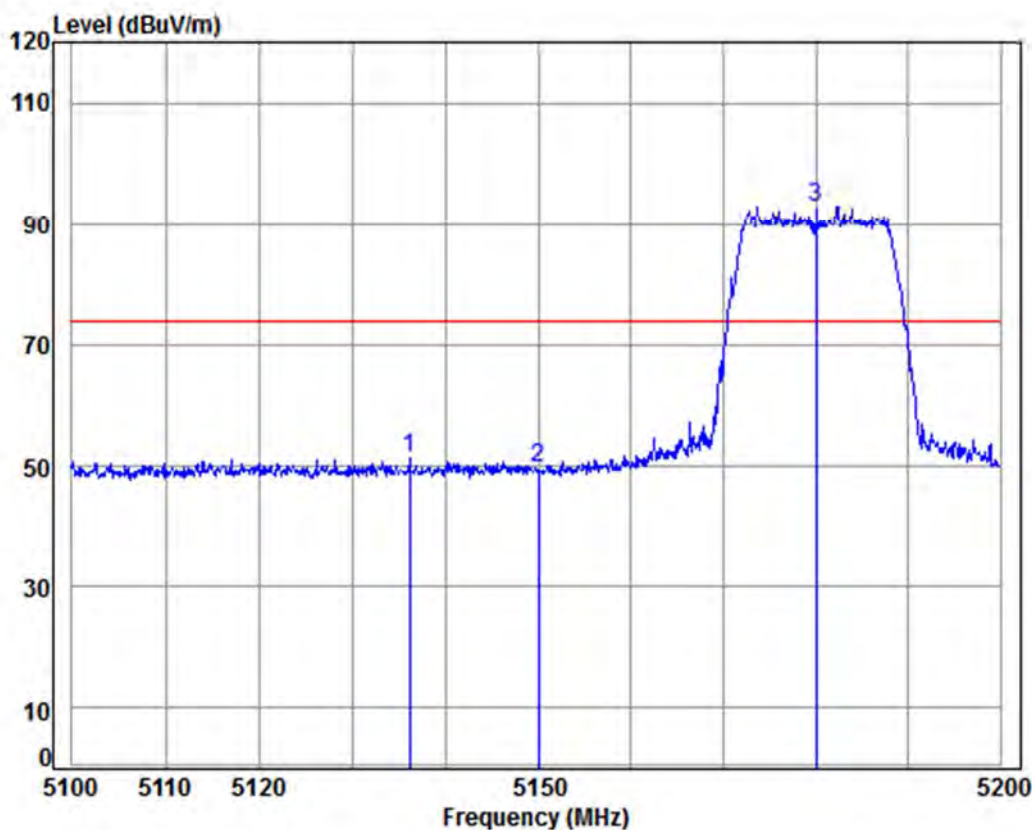

Condition: 3m HORIZONTAL
Job No : 09260RG
Mode : 5180 Band edge
: 5G WiFi 11A
: 12

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	5136.175	8.30	34.47	37.39	46.10	51.48	74.00	-22.52	peak
2	5150.000	8.33	34.47	37.40	44.16	49.56	74.00	-24.44	peak
3	pp 5180.000	8.37	34.46	37.42	87.37	92.78	74.00	18.78	peak




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM170800926003

Page: 256 of 411

Test mode:	802.11a	Frequency(MHz):	5180	Average	Horizontal
------------	---------	-----------------	------	---------	------------

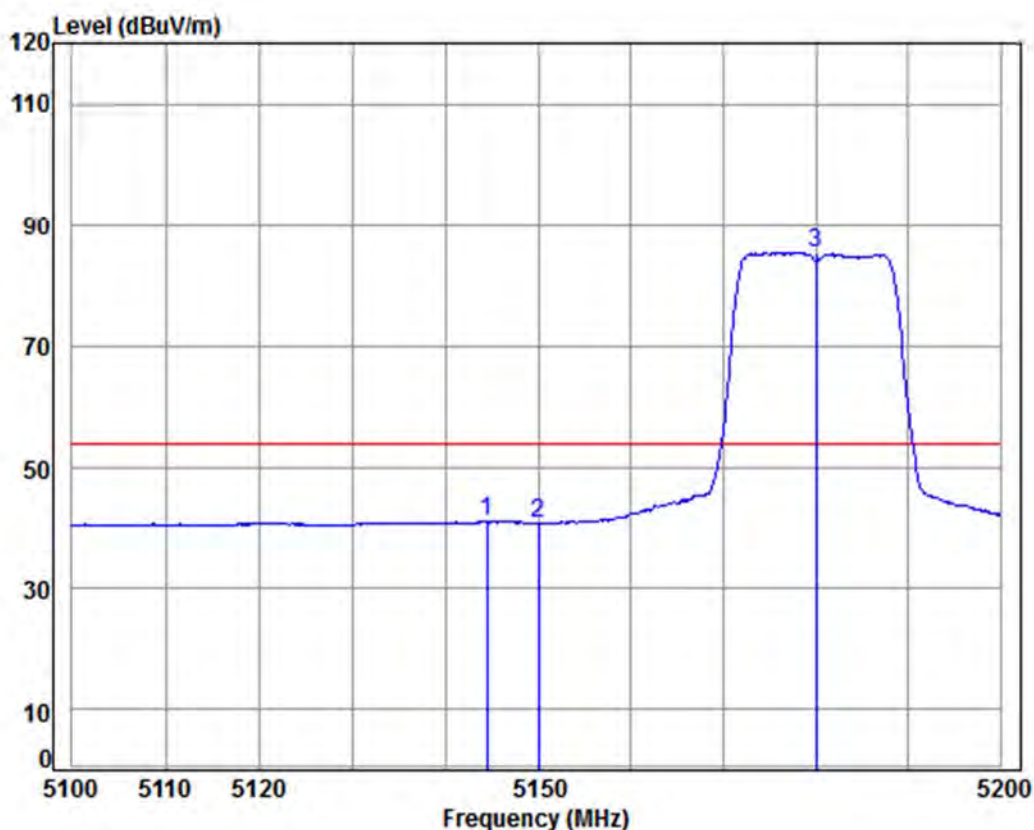

Condition: 3m HORIZONTAL
Job No : 09260RG
Mode : 5180 Band edge
: 5G WiFi 11A
: 12

	Freq	Cable	Ant	Preamp	Read	Limit	Over	
		Loss	Factor	Factor	Level	Line	Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1	5144.460	8.32	34.47	37.39	35.79	41.19	54.00	-12.81 Average
2	5150.000	8.33	34.47	37.40	35.61	41.01	54.00	-12.99 Average
3 pp	5180.000	8.37	34.46	37.42	80.01	85.42	54.00	31.42 Average




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM170800926003

Page: 257 of 411

Test mode:	802.11a	Frequency(MHz):	5240	Peak	Vertical
------------	---------	-----------------	------	------	----------

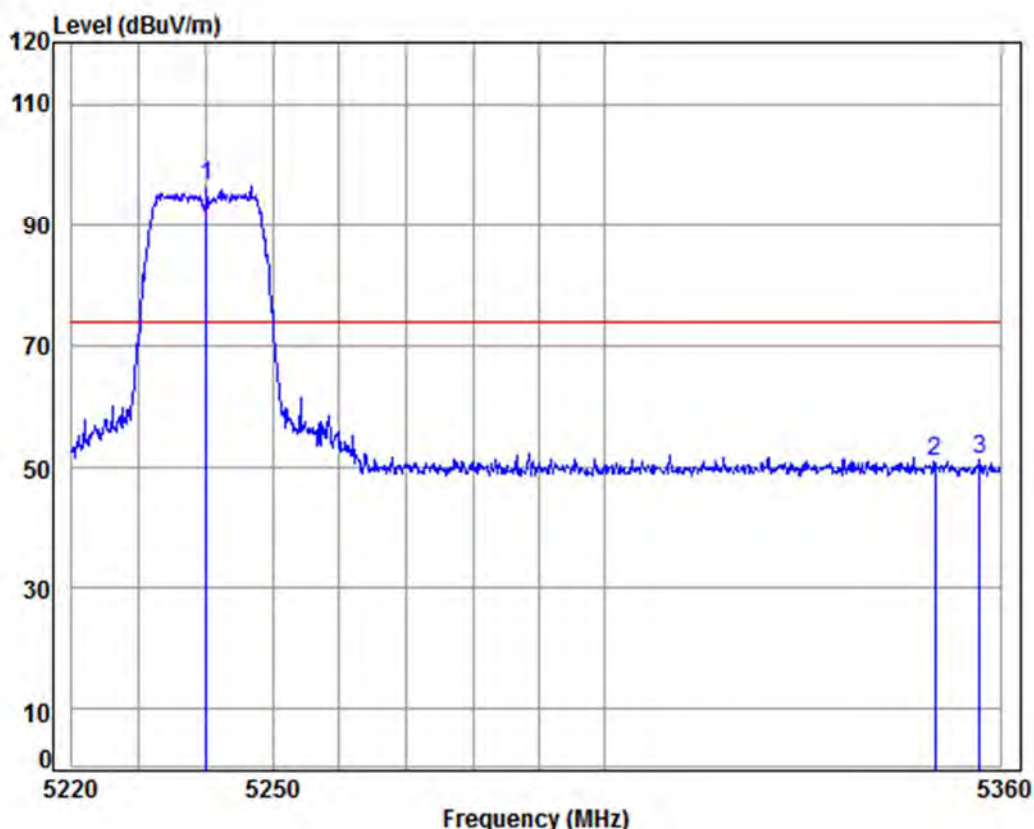

Condition: 3m VERTICAL
Job No : 09260RG
Mode : 5240 Band edge
: 5G WiFi 11A
: 12

		Cable	Ant	Preamp	Read	Limit	Over	
	Freq	Loss	Factor	Factor	Level	Line	Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1	pp 5240.000	8.46	34.45	37.45	90.97	96.43	74.00	22.43 Peak
2	5350.000	8.63	34.43	37.52	45.31	50.85	74.00	-23.15 Peak
3	5356.880	8.64	34.43	37.53	45.64	51.18	74.00	-22.82 Peak




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM170800926003

Page: 258 of 411

Test mode:	802.11a	Frequency(MHz):	5240	Average	Vertical
------------	---------	-----------------	------	---------	----------

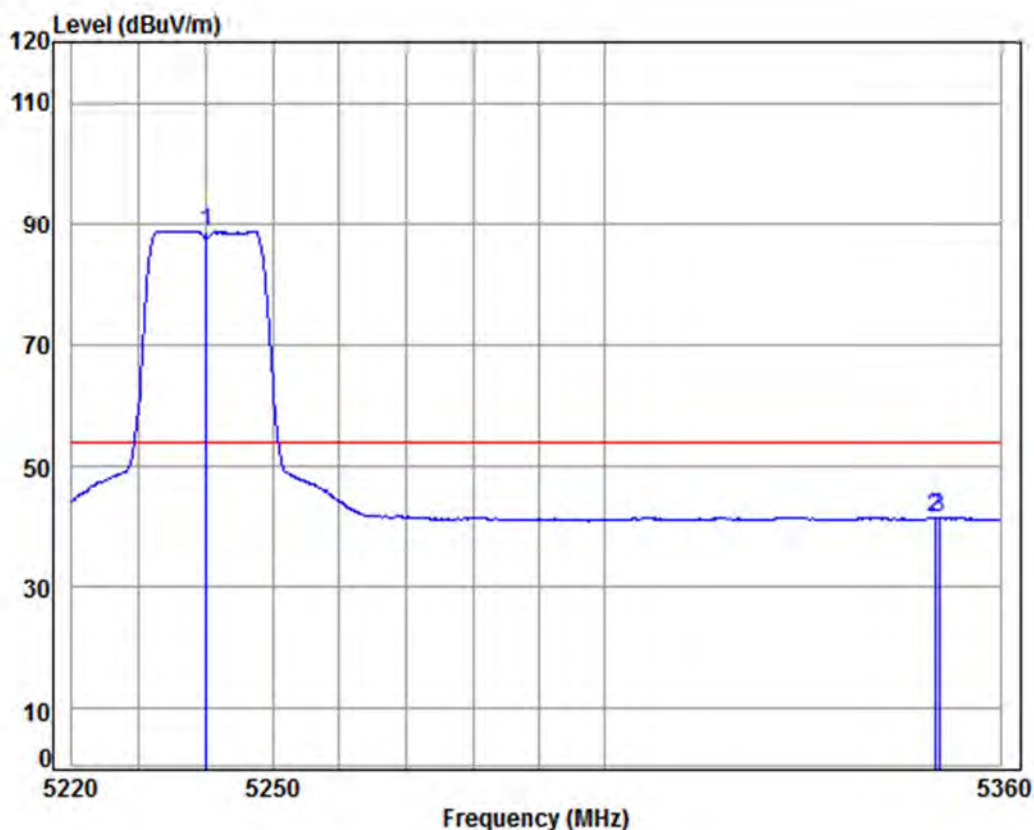

Condition: 3m VERTICAL
Job No : 09260RG
Mode : 5240 Band edge
: 5G WiFi 11A
: 12

		Cable	Ant	Preamp	Read	Limit	Over	
	Freq	Loss	Factor	Factor	Level	Line	Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1 pp	5240.000	8.46	34.45	37.45	83.31	88.77	54.00	34.77 Average
2	5350.000	8.63	34.43	37.52	35.91	41.45	54.00	-12.55 Average
3	5350.646	8.63	34.43	37.52	36.02	41.56	54.00	-12.44 Average




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM170800926003

Page: 259 of 411

Test mode:	802.11a	Frequency(MHz):	5240	Peak	Horizontal
------------	---------	-----------------	------	------	------------

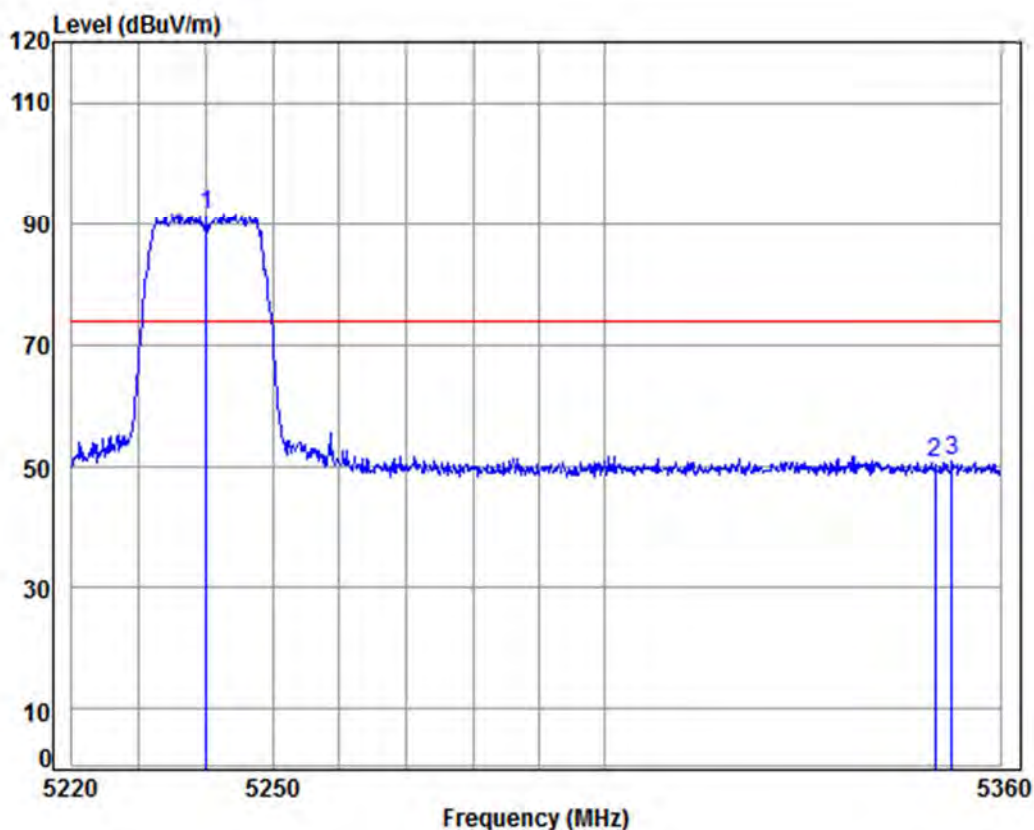

Condition: 3m HORIZONTAL
Job No : 09260RG
Mode : 5240 Band edge
: 5G WiFi 11A
: 12

		Cable	Ant	Preamp	Read	Limit	Over	
	Freq	Loss	Factor	Factor	Level	Line	Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1 pp	5240.000	8.46	34.45	37.45	86.15	91.61	74.00	17.61 peak
2	5350.000	8.63	34.43	37.52	45.25	50.79	74.00	-23.21 peak
3	5352.628	8.63	34.43	37.52	45.33	50.87	74.00	-23.13 peak




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM170800926003

Page: 260 of 411

Test mode:	802.11a	Frequency(MHz):	5240	Average	Horizontal
------------	---------	-----------------	------	---------	------------

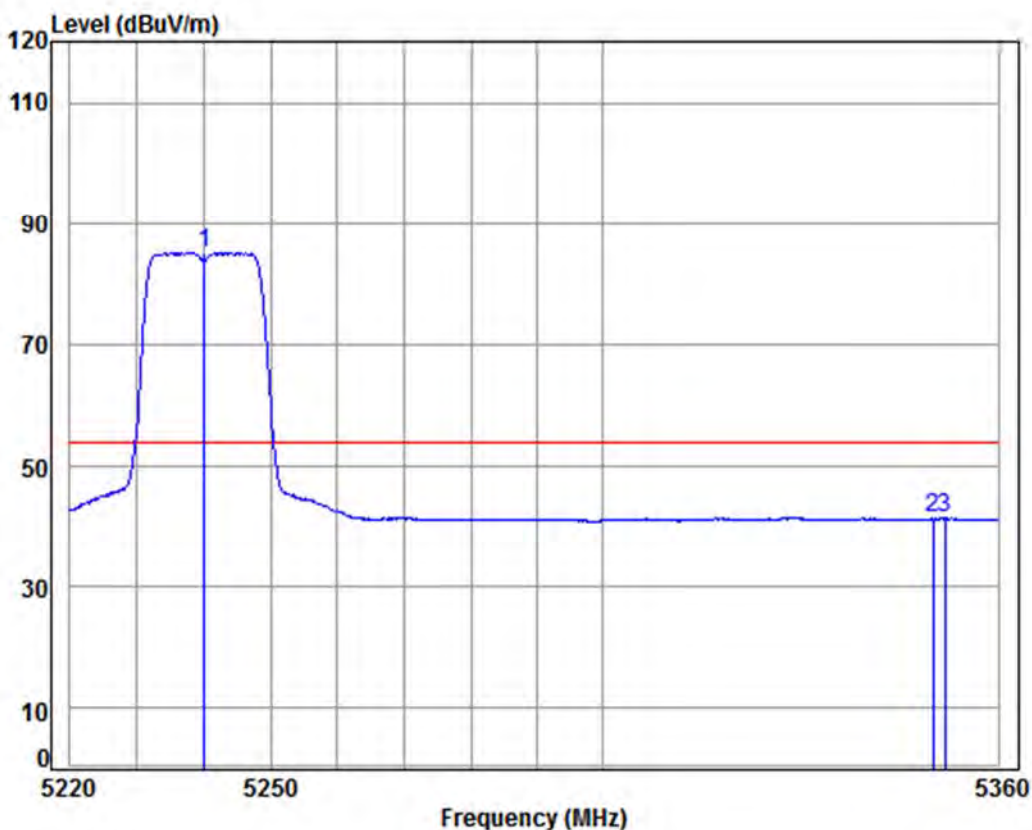

Condition: 3m HORIZONTAL
Job No : 09260RG
Mode : 5240 Band edge
: 5G WiFi 11A
: 12

		Cable	Ant	Preamp	Read	Limit	Over	
	Freq	Loss	Factor	Factor	Level	Line	Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1 pp	5240.000	8.46	34.45	37.45	79.51	84.97	54.00	30.97 Average
2	5350.000	8.63	34.43	37.52	35.83	41.37	54.00	-12.63 Average
3	5351.920	8.63	34.43	37.52	35.88	41.42	54.00	-12.58 Average




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM170800926003

Page: 261 of 411

Test mode:	802.11a	Frequency(MHz):	5260	Peak	Vertical
------------	---------	-----------------	------	------	----------

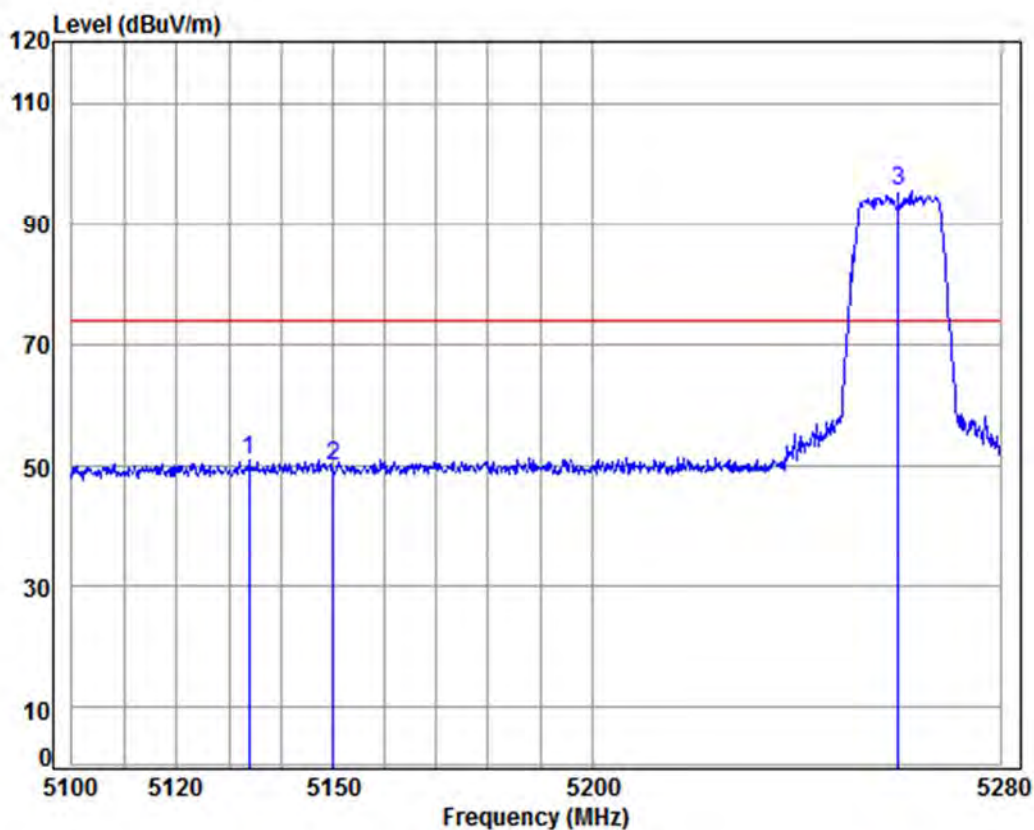

Condition: 3m VERTICAL
Job No : 09260RG
Mode : 5260 Band edge
: 5G WiFi 11A
: 12

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	5133.899	8.30	34.47	37.39	45.50	50.88	74.00	-23.12	Peak
2	5150.000	8.33	34.47	37.40	44.49	49.89	74.00	-24.11	Peak
3 pp	5260.000	8.49	34.45	37.47	89.98	95.45	74.00	21.45	Peak




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM170800926003

Page: 262 of 411

Test mode:	802.11a	Frequency(MHz):	5260	Average	Vertical
------------	---------	-----------------	------	---------	----------

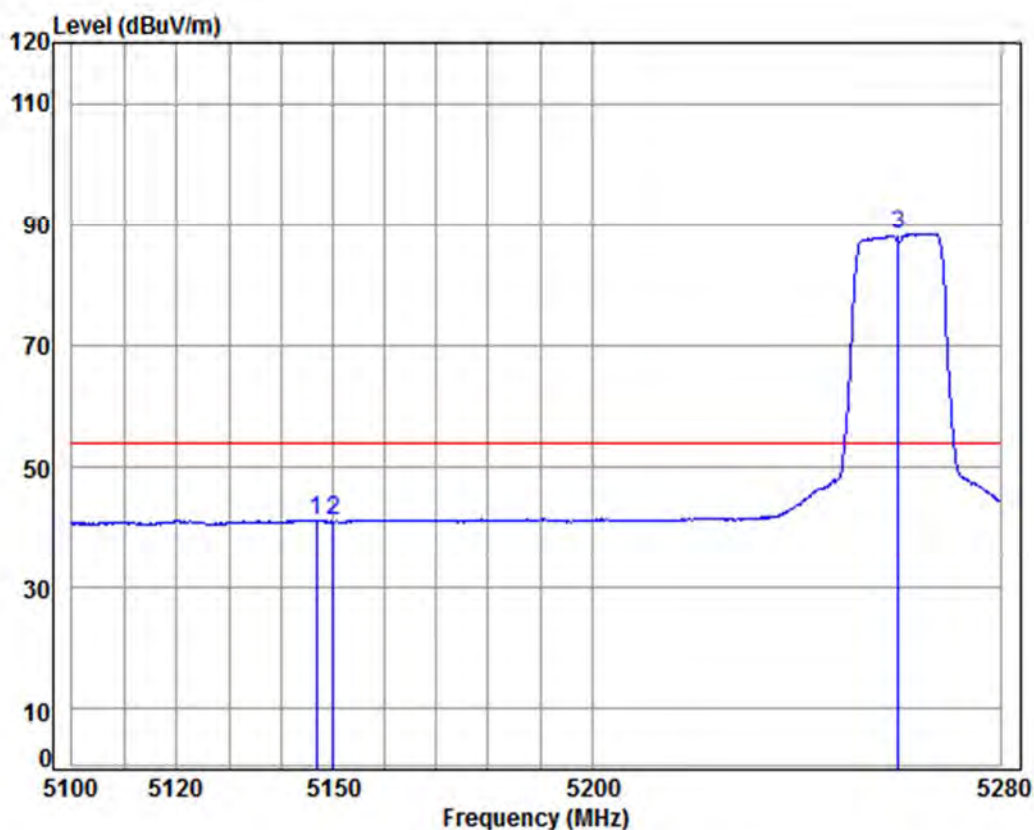

Condition: 3m VERTICAL
Job No : 09260RG
Mode : 5260 Band edge
: 5G WiFi 11A
: 12

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	5146.915	8.32	34.47	37.40	35.85	41.24	54.00	-12.76	Average
2	5150.000	8.33	34.47	37.40	35.70	41.10	54.00	-12.90	Average
3 pp	5260.000	8.49	34.45	37.47	82.97	88.44	54.00	34.44	Average




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM170800926003

Page: 263 of 411

Test mode:	802.11a	Frequency(MHz):	5260	Peak	Horizontal
------------	---------	-----------------	------	------	------------

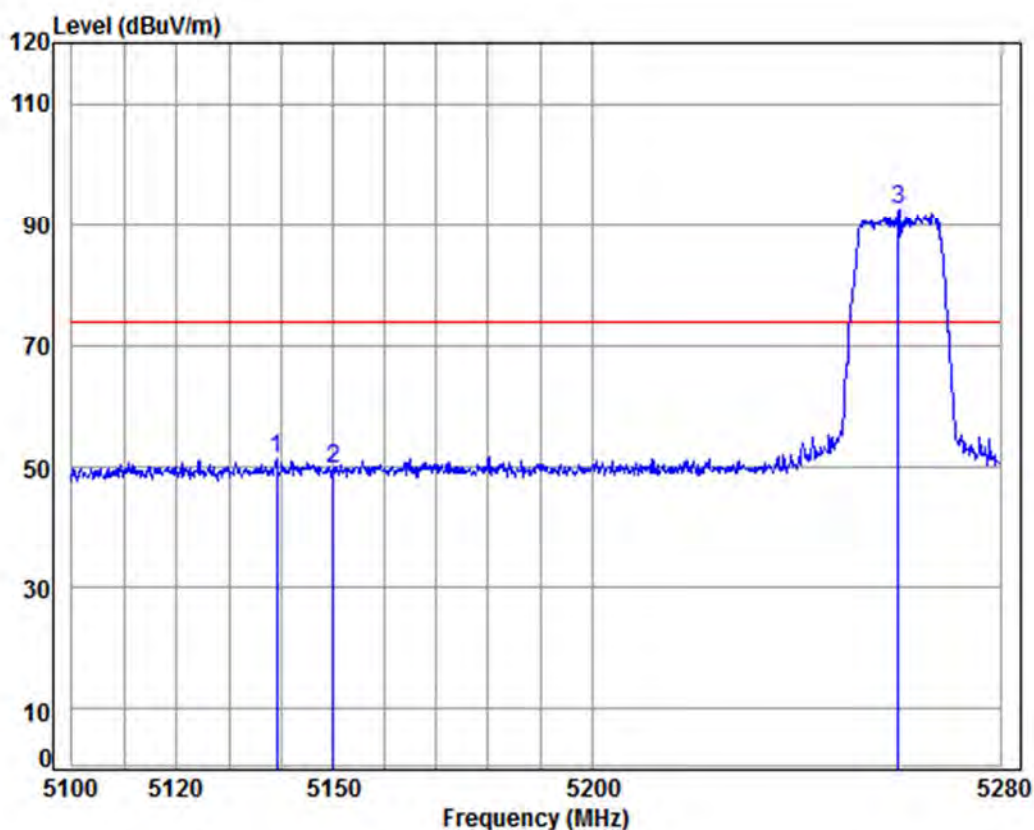

Condition: 3m HORIZONTAL
Job No : 09260RG
Mode : 5260 Band edge
: 5G WiFi 11A
: 12

	Freq	Cable	Ant	Preamp	Read	Limit	Over	
	MHz	Loss	Factor	Factor	Level	Line	Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1	5139.244	8.31	34.47	37.39	45.83	51.22	74.00	-22.78 peak
2	5150.000	8.33	34.47	37.40	44.23	49.63	74.00	-24.37 peak
3 pp	5260.000	8.49	34.45	37.47	87.00	92.47	74.00	18.47 peak




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM170800926003

Page: 264 of 411

Test mode:	802.11a	Frequency(MHz):	5260	Average	Horizontal
------------	---------	-----------------	------	---------	------------

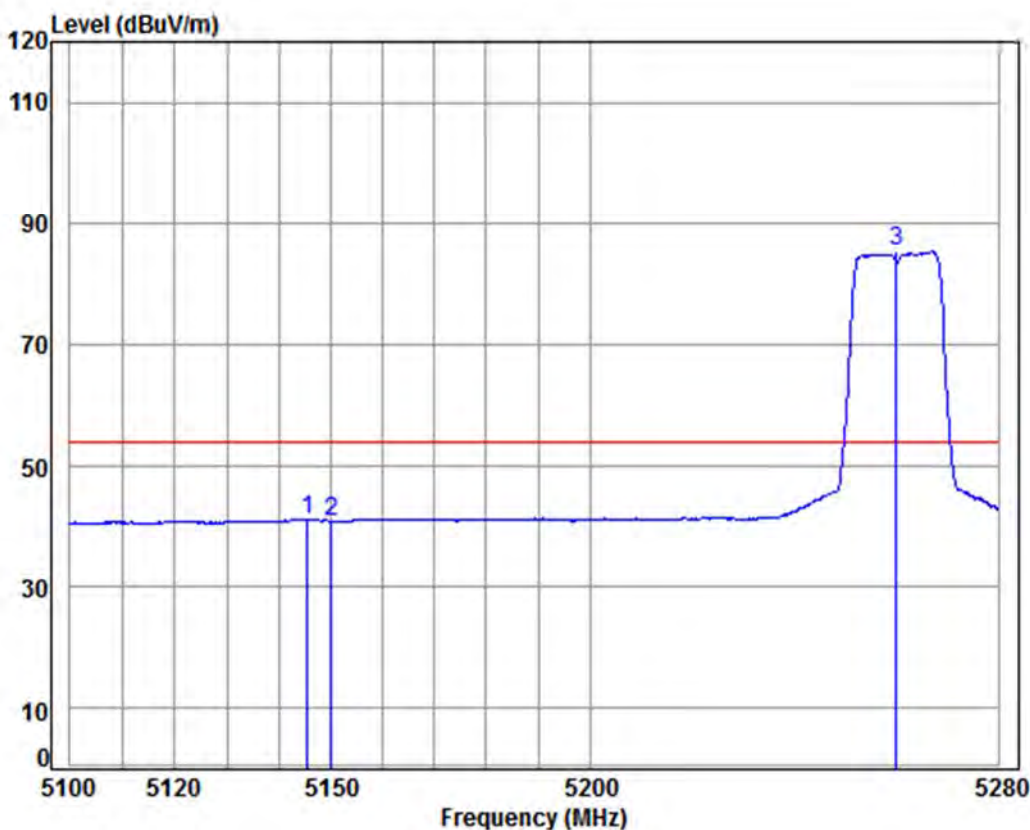

Condition: 3m HORIZONTAL
Job No : 09260RG
Mode : 5260 Band edge
: 5G WiFi 11A
: 12

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	5145.487	8.32	34.47	37.39	35.84	41.24	54.00	-12.76	Average
2	5150.000	8.33	34.47	37.40	35.59	40.99	54.00	-13.01	Average
3 pp	5260.000	8.49	34.45	37.47	79.73	85.20	54.00	31.20	Average




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM170800926003

Page: 265 of 411

Test mode:	802.11a	Frequency(MHz):	5320	Peak	Vertical
------------	---------	-----------------	------	------	----------

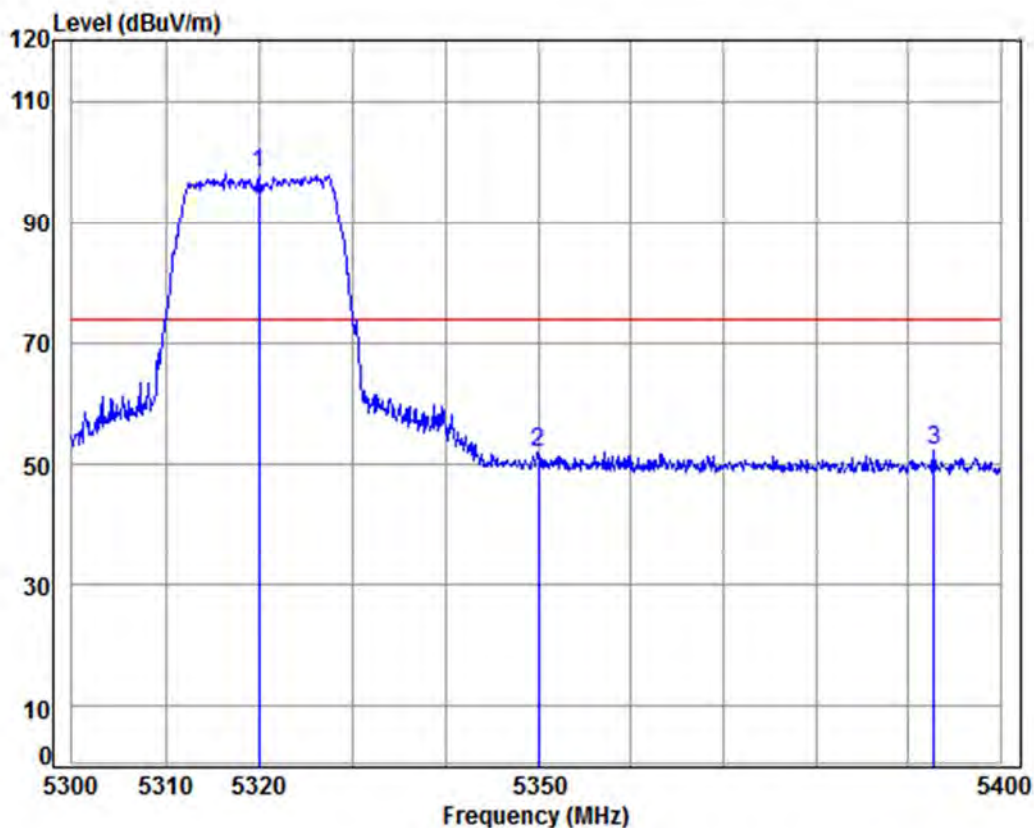

Condition: 3m VERTICAL
Job No : 09260RG
Mode : 5320 Band edge
: 5G WiFi 11A
: 12

		Cable	Ant	Preamp	Read	Limit	Over	
	Freq	Loss	Factor	Factor	Level	Line	Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1 pp	5320.000	8.58	34.43	37.50	92.51	98.02	74.00	24.02 Peak
2	5350.000	8.63	34.43	37.52	46.57	52.11	74.00	-21.89 Peak
3	5392.838	8.69	34.42	37.55	46.91	52.47	74.00	-21.53 Peak




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM170800926003

Page: 266 of 411

Test mode:	802.11a	Frequency(MHz):	5320	Average	Vertical
------------	---------	-----------------	------	---------	----------

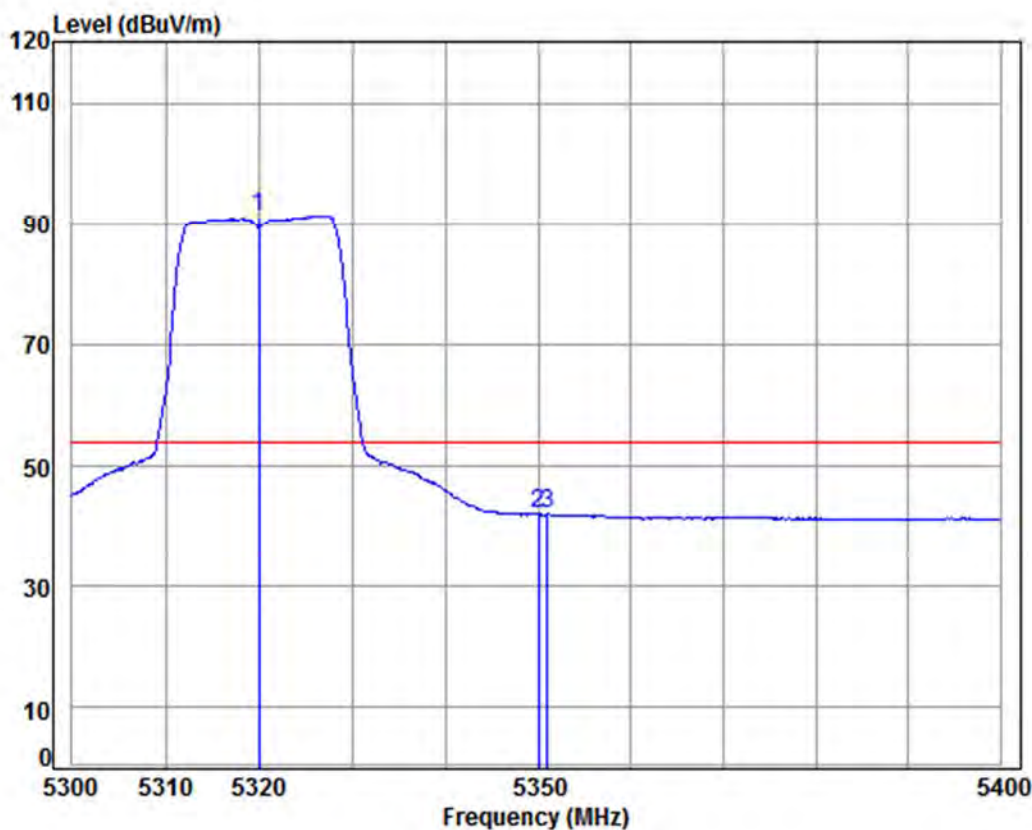

Condition: 3m VERTICAL
Job No : 09260RG
Mode : 5320 Band edge
: 5G WiFi 11A
: 12

		Cable	Ant	Preamp	Read	Limit	Over	
	Freq	Loss	Factor	Factor	Level	Line	Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1 pp	5320.000	8.58	34.43	37.50	85.87	91.38	54.00	37.38 Average
2	5350.000	8.63	34.43	37.52	36.63	42.17	54.00	-11.83 Average
3	5350.966	8.63	34.43	37.52	36.55	42.09	54.00	-11.91 Average




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM170800926003

Page: 267 of 411

Test mode:	802.11a	Frequency(MHz):	5320	Peak	Horizontal
------------	---------	-----------------	------	------	------------

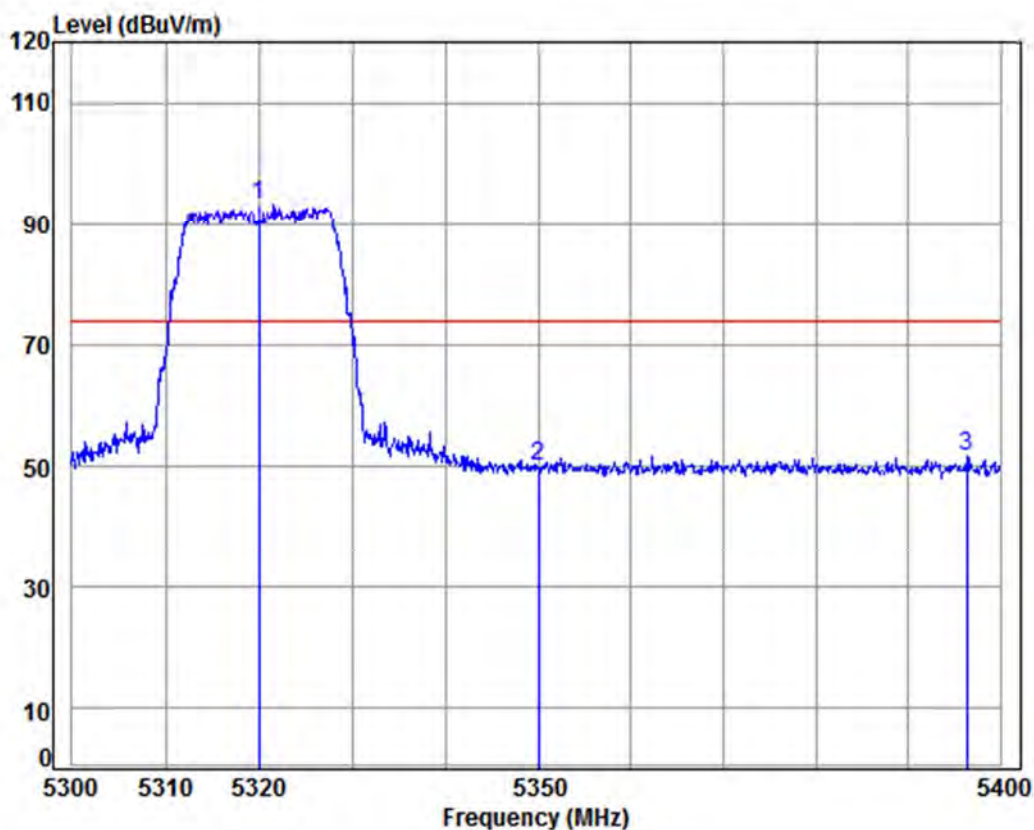

Condition: 3m HORIZONTAL
Job No : 09260RG
Mode : 5320 Band edge
: 5G WiFi 11A
: 12

		Cable	Ant	Preamp	Read	Limit	Over	
	Freq	Loss	Factor	Factor	Level	Line	Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1 pp	5320.000	8.58	34.43	37.50	87.74	93.25	74.00	19.25 peak
2	5350.000	8.63	34.43	37.52	44.33	49.87	74.00	-24.13 peak
3	5396.368	8.70	34.42	37.55	46.02	51.59	74.00	-22.41 peak




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM170800926003

Page: 268 of 411

Test mode:	802.11a	Frequency(MHz):	5320	Average	Horizontal
------------	---------	-----------------	------	---------	------------

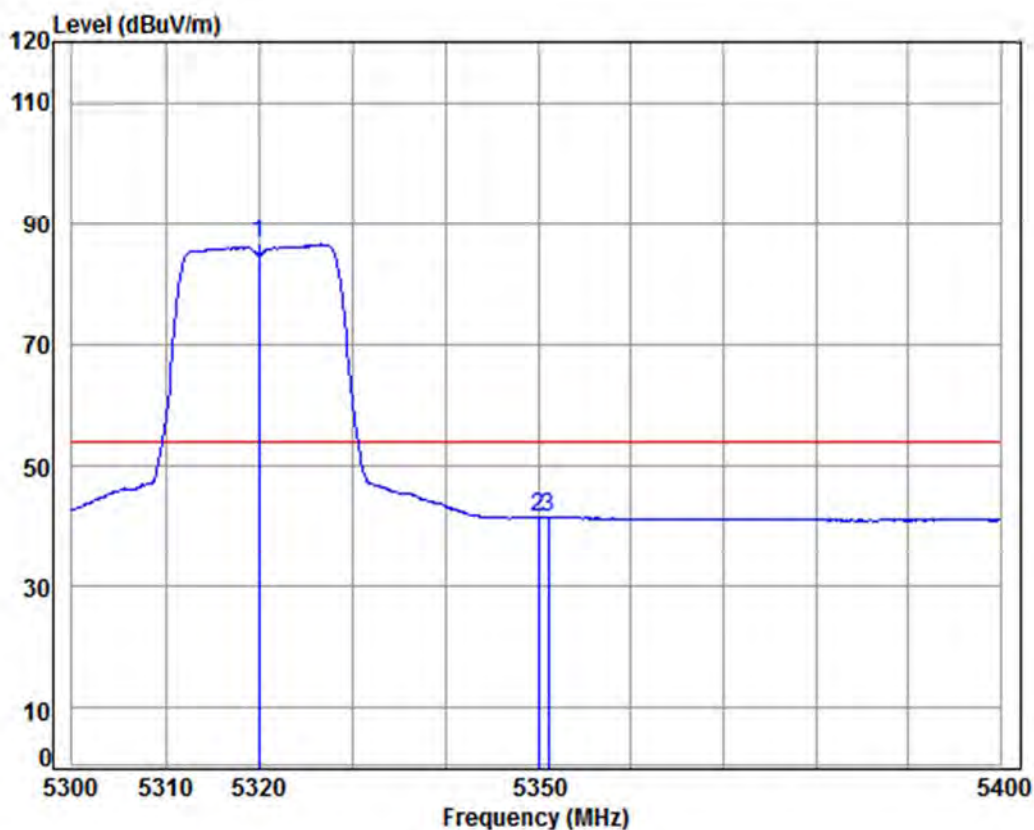

Condition: 3m HORIZONTAL
Job No : 09260RG
Mode : 5320 Band edge
: 5G WiFi 11A
: 12

		Cable	Ant	Preamp	Read	Limit	Over	
	Freq	Loss	Factor	Factor	Level	Line	Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1 pp	5320.000	8.58	34.43	37.50	81.01	86.52	54.00	32.52 Average
2	5350.000	8.63	34.43	37.52	36.12	41.66	54.00	-12.34 Average
3	5351.066	8.63	34.43	37.52	36.02	41.56	54.00	-12.44 Average




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM170800926003

Page: 269 of 411

Test mode:	802.11a	Frequency(MHz):	5500	Peak	Vertical
------------	---------	-----------------	------	------	----------

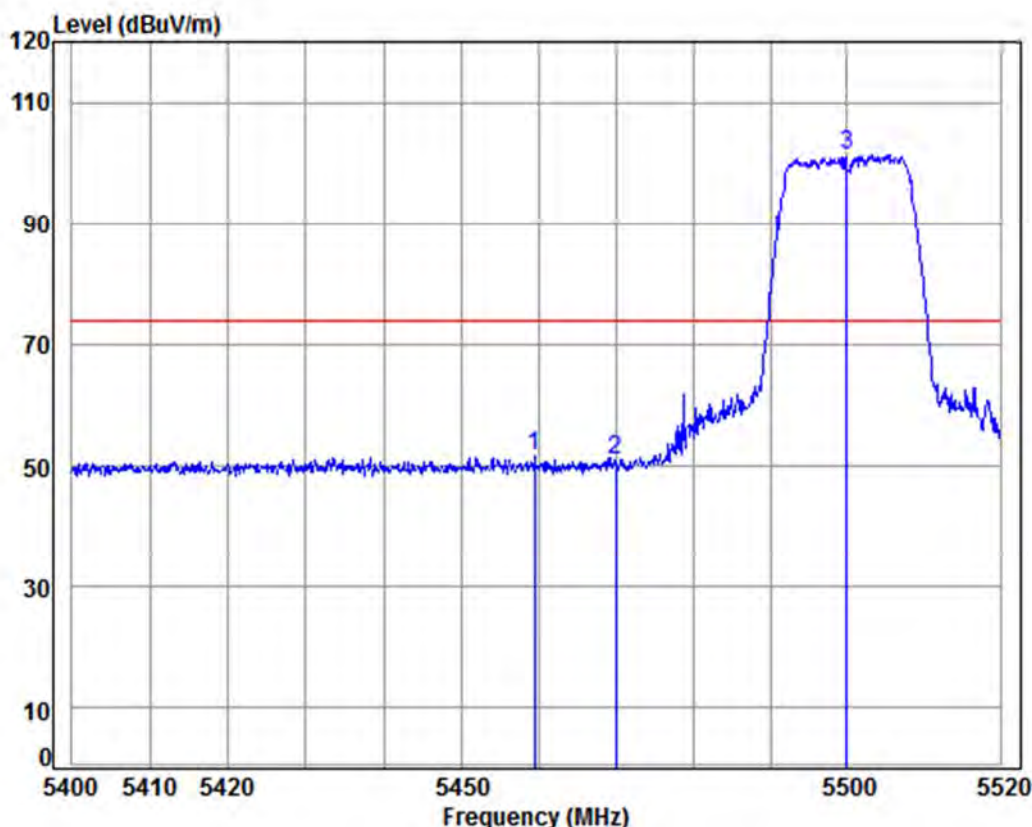

Condition: 3m VERTICAL
Job No : 09260RG
Mode : 5500 Band edge
: 5G WiFi 11A
: 12

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	5459.430	8.79	34.41	37.59	45.94	51.55	74.00	-22.45	Peak
2	5470.000	8.81	34.41	37.60	45.31	50.93	74.00	-23.07	Peak
3 pp	5500.000	8.85	34.40	37.61	95.87	101.51	74.00	27.51	Peak




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM170800926003

Page: 270 of 411

Test mode:	802.11a	Frequency(MHz):	5500	Average	Vertical
------------	---------	-----------------	------	---------	----------

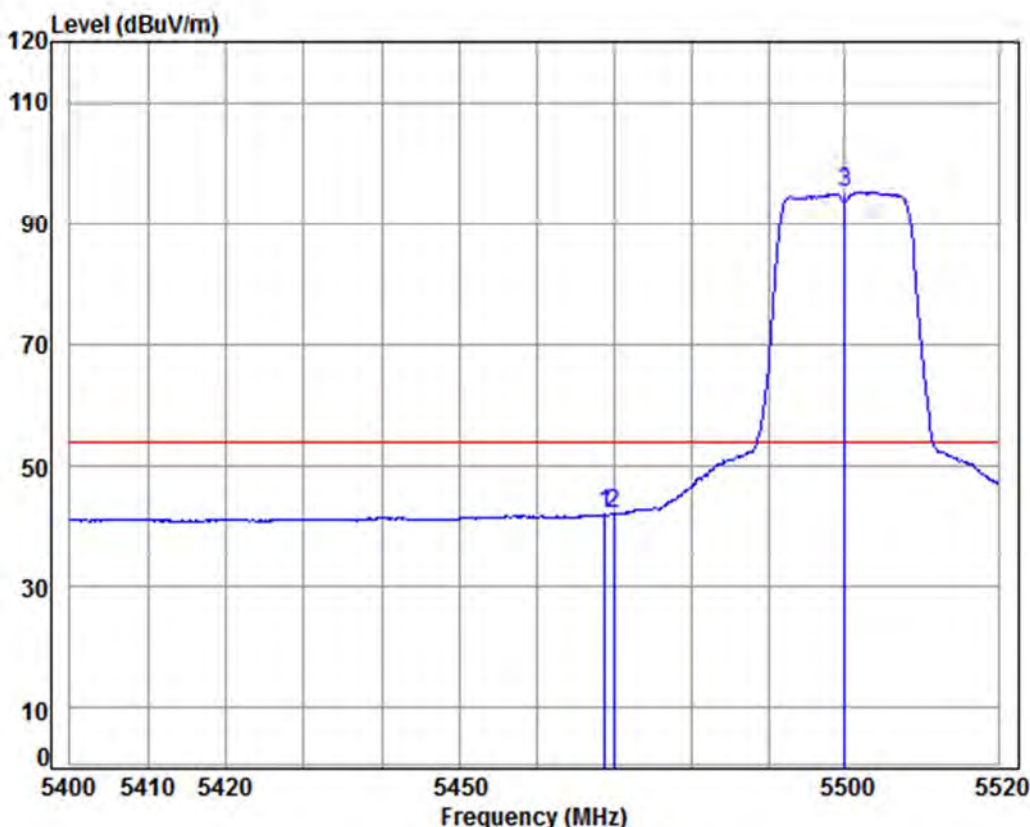

Condition: 3m VERTICAL
Job No : 09260RG
Mode : 5500 Band edge
: 5G WiFi 11A
: 12

	Freq	Cable Loss	Ant Factor	Preamplifier Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	5468.798	8.80	34.41	37.59	36.45	42.07	54.00	-11.93	Average
2	5470.000	8.81	34.41	37.60	36.45	42.07	54.00	-11.93	Average
3	pp 5500.000	8.85	34.40	37.61	89.52	95.16	54.00	41.16	Average




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM170800926003

Page: 271 of 411

Test mode:	802.11a	Frequency(MHz):	5500	Peak	Horizontal
------------	---------	-----------------	------	------	------------

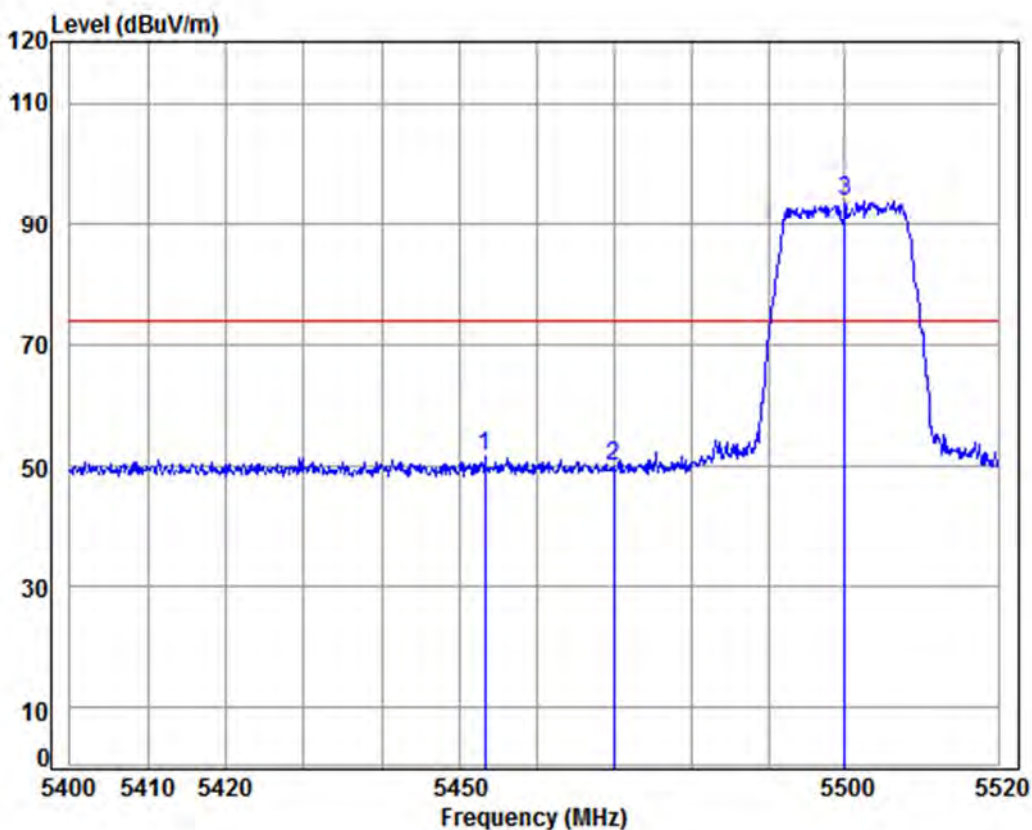

Condition: 3m HORIZONTAL
Job No : 09260RG
Mode : 5500 Band edge
: 5G WiFi 11A
: 12

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	5453.314	8.78	34.41	37.59	46.17	51.77	74.00	-22.23	peak
2	5470.000	8.81	34.41	37.60	44.36	49.98	74.00	-24.02	peak
3 pp	5500.000	8.85	34.40	37.61	88.16	93.80	74.00	19.80	peak




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM170800926003

Page: 272 of 411

Test mode:	802.11a	Frequency(MHz):	5500	Average	Horizontal
------------	---------	-----------------	------	---------	------------

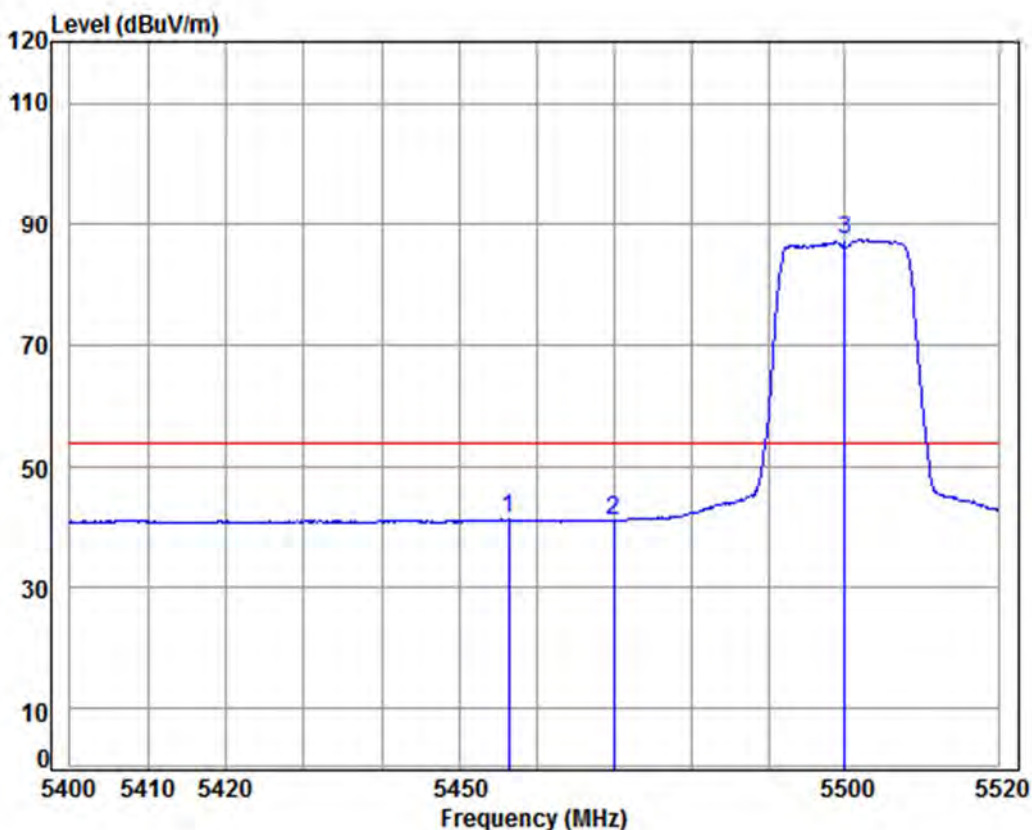

Condition: 3m HORIZONTAL
Job No : 09260RG
Mode : 5500 Band edge
: 5G WiFi 11A
: 12

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	5456.431	8.79	34.41	37.59	35.77	41.38	54.00	-12.62	Average
2	5470.000	8.81	34.41	37.60	35.67	41.29	54.00	-12.71	Average
3	pp 5500.000	8.85	34.40	37.61	81.63	87.27	54.00	33.27	Average




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM170800926003

Page: 273 of 411

Test mode:	802.11a	Frequency(MHz):	5700	Peak	Vertical
------------	---------	-----------------	------	------	----------

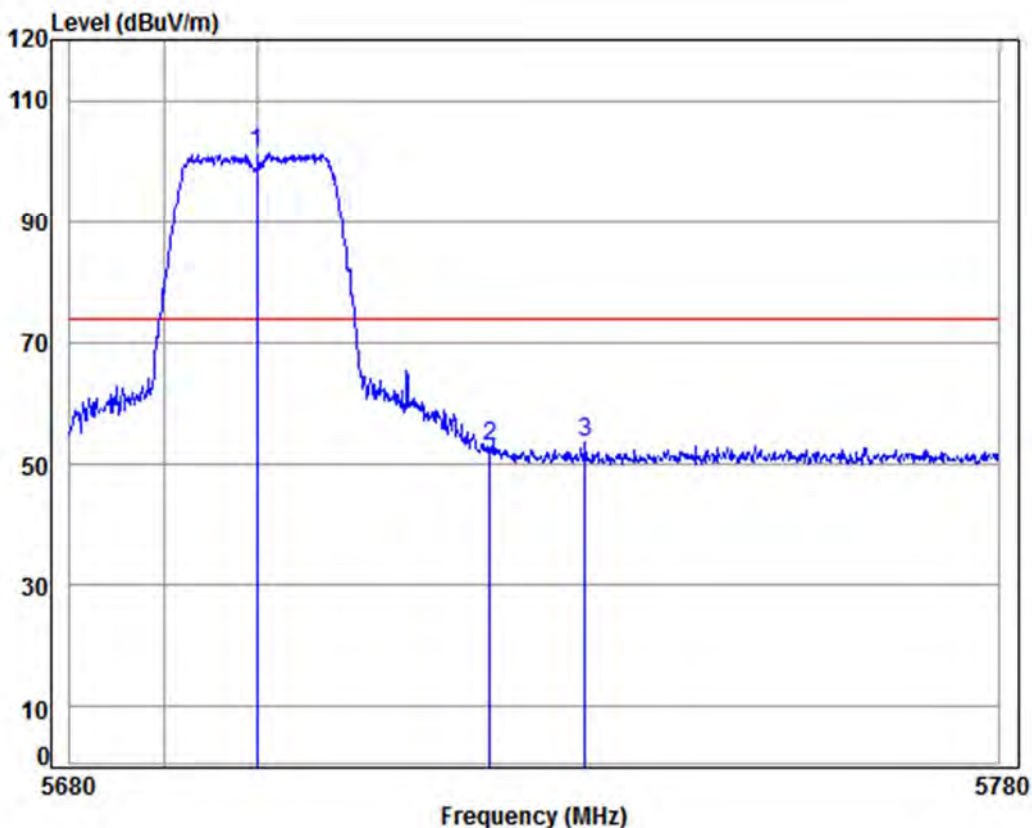

Condition: 3m VERTICAL
Job No : 09260RG
Mode : 5700 Band edge
: 5G WiFi 11A
: 12

		Cable	Ant	Preamp	Read	Limit	Over	
	Freq	Loss	Factor	Factor	Level	Line	Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1 pp	5700.000	9.56	34.52	37.73	94.88	101.23	74.00	27.23 Peak
2	5725.000	9.64	34.54	37.75	46.50	52.93	74.00	-21.07 Peak
3	5735.284	9.68	34.54	37.75	47.00	53.47	74.00	-20.53 Peak




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM170800926003

Page: 274 of 411

Test mode:	802.11a	Frequency(MHz):	5700	Average	Vertical
------------	---------	-----------------	------	---------	----------

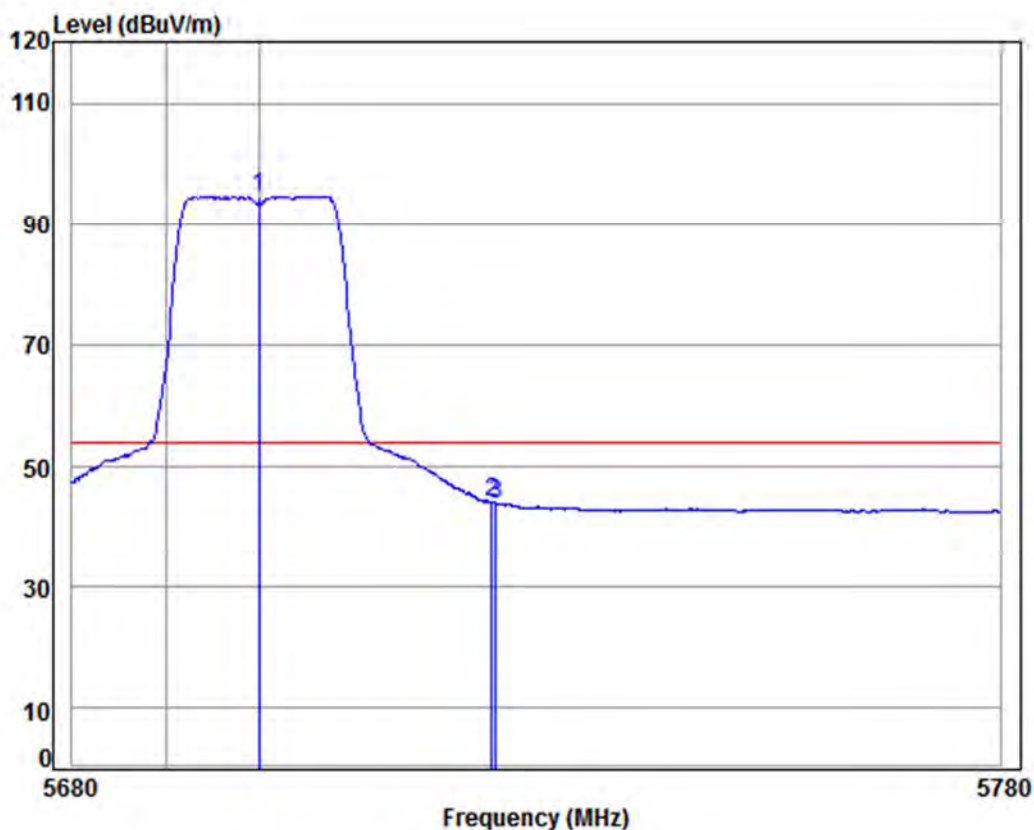

Condition: 3m VERTICAL
Job No : 09260RG
Mode : 5700 Band edge
: 5G WiFi 11A
: 12

		Cable	Ant	Preamp	Read	Limit	Over	
	Freq	Loss	Factor	Factor	Level	Line	Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1 pp	5700.000	9.56	34.52	37.73	88.25	94.60	54.00	40.60 Average
2	5725.000	9.64	34.54	37.75	37.85	44.28	54.00	-9.72 Average
3	5725.483	9.64	34.54	37.75	37.50	43.93	54.00	-10.07 Average




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM170800926003

Page: 275 of 411

Test mode:	802.11a	Frequency(MHz):	5700	Peak	Horizontal
------------	---------	-----------------	------	------	------------

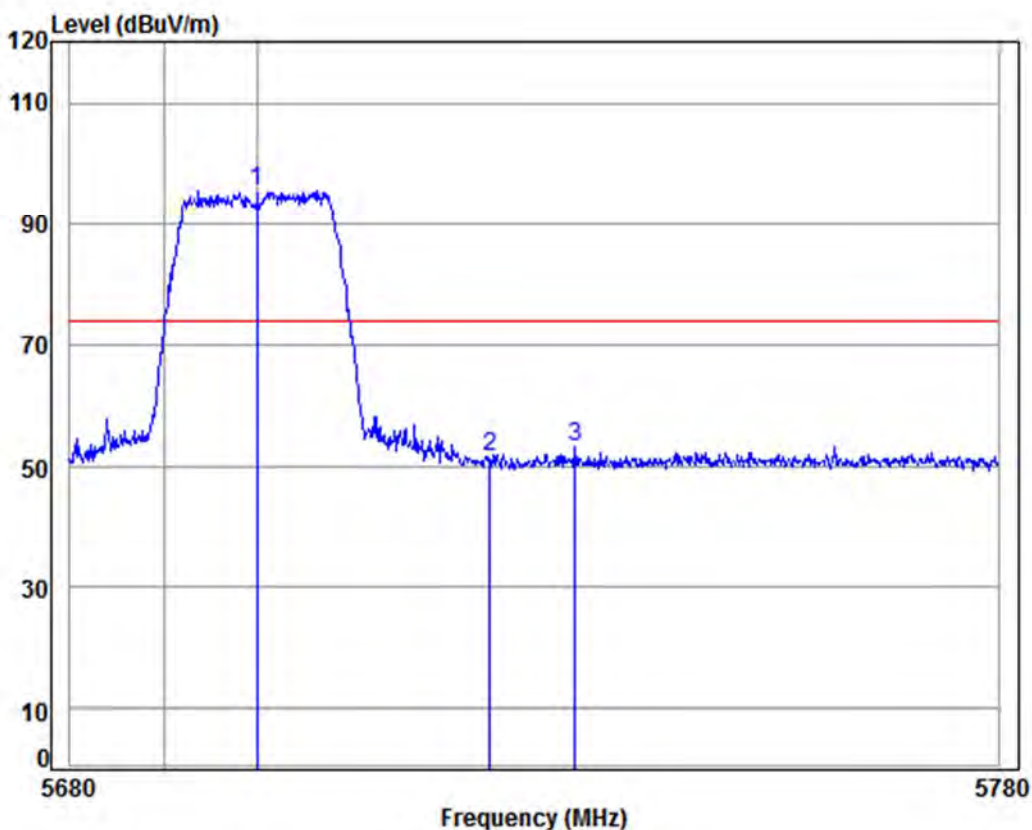

Condition: 3m HORIZONTAL
Job No : 09260RG
Mode : 5700 Band edge
: 5G WiFi 11A
: 12

		Cable	Ant	Preamp	Read	Limit	Over	
	Freq	Loss	Factor	Factor	Level	Line	Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1 pp	5700.000	9.56	34.52	37.73	89.16	95.51	74.00	21.51 peak
2	5725.000	9.64	34.54	37.75	45.09	51.52	74.00	-22.48 peak
3	5734.184	9.67	34.54	37.75	46.75	53.21	74.00	-20.79 peak




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM170800926003

Page: 276 of 411

Test mode:	802.11a	Frequency(MHz):	5700	Average	Horizontal
------------	---------	-----------------	------	---------	------------

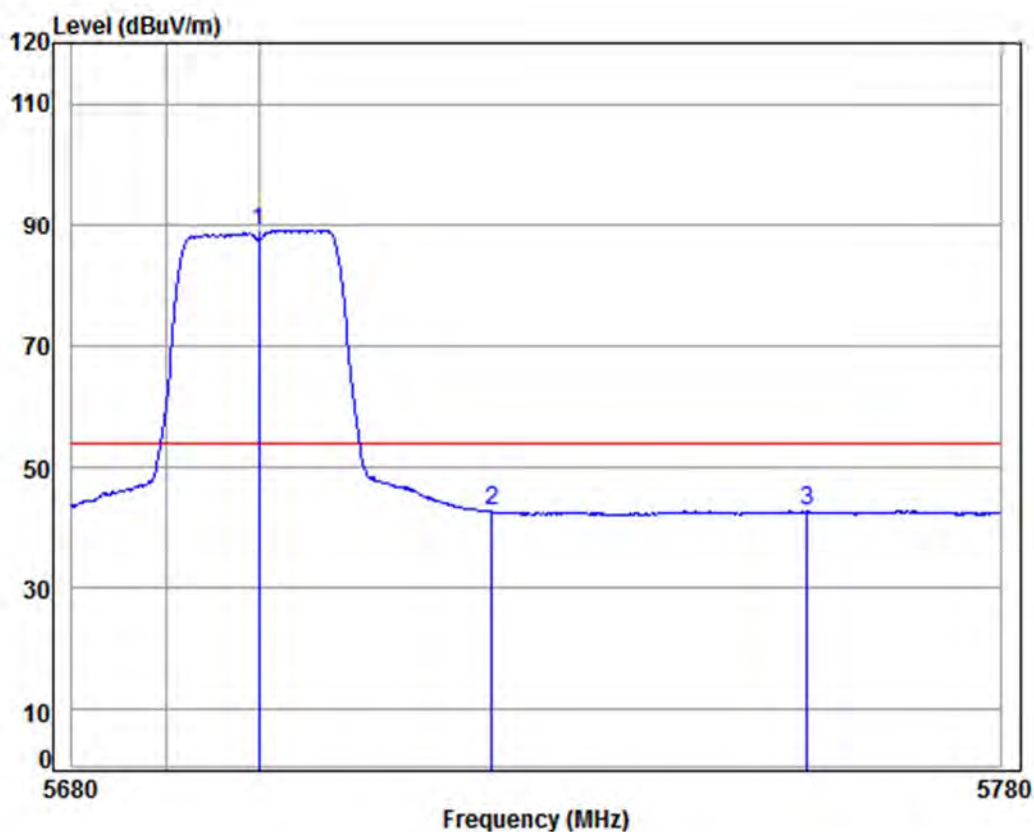

Condition: 3m HORIZONTAL
Job No : 09260RG
Mode : 5700 Band edge
: 5G WiFi 11A
: 12

		Cable	Ant	Preamp	Read	Limit	Over	
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1	pp 5700.000	9.56	34.52	37.73	82.62	88.97	54.00	34.97 Average
2	5725.000	9.64	34.54	37.75	36.38	42.81	54.00	-11.19 Average
3	5759.056	9.76	34.56	37.77	36.15	42.70	54.00	-11.30 Average




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM170800926003

Page: 277 of 411

Test mode:	802.11a	Frequency(MHz):	5745	Peak	Vertical
------------	---------	-----------------	------	------	----------

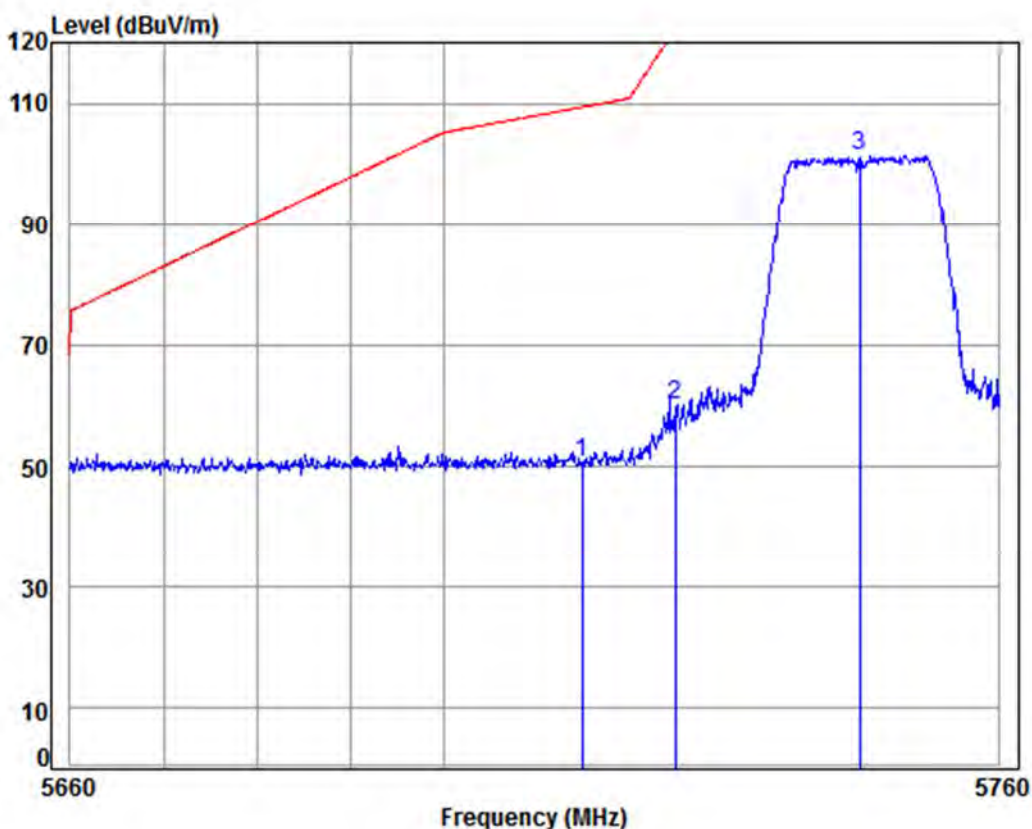

Condition: 3m VERTICAL
Job No : 09260RG
Mode : 5745 Band edge
: 5G WiFi 11A

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	5715.000	9.61	34.53	37.74	44.14	50.54	109.40	-58.86	peak
2	5725.000	9.64	34.54	37.75	53.80	60.23	122.20	-61.97	peak
3 pp	5745.000	9.71	34.55	37.76	94.92	101.42	125.20	-23.78	peak




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM170800926003

Page: 278 of 411

Test mode:	802.11a	Frequency(MHz):	5745	Peak	Horizontal
------------	---------	-----------------	------	------	------------

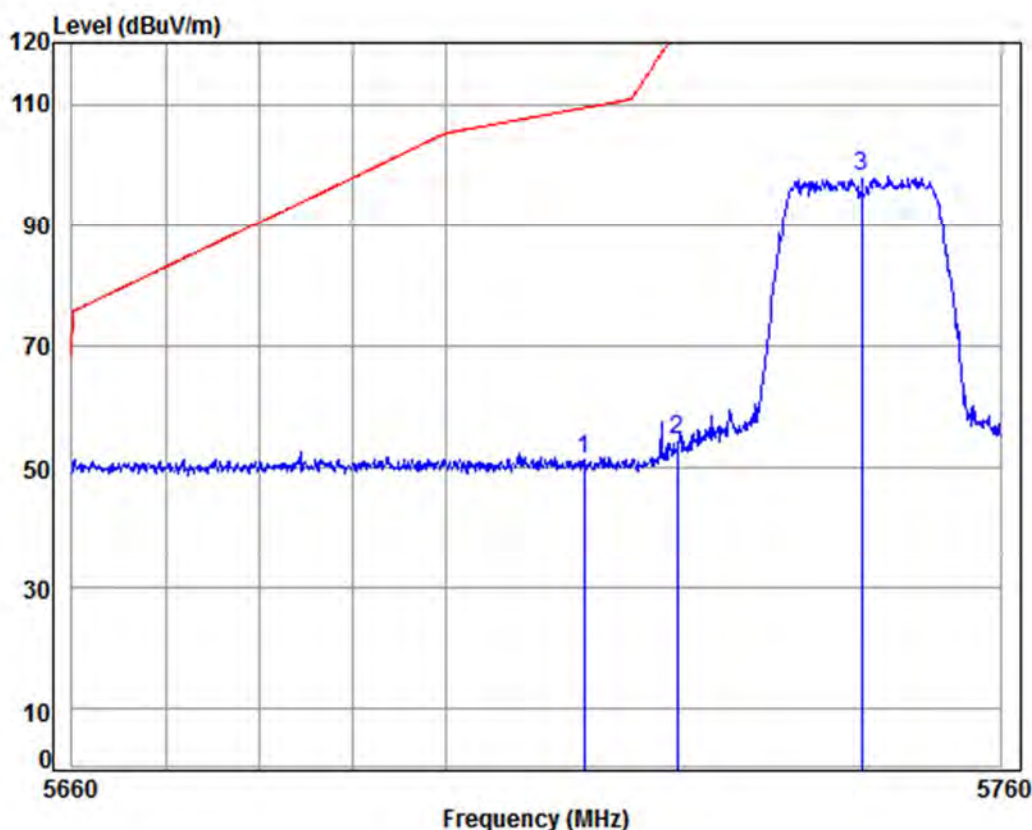

Condition: 3m HORIZONTAL

Job No : 09260RG

Mode : 5745 Band edge

: 5G WiFi 11A

		Cable	Ant	Preamp	Read	Limit	Over	
	Freq	Loss	Factor	Factor	Level	Level	Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1	5715.000	9.61	34.53	37.74	44.98	51.38	109.40	-58.02 peak
2	5725.000	9.64	34.54	37.75	48.16	54.59	122.20	-67.61 peak
3 pp	5745.000	9.71	34.55	37.76	91.58	98.08	125.20	-27.12 peak




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM170800926003

Page: 279 of 411

Test mode:	802.11a	Frequency(MHz):	5825	Peak	Vertical
------------	---------	-----------------	------	------	----------

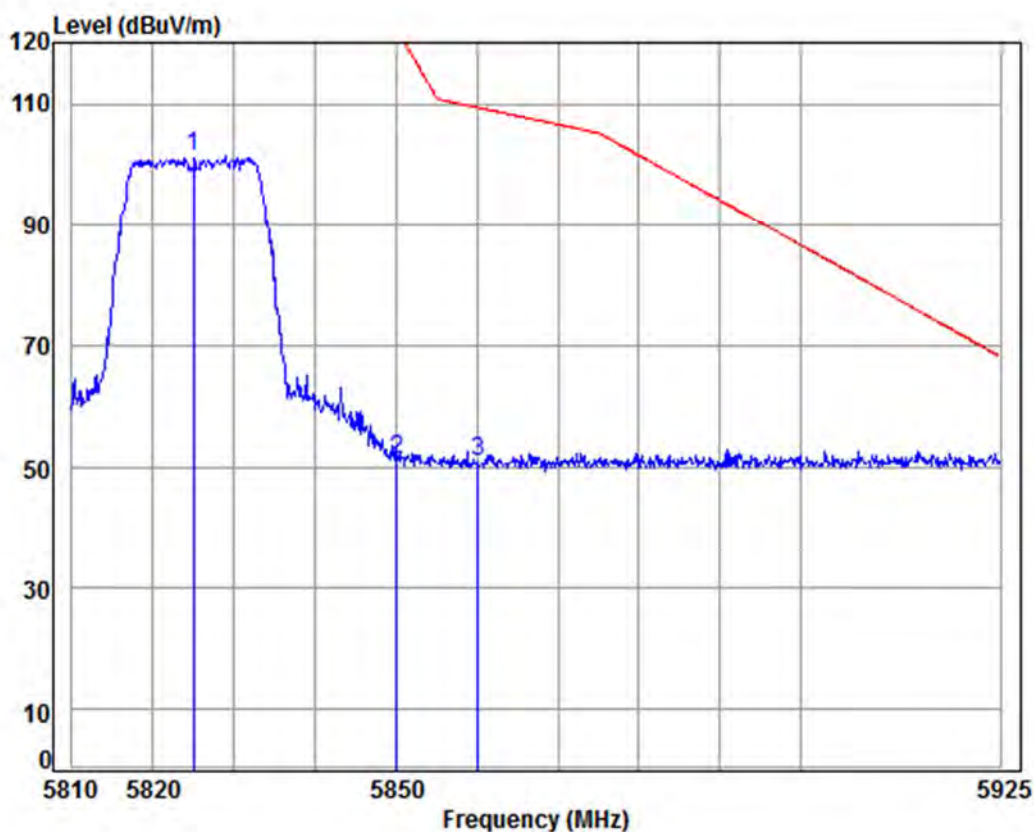

Condition: 3m VERTICAL

Job No : 09260RG

Mode : 5825 Band edge

: 5G WiFi 11A

		Cable	Ant	Preamp	Read	Limit	Over		
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	pp 5825.000	9.98	34.60	37.80	94.54	101.32	125.20	-23.88	peak
2	5850.000	10.07	34.61	37.82	44.53	51.39	122.20	-70.81	peak
3	5860.000	10.10	34.62	37.82	44.12	51.02	109.40	-58.38	peak




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM170800926003

Page: 280 of 411

Test mode:	802.11a	Frequency(MHz):	5825	Peak	Horizontal
------------	---------	-----------------	------	------	------------

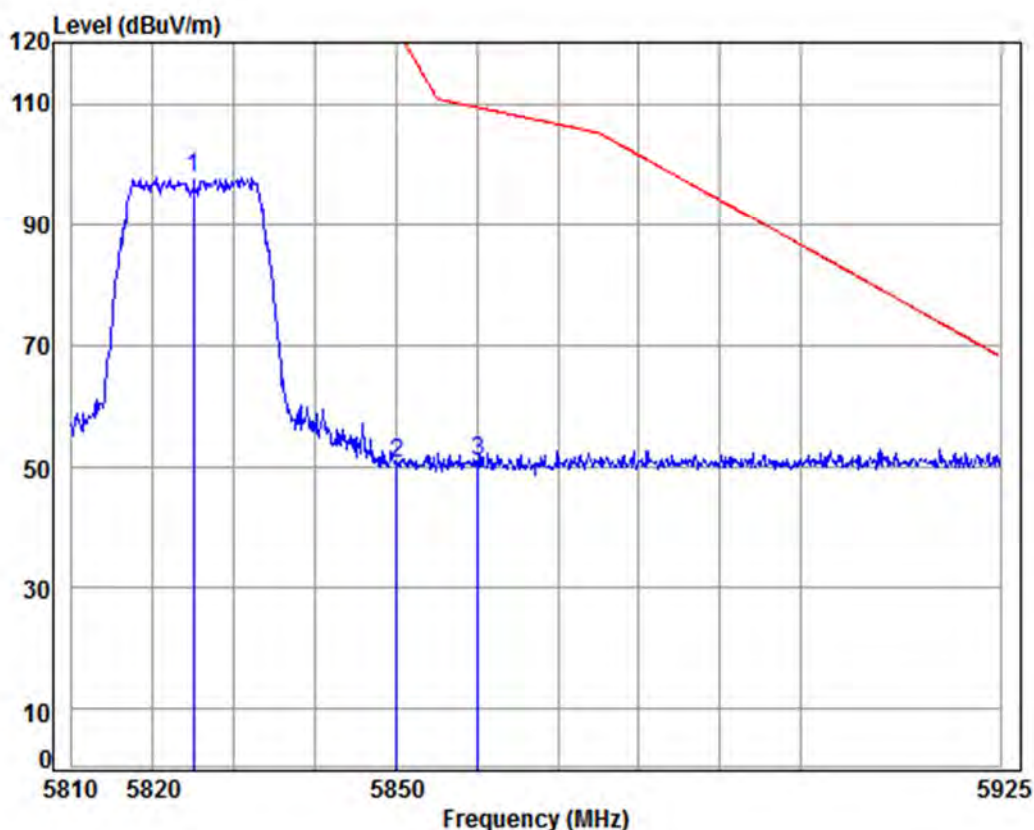

Condition: 3m HORIZONTAL

Job No : 09260RG

Mode : 5825 Band edge

: 5G WiFi 11A

		Cable	Ant	Preamp	Read	Limit	Over		
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	pp 5825.000	9.98	34.60	37.80	91.03	97.81	125.20	-27.39	peak
2	5850.000	10.07	34.61	37.82	43.97	50.83	122.20	-71.37	peak
3	5860.000	10.10	34.62	37.82	43.99	50.89	109.40	-58.51	peak




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM170800926003

Page: 281 of 411

Test mode:	802.11n(HT20)	Frequency(MHz):	5180	Peak	Vertical
------------	---------------	-----------------	------	------	----------

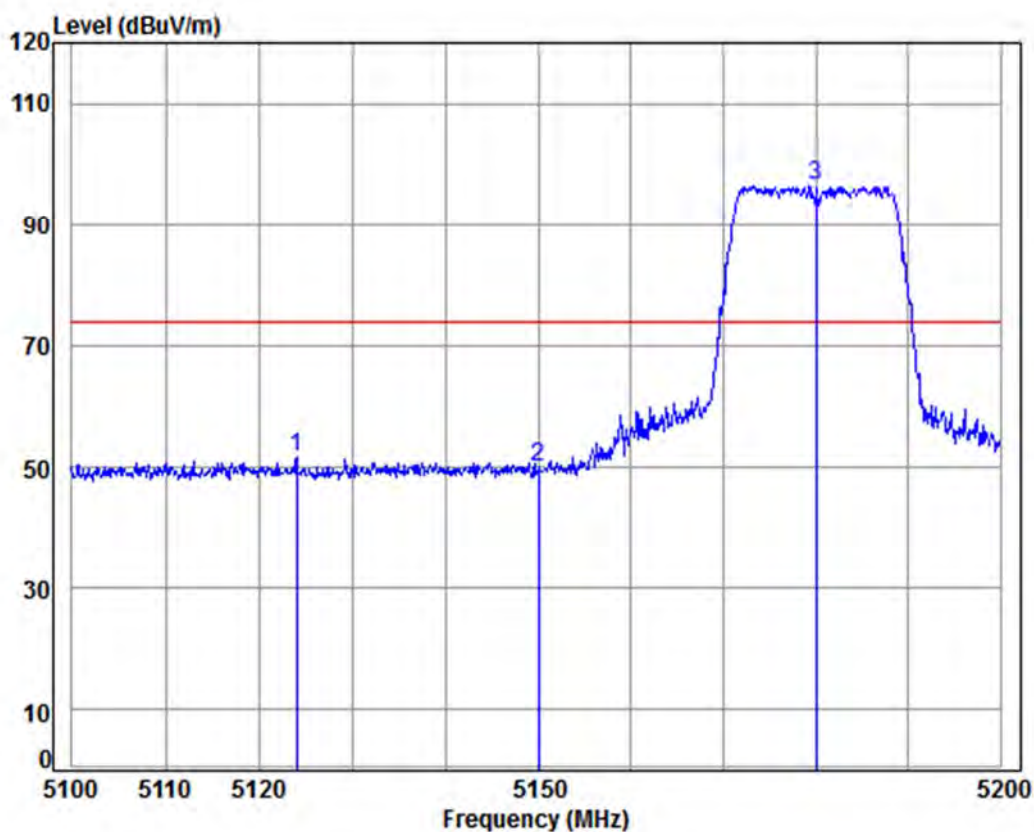

Condition: 3m VERTICAL

Job No : 09260RG

Mode : 5180 Band edge

: 5G WiFi 11N20

: 12

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit	Over	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	5124.022	8.29	34.47	37.38	46.17	51.55	74.00	-22.45	Peak
2	5150.000	8.33	34.47	37.40	44.47	49.87	74.00	-24.13	Peak
3 pp	5180.000	8.37	34.46	37.42	91.18	96.59	74.00	22.59	Peak




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM170800926003

Page: 282 of 411

Test mode:	802.11n(HT20)	Frequency(MHz):	5180	Average	Vertical
------------	---------------	-----------------	------	---------	----------

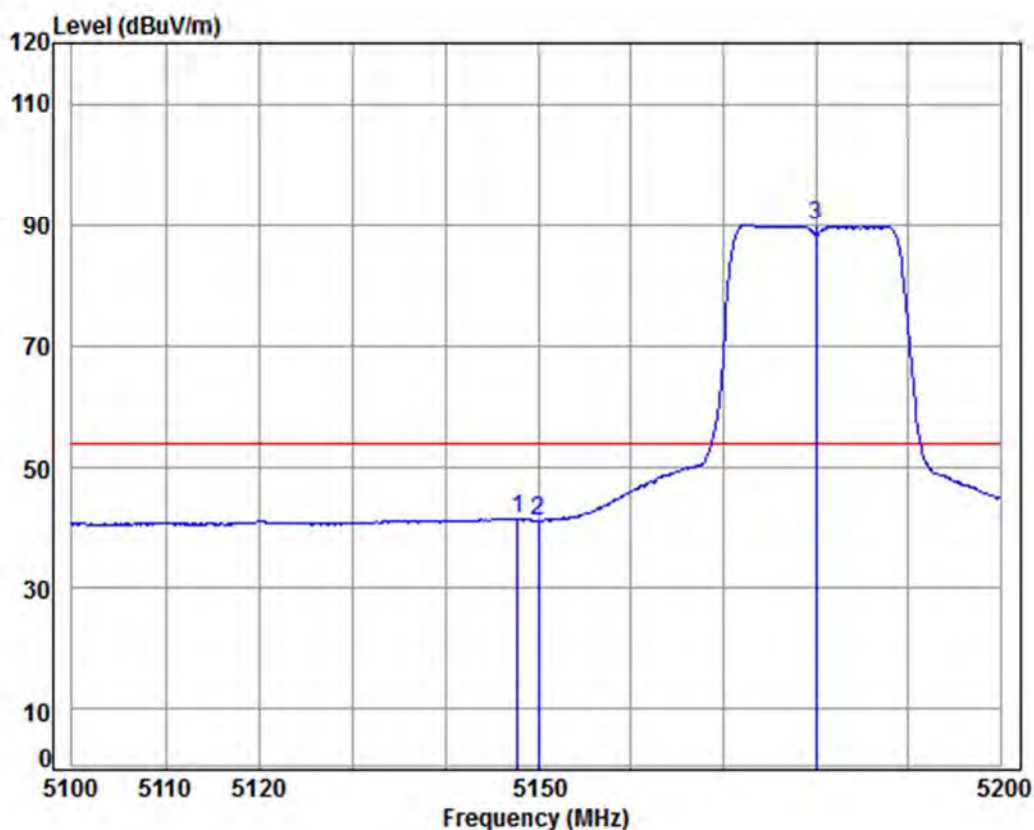

Condition: 3m VERTICAL

Job No : 09260RG

Mode : 5180 Band edge

: 5G WiFi 11N20

: 12

		Cable	Ant	Preamp	Read	Limit	Over	
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1	5147.758	8.32	34.47	37.40	36.19	41.58	54.00	-12.42 Average
2	5150.000	8.33	34.47	37.40	35.93	41.33	54.00	-12.67 Average
3	pp 5180.000	8.37	34.46	37.42	84.49	89.90	54.00	35.90 Average




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM170800926003

Page: 283 of 411

Test mode:	802.11n(HT20)	Frequency(MHz):	5180	Peak	Horizontal
------------	---------------	-----------------	------	------	------------

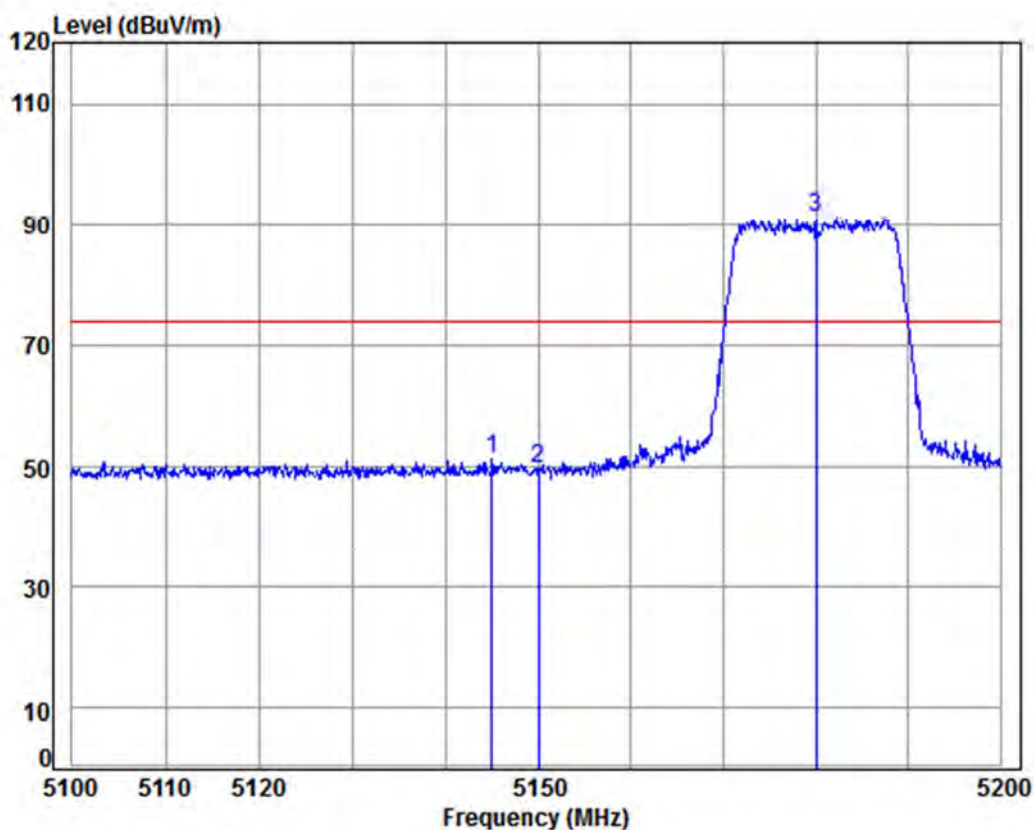

Condition: 3m HORIZONTAL
Job No : 09260RG
Mode : 5180 Band edge
: 5G WiFi 11N20
: 12

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	5145.060	8.32	34.47	37.39	45.95	51.35	74.00	-22.65	peak
2	5150.000	8.33	34.47	37.40	44.29	49.69	74.00	-24.31	peak
3 pp	5180.000	8.37	34.46	37.42	85.70	91.11	74.00	17.11	peak




SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch

Report No.: SZEM170800926003

Page: 284 of 411

Test mode:	802.11n(HT20)	Frequency(MHz):	5180	Average	Horizontal
------------	---------------	-----------------	------	---------	------------

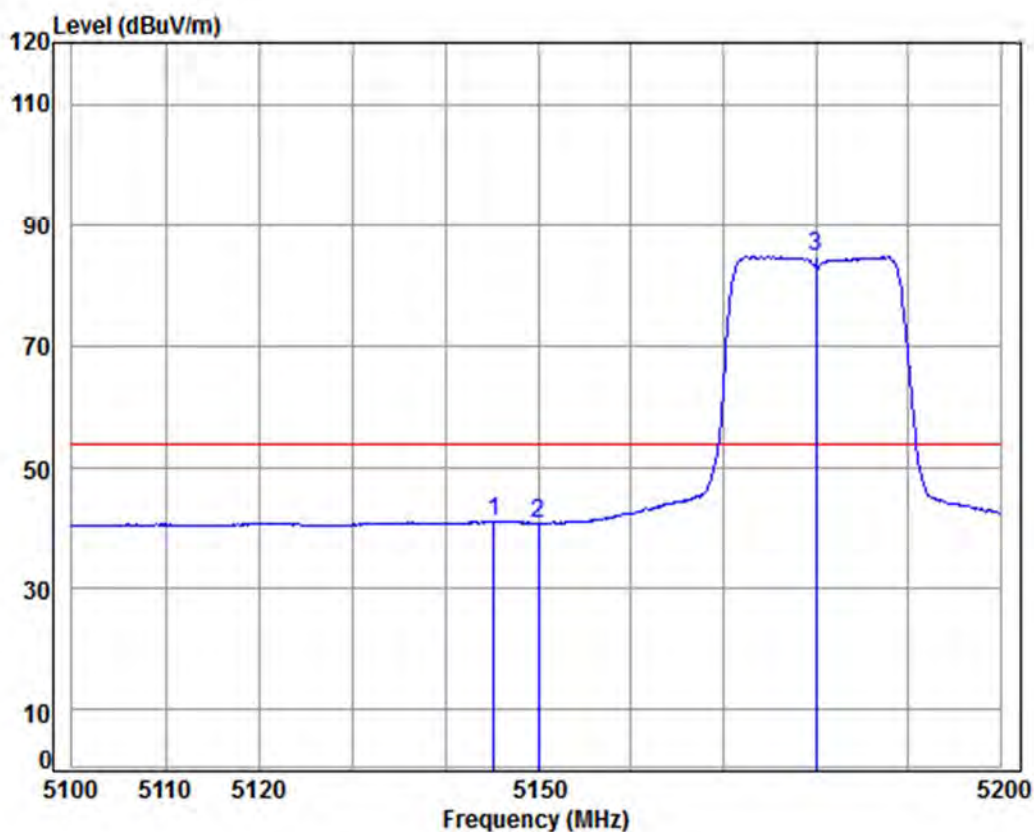

Condition: 3m HORIZONTAL
Job No : 09260RG
Mode : 5180 Band edge
: 5G WiFi 11N20
: 12

		Cable	Ant	Preamp	Read	Limit	Over	
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1	5145.259	8.32	34.47	37.39	35.80	41.20	54.00	-12.80 Average
2	5150.000	8.33	34.47	37.40	35.57	40.97	54.00	-13.03 Average
3 pp	5180.000	8.37	34.46	37.42	79.24	84.65	54.00	30.65 Average




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM170800926003

Page: 285 of 411

Test mode:	802.11n(HT20)	Frequency(MHz):	5240	Peak	Vertical
------------	---------------	-----------------	------	------	----------

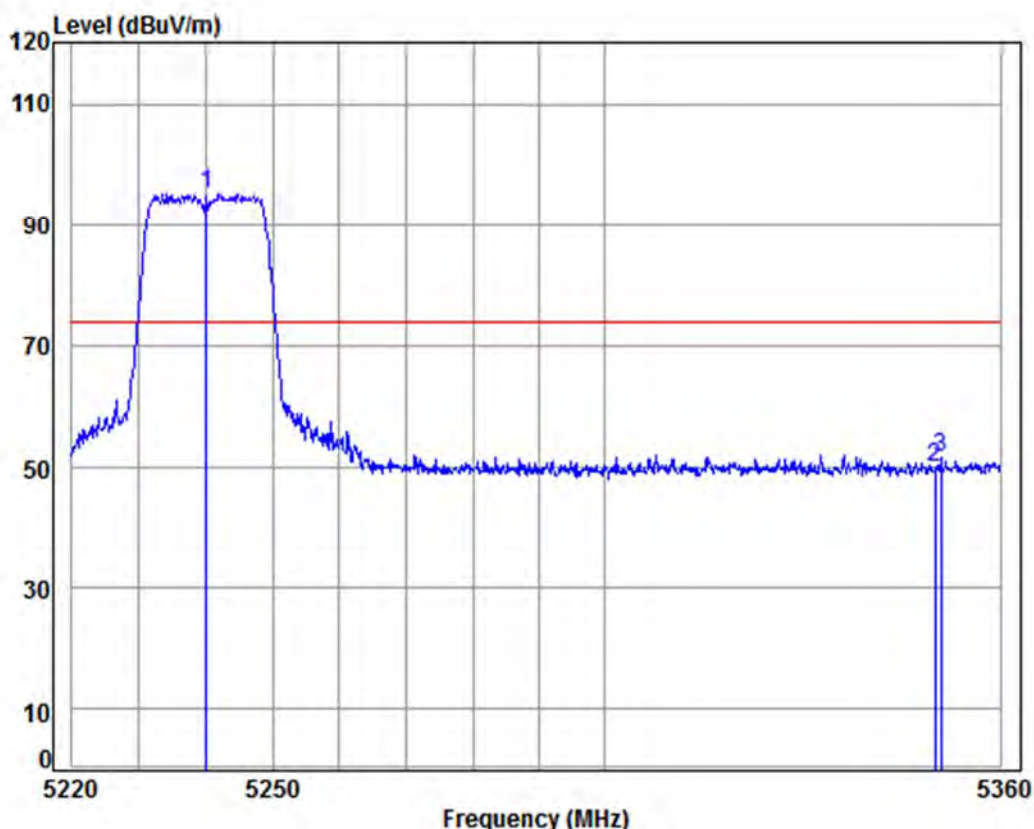

Condition: 3m VERTICAL
Job No : 09260RG
Mode : 5240 Band edge
: 5G WiFi 11N20
: 12

		Cable	Ant	Preamp	Read	Limit	Over	
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1	pp 5240.000	8.46	34.45	37.45	89.67	95.13	74.00	21.13 Peak
2	5350.000	8.63	34.43	37.52	44.52	50.06	74.00	-23.94 Peak
3	5350.929	8.63	34.43	37.52	45.97	51.51	74.00	-22.49 Peak




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM170800926003

Page: 286 of 411

Test mode:	802.11n(HT20)	Frequency(MHz):	5240	Average	Vertical
------------	---------------	-----------------	------	---------	----------

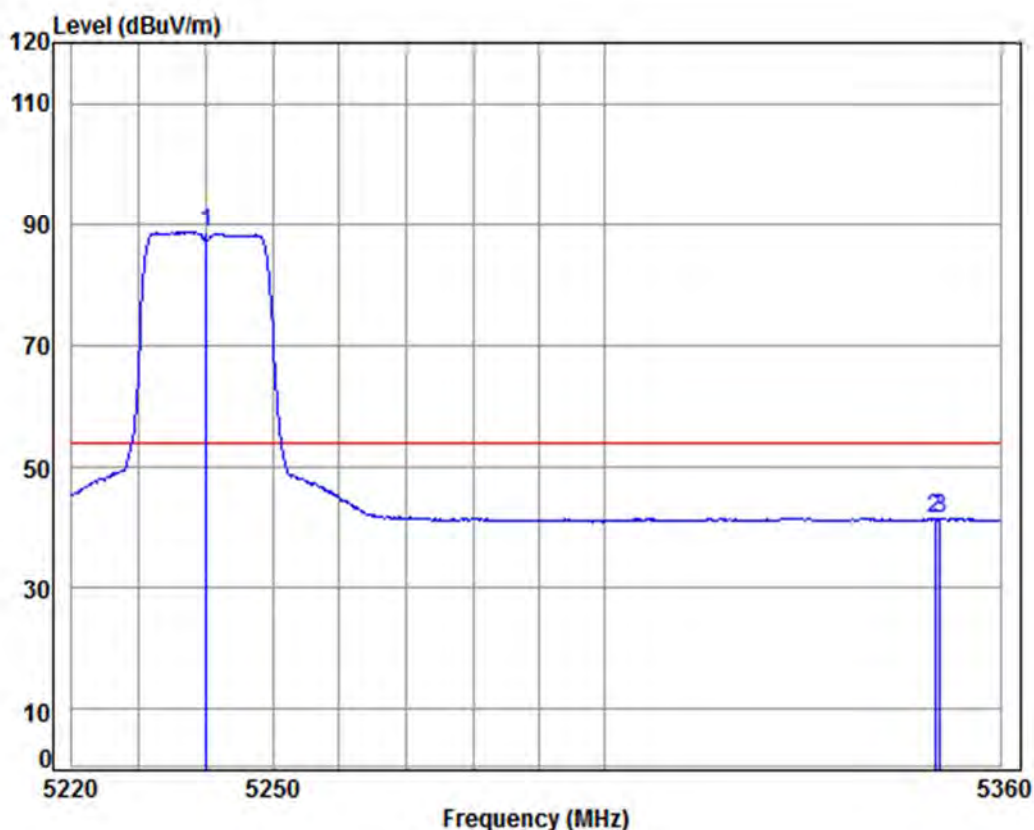

Condition: 3m VERTICAL

Job No : 09260RG

Mode : 5240 Band edge

: 5G WiFi 11N20

: 12

		Cable	Ant	Preamp	Read	Limit	Over	
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1	pp 5240.000	8.46	34.45	37.45	83.12	88.58	54.00	34.58 Average
2	5350.000	8.63	34.43	37.52	36.00	41.54	54.00	-12.46 Average
3	5350.787	8.63	34.43	37.52	35.96	41.50	54.00	-12.50 Average




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM170800926003

Page: 287 of 411

Test mode:	802.11n(HT20)	Frequency(MHz):	5240	Peak	Horizontal
------------	---------------	-----------------	------	------	------------

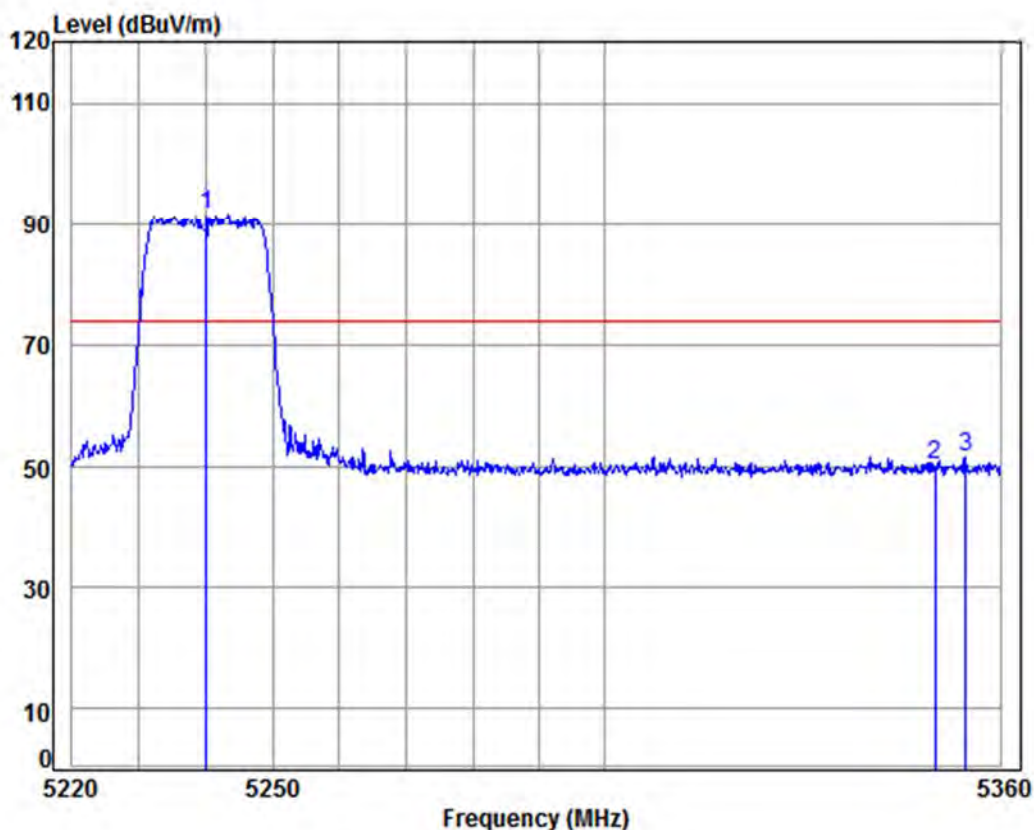

Condition: 3m HORIZONTAL
Job No : 09260RG
Mode : 5240 Band edge
: 5G WiFi 11N20
: 12

		Cable	Ant	Preamp	Read	Limit	Over	
	Freq	Loss	Factor	Factor	Level	Line	Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1	pp 5240.000	8.46	34.45	37.45	85.95	91.41	74.00	17.41 peak
2	5350.000	8.63	34.43	37.52	44.86	50.40	74.00	-23.60 peak
3	5354.754	8.64	34.43	37.53	46.14	51.68	74.00	-22.32 peak


Test mode:	802.11n(HT20)	Frequency(MHz):	5240	Average	Horizontal
------------	---------------	-----------------	------	---------	------------



SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM170800926003

Page: 288 of 411

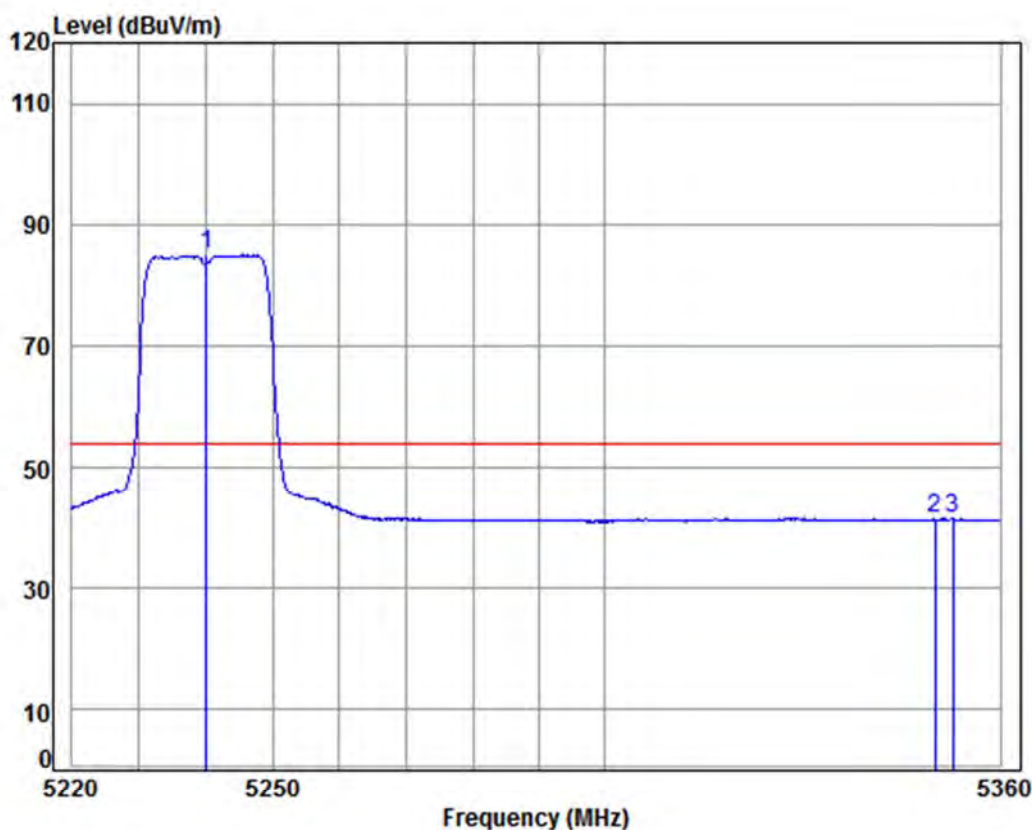

Condition: 3m HORIZONTAL
Job No : 09260RG
Mode : 5240 Band edge
: 5G WiFi 11N20
: 12

		Cable	Ant	Preamp	Read	Limit	Over	
	Freq	Loss	Factor	Factor	Level	Line	Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1	pp 5240.000	8.46	34.45	37.45	79.42	84.88	54.00	30.88 Average
2	5350.000	8.63	34.43	37.52	35.83	41.37	54.00	-12.63 Average
3	5352.770	8.63	34.43	37.52	36.00	41.54	54.00	-12.46 Average




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM170800926003

Page: 289 of 411

Test mode:	802.11n(HT20)	Frequency(MHz):	5260	Peak	Vertical
------------	---------------	-----------------	------	------	----------

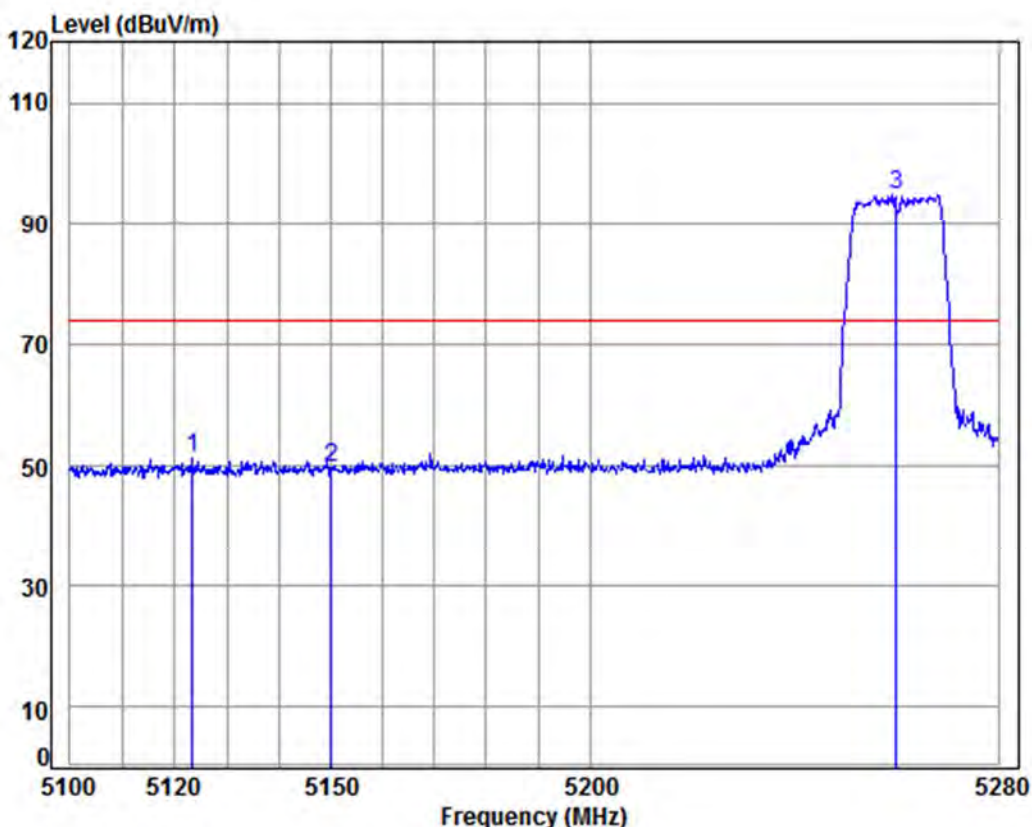

Condition: 3m VERTICAL
Job No : 09260RG
Mode : 5260 Band edge
: 5G WiFi 11N20
: 12

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	5123.404	8.28	34.47	37.38	45.88	51.25	74.00	-22.75	Peak
2	5150.000	8.33	34.47	37.40	44.27	49.67	74.00	-24.33	Peak
3 pp	5260.000	8.49	34.45	37.47	89.35	94.82	74.00	20.82	Peak




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM170800926003

Page: 290 of 411

Test mode:	802.11n(HT20)	Frequency(MHz):	5260	Average	Vertical
------------	---------------	-----------------	------	---------	----------

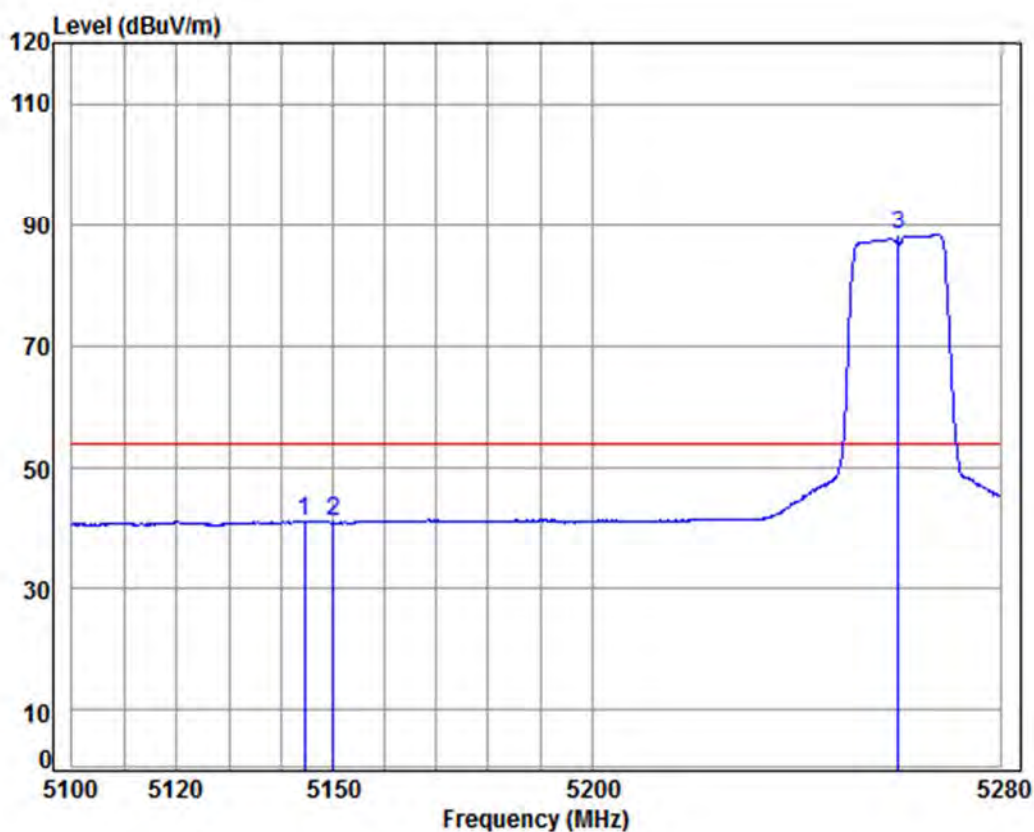

Condition: 3m VERTICAL
Job No : 09260RG
Mode : 5260 Band edge
: 5G WiFi 11N20
: 12

		Cable	Ant	Preamp	Read	Limit	Over	
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1	5144.595	8.32	34.47	37.39	35.90	41.30	54.00	-12.70 Average
2	5150.000	8.33	34.47	37.40	35.64	41.04	54.00	-12.96 Average
3	pp 5260.000	8.49	34.45	37.47	82.77	88.24	54.00	34.24 Average




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM170800926003

Page: 291 of 411

Test mode:	802.11n(HT20)	Frequency(MHz):	5260	Peak	Horizontal
------------	---------------	-----------------	------	------	------------

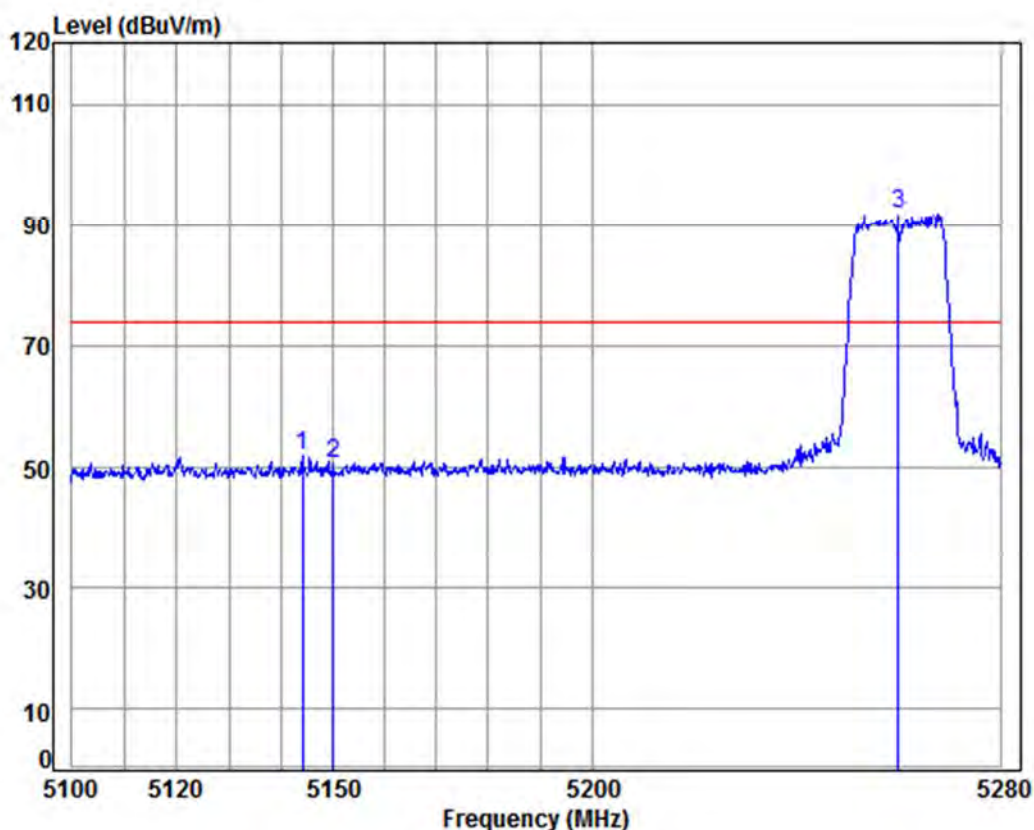

Condition: 3m HORIZONTAL
Job No : 09260RG
Mode : 5260 Band edge
: 5G WiFi 11N20
: 12

	Freq	Cable	Ant	Preamp	Read	Limit	Over	
	MHz	Loss	Factor	Factor	Level	Level	Line	Limit Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1	5144.238	8.32	34.47	37.39	46.59	51.99	74.00	-22.01 peak
2	5150.000	8.33	34.47	37.40	45.23	50.63	74.00	-23.37 peak
3 pp	5260.000	8.49	34.45	37.47	86.26	91.73	74.00	17.73 peak




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM170800926003

Page: 292 of 411

Test mode:	802.11n(HT20)	Frequency(MHz):	5260	Average	Horizontal
------------	---------------	-----------------	------	---------	------------

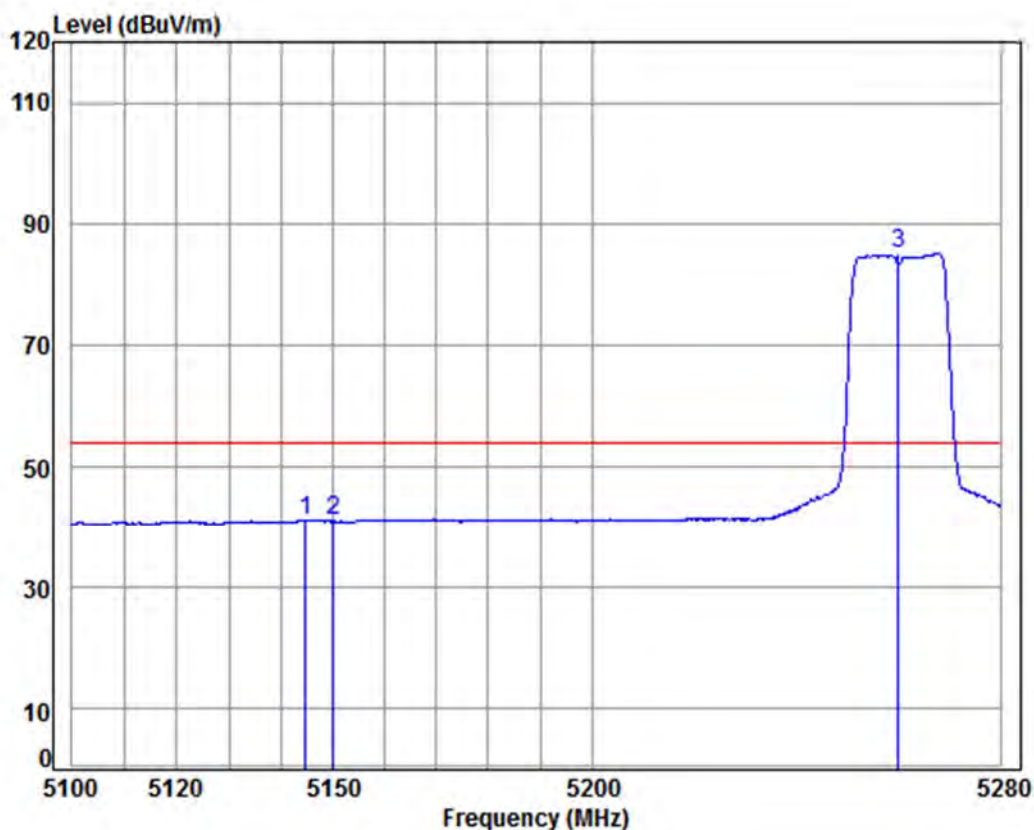

Condition: 3m HORIZONTAL
Job No : 09260RG
Mode : 5260 Band edge
: 5G WiFi 11N20
: 12

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	5144.773	8.32	34.47	37.39	35.87	41.27	54.00	-12.73	Average
2	5150.000	8.33	34.47	37.40	35.65	41.05	54.00	-12.95	Average
3 pp	5260.000	8.49	34.45	37.47	79.58	85.05	54.00	31.05	Average




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM170800926003

Page: 293 of 411

Test mode:	802.11n(HT20)	Frequency(MHz):	5320	Peak	Vertical
------------	---------------	-----------------	------	------	----------

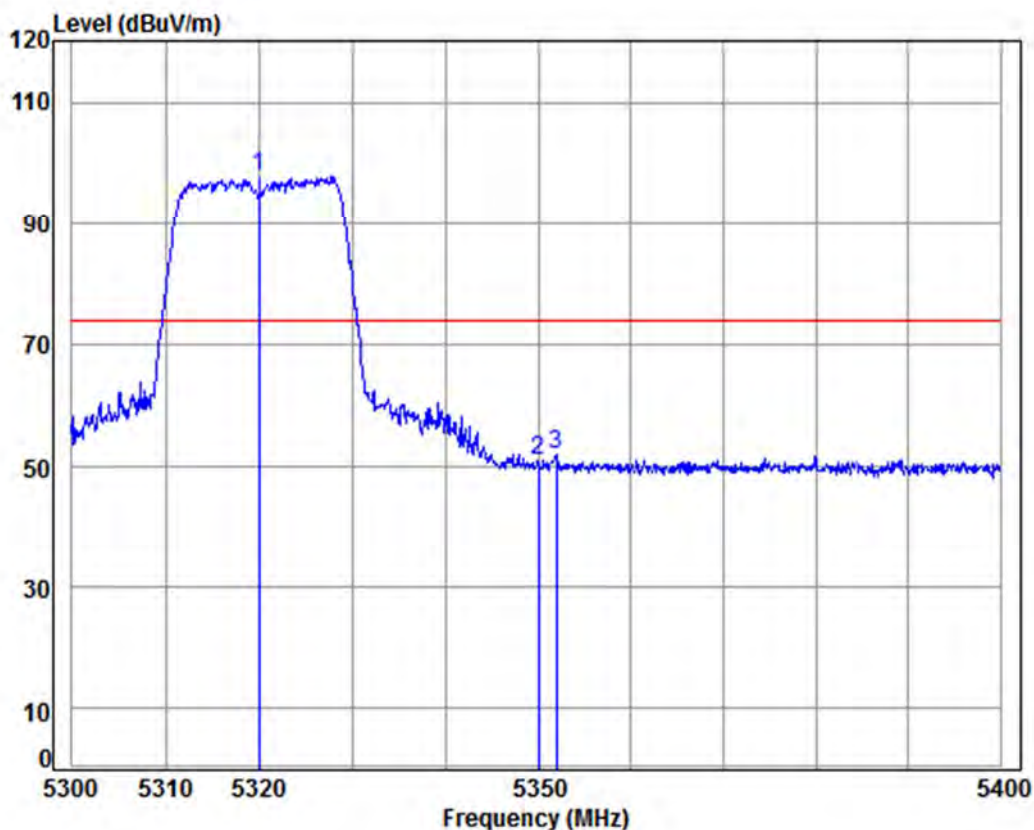

Condition: 3m VERTICAL
Job No : 09260RG
Mode : 5320 Band edge
: 5G WiFi 11N20
: 12

		Cable	Ant	Preamp	Read	Limit	Over	
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1	pp 5320.000	8.58	34.43	37.50	92.27	97.78	74.00	23.78 Peak
2	5350.000	8.63	34.43	37.52	45.45	50.99	74.00	-23.01 Peak
3	5351.967	8.63	34.43	37.52	46.56	52.10	74.00	-21.90 Peak




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM170800926003

Page: 294 of 411

Test mode:	802.11n(HT20)	Frequency(MHz):	5320	Average	Vertical
------------	---------------	-----------------	------	---------	----------

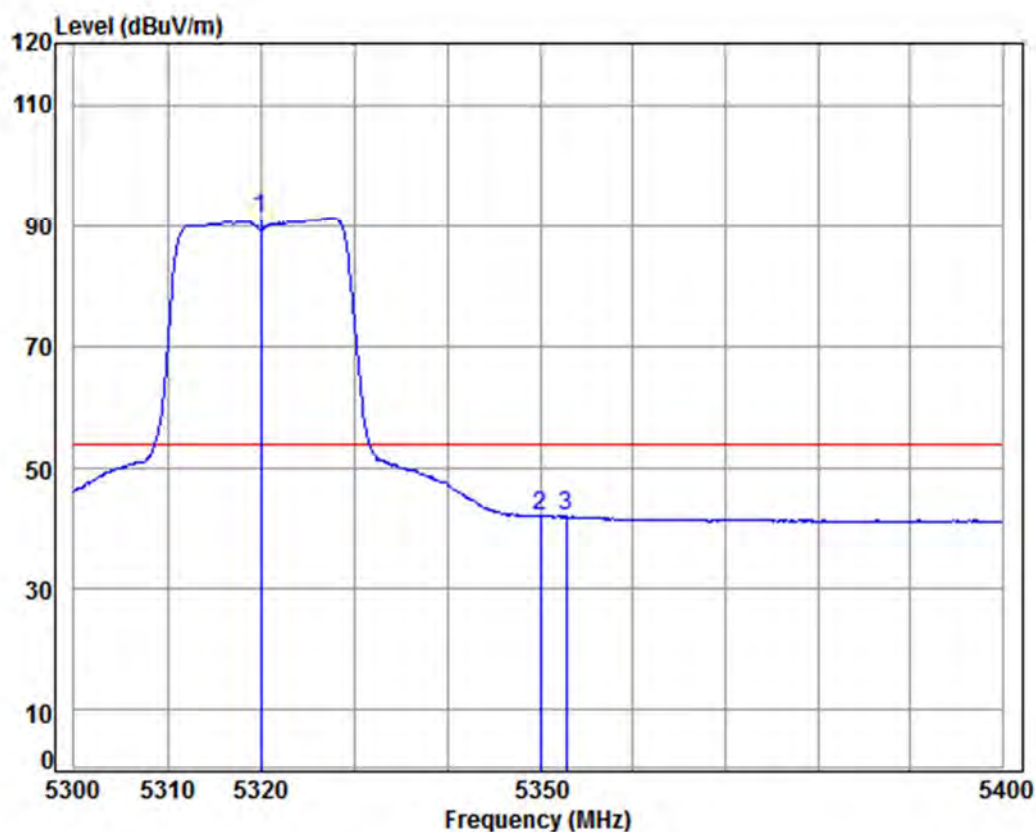

Condition: 3m VERTICAL

Job No : 09260RG

Mode : 5320 Band edge

: 5G WiFi 11N20

: 12

		Cable	Ant	Preamp	Read	Limit	Over	
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1	pp 5320.000	8.58	34.43	37.50	85.77	91.28	54.00	37.28 Average
2	5350.000	8.63	34.43	37.52	36.59	42.13	54.00	-11.87 Average
3	5352.767	8.63	34.43	37.52	36.58	42.12	54.00	-11.88 Average




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM170800926003

Page: 295 of 411

Test mode:	802.11n(HT20)	Frequency(MHz):	5320	Peak	Horizontal
------------	---------------	-----------------	------	------	------------

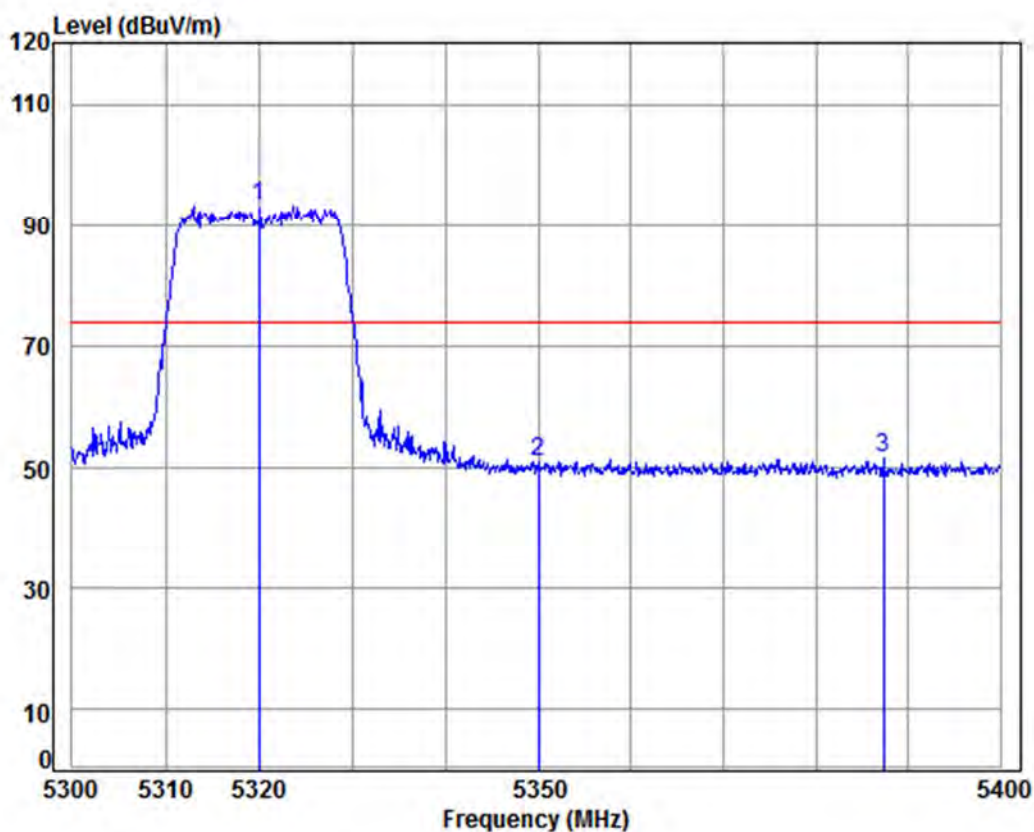

Condition: 3m HORIZONTAL

Job No : 09260RG

Mode : 5320 Band edge

: 5G WiFi 11N20

: 12

		Cable	Ant	Preamp	Read	Limit	Over	
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1	pp 5320.000	8.58	34.43	37.50	87.67	93.18	74.00	19.18 peak
2	5350.000	8.63	34.43	37.52	45.32	50.86	74.00	-23.14 peak
3	5387.297	8.68	34.42	37.55	45.99	51.54	74.00	-22.46 peak




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM170800926003

Page: 296 of 411

Test mode:	802.11n(HT20)	Frequency(MHz):	5320	Average	Horizontal
------------	---------------	-----------------	------	---------	------------

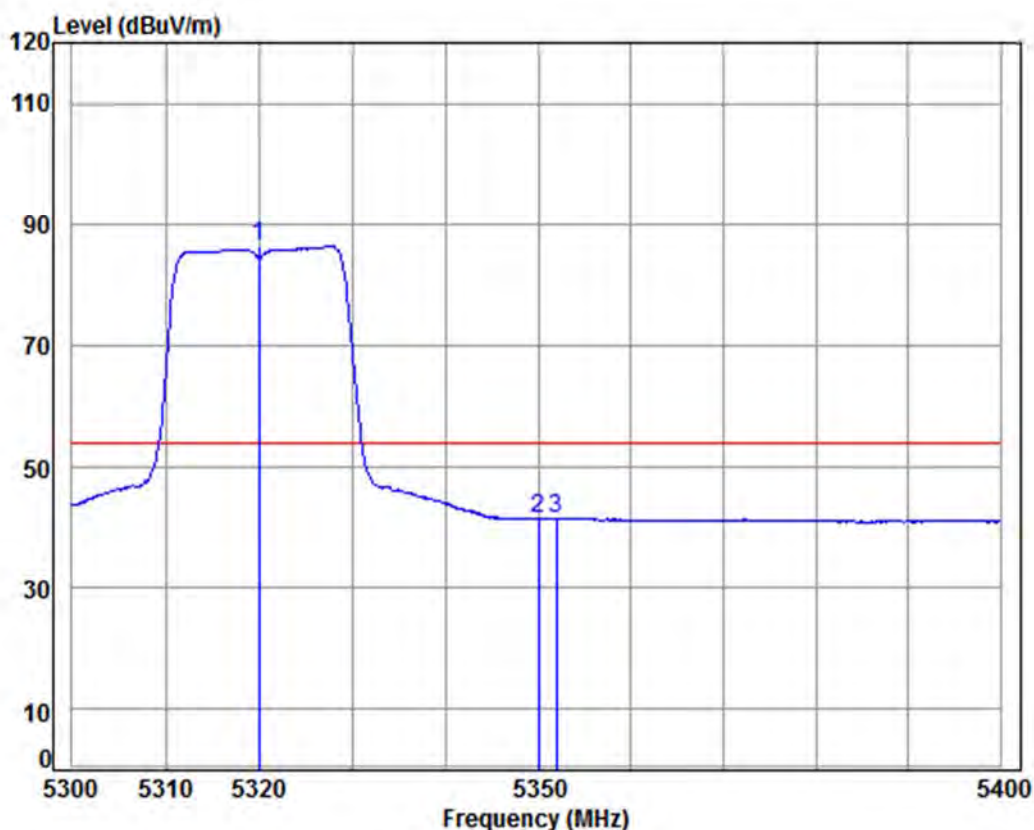

Condition: 3m HORIZONTAL
Job No : 09260RG
Mode : 5320 Band edge
: 5G WiFi 11N20
: 12

		Cable	Ant	Preamp	Read	Limit	Over	
	Freq	Loss	Factor	Factor	Level	Level	Line	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1	pp 5320.000	8.58	34.43	37.50	80.80	86.31	54.00	32.31 Average
2	5350.000	8.63	34.43	37.52	36.05	41.59	54.00	-12.41 Average
3	5351.967	8.63	34.43	37.52	36.04	41.58	54.00	-12.42 Average




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM170800926003

Page: 297 of 411

Test mode:	802.11n(HT20)	Frequency(MHz):	5500	Peak	Vertical
------------	---------------	-----------------	------	------	----------

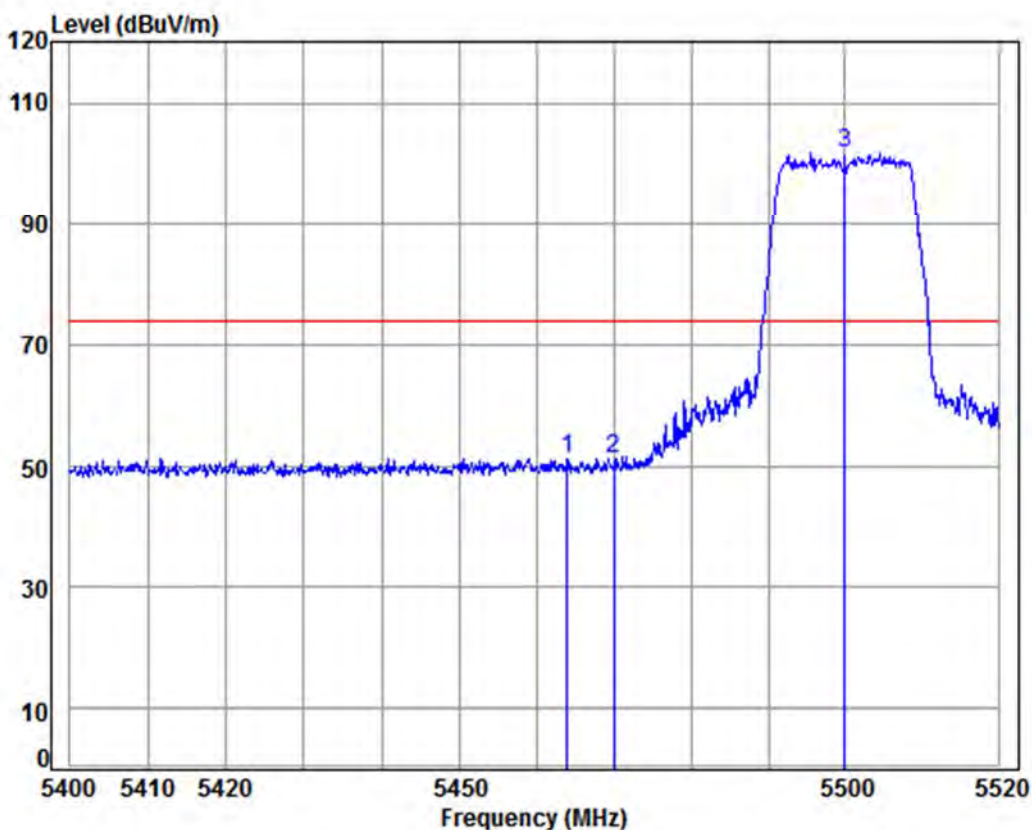

Condition: 3m VERTICAL
Job No : 09260RG
Mode : 5500 Band edge
: 5G WiFi 11N20
: 12

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	5463.992	8.80	34.41	37.59	45.88	51.50	74.00	-22.50	Peak
2	5470.000	8.81	34.41	37.60	45.83	51.45	74.00	-22.55	Peak
3 pp	5500.000	8.85	34.40	37.61	96.12	101.76	74.00	27.76	Peak




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM170800926003

Page: 298 of 411

Test mode:	802.11n(HT20)	Frequency(MHz):	5500	Average	Vertical
------------	---------------	-----------------	------	---------	----------

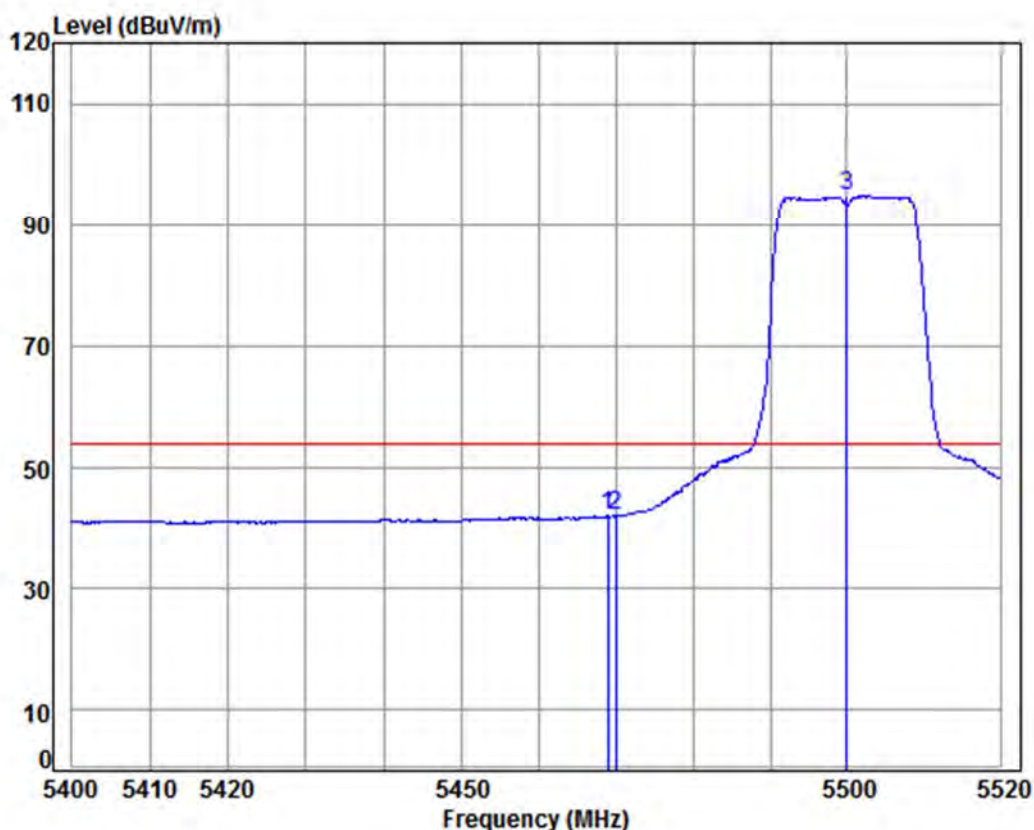

Condition: 3m VERTICAL

Job No : 09260RG

Mode : 5500 Band edge

: 5G WiFi 11N20

: 12

	Freq	Cable	Ant	Preamp	Read	Limit	Over	
	MHz	Loss	Factor	Factor	Level	Level	Line	Limit Remark
		dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1	5468.918	8.80	34.41	37.60	36.44	42.05	54.00	-11.95 Average
2	5470.000	8.81	34.41	37.60	36.58	42.20	54.00	-11.80 Average
3 pp	5500.000	8.85	34.40	37.61	89.17	94.81	54.00	40.81 Average




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM170800926003

Page: 299 of 411

Test mode:	802.11n(HT20)	Frequency(MHz):	5500	Peak	Horizontal
------------	---------------	-----------------	------	------	------------

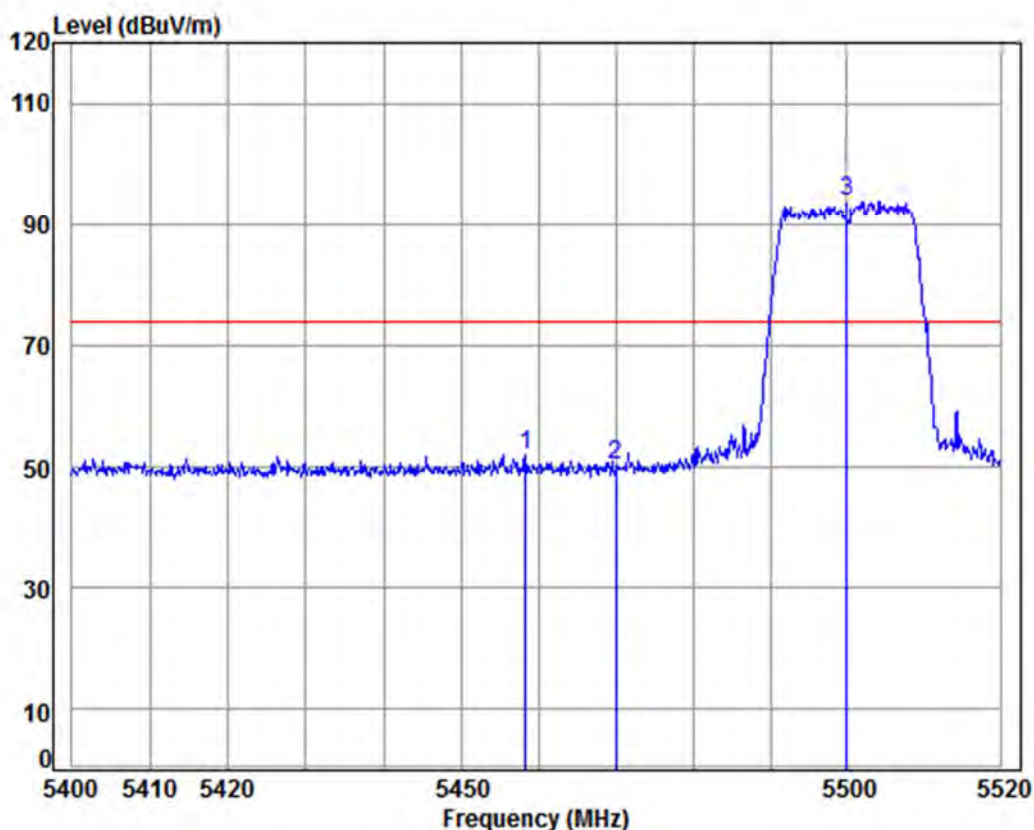

Condition: 3m HORIZONTAL
Job No : 09260RG
Mode : 5500 Band edge
: 5G WiFi 11N20
: 12

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	5458.351	8.79	34.41	37.59	46.44	52.05	74.00	-21.95	peak
2	5470.000	8.81	34.41	37.60	44.83	50.45	74.00	-23.55	peak
3 pp	5500.000	8.85	34.40	37.61	88.21	93.85	74.00	19.85	peak




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM170800926003

Page: 300 of 411

Test mode:	802.11n(HT20)	Frequency(MHz):	5500	Average	Horizontal
------------	---------------	-----------------	------	---------	------------

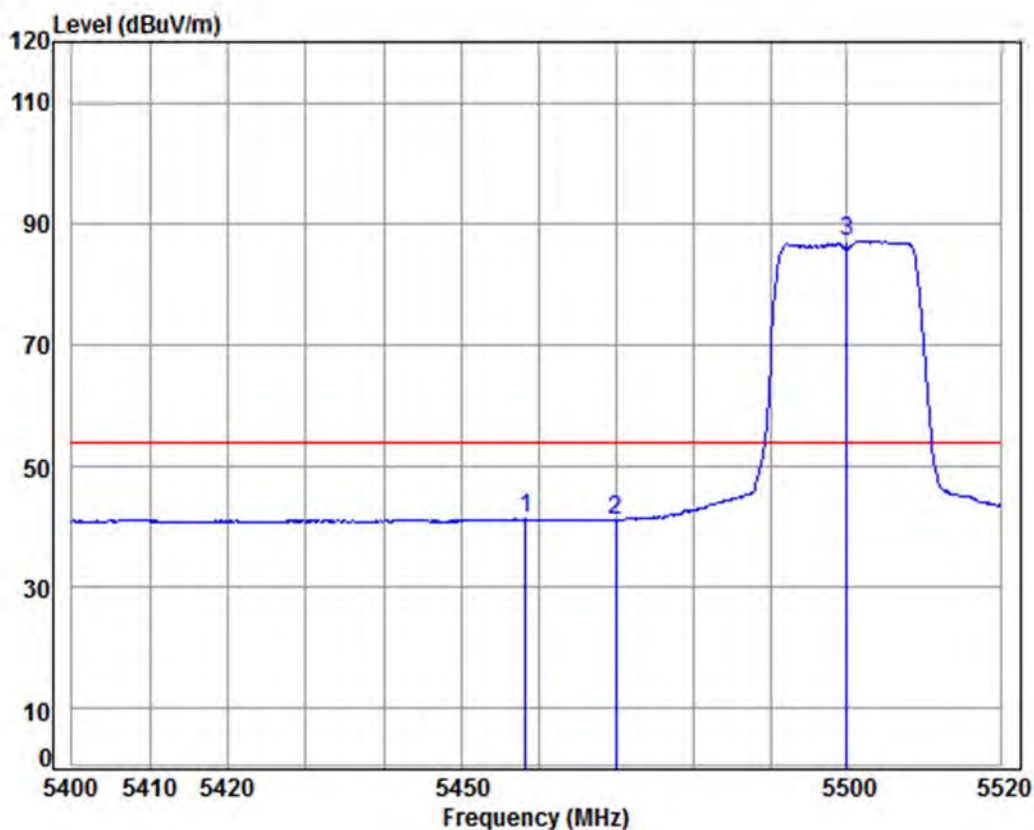

Condition: 3m HORIZONTAL
Job No : 09260RG
Mode : 5500 Band edge
: 5G WiFi 11N20
: 12

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	5458.351	8.79	34.41	37.59	35.76	41.37	54.00	-12.63	Average
2	5470.000	8.81	34.41	37.60	35.72	41.34	54.00	-12.66	Average
3 pp	5500.000	8.85	34.40	37.61	81.40	87.04	54.00	33.04	Average




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM170800926003

Page: 301 of 411

Test mode:	802.11n(HT20)	Frequency(MHz):	5700	Peak	Vertical
------------	---------------	-----------------	------	------	----------

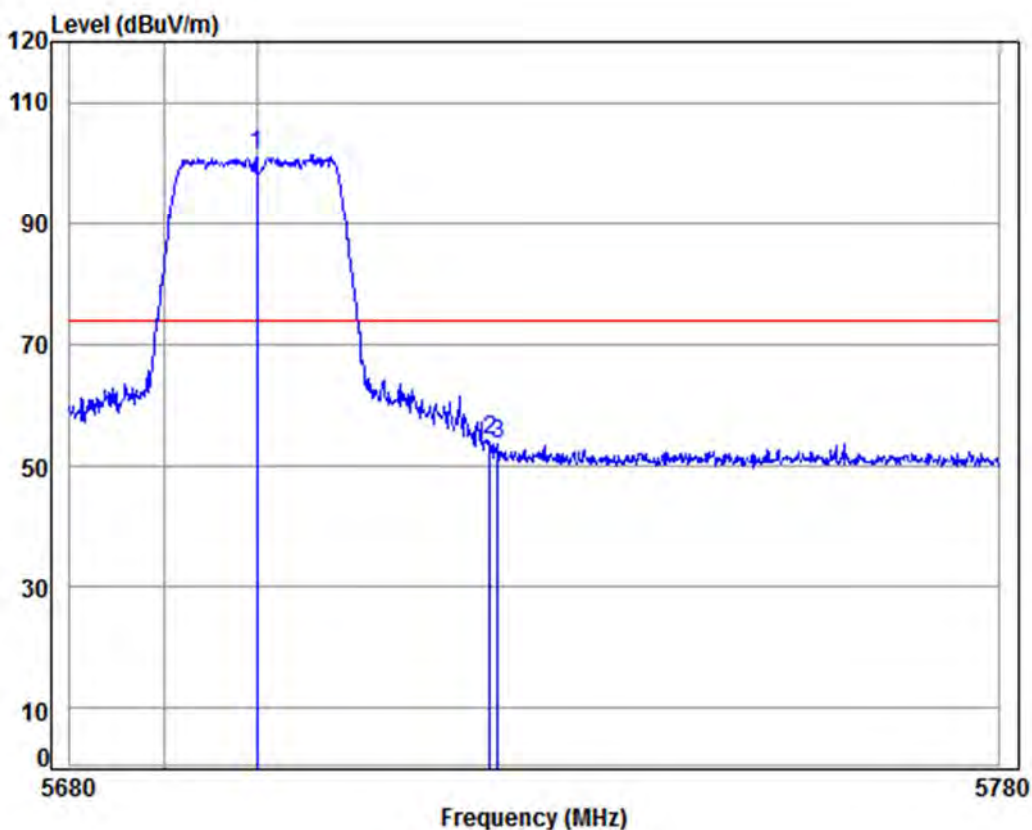

Condition: 3m VERTICAL
Job No : 09260RG
Mode : 5700 Band edge
: 5G WiFi 11N20
: 12

		Cable	Ant	Preamp	Read	Limit	Over	
	Freq	Loss	Factor	Factor	Level	Line	Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1 pp	5700.000	9.56	34.52	37.73	94.91	101.26	74.00	27.26 Peak
2	5725.000	9.64	34.54	37.75	47.97	54.40	74.00	-19.60 Peak
3	5725.883	9.65	34.54	37.75	47.34	53.78	74.00	-20.22 Peak




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM170800926003

Page: 302 of 411

Test mode:	802.11n(HT20)	Frequency(MHz):	5700	Average	Vertical
------------	---------------	-----------------	------	---------	----------

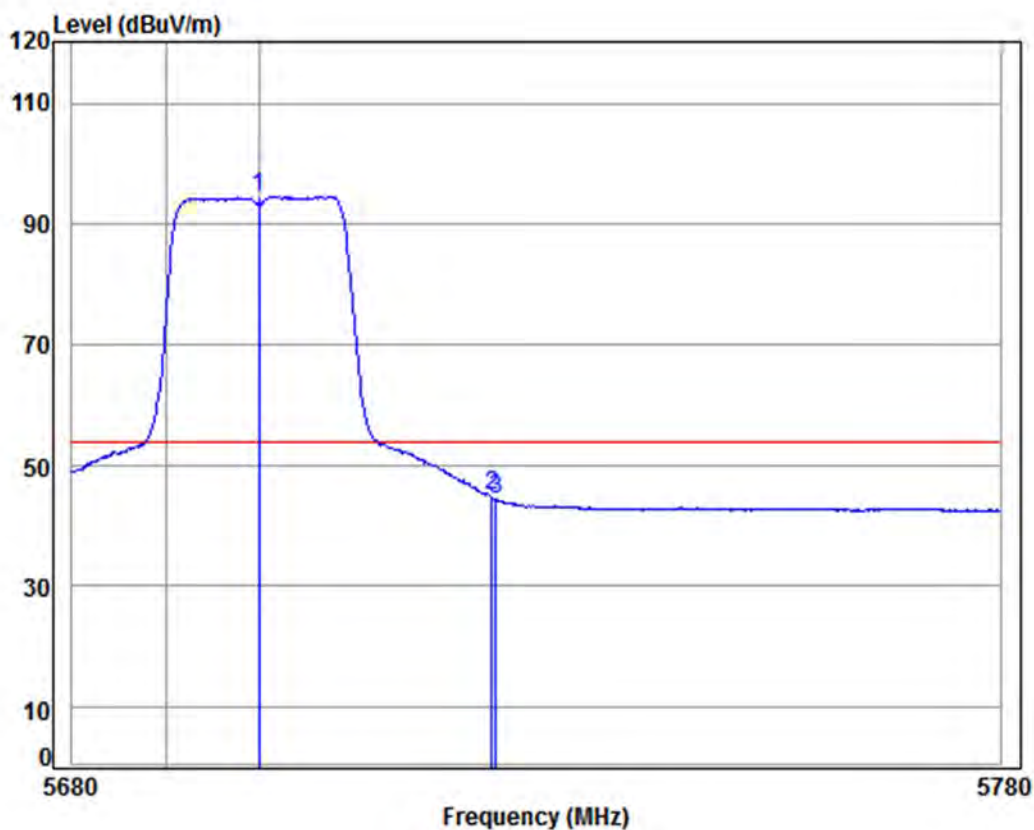

Condition: 3m VERTICAL
Job No : 09260RG
Mode : 5700 Band edge
: 5G WiFi 11N20
: 12

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1 pp	5700.000	9.56	34.52	37.73	88.27	94.62	54.00	40.62	Average
2	5725.000	9.64	34.54	37.75	38.64	45.07	54.00	-8.93	Average
3	5725.483	9.64	34.54	37.75	37.93	44.36	54.00	-9.64	Average




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM170800926003

Page: 303 of 411

Test mode:	802.11n(HT20)	Frequency(MHz):	5700	Peak	Horizontal
------------	---------------	-----------------	------	------	------------

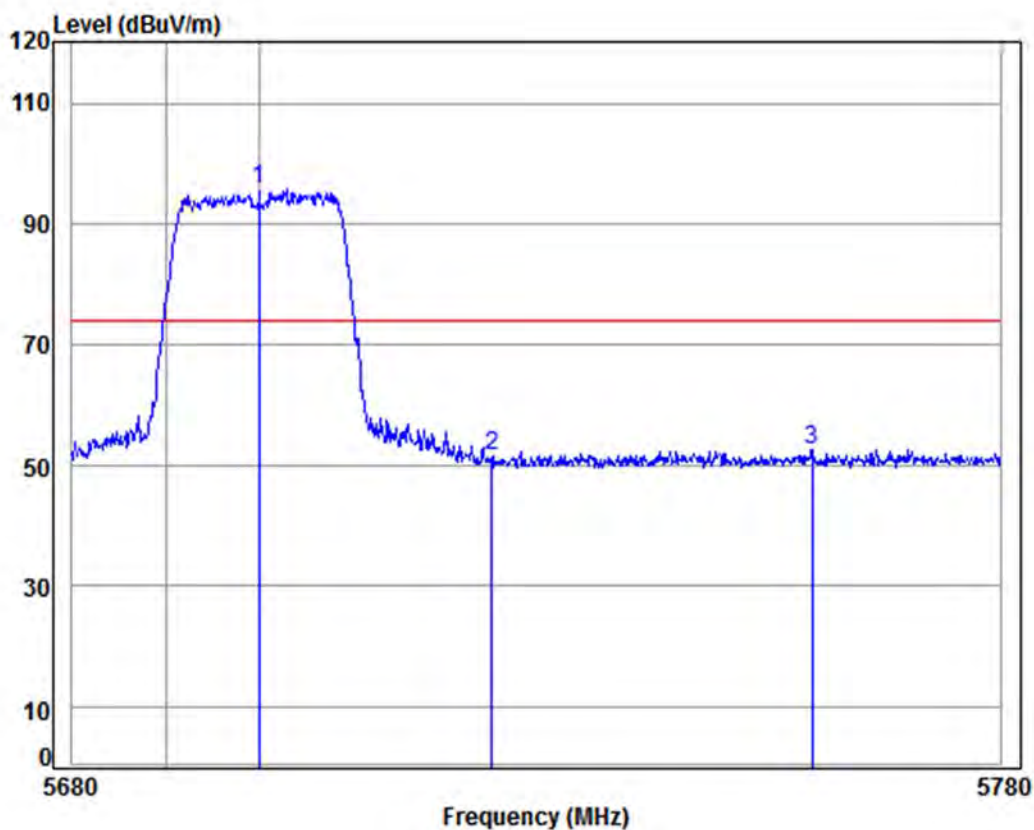

Condition: 3m HORIZONTAL
Job No : 09260RG
Mode : 5700 Band edge
: 5G WiFi 11N20
: 12

		Cable	Ant	Preamp	Read	Limit	Over	
	Freq	Loss	Factor	Factor	Level	Line	Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1 pp	5700.000	9.56	34.52	37.73	89.60	95.95	74.00	21.95 peak
2	5725.000	9.64	34.54	37.75	45.09	51.52	74.00	-22.48 peak
3	5759.559	9.76	34.56	37.77	46.25	52.80	74.00	-21.20 peak




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM170800926003

Page: 304 of 411

Test mode:	802.11n(HT20)	Frequency(MHz):	5700	Average	Horizontal
------------	---------------	-----------------	------	---------	------------

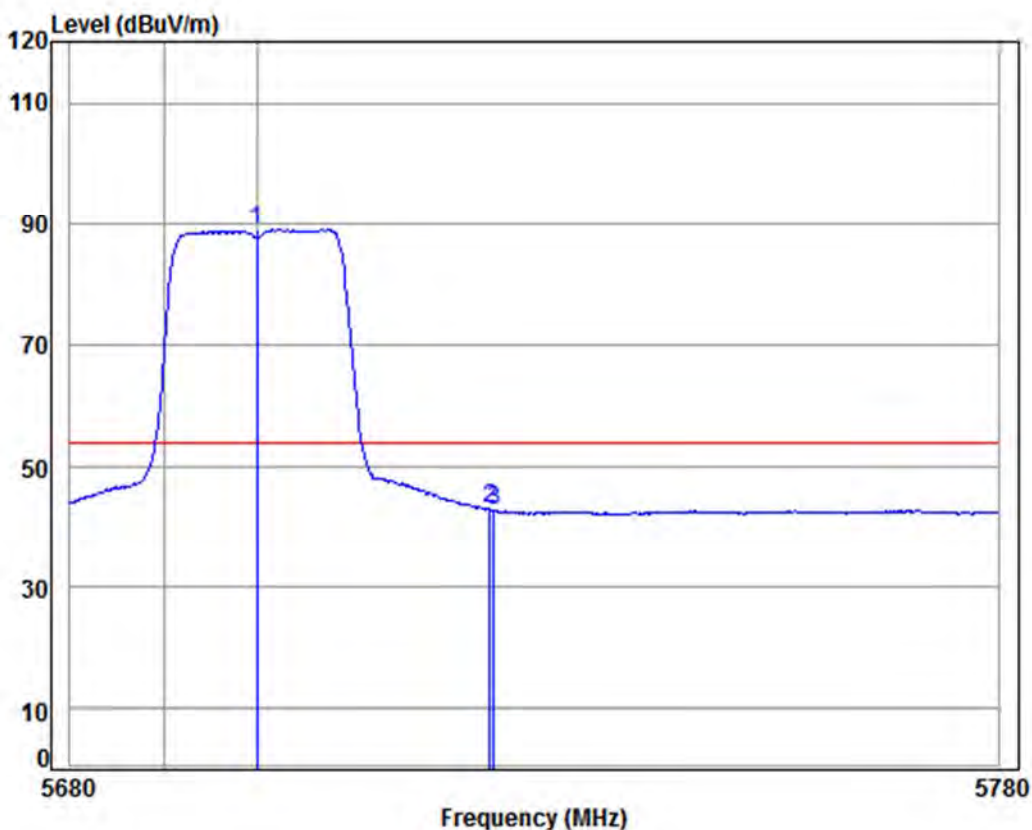

Condition: 3m HORIZONTAL
Job No : 09260RG
Mode : 5700 Band edge
: 5G WiFi 11N20
: 12

		Cable	Ant	Preamp	Read	Limit	Over	
	Freq	Loss	Factor	Factor	Level	Line	Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1 pp	5700.000	9.56	34.52	37.73	82.57	88.92	54.00	34.92 Average
2	5725.000	9.64	34.54	37.75	36.70	43.13	54.00	-10.87 Average
3	5725.483	9.64	34.54	37.75	36.40	42.83	54.00	-11.17 Average




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM170800926003

Page: 305 of 411

Test mode:	802.11n(HT20)	Frequency(MHz):	5745	Peak	Vertical
------------	---------------	-----------------	------	------	----------

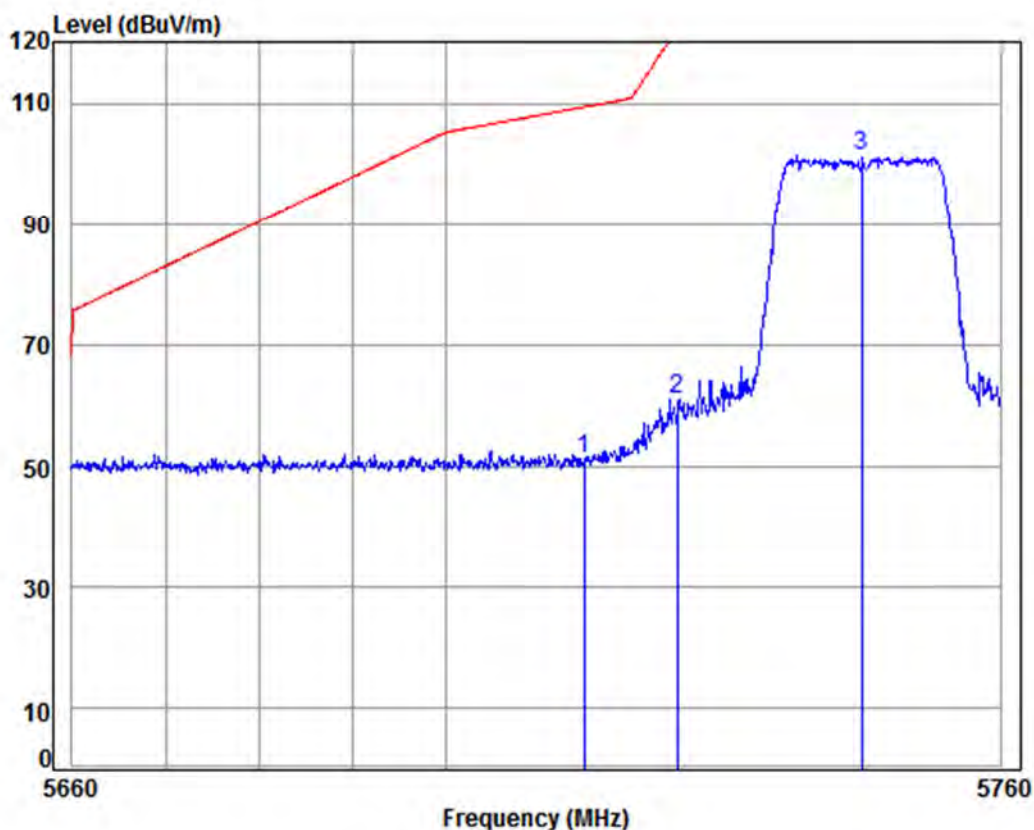

Condition: 3m VERTICAL
Job No : 09260RG
Mode : 5745 Band edge
: 5G WiFi 11N20

		Cable	Ant	Preamp	Read	Limit	Over	
	Freq	Loss	Factor	Factor	Level	Line	Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1	5715.000	9.61	34.53	37.74	44.81	51.21	109.40	-58.19 peak
2	5725.000	9.64	34.54	37.75	54.57	61.00	122.20	-61.20 peak
3 pp	5745.000	9.71	34.55	37.76	94.87	101.37	125.20	-23.83 peak




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM170800926003

Page: 306 of 411

Test mode:	802.11n(HT20)	Frequency(MHz):	5745	Peak	Horizontal
------------	---------------	-----------------	------	------	------------

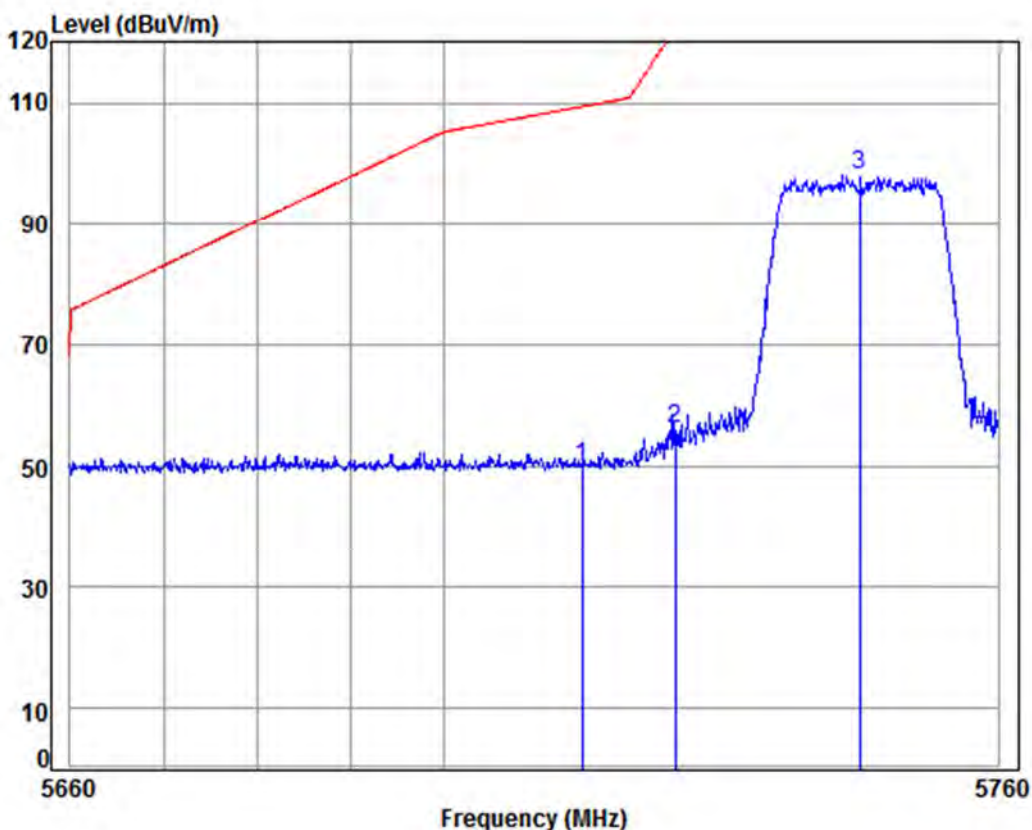

Condition: 3m HORIZONTAL

Job No : 09260RG

Mode : 5745 Band edge

: 5G WiFi 11N20

		Cable	Ant	Preamp	Read	Limit	Over	
	Freq	Loss	Factor	Factor	Level	Line	Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1	5715.000	9.61	34.53	37.74	43.71	50.11	109.40	-59.29 peak
2	5725.000	9.64	34.54	37.75	49.68	56.11	122.20	-66.09 peak
3 pp	5745.000	9.71	34.55	37.76	91.43	97.93	125.20	-27.27 peak




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM170800926003

Page: 307 of 411

Test mode:	802.11n(HT20)	Frequency(MHz):	5825	Peak	Vertical
------------	---------------	-----------------	------	------	----------

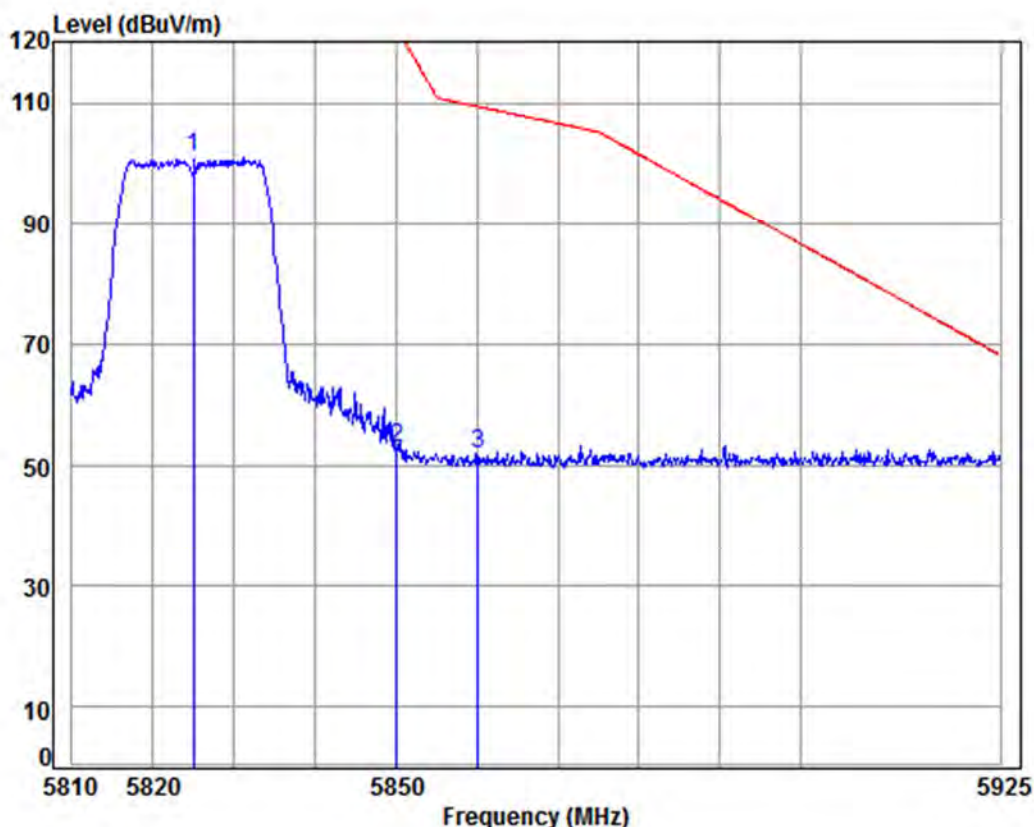

Condition: 3m VERTICAL

Job No : 09260RG

Mode : 5825 Band edge

: 5G WiFi 11N20

		Cable	Ant	Preamp	Read	Limit	Over		
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1 pp	5825.000	9.98	34.60	37.80	94.14	100.92	125.20	-24.28	peak
2	5850.000	10.07	34.61	37.82	46.12	52.98	122.20	-69.22	peak
3	5860.000	10.10	34.62	37.82	45.12	52.02	109.40	-57.38	peak




SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch

Report No.: SZEM170800926003

Page: 308 of 411

Test mode:	802.11n(HT20)	Frequency(MHz):	5825	Peak	Horizontal
------------	---------------	-----------------	------	------	------------

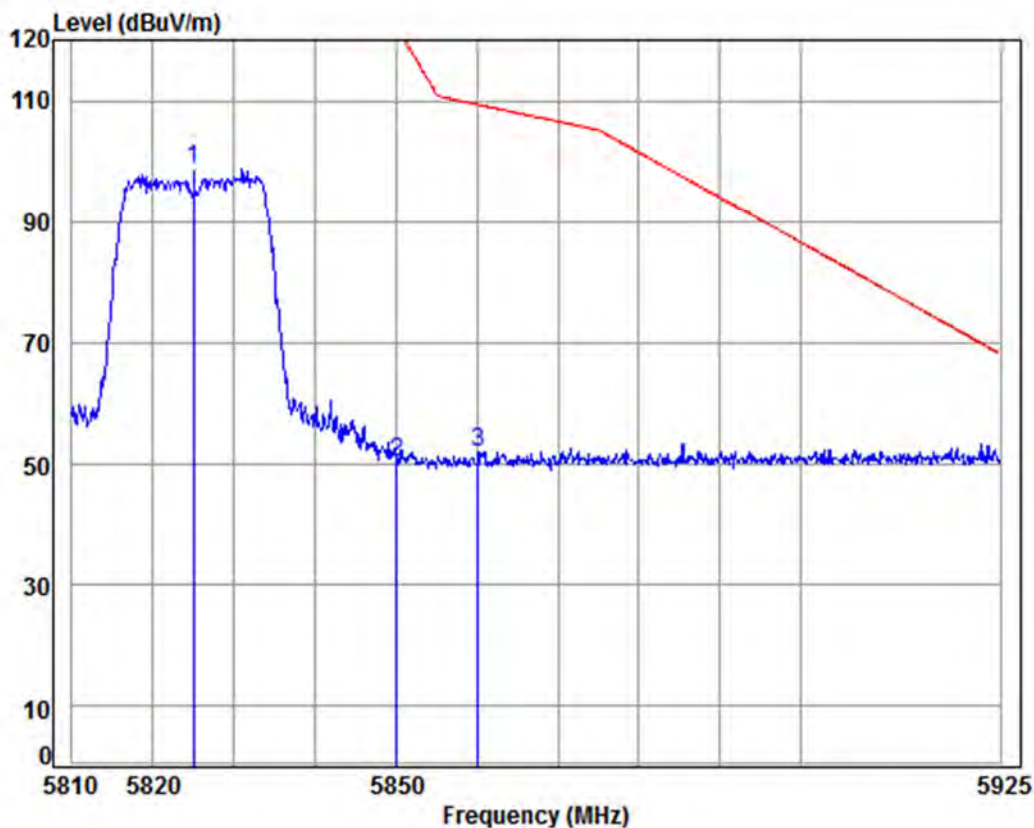

Condition: 3m HORIZONTAL

Job No : 09260RG

Mode : 5825 Band edge

: 5G WiFi 11N20

		Cable	Ant	Preamp	Read	Limit	Over		
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1 pp	5825.000	9.98	34.60	37.80	91.86	98.64	125.20	-26.56	peak
2	5850.000	10.07	34.61	37.82	43.65	50.51	122.20	-71.69	peak
3	5860.000	10.10	34.62	37.82	45.13	52.03	109.40	-57.37	peak




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM170800926003

Page: 309 of 411

Test mode:	802.11ac(HT20)	Frequency(MHz):	5180	Peak	Vertical
------------	----------------	-----------------	------	------	----------

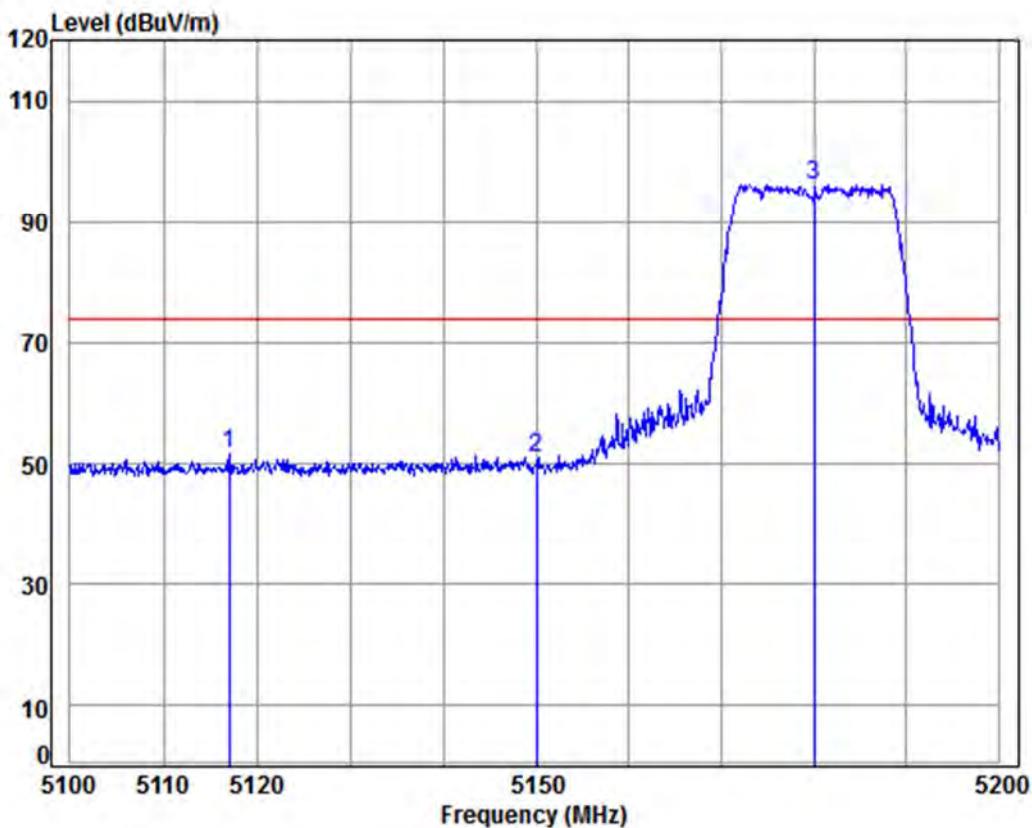

Condition: 3m VERTICAL
Job No : 09260RG
Mode : 5180 Band edge
: 5G WiFi 11AC20
: 12

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	5117.062	8.27	34.48	37.38	46.27	51.64	74.00	-22.36	Peak
2	5150.000	8.33	34.47	37.40	45.73	51.13	74.00	-22.87	Peak
3	pp 5180.000	8.37	34.46	37.42	90.82	96.23	74.00	22.23	Peak




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM170800926003

Page: 310 of 411

Test mode:	802.11ac(HT20)	Frequency(MHz):	5180	Average	Vertical
------------	----------------	-----------------	------	---------	----------

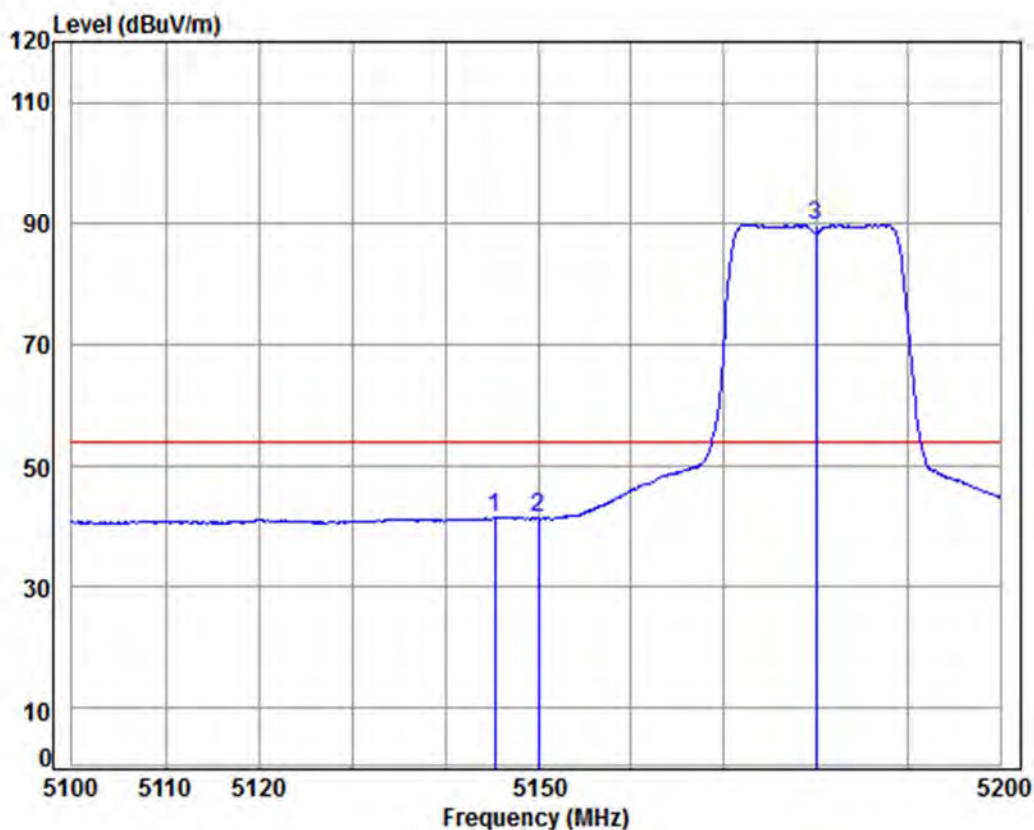

Condition: 3m VERTICAL
Job No : 09260RG
Mode : 5180 Band edge
: 5G WiFi 11AC20
: 12

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	5145.359	8.32	34.47	37.39	36.25	41.65	54.00	-12.35	Average
2	5150.000	8.33	34.47	37.40	36.06	41.46	54.00	-12.54	Average
3 pp	5180.000	8.37	34.46	37.42	84.33	89.74	54.00	35.74	Average




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM170800926003

Page: 311 of 411

Test mode:	802.11ac(HT20)	Frequency(MHz):	5180	Peak	Horizontal
------------	----------------	-----------------	------	------	------------

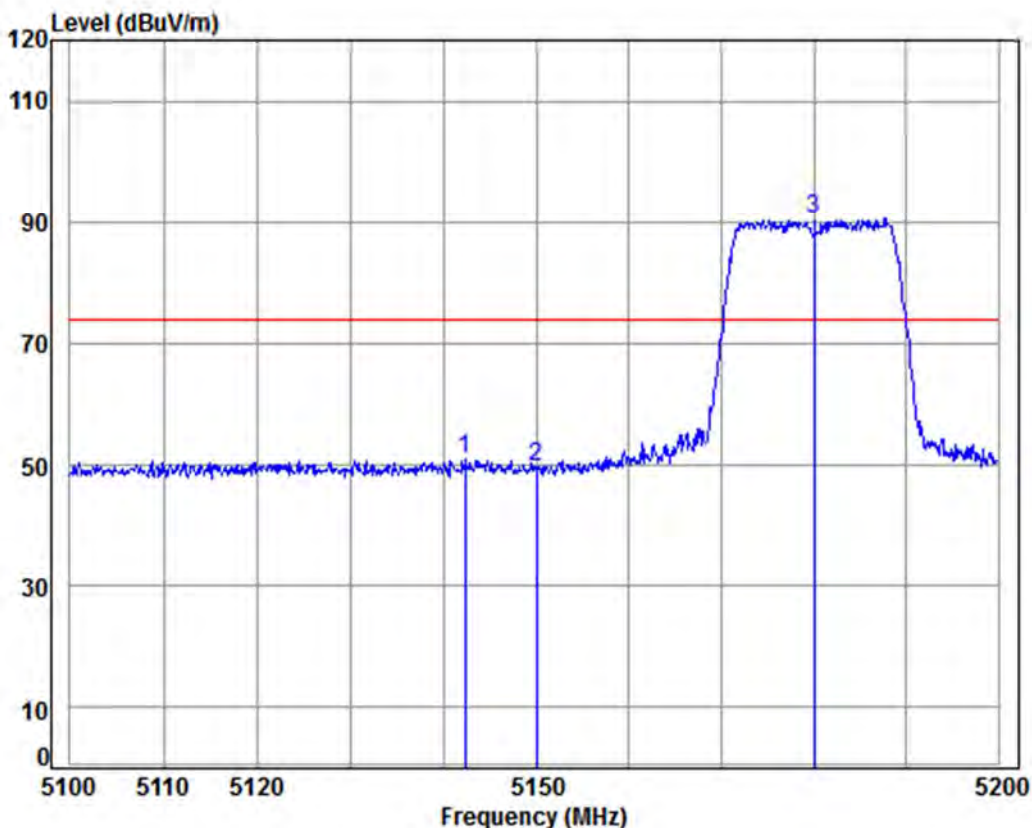

Condition: 3m HORIZONTAL
Job No : 09260RG
Mode : 5180 Band edge
: 5G WiFi 11AC20
: 12

	Freq	Cable Loss	Ant Factor	Preamplifier Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	5142.363	8.31	34.47	37.39	45.54	50.93	74.00	-23.07	peak
2	5150.000	8.33	34.47	37.40	44.40	49.80	74.00	-24.20	peak
3	pp 5180.000	8.37	34.46	37.42	85.06	90.47	74.00	16.47	peak




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM170800926003

Page: 312 of 411

Test mode:	802.11ac(HT20)	Frequency(MHz):	5180	Average	Horizontal
------------	----------------	-----------------	------	---------	------------

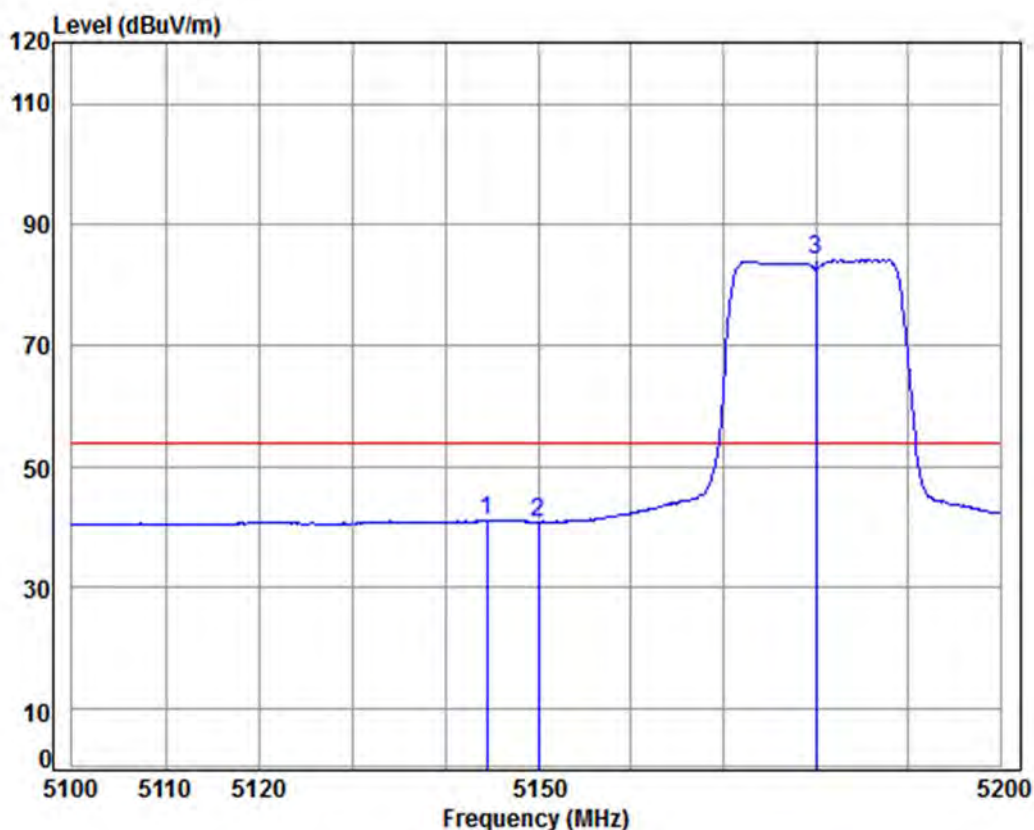

Condition: 3m HORIZONTAL
Job No : 09260RG
Mode : 5180 Band edge
: 5G WiFi 11AC20
: 12

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit	Over	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	5144.460	8.32	34.47	37.39	35.87	41.27	54.00	-12.73	Average
2	5150.000	8.33	34.47	37.40	35.60	41.00	54.00	-13.00	Average
3 pp	5180.000	8.37	34.46	37.42	78.58	83.99	54.00	29.99	Average




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM170800926003

Page: 313 of 411

Test mode:	802.11ac(HT20)	Frequency(MHz):	5240	Peak	Vertical
------------	----------------	-----------------	------	------	----------

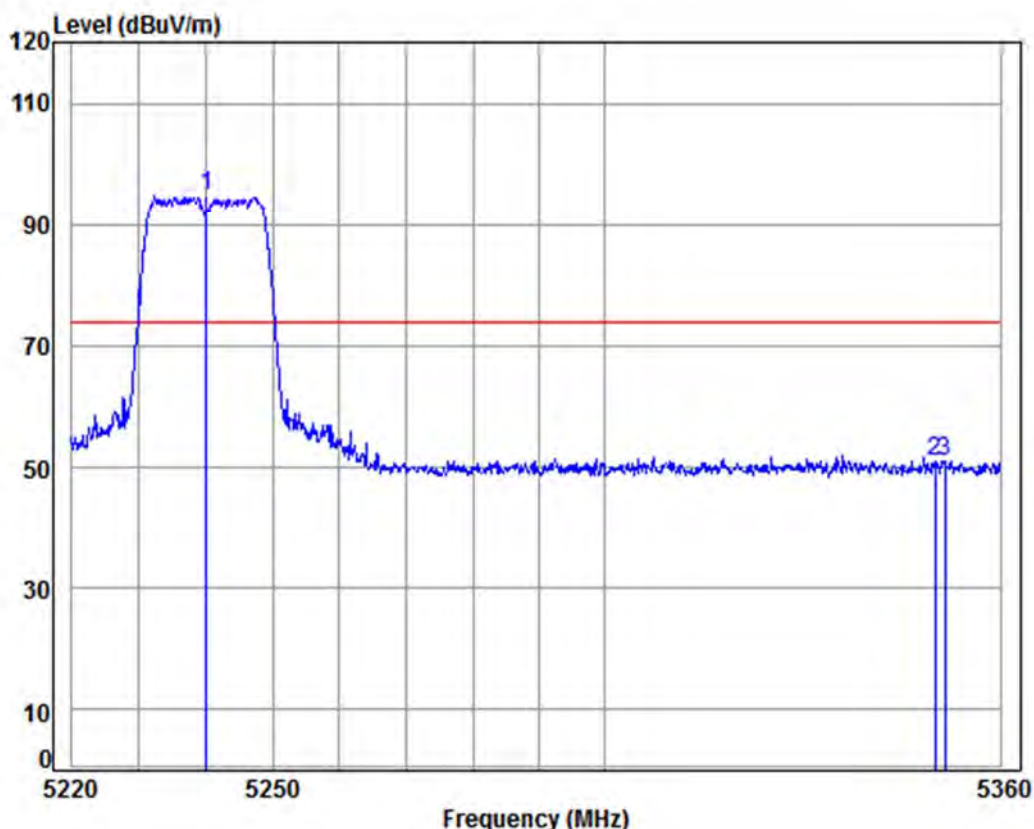

Condition: 3m VERTICAL
Job No : 09260RG
Mode : 5240 Band edge
: 5G WiFi 11AC20
: 12

		Cable	Ant	Preamp	Read	Limit	Over	
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1	pp 5240.000	8.46	34.45	37.45	89.25	94.71	74.00	20.71 Peak
2	5350.000	8.63	34.43	37.52	45.59	51.13	74.00	-22.87 Peak
3	5351.495	8.63	34.43	37.52	45.55	51.09	74.00	-22.91 Peak




SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch

Report No.: SZEM170800926003

Page: 314 of 411

Test mode:	802.11ac(HT20)	Frequency(MHz):	5240	Average	Vertical
------------	----------------	-----------------	------	---------	----------

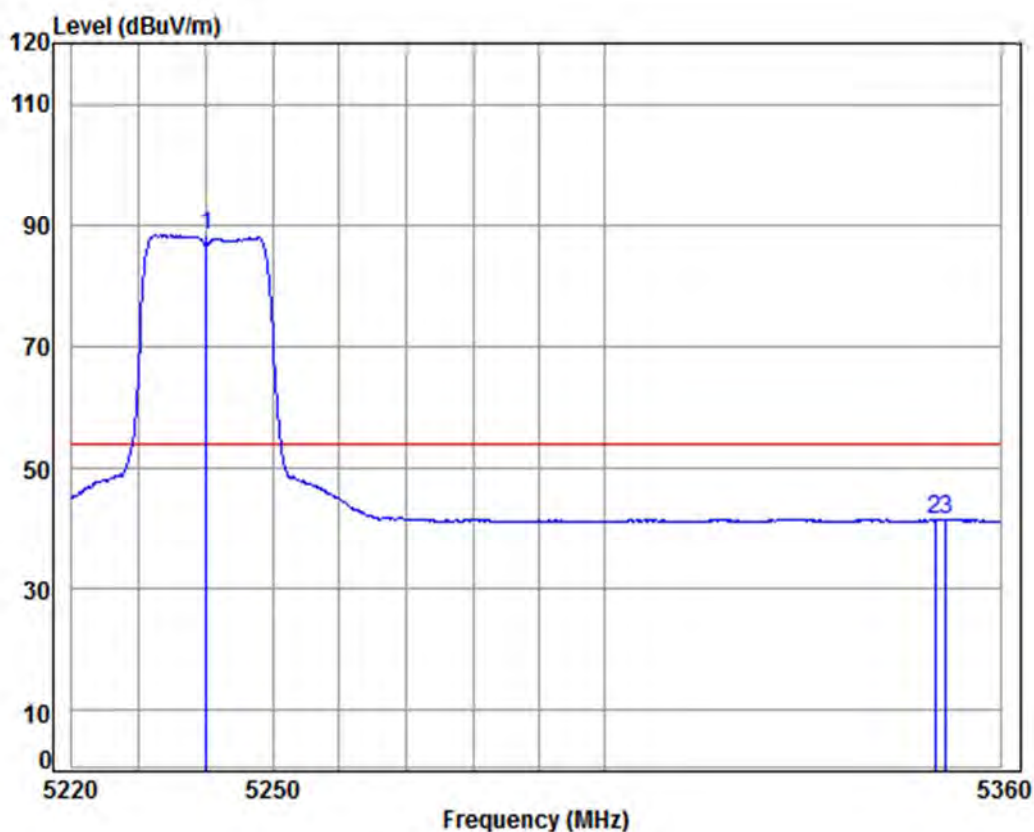

Condition: 3m VERTICAL
Job No : 09260RG
Mode : 5240 Band edge
: 5G WiFi 11AC20
: 12

		Cable	Ant	Preamp	Read	Limit	Over	
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1	pp 5240.000	8.46	34.45	37.45	82.77	88.23	54.00	34.23 Average
2	5350.000	8.63	34.43	37.52	35.90	41.44	54.00	-12.56 Average
3	5351.637	8.63	34.43	37.52	36.14	41.68	54.00	-12.32 Average




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM170800926003

Page: 315 of 411

Test mode:	802.11ac(HT20)	Frequency(MHz):	5240	Peak	Horizontal
------------	----------------	-----------------	------	------	------------

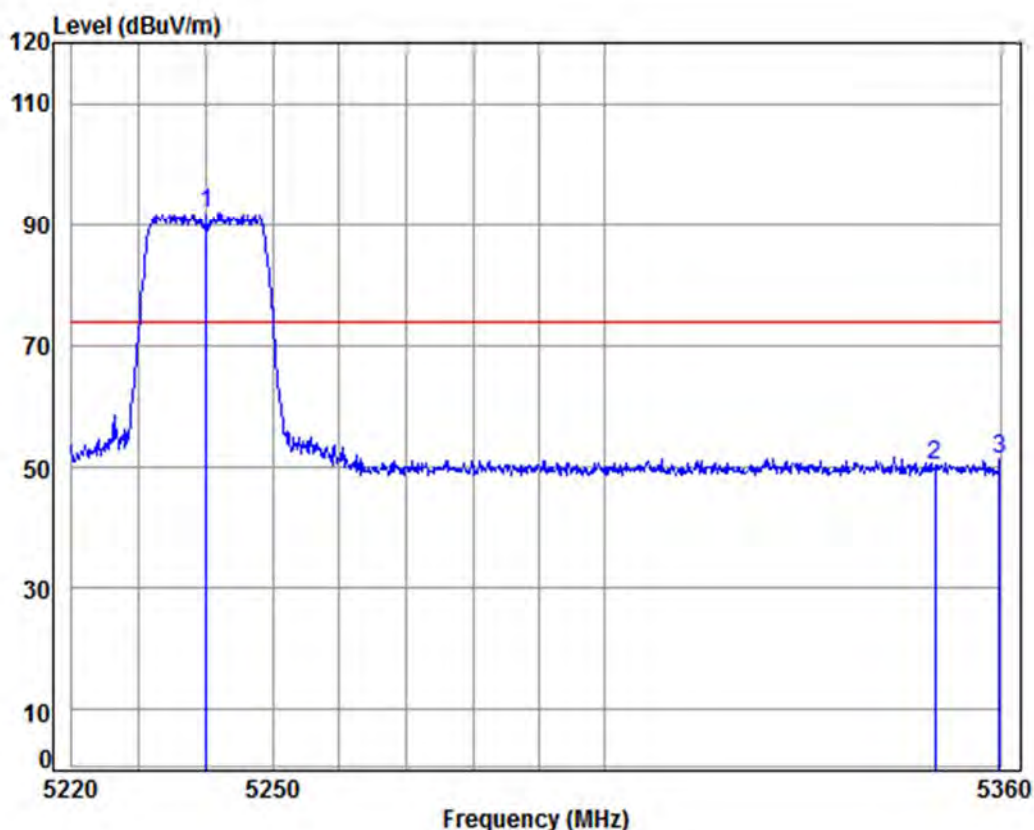

Condition: 3m HORIZONTAL
Job No : 09260RG
Mode : 5240 Band edge
: 5G WiFi 11AC20
: 12

		Cable	Ant	Preamp	Read	Limit	Over	
	Freq	Loss	Factor	Factor	Level	Level	Line	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1	pp 5240.000	8.46	34.45	37.45	86.43	91.89	74.00	17.89 peak
2	5350.000	8.63	34.43	37.52	44.82	50.36	74.00	-23.64 peak
3	5359.858	8.64	34.43	37.53	45.76	51.30	74.00	-22.70 peak




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM170800926003

Page: 316 of 411

Test mode:	802.11ac(HT20)	Frequency(MHz):	5240	Average	Horizontal
------------	----------------	-----------------	------	---------	------------

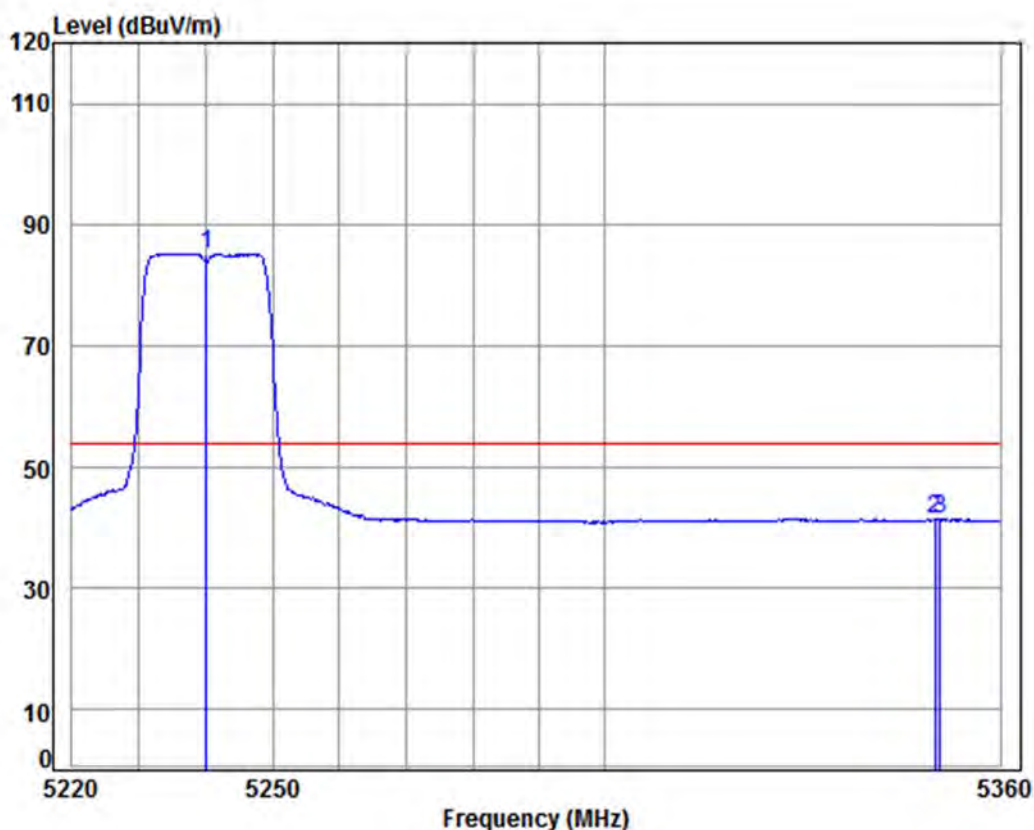

Condition: 3m HORIZONTAL
Job No : 09260RG
Mode : 5240 Band edge
: 5G WiFi 11AC20
: 12

		Cable	Ant	Preamp	Read	Limit	Over	
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1	pp 5240.000	8.46	34.45	37.45	79.63	85.09	54.00	31.09 Average
2	5350.000	8.63	34.43	37.52	35.84	41.38	54.00	-12.62 Average
3	5350.787	8.63	34.43	37.52	35.91	41.45	54.00	-12.55 Average




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM170800926003

Page: 317 of 411

Test mode:	802.11ac(HT20)	Frequency(MHz):	5260	Peak	Vertical
------------	----------------	-----------------	------	------	----------

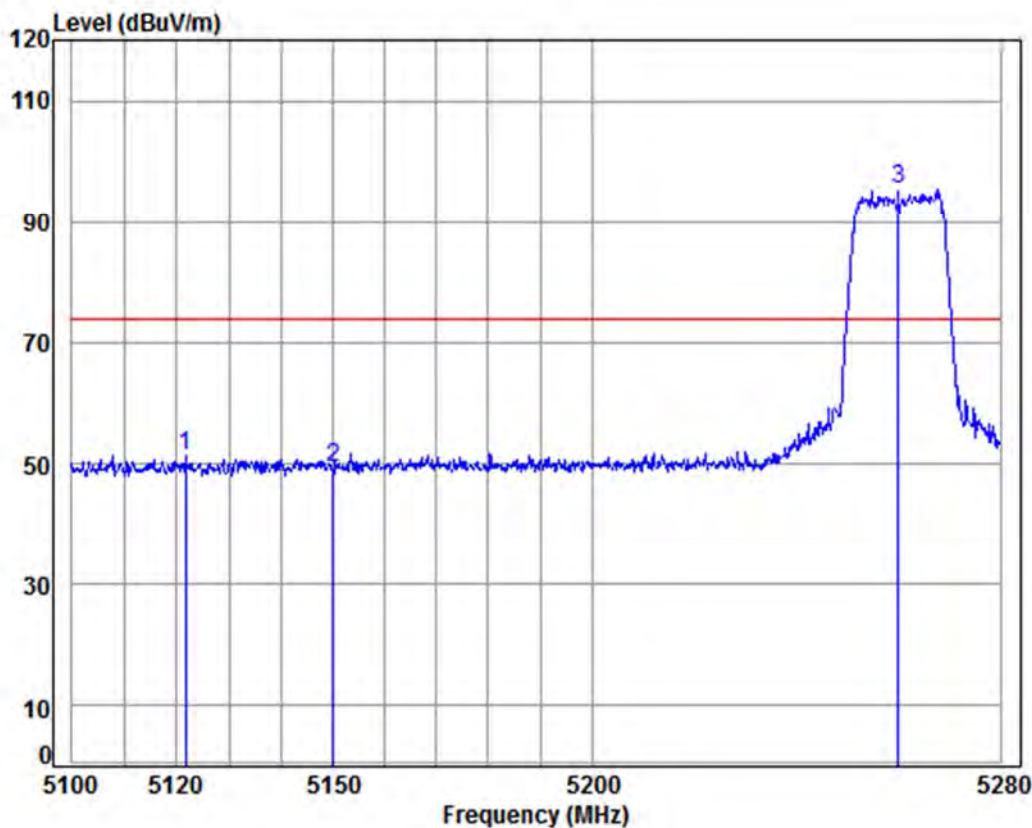

Condition: 3m VERTICAL
Job No : 09260RG
Mode : 5260 Band edge
: 5G WiFi 11AC20
: 12

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	5121.805	8.28	34.47	37.38	46.08	51.45	74.00	-22.55	Peak
2	5150.000	8.33	34.47	37.40	43.93	49.33	74.00	-24.67	Peak
3	pp 5260.000	8.49	34.45	37.47	90.03	95.50	74.00	21.50	Peak




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM170800926003

Page: 318 of 411

Test mode:	802.11ac(HT20)	Frequency(MHz):	5260	Average	Vertical
------------	----------------	-----------------	------	---------	----------

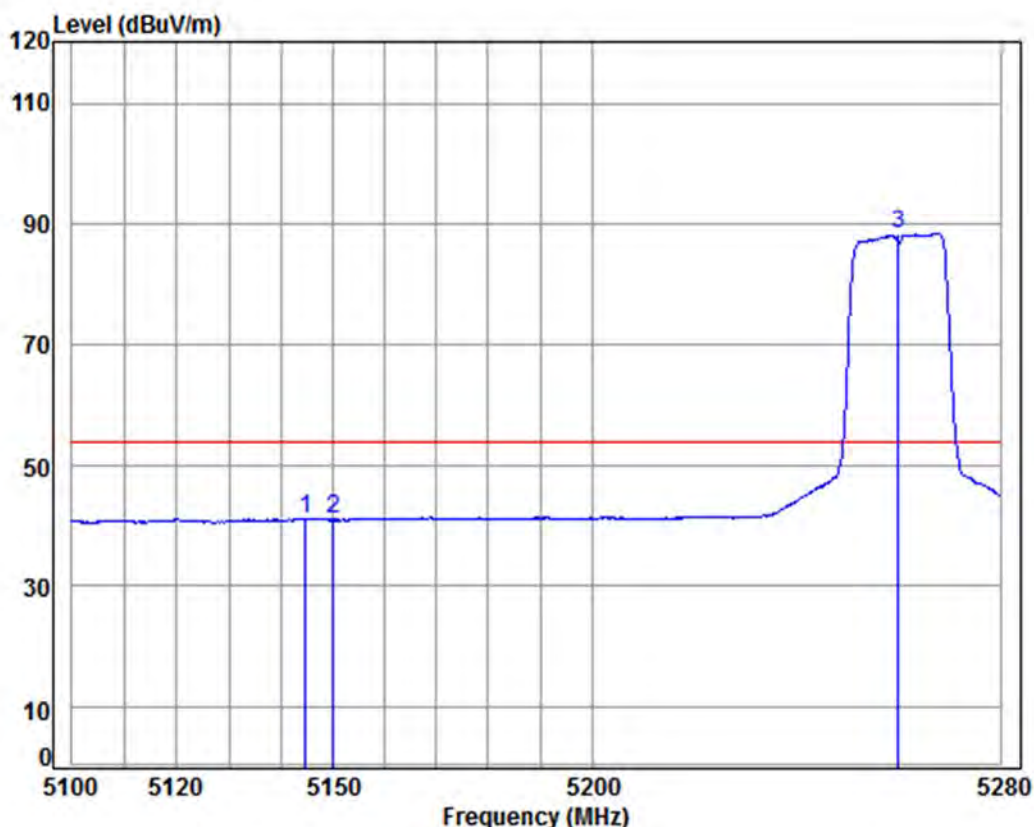

Condition: 3m VERTICAL
Job No : 09260RG
Mode : 5260 Band edge
: 5G WiFi 11AC20
: 12

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	5144.773	8.32	34.47	37.39	35.89	41.29	54.00	-12.71	Average
2	5150.000	8.33	34.47	37.40	35.69	41.09	54.00	-12.91	Average
3 pp	5260.000	8.49	34.45	37.47	82.79	88.26	54.00	34.26	Average




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM170800926003

Page: 319 of 411

Test mode:	802.11ac(HT20)	Frequency(MHz):	5260	Peak	Horizontal
------------	----------------	-----------------	------	------	------------

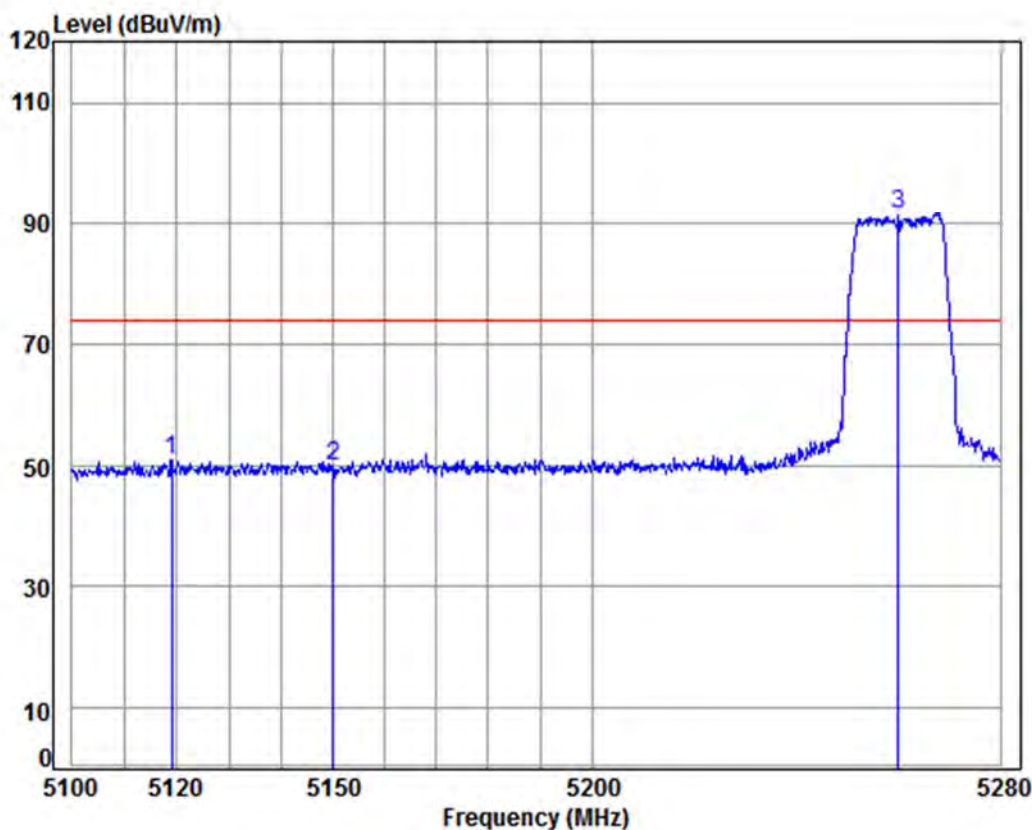

Condition: 3m HORIZONTAL
Job No : 09260RG
Mode : 5260 Band edge
: 5G WiFi 11AC20
: 12

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	5119.141	8.28	34.48	37.38	45.53	50.91	74.00	-23.09	peak
2	5150.000	8.33	34.47	37.40	44.70	50.10	74.00	-23.90	peak
3 pp	5260.000	8.49	34.45	37.47	86.22	91.69	74.00	17.69	peak




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM170800926003

Page: 320 of 411

Test mode:	802.11ac(HT20)	Frequency(MHz):	5260	Average	Horizontal
------------	----------------	-----------------	------	---------	------------

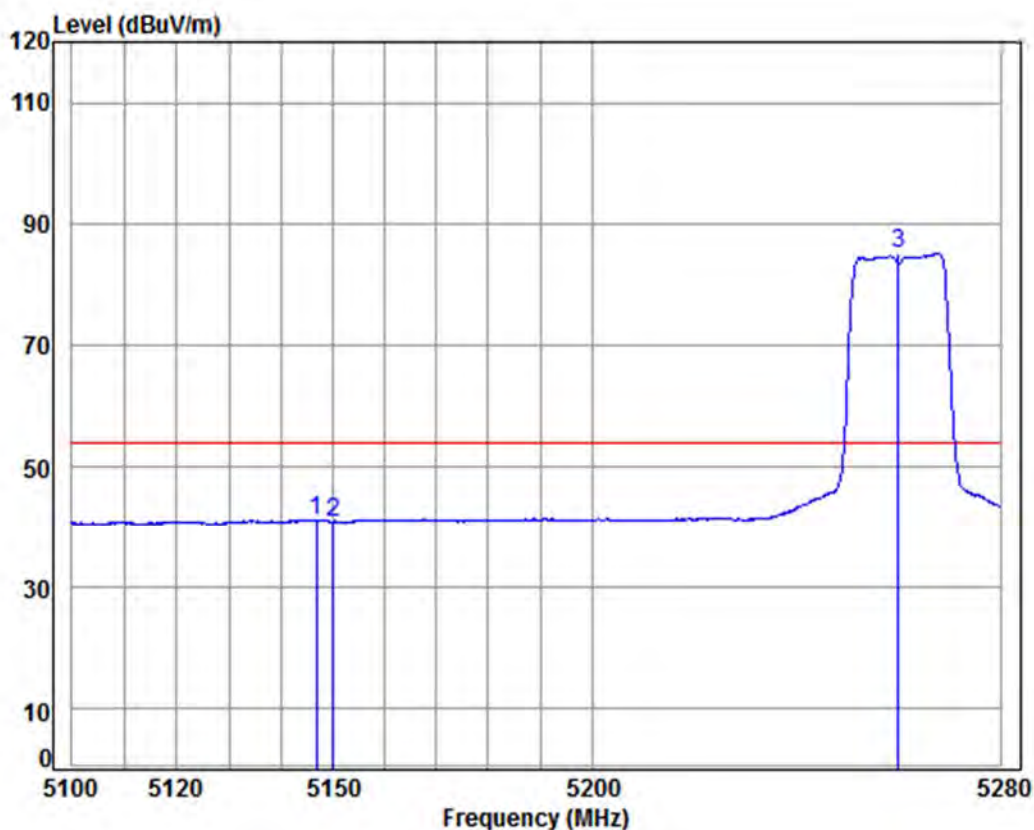

Condition: 3m HORIZONTAL
Job No : 09260RG
Mode : 5260 Band edge
: 5G WiFi 11AC20
: 12

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	5146.737	8.32	34.47	37.40	35.81	41.20	54.00	-12.80	Average
2	5150.000	8.33	34.47	37.40	35.61	41.01	54.00	-12.99	Average
3	pp 5260.000	8.49	34.45	37.47	79.65	85.12	54.00	31.12	Average