




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM170800926003

Page: 321 of 411

Test mode:	802.11ac(HT20)	Frequency(MHz):	5320	Peak	Vertical
------------	----------------	-----------------	------	------	----------

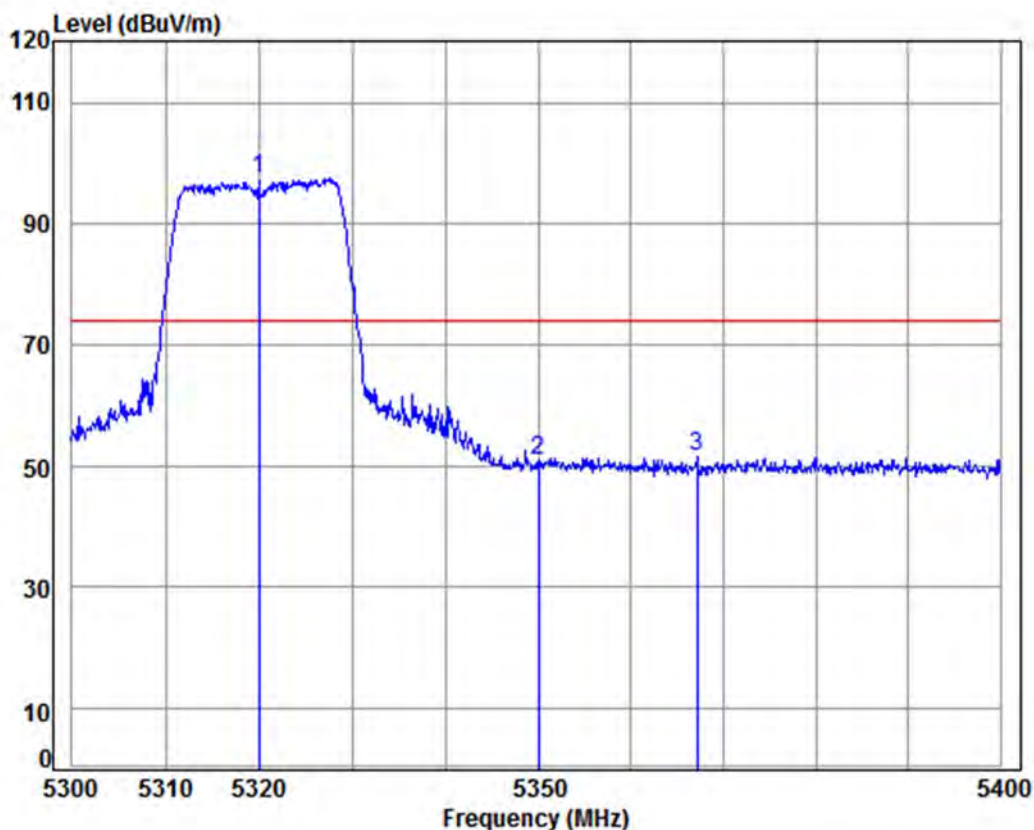

Condition: 3m VERTICAL
Job No : 09260RG
Mode : 5320 Band edge
: 5G WiFi 11AC20
: 12

		Cable	Ant	Preamp	Read	Limit	Over	
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1	pp 5320.000	8.58	34.43	37.50	92.04	97.55	74.00	23.55 Peak
2	5350.000	8.63	34.43	37.52	45.60	51.14	74.00	-22.86 Peak
3	5367.094	8.65	34.43	37.53	46.02	51.57	74.00	-22.43 Peak




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM170800926003

Page: 322 of 411

Test mode:	802.11ac(HT20)	Frequency(MHz):	5320	Average	Vertical
------------	----------------	-----------------	------	---------	----------

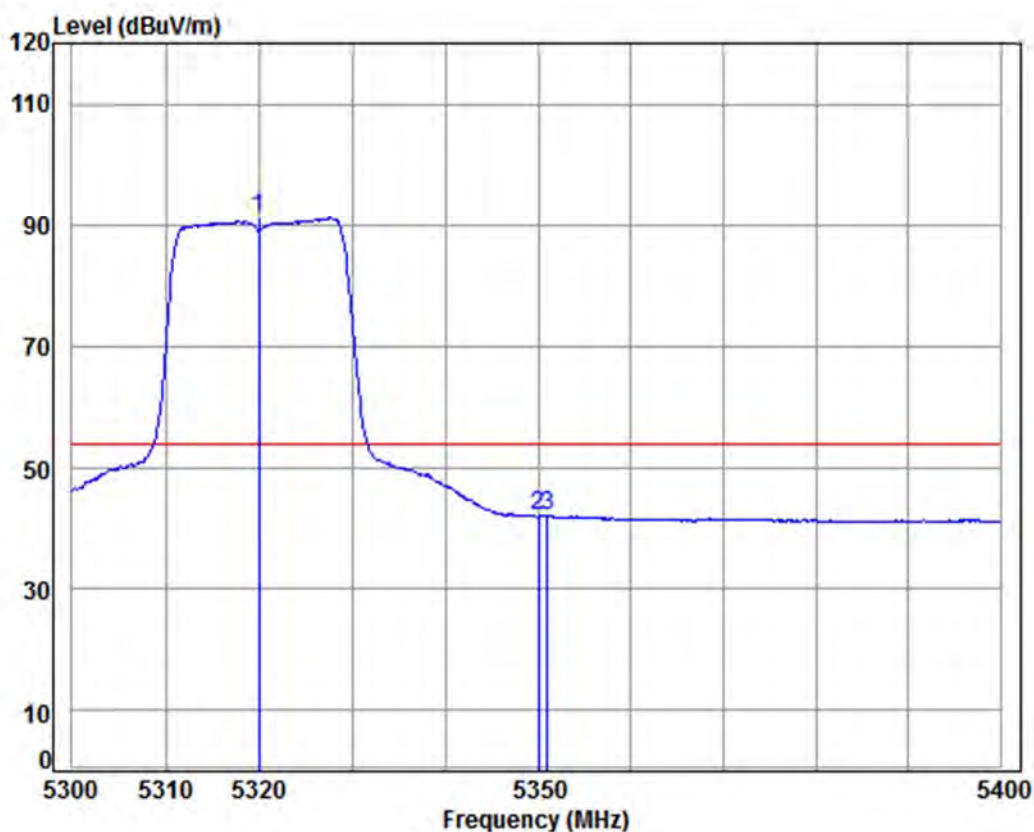

Condition: 3m VERTICAL

Job No : 09260RG

Mode : 5320 Band edge

: 5G WiFi 11AC20

: 12

		Cable	Ant	Preamp	Read	Limit	Over	
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1	pp 5320.000	8.58	34.43	37.50	85.60	91.11	54.00	37.11 Average
2	5350.000	8.63	34.43	37.52	36.62	42.16	54.00	-11.84 Average
3	5350.966	8.63	34.43	37.52	36.65	42.19	54.00	-11.81 Average




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM170800926003

Page: 323 of 411

Test mode:	802.11ac(HT20)	Frequency(MHz):	5320	Peak	Horizontal
------------	----------------	-----------------	------	------	------------

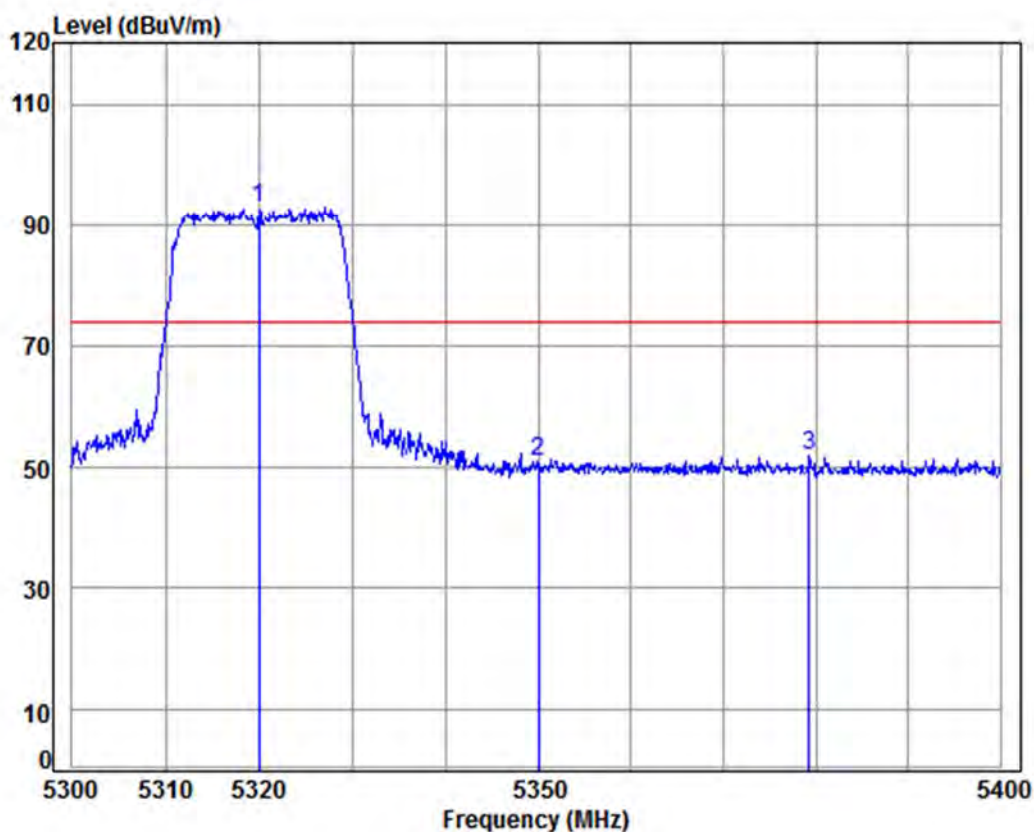

Condition: 3m HORIZONTAL
Job No : 09260RG
Mode : 5320 Band edge
: 5G WiFi 11AC20
: 12

		Cable	Ant	Preamp	Read	Limit	Over	
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1	pp 5320.000	8.58	34.43	37.50	87.28	92.79	74.00	18.79 peak
2	5350.000	8.63	34.43	37.52	45.48	51.02	74.00	-22.98 peak
3	5379.247	8.67	34.42	37.54	46.35	51.90	74.00	-22.10 peak




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM170800926003

Page: 324 of 411

Test mode:	802.11ac(HT20)	Frequency(MHz):	5320	Average	Horizontal
------------	----------------	-----------------	------	---------	------------

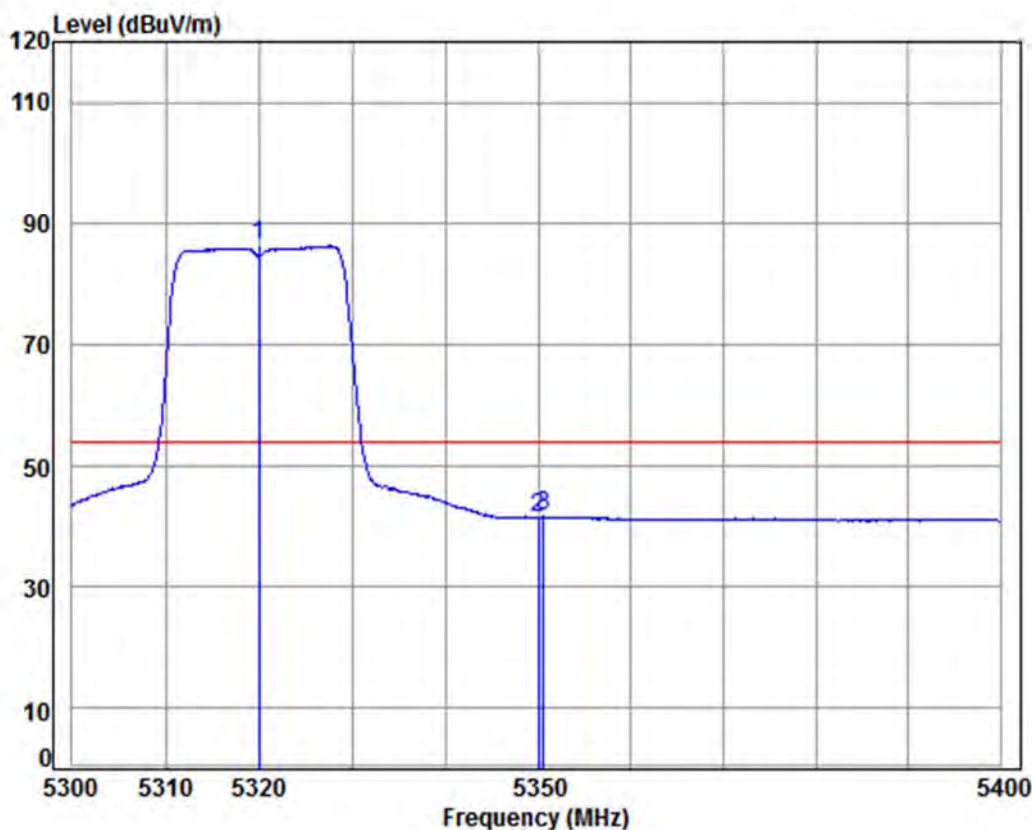

Condition: 3m HORIZONTAL
Job No : 09260RG
Mode : 5320 Band edge
: 5G WiFi 11AC20
: 12

		Cable	Ant	Preamp	Read	Limit	Over	
	Freq	Loss	Factor	Factor	Level	Line	Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1 pp	5320.000	8.58	34.43	37.50	80.73	86.24	54.00	32.24 Average
2	5350.000	8.63	34.43	37.52	36.13	41.67	54.00	-12.33 Average
3	5350.566	8.63	34.43	37.52	36.17	41.71	54.00	-12.29 Average




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM170800926003

Page: 325 of 411

Test mode:	802.11ac(HT20)	Frequency(MHz):	5500	Peak	Vertical
------------	----------------	-----------------	------	------	----------

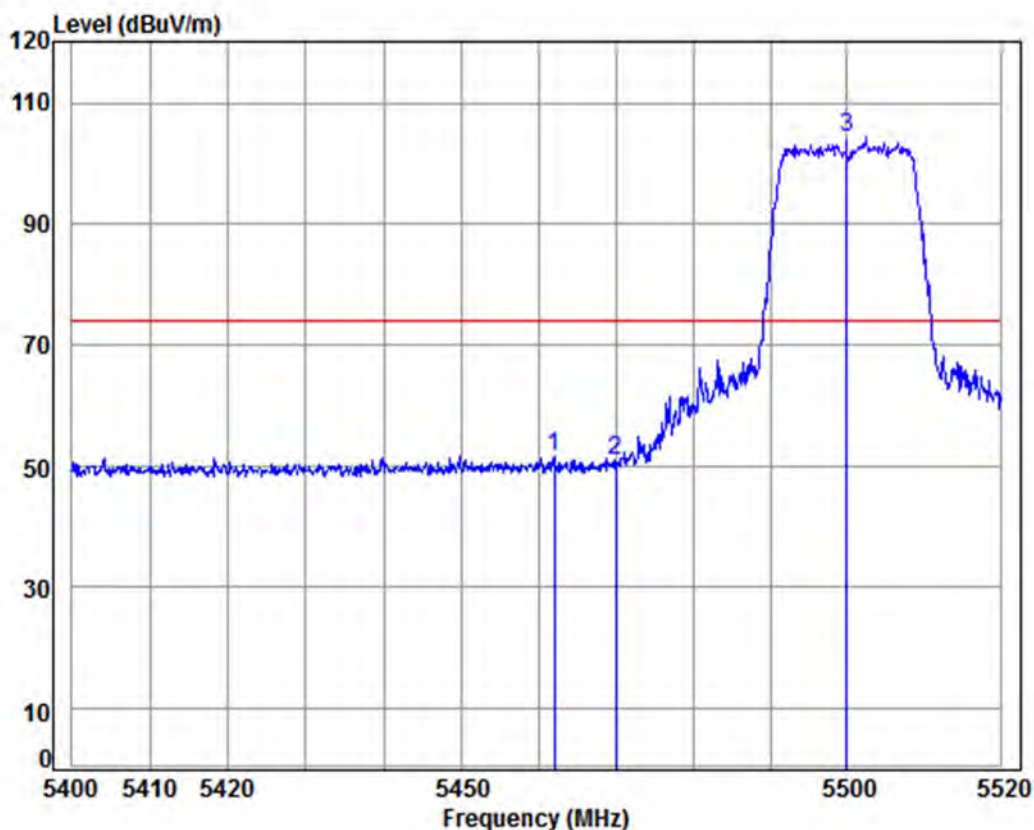

Condition: 3m VERTICAL
Job No : 09260RG
Mode : 5500 Band edge
: 5G WiFi 11AC20
: 12

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	5462.071	8.79	34.41	37.59	46.00	51.61	74.00	-22.39	Peak
2	5470.000	8.81	34.41	37.60	45.31	50.93	74.00	-23.07	Peak
3 pp	5500.000	8.85	34.40	37.61	98.51	104.15	74.00	30.15	Peak




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM170800926003

Page: 326 of 411

Test mode:	802.11ac(HT20)	Frequency(MHz):	5500	Average	Vertical
------------	----------------	-----------------	------	---------	----------

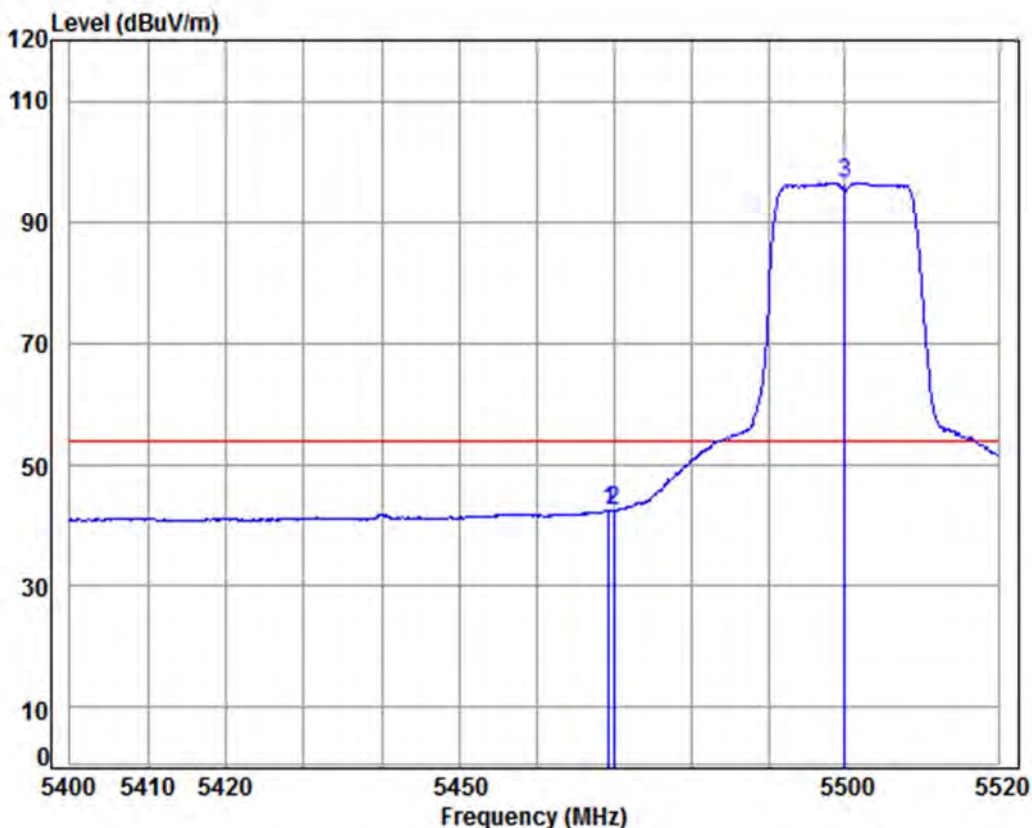

Condition: 3m VERTICAL
Job No : 09260RG
Mode : 5500 Band edge
: 5G WiFi 11AC20
: 12

	Freq	Cable Loss	Ant Factor	Preamplifier Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	5469.399	8.81	34.41	37.60	36.98	42.60	54.00	-11.40	Average
2	5470.000	8.81	34.41	37.60	36.96	42.58	54.00	-11.42	Average
3	pp 5500.000	8.85	34.40	37.61	90.90	96.54	54.00	42.54	Average




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM170800926003

Page: 327 of 411

Test mode:	802.11ac(HT20)	Frequency(MHz):	5500	Peak	Horizontal
------------	----------------	-----------------	------	------	------------

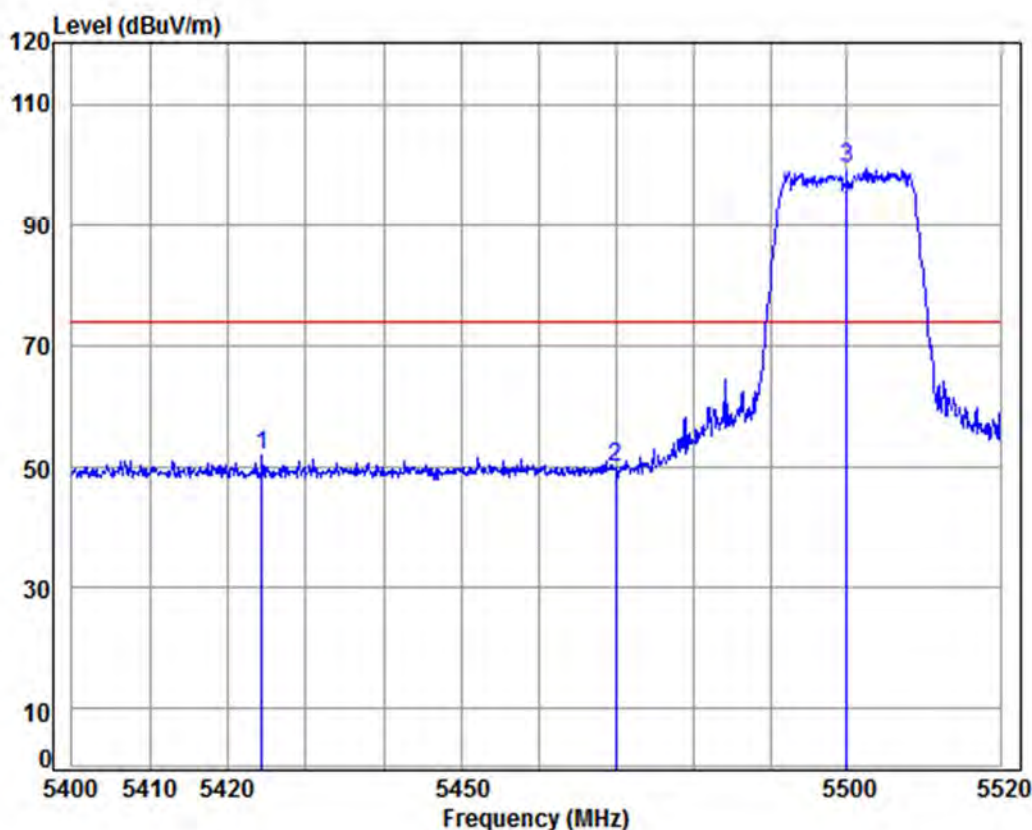

Condition: 3m HORIZONTAL
Job No : 09260RG
Mode : 5500 Band edge
: 5G WiFi 11AC20
: 12

	Freq	Cable	Ant	Preamp	Read	Limit	Over	
	MHz	Loss	Factor	Factor	Level	Level	Line	Limit Remark
		dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1	5424.386	8.74	34.41	37.57	46.35	51.93	74.00	-22.07 peak
2	5470.000	8.81	34.41	37.60	44.47	50.09	74.00	-23.91 peak
3 pp	5500.000	8.85	34.40	37.61	93.67	99.31	74.00	25.31 peak




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM170800926003

Page: 328 of 411

Test mode:	802.11ac(HT20)	Frequency(MHz):	5500	Average	Horizontal
------------	----------------	-----------------	------	---------	------------

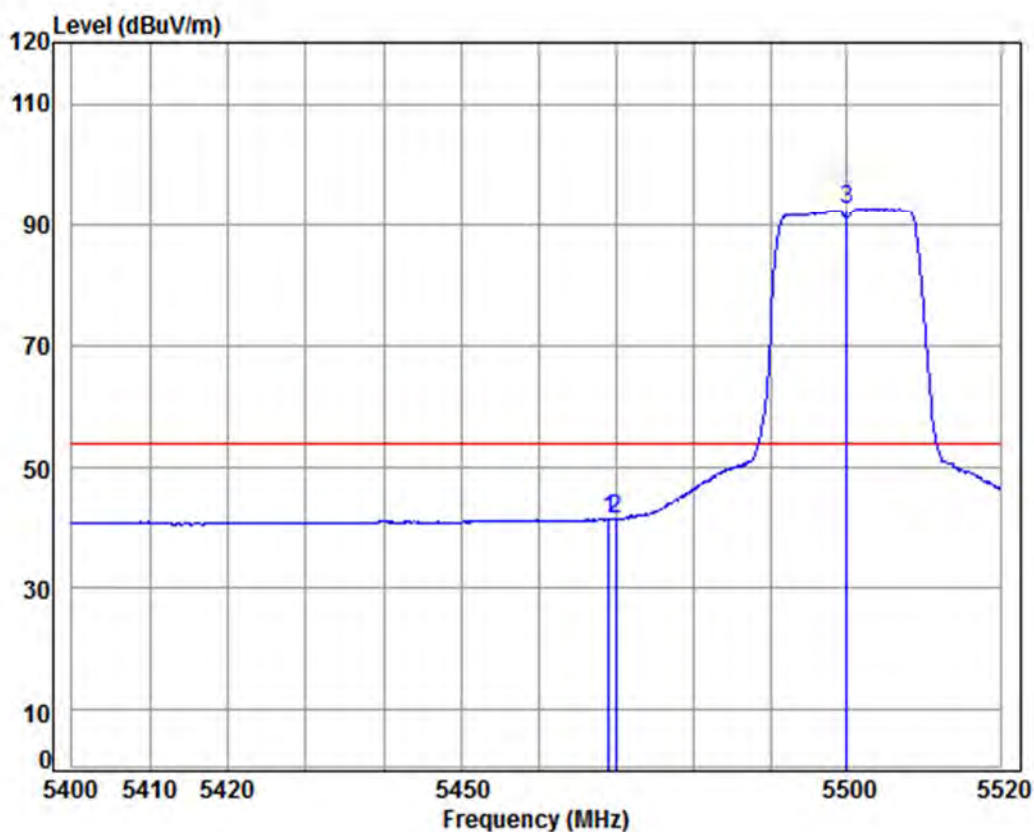

Condition: 3m HORIZONTAL
Job No : 09260RG
Mode : 5500 Band edge
: 5G WiFi 11AC20
: 12

	Freq	Cable	Ant	Preamp	Read	Limit	Over	
	MHz	Loss	Factor	Factor	Level	Line	Limit	Remark
		dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1	5469.158	8.81	34.41	37.60	35.91	41.53	54.00	-12.47 Average
2	5470.000	8.81	34.41	37.60	36.02	41.64	54.00	-12.36 Average
3 pp	5500.000	8.85	34.40	37.61	86.99	92.63	54.00	38.63 Average




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM170800926003

Page: 329 of 411

Test mode:	802.11ac(HT20)	Frequency(MHz):	5700	Peak	Vertical
------------	----------------	-----------------	------	------	----------

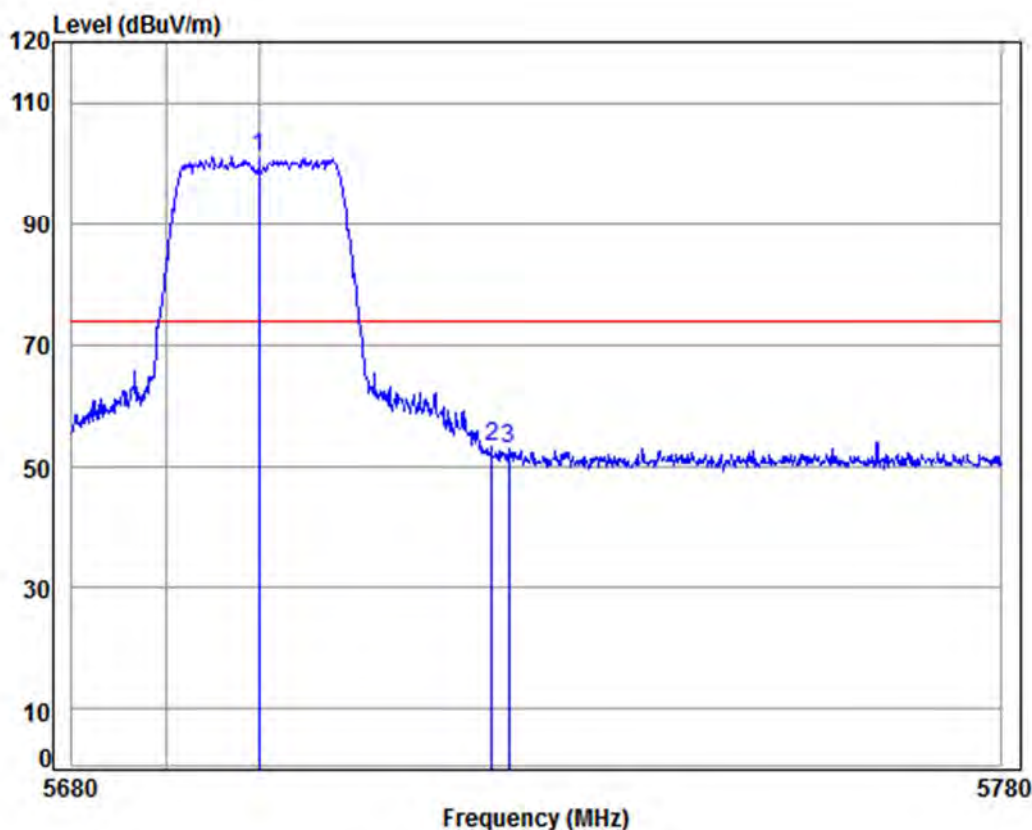

Condition: 3m VERTICAL
Job No : 09260RG
Mode : 5700 Band edge
: 5G WiFi 11AC20
: 12

		Cable	Ant	Preamp	Read	Limit	Over	
	Freq	Loss	Factor	Factor	Level	Line	Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1 pp	5700.000	9.56	34.52	37.73	94.76	101.11	74.00	27.11 Peak
2	5725.000	9.64	34.54	37.75	46.84	53.27	74.00	-20.73 Peak
3	5726.883	9.65	34.54	37.75	46.57	53.01	74.00	-20.99 Peak




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM170800926003

Page: 330 of 411

Test mode:	802.11ac(HT20)	Frequency(MHz):	5700	Average	Vertical
------------	----------------	-----------------	------	---------	----------

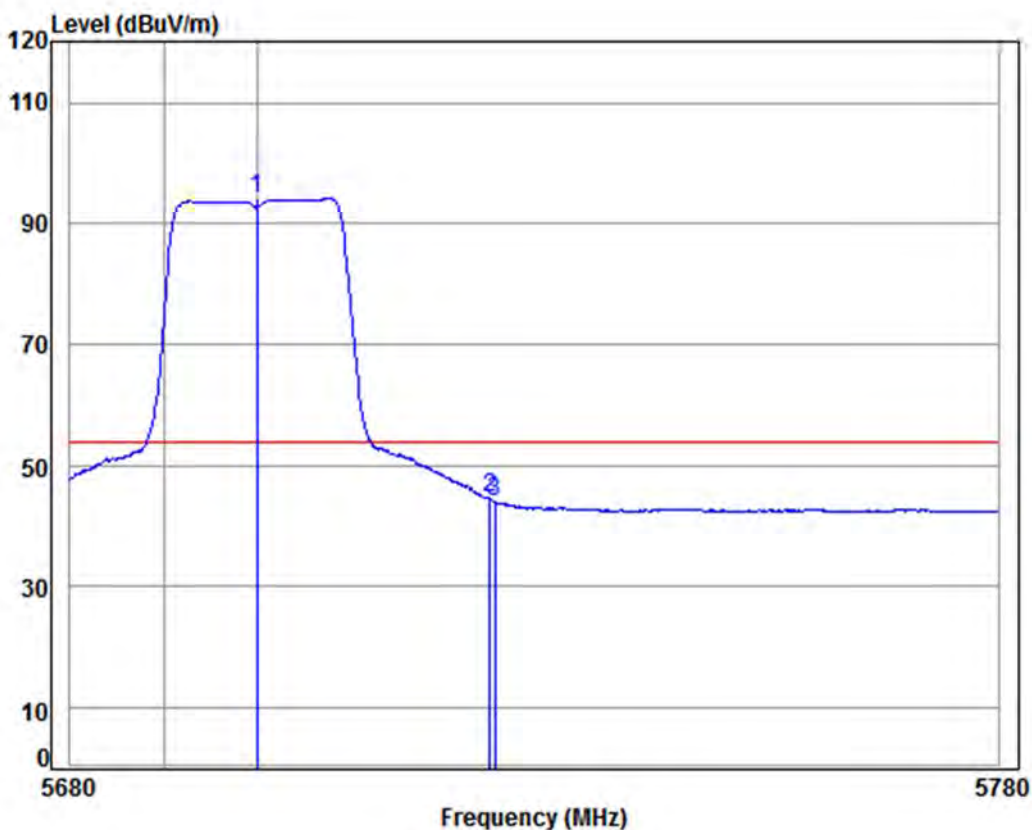

Condition: 3m VERTICAL
Job No : 09260RG
Mode : 5700 Band edge
: 5G WiFi 11AC20
: 12

		Cable	Ant	Preamp	Read	Limit	Over	
	Freq	Loss	Factor	Factor	Level	Line	Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1 pp	5700.000	9.56	34.52	37.73	87.80	94.15	54.00	40.15 Average
2	5725.000	9.64	34.54	37.75	38.34	44.77	54.00	-9.23 Average
3	5725.583	9.64	34.54	37.75	37.68	44.11	54.00	-9.89 Average




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM170800926003

Page: 331 of 411

Test mode:	802.11ac(HT20)	Frequency(MHz):	5700	Peak	Horizontal
------------	----------------	-----------------	------	------	------------

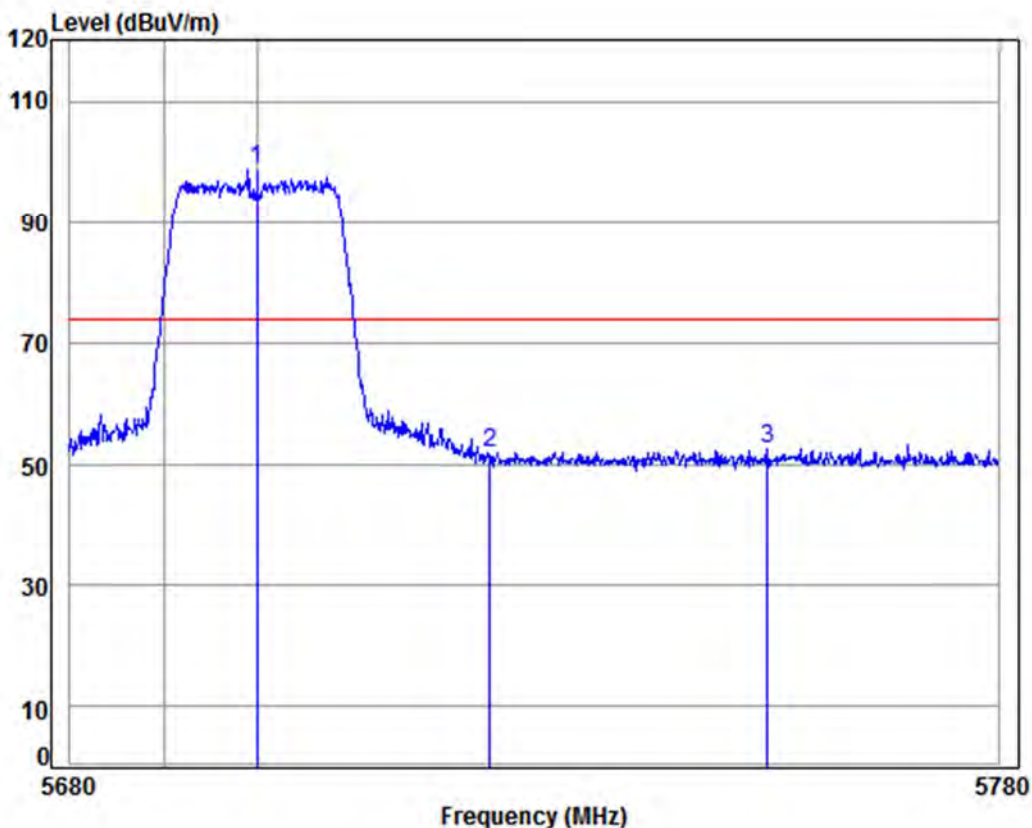

Condition: 3m HORIZONTAL
Job No : 09260RG
Mode : 5700 Band edge
: 5G WiFi 11AC20
: 12

		Cable	Ant	Preamp	Read	Limit	Over	
	Freq	Loss	Factor	Factor	Level	Line	Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1 pp	5700.000	9.56	34.52	37.73	92.54	98.89	74.00	24.89 peak
2	5725.000	9.64	34.54	37.75	45.48	51.91	74.00	-22.09 peak
3	5754.937	9.75	34.56	37.76	46.19	52.74	74.00	-21.26 peak




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM170800926003

Page: 332 of 411

Test mode:	802.11ac(HT20)	Frequency(MHz):	5700	Average	Horizontal
------------	----------------	-----------------	------	---------	------------

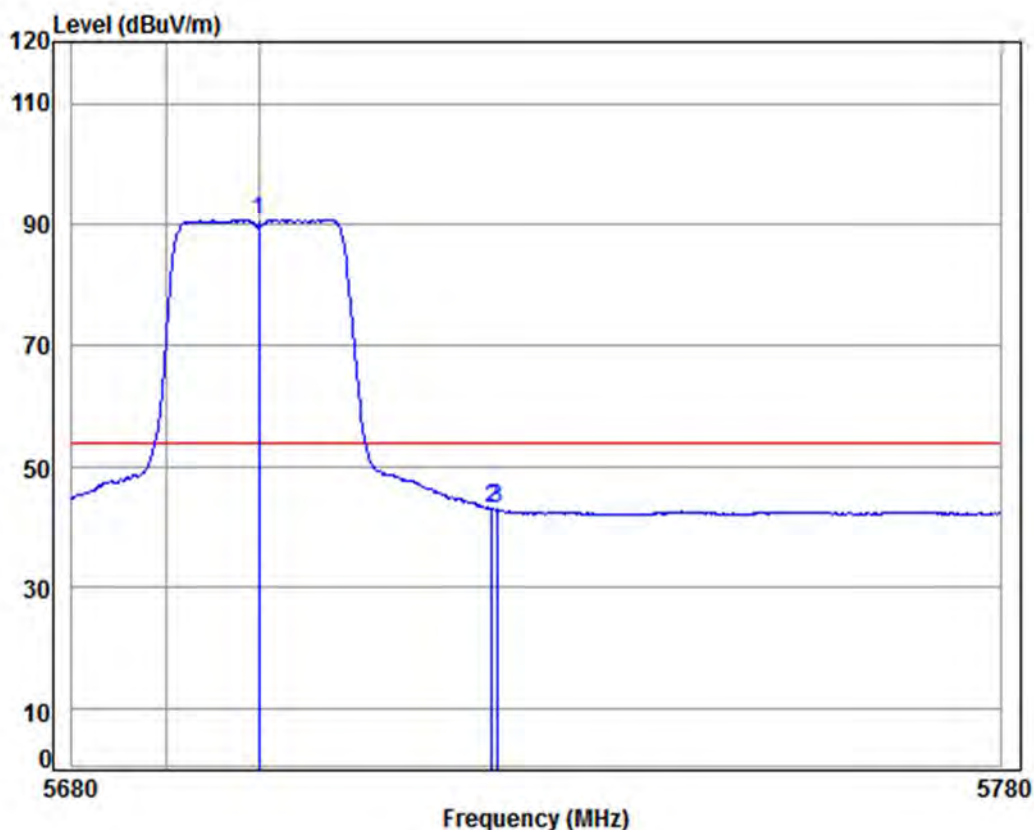

Condition: 3m HORIZONTAL
Job No : 09260RG
Mode : 5700 Band edge
: 5G WiFi 11AC20
: 12

		Cable	Ant	Preamp	Read	Limit	Over	
	Freq	Loss	Factor	Factor	Level	Line	Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1 pp	5700.000	9.56	34.52	37.73	84.28	90.63	54.00	36.63 Average
2	5725.000	9.64	34.54	37.75	36.85	43.28	54.00	-10.72 Average
3	5725.583	9.64	34.54	37.75	36.61	43.04	54.00	-10.96 Average




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM170800926003

Page: 333 of 411

Test mode:	802.11ac(HT20)	Frequency(MHz):	5745	Peak	Vertical
------------	----------------	-----------------	------	------	----------

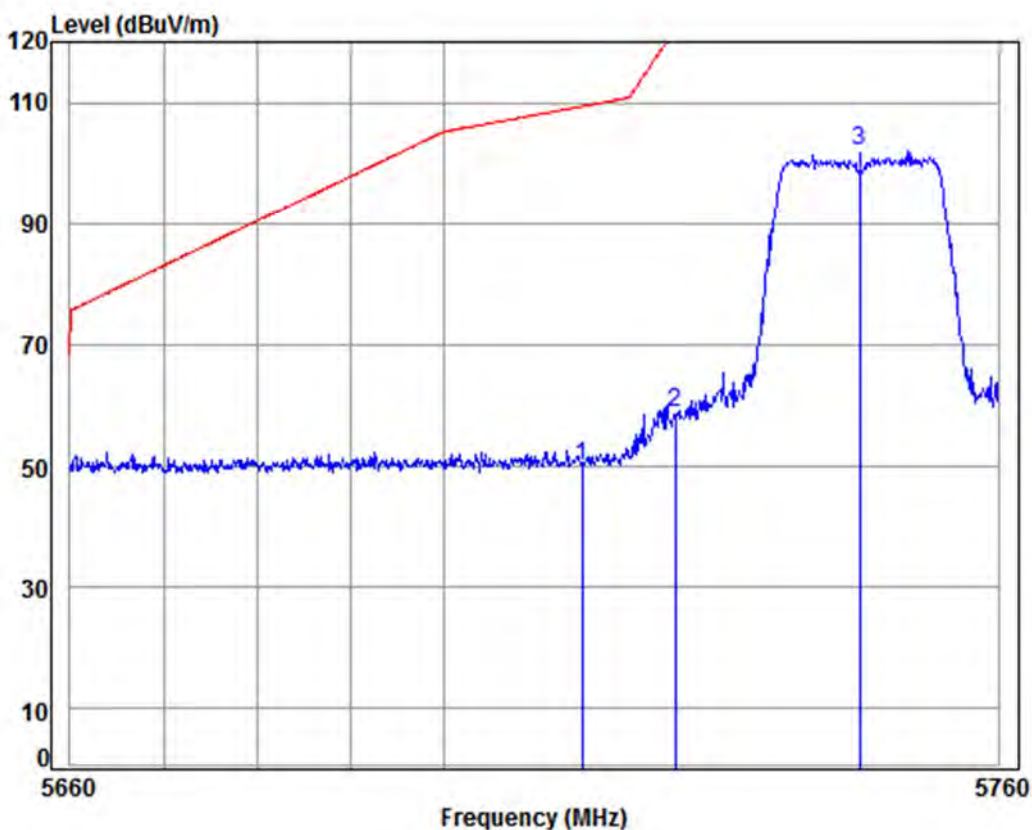

Condition: 3m VERTICAL

Job No : 09260RG

Mode : 5745 Band edge

: 5G WiFi 11AC20

		Cable	Ant	Preamp	Read	Limit	Over	
	Freq	Loss	Factor	Factor	Level	Level	Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1	5715.000	9.61	34.53	37.74	43.53	49.93	109.40	-59.47 peak
2	5725.000	9.64	34.54	37.75	52.36	58.79	122.20	-63.41 peak
3 pp	5745.000	9.71	34.55	37.76	95.44	101.94	125.20	-23.26 peak




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM170800926003

Page: 334 of 411

Test mode:	802.11ac(HT20)	Frequency(MHz):	5745	Peak	Horizontal
------------	----------------	-----------------	------	------	------------

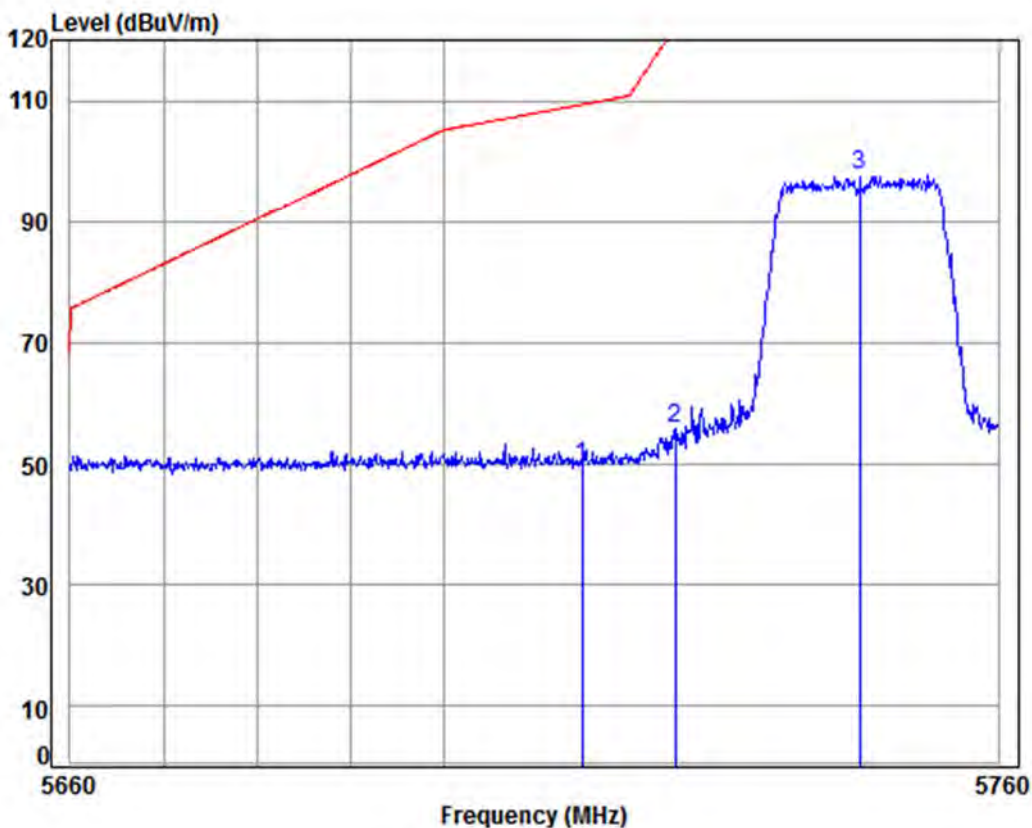

Condition: 3m HORIZONTAL

Job No : 09260RG

Mode : 5745 Band edge

: 5G WiFi 11AC20

		Cable	Ant	Preamp	Read	Limit	Over	
	Freq	Loss	Factor	Factor	Level	Line	Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1	5715.000	9.61	34.53	37.74	43.21	49.61	109.40	-59.79 peak
2	5725.000	9.64	34.54	37.75	49.34	55.77	122.20	-66.43 peak
3 pp	5745.000	9.71	34.55	37.76	91.14	97.64	125.20	-27.56 peak




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM170800926003

Page: 335 of 411

Test mode:	802.11ac(HT20)	Frequency(MHz):	5825	Peak	Vertical
------------	----------------	-----------------	------	------	----------

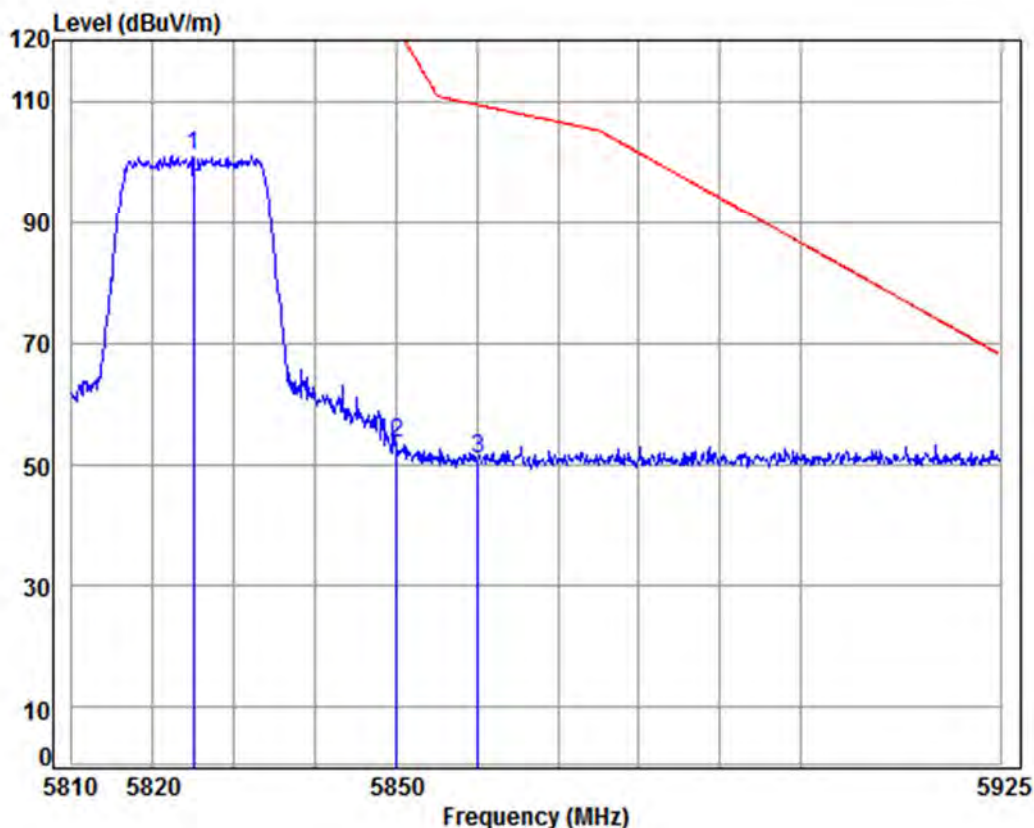

Condition: 3m VERTICAL
Job No : 09260RG
Mode : 5825 Band edge
: 5G WiFi 11AC20

		Cable	Ant	Preamp	Read	Limit	Over		
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1 pp	5825.000	9.98	34.60	37.80	94.37	101.15	125.20	-24.05	peak
2	5850.000	10.07	34.61	37.82	46.67	53.53	122.20	-68.67	peak
3	5860.000	10.10	34.62	37.82	44.10	51.00	109.40	-58.40	peak

Test mode:	802.11ac(HT20)	Frequency(MHz):	5825	Peak	Horizontal
------------	----------------	-----------------	------	------	------------


This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.



SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM170800926003

Page: 336 of 411

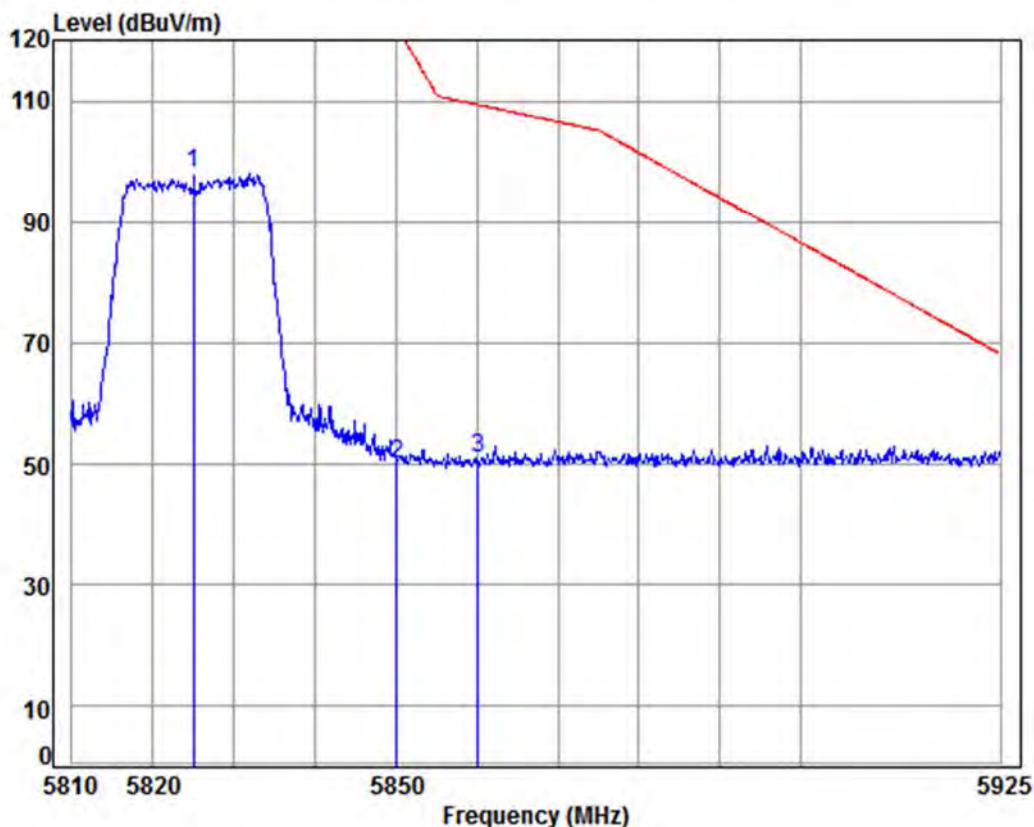

Condition: 3m HORIZONTAL

Job No : 09260RG

Mode : 5825 Band edge

: 5G WiFi 11AC20

		Cable	Ant	Preamp	Read	Limit	Over		
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	pp 5825.000	9.98	34.60	37.80	91.29	98.07	125.20	-27.13	peak :
2	5850.000	10.07	34.61	37.82	43.04	49.90	122.20	-72.30	peak :
3	5860.000	10.10	34.62	37.82	44.18	51.08	109.40	-58.32	peak




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM170800926003

Page: 337 of 411

Test mode:	802.11n(HT40)	Frequency(MHz):	5190	Peak	Vertical
------------	---------------	-----------------	------	------	----------

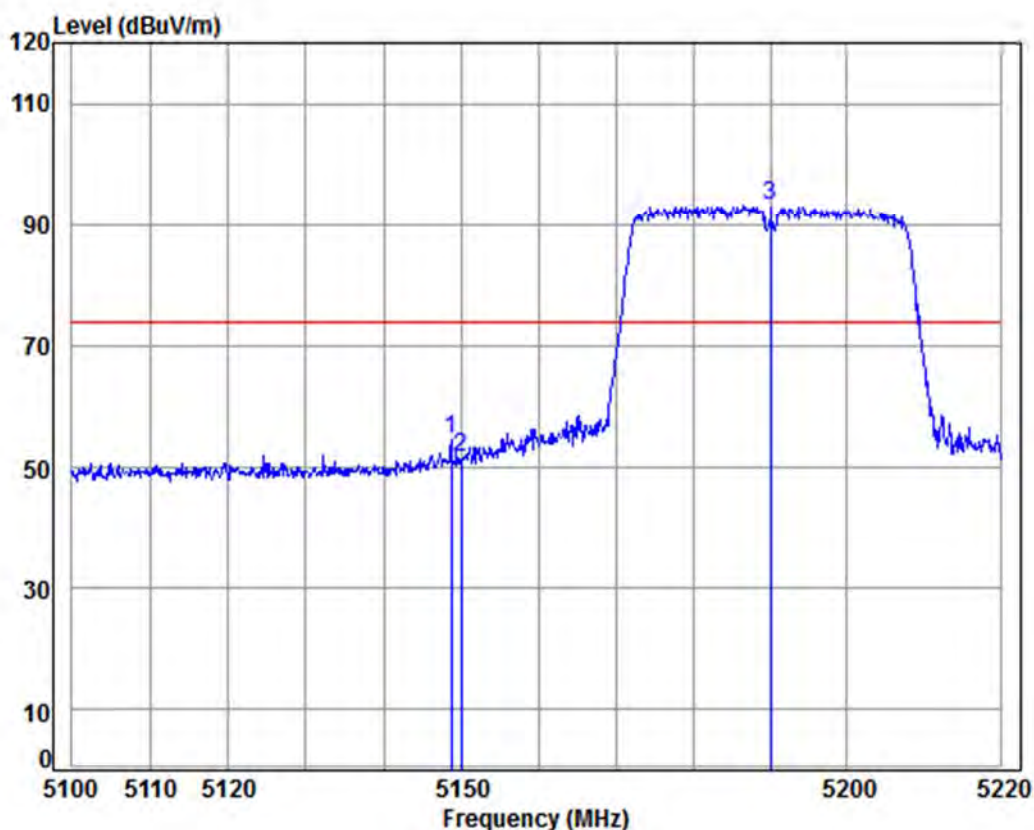

Condition: 3m VERTICAL

Job No : 09260RG

Mode : 5190 Band edge

: 5G WiFi 11AC40

: 12

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit	Over	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	5148.743	8.32	34.47	37.40	49.20	54.59	74.00	-19.41	Peak
2	5150.000	8.33	34.47	37.40	46.38	51.78	74.00	-22.22	Peak
3 pp	5190.000	8.39	34.46	37.42	87.72	93.15	74.00	19.15	Peak




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM170800926003

Page: 338 of 411

Test mode:	802.11n(HT40)	Frequency(MHz):	5190	Average	Vertical
------------	---------------	-----------------	------	---------	----------

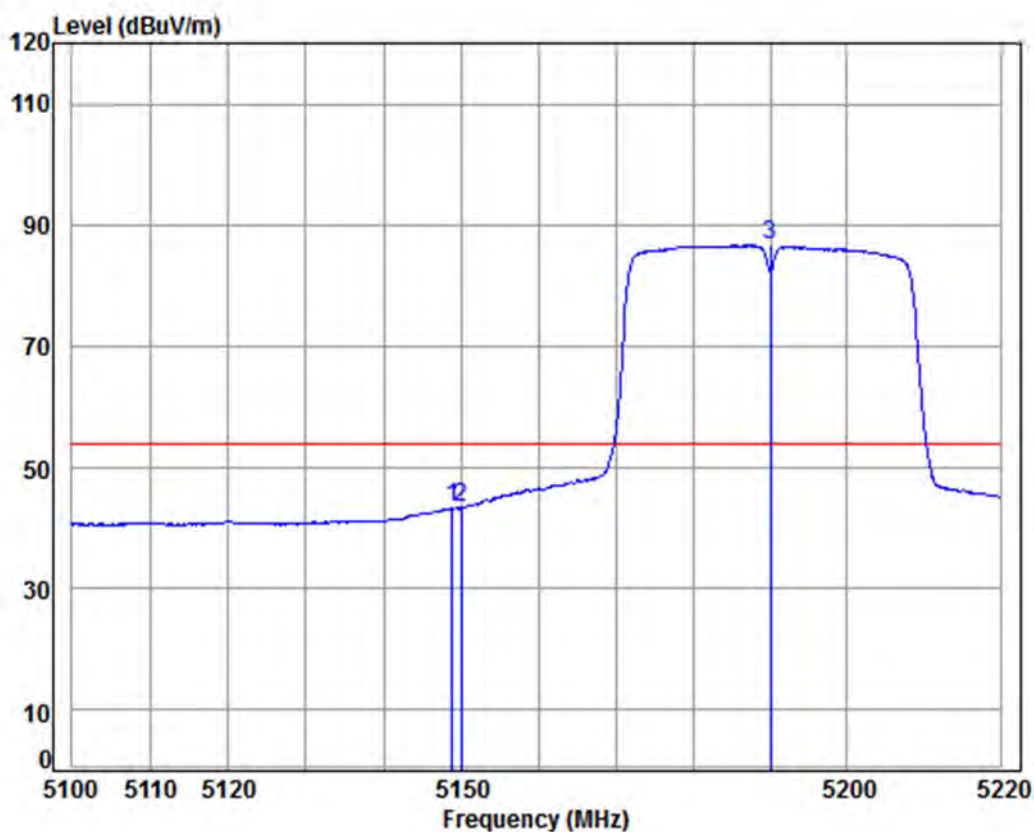

Condition: 3m VERTICAL

Job No : 09260RG

Mode : 5190 Band edge

: 5G WiFi 11AC40

: 12

	Freq	Cable	Ant	Preamp	Read	Limit	Over	
	MHz	Loss	Factor	Factor	Level	Line	Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1	5148.863	8.32	34.47	37.40	38.00	43.39	54.00	-10.61 Average
2	5150.000	8.33	34.47	37.40	38.12	43.52	54.00	-10.48 Average
3 pp	5190.000	8.39	34.46	37.42	81.11	86.54	54.00	32.54 Average




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM170800926003

Page: 339 of 411

Test mode:	802.11n(HT40)	Frequency(MHz):	5190	Peak	Horizontal
------------	---------------	-----------------	------	------	------------

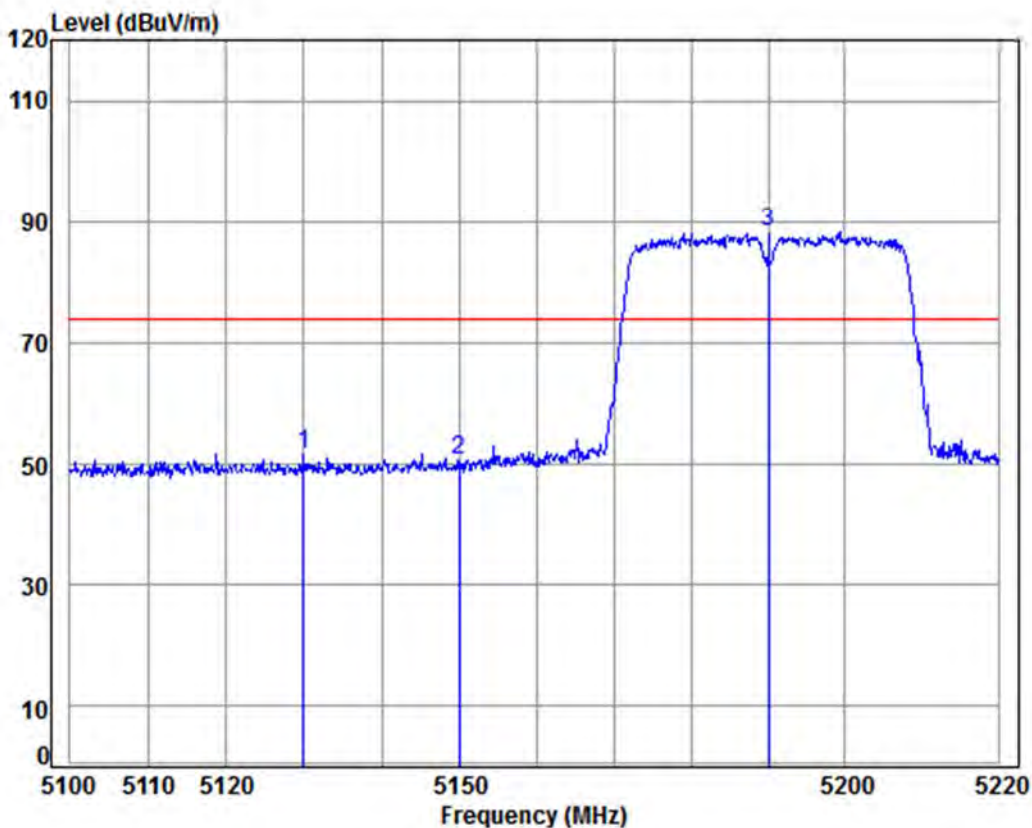

Condition: 3m HORIZONTAL
Job No : 09260RG
Mode : 5190 Band edge
: 5G WiFi 11AC40
: 12

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	5129.978	8.29	34.47	37.38	46.35	51.73	74.00	-22.27	peak
2	5150.000	8.33	34.47	37.40	45.25	50.65	74.00	-23.35	peak
3 pp	5190.000	8.39	34.46	37.42	82.85	88.28	74.00	14.28	peak




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM170800926003

Page: 340 of 411

Test mode:	802.11n(HT40)	Frequency(MHz):	5190	Average	Horizontal
------------	---------------	-----------------	------	---------	------------

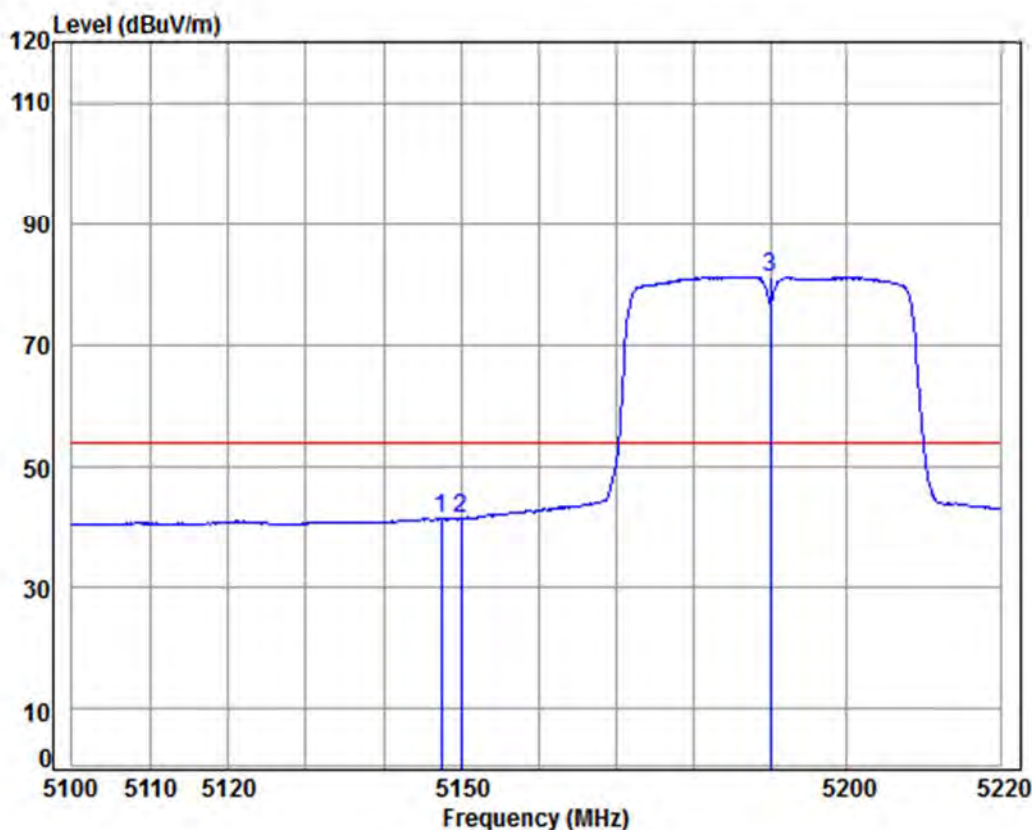

Condition: 3m HORIZONTAL
Job No : 09260RG
Mode : 5190 Band edge
: 5G WiFi 11AC40
: 12

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	5147.426	8.32	34.47	37.40	36.10	41.49	54.00	-12.51	Average
2	5150.000	8.33	34.47	37.40	36.06	41.46	54.00	-12.54	Average
3 pp	5190.000	8.39	34.46	37.42	75.81	81.24	54.00	27.24	Average




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM170800926003

Page: 341 of 411

Test mode:	802.11n(HT40)	Frequency(MHz):	5230	Peak	Vertical
------------	---------------	-----------------	------	------	----------

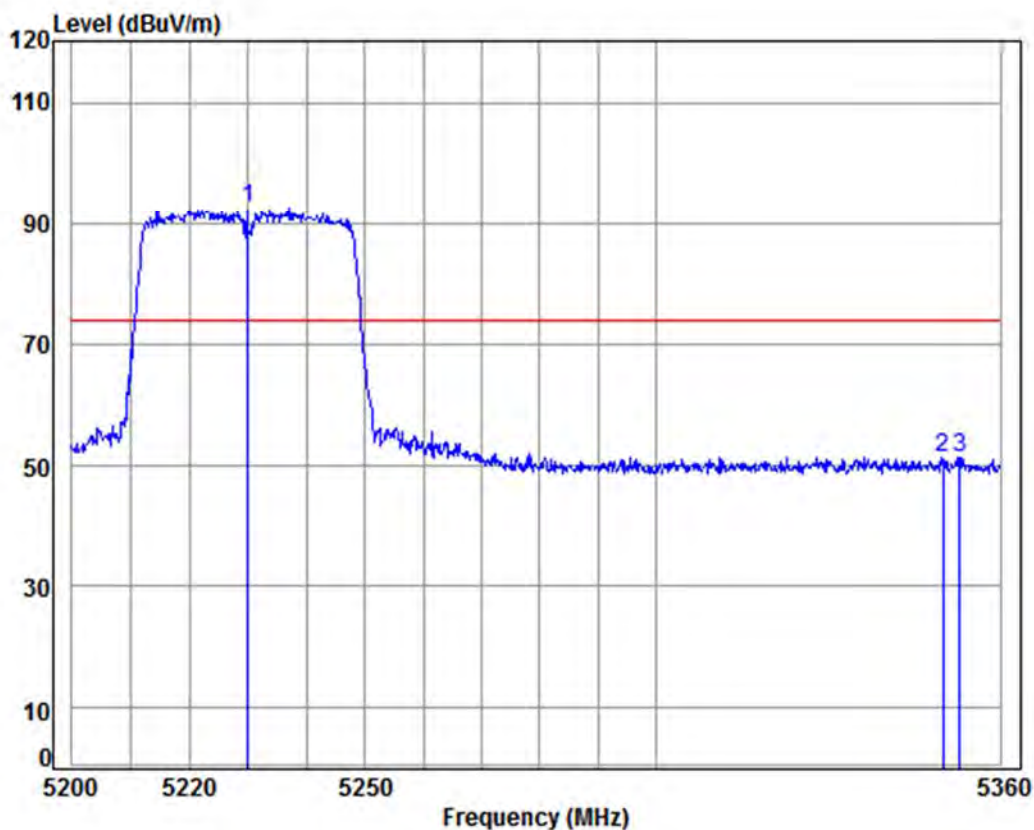

Condition: 3m VERTICAL
Job No : 09260RG
Mode : 5230 Band edge
: 5G WiFi 11AC40
: 12

		Cable	Ant	Preamp	Read	Limit	Over	
	Freq	Loss	Factor	Factor	Level	Level	Line	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1	pp 5230.000	8.45	34.45	37.45	87.01	92.46	74.00	18.46 Peak
2	5350.000	8.63	34.43	37.52	45.63	51.17	74.00	-22.83 Peak
3	5353.020	8.63	34.43	37.52	45.94	51.48	74.00	-22.52 Peak




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM170800926003

Page: 342 of 411

Test mode:	802.11n(HT40)	Frequency(MHz):	5230	Average	Vertical
------------	---------------	-----------------	------	---------	----------

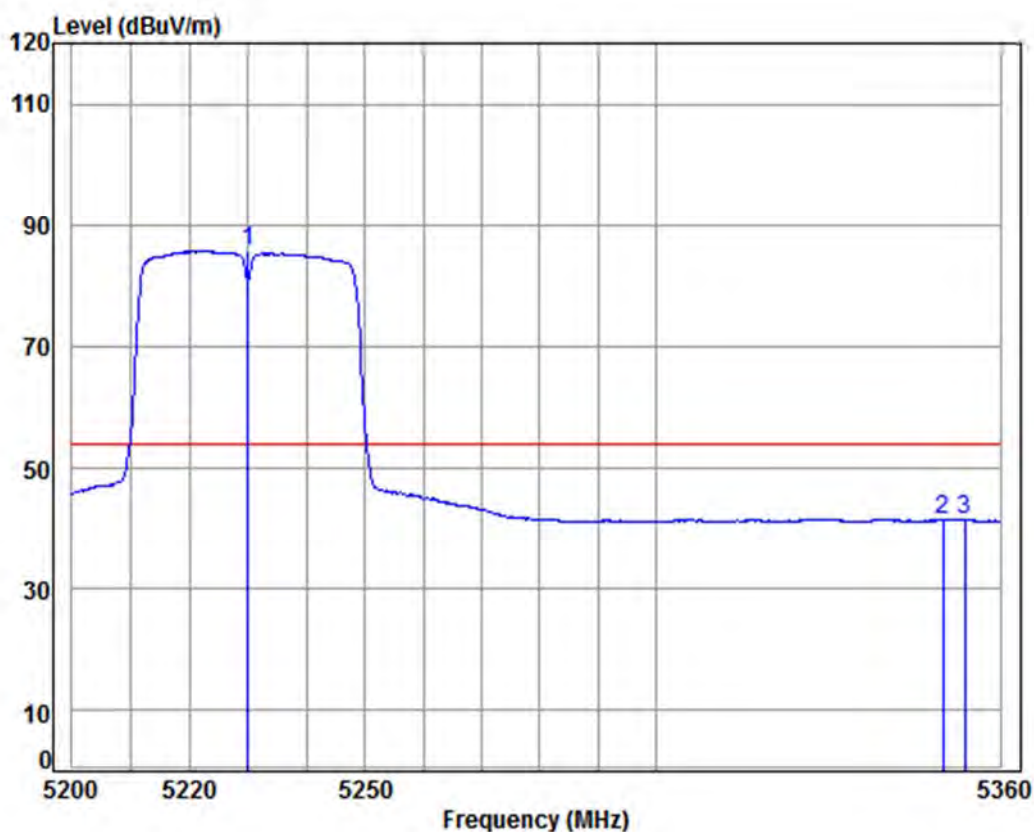

Condition: 3m VERTICAL

Job No : 09260RG

Mode : 5230 Band edge

: 5G WiFi 11AC40

: 12

		Cable	Ant	Preamp	Read	Limit	Over	
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1	pp 5230.000	8.45	34.45	37.45	80.19	85.64	54.00	31.64 Average
2	5350.000	8.63	34.43	37.52	36.07	41.61	54.00	-12.39 Average
3	5353.831	8.64	34.43	37.53	36.03	41.57	54.00	-12.43 Average




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM170800926003

Page: 343 of 411

Test mode:	802.11n(HT40)	Frequency(MHz):	5230	Peak	Horizontal
------------	---------------	-----------------	------	------	------------

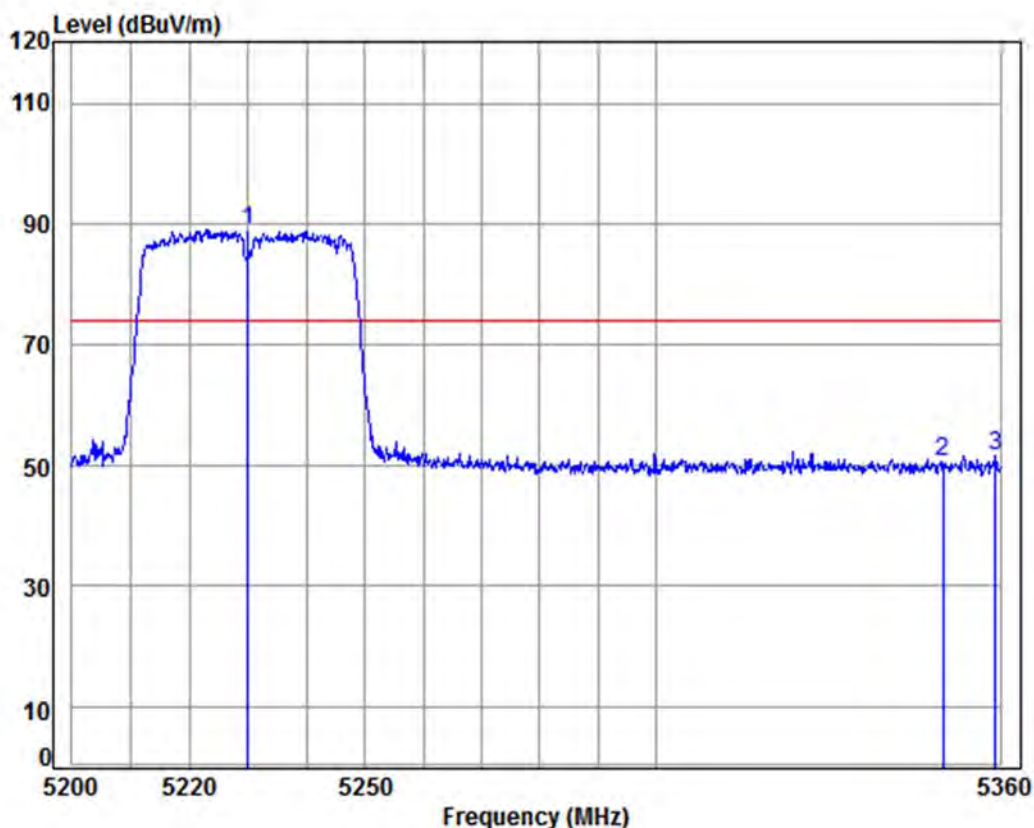

Condition: 3m HORIZONTAL
Job No : 09260RG
Mode : 5230 Band edge
: 5G WiFi 11AC40
: 12

		Cable	Ant	Preamp	Read		Limit	Over	
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1 pp	5230.000	8.45	34.45	37.45	83.43	88.88	74.00	14.88	peak
2	5350.000	8.63	34.43	37.52	45.05	50.59	74.00	-23.41	peak
3	5359.188	8.64	34.43	37.53	46.20	51.74	74.00	-22.26	peak




SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch

Report No.: SZEM170800926003

Page: 344 of 411

Test mode:	802.11n(HT40)	Frequency(MHz):	5230	Average	Horizontal
------------	---------------	-----------------	------	---------	------------

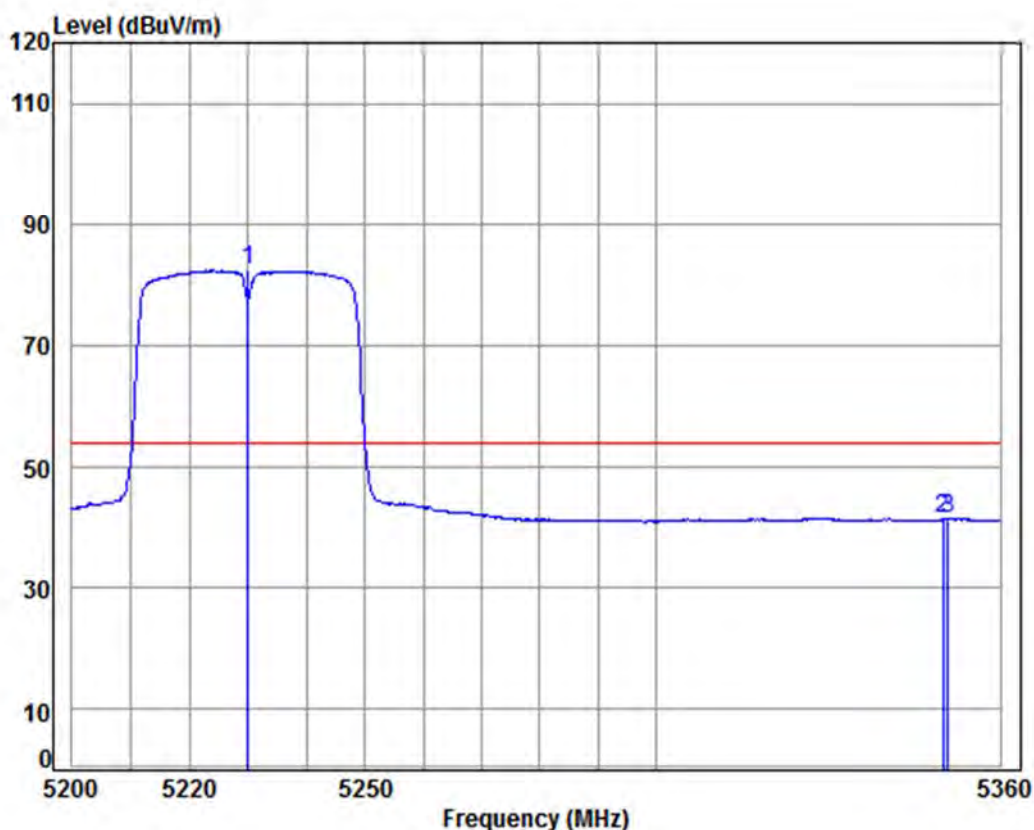

Condition: 3m HORIZONTAL
Job No : 09260RG
Mode : 5230 Band edge
: 5G WiFi 11AC40
: 12

		Cable	Ant	Preamp	Read	Limit	Over	
Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1 pp 5230.000	8.45	34.45	37.45	76.85	82.30	54.00	28.30	Average
2 5350.000	8.63	34.43	37.52	35.90	41.44	54.00	-12.56	Average
3 5350.911	8.63	34.43	37.52	35.97	41.51	54.00	-12.49	Average




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM170800926003

Page: 345 of 411

Test mode:	802.11n(HT40)	Frequency(MHz):	5270	Peak	Vertical
------------	---------------	-----------------	------	------	----------

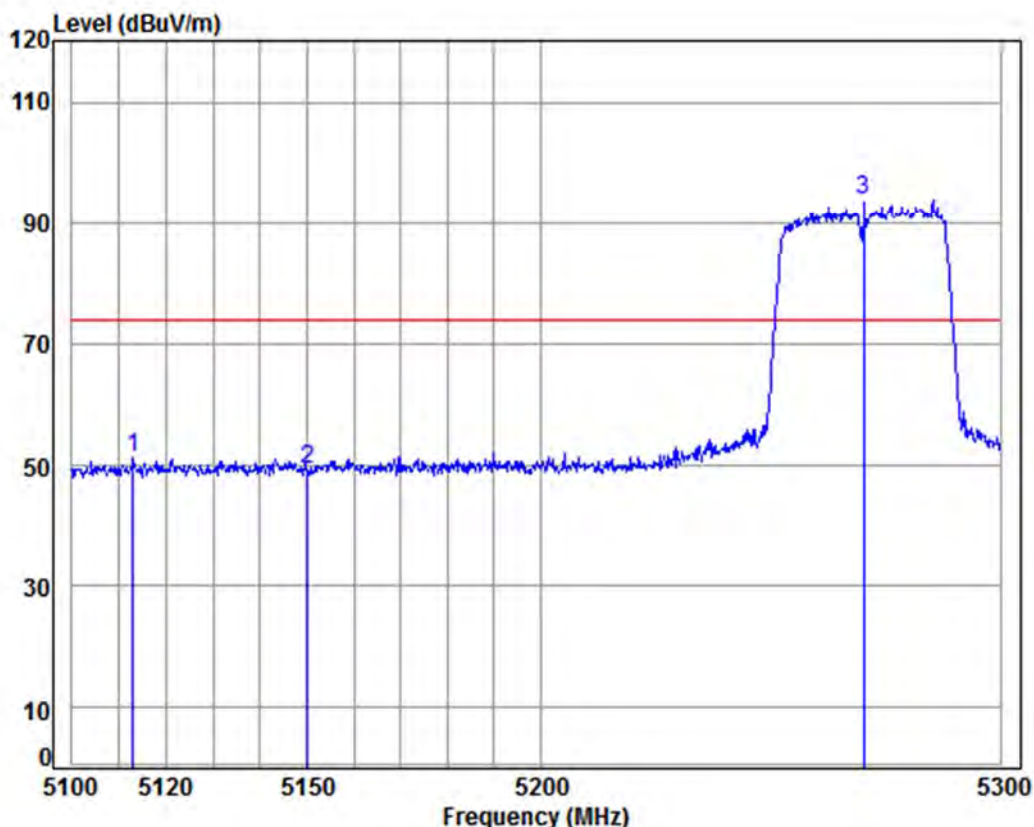

Condition: 3m VERTICAL
Job No : 09260RG
Mode : 5270 Band edge
: 5G WiFi 11AC40
: 12

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit	Over	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	5112.964	8.27	34.48	37.37	45.94	51.32	74.00	-22.68	Peak
2	5150.000	8.33	34.47	37.40	43.95	49.35	74.00	-24.65	Peak
3 pp	5270.000	8.51	34.44	37.47	88.25	93.73	74.00	19.73	Peak




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM170800926003

Page: 346 of 411

Test mode:	802.11n(HT40)	Frequency(MHz):	5270	Average	Vertical
------------	---------------	-----------------	------	---------	----------

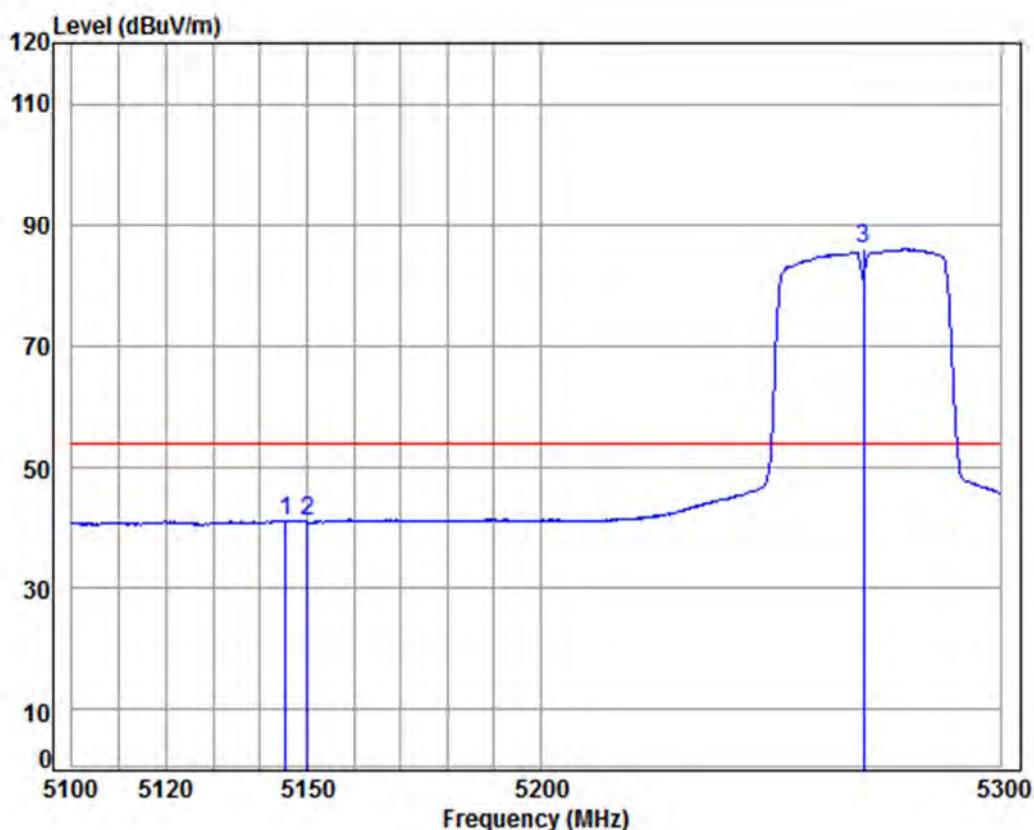

Condition: 3m VERTICAL
Job No : 09260RG
Mode : 5270 Band edge
: 5G WiFi 11AC40
: 12

		Cable	Ant	Preamp	Read	Limit	Over	
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1	5145.321	8.32	34.47	37.39	35.86	41.26	54.00	-12.74 Average
2	5150.000	8.33	34.47	37.40	35.65	41.05	54.00	-12.95 Average
3 pp	5270.000	8.51	34.44	37.47	80.52	86.00	54.00	32.00 Average




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM170800926003

Page: 347 of 411

Test mode:	802.11n(HT40)	Frequency(MHz):	5270	Peak	Horizontal
------------	---------------	-----------------	------	------	------------

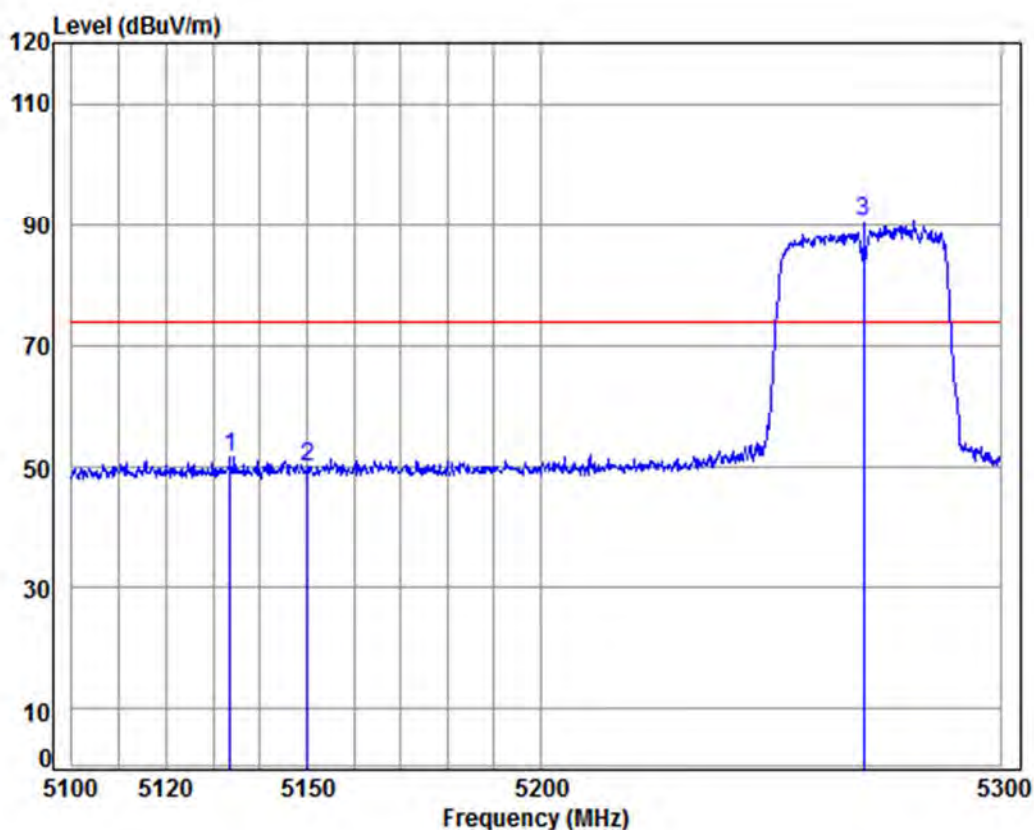

Condition: 3m HORIZONTAL
Job No : 09260RG
Mode : 5270 Band edge
: 5G WiFi 11AC40
: 12

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	5133.657	8.30	34.47	37.39	46.41	51.79	74.00	-22.21	peak
2	5150.000	8.33	34.47	37.40	44.64	50.04	74.00	-23.96	peak
3 pp	5270.000	8.51	34.44	37.47	85.00	90.48	74.00	16.48	peak




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM170800926003

Page: 348 of 411

Test mode:	802.11n(HT40)	Frequency(MHz):	5270	Average	Horizontal
------------	---------------	-----------------	------	---------	------------

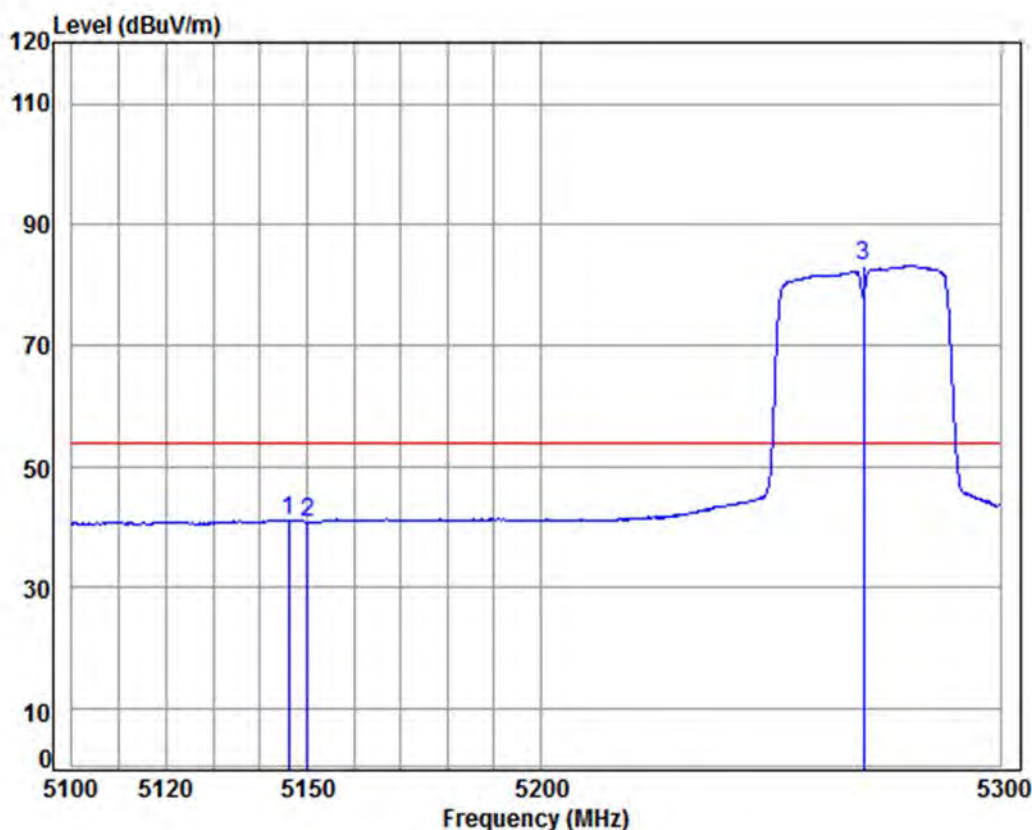

Condition: 3m HORIZONTAL
Job No : 09260RG
Mode : 5270 Band edge
: 5G WiFi 11AC40
: 12

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit	Over	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	5146.113	8.32	34.47	37.39	35.80	41.20	54.00	-12.80	Average
2	5150.000	8.33	34.47	37.40	35.56	40.96	54.00	-13.04	Average
3 pp	5270.000	8.51	34.44	37.47	77.60	83.08	54.00	29.08	Average




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM170800926003

Page: 349 of 411

Test mode:	802.11n(HT40)	Frequency(MHz):	5310	Peak	Vertical
------------	---------------	-----------------	------	------	----------

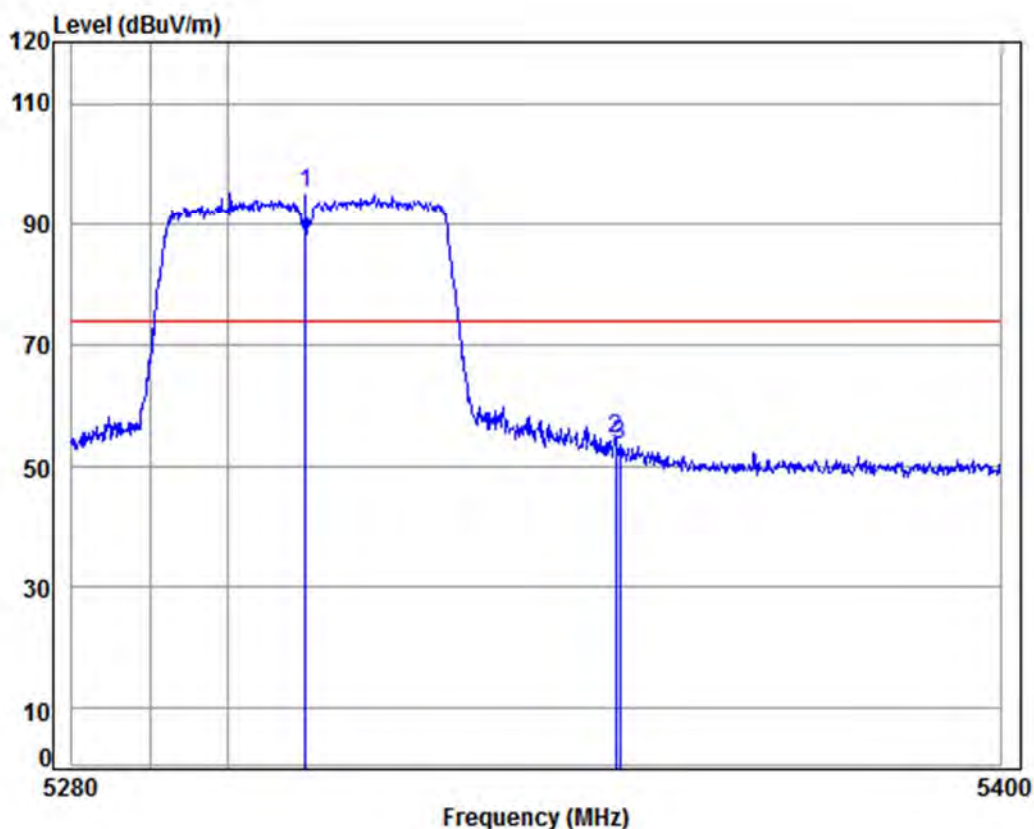

Condition: 3m VERTICAL

Job No : 09260RG

Mode : 5310 Band edge

: 5G WiFi 11AC40

: 12

		Cable	Ant	Preamp	Read	Limit	Over	
	Freq	Loss	Factor	Factor	Level	Line	Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1	pp 5310.000	8.57	34.44	37.50	89.70	95.21	74.00	21.21 Peak
2	5350.000	8.63	34.43	37.52	49.09	54.63	74.00	-19.37 Peak
3	5350.474	8.63	34.43	37.52	48.01	53.55	74.00	-20.45 Peak




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM170800926003

Page: 350 of 411

Test mode:	802.11n(HT40)	Frequency(MHz):	5310	Average	Vertical
------------	---------------	-----------------	------	---------	----------

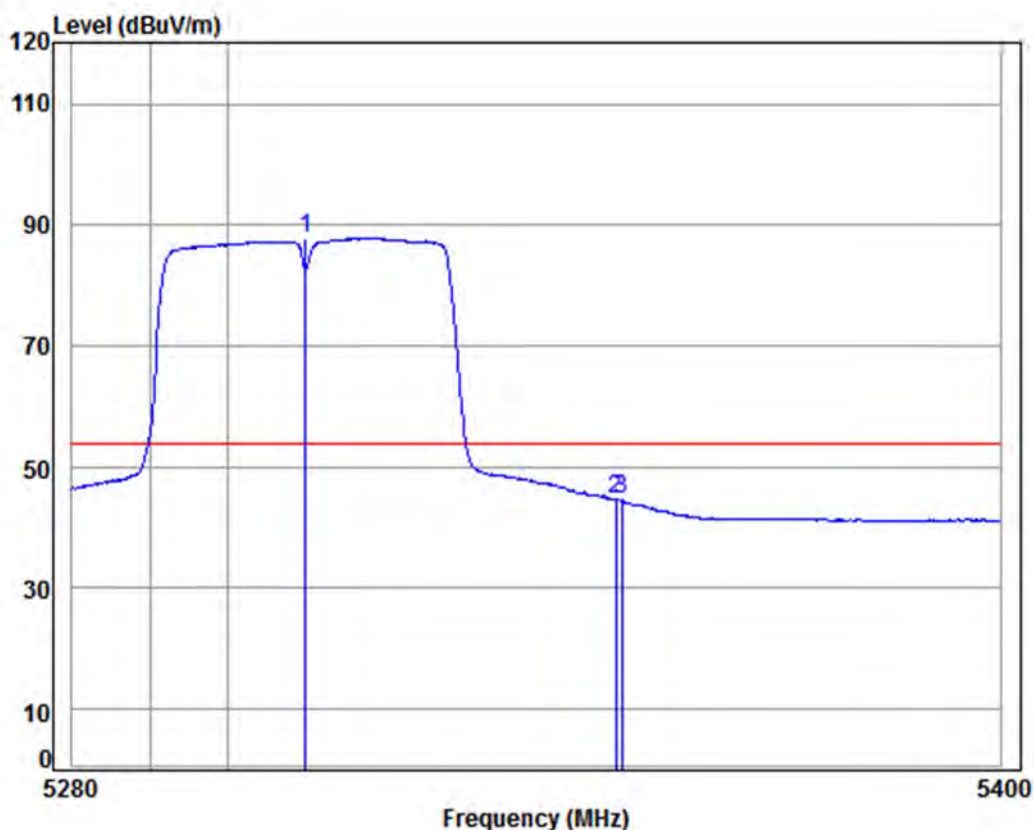

Condition: 3m VERTICAL

Job No : 09260RG

Mode : 5310 Band edge

: 5G WiFi 11AC40

: 12

		Cable	Ant	Preamp	Read	Limit	Over	
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1	pp 5310.000	8.57	34.44	37.50	82.18	87.69	54.00	33.69 Average
2	5350.000	8.63	34.43	37.52	39.28	44.82	54.00	-9.18 Average
3	5350.714	8.63	34.43	37.52	39.11	44.65	54.00	-9.35 Average




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM170800926003

Page: 351 of 411

Test mode:	802.11n(HT40)	Frequency(MHz):	5310	Peak	Horizontal
------------	---------------	-----------------	------	------	------------

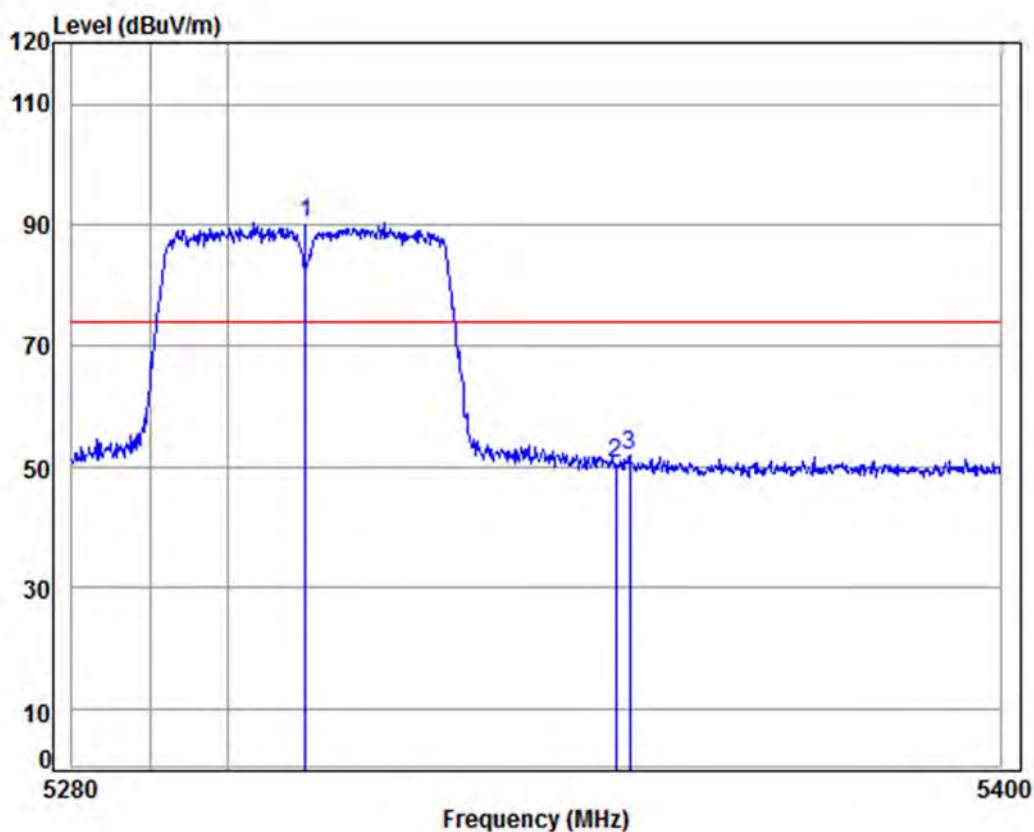

Condition: 3m HORIZONTAL
Job No : 09260RG
Mode : 5310 Band edge
: 5G WiFi 11AC40
: 12

		Cable	Ant	Preamp	Read	Limit	Over	
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1	pp 5310.000	8.57	34.44	37.50	84.76	90.27	74.00	16.27 peak
2	5350.000	8.63	34.43	37.52	44.98	50.52	74.00	-23.48 peak
3	5351.796	8.63	34.43	37.52	46.37	51.91	74.00	-22.09 peak




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM170800926003

Page: 352 of 411

Test mode:	802.11n(HT40)	Frequency(MHz):	5310	Average	Horizontal
------------	---------------	-----------------	------	---------	------------

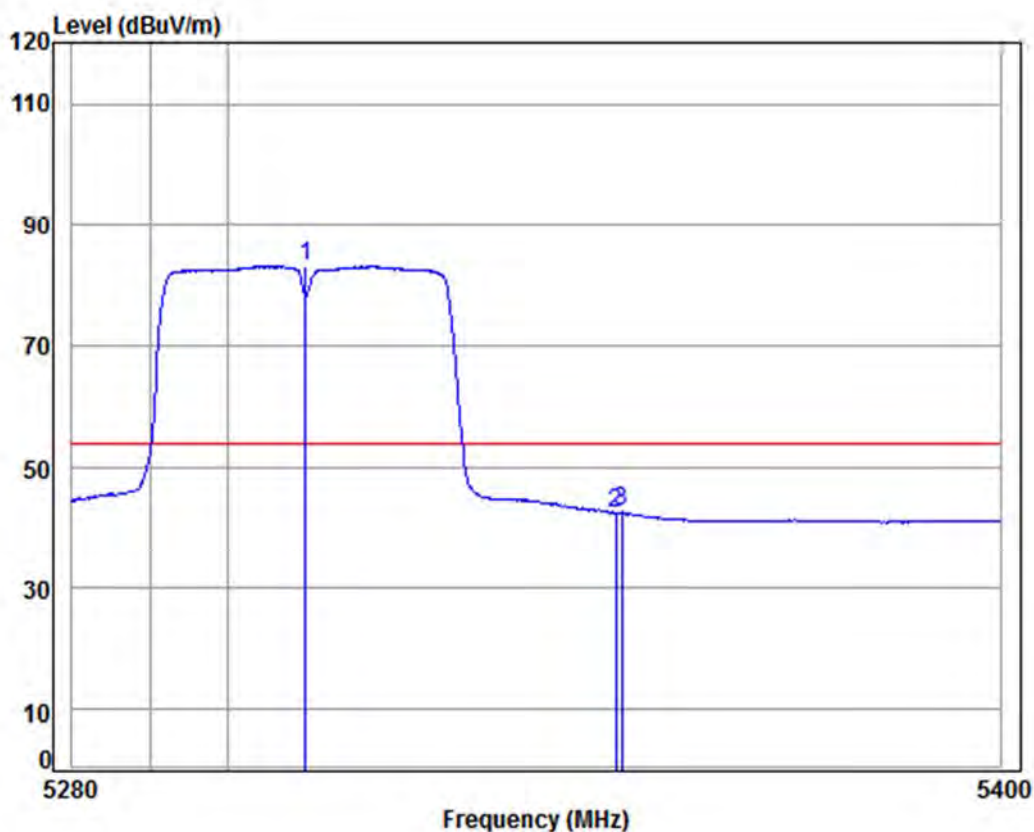

Condition: 3m HORIZONTAL
Job No : 09260RG
Mode : 5310 Band edge
: 5G WiFi 11AC40
: 12

		Cable	Ant	Preamp	Read	Limit	Over	
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1	pp 5310.000	8.57	34.44	37.50	77.50	83.01	54.00	29.01 Average
2	5350.000	8.63	34.43	37.52	37.06	42.60	54.00	-11.40 Average
3	5350.714	8.63	34.43	37.52	37.23	42.77	54.00	-11.23 Average




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM170800926003

Page: 353 of 411

Test mode:	802.11n(HT40)	Frequency(MHz):	5510	Peak	Vertical
------------	---------------	-----------------	------	------	----------

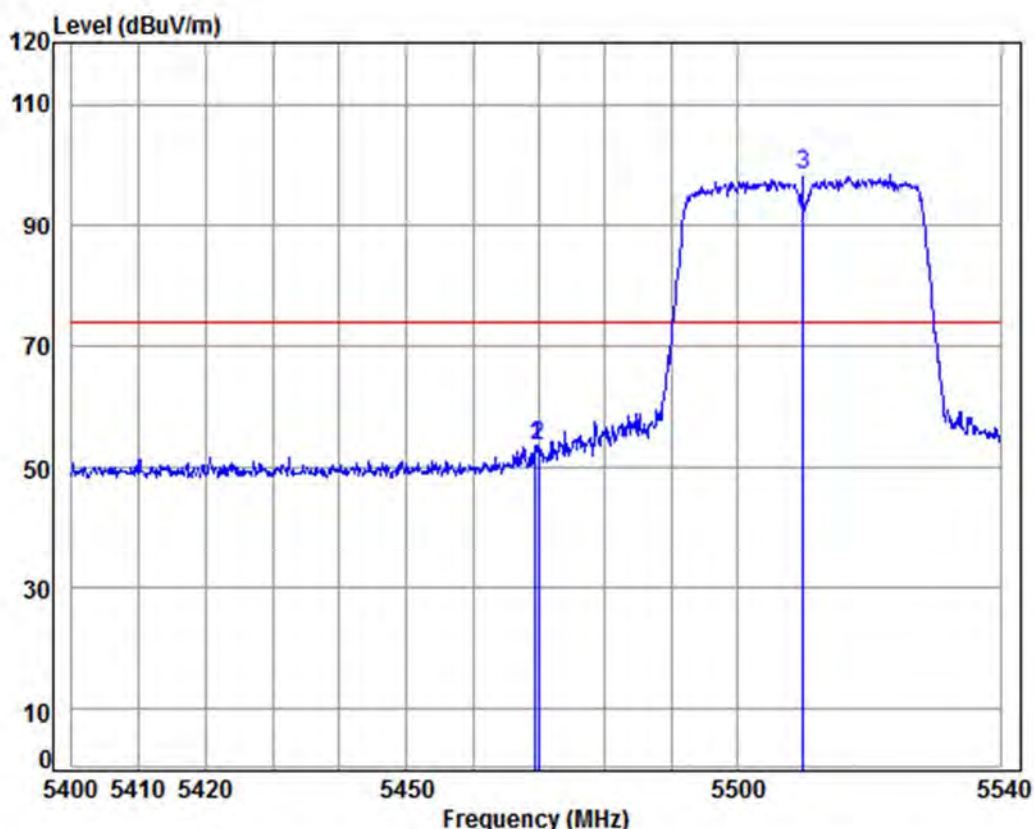

Condition: 3m VERTICAL
Job No : 09260RG
Mode : 5510 Band edge
: 5G WiFi 11AC40
: 12

		Cable	Ant	Preamp	Read	Limit	Over	
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1	5469.552	8.81	34.41	37.60	48.01	53.63	74.00	-20.37 Peak
2	5470.000	8.81	34.41	37.60	48.10	53.72	74.00	-20.28 Peak
3 pp	5510.000	8.89	34.41	37.62	92.75	98.43	74.00	24.43 Peak




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM170800926003

Page: 354 of 411

Test mode:	802.11n(HT40)	Frequency(MHz):	5510	Average	Vertical
------------	---------------	-----------------	------	---------	----------

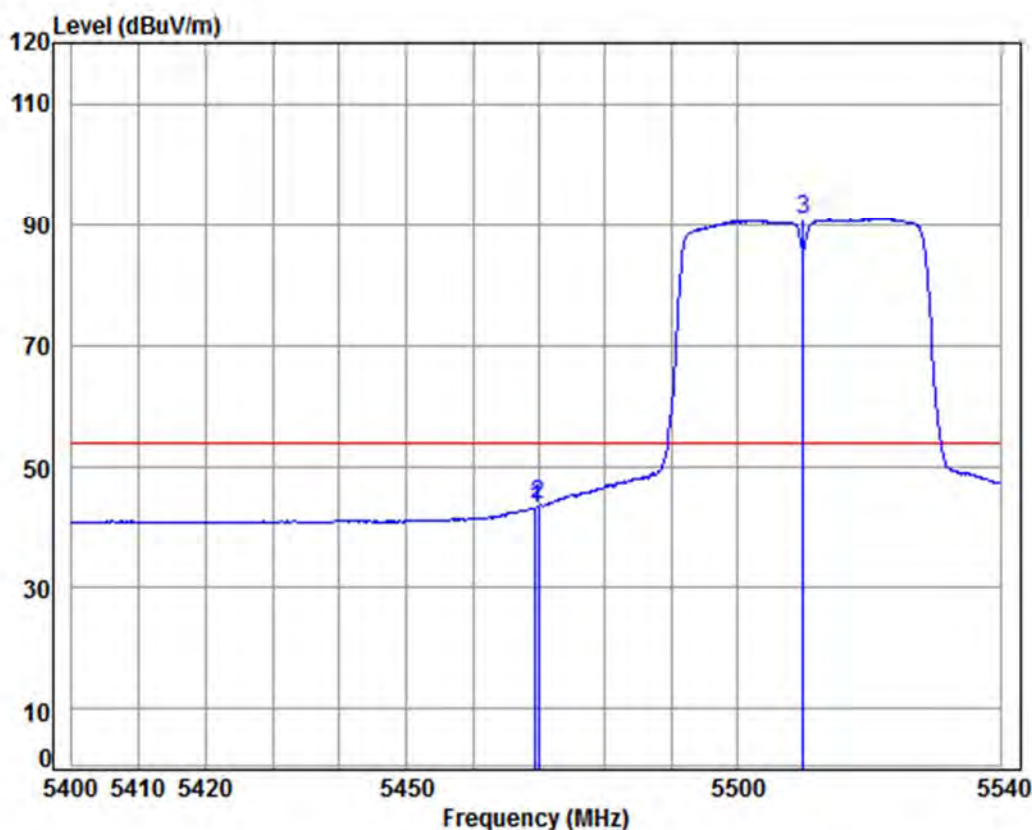

Condition: 3m VERTICAL
Job No : 09260RG
Mode : 5510 Band edge
: 5G WiFi 11AC40
: 12

		Cable	Ant	Preamp	Read	Limit	Over	
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1	5469.552	8.81	34.41	37.60	37.66	43.28	54.00	-10.72 Average
2	5470.000	8.81	34.41	37.60	38.07	43.69	54.00	-10.31 Average
3 pp	5510.000	8.89	34.41	37.62	85.28	90.96	54.00	36.96 Average




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM170800926003

Page: 355 of 411

Test mode:	802.11n(HT40)	Frequency(MHz):	5510	Peak	Horizontal
------------	---------------	-----------------	------	------	------------

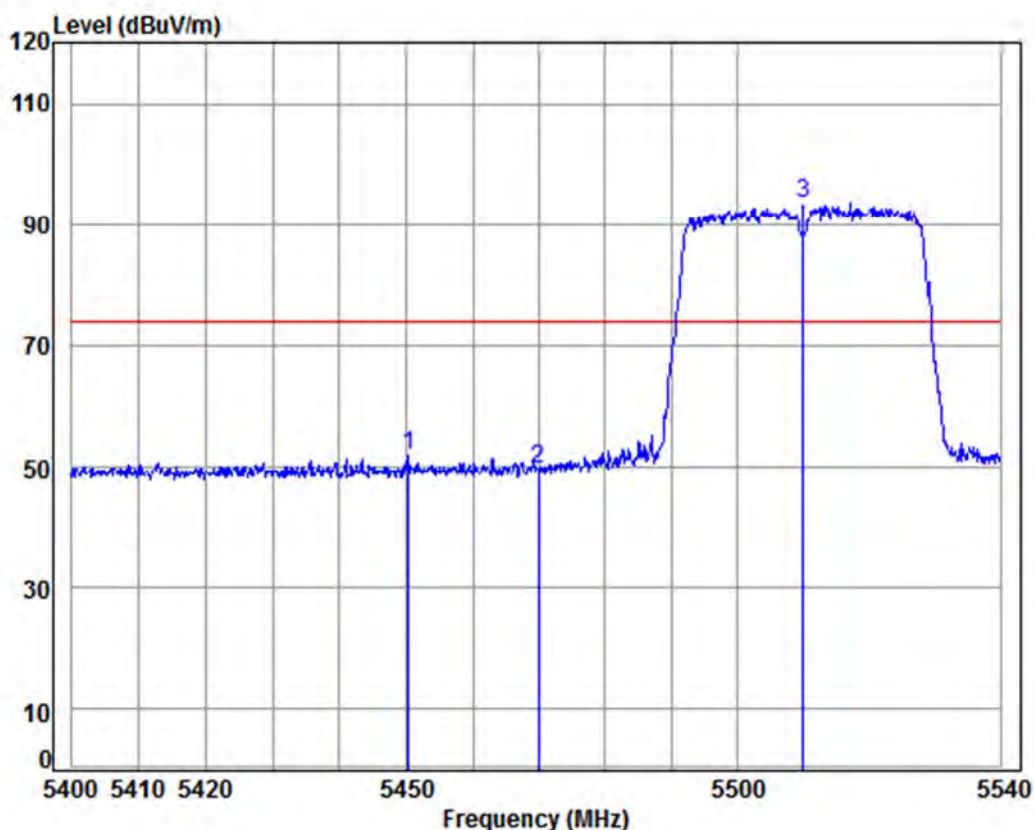

Condition: 3m HORIZONTAL
Job No : 09260RG
Mode : 5510 Band edge
: 5G WiFi 11AC40
: 12

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit	Over	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	5450.406	8.78	34.41	37.58	46.26	51.87	74.00	-22.13	peak
2	5470.000	8.81	34.41	37.60	44.06	49.68	74.00	-24.32	peak
3 pp	5510.000	8.89	34.41	37.62	87.77	93.45	74.00	19.45	peak




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM170800926003

Page: 356 of 411

Test mode:	802.11n(HT40)	Frequency(MHz):	5510	Average	Horizontal
------------	---------------	-----------------	------	---------	------------

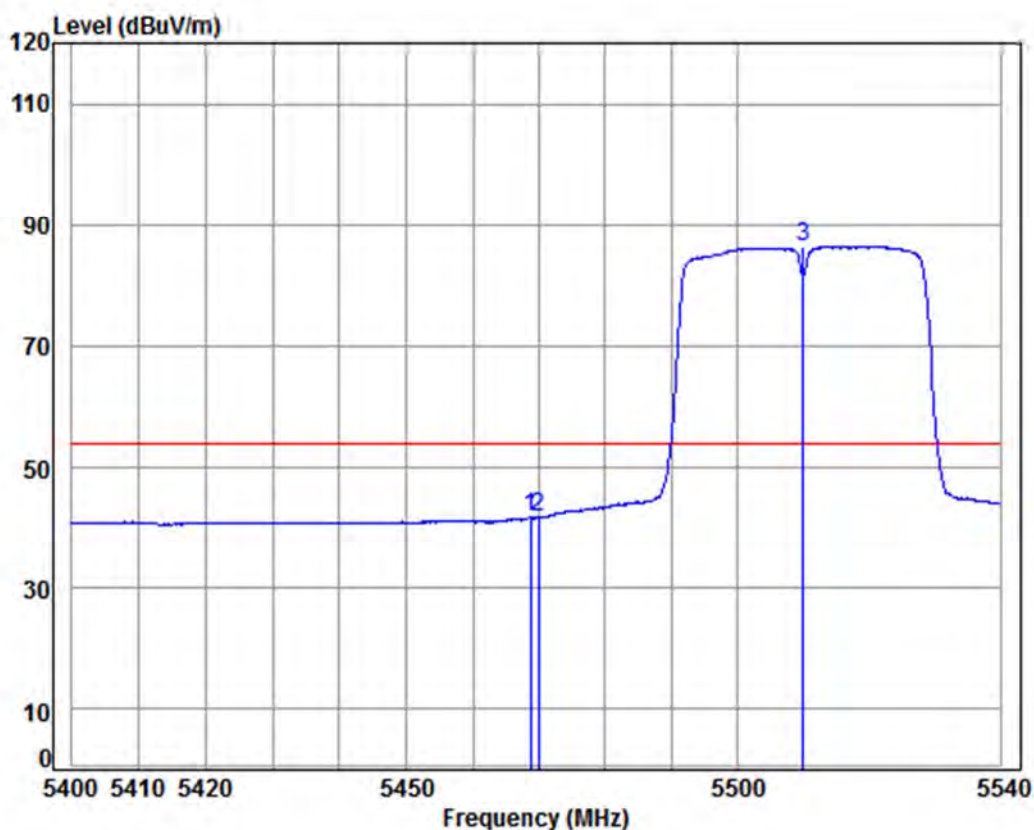

Condition: 3m HORIZONTAL
Job No : 09260RG
Mode : 5510 Band edge
: 5G WiFi 11AC40
: 12

	Freq	Cable	Ant	Preamp	Read	Limit	Over	
	MHz	Loss	Factor	Factor	Level	Level	Line	Limit Remark
		dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1	5468.712	8.80	34.41	37.59	36.16	41.78	54.00	-12.22 Average
2	5470.000	8.81	34.41	37.60	36.20	41.82	54.00	-12.18 Average
3 pp	5510.000	8.89	34.41	37.62	80.67	86.35	54.00	32.35 Average




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM170800926003

Page: 357 of 411

Test mode:	802.11n(HT40)	Frequency(MHz):	5670	Peak	Vertical
------------	---------------	-----------------	------	------	----------

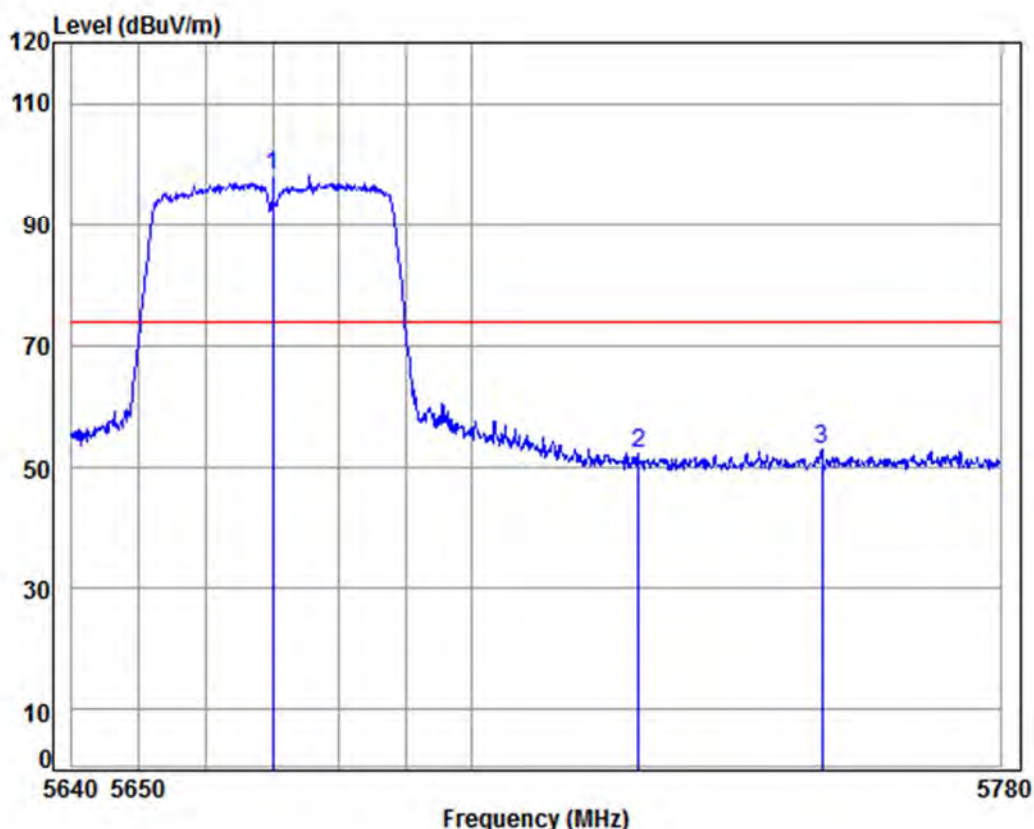

Condition: 3m VERTICAL
Job No : 09260RG
Mode : 5670 Band edge
: 5G WiFi 11AC40
: 12

		Cable	Ant	Preamp	Read	Limit	Over	
	Freq	Loss	Factor	Factor	Level	Level	Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1	pp 5670.000	9.45	34.50	37.71	91.89	98.13	74.00	24.13 Peak
2	5725.000	9.64	34.54	37.75	45.84	52.27	74.00	-21.73 Peak
3	5752.853	9.74	34.55	37.76	46.56	53.09	74.00	-20.91 Peak




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM170800926003

Page: 358 of 411

Test mode:	802.11n(HT40)	Frequency(MHz):	5670	Average	Vertical
------------	---------------	-----------------	------	---------	----------

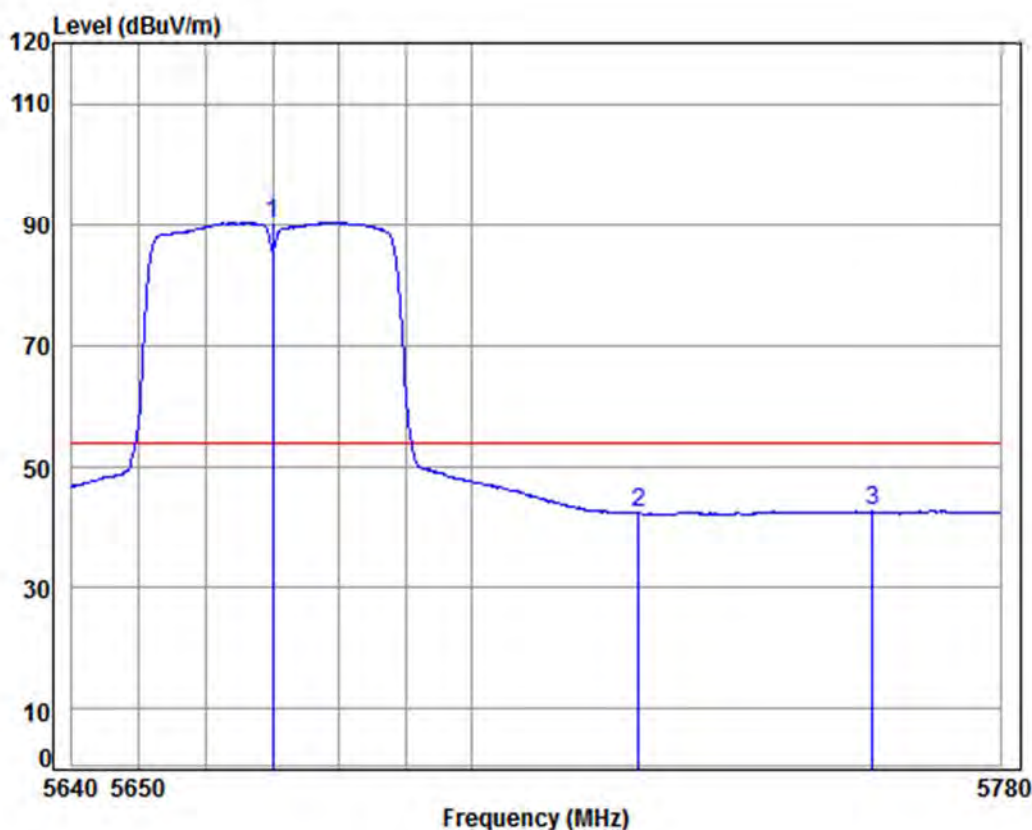

Condition: 3m VERTICAL

Job No : 09260RG

Mode : 5670 Band edge

: 5G WiFi 11AC40

: 12

		Cable	Ant	Preamp	Read	Limit	Over	
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1	pp 5670.000	9.45	34.50	37.71	84.04	90.28	54.00	36.28 Average
2	5725.000	9.64	34.54	37.75	36.06	42.49	54.00	-11.51 Average
3	5760.475	9.76	34.56	37.77	36.20	42.75	54.00	-11.25 Average




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM170800926003

Page: 359 of 411

Test mode:	802.11n(HT40)	Frequency(MHz):	5670	Peak	Horizontal
------------	---------------	-----------------	------	------	------------

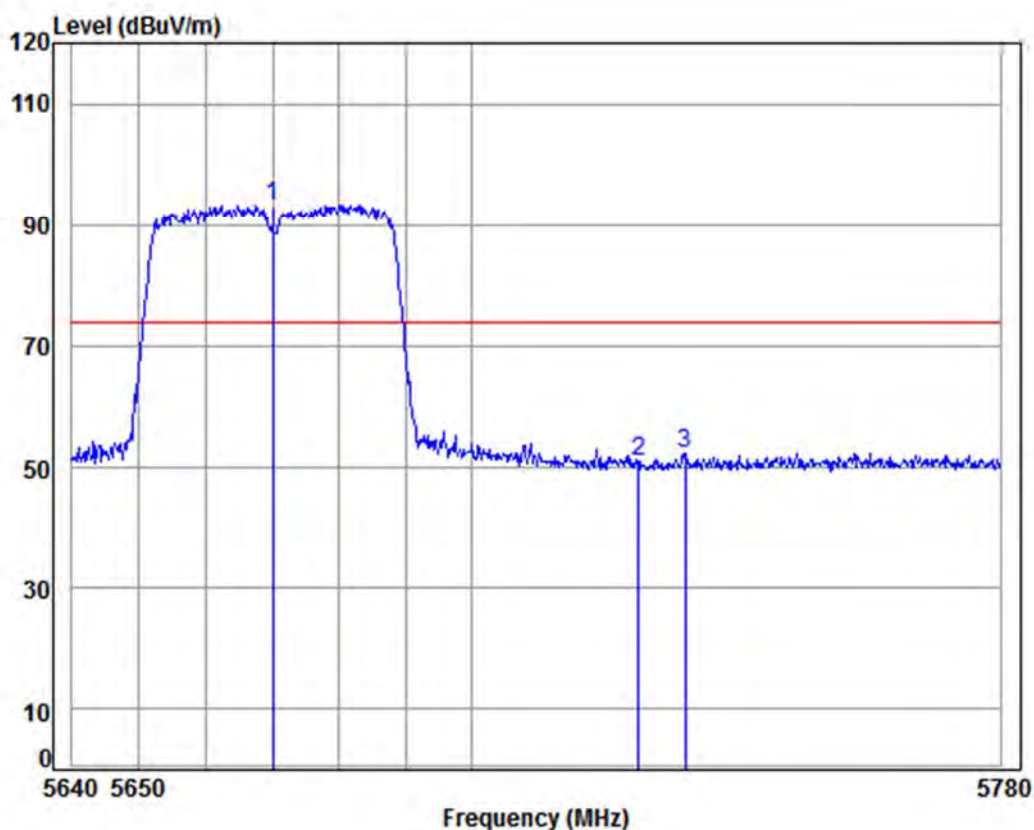

Condition: 3m HORIZONTAL
Job No : 09260RG
Mode : 5670 Band edge
: 5G WiFi 11AC40
: 12

		Cable	Ant	Preamp	Read	Limit	Over	
	Freq	Loss	Factor	Factor	Level	Level	Line	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1	pp 5670.000	9.45	34.50	37.71	87.11	93.35	74.00	19.35 peak
2	5725.000	9.64	34.54	37.75	44.65	51.08	74.00	-22.92 peak
3	5732.155	9.67	34.54	37.75	45.97	52.43	74.00	-21.57 peak




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM170800926003

Page: 360 of 411

Test mode:	802.11n(HT40)	Frequency(MHz):	5670	Average	Horizontal
------------	---------------	-----------------	------	---------	------------

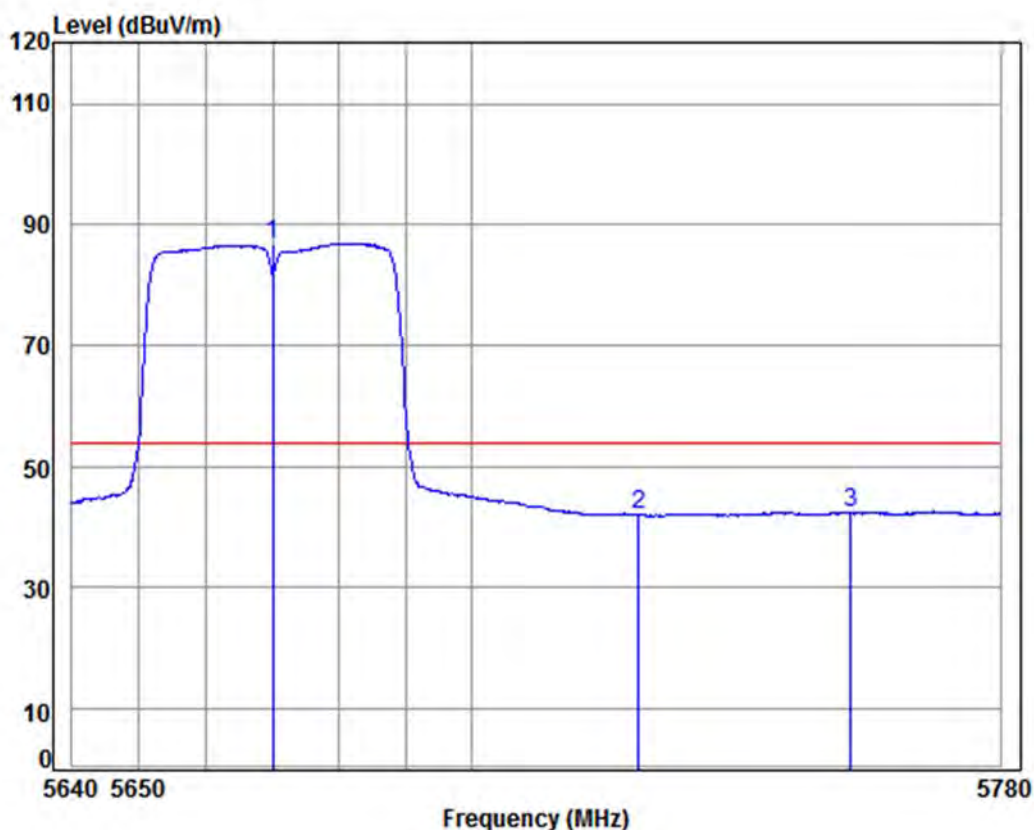

Condition: 3m HORIZONTAL

Job No : 09260RG

Mode : 5670 Band edge

: 5G WiFi 11AC40

: 12

		Cable	Ant	Preamp	Read	Limit	Over	
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1	pp 5670.000	9.45	34.50	37.71	80.52	86.76	54.00	32.76 Average
2	5725.000	9.64	34.54	37.75	35.70	42.13	54.00	-11.87 Average
3	5757.228	9.75	34.56	37.76	36.00	42.55	54.00	-11.45 Average




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM170800926003

Page: 361 of 411

Test mode:	802.11n(HT40)	Frequency(MHz):	5755	Peak	Vertical
------------	---------------	-----------------	------	------	----------

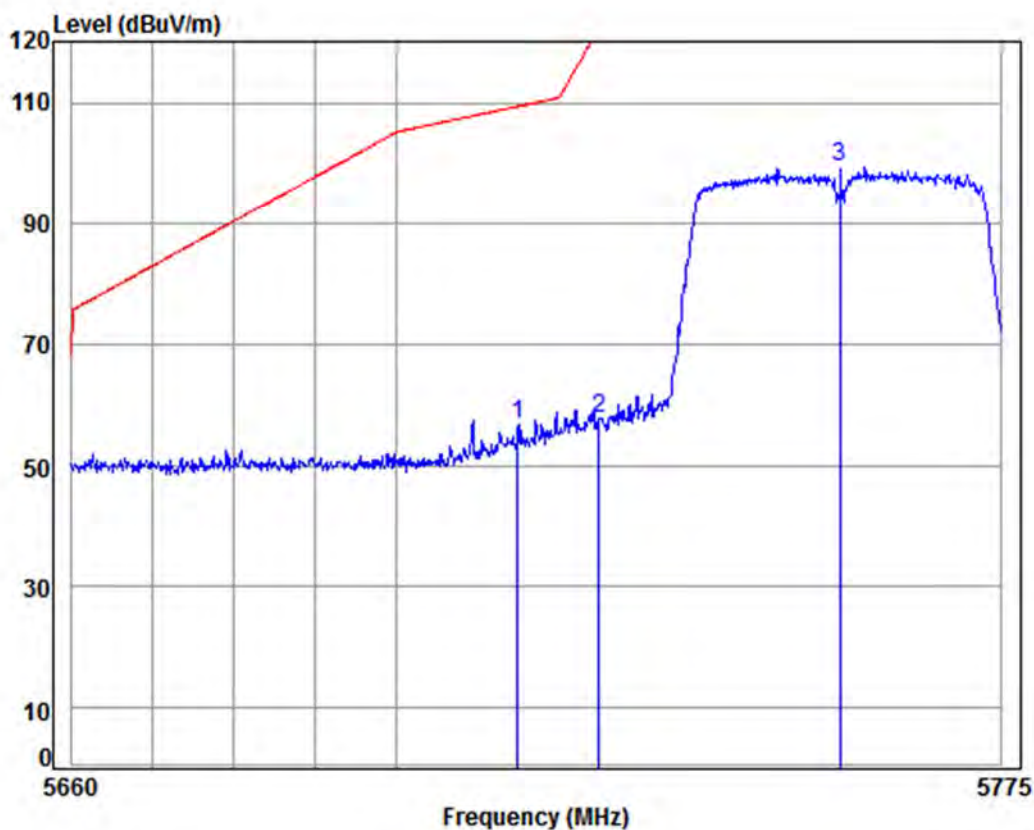

Condition: 3m VERTICAL

Job No : 09260RG

Mode : 5755 Band edge

: 5G WiFi 11AC40

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit	Over	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	5715.000	9.61	34.53	37.74	50.48	56.88	109.40	-52.52	peak
2	5725.000	9.64	34.54	37.75	51.60	58.03	122.20	-64.17	peak
3 pp	5755.000	9.75	34.56	37.76	92.71	99.26	125.20	-25.94	peak




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM170800926003

Page: 362 of 411

Test mode:	802.11n(HT40)	Frequency(MHz):	5755	Peak	Horizontal
------------	---------------	-----------------	------	------	------------

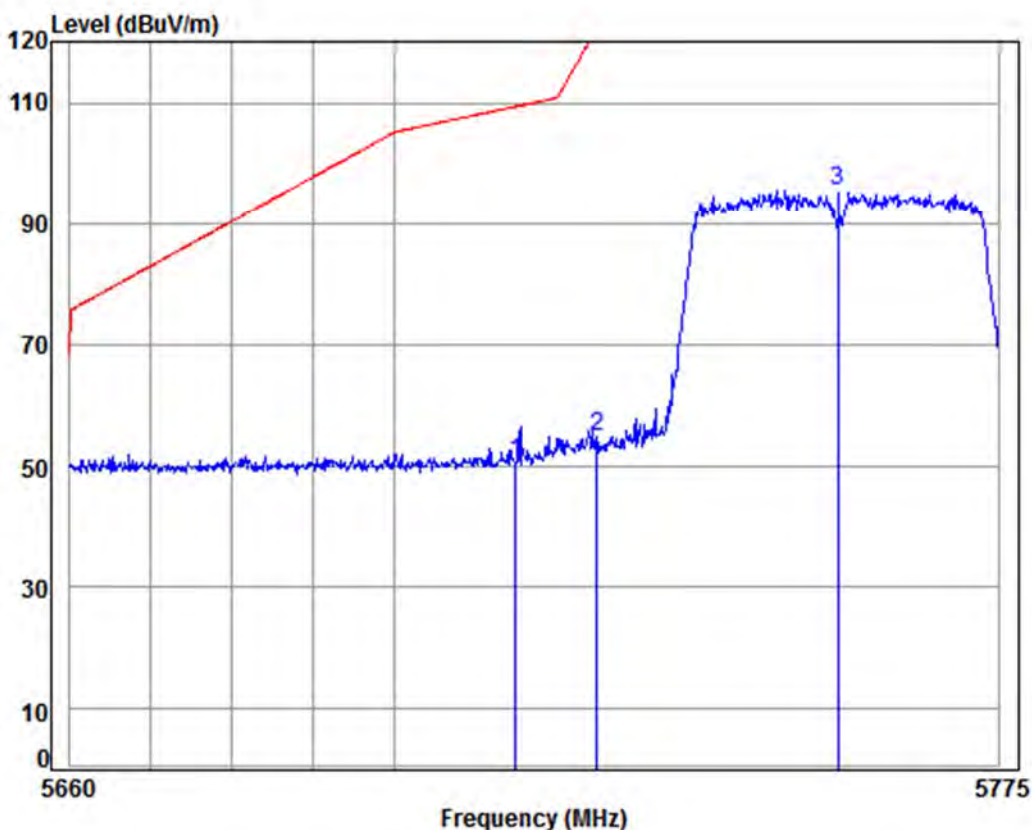

Condition: 3m HORIZONTAL

Job No : 09260RG

Mode : 5755 Band edge

: 5G WiFi 11AC40

		Cable	Ant	Preamp	Read	Limit	Over	
	Freq	Loss	Factor	Factor	Level	Level	Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1	5715.000	9.61	34.53	37.74	44.42	50.82	109.40	-58.58 peak
2	5725.000	9.64	34.54	37.75	48.44	54.87	122.20	-67.33 peak
3 pp	5755.000	9.75	34.56	37.76	89.07	95.62	125.20	-29.58 peak




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM170800926003

Page: 363 of 411

Test mode:	802.11n(HT40)	Frequency(MHz):	5795	Peak	Vertical
------------	---------------	-----------------	------	------	----------

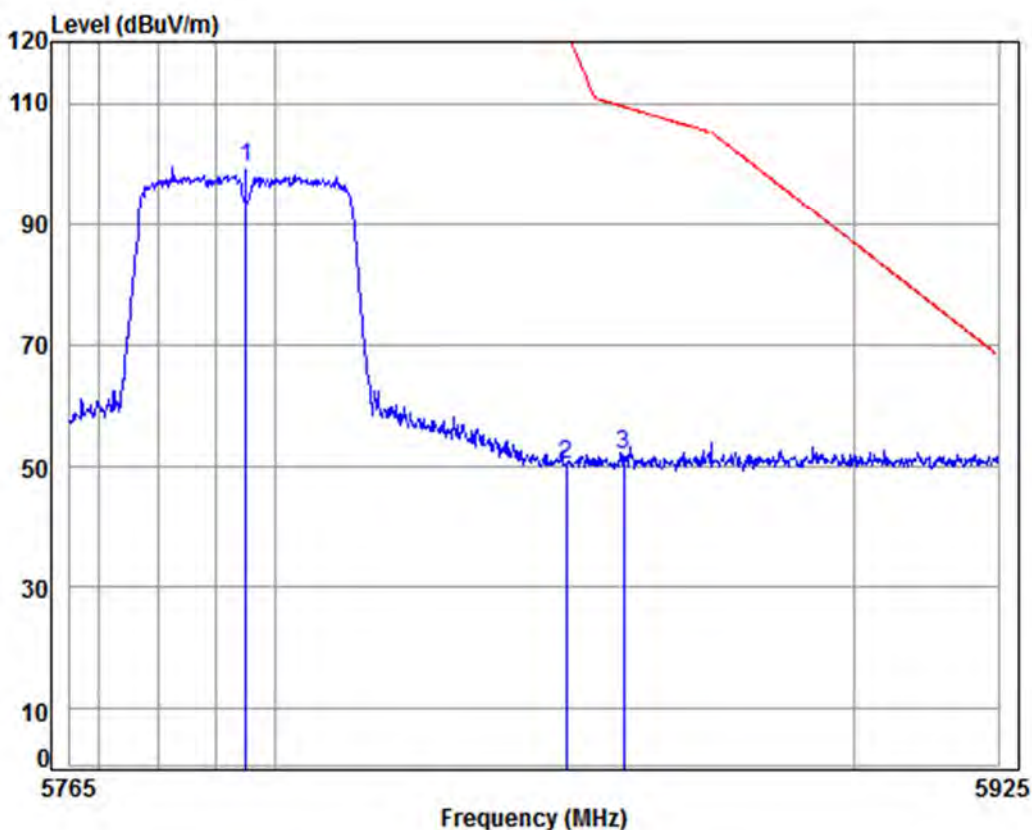

Condition: 3m VERTICAL

Job No : 09260RG

Mode : 5795 Band edge

: 5G WiFi 11AC40

		Cable	Ant	Preamp	Read	Limit	Over		
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1 pp	5795.000	9.88	34.58	37.79	92.69	99.36	125.20	-25.84	peak
2	5850.000	10.07	34.61	37.82	43.40	50.26	122.20	-71.94	peak
3	5860.000	10.10	34.62	37.82	45.17	52.07	109.40	-57.33	peak




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM170800926003

Page: 364 of 411

Test mode:	802.11n(HT40)	Frequency(MHz):	5795	Peak	Horizontal
------------	---------------	-----------------	------	------	------------

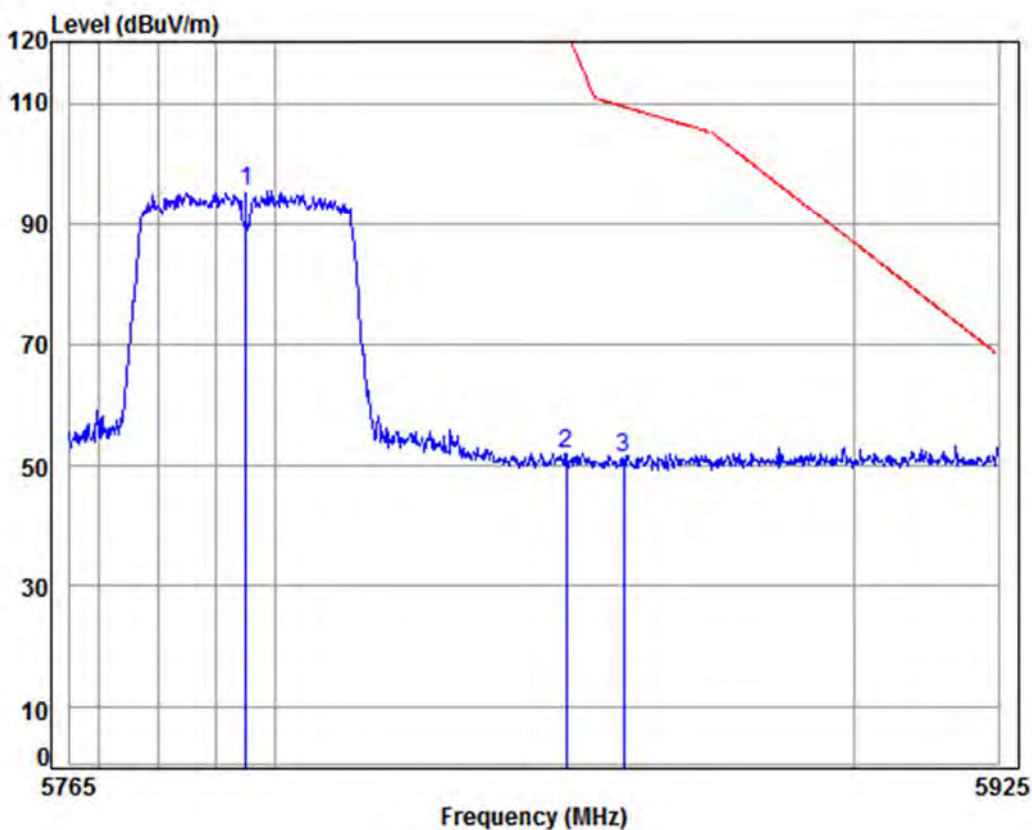

Condition: 3m HORIZONTAL

Job No : 09260RG

Mode : 5795 Band edge

: 5G WiFi 11AC40

		Cable	Ant	Preamp	Read	Limit	Over		
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1 pp	5795.000	9.88	34.58	37.79	88.68	95.35	125.20	-29.85	peak
2	5850.000	10.07	34.61	37.82	45.21	52.07	122.20	-70.13	peak
3	5860.000	10.10	34.62	37.82	44.31	51.21	109.40	-58.19	peak




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM170800926003

Page: 365 of 411

Test mode:	802.11ac(HT40)	Frequency(MHz):	5190	Peak	Vertical
------------	----------------	-----------------	------	------	----------

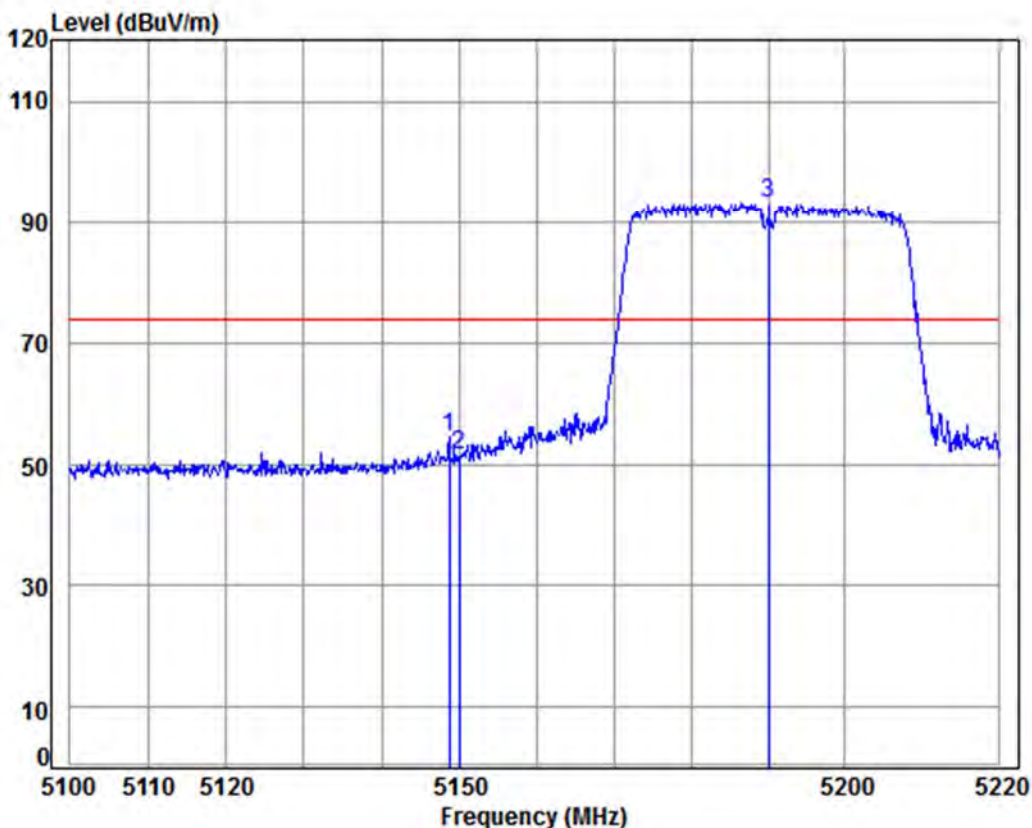

Condition: 3m VERTICAL
Job No : 09260RG
Mode : 5190 Band edge
: 5G WiFi 11AC40
: 12

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	5148.743	8.32	34.47	37.40	49.20	54.59	74.00	-19.41	Peak
2	5150.000	8.33	34.47	37.40	46.38	51.78	74.00	-22.22	Peak
3 pp	5190.000	8.39	34.46	37.42	87.72	93.15	74.00	19.15	Peak




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM170800926003

Page: 366 of 411

Test mode:	802.11ac(HT40)	Frequency(MHz):	5190	Average	Vertical
------------	----------------	-----------------	------	---------	----------

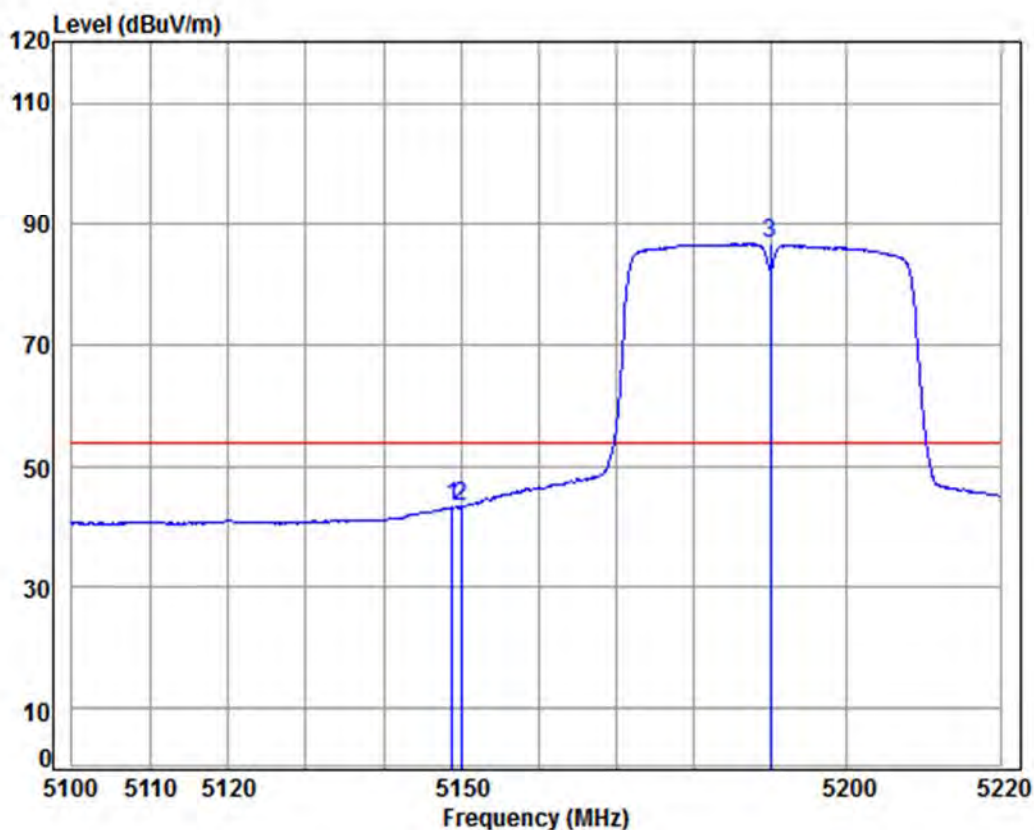

Condition: 3m VERTICAL
Job No : 09260RG
Mode : 5190 Band edge
: 5G WiFi 11AC40
: 12

	Freq	Cable Loss	Ant Factor	Preamplifier Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	5148.863	8.32	34.47	37.40	38.00	43.39	54.00	-10.61	Average
2	5150.000	8.33	34.47	37.40	38.12	43.52	54.00	-10.48	Average
3 pp	5190.000	8.39	34.46	37.42	81.11	86.54	54.00	32.54	Average




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM170800926003

Page: 367 of 411

Test mode:	802.11ac(HT40)	Frequency(MHz):	5190	Peak	Horizontal
------------	----------------	-----------------	------	------	------------

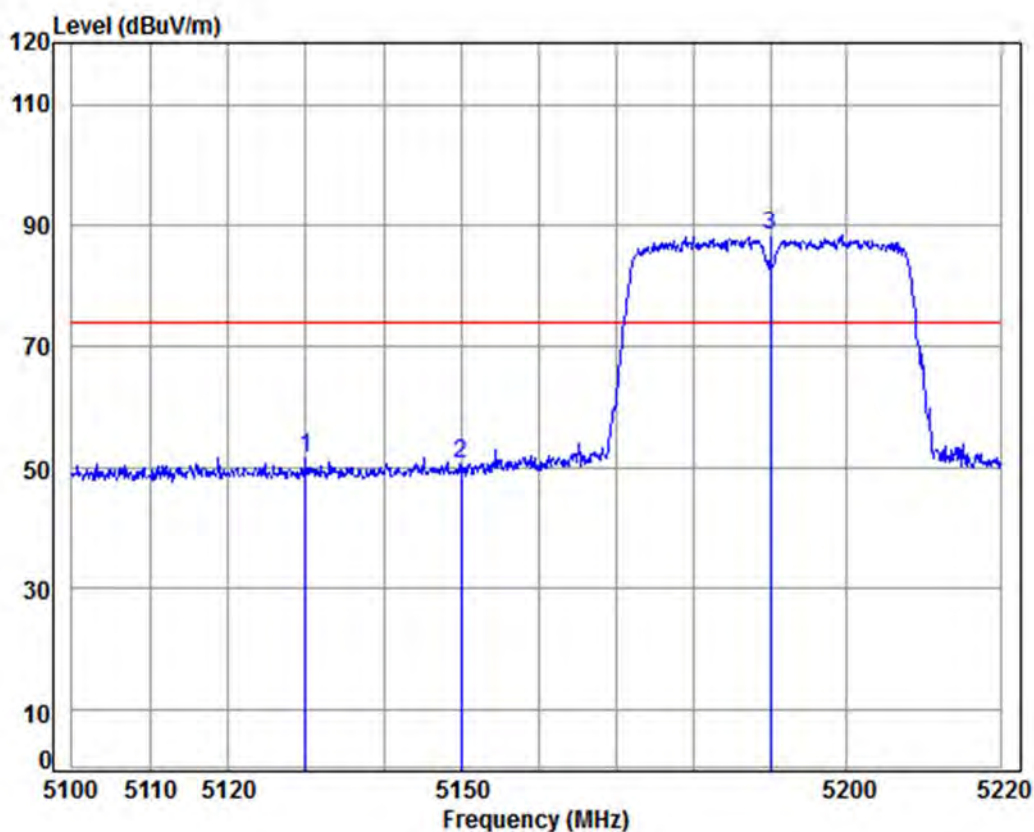

Condition: 3m HORIZONTAL
Job No : 09260RG
Mode : 5190 Band edge
: 5G WiFi 11AC40
: 12

	Freq	Cable	Ant	Preamp	Read	Limit	Over	
	MHz	Loss	Factor	Factor	Level	Line	Limit	Remark
		dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1	5129.978	8.29	34.47	37.38	46.35	51.73	74.00	-22.27 peak
2	5150.000	8.33	34.47	37.40	45.25	50.65	74.00	-23.35 peak
3 pp	5190.000	8.39	34.46	37.42	82.85	88.28	74.00	14.28 peak




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM170800926003

Page: 368 of 411

Test mode:	802.11ac(HT40)	Frequency(MHz):	5190	Average	Horizontal
------------	----------------	-----------------	------	---------	------------

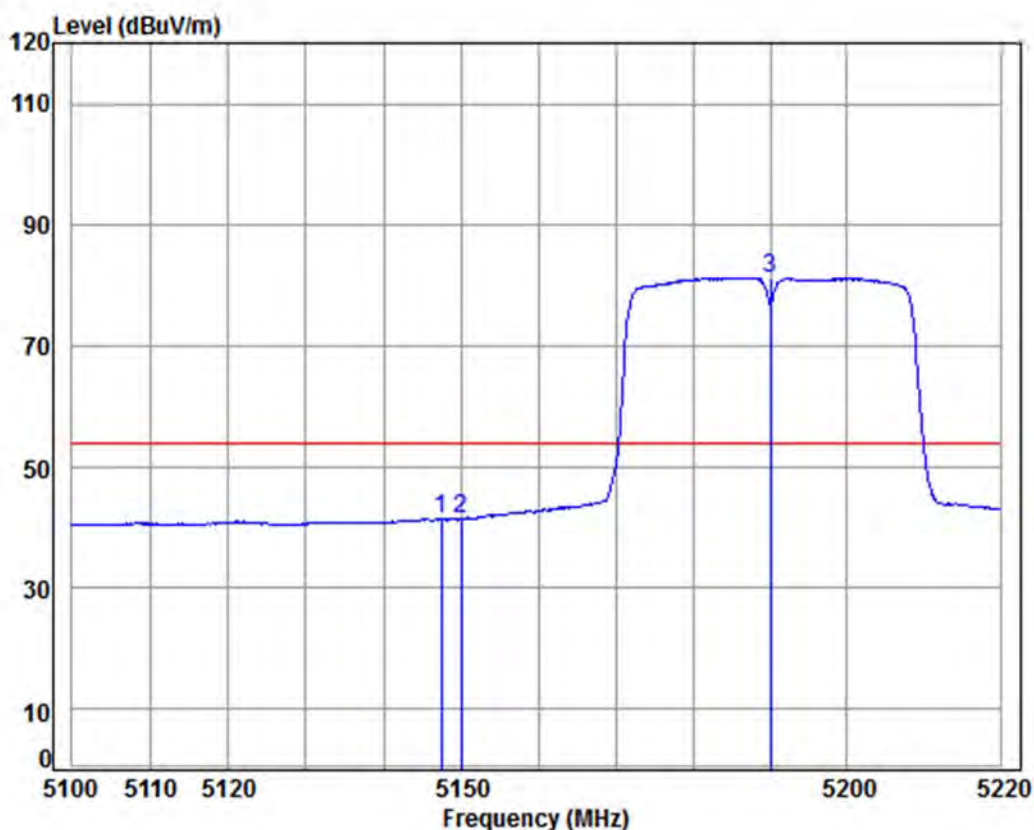

Condition: 3m HORIZONTAL
Job No : 09260RG
Mode : 5190 Band edge
: 5G WiFi 11AC40
: 12

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	5147.426	8.32	34.47	37.40	36.10	41.49	54.00	-12.51	Average
2	5150.000	8.33	34.47	37.40	36.06	41.46	54.00	-12.54	Average
3 pp	5190.000	8.39	34.46	37.42	75.81	81.24	54.00	27.24	Average




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM170800926003

Page: 369 of 411

Test mode:	802.11ac(HT40)	Frequency(MHz):	5230	Peak	Vertical
------------	----------------	-----------------	------	------	----------

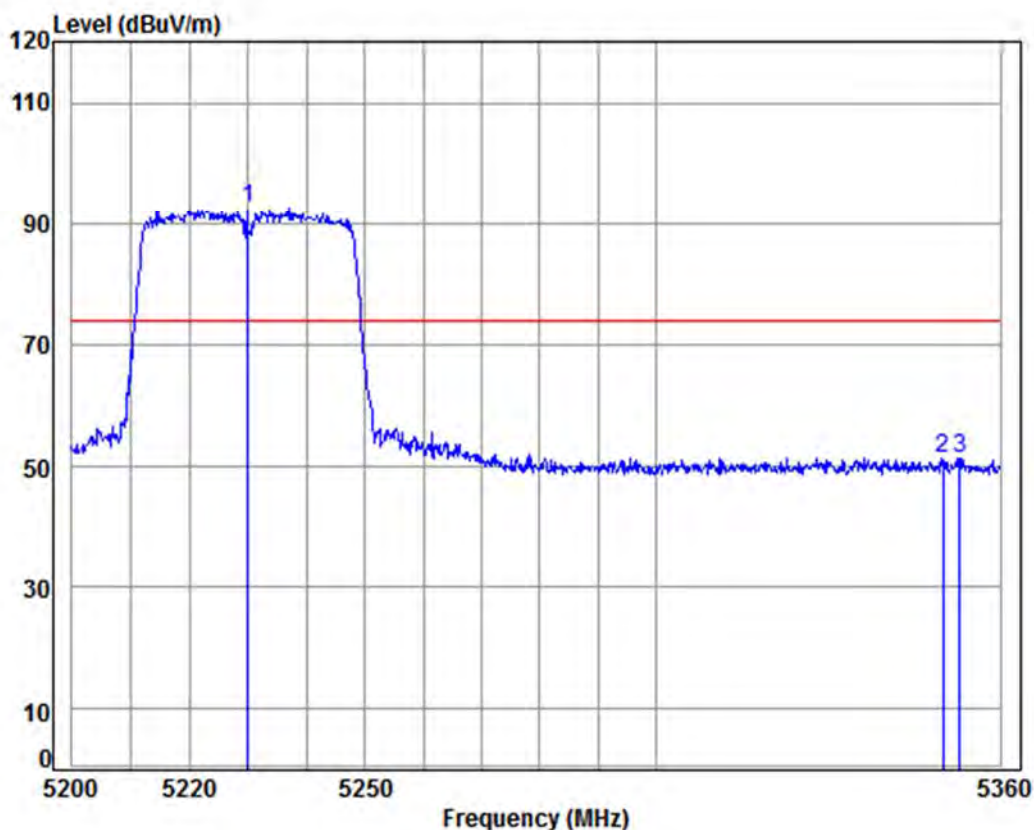

Condition: 3m VERTICAL
Job No : 09260RG
Mode : 5230 Band edge
: 5G WiFi 11AC40
: 12

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1 pp	5230.000	8.45	34.45	37.45	87.01	92.46	74.00	18.46	Peak
2	5350.000	8.63	34.43	37.52	45.63	51.17	74.00	-22.83	Peak
3	5353.020	8.63	34.43	37.52	45.94	51.48	74.00	-22.52	Peak




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM170800926003

Page: 370 of 411

Test mode:	802.11ac(HT40)	Frequency(MHz):	5230	Average	Vertical
------------	----------------	-----------------	------	---------	----------

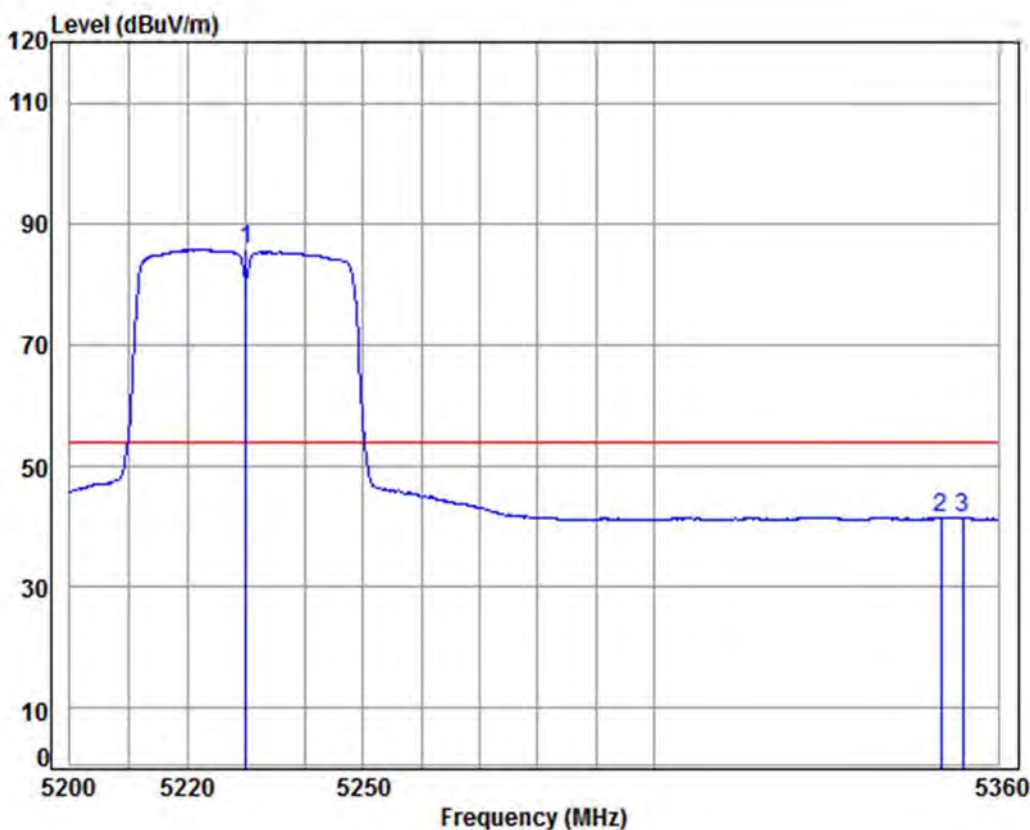

Condition: 3m VERTICAL
Job No : 09260RG
Mode : 5230 Band edge
: 5G WiFi 11AC40
: 12

		Cable	Ant	Preamp	Read	Limit	Over	
	Freq	Loss	Factor	Factor	Level	Line	Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1 pp	5230.000	8.45	34.45	37.45	80.19	85.64	54.00	31.64 Average
2	5350.000	8.63	34.43	37.52	36.07	41.61	54.00	-12.39 Average
3	5353.831	8.64	34.43	37.53	36.03	41.57	54.00	-12.43 Average




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM170800926003

Page: 371 of 411

Test mode:	802.11ac(HT40)	Frequency(MHz):	5230	Peak	Horizontal
------------	----------------	-----------------	------	------	------------

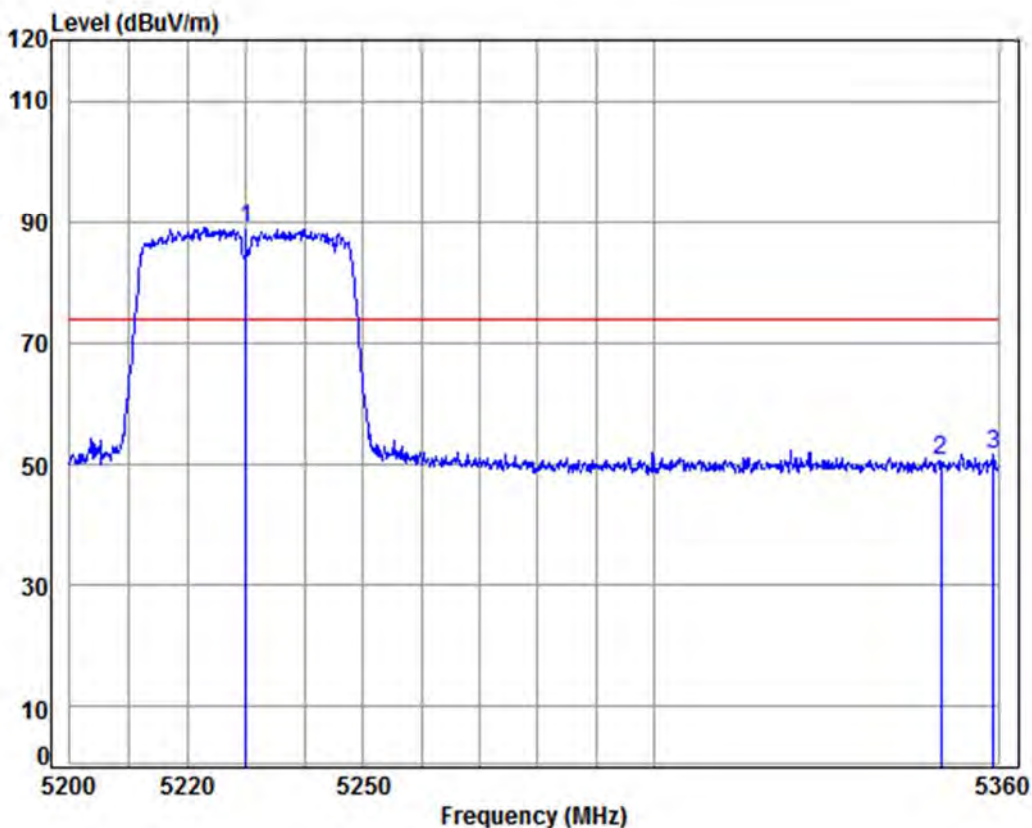

Condition: 3m HORIZONTAL
Job No : 09260RG
Mode : 5230 Band edge
: 5G WiFi 11AC40
: 12

		Cable	Ant	Preamp	Read	Limit	Over	
	Freq	Loss	Factor	Factor	Level	Line	Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1 pp	5230.000	8.45	34.45	37.45	83.43	88.88	74.00	14.88 peak
2	5350.000	8.63	34.43	37.52	45.05	50.59	74.00	-23.41 peak
3	5359.188	8.64	34.43	37.53	46.20	51.74	74.00	-22.26 peak




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM170800926003

Page: 372 of 411

Test mode:	802.11ac(HT40)	Frequency(MHz):	5230	Average	Horizontal
------------	----------------	-----------------	------	---------	------------

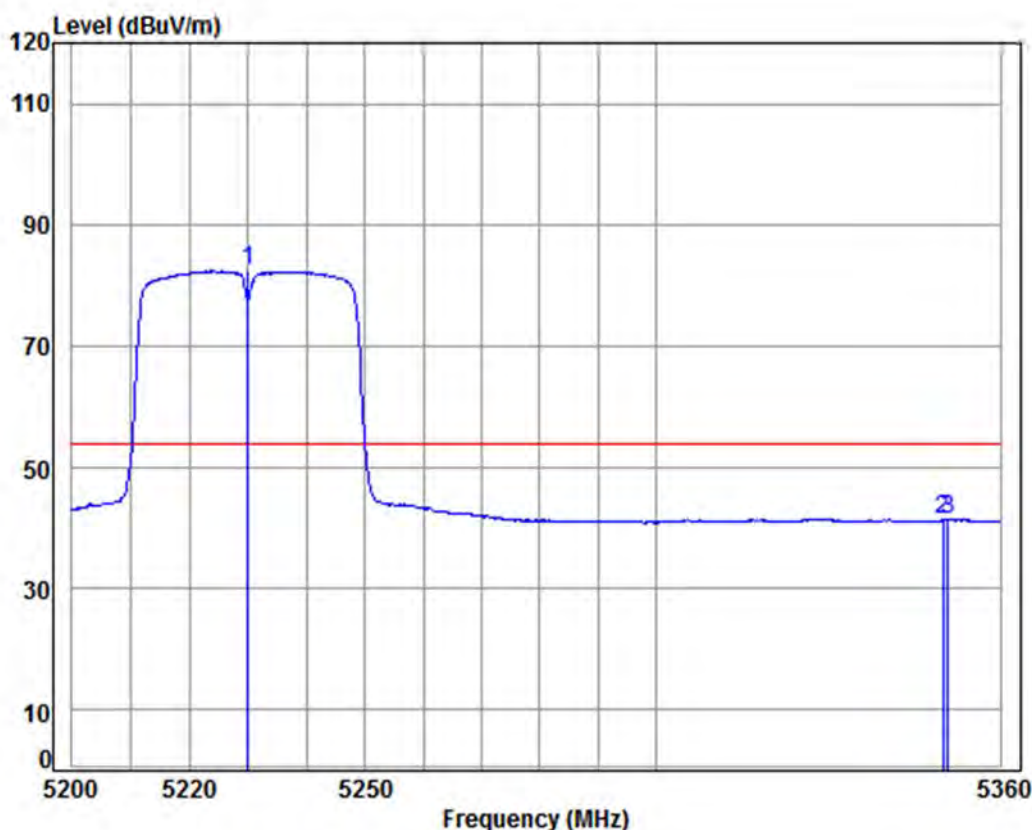

Condition: 3m HORIZONTAL
Job No : 09260RG
Mode : 5230 Band edge
: 5G WiFi 11AC40
: 12

		Cable	Ant	Preamp	Read	Limit	Over	
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1	pp 5230.000	8.45	34.45	37.45	76.85	82.30	54.00	28.30 Average
2	5350.000	8.63	34.43	37.52	35.90	41.44	54.00	-12.56 Average
3	5350.911	8.63	34.43	37.52	35.97	41.51	54.00	-12.49 Average




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM170800926003

Page: 373 of 411

Test mode:	802.11ac(HT40)	Frequency(MHz):	5270	Peak	Vertical
------------	----------------	-----------------	------	------	----------

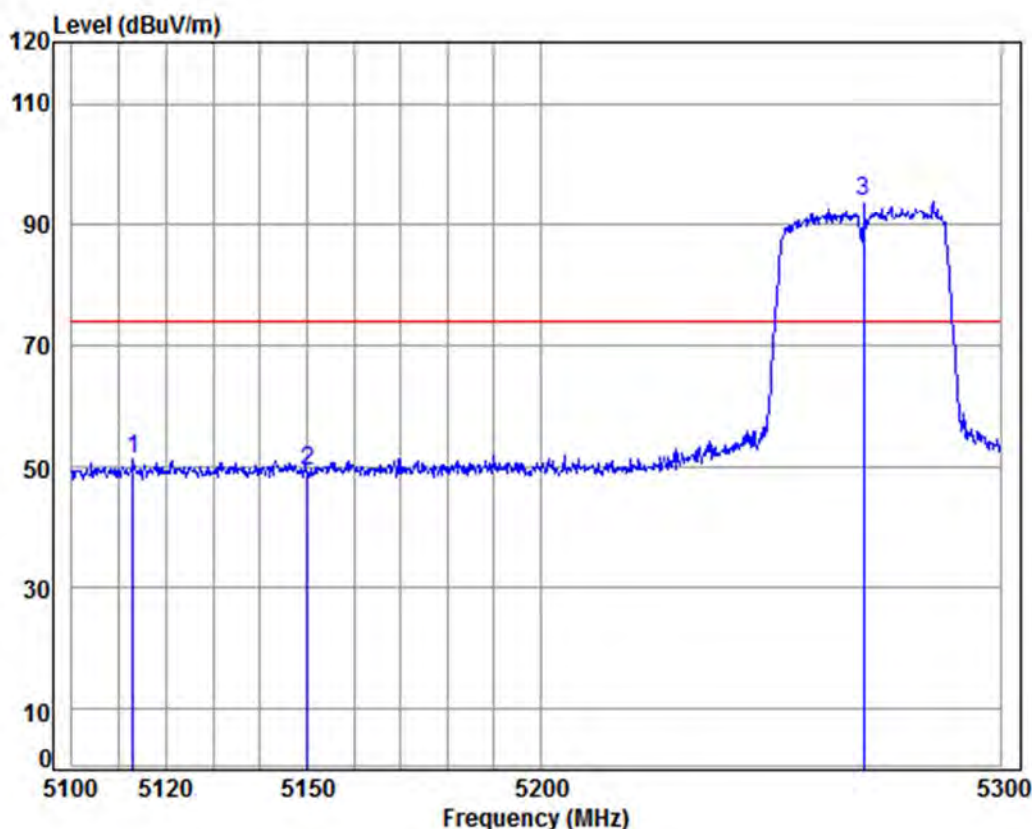

Condition: 3m VERTICAL
Job No : 09260RG
Mode : 5270 Band edge
: 5G WiFi 11AC40
: 12

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	5112.964	8.27	34.48	37.37	45.94	51.32	74.00	-22.68	Peak
2	5150.000	8.33	34.47	37.40	43.95	49.35	74.00	-24.65	Peak
3 pp	5270.000	8.51	34.44	37.47	88.25	93.73	74.00	19.73	Peak




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM170800926003

Page: 374 of 411

Test mode:	802.11ac(HT40)	Frequency(MHz):	5270	Average	Vertical
------------	----------------	-----------------	------	---------	----------

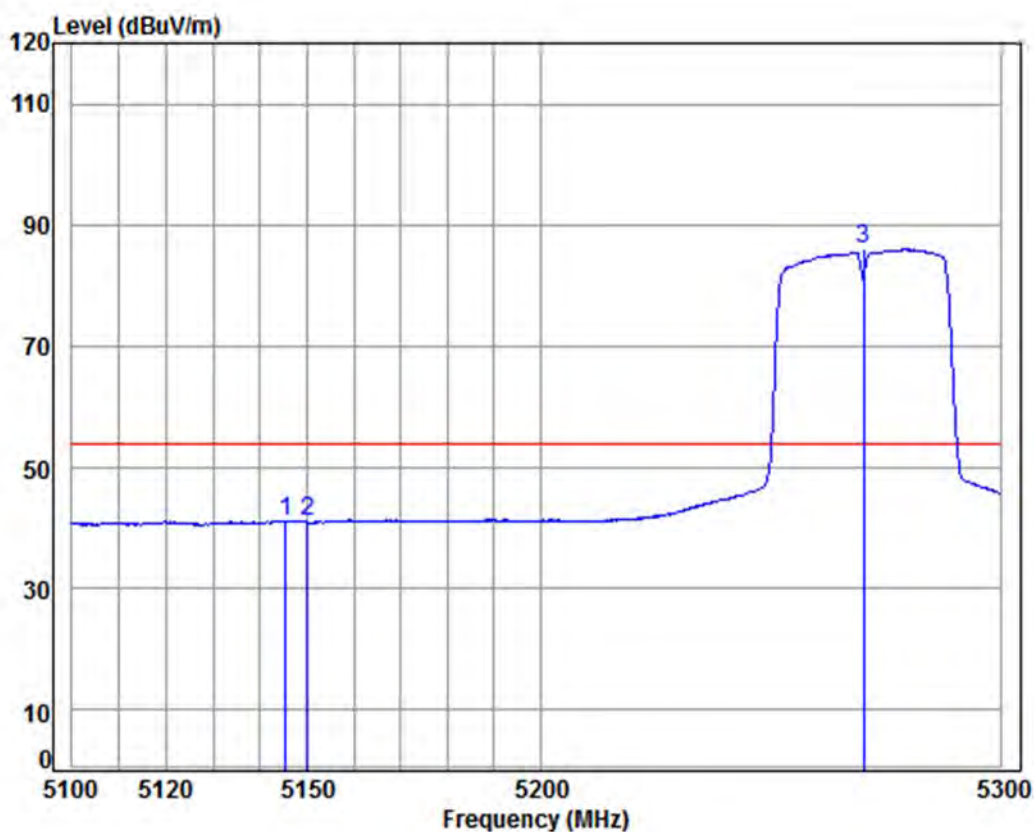

Condition: 3m VERTICAL

Job No : 09260RG

Mode : 5270 Band edge

: 5G WiFi 11AC40

: 12

		Cable	Ant	Preamp	Read	Limit	Over	
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1	5145.321	8.32	34.47	37.39	35.86	41.26	54.00	-12.74 Average
2	5150.000	8.33	34.47	37.40	35.65	41.05	54.00	-12.95 Average
3 pp	5270.000	8.51	34.44	37.47	80.52	86.00	54.00	32.00 Average




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM170800926003

Page: 375 of 411

Test mode:	802.11ac(HT40)	Frequency(MHz):	5270	Peak	Horizontal
------------	----------------	-----------------	------	------	------------

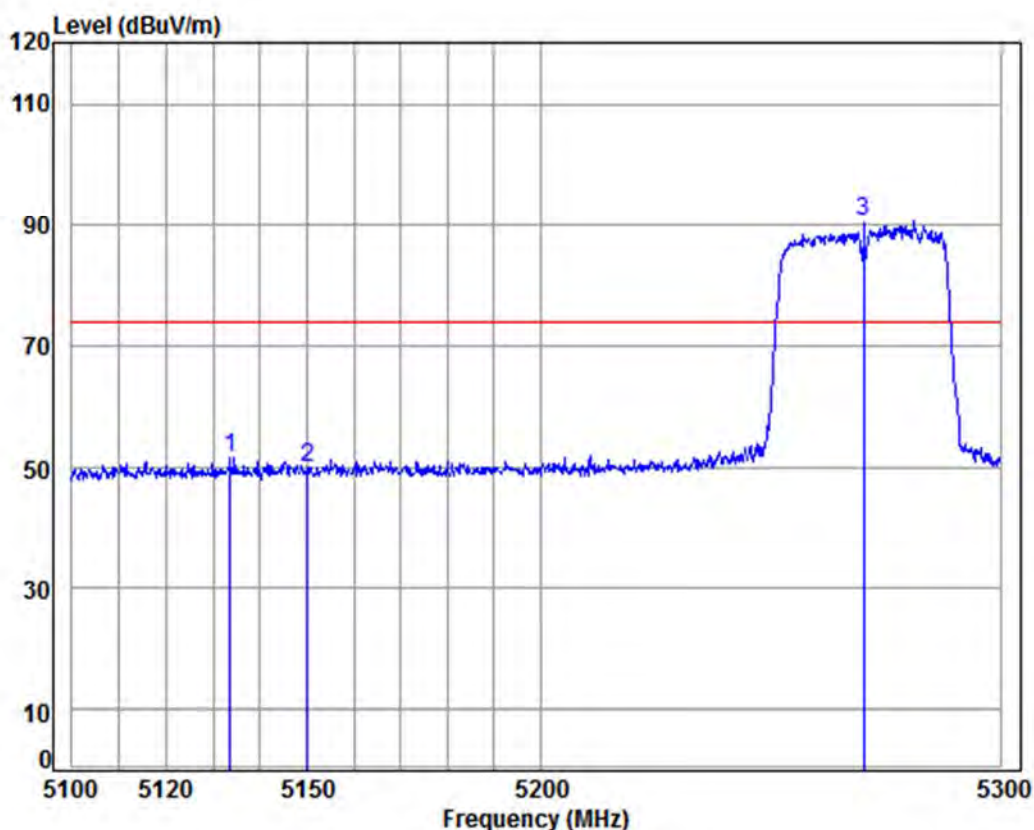

Condition: 3m HORIZONTAL
Job No : 09260RG
Mode : 5270 Band edge
: 5G WiFi 11AC40
: 12

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	5133.657	8.30	34.47	37.39	46.41	51.79	74.00	-22.21	peak
2	5150.000	8.33	34.47	37.40	44.64	50.04	74.00	-23.96	peak
3 pp	5270.000	8.51	34.44	37.47	85.00	90.48	74.00	16.48	peak




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM170800926003

Page: 376 of 411

Test mode:	802.11ac(HT40)	Frequency(MHz):	5270	Average	Horizontal
------------	----------------	-----------------	------	---------	------------

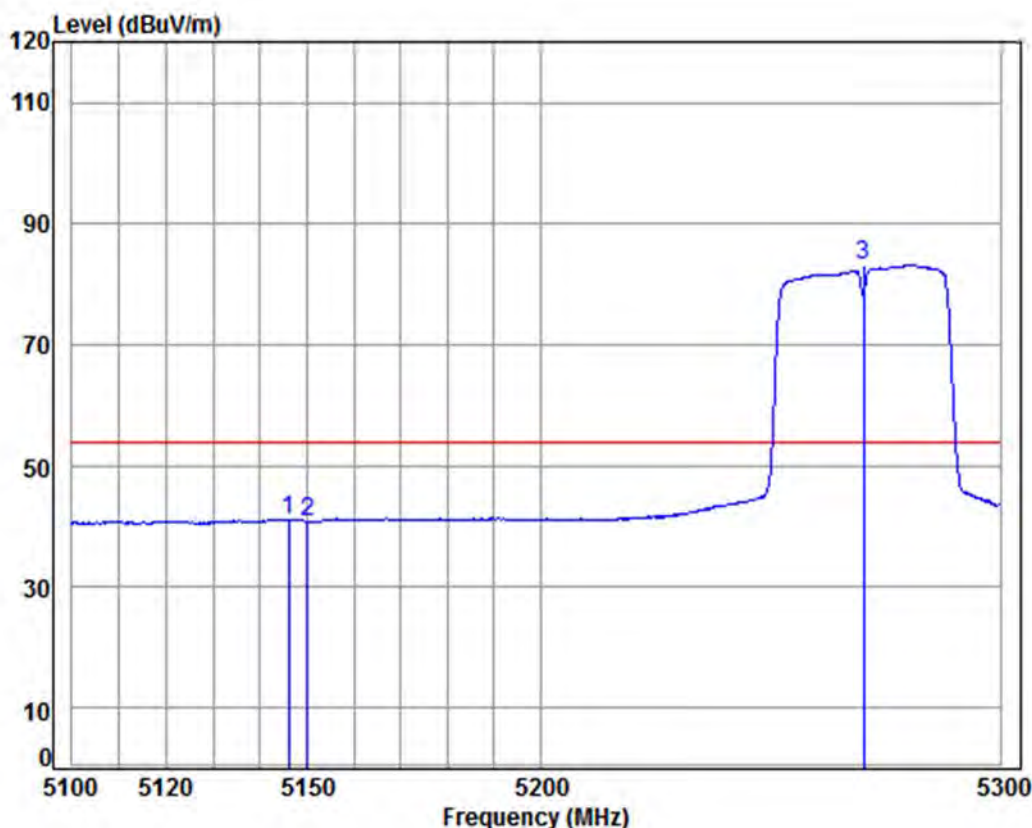

Condition: 3m HORIZONTAL
Job No : 09260RG
Mode : 5270 Band edge
: 5G WiFi 11AC40
: 12

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	5146.113	8.32	34.47	37.39	35.80	41.20	54.00	-12.80	Average
2	5150.000	8.33	34.47	37.40	35.56	40.96	54.00	-13.04	Average
3 pp	5270.000	8.51	34.44	37.47	77.60	83.08	54.00	29.08	Average




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM170800926003

Page: 377 of 411

Test mode:	802.11ac(HT40)	Frequency(MHz):	5310	Peak	Vertical
------------	----------------	-----------------	------	------	----------

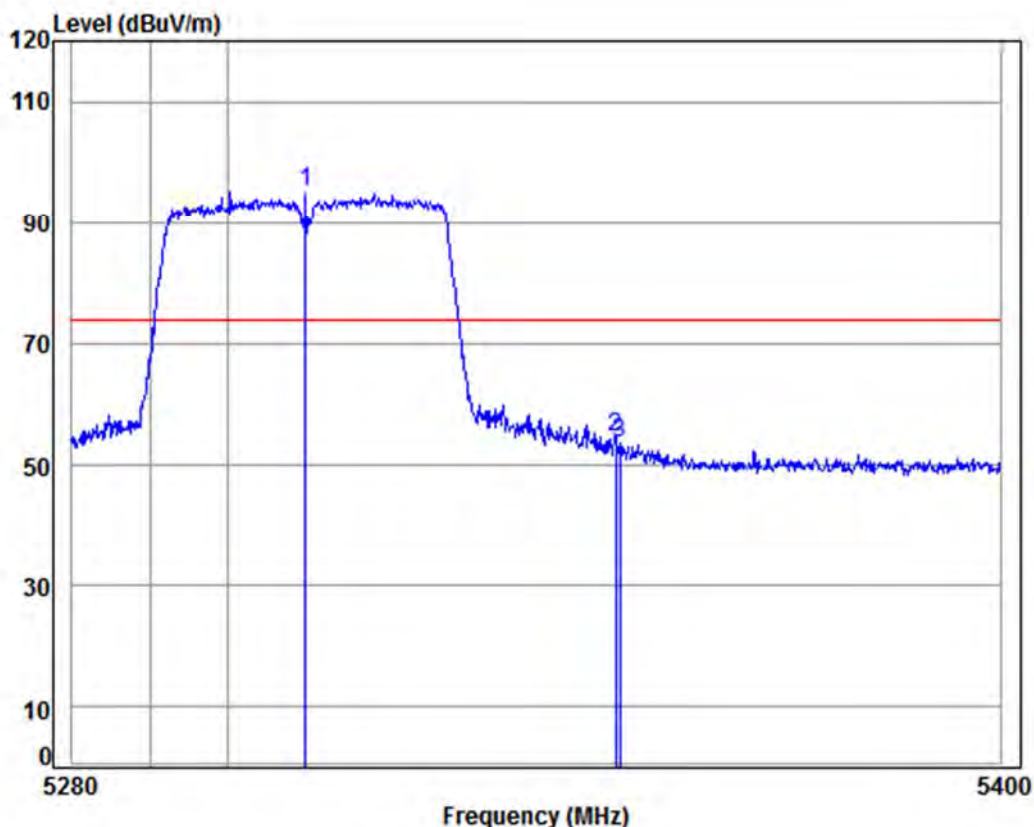

Condition: 3m VERTICAL
Job No : 09260RG
Mode : 5310 Band edge
: 5G WiFi 11AC40
: 12

		Cable	Ant	Preamp	Read	Limit	Over	
	Freq	Loss	Factor	Factor	Level	Line	Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1	pp 5310.000	8.57	34.44	37.50	89.70	95.21	74.00	21.21 Peak
2	5350.000	8.63	34.43	37.52	49.09	54.63	74.00	-19.37 Peak
3	5350.474	8.63	34.43	37.52	48.01	53.55	74.00	-20.45 Peak




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM170800926003

Page: 378 of 411

Test mode:	802.11ac(HT40)	Frequency(MHz):	5310	Average	Vertical
------------	----------------	-----------------	------	---------	----------

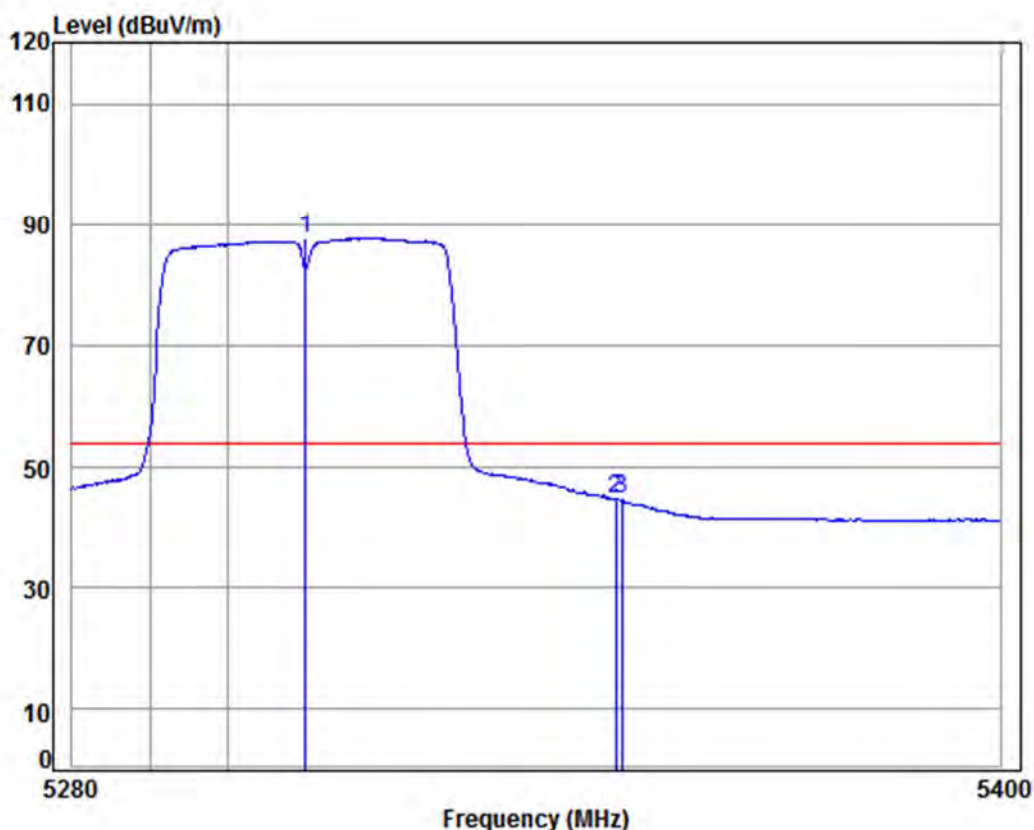

Condition: 3m VERTICAL

Job No : 09260RG

Mode : 5310 Band edge

: 5G WiFi 11AC40

: 12

		Cable	Ant	Preamp	Read	Limit	Over	
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1	pp 5310.000	8.57	34.44	37.50	82.18	87.69	54.00	33.69 Average
2	5350.000	8.63	34.43	37.52	39.28	44.82	54.00	-9.18 Average
3	5350.714	8.63	34.43	37.52	39.11	44.65	54.00	-9.35 Average




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM170800926003

Page: 379 of 411

Test mode:	802.11ac(HT40)	Frequency(MHz):	5310	Peak	Horizontal
------------	----------------	-----------------	------	------	------------

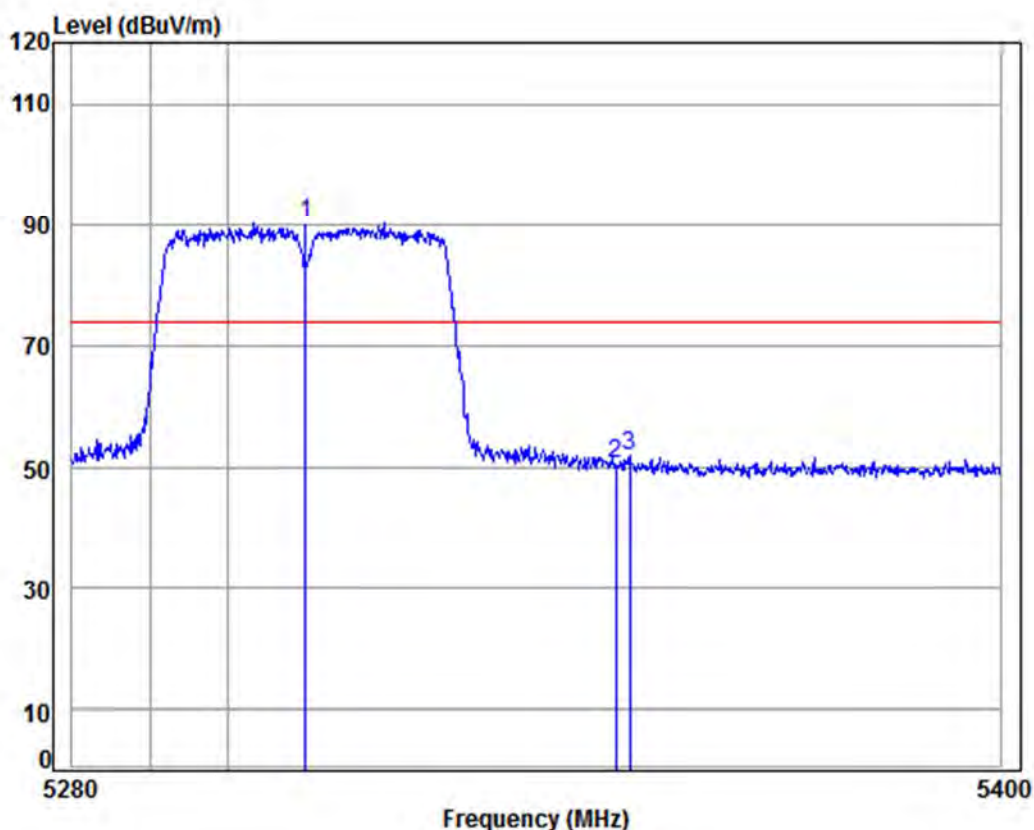

Condition: 3m HORIZONTAL
Job No : 09260RG
Mode : 5310 Band edge
: 5G WiFi 11AC40
: 12

		Cable	Ant	Preamp	Read	Limit	Over	
	Freq	Loss	Factor	Factor	Level	Level	Line	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1	pp 5310.000	8.57	34.44	37.50	84.76	90.27	74.00	16.27 peak
2	5350.000	8.63	34.43	37.52	44.98	50.52	74.00	-23.48 peak
3	5351.796	8.63	34.43	37.52	46.37	51.91	74.00	-22.09 peak




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM170800926003

Page: 380 of 411

Test mode:	802.11ac(HT40)	Frequency(MHz):	5310	Average	Horizontal
------------	----------------	-----------------	------	---------	------------

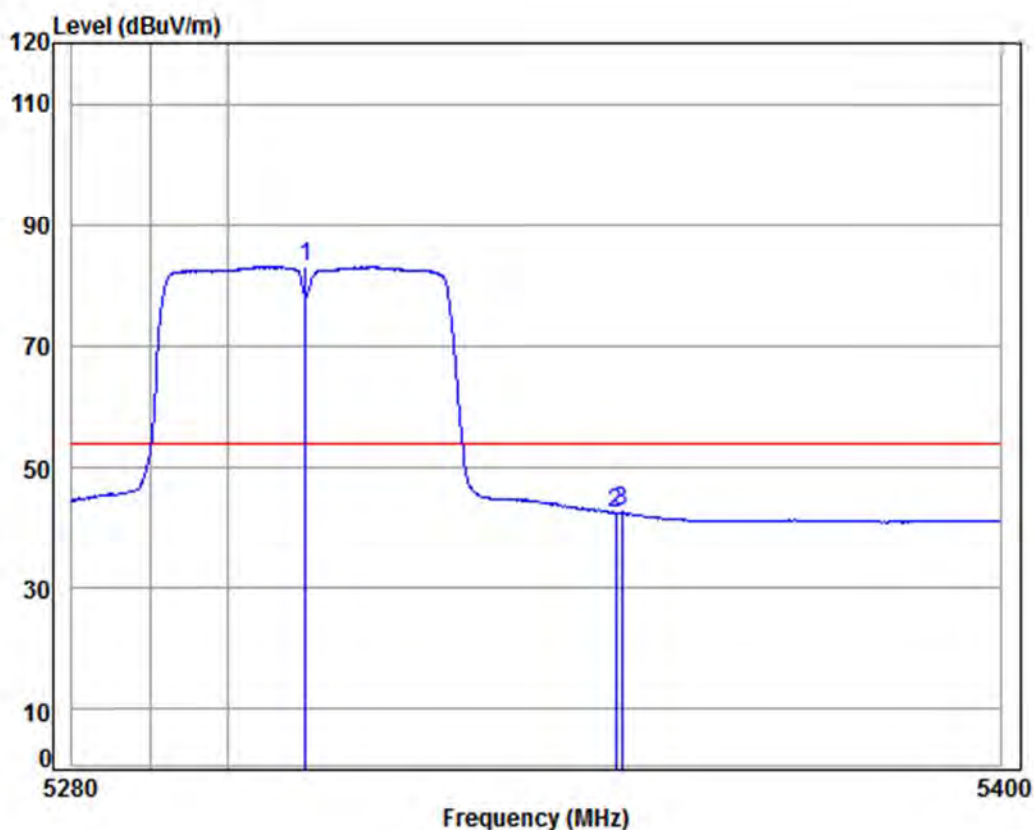

Condition: 3m HORIZONTAL
Job No : 09260RG
Mode : 5310 Band edge
: 5G WiFi 11AC40
: 12

		Cable	Ant	Preamp	Read	Limit	Over	
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1	pp 5310.000	8.57	34.44	37.50	77.50	83.01	54.00	29.01 Average
2	5350.000	8.63	34.43	37.52	37.06	42.60	54.00	-11.40 Average
3	5350.714	8.63	34.43	37.52	37.23	42.77	54.00	-11.23 Average




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM170800926003

Page: 381 of 411

Test mode:	802.11ac(HT40)	Frequency(MHz):	5510	Peak	Vertical
------------	----------------	-----------------	------	------	----------

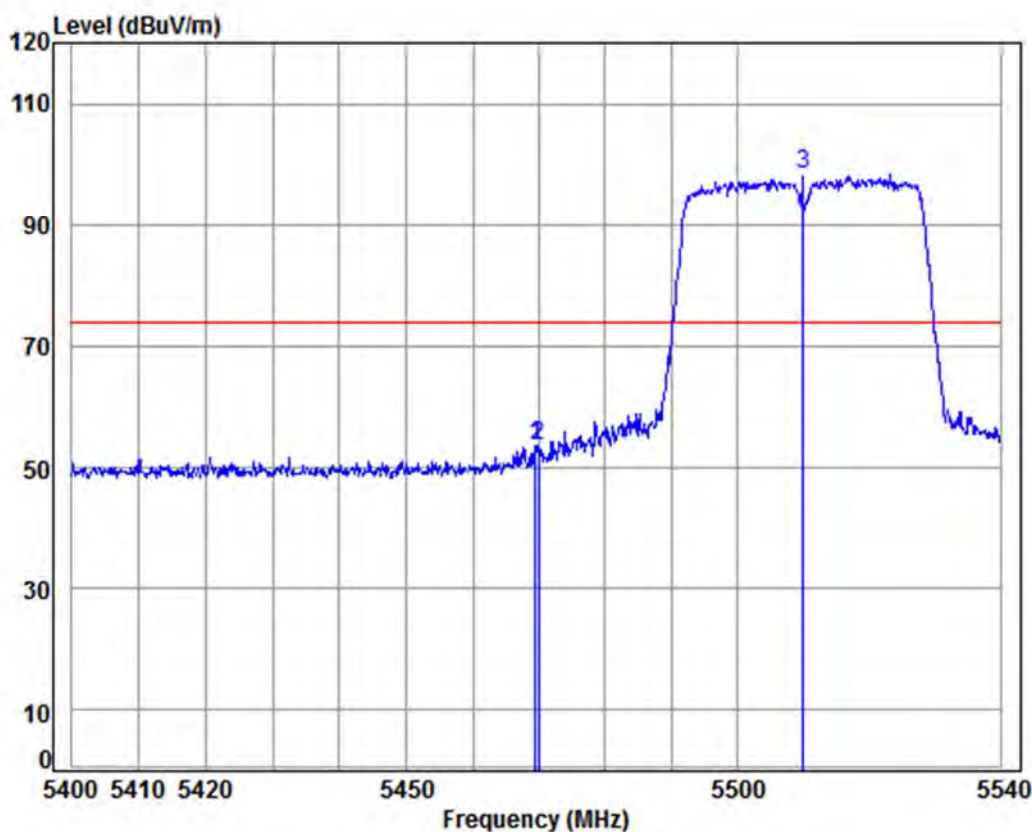

Condition: 3m VERTICAL
Job No : 09260RG
Mode : 5510 Band edge
: 5G WiFi 11AC40
: 12

		Cable	Ant	Preamp	Read	Limit	Over	
	Freq	Loss	Factor	Factor	Level	Line	Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1	5469.552	8.81	34.41	37.60	48.01	53.63	74.00	-20.37 Peak
2	5470.000	8.81	34.41	37.60	48.10	53.72	74.00	-20.28 Peak
3 pp	5510.000	8.89	34.41	37.62	92.75	98.43	74.00	24.43 Peak




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM170800926003

Page: 382 of 411

Test mode:	802.11ac(HT40)	Frequency(MHz):	5510	Average	Vertical
------------	----------------	-----------------	------	---------	----------

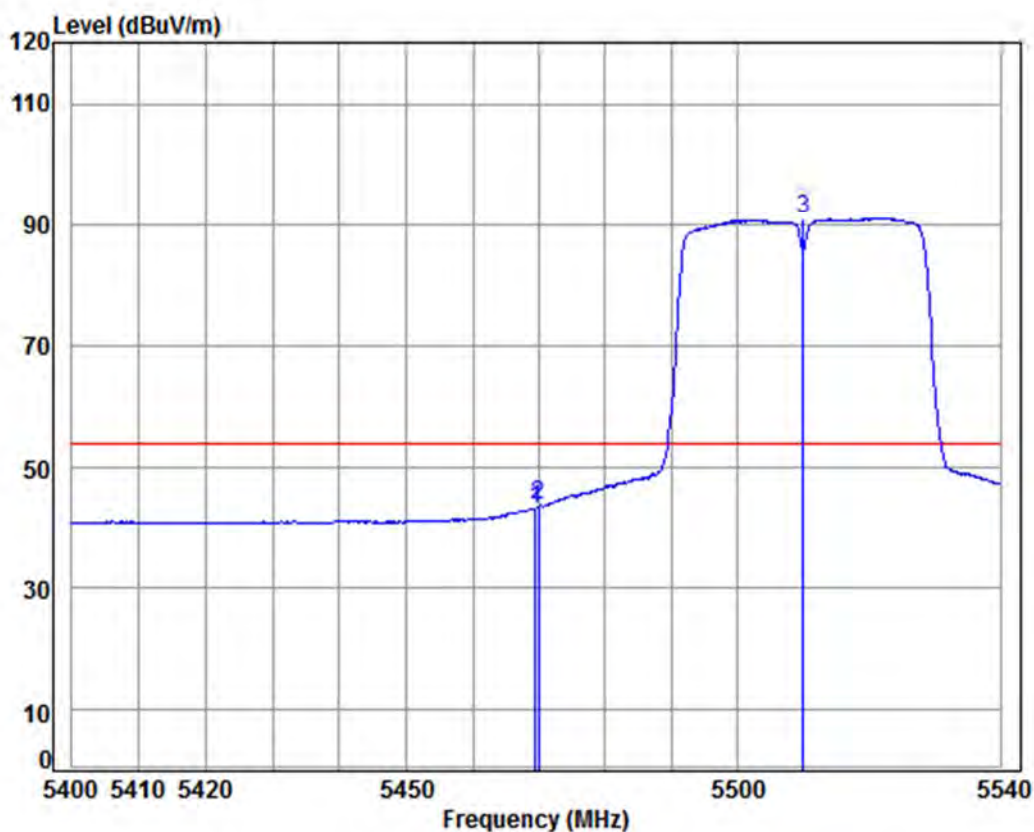

Condition: 3m VERTICAL

Job No : 09260RG

Mode : 5510 Band edge

: 5G WiFi 11AC40

: 12

	Freq	Cable	Ant	Preamp	Read	Limit	Over	
	MHz	Loss	Factor	Factor	Level	Level	Line	Limit Remark
		dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1	5469.552	8.81	34.41	37.60	37.66	43.28	54.00	-10.72 Average
2	5470.000	8.81	34.41	37.60	38.07	43.69	54.00	-10.31 Average
3 pp	5510.000	8.89	34.41	37.62	85.28	90.96	54.00	36.96 Average




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM170800926003

Page: 383 of 411

Test mode:	802.11ac(HT40)	Frequency(MHz):	5510	Peak	Horizontal
------------	----------------	-----------------	------	------	------------

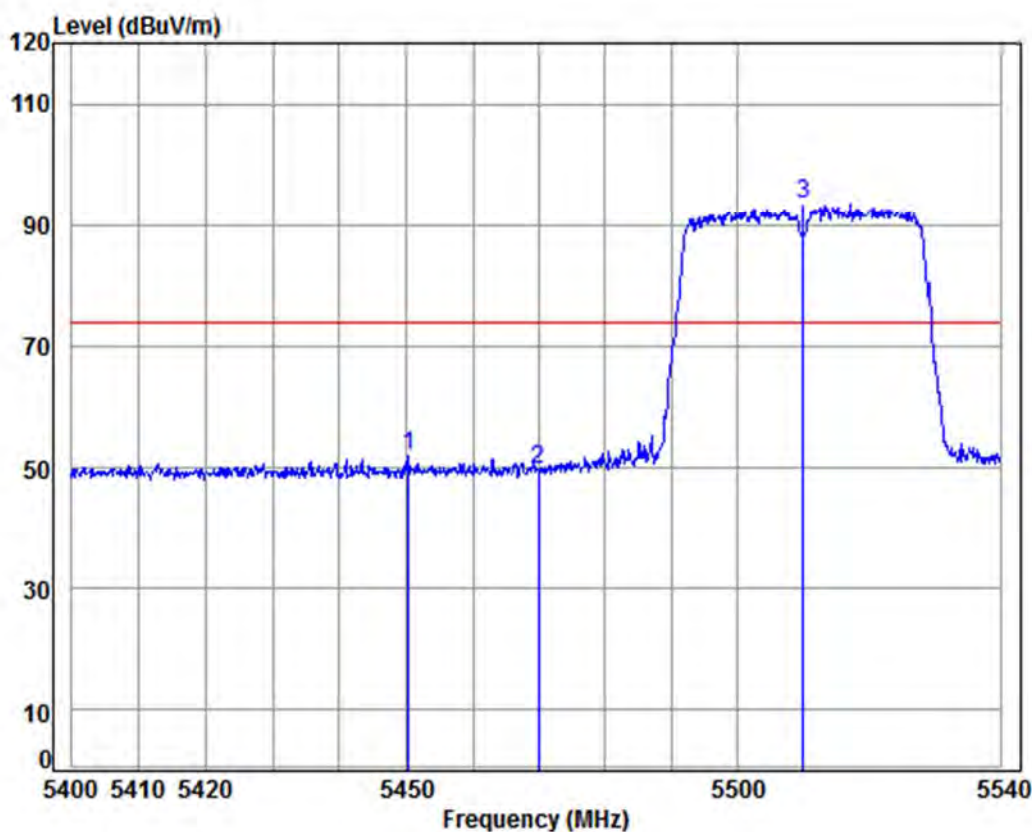

Condition: 3m HORIZONTAL
Job No : 09260RG
Mode : 5510 Band edge
: 5G WiFi 11AC40
: 12

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	5450.406	8.78	34.41	37.58	46.26	51.87	74.00	-22.13	peak
2	5470.000	8.81	34.41	37.60	44.06	49.68	74.00	-24.32	peak
3 pp	5510.000	8.89	34.41	37.62	87.77	93.45	74.00	19.45	peak




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM170800926003

Page: 384 of 411

Test mode:	802.11ac(HT40)	Frequency(MHz):	5510	Average	Horizontal
------------	----------------	-----------------	------	---------	------------

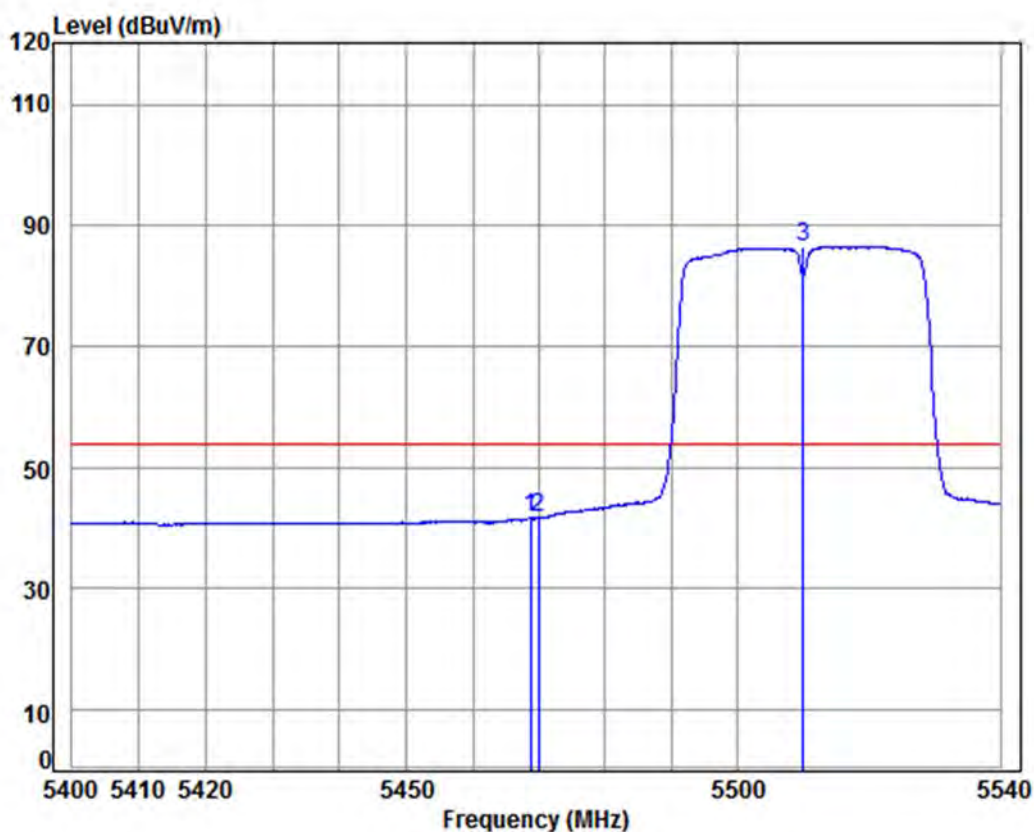

Condition: 3m HORIZONTAL
Job No : 09260RG
Mode : 5510 Band edge
: 5G WiFi 11AC40
: 12

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	5468.712	8.80	34.41	37.59	36.16	41.78	54.00	-12.22	Average
2	5470.000	8.81	34.41	37.60	36.20	41.82	54.00	-12.18	Average
3 pp	5510.000	8.89	34.41	37.62	80.67	86.35	54.00	32.35	Average




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM170800926003

Page: 385 of 411

Test mode:	802.11ac(HT40)	Frequency(MHz):	5670	Peak	Vertical
------------	----------------	-----------------	------	------	----------

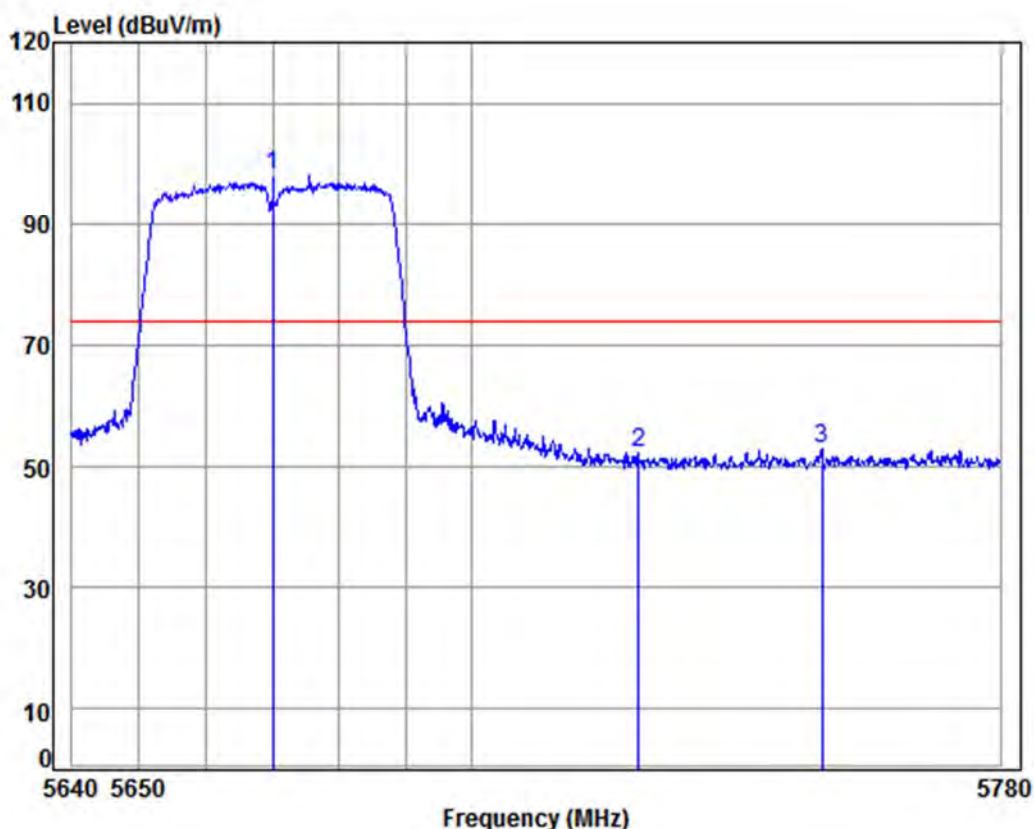

Condition: 3m VERTICAL
Job No : 09260RG
Mode : 5670 Band edge
: 5G WiFi 11AC40
: 12

		Cable	Ant	Preamp	Read	Limit	Over	
	Freq	Loss	Factor	Factor	Level	Line	Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1	pp 5670.000	9.45	34.50	37.71	91.89	98.13	74.00	24.13 Peak
2	5725.000	9.64	34.54	37.75	45.84	52.27	74.00	-21.73 Peak
3	5752.853	9.74	34.55	37.76	46.56	53.09	74.00	-20.91 Peak




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM170800926003

Page: 386 of 411

Test mode:	802.11ac(HT40)	Frequency(MHz):	5670	Average	Vertical
------------	----------------	-----------------	------	---------	----------

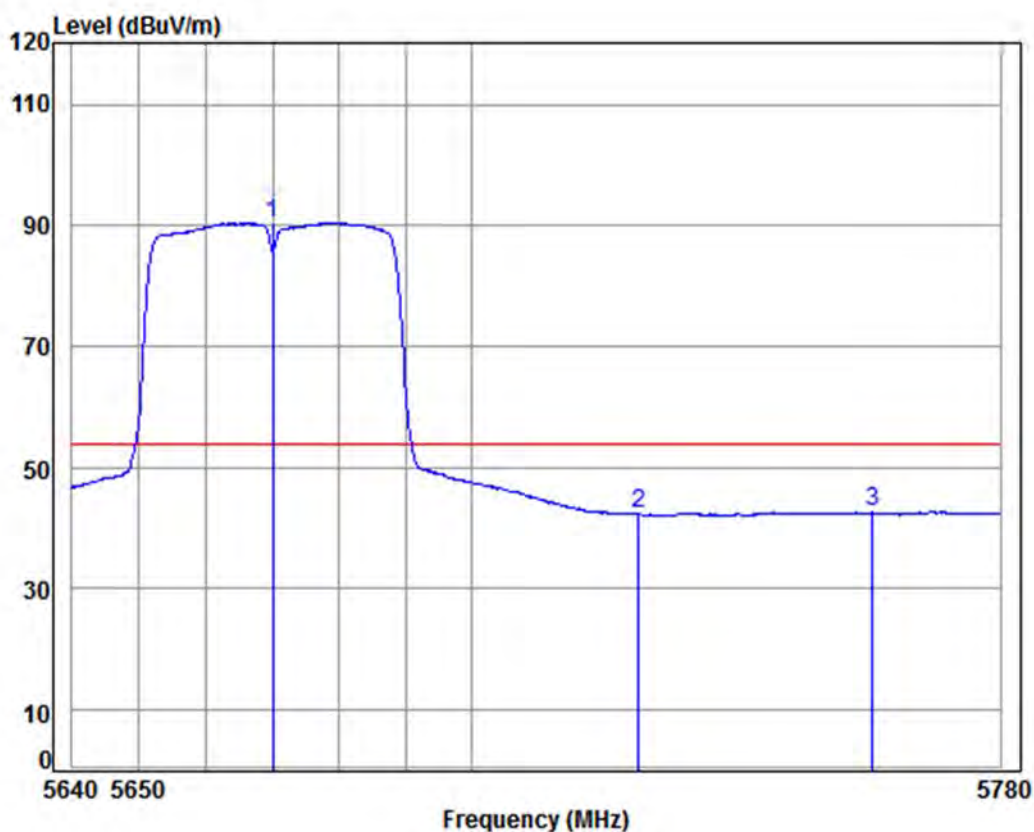

Condition: 3m VERTICAL

Job No : 09260RG

Mode : 5670 Band edge

: 5G WiFi 11AC40

: 12

		Cable	Ant	Preamp	Read	Limit	Over	
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1	pp 5670.000	9.45	34.50	37.71	84.04	90.28	54.00	36.28 Average
2	5725.000	9.64	34.54	37.75	36.06	42.49	54.00	-11.51 Average
3	5760.475	9.76	34.56	37.77	36.20	42.75	54.00	-11.25 Average




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM170800926003

Page: 387 of 411

Test mode:	802.11ac(HT40)	Frequency(MHz):	5670	Peak	Horizontal
------------	----------------	-----------------	------	------	------------

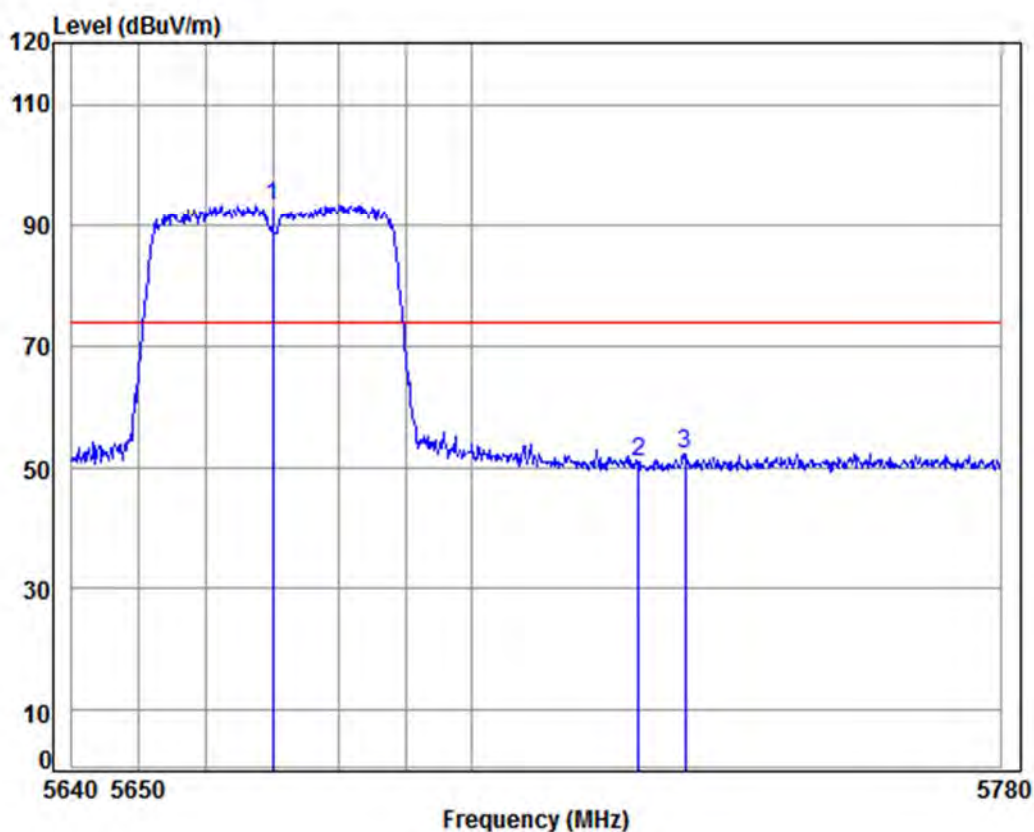

Condition: 3m HORIZONTAL
Job No : 09260RG
Mode : 5670 Band edge
: 5G WiFi 11AC40
: 12

		Cable	Ant	Preamp	Read	Limit	Over	
	Freq	Loss	Factor	Factor	Level	Level	Line	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1	pp 5670.000	9.45	34.50	37.71	87.11	93.35	74.00	19.35 peak
2	5725.000	9.64	34.54	37.75	44.65	51.08	74.00	-22.92 peak
3	5732.155	9.67	34.54	37.75	45.97	52.43	74.00	-21.57 peak




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM170800926003

Page: 388 of 411

Test mode:	802.11ac(HT40)	Frequency(MHz):	5670	Average	Horizontal
------------	----------------	-----------------	------	---------	------------

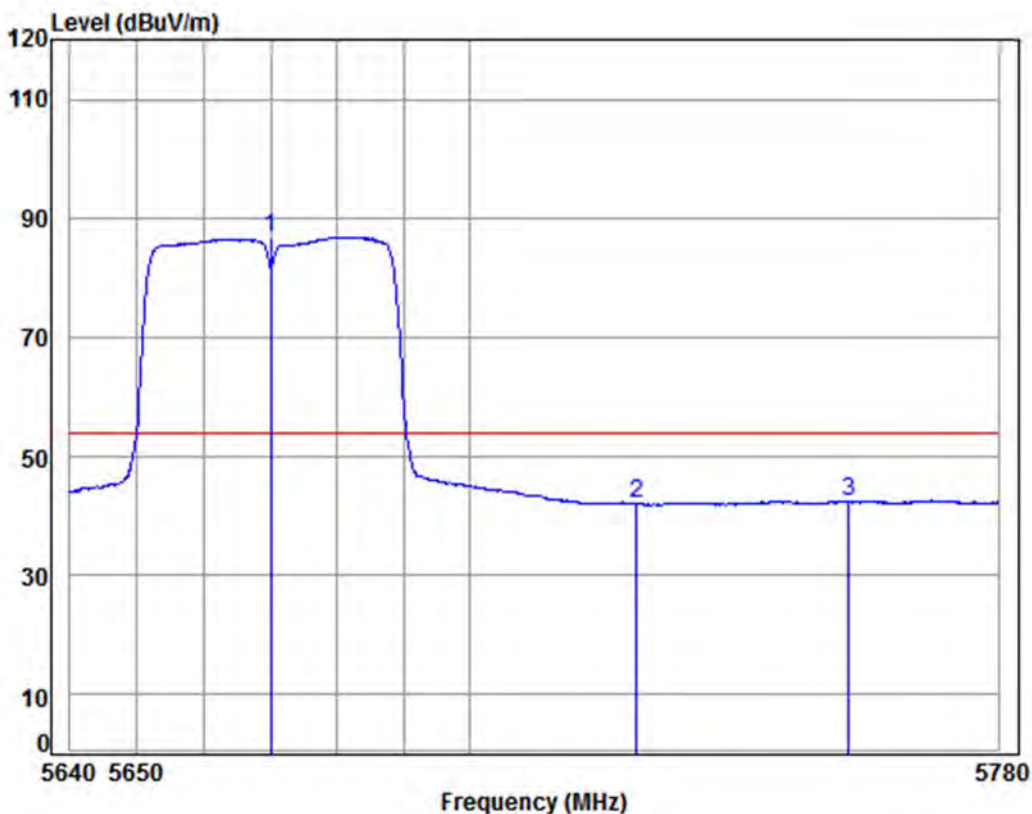

Condition: 3m HORIZONTAL
Job No : 09260RG
Mode : 5670 Band edge
: 5G WiFi 11AC40
: 12

		Cable	Ant	Preamp	Read	Limit	Over	
	Freq	Loss	Factor	Factor	Level	Line	Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1	pp 5670.000	9.45	34.50	37.71	80.52	86.76	54.00	32.76 Average
2	5725.000	9.64	34.54	37.75	35.70	42.13	54.00	-11.87 Average
3	5757.228	9.75	34.56	37.76	36.00	42.55	54.00	-11.45 Average




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM170800926003

Page: 389 of 411

Test mode:	802.11ac(HT40)	Frequency(MHz):	5755	Peak	Vertical
------------	----------------	-----------------	------	------	----------

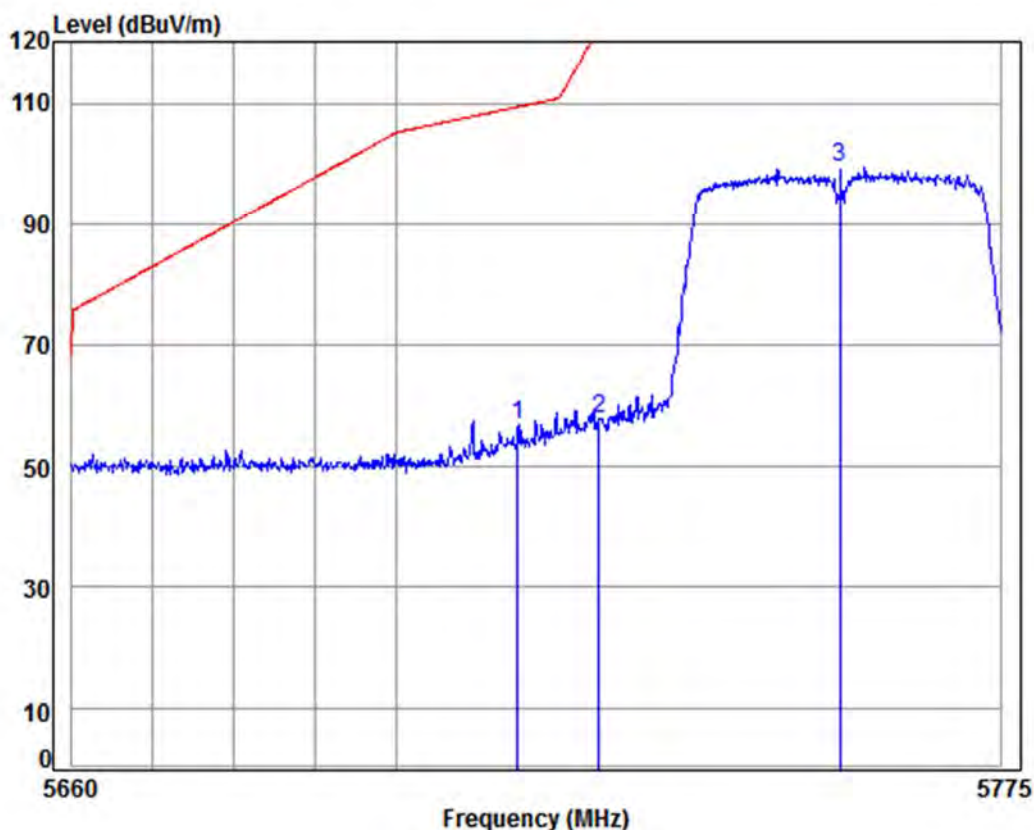

Condition: 3m VERTICAL

Job No : 09260RG

Mode : 5755 Band edge

: 5G WiFi 11AC40

		Cable	Ant	Preamp	Read		Limit	Over	
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	5715.000	9.61	34.53	37.74	50.48	56.88	109.40	-52.52	peak
2	5725.000	9.64	34.54	37.75	51.60	58.03	122.20	-64.17	peak
3	5755.000	9.75	34.56	37.76	92.71	99.26	125.20	-25.94	peak




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM170800926003

Page: 390 of 411

Test mode:	802.11ac(HT40)	Frequency(MHz):	5755	Peak	Horizontal
------------	----------------	-----------------	------	------	------------

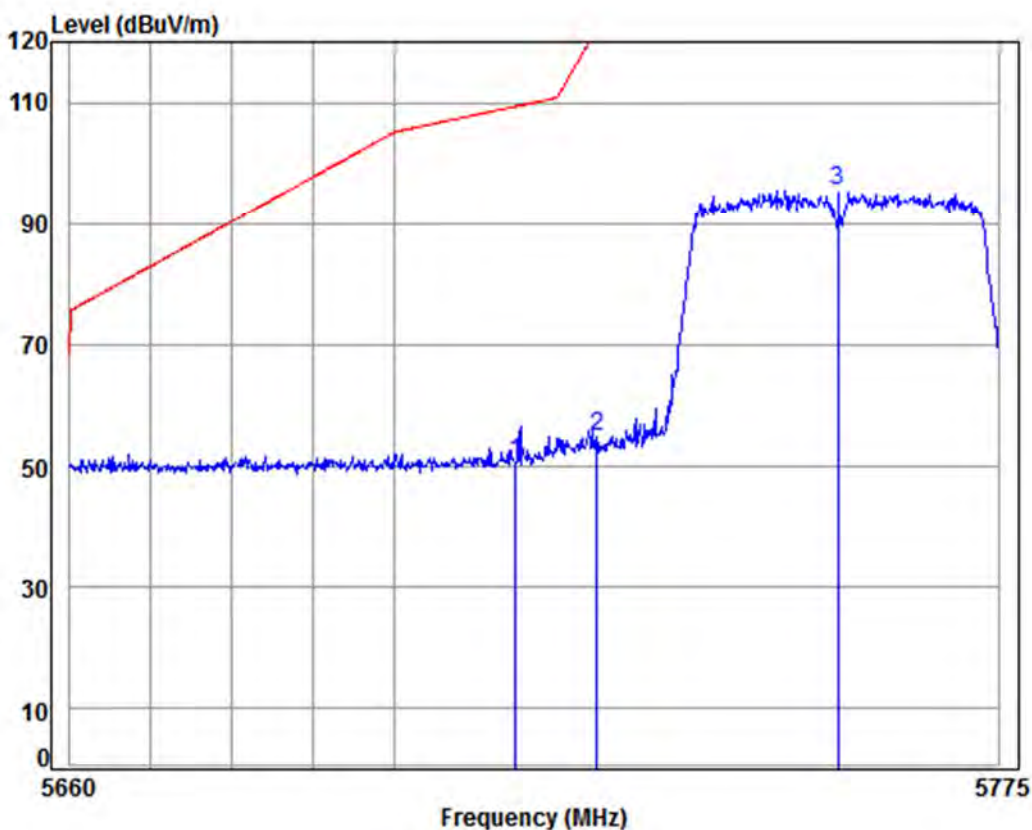

Condition: 3m HORIZONTAL

Job No : 09260RG

Mode : 5755 Band edge

: 5G WiFi 11AC40

		Cable	Ant	Preamp	Read		Limit	Over	
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	5715.000	9.61	34.53	37.74	44.42	50.82	109.40	-58.58	peak
2	5725.000	9.64	34.54	37.75	48.44	54.87	122.20	-67.33	peak
3 pp	5755.000	9.75	34.56	37.76	89.07	95.62	125.20	-29.58	peak




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM170800926003

Page: 391 of 411

Test mode:	802.11ac(HT40)	Frequency(MHz):	5795	Peak	Vertical
------------	----------------	-----------------	------	------	----------

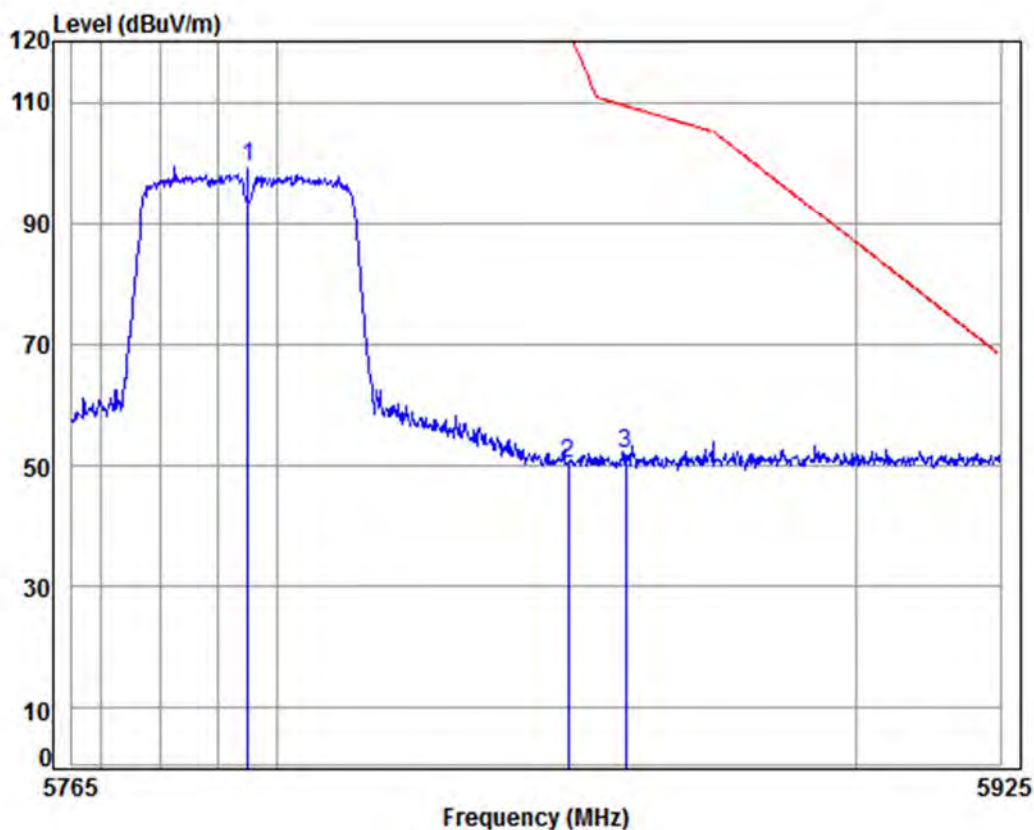

Condition: 3m VERTICAL

Job No : 09260RG

Mode : 5795 Band edge

: 5G WiFi 11AC40

		Cable	Ant	Preamp	Read	Limit	Over		
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	pp 5795.000	9.88	34.58	37.79	92.69	99.36	125.20	-25.84	peak
2	5850.000	10.07	34.61	37.82	43.40	50.26	122.20	-71.94	peak
3	5860.000	10.10	34.62	37.82	45.17	52.07	109.40	-57.33	peak




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM170800926003

Page: 392 of 411

Test mode:	802.11ac(HT40)	Frequency(MHz):	5795	Peak	Horizontal
------------	----------------	-----------------	------	------	------------

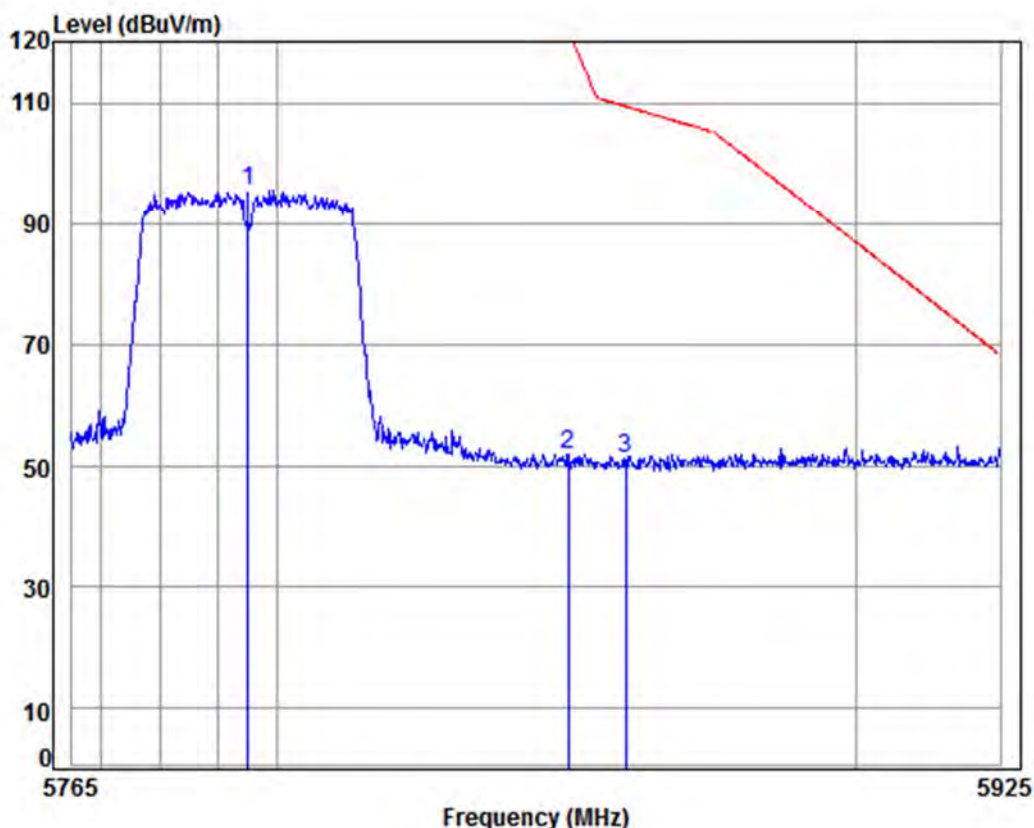

Condition: 3m HORIZONTAL

Job No : 09260RG

Mode : 5795 Band edge

: 5G WiFi 11AC40

		Cable	Ant	Preamp	Read		Limit	Over	
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1 pp	5795.000	9.88	34.58	37.79	88.68	95.35	125.20	-29.85	peak
2	5850.000	10.07	34.61	37.82	45.21	52.07	122.20	-70.13	peak
3	5860.000	10.10	34.62	37.82	44.31	51.21	109.40	-58.19	peak




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM170800926003

Page: 393 of 411

Test mode:	802.11ac(HT80)	Frequency(MHz):	5210	Peak	Vertical
------------	----------------	-----------------	------	------	----------

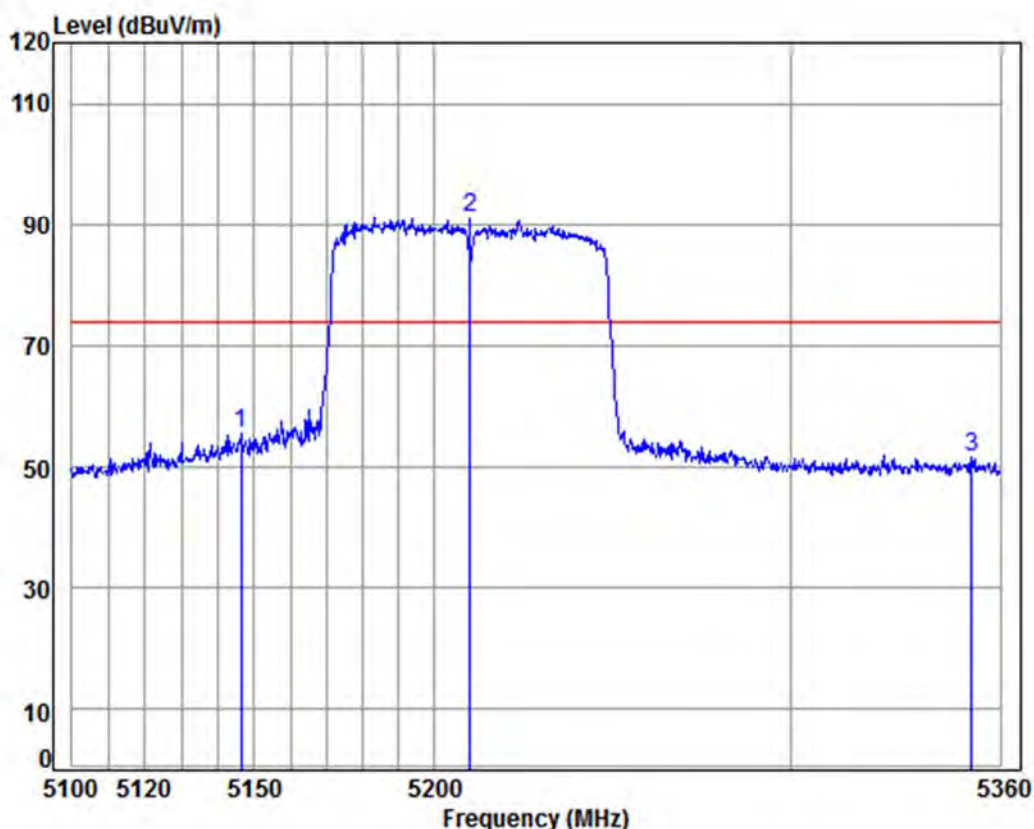

Condition: 3m VERTICAL
Job No : 09260RG
Mode : 5210 Band edge
: 5G WiFi 11AC80
: 12

		Cable	Ant	Preamp	Read	Limit	Over	
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1	5146.363	8.32	34.47	37.39	50.29	55.69	74.00	-18.31 Peak
2	pp 5210.000	8.42	34.46	37.44	85.95	91.39	74.00	17.39 Peak
3	5351.744	8.63	34.43	37.52	46.15	51.69	74.00	-22.31 Peak




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM170800926003

Page: 394 of 411

Test mode:	802.11ac(HT80)	Frequency(MHz):	5210	Average	Vertical
------------	----------------	-----------------	------	---------	----------

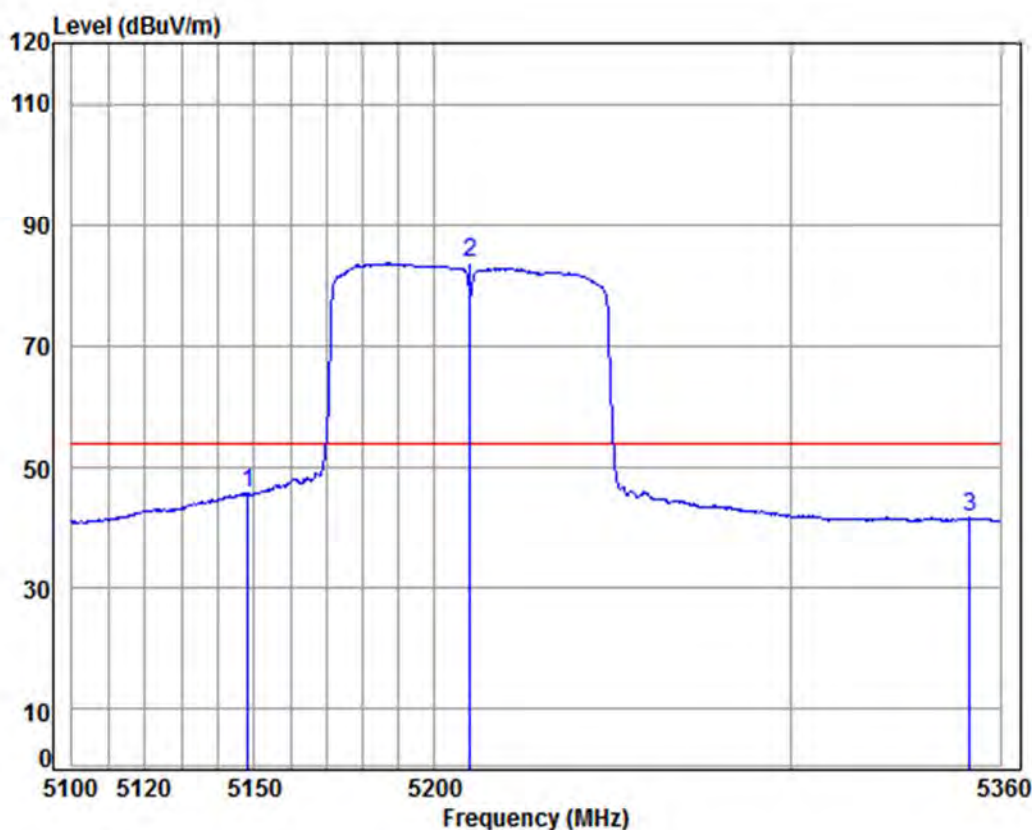

Condition: 3m VERTICAL

Job No : 09260RG

Mode : 5210 Band edge

: 5G WiFi 11AC80

: 12

		Cable	Ant	Preamp	Read	Limit	Over	
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1	5148.410	8.32	34.47	37.40	40.39	45.78	54.00	-8.22 Average
2	pp 5210.000	8.42	34.46	37.44	78.16	83.60	54.00	29.60 Average
3	5351.212	8.63	34.43	37.52	36.17	41.71	54.00	-12.29 Average




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM170800926003

Page: 395 of 411

Test mode:	802.11ac(HT80)	Frequency(MHz):	5210	Peak	Horizontal
------------	----------------	-----------------	------	------	------------

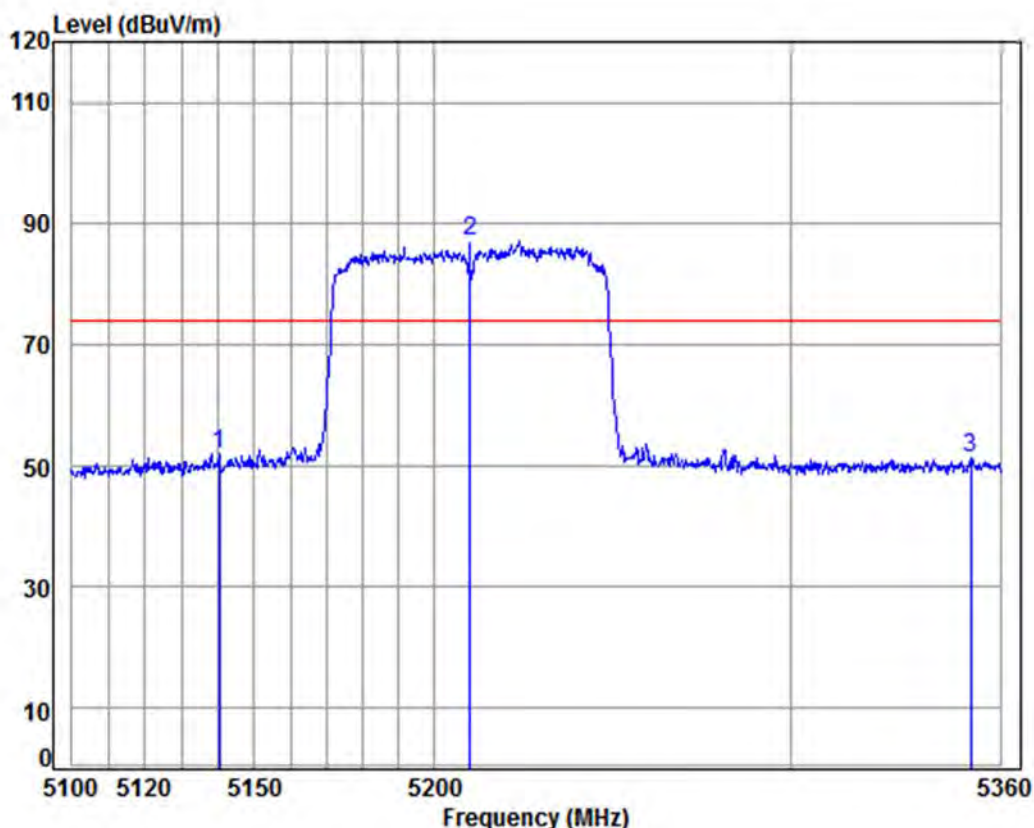

Condition: 3m HORIZONTAL
Job No : 09260RG
Mode : 5210 Band edge
: 5G WiFi 11AC80
: 12

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Limit Level	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1	5140.480	8.31	34.47	37.39	46.56	51.95	74.00	-22.05 peak
2	pp 5210.000	8.42	34.46	37.44	81.58	87.02	74.00	13.02 peak
3	5351.478	8.63	34.43	37.52	45.89	51.43	74.00	-22.57 peak




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM170800926003

Page: 396 of 411

Test mode:	802.11ac(HT80)	Frequency(MHz):	5210	Average	Horizontal
------------	----------------	-----------------	------	---------	------------

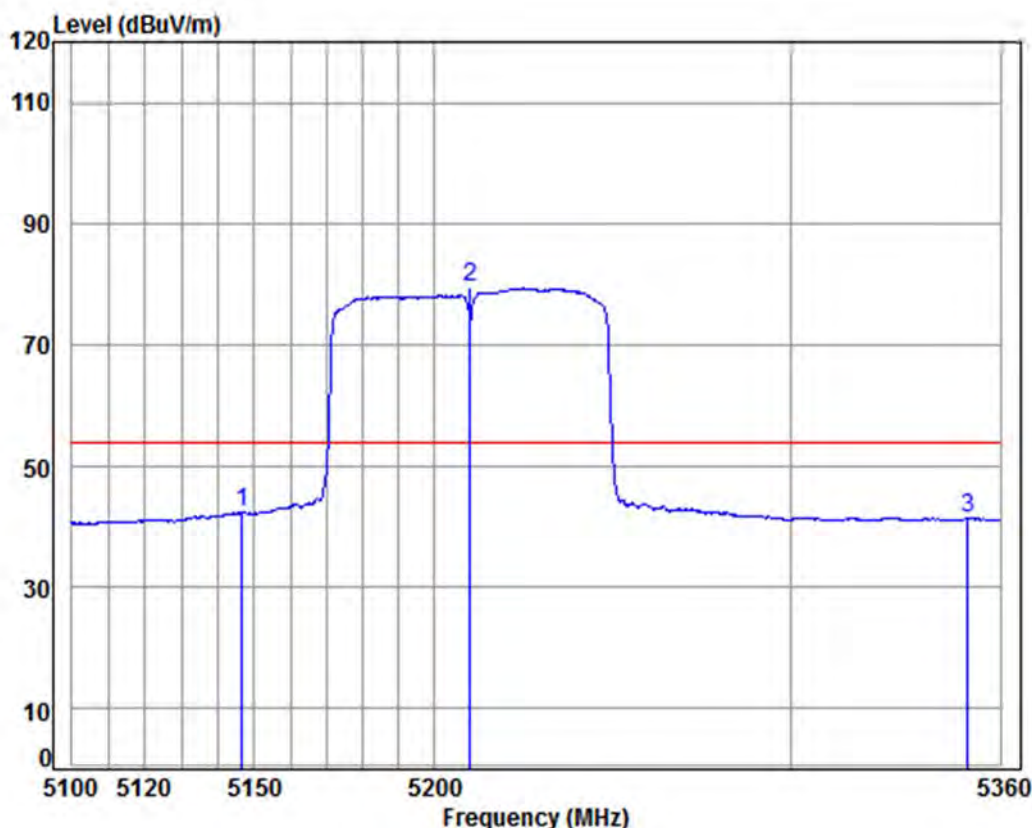

Condition: 3m HORIZONTAL
Job No : 09260RG
Mode : 5210 Band edge
: 5G WiFi 11AC80
: 12

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	5146.619	8.32	34.47	37.40	37.13	42.52	54.00	-11.48	Average
2	pp 5210.000	8.42	34.46	37.44	73.85	79.29	54.00	25.29	Average
3	5350.680	8.63	34.43	37.52	35.99	41.53	54.00	-12.47	Average




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM170800926003

Page: 397 of 411

Test mode:	802.11ac(HT80)	Frequency(MHz):	5290	Peak	Vertical
------------	----------------	-----------------	------	------	----------

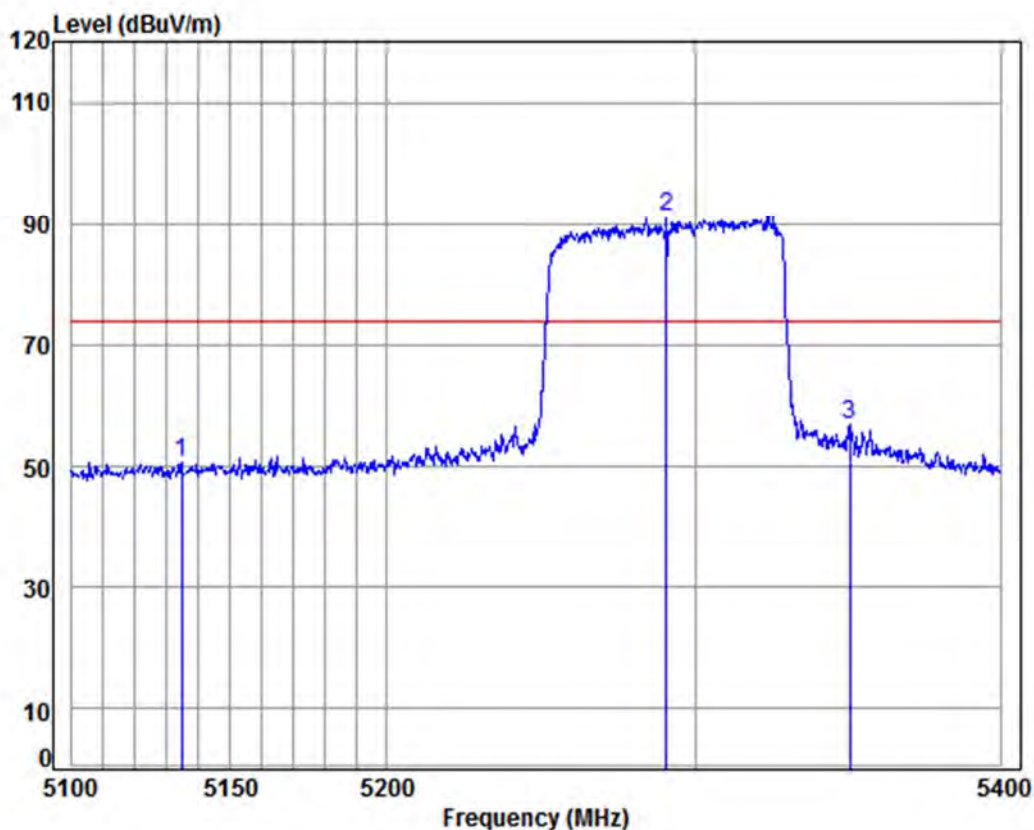

Condition: 3m VERTICAL
Job No : 09260RG
Mode : 5290 Band edge
: 5G WiFi 11AC80
: 12

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	5134.514	8.30	34.47	37.39	45.22	50.60	74.00	-23.40	Peak
2	pp 5290.000	8.54	34.44	37.49	85.87	91.36	74.00	17.36	Peak
3	5350.229	8.63	34.43	37.52	51.31	56.85	74.00	-17.15	Peak




SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch

Report No.: SZEM170800926003

Page: 398 of 411

Test mode:	802.11ac(HT80)	Frequency(MHz):	5290	Average	Vertical
------------	----------------	-----------------	------	---------	----------

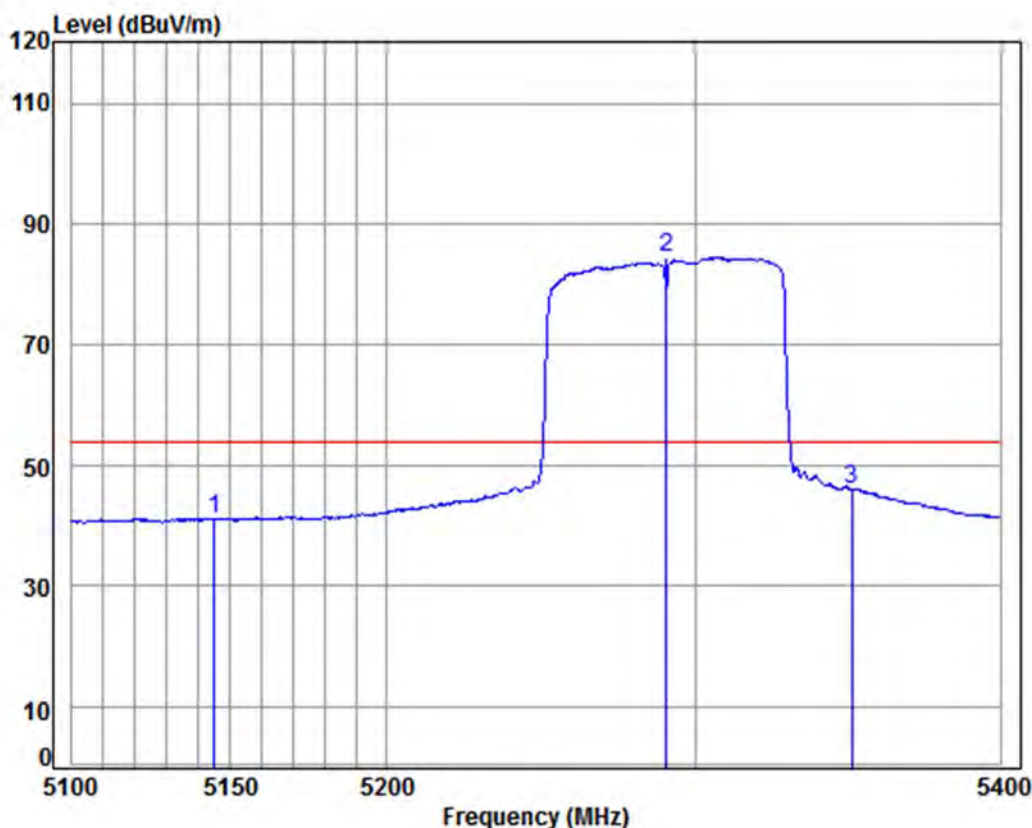

Condition: 3m VERTICAL

Job No : 09260RG

Mode : 5290 Band edge

: 5G WiFi 11AC80

: 12

		Cable	Ant	Preamp	Read	Limit	Over	
	Freq	Loss	Factor	Factor	Level	Line	Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1	5145.090	8.32	34.47	37.39	35.93	41.33	54.00	-12.67 Average
2	pp 5290.000	8.54	34.44	37.49	78.83	84.32	54.00	30.32 Average
3	5350.840	8.63	34.43	37.52	40.69	46.23	54.00	-7.77 Average




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM170800926003

Page: 399 of 411

Test mode:	802.11ac(HT80)	Frequency(MHz):	5290	Peak	Horizontal
------------	----------------	-----------------	------	------	------------

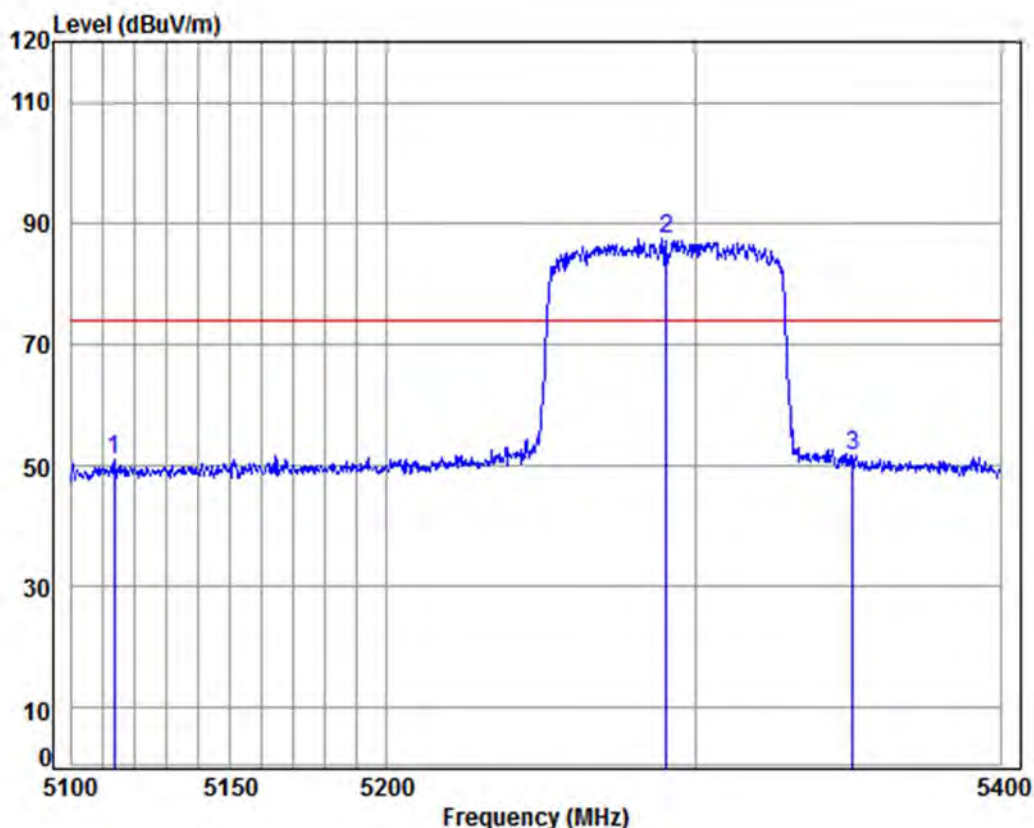

Condition: 3m HORIZONTAL
Job No : 09260RG
Mode : 5290 Band edge
: 5G WiFi 11AC80
: 12

		Cable	Ant	Preamp	Read	Limit	Over	
	Freq	Loss	Factor	Factor	Level	Line	Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1	5113.427	8.27	34.48	37.37	45.60	50.98	74.00	-23.02 peak
2	pp 5290.000	8.54	34.44	37.49	81.81	87.30	74.00	13.30 peak
3	5351.146	8.63	34.43	37.52	46.28	51.82	74.00	-22.18 peak




SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch

Report No.: SZEM170800926003

Page: 400 of 411

Test mode:	802.11ac(HT80)	Frequency(MHz):	5290	Average	Horizontal
------------	----------------	-----------------	------	---------	------------

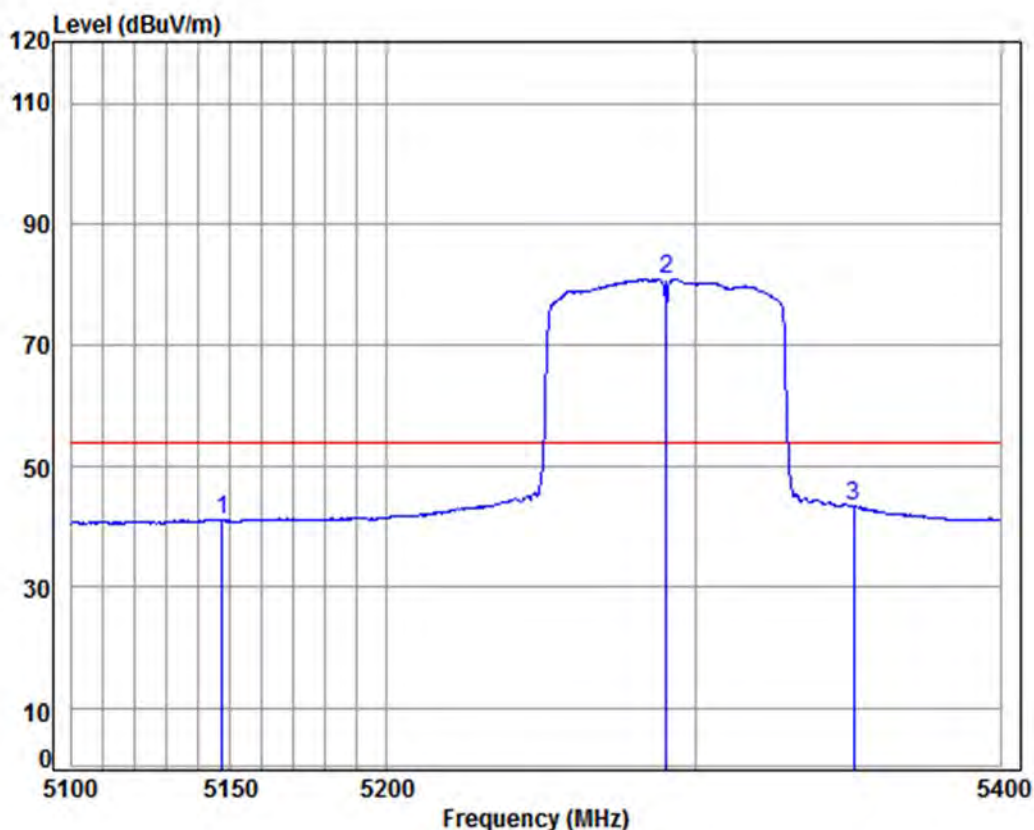

Condition: 3m HORIZONTAL
Job No : 09260RG
Mode : 5290 Band edge
: 5G WiFi 11AC80
: 12

	Freq	Cable Loss	Ant Factor	Preamplifier Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	5147.443	8.32	34.47	37.40	35.90	41.29	54.00	-12.71	Average
2 pp	5290.000	8.54	34.44	37.49	75.28	80.77	54.00	26.77	Average
3	5351.452	8.63	34.43	37.52	38.00	43.54	54.00	-10.46	Average




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM170800926003

Page: 401 of 411

Test mode:	802.11ac(HT80)	Frequency(MHz):	5530	Peak	Vertical
------------	----------------	-----------------	------	------	----------

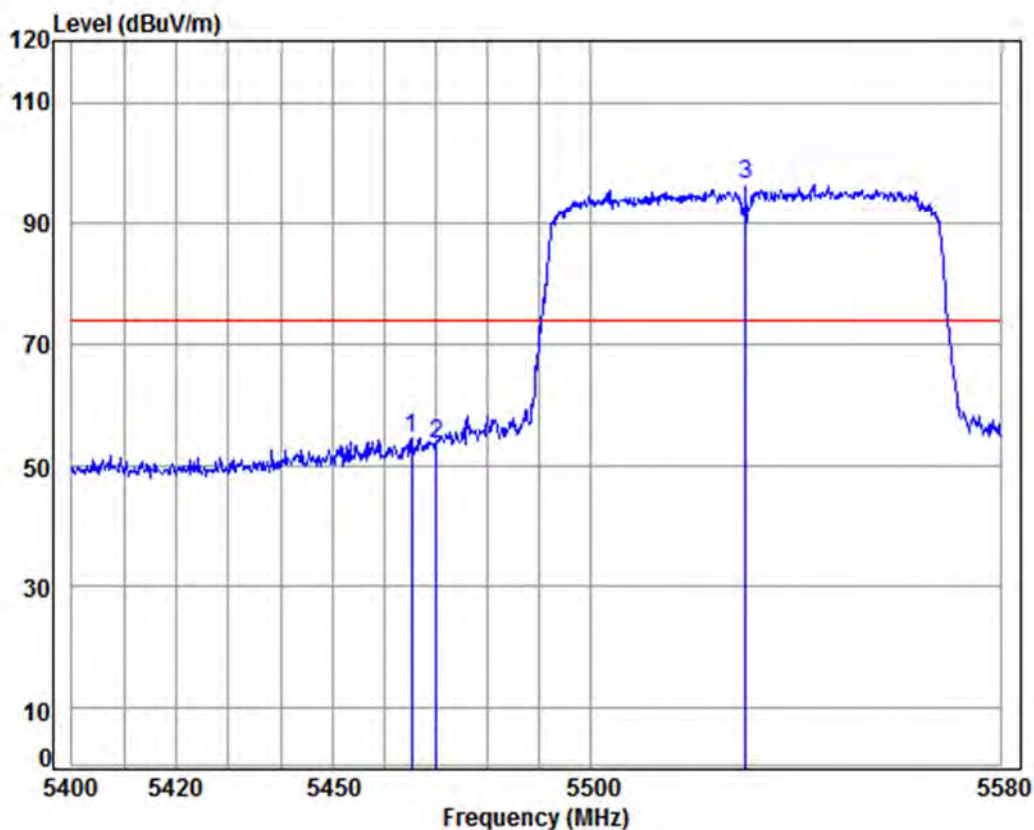

Condition: 3m VERTICAL
Job No : 09260RG
Mode : 5530 Band edge
: 5G WiFi 11AC80
: 12

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	5465.196	8.80	34.41	37.59	48.90	54.52	74.00	-19.48	Peak
2	5470.037	8.81	34.41	37.60	47.98	53.60	74.00	-20.40	Peak
3 pp	5530.000	8.96	34.42	37.63	90.84	96.59	74.00	22.59	Peak




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM170800926003

Page: 402 of 411

Test mode:	802.11ac(HT80)	Frequency(MHz):	5530	Average	Vertical
------------	----------------	-----------------	------	---------	----------

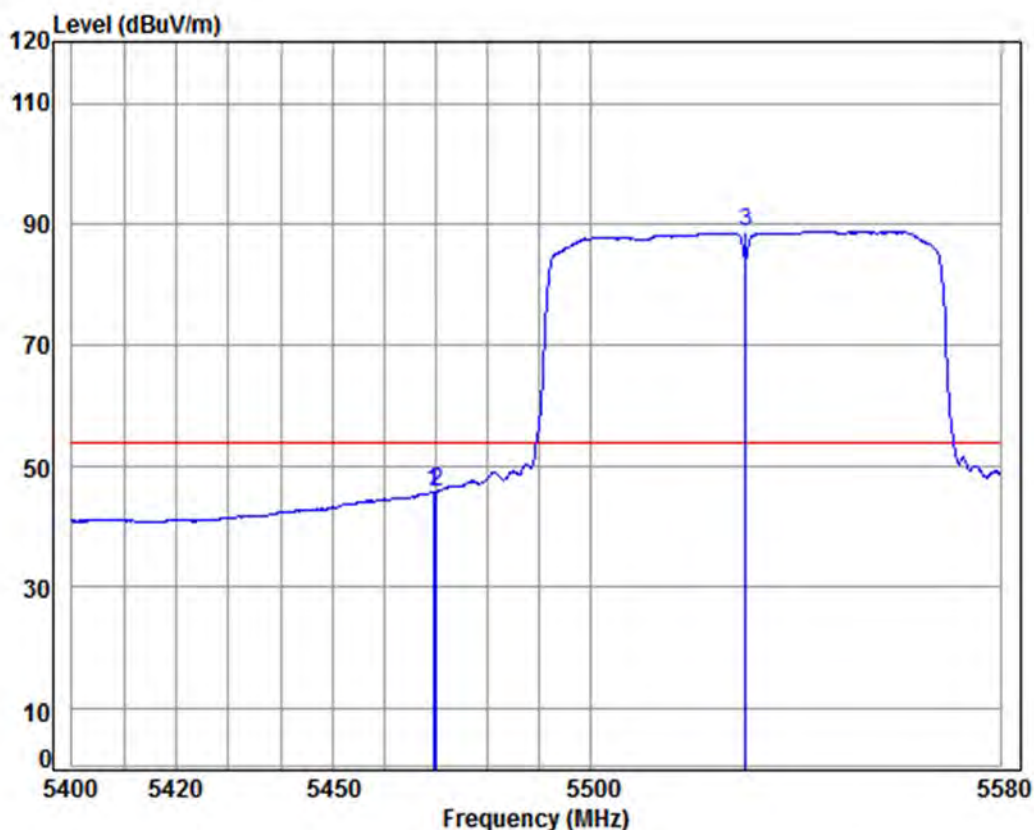

Condition: 3m VERTICAL
Job No : 09260RG
Mode : 5530 Band edge
: 5G WiFi 11AC80
: 12

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Limit Level	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1	5469.319	8.81	34.41	37.60	40.15	45.77	54.00	-8.23 Average
2 pk	5470.037	8.81	34.41	37.60	40.30	45.92	54.00	-8.08 Peak
3 pp	5530.000	8.96	34.42	37.63	82.90	88.65	54.00	34.65 Average




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM170800926003

Page: 403 of 411

Test mode:	802.11ac(HT80)	Frequency(MHz):	5530	Peak	Horizontal
------------	----------------	-----------------	------	------	------------

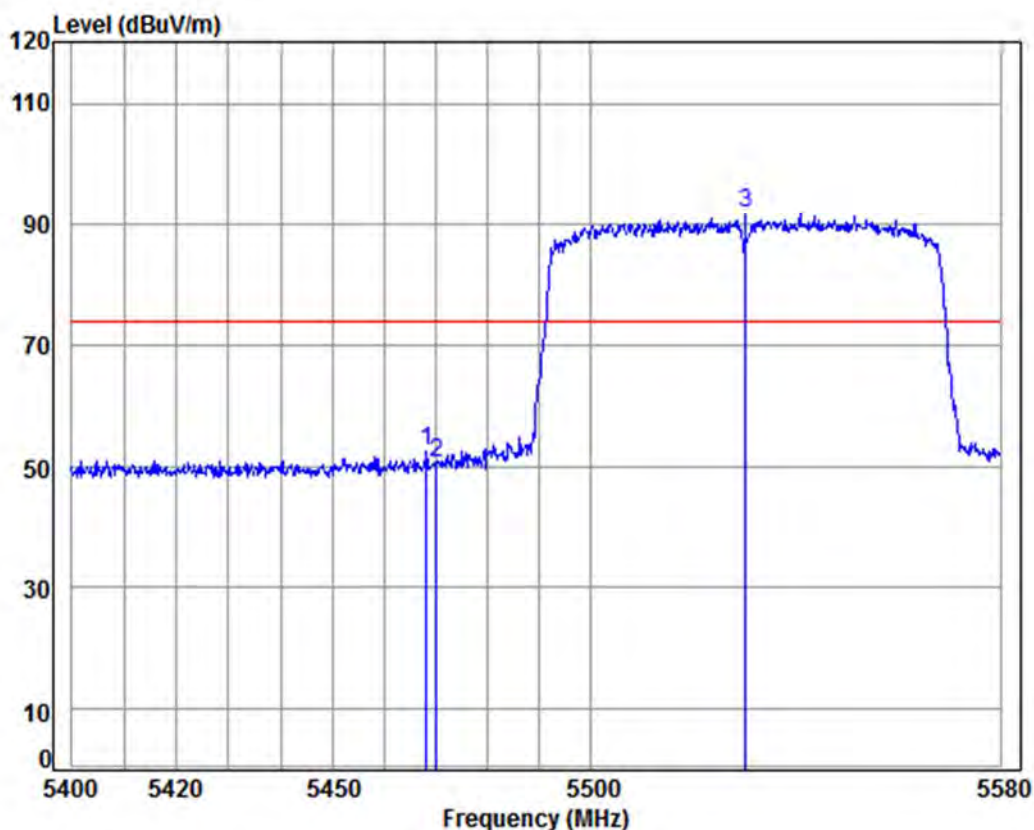

Condition: 3m HORIZONTAL
Job No : 09260RG
Mode : 5530 Band edge
: 5G WiFi 11AC80
: 12

	Freq	Cable Loss	Ant Factor	Preamplifier Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	5468.064	8.80	34.41	37.59	46.88	52.50	74.00	-21.50	peak
2	5470.037	8.81	34.41	37.60	44.98	50.60	74.00	-23.40	Peak
3	pp 5530.000	8.96	34.42	37.63	86.17	91.92	74.00	17.92	peak




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM170800926003

Page: 404 of 411

Test mode:	802.11ac(HT80)	Frequency(MHz):	5530	Average	Horizontal
------------	----------------	-----------------	------	---------	------------

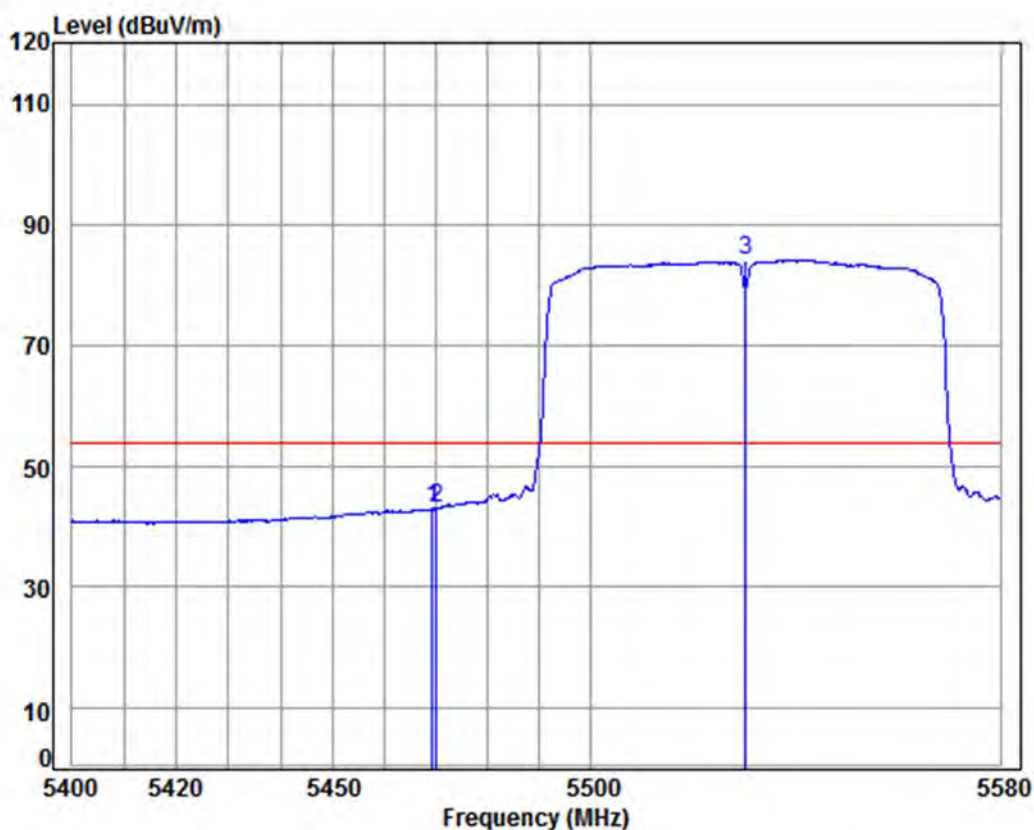

Condition: 3m HORIZONTAL

Job No : 09260RG

Mode : 5530 Band edge

: 5G WiFi 11AC80

: 12

		Cable	Ant	Preamp	Read	Limit	Over	
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1	5469.140	8.81	34.41	37.60	37.47	43.09	54.00	-10.91 Average
2	5470.037	8.81	34.41	37.60	37.54	43.16	54.00	-10.84 Average
3 pp	5530.000	8.96	34.42	37.63	78.36	84.11	54.00	30.11 Average




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM170800926003

Page: 405 of 411

Test mode:	802.11ac(HT80)	Frequency(MHz):	5610	Peak	Vertical
------------	----------------	-----------------	------	------	----------

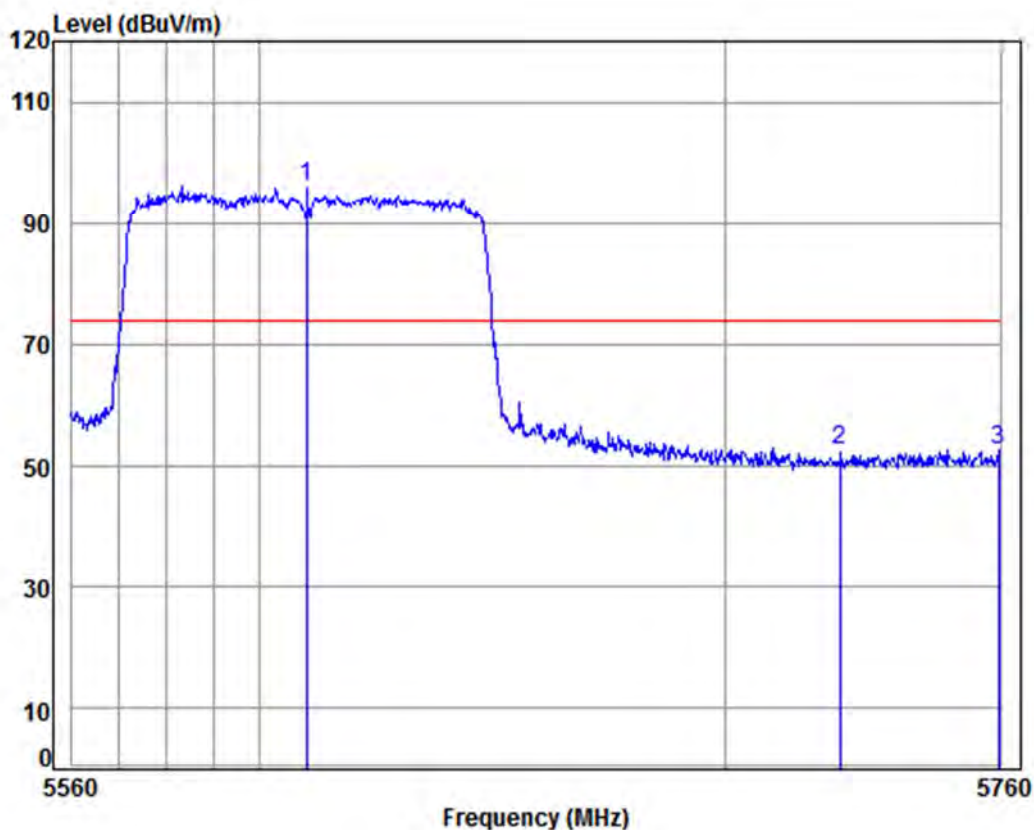

Condition: 3m VERTICAL
Job No : 09260RG
Mode : 5610 Band edge
: 5G WiFi 11AC80
: 12

		Cable	Ant	Preamp	Read	Limit	Over	
	Freq	Loss	Factor	Factor	Level	Line	Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1	pp 5610.000	9.24	34.47	37.68	90.04	96.07	74.00	22.07 Peak
2	5725.000	9.64	34.54	37.75	46.26	52.69	74.00	-21.31 Peak
3	5759.593	9.76	34.56	37.77	46.14	52.69	74.00	-21.31 Peak




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM170800926003

Page: 406 of 411

Test mode:	802.11ac(HT80)	Frequency(MHz):	5610	Average	Vertical
------------	----------------	-----------------	------	---------	----------

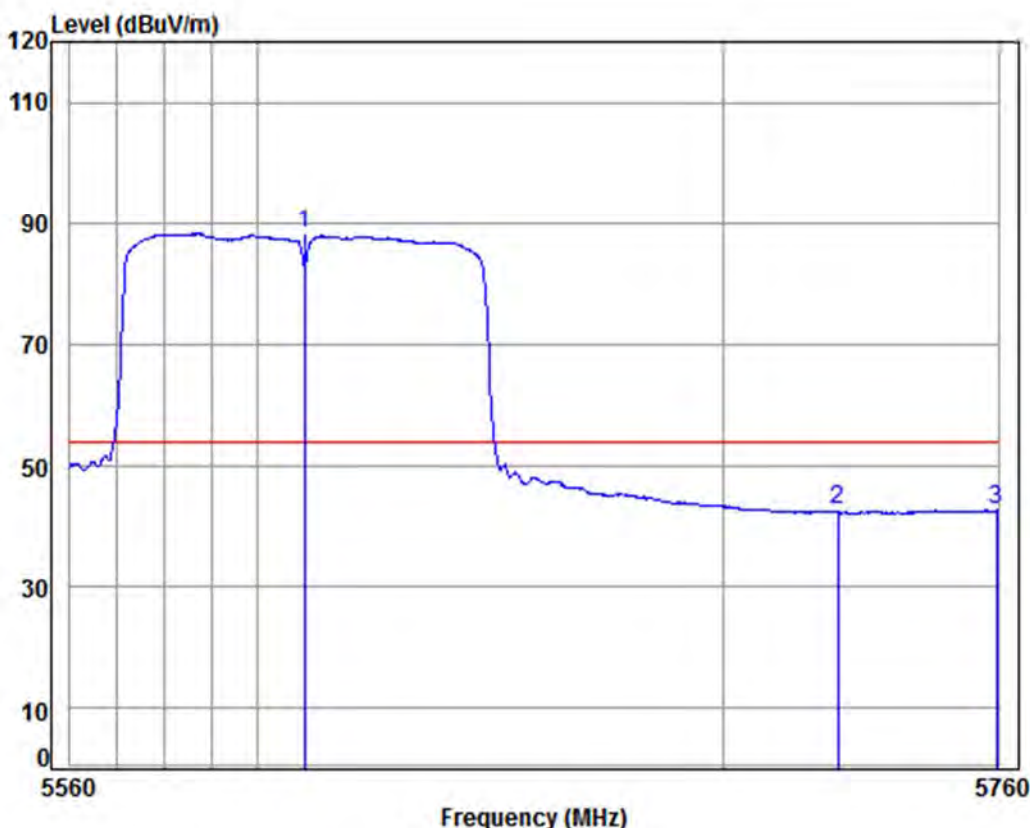

Condition: 3m VERTICAL
Job No : 09260RG
Mode : 5610 Band edge
: 5G WiFi 11AC80
: 12

		Cable	Ant	Preamp	Read	Limit	Over	
	Freq	Loss	Factor	Factor	Level	Line	Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1 pp	5610.000	9.24	34.47	37.68	82.16	88.19	54.00	34.19 Average
2	5725.000	9.64	34.54	37.75	36.33	42.76	54.00	-11.24 Average
3	5759.593	9.76	34.56	37.77	36.21	42.76	54.00	-11.24 Average




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM170800926003

Page: 407 of 411

Test mode:	802.11ac(HT80)	Frequency(MHz):	5610	Peak	Horizontal
------------	----------------	-----------------	------	------	------------

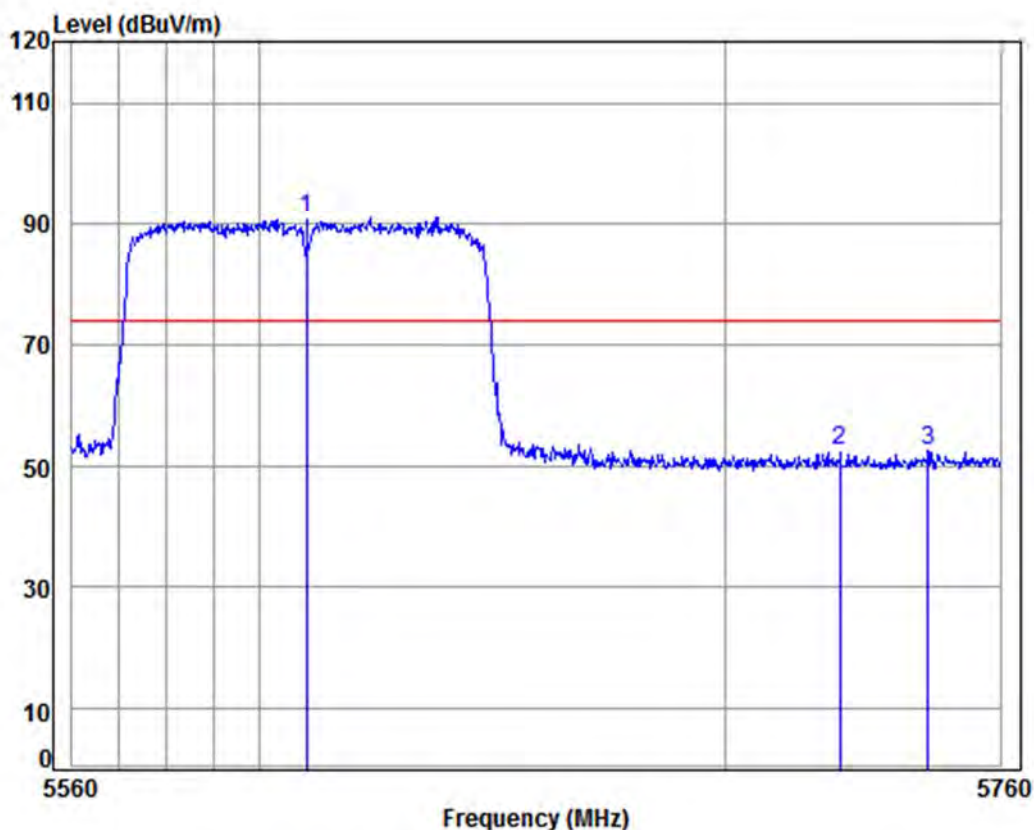

Condition: 3m HORIZONTAL
Job No : 09260RG
Mode : 5610 Band edge
: 5G WiFi 11AC80
: 12

		Cable	Ant	Preamp	Read		Limit	Over	
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1 pp	5610.000	9.24	34.47	37.68	85.02	91.05	74.00	17.05	peak
2	5725.000	9.64	34.54	37.75	46.13	52.56	74.00	-21.44	peak
3	5744.145	9.71	34.55	37.76	46.06	52.56	74.00	-21.44	peak




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM170800926003

Page: 408 of 411

Test mode:	802.11ac(HT80)	Frequency(MHz):	5610	Average	Horizontal
------------	----------------	-----------------	------	---------	------------

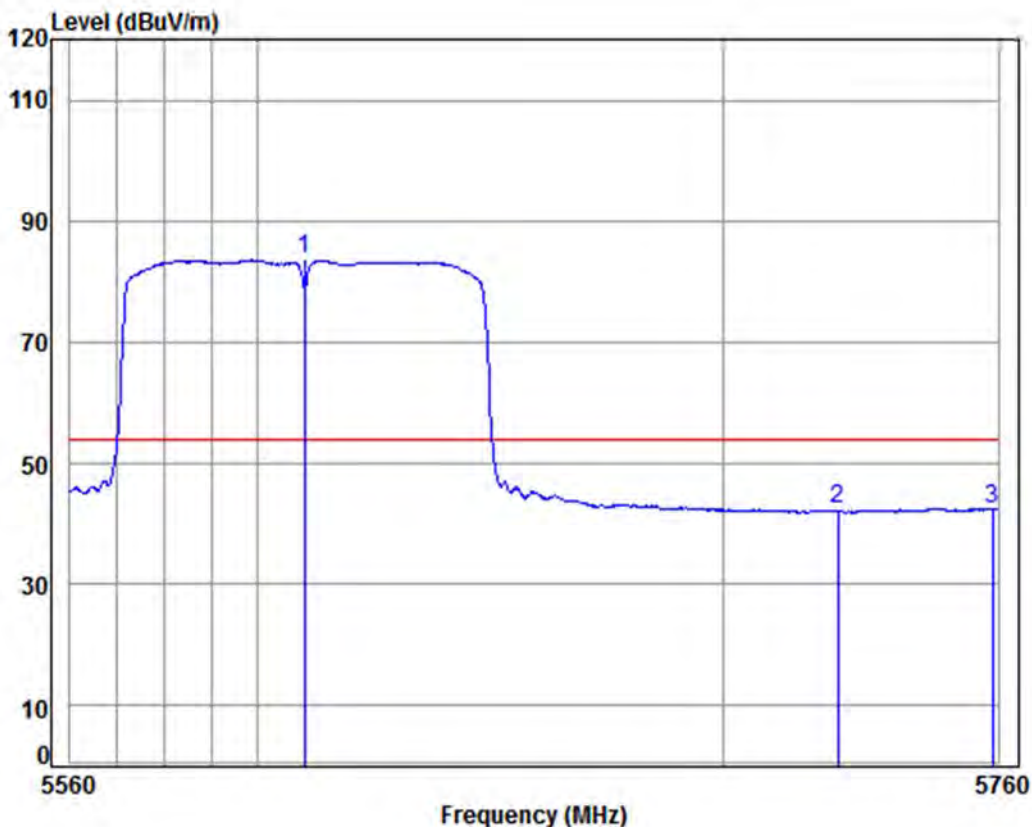

Condition: 3m HORIZONTAL
Job No : 09260RG
Mode : 5610 Band edge
: 5G WiFi 11AC80
: 12

		Cable	Ant	Preamp	Read		Limit	Over	
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1 pp	5610.000	9.24	34.47	37.68	77.52	83.55	54.00	29.55	Average
2	5725.000	9.64	34.54	37.75	36.09	42.52	54.00	-11.48	Average
3	5758.779	9.76	34.56	37.76	35.96	42.52	54.00	-11.48	Average




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM170800926003

Page: 409 of 411

Test mode:	802.11ac(HT80)	Frequency(MHz):	5775	Peak	Vertical
------------	----------------	-----------------	------	------	----------

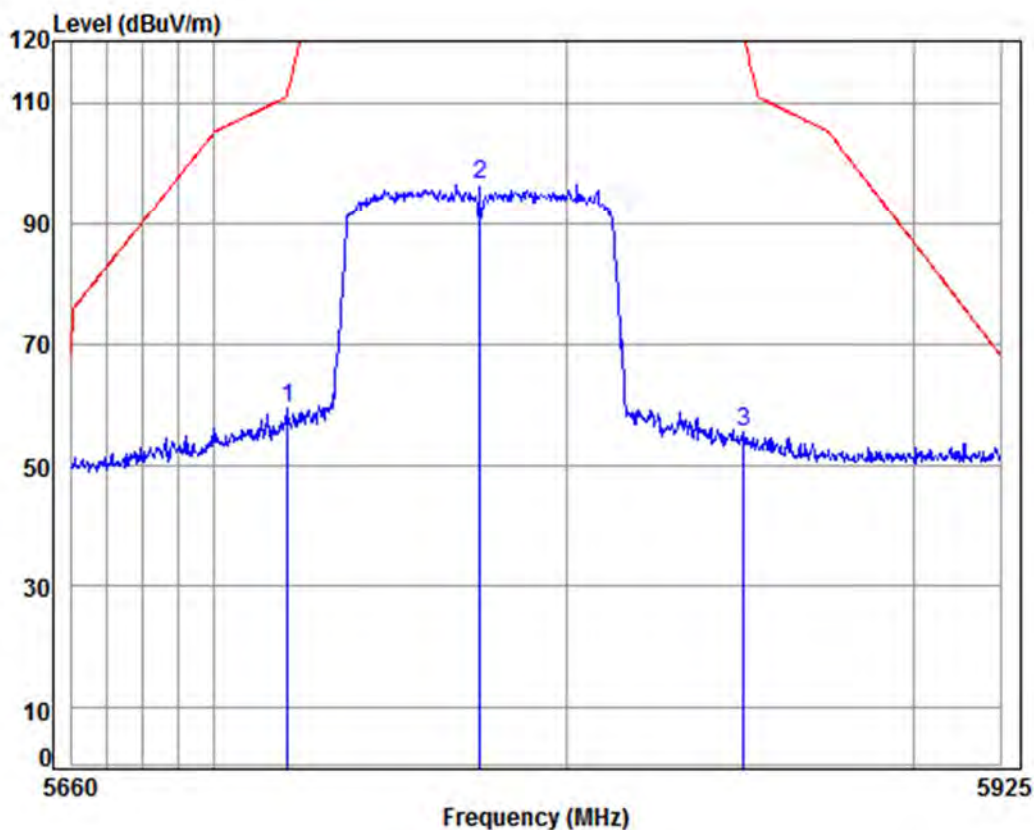

Condition: 3m VERTICAL

Job No : 09260RG

Mode : 5775 Band edge

: 5G WiFi 11AC80

		Cable	Ant	Preamp	Read		Limit	Over	
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	5720.666	9.63	34.54	37.74	53.05	59.48	112.32	-52.84	peak
2	pp 5775.000	9.81	34.57	37.77	89.82	96.43	125.20	-28.77	peak
3	5850.645	10.07	34.61	37.82	48.66	55.52	120.73	-65.21	peak




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM170800926003

Page: 410 of 411

Test mode:	802.11ac(HT80)	Frequency(MHz):	5775	Peak	Horizontal
------------	----------------	-----------------	------	------	------------

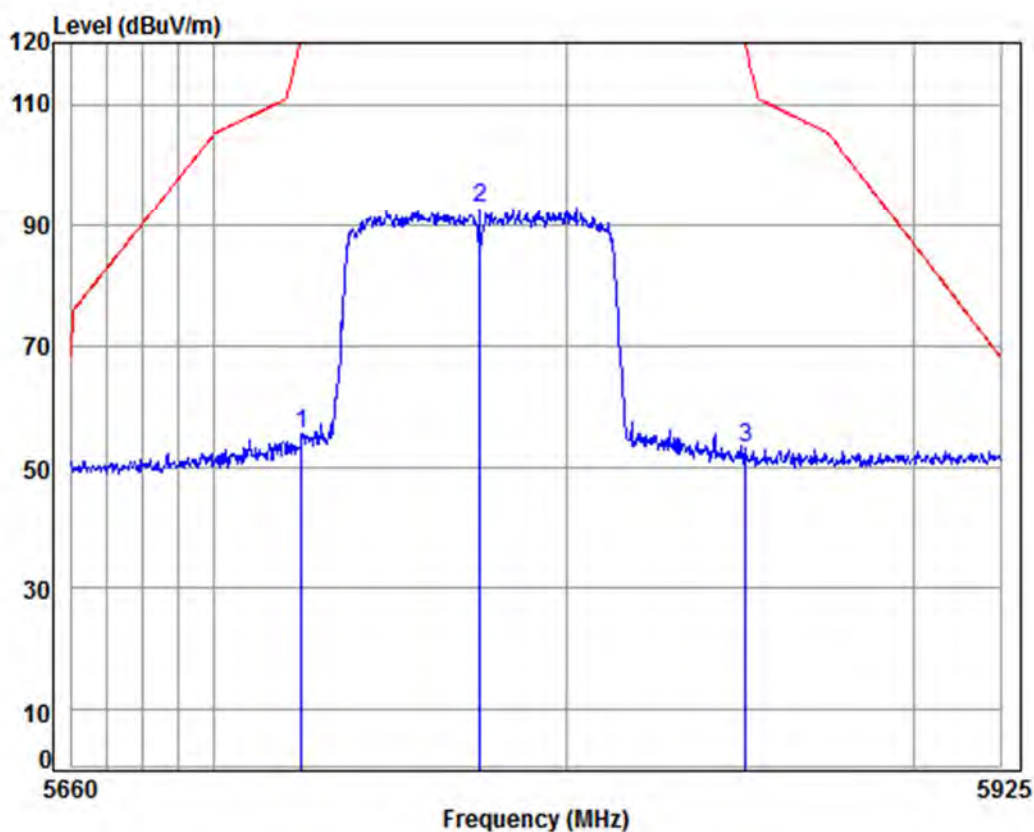

Condition: 3m HORIZONTAL

Job No : 09260RG

Mode : 5775 Band edge

: 5G WiFi 11AC80

		Cable	Ant	Preamp	Read	Limit	Over	
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1	5724.594	9.64	34.54	37.75	49.03	55.46	121.27	-65.81 peak
2	pp 5775.000	9.81	34.57	37.77	86.13	92.74	125.20	-32.46 peak
3	5851.180	10.07	34.61	37.82	46.43	53.29	119.51	-66.22 peak



Note:

The field strength is calculated by adding the Antenna Factor, Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows:

Final Test Level = Receiver Reading + Antenna Factor + Cable Factor – Preamplifier Factor

7 Photographs - EUT Test Setup Details

Refer to Appendix A - Photographs of EUT Test Setup Details for SZEM1708009260RG.