



**SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch**

No. 1 Workshop, M-10, Middle section, Science & Technology Park,
Shenzhen, Guangdong, China 518057

Telephone: +86 (0) 755 2601 2053
Fax: +86 (0) 755 2671 0594
Email: ee.shenzhen@sgs.com

Report No.: SZEM160700551903
Page: 1 of 67

TEST REPORT

Application No.: SZEM1607005519RG
Applicant: Huawei Technologies Co., Ltd.
Address of Applicant: Administration Building, Headquarters of Huawei Technologies Co., Ltd.,
Bantian, Longgang District, Shenzhen, 518129, P.R.C
Manufacturer: Huawei Technologies Co., Ltd.
Address of Manufacturer: Administration Building, Headquarters of Huawei Technologies Co., Ltd.,
Bantian, Longgang District, Shenzhen, 518129, P.R.C
Factory: Huawei Technologies Co., Ltd.
Address of Factory: Administration Building, Headquarters of Huawei Technologies Co., Ltd.,
Bantian, Longgang District, Shenzhen, 518129, P.R.C
Equipment Under Test (EUT):
EUT Name: HUAWEI MediaPad T2 8 Pro
Model No.: JDN-W09
Trade Mark: HUAWEI
FCC ID: QISJDN-W09
Standards: 47 CFR PART 15, Subpart B:2015
Date of Receipt: 2016-07-13
Date of Test: 2016-07-27 to 2016-07-28
Date of Issue: 2016-07-29

Test Result :	Pass*
----------------------	--------------

* In the configuration tested, the EUT complied with the standards specified above.



Jack Zhang
EMC Laboratory Manager

The manufacturer should ensure that all products in series production are in conformity with the product sample detailed in this report. If the product in this report is used in any configuration other than that detailed in the report, the manufacturer must ensure the new system complies with all relevant standards. Any mention of SGS International Electrical Approvals or testing done by SGS International Electrical Approvals in connection with, distribution or use of the product described in this report must be approved by SGS International Electrical Approvals in writing.

The report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the federal government. All test results in this report can be traceable to National or International Standards.

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only



2 Test Summary

Item	Standard	Method	Class	Result
Conducted Disturbance at Mains Terminals (150kHz-30MHz)	47 CFR PART 15,Subpart B:2015	ANSI C63.4	Class B	Pass
Radiated Disturbance (30MHz-1GHz)	47 CFR PART 15,Subpart B:2015	ANSI C63.4	Class B	Pass
Radiated Disturbance (above 1GHz)	47 CFR PART 15,Subpart B:2015	ANSI C63.4	Class B	Pass



3 Contents

	Page
1 COVER PAGE	1
2 TEST SUMMARY	2
3 CONTENTS	3
4 GENERAL INFORMATION.....	4
4.1 DETAILS OF E.U.T.	4
4.2 DESCRIPTION OF SUPPORT UNITS.....	4
4.3 STANDARDS APPLICABLE FOR TESTING	6
4.4 TEST LOCATION	7
4.5 TEST FACILITY	7
4.6 DEVIATION FROM STANDARDS.....	7
4.7 ABNORMALITIES FROM STANDARD CONDITIONS	7
5 EQUIPMENT LIST.....	8
6 EMISSION TEST RESULTS.....	10
6.1 CONDUCTED DISTURBANCE AT MAINS TERMINALS(150kHz-30MHz).....	10
6.1.1 E.U.T. Operation.....	10
6.1.2 Test Setup.....	10
6.1.3 Measurement Data.....	10
6.2 RADIATED DISTURBANCE(30MHz-1GHz)	29
6.2.1 E.U.T. Operation.....	29
6.2.2 Measurement Data.....	29
6.3 RADIATED DISTURBANCE(ABOVE 1GHz)	48
6.3.1 E.U.T. Operation.....	48
6.3.2 Measurement Data.....	48
7 PHOTOGRAPHS - EUT TEST SETUP	67

4 General Information

4.1 Details of E.U.T.

Battery:	Lithium-ion battery:3.8V 4650mAh (charge by USB)		
Power supply	Adaptor:		
	B78004G3203630	input: 100-240V~ 50-60Hz,0.2A	output: DC 5V1A
	H780K1G3X00570	input: 100-240V~ 50-60Hz,0.2A	output: DC 5V1A
	P78015G3W10751	input: 100-240V~ 50-60Hz,0.2A	output: DC 5V1A
Internal Source	1.5GHz		
Cable	USB Cable: 100cm shield		
	Earphone: 110cm unshield		

4.2 Description of Support Units

Description	Manufacturer	Model No.	Serial No.
Blank card (supplied by SGS)	N/A	N/A	REF. No.:SEA3000
WIDEBAND RADIO COMMUNICATION TESTER	Rohde & Schwarz	CMW500	N/A
TF card	SanDisk	Ultra 16GB	REF. No.:SEA0400
GPS Generator	AEROFLEX	G101-2	N/A
Laptop	Lenovo	T430u	REF. No.SEA1800
Laptop	ASUS	A556U	FBN0CV921312487

Support units of Huawei supply:

Name	Manufacture	Serials number	Description
Adapter	HUIZHOU BYD ELECTRONIC CO.,LTD	/	Model:HW-050100U01 (B78004G3203630) Input voltage: 100V~240V AC and 50/60 Hz,0.2A Output voltage: +5V --- 1A
Adapter	DONGGUAN PHITEK ELECTRONICS CO.,LTD	/	Model:HW-050100U01 (P78015G3W10751) Input voltage: 100V~240V AC and 50/60 Hz,0.2A Output voltage: +5V --- 1A
Adapter	SHENZHEN HUNTKEY ELECTRIC CO.,LTD	/	Model:HW-050100U01 (H780K1G3X00570) Input voltage: 100V~240V AC and 50/60 Hz,0.2A Output voltage: +5V --- 1A
Li-ion Battery	SCUD (FUJIAN) Electronics Co., Ltd	/	Battery Model: HB3080G1EBW Rated capacity: 4650 mAh Nominal Voltage: --- +3.8V Charging Voltage: --- +4.35V



SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM160700551903

Page: 5 of 67

Li-ion Battery	Harbin Coslight Power Co., Ltd.	/	Battery Model: HB3080G1EBC Rated capacity: 4650 mAh Nominal Voltage: --- +3.8V Charging Voltage: --- +4.35V
----------------	------------------------------------	---	---



4.3 Standards Applicable for Testing

Table 1 : Tests Carried Out Under 47 CFR PART 15,Subpart B:2015

Method	Item	Status
ANSI C63.4	Conducted Disturbance at Mains Terminals (150kHz-30MHz)	√
ANSI C63.4	Radiated Disturbance(30MHz-1GHz)	√
ANSI C63.4	Radiated Disturbance(above 1GHz)	√

× Indicates that the test is not applicable
√ Indicates that the test is applicable



4.4 Test Location

All tests were performed at:

SGS-CSTC Standards Technical Services Co., Ltd., Shenzhen Branch

No. 1 Workshop, M-10, Middle section, Science & Technology Park, Shenzhen, Guangdong,

China 518057

Tel: +86 755 2601 2053 Fax: +86 755 2671 0594

No tests were sub-contracted.

4.5 Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

•CNAS (No. CNAS L2929)

CNAS has accredited SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch EMC Lab to ISO/IEC 17025:2005 General Requirements for the Competence of Testing and Calibration Laboratories (CNAS-CL01 Accreditation Criteria for the Competence of Testing and Calibration Laboratories) for the competence in the field of testing.

• A2LA (Certificate No. 3816.01)

SGS-CSTC Standards Technical Services Co., Ltd., Shenzhen EMC Laboratory is accredited by the American Association for Laboratory Accreditation(A2LA). Certificate No. 3816.01.

• VCCI

The 10m Semi-anechoic chamber and Shielded Room of SGS-CSTC Standards Technical Services Co., Ltd. have been registered in accordance with the Regulations for Voluntary Control Measures with Registration No.: G-823, R-4188, T-1153 and C-2383 respectively.

• FCC – Registration No.: 556682

SGS-CSTC Standards Technical Services Co., Ltd., Shenzhen EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files. Registration No.: 556682.

• Industry Canada (IC)

Two 3m Semi-anechoic chambers and the 10m Semi-anechoic chamber of SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch EMC Lab have been registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing with Registration No.: 4620C-1, 4620C-2, 4620C-3.

4.6 Deviation from Standards

None

4.7 Abnormalities from Standard Conditions

None



5 Equipment List

Conducted Disturbance at Mains Terminals(150kHz-30MHz)						
Item	Equipment	Manufacturer	Model No	Inventory No	Cal Date	Cal Due Date
1	Shielding Room	ChangZhou ZhongYu	GB-88	SEM001-06	2016-05-13	2017-05-13
2	LISN	Rohde & Schwarz	ENV216	SEM007-01	2015-10-09	2016-10-09
3	LISN	ETS-LINDGREN	3816/2	SEM007-02	2016-04-25	2017-04-25
4	EMI Test Receiver	Rohde & Schwarz	ESCI	SEM004-02	2016-04-25	2017-04-25

Radiated Disturbance(30MHz-1GHz)						
Item	Equipment	Manufacturer	Model No	Inventory No	Cal Date	Cal Due Date
1	10m Semi- Anechoic Chamber	SAEMC	FSAC1018	SEM001-03	2016-05-13	2017-05-13
2	EMI Test Receiver (9k-3GHz)	Rohde & Schwarz	ESCI	SEM004-01	2016-04-25	2017-04-25
3	Trilog-Broadband Antenna (30M-1GHz)	Schwarzbeck	VULB9168	SEM003-17	2016-01-26	2017-01-26
4	Pre-amplifier	Sonoma Instrument Co	310N	SEM005-03	2016-04-25	2017-04-25

Radiated Disturbance(above 1GHz)						
Item	Equipment	Manufacturer	Model No	Inventory No	Cal Date	Cal Due Date
1	3m Semi- Anechoic Chamber	AUDIX	N/A	SEM001-02	2016-05-13	2017-05-13
2	EMI Test Receiver	Rohde & Schwarz	ESIB26	SEM004-04	2016-04-25	2017-04-25
3	Horn Antenna (1-18GHz)	Rohde & Schwarz	HF907	SEM003-06	2015-06-14	2018-06-14
4	Low Noise Amplifier	Black Diamond Series	BDLNA-0118- 352810	SEM005-05	2015-10-09	2016-10-09



General used equipment						
Item	Equipment	Manufacturer	Model No	Inventory No	Cal Date	Cal Due Date
1	Humidity/ Temperature Indicator	Shang Hai Meteorological Industry Factory	ZJ1-2B	SEL0101	2015-10-12	2016-10-12
2	Humidity/ Temperature Indicator	Shang Hai Meteorological Industry Factory	ZJ1-2B	SEL0102	2015-10-12	2016-10-12
3	Humidity/ Temperature Indicator	Shang Hai Meteorological Industry Factory	ZJ1-2B	SEL0103	2015-10-12	2016-10-12
4	Barometer	Chang Chun Meteorological Industry Factory	DYM3	SEL0088	2016-04-25	2017-04-25

6 Emission Test Results


6.1 Conducted Disturbance at Mains Terminals(150kHz-30MHz)

Test Requirement:	47 CFR PART 15,Subpart B:2015
Test Method:	ANSI C63.4
Frequency Range:	150kHz to 30MHz
Limit:	
0.15M-0.5MHz	66dB(μV)-56dB(μV) quasi-peak, 56dB(μV)-46dB(μV) average
0.5M-5MHz	56dB(μV) quasi-peak, 46dB(μV) average
5M-30MHz	60dB(μV) quasi-peak, 50dB(μV) average
Detector:	Peak for pre-scan (9kHz resolution bandwidth) 0.15M to 30MHz

6.1.1 E.U.T. Operation

Operating Environment:						
Temperature:	25.0 °C	Humidity:	55 % RH	Atmospheric Pressure:	1010	mbar
Test mode	a: charge + WiFi idle mode + earphone b: charge + Bluetooth Classic idle mode + earphone c: charge + Bluetooth Low Energy idle mode + earphone d: charge + REC mode (Front Camera)/ (Rear Camera) which is worst. e: charge + Playing mode + earphone f: PC mode.					

6.1.2 Test Setup

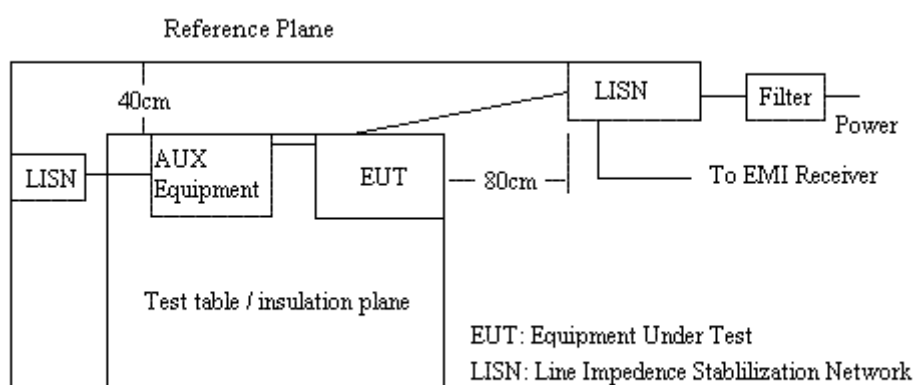


6.1.3 Measurement Data

An initial pre-scan was performed with peak detector. Quasi-Peak or Average measurement were performed at the frequencies with maximized peak emission were detected.




B78004G3203630
Mode:a;Line:Live Line

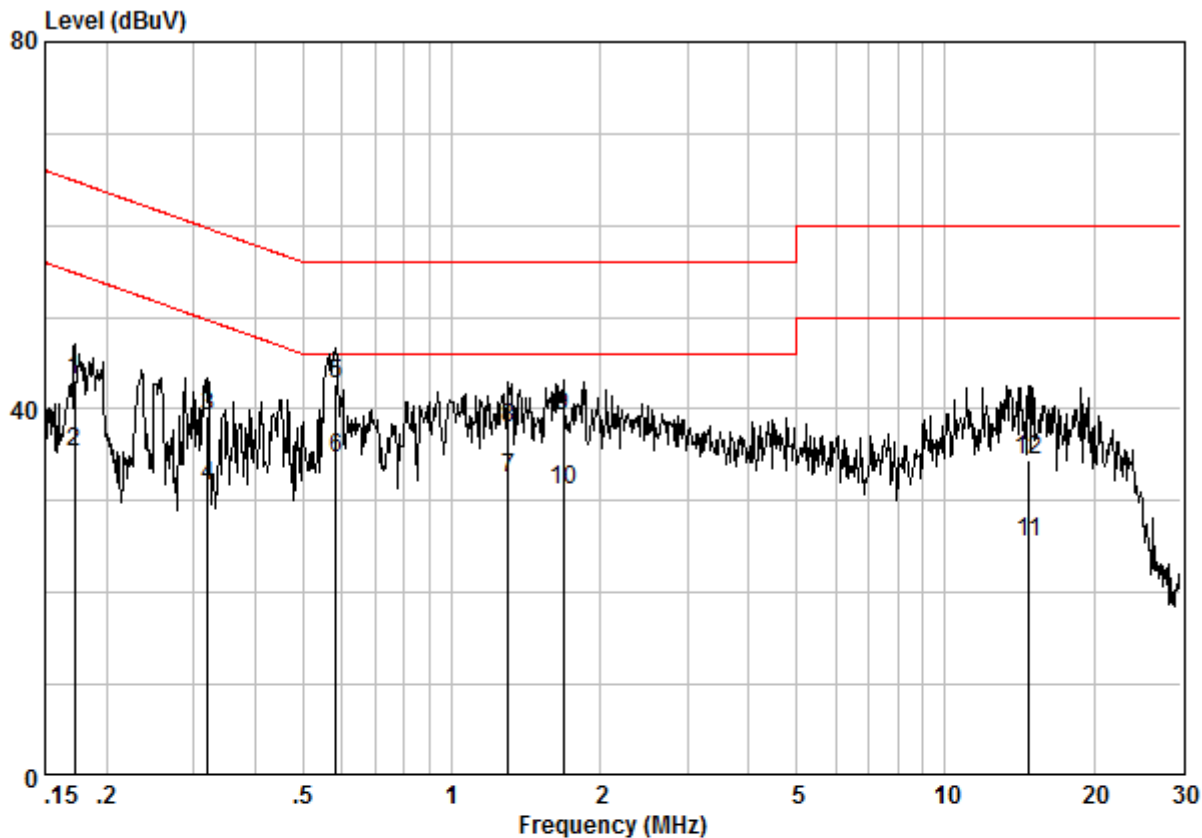

Site : Shielding Room
Condition : CE LINE
Job No. : 5519RG
Test Mode : a
: B78004G3203630

	Freq	Cable Loss	LISN Factor	Read Level	Limit Level	Limit Line	Over Limit	Remark
	MHz	dB	dB	dBuV	dBuV	dBuV	dB	
1	0.17215	0.02	9.60	33.49	43.11	64.86	-21.74	QP
2	0.17215	0.02	9.60	25.69	35.31	54.86	-19.55	Average
3	0.31999	0.02	9.59	29.71	39.32	59.71	-20.39	QP
4	0.31999	0.02	9.59	22.02	31.63	49.71	-18.08	Average
5	0.58231	0.02	9.61	33.02	42.65	56.00	-13.35	QP
6 @	0.58231	0.02	9.61	25.01	34.64	46.00	-11.36	Average
7	1.303	0.03	9.60	22.93	32.56	46.00	-13.44	Average
8	1.303	0.03	9.60	28.35	37.98	56.00	-18.02	QP
9	1.680	0.03	9.60	29.51	39.14	56.00	-16.86	QP
10	1.680	0.03	9.60	21.48	31.11	46.00	-14.89	Average
11	14.750	0.16	9.76	15.68	25.59	50.00	-24.41	Average
12	14.750	0.16	9.76	24.59	34.50	60.00	-25.50	QP


Mode:a;Line:Neutral Line

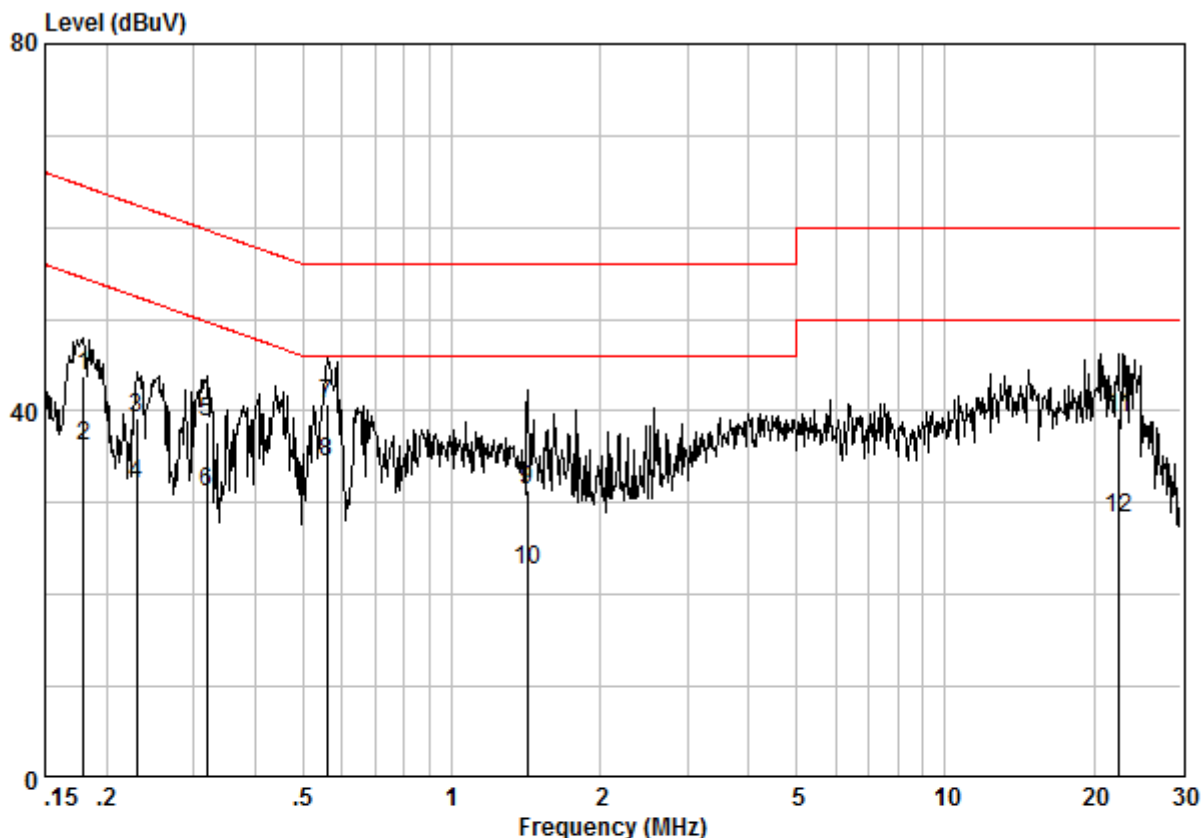

Site : Shielding Room
Condition : CE NEUTRAL
Job No. : 5519RG
Test Mode : a
: B78004G3203630

	Freq	Cable Loss	LISN Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB	dBuV	dBuV	dBuV	dB	
1	0.17961	0.02	9.61	34.25	43.88	64.50	-20.63	QP
2	0.17961	0.02	9.61	26.52	36.15	54.50	-18.36	Average
3	0.23040	0.02	9.61	29.70	39.34	62.44	-23.10	QP
4	0.23040	0.02	9.61	22.51	32.14	52.44	-20.29	Average
5	0.31830	0.02	9.62	29.12	38.76	59.75	-20.99	QP
6	0.31830	0.02	9.62	21.63	31.27	49.75	-18.48	Average
7	0.55814	0.02	9.63	31.13	40.78	56.00	-15.22	QP
8 @	0.55814	0.02	9.63	24.85	34.50	46.00	-11.50	Average
9	1.426	0.03	9.64	21.67	31.34	56.00	-24.66	QP
10	1.426	0.03	9.64	13.03	22.70	46.00	-23.30	Average
11	22.535	0.16	10.06	29.09	39.31	60.00	-20.69	QP
12	22.535	0.16	10.06	18.09	28.32	50.00	-21.68	Average


Mode:b;Line:Live Line

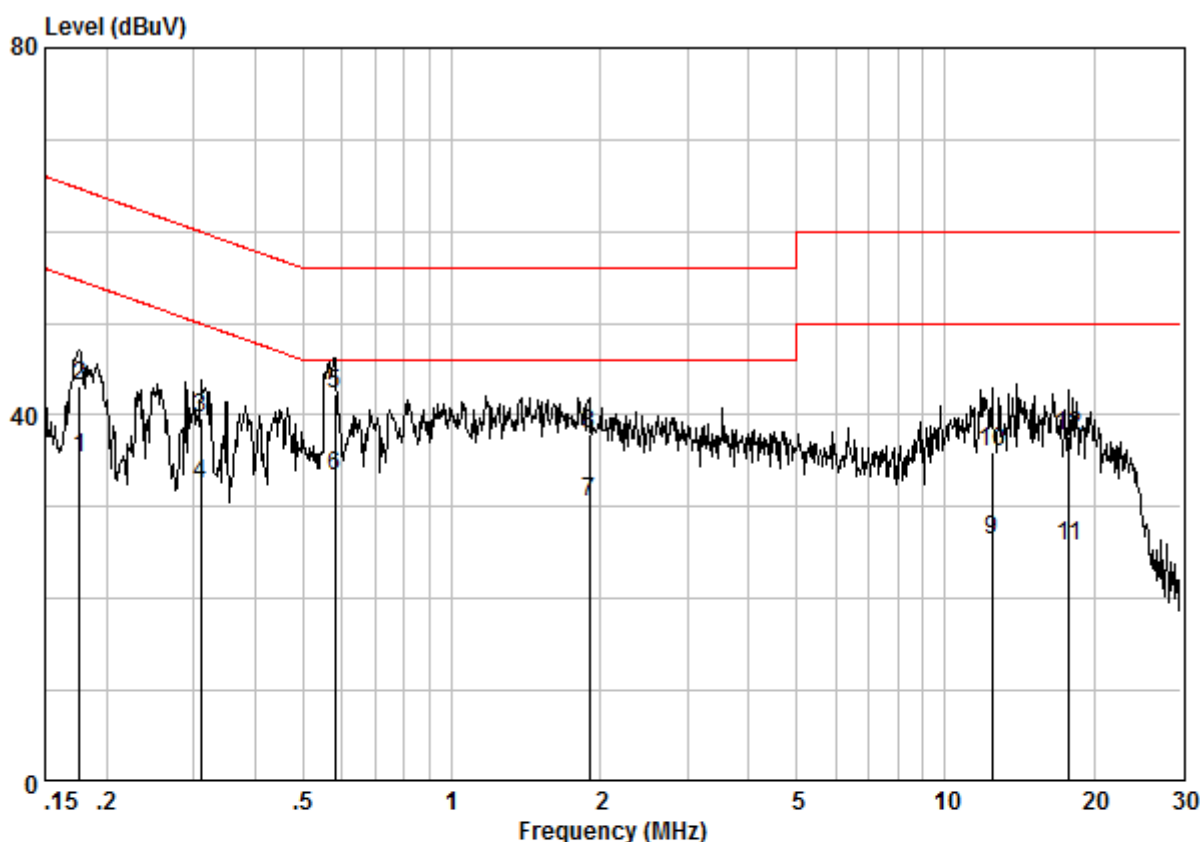

Site : Shielding Room
 Condition : CE LINE
 Job No. : 5519RG
 Test Mode : b
 : B78004G3203630

	Freq	Cable Loss	LISN Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB	dBuV	dBuV	dBuV	dB	
1	0.17584	0.02	9.60	25.64	35.26	54.68	-19.42	Average
2	0.17584	0.02	9.60	33.51	43.13	64.68	-21.55	QP
3	0.30998	0.02	9.59	30.13	39.74	59.97	-20.23	QP
4	0.30998	0.02	9.59	22.89	32.50	49.97	-17.47	Average
5	0.57923	0.02	9.61	32.63	42.25	56.00	-13.75	QP
6	0.57923	0.02	9.61	23.67	33.30	46.00	-12.70	Average
7	1.898	0.03	9.63	20.88	30.54	46.00	-15.46	Average
8	1.898	0.03	9.63	28.25	37.91	56.00	-18.09	QP
9	12.449	0.15	9.74	16.49	26.38	50.00	-23.62	Average
10	12.449	0.15	9.74	26.00	35.89	60.00	-24.11	QP
11	17.849	0.17	9.77	15.69	25.63	50.00	-24.37	Average
12	17.849	0.17	9.77	27.72	37.66	60.00	-22.34	QP

Mode:b;Line:Neutral Line

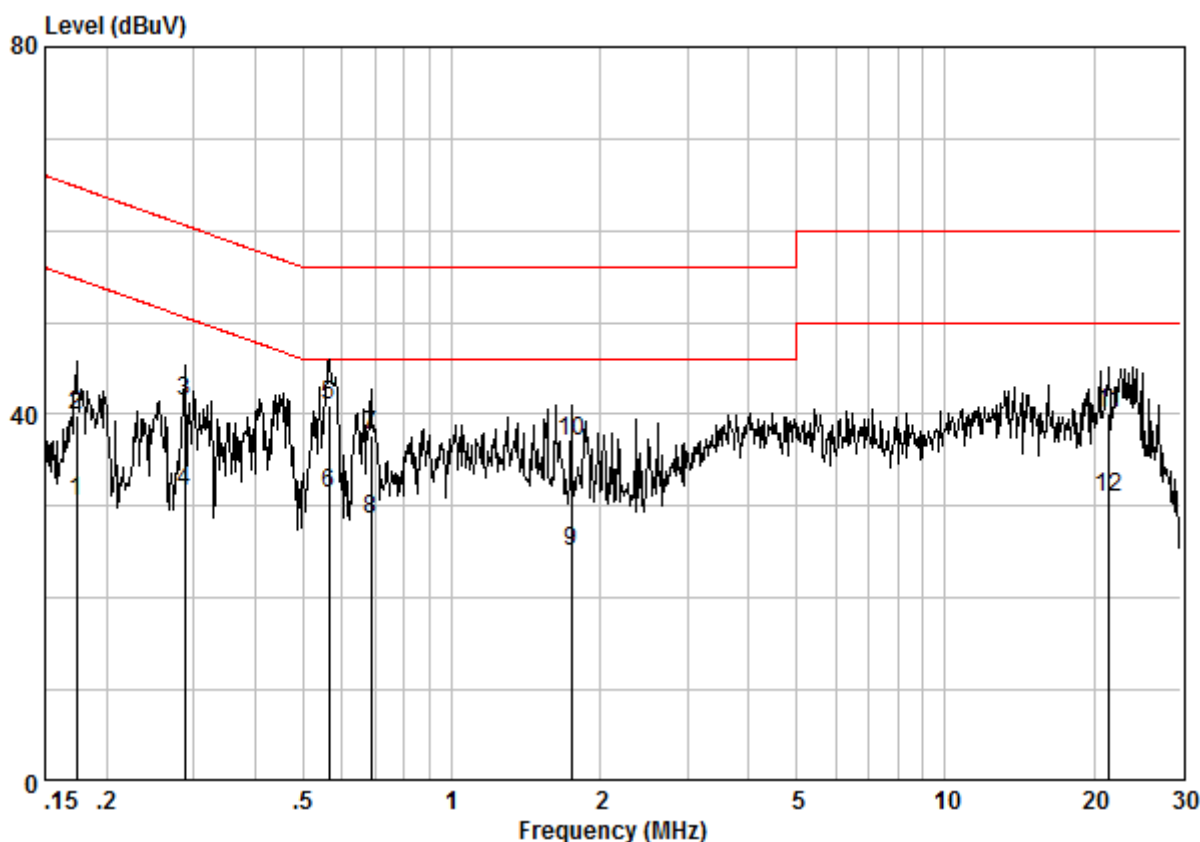


Site : Shielding Room
Condition : CE NEUTRAL
Job No. : 5519RG
Test Mode : b
: B78004G3203630

	Freq	Cable Loss	LISN Factor	Read Level	Limit Level	Limit Line	Over Limit	Remark
	MHz	dB	dB	dBuV	dBuV	dBuV	dB	
1	0.17399	0.02	9.60	20.91	30.53	54.77	-24.23	Average
2	0.17399	0.02	9.60	30.21	39.83	64.77	-24.94	QP
3	0.28782	0.02	9.62	31.69	41.33	60.59	-19.26	QP
4	0.28782	0.02	9.62	21.95	31.59	50.59	-19.00	Average
5	0.56409	0.02	9.63	31.24	40.89	56.00	-15.11	QP
6	0.56409	0.02	9.63	21.71	31.36	46.00	-14.64	Average
7	0.68626	0.02	9.63	28.14	37.80	56.00	-18.20	QP
8	0.68626	0.02	9.63	18.97	28.62	46.00	-17.38	Average
9	1.744	0.03	9.65	15.47	25.15	46.00	-20.85	Average
10	1.744	0.03	9.65	27.30	36.99	56.00	-19.01	QP
11	21.486	0.17	10.03	30.00	40.20	60.00	-19.80	QP
12	21.486	0.17	10.03	20.85	31.05	50.00	-18.95	Average



Mode:c;Line:Live Line

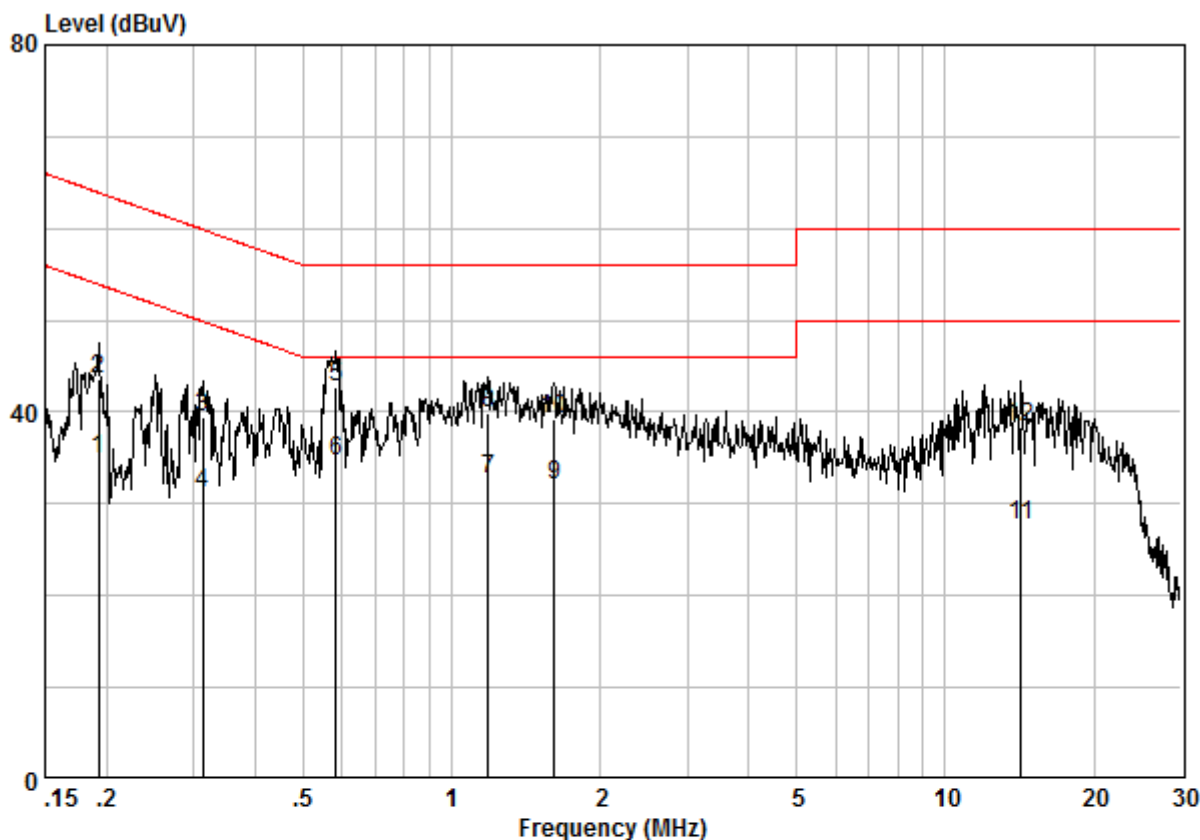


Site : Shielding Room
Condition : CE LINE
Job No. : 5519RG
Test Mode : c
: B78004G3203630

	Freq	Cable Loss	LISN Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB	dBuV	dBuV	dBuV	dB	
1	0.19242	0.02	9.60	25.24	34.86	53.93	-19.07	Average
2	0.19242	0.02	9.60	33.93	43.55	63.93	-20.38	QP
3	0.31328	0.02	9.59	29.76	39.37	59.88	-20.52	QP
4	0.31328	0.02	9.59	21.54	31.15	49.88	-18.73	Average
5	0.58231	0.02	9.61	33.13	42.75	56.00	-13.25	QP
6 @	0.58231	0.02	9.61	25.03	34.66	46.00	-11.34	Average
7	1.184	0.03	9.61	22.98	32.62	46.00	-13.38	Average
8	1.184	0.03	9.61	30.15	39.79	56.00	-16.21	QP
9	1.610	0.03	9.59	22.46	32.08	46.00	-13.92	Average
10	1.610	0.03	9.59	29.59	39.21	56.00	-16.79	QP
11	14.213	0.16	9.75	17.69	27.60	50.00	-22.40	Average
12	14.213	0.16	9.75	28.45	38.36	60.00	-21.64	QP



Mode:c;Line:Neutral Line

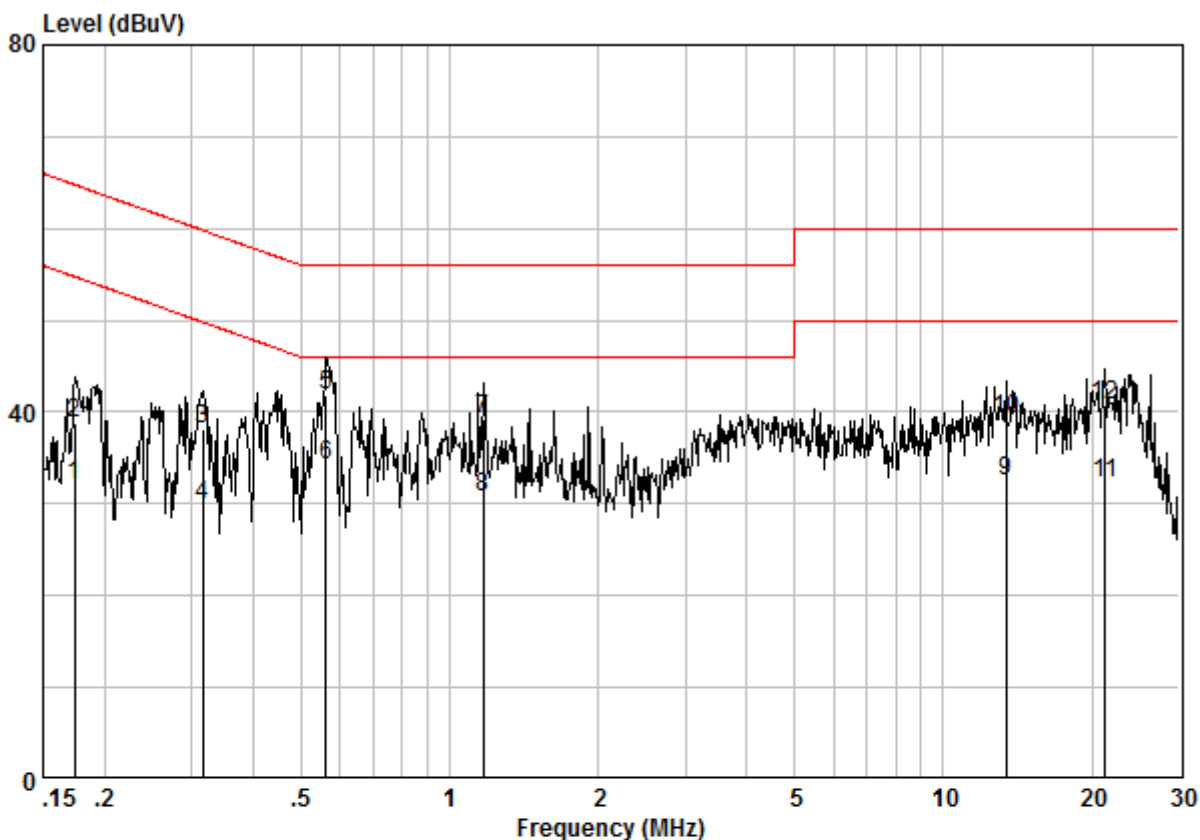


Site : Shielding Room
Condition : CE NEUTRAL
Job No. : 5519RG
Test Mode : c
: B78004G3203630

	Freq	Cable Loss	LISN Factor	Read Level	Limit Line	Over Limit	Remark
	MHz	dB	dB	dBuV	dBuV	dB	
1	0.17399	0.02	9.60	22.36	31.98	54.77	Average
2	0.17399	0.02	9.60	29.19	38.81	64.77	QP
3	0.31662	0.02	9.62	28.58	38.22	59.80	QP
4	0.31662	0.02	9.62	20.16	29.80	49.80	Average
5	0.56111	0.02	9.63	32.25	41.90	56.00	QP
6	0.56111	0.02	9.63	24.58	34.23	46.00	Average
7	1.172	0.03	9.65	29.46	39.14	56.00	QP
8	1.172	0.03	9.65	21.03	30.71	46.00	Average
9	13.408	0.15	9.87	22.36	32.38	50.00	Average
10	13.408	0.15	9.87	29.25	39.27	60.00	QP
11	21.260	0.17	10.03	22.11	32.31	50.00	Average
12	21.260	0.17	10.03	30.48	40.67	60.00	QP




Mode:d;Line:Live Line

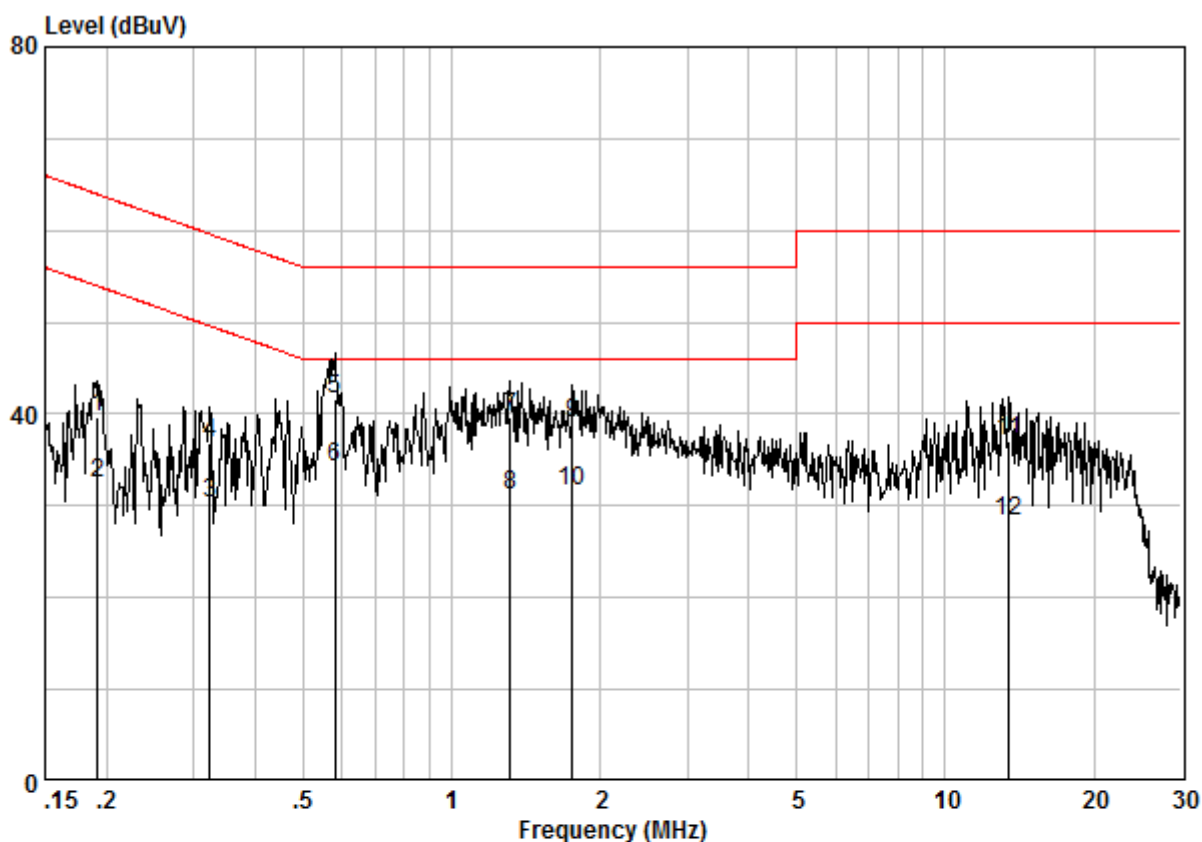

Site : Shielding Room
Condition : CE LINE
Job No. : 5519RG
Test Mode : d
: B78004G3203630

	Freq	Cable Loss	LISN Factor	Read Level	Limit Line	Over Limit	Remark
	MHz	dB	dB	dBuV	dBuV	dB	
1	0.19140	0.02	9.60	30.03	39.65	63.98	-24.33 QP
2	0.19140	0.02	9.60	22.87	32.49	53.98	-21.49 Average
3	0.32340	0.02	9.59	20.63	30.24	49.62	-19.38 Average
4	0.32340	0.02	9.59	27.14	36.75	59.62	-22.87 QP
5	0.57923	0.02	9.61	32.11	41.74	56.00	-14.26 QP
6	0.57923	0.02	9.61	24.58	34.21	46.00	-11.79 Average
7	1.317	0.03	9.60	29.97	39.60	56.00	-16.40 QP
8	1.317	0.03	9.60	21.62	31.25	46.00	-14.75 Average
9	1.753	0.03	9.61	29.45	39.09	56.00	-16.91 QP
10	1.753	0.03	9.61	21.98	31.62	46.00	-14.38 Average
11	13.479	0.15	9.75	27.06	36.96	60.00	-23.04 QP
12	13.479	0.15	9.75	18.54	28.44	50.00	-21.56 Average


Mode:d;Line:Neutral Line

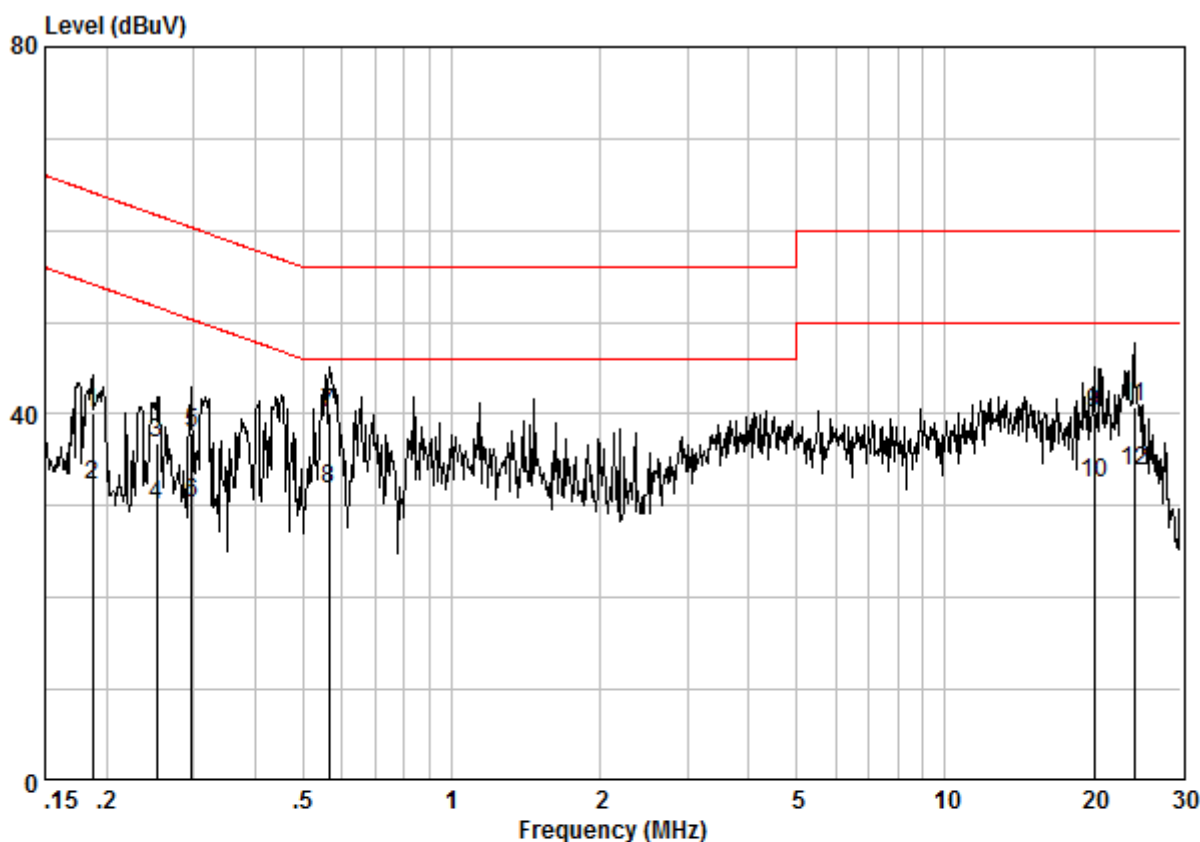

Site : Shielding Room
 Condition : CE NEUTRAL
 Job No. : 5519RG
 Test Mode : d
 : B78004G3203630

	Freq	Cable Loss	LISN Factor	Read Level	Limit Line	Over Limit	Remark
	MHz	dB	dB	dBuV	dBuV	dB	
1	0.18738	0.02	9.61	30.53	40.16	64.15	-23.99 QP
2	0.18738	0.02	9.61	22.54	32.17	54.15	-21.98 Average
3	0.25211	0.02	9.61	27.31	36.95	61.69	-24.74 QP
4	0.25211	0.02	9.61	20.55	30.18	51.69	-21.51 Average
5	0.29711	0.02	9.62	28.39	38.03	60.32	-22.29 QP
6	0.29711	0.02	9.62	20.57	30.21	50.32	-20.11 Average
7	0.56409	0.02	9.63	30.42	40.07	56.00	-15.93 QP
8	0.56409	0.02	9.63	22.14	31.79	46.00	-14.21 Average
9	20.056	0.17	9.99	29.90	40.06	60.00	-19.94 QP
10	20.056	0.17	9.99	22.39	32.55	50.00	-17.45 Average
11	24.142	0.16	10.10	30.58	40.84	60.00	-19.16 QP
12	24.142	0.16	10.10	23.44	33.70	50.00	-16.30 Average

Mode:e;Line:Live Line

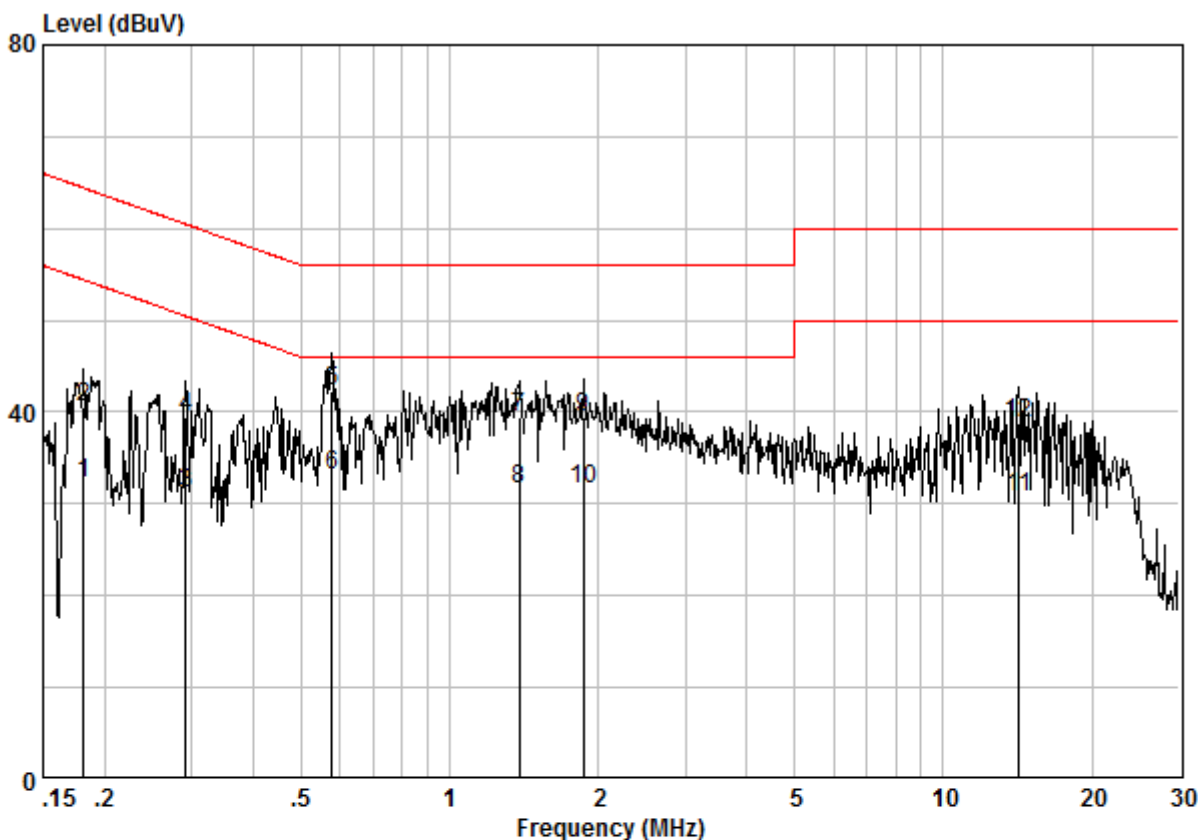


Site : Shielding Room
 Condition : CE LINE
 Job No. : 5519RG
 Test Mode : e
 : B78004G3203630

	Freq	Cable Loss	LISN Factor	Read Level	Limit Line	Over Limit	Remark
	MHz	dB	dB	dBuV	dBuV	dB	
1	0.18152	0.02	9.60	22.56	32.18	54.42	-22.24 Average
2	0.18152	0.02	9.60	30.96	40.58	64.42	-23.83 QP
3	0.29243	0.02	9.59	21.58	31.19	50.46	-19.26 Average
4	0.29243	0.02	9.59	29.85	39.46	60.46	-20.99 QP
5	0.57617	0.02	9.61	32.71	42.34	56.00	-13.66 QP
6	0.57617	0.02	9.61	23.47	33.10	46.00	-12.90 Average
7	1.381	0.03	9.59	29.84	39.46	56.00	-16.54 QP
8	1.381	0.03	9.59	21.97	31.59	46.00	-14.41 Average
9	1.868	0.03	9.63	29.85	39.51	56.00	-16.49 QP
10	1.868	0.03	9.63	21.88	31.54	46.00	-14.46 Average
11	14.213	0.16	9.75	20.82	30.73	50.00	-19.27 Average
12	14.213	0.16	9.75	28.90	38.81	60.00	-21.19 QP



Mode:e;Line:Neutral Line

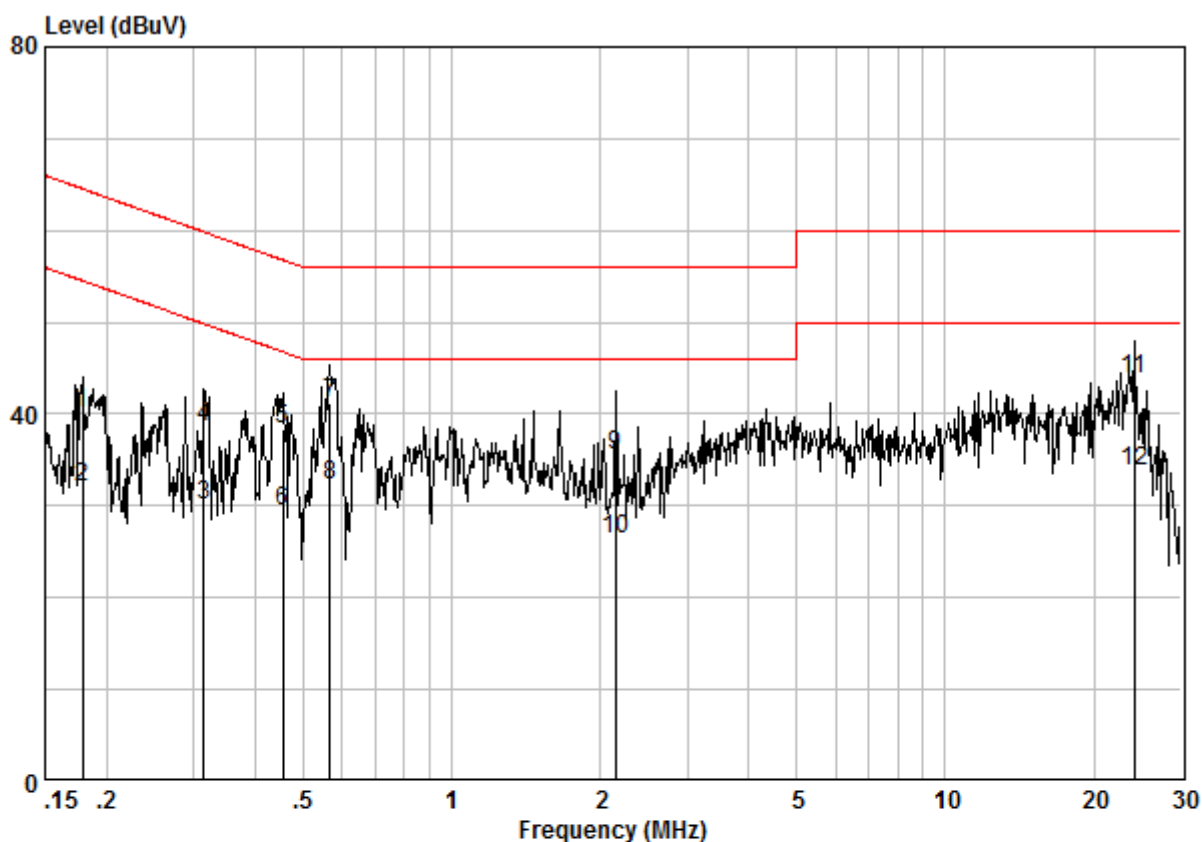


Site : Shielding Room
Condition : CE NEUTRAL
Job No. : 5519RG
Test Mode : e
: B78004G3203630

	Freq	Cable Loss	LISN Factor	Read Level	Limit Line	Over Limit	Remark
	MHz	dB	dB	dBuV	dBuV	dB	
1	0.17866	0.02	9.61	30.45	40.08	64.55	-24.47 QP
2	0.17866	0.02	9.61	22.44	32.07	54.55	-22.48 Average
3	0.31495	0.02	9.62	20.36	30.00	49.84	-19.84 Average
4	0.31495	0.02	9.62	28.98	38.62	59.84	-21.22 QP
5	0.45395	0.02	9.63	28.66	38.30	56.80	-18.50 QP
6	0.45395	0.02	9.63	19.87	29.52	46.80	-17.29 Average
7	0.56709	0.02	9.63	31.63	41.29	56.00	-14.71 QP
8	0.56709	0.02	9.63	22.58	32.23	46.00	-13.77 Average
9	2.144	0.03	9.66	25.78	35.47	56.00	-20.53 QP
10	2.144	0.03	9.66	16.65	26.34	46.00	-19.66 Average
11	24.142	0.16	10.10	33.61	43.87	60.00	-16.13 QP
12	24.142	0.16	10.10	23.63	33.89	50.00	-16.11 Average



B78004G3203630 & Battery (HB3080G1EBC)


Mode:d;Line:Live Line

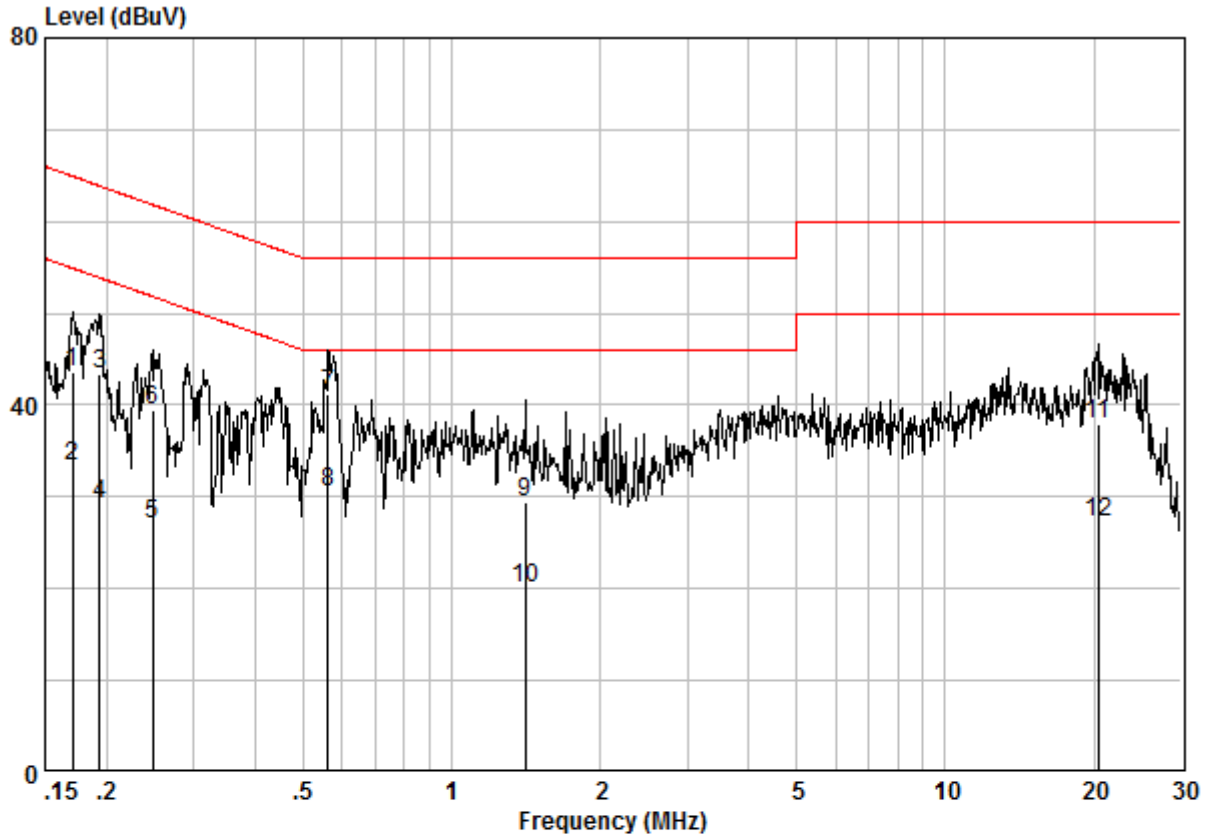

Site : Shielding Room
Condition : CE LINE
Job No. : 5519RG-2#
Test Mode : d
: B78004G3203630

	Freq	Cable Loss	LISN Factor	Read Level	Limit Level	Limit Line	Over Limit	Remark
	MHz	dB	dB	dBuV	dBuV	dBuV	dB	
1	0.17034	0.02	9.60	33.90	43.52	64.94	-21.43	QP
2	0.17034	0.02	9.60	23.80	33.42	54.94	-21.53	AVERAGE
3	0.19344	0.02	9.60	33.66	43.28	63.89	-20.61	QP
4	0.19344	0.02	9.60	19.67	29.29	53.89	-24.60	AVERAGE
5	0.24814	0.02	9.60	17.38	27.00	51.82	-24.82	AVERAGE
6	0.24814	0.02	9.60	29.91	39.53	61.82	-22.29	QP
7	0.56111	0.02	9.60	31.51	41.14	56.00	-14.86	QP
8	0.56111	0.02	9.60	20.95	30.57	46.00	-15.43	AVERAGE
9	1.411	0.03	9.59	19.74	29.36	56.00	-26.64	QP
10	1.411	0.03	9.59	10.47	20.09	46.00	-25.91	AVERAGE
11	20.377	0.17	9.79	27.87	37.83	60.00	-22.17	QP
12	20.377	0.17	9.79	17.39	27.35	50.00	-22.65	AVERAGE

Mode:d;Line:Neutral Line

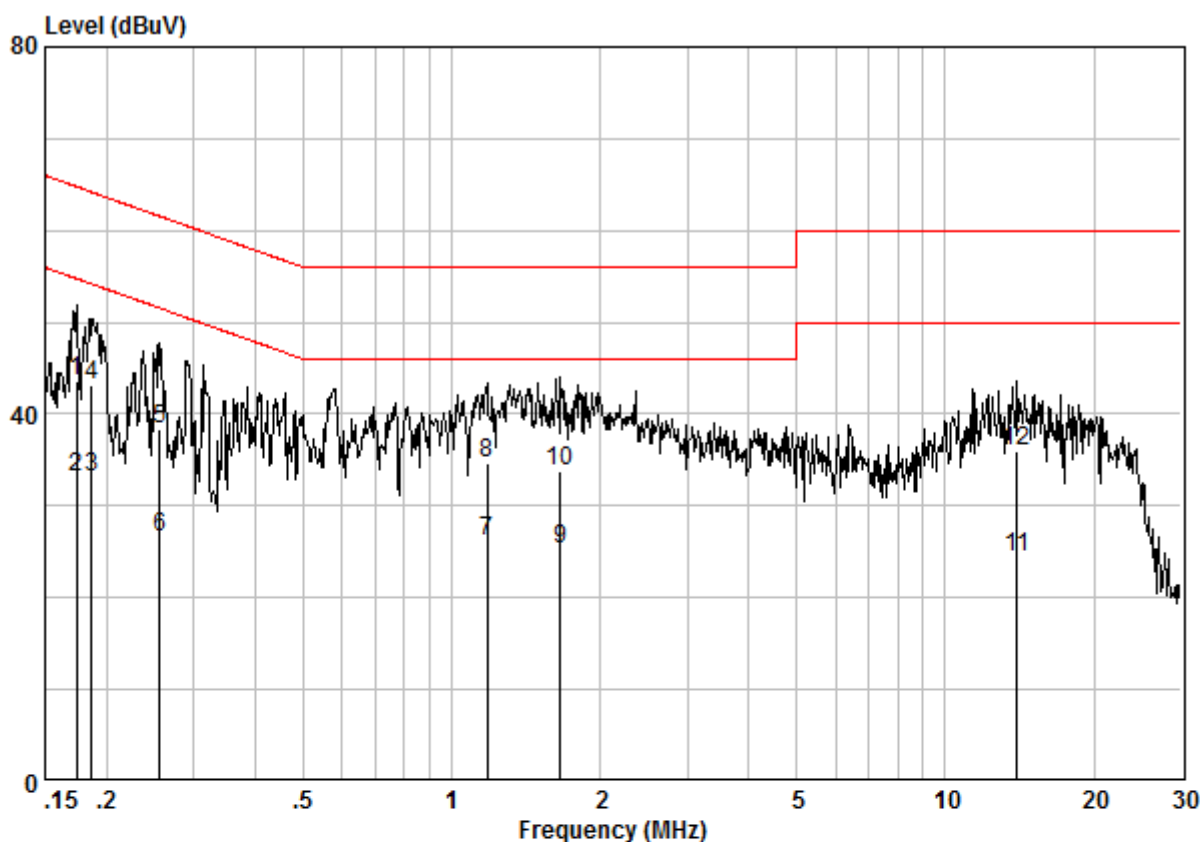


Site : Shielding Room
Condition : CE NEUTRAL
Job No. : 5519RG-2#
Test Mode : d
: B78004G3203630

	Freq	Cable Loss	LISN Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB	dBuV	dBuV	dBuV	dB	
1	0.17399	0.02	9.60	33.98	43.60	64.77	-21.17	QP
2	0.17399	0.02	9.60	23.59	33.21	54.77	-21.55	AVERAGE
3	0.18639	0.02	9.61	23.41	33.04	54.20	-21.15	AVERAGE
4	0.18639	0.02	9.61	33.42	43.05	64.20	-21.14	QP
5	0.25615	0.02	9.61	28.83	38.46	61.56	-23.09	QP
6	0.25615	0.02	9.61	16.89	26.52	51.56	-25.03	AVERAGE
7	1.178	0.03	9.65	16.57	26.25	46.00	-19.75	AVERAGE
8	1.178	0.03	9.65	25.05	34.73	56.00	-21.27	QP
9	1.662	0.03	9.65	15.69	25.37	46.00	-20.63	AVERAGE
10	1.662	0.03	9.65	24.21	33.89	56.00	-22.11	QP
11	13.989	0.15	9.88	14.45	24.49	50.00	-25.51	AVERAGE
12	13.989	0.15	9.88	25.92	35.96	60.00	-24.04	QP



H780K1G3X00570


Mode:d;Line:Live Line

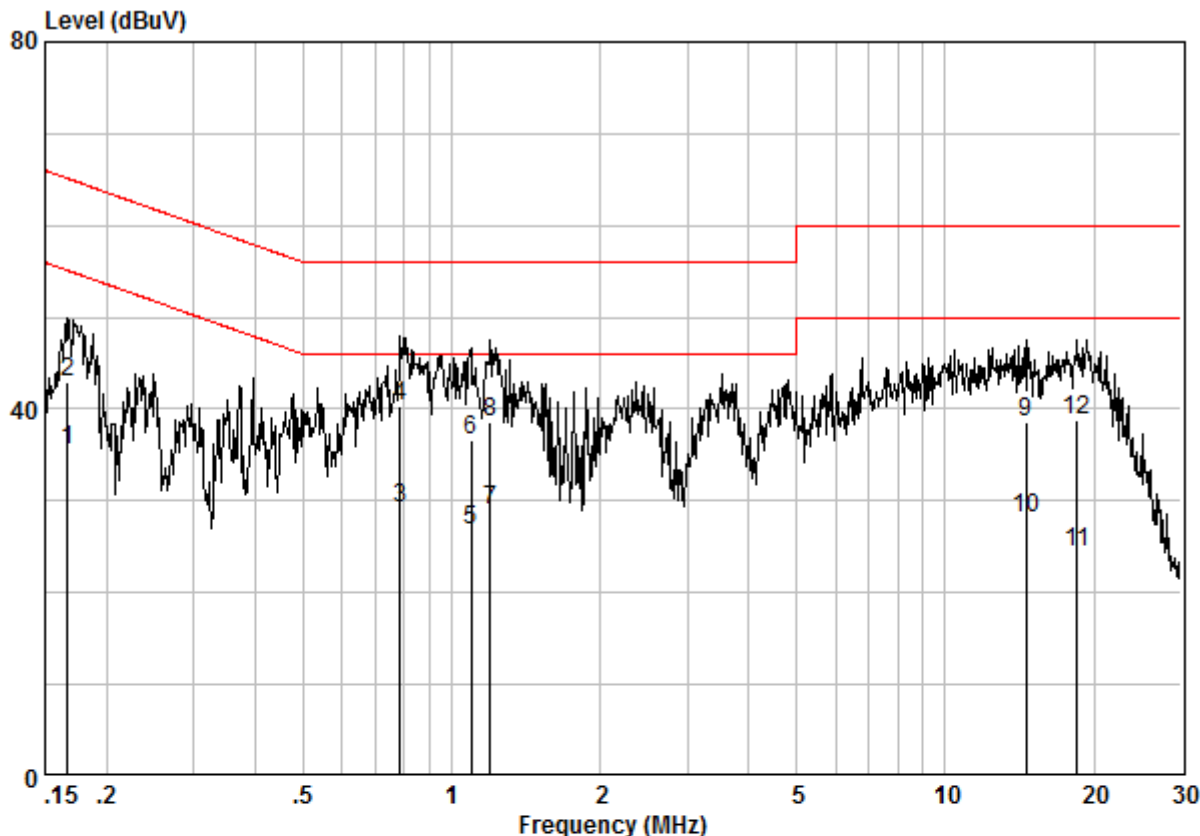

Site : Shielding Room
Condition : CE LINE
Job No. : 5519RG
Test Mode : d
: H780K1G3X00570

	Freq	Cable Loss	LISN Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB	dBuV	dBuV	dBuV	dB	
1	0.16677	0.02	9.60	25.94	35.56	55.12	-19.56	AVERAGE
2	0.16677	0.02	9.60	33.39	43.01	65.12	-22.11	QP
3	0.78761	0.03	9.60	19.64	29.26	46.00	-16.74	AVERAGE
4	0.78761	0.03	9.60	30.79	40.42	56.00	-15.58	QP
5	1.094	0.03	9.62	17.08	26.73	46.00	-19.27	AVERAGE
6	1.094	0.03	9.62	27.03	36.68	56.00	-19.32	QP
7	1.197	0.03	9.61	19.31	28.95	46.00	-17.05	AVERAGE
8	1.197	0.03	9.61	29.04	38.68	56.00	-17.32	QP
9	14.594	0.16	9.76	28.76	38.67	60.00	-21.33	QP
10	14.594	0.16	9.76	18.19	28.10	50.00	-21.90	AVERAGE
11	18.524	0.17	9.77	14.49	24.43	50.00	-25.57	AVERAGE
12	18.524	0.17	9.77	28.77	38.72	60.00	-21.28	QP

Mode:d;Line:Neutral Line

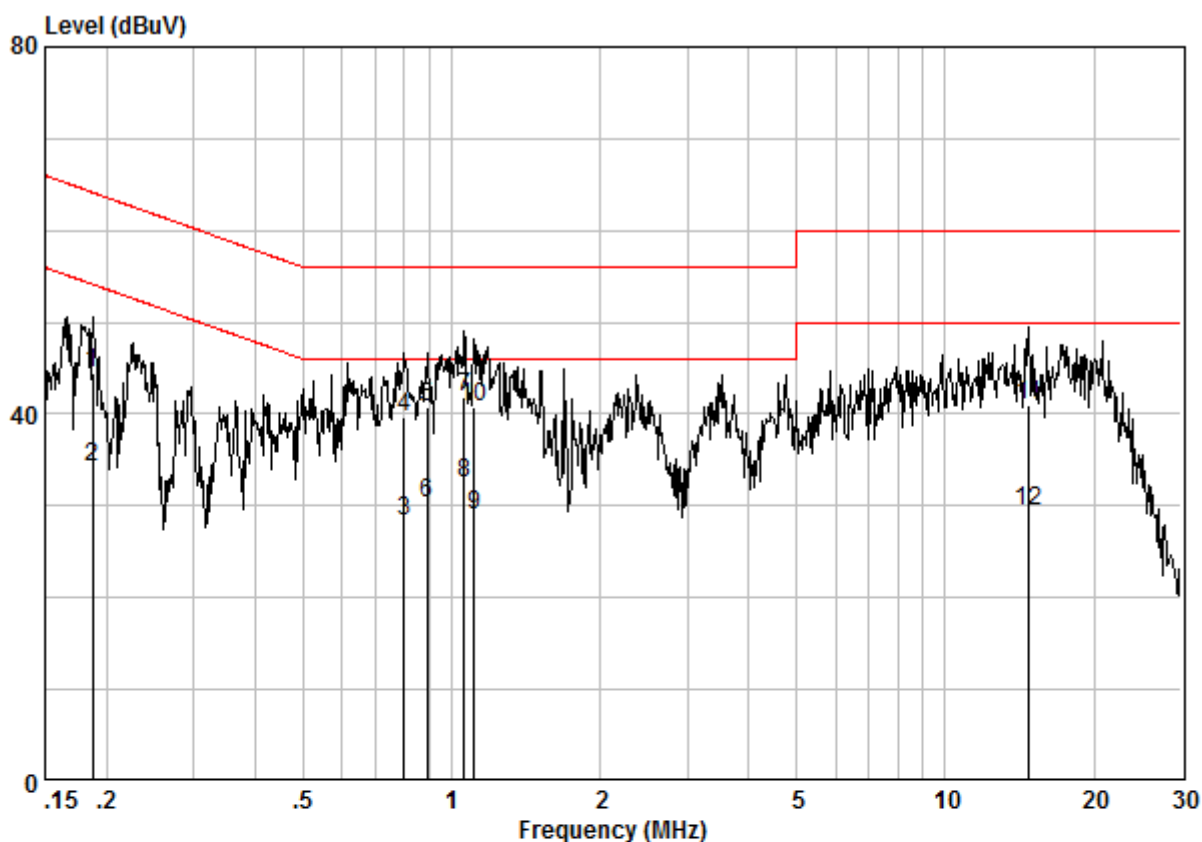


Site : Shielding Room
Condition : CE NEUTRAL
Job No. : 5519RG
Test Mode : d
: H780K1G3X00570

	Freq	Cable Loss	LISN Factor	Read Level	Limit Line	Over Limit	Remark
	MHz	dB	dB	dBuV	dBuV	dB	
1	0.18738	0.02	9.61	34.73	44.36	64.15	-19.79 QP
2	0.18738	0.02	9.61	24.49	34.13	54.15	-20.03 AVERAGE
3	0.80023	0.03	9.64	18.67	28.33	46.00	-17.67 AVERAGE
4	0.80023	0.03	9.64	30.01	39.68	56.00	-16.32 QP
5	0.88969	0.03	9.63	31.16	40.82	56.00	-15.18 QP
6	0.88969	0.03	9.63	20.58	30.24	46.00	-15.76 AVERAGE
7	1.060	0.03	9.65	32.08	41.76	56.00	-14.24 QP
8	1.060	0.03	9.65	22.85	32.53	46.00	-13.47 AVERAGE
9	1.111	0.03	9.65	19.31	28.99	46.00	-17.01 AVERAGE
10	1.111	0.03	9.65	31.02	40.70	56.00	-15.30 QP
11	14.750	0.16	9.89	30.85	40.90	60.00	-19.10 QP
12	14.750	0.16	9.89	19.33	29.38	50.00	-20.62 AVERAGE

P78015G3W10751


Mode:d;Line:Live Line

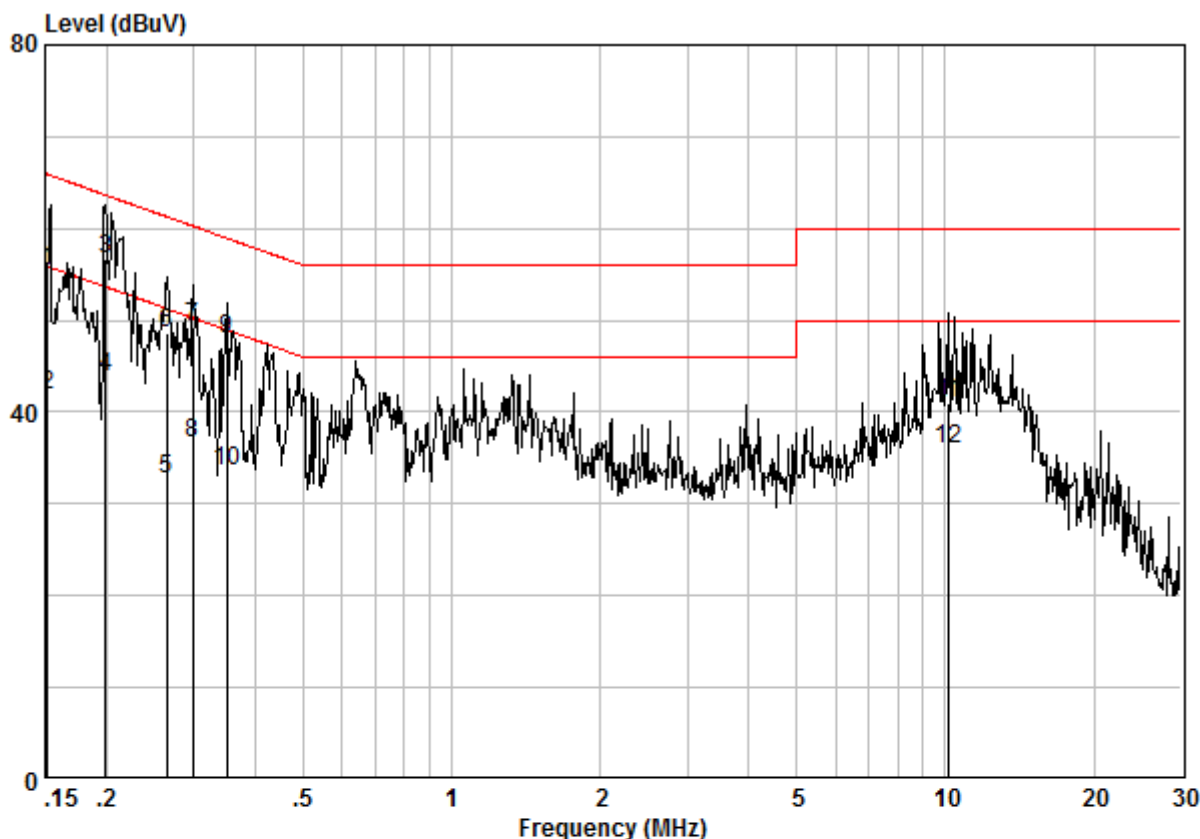

Site : Shielding Room
Condition : CE LINE
Job No. : 5519RG
Test Mode : d
: P78015G3W10751

	Freq	Cable Loss	LISN Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB	dBuV	dBuV	dBuV	dB	
1 @	0.15200	0.02	9.59	45.80	55.41	65.89	-10.48	QP
2	0.15200	0.02	9.59	32.30	41.91	55.89	-13.98	Average
3 @	0.19863	0.02	9.60	47.00	56.62	63.67	-7.05	QP
4 @	0.19863	0.02	9.60	34.30	43.92	53.67	-9.75	Average
5	0.26442	0.02	9.60	23.10	32.72	51.29	-18.57	Average
6	0.26442	0.02	9.60	39.05	48.66	61.29	-12.63	QP
7 @	0.29869	0.02	9.59	39.63	49.24	60.28	-11.04	QP
8	0.29869	0.02	9.59	27.11	36.72	50.28	-13.56	Average
9 @	0.35015	0.02	9.59	38.29	47.90	58.96	-11.06	QP
10	0.35015	0.02	9.59	24.00	33.61	48.96	-15.35	Average
11	10.179	0.14	9.71	31.20	41.05	60.00	-18.95	QP
12	10.179	0.14	9.71	26.20	36.05	50.00	-13.95	Average

Mode:d;Line:Neutral Line

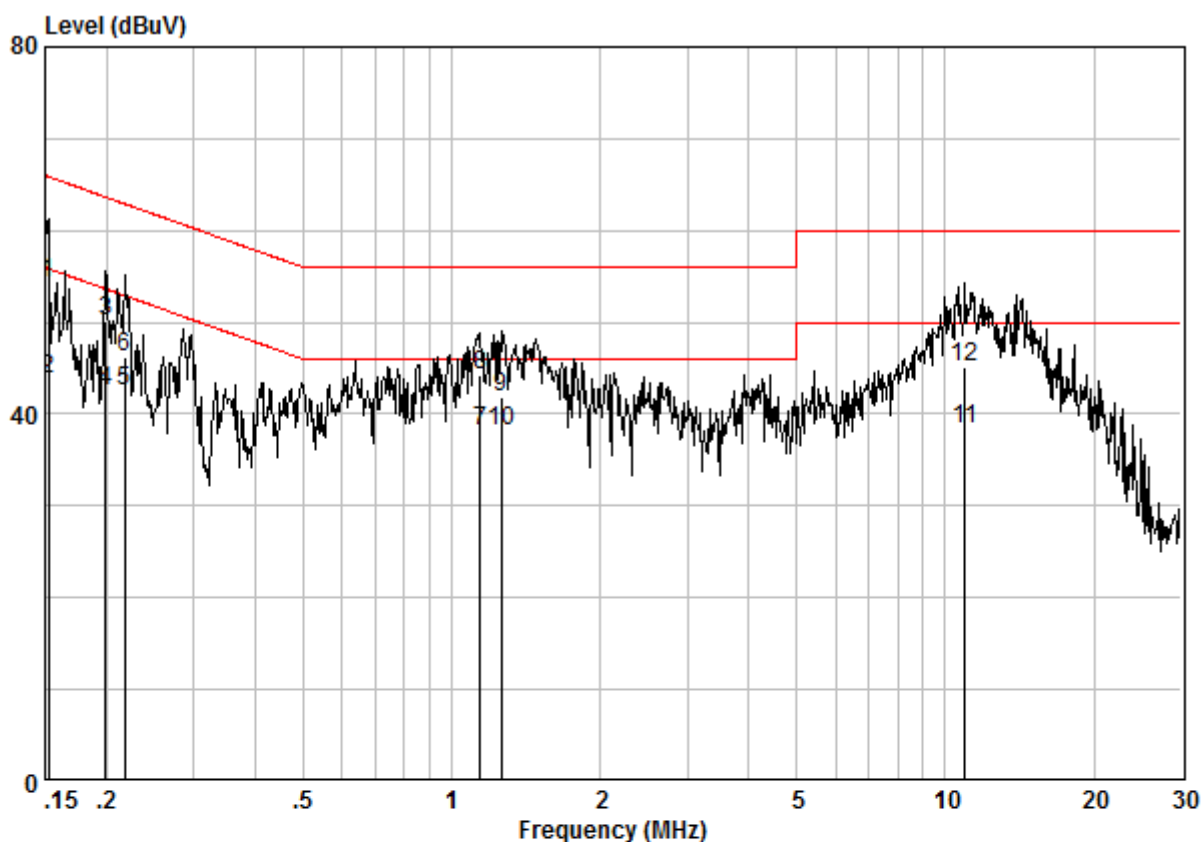


Site : Shielding Room
 Condition : CE NEUTRAL
 Job No. : 5519RG
 Test Mode : d
 : P78015G3W10751

	Freq	Cable Loss	LISN Factor	Read Level	Limit Line	Over Limit	Remark
	MHz	dB	dB	dBuV	dBuV	dB	
1 @	0.15240	0.02	9.62	44.75	54.38	65.87	-11.49 QP
2	0.15240	0.02	9.62	34.27	43.90	55.87	-11.96 AVERAGE
3	0.19863	0.02	9.62	40.54	50.18	63.67	-13.49 QP
4 @	0.19863	0.02	9.62	32.93	42.57	53.67	-11.10 AVERAGE
5 @	0.21735	0.02	9.62	32.80	42.43	52.92	-10.49 AVERAGE
6	0.21735	0.02	9.62	36.64	46.27	62.92	-16.65 QP
7 @	1.141	0.03	9.65	28.37	38.05	46.00	-7.95 AVERAGE
8	1.141	0.03	9.65	34.54	44.22	56.00	-11.78 QP
9	1.262	0.03	9.65	32.27	41.95	56.00	-14.05 QP
10 @	1.262	0.03	9.65	28.46	38.14	46.00	-7.86 AVERAGE
11	10.963	0.14	9.81	28.48	38.44	50.00	-11.56 AVERAGE
12	10.963	0.14	9.81	35.24	45.20	60.00	-14.80 QP

PC mode


Mode:f;Line:Live Line

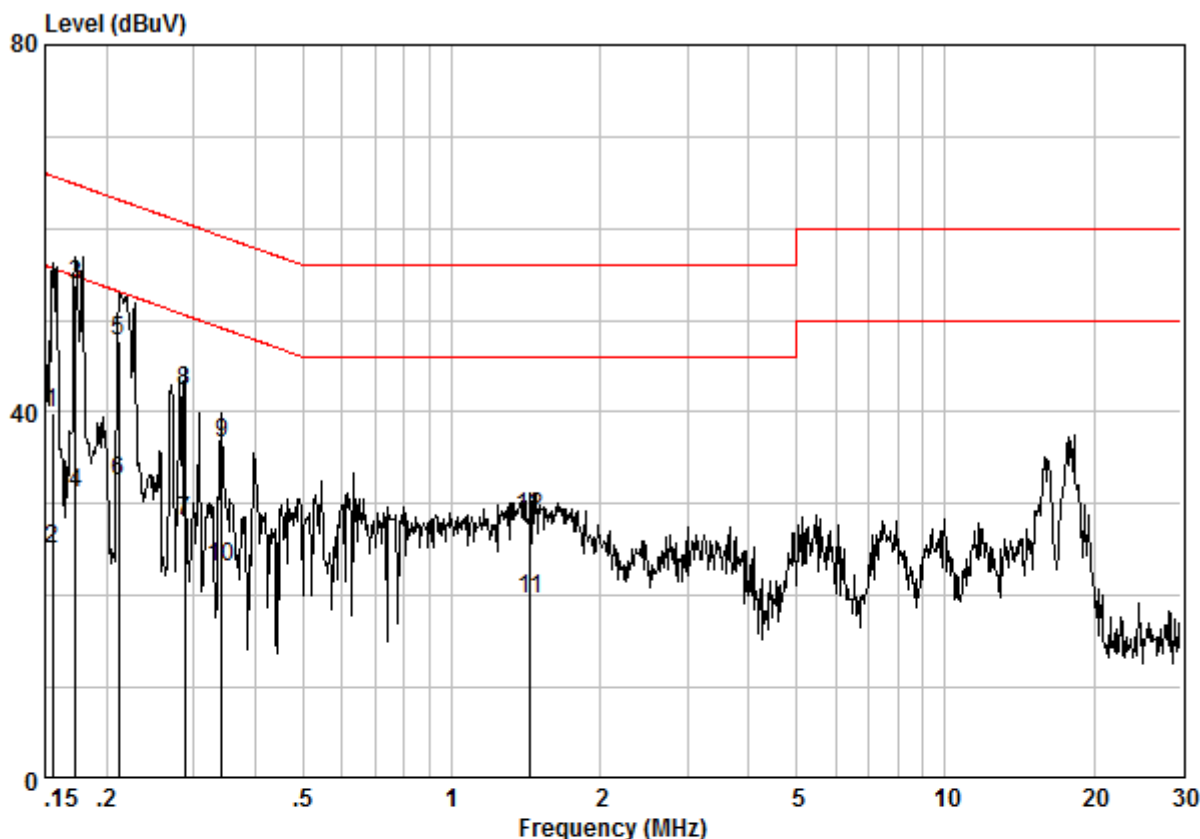

Site : Shielding Room
Condition : CE LINE
Job No. : 5519RG
Test Mode : f
: B78004G3203630

	Freq	Cable Loss	LISN Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB	dBuV	dBuV	dBuV	dB	
1	0.15567	0.02	9.59	30.20	39.81	65.69	-25.88	QP
2	0.15567	0.02	9.59	15.55	25.16	55.69	-30.53	AVERAGE
3	0.17307	0.02	9.60	44.23	53.85	64.81	-10.96	QP
4	0.17307	0.02	9.60	21.65	31.27	54.81	-23.54	AVERAGE
5	0.21167	0.02	9.60	38.21	47.83	63.14	-15.31	QP
6	0.21167	0.02	9.60	22.80	32.42	53.14	-20.72	AVERAGE
7	0.28782	0.02	9.59	18.51	28.12	50.59	-22.47	AVERAGE
8	0.28782	0.02	9.59	32.64	42.25	60.59	-18.34	QP
9	0.34281	0.02	9.59	27.05	36.66	59.13	-22.47	QP
10	0.34281	0.02	9.59	13.46	23.07	49.13	-26.06	AVERAGE
11	1.441	0.03	9.59	10.05	19.66	46.00	-26.34	AVERAGE
12	1.441	0.03	9.59	18.95	28.57	56.00	-27.43	QP

Mode:f;Line:Neutral Line

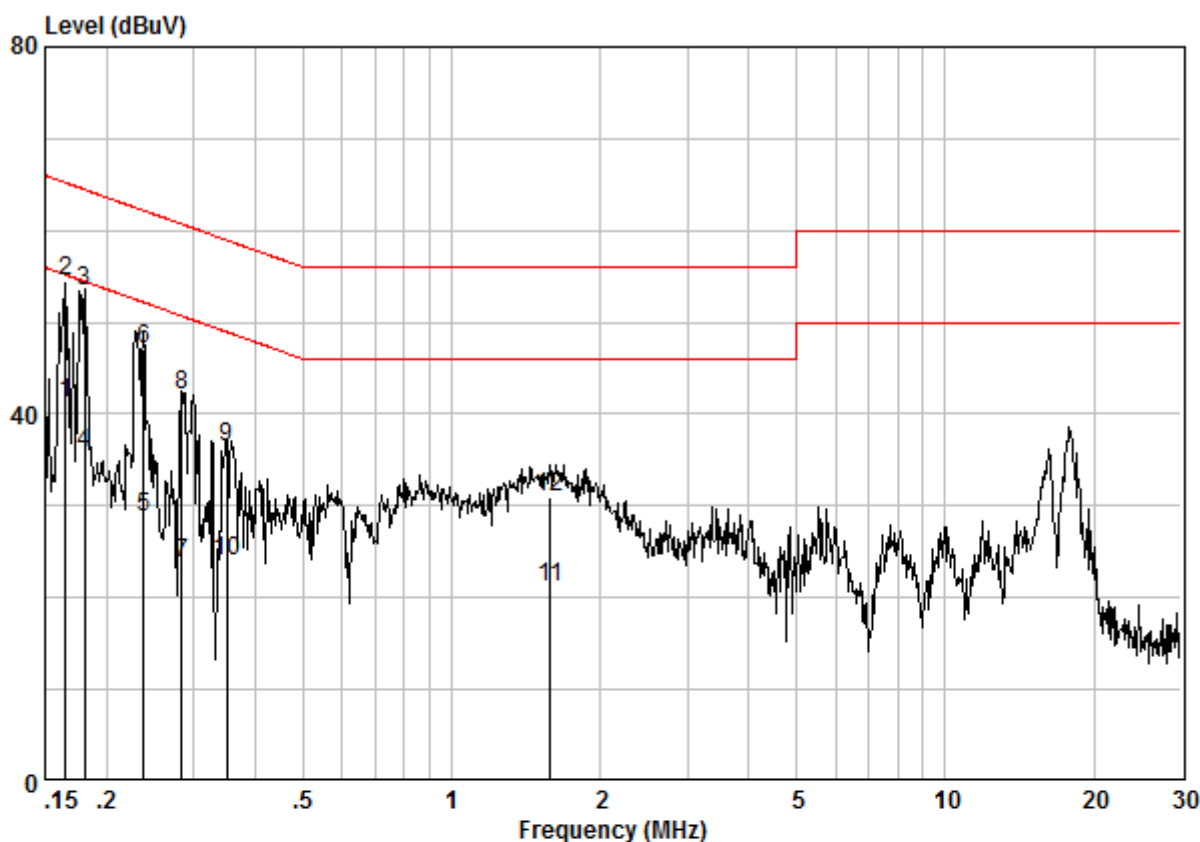

Site : Shielding Room
Condition : CE NEUTRAL
Job No. : 5519RG
Test Mode : f
: B78004G3203630

	Freq	Cable Loss	LISN Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB	dBuV	dBuV	dBuV	dB	
1	0.16501	0.02	9.60	31.67	41.30	55.21	-13.91	AVERAGE
2 @	0.16501	0.02	9.60	44.97	54.60	65.21	-10.61	QP
3	0.18056	0.02	9.61	43.78	53.41	64.46	-11.05	QP
4	0.18056	0.02	9.61	26.10	35.72	54.46	-18.74	AVERAGE
5	0.23784	0.02	9.61	19.22	28.85	52.17	-23.32	AVERAGE
6	0.23784	0.02	9.61	37.52	47.15	62.17	-15.02	QP
7	0.28328	0.02	9.62	14.17	23.80	50.72	-26.92	AVERAGE
8	0.28328	0.02	9.62	32.41	42.04	60.72	-18.68	QP
9	0.35015	0.02	9.62	26.83	36.47	58.96	-22.49	QP
10	0.35015	0.02	9.62	14.26	23.90	48.96	-25.06	AVERAGE
11	1.585	0.03	9.64	11.40	21.07	46.00	-24.93	AVERAGE
12	1.585	0.03	9.64	21.36	31.04	56.00	-24.96	QP



6.2 Radiated Disturbance(30MHz-1GHz)

Test Requirement:	47 CFR PART 15,Subpart B:2015
Test Method:	ANSI C63.4
Frequency Range:	30MHz to 1GHz
Limit:	
30MHz -88MHz	29.5(dBμV/m) quasi-peak
88MHz-216MHz	33.1(dBμV/m) quasi-peak
216MHz-960MHz	35.6(dBμV/m) quasi-peak
960MHz-1000MHz	43.5(dBμV/m) quasi-peak
Detector:	Peak for pre-scan (120kHz resolution bandwidth) 30M to1000MHz

6.2.1 E.U.T. Operation

Operating Environment:						
Temperature:	25.0	°C	Humidity:	51	% RH	Atmospheric Pressure: 1010 mbar
Test mode	a: charge + WiFi idle mode + earphone b: charge + Bluetooth Classic idle mode + earphone c: charge + Bluetooth Low Energy idle mode + earphone d: charge + REC mode (Front Camera)/ (Rear Camera) which is worst. e: charge + Playing mode + earphone f: PC mode.					


6.2.2 Measurement Data

An initial pre-scan was performed in the chamber using the spectrum analyser in peak detection mode. Quasi-peak measurements were conducted based on the peak sweep graph. The EUT was measured by BiConiLog antenna with 2 orthogonal polarities.



B78004G3203630

Mode:a;Polarization:Horizontal

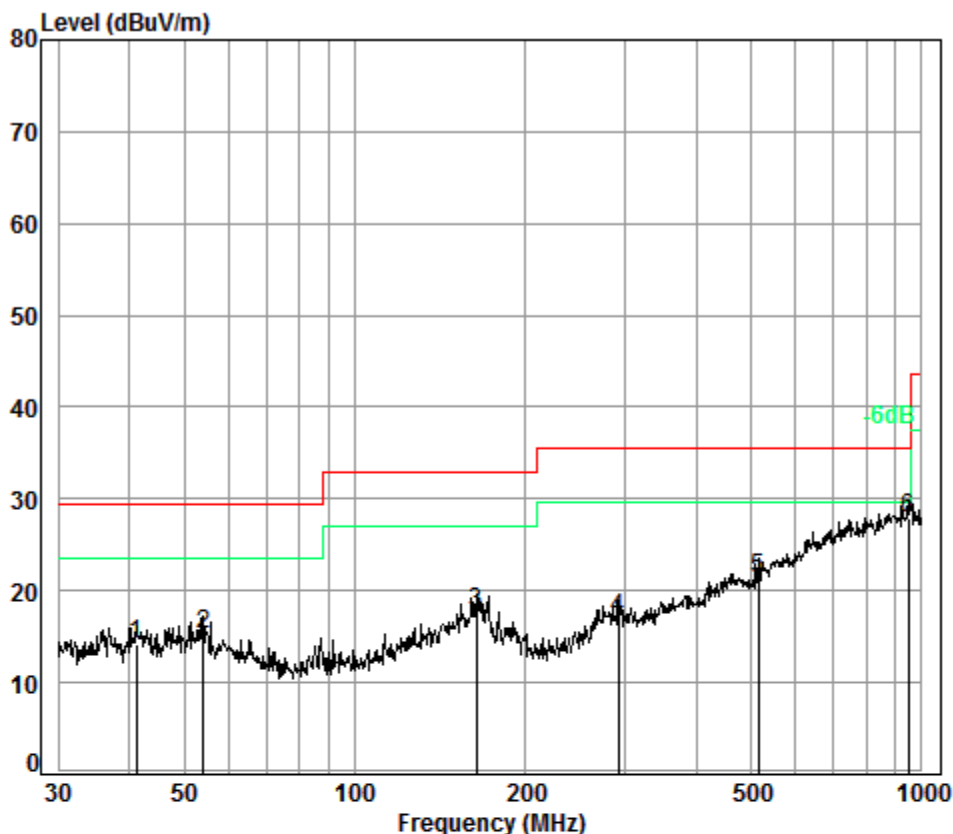

Condition: 10m HORIZONTAL


Job No. : 5519RG

Test Mode: a

: B78004G3203630

	Freq	Cable Loss	Ant Factor	Preamplifier Factor	Read Level	Level	Limit Line	Over Limit
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1	41.28	6.80	13.21	32.99	27.08	14.10	29.50	-15.40
2	54.07	6.98	12.45	32.98	28.73	15.18	29.50	-14.32
3	163.76	7.50	13.02	32.73	29.89	17.68	33.00	-15.32
4	292.06	8.03	12.46	32.61	29.04	16.92	35.60	-18.68
5	515.44	8.68	17.09	32.60	28.30	21.47	35.60	-14.13
6 pp	948.76	9.57	22.72	32.50	28.06	27.85	35.60	-7.75

Mode:a;Polarization:Vertical

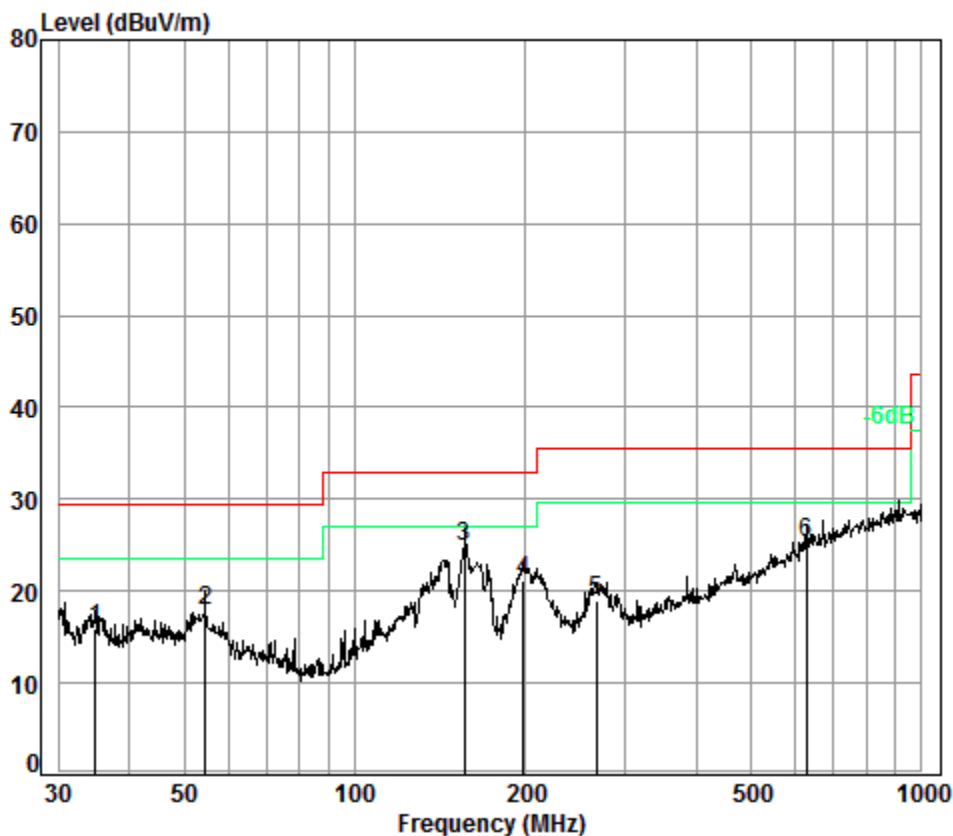

Condition: 10m VERTICAL


Job No. : 5519RG

Test Mode: a

: B78004G3203630

	Freq	Cable Loss	Ant Factor	Preamplifier Factor	Read Level	Level	Limit Line	Over Limit
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1	34.88	6.70	12.64	32.98	29.55	15.91	29.50	-13.59
2	54.45	6.99	12.42	32.98	31.53	17.96	29.50	-11.54
3 pp	156.46	7.48	13.40	32.74	36.78	24.92	33.00	-8.08
4	198.59	7.59	9.36	32.70	36.85	21.10	33.00	-11.90
5	266.61	7.94	11.73	32.63	31.96	19.00	35.60	-16.60
6	625.08	8.96	19.22	32.60	29.71	25.29	35.60	-10.31

Mode:b;Polarization:Horizontal

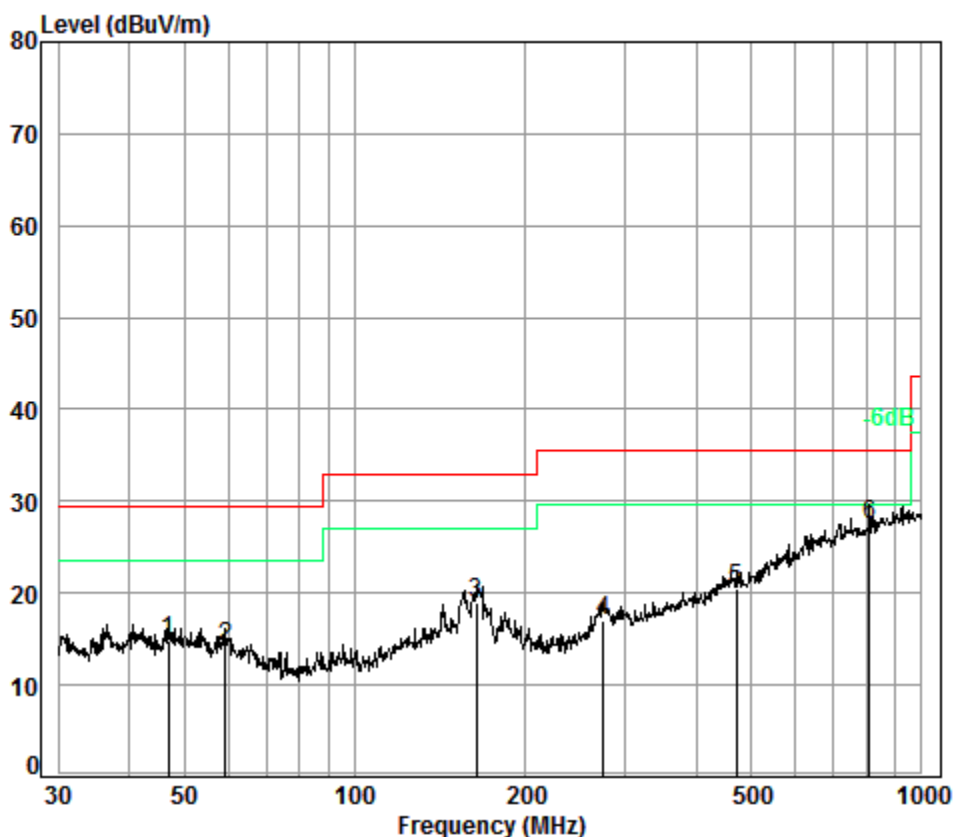

Condition: 10m HORIZONTAL

Job No. : 5519RG


Test Mode: b

: B78004G3203630

	Freq	Cable Loss	Ant Factor	Preamplifier Factor	Read Level	Limit Level	Limit Line	Over Limit
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1	46.99	6.84	12.85	33.00	28.20	14.89	29.50	-14.61
2	59.23	7.00	12.06	32.95	27.97	14.08	29.50	-15.42
3	163.76	7.50	13.02	32.73	31.11	18.90	33.00	-14.10
4	274.19	7.97	11.98	32.62	29.67	17.00	35.60	-18.60
5	470.52	8.48	16.40	32.60	28.21	20.49	35.60	-15.11
6 pp	810.27	9.30	21.30	32.59	29.54	27.55	35.60	-8.05



Mode:b;Polarization:Vertical

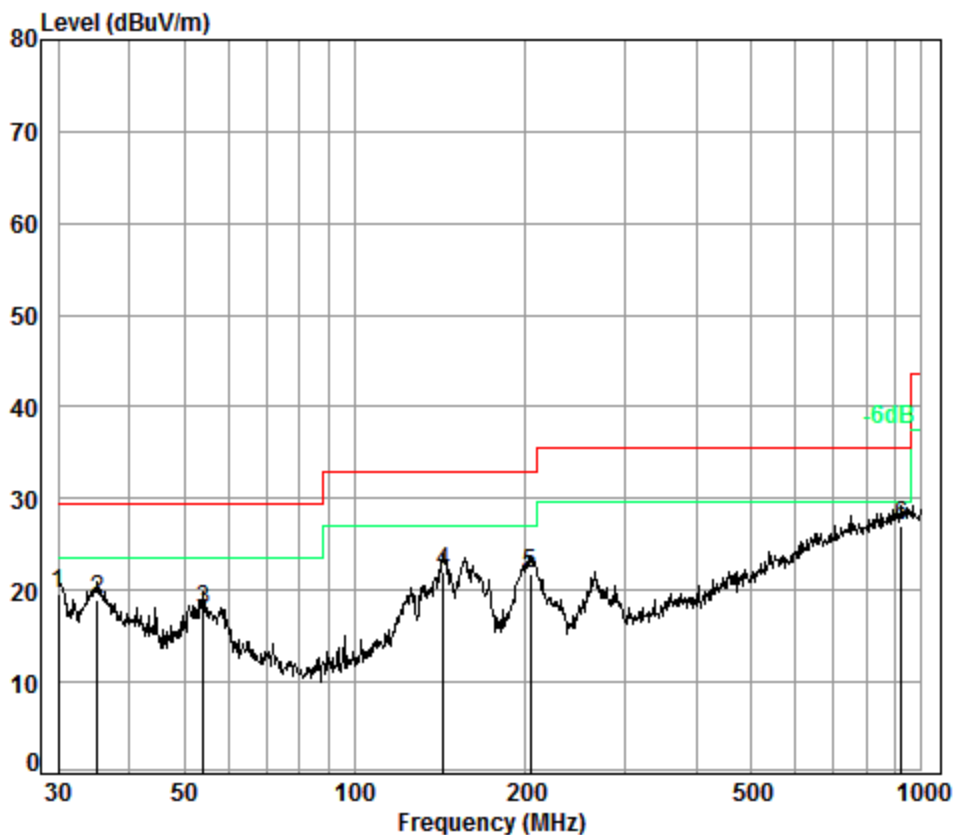

Condition: 10m VERTICAL

Job No. : 5519RG


Test Mode: b

: B78004G3203630

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1	30.00	6.70	12.47	32.97	33.52	19.72	29.50	-9.78
2	35.25	6.71	12.68	32.98	32.58	18.99	29.50	-10.51
3	54.07	6.98	12.45	32.98	31.40	17.85	29.50	-11.65
4	143.33	7.42	12.98	32.75	34.32	21.97	33.00	-11.03
5	204.24	7.62	9.39	32.69	37.39	21.71	33.00	-11.29
6 pp	919.29	9.50	22.48	32.50	27.63	27.11	35.60	-8.49



Mode:c;Polarization:Horizontal

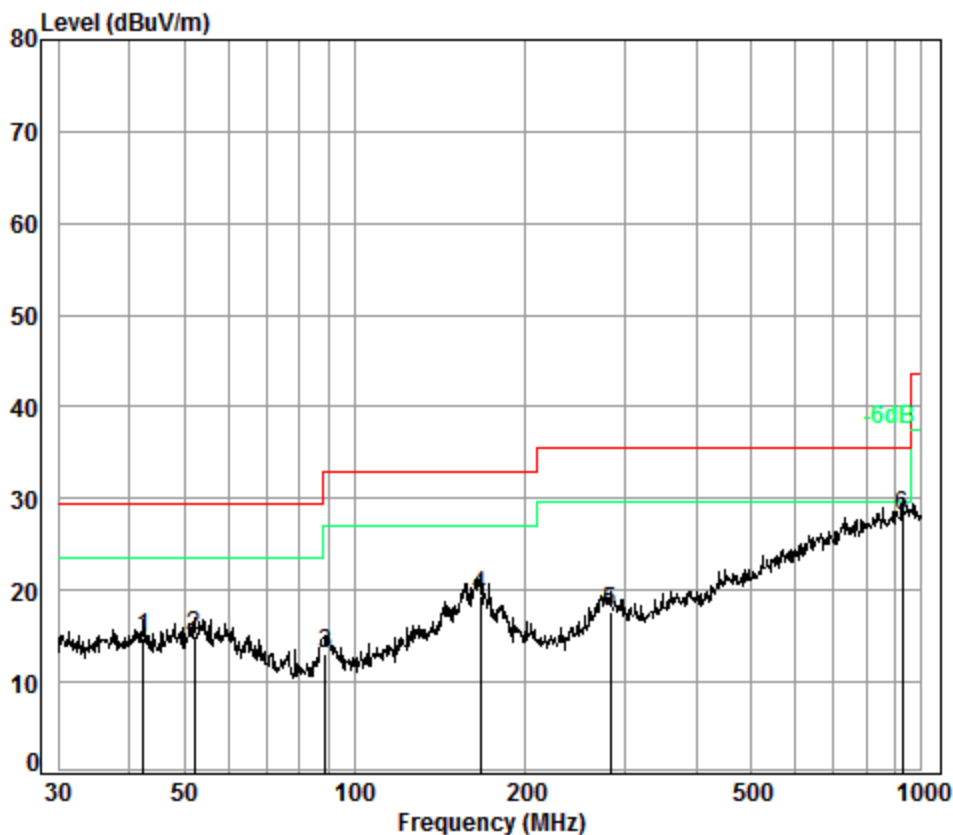

Condition: 10m HORIZONTAL


Job No. : 5519RG

Test Mode: c

: B78004G3203630

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1	42.45	6.80	13.11	32.99	27.85	14.77	29.50	-14.73
2	52.21	6.95	12.60	32.99	28.40	14.96	29.50	-14.54
3	88.96	7.19	8.68	32.83	30.11	13.15	33.00	-19.85
4	166.65	7.50	12.74	32.73	31.97	19.48	33.00	-13.52
5	282.99	8.01	12.24	32.61	30.09	17.73	35.60	-17.87
6 pp	925.76	9.51	22.57	32.50	28.54	28.12	35.60	-7.48

Mode:c;Polarization:Vertical

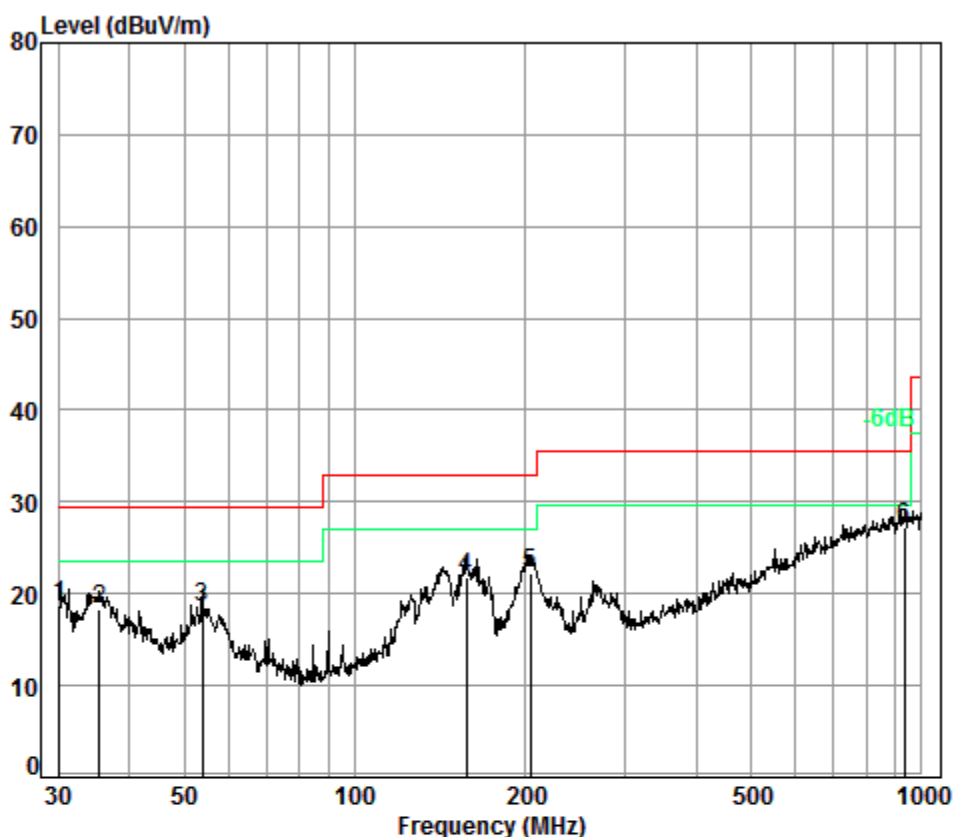

Condition: 10m VERTICAL


Job No. : 5519RG

Test Mode: c

: B78004G3203630

	Freq	Cable Loss	Ant Factor	Preamplifier Factor	Read Level	Level	Limit Line	Over Limit
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1	30.21	6.70	12.48	32.97	32.63	18.84	29.50	-10.66
2	35.50	6.71	12.71	32.98	31.85	18.29	29.50	-11.21
3	53.88	6.98	12.46	32.98	32.12	18.58	29.50	-10.92
4	157.56	7.49	13.39	32.73	33.75	21.90	33.00	-11.10
5	204.24	7.62	9.39	32.69	37.81	22.13	33.00	-10.87
6 pp	932.27	9.53	22.61	32.50	27.61	27.25	35.60	-8.35

Mode:d;Polarization:Horizontal

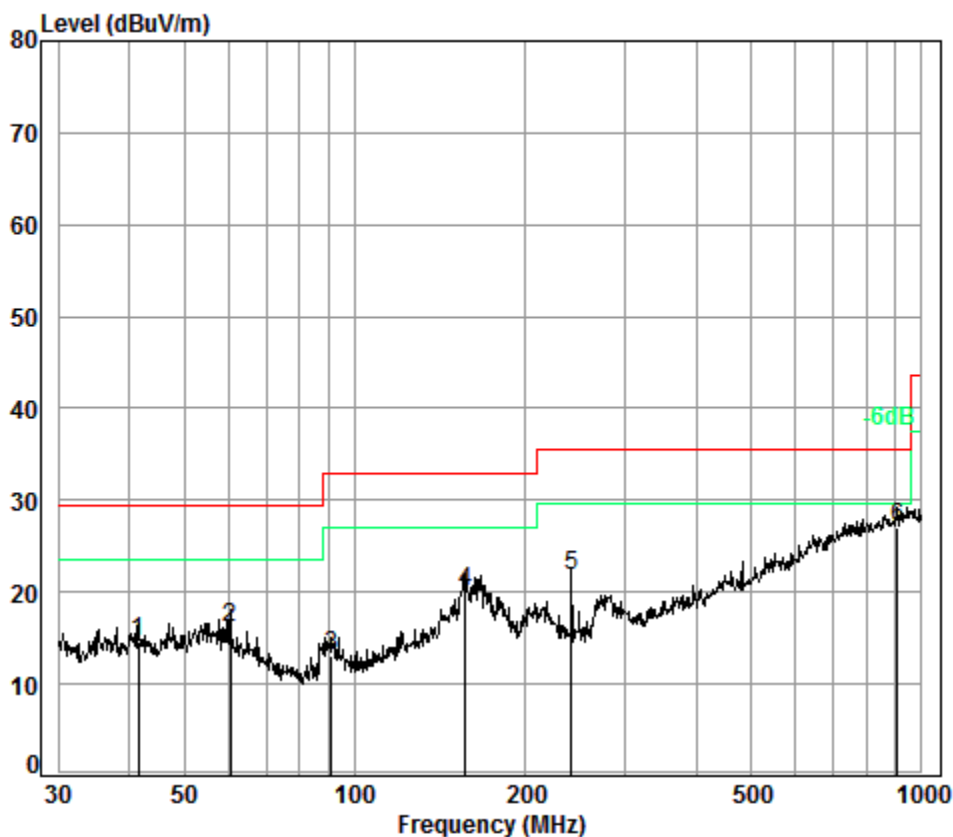

Condition: 10m HORIZONTAL


Job No. : 5519RG

Test Mode: d

: B78004G3203630

		Cable	Ant	Preamp	Read		Limit	Over
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1	41.57	6.80	13.18	32.99	27.60	14.59	29.50	-14.91
2	60.49	7.00	11.90	32.95	30.23	16.18	29.50	-13.32
3	90.86	7.20	8.75	32.83	29.89	13.01	33.00	-19.99
4	157.01	7.49	13.40	32.73	31.81	19.97	33.00	-13.03
5	240.83	7.80	11.08	32.65	35.52	21.75	35.60	-13.85
6 pp	906.48	9.50	22.31	32.50	27.81	27.12	35.60	-8.48

Mode:d;Polarization:Vertical

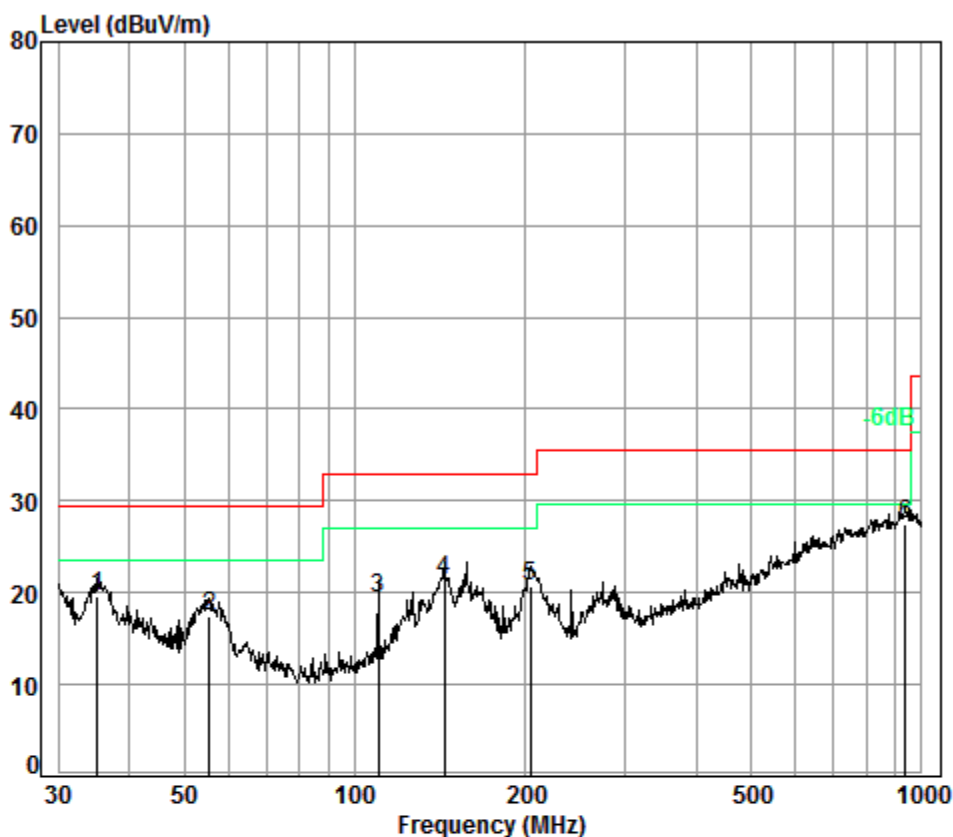

Condition: 10m VERTICAL


Job No. : 5519RG

Test Mode: d

: B78004G3203630

		Cable	Ant	Preamp	Read		Limit	Over
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1	35.25	6.71	12.68	32.98	33.13	19.54	29.50	-9.96
2	55.41	7.00	12.34	32.97	30.96	17.33	29.50	-12.17
3	110.18	7.25	10.39	32.79	34.47	19.32	33.00	-13.68
4	143.83	7.42	13.01	32.75	33.66	21.34	33.00	-11.66
5	204.24	7.62	9.39	32.69	36.48	20.80	33.00	-12.20
6 pp	935.55	9.54	22.63	32.50	27.81	27.48	35.60	-8.12

Mode:e;Polarization:Horizontal

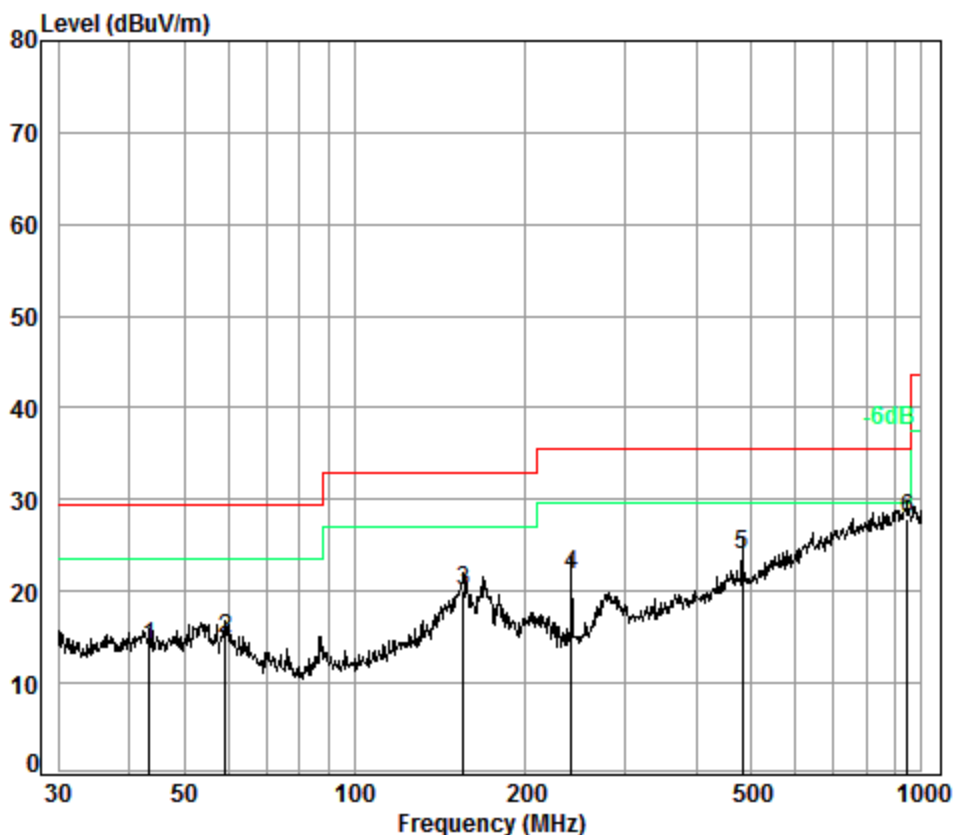

Condition: 10m HORIZONTAL

Job No. : 5519RG


Test Mode: e

: B78004G3203630

	Freq	Cable Loss	Ant Factor	Preamplifier Factor	Read Level	Level	Limit Line	Over Limit
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1	43.51	6.80	13.02	32.99	27.08	13.91	29.50	-15.59
2	59.23	7.00	12.06	32.95	28.61	14.72	29.50	-14.78
3	155.36	7.48	13.40	32.74	31.82	19.96	33.00	-13.04
4	240.83	7.80	11.08	32.65	35.59	21.82	35.60	-13.78
5	482.22	8.51	16.55	32.60	31.58	24.04	35.60	-11.56
6 pp	945.44	9.56	22.70	32.50	28.06	27.82	35.60	-7.78



Mode:e;Polarization:Vertical

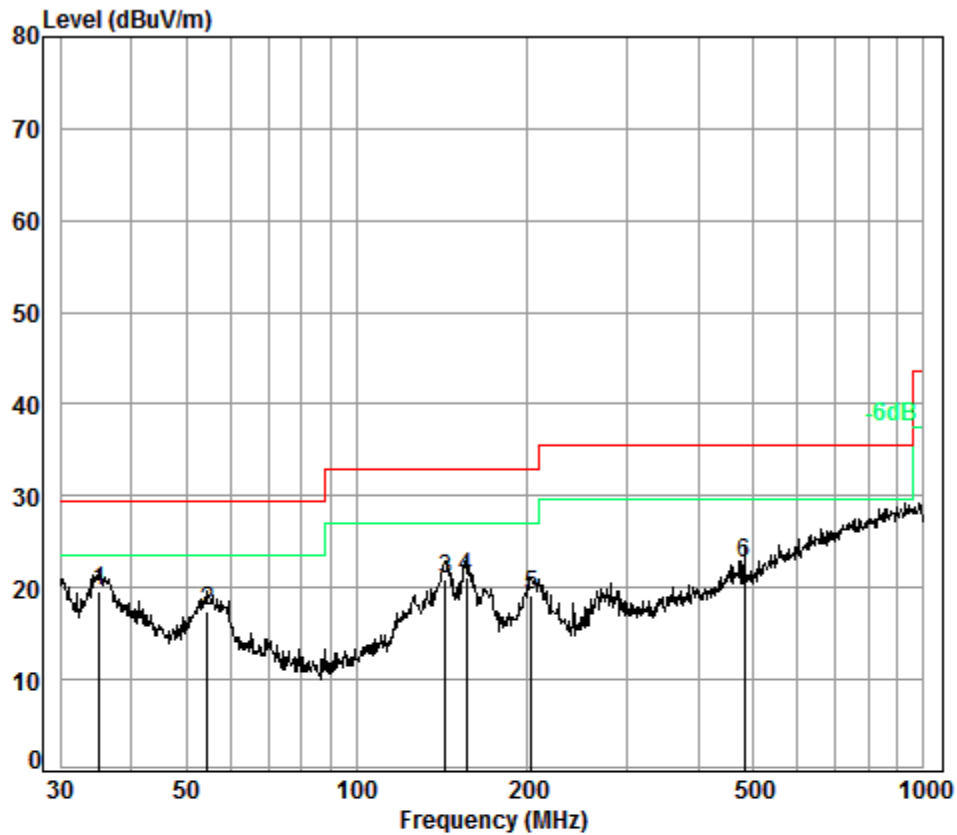

Condition: 10m VERTICAL

Job No. : 5519RG

Test Mode: e


: B78004G3203630

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1 pp	35.13	6.70	12.66	32.98	33.33	19.71	29.50	-9.79
2	54.64	6.99	12.40	32.97	31.09	17.51	29.50	-11.99
3	143.33	7.42	12.98	32.75	33.30	20.95	33.00	-12.05
4	156.46	7.48	13.40	32.74	33.11	21.25	33.00	-11.75
5	203.52	7.62	9.38	32.70	34.79	19.09	33.00	-13.91
6	482.22	8.51	16.55	32.60	30.14	22.60	35.60	-13.00



B78004G3203630 & Battery (HB3080G1EBC)

Mode:d;Polarization:Horizontal

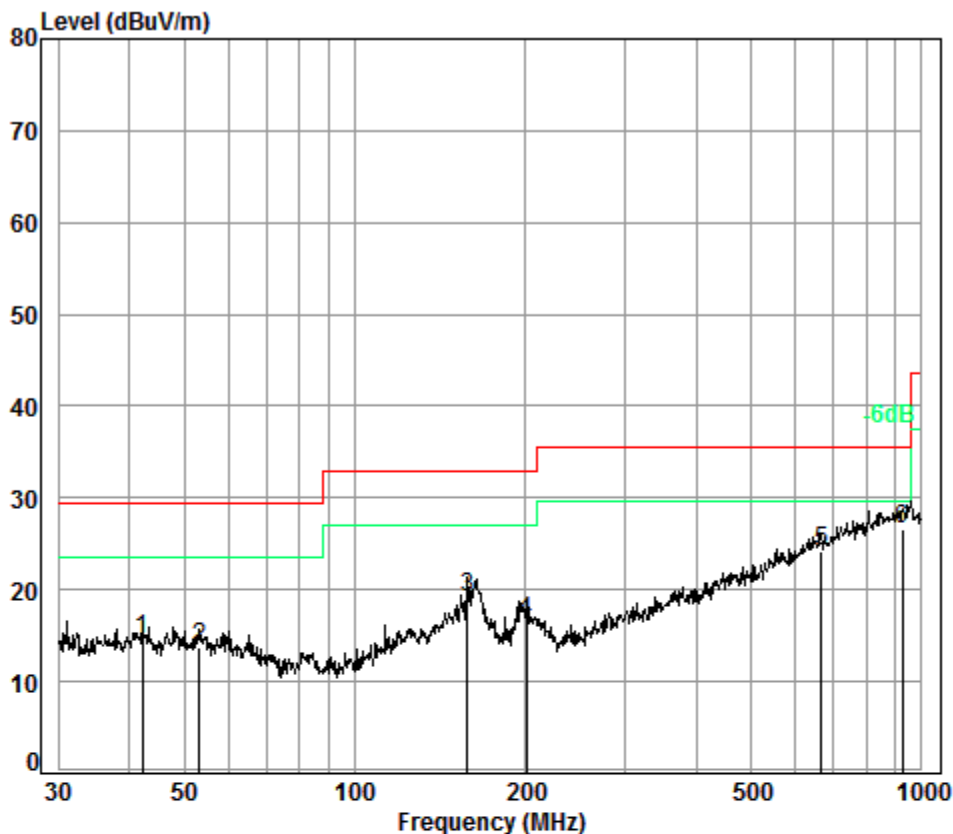

Condition: 10m HORIZONTAL


Job No. : 5519RG-2#

Test Mode: d

: P78015G3W10751

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1	42.15	6.80	13.13	32.99	27.68	14.62	29.50	-14.88
2	53.13	6.96	12.52	32.98	27.22	13.72	29.50	-15.78
3	158.11	7.49	13.39	32.73	31.11	19.26	33.00	-13.74
4	200.69	7.60	9.31	32.70	32.46	16.67	33.00	-16.33
5	665.80	9.07	19.73	32.60	28.06	24.26	35.60	-11.34
6 pp	925.76	9.51	22.57	32.50	27.01	26.59	35.60	-9.01

Mode:d;Polarization:Vertical

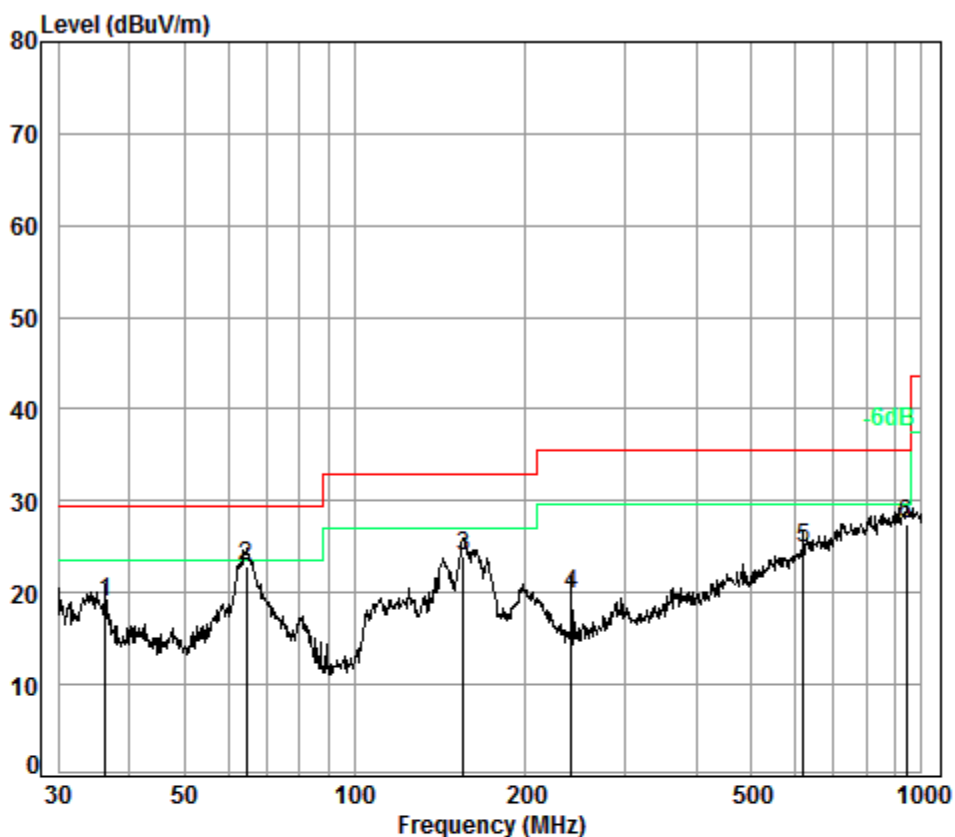

Condition: 10m VERTICAL

Job No. : 5519RG-2#

Test Mode: d


: P78015G3W10751

		Cable	Ant	Preamp	Read	Limit	Over
	Freq	Loss	Factor	Factor	Level	Line	Limit
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dB
1	36.38	6.73	12.84	32.98	32.33	18.92	29.50 -10.58
2	64.43	7.00	11.11	32.93	37.67	22.85	29.50 -6.65
3	155.36	7.48	13.40	32.74	35.90	24.04	33.00 -8.96
4	240.83	7.80	11.08	32.65	33.56	19.79	35.60 -15.81
5	618.54	8.95	19.09	32.60	29.41	24.85	35.60 -10.75
6	938.83	9.55	22.65	32.50	27.78	27.48	35.60 -8.12



H780K1G3X00570

Mode:d;Polarization:Horizontal

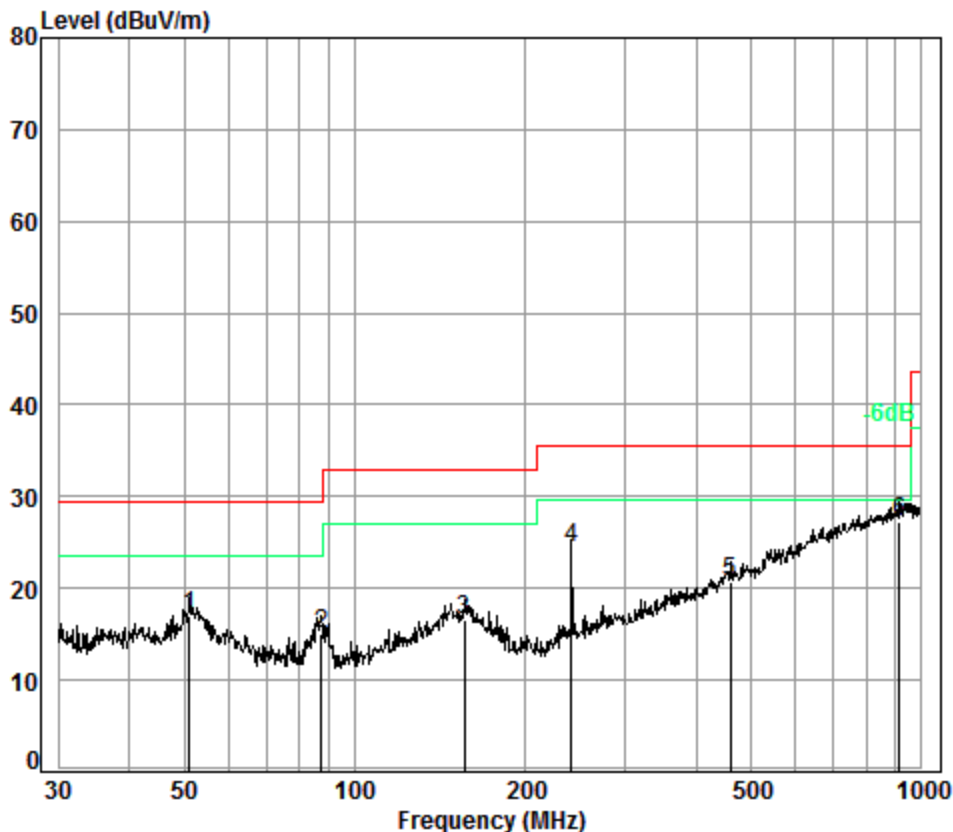

Condition: 10m HORIZONTAL


Job No. : 5519RG

Test Mode: d

: H780K1G3X00570

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1	51.12	6.92	12.69	32.99	30.34	16.96	29.50	-12.54
2	87.42	7.18	8.65	32.84	31.99	14.98	29.50	-14.52
3	155.91	7.48	13.40	32.74	28.50	16.64	33.00	-16.36
4	240.83	7.80	11.08	32.65	38.10	24.33	35.60	-11.27
5	459.11	8.45	16.28	32.60	28.68	20.81	35.60	-14.79
6 pp	912.86	9.50	22.40	32.50	27.95	27.35	35.60	-8.25

Mode:d;Polarization:Vertical

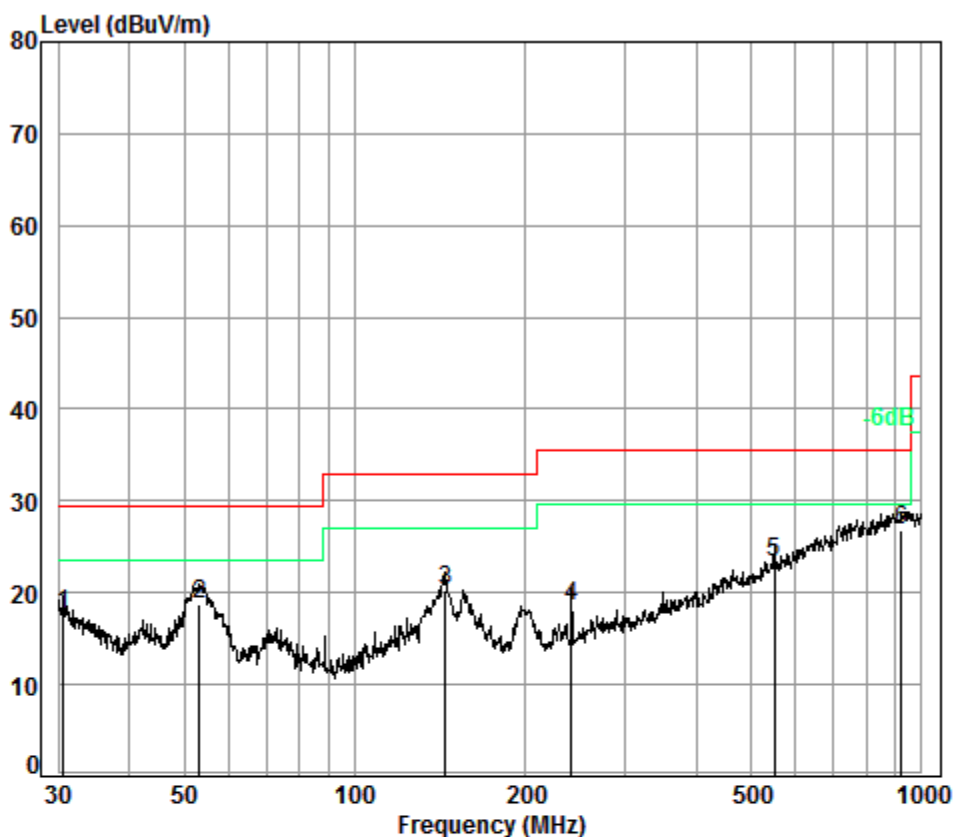

Condition: 10m VERTICAL

Job No. : 5519RG

Test Mode: d


: H780K1G3X00570

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit	Over
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1	30.64	6.70	12.49	32.97	31.34	17.56	29.50	-11.94
2	53.32	6.97	12.51	32.98	32.35	18.85	29.50	-10.65
3	144.84	7.43	13.08	32.75	32.55	20.31	33.00	-12.69
4	240.83	7.80	11.08	32.65	32.35	18.58	35.60	-17.02
5	550.95	8.78	17.75	32.60	29.34	23.27	35.60	-12.33
6 pp	922.52	9.51	22.53	32.50	27.19	26.73	35.60	-8.87



P78015G3W10751

Mode:d;Polarization:Horizontal

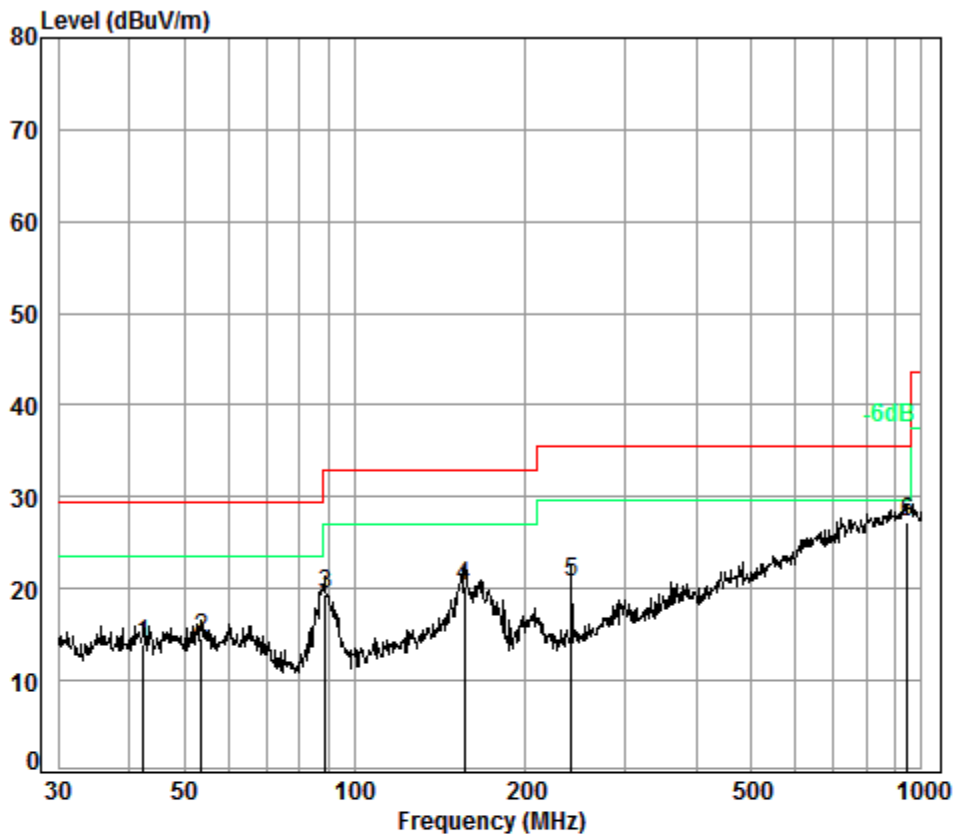

Condition: 10m HORIZONTAL


Job No. : 5519RG

Test Mode: d

: P78015G3W10751

		Cable	Ant	Preamp	Read		Limit	Over
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1	42.45	6.80	13.11	32.99	27.11	14.03	29.50	-15.47
2	53.69	6.97	12.48	32.98	28.17	14.64	29.50	-14.86
3	88.65	7.19	8.67	32.83	36.30	19.33	33.00	-13.67
4	155.91	7.48	13.40	32.74	32.21	20.35	33.00	-12.65
5	240.83	7.80	11.08	32.65	34.38	20.61	35.60	-14.99
6 pp	942.13	9.56	22.68	32.50	27.54	27.28	35.60	-8.32

Mode:d;Polarization:Vertical

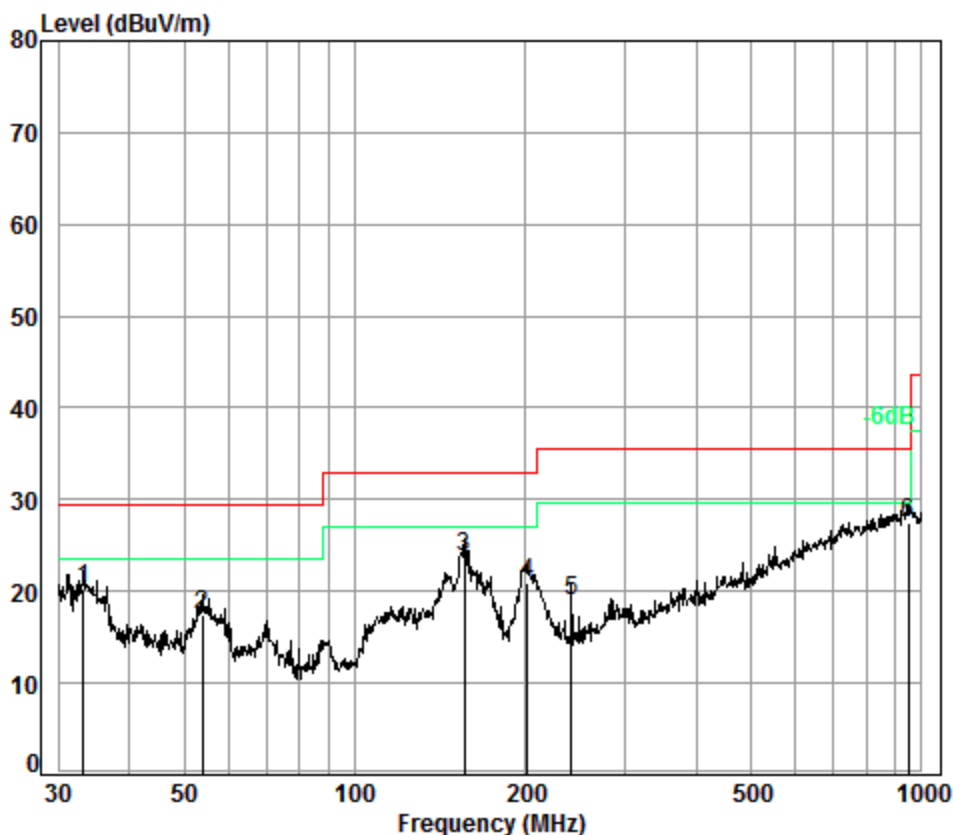

Condition: 10m VERTICAL

Job No. : 5519RG

Test Mode: d


: P78015G3W10751

		Cable	Ant	Preamp	Read		Limit	Over
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1	33.21	6.70	12.58	32.97	33.87	20.18	29.50	-9.32
2	53.88	6.98	12.46	32.98	31.05	17.51	29.50	-11.99
3	156.46	7.48	13.40	32.74	35.54	23.68	33.00	-9.32
4	201.39	7.61	9.32	32.70	36.68	20.91	33.00	-12.09
5	240.83	7.80	11.08	32.65	32.71	18.94	35.60	-16.66
6 pp	948.76	9.57	22.72	32.50	27.58	27.37	35.60	-8.23



PC mode

Mode:f;Polarization:Horizontal

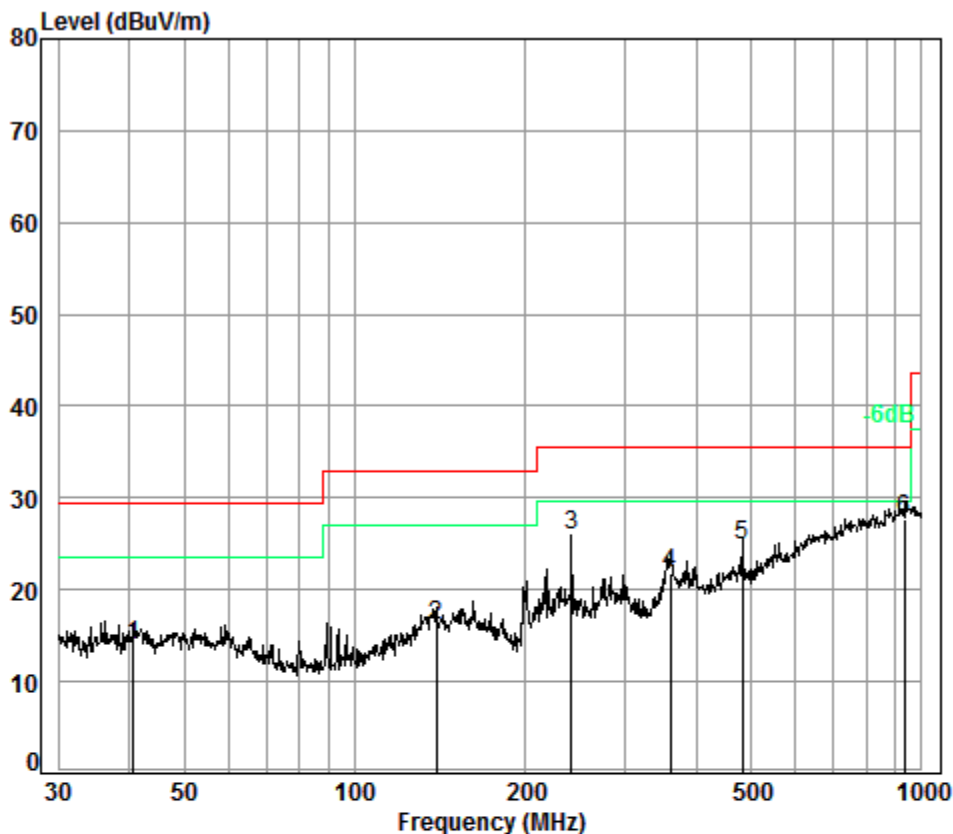


Condition: 10m HORIZONTAL

Job No. : 5519RG

Test Mode: f

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1	40.70	6.80	13.26	32.99	26.98	14.05	29.50	-15.45
2	139.36	7.40	12.71	32.75	28.72	16.08	33.00	-16.92
3	240.83	7.80	11.08	32.65	39.68	25.91	35.60	-9.69
4	360.45	8.30	14.07	32.60	32.13	21.90	35.60	-13.70
5	482.22	8.51	16.55	32.60	32.31	24.77	35.60	-10.83
6 pp	932.27	9.53	22.61	32.50	28.08	27.72	35.60	-7.88

Mode:f;Polarization:Vertical

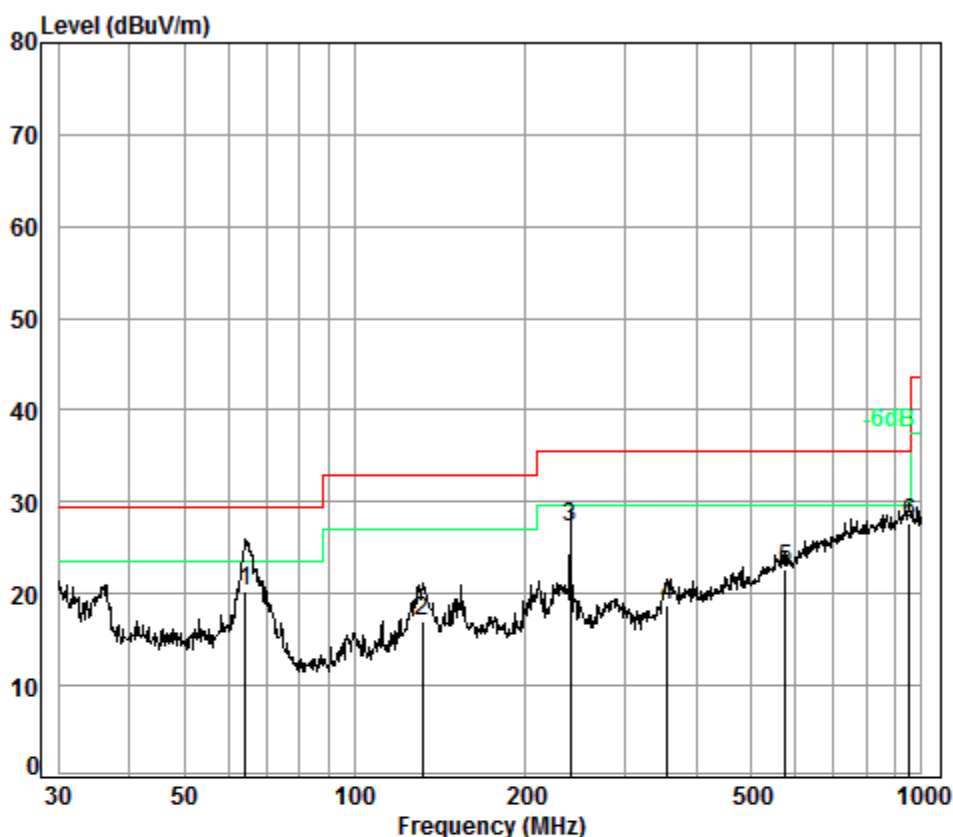

Condition: 10m VERTICAL

Job No. : 5519RG

Test Mode: f

		Cable	Ant	Preamp	Read		Limit	Over
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1 qp	64.21	7.00	11.15	32.93	35.10	20.32	29.50	-9.18
2	131.76	7.36	12.16	32.76	30.28	17.04	33.00	-15.96
3	239.99	7.80	11.07	32.66	41.09	27.30	35.60	-8.30
4	355.43	8.28	13.96	32.60	29.02	18.66	35.60	-16.94
5	574.63	8.84	18.17	32.60	28.18	22.59	35.60	-13.01
6 pp	952.09	9.58	22.74	32.50	27.96	27.78	35.60	-7.82



6.3 Radiated Disturbance(above 1GHz)

Test Requirement: 47 CFR PART 15, Subpart B:2015
Test Method: ANSI C63.4
Frequency Range: Above 1GHz
Limit:
Above 1GHz 74(dBμV/m) peak, 54(dBμV/m) average
Detector: Peak for pre-scan (1000kHz resolution bandwidth) 1000M to 18000MHz

6.3.1 E.U.T. Operation

Operating Environment:							
Temperature:	25.0	°C	Humidity:	50	% RH	Atmospheric Pressure:	1010 mbar
Test mode	a: charge + WiFi idle mode + earphone b: charge + Bluetooth Classic idle mode + earphone c: charge + Bluetooth Low Energy idle mode + earphone d: charge + REC mode (Front Camera)/ (Rear Camera) which is worst. e: charge + Playing mode + earphone f: PC mode.						


6.3.2 Measurement Data

An initial pre-scan was performed in the chamber using the spectrum analyser in peak detection mode. Quasi-peak measurements were conducted based on the peak sweep graph. The EUT was measured by BiConiLog antenna with 2 orthogonal polarities.



B78004G3203630

Mode:a;Polarization:Horizontal

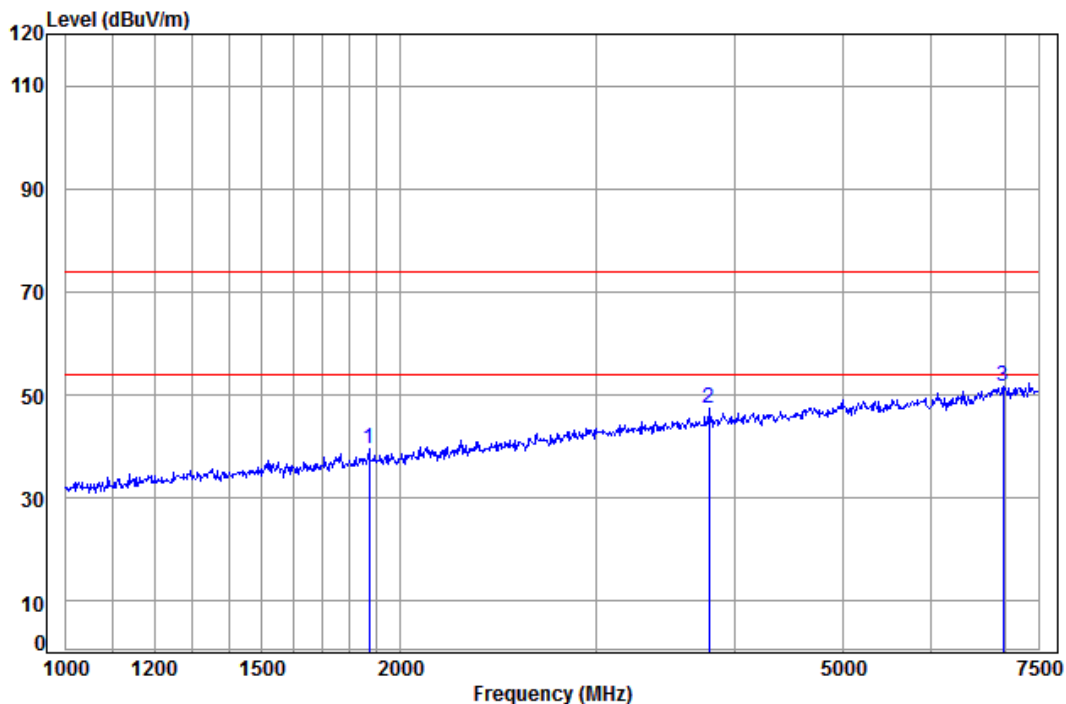

Condition: 3m Horizontal


Job No: : 5519RG

Mode: : a

		Cable	Ant	Preamp	Read		Limit	Over	
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1875.077	4.89	27.35	38.09	45.30	39.45	74.00	-34.55	Peak
2	3788.048	6.54	33.03	38.61	46.41	47.37	74.00	-26.63	Peak
3 pp	6975.238	9.49	36.43	38.41	44.20	51.71	74.00	-22.29	Peak



Mode:a;Polarization:Vertical

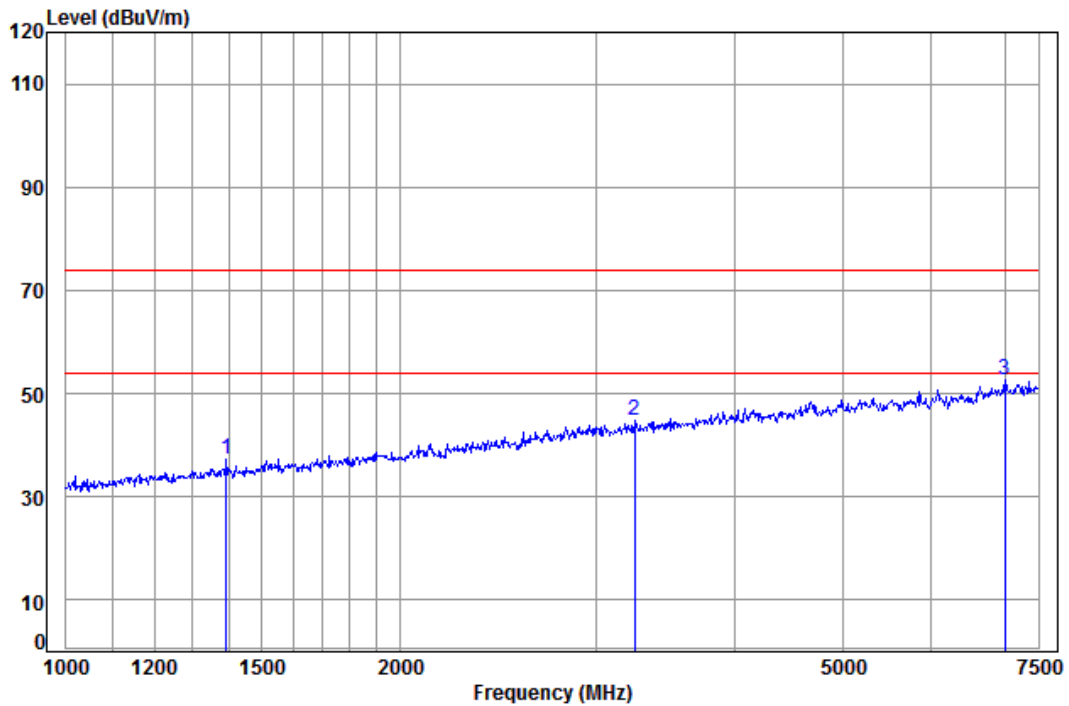

Condition: 3m Vertical


Job No: : 5519RG

Mode: : a

		Cable	Ant	Preamp	Read		Limit	Over	
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1394.393	4.34	25.37	38.05	45.75	37.41	74.00	-36.59	Peak
2	3250.206	6.12	31.77	38.34	45.34	44.89	74.00	-29.11	Peak
3 pp	7003.404	9.51	36.50	38.40	44.98	52.59	74.00	-21.41	Peak



Mode:b;Polarization:Horizontal

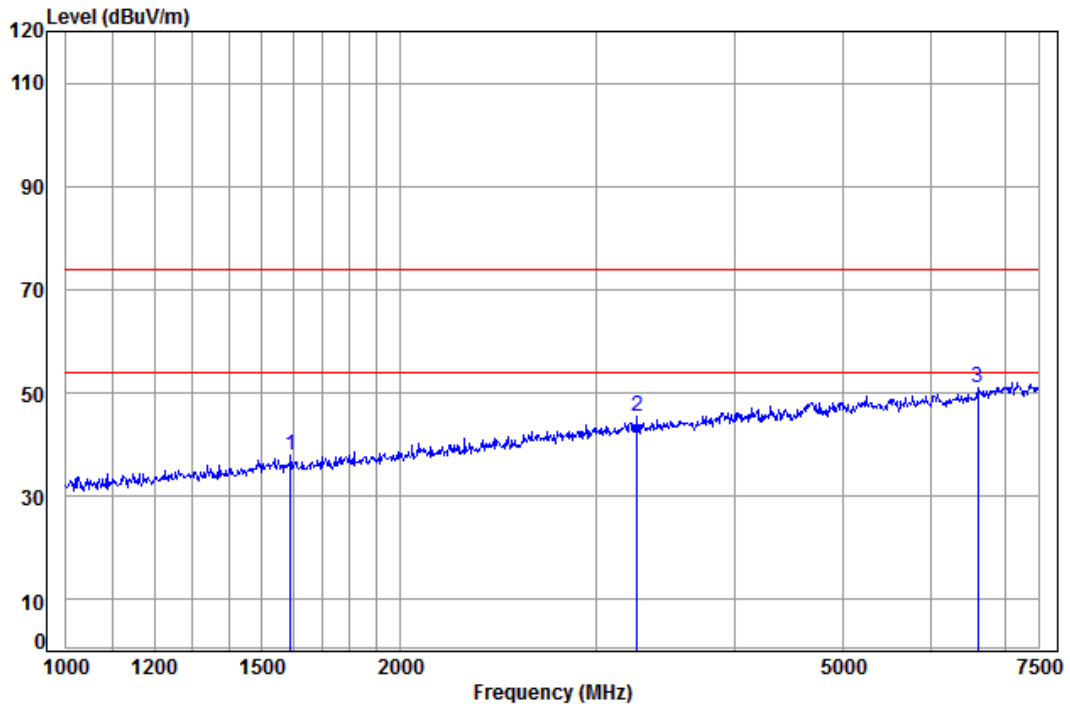

Condition: 3m Horizontal

Job No: : 5519RG

Mode: : b

		Cable	Ant	Preamp	Read	Limit	Over	
	Freq	Loss	Factor	Factor	Level	Line	Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1	1592.719	4.58	26.22	38.07	45.08	37.81	74.00	-36.19 Peak
2	3263.330	6.13	31.79	38.35	45.92	45.49	74.00	-28.51 Peak
3 pp	6619.230	9.17	35.44	38.62	44.90	50.89	74.00	-23.11 Peak




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM160700551903

Page: 52 of 67

Mode:b;Polarization:Vertical

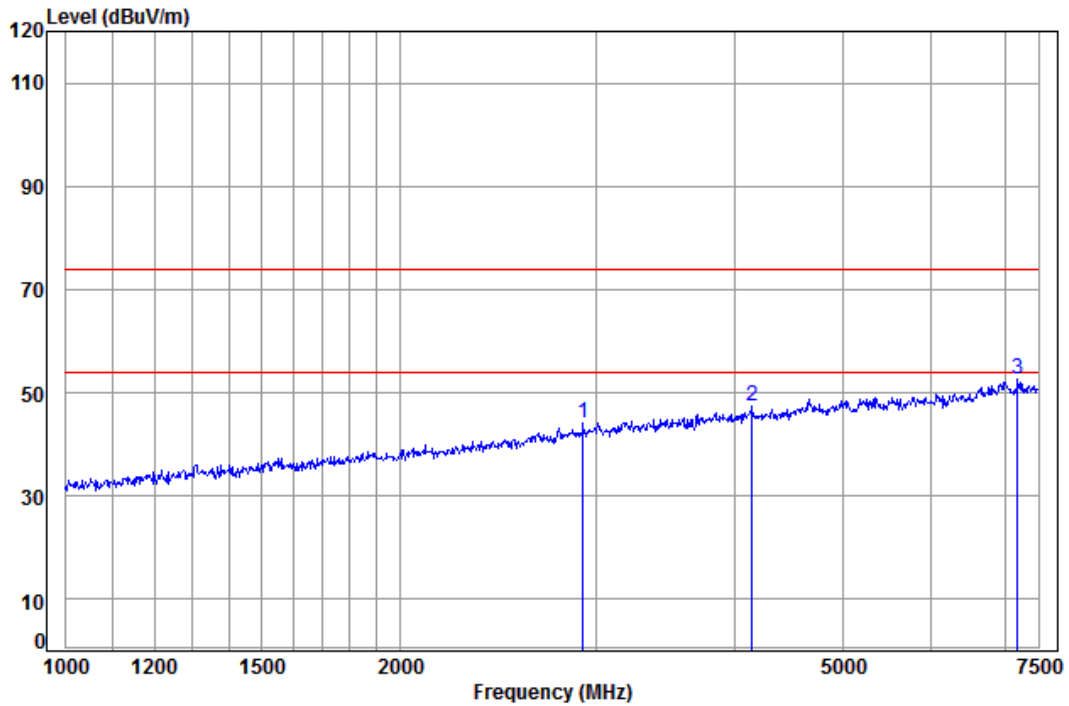

Condition: 3m Vertical


Job No: : 5519RG

Mode: : b

		Cable	Ant	Preamp	Read	Limit	Over	
	Freq	Loss	Factor	Factor	Level	Line	Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1	2921.007	5.86	31.02	38.19	45.58	44.27	74.00	-29.73 Peak
2	4147.565	6.88	33.60	38.76	45.62	47.34	74.00	-26.66 Peak
3	pp 7189.273	9.64	36.42	38.20	44.89	52.75	74.00	-21.25 Peak



Mode:c;Polarization:Horizontal

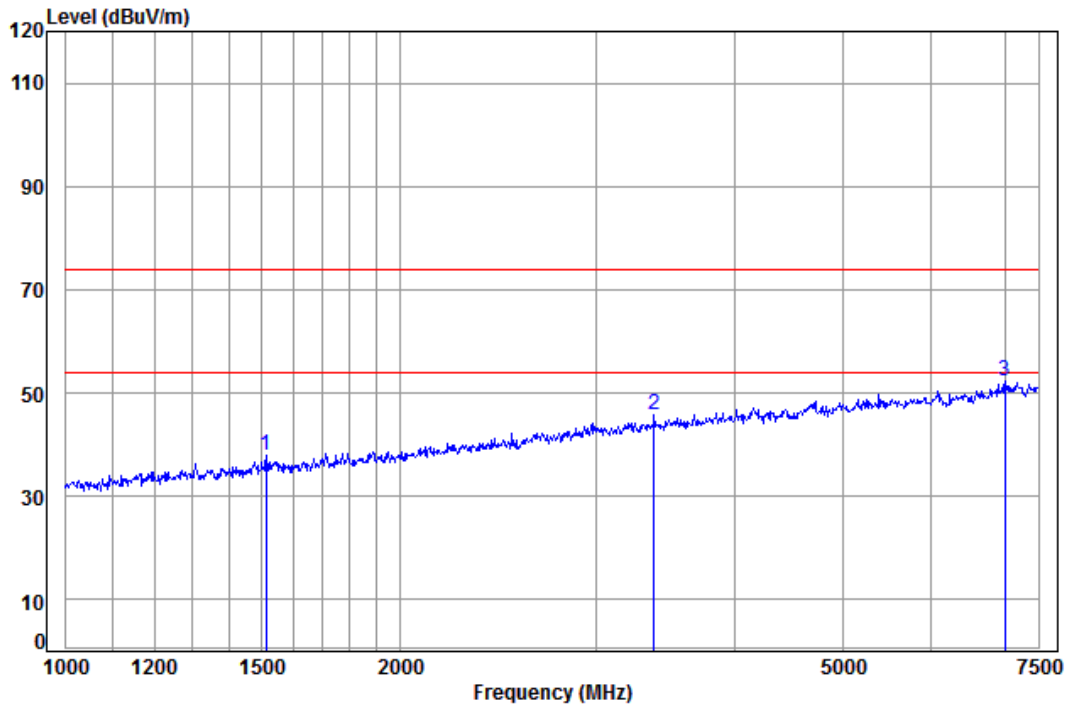

Condition: 3m Horizontal

Job No: : 5519RG

Mode: : c

		Cable	Ant	Preamp	Read	Limit	Over	
	Freq	Loss	Factor	Factor	Level	Line	Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1	1514.477	4.49	25.87	38.06	45.73	38.03	74.00	-35.97 Peak
2	3383.857	6.22	32.00	38.41	45.98	45.79	74.00	-28.21 Peak
3 pp	7003.404	9.51	36.50	38.40	44.66	52.27	74.00	-21.73 Peak




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM160700551903

Page: 54 of 67

Mode:c;Polarization:Vertical

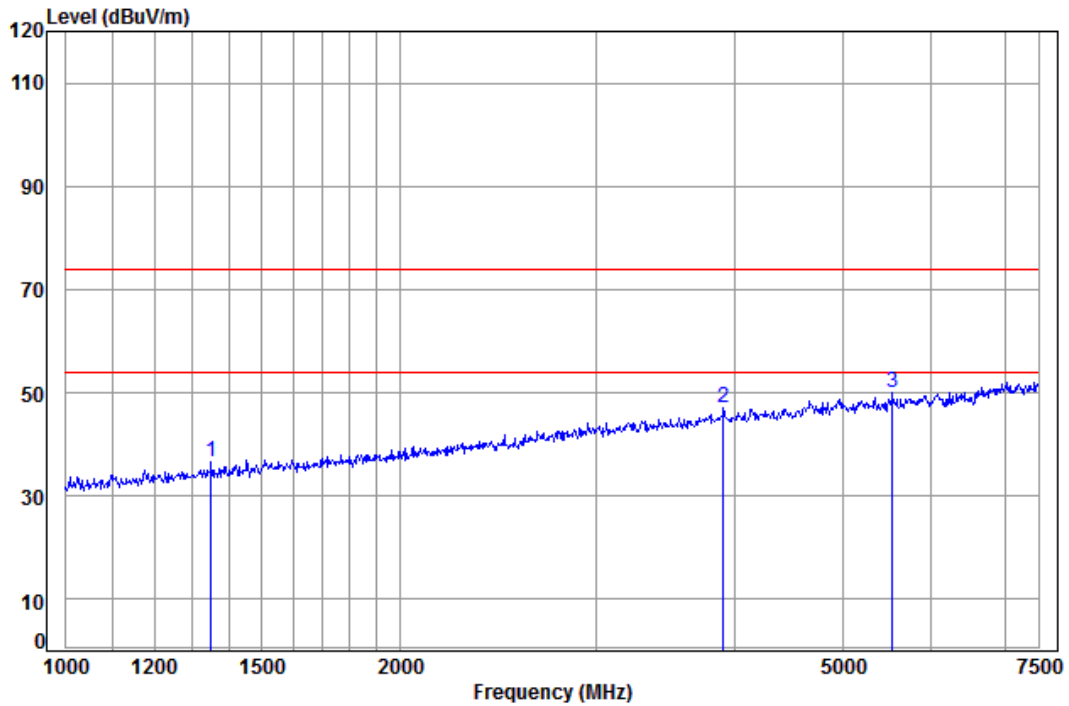

Condition: 3m Vertical


Job No: : 5519RG

Mode: : c

		Cable	Ant	Preamp	Read	Limit	Over	
	Freq	Loss	Factor	Factor	Level	Line	Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1	1350.156	4.29	25.18	38.04	45.31	36.74	74.00	-37.26 Peak
2	3904.284	6.63	33.35	38.66	45.66	46.98	74.00	-27.02 Peak
3 pp	5543.730	8.30	34.43	39.04	46.46	50.15	74.00	-23.85 Peak



Mode:d;Polarization:Horizontal

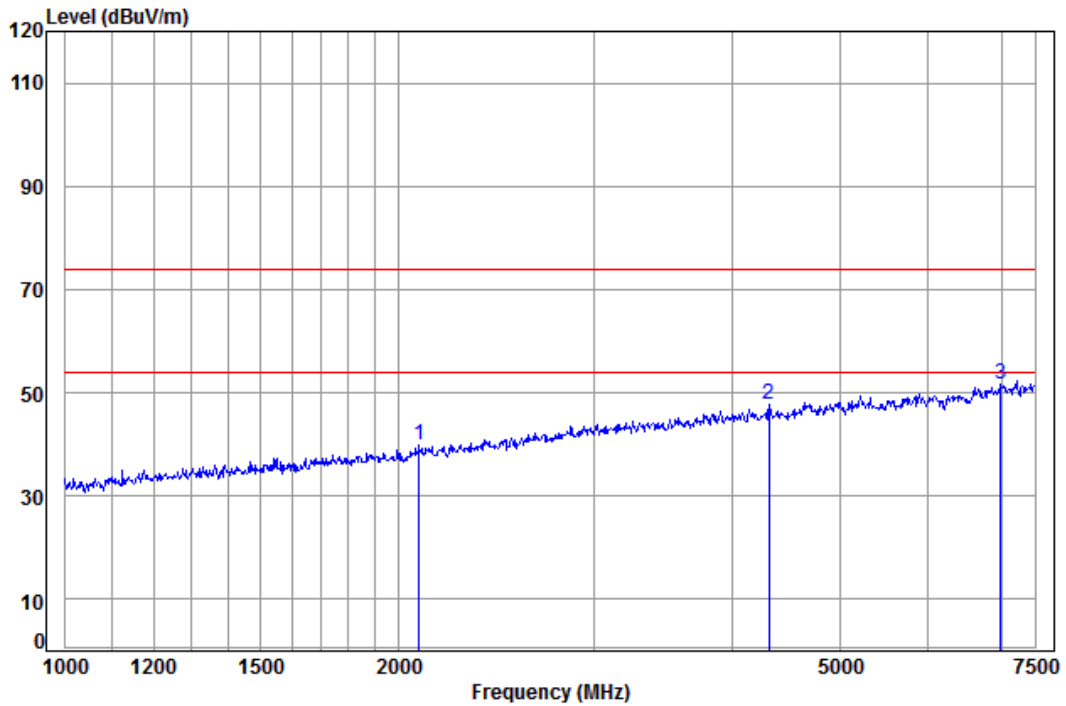

Condition: 3m Horizontal

Job No: : 5519RG

Mode: : d

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	2086.399	5.09	28.10	38.11	44.75	39.83	74.00	-34.17	Peak
2	4318.118	7.08	33.60	38.84	45.85	47.69	74.00	-26.31	Peak
3	pp 6989.307	9.50	36.47	38.41	44.20	51.76	74.00	-22.24	Peak




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM160700551903

Page: 56 of 67

Mode:d;Polarization:Vertical

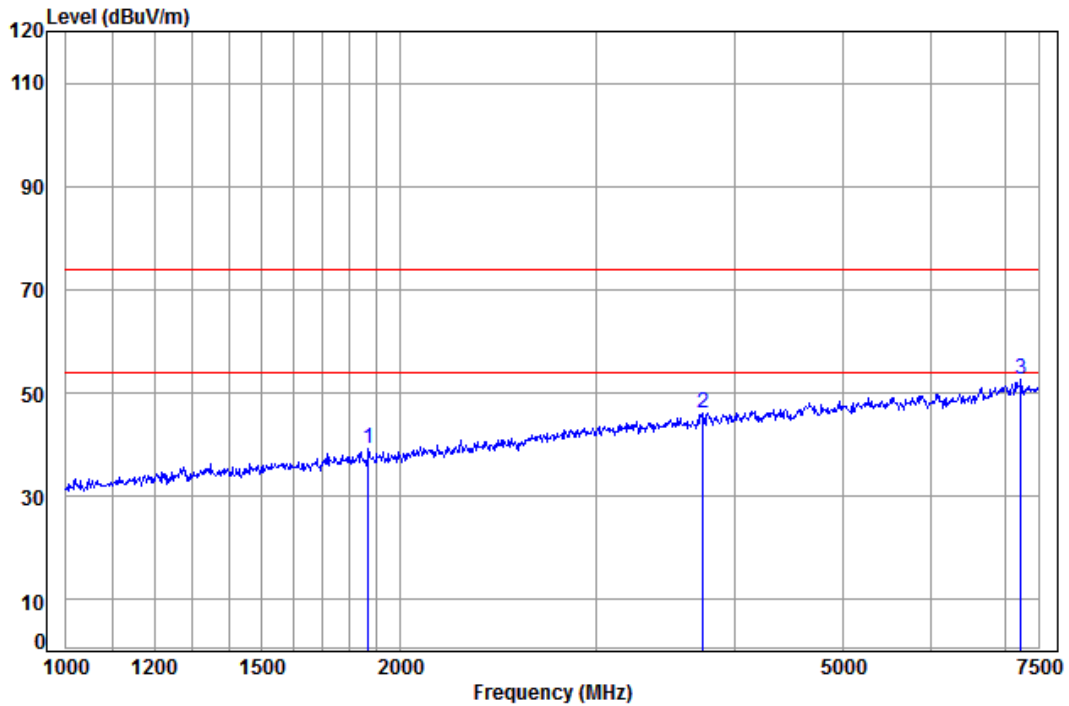

Condition: 3m Vertical

Job No: : 5519RG

Mode: : d

		Cable	Ant	Preamp	Read		Limit	Over	
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1871.303	4.89	27.34	38.09	45.06	39.20	74.00	-34.80	Peak
2	3742.529	6.50	32.90	38.58	45.21	46.03	74.00	-27.97	Peak
3 pp	7232.862	9.67	36.41	38.15	44.62	52.55	74.00	-21.45	Peak




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM160700551903

Page: 57 of 67

Mode:e;Polarization:Horizontal

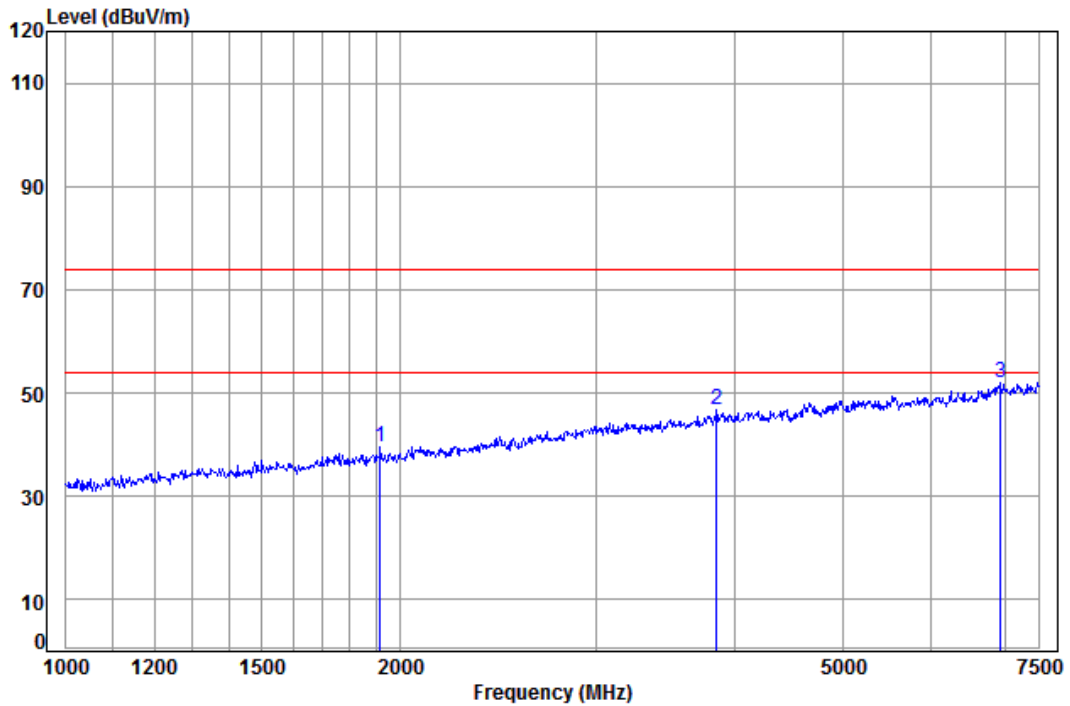

Condition: 3m Horizontal

Job No: : 5519RG

Mode: : e

		Cable	Ant	Preamp	Read		Limit	Over	
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1917.100	4.93	27.51	38.09	45.24	39.59	74.00	-34.41	Peak
2	3849.603	6.59	33.20	38.63	45.73	46.89	74.00	-27.11	Peak
3	pp 6933.202	9.45	36.32	38.44	44.72	52.05	74.00	-21.95	Peak




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM160700551903

Page: 58 of 67

Mode:e;Polarization:Vertical

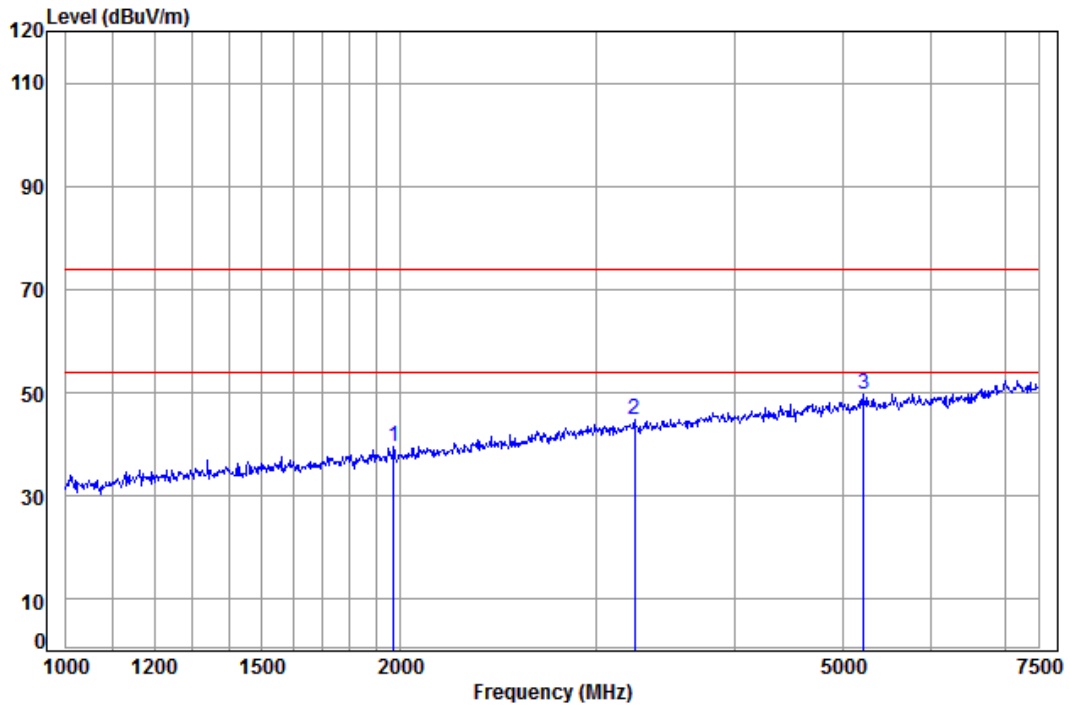

Condition: 3m Vertical

Job No: : 5519RG

Mode: : e

		Cable	Ant	Preamp	Read		Limit	Over	
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1971.949	4.98	27.70	38.10	45.12	39.70	74.00	-34.30	Peak
2	3250.206	6.12	31.77	38.34	45.22	44.77	74.00	-29.23	Peak
3	5218.555	8.11	34.46	39.08	46.08	49.57	74.00	-24.43	Peak




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM160700551903

Page: 59 of 67

B78004G3203630 & Battery (HB3080G1EBC)

Mode:e;Polarization:Horizontal

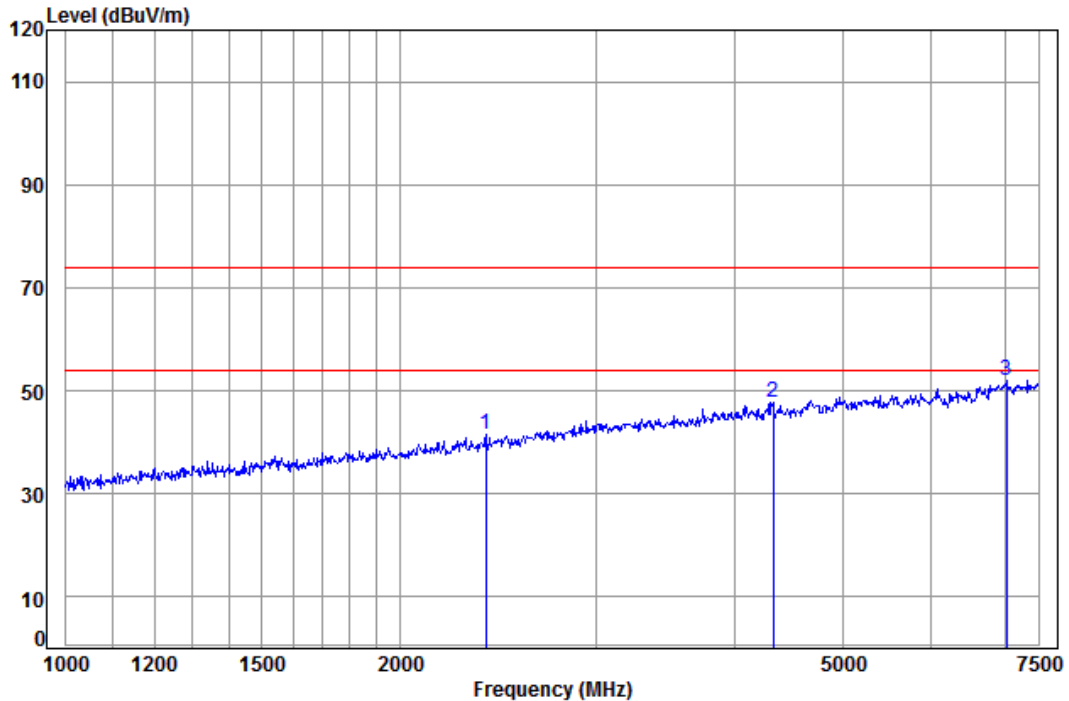

Condition: 3m Horizontal

Job No: : 5519RG

Mode: : e

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	2387.957	5.34	29.07	38.14	45.41	41.68	74.00	-32.32	Peak
2	4326.827	7.09	33.60	38.84	46.00	47.85	74.00	-26.15	Peak
3 pp	7017.529	9.52	36.49	38.38	44.25	51.88	74.00	-22.12	Peak




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM160700551903

Page: 60 of 67

Mode:e;Polarization:Vertical

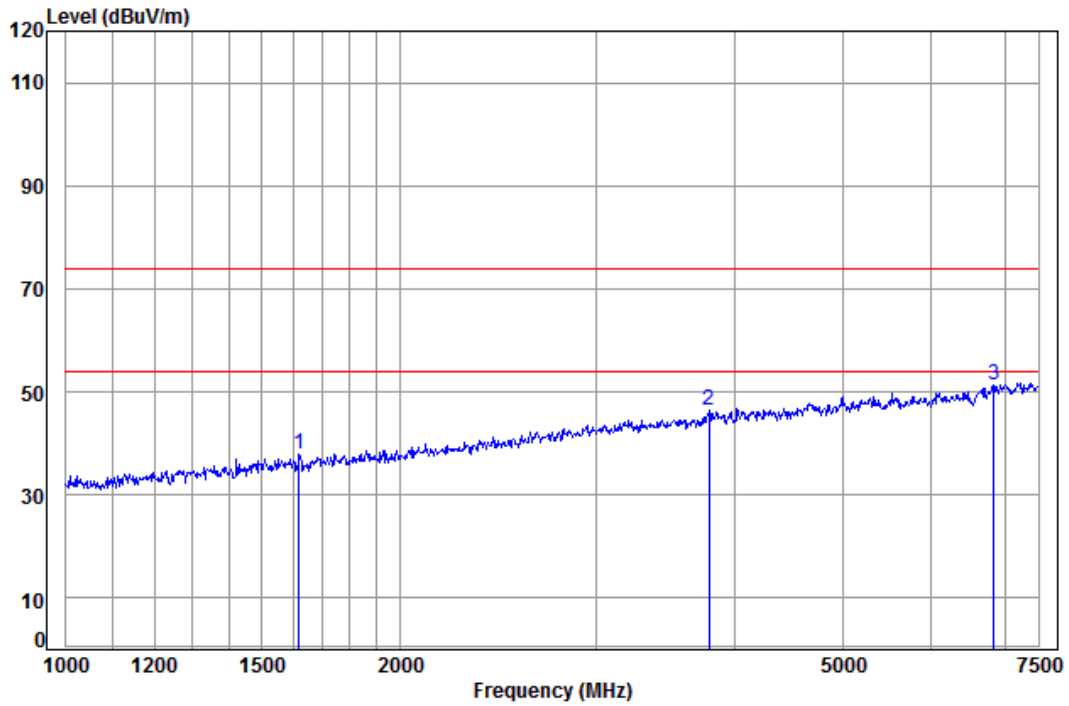

Condition: 3m Vertical


Job No: : 5519RG

Mode: : e

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1621.865	4.62	26.34	38.07	45.02	37.91	74.00	-36.09	Peak
2	3788.048	6.54	33.03	38.61	45.49	46.45	74.00	-27.55	Peak
3 pp	6836.101	9.37	36.05	38.49	44.36	51.29	74.00	-22.71	Peak



H780K1G3X00570
Mode:e;Polarization:Horizontal

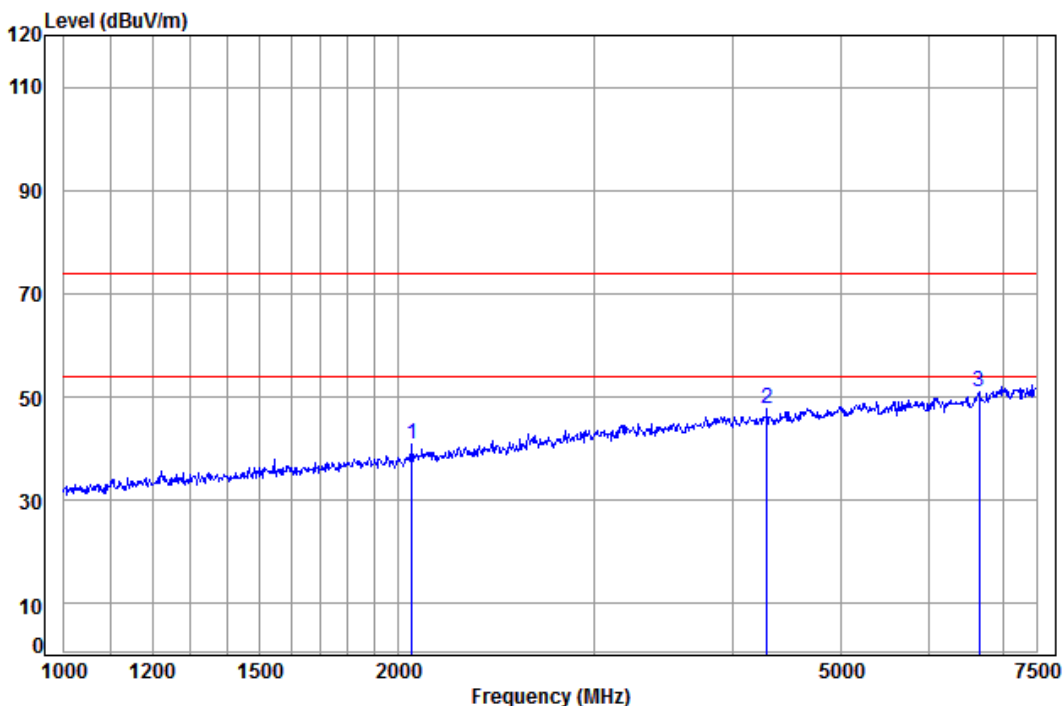


Condition: 3m Horizontal
Job No: : 5519RG
Mode: : e

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	2057.178	5.06	28.00	38.11	46.05	41.00	74.00	-33.00	Peak
2	4292.095	7.05	33.60	38.83	45.82	47.64	74.00	-26.36	Peak
3 pp	6659.362	9.21	35.56	38.59	44.74	50.92	74.00	-23.08	Peak



Mode:e;Polarization:Vertical

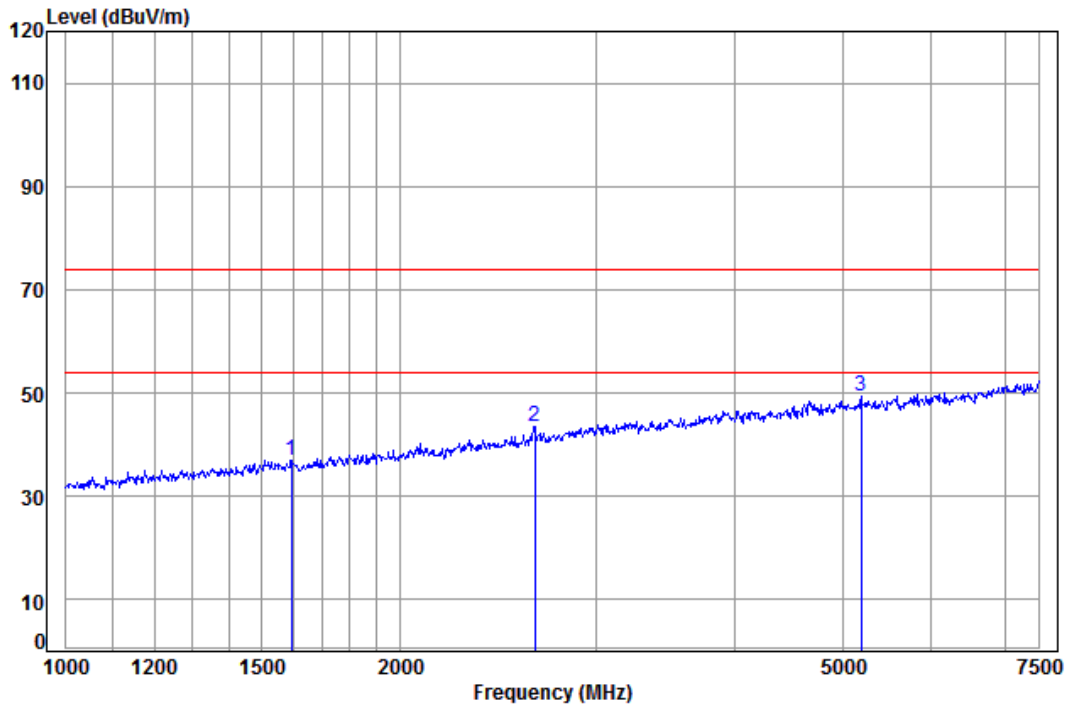

Condition: 3m Vertical

Job No: : 5519RG

Mode: : e

		Cable	Ant	Preamp	Read		Limit	Over	
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1595.931	4.59	26.23	38.07	44.19	36.94	74.00	-37.06	Peak
2	2641.068	5.57	29.97	38.17	46.09	43.46	74.00	-30.54	Peak
3	5197.567	8.10	34.46	39.08	45.98	49.46	74.00	-24.54	Peak




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM160700551903

Page: 63 of 67

P78015G3W10751

Mode:e;Polarization:Horizontal

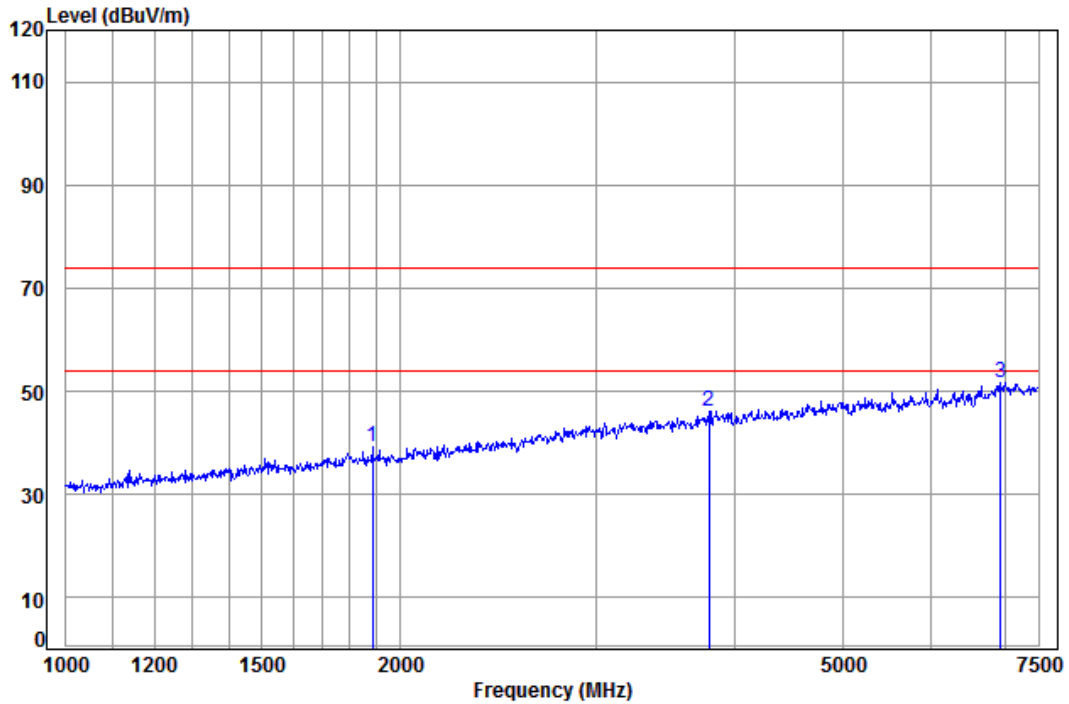

Condition: 3m Horizontal

Job No: : 5519RG

Mode: : e

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1886.446	4.90	27.39	38.09	45.00	39.20	74.00	-34.80	Peak
2	3788.048	6.54	33.03	38.61	45.11	46.07	74.00	-27.93	Peak
3 pp	6933.202	9.45	36.32	38.44	44.47	51.80	74.00	-22.20	Peak




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM160700551903

Page: 64 of 67

Mode:e;Polarization:Vertical

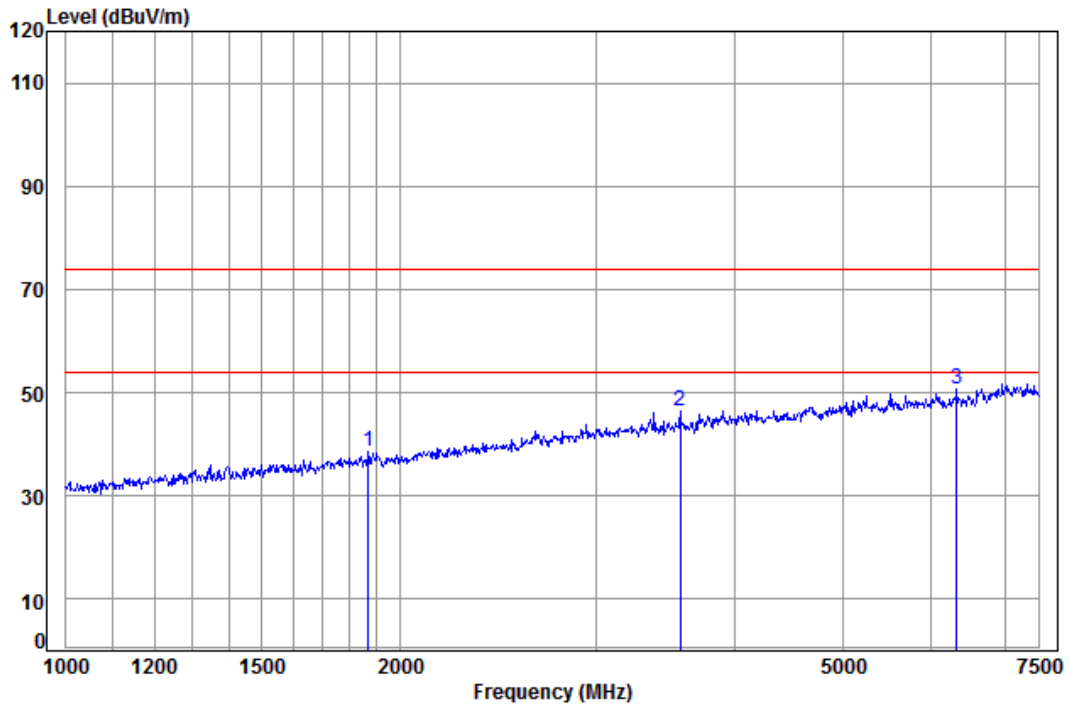

Condition: 3m Vertical

Job No: : 5519RG


Mode: : e

		Cable	Ant	Preamp	Read		Limit	Over	
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1871.303	4.89	27.34	38.09	44.41	38.55	74.00	-35.45	Peak
2	3573.047	6.36	32.42	38.50	46.17	46.45	74.00	-27.55	Peak
3 pp	6332.222	8.96	34.97	38.79	45.60	50.74	74.00	-23.26	Peak



PC mode

Mode:f;Polarization:Horizontal

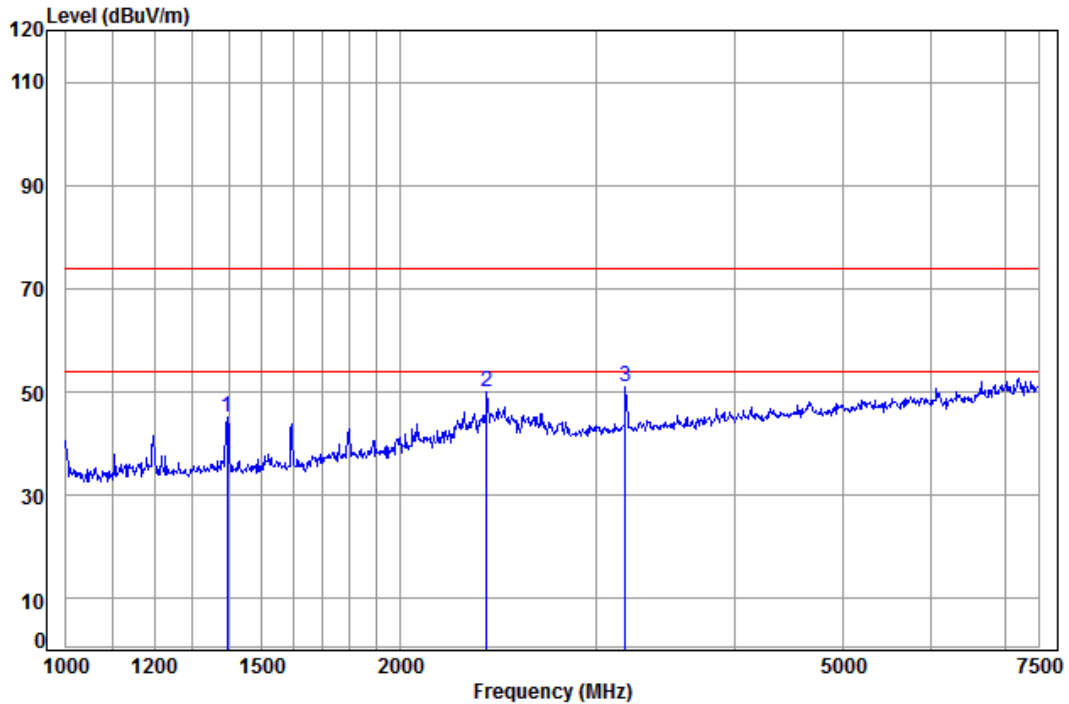

Condition: 3m Horizontal


Job No: : 5519RG

Mode: : f

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1397.205	4.35	25.38	38.05	53.51	45.19	74.00	-28.81	Peak
2	2392.773	5.34	29.09	38.14	53.65	49.94	74.00	-24.06	Peak
3 pp	3185.373	6.07	31.65	38.30	51.60	51.02	74.00	-22.98	Peak



Mode:f;Polarization:Vertical

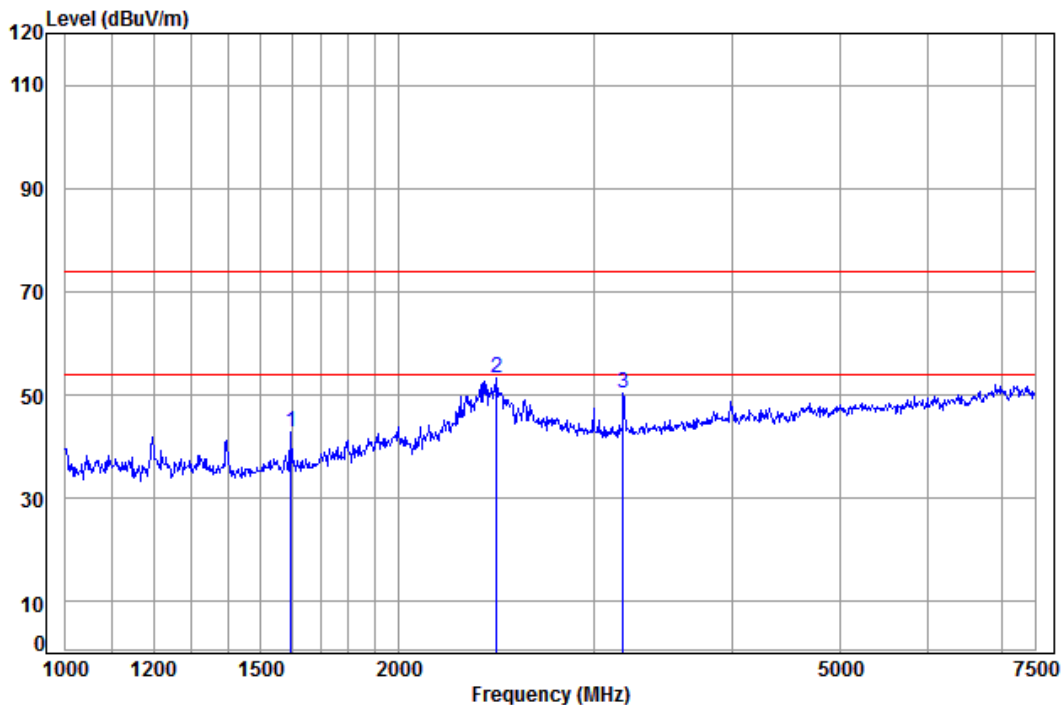

Condition: 3m Vertical

Job No: : 5519RG

Mode: : f

		Cable	Ant	Preamp	Read		Limit	Over	
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1599.150	4.59	26.24	38.07	49.94	42.70	74.00	-31.30	Peak
2	pp 2451.333	5.38	29.26	38.15	56.77	53.26	74.00	-20.74	Peak
3	3185.373	6.07	31.65	38.30	51.03	50.45	74.00	-23.55	Peak



7 Photographs - EUT Test Setup

Refer to Appendix A - Photographs of EUT Setup for SZEM1607005519RG.