

**Appendix B. SAR Measurement Plots**

Table of contents
GSM850 Head (Second Antenna)
GSM850 Body (Second Antenna)
GSM1900 Head (Second Antenna)
GSM1900 Body (Second Antenna)
UMTS Band II Head (Second Antenna)
UMTS Band II Body (Second Antenna)
UMTS Band IV Head (Second Antenna)
UMTS Band IV Body (Second Antenna)
UMTS Band V Head (Second Antenna)
UMTS Band V Body (Second Antenna)
LTE Band II Head (Second Antenna)
LTE Band II Body (Second Antenna)
LTE Band IV Head (Second Antenna)
LTE Band IV Body (Second Antenna)
LTE Band V Head (Second Antenna)
LTE Band V Body (Second Antenna)
LTE Band VII Head (Second Antenna)
LTE Band VII Body (Second Antenna)
LTE Band XII Head (Second Antenna)
LTE Band XII Body (Second Antenna)
LTE Band XXVI Head (Second Antenna)
LTE Band XXVI Body (Second Antenna)
LTE Band XLI Head (Second Antenna)
LTE Band XLI Body (Second Antenna)
GSM850 Head (Main Antenna)
GSM850 Body (Main Antenna)
GSM1900 Head (Main Antenna)
GSM1900 Body (Main Antenna)
UMTS Band II Head (Main Antenna)
UMTS Band II Body (Main Antenna)
UMTS Band IV Head (Main Antenna)
UMTS Band IV Body (Main Antenna)
UMTS Band V Head (Main Antenna)

UMTS Band V Body (Main Antenna)
LTE Band II Head (Main Antenna)
LTE Band II Body (Main Antenna)
LTE Band IV Head (Main Antenna)
LTE Band IV Body (Main Antenna)
LTE Band V Head (Main Antenna)
LTE Band V Body (Main Antenna)
LTE Band VII Head (Main Antenna)
LTE Band VII Body (Main Antenna)
LTE Band XII Head (Main Antenna)
LTE Band XII Body (Main Antenna)
LTE Band XXVI Head (Main Antenna)
LTE Band XXVI Body (Main Antenna)
LTE Band XLI Head (Main Antenna)
LTE Band XLI Body (Main Antenna)
WiFi 2.4G Head
WiFi 2.4G Body
WiFi 5G Head
WiFi 5G Body

Test Laboratory: HUAWEI SAR/HAC Lab

LON-L29 GSM850 190CH Right touch with Battery 2-Second Antenna

DUT: LON-L29; Type: Smart Phone; Serial: SAR1

Communication System: UID 0, HW-GSM\GPRS\EGPRS-1TS (0); Frequency: 836.6 MHz; Duty Cycle: 1:8.30042

Medium parameters used: $f = 837$ MHz; $\sigma = 0.906$ S/m; $\epsilon_r = 41.639$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY Configuration:

- ε Probe: EX3DV4 - SN3736; ConvF(9.17, 9.17, 9.17); Calibrated: 2016-4-26;
- ε Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- ε Electronics: DAE4 Sn852; Calibrated: 2016-4-20
- ε Phantom: SAM1; Type: SAM; Serial: TP-1475
- ε DASY52 52.8.8(1258); SEMCAD X 14.6.10(7331)

Configuration/Head/Area Scan (8x6x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 1.51 W/kg


Configuration/Head/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 23.68 V/m; Power Drift = -0.09 dB

Peak SAR (extrapolated) = 3.05 W/kg

SAR(1 g) = 1.23 W/kg; SAR(10 g) = 0.638 W/kg

Maximum value of SAR (measured) = 2.16 W/kg

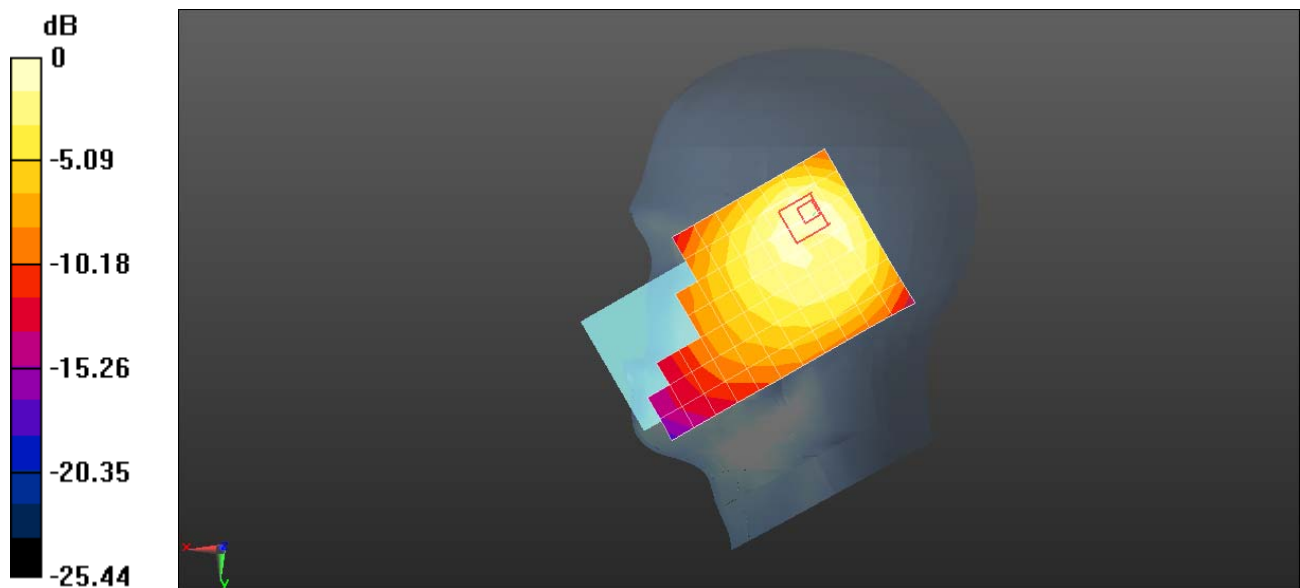

Test Laboratory: HUAWEI SAR/HAC Lab

LON-L29 GSM850 190CH Back Side 15mm with Battery 2-Second Antenna

DUT: LON-L29; Type: Smart Phone; Serial: SAR1

Communication System: UID 0, HW-GSM\GPRS\EGPRS-1TS (0); Frequency: 836.6 MHz; Duty Cycle: 1:8.30042

Medium parameters used: $f = 837 \text{ MHz}$; $\sigma = 1.006 \text{ S/m}$; $\epsilon_r = 53.907$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY Configuration:

- ε Probe: EX3DV4 - SN3736; ConvF(9.08, 9.08, 9.08); Calibrated: 2016-4-26;
- ε Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- ε Electronics: DAE4 Sn852; Calibrated: 2016-4-20
- ε Phantom: SAM2; Type: SAM; Serial: TP:1474
- ε DASY52 52.8.8(1258); SEMCAD X 14.6.10(7331)

Configuration/Body/Area Scan (8x13x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (measured) = 0.264 W/kg

Configuration/Body/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 13.44 V/m; Power Drift = 0.04 dB

Peak SAR (extrapolated) = 0.290 W/kg

SAR(1 g) = 0.214 W/kg; SAR(10 g) = 0.154 W/kg

Maximum value of SAR (measured) = 0.262 W/kg



Configuration/Body/Zoom Scan (5x5x7)/Cube 1: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 13.44 V/m; Power Drift = 0.04 dB

Peak SAR (extrapolated) = 0.302 W/kg

SAR(1 g) = 0.180 W/kg; SAR(10 g) = 0.106 W/kg

Maximum value of SAR (measured) = 0.258 W/kg

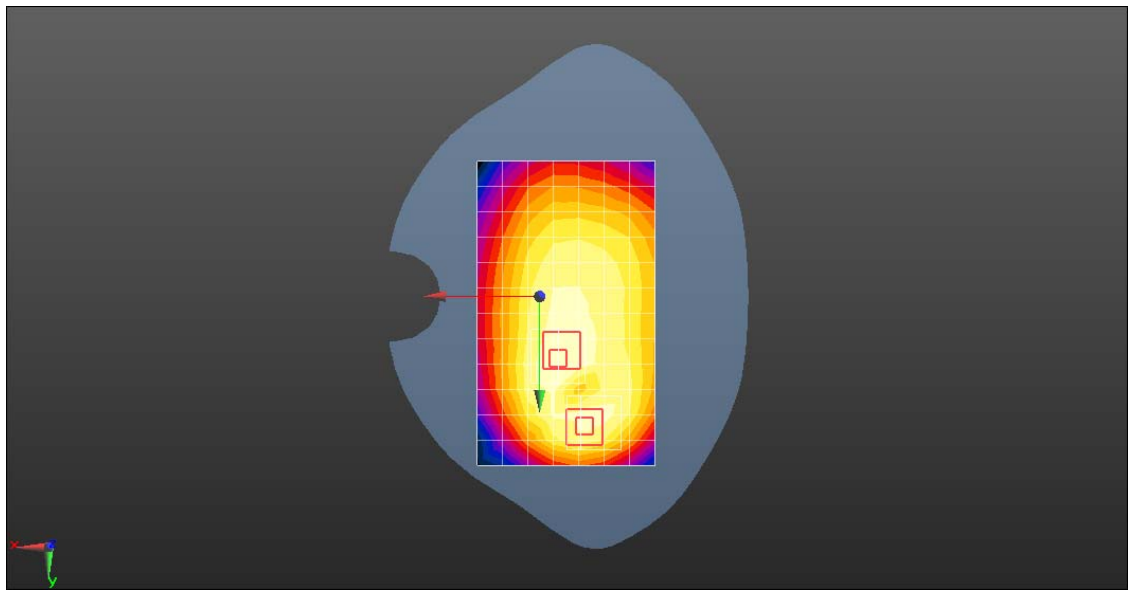

0 dB = 0.264 W/kg = -5.78 dBW/kg

Test Laboratory: HUAWEI SAR/HAC Lab

LON-L29 GSM850 GPRS 2TS 190CH Back Side 10mm with Battery 2-Second Antenna

DUT: LON-L29; Type: Smart Phone; Serial: SAR1

Communication System: UID 0, HW-GSM\GPRS\EGPRS-2TS (0); Frequency: 836.6 MHz; Duty Cycle: 1:4.10015

Medium parameters used: $f = 837 \text{ MHz}$; $\sigma = 1.006 \text{ S/m}$; $\epsilon_r = 53.907$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY Configuration:

- ε Probe: EX3DV4 - SN3736; ConvF(9.08, 9.08, 9.08); Calibrated: 2016-4-26;
- ε Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- ε Electronics: DAE4 Sn852; Calibrated: 2016-4-20
- ε Phantom: SAM2; Type: SAM; Serial: TP:1474
- ε DASY52 52.8.8(1258); SEMCAD X 14.6.10(7331)

Configuration/Body/Area Scan (8x13x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (measured) = 0.800 W/kg

Configuration/Body/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 17.57 V/m ; Power Drift = -0.05 dB

Peak SAR (extrapolated) = 1.16 W/kg

SAR(1 g) = 0.643 W/kg ; SAR(10 g) = 0.356 W/kg

Maximum value of SAR (measured) = 0.972 W/kg



Configuration/Body/Zoom Scan (5x5x7)/Cube 1: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 17.57 V/m ; Power Drift = -0.05 dB

Peak SAR (extrapolated) = 0.746 W/kg

SAR(1 g) = 0.528 W/kg ; SAR(10 g) = 0.360 W/kg

Maximum value of SAR (measured) = 0.650 W/kg

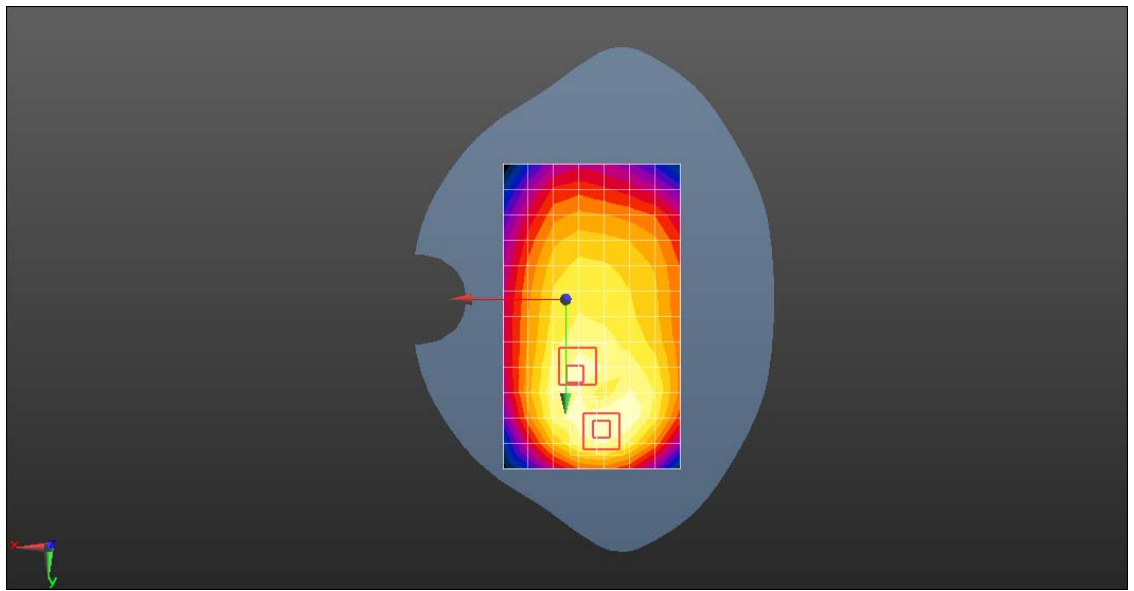

0 dB = 0.800 W/kg = -0.97 dBW/kg

Test Laboratory: HUAWEI SAR/HAC Lab

LON-L29 GSM1900 810CH Right touch-Second Antenna

DUT: LON-L29; Type: Smart Phone; Serial: SAR2

Communication System: UID 0, HW-GSM\GPRS\EGPRS-1TS (0); Frequency: 1909.8 MHz; Duty Cycle: 1:8.30042

Medium parameters used: $f = 1910$ MHz; $\sigma = 1.422$ S/m; $\epsilon_r = 39.623$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY Configuration:

- ε Probe: EX3DV4 - SN3744; ConvF(7.74, 7.74, 7.74); Calibrated: 2016-7-26;
- ε Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- ε Electronics: DAE4 Sn1236; Calibrated: 2015-11-23
- ε Phantom: SAM4; Type: SAM; Serial: TP-1620
- ε DASY52 52.8.8(1258); SEMCAD X 14.6.10(7331)

Configuration/Head/Area Scan (8x13x1): Measurement grid: $dx=15$ mm, $dy=15$ mm


Maximum value of SAR (measured) = 1.47 W/kg

Configuration/Head/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 17.74 V/m; Power Drift = -0.12 dB

Peak SAR (extrapolated) = 2.20 W/kg

SAR(1 g) = 1.03 W/kg; SAR(10 g) = 0.582 W/kg

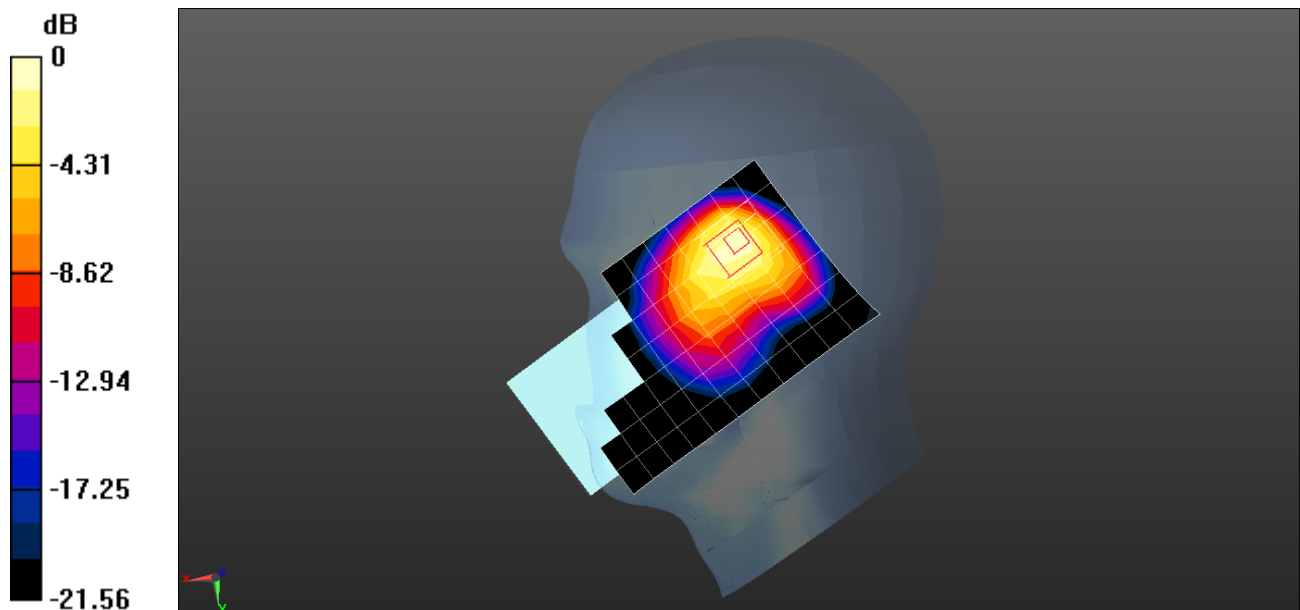

0 dB = 1.47 W/kg = 1.67 dBW/kg

Test Laboratory: HUAWEI SAR/HAC Lab

LON-L29 GSM1900 661CH Back Side 15mm-Second Antenna

DUT: LON-L29; Type: Smart Phone; Serial: SAR2

Communication System: UID 0, HW-GSM\GPRS\EGPRS-1TS (0); Frequency: 1880 MHz; Duty Cycle: 1:8.30042

Medium parameters used: $f = 1880 \text{ MHz}$; $\sigma = 1.492 \text{ S/m}$; $\epsilon_r = 52.053$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY Configuration:

- ε Probe: EX3DV4 - SN3744; ConvF(7.48, 7.48, 7.48); Calibrated: 2016-7-26;
- ε Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- ε Electronics: DAE4 Sn1236; Calibrated: 2015-11-23
- ε Phantom: SAM3; Type: SAM; Serial: TP-1597
- ε DASY52 52.8.8(1258); SEMCAD X 14.6.10(7331)

Configuration/Body/Area Scan (8x14x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (measured) = 0.0886 W/kg

Configuration/Body/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 3.938 V/m; Power Drift = -0.07 dB

Peak SAR (extrapolated) = 0.121 W/kg

SAR(1 g) = 0.073 W/kg; SAR(10 g) = 0.042 W/kg

Maximum value of SAR (measured) = 0.100 W/kg


Configuration/Body/Zoom Scan (5x5x7)/Cube 1: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 3.938 V/m; Power Drift = -0.07 dB

Peak SAR (extrapolated) = 0.103 W/kg

SAR(1 g) = 0.067 W/kg; SAR(10 g) = 0.043 W/kg

Maximum value of SAR (measured) = 0.0893 W/kg

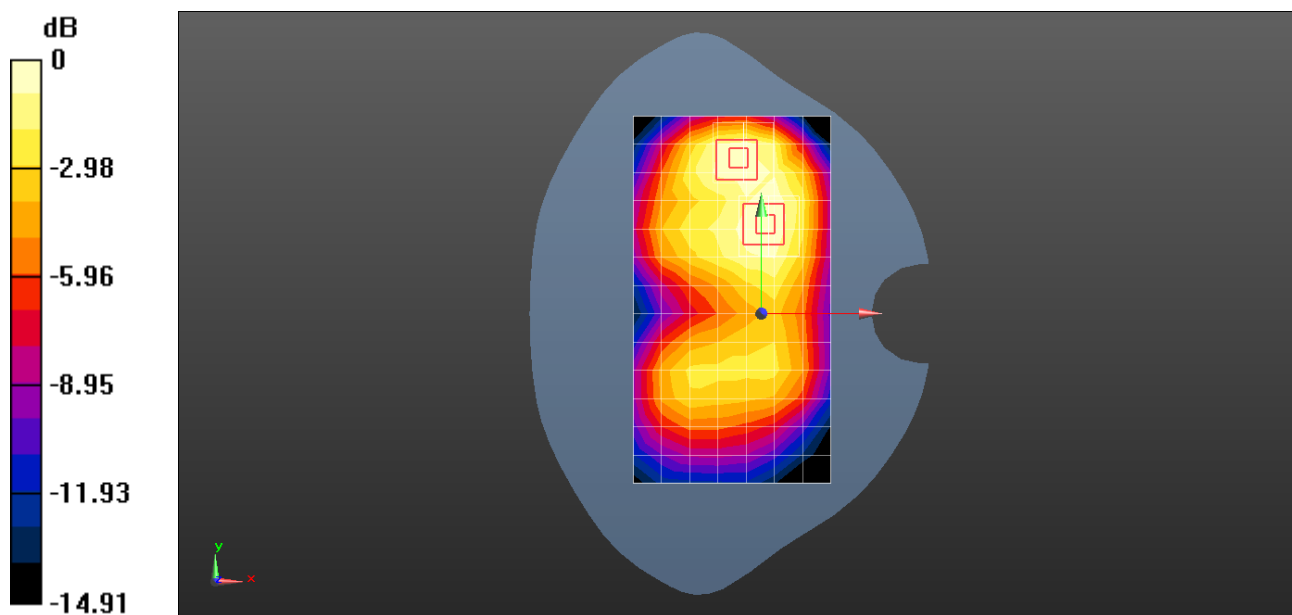

Test Laboratory: HUAWEI SAR/HAC Lab

LON-L29 GSM1900 GPRS 2TS 661CH Top Side 10mm-Second Antenna

DUT: LON-L29; Type: Smart Phone; Serial: SAR2

Communication System: UID 0, HW-GSM\GPRS\EGPRS-2TS (0); Frequency: 1880 MHz; Duty Cycle: 1:4.10015

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.492$ S/m; $\epsilon_r = 52.053$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- ε Probe: EX3DV4 - SN3744; ConvF(7.48, 7.48, 7.48); Calibrated: 2016-7-26;
- ε Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- ε Electronics: DAE4 Sn1236; Calibrated: 2015-11-23
- ε Phantom: SAM3; Type: SAM; Serial: TP-1597
- ε DASY52 52.8.8(1258); SEMCAD X 14.6.10(7331)

Configuration/Body/Area Scan (5x9x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 0.200 W/kg


Configuration/Body/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 9.536 V/m; Power Drift = 0.14 dB

Peak SAR (extrapolated) = 0.358 W/kg

SAR(1 g) = 0.196 W/kg; SAR(10 g) = 0.103 W/kg

Maximum value of SAR (measured) = 0.296 W/kg

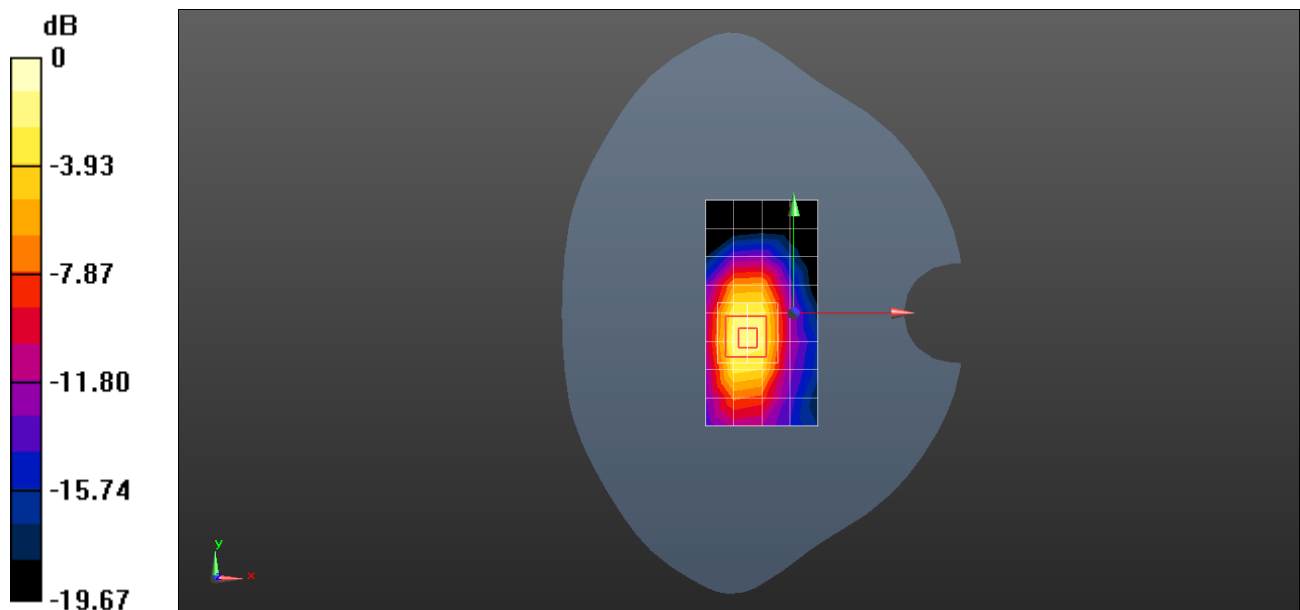

0 dB = 0.296 W/kg = -5.29 dBW/kg

Test Laboratory: HUAWEI SAR/HAC Lab

LON-L29 UMTS Band II 9538CH Right touch with Battery 2-Second Antenna-Repeated

DUT: LON-L29; Type: Smart Phone; Serial: SAR2

Communication System: UID 0, HW-UMTS-FDD(WCDMA) (0); Frequency: 1907.6 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1908$ MHz; $\sigma = 1.42$ S/m; $\epsilon_r = 39.631$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY Configuration:

- ε Probe: EX3DV4 - SN3744; ConvF(7.74, 7.74, 7.74); Calibrated: 2016-7-26;
- ε Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- ε Electronics: DAE4 Sn1236; Calibrated: 2015-11-23
- ε Phantom: SAM4; Type: SAM; Serial: TP-1620
- ε DASY52 52.8.8(1258); SEMCAD X 14.6.10(7331)

Configuration/Head/Area Scan (8x13x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 1.68 W/kg


Configuration/Head/Zoom Scan (5x6x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 17.91 V/m; Power Drift = -0.01 dB

Peak SAR (extrapolated) = 2.63 W/kg

SAR(1 g) = 1.23 W/kg; SAR(10 g) = 0.696 W/kg

Maximum value of SAR (measured) = 1.87 W/kg

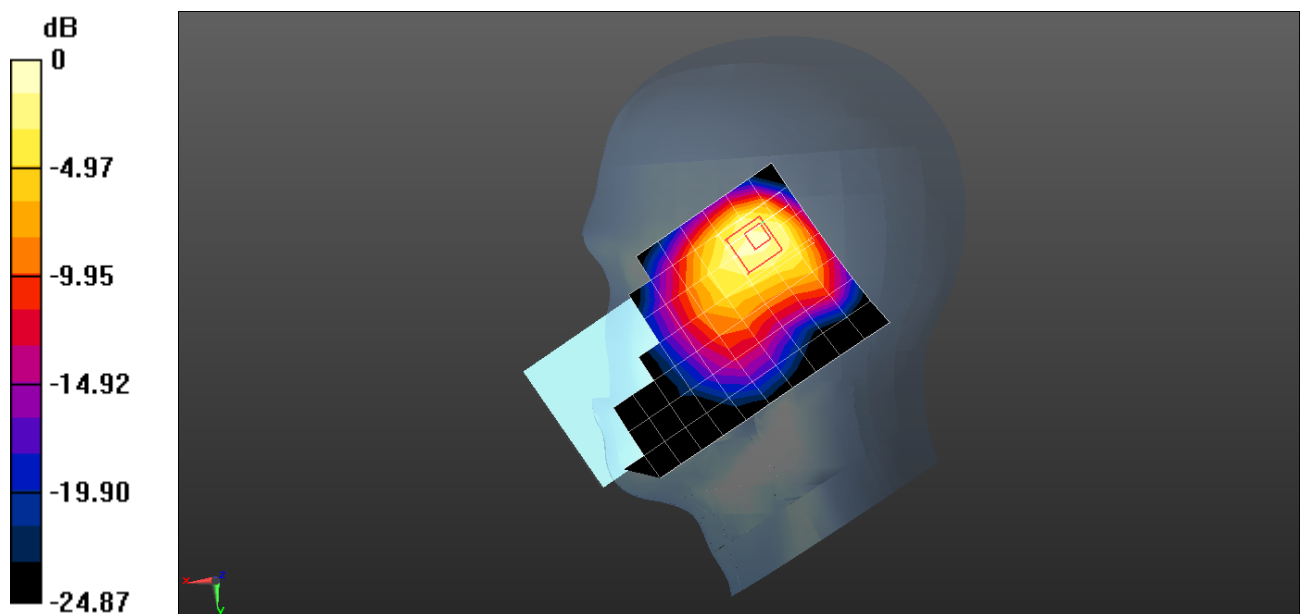

0 dB = 1.87 W/kg = 2.72 dBW/kg

Test Laboratory: HUAWEI SAR/HAC Lab

LON-L29 UMTS Band II 9400CH Back Side 15mm-Second Antenna

DUT: LON-L29; Type: Smart Phone; Serial: SAR2

Communication System: UID 0, HW-UMTS-FDD(WCDMA) (0); Frequency: 1880 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.492$ S/m; $\epsilon_r = 52.053$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- ε Probe: EX3DV4 - SN3744; ConvF(7.48, 7.48, 7.48); Calibrated: 2016-7-26;
- ε Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- ε Electronics: DAE4 Sn1236; Calibrated: 2015-11-23
- ε Phantom: SAM3; Type: SAM; Serial: TP-1597
- ε DASY52 52.8.8(1258); SEMCAD X 14.6.10(7331)

Configuration/Body/Area Scan (8x14x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 0.116 W/kg

Configuration/Body/Zoom Scan (6x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 4.133 V/m; Power Drift = -0.10 dB

Peak SAR (extrapolated) = 0.142 W/kg

SAR(1 g) = 0.086 W/kg; SAR(10 g) = 0.050 W/kg

Maximum value of SAR (measured) = 0.122 W/kg



Configuration/Body/Zoom Scan (6x5x7)/Cube 1: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 4.133 V/m; Power Drift = -0.10 dB

Peak SAR (extrapolated) = 0.125 W/kg

SAR(1 g) = 0.082 W/kg; SAR(10 g) = 0.053 W/kg

Maximum value of SAR (measured) = 0.110 W/kg

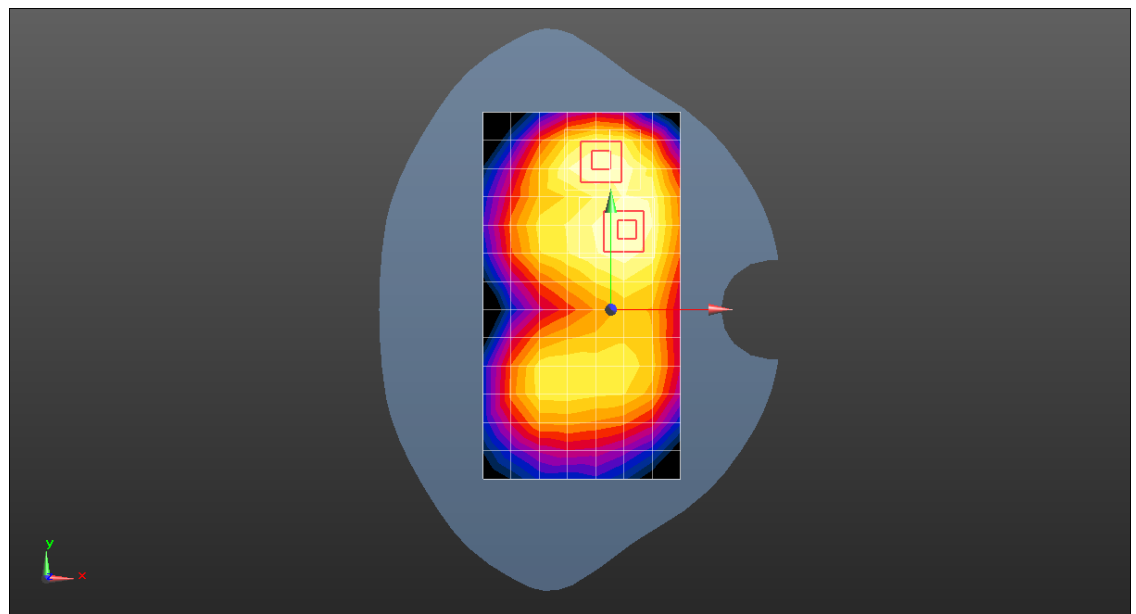

0 dB = 0.110 W/kg = -9.59 dBW/kg

Test Laboratory: HUAWEI SAR/HAC Lab

LON-L29 UMTS Band II 9400CH Top Side 10mm with Battery 2-Second Antenna

DUT: LON-L29; Type: Smart Phone; Serial: SAR2

Communication System: UID 0, HW-UMTS-FDD(WCDMA) (0); Frequency: 1880 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.492$ S/m; $\epsilon_r = 52.053$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- ε Probe: EX3DV4 - SN3744; ConvF(7.48, 7.48, 7.48); Calibrated: 2016-7-26;
- ε Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- ε Electronics: DAE4 Sn1236; Calibrated: 2015-11-23
- ε Phantom: SAM3; Type: SAM; Serial: TP-1597
- ε DASY52 52.8.8(1258); SEMCAD X 14.6.10(7331)

Configuration/Body/Area Scan (5x9x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 0.368 W/kg


Configuration/Body/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 13.43 V/m; Power Drift = 0.05 dB

Peak SAR (extrapolated) = 0.459 W/kg

SAR(1 g) = 0.253 W/kg; SAR(10 g) = 0.134 W/kg

Maximum value of SAR (measured) = 0.386 W/kg

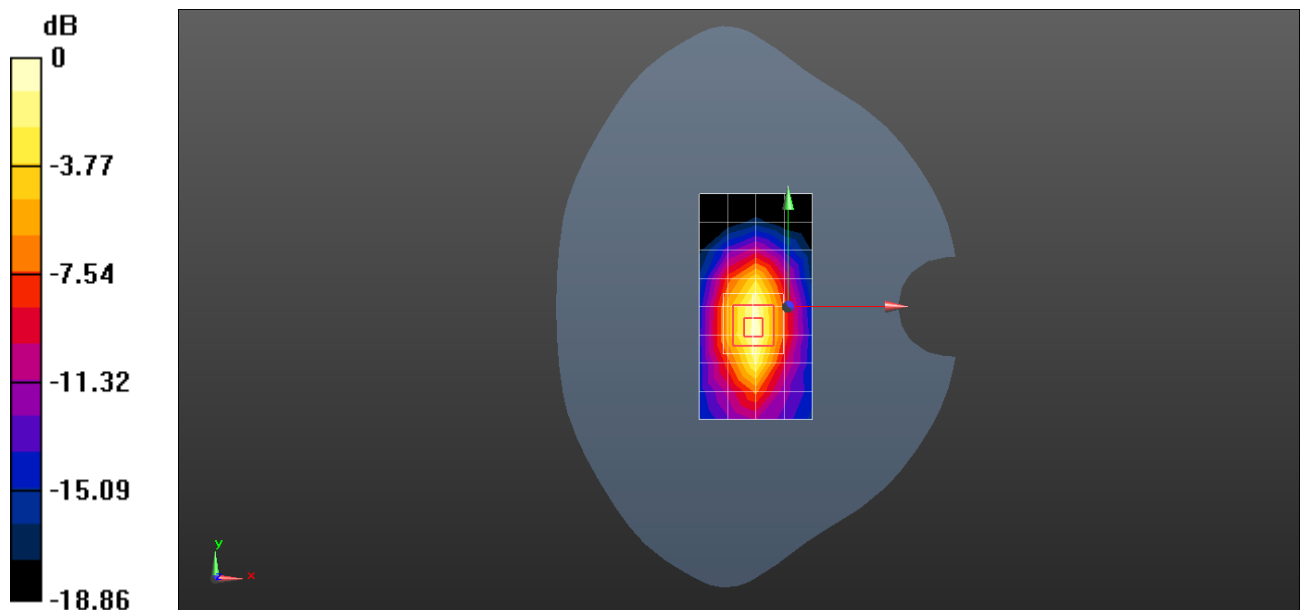

0 dB = 0.386 W/kg = -4.13 dBW/kg

Test Laboratory: HUAWEI SAR/HAC Lab

LON-L29 UMTS Band IV 1513CH Right touch with Battery 2-Second Antenna-Repeated

DUT: LON-L29; Type: Smart Phone; Serial: SAR2

Communication System: UID 0, HW-UMTS-FDD(WCDMA) (0); Frequency: 1752.6 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1753$ MHz; $\sigma = 1.359$ S/m; $\epsilon_r = 39.495$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY Configuration:

- ε Probe: EX3DV4 - SN3744; ConvF(8.09, 8.09, 8.09); Calibrated: 2016-7-26;
- ε Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- ε Electronics: DAE4 Sn1236; Calibrated: 2015-11-23
- ε Phantom: SAM4; Type: SAM; Serial: TP-1620
- ε DASY52 52.8.8(1258); SEMCAD X 14.6.10(7331)

Configuration/Head/Area Scan (8x13x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 1.87 W/kg


Configuration/Head/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 19.70 V/m; Power Drift = 0.03 dB

Peak SAR (extrapolated) = 3.06 W/kg

SAR(1 g) = 1.28 W/kg; SAR(10 g) = 0.696 W/kg

Maximum value of SAR (measured) = 2.06 W/kg

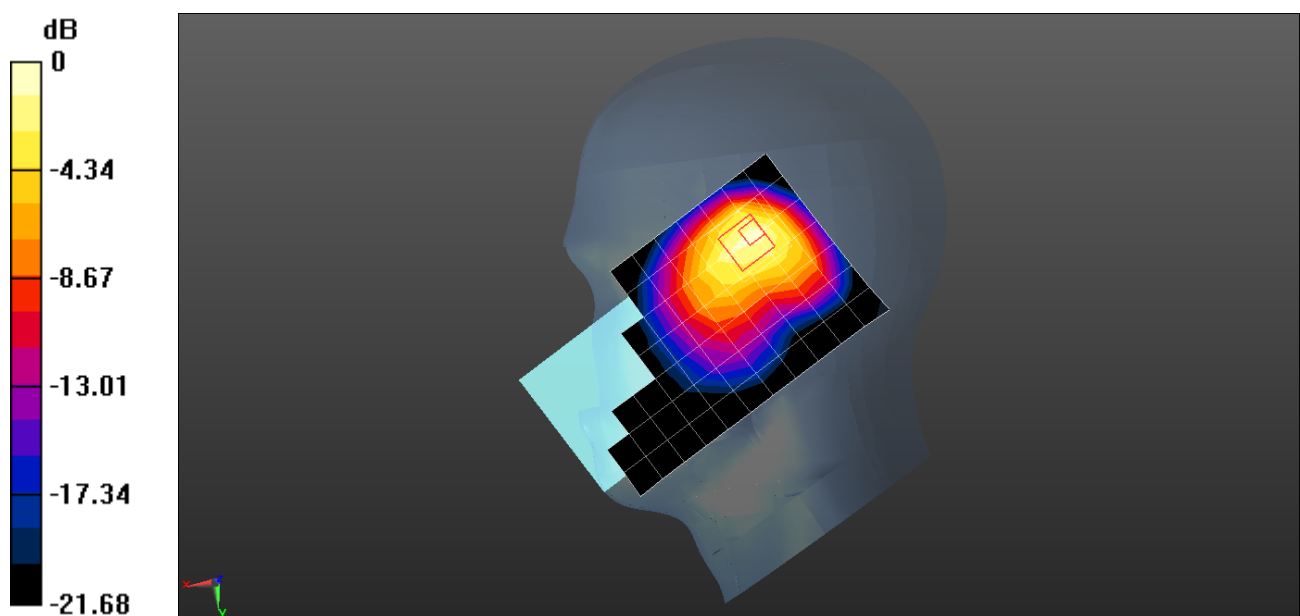

0 dB = 2.06 W/kg = 3.14 dBW/kg

Test Laboratory: HUAWEI SAR/HAC Lab

LON-L29 UMTS Band IV 1413CH Back Side 15mm-Second Antenna

DUT: LON-L29; Type: Smart Phone; Serial: SAR2

Communication System: UID 0, HW-UMTS-FDD(WCDMA) (0); Frequency: 1732.6 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1733$ MHz; $\sigma = 1.414$ S/m; $\epsilon_r = 53.819$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- ε Probe: EX3DV4 - SN3744; ConvF(7.61, 7.61, 7.61); Calibrated: 2016-7-26;
- ε Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- ε Electronics: DAE4 Sn1236; Calibrated: 2015-11-23
- ε Phantom: SAM3; Type: SAM; Serial: TP-1597
- ε DASY52 52.8.8(1258); SEMCAD X 14.6.10(7331)

Configuration/Body/Area Scan (8x14x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 0.144 W/kg


Configuration/Body/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 4.852 V/m; Power Drift = 0.12 dB

Peak SAR (extrapolated) = 0.205 W/kg

SAR(1 g) = 0.127 W/kg; SAR(10 g) = 0.073 W/kg

Maximum value of SAR (measured) = 0.178 W/kg

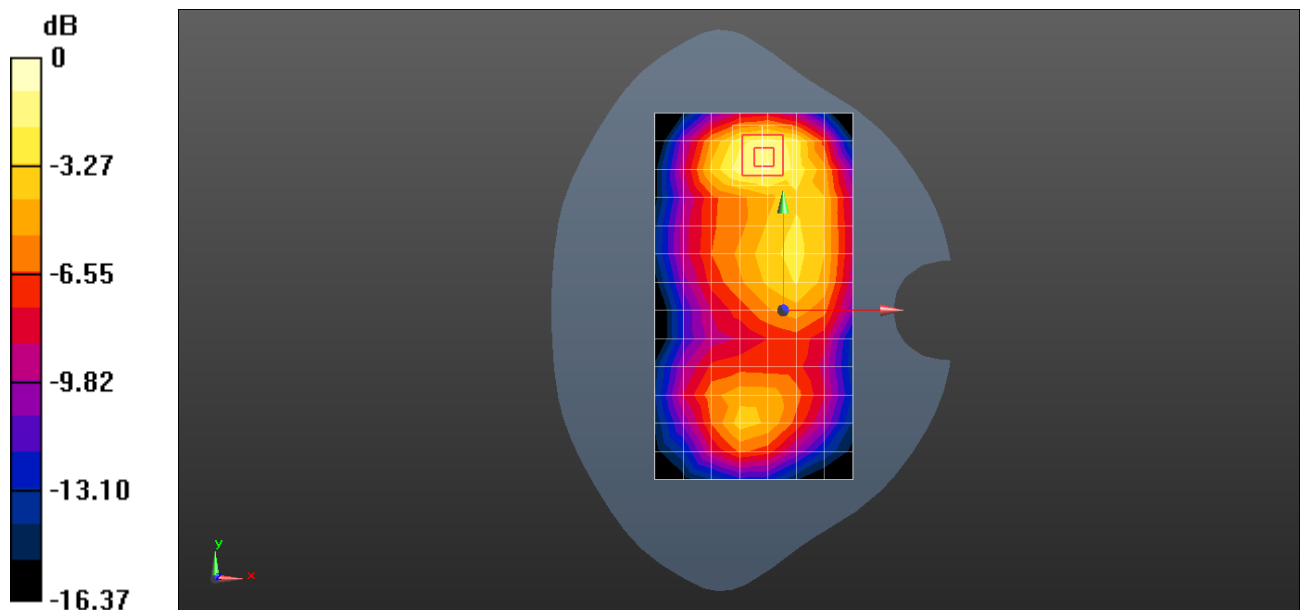

Test Laboratory: HUAWEI SAR/HAC Lab

LON-L29 UMTS Band IV 1413CH Top Side 10mm with Battery 3-Second Antenna

DUT: LON-L29; Type: Smart Phone; Serial: SAR2

Communication System: UID 0, HW-UMTS-FDD(WCDMA) (0); Frequency: 1732.6 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1733$ MHz; $\sigma = 1.414$ S/m; $\epsilon_r = 53.819$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- ε Probe: EX3DV4 - SN3744; ConvF(7.61, 7.61, 7.61); Calibrated: 2016-7-26;
- ε Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- ε Electronics: DAE4 Sn1236; Calibrated: 2015-11-23
- ε Phantom: SAM3; Type: SAM; Serial: TP-1597
- ε DASY52 52.8.8(1258); SEMCAD X 14.6.10(7331)

Configuration/Body/Area Scan (5x9x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 0.446 W/kg


Configuration/Body/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 14.89 V/m; Power Drift = 0.11 dB

Peak SAR (extrapolated) = 0.571 W/kg

SAR(1 g) = 0.328 W/kg; SAR(10 g) = 0.177 W/kg

Maximum value of SAR (measured) = 0.485 W/kg

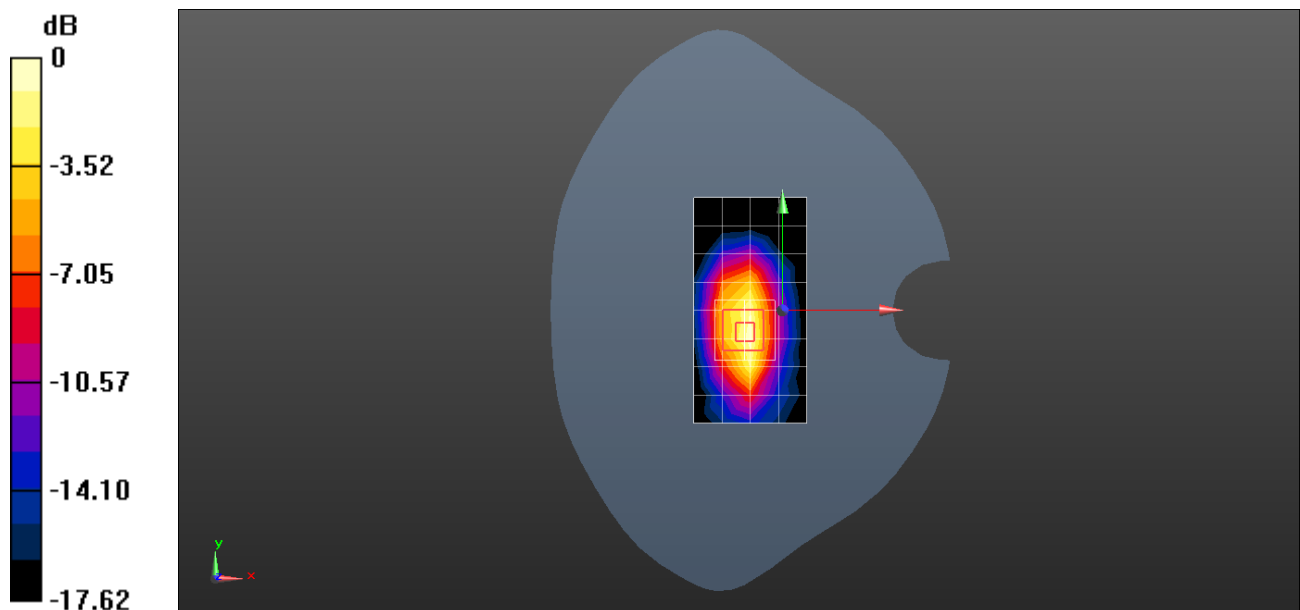

0 dB = 0.485 W/kg = -3.14 dBW/kg

Test Laboratory: HUAWEI SAR/HAC Lab

LON-L29 UMTS Band V 4182CH Right touch with Battery 2-Second Antenna

DUT: LON-L29; Type: Smart Phone; Serial: SAR1

Communication System: UID 0, HW-UMTS-FDD(WCDMA) (0); Frequency: 836.4 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 836.4$ MHz; $\sigma = 0.905$ S/m; $\epsilon_r = 41.546$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY Configuration:

- ε Probe: EX3DV4 - SN3736; ConvF(9.17, 9.17, 9.17); Calibrated: 2016-4-26;
- ε Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- ε Electronics: DAE4 Sn852; Calibrated: 2016-4-20
- ε Phantom: SAM1; Type: SAM; Serial: TP-1475
- ε DASY52 52.8.8(1258); SEMCAD X 14.6.10(7331)

Configuration/Head/Area Scan (8x13x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 1.68 W/kg

Configuration/Head/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm


Reference Value = 21.88 V/m; Power Drift = 0.06 dB

Peak SAR (extrapolated) = 2.89 W/kg

SAR(1 g) = 1.15 W/kg; SAR(10 g) = 0.592 W/kg

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 2.08 W/kg

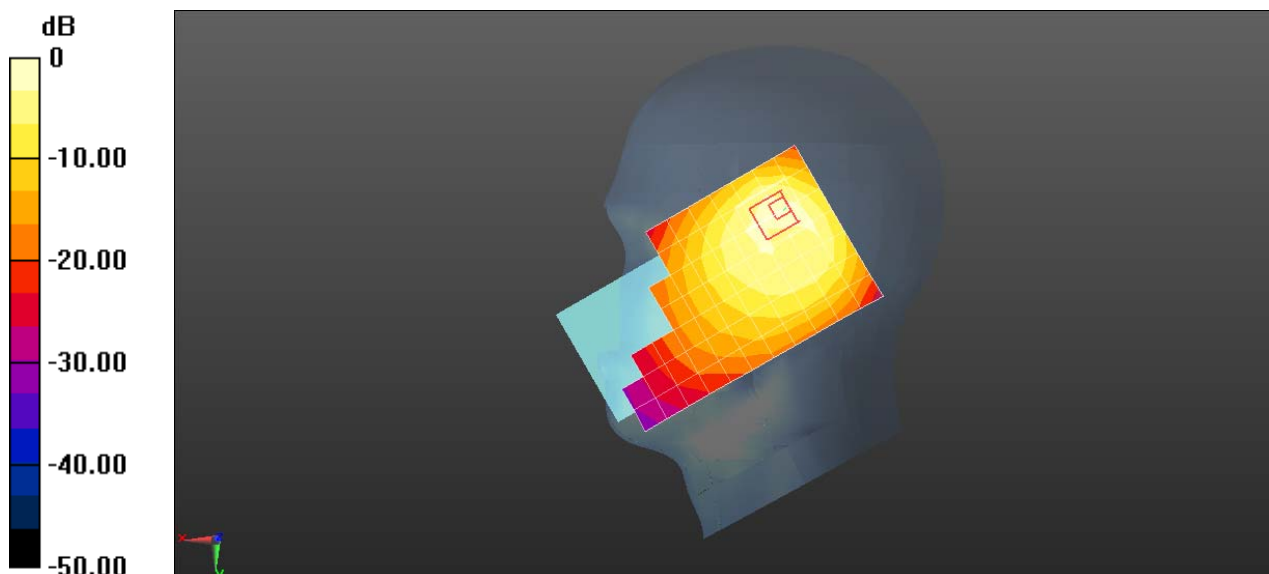

0 dB = 1.68 W/kg = 2.25 dBW/kg

Test Laboratory: HUAWEI SAR/HAC Lab

LON-L29 UMTS Band V 4182CH Back Side 15mm-Second Antenna

DUT: LON-L29; Type: Smart Phone; Serial: SAR1

Communication System: UID 0, HW-UMTS-FDD(WCDMA) (0); Frequency: 836.4 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 836.4$ MHz; $\sigma = 1.005$ S/m; $\epsilon_r = 53.907$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- ε Probe: EX3DV4 - SN3736; ConvF(9.08, 9.08, 9.08); Calibrated: 2016-4-26;
- ε Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- ε Electronics: DAE4 Sn852; Calibrated: 2016-4-20
- ε Phantom: SAM2; Type: SAM; Serial: TP:1474
- ε DASY52 52.8.8(1258); SEMCAD X 14.6.10(7331)

Configuration/Body/Area Scan (8x13x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.225 W/kg

Configuration/Body/Zoom Scan (5x6x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 13.11 V/m; Power Drift = 0.03 dB

Peak SAR (extrapolated) = 0.258 W/kg

SAR(1 g) = 0.194 W/kg; SAR(10 g) = 0.141 W/kg

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.238 W/kg

Configuration/Body/Zoom Scan (5x6x7)/Cube 1: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm



Reference Value = 13.11 V/m; Power Drift = 0.03 dB

Peak SAR (extrapolated) = 0.251 W/kg

SAR(1 g) = 0.153 W/kg; SAR(10 g) = 0.091 W/kg

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.217 W/kg

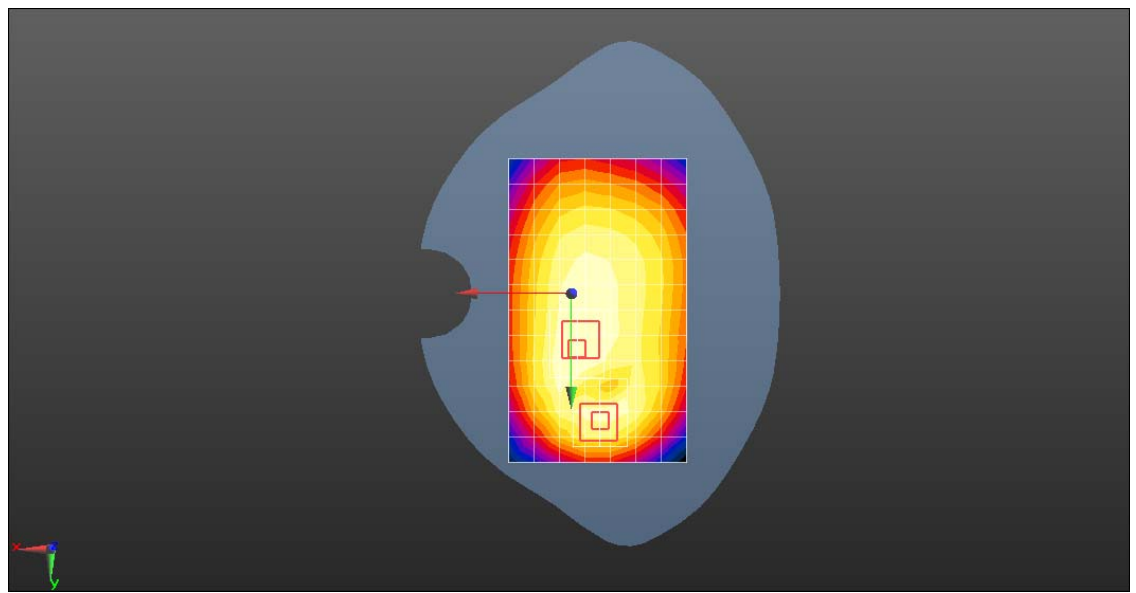

0 dB = 0.225 W/kg = -6.48 dBW/kg

Test Laboratory: HUAWEI SAR/HAC Lab

LON-L29 UMTS Band V 4182CH Back Side 10mm with Battery 2-Second Antenna

DUT: LON-L29; Type: Smart Phone; Serial: SAR1

Communication System: UID 0, HW-UMTS-FDD(WCDMA) (0); Frequency: 836.4 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 836.4$ MHz; $\sigma = 1.005$ S/m; $\epsilon_r = 53.907$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- ε Probe: EX3DV4 - SN3736; ConvF(9.08, 9.08, 9.08); Calibrated: 2016-4-26;
- ε Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- ε Electronics: DAE4 Sn852; Calibrated: 2016-4-20
- ε Phantom: SAM2; Type: SAM; Serial: TP:1474
- ε DASY52 52.8.8(1258); SEMCAD X 14.6.10(7331)

Configuration/Body/Area Scan (8x13x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.488 W/kg

Configuration/Body/Zoom Scan (6x6x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 13.45 V/m; Power Drift = 0.00 dB

Peak SAR (extrapolated) = 0.650 W/kg

SAR(1 g) = 0.357 W/kg; SAR(10 g) = 0.195 W/kg

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.519 W/kg

Configuration/Body/Zoom Scan (6x6x7)/Cube 1: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm



Reference Value = 13.45 V/m; Power Drift = 0.00 dB

Peak SAR (extrapolated) = 0.419 W/kg

SAR(1 g) = 0.297 W/kg; SAR(10 g) = 0.202 W/kg

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.369 W/kg

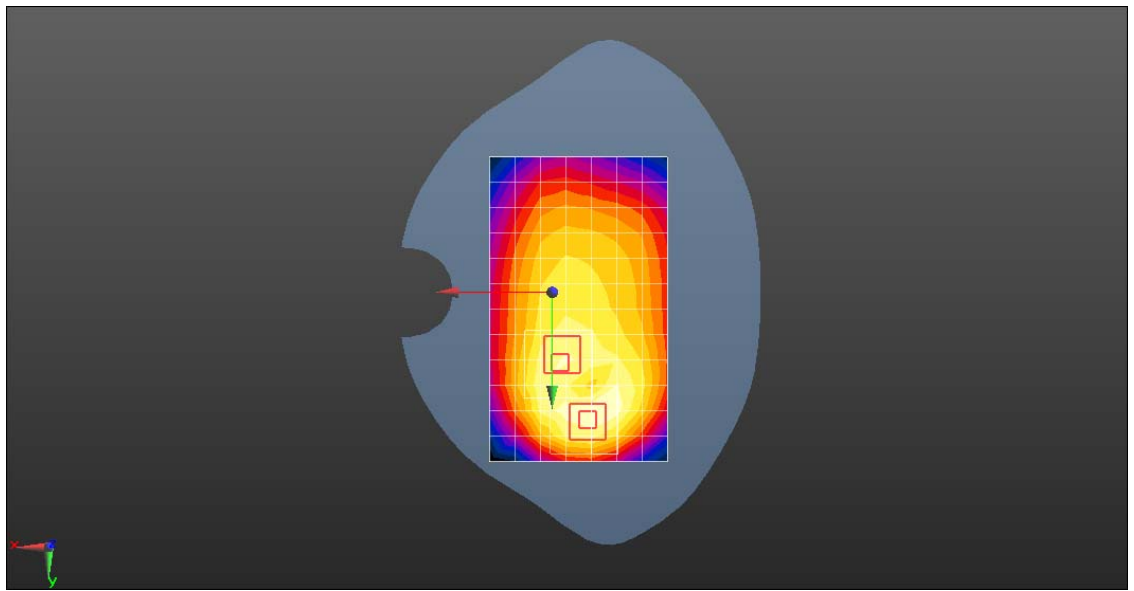

0 dB = 0.488 W/kg = -3.12 dBW/kg

Test Laboratory: HUAWEI SAR/HAC Lab

LON-L29 LTE Band II 20M QPSK 1RB 50 offset 19100CH Right touch-Second Antenna-Repeated

DUT: LON-L29; Type: Smart Phone; Serial: SAR2

Communication System: UID 0, LTE-FDD (SC-FDMA, 20MHz, QPSK/16-QAM) (0); Frequency: 1900 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1900$ MHz; $\sigma = 1.412$ S/m; $\epsilon_r = 39.661$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY Configuration:

- ε Probe: EX3DV4 - SN3744; ConvF(7.74, 7.74, 7.74); Calibrated: 2016-7-26;
- ε Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- ε Electronics: DAE4 Sn1236; Calibrated: 2015-11-23
- ε Phantom: SAM4; Type: SAM; Serial: TP-1620
- ε DASY52 52.8.8(1258); SEMCAD X 14.6.10(7331)

Configuration/Head/Area Scan (8x13x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 1.64 W/kg


Configuration/Head/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 17.91 V/m; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 2.36 W/kg

SAR(1 g) = 1.15 W/kg; SAR(10 g) = 0.665 W/kg

Maximum value of SAR (measured) = 1.67 W/kg

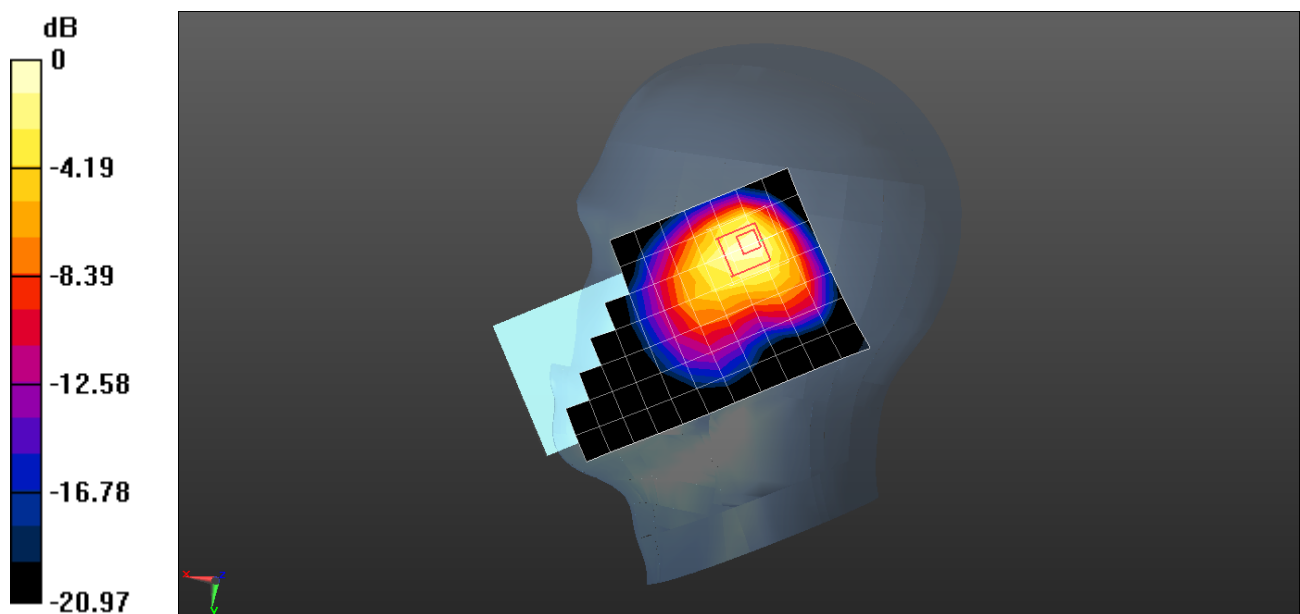

0 dB = 1.67 W/kg = 2.23 dBW/kg

Test Laboratory: HUAWEI SAR/HAC Lab

LON-L29 LTE Band II QPSK 1RB 50 offset 18900CH Back Side 15mm-Second Antenna

DUT: LON-L29; Type: Smart Phone; Serial: SAR2

Communication System: UID 0, LTE-FDD (SC-FDMA, 20MHz, QPSK/16-QAM) (0); Frequency: 1880 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.492$ S/m; $\epsilon_r = 52.053$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- ε Probe: EX3DV4 - SN3744; ConvF(7.48, 7.48, 7.48); Calibrated: 2016-7-26;
- ε Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- ε Electronics: DAE4 Sn1236; Calibrated: 2015-11-23
- ε Phantom: SAM3; Type: SAM; Serial: TP-1597
- ε DASY52 52.8.8(1258); SEMCAD X 14.6.10(7331)

Configuration/Body/Area Scan (8x13x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 0.145 W/kg


Configuration/Body/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 5.200 V/m; Power Drift = -0.10 dB

Peak SAR (extrapolated) = 0.178 W/kg

SAR(1 g) = 0.106 W/kg; SAR(10 g) = 0.060 W/kg

Maximum value of SAR (measured) = 0.144 W/kg

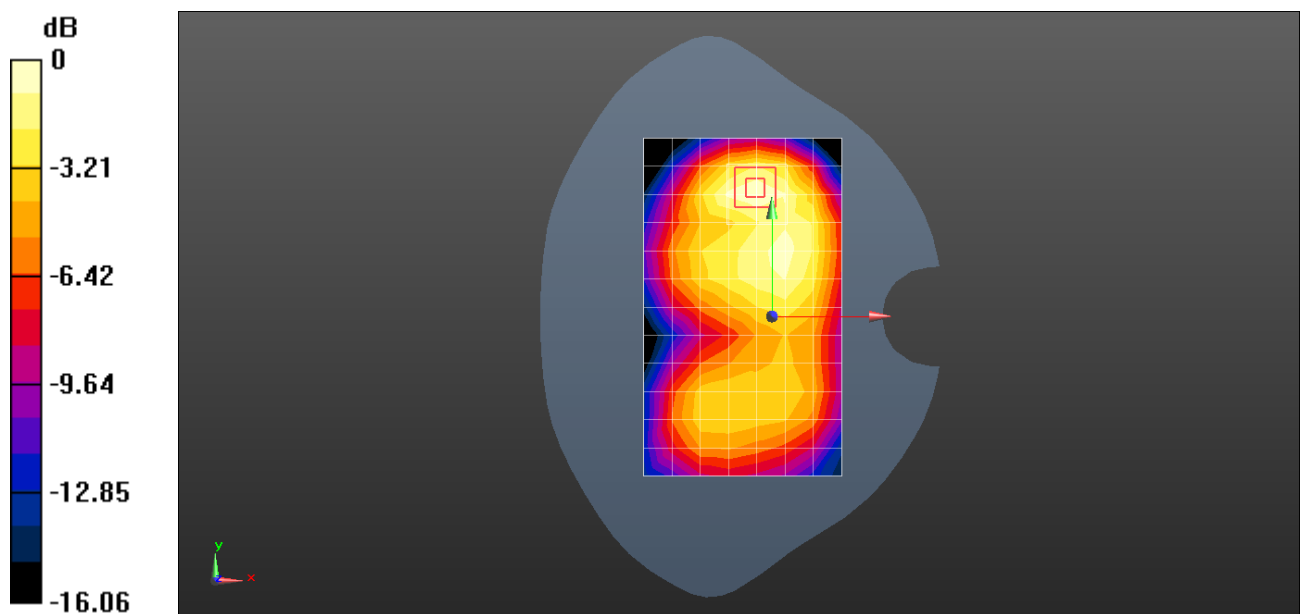

0 dB = 0.144 W/kg = -8.42 dBW/kg

Test Laboratory: HUAWEI SAR/HAC Lab

LON-L29 LTE Band II QPSK 1RB 50 offset 18900CH Top Side 10mm-Second Antenna

DUT: LON-L29; Type: Smart Phone; Serial: SAR2

Communication System: UID 0, LTE-FDD (SC-FDMA, 20MHz, QPSK/16-QAM) (0); Frequency: 1880 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.492$ S/m; $\epsilon_r = 52.053$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- ε Probe: EX3DV4 - SN3744; ConvF(7.48, 7.48, 7.48); Calibrated: 2016-7-26;
- ε Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- ε Electronics: DAE4 Sn1236; Calibrated: 2015-11-23
- ε Phantom: SAM3; Type: SAM; Serial: TP-1597
- ε DASY52 52.8.8(1258); SEMCAD X 14.6.10(7331)

Configuration/Body/Area Scan (5x9x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 0.400 W/kg


Configuration/Body/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 14.10 V/m; Power Drift = 0.05 dB

Peak SAR (extrapolated) = 0.490 W/kg

SAR(1 g) = 0.271 W/kg; SAR(10 g) = 0.142 W/kg

Maximum value of SAR (measured) = 0.411 W/kg

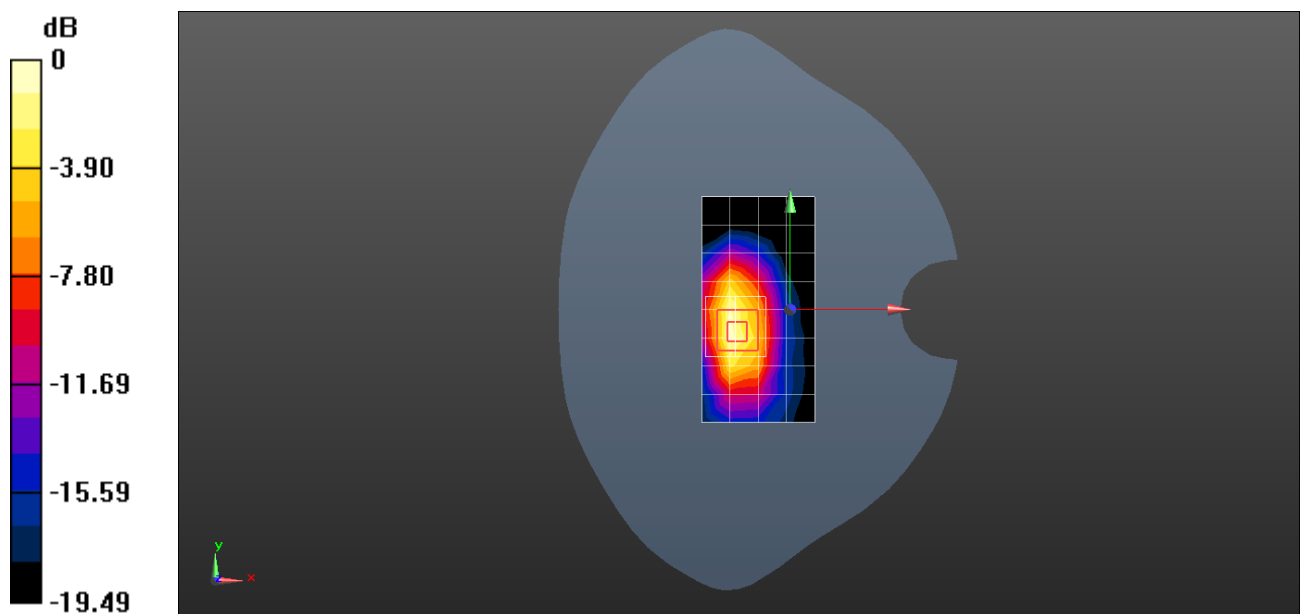

Test Laboratory: HUAWEI SAR/HAC Lab

LON-L29 LTE Band IV 20M QPSK 1RB 50 offset 20300CH Right touch-Second Antenna

DUT: LON-L29; Type: Smart Phone; Serial: SAR2

Communication System: UID 0, LTE-FDD (SC-FDMA, 20MHz, QPSK/16-QAM) (0); Frequency: 1745 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1745$ MHz; $\sigma = 1.338$ S/m; $\epsilon_r = 39.672$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY Configuration:

- ε Probe: EX3DV4 - SN3744; ConvF(8.09, 8.09, 8.09); Calibrated: 2016-7-26;
- ε Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- ε Electronics: DAE4 Sn1236; Calibrated: 2015-11-23
- ε Phantom: SAM4; Type: SAM; Serial: TP-1620
- ε DASY52 52.8.8(1258); SEMCAD X 14.6.10(7331)

Configuration/Head/Area Scan (8x13x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 2.01 W/kg


Configuration/Head/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 20.16 V/m; Power Drift = 0.02 dB

Peak SAR (extrapolated) = 3.22 W/kg

SAR(1 g) = 1.38 W/kg; SAR(10 g) = 0.747 W/kg

Maximum value of SAR (measured) = 2.39 W/kg

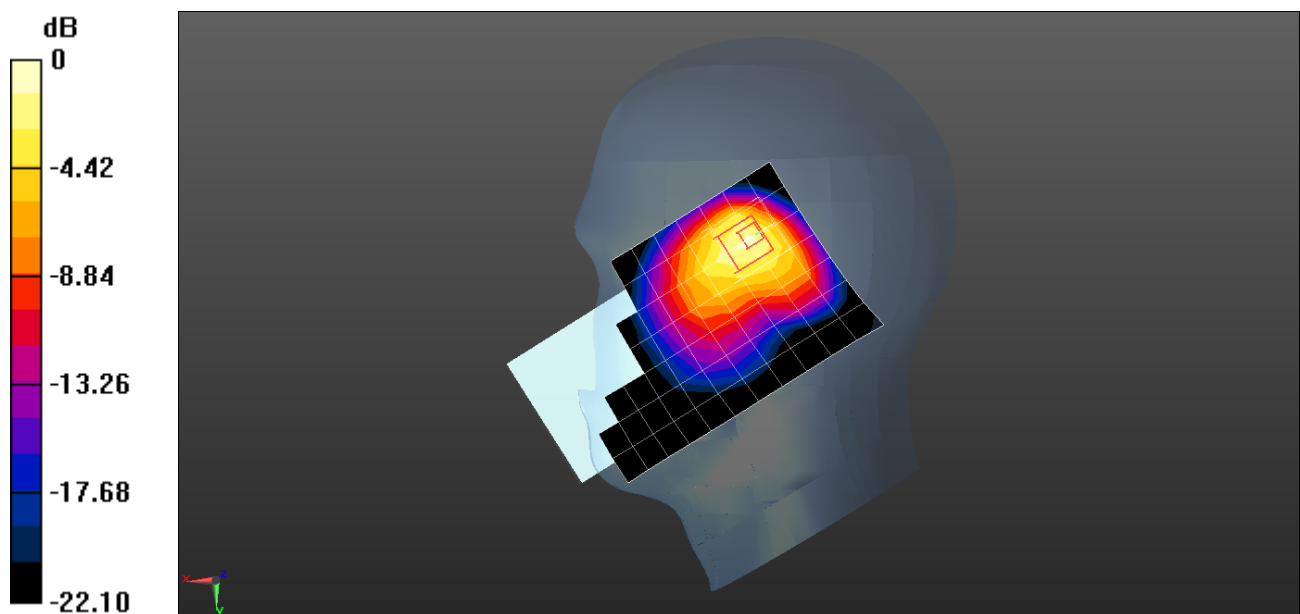

0 dB = 2.39 W/kg = 3.78 dBW/kg

Test Laboratory: HUAWEI SAR/HAC Lab

LON-L29 LTE Band IV 20M QPSK 1RB 50 offset 20300CH Back Side 15mm with Battery 3-Second Antenna

DUT: LON-L29; Type: Smart Phone; Serial: SAR2

Communication System: UID 0, LTE-FDD (SC-FDMA, 20MHz, QPSK/16-QAM) (0); Frequency: 1745 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1745$ MHz; $\sigma = 1.425$ S/m; $\epsilon_r = 53.752$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- ε Probe: EX3DV4 - SN3744; ConvF(7.61, 7.61, 7.61); Calibrated: 2016-7-26;
- ε Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- ε Electronics: DAE4 Sn1236; Calibrated: 2015-11-23
- ε Phantom: SAM3; Type: SAM; Serial: TP-1597
- ε DASY52 52.8.8(1258); SEMCAD X 14.6.10(7331)

Configuration/Body/Area Scan (8x14x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 0.201 W/kg


Configuration/Body/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 5.566 V/m; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 0.264 W/kg

SAR(1 g) = 0.162 W/kg; SAR(10 g) = 0.094 W/kg

Maximum value of SAR (measured) = 0.231 W/kg

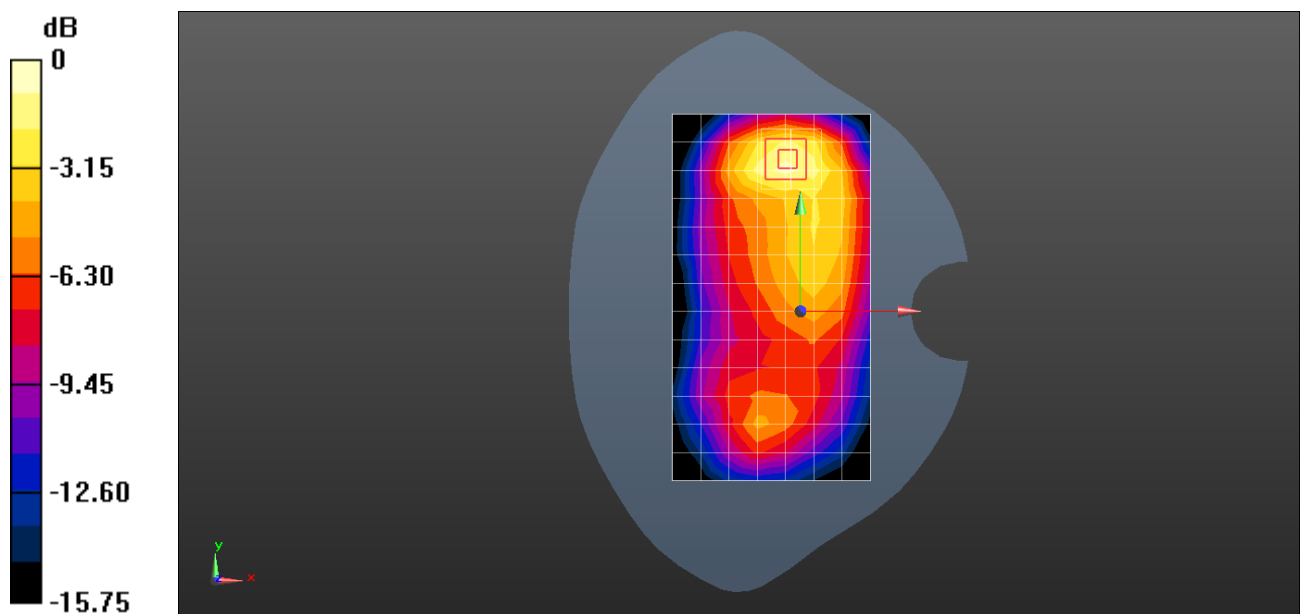

Test Laboratory: HUAWEI SAR/HAC Lab

LON-L29 LTE Band IV 20M QPSK 1RB 50 offset 20300CH Top Side 10mm with Battery 2-Second Antenna

DUT: LON-L29; Type: Smart Phone; Serial: SAR2

Communication System: UID 0, LTE-FDD (SC-FDMA, 20MHz, QPSK/16-QAM) (0); Frequency: 1745 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1745$ MHz; $\sigma = 1.425$ S/m; $\epsilon_r = 53.752$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- ε Probe: EX3DV4 - SN3744; ConvF(7.61, 7.61, 7.61); Calibrated: 2016-7-26;
- ε Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- ε Electronics: DAE4 Sn1236; Calibrated: 2015-11-23
- ε Phantom: SAM3; Type: SAM; Serial: TP-1597
- ε DASY52 52.8.8(1258); SEMCAD X 14.6.10(7331)

Configuration/Body/Area Scan (5x9x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 0.457 W/kg


Configuration/Body/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 14.47 V/m; Power Drift = 0.19 dB

Peak SAR (extrapolated) = 0.828 W/kg

SAR(1 g) = 0.477 W/kg; SAR(10 g) = 0.257 W/kg

Maximum value of SAR (measured) = 0.705 W/kg

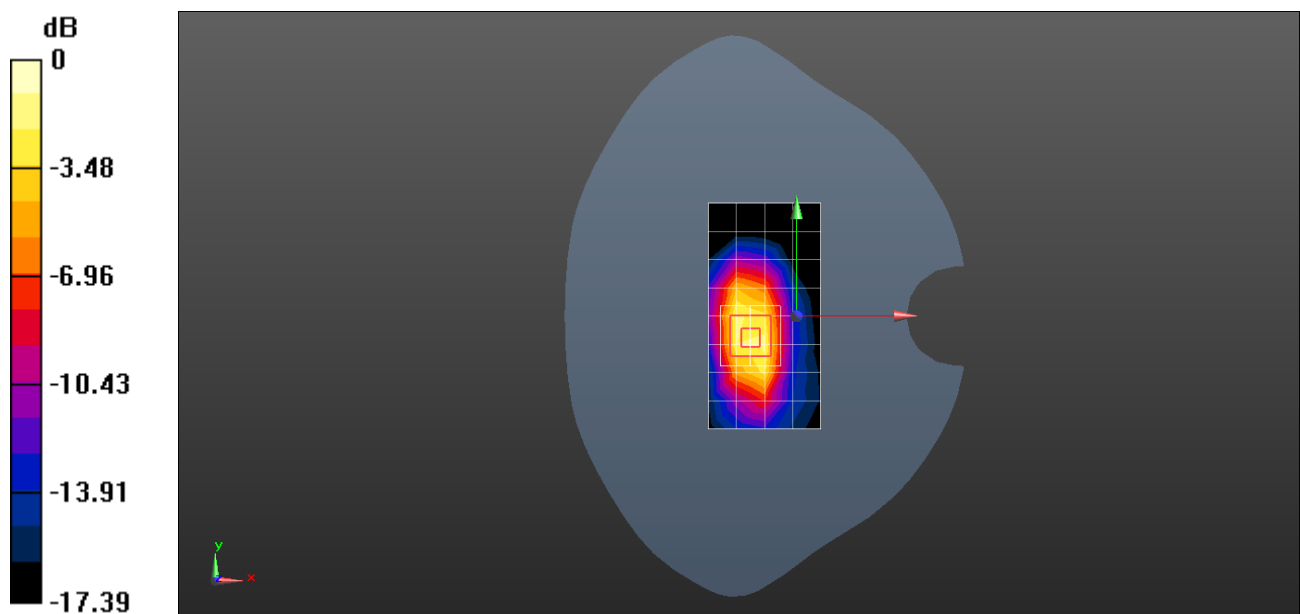

0 dB = 0.705 W/kg = -1.52 dBW/kg

Test Laboratory: HUAWEI SAR/HAC Lab

LON-L29 LTE Band V 10M QPSK 1RB 25 offset 20450CH Right touch with Battery 2-Second Antenna

DUT: LON-L29; Type: Smart Phone; Serial: SAR1

Communication System: UID 0, LTE-FDD (SC-FDMA, 10MHz, QPSK/16-QAM) (0); Frequency: 829 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 829 \text{ MHz}$; $\sigma = 0.9 \text{ S/m}$; $\epsilon_r = 41.679$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Right Section

DASY Configuration:

- ε Probe: EX3DV4 - SN3736; ConvF(9.17, 9.17, 9.17); Calibrated: 2016-4-26;
- ε Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- ε Electronics: DAE4 Sn852; Calibrated: 2016-4-20
- ε Phantom: SAM1; Type: SAM; Serial: TP-1475
- ε DASY52 52.8.8(1258); SEMCAD X 14.6.10(7331)

Configuration/Head/Area Scan (8x13x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (measured) = 1.61 W/kg


Configuration/Head/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 21.97 V/m ; Power Drift = 0.03 dB

Peak SAR (extrapolated) = 2.68 W/kg

SAR(1 g) = 1.08 W/kg ; SAR(10 g) = 0.565 W/kg

Maximum value of SAR (measured) = 1.95 W/kg

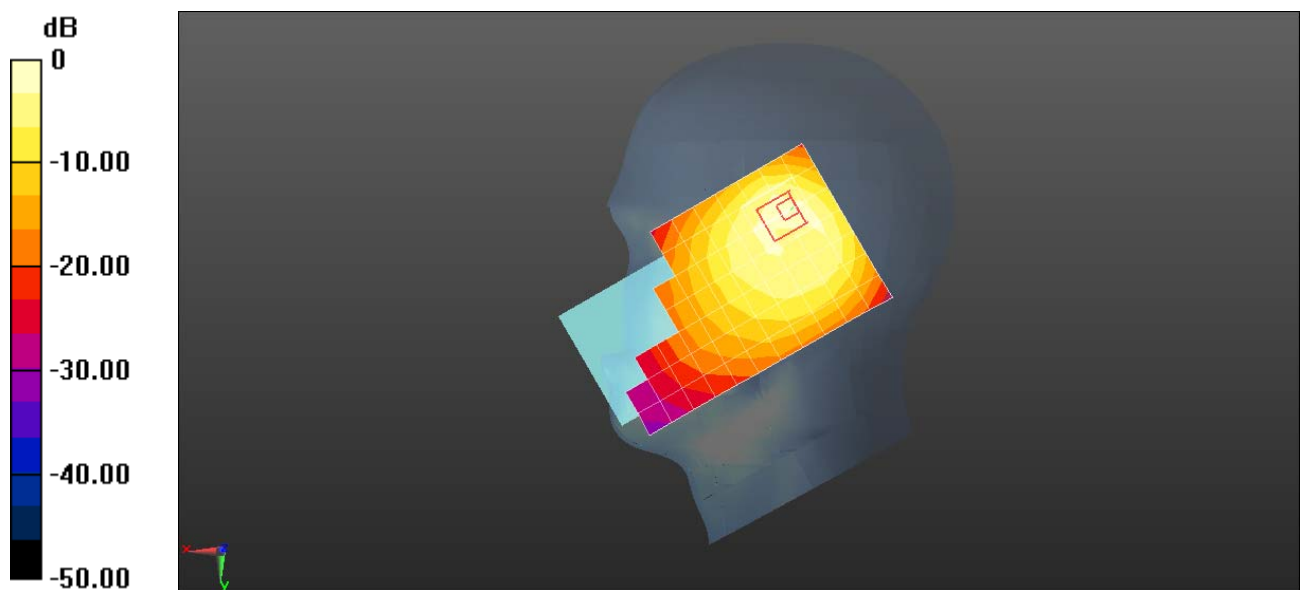

0 dB = 1.61 W/kg = 2.07 dBW/kg

Test Laboratory: HUAWEI SAR/HAC Lab

LON-L29 LTE Band V 10M QPSK 1RB 25 offset 20600CH Back Side 15mm with Battery 3-Second Antenna

DUT: LON-L29; Type: Smart Phone; Serial: SAR1

Communication System: UID 0, LTE-FDD (SC-FDMA, 10MHz, QPSK/16-QAM) (0); Frequency: 844 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 844 \text{ MHz}$; $\sigma = 0.986 \text{ S/m}$; $\epsilon_r = 53.748$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY Configuration:

- ε Probe: EX3DV4 - SN3736; ConvF(9.08, 9.08, 9.08); Calibrated: 2016-4-26;
- ε Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- ε Electronics: DAE4 Sn852; Calibrated: 2016-4-20
- ε Phantom: SAM2; Type: SAM; Serial: TP:1474
- ε DASY52 52.8.8(1258); SEMCAD X 14.6.10(7331)

Configuration/Body/Area Scan (8x13x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (measured) = 0.195 W/kg


Configuration/Body/Zoom Scan (6x6x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 12.18 V/m ; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 0.214 W/kg

SAR(1 g) = 0.160 W/kg ; SAR(10 g) = 0.115 W/kg

Maximum value of SAR (measured) = 0.196 W/kg

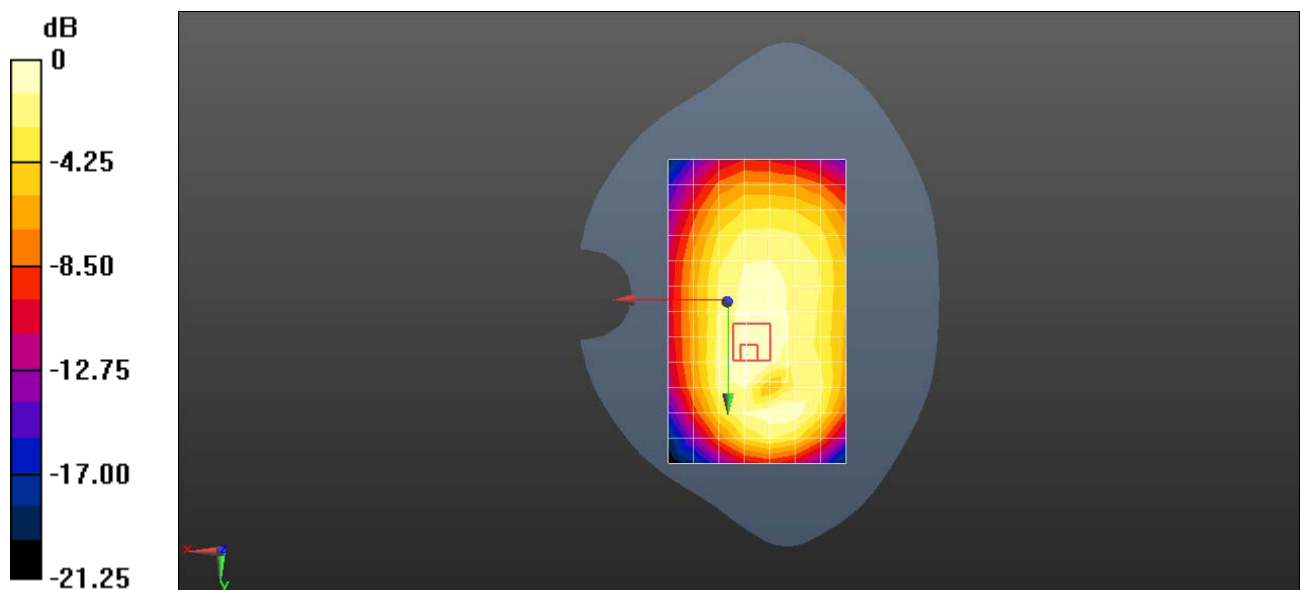

0 dB = 0.195 W/kg = -7.10 dBW/kg

Test Laboratory: HUAWEI SAR/HAC Lab

LON-L29 LTE Band V 10M QPSK 1RB 25 offset 20600CH Back Side 10mm with Battery 3-Second Antenna

DUT: LON-L29; Type: Smart Phone; Serial: SAR1

Communication System: UID 0, LTE-FDD (SC-FDMA, 10MHz, QPSK/16-QAM) (0); Frequency: 844 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 844 \text{ MHz}$; $\sigma = 0.986 \text{ S/m}$; $\epsilon_r = 53.748$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY Configuration:

- ε Probe: EX3DV4 - SN3736; ConvF(9.08, 9.08, 9.08); Calibrated: 2016-4-26;
- ε Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- ε Electronics: DAE4 Sn852; Calibrated: 2016-4-20
- ε Phantom: SAM2; Type: SAM; Serial: TP:1474
- ε DASY52 52.8.8(1258); SEMCAD X 14.6.10(7331)

Configuration/Body/Area Scan (8x13x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (measured) = 0.414 W/kg


Configuration/Body/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 13.72 V/m ; Power Drift = -0.09 dB

Peak SAR (extrapolated) = 0.584 W/kg

SAR(1 g) = 0.330 W/kg ; SAR(10 g) = 0.186 W/kg

Maximum value of SAR (measured) = 0.474 W/kg

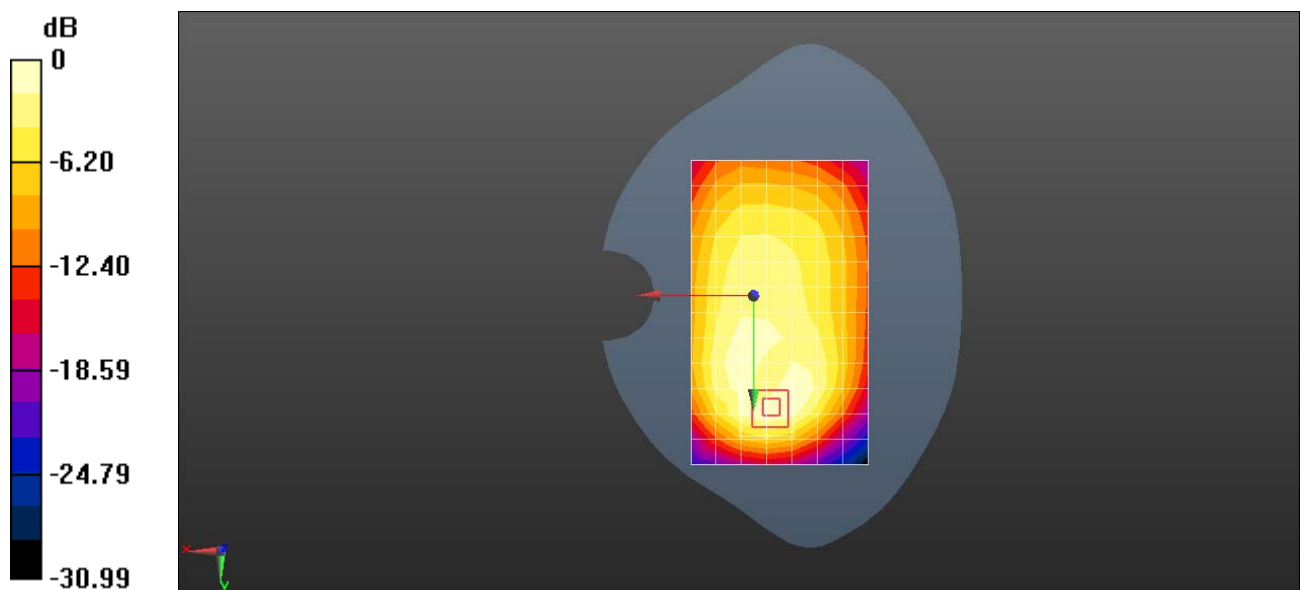

Test Laboratory: HUAWEI SAR/HAC Lab

LON LTE BandVII 20M QPSK 1RB 0 offset 21100 Right touch -Second antenna

DUT: LON-L29; Type: Smart Phone; Serial: SAR3

Communication System: UID 0, LTE-FDD (SC-FDMA, 20MHz, QPSK/16-QAM) (0); Frequency: 2535 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 2535$ MHz; $\sigma = 1.863$ S/m; $\epsilon_r = 40.644$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY Configuration:

- ε Probe: EX3DV4 - SN7346; ConvF(7.16, 7.16, 7.16); Calibrated: 2016-6-23;
- ε Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- ε Electronics: DAE4 Sn914; Calibrated: 2016/1/7
- ε Phantom: SAM5; Type: QD000P40CD; Serial: TP:1894
- ε DASY52 52.8.8(1222); SEMCAD X 14.6.10(7373)

Configuration/Head/Area Scan (10x9x1): Measurement grid: $dx=12$ mm, $dy=12$ mm

Maximum value of SAR (measured) = 1.84 W/kg


Configuration/Head/Zoom Scan (8x10x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 10.40 V/m; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 2.33 W/kg

SAR(1 g) = 1.07 W/kg; SAR(10 g) = 0.546 W/kg

Maximum value of SAR (measured) = 1.74 W/kg

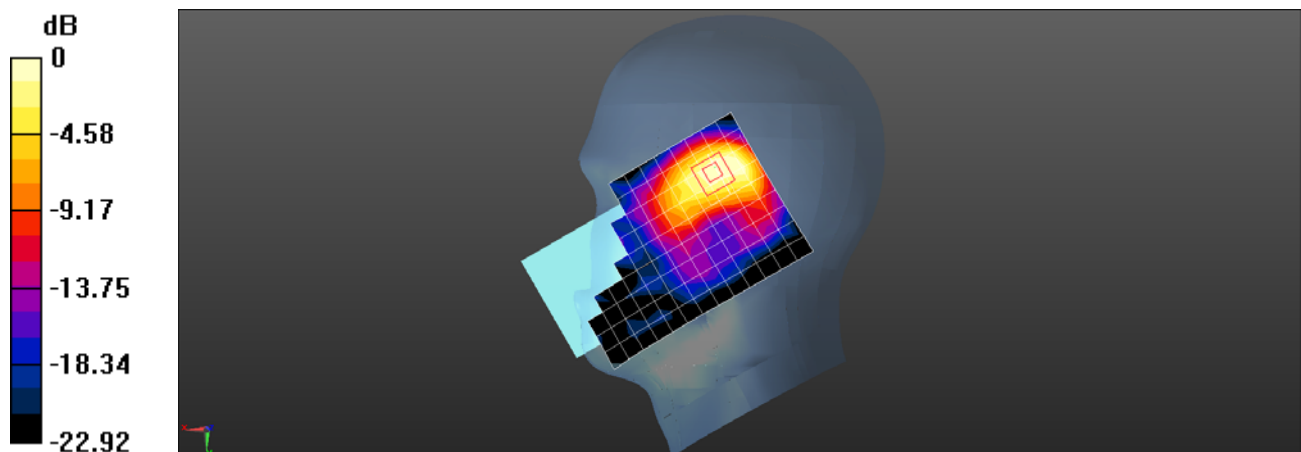

0 dB = 1.74 W/kg = 2.40 dBW/kg

Test Laboratory: HUAWEI SAR/HAC Lab

LON LTE Band VII 20M QPSK 1RB 99 offset 21350CH Front side 15mm -Second antenna

DUT: LON-L29; Type: Smart Phone; Serial: SAR3

Communication System: UID 0, LTE-FDD (SC-FDMA, 20MHz, QPSK/16-QAM) (0); Frequency: 2560 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 2560$ MHz; $\sigma = 2.098$ S/m; $\epsilon_r = 54.885$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- ε Probe: EX3DV4 - SN7346; ConvF(7.28, 7.28, 7.28); Calibrated: 2016-6-23;
- ε Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- ε Electronics: DAE4 Sn914; Calibrated: 2016/1/7
- ε Phantom: SAM6; Type: QD 000 P40 CD; Serial: 1892
- ε DASY52 52.8.8(1222); SEMCAD X 14.6.10(7373)

Configuration/Body/Area Scan (10x16x1): Measurement grid: $dx=12$ mm, $dy=12$ mm
Maximum value of SAR (measured) = 0.177 W/kg


Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 3.955 V/m; Power Drift = 0.03 dB

Peak SAR (extrapolated) = 0.206 W/kg

SAR(1 g) = 0.114 W/kg; SAR(10 g) = 0.064 W/kg

Maximum value of SAR (measured) = 0.171 W/kg

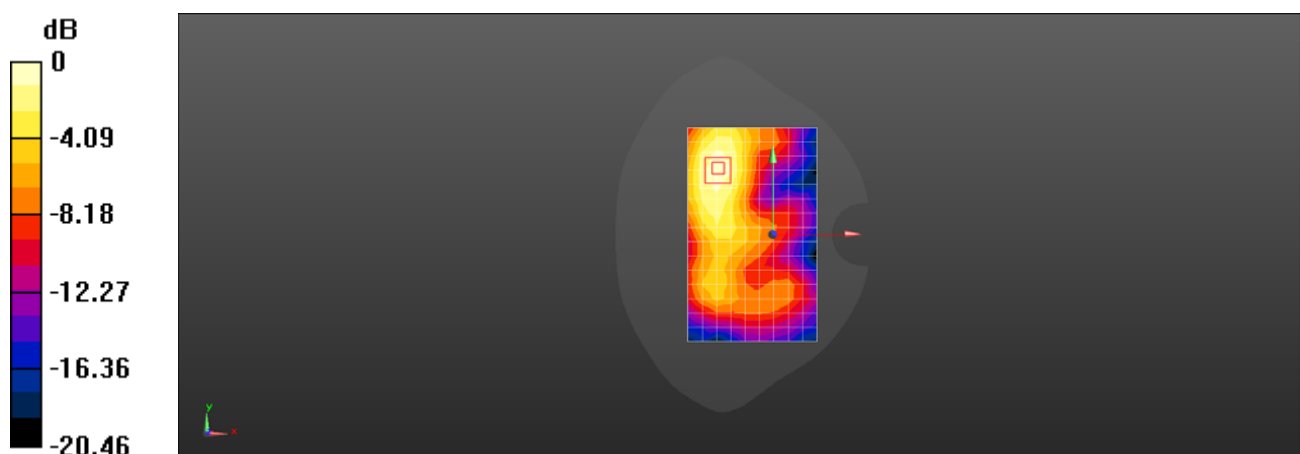

0 dB = 0.177 W/kg = -7.52 dBW/kg

Test Laboratory: HUAWEI SAR/HAC Lab

LON LTE Band VII 20M QPSK 1RB 99 offset 21350CH Back side 10mm -Second antenna

DUT: LON-L29; Type: Smart Phone; Serial: SAR3

Communication System: UID 0, LTE-FDD (SC-FDMA, 20MHz, QPSK/16-QAM) (0); Frequency: 2560 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 2560$ MHz; $\sigma = 2.098$ S/m; $\epsilon_r = 54.885$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- ε Probe: EX3DV4 - SN7346; ConvF(7.28, 7.28, 7.28); Calibrated: 2016-6-23;
- ε Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- ε Electronics: DAE4 Sn914; Calibrated: 2016/1/7
- ε Phantom: SAM6; Type: QD 000 P40 CD; Serial: 1892
- ε DASY52 52.8.8(1222); SEMCAD X 14.6.10(7373)

Configuration/Body/Area Scan (10x16x1): Measurement grid: $dx=12$ mm, $dy=12$ mm

Maximum value of SAR (measured) = 0.339 W/kg


Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 4.895 V/m; Power Drift = -0.05 dB

Peak SAR (extrapolated) = 0.437 W/kg

SAR(1 g) = 0.228 W/kg; SAR(10 g) = 0.117 W/kg

Maximum value of SAR (measured) = 0.361 W/kg

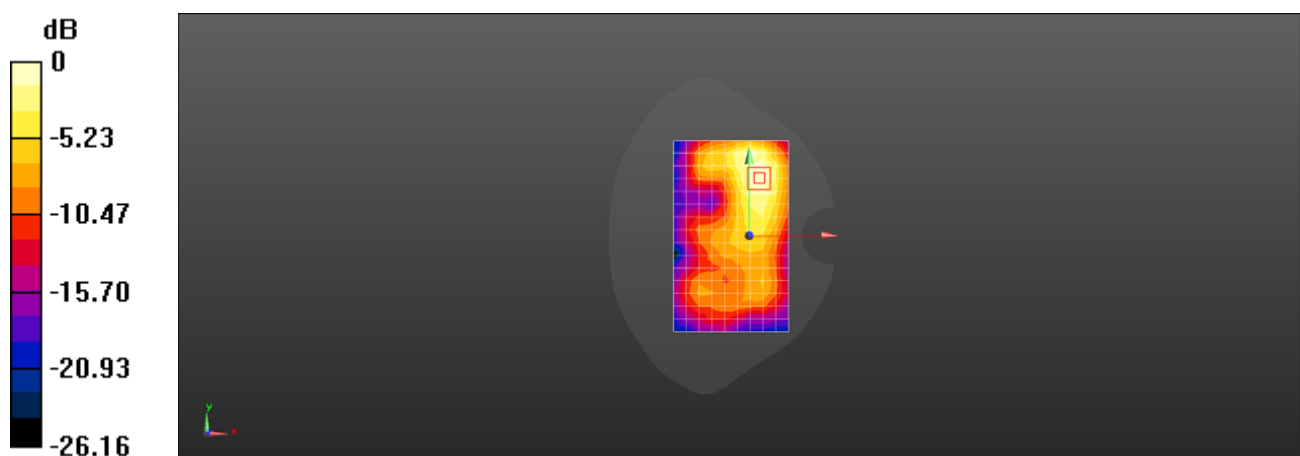

0 dB = 0.339 W/kg = -4.69 dBW/kg

Test Laboratory: HUAWEI SAR/HAC Lab

LON-L29 LTE Band XII 10M QPSK 1RB 25 offset 23060CH Right touch with battery2-Second Antenna

DUT: LON-L29; Type: Smart Phone; Serial: SAR2

Communication System: UID 0, LTE-FDD (SC-FDMA, 10MHz, QPSK/16-QAM) (0); Frequency: 704 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 704 \text{ MHz}$; $\sigma = 0.861 \text{ S/m}$; $\epsilon_r = 42.746$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Right Section

DASY Configuration:

- ε Probe: EX3DV4 - SN3744; ConvF(9.7, 9.7, 9.7); Calibrated: 2016-7-26;
- ε Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- ε Electronics: DAE4 Sn1236; Calibrated: 2015-11-23
- ε Phantom: SAM3; Type: SAM; Serial: TP-1597
- ε DASY52 52.8.8(1258); SEMCAD X 14.6.10(7331)

Configuration/Head/Area Scan (8x12x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (measured) = 1.78 W/kg


Configuration/Head/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 21.25 V/m ; Power Drift = -0.13 dB

Peak SAR (extrapolated) = 2.78 W/kg

SAR(1 g) = 1.1 W/kg ; SAR(10 g) = 0.551 W/kg

Maximum value of SAR (measured) = 1.82 W/kg

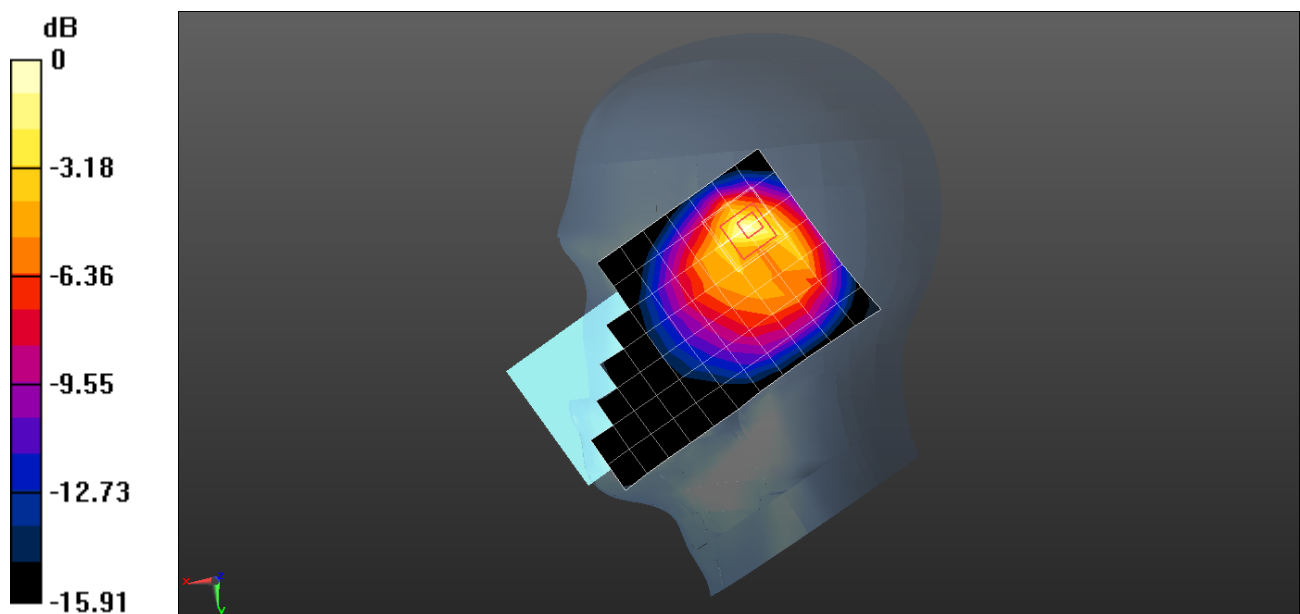

0 dB = 1.82 W/kg = 2.60 dBW/kg

Test Laboratory: HUAWEI SAR/HAC Lab

LON-L29 LTE Band XII 10M QPSK 25RB 13 offset 23130CH Back Side 15mm-Second Antenna

DUT: LON-L29; Type: Smart Phone; Serial: SAR2

Communication System: UID 0, LTE-FDD (SC-FDMA, 10MHz, QPSK/16-QAM) (0); Frequency: 711 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 711 \text{ MHz}$; $\sigma = 0.927 \text{ S/m}$; $\epsilon_r = 53.651$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY Configuration:

- ε Probe: EX3DV4 - SN3744; ConvF(9.03, 9.03, 9.03); Calibrated: 2016-7-26;
- ε Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- ε Electronics: DAE4 Sn1236; Calibrated: 2015-11-23
- ε Phantom: SAM4; Type: SAM; Serial: TP-1620
- ε DASY52 52.8.8(1258); SEMCAD X 14.6.10(7331)

Configuration/Body/Area Scan (8x14x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (measured) = 0.164 W/kg


Configuration/Body/Zoom Scan (7x10x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 8.458 V/m ; Power Drift = 0.12 dB

Peak SAR (extrapolated) = 0.203 W/kg

SAR(1 g) = 0.125 W/kg ; SAR(10 g) = 0.086 W/kg

Maximum value of SAR (measured) = 0.173 W/kg

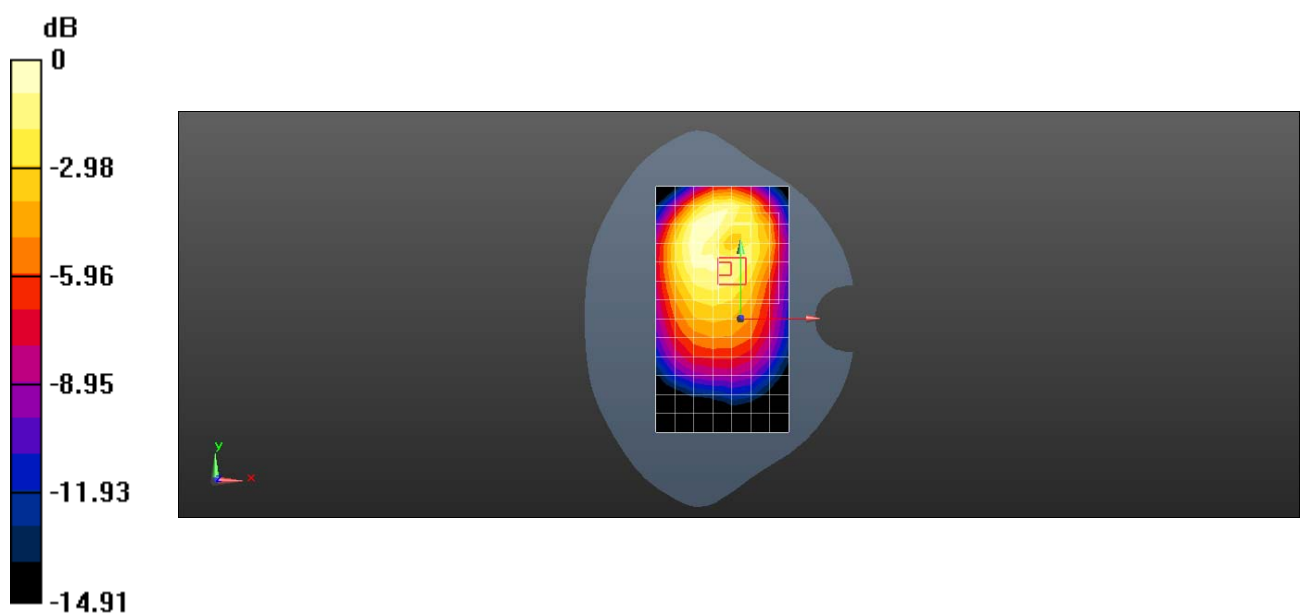

0 dB = 0.173 W/kg = -7.62 dBW/kg

Test Laboratory: HUAWEI SAR/HAC Lab

LON-L29 LTE Band XII 10M QPSK 1RB 25 offset 23130CH Back Side 10mm-Second Antenna

DUT: LON-L29; Type: Smart Phone; Serial: SAR2

Communication System: UID 0, LTE-FDD (SC-FDMA, 10MHz, QPSK/16-QAM) (0); Frequency: 711 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 711 \text{ MHz}$; $\sigma = 0.927 \text{ S/m}$; $\epsilon_r = 53.651$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY Configuration:

- ε Probe: EX3DV4 - SN3744; ConvF(9.03, 9.03, 9.03); Calibrated: 2016-7-26;
- ε Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- ε Electronics: DAE4 Sn1236; Calibrated: 2015-11-23
- ε Phantom: SAM4; Type: SAM; Serial: TP-1620
- ε DASY52 52.8.8(1258); SEMCAD X 14.6.10(7331)

Configuration/Body/Area Scan (8x14x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (measured) = 0.379 W/kg


Configuration/Body/Zoom Scan (6x6x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 9.490 V/m ; Power Drift = 0.03 dB

Peak SAR (extrapolated) = 0.533 W/kg

SAR(1 g) = 0.282 W/kg ; SAR(10 g) = 0.156 W/kg

Maximum value of SAR (measured) = 0.404 W/kg

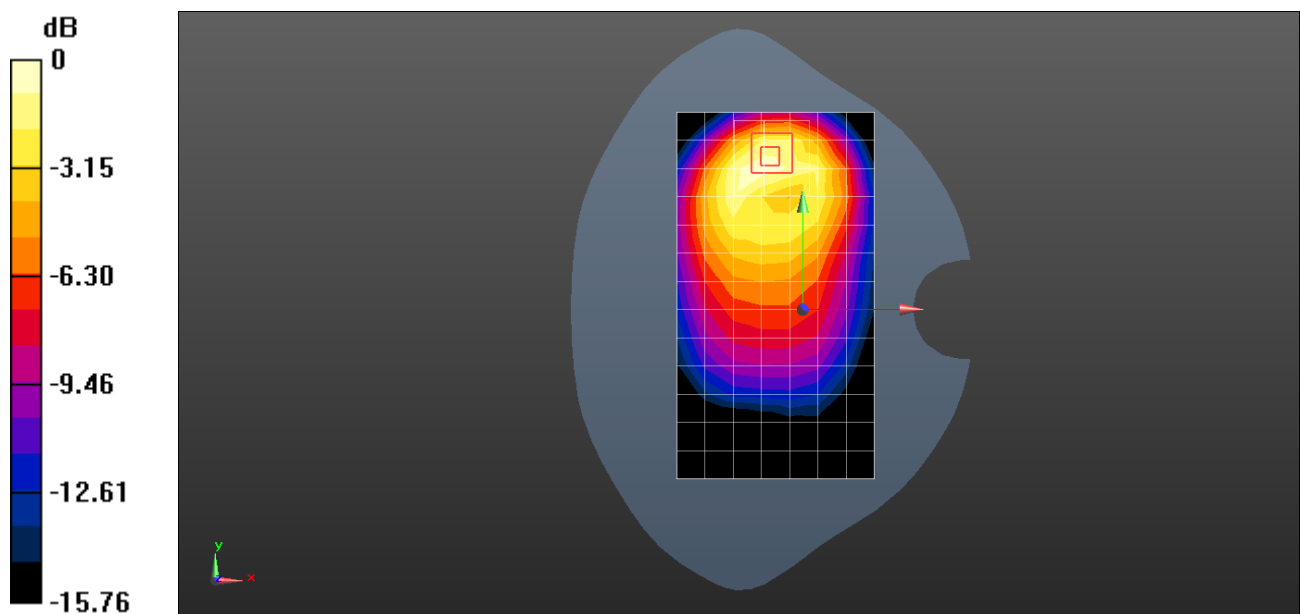

0 dB = 0.404 W/kg = -3.94 dBW/kg

Test Laboratory: HUAWEI SAR/HAC Lab

LON-L29 LTE Band XXVI 15M QPSK 1RB 38 offset 26965CH Right touch-Second Antenna

DUT: LON-L29; Type: Smart Phone; Serial: SAR1

Communication System: UID 0, LTE-FDD (SC-FDMA, 15MHz, QPSK/16-QAM) (0); Frequency: 841.5 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 841.5$ MHz; $\sigma = 0.906$ S/m; $\epsilon_r = 41.62$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY Configuration:

- ε Probe: EX3DV4 - SN3736; ConvF(9.17, 9.17, 9.17); Calibrated: 2016-4-26;
- ε Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- ε Electronics: DAE4 Sn852; Calibrated: 2016-4-20
- ε Phantom: SAM1; Type: SAM; Serial: TP-1475
- ε DASY52 52.8.8(1258); SEMCAD X 14.6.10(7331)

Configuration/Head/Area Scan (8x13x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 1.82 W/kg

Configuration/Head/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm


Reference Value = 23.82 V/m; Power Drift = 0.07 dB

Peak SAR (extrapolated) = 3.10 W/kg

SAR(1 g) = 1.26 W/kg; SAR(10 g) = 0.659 W/kg

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 2.25 W/kg

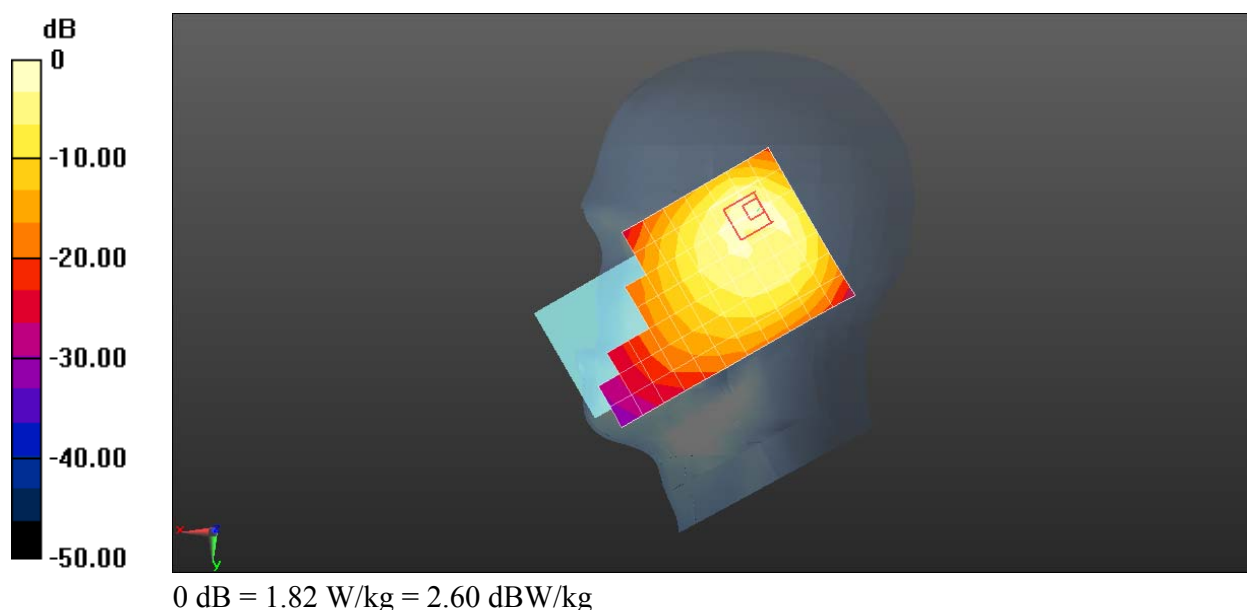

Test Laboratory: HUAWEI SAR/HAC Lab

LON-L29 LTE Band XXVI 15M QPSK 36RB 18 offset 26965CH Back Side 15mm with Battery 2-Second Antenna

DUT: LON-L29; Type: Smart Phone; Serial: SAR1

Communication System: UID 0, LTE-FDD (SC-FDMA, 15MHz, QPSK/16-QAM) (0); Frequency: 841.5 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 841.5$ MHz; $\sigma = 0.985$ S/m; $\epsilon_r = 53.77$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- ε Probe: EX3DV4 - SN3736; ConvF(9.08, 9.08, 9.08); Calibrated: 2016-4-26;
- ε Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- ε Electronics: DAE4 Sn852; Calibrated: 2016-4-20
- ε Phantom: SAM2; Type: SAM; Serial: TP:1474
- ε DASY52 52.8.8(1258); SEMCAD X 14.6.10(7331)

Configuration/Body/Area Scan (8x13x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.203 W/kg

Configuration/Body/Zoom Scan (6x6x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm


Reference Value = 12.18 V/m; Power Drift = -0.08 dB

Peak SAR (extrapolated) = 0.228 W/kg

SAR(1 g) = 0.170 W/kg; SAR(10 g) = 0.122 W/kg

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.208 W/kg

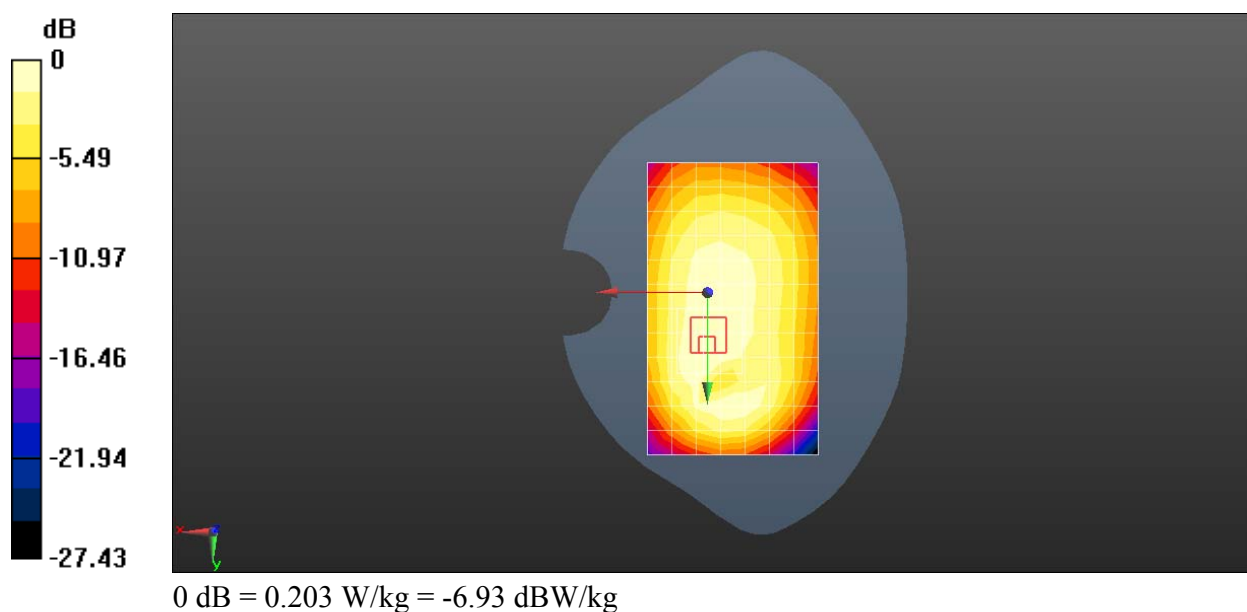

Test Laboratory: HUAWEI SAR/HAC Lab

LON-L29 LTE Band XXVI 15M QPSK 1RB 38 offset 26775CH Back Side 10mm-Second Antenna

DUT: LON-L29; Type: Smart Phone; Serial: SAR1

Communication System: UID 0, LTE-FDD (SC-FDMA, 15MHz, QPSK/16-QAM) (0); Frequency: 822.5 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 822.5$ MHz; $\sigma = 0.963$ S/m; $\epsilon_r = 53.957$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- ε Probe: EX3DV4 - SN3736; ConvF(9.08, 9.08, 9.08); Calibrated: 2016-4-26;
- ε Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- ε Electronics: DAE4 Sn852; Calibrated: 2016-4-20
- ε Phantom: SAM2; Type: SAM; Serial: TP:1474
- ε DASY52 52.8.8(1258); SEMCAD X 14.6.10(7331)

Configuration/Body/Area Scan (8x13x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.379 W/kg

Configuration/Body/Zoom Scan (6x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm


Reference Value = 12.47 V/m; Power Drift = -0.02 dB

Peak SAR (extrapolated) = 0.470 W/kg

SAR(1 g) = 0.267 W/kg; SAR(10 g) = 0.150 W/kg

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.396 W/kg

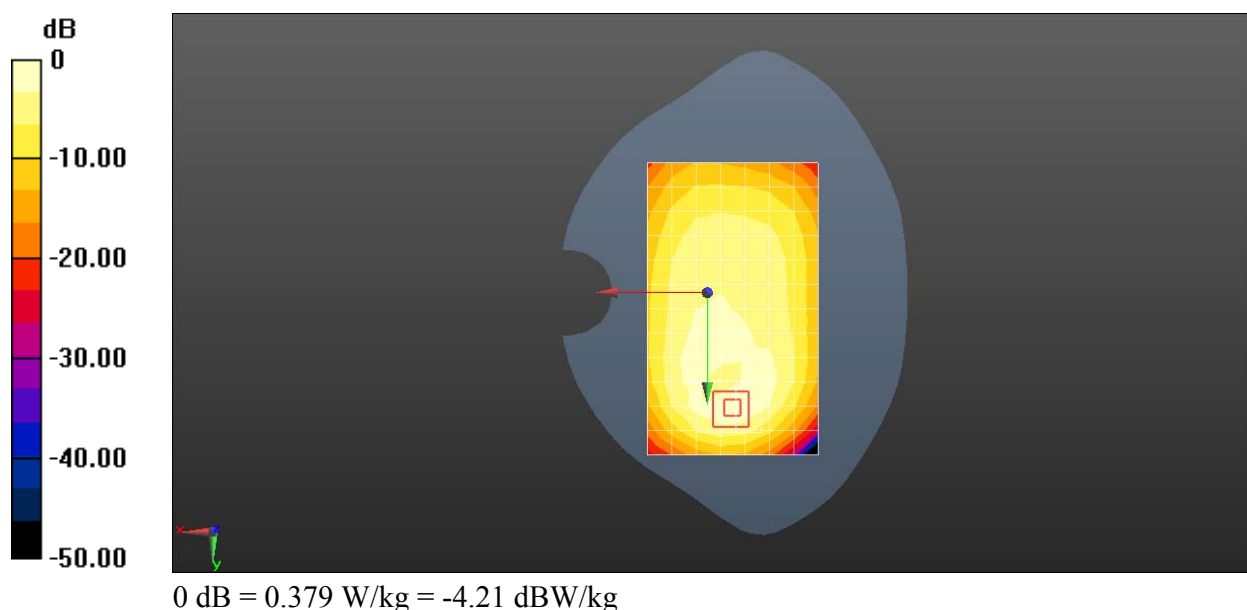

Test Laboratory: HUAWEI SAR/HAC Lab

LON LTE Band XLI 20M QPSK 50RB 0 offset 41140 Right touch with battery 2-Second antenna

DUT: LON-L29; Type: Smart Phone; Serial: SAR3

Communication System: UID 0, LTE-TDD (SC-FDMA, 20MHz, QPSK/16-QAM) (0); Frequency: 2645 MHz; Duty Cycle: 1:1.58855

Medium parameters used: $f = 2645$ MHz; $\sigma = 1.967$ S/m; $\epsilon_r = 40.584$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY Configuration:

- ε Probe: EX3DV4 - SN7346; ConvF(7.16, 7.16, 7.16); Calibrated: 2016-6-23;
- ε Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- ε Electronics: DAE4 Sn914; Calibrated: 2016/1/7
- ε Phantom: SAM5; Type: QD000P40CD; Serial: TP:1894
- ε DASY52 52.8.8(1222); SEMCAD X 14.6.10(7373)

Configuration/Head/Area Scan (10x16x1): Measurement grid: $dx=12$ mm, $dy=12$ mm

Maximum value of SAR (measured) = 1.63 W/kg


Configuration/Head/Zoom Scan (7x9x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 8.923 V/m; Power Drift = -0.10 dB

Peak SAR (extrapolated) = 2.50 W/kg

SAR(1 g) = 1.12 W/kg; SAR(10 g) = 0.578 W/kg

Maximum value of SAR (measured) = 1.83 W/kg

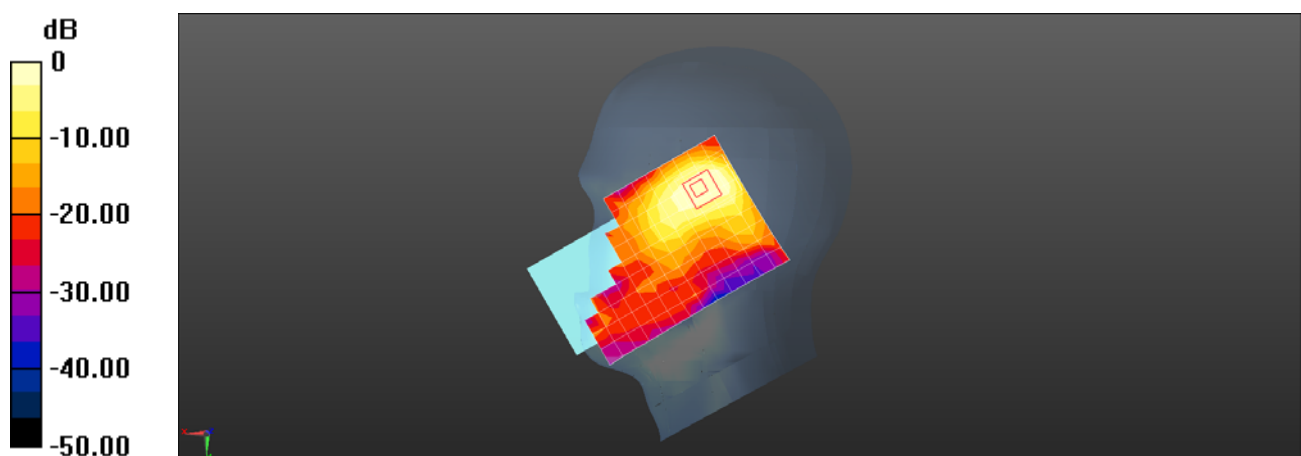

0 dB = 1.63 W/kg = 2.12 dBW/kg

Test Laboratory: HUAWEI SAR/HAC Lab

LON LTE Band XLI 20M QPSK 1RB 99 offset 40460 Front side 15mm with Battery 2-Second antenna

DUT: LON-L29; Type: Smart Phone; Serial: SAR3

Communication System: UID 0, LTE-TDD (SC-FDMA, 20MHz, QPSK/16-QAM) (0); Frequency: 2577 MHz; Duty Cycle: 1:1.58855

Medium parameters used: $f = 2605$ MHz; $\sigma = 2.152$ S/m; $\epsilon_r = 54.75$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- ε Probe: EX3DV4 - SN7346; ConvF(7.28, 7.28, 7.28); Calibrated: 2016-6-23;
- ε Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- ε Electronics: DAE4 Sn914; Calibrated: 2016/1/7
- ε Phantom: SAM6; Type: QD 000 P40 CD; Serial: 1892
- ε DASY52 52.8.8(1222); SEMCAD X 14.6.10(7373)

Configuration/Body/Area Scan (10x16x1): Measurement grid: $dx=12$ mm, $dy=12$ mm

Maximum value of SAR (measured) = 0.164 W/kg


Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 3.866 V/m; Power Drift = 0.15 dB

Peak SAR (extrapolated) = 0.215 W/kg

SAR(1 g) = 0.120 W/kg; SAR(10 g) = 0.068 W/kg

Maximum value of SAR (measured) = 0.180 W/kg

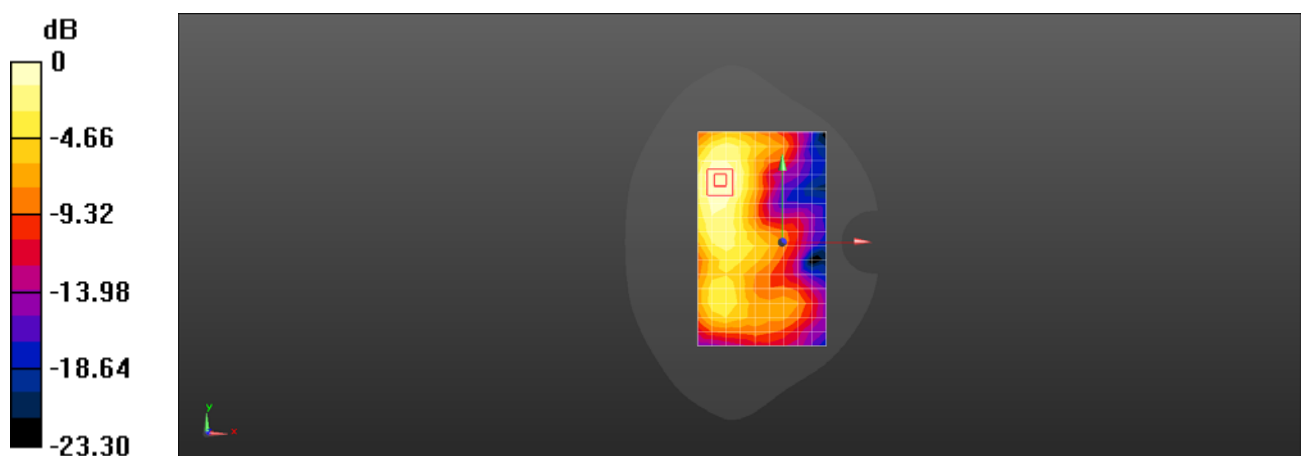

0 dB = 0.164 W/kg = -7.86 dBW/kg

Test Laboratory: HUAWEI SAR/HAC Lab

LON LTE Band XLI 20M QPSK 1RB 99 offset 40460 Front side 10mm -Second antenna

DUT: LON-L29; Type: Smart Phone; Serial: SAR3

Communication System: UID 0, LTE-TDD (SC-FDMA, 20MHz, QPSK/16-QAM) (0); Frequency: 2577 MHz; Duty Cycle: 1:1.58855

Medium parameters used: $f = 2605$ MHz; $\sigma = 2.152$ S/m; $\epsilon_r = 54.75$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- ε Probe: EX3DV4 - SN7346; ConvF(7.28, 7.28, 7.28); Calibrated: 2016-6-23;
- ε Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- ε Electronics: DAE4 Sn914; Calibrated: 2016/1/7
- ε Phantom: SAM6; Type: QD 000 P40 CD; Serial: 1892
- ε DASY52 52.8.8(1222); SEMCAD X 14.6.10(7373)

Configuration/Body/Area Scan (10x16x1): Measurement grid: $dx=12$ mm, $dy=12$ mm

Maximum value of SAR (measured) = 0.509 W/kg


Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 5.772 V/m; Power Drift = 0.06 dB

Peak SAR (extrapolated) = 0.640 W/kg

SAR(1 g) = 0.358 W/kg; SAR(10 g) = 0.196 W/kg

Maximum value of SAR (measured) = 0.537 W/kg

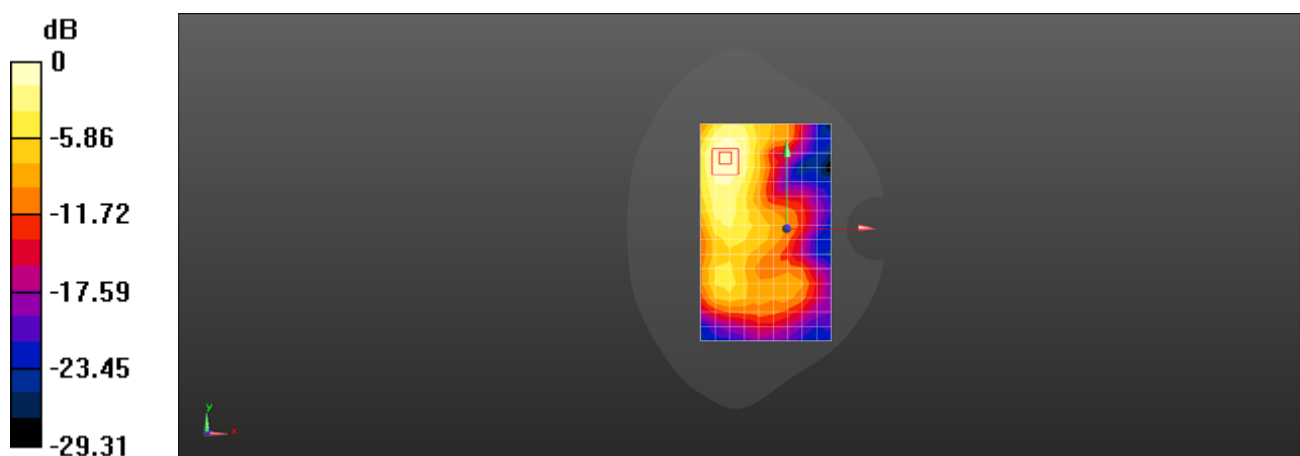

0 dB = 0.509 W/kg = -2.93 dBW/kg

Test Laboratory: HUAWEI SAR/HAC Lab

LON-L29 GSM850 251CH Right touch with Battery 2-Main Antenna

DUT: LON-L29; Type: Smart Phone; Serial: SAR1

Communication System: UID 0, HW-GSM\GPRS\EGPRS-1TS (0); Frequency: 848.8 MHz; Duty Cycle: 1:8.30042

Medium parameters used: $f = 849$ MHz; $\sigma = 0.913$ S/m; $\epsilon_r = 41.586$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY Configuration:

- ε Probe: EX3DV4 - SN3736; ConvF(9.17, 9.17, 9.17); Calibrated: 2016-4-26;
- ε Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- ε Electronics: DAE4 Sn852; Calibrated: 2016-4-20
- ε Phantom: SAM1; Type: SAM; Serial: TP-1475
- ε DASY52 52.8.8(1258); SEMCAD X 14.6.10(7331)

Configuration/Head/Area Scan (8x13x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 0.206 W/kg


Configuration/Head/Zoom Scan (6x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 6.101 V/m; Power Drift = 0.03 dB

Peak SAR (extrapolated) = 0.224 W/kg

SAR(1 g) = 0.166 W/kg; SAR(10 g) = 0.125 W/kg

Maximum value of SAR (measured) = 0.202 W/kg

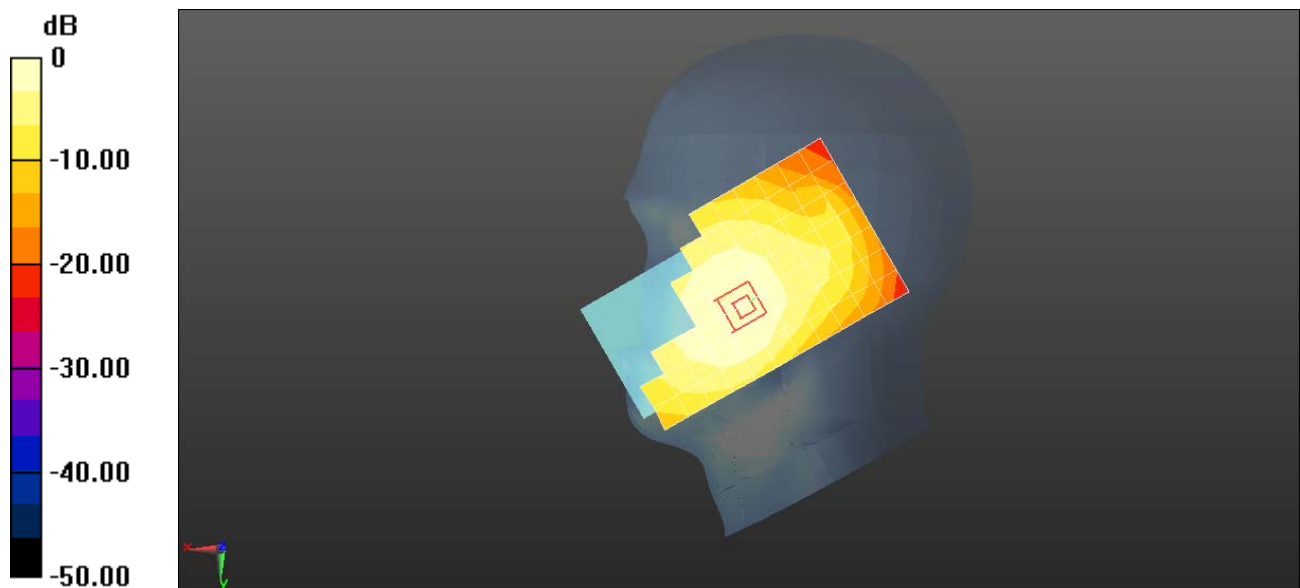

0 dB = 0.206 W/kg = -6.86 dBW/kg

Test Laboratory: HUAWEI SAR/HAC Lab

LON-L29 GSM850 190CH Back Side 15mm with Battery 2-Main Antenna

DUT: LON-L29; Type: Smart Phone; Serial: SAR1

Communication System: UID 0, HW-GSM\GPRS\EGPRS-1TS (0); Frequency: 836.6 MHz; Duty Cycle: 1:8.30042

Medium parameters used: $f = 837 \text{ MHz}$; $\sigma = 1.006 \text{ S/m}$; $\epsilon_r = 53.907$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY Configuration:

- ε Probe: EX3DV4 - SN3736; ConvF(9.08, 9.08, 9.08); Calibrated: 2016-4-26;
- ε Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- ε Electronics: DAE4 Sn852; Calibrated: 2016-4-20
- ε Phantom: SAM2; Type: SAM; Serial: TP:1474
- ε DASY52 52.8.8(1258); SEMCAD X 14.6.10(7331)

Configuration/Body/Area Scan (8x13x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$


Maximum value of SAR (measured) = 0.150 W/kg

Configuration/Body/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 10.41 V/m ; Power Drift = 0.00 dB

Peak SAR (extrapolated) = 0.163 W/kg

SAR(1 g) = 0.125 W/kg ; SAR(10 g) = 0.094 W/kg

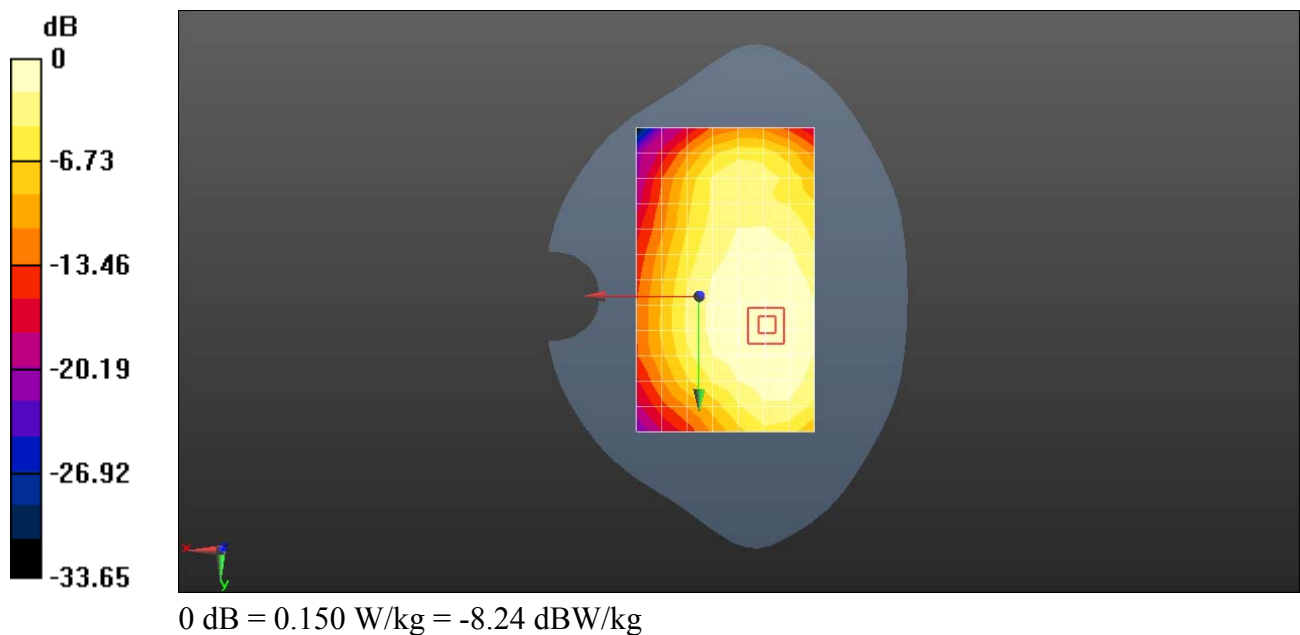

Test Laboratory: HUAWEI SAR/HAC Lab

LON-L29 GSM850 GPRS 2TS 190CH Right Side 10mm with Battery 2-Main Antenna

DUT: LON-L29; Type: Smart Phone; Serial: SAR1

Communication System: UID 0, HW-GSM\GPRS\EGPRS-2TS (0); Frequency: 836.6 MHz; Duty Cycle: 1:4.10015

Medium parameters used: $f = 837$ MHz; $\sigma = 1.006$ S/m; $\epsilon_r = 53.907$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- ε Probe: EX3DV4 - SN3736; ConvF(9.08, 9.08, 9.08); Calibrated: 2016-4-26;
- ε Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- ε Electronics: DAE4 Sn852; Calibrated: 2016-4-20
- ε Phantom: SAM2; Type: SAM; Serial: TP:1474
- ε DASY52 52.8.8(1258); SEMCAD X 14.6.10(7331)

Configuration/Body/Area Scan (6x13x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 0.171 W/kg


Configuration/Body/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 12.27 V/m; Power Drift = 0.12 dB

Peak SAR (extrapolated) = 0.209 W/kg

SAR(1 g) = 0.141 W/kg; SAR(10 g) = 0.096 W/kg

Maximum value of SAR (measured) = 0.185 W/kg

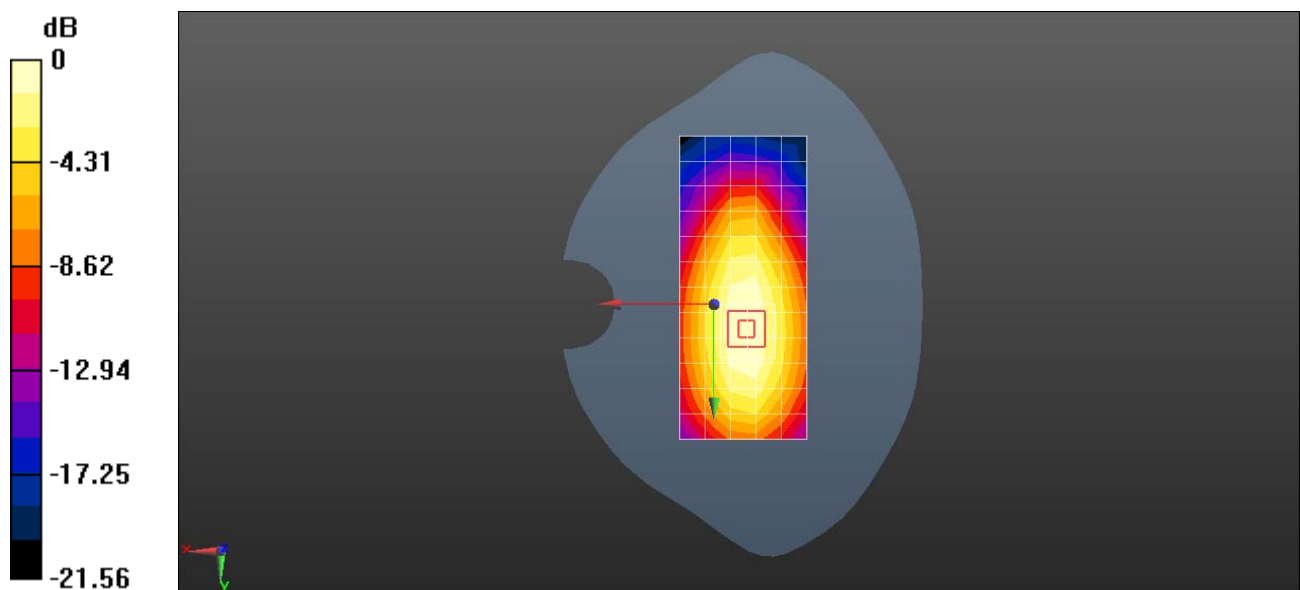

0 dB = 0.171 W/kg = -7.67 dBW/kg

Test Laboratory: HUAWEI SAR/HAC Lab

LON-L29 GSM1900 512CH Left touch-Main Antenna

DUT: LON-L29; Type: Smart Phone; Serial: SAR2

Communication System: UID 0, HW-GSM\GPRS\EGPRS-1TS (0); Frequency: 1850.2 MHz; Duty Cycle: 1:8.30042

Medium parameters used (interpolated): $f = 1850.2$ MHz; $\sigma = 1.374$ S/m; $\epsilon_r = 39.861$; $\rho = 1000$ kg/m³

Phantom section: Left Section

DASY Configuration:

- ε Probe: EX3DV4 - SN3744; ConvF(7.74, 7.74, 7.74); Calibrated: 2016-7-26;
- ε Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- ε Electronics: DAE4 Sn1236; Calibrated: 2015-11-23
- ε Phantom: SAM4; Type: SAM; Serial: TP-1620
- ε DASY52 52.8.8(1258); SEMCAD X 14.6.10(7331)

Configuration/Head/Area Scan (8x13x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.296 W/kg

Configuration/Head/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm



Reference Value = 3.124 V/m; Power Drift = 0.00 dB

Peak SAR (extrapolated) = 0.346 W/kg

SAR(1 g) = 0.225 W/kg; SAR(10 g) = 0.140 W/kg

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.297 W/kg

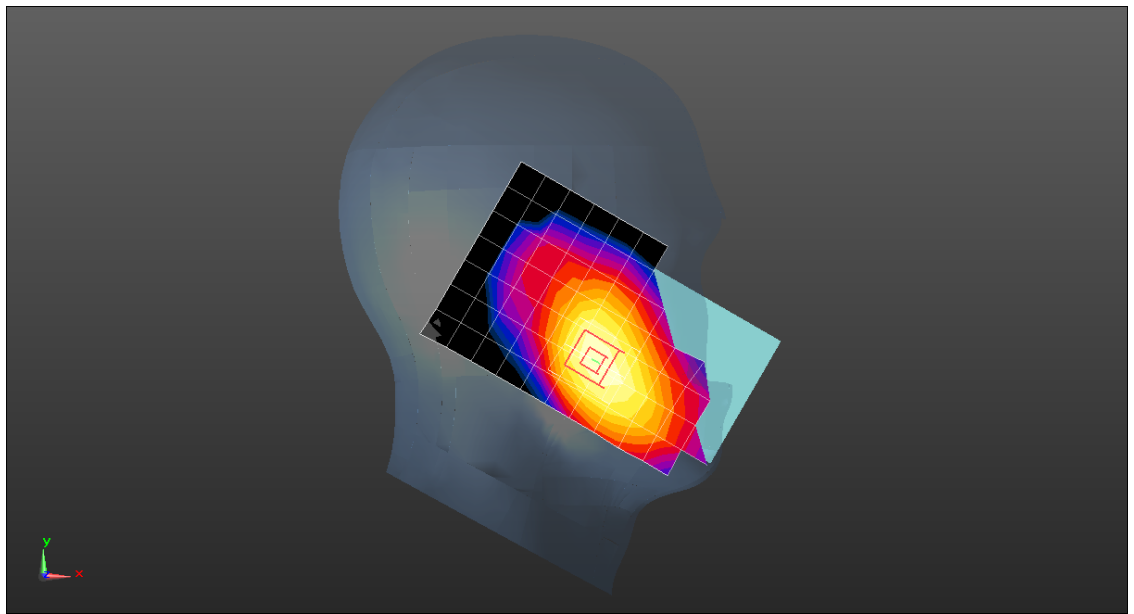

0 dB = 0.297 W/kg = -5.27 dBW/kg

Test Laboratory: HUAWEI SAR/HAC Lab

LON-L29 GSM1900 661CH Back Side 15mm-Main Antenna

DUT: LON-L29; Type: Smart Phone; Serial: SAR2

Communication System: UID 0, HW-GSM\GPRS\EGPRS-1TS (0); Frequency: 1880 MHz; Duty Cycle: 1:8.30042

Medium parameters used: $f = 1880 \text{ MHz}$; $\sigma = 1.492 \text{ S/m}$; $\epsilon_r = 52.053$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY Configuration:

- ε Probe: EX3DV4 - SN3744; ConvF(7.48, 7.48, 7.48); Calibrated: 2016-7-26;
- ε Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- ε Electronics: DAE4 Sn1236; Calibrated: 2015-11-23
- ε Phantom: SAM3; Type: SAM; Serial: TP-1597
- ε DASY52 52.8.8(1258); SEMCAD X 14.6.10(7331)

Configuration/Body/Area Scan (8x14x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (measured) = 0.103 W/kg


Configuration/Body/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 4.769 V/m ; Power Drift = 0.08 dB

Peak SAR (extrapolated) = 0.164 W/kg

SAR(1 g) = 0.091 W/kg ; SAR(10 g) = 0.051 W/kg

Maximum value of SAR (measured) = 0.138 W/kg

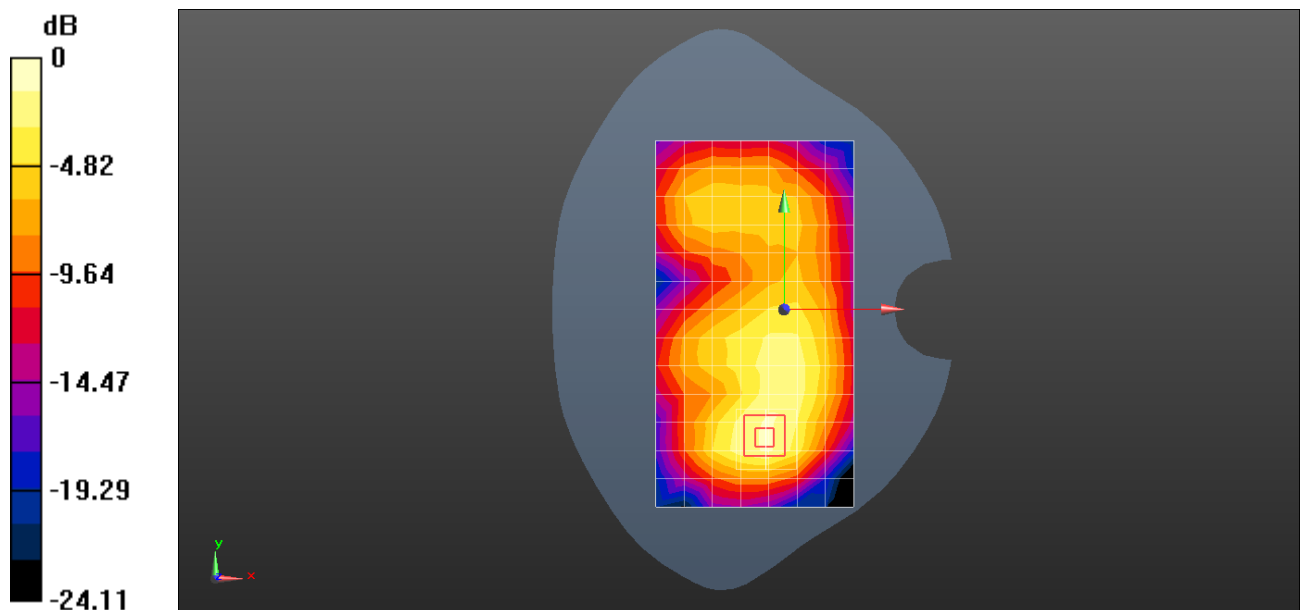

0 dB = 0.138 W/kg = -8.60 dBW/kg

Test Laboratory: HUAWEI SAR/HAC Lab

LON-L29 GSM1900 GPRS 2TS 661CH Bottom Side 10mm-Main Antenna

DUT: LON-L29; Type: Smart Phone; Serial: SAR2

Communication System: UID 0, HW-GSM\GPRS\EGPRS-2TS (0); Frequency: 1880 MHz; Duty Cycle: 1:4.10015

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.492$ S/m; $\epsilon_r = 52.053$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- ε Probe: EX3DV4 - SN3744; ConvF(7.48, 7.48, 7.48); Calibrated: 2016-7-26;
- ε Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- ε Electronics: DAE4 Sn1236; Calibrated: 2015-11-23
- ε Phantom: SAM3; Type: SAM; Serial: TP-1597
- ε DASY52 52.8.8(1258); SEMCAD X 14.6.10(7331)

Configuration/Body/Area Scan (5x9x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 0.318 W/kg


Configuration/Body/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 12.86 V/m; Power Drift = 0.15 dB

Peak SAR (extrapolated) = 0.419 W/kg

SAR(1 g) = 0.232 W/kg; SAR(10 g) = 0.125 W/kg

Maximum value of SAR (measured) = 0.349 W/kg

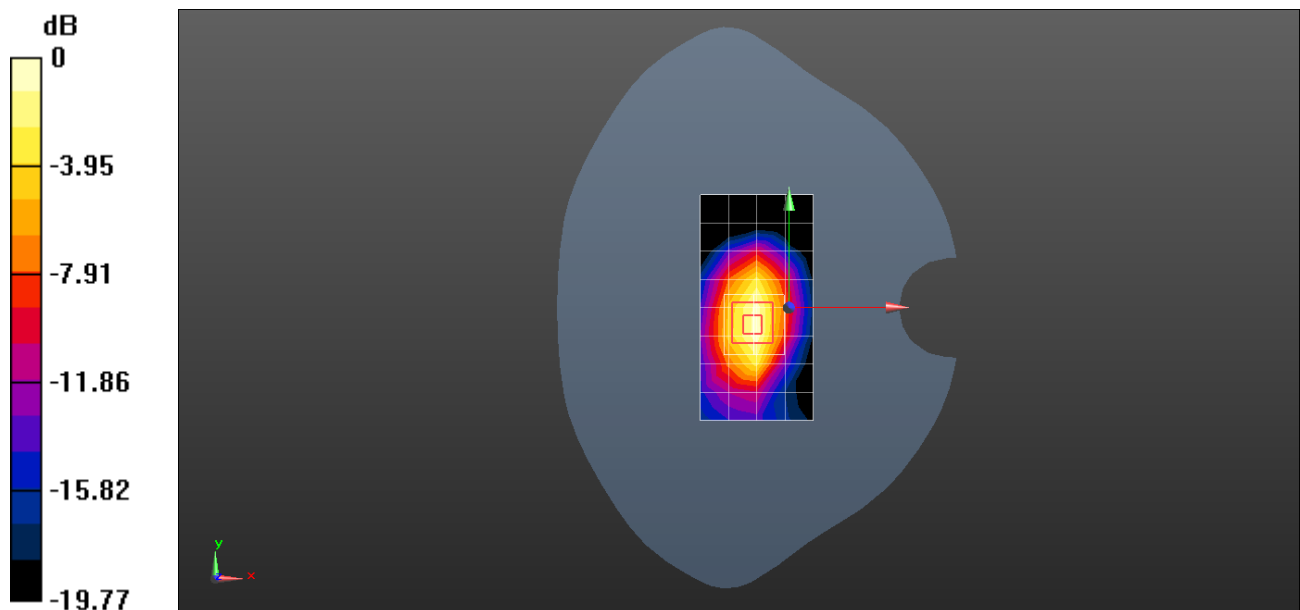

0 dB = 0.349 W/kg = -4.57 dBW/kg

Test Laboratory: HUAWEI SAR/HAC Lab

LON-L29 UMTS Band II 9262CH Left touch with Battery 2-Main Antenna

DUT: LON-L29; Type: Smart Phone; Serial: SAR2

Communication System: UID 0, HW-UMTS-FDD(WCDMA) (0); Frequency: 1852.4 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 1852.4$ MHz; $\sigma = 1.376$ S/m; $\epsilon_r = 39.849$; $\rho = 1000$ kg/m³

Phantom section: Left Section

DASY Configuration:

- ε Probe: EX3DV4 - SN3744; ConvF(7.74, 7.74, 7.74); Calibrated: 2016-7-26;
- ε Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- ε Electronics: DAE4 Sn1236; Calibrated: 2015-11-23
- ε Phantom: SAM4; Type: SAM; Serial: TP-1620
- ε DASY52 52.8.8(1258); SEMCAD X 14.6.10(7331)

Configuration/Head/Area Scan (8x13x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.650 W/kg

Configuration/Head/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm



Reference Value = 5.540 V/m; Power Drift = 0.06 dB

Peak SAR (extrapolated) = 0.734 W/kg

SAR(1 g) = 0.478 W/kg; SAR(10 g) = 0.300 W/kg

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.639 W/kg

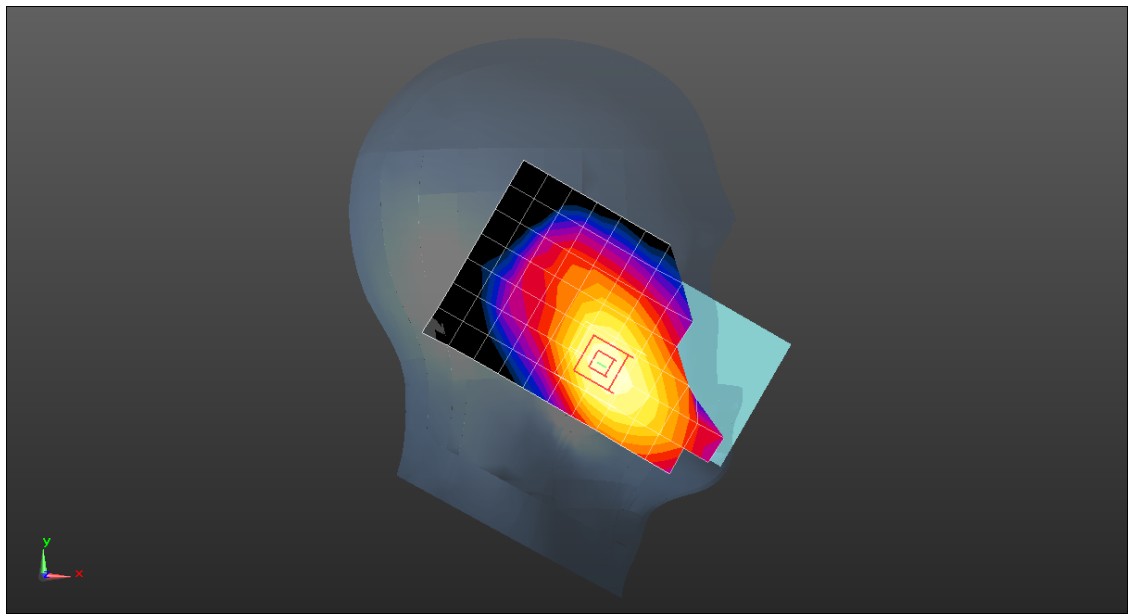

0 dB = 0.639 W/kg = -1.94 dBW/kg

Test Laboratory: HUAWEI SAR/HAC Lab

LON-L29 UMTS Band II 9400CH Back Side 15mm-Main Antenna

DUT: LON-L29; Type: Smart Phone; Serial: SAR2

Communication System: UID 0, HW-UMTS-FDD(WCDMA) (0); Frequency: 1880 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.492$ S/m; $\epsilon_r = 52.053$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- ε Probe: EX3DV4 - SN3744; ConvF(7.48, 7.48, 7.48); Calibrated: 2016-7-26;
- ε Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- ε Electronics: DAE4 Sn1236; Calibrated: 2015-11-23
- ε Phantom: SAM3; Type: SAM; Serial: TP-1597
- ε DASY52 52.8.8(1258); SEMCAD X 14.6.10(7331)

Configuration/Body/Area Scan (8x14x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 0.295 W/kg

Configuration/Body/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 7.565 V/m; Power Drift = -0.02 dB

Peak SAR (extrapolated) = 0.390 W/kg

SAR(1 g) = 0.221 W/kg; SAR(10 g) = 0.122 W/kg

Maximum value of SAR (measured) = 0.326 W/kg



Configuration/Body/Zoom Scan (5x5x7)/Cube 1: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 7.565 V/m; Power Drift = -0.02 dB

Peak SAR (extrapolated) = 0.294 W/kg

SAR(1 g) = 0.192 W/kg; SAR(10 g) = 0.125 W/kg

Maximum value of SAR (measured) = 0.257 W/kg

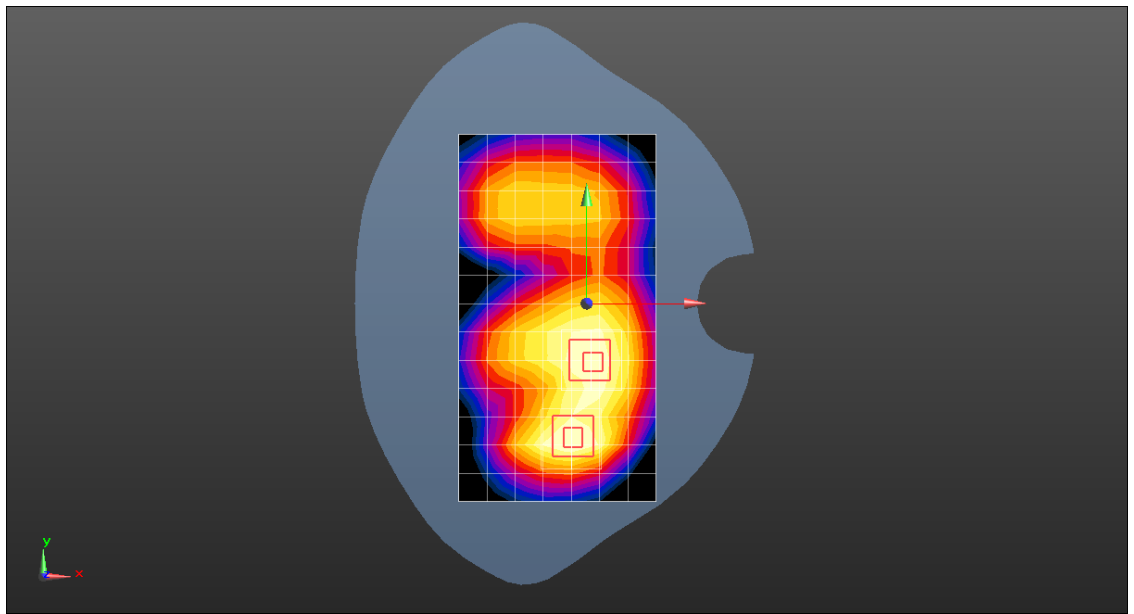

0 dB = 0.257 W/kg = -5.90 dBW/kg

Test Laboratory: HUAWEI SAR/HAC Lab

LON-L29 UMTS Band II 9400CH Bottom Side 10mm-Main Antenna

DUT: LON-L29; Type: Smart Phone; Serial: SAR2

Communication System: UID 0, HW-UMTS-FDD(WCDMA) (0); Frequency: 1880 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.492$ S/m; $\epsilon_r = 52.053$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- ε Probe: EX3DV4 - SN3744; ConvF(7.48, 7.48, 7.48); Calibrated: 2016-7-26;
- ε Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- ε Electronics: DAE4 Sn1236; Calibrated: 2015-11-23
- ε Phantom: SAM3; Type: SAM; Serial: TP-1597
- ε DASY52 52.8.8(1258); SEMCAD X 14.6.10(7331)

Configuration/Body/Area Scan (5x9x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 0.844 W/kg


Configuration/Body/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 20.51 V/m; Power Drift = 0.00 dB

Peak SAR (extrapolated) = 1.02 W/kg

SAR(1 g) = 0.570 W/kg; SAR(10 g) = 0.305 W/kg

Maximum value of SAR (measured) = 0.858 W/kg

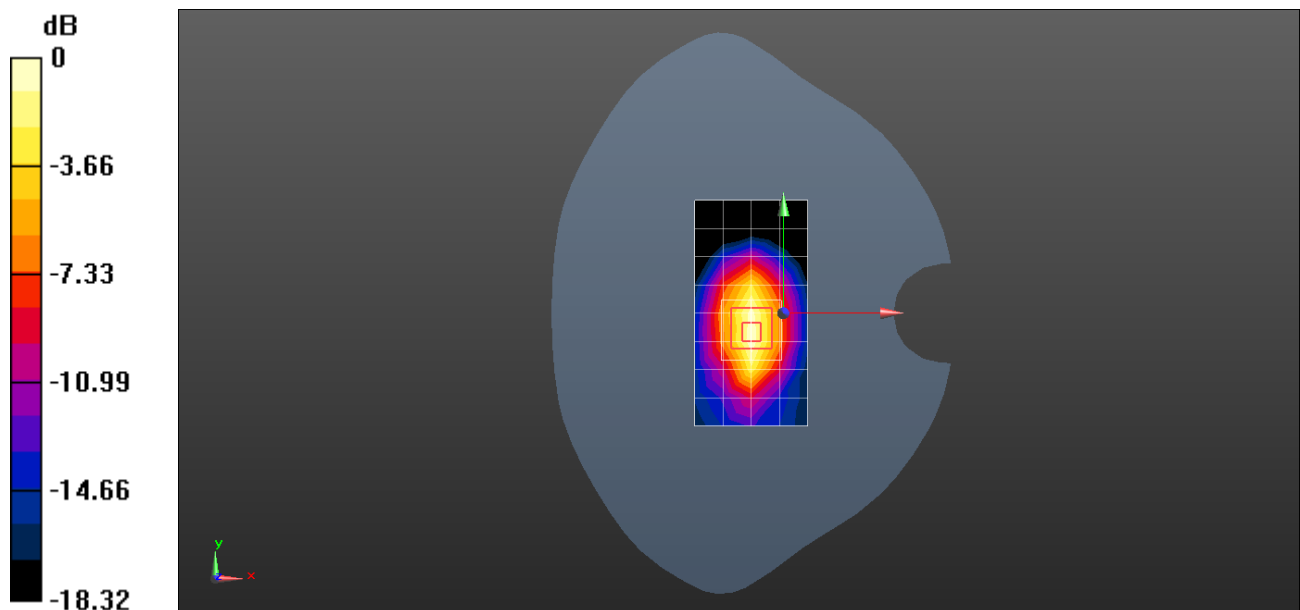

0 dB = 0.858 W/kg = -0.67 dBW/kg

Test Laboratory: HUAWEI SAR/HAC Lab

LON-L29 UMTS Band IV 1513CH Left touch with Battery 2-Main Antenna

DUT: LON-L29; Type: Smart Phone; Serial: SAR2

Communication System: UID 0, HW-UMTS-FDD(WCDMA) (0); Frequency: 1752.6 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1753$ MHz; $\sigma = 1.359$ S/m; $\epsilon_r = 39.495$; $\rho = 1000$ kg/m³

Phantom section: Left Section

DASY Configuration:

- ε Probe: EX3DV4 - SN3744; ConvF(8.09, 8.09, 8.09); Calibrated: 2016-7-26;
- ε Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- ε Electronics: DAE4 Sn1236; Calibrated: 2015-11-23
- ε Phantom: SAM4; Type: SAM; Serial: TP-1620
- ε DASY52 52.8.8(1258); SEMCAD X 14.6.10(7331)

Configuration/Head/Area Scan (8x13x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 0.686 W/kg


Configuration/Head/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 6.368 V/m; Power Drift = 0.11 dB

Peak SAR (extrapolated) = 0.805 W/kg

SAR(1 g) = 0.525 W/kg; SAR(10 g) = 0.333 W/kg

Maximum value of SAR (measured) = 0.692 W/kg

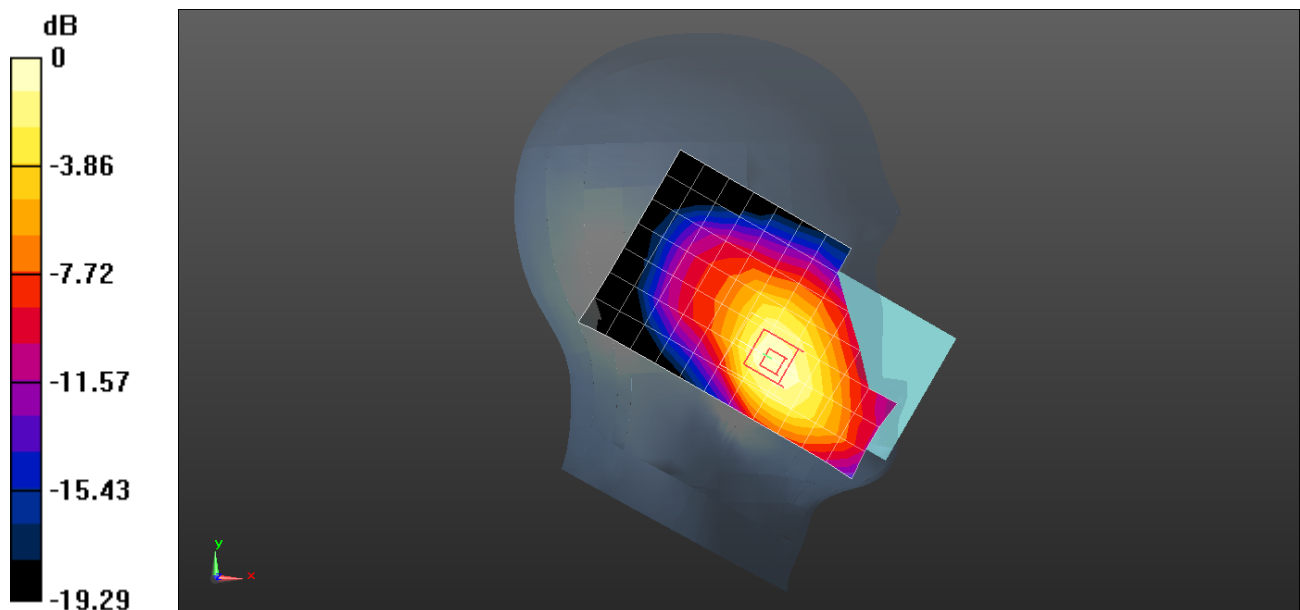

0 dB = 0.692 W/kg = -1.60 dBW/kg

Test Laboratory: HUAWEI SAR/HAC Lab

LON-L29 UMTS Band IV 1413CH Back Side 15mm with Battery 3-Main Antenna

DUT: LON-L29; Type: Smart Phone; Serial: SAR2

Communication System: UID 0, HW-UMTS-FDD(WCDMA) (0); Frequency: 1732.6 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1733$ MHz; $\sigma = 1.414$ S/m; $\epsilon_r = 53.819$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- ε Probe: EX3DV4 - SN3744; ConvF(7.61, 7.61, 7.61); Calibrated: 2016-7-26;
- ε Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- ε Electronics: DAE4 Sn1236; Calibrated: 2015-11-23
- ε Phantom: SAM3; Type: SAM; Serial: TP-1597
- ε DASY52 52.8.8(1258); SEMCAD X 14.6.10(7331)

Configuration/Body/Area Scan (8x14x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 0.763 W/kg


Configuration/Body/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 7.435 V/m; Power Drift = 0.08 dB

Peak SAR (extrapolated) = 0.945 W/kg

SAR(1 g) = 0.553 W/kg; SAR(10 g) = 0.299 W/kg

Maximum value of SAR (measured) = 0.742 W/kg

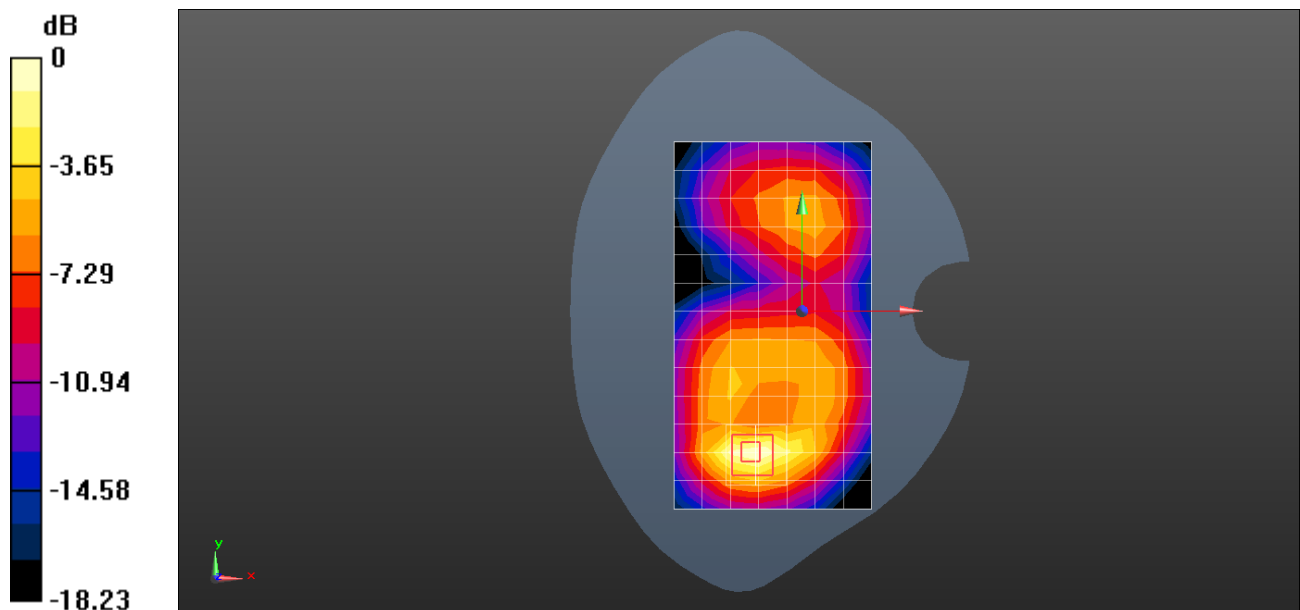

0 dB = 0.742 W/kg = -1.30 dBW/kg

Test Laboratory: HUAWEI SAR/HAC Lab

LON-L29 UMTS Band IV 1312CH Bottom Side 10mm-Main Antenna

DUT: LON-L29; Type: Smart Phone; Serial: SAR2

Communication System: UID 0, HW-UMTS-FDD(WCDMA) (0); Frequency: 1712.4 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 1712.4$ MHz; $\sigma = 1.395$ S/m; $\epsilon_r = 53.85$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- ε Probe: EX3DV4 - SN3744; ConvF(7.61, 7.61, 7.61); Calibrated: 2016-7-26;
- ε Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- ε Electronics: DAE4 Sn1236; Calibrated: 2015-11-23
- ε Phantom: SAM3; Type: SAM; Serial: TP-1597
- ε DASY52 52.8.8(1258); SEMCAD X 14.6.10(7331)

Configuration/Body/Area Scan (5x9x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 1.77 W/kg

Configuration/Body/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm


Reference Value = 27.10 V/m; Power Drift = 0.05 dB

Peak SAR (extrapolated) = 2.11 W/kg

SAR(1 g) = 1.21 W/kg; SAR(10 g) = 0.647 W/kg

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 1.75 W/kg

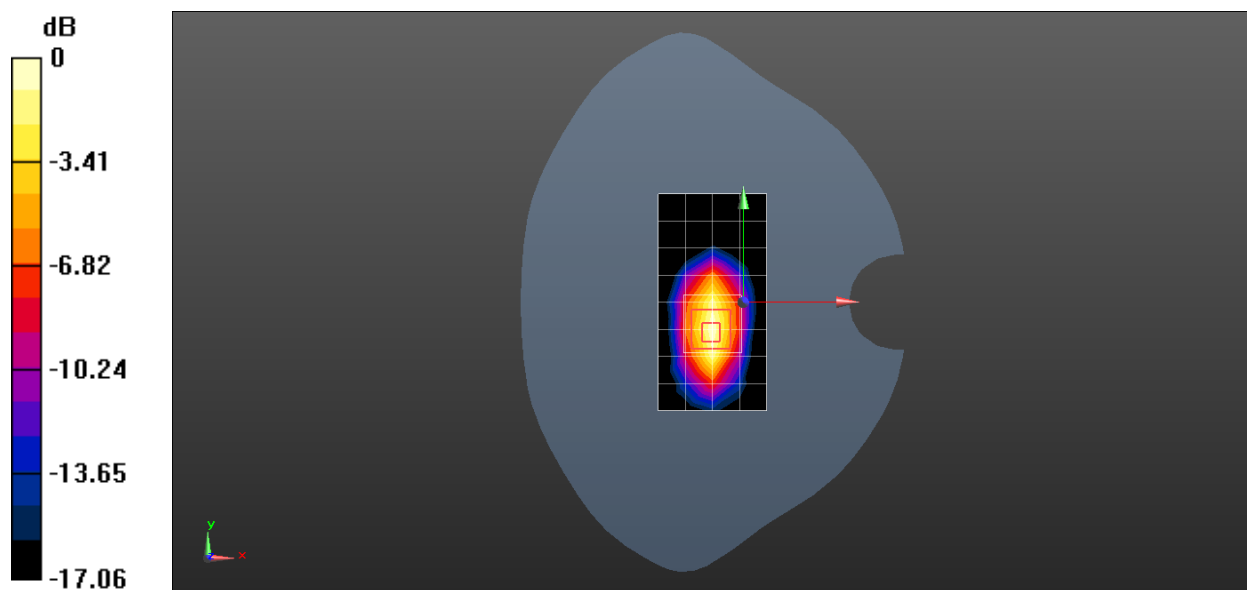

0 dB = 1.75 W/kg = 2.43 dBW/kg

Test Laboratory: HUAWEI SAR/HAC Lab

LON-L29 UMTS Band IV 1413CH Back Side 0mm-Main Antenna

DUT: LON-L29; Type: Smart Phone; Serial: SAR2

Communication System: UID 0, HW-UMTS-FDD(WCDMA) (0); Frequency: 1732.6 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1733$ MHz; $\sigma = 1.414$ S/m; $\epsilon_r = 53.819$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- ε Probe: EX3DV4 - SN3744; ConvF(7.61, 7.61, 7.61); Calibrated: 2016-7-26;
- ε Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- ε Electronics: DAE4 Sn1236; Calibrated: 2015-11-23
- ε Phantom: SAM3; Type: SAM; Serial: TP-1620
- ε DASY52 52.8.8(1258); SEMCAD X 14.6.10(7331)

Configuration/Body/Area Scan (9x14x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 5.47 W/kg


Configuration/Body/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 3.244 V/m; Power Drift = 0.07 dB

Peak SAR (extrapolated) = 13.4 W/kg

SAR(1 g) = 5.45 W/kg; SAR(10 g) = 2.52 W/kg

Maximum value of SAR (measured) = 10.3 W/kg

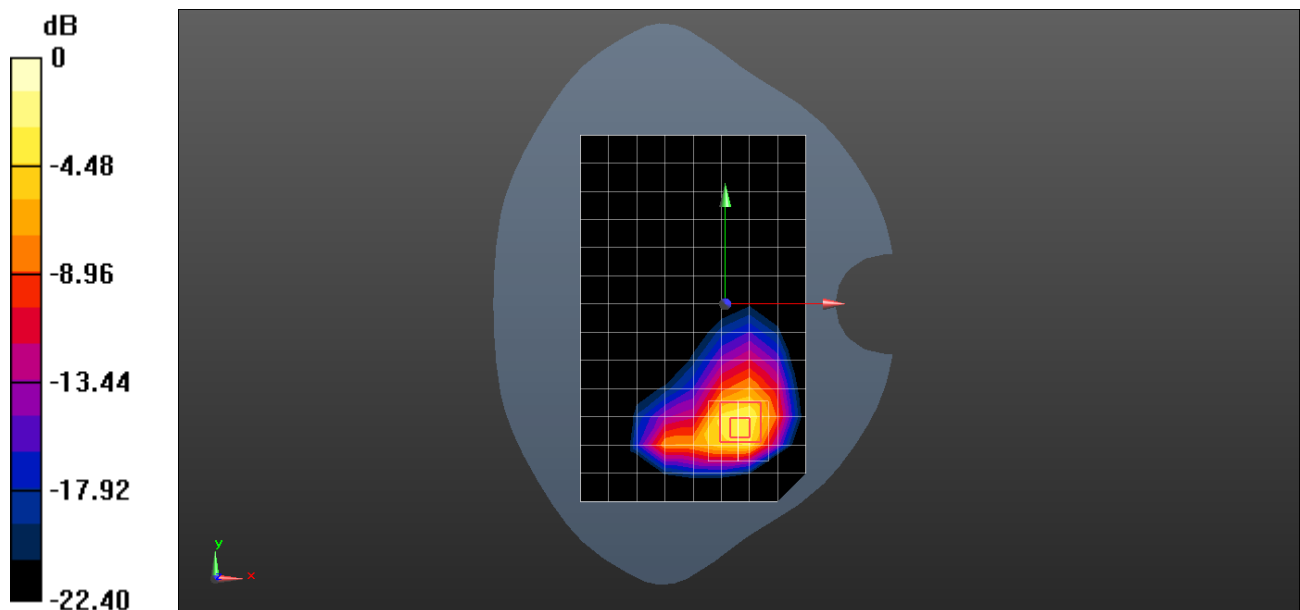

0 dB = 10.3 W/kg = 10.14 dBW/kg

Test Laboratory: HUAWEI SAR/HAC Lab

LON-L29 UMTS Band V 4233CH Right touch with Battery 2-Main Antenna

DUT: LON-L29; Type: Smart Phone; Serial: SAR1

Communication System: UID 0, HW-UMTS-FDD(WCDMA) (0); Frequency: 846.6 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 847$ MHz; $\sigma = 0.907$ S/m; $\epsilon_r = 41.551$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY Configuration:

- ε Probe: EX3DV4 - SN3736; ConvF(9.17, 9.17, 9.17); Calibrated: 2016-4-26;
- ε Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- ε Electronics: DAE4 Sn852; Calibrated: 2016-4-20
- ε Phantom: SAM1; Type: SAM; Serial: TP-1475
- ε DASY52 52.8.8(1258); SEMCAD X 14.6.10(7331)

Configuration/Head/Area Scan (8x13x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 0.218 W/kg


Configuration/Head/Zoom Scan (6x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 5.917 V/m; Power Drift = 0.18 dB

Peak SAR (extrapolated) = 0.252 W/kg

SAR(1 g) = 0.185 W/kg; SAR(10 g) = 0.139 W/kg

Maximum value of SAR (measured) = 0.224 W/kg

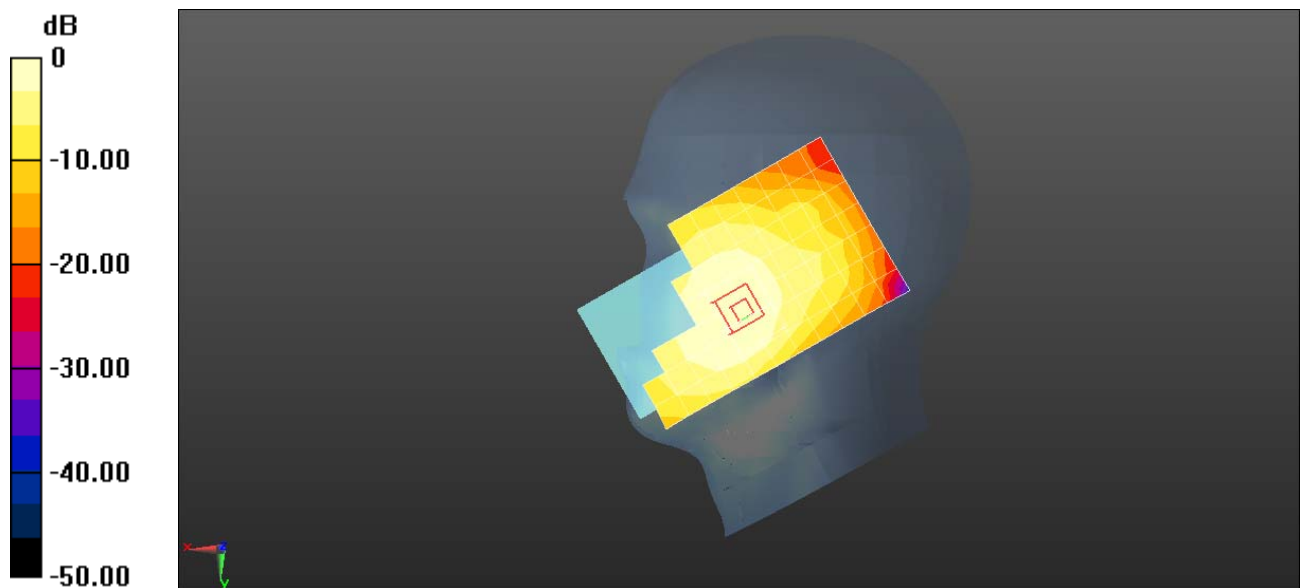

Test Laboratory: HUAWEI SAR/HAC Lab

LON-L29 UMTS Band V 4182CH Back Side 15mm with Battery 3-Main Antenna

DUT: LON-L29; Type: Smart Phone; Serial: SAR1

Communication System: UID 0, HW-UMTS-FDD(WCDMA) (0); Frequency: 836.4 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 836.4$ MHz; $\sigma = 1.005$ S/m; $\epsilon_r = 53.907$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- ε Probe: EX3DV4 - SN3736; ConvF(9.08, 9.08, 9.08); Calibrated: 2016-4-26;
- ε Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- ε Electronics: DAE4 Sn852; Calibrated: 2016-4-20
- ε Phantom: SAM2; Type: SAM; Serial: TP:1474
- ε DASY52 52.8.8(1258); SEMCAD X 14.6.10(7331)

Configuration/Body/Area Scan (8x13x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.169 W/kg

Configuration/Body/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm


Reference Value = 11.77 V/m; Power Drift = -0.05 dB

Peak SAR (extrapolated) = 0.185 W/kg

SAR(1 g) = 0.142 W/kg; SAR(10 g) = 0.108 W/kg

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.172 W/kg

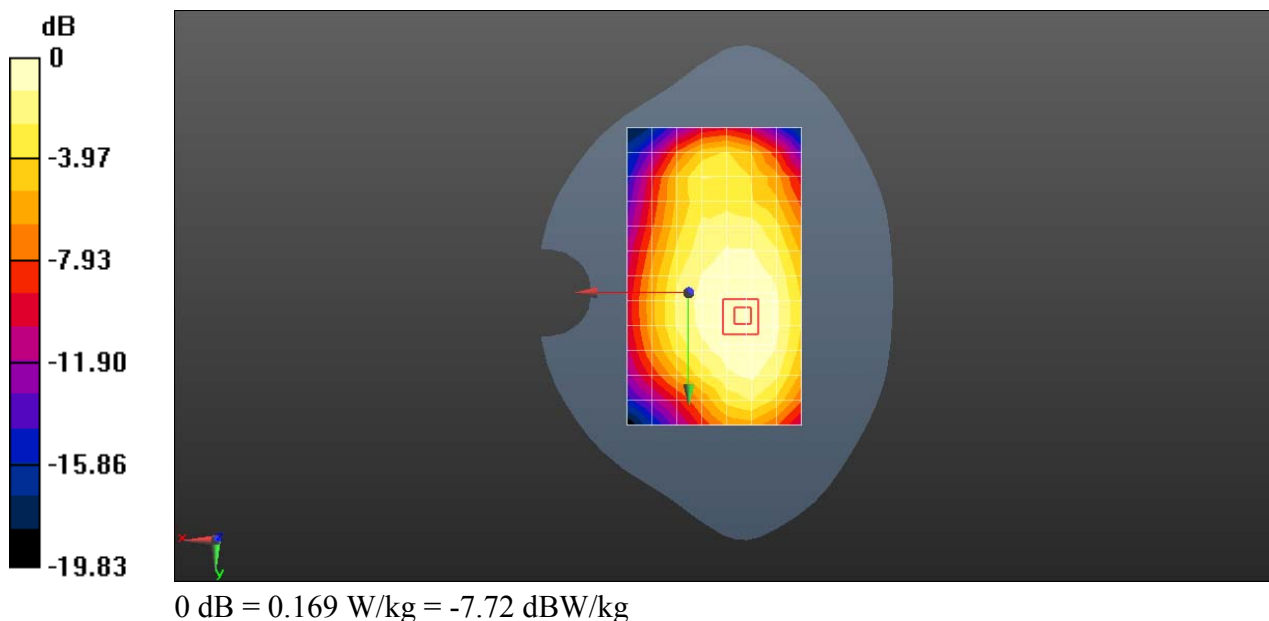

Test Laboratory: HUAWEI SAR/HAC Lab

LON-L29 UMTS Band V 4182CH Right Side 10mm with Battery 3-Main Antenna

DUT: LON-L29; Type: Smart Phone; Serial: SAR1

Communication System: UID 0, HW-UMTS-FDD(WCDMA) (0); Frequency: 836.4 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 836.4$ MHz; $\sigma = 1.005$ S/m; $\epsilon_r = 53.907$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- ε Probe: EX3DV4 - SN3736; ConvF(9.08, 9.08, 9.08); Calibrated: 2016-4-26;
- ε Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- ε Electronics: DAE4 Sn852; Calibrated: 2016-4-20
- ε Phantom: SAM2; Type: SAM; Serial: TP:1474
- ε DASY52 52.8.8(1258); SEMCAD X 14.6.10(7331)

Configuration/Body/Area Scan (6x13x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.224 W/kg

Configuration/Body/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm


Reference Value = 14.07 V/m; Power Drift = -0.02 dB

Peak SAR (extrapolated) = 0.282 W/kg

SAR(1 g) = 0.192 W/kg; SAR(10 g) = 0.131 W/kg

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.252 W/kg

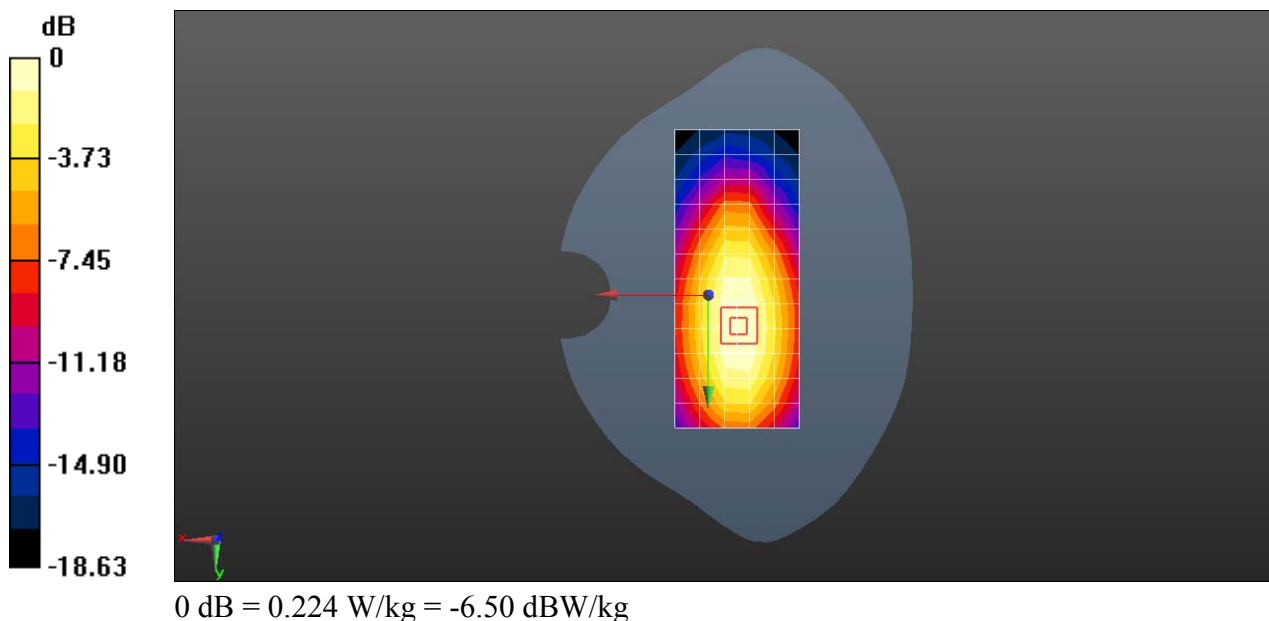

Test Laboratory: HUAWEI SAR/HAC Lab

LON-L29 LTE Band II 20M QPSK 1RB 50 offset 19100CH Left touch-Main Antenna

DUT: LON-L29; Type: Smart Phone; Serial: SAR2

Communication System: UID 0, LTE-FDD (SC-FDMA, 20MHz, QPSK/16-QAM) (0); Frequency: 1900 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1900$ MHz; $\sigma = 1.434$ S/m; $\epsilon_r = 38.711$; $\rho = 1000$ kg/m³

Phantom section: Left Section

DASY Configuration:

- ε Probe: EX3DV4 - SN3744; ConvF(7.74, 7.74, 7.74); Calibrated: 2016-7-26;
- ε Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- ε Electronics: DAE4 Sn1236; Calibrated: 2015-11-23
- ε Phantom: SAM4; Type: SAM; Serial: TP-1620
- ε DASY52 52.8.8(1258); SEMCAD X 14.6.10(7331)

Configuration/Head/Area Scan (8x13x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 0.787 W/kg


Configuration/Head/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 6.212 V/m; Power Drift = 0.18 dB

Peak SAR (extrapolated) = 0.983 W/kg

SAR(1 g) = 0.611 W/kg; SAR(10 g) = 0.373 W/kg

Maximum value of SAR (measured) = 0.843 W/kg

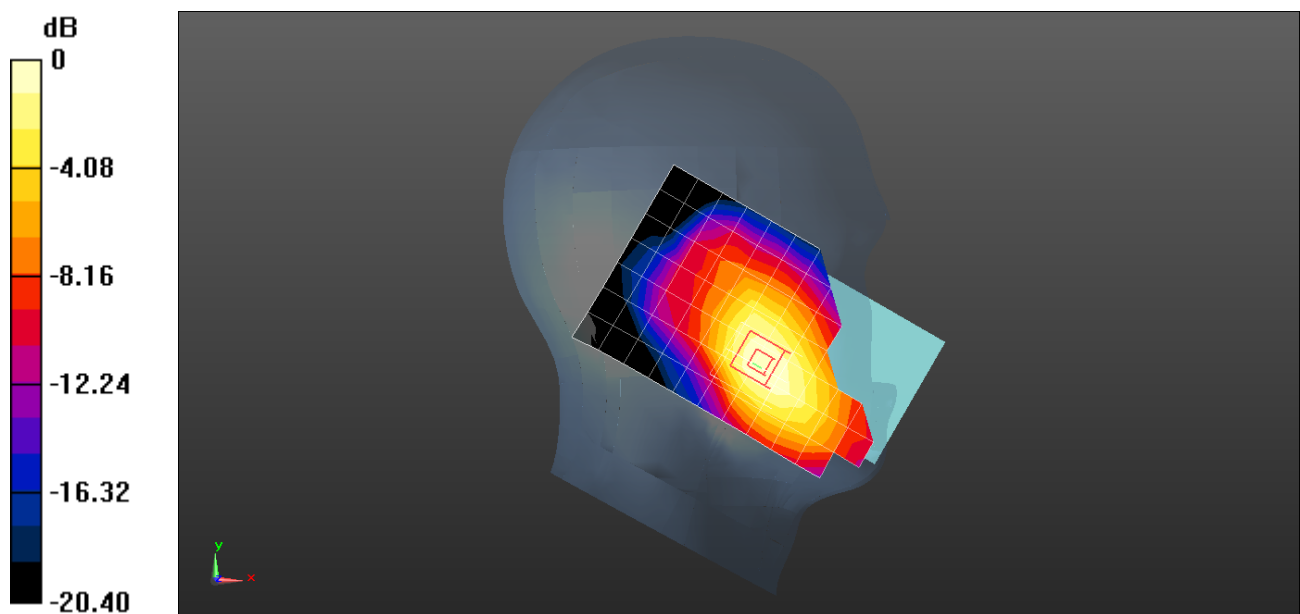

0 dB = 0.843 W/kg = -0.74 dBW/kg

Test Laboratory: HUAWEI SAR/HAC Lab

LON-L29 LTE Band II QPSK 1RB 50 offset 18900CH Back Side 15mm-Main Antenna

DUT: LON-L29; Type: Smart Phone; Serial: SAR2

Communication System: UID 0, LTE-FDD (SC-FDMA, 20MHz, QPSK/16-QAM) (0); Frequency: 1880 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1880 \text{ MHz}$; $\sigma = 1.492 \text{ S/m}$; $\epsilon_r = 52.053$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY Configuration:

- ε Probe: EX3DV4 - SN3744; ConvF(7.48, 7.48, 7.48); Calibrated: 2016-7-26;
- ε Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- ε Electronics: DAE4 Sn1236; Calibrated: 2015-11-23
- ε Phantom: SAM3; Type: SAM; Serial: TP-1597
- ε DASY52 52.8.8(1258); SEMCAD X 14.6.10(7331)

Configuration/Body/Area Scan (8x14x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (measured) = 0.290 W/kg

Configuration/Body/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 7.314 V/m ; Power Drift = -0.19 dB

Peak SAR (extrapolated) = 0.410 W/kg

SAR(1 g) = 0.232 W/kg ; SAR(10 g) = 0.128 W/kg

Maximum value of SAR (measured) = 0.346 W/kg



Configuration/Body/Zoom Scan (5x5x7)/Cube 1: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 7.314 V/m ; Power Drift = -0.19 dB

Peak SAR (extrapolated) = 0.293 W/kg

SAR(1 g) = 0.193 W/kg ; SAR(10 g) = 0.126 W/kg

Maximum value of SAR (measured) = 0.257 W/kg

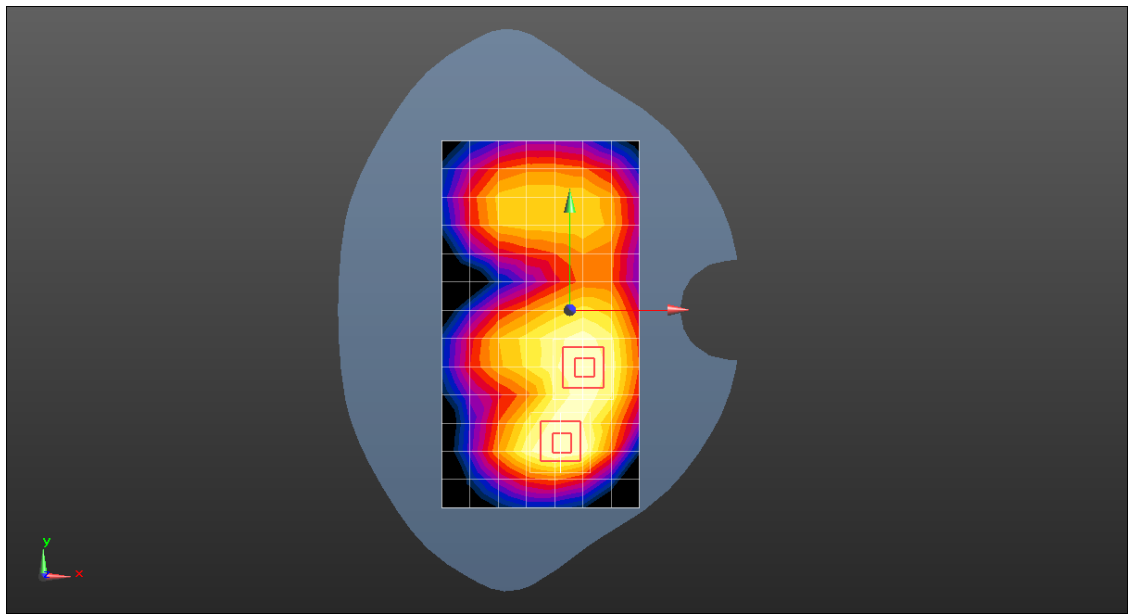

0 dB = 0.257 W/kg = -5.90 dBW/kg

Test Laboratory: HUAWEI SAR/HAC Lab

LON-L29 LTE Band II QPSK 1RB 50 offset 18900CH Bottom Side 10mm-Main Antenna

DUT: LON-L29; Type: Smart Phone; Serial: SAR2

Communication System: UID 0, LTE-FDD (SC-FDMA, 20MHz, QPSK/16-QAM) (0); Frequency: 1880 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.492$ S/m; $\epsilon_r = 52.053$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- ε Probe: EX3DV4 - SN3744; ConvF(7.48, 7.48, 7.48); Calibrated: 2016-7-26;
- ε Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- ε Electronics: DAE4 Sn1236; Calibrated: 2015-11-23
- ε Phantom: SAM3; Type: SAM; Serial: TP-1597
- ε DASY52 52.8.8(1258); SEMCAD X 14.6.10(7331)

Configuration/Body/Area Scan (5x9x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 0.726 W/kg


Configuration/Body/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 19.91 V/m; Power Drift = 0.17 dB

Peak SAR (extrapolated) = 0.996 W/kg

SAR(1 g) = 0.557 W/kg; SAR(10 g) = 0.298 W/kg

Maximum value of SAR (measured) = 0.835 W/kg

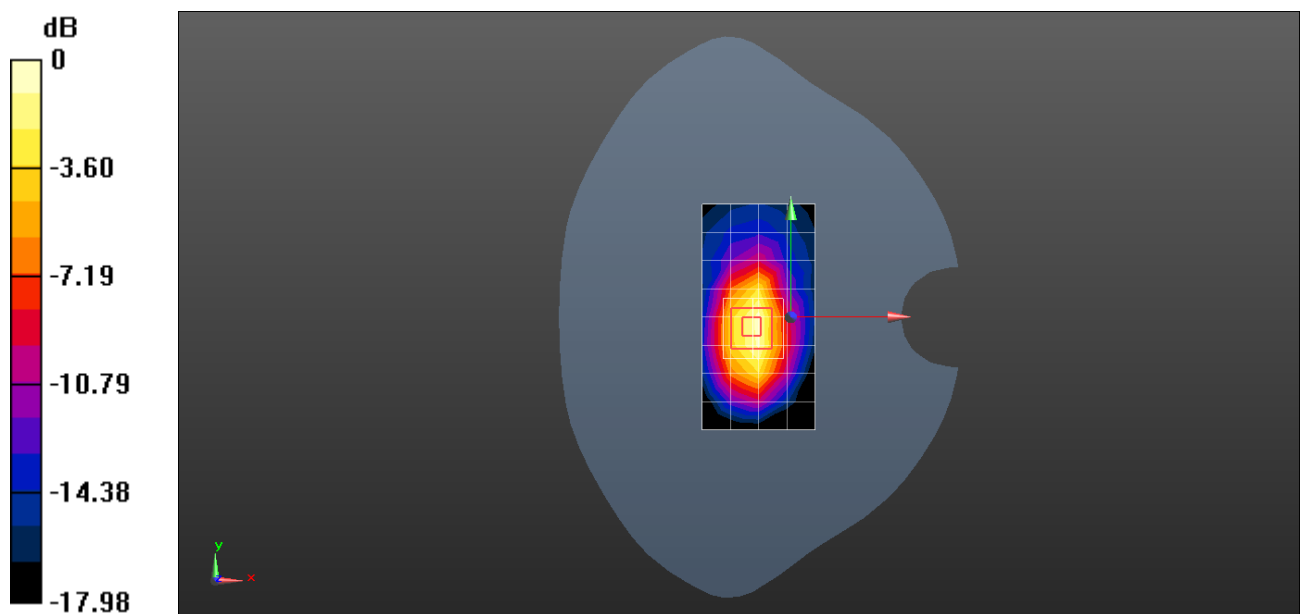

Test Laboratory: HUAWEI SAR/HAC Lab

LON-L29 LTE Band IV 20M QPSK 1RB 50 offset 20175CH Left touch with Battery 2-Main Antenna

DUT: LON-L29; Type: Smart Phone; Serial: SAR2

Communication System: UID 0, LTE-FDD (SC-FDMA, 20MHz, QPSK/16-QAM) (0); Frequency: 1732.5 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 1732.5$ MHz; $\sigma = 1.337$ S/m; $\epsilon_r = 39.551$; $\rho = 1000$ kg/m³

Phantom section: Left Section

DASY Configuration:

- ε Probe: EX3DV4 - SN3744; ConvF(8.09, 8.09, 8.09); Calibrated: 2016-7-26;
- ε Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- ε Electronics: DAE4 Sn1236; Calibrated: 2015-11-23
- ε Phantom: SAM4; Type: SAM; Serial: TP-1620
- ε DASY52 52.8.8(1258); SEMCAD X 14.6.10(7331)

Configuration/Body/Area Scan (8x13x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.530 W/kg

Configuration/Body/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm


Reference Value = 5.939 V/m; Power Drift = 0.14 dB

Peak SAR (extrapolated) = 0.617 W/kg

SAR(1 g) = 0.404 W/kg; SAR(10 g) = 0.257 W/kg

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.535 W/kg

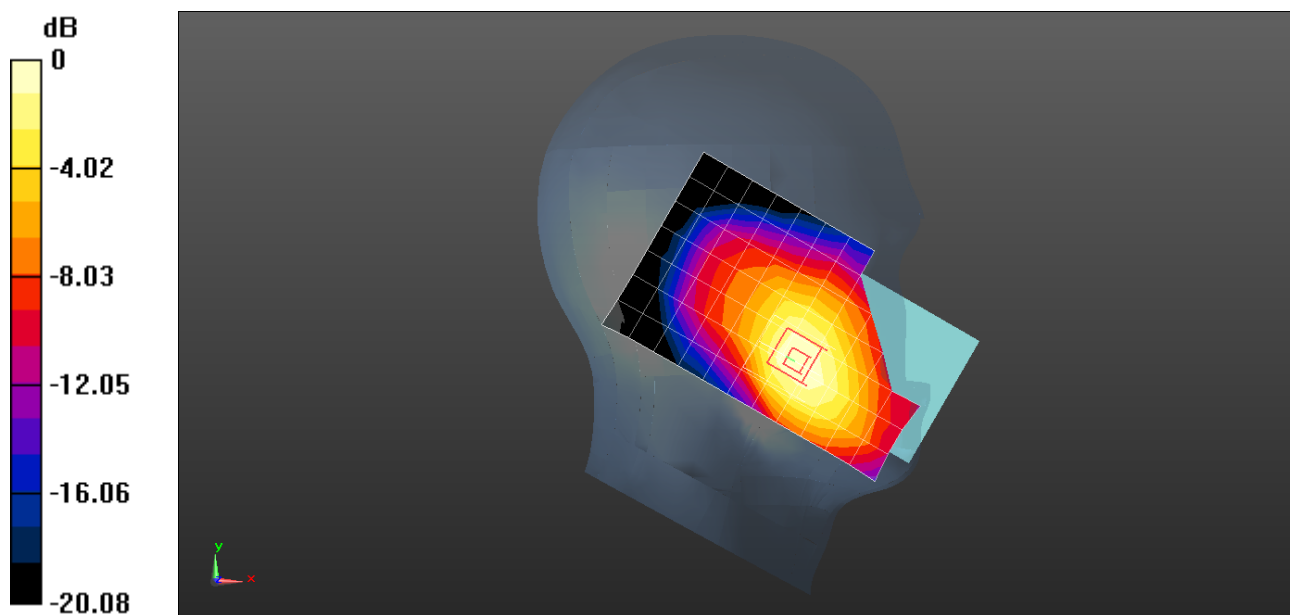

Test Laboratory: HUAWEI SAR/HAC Lab

LON-L29 LTE Band IV 20M QPSK 1RB 50 offset 20300CH Back Side 15mm-Main Antenna

DUT: LON-L29; Type: Smart Phone; Serial: SAR2

Communication System: UID 0, LTE-FDD (SC-FDMA, 20MHz, QPSK/16-QAM) (0); Frequency: 1745 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1745$ MHz; $\sigma = 1.425$ S/m; $\epsilon_r = 53.752$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- ε Probe: EX3DV4 - SN3744; ConvF(7.61, 7.61, 7.61); Calibrated: 2016-7-26;
- ε Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- ε Electronics: DAE4 Sn1236; Calibrated: 2015-11-23
- ε Phantom: SAM3; Type: SAM; Serial: TP-1597
- ε DASY52 52.8.8(1258); SEMCAD X 14.6.10(7331)

Configuration/Body/Area Scan (8x14x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 0.606 W/kg


Configuration/Body/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 7.269 V/m; Power Drift = 0.03 dB

Peak SAR (extrapolated) = 0.719 W/kg

SAR(1 g) = 0.426 W/kg; SAR(10 g) = 0.232 W/kg

Maximum value of SAR (measured) = 0.598 W/kg

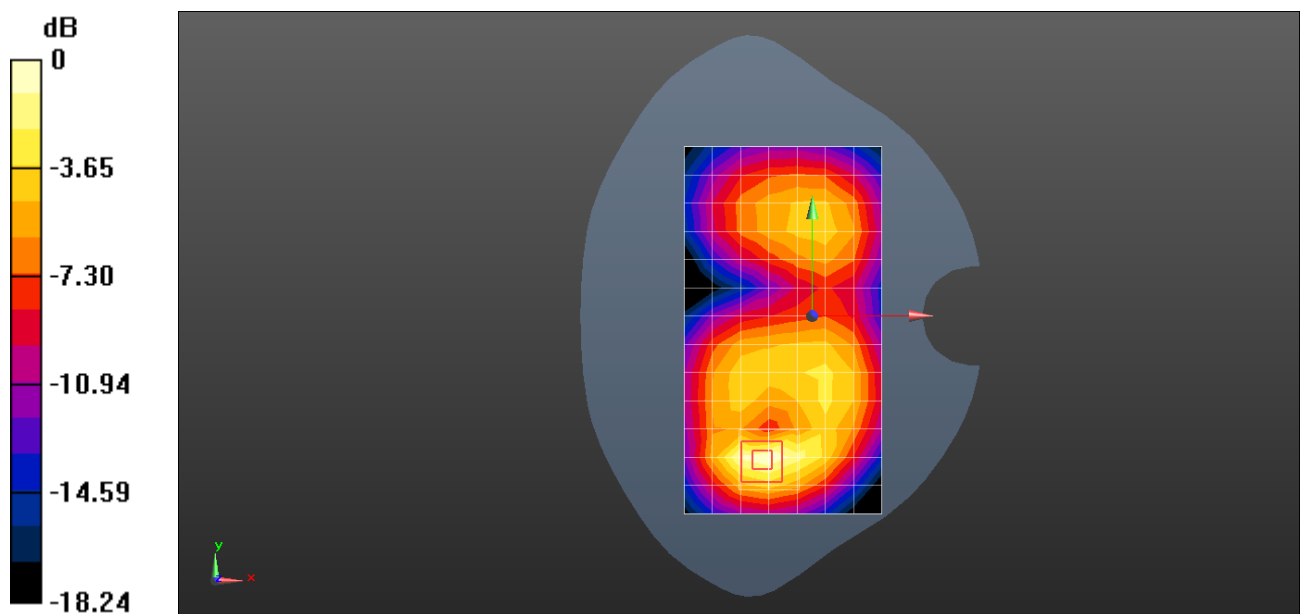

Test Laboratory: HUAWEI SAR/HAC Lab

LON-L29 LTE Band IV 20M QPSK 50RB 25 offset 20300CH Bottom Side 10mm- Main Antenna

DUT: LON-L29; Type: Smart Phone; Serial: SAR2

Communication System: UID 0, LTE-FDD (SC-FDMA, 20MHz, QPSK/16-QAM) (0); Frequency: 1745 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1745$ MHz; $\sigma = 1.425$ S/m; $\epsilon_r = 53.752$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- ε Probe: EX3DV4 - SN3744; ConvF(7.61, 7.61, 7.61); Calibrated: 2016-7-26;
- ε Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- ε Electronics: DAE4 Sn1236; Calibrated: 2015-11-23
- ε Phantom: SAM3; Type: SAM; Serial: TP-1597
- ε DASY52 52.8.8(1258); SEMCAD X 14.6.10(7331)

Configuration/Body/Area Scan (5x9x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 0.742 W/kg


Configuration/Body/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 19.55 V/m; Power Drift = 0.09 dB

Peak SAR (extrapolated) = 1.27 W/kg

SAR(1 g) = 0.720 W/kg; SAR(10 g) = 0.384 W/kg

Maximum value of SAR (measured) = 1.05 W/kg

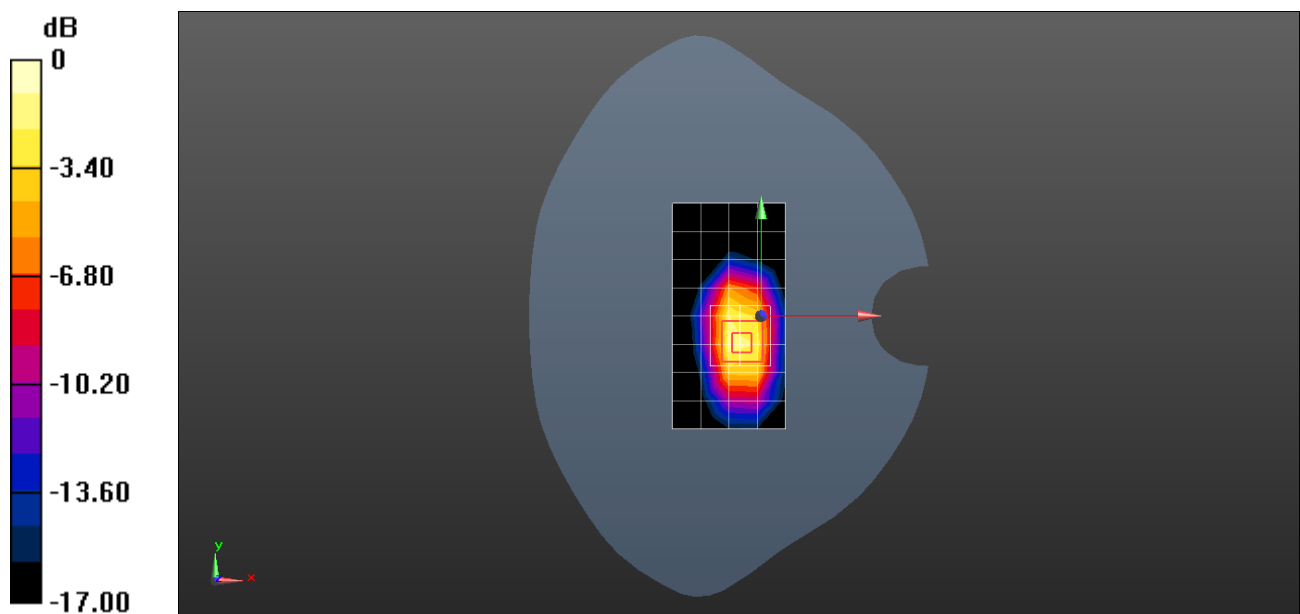

0 dB = 1.05 W/kg = 0.21 dBW/kg

Test Laboratory: HUAWEI SAR/HAC Lab

LON-L29 LTE Band V 10M QPSK 1RB 25 offset 20525CH Right touch with Battery 3-Main Antenna

DUT: LON-L29; Type: Smart Phone; Serial: SAR1

Communication System: UID 0, LTE-FDD (SC-FDMA, 10MHz, QPSK/16-QAM) (0); Frequency: 836.5 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 836.5$ MHz; $\sigma = 0.905$ S/m; $\epsilon_r = 41.561$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY Configuration:

- ε Probe: EX3DV4 - SN3736; ConvF(9.17, 9.17, 9.17); Calibrated: 2016-4-26;
- ε Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- ε Electronics: DAE4 Sn852; Calibrated: 2016-4-20
- ε Phantom: SAM1; Type: SAM; Serial: TP-1475
- ε DASY52 52.8.8(1258); SEMCAD X 14.6.10(7331)

Configuration/Head/Area Scan (8x13x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.194 W/kg

Configuration/Head/Zoom Scan (6x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm


Reference Value = 6.198 V/m; Power Drift = 0.09 dB

Peak SAR (extrapolated) = 0.230 W/kg

SAR(1 g) = 0.169 W/kg; SAR(10 g) = 0.127 W/kg

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.206 W/kg

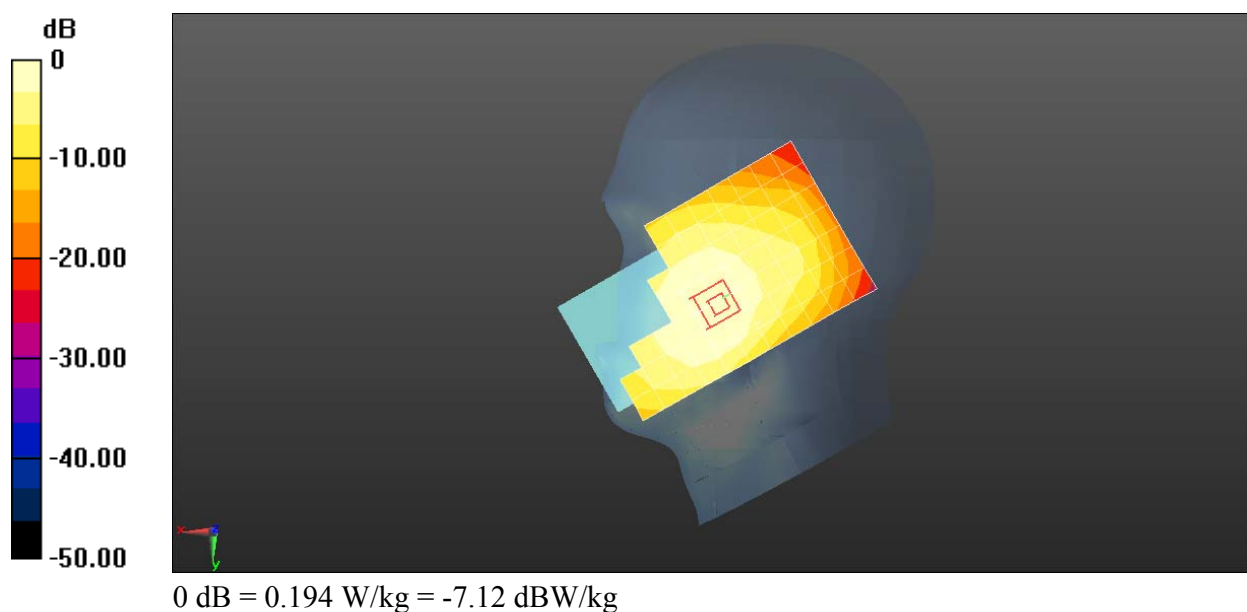

Test Laboratory: HUAWEI SAR/HAC Lab

LON-L29 LTE Band V 10M QPSK 1RB 25 offset 20600CH Back Side 15mm with Battery 2-Main Antenna

DUT: LON-L29; Type: Smart Phone; Serial: SAR1

Communication System: UID 0, LTE-FDD (SC-FDMA, 10MHz, QPSK/16-QAM) (0); Frequency: 844 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 844 \text{ MHz}$; $\sigma = 0.986 \text{ S/m}$; $\epsilon_r = 53.748$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY Configuration:

- ε Probe: EX3DV4 - SN3736; ConvF(9.08, 9.08, 9.08); Calibrated: 2016-4-26;
- ε Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- ε Electronics: DAE4 Sn852; Calibrated: 2016-4-20
- ε Phantom: SAM2; Type: SAM; Serial: TP:1474
- ε DASY52 52.8.8(1258); SEMCAD X 14.6.10(7331)

Configuration/Body/Area Scan (8x13x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (measured) = 0.156 W/kg


Configuration/Body/Zoom Scan (6x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 11.69 V/m ; Power Drift = 0.07 dB

Peak SAR (extrapolated) = 0.173 W/kg

SAR(1 g) = 0.131 W/kg ; SAR(10 g) = 0.099 W/kg

Maximum value of SAR (measured) = 0.158 W/kg

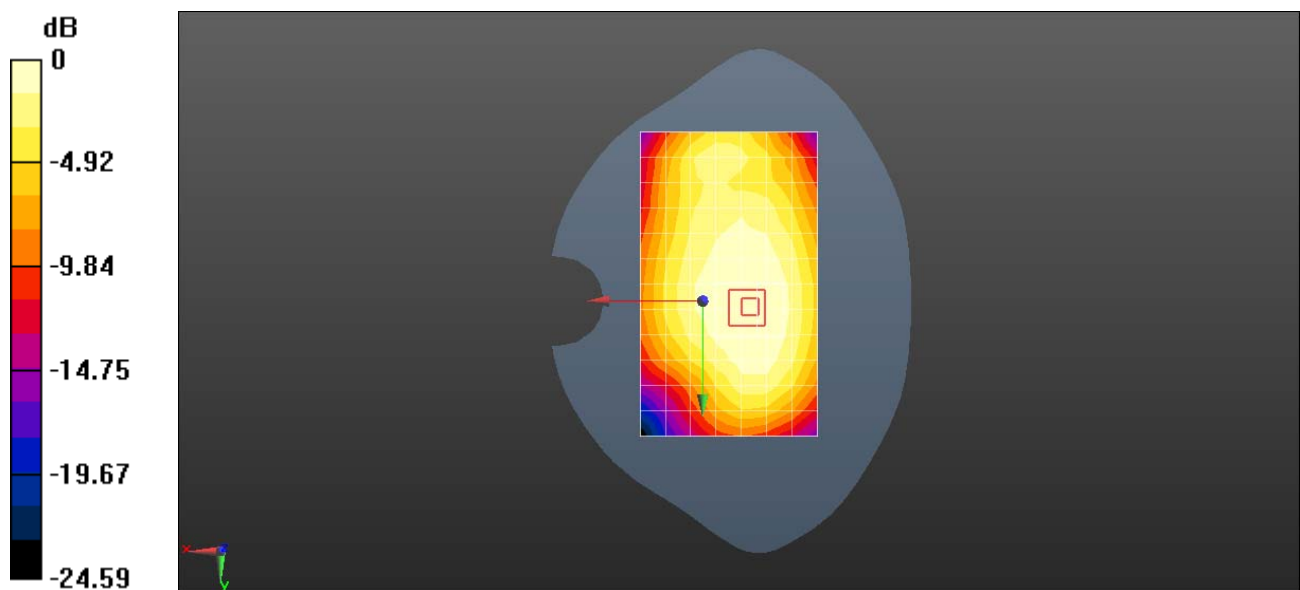

0 dB = 0.156 W/kg = -8.07 dBW/kg

Test Laboratory: HUAWEI SAR/HAC Lab

LON-L29 LTE Band V 10M QPSK 1RB 25 offset 20600CH Right Side 10mm with Battery 2-Main Antenna

DUT: LON-L29; Type: Smart Phone; Serial: SAR1

Communication System: UID 0, LTE-FDD (SC-FDMA, 10MHz, QPSK/16-QAM) (0); Frequency: 844 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 844 \text{ MHz}$; $\sigma = 0.986 \text{ S/m}$; $\epsilon_r = 53.748$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY Configuration:

- ε Probe: EX3DV4 - SN3736; ConvF(9.08, 9.08, 9.08); Calibrated: 2016-4-26;
- ε Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- ε Electronics: DAE4 Sn852; Calibrated: 2016-4-20
- ε Phantom: SAM2; Type: SAM; Serial: TP:1474
- ε DASY52 52.8.8(1258); SEMCAD X 14.6.10(7331)

Configuration/Body/Area Scan (5x13x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (measured) = 0.257 W/kg


Configuration/Body/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 14.64 V/m ; Power Drift = -0.01 dB

Peak SAR (extrapolated) = 0.290 W/kg

SAR(1 g) = 0.197 W/kg ; SAR(10 g) = 0.133 W/kg

Maximum value of SAR (measured) = 0.259 W/kg

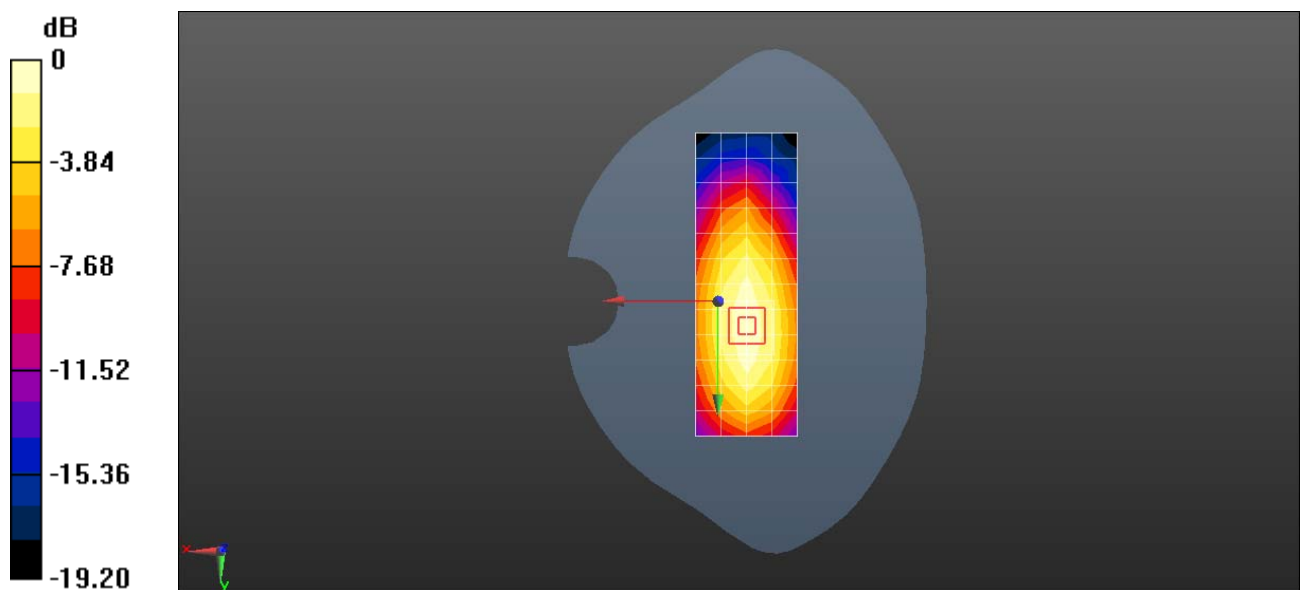

Test Laboratory: HUAWEI SAR Lab

LON LTE BandVII 20M QPSK 1RB 50 offset 21100 Left touch with Battery 2-Main antenna

DUT: LON-L29; Type: Smart Phone; Serial: SAR3

Communication System: UID 0, LTE-FDD (SC-FDMA, 20MHz, QPSK/16-QAM) (0); Frequency: 2535 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 2535$ MHz; $\sigma = 1.863$ S/m; $\epsilon_r = 40.644$; $\rho = 1000$ kg/m³

Phantom section: Left Section

DASY Configuration:

- ε Probe: EX3DV4 - SN7346; ConvF(7.16, 7.16, 7.16); Calibrated: 2016-6-23;
- ε Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- ε Electronics: DAE4 Sn914; Calibrated: 2016-1-7
- ε Phantom: SAM5; Type: QD000P40CD; Serial: TP:1894
- ε DASY52 52.8.8(1258); SEMCAD X 14.6.10(7331)

Configuration/Head/Area Scan (10x16x1): Measurement grid: $dx=12$ mm, $dy=12$ mm

Maximum value of SAR (measured) = 0.134 W/kg


Configuration/Head/Zoom Scan (8x9x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 0.7420 V/m; Power Drift = 0.12 dB

Peak SAR (extrapolated) = 0.174 W/kg

SAR(1 g) = 0.097 W/kg; SAR(10 g) = 0.056 W/kg

Maximum value of SAR (measured) = 0.144 W/kg

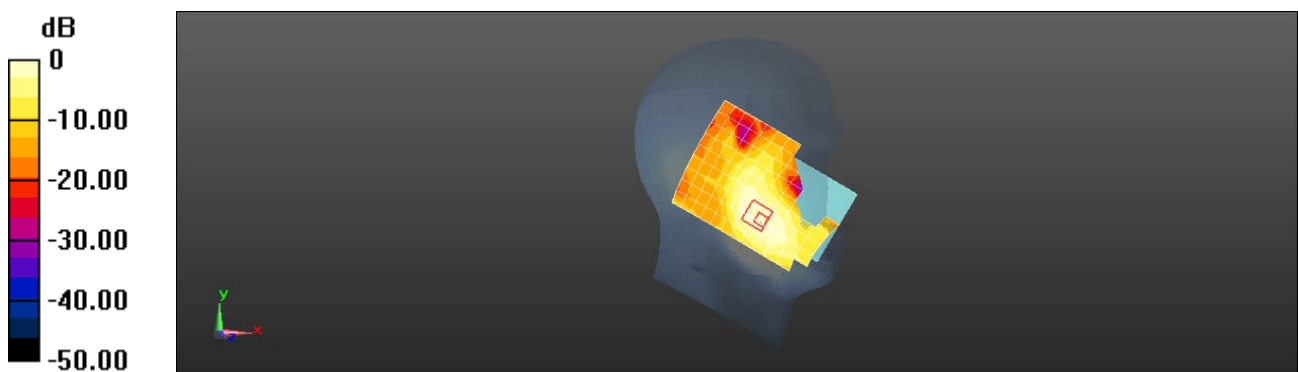

0 dB = 0.134 W/kg = -8.73 dBW/kg

Test Laboratory: HUAWEI SAR/HAC Lab

LON LTE Band VII 20M QPSK 1RB 50 offset 20850 Back side 15mm with battery2 -Main antenna

DUT: LON-L29; Type: Smart Phone; Serial: SAR3

Communication System: UID 0, LTE-FDD (SC-FDMA, 20MHz, QPSK/16-QAM) (0); Frequency: 2510 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 2510$ MHz; $\sigma = 2.063$ S/m; $\epsilon_r = 54.879$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- ε Probe: EX3DV4 - SN7346; ConvF(7.28, 7.28, 7.28); Calibrated: 2016-6-23;
- ε Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- ε Electronics: DAE4 Sn914; Calibrated: 2016/1/7
- ε Phantom: SAM6; Type: QD 000 P40 CD; Serial: 1892
- ε DASY52 52.8.8(1222); SEMCAD X 14.6.10(7373)

Configuration/Body/Area Scan (10x16x1): Measurement grid: $dx=12$ mm, $dy=12$ mm

Maximum value of SAR (measured) = 0.193 W/kg


Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 3.570 V/m; Power Drift = -0.14 dB

Peak SAR (extrapolated) = 0.268 W/kg

SAR(1 g) = 0.140 W/kg; SAR(10 g) = 0.068 W/kg

Maximum value of SAR (measured) = 0.215 W/kg

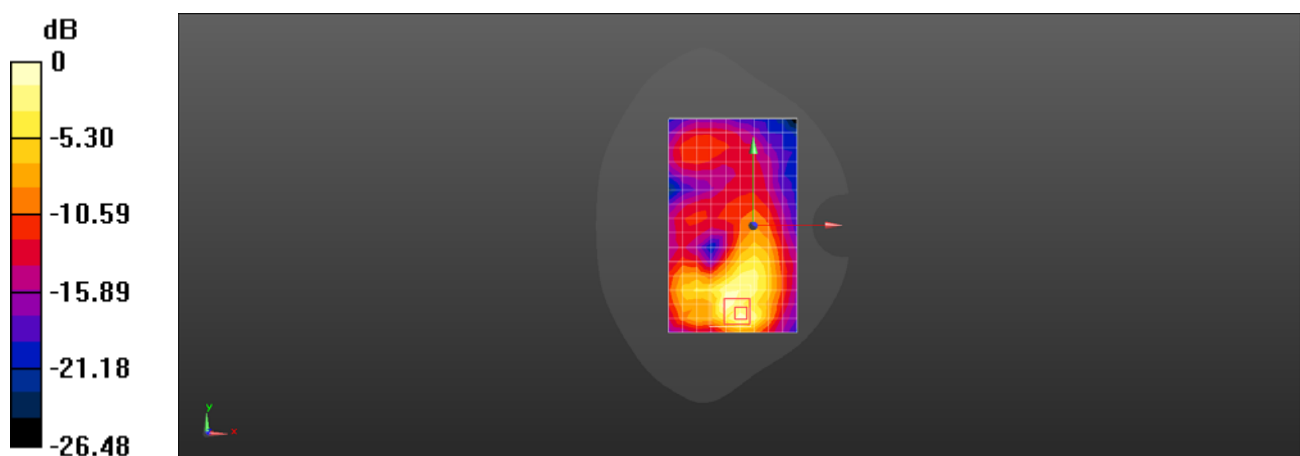

0 dB = 0.193 W/kg = -7.15 dBW/kg

Test Laboratory: HUAWEI SAR/HAC Lab

**LON LTE Band VII 20M QPSK 1RB 50 offset 21100 Back side 10mm with battery
2-Main antenna**

DUT: LON-L29; Type: Smart Phone; Serial: SAR3

Communication System: UID 0, LTE-FDD (SC-FDMA, 20MHz, QPSK/16-QAM) (0); Frequency: 2535 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 2535$ MHz; $\sigma = 2.086$ S/m; $\epsilon_r = 54.913$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- ε Probe: EX3DV4 - SN7346; ConvF(7.28, 7.28, 7.28); Calibrated: 2016-6-23;
- ε Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- ε Electronics: DAE4 Sn914; Calibrated: 2016/1/7
- ε Phantom: SAM6; Type: QD 000 P40 CD; Serial: 1892
- ε DASY52 52.8.8(1222); SEMCAD X 14.6.10(7373)

Configuration/Body/Area Scan (10x16x1): Measurement grid: $dx=12$ mm, $dy=12$ mm

Maximum value of SAR (measured) = 0.330 W/kg


Configuration/Body/Zoom Scan (8x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 2.599 V/m; Power Drift = 0.12 dB

Peak SAR (extrapolated) = 0.415 W/kg

SAR(1 g) = 0.197 W/kg; SAR(10 g) = 0.086 W/kg

Maximum value of SAR (measured) = 0.331 W/kg

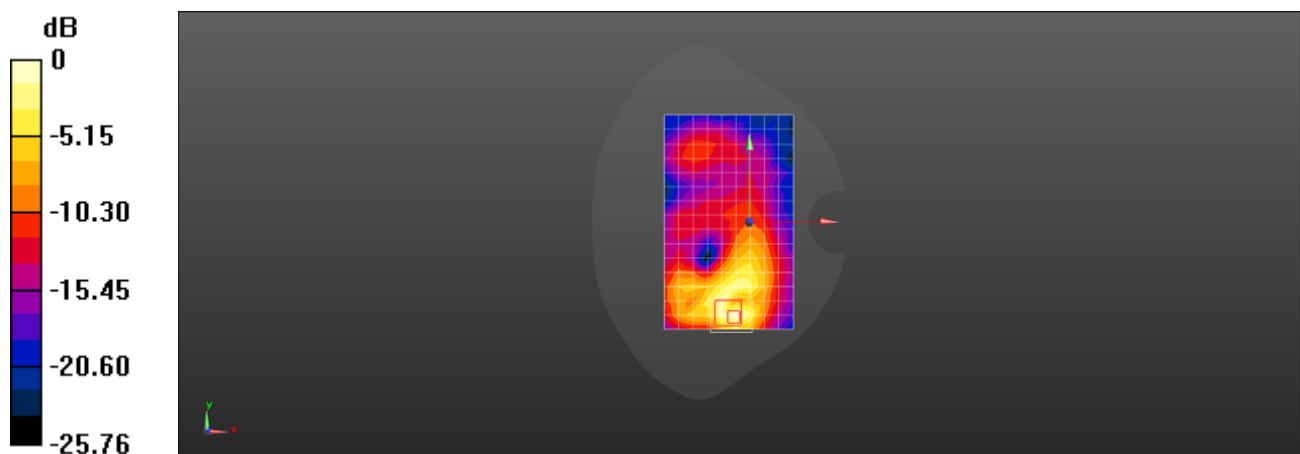

0 dB = 0.330 W/kg = -4.81 dBW/kg

Test Laboratory: HUAWEI SAR/HAC Lab

LON-L29 LTE Band XII 10M QPSK 1RB 25 offset 23060CH Right touch-Main Antenna

DUT: LON-L29; Type: Smart Phone; Serial: SAR2

Communication System: UID 0, LTE-FDD (SC-FDMA, 10MHz, QPSK/16-QAM) (0); Frequency: 704 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 704 \text{ MHz}$; $\sigma = 0.861 \text{ S/m}$; $\epsilon_r = 42.746$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Right Section

DASY Configuration:

- ε Probe: EX3DV4 - SN3744; ConvF(9.7, 9.7, 9.7); Calibrated: 2016-7-26;
- ε Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- ε Electronics: DAE4 Sn1236; Calibrated: 2015-11-23
- ε Phantom: SAM3; Type: SAM; Serial: TP-1597
- ε DASY52 52.8.8(1258); SEMCAD X 14.6.10(7331)

Configuration/Head/Area Scan (8x13x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (measured) = 0.162 W/kg


Configuration/Head/Zoom Scan (6x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 5.140 V/m ; Power Drift = 0.19 dB

Peak SAR (extrapolated) = 0.184 W/kg

SAR(1 g) = 0.149 W/kg ; SAR(10 g) = 0.117 W/kg

Maximum value of SAR (measured) = 0.172 W/kg

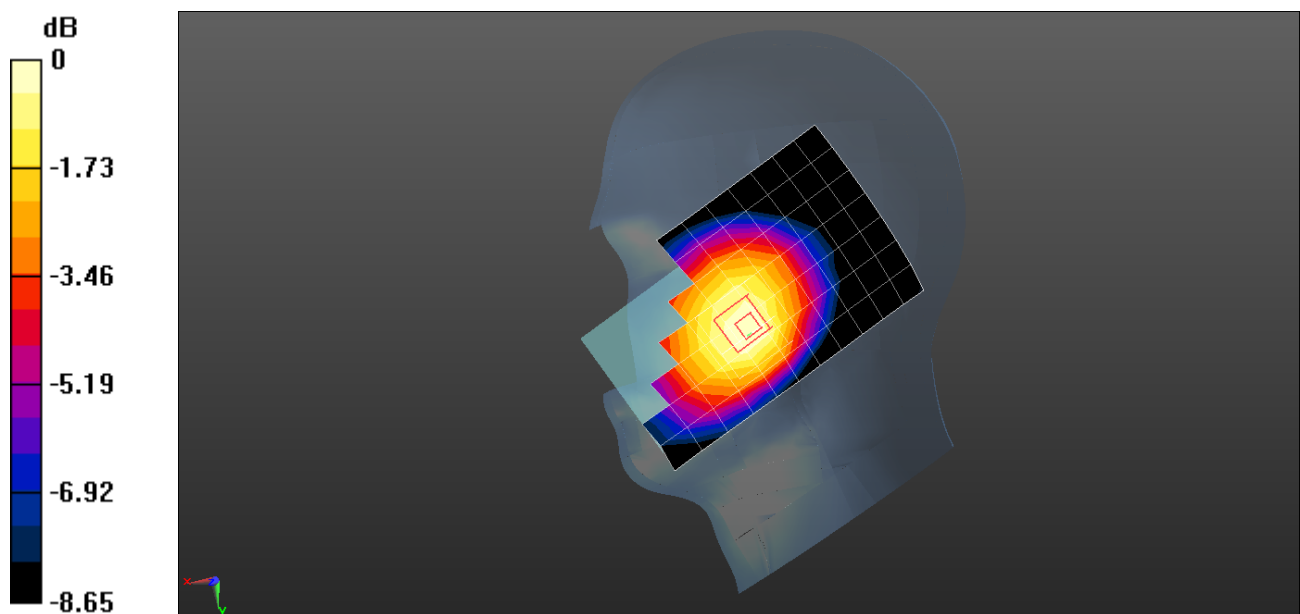

0 dB = 0.172 W/kg = -7.64 dBW/kg

Test Laboratory: HUAWEI SAR/HAC Lab

LON-L29 LTE Band XII 10M QPSK 1RB 25 offset 23130CH Back Side 15mm with Battery 3-Main Antenna

DUT: LON-L29; Type: Smart Phone; Serial: SAR2

Communication System: UID 0, LTE-FDD (SC-FDMA, 10MHz, QPSK/16-QAM) (0); Frequency: 711 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 711 \text{ MHz}$; $\sigma = 0.927 \text{ S/m}$; $\epsilon_r = 53.651$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY Configuration:

- ε Probe: EX3DV4 - SN3744; ConvF(9.03, 9.03, 9.03); Calibrated: 2016-7-26;
- ε Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- ε Electronics: DAE4 Sn1236; Calibrated: 2015-11-23
- ε Phantom: SAM4; Type: SAM; Serial: TP-1620
- ε DASY52 52.8.8(1258); SEMCAD X 14.6.10(7331)

Configuration/Body/Area Scan (8x14x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (measured) = 0.178 W/kg


Configuration/Body/Zoom Scan (6x6x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 12.25 V/m ; Power Drift = 0.04 dB

Peak SAR (extrapolated) = 0.198 W/kg

SAR(1 g) = 0.145 W/kg ; SAR(10 g) = 0.109 W/kg

Maximum value of SAR (measured) = 0.177 W/kg

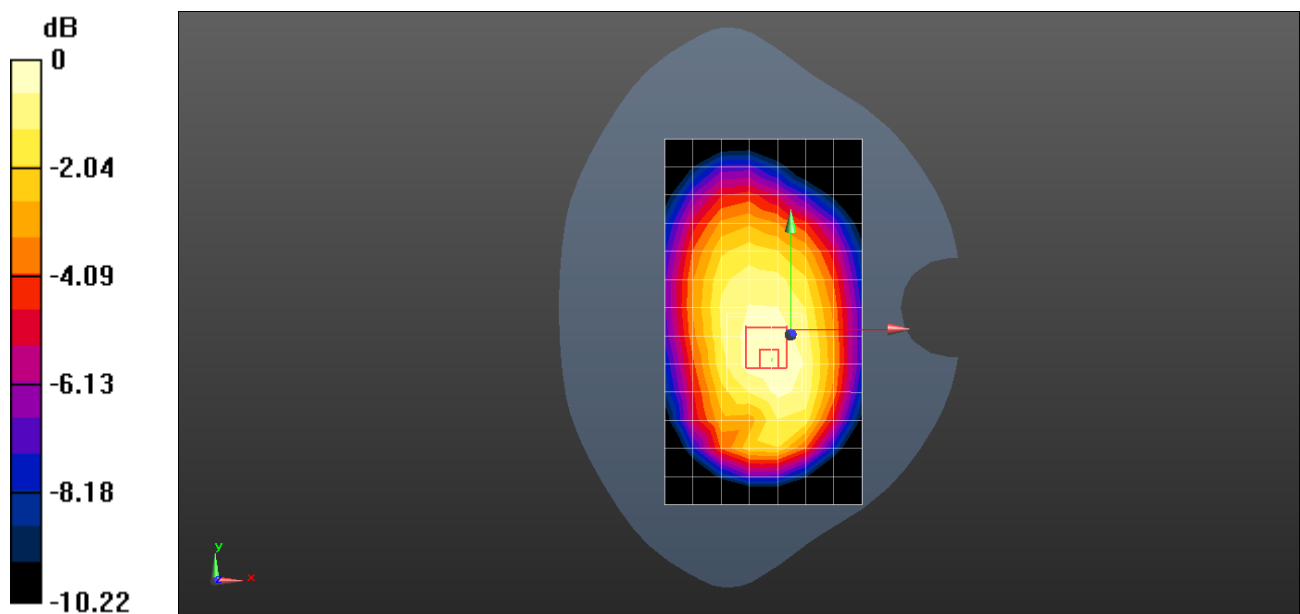

Test Laboratory: HUAWEI SAR/HAC Lab

LON-L29 LTE Band XII 10M QPSK 1RB 25 offset 23130CH Back Side 10mm-Main Antenna

DUT: LON-L29; Type: Smart Phone; Serial: SAR2

Communication System: UID 0, LTE-FDD (SC-FDMA, 10MHz, QPSK/16-QAM) (0); Frequency: 711 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 711 \text{ MHz}$; $\sigma = 0.927 \text{ S/m}$; $\epsilon_r = 53.651$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY Configuration:

- ε Probe: EX3DV4 - SN3744; ConvF(9.03, 9.03, 9.03); Calibrated: 2016-7-26;
- ε Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- ε Electronics: DAE4 Sn1236; Calibrated: 2015-11-23
- ε Phantom: SAM4; Type: SAM; Serial: TP-1620
- ε DASY52 52.8.8(1258); SEMCAD X 14.6.10(7331)

Configuration/Body/Area Scan (8x14x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (measured) = 0.228 W/kg


Configuration/Body/Zoom Scan (7x10x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 12.61 V/m ; Power Drift = 0.11 dB

Peak SAR (extrapolated) = 0.306 W/kg

SAR(1 g) = 0.183 W/kg ; SAR(10 g) = 0.133 W/kg

Maximum value of SAR (measured) = 0.254 W/kg

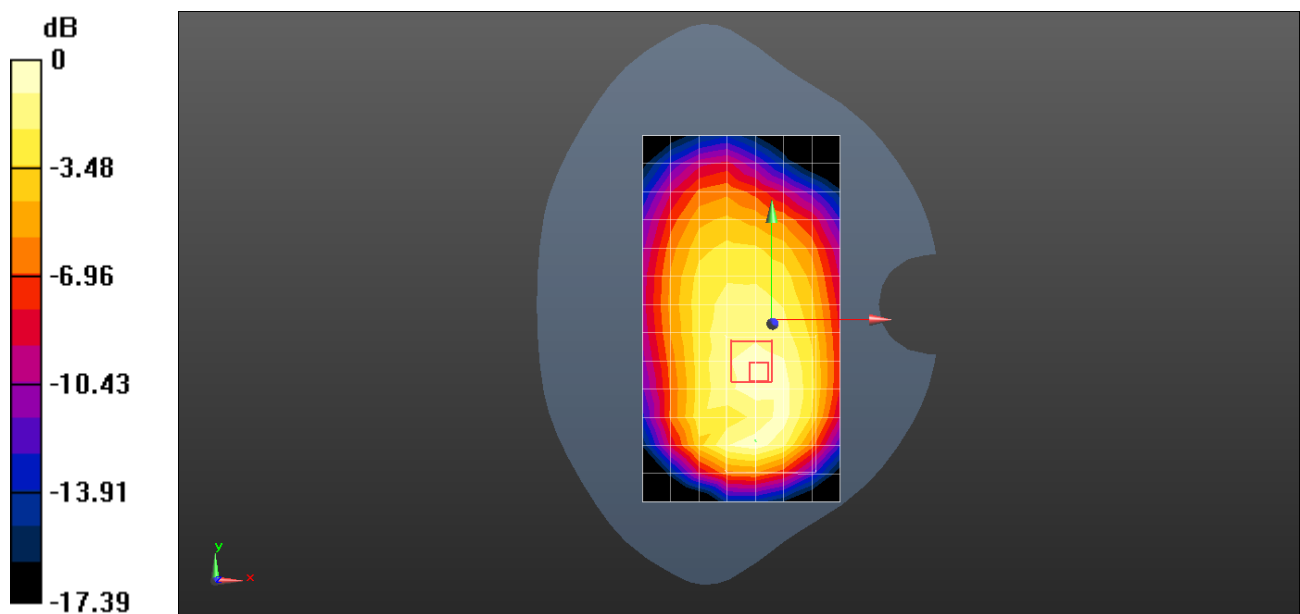

0 dB = 0.254 W/kg = -5.95 dBW/kg

Test Laboratory: HUAWEI SAR/HAC Lab

LON-L29 LTE Band XXVI 15M QPSK 1RB 38 offset 26965CH Right touch with Battery 2-Main Antenna

DUT: LON-L29; Type: Smart Phone; Serial: SAR1

Communication System: UID 0, LTE-FDD (SC-FDMA, 15MHz, QPSK/16-QAM) (0); Frequency: 841.5 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 841.5$ MHz; $\sigma = 0.906$ S/m; $\epsilon_r = 41.62$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY Configuration:

- ε Probe: EX3DV4 - SN3736; ConvF(9.17, 9.17, 9.17); Calibrated: 2016-4-26;
- ε Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- ε Electronics: DAE4 Sn852; Calibrated: 2016-4-20
- ε Phantom: SAM1; Type: SAM; Serial: TP-1475
- ε DASY52 52.8.8(1258); SEMCAD X 14.6.10(7331)

Configuration/Head/Area Scan (8x13x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.189 W/kg

Configuration/Head/Zoom Scan (5x6x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm


Reference Value = 6.085 V/m; Power Drift = 0.08 dB

Peak SAR (extrapolated) = 0.217 W/kg

SAR(1 g) = 0.159 W/kg; SAR(10 g) = 0.120 W/kg

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.191 W/kg

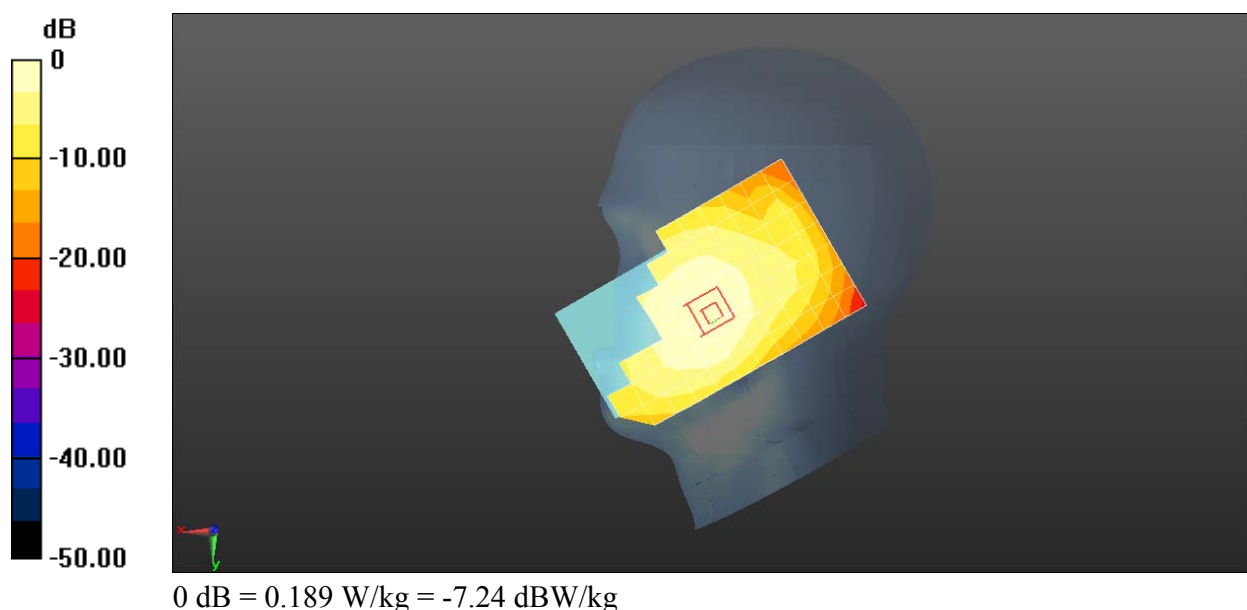

Test Laboratory: HUAWEI SAR/HAC Lab

LON-L29 LTE Band XXVI 15M QPSK 1RB 38 offset 26965CH Back Side 15mm with Battery 2-Main Antenna

DUT: LON-L29; Type: Smart Phone; Serial: SAR1

Communication System: UID 0, LTE-FDD (SC-FDMA, 15MHz, QPSK/16-QAM) (0); Frequency: 841.5 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 841.5$ MHz; $\sigma = 0.985$ S/m; $\epsilon_r = 53.77$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- ε Probe: EX3DV4 - SN3736; ConvF(9.08, 9.08, 9.08); Calibrated: 2016-4-26;
- ε Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- ε Electronics: DAE4 Sn852; Calibrated: 2016-4-20
- ε Phantom: SAM2; Type: SAM; Serial: TP:1474
- ε DASY52 52.8.8(1258); SEMCAD X 14.6.10(7331)

Configuration/Body/Area Scan (8x13x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.179 W/kg

Configuration/Body/Zoom Scan (6x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm


Reference Value = 12.19 V/m; Power Drift = 0.06 dB

Peak SAR (extrapolated) = 0.199 W/kg

SAR(1 g) = 0.150 W/kg; SAR(10 g) = 0.114 W/kg

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.182 W/kg

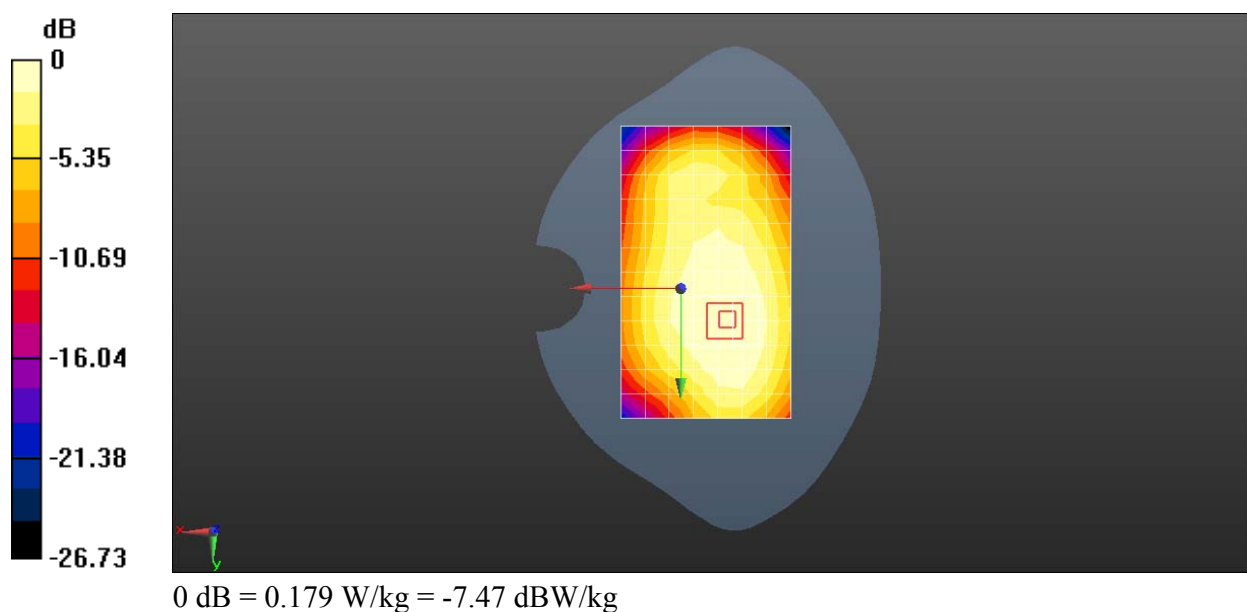

Test Laboratory: HUAWEI SAR/HAC Lab

LON-L29 LTE Band XXVI 15M QPSK 1RB 38 offset 26965CH Right Side 10mm with Battery 3-Main Antenna

DUT: LON-L29; Type: Smart Phone; Serial: SAR1

Communication System: UID 0, LTE-FDD (SC-FDMA, 15MHz, QPSK/16-QAM) (0); Frequency: 841.5 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 841.5$ MHz; $\sigma = 0.985$ S/m; $\epsilon_r = 53.77$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- ε Probe: EX3DV4 - SN3736; ConvF(9.08, 9.08, 9.08); Calibrated: 2016-4-26;
- ε Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- ε Electronics: DAE4 Sn852; Calibrated: 2016-4-20
- ε Phantom: SAM2; Type: SAM; Serial: TP:1474
- ε DASY52 52.8.8(1258); SEMCAD X 14.6.10(7331)

Configuration/Body/Area Scan (4x13x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.246 W/kg

Configuration/Body/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm


Reference Value = 15.18 V/m; Power Drift = 0.00 dB

Peak SAR (extrapolated) = 0.319 W/kg

SAR(1 g) = 0.214 W/kg; SAR(10 g) = 0.145 W/kg

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.283 W/kg

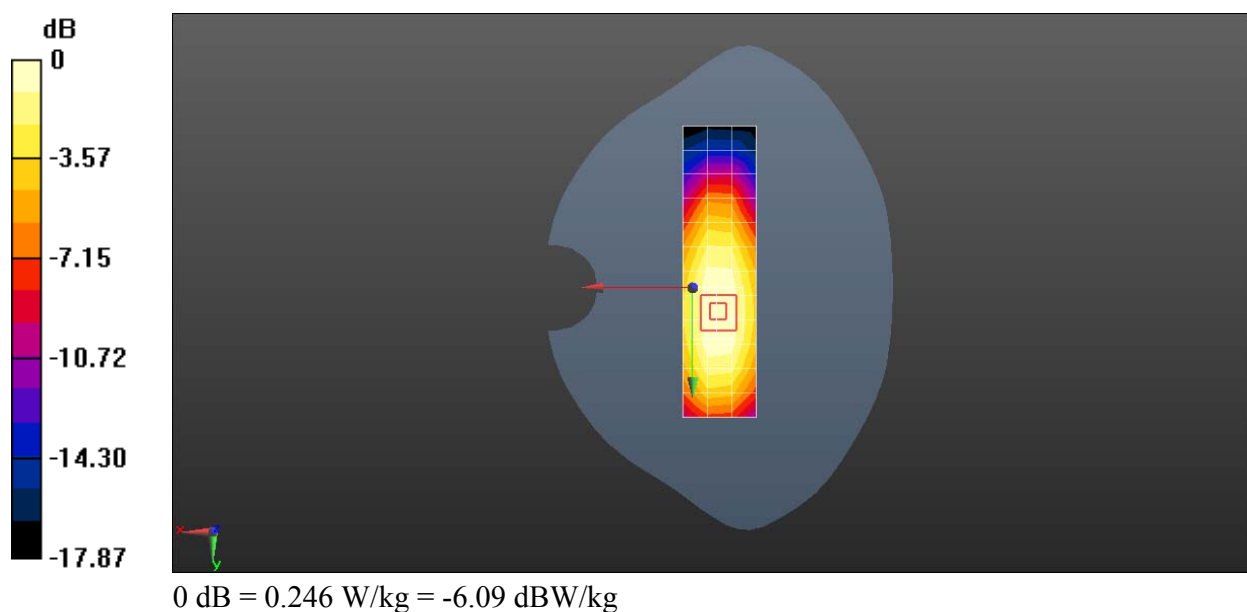

Test Laboratory: HUAWEI SAR/HAC Lab

LON LTE Band XLI 20M QPSK 1RB 50 offset 40340 Left touch with Battery 2-Main antenna

DUT: LON-L29; Type: Smart Phone; Serial: SAR3

Communication System: UID 0, LTE-TDD (SC-FDMA, 20MHz, QPSK/16-QAM) (0); Frequency: 2565 MHz; Duty Cycle: 1:1.58855

Medium parameters used: $f = 2565$ MHz; $\sigma = 1.891$ S/m; $\epsilon_r = 40.65$; $\rho = 1000$ kg/m³

Phantom section: Left Section

DASY Configuration:

- ε Probe: EX3DV4 - SN7346; ConvF(7.16, 7.16, 7.16); Calibrated: 2016-6-23;
- ε Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- ε Electronics: DAE4 Sn914; Calibrated: 2016/1/7
- ε Phantom: SAM5; Type: QD000P40CD; Serial: TP:1894
- ε DASY52 52.8.8(1222); SEMCAD X 14.6.10(7373)

Configuration/Head/Area Scan (10x16x1): Measurement grid: $dx=12$ mm, $dy=12$ mm

Maximum value of SAR (measured) = 0.0713 W/kg


Configuration/Head/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 1.343 V/m; Power Drift = 0.18 dB

Peak SAR (extrapolated) = 0.0920 W/kg

SAR(1 g) = 0.048 W/kg; SAR(10 g) = 0.026 W/kg

Maximum value of SAR (measured) = 0.0750 W/kg

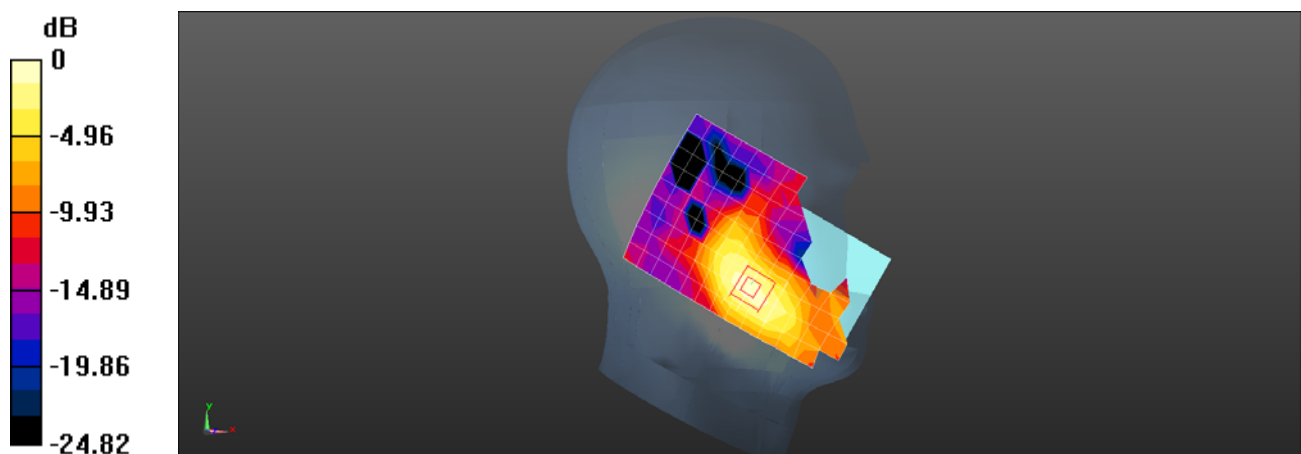

0 dB = 0.0750 W/kg = -11.25 dBW/kg

Test Laboratory: HUAWEI SAR/HAC Lab

LON LTE Band XLI 20M QPSK 1RB 50 offset 40340 Front side 15mm with battery2-Main antenna

DUT: LON-L29; Type: Smart Phone; Serial: SAR3

Communication System: UID 0, LTE-TDD (SC-FDMA, 20MHz, QPSK/16-QAM) (0); Frequency: 2565 MHz; Duty Cycle: 1:1.58855

Medium parameters used: $f = 2565$ MHz; $\sigma = 2.102$ S/m; $\epsilon_r = 54.899$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- ε Probe: EX3DV4 - SN7346; ConvF(7.28, 7.28, 7.28); Calibrated: 2016-6-23;
- ε Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- ε Electronics: DAE4 Sn914; Calibrated: 2016/1/7
- ε Phantom: SAM6; Type: QD 000 P40 CD; Serial: 1892
- ε DASY52 52.8.8(1222); SEMCAD X 14.6.10(7373)

Configuration/Body/Area Scan (10x16x1): Measurement grid: $dx=12$ mm, $dy=12$ mm

Maximum value of SAR (measured) = 0.104 W/kg


Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 2.697 V/m; Power Drift = -0.01 dB

Peak SAR (extrapolated) = 0.148 W/kg

SAR(1 g) = 0.079 W/kg; SAR(10 g) = 0.040 W/kg

Maximum value of SAR (measured) = 0.121 W/kg

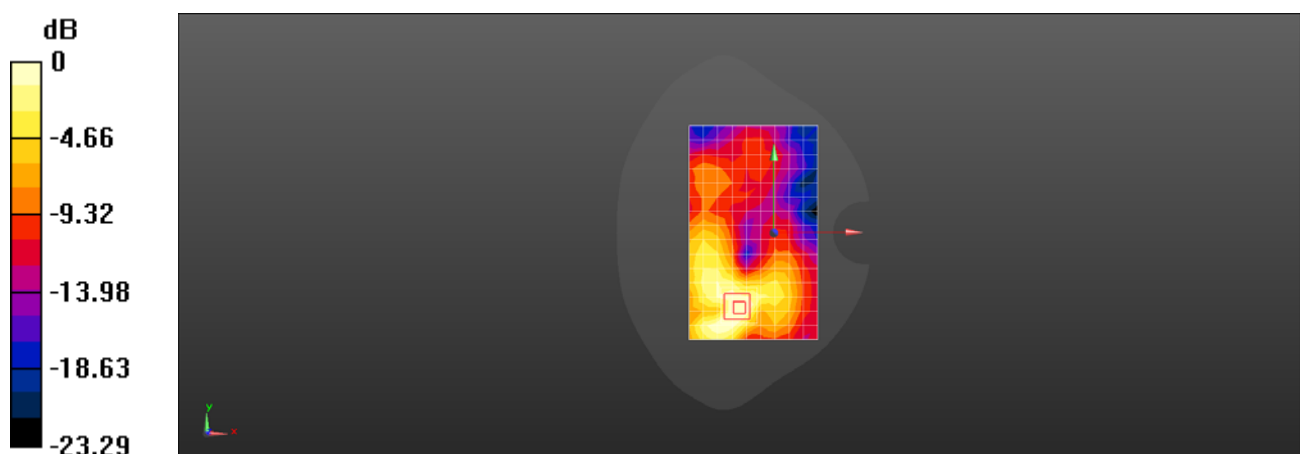

0 dB = 0.104 W/kg = -9.83 dBW/kg

Test Laboratory: HUAWEI SAR/HAC Lab

LON LTE Band XLI 20M QPSK 1RB 50 offset 40340 Front side 10mm with battery1 -Main antenna

DUT: LON-L29; Type: Smart Phone; Serial: SAR3

Communication System: UID 0, LTE-TDD (SC-FDMA, 20MHz, QPSK/16-QAM) (0); Frequency: 2565 MHz; Duty Cycle: 1:1.58855

Medium parameters used: $f = 2565$ MHz; $\sigma = 2.102$ S/m; $\epsilon_r = 54.899$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- ε Probe: EX3DV4 - SN7346; ConvF(7.28, 7.28, 7.28); Calibrated: 2016-6-23;
- ε Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- ε Electronics: DAE4 Sn914; Calibrated: 2016/1/7
- ε Phantom: SAM6; Type: QD 000 P40 CD; Serial: 1892
- ε DASY52 52.8.8(1222); SEMCAD X 14.6.10(7373)

Configuration/Body/Area Scan (10x16x1): Measurement grid: $dx=12$ mm, $dy=12$ mm

Maximum value of SAR (measured) = 0.314 W/kg


Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 1.037 V/m; Power Drift = 0.05 dB

Peak SAR (extrapolated) = 0.457 W/kg

SAR(1 g) = 0.235 W/kg; SAR(10 g) = 0.108 W/kg

Maximum value of SAR (measured) = 0.363 W/kg

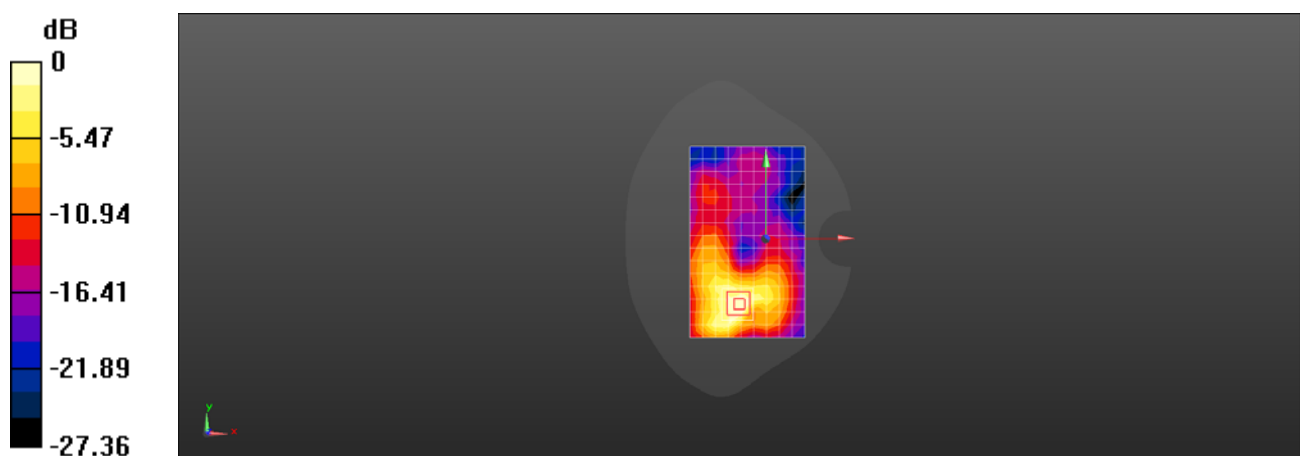

0 dB = 0.314 W/kg = -5.03 dBW/kg

Test Laboratory: HUAWEI SAR/HAC Lab

LON-L29 wifi2.4G 802.11g 6CH Left touch repeated

DUT: LON-L29; Type: Smart Phone; Serial: SAR1

Communication System: UID 0, WiFi(802.11a/b/g/n/ac) (0); Frequency: 2437 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 2437$ MHz; $\sigma = 1.793$ S/m; $\epsilon_r = 38.027$; $\rho = 1000$ kg/m³

Phantom section: Left Section

DASY Configuration:

- ε Probe: EX3DV4 - SN3744; ConvF(7.02, 7.02, 7.02); Calibrated: 2016-7-26;
- ε Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- ε Electronics: DAE4 Sn852; Calibrated: 2016-4-20
- ε Phantom: SAM1; Type: SAM; Serial: TP-1475
- ε DASY52 52.8.8(1258); SEMCAD X 14.6.10(7331)

Configuration/Head/Area Scan (10x16x1): Measurement grid: $dx=12$ mm, $dy=12$ mm
Maximum value of SAR (measured) = 1.62 W/kg


Configuration/Head/Zoom Scan (7x9x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 11.13 V/m; Power Drift = -0.07 dB

Peak SAR (extrapolated) = 2.35 W/kg

SAR(1 g) = 1.05 W/kg; SAR(10 g) = 0.485 W/kg

Maximum value of SAR (measured) = 1.75 W/kg

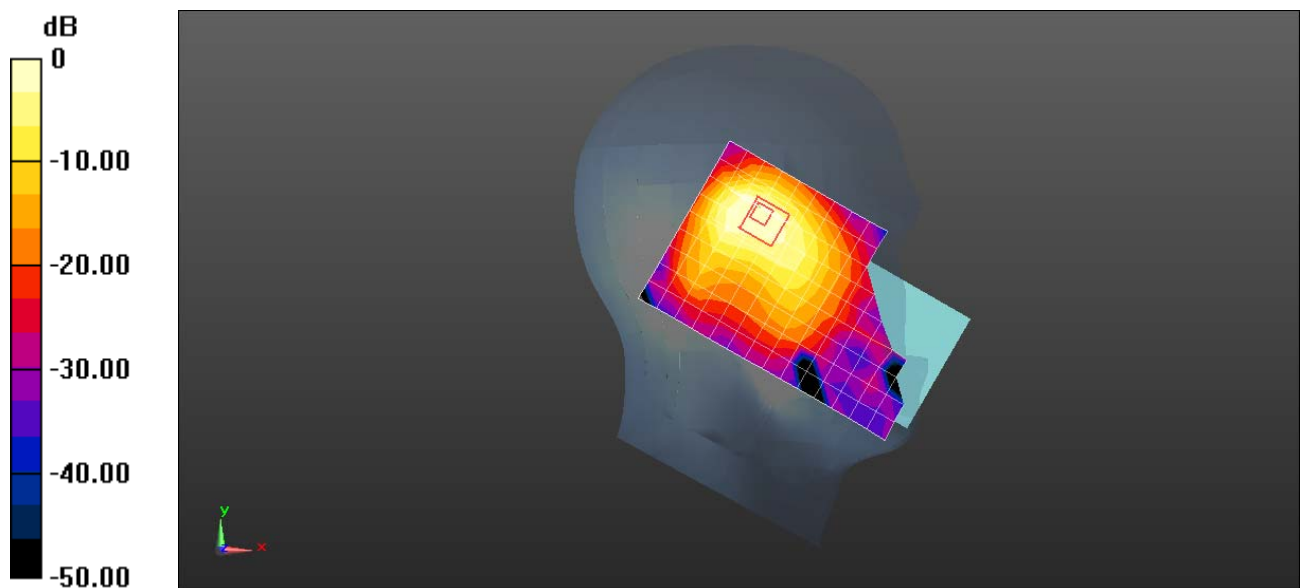

0 dB = 1.62 W/kg = 2.10 dBW/kg

Test Laboratory: HUAWEI SAR/HAC Lab

LON-L29 wifi2.4G 802.11b 11CH Back side 15mm

DUT: LON-L29; Type: Smart Phone; Serial: SAR1

Communication System: UID 0, WiFi(802.11a/b/g/n/ac) (0); Frequency: 2462 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 2462$ MHz; $\sigma = 1.966$ S/m; $\epsilon_r = 52.722$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- ε Probe: EX3DV4 - SN3736; ConvF(6.96, 6.96, 6.96); Calibrated: 2016-4-26;
- ε Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- ε Electronics: DAE4 Sn852; Calibrated: 2016-4-20
- ε Phantom: SAM2; Type: SAM; Serial: TP-1475
- ε DASY52 52.8.8(1258); SEMCAD X 14.6.10(7331)

Configuration/Body/Area Scan (10x16x1): Measurement grid: $dx=12$ mm, $dy=12$ mm
Maximum value of SAR (measured) = 0.128 W/kg


Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 4.756 V/m; Power Drift = -0.11 dB

Peak SAR (extrapolated) = 0.167 W/kg

SAR(1 g) = 0.091 W/kg; SAR(10 g) = 0.050 W/kg

Maximum value of SAR (measured) = 0.137 W/kg

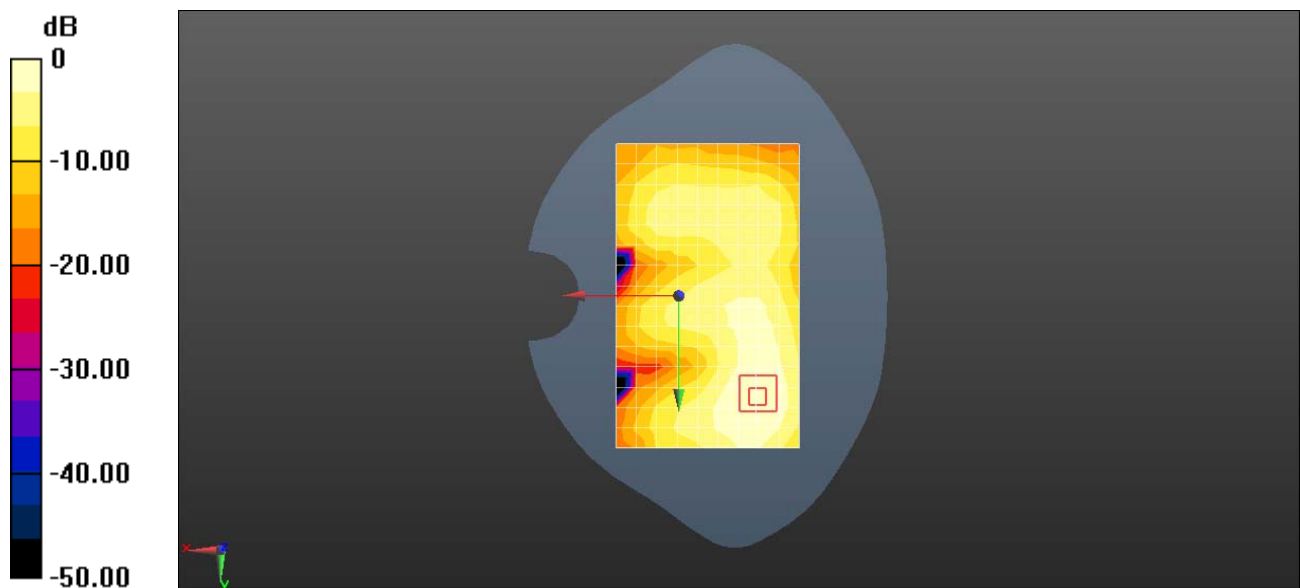

Test Laboratory: HUAWEI SAR/HAC Lab

LON-L29 wifi2.4G 802.11b 11CH Back side 10mm

DUT: LON-L29; Type: Smart Phone; Serial: SAR1

Communication System: UID 0, WiFi(802.11a/b/g/n/ac) (0); Frequency: 2462 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 2462$ MHz; $\sigma = 1.966$ S/m; $\epsilon_r = 52.722$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- ε Probe: EX3DV4 - SN3736; ConvF(6.96, 6.96, 6.96); Calibrated: 2016-4-26;
- ε Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- ε Electronics: DAE4 Sn852; Calibrated: 2016-4-20
- ε Phantom: SAM2; Type: SAM; Serial: TP-1475
- ε DASY52 52.8.8(1258); SEMCAD X 14.6.10(7331)

Configuration/Body/Area Scan (10x16x1): Measurement grid: $dx=12$ mm, $dy=12$ mm
Maximum value of SAR (measured) = 0.268 W/kg


Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 5.894 V/m; Power Drift = 0.03 dB

Peak SAR (extrapolated) = 0.369 W/kg

SAR(1 g) = 0.190 W/kg; SAR(10 g) = 0.100 W/kg

Maximum value of SAR (measured) = 0.297 W/kg

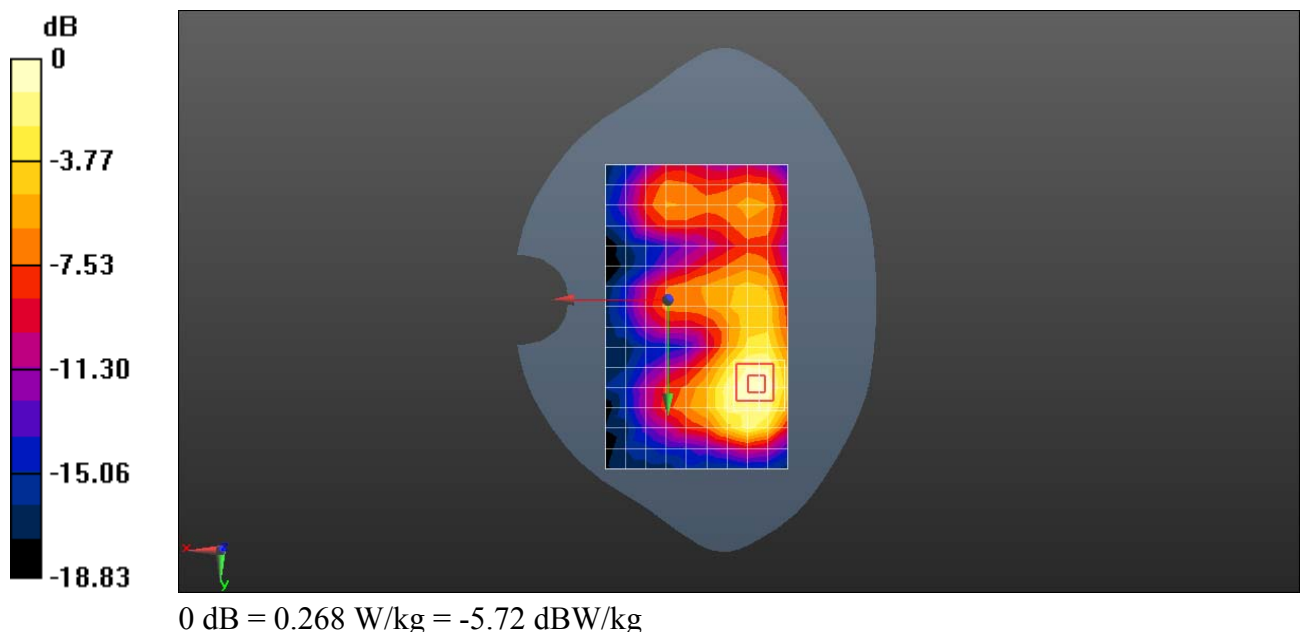

Test Laboratory: HUAWEI SAR/HAC Lab

LON-L29 WiFi 5G 802.11a 165CH Left touch

DUT: LON-L29; Type: Smart Phone; Serial: SAR3

Communication System: UID 0, WiFi(802.11a/b/g/n) (0); Frequency: 5825 MHz;Duty Cycle: 1:1

Medium parameters used: $f = 5825$ MHz; $\sigma = 5.248$ S/m; $\epsilon_r = 35.676$; $\rho = 1000$ kg/m³

Phantom section: Left Section

DASY Configuration:

- ε Probe: EX3DV4 - SN7346; ConvF(4.62, 4.62, 4.62); Calibrated: 2016-6-23;
- ε Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = 1.0, 29.0$
- ε Electronics: DAE4 Sn914; Calibrated: 2016/1/7
- ε Phantom: SAM5; Type: QD000P40CD; Serial: TP:1894
- ε DASY52 52.8.8(1222); SEMCAD X 14.6.10(7373)

Configuration/Head/Area Scan (12x18x1): Measurement grid: $dx=10$ mm, $dy=10$ mm

Maximum value of SAR (measured) = 2.08 W/kg


Configuration/Head/Zoom Scan (9x9x7)/Cube 0: Measurement grid: $dx=4$ mm, $dy=4$ mm, $dz=1.4$ mm

Reference Value = 2.995 V/m; Power Drift = 0.00 dB

Peak SAR (extrapolated) = 4.32 W/kg

SAR(1 g) = 1.11 W/kg; SAR(10 g) = 0.366 W/kg

Maximum value of SAR (measured) = 2.59 W/kg

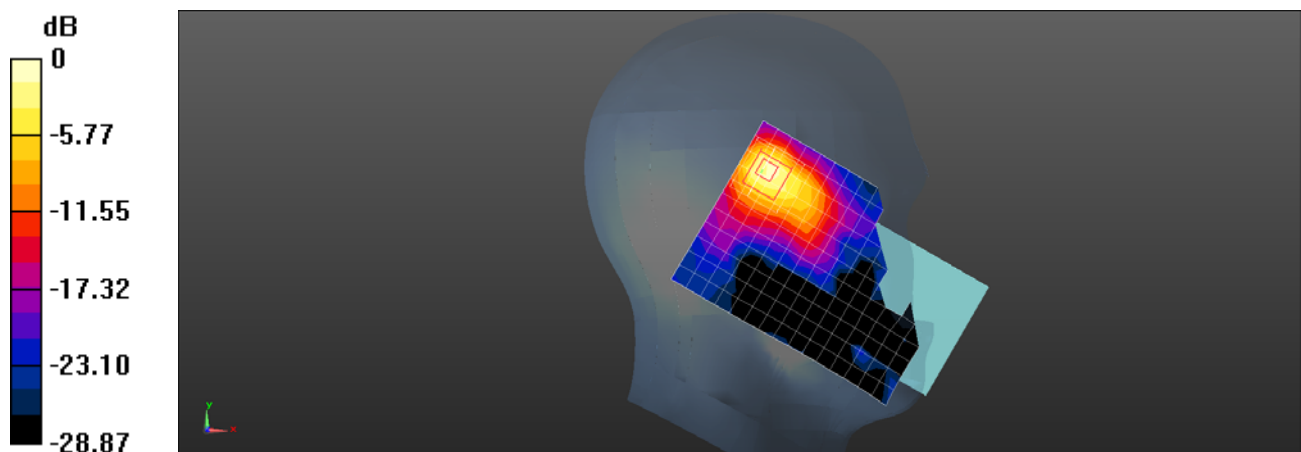

0 dB = 2.59 W/kg = 4.14 dBW/kg

Test Laboratory: HUAWEI SAR/HAC Lab

LON-L29 WiFi 5G 802.11a 20M 128CH Right touch**DUT: LON-L29; Type: Smart Phone; Serial: SAR3**

Communication System: UID 0, WiFi(802.11a/b/g/n) (0); Frequency: 5640 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 5640$ MHz; $\sigma = 5.087$ S/m; $\epsilon_r = 34.163$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY Configuration:

- ι Probe: EX3DV4 - SN7346; ConvF(4.36, 4.36, 4.36); Calibrated: 2016-6-23;
- ι Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = 1.0, 29.0$
- ι Electronics: DAE4 Sn914; Calibrated: 2016-1-7
- ι Phantom: SAM5; Type: QD000P40CD; Serial: TP:1894
- ι DASY52 52.8.8(1258); SEMCAD X 14.6.10(7331)

Configuration/Head/Area Scan (12x18x1): Measurement grid: $dx=10$ mm, $dy=10$ mm

Maximum value of SAR (measured) = 0.363 W/kg


Configuration/Head/Zoom Scan (8x8x7)/Cube 0: Measurement grid: $dx=4$ mm, $dy=4$ mm, $dz=1.4$ mm

Reference Value = 1.685 V/m; Power Drift = 0.18 dB

Peak SAR (extrapolated) = 0.689 W/kg

SAR(1 g) = 0.200 W/kg; SAR(10 g) = 0.063 W/kg

Maximum value of SAR (measured) = 0.445 W/kg

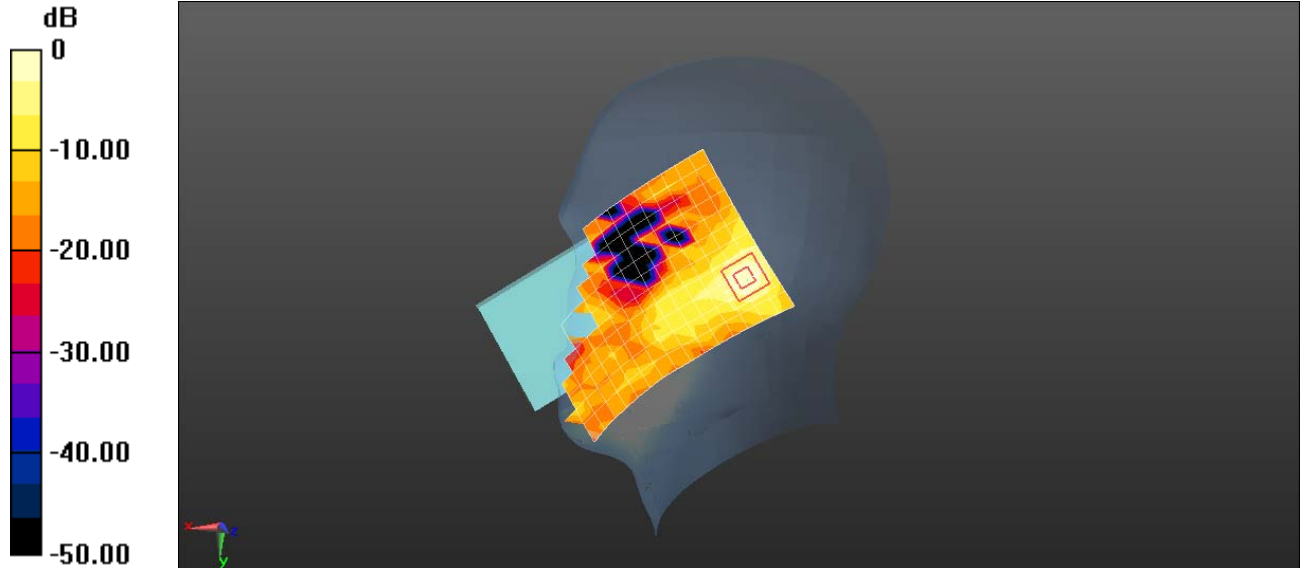

0 dB = 0.363 W/kg = -4.40 dBW/kg

Test Laboratory: HUAWEI SAR/HAC Lab

LON-L29 WiFi 5G 802.11a 132CH Front side 15mm

DUT: LON-L29; Type: Smart Phone; Serial: SAR3

Communication System: UID 0, WiFi(802.11a/b/g/n) (0); Frequency: 5660 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 5660$ MHz; $\sigma = 5.993$ S/m; $\epsilon_r = 48.209$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- ε Probe: EX3DV4 - SN7346; ConvF(3.8, 3.8, 3.8); Calibrated: 2016-6-23;
- ε Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = 1.0, 29.0$
- ε Electronics: DAE4 Sn914; Calibrated: 2016/1/7
- ε Phantom: SAM6; Type: QD 000 P40 CD; Serial: 1892
- ε DASY52 52.8.8(1222); SEMCAD X 14.6.10(7373)

Configuration/Body/Area Scan (12x19x1): Measurement grid: $dx=10$ mm, $dy=10$ mm

Maximum value of SAR (measured) = 0.194 W/kg


Configuration/Body/Zoom Scan (8x9x7)/Cube 0: Measurement grid: $dx=4$ mm, $dy=4$ mm, $dz=1.4$ mm

Reference Value = 1.645 V/m; Power Drift = 0.13 dB

Peak SAR (extrapolated) = 0.286 W/kg

SAR(1 g) = 0.099 W/kg; SAR(10 g) = 0.043 W/kg

Maximum value of SAR (measured) = 0.199 W/kg

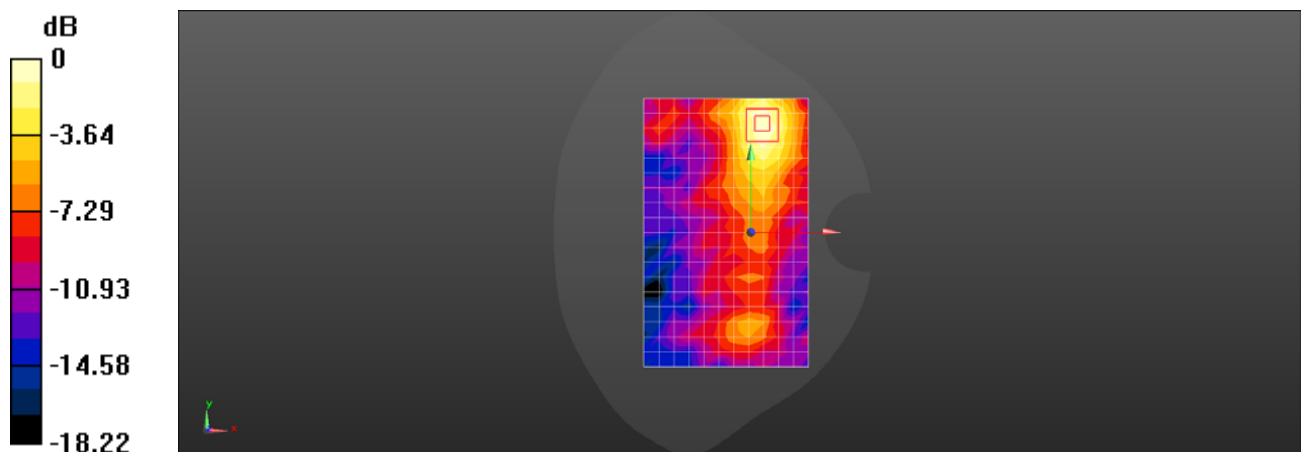

0 dB = 0.194 W/kg = -7.11 dBW/kg

Test Laboratory: HUAWEI SAR/HAC Lab

LON-L29 WiFi 5G 802.11a 161CH Right side 10mm with battery2

DUT: LON-L29; Type: Smart Phone; Serial: SAR3

Communication System: UID 0, WiFi(802.11a/b/g/n) (0); Frequency: 5805 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 5805$ MHz; $\sigma = 6.206$ S/m; $\epsilon_r = 47.928$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- ε Probe: EX3DV4 - SN7346; ConvF(4.01, 4.01, 4.01); Calibrated: 2016-6-23;
- ε Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = 1.0, 29.0$
- ε Electronics: DAE4 Sn914; Calibrated: 2016/1/7
- ε Phantom: SAM6; Type: QD 000 P40 CD; Serial: 1892
- ε DASY52 52.8.8(1222); SEMCAD X 14.6.10(7373)

Configuration/Body/Area Scan (7x19x1): Measurement grid: $dx=10$ mm, $dy=10$ mm

Maximum value of SAR (measured) = 0.605 W/kg


Configuration/Body/Zoom Scan (8x8x7)/Cube 0: Measurement grid: $dx=4$ mm, $dy=4$ mm, $dz=1.4$ mm

Reference Value = 3.048 V/m; Power Drift = 0.14 dB

Peak SAR (extrapolated) = 0.973 W/kg

SAR(1 g) = 0.271 W/kg; SAR(10 g) = 0.113 W/kg

Maximum value of SAR (measured) = 0.595 W/kg

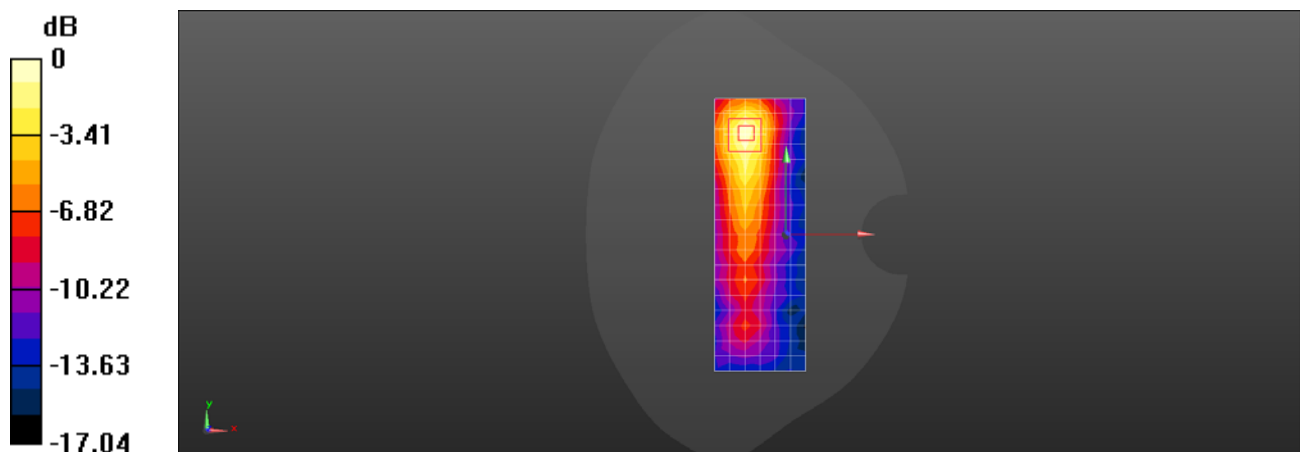

0 dB = 0.595 W/kg = -2.25 dBW/kg

Test Laboratory: HUAWEI SAR/HAC Lab

LON-L29 WiFi 5G 802.11a 132CH Front side 0mm

DUT: LON-L29; Type: Smart Phone; Serial: SAR3

Communication System: UID 0, WiFi(802.11a/b/g/n) (0); Frequency: 5660 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 5660$ MHz; $\sigma = 5.993$ S/m; $\epsilon_r = 48.209$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- ε Probe: EX3DV4 - SN7346; ConvF(3.8, 3.8, 3.8); Calibrated: 2016-6-23;
- ε Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = 1.0, 29.0$
- ε Electronics: DAE4 Sn914; Calibrated: 2016/1/7
- ε Phantom: SAM6; Type: QD 000 P40 CD; Serial: 1892
- ε DASY52 52.8.8(1222); SEMCAD X 14.6.10(7373)

Configuration/Body/Area Scan (12x19x1): Measurement grid: $dx=10$ mm, $dy=10$ mm

Maximum value of SAR (measured) = 3.93 W/kg


Configuration/Body/Zoom Scan (8x9x7)/Cube 0: Measurement grid: $dx=4$ mm, $dy=4$ mm, $dz=1.4$ mm

Reference Value = 1.410 V/m; Power Drift = 0.14 dB

Peak SAR (extrapolated) = 12.3 W/kg

SAR(1 g) = 2.58 W/kg; SAR(10 g) = 0.725 W/kg

Maximum value of SAR (measured) = 6.57 W/kg

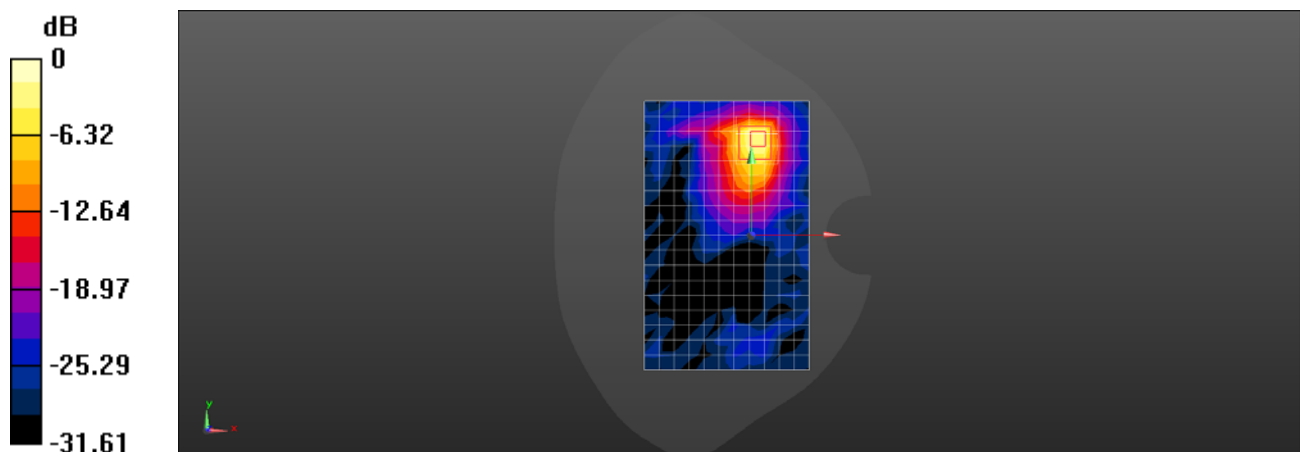

0 dB = 6.57 W/kg = 8.17 dBW/kg