

# FCC Test Report


## FCC ID: QISM2-802L

This report concerns (check one): ☐ Original Grant ☒ Class II Change

**Project No.** : 1504C091E  
**Equipment** : HUAWEI MediaPad M2 8.0  
**Model Name** : M2-802L  
**Applicant** : Huawei Technologies Co.,Ltd.  
**Address** : Administration Building, Headquarters of Huawei Technologies Co., Ltd., Bantian, Longgang District Shenzhen China


**Date of Receipt** : Apr. 13, 2015  
Jun. 19, 2015  
**Date of Test** : Apr. 13, 2015 ~ Apr. 30, 2015  
Jun. 19, 2015 ~ Jun. 29, 2015  
**Issued Date** : Feb. 04, 2016  
**Tested by** : BTL Inc.

**Testing Engineer** :




(Pike Lee)

**Technical Manager** :



(Jeff Yang)

**Authorized Signatory** :



(Andy Chiu)

# **B T L I N C .**

B1, No. 37, Lane 365, Yang-Guang St.,  
Nei-Hu District, Taipei City 114, Taiwan.

TEL: +886-2-2657-3299 FAX: +886-2-2657-3331



### **Declaration**

**BTL** represents to the client that testing is done in accordance with standard procedures as applicable and that test instruments used has been calibrated with standards traceable to international standard(s) and/or national standard(s).

**BTL's** reports apply only to the specific samples tested under conditions. It is manufacture's responsibility to ensure that additional production units of this model are manufactured with the identical electrical and mechanical components. **BTL** shall have no liability for any declarations, inferences or generalizations drawn by the client or others from **BTL** issued reports.

**BTL's** report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the Federal Government.

This report is the confidential property of the client. As a mutual protection to the clients, the public and **BTL-self**, extracts from the test report shall not be reproduced except in full with **BTL's** authorized written approval.

**BTL's** laboratory quality assurance procedures are in compliance with the **ISO Guide 17025** requirements, and accredited by the conformity assessment authorities listed in this test report.

### **Limitation**

For the use of the authority's logo is limited unless the Test Standard(s)/Scope(s)/Item(s) mentioned in this test report is (are) included in the conformity assessment authorities acceptance respective.

| <b>Table of Contents</b>                                     | <b>Page</b> |
|--------------------------------------------------------------|-------------|
| <b>1 . CERTIFICATION</b>                                     | <b>5</b>    |
| <b>2 . SUMMARY OF TEST RESULTS</b>                           | <b>6</b>    |
| 2.1 TEST FACILITY                                            | 7           |
| 2.2 MEASUREMENT UNCERTAINTY                                  | 7           |
| <b>3 . GENERAL INFORMATION</b>                               | <b>8</b>    |
| 3.1 GENERAL DESCRIPTION OF EUT                               | 8           |
| 3.2 DESCRIPTION OF TEST MODES                                | 9           |
| 3.3 BLOCK DIAGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED | 10          |
| 3.4 DESCRIPTION OF SUPPORT UNITS                             | 12          |
| <b>4 . EMC EMISSION TEST</b>                                 | <b>13</b>   |
| 4.1 CONDUCTED EMISSION MEASUREMENT                           | 13          |
| 4.1.1 POWER LINE CONDUCTED EMISSION                          | 13          |
| 4.1.2 MEASUREMENT INSTRUMENTS LIST                           | 13          |
| 4.1.3 TEST PROCEDURE                                         | 14          |
| 4.1.4 DEVIATION FROM TEST STANDARD                           | 14          |
| 4.1.5 TEST SETUP                                             | 14          |
| 4.1.6 EUT OPERATING CONDITIONS                               | 14          |
| 4.1.7 TEST RESULTS                                           | 15          |
| 4.2 RADIATED EMISSION MEASUREMENT                            | 34          |
| 4.2.1 LIMITS OF RADIATED EMISSION MEASUREMENT                | 34          |
| 4.2.2 MEASUREMENT INSTRUMENTS LIST                           | 35          |
| 4.2.3 TEST PROCEDURE                                         | 35          |
| 4.2.4 DEVIATIONFROMTESTSTANDARD                              | 35          |
| 4.2.5 TESTSETUP                                              | 36          |
| 4.2.6 EUT OPERATING CONDITIONS                               | 36          |
| 4.2.7 TEST RESULTS-BETWEEN 30MHZ AND 1000MHZ                 | 37          |
| 4.2.8 TEST RESULTS- ABOVE 1000MHZ                            | 58          |
| <b>6. EUT TEST PHOTO</b>                                     | <b>83</b>   |

### REPORT ISSUED HISTORY

| Issued No.           | Description                                                                                                                                                                                                                                                                                       | Issued Date   |
|----------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------|
| BTL-FCCE-1-1504C091  | Original Report.                                                                                                                                                                                                                                                                                  | May. 04, 2015 |
| BTL-FCCE-1-1504C091B | Compared with the previous report (BTL-FCCE-1-1504C091), four adapters are added.<br>In this test report records the new test results and the original models' test results are still remained.                                                                                                   | Jun. 30, 2015 |
| BTL-FCCE-1-1504C091E | Compared with previous report (BTL-FCCE-1-1504C091B) the difference as follow:<br>1. WIFI 5G part has been closed via software,<br>2. The main antenna size is changed, and the antenna gain is different.<br>the test results of the WIFI 5G port have been deleted, the rest are kept the same. | Feb. 04, 2016 |

## 1. CERTIFICATION

Equipment : HUAWEI MediaPad M2 8.0  
Brand Name : HUAWEI  
Model Name : M2-802L  
Applicant : Huawei Technologies Co.,Ltd.  
Manufacturer : Huawei Technologies Co.,Ltd.  
Address : Administration Building, Headquarters of Huawei Technologies Co., Ltd.,  
Bantian, Longgang District Shenzhen China  
Factory : BYD Huizhou Electronics Co.,Ltd.  
Address : Xiangshui River Daya Bay Economic Development Zone Huizhou Guangdong  
P.R China  
Date of Test : Apr. 13, 2015 ~ Apr. 30, 2015  
Jun. 19, 2015 ~ Jun. 29, 2015  
Test Sample : Engineering Sample  
Standard(s) : FCC Part 15, Subpart B  
ANSI C63.4-2009

The above equipment has been tested and found compliance with the requirement of the relative standards by BTL Inc.

The test data, data evaluation, and equipment configuration contained in our test report (Ref No. BTL-FCCE-1-1504C091E) were obtained utilizing the test procedures, test instruments, test sites that has been accredited by the Authority of TAF according to the ISO-17025 quality assessment standard and technical standard(s).

## 2. SUMMARY OF TEST RESULTS

Test procedures according to the technical standard(s):

| EMC Emission                             |                               |         |          |                 |
|------------------------------------------|-------------------------------|---------|----------|-----------------|
| Standard(s)                              | Test Item                     | Limit   | Judgment | Remark          |
| FCC Part15, Subpart B<br>ANSI C63.4-2009 | Conducted Emission            | Class B | PASS     |                 |
|                                          | Radiated emission Below 1 GHz | Class B | PASS     |                 |
|                                          | Radiated emission Above 1 GHz | Class B | PASS     | <b>NOTE (2)</b> |

### NOTE:

- (1) " N/A" denotes test is not applicable in this test report.
- (2) The EUT's max operating frequency is 2480 MHz which exceeds 108 MHz, so the test will be performed.

## 2.1 TEST FACILITY

The test facilities used to collect the test data in this report is at the location of 1F., No. 61, Ln. 77, Sing-ai Rd., Neihu Dist., Taipei City 114, Taiwan (R.O.C.).

## 2.2 MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2 .The BTL measurement uncertainty is less than the CISPR 16-4-2  $U_{\text{CISPR}}$  requirement.

The reported uncertainty of measurement  $y \pm U$ , where expanded uncertainty  $U$  is based on a standard uncertainty multiplied by a coverage factor of  $k=2$ , providing a level of confidence of approximately 95% .

### A. Conducted Measurement :

| Test Site | Method | Measurement Frequency Range | U, (dB) |
|-----------|--------|-----------------------------|---------|
| C02       | CISPR  | 150 KHz~30MHz               | 2.59    |

### B. Radiated Measurement :

| Test Site | Method | Measurement Frequency Range | Ant. H / V | U, (dB) |
|-----------|--------|-----------------------------|------------|---------|
| CB08      | CISPR  | 30MHz~200MHz                | V          | 3.22    |
|           |        | 30MHz~200MHz                | H          | 3.55    |
|           |        | 200MHz~ 1,000MHz            | V          | 3.24    |
|           |        | 200MHz~ 1,000MHz            | H          | 3.11    |
|           |        | 1,000MHz~18,000MHz          | V          | 4.05    |
|           |        | 1,000MHz~18,000MHz          | H          | 3.97    |
|           |        | 18,000MHz~40,000MHz         | V          | 4.04    |
|           |        | 18,000MHz~40,000MHz         | H          | 4.01    |

Note: Unless specifically mentioned, the uncertainty of measurement has not been taken into account to declare the compliance or non-compliance to the specification.

### 3. GENERAL INFORMATION

#### 3.1 GENERAL DESCRIPTION OF EUT

|                  |                                                                                                                                                                                                                                                                                                          |
|------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Equipment        | HUAWEI MediaPad M2 8.0                                                                                                                                                                                                                                                                                   |
| Brand Name       | HUAWEI                                                                                                                                                                                                                                                                                                   |
| Model Name       | M2-802L                                                                                                                                                                                                                                                                                                  |
| Model Difference | N/A                                                                                                                                                                                                                                                                                                      |
| PowerSource      | #1 DC voltage supplied from AC adapter.<br>Brand: HUAWEI Model: HW-050200U3W, HW-050200U01<br>S/N: HWHKA5E32707819 S/N: HWBYA32DC1600019<br>S/N: Y67401F3G00038 S/N: P67401F5W00017<br>S/N: B67432F1E00013 S/N: H67416F6100005<br>#2 Supplied from Li-ion Battery.<br>Brand /Model: HUAWEI / HB3080G1EBW |
| Power Rating     | #1 I/P: 100-240V~ 50/60Hz 0.5A O/P: DC 5.0V 2.0A<br>#2 DC +3.7V 3000mAh                                                                                                                                                                                                                                  |

Note:

1. For a more detailed features description, please refer to the manufacturer's specifications or the user's manual.

### 3.2 DESCRIPTION OF TEST MODES

To investigate the maximum EMI emission characteristics generated from EUT, the test system was pre-scanning tested base on the consideration of following EUT operation mode or test configuration mode which possible have effect on EMI emission level. Each of these EUT operation mode(s) or test configuration mode(s) mentioned above was evaluated respectively.

| Pretest Mode | Description                                           |
|--------------|-------------------------------------------------------|
| Mode 1       | Idle + 2.4G wifi + BT + GPS + earphone + Playing      |
| Mode 2       | Traffic + 2.4G wifi + BT + GPS + earphone + camera on |
| Mode 3       | Idle + 2.4G wifi + BT + GPS + Speaker + Playing       |
| Mode 4       | Traffic + 2.4G wifi + BT + GPS + Speaker + camera on  |
| Mode 5       | USB R/W + Idle + 2.4G wifi + BT + GPS + earphone      |

The EUT system operated these modes were found to be the worst case during the pre-scanning test as following:


| For Conducted Test |                                                       |
|--------------------|-------------------------------------------------------|
| Final Test Mode    | Description                                           |
| Mode 1             | Idle + 2.4G wifi + BT + GPS + earphone + Playing      |
| Mode 2             | Traffic + 2.4G wifi + BT + GPS + earphone + camera on |
| Mode 3             | Idle + 2.4G wifi + BT + GPS + Speaker + Playing       |
| Mode 5             | USB R/W + Idle + 2.4G wifi + BT + GPS + earphone      |

| For Radiated Test (30MHz to 1000MHz) |                                                       |
|--------------------------------------|-------------------------------------------------------|
| Final Test Mode                      | Description                                           |
| Mode 1                               | Idle + 2.4G wifi + BT + GPS + earphone + Playing      |
| Mode 2                               | Traffic + 2.4G wifi + BT + GPS + earphone + camera on |
| Mode 3                               | Idle + 2.4G wifi + BT + GPS + Speaker + Playing       |
| Mode 5                               | USB R/W + Idle + 2.4G wifi + BT + GPS + earphone      |

| For Radiated Test (Above 1000MHz) |                                                       |
|-----------------------------------|-------------------------------------------------------|
| Final Test Mode                   | Description                                           |
| Mode 1                            | Idle + 2.4G wifi + BT + GPS + earphone + Playing      |
| Mode 2                            | Traffic + 2.4G wifi + BT + GPS + earphone + camera on |
| Mode 3                            | Idle + 2.4G wifi + BT + GPS + Speaker + Playing       |
| Mode 4                            | Traffic + 2.4G wifi + BT + GPS + Speaker + camera on  |
| Mode 5                            | USB R/W + Idle + 2.4G wifi + BT + GPS + earphone      |


### 3.3 BLOCK DIAGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED

Mode 1~4

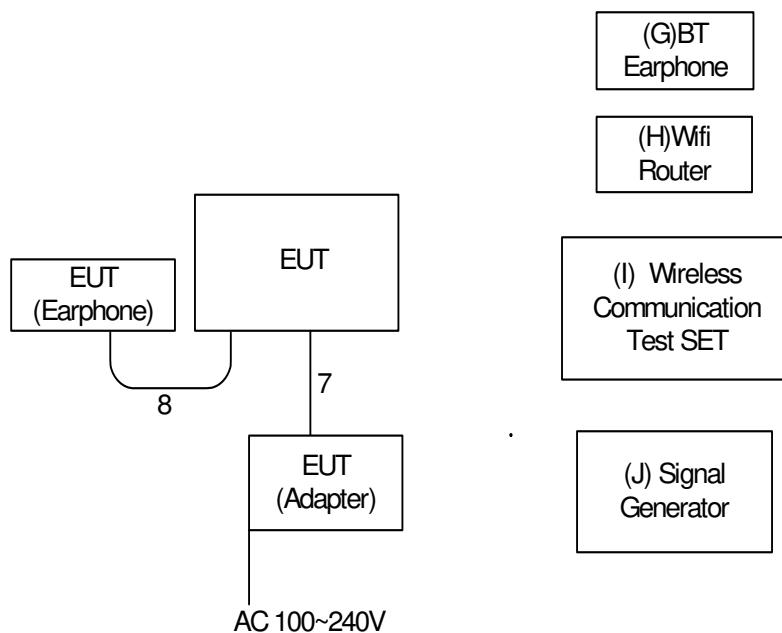

----- Ground plane  
Remote System

# Mode 5

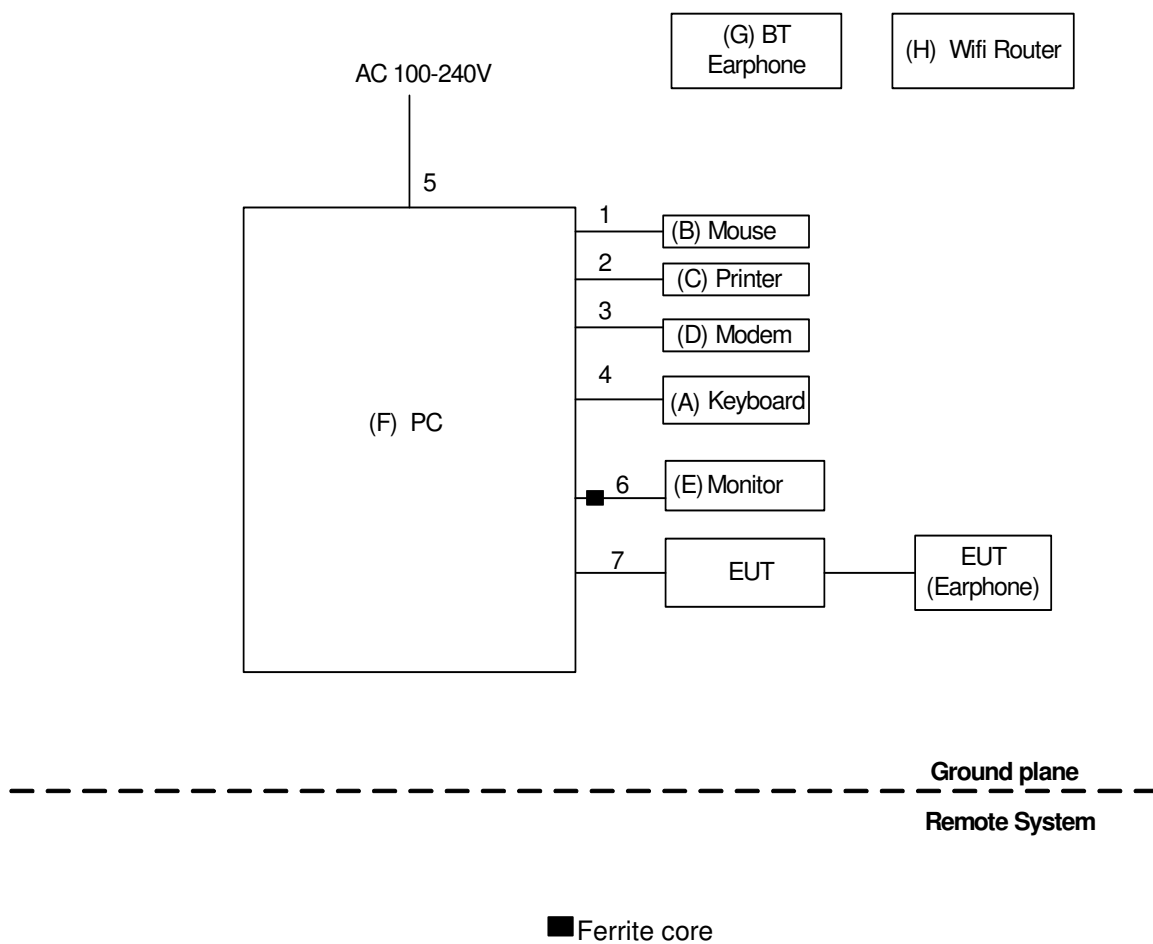

### 3.4 DESCRIPTION OF SUPPORT UNITS

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

| Item | Equipment                       | Mfr/Brand | Model/Type No.       | FCC ID     | Series No.              |
|------|---------------------------------|-----------|----------------------|------------|-------------------------|
| A    | USB keyboard                    | hp        | SK-2885              | DOC        | N/A                     |
| B    | USB Mouse                       | hp        | SM-2020              | DOC        | N/A                     |
| C    | Printer                         | SII       | DPU-414              | DOC        | 3018507 B               |
| D    | Modem                           | ACEEX     | DM-1414V             | IFAXDM1414 | 0603002131              |
| E    | LCD monitor                     | DELL      | E177FPc              | DOC        | CNOFJ179-64180-6AG-1WNS |
| F    | PC                              | DELL      | 7010 MT              | DOC        | 7LRQ2W1                 |
| G    | BT Earphone                     | N/A       | N/A                  | N/A        | N/A                     |
| H    | Router                          | TP-LINK   | TL-WR1041N           | DOC        | N/A                     |
| I    | Wireless Communication Test SET | Agilent   | (8960 Series) E5515C | N/A        | MY48364183              |
| J    | SignalGenerator                 | Agilent   | E4438C               | N/A        | MY49071316              |

| Item | Shielded Type | Ferrite Core | Length | Note           |
|------|---------------|--------------|--------|----------------|
| 1    | YES           | NO           | 1.8m   | USB Cable      |
| 2    | YES           | NO           | 1.8m   | Parallel Cable |
| 3    | YES           | NO           | 1.8m   | RS232 Cable    |
| 4    | YES           | NO           | 1.8m   | USB Cable      |
| 5    | NO            | NO           | 1.8m   | AC Cable       |
| 6    | YES           | YES          | 1.8m   | D-SUB Cable    |
| 7    | YES           | NO           | 1m     | USB Cable      |
| 8    | NO            | NO           | 1.1m   | Audio Cable    |

Note:

- (1) For detachable type I/O cable should be specified the length in m in 『Length』 column.

## 4. EMC EMISSION TEST

### 4.1 CONDUCTED EMISSION MEASUREMENT

#### 4.1.1 POWER LINE CONDUCTED EMISSION (FREQUENCY RANGE 150KHZ-30MHZ)

| FREQUENCY (MHz) | Class A (dBuV) |         | Class B (dBuV) |           |
|-----------------|----------------|---------|----------------|-----------|
|                 | Quasi-peak     | Average | Quasi-peak     | Average   |
| 0.15 -0.5       | 79.00          | 66.00   | 66 - 56 *      | 56 - 46 * |
| 0.50 -5.0       | 73.00          | 60.00   | 56.00          | 46.00     |
| 5.0 -30.0       | 73.00          | 60.00   | 60.00          | 50.00     |

Note:

- (1) The tighter limit applies at the band edges.
- (2) The limit of " \* " marked band means the limitation decreases linearly with the logarithm of the frequency in the range.
- (3) The test result calculated as following:  
 Measurement Value = Reading Level + Correct Factor  
 Correct Factor = Insertion Loss + Cable Loss + Attenuator Factor(if use)  
 Margin Level = Measurement Value - Limit Value

#### 4.1.2 MEASUREMENT INSTRUMENTS LIST

| Item | Kind of Equipment    | Manufacturer | Type No.                   | Serial No. | Calibrated until |
|------|----------------------|--------------|----------------------------|------------|------------------|
| 1    | TWO-LINE V-NETWORK   | R&S          | ENV216                     | 100087     | Dec. 07, 2015    |
| 2    | Test Cable           | TIMES        | CFD300-NL                  | C02        | Jun. 15, 2015    |
| 3    | EMI Test Receiver    | Agilent      | N9038A                     | MY51210215 | Apr. 21, 2016    |
| 4    | Measurement Software | EZ           | EZ EMC<br>(Version NB-03A) | N/A        | N/A              |

Remark: " N/A " denotes no model name, serial No. or no calibration specified.


#### 4.1.3 TEST PROCEDURE

- The EUT was placed 0.8 meters from the horizontal ground plane with EUT being connected to the power mains through a line impedance stabilization network (LISN). All other support equipments powered from additional LISN(s). The LISN provide 50 Ohm/ 50uH of coupling impedance for the measuring instrument.
- Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.
- I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
- LISN at least 80 cm from nearest part of EUT chassis.
- For the actual test configuration, please refer to the related Item –EUT Test Photos.

#### 4.1.4 DEVIATION FROM TEST STANDARD

No deviation

#### 4.1.5 TEST SETUP

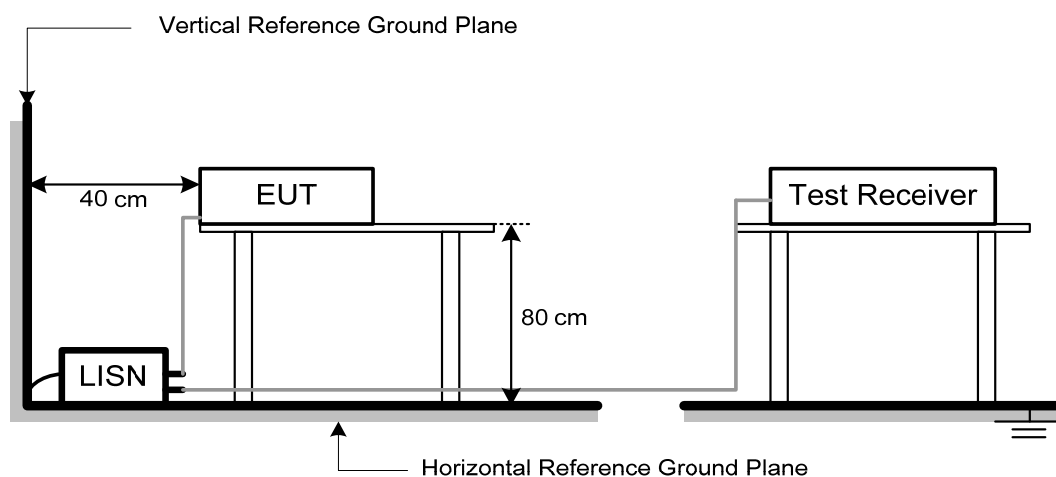

#### 4.1.6 EUT OPERATING CONDITIONS


The EUT exercise program used during radiated and/or conducted emission measurement was designed to exercise the various system components in a manner similar to a typical use.

#### 4.1.7 TEST RESULTS

Remark:


- (1) Reading in which marked as QP means measurements by using are Quasi-Peak Mode with Detector BW=9KHz; SPA setting in RBW=10KHz, VBW =10KHz, Swp. Time = 0.3 sec./MHz. Reading in which marked as AV means measurements by using are Average Mode with instrument setting in RBW=10KHz, VBW=10KHz, Swp. Time =0.3 sec./MHz.
- (2) All readings are QP Mode value unless otherwise stated AVG in column of『Note』. If the QP Mode Measured value compliance with the QP Limits and lower than AVG Limits, the EUT shall be deemed to meet both QP & AVG Limits and then only QP Mode was measured, but AVG Mode didn't perform. In this case, a “ \* ” marked in AVG Mode column of Interference Voltage Measured.
- (3) Measuring frequency range from 150KHz to 30MHz.

|               |                                                                                 |                     |              |
|---------------|---------------------------------------------------------------------------------|---------------------|--------------|
| E.U.T :       | HUAWEI MediaPad M2 8.0                                                          | Model Name :        | M2-802L      |
| Temperature : | 22° C                                                                           | Relative Humidity : | 55 %         |
| Pressure :    | 1012 hPa                                                                        | Test Voltage :      | AC 120V/60Hz |
| Test Mode :   | Idle + 2.4G wifi + BT+ GPS+ earphone + Playing – Adapter: BYD(HWBYA32DC1600019) | Phase:              | Line         |

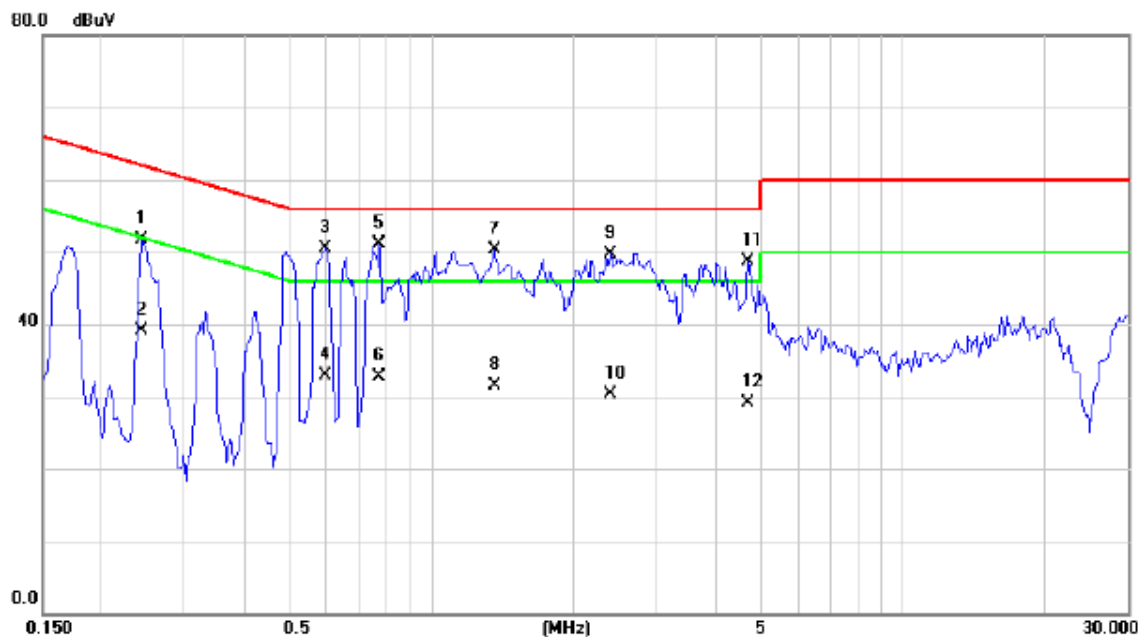


| No. | Mk. | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dB | Measure-<br>ment<br>dBuV | Limit<br>dBuV | Margin<br>dB | Detector | Comment |
|-----|-----|--------------|--------------------------|-------------------------|--------------------------|---------------|--------------|----------|---------|
| 1   |     | 0.2437       | 41.97                    | 9.67                    | 51.64                    | 61.97         | -10.33       | QP       |         |
| 2   |     | 0.2437       | 29.50                    | 9.67                    | 39.17                    | 51.97         | -12.80       | AVG      |         |
| 3   |     | 0.5992       | 40.80                    | 9.77                    | 50.57                    | 56.00         | -5.43        | QP       |         |
| 4   |     | 0.5992       | 23.10                    | 9.77                    | 32.87                    | 46.00         | -13.13       | AVG      |         |
| 5   | *   | 0.7790       | 41.20                    | 9.81                    | 51.01                    | 56.00         | -4.99        | QP       |         |
| 6   |     | 0.7790       | 22.90                    | 9.81                    | 32.71                    | 46.00         | -13.29       | AVG      |         |
| 7   |     | 1.3610       | 40.45                    | 9.80                    | 50.25                    | 56.00         | -5.75        | QP       |         |
| 8   |     | 1.3610       | 21.70                    | 9.80                    | 31.50                    | 46.00         | -14.50       | AVG      |         |
| 9   |     | 2.4000       | 40.06                    | 9.73                    | 49.79                    | 56.00         | -6.21        | QP       |         |
| 10  |     | 2.4000       | 20.50                    | 9.73                    | 30.23                    | 46.00         | -15.77       | AVG      |         |
| 11  |     | 4.7148       | 39.78                    | 8.87                    | 48.65                    | 56.00         | -7.35        | QP       |         |
| 12  |     | 4.7148       | 20.30                    | 8.87                    | 29.17                    | 46.00         | -16.83       | AVG      |         |

|               |                                                                                   |                     |              |
|---------------|-----------------------------------------------------------------------------------|---------------------|--------------|
| E.U.T :       | HUAWEI MediaPad M2 8.0                                                            | Model Name :        | M2-802L      |
| Temperature : | 22° C                                                                             | Relative Humidity : | 55 %         |
| Pressure :    | 1012 hPa                                                                          | Test Voltage :      | AC 120V/60Hz |
| Test Mode :   | Idle + 2.4G wifi + BT + GPS + earphone + Playing – Adapter: BYD(HWBYA32DC1600019) | Phase:              | Neutral      |

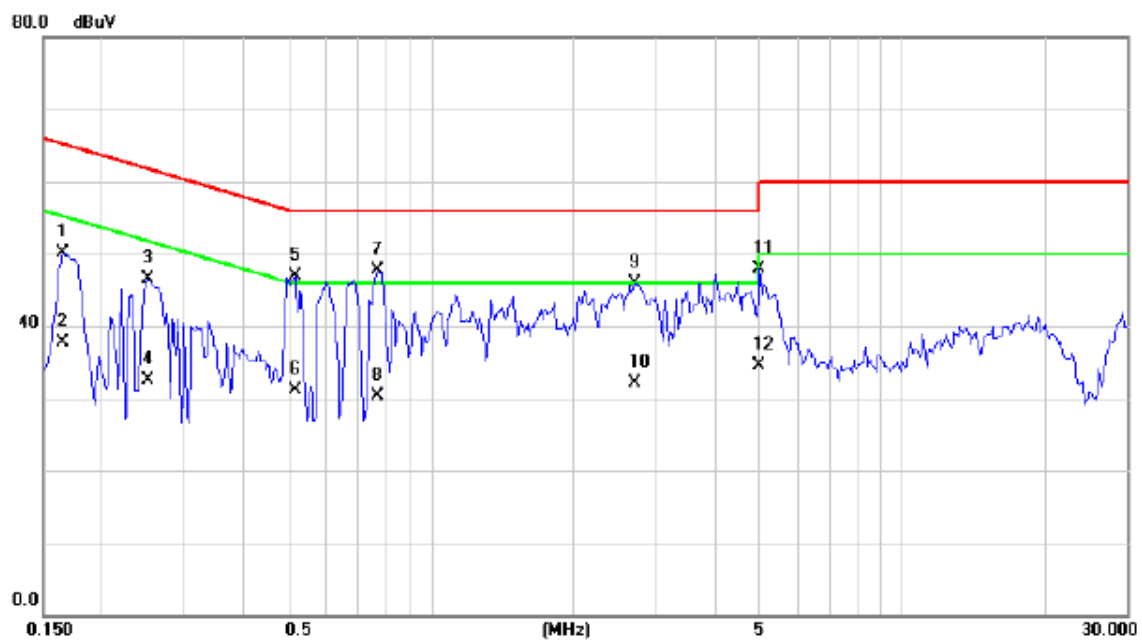


| No. | Mk. | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dB | Measure-<br>ment<br>dBuV | Limit<br>dBuV | Margin<br>dB | Detector | Comment |
|-----|-----|--------------|--------------------------|-------------------------|--------------------------|---------------|--------------|----------|---------|
| 1   |     | 0.1655       | 40.63                    | 9.54                    | 50.17                    | 65.18         | -15.01       | QP       |         |
| 2   |     | 0.1655       | 28.10                    | 9.54                    | 37.64                    | 55.18         | -17.54       | AVG      |         |
| 3   |     | 0.2516       | 36.85                    | 9.56                    | 46.41                    | 61.70         | -15.29       | QP       |         |
| 4   |     | 0.2516       | 22.90                    | 9.56                    | 32.46                    | 51.70         | -19.24       | AVG      |         |
| 5   |     | 0.5132       | 37.31                    | 9.58                    | 46.89                    | 56.00         | -9.11        | QP       |         |
| 6   |     | 0.5132       | 21.50                    | 9.58                    | 31.08                    | 46.00         | -14.92       | AVG      |         |
| 7   |     | 0.7711       | 38.04                    | 9.60                    | 47.64                    | 56.00         | -8.36        | QP       |         |
| 8   |     | 0.7711       | 20.80                    | 9.60                    | 30.40                    | 46.00         | -15.60       | AVG      |         |
| 9   |     | 2.7125       | 36.20                    | 9.62                    | 45.82                    | 56.00         | -10.18       | QP       |         |
| 10  |     | 2.7125       | 22.50                    | 9.62                    | 32.12                    | 46.00         | -13.88       | AVG      |         |
| 11  | *   | 4.9805       | 38.14                    | 9.75                    | 47.89                    | 56.00         | -8.11        | QP       |         |
| 12  |     | 4.9805       | 24.80                    | 9.75                    | 34.55                    | 46.00         | -11.45       | AVG      |         |

|               |                                                                                                 |                     |              |
|---------------|-------------------------------------------------------------------------------------------------|---------------------|--------------|
| E.U.T :       | HUAWEI MediaPad M2 8.0                                                                          | Model Name :        | M2-802L      |
| Temperature : | 22° C                                                                                           | Relative Humidity : | 55 %         |
| Pressure :    | 1012 hPa                                                                                        | Test Voltage :      | AC 120V/60Hz |
| Test Mode :   | Traffic + 2.4G wifi + BT + GPS +<br>earphone + camera on<br>– Adapter:<br>BYD(HWBYA32DC1600019) | Phase:              | Line         |

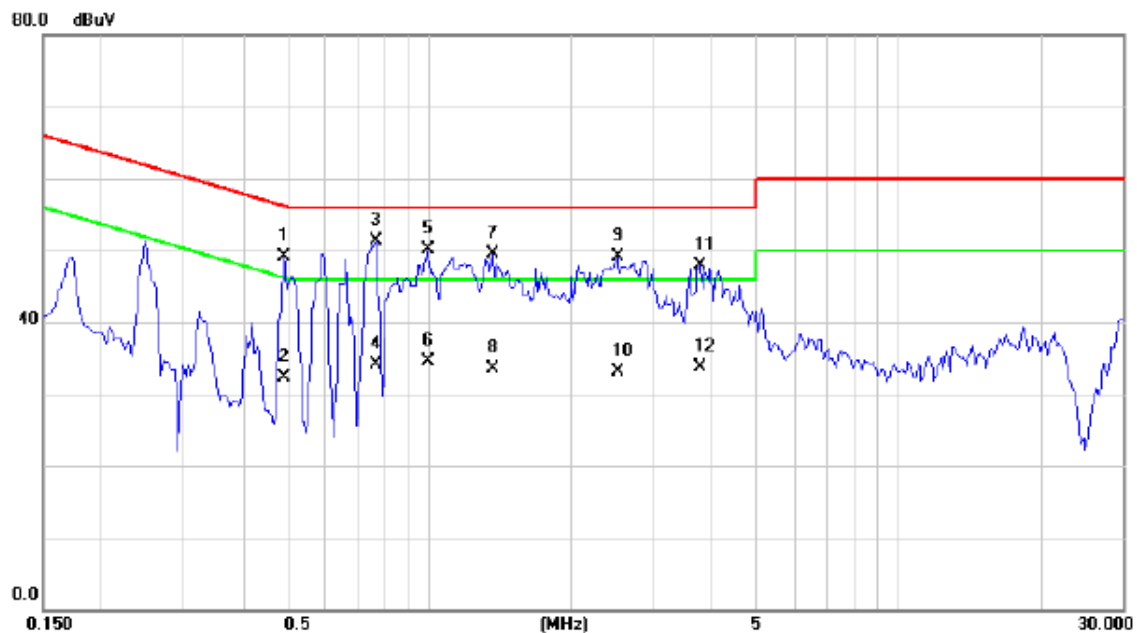


| No. | Mk. | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dB | Measure-<br>ment<br>dBuV | Limit<br>dBuV | Margin<br>dB | Detector | Comment |
|-----|-----|--------------|--------------------------|-------------------------|--------------------------|---------------|--------------|----------|---------|
| 1   |     | 0.4898       | 39.29                    | 9.75                    | 49.04                    | 56.17         | -7.13        | QP       |         |
| 2   |     | 0.4898       | 22.50                    | 9.75                    | 32.25                    | 46.17         | -13.92       | AVG      |         |
| 3   | *   | 0.7672       | 41.52                    | 9.81                    | 51.33                    | 56.00         | -4.67        | QP       |         |
| 4   |     | 0.7672       | 24.30                    | 9.81                    | 34.11                    | 46.00         | -11.89       | AVG      |         |
| 5   |     | 0.9898       | 40.32                    | 9.82                    | 50.14                    | 56.00         | -5.86        | QP       |         |
| 6   |     | 0.9898       | 24.70                    | 9.82                    | 34.52                    | 46.00         | -11.48       | AVG      |         |
| 7   |     | 1.3648       | 39.78                    | 9.80                    | 49.58                    | 56.00         | -6.42        | QP       |         |
| 8   |     | 1.3648       | 23.70                    | 9.80                    | 33.50                    | 46.00         | -12.50       | AVG      |         |
| 9   |     | 2.5133       | 39.41                    | 9.74                    | 49.15                    | 56.00         | -6.85        | QP       |         |
| 10  |     | 2.5133       | 23.40                    | 9.74                    | 33.14                    | 46.00         | -12.86       | AVG      |         |
| 11  |     | 3.7695       | 38.23                    | 9.58                    | 47.81                    | 56.00         | -8.19        | QP       |         |
| 12  |     | 3.7695       | 24.10                    | 9.58                    | 33.68                    | 46.00         | -12.32       | AVG      |         |

|               |                                                                                                 |                     |              |
|---------------|-------------------------------------------------------------------------------------------------|---------------------|--------------|
| E.U.T :       | HUAWEI MediaPad M2 8.0                                                                          | Model Name :        | M2-802L      |
| Temperature : | 22° C                                                                                           | Relative Humidity : | 55 %         |
| Pressure :    | 1012 hPa                                                                                        | Test Voltage :      | AC 120V/60Hz |
| Test Mode :   | Traffic + 2.4G wifi + BT + GPS +<br>earphone + camera on<br>– Adapter:<br>BYD(HWBYA32DC1600019) | Phase:              | Neutral      |

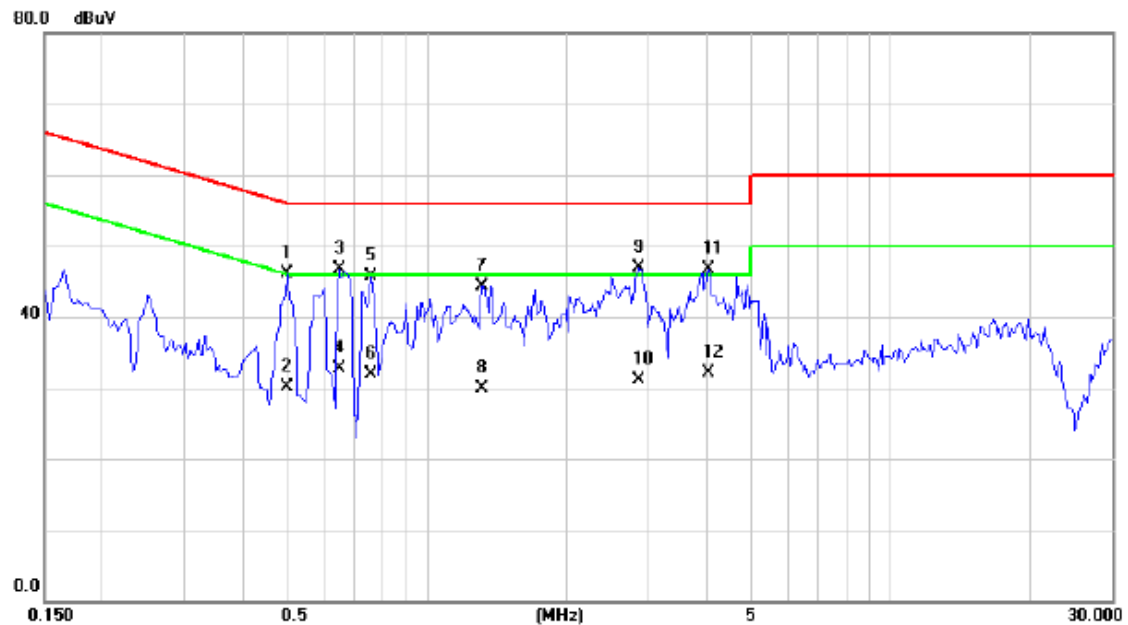


| No. | Mk. | Freq.  | Reading Level | Correct Factor | Measurement | Limit | Margin |          |         |
|-----|-----|--------|---------------|----------------|-------------|-------|--------|----------|---------|
|     |     | MHz    | dBuV          | dB             | dBuV        | dBuV  | dB     | Detector | Comment |
| 1   |     | 0.5016 | 36.52         | 9.58           | 46.10       | 56.00 | -9.90  | QP       |         |
| 2   |     | 0.5016 | 20.50         | 9.58           | 30.08       | 46.00 | -15.92 | AVG      |         |
| 3   |     | 0.6500 | 37.08         | 9.59           | 46.67       | 56.00 | -9.33  | QP       |         |
| 4   |     | 0.6500 | 23.10         | 9.59           | 32.69       | 46.00 | -13.31 | AVG      |         |
| 5   |     | 0.7594 | 36.19         | 9.60           | 45.79       | 56.00 | -10.21 | QP       |         |
| 6   |     | 0.7594 | 22.40         | 9.60           | 32.00       | 46.00 | -14.00 | AVG      |         |
| 7   |     | 1.3220 | 34.75         | 9.64           | 44.39       | 56.00 | -11.61 | QP       |         |
| 8   |     | 1.3220 | 20.30         | 9.64           | 29.94       | 46.00 | -16.06 | AVG      |         |
| 9   | *   | 2.8727 | 37.25         | 9.59           | 46.84       | 56.00 | -9.16  | QP       |         |
| 10  |     | 2.8727 | 21.60         | 9.59           | 31.19       | 46.00 | -14.81 | AVG      |         |
| 11  |     | 4.0547 | 37.08         | 9.68           | 46.76       | 56.00 | -9.24  | QP       |         |
| 12  |     | 4.0547 | 22.50         | 9.68           | 32.18       | 46.00 | -13.82 | AVG      |         |

|               |                                                                                           |                     |              |
|---------------|-------------------------------------------------------------------------------------------|---------------------|--------------|
| E.U.T :       | HUAWEI MediaPad M2 8.0                                                                    | Model Name :        | M2-802L      |
| Temperature : | 22° C                                                                                     | Relative Humidity : | 55 %         |
| Pressure :    | 1012 hPa                                                                                  | Test Voltage :      | AC 120V/60Hz |
| Test Mode :   | Idle + 2.4G wifi + BT + GPS +<br>Speaker + Playing<br>– Adapter:<br>BYD(HWBYA32DC1600019) | Phase:              | Line         |

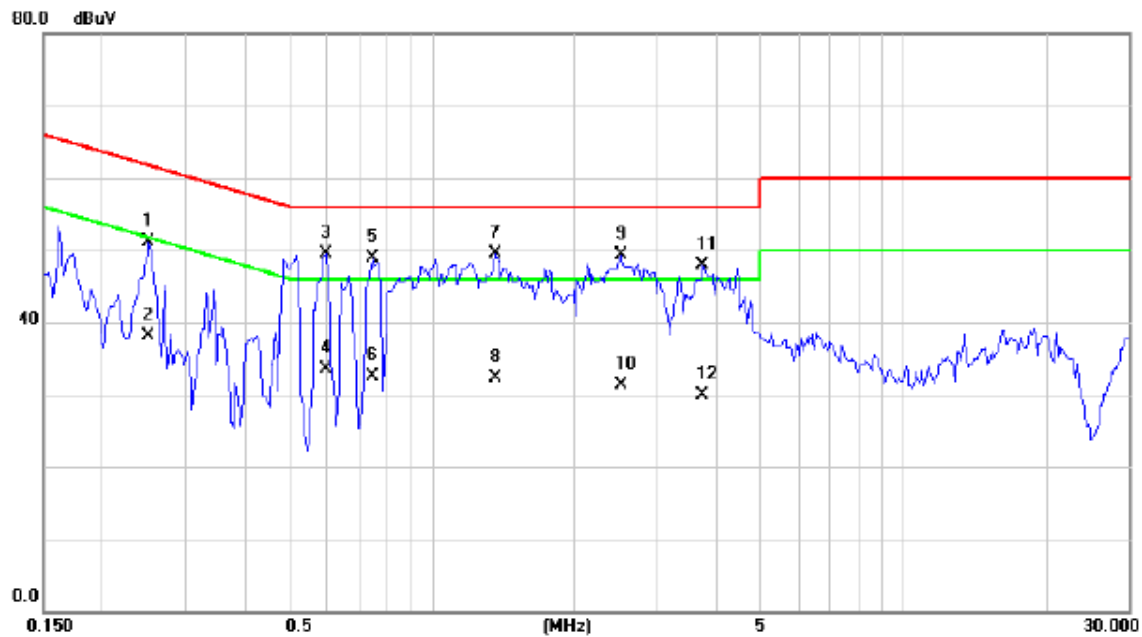


| No. | Mk. | Freq.  | Reading Level | Correct Factor | Measurement | Limit | Margin |          |         |
|-----|-----|--------|---------------|----------------|-------------|-------|--------|----------|---------|
|     |     | MHz    | dBuV          | dB             | dBuV        | dBuV  | dB     | Detector | Comment |
| 1   |     | 0.2516 | 41.38         | 9.67           | 51.05       | 61.70 | -10.65 | QP       |         |
| 2   |     | 0.2516 | 28.50         | 9.67           | 38.17       | 51.70 | -13.53 | AVG      |         |
| 3   |     | 0.5953 | 39.71         | 9.77           | 49.48       | 56.00 | -6.52  | QP       |         |
| 4   |     | 0.5953 | 23.70         | 9.77           | 33.47       | 46.00 | -12.53 | AVG      |         |
| 5   |     | 0.7477 | 39.10         | 9.80           | 48.90       | 56.00 | -7.10  | QP       |         |
| 6   |     | 0.7477 | 22.80         | 9.80           | 32.60       | 46.00 | -13.40 | AVG      |         |
| 7   | *   | 1.3648 | 39.69         | 9.80           | 49.49       | 56.00 | -6.51  | QP       |         |
| 8   |     | 1.3648 | 22.60         | 9.80           | 32.40       | 46.00 | -13.60 | AVG      |         |
| 9   |     | 2.5172 | 39.64         | 9.73           | 49.37       | 56.00 | -6.63  | QP       |         |
| 10  |     | 2.5172 | 21.50         | 9.73           | 31.23       | 46.00 | -14.77 | AVG      |         |
| 11  |     | 3.7540 | 38.27         | 9.58           | 47.85       | 56.00 | -8.15  | QP       |         |
| 12  |     | 3.7540 | 20.30         | 9.58           | 29.88       | 46.00 | -16.12 | AVG      |         |

|               |                                                                                           |                     |              |
|---------------|-------------------------------------------------------------------------------------------|---------------------|--------------|
| E.U.T :       | HUAWEI MediaPad M2 8.0                                                                    | Model Name :        | M2-802L      |
| Temperature : | 22° C                                                                                     | Relative Humidity : | 55 %         |
| Pressure :    | 1012 hPa                                                                                  | Test Voltage :      | AC 120V/60Hz |
| Test Mode :   | Idle + 2.4G wifi + BT + GPS +<br>Speaker + Playing<br>– Adapter:<br>BYD(HWBYA32DC1600019) | Phase:              | Neutral      |

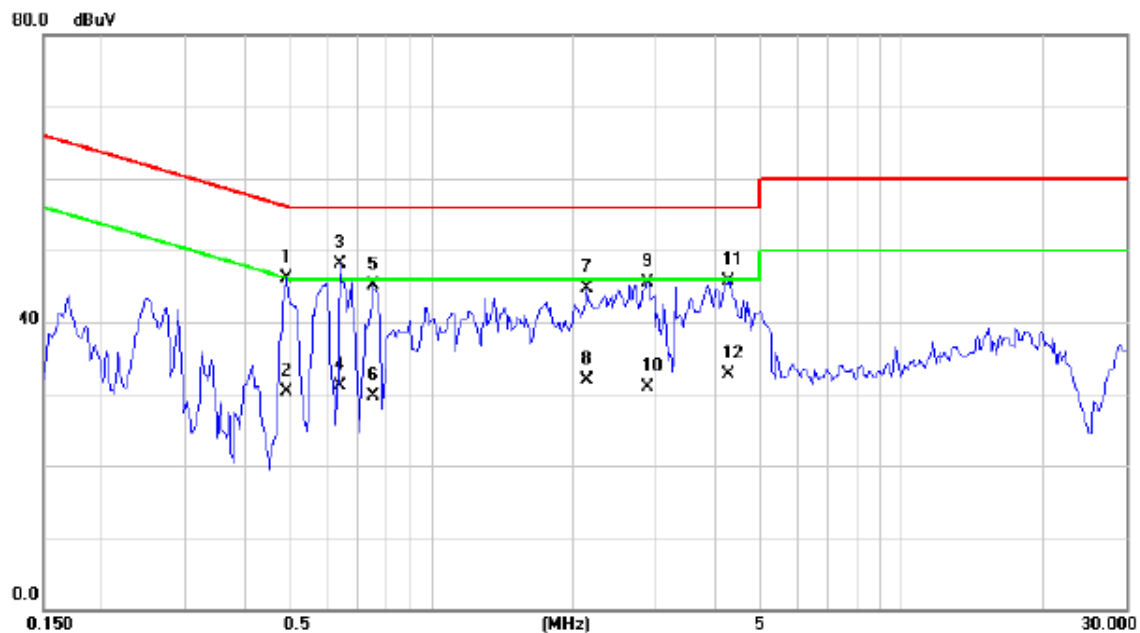


| No. | Mk. | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dB | Measure-<br>ment<br>dBuV | Limit<br>dBuV | Margin<br>dB | Detector | Comment |
|-----|-----|--------------|--------------------------|-------------------------|--------------------------|---------------|--------------|----------|---------|
| 1   |     | 0.4938       | 36.55                    | 9.58                    | 46.13                    | 56.10         | -9.97        | QP       |         |
| 2   |     | 0.4938       | 20.70                    | 9.58                    | 30.28                    | 46.10         | -15.82       | AVG      |         |
| 3   | *   | 0.6422       | 38.44                    | 9.59                    | 48.03                    | 56.00         | -7.97        | QP       |         |
| 4   |     | 0.6422       | 21.50                    | 9.59                    | 31.09                    | 46.00         | -14.91       | AVG      |         |
| 5   |     | 0.7516       | 35.42                    | 9.60                    | 45.02                    | 56.00         | -10.98       | QP       |         |
| 6   |     | 0.7516       | 20.10                    | 9.60                    | 29.70                    | 46.00         | -16.30       | AVG      |         |
| 7   |     | 2.1461       | 35.03                    | 9.72                    | 44.75                    | 56.00         | -11.25       | QP       |         |
| 8   |     | 2.1461       | 22.20                    | 9.72                    | 31.92                    | 46.00         | -14.08       | AVG      |         |
| 9   |     | 2.8961       | 35.97                    | 9.58                    | 45.55                    | 56.00         | -10.45       | QP       |         |
| 10  |     | 2.8961       | 21.30                    | 9.58                    | 30.88                    | 46.00         | -15.12       | AVG      |         |
| 11  |     | 4.3125       | 36.10                    | 9.70                    | 45.80                    | 56.00         | -10.20       | QP       |         |
| 12  |     | 4.3125       | 23.10                    | 9.70                    | 32.80                    | 46.00         | -13.20       | AVG      |         |

|               |                                                                                              |                     |              |
|---------------|----------------------------------------------------------------------------------------------|---------------------|--------------|
| E.U.T :       | HUAWEI MediaPad M2 8.0                                                                       | Model Name :        | M2-802L      |
| Temperature : | 22° C                                                                                        | Relative Humidity : | 55 %         |
| Pressure :    | 1012 hPa                                                                                     | Test Voltage :      | AC 120V/60Hz |
| Test Mode :   | Traffic + 2.4G wifi + BT + GPS +<br>earphone + camera on<br>—Adapter:<br>HK(HWHKA5E32707819) | Phase:              | Line         |

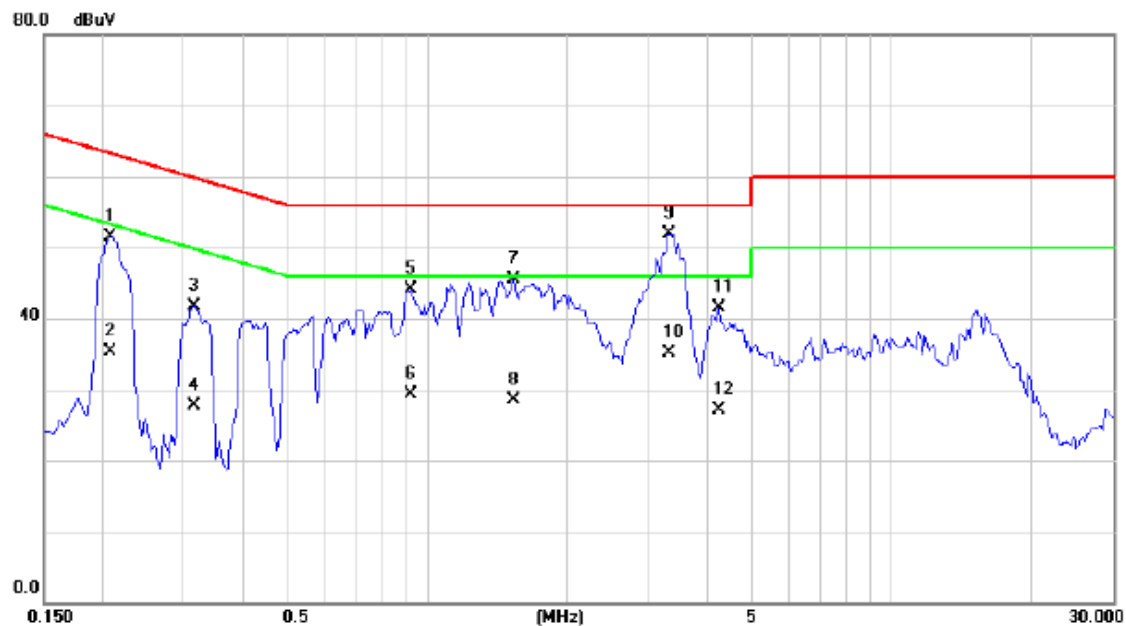


| No. | Mk. | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dB | Measure-<br>ment<br>dBuV | Limit<br>dBuV | Margin<br>dB | Detector | Comment |
|-----|-----|--------------|--------------------------|-------------------------|--------------------------|---------------|--------------|----------|---------|
| 1   |     | 0.2086       | 41.83                    | 9.65                    | 51.48                    | 63.26         | -11.78       | QP       |         |
| 2   |     | 0.2086       | 25.70                    | 9.65                    | 35.35                    | 53.26         | -17.91       | AVG      |         |
| 3   |     | 0.3180       | 32.04                    | 9.71                    | 41.75                    | 59.76         | -18.01       | QP       |         |
| 4   |     | 0.3180       | 17.90                    | 9.71                    | 27.61                    | 49.76         | -22.15       | AVG      |         |
| 5   |     | 0.9273       | 34.32                    | 9.81                    | 44.13                    | 56.00         | -11.87       | QP       |         |
| 6   |     | 0.9273       | 19.50                    | 9.81                    | 29.31                    | 46.00         | -16.69       | AVG      |         |
| 7   |     | 1.5367       | 35.78                    | 9.74                    | 45.52                    | 56.00         | -10.48       | QP       |         |
| 8   |     | 1.5367       | 18.70                    | 9.74                    | 28.44                    | 46.00         | -17.56       | AVG      |         |
| 9   | *   | 3.3047       | 42.34                    | 9.58                    | 51.92                    | 56.00         | -4.08        | QP       |         |
| 10  |     | 3.3047       | 25.50                    | 9.58                    | 35.08                    | 46.00         | -10.92       | AVG      |         |
| 11  |     | 4.2578       | 32.13                    | 9.32                    | 41.45                    | 56.00         | -14.55       | QP       |         |
| 12  |     | 4.2578       | 17.80                    | 9.32                    | 27.12                    | 46.00         | -18.88       | AVG      |         |

|               |                                                                                              |                     |              |
|---------------|----------------------------------------------------------------------------------------------|---------------------|--------------|
| E.U.T :       | HUAWEI MediaPad M2 8.0                                                                       | Model Name :        | M2-802L      |
| Temperature : | 22° C                                                                                        | Relative Humidity : | 55 %         |
| Pressure :    | 1012 hPa                                                                                     | Test Voltage :      | AC 120V/60Hz |
| Test Mode :   | Traffic + 2.4G wifi + BT + GPS +<br>earphone + camera on<br>—Adapter:<br>HK(HWHKA5E32707819) | Phase:              | Neutral      |

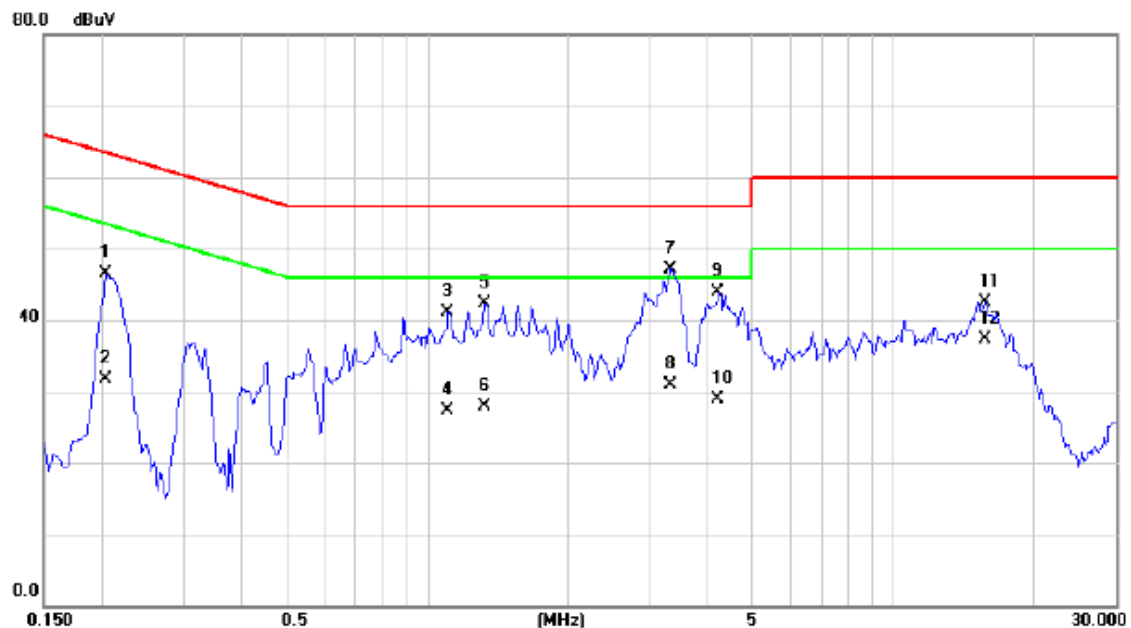


| No. | Mk. | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dB | Measure-<br>ment<br>dBuV | Limit<br>dBuV | Margin<br>dB | Detector | Comment |
|-----|-----|--------------|--------------------------|-------------------------|--------------------------|---------------|--------------|----------|---------|
| 1   |     | 0.2047       | 36.89                    | 9.55                    | 46.44                    | 63.42         | -16.98       | QP       |         |
| 2   |     | 0.2047       | 22.10                    | 9.55                    | 31.65                    | 53.42         | -21.77       | AVG      |         |
| 3   |     | 1.1110       | 31.51                    | 9.64                    | 41.15                    | 56.00         | -14.85       | QP       |         |
| 4   |     | 1.1110       | 17.60                    | 9.64                    | 27.24                    | 46.00         | -18.76       | AVG      |         |
| 5   |     | 1.3297       | 32.59                    | 9.64                    | 42.23                    | 56.00         | -13.77       | QP       |         |
| 6   |     | 1.3297       | 18.30                    | 9.64                    | 27.94                    | 46.00         | -18.06       | AVG      |         |
| 7   | *   | 3.3438       | 37.58                    | 9.60                    | 47.18                    | 56.00         | -8.82        | QP       |         |
| 8   |     | 3.3438       | 21.40                    | 9.60                    | 31.00                    | 46.00         | -15.00       | AVG      |         |
| 9   |     | 4.2188       | 34.25                    | 9.70                    | 43.95                    | 56.00         | -12.05       | QP       |         |
| 10  |     | 4.2188       | 19.30                    | 9.70                    | 29.00                    | 46.00         | -17.00       | AVG      |         |
| 11  |     | 15.7578      | 32.90                    | 9.64                    | 42.54                    | 60.00         | -17.46       | QP       |         |
| 12  |     | 15.7578      | 27.60                    | 9.64                    | 37.24                    | 50.00         | -12.76       | AVG      |         |

|               |                                                  |                     |              |
|---------------|--------------------------------------------------|---------------------|--------------|
| E.U.T :       | HUAWEI MediaPad M2 8.0                           | Model Name :        | M2-802L      |
| Temperature : | 22° C                                            | Relative Humidity : | 55 %         |
| Pressure :    | 1012 hPa                                         | Test Voltage :      | AC 120V/60Hz |
| Test Mode :   | USB R/W + Idle + 2.4G wifi + BT + GPS + earphone | Phase:              | Line         |

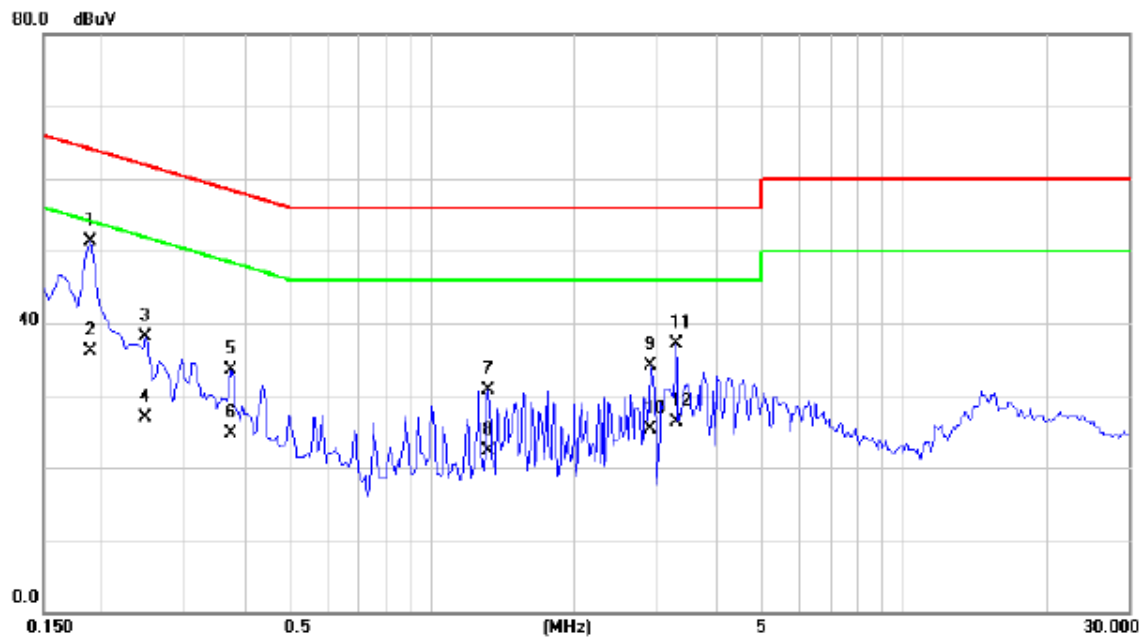


| No. | Mk. | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dB | Measure-<br>ment<br>dBuV | Limit<br>dBuV | Margin<br>dB | Detector | Comment |
|-----|-----|--------------|--------------------------|-------------------------|--------------------------|---------------|--------------|----------|---------|
| 1   | *   | 0.1891       | 41.63                    | 9.64                    | 51.27                    | 64.08         | -12.81       | QP       |         |
| 2   |     | 0.1891       | 26.50                    | 9.64                    | 36.14                    | 54.08         | -17.94       | AVG      |         |
| 3   |     | 0.2477       | 28.52                    | 9.67                    | 38.19                    | 61.83         | -23.64       | QP       |         |
| 4   |     | 0.2477       | 17.30                    | 9.67                    | 26.97                    | 51.83         | -24.86       | AVG      |         |
| 5   |     | 0.3766       | 23.75                    | 9.73                    | 33.48                    | 58.35         | -24.87       | QP       |         |
| 6   |     | 0.3766       | 14.90                    | 9.73                    | 24.63                    | 48.35         | -23.72       | AVG      |         |
| 7   |     | 1.3180       | 20.92                    | 9.82                    | 30.74                    | 56.00         | -25.26       | QP       |         |
| 8   |     | 1.3180       | 12.40                    | 9.82                    | 22.22                    | 46.00         | -23.78       | AVG      |         |
| 9   |     | 2.9038       | 24.41                    | 9.61                    | 34.02                    | 56.00         | -21.98       | QP       |         |
| 10  |     | 2.9038       | 15.60                    | 9.61                    | 25.21                    | 46.00         | -20.79       | AVG      |         |
| 11  |     | 3.2970       | 27.58                    | 9.58                    | 37.16                    | 56.00         | -18.84       | QP       |         |
| 12  |     | 3.2970       | 16.80                    | 9.58                    | 26.38                    | 46.00         | -19.62       | AVG      |         |

|               |                                                  |                     |              |
|---------------|--------------------------------------------------|---------------------|--------------|
| E.U.T :       | HUAWEI MediaPad M2 8.0                           | Model Name :        | M2-802L      |
| Temperature : | 22° C                                            | Relative Humidity : | 55 %         |
| Pressure :    | 1012 hPa                                         | Test Voltage :      | AC 120V/60Hz |
| Test Mode :   | USB R/W + Idle + 2.4G wifi + BT + GPS + earphone | Phase:              | Neutral      |

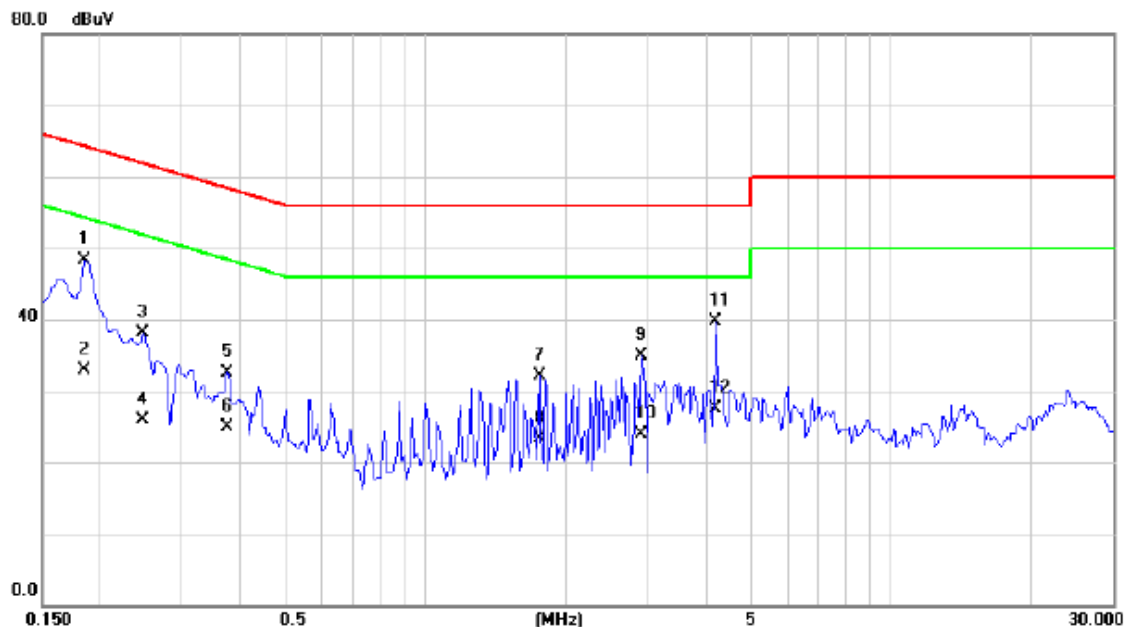


| No. | Mk. | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dB | Measure-<br>ment<br>dBuV | Limit<br>dBuV | Margin<br>dB | Detector | Comment |
|-----|-----|--------------|--------------------------|-------------------------|--------------------------|---------------|--------------|----------|---------|
| 1   | *   | 0.1852       | 38.66                    | 9.55                    | 48.21                    | 64.25         | -16.04       | QP       |         |
| 2   |     | 0.1852       | 23.40                    | 9.55                    | 32.95                    | 54.25         | -21.30       | AVG      |         |
| 3   |     | 0.2477       | 28.48                    | 9.56                    | 38.04                    | 61.83         | -23.79       | QP       |         |
| 4   |     | 0.2477       | 16.30                    | 9.56                    | 25.86                    | 51.83         | -25.97       | AVG      |         |
| 5   |     | 0.3766       | 23.04                    | 9.56                    | 32.60                    | 58.35         | -25.75       | QP       |         |
| 6   |     | 0.3766       | 15.40                    | 9.56                    | 24.96                    | 48.35         | -23.39       | AVG      |         |
| 7   |     | 1.7555       | 22.39                    | 9.70                    | 32.09                    | 56.00         | -23.91       | QP       |         |
| 8   |     | 1.7555       | 13.70                    | 9.70                    | 23.40                    | 46.00         | -22.60       | AVG      |         |
| 9   |     | 2.9000       | 25.40                    | 9.58                    | 34.98                    | 56.00         | -21.02       | QP       |         |
| 10  |     | 2.9000       | 14.30                    | 9.58                    | 23.88                    | 46.00         | -22.12       | AVG      |         |
| 11  |     | 4.2031       | 30.00                    | 9.69                    | 39.69                    | 56.00         | -16.31       | QP       |         |
| 12  |     | 4.2031       | 17.90                    | 9.69                    | 27.59                    | 46.00         | -18.41       | AVG      |         |

|               |                                                                                              |                     |              |
|---------------|----------------------------------------------------------------------------------------------|---------------------|--------------|
| E.U.T :       | HUAWEI MediaPad M2 8.0                                                                       | Model Name :        | M2-802L      |
| Temperature : | 22° C                                                                                        | Relative Humidity : | 55 %         |
| Pressure :    | 1012 hPa                                                                                     | Test Voltage :      | AC 120V/60Hz |
| Test Mode :   | Traffic + 2.4G wifi + BT + GPS +<br>earphone + camera on<br>—Adapter:<br>BYD(B67432F1E00013) | Phase:              | Line         |

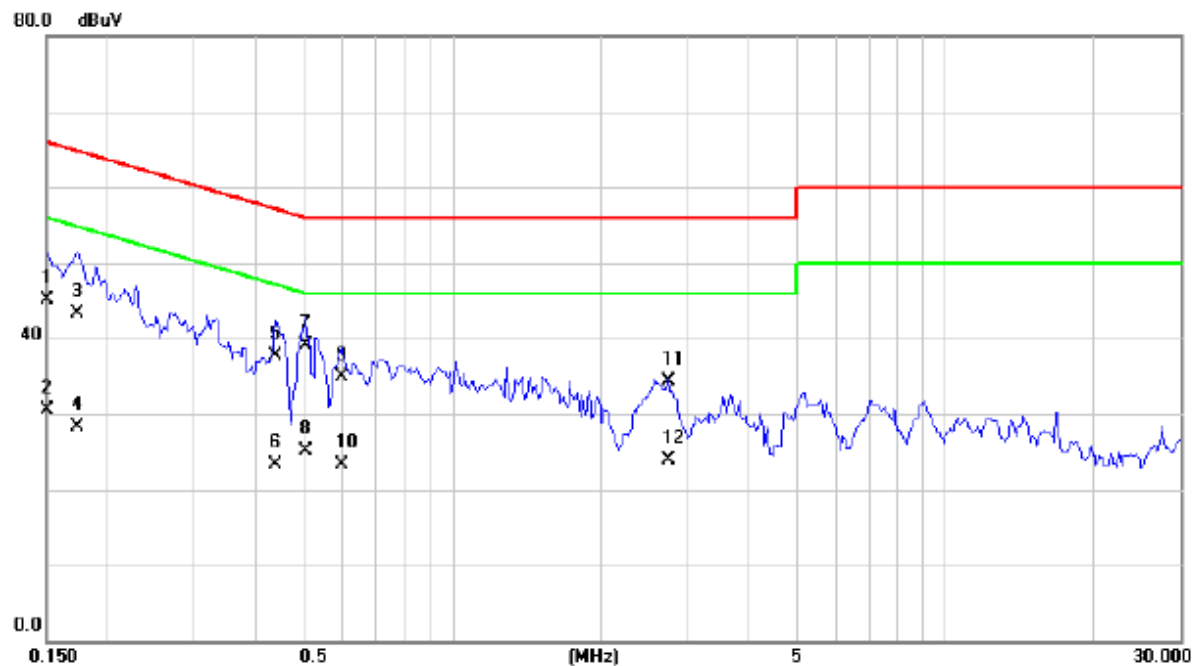


| No. | Mk. | Freq.  | Reading | Correct | Measure- | Limit | Margin |          |         |
|-----|-----|--------|---------|---------|----------|-------|--------|----------|---------|
|     |     | MHz    | Level   | Factor  | ment     |       |        | Detector | Comment |
|     |     |        | dBuV    | dB      | dBuV     | dBuV  | dB     |          |         |
| 1   |     | 0.1500 | 35.50   | 9.54    | 45.04    | 66.00 | -20.96 | QP       |         |
| 2   |     | 0.1500 | 20.90   | 9.54    | 30.44    | 56.00 | -25.56 | AVG      |         |
| 3   |     | 0.1734 | 33.70   | 9.56    | 43.26    | 64.80 | -21.54 | QP       |         |
| 4   |     | 0.1734 | 18.80   | 9.56    | 28.36    | 54.80 | -26.44 | AVG      |         |
| 5   |     | 0.4391 | 28.10   | 9.68    | 37.78    | 57.08 | -19.30 | QP       |         |
| 6   |     | 0.4391 | 13.70   | 9.68    | 23.38    | 47.08 | -23.70 | AVG      |         |
| 7   | *   | 0.5055 | 29.50   | 9.68    | 39.18    | 56.00 | -16.82 | QP       |         |
| 8   |     | 0.5055 | 15.50   | 9.68    | 25.18    | 46.00 | -20.82 | AVG      |         |
| 9   |     | 0.5953 | 25.10   | 9.72    | 34.82    | 56.00 | -21.18 | QP       |         |
| 10  |     | 0.5953 | 13.50   | 9.72    | 23.22    | 46.00 | -22.78 | AVG      |         |
| 11  |     | 2.7437 | 24.30   | 10.01   | 34.31    | 56.00 | -21.69 | QP       |         |
| 12  |     | 2.7437 | 13.80   | 10.01   | 23.81    | 46.00 | -22.19 | AVG      |         |

|               |                                                                                              |                     |              |
|---------------|----------------------------------------------------------------------------------------------|---------------------|--------------|
| E.U.T :       | HUAWEI MediaPad M2 8.0                                                                       | Model Name :        | M2-802L      |
| Temperature : | 22° C                                                                                        | Relative Humidity : | 55 %         |
| Pressure :    | 1012 hPa                                                                                     | Test Voltage :      | AC 120V/60Hz |
| Test Mode :   | Traffic + 2.4G wifi + BT + GPS +<br>earphone + camera on<br>—Adapter:<br>BYD(B67432F1E00013) | Phase:              | Neutral      |

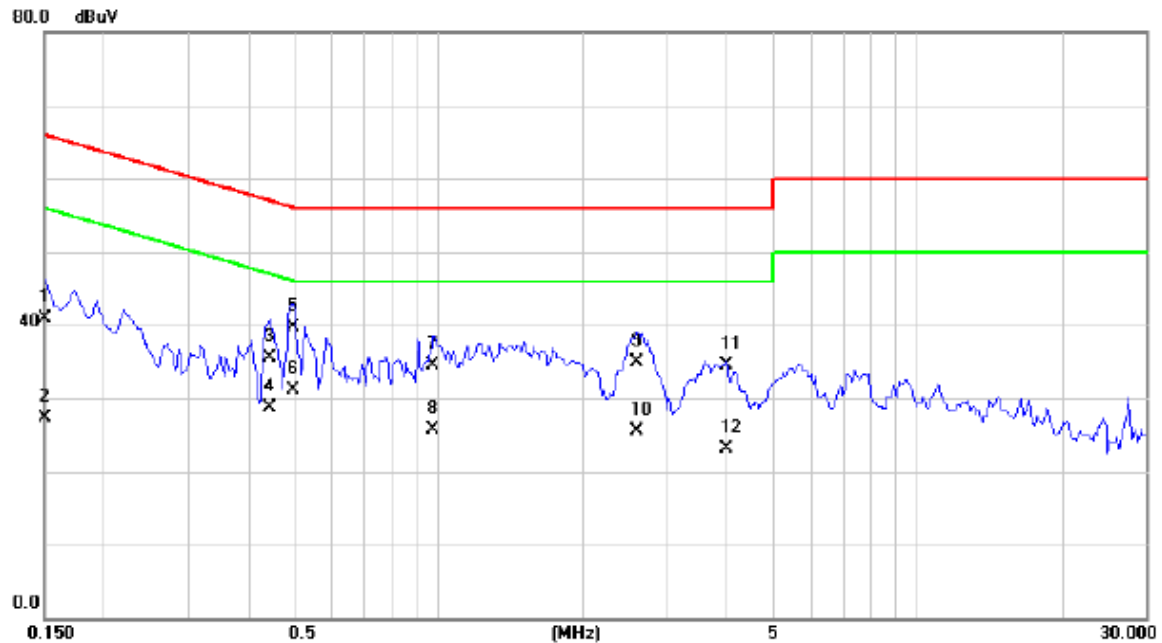

| No. | Mk. | Freq.  | Reading | Correct | Measure- | Limit | Margin |          |         |
|-----|-----|--------|---------|---------|----------|-------|--------|----------|---------|
|     |     | MHz    | Level   | Factor  | ment     |       |        | Detector | Comment |
|     |     |        | dBuV    | dB      | dBuV     | dBuV  | dB     |          |         |
| 1   |     | 0.1500 | 31.40   | 9.49    | 40.89    | 66.00 | -25.11 | QP       |         |
| 2   |     | 0.1500 | 17.80   | 9.49    | 27.29    | 56.00 | -28.71 | AVG      |         |
| 3   |     | 0.4430 | 26.00   | 9.54    | 35.54    | 57.01 | -21.47 | QP       |         |
| 4   |     | 0.4430 | 19.10   | 9.54    | 28.64    | 47.01 | -18.37 | AVG      |         |
| 5   |     | 0.4977 | 30.20   | 9.56    | 39.76    | 56.04 | -16.28 | QP       |         |
| 6   | *   | 0.4977 | 21.60   | 9.56    | 31.16    | 46.04 | -14.88 | AVG      |         |
| 7   |     | 0.9781 | 25.00   | 9.58    | 34.58    | 56.00 | -21.42 | QP       |         |
| 8   |     | 0.9781 | 16.10   | 9.58    | 25.68    | 46.00 | -20.32 | AVG      |         |
| 9   |     | 2.5953 | 25.10   | 9.78    | 34.88    | 56.00 | -21.12 | QP       |         |
| 10  |     | 2.5953 | 15.80   | 9.78    | 25.58    | 46.00 | -20.42 | AVG      |         |
| 11  |     | 4.0038 | 24.60   | 9.92    | 34.52    | 56.00 | -21.48 | QP       |         |
| 12  |     | 4.0038 | 13.20   | 9.92    | 23.12    | 46.00 | -22.88 | AVG      |         |

|               |                                                                                             |                     |              |
|---------------|---------------------------------------------------------------------------------------------|---------------------|--------------|
| E.U.T :       | HUAWEI MediaPad M2 8.0                                                                      | Model Name :        | M2-802L      |
| Temperature : | 22° C                                                                                       | Relative Humidity : | 55 %         |
| Pressure :    | 1012 hPa                                                                                    | Test Voltage :      | AC 120V/60Hz |
| Test Mode :   | Traffic + 2.4G wifi + BT + GPS +<br>earphone + camera on<br>—Adapter:<br>HK(H67416F6100005) | Phase:              | Line         |

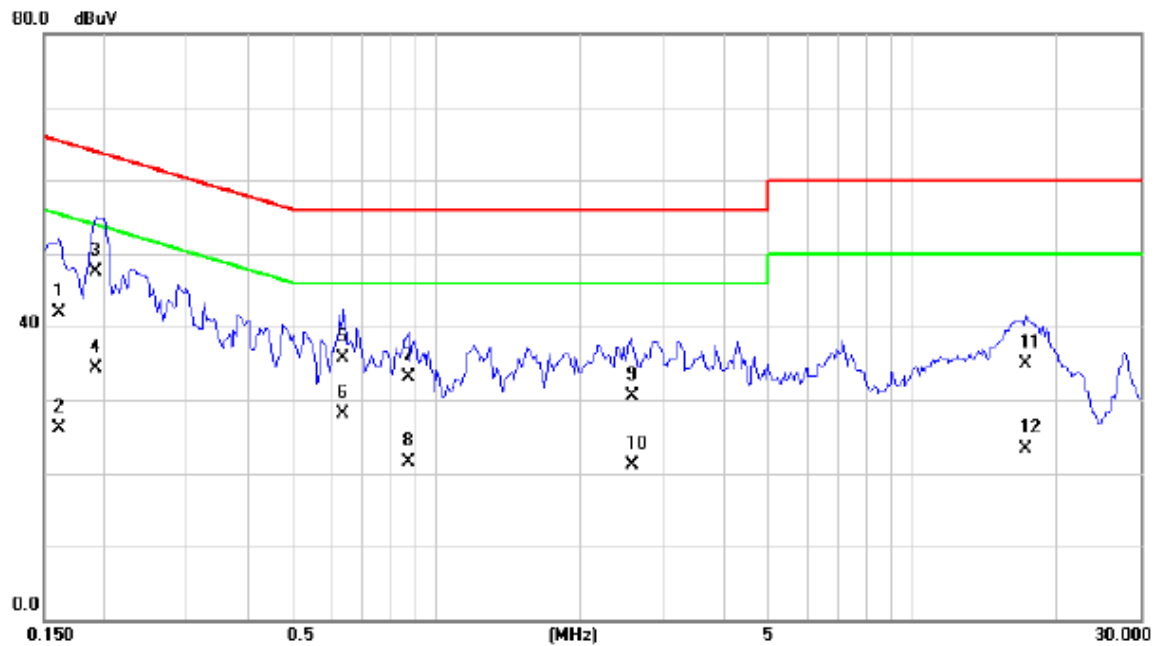


| No. | Mk. | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dB | Measure-<br>ment<br>dBuV | Limit<br>dBuV | Margin<br>dB | Detector | Comment |
|-----|-----|--------------|--------------------------|-------------------------|--------------------------|---------------|--------------|----------|---------|
| 1   |     | 0.1617       | 32.30                    | 9.55                    | 41.85                    | 65.38         | -23.53       | QP       |         |
| 2   |     | 0.1617       | 16.50                    | 9.55                    | 26.05                    | 55.38         | -29.33       | AVG      |         |
| 3   | *   | 0.1930       | 38.00                    | 9.57                    | 47.57                    | 63.91         | -16.34       | QP       |         |
| 4   |     | 0.1930       | 24.80                    | 9.57                    | 34.37                    | 53.91         | -19.54       | AVG      |         |
| 5   |     | 0.6382       | 26.00                    | 9.73                    | 35.73                    | 56.00         | -20.27       | QP       |         |
| 6   |     | 0.6382       | 18.40                    | 9.73                    | 28.13                    | 46.00         | -17.87       | AVG      |         |
| 7   |     | 0.8727       | 23.40                    | 9.77                    | 33.17                    | 56.00         | -22.83       | QP       |         |
| 8   |     | 0.8727       | 11.80                    | 9.77                    | 21.57                    | 46.00         | -24.43       | AVG      |         |
| 9   |     | 2.5720       | 20.60                    | 10.00                   | 30.60                    | 56.00         | -25.40       | QP       |         |
| 10  |     | 2.5720       | 11.20                    | 10.00                   | 21.20                    | 46.00         | -24.80       | AVG      |         |
| 11  |     | 17.2110      | 25.00                    | 9.84                    | 34.84                    | 60.00         | -25.16       | QP       |         |
| 12  |     | 17.2110      | 13.50                    | 9.84                    | 23.34                    | 50.00         | -26.66       | AVG      |         |

|               |                                                                                       |                     |              |
|---------------|---------------------------------------------------------------------------------------|---------------------|--------------|
| E.U.T :       | HUAWEI MediaPad M2 8.0                                                                | Model Name :        | M2-802L      |
| Temperature : | 22° C                                                                                 | Relative Humidity : | 55 %         |
| Pressure :    | 1012 hPa                                                                              | Test Voltage :      | AC 120V/60Hz |
| Test Mode :   | Traffic + 2.4G wifi + BT + GPS + earphone + camera on<br>-Adapter: HK(H67416F6100005) | Phase:              | Neutral      |




| No. | Mk. | Freq.   | Reading | Correct | Measure- | Limit | Margin |          |         |
|-----|-----|---------|---------|---------|----------|-------|--------|----------|---------|
|     |     | MHz     | Level   | Factor  | ment     |       |        | Detector | Comment |
|     |     |         | dBuV    | dB      | dBuV     | dBuV  | dB     |          |         |
| 1   | *   | 0.1970  | 34.40   | 9.50    | 43.90    | 63.74 | -19.84 | QP       |         |
| 2   |     | 0.1970  | 22.90   | 9.50    | 32.40    | 53.74 | -21.34 | AVG      |         |
| 3   |     | 0.6813  | 25.70   | 9.53    | 35.23    | 56.00 | -20.77 | QP       |         |
| 4   |     | 0.6813  | 14.10   | 9.53    | 23.63    | 46.00 | -22.37 | AVG      |         |
| 5   |     | 1.0602  | 21.60   | 9.59    | 31.19    | 56.00 | -24.81 | QP       |         |
| 6   |     | 1.0602  | 10.40   | 9.59    | 19.99    | 46.00 | -26.01 | AVG      |         |
| 7   |     | 2.3687  | 22.80   | 9.75    | 32.55    | 56.00 | -23.45 | QP       |         |
| 8   |     | 2.3687  | 14.90   | 9.75    | 24.65    | 46.00 | -21.35 | AVG      |         |
| 9   |     | 6.5078  | 24.30   | 9.86    | 34.16    | 60.00 | -25.84 | QP       |         |
| 10  |     | 6.5078  | 17.40   | 9.86    | 27.26    | 50.00 | -22.74 | AVG      |         |
| 11  |     | 16.8438 | 23.50   | 9.93    | 33.43    | 60.00 | -26.57 | QP       |         |
| 12  |     | 16.8438 | 16.20   | 9.93    | 26.13    | 50.00 | -23.87 | AVG      |         |

|               |                                                                                                 |                     |              |
|---------------|-------------------------------------------------------------------------------------------------|---------------------|--------------|
| E.U.T :       | HUAWEI MediaPad M2 8.0                                                                          | Model Name :        | M2-802L      |
| Temperature : | 22° C                                                                                           | Relative Humidity : | 55 %         |
| Pressure :    | 1012 hPa                                                                                        | Test Voltage :      | AC 120V/60Hz |
| Test Mode :   | Traffic + 2.4G wifi + BT + GPS +<br>earphone + camera on<br>—Adapter:<br>PHITEK(P67401F5W00017) | Phase:              | Line         |

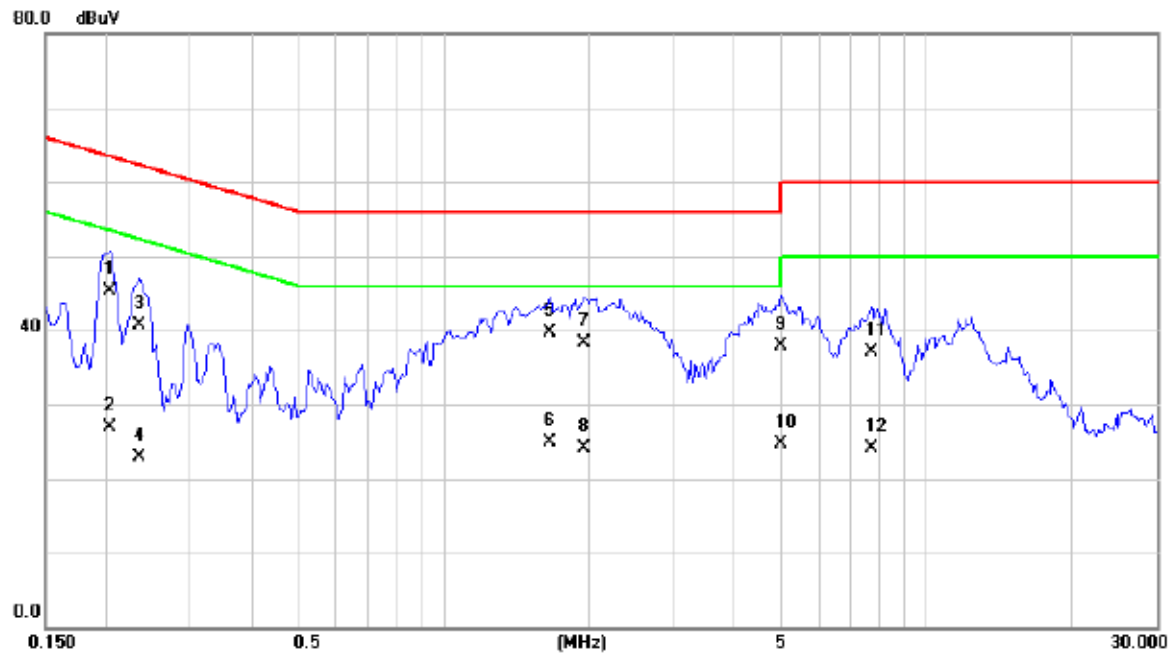


| No. | Mk. | Freq.  | Reading | Correct | Measure- | Limit | Margin |          |         |
|-----|-----|--------|---------|---------|----------|-------|--------|----------|---------|
|     |     | MHz    | Level   | Factor  | ment     |       |        | Detector | Comment |
|     |     |        | dBuV    | dB      | dBuV     | dBuV  | dB     |          |         |
| 1   |     | 0.2047 | 35.80   | 9.57    | 45.37    | 63.42 | -18.05 | QP       |         |
| 2   |     | 0.2047 | 17.30   | 9.57    | 26.87    | 53.42 | -26.55 | AVG      |         |
| 3   |     | 0.2360 | 31.20   | 9.60    | 40.80    | 62.24 | -21.44 | QP       |         |
| 4   |     | 0.2360 | 13.30   | 9.60    | 22.90    | 52.24 | -29.34 | AVG      |         |
| 5   | *   | 1.6695 | 29.80   | 9.86    | 39.66    | 56.00 | -16.34 | QP       |         |
| 6   |     | 1.6695 | 15.10   | 9.86    | 24.96    | 46.00 | -21.04 | AVG      |         |
| 7   |     | 1.9508 | 28.30   | 9.91    | 38.21    | 56.00 | -17.79 | QP       |         |
| 8   |     | 1.9508 | 14.20   | 9.91    | 24.11    | 46.00 | -21.89 | AVG      |         |
| 9   |     | 5.0273 | 27.90   | 9.99    | 37.89    | 60.00 | -22.11 | QP       |         |
| 10  |     | 5.0273 | 14.80   | 9.99    | 24.79    | 50.00 | -25.21 | AVG      |         |
| 11  |     | 7.7148 | 27.10   | 9.91    | 37.01    | 60.00 | -22.99 | QP       |         |
| 12  |     | 7.7148 | 14.10   | 9.91    | 24.01    | 50.00 | -25.99 | AVG      |         |

|               |                                                                                                 |                     |              |
|---------------|-------------------------------------------------------------------------------------------------|---------------------|--------------|
| E.U.T :       | HUAWEI MediaPad M2 8.0                                                                          | Model Name :        | M2-802L      |
| Temperature : | 22° C                                                                                           | Relative Humidity : | 55 %         |
| Pressure :    | 1012 hPa                                                                                        | Test Voltage :      | AC 120V/60Hz |
| Test Mode :   | Traffic + 2.4G wifi + BT + GPS +<br>earphone + camera on<br>—Adapter:<br>PHITEK(P67401F5W00017) | Phase:              | Neutral      |

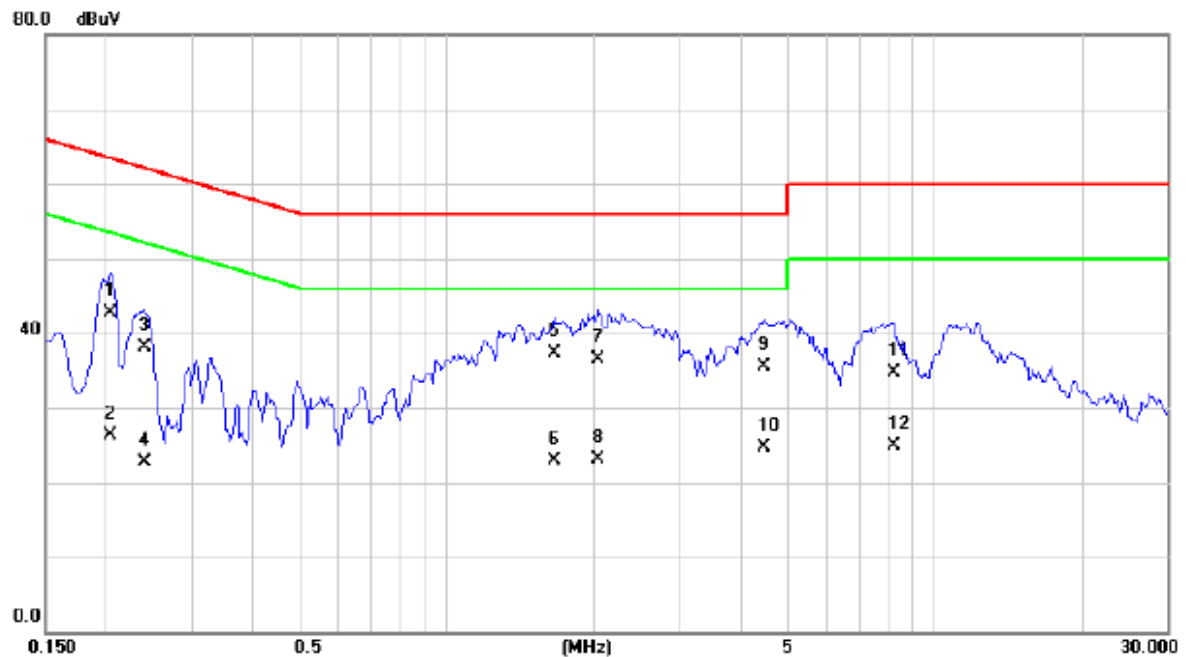


| No. | Mk. | Freq.  | Reading | Correct | Measure- | Limit | Margin |          |         |
|-----|-----|--------|---------|---------|----------|-------|--------|----------|---------|
|     |     | MHz    | Level   | Factor  | ment     |       |        | Detector | Comment |
|     |     |        | dBuV    | dB      | dBuV     | dBuV  | dB     |          |         |
| 1   |     | 0.2047 | 33.30   | 9.50    | 42.80    | 63.42 | -20.62 | QP       |         |
| 2   |     | 0.2047 | 16.80   | 9.50    | 26.30    | 53.42 | -27.12 | AVG      |         |
| 3   |     | 0.2398 | 28.50   | 9.51    | 38.01    | 62.10 | -24.09 | QP       |         |
| 4   |     | 0.2398 | 13.20   | 9.51    | 22.71    | 52.10 | -29.39 | AVG      |         |
| 5   | *   | 1.6656 | 27.70   | 9.68    | 37.38    | 56.00 | -18.62 | QP       |         |
| 6   |     | 1.6656 | 13.20   | 9.68    | 22.88    | 46.00 | -23.12 | AVG      |         |
| 7   |     | 2.0445 | 26.70   | 9.72    | 36.42    | 56.00 | -19.58 | QP       |         |
| 8   |     | 2.0445 | 13.30   | 9.72    | 23.02    | 46.00 | -22.98 | AVG      |         |
| 9   |     | 4.4766 | 25.60   | 9.91    | 35.51    | 56.00 | -20.49 | QP       |         |
| 10  |     | 4.4766 | 14.80   | 9.91    | 24.71    | 46.00 | -21.29 | AVG      |         |
| 11  |     | 8.2852 | 24.90   | 9.85    | 34.75    | 60.00 | -25.25 | QP       |         |
| 12  |     | 8.2852 | 15.00   | 9.85    | 24.85    | 50.00 | -25.15 | AVG      |         |

|               |                                                                                                  |                     |              |
|---------------|--------------------------------------------------------------------------------------------------|---------------------|--------------|
| E.U.T :       | HUAWEI MediaPad M2 8.0                                                                           | Model Name :        | M2-802L      |
| Temperature : | 22° C                                                                                            | Relative Humidity : | 55 %         |
| Pressure :    | 1012 hPa                                                                                         | Test Voltage :      | AC 120V/60Hz |
| Test Mode :   | Traffic + 2.4G wifi + BT + GPS +<br>earphone + camera on<br>—Adapter:<br>YINYJU (Y67401F3G00038) | Phase:              | Line         |

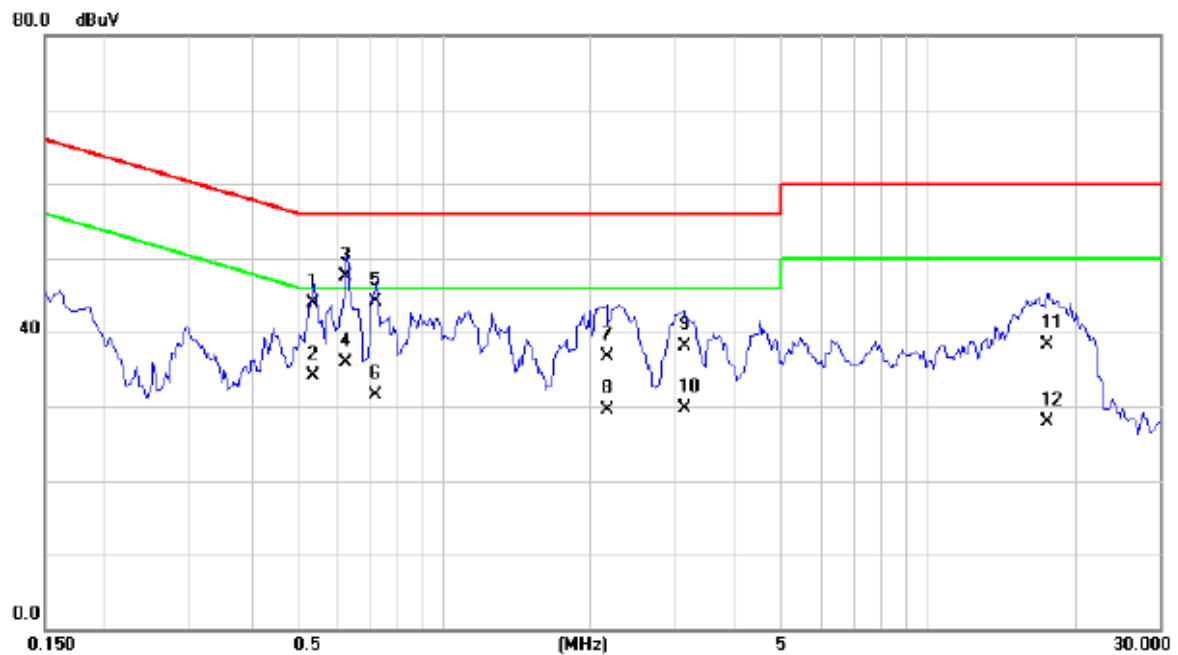

| No. | Mk. | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dB | Measure-<br>ment<br>dBuV | Limit<br>dBuV | Margin<br>dB | Detector | Comment |
|-----|-----|--------------|--------------------------|-------------------------|--------------------------|---------------|--------------|----------|---------|
| 1   |     | 0.5406       | 34.30                    | 9.70                    | 44.00                    | 56.00         | -12.00       | QP       |         |
| 2   |     | 0.5406       | 24.50                    | 9.70                    | 34.20                    | 46.00         | -11.80       | AVG      |         |
| 3   | *   | 0.6305       | 37.80                    | 9.73                    | 47.53                    | 56.00         | -8.47        | QP       |         |
| 4   |     | 0.6305       | 26.10                    | 9.73                    | 35.83                    | 46.00         | -10.17       | AVG      |         |
| 5   |     | 0.7242       | 34.40                    | 9.74                    | 44.14                    | 56.00         | -11.86       | QP       |         |
| 6   |     | 0.7242       | 21.80                    | 9.74                    | 31.54                    | 46.00         | -14.46       | AVG      |         |
| 7   |     | 2.1695       | 26.80                    | 9.94                    | 36.74                    | 56.00         | -19.26       | QP       |         |
| 8   |     | 2.1695       | 19.50                    | 9.94                    | 29.44                    | 46.00         | -16.56       | AVG      |         |
| 9   |     | 3.1563       | 28.00                    | 10.03                   | 38.03                    | 56.00         | -17.97       | QP       |         |
| 10  |     | 3.1563       | 19.60                    | 10.03                   | 29.63                    | 46.00         | -16.37       | AVG      |         |
| 11  |     | 17.6445      | 28.50                    | 9.83                    | 38.33                    | 60.00         | -21.67       | QP       |         |
| 12  |     | 17.6445      | 18.10                    | 9.83                    | 27.93                    | 50.00         | -22.07       | AVG      |         |

|               |                                                                                                  |                     |              |
|---------------|--------------------------------------------------------------------------------------------------|---------------------|--------------|
| E.U.T :       | HUAWEI MediaPad M2 8.0                                                                           | Model Name :        | M2-802L      |
| Temperature : | 22° C                                                                                            | Relative Humidity : | 55 %         |
| Pressure :    | 1012 hPa                                                                                         | Test Voltage :      | AC 120V/60Hz |
| Test Mode :   | Traffic + 2.4G wifi + BT + GPS +<br>earphone + camera on<br>—Adapter: YINYJU<br>(Y67401F3G00038) | Phase:              | Neutral      |

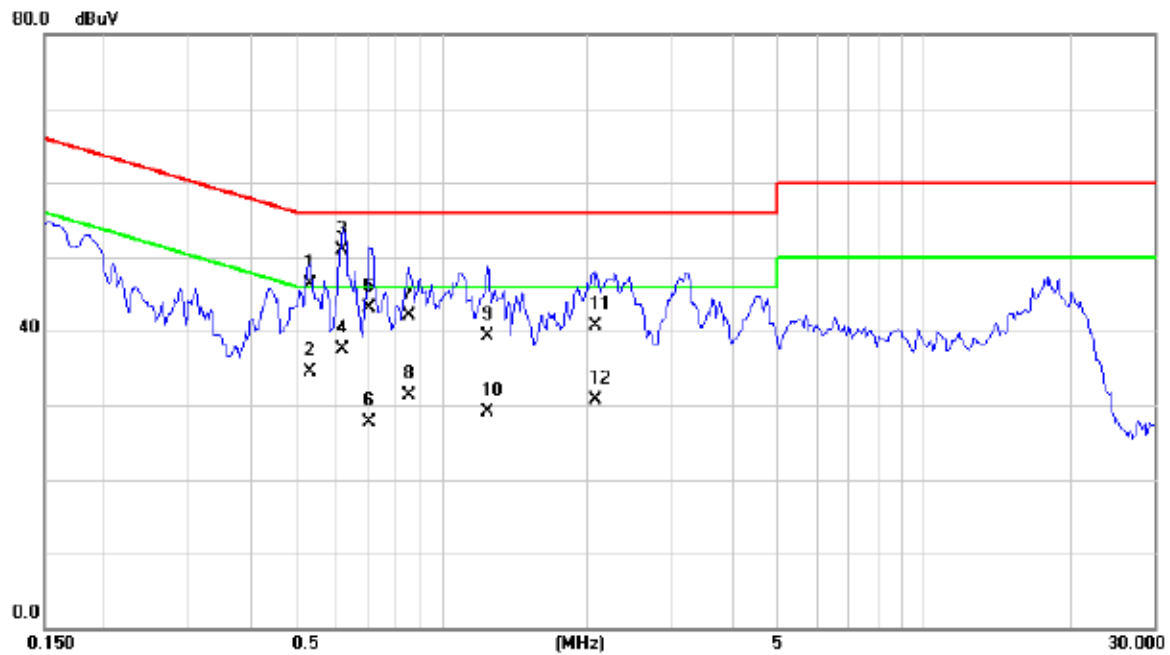

| No. | Mk. | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dB | Measure-<br>ment<br>dBuV | Limit<br>dBuV | Margin<br>dB | Detector | Comment |
|-----|-----|--------------|--------------------------|-------------------------|--------------------------|---------------|--------------|----------|---------|
| 1   |     | 0.5328       | 36.70                    | 9.56                    | 46.26                    | 56.00         | -9.74        | QP       |         |
| 2   |     | 0.5328       | 25.00                    | 9.56                    | 34.56                    | 46.00         | -11.44       | AVG      |         |
| 3   | *   | 0.6227       | 41.30                    | 9.56                    | 50.86                    | 56.00         | -5.14        | QP       |         |
| 4   |     | 0.6227       | 28.00                    | 9.56                    | 37.56                    | 46.00         | -8.44        | AVG      |         |
| 5   |     | 0.7086       | 33.60                    | 9.53                    | 43.13                    | 56.00         | -12.87       | QP       |         |
| 6   |     | 0.7086       | 18.10                    | 9.53                    | 27.63                    | 46.00         | -18.37       | AVG      |         |
| 7   |     | 0.8531       | 32.50                    | 9.58                    | 42.08                    | 56.00         | -13.92       | QP       |         |
| 8   |     | 0.8531       | 21.70                    | 9.58                    | 31.28                    | 46.00         | -14.72       | AVG      |         |
| 9   |     | 1.2437       | 29.60                    | 9.62                    | 39.22                    | 56.00         | -16.78       | QP       |         |
| 10  |     | 1.2437       | 19.40                    | 9.62                    | 29.02                    | 46.00         | -16.98       | AVG      |         |
| 11  |     | 2.0953       | 30.90                    | 9.73                    | 40.63                    | 56.00         | -15.37       | QP       |         |
| 12  |     | 2.0953       | 20.90                    | 9.73                    | 30.63                    | 46.00         | -15.37       | AVG      |         |

## 4.2 RADIATED EMISSION MEASUREMENT

### 4.2.1 LIMITS OF RADIATED EMISSION MEASUREMENT

**Below 1 GHz**

**Measurement Method and Applied Limits:**

**ANSI C63.4:**

| Frequency<br>(MHz) | Class A (at 10m)         |                            | Class B (at 3m)          |                            |
|--------------------|--------------------------|----------------------------|--------------------------|----------------------------|
|                    | (uV/m)<br>Field strength | (dBuV/m)<br>Field strength | (uV/m)<br>Field strength | (dBuV/m)<br>Field strength |
| 30 - 88            | 90                       | 39                         | 100                      | 40                         |
| 88 - 216           | 150                      | 43.5                       | 150                      | 43.5                       |
| 216 - 960          | 210                      | 46.4                       | 200                      | 46                         |
| Above 960          | 300                      | 49.5                       | 500                      | 54                         |

**CISPR 22 or CAN/CSA-CISPR 22-10:**

| Frequency<br>(MHz) | Class A (at 10m) | Class B (at 10m) |
|--------------------|------------------|------------------|
|                    | dBuV/m           |                  |
| 30 - 230           | 40               | 30               |
| 230 - 1000         | 47               | 37               |

**Above 1 GHz**

**Measurement Method and Applied Limits:**

**ANSI C63.4:**

| Frequency<br>(MHz) | Class A          |         |                   |         | Class B          |         |
|--------------------|------------------|---------|-------------------|---------|------------------|---------|
|                    | (dBuV/m) (at 3m) |         | (dBuV/m) (at 10m) |         | (dBuV/m) (at 3m) |         |
|                    | Peak             | Average | Peak              | Average | Peak             | Average |
| Above 1000         | 80               | 60      | 69.5              | 49.5    | 74               | 54      |

### FREQUENCY RANGE OF RADIATED MEASUREMENT (FOR UNINTENTIONAL RADIATORS)

| Highest frequency generated or Upper frequency of measurement used in the device or on which the device operates or tunes (MHz) | Range (MHz)                                                                     |
|---------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------|
| Below 1.705                                                                                                                     | 30                                                                              |
| 1.705 - 108                                                                                                                     | 1000                                                                            |
| 108 - 500                                                                                                                       | 2000                                                                            |
| 500 - 1000                                                                                                                      | 5000                                                                            |
| Above 1000                                                                                                                      | 5 <sup>th</sup> harmonic of the highest frequency or 40 GHz, whichever is lower |

**NOTE:**

- (1) The limit for radiated test was performed according to as following:  
FCC Part 15, Subpart B;
- (2) The tighter limit applies at the band edges.
- (3) Emission level (dBuV/m)=20log Emission level (uV/m).  
3m Emission level = 10m Emission level + 20log(10m/3m).
- (4) The test result calculated as following:  
Measurement Value = Reading Level + Correct Factor  
Correct Factor = Antenna Factor + Cable Loss - Amplifier Gain(if use)  
Margin Level = Measurement Value - Limit Value

#### 4.2.2 MEASUREMENT INSTRUMENTS LIST

| Item | Kind of Equipment    | Manufacturer       | Type No.                | Serial No. | Calibrated until |
|------|----------------------|--------------------|-------------------------|------------|------------------|
| 1    | Log-Bicon Antenna    | Schwarzbeck        | VULB 9168               | 9168-352   | Jul. 09, 2015    |
| 2    | Pre-Amplifier        | Anritsu            | MH648A                  | M92649     | Apr. 16, 2016    |
| 3    | Test Cable           | TIMES              | LMR-400                 | 12M        | May. 13, 2015    |
| 4    | Test Cable           | TIMES              | LMR-400                 | 3M         | May. 13, 2015    |
| 5    | EMI Test Receiver    | Agilent            | N9038A                  | MY51210215 | Apr. 21, 2016    |
| 6    | Microflex Cable      | HARBOUR INDUSTRIES | 27478 LL142             | 1M         | May. 12, 2015    |
| 7    | Horn Antenna (1G)    | Schwarzbeck        | BBHA 9120 D             | 9120D-325  | Jan. 11, 2016    |
| 8    | Pre_Amplifier        | Agilent            | 8449B                   | 3008A01714 | Apr. 14, 2016    |
| 9    | Microflex Cable      | HARBOUR INDUSTRIES | 27478 LL142             | 1M         | May. 12, 2015    |
| 10   | Microflex Cable      | AISI               | S104-SMAP-1             | 10M        | May. 14, 2015    |
| 11   | Microflex Cable      | HARBOUR INDUSTRIES | 27478 LL142             | 3M         | May. 12, 2015    |
| 12   | EMI Test Receiver    | Agilent            | N9038A                  | MY51210215 | Apr. 21, 2016    |
| 13   | Measurement Software | EZ                 | EZ EMC (Version NB-03A) | N/A        | N/A              |

Remark: “ N/A” denotes no model name, serial No. or no calibration specified.

#### 4.2.3 TEST PROCEDURE


- The measuring distance of 3 m shall be used for measurements. The EUT was placed on the top of a rotating table 0.8 meter above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.(below 1GHz)
- The measuring distance of 3 m shall be used for measurements. The EUT was placed on the top of a rotating table 0.8 meter above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.(above 1GHz)
- The height of the equipment or of the substitution antenna shall be 0.8 m, the height of the test antenna shall vary between 1 m to 4 m. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- The initial step in collecting radiated emission data is a receiver peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured.
- All readings are Peak unless otherwise stated QP in column of Note. Peak denotes that the Peak reading compliance with the QP Limits and then QP Mode measurement didn't perform. (below 1GHz)
- All readings are Peak Mode value unless otherwise stated AVG in column of Note. If the Peak Mode Measured value compliance with the Peak Limits and lower than AVG Limits, the EUT shall be deemed to meet both Peak & AVG Limits and then only Peak Mode was measured, but AVG Mode didn't perform. (above 1GHz)
- For the actual test configuration, please refer to the related Item –EUT Test Photos.

#### 4.2.4 DEVIATION FROM TEST STANDARD


No deviation

#### 4.2.5 TESTSETUP

##### (A) Radiated Emission Test Set-Up Frequency Below 1 GHz

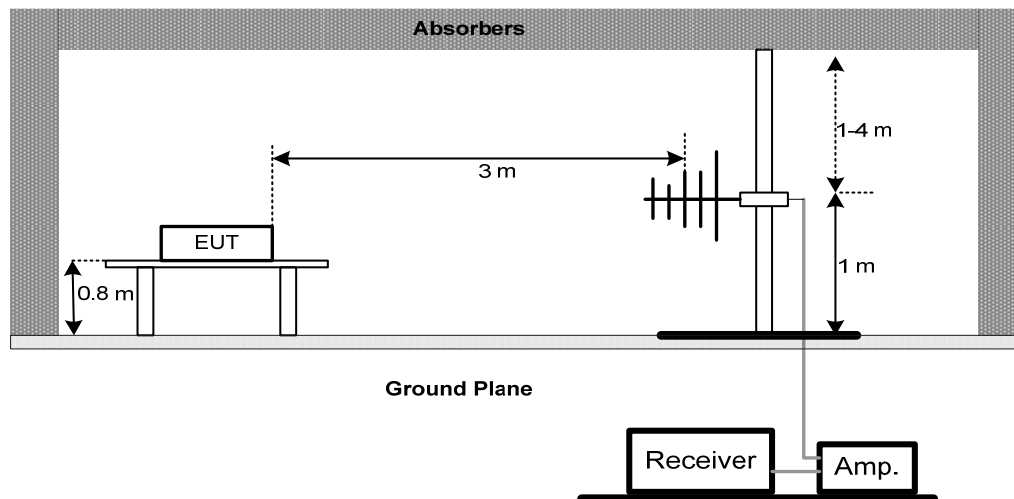

##### (B) Radiated Emission Test Set-Up Frequency Above 1 GHz

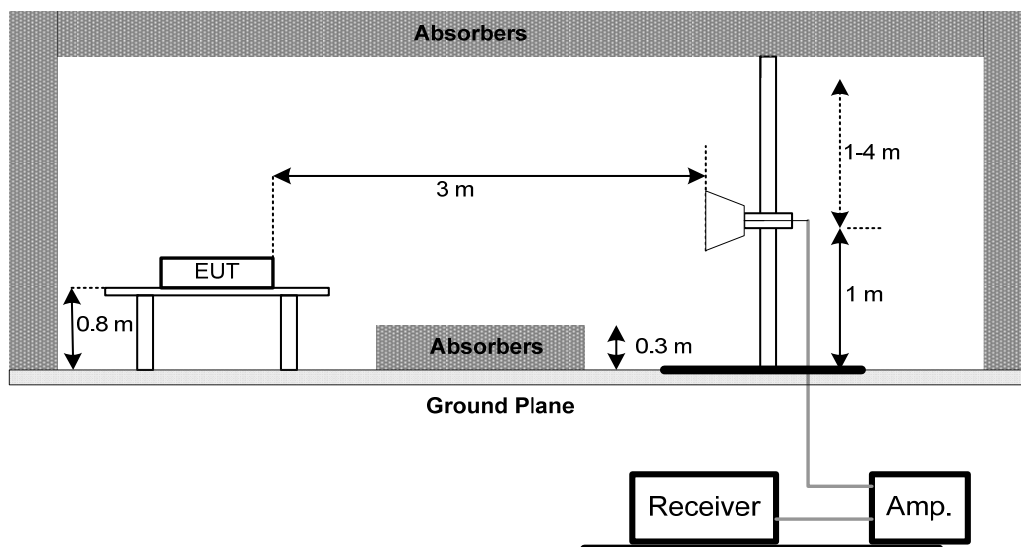

#### 4.2.6 EUT OPERATING CONDITIONS


The EUT tested system was configured as the statements of **4.1.6** unless otherwise a special operating condition is specified in the follows during the testing.

#### **4.2.7 TEST RESULTS-BETWEEN 30MHZ AND 1000MHZ**

Remark:


- (1) Measuring frequency range from 30MHz to 1000MHz.
- (2) If the peak scan value lower limit more than 20dB, then this signal data does not show in table.

|               |                                                                                                       |                     |              |
|---------------|-------------------------------------------------------------------------------------------------------|---------------------|--------------|
| E.U.T :       | HUAWEI MediaPad M2 8.0                                                                                | Model Name :        | M2-802L      |
| Temperature : | 22° C                                                                                                 | Relative Humidity : | 55 %         |
| Pressure :    | 1012 hPa                                                                                              | Test Voltage :      | AC 120V/60Hz |
| Test Mode :   | Idle + 2.4G wifi + BT + GPS +<br>earphone + Playing<br>– Adapter: BYD / Desktop<br>(HWBYA32DC1600019) | Polarization:       | Vertical     |

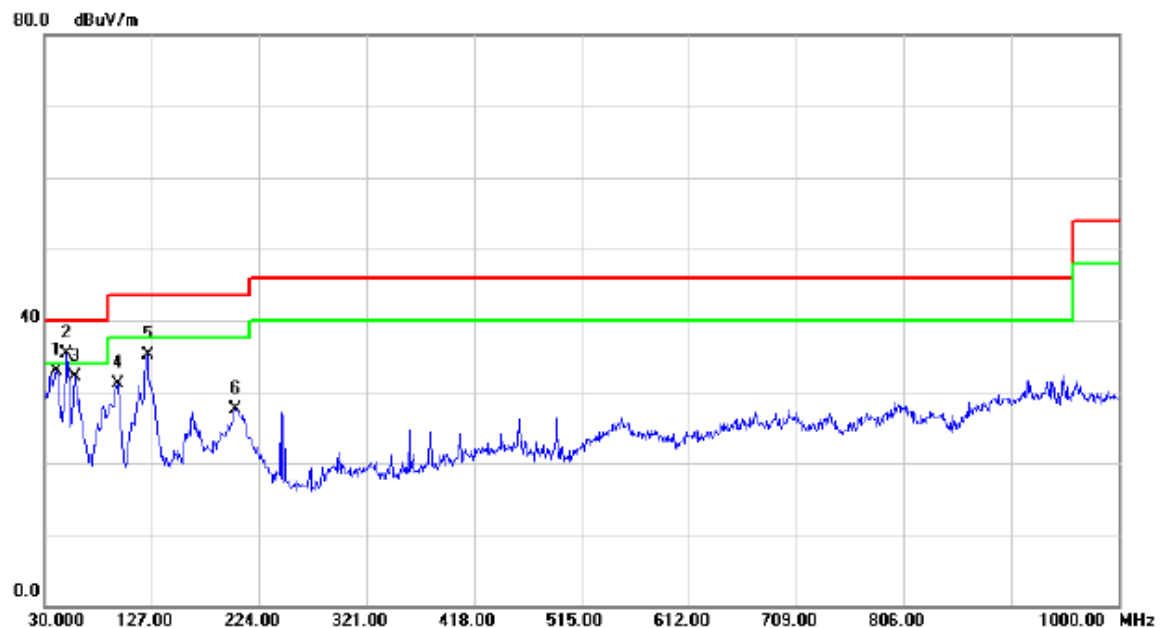


| No. | Mk. | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dB | Measure-<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|-----|--------------|--------------------------|-------------------------|----------------------------|-----------------|--------------|----------|---------|
| 1   |     | 40.6700      | 47.13                    | -14.13                  | 33.00                      | 40.00           | -7.00        | QP       |         |
| 2   | *   | 50.3700      | 49.05                    | -13.73                  | 35.32                      | 40.00           | -4.68        | QP       |         |
| 3   |     | 57.1600      | 46.50                    | -14.44                  | 32.06                      | 40.00           | -7.94        | QP       |         |
| 4   |     | 95.9600      | 50.46                    | -19.43                  | 31.03                      | 43.50           | -12.47       | QP       |         |
| 5   |     | 123.1200     | 51.08                    | -15.94                  | 35.14                      | 43.50           | -8.36        | QP       |         |
| 6   |     | 202.6600     | 44.26                    | -16.68                  | 27.58                      | 43.50           | -15.92       | QP       |         |

|               |                                                                                                       |                     |              |
|---------------|-------------------------------------------------------------------------------------------------------|---------------------|--------------|
| E.U.T :       | HUAWEI MediaPad M2 8.0                                                                                | Model Name :        | M2-802L      |
| Temperature : | 22° C                                                                                                 | Relative Humidity : | 55 %         |
| Pressure :    | 1012 hPa                                                                                              | Test Voltage :      | AC 120V/60Hz |
| Test Mode :   | Idle + 2.4G wifi + BT + GPS +<br>earphone + Playing<br>– Adapter: BYD / Desktop<br>(HWBYA32DC1600019) | Polarization:       | Horizontal   |

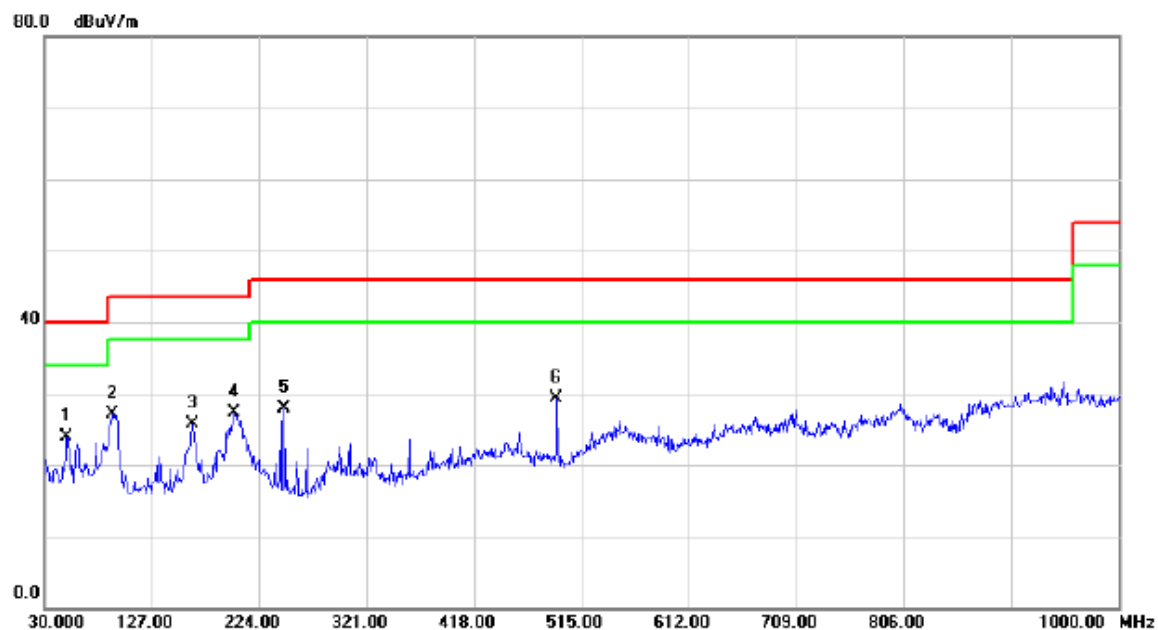


| No. | Mk. | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dB | Measure-<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|-----|--------------|--------------------------|-------------------------|----------------------------|-----------------|--------------|----------|---------|
| 1   | *   | 50.3700      | 37.69                    | -13.73                  | 23.96                      | 40.00           | -16.04       | QP       |         |
| 2   |     | 91.1100      | 47.17                    | -20.16                  | 27.01                      | 43.50           | -16.49       | QP       |         |
| 3   |     | 163.8600     | 39.81                    | -14.11                  | 25.70                      | 43.50           | -17.80       | QP       |         |
| 4   |     | 200.7200     | 43.98                    | -16.71                  | 27.27                      | 43.50           | -16.23       | QP       |         |
| 5   |     | 246.3100     | 43.16                    | -15.19                  | 27.97                      | 46.00           | -18.03       | QP       |         |
| 6   |     | 492.6900     | 38.72                    | -9.36                   | 29.36                      | 46.00           | -16.64       | QP       |         |

|               |                                                                                                           |                     |              |
|---------------|-----------------------------------------------------------------------------------------------------------|---------------------|--------------|
| E.U.T :       | HUAWEI MediaPad M2 8.0                                                                                    | Model Name :        | M2-802L      |
| Temperature : | 22° C                                                                                                     | Relative Humidity : | 55 %         |
| Pressure :    | 1012 hPa                                                                                                  | Test Voltage :      | AC 120V/60Hz |
| Test Mode :   | Idle + 2.4G wifi + BT + GPS +<br>earphone + Playing<br>– Adapter: BYD / Set upright<br>(HWBYA32DC1600019) | Polarization:       | Vertical     |

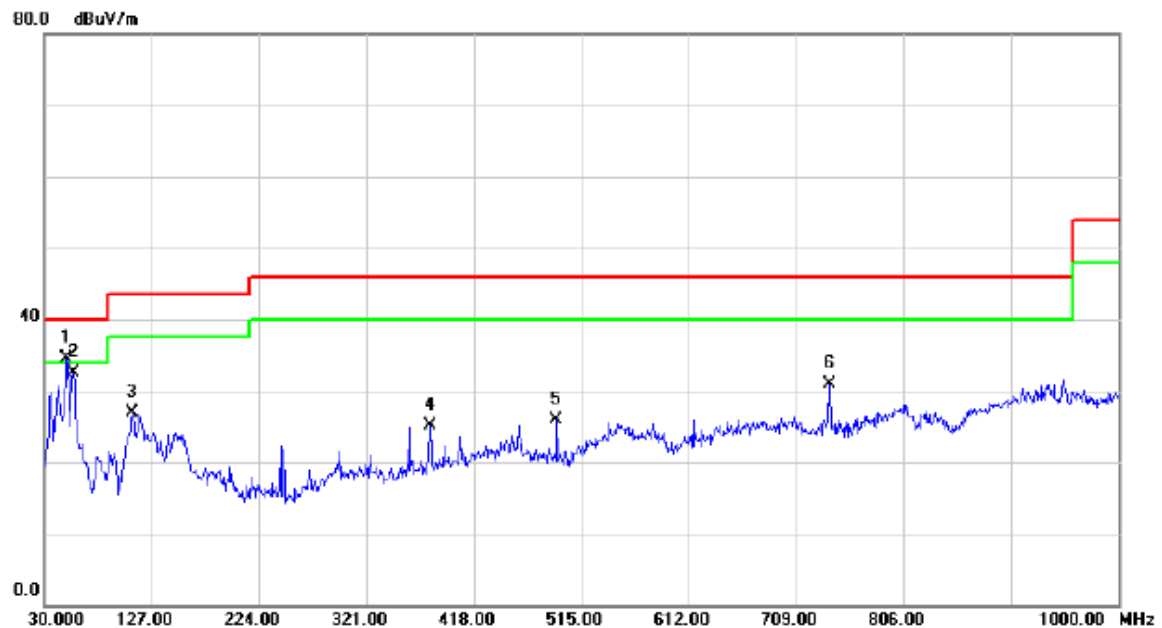


| No. | Mk. | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dB | Measure-<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|-----|--------------|--------------------------|-------------------------|----------------------------|-----------------|--------------|----------|---------|
| 1   | *   | 50.3700      | 48.20                    | -13.73                  | 34.47                      | 40.00           | -5.53        | QP       |         |
| 2   |     | 56.1900      | 46.84                    | -14.34                  | 32.50                      | 40.00           | -7.50        | QP       |         |
| 3   |     | 109.5400     | 44.20                    | -17.39                  | 26.81                      | 43.50           | -16.69       | QP       |         |
| 4   |     | 378.2300     | 36.79                    | -11.64                  | 25.15                      | 46.00           | -20.85       | QP       |         |
| 5   |     | 492.6900     | 35.29                    | -9.36                   | 25.93                      | 46.00           | -20.07       | QP       |         |
| 6   |     | 739.0700     | 35.91                    | -5.10                   | 30.81                      | 46.00           | -15.19       | QP       |         |

|               |                                                                                                           |                     |              |
|---------------|-----------------------------------------------------------------------------------------------------------|---------------------|--------------|
| E.U.T :       | HUAWEI MediaPad M2 8.0                                                                                    | Model Name :        | M2-802L      |
| Temperature : | 22° C                                                                                                     | Relative Humidity : | 55 %         |
| Pressure :    | 1012 hPa                                                                                                  | Test Voltage :      | AC 120V/60Hz |
| Test Mode :   | Idle + 2.4G wifi + BT + GPS +<br>earphone + Playing<br>– Adapter: BYD / Set upright<br>(HWBYA32DC1600019) | Polarization:       | Horizontal   |

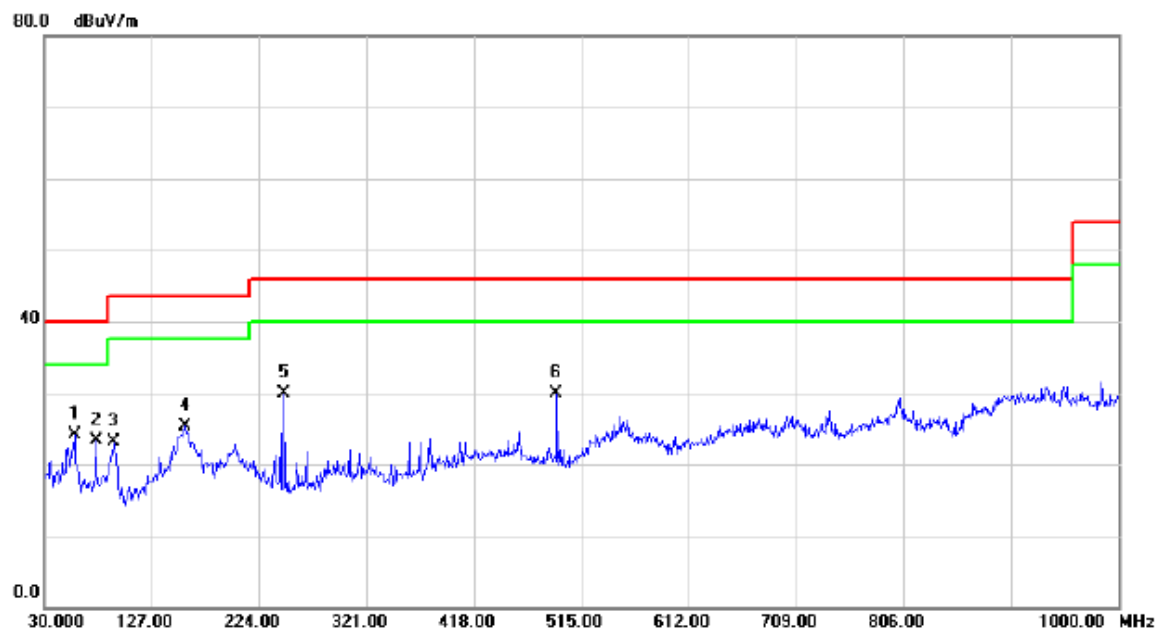


| No. | Mk. | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dB | Measure-<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|-----|--------------|--------------------------|-------------------------|----------------------------|-----------------|--------------|----------|---------|
| 1   | *   | 57.1600      | 38.47                    | -14.44                  | 24.03                      | 40.00           | -15.97       | QP       |         |
| 2   |     | 76.5600      | 40.86                    | -17.48                  | 23.38                      | 40.00           | -16.62       | QP       |         |
| 3   |     | 93.0500      | 43.03                    | -19.86                  | 23.17                      | 43.50           | -20.33       | QP       |         |
| 4   |     | 157.0700     | 39.23                    | -13.96                  | 25.27                      | 43.50           | -18.23       | QP       |         |
| 5   |     | 246.3100     | 45.17                    | -15.19                  | 29.98                      | 46.00           | -16.02       | QP       |         |
| 6   |     | 492.6900     | 39.27                    | -9.36                   | 29.91                      | 46.00           | -16.09       | QP       |         |

|               |                                                                                                            |                     |              |
|---------------|------------------------------------------------------------------------------------------------------------|---------------------|--------------|
| E.U.T :       | HUAWEI MediaPad M2 8.0                                                                                     | Model Name :        | M2-802L      |
| Temperature : | 22° C                                                                                                      | Relative Humidity : | 55 %         |
| Pressure :    | 1012 hPa                                                                                                   | Test Voltage :      | AC 120V/60Hz |
| Test Mode :   | Traffic + 2.4G wifi + BT + GPS +<br>earphone + camera on<br>– Adapter: BYD / Desktop<br>(HWBYA32DC1600019) | Polarization:       | Vertical     |

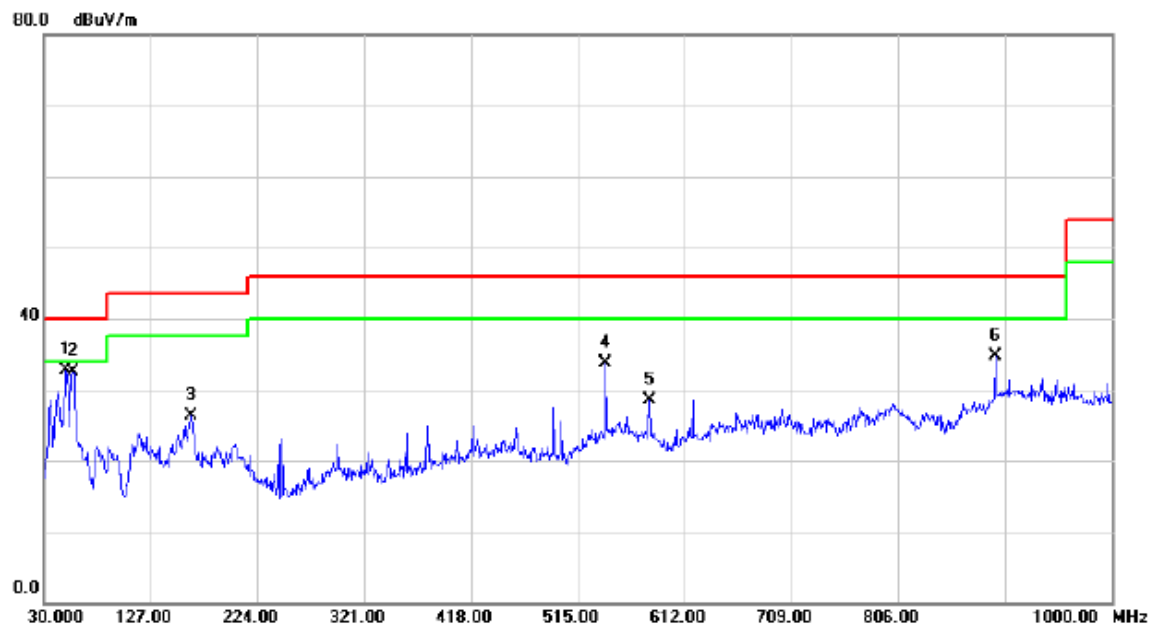


| No. | Mk. | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dB | Measure-<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|-----|--------------|--------------------------|-------------------------|----------------------------|-----------------|--------------|----------|---------|
| 1   | *   | 50.3700      | 46.49                    | -13.73                  | 32.76                      | 40.00           | -7.24        | QP       |         |
| 2   |     | 56.1900      | 46.75                    | -14.34                  | 32.41                      | 40.00           | -7.59        | QP       |         |
| 3   |     | 163.8600     | 40.35                    | -14.11                  | 26.24                      | 43.50           | -17.26       | QP       |         |
| 4   |     | 540.2200     | 41.87                    | -8.24                   | 33.63                      | 46.00           | -12.37       | QP       |         |
| 5   |     | 579.9900     | 36.25                    | -7.67                   | 28.58                      | 46.00           | -17.42       | QP       |         |
| 6   |     | 894.2700     | 37.60                    | -2.94                   | 34.66                      | 46.00           | -11.34       | QP       |         |

|               |                                                                                                            |                     |              |
|---------------|------------------------------------------------------------------------------------------------------------|---------------------|--------------|
| E.U.T :       | HUAWEI MediaPad M2 8.0                                                                                     | Model Name :        | M2-802L      |
| Temperature : | 22° C                                                                                                      | Relative Humidity : | 55 %         |
| Pressure :    | 1012 hPa                                                                                                   | Test Voltage :      | AC 120V/60Hz |
| Test Mode :   | Traffic + 2.4G wifi + BT + GPS +<br>earphone + camera on<br>– Adapter: BYD / Desktop<br>(HWBYA32DC1600019) | Polarization:       | Horizontal   |

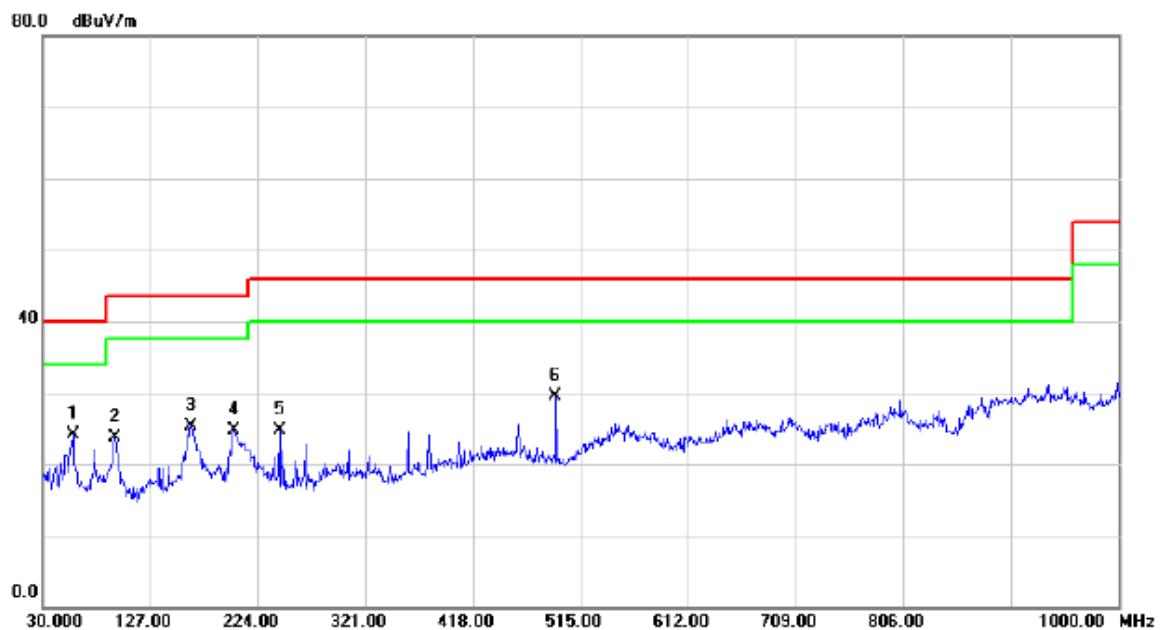


| No. | Mk. | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dB | Measure-<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|-----|--------------|--------------------------|-------------------------|----------------------------|-----------------|--------------|----------|---------|
| 1   | *   | 57.1600      | 38.63                    | -14.44                  | 24.19                      | 40.00           | -15.81       | QP       |         |
| 2   |     | 94.9900      | 43.31                    | -19.58                  | 23.73                      | 43.50           | -19.77       | QP       |         |
| 3   |     | 163.8600     | 39.32                    | -14.11                  | 25.21                      | 43.50           | -18.29       | QP       |         |
| 4   |     | 202.6600     | 41.38                    | -16.68                  | 24.70                      | 43.50           | -18.80       | QP       |         |
| 5   |     | 243.4000     | 40.01                    | -15.22                  | 24.79                      | 46.00           | -21.21       | QP       |         |
| 6   |     | 492.6900     | 38.88                    | -9.36                   | 29.52                      | 46.00           | -16.48       | QP       |         |

|               |                                                                                                     |                     |              |
|---------------|-----------------------------------------------------------------------------------------------------|---------------------|--------------|
| E.U.T :       | HUAWEI MediaPad M2 8.0                                                                              | Model Name :        | M2-802L      |
| Temperature : | 22° C                                                                                               | Relative Humidity : | 55 %         |
| Pressure :    | 1012 hPa                                                                                            | Test Voltage :      | AC 120V/60Hz |
| Test Mode :   | Idle + 2.4G wifi + BT + GPS +<br>Speaker + Playing– Adapter: BYD /<br>Desktop<br>(HWBYA32DC1600019) | Polarization:       | Vertical     |

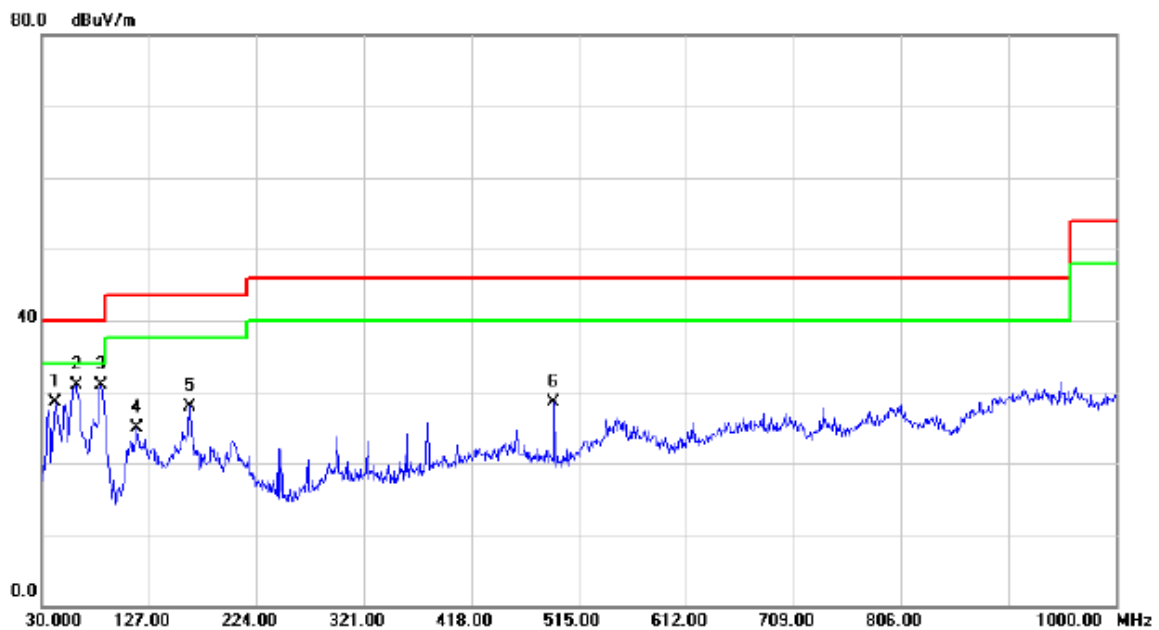


| No. | Mk. | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dB | Measure-<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|-----|--------------|--------------------------|-------------------------|----------------------------|-----------------|--------------|----------|---------|
| 1   |     | 42.6100      | 42.36                    | -13.92                  | 28.44                      | 40.00           | -11.56       | QP       |         |
| 2   |     | 61.0400      | 45.73                    | -14.90                  | 30.83                      | 40.00           | -9.17        | QP       |         |
| 3   | *   | 83.3500      | 49.84                    | -18.86                  | 30.98                      | 40.00           | -9.02        | QP       |         |
| 4   |     | 115.3600     | 41.73                    | -16.74                  | 24.99                      | 43.50           | -18.51       | QP       |         |
| 5   |     | 163.8600     | 41.92                    | -14.11                  | 27.81                      | 43.50           | -15.69       | QP       |         |
| 6   |     | 492.6900     | 37.84                    | -9.36                   | 28.48                      | 46.00           | -17.52       | QP       |         |

|               |                                                                                                     |                     |              |
|---------------|-----------------------------------------------------------------------------------------------------|---------------------|--------------|
| E.U.T :       | HUAWEI MediaPad M2 8.0                                                                              | Model Name :        | M2-802L      |
| Temperature : | 22° C                                                                                               | Relative Humidity : | 55 %         |
| Pressure :    | 1012 hPa                                                                                            | Test Voltage :      | AC 120V/60Hz |
| Test Mode :   | Idle + 2.4G wifi + BT + GPS +<br>Speaker + Playing– Adapter: BYD /<br>Desktop<br>(HWBYA32DC1600019) | Polarization:       | Horizontal   |

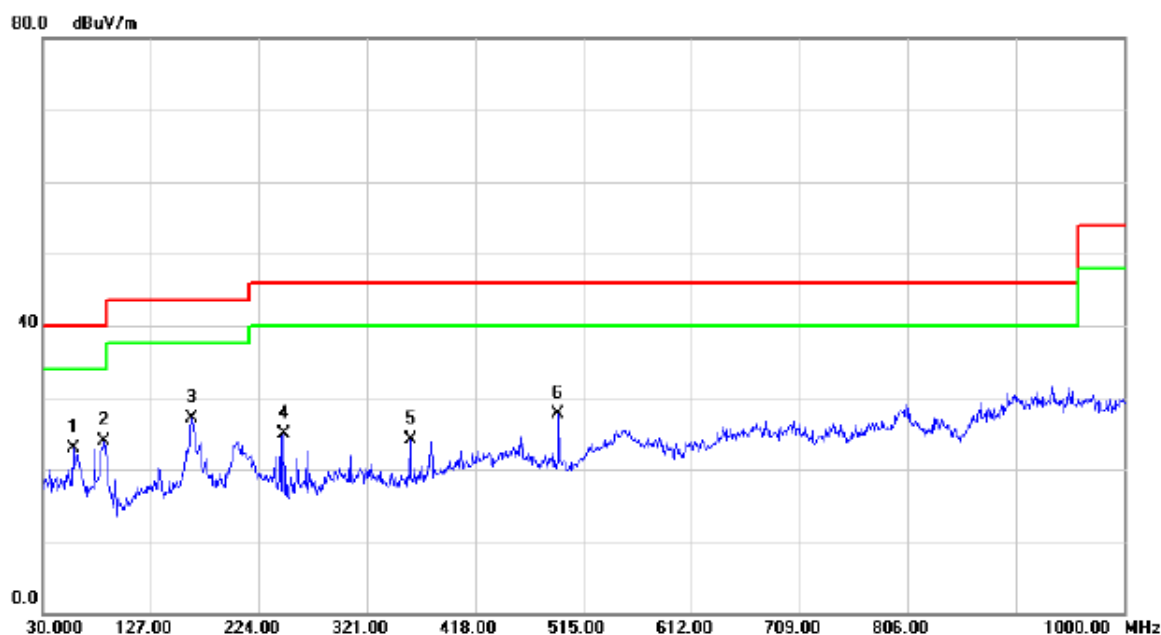


| No. | Mk. | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dB | Measure-<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|-----|--------------|--------------------------|-------------------------|----------------------------|-----------------|--------------|----------|---------|
| 1   |     | 57.1600      | 37.43                    | -14.44                  | 22.99                      | 40.00           | -17.01       | QP       |         |
| 2   | *   | 85.2900      | 43.12                    | -19.27                  | 23.85                      | 40.00           | -16.15       | QP       |         |
| 3   |     | 163.8600     | 41.26                    | -14.11                  | 27.15                      | 43.50           | -16.35       | QP       |         |
| 4   |     | 246.3100     | 40.03                    | -15.19                  | 24.84                      | 46.00           | -21.16       | QP       |         |
| 5   |     | 359.8000     | 36.25                    | -12.08                  | 24.17                      | 46.00           | -21.83       | QP       |         |
| 6   |     | 492.6900     | 37.13                    | -9.36                   | 27.77                      | 46.00           | -18.23       | QP       |         |

|               |                                                                                                     |                     |              |
|---------------|-----------------------------------------------------------------------------------------------------|---------------------|--------------|
| E.U.T :       | HUAWEI MediaPad M2 8.0                                                                              | Model Name :        | M2-802L      |
| Temperature : | 22° C                                                                                               | Relative Humidity : | 55 %         |
| Pressure :    | 1012 hPa                                                                                            | Test Voltage :      | AC 120V/60Hz |
| Test Mode :   | Idle + 2.4G wifi + BT + GPS +<br>earphone + Playing – Adapter: HK /<br>Desktop<br>(HWHKA5E32707819) | Polarization:       | Vertical     |

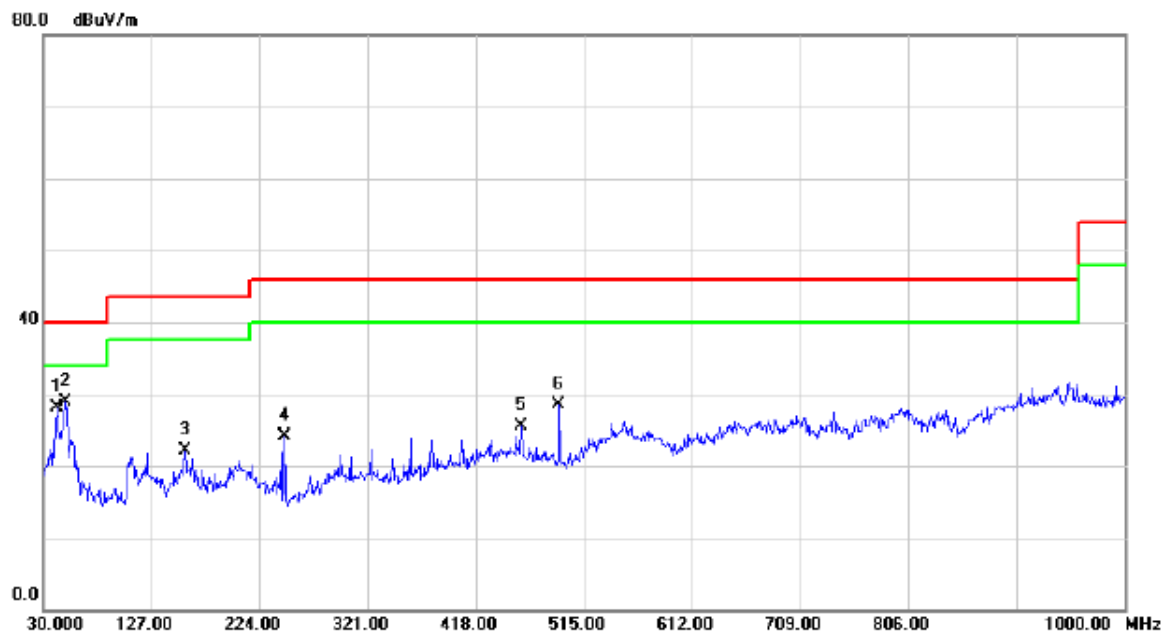


| No. | Mk. | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dB | Measure-<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|-----|--------------|--------------------------|-------------------------|----------------------------|-----------------|--------------|----------|---------|
| 1   |     | 42.6100      | 41.95                    | -13.92                  | 28.03                      | 40.00           | -11.97       | QP       |         |
| 2   | *   | 50.3700      | 42.63                    | -13.73                  | 28.90                      | 40.00           | -11.10       | QP       |         |
| 3   |     | 157.0700     | 35.98                    | -13.96                  | 22.02                      | 43.50           | -21.48       | QP       |         |
| 4   |     | 246.3100     | 39.33                    | -15.19                  | 24.14                      | 46.00           | -21.86       | QP       |         |
| 5   |     | 458.7400     | 35.13                    | -9.61                   | 25.52                      | 46.00           | -20.48       | QP       |         |
| 6   |     | 492.6900     | 37.87                    | -9.36                   | 28.51                      | 46.00           | -17.49       | QP       |         |

|               |                                                                                                 |                     |              |
|---------------|-------------------------------------------------------------------------------------------------|---------------------|--------------|
| E.U.T :       | HUAWEI MediaPad M2 8.0                                                                          | Model Name :        | M2-802L      |
| Temperature : | 22° C                                                                                           | Relative Humidity : | 55 %         |
| Pressure :    | 1012 hPa                                                                                        | Test Voltage :      | AC 120V/60Hz |
| Test Mode :   | Idle + 2.4G wifi + BT + GPS +<br>earphone + Playing – Adapter: HK<br>/ Desktop(HWHKA5E32707819) | Polarization:       | Horizontal   |

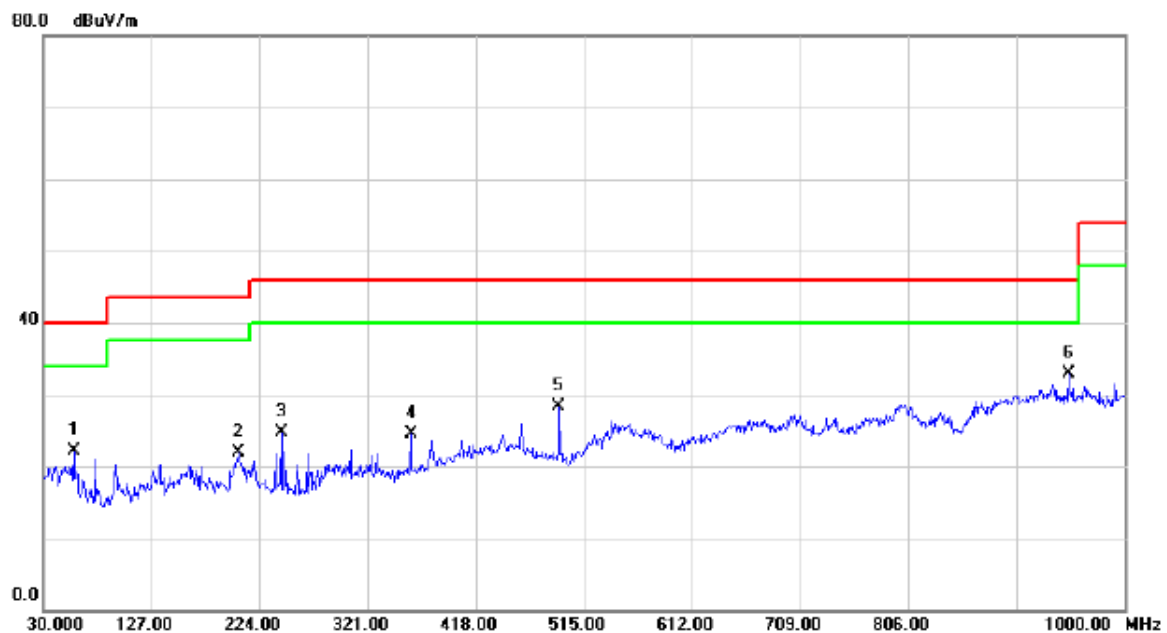


| No. | Mk. | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dB | Measure-<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|-----|--------------|--------------------------|-------------------------|----------------------------|-----------------|--------------|----------|---------|
| 1   |     | 57.1600      | 36.62                    | -14.44                  | 22.18                      | 40.00           | -17.82       | QP       |         |
| 2   |     | 205.5700     | 38.51                    | -16.64                  | 21.87                      | 43.50           | -21.63       | QP       |         |
| 3   |     | 243.4000     | 39.88                    | -15.22                  | 24.66                      | 46.00           | -21.34       | QP       |         |
| 4   |     | 359.8000     | 36.65                    | -12.08                  | 24.57                      | 46.00           | -21.43       | QP       |         |
| 5   |     | 492.6900     | 37.74                    | -9.36                   | 28.38                      | 46.00           | -17.62       | QP       |         |
| 6   | *   | 949.5600     | 34.72                    | -1.77                   | 32.95                      | 46.00           | -13.05       | QP       |         |

|               |                                                  |                     |              |
|---------------|--------------------------------------------------|---------------------|--------------|
| E.U.T :       | HUAWEI MediaPad M2 8.0                           | Model Name :        | M2-802L      |
| Temperature : | 22° C                                            | Relative Humidity : | 55 %         |
| Pressure :    | 1012 hPa                                         | Test Voltage :      | AC 120V/60Hz |
| Test Mode :   | USB R/W + Idle + 2.4G wifi + BT + GPS + earphone | Polarization:       | Vertical     |

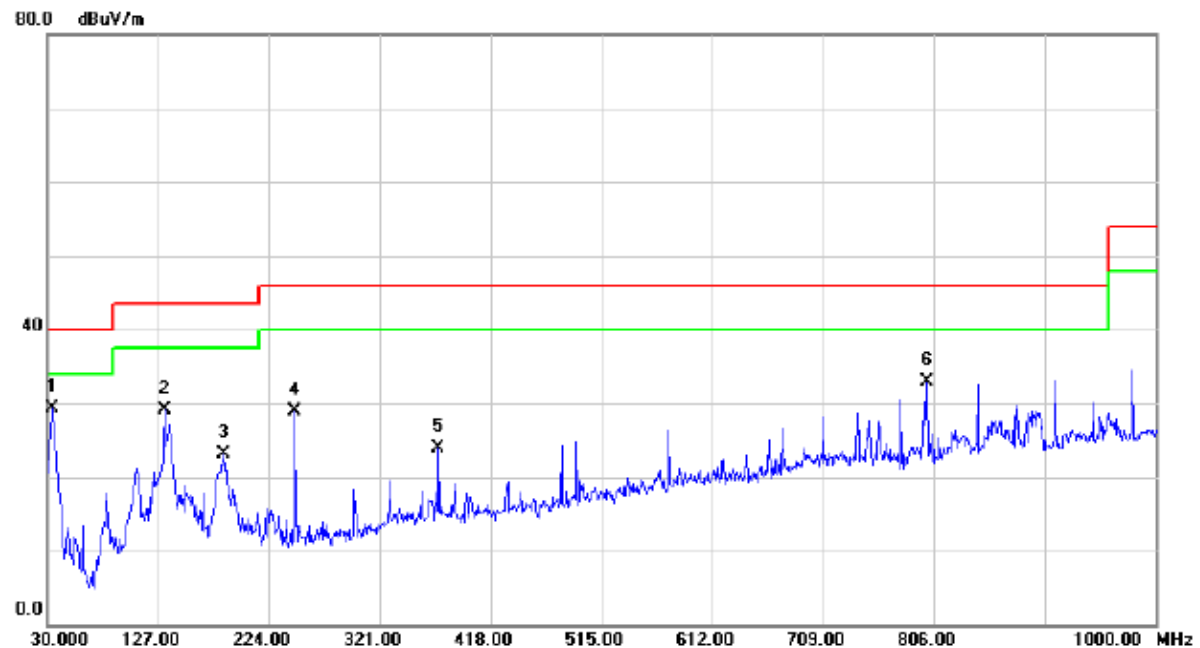


| No. | Mk. | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dB | Measure-<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|-----|--------------|--------------------------|-------------------------|----------------------------|-----------------|--------------|----------|---------|
| 1   | *   | 34.8500      | 44.43                    | -15.15                  | 29.28                      | 40.00           | -10.72       | QP       |         |
| 2   |     | 132.8200     | 44.11                    | -15.05                  | 29.06                      | 43.50           | -14.44       | QP       |         |
| 3   |     | 184.2300     | 39.08                    | -15.96                  | 23.12                      | 43.50           | -20.38       | QP       |         |
| 4   |     | 246.3100     | 44.11                    | -15.19                  | 28.92                      | 46.00           | -17.08       | QP       |         |
| 5   |     | 372.4100     | 35.73                    | -11.79                  | 23.94                      | 46.00           | -22.06       | QP       |         |
| 6   |     | 800.1800     | 37.70                    | -4.74                   | 32.96                      | 46.00           | -13.04       | QP       |         |

|               |                                                  |                     |              |
|---------------|--------------------------------------------------|---------------------|--------------|
| E.U.T :       | HUAWEI MediaPad M2 8.0                           | Model Name :        | M2-802L      |
| Temperature : | 22° C                                            | Relative Humidity : | 55 %         |
| Pressure :    | 1012 hPa                                         | Test Voltage :      | AC 120V/60Hz |
| Test Mode :   | USB R/W + Idle + 2.4G wifi + BT + GPS + earphone | Polarization:       | Horizontal   |

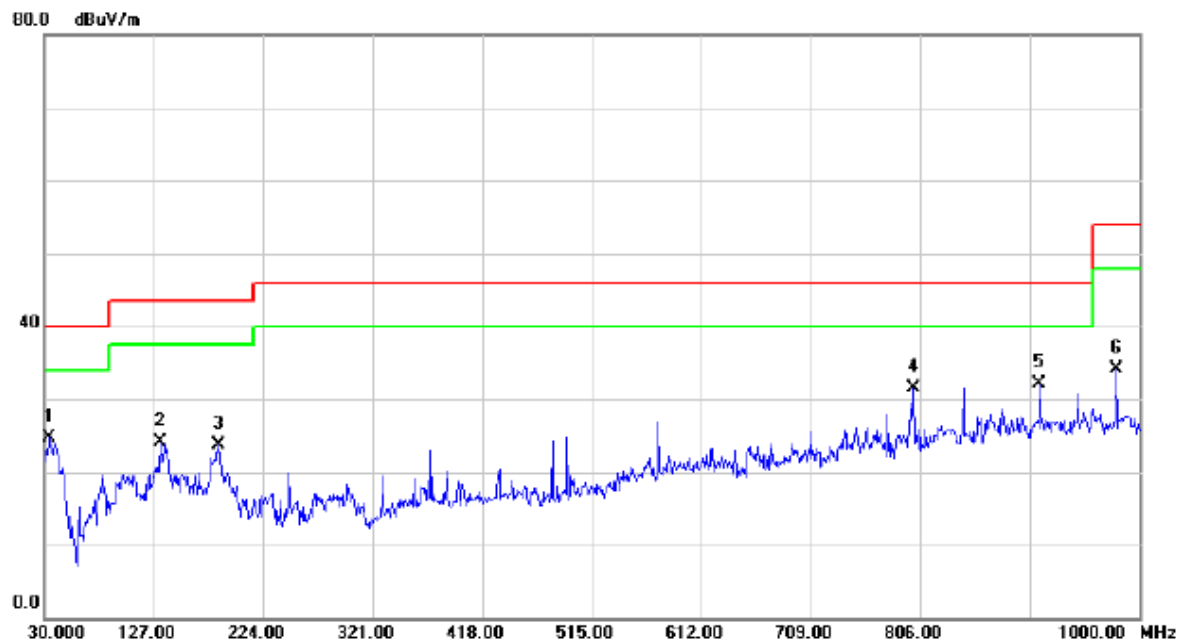


| No. | Mk. | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dB | Measure-<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|-----|--------------|--------------------------|-------------------------|----------------------------|-----------------|--------------|----------|---------|
| 1   |     | 34.8500      | 39.93                    | -15.15                  | 24.78                      | 40.00           | -15.22       | QP       |         |
| 2   |     | 132.8200     | 39.11                    | -15.05                  | 24.06                      | 43.50           | -19.44       | QP       |         |
| 3   |     | 184.2300     | 39.58                    | -15.96                  | 23.62                      | 43.50           | -19.88       | QP       |         |
| 4   |     | 800.1800     | 36.20                    | -4.74                   | 31.46                      | 46.00           | -14.54       | QP       |         |
| 5   | *   | 911.7300     | 34.79                    | -2.59                   | 32.20                      | 46.00           | -13.80       | QP       |         |
| 6   |     | 979.6300     | 35.55                    | -1.47                   | 34.08                      | 54.00           | -19.92       | QP       |         |

|               |                                                                                                     |                     |              |
|---------------|-----------------------------------------------------------------------------------------------------|---------------------|--------------|
| E.U.T :       | HUAWEI MediaPad M2 8.0                                                                              | Model Name :        | M2-802L      |
| Temperature : | 22° C                                                                                               | Relative Humidity : | 55 %         |
| Pressure :    | 1012 hPa                                                                                            | Test Voltage :      | AC 120V/60Hz |
| Test Mode :   | Idle + 2.4G wifi + BT + GPS +<br>earphone + Playing – Adapter: BYD /<br>Desktop<br>(B67432F1E00013) | Polarization:       | Vertical     |

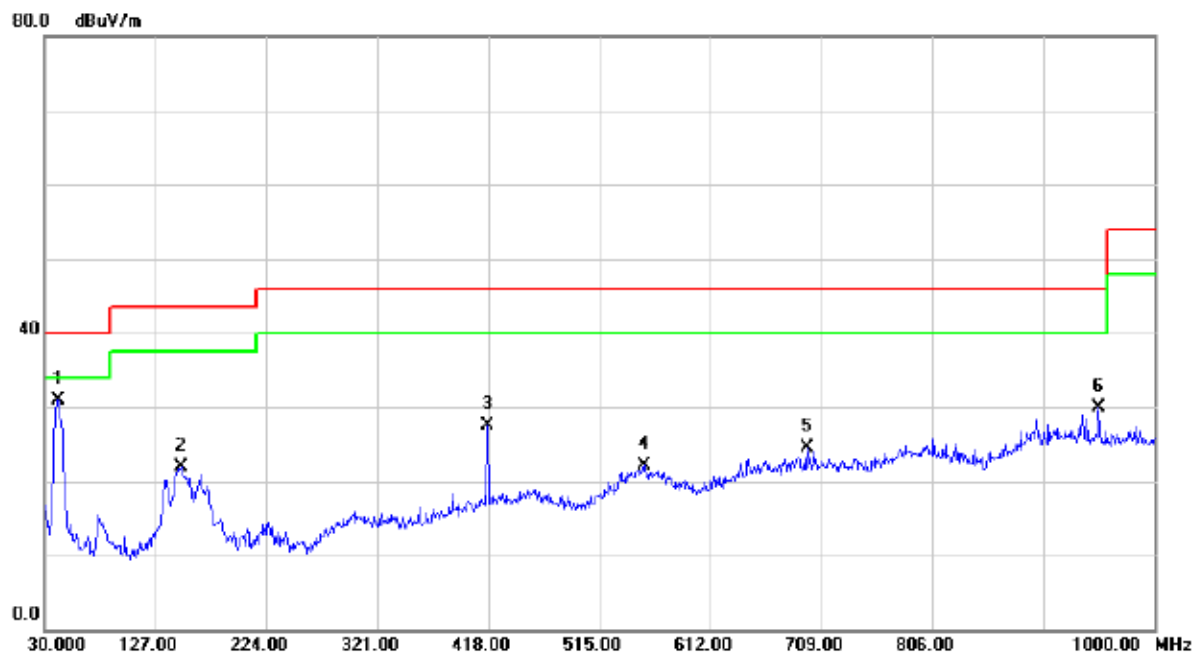


| No. | Mk. | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dB | Measure-<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|-----|--------------|--------------------------|-------------------------|----------------------------|-----------------|--------------|----------|---------|
| 1   | *   | 41.6400      | 44.66                    | -13.72                  | 30.94                      | 40.00           | -9.06        | QP       |         |
| 2   |     | 149.3100     | 35.07                    | -13.08                  | 21.99                      | 43.50           | -21.51       | QP       |         |
| 3   |     | 417.0300     | 36.37                    | -8.89                   | 27.48                      | 46.00           | -18.52       | QP       |         |
| 4   |     | 553.8000     | 27.39                    | -5.35                   | 22.04                      | 46.00           | -23.96       | QP       |         |
| 5   |     | 696.3900     | 28.73                    | -4.26                   | 24.47                      | 46.00           | -21.53       | QP       |         |
| 6   |     | 951.5000     | 30.08                    | -0.20                   | 29.88                      | 46.00           | -16.12       | QP       |         |

|               |                                                                                           |                     |              |
|---------------|-------------------------------------------------------------------------------------------|---------------------|--------------|
| E.U.T :       | HUAWEI MediaPad M2 8.0                                                                    | Model Name :        | M2-802L      |
| Temperature : | 22° C                                                                                     | Relative Humidity : | 55 %         |
| Pressure :    | 1012 hPa                                                                                  | Test Voltage :      | AC 120V/60Hz |
| Test Mode :   | Idle + 2.4G wifi + BT + GPS + earphone + Playing – Adapter: BYD / Desktop(B67432F1E00013) | Polarization:       | Horizontal   |

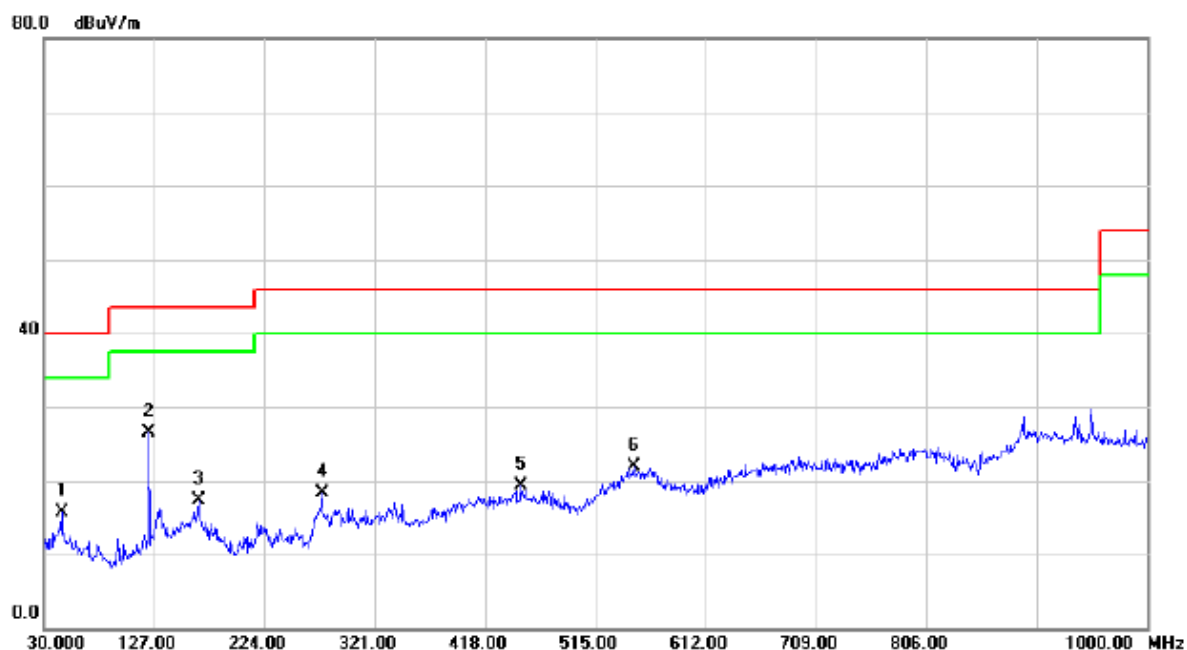


| No. | Mk. | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dB | Measure-<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|-----|--------------|--------------------------|-------------------------|----------------------------|-----------------|--------------|----------|---------|
| 1   |     | 45.5200      | 28.96                    | -13.25                  | 15.71                      | 40.00           | -24.29       | QP       |         |
| 2   | *   | 122.1500     | 40.33                    | -13.81                  | 26.52                      | 43.50           | -16.98       | QP       |         |
| 3   |     | 165.8000     | 29.93                    | -12.68                  | 17.25                      | 43.50           | -26.25       | QP       |         |
| 4   |     | 274.4400     | 31.31                    | -12.98                  | 18.33                      | 46.00           | -27.67       | QP       |         |
| 5   |     | 449.0400     | 27.41                    | -8.08                   | 19.33                      | 46.00           | -26.67       | QP       |         |
| 6   |     | 548.9500     | 27.10                    | -5.24                   | 21.86                      | 46.00           | -24.14       | QP       |         |

|               |                                                                                                    |                     |              |
|---------------|----------------------------------------------------------------------------------------------------|---------------------|--------------|
| E.U.T :       | HUAWEI MediaPad M2 8.0                                                                             | Model Name :        | M2-802L      |
| Temperature : | 22° C                                                                                              | Relative Humidity : | 55 %         |
| Pressure :    | 1012 hPa                                                                                           | Test Voltage :      | AC 120V/60Hz |
| Test Mode :   | Idle + 2.4G wifi + BT + GPS +<br>earphone + Playing – Adapter: HK /<br>Desktop<br>(H67416F6100005) | Polarization:       | Vertical     |

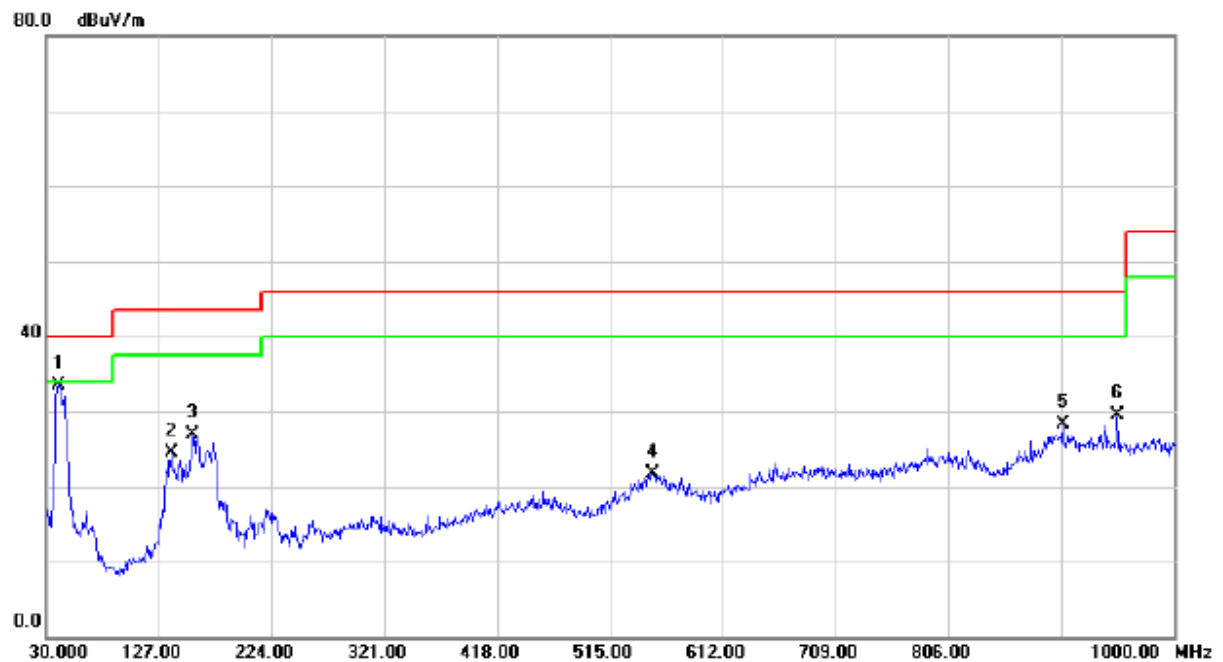


| No. | Mk. | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dB | Measure-<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|-----|--------------|--------------------------|-------------------------|----------------------------|-----------------|--------------|----------|---------|
| 1   | *   | 40.6700      | 47.40                    | -13.87                  | 33.53                      | 40.00           | -6.47        | QP       |         |
| 2   |     | 137.6700     | 38.27                    | -13.85                  | 24.42                      | 43.50           | -19.08       | QP       |         |
| 3   |     | 156.1000     | 39.66                    | -12.66                  | 27.00                      | 43.50           | -16.50       | QP       |         |
| 4   |     | 551.8600     | 26.99                    | -5.25                   | 21.74                      | 46.00           | -24.26       | QP       |         |
| 5   |     | 904.9400     | 27.94                    | 0.39                    | 28.33                      | 46.00           | -17.67       | QP       |         |
| 6   |     | 951.5000     | 29.72                    | -0.20                   | 29.52                      | 46.00           | -16.48       | QP       |         |

|               |                                                                                                |                     |              |
|---------------|------------------------------------------------------------------------------------------------|---------------------|--------------|
| E.U.T :       | HUAWEI MediaPad M2 8.0                                                                         | Model Name :        | M2-802L      |
| Temperature : | 22° C                                                                                          | Relative Humidity : | 55 %         |
| Pressure :    | 1012 hPa                                                                                       | Test Voltage :      | AC 120V/60Hz |
| Test Mode :   | Idle + 2.4G wifi + BT + GPS +<br>earphone + Playing – Adapter: HK<br>/ Desktop(H67416F6100005) | Polarization:       | Horizontal   |

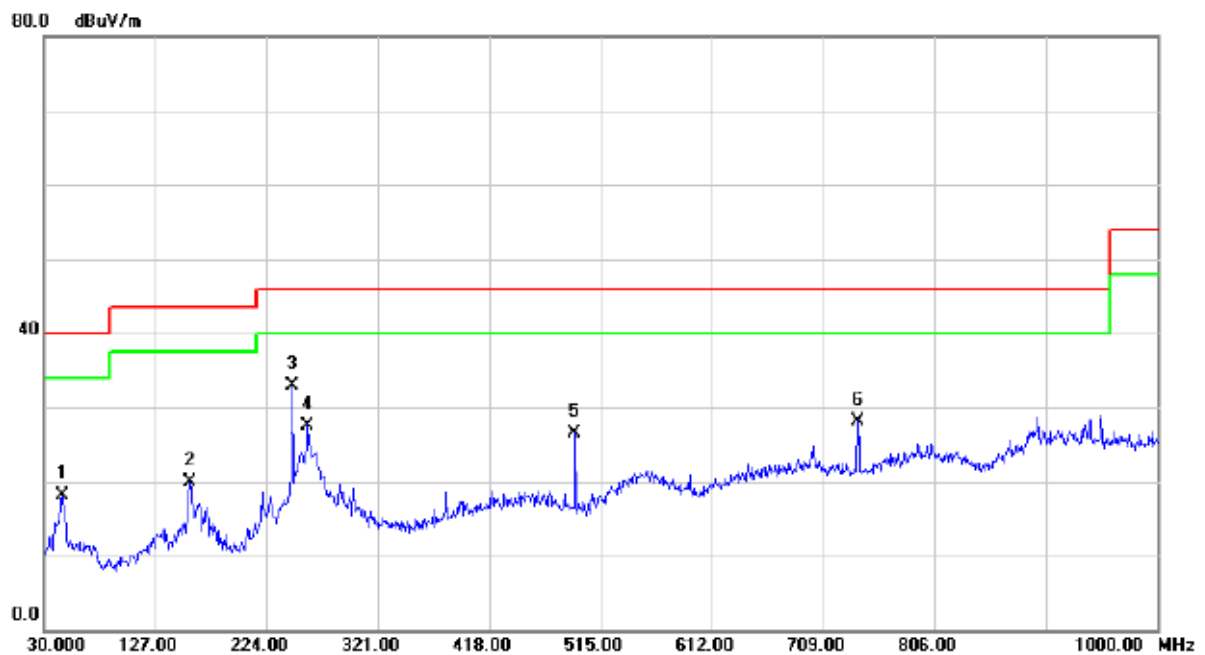


| No. | Mk. | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dB | Measure-<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|-----|--------------|--------------------------|-------------------------|----------------------------|-----------------|--------------|----------|---------|
| 1   |     | 45.5200      | 31.41                    | -13.25                  | 18.16                      | 40.00           | -21.84       | QP       |         |
| 2   |     | 157.0700     | 32.45                    | -12.59                  | 19.86                      | 43.50           | -23.64       | QP       |         |
| 3   | *   | 246.3100     | 47.22                    | -14.24                  | 32.98                      | 46.00           | -13.02       | QP       |         |
| 4   |     | 259.8900     | 41.96                    | -14.36                  | 27.60                      | 46.00           | -18.40       | QP       |         |
| 5   |     | 492.6900     | 36.17                    | -9.70                   | 26.47                      | 46.00           | -19.53       | QP       |         |
| 6   |     | 739.0700     | 32.55                    | -4.51                   | 28.04                      | 46.00           | -17.96       | QP       |         |

|               |                                                                                                    |                     |              |
|---------------|----------------------------------------------------------------------------------------------------|---------------------|--------------|
| E.U.T :       | HUAWEI MediaPad M2 8.0                                                                             | Model Name :        | M2-802L      |
| Temperature : | 22° C                                                                                              | Relative Humidity : | 55 %         |
| Pressure :    | 1012 hPa                                                                                           | Test Voltage :      | AC 120V/60Hz |
| Test Mode :   | Idle + 2.4G wifi + BT + GPS +<br>earphone + Playing – Adapter:<br>PHITEK / Desktop(P67401F5W00017) | Polarization:       | Vertical     |

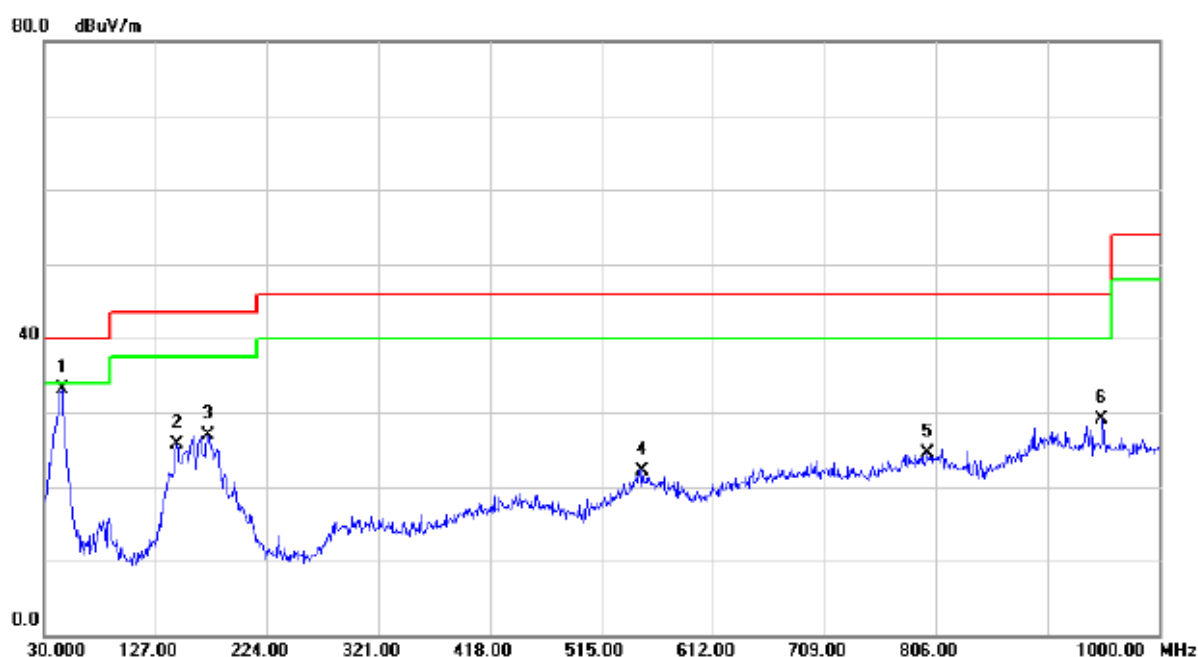


| No. | Mk. | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dB | Measure-<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|-----|--------------|--------------------------|-------------------------|----------------------------|-----------------|--------------|----------|---------|
| 1   | *   | 45.5200      | 46.37                    | -13.25                  | 33.12                      | 40.00           | -6.88        | QP       |         |
| 2   |     | 145.4300     | 39.27                    | -13.50                  | 25.77                      | 43.50           | -17.73       | QP       |         |
| 3   |     | 172.5900     | 39.78                    | -12.90                  | 26.88                      | 43.50           | -16.62       | QP       |         |
| 4   |     | 550.8900     | 27.39                    | -5.19                   | 22.20                      | 46.00           | -23.80       | QP       |         |
| 5   |     | 798.2400     | 26.74                    | -2.16                   | 24.58                      | 46.00           | -21.42       | QP       |         |
| 6   |     | 950.5300     | 29.22                    | -0.19                   | 29.03                      | 46.00           | -16.97       | QP       |         |

|               |                                                                                                       |                     |              |
|---------------|-------------------------------------------------------------------------------------------------------|---------------------|--------------|
| E.U.T :       | HUAWEI MediaPad M2 8.0                                                                                | Model Name :        | M2-802L      |
| Temperature : | 22° C                                                                                                 | Relative Humidity : | 55 %         |
| Pressure :    | 1012 hPa                                                                                              | Test Voltage :      | AC 120V/60Hz |
| Test Mode :   | Idle + 2.4G wifi + BT + GPS +<br>earphone + Playing – Adapter:<br>PHITEK /<br>Desktop(P67401F5W00017) | Polarization:       | Horizontal   |

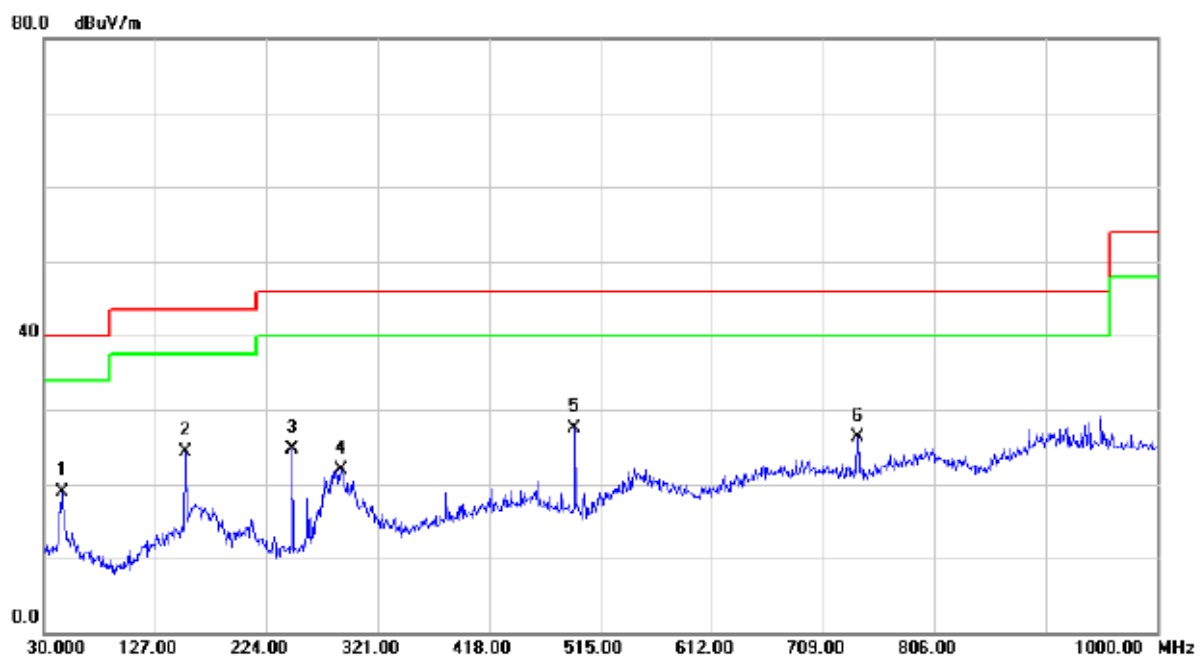


| No. | Mk. | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dB | Measure-<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|-----|--------------|--------------------------|-------------------------|----------------------------|-----------------|--------------|----------|---------|
| 1   |     | 45.5200      | 32.21                    | -13.25                  | 18.96                      | 40.00           | -21.04       | QP       |         |
| 2   |     | 153.1900     | 37.04                    | -12.82                  | 24.22                      | 43.50           | -19.28       | QP       |         |
| 3   |     | 246.3100     | 39.04                    | -14.24                  | 24.80                      | 46.00           | -21.20       | QP       |         |
| 4   |     | 288.9900     | 33.10                    | -11.13                  | 21.97                      | 46.00           | -24.03       | QP       |         |
| 5   | *   | 492.6900     | 37.27                    | -9.70                   | 27.57                      | 46.00           | -18.43       | QP       |         |
| 6   |     | 739.0700     | 30.87                    | -4.51                   | 26.36                      | 46.00           | -19.64       | QP       |         |

|               |                                                                                                       |                     |              |
|---------------|-------------------------------------------------------------------------------------------------------|---------------------|--------------|
| E.U.T :       | HUAWEI MediaPad M2 8.0                                                                                | Model Name :        | M2-802L      |
| Temperature : | 22° C                                                                                                 | Relative Humidity : | 55 %         |
| Pressure :    | 1012 hPa                                                                                              | Test Voltage :      | AC 120V/60Hz |
| Test Mode :   | Idle + 2.4G wifi + BT + GPS +<br>earphone + Playing – Adapter: YINJU /<br>Desktop<br>(Y67401F3G00038) | Polarization:       | Vertical     |

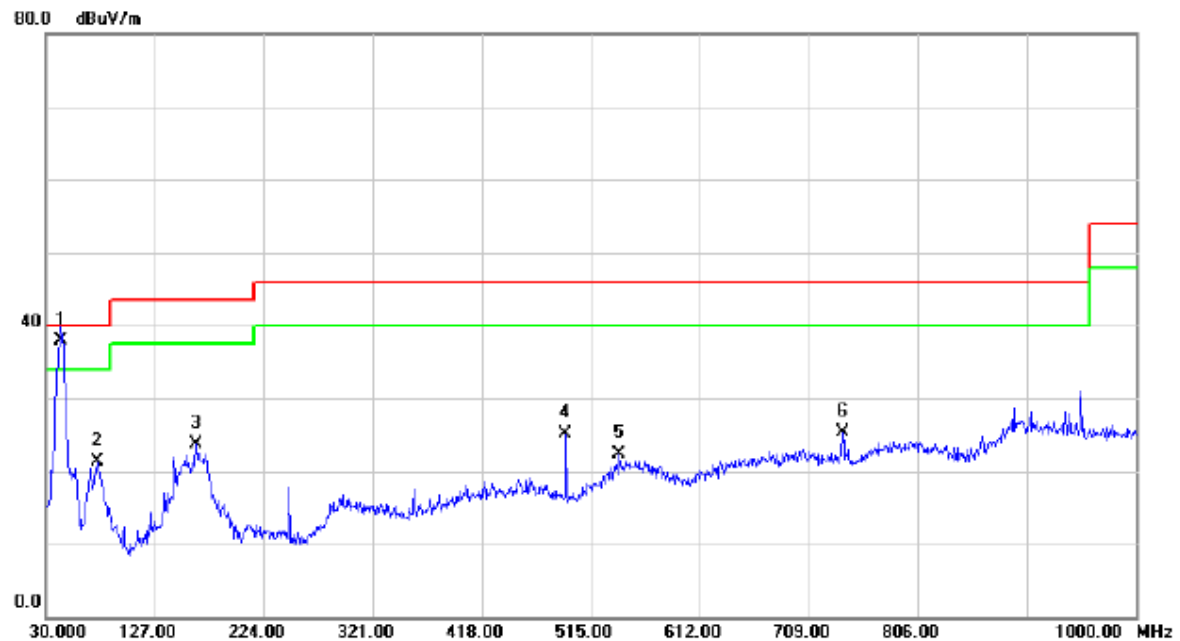

| No. | Mk. | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dB | Measure-<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|-----|--------------|--------------------------|-------------------------|----------------------------|-----------------|--------------|----------|---------|
| 1   | *   | 43.5800      | 51.50                    | -13.53                  | 37.97                      | 40.00           | -2.03        | QP       |         |
| 2   |     | 75.5900      | 37.66                    | -16.31                  | 21.35                      | 40.00           | -18.65       | QP       |         |
| 3   |     | 163.8600     | 36.23                    | -12.60                  | 23.63                      | 43.50           | -19.87       | QP       |         |
| 4   |     | 492.6900     | 34.88                    | -9.70                   | 25.18                      | 46.00           | -20.82       | QP       |         |
| 5   |     | 540.2200     | 28.34                    | -6.09                   | 22.25                      | 46.00           | -23.75       | QP       |         |
| 6   |     | 739.0700     | 29.82                    | -4.51                   | 25.31                      | 46.00           | -20.69       | QP       |         |

|               |                                                                                          |                     |              |
|---------------|------------------------------------------------------------------------------------------|---------------------|--------------|
| E.U.T :       | HUAWEI MediaPad M2 8.0                                                                   | Model Name :        | M2-802L      |
| Temperature : | 22° C                                                                                    | Relative Humidity : | 55 %         |
| Pressure :    | 1012 hPa                                                                                 | Test Voltage :      | AC 120V/60Hz |
| Test Mode :   | Idle + 2.4G wifi + BT + GPS + earphone + Playing – Adapter: HK / Desktop(Y67401F3G00038) | Polarization:       | Horizontal   |

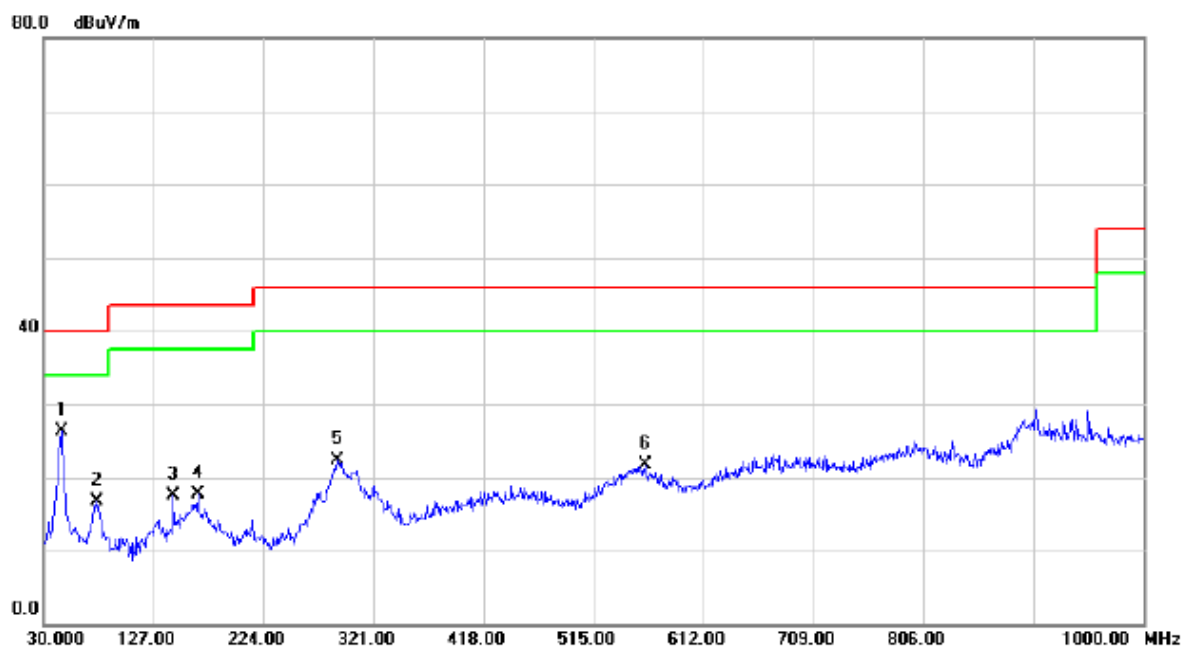


| No. | Mk. | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dB | Measure-<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|-----|--------------|--------------------------|-------------------------|----------------------------|-----------------|--------------|----------|---------|
| 1   | *   | 45.5200      | 39.56                    | -13.25                  | 26.31                      | 40.00           | -13.69       | QP       |         |
| 2   |     | 76.5600      | 33.08                    | -16.40                  | 16.68                      | 40.00           | -23.32       | QP       |         |
| 3   |     | 144.4600     | 31.17                    | -13.60                  | 17.57                      | 43.50           | -25.93       | QP       |         |
| 4   |     | 165.8000     | 30.41                    | -12.68                  | 17.73                      | 43.50           | -25.77       | QP       |         |
| 5   |     | 288.9900     | 33.47                    | -11.13                  | 22.34                      | 46.00           | -23.66       | QP       |         |
| 6   |     | 560.5900     | 27.32                    | -5.71                   | 21.61                      | 46.00           | -24.39       | QP       |         |

#### **4.2.8 TEST RESULTS- ABOVE 1000MHZ**

Remark:


- (1) Reading in which marked as Peak or AVG means measurements by using are Peak Mode or AVG with Detector BW=1MHz; SPA setting in RBW=1MHz, VBW =1MHz, Swp. Time = 0.3 sec./MHz, AVG Mode with detector BW=1MHz; SPA setting in RBW=1MHz, VBW =10Hz, Swp. Time = 0.3 sec./MHz.
- (2) All readings are Peak unless otherwise stated QP in column of 『Note』. Peak denotes that the Peak reading Compliance with the QP Limits and then QP Mode measurement didn't perform.
- (3) Measuring frequency range from 1GHz to 40GHz.
- (4) For testing above 1GHz, the emissions level of the EUT in peak mode was lower than average limit (that means the emissions level in peak mode also Complies with the limit in average mode), then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.

|               |                                                                                                       |                     |              |
|---------------|-------------------------------------------------------------------------------------------------------|---------------------|--------------|
| E.U.T :       | HUAWEI MediaPad M2 8.0                                                                                | Model Name :        | M2-802L      |
| Temperature : | 22° C                                                                                                 | Relative Humidity : | 55 %         |
| Pressure :    | 1012 hPa                                                                                              | Test Voltage :      | AC 120V/60Hz |
| Test Mode :   | Idle + 2.4G wifi + BT + GPS +<br>earphone + Playing<br>– Adapter: BYD / Desktop<br>(HWBYA32DC1600019) | Polarization:       | Vertical     |

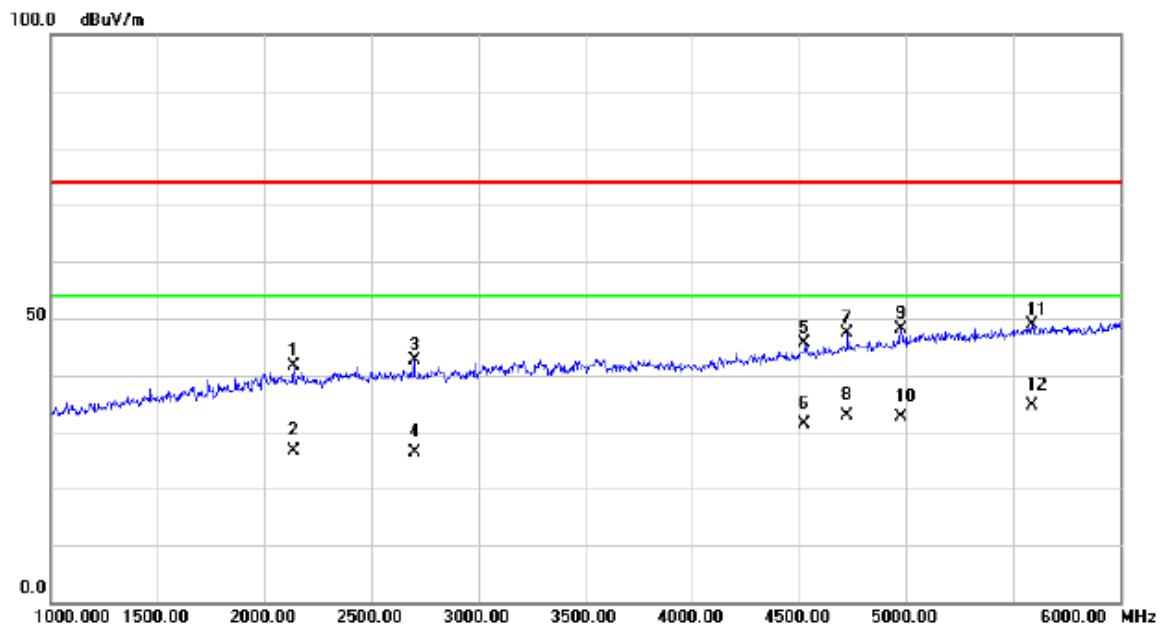


| No. | Mk. | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dB | Measure-<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|-----|--------------|--------------------------|-------------------------|----------------------------|-----------------|--------------|----------|---------|
| 1   |     | 2135.000     | 41.89                    | -0.19                   | 41.70                      | 74.00           | -32.30       | peak     |         |
| 2   |     | 2135.000     | 26.85                    | -0.19                   | 26.66                      | 54.00           | -27.34       | AVG      |         |
| 3   |     | 2700.000     | 41.89                    | 0.67                    | 42.56                      | 74.00           | -31.44       | peak     |         |
| 4   |     | 2700.000     | 25.78                    | 0.67                    | 26.45                      | 54.00           | -27.55       | AVG      |         |
| 5   |     | 4525.000     | 38.71                    | 6.81                    | 45.52                      | 74.00           | -28.48       | peak     |         |
| 6   |     | 4525.000     | 24.62                    | 6.81                    | 31.43                      | 54.00           | -22.57       | AVG      |         |
| 7   |     | 4725.000     | 39.92                    | 7.38                    | 47.30                      | 74.00           | -26.70       | peak     |         |
| 8   |     | 4725.000     | 25.48                    | 7.38                    | 32.86                      | 54.00           | -21.14       | AVG      |         |
| 9   |     | 4975.000     | 39.93                    | 8.08                    | 48.01                      | 74.00           | -25.99       | peak     |         |
| 10  |     | 4975.000     | 24.66                    | 8.08                    | 32.74                      | 54.00           | -21.26       | AVG      |         |
| 11  |     | 5590.000     | 39.42                    | 9.35                    | 48.77                      | 74.00           | -25.23       | peak     |         |
| 12  | *   | 5590.000     | 25.40                    | 9.35                    | 34.75                      | 54.00           | -19.25       | AVG      |         |

|               |                                                                                                       |                     |              |
|---------------|-------------------------------------------------------------------------------------------------------|---------------------|--------------|
| E.U.T :       | HUAWEI MediaPad M2 8.0                                                                                | Model Name :        | M2-802L      |
| Temperature : | 22° C                                                                                                 | Relative Humidity : | 55 %         |
| Pressure :    | 1012 hPa                                                                                              | Test Voltage :      | AC 120V/60Hz |
| Test Mode :   | Idle + 2.4G wifi + BT + GPS +<br>earphone + Playing<br>– Adapter: BYD / Desktop<br>(HWBYA32DC1600019) | Polarization:       | Horizontal   |

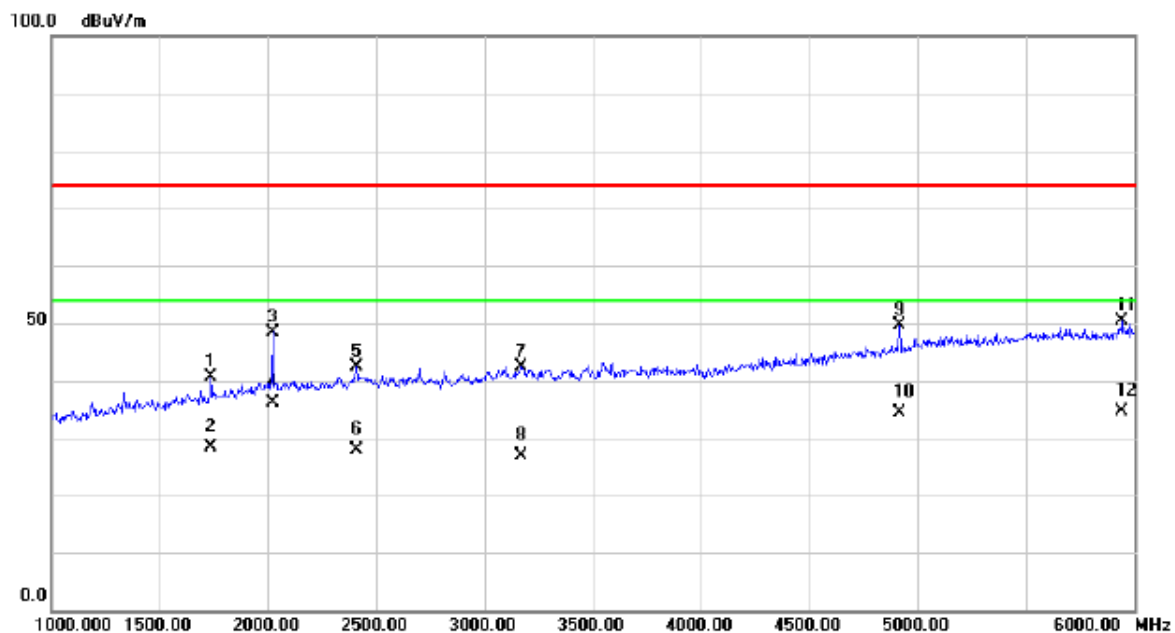


| No. | Mk. | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dB | Measure-<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|-----|--------------|--------------------------|-------------------------|----------------------------|-----------------|--------------|----------|---------|
| 1   |     | 1735.000     | 42.96                    | -2.21                   | 40.75                      | 74.00           | -33.25       | peak     |         |
| 2   |     | 1735.000     | 30.62                    | -2.21                   | 28.41                      | 54.00           | -25.59       | AVG      |         |
| 3   |     | 2020.000     | 48.83                    | -0.33                   | 48.50                      | 74.00           | -25.50       | peak     |         |
| 4   | *   | 2020.000     | 36.54                    | -0.33                   | 36.21                      | 54.00           | -17.79       | AVG      |         |
| 5   |     | 2410.000     | 42.33                    | 0.17                    | 42.50                      | 74.00           | -31.50       | peak     |         |
| 6   |     | 2410.000     | 27.65                    | 0.17                    | 27.82                      | 54.00           | -26.18       | AVG      |         |
| 7   |     | 3170.000     | 40.58                    | 1.86                    | 42.44                      | 74.00           | -31.56       | peak     |         |
| 8   |     | 3170.000     | 25.14                    | 1.86                    | 27.00                      | 54.00           | -27.00       | AVG      |         |
| 9   |     | 4915.000     | 41.75                    | 7.92                    | 49.67                      | 74.00           | -24.33       | peak     |         |
| 10  |     | 4915.000     | 26.42                    | 7.92                    | 34.34                      | 54.00           | -19.66       | AVG      |         |
| 11  |     | 5945.000     | 40.35                    | 9.92                    | 50.27                      | 74.00           | -23.73       | peak     |         |
| 12  |     | 5945.000     | 24.67                    | 9.92                    | 34.59                      | 54.00           | -19.41       | AVG      |         |

|               |                                                                                                           |                     |              |
|---------------|-----------------------------------------------------------------------------------------------------------|---------------------|--------------|
| E.U.T :       | HUAWEI MediaPad M2 8.0                                                                                    | Model Name :        | M2-802L      |
| Temperature : | 22° C                                                                                                     | Relative Humidity : | 55 %         |
| Pressure :    | 1012 hPa                                                                                                  | Test Voltage :      | AC 120V/60Hz |
| Test Mode :   | Idle + 2.4G wifi + BT + GPS +<br>earphone + Playing<br>– Adapter: BYD / Set upright<br>(HWBYA32DC1600019) | Polarization:       | Vertical     |

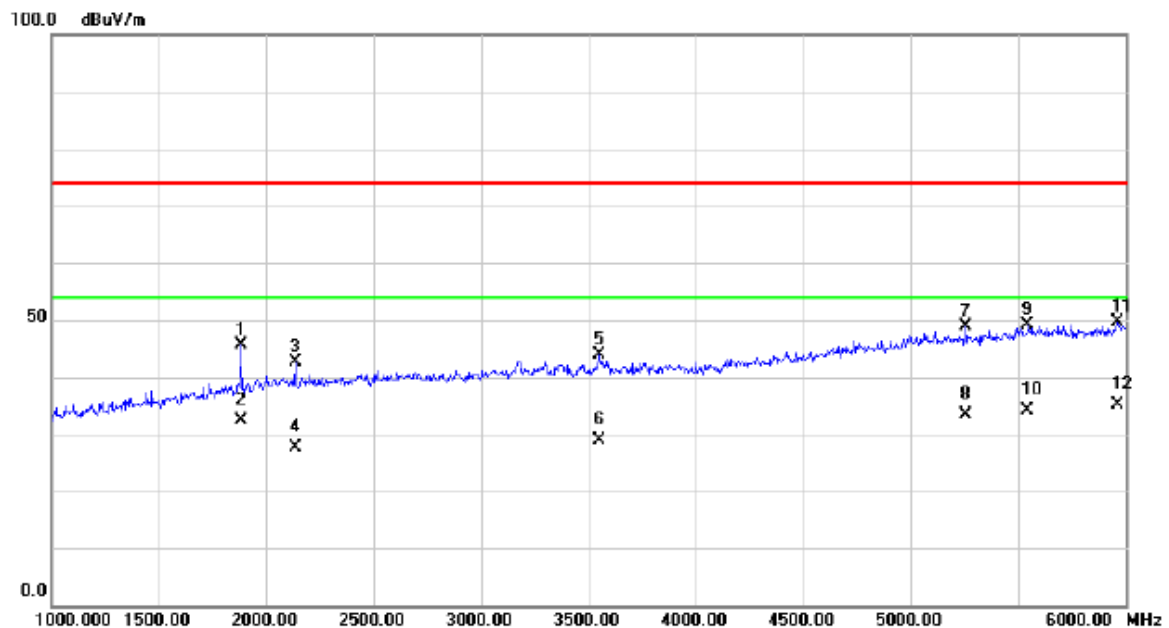


| No. Mk. | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dB | Measure-<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|---------|--------------|--------------------------|-------------------------|----------------------------|-----------------|--------------|----------|---------|
| 1       | 1880.000     | 46.79                    | -1.20                   | 45.59                      | 74.00           | -28.41       | peak     |         |
| 2       | 1880.000     | 33.52                    | -1.20                   | 32.32                      | 54.00           | -21.68       | AVG      |         |
| 3       | 2135.000     | 42.70                    | -0.19                   | 42.51                      | 74.00           | -31.49       | peak     |         |
| 4       | 2135.000     | 27.88                    | -0.19                   | 27.69                      | 54.00           | -26.31       | AVG      |         |
| 5       | 3550.000     | 40.61                    | 3.25                    | 43.86                      | 74.00           | -30.14       | peak     |         |
| 6       | 3550.000     | 25.63                    | 3.25                    | 28.88                      | 54.00           | -25.12       | AVG      |         |
| 7       | 5255.000     | 40.08                    | 8.68                    | 48.76                      | 74.00           | -25.24       | peak     |         |
| 8       | 5255.000     | 24.78                    | 8.68                    | 33.46                      | 54.00           | -20.54       | AVG      |         |
| 9       | 5545.000     | 39.95                    | 9.28                    | 49.23                      | 74.00           | -24.77       | peak     |         |
| 10      | 5545.000     | 24.84                    | 9.28                    | 34.12                      | 54.00           | -19.88       | AVG      |         |
| 11      | 5960.000     | 39.56                    | 9.95                    | 49.51                      | 74.00           | -24.49       | peak     |         |
| 12 *    | 5960.000     | 25.13                    | 9.95                    | 35.08                      | 54.00           | -18.92       | AVG      |         |

|               |                                                                                                           |                     |              |
|---------------|-----------------------------------------------------------------------------------------------------------|---------------------|--------------|
| E.U.T :       | HUAWEI MediaPad M2 8.0                                                                                    | Model Name :        | M2-802L      |
| Temperature : | 22° C                                                                                                     | Relative Humidity : | 55 %         |
| Pressure :    | 1012 hPa                                                                                                  | Test Voltage :      | AC 120V/60Hz |
| Test Mode :   | Idle + 2.4G wifi + BT + GPS +<br>earphone + Playing<br>– Adapter: BYD / Set upright<br>(HWBYA32DC1600019) | Polarization:       | Horizontal   |

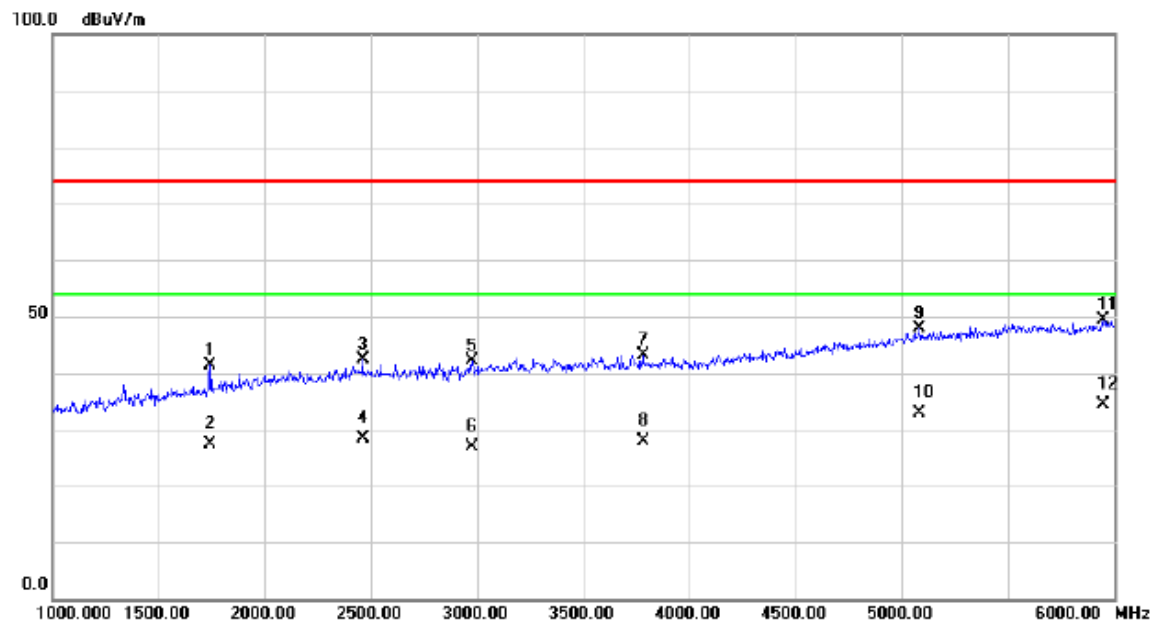


| No. | Mk. | Freq.    | Reading Level | Correct Factor | Measurement | Limit  | Margin |          |         |
|-----|-----|----------|---------------|----------------|-------------|--------|--------|----------|---------|
|     |     | MHz      | dBuV          | dB             | dBuV/m      | dBuV/m | dB     | Detector | Comment |
| 1   |     | 1745.000 | 43.60         | -2.15          | 41.45       | 74.00  | -32.55 | peak     |         |
| 2   |     | 1745.000 | 29.41         | -2.15          | 27.26       | 54.00  | -26.74 | AVG      |         |
| 3   |     | 2460.000 | 42.26         | 0.23           | 42.49       | 74.00  | -31.51 | peak     |         |
| 4   |     | 2460.000 | 28.12         | 0.23           | 28.35       | 54.00  | -25.65 | AVG      |         |
| 5   |     | 2975.000 | 40.99         | 1.21           | 42.20       | 74.00  | -31.80 | peak     |         |
| 6   |     | 2975.000 | 25.64         | 1.21           | 26.85       | 54.00  | -27.15 | AVG      |         |
| 7   |     | 3780.000 | 38.84         | 4.35           | 43.19       | 74.00  | -30.81 | peak     |         |
| 8   |     | 3780.000 | 23.47         | 4.35           | 27.82       | 54.00  | -26.18 | AVG      |         |
| 9   |     | 5085.000 | 39.48         | 8.32           | 47.80       | 74.00  | -26.20 | peak     |         |
| 10  |     | 5085.000 | 24.62         | 8.32           | 32.94       | 54.00  | -21.06 | AVG      |         |
| 11  |     | 5950.000 | 39.55         | 9.93           | 49.48       | 74.00  | -24.52 | peak     |         |
| 12  | *   | 5950.000 | 24.51         | 9.93           | 34.44       | 54.00  | -19.56 | AVG      |         |

|               |                                                                                                            |                     |              |
|---------------|------------------------------------------------------------------------------------------------------------|---------------------|--------------|
| E.U.T :       | HUAWEI MediaPad M2 8.0                                                                                     | Model Name :        | M2-802L      |
| Temperature : | 22° C                                                                                                      | Relative Humidity : | 55 %         |
| Pressure :    | 1012 hPa                                                                                                   | Test Voltage :      | AC 120V/60Hz |
| Test Mode :   | Traffic + 2.4G wifi + BT + GPS +<br>earphone + Camera on<br>– Adapter: BYD / Desktop<br>(HWBYA32DC1600019) | Polarization:       | Vertical     |

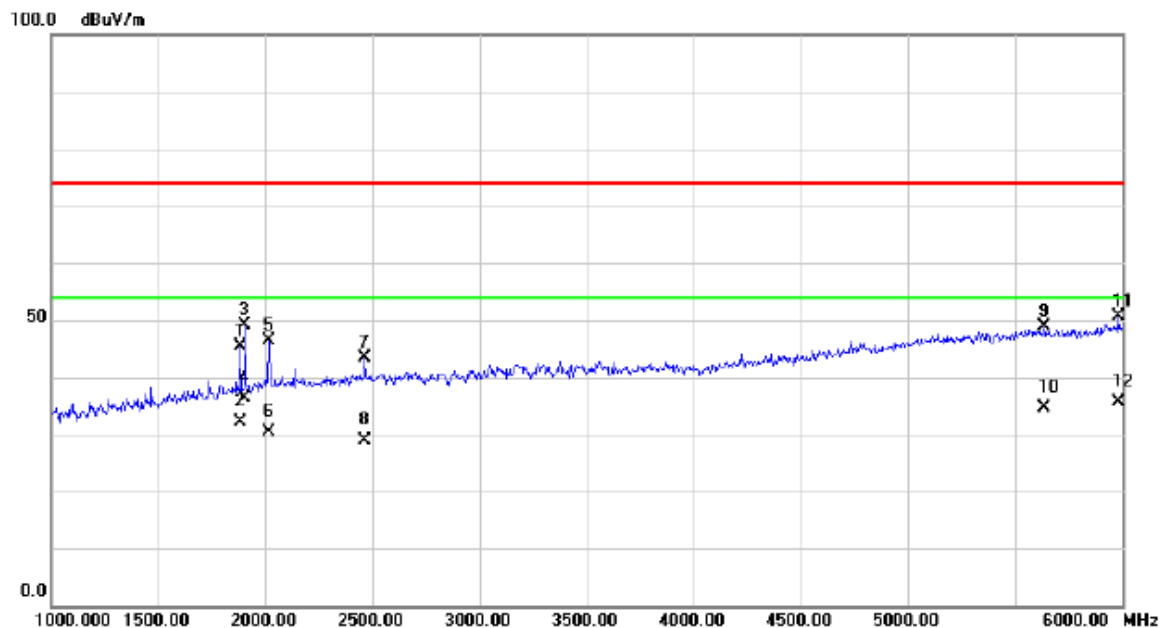


| No. | Mk. | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dB | Measure-<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|-----|--------------|--------------------------|-------------------------|----------------------------|-----------------|--------------|----------|---------|
| 1   |     | 1880.000     | 46.65                    | -1.20                   | 45.45                      | 74.00           | -28.55       | peak     |         |
| 2   |     | 1880.000     | 33.35                    | -1.20                   | 32.15                      | 54.00           | -21.85       | AVG      |         |
| 3   |     | 1905.000     | 50.19                    | -1.02                   | 49.17                      | 74.00           | -24.83       | peak     |         |
| 4   | *   | 1905.000     | 37.41                    | -1.02                   | 36.39                      | 54.00           | -17.61       | AVG      |         |
| 5   |     | 2015.000     | 46.78                    | -0.34                   | 46.44                      | 74.00           | -27.56       | peak     |         |
| 6   |     | 2015.000     | 30.65                    | -0.34                   | 30.31                      | 54.00           | -23.69       | AVG      |         |
| 7   |     | 2460.000     | 43.18                    | 0.23                    | 43.41                      | 74.00           | -30.59       | peak     |         |
| 8   |     | 2460.000     | 28.67                    | 0.23                    | 28.90                      | 54.00           | -25.10       | AVG      |         |
| 9   |     | 5635.000     | 39.48                    | 9.42                    | 48.90                      | 74.00           | -25.10       | peak     |         |
| 10  |     | 5635.000     | 25.14                    | 9.42                    | 34.56                      | 54.00           | -19.44       | AVG      |         |
| 11  |     | 5985.000     | 40.70                    | 9.99                    | 50.69                      | 74.00           | -23.31       | peak     |         |
| 12  |     | 5985.000     | 25.69                    | 9.99                    | 35.68                      | 54.00           | -18.32       | AVG      |         |

|               |                                                                                                            |                     |              |
|---------------|------------------------------------------------------------------------------------------------------------|---------------------|--------------|
| E.U.T :       | HUAWEI MediaPad M2 8.0                                                                                     | Model Name :        | M2-802L      |
| Temperature : | 22° C                                                                                                      | Relative Humidity : | 55 %         |
| Pressure :    | 1012 hPa                                                                                                   | Test Voltage :      | AC 120V/60Hz |
| Test Mode :   | Traffic + 2.4G wifi + BT + GPS +<br>earphone + Camera on<br>– Adapter: BYD / Desktop<br>(HWBYA32DC1600019) | Polarization:       | Horizontal   |

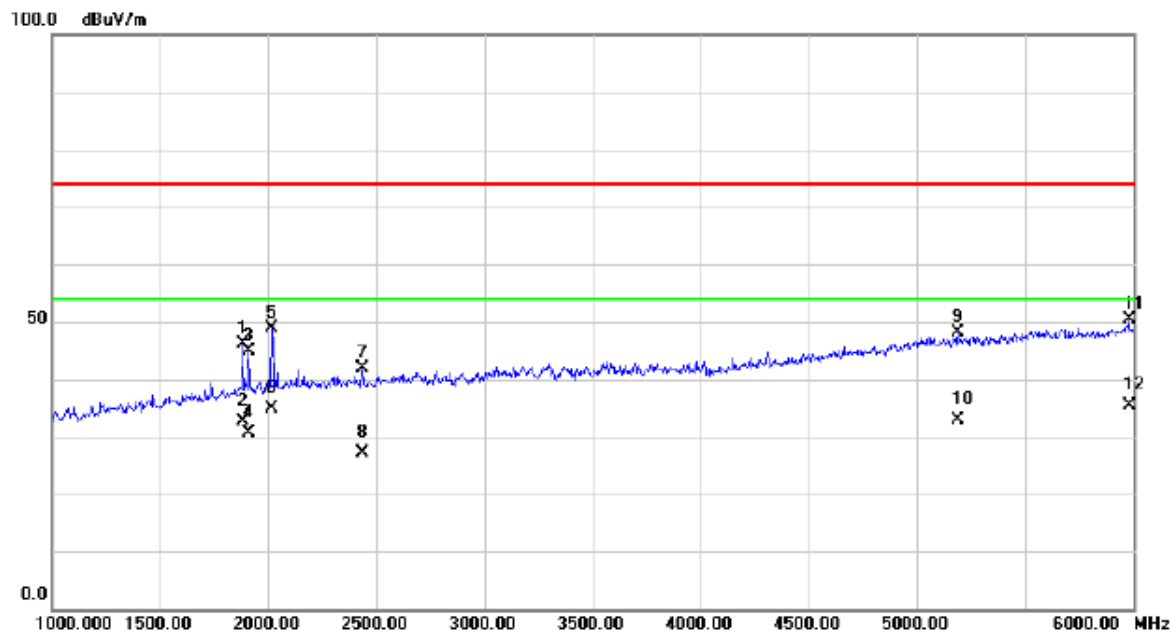


| No. | Mk. | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dB | Measure-<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|-----|--------------|--------------------------|-------------------------|----------------------------|-----------------|--------------|----------|---------|
| 1   |     | 1880.000     | 47.23                    | -1.20                   | 46.03                      | 74.00           | -27.97       | peak     |         |
| 2   |     | 1880.000     | 33.85                    | -1.20                   | 32.65                      | 54.00           | -21.35       | AVG      |         |
| 3   |     | 1910.000     | 45.94                    | -0.99                   | 44.95                      | 74.00           | -29.05       | peak     |         |
| 4   |     | 1910.000     | 31.52                    | -0.99                   | 30.53                      | 54.00           | -23.47       | AVG      |         |
| 5   |     | 2015.000     | 49.17                    | -0.34                   | 48.83                      | 74.00           | -25.17       | peak     |         |
| 6   |     | 2015.000     | 35.10                    | -0.34                   | 34.76                      | 54.00           | -19.24       | AVG      |         |
| 7   |     | 2435.000     | 41.58                    | 0.20                    | 41.78                      | 74.00           | -32.22       | peak     |         |
| 8   |     | 2435.000     | 26.84                    | 0.20                    | 27.04                      | 54.00           | -26.96       | AVG      |         |
| 9   |     | 5190.000     | 39.55                    | 8.56                    | 48.11                      | 74.00           | -25.89       | peak     |         |
| 10  |     | 5190.000     | 24.31                    | 8.56                    | 32.87                      | 54.00           | -21.13       | AVG      |         |
| 11  |     | 5980.000     | 40.32                    | 9.98                    | 50.30                      | 74.00           | -23.70       | peak     |         |
| 12  | *   | 5980.000     | 25.41                    | 9.98                    | 35.39                      | 54.00           | -18.61       | AVG      |         |

|               |                                                                                                           |                     |              |
|---------------|-----------------------------------------------------------------------------------------------------------|---------------------|--------------|
| E.U.T :       | HUAWEI MediaPad M2 8.0                                                                                    | Model Name :        | M2-802L      |
| Temperature : | 22° C                                                                                                     | Relative Humidity : | 55 %         |
| Pressure :    | 1012 hPa                                                                                                  | Test Voltage :      | AC 120V/60Hz |
| Test Mode :   | Traffic + 2.4G wifi + BT + GPS +<br>Speaker + Camera on<br>– Adapter: BYD / Desktop<br>(HWBYA32DC1600019) | Polarization:       | Vertical     |

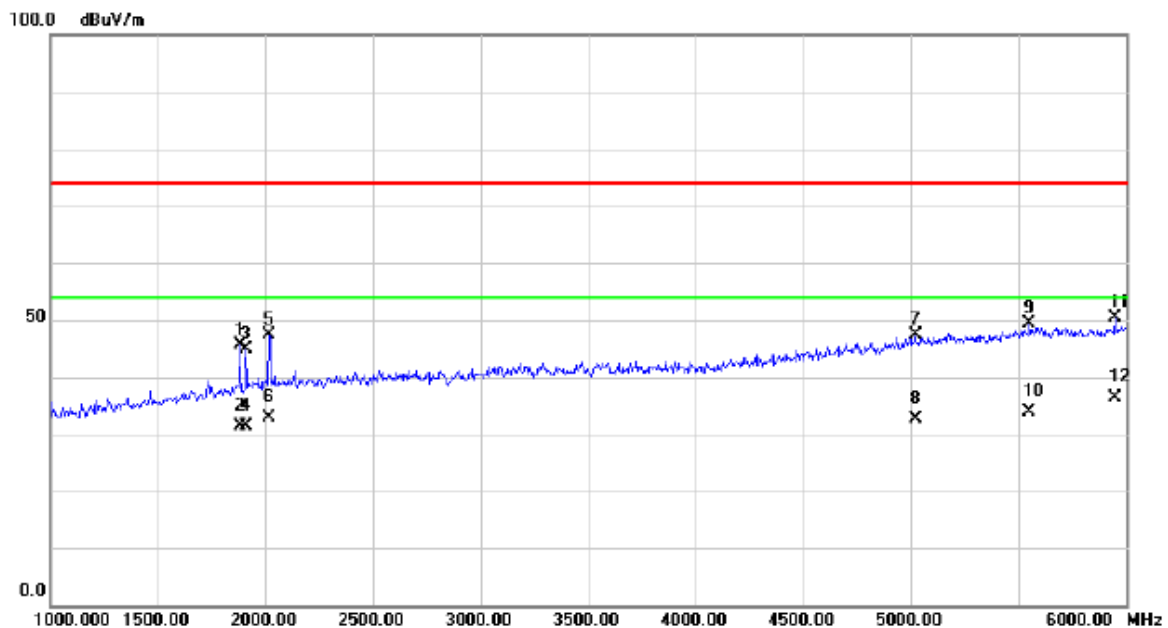


| No. | Mk. | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dB | Measure-<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|-----|--------------|--------------------------|-------------------------|----------------------------|-----------------|--------------|----------|---------|
| 1   |     | 1880.000     | 46.77                    | -1.20                   | 45.57                      | 74.00           | -28.43       | peak     |         |
| 2   |     | 1880.000     | 32.56                    | -1.20                   | 31.36                      | 54.00           | -22.64       | AVG      |         |
| 3   |     | 1910.000     | 45.98                    | -0.99                   | 44.99                      | 74.00           | -29.01       | peak     |         |
| 4   |     | 1910.000     | 32.43                    | -0.99                   | 31.44                      | 54.00           | -22.56       | AVG      |         |
| 5   |     | 2015.000     | 47.63                    | -0.34                   | 47.29                      | 74.00           | -26.71       | peak     |         |
| 6   |     | 2015.000     | 33.26                    | -0.34                   | 32.92                      | 54.00           | -21.08       | AVG      |         |
| 7   |     | 5020.000     | 39.07                    | 8.19                    | 47.26                      | 74.00           | -26.74       | peak     |         |
| 8   |     | 5020.000     | 24.32                    | 8.19                    | 32.51                      | 54.00           | -21.49       | AVG      |         |
| 9   |     | 5550.000     | 40.06                    | 9.29                    | 49.35                      | 74.00           | -24.65       | peak     |         |
| 10  |     | 5550.000     | 24.65                    | 9.29                    | 33.94                      | 54.00           | -20.06       | AVG      |         |
| 11  |     | 5950.000     | 40.42                    | 9.93                    | 50.35                      | 74.00           | -23.65       | peak     |         |
| 12  | *   | 5950.000     | 26.43                    | 9.93                    | 36.36                      | 54.00           | -17.64       | AVG      |         |

|               |                                                                                                           |                     |              |
|---------------|-----------------------------------------------------------------------------------------------------------|---------------------|--------------|
| E.U.T :       | HUAWEI MediaPad M2 8.0                                                                                    | Model Name :        | M2-802L      |
| Temperature : | 22° C                                                                                                     | Relative Humidity : | 55 %         |
| Pressure :    | 1012 hPa                                                                                                  | Test Voltage :      | AC 120V/60Hz |
| Test Mode :   | Traffic + 2.4G wifi + BT + GPS +<br>Speaker + Camera on<br>– Adapter: BYD / Desktop<br>(HWBYA32DC1600019) | Polarization:       | Horizontal   |

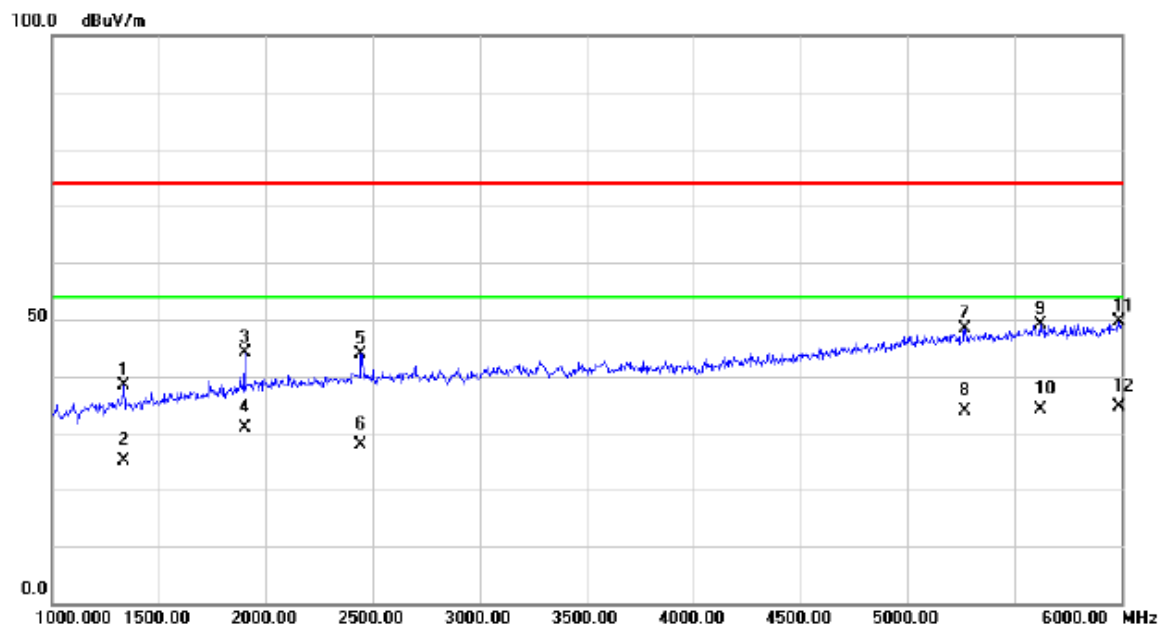


| No. | Mk. | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dB | Measure-<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|-----|--------------|--------------------------|-------------------------|----------------------------|-----------------|--------------|----------|---------|
| 1   |     | 1335.000     | 43.31                    | -5.00                   | 38.31                      | 74.00           | -35.69       | peak     |         |
| 2   |     | 1335.000     | 30.24                    | -5.00                   | 25.24                      | 54.00           | -28.76       | AVG      |         |
| 3   |     | 1900.000     | 45.07                    | -1.06                   | 44.01                      | 74.00           | -29.99       | peak     |         |
| 4   |     | 1900.000     | 31.97                    | -1.06                   | 30.91                      | 54.00           | -23.09       | AVG      |         |
| 5   |     | 2445.000     | 43.72                    | 0.21                    | 43.93                      | 74.00           | -30.07       | peak     |         |
| 6   |     | 2445.000     | 27.65                    | 0.21                    | 27.86                      | 54.00           | -26.14       | AVG      |         |
| 7   |     | 5270.000     | 39.65                    | 8.72                    | 48.37                      | 74.00           | -25.63       | peak     |         |
| 8   |     | 5270.000     | 25.14                    | 8.72                    | 33.86                      | 54.00           | -20.14       | AVG      |         |
| 9   |     | 5620.000     | 39.64                    | 9.40                    | 49.04                      | 74.00           | -24.96       | peak     |         |
| 10  |     | 5620.000     | 24.75                    | 9.40                    | 34.15                      | 54.00           | -19.85       | AVG      |         |
| 11  |     | 5990.000     | 39.69                    | 9.99                    | 49.68                      | 74.00           | -24.32       | peak     |         |
| 12  | *   | 5990.000     | 24.62                    | 9.99                    | 34.61                      | 54.00           | -19.39       | AVG      |         |

|               |                                                                                                          |                     |              |
|---------------|----------------------------------------------------------------------------------------------------------|---------------------|--------------|
| E.U.T :       | HUAWEI MediaPad M2 8.0                                                                                   | Model Name :        | M2-802L      |
| Temperature : | 22° C                                                                                                    | Relative Humidity : | 55 %         |
| Pressure :    | 1012 hPa                                                                                                 | Test Voltage :      | AC 120V/60Hz |
| Test Mode :   | Traffic + 2.4G wifi + BT + GPS +<br>earphone + Camera on<br>– Adapter: HK / Desktop<br>(HWHKA5E32707819) | Polarization:       | Vertical     |

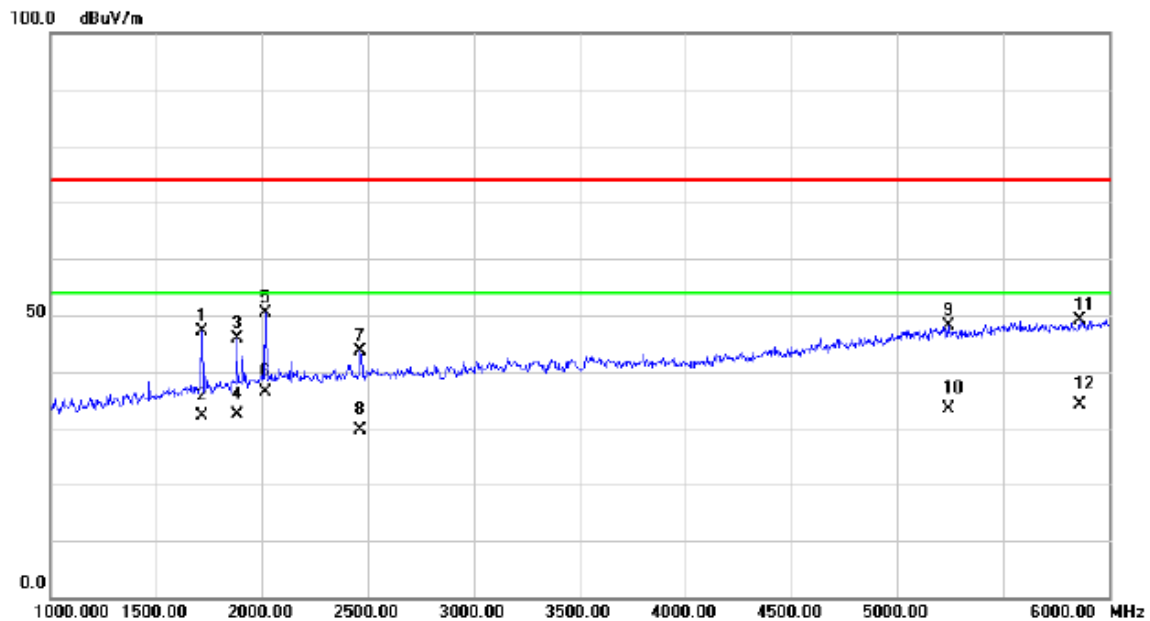


| No. | Mk. | Freq.    | Reading Level | Correct Factor | Measurement | Limit  | Margin |          |         |
|-----|-----|----------|---------------|----------------|-------------|--------|--------|----------|---------|
|     |     | MHz      | dBuV          | dB             | dBuV/m      | dBuV/m | dB     | Detector | Comment |
| 1   |     | 1715.000 | 49.52         | -2.36          | 47.16       | 74.00  | -26.84 | peak     |         |
| 2   |     | 1715.000 | 34.52         | -2.36          | 32.16       | 54.00  | -21.84 | AVG      |         |
| 3   |     | 1880.000 | 47.11         | -1.20          | 45.91       | 74.00  | -28.09 | peak     |         |
| 4   |     | 1880.000 | 33.68         | -1.20          | 32.48       | 54.00  | -21.52 | AVG      |         |
| 5   |     | 2015.000 | 50.61         | -0.34          | 50.27       | 74.00  | -23.73 | peak     |         |
| 6   | *   | 2015.000 | 36.77         | -0.34          | 36.43       | 54.00  | -17.57 | AVG      |         |
| 7   |     | 2465.000 | 43.34         | 0.23           | 43.57       | 74.00  | -30.43 | peak     |         |
| 8   |     | 2465.000 | 29.34         | 0.23           | 29.57       | 54.00  | -24.43 | AVG      |         |
| 9   |     | 5240.000 | 39.43         | 8.66           | 48.09       | 74.00  | -25.91 | peak     |         |
| 10  |     | 5240.000 | 24.62         | 8.66           | 33.28       | 54.00  | -20.72 | AVG      |         |
| 11  |     | 5860.000 | 39.45         | 9.79           | 49.24       | 74.00  | -24.76 | peak     |         |
| 12  |     | 5860.000 | 24.23         | 9.79           | 34.02       | 54.00  | -19.98 | AVG      |         |

|               |                                                                                                          |                     |              |
|---------------|----------------------------------------------------------------------------------------------------------|---------------------|--------------|
| E.U.T :       | HUAWEI MediaPad M2 8.0                                                                                   | Model Name :        | M2-802L      |
| Temperature : | 22° C                                                                                                    | Relative Humidity : | 55 %         |
| Pressure :    | 1012 hPa                                                                                                 | Test Voltage :      | AC 120V/60Hz |
| Test Mode :   | Traffic + 2.4G wifi + BT + GPS +<br>earphone + Camera on<br>– Adapter: HK / Desktop<br>(HWHKA5E32707819) | Polarization:       | Horizontal   |

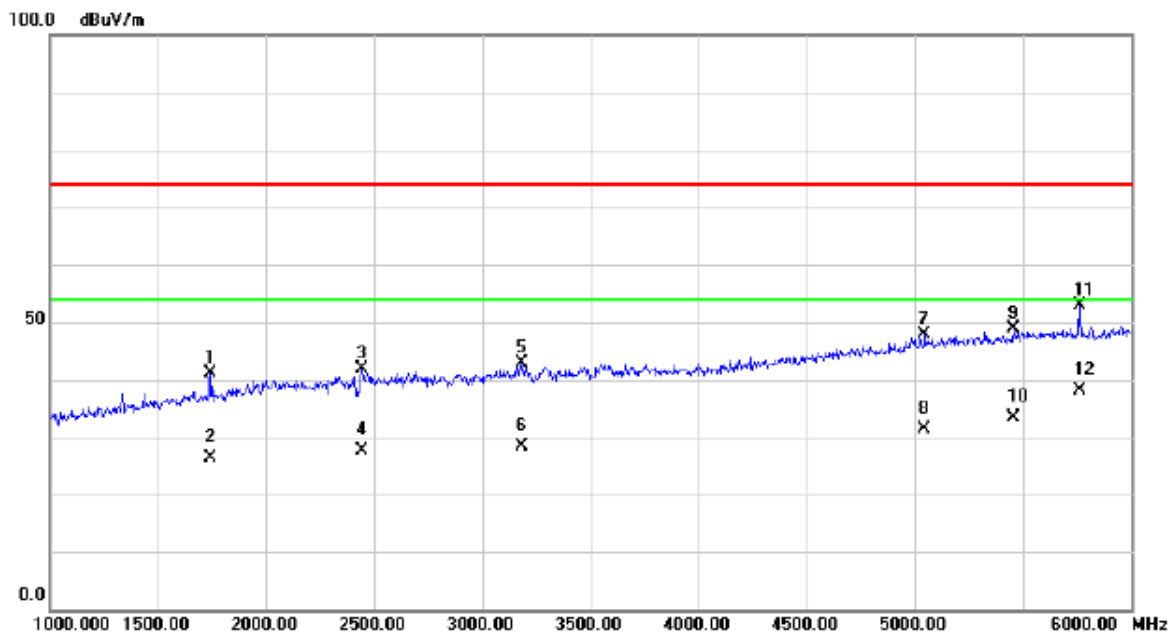


| No. | Mk. | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dB | Measure-<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|-----|--------------|--------------------------|-------------------------|----------------------------|-----------------|--------------|----------|---------|
| 1   |     | 1745.000     | 43.27                    | -2.15                   | 41.12                      | 74.00           | -32.88       | peak     |         |
| 2   |     | 1745.000     | 28.42                    | -2.15                   | 26.27                      | 54.00           | -27.73       | AVG      |         |
| 3   |     | 2445.000     | 41.67                    | 0.21                    | 41.88                      | 74.00           | -32.12       | peak     |         |
| 4   |     | 2445.000     | 27.35                    | 0.21                    | 27.56                      | 54.00           | -26.44       | AVG      |         |
| 5   |     | 3185.000     | 41.04                    | 1.90                    | 42.94                      | 74.00           | -31.06       | peak     |         |
| 6   |     | 3185.000     | 26.58                    | 1.90                    | 28.48                      | 54.00           | -25.52       | AVG      |         |
| 7   |     | 5045.000     | 39.61                    | 8.24                    | 47.85                      | 74.00           | -26.15       | peak     |         |
| 8   |     | 5045.000     | 23.14                    | 8.24                    | 31.38                      | 54.00           | -22.62       | AVG      |         |
| 9   |     | 5455.000     | 39.85                    | 9.11                    | 48.96                      | 74.00           | -25.04       | peak     |         |
| 10  |     | 5455.000     | 24.26                    | 9.11                    | 33.37                      | 54.00           | -20.63       | AVG      |         |
| 11  |     | 5760.000     | 43.26                    | 9.63                    | 52.89                      | 74.00           | -21.11       | peak     |         |
| 12  | *   | 5760.000     | 28.61                    | 9.63                    | 38.24                      | 54.00           | -15.76       | AVG      |         |

|               |                                                  |                     |              |
|---------------|--------------------------------------------------|---------------------|--------------|
| E.U.T :       | HUAWEI MediaPad M2 8.0                           | Model Name :        | M2-802L      |
| Temperature : | 22° C                                            | Relative Humidity : | 55 %         |
| Pressure :    | 1012 hPa                                         | Test Voltage :      | AC 120V/60Hz |
| Test Mode :   | USB R/W + Idle + 2.4G wifi + BT + GPS + earphone | Polarization:       | Vertical     |

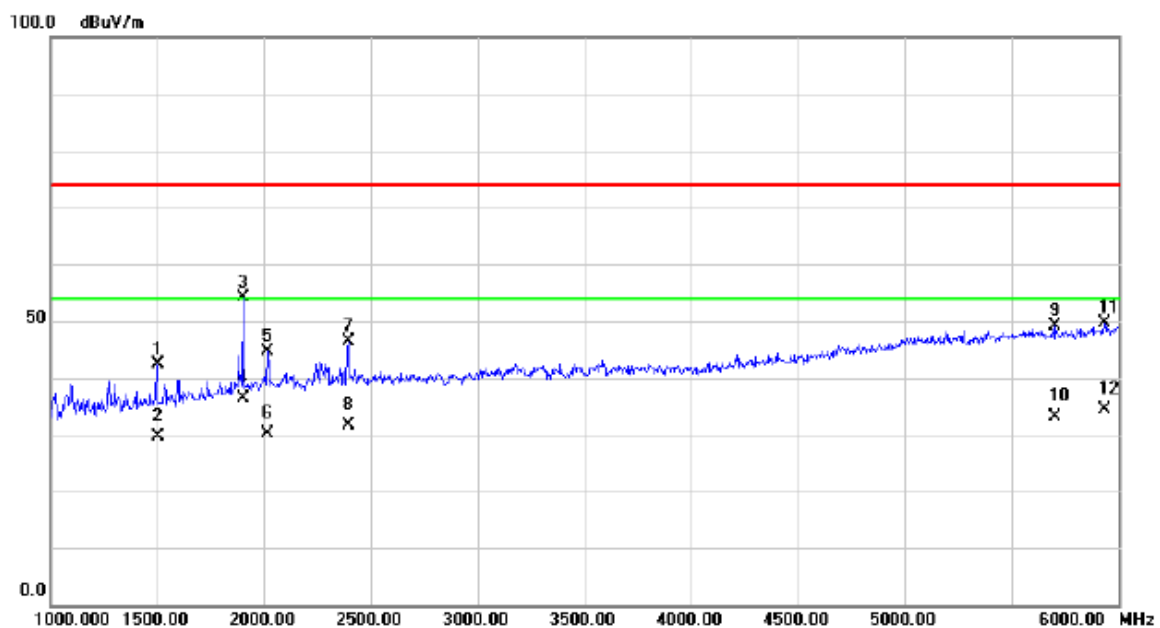


| No. | Mk. | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dB | Measure-<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|-----|--------------|--------------------------|-------------------------|----------------------------|-----------------|--------------|----------|---------|
| 1   |     | 1500.000     | 46.30                    | -3.86                   | 42.44                      | 74.00           | -31.56       | peak     |         |
| 2   |     | 1500.000     | 33.54                    | -3.86                   | 29.68                      | 54.00           | -24.32       | AVG      |         |
| 3   |     | 1900.000     | 55.28                    | -1.06                   | 54.22                      | 74.00           | -19.78       | peak     |         |
| 4   | *   | 1900.000     | 37.56                    | -1.06                   | 36.50                      | 54.00           | -17.50       | AVG      |         |
| 5   |     | 2015.000     | 44.94                    | -0.34                   | 44.60                      | 74.00           | -29.40       | peak     |         |
| 6   |     | 2015.000     | 30.56                    | -0.34                   | 30.22                      | 54.00           | -23.78       | AVG      |         |
| 7   |     | 2395.000     | 46.24                    | 0.15                    | 46.39                      | 74.00           | -27.61       | peak     |         |
| 8   |     | 2395.000     | 31.52                    | 0.15                    | 31.67                      | 54.00           | -22.33       | AVG      |         |
| 9   |     | 5705.000     | 39.53                    | 9.54                    | 49.07                      | 74.00           | -24.93       | peak     |         |
| 10  |     | 5705.000     | 23.67                    | 9.54                    | 33.21                      | 54.00           | -20.79       | AVG      |         |
| 11  |     | 5935.000     | 39.60                    | 9.91                    | 49.51                      | 74.00           | -24.49       | peak     |         |
| 12  |     | 5935.000     | 24.55                    | 9.91                    | 34.46                      | 54.00           | -19.54       | AVG      |         |

|               |                                                  |                     |              |
|---------------|--------------------------------------------------|---------------------|--------------|
| E.U.T :       | HUAWEI MediaPad M2 8.0                           | Model Name :        | M2-802L      |
| Temperature : | 22° C                                            | Relative Humidity : | 55 %         |
| Pressure :    | 1012 hPa                                         | Test Voltage :      | AC 120V/60Hz |
| Test Mode :   | USB R/W + Idle + 2.4G wifi + BT + GPS + earphone | Polarization:       | Horizontal   |

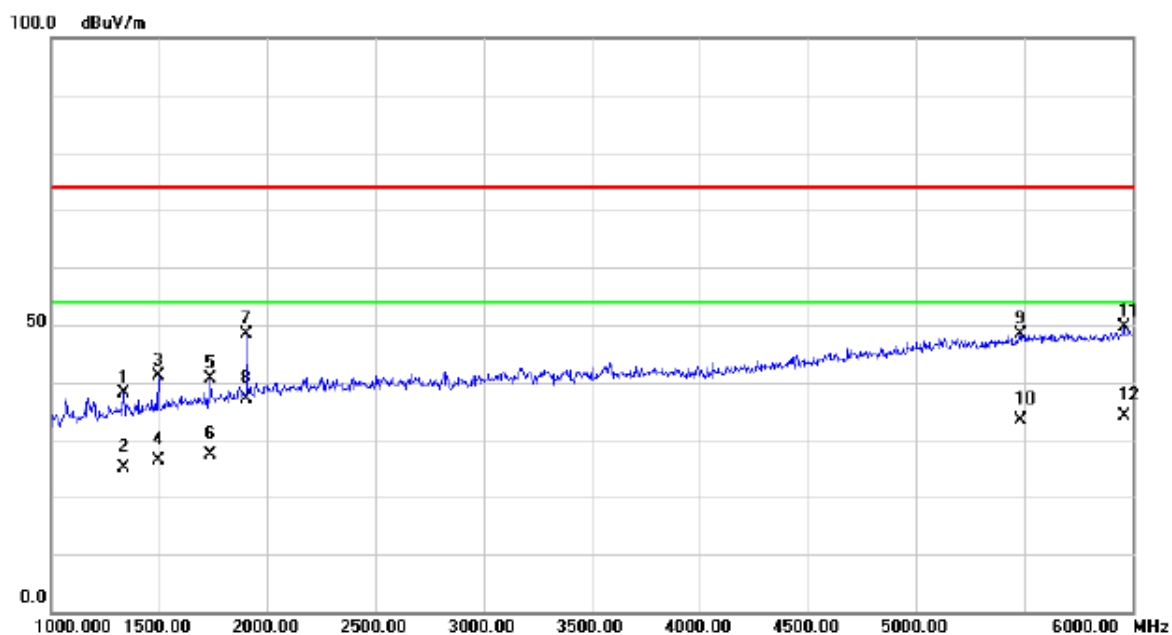


| No. Mk. | Freq.    | Reading Level | Correct Factor | Measurement | Limit  | Margin |          |         |
|---------|----------|---------------|----------------|-------------|--------|--------|----------|---------|
|         | MHz      | dBuV          | dB             | dBuV/m      | dBuV/m | dB     | Detector | Comment |
| 1       | 1335.000 | 43.07         | -5.00          | 38.07       | 74.00  | -35.93 | peak     |         |
| 2       | 1335.000 | 30.10         | -5.00          | 25.10       | 54.00  | -28.90 | AVG      |         |
| 3       | 1495.000 | 44.96         | -3.89          | 41.07       | 74.00  | -32.93 | peak     |         |
| 4       | 1495.000 | 30.26         | -3.89          | 26.37       | 54.00  | -27.63 | AVG      |         |
| 5       | 1735.000 | 42.91         | -2.21          | 40.70       | 74.00  | -33.30 | peak     |         |
| 6       | 1735.000 | 29.53         | -2.21          | 27.32       | 54.00  | -26.68 | AVG      |         |
| 7       | 1905.000 | 49.48         | -1.02          | 48.46       | 74.00  | -25.54 | peak     |         |
| 8 *     | 1905.000 | 38.12         | -1.02          | 37.10       | 54.00  | -16.90 | AVG      |         |
| 9       | 5480.000 | 39.19         | 9.16           | 48.35       | 74.00  | -25.65 | peak     |         |
| 10      | 5480.000 | 24.32         | 9.16           | 33.48       | 54.00  | -20.52 | AVG      |         |
| 11      | 5960.000 | 39.60         | 9.95           | 49.55       | 74.00  | -24.45 | peak     |         |
| 12      | 5960.000 | 24.13         | 9.95           | 34.08       | 54.00  | -19.92 | AVG      |         |

|               |                                                                                                          |                     |              |
|---------------|----------------------------------------------------------------------------------------------------------|---------------------|--------------|
| E.U.T :       | HUAWEI MediaPad M2 8.0                                                                                   | Model Name :        | M2-802L      |
| Temperature : | 22° C                                                                                                    | Relative Humidity : | 55 %         |
| Pressure :    | 1012 hPa                                                                                                 | Test Voltage :      | AC 120V/60Hz |
| Test Mode :   | Traffic + 2.4G wifi + BT + GPS +<br>earphone + Camera on<br>– Adapter: BYD / Desktop<br>(B67432F1E00013) | Polarization:       | Vertical     |

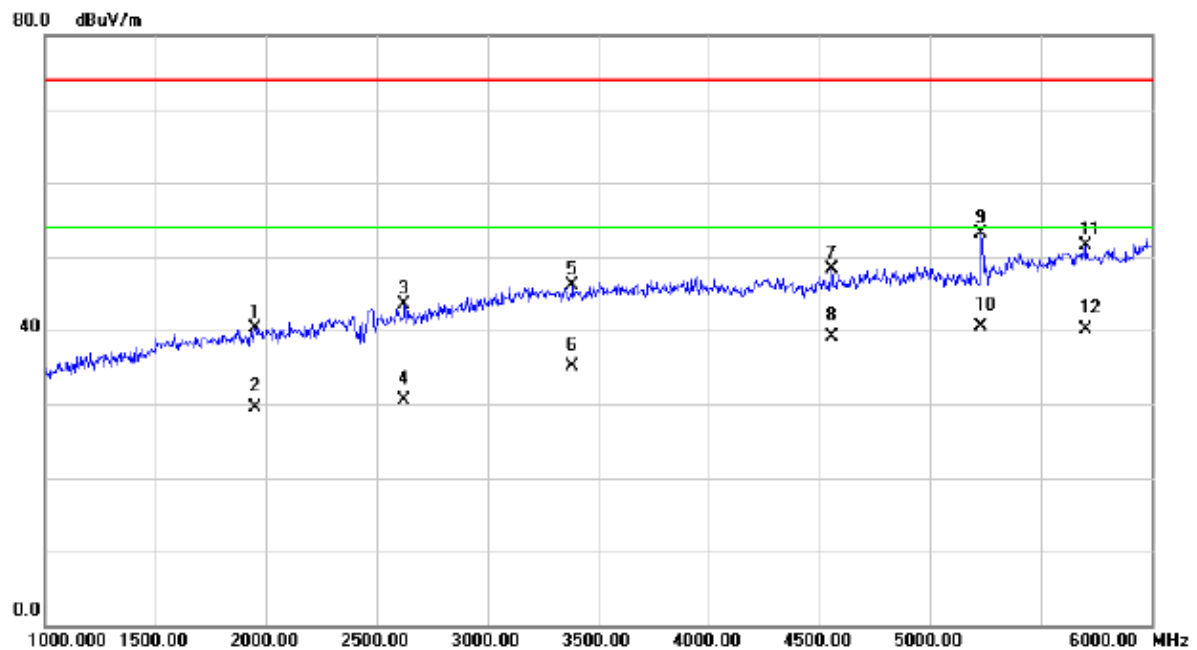


| No. | Mk. | Freq.    | Reading | Correct | Measure- | Limit  | Margin |          |         |
|-----|-----|----------|---------|---------|----------|--------|--------|----------|---------|
|     |     | MHz      | Level   | Factor  | ment     |        |        |          |         |
|     |     |          | dBuV    | dB      | dBuV/m   | dBuV/m | dB     | Detector | Comment |
| 1   |     | 1950.000 | 42.56   | -2.18   | 40.38    | 74.00  | -33.62 | peak     |         |
| 2   |     | 1950.000 | 31.62   | -2.18   | 29.44    | 54.00  | -24.56 | AVG      |         |
| 3   |     | 2625.000 | 43.46   | 0.01    | 43.47    | 74.00  | -30.53 | peak     |         |
| 4   |     | 2625.000 | 30.57   | 0.01    | 30.58    | 54.00  | -23.42 | AVG      |         |
| 5   |     | 3385.000 | 42.44   | 3.64    | 46.08    | 74.00  | -27.92 | peak     |         |
| 6   |     | 3385.000 | 31.44   | 3.64    | 35.08    | 54.00  | -18.92 | AVG      |         |
| 7   |     | 4555.000 | 42.40   | 5.83    | 48.23    | 74.00  | -25.77 | peak     |         |
| 8   |     | 4555.000 | 33.25   | 5.83    | 39.08    | 54.00  | -14.92 | AVG      |         |
| 9   |     | 5230.000 | 45.44   | 7.76    | 53.20    | 74.00  | -20.80 | peak     |         |
| 10  | *   | 5230.000 | 32.67   | 7.76    | 40.43    | 54.00  | -13.57 | AVG      |         |
| 11  |     | 5705.000 | 41.66   | 9.89    | 51.55    | 74.00  | -22.45 | peak     |         |
| 12  |     | 5705.000 | 30.27   | 9.89    | 40.16    | 54.00  | -13.84 | AVG      |         |

|               |                                                                                                          |                     |              |
|---------------|----------------------------------------------------------------------------------------------------------|---------------------|--------------|
| E.U.T :       | HUAWEI MediaPad M2 8.0                                                                                   | Model Name :        | M2-802L      |
| Temperature : | 22° C                                                                                                    | Relative Humidity : | 55 %         |
| Pressure :    | 1012 hPa                                                                                                 | Test Voltage :      | AC 120V/60Hz |
| Test Mode :   | Traffic + 2.4G wifi + BT + GPS +<br>earphone + Camera on<br>– Adapter: BYD / Desktop<br>(B67432F1E00013) | Polarization:       | Horizontal   |

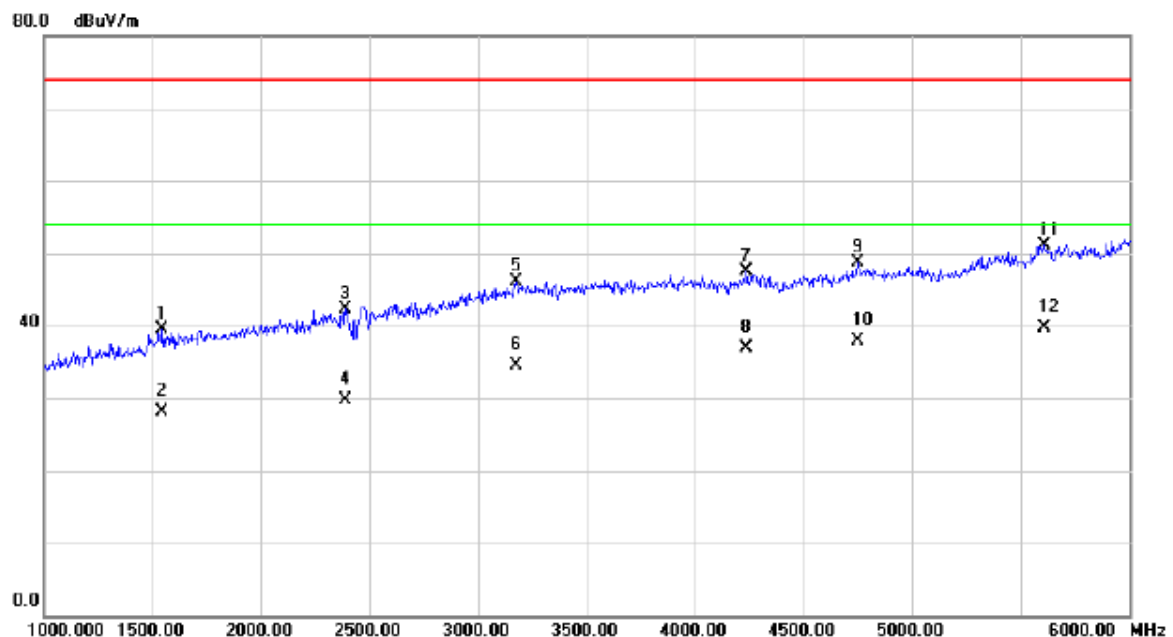


| No. | Mk. | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dB | Measure-<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|-----|--------------|--------------------------|-------------------------|----------------------------|-----------------|--------------|----------|---------|
| 1   |     | 1545.000     | 43.93                    | -4.48                   | 39.45                      | 74.00           | -34.55       | peak     |         |
| 2   |     | 1545.000     | 32.59                    | -4.48                   | 28.11                      | 54.00           | -25.89       | AVG      |         |
| 3   |     | 2390.000     | 43.20                    | -0.96                   | 42.24                      | 74.00           | -31.76       | peak     |         |
| 4   |     | 2390.000     | 30.74                    | -0.96                   | 29.78                      | 54.00           | -24.22       | AVG      |         |
| 5   |     | 3175.000     | 43.38                    | 2.80                    | 46.18                      | 74.00           | -27.82       | peak     |         |
| 6   |     | 3175.000     | 31.62                    | 2.80                    | 34.42                      | 54.00           | -19.58       | AVG      |         |
| 7   |     | 4235.000     | 42.13                    | 5.28                    | 47.41                      | 74.00           | -26.59       | peak     |         |
| 8   |     | 4235.000     | 31.55                    | 5.28                    | 36.83                      | 54.00           | -17.17       | AVG      |         |
| 9   |     | 4750.000     | 42.48                    | 6.27                    | 48.75                      | 74.00           | -25.25       | peak     |         |
| 10  |     | 4750.000     | 31.57                    | 6.27                    | 37.84                      | 54.00           | -16.16       | AVG      |         |
| 11  |     | 5610.000     | 41.74                    | 9.40                    | 51.14                      | 74.00           | -22.86       | peak     |         |
| 12  | *   | 5610.000     | 30.24                    | 9.40                    | 39.64                      | 54.00           | -14.36       | AVG      |         |

|               |                                                                                                         |                     |              |
|---------------|---------------------------------------------------------------------------------------------------------|---------------------|--------------|
| E.U.T :       | HUAWEI MediaPad M2 8.0                                                                                  | Model Name :        | M2-802L      |
| Temperature : | 22° C                                                                                                   | Relative Humidity : | 55 %         |
| Pressure :    | 1012 hPa                                                                                                | Test Voltage :      | AC 120V/60Hz |
| Test Mode :   | Traffic + 2.4G wifi + BT + GPS +<br>earphone + Camera on<br>– Adapter: HK / Desktop<br>(H67416F6100005) | Polarization:       | Vertical     |

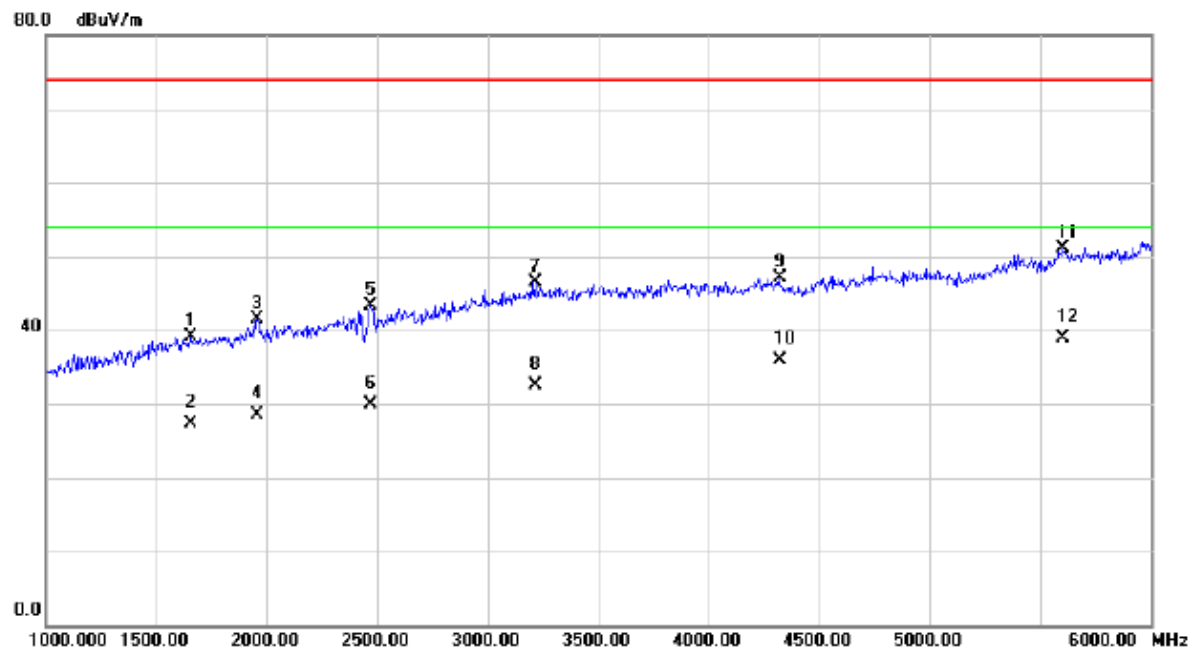


| No. | Mk. | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dB | Measure-<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|-----|--------------|--------------------------|-------------------------|----------------------------|-----------------|--------------|----------|---------|
| 1   |     | 1655.000     | 42.98                    | -3.85                   | 39.13                      | 74.00           | -34.87       | peak     |         |
| 2   |     | 1655.000     | 31.25                    | -3.85                   | 27.40                      | 54.00           | -26.60       | AVG      |         |
| 3   |     | 1955.000     | 43.66                    | -2.15                   | 41.51                      | 74.00           | -32.49       | peak     |         |
| 4   |     | 1955.000     | 30.64                    | -2.15                   | 28.49                      | 54.00           | -25.51       | AVG      |         |
| 5   |     | 2470.000     | 44.05                    | -0.76                   | 43.29                      | 74.00           | -30.71       | peak     |         |
| 6   |     | 2470.000     | 30.61                    | -0.76                   | 29.85                      | 54.00           | -24.15       | AVG      |         |
| 7   |     | 3215.000     | 43.58                    | 2.96                    | 46.54                      | 74.00           | -27.46       | peak     |         |
| 8   |     | 3215.000     | 29.57                    | 2.96                    | 32.53                      | 54.00           | -21.47       | AVG      |         |
| 9   |     | 4320.000     | 41.67                    | 5.41                    | 47.08                      | 74.00           | -26.92       | peak     |         |
| 10  |     | 4320.000     | 30.51                    | 5.41                    | 35.92                      | 54.00           | -18.08       | AVG      |         |
| 11  |     | 5600.000     | 41.76                    | 9.36                    | 51.12                      | 74.00           | -22.88       | peak     |         |
| 12  | *   | 5600.000     | 29.54                    | 9.36                    | 38.90                      | 54.00           | -15.10       | AVG      |         |

|               |                                                                                                         |                     |              |
|---------------|---------------------------------------------------------------------------------------------------------|---------------------|--------------|
| E.U.T :       | HUAWEI MediaPad M2 8.0                                                                                  | Model Name :        | M2-802L      |
| Temperature : | 22° C                                                                                                   | Relative Humidity : | 55 %         |
| Pressure :    | 1012 hPa                                                                                                | Test Voltage :      | AC 120V/60Hz |
| Test Mode :   | Traffic + 2.4G wifi + BT + GPS +<br>earphone + Camera on<br>– Adapter: HK / Desktop<br>(H67416F6100005) | Polarization:       | Horizontal   |

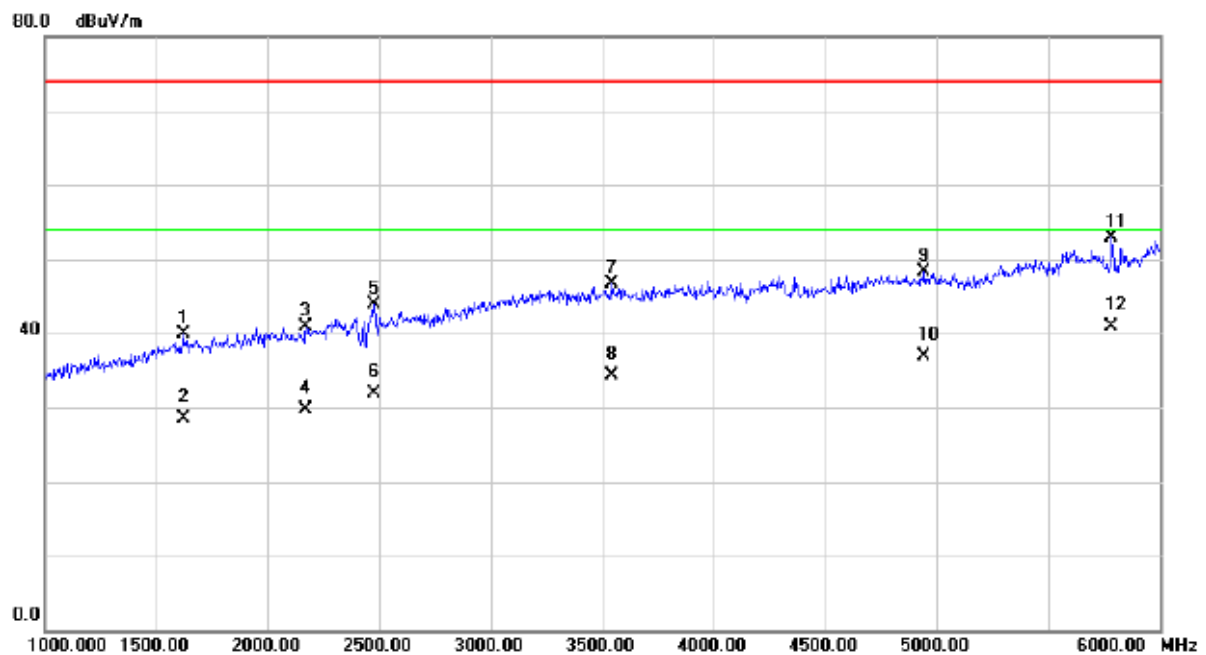


| No. | Mk. | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dB | Measure-<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|-----|--------------|--------------------------|-------------------------|----------------------------|-----------------|--------------|----------|---------|
| 1   |     | 1620.000     | 43.92                    | -4.06                   | 39.86                      | 74.00           | -34.14       | peak     |         |
| 2   |     | 1620.000     | 32.54                    | -4.06                   | 28.48                      | 54.00           | -25.52       | AVG      |         |
| 3   |     | 2170.000     | 42.38                    | -1.49                   | 40.89                      | 74.00           | -33.11       | peak     |         |
| 4   |     | 2170.000     | 31.12                    | -1.49                   | 29.63                      | 54.00           | -24.37       | AVG      |         |
| 5   |     | 2475.000     | 44.67                    | -0.75                   | 43.92                      | 74.00           | -30.08       | peak     |         |
| 6   |     | 2475.000     | 32.57                    | -0.75                   | 31.82                      | 54.00           | -22.18       | AVG      |         |
| 7   |     | 3545.000     | 42.56                    | 4.19                    | 46.75                      | 74.00           | -27.25       | peak     |         |
| 8   |     | 3545.000     | 30.21                    | 4.19                    | 34.40                      | 54.00           | -19.60       | AVG      |         |
| 9   |     | 4945.000     | 41.53                    | 6.70                    | 48.23                      | 74.00           | -25.77       | peak     |         |
| 10  |     | 4945.000     | 30.15                    | 6.70                    | 36.85                      | 54.00           | -17.15       | AVG      |         |
| 11  |     | 5780.000     | 42.67                    | 10.27                   | 52.94                      | 74.00           | -21.06       | peak     |         |
| 12  | *   | 5780.000     | 30.57                    | 10.27                   | 40.84                      | 54.00           | -13.16       | AVG      |         |

|               |                                                                                                             |                     |              |
|---------------|-------------------------------------------------------------------------------------------------------------|---------------------|--------------|
| E.U.T :       | HUAWEI MediaPad M2 8.0                                                                                      | Model Name :        | M2-802L      |
| Temperature : | 22° C                                                                                                       | Relative Humidity : | 55 %         |
| Pressure :    | 1012 hPa                                                                                                    | Test Voltage :      | AC 120V/60Hz |
| Test Mode :   | Traffic + 2.4G wifi + BT + GPS +<br>earphone + Camera on<br>– Adapter: PHITEK / Desktop<br>(P67401F5W00017) | Polarization:       | Vertical     |

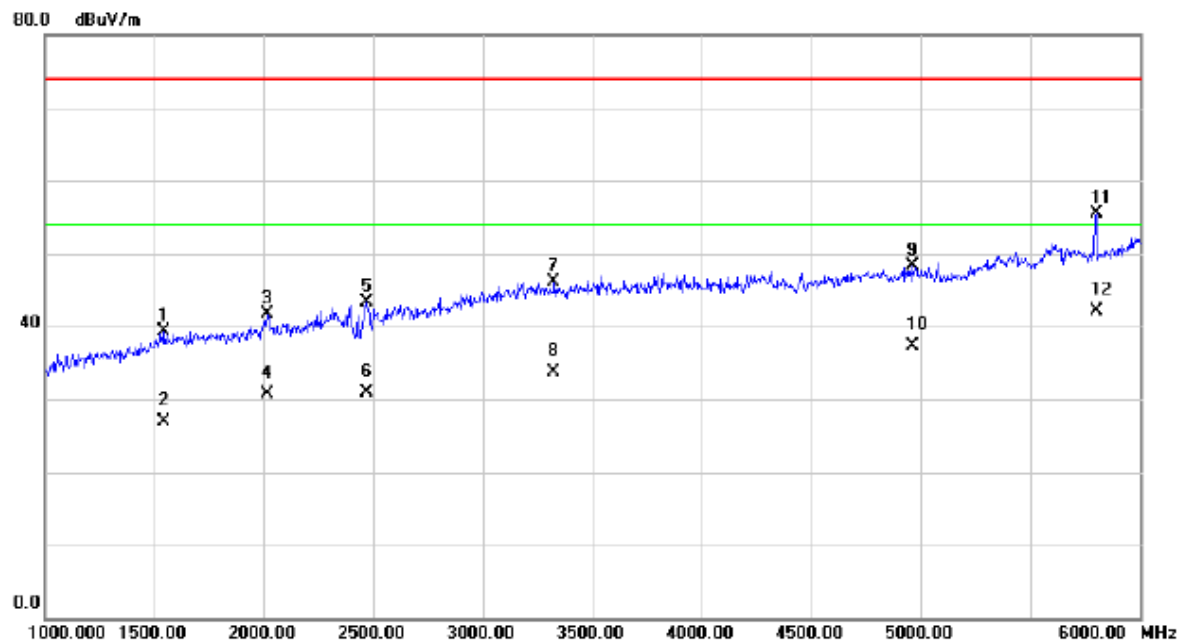


| No. | Mk. | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dB | Measure-<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|-----|--------------|--------------------------|-------------------------|----------------------------|-----------------|--------------|----------|---------|
| 1   |     | 1540.000     | 43.71                    | -4.50                   | 39.21                      | 74.00           | -34.79       | peak     |         |
| 2   |     | 1540.000     | 31.46                    | -4.50                   | 26.96                      | 54.00           | -27.04       | AVG      |         |
| 3   |     | 2015.000     | 43.51                    | -1.86                   | 41.65                      | 74.00           | -32.35       | peak     |         |
| 4   |     | 2015.000     | 32.61                    | -1.86                   | 30.75                      | 54.00           | -23.25       | AVG      |         |
| 5   |     | 2470.000     | 44.06                    | -0.76                   | 43.30                      | 74.00           | -30.70       | peak     |         |
| 6   |     | 2470.000     | 31.62                    | -0.76                   | 30.86                      | 54.00           | -23.14       | AVG      |         |
| 7   |     | 3325.000     | 42.67                    | 3.40                    | 46.07                      | 74.00           | -27.93       | peak     |         |
| 8   |     | 3325.000     | 30.26                    | 3.40                    | 33.66                      | 54.00           | -20.34       | AVG      |         |
| 9   |     | 4960.000     | 41.54                    | 6.74                    | 48.28                      | 74.00           | -25.72       | peak     |         |
| 10  |     | 4960.000     | 30.61                    | 6.74                    | 37.35                      | 54.00           | -16.65       | AVG      |         |
| 11  |     | 5800.000     | 45.20                    | 10.38                   | 55.58                      | 74.00           | -18.42       | peak     |         |
| 12  | *   | 5800.000     | 31.72                    | 10.38                   | 42.10                      | 54.00           | -11.90       | AVG      |         |

|               |                                                                                                          |                     |              |
|---------------|----------------------------------------------------------------------------------------------------------|---------------------|--------------|
| E.U.T :       | HUAWEI MediaPad M2 8.0                                                                                   | Model Name :        | M2-802L      |
| Temperature : | 22° C                                                                                                    | Relative Humidity : | 55 %         |
| Pressure :    | 1012 hPa                                                                                                 | Test Voltage :      | AC 120V/60Hz |
| Test Mode :   | Traffic + 2.4G wifi + BT + GPS +<br>earphone + Camera on<br>– Adapter: BYD / Desktop<br>(P67401F5W00017) | Polarization:       | Horizontal   |

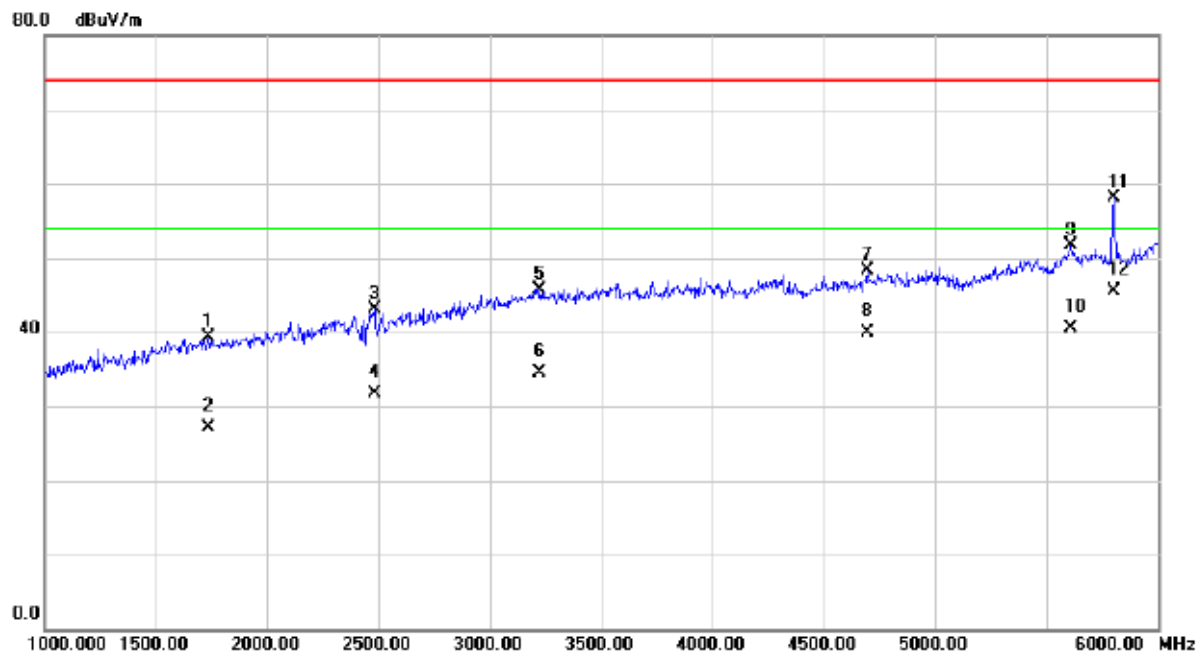


| No. | Mk. | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dB | Measure-<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|-----|--------------|--------------------------|-------------------------|----------------------------|-----------------|--------------|----------|---------|
| 1   |     | 1735.000     | 42.73                    | -3.40                   | 39.33                      | 74.00           | -34.67       | peak     |         |
| 2   |     | 1735.000     | 30.57                    | -3.40                   | 27.17                      | 54.00           | -26.83       | AVG      |         |
| 3   |     | 2480.000     | 43.87                    | -0.74                   | 43.13                      | 74.00           | -30.87       | peak     |         |
| 4   |     | 2480.000     | 32.51                    | -0.74                   | 31.77                      | 54.00           | -22.23       | AVG      |         |
| 5   |     | 3225.000     | 42.80                    | 3.00                    | 45.80                      | 74.00           | -28.20       | peak     |         |
| 6   |     | 3225.000     | 31.46                    | 3.00                    | 34.46                      | 54.00           | -19.54       | AVG      |         |
| 7   |     | 4695.000     | 42.20                    | 6.15                    | 48.35                      | 74.00           | -25.65       | peak     |         |
| 8   |     | 4695.000     | 33.69                    | 6.15                    | 39.84                      | 54.00           | -14.16       | AVG      |         |
| 9   |     | 5610.000     | 42.28                    | 9.40                    | 51.68                      | 74.00           | -22.32       | peak     |         |
| 10  |     | 5610.000     | 31.14                    | 9.40                    | 40.54                      | 54.00           | -13.46       | AVG      |         |
| 11  |     | 5800.000     | 47.79                    | 10.38                   | 58.17                      | 74.00           | -15.83       | peak     |         |
| 12  | *   | 5800.000     | 35.17                    | 10.38                   | 45.55                      | 54.00           | -8.45        | AVG      |         |

|               |                                                                                                            |                     |              |
|---------------|------------------------------------------------------------------------------------------------------------|---------------------|--------------|
| E.U.T :       | HUAWEI MediaPad M2 8.0                                                                                     | Model Name :        | M2-802L      |
| Temperature : | 22° C                                                                                                      | Relative Humidity : | 55 %         |
| Pressure :    | 1012 hPa                                                                                                   | Test Voltage :      | AC 120V/60Hz |
| Test Mode :   | Traffic + 2.4G wifi + BT + GPS +<br>earphone + Camera on<br>– Adapter: YINJU / Desktop<br>(Y67401F3G00038) | Polarization:       | Vertical     |

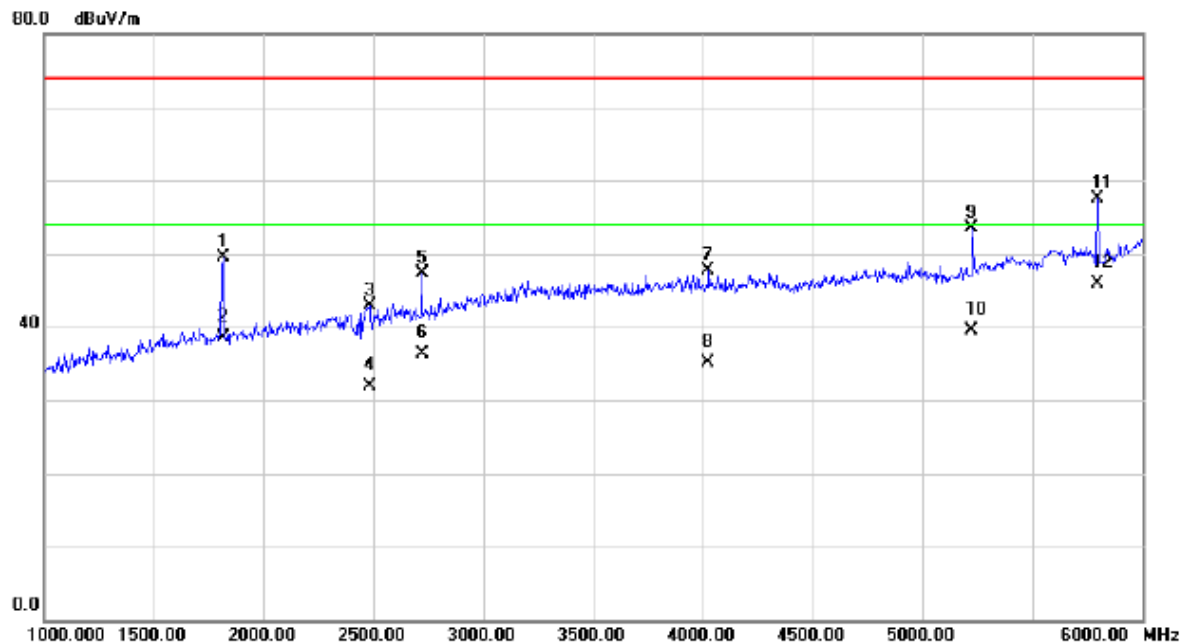


| No. | Mk. | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dB | Measure-<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|-----|--------------|--------------------------|-------------------------|----------------------------|-----------------|--------------|----------|---------|
| 1   |     | 1815.000     | 52.46                    | -2.95                   | 49.51                      | 74.00           | -24.49       | peak     |         |
| 2   |     | 1815.000     | 41.55                    | -2.95                   | 38.60                      | 54.00           | -15.40       | AVG      |         |
| 3   |     | 2480.000     | 43.67                    | -0.74                   | 42.93                      | 74.00           | -31.07       | peak     |         |
| 4   |     | 2480.000     | 32.62                    | -0.74                   | 31.88                      | 54.00           | -22.12       | AVG      |         |
| 5   |     | 2720.000     | 46.70                    | 0.54                    | 47.24                      | 74.00           | -26.76       | peak     |         |
| 6   |     | 2720.000     | 35.67                    | 0.54                    | 36.21                      | 54.00           | -17.79       | AVG      |         |
| 7   |     | 4025.000     | 42.75                    | 4.93                    | 47.68                      | 74.00           | -26.32       | peak     |         |
| 8   |     | 4025.000     | 30.25                    | 4.93                    | 35.18                      | 54.00           | -18.82       | AVG      |         |
| 9   |     | 5225.000     | 45.70                    | 7.74                    | 53.44                      | 74.00           | -20.56       | peak     |         |
| 10  |     | 5225.000     | 31.67                    | 7.74                    | 39.41                      | 54.00           | -14.59       | AVG      |         |
| 11  |     | 5795.000     | 47.16                    | 10.35                   | 57.51                      | 74.00           | -16.49       | peak     |         |
| 12  | *   | 5795.000     | 35.61                    | 10.35                   | 45.96                      | 54.00           | -8.04        | AVG      |         |

|               |                                                                                                            |                     |              |
|---------------|------------------------------------------------------------------------------------------------------------|---------------------|--------------|
| E.U.T :       | HUAWEI MediaPad M2 8.0                                                                                     | Model Name :        | M2-802L      |
| Temperature : | 22° C                                                                                                      | Relative Humidity : | 55 %         |
| Pressure :    | 1012 hPa                                                                                                   | Test Voltage :      | AC 120V/60Hz |
| Test Mode :   | Traffic + 2.4G wifi + BT + GPS +<br>earphone + Camera on<br>– Adapter: YINJU / Desktop<br>(Y67401F3G00038) | Polarization:       | Horizontal   |

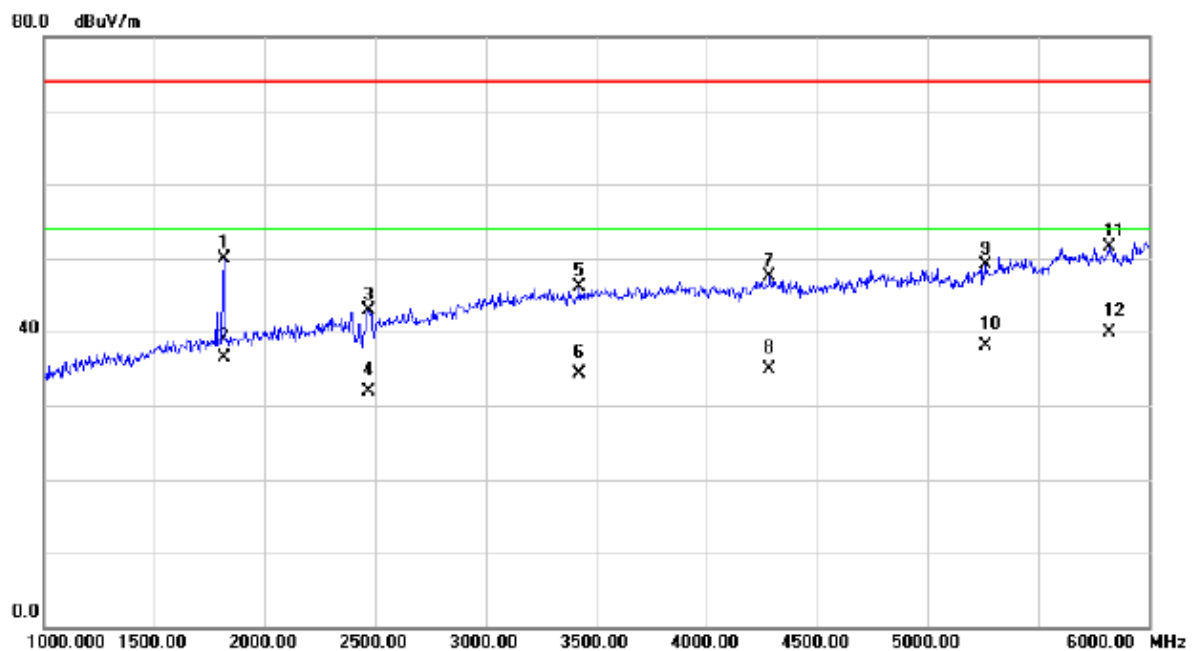


| No. | Mk. | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dB | Measure-<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|-----|--------------|--------------------------|-------------------------|----------------------------|-----------------|--------------|----------|---------|
| 1   |     | 1815.000     | 52.88                    | -2.95                   | 49.93                      | 74.00           | -24.07       | peak     |         |
| 2   |     | 1815.000     | 39.54                    | -2.95                   | 36.59                      | 54.00           | -17.41       | AVG      |         |
| 3   |     | 2470.000     | 43.63                    | -0.76                   | 42.87                      | 74.00           | -31.13       | peak     |         |
| 4   |     | 2470.000     | 32.61                    | -0.76                   | 31.85                      | 54.00           | -22.15       | AVG      |         |
| 5   |     | 3425.000     | 42.27                    | 3.80                    | 46.07                      | 74.00           | -27.93       | peak     |         |
| 6   |     | 3425.000     | 30.51                    | 3.80                    | 34.31                      | 54.00           | -19.69       | AVG      |         |
| 7   |     | 4285.000     | 42.13                    | 5.36                    | 47.49                      | 74.00           | -26.51       | peak     |         |
| 8   |     | 4285.000     | 29.54                    | 5.36                    | 34.90                      | 54.00           | -19.10       | AVG      |         |
| 9   |     | 5260.000     | 41.20                    | 7.88                    | 49.08                      | 74.00           | -24.92       | peak     |         |
| 10  |     | 5260.000     | 30.17                    | 7.88                    | 38.05                      | 54.00           | -15.95       | AVG      |         |
| 11  |     | 5820.000     | 40.96                    | 10.48                   | 51.44                      | 74.00           | -22.56       | peak     |         |
| 12  | *   | 5820.000     | 29.41                    | 10.48                   | 39.89                      | 54.00           | -14.11       | AVG      |         |

|               |                                                                                                            |                     |              |
|---------------|------------------------------------------------------------------------------------------------------------|---------------------|--------------|
| E.U.T :       | HUAWEI MediaPad M2 8.0                                                                                     | Model Name :        | M2-802L      |
| Temperature : | 22° C                                                                                                      | Relative Humidity : | 55 %         |
| Pressure :    | 1012 hPa                                                                                                   | Test Voltage :      | AC 120V/60Hz |
| Test Mode :   | Traffic + 2.4G wifi + BT + GPS +<br>earphone + Camera on<br>– Adapter: BYD / Desktop<br>(HWBYA32DC1600019) | Polarization:       | Vertical     |

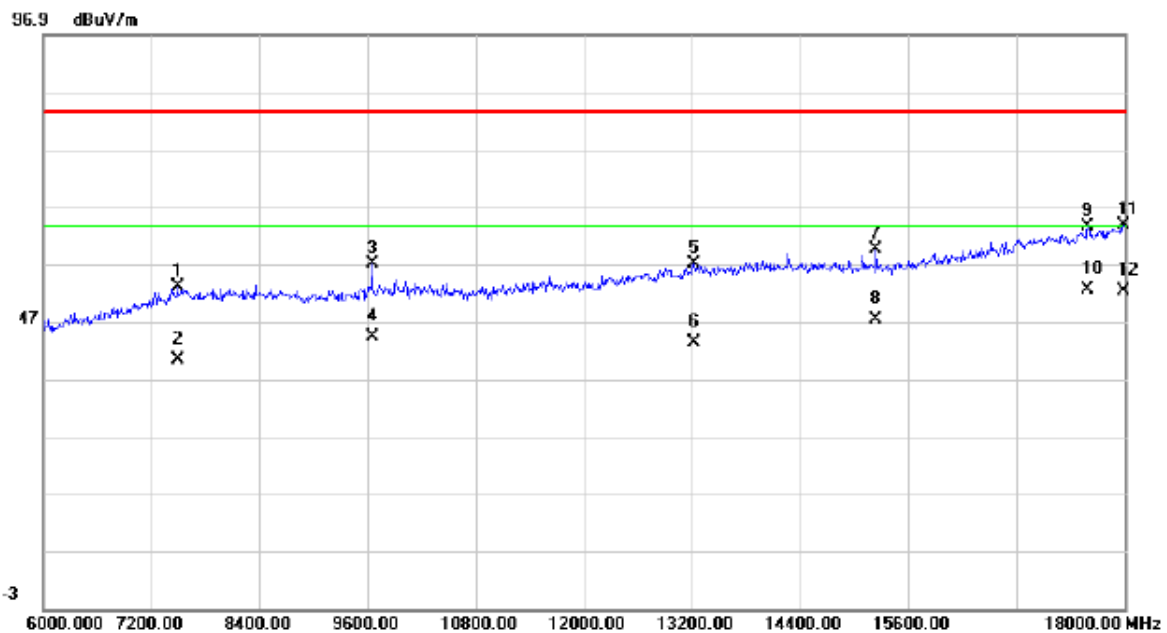


| No. Mk. | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dB | Measure-<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|---------|--------------|--------------------------|-------------------------|----------------------------|-----------------|--------------|----------|---------|
| 1       | 7488.000     | 36.45                    | 16.51                   | 52.96                      | 83.50           | -30.54       | peak     |         |
| 2       | 7488.000     | 23.74                    | 16.51                   | 40.25                      | 63.50           | -23.25       | AVG      |         |
| 3       | 9648.000     | 39.04                    | 18.10                   | 57.14                      | 83.50           | -26.36       | peak     |         |
| 4       | 9648.000     | 26.15                    | 18.10                   | 44.25                      | 63.50           | -19.25       | AVG      |         |
| 5       | 13224.00     | 33.23                    | 23.68                   | 56.91                      | 83.50           | -26.59       | peak     |         |
| 6       | 13224.00     | 19.57                    | 23.68                   | 43.25                      | 63.50           | -20.25       | AVG      |         |
| 7       | 15240.00     | 35.45                    | 23.98                   | 59.43                      | 83.50           | -24.07       | peak     |         |
| 8       | 15240.00     | 23.30                    | 23.98                   | 47.28                      | 63.50           | -16.22       | AVG      |         |
| 9       | 17592.00     | 32.89                    | 30.56                   | 63.45                      | 83.50           | -20.05       | peak     |         |
| 10 *    | 17592.00     | 22.05                    | 30.56                   | 52.61                      | 63.50           | -10.89       | AVG      |         |
| 11      | 17988.00     | 32.10                    | 31.60                   | 63.70                      | 83.50           | -19.80       | peak     |         |
| 12      | 17988.00     | 20.63                    | 31.60                   | 52.23                      | 63.50           | -11.27       | AVG      |         |

|               |                                                                                                            |                     |              |
|---------------|------------------------------------------------------------------------------------------------------------|---------------------|--------------|
| E.U.T :       | HUAWEI MediaPad M2 8.0                                                                                     | Model Name :        | M2-802L      |
| Temperature : | 22° C                                                                                                      | Relative Humidity : | 55 %         |
| Pressure :    | 1012 hPa                                                                                                   | Test Voltage :      | AC 120V/60Hz |
| Test Mode :   | Traffic + 2.4G wifi + BT + GPS +<br>earphone + Camera on<br>– Adapter: BYD / Desktop<br>(HWBYA32DC1600019) | Polarization:       | Horizontal   |

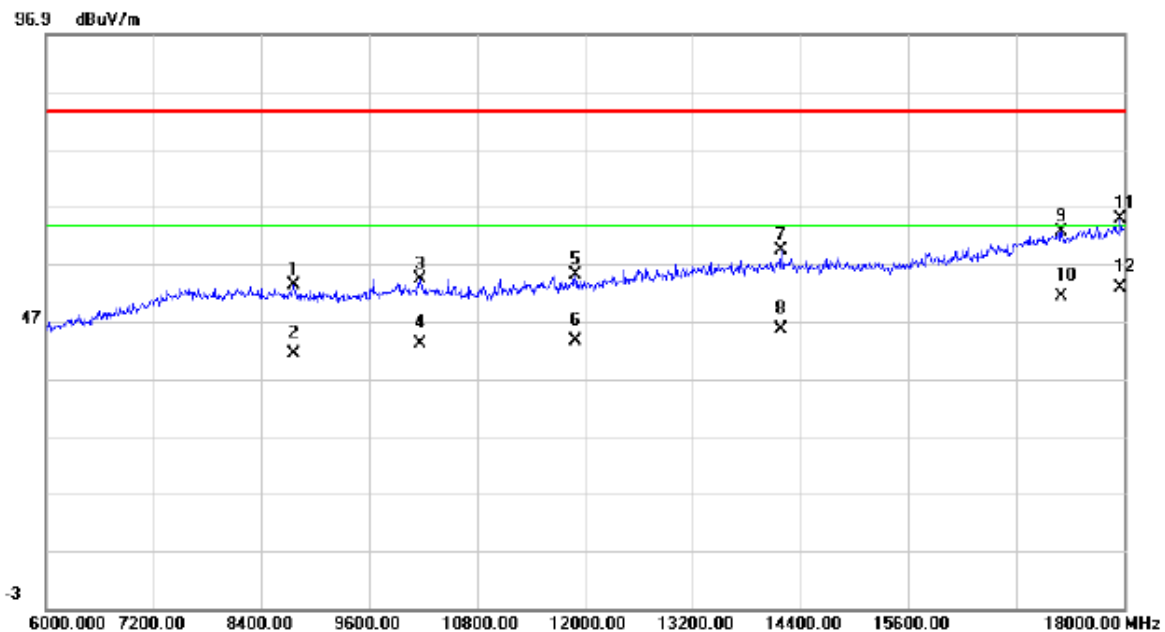


| No. | Mk. | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dB | Measure-<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|-----|--------------|--------------------------|-------------------------|----------------------------|-----------------|--------------|----------|---------|
| 1   |     | 8760.00      | 36.22                    | 17.11                   | 53.33                      | 83.50           | -30.17       | peak     |         |
| 2   |     | 8760.00      | 24.14                    | 17.11                   | 41.25                      | 63.50           | -22.25       | AVG      |         |
| 3   |     | 10164.00     | 35.82                    | 18.52                   | 54.34                      | 83.50           | -29.16       | peak     |         |
| 4   |     | 10164.00     | 24.50                    | 18.52                   | 43.02                      | 63.50           | -20.48       | AVG      |         |
| 5   |     | 11892.00     | 35.14                    | 19.99                   | 55.13                      | 83.50           | -28.37       | peak     |         |
| 6   |     | 11892.00     | 23.44                    | 19.99                   | 43.43                      | 63.50           | -20.07       | AVG      |         |
| 7   |     | 14184.00     | 34.56                    | 24.62                   | 59.18                      | 83.50           | -24.32       | peak     |         |
| 8   |     | 14184.00     | 21.00                    | 24.62                   | 45.62                      | 63.50           | -17.88       | AVG      |         |
| 9   |     | 17304.00     | 32.75                    | 29.76                   | 62.51                      | 83.50           | -20.99       | peak     |         |
| 10  |     | 17304.00     | 21.47                    | 29.76                   | 51.23                      | 63.50           | -12.27       | AVG      |         |
| 11  |     | 17964.00     | 33.16                    | 31.54                   | 64.70                      | 83.50           | -18.80       | peak     |         |
| 12  | *   | 17964.00     | 21.15                    | 31.54                   | 52.69                      | 63.50           | -10.81       | AVG      |         |

|               |                                                                                                          |                     |              |
|---------------|----------------------------------------------------------------------------------------------------------|---------------------|--------------|
| E.U.T :       | HUAWEI MediaPad M2 8.0                                                                                   | Model Name :        | M2-802L      |
| Temperature : | 22° C                                                                                                    | Relative Humidity : | 55 %         |
| Pressure :    | 1012 hPa                                                                                                 | Test Voltage :      | AC 120V/60Hz |
| Test Mode :   | Traffic + 2.4G wifi + BT + GPS +<br>earphone + Camera on<br>– Adapter: BYD / Desktop<br>(B67432F1E00013) | Polarization:       | Vertical     |

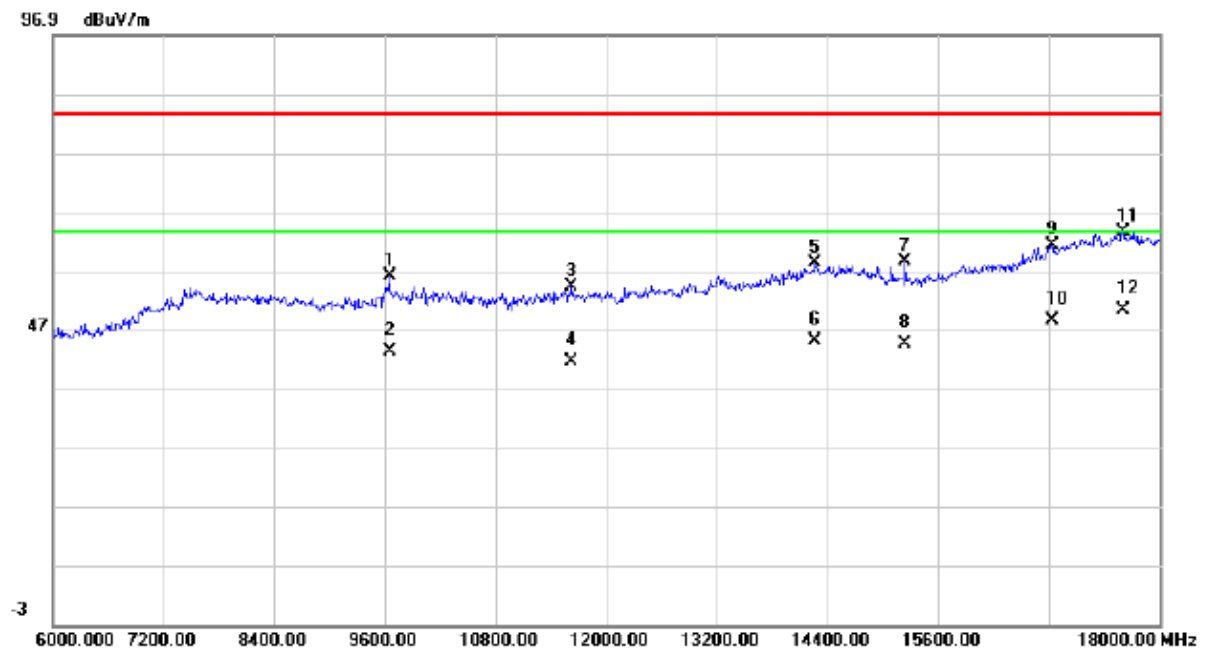

| No. | Mk. | Freq.    | Reading | Correct | Measure- | Limit  | Margin |          |         |
|-----|-----|----------|---------|---------|----------|--------|--------|----------|---------|
|     |     | MHz      | Level   | Factor  | ment     |        |        |          |         |
|     |     |          | dBuV    | dB      | dBuV/m   | dBuV/m | dB     | Detector | Comment |
| 1   |     | 9648.00  | 38.04   | 18.10   | 56.14    | 83.50  | -27.36 | peak     |         |
| 2   |     | 9648.00  | 25.13   | 18.10   | 43.23    | 63.50  | -20.27 | AVG      |         |
| 3   |     | 11628.00 | 34.07   | 20.15   | 54.22    | 83.50  | -29.28 | peak     |         |
| 4   |     | 11628.00 | 21.44   | 20.15   | 41.59    | 63.50  | -21.91 | AVG      |         |
| 5   |     | 14268.00 | 33.65   | 24.55   | 58.20    | 83.50  | -25.30 | peak     |         |
| 6   |     | 14268.00 | 20.56   | 24.55   | 45.11    | 63.50  | -18.39 | AVG      |         |
| 7   |     | 15240.00 | 34.45   | 23.98   | 58.43    | 83.50  | -25.07 | peak     |         |
| 8   |     | 15240.00 | 20.47   | 23.98   | 44.45    | 63.50  | -19.05 | AVG      |         |
| 9   |     | 16836.00 | 33.03   | 28.16   | 61.19    | 83.50  | -22.31 | peak     |         |
| 10  |     | 16836.00 | 20.32   | 28.16   | 48.48    | 63.50  | -15.02 | AVG      |         |
| 11  |     | 17604.00 | 32.91   | 30.59   | 63.50    | 83.50  | -20.00 | peak     |         |
| 12  | *   | 17604.00 | 19.58   | 30.59   | 50.17    | 63.50  | -13.33 | AVG      |         |


|               |                                                                                                          |                     |              |
|---------------|----------------------------------------------------------------------------------------------------------|---------------------|--------------|
| E.U.T :       | HUAWEI MediaPad M2 8.0                                                                                   | Model Name :        | M2-802L      |
| Temperature : | 22° C                                                                                                    | Relative Humidity : | 55 %         |
| Pressure :    | 1012 hPa                                                                                                 | Test Voltage :      | AC 120V/60Hz |
| Test Mode :   | Traffic + 2.4G wifi + BT + GPS +<br>earphone + Camera on<br>– Adapter: BYD / Desktop<br>(B67432F1E00013) | Polarization:       | Horizontal   |

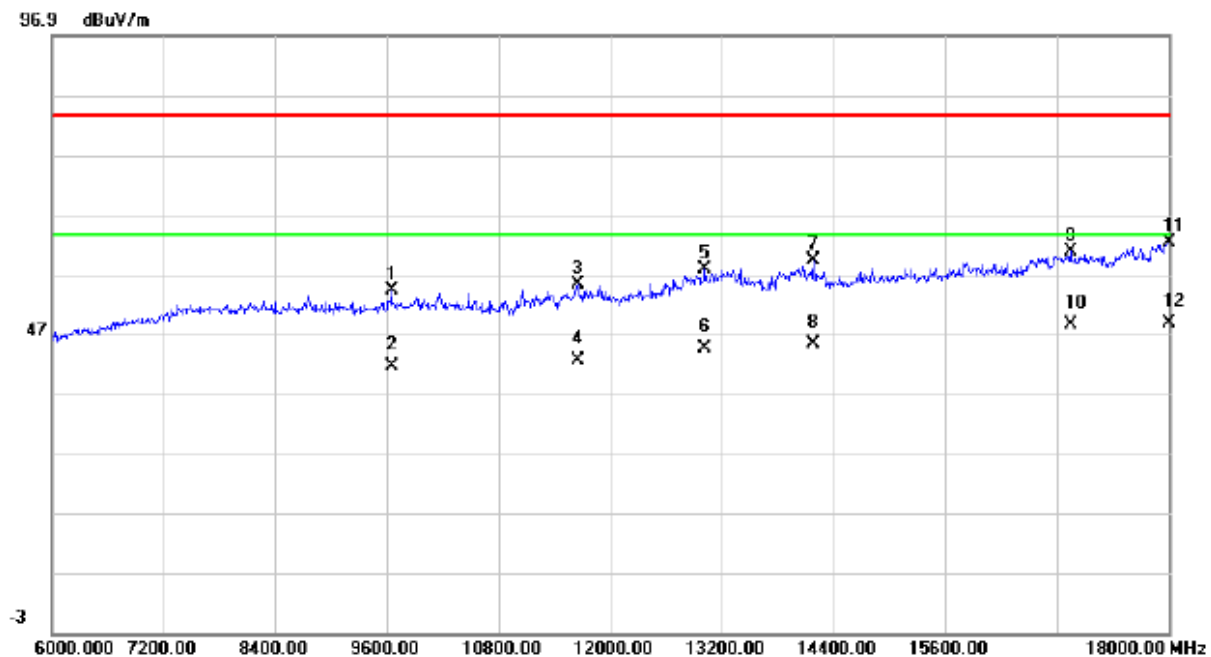


| No. | Mk. | Freq.    | Reading Level | Correct Factor | Measurement | Limit  | Margin |          |         |
|-----|-----|----------|---------------|----------------|-------------|--------|--------|----------|---------|
|     |     | MHz      | dBuV          | dB             | dBuV/m      | dBuV/m | dB     | Detector | Comment |
| 1   |     | 9648.000 | 36.12         | 18.10          | 54.22       | 83.50  | -29.28 | peak     |         |
| 2   |     | 9648.000 | 23.45         | 18.10          | 41.55       | 63.50  | -21.95 | AVG      |         |
| 3   |     | 11652.00 | 35.26         | 20.14          | 55.40       | 83.50  | -28.10 | peak     |         |
| 4   |     | 11652.00 | 22.41         | 20.14          | 42.55       | 63.50  | -20.95 | AVG      |         |
| 5   |     | 13020.00 | 34.57         | 23.25          | 57.82       | 83.50  | -25.68 | peak     |         |
| 6   |     | 13020.00 | 21.35         | 23.25          | 44.60       | 63.50  | -18.90 | AVG      |         |
| 7   |     | 14184.00 | 34.56         | 24.62          | 59.18       | 83.50  | -24.32 | peak     |         |
| 8   |     | 14184.00 | 20.72         | 24.62          | 45.34       | 63.50  | -18.16 | AVG      |         |
| 9   |     | 16944.00 | 32.07         | 28.64          | 60.71       | 83.50  | -22.79 | peak     |         |
| 10  |     | 16944.00 | 20.01         | 28.64          | 48.65       | 63.50  | -14.85 | AVG      |         |
| 11  |     | 18000.00 | 30.56         | 31.63          | 62.19       | 83.50  | -21.31 | peak     |         |
| 12  | *   | 18000.00 | 17.17         | 31.63          | 48.80       | 63.50  | -14.70 | AVG      |         |

## 6. EUT TEST PHOTO

### Conducted Measurement Photos Mode 1~4

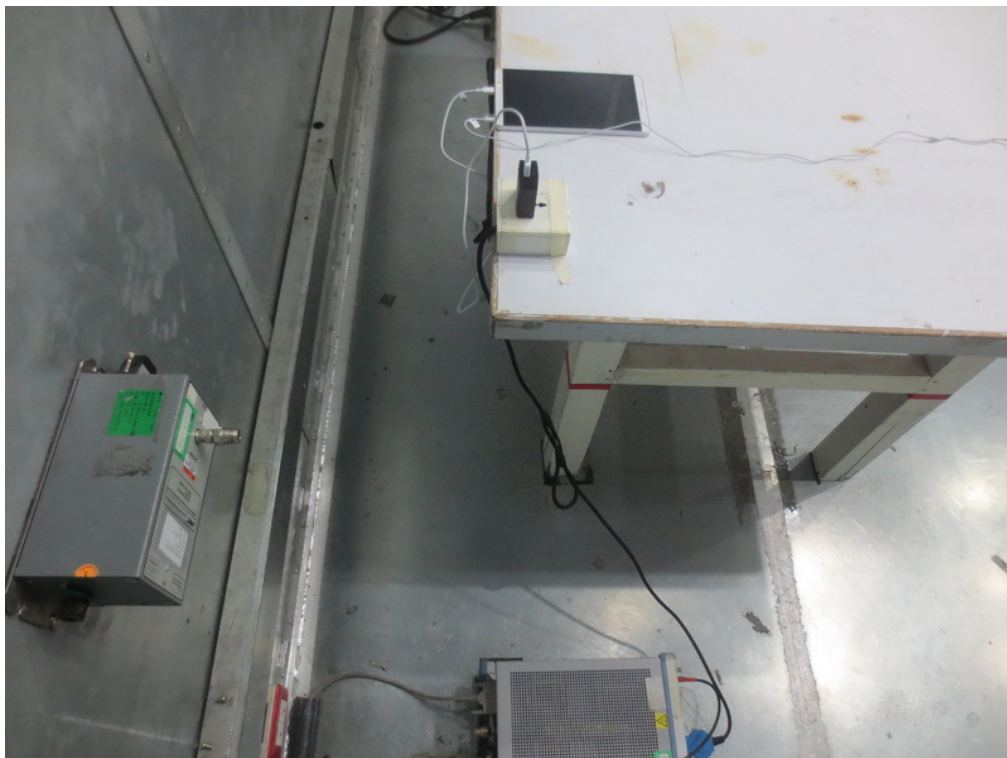


**Conducted Measurement Photos  
Mode 5**

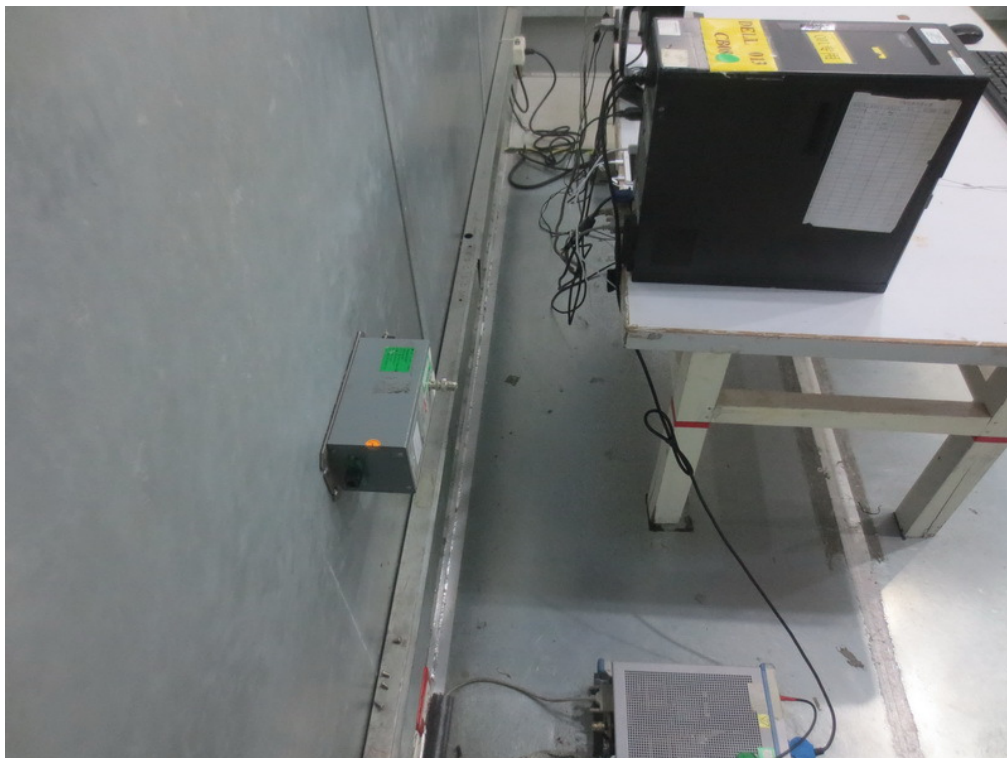



**Radiated Measurement Photos  
Below 1G - Mode 1~4**



**Radiated Measurement Photos  
Below 1G - Mode 5**

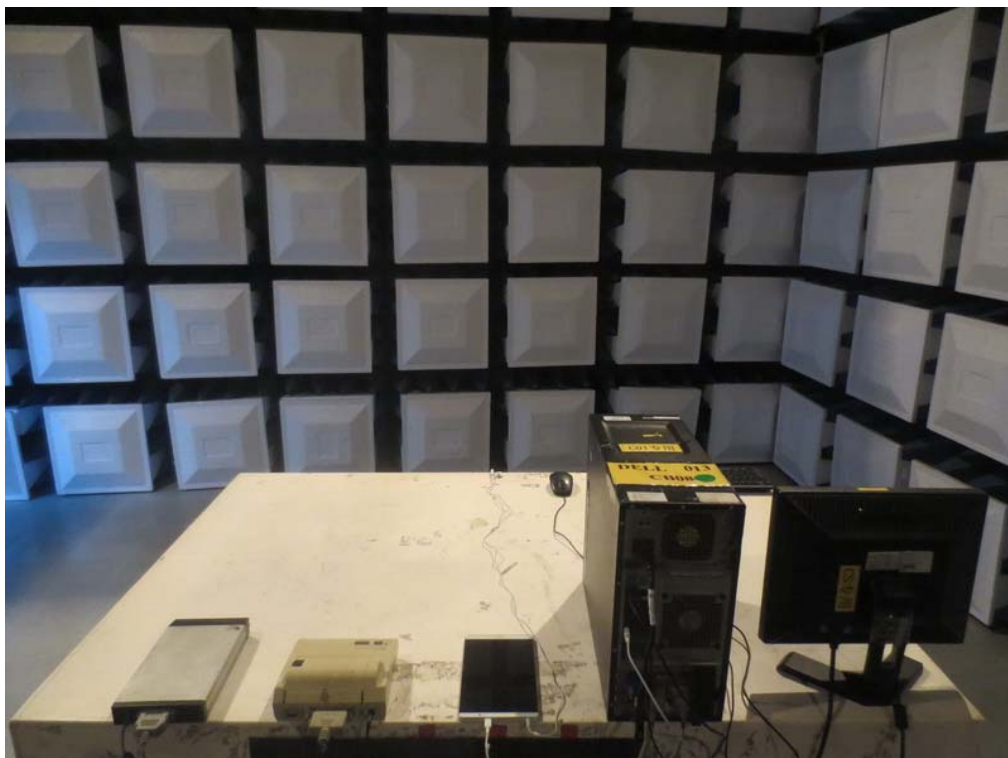

**Radiated Measurement Photos**  
**Above 1GHz - Mode 1~4**

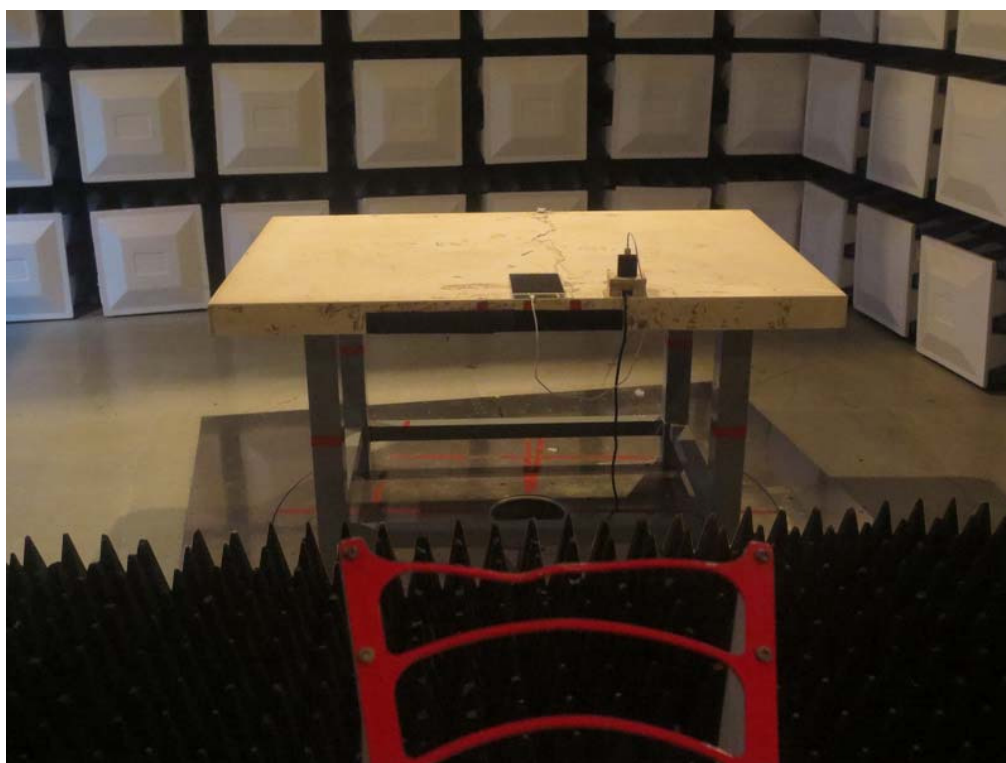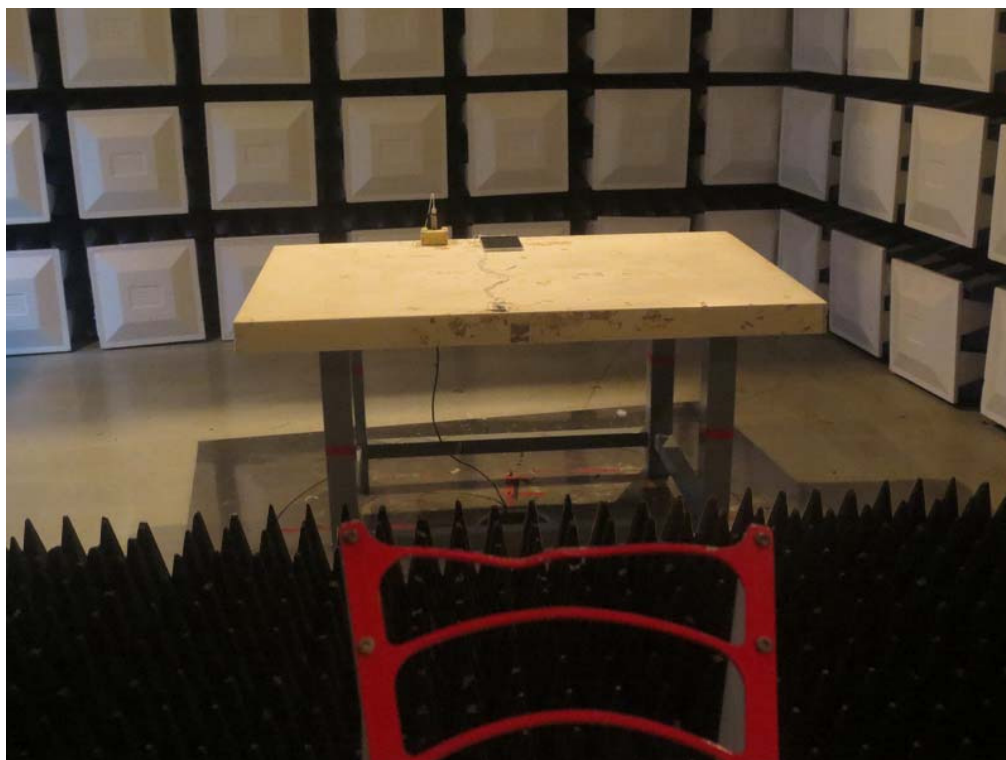

**Radiated Measurement Photos  
Below 1G - Mode 5**

