

**Appendix B. SAR Measurement Plots**

Table of contents
GSM850 Head (Second Antenna)
GSM850 Body (Second Antenna)
GSM1900 Head (Second Antenna)
GSM1900 Body (Second Antenna)
UMTS Band II Head (Second Antenna)
UMTS Band II Body (Second Antenna)
UMTS Band IV Head (Second Antenna)
UMTS Band IV Body (Second Antenna)
UMTS Band V Head (Second Antenna)
UMTS Band V Body (Second Antenna)
LTE Band II Head (Second Antenna)
LTE Band II Body (Second Antenna)
LTE Band IV Head (Second Antenna)
LTE Band IV Body (Second Antenna)
LTE Band V Head (Second Antenna)
LTE Band V Body (Second Antenna)
LTE Band VII Head (Second Antenna)
LTE Band VII Body (Second Antenna)
LTE Band XII Head (Second Antenna)
LTE Band XII Body (Second Antenna)
LTE Band XVII Head (Second Antenna)
LTE Band XVII Body (Second Antenna)
LTE Band XXVI Head (Second Antenna)
LTE Band XXVI Body (Second Antenna)
LTE Band XXXVIII Head (Second Antenna)
LTE Band XXXVIII Body (Second Antenna)
LTE Band XLI Head (Second Antenna)
LTE Band XLI Body (Second Antenna)
GSM850 Head (Main Antenna)
GSM850 Body (Main Antenna)
GSM1900 Head (Main Antenna)
GSM1900 Body (Main Antenna)
UMTS Band II Head (Main Antenna)

UMTS Band II Body (Main Antenna)
UMTS Band IV Head (Main Antenna)
UMTS Band IV Body (Main Antenna)
UMTS Band V Head (Main Antenna)
UMTS Band V Body (Main Antenna)
LTE Band II Head (Main Antenna)
LTE Band II Body (Main Antenna)
LTE Band IV Head (Main Antenna)
LTE Band IV Body (Main Antenna)
LTE Band V Head (Main Antenna)
LTE Band V Body (Main Antenna)
LTE Band VII Head (Main Antenna)
LTE Band VII Body (Main Antenna)
LTE Band XII Head (Main Antenna)
LTE Band XII Body (Main Antenna)
LTE Band XVII Head (Main Antenna)
LTE Band XVII Body (Main Antenna)
LTE Band XXVI Head (Main Antenna)
LTE Band XXVI Body (Main Antenna)
LTE Band XXXVIII Head (Main Antenna)
LTE Band XXXVIII Body (Main Antenna)
LTE Band XLI Head (Main Antenna)
LTE Band XLI Body (Main Antenna)
WiFi 2.4G Head
WiFi 2.4G Body
WiFi 5G Head
WiFi 5G Body

Test Laboratory: HUAWEI SAR/HAC Lab

MHA-L29 GSM850 190CH Right touch-Second Antenna

DUT: MHA-L29; Type: Smart Phone; Serial: SAR2

Communication System: UID 0, HW-GSM\GPRS\EGPRS-1TS (0); Frequency: 836.6 MHz; Duty Cycle: 1:8.30042

Medium parameters used: $f = 837$ MHz; $\sigma = 0.902$ S/m; $\epsilon_r = 41.752$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY Configuration:

- ε Probe: EX3DV4 - SN3736; ConvF(9.22, 9.22, 9.22); Calibrated: 2017-4-27;
- ε Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- ε Electronics: DAE4 Sn852; Calibrated: 2017-4-27
- ε Phantom: SAM3; Type: SAM; Serial: TP-1597
- ε DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Head/Area Scan (9x14x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 1.61 W/kg


Configuration/Head/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 21.79 V/m; Power Drift = -0.01 dB

Peak SAR (extrapolated) = 2.23 W/kg

SAR(1 g) = 1.01 W/kg; SAR(10 g) = 0.547 W/kg

Maximum value of SAR (measured) = 1.75 W/kg

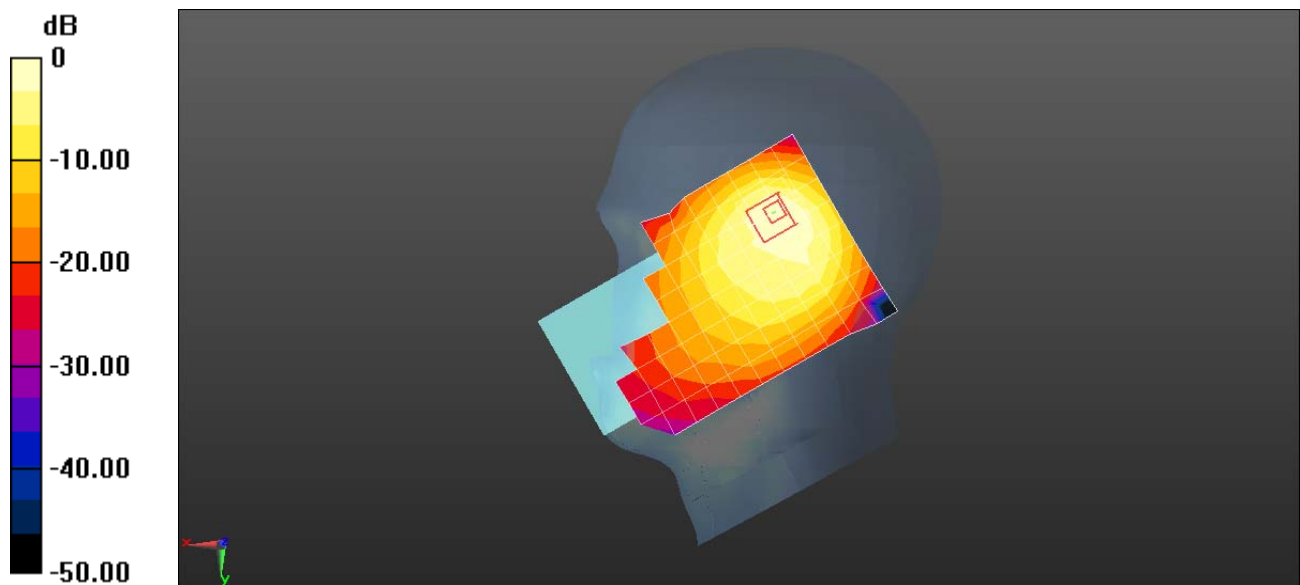

0 dB = 1.61 W/kg = 2.07 dBW/kg

Test Laboratory: HUAWEI SAR/HAC Lab

MHA-L29 GSM850 190CH Back side 15mm-Second Antenna

DUT: MHA-L29; Type: Smart Phone; Serial: SAR2

Communication System: UID 0, HW-GSM\GPRS\EGPRS-1TS (0); Frequency: 836.6 MHz; Duty Cycle: 1:8.30042

Medium parameters used: $f = 837$ MHz; $\sigma = 0.952$ S/m; $\epsilon_r = 54.25$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- ε Probe: EX3DV4 - SN3736; ConvF(9.36, 9.36, 9.36); Calibrated: 2017-4-27;
- ε Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- ε Electronics: DAE4 Sn852; Calibrated: 2017-4-27
- ε Phantom: SAM4; Type: SAM; Serial: TP-1620
- ε DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Body/Area Scan (9x14x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 0.255 W/kg


Configuration/Body/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 9.896 V/m; Power Drift = -0.08 dB

Peak SAR (extrapolated) = 0.311 W/kg

SAR(1 g) = 0.188 W/kg; SAR(10 g) = 0.112 W/kg

Maximum value of SAR (measured) = 0.266 W/kg

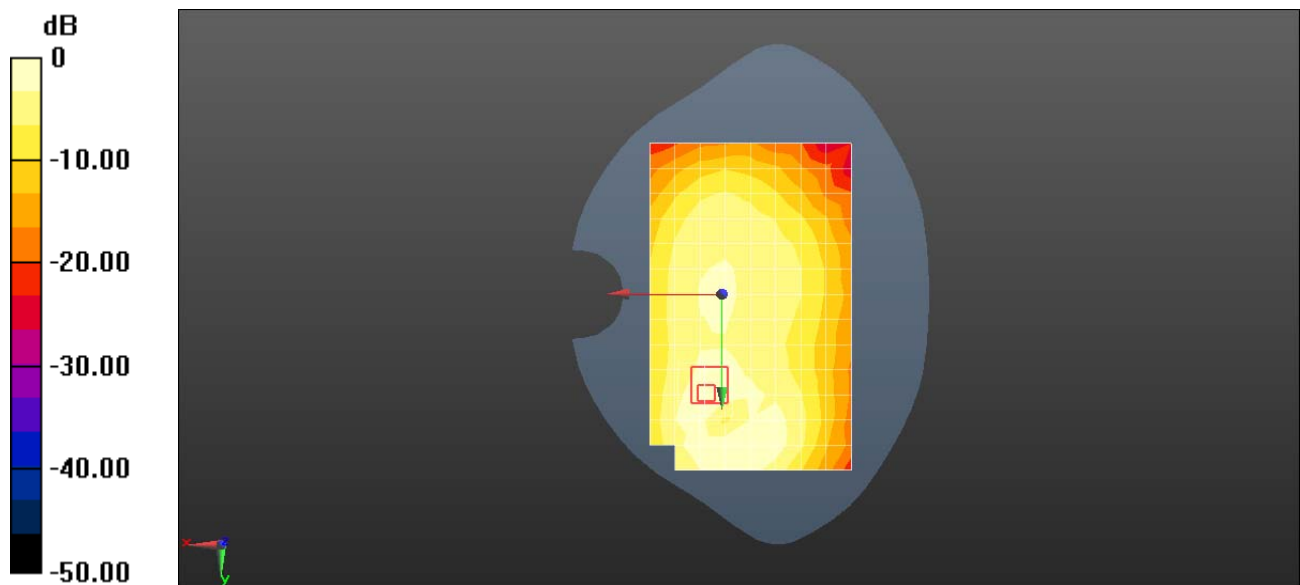

Test Laboratory: HUAWEI SAR/HAC Lab

MHA-L29 GSM850 GPRS 3TS 251CH Back side 10mm-Second Antenna

DUT: MHA-L29; Type: Smart Phone; Serial: SAR2

Communication System: UID 0, HW-GSM\GPRS\EGPRS-3TS (0); Frequency: 848.8 MHz; Duty Cycle: 1:2.77013

Medium parameters used: $f = 849 \text{ MHz}$; $\sigma = 0.958 \text{ S/m}$; $\epsilon_r = 54.202$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY Configuration:

- ε Probe: EX3DV4 - SN3736; ConvF(9.36, 9.36, 9.36); Calibrated: 2017-4-27;
- ε Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- ε Electronics: DAE4 Sn852; Calibrated: 2017-4-27
- ε Phantom: SAM4; Type: SAM; Serial: TP-1620
- ε DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Body/Area Scan (9x15x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (measured) = 0.995 W/kg


Configuration/Body/Zoom Scan (6x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 12.49 V/m ; Power Drift = -0.12 dB

Peak SAR (extrapolated) = 1.27 W/kg

SAR(1 g) = 0.710 W/kg ; SAR(10 g) = 0.399 W/kg

Maximum value of SAR (measured) = 1.01 W/kg

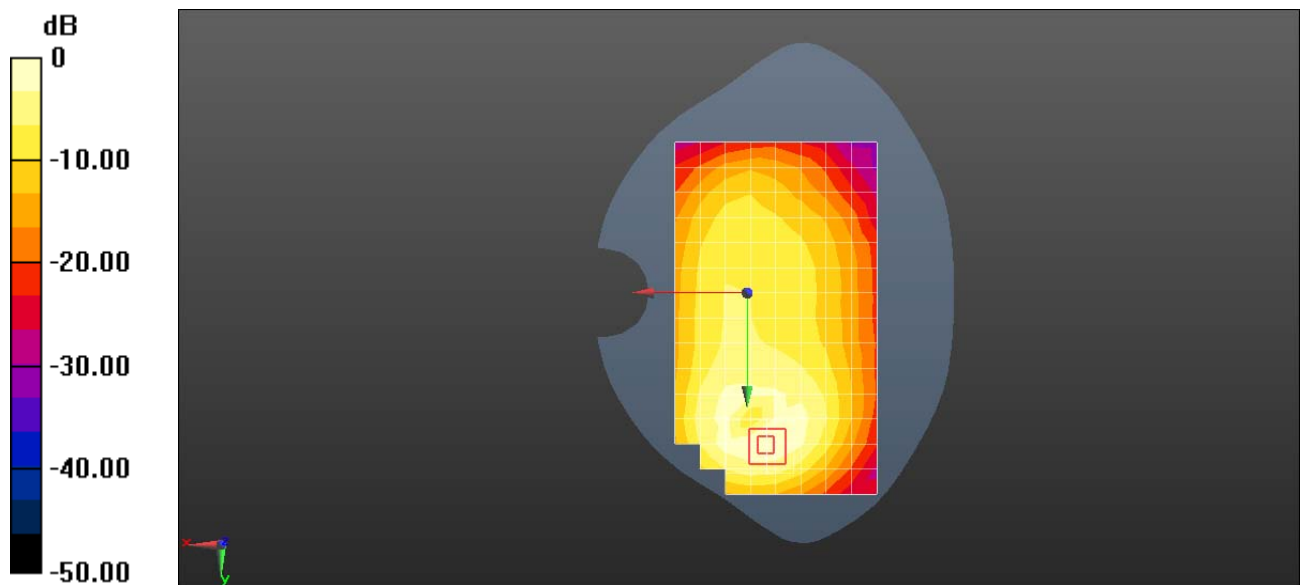

Test Laboratory: HUAWEI SAR/HAC Lab

MHA-L29 GSM1900 512CH Right touch-Second Antenna

DUT: MHA-L29; Type: Smart Phone; Serial: SAR2

Communication System: UID 0, HW-GSM\GPRS\EGPRS-1TS (0); Frequency: 1850.2 MHz; Duty Cycle: 1:8.30042

Medium parameters used (interpolated): $f = 1850.2$ MHz; $\sigma = 1.371$ S/m; $\epsilon_r = 39.449$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY Configuration:

- ε Probe: EX3DV4 - SN3736; ConvF(7.73, 7.73, 7.73); Calibrated: 2017-4-27;
- ε Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- ε Electronics: DAE4 Sn852; Calibrated: 2017-4-27
- ε Phantom: SAM3; Type: SAM; Serial: TP-1597
- ε DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Head/Area Scan (9x14x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 1.23 W/kg

Configuration/Head/Zoom Scan (5x6x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm


Reference Value = 15.25 V/m; Power Drift = 0.09 dB

Peak SAR (extrapolated) = 1.72 W/kg

SAR(1 g) = 0.909 W/kg; SAR(10 g) = 0.504 W/kg

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 1.26 W/kg

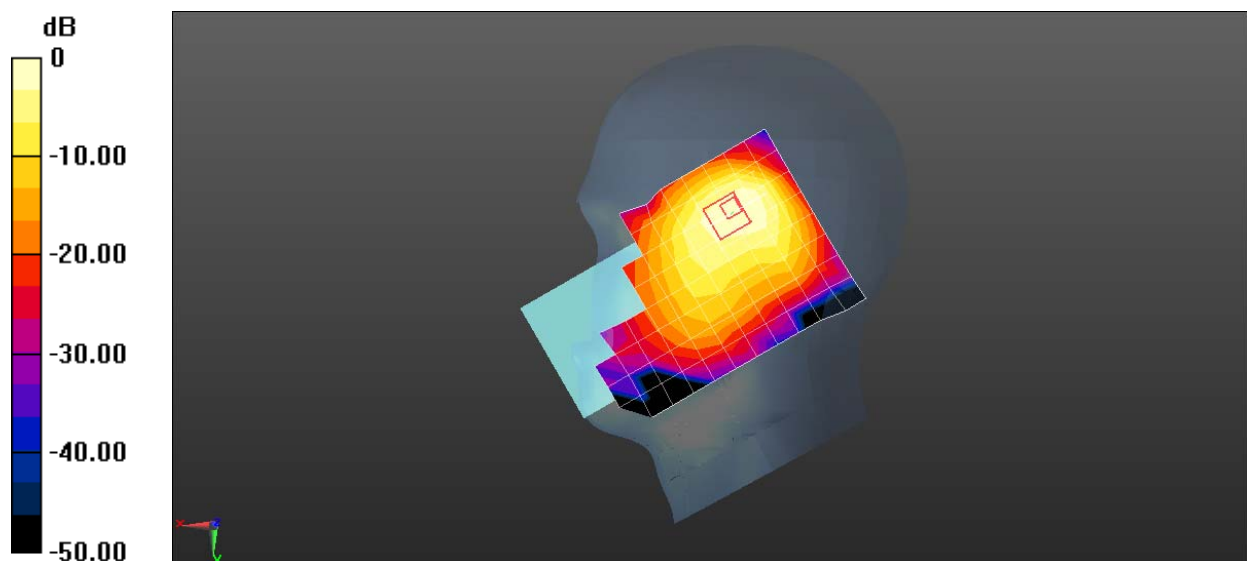

0 dB = 1.23 W/kg = 0.90 dBW/kg

Test Laboratory: HUAWEI SAR/HAC Lab

MHA-L29 GSM1900 661CH Front side 15mm-Second Antenna

DUT: MHA-L29; Type: Smart Phone; Serial: SAR2

Communication System: UID 0, HW-GSM\GPRS\EGPRS-1TS (0); Frequency: 1880 MHz; Duty Cycle: 1:8.30042

Medium parameters used: $f = 1880 \text{ MHz}$; $\sigma = 1.54 \text{ S/m}$; $\epsilon_r = 52.486$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY Configuration:

- ε Probe: EX3DV4 - SN3736; ConvF(7.5, 7.5, 7.5); Calibrated: 2017-4-27;
- ε Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- ε Electronics: DAE4 Sn852; Calibrated: 2017-4-27
- ε Phantom: SAM4; Type: SAM; Serial: TP-1620
- ε DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Body/Area Scan (9x14x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (measured) = 0.0939 W/kg

Configuration/Body/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 3.370 V/m ; Power Drift = 0.18 dB

Peak SAR (extrapolated) = 0.113 W/kg

SAR(1 g) = 0.070 W/kg ; SAR(10 g) = 0.045 W/kg

Maximum value of SAR (measured) = 0.0963 W/kg



Configuration/Body/Zoom Scan (5x5x7)/Cube 1: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 3.370 V/m ; Power Drift = 0.18 dB

Peak SAR (extrapolated) = 0.0960 W/kg

SAR(1 g) = 0.053 W/kg ; SAR(10 g) = 0.029 W/kg

Maximum value of SAR (measured) = 0.0787 W/kg

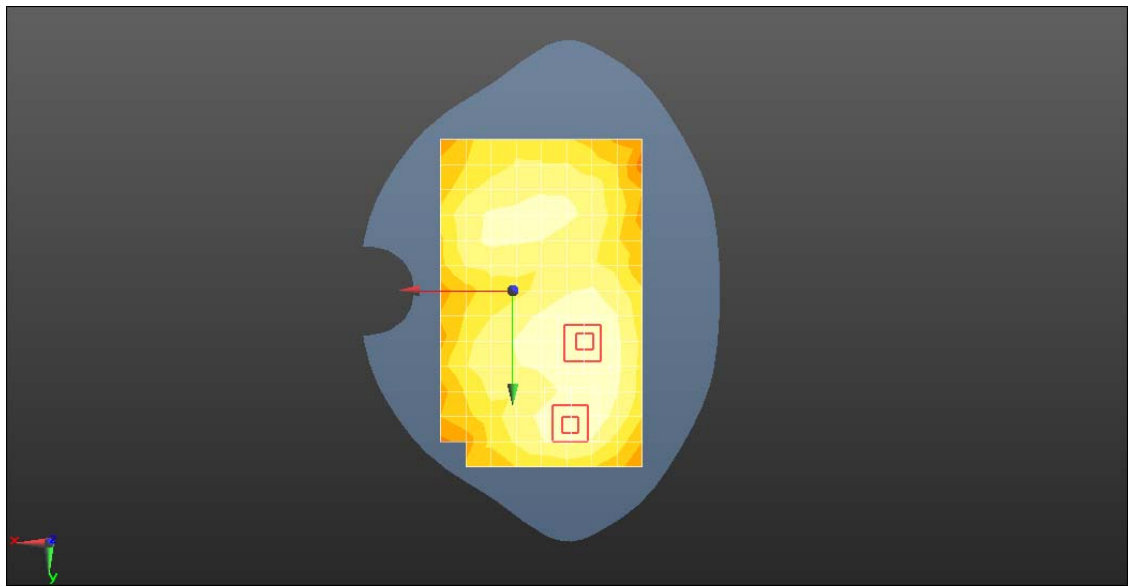

0 dB = 0.0939 W/kg = -10.27 dBW/kg

Test Laboratory: HUAWEI SAR/HAC Lab

MHA-L29 GSM1900 GPRS 2TS 661CH Top side 10mm-Second Antenna

DUT: MHA-L29; Type: Smart Phone; Serial: SAR2

Communication System: UID 0, HW-GSM\GPRS\EGPRS-2TS (0); Frequency: 1880 MHz; Duty Cycle: 1:4.10015

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.54$ S/m; $\epsilon_r = 52.486$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- ε Probe: EX3DV4 - SN3736; ConvF(7.5, 7.5, 7.5); Calibrated: 2017-4-27;
- ε Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- ε Electronics: DAE4 Sn852; Calibrated: 2017-4-27
- ε Phantom: SAM4; Type: SAM; Serial: TP-1620
- ε DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Body/Area Scan (5x11x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 0.259 W/kg


Configuration/Body/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 11.12 V/m; Power Drift = -0.09 dB

Peak SAR (extrapolated) = 0.354 W/kg

SAR(1 g) = 0.191 W/kg; SAR(10 g) = 0.100 W/kg

Maximum value of SAR (measured) = 0.291 W/kg

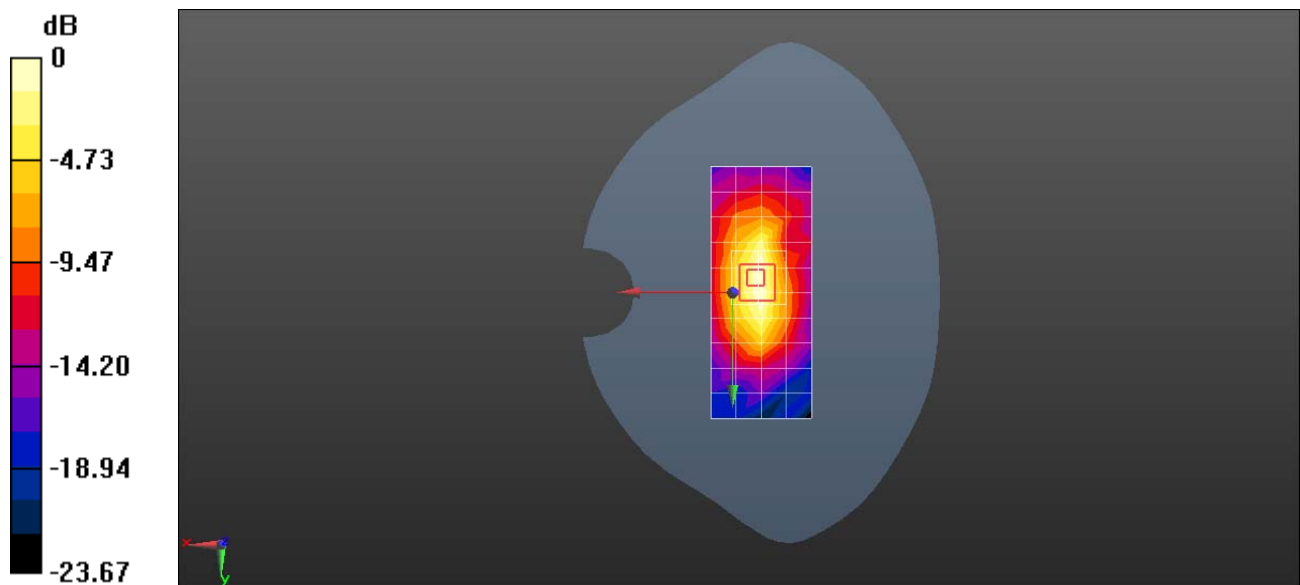

Test Laboratory: HUAWEI SAR/HAC Lab

MHA-L29 UMTS Band II 9538CH Right touch-Second Antenna

DUT: MHA-L29; Type: Smart Phone; Serial: SAR2

Communication System: UID 0, HW-UMTS-FDD(WCDMA) (0); Frequency: 1907.6 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1908$ MHz; $\sigma = 1.402$ S/m; $\epsilon_r = 39.377$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY Configuration:

- ε Probe: EX3DV4 - SN3736; ConvF(7.73, 7.73, 7.73); Calibrated: 2017-4-27;
- ε Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- ε Electronics: DAE4 Sn852; Calibrated: 2017-4-27
- ε Phantom: SAM3; Type: SAM; Serial: TP-1597
- ε DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Head/Area Scan (9x14x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 1.02 W/kg


Configuration/Head/Zoom Scan (5x6x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 12.43 V/m; Power Drift = -0.11 dB

Peak SAR (extrapolated) = 1.35 W/kg

SAR(1 g) = 0.680 W/kg; SAR(10 g) = 0.367 W/kg

Maximum value of SAR (measured) = 1.00 W/kg

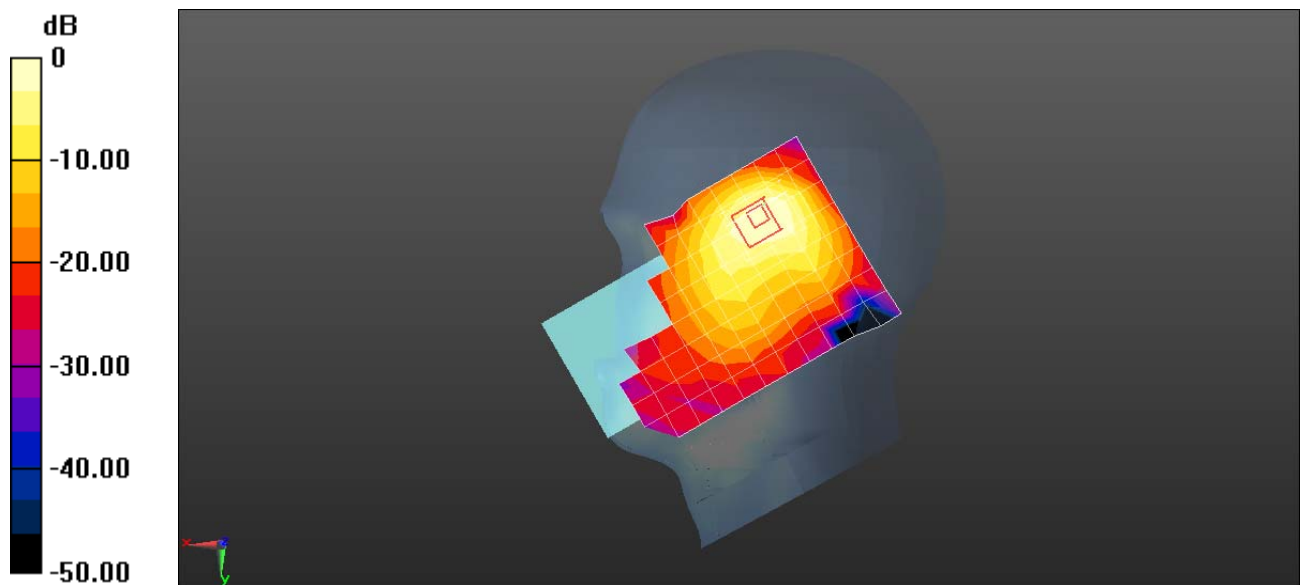

0 dB = 1.02 W/kg = 0.09 dBW/kg

Test Laboratory: HUAWEI SAR/HAC Lab

MHA-L29 UMTS Band II 9400CH Back side 15mm-Second Antenna

DUT: MHA-L29; Type: Smart Phone; Serial: SAR2

Communication System: UID 0, HW-UMTS-FDD(WCDMA) (0); Frequency: 1880 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.54$ S/m; $\epsilon_r = 52.486$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- ε Probe: EX3DV4 - SN3736; ConvF(7.5, 7.5, 7.5); Calibrated: 2017-4-27;
- ε Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- ε Electronics: DAE4 Sn852; Calibrated: 2017-4-27
- ε Phantom: SAM4; Type: SAM; Serial: TP-1620
- ε DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Body/Area Scan (9x14x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 0.0774 W/kg

Configuration/Body/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 2.479 V/m; Power Drift = 0.12 dB

Peak SAR (extrapolated) = 0.0890 W/kg

SAR(1 g) = 0.056 W/kg; SAR(10 g) = 0.036 W/kg

Maximum value of SAR (measured) = 0.0764 W/kg


Configuration/Body/Zoom Scan (5x5x7)/Cube 1: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 2.479 V/m; Power Drift = 0.12 dB

Peak SAR (extrapolated) = 0.0880 W/kg

SAR(1 g) = 0.049 W/kg; SAR(10 g) = 0.027 W/kg

Maximum value of SAR (measured) = 0.0725 W/kg

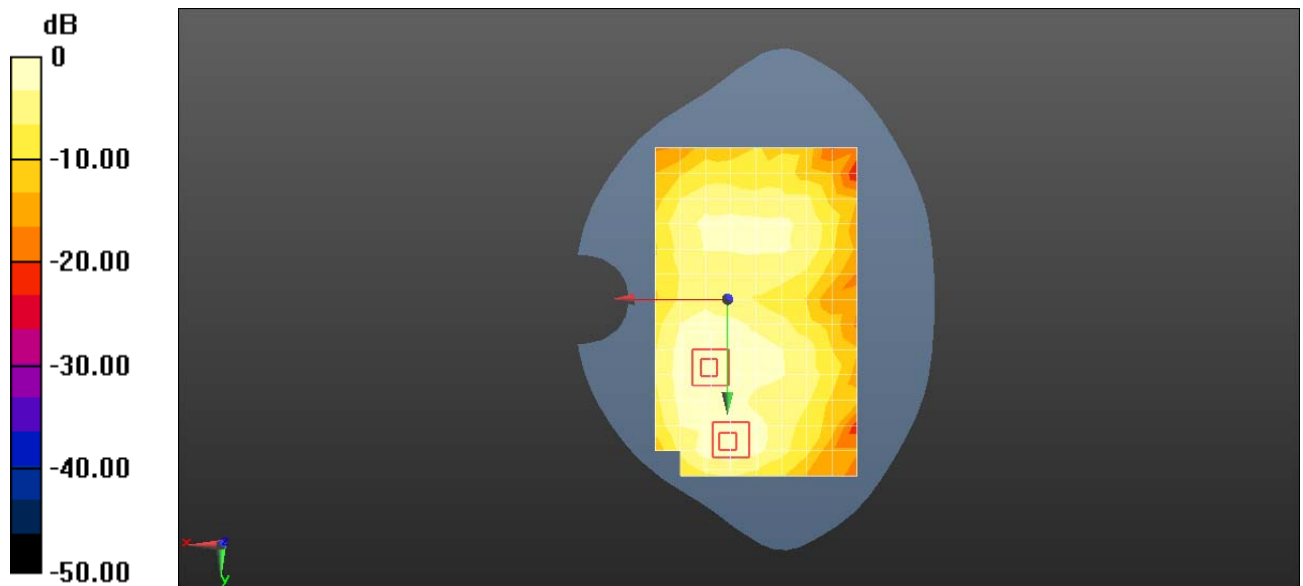

Test Laboratory: HUAWEI SAR/HAC Lab

MHA-L29 UMTS Band II 9400CH Top side 10mm-Second Antenna

DUT: MHA-L29; Type: Smart Phone; Serial: SAR2

Communication System: UID 0, HW-UMTS-FDD(WCDMA) (0); Frequency: 1880 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.54$ S/m; $\epsilon_r = 52.486$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- ε Probe: EX3DV4 - SN3736; ConvF(7.5, 7.5, 7.5); Calibrated: 2017-4-27;
- ε Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- ε Electronics: DAE4 Sn852; Calibrated: 2017-4-27
- ε Phantom: SAM4; Type: SAM; Serial: TP-1620
- ε DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Body/Area Scan (5x11x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 0.191 W/kg


Configuration/Body/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 9.296 V/m; Power Drift = -0.13 dB

Peak SAR (extrapolated) = 0.235 W/kg

SAR(1 g) = 0.128 W/kg; SAR(10 g) = 0.068 W/kg

Maximum value of SAR (measured) = 0.198 W/kg

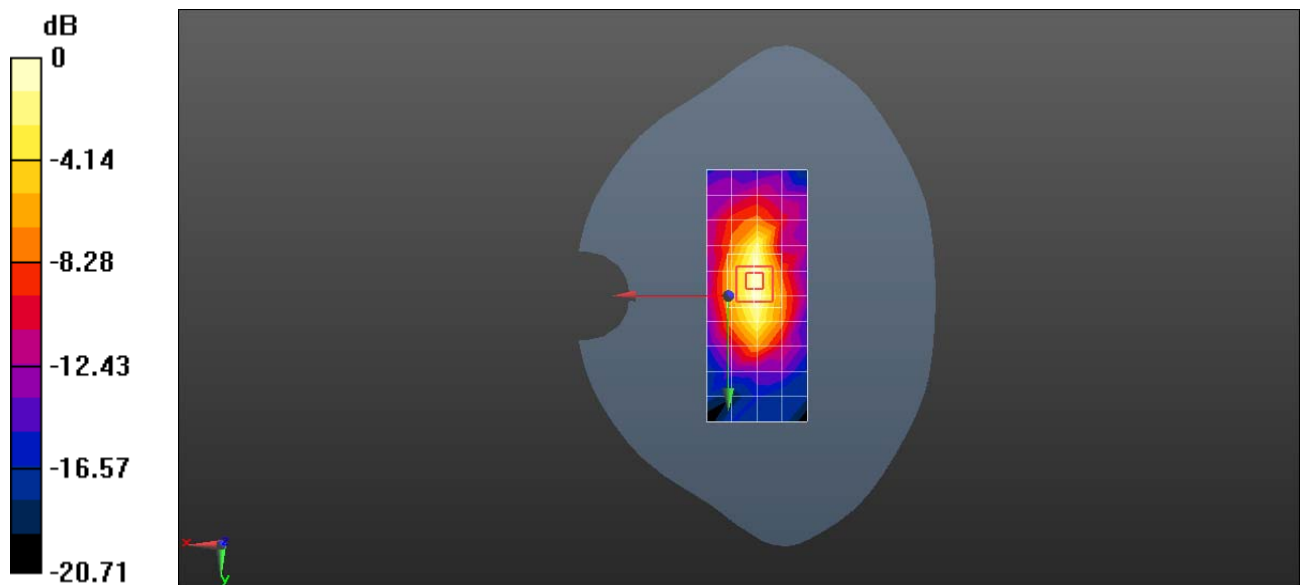

Test Laboratory: HUAWEI SAR/HAC Lab

MHA-L29 UMTS Band IV 1513CH Right touch-Second Antenna

DUT: MHA-L29; Type: Smart Phone; Serial: SAR2

Communication System: UID 0, HW-UMTS-FDD(WCDMA) (0); Frequency: 1752.6 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1753$ MHz; $\sigma = 1.35$ S/m; $\epsilon_r = 39.589$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY Configuration:

- ε Probe: EX3DV4 - SN3736; ConvF(8.3, 8.3, 8.3); Calibrated: 2017-4-27;
- ε Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- ε Electronics: DAE4 Sn852; Calibrated: 2017-4-27
- ε Phantom: SAM3; Type: SAM; Serial: TP-1597
- ε DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Head/Area Scan (9x14x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 1.53 W/kg


Configuration/Head/Zoom Scan (5x6x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 18.09 V/m; Power Drift = 0.04 dB

Peak SAR (extrapolated) = 2.03 W/kg

SAR(1 g) = 1.04 W/kg; SAR(10 g) = 0.590 W/kg

Maximum value of SAR (measured) = 1.48 W/kg

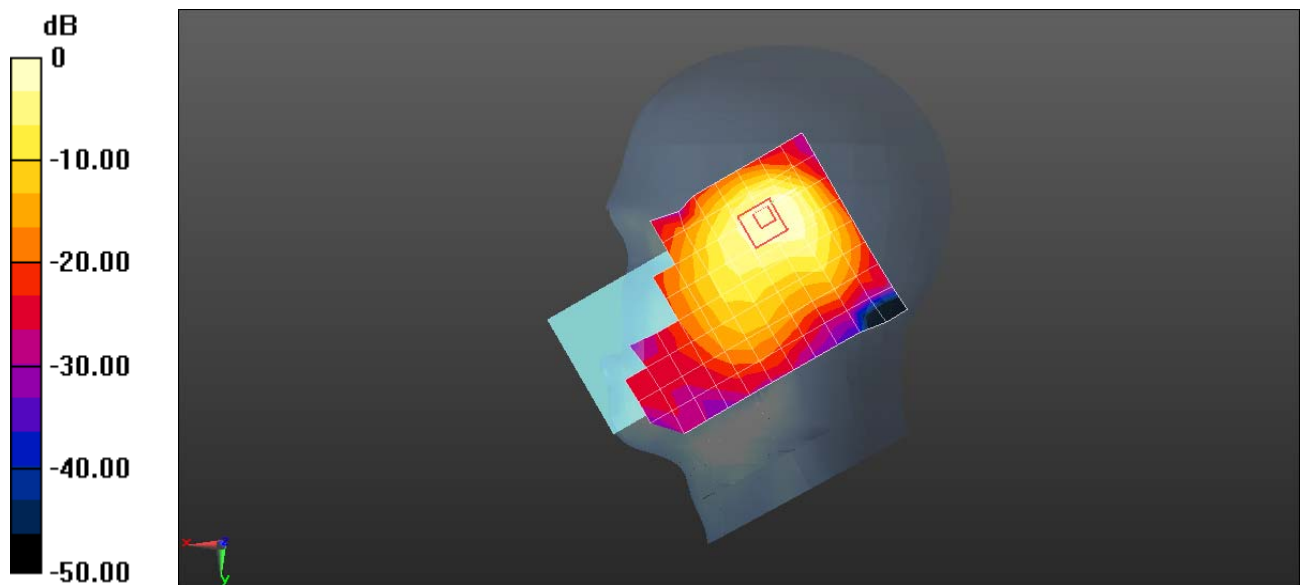

0 dB = 1.53 W/kg = 1.85 dBW/kg

Test Laboratory: HUAWEI SAR/HAC Lab

MHA-L29 UMTS Band IV 1413CH Front side 15mm-Second Antenna

DUT: MHA-L29; Type: Smart Phone; Serial: SAR2

Communication System: UID 0, HW-UMTS-FDD(WCDMA) (0); Frequency: 1732.6 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1733 \text{ MHz}$; $\sigma = 1.411 \text{ S/m}$; $\epsilon_r = 51.765$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY Configuration:

- ε Probe: EX3DV4 - SN3736; ConvF(7.8, 7.8, 7.8); Calibrated: 2017-4-27;
- ε Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- ε Electronics: DAE4 Sn852; Calibrated: 2017-4-27
- ε Phantom: SAM4; Type: SAM; Serial: TP-1620
- ε DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Body/Area Scan (9x14x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (measured) = 0.117 W/kg

Configuration/Body/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 4.028 V/m ; Power Drift = -0.19 dB

Peak SAR (extrapolated) = 0.142 W/kg

SAR(1 g) = 0.081 W/kg ; SAR(10 g) = 0.046 W/kg

Maximum value of SAR (measured) = 0.115 W/kg



Configuration/Body/Zoom Scan (5x5x7)/Cube 1: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 4.028 V/m ; Power Drift = -0.19 dB

Peak SAR (extrapolated) = 0.0960 W/kg

SAR(1 g) = 0.060 W/kg ; SAR(10 g) = 0.038 W/kg

Maximum value of SAR (measured) = 0.0822 W/kg

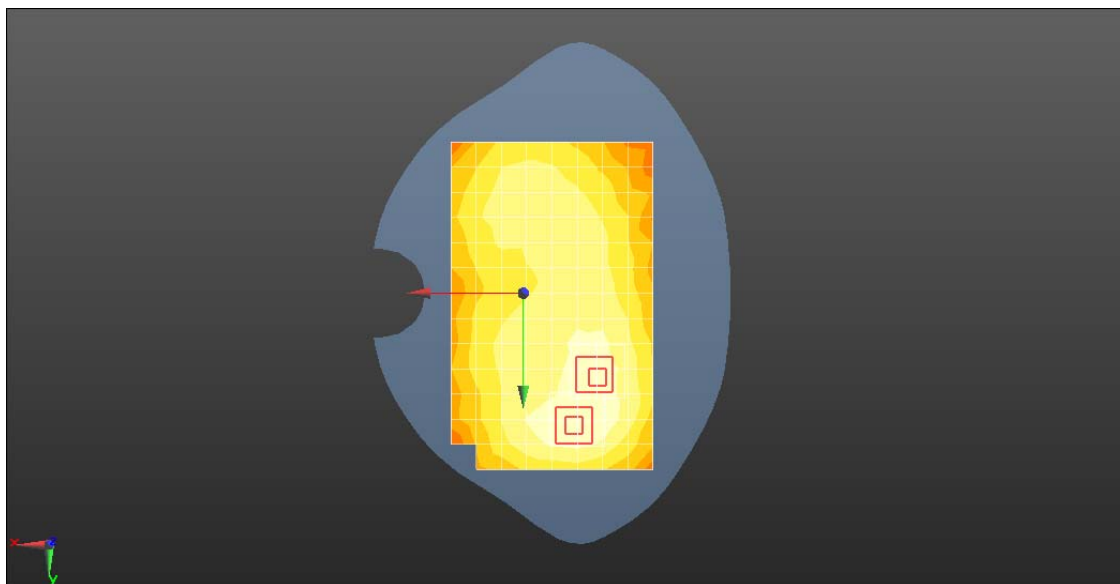

0 dB = 0.117 W/kg = -9.32 dBW/kg

Test Laboratory: HUAWEI SAR/HAC Lab

MHA-L29 UMTS Band IV 1413CH Top side 10mm-Second Antenna

DUT: MHA-L29; Type: Smart Phone; Serial: SAR2

Communication System: UID 0, HW-UMTS-FDD(WCDMA) (0); Frequency: 1732.6 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1733$ MHz; $\sigma = 1.411$ S/m; $\epsilon_r = 51.765$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- ε Probe: EX3DV4 - SN3736; ConvF(7.8, 7.8, 7.8); Calibrated: 2017-4-27;
- ε Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- ε Electronics: DAE4 Sn852; Calibrated: 2017-4-27
- ε Phantom: SAM4; Type: SAM; Serial: TP-1620
- ε DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Body/Area Scan (5x11x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 0.309 W/kg


Configuration/Body/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 12.18 V/m; Power Drift = -0.09 dB

Peak SAR (extrapolated) = 0.377 W/kg

SAR(1 g) = 0.206 W/kg; SAR(10 g) = 0.110 W/kg

Maximum value of SAR (measured) = 0.316 W/kg

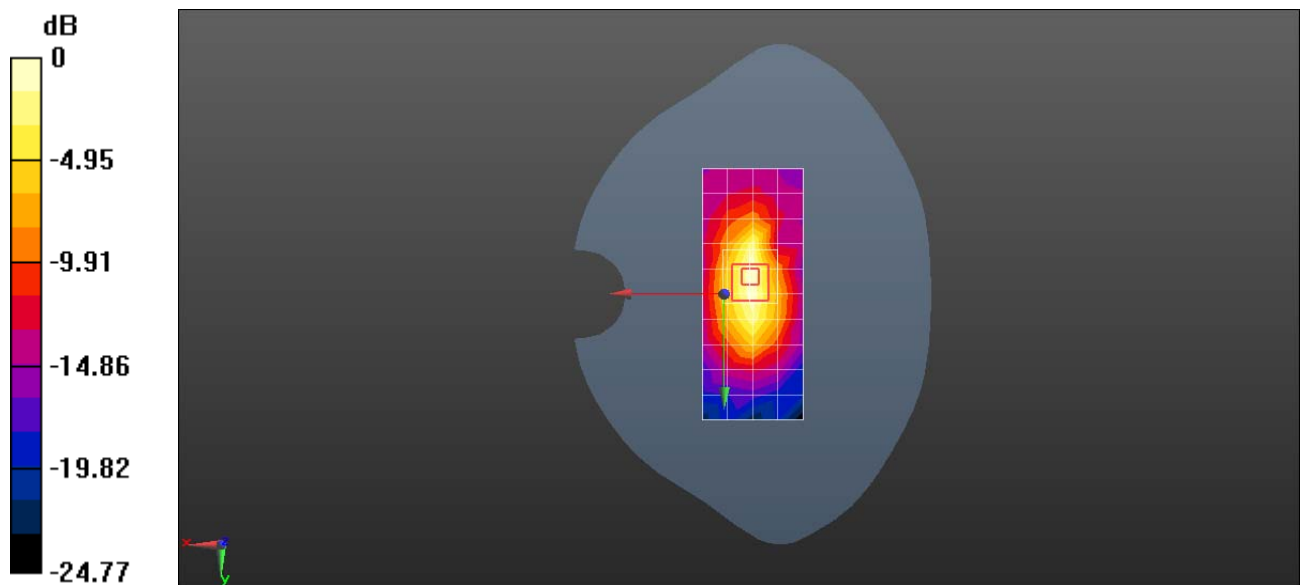

0 dB = 0.309 W/kg = -5.10 dBW/kg

Test Laboratory: HUAWEI SAR/HAC Lab

MHA-L29 UMTS Band V 4132CH Right touch-Second Antenna

DUT: MHA-L29; Type: Smart Phone; Serial: SAR2

Communication System: UID 0, HW-UMTS-FDD(WCDMA) (0); Frequency: 826.4 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 826.4$ MHz; $\sigma = 0.898$ S/m; $\epsilon_r = 41.911$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY Configuration:

- ε Probe: EX3DV4 - SN3736; ConvF(9.22, 9.22, 9.22); Calibrated: 2017-4-27;
- ε Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- ε Electronics: DAE4 Sn852; Calibrated: 2017-4-27
- ε Phantom: SAM3; Type: SAM; Serial: TP-1597
- ε DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Head/Area Scan (9x14x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 1.31 W/kg

Configuration/Head/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm


Reference Value = 20.64 V/m; Power Drift = 0.00 dB

Peak SAR (extrapolated) = 1.90 W/kg

SAR(1 g) = 0.824 W/kg; SAR(10 g) = 0.427 W/kg

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 1.46 W/kg

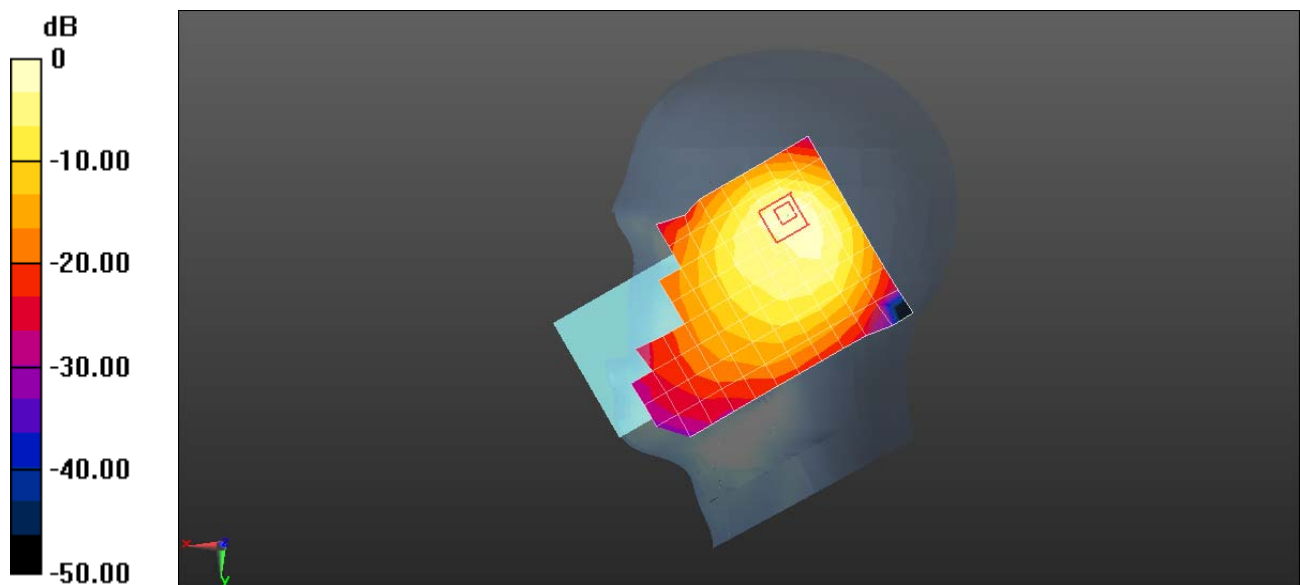

0 dB = 1.31 W/kg = 1.17 dBW/kg

Test Laboratory: HUAWEI SAR/HAC Lab

MHA-L29 UMTS Band V 4182CH Back side 15mm-Second Antenna

DUT: MHA-L29; Type: Smart Phone; Serial: SAR2

Communication System: UID 0, HW-UMTS-FDD(WCDMA) (0); Frequency: 836.4 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 836.4$ MHz; $\sigma = 0.952$ S/m; $\epsilon_r = 54.253$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- ε Probe: EX3DV4 - SN3736; ConvF(9.36, 9.36, 9.36); Calibrated: 2017-4-27;
- ε Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- ε Electronics: DAE4 Sn852; Calibrated: 2017-4-27
- ε Phantom: SAM4; Type: SAM; Serial: TP-1620
- ε DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Body/Area Scan (9x14x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.175 W/kg

Configuration/Body/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 8.053 V/m; Power Drift = -0.05 dB

Peak SAR (extrapolated) = 0.219 W/kg

SAR(1 g) = 0.135 W/kg; SAR(10 g) = 0.081 W/kg

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.188 W/kg

Configuration/Body/Zoom Scan (5x5x7)/Cube 1: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm


Reference Value = 8.053 V/m; Power Drift = -0.05 dB

Peak SAR (extrapolated) = 0.157 W/kg

SAR(1 g) = 0.113 W/kg; SAR(10 g) = 0.080 W/kg

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.139 W/kg

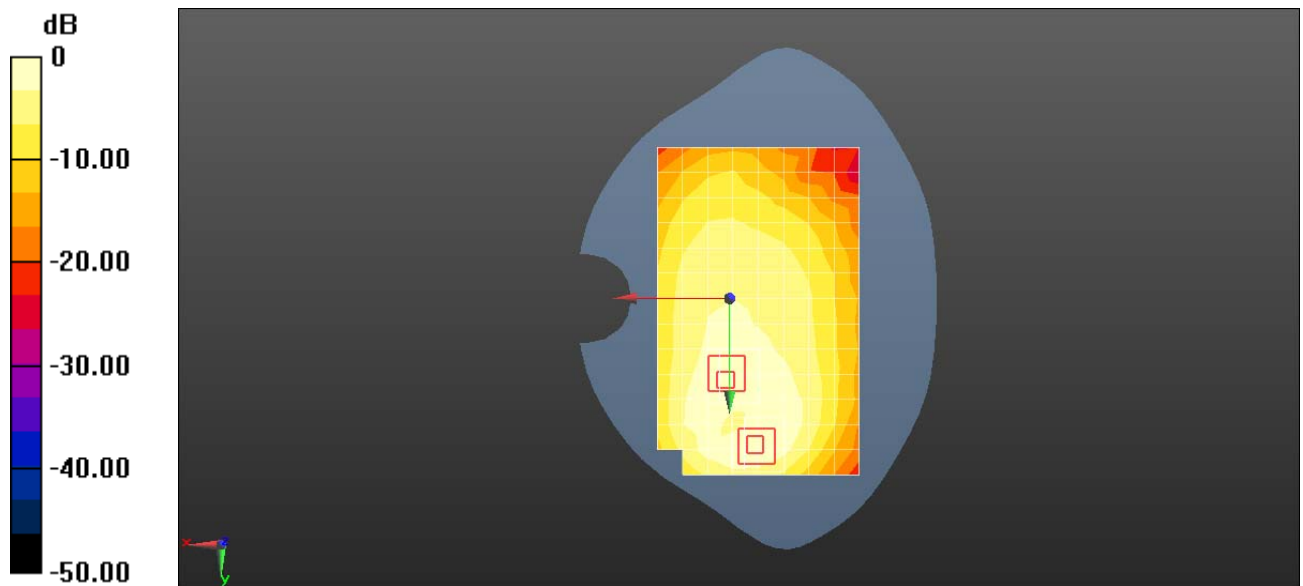

0 dB = 0.175 W/kg = -7.57 dBW/kg

Test Laboratory: HUAWEI SAR/HAC Lab

MHA-L29 UMTS Band V 4182CH Back side 10mm-Second Antenna

DUT: MHA-L29; Type: Smart Phone; Serial: SAR2

Communication System: UID 0, HW-UMTS-FDD(WCDMA) (0); Frequency: 836.4 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 836.4$ MHz; $\sigma = 0.952$ S/m; $\epsilon_r = 54.253$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- ε Probe: EX3DV4 - SN3736; ConvF(9.36, 9.36, 9.36); Calibrated: 2017-4-27;
- ε Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- ε Electronics: DAE4 Sn852; Calibrated: 2017-4-27
- ε Phantom: SAM4; Type: SAM; Serial: TP-1620
- ε DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Body/Area Scan (9x14x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.346 W/kg

Configuration/Body/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 8.692 V/m; Power Drift = 0.04 dB

Peak SAR (extrapolated) = 0.534 W/kg

SAR(1 g) = 0.302 W/kg; SAR(10 g) = 0.171 W/kg

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.438 W/kg

Configuration/Body/Zoom Scan (5x5x7)/Cube 1: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm


Reference Value = 8.692 V/m; Power Drift = 0.04 dB

Peak SAR (extrapolated) = 0.555 W/kg

SAR(1 g) = 0.277 W/kg; SAR(10 g) = 0.138 W/kg

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.436 W/kg

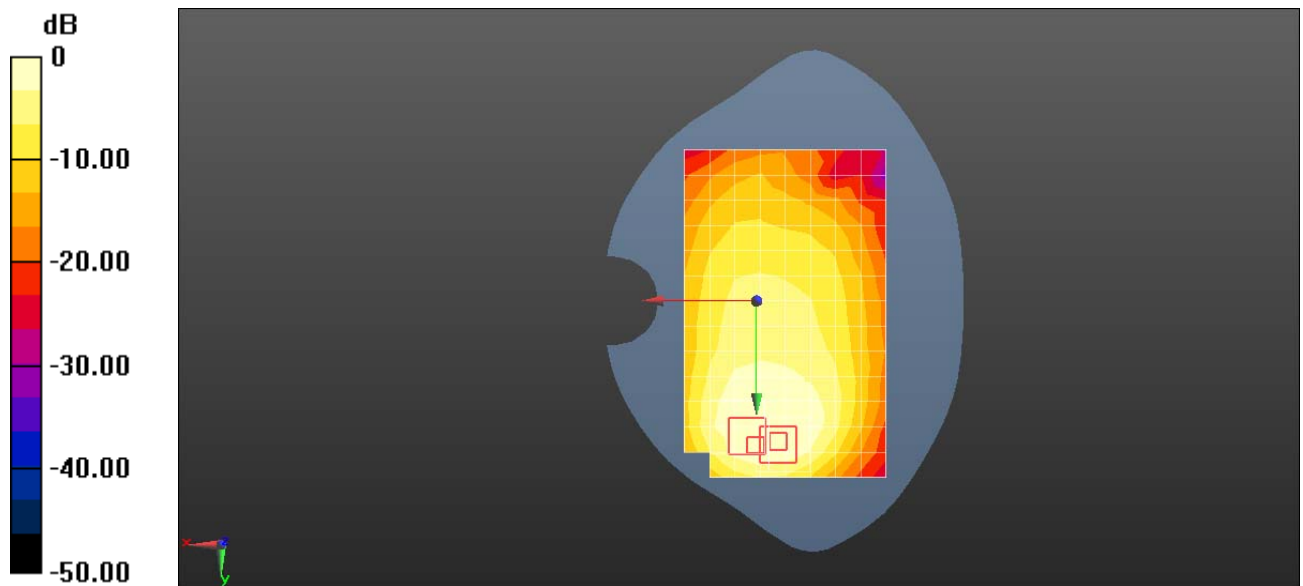

0 dB = 0.346 W/kg = -4.61 dBW/kg

Test Laboratory: HUAWEI SAR/HAC Lab

MHA-L29 LTE Band II 20M QPSK 1RB 50 offset 18900CH Right touch-Second Antenna

DUT: MHA-L29; Type: Smart Phone; Serial: SAR2

Communication System: UID 0, LTE-FDD (SC-FDMA, 20MHz, QPSK/16-QAM) (0); Frequency: 1880 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.388$ S/m; $\epsilon_r = 39.419$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY Configuration:

- ε Probe: EX3DV4 - SN3736; ConvF(7.73, 7.73, 7.73); Calibrated: 2017-4-27;
- ε Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- ε Electronics: DAE4 Sn852; Calibrated: 2017-4-27
- ε Phantom: SAM3; Type: SAM; Serial: TP-1597
- ε DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Head/Area Scan (9x14x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 0.825 W/kg


Configuration/Head/Zoom Scan (5x6x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 11.87 V/m; Power Drift = 0.04 dB

Peak SAR (extrapolated) = 1.17 W/kg

SAR(1 g) = 0.590 W/kg; SAR(10 g) = 0.324 W/kg

Maximum value of SAR (measured) = 0.880 W/kg

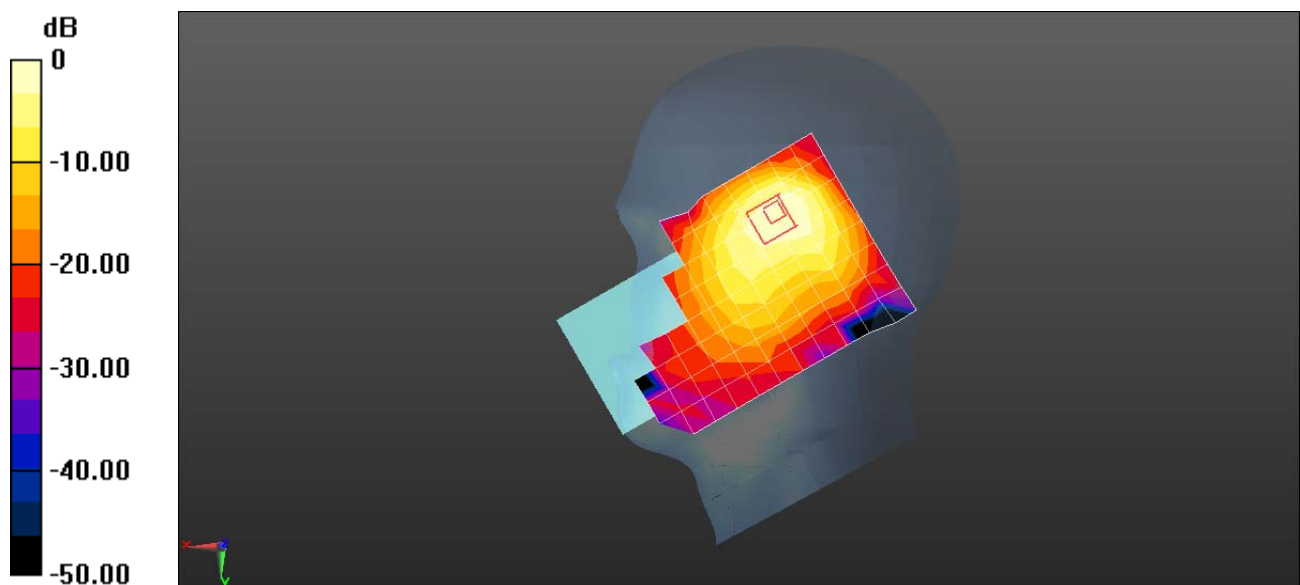

0 dB = 0.825 W/kg = -0.84 dBW/kg

Test Laboratory: HUAWEI SAR/HAC Lab

MHA-L29 LTE Band II 20M QPSK 1RB 50 offset 18900CH Front side 15mm-Second Antenna

DUT: MHA-L29; Type: Smart Phone; Serial: SAR2

Communication System: UID 0, LTE-FDD (SC-FDMA, 20MHz, QPSK/16-QAM) (0); Frequency: 1880 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1880 \text{ MHz}$; $\sigma = 1.54 \text{ S/m}$; $\epsilon_r = 52.486$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY Configuration:

- ε Probe: EX3DV4 - SN3736; ConvF(7.5, 7.5, 7.5); Calibrated: 2017-4-27;
- ε Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- ε Electronics: DAE4 Sn852; Calibrated: 2017-4-27
- ε Phantom: SAM4; Type: SAM; Serial: TP-1620
- ε DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Body/Area Scan (9x14x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (measured) = 0.118 W/kg

Configuration/Body/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 3.467 V/m ; Power Drift = 0.12 dB

Peak SAR (extrapolated) = 0.140 W/kg

SAR(1 g) = 0.087 W/kg ; SAR(10 g) = 0.055 W/kg

Maximum value of SAR (measured) = 0.120 W/kg



Configuration/Body/Zoom Scan (5x5x7)/Cube 1: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 3.467 V/m ; Power Drift = 0.12 dB

Peak SAR (extrapolated) = 0.123 W/kg

SAR(1 g) = 0.067 W/kg ; SAR(10 g) = 0.036 W/kg

Maximum value of SAR (measured) = 0.102 W/kg

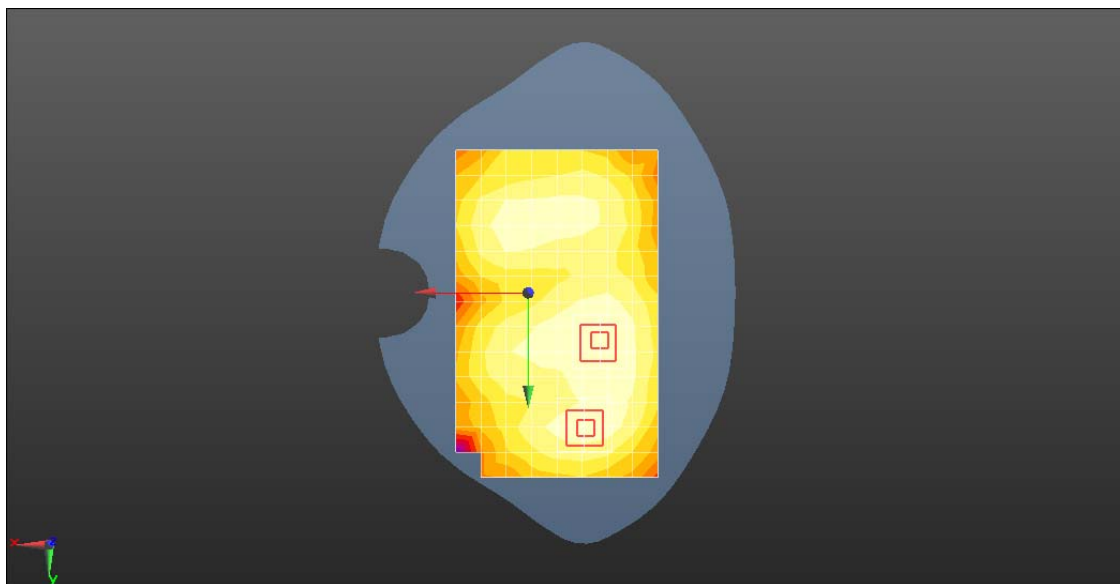

0 dB = 0.118 W/kg = -9.28 dBW/kg

Test Laboratory: HUAWEI SAR/HAC Lab

MHA-L29 LTE Band II 20M QPSK 1RB 50 offset 18900CH Top side 10mm-Second Antenna

DUT: MHA-L29; Type: Smart Phone; Serial: SAR2

Communication System: UID 0, LTE-FDD (SC-FDMA, 20MHz, QPSK/16-QAM) (0); Frequency: 1880 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.54$ S/m; $\epsilon_r = 52.486$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- ε Probe: EX3DV4 - SN3736; ConvF(7.5, 7.5, 7.5); Calibrated: 2017-4-27;
- ε Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- ε Electronics: DAE4 Sn852; Calibrated: 2017-4-27
- ε Phantom: SAM4; Type: SAM; Serial: TP-1620
- ε DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Body/Area Scan (5x11x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 0.371 W/kg


Configuration/Body/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 12.18 V/m; Power Drift = -0.13 dB

Peak SAR (extrapolated) = 0.448 W/kg

SAR(1 g) = 0.241 W/kg; SAR(10 g) = 0.126 W/kg

Maximum value of SAR (measured) = 0.370 W/kg

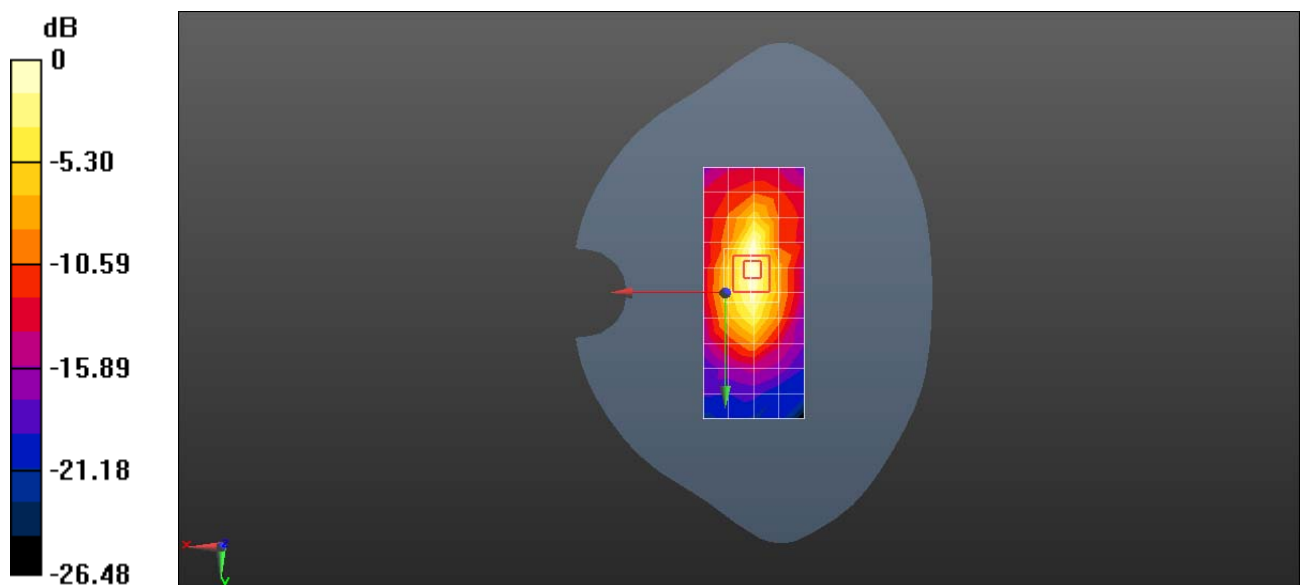

0 dB = 0.371 W/kg = -4.31 dBW/kg

Test Laboratory: HUAWEI SAR/HAC Lab

MHA-L29 LTE Band IV 20M QPSK 1RB 50 offset 20050CH Right touch -Second Antenna

DUT: MHA-L29; Type: Smart Phone; Serial: SAR1

Communication System: UID 0, LTE-FDD (SC-FDMA, 20MHz, QPSK/16-QAM) (0); Frequency: 1720 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1720$ MHz; $\sigma = 1.354$ S/m; $\epsilon_r = 40.116$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY Configuration:

- ε Probe: EX3DV4 - SN3578; ConvF(8.37, 8.37, 8.37); Calibrated: 2017-5-5;
- ε Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- ε Electronics: DAE4 Sn1236; Calibrated: 2017-7-21
- ε Phantom: SAM1; Type: SAM; Serial: TP-1475
- ε DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Head/Area Scan (9x14x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 1.52 W/kg


Configuration/Head/Zoom Scan (6x6x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 22.50 V/m; Power Drift = -0.14 dB

Peak SAR (extrapolated) = 2.22 W/kg

SAR(1 g) = 0.996 W/kg; SAR(10 g) = 0.575 W/kg

Maximum value of SAR (measured) = 1.57 W/kg

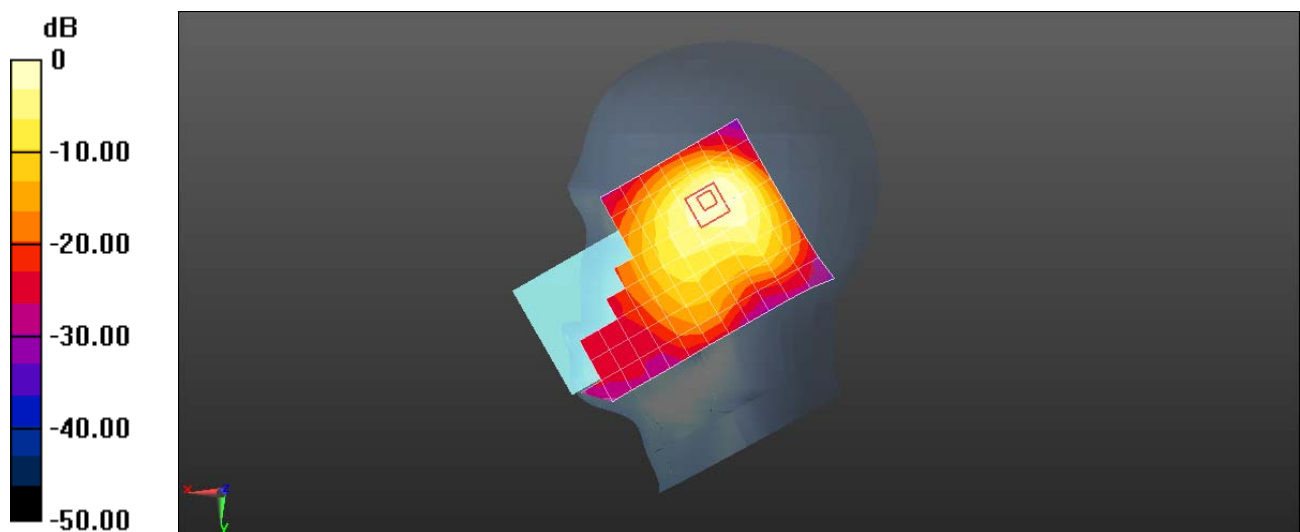

0 dB = 1.52 W/kg = 1.82 dBW/kg

Test Laboratory: HUAWEI SAR/HAC Lab

MHA-L29 LTE Band IV 20M QPSK 1RB 0 offset 20175CH Front Side 15mm with Battery2-Second Antenna

DUT: MHA-L29; Type: Smart Phone; Serial: SAR1

Communication System: UID 0, LTE-FDD (SC-FDMA, 20MHz, QPSK/16-QAM) (0); Frequency: 1732.5 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 1732.5$ MHz; $\sigma = 1.493$ S/m; $\epsilon_r = 52.288$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- ε Probe: ES3DV3 - SN3168; ConvF(5.22, 5.22, 5.22); Calibrated: 2016-9-27;
- ε Sensor-Surface: 3mm (Mechanical Surface Detection), $z = 2.0, 32.0$
- ε Electronics: DAE4 Sn851; Calibrated: 2016-7-22
- ε Phantom: SAM2; Type: SAM; Serial: TP:1474
- ε DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Body/Area Scan (9x14x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.111 W/kg

Configuration/Body/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 4.847 V/m; Power Drift = 0.17 dB

Peak SAR (extrapolated) = 0.171 W/kg

SAR(1 g) = 0.103 W/kg; SAR(10 g) = 0.059 W/kg

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.126 W/kg

Configuration/Body/Zoom Scan (5x5x7)/Cube 1: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm


Reference Value = 4.847 V/m; Power Drift = 0.17 dB

Peak SAR (extrapolated) = 0.131 W/kg

SAR(1 g) = 0.073 W/kg; SAR(10 g) = 0.047 W/kg

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.0960 W/kg

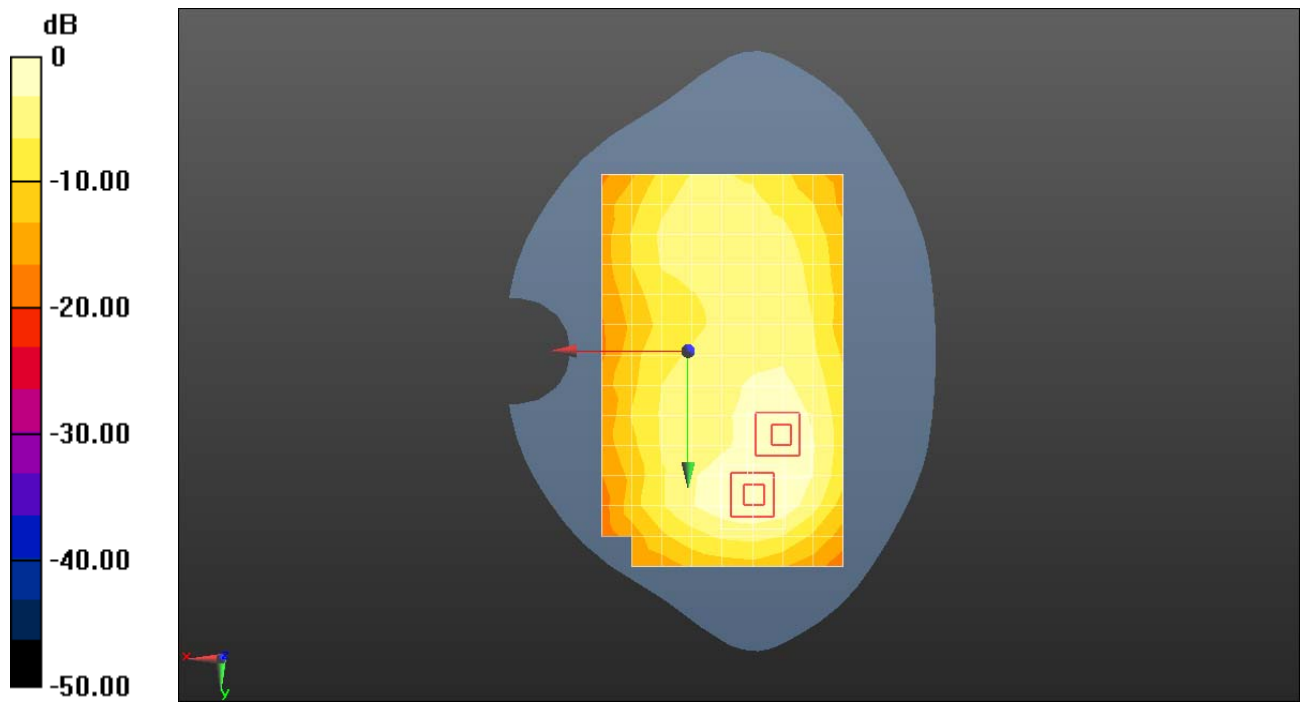

0 dB = 0.111 W/kg = -9.55 dBW/kg

Test Laboratory: HUAWEI SAR/HAC Lab

MHA-L29 LTE Band IV 20M QPSK 1RB 0 offset 20175CH Top Side 10mm-Second Antenna

DUT: MHA-L29; Type: Smart Phone; Serial: SAR1

Communication System: UID 0, LTE-FDD (SC-FDMA, 20MHz, QPSK/16-QAM) (0); Frequency: 1732.5 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 1732.5$ MHz; $\sigma = 1.493$ S/m; $\epsilon_r = 52.288$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- ε Probe: ES3DV3 - SN3168; ConvF(5.22, 5.22, 5.22); Calibrated: 2016-9-27;
- ε Sensor-Surface: 3mm (Mechanical Surface Detection), $z = 2.0, 32.0$
- ε Electronics: DAE4 Sn851; Calibrated: 2016-7-22
- ε Phantom: SAM2; Type: SAM; Serial: TP:1474
- ε DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Body/Area Scan (6x9x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.276 W/kg

Configuration/Body/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm


Reference Value = 16.30 V/m; Power Drift = -0.05 dB

Peak SAR (extrapolated) = 0.570 W/kg

SAR(1 g) = 0.314 W/kg; SAR(10 g) = 0.164 W/kg

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.399 W/kg

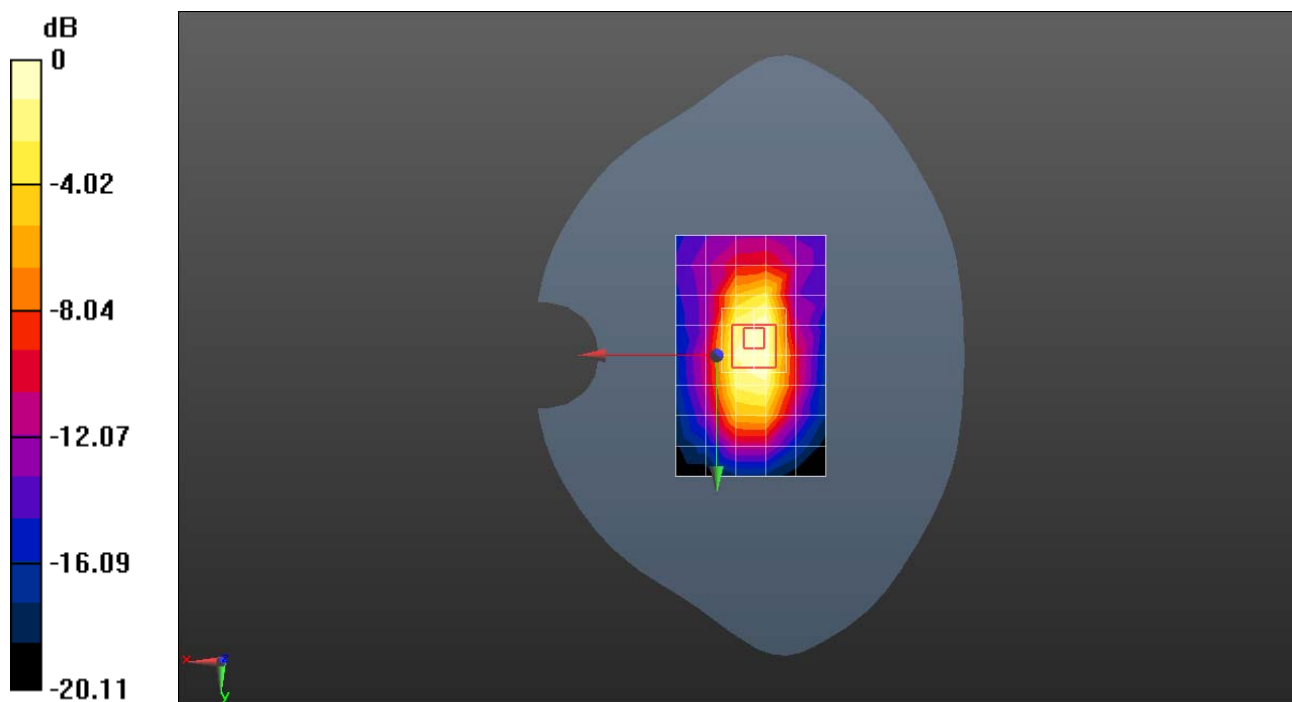

0 dB = 0.276 W/kg = -5.59 dBW/kg

Test Laboratory: HUAWEI SAR/HAC Lab

MHA-L29 LTE Band V 10M QPSK 1RB 25 offset 20600CH Right touch-Second Antenna

DUT: MHA-L29; Type: Smart Phone; Serial: SAR2

Communication System: UID 0, LTE-FDD (SC-FDMA, 10MHz, QPSK/16-QAM) (0); Frequency: 844 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 844 \text{ MHz}$; $\sigma = 0.904 \text{ S/m}$; $\epsilon_r = 41.826$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Right Section

DASY Configuration:

- ε Probe: EX3DV4 - SN3736; ConvF(9.22, 9.22, 9.22); Calibrated: 2017-4-27;
- ε Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- ε Electronics: DAE4 Sn852; Calibrated: 2017-4-27
- ε Phantom: SAM3; Type: SAM; Serial: TP-1597
- ε DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Head/Area Scan (9x14x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (measured) = 1.69 W/kg


Configuration/Head/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 23.05 V/m ; Power Drift = -0.12 dB

Peak SAR (extrapolated) = 2.32 W/kg

SAR(1 g) = 1.01 W/kg ; SAR(10 g) = 0.538 W/kg

Maximum value of SAR (measured) = 1.80 W/kg

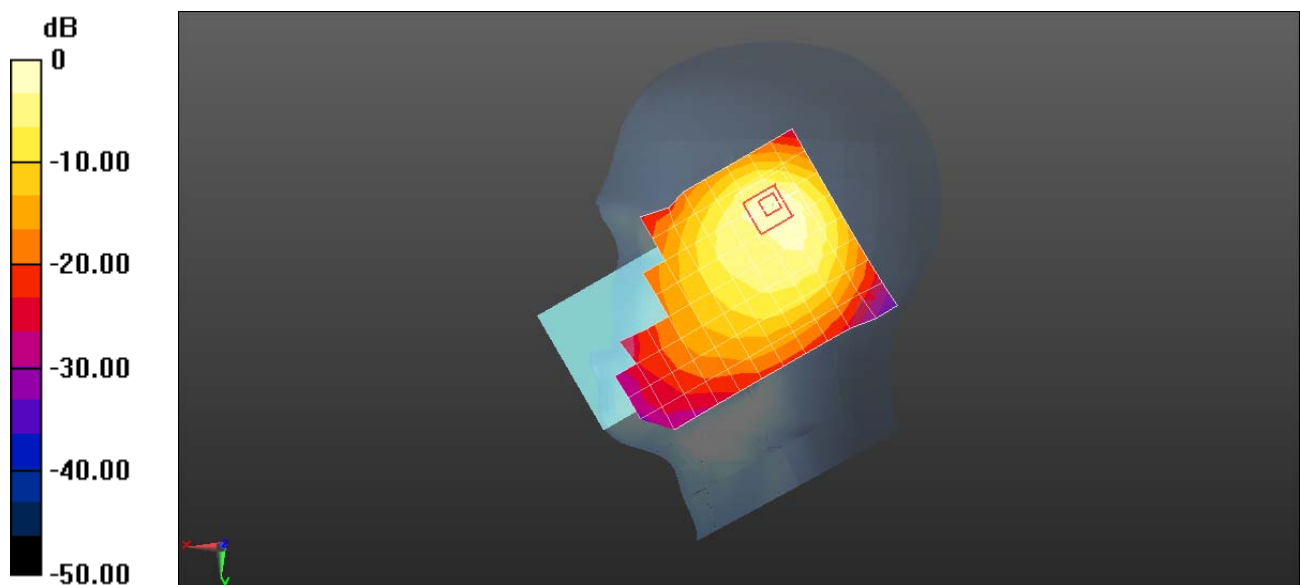

0 dB = 1.69 W/kg = 2.28 dBW/kg

Test Laboratory: HUAWEI SAR/HAC Lab

MHA-L29 LTE Band V 10M QPSK 1RB 25 offset 20600CH Back side 15mm-Second Antenna

DUT: MHA-L29; Type: Smart Phone; Serial: SAR2

Communication System: UID 0, LTE-FDD (SC-FDMA, 10MHz, QPSK/16-QAM) (0); Frequency: 844 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 844 \text{ MHz}$; $\sigma = 0.955 \text{ S/m}$; $\epsilon_r = 54.218$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY Configuration:

- ε Probe: EX3DV4 - SN3736; ConvF(9.36, 9.36, 9.36); Calibrated: 2017-4-27;
- ε Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- ε Electronics: DAE4 Sn852; Calibrated: 2017-4-27
- ε Phantom: SAM4; Type: SAM; Serial: TP-1620
- ε DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Body/Area Scan (9x14x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (measured) = 0.252 W/kg


Configuration/Body/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 11.67 V/m ; Power Drift = -0.03 dB

Peak SAR (extrapolated) = 0.305 W/kg

SAR(1 g) = 0.188 W/kg ; SAR(10 g) = 0.113 W/kg

Maximum value of SAR (measured) = 0.264 W/kg

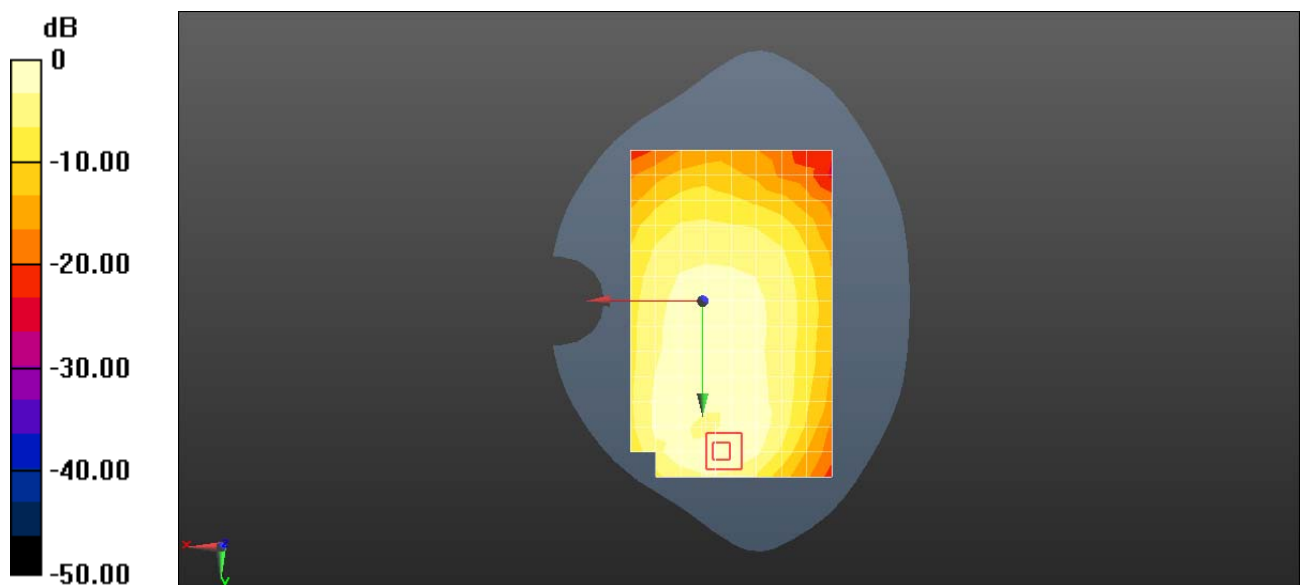

0 dB = 0.252 W/kg = -5.99 dBW/kg

Test Laboratory: HUAWEI SAR/HAC Lab

MHA-L29 LTE Band V 10M QPSK 1RB 25 offset 20600CH Top side 10mm-Second Antenna

DUT: MHA-L29; Type: Smart Phone; Serial: SAR2

Communication System: UID 0, LTE-FDD (SC-FDMA, 10MHz, QPSK/16-QAM) (0); Frequency: 844 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 844 \text{ MHz}$; $\sigma = 0.955 \text{ S/m}$; $\epsilon_r = 54.218$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY Configuration:

- ε Probe: EX3DV4 - SN3736; ConvF(9.36, 9.36, 9.36); Calibrated: 2017-4-27;
- ε Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- ε Electronics: DAE4 Sn852; Calibrated: 2017-4-27
- ε Phantom: SAM4; Type: SAM; Serial: TP-1620
- ε DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Body/Area Scan (5x11x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (measured) = 0.544 W/kg


Configuration/Body/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 18.04 V/m ; Power Drift = -0.09 dB

Peak SAR (extrapolated) = 0.715 W/kg

SAR(1 g) = 0.363 W/kg ; SAR(10 g) = 0.181 W/kg

Maximum value of SAR (measured) = 0.573 W/kg

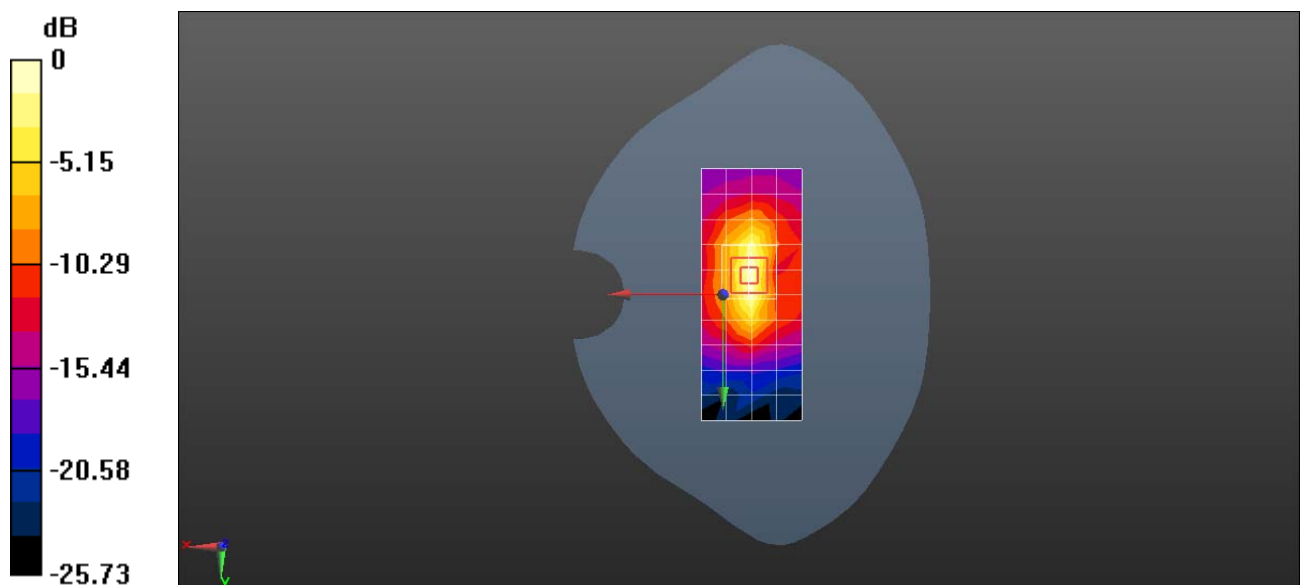

0 dB = 0.544 W/kg = -2.64 dBW/kg

Test Laboratory: HUAWEI SAR/HAC Lab

MHA-L29 LTE Band VII 20M QPSK 50RB 25 offset 21100CH Right tilt-Second Antenna

DUT: MHA-L29; Type: Smart Phone; Serial: SAR1

Communication System: UID 0, LTE-FDD (SC-FDMA, 20MHz, QPSK/16-QAM) (0); Frequency: 2535 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 2535$ MHz; $\sigma = 1.915$ S/m; $\epsilon_r = 38.34$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY Configuration:

- ε Probe: EX3DV4 - SN3578; ConvF(7.44, 7.44, 7.44); Calibrated: 2017-5-5;
- ε Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- ε Electronics: DAE4 Sn918; Calibrated: 2017-6-26
- ε Phantom: SAM1; Type: SAM; Serial: TP-1475
- ε DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Head/Area Scan (10x17x1): Measurement grid: $dx=12$ mm, $dy=12$ mm

Maximum value of SAR (measured) = 1.16 W/kg


Configuration/Head/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 7.780 V/m; Power Drift = 0.19 dB

Peak SAR (extrapolated) = 1.71 W/kg

SAR(1 g) = 0.649 W/kg; SAR(10 g) = 0.277 W/kg

Maximum value of SAR (measured) = 1.30 W/kg

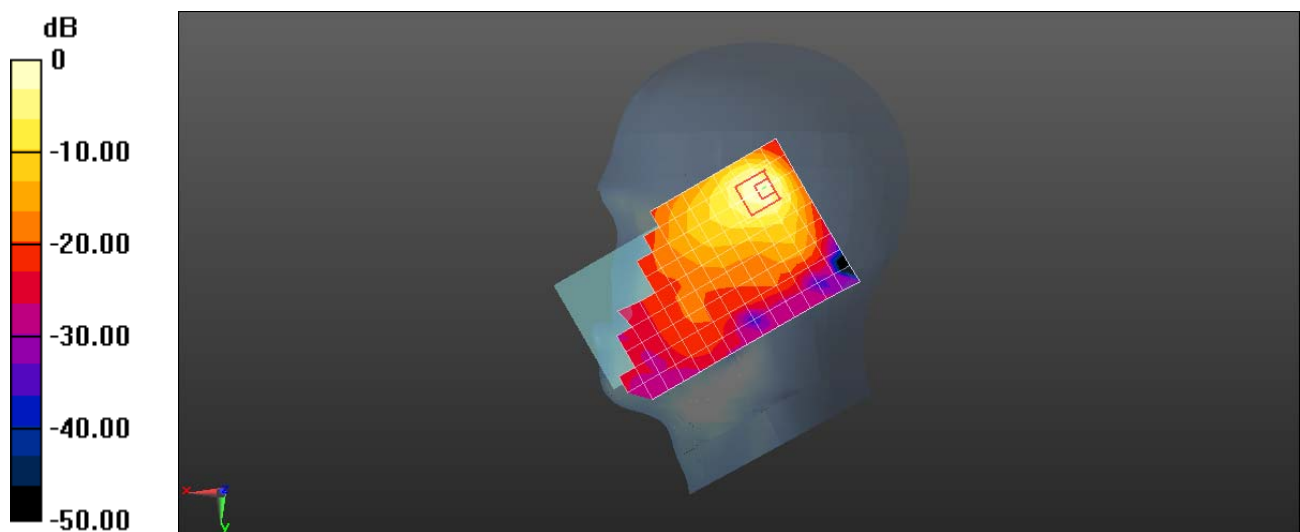

0 dB = 1.16 W/kg = 0.64 dBW/kg

Test Laboratory: HUAWEI SAR/HAC Lab

MHA-L29 LTE Band VII 20M QPSK 1RB 99 offset 21100CH Front side 15mm-Second Antenna

DUT: MHA-L29; Type: Smart Phone; Serial: SAR2

Communication System: UID 0, LTE-FDD (SC-FDMA, 20MHz, QPSK/16-QAM) (0); Frequency: 2535 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 2535$ MHz; $\sigma = 2.119$ S/m; $\epsilon_r = 50.687$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- ε Probe: EX3DV4 - SN3736; ConvF(6.96, 6.96, 6.96); Calibrated: 2017-4-27;
- ε Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- ε Electronics: DAE4 Sn852; Calibrated: 2017-4-27
- ε Phantom: SAM4; Type: SAM; Serial: TP-1620
- ε DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Body/Area Scan (11x18x1): Measurement grid: $dx=12$ mm, $dy=12$ mm

Maximum value of SAR (measured) = 0.0860 W/kg


Configuration/Body/Zoom Scan (7x8x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 3.076 V/m; Power Drift = -0.17 dB

Peak SAR (extrapolated) = 0.113 W/kg

SAR(1 g) = 0.056 W/kg; SAR(10 g) = 0.030 W/kg

Maximum value of SAR (measured) = 0.0899 W/kg

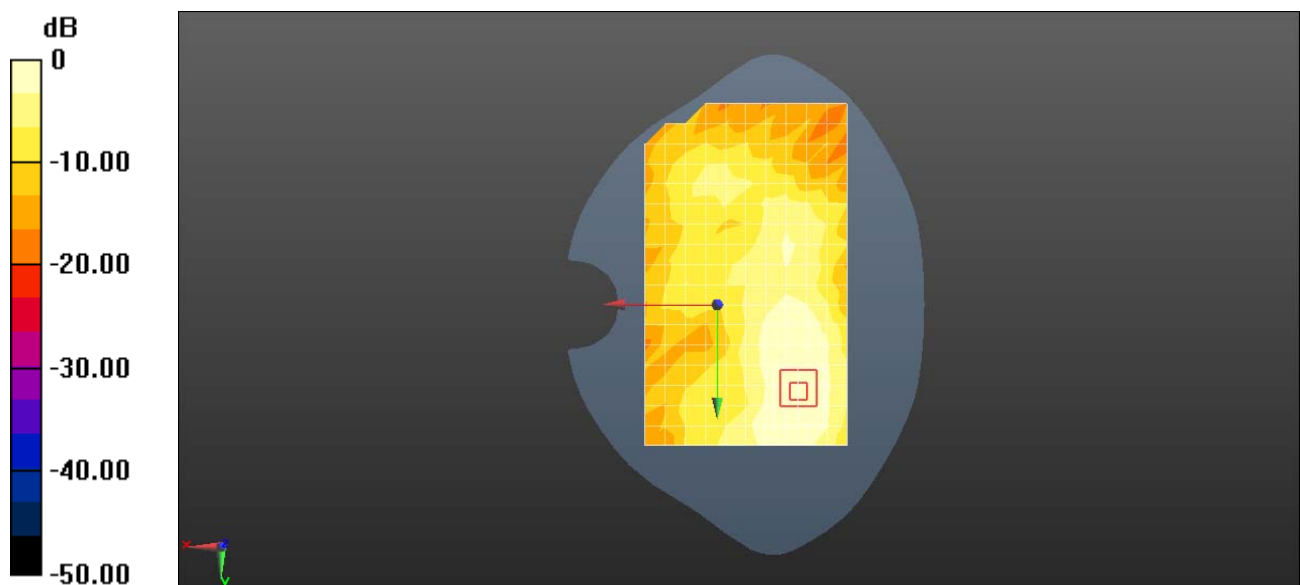

0 dB = 0.0860 W/kg = -10.66 dBW/kg

Test Laboratory: HUAWEI SAR/HAC Lab

MHA-L29 LTE Band VII 20M QPSK 1RB 99 offset 21100CH Left side 10mm with Battery2-Second Antenna

DUT: MHA-L29; Type: Smart Phone; Serial: SAR1

Communication System: UID 0, LTE-FDD (SC-FDMA, 20MHz, QPSK/16-QAM) (0); Frequency: 2535 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 2535 \text{ MHz}$; $\sigma = 2.066 \text{ S/m}$; $\epsilon_r = 50.607$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY Configuration:

- ε Probe: EX3DV4 - SN3578; ConvF(7.43, 7.43, 7.43); Calibrated: 2017-5-5;
- ε Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- ε Electronics: DAE4 Sn918; Calibrated: 2017-6-26
- ε Phantom: SAM2; Type: SAM; Serial: TP:1474
- ε DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Body/Area Scan (7x17x1): Measurement grid: $dx=12\text{mm}$, $dy=12\text{mm}$

Maximum value of SAR (measured) = 0.198 W/kg

Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$

Reference Value = 8.187 V/m ; Power Drift = -0.15 dB

Peak SAR (extrapolated) = 0.268 W/kg

SAR(1 g) = 0.144 W/kg ; SAR(10 g) = 0.075 W/kg

Maximum value of SAR (measured) = 0.223 W/kg



Configuration/Body/Zoom Scan (7x7x7)/Cube 1: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$

Reference Value = 8.187 V/m ; Power Drift = -0.15 dB

Peak SAR (extrapolated) = 0.207 W/kg

SAR(1 g) = 0.108 W/kg ; SAR(10 g) = 0.056 W/kg

Maximum value of SAR (measured) = 0.171 W/kg

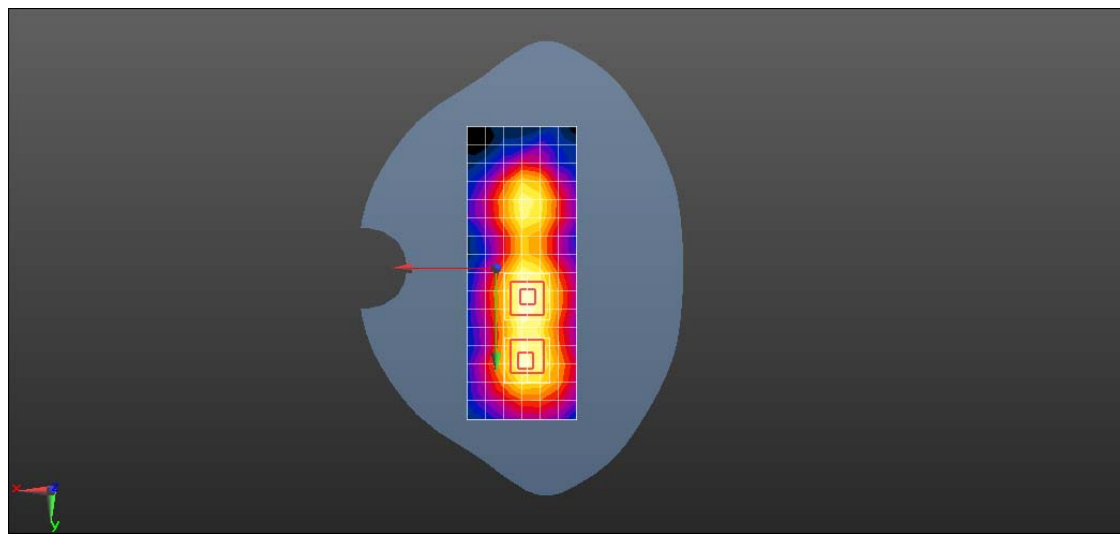

0 dB = 0.198 W/kg = -7.03 dBW/kg

Test Laboratory: HUAWEI SAR/HAC Lab

MHA-L29 LTE Band XII 10M QPSK 1RB 25 offset 23060CH Right touch-Second Antenna

DUT: MHA-L29; Type: Smart Phone; Serial: SAR1

Communication System: UID 0, LTE-FDD (SC-FDMA, 10MHz, QPSK/16-QAM) (0); Frequency: 704 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 704 \text{ MHz}$; $\sigma = 0.908 \text{ S/m}$; $\epsilon_r = 42.526$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Right Section

DASY Configuration:

- ε Probe: ES3DV3 - SN3168; ConvF(6.93, 6.93, 6.93); Calibrated: 2016-9-27;
- ε Sensor-Surface: 3mm (Mechanical Surface Detection), $z = 2.0, 32.0$
- ε Electronics: DAE4 Sn851; Calibrated: 2016-7-22
- ε Phantom: SAM1; Type: SAM; Serial: TP-1475
- ε DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Head/Area Scan (10x17x1): Measurement grid: $dx=12\text{mm}$, $dy=12\text{mm}$

Maximum value of SAR (measured) = 0.964 W/kg


Configuration/Head/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$

Reference Value = 19.37 V/m ; Power Drift = -0.04 dB

Peak SAR (extrapolated) = 2.07 W/kg

SAR(1 g) = 0.854 W/kg ; SAR(10 g) = 0.443 W/kg

Maximum value of SAR (measured) = 1.11 W/kg

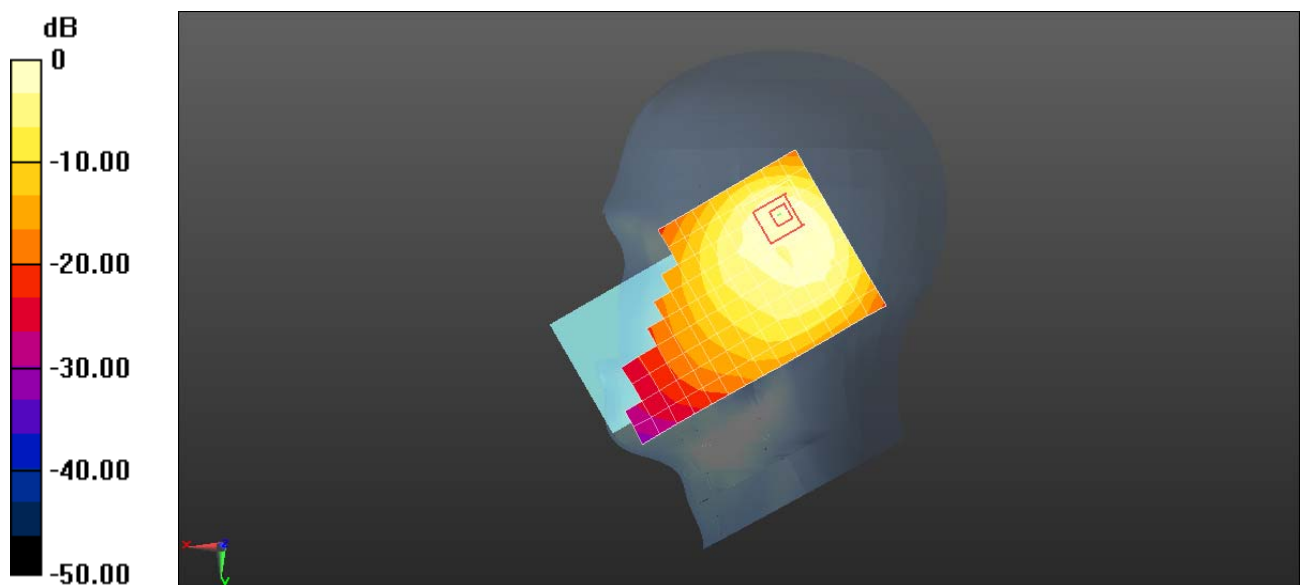

0 dB = 0.964 W/kg = -0.16 dBW/kg

Test Laboratory: HUAWEI SAR/HAC Lab

MHA-L29 LTE Band XII 10M QPSK 25RB 13 offset 23130CH Back Side 15mm-Second Antenna

DUT: MHA-L29; Type: Smart Phone; Serial: SAR1

Communication System: UID 0, LTE-FDD (SC-FDMA, 10MHz, QPSK/16-QAM) (0); Frequency: 711 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 711 \text{ MHz}$; $\sigma = 0.956 \text{ S/m}$; $\epsilon_r = 56.154$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY Configuration:

- ε Probe: ES3DV3 - SN3168; ConvF(6.45, 6.45, 6.45); Calibrated: 2016-9-27;
- ε Sensor-Surface: 3mm (Mechanical Surface Detection), $z = 2.0, 32.0$
- ε Electronics: DAE4 Sn851; Calibrated: 2016-7-22
- ε Phantom: SAM2; Type: SAM; Serial: TP:1474
- ε DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Body/Area Scan (9x15x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (measured) = 0.0695 W/kg


Configuration/Body/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 5.547 V/m ; Power Drift = 0.02 dB

Peak SAR (extrapolated) = 0.0970 W/kg

SAR(1 g) = 0.059 W/kg ; SAR(10 g) = 0.035 W/kg

Maximum value of SAR (measured) = 0.0694 W/kg

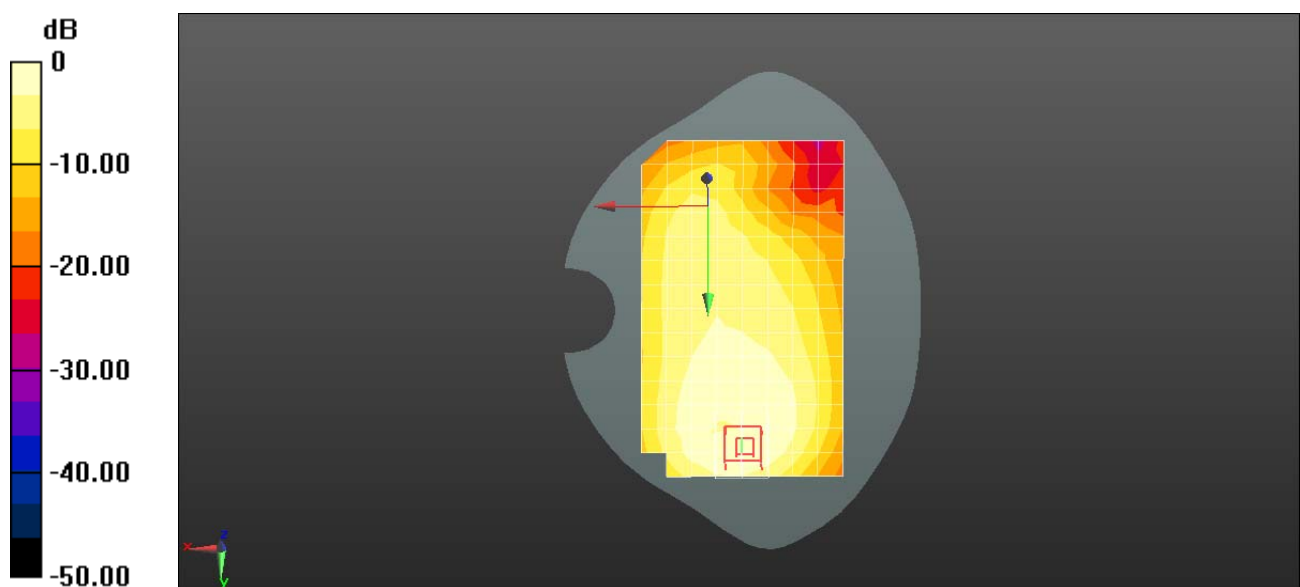

Test Laboratory: HUAWEI SAR/HAC Lab

MHA-L29 LTE Band XII 10M QPSK 25RB 13 offset 23130CH Back Side 10mm-Second Antenna

DUT: MHA-L29; Type: Smart Phone; Serial: SAR1

Communication System: UID 0, LTE-FDD (SC-FDMA, 10MHz, QPSK/16-QAM) (0); Frequency: 711 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 711 \text{ MHz}$; $\sigma = 0.956 \text{ S/m}$; $\epsilon_r = 56.154$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY Configuration:

- ε Probe: ES3DV3 - SN3168; ConvF(6.45, 6.45, 6.45); Calibrated: 2016-9-27;
- ε Sensor-Surface: 3mm (Mechanical Surface Detection), $z = 2.0, 32.0$
- ε Electronics: DAE4 Sn851; Calibrated: 2016-7-22
- ε Phantom: SAM2; Type: SAM; Serial: TP:1474
- ε DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Body/Area Scan (9x15x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (measured) = 0.243 W/kg


Configuration/Body/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 7.816 V/m ; Power Drift = -0.07 dB

Peak SAR (extrapolated) = 0.430 W/kg

SAR(1 g) = 0.235 W/kg ; SAR(10 g) = 0.133 W/kg

Maximum value of SAR (measured) = 0.273 W/kg

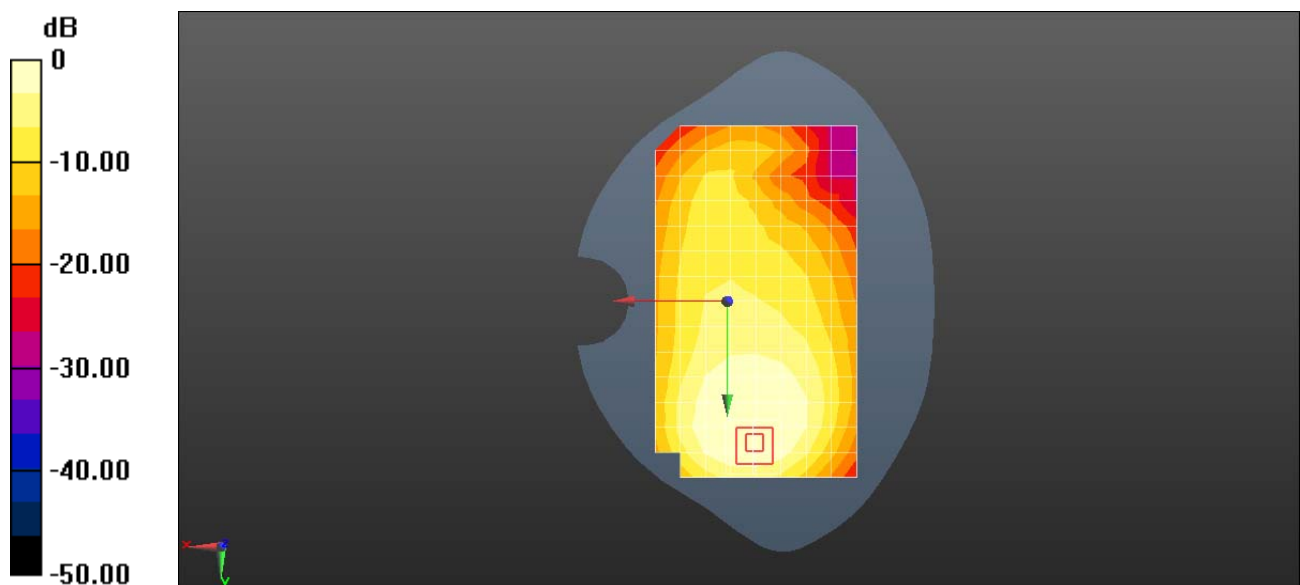

Test Laboratory: HUAWEI SAR/HAC Lab

MHA-L29 LTE Band XVII 10M QPSK 1RB 25 offset 23790CH Right touch-Second Antenna

DUT: MHA-L29; Type: Smart Phone; Serial: SAR1

Communication System: UID 0, LTE-FDD (SC-FDMA, 10MHz, QPSK/16-QAM) (0); Frequency: 710 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 710 \text{ MHz}$; $\sigma = 0.91 \text{ S/m}$; $\epsilon_r = 42.514$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Right Section

DASY Configuration:

- ε Probe: ES3DV3 - SN3168; ConvF(6.93, 6.93, 6.93); Calibrated: 2016-9-27;
- ε Sensor-Surface: 3mm (Mechanical Surface Detection), $z = 2.0, 32.0$
- ε Electronics: DAE4 Sn851; Calibrated: 2016-7-22
- ε Phantom: SAM1; Type: SAM; Serial: TP-1475
- ε DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Head/Area Scan (10x17x1): Measurement grid: $dx=12\text{mm}$, $dy=12\text{mm}$

Maximum value of SAR (measured) = 0.954 W/kg


Configuration/Head/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$

Reference Value = 19.43 V/m ; Power Drift = -0.01 dB

Peak SAR (extrapolated) = 2.07 W/kg

SAR(1 g) = 0.853 W/kg ; SAR(10 g) = 0.442 W/kg

Maximum value of SAR (measured) = 1.11 W/kg

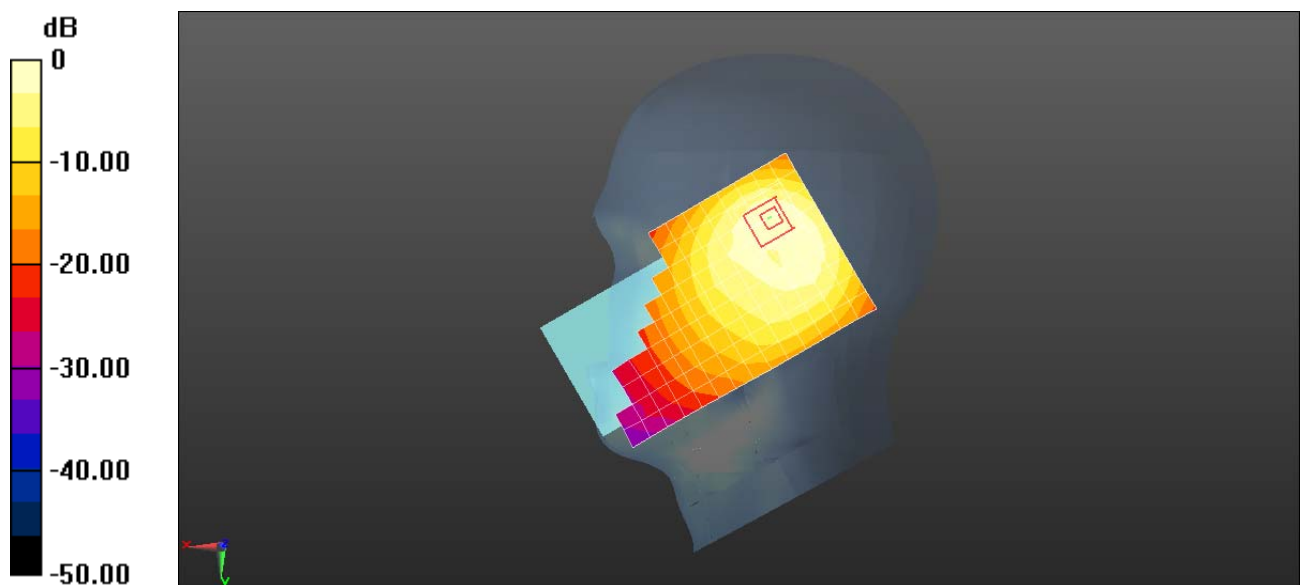

0 dB = 0.954 W/kg = -0.20 dBW/kg

Test Laboratory: HUAWEI SAR/HAC Lab

MHA-L29 LTE Band XVII 10M QPSK 1RB 25 offset 23790CH Back Side 15mm-Second Antenna

DUT: MHA-L29; Type: Smart Phone; Serial: SAR1

Communication System: UID 0, LTE-FDD (SC-FDMA, 10MHz, QPSK/16-QAM) (0); Frequency: 710 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 710 \text{ MHz}$; $\sigma = 0.956 \text{ S/m}$; $\epsilon_r = 56.156$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY Configuration:

- ε Probe: ES3DV3 - SN3168; ConvF(6.45, 6.45, 6.45); Calibrated: 2016-9-27;
- ε Sensor-Surface: 3mm (Mechanical Surface Detection), $z = 2.0, 32.0$
- ε Electronics: DAE4 Sn851; Calibrated: 2016-7-22
- ε Phantom: SAM2; Type: SAM; Serial: TP:1474
- ε DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Body/Area Scan (9x15x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$


Maximum value of SAR (measured) = 0.172 W/kg

Configuration/Body/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 7.837 V/m ; Power Drift = 0.00 dB

Peak SAR (extrapolated) = 0.240 W/kg

SAR(1 g) = 0.144 W/kg ; SAR(10 g) = 0.086 W/kg

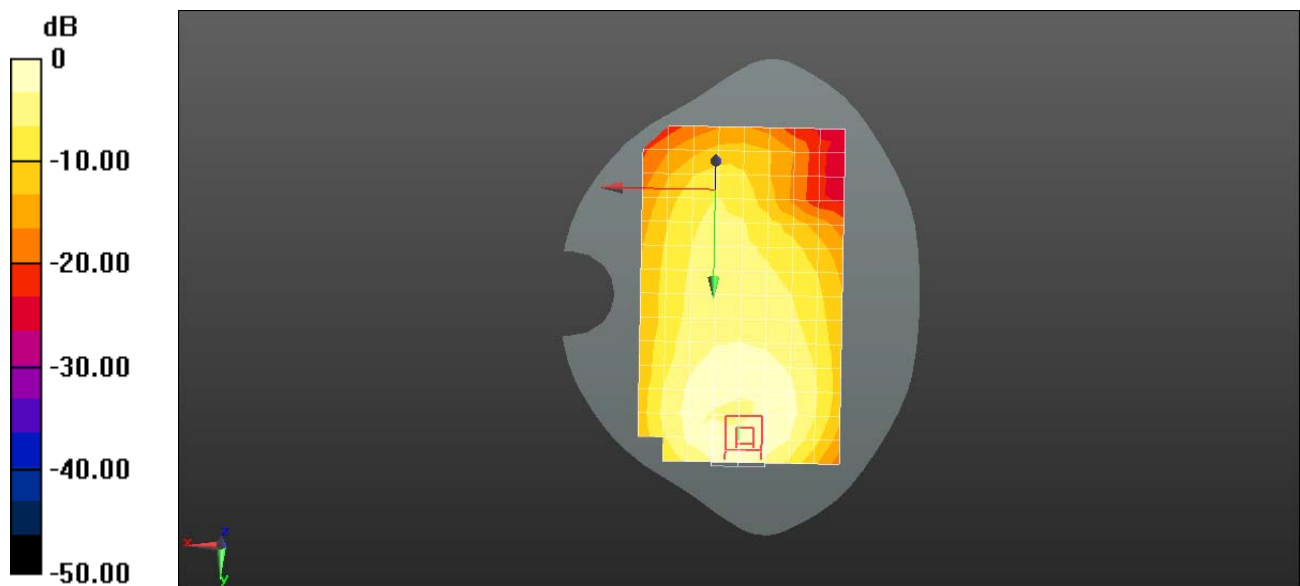

0 dB = 0.172 W/kg = -7.64 dBW/kg

Test Laboratory: HUAWEI SAR/HAC Lab

MHA-L29 LTE Band XVII 10M QPSK 50RB 13 offset 23800CH Back Side 10mm-Second Antenna

DUT: MHA-L29; Type: Smart Phone; Serial: SAR1

Communication System: UID 0, LTE-FDD (SC-FDMA, 10MHz, QPSK/16-QAM) (0); Frequency: 711 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 711 \text{ MHz}$; $\sigma = 0.956 \text{ S/m}$; $\epsilon_r = 56.154$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY Configuration:

- ε Probe: ES3DV3 - SN3168; ConvF(6.45, 6.45, 6.45); Calibrated: 2016-9-27;
- ε Sensor-Surface: 3mm (Mechanical Surface Detection), $z = 2.0, 32.0$
- ε Electronics: DAE4 Sn851; Calibrated: 2016-7-22
- ε Phantom: SAM2; Type: SAM; Serial: TP:1474
- ε DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Body/Area Scan (9x15x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (measured) = 0.475 W/kg


Configuration/Body/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 9.175 V/m ; Power Drift = 0.07 dB

Peak SAR (extrapolated) = 0.721 W/kg

SAR(1 g) = 0.394 W/kg ; SAR(10 g) = 0.222 W/kg

Maximum value of SAR (measured) = 0.472 W/kg

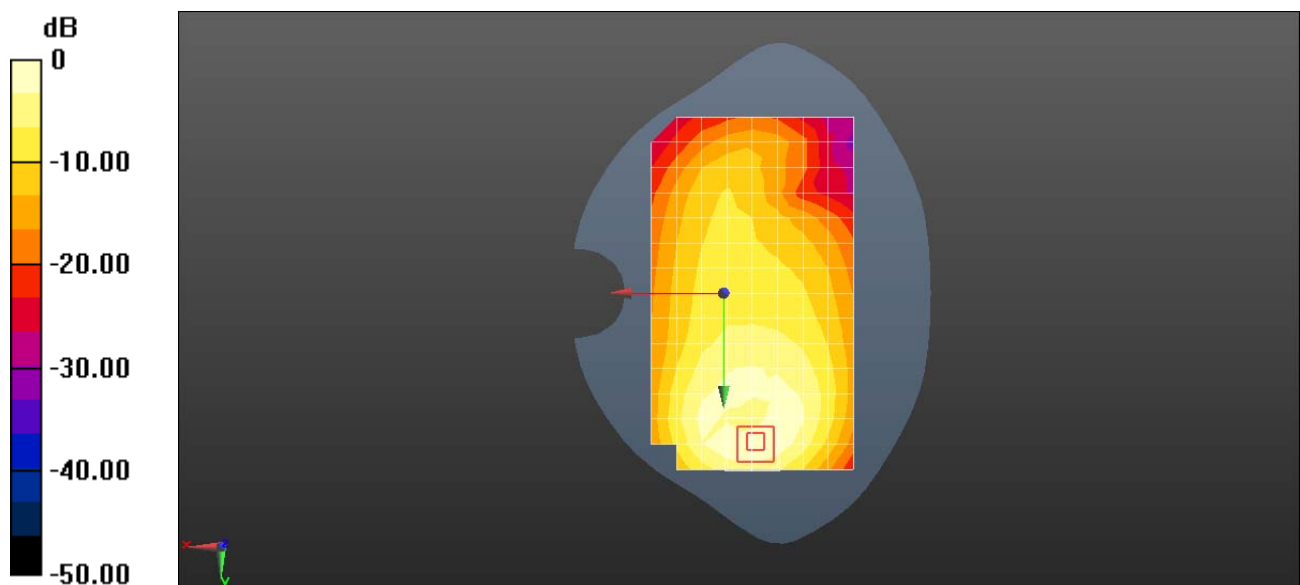

Test Laboratory: HUAWEI SAR/HAC Lab

MHA-L29 LTE Band XXVI 15M QPSK 1RB 38 offset 26865CH Right touch-Second Antenna

DUT: MHA-L29; Type: Smart Phone; Serial: SAR2

Communication System: UID 0, LTE-FDD (SC-FDMA, 15MHz, QPSK/16-QAM) (0); Frequency: 831.5 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 831.5$ MHz; $\sigma = 0.901$ S/m; $\epsilon_r = 41.897$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY Configuration:

- ε Probe: EX3DV4 - SN3736; ConvF(9.22, 9.22, 9.22); Calibrated: 2017-4-27;
- ε Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- ε Electronics: DAE4 Sn852; Calibrated: 2017-4-27
- ε Phantom: SAM3; Type: SAM; Serial: TP-1597
- ε DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Head/Area Scan (9x14x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 1.58 W/kg

Configuration/Head/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm


Reference Value = 21.82 V/m; Power Drift = 0.05 dB

Peak SAR (extrapolated) = 2.17 W/kg

SAR(1 g) = 0.940 W/kg; SAR(10 g) = 0.497 W/kg

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 1.67 W/kg

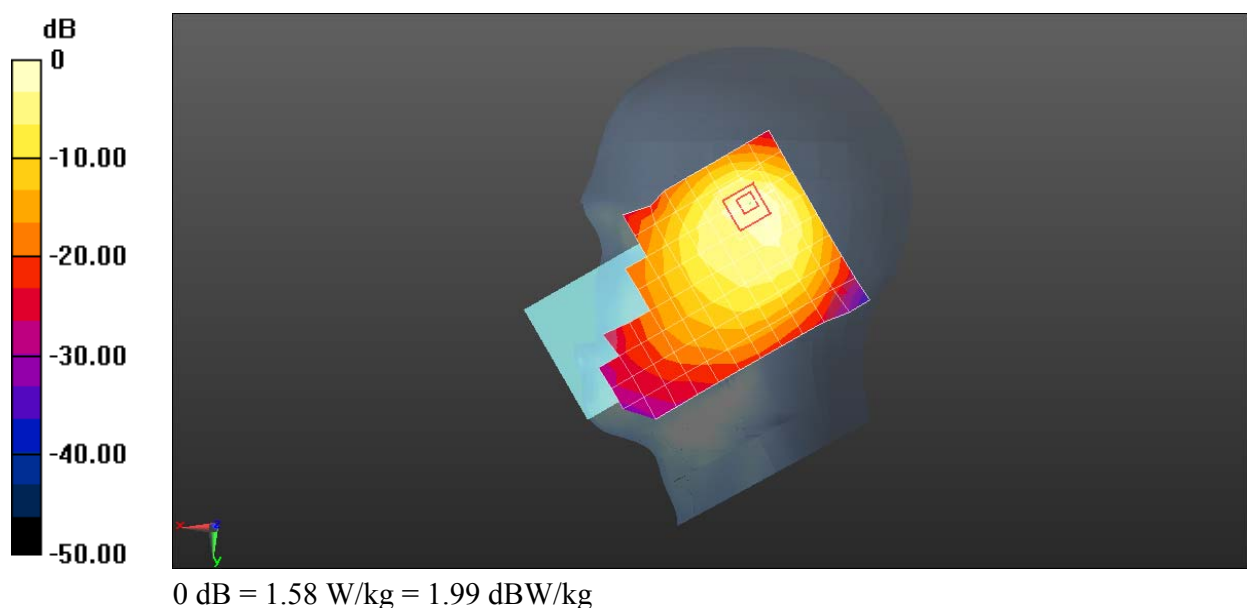

Test Laboratory: HUAWEI SAR/HAC Lab

MHA-L29 LTE Band XXVI 15M QPSK 1RB 38 offset 26965CH Back Side 15mm-Second Antenna

DUT: MHA-L29; Type: Smart Phone; Serial: SAR1

Communication System: UID 0, LTE-FDD (SC-FDMA, 15MHz, QPSK/16-QAM) (0); Frequency: 841.5 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 841.5$ MHz; $\sigma = 0.988$ S/m; $\epsilon_r = 53.027$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- ε Probe: EX3DV4 - SN3578; ConvF(9.53, 9.53, 9.53); Calibrated: 2017-5-5;
- ε Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- ε Electronics: DAE4 Sn1236; Calibrated: 2017-7-21
- ε Phantom: SAM2; Type: SAM; Serial: TP:1474
- ε DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Body/Area Scan (9x14x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.331 W/kg

Configuration/Body/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm


Reference Value = 11.91 V/m; Power Drift = -0.03 dB

Peak SAR (extrapolated) = 0.395 W/kg

SAR(1 g) = 0.234 W/kg; SAR(10 g) = 0.138 W/kg

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.328 W/kg

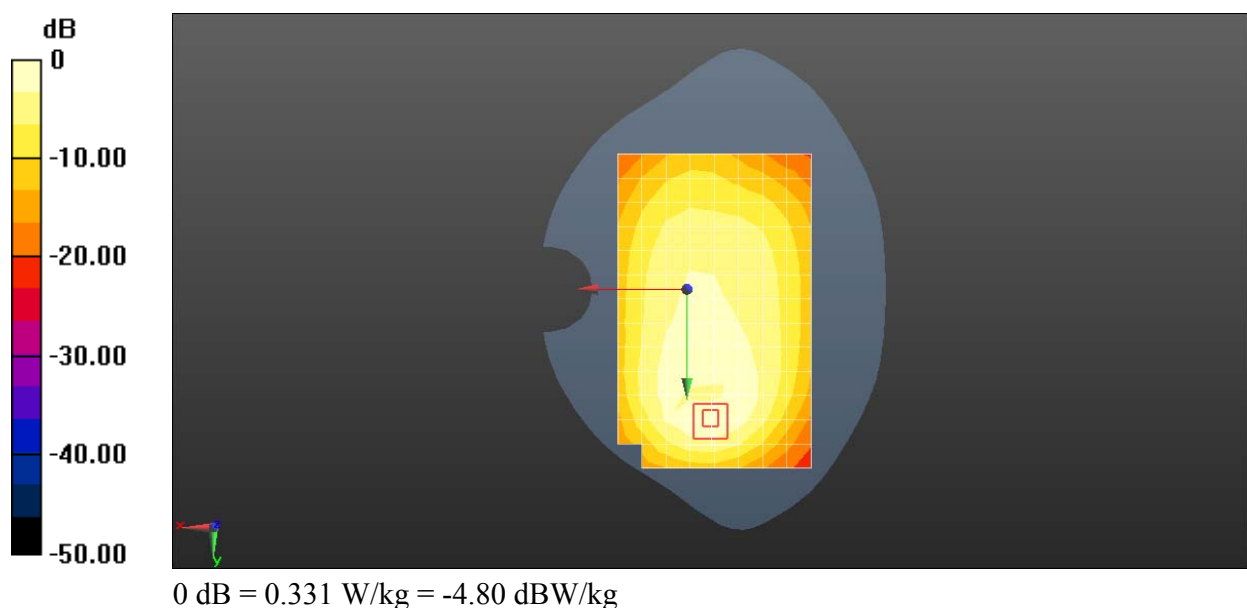

Test Laboratory: HUAWEI SAR/HAC Lab

MHA-L29 LTE Band XXVI 15M QPSK 1RB 38 offset 26965CH Back Side 10mm-Second Antenna

DUT: MHA-L29; Type: Smart Phone; Serial: SAR1

Communication System: UID 0, LTE-FDD (SC-FDMA, 15MHz, QPSK/16-QAM) (0); Frequency: 841.5 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 841.5$ MHz; $\sigma = 0.988$ S/m; $\epsilon_r = 53.027$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- ε Probe: EX3DV4 - SN3578; ConvF(9.53, 9.53, 9.53); Calibrated: 2017-5-5;
- ε Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- ε Electronics: DAE4 Sn1236; Calibrated: 2017-7-21
- ε Phantom: SAM2; Type: SAM; Serial: TP:1474
- ε DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Body/Area Scan (9x14x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.632 W/kg

Configuration/Body/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm


Reference Value = 12.55 V/m; Power Drift = -0.00 dB

Peak SAR (extrapolated) = 0.925 W/kg

SAR(1 g) = 0.496 W/kg; SAR(10 g) = 0.275 W/kg

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.693 W/kg

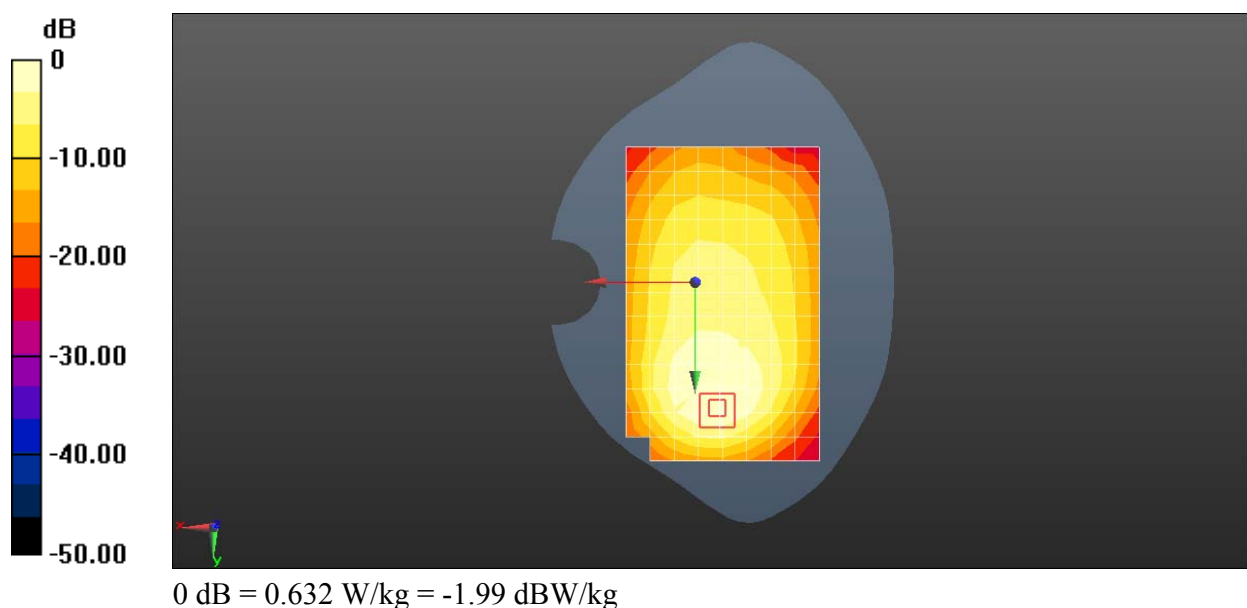

Test Laboratory: HUAWEI SAR/HAC Lab

MHA-L29 LTE Band XXXVIII 20M QPSK 1RB 50 offset 38150CH Right touch-Second Antenna

DUT: MHA-L29; Type: Smart Phone; Serial: SAR1

Communication System: UID 0, LTE-TDD (SC-FDMA, 20MHz, QPSK/16-QAM) (0); Frequency: 2610 MHz; Duty Cycle: 1:1.57906

Medium parameters used: $f = 2610$ MHz; $\sigma = 1.979$ S/m; $\epsilon_r = 38.198$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY Configuration:

- ε Probe: EX3DV4 - SN3578; ConvF(7.31, 7.31, 7.31); Calibrated: 2017-5-5;
- ε Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- ε Electronics: DAE4 Sn918; Calibrated: 2017-6-26
- ε Phantom: SAM1; Type: SAM; Serial: TP-1475
- ε DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Head/Area Scan (10x16x1): Measurement grid: $dx=12$ mm, $dy=12$ mm

Maximum value of SAR (measured) = 1.48 W/kg


Configuration/Head/Zoom Scan (7x8x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 8.193 V/m; Power Drift = -0.00 dB

Peak SAR (extrapolated) = 1.99 W/kg

SAR(1 g) = 0.763 W/kg; SAR(10 g) = 0.365 W/kg

Maximum value of SAR (measured) = 1.37 W/kg

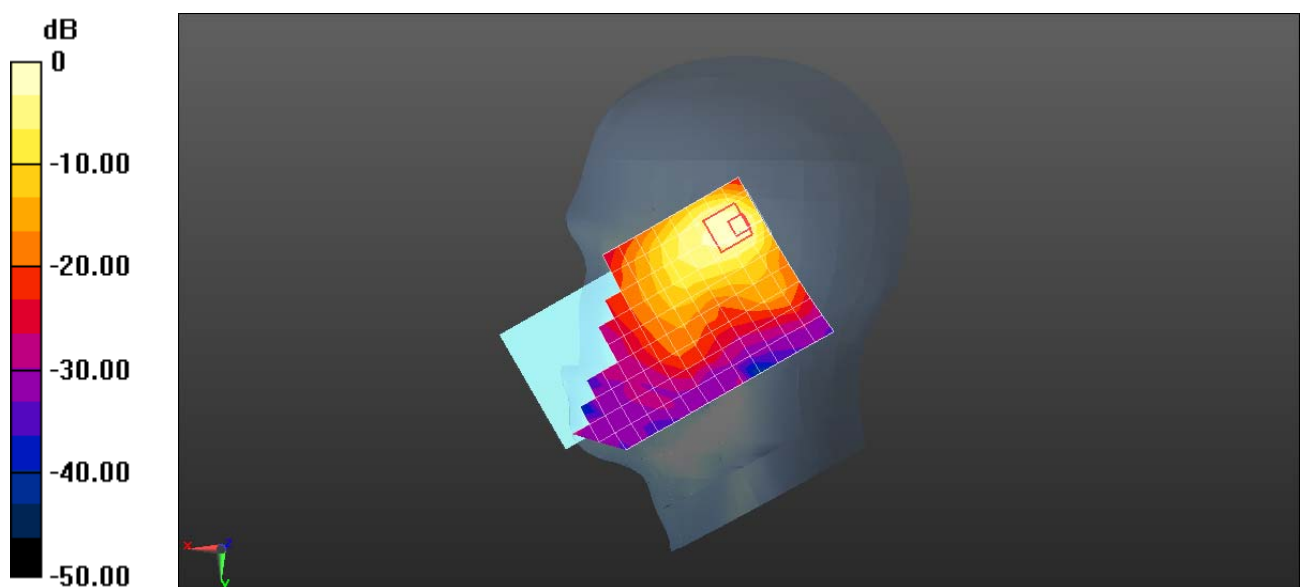

0 dB = 1.48 W/kg = 1.70 dBW/kg

Test Laboratory: HUAWEI SAR/HAC Lab

**MHA-L29 LTE Band XXXVIII 20M QPSK 1RB 99 offset 38000CH Front side
15mm-Second Antenna**

DUT: MHA-L29; Type: Smart Phone; Serial: SAR2

Communication System: UID 0, LTE-TDD (SC-FDMA, 20MHz, QPSK/16-QAM) (0); Frequency: 2595 MHz; Duty Cycle: 1:1.57906

Medium parameters used: $f = 2595$ MHz; $\sigma = 2.211$ S/m; $\epsilon_r = 50.276$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- ε Probe: EX3DV4 - SN3578; ConvF(7.27, 7.27, 7.27); Calibrated: 2017-5-5;
- ε Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- ε Electronics: DAE4 Sn1236; Calibrated: 2017-7-21
- ε Phantom: SAM2; Type: SAM; Serial: TP:1474
- ε DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Body/Area Scan (11x17x1): Measurement grid: $dx=12$ mm, $dy=12$ mm

Maximum value of SAR (measured) = 0.116 W/kg


Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 3.119 V/m; Power Drift = -0.11 dB

Peak SAR (extrapolated) = 0.145 W/kg

SAR(1 g) = 0.078 W/kg; SAR(10 g) = 0.043 W/kg

Maximum value of SAR (measured) = 0.119 W/kg

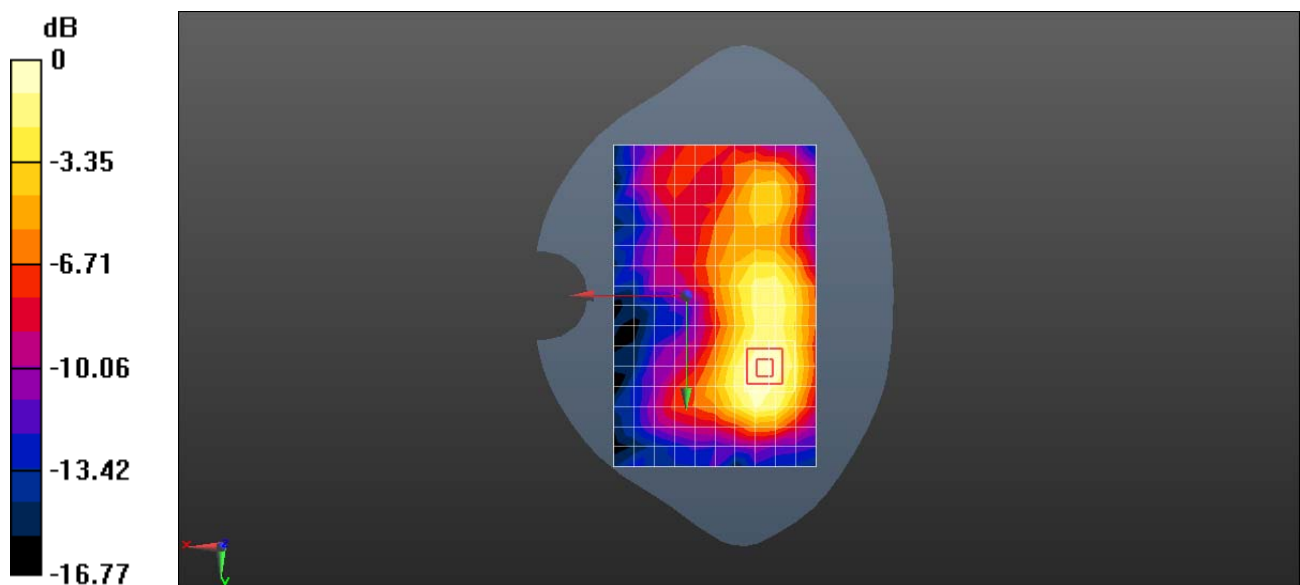

0 dB = 0.116 W/kg = -9.36 dBW/kg

Test Laboratory: HUAWEI SAR/HAC Lab

MHA-L29 LTE Band XXXVIII 20M QPSK 1RB 99 offset 38000CH Left side 10mm-Second Antenna

DUT: MHA-L29; Type: Smart Phone; Serial: SAR1

Communication System: UID 0, LTE-TDD (SC-FDMA, 20MHz, QPSK/16-QAM) (0); Frequency: 2595 MHz; Duty Cycle: 1:1.57906

Medium parameters used: $f = 2595$ MHz; $\sigma = 2.211$ S/m; $\epsilon_r = 50.276$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- ε Probe: EX3DV4 - SN3578; ConvF(7.27, 7.27, 7.27); Calibrated: 2017-5-5;
- ε Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- ε Electronics: DAE4 Sn1236; Calibrated: 2017-7-21
- ε Phantom: SAM2; Type: SAM; Serial: TP:1474
- ε DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Body/Area Scan (7x17x1): Measurement grid: $dx=12$ mm, $dy=12$ mm

Maximum value of SAR (measured) = 0.259 W/kg


Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 8.370 V/m; Power Drift = 0.07 dB

Peak SAR (extrapolated) = 0.349 W/kg

SAR(1 g) = 0.177 W/kg; SAR(10 g) = 0.088 W/kg

Maximum value of SAR (measured) = 0.285 W/kg

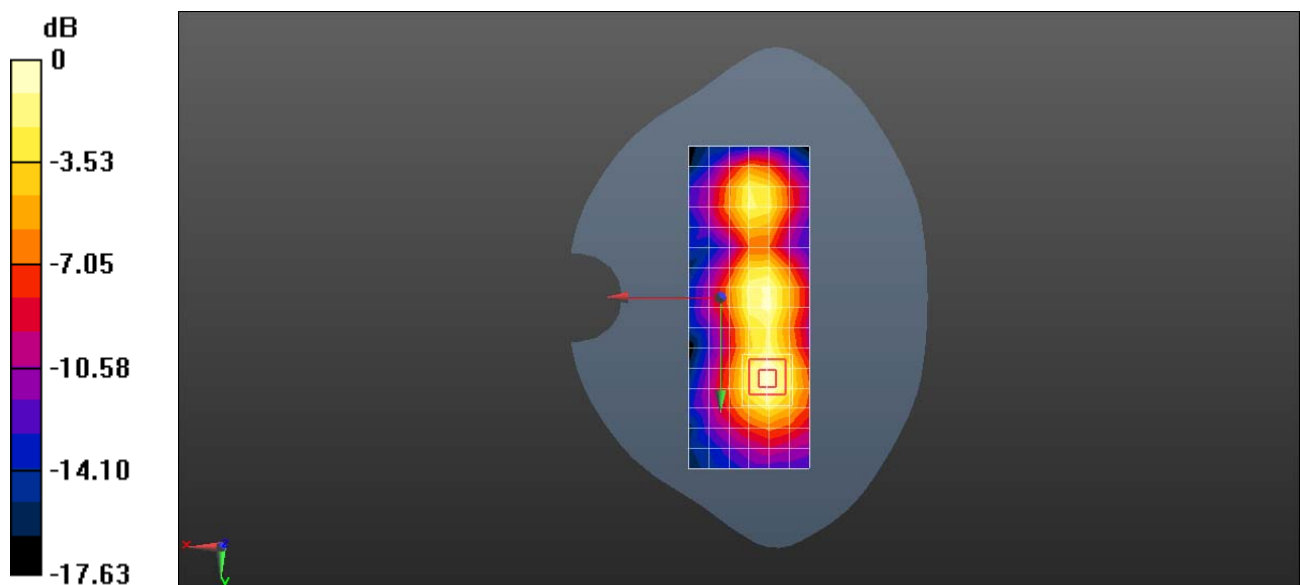

Test Laboratory: HUAWEI SAR/HAC Lab

MHA-L29 LTE Band XLI 20M QPSK 1RB 99 offset 41140CH Right touch-Second Antenna

DUT: MHA-L29; Type: Smart Phone; Serial: SAR1

Communication System: UID 0, LTE-TDD (SC-FDMA, 20MHz, QPSK/16-QAM) (0); Frequency: 2645 MHz; Duty Cycle: 1:1.57906

Medium parameters used: $f = 2645$ MHz; $\sigma = 2.016$ S/m; $\epsilon_r = 38.161$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY Configuration:

- ε Probe: EX3DV4 - SN3578; ConvF(7.31, 7.31, 7.31); Calibrated: 2017-5-5;
- ε Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- ε Electronics: DAE4 Sn918; Calibrated: 2017-6-26
- ε Phantom: SAM1; Type: SAM; Serial: TP-1475
- ε DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Head/Area Scan (10x16x1): Measurement grid: $dx=12$ mm, $dy=12$ mm

Maximum value of SAR (measured) = 1.26 W/kg


Configuration/Head/Zoom Scan (7x8x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 7.268 V/m; Power Drift = 0.12 dB

Peak SAR (extrapolated) = 1.73 W/kg

SAR(1 g) = 0.650 W/kg; SAR(10 g) = 0.298 W/kg

Maximum value of SAR (measured) = 1.19 W/kg

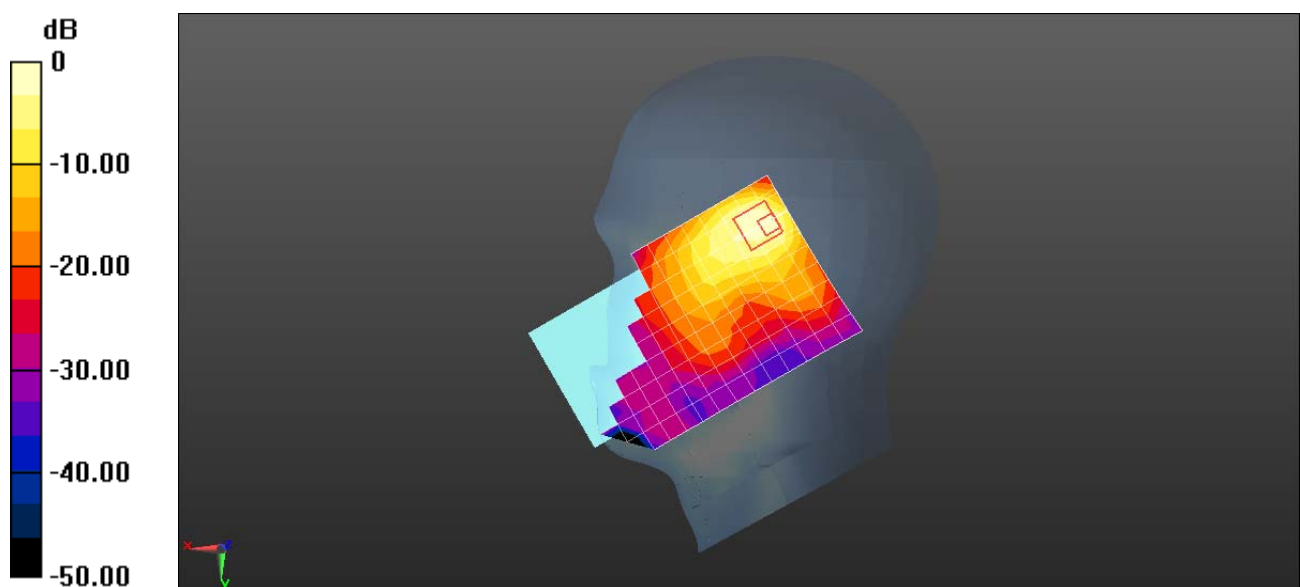

Test Laboratory: HUAWEI SAR/HAC Lab

MHA-L29 LTE Band XLI 20M QPSK 1RB 50 offset 40340CH Front side 15mm-Second Antenna

DUT: MHA-L29; Type: Smart Phone; Serial: SAR1

Communication System: UID 0, LTE-TDD (SC-FDMA, 20MHz, QPSK/16-QAM) (0); Frequency: 2565 MHz; Duty Cycle: 1:1.57906

Medium parameters used: $f = 2565$ MHz; $\sigma = 2.181$ S/m; $\epsilon_r = 50.332$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- ε Probe: EX3DV4 - SN3578; ConvF(7.27, 7.27, 7.27); Calibrated: 2017-5-5;
- ε Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- ε Electronics: DAE4 Sn1236; Calibrated: 2017-7-21
- ε Phantom: SAM2; Type: SAM; Serial: TP:1474
- ε DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Body/Area Scan (11x17x1): Measurement grid: $dx=12$ mm, $dy=12$ mm

Maximum value of SAR (measured) = 0.0477 W/kg


Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 1.850 V/m; Power Drift = 0.16 dB

Peak SAR (extrapolated) = 0.0590 W/kg

SAR(1 g) = 0.030 W/kg; SAR(10 g) = 0.016 W/kg

Maximum value of SAR (measured) = 0.0464 W/kg

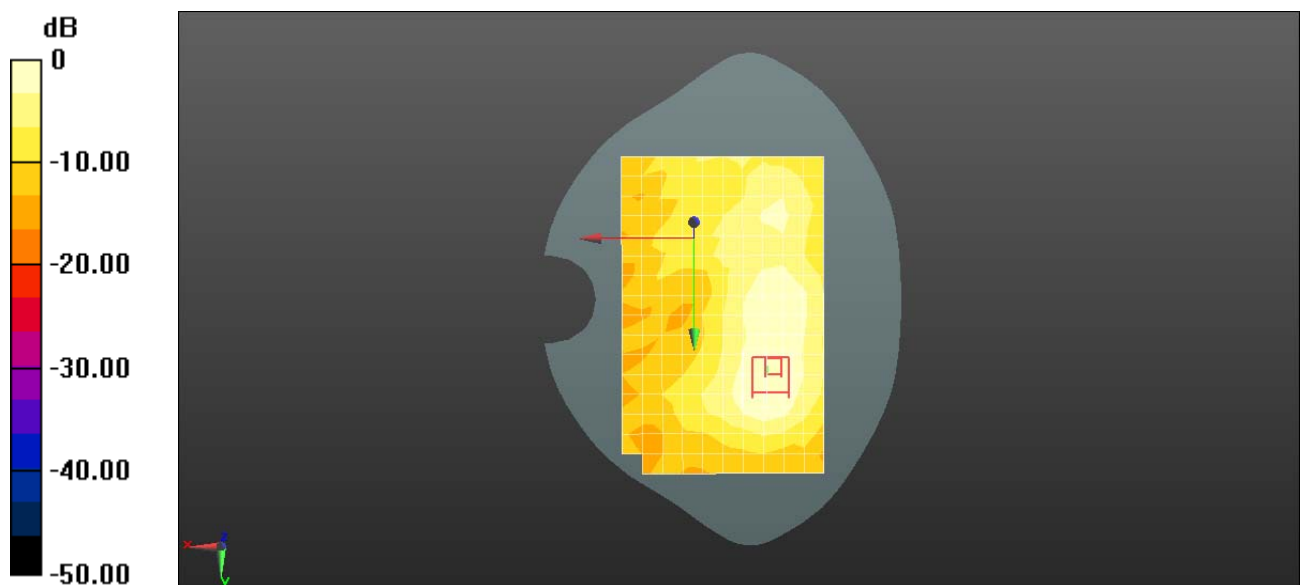

0 dB = 0.0477 W/kg = -13.21 dBW/kg

Test Laboratory: HUAWEI SAR/HAC Lab

MHA-L29 LTE Band XLI 20M QPSK 1RB 50 offset 40340CH Left side 15mm-Second Antenna

DUT: MHA-L29; Type: Smart Phone; Serial: SAR1

Communication System: UID 0, LTE-TDD (SC-FDMA, 20MHz, QPSK/16-QAM) (0); Frequency: 2565 MHz; Duty Cycle: 1:1.57906

Medium parameters used: $f = 2565$ MHz; $\sigma = 2.181$ S/m; $\epsilon_r = 50.332$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- ε Probe: EX3DV4 - SN3578; ConvF(7.27, 7.27, 7.27); Calibrated: 2017-5-5;
- ε Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- ε Electronics: DAE4 Sn1236; Calibrated: 2017-7-21
- ε Phantom: SAM2; Type: SAM; Serial: TP:1474
- ε DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Body/Area Scan (7x17x1): Measurement grid: $dx=12$ mm, $dy=12$ mm

Maximum value of SAR (measured) = 0.105 W/kg


Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 5.985 V/m; Power Drift = -0.08 dB

Peak SAR (extrapolated) = 0.154 W/kg

SAR(1 g) = 0.080 W/kg; SAR(10 g) = 0.041 W/kg

Maximum value of SAR (measured) = 0.126 W/kg

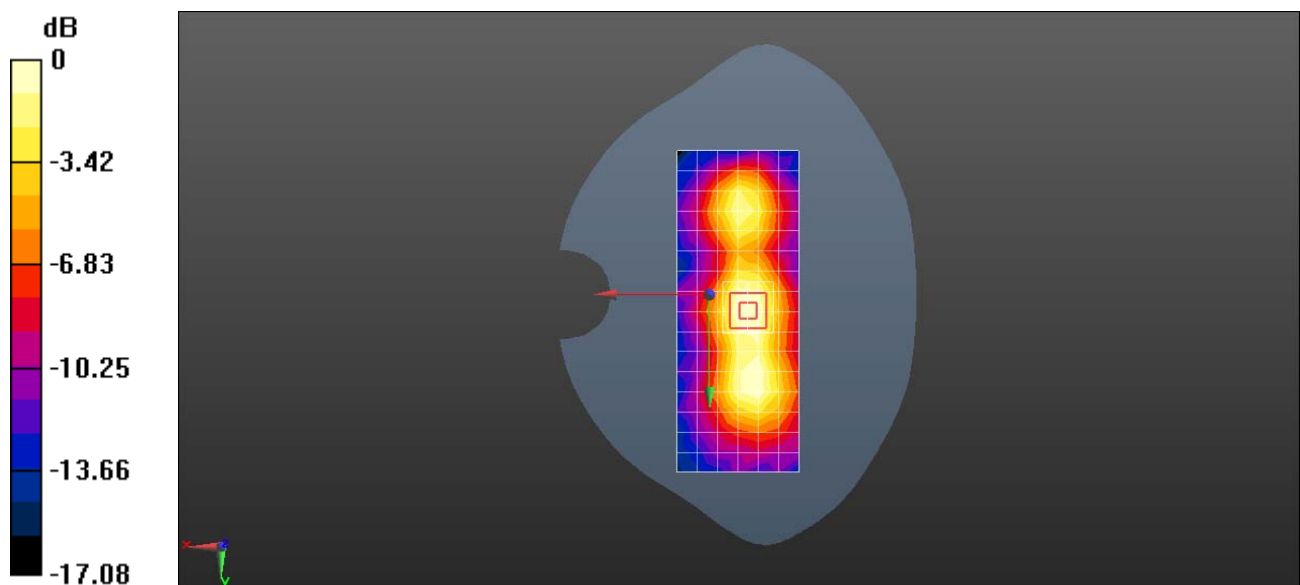

0 dB = 0.105 W/kg = -9.79 dBW/kg

Test Laboratory: HUAWEI SAR/HAC Lab

MHA-L29 GSM850 251CH Right touch-Main Antenna

DUT: MHA-L29; Type: Smart Phone; Serial: SAR2

Communication System: UID 0, HW-GSM\GPRS\EGPRS-1TS (0); Frequency: 848.8 MHz; Duty Cycle: 1:8.30042

Medium parameters used: $f = 849$ MHz; $\sigma = 0.904$ S/m; $\epsilon_r = 41.868$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY Configuration:

- ε Probe: EX3DV4 - SN3736; ConvF(9.22, 9.22, 9.22); Calibrated: 2017-4-27;
- ε Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- ε Electronics: DAE4 Sn852; Calibrated: 2017-4-27
- ε Phantom: SAM3; Type: SAM; Serial: TP-1597
- ε DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Head/Area Scan (9x14x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 0.219 W/kg


Configuration/Head/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 4.853 V/m; Power Drift = -0.19 dB

Peak SAR (extrapolated) = 0.237 W/kg

SAR(1 g) = 0.188 W/kg; SAR(10 g) = 0.146 W/kg

Maximum value of SAR (measured) = 0.220 W/kg

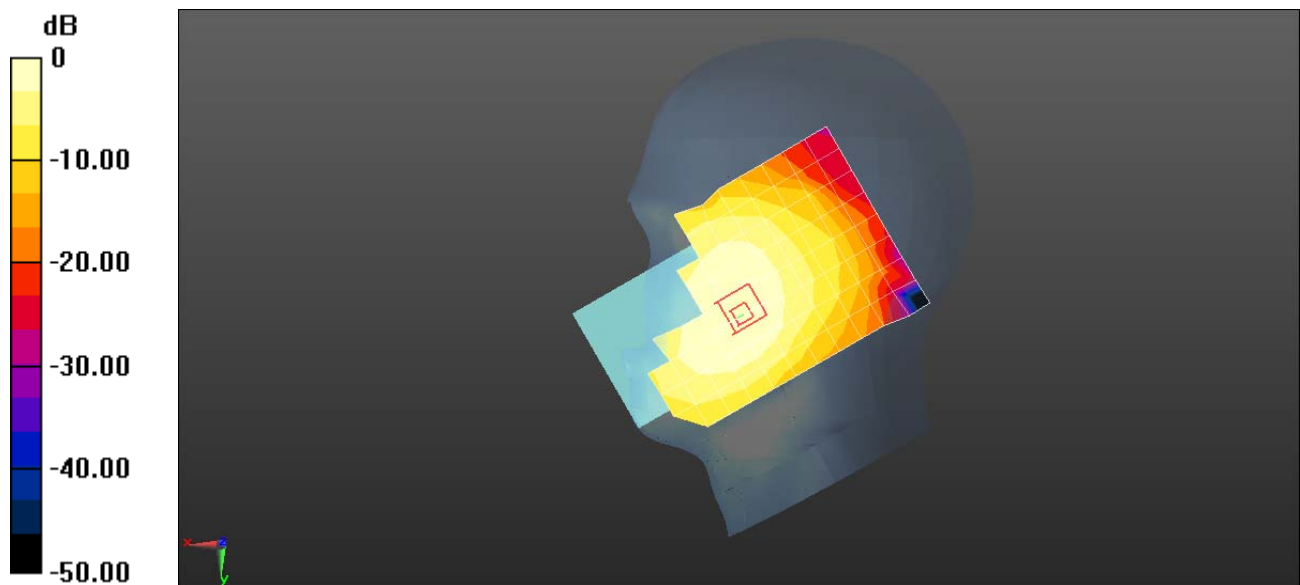

0 dB = 0.219 W/kg = -6.60 dBW/kg

Test Laboratory: HUAWEI SAR/HAC Lab

MHA-L29 GSM850 190CH Back side 15mm-Main Antenna

DUT: MHA-L29; Type: Smart Phone; Serial: SAR2

Communication System: UID 0, HW-GSM\GPRS\EGPRS-1TS (0); Frequency: 836.6 MHz; Duty Cycle: 1:8.30042

Medium parameters used: $f = 837$ MHz; $\sigma = 0.952$ S/m; $\epsilon_r = 54.25$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- ε Probe: EX3DV4 - SN3736; ConvF(9.36, 9.36, 9.36); Calibrated: 2017-4-27;
- ε Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- ε Electronics: DAE4 Sn852; Calibrated: 2017-4-27
- ε Phantom: SAM4; Type: SAM; Serial: TP-1620
- ε DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Body/Area Scan (9x15x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 0.255 W/kg


Configuration/Body/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 14.96 V/m; Power Drift = -0.05 dB

Peak SAR (extrapolated) = 0.284 W/kg

SAR(1 g) = 0.215 W/kg; SAR(10 g) = 0.165 W/kg

Maximum value of SAR (measured) = 0.259 W/kg

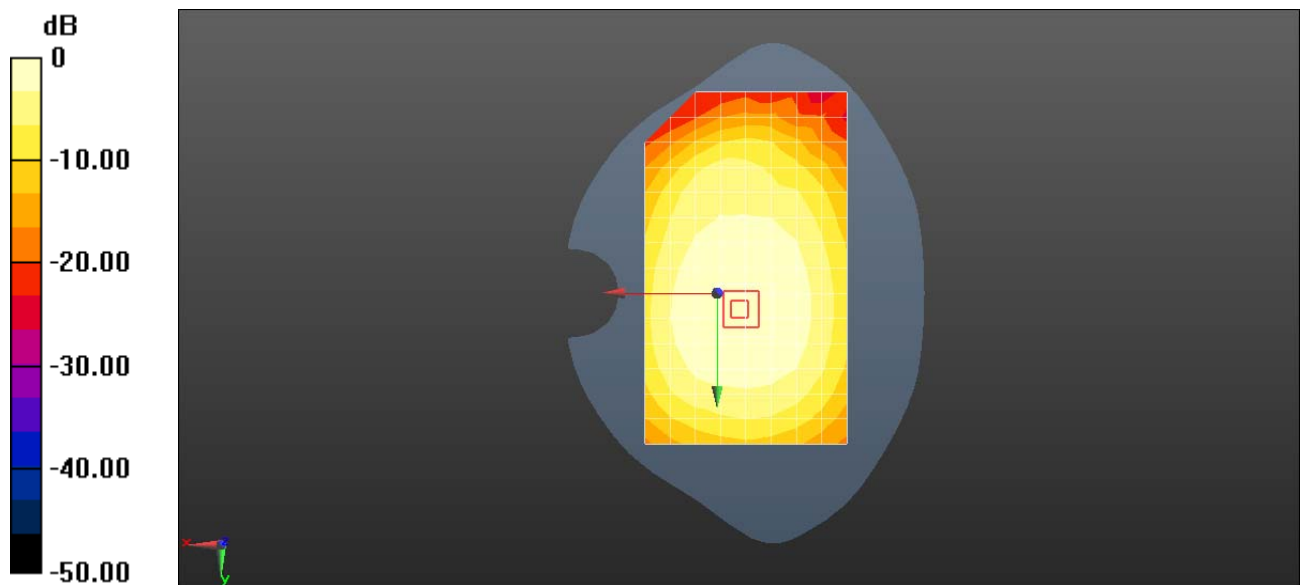

0 dB = 0.255 W/kg = -5.93 dBW/kg

Test Laboratory: HUAWEI SAR/HAC Lab

MHA-L29 GSM850 GPRS 2TS 190CH Right side 10mm-Main Antenna

DUT: MHA-L29; Type: Smart Phone; Serial: SAR2

Communication System: UID 0, HW-GSM\GPRS\EGPRS-2TS (0); Frequency: 836.6 MHz; Duty Cycle: 1:4.10015

Medium parameters used: $f = 837$ MHz; $\sigma = 0.952$ S/m; $\epsilon_r = 54.25$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- ε Probe: EX3DV4 - SN3736; ConvF(9.36, 9.36, 9.36); Calibrated: 2017-4-27;
- ε Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- ε Electronics: DAE4 Sn852; Calibrated: 2017-4-27
- ε Phantom: SAM4; Type: SAM; Serial: TP-1620
- ε DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Body/Area Scan (5x15x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 0.472 W/kg


Configuration/Body/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 20.06 V/m; Power Drift = -0.13 dB

Peak SAR (extrapolated) = 0.549 W/kg

SAR(1 g) = 0.368 W/kg; SAR(10 g) = 0.252 W/kg

Maximum value of SAR (measured) = 0.486 W/kg

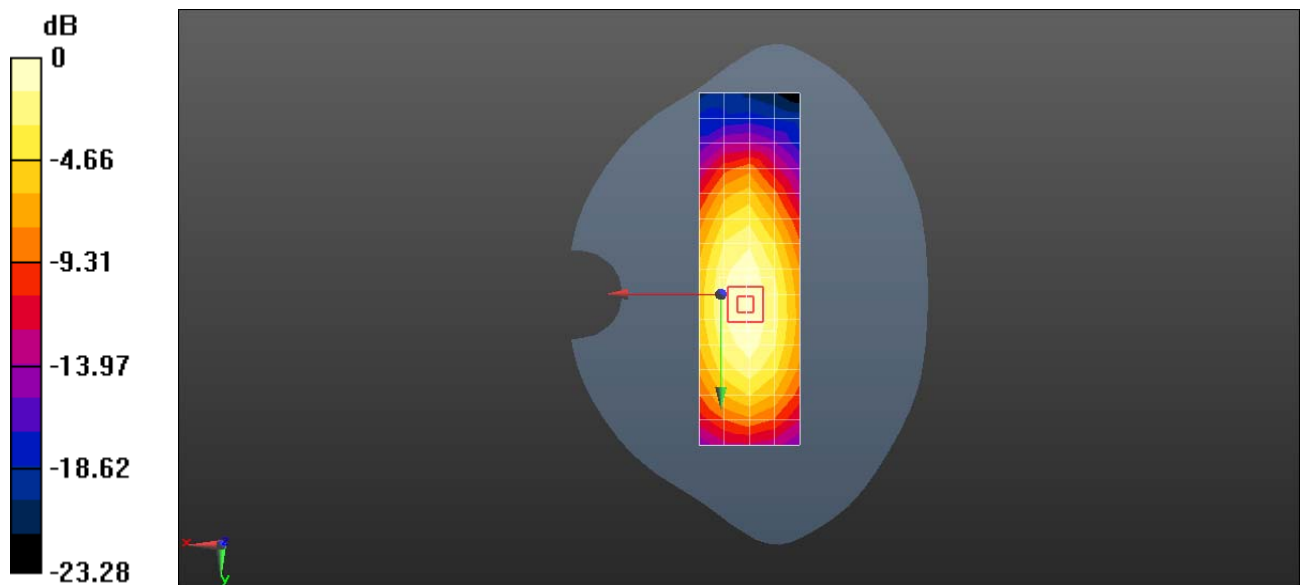

0 dB = 0.472 W/kg = -3.26 dBW/kg

Test Laboratory: HUAWEI SAR/HAC Lab

MHA-L29 GSM1900 512CH Right touch-Main Antenna

DUT: MHA-L29; Type: Smart Phone; Serial: SAR2

Communication System: UID 0, HW-GSM\GPRS\EGPRS-1TS (0); Frequency: 1850.2 MHz; Duty Cycle: 1:8.30042

Medium parameters used (interpolated): $f = 1850.2$ MHz; $\sigma = 1.371$ S/m; $\epsilon_r = 39.449$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY Configuration:

- ε Probe: EX3DV4 - SN3736; ConvF(7.73, 7.73, 7.73); Calibrated: 2017-4-27;
- ε Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- ε Electronics: DAE4 Sn852; Calibrated: 2017-4-27
- ε Phantom: SAM3; Type: SAM; Serial: TP-1597
- ε DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Head/Area Scan (9x14x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.159 W/kg

Configuration/Head/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm


Reference Value = 3.314 V/m; Power Drift = 0.07 dB

Peak SAR (extrapolated) = 0.178 W/kg

SAR(1 g) = 0.117 W/kg; SAR(10 g) = 0.073 W/kg

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.155 W/kg

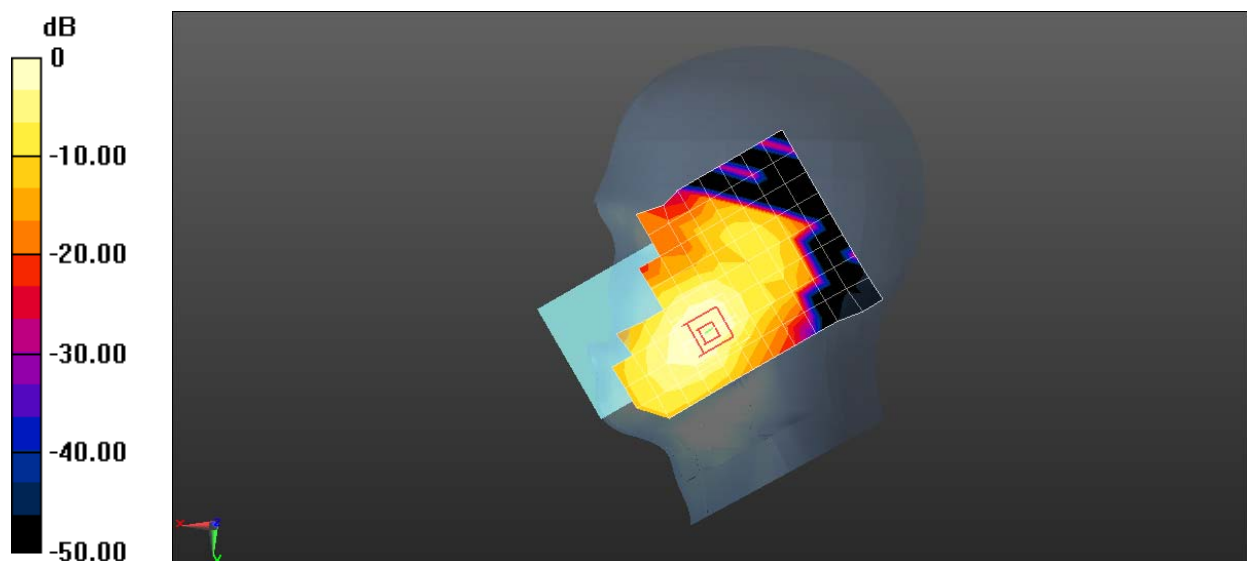

Test Laboratory: HUAWEI SAR/HAC Lab

MHA-L29 GSM1900 661CH Back side 15mm-Main Antenna

DUT: MHA-L29; Type: Smart Phone; Serial: SAR2

Communication System: UID 0, HW-GSM\GPRS\EGPRS-1TS (0); Frequency: 1880 MHz; Duty Cycle: 1:8.30042

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.54$ S/m; $\epsilon_r = 52.486$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- ε Probe: EX3DV4 - SN3736; ConvF(7.5, 7.5, 7.5); Calibrated: 2017-4-27;
- ε Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- ε Electronics: DAE4 Sn852; Calibrated: 2017-4-27
- ε Phantom: SAM4; Type: SAM; Serial: TP-1620
- ε DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Body/Area Scan (9x15x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 0.148 W/kg


Configuration/Body/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 3.670 V/m; Power Drift = -0.19 dB

Peak SAR (extrapolated) = 0.214 W/kg

SAR(1 g) = 0.126 W/kg; SAR(10 g) = 0.071 W/kg

Maximum value of SAR (measured) = 0.181 W/kg

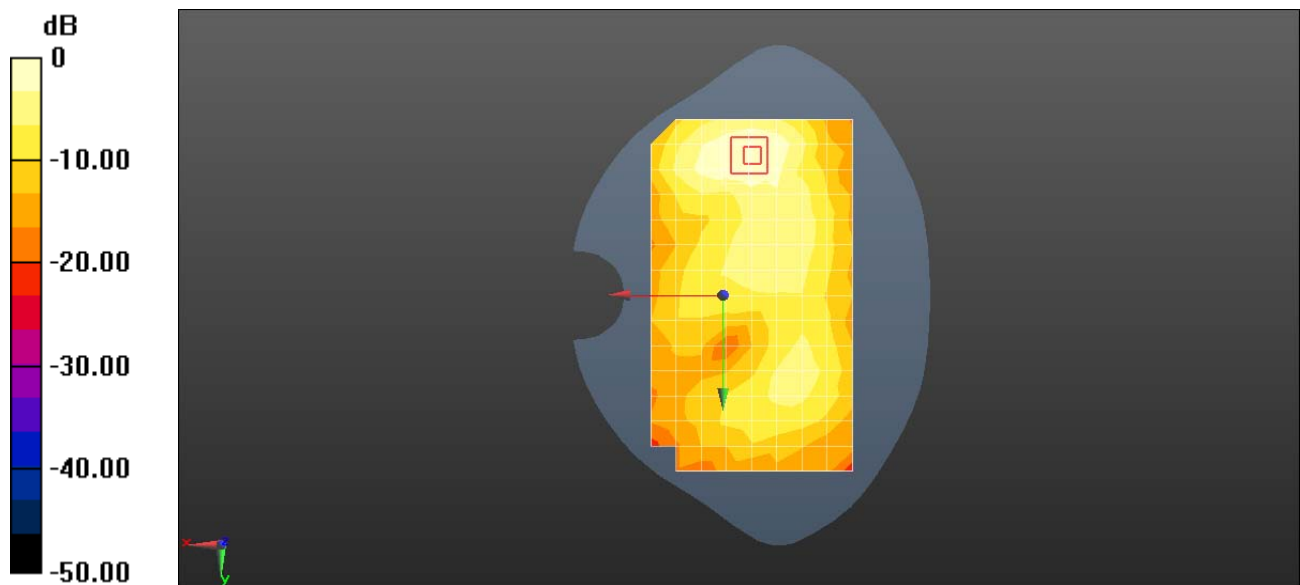

0 dB = 0.148 W/kg = -8.30 dBW/kg

Test Laboratory: HUAWEI SAR/HAC Lab

MHA-L29 GSM1900 GPRS 2TS 661CH Bottom side 10mm-Main Antenna

DUT: MHA-L29; Type: Smart Phone; Serial: SAR2

Communication System: UID 0, HW-GSM\GPRS\EGPRS-2TS (0); Frequency: 1880 MHz; Duty Cycle: 1:4.10015

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.54$ S/m; $\epsilon_r = 52.486$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- ε Probe: EX3DV4 - SN3736; ConvF(7.5, 7.5, 7.5); Calibrated: 2017-4-27;
- ε Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- ε Electronics: DAE4 Sn852; Calibrated: 2017-4-27
- ε Phantom: SAM4; Type: SAM; Serial: TP-1620
- ε DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Body/Area Scan (5x11x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 0.833 W/kg


Configuration/Body/Zoom Scan (5x6x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 20.04 V/m; Power Drift = -0.16 dB

Peak SAR (extrapolated) = 1.04 W/kg

SAR(1 g) = 0.575 W/kg; SAR(10 g) = 0.304 W/kg

Maximum value of SAR (measured) = 0.872 W/kg

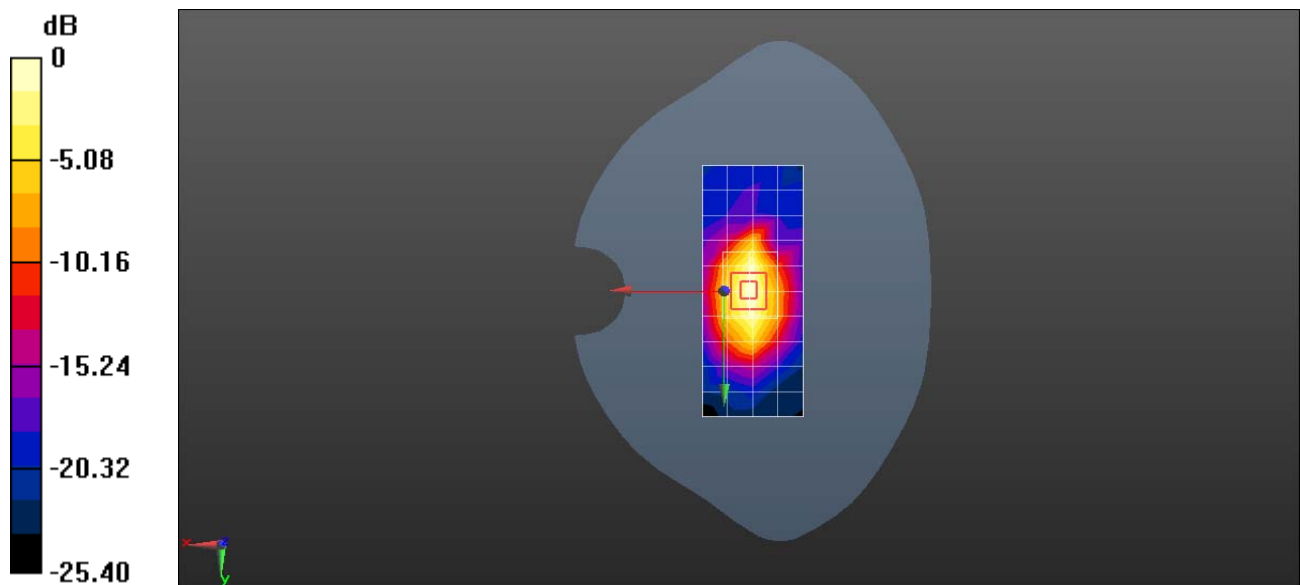

0 dB = 0.833 W/kg = -0.79 dBW/kg

Test Laboratory: HUAWEI SAR/HAC Lab

MHA-L29 GSM1900 GPRS 2TS 661CH Bottom side 0mm-Main Antenna

DUT: MHA-L29; Type: Smart Phone; Serial: SAR2

Communication System: UID 0, HW-GSM\GPRS\EGPRS-2TS (0); Frequency: 1880 MHz; Duty Cycle: 1:4.10015

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.54$ S/m; $\epsilon_r = 52.486$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- ε Probe: EX3DV4 - SN3736; ConvF(7.5, 7.5, 7.5); Calibrated: 2017-4-27;
- ε Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- ε Electronics: DAE4 Sn852; Calibrated: 2017-4-27
- ε Phantom: SAM4; Type: SAM; Serial: TP-1620
- ε DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Body/Area Scan (5x11x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 0.636 W/kg


Configuration/Body/Zoom Scan (6x6x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 10.91 V/m; Power Drift = -0.05 dB

Peak SAR (extrapolated) = 0.736 W/kg

SAR(1 g) = 0.288 W/kg; SAR(10 g) = 0.135 W/kg

Maximum value of SAR (measured) = 0.610 W/kg

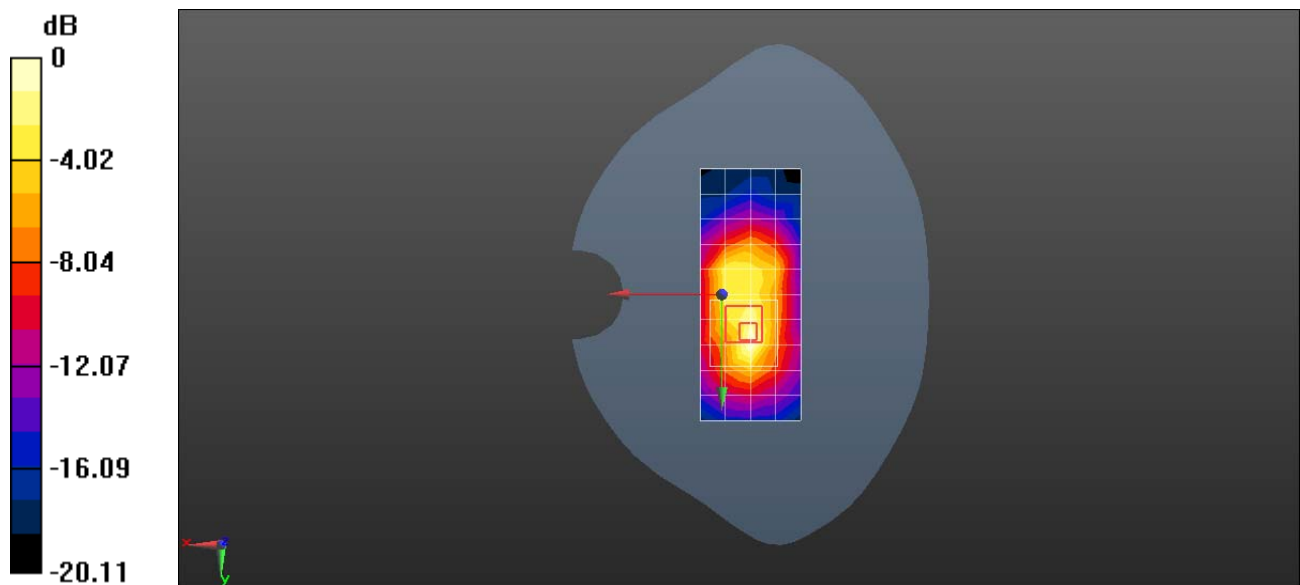

Test Laboratory: HUAWEI SAR/HAC Lab

MHA-L29 UMTS Band II 9262CH Right touch-Main Antenna

DUT: MHA-L29; Type: Smart Phone; Serial: SAR2

Communication System: UID 0, HW-UMTS-FDD(WCDMA) (0); Frequency: 1852.4 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 1852.4$ MHz; $\sigma = 1.372$ S/m; $\epsilon_r = 39.45$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY Configuration:

- ε Probe: EX3DV4 - SN3736; ConvF(7.73, 7.73, 7.73); Calibrated: 2017-4-27;
- ε Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- ε Electronics: DAE4 Sn852; Calibrated: 2017-4-27
- ε Phantom: SAM3; Type: SAM; Serial: TP-1597
- ε DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Head/Area Scan (9x14x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.423 W/kg

Configuration/Head/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm


Reference Value = 7.395 V/m; Power Drift = 0.14 dB

Peak SAR (extrapolated) = 0.515 W/kg

SAR(1 g) = 0.339 W/kg; SAR(10 g) = 0.216 W/kg

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.445 W/kg

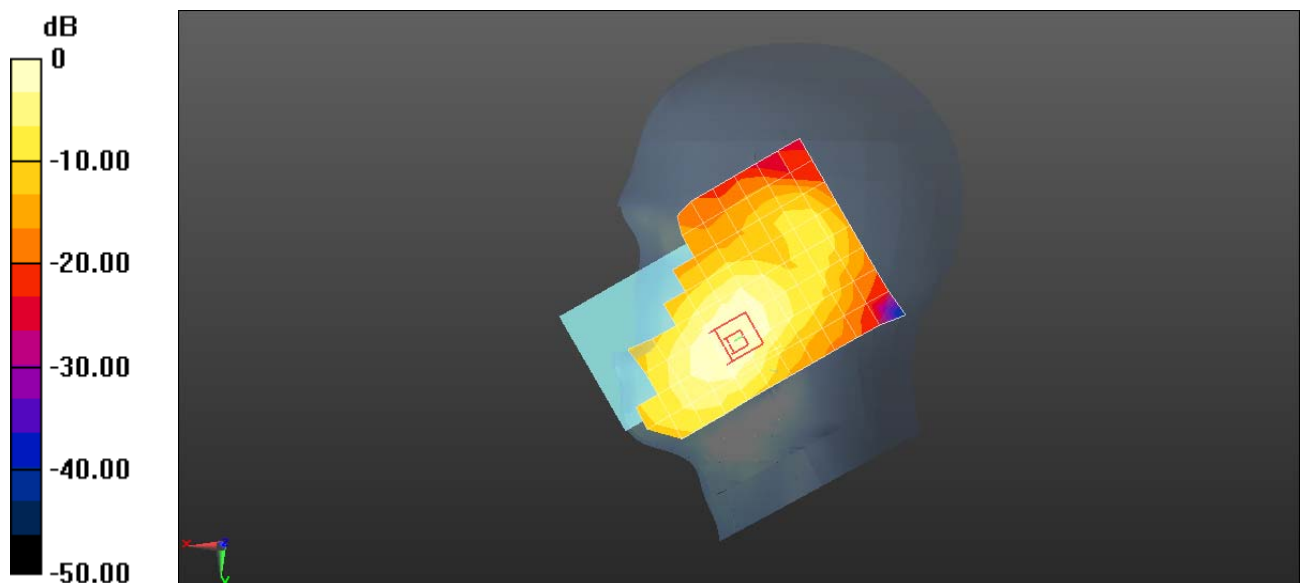

Test Laboratory: HUAWEI SAR/HAC Lab

MHA-L29 UMTS Band II 9400CH Back side 15mm-Main Antenna

DUT: MHA-L29; Type: Smart Phone; Serial: SAR2

Communication System: UID 0, HW-UMTS-FDD(WCDMA) (0); Frequency: 1880 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.54$ S/m; $\epsilon_r = 52.486$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- ε Probe: EX3DV4 - SN3736; ConvF(7.5, 7.5, 7.5); Calibrated: 2017-4-27;
- ε Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- ε Electronics: DAE4 Sn852; Calibrated: 2017-4-27
- ε Phantom: SAM4; Type: SAM; Serial: TP-1620
- ε DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Body/Area Scan (9x14x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 0.138 W/kg


Configuration/Body/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 3.170 V/m; Power Drift = 0.09 dB

Peak SAR (extrapolated) = 0.177 W/kg

SAR(1 g) = 0.104 W/kg; SAR(10 g) = 0.058 W/kg

Maximum value of SAR (measured) = 0.150 W/kg

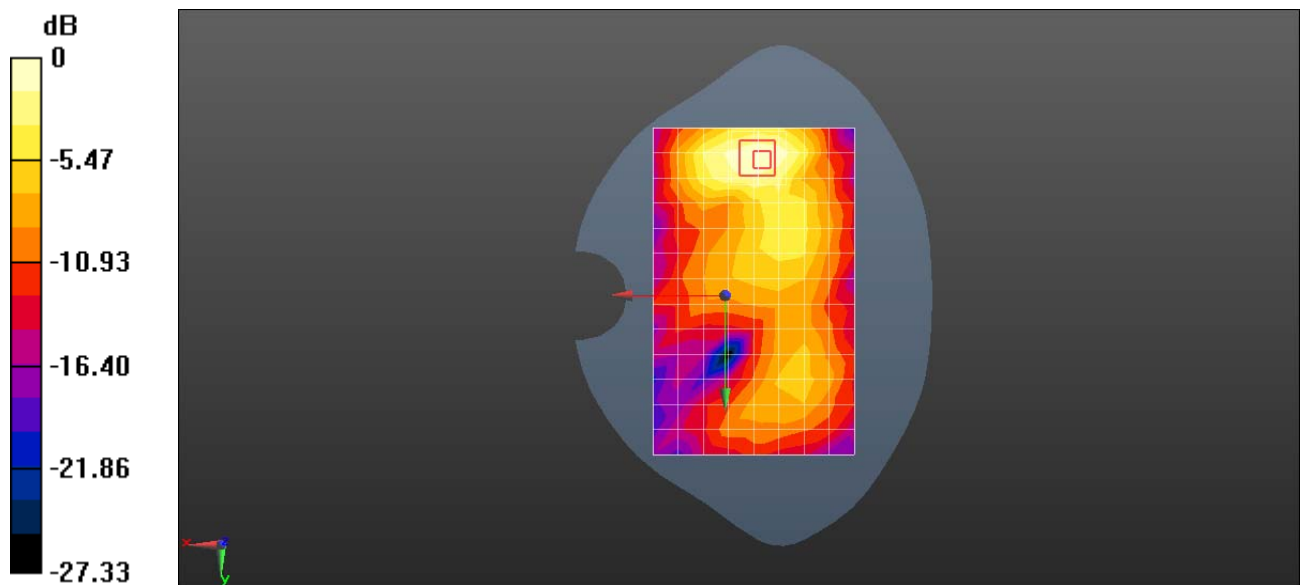

0 dB = 0.138 W/kg = -8.60 dBW/kg

Test Laboratory: HUAWEI SAR/HAC Lab

MHA-L29 UMTS Band II 9538CH Bottom side 10mm-Main Antenna

DUT: MHA-L29; Type: Smart Phone; Serial: SAR2

Communication System: UID 0, HW-UMTS-FDD(WCDMA) (0); Frequency: 1907.6 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1908 \text{ MHz}$; $\sigma = 1.559 \text{ S/m}$; $\epsilon_r = 52.464$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY Configuration:

- ε Probe: EX3DV4 - SN3736; ConvF(7.5, 7.5, 7.5); Calibrated: 2017-4-27;
- ε Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- ε Electronics: DAE4 Sn852; Calibrated: 2017-4-27
- ε Phantom: SAM4; Type: SAM; Serial: TP-1620
- ε DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Body/Area Scan (5x11x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (measured) = 1.19 W/kg


Configuration/Body/Zoom Scan (5x6x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 26.63 V/m ; Power Drift = -0.14 dB

Peak SAR (extrapolated) = 1.61 W/kg

SAR(1 g) = 0.942 W/kg ; SAR(10 g) = 0.515 W/kg

Maximum value of SAR (measured) = 1.15 W/kg

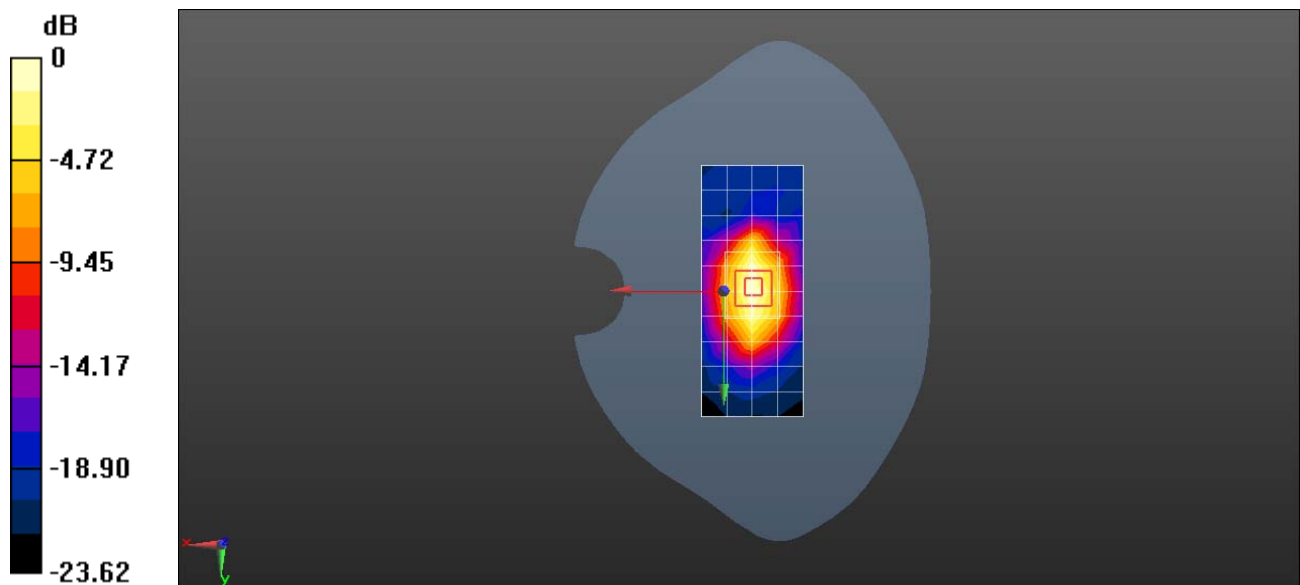

Test Laboratory: HUAWEI SAR/HAC Lab

MHA-L29 UMTS Band II 9538CH Back side 0mm-Main Antenna

DUT: MHA-L29; Type: Smart Phone; Serial: SAR2

Communication System: UID 0, HW-UMTS-FDD(WCDMA) (0); Frequency: 1907.6 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1908$ MHz; $\sigma = 1.514$ S/m; $\epsilon_r = 52.21$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- ε Probe: ES3DV3 - SN3168; ConvF(4.99, 4.99, 4.99); Calibrated: 2016-9-27;
- ε Sensor-Surface: 3mm (Mechanical Surface Detection), $z = 2.0, 32.0$
- ε Electronics: DAE4 Sn852; Calibrated: 2017-4-27
- ε Phantom: SAM4; Type: SAM; Serial: TP-1620
- ε DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Body/Area Scan (9x14x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 5.17 W/kg


Configuration/Body/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 4.033 V/m; Power Drift = -0.19 dB

Peak SAR (extrapolated) = 10.5 W/kg

SAR(1 g) = 4.65 W/kg; SAR(10 g) = 1.97 W/kg

Maximum value of SAR (measured) = 6.15 W/kg

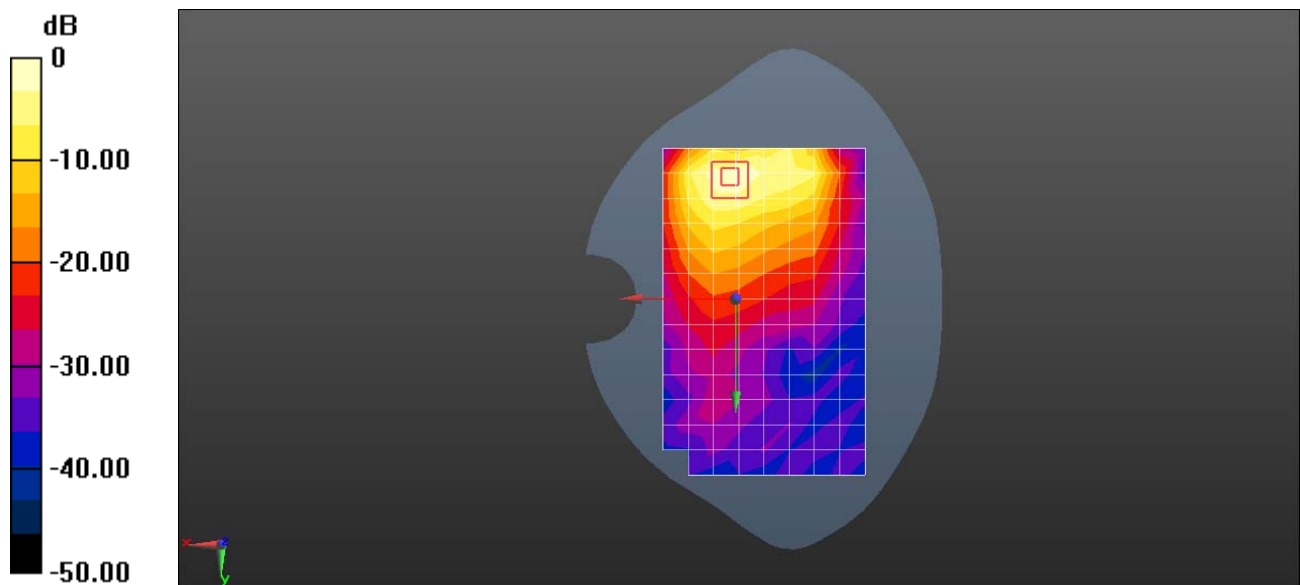

Test Laboratory: HUAWEI SAR/HAC Lab

MHA-L29 UMTS Band IV 1513CH Right touch-Main Antenna

DUT: MHA-L29; Type: Smart Phone; Serial: SAR2

Communication System: UID 0, HW-UMTS-FDD(WCDMA) (0); Frequency: 1752.6 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1753$ MHz; $\sigma = 1.35$ S/m; $\epsilon_r = 39.589$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY Configuration:

- ε Probe: EX3DV4 - SN3736; ConvF(8.3, 8.3, 8.3); Calibrated: 2017-4-27;
- ε Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- ε Electronics: DAE4 Sn852; Calibrated: 2017-4-27
- ε Phantom: SAM3; Type: SAM; Serial: TP-1597
- ε DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Head/Area Scan (9x14x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 0.551 W/kg


Configuration/Head/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 6.364 V/m; Power Drift = -0.13 dB

Peak SAR (extrapolated) = 0.677 W/kg

SAR(1 g) = 0.464 W/kg; SAR(10 g) = 0.305 W/kg

Maximum value of SAR (measured) = 0.604 W/kg

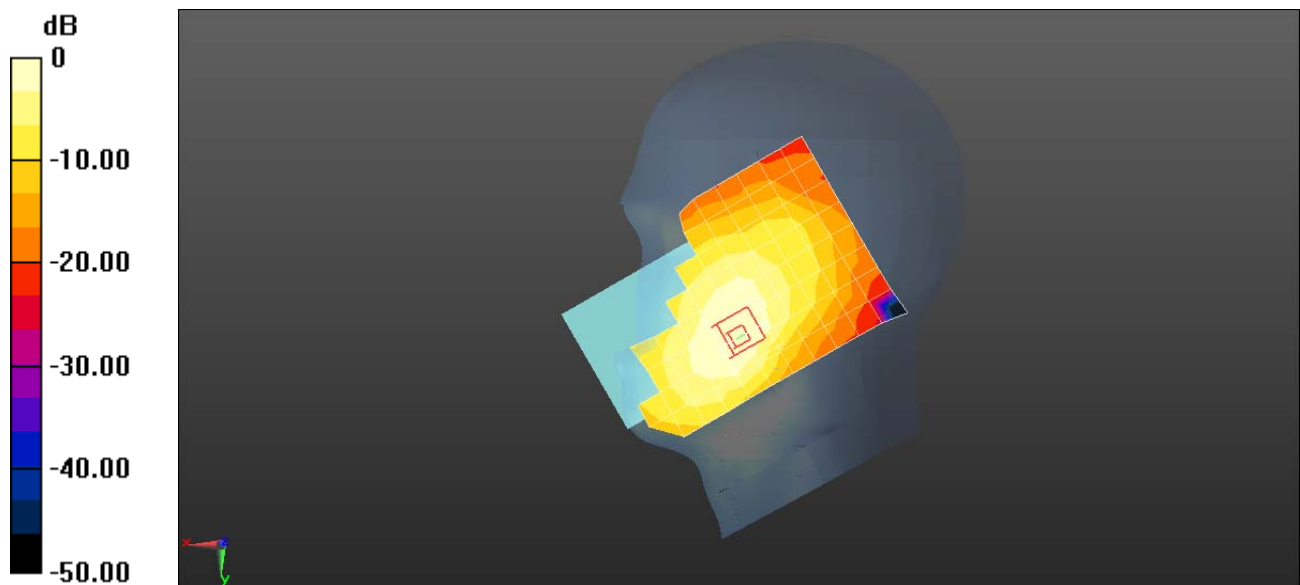

0 dB = 0.551 W/kg = -2.59 dBW/kg

Test Laboratory: HUAWEI SAR/HAC Lab

MHA-L29 UMTS Band IV 1413CH Front side 15mm-Main Antenna

DUT: MHA-L29; Type: Smart Phone; Serial: SAR2

Communication System: UID 0, HW-UMTS-FDD(WCDMA) (0); Frequency: 1732.6 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1733 \text{ MHz}$; $\sigma = 1.411 \text{ S/m}$; $\epsilon_r = 51.765$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY Configuration:

- ε Probe: EX3DV4 - SN3736; ConvF(7.8, 7.8, 7.8); Calibrated: 2017-4-27;
- ε Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- ε Electronics: DAE4 Sn852; Calibrated: 2017-4-27
- ε Phantom: SAM4; Type: SAM; Serial: TP-1620
- ε DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Body/Area Scan (9x14x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (measured) = 0.340 W/kg

Configuration/Body/Zoom Scan (6x6x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 7.718 V/m ; Power Drift = 0.14 dB

Peak SAR (extrapolated) = 0.408 W/kg

SAR(1 g) = 0.269 W/kg ; SAR(10 g) = 0.183 W/kg

Maximum value of SAR (measured) = 0.357 W/kg



Configuration/Body/Zoom Scan (6x6x7)/Cube 1: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 7.718 V/m ; Power Drift = 0.14 dB

Peak SAR (extrapolated) = 0.329 W/kg

SAR(1 g) = 0.215 W/kg ; SAR(10 g) = 0.144 W/kg

Maximum value of SAR (measured) = 0.287 W/kg

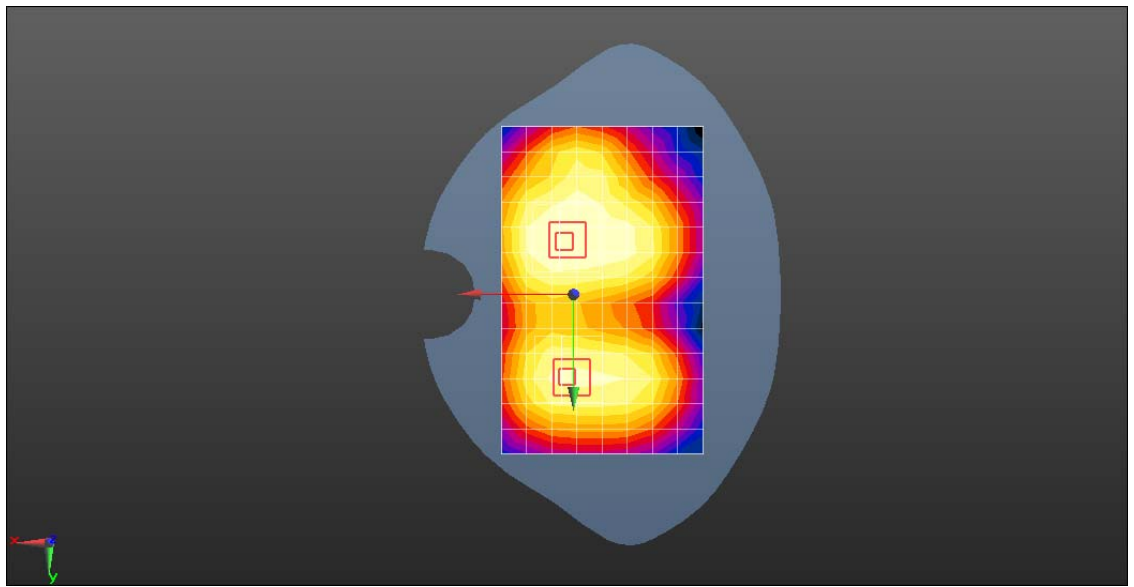

0 dB = 0.340 W/kg = -4.69 dBW/kg

Test Laboratory: HUAWEI SAR/HAC Lab

MHA-L29 UMTS Band IV 1413CH Back side 10mm-Main Antenna

DUT: MHA-L29; Type: Smart Phone; Serial: SAR2

Communication System: UID 0, HW-UMTS-FDD(WCDMA) (0); Frequency: 1732.6 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1733 \text{ MHz}$; $\sigma = 1.411 \text{ S/m}$; $\epsilon_r = 51.765$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY Configuration:

- ε Probe: EX3DV4 - SN3736; ConvF(7.8, 7.8, 7.8); Calibrated: 2017-4-27;
- ε Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- ε Electronics: DAE4 Sn852; Calibrated: 2017-4-27
- ε Phantom: SAM4; Type: SAM; Serial: TP-1620
- ε DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Body/Area Scan (9x14x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (measured) = 0.471 W/kg

Configuration/Body/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 8.782 V/m ; Power Drift = -0.01 dB

Peak SAR (extrapolated) = 0.571 W/kg

SAR(1 g) = 0.377 W/kg ; SAR(10 g) = 0.242 W/kg

Maximum value of SAR (measured) = 0.489 W/kg



Configuration/Body/Zoom Scan (5x5x7)/Cube 1: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 8.782 V/m ; Power Drift = -0.01 dB

Peak SAR (extrapolated) = 0.531 W/kg

SAR(1 g) = 0.351 W/kg ; SAR(10 g) = 0.240 W/kg

Maximum value of SAR (measured) = 0.462 W/kg

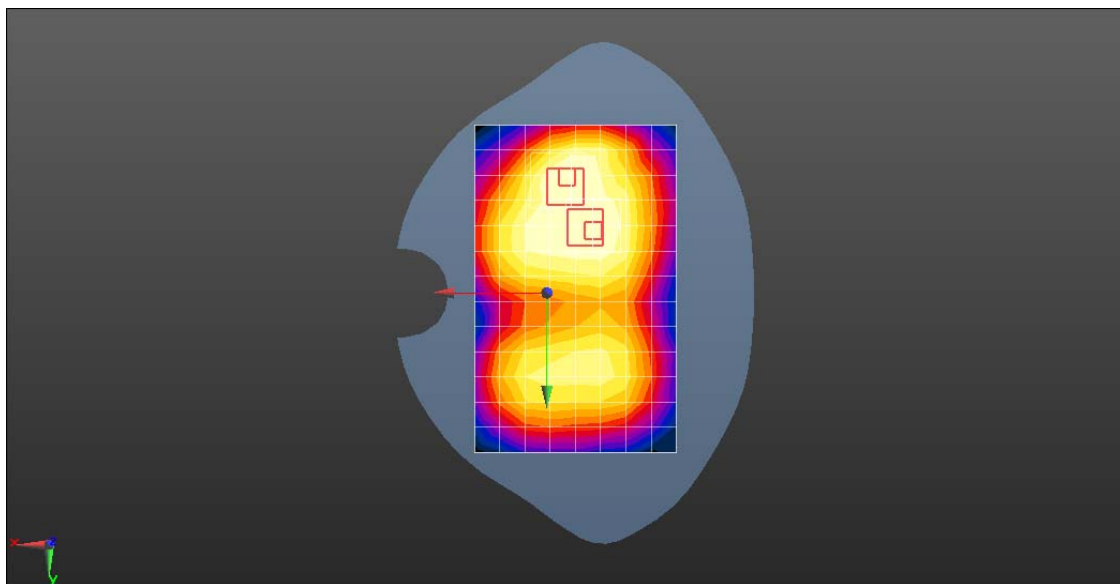

0 dB = 0.471 W/kg = -3.27 dBW/kg

Test Laboratory: HUAWEI SAR/HAC Lab

MHA-L29 UMTS Band V 4233CH Right touch-Main Antenna

DUT: MHA-L29; Type: Smart Phone; Serial: SAR2

Communication System: UID 0, HW-UMTS-FDD(WCDMA) (0); Frequency: 846.6 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 847$ MHz; $\sigma = 0.909$ S/m; $\epsilon_r = 41.759$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY Configuration:

- ε Probe: EX3DV4 - SN3736; ConvF(9.22, 9.22, 9.22); Calibrated: 2017-4-27;
- ε Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- ε Electronics: DAE4 Sn852; Calibrated: 2017-4-27
- ε Phantom: SAM3; Type: SAM; Serial: TP-1597
- ε DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Head/Area Scan (9x14x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 0.313 W/kg


Configuration/Head/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 7.985 V/m; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 0.340 W/kg

SAR(1 g) = 0.269 W/kg; SAR(10 g) = 0.208 W/kg

Maximum value of SAR (measured) = 0.316 W/kg

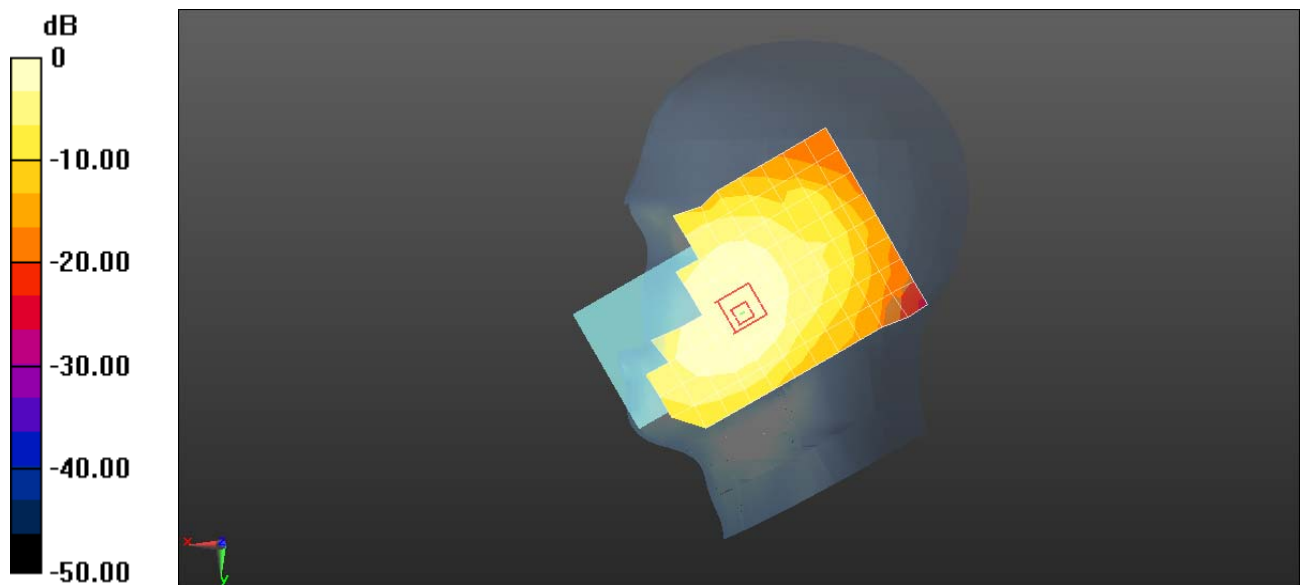

0 dB = 0.313 W/kg = -5.04 dBW/kg

Test Laboratory: HUAWEI SAR/HAC Lab

MHA-L29 UMTS Band V 4182CH Back side 15mm-Main Antenna

DUT: MHA-L29; Type: Smart Phone; Serial: SAR2

Communication System: UID 0, HW-UMTS-FDD(WCDMA) (0); Frequency: 836.4 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 836.4$ MHz; $\sigma = 0.952$ S/m; $\epsilon_r = 54.253$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- ε Probe: EX3DV4 - SN3736; ConvF(9.36, 9.36, 9.36); Calibrated: 2017-4-27;
- ε Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- ε Electronics: DAE4 Sn852; Calibrated: 2017-4-27
- ε Phantom: SAM4; Type: SAM; Serial: TP-1620
- ε DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Body/Area Scan (9x14x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.307 W/kg

Configuration/Body/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm


Reference Value = 16.39 V/m; Power Drift = -0.02 dB

Peak SAR (extrapolated) = 0.347 W/kg

SAR(1 g) = 0.262 W/kg; SAR(10 g) = 0.201 W/kg

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.318 W/kg

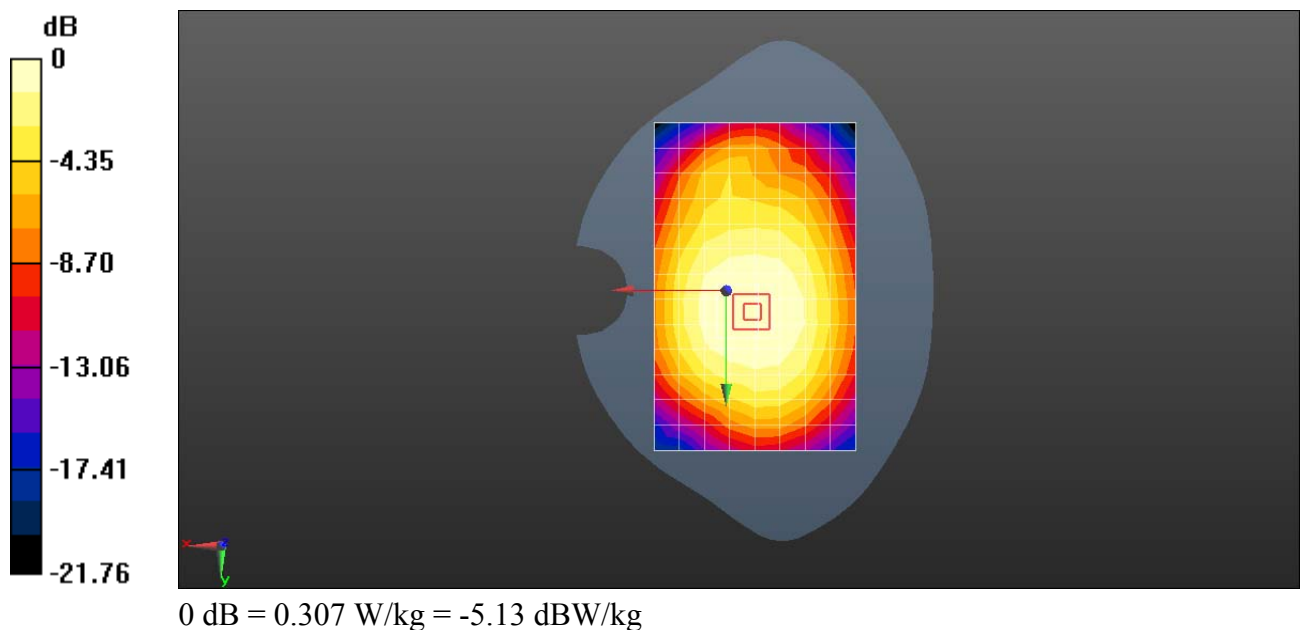

Test Laboratory: HUAWEI SAR/HAC Lab

MHA-L29 UMTS Band V 4182CH Right side 10mm-Main Antenna

DUT: MHA-L29; Type: Smart Phone; Serial: SAR2

Communication System: UID 0, HW-UMTS-FDD(WCDMA) (0); Frequency: 836.4 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 836.4$ MHz; $\sigma = 0.952$ S/m; $\epsilon_r = 54.253$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- ε Probe: EX3DV4 - SN3736; ConvF(9.36, 9.36, 9.36); Calibrated: 2017-4-27;
- ε Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- ε Electronics: DAE4 Sn852; Calibrated: 2017-4-27
- ε Phantom: SAM4; Type: SAM; Serial: TP-1620
- ε DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Body/Area Scan (5x14x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.310 W/kg

Configuration/Body/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm


Reference Value = 15.58 V/m; Power Drift = -0.11 dB

Peak SAR (extrapolated) = 0.369 W/kg

SAR(1 g) = 0.247 W/kg; SAR(10 g) = 0.168 W/kg

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.327 W/kg

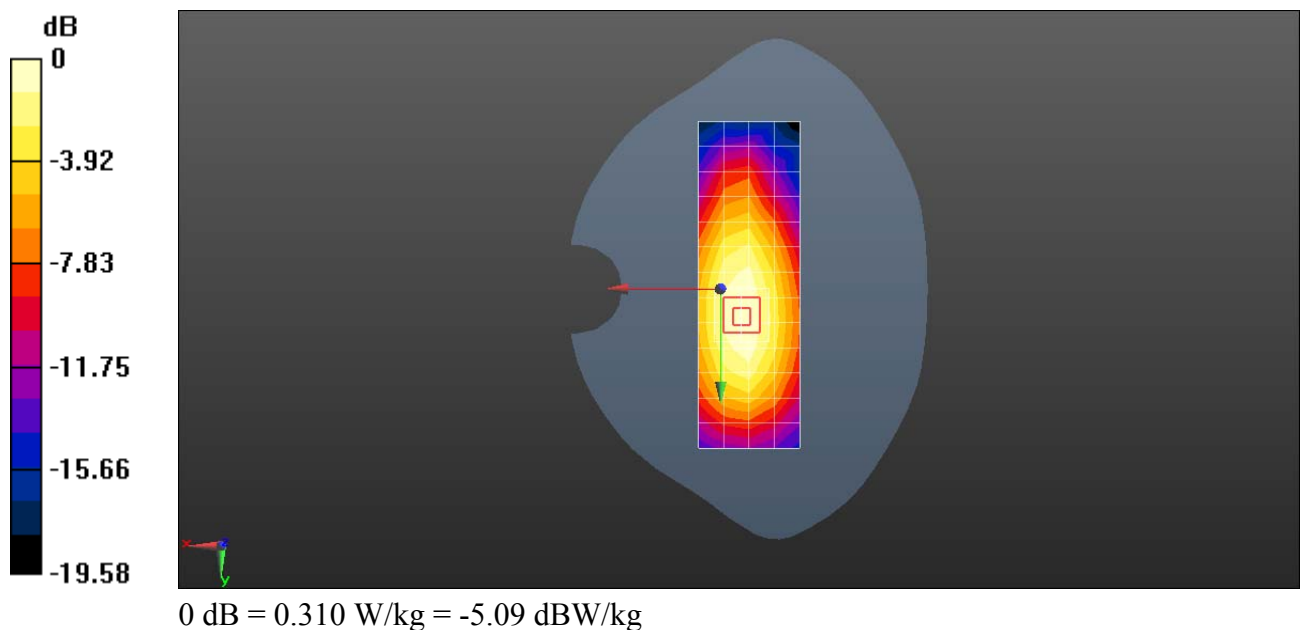

Test Laboratory: HUAWEI SAR/HAC Lab

MHA-L29 LTE Band II 20M QPSK 1RB 50 offset 18700CH Right touch-Main Antenna

DUT: MHA-L29; Type: Smart Phone; Serial: SAR2

Communication System: UID 0, LTE-FDD (SC-FDMA, 20MHz, QPSK/16-QAM) (0); Frequency: 1860 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1860$ MHz; $\sigma = 1.373$ S/m; $\epsilon_r = 39.446$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY Configuration:

- ε Probe: EX3DV4 - SN3736; ConvF(7.73, 7.73, 7.73); Calibrated: 2017-4-27;
- ε Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- ε Electronics: DAE4 Sn852; Calibrated: 2017-4-27
- ε Phantom: SAM3; Type: SAM; Serial: TP-1597
- ε DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Head/Area Scan (9x14x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 0.520 W/kg


Configuration/Head/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 8.271 V/m; Power Drift = 0.05 dB

Peak SAR (extrapolated) = 0.593 W/kg

SAR(1 g) = 0.392 W/kg; SAR(10 g) = 0.250 W/kg

Maximum value of SAR (measured) = 0.511 W/kg

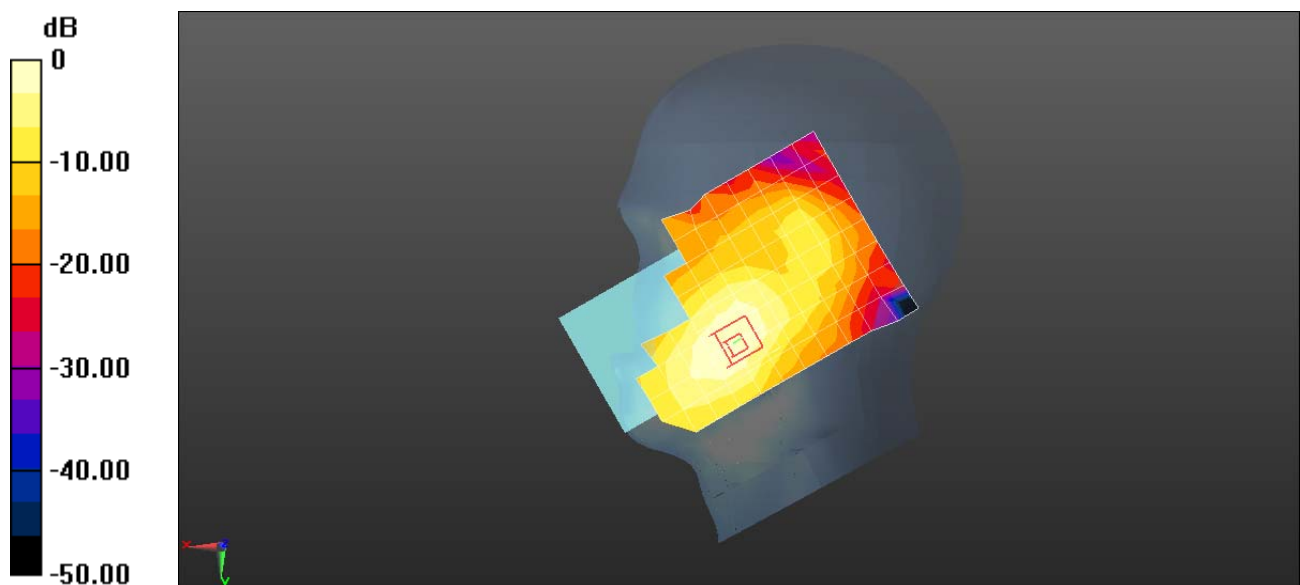

Test Laboratory: HUAWEI SAR/HAC Lab

MHA-L29 LTE Band II 20M QPSK 1RB 50 offset 18900CH Back side 15mm-Main Antenna

DUT: MHA-L29; Type: Smart Phone; Serial: SAR2

Communication System: UID 0, LTE-FDD (SC-FDMA, 20MHz, QPSK/16-QAM) (0); Frequency: 1880 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.54$ S/m; $\epsilon_r = 52.486$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- ε Probe: EX3DV4 - SN3736; ConvF(7.5, 7.5, 7.5); Calibrated: 2017-4-27;
- ε Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- ε Electronics: DAE4 Sn852; Calibrated: 2017-4-27
- ε Phantom: SAM4; Type: SAM; Serial: TP-1620
- ε DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Body/Area Scan (9x14x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 0.452 W/kg


Configuration/Body/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 5.305 V/m; Power Drift = -0.00 dB

Peak SAR (extrapolated) = 0.661 W/kg

SAR(1 g) = 0.383 W/kg; SAR(10 g) = 0.214 W/kg

Maximum value of SAR (measured) = 0.554 W/kg

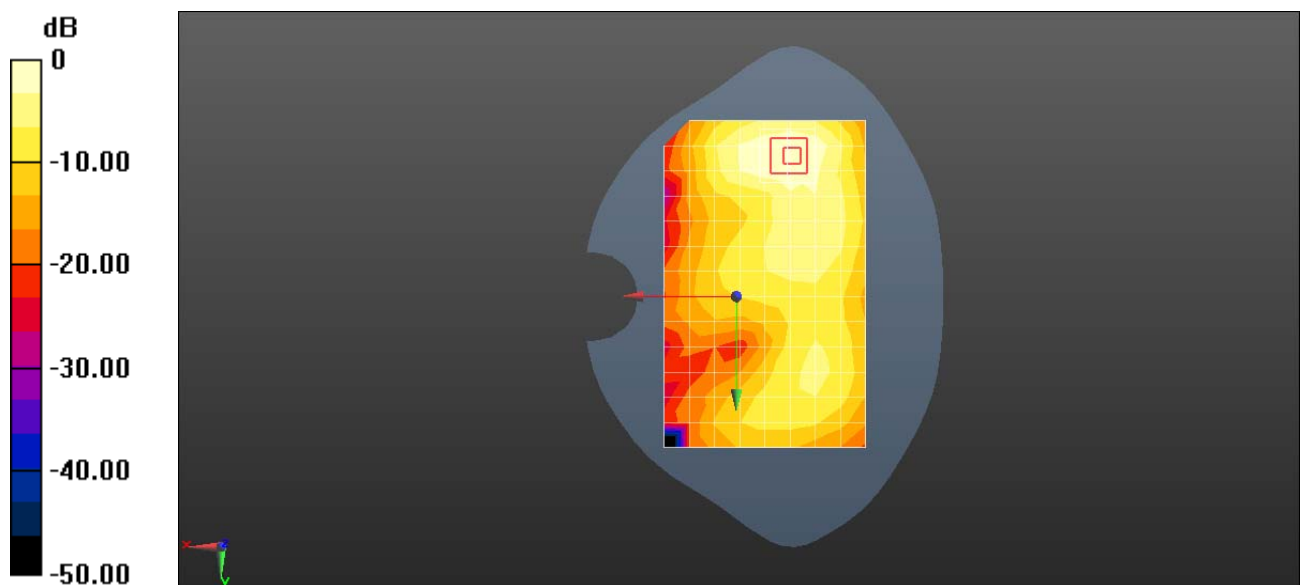

0 dB = 0.452 W/kg = -3.45 dBW/kg

Test Laboratory: HUAWEI SAR/HAC Lab

MHA-L29 LTE Band II 20M QPSK 1RB 50 offset 18700CH Bottom side 10mm- Main Antenna

DUT: MHA-L29; Type: Smart Phone; Serial: SAR2

Communication System: UID 0, LTE-FDD (SC-FDMA, 20MHz, QPSK/16-QAM) (0); Frequency: 1860 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1860$ MHz; $\sigma = 1.527$ S/m; $\epsilon_r = 52.517$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- ε Probe: EX3DV4 - SN3736; ConvF(7.5, 7.5, 7.5); Calibrated: 2017-4-27;
- ε Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- ε Electronics: DAE4 Sn852; Calibrated: 2017-4-27
- ε Phantom: SAM4; Type: SAM; Serial: TP-1620
- ε DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Body/Area Scan (5x11x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 1.21 W/kg


Configuration/Body/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 24.36 V/m; Power Drift = -0.17 dB

Peak SAR (extrapolated) = 1.46 W/kg

SAR(1 g) = 0.797 W/kg; SAR(10 g) = 0.423 W/kg

Maximum value of SAR (measured) = 1.20 W/kg

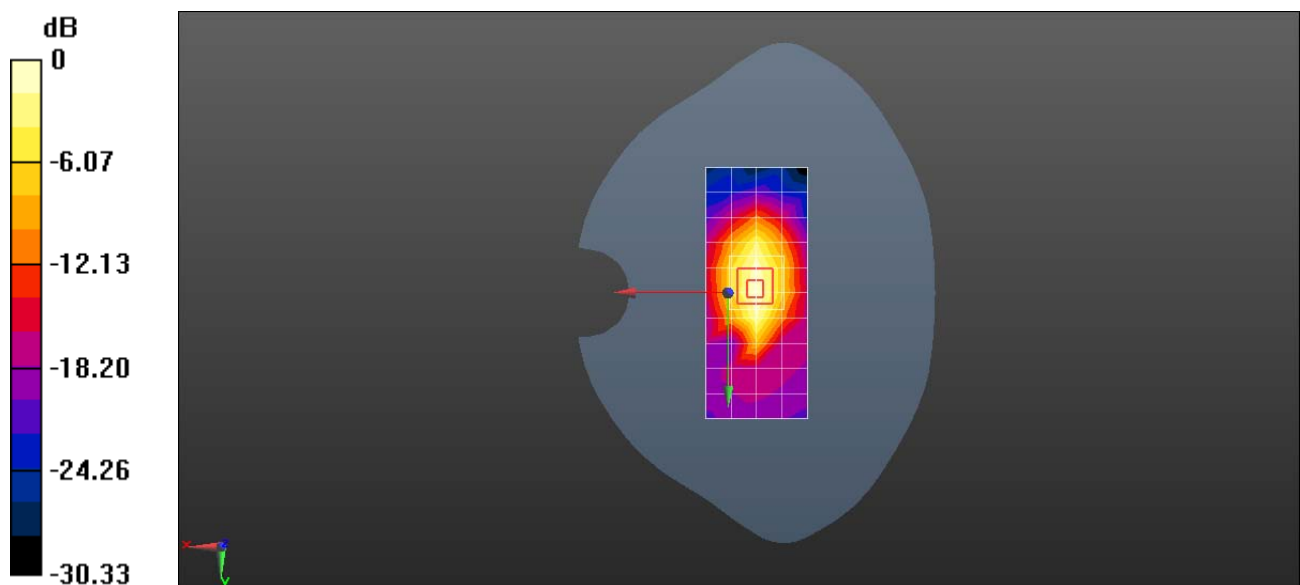

0 dB = 1.21 W/kg = 0.83 dBW/kg

Test Laboratory: HUAWEI SAR/HAC Lab

MHA-L29 LTE Band II 20M QPSK 50RB 0 offset 18900CH Bottom side 0mm-Main Antenna

DUT: MHA-L29; Type: Smart Phone; Serial: SAR2

Communication System: UID 0, LTE-FDD (SC-FDMA, 20MHz, QPSK/16-QAM) (0); Frequency: 1880 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.54$ S/m; $\epsilon_r = 52.486$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- ε Probe: EX3DV4 - SN3736; ConvF(7.5, 7.5, 7.5); Calibrated: 2017-4-27;
- ε Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- ε Electronics: DAE4 Sn852; Calibrated: 2017-4-27
- ε Phantom: SAM4; Type: SAM; Serial: TP-1620
- ε DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Body/Area Scan (5x11x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 1.08 W/kg


Configuration/Body/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 9.140 V/m; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 1.30 W/kg

SAR(1 g) = 0.434 W/kg; SAR(10 g) = 0.187 W/kg

Maximum value of SAR (measured) = 1.09 W/kg

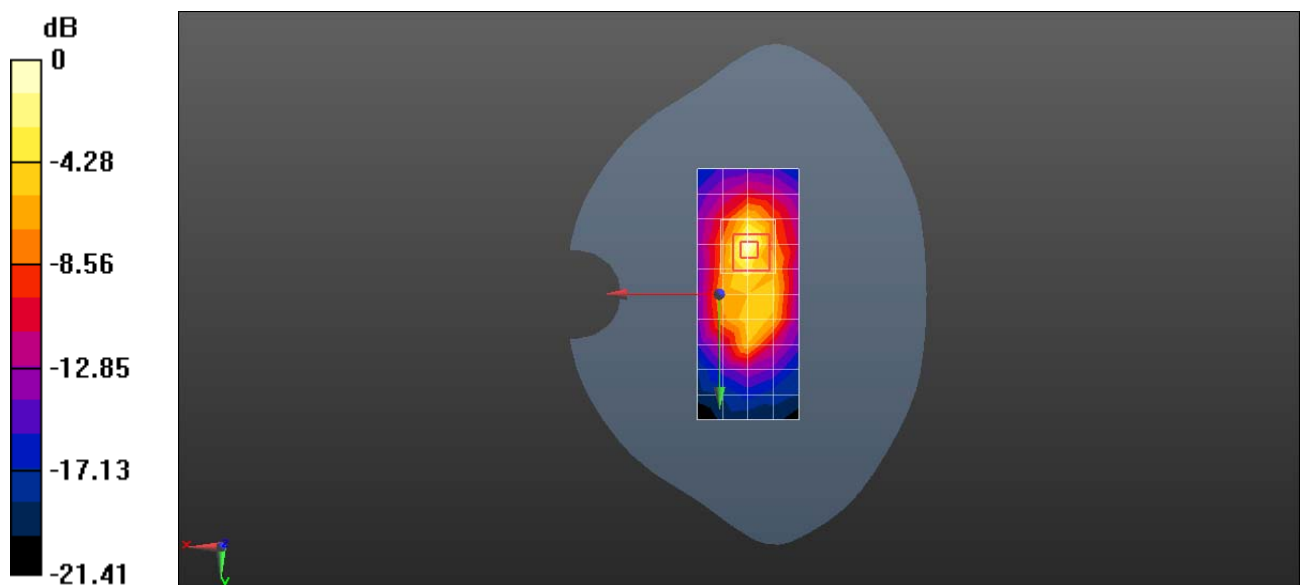

0 dB = 1.08 W/kg = 0.33 dBW/kg

Test Laboratory: HUAWEI SAR/HAC Lab

MHA-L29 LTE Band IV 20M QPSK 1RB 50 offset 20300CH Right touch-Main Antenna

DUT: MHA-L29; Type: Smart Phone; Serial: SAR1

Communication System: UID 0, LTE-FDD (SC-FDMA, 20MHz, QPSK/16-QAM) (0); Frequency: 1745 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1745$ MHz; $\sigma = 1.362$ S/m; $\epsilon_r = 38.729$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY Configuration:

- ε Probe: EX3DV4 - SN3578; ConvF(8.37, 8.37, 8.37); Calibrated: 2017-5-5;
- ε Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- ε Electronics: DAE4 Sn1236; Calibrated: 2017-7-21
- ε Phantom: SAM1; Type: SAM; Serial: TP-1475
- ε DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Head/Area Scan (8x13x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 0.906 W/kg


Configuration/Head/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 7.663 V/m; Power Drift = 0.18 dB

Peak SAR (extrapolated) = 1.03 W/kg

SAR(1 g) = 0.705 W/kg; SAR(10 g) = 0.460 W/kg

Maximum value of SAR (measured) = 0.915 W/kg

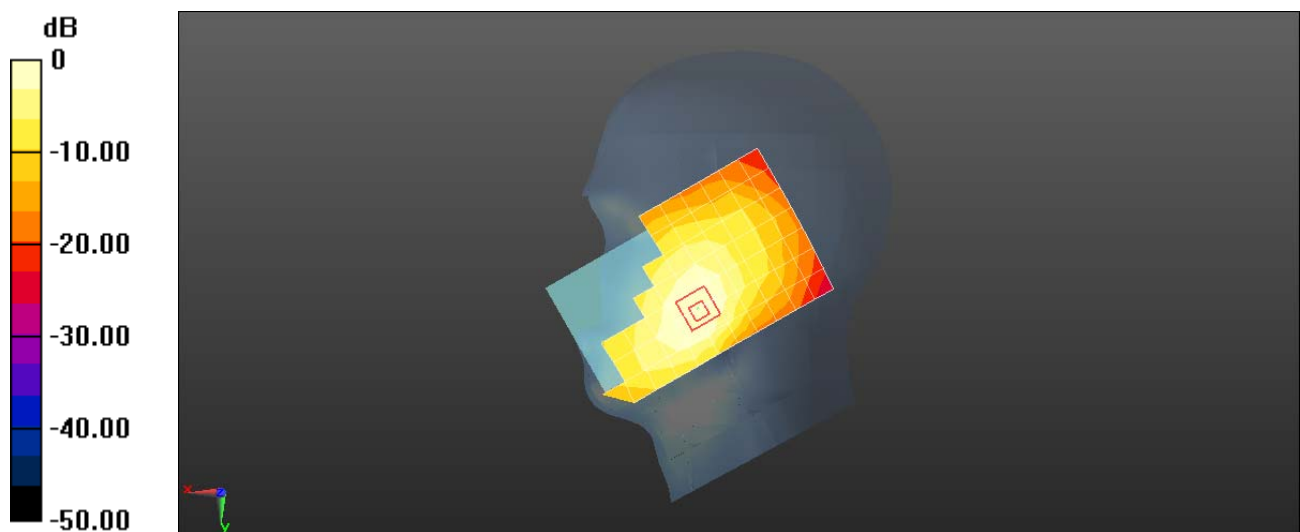

0 dB = 0.906 W/kg = -0.43 dBW/kg

Test Laboratory: HUAWEI SAR/HAC Lab

MHA-L29 LTE Band IV 20M QPSK 1RB 50 offset 20050CH Back Side 15mm-Main Antenna

DUT: MHA-L29; Type: Smart Phone; Serial: SAR1

Communication System: UID 0, LTE-FDD (SC-FDMA, 20MHz, QPSK/16-QAM) (0); Frequency: 1720 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1720$ MHz; $\sigma = 1.411$ S/m; $\epsilon_r = 51.678$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- ε Probe: ES3DV3 - SN3168; ConvF(5.22, 5.22, 5.22); Calibrated: 2016-9-27;
- ε Sensor-Surface: 3mm (Mechanical Surface Detection), $z = 2.0, 32.0$
- ε Electronics: DAE4 Sn851; Calibrated: 2016-7-22
- ε Phantom: SAM2; Type: SAM; Serial: TP:1474
- ε DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Body/Area Scan (9x14x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 0.301 W/kg

Configuration/Body/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 13.61 V/m; Power Drift = 0.00 dB

Peak SAR (extrapolated) = 0.388 W/kg

SAR(1 g) = 0.267 W/kg; SAR(10 g) = 0.183 W/kg

Maximum value of SAR (measured) = 0.306 W/kg



Configuration/Body/Zoom Scan (5x5x7)/Cube 1: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 13.61 V/m; Power Drift = 0.00 dB

Peak SAR (extrapolated) = 0.355 W/kg

SAR(1 g) = 0.238 W/kg; SAR(10 g) = 0.155 W/kg

Maximum value of SAR (measured) = 0.284 W/kg

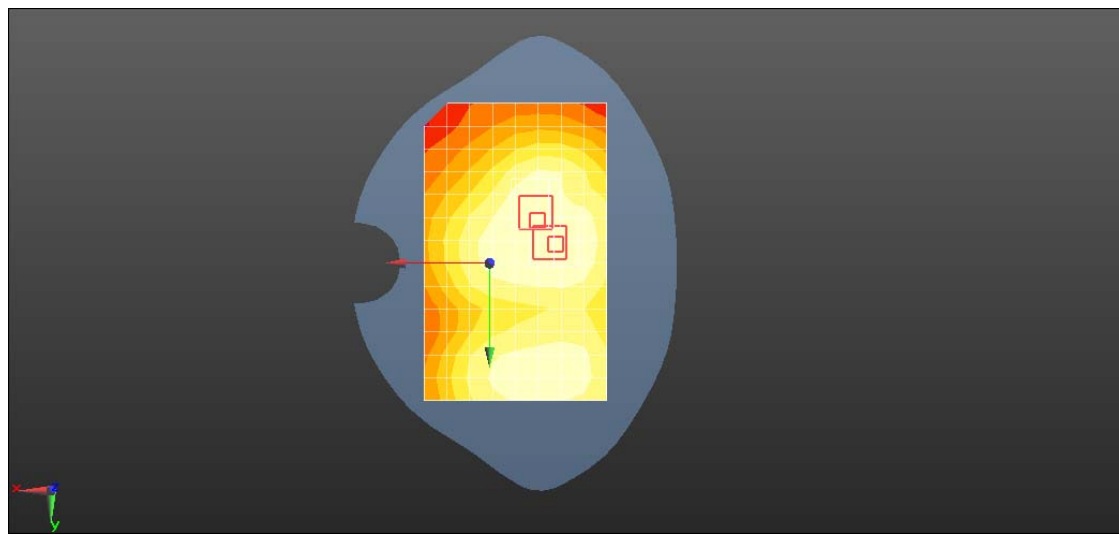

0 dB = 0.301 W/kg = -5.21 dBW/kg

Test Laboratory: HUAWEI SAR/HAC Lab

MHA-L29 LTE Band IV 20M QPSK 1RB 50 offset 20050CH Back Side 10mm-Main Antenna

DUT: MHA-L29; Type: Smart Phone; Serial: SAR1

Communication System: UID 0, LTE-FDD (SC-FDMA, 20MHz, QPSK/16-QAM) (0); Frequency: 1720 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1720$ MHz; $\sigma = 1.411$ S/m; $\epsilon_r = 51.678$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- ε Probe: ES3DV3 - SN3168; ConvF(5.22, 5.22, 5.22); Calibrated: 2016-9-27;
- ε Sensor-Surface: 3mm (Mechanical Surface Detection), $z = 2.0, 32.0$
- ε Electronics: DAE4 Sn851; Calibrated: 2016-7-22
- ε Phantom: SAM2; Type: SAM; Serial: TP:1474
- ε DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Body/Area Scan (9x14x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 0.516 W/kg

Configuration/Body/Zoom Scan (5x6x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 15.87 V/m; Power Drift = 0.10 dB

Peak SAR (extrapolated) = 0.641 W/kg

SAR(1 g) = 0.447 W/kg; SAR(10 g) = 0.291 W/kg



Configuration/Body/Zoom Scan (5x6x7)/Cube 1: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 15.87 V/m; Power Drift = 0.10 dB

Peak SAR (extrapolated) = 0.600 W/kg

SAR(1 g) = 0.420 W/kg; SAR(10 g) = 0.292 W/kg

Maximum value of SAR (measured) = 0.478 W/kg

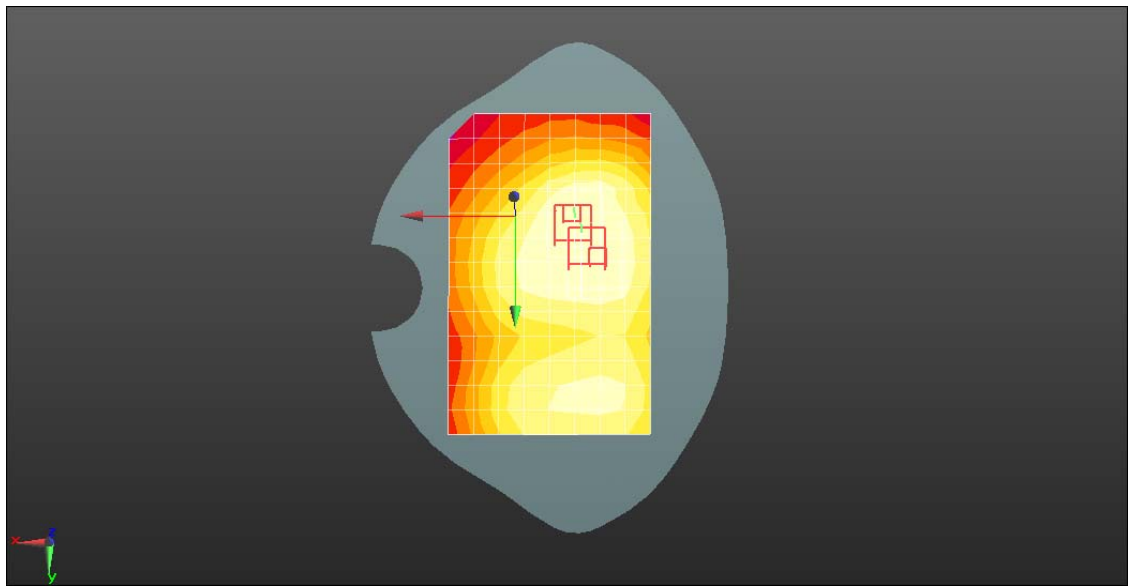

0 dB = 0.516 W/kg = -2.87 dBW/kg

Test Laboratory: HUAWEI SAR/HAC Lab

MHA-L29 LTE Band V 10M QPSK 1RB 25 offset 20600CH Right touch-Main Antenna

DUT: MHA-L29; Type: Smart Phone; Serial: SAR2

Communication System: UID 0, LTE-FDD (SC-FDMA, 10MHz, QPSK/16-QAM) (0); Frequency: 844 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 844 \text{ MHz}$; $\sigma = 0.904 \text{ S/m}$; $\epsilon_r = 41.826$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Right Section

DASY Configuration:

- ε Probe: EX3DV4 - SN3736; ConvF(9.22, 9.22, 9.22); Calibrated: 2017-4-27;
- ε Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- ε Electronics: DAE4 Sn852; Calibrated: 2017-4-27
- ε Phantom: SAM3; Type: SAM; Serial: TP-1597
- ε DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Head/Area Scan (9x14x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (measured) = 0.347 W/kg


Configuration/Head/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 8.102 V/m ; Power Drift = -0.02 dB

Peak SAR (extrapolated) = 0.366 W/kg

SAR(1 g) = 0.290 W/kg ; SAR(10 g) = 0.226 W/kg

Maximum value of SAR (measured) = 0.338 W/kg

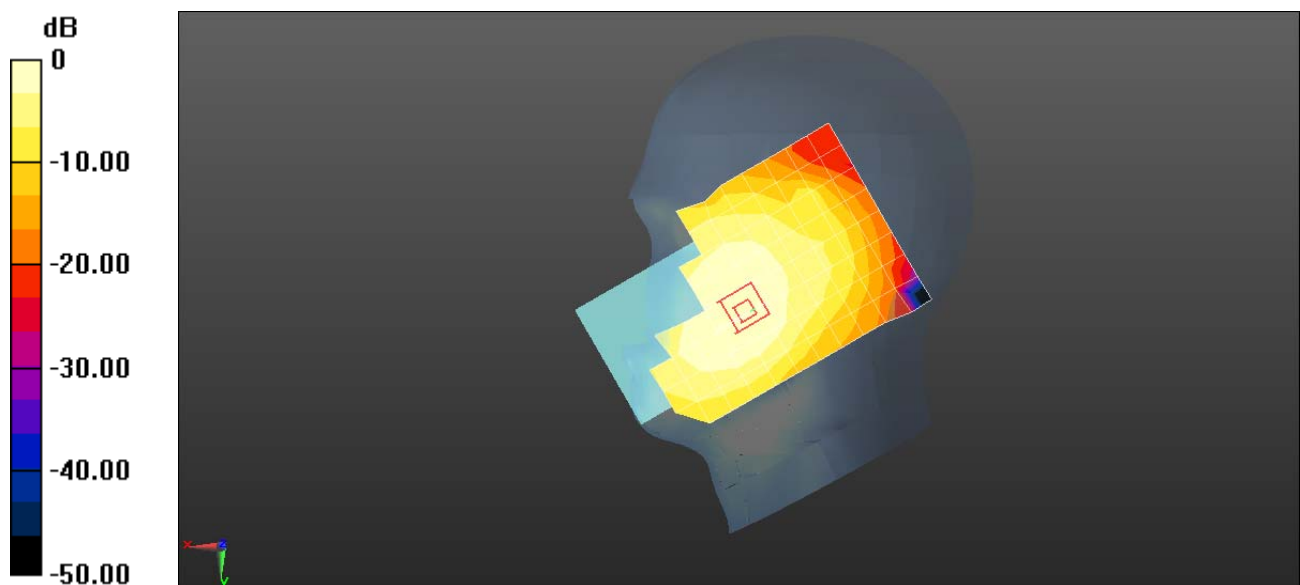

0 dB = 0.347 W/kg = -4.60 dBW/kg

Test Laboratory: HUAWEI SAR/HAC Lab

MHA-L29 LTE Band V 10M QPSK 1RB 25 offset 20600CH Back side 15mm-Main Antenna

DUT: MHA-L29; Type: Smart Phone; Serial: SAR2

Communication System: UID 0, LTE-FDD (SC-FDMA, 10MHz, QPSK/16-QAM) (0); Frequency: 844 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 844 \text{ MHz}$; $\sigma = 0.955 \text{ S/m}$; $\epsilon_r = 54.218$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY Configuration:

- ε Probe: EX3DV4 - SN3736; ConvF(9.36, 9.36, 9.36); Calibrated: 2017-4-27;
- ε Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- ε Electronics: DAE4 Sn852; Calibrated: 2017-4-27
- ε Phantom: SAM4; Type: SAM; Serial: TP-1620
- ε DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Body/Area Scan (9x14x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (measured) = 0.366 W/kg


Configuration/Body/Zoom Scan (6x6x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 17.76 V/m ; Power Drift = -0.00 dB

Peak SAR (extrapolated) = 0.410 W/kg

SAR(1 g) = 0.309 W/kg ; SAR(10 g) = 0.237 W/kg

Maximum value of SAR (measured) = 0.373 W/kg

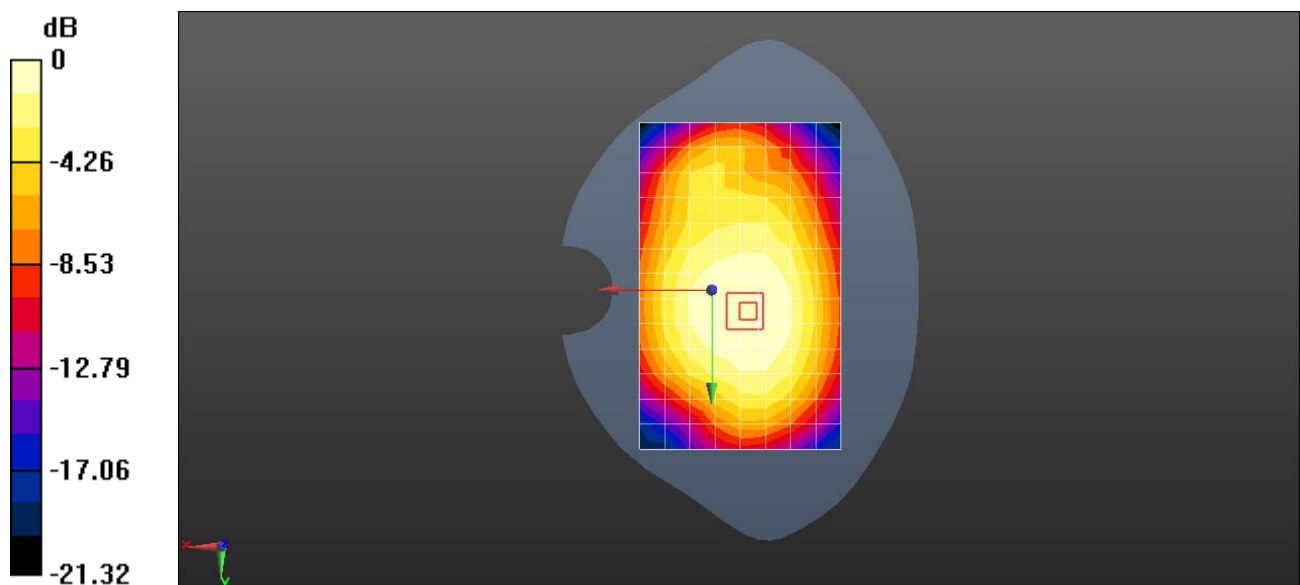

0 dB = 0.366 W/kg = -4.37 dBW/kg

Test Laboratory: HUAWEI SAR/HAC Lab

MHA-L29 LTE Band V 10M QPSK 1RB 25 offset 20600CH Right side 10mm-Main Antenna

DUT: MHA-L29; Type: Smart Phone; Serial: SAR2

Communication System: UID 0, LTE-FDD (SC-FDMA, 10MHz, QPSK/16-QAM) (0); Frequency: 844 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 844 \text{ MHz}$; $\sigma = 0.955 \text{ S/m}$; $\epsilon_r = 54.218$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY Configuration:

- ε Probe: EX3DV4 - SN3736; ConvF(9.36, 9.36, 9.36); Calibrated: 2017-4-27;
- ε Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- ε Electronics: DAE4 Sn852; Calibrated: 2017-4-27
- ε Phantom: SAM4; Type: SAM; Serial: TP-1620
- ε DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Body/Area Scan (5x14x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (measured) = 0.373 W/kg


Configuration/Body/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 16.80 V/m ; Power Drift = -0.09 dB

Peak SAR (extrapolated) = 0.461 W/kg

SAR(1 g) = 0.310 W/kg ; SAR(10 g) = 0.212 W/kg

Maximum value of SAR (measured) = 0.407 W/kg

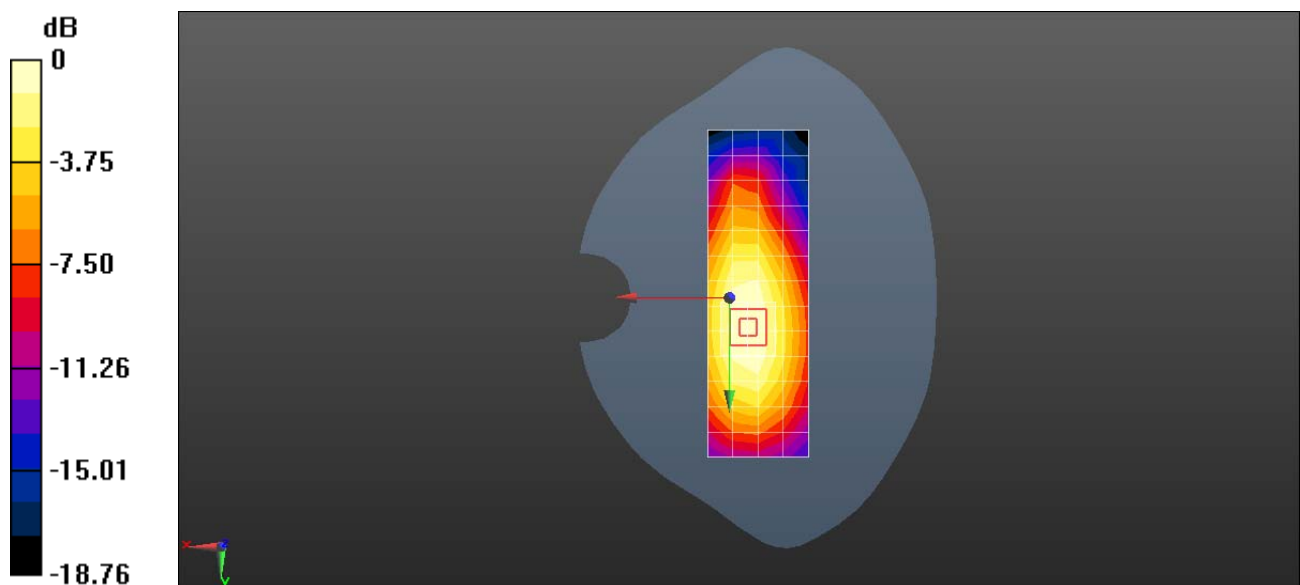

0 dB = 0.373 W/kg = -4.28 dBW/kg

Test Laboratory: HUAWEI SAR/HAC Lab

MHA-L29 LTE Band VII 20M QPSK 1RB 50 offset 20850CH Left touch-Main Antenna

DUT: MHA-L29; Type: Smart Phone; Serial: SAR1

Communication System: UID 0, LTE-FDD (SC-FDMA, 20MHz, QPSK/16-QAM) (0); Frequency: 2510 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 2510$ MHz; $\sigma = 1.893$ S/m; $\epsilon_r = 38.397$; $\rho = 1000$ kg/m³

Phantom section: Left Section

DASY Configuration:

- ε Probe: EX3DV4 - SN3578; ConvF(7.44, 7.44, 7.44); Calibrated: 2017-5-5;
- ε Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- ε Electronics: DAE4 Sn918; Calibrated: 2017-6-26
- ε Phantom: SAM1; Type: SAM; Serial: TP-1475
- ε DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Head/Area Scan (10x16x1): Measurement grid: $dx=12$ mm, $dy=12$ mm

Maximum value of SAR (measured) = 0.452 W/kg


Configuration/Head/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 4.594 V/m; Power Drift = 0.06 dB

Peak SAR (extrapolated) = 0.580 W/kg

SAR(1 g) = 0.336 W/kg; SAR(10 g) = 0.186 W/kg

Maximum value of SAR (measured) = 0.495 W/kg

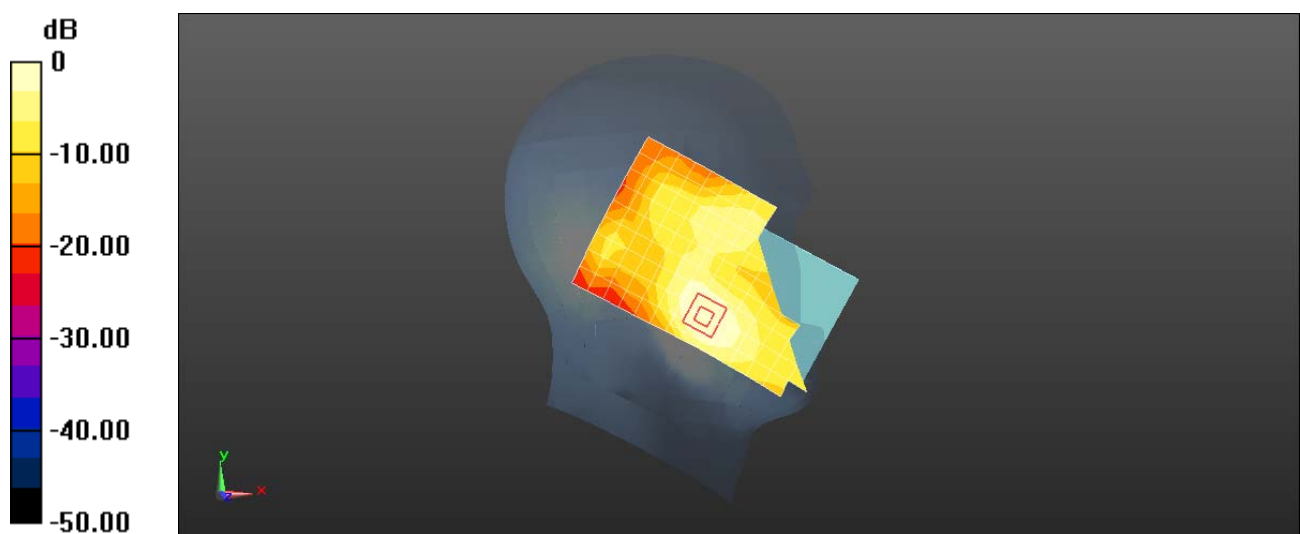

0 dB = 0.452 W/kg = -3.45 dBW/kg

Test Laboratory: HUAWEI SAR/HAC Lab

MHA-L29 LTE Band VII 20M QPSK 1RB 50 offset 20850CH Front side 15mm- Main Antenna

DUT: MHA-L29; Type: Smart Phone; Serial: SAR2

Communication System: UID 0, LTE-FDD (SC-FDMA, 20MHz, QPSK/16-QAM) (0); Frequency: 2510 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 2510$ MHz; $\sigma = 2.095$ S/m; $\epsilon_r = 50.728$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- ε Probe: EX3DV4 - SN3736; ConvF(7.21, 7.21, 7.21); Calibrated: 2017-4-27;
- ε Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- ε Electronics: DAE4 Sn852; Calibrated: 2017-4-27
- ε Phantom: SAM4; Type: SAM; Serial: TP-1620
- ε DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Body/Area Scan (11x18x1): Measurement grid: $dx=12$ mm, $dy=12$ mm

Maximum value of SAR (measured) = 0.416 W/kg


Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 5.448 V/m; Power Drift = -0.14 dB

Peak SAR (extrapolated) = 0.568 W/kg

SAR(1 g) = 0.310 W/kg; SAR(10 g) = 0.166 W/kg

Maximum value of SAR (measured) = 0.471 W/kg

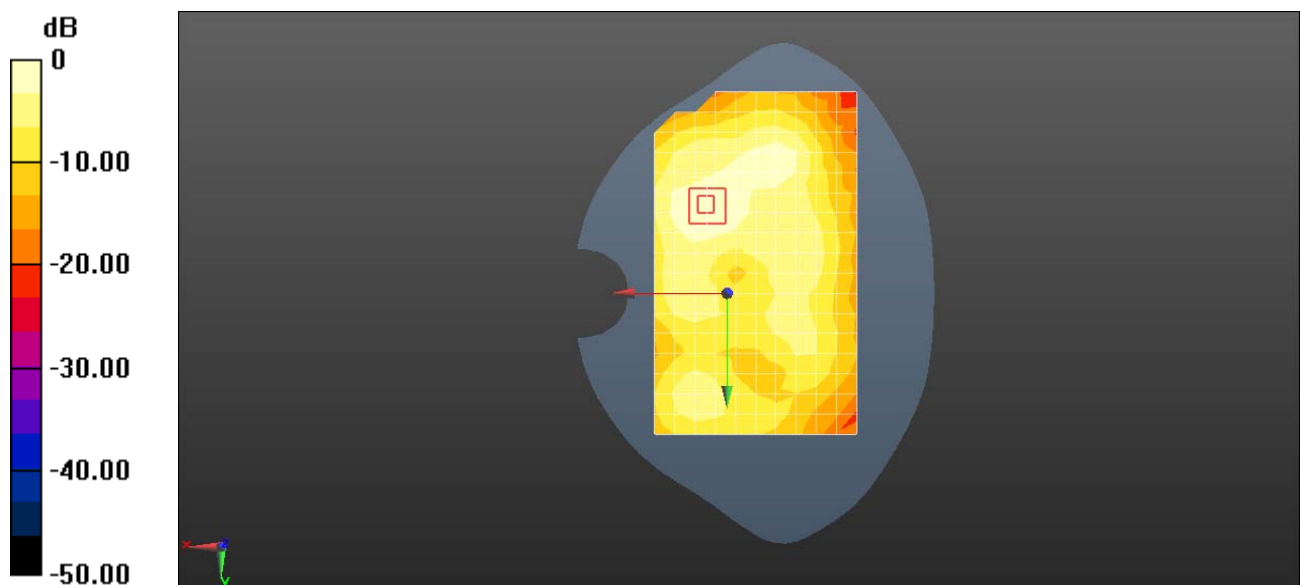

0 dB = 0.416 W/kg = -3.81 dBW/kg

Test Laboratory: HUAWEI SAR/HAC Lab

**MHA-L29 LTE Band VII 20M QPSK 1RB 50 offset 20850CH Front side 10mm
-Main Antenna**

DUT: MHA-L29; Type: Smart Phone; Serial: SAR1

Communication System: UID 0, LTE-FDD (SC-FDMA, 20MHz, QPSK/16-QAM) (0); Frequency: 2510 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 2510 \text{ MHz}$; $\sigma = 2.043 \text{ S/m}$; $\epsilon_r = 50.6$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY Configuration:

- ε Probe: EX3DV4 - SN3578; ConvF(7.43, 7.43, 7.43); Calibrated: 2017-5-5;
- ε Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- ε Electronics: DAE4 Sn918; Calibrated: 2017-6-26
- ε Phantom: SAM2; Type: SAM; Serial: TP:1474
- ε DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Body/Area Scan (11x17x1): Measurement grid: $dx=12\text{mm}$, $dy=12\text{mm}$

Maximum value of SAR (measured) = 0.928 W/kg

Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$

Reference Value = 7.102 V/m ; Power Drift = -0.03 dB

Peak SAR (extrapolated) = 1.28 W/kg

SAR(1 g) = 0.630 W/kg ; SAR(10 g) = 0.295 W/kg

Maximum value of SAR (measured) = 1.04 W/kg



Configuration/Body/Zoom Scan (7x7x7)/Cube 1: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$

Reference Value = 7.102 V/m ; Power Drift = -0.03 dB

Peak SAR (extrapolated) = 1.22 W/kg

SAR(1 g) = 0.679 W/kg ; SAR(10 g) = 0.348 W/kg

Maximum value of SAR (measured) = 1.01 W/kg

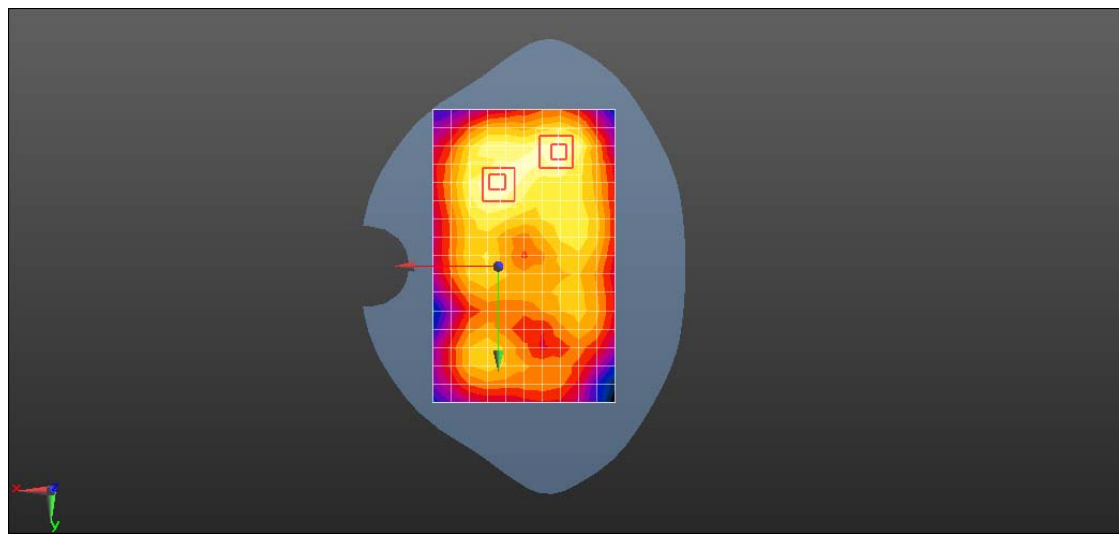

0 dB = 0.928 W/kg = -0.32 dBW/kg

Test Laboratory: HUAWEI SAR/HAC Lab

MHA-L29 LTE Band XII 10M QPSK 1RB 25 offset 23060CH Right touch-Main Antenna

DUT: MHA-L29; Type: Smart Phone; Serial: SAR1

Communication System: UID 0, LTE-FDD (SC-FDMA, 10MHz, QPSK/16-QAM) (0); Frequency: 704 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 704 \text{ MHz}$; $\sigma = 0.908 \text{ S/m}$; $\epsilon_r = 42.526$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Right Section

DASY Configuration:

- ε Probe: ES3DV3 - SN3168; ConvF(6.93, 6.93, 6.93); Calibrated: 2016-9-27;
- ε Sensor-Surface: 3mm (Mechanical Surface Detection), $z = 2.0, 32.0$
- ε Electronics: DAE4 Sn851; Calibrated: 2016-7-22
- ε Phantom: SAM1; Type: SAM; Serial: TP-1475
- ε DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Head/Area Scan (10x17x1): Measurement grid: $dx=12\text{mm}$, $dy=12\text{mm}$

Maximum value of SAR (measured) = 0.290 W/kg


Configuration/Head/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$

Reference Value = 7.000 V/m ; Power Drift = 0.04 dB

Peak SAR (extrapolated) = 0.328 W/kg

SAR(1 g) = 0.268 W/kg ; SAR(10 g) = 0.209 W/kg

Maximum value of SAR (measured) = 0.293 W/kg

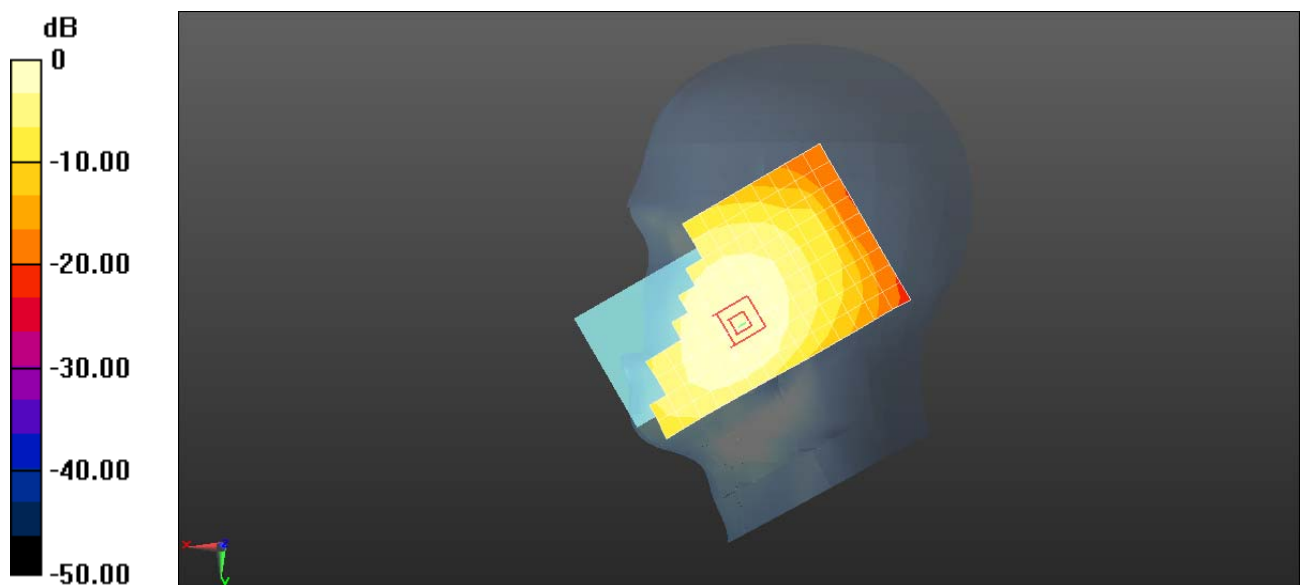

0 dB = 0.290 W/kg = -5.38 dBW/kg

Test Laboratory: HUAWEI SAR/HAC Lab

MHA-L29 LTE Band XII 10M QPSK 25RB 13 offset 23130CH Back Side 15mm- Main Antenna

DUT: MHA-L29; Type: Smart Phone; Serial: SAR1

Communication System: UID 0, LTE-FDD (SC-FDMA, 10MHz, QPSK/16-QAM) (0); Frequency: 711 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 711 \text{ MHz}$; $\sigma = 0.956 \text{ S/m}$; $\epsilon_r = 56.154$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY Configuration:

- ε Probe: ES3DV3 - SN3168; ConvF(6.45, 6.45, 6.45); Calibrated: 2016-9-27;
- ε Sensor-Surface: 3mm (Mechanical Surface Detection), $z = 2.0, 32.0$
- ε Electronics: DAE4 Sn851; Calibrated: 2016-7-22
- ε Phantom: SAM2; Type: SAM; Serial: TP:1474
- ε DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Body/Area Scan (9x14x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (measured) = 0.174 W/kg


Configuration/Body/Zoom Scan (6x6x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 12.75 V/m ; Power Drift = -0.03 dB

Peak SAR (extrapolated) = 0.212 W/kg

SAR(1 g) = 0.163 W/kg ; SAR(10 g) = 0.125 W/kg

Maximum value of SAR (measured) = 0.178 W/kg

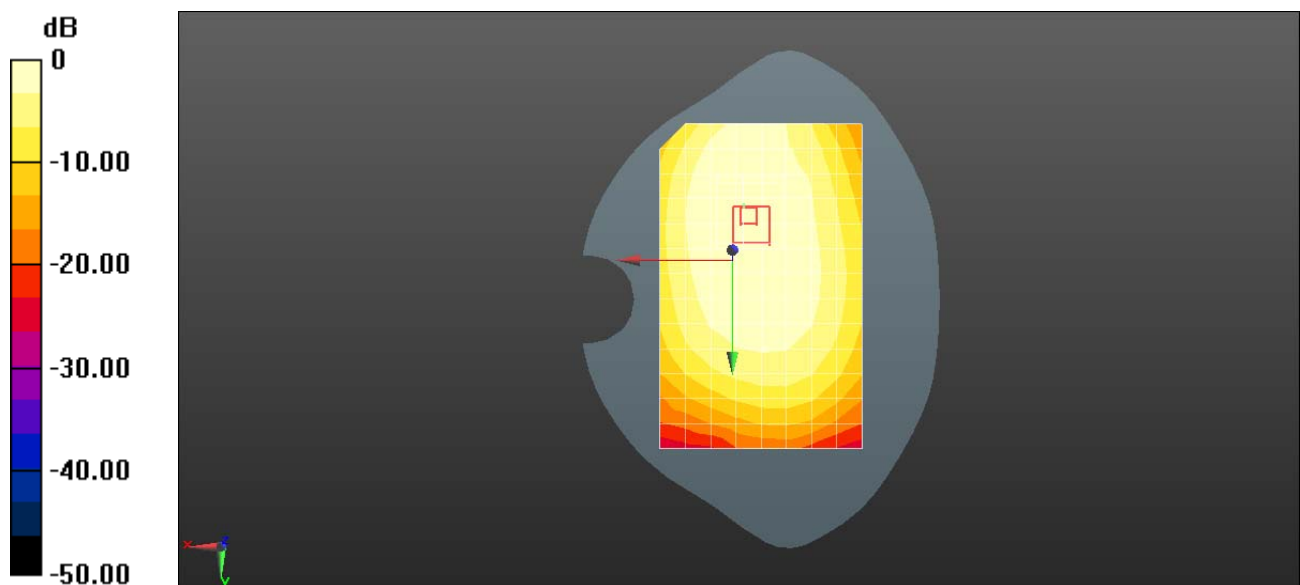

0 dB = 0.174 W/kg = -7.59 dBW/kg

Test Laboratory: HUAWEI SAR/HAC Lab

MHA-L29 LTE Band XII 10M QPSK 25RB 13 offset 23095CH Right Side 10mm-Main Antenna

DUT: MHA-L29; Type: Smart Phone; Serial: SAR1

Communication System: UID 0, LTE-FDD (SC-FDMA, 10MHz, QPSK/16-QAM) (0); Frequency: 707.5 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 707.5$ MHz; $\sigma = 0.955$ S/m; $\epsilon_r = 56.161$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- ε Probe: ES3DV3 - SN3168; ConvF(6.45, 6.45, 6.45); Calibrated: 2016-9-27;
- ε Sensor-Surface: 3mm (Mechanical Surface Detection), $z = 2.0, 32.0$
- ε Electronics: DAE4 Sn851; Calibrated: 2016-7-22
- ε Phantom: SAM2; Type: SAM; Serial: TP:1474
- ε DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Body/Area Scan (5x14x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.261 W/kg

Configuration/Body/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm


Reference Value = 17.16 V/m; Power Drift = -0.12 dB

Peak SAR (extrapolated) = 0.337 W/kg

SAR(1 g) = 0.231 W/kg; SAR(10 g) = 0.160 W/kg

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.266 W/kg

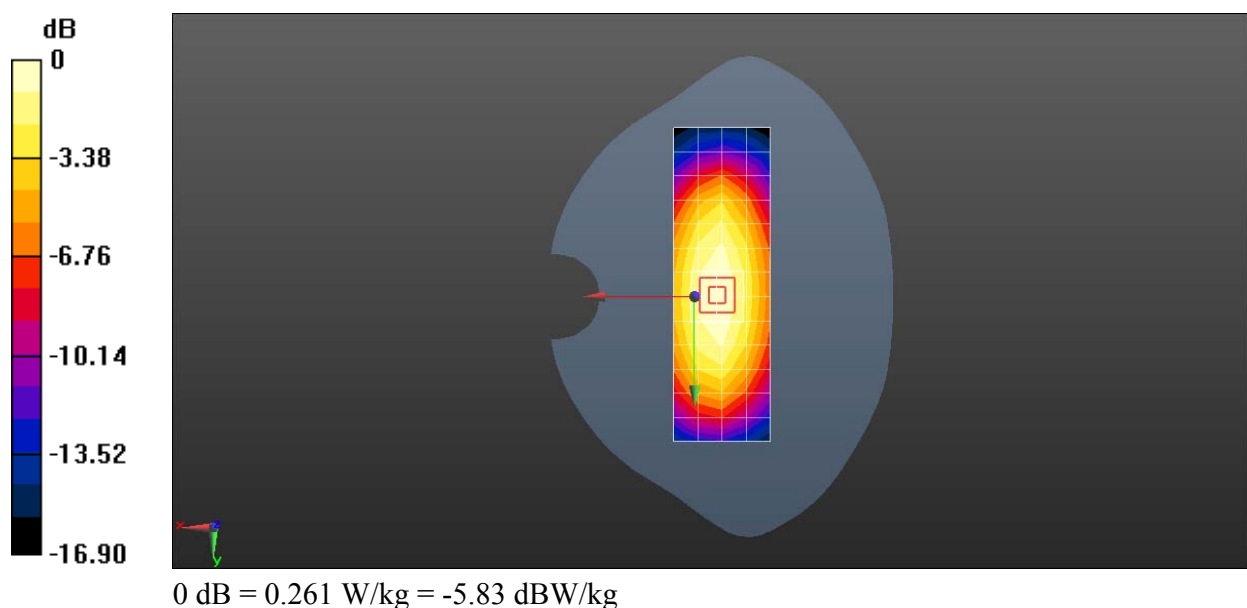

Test Laboratory: HUAWEI SAR/HAC Lab

MHA-L29 LTE Band XVII 10M QPSK 1RB 25 offset 23800CH Right touch-Main Antenna

DUT: MHA-L29; Type: Smart Phone; Serial: SAR1

Communication System: UID 0, LTE-FDD (SC-FDMA, 10MHz, QPSK/16-QAM) (0); Frequency: 711 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 711 \text{ MHz}$; $\sigma = 0.91 \text{ S/m}$; $\epsilon_r = 42.512$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Right Section

DASY Configuration:

- ε Probe: ES3DV3 - SN3168; ConvF(6.93, 6.93, 6.93); Calibrated: 2016-9-27;
- ε Sensor-Surface: 3mm (Mechanical Surface Detection), $z = 2.0, 32.0$
- ε Electronics: DAE4 Sn851; Calibrated: 2016-7-22
- ε Phantom: SAM1; Type: SAM; Serial: TP-1475
- ε DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)


Configuration/Head/Area Scan (10x17x1): Measurement grid: $dx=12\text{mm}$, $dy=12\text{mm}$
Maximum value of SAR (measured) = 0.232 W/kg

Configuration/Head/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$

Reference Value = 6.521 V/m ; Power Drift = -0.07 dB

Peak SAR (extrapolated) = 0.262 W/kg

SAR(1 g) = 0.213 W/kg ; SAR(10 g) = 0.165 W/kg

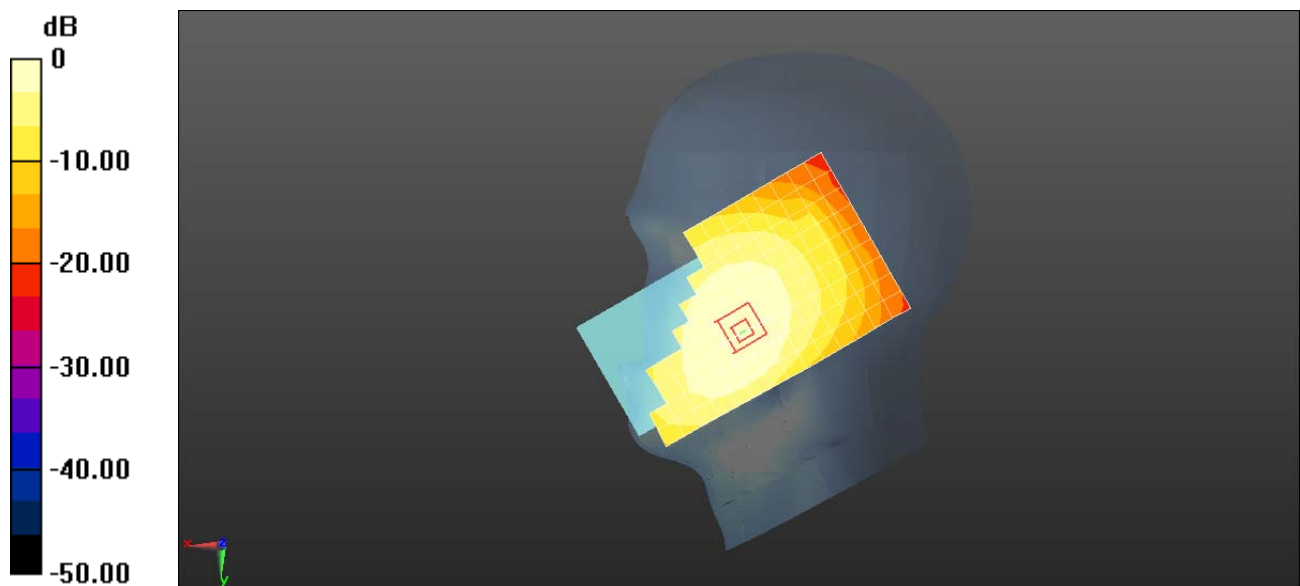

0 dB = 0.232 W/kg = -6.35 dBW/kg

Test Laboratory: HUAWEI SAR/HAC Lab

MHA-L29 LTE Band XVII 10M QPSK 1RB 25 offset 23800CH Back Side 15mm- Main Antenna

DUT: MHA-L29; Type: Smart Phone; Serial: SAR1

Communication System: UID 0, LTE-FDD (SC-FDMA, 10MHz, QPSK/16-QAM) (0); Frequency: 711 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 711 \text{ MHz}$; $\sigma = 0.956 \text{ S/m}$; $\epsilon_r = 56.154$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY Configuration:

- ⌵ Probe: ES3DV3 - SN3168; ConvF(6.45, 6.45, 6.45); Calibrated: 2016-9-27;
- ⌵ Sensor-Surface: 3mm (Mechanical Surface Detection), $z = 2.0, 32.0$
- ⌵ Electronics: DAE4 Sn851; Calibrated: 2016-7-22
- ⌵ Phantom: SAM2; Type: SAM; Serial: TP:1474
- ⌵ DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Body/Area Scan (9x14x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (measured) = 0.272 W/kg


Configuration/Body/Zoom Scan (6x6x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 15.95 V/m ; Power Drift = -0.04 dB

Peak SAR (extrapolated) = 0.330 W/kg

SAR(1 g) = 0.254 W/kg ; SAR(10 g) = 0.196 W/kg

Maximum value of SAR (measured) = 0.279 W/kg

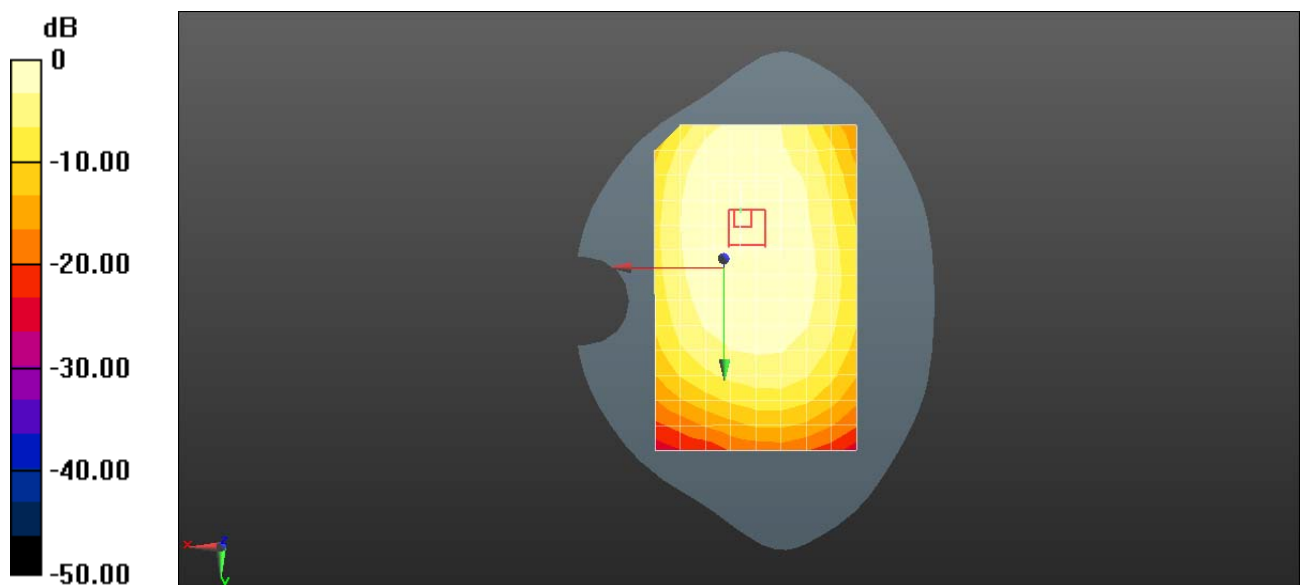

Test Laboratory: HUAWEI SAR/HAC Lab

MHA-L29 LTE Band XVII 10M QPSK 1RB 25 offset 23800CH Front Side 10mm-Main Antenna

DUT: MHA-L29; Type: Smart Phone; Serial: SAR1

Communication System: UID 0, LTE-FDD (SC-FDMA, 10MHz, QPSK/16-QAM) (0); Frequency: 711 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 711 \text{ MHz}$; $\sigma = 0.956 \text{ S/m}$; $\epsilon_r = 56.154$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY Configuration:

- ε Probe: ES3DV3 - SN3168; ConvF(6.45, 6.45, 6.45); Calibrated: 2016-9-27;
- ε Sensor-Surface: 3mm (Mechanical Surface Detection), $z = 2.0, 32.0$
- ε Electronics: DAE4 Sn851; Calibrated: 2016-7-22
- ε Phantom: SAM2; Type: SAM; Serial: TP:1474
- ε DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Body/Area Scan (9x14x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (measured) = 0.290 W/kg

Configuration/Body/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 15.09 V/m ; Power Drift = -0.13 dB

Peak SAR (extrapolated) = 0.406 W/kg

SAR(1 g) = 0.238 W/kg ; SAR(10 g) = 0.140 W/kg

Maximum value of SAR (measured) = 0.293 W/kg

Configuration/Body/Zoom Scan (5x5x7)/Cube 1: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 15.09 V/m ; Power Drift = -0.13 dB

Peak SAR (extrapolated) = 0.315 W/kg

SAR(1 g) = 0.225 W/kg ; SAR(10 g) = 0.164 W/kg

Maximum value of SAR (measured) = 0.250 W/kg

Test Laboratory: HUAWEI SAR/HAC Lab

MHA-L29 LTE Band XXVI 15M QPSK 1RB 38 offset 26865CH Right touch-Main Antenna

DUT: MHA-L29; Type: Smart Phone; Serial: SAR2

Communication System: UID 0, LTE-FDD (SC-FDMA, 15MHz, QPSK/16-QAM) (0); Frequency: 831.5 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 831.5$ MHz; $\sigma = 0.901$ S/m; $\epsilon_r = 41.897$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY Configuration:

- ε Probe: EX3DV4 - SN3736; ConvF(9.22, 9.22, 9.22); Calibrated: 2017-4-27;
- ε Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- ε Electronics: DAE4 Sn852; Calibrated: 2017-4-27
- ε Phantom: SAM3; Type: SAM; Serial: TP-1597
- ε DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Head/Area Scan (9x14x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.275 W/kg

Configuration/Head/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm


Reference Value = 6.943 V/m; Power Drift = 0.07 dB

Peak SAR (extrapolated) = 0.298 W/kg

SAR(1 g) = 0.235 W/kg; SAR(10 g) = 0.183 W/kg

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.276 W/kg

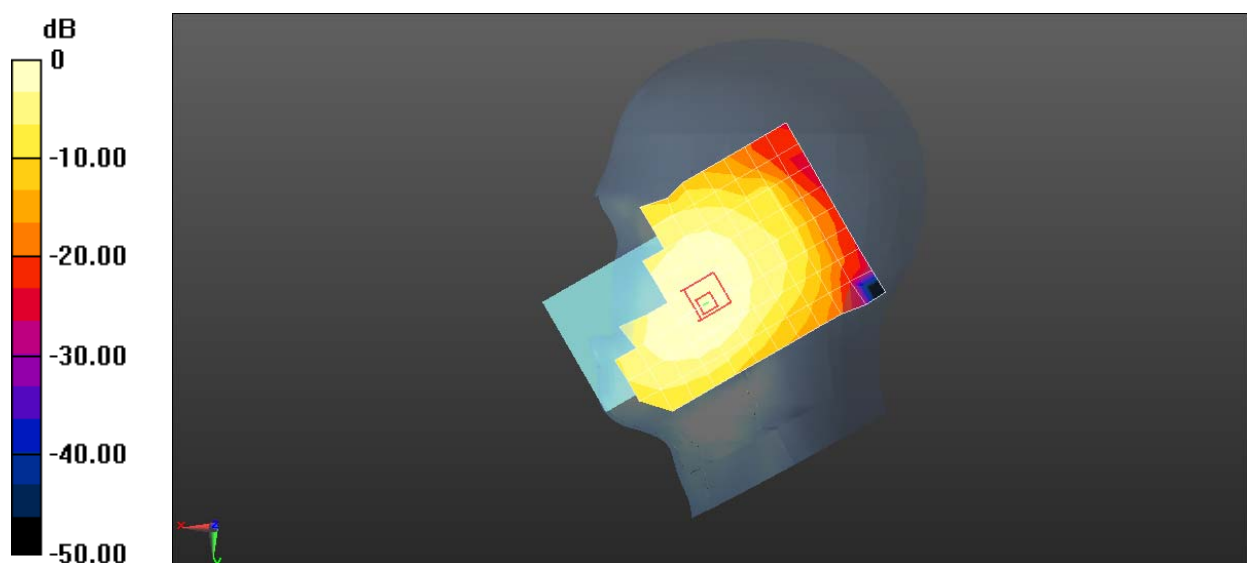

0 dB = 0.275 W/kg = -5.61 dBW/kg

Test Laboratory: HUAWEI SAR/HAC Lab

MHA-L29 LTE Band XXVI 15M QPSK 1RB 38 offset 26965CH Back Side 15mm-Main Antenna

DUT: MHA-L29; Type: Smart Phone; Serial: SAR1

Communication System: UID 0, LTE-FDD (SC-FDMA, 15MHz, QPSK/16-QAM) (0); Frequency: 841.5 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 841.5$ MHz; $\sigma = 0.988$ S/m; $\epsilon_r = 53.027$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- ε Probe: EX3DV4 - SN3578; ConvF(9.53, 9.53, 9.53); Calibrated: 2017-5-5;
- ε Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- ε Electronics: DAE4 Sn1236; Calibrated: 2017-7-21
- ε Phantom: SAM2; Type: SAM; Serial: TP:1474
- ε DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Body/Area Scan (9x14x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.264 W/kg

Configuration/Body/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm


Reference Value = 12.56 V/m; Power Drift = 0.02 dB

Peak SAR (extrapolated) = 0.298 W/kg

SAR(1 g) = 0.215 W/kg; SAR(10 g) = 0.163 W/kg

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.268 W/kg

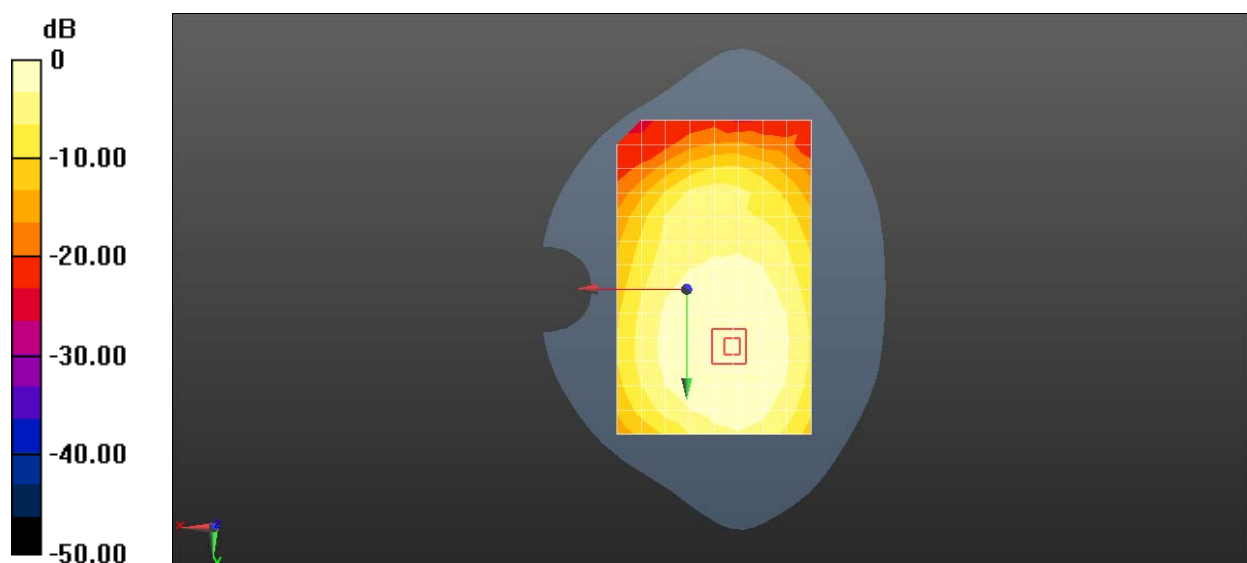

Test Laboratory: HUAWEI SAR/HAC Lab

MHA-L29 LTE Band XXVI 15M QPSK 1RB 38 offset 26965CH Back Side 10mm- Main Antenna

DUT: MHA-L29; Type: Smart Phone; Serial: SAR1

Communication System: UID 0, LTE-FDD (SC-FDMA, 15MHz, QPSK/16-QAM) (0); Frequency: 841.5 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 841.5$ MHz; $\sigma = 0.988$ S/m; $\epsilon_r = 53.027$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- ε Probe: EX3DV4 - SN3578; ConvF(9.53, 9.53, 9.53); Calibrated: 2017-5-5;
- ε Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- ε Electronics: DAE4 Sn1236; Calibrated: 2017-7-21
- ε Phantom: SAM2; Type: SAM; Serial: TP:1474
- ε DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Body/Area Scan (9x14x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.300 W/kg

Configuration/Body/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm


Reference Value = 14.15 V/m; Power Drift = 0.02 dB

Peak SAR (extrapolated) = 0.337 W/kg

SAR(1 g) = 0.245 W/kg; SAR(10 g) = 0.186 W/kg

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.303 W/kg

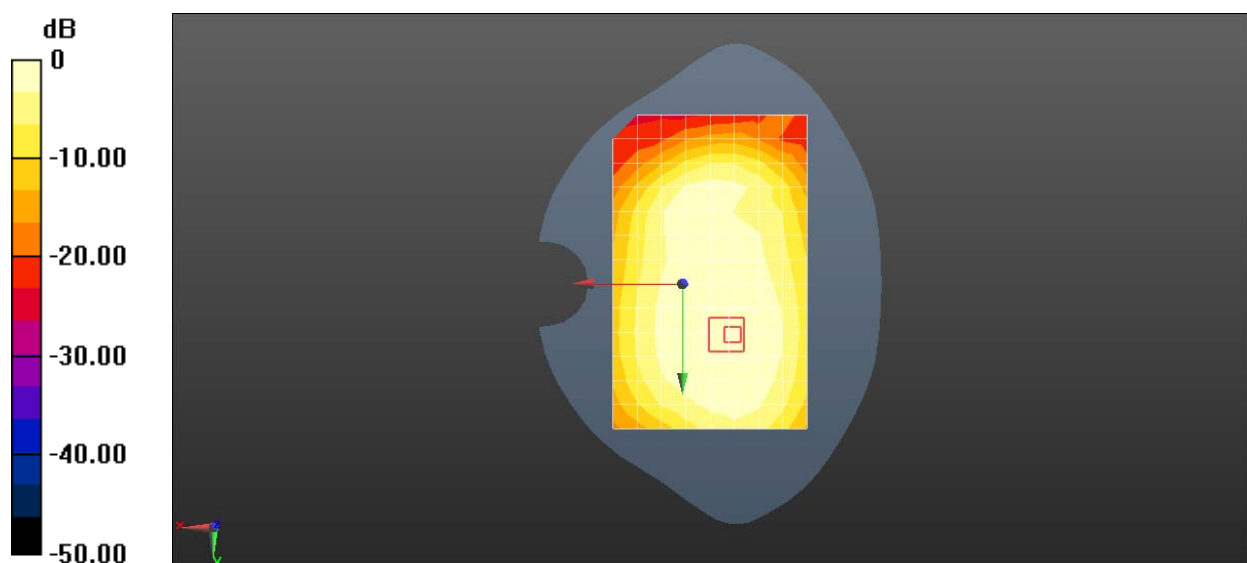

0 dB = 0.300 W/kg = -5.23 dBW/kg

Test Laboratory: HUAWEI SAR/HAC Lab

MHA-L29 LTE Band XXXVIII 20M QPSK 1RB 99 offset 38150CH Left touch with Battery2-Main Antenna

DUT: MHA-L29; Type: Smart Phone; Serial: SAR1

Communication System: UID 0, LTE-TDD (SC-FDMA, 20MHz, QPSK/16-QAM) (0); Frequency: 2610 MHz; Duty Cycle: 1:1.57906

Medium parameters used: $f = 2610$ MHz; $\sigma = 1.979$ S/m; $\epsilon_r = 38.198$; $\rho = 1000$ kg/m³

Phantom section: Left Section

DASY Configuration:

- ε Probe: EX3DV4 - SN3578; ConvF(7.31, 7.31, 7.31); Calibrated: 2017-5-5;
- ε Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- ε Electronics: DAE4 Sn918; Calibrated: 2017-6-26
- ε Phantom: SAM1; Type: SAM; Serial: TP-1475
- ε DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Head/Area Scan (11x16x1): Measurement grid: $dx=12$ mm, $dy=12$ mm

Maximum value of SAR (measured) = 0.505 W/kg


Configuration/Head/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 4.068 V/m; Power Drift = 0.03 dB

Peak SAR (extrapolated) = 0.667 W/kg

SAR(1 g) = 0.386 W/kg; SAR(10 g) = 0.212 W/kg

Maximum value of SAR (measured) = 0.566 W/kg

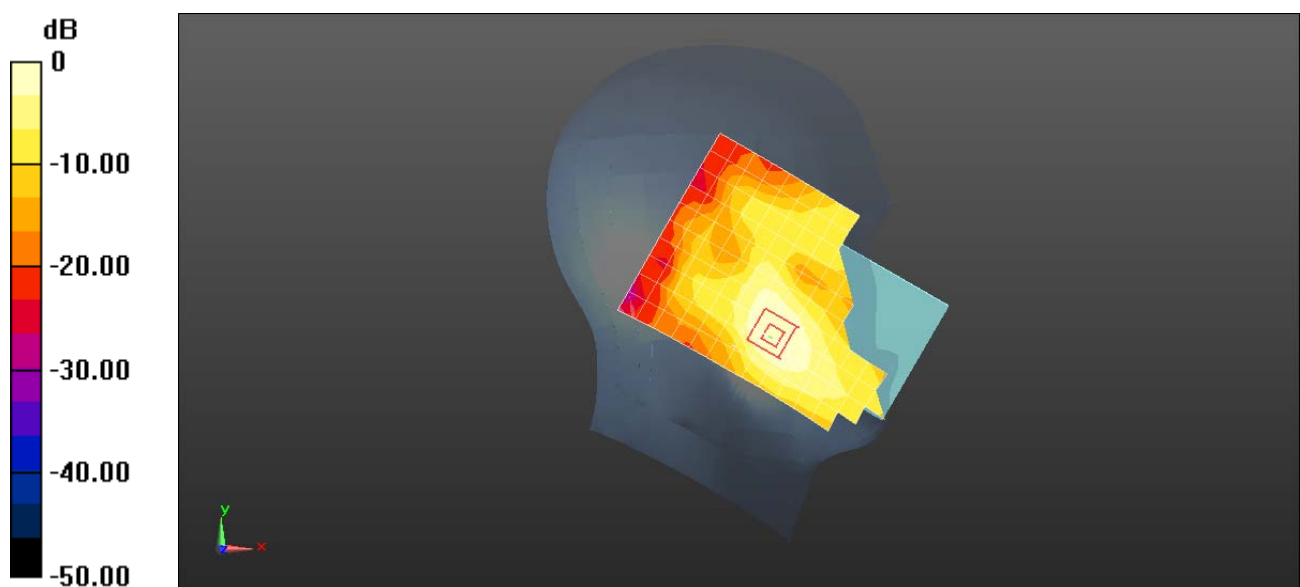

0 dB = 0.505 W/kg = -2.97 dBW/kg

Test Laboratory: HUAWEI SAR/HAC Lab

MHA-L29 LTE Band XXXVIII 20M QPSK 1RB 99 offset 38150CH Back side 15mm with Battery2-Main Antenna

DUT: MHA-L29; Type: Smart Phone; Serial: SAR1

Communication System: UID 0, LTE-TDD (SC-FDMA, 20MHz, QPSK/16-QAM) (0); Frequency: 2610 MHz; Duty Cycle: 1:1.57906

Medium parameters used: $f = 2610$ MHz; $\sigma = 2.225$ S/m; $\epsilon_r = 50.251$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- ε Probe: EX3DV4 - SN3578; ConvF(7.27, 7.27, 7.27); Calibrated: 2017-5-5;
- ε Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- ε Electronics: DAE4 Sn1236; Calibrated: 2017-7-21
- ε Phantom: SAM2; Type: SAM; Serial: TP:1474
- ε DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Body/Area Scan (11x16x1): Measurement grid: $dx=12$ mm, $dy=12$ mm

Maximum value of SAR (measured) = 0.494 W/kg


Configuration/Body/Zoom Scan (8x8x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 5.227 V/m; Power Drift = -0.07 dB

Peak SAR (extrapolated) = 0.660 W/kg

SAR(1 g) = 0.336 W/kg; SAR(10 g) = 0.165 W/kg

Maximum value of SAR (measured) = 0.538 W/kg

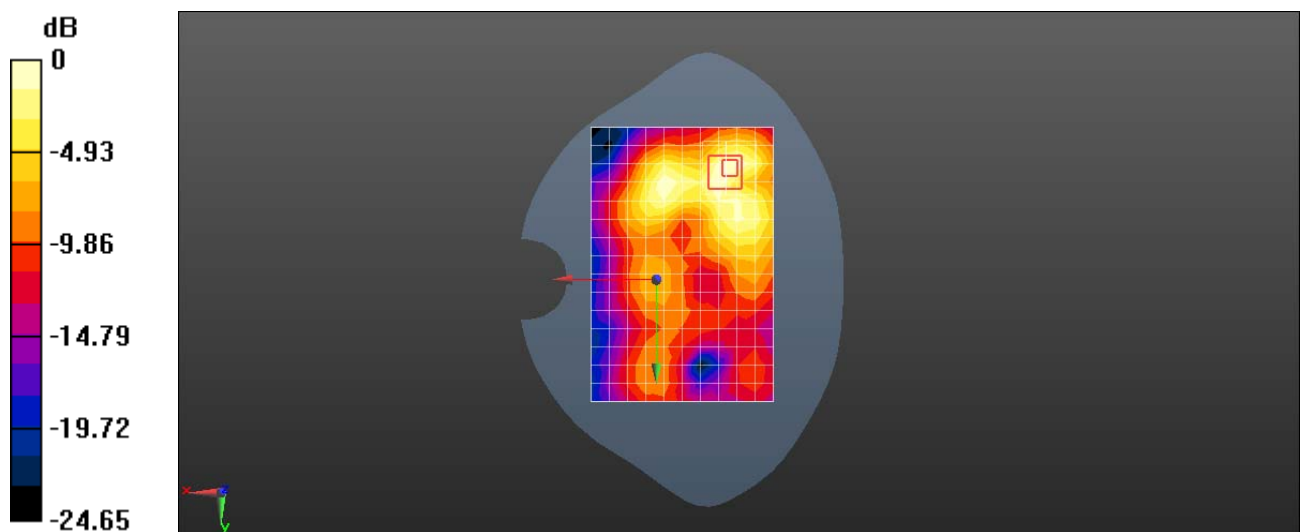

0 dB = 0.494 W/kg = -3.06 dBW/kg

Test Laboratory: HUAWEI SAR/HAC Lab

MHA-L29 LTE Band XXXVIII 20M QPSK 1RB 99 offset 38150CH Back side 10mm -Main Antenna

DUT: MHA-L29; Type: Smart Phone; Serial: SAR1

Communication System: UID 0, LTE-TDD (SC-FDMA, 20MHz, QPSK/16-QAM) (0); Frequency: 2610 MHz; Duty Cycle: 1:1.57906

Medium parameters used: $f = 2610$ MHz; $\sigma = 2.225$ S/m; $\epsilon_r = 50.251$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- ε Probe: EX3DV4 - SN3578; ConvF(7.27, 7.27, 7.27); Calibrated: 2017-5-5;
- ε Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- ε Electronics: DAE4 Sn1236; Calibrated: 2017-7-21
- ε Phantom: SAM2; Type: SAM; Serial: TP:1474
- ε DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Body/Area Scan (11x16x1): Measurement grid: $dx=12$ mm, $dy=12$ mm

Maximum value of SAR (measured) = 1.35 W/kg


Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 6.408 V/m; Power Drift = -0.03 dB

Peak SAR (extrapolated) = 2.08 W/kg

SAR(1 g) = 0.956 W/kg; SAR(10 g) = 0.419 W/kg

Maximum value of SAR (measured) = 1.54 W/kg

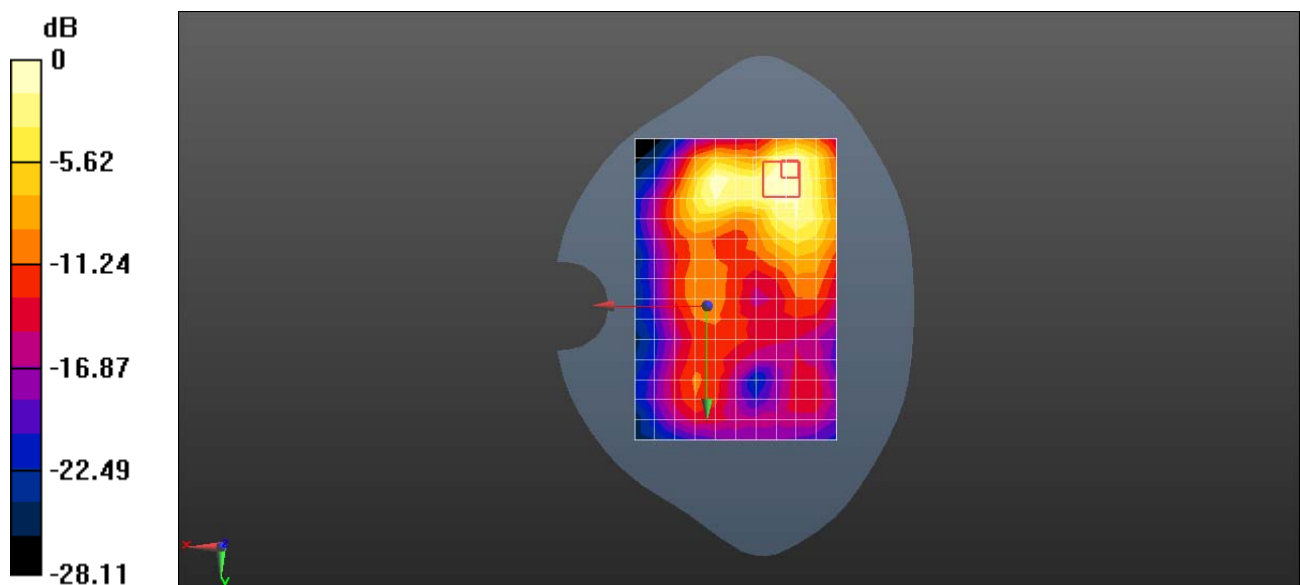

0 dB = 1.35 W/kg = 1.30 dBW/kg

Test Laboratory: HUAWEI SAR/HAC Lab

MHA-L29 LTE Band XLI 20M QPSK 1RB 99 offset 40740CH Left touch-Main Antenna

DUT: MHA-L29; Type: Smart Phone; Serial: SAR1

Communication System: UID 0, LTE-TDD (SC-FDMA, 20MHz, QPSK/16-QAM) (0); Frequency: 2605 MHz; Duty Cycle: 1:1.57906

Medium parameters used: $f = 2605$ MHz; $\sigma = 1.981$ S/m; $\epsilon_r = 38.241$; $\rho = 1000$ kg/m³

Phantom section: Left Section

DASY Configuration:

- ε Probe: EX3DV4 - SN3578; ConvF(7.31, 7.31, 7.31); Calibrated: 2017-5-5;
- ε Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- ε Electronics: DAE4 Sn918; Calibrated: 2017-6-26
- ε Phantom: SAM1; Type: SAM; Serial: TP-1475
- ε DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Head/Area Scan (10x16x1): Measurement grid: $dx=12$ mm, $dy=12$ mm

Maximum value of SAR (measured) = 0.363 W/kg


Configuration/Head/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 3.803 V/m; Power Drift = 0.11 dB

Peak SAR (extrapolated) = 0.446 W/kg

SAR(1 g) = 0.260 W/kg; SAR(10 g) = 0.140 W/kg

Maximum value of SAR (measured) = 0.382 W/kg

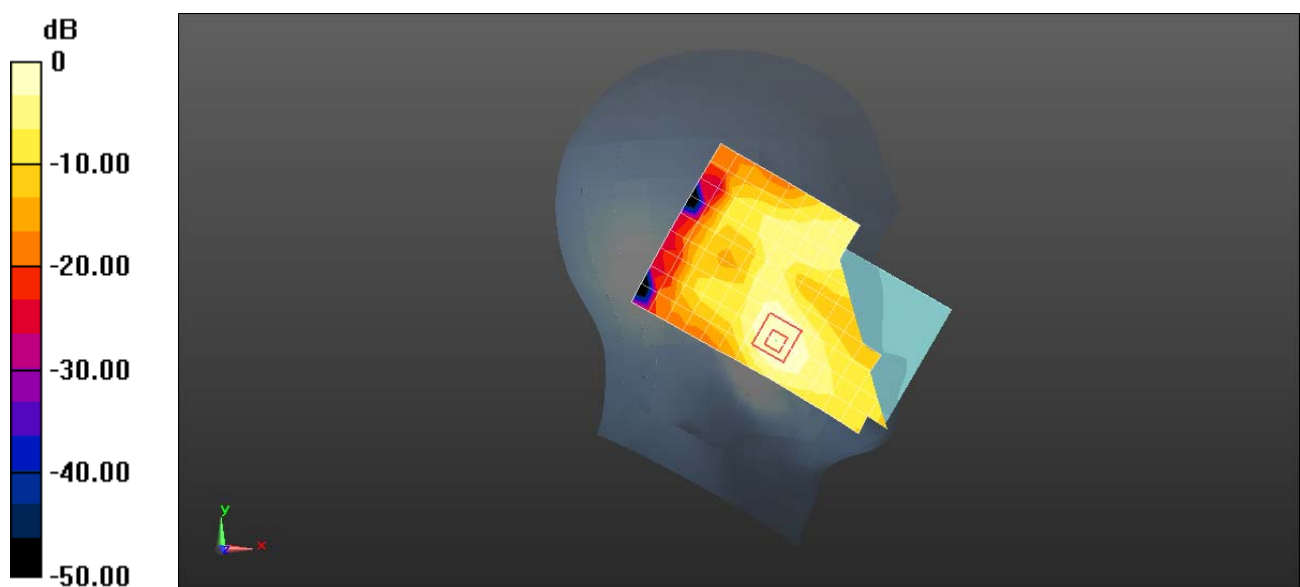

0 dB = 0.363 W/kg = -4.40 dBW/kg

Test Laboratory: HUAWEI SAR/HAC Lab

MHA-L29 LTE Band XLI 20M QPSK 50RB 50 offset 40340CH Back side 15mm- Main Antenna

DUT: MHA-L29; Type: Smart Phone; Serial: SAR1

Communication System: UID 0, LTE-TDD (SC-FDMA, 20MHz, QPSK/16-QAM) (0); Frequency: 2565 MHz; Duty Cycle: 1:1.57906

Medium parameters used: $f = 2565$ MHz; $\sigma = 2.181$ S/m; $\epsilon_r = 50.332$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- ε Probe: EX3DV4 - SN3578; ConvF(7.27, 7.27, 7.27); Calibrated: 2017-5-5;
- ε Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- ε Electronics: DAE4 Sn1236; Calibrated: 2017-7-21
- ε Phantom: SAM2; Type: SAM; Serial: TP:1474
- ε DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Body/Area Scan (11x17x1): Measurement grid: $dx=12$ mm, $dy=12$ mm


Maximum value of SAR (measured) = 0.237 W/kg

Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 2.491 V/m; Power Drift = 0.07 dB

Peak SAR (extrapolated) = 0.296 W/kg

SAR(1 g) = 0.158 W/kg; SAR(10 g) = 0.081 W/kg

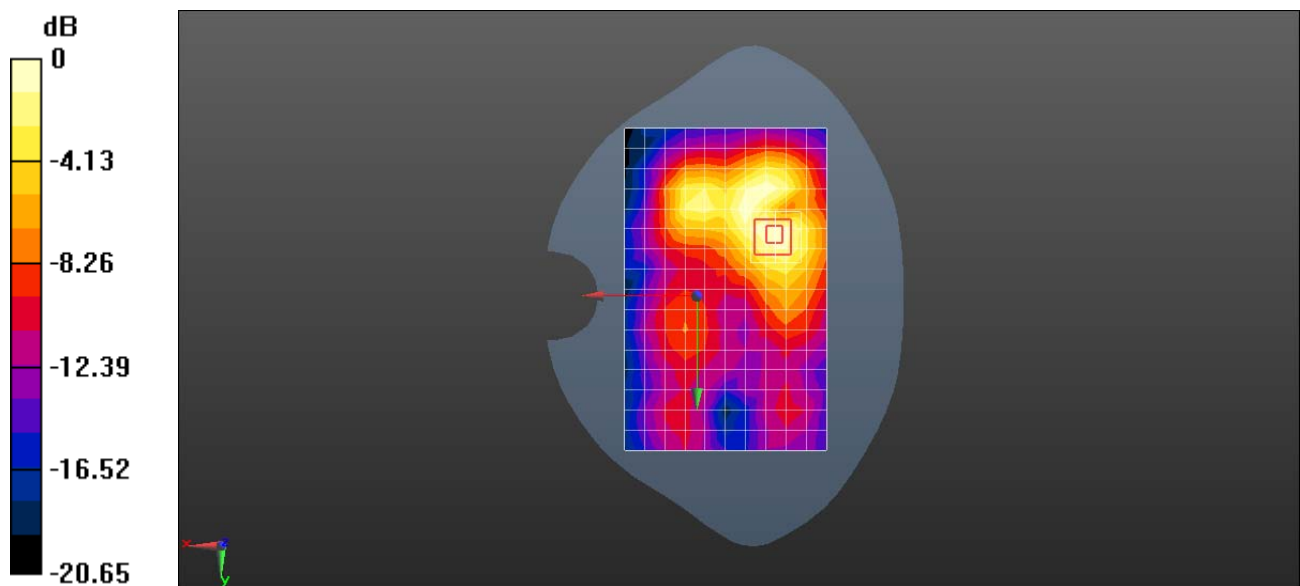

0 dB = 0.237 W/kg = -6.25 dBW/kg

Test Laboratory: HUAWEI SAR/HAC Lab

MHA-L29 LTE Band XLI 20M QPSK 1RB 50 offset 40340CH Back side 10mm-Main Antenna

DUT: MHA-L29; Type: Smart Phone; Serial: SAR1

Communication System: UID 0, LTE-TDD (SC-FDMA, 20MHz, QPSK/16-QAM) (0); Frequency: 2565 MHz; Duty Cycle: 1:1.57906

Medium parameters used: $f = 2565$ MHz; $\sigma = 2.181$ S/m; $\epsilon_r = 50.332$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- ε Probe: EX3DV4 - SN3578; ConvF(7.27, 7.27, 7.27); Calibrated: 2017-5-5;
- ε Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- ε Electronics: DAE4 Sn1236; Calibrated: 2017-7-21
- ε Phantom: SAM2; Type: SAM; Serial: TP:1474
- ε DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Body/Area Scan (11x17x1): Measurement grid: $dx=12$ mm, $dy=12$ mm


Maximum value of SAR (measured) = 0.937 W/kg

Configuration/Body/Zoom Scan (9x10x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 4.026 V/m; Power Drift = 0.09 dB

Peak SAR (extrapolated) = 1.17 W/kg

SAR(1 g) = 0.592 W/kg; SAR(10 g) = 0.294 W/kg

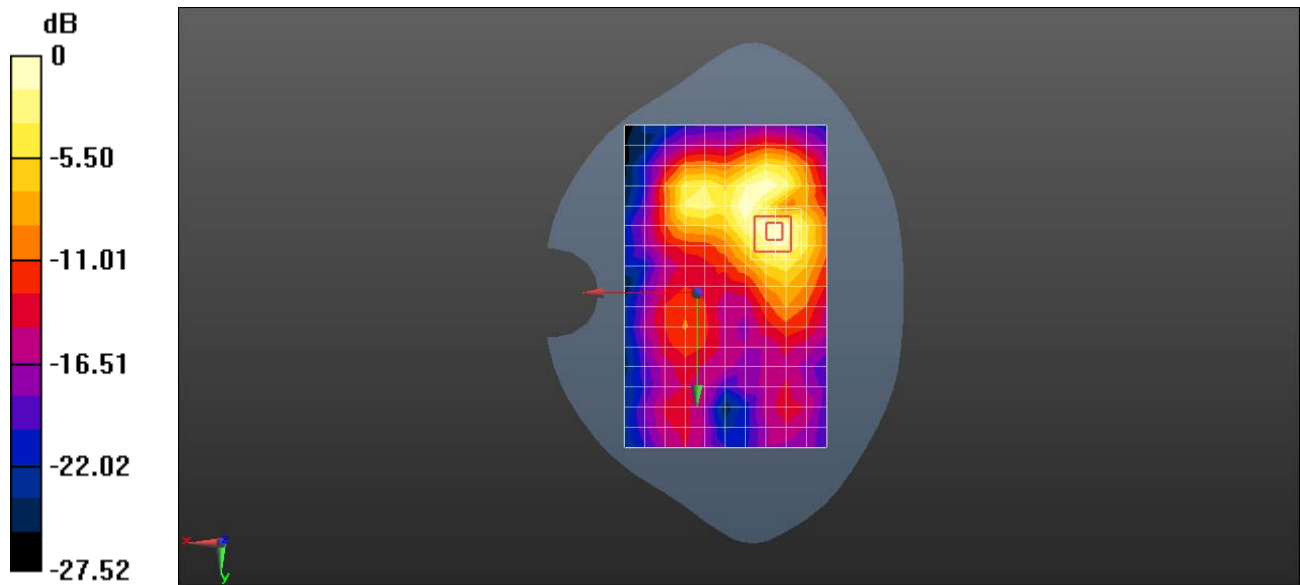

0 dB = 0.937 W/kg = -0.28 dBW/kg

Test Laboratory: HUAWEI SAR/HAC Lab

MHA-L29 WiFi 2.4G 802.11b 1M 6CH Left touch

DUT: MHA-L29; Type: Smart Phone; Serial: SAR1

Communication System: UID 0, WiFi(802.11a/b/g/n/ac) (0); Frequency: 2437 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 2437$ MHz; $\sigma = 1.802$ S/m; $\epsilon_r = 38.255$; $\rho = 1000$ kg/m³

Phantom section: Left Section

DASY Configuration:

- ε Probe: EX3DV4 - SN3578; ConvF(7.44, 7.44, 7.44); Calibrated: 2017-5-5;
- ε Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- ε Electronics: DAE4 Sn1236; Calibrated: 2017-7-21
- ε Phantom: SAM1; Type: SAM; Serial: TP-1475
- ε DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Head/Area Scan (10x17x1): Measurement grid: $dx=12$ mm, $dy=12$ mm
Maximum value of SAR (measured) = 1.25 W/kg


Configuration/Head/Zoom Scan (7x8x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 8.226 V/m; Power Drift = -0.14 dB

Peak SAR (extrapolated) = 1.86 W/kg

SAR(1 g) = 0.745 W/kg; SAR(10 g) = 0.355 W/kg

Maximum value of SAR (measured) = 1.37 W/kg

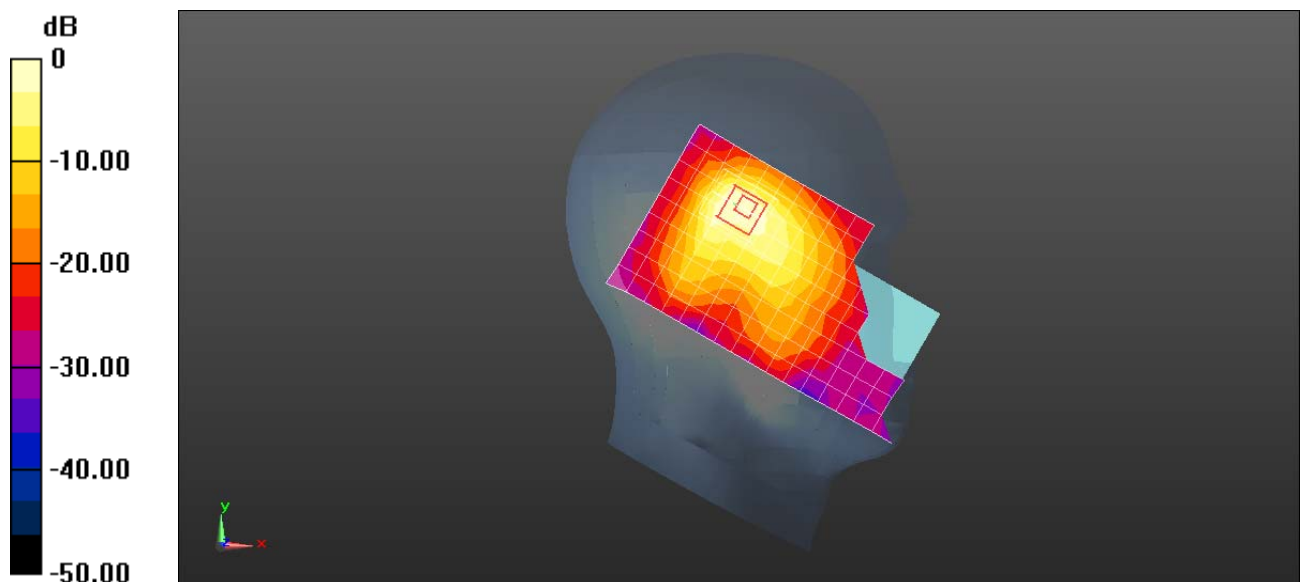

0 dB = 1.25 W/kg = 0.97 dBW/kg

Test Laboratory: HUAWEI SAR/HAC Lab

MHA-L29 WiFi2.4G 802.11b 1M 6CH Front Side 15mm

DUT: MHA-L29; Type: Smart Phone; Serial: SAR1

Communication System: UID 0, WiFi(802.11a/b/g/n/ac) (0); Frequency: 2437 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 2437 \text{ MHz}$; $\sigma = 1.994 \text{ S/m}$; $\epsilon_r = 50.66$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY Configuration:

- ε Probe: EX3DV4 - SN3578; ConvF(7.43, 7.43, 7.43); Calibrated: 2017-5-5;
- ε Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- ε Electronics: DAE4 Sn1236; Calibrated: 2017-7-21
- ε Phantom: SAM2; Type: SAM; Serial: TP:1474
- ε DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Body/Area Scan (11x16x1): Measurement grid: $dx=12\text{mm}$, $dy=12\text{mm}$
Maximum value of SAR (measured) = 0.0989 W/kg


Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$

Reference Value = 4.254 V/m ; Power Drift = -0.19 dB

Peak SAR (extrapolated) = 0.121 W/kg

SAR(1 g) = 0.067 W/kg ; SAR(10 g) = 0.037 W/kg

Maximum value of SAR (measured) = 0.100 W/kg

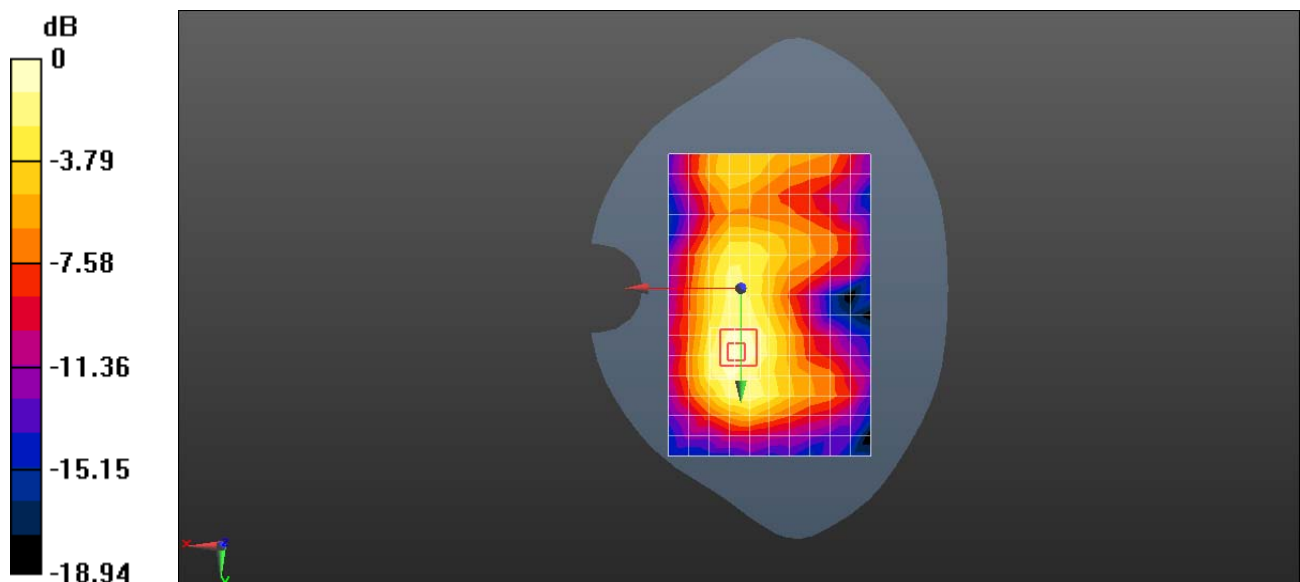

$0 \text{ dB} = 0.0989 \text{ W/kg} = -10.05 \text{ dBW/kg}$

Test Laboratory: HUAWEI SAR/HAC Lab

MHA-L29 WiFi2.4G 802.11b 1M 6CH Front Side 10mm

DUT: MHA-L29; Type: Smart Phone; Serial: SAR1

Communication System: UID 0, WiFi(802.11a/b/g/n/ac) (0); Frequency: 2437 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 2437 \text{ MHz}$; $\sigma = 1.994 \text{ S/m}$; $\epsilon_r = 50.66$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY Configuration:

- ε Probe: EX3DV4 - SN3578; ConvF(7.43, 7.43, 7.43); Calibrated: 2017-5-5;
- ε Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- ε Electronics: DAE4 Sn1236; Calibrated: 2017-7-21
- ε Phantom: SAM2; Type: SAM; Serial: TP:1474
- ε DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Body/Area Scan (11x16x1): Measurement grid: $dx=12\text{mm}$, $dy=12\text{mm}$
Maximum value of SAR (measured) = 0.198 W/kg


Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$

Reference Value = 5.476 V/m ; Power Drift = -0.11 dB

Peak SAR (extrapolated) = 0.255 W/kg

SAR(1 g) = 0.136 W/kg ; SAR(10 g) = 0.072 W/kg

Maximum value of SAR (measured) = 0.210 W/kg

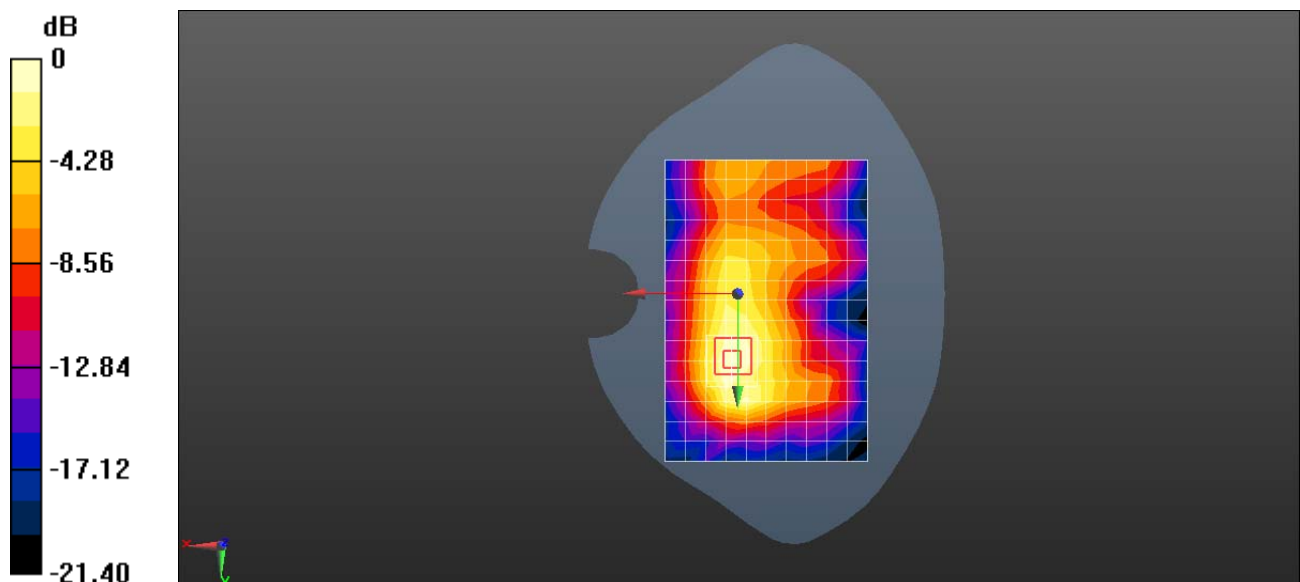

$0 \text{ dB} = 0.198 \text{ W/kg} = -7.03 \text{ dBW/kg}$

Test Laboratory: HUAWEI SAR/HAC Lab

MHA-L29 WiFi 5G 802.11ac 20M 120CH Left Touch

DUT: MHA-L29; Type: Smart Phone; Serial: SAR1

Communication System: UID 0, WiFi(802.11a/b/g/n/ac) (0); Frequency: 5600 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 5600$ MHz; $\sigma = 4.949$ S/m; $\epsilon_r = 34.609$; $\rho = 1000$ kg/m³

Phantom section: Left Section

DASY Configuration:

- ε Probe: EX3DV4 - SN3578; ConvF(4.76, 4.76, 4.76); Calibrated: 2017-5-5;
- ε Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = 1.0, 25.0$
- ε Electronics: DAE4 Sn1236; Calibrated: 2017-7-21
- ε Phantom: SAM1; Type: SAM; Serial: TP-1475
- ε DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Head/Area Scan (12x20x1): Measurement grid: $dx=10$ mm, $dy=10$ mm
Maximum value of SAR (measured) = 1.47 W/kg


Configuration/Head/Zoom Scan (9x9x7)/Cube 0: Measurement grid: $dx=4$ mm, $dy=4$ mm, $dz=1.4$ mm

Reference Value = 3.967 V/m; Power Drift = 0.19 dB

Peak SAR (extrapolated) = 3.65 W/kg

SAR(1 g) = 0.841 W/kg; SAR(10 g) = 0.277 W/kg

Maximum value of SAR (measured) = 2.07 W/kg

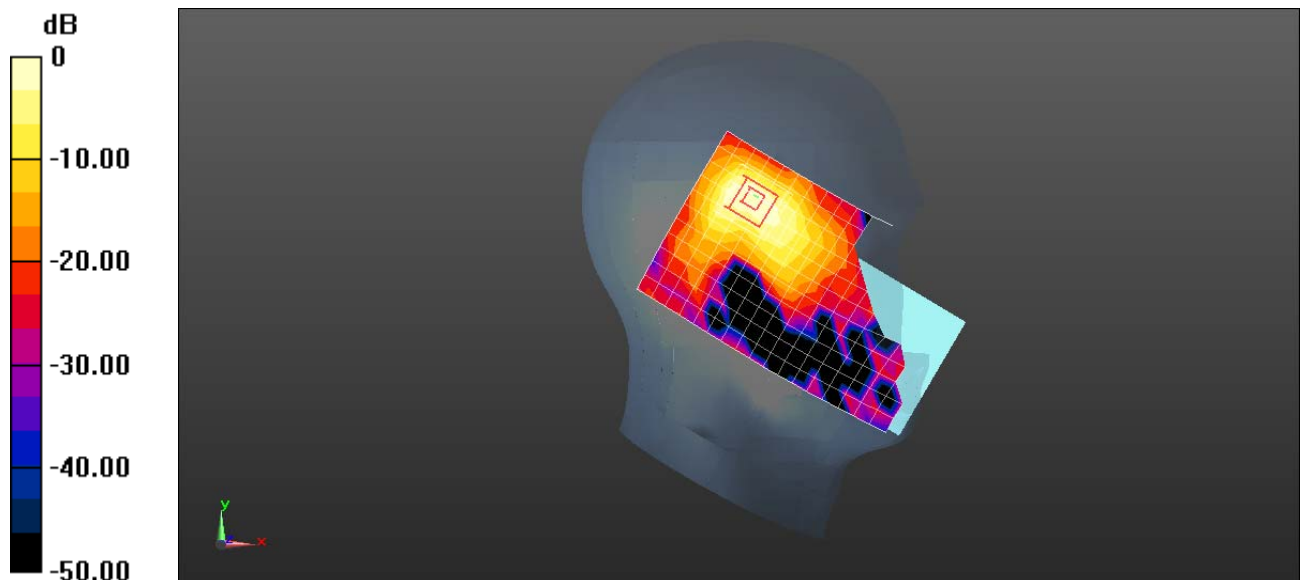

0 dB = 1.47 W/kg = 1.67 dBW/kg

Test Laboratory: HUAWEI SAR/HAC Lab

MHA-L29 WIFI 5G 802.11n 40M 118CH Front Side 15mm with Battery 2

DUT: MHA-L29; Type: Smart Phone; Serial: SAR1

Communication System: UID 0, WiFi(802.11a/b/g/n/ac) (0); Frequency: 5590 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 5590$ MHz; $\sigma = 5.727$ S/m; $\epsilon_r = 48.088$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- ε Probe: EX3DV4 - SN3578; ConvF(4.3, 4.3, 4.3); Calibrated: 2017-5-5;
- ε Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = 1.0, 25.0$
- ε Electronics: DAE4 Sn1236; Calibrated: 2017-7-21
- ε Phantom: SAM2; Type: SAM; Serial: TP:1474
- ε DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Body/Area Scan (12x19x1): Measurement grid: $dx=10$ mm, $dy=10$ mm
Maximum value of SAR (measured) = 0.166 W/kg


Configuration/Body/Zoom Scan (8x8x7)/Cube 0: Measurement grid: $dx=4$ mm, $dy=4$ mm, $dz=1.4$ mm

Reference Value = 1.937 V/m; Power Drift = -0.11 dB

Peak SAR (extrapolated) = 0.331 W/kg

SAR(1 g) = 0.076 W/kg; SAR(10 g) = 0.030 W/kg

Maximum value of SAR (measured) = 0.176 W/kg

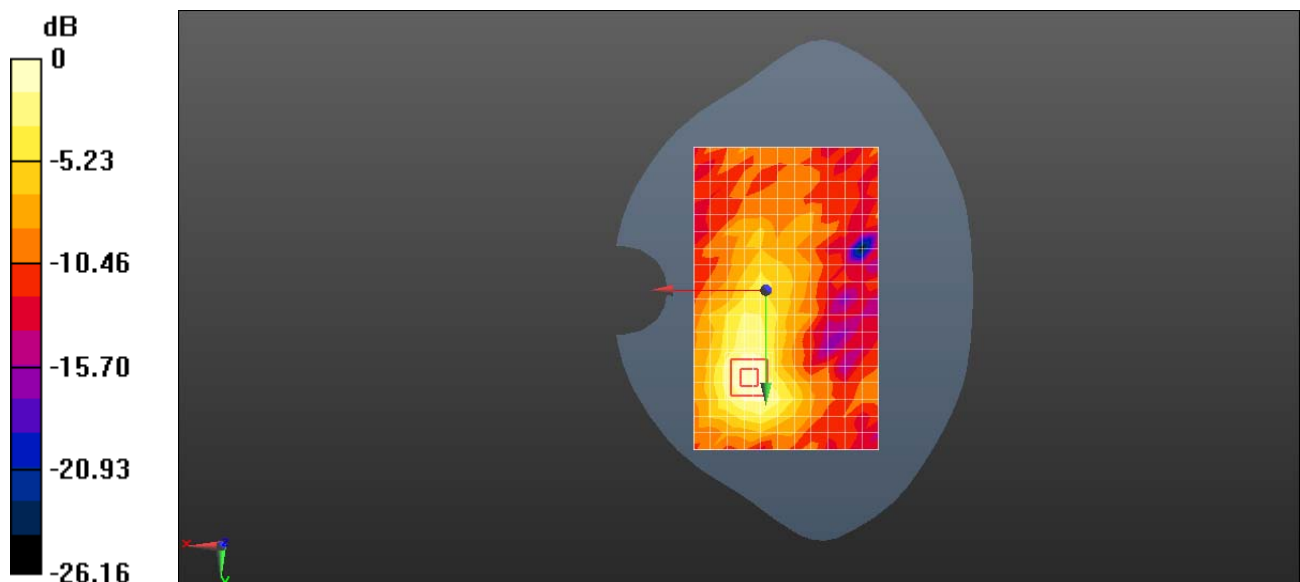

0 dB = 0.166 W/kg = -7.80 dBW/kg

Test Laboratory: HUAWEI SAR/HAC Lab

MHA-L29 WiFi 5G 802.11n 40M 151CH Right Side 10mm

DUT: MHA-L29; Type: Smart Phone; Serial: SAR1

Communication System: UID 0, WiFi(802.11a/b/g/n/ac) (0); Frequency: 5755 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 5755$ MHz; $\sigma = 6.049$ S/m; $\epsilon_r = 47.409$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- ε Probe: EX3DV4 - SN3578; ConvF(4.48, 4.48, 4.48); Calibrated: 2017-5-5;
- ε Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = 1.0, 25.0$
- ε Electronics: DAE4 Sn1236; Calibrated: 2017-7-21
- ε Phantom: SAM2; Type: SAM; Serial: TP:1474
- ε DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Body/Area Scan (7x19x1): Measurement grid: $dx=10$ mm, $dy=10$ mm
Maximum value of SAR (measured) = 0.388 W/kg


Configuration/Body/Zoom Scan (8x8x7)/Cube 0: Measurement grid: $dx=4$ mm, $dy=4$ mm, $dz=1.4$ mm

Reference Value = 2.692 V/m; Power Drift = 0.10 dB

Peak SAR (extrapolated) = 0.793 W/kg

SAR(1 g) = 0.177 W/kg; SAR(10 g) = 0.066 W/kg

Maximum value of SAR (measured) = 0.418 W/kg

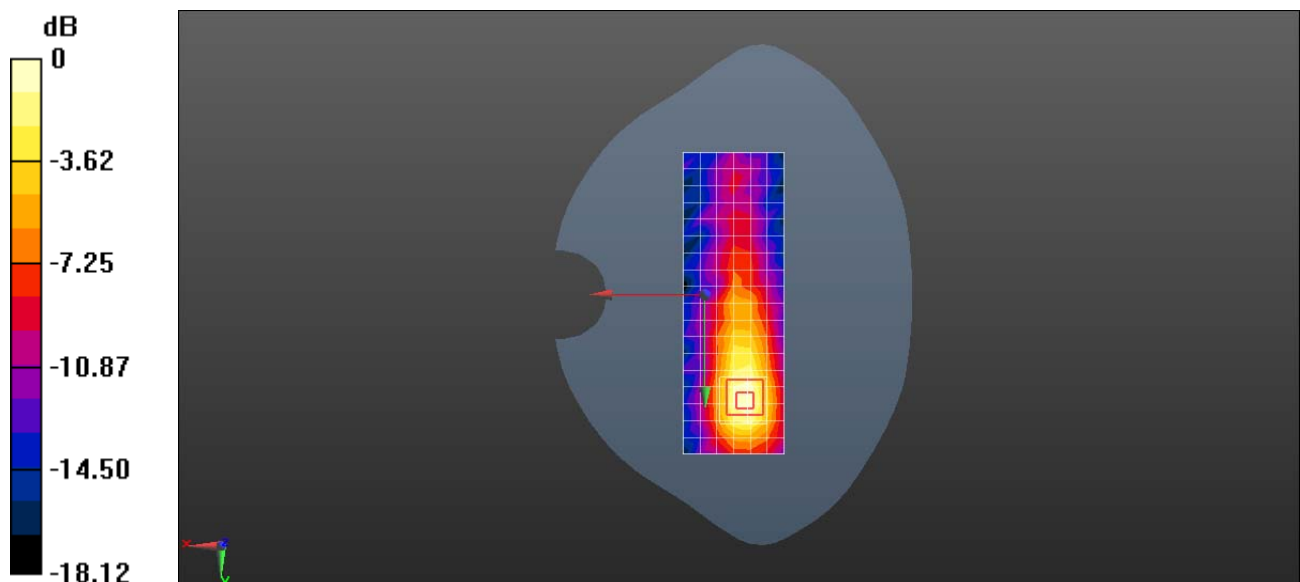

Test Laboratory: HUAWEI SAR/HAC Lab

MHA-L29 WiFi 5G 802.11n 40M 118CH Right Side 0mm

DUT: MHA-L29; Type: Smart Phone; Serial: SAR1

Communication System: UID 0, WiFi(802.11a/b/g/n/ac) (0); Frequency: 5590 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 5590$ MHz; $\sigma = 5.727$ S/m; $\epsilon_r = 48.088$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- ε Probe: EX3DV4 - SN3578; ConvF(4.3, 4.3, 4.3); Calibrated: 2017-5-5;
- ε Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = 1.0, 25.0$
- ε Electronics: DAE4 Sn1236; Calibrated: 2017-7-21
- ε Phantom: SAM2; Type: SAM; Serial: TP:1474
- ε DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Body/Area Scan (7x19x1): Measurement grid: $dx=10$ mm, $dy=10$ mm
Maximum value of SAR (measured) = 3.27 W/kg


Configuration/Body/Zoom Scan (8x8x7)/Cube 0: Measurement grid: $dx=4$ mm, $dy=4$ mm, $dz=1.4$ mm

Reference Value = 4.724 V/m; Power Drift = 0.10 dB

Peak SAR (extrapolated) = 16.8 W/kg

SAR(1 g) = 2.65 W/kg; SAR(10 g) = 0.652 W/kg

Maximum value of SAR (measured) = 7.41 W/kg

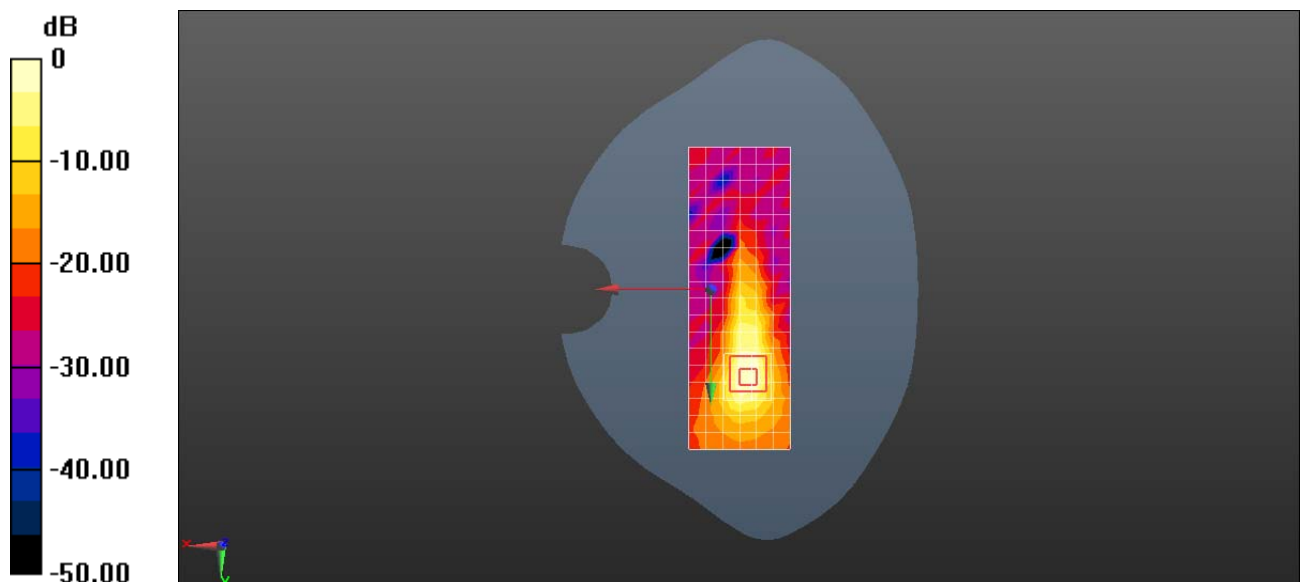

0 dB = 3.27 W/kg = 5.15 dBW/kg