



### **Declaration**

**BTL** represents to the client that testing is done in accordance with standard procedures as applicable and that test instruments used has been calibrated with standards traceable to international standard(s) and/or national standard(s).

**BTL's** reports apply only to the specific samples tested under conditions. It is manufacture's responsibility to ensure that additional production units of this model are manufactured with the identical electrical and mechanical components. **BTL** shall have no liability for any declarations, inferences or generalizations drawn by the client or others from **BTL** issued reports.

**BTL's** report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the Federal Government.

This report is the confidential property of the client. As a mutual protection to the clients, the public and **BTL-self**, extracts from the test report shall not be reproduced except in full with **BTL's** authorized written approval.

**BTL's** laboratory quality assurance procedures are in compliance with the **ISO Guide 17025** requirements, and accredited by the conformity assessment authorities listed in this test report.

### **Limitation**

For the use of the authority's logo is limited unless the Test Standard(s)/Scope(s)/Item(s) mentioned in this test report is (are) included in the conformity assessment authorities acceptance respective.

| <b>Table of Contents</b>                                     | <b>Page</b> |
|--------------------------------------------------------------|-------------|
| <b>REPORT ISSUED HISTORY</b>                                 | <b>4</b>    |
| <b>1 . CERIFICATION</b>                                      | <b>5</b>    |
| <b>2 . SUMMARY OF TEST RESULTS</b>                           | <b>6</b>    |
| 2.1 TEST FACILITY                                            | 7           |
| 2.2 MEASUREMENT UNCERTAINTY                                  | 7           |
| <b>3 . GENERAL INFORMATION</b>                               | <b>8</b>    |
| 3.1 GENERAL DESCRIPTION OF EUT                               | 8           |
| 3.2 DESCRIPTION OF TEST MODES                                | 9           |
| 3.3 EUT OPERATING CONDITIONS                                 | 10          |
| 3.4 BLOCK DIAGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED | 10          |
| 3.5 DESCRIPTION OF SUPPORT UNITS                             | 12          |
| <b>4 . EMC EMISSION TEST</b>                                 | <b>13</b>   |
| 4.1 CONDUCTED EMISSION MEASUREMENT                           | 13          |
| 4.1.1 POWER LINE CONDUCTED EMISSION                          | 13          |
| 4.1.2 MEASUREMENT INSTRUMENTS LIST                           | 13          |
| 4.1.3 TEST PROCEDURE                                         | 14          |
| 4.1.4 DEVIATION FROM TEST STANDARD                           | 14          |
| 4.1.5 TEST SETUP                                             | 14          |
| 4.1.6 EUT OPERATING CONDITIONS                               | 14          |
| 4.1.7 TEST RESULTS                                           | 15          |
| 4.2 RADIATED EMISSION MEASUREMENT                            | 44          |
| 4.2.1 LIMITS OF RADIATED EMISSION MEASUREMENT                | 44          |
| 4.2.2 MEASUREMENT INSTRUMENTS LIST                           | 45          |
| 4.2.3 TEST PROCEDURE                                         | 46          |
| 4.2.4 DEVIATION FROM TEST STANDARD                           | 46          |
| 4.2.5 TEST SETUP                                             | 47          |
| 4.2.6 TEST RESULTS-BELOW 1GHZ                                | 47          |
| 4.2.7 TEST RESULTS-ABOVE 1GHZ                                | 76          |

### REPORT ISSUED HISTORY

| Issued No.           | Description                                                                                                                                                                                                                                                                                    | Issued Date   |
|----------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------|
| BTL-FCCE-1-1607C287  | Original report.                                                                                                                                                                                                                                                                               | Aug. 18, 2016 |
| BTL-FCCE-1-1607C287B | <p>Compared with the previous report (BTL-FCCE-1-1607C287),</p> <p>A. The PA SKY78117-14 change to SKY78117-14A.</p> <p>B. The PA SKY78114-14 change to SKY78114-21.</p> <p>So the radiated test items have been re-evaluated and recorded in the test report, the rest are kept the same.</p> | Jun. 28, 2017 |

## 1. CERIFICATION

Equipment : Smart Phone  
Brand Name : HUAWEI  
Model Name : MHA-L29  
Applicant : Huawei Technologies Co.,Ltd.  
Manufacturer: Huawei Technologies Co.,Ltd.  
Address : Administration Building, Headquarters of Huawei Technologies Co., Ltd.,  
Bantian, Longgang District, Shenzhen, 518129, P.R.C  
Factory : Huawei Technologies Co.,Ltd.  
Address : Administration Building, Headquarters of Huawei Technologies Co., Ltd.,  
Bantian, Longgang District, Shenzhen, 518129, P.R.C  
Date of Test : Jul. 28, 2016 ~ Aug. 16, 2016  
Jun. 06, 2017 ~ Jun. 27, 2017  
Test Sample : Engineering Sample  
Standard(s) : FCC Part 15, Subpart B  
ANSI C63.4-2014

The above equipment has been tested and found compliance with the requirement of the relative standards by BTL Inc.

The test data, data evaluation, and equipment configuration contained in our test report (Ref No. BTL-FCCE-1-1607C287B) were obtained utilizing the test procedures, test instruments, test sites that has been accredited by the Authority of TAF according to the ISO-17025 quality assessment standard and technical standard(s).

## 2. SUMMARY OF TEST RESULTS

Test procedures according to the technical standard(s):

| EMC Emission                             |                                  |         |          |         |
|------------------------------------------|----------------------------------|---------|----------|---------|
| Standard(s)                              | Test Item                        | Limit   | Judgment | Remark  |
| FCC Part15, Subpart B<br>ANSI C63.4-2014 | Conducted Emission               | Class B | PASS     |         |
|                                          | Radiated emission<br>Below 1 GHz | Class B | PASS     |         |
|                                          | Radiated emission<br>Above 1 GHz | Class B | PASS     | NOTE(2) |

NOTE:

- (1) " N/A" denotes test is not applicable to this device.
- (2) The EUT's max operating frequency exceeds 108 MHz, so the test will be performed.

## 2.1 TEST FACILITY

The test facilities used to collect the test data in this report at the location of No.3, Jinshagang 1st Road, Shixia, Dalang Town, Dongguan, Guangdong, China.

## 2.2 MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2. The BTL measurement uncertainty is less than the CISPR 16-4-2  $U_{\text{CISPR}}$  requirement.

The reported uncertainty of measurement  $y \pm U$ , where expanded uncertainty  $U$  is based on a standard uncertainty multiplied by a coverage factor of  $k=2$ , providing a level of confidence of approximately 95%.

### A. Conducted Measurement :

| Test Site | Method | Measurement Frequency Range | U,(dB) |
|-----------|--------|-----------------------------|--------|
| DG-C01    | CISPR  | 150 kHz ~ 30MHz             | 3.16   |

### B. Radiated Measurement :

| Test Site       | Method | Measurement Frequency Range | Ant.<br>H / V | U, (dB) |
|-----------------|--------|-----------------------------|---------------|---------|
| DG-CB03<br>(3m) | CISPR  | 9KHz ~ 30MHz                | V             | 3.79    |
|                 |        | 9KHz ~ 30MHz                | H             | 3.57    |
|                 |        | 30MHz ~ 200MHz              | V             | 3.82    |
|                 |        | 30MHz ~ 200MHz              | H             | 3.78    |
|                 |        | 200MHz ~ 1,000MHz           | V             | 4.10    |
|                 |        | 200MHz ~ 1,000MHz           | H             | 4.06    |

| Test Site       | Method | Measurement Frequency Range | Ant.<br>H / V | U, (dB) |
|-----------------|--------|-----------------------------|---------------|---------|
| DG-CB03<br>(3m) | CISPR  | 1GHz ~ 18GHz                | V             | 3.12    |
|                 |        | 1GHz ~ 18GHz                | H             | 3.68    |
|                 |        | 18GHz ~ 40GHz               | V             | 4.15    |
|                 |        | 18GHz ~ 40GHz               | H             | 4.14    |

Note: Unless specifically mentioned, the uncertainty of measurement has not been taken into account to declare the compliance or non-compliance to the specification.

### 3. GENERAL INFORMATION

#### 3.1 GENERAL DESCRIPTION OF EUT

|                  |                                                                                                                                                                                                                                                                                                                 |
|------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Equipment        | Smart Phone                                                                                                                                                                                                                                                                                                     |
| Brand Name       | HUAWEI                                                                                                                                                                                                                                                                                                          |
| Model Name       | MHA-L29                                                                                                                                                                                                                                                                                                         |
| Model Difference | NA                                                                                                                                                                                                                                                                                                              |
| HW Version       | HL1AMHAM                                                                                                                                                                                                                                                                                                        |
| SW Version       | M300-L29C900B095                                                                                                                                                                                                                                                                                                |
| Frequency        | GSM 850/1900<br>WCDMA B2/4/5<br>LTE B2/4/5/7/12/17/26/29/38/41<br>BT 4.0<br>Wi-Fi: 802.11a/b/g/n/ac<br>NFC:13.56<br>GPS:1575.42                                                                                                                                                                                 |
| Power Source     | #1 DC Voltage supplied from AC/DC adapter.<br>Manufacturer:<br>(1) DONGGUAN PHITEK ELECTRONICS CO.,LTD.<br>(2) SHENZHEN HUNTKEY ELECTRONIC CO.,LTD.<br>(3) Salcomp (Shenzhen)Co.,Ltd<br>Model:<br>HW-050450E00 (EU)<br>HW-050450A00 (AU)<br>HW-050450B00 (UK)<br>HW-050450U00 (US)<br>#2 Supplied from battery. |
| Power Rating     | #1 I/P: ~100V-240V-5V 0.75A O/P: 5V === 2A/5A<br>#2 DC +3.82V                                                                                                                                                                                                                                                   |

Note:

1. For a more detailed features description, please refer to the manufacturer's specifications or the user's manual.
- 2.

| Item      | Mfr/Brand                                        | Model.              |
|-----------|--------------------------------------------------|---------------------|
| Battery   | Sunwoda Electronic Co., LTD                      | HB396689ECW         |
|           | SCUD (FUJIAN) Electronics Co., Ltd               |                     |
|           | Desay Battery Co., Ltd.                          |                     |
| USB Cable | Kangrui Electronics (shenzhen) Co., Ltd.         | 801-CD-U0412-1262   |
|           | LUXSHARE-ICT Co., Ltd.                           | L99UC018-CS-H       |
|           | Chang Shu Honglin Technology Co.,Ltd.            | 130-27309           |
| Earphone  | JIANGXI LIANCHUANG HONGSHENG ELECTRONIC CO., LTD | MEMD1632B580C00     |
|           | BOLUO COUNTY QUANCHENG ELECTRONIC CO., LTD       | 1311-3291-3.5mm-229 |
|           | MERRY ELECTRONICS (SHENZHEN) CO., LTD.           | EMC309-001          |

### 3.2 DESCRIPTION OF TEST MODES

To investigate the maximum EMI emission characteristics generated from EUT, the test system was pre-scanning tested base on the consideration of following EUT operation mode or test configuration mode which possible have effect on EMI emission level. Each of these EUT operation mode(s) or test configuration mode(s) mentioned above was evaluated respectively.

| Pretest Mode | Description                                      |
|--------------|--------------------------------------------------|
| Mode 1       | USB copy(EUT with PC)+Idle+ Earphone             |
| Mode 2       | Adapter+Idle+BT+2.4G WIFI+GPS+Camera on+Earphone |
| Mode 3       | Adapter+Idle+BT+5G WIFI+GPS+Camera on+Earphone   |
| Mode 4       | Adapter+Idle+Playing+Speaker                     |
| Mode 5       | Adapter+Traffic (GSM)+ Earphone                  |
| Mode 6       | Adapter+Traffic (WCDMA)                          |
| Mode 7       | Adapter+Traffic (LTE)                            |


| For Conducted Test |                                                  |
|--------------------|--------------------------------------------------|
| Final Test Mode    | Description                                      |
| Mode 1             | USB copy(EUT with PC)+Idle+ Earphone             |
| Mode 2             | Adapter+Idle+BT+2.4G WIFI+GPS+Camera on+Earphone |
| Mode 3             | Adapter+Idle+BT+5G WIFI+GPS+Camera on+Earphone   |
| Mode 4             | Adapter+Idle+Playing+Speaker                     |
| Mode 5             | Adapter+Traffic (GSM)+ Earphone                  |
| Mode 6             | Adapter+Traffic (WCDMA)                          |
| Mode 7             | Adapter+Traffic (LTE)                            |

| For Radiated Test |                                                  |
|-------------------|--------------------------------------------------|
| Final Test Mode   | Description                                      |
| Mode 1            | USB copy(EUT with PC)+Idle+ Earphone             |
| Mode 2            | Adapter+Idle+BT+2.4G WIFI+GPS+Camera on+Earphone |
| Mode 3            | Adapter+Idle+BT+5G WIFI+GPS+Camera on+Earphone   |
| Mode 4            | Adapter+Idle+Playing+Speaker                     |
| Mode 5            | Adapter+Traffic (GSM)+ Earphone                  |
| Mode 6            | Adapter+Traffic (WCDMA)                          |
| Mode 7            | Adapter+Traffic (LTE)                            |


### 3.3 EUT OPERATING CONDITIONS

The EUT exercise program used during radiated and/or conducted emission measurement was designed to exercise the various system components in a manner similar to a typical use.

### 3.4 BLOCK DIAGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED Mode 1

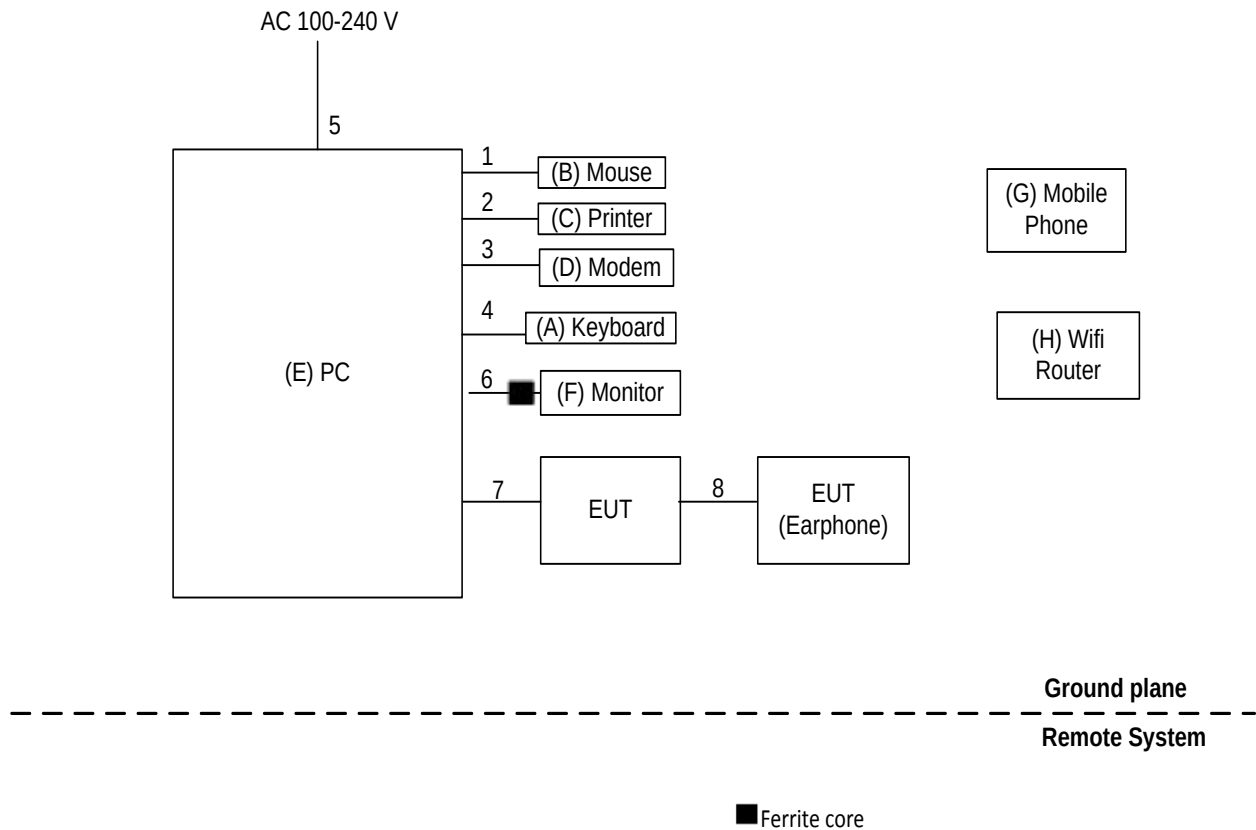

## Mode 2-7

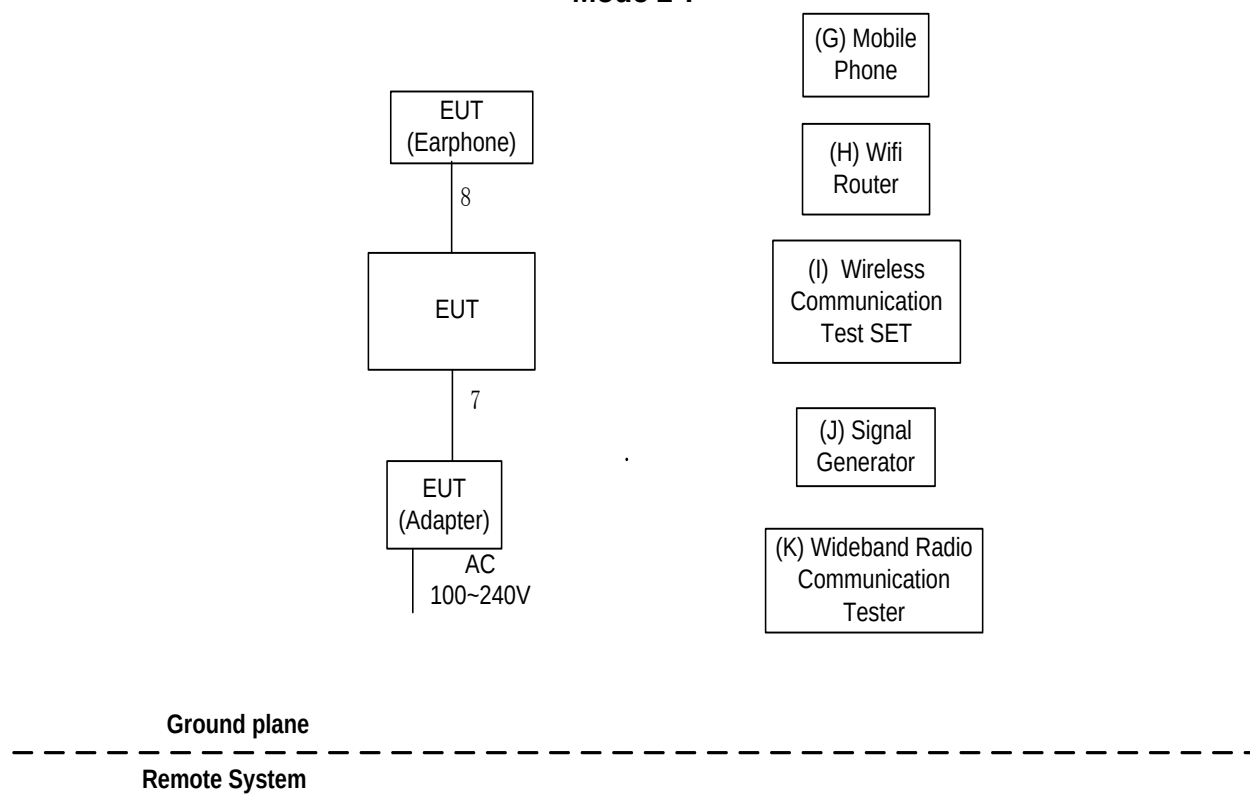

### 3.5 DESCRIPTION OF SUPPORT UNITS

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

| Item | Equipment                           | Mfr/Brand | Model/Type No. | FCC ID     | Series No.              |
|------|-------------------------------------|-----------|----------------|------------|-------------------------|
| A    | USB Keyboard                        | Dell      | L100           | DOC        | CNORH6596589071T08NE    |
| B    | USB Mouse                           | Dell      | MO56UOA        | DOC        | FQJ000BS                |
| C    | Printer                             | SII       | DPU-414        | DOC        | 3018507 B               |
| D    | Modem                               | ACEEX     | DM-1414V       | IFAXDM1414 | 0603002131              |
| E    | PC                                  | Dell      | DCSM 745       | DOC        | G7K832X                 |
| F    | LCD monitor                         | Dell      | E177FPC        | DOC        | CNOFJ179-64180-6AG-1WNS |
| G    | Mobile phone                        | samsung   | SGH-1747       | A3LSGH1747 | R31C208VLDB             |
| H    | Router                              | TP-LINK   | TL-WR1041N     | N/A        | N/A                     |
| I    | Wireless Communication Test SET     | Agilent   | (8960 Series)  | N/A        | MY48364183              |
| J    | Signal Generator                    | Agilent   | E4438C         | N/A        | MY49071316              |
| K    | Wideband Radio Communication Tester | RS        | CMW500         | N/A        | 122125                  |

| Item | Shielded Type | Ferrite Core | Length | Note           |
|------|---------------|--------------|--------|----------------|
| 1    | YES           | NO           | 1.8m   | USB Cable      |
| 2    | YES           | NO           | 1.8m   | Parallel Cable |
| 3    | YES           | NO           | 1.8m   | RS232 Cable    |
| 4    | YES           | NO           | 1.8m   | USB Cable      |
| 5    | NO            | NO           | 1.8m   | AC power Cable |
| 6    | YES           | YES          | 1.8m   | D-SUB Cable    |
| 7    | YES           | NO           | 1m     | USB Cable      |
| 8    | NO            | NO           | 1.2m   | Earphone Cable |

## 4. EMC EMISSION TEST

### 4.1 CONDUCTED EMISSION MEASUREMENT

#### 4.1.1 POWER LINE CONDUCTED EMISSION (FREQUENCY RANGE 150KHZ-30MHZ)

| FREQUENCY (MHz) | Class A (dBuV) |         | Class B (dBuV) |           |
|-----------------|----------------|---------|----------------|-----------|
|                 | Quasi-peak     | Average | Quasi-peak     | Average   |
| 0.15 -0.5       | 79.00          | 66.00   | 66 - 56 *      | 56 - 46 * |
| 0.50 -5.0       | 73.00          | 60.00   | 56.00          | 46.00     |
| 5.0 -30.0       | 73.00          | 60.00   | 60.00          | 50.00     |

Note:

- (1) The tighter limit applies at the band edges.
- (2) The limit of " \* " marked band means the limitation decreases linearly with the logarithm of the frequency in the range.
- (3) The test result calculated as following:  
 Measurement Value = Reading Level + Correct Factor  
 Correct Factor = Insertion Loss + Cable Loss + Attenuator Factor(if use)  
 Margin Level = Measurement Value - Limit Value

#### 4.1.2 MEASUREMENT INSTRUMENTS LIST

| 没<br>Item | Kind of Equipment        | Manufacturer | Type No.                 | Serial No. | Calibrated until |
|-----------|--------------------------|--------------|--------------------------|------------|------------------|
| 1         | Artificial-Mains Network | SCHWARZBECK  | NSLK 8127                | 8127685    | Nov. 20, 2016    |
| 2         | LISN                     | R&S          | ENV216                   | 100526     | Mar. 27, 2017    |
| 3         | Test Cable               | N/A          | RG400 12m                | N/A        | Mar. 10, 2017    |
| 4         | EMI Test Receiver        | R&S          | ESR3                     | 101862     | Nov. 20, 2016    |
| 5         | 50Ω Terminator           | SHX          | TF2-3G-A                 | 08122901   | Mar. 27, 2017    |
| 6         | Measurement Software     | Farad        | EZ-EMC<br>Ver.NB-03A1-01 | N/A        | N/A              |

Remark: "N/A" denotes no model name, serial no. or calibration specified.

All calibration period of equipment list is one year.


#### 4.1.3 TEST PROCEDURE

- The EUT was placed 0.8 meters from the horizontal ground plane with EUT being connected to the power mains through a line impedance stabilization network (LISN). All other support equipments powered from additional LISN(s). The LISN provide 50 Ohm/ 50uH of coupling impedance for the measuring instrument.
- Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.
- I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
- LISN at least 80 cm from nearest part of EUT chassis.
- For the actual test configuration, please refer to the related Item –EUT Test Photos.
- First the whole spectrum of emission caused by equipment under test(EUT) is recorded with Detector set to peak. Peak value recorded in table if the margin from QP Limit is larger than 2dB, otherwise, QP value is recorded, Measuring frequency range from 150KHz to 30MHz.

#### 4.1.4 DEVIATION FROM TEST STANDARD

No deviation

#### 4.1.5 TEST SETUP

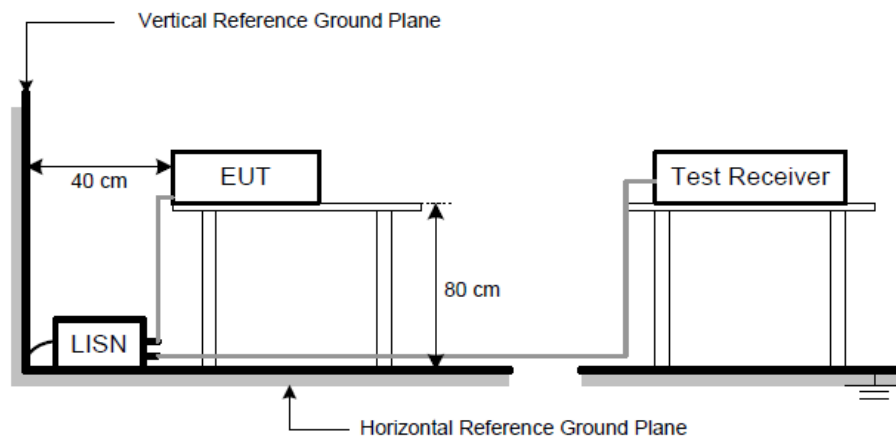

#### 4.1.6 EUT OPERATING CONDITIONS

The EUT exercise program used during radiated and/or conducted emission measurement was designed to exercise the various system components in a manner similar to a typical use.


#### 4.1.7 TEST RESULTS

Remark:

- (1) Reading in which marked as QP means measurements by using are Quasi-Peak Mode with Detector BW=9KHz; SPA setting in RBW=10KHz,VBW =10KHz, Swp. Time = 0.3 sec./MHz. Reading in which marked as AV means measurements by using are Average Mode with instrument setting in RBW=10KHz,VBW=10KHz, Swp. Time =0.3 sec./MHz.
- (2) All readings are QP Mode value unless otherwise stated AVG in column of 『Note』. If the QP Mode Measured value compliance with the QP Limits and lower than AVG Limits, the EUT shall be deemed to meet both QP & AVG Limits and then only QP Mode was measured, but AVG Mode didn't perform. In this case, a “ \* ” marked in AVG Mode column of Interference Voltage Measured.

|               |                                                          |                   |          |
|---------------|----------------------------------------------------------|-------------------|----------|
| EUT           | Smart Phone                                              | Model Name        | M300-L29 |
| Temperature   | 25°C                                                     | Relative Humidity | 53%      |
| Test Voltage  | AC 120V/60Hz                                             | Phase             | Line     |
| Test Mode     | USB copy(EUT with PC)+Idle+ Earphone                     |                   |          |
| Note          | USB Cable: Honglin +Battery: Desay + Earphone:Lianchuang |                   |          |
| Test Engineer | Kevin Li                                                 |                   |          |


80 dBuV

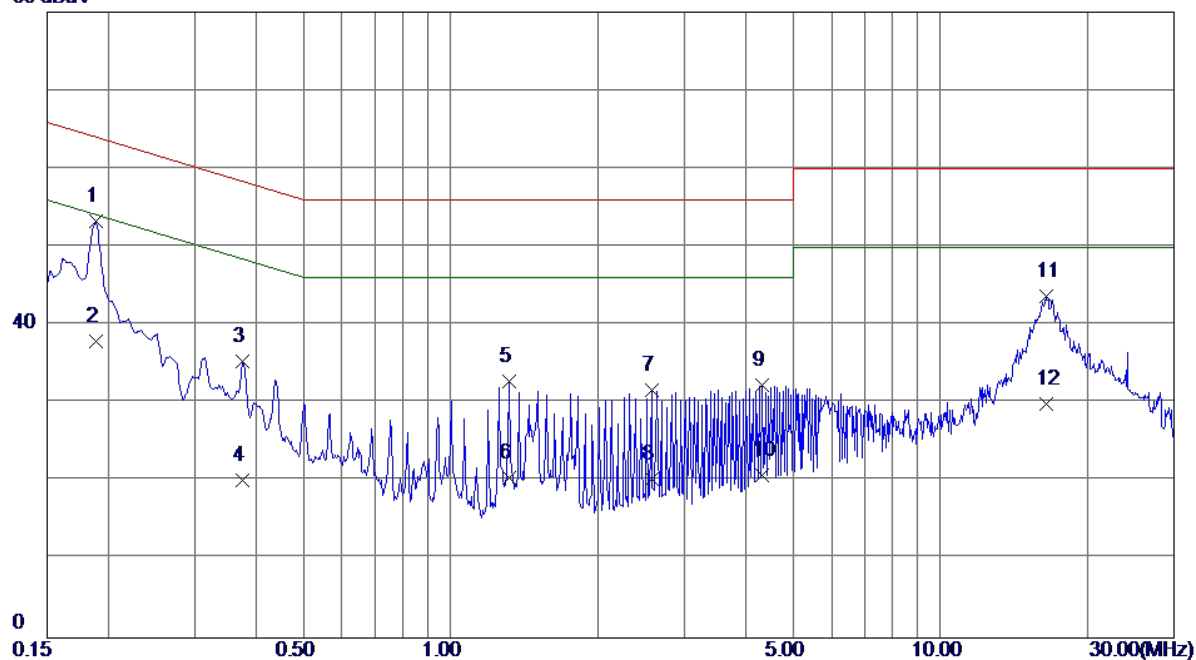

| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV | Limit<br>dBuV | Margin<br>dB | Detector |
|-----|--------------|--------------------------|-------------------------|-------------------------|---------------|--------------|----------|
| 1 * | 0.1883       | 43.65                    | 9.66                    | 53.31                   | 64.11         | -10.80       | QP       |
| 2   | 0.1883       | 28.30                    | 9.66                    | 37.96                   | 54.11         | -16.15       | AVG      |
| 3   | 0.3750       | 25.41                    | 9.90                    | 35.31                   | 58.39         | -23.08       | QP       |
| 4   | 0.3750       | 10.30                    | 9.90                    | 20.20                   | 48.39         | -28.19       | AVG      |
| 5   | 1.3178       | 22.59                    | 10.20                   | 32.79                   | 56.00         | -23.21       | QP       |
| 6   | 1.3178       | 10.30                    | 10.20                   | 20.50                   | 46.00         | -25.50       | AVG      |
| 7   | 2.5733       | 21.67                    | 10.08                   | 31.75                   | 56.00         | -24.25       | QP       |
| 8   | 2.5733       | 10.31                    | 10.08                   | 20.39                   | 46.00         | -25.61       | AVG      |
| 9   | 4.3305       | 22.19                    | 10.08                   | 32.27                   | 56.00         | -23.73       | QP       |
| 10  | 4.3305       | 10.80                    | 10.08                   | 20.88                   | 46.00         | -25.12       | AVG      |
| 11  | 16.4400      | 32.94                    | 10.68                   | 43.62                   | 60.00         | -16.38       | QP       |
| 12  | 16.4400      | 19.30                    | 10.68                   | 29.98                   | 50.00         | -20.02       | AVG      |

|               |                                                          |                   |          |
|---------------|----------------------------------------------------------|-------------------|----------|
| EUT           | Smart Phone                                              | Model Name        | M300-L29 |
| Temperature   | 25°C                                                     | Relative Humidity | 53%      |
| Test Voltage  | AC 120V/60Hz                                             | Phase             | Neutral  |
| Test Mode     | USB copy(EUT with PC)+Idle+ Earphone                     |                   |          |
| Note          | USB Cable: Honglin +Battery: Desay + Earphone:Lianchuang |                   |          |
| Test Engineer | Kevin Li                                                 |                   |          |


80 dBuV

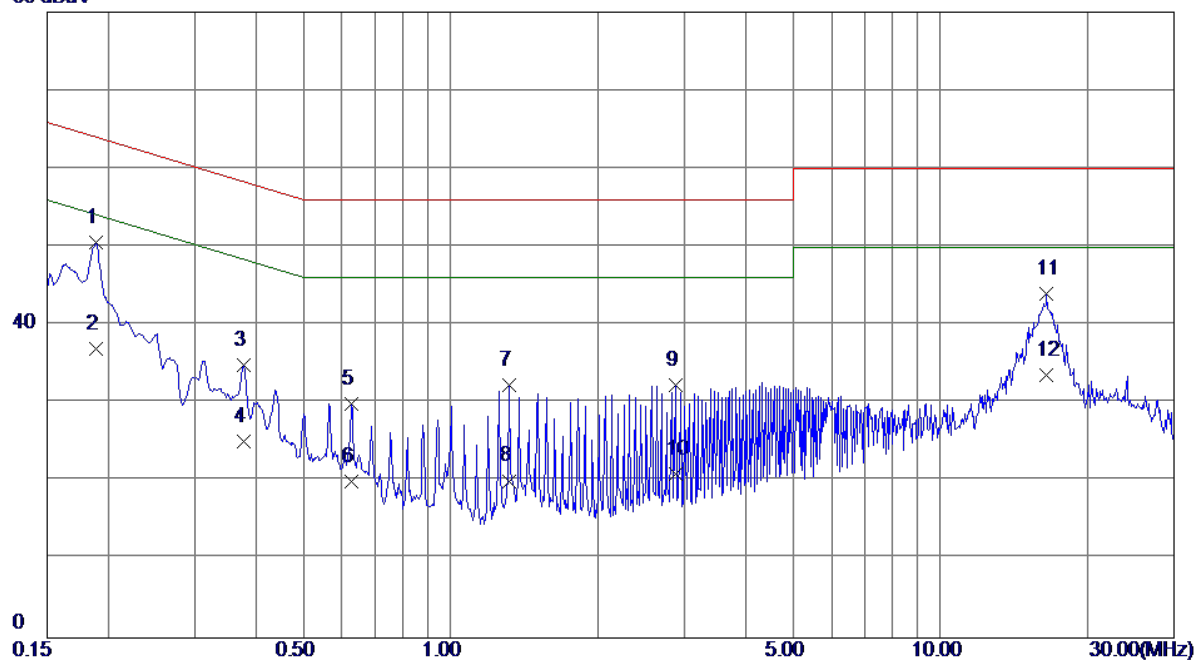

| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV | Limit<br>dBuV | Margin<br>dB | Detector |
|-----|--------------|--------------------------|-------------------------|-------------------------|---------------|--------------|----------|
| 1 * | 0.1883       | 40.98                    | 9.62                    | 50.60                   | 64.11         | -13.51       | QP       |
| 2   | 0.1883       | 27.30                    | 9.62                    | 36.92                   | 54.11         | -17.19       | AVG      |
| 3   | 0.3772       | 25.15                    | 9.75                    | 34.90                   | 58.34         | -23.44       | QP       |
| 4   | 0.3772       | 15.30                    | 9.75                    | 25.05                   | 48.34         | -23.29       | AVG      |
| 5   | 0.6270       | 20.13                    | 9.84                    | 29.97                   | 56.00         | -26.03       | QP       |
| 6   | 0.6270       | 10.20                    | 9.84                    | 20.04                   | 46.00         | -25.96       | AVG      |
| 7   | 1.3178       | 22.38                    | 9.98                    | 32.36                   | 56.00         | -23.64       | QP       |
| 8   | 1.3178       | 10.10                    | 9.98                    | 20.08                   | 46.00         | -25.92       | AVG      |
| 9   | 2.8860       | 22.28                    | 10.03                   | 32.31                   | 56.00         | -23.69       | QP       |
| 10  | 2.8860       | 11.00                    | 10.03                   | 21.03                   | 46.00         | -24.97       | AVG      |
| 11  | 16.4963      | 33.35                    | 10.61                   | 43.96                   | 60.00         | -16.04       | QP       |
| 12  | 16.4963      | 23.00                    | 10.61                   | 33.61                   | 50.00         | -16.39       | AVG      |

|               |                                                           |                   |          |
|---------------|-----------------------------------------------------------|-------------------|----------|
| EUT           | Smart Phone                                               | Model Name        | M300-L29 |
| Temperature   | 25°C                                                      | Relative Humidity | 53%      |
| Test Voltage  | AC 120V/60Hz                                              | Phase             | Line     |
| Test Mode     | USB copy(EUT with PC)+Idle+ Earphone                      |                   |          |
| Note          | USB Cable: CONNREX +Battery: Sunwoda + Earphone:QUANCHENG |                   |          |
| Test Engineer | Kevin Li                                                  |                   |          |


80 dBuV

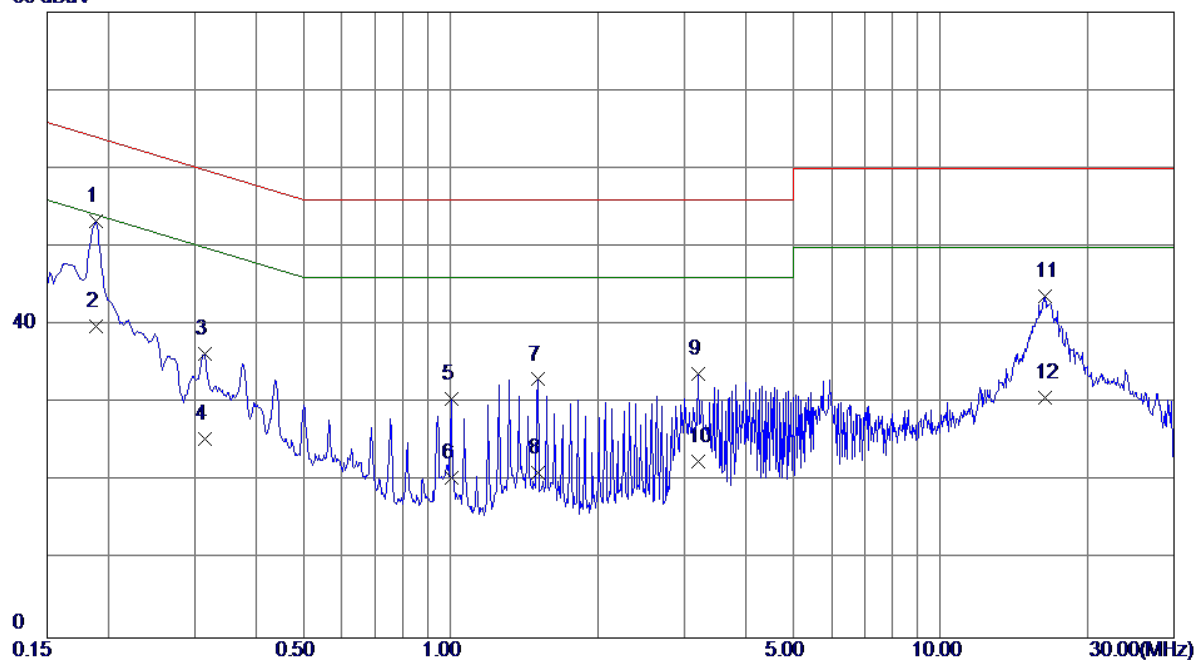

| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV | Limit<br>dBuV | Margin<br>dB | Detector |
|-----|--------------|--------------------------|-------------------------|-------------------------|---------------|--------------|----------|
| 1 * | 0.1883       | 43.60                    | 9.66                    | 53.26                   | 64.11         | -10.85       | QP       |
| 2   | 0.1883       | 30.20                    | 9.66                    | 39.86                   | 54.11         | -14.25       | AVG      |
| 3   | 0.3141       | 26.40                    | 9.85                    | 36.25                   | 59.86         | -23.61       | QP       |
| 4   | 0.3141       | 15.60                    | 9.85                    | 25.45                   | 49.86         | -24.41       | AVG      |
| 5   | 1.0027       | 20.46                    | 10.12                   | 30.58                   | 56.00         | -25.42       | QP       |
| 6   | 1.0027       | 10.30                    | 10.12                   | 20.42                   | 46.00         | -25.58       | AVG      |
| 7   | 1.5045       | 22.90                    | 10.14                   | 33.04                   | 56.00         | -22.96       | QP       |
| 8   | 1.5045       | 10.91                    | 10.14                   | 21.05                   | 46.00         | -24.95       | AVG      |
| 9   | 3.1988       | 23.68                    | 10.03                   | 33.71                   | 56.00         | -22.29       | QP       |
| 10  | 3.1988       | 12.50                    | 10.03                   | 22.53                   | 46.00         | -23.47       | AVG      |
| 11  | 16.3658      | 33.05                    | 10.68                   | 43.73                   | 60.00         | -16.27       | QP       |
| 12  | 16.3658      | 20.10                    | 10.68                   | 30.78                   | 60.00         | -29.22       | QP       |

|               |                                                           |                   |          |
|---------------|-----------------------------------------------------------|-------------------|----------|
| EUT           | Smart Phone                                               | Model Name        | M300-L29 |
| Temperature   | 25°C                                                      | Relative Humidity | 53%      |
| Test Voltage  | AC 120V/60Hz                                              | Phase             | Neutral  |
| Test Mode     | USB copy(EUT with PC)+Idle+ Earphone                      |                   |          |
| Note          | USB Cable: CONNREX +Battery: Sunwoda + Earphone:QUANCHENG |                   |          |
| Test Engineer | Kevin Li                                                  |                   |          |


80 dBuV

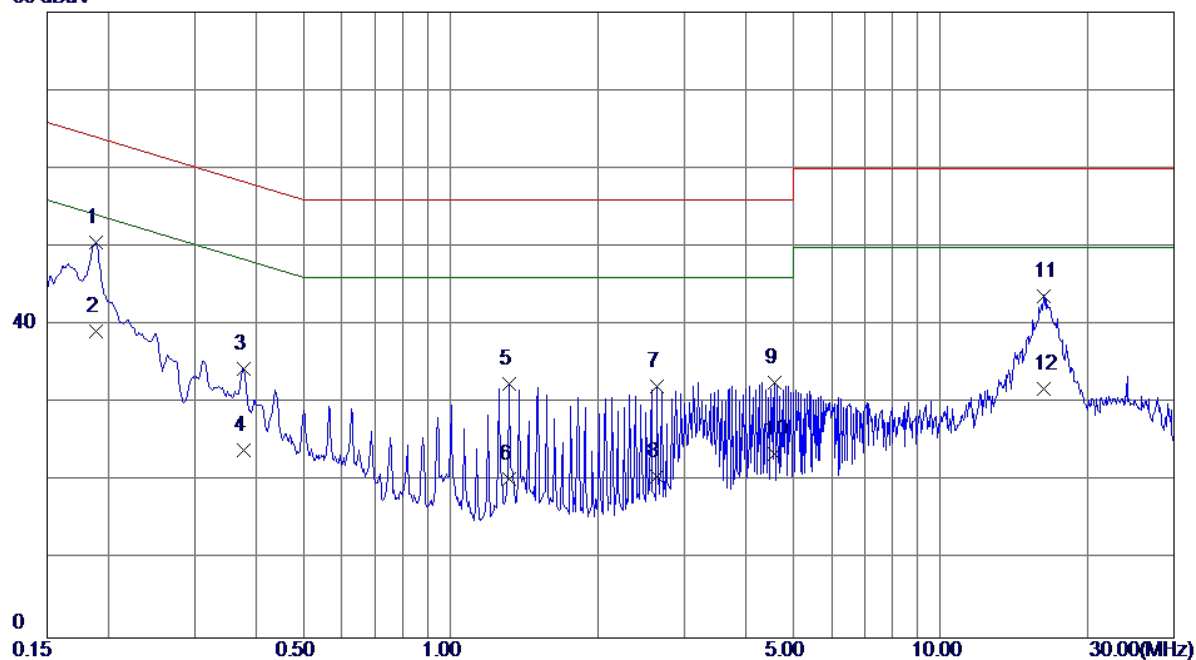

| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV | Limit<br>dBuV | Margin<br>dB | Detector |
|-----|--------------|--------------------------|-------------------------|-------------------------|---------------|--------------|----------|
| 1 * | 0.1882       | 40.90                    | 9.62                    | 50.52                   | 64.12         | -13.60       | QP       |
| 2   | 0.1882       | 29.60                    | 9.62                    | 39.22                   | 54.12         | -14.90       | AVG      |
| 3   | 0.3772       | 24.70                    | 9.75                    | 34.45                   | 58.34         | -23.89       | QP       |
| 4   | 0.3772       | 14.30                    | 9.75                    | 24.05                   | 48.34         | -24.29       | AVG      |
| 5   | 1.3177       | 22.46                    | 9.98                    | 32.44                   | 56.00         | -23.56       | QP       |
| 6   | 1.3177       | 10.30                    | 9.98                    | 20.28                   | 46.00         | -25.72       | AVG      |
| 7   | 2.6340       | 22.02                    | 10.07                   | 32.09                   | 56.00         | -23.91       | QP       |
| 8   | 2.6340       | 10.60                    | 10.07                   | 20.67                   | 46.00         | -25.33       | AVG      |
| 9   | 4.5780       | 22.40                    | 10.25                   | 32.65                   | 56.00         | -23.35       | QP       |
| 10  | 4.5780       | 13.20                    | 10.25                   | 23.45                   | 46.00         | -22.55       | AVG      |
| 11  | 16.3072      | 33.15                    | 10.61                   | 43.76                   | 60.00         | -16.24       | QP       |
| 12  | 16.3072      | 21.30                    | 10.61                   | 31.91                   | 50.00         | -18.09       | AVG      |

|               |                                                             |                   |          |
|---------------|-------------------------------------------------------------|-------------------|----------|
| EUT           | Smart Phone                                                 | Model Name        | M300-L29 |
| Temperature   | 25°C                                                        | Relative Humidity | 53%      |
| Test Voltage  | AC 120V/60Hz                                                | Phase             | Line     |
| Test Mode     | USB copy(EUT with PC)+Idle+ Earphone                        |                   |          |
| Note          | USB Cable: LUXSHAREICT +Battery: SCUD + Earphone:Lianchuang |                   |          |
| Test Engineer | Kevin Li                                                    |                   |          |


80 dBuV

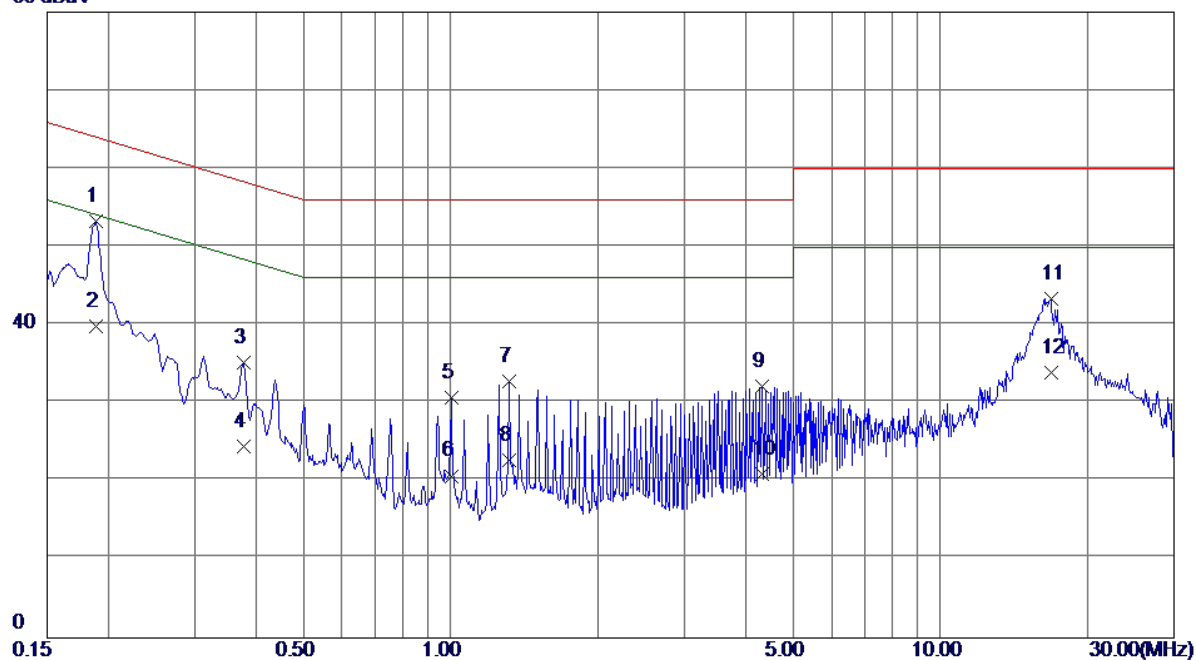

| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV | Limit<br>dBuV | Margin<br>dB | Detector |
|-----|--------------|--------------------------|-------------------------|-------------------------|---------------|--------------|----------|
| 1 * | 0.1883       | 43.57                    | 9.66                    | 53.23                   | 64.11         | -10.88       | QP       |
| 2   | 0.1883       | 30.20                    | 9.66                    | 39.86                   | 54.11         | -14.25       | AVG      |
| 3   | 0.3772       | 25.32                    | 9.90                    | 35.22                   | 58.34         | -23.12       | QP       |
| 4   | 0.3772       | 14.60                    | 9.90                    | 24.50                   | 48.34         | -23.84       | AVG      |
| 5   | 1.0027       | 20.56                    | 10.12                   | 30.68                   | 56.00         | -25.32       | QP       |
| 6   | 1.0027       | 10.60                    | 10.12                   | 20.72                   | 46.00         | -25.28       | AVG      |
| 7   | 1.3178       | 22.64                    | 10.20                   | 32.84                   | 56.00         | -23.16       | QP       |
| 8   | 1.3178       | 12.50                    | 10.20                   | 22.70                   | 46.00         | -23.30       | AVG      |
| 9   | 4.3260       | 22.14                    | 10.08                   | 32.22                   | 56.00         | -23.78       | QP       |
| 10  | 4.3260       | 10.90                    | 10.08                   | 20.98                   | 46.00         | -25.02       | AVG      |
| 11  | 16.8068      | 32.66                    | 10.68                   | 43.34                   | 60.00         | -16.66       | QP       |
| 12  | 16.8068      | 23.30                    | 10.68                   | 33.98                   | 50.00         | -16.02       | AVG      |

|               |                                                             |                   |          |
|---------------|-------------------------------------------------------------|-------------------|----------|
| EUT           | Smart Phone                                                 | Model Name        | M300-L29 |
| Temperature   | 25°C                                                        | Relative Humidity | 53%      |
| Test Voltage  | AC 120V/60Hz                                                | Phase             | Neutral  |
| Test Mode     | USB copy(EUT with PC)+Idle+ Earphone                        |                   |          |
| Note          | USB Cable: LUXSHAREICT +Battery: SCUD + Earphone:Lianchuang |                   |          |
| Test Engineer | Kevin Li                                                    |                   |          |


80 dBuV

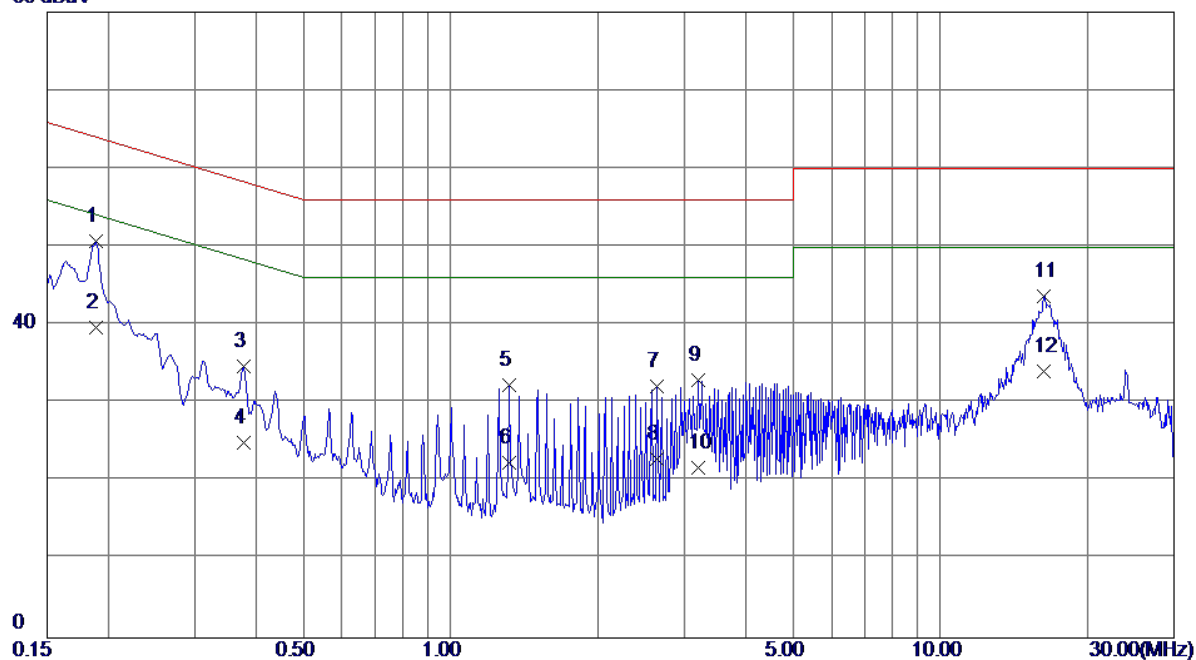

| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV | Limit<br>dBuV | Margin<br>dB | Detector |
|-----|--------------|--------------------------|-------------------------|-------------------------|---------------|--------------|----------|
| 1 * | 0.1883       | 41.05                    | 9.62                    | 50.67                   | 64.11         | -13.44       | QP       |
| 2   | 0.1883       | 30.10                    | 9.62                    | 39.72                   | 54.11         | -14.39       | AVG      |
| 3   | 0.3772       | 24.96                    | 9.75                    | 34.71                   | 58.34         | -23.63       | QP       |
| 4   | 0.3772       | 15.20                    | 9.75                    | 24.95                   | 48.34         | -23.39       | AVG      |
| 5   | 1.3178       | 22.32                    | 9.98                    | 32.30                   | 56.00         | -23.70       | QP       |
| 6   | 1.3178       | 12.40                    | 9.98                    | 22.38                   | 46.00         | -23.62       | AVG      |
| 7   | 2.6340       | 22.09                    | 10.07                   | 32.16                   | 56.00         | -23.84       | QP       |
| 8   | 2.6340       | 12.80                    | 10.07                   | 22.87                   | 46.00         | -23.13       | AVG      |
| 9   | 3.1988       | 22.98                    | 10.05                   | 33.03                   | 56.00         | -22.97       | QP       |
| 10  | 3.1988       | 11.70                    | 10.05                   | 21.75                   | 46.00         | -24.25       | AVG      |
| 11  | 16.3028      | 33.14                    | 10.61                   | 43.75                   | 60.00         | -16.25       | QP       |
| 12  | 16.3028      | 23.50                    | 10.61                   | 34.11                   | 50.00         | -15.89       | AVG      |

|               |                                                                  |                   |          |
|---------------|------------------------------------------------------------------|-------------------|----------|
| EUT           | Smart Phone                                                      | Model Name        | M300-L29 |
| Temperature   | 25°C                                                             | Relative Humidity | 53%      |
| Test Voltage  | AC 120V/60Hz                                                     | Phase             | Line     |
| Test Mode     | Adapter+Idle+BT+2.4G WIFI+GPS+Camera on+Earphone                 |                   |          |
| Note          | Adapter:Phitek(US)+Honglin +Battery: Desay + Earphone:Lianchuang |                   |          |
| Test Engineer | Kevin Li                                                         |                   |          |


80 dBuV

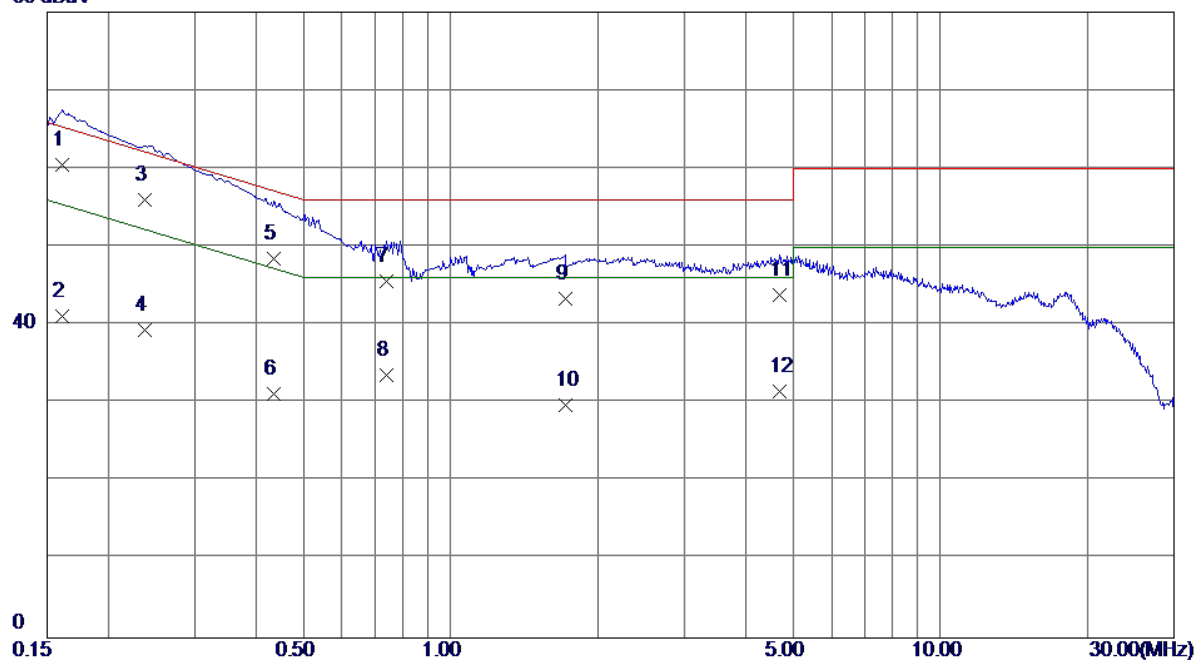

| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV | Limit<br>dBuV | Margin<br>dB | Detector |
|-----|--------------|--------------------------|-------------------------|-------------------------|---------------|--------------|----------|
| 1 * | 0.1613       | 50.90                    | 9.65                    | 60.55                   | 65.40         | -4.85        | QP       |
| 2   | 0.1613       | 31.50                    | 9.65                    | 41.15                   | 55.40         | -14.25       | AVG      |
| 3   | 0.2378       | 46.31                    | 9.76                    | 56.07                   | 62.17         | -6.10        | QP       |
| 4   | 0.2378       | 29.61                    | 9.76                    | 39.37                   | 52.17         | -12.80       | AVG      |
| 5   | 0.4357       | 38.60                    | 9.88                    | 48.48                   | 57.14         | -8.66        | QP       |
| 6   | 0.4357       | 21.30                    | 9.88                    | 31.18                   | 47.14         | -15.96       | AVG      |
| 7   | 0.7395       | 35.60                    | 10.07                   | 45.67                   | 56.00         | -10.33       | QP       |
| 8   | 0.7395       | 23.60                    | 10.07                   | 33.67                   | 46.00         | -12.33       | AVG      |
| 9   | 1.7115       | 33.21                    | 10.11                   | 43.32                   | 56.00         | -12.68       | QP       |
| 10  | 1.7115       | 19.61                    | 10.11                   | 29.72                   | 46.00         | -16.28       | AVG      |
| 11  | 4.6860       | 33.80                    | 10.10                   | 43.90                   | 56.00         | -12.10       | QP       |
| 12  | 4.6860       | 21.40                    | 10.10                   | 31.50                   | 46.00         | -14.50       | AVG      |

|               |                                                                  |                   |          |
|---------------|------------------------------------------------------------------|-------------------|----------|
| EUT           | Smart Phone                                                      | Model Name        | M300-L29 |
| Temperature   | 25°C                                                             | Relative Humidity | 53%      |
| Test Voltage  | AC 120V/60Hz                                                     | Phase             | Neutral  |
| Test Mode     | Adapter+Idle+BT+2.4G WIFI+GPS+Camera on+Earphone                 |                   |          |
| Note          | Adapter:Phitek(US)+Honglin +Battery: Desay + Earphone:Lianchuang |                   |          |
| Test Engineer | Kevin Li                                                         |                   |          |


80 dBuV

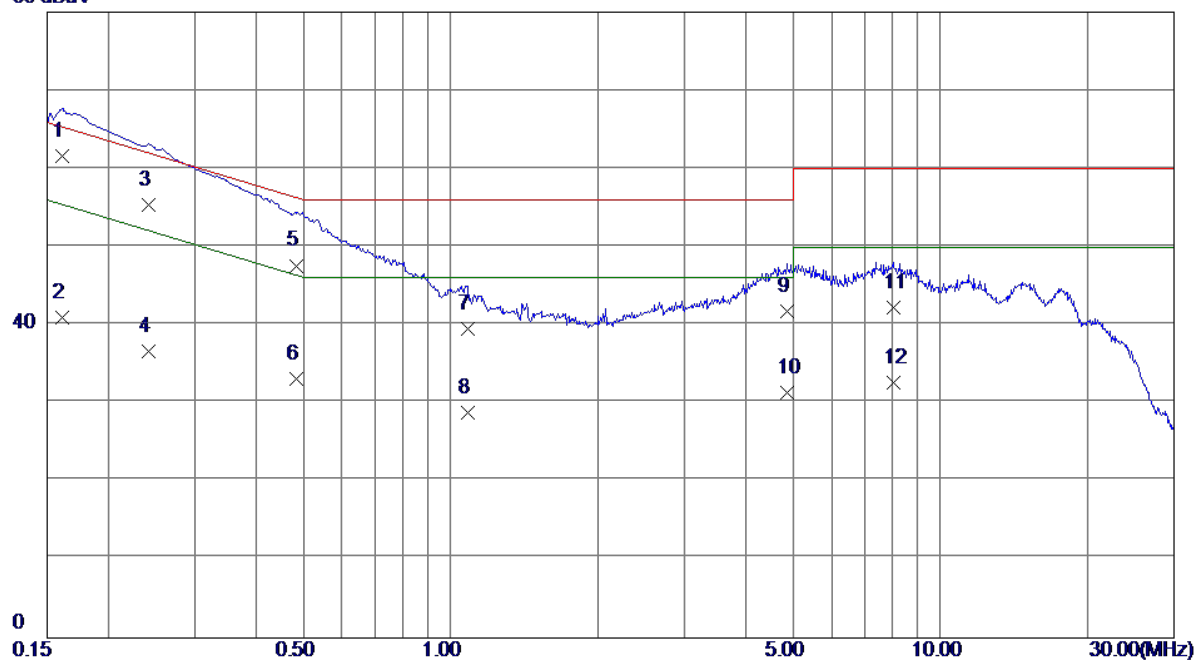

| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV | Limit<br>dBuV | Margin<br>dB | Detector |
|-----|--------------|--------------------------|-------------------------|-------------------------|---------------|--------------|----------|
| 1 * | 0.1612       | 52.00                    | 9.55                    | 61.55                   | 65.40         | -3.85        | QP       |
| 2   | 0.1612       | 31.40                    | 9.55                    | 40.95                   | 55.40         | -14.45       | AVG      |
| 3   | 0.2422       | 45.60                    | 9.69                    | 55.29                   | 62.02         | -6.73        | QP       |
| 4   | 0.2422       | 26.90                    | 9.69                    | 36.59                   | 52.02         | -15.43       | AVG      |
| 5   | 0.4830       | 37.80                    | 9.80                    | 47.60                   | 56.29         | -8.69        | QP       |
| 6   | 0.4830       | 23.30                    | 9.80                    | 33.10                   | 46.29         | -13.19       | AVG      |
| 7   | 1.0814       | 29.60                    | 9.92                    | 39.52                   | 56.00         | -16.48       | QP       |
| 8   | 1.0814       | 18.90                    | 9.92                    | 28.82                   | 46.00         | -17.18       | AVG      |
| 9   | 4.8615       | 31.50                    | 10.29                   | 41.79                   | 56.00         | -14.21       | QP       |
| 10  | 4.8615       | 21.00                    | 10.29                   | 31.29                   | 46.00         | -14.71       | AVG      |
| 11  | 8.0137       | 31.90                    | 10.29                   | 42.19                   | 60.00         | -17.81       | QP       |
| 12  | 8.0137       | 22.40                    | 10.29                   | 32.69                   | 50.00         | -17.31       | AVG      |

|               |                                                                  |                   |          |
|---------------|------------------------------------------------------------------|-------------------|----------|
| EUT           | Smart Phone                                                      | Model Name        | M300-L29 |
| Temperature   | 25°C                                                             | Relative Humidity | 53%      |
| Test Voltage  | AC 120V/60Hz                                                     | Phase             | Line     |
| Test Mode     | Adapter+Idle+BT+2.4G WIFI+GPS+Camera on+Earphone                 |                   |          |
| Note          | Adapter:Phitek(EU)+Honglin +Battery: Desay + Earphone:Lianchuang |                   |          |
| Test Engineer | Kevin Li                                                         |                   |          |


80 dBuV

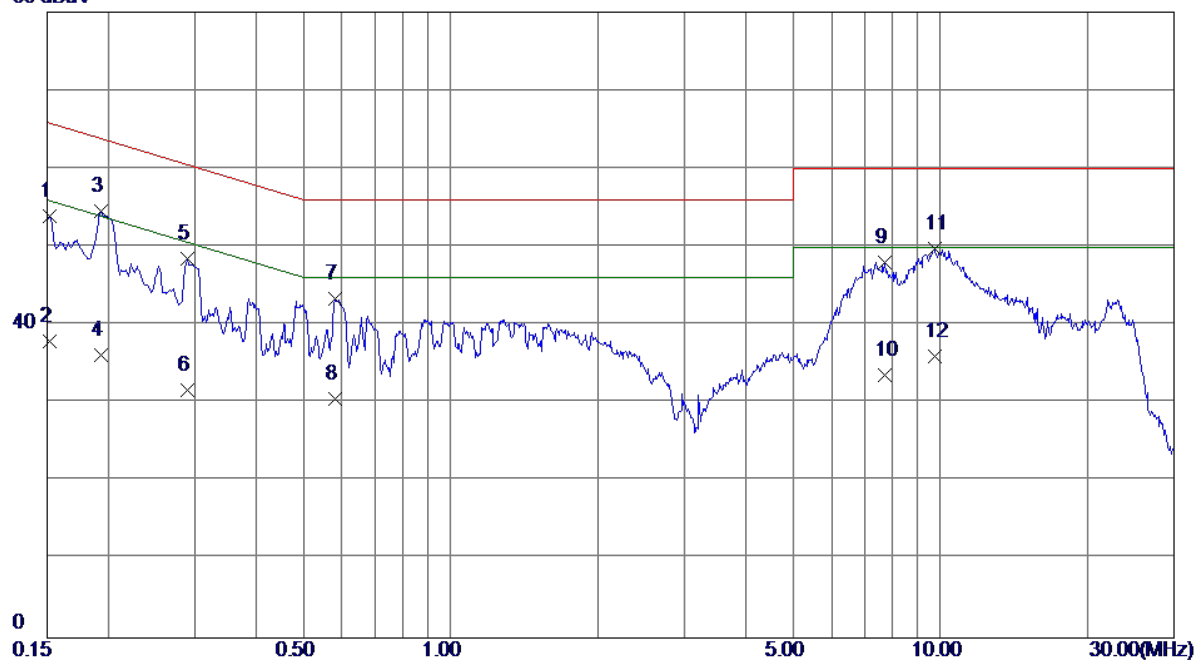

| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV | Limit<br>dBuV | Margin<br>dB | Detector |
|-----|--------------|--------------------------|-------------------------|-------------------------|---------------|--------------|----------|
| 1   | 0.1522       | 44.34                    | 9.64                    | 53.98                   | 65.88         | -11.90       | QP       |
| 2   | 0.1522       | 28.30                    | 9.64                    | 37.94                   | 55.88         | -17.94       | AVG      |
| 3 * | 0.1928       | 44.95                    | 9.67                    | 54.62                   | 63.92         | -9.30        | QP       |
| 4   | 0.1928       | 26.50                    | 9.67                    | 36.17                   | 53.92         | -17.75       | AVG      |
| 5   | 0.2895       | 38.70                    | 9.81                    | 48.51                   | 60.54         | -12.03       | QP       |
| 6   | 0.2895       | 21.80                    | 9.81                    | 31.61                   | 50.54         | -18.93       | AVG      |
| 7   | 0.5797       | 33.29                    | 10.01                   | 43.30                   | 56.00         | -12.70       | QP       |
| 8   | 0.5797       | 20.60                    | 10.01                   | 30.61                   | 46.00         | -15.39       | AVG      |
| 9   | 7.6943       | 37.75                    | 10.25                   | 48.00                   | 60.00         | -12.00       | QP       |
| 10  | 7.6943       | 23.31                    | 10.25                   | 33.56                   | 50.00         | -16.44       | AVG      |
| 11  | 9.7283       | 39.31                    | 10.44                   | 49.75                   | 60.00         | -10.25       | QP       |
| 12  | 9.7283       | 25.59                    | 10.44                   | 36.03                   | 50.00         | -13.97       | AVG      |

|               |                                                                  |                   |          |
|---------------|------------------------------------------------------------------|-------------------|----------|
| EUT           | Smart Phone                                                      | Model Name        | M300-L29 |
| Temperature   | 25°C                                                             | Relative Humidity | 53%      |
| Test Voltage  | AC 120V/60Hz                                                     | Phase             | Neutral  |
| Test Mode     | Adapter+Idle+BT+2.4G WIFI+GPS+Camera on+Earphone                 |                   |          |
| Note          | Adapter:Phitek(EU)+Honglin +Battery: Desay + Earphone:Lianchuang |                   |          |
| Test Engineer | Kevin Li                                                         |                   |          |


80 dBuV

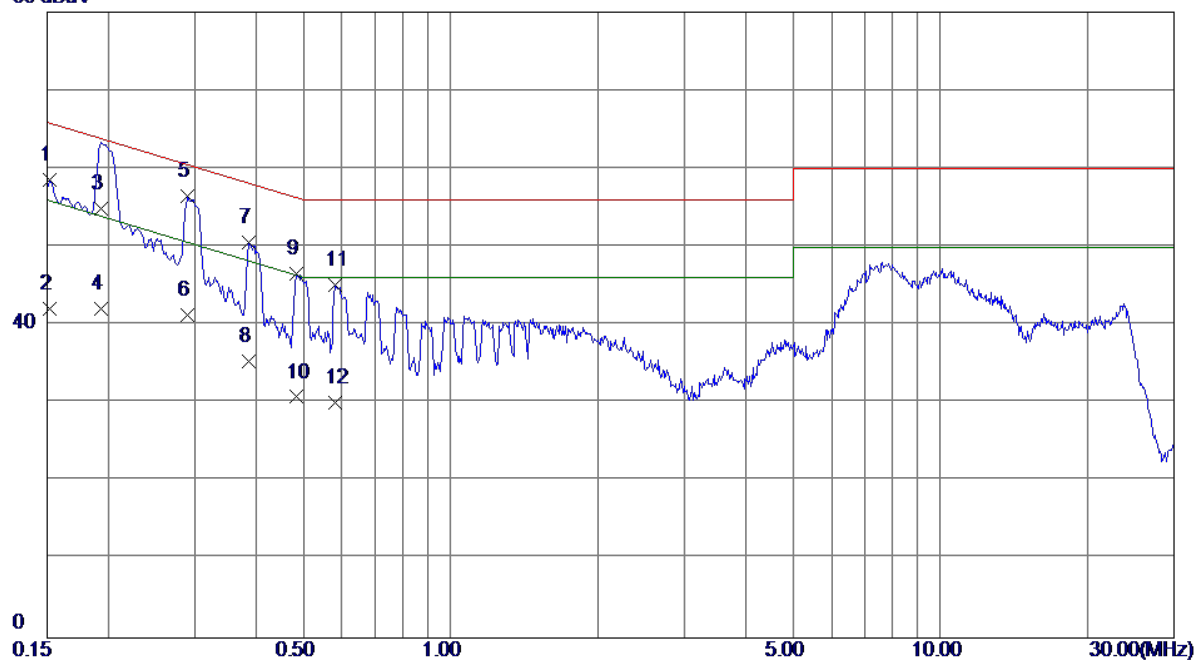

| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV | Limit<br>dBuV | Margin<br>dB | Detector |
|-----|--------------|--------------------------|-------------------------|-------------------------|---------------|--------------|----------|
| 1   | 0.1522       | 48.98                    | 9.54                    | 58.52                   | 65.88         | -7.36        | QP       |
| 2   | 0.1522       | 32.50                    | 9.54                    | 42.04                   | 55.88         | -13.84       | AVG      |
| 3   | 0.1928       | 45.31                    | 9.64                    | 54.95                   | 63.92         | -8.97        | QP       |
| 4   | 0.1928       | 32.41                    | 9.64                    | 42.05                   | 53.92         | -11.87       | AVG      |
| 5 * | 0.2895       | 46.78                    | 9.71                    | 56.49                   | 60.54         | -4.05        | QP       |
| 6   | 0.2895       | 31.50                    | 9.71                    | 41.21                   | 50.54         | -9.33        | AVG      |
| 7   | 0.3862       | 40.78                    | 9.76                    | 50.54                   | 58.15         | -7.61        | QP       |
| 8   | 0.3862       | 25.60                    | 9.76                    | 35.36                   | 48.15         | -12.79       | AVG      |
| 9   | 0.4830       | 36.71                    | 9.80                    | 46.51                   | 56.29         | -9.78        | QP       |
| 10  | 0.4830       | 21.00                    | 9.80                    | 30.80                   | 46.29         | -15.49       | AVG      |
| 11  | 0.5797       | 35.29                    | 9.83                    | 45.12                   | 56.00         | -10.88       | QP       |
| 12  | 0.5797       | 20.30                    | 9.83                    | 30.13                   | 46.00         | -15.87       | AVG      |

|               |                                                                   |                   |          |
|---------------|-------------------------------------------------------------------|-------------------|----------|
| EUT           | Smart Phone                                                       | Model Name        | M300-L29 |
| Temperature   | 25°C                                                              | Relative Humidity | 53%      |
| Test Voltage  | AC 120V/60Hz                                                      | Phase             | Line     |
| Test Mode     | Adapter+Idle+BT+2.4G WIFI+GPS+Camera on+Earphone                  |                   |          |
| Note          | Adapter:Salcomp(US)+Honglin +Battery: Desay + Earphone:Lianchuang |                   |          |
| Test Engineer | Kevin Li                                                          |                   |          |


80 dBuV

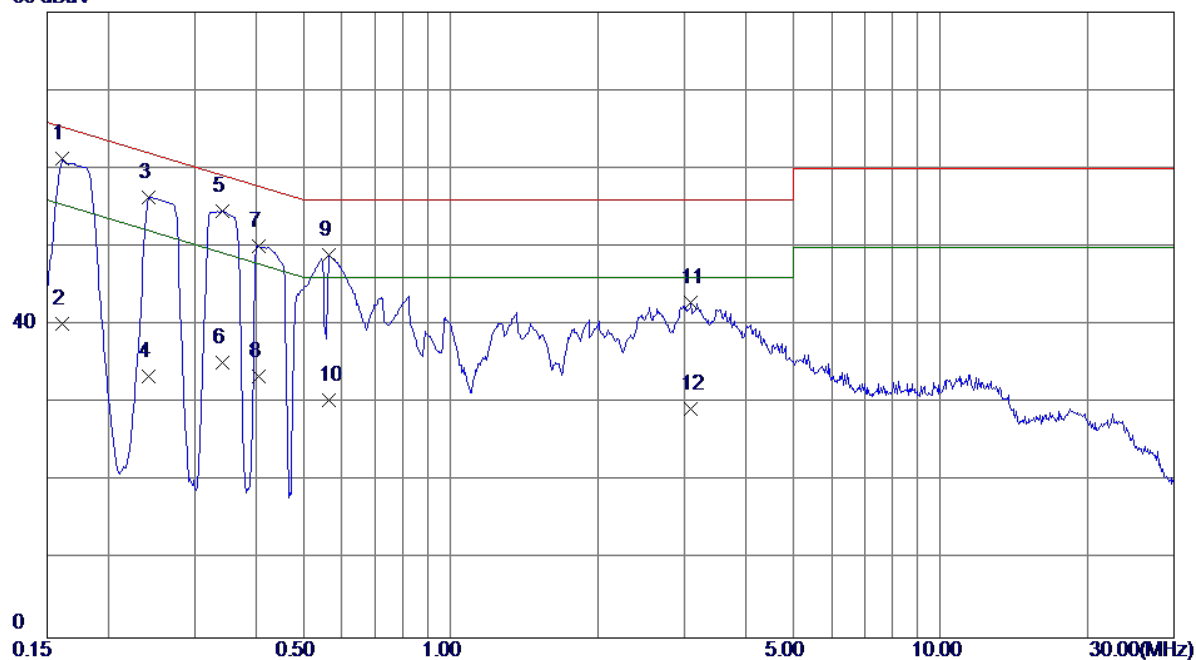

| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV | Limit<br>dBuV | Margin<br>dB | Detector |
|-----|--------------|--------------------------|-------------------------|-------------------------|---------------|--------------|----------|
| 1 * | 0.1612       | 51.58                    | 9.65                    | 61.23                   | 65.40         | -4.17        | QP       |
| 2   | 0.1613       | 30.50                    | 9.65                    | 40.15                   | 55.40         | -15.25       | AVG      |
| 3   | 0.2423       | 46.53                    | 9.77                    | 56.30                   | 62.02         | -5.72        | QP       |
| 4   | 0.2423       | 23.60                    | 9.77                    | 33.37                   | 52.02         | -18.65       | AVG      |
| 5   | 0.3412       | 44.64                    | 9.92                    | 54.56                   | 59.17         | -4.61        | QP       |
| 6   | 0.3412       | 25.30                    | 9.92                    | 35.22                   | 49.17         | -13.95       | AVG      |
| 7   | 0.4065       | 40.19                    | 9.87                    | 50.06                   | 57.72         | -7.66        | QP       |
| 8   | 0.4065       | 23.60                    | 9.87                    | 33.47                   | 47.72         | -14.25       | AVG      |
| 9   | 0.5639       | 38.93                    | 9.99                    | 48.92                   | 56.00         | -7.08        | QP       |
| 10  | 0.5639       | 20.39                    | 9.99                    | 30.38                   | 46.00         | -15.62       | AVG      |
| 11  | 3.0998       | 32.87                    | 10.02                   | 42.89                   | 56.00         | -13.11       | QP       |
| 12  | 3.0998       | 19.30                    | 10.02                   | 29.32                   | 46.00         | -16.68       | AVG      |

|               |                                                                   |                   |          |
|---------------|-------------------------------------------------------------------|-------------------|----------|
| EUT           | Smart Phone                                                       | Model Name        | M300-L29 |
| Temperature   | 25°C                                                              | Relative Humidity | 53%      |
| Test Voltage  | AC 120V/60Hz                                                      | Phase             | Neutral  |
| Test Mode     | Adapter+Idle+BT+2.4G WIFI+GPS+Camera on+Earphone                  |                   |          |
| Note          | Adapter:Salcomp(US)+Honglin +Battery: Desay + Earphone:Lianchuang |                   |          |
| Test Engineer | Kevin Li                                                          |                   |          |


80 dBuV

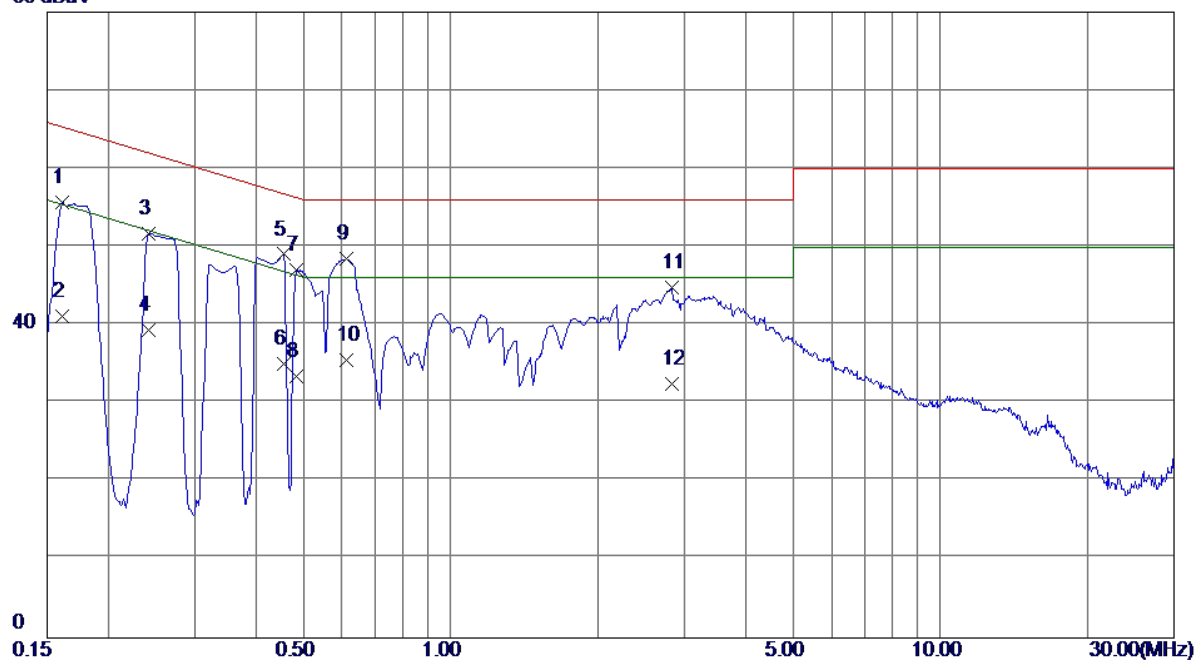

| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV | Limit<br>dBuV | Margin<br>dB | Detector |
|-----|--------------|--------------------------|-------------------------|-------------------------|---------------|--------------|----------|
| 1   | 0.1613       | 46.11                    | 9.55                    | 55.66                   | 65.40         | -9.74        | QP       |
| 2   | 0.1613       | 31.50                    | 9.55                    | 41.05                   | 55.40         | -14.35       | AVG      |
| 3   | 0.2423       | 42.06                    | 9.69                    | 51.75                   | 62.02         | -10.27       | QP       |
| 4   | 0.2423       | 29.60                    | 9.69                    | 39.29                   | 52.02         | -12.73       | AVG      |
| 5   | 0.4560       | 39.25                    | 9.79                    | 49.04                   | 56.77         | -7.73        | QP       |
| 6   | 0.4560       | 25.30                    | 9.79                    | 35.09                   | 46.77         | -11.68       | AVG      |
| 7   | 0.4830       | 37.26                    | 9.80                    | 47.06                   | 56.29         | -9.23        | QP       |
| 8   | 0.4830       | 23.60                    | 9.80                    | 33.40                   | 46.29         | -12.89       | AVG      |
| 9 * | 0.6112       | 38.57                    | 9.84                    | 48.41                   | 56.00         | -7.59        | QP       |
| 10  | 0.6112       | 25.70                    | 9.84                    | 35.54                   | 46.00         | -10.46       | AVG      |
| 11  | 2.8275       | 34.74                    | 10.04                   | 44.78                   | 56.00         | -11.22       | QP       |
| 12  | 2.8275       | 22.40                    | 10.04                   | 32.44                   | 46.00         | -13.56       | AVG      |

|               |                                                                   |                   |          |
|---------------|-------------------------------------------------------------------|-------------------|----------|
| EUT           | Smart Phone                                                       | Model Name        | M300-L29 |
| Temperature   | 25°C                                                              | Relative Humidity | 53%      |
| Test Voltage  | AC 120V/60Hz                                                      | Phase             | Line     |
| Test Mode     | Adapter+Idle+BT+2.4G WIFI+GPS+Camera on+Earphone                  |                   |          |
| Note          | Adapter:Salcomp(EU)+Honglin +Battery: Desay + Earphone:Lianchuang |                   |          |
| Test Engineer | Kevin Li                                                          |                   |          |


80 dBuV

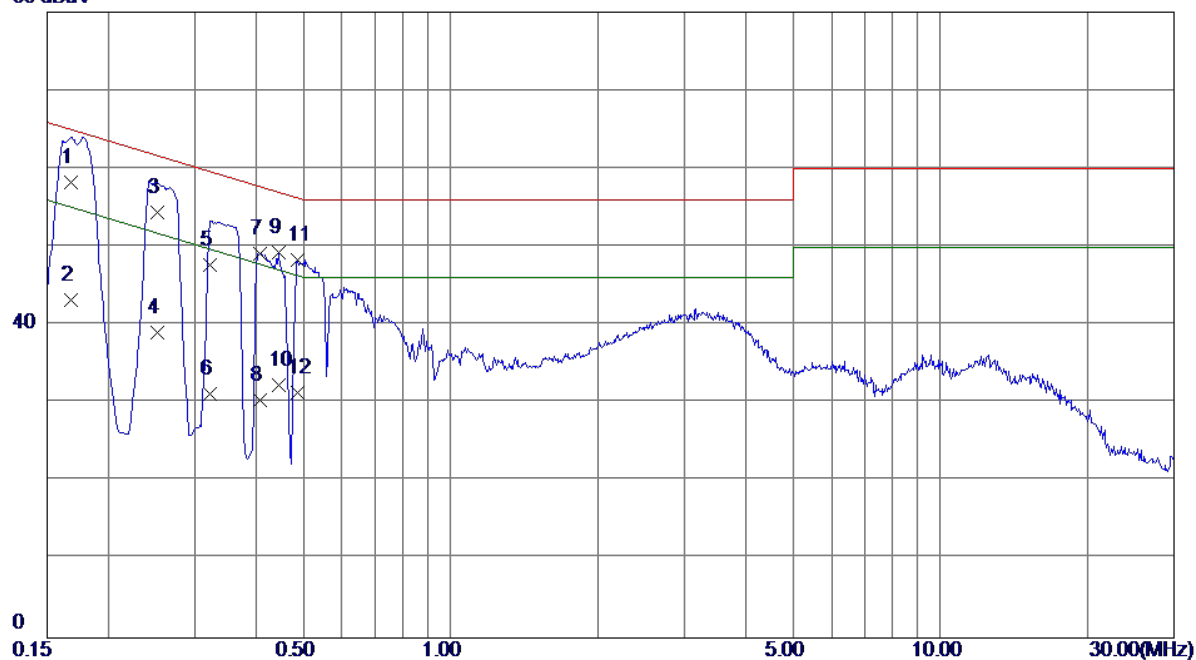

| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV | Limit<br>dBuV | Margin<br>dB | Detector |
|-----|--------------|--------------------------|-------------------------|-------------------------|---------------|--------------|----------|
| 1 * | 0.1680       | 48.60                    | 9.65                    | 58.25                   | 65.06         | -6.81        | QP       |
| 2   | 0.1680       | 33.60                    | 9.65                    | 43.25                   | 55.06         | -11.81       | AVG      |
| 3   | 0.2513       | 44.60                    | 9.79                    | 54.39                   | 61.71         | -7.32        | QP       |
| 4   | 0.2513       | 29.30                    | 9.79                    | 39.09                   | 51.71         | -12.62       | AVG      |
| 5   | 0.3232       | 37.81                    | 9.87                    | 47.68                   | 59.62         | -11.94       | QP       |
| 6   | 0.3232       | 21.31                    | 9.87                    | 31.18                   | 49.62         | -18.44       | AVG      |
| 7   | 0.4087       | 39.30                    | 9.87                    | 49.17                   | 57.67         | -8.50        | QP       |
| 8   | 0.4087       | 20.60                    | 9.87                    | 30.47                   | 47.67         | -17.20       | AVG      |
| 9   | 0.4447       | 39.40                    | 9.88                    | 49.28                   | 56.97         | -7.69        | QP       |
| 10  | 0.4447       | 22.50                    | 9.88                    | 32.38                   | 46.97         | -14.59       | AVG      |
| 11  | 0.4875       | 38.49                    | 9.90                    | 48.39                   | 56.21         | -7.82        | QP       |
| 12  | 0.4875       | 21.40                    | 9.90                    | 31.30                   | 46.21         | -14.91       | AVG      |

|               |                                                                   |                   |          |
|---------------|-------------------------------------------------------------------|-------------------|----------|
| EUT           | Smart Phone                                                       | Model Name        | M300-L29 |
| Temperature   | 25°C                                                              | Relative Humidity | 53%      |
| Test Voltage  | AC 120V/60Hz                                                      | Phase             | Neutral  |
| Test Mode     | Adapter+Idle+BT+2.4G WIFI+GPS+Camera on+Earphone                  |                   |          |
| Note          | Adapter:Salcomp(EU)+Honglin +Battery: Desay + Earphone:Lianchuang |                   |          |
| Test Engineer | Kevin Li                                                          |                   |          |


80 dBuV

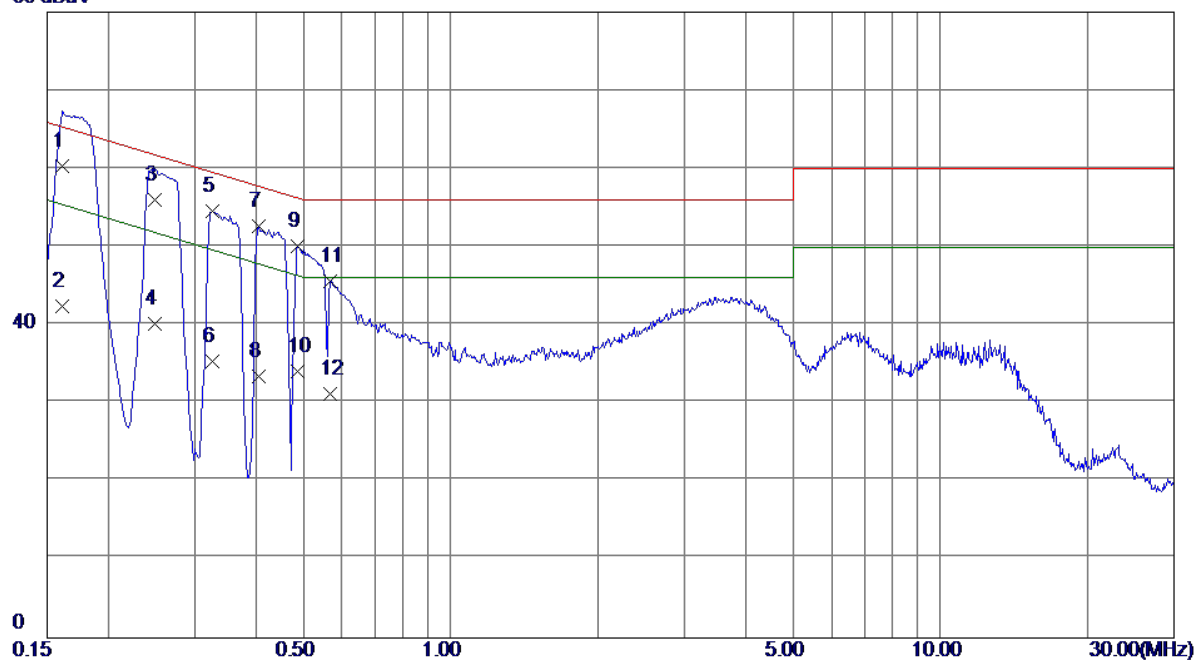

| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV | Limit<br>dBuV | Margin<br>dB | Detector |
|-----|--------------|--------------------------|-------------------------|-------------------------|---------------|--------------|----------|
| 1 * | 0.1613       | 50.80                    | 9.55                    | 60.35                   | 65.40         | -5.05        | QP       |
| 2   | 0.1613       | 32.80                    | 9.55                    | 42.35                   | 55.40         | -13.05       | AVG      |
| 3   | 0.2490       | 46.30                    | 9.69                    | 55.99                   | 61.79         | -5.80        | QP       |
| 4   | 0.2490       | 30.40                    | 9.69                    | 40.09                   | 51.79         | -11.70       | AVG      |
| 5   | 0.3255       | 44.77                    | 9.73                    | 54.50                   | 59.57         | -5.07        | QP       |
| 6   | 0.3255       | 25.60                    | 9.73                    | 35.33                   | 49.57         | -14.24       | AVG      |
| 7   | 0.4065       | 42.88                    | 9.77                    | 52.65                   | 57.72         | -5.07        | QP       |
| 8   | 0.4065       | 23.60                    | 9.77                    | 33.37                   | 47.72         | -14.35       | AVG      |
| 9   | 0.4875       | 40.22                    | 9.80                    | 50.02                   | 56.21         | -6.19        | QP       |
| 10  | 0.4875       | 24.30                    | 9.80                    | 34.10                   | 46.21         | -12.11       | AVG      |
| 11  | 0.5685       | 35.82                    | 9.83                    | 45.65                   | 56.00         | -10.35       | QP       |
| 12  | 0.5685       | 21.40                    | 9.83                    | 31.23                   | 46.00         | -14.77       | AVG      |

|               |                                                              |                   |          |
|---------------|--------------------------------------------------------------|-------------------|----------|
| EUT           | Smart Phone                                                  | Model Name        | M300-L29 |
| Temperature   | 25°C                                                         | Relative Humidity | 53%      |
| Test Voltage  | AC 120V/60Hz                                                 | Phase             | Line     |
| Test Mode     | Adapter+Idle+BT+2.4G WIFI+GPS+Camera on+Earphone             |                   |          |
| Note          | Adapter:HK(US)+Honglin +Battery: Desay + Earphone:Lianchuang |                   |          |
| Test Engineer | Kevin Li                                                     |                   |          |


80 dBuV

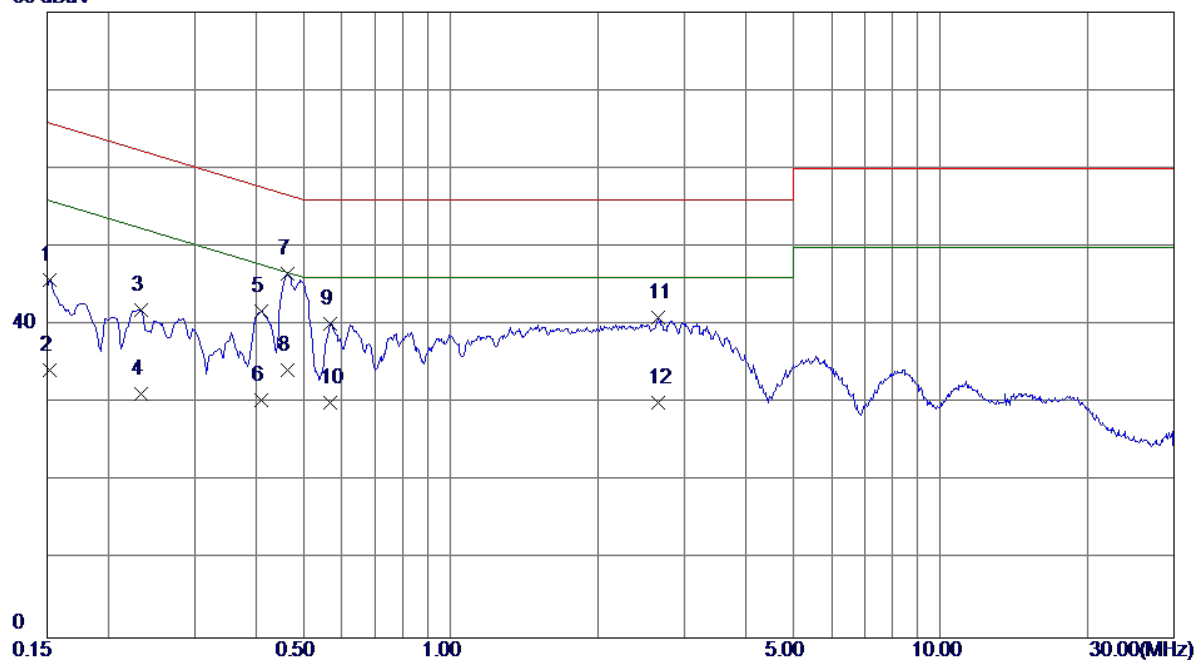

| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV | Limit<br>dBuV | Margin<br>dB | Detector |
|-----|--------------|--------------------------|-------------------------|-------------------------|---------------|--------------|----------|
| 1   | 0.1522       | 36.19                    | 9.64                    | 45.83                   | 65.88         | -20.05       | QP       |
| 2   | 0.1522       | 24.60                    | 9.64                    | 34.24                   | 55.88         | -21.64       | AVG      |
| 3   | 0.2333       | 32.13                    | 9.75                    | 41.88                   | 62.33         | -20.45       | QP       |
| 4   | 0.2333       | 21.41                    | 9.75                    | 31.16                   | 52.33         | -21.17       | AVG      |
| 5   | 0.4110       | 31.93                    | 9.87                    | 41.80                   | 57.63         | -15.83       | QP       |
| 6   | 0.4110       | 20.50                    | 9.87                    | 30.37                   | 47.63         | -17.26       | AVG      |
| 7 * | 0.4650       | 36.60                    | 9.89                    | 46.49                   | 56.60         | -10.11       | QP       |
| 8   | 0.4650       | 24.40                    | 9.89                    | 34.29                   | 46.60         | -12.31       | AVG      |
| 9   | 0.5685       | 30.13                    | 9.99                    | 40.12                   | 56.00         | -15.88       | QP       |
| 10  | 0.5685       | 20.11                    | 9.99                    | 30.10                   | 46.00         | -15.90       | AVG      |
| 11  | 2.6588       | 30.83                    | 10.07                   | 40.90                   | 56.00         | -15.10       | QP       |
| 12  | 2.6588       | 20.00                    | 10.07                   | 30.07                   | 46.00         | -15.93       | AVG      |

|               |                                                              |                   |          |
|---------------|--------------------------------------------------------------|-------------------|----------|
| EUT           | Smart Phone                                                  | Model Name        | M300-L29 |
| Temperature   | 25°C                                                         | Relative Humidity | 53%      |
| Test Voltage  | AC 120V/60Hz                                                 | Phase             | Neutral  |
| Test Mode     | Adapter+Idle+BT+2.4G WIFI+GPS+Camera on+Earphone             |                   |          |
| Note          | Adapter:HK(US)+Honglin +Battery: Desay + Earphone:Lianchuang |                   |          |
| Test Engineer | Kevin Li                                                     |                   |          |


80 dBuV

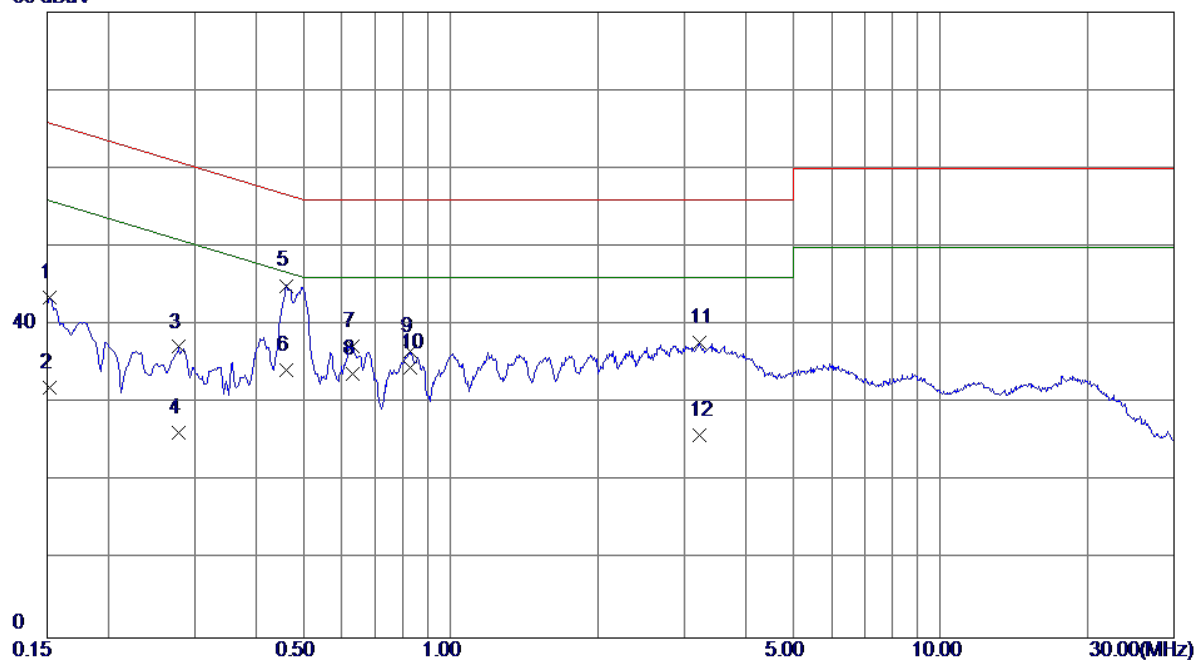

| No.  | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV | Limit<br>dBuV | Margin<br>dB | Detector |
|------|--------------|--------------------------|-------------------------|-------------------------|---------------|--------------|----------|
| 1    | 0.1522       | 33.96                    | 9.54                    | 43.50                   | 65.88         | -22.38       | QP       |
| 2    | 0.1522       | 22.50                    | 9.54                    | 32.04                   | 55.88         | -23.84       | AVG      |
| 3    | 0.2782       | 27.49                    | 9.71                    | 37.20                   | 60.87         | -23.67       | QP       |
| 4    | 0.2782       | 16.50                    | 9.71                    | 26.21                   | 50.87         | -24.66       | AVG      |
| 5    | 0.4627       | 35.25                    | 9.79                    | 45.04                   | 56.64         | -11.60       | QP       |
| 6    | 0.4627       | 24.40                    | 9.79                    | 34.19                   | 46.64         | -12.45       | AVG      |
| 7    | 0.6292       | 27.37                    | 9.84                    | 37.21                   | 56.00         | -18.79       | QP       |
| 8    | 0.6292       | 23.90                    | 9.84                    | 33.74                   | 46.00         | -12.26       | AVG      |
| 9    | 0.8272       | 26.73                    | 9.89                    | 36.62                   | 56.00         | -19.38       | QP       |
| 10 * | 0.8272       | 24.60                    | 9.89                    | 34.49                   | 46.00         | -11.51       | AVG      |
| 11   | 3.2145       | 27.65                    | 10.05                   | 37.70                   | 56.00         | -18.30       | QP       |
| 12   | 3.2145       | 15.90                    | 10.05                   | 25.95                   | 46.00         | -20.05       | AVG      |

|               |                                                              |                   |          |
|---------------|--------------------------------------------------------------|-------------------|----------|
| EUT           | Smart Phone                                                  | Model Name        | M300-L29 |
| Temperature   | 25°C                                                         | Relative Humidity | 53%      |
| Test Voltage  | AC 120V/60Hz                                                 | Phase             | Line     |
| Test Mode     | Adapter+Idle+BT+2.4G WIFI+GPS+Camera on+Earphone             |                   |          |
| Note          | Adapter:HK(EU)+Honglin +Battery: Desay + Earphone:Lianchuang |                   |          |
| Test Engineer | Kevin Li                                                     |                   |          |


80 dBuV

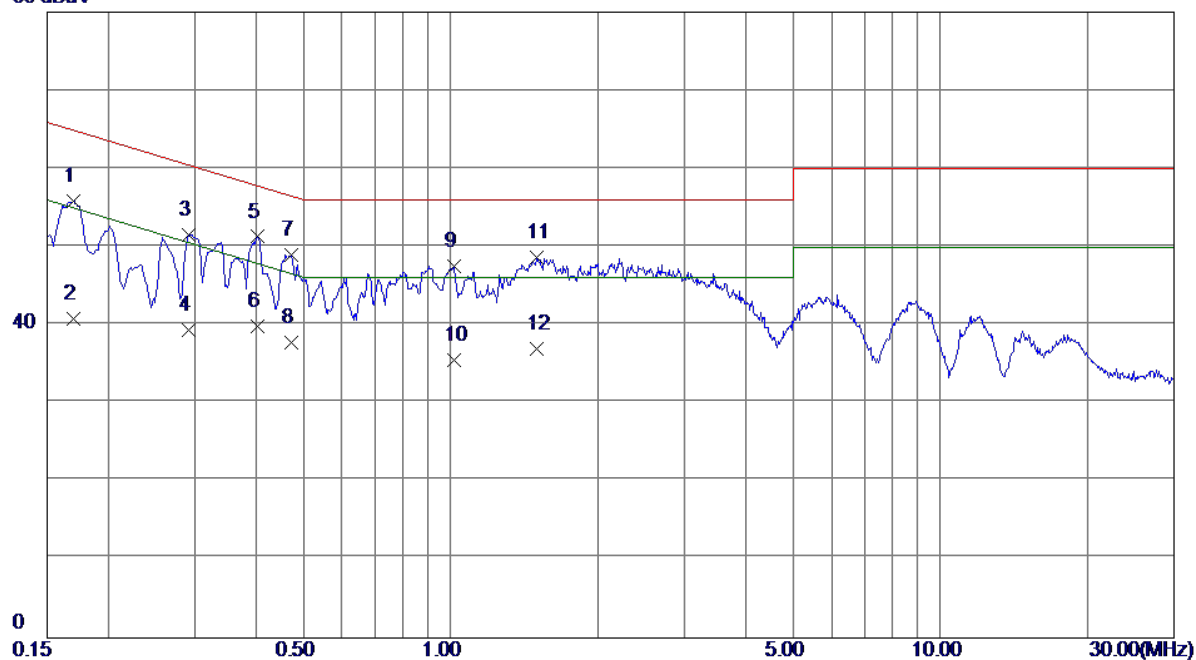

| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV | Limit<br>dBuV | Margin<br>dB | Detector |
|-----|--------------|--------------------------|-------------------------|-------------------------|---------------|--------------|----------|
| 1   | 0.1702       | 46.15                    | 9.65                    | 55.80                   | 64.95         | -9.15        | QP       |
| 2   | 0.1702       | 31.20                    | 9.65                    | 40.85                   | 54.95         | -14.10       | AVG      |
| 3   | 0.2917       | 41.69                    | 9.81                    | 51.50                   | 60.48         | -8.98        | QP       |
| 4   | 0.2917       | 29.60                    | 9.81                    | 39.41                   | 50.48         | -11.07       | AVG      |
| 5 * | 0.4042       | 41.41                    | 9.87                    | 51.28                   | 57.77         | -6.49        | QP       |
| 6   | 0.4042       | 29.90                    | 9.87                    | 39.77                   | 47.77         | -8.00        | AVG      |
| 7   | 0.4717       | 39.04                    | 9.90                    | 48.94                   | 56.48         | -7.54        | QP       |
| 8   | 0.4717       | 27.90                    | 9.90                    | 37.80                   | 46.48         | -8.68        | AVG      |
| 9   | 1.0162       | 37.34                    | 10.13                   | 47.47                   | 56.00         | -8.53        | QP       |
| 10  | 1.0162       | 25.40                    | 10.13                   | 35.53                   | 46.00         | -10.47       | AVG      |
| 11  | 1.4977       | 38.45                    | 10.15                   | 48.60                   | 56.00         | -7.40        | QP       |
| 12  | 1.4977       | 26.79                    | 10.15                   | 36.94                   | 46.00         | -9.06        | AVG      |


|               |                                                              |                   |          |
|---------------|--------------------------------------------------------------|-------------------|----------|
| EUT           | Smart Phone                                                  | Model Name        | M300-L29 |
| Temperature   | 25°C                                                         | Relative Humidity | 53%      |
| Test Voltage  | AC 120V/60Hz                                                 | Phase             | Neutral  |
| Test Mode     | Adapter+Idle+BT+2.4G WIFI+GPS+Camera on+Earphone             |                   |          |
| Note          | Adapter:HK(EU)+Honglin +Battery: Desay + Earphone:Lianchuang |                   |          |
| Test Engineer | Kevin Li                                                     |                   |          |

80 dBuV

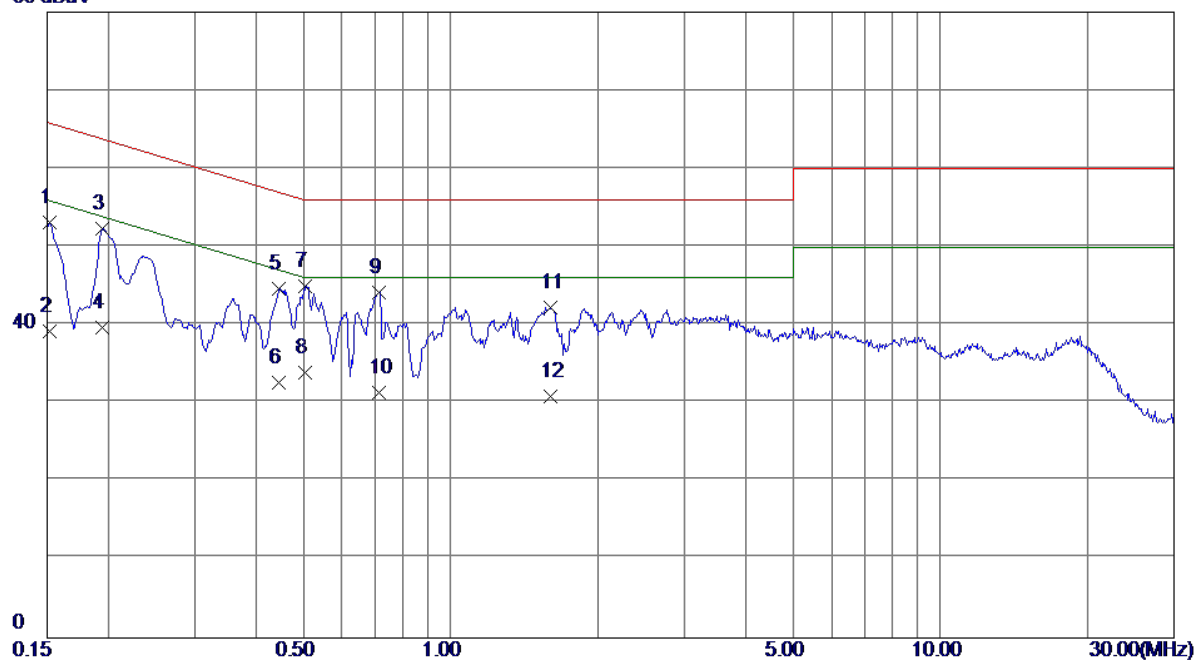

| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV | Limit<br>dBuV | Margin<br>dB | Detector |
|-----|--------------|--------------------------|-------------------------|-------------------------|---------------|--------------|----------|
| 1   | 0.1522       | 43.60                    | 9.54                    | 53.14                   | 65.88         | -12.74       | QP       |
| 2   | 0.1522       | 29.60                    | 9.54                    | 39.14                   | 55.88         | -16.74       | AVG      |
| 3   | 0.1949       | 42.71                    | 9.65                    | 52.36                   | 63.83         | -11.47       | QP       |
| 4   | 0.1949       | 30.10                    | 9.65                    | 39.75                   | 53.83         | -14.08       | AVG      |
| 5   | 0.4470       | 34.79                    | 9.79                    | 44.58                   | 56.93         | -12.35       | QP       |
| 6   | 0.4470       | 22.90                    | 9.79                    | 32.69                   | 46.93         | -14.24       | AVG      |
| 7 * | 0.5055       | 35.10                    | 9.81                    | 44.91                   | 56.00         | -11.09       | QP       |
| 8   | 0.5055       | 24.10                    | 9.81                    | 33.91                   | 46.00         | -12.09       | AVG      |
| 9   | 0.7125       | 34.34                    | 9.86                    | 44.20                   | 56.00         | -11.80       | QP       |
| 10  | 0.7125       | 21.50                    | 9.86                    | 31.36                   | 46.00         | -14.64       | AVG      |
| 11  | 1.6035       | 32.26                    | 10.05                   | 42.31                   | 56.00         | -13.69       | QP       |
| 12  | 1.6035       | 20.80                    | 10.05                   | 30.85                   | 46.00         | -15.15       | AVG      |


|               |                                                                  |                   |          |
|---------------|------------------------------------------------------------------|-------------------|----------|
| EUT           | Smart Phone                                                      | Model Name        | M300-L29 |
| Temperature   | 25°C                                                             | Relative Humidity | 53%      |
| Test Voltage  | AC 120V/60Hz                                                     | Phase             | Line     |
| Test Mode     | Adapter+Idle+BT+5G WIFI+GPS+Camera on+Earphone                   |                   |          |
| Note          | Adapter:Phitek(US)+Honglin +Battery: Desay + Earphone:Lianchuang |                   |          |
| Test Engineer | Kevin Li                                                         |                   |          |

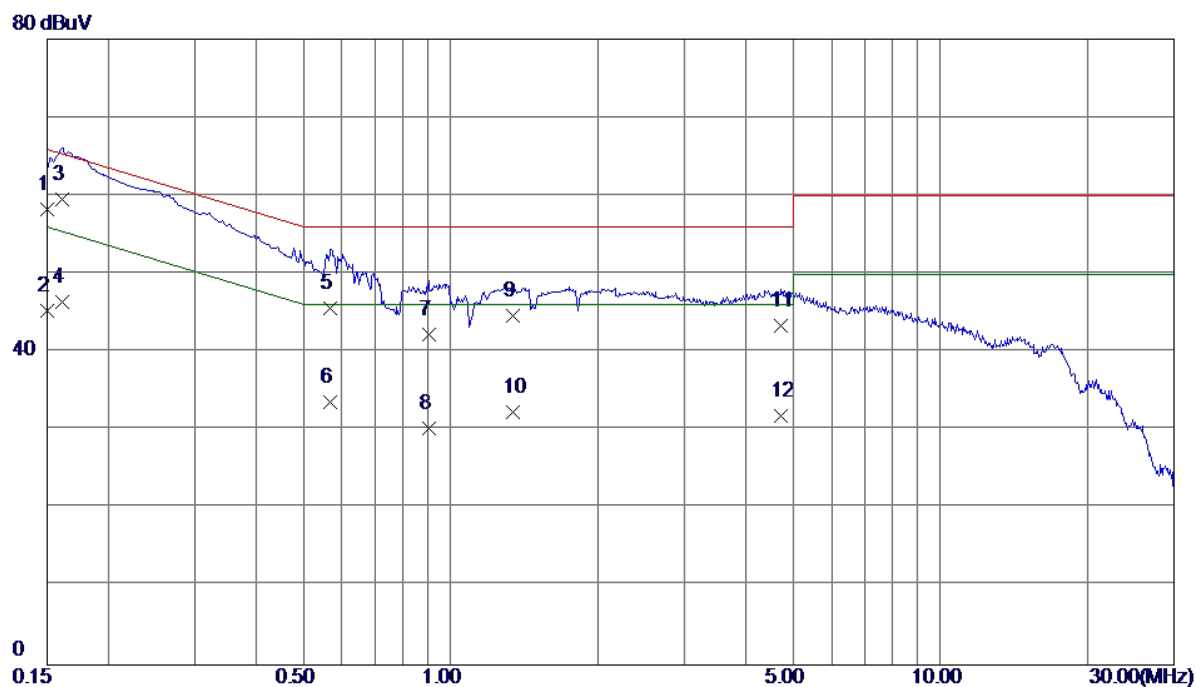

| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV | Limit<br>dBuV | Margin<br>dB | Detector |
|-----|--------------|--------------------------|-------------------------|-------------------------|---------------|--------------|----------|
| 1   | 0.1500       | 48.60                    | 9.64                    | 58.24                   | 66.00         | -7.76        | QP       |
| 2   | 0.1500       | 35.60                    | 9.64                    | 45.24                   | 56.00         | -10.76       | AVG      |
| 3 * | 0.1613       | 49.90                    | 9.65                    | 59.55                   | 65.40         | -5.85        | QP       |
| 4   | 0.1613       | 36.80                    | 9.65                    | 46.45                   | 55.40         | -8.95        | AVG      |
| 5   | 0.5685       | 35.61                    | 9.99                    | 45.60                   | 56.00         | -10.40       | QP       |
| 6   | 0.5685       | 23.61                    | 9.99                    | 33.60                   | 46.00         | -12.40       | AVG      |
| 7   | 0.9037       | 32.10                    | 10.10                   | 42.20                   | 56.00         | -13.80       | QP       |
| 8   | 0.9037       | 20.10                    | 10.10                   | 30.20                   | 46.00         | -15.80       | AVG      |
| 9   | 1.3425       | 34.50                    | 10.19                   | 44.69                   | 56.00         | -11.31       | QP       |
| 10  | 1.3425       | 22.10                    | 10.19                   | 32.29                   | 46.00         | -13.71       | AVG      |
| 11  | 4.7288       | 33.20                    | 10.10                   | 43.30                   | 56.00         | -12.70       | QP       |
| 12  | 4.7288       | 21.70                    | 10.10                   | 31.80                   | 46.00         | -14.20       | AVG      |

|               |                                                                  |                   |          |
|---------------|------------------------------------------------------------------|-------------------|----------|
| EUT           | Smart Phone                                                      | Model Name        | M300-L29 |
| Temperature   | 25°C                                                             | Relative Humidity | 53%      |
| Test Voltage  | AC 120V/60Hz                                                     | Phase             | Neutral  |
| Test Mode     | Adapter+Idle+BT+5G WIFI+GPS+Camera on+Earphone                   |                   |          |
| Note          | Adapter:Phitek(US)+Honglin +Battery: Desay + Earphone:Lianchuang |                   |          |
| Test Engineer | Kevin Li                                                         |                   |          |


80 dBuV

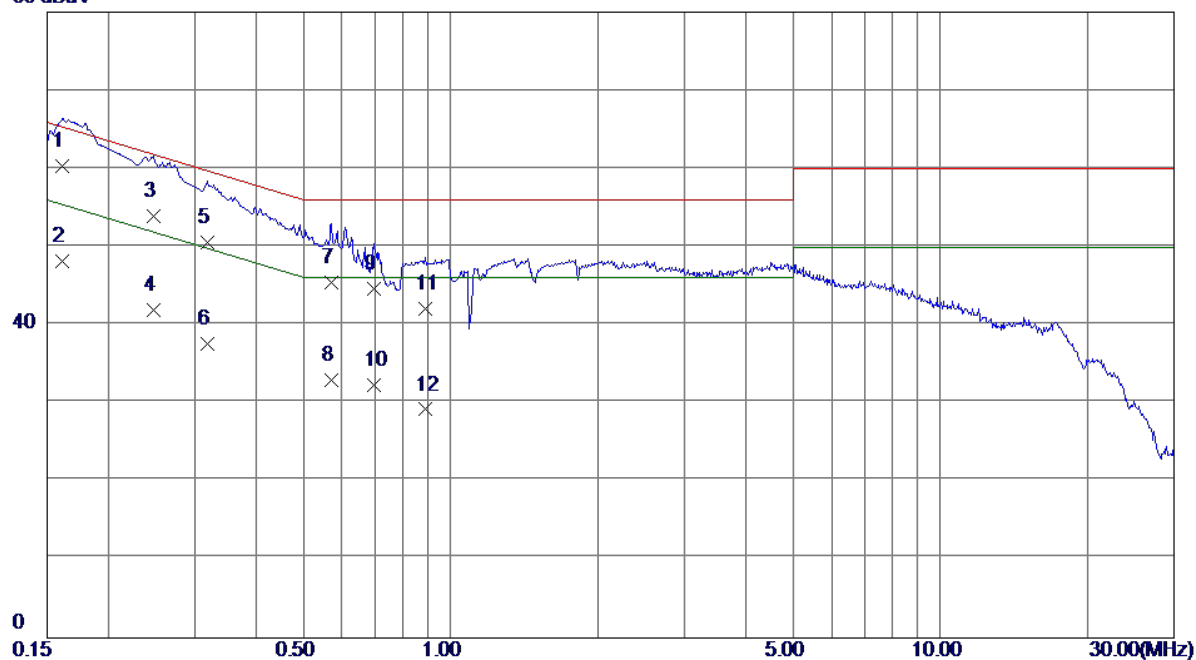

| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV | Limit<br>dBuV | Margin<br>dB | Detector |
|-----|--------------|--------------------------|-------------------------|-------------------------|---------------|--------------|----------|
| 1 * | 0.1612       | 50.70                    | 9.55                    | 60.25                   | 65.40         | -5.15        | QP       |
| 2   | 0.1612       | 38.60                    | 9.55                    | 48.15                   | 55.40         | -7.25        | AVG      |
| 3   | 0.2467       | 44.20                    | 9.69                    | 53.89                   | 61.87         | -7.98        | QP       |
| 4   | 0.2467       | 32.20                    | 9.69                    | 41.89                   | 51.87         | -9.98        | AVG      |
| 5   | 0.3187       | 40.80                    | 9.73                    | 50.53                   | 59.74         | -9.21        | QP       |
| 6   | 0.3187       | 27.90                    | 9.73                    | 37.63                   | 49.74         | -12.11       | AVG      |
| 7   | 0.5707       | 35.60                    | 9.83                    | 45.43                   | 56.00         | -10.57       | QP       |
| 8   | 0.5707       | 23.10                    | 9.83                    | 32.93                   | 46.00         | -13.07       | AVG      |
| 9   | 0.6967       | 34.80                    | 9.86                    | 44.66                   | 56.00         | -11.34       | QP       |
| 10  | 0.6967       | 22.50                    | 9.86                    | 32.36                   | 46.00         | -13.64       | AVG      |
| 11  | 0.8880       | 32.20                    | 9.90                    | 42.10                   | 56.00         | -13.90       | QP       |
| 12  | 0.8880       | 19.30                    | 9.90                    | 29.20                   | 46.00         | -16.80       | AVG      |


|               |                                            |                   |          |
|---------------|--------------------------------------------|-------------------|----------|
| EUT           | Smart Phone                                | Model Name        | M300-L29 |
| Temperature   | 25°C                                       | Relative Humidity | 53%      |
| Test Voltage  | AC 120V/60Hz                               | Phase             | Line     |
| Test Mode     | Adapter+Idle+Playing+Speaker               |                   |          |
| Note          | Adapter:Phitek(EU)+Honglin +Battery: Desay |                   |          |
| Test Engineer | Kevin Li                                   |                   |          |

80 dBuV

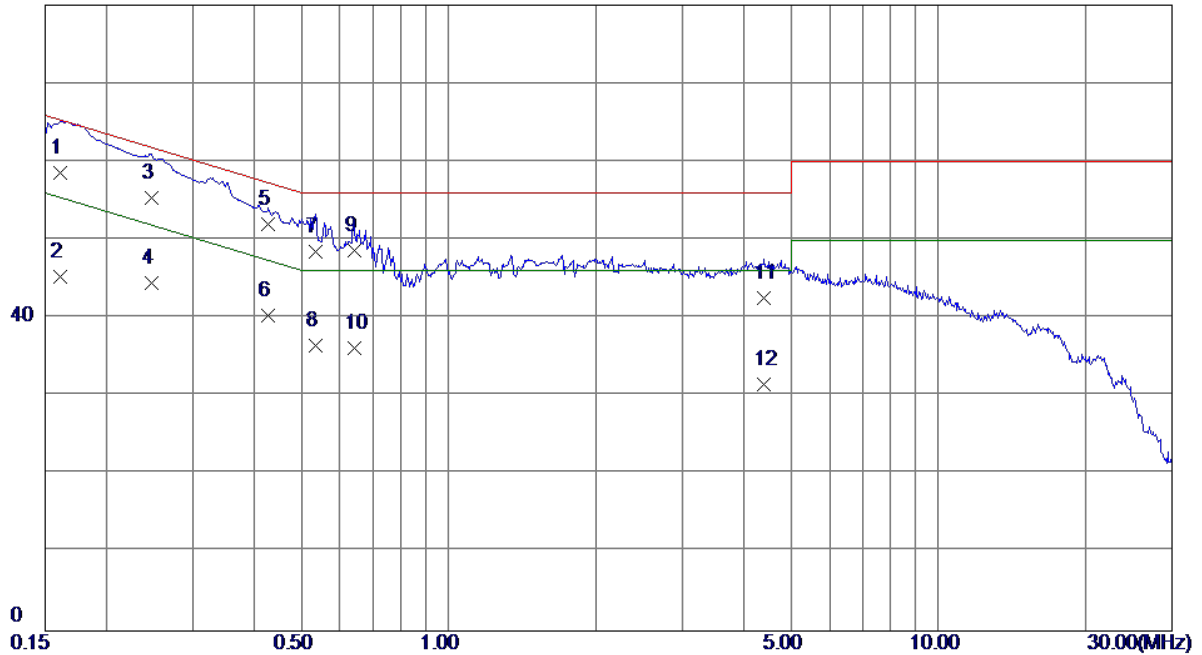

| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV | Limit<br>dBuV | Margin<br>dB | Detector |
|-----|--------------|--------------------------|-------------------------|-------------------------|---------------|--------------|----------|
| 1   | 0.1612       | 48.90                    | 9.65                    | 58.55                   | 65.40         | -6.85        | QP       |
| 2   | 0.1612       | 35.60                    | 9.65                    | 45.25                   | 55.40         | -10.15       | AVG      |
| 3   | 0.2467       | 45.59                    | 9.79                    | 55.38                   | 61.87         | -6.49        | QP       |
| 4   | 0.2467       | 34.69                    | 9.79                    | 44.48                   | 51.87         | -7.39        | AVG      |
| 5 * | 0.4290       | 42.10                    | 9.88                    | 51.98                   | 57.27         | -5.29        | QP       |
| 6   | 0.4290       | 30.40                    | 9.88                    | 40.28                   | 47.27         | -6.99        | AVG      |
| 7   | 0.5347       | 38.60                    | 9.95                    | 48.55                   | 56.00         | -7.45        | QP       |
| 8   | 0.5347       | 26.60                    | 9.95                    | 36.55                   | 46.00         | -9.45        | AVG      |
| 9   | 0.6404       | 38.60                    | 10.04                   | 48.64                   | 56.00         | -7.36        | QP       |
| 10  | 0.6404       | 26.10                    | 10.04                   | 36.14                   | 46.00         | -9.86        | AVG      |
| 11  | 4.4092       | 32.50                    | 10.08                   | 42.58                   | 56.00         | -13.42       | QP       |
| 12  | 4.4092       | 21.40                    | 10.08                   | 31.48                   | 46.00         | -14.52       | AVG      |


|               |                                            |                   |          |
|---------------|--------------------------------------------|-------------------|----------|
| EUT           | Smart Phone                                | Model Name        | M300-L29 |
| Temperature   | 25°C                                       | Relative Humidity | 53%      |
| Test Voltage  | AC 120V/60Hz                               | Phase             | Neutral  |
| Test Mode     | Adapter+Idle+Playing+Speaker               |                   |          |
| Note          | Adapter:Phitek(EU)+Honglin +Battery: Desay |                   |          |
| Test Engineer | Kevin Li                                   |                   |          |

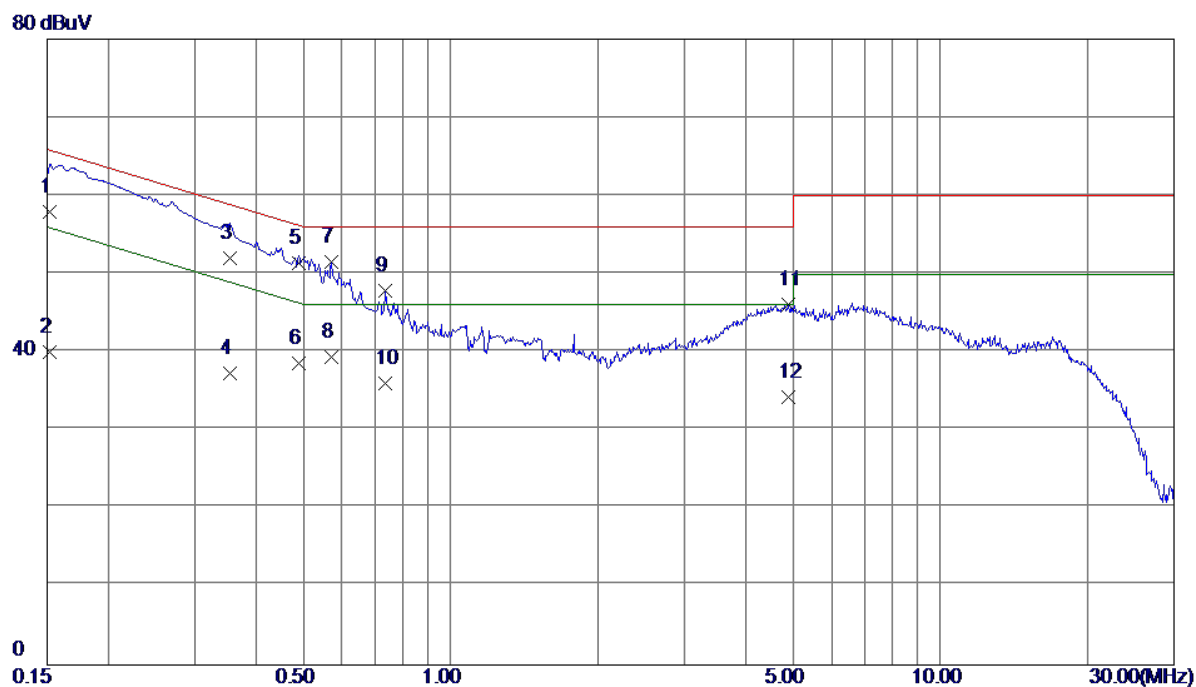

| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV | Limit<br>dBuV | Margin<br>dB | Detector |
|-----|--------------|--------------------------|-------------------------|-------------------------|---------------|--------------|----------|
| 1   | 0.1522       | 48.30                    | 9.54                    | 57.84                   | 65.88         | -8.04        | QP       |
| 2   | 0.1522       | 30.50                    | 9.54                    | 40.04                   | 55.88         | -15.84       | AVG      |
| 3   | 0.3547       | 42.30                    | 9.74                    | 52.04                   | 58.85         | -6.81        | QP       |
| 4   | 0.3547       | 27.60                    | 9.74                    | 37.34                   | 48.85         | -11.51       | AVG      |
| 5   | 0.4897       | 41.61                    | 9.80                    | 51.41                   | 56.17         | -4.76        | QP       |
| 6   | 0.4897       | 28.81                    | 9.80                    | 38.61                   | 46.17         | -7.56        | AVG      |
| 7 * | 0.5707       | 41.73                    | 9.83                    | 51.56                   | 56.00         | -4.44        | QP       |
| 8   | 0.5707       | 29.60                    | 9.83                    | 39.43                   | 46.00         | -6.57        | AVG      |
| 9   | 0.7350       | 38.02                    | 9.86                    | 47.88                   | 56.00         | -8.12        | QP       |
| 10  | 0.7350       | 26.20                    | 9.86                    | 36.06                   | 46.00         | -9.94        | AVG      |
| 11  | 4.8818       | 35.72                    | 10.29                   | 46.01                   | 56.00         | -9.99        | QP       |
| 12  | 4.8818       | 24.00                    | 10.29                   | 34.29                   | 46.00         | -11.71       | AVG      |

|               |                                                                  |                   |          |
|---------------|------------------------------------------------------------------|-------------------|----------|
| EUT           | Smart Phone                                                      | Model Name        | M300-L29 |
| Temperature   | 25°C                                                             | Relative Humidity | 53%      |
| Test Voltage  | AC 120V/60Hz                                                     | Phase             | Line     |
| Test Mode     | Adapter+Traffic (GSM)+ Earphone                                  |                   |          |
| Note          | Adapter:Phitek(EU)+Honglin +Battery: Desay + Earphone:Lianchuang |                   |          |
| Test Engineer | Kevin Li                                                         |                   |          |


80 dBuV

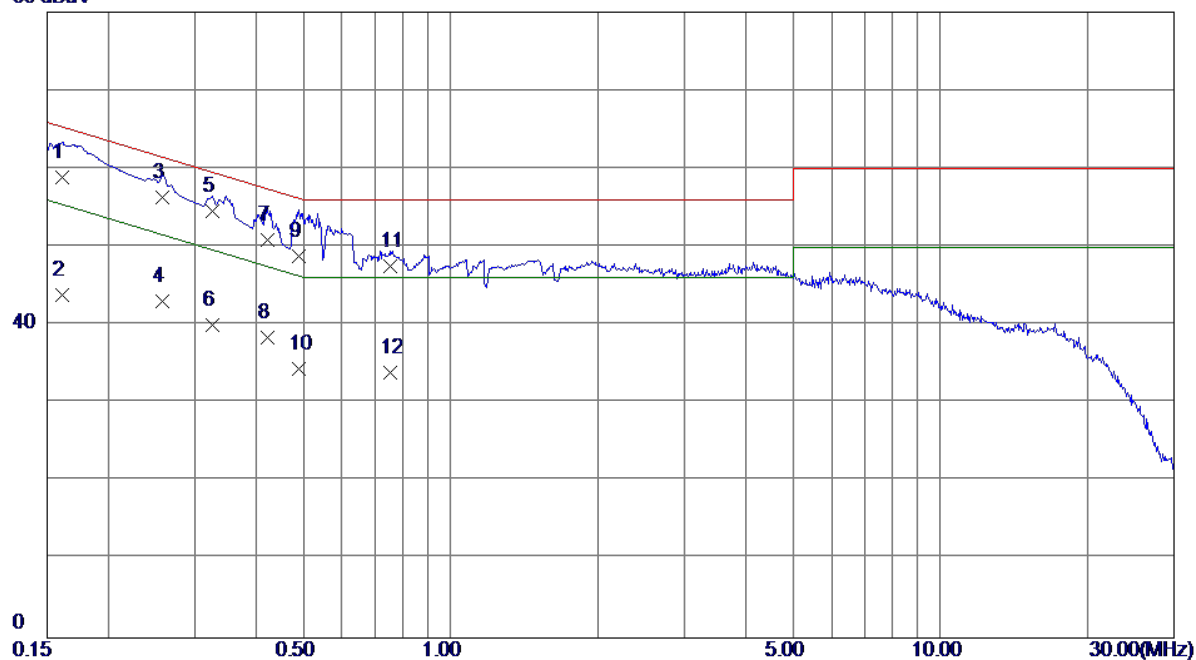

| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV | Limit<br>dBuV | Margin<br>dB | Detector |
|-----|--------------|--------------------------|-------------------------|-------------------------|---------------|--------------|----------|
| 1   | 0.1613       | 49.30                    | 9.65                    | 58.95                   | 65.40         | -6.45        | QP       |
| 2   | 0.1613       | 34.20                    | 9.65                    | 43.85                   | 55.40         | -11.55       | AVG      |
| 3   | 0.2580       | 46.50                    | 9.80                    | 56.30                   | 61.50         | -5.20        | QP       |
| 4   | 0.2580       | 33.20                    | 9.80                    | 43.00                   | 51.50         | -8.50        | AVG      |
| 5 * | 0.3255       | 44.70                    | 9.88                    | 54.58                   | 59.57         | -4.99        | QP       |
| 6   | 0.3255       | 30.10                    | 9.88                    | 39.98                   | 49.57         | -9.59        | AVG      |
| 7   | 0.4222       | 41.00                    | 9.87                    | 50.87                   | 57.40         | -6.53        | QP       |
| 8   | 0.4222       | 28.60                    | 9.87                    | 38.47                   | 47.40         | -8.93        | AVG      |
| 9   | 0.4897       | 38.91                    | 9.90                    | 48.81                   | 56.17         | -7.36        | QP       |
| 10  | 0.4897       | 24.51                    | 9.90                    | 34.41                   | 46.17         | -11.76       | AVG      |
| 11  | 0.7507       | 37.40                    | 10.07                   | 47.47                   | 56.00         | -8.53        | QP       |
| 12  | 0.7507       | 23.90                    | 10.07                   | 33.97                   | 46.00         | -12.03       | AVG      |

|               |                                                                  |                   |          |
|---------------|------------------------------------------------------------------|-------------------|----------|
| EUT           | Smart Phone                                                      | Model Name        | M300-L29 |
| Temperature   | 25°C                                                             | Relative Humidity | 53%      |
| Test Voltage  | AC 120V/60Hz                                                     | Phase             | Neutral  |
| Test Mode     | Adapter+Traffic (GSM)+ Earphone                                  |                   |          |
| Note          | Adapter:Phitek(EU)+Honglin +Battery: Desay + Earphone:Lianchuang |                   |          |
| Test Engineer | Kevin Li                                                         |                   |          |


80 dBuV

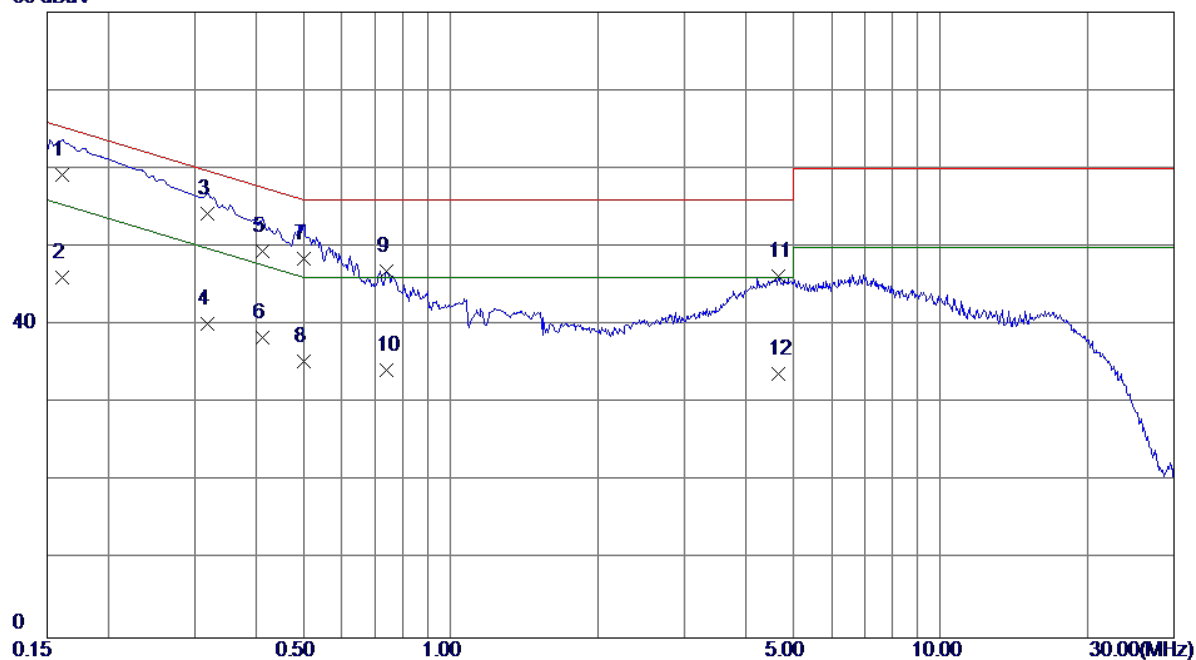

| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV | Limit<br>dBuV | Margin<br>dB | Detector |
|-----|--------------|--------------------------|-------------------------|-------------------------|---------------|--------------|----------|
| 1   | 0.1613       | 49.60                    | 9.55                    | 59.15                   | 65.40         | -6.25        | QP       |
| 2   | 0.1613       | 36.50                    | 9.55                    | 46.05                   | 55.40         | -9.35        | AVG      |
| 3 * | 0.3187       | 44.50                    | 9.73                    | 54.23                   | 59.74         | -5.51        | QP       |
| 4   | 0.3187       | 30.50                    | 9.73                    | 40.23                   | 49.74         | -9.51        | AVG      |
| 5   | 0.4132       | 39.60                    | 9.77                    | 49.37                   | 57.58         | -8.21        | QP       |
| 6   | 0.4132       | 28.60                    | 9.77                    | 38.37                   | 47.58         | -9.21        | AVG      |
| 7   | 0.5010       | 38.60                    | 9.81                    | 48.41                   | 56.00         | -7.59        | QP       |
| 8   | 0.5010       | 25.60                    | 9.81                    | 35.41                   | 46.00         | -10.59       | AVG      |
| 9   | 0.7395       | 37.06                    | 9.87                    | 46.93                   | 56.00         | -9.07        | QP       |
| 10  | 0.7395       | 24.30                    | 9.87                    | 34.17                   | 46.00         | -11.83       | AVG      |
| 11  | 4.6815       | 36.03                    | 10.26                   | 46.29                   | 56.00         | -9.71        | QP       |
| 12  | 4.6815       | 23.51                    | 10.26                   | 33.77                   | 46.00         | -12.23       | AVG      |

|               |                                            |                   |          |
|---------------|--------------------------------------------|-------------------|----------|
| EUT           | Smart Phone                                | Model Name        | M300-L29 |
| Temperature   | 25°C                                       | Relative Humidity | 53%      |
| Test Voltage  | AC 120V/60Hz                               | Phase             | Line     |
| Test Mode     | Adapter+Traffic (WCDMA)                    |                   |          |
| Note          | Adapter:Phitek(EU)+Honglin +Battery: Desay |                   |          |
| Test Engineer | Kevin Li                                   |                   |          |


80 dBuV

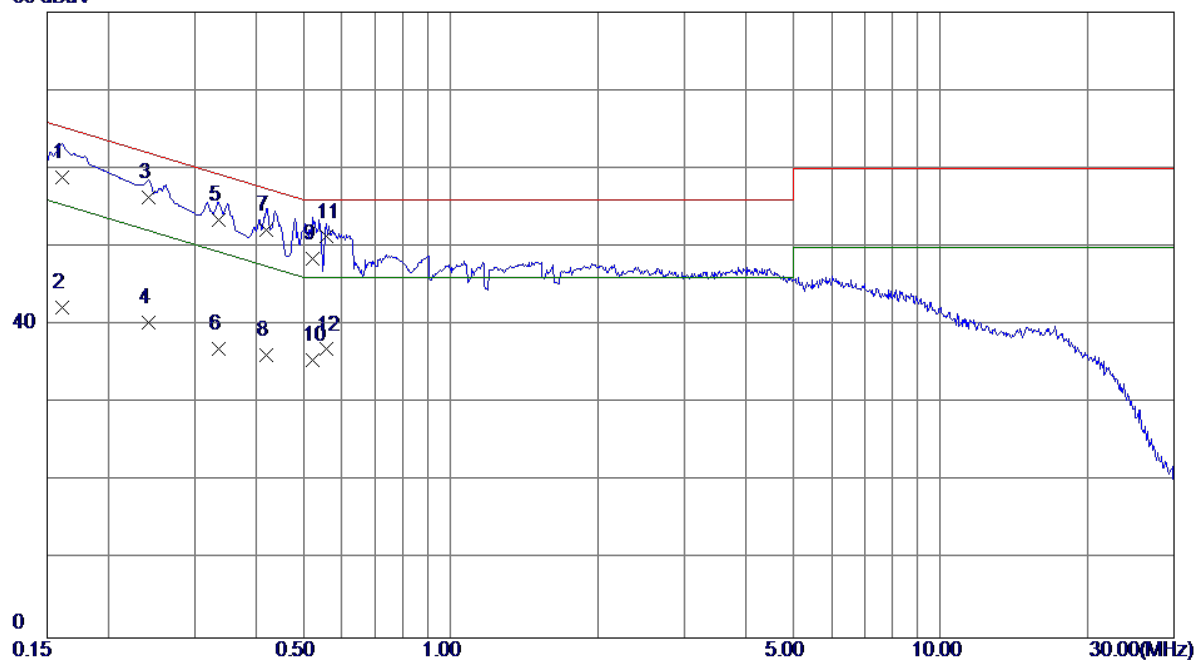

| No.  | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV | Limit<br>dBuV | Margin<br>dB | Detector |
|------|--------------|--------------------------|-------------------------|-------------------------|---------------|--------------|----------|
| 1    | 0.1613       | 49.30                    | 9.65                    | 58.95                   | 65.40         | -6.45        | QP       |
| 2    | 0.1613       | 32.60                    | 9.65                    | 42.25                   | 55.40         | -13.15       | AVG      |
| 3    | 0.2423       | 46.50                    | 9.77                    | 56.27                   | 62.02         | -5.75        | QP       |
| 4    | 0.2423       | 30.50                    | 9.77                    | 40.27                   | 52.02         | -11.75       | AVG      |
| 5    | 0.3367       | 43.59                    | 9.91                    | 53.50                   | 59.28         | -5.78        | QP       |
| 6    | 0.3367       | 27.09                    | 9.91                    | 37.00                   | 49.28         | -12.28       | AVG      |
| 7    | 0.4200       | 42.30                    | 9.87                    | 52.17                   | 57.45         | -5.28        | QP       |
| 8    | 0.4200       | 26.30                    | 9.87                    | 36.17                   | 47.45         | -11.28       | AVG      |
| 9    | 0.5235       | 38.60                    | 9.94                    | 48.54                   | 56.00         | -7.46        | QP       |
| 10   | 0.5235       | 25.60                    | 9.94                    | 35.54                   | 46.00         | -10.46       | AVG      |
| 11 * | 0.5571       | 41.30                    | 9.98                    | 51.28                   | 56.00         | -4.72        | QP       |
| 12   | 0.5571       | 26.90                    | 9.98                    | 36.88                   | 46.00         | -9.12        | AVG      |

|               |                                            |                   |          |
|---------------|--------------------------------------------|-------------------|----------|
| EUT           | Smart Phone                                | Model Name        | M300-L29 |
| Temperature   | 25°C                                       | Relative Humidity | 53%      |
| Test Voltage  | AC 120V/60Hz                               | Phase             | Neutral  |
| Test Mode     | Adapter+Traffic (WCDMA)                    |                   |          |
| Note          | Adapter:Phitek(EU)+Honglin +Battery: Desay |                   |          |
| Test Engineer | Kevin Li                                   |                   |          |


80 dBuV

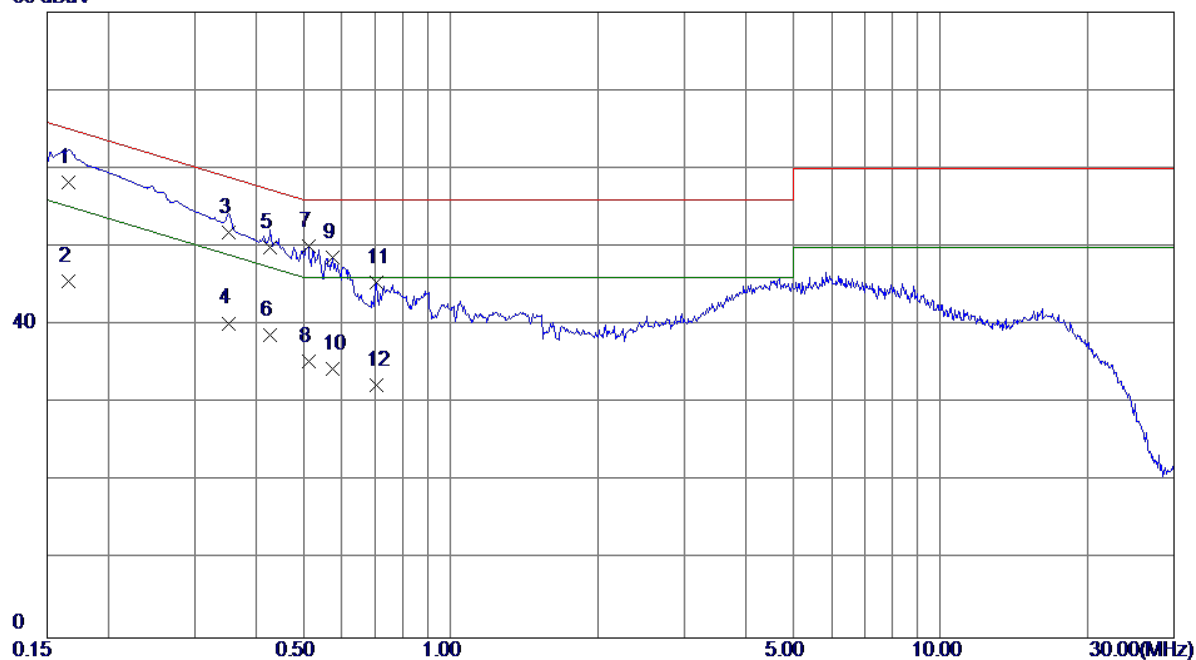

| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV | Limit<br>dBuV | Margin<br>dB | Detector |
|-----|--------------|--------------------------|-------------------------|-------------------------|---------------|--------------|----------|
| 1   | 0.1658       | 48.70                    | 9.55                    | 58.25                   | 65.17         | -6.92        | QP       |
| 2   | 0.1658       | 36.00                    | 9.55                    | 45.55                   | 55.17         | -9.62        | AVG      |
| 3   | 0.3525       | 42.10                    | 9.74                    | 51.84                   | 58.90         | -7.06        | QP       |
| 4   | 0.3525       | 30.50                    | 9.74                    | 40.24                   | 48.90         | -8.66        | AVG      |
| 5   | 0.4290       | 40.20                    | 9.78                    | 49.98                   | 57.27         | -7.29        | QP       |
| 6   | 0.4290       | 29.00                    | 9.78                    | 38.78                   | 47.27         | -8.49        | AVG      |
| 7 * | 0.5122       | 40.20                    | 9.81                    | 50.01                   | 56.00         | -5.99        | QP       |
| 8   | 0.5122       | 25.60                    | 9.81                    | 35.41                   | 46.00         | -10.59       | AVG      |
| 9   | 0.5752       | 38.86                    | 9.83                    | 48.69                   | 56.00         | -7.31        | QP       |
| 10  | 0.5752       | 24.60                    | 9.83                    | 34.43                   | 46.00         | -11.57       | AVG      |
| 11  | 0.7056       | 35.55                    | 9.86                    | 45.41                   | 56.00         | -10.59       | QP       |
| 12  | 0.7056       | 22.50                    | 9.86                    | 32.36                   | 46.00         | -13.64       | AVG      |

|               |                                            |                   |          |
|---------------|--------------------------------------------|-------------------|----------|
| EUT           | Smart Phone                                | Model Name        | M300-L29 |
| Temperature   | 25°C                                       | Relative Humidity | 53%      |
| Test Voltage  | AC 120V/60Hz                               | Phase             | Line     |
| Test Mode     | Adapter+Traffic (LTE)                      |                   |          |
| Note          | Adapter:Phitek(EU)+Honglin +Battery: Desay |                   |          |
| Test Engineer | Kevin Li                                   |                   |          |


80 dBuV

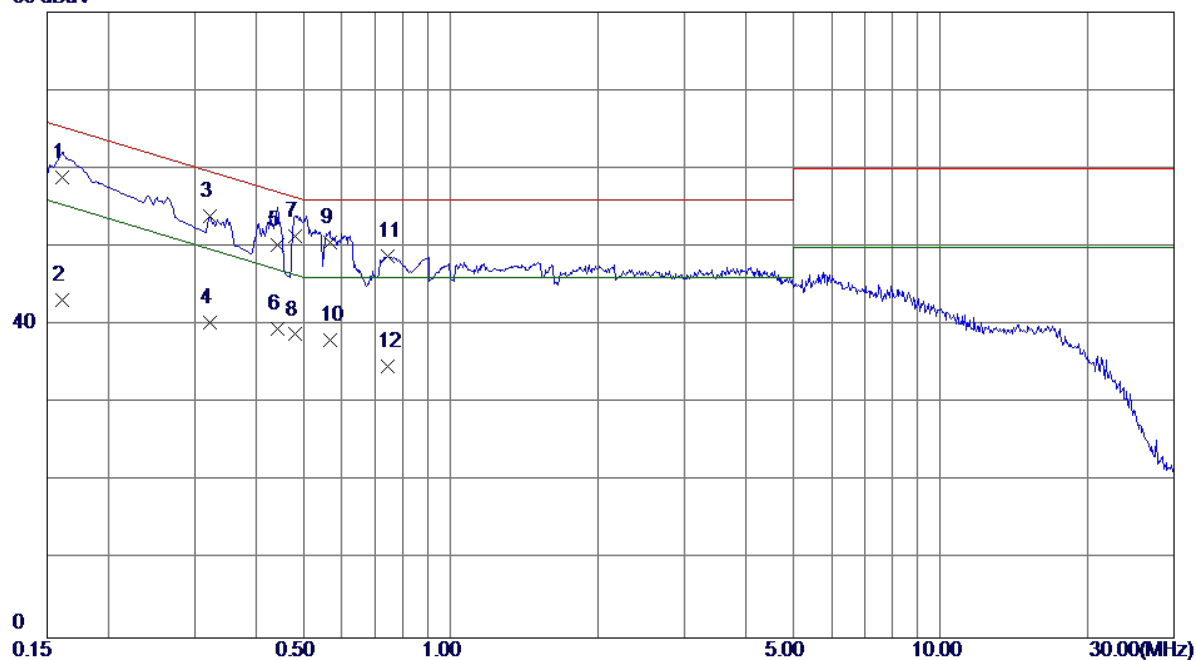

| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV | Limit<br>dBuV | Margin<br>dB | Detector |
|-----|--------------|--------------------------|-------------------------|-------------------------|---------------|--------------|----------|
| 1   | 0.1613       | 49.30                    | 9.65                    | 58.95                   | 65.40         | -6.45        | QP       |
| 2   | 0.1613       | 33.60                    | 9.65                    | 43.25                   | 55.40         | -12.15       | AVG      |
| 3   | 0.3232       | 44.06                    | 9.87                    | 53.93                   | 59.62         | -5.69        | QP       |
| 4   | 0.3232       | 30.51                    | 9.87                    | 40.38                   | 49.62         | -9.24        | AVG      |
| 5   | 0.4425       | 40.30                    | 9.88                    | 50.18                   | 57.01         | -6.83        | QP       |
| 6   | 0.4425       | 29.60                    | 9.88                    | 39.48                   | 47.01         | -7.53        | AVG      |
| 7 * | 0.4807       | 41.50                    | 9.90                    | 51.40                   | 56.33         | -4.93        | QP       |
| 8   | 0.4807       | 28.90                    | 9.90                    | 38.80                   | 46.33         | -7.53        | AVG      |
| 9   | 0.5662       | 40.61                    | 9.99                    | 50.60                   | 56.00         | -5.40        | QP       |
| 10  | 0.5662       | 28.11                    | 9.99                    | 38.10                   | 46.00         | -7.90        | AVG      |
| 11  | 0.7440       | 38.66                    | 10.07                   | 48.73                   | 56.00         | -7.27        | QP       |
| 12  | 0.7440       | 24.60                    | 10.07                   | 34.67                   | 46.00         | -11.33       | AVG      |

|               |                                            |                   |          |
|---------------|--------------------------------------------|-------------------|----------|
| EUT           | Smart Phone                                | Model Name        | M300-L29 |
| Temperature   | 25°C                                       | Relative Humidity | 53%      |
| Test Voltage  | AC 120V/60Hz                               | Phase             | Neutral  |
| Test Mode     | Adapter+Traffic (LTE)                      |                   |          |
| Note          | Adapter:Phitek(EU)+Honglin +Battery: Desay |                   |          |
| Test Engineer | Kevin Li                                   |                   |          |

80 dBuV

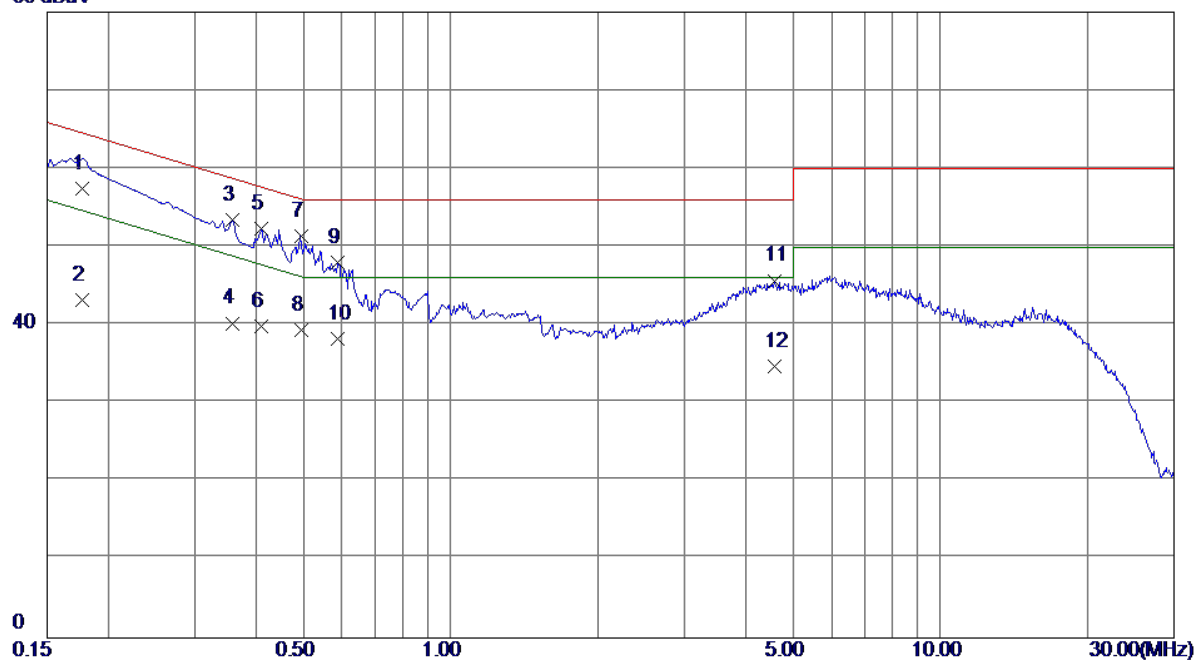

| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV | Limit<br>dBuV | Margin<br>dB | Detector |
|-----|--------------|--------------------------|-------------------------|-------------------------|---------------|--------------|----------|
| 1   | 0.1770       | 47.90                    | 9.58                    | 57.48                   | 64.63         | -7.15        | QP       |
| 2   | 0.1770       | 33.60                    | 9.58                    | 43.18                   | 54.63         | -11.45       | AVG      |
| 3   | 0.3592       | 43.76                    | 9.74                    | 53.50                   | 58.75         | -5.25        | QP       |
| 4   | 0.3592       | 30.50                    | 9.74                    | 40.24                   | 48.75         | -8.51        | AVG      |
| 5   | 0.4110       | 42.49                    | 9.77                    | 52.26                   | 57.63         | -5.37        | QP       |
| 6   | 0.4110       | 30.10                    | 9.77                    | 39.87                   | 47.63         | -7.76        | AVG      |
| 7 * | 0.4942       | 41.48                    | 9.81                    | 51.29                   | 56.10         | -4.81        | QP       |
| 8   | 0.4942       | 29.60                    | 9.81                    | 39.41                   | 46.10         | -6.69        | AVG      |
| 9   | 0.5887       | 38.18                    | 9.83                    | 48.01                   | 56.00         | -7.99        | QP       |
| 10  | 0.5887       | 28.40                    | 9.83                    | 38.23                   | 46.00         | -7.77        | AVG      |
| 11  | 4.5960       | 35.43                    | 10.25                   | 45.68                   | 56.00         | -10.32       | QP       |
| 12  | 4.5960       | 24.50                    | 10.25                   | 34.75                   | 46.00         | -11.25       | AVG      |

## 4.2 RADIATED EMISSION MEASUREMENT

### 4.2.1 LIMITS OF RADIATED EMISSION MEASUREMENT

**Below 1 GHz**

**Measurement Method and Applied Limits:**

**ANSI C63.4:**

| Frequency (MHz) | Class A (at 10m)         |                            | Class B (at 3m)          |                            |
|-----------------|--------------------------|----------------------------|--------------------------|----------------------------|
|                 | (uV/m)<br>Field strength | (dBuV/m)<br>Field strength | (uV/m)<br>Field strength | (dBuV/m)<br>Field strength |
| 30 - 88         | 90                       | 39                         | 100                      | 40                         |
| 88 - 216        | 150                      | 43.5                       | 150                      | 43.5                       |
| 216 - 960       | 210                      | 46.4                       | 200                      | 46                         |
| Above 960       | 300                      | 49.5                       | 500                      | 54                         |

**Above 1 GHz**

**Measurement Method and Applied Limits:**

**ANSI C63.4:**

| Frequency (MHz) | Class A          |         |                   |         | Class B          |         |
|-----------------|------------------|---------|-------------------|---------|------------------|---------|
|                 | (dBuV/m) (at 3m) |         | (dBuV/m) (at 10m) |         | (dBuV/m) (at 3m) |         |
|                 | Peak             | Average | Peak              | Average | Peak             | Average |
| Above 1000      | 80               | 60      | 69.5              | 49.5    | 74               | 54      |

### FREQUENCY RANGE OF RADIATED MEASUREMENT (FOR UNINTENTIONAL RADIATORS)

| Highest frequency generated or Upper frequency of measurement used in the device or on which the device operates or tunes (MHz) | Range (MHz)                                                                     |
|---------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------|
| Below 1.705                                                                                                                     | 30                                                                              |
| 1.705 - 108                                                                                                                     | 1000                                                                            |
| 108 - 500                                                                                                                       | 2000                                                                            |
| 500 - 1000                                                                                                                      | 5000                                                                            |
| Above 1000                                                                                                                      | 5 <sup>th</sup> harmonic of the highest frequency or 40 GHz, whichever is lower |

**NOTE:**

- (1) The limit for radiated test was performed according to as following:  
FCC Part 15, Subpart B
- (2) The tighter limit applies at the band edges.
- (3) Emission level (dBuV/m) = 20log Emission level (uV/m).  
3m Emission level = 10m Emission level + 20log(10m/3m).
- (4) The test result calculated as following:  
Measurement Value = Reading Level + Correct Factor  
Correct Factor = Antenna Factor + Cable Loss - Amplifier Gain(if use)  
Margin Level = Measurement Value - Limit Value

#### 4.2.2 MEASUREMENT INSTRUMENTS LIST

| Item | Kind of Equipment    | Manufacturer | Type No.                    | Serial No.  | Calibrated until |
|------|----------------------|--------------|-----------------------------|-------------|------------------|
| 1    | Antenna              | Schwarbeck   | VULB9160                    | 9160-3232   | Mar. 26, 2018    |
| 2    | Amplifier            | HP           | 8447D                       | 2944A09673  | Oct. 20, 2017    |
| 3    | Receiver             | Agilent      | N9038A                      | MY52130039  | Sep. 04, 2017    |
| 4    | Cable                | emci         | LMR-400(30MHz-1GHz)(8m+5m)  | N/A         | Jun. 26, 2018    |
| 5    | Controller           | CT           | SC100                       | N/A         | N/A              |
| 6    | Controller           | MF           | MF-7802                     | MF780208416 | N/A              |
| 7    | Measurement Software | Farad        | EZ-EMC<br>Ver.NB-03A1-01    | N/A         | N/A              |
| 8    | Amplifier            | Agilent      | 8449B                       | 3008A02274  | Feb. 22, 2018    |
| 9    | Receiver             | Agilent      | N9038A                      | MY52130039  | Sep. 04, 2017    |
| 10   | Antenna              | EM           | EM-6876-1                   | 230         | Jul. 08, 2017    |
| 11   | Controller           | CT           | SC100                       | N/A         | N/A              |
| 12   | Controller           | MF           | MF-7802                     | MF780208416 | N/A              |
| 13   | Cable                | emci         | EMC104-SM-SM-120<br>00(12m) | N/A         | Jul. 06, 2017    |
| 14   | Measurement Software | Farad        | EZ-EMC<br>Ver.NB-03A1-01    | N/A         | N/A              |

Remark: "N/A" denotes no model name, serial no. or calibration specified.  
All calibration period of equipment list is one year.

#### **4.2.3 TEST PROCEDURE**


- a. The measuring distance of 3 m shall be used for measurements. The EUT was placed on the top of a rotating table 0.8 meter above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.(below 1GHz)
- b. The measuring distance of 3 m shall be used for measurements. The EUT was placed on the top of a rotating table 0.8 meter above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.(above 1GHz)
- c. The height of the equipment or of the substitution antenna shall be 0.8 m, the height of the test antenna shall vary between 1 m to 4 m. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights find the maximum reading (used Bore sight function).
- e. The receiver system was set to peak and average detect function and specified bandwidth with maximum hold mode when the test frequency is above 1GHz.
- f. The initial step in collecting radiated emission data is a receiver peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured.
- g. All readings are Peak unless otherwise stated QP in column of Note. Peak denotes that the Peak reading compliance with the QP Limits and then QP Mode measurement didn't perform. (below 1GHz)
- h. All readings are Peak Mode value unless otherwise stated AVG in column of Note. If the Peak Mode Measured value compliance with the Peak Limits and lower than AVG Limits, the EUT shall be deemed to meet both Peak & AVG Limits and then only Peak Mode was measured, but AVG Mode didn't perform. (above 1GHz)
- i. For the actual test configuration, please refer to the related Item - Block Diagram of system tested (please refer to 3.3).

#### **4.2.4 DEVIATION FROM TEST STANDARD**


No deviation

#### 4.2.5 TEST SETUP

##### (A) Radiated Emission Test Set-Up Frequency Below 1 GHz

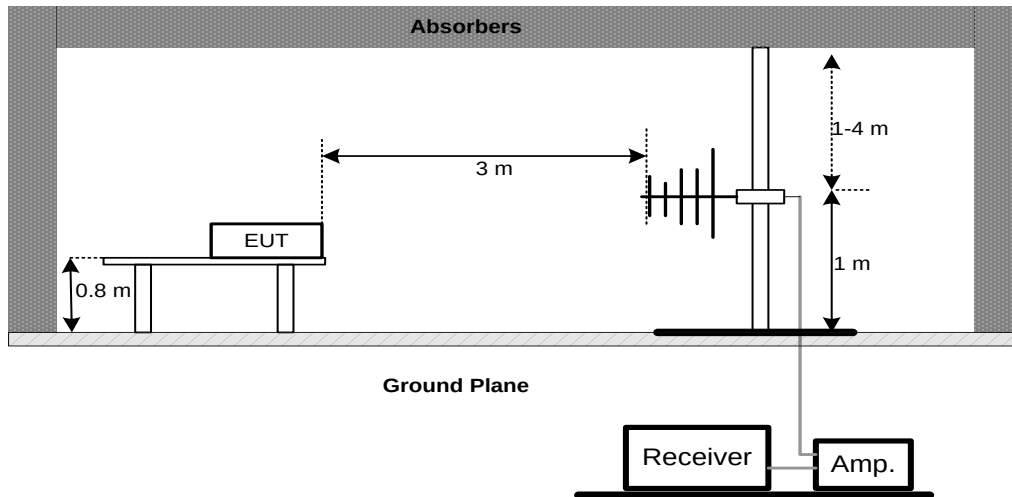

##### (B) Radiated Emission Test Set-Up Frequency 1 GHz

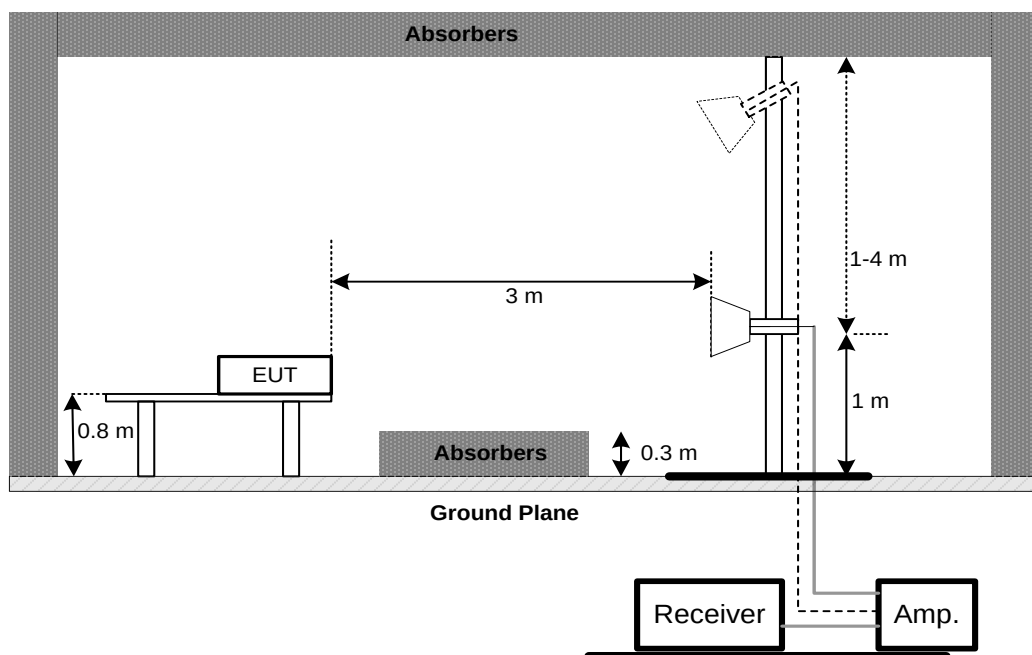


#### 4.2.6 TEST RESULTS-BELOW 1GHZ

Remark :


- (1) All readings are Peak unless otherwise stated QP in column of 『Note』 . Peak denotes that the Peak reading compliance with the QP Limits and then QP Mode measurement didn't perform ◦
- (2) Measuring frequency range from 30MHz to 1000MHz ◦
- (3) If the peak scan value lower limit more than 20dB, then this signal data does not show in table ◦

|               |                                                          |                   |          |
|---------------|----------------------------------------------------------|-------------------|----------|
| EUT           | Smart Phone                                              | Model Name        | MHA-L29  |
| Temperature   | 25°C                                                     | Relative Humidity | 60%      |
| Test Voltage  | AC 120V/60Hz                                             | Polarization      | Vertical |
| Test Mode     | USB copy(EUT with PC)+Idle+ Earphone                     |                   |          |
| Note          | USB Cable: Honglin +Battery: Desay+ Earphone: Lianchuang |                   |          |
| Test Engineer | Kevin Li                                                 |                   |          |

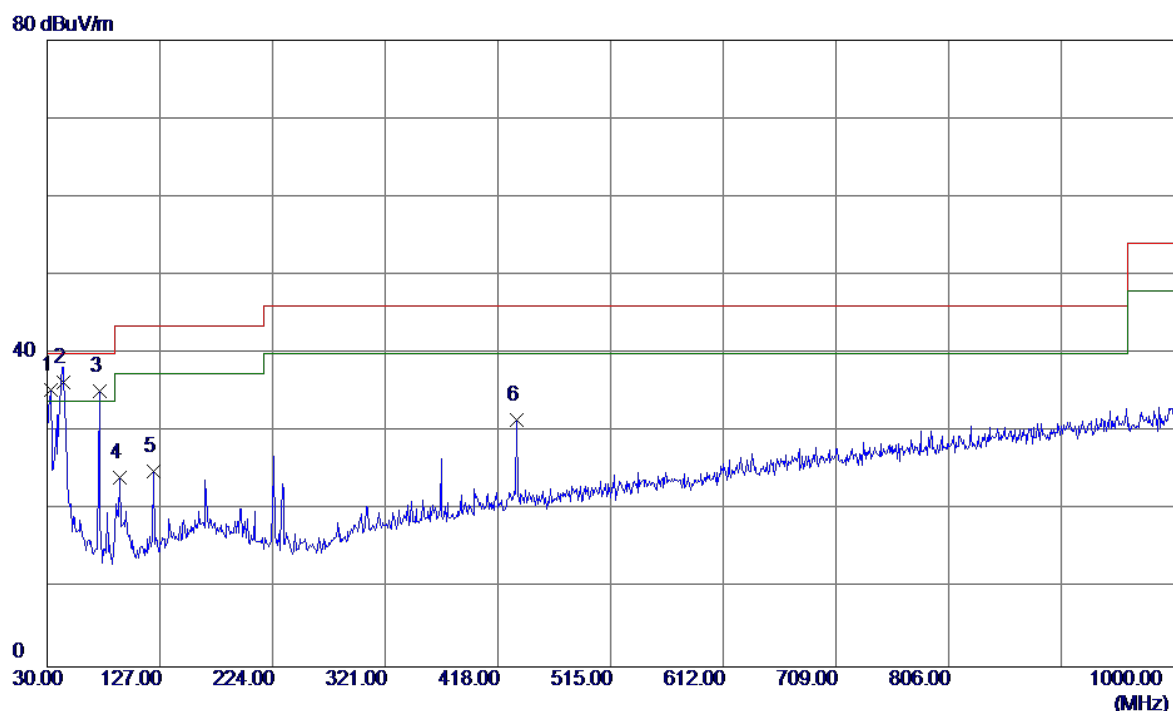


| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|
| 1   | 32.9100      | 48.90                      | -13.53                  | 35.37                     | 40.00           | -4.63        | QP       |
| 2 * | 44.0650      | 48.26                      | -11.95                  | 36.31                     | 40.00           | -3.69        | QP       |
| 3   | 75.1050      | 50.94                      | -15.68                  | 35.26                     | 40.00           | -4.74        | QP       |
| 4   | 92.5650      | 41.63                      | -17.40                  | 24.23                     | 43.50           | -19.27       | QP       |
| 5   | 121.6650     | 38.57                      | -13.56                  | 25.01                     | 43.50           | -18.49       | QP       |
| 6   | 434.0050     | 38.91                      | -7.37                   | 31.54                     | 46.00           | -14.46       | QP       |

|               |                                                          |                   |            |
|---------------|----------------------------------------------------------|-------------------|------------|
| EUT           | Smart Phone                                              | Model Name        | MHA-L29    |
| Temperature   | 25°C                                                     | Relative Humidity | 60%        |
| Test Voltage  | AC 120V/60Hz                                             | Polarization      | Horizontal |
| Test Mode     | USB copy(EUT with PC)+Idle+ Earphone                     |                   |            |
| Note          | USB Cable: Honglin +Battery: Desay+ Earphone: Lianchuang |                   |            |
| Test Engineer | Kevin Li                                                 |                   |            |

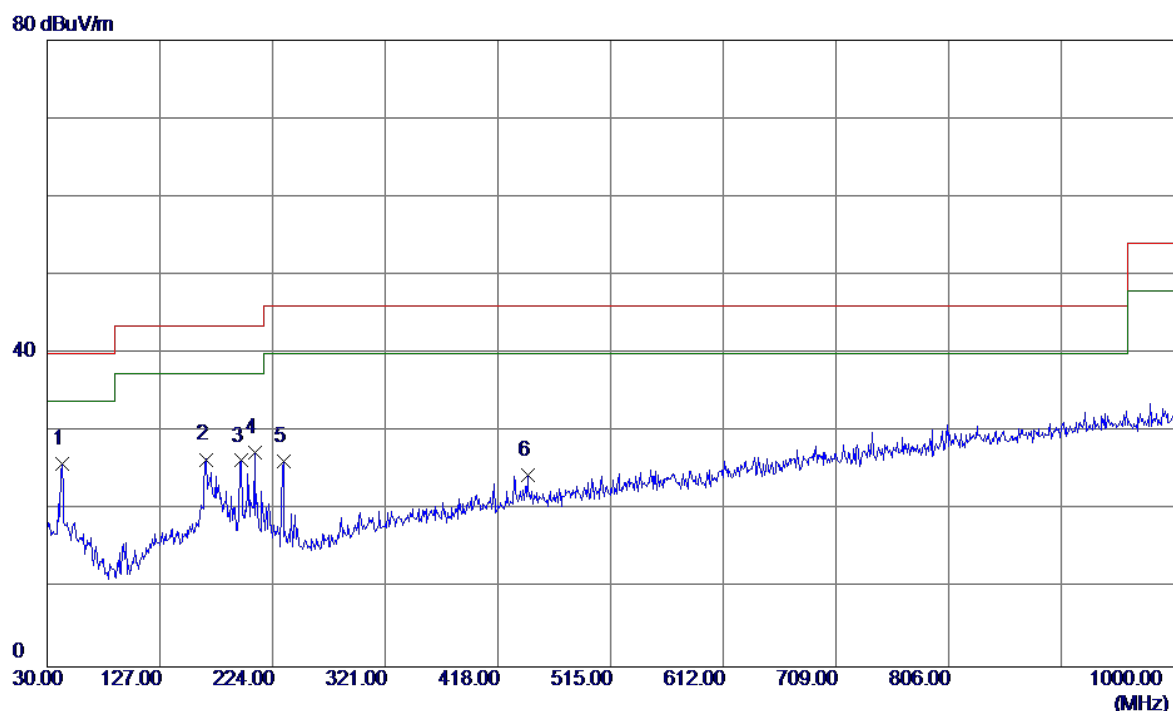

| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|
| 1 * | 43.0950      | 38.14                      | -12.19                  | 25.95                     | 40.00           | -14.05       | QP       |
| 2   | 166.7700     | 37.71                      | -11.23                  | 26.48                     | 43.50           | -17.02       | QP       |
| 3   | 196.8400     | 38.25                      | -11.93                  | 26.32                     | 43.50           | -17.18       | QP       |
| 4   | 208.9650     | 40.29                      | -12.99                  | 27.30                     | 43.50           | -16.20       | QP       |
| 5   | 233.2150     | 39.51                      | -13.27                  | 26.24                     | 46.00           | -19.76       | QP       |
| 6   | 443.7050     | 31.66                      | -7.13                   | 24.53                     | 46.00           | -21.47       | QP       |


|               |                                                           |                   |          |
|---------------|-----------------------------------------------------------|-------------------|----------|
| EUT           | Smart Phone                                               | Model Name        | MHA-L29  |
| Temperature   | 25°C                                                      | Relative Humidity | 60%      |
| Test Voltage  | AC 120V/60Hz                                              | Polarization      | Vertical |
| Test Mode     | USB copy(EUT with PC)+Idle+ Earphone                      |                   |          |
| Note          | USB Cable: CONNREX +Battery: Sunwoda+ Earphone: QUANCHENG |                   |          |
| Test Engineer | Kevin Li                                                  |                   |          |

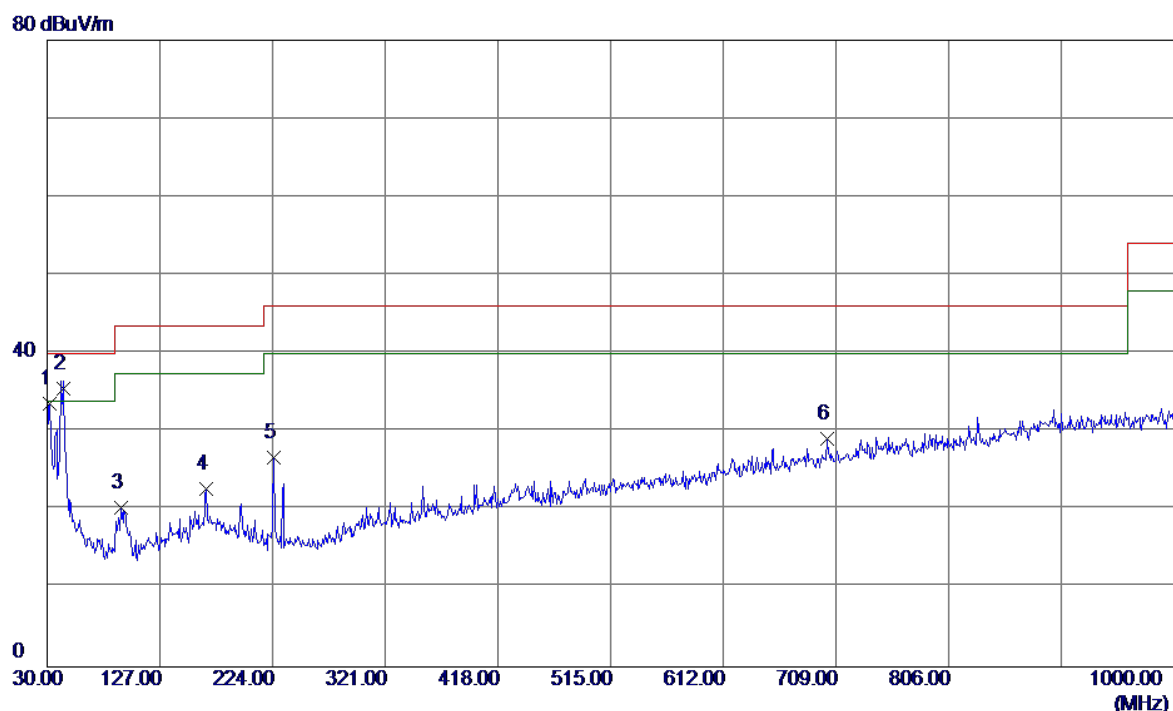

| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|
| 1   | 31.9400      | 47.28                      | -13.68                  | 33.60                     | 40.00           | -6.40        | QP       |
| 2 * | 44.0650      | 47.47                      | -11.95                  | 35.52                     | 40.00           | -4.48        | QP       |
| 3   | 94.0199      | 37.80                      | -17.48                  | 20.32                     | 43.50           | -23.18       | QP       |
| 4   | 166.7700     | 33.97                      | -11.23                  | 22.74                     | 43.50           | -20.76       | QP       |
| 5   | 224.9700     | 40.16                      | -13.39                  | 26.77                     | 46.00           | -19.23       | QP       |
| 6   | 701.2400     | 30.19                      | -1.05                   | 29.14                     | 46.00           | -16.86       | QP       |


|               |                                                           |                   |            |
|---------------|-----------------------------------------------------------|-------------------|------------|
| EUT           | Smart Phone                                               | Model Name        | MHA-L29    |
| Temperature   | 25°C                                                      | Relative Humidity | 60%        |
| Test Voltage  | AC 120V/60Hz                                              | Polarization      | Horizontal |
| Test Mode     | USB copy(EUT with PC)+Idle+ Earphone                      |                   |            |
| Note          | USB Cable: CONNREX +Battery: Sunwoda+ Earphone: QUANCHENG |                   |            |
| Test Engineer | Kevin Li                                                  |                   |            |

80 dBuV/m

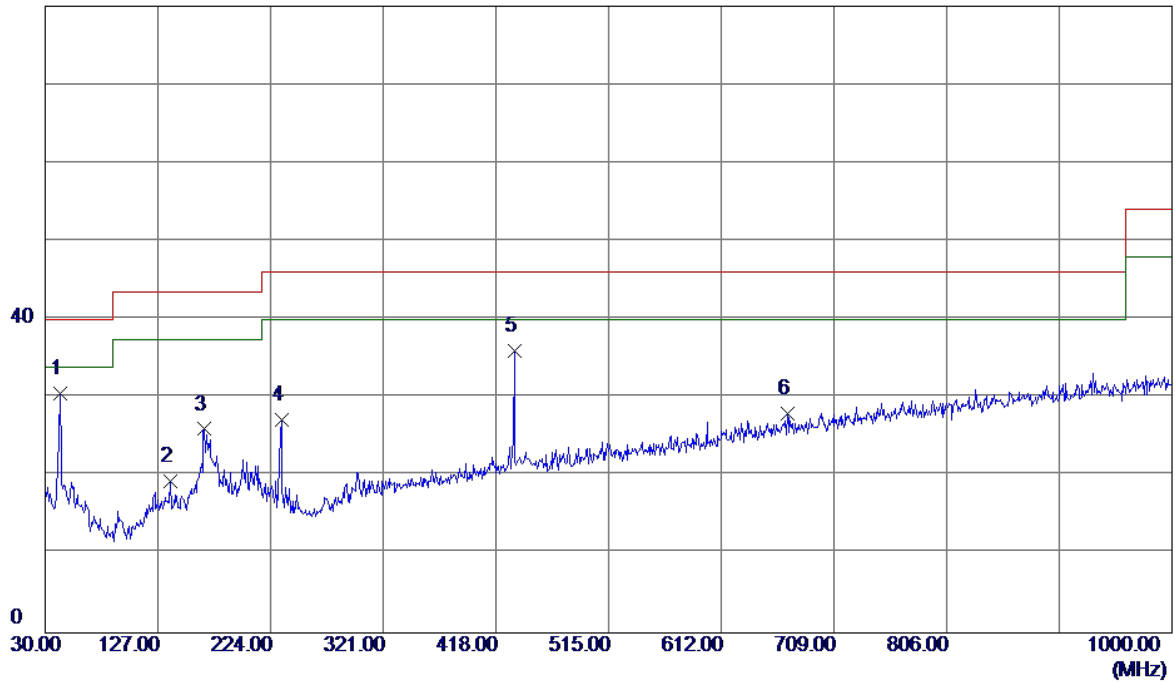


| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|
| 1 * | 42.6100      | 42.88                      | -12.32                  | 30.56                     | 40.00           | -9.44        | QP       |
| 2   | 137.6700     | 32.01                      | -12.58                  | 19.43                     | 43.50           | -24.07       | QP       |
| 3   | 166.7700     | 37.23                      | -11.23                  | 26.00                     | 43.50           | -17.50       | QP       |
| 4   | 233.2150     | 40.46                      | -13.27                  | 27.19                     | 46.00           | -18.81       | QP       |
| 5   | 434.0050     | 43.43                      | -7.37                   | 36.06                     | 46.00           | -9.94        | QP       |
| 6   | 668.7450     | 29.86                      | -1.84                   | 28.02                     | 46.00           | -17.98       | QP       |

|               |                                                             |                   |          |
|---------------|-------------------------------------------------------------|-------------------|----------|
| EUT           | Smart Phone                                                 | Model Name        | MHA-L29  |
| Temperature   | 25°C                                                        | Relative Humidity | 60%      |
| Test Voltage  | AC 120V/60Hz                                                | Polarization      | Vertical |
| Test Mode     | USB copy(EUT with PC)+Idle+ Earphone                        |                   |          |
| Note          | USB Cable: LUXSHAREICT +Battery: SCUD+ Earphone: Lianchuang |                   |          |
| Test Engineer | Kevin Li                                                    |                   |          |

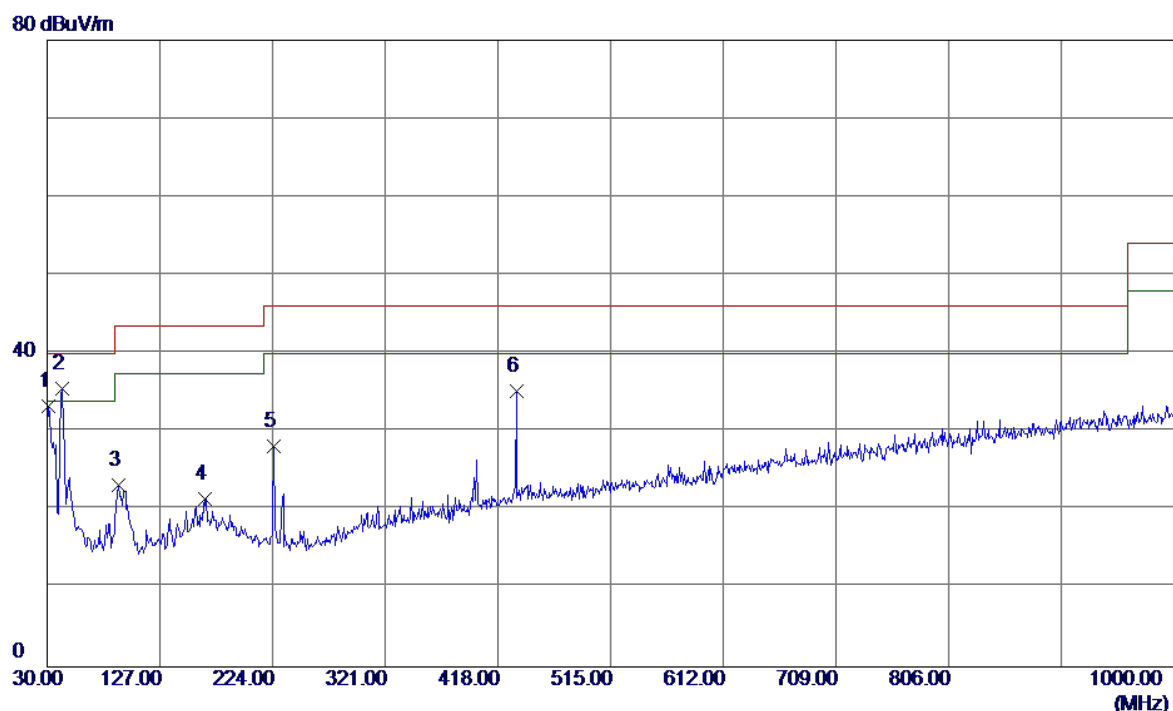


| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|
| 1   | 31.4550      | 47.00                      | -13.76                  | 33.24                     | 40.00           | -6.76        | QP       |
| 2 * | 42.6100      | 47.87                      | -12.32                  | 35.55                     | 40.00           | -4.45        | QP       |
| 3   | 91.1100      | 40.50                      | -17.32                  | 23.18                     | 43.50           | -20.32       | QP       |
| 4   | 166.2850     | 32.68                      | -11.25                  | 21.43                     | 43.50           | -22.07       | QP       |
| 5   | 224.9700     | 41.53                      | -13.39                  | 28.14                     | 46.00           | -17.86       | QP       |
| 6   | 434.0050     | 42.64                      | -7.37                   | 35.27                     | 46.00           | -10.73       | QP       |

|               |                                                             |                   |            |
|---------------|-------------------------------------------------------------|-------------------|------------|
| EUT           | Smart Phone                                                 | Model Name        | MHA-L29    |
| Temperature   | 25°C                                                        | Relative Humidity | 60%        |
| Test Voltage  | AC 120V/60Hz                                                | Polarization      | Horizontal |
| Test Mode     | USB copy(EUT with PC)+Idle+ Earphone                        |                   |            |
| Note          | USB Cable: LUXSHAREICT +Battery: SCUD+ Earphone: Lianchuang |                   |            |
| Test Engineer | Kevin Li                                                    |                   |            |

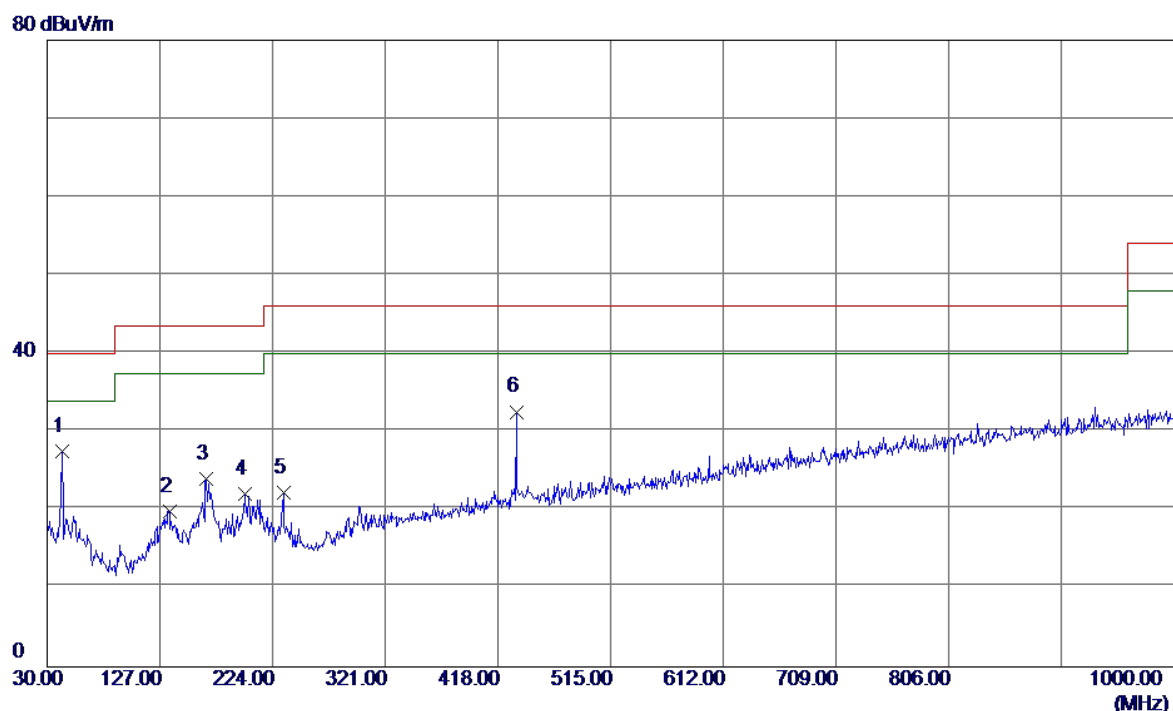


| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|
| 1 * | 42.6100      | 39.88                      | -12.32                  | 27.56                     | 40.00           | -12.44       | QP       |
| 2   | 135.2450     | 32.58                      | -12.72                  | 19.86                     | 43.50           | -23.64       | QP       |
| 3   | 166.7700     | 35.23                      | -11.23                  | 24.00                     | 43.50           | -19.50       | QP       |
| 4   | 200.2350     | 34.28                      | -12.15                  | 22.13                     | 43.50           | -21.37       | QP       |
| 5   | 233.2150     | 35.46                      | -13.27                  | 22.19                     | 46.00           | -23.81       | QP       |
| 6   | 434.0050     | 39.93                      | -7.37                   | 32.56                     | 46.00           | -13.44       | QP       |

|               |                                                                  |                   |          |
|---------------|------------------------------------------------------------------|-------------------|----------|
| EUT           | Smart Phone                                                      | Model Name        | MHA-L29  |
| Temperature   | 25°C                                                             | Relative Humidity | 60%      |
| Test Voltage  | AC 120V/60Hz                                                     | Polarization      | Vertical |
| Test Mode     | Adapter+Idle+BT+2.4G WIFI+GPS+Camera on+Earphone                 |                   |          |
| Note          | Adapter:Phitek(US)+Honglin +Battery: Desay+ Earphone: Lianchuang |                   |          |
| Test Engineer | Kevin Li                                                         |                   |          |

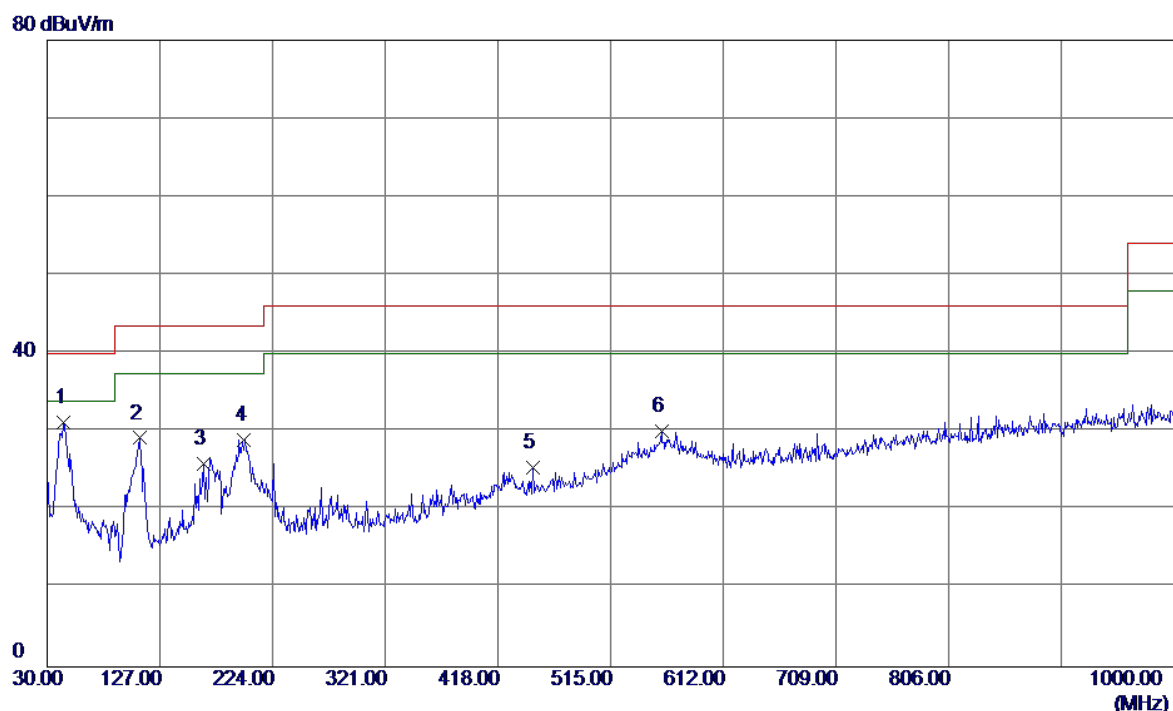

| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|
| 1 * | 44.5500      | 43.07                      | -11.90                  | 31.17                     | 40.00           | -8.83        | QP       |
| 2   | 109.5400     | 44.41                      | -15.21                  | 29.20                     | 43.50           | -14.30       | QP       |
| 3   | 164.3450     | 37.25                      | -11.34                  | 25.91                     | 43.50           | -17.59       | QP       |
| 4   | 199.7500     | 41.14                      | -12.11                  | 29.03                     | 43.50           | -14.47       | QP       |
| 5   | 448.5550     | 32.44                      | -7.02                   | 25.42                     | 46.00           | -20.58       | QP       |
| 6   | 559.1350     | 34.55                      | -4.40                   | 30.15                     | 46.00           | -15.85       | QP       |


|               |                                                                  |                   |            |
|---------------|------------------------------------------------------------------|-------------------|------------|
| EUT           | Smart Phone                                                      | Model Name        | MHA-L29    |
| Temperature   | 25°C                                                             | Relative Humidity | 60%        |
| Test Voltage  | AC 120V/60Hz                                                     | Polarization      | Horizontal |
| Test Mode     | Adapter+Idle+BT+2.4G WIFI+GPS+Camera on+Earphone                 |                   |            |
| Note          | Adapter:Phitek(US)+Honglin +Battery: Desay+ Earphone: Lianchuang |                   |            |
| Test Engineer | Kevin Li                                                         |                   |            |

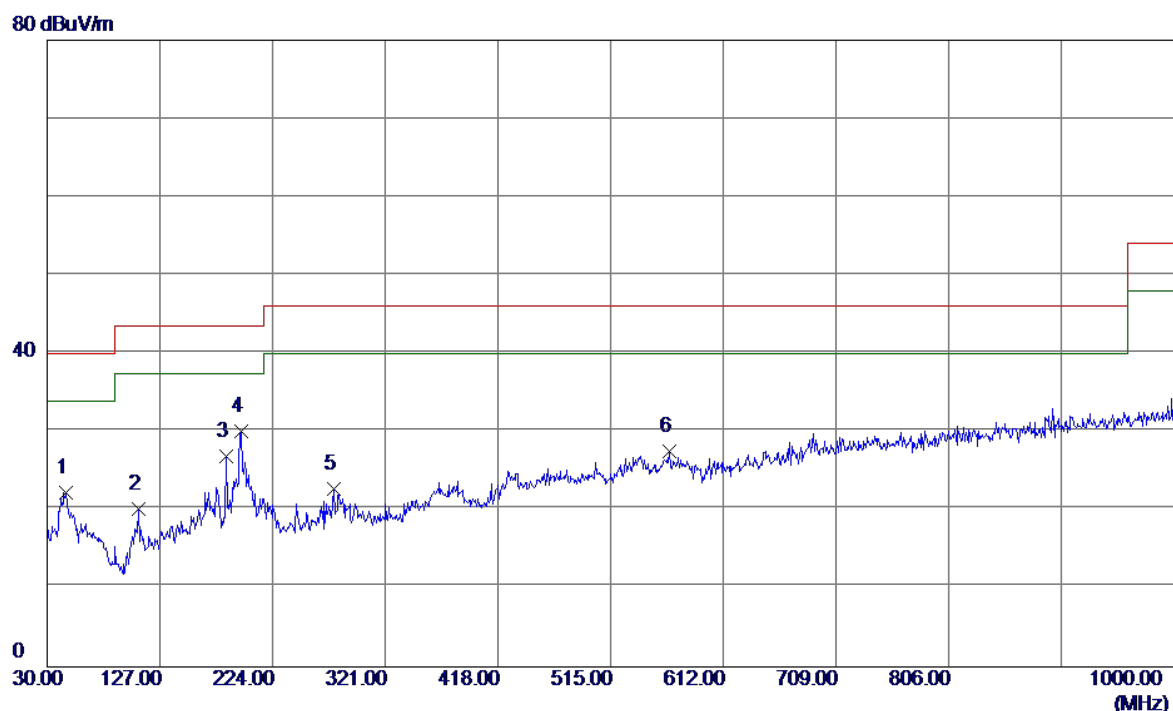

| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|
| 1   | 46.4900      | 34.06                      | -11.76                  | 22.30                     | 40.00           | -17.70       | QP       |
| 2   | 109.0550     | 35.41                      | -15.30                  | 20.11                     | 43.50           | -23.39       | QP       |
| 3   | 184.2300     | 38.33                      | -11.45                  | 26.88                     | 43.50           | -16.62       | QP       |
| 4 * | 196.8400     | 41.96                      | -11.93                  | 30.03                     | 43.50           | -13.47       | QP       |
| 5   | 276.3800     | 35.08                      | -12.42                  | 22.66                     | 46.00           | -23.34       | QP       |
| 6   | 565.9250     | 31.83                      | -4.29                   | 27.54                     | 46.00           | -18.46       | QP       |


|               |                                                                   |                   |          |
|---------------|-------------------------------------------------------------------|-------------------|----------|
| EUT           | Smart Phone                                                       | Model Name        | MHA-L29  |
| Temperature   | 25°C                                                              | Relative Humidity | 60%      |
| Test Voltage  | AC 120V/60Hz                                                      | Polarization      | Vertical |
| Test Mode     | Adapter+Idle+BT+2.4G WIFI+GPS+Camera on+Earphone                  |                   |          |
| Note          | Adapter:Salcomp(US)+Honglin +Battery: Desay+ Earphone: Lianchuang |                   |          |
| Test Engineer | Kevin Li                                                          |                   |          |

80 dBuV/m

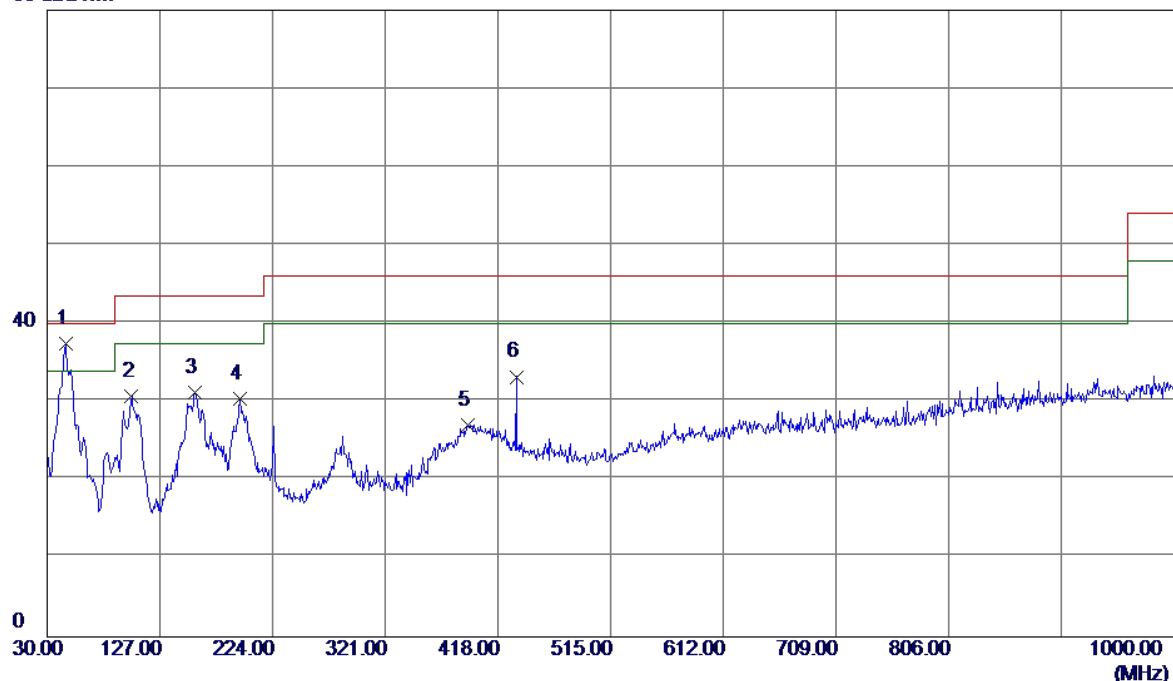


| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|
| 1 * | 46.0050      | 49.12                      | -11.74                  | 37.38                     | 40.00           | -2.62        | QP       |
| 2   | 102.7500     | 47.13                      | -16.41                  | 30.72                     | 43.50           | -12.78       | QP       |
| 3   | 157.5549     | 42.81                      | -11.65                  | 31.16                     | 43.50           | -12.34       | QP       |
| 4   | 196.3550     | 42.30                      | -11.89                  | 30.41                     | 43.50           | -13.09       | QP       |
| 5   | 391.8100     | 35.50                      | -8.42                   | 27.08                     | 46.00           | -18.92       | QP       |
| 6   | 434.0050     | 40.57                      | -7.37                   | 33.20                     | 46.00           | -12.80       | QP       |

|               |                                                                   |                   |            |
|---------------|-------------------------------------------------------------------|-------------------|------------|
| EUT           | Smart Phone                                                       | Model Name        | MHA-L29    |
| Temperature   | 25°C                                                              | Relative Humidity | 60%        |
| Test Voltage  | AC 120V/60Hz                                                      | Polarization      | Horizontal |
| Test Mode     | Adapter+Idle+BT+2.4G WIFI+GPS+Camera on+Earphone                  |                   |            |
| Note          | Adapter:Salcomp(US)+Honglin +Battery: Desay+ Earphone: Lianchuang |                   |            |
| Test Engineer | Kevin Li                                                          |                   |            |

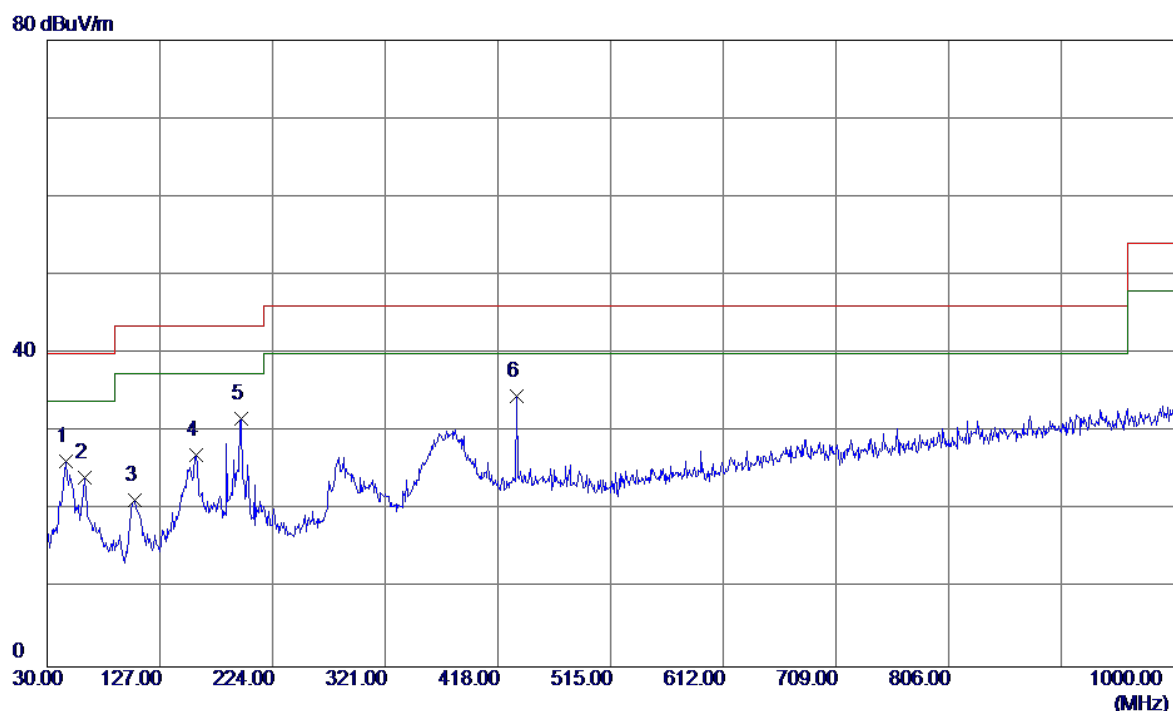

| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|
| 1   | 46.4900      | 37.99                      | -11.76                  | 26.23                     | 40.00           | -13.77       | QP       |
| 2   | 62.4950      | 37.68                      | -13.47                  | 24.21                     | 40.00           | -15.79       | QP       |
| 3   | 105.1750     | 37.21                      | -15.98                  | 21.23                     | 43.50           | -22.27       | QP       |
| 4   | 158.5250     | 38.69                      | -11.60                  | 27.09                     | 43.50           | -16.41       | QP       |
| 5   | 196.8400     | 43.67                      | -11.93                  | 31.74                     | 43.50           | -11.76       | QP       |
| 6 * | 434.0050     | 41.86                      | -7.37                   | 34.49                     | 46.00           | -11.51       | QP       |


|               |                                                              |                   |          |
|---------------|--------------------------------------------------------------|-------------------|----------|
| EUT           | Smart Phone                                                  | Model Name        | MHA-L29  |
| Temperature   | 25°C                                                         | Relative Humidity | 60%      |
| Test Voltage  | AC 120V/60Hz                                                 | Polarization      | Vertical |
| Test Mode     | Adapter+Idle+BT+2.4G WIFI+GPS+Camera on+Earphone             |                   |          |
| Note          | Adapter:HK(US)+Honglin +Battery: Desay+ Earphone: Lianchuang |                   |          |
| Test Engineer | Kevin Li                                                     |                   |          |

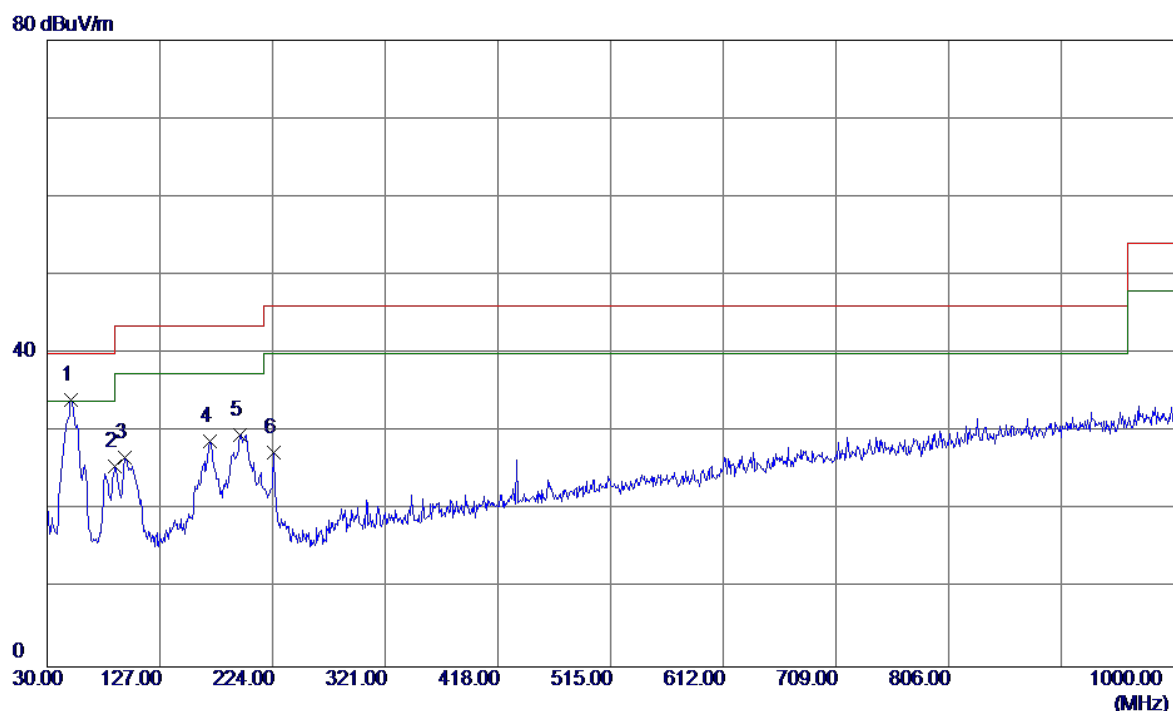

| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|
| 1 * | 50.8550      | 45.79                      | -11.77                  | 34.02                     | 40.00           | -5.98        | QP       |
| 2   | 88.6850      | 42.77                      | -17.19                  | 25.58                     | 43.50           | -17.92       | QP       |
| 3   | 96.9300      | 43.96                      | -17.28                  | 26.68                     | 43.50           | -16.82       | QP       |
| 4   | 170.1649     | 39.88                      | -11.09                  | 28.79                     | 43.50           | -14.71       | QP       |
| 5   | 196.3550     | 41.56                      | -11.89                  | 29.67                     | 43.50           | -13.83       | QP       |
| 6   | 224.9700     | 40.81                      | -13.39                  | 27.42                     | 46.00           | -18.58       | QP       |

|               |                                                              |                   |            |
|---------------|--------------------------------------------------------------|-------------------|------------|
| EUT           | Smart Phone                                                  | Model Name        | MHA-L29    |
| Temperature   | 25°C                                                         | Relative Humidity | 60%        |
| Test Voltage  | AC 120V/60Hz                                                 | Polarization      | Horizontal |
| Test Mode     | Adapter+Idle+BT+2.4G WIFI+GPS+Camera on+Earphone             |                   |            |
| Note          | Adapter:HK(US)+Honglin +Battery: Desay+ Earphone: Lianchuang |                   |            |
| Test Engineer | Kevin Li                                                     |                   |            |


80 dBuV/m

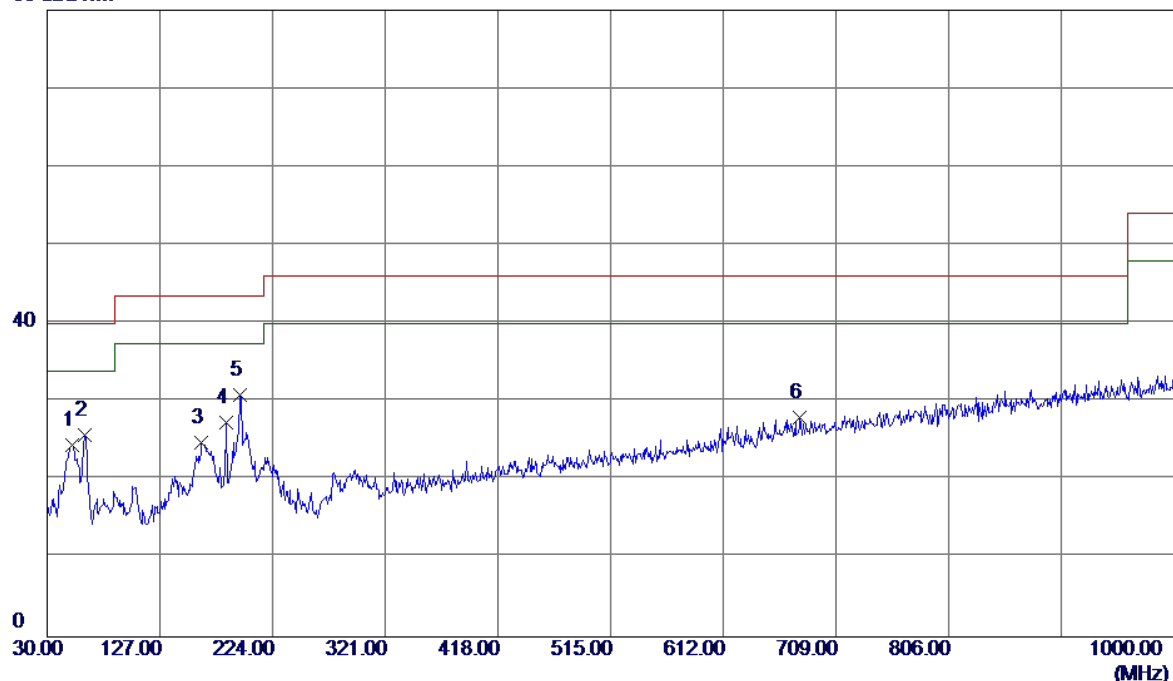

| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|
| 1   | 51.8250      | 36.14                      | -11.61                  | 24.53                     | 40.00           | -15.47       | QP       |
| 2   | 62.4950      | 39.20                      | -13.47                  | 25.73                     | 40.00           | -14.27       | QP       |
| 3   | 162.8900     | 36.16                      | -11.41                  | 24.75                     | 43.50           | -18.75       | QP       |
| 4   | 184.2300     | 38.85                      | -11.45                  | 27.40                     | 43.50           | -16.10       | QP       |
| 5 * | 196.3550     | 42.72                      | -11.89                  | 30.83                     | 43.50           | -12.67       | QP       |
| 6   | 677.9600     | 29.56                      | -1.61                   | 27.95                     | 46.00           | -18.05       | QP       |

|               |                                                                  |                   |          |
|---------------|------------------------------------------------------------------|-------------------|----------|
| EUT           | Smart Phone                                                      | Model Name        | MHA-L29  |
| Temperature   | 25°C                                                             | Relative Humidity | 60%      |
| Test Voltage  | AC 120V/60Hz                                                     | Polarization      | Vertical |
| Test Mode     | Adapter+Idle+BT+2.4G WIFI+GPS+Camera on+Earphone                 |                   |          |
| Note          | Adapter:Phitek(EU)+Honglin +Battery: Desay+ Earphone: Lianchuang |                   |          |
| Test Engineer | Kevin Li                                                         |                   |          |


80 dBuV/m

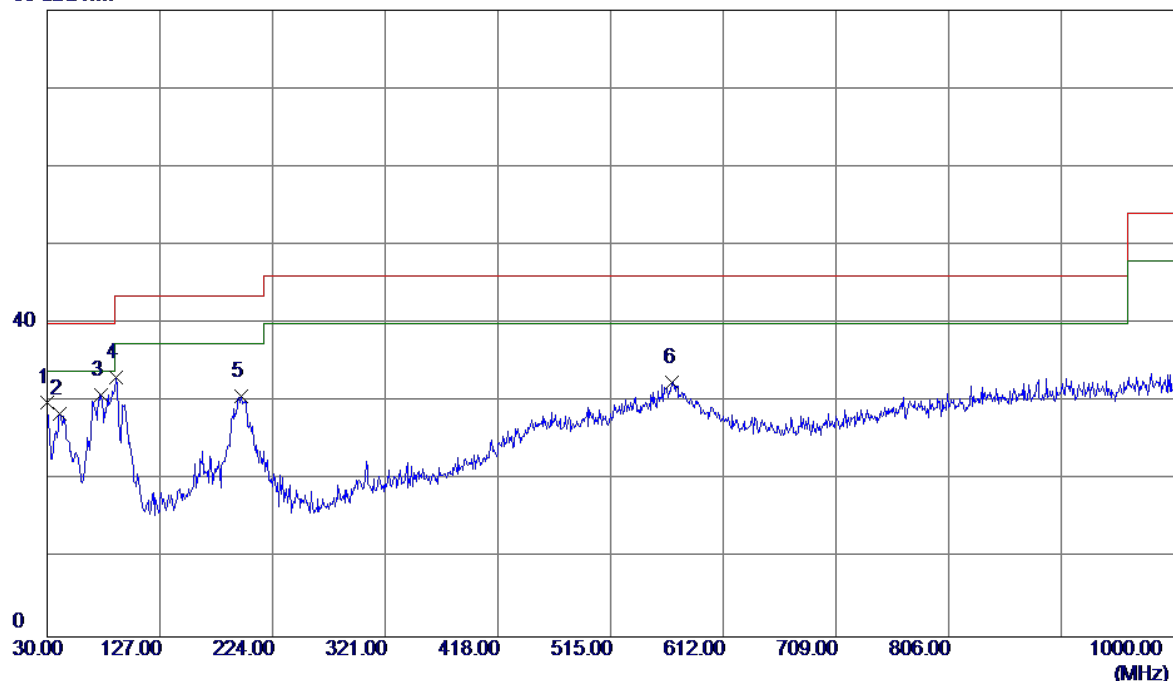

| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|
| 1   | 30.0000      | 43.89                      | -13.99                  | 29.90                     | 40.00           | -10.10       | QP       |
| 2   | 40.6699      | 41.07                      | -12.62                  | 28.45                     | 40.00           | -11.55       | QP       |
| 3 * | 76.5600      | 46.81                      | -15.99                  | 30.82                     | 40.00           | -9.18        | QP       |
| 4   | 89.6550      | 50.35                      | -17.25                  | 33.10                     | 43.50           | -10.40       | QP       |
| 5   | 197.3250     | 42.70                      | -11.96                  | 30.74                     | 43.50           | -12.76       | QP       |
| 6   | 568.3500     | 36.69                      | -4.25                   | 32.44                     | 46.00           | -13.56       | QP       |


|               |                                                                  |                   |            |
|---------------|------------------------------------------------------------------|-------------------|------------|
| EUT           | Smart Phone                                                      | Model Name        | MHA-L29    |
| Temperature   | 25°C                                                             | Relative Humidity | 60%        |
| Test Voltage  | AC 120V/60Hz                                                     | Polarization      | Horizontal |
| Test Mode     | Adapter+Idle+BT+2.4G WIFI+GPS+Camera on+Earphone                 |                   |            |
| Note          | Adapter:Phitek(EU)+Honglin +Battery: Desay+ Earphone: Lianchuang |                   |            |
| Test Engineer | Kevin Li                                                         |                   |            |

80 dBuV/m

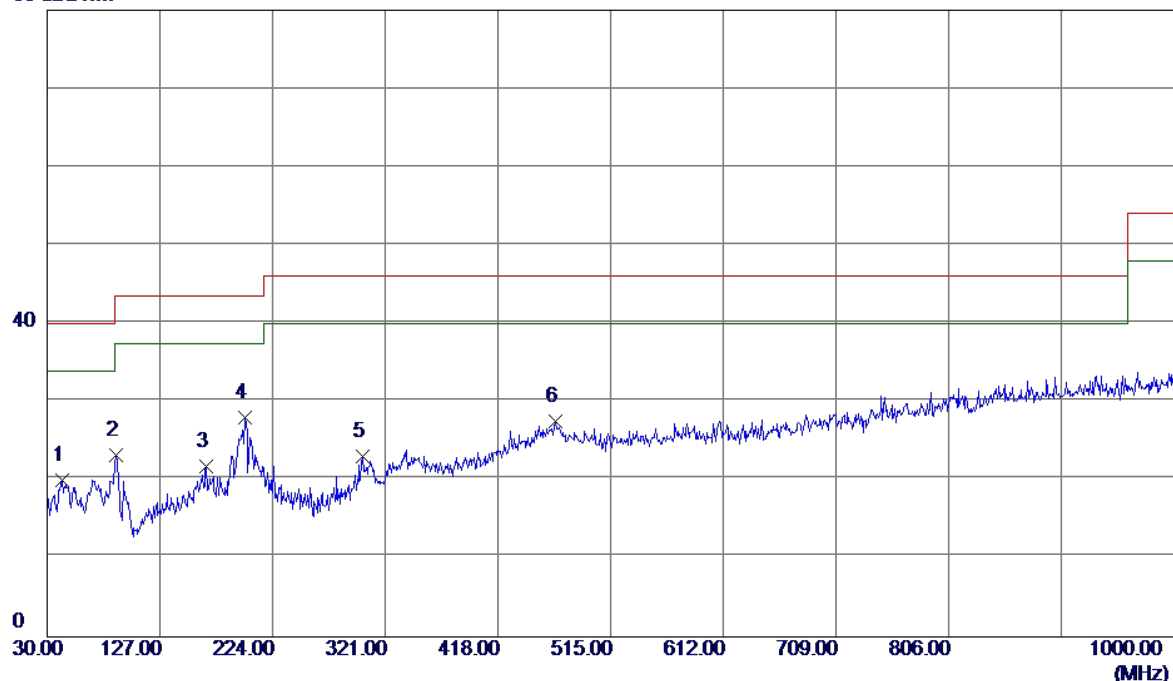

| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|
| 1   | 42.6100      | 32.25                      | -12.32                  | 19.93                     | 40.00           | -20.07       | QP       |
| 2   | 89.1700      | 40.36                      | -17.22                  | 23.14                     | 43.50           | -20.36       | QP       |
| 3   | 166.7700     | 32.93                      | -11.23                  | 21.70                     | 43.50           | -21.80       | QP       |
| 4 * | 200.2350     | 40.09                      | -12.15                  | 27.94                     | 43.50           | -15.56       | QP       |
| 5   | 301.6000     | 33.63                      | -10.61                  | 23.02                     | 46.00           | -22.98       | QP       |
| 6   | 467.9550     | 34.07                      | -6.57                   | 27.50                     | 46.00           | -18.50       | QP       |


|               |                                                                   |                   |          |
|---------------|-------------------------------------------------------------------|-------------------|----------|
| EUT           | Smart Phone                                                       | Model Name        | MHA-L29  |
| Temperature   | 25°C                                                              | Relative Humidity | 60%      |
| Test Voltage  | AC 120V/60Hz                                                      | Polarization      | Vertical |
| Test Mode     | Adapter+Idle+BT+2.4G WIFI+GPS+Camera on+Earphone                  |                   |          |
| Note          | Adapter:Salcomp(EU)+Honglin +Battery: Desay+ Earphone: Lianchuang |                   |          |
| Test Engineer | Kevin Li                                                          |                   |          |

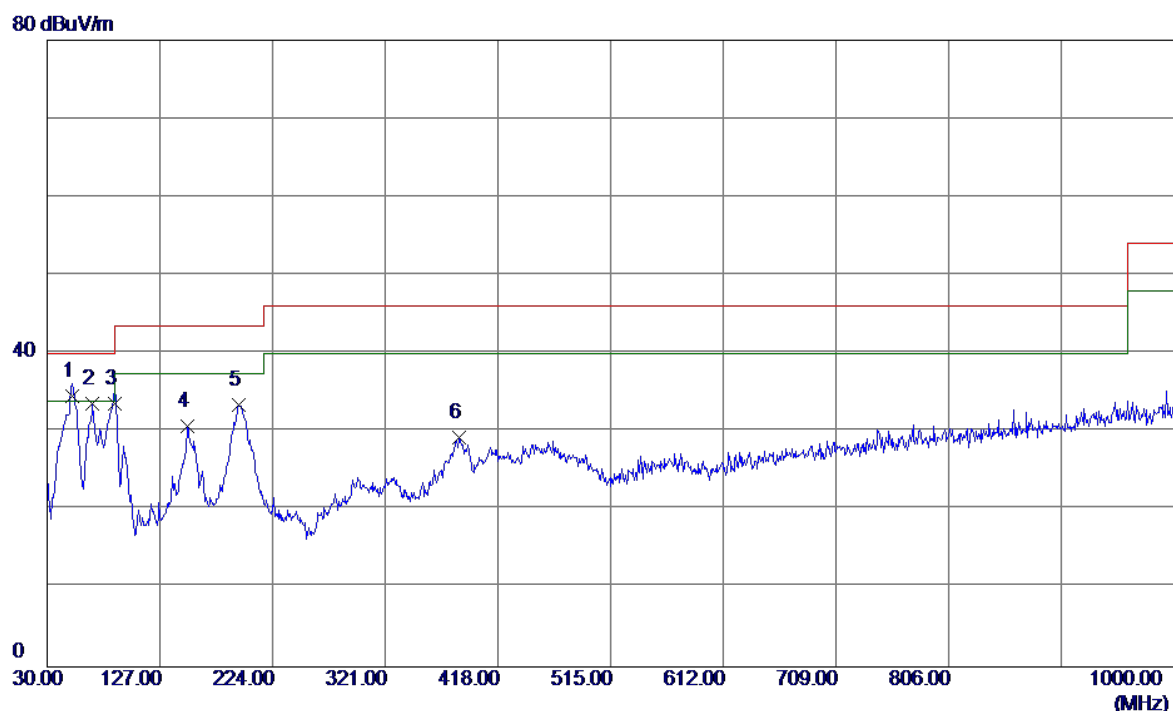

| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|
| 1 * | 51.8250      | 46.12                      | -11.61                  | 34.51                     | 40.00           | -5.49        | QP       |
| 2   | 68.8000      | 48.19                      | -14.62                  | 33.57                     | 40.00           | -6.43        | QP       |
| 3   | 87.7149      | 50.81                      | -17.14                  | 33.67                     | 40.00           | -6.33        | QP       |
| 4   | 150.7650     | 42.68                      | -11.96                  | 30.72                     | 43.50           | -12.78       | QP       |
| 5   | 195.3850     | 45.24                      | -11.83                  | 33.41                     | 43.50           | -10.09       | QP       |
| 6   | 385.0200     | 37.89                      | -8.59                   | 29.30                     | 46.00           | -16.70       | QP       |

|               |                                                                   |                   |            |
|---------------|-------------------------------------------------------------------|-------------------|------------|
| EUT           | Smart Phone                                                       | Model Name        | MHA-L29    |
| Temperature   | 25°C                                                              | Relative Humidity | 60%        |
| Test Voltage  | AC 120V/60Hz                                                      | Polarization      | Horizontal |
| Test Mode     | Adapter+Idle+BT+2.4G WIFI+GPS+Camera on+Earphone                  |                   |            |
| Note          | Adapter:Salcomp(EU)+Honglin +Battery: Desay+ Earphone: Lianchuang |                   |            |
| Test Engineer | Kevin Li                                                          |                   |            |


80 dBuV/m

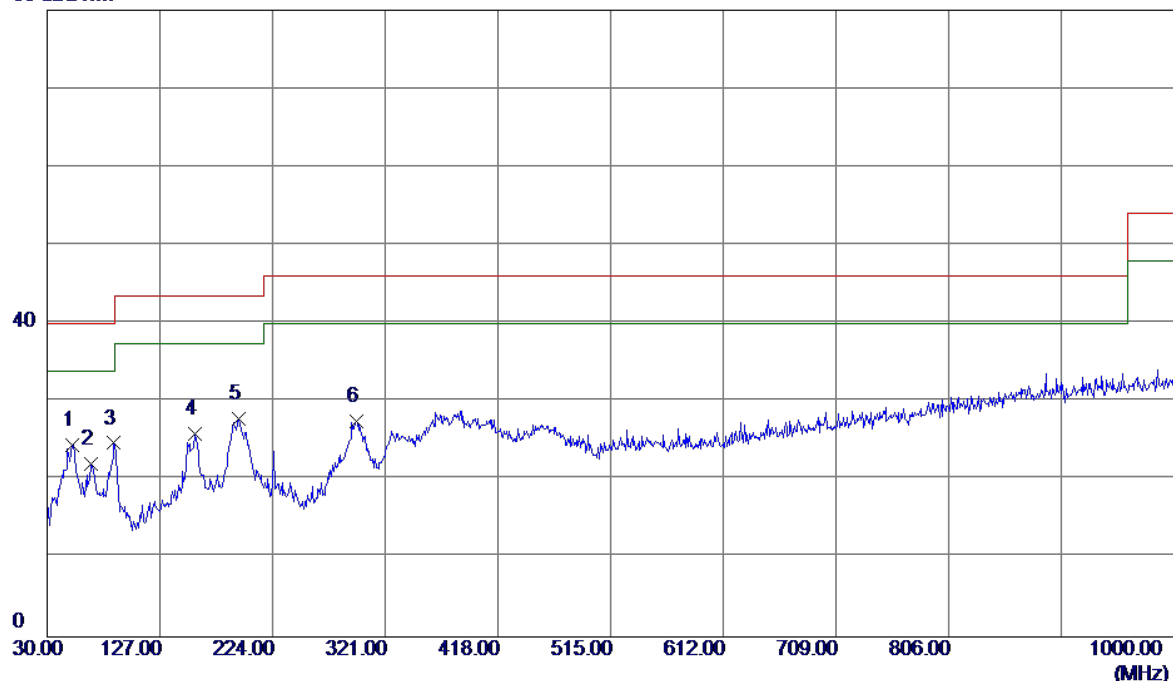

| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|
| 1   | 51.8250      | 36.13                      | -11.61                  | 24.52                     | 40.00           | -15.48       | QP       |
| 2   | 67.3450      | 36.37                      | -14.31                  | 22.06                     | 40.00           | -17.94       | QP       |
| 3 * | 87.2300      | 41.84                      | -17.12                  | 24.72                     | 40.00           | -15.28       | QP       |
| 4   | 157.5549     | 37.52                      | -11.65                  | 25.87                     | 43.50           | -17.63       | QP       |
| 5   | 194.4149     | 39.65                      | -11.77                  | 27.88                     | 43.50           | -15.62       | QP       |
| 6   | 296.2650     | 38.53                      | -11.04                  | 27.49                     | 46.00           | -18.51       | QP       |

|               |                                                              |                   |          |
|---------------|--------------------------------------------------------------|-------------------|----------|
| EUT           | Smart Phone                                                  | Model Name        | MHA-L29  |
| Temperature   | 25°C                                                         | Relative Humidity | 60%      |
| Test Voltage  | AC 120V/60Hz                                                 | Polarization      | Vertical |
| Test Mode     | Adapter+Idle+BT+2.4G WIFI+GPS+Camera on+Earphone             |                   |          |
| Note          | Adapter:HK(EU)+Honglin +Battery: Desay+ Earphone: Lianchuang |                   |          |
| Test Engineer | Kevin Li                                                     |                   |          |


80 dBuV/m

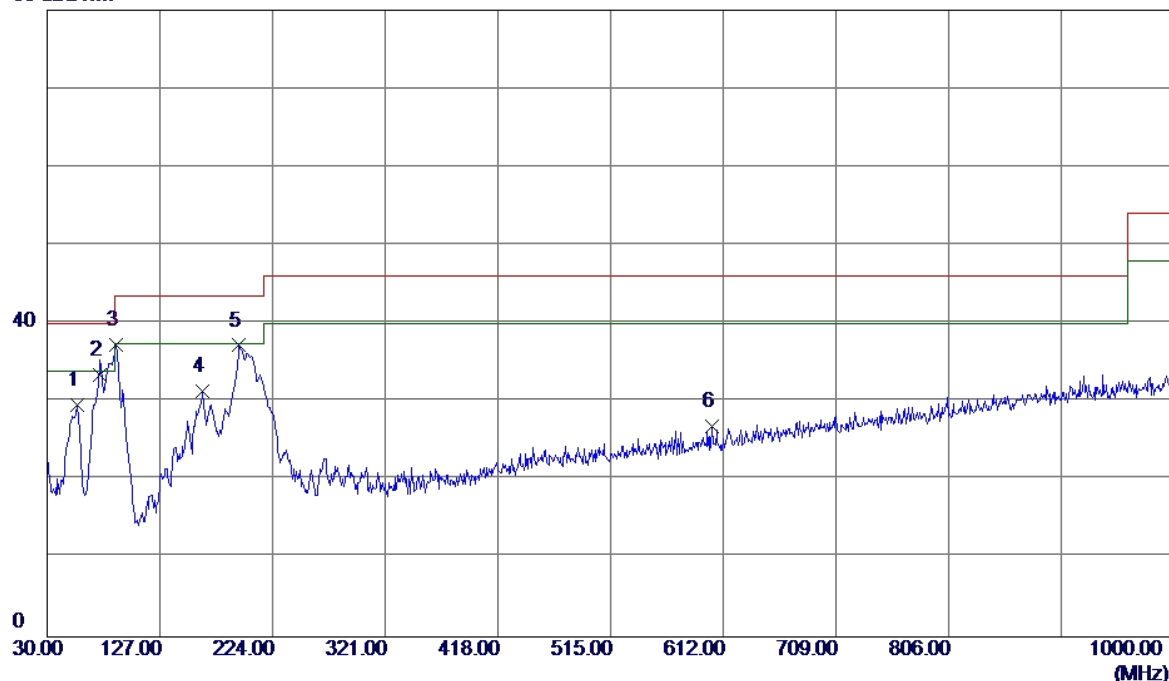

| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|
| 1   | 55.7050      | 41.78                      | -12.13                  | 29.65                     | 40.00           | -10.35       | QP       |
| 2   | 75.5899      | 49.17                      | -15.78                  | 33.39                     | 40.00           | -6.61        | QP       |
| 3 * | 89.1700      | 54.52                      | -17.22                  | 37.30                     | 43.50           | -6.20        | QP       |
| 4   | 163.8600     | 42.70                      | -11.36                  | 31.34                     | 43.50           | -12.16       | QP       |
| 5   | 195.3850     | 49.03                      | -11.83                  | 37.20                     | 43.50           | -6.30        | QP       |
| 6   | 602.3000     | 30.49                      | -3.67                   | 26.82                     | 46.00           | -19.18       | QP       |


|               |                                                              |                   |            |
|---------------|--------------------------------------------------------------|-------------------|------------|
| EUT           | Smart Phone                                                  | Model Name        | MHA-L29    |
| Temperature   | 25°C                                                         | Relative Humidity | 60%        |
| Test Voltage  | AC 120V/60Hz                                                 | Polarization      | Horizontal |
| Test Mode     | Adapter+Idle+BT+2.4G WIFI+GPS+Camera on+Earphone             |                   |            |
| Note          | Adapter:HK(EU)+Honglin +Battery: Desay+ Earphone: Lianchuang |                   |            |
| Test Engineer | Kevin Li                                                     |                   |            |

80 dBuV/m

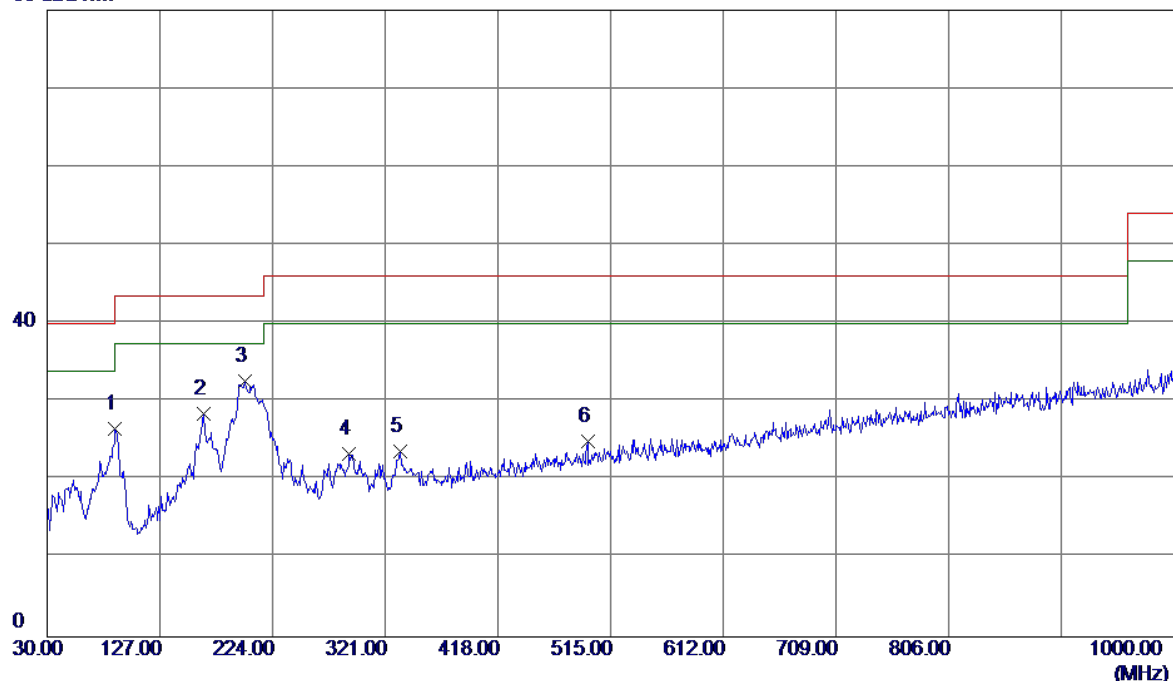

| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|
| 1   | 88.6850      | 43.76                      | -17.19                  | 26.57                     | 43.50           | -16.93       | QP       |
| 2   | 164.3450     | 39.84                      | -11.34                  | 28.50                     | 43.50           | -15.00       | QP       |
| 3 * | 200.2350     | 44.73                      | -12.15                  | 32.58                     | 43.50           | -10.92       | QP       |
| 4   | 289.9600     | 35.08                      | -11.69                  | 23.39                     | 46.00           | -22.61       | QP       |
| 5   | 334.0950     | 33.47                      | -9.85                   | 23.62                     | 46.00           | -22.38       | QP       |
| 6   | 495.1150     | 30.91                      | -5.96                   | 24.95                     | 46.00           | -21.05       | QP       |


|               |                                                                   |                   |          |
|---------------|-------------------------------------------------------------------|-------------------|----------|
| EUT           | Smart Phone                                                       | Model Name        | MHA-L29  |
| Temperature   | 25°C                                                              | Relative Humidity | 60%      |
| Test Voltage  | AC 120V/60Hz                                                      | Polarization      | Vertical |
| Test Mode     | Adapter+Idle+BT+5G WIFI+GPS+Camera on+Earphone                    |                   |          |
| Note          | Adapter:Salcomp(US)+Honglin +Battery: Desay+ Earphone: Lianchuang |                   |          |
| Test Engineer | Kevin Li                                                          |                   |          |

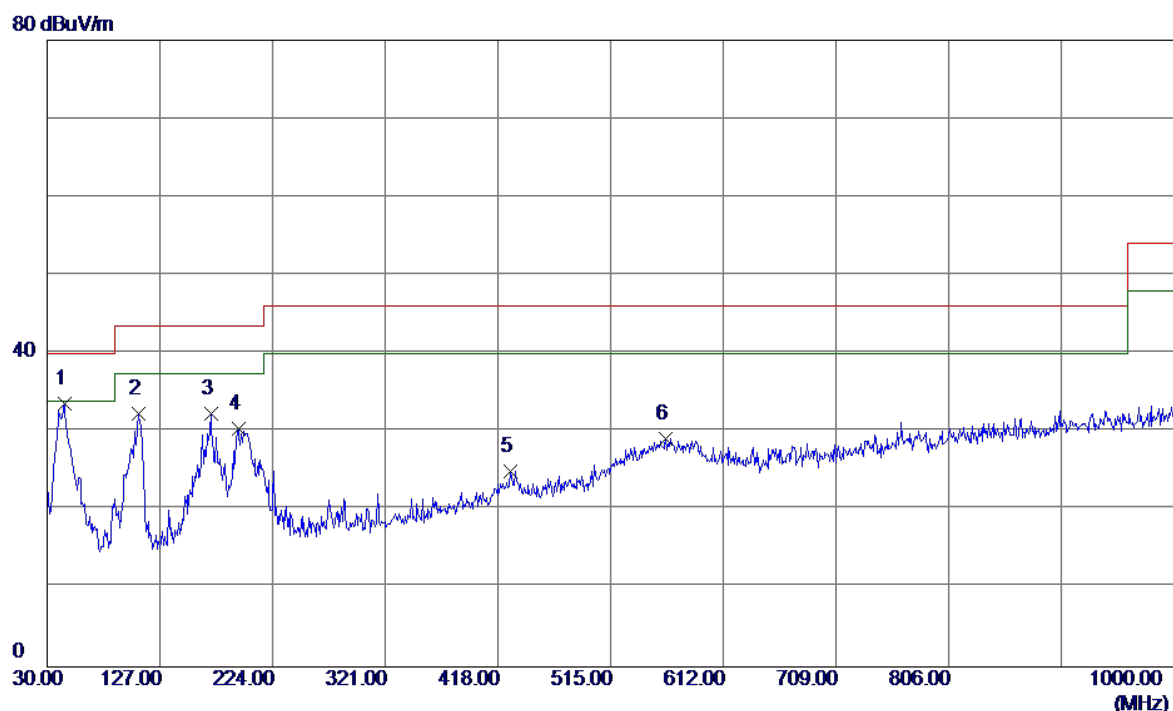

| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|
| 1 * | 45.0350      | 45.49                      | -11.85                  | 33.64                     | 40.00           | -6.36        | QP       |
| 2   | 108.5700     | 47.63                      | -15.38                  | 32.25                     | 43.50           | -11.25       | QP       |
| 3   | 171.1350     | 43.39                      | -11.13                  | 32.26                     | 43.50           | -11.24       | QP       |
| 4   | 194.4149     | 42.20                      | -11.77                  | 30.43                     | 43.50           | -13.07       | QP       |
| 5   | 429.1550     | 32.46                      | -7.49                   | 24.97                     | 46.00           | -21.03       | QP       |
| 6   | 562.5300     | 33.50                      | -4.34                   | 29.16                     | 46.00           | -16.84       | QP       |


|               |                                                                   |                   |            |
|---------------|-------------------------------------------------------------------|-------------------|------------|
| EUT           | Smart Phone                                                       | Model Name        | MHA-L29    |
| Temperature   | 25°C                                                              | Relative Humidity | 60%        |
| Test Voltage  | AC 120V/60Hz                                                      | Polarization      | Horizontal |
| Test Mode     | Adapter+Idle+BT+5G WIFI+GPS+Camera on+Earphone                    |                   |            |
| Note          | Adapter:Salcomp(US)+Honglin +Battery: Desay+ Earphone: Lianchuang |                   |            |
| Test Engineer | Kevin Li                                                          |                   |            |

80 dBuV/m

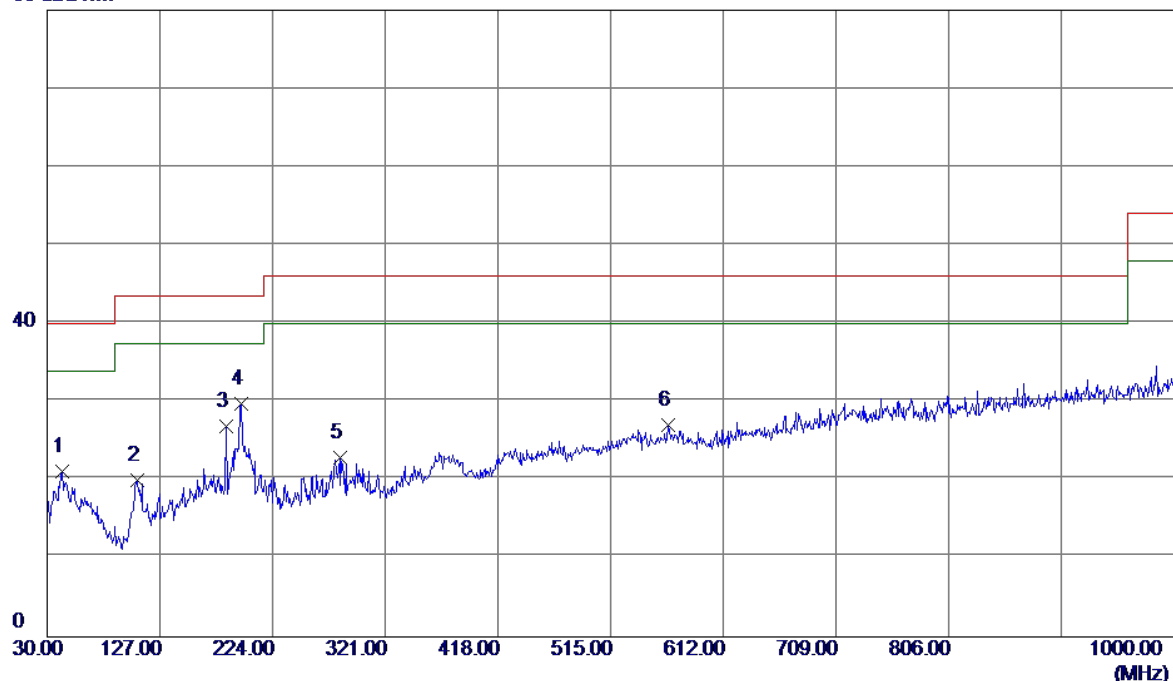


| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|
| 1   | 42.6100      | 33.37                      | -12.32                  | 21.05                     | 40.00           | -18.95       | QP       |
| 2   | 107.1150     | 35.62                      | -15.64                  | 19.98                     | 43.50           | -23.52       | QP       |
| 3   | 184.2300     | 38.26                      | -11.45                  | 26.81                     | 43.50           | -16.69       | QP       |
| 4 * | 196.8400     | 41.63                      | -11.93                  | 29.70                     | 43.50           | -13.80       | QP       |
| 5   | 281.7150     | 35.05                      | -12.13                  | 22.92                     | 46.00           | -23.08       | QP       |
| 6   | 564.9550     | 31.37                      | -4.30                   | 27.07                     | 46.00           | -18.93       | QP       |

|               |                                             |                   |          |
|---------------|---------------------------------------------|-------------------|----------|
| EUT           | Smart Phone                                 | Model Name        | MHA-L29  |
| Temperature   | 25°C                                        | Relative Humidity | 60%      |
| Test Voltage  | AC 120V/60Hz                                | Polarization      | Vertical |
| Test Mode     | Adapter+Idle+Playing+Speaker                |                   |          |
| Note          | Adapter:Salcomp(US)+Honglin +Battery: Desay |                   |          |
| Test Engineer | Kevin Li                                    |                   |          |

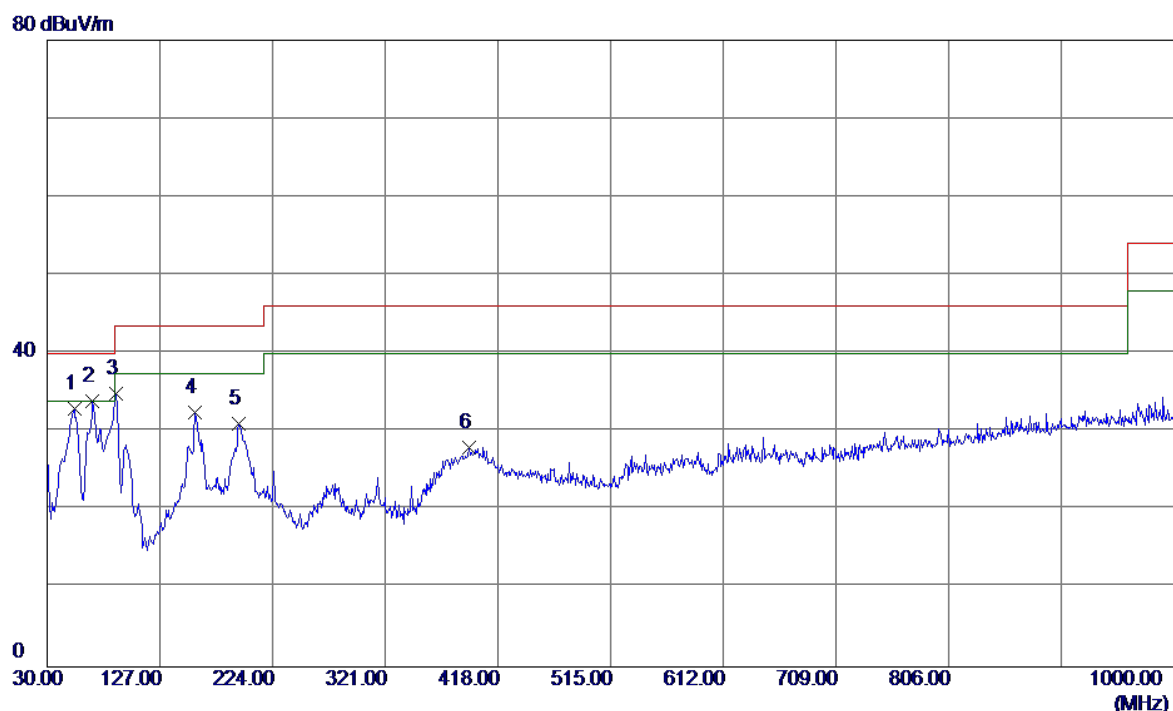


| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|
| 1   | 53.2800      | 44.75                      | -11.84                  | 32.91                     | 40.00           | -7.09        | QP       |
| 2 * | 69.2850      | 48.72                      | -14.73                  | 33.99                     | 40.00           | -6.01        | QP       |
| 3   | 89.1700      | 52.05                      | -17.22                  | 34.83                     | 43.50           | -8.67        | QP       |
| 4   | 157.0700     | 44.17                      | -11.67                  | 32.50                     | 43.50           | -11.00       | QP       |
| 5   | 195.3850     | 42.83                      | -11.83                  | 31.00                     | 43.50           | -12.50       | QP       |
| 6   | 393.2650     | 36.40                      | -8.38                   | 28.02                     | 46.00           | -17.98       | QP       |

|               |                                             |                   |            |
|---------------|---------------------------------------------|-------------------|------------|
| EUT           | Smart Phone                                 | Model Name        | MHA-L29    |
| Temperature   | 25°C                                        | Relative Humidity | 60%        |
| Test Voltage  | AC 120V/60Hz                                | Polarization      | Horizontal |
| Test Mode     | Adapter+Idle+Playing+Speaker                |                   |            |
| Note          | Adapter:Salcomp(US)+Honglin +Battery: Desay |                   |            |
| Test Engineer | Kevin Li                                    |                   |            |

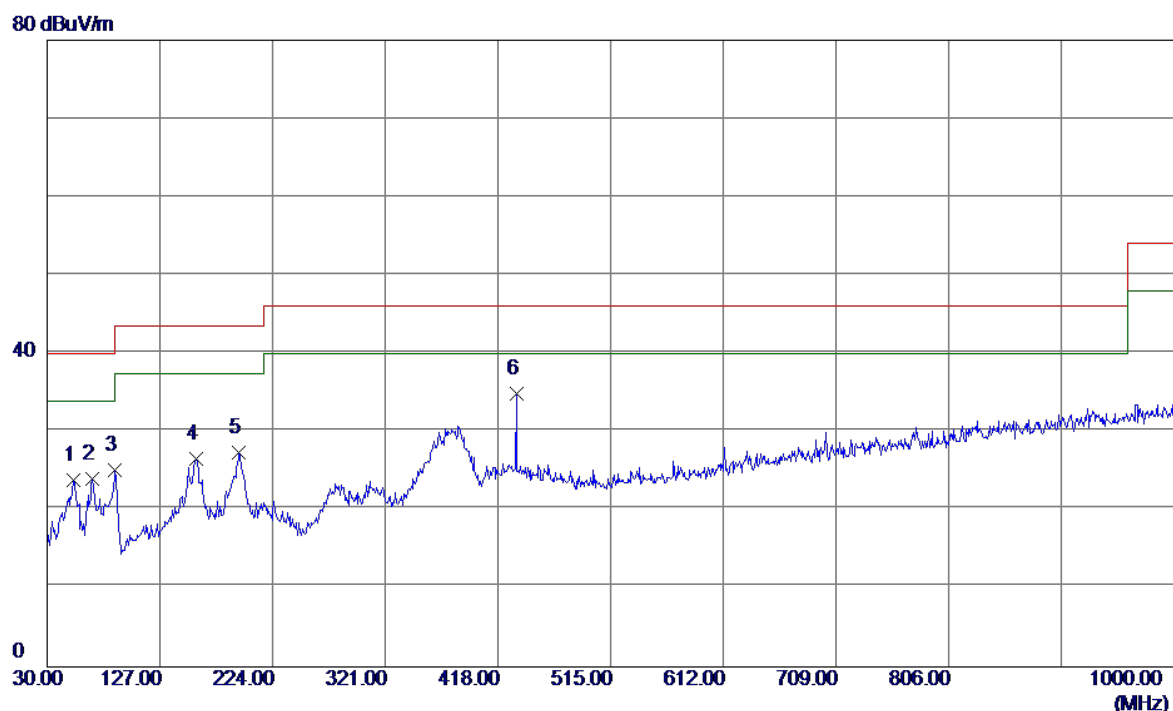

| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|
| 1   | 52.7950      | 35.52                      | -11.74                  | 23.78                     | 40.00           | -16.22       | QP       |
| 2   | 68.8000      | 38.58                      | -14.62                  | 23.96                     | 40.00           | -16.04       | QP       |
| 3   | 88.2000      | 42.34                      | -17.17                  | 25.17                     | 43.50           | -18.33       | QP       |
| 4   | 158.0399     | 38.13                      | -11.63                  | 26.50                     | 43.50           | -17.00       | QP       |
| 5   | 195.3850     | 39.26                      | -11.83                  | 27.43                     | 43.50           | -16.07       | QP       |
| 6 * | 434.0050     | 42.31                      | -7.37                   | 34.94                     | 46.00           | -11.06       | QP       |


|               |                                                                   |                   |          |
|---------------|-------------------------------------------------------------------|-------------------|----------|
| EUT           | Smart Phone                                                       | Model Name        | MHA-L29  |
| Temperature   | 25°C                                                              | Relative Humidity | 60%      |
| Test Voltage  | AC 120V/60Hz                                                      | Polarization      | Vertical |
| Test Mode     | Adapter+Traffic (GSM)+ Earphone                                   |                   |          |
| Note          | Adapter:Salcomp(US)+Honglin +Battery: Desay+ Earphone: Lianchuang |                   |          |
| Test Engineer | Kevin Li                                                          |                   |          |

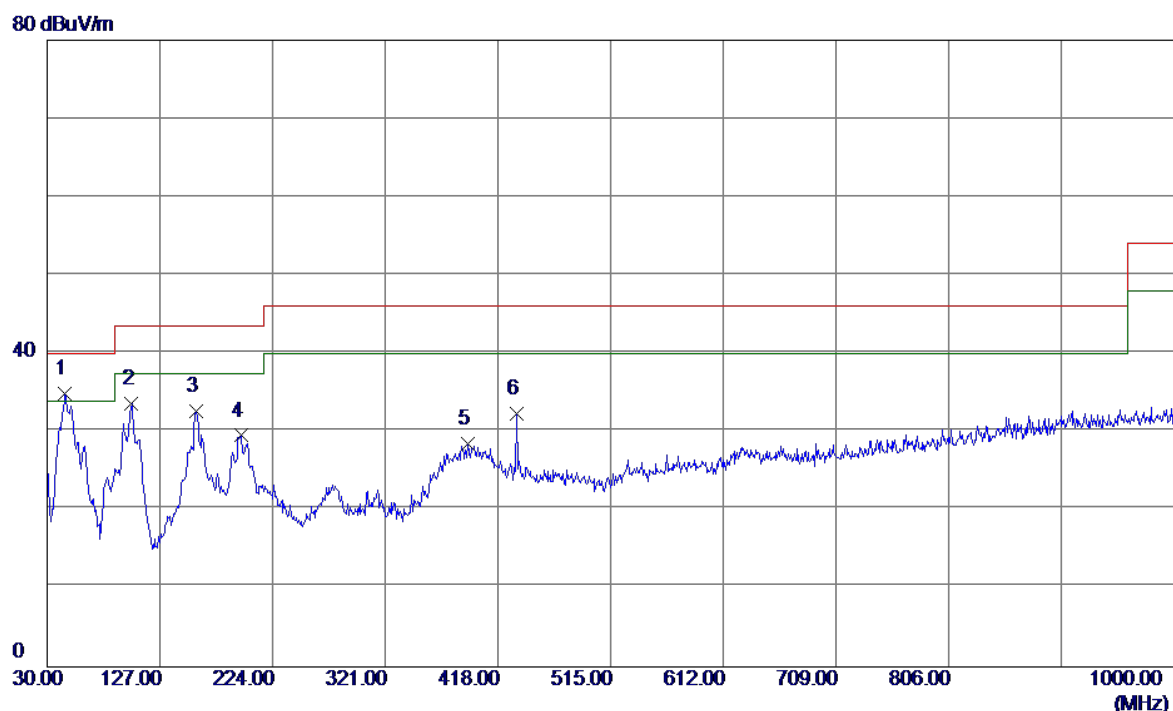

| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|
| 1 * | 45.5200      | 46.63                      | -11.80                  | 34.83                     | 40.00           | -5.17        | QP       |
| 2   | 102.7500     | 49.97                      | -16.41                  | 33.56                     | 43.50           | -9.94        | QP       |
| 3   | 158.5250     | 44.23                      | -11.60                  | 32.63                     | 43.50           | -10.87       | QP       |
| 4   | 196.8400     | 41.45                      | -11.93                  | 29.52                     | 43.50           | -13.98       | QP       |
| 5   | 392.2950     | 36.91                      | -8.41                   | 28.50                     | 46.00           | -17.50       | QP       |
| 6   | 434.0050     | 39.75                      | -7.37                   | 32.38                     | 46.00           | -13.62       | QP       |


|               |                                                                   |                   |            |
|---------------|-------------------------------------------------------------------|-------------------|------------|
| EUT           | Smart Phone                                                       | Model Name        | MHA-L29    |
| Temperature   | 25°C                                                              | Relative Humidity | 60%        |
| Test Voltage  | AC 120V/60Hz                                                      | Polarization      | Horizontal |
| Test Mode     | Adapter+Traffic (GSM)+ Earphone                                   |                   |            |
| Note          | Adapter:Salcomp(US)+Honglin +Battery: Desay+ Earphone: Lianchuang |                   |            |
| Test Engineer | Kevin Li                                                          |                   |            |

80 dBuV/m

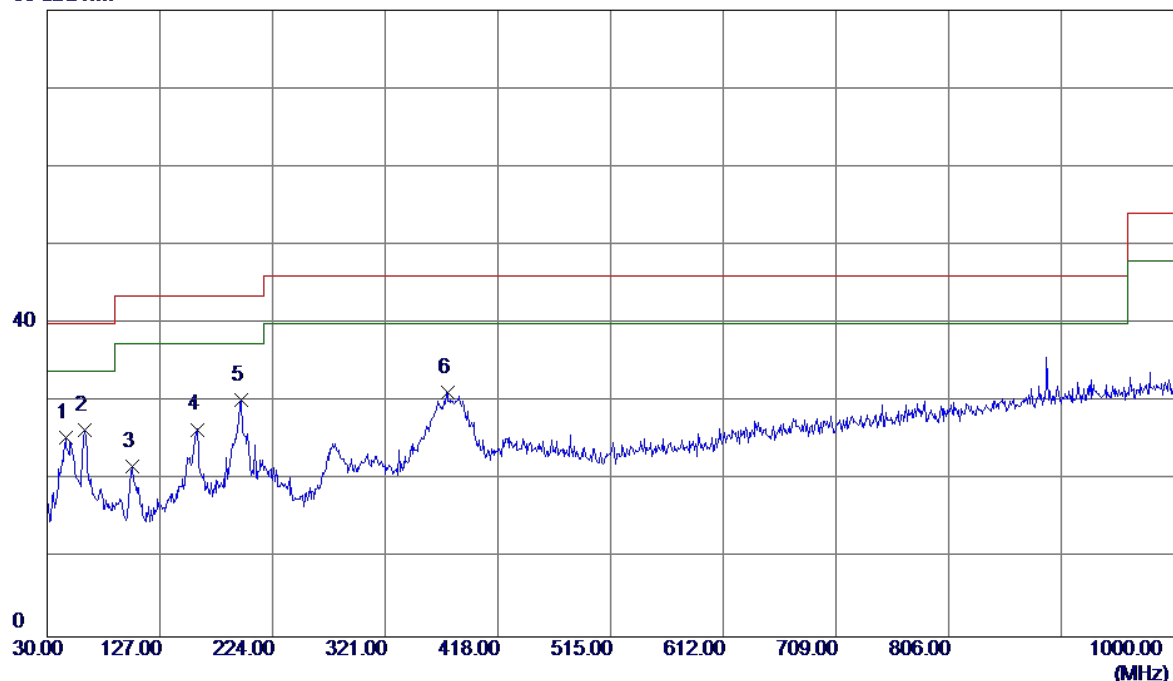


| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|
| 1   | 46.0050      | 37.20                      | -11.74                  | 25.46                     | 40.00           | -14.54       | QP       |
| 2   | 62.0100      | 39.79                      | -13.41                  | 26.38                     | 40.00           | -13.62       | QP       |
| 3   | 103.7200     | 37.99                      | -16.24                  | 21.75                     | 43.50           | -21.75       | QP       |
| 4   | 159.0100     | 38.06                      | -11.58                  | 26.48                     | 43.50           | -17.02       | QP       |
| 5 * | 196.8400     | 42.24                      | -11.93                  | 30.31                     | 43.50           | -13.19       | QP       |
| 6   | 374.8350     | 40.10                      | -8.85                   | 31.25                     | 46.00           | -14.75       | QP       |

|               |                                             |                   |          |
|---------------|---------------------------------------------|-------------------|----------|
| EUT           | Smart Phone                                 | Model Name        | MHA-L29  |
| Temperature   | 25°C                                        | Relative Humidity | 60%      |
| Test Voltage  | AC 120V/60Hz                                | Polarization      | Vertical |
| Test Mode     | Adapter+Traffic (WCDMA)                     |                   |          |
| Note          | Adapter:Salcomp(US)+Honglin +Battery: Desay |                   |          |
| Test Engineer | Kevin Li                                    |                   |          |

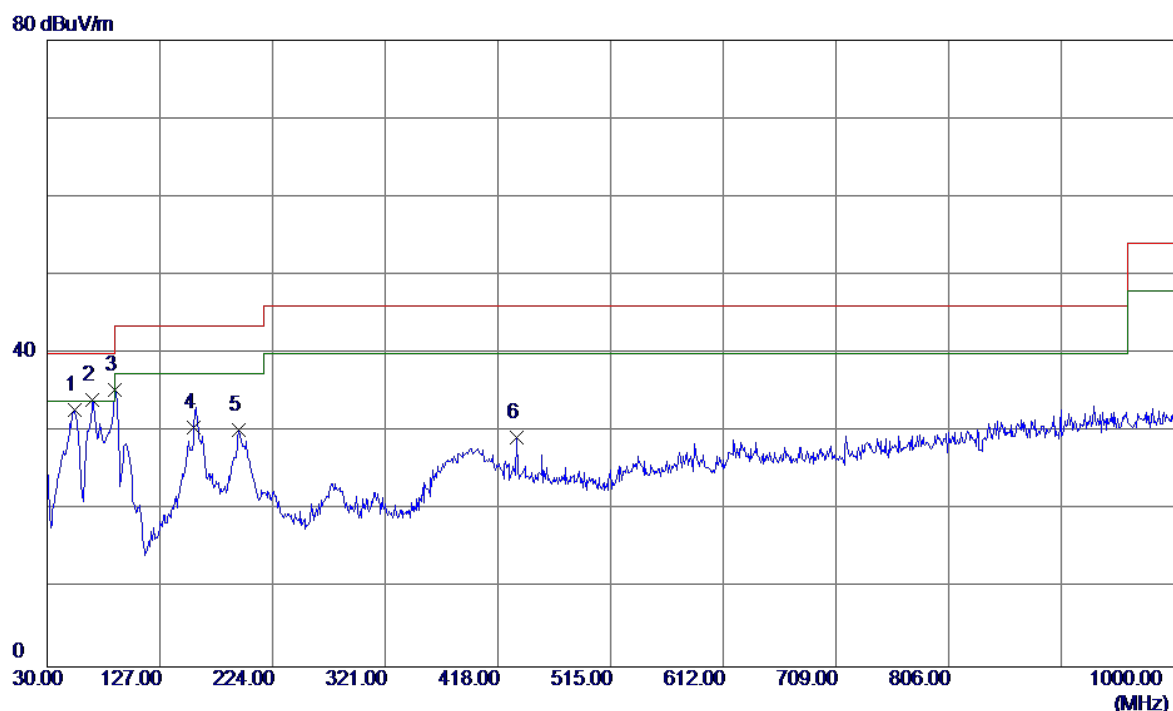


| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|
| 1   | 53.7650      | 44.79                      | -11.93                  | 32.86                     | 40.00           | -7.14        | QP       |
| 2 * | 69.2850      | 48.86                      | -14.73                  | 34.13                     | 40.00           | -5.87        | QP       |
| 3   | 88.6850      | 52.55                      | -17.19                  | 35.36                     | 43.50           | -8.14        | QP       |
| 4   | 156.5850     | 42.30                      | -11.69                  | 30.61                     | 43.50           | -12.89       | QP       |
| 5   | 195.3850     | 42.12                      | -11.83                  | 30.29                     | 43.50           | -13.21       | QP       |
| 6   | 434.0050     | 36.60                      | -7.37                   | 29.23                     | 46.00           | -16.77       | QP       |

|               |                                             |                   |            |
|---------------|---------------------------------------------|-------------------|------------|
| EUT           | Smart Phone                                 | Model Name        | MHA-L29    |
| Temperature   | 25°C                                        | Relative Humidity | 60%        |
| Test Voltage  | AC 120V/60Hz                                | Polarization      | Horizontal |
| Test Mode     | Adapter+Traffic (WCDMA)                     |                   |            |
| Note          | Adapter:Salcomp(US)+Honglin +Battery: Desay |                   |            |
| Test Engineer | Kevin Li                                    |                   |            |

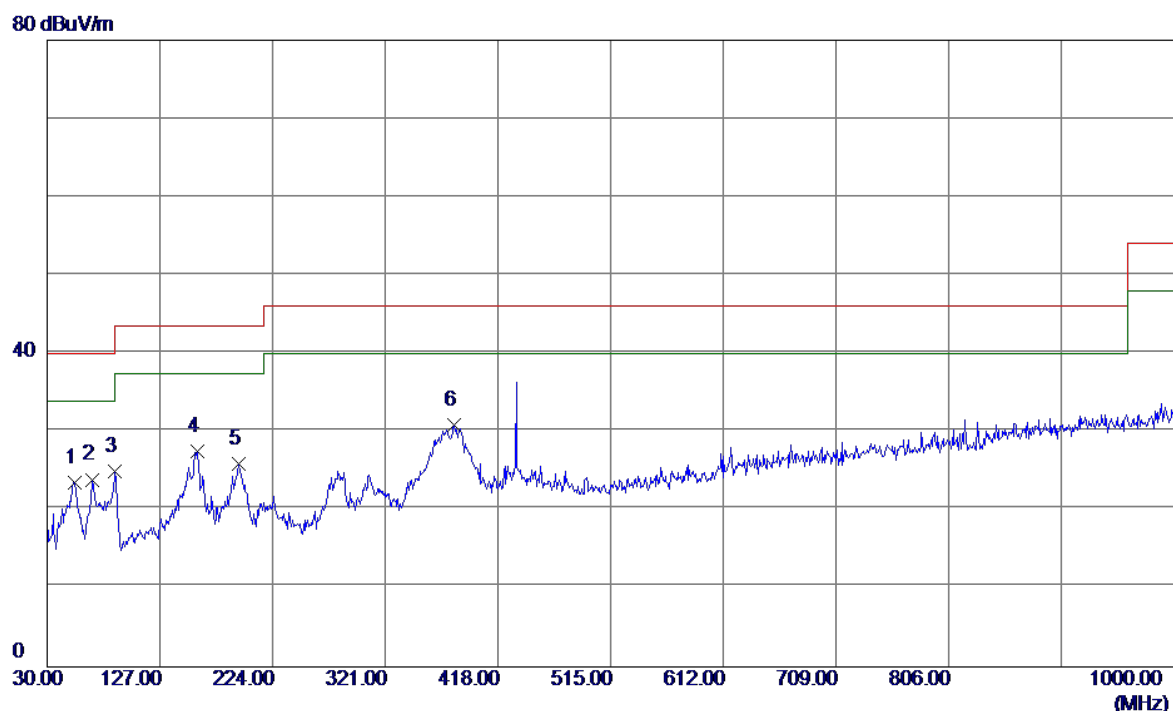

| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|
| 1   | 53.7650      | 35.48                      | -11.93                  | 23.55                     | 40.00           | -16.45       | QP       |
| 2   | 68.3150      | 38.44                      | -14.52                  | 23.92                     | 40.00           | -16.08       | QP       |
| 3   | 88.6850      | 42.17                      | -17.19                  | 24.98                     | 43.50           | -18.52       | QP       |
| 4   | 159.0100     | 39.03                      | -11.58                  | 27.45                     | 43.50           | -16.05       | QP       |
| 5   | 194.4149     | 37.64                      | -11.77                  | 25.87                     | 43.50           | -17.63       | QP       |
| 6 * | 380.1700     | 39.61                      | -8.71                   | 30.90                     | 46.00           | -15.10       | QP       |


|               |                                             |                   |          |
|---------------|---------------------------------------------|-------------------|----------|
| EUT           | Smart Phone                                 | Model Name        | MHA-L29  |
| Temperature   | 25°C                                        | Relative Humidity | 60%      |
| Test Voltage  | AC 120V/60Hz                                | Polarization      | Vertical |
| Test Mode     | Adapter+Traffic (LTE)                       |                   |          |
| Note          | Adapter:Salcomp(US)+Honglin +Battery: Desay |                   |          |
| Test Engineer | Kevin Li                                    |                   |          |

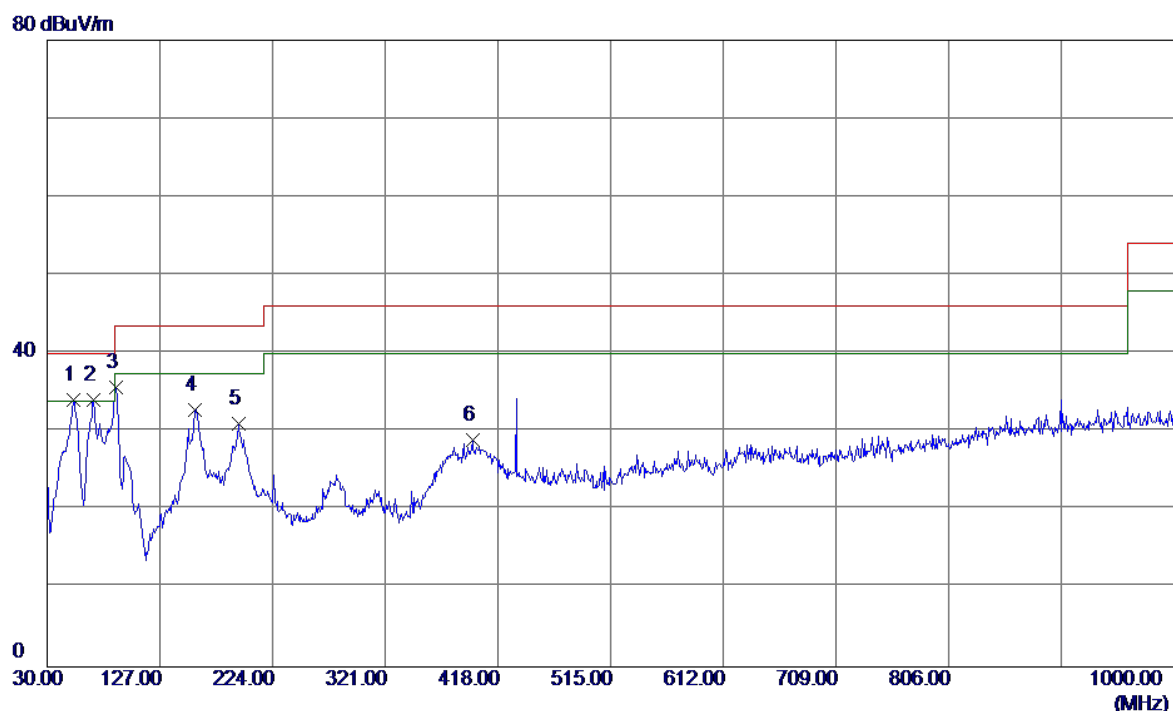

| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|
| 1   | 52.7950      | 45.75                      | -11.74                  | 34.01                     | 40.00           | -5.99        | QP       |
| 2 * | 69.7699      | 48.98                      | -14.83                  | 34.15                     | 40.00           | -5.85        | QP       |
| 3   | 89.1700      | 52.86                      | -17.22                  | 35.64                     | 43.50           | -7.86        | QP       |
| 4   | 157.0700     | 44.46                      | -11.67                  | 32.79                     | 43.50           | -10.71       | QP       |
| 5   | 194.4149     | 42.85                      | -11.77                  | 31.08                     | 43.50           | -12.42       | QP       |
| 6   | 396.1750     | 37.23                      | -8.31                   | 28.92                     | 46.00           | -17.08       | QP       |

|               |                                             |                   |            |
|---------------|---------------------------------------------|-------------------|------------|
| EUT           | Smart Phone                                 | Model Name        | MHA-L29    |
| Temperature   | 25°C                                        | Relative Humidity | 60%        |
| Test Voltage  | AC 120V/60Hz                                | Polarization      | Horizontal |
| Test Mode     | Adapter+Traffic (LTE)                       |                   |            |
| Note          | Adapter:Salcomp(US)+Honglin +Battery: Desay |                   |            |
| Test Engineer | Kevin Li                                    |                   |            |

80 dBuV/m

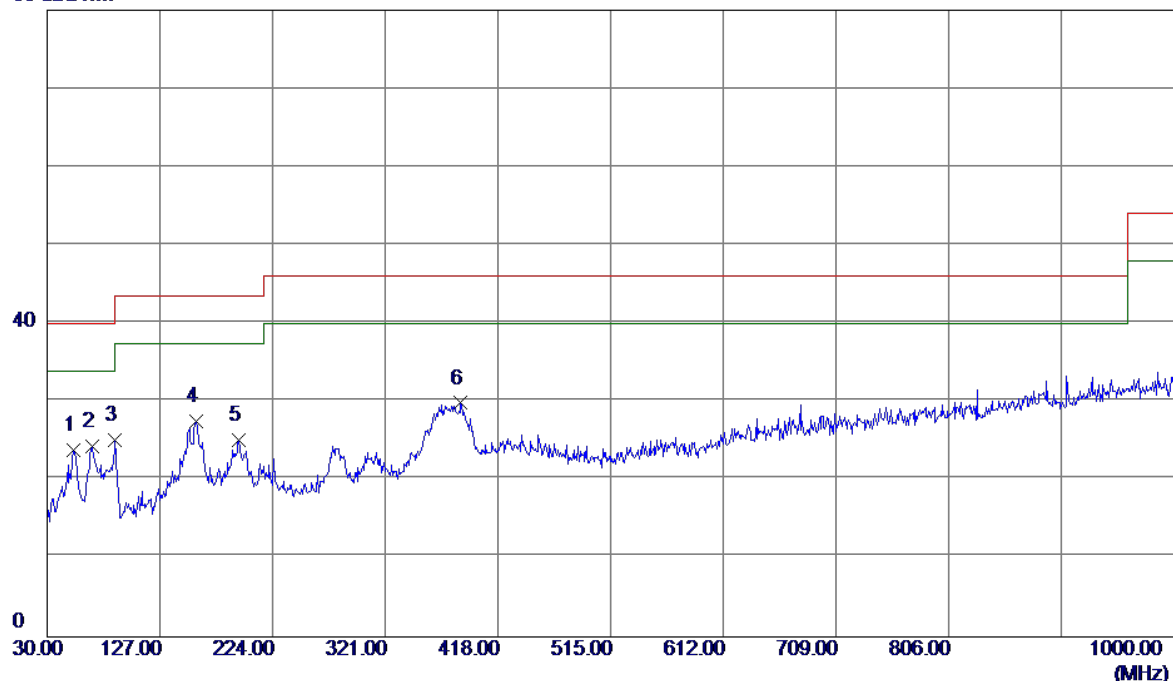

| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|
| 1   | 52.7950      | 35.64                      | -11.74                  | 23.90                     | 40.00           | -16.10       | QP       |
| 2 * | 68.3150      | 38.77                      | -14.52                  | 24.25                     | 40.00           | -15.75       | QP       |
| 3   | 88.2000      | 42.34                      | -17.17                  | 25.17                     | 43.50           | -18.33       | QP       |
| 4   | 158.0399     | 39.18                      | -11.63                  | 27.55                     | 43.50           | -15.95       | QP       |
| 5   | 195.3850     | 36.89                      | -11.83                  | 25.06                     | 43.50           | -18.44       | QP       |
| 6   | 385.9900     | 38.41                      | -8.57                   | 29.84                     | 46.00           | -16.16       | QP       |


#### 4.2.7 TEST RESULTS-ABOVE 1GHZ

Remark :

- (1) All readings are Peak unless otherwise stated QP in column of『Note』. Peak denotes that the Peak reading compliance with the QP Limits and then QP Mode measurement didn't perform.
- (2) Radiated emissions measured in frequency range above 1000MHz were made with an instrument using Peak detector mode and AV detector mode of the emission.
- (3) Data of measurement within this frequency range shown “ \* ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (4) A preamp and high pass filter were used for this test in order to provide sufficient measurement sensitivity.

|               |                                                          |                   |          |
|---------------|----------------------------------------------------------|-------------------|----------|
| EUT           | Smart Phone                                              | Model Name        | MHA-L29  |
| Temperature   | 25°C                                                     | Relative Humidity | 60%      |
| Test Voltage  | AC 120V/60Hz                                             | Polarization      | Vertical |
| Test Mode     | USB copy(EUT with PC)+Idle+ Earphone                     |                   |          |
| Note          | USB Cable: Honglin +Battery: Desay+ Earphone: Lianchuang |                   |          |
| Test Engineer | Kevin Li                                                 |                   |          |


80 dBuV/m

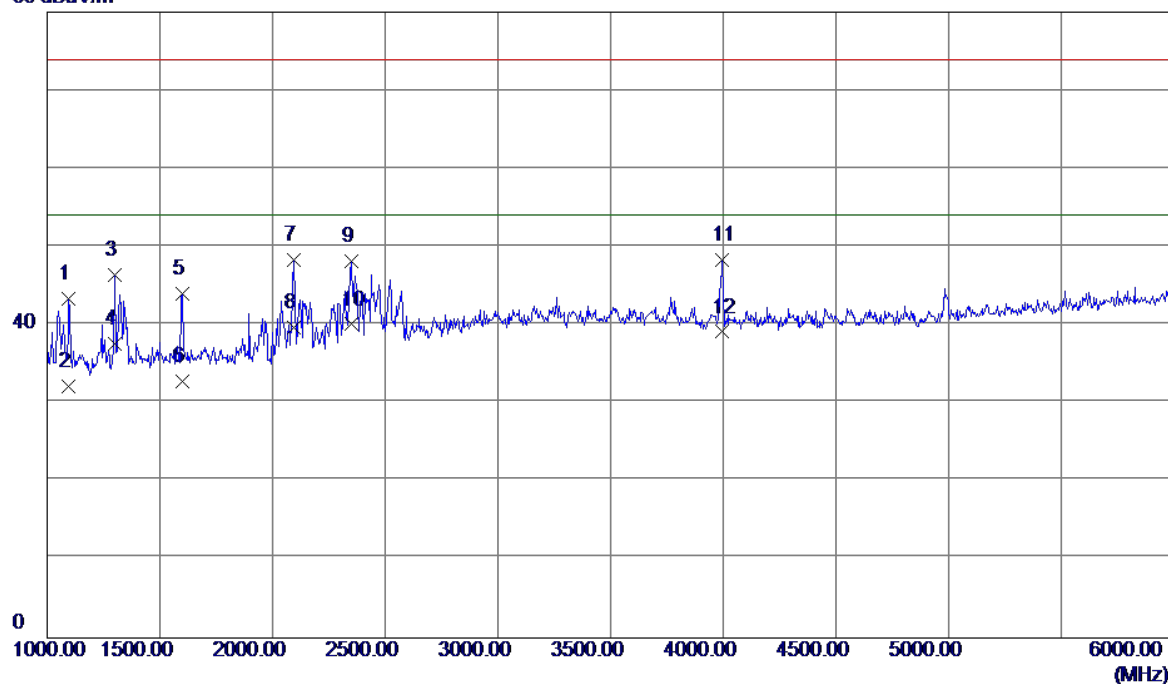

| No.  | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector |
|------|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|
| 1    | 1095.0000    | 48.38                      | -5.08                   | 43.30                     | 74.00           | -30.70       | Peak     |
| 2    | 1095.0000    | 37.23                      | -5.08                   | 32.15                     | 54.00           | -21.85       | AVG      |
| 3    | 1300.0000    | 50.64                      | -4.23                   | 46.41                     | 74.00           | -27.59       | Peak     |
| 4    | 1300.0000    | 41.85                      | -4.23                   | 37.62                     | 54.00           | -16.38       | AVG      |
| 5    | 1600.0000    | 46.95                      | -3.02                   | 43.93                     | 74.00           | -30.07       | Peak     |
| 6    | 1600.0000    | 35.84                      | -3.02                   | 32.82                     | 54.00           | -21.18       | AVG      |
| 7    | 2095.0000    | 49.29                      | -1.01                   | 48.28                     | 74.00           | -25.72       | Peak     |
| 8    | 2095.0000    | 40.67                      | -1.01                   | 39.66                     | 54.00           | -14.34       | AVG      |
| 9    | 2347.5000    | 47.76                      | 0.34                    | 48.10                     | 74.00           | -25.90       | Peak     |
| 10 * | 2347.5000    | 39.74                      | 0.34                    | 40.08                     | 54.00           | -13.92       | AVG      |
| 11   | 3995.0000    | 42.69                      | 5.61                    | 48.30                     | 74.00           | -25.70       | Peak     |
| 12   | 3995.0000    | 33.51                      | 5.61                    | 39.12                     | 54.00           | -14.88       | AVG      |

|               |                                                          |                   |            |
|---------------|----------------------------------------------------------|-------------------|------------|
| EUT           | Smart Phone                                              | Model Name        | MHA-L29    |
| Temperature   | 25°C                                                     | Relative Humidity | 60%        |
| Test Voltage  | AC 120V/60Hz                                             | Polarization      | Horizontal |
| Test Mode     | USB copy(EUT with PC)+Idle+ Earphone                     |                   |            |
| Note          | USB Cable: Honglin +Battery: Desay+ Earphone: Lianchuang |                   |            |
| Test Engineer | Kevin Li                                                 |                   |            |


80 dBuV/m

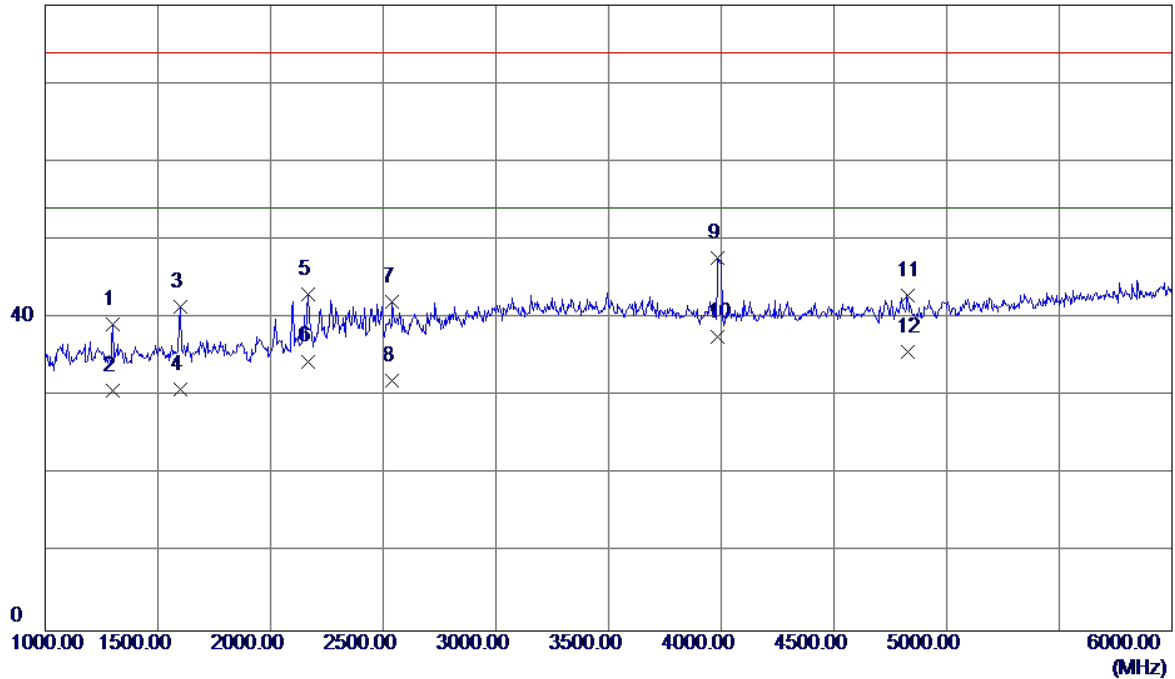

| No.  | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector |
|------|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|
| 1    | 1300.0000    | 43.37                      | -4.23                   | 39.14                     | 74.00           | -34.86       | Peak     |
| 2    | 1300.0000    | 34.90                      | -4.23                   | 30.67                     | 54.00           | -23.33       | AVG      |
| 3    | 1597.5000    | 44.48                      | -3.03                   | 41.45                     | 74.00           | -32.55       | Peak     |
| 4    | 1597.5000    | 33.84                      | -3.03                   | 30.81                     | 54.00           | -23.19       | AVG      |
| 5    | 2165.0000    | 43.61                      | -0.64                   | 42.97                     | 74.00           | -31.03       | Peak     |
| 6    | 2165.0000    | 35.12                      | -0.64                   | 34.48                     | 54.00           | -19.52       | AVG      |
| 7    | 2540.0000    | 40.72                      | 1.39                    | 42.11                     | 74.00           | -31.89       | Peak     |
| 8    | 2540.0000    | 30.56                      | 1.39                    | 31.95                     | 54.00           | -22.05       | AVG      |
| 9    | 3985.0000    | 42.06                      | 5.60                    | 47.66                     | 74.00           | -26.34       | Peak     |
| 10 * | 3985.0000    | 31.95                      | 5.60                    | 37.55                     | 54.00           | -16.45       | AVG      |
| 11   | 4825.0000    | 35.80                      | 7.07                    | 42.87                     | 74.00           | -31.13       | Peak     |
| 12   | 4825.0000    | 28.66                      | 7.07                    | 35.73                     | 54.00           | -18.27       | AVG      |

|               |                                                           |                   |          |
|---------------|-----------------------------------------------------------|-------------------|----------|
| EUT           | Smart Phone                                               | Model Name        | MHA-L29  |
| Temperature   | 25°C                                                      | Relative Humidity | 60%      |
| Test Voltage  | AC 120V/60Hz                                              | Polarization      | Vertical |
| Test Mode     | USB copy(EUT with PC)+Idle+ Earphone                      |                   |          |
| Note          | USB Cable: CONNREX +Battery: Sunwoda+ Earphone: QUANCHENG |                   |          |
| Test Engineer | Kevin Li                                                  |                   |          |


80 dBuV/m

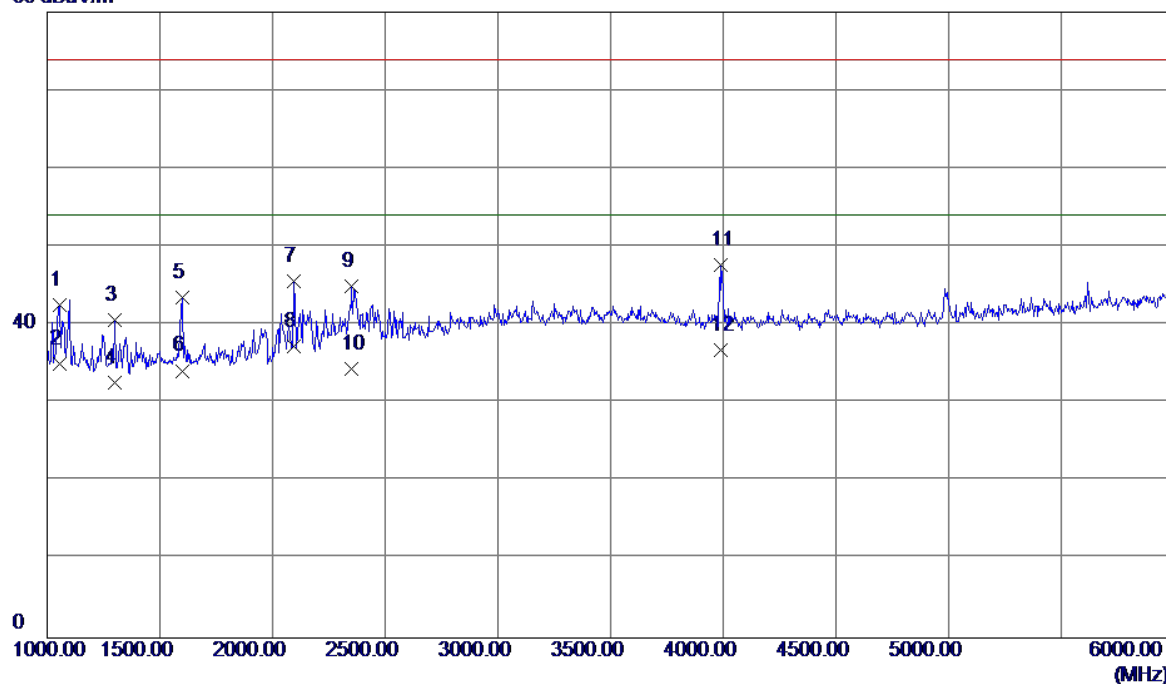

| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|
| 1   | 1055.0000    | 47.78                      | -5.25                   | 42.53                     | 74.00           | -31.47       | Peak     |
| 2   | 1055.0000    | 40.26                      | -5.25                   | 35.01                     | 54.00           | -18.99       | AVG      |
| 3   | 1300.0000    | 44.86                      | -4.23                   | 40.63                     | 74.00           | -33.37       | Peak     |
| 4   | 1300.0000    | 36.92                      | -4.23                   | 32.69                     | 54.00           | -21.31       | AVG      |
| 5   | 1597.5000    | 46.57                      | -3.03                   | 43.54                     | 74.00           | -30.46       | Peak     |
| 6   | 1597.5000    | 37.19                      | -3.03                   | 34.16                     | 54.00           | -19.84       | AVG      |
| 7   | 2095.0000    | 46.64                      | -1.01                   | 45.63                     | 74.00           | -28.37       | Peak     |
| 8 * | 2095.0000    | 38.29                      | -1.01                   | 37.28                     | 54.00           | -16.72       | AVG      |
| 9   | 2352.0000    | 44.57                      | 0.37                    | 44.94                     | 74.00           | -29.06       | Peak     |
| 10  | 2352.0000    | 33.97                      | 0.37                    | 34.34                     | 54.00           | -19.66       | AVG      |
| 11  | 3990.0000    | 42.07                      | 5.61                    | 47.68                     | 74.00           | -26.32       | Peak     |
| 12  | 3990.0000    | 31.19                      | 5.61                    | 36.80                     | 54.00           | -17.20       | AVG      |


|               |                                                           |                   |            |
|---------------|-----------------------------------------------------------|-------------------|------------|
| EUT           | Smart Phone                                               | Model Name        | MHA-L29    |
| Temperature   | 25°C                                                      | Relative Humidity | 60%        |
| Test Voltage  | AC 120V/60Hz                                              | Polarization      | Horizontal |
| Test Mode     | USB copy(EUT with PC)+Idle+ Earphone                      |                   |            |
| Note          | USB Cable: CONNREX +Battery: Sunwoda+ Earphone: QUANCHENG |                   |            |
| Test Engineer | Kevin Li                                                  |                   |            |

80 dBuV/m

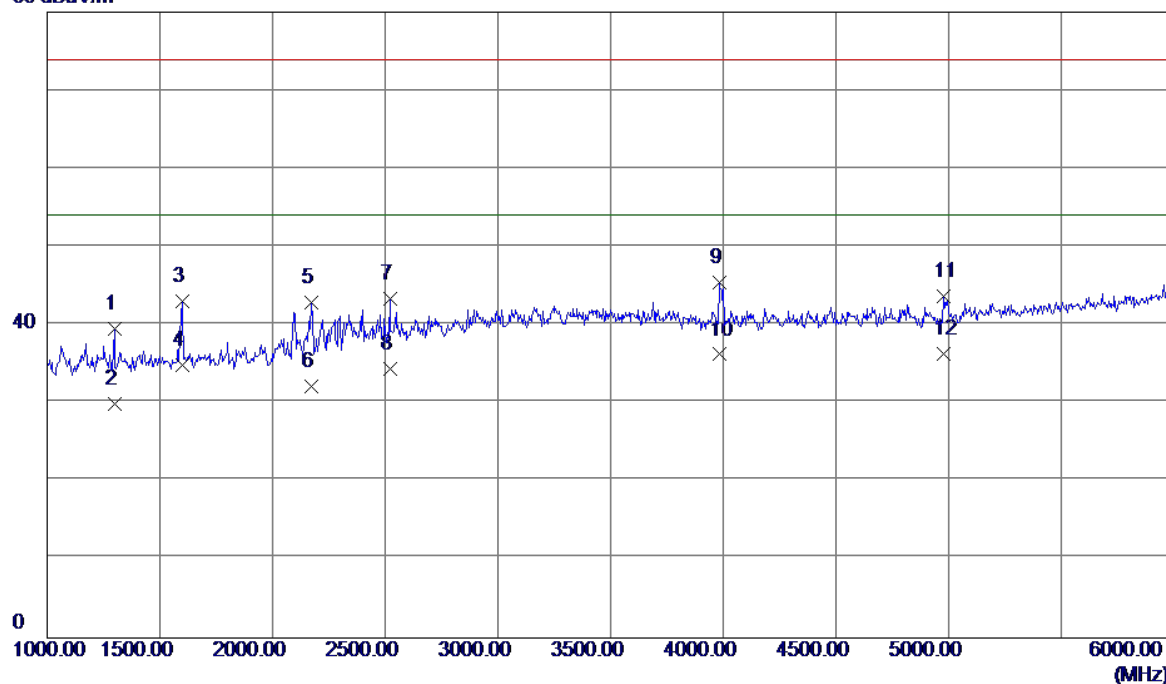

| No.  | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector |
|------|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|
| 1    | 1297.5000    | 43.70                      | -4.24                   | 39.46                     | 74.00           | -34.54       | Peak     |
| 2    | 1297.5000    | 34.13                      | -4.24                   | 29.89                     | 54.00           | -24.11       | AVG      |
| 3    | 1597.5000    | 46.13                      | -3.03                   | 43.10                     | 74.00           | -30.90       | Peak     |
| 4    | 1597.5000    | 37.95                      | -3.03                   | 34.92                     | 54.00           | -19.08       | AVG      |
| 5    | 2170.0000    | 43.45                      | -0.61                   | 42.84                     | 74.00           | -31.16       | Peak     |
| 6    | 2170.0000    | 32.84                      | -0.61                   | 32.23                     | 54.00           | -21.77       | AVG      |
| 7    | 2520.0000    | 42.03                      | 1.27                    | 43.30                     | 74.00           | -30.70       | Peak     |
| 8    | 2520.0000    | 33.18                      | 1.27                    | 34.45                     | 54.00           | -19.55       | AVG      |
| 9    | 3982.5000    | 39.84                      | 5.60                    | 45.44                     | 74.00           | -28.56       | Peak     |
| 10   | 3982.5000    | 30.64                      | 5.60                    | 36.24                     | 54.00           | -17.76       | AVG      |
| 11   | 4977.5000    | 36.31                      | 7.35                    | 43.66                     | 74.00           | -30.34       | Peak     |
| 12 * | 4977.5000    | 28.99                      | 7.35                    | 36.34                     | 54.00           | -17.66       | AVG      |


|               |                                                             |                   |          |
|---------------|-------------------------------------------------------------|-------------------|----------|
| EUT           | Smart Phone                                                 | Model Name        | MHA-L29  |
| Temperature   | 25°C                                                        | Relative Humidity | 60%      |
| Test Voltage  | AC 120V/60Hz                                                | Polarization      | Vertical |
| Test Mode     | USB copy(EUT with PC)+Idle+ Earphone                        |                   |          |
| Note          | USB Cable: LUXSHAREICT +Battery: SCUD+ Earphone: Lianchuang |                   |          |
| Test Engineer | Kevin Li                                                    |                   |          |

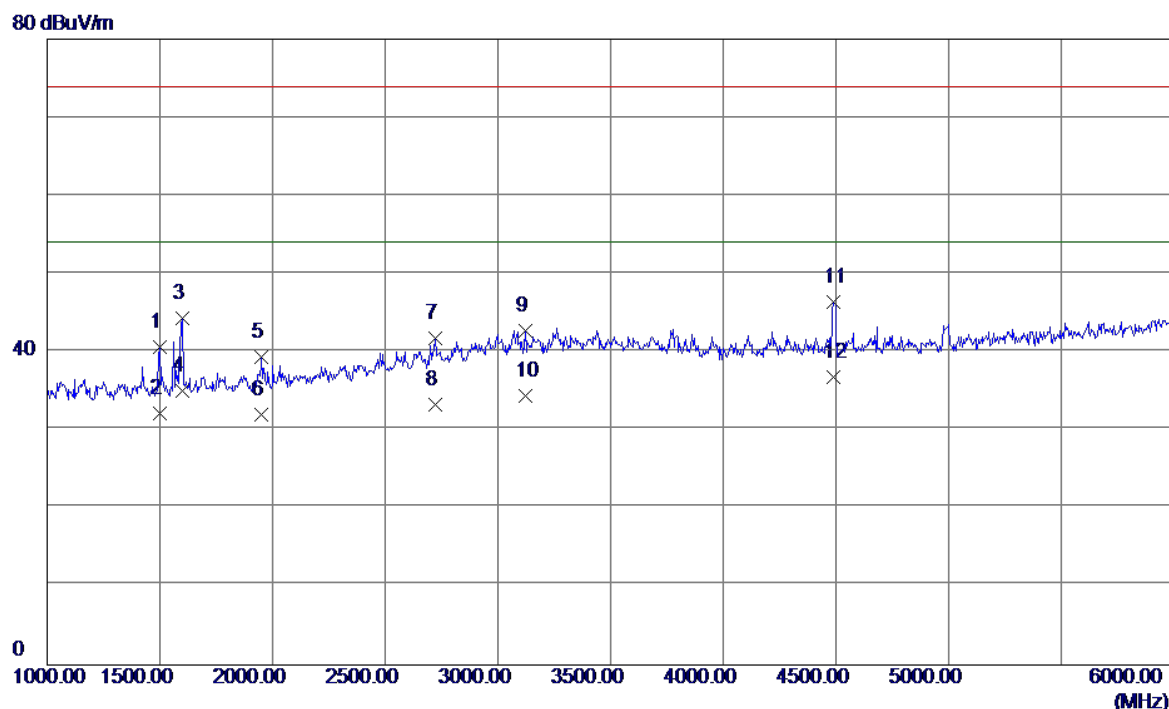

| No.  | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector |
|------|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|
| 1    | 1500.0000    | 43.97                      | -3.40                   | 40.57                     | 74.00           | -33.43       | Peak     |
| 2    | 1500.0000    | 35.62                      | -3.40                   | 32.22                     | 54.00           | -21.78       | AVG      |
| 3    | 1600.0000    | 47.29                      | -3.02                   | 44.27                     | 74.00           | -29.73       | Peak     |
| 4    | 1600.0000    | 38.10                      | -3.02                   | 35.08                     | 54.00           | -18.92       | AVG      |
| 5    | 1950.0000    | 41.14                      | -1.71                   | 39.43                     | 74.00           | -34.57       | Peak     |
| 6    | 1950.0000    | 33.64                      | -1.71                   | 31.93                     | 54.00           | -22.07       | AVG      |
| 7    | 2722.5000    | 39.31                      | 2.48                    | 41.79                     | 74.00           | -32.21       | Peak     |
| 8    | 2722.5000    | 30.76                      | 2.48                    | 33.24                     | 54.00           | -20.76       | AVG      |
| 9    | 3122.5000    | 38.31                      | 4.46                    | 42.77                     | 74.00           | -31.23       | Peak     |
| 10   | 3122.5000    | 29.94                      | 4.46                    | 34.40                     | 54.00           | -19.60       | AVG      |
| 11   | 4490.0000    | 39.98                      | 6.47                    | 46.45                     | 74.00           | -27.55       | Peak     |
| 12 * | 4490.0000    | 30.32                      | 6.47                    | 36.79                     | 54.00           | -17.21       | AVG      |


|               |                                                             |                   |            |
|---------------|-------------------------------------------------------------|-------------------|------------|
| EUT           | Smart Phone                                                 | Model Name        | MHA-L29    |
| Temperature   | 25°C                                                        | Relative Humidity | 60%        |
| Test Voltage  | AC 120V/60Hz                                                | Polarization      | Horizontal |
| Test Mode     | USB copy(EUT with PC)+Idle+ Earphone                        |                   |            |
| Note          | USB Cable: LUXSHAREICT +Battery: SCUD+ Earphone: Lianchuang |                   |            |
| Test Engineer | Kevin Li                                                    |                   |            |

80 dBuV/m

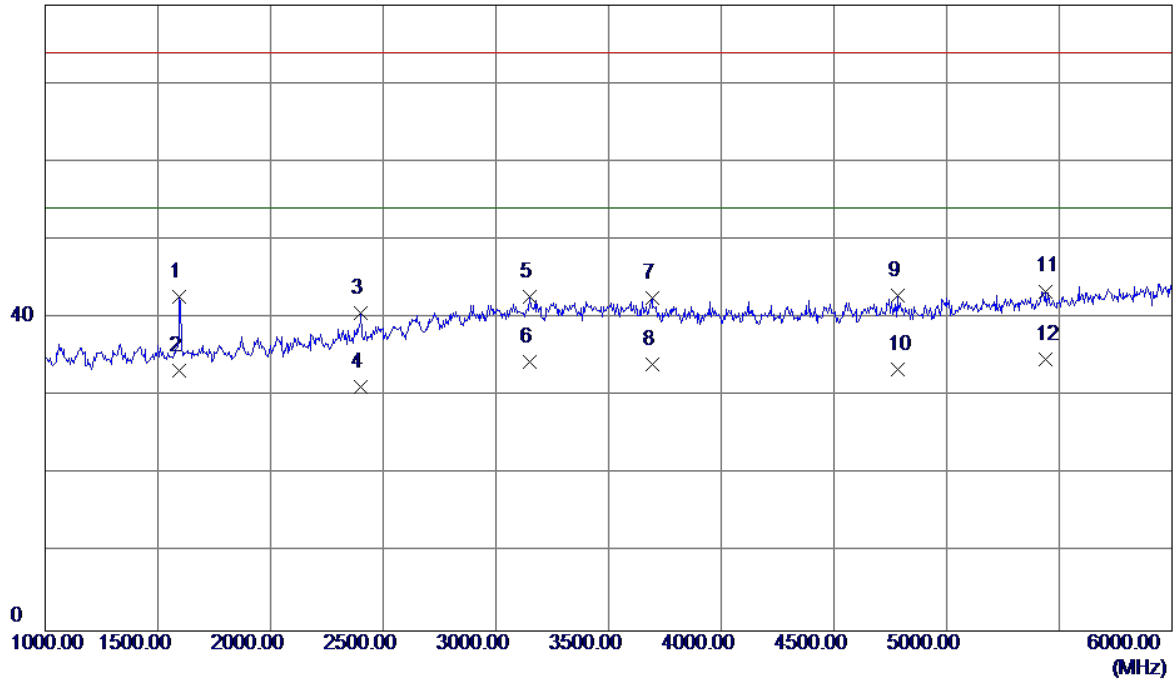


| No.  | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector |
|------|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|
| 1    | 1595.0000    | 45.71                      | -3.04                   | 42.67                     | 74.00           | -31.33       | Peak     |
| 2    | 1595.0000    | 36.29                      | -3.04                   | 33.25                     | 54.00           | -20.75       | AVG      |
| 3    | 2400.0000    | 39.97                      | 0.62                    | 40.59                     | 74.00           | -33.41       | Peak     |
| 4    | 2400.0000    | 30.57                      | 0.62                    | 31.19                     | 54.00           | -22.81       | AVG      |
| 5    | 3150.0000    | 38.14                      | 4.53                    | 42.67                     | 74.00           | -31.33       | Peak     |
| 6    | 3150.0000    | 29.89                      | 4.53                    | 34.42                     | 54.00           | -19.58       | AVG      |
| 7    | 3692.5000    | 37.10                      | 5.50                    | 42.60                     | 74.00           | -31.40       | Peak     |
| 8    | 3692.5000    | 28.62                      | 5.50                    | 34.12                     | 54.00           | -19.88       | AVG      |
| 9    | 4782.5000    | 35.89                      | 7.00                    | 42.89                     | 74.00           | -31.11       | Peak     |
| 10   | 4782.5000    | 26.42                      | 7.00                    | 33.42                     | 54.00           | -20.58       | AVG      |
| 11   | 5440.0000    | 34.46                      | 8.98                    | 43.44                     | 74.00           | -30.56       | Peak     |
| 12 * | 5440.0000    | 25.67                      | 8.98                    | 34.65                     | 54.00           | -19.35       | AVG      |

|               |                                                                  |                   |          |
|---------------|------------------------------------------------------------------|-------------------|----------|
| EUT           | Smart Phone                                                      | Model Name        | MHA-L29  |
| Temperature   | 25°C                                                             | Relative Humidity | 60%      |
| Test Voltage  | AC 120V/60Hz                                                     | Polarization      | Vertical |
| Test Mode     | Adapter+Idle+BT+2.4G WIFI+GPS+Camera on+Earphone                 |                   |          |
| Note          | Adapter:Phitek(US)+Honglin +Battery: Desay+ Earphone: Lianchuang |                   |          |
| Test Engineer | Kevin Li                                                         |                   |          |

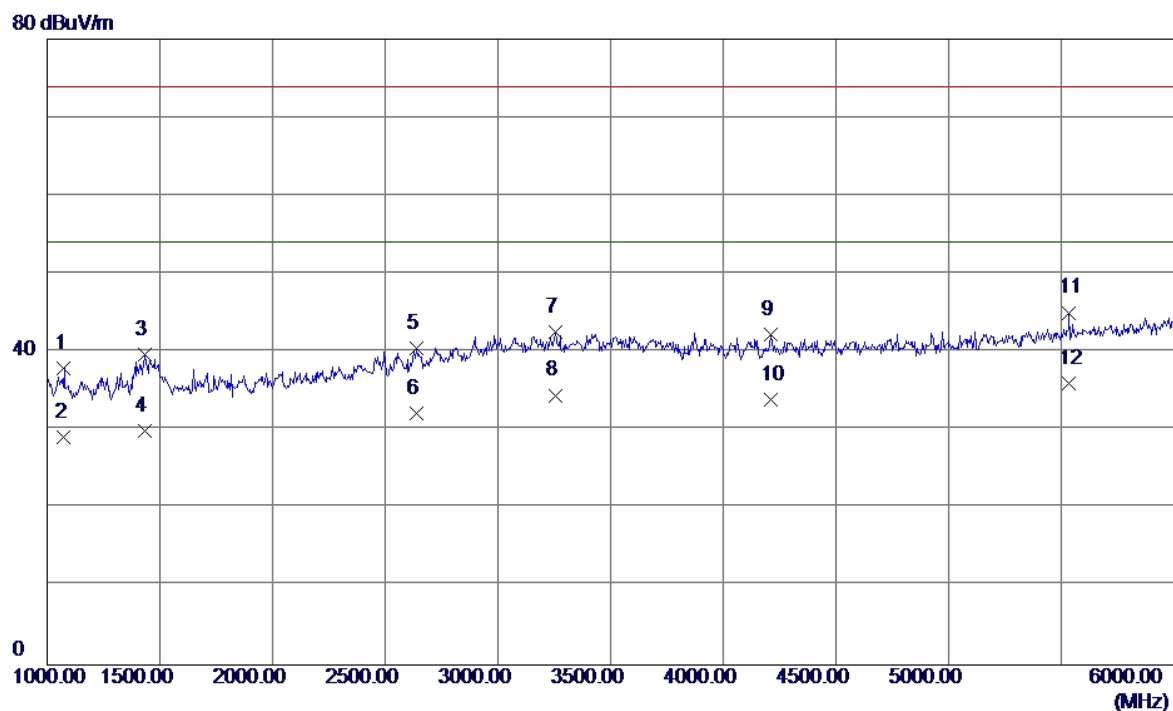

| No.  | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector |
|------|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|
| 1    | 1075.0000    | 43.13                      | -5.17                   | 37.96                     | 74.00           | -36.04       | Peak     |
| 2    | 1075.0000    | 34.30                      | -5.17                   | 29.13                     | 54.00           | -24.87       | AVG      |
| 3    | 1435.0000    | 43.41                      | -3.67                   | 39.74                     | 74.00           | -34.26       | Peak     |
| 4    | 1435.0000    | 33.54                      | -3.67                   | 29.87                     | 54.00           | -24.13       | AVG      |
| 5    | 2640.0000    | 38.54                      | 1.99                    | 40.53                     | 74.00           | -33.47       | Peak     |
| 6    | 2640.0000    | 30.13                      | 1.99                    | 32.12                     | 54.00           | -21.88       | AVG      |
| 7    | 3255.0000    | 37.73                      | 4.80                    | 42.53                     | 74.00           | -31.47       | Peak     |
| 8    | 3255.0000    | 29.68                      | 4.80                    | 34.48                     | 54.00           | -19.52       | AVG      |
| 9    | 4212.5000    | 36.27                      | 5.98                    | 42.25                     | 74.00           | -31.75       | Peak     |
| 10   | 4212.5000    | 27.95                      | 5.98                    | 33.93                     | 54.00           | -20.07       | AVG      |
| 11   | 5535.0000    | 35.71                      | 9.33                    | 45.04                     | 74.00           | -28.96       | Peak     |
| 12 * | 5535.0000    | 26.65                      | 9.33                    | 35.98                     | 54.00           | -18.02       | AVG      |


|               |                                                                  |                   |            |
|---------------|------------------------------------------------------------------|-------------------|------------|
| EUT           | Smart Phone                                                      | Model Name        | MHA-L29    |
| Temperature   | 25°C                                                             | Relative Humidity | 60%        |
| Test Voltage  | AC 120V/60Hz                                                     | Polarization      | Horizontal |
| Test Mode     | Adapter+Idle+BT+2.4G WIFI+GPS+Camera on+Earphone                 |                   |            |
| Note          | Adapter:Phitek(US)+Honglin +Battery: Desay+ Earphone: Lianchuang |                   |            |
| Test Engineer | Kevin Li                                                         |                   |            |

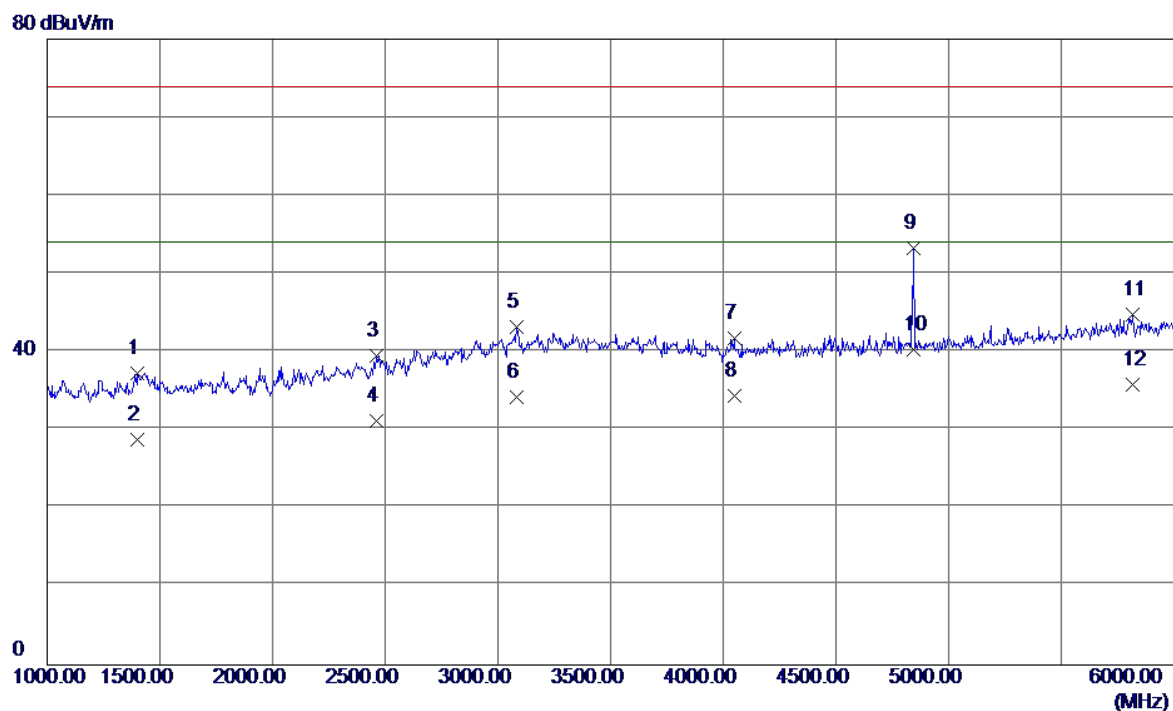

| No.  | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector |
|------|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|
| 1    | 1400.0000    | 41.09                      | -3.81                   | 37.28                     | 74.00           | -36.72       | Peak     |
| 2    | 1400.0000    | 32.59                      | -3.81                   | 28.78                     | 54.00           | -25.22       | AVG      |
| 3    | 2462.5000    | 38.63                      | 0.95                    | 39.58                     | 74.00           | -34.42       | Peak     |
| 4    | 2462.5000    | 30.24                      | 0.95                    | 31.19                     | 54.00           | -22.81       | AVG      |
| 5    | 3085.0000    | 38.79                      | 4.36                    | 43.15                     | 74.00           | -30.85       | Peak     |
| 6    | 3085.0000    | 29.95                      | 4.36                    | 34.31                     | 54.00           | -19.69       | AVG      |
| 7    | 4047.5000    | 36.10                      | 5.69                    | 41.79                     | 74.00           | -32.21       | Peak     |
| 8    | 4047.5000    | 28.64                      | 5.69                    | 34.33                     | 54.00           | -19.67       | AVG      |
| 9    | 4845.0000    | 46.23                      | 7.11                    | 53.34                     | 74.00           | -20.66       | Peak     |
| 10 * | 4845.0000    | 33.23                      | 7.11                    | 40.34                     | 54.00           | -13.66       | AVG      |
| 11   | 5817.5000    | 34.44                      | 10.40                   | 44.84                     | 74.00           | -29.16       | Peak     |
| 12   | 5817.5000    | 25.47                      | 10.40                   | 35.87                     | 54.00           | -18.13       | AVG      |

|               |                                                                   |                   |          |
|---------------|-------------------------------------------------------------------|-------------------|----------|
| EUT           | Smart Phone                                                       | Model Name        | MHA-L29  |
| Temperature   | 25°C                                                              | Relative Humidity | 60%      |
| Test Voltage  | AC 120V/60Hz                                                      | Polarization      | Vertical |
| Test Mode     | Adapter+Idle+BT+2.4G WIFI+GPS+Camera on+Earphone                  |                   |          |
| Note          | Adapter:Salcomp(US)+Honglin +Battery: Desay+ Earphone: Lianchuang |                   |          |
| Test Engineer | Kevin Li                                                          |                   |          |


80 dBuV/m

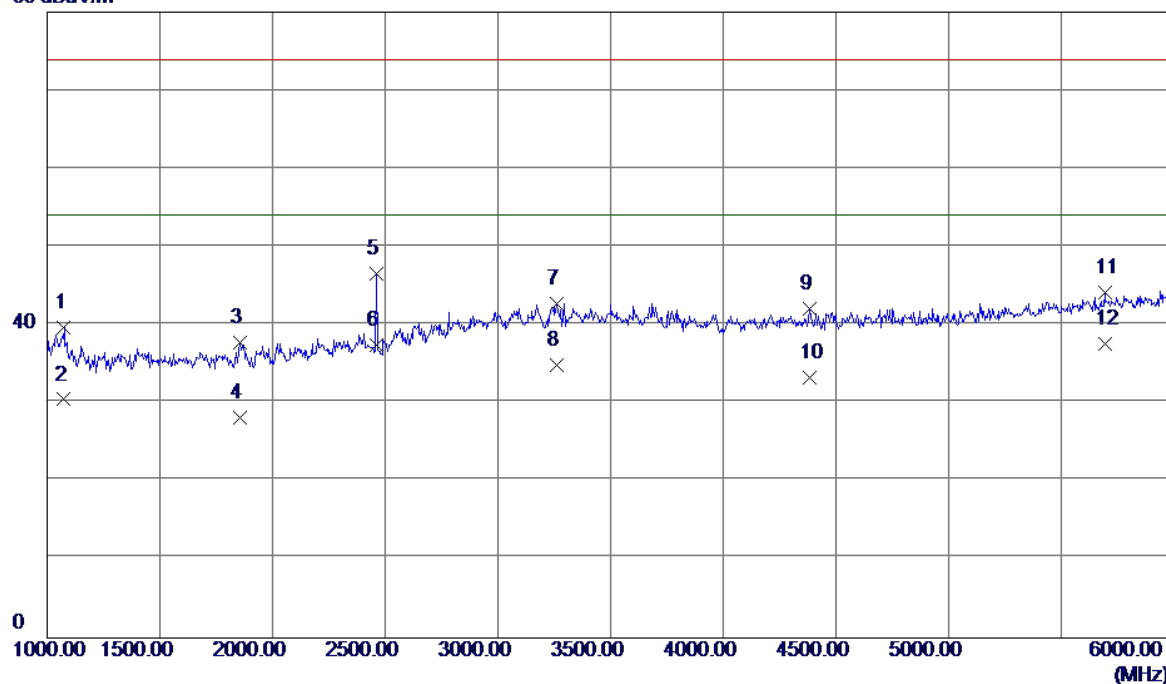

| No.  | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector |
|------|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|
| 1    | 1075.0000    | 44.93                      | -5.17                   | 39.76                     | 74.00           | -34.24       | Peak     |
| 2    | 1075.0000    | 35.65                      | -5.17                   | 30.48                     | 54.00           | -23.52       | AVG      |
| 3    | 1855.0000    | 39.83                      | -2.06                   | 37.77                     | 74.00           | -36.23       | Peak     |
| 4    | 1855.0000    | 30.26                      | -2.06                   | 28.20                     | 54.00           | -25.80       | AVG      |
| 5    | 2462.5000    | 45.54                      | 0.95                    | 46.49                     | 74.00           | -27.51       | Peak     |
| 6    | 2462.5000    | 36.49                      | 0.95                    | 37.44                     | 54.00           | -16.56       | AVG      |
| 7    | 3262.5000    | 37.97                      | 4.82                    | 42.79                     | 74.00           | -31.21       | Peak     |
| 8    | 3262.5000    | 30.10                      | 4.82                    | 34.92                     | 54.00           | -19.08       | AVG      |
| 9    | 4382.5000    | 35.78                      | 6.28                    | 42.06                     | 74.00           | -31.94       | Peak     |
| 10   | 4382.5000    | 26.97                      | 6.28                    | 33.25                     | 54.00           | -20.75       | AVG      |
| 11   | 5692.5000    | 34.23                      | 9.92                    | 44.15                     | 74.00           | -29.85       | Peak     |
| 12 * | 5692.5000    | 27.62                      | 9.92                    | 37.54                     | 54.00           | -16.46       | AVG      |


|               |                                                                   |                   |            |
|---------------|-------------------------------------------------------------------|-------------------|------------|
| EUT           | Smart Phone                                                       | Model Name        | MHA-L29    |
| Temperature   | 25°C                                                              | Relative Humidity | 60%        |
| Test Voltage  | AC 120V/60Hz                                                      | Polarization      | Horizontal |
| Test Mode     | Adapter+Idle+BT+2.4G WIFI+GPS+Camera on+Earphone                  |                   |            |
| Note          | Adapter:Salcomp(US)+Honglin +Battery: Desay+ Earphone: Lianchuang |                   |            |
| Test Engineer | Kevin Li                                                          |                   |            |

80 dBuV/m

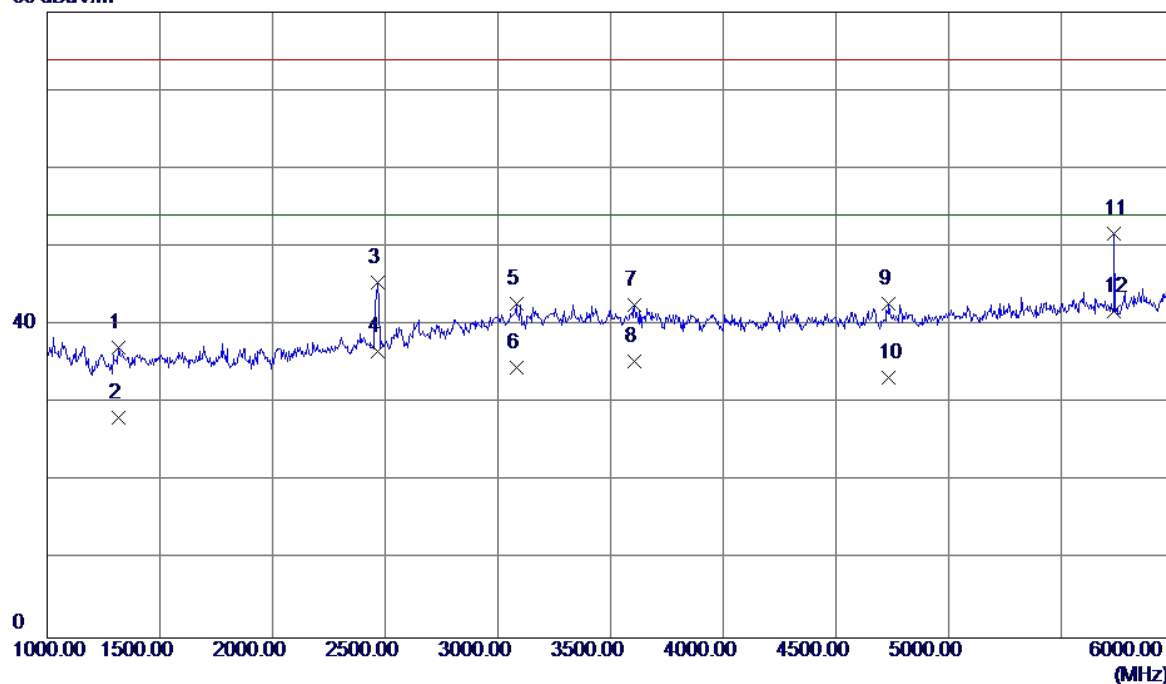

| No.  | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector |
|------|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|
| 1    | 1315.0000    | 41.31                      | -4.17                   | 37.14                     | 74.00           | -36.86       | Peak     |
| 2    | 1315.0000    | 32.27                      | -4.17                   | 28.10                     | 54.00           | -25.90       | AVG      |
| 3    | 2465.0000    | 44.43                      | 0.97                    | 45.40                     | 74.00           | -28.60       | Peak     |
| 4    | 2465.0000    | 35.68                      | 0.97                    | 36.65                     | 54.00           | -17.35       | AVG      |
| 5    | 3082.5000    | 38.30                      | 4.35                    | 42.65                     | 74.00           | -31.35       | Peak     |
| 6    | 3082.5000    | 30.15                      | 4.35                    | 34.50                     | 54.00           | -19.50       | AVG      |
| 7    | 3607.5000    | 37.15                      | 5.47                    | 42.62                     | 74.00           | -31.38       | Peak     |
| 8    | 3607.5000    | 29.85                      | 5.47                    | 35.32                     | 54.00           | -18.68       | AVG      |
| 9    | 4735.0000    | 35.77                      | 6.91                    | 42.68                     | 74.00           | -31.32       | Peak     |
| 10   | 4735.0000    | 26.34                      | 6.91                    | 33.25                     | 54.00           | -20.75       | AVG      |
| 11   | 5735.0000    | 41.62                      | 10.09                   | 51.71                     | 74.00           | -22.29       | Peak     |
| 12 * | 5735.0000    | 31.62                      | 10.09                   | 41.71                     | 54.00           | -12.29       | AVG      |


|               |                                                              |                   |          |
|---------------|--------------------------------------------------------------|-------------------|----------|
| EUT           | Smart Phone                                                  | Model Name        | MHA-L29  |
| Temperature   | 25°C                                                         | Relative Humidity | 60%      |
| Test Voltage  | AC 120V/60Hz                                                 | Polarization      | Vertical |
| Test Mode     | Adapter+Idle+BT+2.4G WIFI+GPS+Camera on+Earphone             |                   |          |
| Note          | Adapter:HK(US)+Honglin +Battery: Desay+ Earphone: Lianchuang |                   |          |
| Test Engineer | Kevin Li                                                     |                   |          |

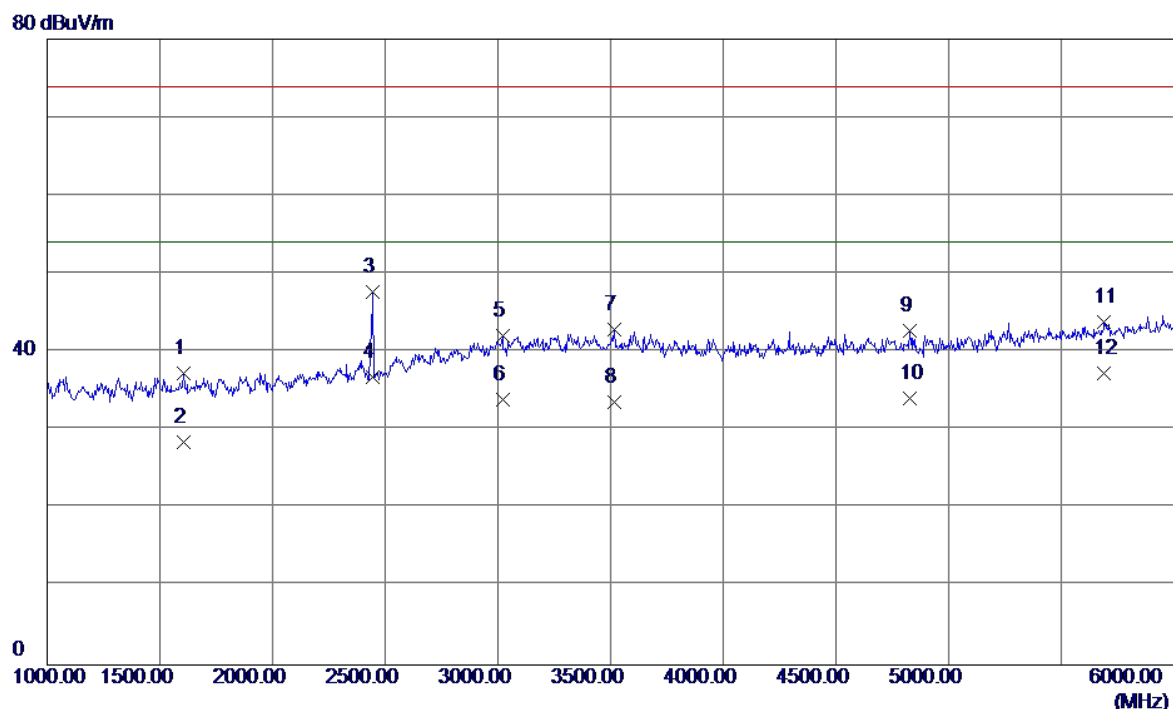

| No.  | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector |
|------|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|
| 1    | 1607.5000    | 40.20                      | -2.99                   | 37.21                     | 74.00           | -36.79       | Peak     |
| 2    | 1607.5000    | 31.51                      | -2.99                   | 28.52                     | 54.00           | -25.48       | AVG      |
| 3    | 2445.0000    | 46.78                      | 0.86                    | 47.64                     | 74.00           | -26.36       | Peak     |
| 4    | 2445.0000    | 35.92                      | 0.86                    | 36.78                     | 54.00           | -17.22       | AVG      |
| 5    | 3020.0000    | 37.82                      | 4.19                    | 42.01                     | 74.00           | -31.99       | Peak     |
| 6    | 3020.0000    | 29.68                      | 4.19                    | 33.87                     | 54.00           | -20.13       | AVG      |
| 7    | 3515.0000    | 37.41                      | 5.44                    | 42.85                     | 74.00           | -31.15       | Peak     |
| 8    | 3515.0000    | 28.16                      | 5.44                    | 33.60                     | 54.00           | -20.40       | AVG      |
| 9    | 4827.0000    | 35.58                      | 7.08                    | 42.66                     | 74.00           | -31.34       | Peak     |
| 10   | 4827.5000    | 26.94                      | 7.08                    | 34.02                     | 54.00           | -19.98       | AVG      |
| 11   | 5690.0000    | 33.96                      | 9.92                    | 43.88                     | 74.00           | -30.12       | Peak     |
| 12 * | 5690.0000    | 27.30                      | 9.92                    | 37.22                     | 54.00           | -16.78       | AVG      |


|               |                                                              |                   |            |
|---------------|--------------------------------------------------------------|-------------------|------------|
| EUT           | Smart Phone                                                  | Model Name        | MHA-L29    |
| Temperature   | 25°C                                                         | Relative Humidity | 60%        |
| Test Voltage  | AC 120V/60Hz                                                 | Polarization      | Horizontal |
| Test Mode     | Adapter+Idle+BT+2.4G WIFI+GPS+Camera on+Earphone             |                   |            |
| Note          | Adapter:HK(US)+Honglin +Battery: Desay+ Earphone: Lianchuang |                   |            |
| Test Engineer | Kevin Li                                                     |                   |            |

80 dBuV/m

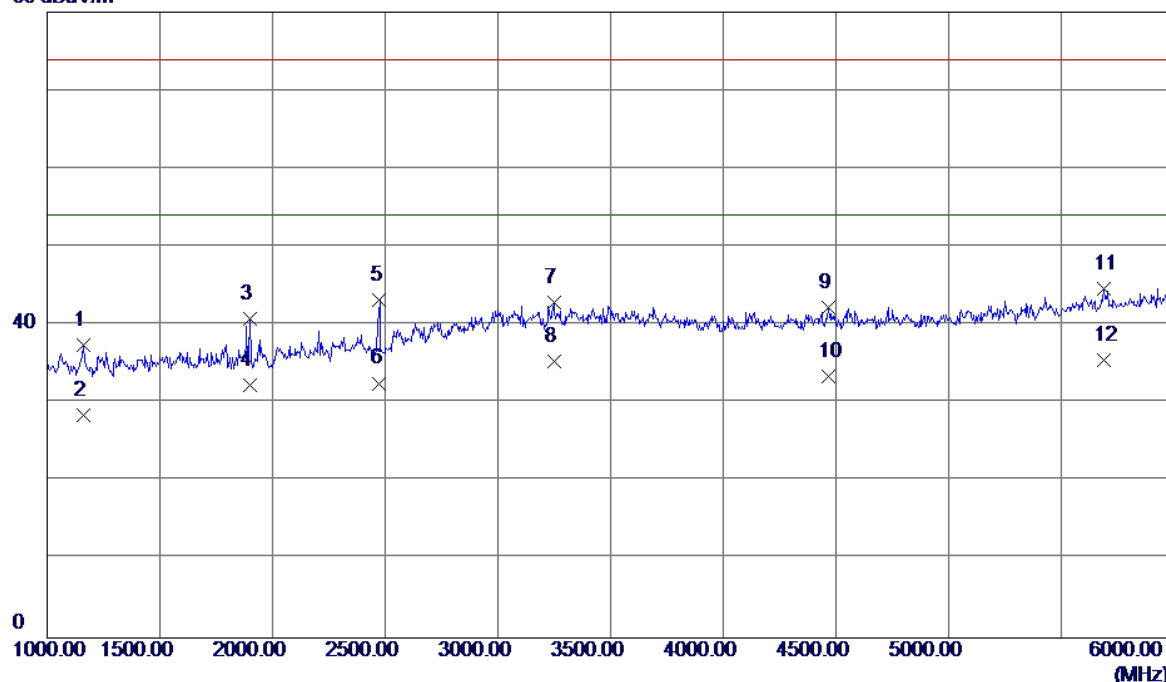


| No.  | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector |
|------|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|
| 1    | 1160.0000    | 42.27                      | -4.81                   | 37.46                     | 74.00           | -36.54       | Peak     |
| 2    | 1160.0000    | 33.26                      | -4.81                   | 28.45                     | 54.00           | -25.55       | AVG      |
| 3    | 1902.5000    | 42.63                      | -1.89                   | 40.74                     | 74.00           | -33.26       | Peak     |
| 4    | 1902.5000    | 34.20                      | -1.89                   | 32.31                     | 54.00           | -21.69       | AVG      |
| 5    | 2475.0000    | 42.24                      | 1.02                    | 43.26                     | 74.00           | -30.74       | Peak     |
| 6    | 2475.0000    | 31.54                      | 1.02                    | 32.56                     | 54.00           | -21.44       | AVG      |
| 7    | 3247.5000    | 38.10                      | 4.78                    | 42.88                     | 74.00           | -31.12       | Peak     |
| 8    | 3247.5000    | 30.65                      | 4.78                    | 35.43                     | 54.00           | -18.57       | AVG      |
| 9    | 4467.5000    | 35.79                      | 6.43                    | 42.22                     | 74.00           | -31.78       | Peak     |
| 10   | 4467.5000    | 26.97                      | 6.43                    | 33.40                     | 54.00           | -20.60       | AVG      |
| 11   | 5690.0000    | 34.67                      | 9.92                    | 44.59                     | 74.00           | -29.41       | Peak     |
| 12 * | 5690.0000    | 25.62                      | 9.92                    | 35.54                     | 54.00           | -18.46       | AVG      |

|               |                                                                  |                   |          |
|---------------|------------------------------------------------------------------|-------------------|----------|
| EUT           | Smart Phone                                                      | Model Name        | MHA-L29  |
| Temperature   | 25°C                                                             | Relative Humidity | 60%      |
| Test Voltage  | AC 120V/60Hz                                                     | Polarization      | Vertical |
| Test Mode     | Adapter+Idle+BT+2.4G WIFI+GPS+Camera on+Earphone                 |                   |          |
| Note          | Adapter:Phitek(EU)+Honglin +Battery: Desay+ Earphone: Lianchuang |                   |          |
| Test Engineer | Kevin Li                                                         |                   |          |

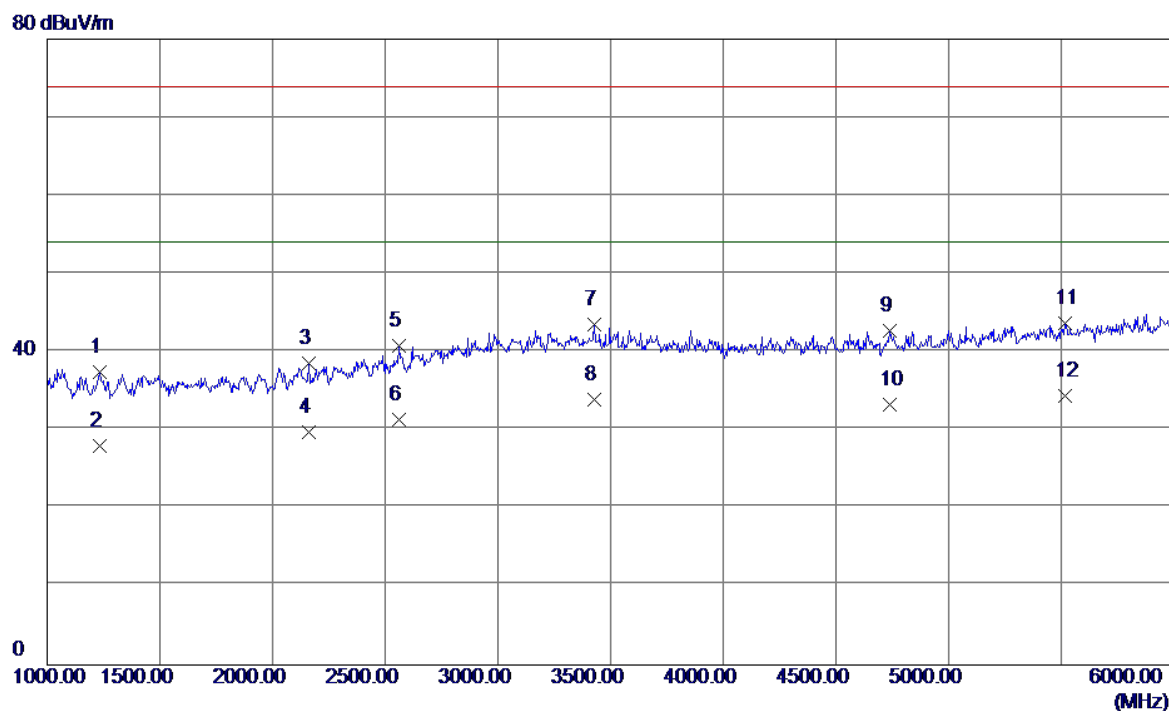

| No.  | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector |
|------|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|
| 1    | 1235.0000    | 41.93                      | -4.50                   | 37.43                     | 74.00           | -36.57       | Peak     |
| 2    | 1235.0000    | 32.52                      | -4.50                   | 28.02                     | 54.00           | -25.98       | AVG      |
| 3    | 2162.5000    | 39.26                      | -0.65                   | 38.61                     | 74.00           | -35.39       | Peak     |
| 4    | 2162.5000    | 30.41                      | -0.65                   | 29.76                     | 54.00           | -24.24       | AVG      |
| 5    | 2560.0000    | 39.25                      | 1.51                    | 40.76                     | 74.00           | -33.24       | Peak     |
| 6    | 2560.0000    | 29.85                      | 1.51                    | 31.36                     | 54.00           | -22.64       | AVG      |
| 7    | 3430.0000    | 38.26                      | 5.25                    | 43.51                     | 74.00           | -30.49       | Peak     |
| 8    | 3430.0000    | 28.68                      | 5.25                    | 33.93                     | 54.00           | -20.07       | AVG      |
| 9    | 4740.0000    | 35.75                      | 6.92                    | 42.67                     | 74.00           | -31.33       | Peak     |
| 10   | 4740.0000    | 26.42                      | 6.92                    | 33.34                     | 54.00           | -20.66       | AVG      |
| 11   | 5515.0000    | 34.40                      | 9.25                    | 43.65                     | 74.00           | -30.35       | Peak     |
| 12 * | 5515.0000    | 25.19                      | 9.25                    | 34.44                     | 54.00           | -19.56       | AVG      |


|               |                                                                  |                   |            |
|---------------|------------------------------------------------------------------|-------------------|------------|
| EUT           | Smart Phone                                                      | Model Name        | MHA-L29    |
| Temperature   | 25°C                                                             | Relative Humidity | 60%        |
| Test Voltage  | AC 120V/60Hz                                                     | Polarization      | Horizontal |
| Test Mode     | Adapter+Idle+BT+2.4G WIFI+GPS+Camera on+Earphone                 |                   |            |
| Note          | Adapter:Phitek(EU)+Honglin +Battery: Desay+ Earphone: Lianchuang |                   |            |
| Test Engineer | Kevin Li                                                         |                   |            |

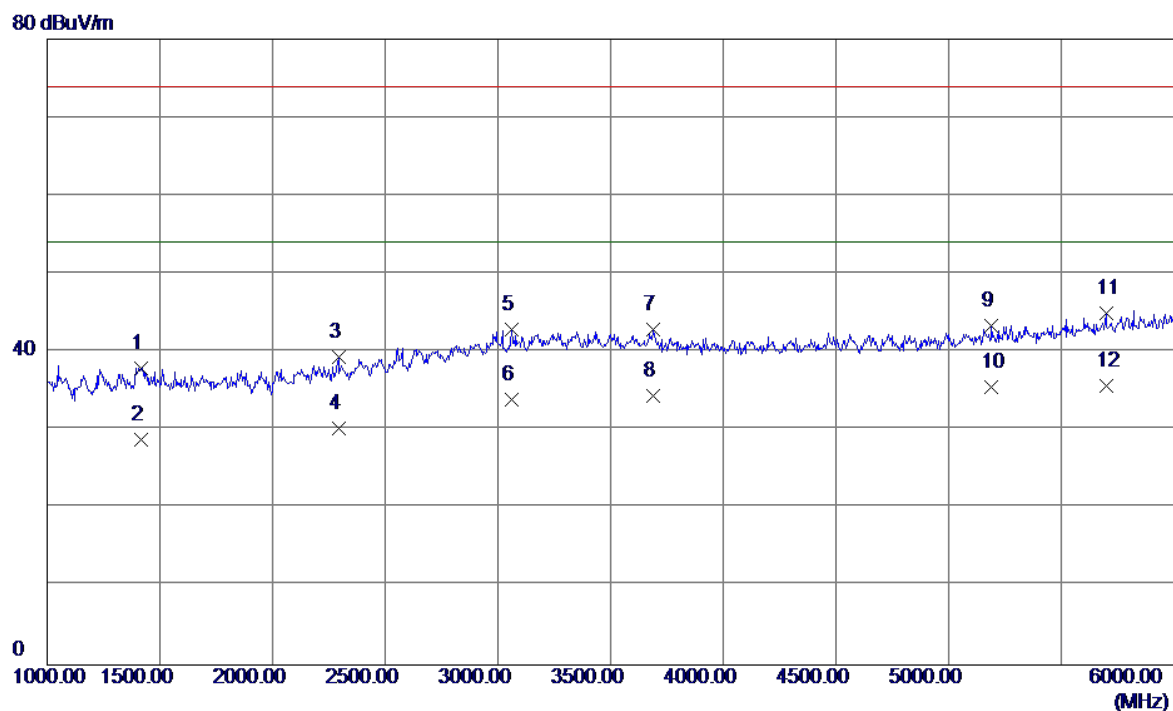

| No.  | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector |
|------|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|
| 1    | 1415.0000    | 41.71                      | -3.75                   | 37.96                     | 74.00           | -36.04       | Peak     |
| 2    | 1415.0000    | 32.57                      | -3.75                   | 28.82                     | 54.00           | -25.18       | AVG      |
| 3    | 2292.5000    | 39.32                      | 0.04                    | 39.36                     | 74.00           | -34.64       | Peak     |
| 4    | 2292.5000    | 30.14                      | 0.04                    | 30.18                     | 54.00           | -23.82       | AVG      |
| 5    | 3060.0000    | 38.51                      | 4.30                    | 42.81                     | 74.00           | -31.19       | Peak     |
| 6    | 3060.0000    | 29.68                      | 4.30                    | 33.98                     | 54.00           | -20.02       | AVG      |
| 7    | 3690.0000    | 37.39                      | 5.50                    | 42.89                     | 74.00           | -31.11       | Peak     |
| 8    | 3690.0000    | 28.94                      | 5.50                    | 34.44                     | 54.00           | -19.56       | AVG      |
| 9    | 5190.0000    | 35.28                      | 8.08                    | 43.36                     | 74.00           | -30.64       | Peak     |
| 10   | 5190.0000    | 27.43                      | 8.08                    | 35.51                     | 54.00           | -18.49       | AVG      |
| 11   | 5697.5000    | 35.07                      | 9.94                    | 45.01                     | 74.00           | -28.99       | Peak     |
| 12 * | 5697.5000    | 25.69                      | 9.94                    | 35.63                     | 54.00           | -18.37       | AVG      |

|               |                                                                   |                   |          |
|---------------|-------------------------------------------------------------------|-------------------|----------|
| EUT           | Smart Phone                                                       | Model Name        | MHA-L29  |
| Temperature   | 25°C                                                              | Relative Humidity | 60%      |
| Test Voltage  | AC 120V/60Hz                                                      | Polarization      | Vertical |
| Test Mode     | Adapter+Idle+BT+2.4G WIFI+GPS+Camera on+Earphone                  |                   |          |
| Note          | Adapter:Salcomp(EU)+Honglin +Battery: Desay+ Earphone: Lianchuang |                   |          |
| Test Engineer | Kevin Li                                                          |                   |          |


80 dBuV/m

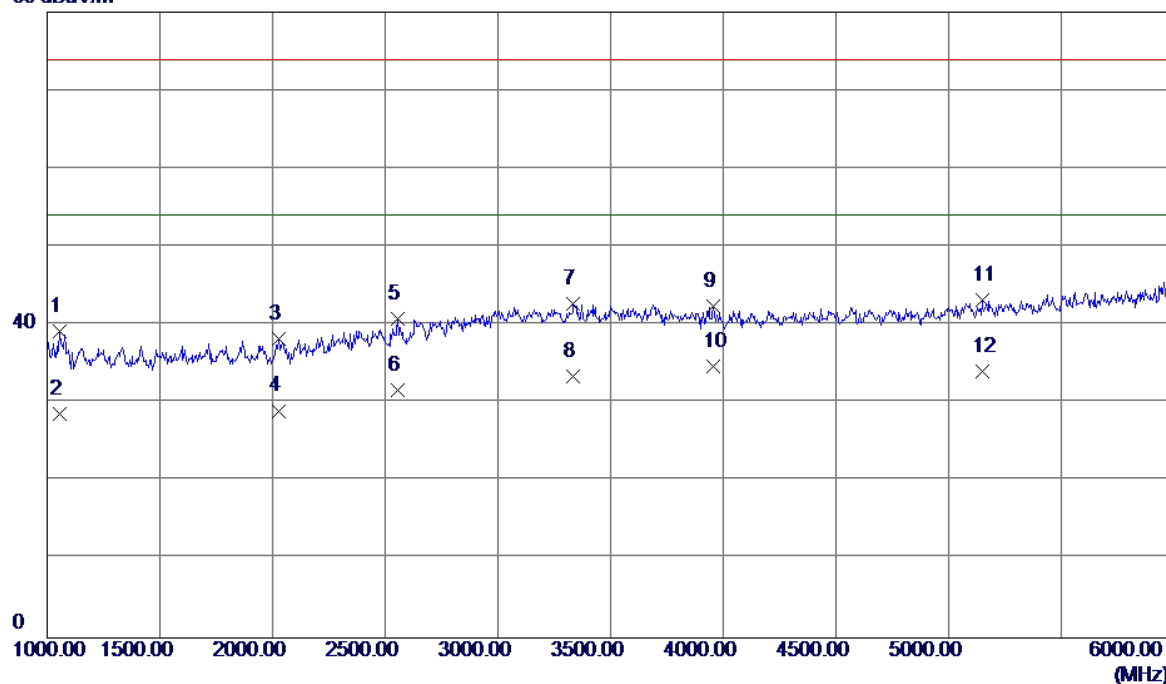

| No.  | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector |
|------|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|
| 1    | 1055.0000    | 44.44                      | -5.25                   | 39.19                     | 74.00           | -34.81       | Peak     |
| 2    | 1055.0000    | 33.94                      | -5.25                   | 28.69                     | 54.00           | -25.31       | AVG      |
| 3    | 2027.5000    | 39.55                      | -1.37                   | 38.18                     | 74.00           | -35.82       | Peak     |
| 4    | 2027.5000    | 30.41                      | -1.37                   | 29.04                     | 54.00           | -24.96       | AVG      |
| 5    | 2555.0000    | 39.31                      | 1.48                    | 40.79                     | 74.00           | -33.21       | Peak     |
| 6    | 2555.0000    | 30.14                      | 1.48                    | 31.62                     | 54.00           | -22.38       | AVG      |
| 7    | 3335.0000    | 37.76                      | 5.01                    | 42.77                     | 74.00           | -31.23       | Peak     |
| 8    | 3335.0000    | 28.49                      | 5.01                    | 33.50                     | 54.00           | -20.50       | AVG      |
| 9    | 3955.0000    | 36.78                      | 5.59                    | 42.37                     | 74.00           | -31.63       | Peak     |
| 10 * | 3955.0000    | 29.14                      | 5.59                    | 34.73                     | 54.00           | -19.27       | AVG      |
| 11   | 5147.5000    | 35.21                      | 7.92                    | 43.13                     | 74.00           | -30.87       | Peak     |
| 12   | 5147.5000    | 26.09                      | 7.92                    | 34.01                     | 54.00           | -19.99       | AVG      |

|               |                                                                   |                   |            |
|---------------|-------------------------------------------------------------------|-------------------|------------|
| EUT           | Smart Phone                                                       | Model Name        | MHA-L29    |
| Temperature   | 25°C                                                              | Relative Humidity | 60%        |
| Test Voltage  | AC 120V/60Hz                                                      | Polarization      | Horizontal |
| Test Mode     | Adapter+Idle+BT+2.4G WIFI+GPS+Camera on+Earphone                  |                   |            |
| Note          | Adapter:Salcomp(EU)+Honglin +Battery: Desay+ Earphone: Lianchuang |                   |            |
| Test Engineer | Kevin Li                                                          |                   |            |


80 dBuV/m

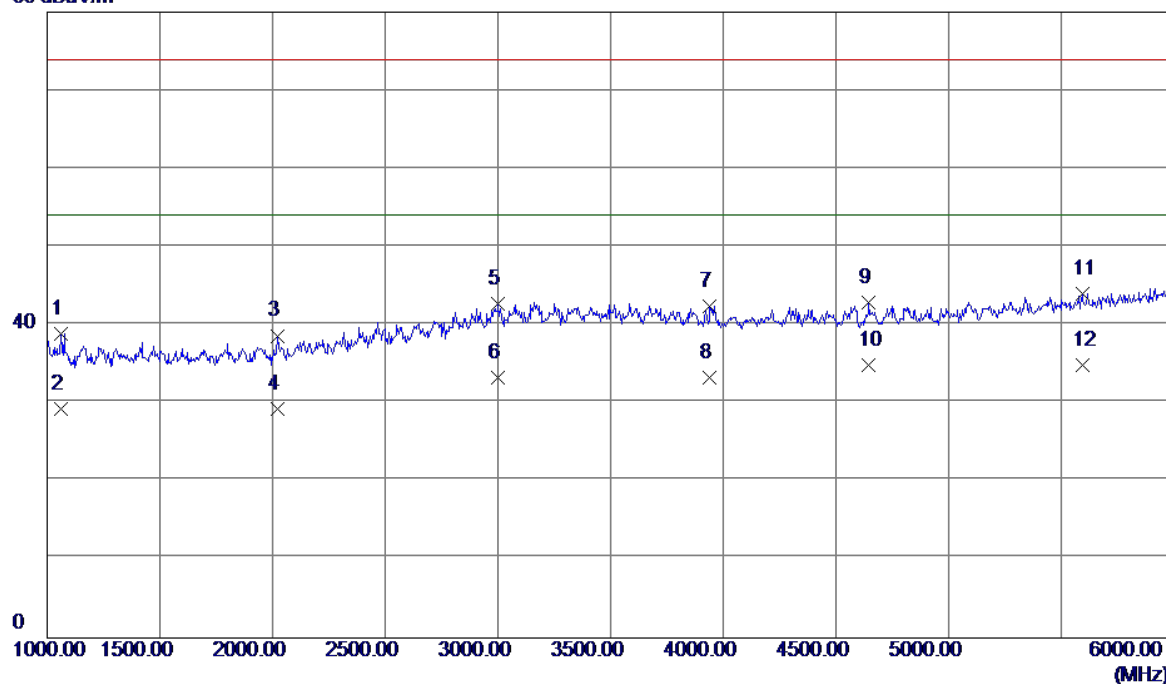

| No.  | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector |
|------|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|
| 1    | 1062.5000    | 44.07                      | -5.22                   | 38.85                     | 74.00           | -35.15       | Peak     |
| 2    | 1062.5000    | 34.52                      | -5.22                   | 29.30                     | 54.00           | -24.70       | AVG      |
| 3    | 2022.5000    | 40.04                      | -1.40                   | 38.64                     | 74.00           | -35.36       | Peak     |
| 4    | 2022.5000    | 30.65                      | -1.40                   | 29.25                     | 54.00           | -24.75       | AVG      |
| 5    | 3002.5000    | 38.52                      | 4.15                    | 42.67                     | 74.00           | -31.33       | Peak     |
| 6    | 3002.5000    | 29.17                      | 4.15                    | 33.32                     | 54.00           | -20.68       | AVG      |
| 7    | 3940.0000    | 36.88                      | 5.59                    | 42.47                     | 74.00           | -31.53       | Peak     |
| 8    | 3940.0000    | 27.65                      | 5.59                    | 33.24                     | 54.00           | -20.76       | AVG      |
| 9    | 4645.0000    | 36.06                      | 6.75                    | 42.81                     | 74.00           | -31.19       | Peak     |
| 10 * | 4645.0000    | 28.16                      | 6.75                    | 34.91                     | 54.00           | -19.09       | AVG      |
| 11   | 5592.5000    | 34.38                      | 9.55                    | 43.93                     | 74.00           | -30.07       | Peak     |
| 12   | 5592.5000    | 25.34                      | 9.55                    | 34.89                     | 54.00           | -19.11       | AVG      |

|               |                                                              |                   |          |
|---------------|--------------------------------------------------------------|-------------------|----------|
| EUT           | Smart Phone                                                  | Model Name        | MHA-L29  |
| Temperature   | 25°C                                                         | Relative Humidity | 60%      |
| Test Voltage  | AC 120V/60Hz                                                 | Polarization      | Vertical |
| Test Mode     | Adapter+Idle+BT+2.4G WIFI+GPS+Camera on+Earphone             |                   |          |
| Note          | Adapter:HK(EU)+Honglin +Battery: Desay+ Earphone: Lianchuang |                   |          |
| Test Engineer | Kevin Li                                                     |                   |          |


80 dBuV/m

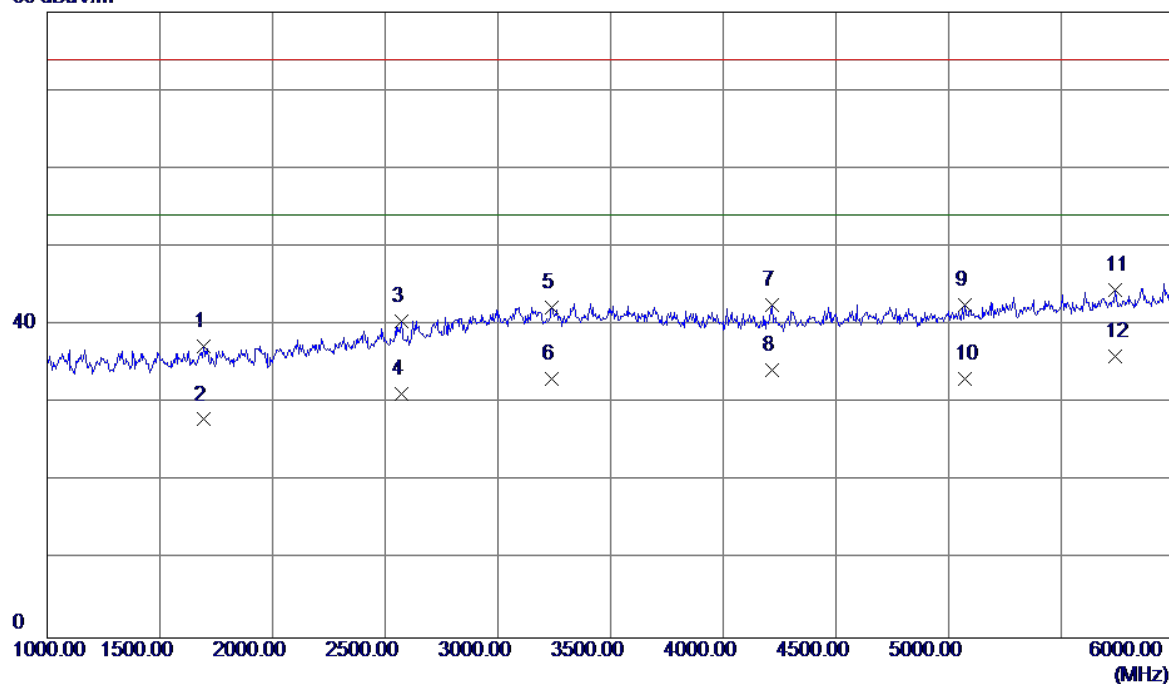

| No.  | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector |
|------|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|
| 1    | 1692.5000    | 39.93                      | -2.67                   | 37.26                     | 74.00           | -36.74       | Peak     |
| 2    | 1692.5000    | 30.59                      | -2.67                   | 27.92                     | 54.00           | -26.08       | AVG      |
| 3    | 2572.5000    | 38.86                      | 1.59                    | 40.45                     | 74.00           | -33.55       | Peak     |
| 4    | 2572.5000    | 29.67                      | 1.59                    | 31.26                     | 54.00           | -22.74       | AVG      |
| 5    | 3240.0000    | 37.50                      | 4.76                    | 42.26                     | 74.00           | -31.74       | Peak     |
| 6    | 3240.0000    | 28.42                      | 4.76                    | 33.18                     | 54.00           | -20.82       | AVG      |
| 7    | 4215.0000    | 36.64                      | 5.99                    | 42.63                     | 74.00           | -31.37       | Peak     |
| 8    | 4215.0000    | 28.30                      | 5.99                    | 34.29                     | 54.00           | -19.71       | AVG      |
| 9    | 5072.5000    | 34.95                      | 7.65                    | 42.60                     | 74.00           | -31.40       | Peak     |
| 10   | 5072.5000    | 25.45                      | 7.65                    | 33.10                     | 54.00           | -20.90       | AVG      |
| 11   | 5740.0000    | 34.44                      | 10.10                   | 44.54                     | 74.00           | -29.46       | Peak     |
| 12 * | 5740.0000    | 25.94                      | 10.10                   | 36.04                     | 54.00           | -17.96       | AVG      |

|               |                                                              |                   |            |
|---------------|--------------------------------------------------------------|-------------------|------------|
| EUT           | Smart Phone                                                  | Model Name        | MHA-L29    |
| Temperature   | 25°C                                                         | Relative Humidity | 60%        |
| Test Voltage  | AC 120V/60Hz                                                 | Polarization      | Horizontal |
| Test Mode     | Adapter+Idle+BT+2.4G WIFI+GPS+Camera on+Earphone             |                   |            |
| Note          | Adapter:HK(EU)+Honglin +Battery: Desay+ Earphone: Lianchuang |                   |            |
| Test Engineer | Kevin Li                                                     |                   |            |


80 dBuV/m

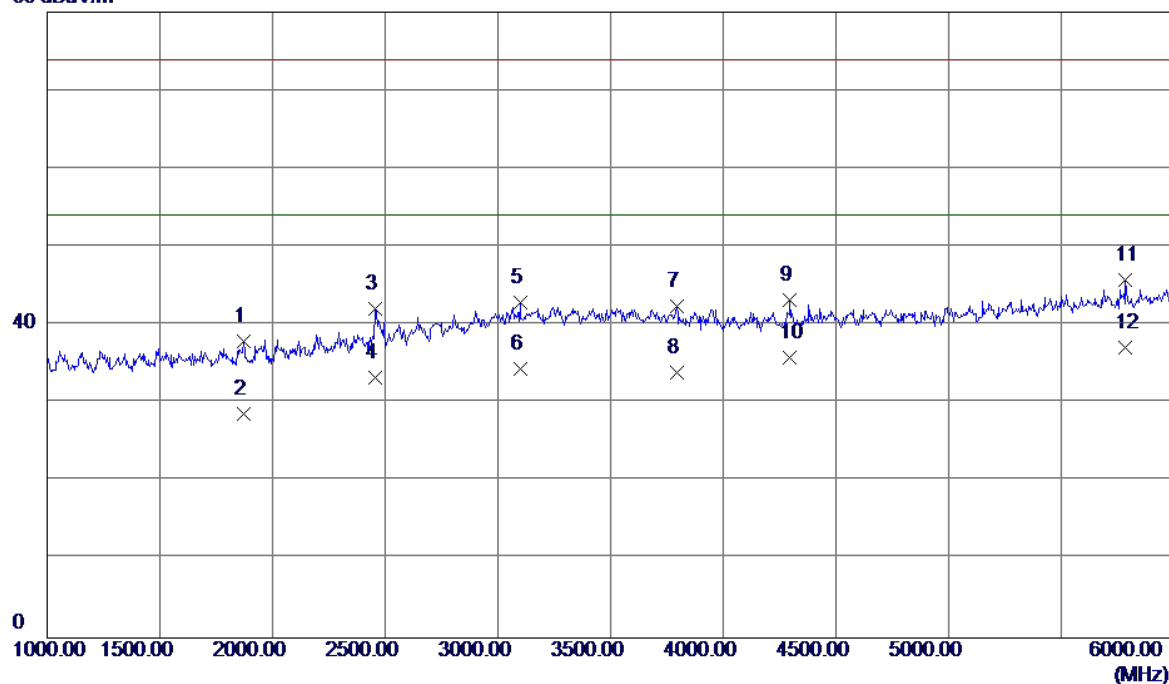

| No.  | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector |
|------|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|
| 1    | 1872.5000    | 39.91                      | -2.00                   | 37.91                     | 74.00           | -36.09       | Peak     |
| 2    | 1872.5000    | 30.63                      | -2.00                   | 28.63                     | 54.00           | -25.37       | AVG      |
| 3    | 2455.0000    | 41.16                      | 0.91                    | 42.07                     | 74.00           | -31.93       | Peak     |
| 4    | 2455.0000    | 32.41                      | 0.91                    | 33.32                     | 54.00           | -20.68       | AVG      |
| 5    | 3097.5000    | 38.54                      | 4.39                    | 42.93                     | 74.00           | -31.07       | Peak     |
| 6    | 3097.5000    | 30.02                      | 4.39                    | 34.41                     | 54.00           | -19.59       | AVG      |
| 7    | 3792.5000    | 36.86                      | 5.54                    | 42.40                     | 74.00           | -31.60       | Peak     |
| 8    | 3792.5000    | 28.34                      | 5.54                    | 33.88                     | 54.00           | -20.12       | AVG      |
| 9    | 4295.0000    | 37.06                      | 6.13                    | 43.19                     | 74.00           | -30.81       | Peak     |
| 10   | 4295.0000    | 29.76                      | 6.13                    | 35.89                     | 54.00           | -18.11       | AVG      |
| 11   | 5785.0000    | 35.49                      | 10.28                   | 45.77                     | 74.00           | -28.23       | Peak     |
| 12 * | 5785.0000    | 26.88                      | 10.28                   | 37.16                     | 54.00           | -16.84       | AVG      |

|               |                                                                   |                   |          |
|---------------|-------------------------------------------------------------------|-------------------|----------|
| EUT           | Smart Phone                                                       | Model Name        | MHA-L29  |
| Temperature   | 25°C                                                              | Relative Humidity | 60%      |
| Test Voltage  | AC 120V/60Hz                                                      | Polarization      | Vertical |
| Test Mode     | Adapter+Idle+BT+2.4G WIFI+GPS+Camera on+Earphone                  |                   |          |
| Note          | Adapter:Salcomp(US)+Honglin +Battery: Desay+ Earphone: Lianchuang |                   |          |
| Test Engineer | Kevin Li                                                          |                   |          |


100 dBuV/m

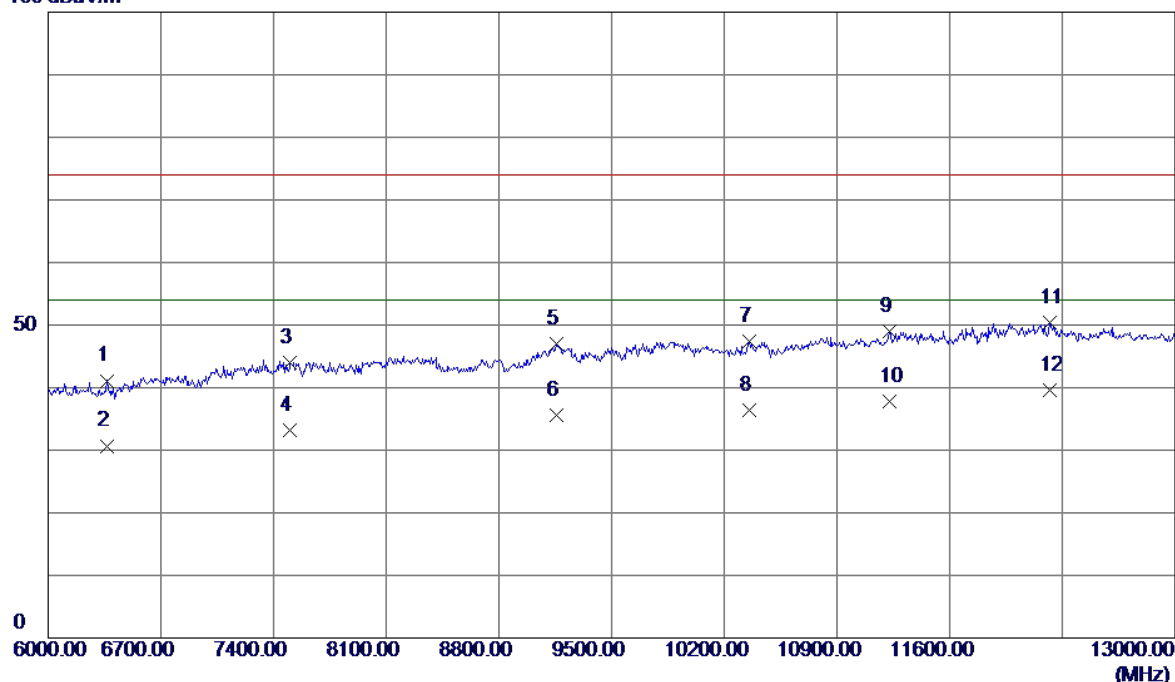

| No.  | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector |
|------|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|
| 1    | 6364.0000    | 39.05                      | 2.05                    | 41.10                     | 74.00           | -32.90       | Peak     |
| 2    | 6364.0000    | 28.65                      | 2.05                    | 30.70                     | 54.00           | -23.30       | AVG      |
| 3    | 7505.0000    | 41.44                      | 2.62                    | 44.06                     | 74.00           | -29.94       | Peak     |
| 4    | 7505.0000    | 30.51                      | 2.62                    | 33.13                     | 54.00           | -20.87       | AVG      |
| 5    | 9157.0000    | 43.88                      | 3.06                    | 46.94                     | 74.00           | -27.06       | Peak     |
| 6    | 9157.0000    | 32.55                      | 3.06                    | 35.61                     | 54.00           | -18.39       | AVG      |
| 7    | 10354.0000   | 43.46                      | 3.89                    | 47.35                     | 74.00           | -26.65       | Peak     |
| 8    | 10354.0000   | 32.53                      | 3.89                    | 36.42                     | 54.00           | -17.58       | AVG      |
| 9    | 11229.0000   | 44.79                      | 4.16                    | 48.95                     | 74.00           | -25.05       | Peak     |
| 10   | 11229.0000   | 33.62                      | 4.16                    | 37.78                     | 54.00           | -16.22       | AVG      |
| 11   | 12223.0000   | 46.55                      | 3.79                    | 50.34                     | 74.00           | -23.66       | Peak     |
| 12 * | 12223.0000   | 35.74                      | 3.79                    | 39.53                     | 54.00           | -14.47       | AVG      |

|               |                                                                   |                   |            |
|---------------|-------------------------------------------------------------------|-------------------|------------|
| EUT           | Smart Phone                                                       | Model Name        | MHA-L29    |
| Temperature   | 25°C                                                              | Relative Humidity | 60%        |
| Test Voltage  | AC 120V/60Hz                                                      | Polarization      | Horizontal |
| Test Mode     | Adapter+Idle+BT+2.4G WIFI+GPS+Camera on+Earphone                  |                   |            |
| Note          | Adapter:Salcomp(US)+Honglin +Battery: Desay+ Earphone: Lianchuang |                   |            |
| Test Engineer | Kevin Li                                                          |                   |            |


100 dBuV/m

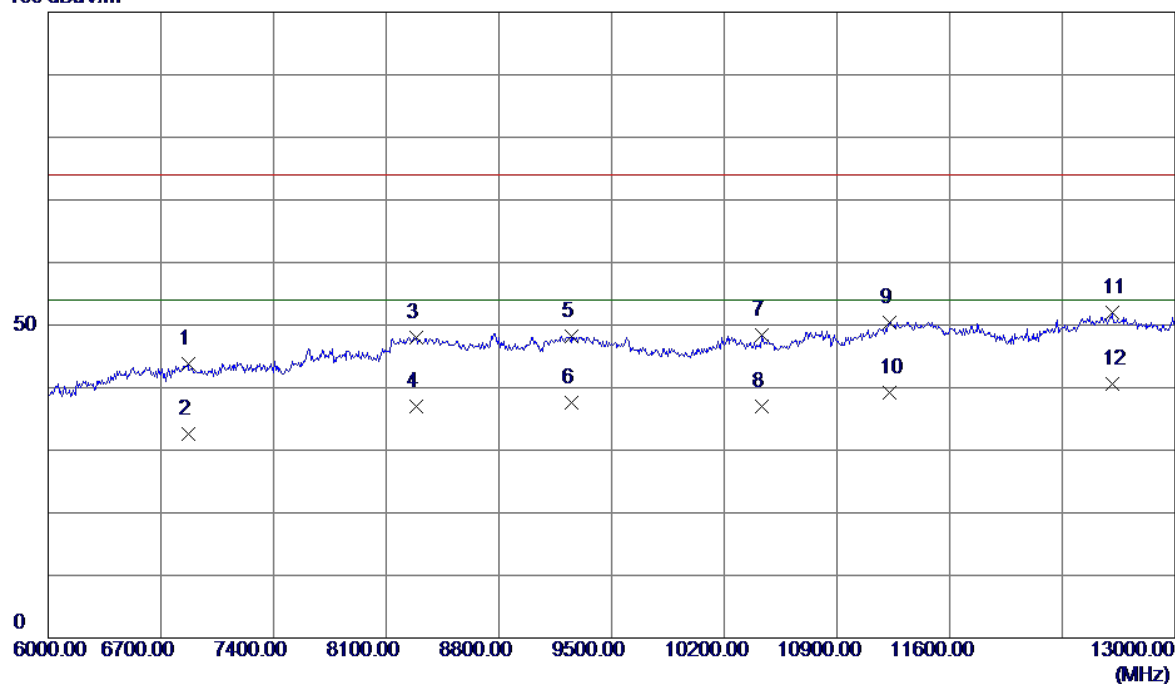

| No.  | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector |
|------|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|
| 1    | 6868.0000    | 41.48                      | 2.26                    | 43.74                     | 74.00           | -30.26       | Peak     |
| 2    | 6868.0000    | 30.27                      | 2.26                    | 32.53                     | 54.00           | -21.47       | AVG      |
| 3    | 8289.0000    | 45.42                      | 2.56                    | 47.98                     | 74.00           | -26.02       | Peak     |
| 4    | 8289.0000    | 34.50                      | 2.56                    | 37.06                     | 54.00           | -16.94       | AVG      |
| 5    | 9248.0000    | 45.12                      | 3.11                    | 48.23                     | 74.00           | -25.77       | Peak     |
| 6    | 9248.0000    | 34.51                      | 3.11                    | 37.62                     | 54.00           | -16.38       | AVG      |
| 7    | 10431.0000   | 44.34                      | 3.97                    | 48.31                     | 74.00           | -25.69       | Peak     |
| 8    | 10431.0000   | 33.05                      | 3.97                    | 37.02                     | 54.00           | -16.98       | AVG      |
| 9    | 11229.0000   | 46.28                      | 4.16                    | 50.44                     | 74.00           | -23.56       | Peak     |
| 10   | 11229.0000   | 35.07                      | 4.16                    | 39.23                     | 54.00           | -14.77       | AVG      |
| 11   | 12608.0000   | 47.49                      | 4.43                    | 51.92                     | 74.00           | -22.08       | Peak     |
| 12 * | 12608.0000   | 36.21                      | 4.43                    | 40.64                     | 54.00           | -13.36       | AVG      |

|               |                                                                                                             |                   |          |
|---------------|-------------------------------------------------------------------------------------------------------------|-------------------|----------|
| EUT           | Smart Phone                                                                                                 | Model Name        | MHA-L29  |
| Temperature   | 25°C                                                                                                        | Relative Humidity | 60%      |
| Test Voltage  | AC 120V/60Hz                                                                                                | Polarization      | Vertical |
| Test Mode     | Adapter+Idle+BT+5G WIFI+GPS+Camera on+Earphone                                                              |                   |          |
| Note          | Adapter:Salcomp(US)+Honglin +Battery: DesayAdapter:Phitek+Honglin<br>+Battery: Desay + Earphone: Lianchuang |                   |          |
| Test Engineer | Kevin Li                                                                                                    |                   |          |


80 dBuV/m

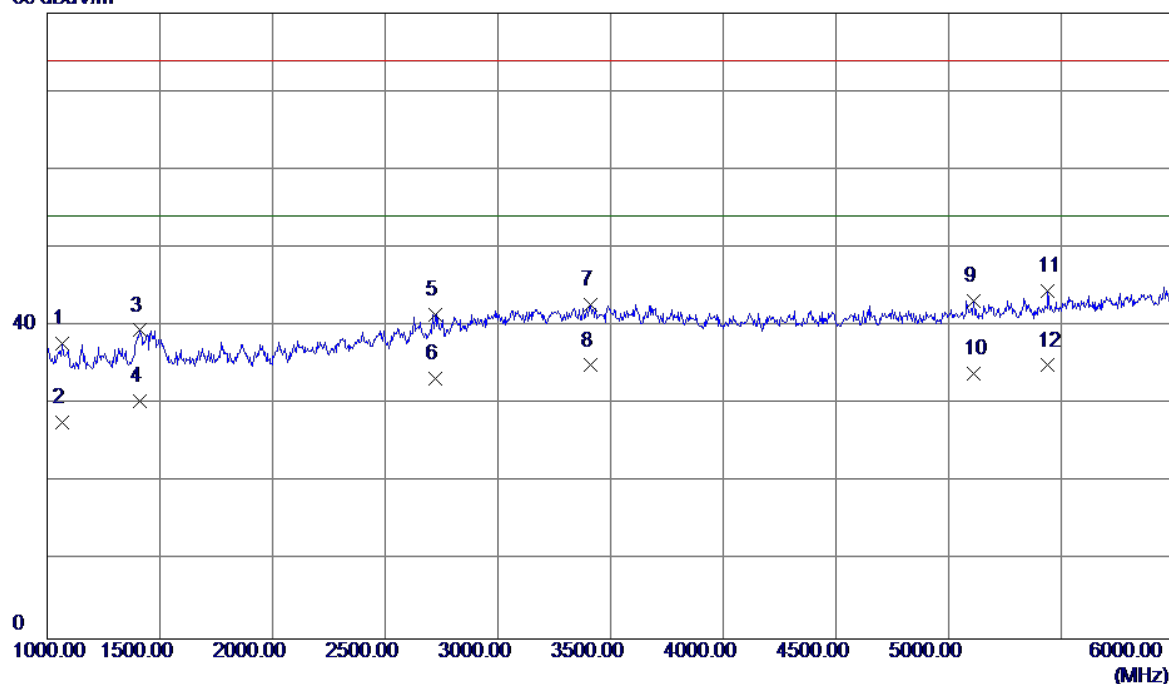

| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|
| 1   | 1065.0000    | 43.04                      | -5.21                   | 37.83                     | 74.00           | -36.17       | Peak     |
| 2   | 1065.0000    | 32.96                      | -5.21                   | 27.75                     | 54.00           | -26.25       | AVG      |
| 3   | 1412.5000    | 43.20                      | -3.76                   | 39.44                     | 74.00           | -34.56       | Peak     |
| 4   | 1412.5000    | 34.14                      | -3.76                   | 30.38                     | 54.00           | -23.62       | AVG      |
| 5   | 2722.5000    | 39.03                      | 2.48                    | 41.51                     | 74.00           | -32.49       | Peak     |
| 6   | 2722.5000    | 30.83                      | 2.48                    | 33.31                     | 54.00           | -20.69       | AVG      |
| 7   | 3410.0000    | 37.57                      | 5.20                    | 42.77                     | 74.00           | -31.23       | Peak     |
| 8 * | 3410.0000    | 29.76                      | 5.20                    | 34.96                     | 54.00           | -19.04       | AVG      |
| 9   | 5110.0000    | 35.45                      | 7.79                    | 43.24                     | 74.00           | -30.76       | Peak     |
| 10  | 5110.0000    | 26.14                      | 7.79                    | 33.93                     | 54.00           | -20.07       | AVG      |
| 11  | 5440.0000    | 35.51                      | 8.98                    | 44.49                     | 74.00           | -29.51       | Peak     |
| 12  | 5440.0000    | 25.98                      | 8.98                    | 34.96                     | 54.00           | -19.04       | AVG      |

|               |                                                                                                             |                   |            |
|---------------|-------------------------------------------------------------------------------------------------------------|-------------------|------------|
| EUT           | Smart Phone                                                                                                 | Model Name        | MHA-L29    |
| Temperature   | 25°C                                                                                                        | Relative Humidity | 60%        |
| Test Voltage  | AC 120V/60Hz                                                                                                | Polarization      | Horizontal |
| Test Mode     | Adapter+Idle+BT+5G WIFI+GPS+Camera on+Earphone                                                              |                   |            |
| Note          | Adapter:Salcomp(US)+Honglin +Battery: DesayAdapter:Phitek+Honglin<br>+Battery: Desay + Earphone: Lianchuang |                   |            |
| Test Engineer | Kevin Li                                                                                                    |                   |            |


80 dBuV/m

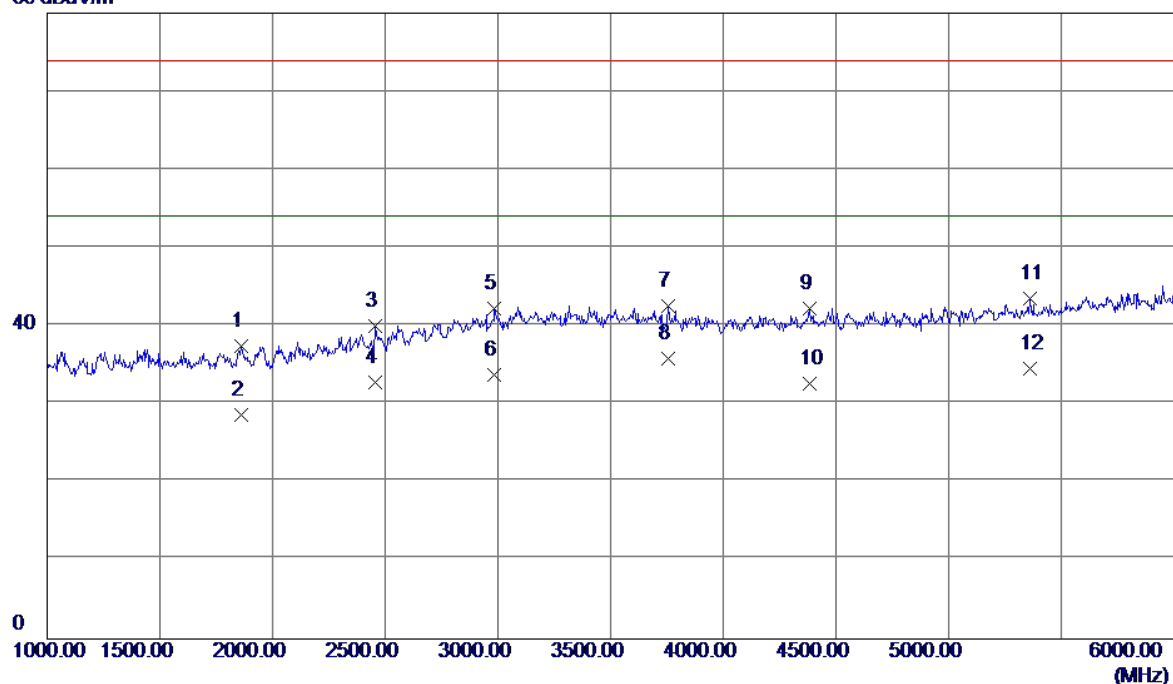

| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|
| 1   | 1862.5000    | 39.52                      | -2.04                   | 37.48                     | 74.00           | -36.52       | Peak     |
| 2   | 1862.5000    | 30.65                      | -2.04                   | 28.61                     | 54.00           | -25.39       | AVG      |
| 3   | 2457.5000    | 39.09                      | 0.93                    | 40.02                     | 74.00           | -33.98       | Peak     |
| 4   | 2457.5000    | 31.84                      | 0.93                    | 32.77                     | 54.00           | -21.23       | AVG      |
| 5   | 2985.0000    | 38.19                      | 4.05                    | 42.24                     | 74.00           | -31.76       | Peak     |
| 6   | 2985.0000    | 29.69                      | 4.05                    | 33.74                     | 54.00           | -20.26       | AVG      |
| 7   | 3757.5000    | 37.08                      | 5.53                    | 42.61                     | 74.00           | -31.39       | Peak     |
| 8 * | 3757.5000    | 30.24                      | 5.53                    | 35.77                     | 54.00           | -18.23       | AVG      |
| 9   | 4382.5000    | 35.97                      | 6.28                    | 42.25                     | 74.00           | -31.75       | Peak     |
| 10  | 4382.5000    | 26.43                      | 6.28                    | 32.71                     | 54.00           | -21.29       | AVG      |
| 11  | 5360.0000    | 34.79                      | 8.69                    | 43.48                     | 74.00           | -30.52       | Peak     |
| 12  | 5360.0000    | 25.87                      | 8.69                    | 34.56                     | 54.00           | -19.44       | AVG      |

|               |                                                                   |                   |          |
|---------------|-------------------------------------------------------------------|-------------------|----------|
| EUT           | Smart Phone                                                       | Model Name        | MHA-L29  |
| Temperature   | 25°C                                                              | Relative Humidity | 60%      |
| Test Voltage  | AC 120V/60Hz                                                      | Polarization      | Vertical |
| Test Mode     | Adapter+Idle+BT+5G WIFI+GPS+Camera on+Earphone                    |                   |          |
| Note          | Adapter:Salcomp(US)+Honglin +Battery: Desay+ Earphone: Lianchuang |                   |          |
| Test Engineer | Kevin Li                                                          |                   |          |


100 dBuV/m

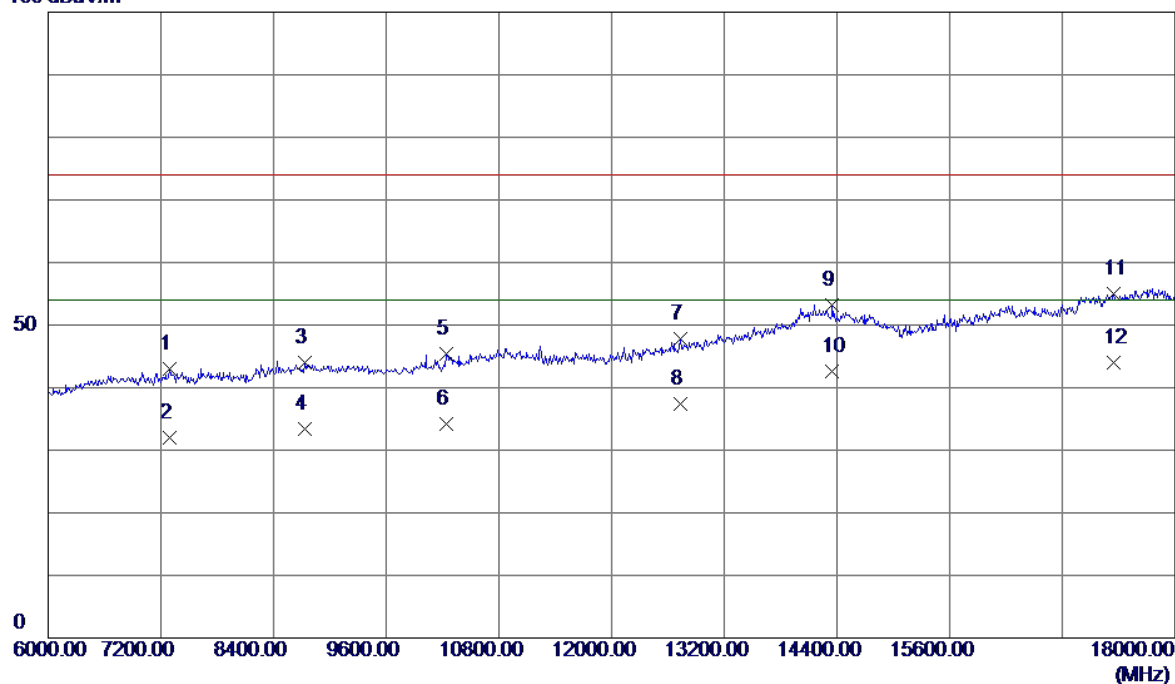

| No.  | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector |
|------|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|
| 1    | 7296.0000    | 40.63                      | 2.43                    | 43.06                     | 74.00           | -30.94       | Peak     |
| 2    | 7296.0000    | 29.55                      | 2.43                    | 31.98                     | 54.00           | -22.02       | AVG      |
| 3    | 8736.0000    | 41.11                      | 2.90                    | 44.01                     | 74.00           | -29.99       | Peak     |
| 4    | 8736.0000    | 30.54                      | 2.90                    | 33.44                     | 54.00           | -20.56       | AVG      |
| 5    | 10236.0000   | 41.57                      | 3.76                    | 45.33                     | 74.00           | -28.67       | Peak     |
| 6    | 10236.0000   | 30.42                      | 3.76                    | 34.18                     | 54.00           | -19.82       | AVG      |
| 7    | 12732.0000   | 43.08                      | 4.80                    | 47.88                     | 74.00           | -26.12       | Peak     |
| 8    | 12732.0000   | 32.53                      | 4.80                    | 37.33                     | 54.00           | -16.67       | AVG      |
| 9    | 14352.0000   | 45.13                      | 8.07                    | 53.20                     | 74.00           | -20.80       | Peak     |
| 10   | 14352.0000   | 34.58                      | 8.07                    | 42.65                     | 54.00           | -11.35       | AVG      |
| 11   | 17352.0000   | 47.53                      | 7.39                    | 54.92                     | 74.00           | -19.08       | Peak     |
| 12 * | 17352.0000   | 36.56                      | 7.39                    | 43.95                     | 54.00           | -10.05       | AVG      |

|               |                                                                   |                   |            |
|---------------|-------------------------------------------------------------------|-------------------|------------|
| EUT           | Smart Phone                                                       | Model Name        | MHA-L29    |
| Temperature   | 25°C                                                              | Relative Humidity | 60%        |
| Test Voltage  | AC 120V/60Hz                                                      | Polarization      | Horizontal |
| Test Mode     | Adapter+Idle+BT+5G WIFI+GPS+Camera on+Earphone                    |                   |            |
| Note          | Adapter:Salcomp(US)+Honglin +Battery: Desay+ Earphone: Lianchuang |                   |            |
| Test Engineer | Kevin Li                                                          |                   |            |


100 dBuV/m

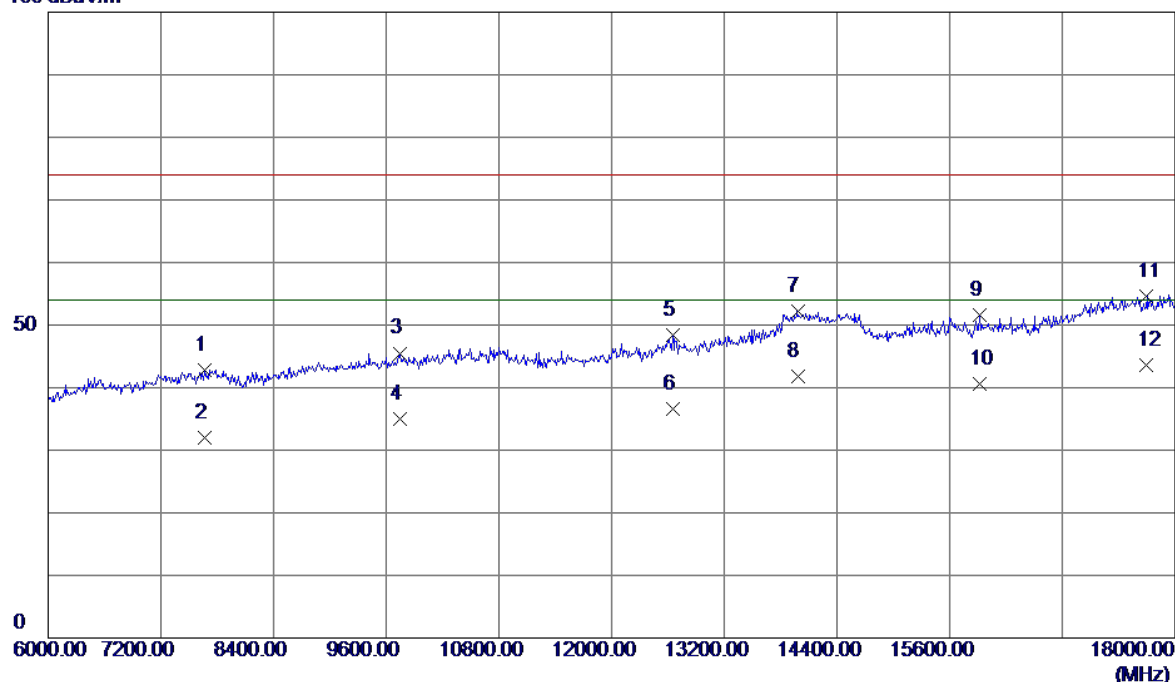

| No.  | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector |
|------|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|
| 1    | 7668.0000    | 40.42                      | 2.47                    | 42.89                     | 74.00           | -31.11       | Peak     |
| 2    | 7668.0000    | 29.54                      | 2.47                    | 32.01                     | 54.00           | -21.99       | AVG      |
| 3    | 9744.0000    | 42.13                      | 3.37                    | 45.50                     | 74.00           | -28.50       | Peak     |
| 4    | 9744.0000    | 31.55                      | 3.37                    | 34.92                     | 54.00           | -19.08       | AVG      |
| 5    | 12648.0000   | 43.79                      | 4.55                    | 48.34                     | 74.00           | -25.66       | Peak     |
| 6    | 12648.0000   | 32.05                      | 4.55                    | 36.60                     | 54.00           | -17.40       | AVG      |
| 7    | 13980.0000   | 43.05                      | 9.18                    | 52.23                     | 74.00           | -21.77       | Peak     |
| 8    | 13980.0000   | 32.65                      | 9.18                    | 41.83                     | 54.00           | -12.17       | AVG      |
| 9    | 15924.0000   | 47.69                      | 3.95                    | 51.64                     | 74.00           | -22.36       | Peak     |
| 10   | 15924.0000   | 36.56                      | 3.95                    | 40.51                     | 54.00           | -13.49       | AVG      |
| 11   | 17700.0000   | 46.51                      | 8.08                    | 54.59                     | 74.00           | -19.41       | Peak     |
| 12 * | 17700.0000   | 35.47                      | 8.08                    | 43.55                     | 54.00           | -10.45       | AVG      |

|               |                                                                   |                   |          |
|---------------|-------------------------------------------------------------------|-------------------|----------|
| EUT           | Smart Phone                                                       | Model Name        | MHA-L29  |
| Temperature   | 25°C                                                              | Relative Humidity | 60%      |
| Test Voltage  | AC 120V/60Hz                                                      | Polarization      | Vertical |
| Test Mode     | Adapter+Idle+BT+5G WIFI+GPS+Camera on+Earphone                    |                   |          |
| Note          | Adapter:Salcomp(US)+Honglin +Battery: Desay+ Earphone: Lianchuang |                   |          |
| Test Engineer | Kevin Li                                                          |                   |          |


100 dBuV/m

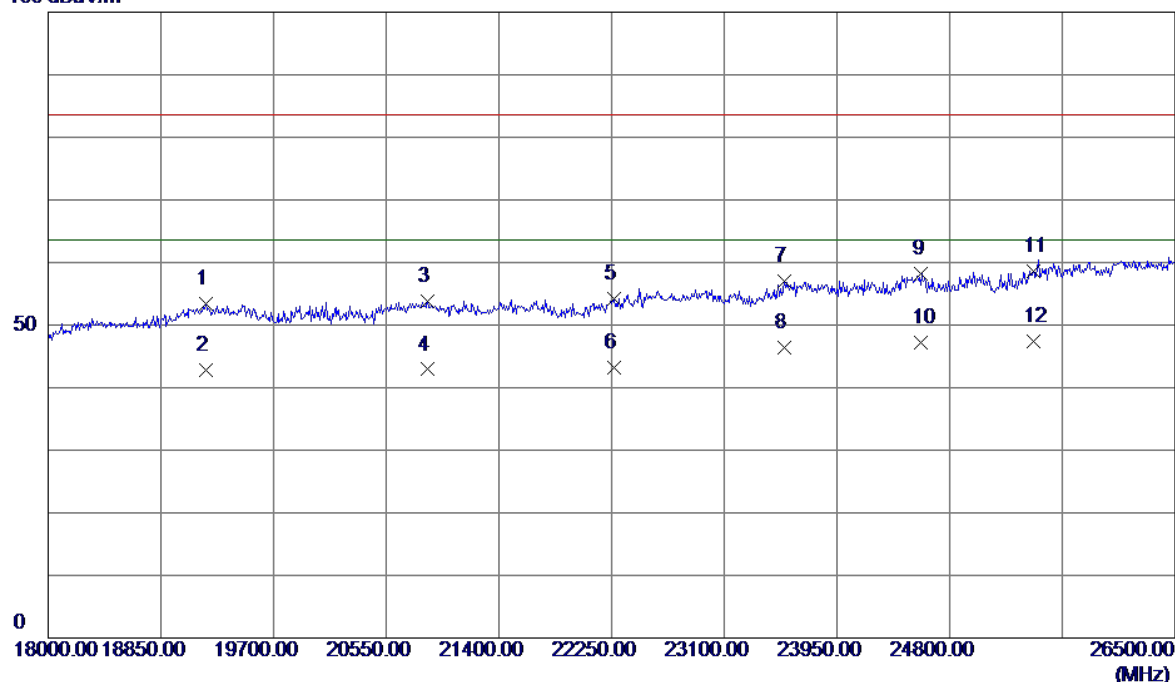

| No.  | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector |
|------|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|
| 1    | 19190.0000   | 50.07                      | 3.38                    | 53.45                     | 83.50           | -30.05       | Peak     |
| 2    | 19190.0000   | 39.45                      | 3.38                    | 42.83                     | 63.50           | -20.67       | AVG      |
| 3    | 20864.5000   | 51.17                      | 2.69                    | 53.86                     | 83.50           | -29.64       | Peak     |
| 4    | 20864.5000   | 40.21                      | 2.69                    | 42.90                     | 63.50           | -20.60       | AVG      |
| 5    | 22267.0000   | 50.51                      | 3.63                    | 54.14                     | 83.50           | -29.36       | Peak     |
| 6    | 22267.0000   | 39.54                      | 3.63                    | 43.17                     | 63.50           | -20.33       | AVG      |
| 7    | 23550.5000   | 53.14                      | 3.88                    | 57.02                     | 83.50           | -26.48       | Peak     |
| 8    | 23550.5000   | 42.51                      | 3.88                    | 46.39                     | 63.50           | -17.11       | AVG      |
| 9    | 24587.5000   | 54.31                      | 3.96                    | 58.27                     | 83.50           | -25.23       | Peak     |
| 10   | 24587.5000   | 43.26                      | 3.96                    | 47.22                     | 63.50           | -16.28       | AVG      |
| 11   | 25429.0000   | 53.68                      | 4.86                    | 58.54                     | 83.50           | -24.96       | Peak     |
| 12 * | 25429.0000   | 42.51                      | 4.86                    | 47.37                     | 63.50           | -16.13       | AVG      |

|               |                                                                   |                   |            |
|---------------|-------------------------------------------------------------------|-------------------|------------|
| EUT           | Smart Phone                                                       | Model Name        | MHA-L29    |
| Temperature   | 25°C                                                              | Relative Humidity | 60%        |
| Test Voltage  | AC 120V/60Hz                                                      | Polarization      | Horizontal |
| Test Mode     | Adapter+Idle+BT+5G WIFI+GPS+Camera on+Earphone                    |                   |            |
| Note          | Adapter:Salcomp(US)+Honglin +Battery: Desay+ Earphone: Lianchuang |                   |            |
| Test Engineer | Kevin Li                                                          |                   |            |


100 dBuV/m

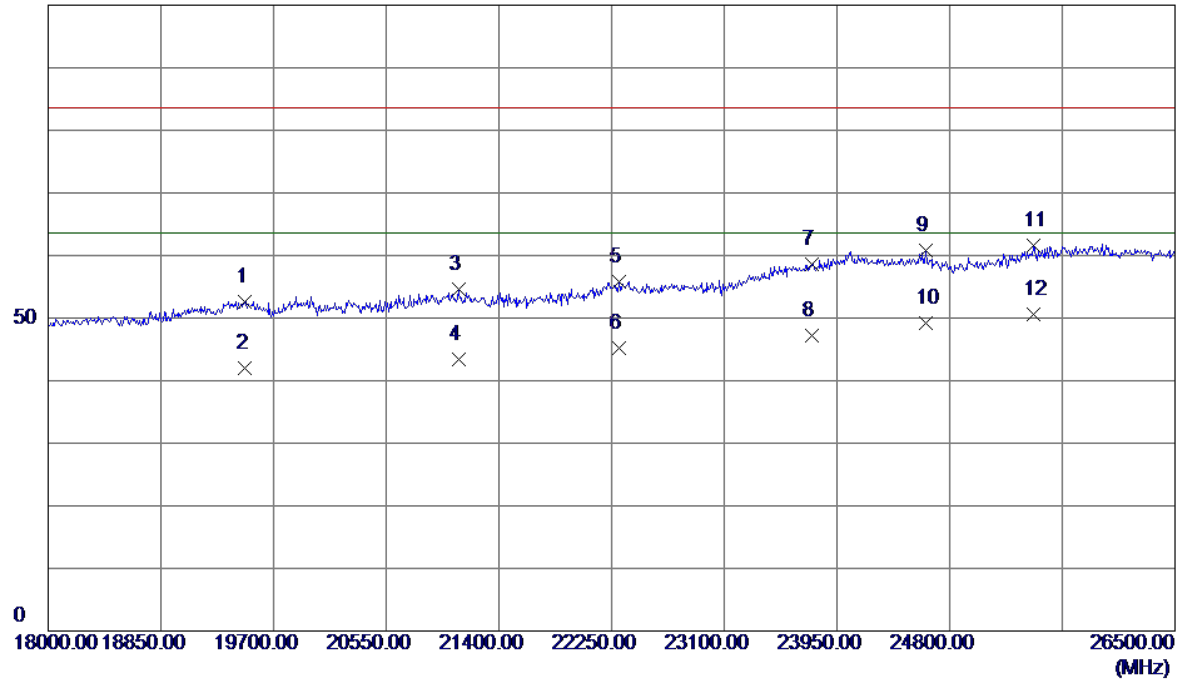

| No.  | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector |
|------|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|
| 1    | 19487.5000   | 49.18                      | 3.42                    | 52.60                     | 83.50           | -30.90       | Peak     |
| 2    | 19487.5000   | 38.56                      | 3.42                    | 41.98                     | 63.50           | -21.52       | AVG      |
| 3    | 21094.0000   | 51.53                      | 3.08                    | 54.61                     | 83.50           | -28.89       | Peak     |
| 4    | 21094.0000   | 40.25                      | 3.08                    | 43.33                     | 63.50           | -20.17       | AVG      |
| 5    | 22309.5000   | 52.08                      | 3.63                    | 55.71                     | 83.50           | -27.79       | Peak     |
| 6    | 22309.5000   | 41.51                      | 3.63                    | 45.14                     | 63.50           | -18.36       | AVG      |
| 7    | 23763.0000   | 54.93                      | 3.61                    | 58.54                     | 83.50           | -24.96       | Peak     |
| 8    | 23763.0000   | 43.65                      | 3.61                    | 47.26                     | 63.50           | -16.24       | AVG      |
| 9    | 24621.5000   | 56.80                      | 3.98                    | 60.78                     | 83.50           | -22.72       | Peak     |
| 10   | 24621.5000   | 45.18                      | 3.98                    | 49.16                     | 63.50           | -14.34       | AVG      |
| 11   | 25429.0000   | 56.67                      | 4.86                    | 61.53                     | 83.50           | -21.97       | Peak     |
| 12 * | 25429.0000   | 45.82                      | 4.86                    | 50.68                     | 63.50           | -12.82       | AVG      |

|               |                                                                   |                   |          |
|---------------|-------------------------------------------------------------------|-------------------|----------|
| EUT           | Smart Phone                                                       | Model Name        | MHA-L29  |
| Temperature   | 25°C                                                              | Relative Humidity | 60%      |
| Test Voltage  | AC 120V/60Hz                                                      | Polarization      | Vertical |
| Test Mode     | Adapter+Idle+BT+5G WIFI+GPS+Camera on+Earphone                    |                   |          |
| Note          | Adapter:Salcomp(US)+Honglin +Battery: Desay+ Earphone: Lianchuang |                   |          |
| Test Engineer | Kevin Li                                                          |                   |          |


100 dBuV/m

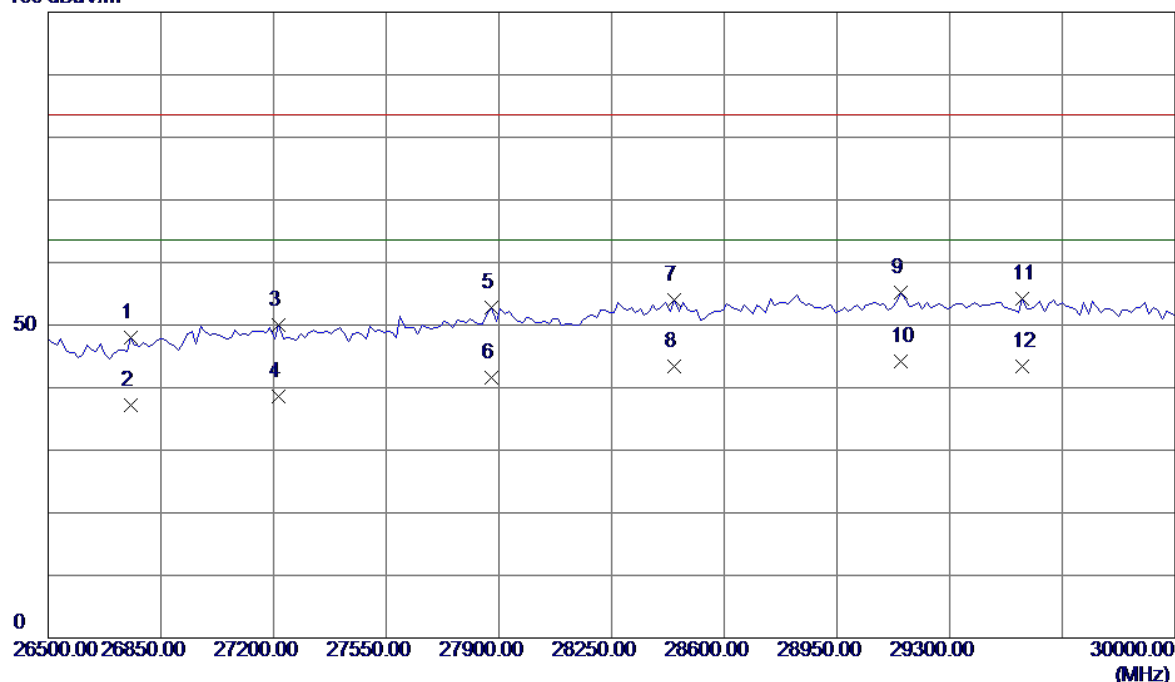

| No.  | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector |
|------|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|
| 1    | 26756.7570   | 44.07                      | 3.94                    | 48.01                     | 83.50           | -35.49       | Peak     |
| 2    | 26756.7570   | 33.25                      | 3.94                    | 37.19                     | 63.50           | -26.31       | AVG      |
| 3    | 27216.2160   | 46.50                      | 3.48                    | 49.98                     | 83.50           | -33.52       | Peak     |
| 4    | 27216.2160   | 35.11                      | 3.48                    | 38.59                     | 63.50           | -24.91       | AVG      |
| 5    | 27878.3780   | 48.80                      | 3.97                    | 52.77                     | 83.50           | -30.73       | Peak     |
| 6    | 27878.3780   | 37.58                      | 3.97                    | 41.55                     | 63.50           | -21.95       | AVG      |
| 7    | 28445.9460   | 49.04                      | 4.87                    | 53.91                     | 83.50           | -29.59       | Peak     |
| 8    | 28445.9460   | 38.45                      | 4.87                    | 43.32                     | 63.50           | -20.18       | AVG      |
| 9    | 29148.6490   | 49.53                      | 5.67                    | 55.20                     | 83.50           | -28.30       | Peak     |
| 10 * | 29148.6490   | 38.47                      | 5.67                    | 44.14                     | 63.50           | -19.36       | AVG      |
| 11   | 29527.0270   | 48.07                      | 6.05                    | 54.12                     | 83.50           | -29.38       | Peak     |
| 12   | 29527.0270   | 37.41                      | 6.05                    | 43.46                     | 63.50           | -20.04       | AVG      |

|               |                                                                   |                   |            |
|---------------|-------------------------------------------------------------------|-------------------|------------|
| EUT           | Smart Phone                                                       | Model Name        | MHA-L29    |
| Temperature   | 25°C                                                              | Relative Humidity | 60%        |
| Test Voltage  | AC 120V/60Hz                                                      | Polarization      | Horizontal |
| Test Mode     | Adapter+Idle+BT+5G WIFI+GPS+Camera on+Earphone                    |                   |            |
| Note          | Adapter:Salcomp(US)+Honglin +Battery: Desay+ Earphone: Lianchuang |                   |            |
| Test Engineer | Kevin Li                                                          |                   |            |


100 dBuV/m

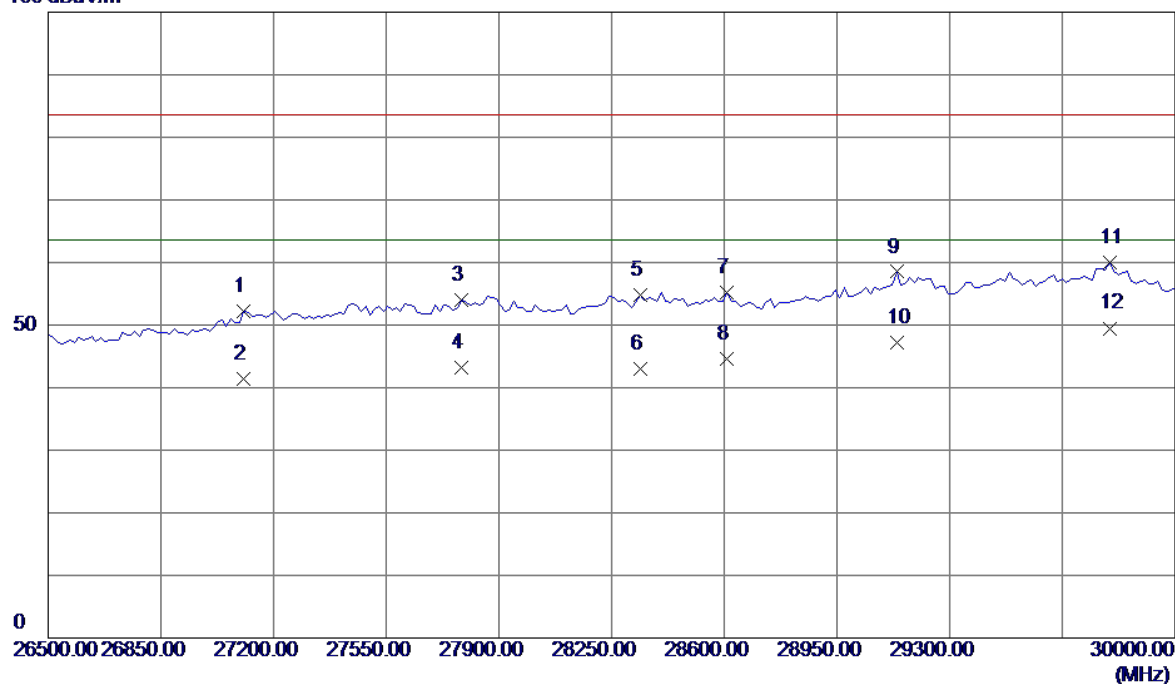

| No.  | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector |
|------|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|
| 1    | 27108.1080   | 48.44                      | 3.80                    | 52.24                     | 83.50           | -31.26       | Peak     |
| 2    | 27108.1080   | 37.59                      | 3.80                    | 41.39                     | 63.50           | -22.11       | AVG      |
| 3    | 27783.7840   | 50.28                      | 3.64                    | 53.92                     | 83.50           | -29.58       | Peak     |
| 4    | 27783.7840   | 39.58                      | 3.64                    | 43.22                     | 63.50           | -20.28       | AVG      |
| 5    | 28337.8380   | 49.97                      | 4.76                    | 54.73                     | 83.50           | -28.77       | Peak     |
| 6    | 28337.8380   | 38.15                      | 4.76                    | 42.91                     | 63.50           | -20.59       | AVG      |
| 7    | 28608.1080   | 50.21                      | 5.06                    | 55.27                     | 83.50           | -28.23       | Peak     |
| 8    | 28608.1080   | 39.63                      | 5.06                    | 44.69                     | 63.50           | -18.81       | AVG      |
| 9    | 29135.1350   | 52.84                      | 5.66                    | 58.50                     | 83.50           | -25.00       | Peak     |
| 10   | 29135.1350   | 41.52                      | 5.66                    | 47.18                     | 63.50           | -16.32       | AVG      |
| 11   | 29797.2970   | 53.03                      | 6.92                    | 59.95                     | 83.50           | -23.55       | Peak     |
| 12 * | 29797.2970   | 42.58                      | 6.92                    | 49.50                     | 63.50           | -14.00       | AVG      |

|               |                                             |                   |          |
|---------------|---------------------------------------------|-------------------|----------|
| EUT           | Smart Phone                                 | Model Name        | MHA-L29  |
| Temperature   | 25°C                                        | Relative Humidity | 60%      |
| Test Voltage  | AC 120V/60Hz                                | Polarization      | Vertical |
| Test Mode     | Adapter+Idle+Playing+Speaker                |                   |          |
| Note          | Adapter:Salcomp(US)+Honglin +Battery: Desay |                   |          |
| Test Engineer | Kevin Li                                    |                   |          |


80 dBuV/m

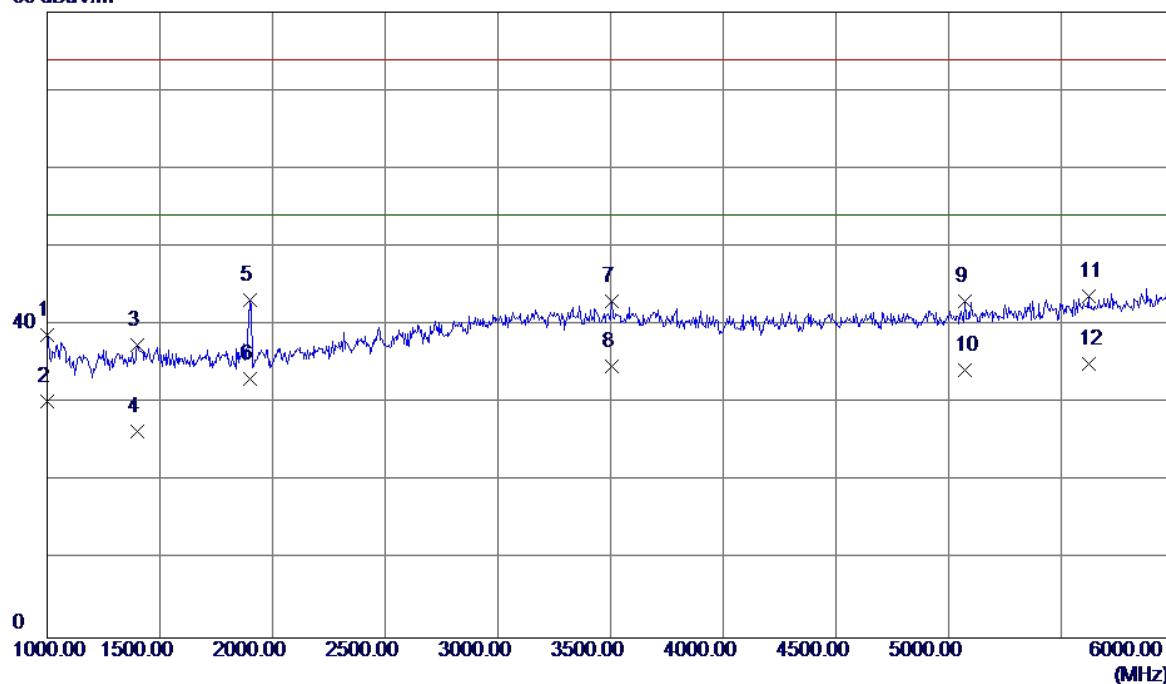

| No.  | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector |
|------|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|
| 1    | 1000.0000    | 44.16                      | -5.48                   | 38.68                     | 74.00           | -35.32       | Peak     |
| 2    | 1000.0000    | 35.68                      | -5.48                   | 30.20                     | 54.00           | -23.80       | AVG      |
| 3    | 1400.0000    | 41.29                      | -3.81                   | 37.48                     | 74.00           | -36.52       | Peak     |
| 4    | 1400.0000    | 30.24                      | -3.81                   | 26.43                     | 54.00           | -27.57       | AVG      |
| 5    | 1897.5000    | 45.12                      | -1.90                   | 43.22                     | 74.00           | -30.78       | Peak     |
| 6    | 1897.5000    | 34.97                      | -1.90                   | 33.07                     | 54.00           | -20.93       | AVG      |
| 7    | 3507.5000    | 37.58                      | 5.44                    | 43.02                     | 74.00           | -30.98       | Peak     |
| 8    | 3507.5000    | 29.35                      | 5.44                    | 34.79                     | 54.00           | -19.21       | AVG      |
| 9    | 5072.5000    | 35.37                      | 7.65                    | 43.02                     | 74.00           | -30.98       | Peak     |
| 10   | 5072.5000    | 26.55                      | 7.65                    | 34.20                     | 54.00           | -19.80       | AVG      |
| 11   | 5622.5000    | 34.08                      | 9.66                    | 43.74                     | 74.00           | -30.26       | Peak     |
| 12 * | 5622.5000    | 25.39                      | 9.66                    | 35.05                     | 54.00           | -18.95       | AVG      |


|               |                                             |                   |            |
|---------------|---------------------------------------------|-------------------|------------|
| EUT           | Smart Phone                                 | Model Name        | MHA-L29    |
| Temperature   | 25°C                                        | Relative Humidity | 60%        |
| Test Voltage  | AC 120V/60Hz                                | Polarization      | Horizontal |
| Test Mode     | Adapter+Idle+Playing+Speaker                |                   |            |
| Note          | Adapter:Salcomp(US)+Honglin +Battery: Desay |                   |            |
| Test Engineer | Kevin Li                                    |                   |            |

80 dBuV/m

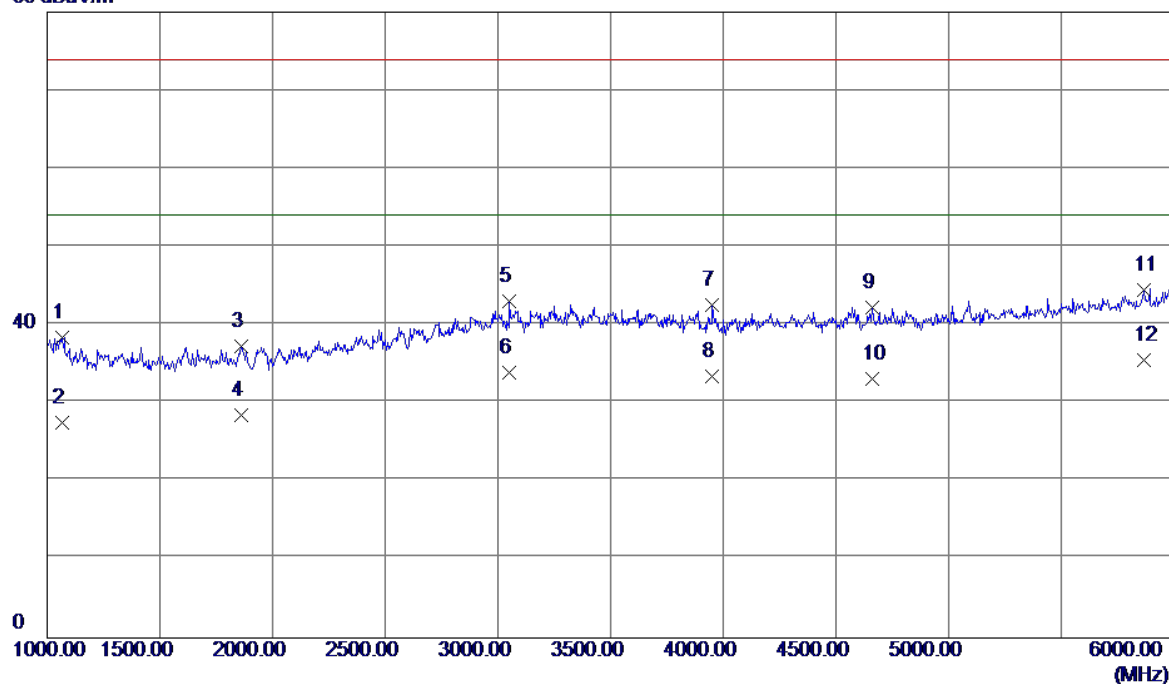


| No.  | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector |
|------|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|
| 1    | 1065.0000    | 43.58                      | -5.21                   | 38.37                     | 74.00           | -35.63       | Peak     |
| 2    | 1065.0000    | 32.69                      | -5.21                   | 27.48                     | 54.00           | -26.52       | AVG      |
| 3    | 1860.0000    | 39.28                      | -2.05                   | 37.23                     | 74.00           | -36.77       | Peak     |
| 4    | 1860.0000    | 30.49                      | -2.05                   | 28.44                     | 54.00           | -25.56       | AVG      |
| 5    | 3052.5000    | 38.80                      | 4.28                    | 43.08                     | 74.00           | -30.92       | Peak     |
| 6    | 3052.5000    | 29.67                      | 4.28                    | 33.95                     | 54.00           | -20.05       | AVG      |
| 7    | 3950.0000    | 36.99                      | 5.59                    | 42.58                     | 74.00           | -31.42       | Peak     |
| 8    | 3950.0000    | 27.91                      | 5.59                    | 33.50                     | 54.00           | -20.50       | AVG      |
| 9    | 4660.0000    | 35.52                      | 6.77                    | 42.29                     | 74.00           | -31.71       | Peak     |
| 10   | 4660.0000    | 26.36                      | 6.77                    | 33.13                     | 54.00           | -20.87       | AVG      |
| 11   | 5867.5000    | 33.91                      | 10.59                   | 44.50                     | 74.00           | -29.50       | Peak     |
| 12 * | 5867.5000    | 24.97                      | 10.59                   | 35.56                     | 54.00           | -18.44       | AVG      |

|               |                                                                   |                   |          |
|---------------|-------------------------------------------------------------------|-------------------|----------|
| EUT           | Smart Phone                                                       | Model Name        | MHA-L29  |
| Temperature   | 25°C                                                              | Relative Humidity | 60%      |
| Test Voltage  | AC 120V/60Hz                                                      | Polarization      | Vertical |
| Test Mode     | Adapter+Traffic (GSM)+ Earphone                                   |                   |          |
| Note          | Adapter:Salcomp(US)+Honglin +Battery: Desay+ Earphone: Lianchuang |                   |          |
| Test Engineer | Kevin Li                                                          |                   |          |

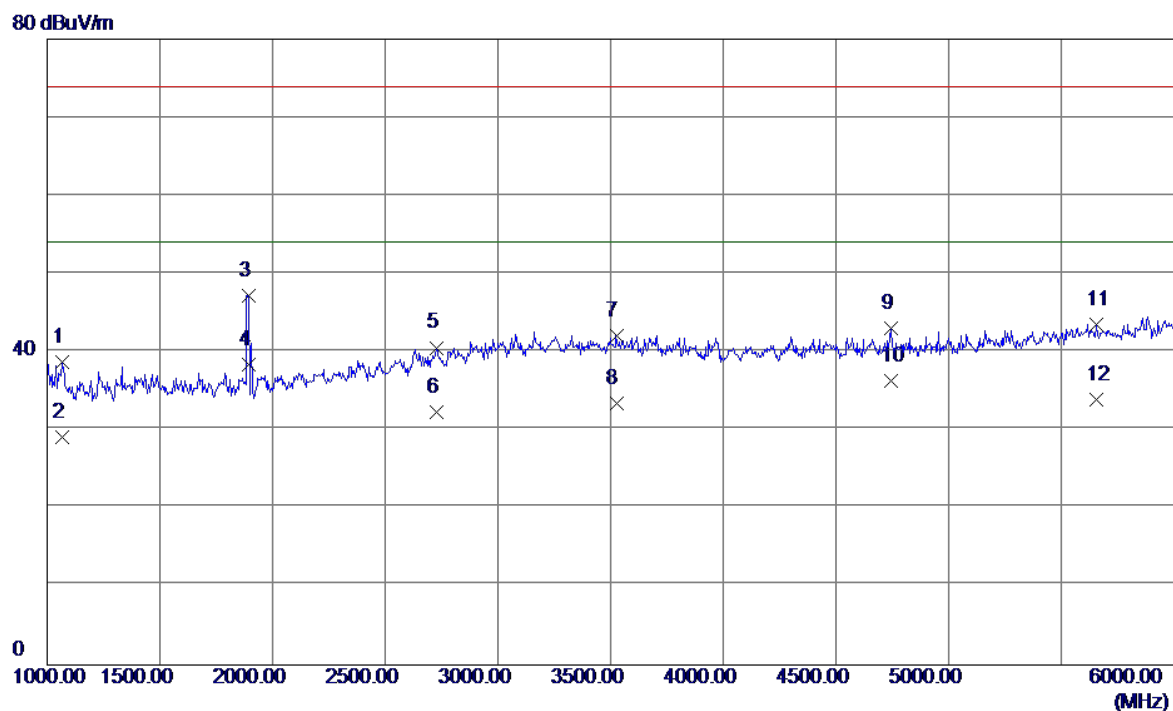

| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|
| 1   | 1065.0000    | 43.99                      | -5.21                   | 38.78                     | 74.00           | -35.22       | Peak     |
| 2   | 1065.0000    | 34.26                      | -5.21                   | 29.05                     | 54.00           | -24.95       | AVG      |
| 3   | 1892.5000    | 49.15                      | -1.92                   | 47.23                     | 74.00           | -26.77       | Peak     |
| 4 * | 1892.5000    | 40.34                      | -1.92                   | 38.42                     | 54.00           | -15.58       | AVG      |
| 5   | 2727.5000    | 38.05                      | 2.51                    | 40.56                     | 74.00           | -33.44       | Peak     |
| 6   | 2727.5000    | 29.85                      | 2.51                    | 32.36                     | 54.00           | -21.64       | AVG      |
| 7   | 3525.0000    | 36.63                      | 5.44                    | 42.07                     | 74.00           | -31.93       | Peak     |
| 8   | 3525.0000    | 27.94                      | 5.44                    | 33.38                     | 54.00           | -20.62       | AVG      |
| 9   | 4742.5000    | 36.06                      | 6.92                    | 42.98                     | 74.00           | -31.02       | Peak     |
| 10  | 4742.5000    | 29.36                      | 6.92                    | 36.28                     | 54.00           | -17.72       | AVG      |
| 11  | 5655.0000    | 33.81                      | 9.78                    | 43.59                     | 74.00           | -30.41       | Peak     |
| 12  | 5655.0000    | 24.18                      | 9.78                    | 33.96                     | 54.00           | -20.04       | AVG      |


|               |                                                                   |                   |            |
|---------------|-------------------------------------------------------------------|-------------------|------------|
| EUT           | Smart Phone                                                       | Model Name        | MHA-L29    |
| Temperature   | 25°C                                                              | Relative Humidity | 60%        |
| Test Voltage  | AC 120V/60Hz                                                      | Polarization      | Horizontal |
| Test Mode     | Adapter+Traffic (GSM)+ Earphone                                   |                   |            |
| Note          | Adapter:Salcomp(US)+Honglin +Battery: Desay+ Earphone: Lianchuang |                   |            |
| Test Engineer | Kevin Li                                                          |                   |            |

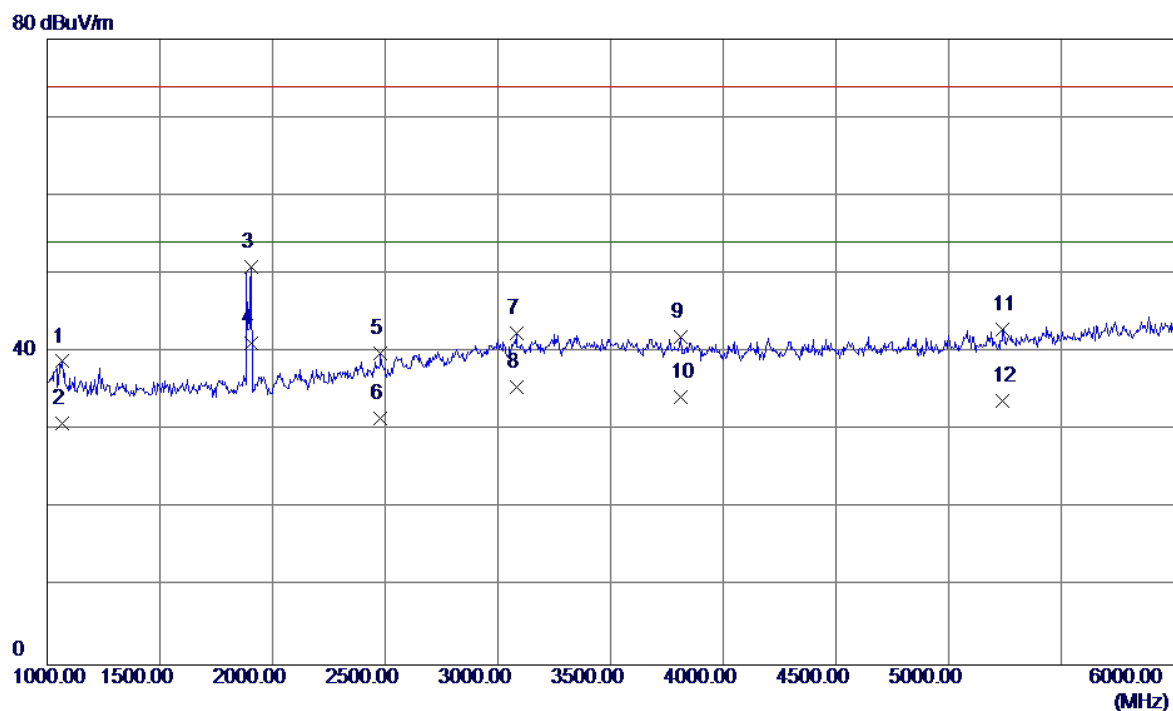

| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|
| 1   | 1065.0000    | 44.01                      | -5.21                   | 38.80                     | 74.00           | -35.20       | Peak     |
| 2   | 1065.0000    | 36.16                      | -5.21                   | 30.95                     | 54.00           | -23.05       | AVG      |
| 3   | 1905.0000    | 52.75                      | -1.88                   | 50.87                     | 74.00           | -23.13       | Peak     |
| 4 * | 1905.0000    | 42.96                      | -1.88                   | 41.08                     | 54.00           | -12.92       | AVG      |
| 5   | 2480.0000    | 38.81                      | 1.05                    | 39.86                     | 74.00           | -34.14       | Peak     |
| 6   | 2480.0000    | 30.47                      | 1.05                    | 31.52                     | 54.00           | -22.48       | AVG      |
| 7   | 3082.5000    | 38.10                      | 4.35                    | 42.45                     | 74.00           | -31.55       | Peak     |
| 8   | 3082.5000    | 31.21                      | 4.35                    | 35.56                     | 54.00           | -18.44       | AVG      |
| 9   | 3810.0000    | 36.43                      | 5.54                    | 41.97                     | 74.00           | -32.03       | Peak     |
| 10  | 3810.0000    | 28.69                      | 5.54                    | 34.23                     | 54.00           | -19.77       | AVG      |
| 11  | 5240.0000    | 34.64                      | 8.26                    | 42.90                     | 74.00           | -31.10       | Peak     |
| 12  | 5240.0000    | 25.43                      | 8.26                    | 33.69                     | 54.00           | -20.31       | AVG      |

|               |                                             |                   |          |
|---------------|---------------------------------------------|-------------------|----------|
| EUT           | Smart Phone                                 | Model Name        | MHA-L29  |
| Temperature   | 25°C                                        | Relative Humidity | 60%      |
| Test Voltage  | AC 120V/60Hz                                | Polarization      | Vertical |
| Test Mode     | Adapter+Traffic (WCDMA)                     |                   |          |
| Note          | Adapter:Salcomp(US)+Honglin +Battery: Desay |                   |          |
| Test Engineer | Kevin Li                                    |                   |          |


80 dBuV/m

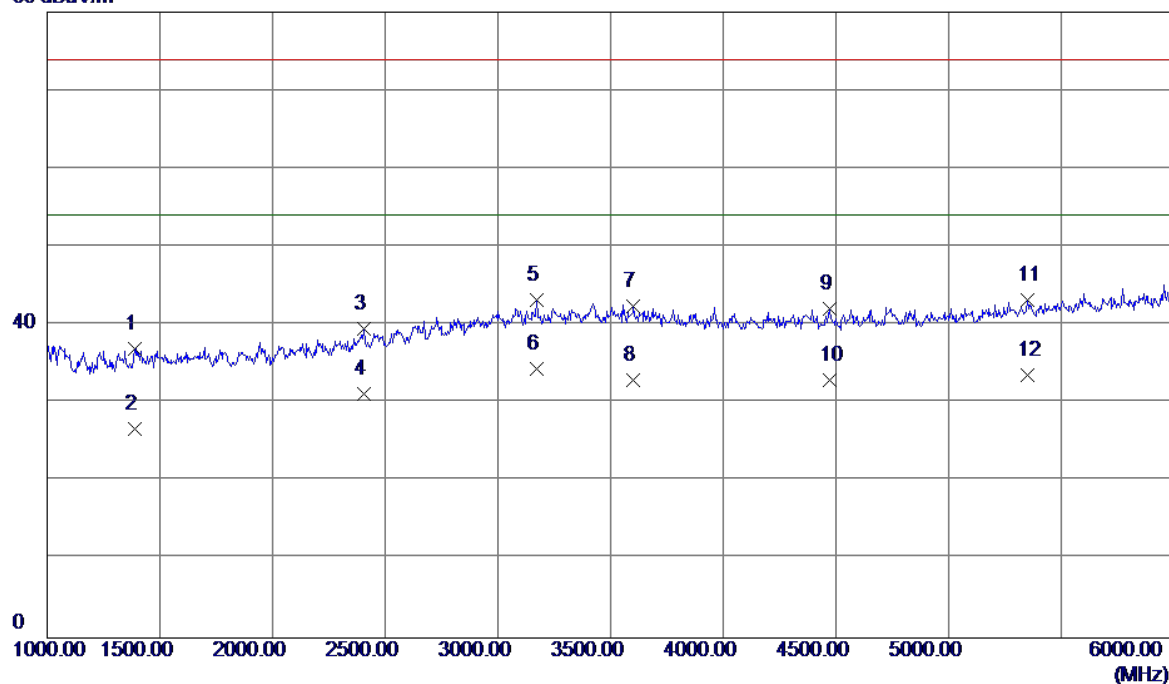

| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|
| 1   | 1387.5000    | 40.88                      | -3.86                   | 37.02                     | 74.00           | -36.98       | Peak     |
| 2   | 1387.5000    | 30.61                      | -3.86                   | 26.75                     | 54.00           | -27.25       | AVG      |
| 3   | 2407.5000    | 38.90                      | 0.66                    | 39.56                     | 74.00           | -34.44       | Peak     |
| 4   | 2407.5000    | 30.54                      | 0.66                    | 31.20                     | 54.00           | -22.80       | AVG      |
| 5   | 3170.0000    | 38.68                      | 4.58                    | 43.26                     | 74.00           | -30.74       | Peak     |
| 6 * | 3170.0000    | 29.86                      | 4.58                    | 34.44                     | 54.00           | -19.56       | AVG      |
| 7   | 3602.5000    | 36.88                      | 5.47                    | 42.35                     | 74.00           | -31.65       | Peak     |
| 8   | 3602.5000    | 27.50                      | 5.47                    | 32.97                     | 54.00           | -21.03       | AVG      |
| 9   | 4472.5000    | 35.63                      | 6.44                    | 42.07                     | 74.00           | -31.93       | Peak     |
| 10  | 4472.5000    | 26.55                      | 6.44                    | 32.99                     | 54.00           | -21.01       | AVG      |
| 11  | 5350.0000    | 34.51                      | 8.65                    | 43.16                     | 74.00           | -30.84       | Peak     |
| 12  | 5350.0000    | 24.97                      | 8.65                    | 33.62                     | 54.00           | -20.38       | AVG      |

|               |                                             |                   |            |
|---------------|---------------------------------------------|-------------------|------------|
| EUT           | Smart Phone                                 | Model Name        | MHA-L29    |
| Temperature   | 25°C                                        | Relative Humidity | 60%        |
| Test Voltage  | AC 120V/60Hz                                | Polarization      | Horizontal |
| Test Mode     | Adapter+Traffic (WCDMA)                     |                   |            |
| Note          | Adapter:Salcomp(US)+Honglin +Battery: Desay |                   |            |
| Test Engineer | Kevin Li                                    |                   |            |


80 dBuV/m

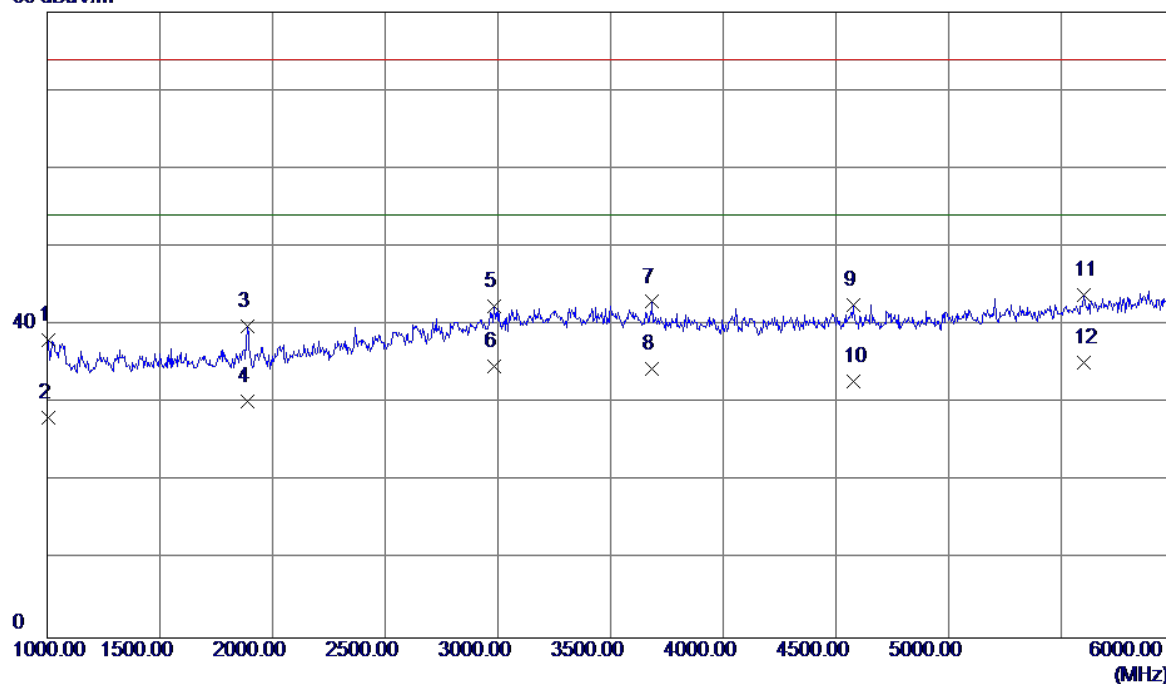

| No.  | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector |
|------|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|
| 1    | 1005.0000    | 43.53                      | -5.46                   | 38.07                     | 74.00           | -35.93       | Peak     |
| 2    | 1005.0000    | 33.68                      | -5.46                   | 28.22                     | 54.00           | -25.78       | AVG      |
| 3    | 1887.5000    | 41.79                      | -1.94                   | 39.85                     | 74.00           | -34.15       | Peak     |
| 4    | 1887.5000    | 32.15                      | -1.94                   | 30.21                     | 54.00           | -23.79       | AVG      |
| 5    | 2982.5000    | 38.32                      | 4.04                    | 42.36                     | 74.00           | -31.64       | Peak     |
| 6    | 2982.5000    | 30.72                      | 4.04                    | 34.76                     | 54.00           | -19.24       | AVG      |
| 7    | 3685.0000    | 37.46                      | 5.50                    | 42.96                     | 74.00           | -31.04       | Peak     |
| 8    | 3685.0000    | 28.94                      | 5.50                    | 34.44                     | 54.00           | -19.56       | AVG      |
| 9    | 4577.5000    | 35.97                      | 6.63                    | 42.60                     | 74.00           | -31.40       | Peak     |
| 10   | 4577.5000    | 26.23                      | 6.63                    | 32.86                     | 54.00           | -21.14       | AVG      |
| 11   | 5602.5000    | 34.28                      | 9.58                    | 43.86                     | 74.00           | -30.14       | Peak     |
| 12 * | 5602.5000    | 25.66                      | 9.58                    | 35.24                     | 54.00           | -18.76       | AVG      |

|               |                                             |                   |          |
|---------------|---------------------------------------------|-------------------|----------|
| EUT           | Smart Phone                                 | Model Name        | MHA-L29  |
| Temperature   | 25°C                                        | Relative Humidity | 60%      |
| Test Voltage  | AC 120V/60Hz                                | Polarization      | Vertical |
| Test Mode     | Adapter+Traffic (LTE)                       |                   |          |
| Note          | Adapter:Salcomp(US)+Honglin +Battery: Desay |                   |          |
| Test Engineer | Kevin Li                                    |                   |          |


80 dBuV/m

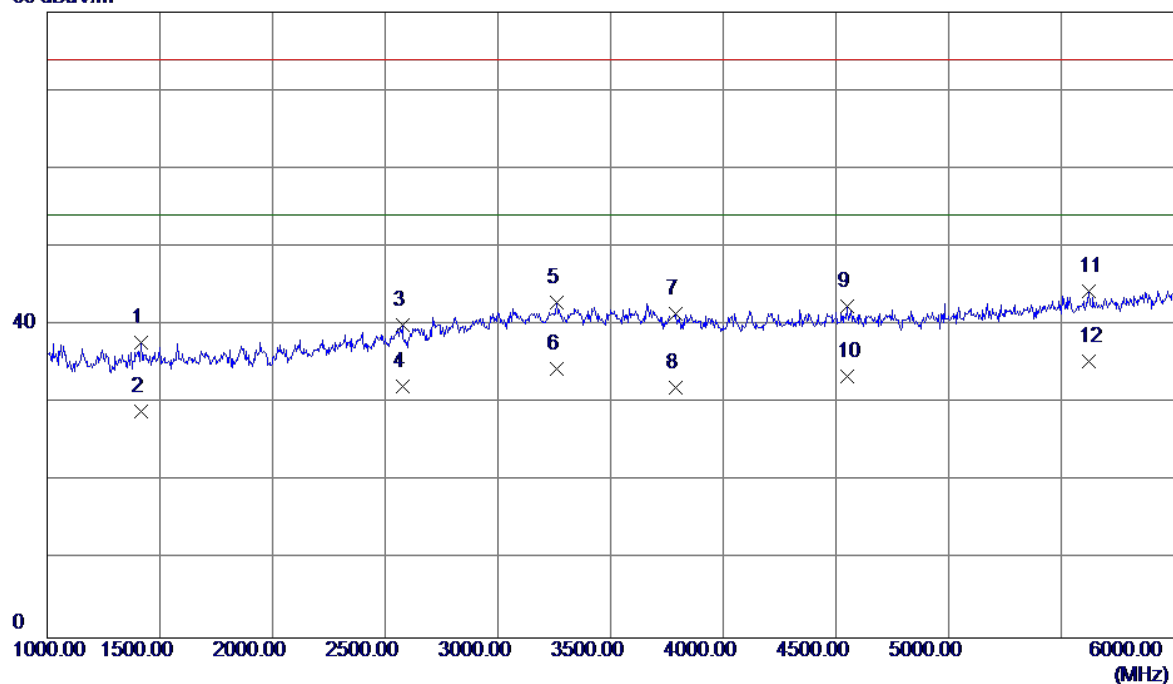

| No.  | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector |
|------|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|
| 1    | 1417.5000    | 41.45                      | -3.74                   | 37.71                     | 74.00           | -36.29       | Peak     |
| 2    | 1417.5000    | 32.65                      | -3.74                   | 28.91                     | 54.00           | -25.09       | AVG      |
| 3    | 2577.5000    | 38.42                      | 1.62                    | 40.04                     | 74.00           | -33.96       | Peak     |
| 4    | 2577.5000    | 30.47                      | 1.62                    | 32.09                     | 54.00           | -21.91       | AVG      |
| 5    | 3260.0000    | 38.09                      | 4.81                    | 42.90                     | 74.00           | -31.10       | Peak     |
| 6    | 3260.0000    | 29.63                      | 4.81                    | 34.44                     | 54.00           | -19.56       | AVG      |
| 7    | 3790.0000    | 35.86                      | 5.54                    | 41.40                     | 74.00           | -32.60       | Peak     |
| 8    | 3790.0000    | 26.41                      | 5.54                    | 31.95                     | 54.00           | -22.05       | AVG      |
| 9    | 4547.5000    | 35.85                      | 6.57                    | 42.42                     | 74.00           | -31.58       | Peak     |
| 10   | 4547.5000    | 26.89                      | 6.57                    | 33.46                     | 54.00           | -20.54       | AVG      |
| 11   | 5622.5000    | 34.68                      | 9.66                    | 44.34                     | 74.00           | -29.66       | Peak     |
| 12 * | 5622.5000    | 25.67                      | 9.66                    | 35.33                     | 54.00           | -18.67       | AVG      |

|               |                                             |                   |            |
|---------------|---------------------------------------------|-------------------|------------|
| EUT           | Smart Phone                                 | Model Name        | MHA-L29    |
| Temperature   | 25°C                                        | Relative Humidity | 60%        |
| Test Voltage  | AC 120V/60Hz                                | Polarization      | Horizontal |
| Test Mode     | Adapter+Traffic (LTE)                       |                   |            |
| Note          | Adapter:Salcomp(US)+Honglin +Battery: Desay |                   |            |
| Test Engineer | Kevin Li                                    |                   |            |

80 dBuV/m

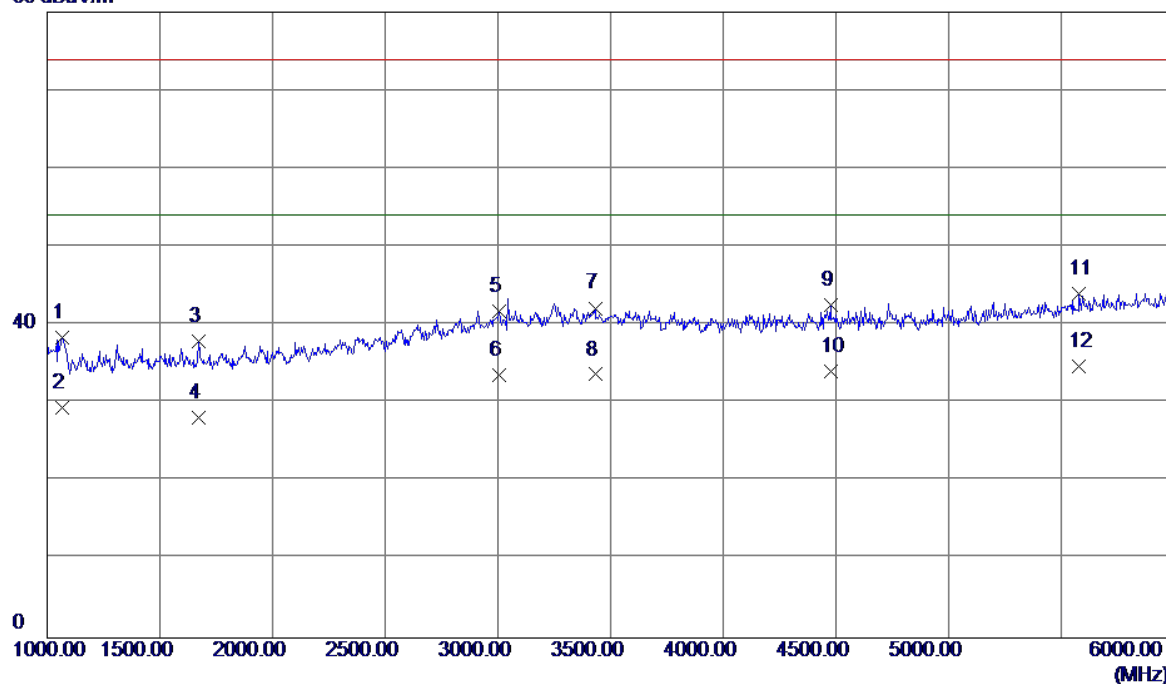

| No.  | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector |
|------|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|
| 1    | 1065.0000    | 43.61                      | -5.21                   | 38.40                     | 74.00           | -35.60       | Peak     |
| 2    | 1065.0000    | 34.62                      | -5.21                   | 29.41                     | 54.00           | -24.59       | AVG      |
| 3    | 1672.5000    | 40.60                      | -2.75                   | 37.85                     | 74.00           | -36.15       | Peak     |
| 4    | 1672.5000    | 30.85                      | -2.75                   | 28.10                     | 54.00           | -25.90       | AVG      |
| 5    | 3005.0000    | 37.65                      | 4.15                    | 41.80                     | 74.00           | -32.20       | Peak     |
| 6    | 3005.0000    | 29.42                      | 4.15                    | 33.57                     | 54.00           | -20.43       | AVG      |
| 7    | 3432.5000    | 36.90                      | 5.26                    | 42.16                     | 74.00           | -31.84       | Peak     |
| 8    | 3432.5000    | 28.42                      | 5.26                    | 33.68                     | 54.00           | -20.32       | AVG      |
| 9    | 4477.5000    | 36.14                      | 6.45                    | 42.59                     | 74.00           | -31.41       | Peak     |
| 10   | 4477.5000    | 27.68                      | 6.45                    | 34.13                     | 54.00           | -19.87       | AVG      |
| 11   | 5580.0000    | 34.47                      | 9.50                    | 43.97                     | 74.00           | -30.03       | Peak     |
| 12 * | 5580.0000    | 25.29                      | 9.50                    | 34.79                     | 54.00           | -19.21       | AVG      |