

**Appendix B. SAR Measurement Plots**

Table of contents
GSM850 Head
GSM850 Body
GSM1900 Head
GSM1900 Body
UMTS Band V Head
UMTS Band V Body
UMTS Band IV Head
UMTS Band IV Body
UMTS Band II Head
UMTS Band II Body
LTE Band V Head
LTE Band V Body
LTE Band IV Head
LTE Band IV Body
LTE Band II Head
LTE Band II Body
LTE Band VII Head
LTE Band VII Body
Wi-Fi 2.4G Head
Wi-Fi 2.4G Body
Wi-Fi 5G Head
Wi-Fi 5G Body

Test Laboratory: HUAWEI SAR/HAC Lab

MT7-L09 GSM850 190CH Right hand touch cheek -Secondary Antenna

DUT: MT7-L09; Type: Smart Phone; Serial: SAR1

Communication System: UID 0, HW-GSM\GPRS\EGPRS-1TS (0); Frequency: 836.6 MHz; Duty Cycle: 1:8.30042

Medium parameters used: $f = 837$ MHz; $\sigma = 0.929$ S/m; $\epsilon_r = 40.878$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY Configuration:

- Probe: EX3DV4 - SN3898; ConvF(10.32, 10.32, 10.32); Calibrated: 2014-3-10;
- Sensor-Surface: 3mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE4 Sn852; Calibrated: 2014-4-30
- Phantom: SAM3; Type: SAM; Serial: TP-1597
- DASY52 52.8(1222); SEMCAD X 14.6.10(7164)

Configuration/Head/Area Scan (8x13x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 0.573 W/kg


Configuration/Head/Zoom Scan (6x6x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 17.379 V/m; Power Drift = 0.02 dB

Peak SAR (extrapolated) = 1.21 W/kg

SAR(1 g) = 0.560 W/kg; SAR(10 g) = 0.320 W/kg

Maximum value of SAR (measured) = 0.713 W/kg

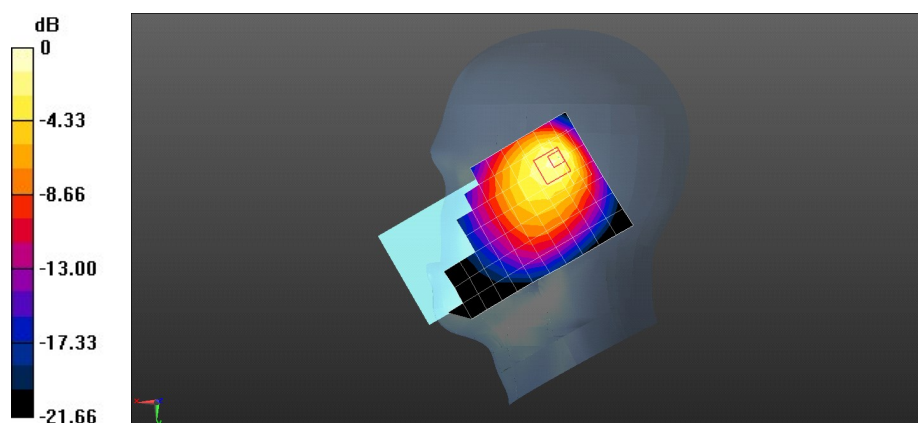

0 dB = 0.713 W/kg = -1.47 dBW/kg

Test Laboratory: HUAWEI SAR/HAC Lab

MT7-L09 GSM850 190CH Back side 15mm -Main Antenna

DUT: MT7-L09; Type: Smart Phone; Serial: SAR1

Communication System: UID 0, HW-GSM\GPRS\EGPRS-1TS (0); Frequency: 836.6 MHz; Duty Cycle: 1:8.30042

Medium parameters used: $f = 837$ MHz; $\sigma = 0.958$ S/m; $\epsilon_r = 53.371$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3736; ConvF(9.08, 9.08, 9.08); Calibrated: 2014-4-24;
- Sensor-Surface: 3mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE4 Sn1236; Calibrated: 2013-11-25
- Phantom: SAM1; Type: SAM; Serial: TP-1475
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7164)

Configuration/Body/Area Scan (9x14x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 0.162 W/kg


Configuration/Body/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 12.666 V/m; Power Drift = 0.08 dB

Peak SAR (extrapolated) = 0.186 W/kg

SAR(1 g) = 0.150 W/kg; SAR(10 g) = 0.117 W/kg

Maximum value of SAR (measured) = 0.164 W/kg

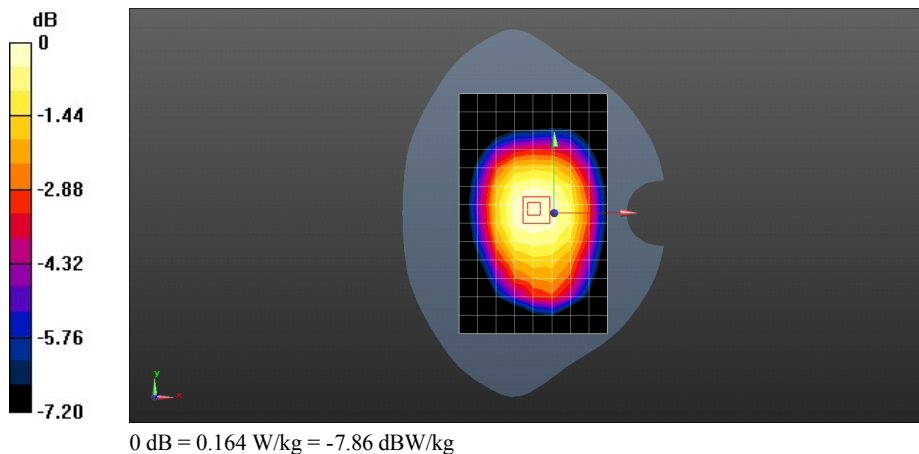

Test Laboratory: HUAWEI SAR/HAC Lab

MT7-L09 GSM850 GPRS 2TS 190CH Back side 10mm -Main Antenna

DUT: MT7-L09 Type: Smart Phone; Serial: SAR1

Communication System: UID 0, HW-GSM\GPRS\EGPRS-2TS (0); Frequency: 836.6 MHz; Duty Cycle: 1:4.10015

Medium parameters used: $f = 837$ MHz; $\sigma = 0.958$ S/m; $\epsilon_r = 53.371$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3736; ConvF(9.08, 9.08, 9.08); Calibrated: 2014-4-24;
- Sensor-Surface: 3mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE4 Sn1236; Calibrated: 2013-11-25
- Phantom: SAM1; Type: SAM; Serial: TP-1475
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7164)

Configuration/Body/Area Scan (9x14x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 0.266 W/kg

Configuration/Body/Zoom Scan (7x12x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 16.341 V/m; Power Drift = -0.04 dB

Peak SAR (extrapolated) = 0.346 W/kg

SAR(1 g) = 0.246 W/kg; SAR(10 g) = 0.194 W/kg


Maximum value of SAR (measured) = 0.268 W/kg

Configuration/Body/Zoom Scan (7x12x7)/Cube 1: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 16.341 V/m; Power Drift = -0.04 dB

Peak SAR (extrapolated) = 0.307 W/kg

SAR(1 g) = 0.246 W/kg; SAR(10 g) = 0.194 W/kg

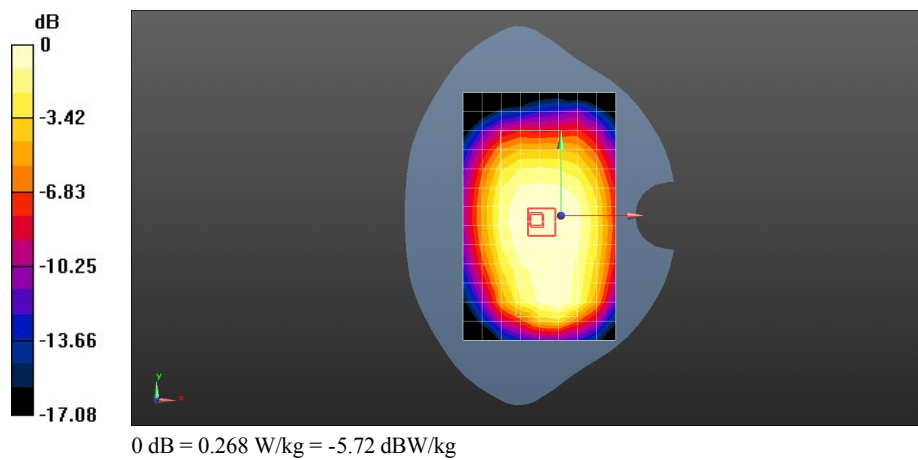

Test Laboratory: HUAWEI SAR/HAC Lab

MT7-L09 GSM1900 810CH Right hand touch cheek with battery 2# -Secondary Antenna

DUT: MT7-L09; Type: Smart Phone; Serial: SAR1

Communication System: UID 0, HW-GSM\GPRS\EGPRS-1TS (0); Frequency: 1909.8 MHz; Duty Cycle: 1:8.30042

Medium parameters used: $f = 1910$ MHz; $\sigma = 1.386$ S/m; $\epsilon_r = 40.673$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY Configuration:

- Probe: EX3DV4 - SN3898; ConvF(8.2, 8.2, 8.2); Calibrated: 2014-3-10;
- Sensor-Surface: 3mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE4 Sn852; Calibrated: 2014-4-30
- Phantom: SAM4; Type: SAM; Serial: TP-1620
- DASY52 52.8(1222); SEMCAD X 14.6.10(7164)

Configuration/Head/Area Scan (8x13x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 0.725 W/kg


Configuration/Head/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 11.515 V/m; Power Drift = 0.03 dB

Peak SAR (extrapolated) = 1.20 W/kg

SAR(1 g) = 0.556 W/kg; SAR(10 g) = 0.241 W/kg

Maximum value of SAR (measured) = 0.750 W/kg

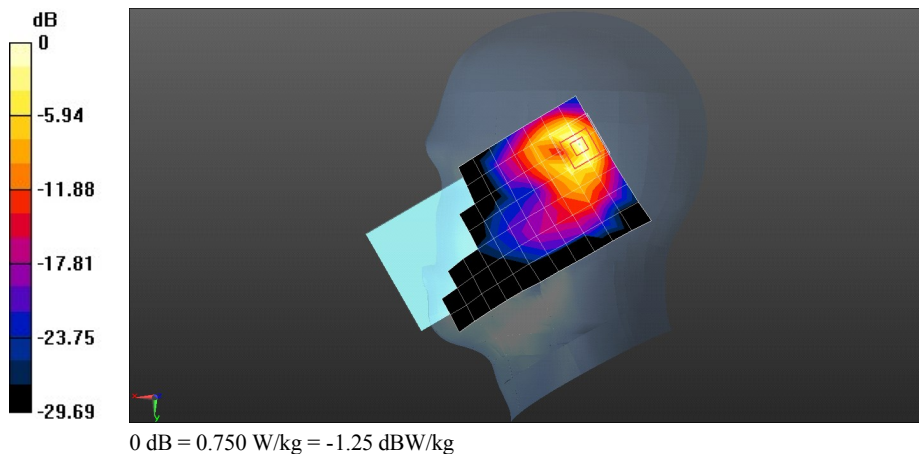

Test Laboratory: HUAWEI SAR/HAC Lab

MT7-L09 GSM1900 661CH Back side 15mm -Main Antenna

DUT: MT7-L09; Type: Smart Phone; Serial: SAR1

Communication System: UID 0, HW-GSM\GPRS\EGPRS-1TS (0); Frequency: 1880 MHz;Duty Cycle: 1:8.30042

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.51$ S/m; $\epsilon_r = 51.135$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3736; ConvF(7.35, 7.35, 7.35); Calibrated: 2014-4-24;
- Sensor-Surface: 3mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE4 Sn1236; Calibrated: 2013-11-25
- Phantom: SAM2; Type: SAM; Serial: TP:1474
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7164)

Configuration/Body/Area Scan (9x14x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 0.300 W/kg


Configuration/Body/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 4.159 V/m; Power Drift = 0.16 dB

Peak SAR (extrapolated) = 0.455 W/kg

SAR(1 g) = 0.271 W/kg; SAR(10 g) = 0.148 W/kg

Maximum value of SAR (measured) = 0.333 W/kg

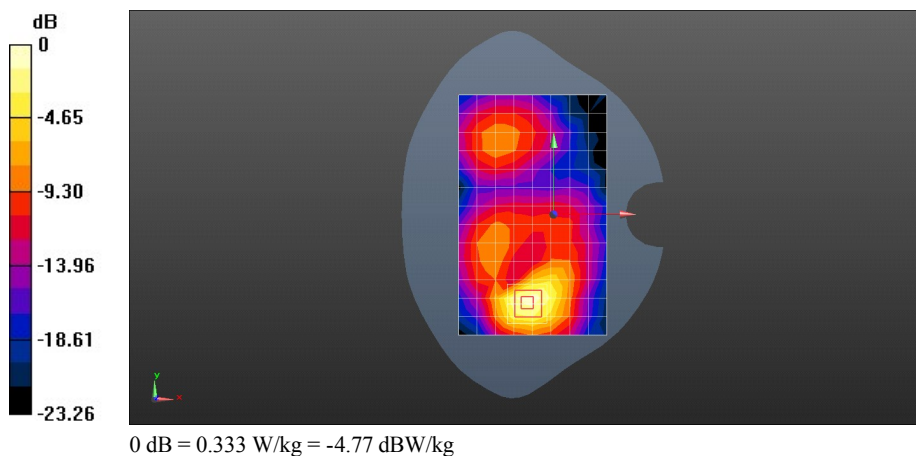

Test Laboratory: HUAWEI SAR/HAC Lab

MT7-L09 GSM1900GPRS 2TS 661CH Bottom side 10mm with battery 2# -Main Antenna

DUT: MT7-L09; Type: Smart Phone; Serial: SAR1

Communication System: UID 0, HW-GSM\GPRS\EGPRS-2TS (0); Frequency: 1880 MHz; Duty Cycle: 1:4.10015

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.51$ S/m; $\epsilon_r = 51.135$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3736; ConvF(7.35, 7.35, 7.35); Calibrated: 2014-4-24;
- Sensor-Surface: 3mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE4 Sn1236; Calibrated: 2013-11-25
- Phantom: SAM2; Type: SAM; Serial: TP:1474
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7164)

Configuration/Body/Area Scan (7x14x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 0.697 W/kg


Configuration/Body/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 9.373 V/m; Power Drift = -0.08 dB

Peak SAR (extrapolated) = 1.04 W/kg

SAR(1 g) = 0.591 W/kg; SAR(10 g) = 0.300 W/kg

Maximum value of SAR (measured) = 0.752 W/kg

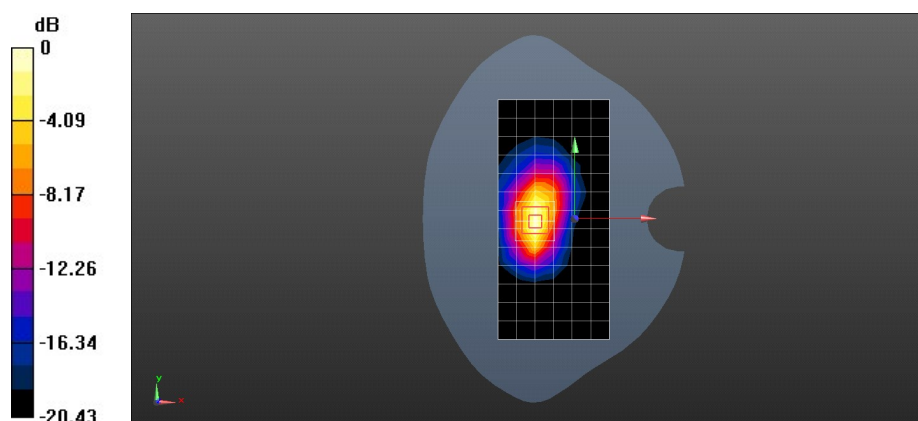

Test Laboratory: HUAWEI SAR/HAC Lab

MT7-L09 UMTS Band V 4132CH Right hand touch check -Secondary Antenna

DUT: MT7-L09; Type: Smart Phone; Serial: SAR1

Communication System: UID 0, HW-UMTS-FDD(WCDMA) (0); Frequency: 826.4 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 826.4$ MHz; $\sigma = 0.92$ S/m; $\epsilon_r = 41.027$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY Configuration:

- Probe: EX3DV4 - SN3898; ConvF(10.32, 10.32, 10.32); Calibrated: 2014-3-10;
- Sensor-Surface: 3mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE4 Sn852; Calibrated: 2014-4-30
- Phantom: SAM3; Type: SAM; Serial: TP-1597
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7164)

Configuration/Head/Area Scan (8x13x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.610 W/kg

Configuration/Head/Zoom Scan (6x6x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm


Reference Value = 17.417 V/m; Power Drift = 0.12 dB

Peak SAR (extrapolated) = 1.31 W/kg

SAR(1 g) = 0.599 W/kg; SAR(10 g) = 0.341 W/kg

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.759 W/kg

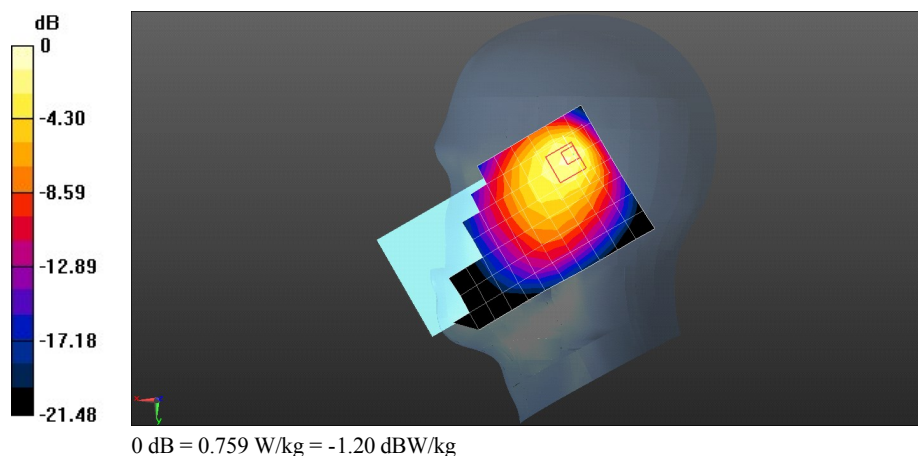

Test Laboratory: HUAWEI SAR/HAC Lab

MT7-L09 UMTS Band V 4182CH Back side 15mm -Main Antenna

DUT: MT7-L09; Type: Smart Phone; Serial: SAR1

Communication System: UID 0, HW-UMTS-FDD(WCDMA) (0); Frequency: 836.4 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 836.4$ MHz; $\sigma = 0.957$ S/m; $\epsilon_r = 53.378$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3736; ConvF(9.08, 9.08, 9.08); Calibrated: 2014-4-24;
- Sensor-Surface: 3mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE4 Sn1236; Calibrated: 2013-11-25
- Phantom: SAM1; Type: SAM; Serial: TP-1475
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7164)

Configuration/Body/Area Scan (9x14x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.201 W/kg

Configuration/Body/Zoom Scan (6x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm


Reference Value = 13.996 V/m; Power Drift = 0.07 dB

Peak SAR (extrapolated) = 0.231 W/kg

SAR(1 g) = 0.185 W/kg; SAR(10 g) = 0.144 W/kg

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.202 W/kg

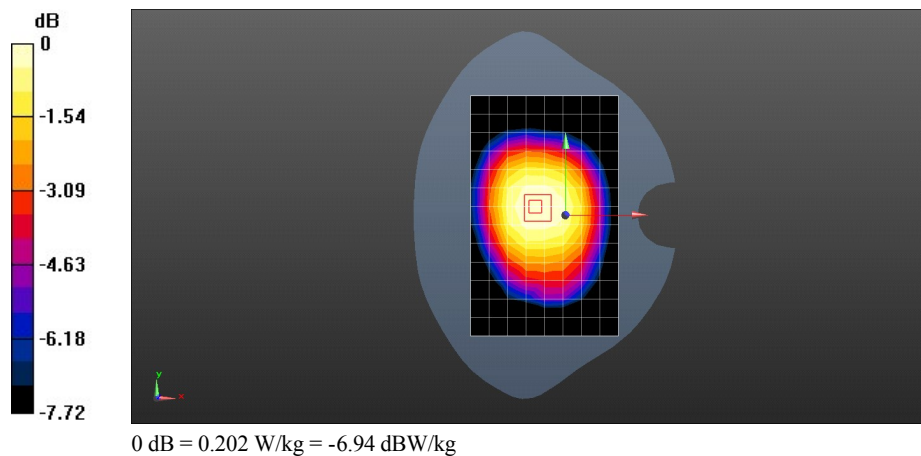

Test Laboratory: HUAWEI SAR/HAC Lab

MT7-L09 UMTS Band V 4182CH Back side 10mm -Main Antenna

DUT: MT7-L09; Type: Smart Phone; Serial: SAR1

Communication System: UID 0, HW-UMTS-FDD(WCDMA) (0); Frequency: 836.4 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 836.4$ MHz; $\sigma = 0.957$ S/m; $\epsilon_r = 53.378$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3736; ConvF(9.08, 9.08, 9.08); Calibrated: 2014-4-24;
- Sensor-Surface: 3mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE4 Sn1236; Calibrated: 2013-11-25
- Phantom: SAM1; Type: SAM; Serial: TP-1475
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7164)

Configuration/Body/Area Scan (9x14x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.231 W/kg

Configuration/Body/Zoom Scan (6x6x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm


Reference Value = 15.126 V/m; Power Drift = 0.03 dB

Peak SAR (extrapolated) = 0.266 W/kg

SAR(1 g) = 0.213 W/kg; SAR(10 g) = 0.167 W/kg

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.233 W/kg

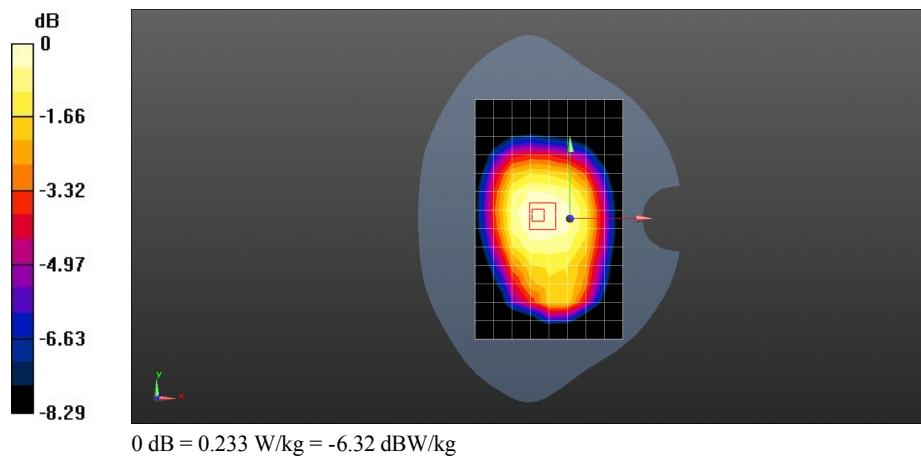

Test Laboratory: HUAWEI SAR/HAC Lab

MT7-L09 UMTS Band IV 1513CH Right hand touch cheek with battery 2# -Secondary Antenna

DUT: MT7-L09; Type: Smart Phone; Serial: SAR1

Communication System: UID 0, HW-UMTS-FDD(WCDMA) (0); Frequency: 1752.6 MHz;Duty Cycle: 1:1

Medium parameters used: $f = 1753$ MHz; $\sigma = 1.344$ S/m; $\epsilon_r = 40.705$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY Configuration:

- Probe: EX3DV4 - SN3898; ConvF(8.38, 8.38, 8.38); Calibrated: 2014-3-10;
- Sensor-Surface: 3mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE4 Sn852; Calibrated: 2014-4-30
- Phantom: SAM3; Type: SAM; Serial: TP-1597
- DASY52 52.8(1222); SEMCAD X 14.6.10(7164)

Configuration/Head/Area Scan (8x13x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 0.371 W/kg


Configuration/Head/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 10.059 V/m; Power Drift = 0.19 dB

Peak SAR (extrapolated) = 0.688 W/kg

SAR(1 g) = 0.305 W/kg; SAR(10 g) = 0.136 W/kg

Maximum value of SAR (measured) = 0.390 W/kg

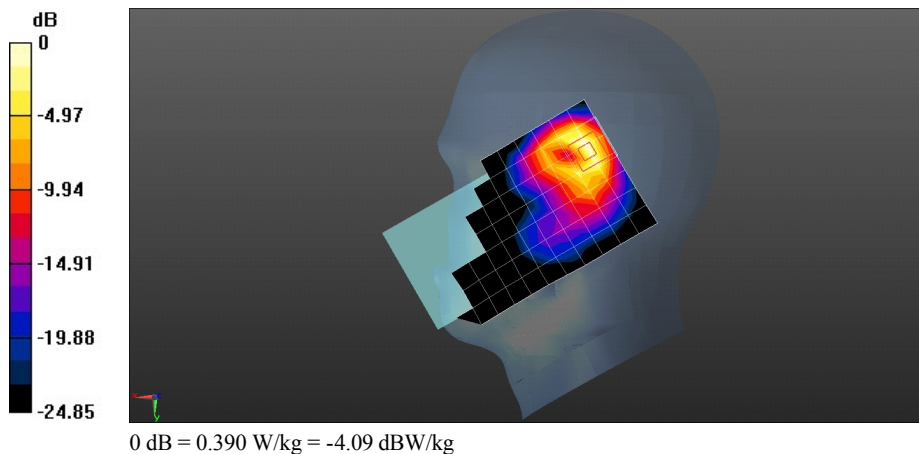

Test Laboratory: HUAWEI SAR/HAC Lab

MT7-L09 UMTS Band IV 1413CH Back side 15mm with battery 2#

DUT: MT7-L09; Type: Smart Phone; Serial: SAR1

Communication System: UID 0, HW-UMTS-FDD(WCDMA) (0); Frequency: 1732.6 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1733$ MHz; $\sigma = 1.5$ S/m; $\epsilon_r = 51.72$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: ES3DV3 - SN3168; ConvF(4.94, 4.94, 4.94); Calibrated: 2013-9-30;
- Sensor-Surface: 3mm (Mechanical Surface Detection), $z = 2.0, 32.0$
- Electronics: DAE4 Sn1236; Calibrated: 2013-11-25
- Phantom: SAM1; Type: SAM; Serial: TP-1475
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7164)

Configuration/Body/Area Scan (9x14x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 0.768 W/kg


Configuration/Body/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 2.084 V/m; Power Drift = -0.11 dB

Peak SAR (extrapolated) = 1.40 W/kg

SAR(1 g) = 0.849 W/kg; SAR(10 g) = 0.476 W/kg

Maximum value of SAR (measured) = 1.03 W/kg

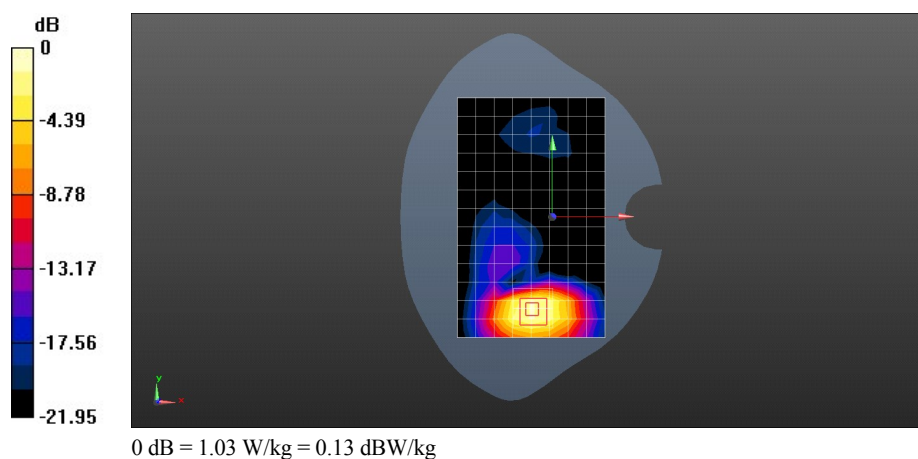

Test Laboratory: HUAWEI SAR/HAC Lab

MT7-L09 UMTS Band IV 1413CH Bottom side 10mm -Main Antenna

DUT: MT7-L09; Type: Smart Phone; Serial: SAR1

Communication System: UID 0, HW-UMTS-FDD(WCDMA) (0); Frequency: 1732.6 MHz;Duty Cycle: 1:1

Medium parameters used: $f = 1733 \text{ MHz}$; $\sigma = 1.5 \text{ S/m}$; $\epsilon_r = 51.72$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY Configuration:

- Probe: ES3DV3 - SN3168; ConvF(4.94, 4.94, 4.94); Calibrated: 2013-9-30;
- Sensor-Surface: 3mm (Mechanical Surface Detection), $z = 2.0, 32.0$
- Electronics: DAE4 Sn1236; Calibrated: 2013-11-25
- Phantom: SAM1; Type: SAM; Serial: TP-1475
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7164)

Configuration/Body/Area Scan (6x9x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (measured) = 1.16 W/kg


Configuration/Body/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 20.084 V/m ; Power Drift = 0.14 dB

Peak SAR (extrapolated) = 1.65 W/kg

SAR(1 g) = 0.955 W/kg ; SAR(10 g) = 0.502 W/kg

Maximum value of SAR (measured) = 1.17 W/kg

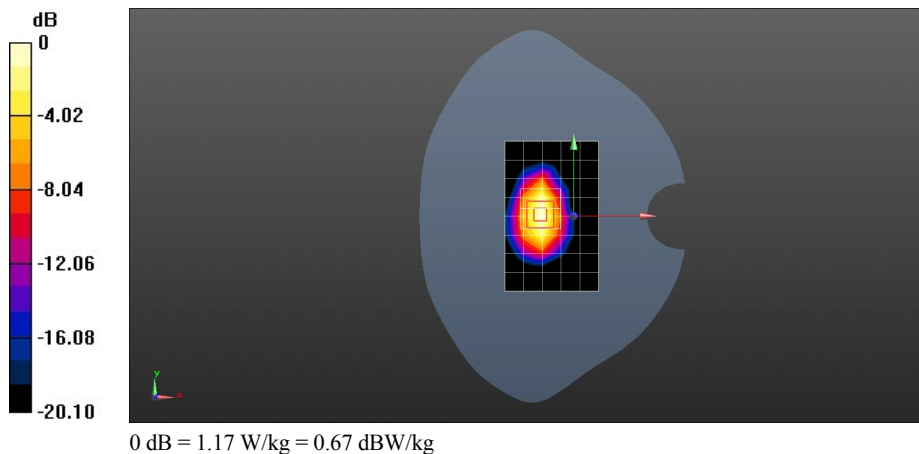

Test Laboratory: HUAWEI SAR/HAC Lab

MT7-L09 UMTS Band II 9262CH Right hand touch cheek -Secondary Antenna

DUT: MT7-L09; Type: Smart Phone; Serial: SAR1

Communication System: UID 0, HW-UMTS-FDD(WCDMA) (0); Frequency: 1852.4 MHz;Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 1852.4$ MHz; $\sigma = 1.331$ S/m; $\epsilon_r = 40.87$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY Configuration:

- Probe: EX3DV4 - SN3898; ConvF(8.2, 8.2, 8.2); Calibrated: 2014-3-10;
- Sensor-Surface: 3mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE4 Sn852; Calibrated: 2014-4-30
- Phantom: SAM4; Type: SAM; Serial: TP-1620
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7164)

Configuration/Head/Area Scan (9x14x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.608 W/kg

Configuration/Head/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm


Reference Value = 12.599 V/m; Power Drift = -0.17 dB

Peak SAR (extrapolated) = 1.32 W/kg

SAR(1 g) = 0.574 W/kg; SAR(10 g) = 0.248 W/kg

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.737 W/kg

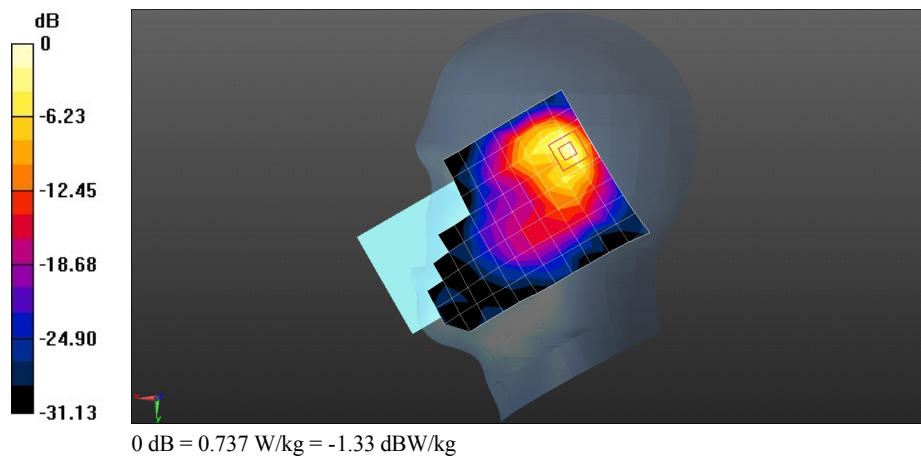

Test Laboratory: HUAWEI SAR/HAC Lab

MT7-L09 UMTS Band II 9400CH Back side 15mm -Main Antenna

DUT: MT7-L09; Type: Smart Phone; Serial: SAR1

Communication System: UID 0, HW-UMTS-FDD(WCDMA) (0); Frequency: 1880 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.51$ S/m; $\epsilon_r = 51.135$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3736; ConvF(7.35, 7.35, 7.35); Calibrated: 2014-4-24;
- Sensor-Surface: 3mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE4 Sn1236; Calibrated: 2013-11-25
- Phantom: SAM2; Type: SAM; Serial: TP:1474
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7164)

Configuration/Body/Area Scan (9x14x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 0.636 W/kg


Configuration/Body/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 5.471 V/m; Power Drift = 0.08 dB

Peak SAR (extrapolated) = 1.00 W/kg

SAR(1 g) = 0.595 W/kg; SAR(10 g) = 0.325 W/kg

Maximum value of SAR (measured) = 0.726 W/kg

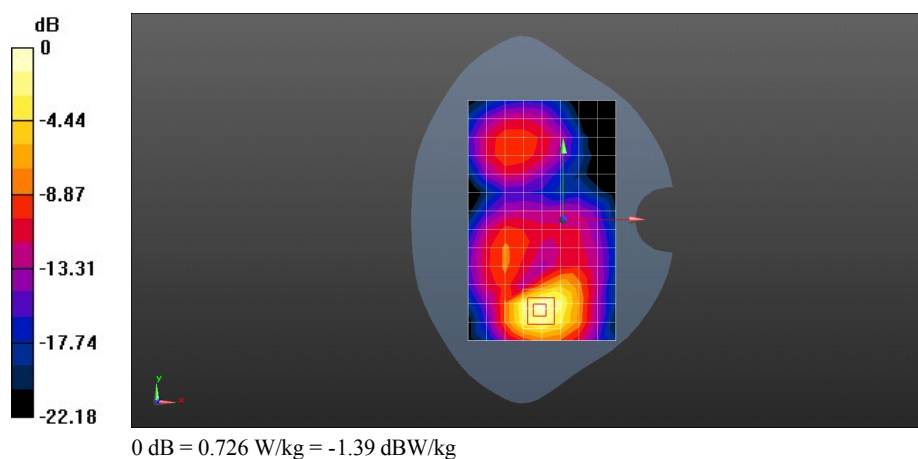

Test Laboratory: HUAWEI SAR/HAC Lab

MT7-L09 UMTS Band II 9262CH Bottom Side-repeated 10mm with battery 2# -Main Antenna

DUT: MT7-L09; Type: Smart Phone; Serial: SAR1

Communication System: UID 0, HW-UMTS-FDD(WCDMA) (0); Frequency: 1852.4 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 1852.4$ MHz; $\sigma = 1.487$ S/m; $\epsilon_r = 51.234$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3736; ConvF(7.35, 7.35, 7.35); Calibrated: 2014-4-24;
- Sensor-Surface: 3mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE4 Sn1236; Calibrated: 2013-11-25
- Phantom: SAM2; Type: SAM; Serial: TP:1474
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7164)

Configuration/Body/Area Scan (7x11x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.658 W/kg

Configuration/Body/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm


Reference Value = 20.290 V/m; Power Drift = -0.03 dB

Peak SAR (extrapolated) = 1.43 W/kg

SAR(1 g) = 0.810 W/kg; SAR(10 g) = 0.415 W/kg

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 1.02 W/kg

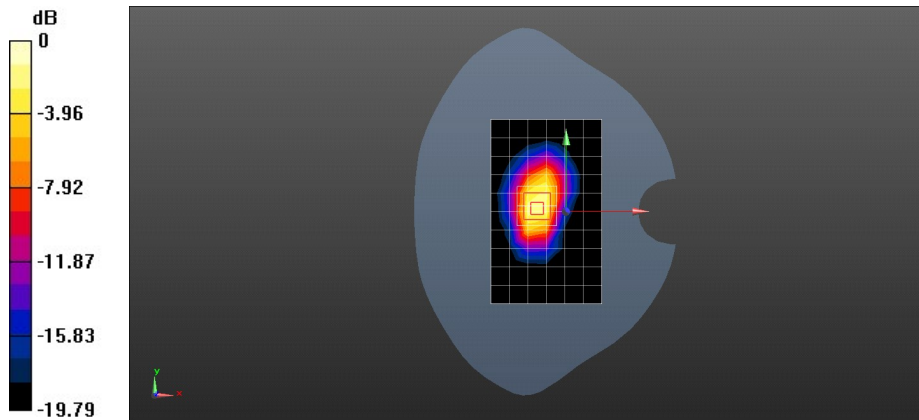

0 dB = 1.02 W/kg = 0.08 dBW/kg

Test Laboratory: HUAWEI SAR/HAC Lab

MT7-L09 LTE Band V 10M QPSK 50%RB#13 20525CH Right hand touch cheek with battery 2# -Secondary Antenna

DUT: MT7-L09; Type: Smart Phone; Serial: SAR1

Communication System: UID 0, LTE-FDD (SC-FDMA, 10MHz, QPSK/16-QAM) (0); Frequency: 836.5 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 836.5$ MHz; $\sigma = 0.928$ S/m; $\epsilon_r = 40.885$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY Configuration:

- Probe: EX3DV4 - SN3898; ConvF(10.32, 10.32, 10.32); Calibrated: 2014-3-10;
- Sensor-Surface: 3mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE4 Sn852; Calibrated: 2014-4-30
- Phantom: SAM3; Type: SAM; Serial: TP-1597
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7164)

Configuration/Head/Area Scan (8x13x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.615 W/kg

Configuration/Head/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm


Reference Value = 18.142 V/m; Power Drift = -0.15 dB

Peak SAR (extrapolated) = 1.30 W/kg

SAR(1 g) = 0.584 W/kg; SAR(10 g) = 0.325 W/kg

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.738 W/kg

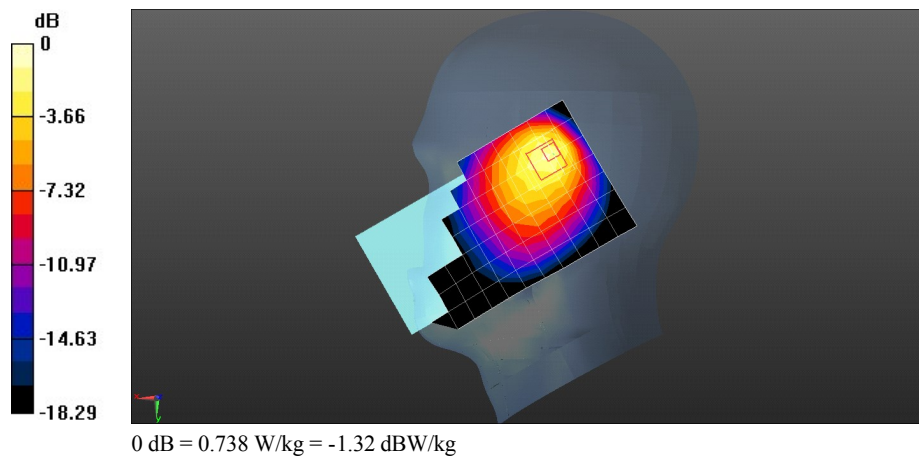

Test Laboratory: HUAWEI SAR/HAC Lab

MT7-L09 LTE Band V 10M QPSK 1RB#25 20600CH Back side 15mm -Main Antenna

DUT: MT7-L09; Type: Smart Phone; Serial: SAR1

Communication System: UID 0, LTE-FDD (SC-FDMA, 10MHz, QPSK/16-QAM) (0); Frequency: 844 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 844$ MHz; $\sigma = 0.965$ S/m; $\epsilon_r = 53.298$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3736; ConvF(9.08, 9.08, 9.08); Calibrated: 2014-4-24;
- Sensor-Surface: 3mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE4 Sn1236; Calibrated: 2013-11-25
- Phantom: SAM1; Type: SAM; Serial: TP-1475
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7164)

Configuration/Body/Area Scan (9x14x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 0.286 W/kg


Configuration/Body/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 17.088 V/m; Power Drift = -0.04 dB

Peak SAR (extrapolated) = 0.334 W/kg

SAR(1 g) = 0.266 W/kg; SAR(10 g) = 0.206 W/kg

Maximum value of SAR (measured) = 0.291 W/kg

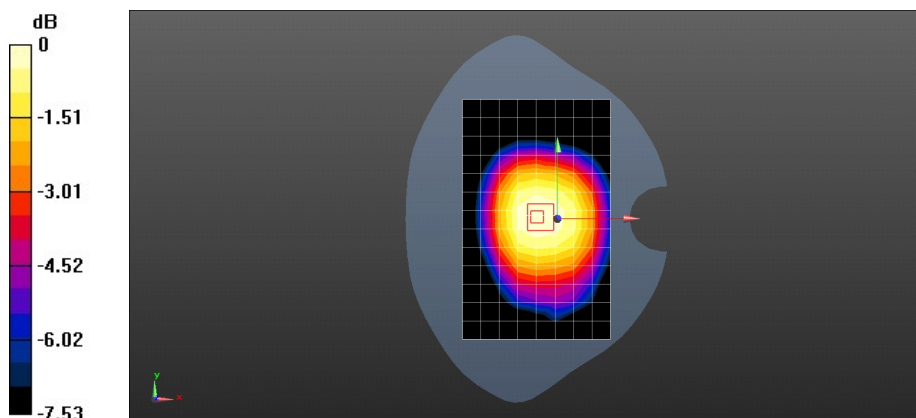

0 dB = 0.291 W/kg = -5.37 dBW/kg

Test Laboratory: HUAWEI SAR/HAC Lab

MT7-L09 LTE Band V 10M QPSK 1RB#25 20600CH Back side 10mm -Main Antenna

DUT: MT7-L09; Type: Smart Phone; Serial: SAR1

Communication System: UID 0, LTE-FDD (SC-FDMA, 10MHz, QPSK/16-QAM) (0); Frequency: 844 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 844 \text{ MHz}$; $\sigma = 0.965 \text{ S/m}$; $\epsilon_r = 53.298$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3736; ConvF(9.08, 9.08, 9.08); Calibrated: 2014-4-24;
- Sensor-Surface: 3mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE4 Sn1236; Calibrated: 2013-11-25
- Phantom: SAM1; Type: SAM; Serial: TP-1475
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7164)

Configuration/Body/Area Scan (9x14x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (measured) = 0.315 W/kg


Configuration/Body/Zoom Scan (6x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 17.077 V/m ; Power Drift = 0.13 dB

Peak SAR (extrapolated) = 0.362 W/kg

SAR(1 g) = 0.288 W/kg ; SAR(10 g) = 0.224 W/kg

Maximum value of SAR (measured) = 0.314 W/kg

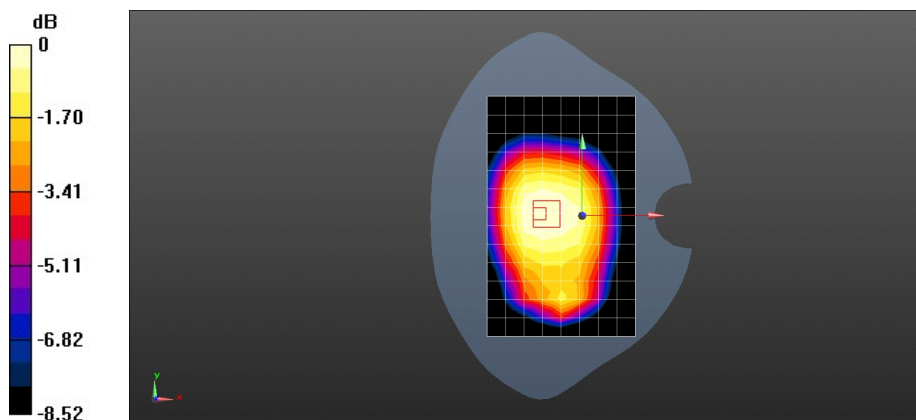

0 dB = 0.314 W/kg = -5.03 dBW/kg

Test Laboratory: HUAWEI SAR/HAC Lab

MT7-L09 LTE Band IV 20M QPSK 1RB#50 20175CH Right hand touch cheek with battery 2# -Secondary Antenna

DUT: MT7-L09; Type: Smart Phone; Serial: SAR1

Communication System: UID 0, LTE-FDD (SC-FDMA, 20MHz, QPSK/16-QAM) (0); Frequency: 1732.5 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 1732.5$ MHz; $\sigma = 1.327$ S/m; $\epsilon_r = 40.772$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY Configuration:

- Probe: EX3DV4 - SN3898; ConvF(8.38, 8.38, 8.38); Calibrated: 2014-3-10;
- Sensor-Surface: 3mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE4 Sn852; Calibrated: 2014-4-30
- Phantom: SAM3; Type: SAM; Serial: TP-1597
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7164)

Configuration/Head/Area Scan (8x13x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.777 W/kg


Configuration/Head/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 11.846 V/m; Power Drift = 0.04 dB

Peak SAR (extrapolated) = 1.13 W/kg

SAR(1 g) = 0.553 W/kg; SAR(10 g) = 0.246 W/kg

[Info: Interpolated medium parameters used for SAR evaluation.](#)

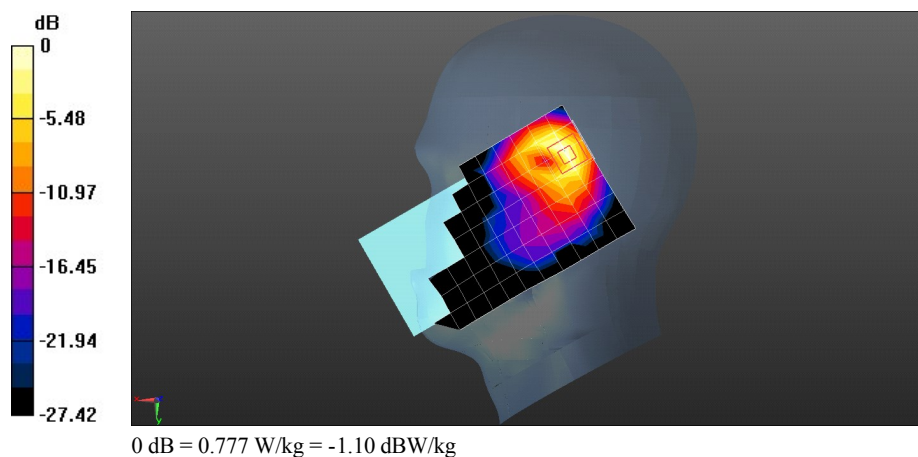

Test Laboratory: HUAWEI SAR/HAC Lab

MT7-L09 LTE Band IV 20M QPSK 1RB#50 20050CH Back side 15mm -Main Antenna

DUT: MT7-L09; Type: Smart Phone; Serial: SAR1

Communication System: UID 0, LTE-FDD (SC-FDMA, 20MHz, QPSK/16-QAM) (0); Frequency: 1720 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1720$ MHz; $\sigma = 1.488$ S/m; $\epsilon_r = 51.783$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: ES3DV3 - SN3168; ConvF(4.94, 4.94, 4.94); Calibrated: 2013-9-30;
- Sensor-Surface: 3mm (Mechanical Surface Detection), $z = 2.0, 32.0$
- Electronics: DAE4 Sn1236; Calibrated: 2013-11-25
- Phantom: SAM1; Type: SAM; Serial: TP-1475
- DASY52 52.8(1222); SEMCAD X 14.6.10(7164)

Configuration/Body/Area Scan (9x14x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 1.33 W/kg


Configuration/Body/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 1.087 V/m; Power Drift = 0.09 dB

Peak SAR (extrapolated) = 1.87 W/kg

SAR(1 g) = 1.12 W/kg; SAR(10 g) = 0.619 W/kg

Maximum value of SAR (measured) = 1.29 W/kg

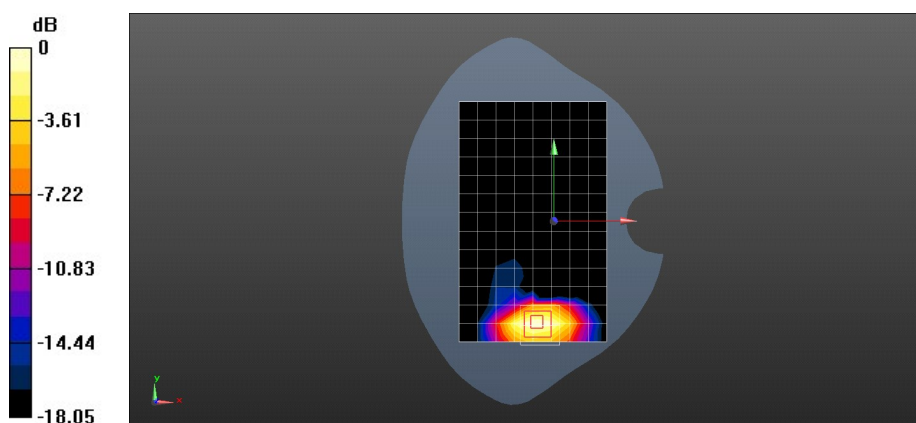

0 dB = 1.29 W/kg = 1.09 dBW/kg

Test Laboratory: HUAWEI SAR/HAC Lab

MT7-L09 LTE Band IV 20M QPSK 50%RB#50 20050CH Bottom side 10mm -Main Antenna

DUT: MT7-L09; Type: Smart Phone; Serial: SAR1

Communication System: UID 0, LTE-FDD (SC-FDMA, 20MHz, QPSK/16-QAM) (0); Frequency: 1720 MHz;Duty Cycle: 1:1

Medium parameters used: $f = 1720$ MHz; $\sigma = 1.488$ S/m; $\epsilon_r = 51.783$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: ES3DV3 - SN3168; ConvF(4.94, 4.94, 4.94); Calibrated: 2013-9-30;
- Sensor-Surface: 3mm (Mechanical Surface Detection), $z = 2.0, 32.0$
- Electronics: DAE4 Sn1236; Calibrated: 2013-11-25
- Phantom: SAM1; Type: SAM; Serial: TP-1475
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7164)

Configuration/Body/Area Scan (7x11x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 1.23 W/kg


Configuration/Body/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 11.173 V/m; Power Drift = 0.03 dB

Peak SAR (extrapolated) = 1.77 W/kg

SAR(1 g) = 1.02 W/kg; SAR(10 g) = 0.534 W/kg

Maximum value of SAR (measured) = 1.27 W/kg

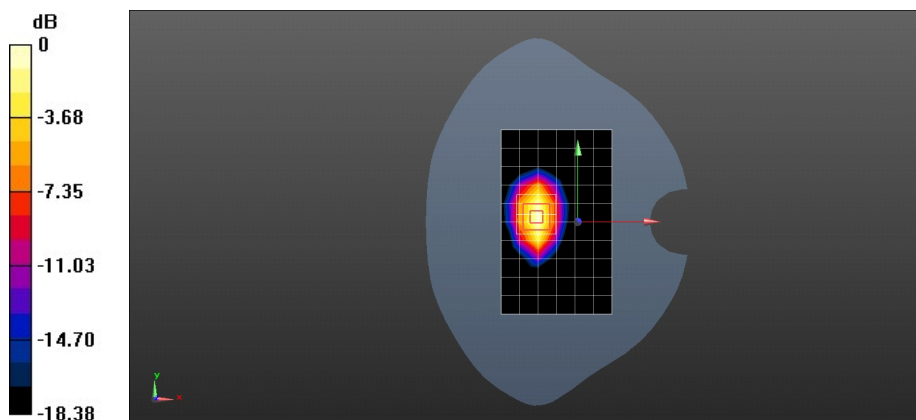

0 dB = 1.27 W/kg = 1.03 dBW/kg

Test Laboratory: HUAWEI SAR/HAC Lab

MT7-L09 LTE Band IV 20M QPSK 50%RB#50 20050CH Bottom side 0mm -Main Antenna

DUT: MT7-L09; Type: Smart Phone; Serial: SAR1

Communication System: UID 0, LTE-FDD (SC-FDMA, 20MHz, QPSK/16-QAM) (0); Frequency: 1720 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1720$ MHz; $\sigma = 1.488$ S/m; $\epsilon_r = 51.783$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: ES3DV3 - SN3168; ConvF(4.94, 4.94, 4.94); Calibrated: 2013-9-30;
- Sensor-Surface: 3mm (Mechanical Surface Detection), $z = 2.0, 32.0$
- Electronics: DAE4 Sn1236; Calibrated: 2013-11-25
- Phantom: SAM1; Type: SAM; Serial: TP:1475
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7164)

Configuration/Body/Area Scan (7x11x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 3.93 W/kg


Configuration/Body/Zoom Scan (5x6x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 48.818 V/m; Power Drift = 0.14 dB

Peak SAR (extrapolated) = 6.86 W/kg

SAR(1 g) = 3.05 W/kg; SAR(10 g) = 1.27 W/kg

Maximum value of SAR (measured) = 4.27 W/kg

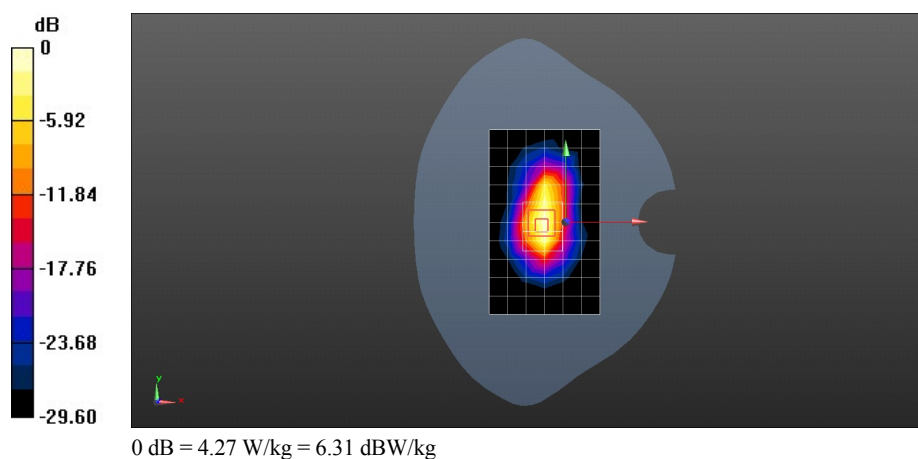

Test Laboratory: HUAWEI SAR/HAC Lab

MT7-L09 LTE Band II 20M QPSK 1RB#0 19100CH Right hand touch cheek with battery 2# -Secondary Antenna

DUT: MT7-L09; Type: Smart Phone; Serial: SAR1

Communication System: UID 0, LTE-FDD (SC-FDMA, 20MHz, QPSK/16-QAM) (0); Frequency: 1900 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1900$ MHz; $\sigma = 1.376$ S/m; $\epsilon_r = 40.705$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY Configuration:

- Probe: EX3DV4 - SN3898; ConvF(8.2, 8.2, 8.2); Calibrated: 2014-3-10;
- Sensor-Surface: 3mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE4 Sn852; Calibrated: 2014-4-30
- Phantom: SAM4; Type: SAM; Serial: TP-1620
- DASY52 52.8(1222); SEMCAD X 14.6.10(7164)

Configuration/Head/Area Scan (9x14x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 0.753 W/kg


Configuration/Head/Zoom Scan (6x6x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 12.628 V/m; Power Drift = 0.02 dB

Peak SAR (extrapolated) = 1.51 W/kg

SAR(1 g) = 0.675 W/kg; SAR(10 g) = 0.282 W/kg

Maximum value of SAR (measured) = 0.779 W/kg

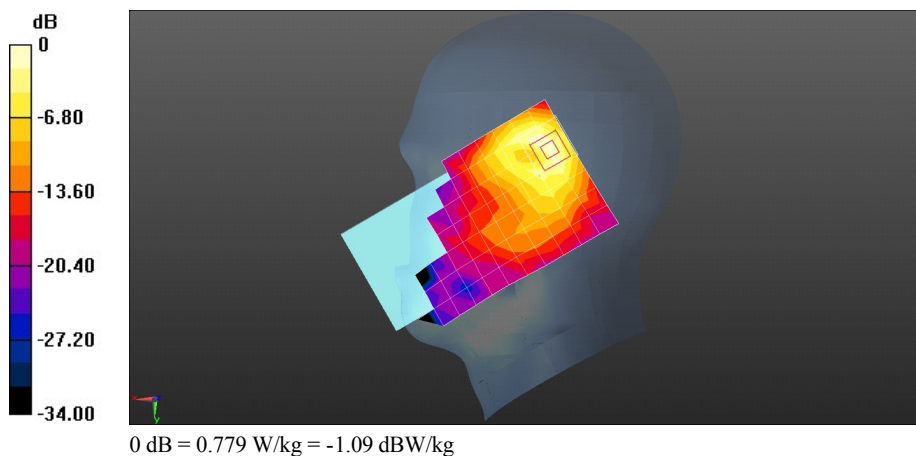

Test Laboratory: HUAWEI SAR/HAC Lab

MT7-L09 LTE Band II 20M QPSK 1RB#0 19100CH Back side 15mm with battery 2# -Main Antenna

DUT: MT7-L09; Type: Smart Phone; Serial: SAR1

Communication System: UID 0, LTE-FDD (SC-FDMA, 20MHz, QPSK/16-QAM) (0); Frequency: 1900 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1900$ MHz; $\sigma = 1.524$ S/m; $\epsilon_r = 51.047$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3736; ConvF(7.35, 7.35, 7.35); Calibrated: 2014-4-24;
- Sensor-Surface: 3mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE4 Sn1236; Calibrated: 2013-11-25
- Phantom: SAM2; Type: SAM; Serial: TP:1474
- DASY52 52.8(1222); SEMCAD X 14.6.10(7164)

Configuration/Body/Area Scan (9x14x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 0.470 W/kg


Configuration/Body/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 3.813 V/m; Power Drift = 0.48 dB

Peak SAR (extrapolated) = 0.670 W/kg

SAR(1 g) = 0.393 W/kg; SAR(10 g) = 0.212 W/kg

Maximum value of SAR (measured) = 0.483 W/kg

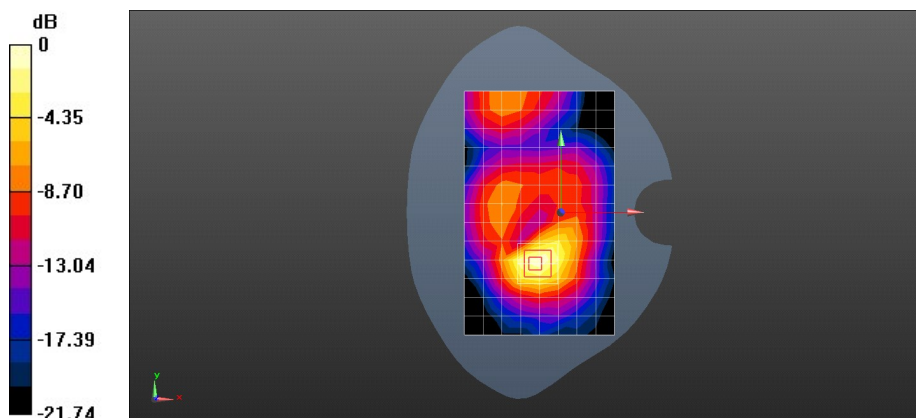

0 dB = 0.483 W/kg = -3.16 dBW/kg

Test Laboratory: HUAWEI SAR/HAC Lab

MT7-L09 LTE Band II 20M QPSK 50%RB#50 18700CH Bottom Side 10mm with battery 2# -Main Antenna

DUT: MT7-L09; Type: Smart Phone; Serial: SAR1

Communication System: UID 0, LTE-FDD (SC-FDMA, 20MHz, QPSK/16-QAM) (0); Frequency: 1860 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1860$ MHz; $\sigma = 1.494$ S/m; $\epsilon_r = 51.199$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3736; ConvF(7.35, 7.35, 7.35); Calibrated: 2014-4-24;
- Sensor-Surface: 3mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE4 Sn1236; Calibrated: 2013-11-25
- Phantom: SAM2; Type: SAM; Serial: TP:1474
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7164)

Configuration/Body/Area Scan (6x9x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 1.04 W/kg


Configuration/Body/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 18.964 V/m; Power Drift = -0.09 dB

Peak SAR (extrapolated) = 1.64 W/kg

SAR(1 g) = 0.927 W/kg; SAR(10 g) = 0.471 W/kg

Maximum value of SAR (measured) = 1.14 W/kg

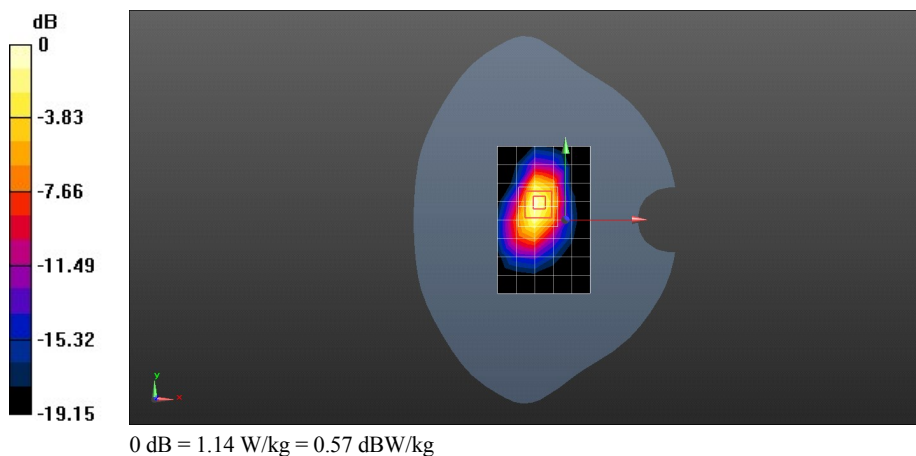

Test Laboratory: HUAWEI SAR/HAC Lab

MT7-L09 LTE Band VII 20M QPSK 1RB#50 21100CH Right hand tilt 15 degree -Secondary Antenna

DUT: MT7-L09; Type: Smart Phone; Serial: SAR1

Communication System: UID 0, LTE-FDD (SC-FDMA, 20MHz, QPSK/16-QAM) (0); Frequency: 2535 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 2535$ MHz; $\sigma = 1.921$ S/m; $\epsilon_r = 39.646$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY Configuration:

- Probe: EX3DV4 - SN3898; ConvF(7.55, 7.55, 7.55); Calibrated: 2014-3-10;
- Sensor-Surface: 3mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE4 Sn852; Calibrated: 2014-4-30
- Phantom: SAM4; Type: SAM; Serial: TP-1620
- DASY52 52.8(1222); SEMCAD X 14.6.10(7164)

Configuration/Head/Area Scan (8x16x1): Measurement grid: $dx=12$ mm, $dy=12$ mm

Maximum value of SAR (measured) = 0.868 W/kg


Configuration/Head/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 6.017 V/m; Power Drift = 0.09 dB

Peak SAR (extrapolated) = 1.89 W/kg

SAR(1 g) = 0.766 W/kg; SAR(10 g) = 0.282 W/kg

Maximum value of SAR (measured) = 1.10 W/kg

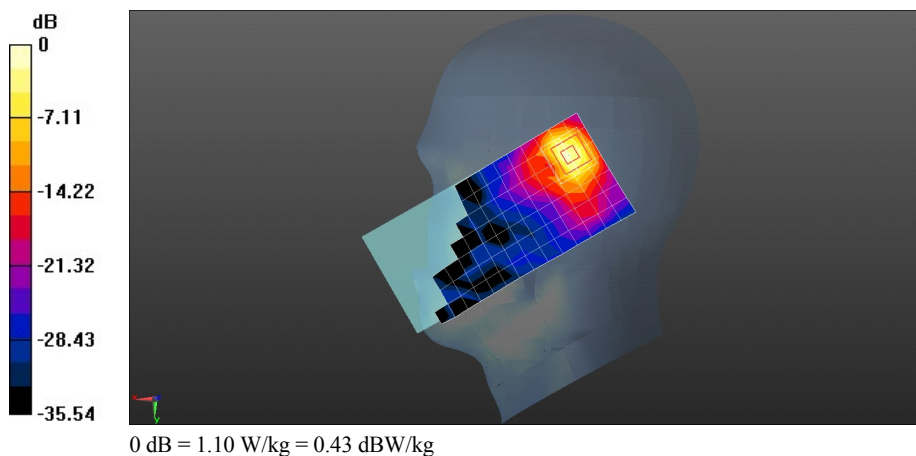

Test Laboratory: HUAWEI SAR/HAC Lab

MT7-L09 LTE Band VII 20M QPSK 1RB#50 21100CH Back Side 15mm with battery 2# -Main Antenna

DUT: MT7-L09; Type: Smart Phone; Serial: SAR1

Communication System: UID 0, LTE-FDD (SC-FDMA, 20MHz, QPSK/16-QAM) (0); Frequency: 2535 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 2535$ MHz; $\sigma = 2.149$ S/m; $\epsilon_r = 51.587$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3898; ConvF(7.49, 7.49, 7.49); Calibrated: 2014-3-10;
- Sensor-Surface: 3mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE4 Sn852; Calibrated: 2014-4-30
- Phantom: SAM3; Type: SAM; Serial: TP-1597
- DASY52 52.8(1222); SEMCAD X 14.6.10(7164)

Configuration/Body/Area Scan (9x17x1): Measurement grid: $dx=12$ mm, $dy=12$ mm

Maximum value of SAR (measured) = 0.489 W/kg


Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 2.155 V/m; Power Drift = 0.05 dB

Peak SAR (extrapolated) = 0.724 W/kg

SAR(1 g) = 0.384 W/kg; SAR(10 g) = 0.202 W/kg

Maximum value of SAR (measured) = 0.482 W/kg

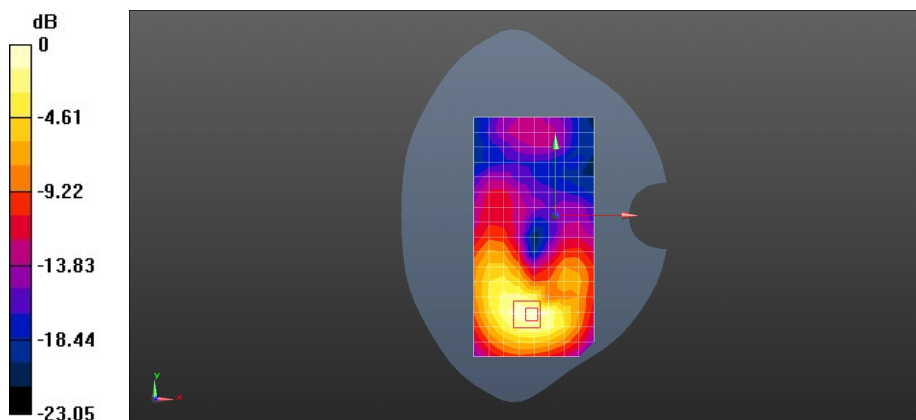

0 dB = 0.482 W/kg = -3.17 dBW/kg

Test Laboratory: HUAWEI SAR/HAC Lab

MT7-L09 LTE Band VII 20M QPSK 1RB#50 21350CH Bottom Side 10mm -Main Antenna

DUT: MT7-L09; Type: Smart Phone; Serial: SAR1

Communication System: UID 0, LTE-FDD (SC-FDMA, 20MHz, QPSK/16-QAM) (0); Frequency: 2560 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 2560$ MHz; $\sigma = 2.181$ S/m; $\epsilon_r = 51.503$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3898; ConvF(7.06, 7.06, 7.06); Calibrated: 2014-3-10;
- Sensor-Surface: 3mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE4 Sn852; Calibrated: 2014-4-30
- Phantom: SAM3; Type: SAM; Serial: TP-1597
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7164)

Configuration/Body/Area Scan (6x11x1): Measurement grid: $dx=12$ mm, $dy=12$ mm

Maximum value of SAR (measured) = 1.42 W/kg


Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 16.369 V/m; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 2.13 W/kg

SAR(1 g) = 1.08 W/kg; SAR(10 g) = 0.511 W/kg

Maximum value of SAR (measured) = 1.41 W/kg

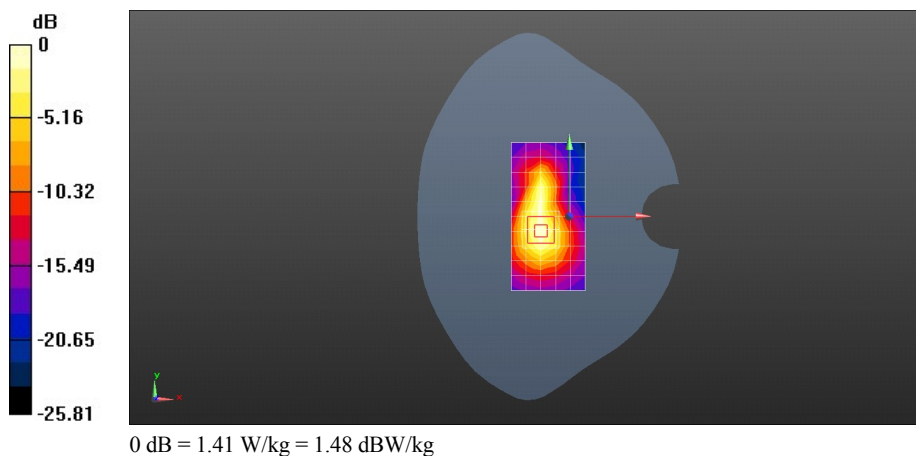

Test Laboratory: HUAWEI SAR/HAC Lab

MT7-L09 WiFi 802.11b 6CH Left hand touch cheek

DUT: MT7-L09; Type: Smart Phone; Serial: SAR1

Communication System: UID 0, WiFi(802.11a/b/g/n) (0); Frequency: 2437 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 2437$ MHz; $\sigma = 1.77$ S/m; $\epsilon_r = 39.717$; $\rho = 1000$ kg/m³

Phantom section: Left Section

DASY Configuration:

- Probe: EX3DV4 - SN3898; ConvF(7.55, 7.55, 7.55); Calibrated: 2014-3-10;
- Sensor-Surface: 3mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE4 Sn852; Calibrated: 2014-4-30
- Phantom: SAM4; Type: SAM; Serial: TP-1620
- DASY52 52.8(1222); SEMCAD X 14.6.10(7164)

Configuration/Head/Area Scan (8x15x1): Measurement grid: $dx=12$ mm, $dy=12$ mm

Maximum value of SAR (measured) = 0.875 W/kg


Configuration/Head/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 11.441 V/m; Power Drift = 0.10 dB

Peak SAR (extrapolated) = 1.68 W/kg

SAR(1 g) = 0.745 W/kg; SAR(10 g) = 0.337 W/kg

Maximum value of SAR (measured) = 1.01 W/kg

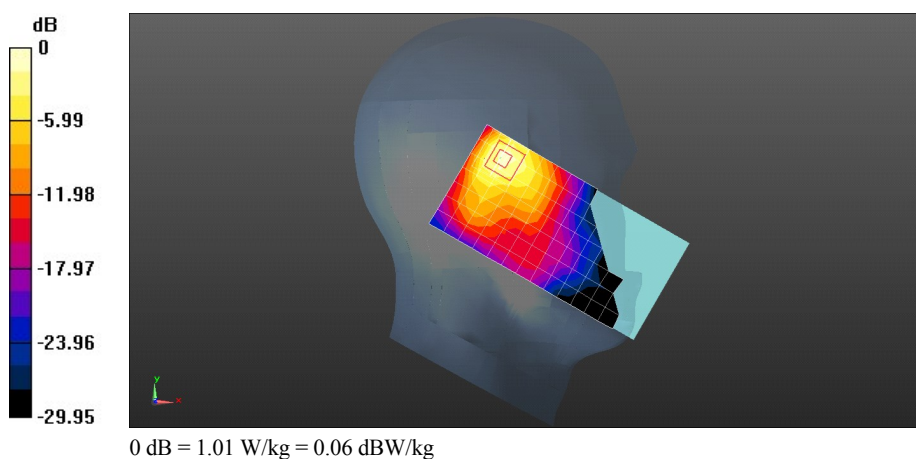

Test Laboratory: HUAWEI SAR/HAC Lab

MT7-L09 Wifi 802. 11b 6CH Front side 15mm with battery 2#

DUT: MT7-L09; Type: Smart Phone; Serial: SAR1

Communication System: UID 0, WiFi(802.11a/b/g/n/ac) (0); Frequency: 2437 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 2437$ MHz; $\sigma = 1.916$ S/m; $\epsilon_r = 50.851$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3736; ConvF(6.99, 6.99, 6.99); Calibrated: 2014-4-24;
- Sensor-Surface: 3mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE4 Sn1236; Calibrated: 2013-11-25
- Phantom: SAM2; Type: SAM; Serial: TP:1474
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7164)

Configuration/Body/Area Scan (10x17x1): Measurement grid: $dx=12$ mm, $dy=12$ mm

Maximum value of SAR (measured) = 0.0675 W/kg


Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 2.984 V/m; Power Drift = -0.17 dB

Peak SAR (extrapolated) = 0.105 W/kg

SAR(1 g) = 0.056 W/kg; SAR(10 g) = 0.031 W/kg

Maximum value of SAR (measured) = 0.0697 W/kg

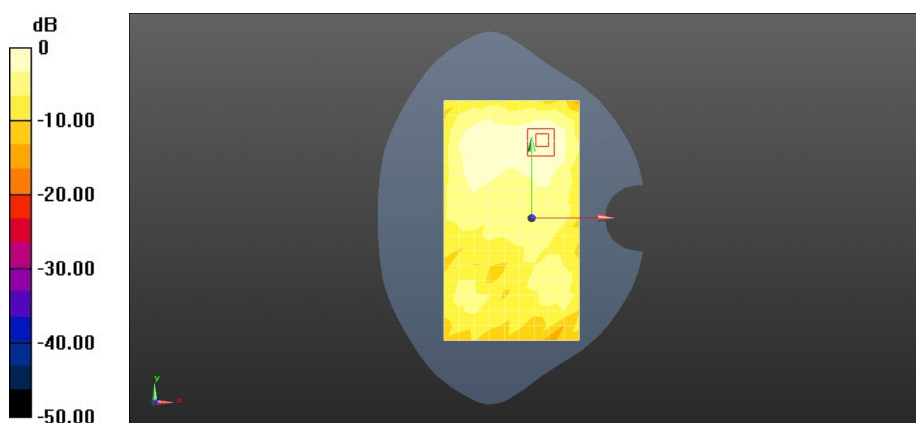

0 dB = 0.0697 W/kg = -11.57 dBW/kg

Test Laboratory: HUAWEI SAR/HAC Lab

MT7-L09 Wifi 802. 11b 6CH Front side 10mm with battery 2#

DUT: MT7-L09; Type: Smart Phone; Serial: SAR1

Communication System: UID 0, WiFi(802.11a/b/g/n/ac) (0); Frequency: 2437 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 2437$ MHz; $\sigma = 1.916$ S/m; $\epsilon_r = 50.851$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3736; ConvF(6.99, 6.99, 6.99); Calibrated: 2014-4-24;
- Sensor-Surface: 3mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE4 Sn1236; Calibrated: 2013-11-25
- Phantom: SAM2; Type: SAM; Serial: TP:1474
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7164)

Configuration/Body/Area Scan (10x17x1): Measurement grid: $dx=12$ mm, $dy=12$ mm

Maximum value of SAR (measured) = 0.125 W/kg


Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 3.417 V/m; Power Drift = -0.04 dB

Peak SAR (extrapolated) = 0.192 W/kg

SAR(1 g) = 0.105 W/kg; SAR(10 g) = 0.057 W/kg

Maximum value of SAR (measured) = 0.130 W/kg

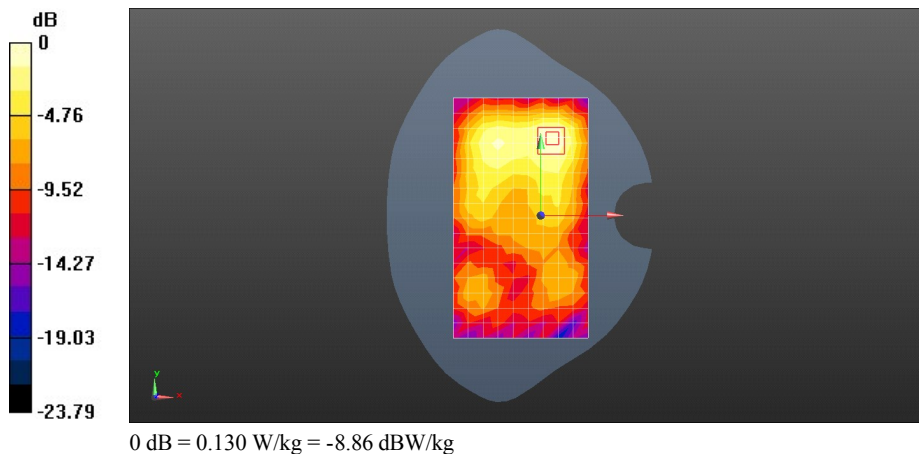

Test Laboratory: HUAWEI SAR/HAC Lab

MT7-L09 WiFi 802.11a 157CH Right hand touch cheek with battery 2#

DUT: MT7-L09; Type: Smart Phone; Serial: SAR1

Communication System: UID 0, WiFi(802.11a/b/g/n) (0); Frequency: 5785 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 5785$ MHz; $\sigma = 5.395$ S/m; $\epsilon_r = 35.118$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY Configuration:

- Probe: EX3DV4 - SN3898; ConvF(4.84, 4.84, 4.84); Calibrated: 2014-3-10;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = 1.0, 25.0$
- Electronics: DAE4 Sn852; Calibrated: 2014-4-30
- Phantom: SAM3; Type: SAM; Serial: TP-1597
- DASY52 52.8(1222); SEMCAD X 14.6.10(7164)

Configuration/Head/Area Scan (10x18x1): Measurement grid: $dx=10$ mm, $dy=10$ mm

Maximum value of SAR (measured) = 0.852 W/kg


Configuration/Head/Zoom Scan (8x8x7)/Cube 0: Measurement grid: $dx=4$ mm, $dy=4$ mm, $dz=1.4$ mm

Reference Value = 7.719 V/m; Power Drift = -0.02 dB

Peak SAR (extrapolated) = 2.88 W/kg

SAR(1 g) = 0.495 W/kg; SAR(10 g) = 0.139 W/kg

Maximum value of SAR (measured) = 1.26 W/kg

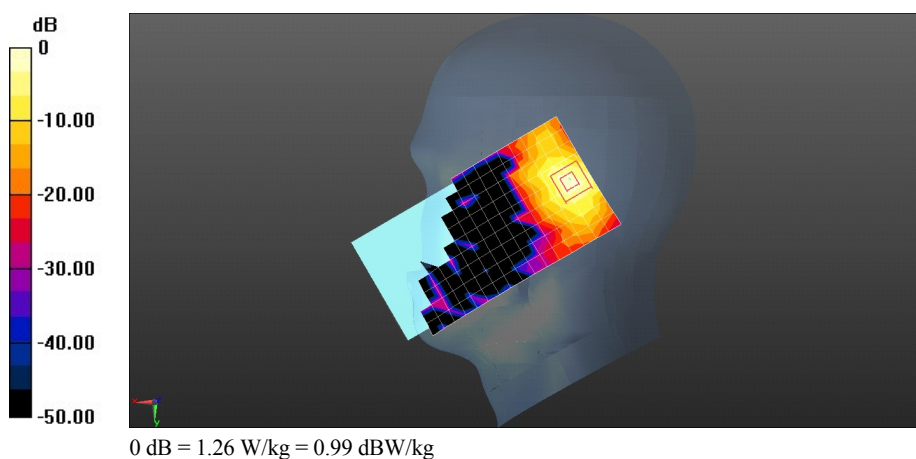

Test Laboratory: HUAWEI SAR/HAC Lab

MT7-L09 WiFi 802.11a 112CH Back Side 15mm

DUT: MT7-L09; Type: Smart Phone; Serial: SAR1

Communication System: UID 0, WiFi(802.11a/b/g/n) (0); Frequency: 5560 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 5560$ MHz; $\sigma = 5.699$ S/m; $\epsilon_r = 49.131$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3898; ConvF(4.22, 4.22, 4.22); Calibrated: 2014-3-10;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = 1.0, 25.0$
- Electronics: DAE4 Sn852; Calibrated: 2014-4-30
- Phantom: SAM4; Type: SAM; Serial: TP-1620
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7164)

Configuration/Body/Area Scan (9x17x1): Measurement grid: $dx=10$ mm, $dy=10$ mm

Maximum value of SAR (measured) = 0.146 W/kg


Configuration/Body/Zoom Scan (8x8x7)/Cube 0: Measurement grid: $dx=4$ mm, $dy=4$ mm, $dz=1.4$ mm

Reference Value = 1.126 V/m; Power Drift = 0.16 dB

Peak SAR (extrapolated) = 0.351 W/kg

SAR(1 g) = 0.059 W/kg; SAR(10 g) = 0.022 W/kg

Maximum value of SAR (measured) = 0.163 W/kg

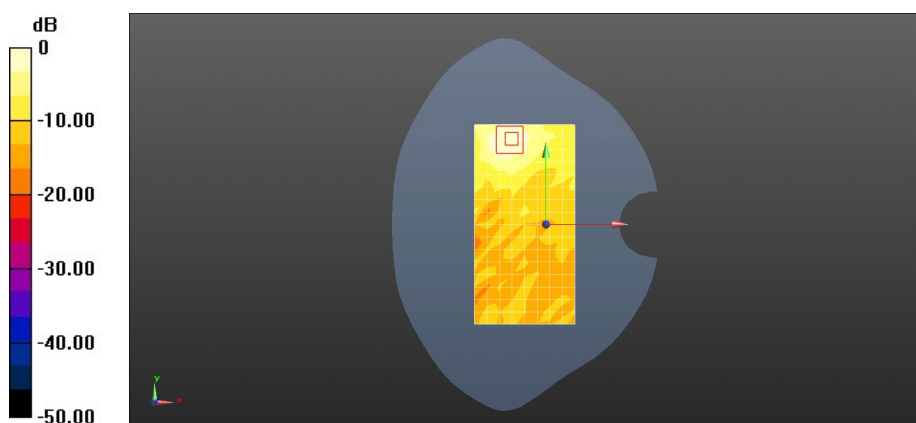

0 dB = 0.163 W/kg = -7.87 dBW/kg

Test Laboratory: HUAWEI SAR/HAC Lab

MT7-L09 WiFi 802.11a 112CH Back Side 0mm

DUT: MT7-L09; Type: Smart Phone; Serial: SAR1

Communication System: UID 0, WiFi(802.11a/b/g/n) (0); Frequency: 5560 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 5560$ MHz; $\sigma = 5.699$ S/m; $\epsilon_r = 49.131$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3898; ConvF(4.22, 4.22, 4.22); Calibrated: 2014-3-10;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = 1.0, 25.0$
- Electronics: DAE4 Sn852; Calibrated: 2014-4-30
- Phantom: SAM4; Type: SAM; Serial: TP-1620
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7164)

Configuration/Body/Area Scan (9x17x1): Measurement grid: $dx=10$ mm, $dy=10$ mm

Maximum value of SAR (measured) = 2.33 W/kg

Configuration/Body/Zoom Scan (8x8x7)/Cube 0: Measurement grid: $dx=4$ mm, $dy=4$ mm, $dz=1.4$ mm

Reference Value = 0 V/m; Power Drift = 999.00 dB

Peak SAR (extrapolated) = 6.78 W/kg

SAR(1 g) = 1.2 W/kg; SAR(10 g) = 0.322 W/kg

Maximum value of SAR (measured) = 3.31 W/kg

