

FCC Test Report

FCC ID: QISNYX-B10

Project No. : 1703C225
Equipment : Smart Band
Model Name : NYX-B10
Applicant : Huawei Technologies Co.,Ltd.
Address : Administration Building, Headquarters of Huawei Technologies Co., Ltd., Bantian, Longgang District, Shenzhen, 518129, P.R.C

Date of Receipt : Mar. 27, 2017
Date of Test : Mar. 27, 2017 ~ Apr. 05, 2017
Issued Date : Apr. 06, 2017
Tested by : BTL Inc.

Testing Engineer : Helen Wang
(Helen Wang)

Technical Manager : Bill Zhang
(Bill Zhang)

Authorized Signatory : Steven Lu
(Steven Lu)

B T L I N C .

No.3, Jinshagang 1st Road, Shixia, Dalang Town, Dongguan,
Guangdong, China.

TEL: +86-769-8318-3000 FAX: +86-769-8319-6000



Declaration

BTL represents to the client that testing is done in accordance with standard procedures as applicable and that test instruments used has been calibrated with standards traceable to international standard(s) and/or national standard(s).

BTL's reports apply only to the specific samples tested under conditions. It is manufacture's responsibility to ensure that additional production units of this model are manufactured with the identical electrical and mechanical components. **BTL** shall have no liability for any declarations, inferences or generalizations drawn by the client or others from **BTL** issued reports.

BTL's report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the Federal Government.

This report is the confidential property of the client. As a mutual protection to the clients, the public and **BTL-self**, extracts from the test report shall not be reproduced except in full with **BTL's** authorized written approval.

BTL's laboratory quality assurance procedures are in compliance with the **ISO Guide 17025** requirements, and accredited by the conformity assessment authorities listed in this test report.

Limitation

For the use of the authority's logo is limited unless the Test Standard(s)/Scope(s)/Item(s) mentioned in this test report is (are) included in the conformity assessment authorities acceptance respective.

Table of Contents	Page
REPORT ISSUED HISTORY	4
1 . CERIFICATION	5
2 . SUMMARY OF TEST RESULTS	6
2.1 TEST FACILITY	7
2.2 MEASUREMENT UNCERTAINTY	7
3 . GENERAL INFORMATION	8
3.1 GENERAL DESCRIPTION OF EUT	8
3.2 DESCRIPTION OF TEST MODES	9
3.3 EUT OPERATING CONDITIONS	9
3.4 BLOCK DIAGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED	10
3.5 DESCRIPTION OF SUPPORT UNITS	11
4 . EMC EMISSION TEST	12
4.1 CONDUCTED EMISSION MEASUREMENT	12
4.1.1 POWER LINE CONDUCTED EMISSION	12
4.1.2 MEASUREMENT INSTRUMENTS LIST	12
4.1.3 TEST PROCEDURE	13
4.1.4 DEVIATION FROM TEST STANDARD	13
4.1.5 TEST SETUP	13
4.1.6 TEST RESULTS	13
4.2 RADIATED EMISSION MEASUREMENT	18
4.2.1 LIMITS OF RADIATED EMISSION MEASUREMENT	18
4.2.2 MEASUREMENT INSTRUMENTS LIST	19
4.2.3 TEST PROCEDURE	20
4.2.4 DEVIATION FROM TEST STANDARD	20
4.2.5 TEST SETUP	21
4.2.6 TEST RESULTS-BELOW 1GHZ	21
4.2.7 TEST RESULTS-ABOVE 1GHZ	30

REPORT ISSUED HISTORY

Issued No.	Description	Issued Date
BTL-FCCE-1-1703C225	Original Issue.	Apr. 06, 2017

1. CERIFICATION

Equipment : Smart Band
Brand Name : honor
Model Name : NYX-B10
Applicant : Huawei Technologies Co.,Ltd.
Manufacturer : Huawei Technologies Co.,Ltd.
Address : Administration Building, Headquarters of Huawei Technologies Co., Ltd.,
Bantian,
Factory : Flextronics Industrial (ZhuHai) Co., Ltd.
Address : Xin Qing Science &Technology Industrial Park, Doumen, Zhuhai, GuangDong
Date of Test : Mar. 27, 2017 ~ Apr. 05, 2017
Test Sample : Engineering Sample
Standard(s) : FCC Part 15, Subpart B
ANSI C63.4-2014

The above equipment has been tested and found compliance with the requirement of the relative standards by BTL Inc.

The test data, data evaluation, and equipment configuration contained in our test report (Ref No. BTL-FCCE-1-1703C225) were obtained utilizing the test procedures, test instruments, test sites that has been accredited by the Authority of TAF according to the ISO-17025 quality assessment standard and technical standard(s).

2. SUMMARY OF TEST RESULTS

Test procedures according to the technical standard(s):

EMC Emission				
Standard(s)	Test Item	Limit	Judgment	Remark
FCC Part15, Subpart B ANSI C63.4-2014	Conducted Emission	Class B	PASS	
	Radiated emission Below 1 GHz	Class B	PASS	
	Radiated emission Above 1 GHz	Class B	PASS	NOTE(2)

NOTE:

- (1) " N/A" denotes test is not applicable to this device.
- (2) The EUT's max operating frequency is 2.4GHz which exceeds 108 MHz, so the test will be performed.

2.1 TEST FACILITY

The test facilities used to collect the test data in this report at the location of No.3, Jinshagang 1st Road, Shixia, Dalang Town, Dongguan, Guangdong, China.

2.2 MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2. The BTL measurement uncertainty is less than the CISPR 16-4-2 U_{CISPR} requirement.

The reported uncertainty of measurement $y \pm U$, where expanded uncertainty U is based on a standard uncertainty multiplied by a coverage factor of $k=2$, providing a level of confidence of approximately 95%.

A. Conducted Measurement :

Test Site	Method	Measurement Frequency Range	U, (dB)
DG-C02	CISPR	150 kHz ~ 30MHz	2.32

B. Radiated Measurement :

Test Site	Method	Measurement Frequency Range	Ant. H / V	U, (dB)
DG-CB02 (3m)	CISPR	30MHz ~ 200MHz	V	3.83
		30MHz ~ 200MHz	H	3.79
		200MHz ~ 1,000MHz	V	4.04
		200MHz ~ 1,000MHz	H	4.02

Test Site	Method	Measurement Frequency Range	U, (dB)
DG-CB02 (3m)	CISPR	1 ~ 6 GHz	4.50
		6 ~18 GHz	5.18

Note: Unless specifically mentioned, the uncertainty of measurement has not been taken into account to declare the compliance or non-compliance to the specification.

3. GENERAL INFORMATION

3.1 GENERAL DESCRIPTION OF EUT

Equipment	Smart Band
Brand Name	honor
Model Name	NYX-B10
Model Difference	N/A
Frequency	2400-2483.5
Power Source	#1 DC Voltage supplied from AC/DC adapter.(support unit) #2 Battery Supplied.
Power Rating	#1:AC 100-240V 50/60Hz #2:DC 5V
HW Version	EB1NYXM
SW Version	V1.0.41

Note:

1. For a more detailed features description, please refer to the manufacturer's specifications or the user's manual.

2.

Item	Mfr/Brand	Model.
Battery	COSLIGHT	HB351329ECW
	LISHEN	
USB Cable	Huawei Technologies Co.,Ltd.	N/A
Charge dock	Huawei Technologies Co.,Ltd.	AF33-1

3.2 DESCRIPTION OF TEST MODES

To investigate the maximum EMI emission characteristics generated from EUT, the test system was pre-scanning tested base on the consideration of following EUT operation mode or test configuration mode which possible have effect on EMI emission level. Each of these EUT operation mode(s) or test configuration mode(s) mentioned above was evaluated respectively.

Pretest Mode	Description
Mode 1	Operating
Mode 2	Charging+Operating

For Conducted Test	
Final Test Mode	Description
Mode 1	Operating
Mode 2	Charging+Operating


For Radiated Test	
Final Test Mode	Description
Mode 1	Operating
Mode 2	Charging+Operating

3.3 EUT OPERATING CONDITIONS


The EUT exercise program used during radiated and/or conducted emission measurement was designed to exercise the various system components in a manner similar to a typical use.

3.4 BLOCK DIAGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED

Mode 1

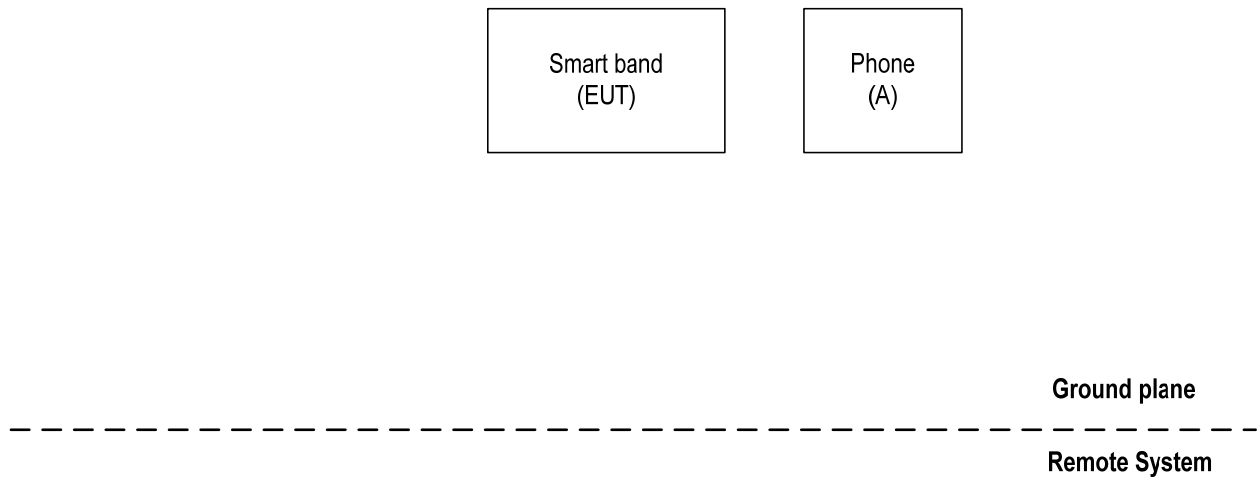

Mode 2

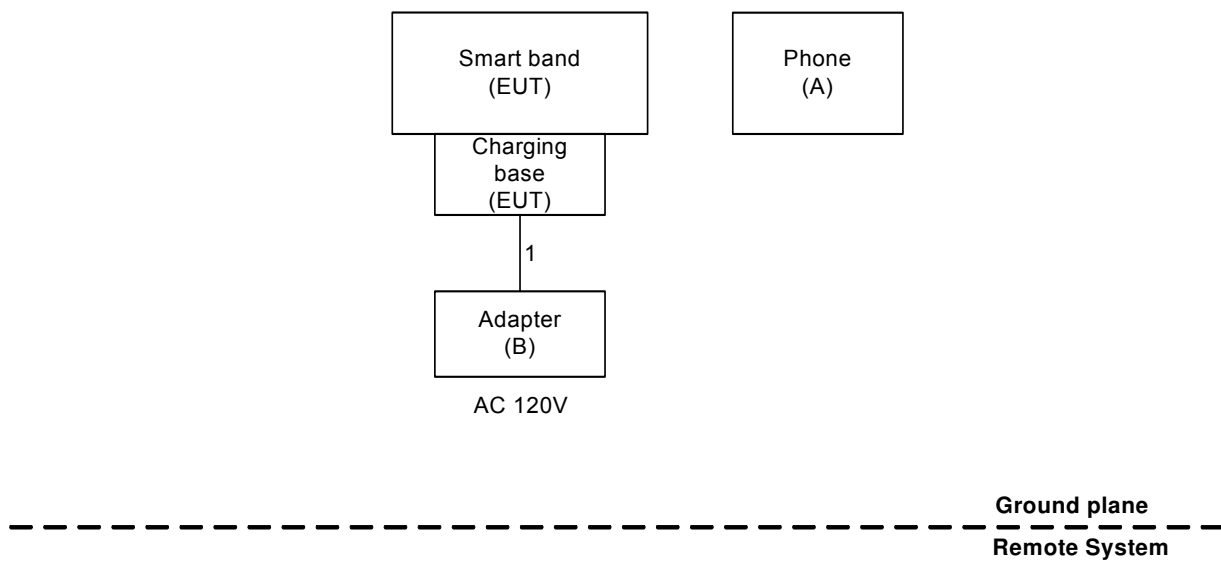

3.5 DESCRIPTION OF SUPPORT UNITS

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

Item	Equipment	Mfr/Brand	Model/Type No.	FCC ID	Series No.
A	Phone	HUAWEI	P9	N/A	N/A
B	Adapter	HUAWEI	HW-050100B01	N/A	N/A

Item	Shielded Type	Ferrite Core	Length	Note
1	YES	NO	1.2m	USB Cable

4. EMC EMISSION TEST

4.1 CONDUCTED EMISSION MEASUREMENT

4.1.1 POWER LINE CONDUCTED EMISSION (FREQUENCY RANGE 150KHZ-30MHZ)

FREQUENCY (MHz)	Class A (dBuV)		Class B (dBuV)	
	Quasi-peak	Average	Quasi-peak	Average
0.15 -0.5	79.00	66.00	66 - 56 *	56 - 46 *
0.50 -5.0	73.00	60.00	56.00	46.00
5.0 -30.0	73.00	60.00	60.00	50.00

Note:

- (1) The tighter limit applies at the band edges.
- (2) The limit of " * " marked band means the limitation decreases linearly with the logarithm of the frequency in the range.
- (3) The test result calculated as following:
 Measurement Value = Reading Level + Correct Factor
 Correct Factor = Insertion Loss + Cable Loss + Attenuator Factor(if use)
 Margin Level = Measurement Value - Limit Value

4.1.2 MEASUREMENT INSTRUMENTS LIST

Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Measurement Software	Farad	EZ-EMC Ver.NB-03A 1-01	N/A	N/A
2	LISN	EMCO	3816/2	00052765	Mar. 26, 2018
3	50Ω Terminator	SHX	TF2-3G-A	08122901	Mar. 26, 2018
4	TWO-LINE V-NETWORK	R&S	ENV216	101447	Mar. 26, 2018
5	Cable	emci	RG223(9K Hz-30MHz) (5m)	N/A	Mar. 07, 2018
6	EMI Test Receiver	R&S	ESCI	100382	Mar. 26, 2018

Remark: "N/A" denotes no model name, serial no. or calibration specified.
 All calibration period of equipment list is one year.


4.1.3 TEST PROCEDURE

- The EUT was placed 0.8 meters from the horizontal ground plane with EUT being connected to the power mains through a line impedance stabilization network (LISN). All other support equipments powered from additional LISN(s). The LISN provide 50 Ohm/ 50uH of coupling impedance for the measuring instrument.
- Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.
- I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
- LISN at least 80 cm from nearest part of EUT chassis.
- For the actual test configuration, please refer to the related Item –EUT Test Photos.
- First the whole spectrum of emission caused by equipment under test(EUT) is recorded with Detector set to peak. Peak value recorded in table if the margin from QP Limit is larger than 2dB, otherwise, QP value is recorded, Measuring frequency range from 150KHz to 30MHz.

4.1.4 DEVIATION FROM TEST STANDARD

No deviation

4.1.5 TEST SETUP

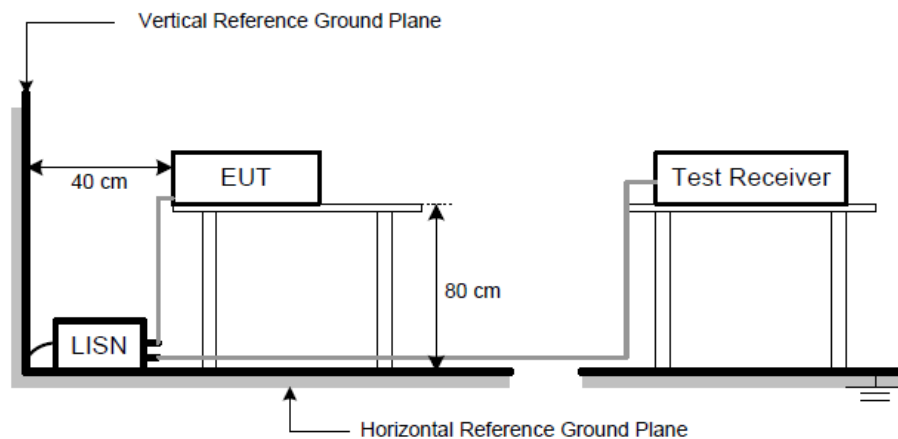


4.1.6 TEST RESULTS

Remark

- Reading in which marked as QP means measurements by using are Quasi-Peak Mode with Detector BW=9KHz; SPA setting in RBW=10KHz, VBW =10KHz, Swp. Time = 0.3 sec./MHz. Reading in which marked as AV means measurements by using are Average Mode with instrument setting in RBW=10KHz, VBW=10KHz, Swp. Time =0.3 sec./MHz.
- All readings are QP Mode value unless otherwise stated AVG in column of 『Note』. If the QP Mode Measured value compliance with the QP Limits and lower than AVG Limits, the EUT shall be deemed to meet both QP & AVG Limits and then only QP Mode was measured, but AVG Mode didn't perform. In this case, a “*” marked in AVG Mode column of Interference Voltage Measured.

EUT	Smart Band	Model Name	NYX-B10
Temperature	24°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz	Phase	Line
Test Mode	Charging+Operating		
Note	COSLIGHT		
Test Engineer	Helen Wang		


80 dBuV

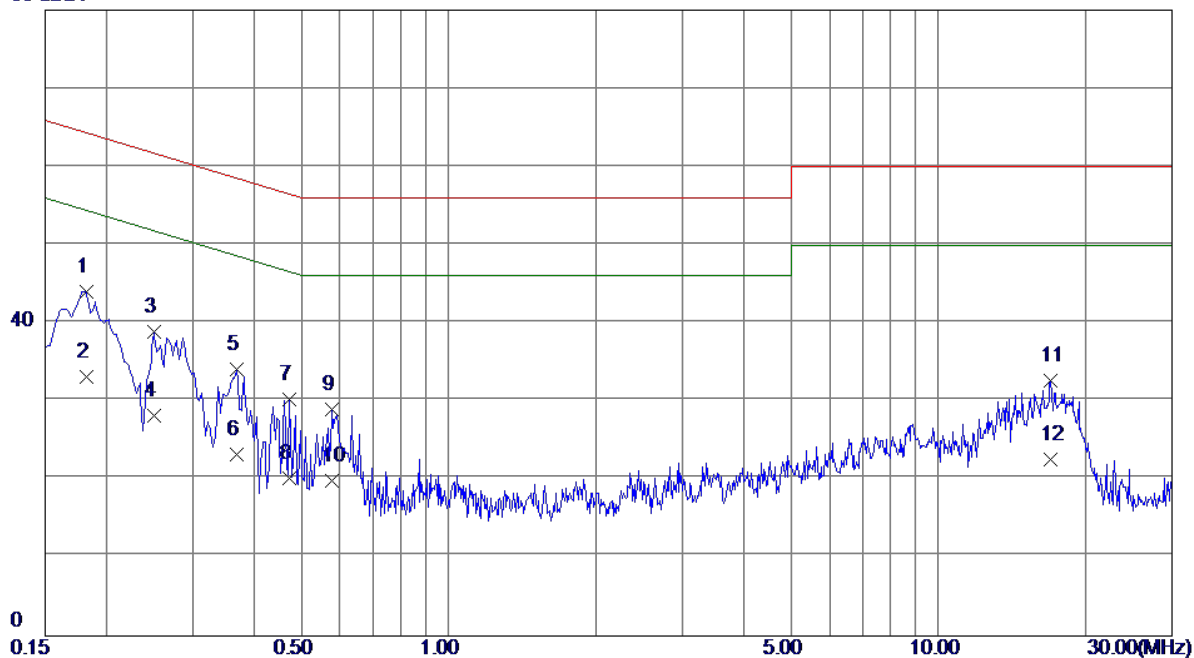

No.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure ment dBuV	Limit dBuV	Margin dB	Detector
1 *	0.1819	34.47	9.57	44.04	64.40	-20.36	QP
2	0.1819	23.50	9.57	33.07	54.40	-21.33	AVG
3	0.2500	29.30	9.57	38.87	61.76	-22.89	QP
4	0.2500	18.60	9.57	28.17	51.76	-23.59	AVG
5	0.3700	24.56	9.58	34.14	58.50	-24.36	QP
6	0.3700	13.69	9.58	23.27	48.50	-25.23	AVG
7	0.4740	20.64	9.66	30.30	56.44	-26.14	QP
8	0.4740	10.50	9.66	20.16	46.44	-26.28	AVG
9	0.5780	19.30	9.70	29.00	56.00	-27.00	QP
10	0.5780	10.20	9.70	19.90	46.00	-26.10	AVG
11	16.9860	21.92	10.74	32.66	60.00	-27.34	QP
12	16.9860	11.87	10.74	22.61	50.00	-27.39	AVG

EUT	Smart Band	Model Name	NYX-B10
Temperature	24°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz	Phase	Neutral
Test Mode	Charging+Operating		
Note	COSLIGHT		
Test Engineer	Helen Wang		


80 dBuV

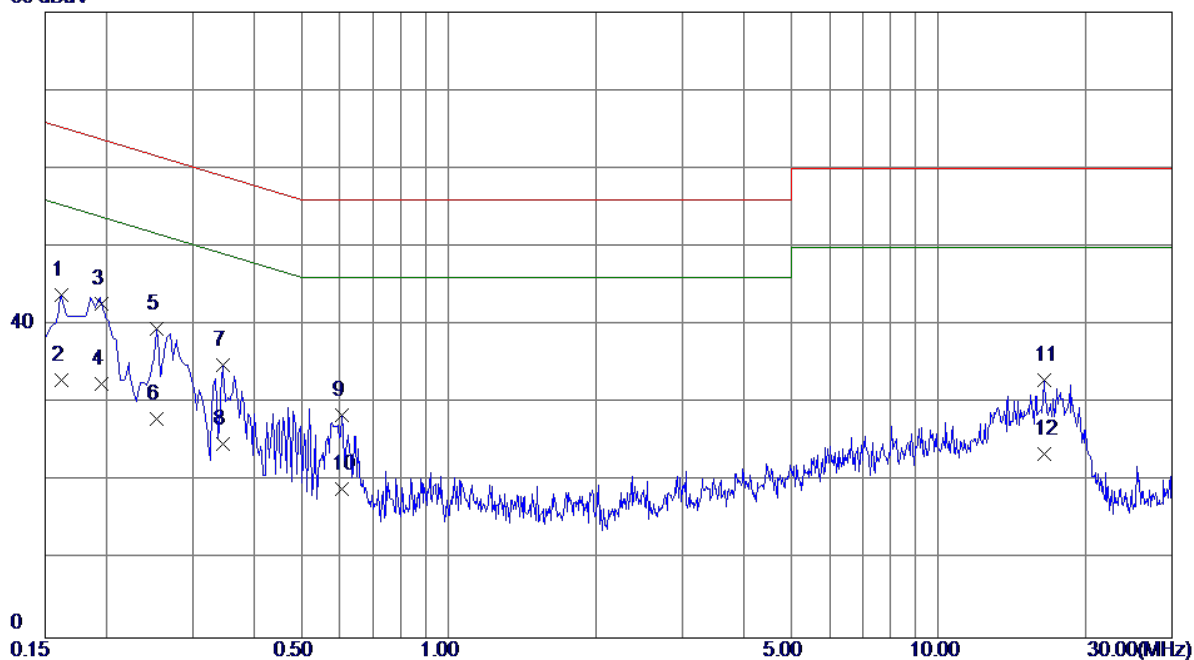

No.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure ment dBuV	Limit dBuV	Margin dB	Detector
1	0.1620	34.35	9.51	43.86	65.36	-21.50	QP
2	0.1620	23.50	9.51	33.01	55.36	-22.35	AVG
3 *	0.1955	33.20	9.56	42.76	63.80	-21.04	QP
4	0.1955	22.89	9.56	32.45	53.80	-21.35	AVG
5	0.2540	29.91	9.57	39.48	61.63	-22.15	QP
6	0.2540	18.50	9.57	28.07	51.63	-23.56	AVG
7	0.3460	25.25	9.58	34.83	59.06	-24.23	QP
8	0.3460	15.30	9.58	24.88	49.06	-24.18	AVG
9	0.6060	18.95	9.50	28.45	56.00	-27.55	QP
10	0.6060	9.50	9.50	19.00	46.00	-27.00	AVG
11	16.4180	22.14	10.76	32.90	60.00	-27.10	QP
12	16.4180	12.70	10.76	23.46	50.00	-26.54	AVG

EUT	Smart Band	Model Name	NYX-B10
Temperature	24°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz	Phase	Line
Test Mode	Charging+Operating		
Note	LISHEN		
Test Engineer	Helen Wang		


80 dBuV

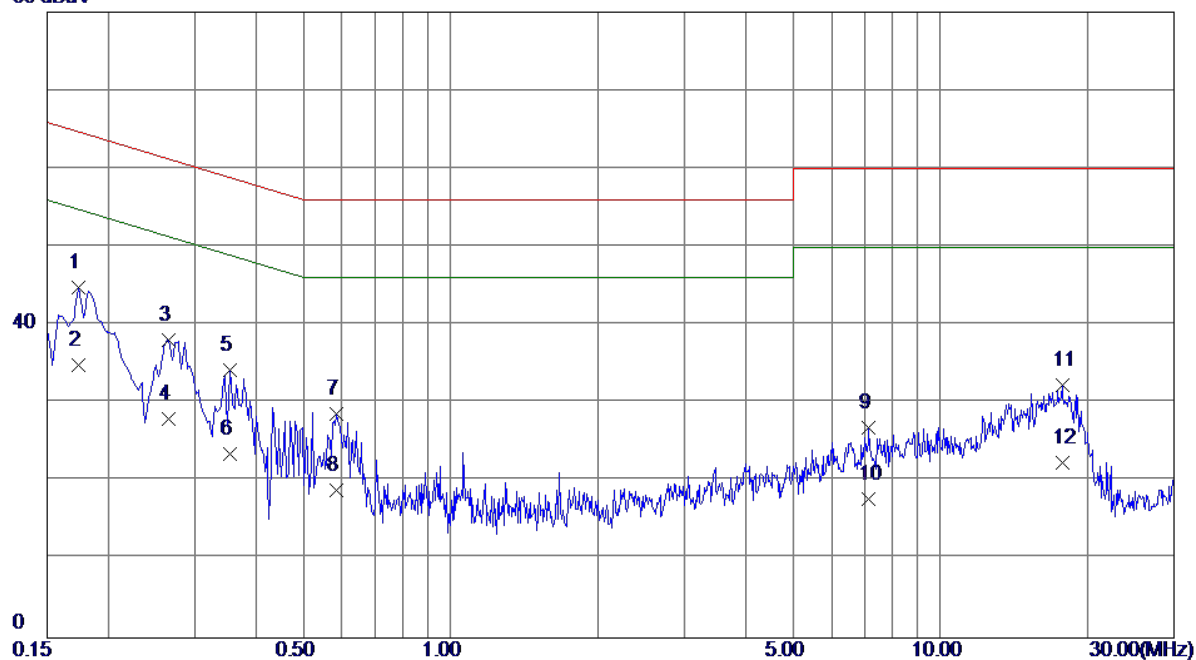

No.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure ment dBuV	Limit dBuV	Margin dB	Detector
1	0.1740	35.25	9.57	44.82	64.77	-19.95	QP
2 *	0.1740	25.30	9.57	34.87	54.77	-19.90	AVG
3	0.2660	28.47	9.57	38.04	61.24	-23.20	QP
4	0.2660	18.50	9.57	28.07	51.24	-23.17	AVG
5	0.3540	24.61	9.58	34.19	58.87	-24.68	QP
6	0.3540	13.90	9.58	23.48	48.87	-25.39	AVG
7	0.5860	18.88	9.70	28.58	56.00	-27.42	QP
8	0.5860	9.20	9.70	18.90	46.00	-27.10	AVG
9	7.1460	16.50	10.41	26.91	60.00	-33.09	QP
10	7.1460	7.30	10.41	17.71	50.00	-32.29	AVG
11	17.7500	21.58	10.75	32.33	60.00	-27.67	QP
12	17.7500	11.60	10.75	22.35	50.00	-27.65	AVG

EUT	Smart Band	Model Name	NYX-B10
Temperature	24°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz	Phase	Neutral
Test Mode	Charging+Operating		
Note	LISHEN		
Test Engineer	Helen Wang		

80 dBuV

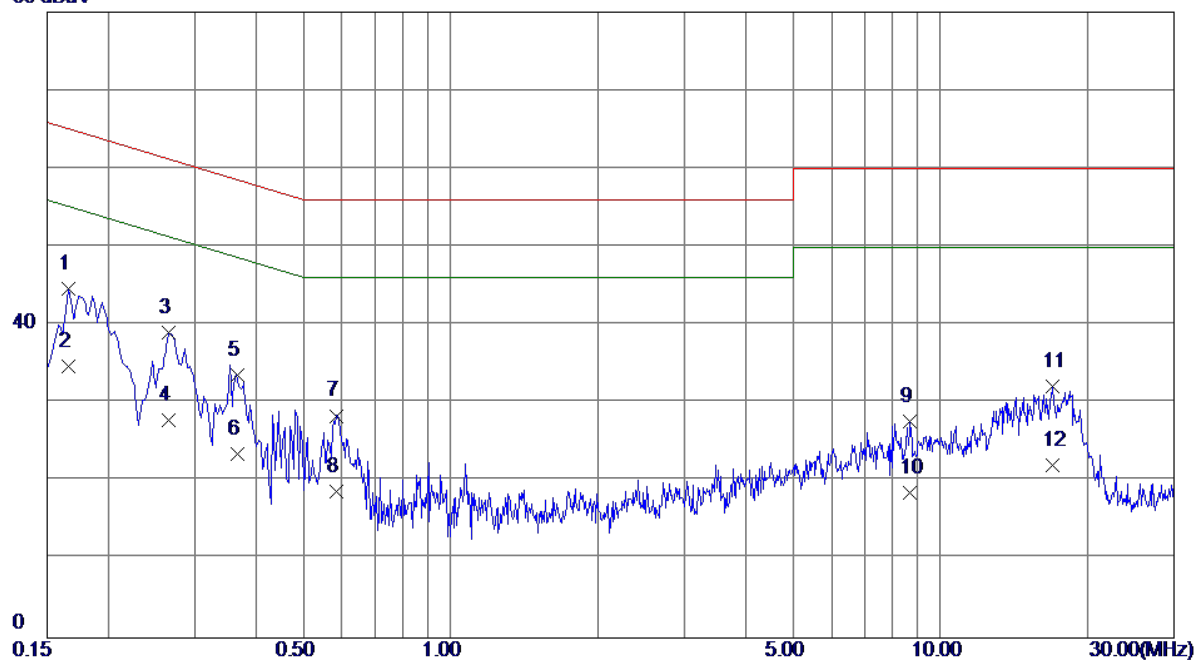

No.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure ment dBuV	Limit dBuV	Margin dB	Detector
1	0.1660	35.09	9.49	44.58	65.16	-20.58	QP
2 *	0.1660	25.30	9.49	34.79	55.16	-20.37	AVG
3	0.2660	29.50	9.57	39.07	61.24	-22.17	QP
4	0.2660	18.25	9.57	27.82	51.24	-23.42	AVG
5	0.3660	24.07	9.55	33.62	58.59	-24.97	QP
6	0.3660	13.90	9.55	23.45	48.59	-25.14	AVG
7	0.5860	18.90	9.50	28.40	56.00	-27.60	QP
8	0.5860	9.20	9.50	18.70	46.00	-27.30	AVG
9	8.6860	17.25	10.42	27.67	60.00	-32.33	QP
10	8.6860	8.20	10.42	18.62	50.00	-31.38	AVG
11	16.9260	21.33	10.78	32.11	60.00	-27.89	QP
12	16.9260	11.30	10.78	22.08	50.00	-27.92	AVG

4.2 RADIATED EMISSION MEASUREMENT

4.2.1 LIMITS OF RADIATED EMISSION MEASUREMENT

Below 1 GHz

Measurement Method and Applied Limits:

ANSI C63.4:

Frequency (MHz)	Class A (at 10m)		Class B (at 3m)	
	(uV/m) Field strength	(dBuV/m) Field strength	(uV/m) Field strength	(dBuV/m) Field strength
30 - 88	90	39	100	40
88 - 216	150	43.5	150	43.5
216 - 960	210	46.4	200	46
Above 960	300	49.5	500	54

Above 1 GHz

Measurement Method and Applied Limits:

ANSI C63.4:

Frequency (MHz)	Class A				Class B	
	(dBuV/m) (at 3m)		(dBuV/m) (at 10m)		(dBuV/m) (at 3m)	
	Peak	Average	Peak	Average	Peak	Average
Above 1000	80	60	69.5	49.5	74	54

FREQUENCY RANGE OF RADIATED MEASUREMENT (FOR UNINTENTIONAL RADIATORS)

Highest frequency generated or Upper frequency of measurement used in the device or on which the device operates or tunes (MHz)	Range (MHz)
Below 1.705	30
1.705 - 108	1000
108 - 500	2000
500 - 1000	5000
Above 1000	5 th harmonic of the highest frequency or 40 GHz, whichever is lower

NOTE:

- (1) The limit for radiated test was performed according to as following:
FCC Part15, Subpart B.
- (2) The tighter limit applies at the band edges.
- (3) Emission level (dBuV/m) = 20log Emission level (uV/m).
3m Emission level = 10m Emission level + 20log(10m/3m).
- (4) The test result calculated as following:
Measurement Value = Reading Level + Correct Factor
Correct Factor = Antenna Factor + Cable Loss - Amplifier Gain(if use)
Margin Level = Measurement Value - Limit Value

4.2.2 MEASUREMENT INSTRUMENTS LIST

Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Measurement Software	Farad	EZ-EMC Ver.NB-03A 1-01	N/A	N/A
2	Amplifier	Agilent	8449B	3008A02274	Feb. 22, 2018
3	Amplifier	HP	8447D	1937A02847	Feb. 22, 2018
4	RF Pre-selector	Agilent	N9039A	MY46520201	Sep. 04, 2017
5	Cable	emci	LMR-400(3 0MHz-1GH z)(10m+2.5 m)	N/A	Jun. 27, 2017
6	Cable	emci	EMC104-S M-SM-1000 0 (1GHz— 26.5GHz)(1 0m)	N/A	Jun. 30, 2017
7	Controller	CT	SC100	N/A	N/A
8	Double Ridged Guide Antenna	ETS	3115	00075789	Mar. 26, 2018
9	Antenna	Schwarbeck	VULB9160	9160-3232	Mar. 26, 2018

Remark: "N/A" denotes no model name, serial no. or calibration specified.

All calibration period of equipment list is one year.

4.2.3 TEST PROCEDURE


- a. The measuring distance of 3 m shall be used for measurements. The EUT was placed on the top of a rotating table 0.8 meter above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.(below 1GHz)
- b. The measuring distance of 3 m shall be used for measurements. The EUT was placed on the top of a rotating table 0.8 meter above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.(above 1GHz)
- c. The height of the equipment or of the substitution antenna shall be 0.8 m, the height of the test antenna shall vary between 1 m to 4 m. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights find the maximum reading (used Bore sight function).
- e. The receiver system was set to peak and average detect function and specified bandwidth with maximum hold mode when the test frequency is above 1GHz.
- f. The initial step in collecting radiated emission data is a receiver peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured.
- g. All readings are Peak unless otherwise stated QP in column of Note. Peak denotes that the Peak reading compliance with the QP Limits and then QP Mode measurement didn't perform. (below 1GHz)
- h. All readings are Peak Mode value unless otherwise stated AVG in column of Note. If the Peak Mode Measured value compliance with the Peak Limits and lower than AVG Limits, the EUT shall be deemed to meet both Peak & AVG Limits and then only Peak Mode was measured, but AVG Mode didn't perform. (above 1GHz)
- i. For the actual test configuration, please refer to the related Item - Block Diagram of system tested (please refer to 3.3).

4.2.4 DEVIATION FROM TEST STANDARD


No deviation

4.2.5 TEST SETUP

(A) Radiated Emission Test Set-Up Frequency Below 1 GHz

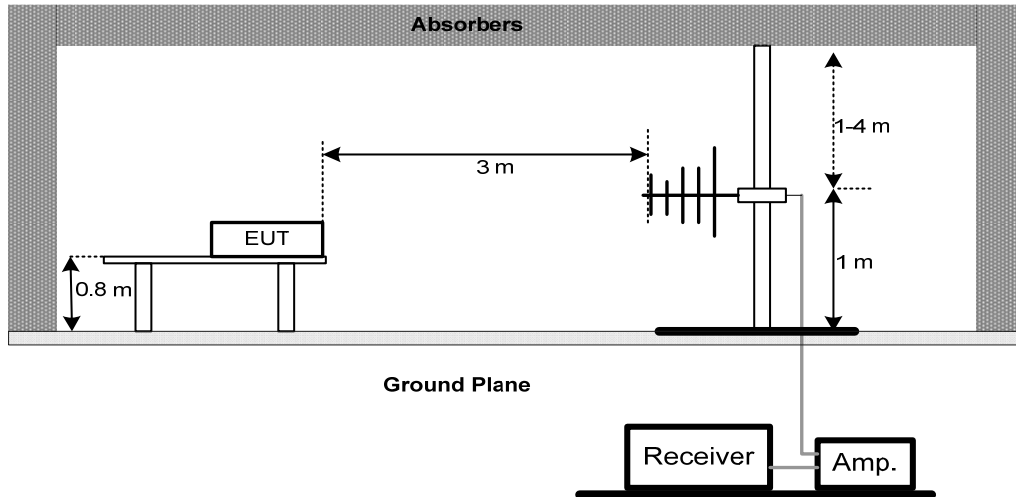

(B) Radiated Emission Test Set-Up Frequency 1 GHz

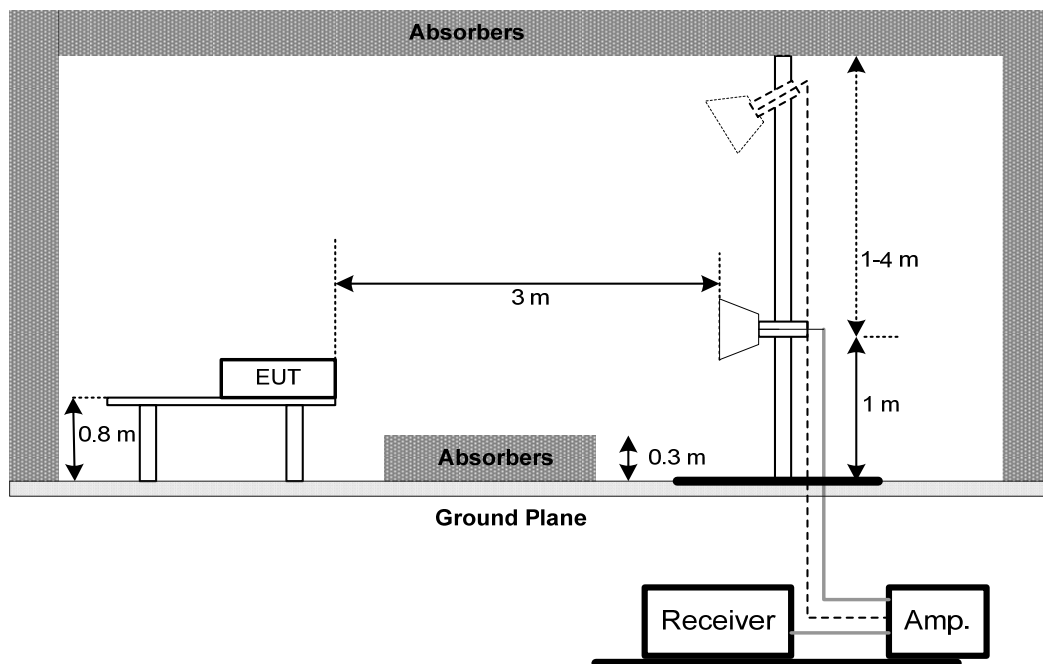


4.2.6 TEST RESULTS-BELOW 1GHZ

Remark :


- (1) All readings are Peak unless otherwise stated QP in column of 『Note』 . Peak denotes that the Peak reading compliance with the QP Limits and then QP Mode measurement didn't perform ◦
- (2) Measuring frequency range from 30MHz to 1000MHz ◦
- (3) If the peak scan value lower limit more than 20dB, then this signal data does not show in table ◦

EUT	Smart Band	Model Name	NYX-B10
Temperature	25°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz	Polarization	Vertical
Test Mode	Operating		
Note	COSLIGHT		
Test Engineer	Helen Wang		

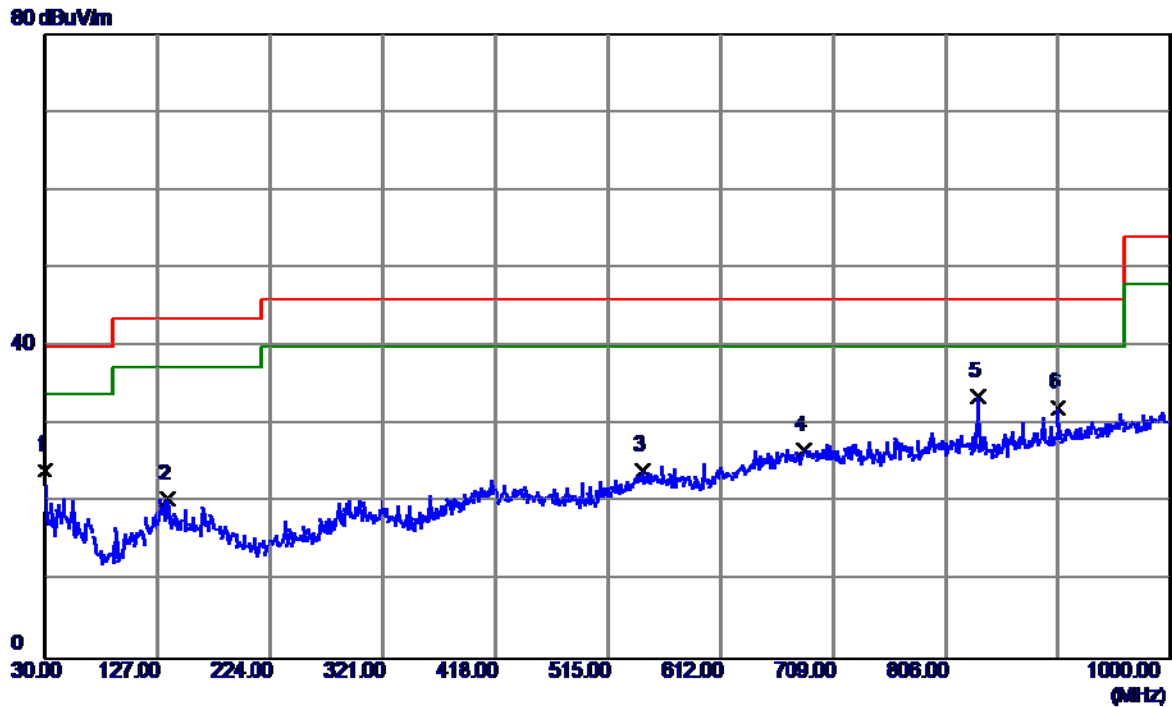


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector
1	30.0000	36.96	-12.80	24.16	40.00	-15.84	QP
2	135.7300	32.09	-11.56	20.53	43.50	-22.97	QP
3	545.5550	28.83	-4.73	24.10	46.00	-21.90	QP
4	684.2650	27.75	-0.98	26.77	46.00	-19.23	QP
5 *	833.6450	33.03	0.60	33.63	46.00	-12.37	QP
6	902.5150	30.41	1.76	32.17	46.00	-13.83	QP

EUT	Smart Band	Model Name	NYX-B10
Temperature	25°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz	Polarization	Horizontal
Test Mode	Operating		
Note	COSLIGHT		
Test Engineer	Helen Wang		

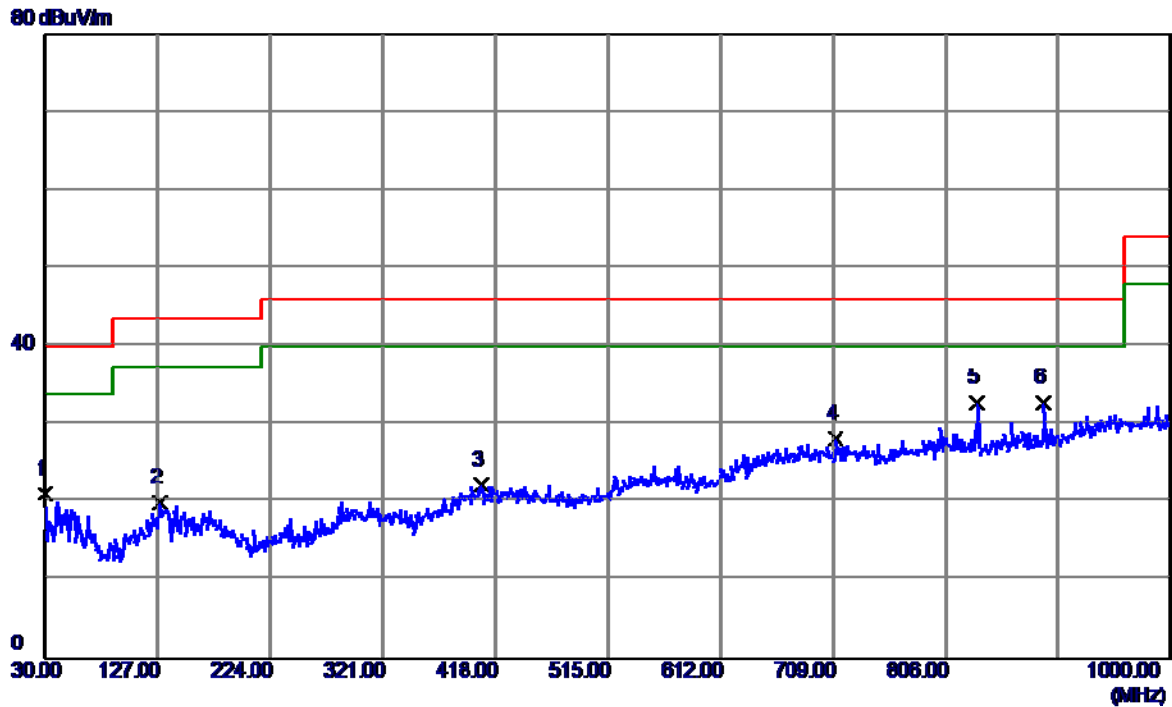


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector
1	30.0000	33.92	-12.80	21.12	40.00	-18.88	QP
2	129.4250	31.18	-11.23	19.95	43.50	-23.55	QP
3	406.3599	29.46	-7.18	22.28	46.00	-23.72	QP
4	710.9400	28.87	-0.70	28.17	46.00	-17.83	QP
5 *	833.1599	32.24	0.60	32.84	46.00	-13.16	QP
6	890.3900	31.26	1.47	32.73	46.00	-13.27	QP

EUT	Smart Band	Model Name	NYX-B10
Temperature	25°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz	Polarization	Vertical
Test Mode	Operating		
Note	LISHEN		
Test Engineer	Helen Wang		

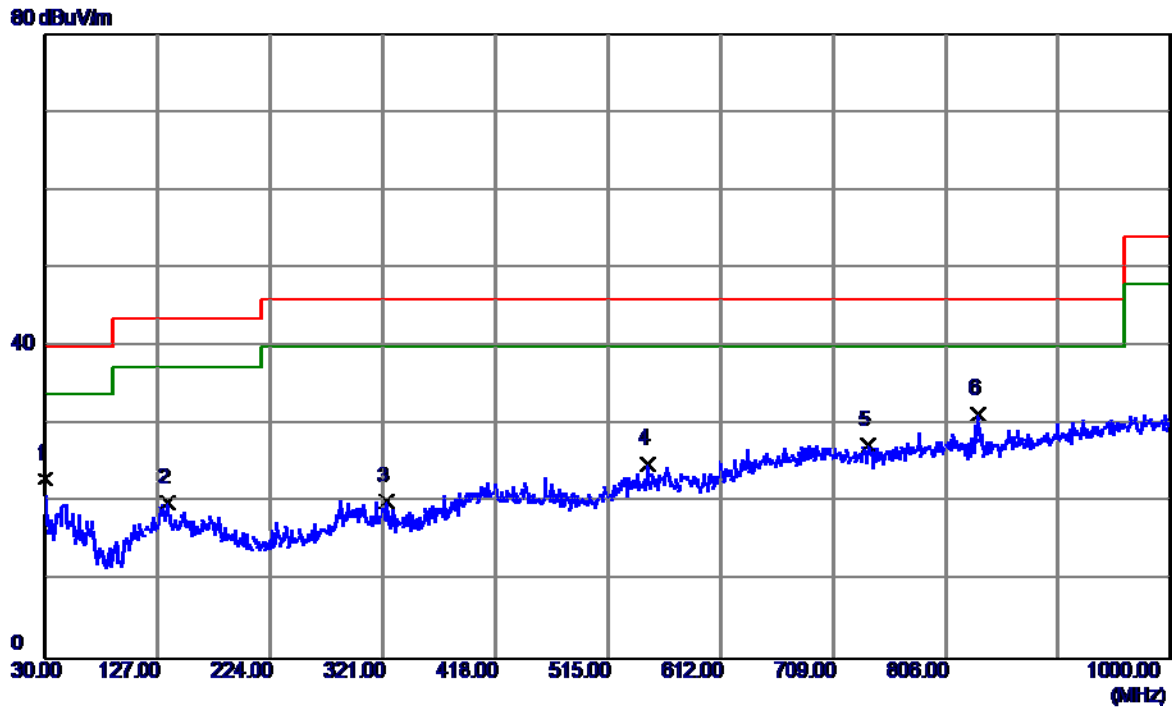


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector
1	30.0000	35.91	-12.80	23.11	40.00	-16.89	QP
2	135.2450	31.59	-11.53	20.06	43.50	-23.44	QP
3	323.9100	30.46	-10.34	20.12	46.00	-25.88	QP
4	549.4350	29.49	-4.48	25.01	46.00	-20.99	QP
5	739.0700	28.24	-0.82	27.42	46.00	-18.58	QP
6 *	834.1300	30.75	0.60	31.35	46.00	-14.65	QP

EUT	Smart Band	Model Name	NYX-B10
Temperature	25°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz	Polarization	Horizontal
Test Mode	Operating		
Note	LISHEN		
Test Engineer	Helen Wang		

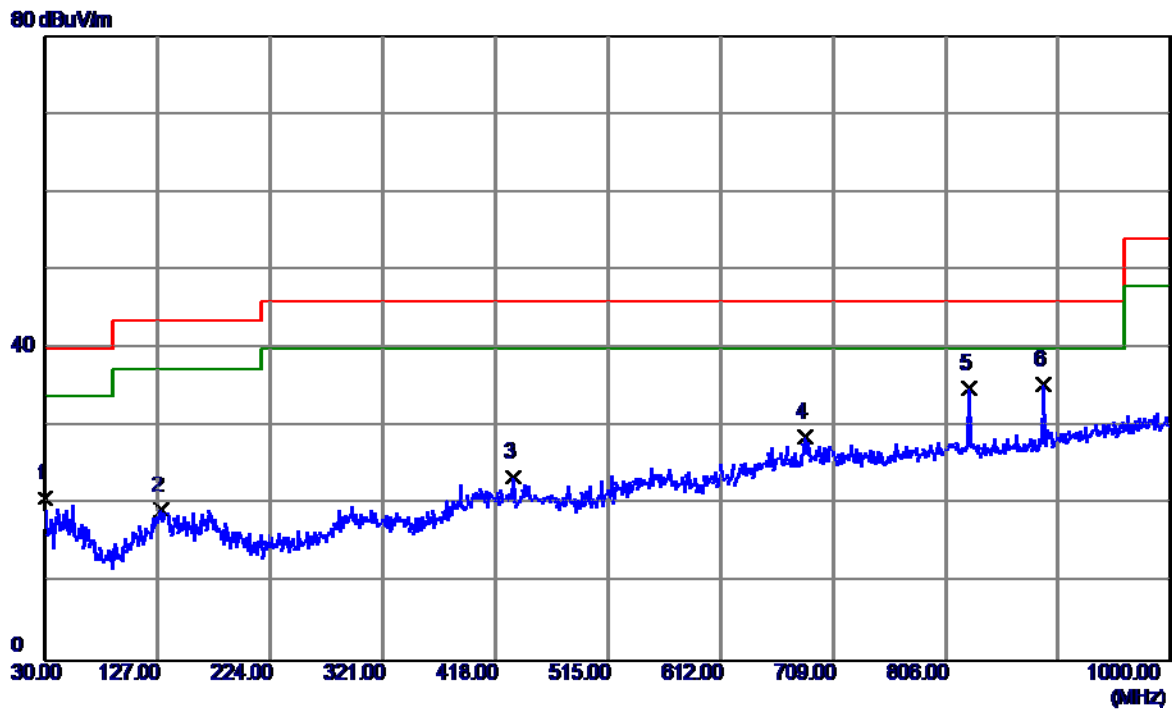

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector
1	30.0000	33.65	-12.80	20.85	40.00	-19.15	QP
2	130.3950	30.45	-11.17	19.28	43.50	-24.22	QP
3	433.0350	30.63	-7.12	23.51	46.00	-22.49	QP
4	685.2350	29.57	-0.96	28.61	46.00	-17.39	QP
5	826.3700	34.21	0.60	34.81	46.00	-11.19	QP
6 *	890.3900	33.87	1.47	35.34	46.00	-10.66	QP


EUT	Smart Band	Model Name	NYX-B10
Temperature	25°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz	Polarization	Vertical
Test Mode	Charging+Operating		
Note	COSLIGHT		
Test Engineer	Helen Wang		

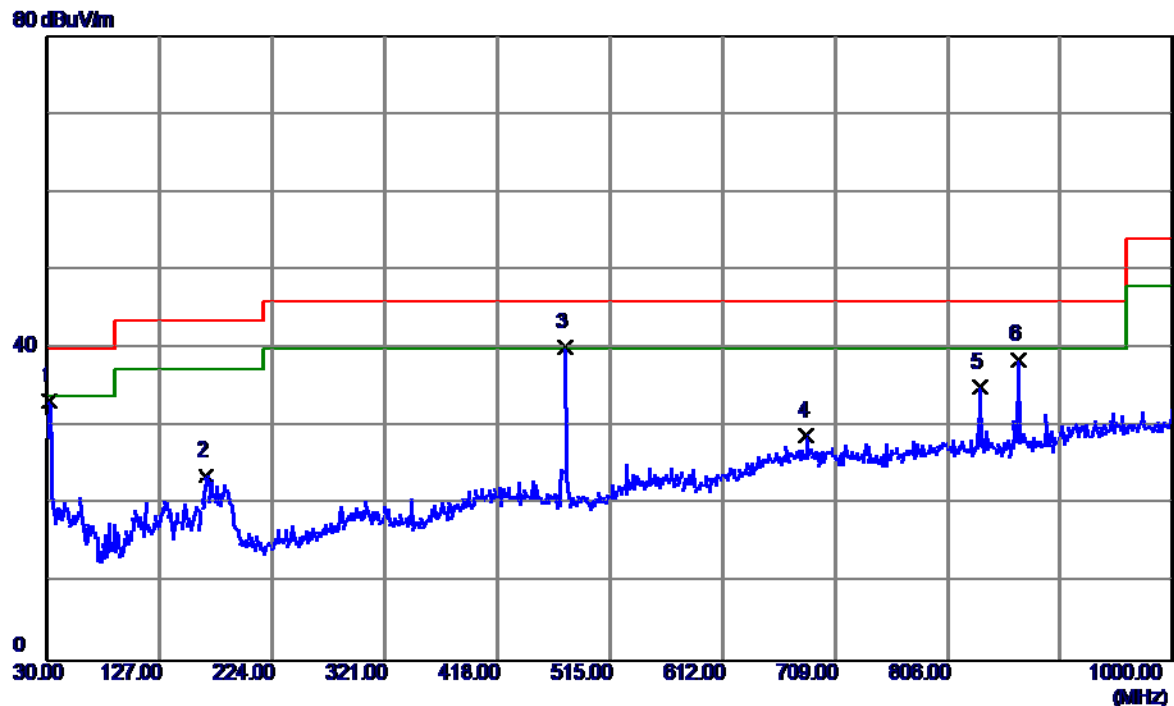

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector
1	31.9400	46.51	-13.17	33.34	40.00	-6.66	QP
2	166.7700	35.01	-11.30	23.71	43.50	-19.79	QP
3 *	476.6850	47.59	-7.38	40.21	46.00	-5.79	QP
4	684.7500	29.74	-0.97	28.77	46.00	-17.23	QP
5	834.1300	34.48	0.60	35.08	46.00	-10.92	QP
6	867.1100	37.65	0.97	38.62	46.00	-7.38	QP


EUT	Smart Band	Model Name	NYX-B10
Temperature	25°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz	Polarization	Horizontal
Test Mode	Charging+Operating		
Note	COSLIGHT		
Test Engineer	Helen Wang		

80 dBuV/m

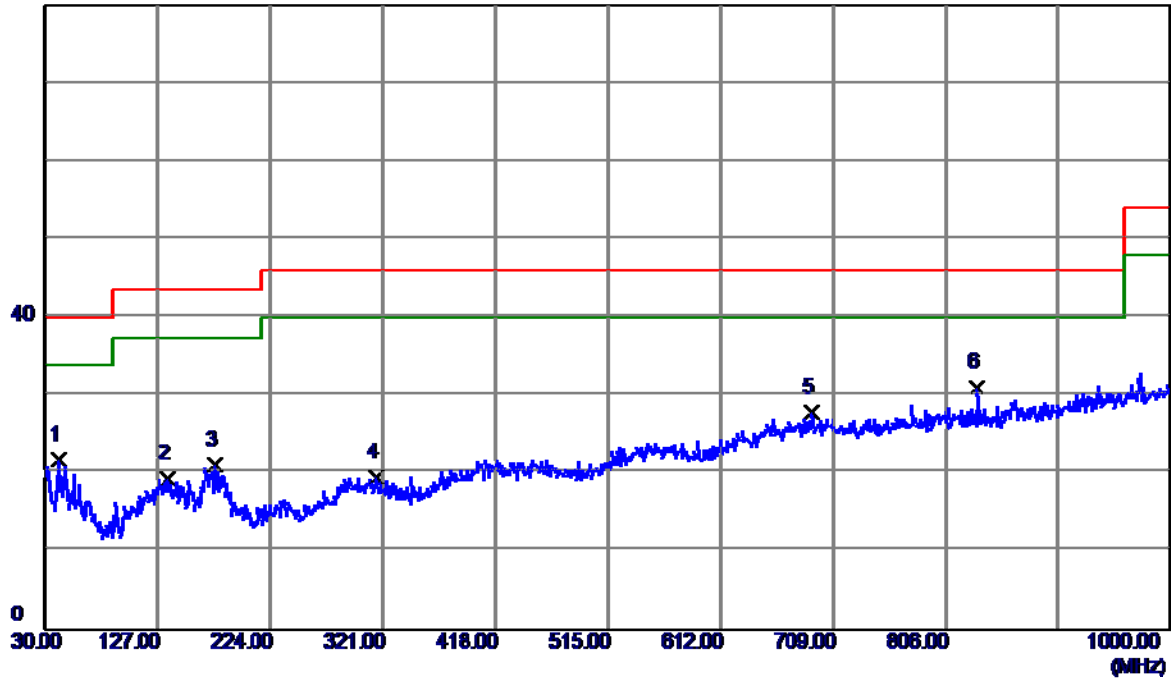


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector
1	41.6400	33.86	-12.17	21.69	40.00	-18.31	QP
2	135.2450	30.86	-11.53	19.33	43.50	-24.17	QP
3	176.4700	32.78	-11.64	21.14	43.50	-22.36	QP
4	315.1800	29.72	-10.19	19.53	46.00	-26.47	QP
5	691.0550	28.70	-0.84	27.86	46.00	-18.14	QP
6 *	833.1599	30.45	0.60	31.05	46.00	-14.95	QP

EUT	Smart Band	Model Name	NYX-B10
Temperature	25°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz	Polarization	Vertical
Test Mode	Charging+Operating		
Note	LISHEN		
Test Engineer	Helen Wang		

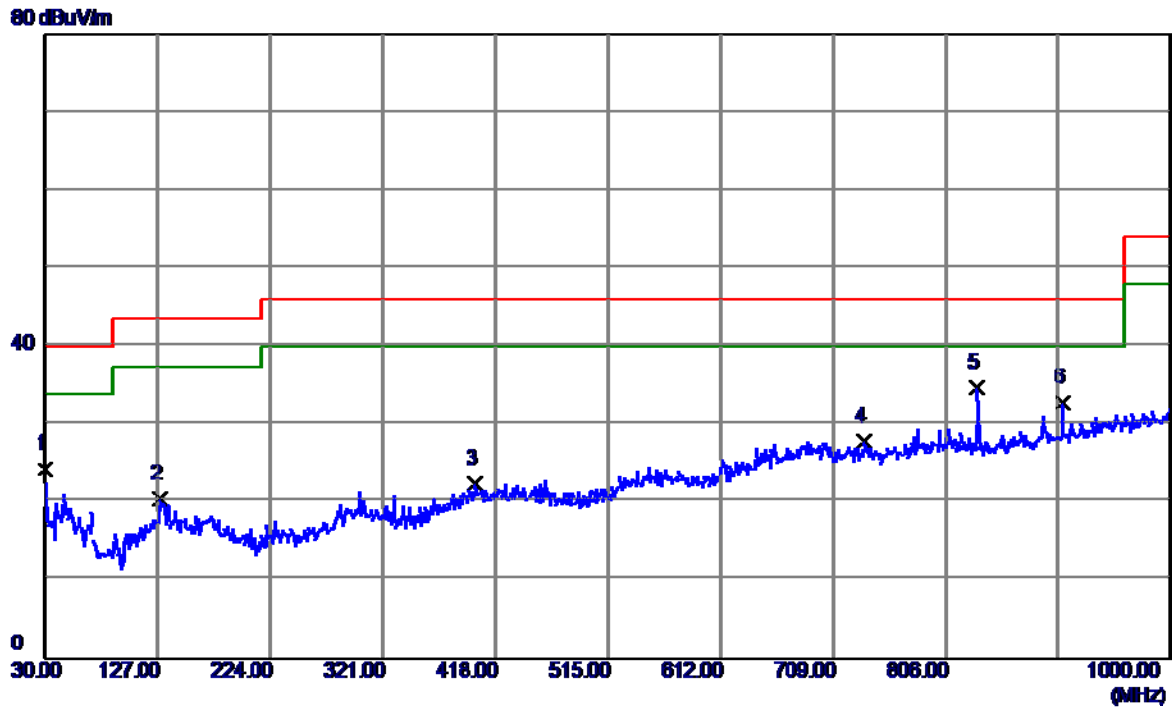

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector
1	30.0000	37.12	-12.80	24.32	40.00	-15.68	QP
2	128.9400	31.85	-11.30	20.55	43.50	-22.95	QP
3	400.5400	29.58	-7.20	22.38	46.00	-23.62	QP
4	735.6750	28.71	-0.81	27.90	46.00	-18.10	QP
5 *	833.1599	34.11	0.60	34.71	46.00	-11.29	QP
6	906.8800	30.96	1.89	32.85	46.00	-13.15	QP

EUT	Smart Band	Model Name	NYX-B10
Temperature	25°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz	Polarization	Horizontal
Test Mode	Charging+Operating		
Note	LISHEN		
Test Engineer	Helen Wang		

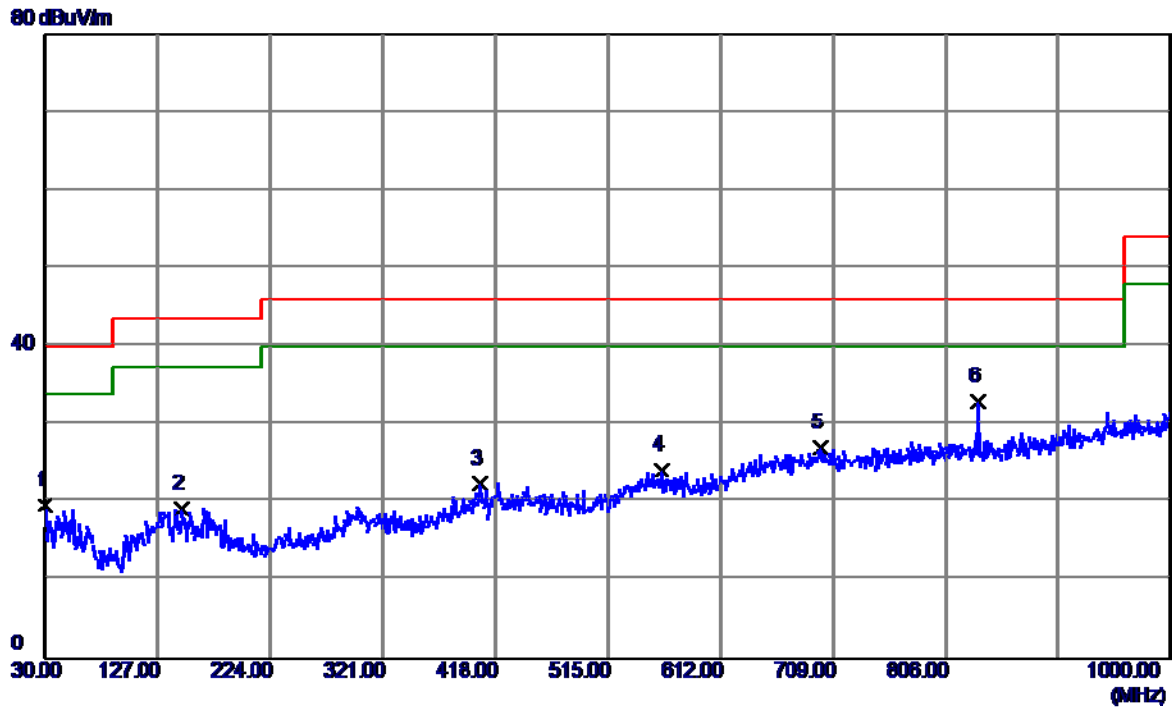


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector
1	30.0000	32.45	-12.80	19.65	40.00	-20.35	QP
2	147.3700	31.17	-11.91	19.26	43.50	-24.24	QP
3	405.3900	29.58	-7.19	22.39	46.00	-23.61	QP
4	561.0750	28.67	-4.53	24.14	46.00	-21.86	QP
5	698.3300	27.75	-0.68	27.07	46.00	-18.93	QP
6 *	833.6450	32.41	0.60	33.01	46.00	-12.99	QP

4.2.7 TEST RESULTS-ABOVE 1GHZ

Remark :

- (1) All readings are Peak unless otherwise stated QP in column of『 Note 』. Peak denotes that the Peak reading compliance with the QP Limits and then QP Mode measurement didn't perform.
- (2) Radiated emissions measured in frequency range above 1000MHz were made with an instrument using Peak detector mode and AV detector mode of the emission.
- (3) Data of measurement within this frequency range shown “ * ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (4) A preamp and high pass filter were used for this test in order to provide sufficient measurement sensitivity.


EUT	Smart Band	Model Name	NYX-B10
Temperature	25°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz	Polarization	Vertical
Test Mode	Operating		
Note	COSLIGHT		
Test Engineer	Helen Wang		

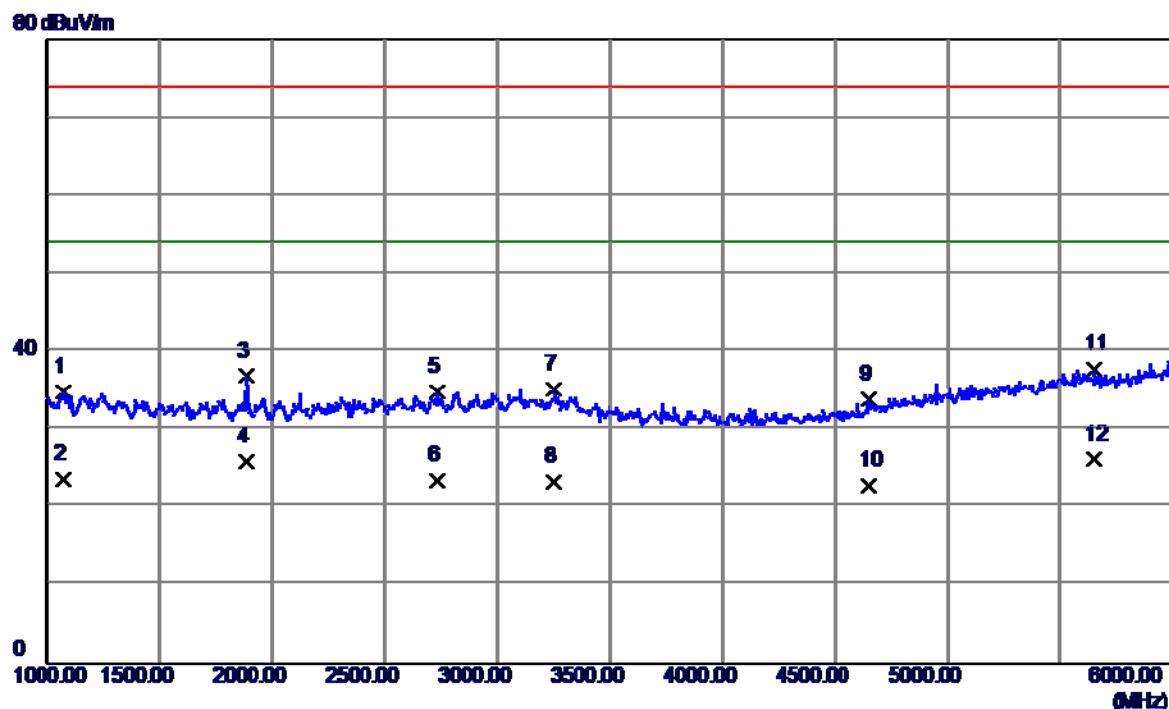

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector
1	1070.0000	41.33	-6.48	34.85	74.00	-39.15	Peak
2	1070.0000	30.10	-6.48	23.62	54.00	-30.38	AVG
3	1885.0000	40.00	-3.12	36.88	74.00	-37.12	Peak
4	1885.0000	29.10	-3.12	25.98	54.00	-28.02	AVG
5	2732.5000	33.66	1.21	34.87	74.00	-39.13	Peak
6	2732.5000	22.29	1.21	23.50	54.00	-30.50	AVG
7	3252.5000	32.93	2.33	35.26	74.00	-38.74	Peak
8	3252.5000	21.10	2.33	23.43	54.00	-30.57	AVG
9	4652.5000	29.35	4.62	33.97	74.00	-40.03	Peak
10	4652.5000	18.30	4.62	22.92	54.00	-31.08	AVG
11	5650.0000	29.59	8.14	37.73	74.00	-36.27	Peak
12 *	5650.0000	18.10	8.14	26.24	54.00	-27.76	AVG


EUT	Smart Band	Model Name	NYX-B10
Temperature	25°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz	Polarization	Horizontal
Test Mode	Operating		
Note	COSLIGHT		
Test Engineer	Helen Wang		

80 dBuV/m

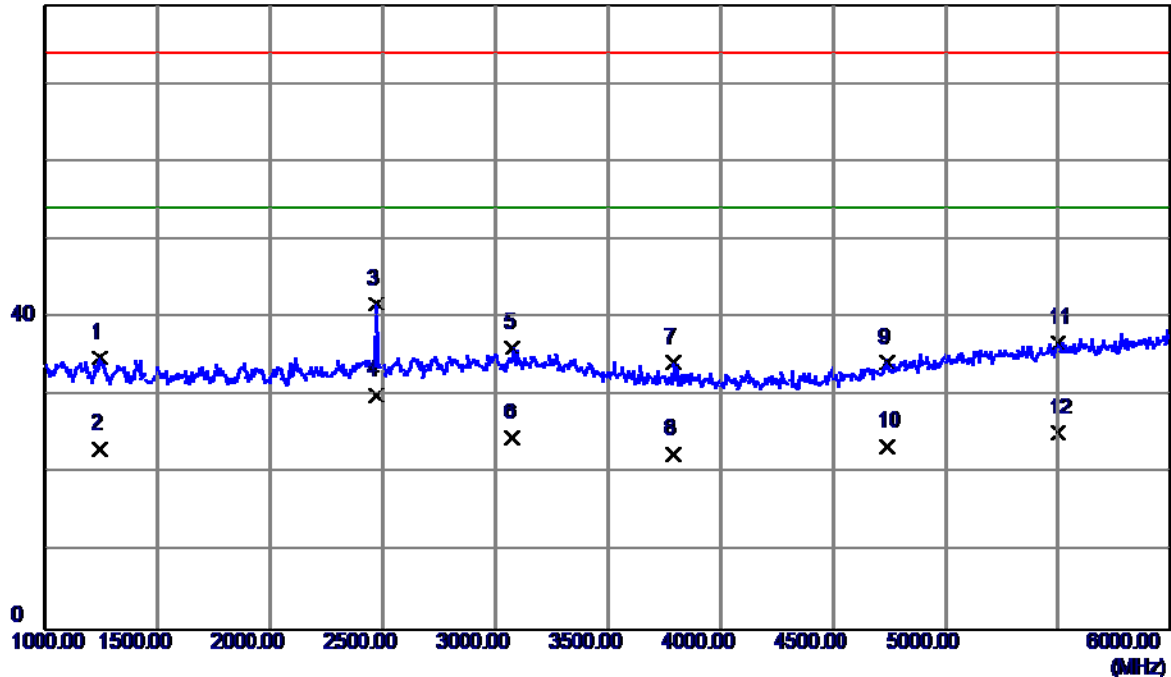


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector
1	1245.0000	40.75	-5.86	34.89	74.00	-39.11	Peak
2	1245.0000	29.10	-5.86	23.24	54.00	-30.76	AVG
3	2472.5000	41.73	0.02	41.75	74.00	-32.25	Peak
4 *	2472.5000	30.10	0.02	30.12	54.00	-23.88	AVG
5	3075.0000	33.80	2.38	36.18	74.00	-37.82	Peak
6	3075.0000	22.30	2.38	24.68	54.00	-29.32	AVG
7	3790.0000	31.72	2.52	34.24	74.00	-39.76	Peak
8	3790.0000	20.10	2.52	22.62	54.00	-31.38	AVG
9	4737.0000	29.19	5.03	34.22	74.00	-39.78	Peak
10	4737.5000	18.51	5.03	23.54	54.00	-30.46	AVG
11	5502.5000	28.86	8.01	36.87	74.00	-37.13	Peak
12	5502.5000	17.30	8.01	25.31	54.00	-28.69	AVG

EUT	Smart Band	Model Name	NYX-B10
Temperature	25°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz	Polarization	Vertical
Test Mode	Operating		
Note	LISHEN		
Test Engineer	Helen Wang		

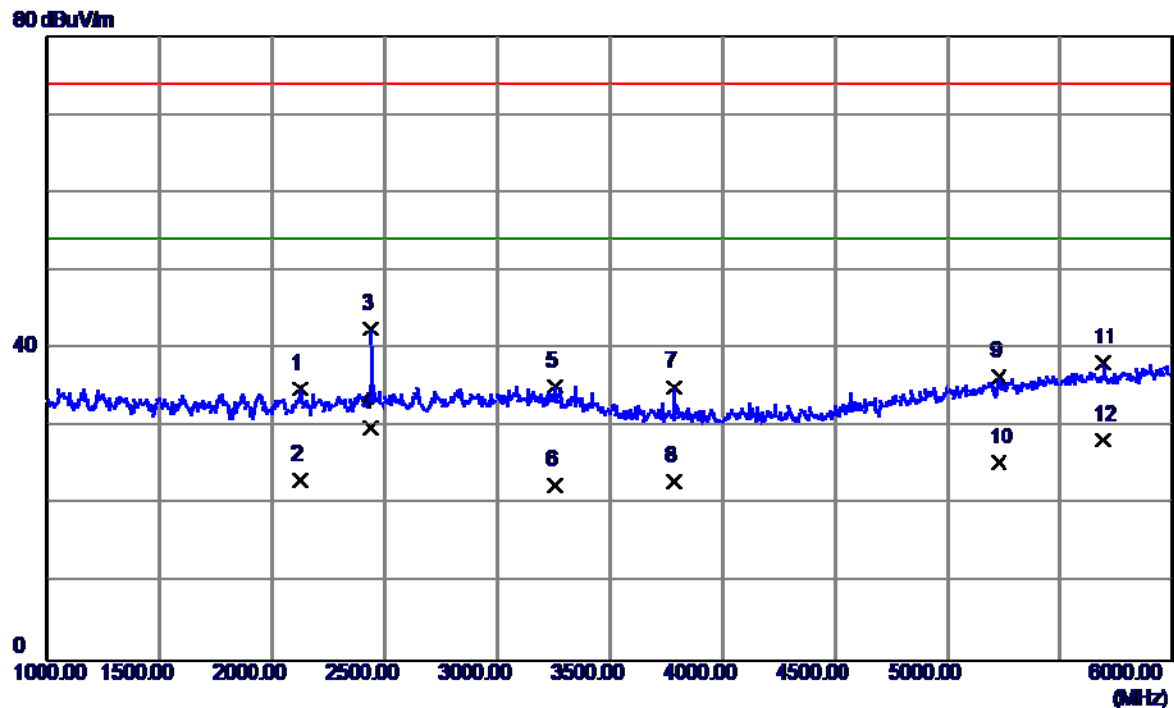

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector
1	2122.5000	36.72	-1.90	34.82	74.00	-39.18	Peak
2	2122.5000	25.10	-1.90	23.20	54.00	-30.80	AVG
3	2440.0000	42.74	-0.16	42.58	74.00	-31.42	Peak
4 *	2440.0000	30.10	-0.16	29.94	54.00	-24.06	AVG
5	3257.5000	32.84	2.33	35.17	74.00	-38.83	Peak
6	3257.5000	20.30	2.33	22.63	54.00	-31.37	AVG
7	3782.5000	32.60	2.52	35.12	74.00	-38.88	Peak
8	3782.5000	20.50	2.52	23.02	54.00	-30.98	AVG
9	5227.5000	29.45	7.08	36.53	74.00	-37.47	Peak
10	5227.5000	18.30	7.08	25.38	54.00	-28.62	AVG
11	5690.0000	30.10	8.18	38.28	74.00	-35.72	Peak
12	5690.0000	20.10	8.18	28.28	54.00	-25.72	AVG


EUT	Smart Band	Model Name	NYX-B10
Temperature	25°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz	Polarization	Horizontal
Test Mode	Operating		
Note	LISHEN		
Test Engineer	Helen Wang		

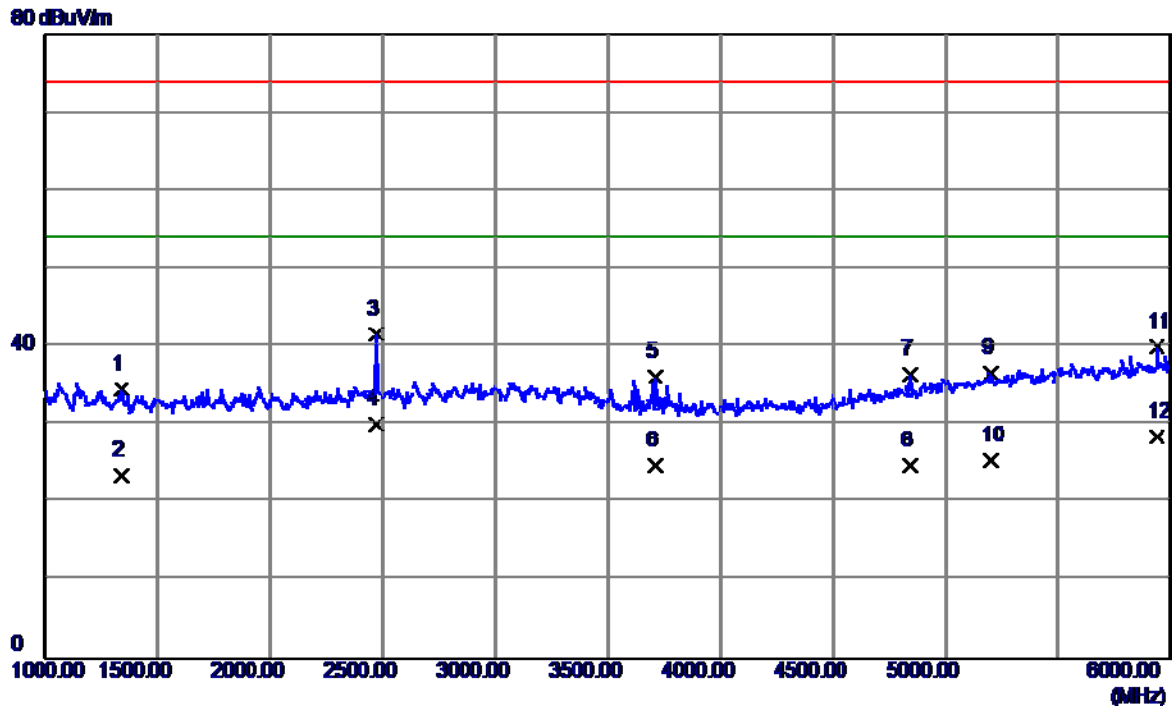

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector
1	1340.0000	40.02	-5.52	34.50	74.00	-39.50	Peak
2	1340.0000	29.10	-5.52	23.58	54.00	-30.42	AVG
3	2470.0000	41.61	0.01	41.62	74.00	-32.38	Peak
4 *	2470.0000	30.10	0.01	30.11	54.00	-23.89	AVG
5	3712.5000	33.64	2.45	36.09	74.00	-37.91	Peak
6	3712.5000	22.30	2.45	24.75	54.00	-29.25	AVG
7	4842.5000	30.88	5.54	36.42	74.00	-37.58	Peak
8	4842.5000	19.30	5.54	24.84	54.00	-29.16	AVG
9	5200.0000	29.69	6.99	36.68	74.00	-37.32	Peak
10	5200.0000	18.50	6.99	25.49	54.00	-28.51	AVG
11	5937.5000	31.57	8.40	39.97	74.00	-34.03	Peak
12	5937.5000	20.11	8.40	28.51	54.00	-25.49	AVG

EUT	Smart Band	Model Name	NYX-B10
Temperature	25°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz	Polarization	Vertical
Test Mode	Operating		
Note	COSLIGHT		
Test Engineer	Helen Wang		


80 dBuV/m

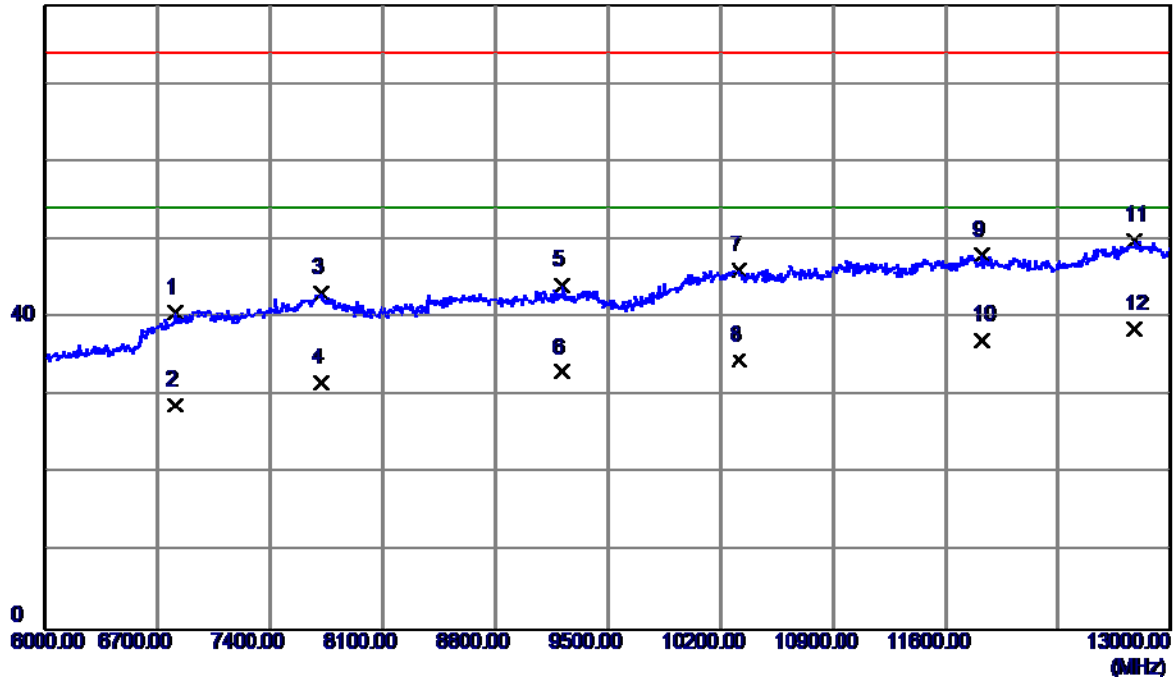

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector
1	6808.5000	29.82	10.75	40.57	74.00	-33.43	Peak
2	6808.5000	18.09	10.75	28.84	54.00	-25.16	AVG
3	7722.0000	30.56	12.58	43.14	74.00	-30.86	Peak
4	7722.0000	19.10	12.58	31.68	54.00	-22.32	AVG
5	9213.0000	29.57	14.53	44.10	74.00	-29.90	Peak
6	9213.0000	18.51	14.53	33.04	54.00	-20.96	AVG
7	10315.5000	29.87	16.26	46.13	74.00	-27.87	Peak
8	10315.5000	18.30	16.26	34.56	54.00	-19.44	AVG
9	11824.0000	30.35	17.65	48.00	74.00	-26.00	Peak
10	11824.0000	19.49	17.65	37.14	54.00	-16.86	AVG
11	12776.0000	31.38	18.49	49.87	74.00	-24.13	Peak
12 *	12776.0000	20.10	18.49	38.59	54.00	-15.41	AVG

EUT	Smart Band	Model Name	NYX-B10
Temperature	25°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz	Polarization	Horizontal
Test Mode	Operating		
Note	COSLIGHT		
Test Engineer	Helen Wang		


80 dBuV/m

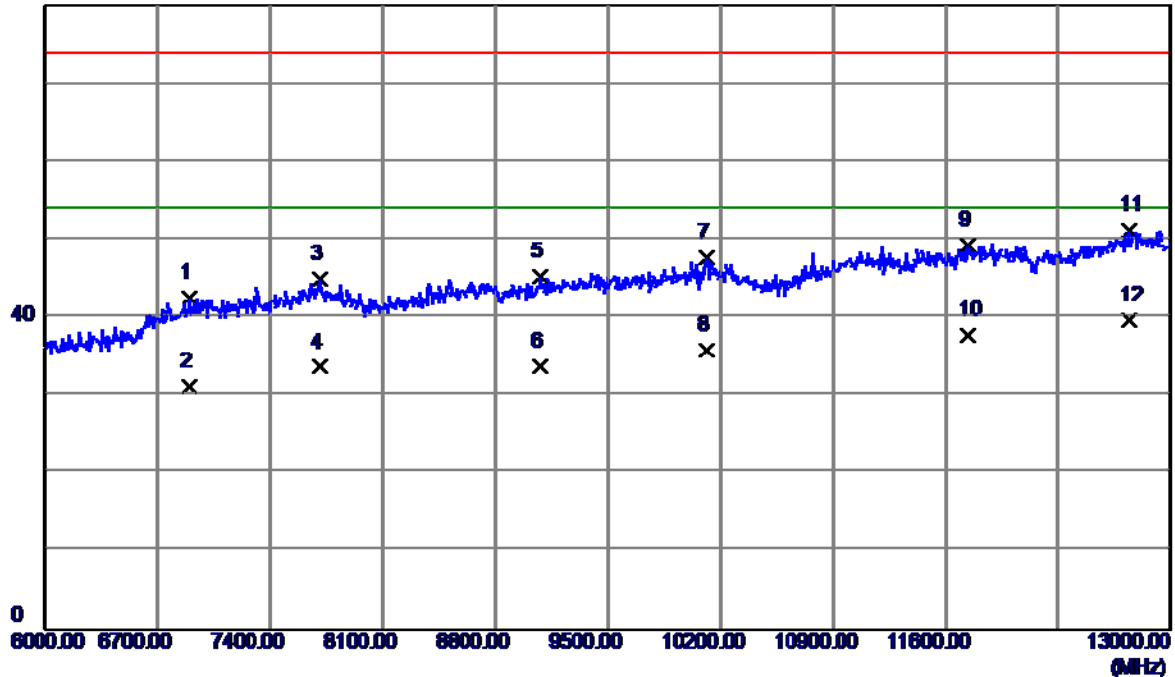

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector
1	6892.5000	31.51	11.04	42.55	74.00	-31.45	Peak
2	6892.5000	20.09	11.04	31.13	54.00	-22.87	AVG
3	7708.0000	32.30	12.59	44.89	74.00	-29.11	Peak
4	7708.0000	21.09	12.59	33.68	54.00	-20.32	AVG
5	9076.5000	30.73	14.53	45.26	74.00	-28.74	Peak
6	9076.5000	19.30	14.53	33.83	54.00	-20.17	AVG
7	10116.0000	31.81	15.82	47.63	74.00	-26.37	Peak
8	10116.0000	20.09	15.82	35.91	54.00	-18.09	AVG
9	11740.0000	31.50	17.72	49.22	74.00	-24.78	Peak
10	11740.0000	20.10	17.72	37.82	54.00	-16.18	AVG
11	12744.5000	32.82	18.44	51.26	74.00	-22.74	Peak
12 *	12744.5000	21.30	18.44	39.74	54.00	-14.26	AVG

EUT	Smart Band	Model Name	NYX-B10
Temperature	25°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz	Polarization	Vertical
Test Mode	Operating		
Note	LISHEN		
Test Engineer	Helen Wang		


80 dBuV/m

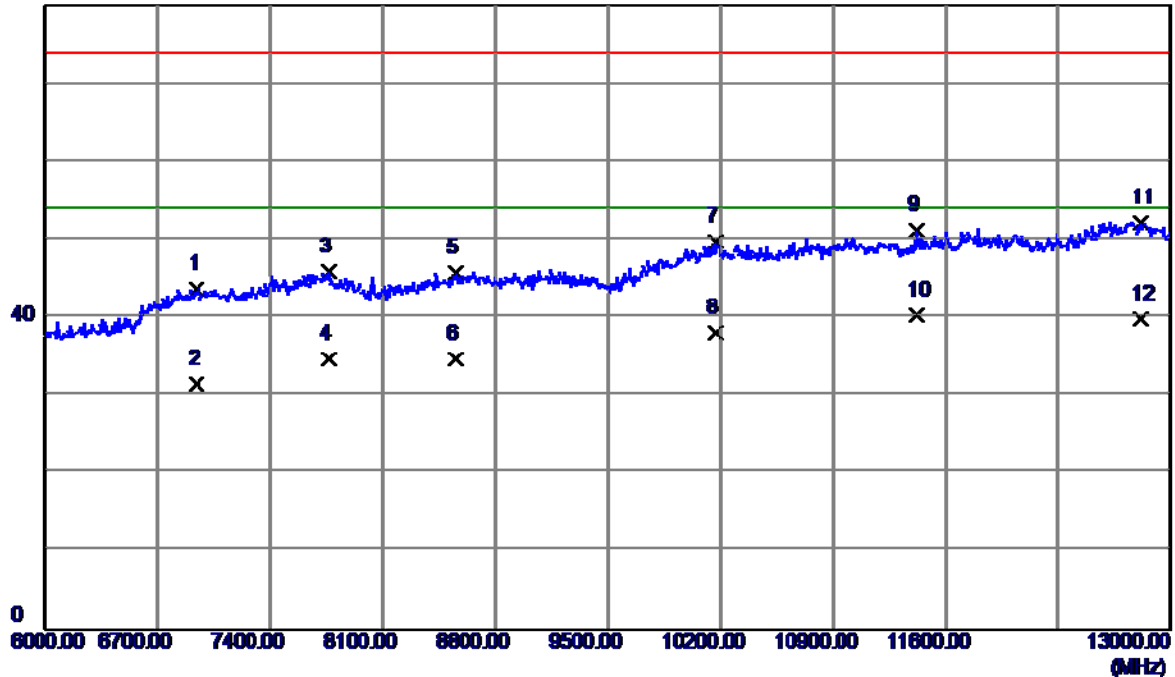

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector
1	6945.0000	32.38	11.23	43.61	74.00	-30.39	Peak
2	6945.0000	20.30	11.23	31.53	54.00	-22.47	AVG
3	7764.0000	33.39	12.57	45.96	74.00	-28.04	Peak
4	7764.0000	22.11	12.57	34.68	54.00	-19.32	AVG
5	8548.0000	32.29	13.49	45.78	74.00	-28.22	Peak
6	8548.0000	21.30	13.49	34.79	54.00	-19.21	AVG
7	10172.0000	33.84	15.94	49.78	74.00	-24.22	Peak
8	10172.0000	22.10	15.94	38.04	54.00	-15.96	AVG
9	11418.0000	33.43	17.79	51.22	74.00	-22.78	Peak
10 *	11418.0000	22.49	17.79	40.28	54.00	-13.72	AVG
11	12811.0000	33.66	18.54	52.20	74.00	-21.80	Peak
12	12811.0000	21.30	18.54	39.84	54.00	-14.16	AVG

EUT	Smart Band	Model Name	NYX-B10
Temperature	25°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz	Polarization	Horizontal
Test Mode	Operating		
Note	LISHEN		
Test Engineer	Helen Wang		


80 dBuV/m

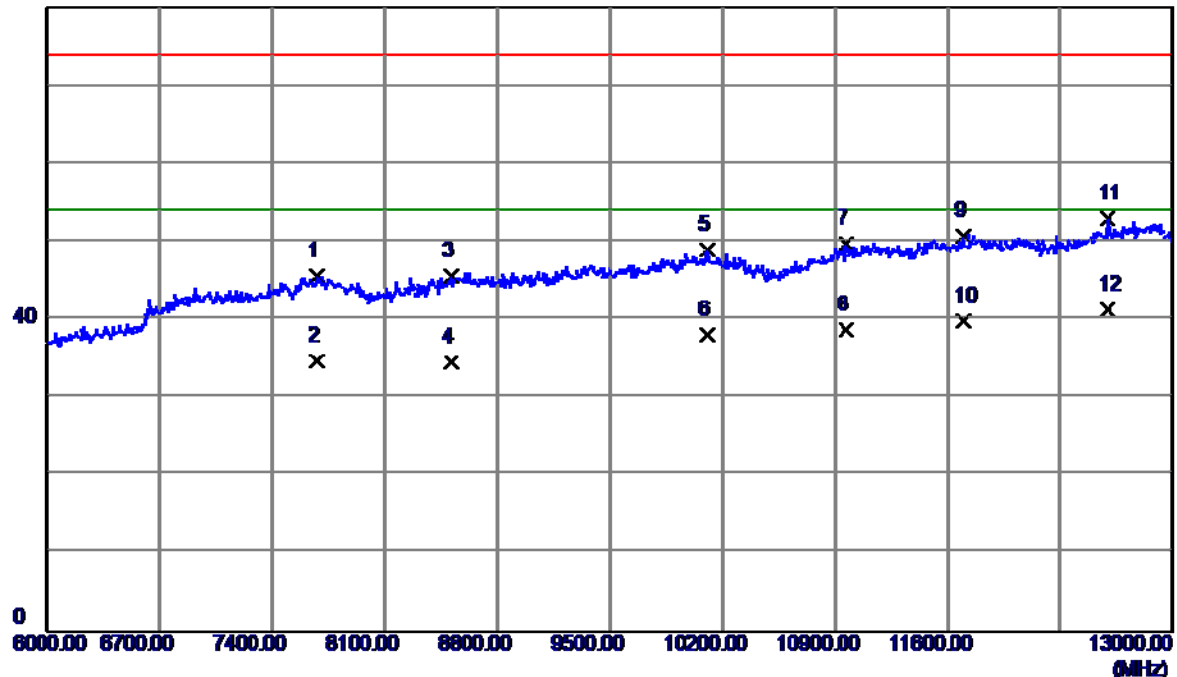

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector
1	7683.5000	33.05	12.60	45.65	74.00	-28.35	Peak
2	7683.5000	22.09	12.60	34.69	54.00	-19.31	AVG
3	8509.5000	32.25	13.40	45.65	74.00	-28.35	Peak
4	8509.5000	21.10	13.40	34.50	54.00	-19.50	AVG
5	10105.5000	33.11	15.79	48.90	74.00	-25.10	Peak
6	10105.5000	22.30	15.79	38.09	54.00	-15.91	AVG
7	10970.0000	32.68	17.15	49.83	74.00	-24.17	Peak
8	10970.0000	21.50	17.15	38.65	54.00	-15.35	AVG
9	11698.0000	32.91	17.75	50.66	74.00	-23.34	Peak
10	11698.0000	22.10	17.75	39.85	54.00	-14.15	AVG
11	12594.0000	34.72	18.23	52.95	74.00	-21.05	Peak
12 *	12594.0000	23.10	18.23	41.33	54.00	-12.67	AVG

EUT	Smart Band	Model Name	NYX-B10
Temperature	25°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz	Polarization	Vertical
Test Mode	Charging+Operating		
Note	COSLIGHT		
Test Engineer	Helen Wang		


80 dBuV/m

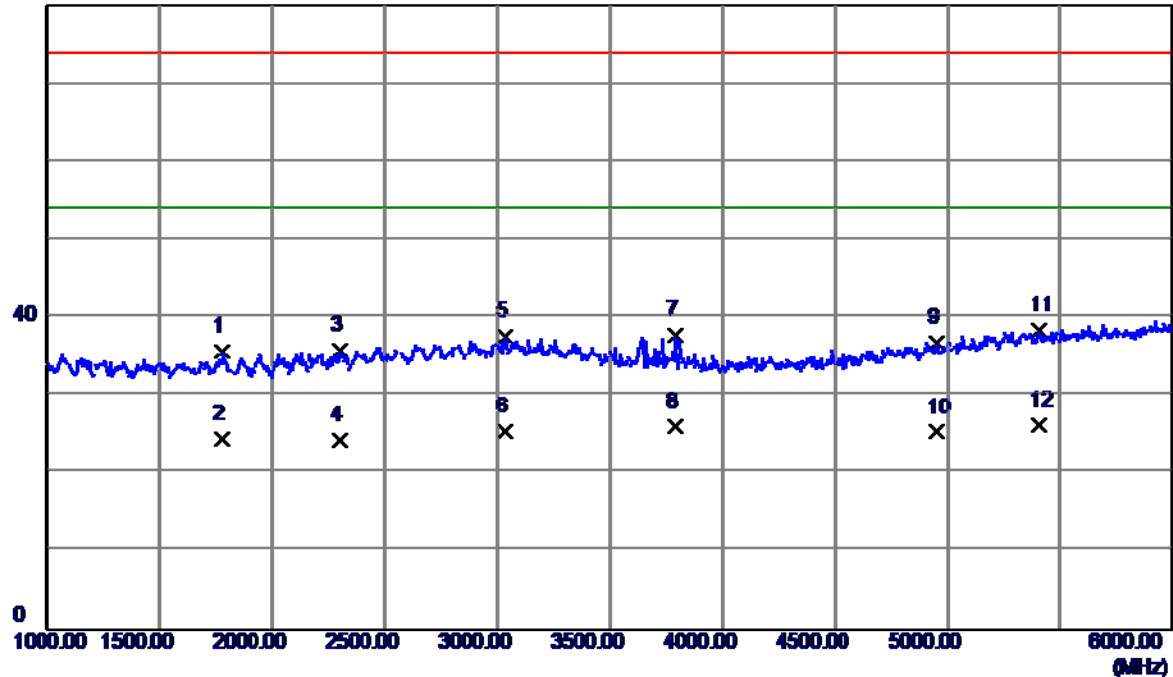

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector
1	1780.0000	39.26	-3.62	35.64	74.00	-38.36	Peak
2	1780.0000	28.10	-3.62	24.48	54.00	-29.52	AVG
3	2302.5000	36.77	-0.91	35.86	74.00	-38.14	Peak
4	2302.5000	25.30	-0.91	24.39	54.00	-29.61	AVG
5	3032.5000	35.20	2.39	37.59	74.00	-36.41	Peak
6	3032.5000	23.11	2.39	25.50	54.00	-28.50	AVG
7	3787.5000	35.17	2.52	37.69	74.00	-36.31	Peak
8	3787.5000	23.51	2.52	26.03	54.00	-27.97	AVG
9	4950.0000	30.72	6.07	36.79	74.00	-37.21	Peak
10	4950.0000	19.29	6.07	25.36	54.00	-28.64	AVG
11	5405.0000	30.72	7.69	38.41	74.00	-35.59	Peak
12 *	5405.0000	18.50	7.69	26.19	54.00	-27.81	AVG


EUT	Smart Band	Model Name	NYX-B10
Temperature	25°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz	Polarization	Horizontal
Test Mode	Charging+Operating		
Note	COSLIGHT		
Test Engineer	Helen Wang		

80 dBuV/m

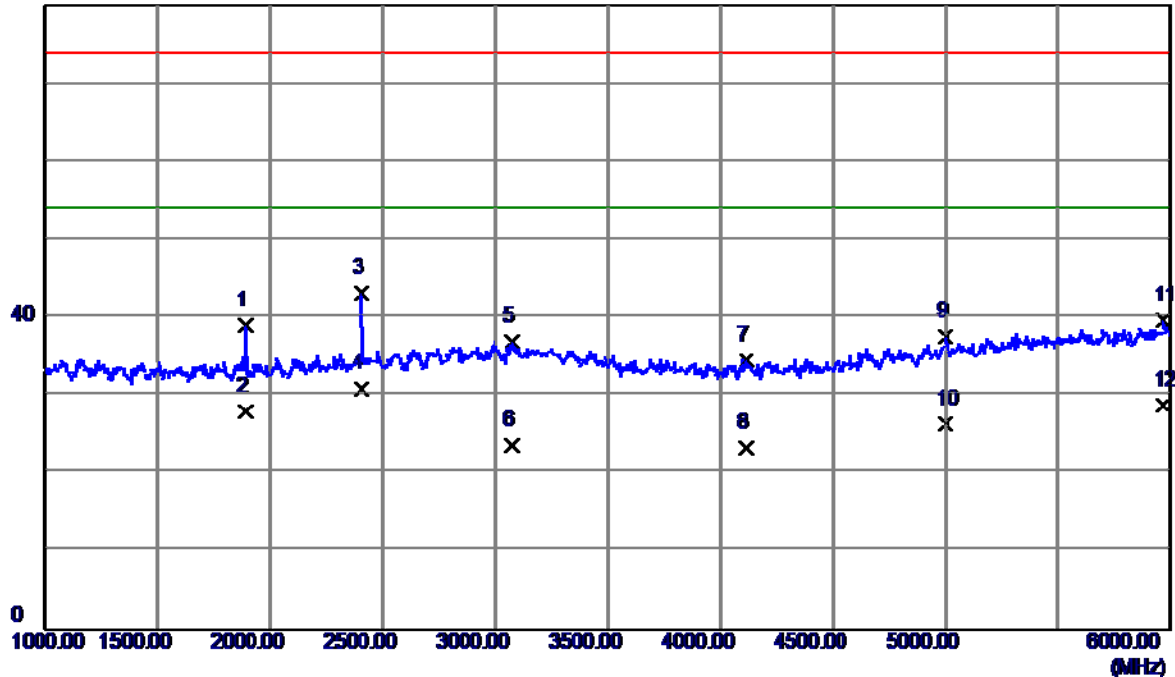

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector
1	1887.5000	42.14	-3.11	39.03	74.00	-34.97	Peak
2	1887.5000	31.10	-3.11	27.99	54.00	-26.01	AVG
3	2407.5000	43.61	-0.34	43.27	74.00	-30.73	Peak
4 *	2407.5000	31.30	-0.34	30.96	54.00	-23.04	AVG
5	3070.0000	34.56	2.38	36.94	74.00	-37.06	Peak
6	3070.0000	21.31	2.38	23.69	54.00	-30.31	AVG
7	4115.0000	31.60	2.99	34.59	74.00	-39.41	Peak
8	4115.0000	20.30	2.99	23.29	54.00	-30.71	AVG
9	5002.0000	31.30	6.32	37.62	74.00	-36.38	Peak
10	5002.5000	20.10	6.32	26.42	54.00	-27.58	AVG
11	5965.0000	31.29	8.43	39.72	74.00	-34.28	Peak
12	5965.0000	20.30	8.43	28.73	54.00	-25.27	AVG


EUT	Smart Band	Model Name	NYX-B10
Temperature	25°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz	Polarization	Vertical
Test Mode	Charging+Operating		
Note	LISHEN		
Test Engineer	Helen Wang		

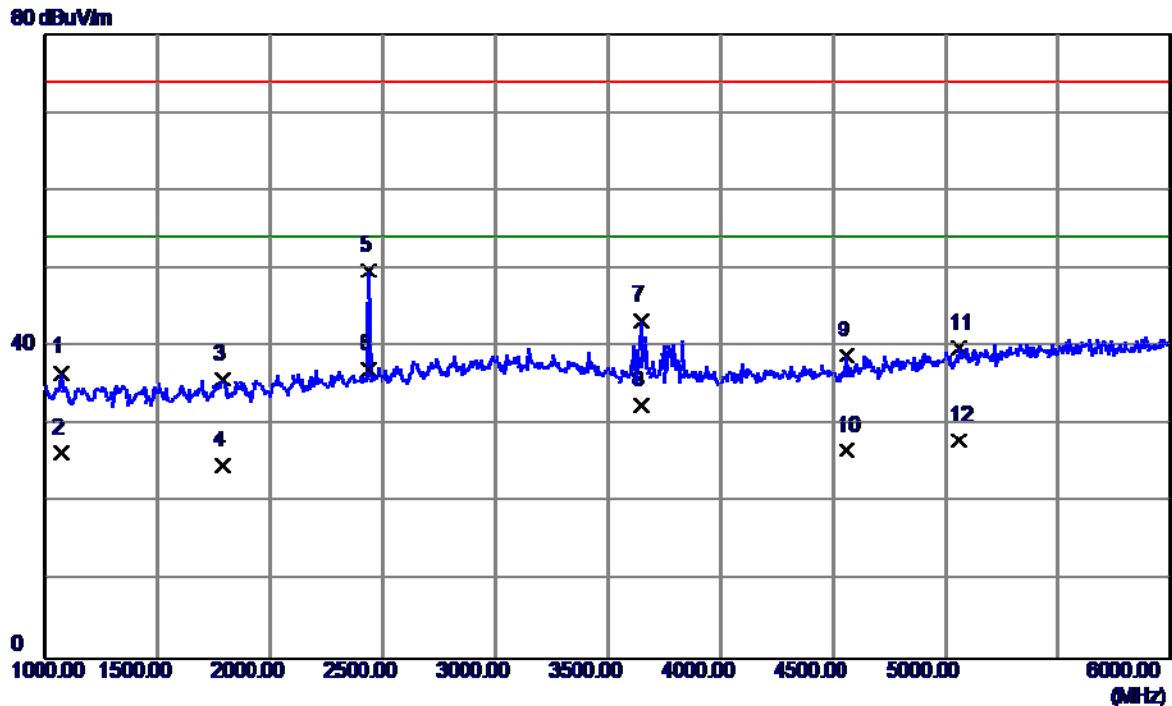

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector
1	1072.5000	43.19	-6.47	36.72	74.00	-37.28	Peak
2	1072.5000	32.89	-6.47	26.42	54.00	-27.58	AVG
3	1790.0000	39.44	-3.57	35.87	74.00	-38.13	Peak
4	1790.0000	28.40	-3.57	24.83	54.00	-29.17	AVG
5	2440.0000	49.87	-0.16	49.71	74.00	-24.29	Peak
6 *	2440.0000	37.30	-0.16	37.14	54.00	-16.86	AVG
7	3650.0000	40.91	2.39	43.30	74.00	-30.70	Peak
8	3650.0000	30.10	2.39	32.49	54.00	-21.51	AVG
9	4562.5000	34.65	4.18	38.83	74.00	-35.17	Peak
10	4562.5000	22.60	4.18	26.78	54.00	-27.22	AVG
11	5062.5000	33.36	6.52	39.88	74.00	-34.12	Peak
12	5062.5000	21.50	6.52	28.02	54.00	-25.98	AVG

EUT	Smart Band	Model Name	NYX-B10
Temperature	25°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz	Polarization	Horizontal
Test Mode	Charging+Operating		
Note	LISHEN		
Test Engineer	Helen Wang		


80 dBuV/m

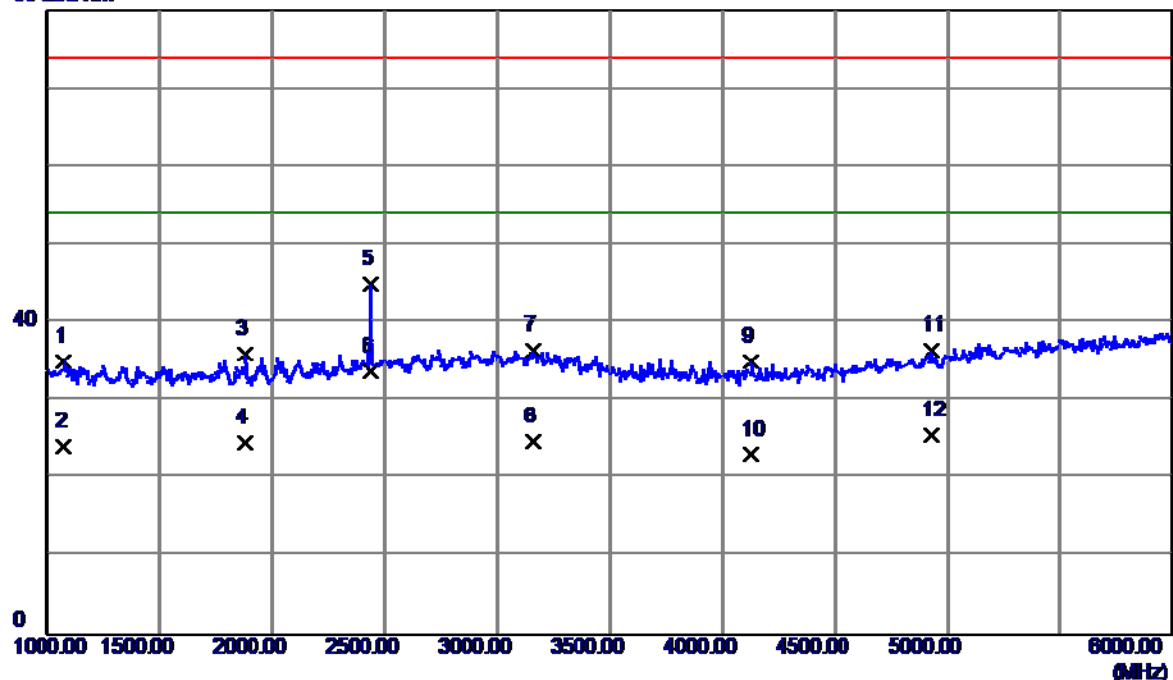

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector
1	1075.0000	41.52	-6.46	35.06	74.00	-38.94	Peak
2	1075.0000	30.69	-6.46	24.23	54.00	-29.77	AVG
3	1880.0000	39.09	-3.14	35.95	74.00	-38.05	Peak
4	1880.0000	27.80	-3.14	24.66	54.00	-29.34	AVG
5	2437.5000	45.15	-0.17	44.98	74.00	-29.02	Peak
6 *	2437.5000	33.90	-0.17	33.73	54.00	-20.27	AVG
7	3162.5000	34.16	2.35	36.51	74.00	-37.49	Peak
8	3162.5000	22.51	2.35	24.86	54.00	-29.14	AVG
9	4130.0000	31.96	3.02	34.98	74.00	-39.02	Peak
10	4130.0000	20.10	3.02	23.12	54.00	-30.88	AVG
11	4927.5000	30.52	5.96	36.48	74.00	-37.52	Peak
12	4927.5000	19.60	5.96	25.56	54.00	-28.44	AVG

EUT	Smart Band	Model Name	NYX-B10
Temperature	25°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz	Polarization	Vertical
Test Mode	Charging+Operating		
Note	COSLIGHT		
Test Engineer	Helen Wang		


80 dBuV/m

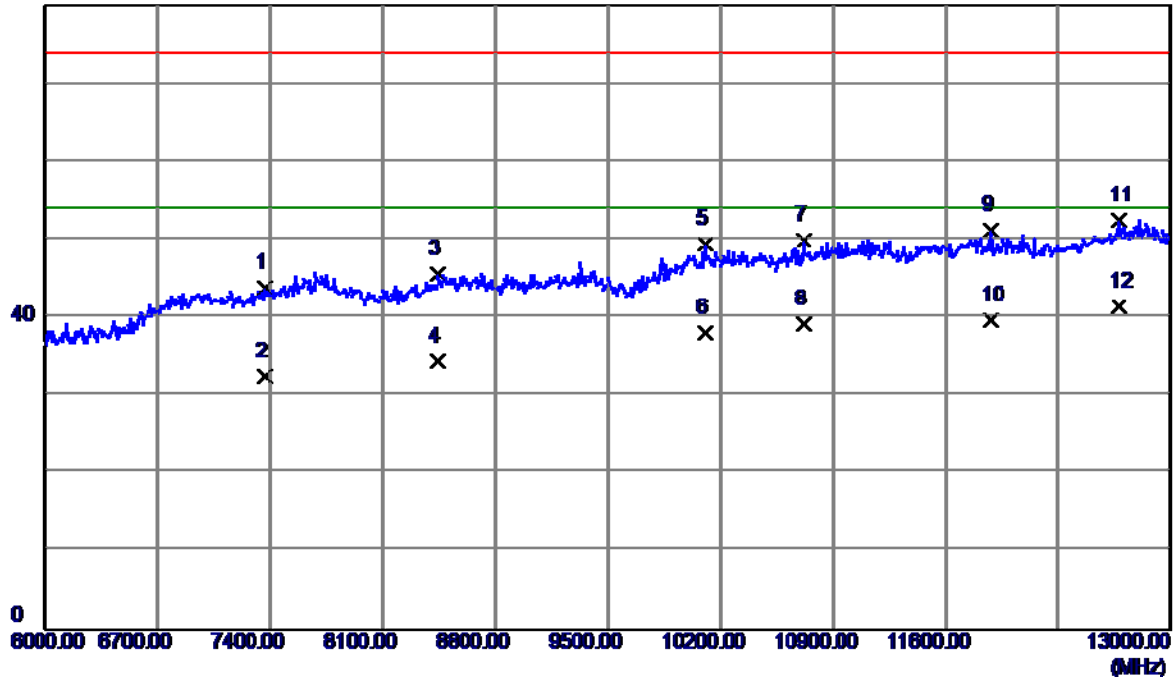

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector
1	7372.0000	31.51	12.33	43.84	74.00	-30.16	Peak
2	7372.0000	20.10	12.33	32.43	54.00	-21.57	AVG
3	8443.0000	32.39	13.28	45.67	74.00	-28.33	Peak
4	8443.0000	21.10	13.28	34.38	54.00	-19.62	AVG
5	10105.5000	33.70	15.79	49.49	74.00	-24.51	Peak
6	10105.5000	22.30	15.79	38.09	54.00	-15.91	AVG
7	10721.5000	33.03	16.90	49.93	74.00	-24.07	Peak
8	10721.5000	22.24	16.90	39.14	54.00	-14.86	AVG
9	11883.5000	33.57	17.60	51.17	74.00	-22.83	Peak
10	11883.5000	22.10	17.60	39.70	54.00	-14.30	AVG
11	12678.0000	34.15	18.35	52.50	74.00	-21.50	Peak
12 *	12678.0000	23.10	18.35	41.45	54.00	-12.55	AVG

EUT	Smart Band	Model Name	NYX-B10
Temperature	25°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz	Polarization	Horizontal
Test Mode	Charging+Operating		
Note	COSLIGHT		
Test Engineer	Helen Wang		


80 dBuV/m

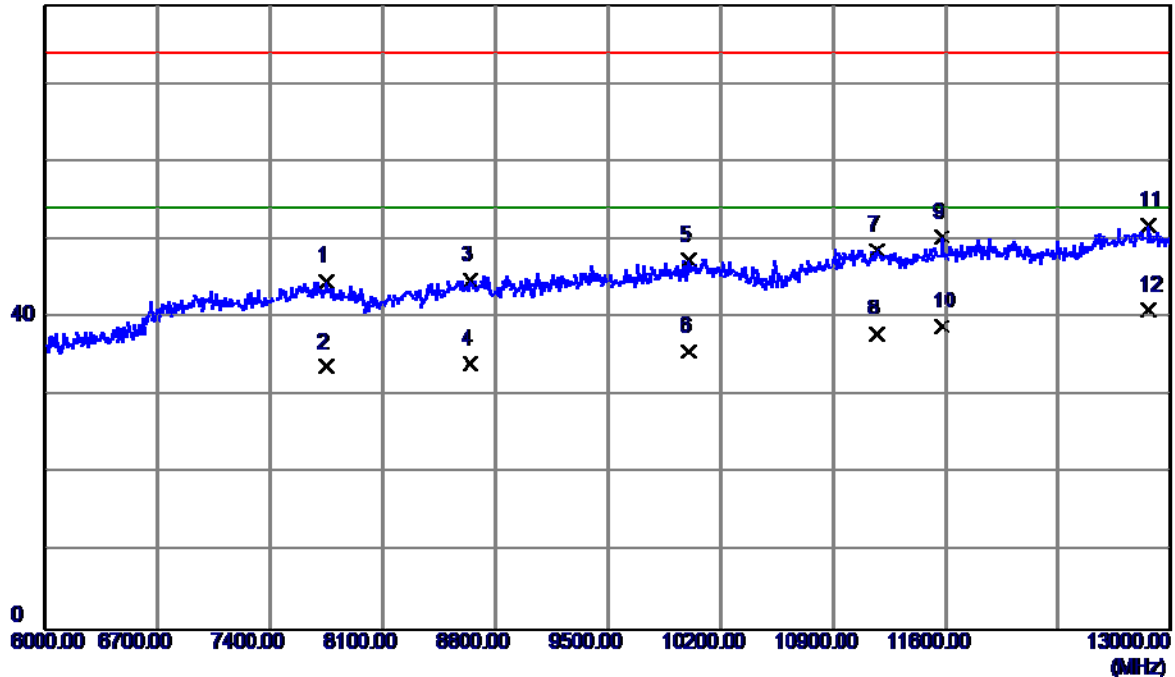

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector
1	7746.5000	32.12	12.58	44.70	74.00	-29.30	Peak
2	7746.5000	21.10	12.58	33.68	54.00	-20.32	AVG
3	8646.0000	31.15	13.72	44.87	74.00	-29.13	Peak
4	8646.0000	20.30	13.72	34.02	54.00	-19.98	AVG
5	10004.0000	31.83	15.57	47.40	74.00	-26.60	Peak
6	10004.0000	20.09	15.57	35.66	54.00	-18.34	AVG
7	11169.5000	31.28	17.43	48.71	74.00	-25.29	Peak
8	11169.5000	20.49	17.43	37.92	54.00	-16.08	AVG
9	11575.5000	32.47	17.85	50.32	74.00	-23.68	Peak
10	11575.5000	21.10	17.85	38.95	54.00	-15.05	AVG
11	12856.5000	33.26	18.60	51.86	74.00	-22.14	Peak
12 *	12856.5000	22.30	18.60	40.90	54.00	-13.10	AVG

EUT	Smart Band	Model Name	NYX-B10
Temperature	25°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz	Polarization	Vertical
Test Mode	Charging+Operating		
Note	LISHEN		
Test Engineer	Helen Wang		


80 dBuV/m

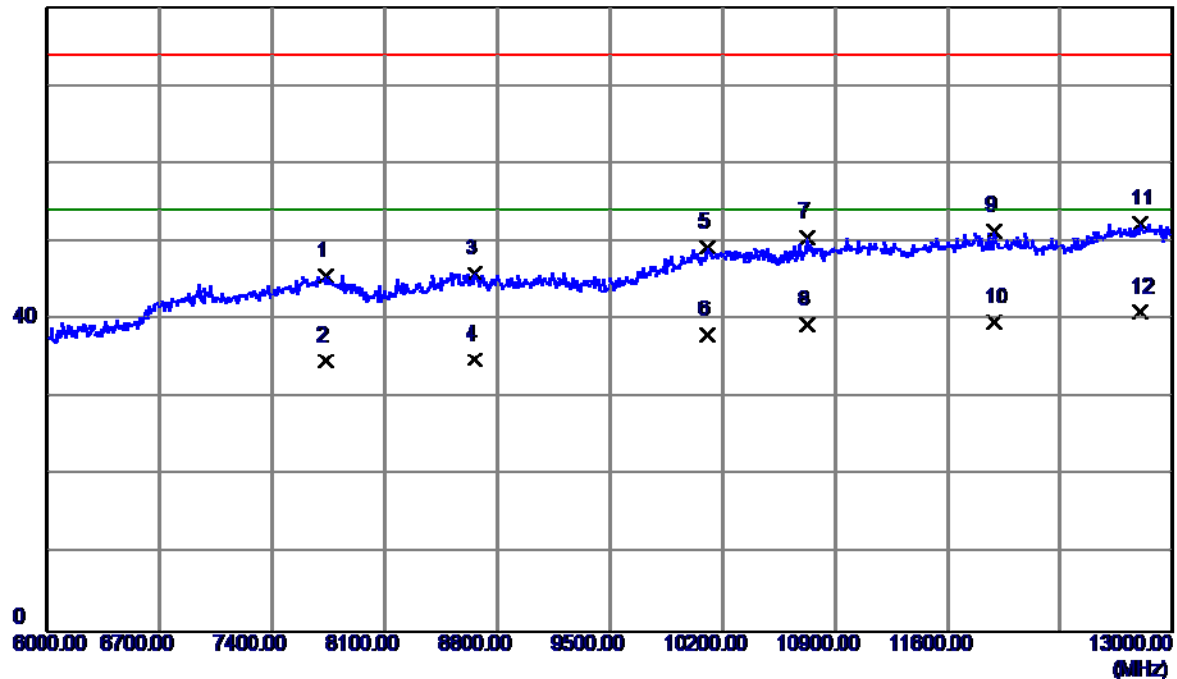

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector
1	7732.5000	33.06	12.58	45.64	74.00	-28.36	Peak
2	7732.5000	22.10	12.58	34.68	54.00	-19.32	AVG
3	8660.0000	32.20	13.75	45.95	74.00	-28.05	Peak
4	8660.0000	21.10	13.75	34.85	54.00	-19.15	AVG
5	10109.0000	33.55	15.80	49.35	74.00	-24.65	Peak
6	10109.0000	22.31	15.80	38.11	54.00	-15.89	AVG
7	10732.0000	33.60	16.91	50.51	74.00	-23.49	Peak
8	10732.0000	22.50	16.91	39.41	54.00	-14.59	AVG
9	11890.5000	33.74	17.60	51.34	74.00	-22.66	Peak
10	11890.5000	22.10	17.60	39.70	54.00	-14.30	AVG
11	12800.5000	33.82	18.52	52.34	74.00	-21.66	Peak
12 *	12800.5000	22.51	18.52	41.03	54.00	-12.97	AVG

EUT	Smart Band	Model Name	NYX-B10
Temperature	25°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz	Polarization	Horizontal
Test Mode	Charging+Operating		
Note	LISHEN		
Test Engineer	Helen Wang		

80 dBuV/m

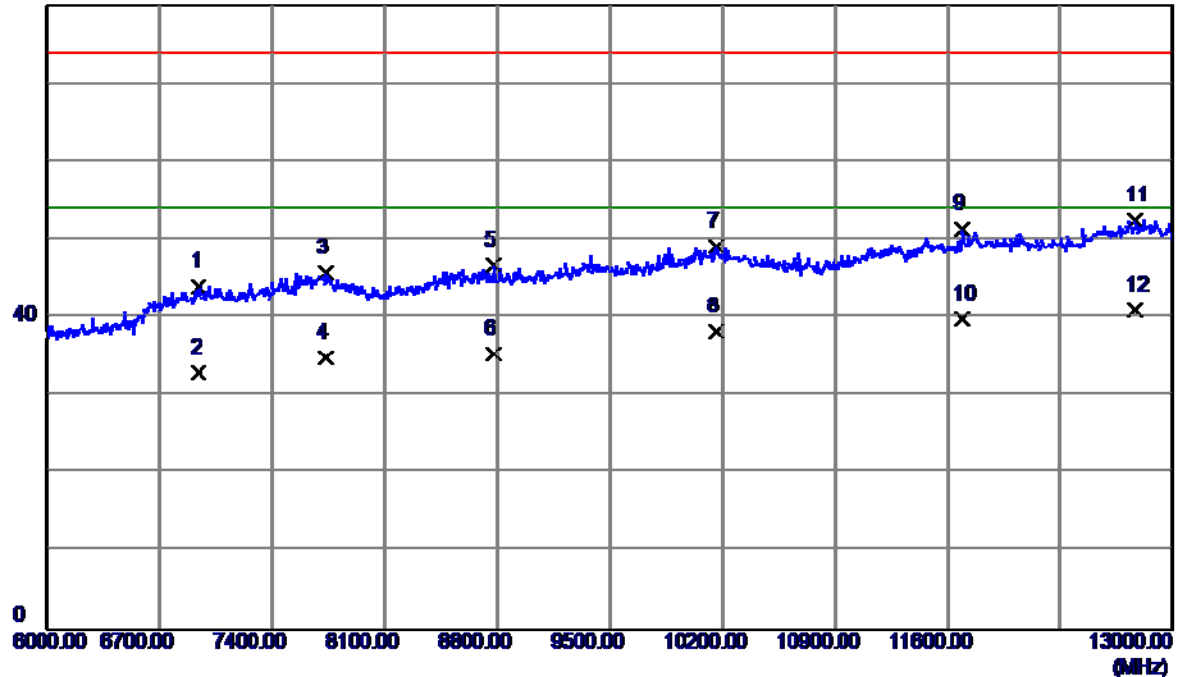

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector
1	6945.0000	32.84	11.23	44.07	74.00	-29.93	Peak
2	6945.0000	21.80	11.23	33.03	54.00	-20.97	AVG
3	7732.5000	33.21	12.58	45.79	74.00	-28.21	Peak
4	7732.5000	22.30	12.58	34.88	54.00	-19.12	AVG
5	8779.0000	32.65	14.02	46.67	74.00	-27.33	Peak
6	8779.0000	21.31	14.02	35.33	54.00	-18.67	AVG
7	10158.0000	33.15	15.91	49.06	74.00	-24.94	Peak
8	10158.0000	22.30	15.91	38.21	54.00	-15.79	AVG
9	11691.0000	33.63	17.75	51.38	74.00	-22.62	Peak
10	11691.0000	22.11	17.75	39.86	54.00	-14.14	AVG
11	12769.0000	33.99	18.48	52.47	74.00	-21.53	Peak
12 *	12769.0000	22.50	18.48	40.98	54.00	-13.02	AVG