



Appendix for test report

1Appendix_A: Effective (Isotropic) Radiated Power Output Data

Part I - Test Results

Test Band	Test Mode	Test Channel	Conducted Power [dBm]	ERP [dBm]	Limit [dBm]	Verdict
GSM850	GSM/TM1	LCH	31.52	31.96	38.5	PASS
		MCH	31.64	32.08	38.5	PASS
		HCH	31.74	32.18	38.5	PASS
	GSM/TM2	LCH	25.62	26.06	38.5	PASS
		MCH	25.7	26.14	38.5	PASS
		HCH	25.73	26.17	38.5	PASS
GSM1900	GSM/TM1	LCH	28.7	29.49	33	PASS
		MCH	28.64	29.43	33	PASS
		HCH	28.56	29.35	33	PASS
	GSM/TM2	LCH	24.27	25.06	33	PASS
		MCH	24.24	25.03	33	PASS
		HCH	24.15	24.94	33	PASS

Note1:

a, For getting the ERP (Efficient Radiated Power) or EIRP (Efficient Isotropic Radiated Power) in substitution method, the following formula should be taken to calculate it,

$$\text{ERP [dBm]} = \text{SGP [dBm]} - \text{Cable Loss [dB]} + \text{Gain [dBd]}$$

$$\text{EIRP [dBm]} = \text{SGP [dBm]} - \text{Cable Loss [dB]} + \text{Gain [dBi]}$$

b, SGP=Signal Generator Level

Note2: RBW > emission bandwidth, VBW > 3 x RBW.

Detector: RMS

2Appendix_B: Peak-to-Average Ratio

Part I - Test Results

Test Band	Test Mode	Test Channel	Measured[dB]	Limit [dB]	Verdict
GSM1900	GSM/TM1	LCH	0.12	13	PASS
		MCH	0.12	13	PASS
		HCH	0.13	13	PASS
	GSM/TM2	LCH	3.12	13	PASS
		MCH	3.2	13	PASS
		HCH	3.18	13	PASS

3Appendix_C: Modulation Characteristics


Part I - Test Plots

3.1 For GSM

3.1.1 Test Band = GSM850


3.1.1.1 Test Mode = GSM/TM1

3.1.1.1.1 Test Channel = MCH

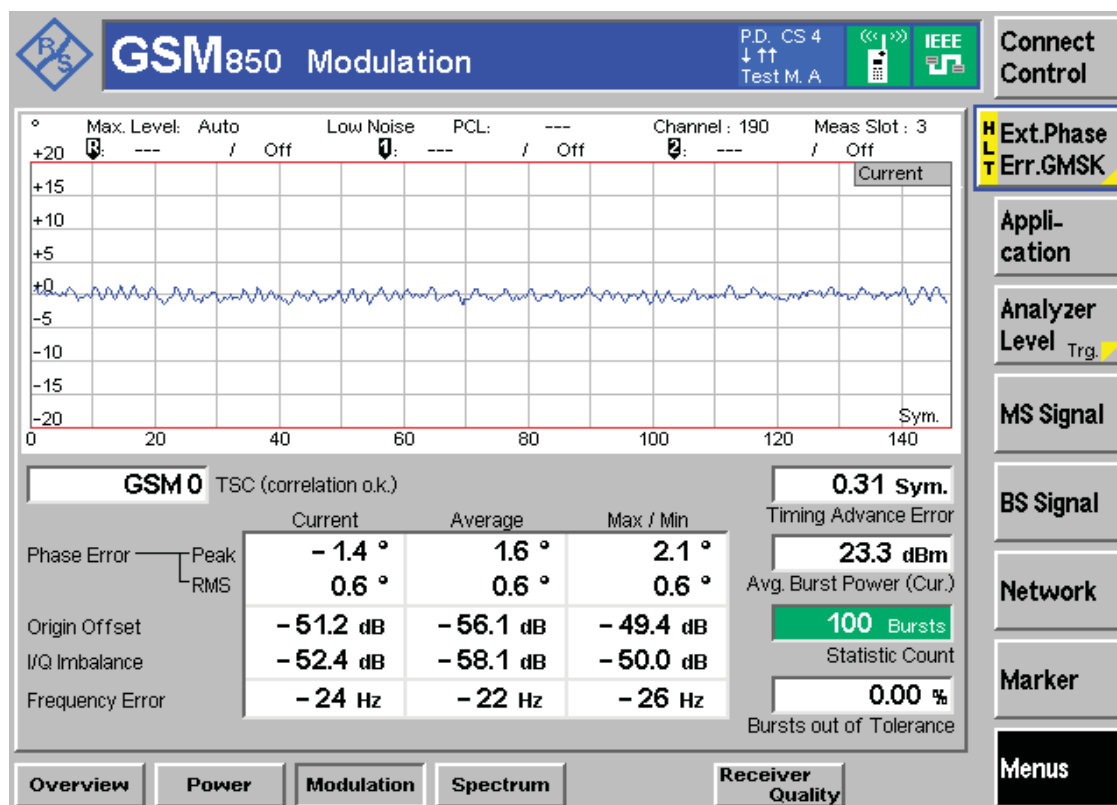

3.1.1.2 Test Mode = GSM/TM2


3.1.1.2.1 Test Channel = MCH

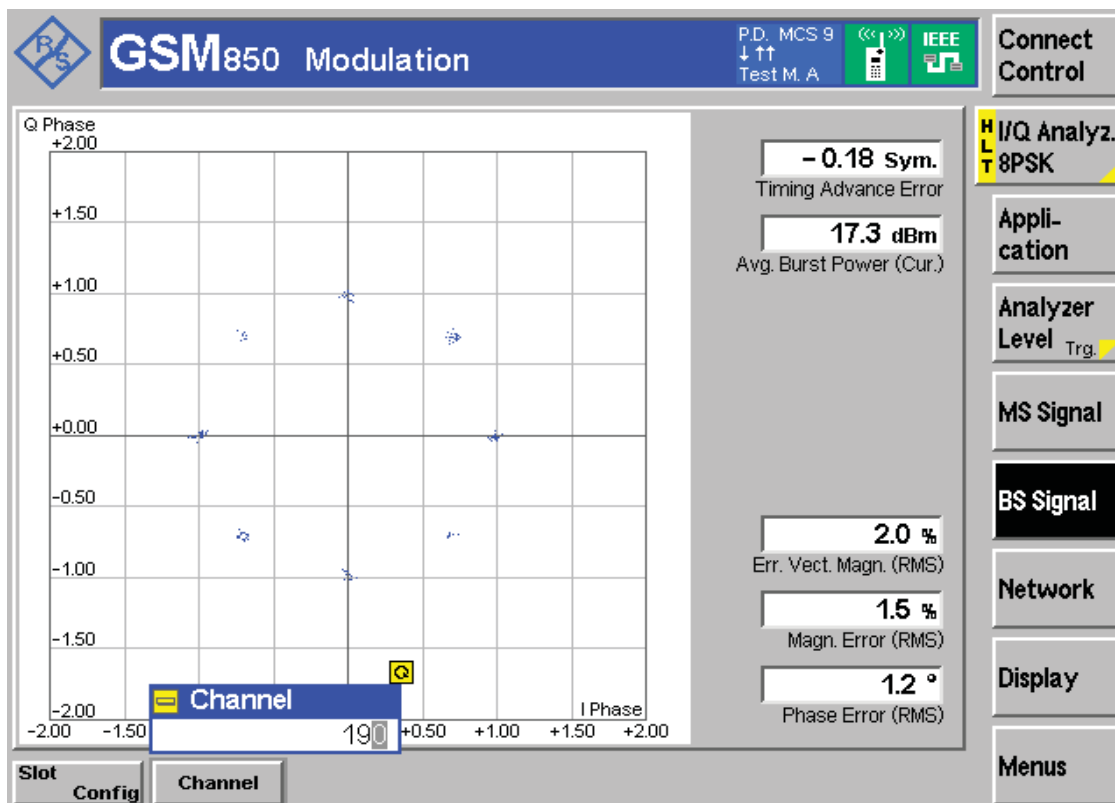

3.1.2 Test Band = GSM1900


3.1.2.1 Test Mode = GSM/TM1

3.1.2.1.1 Test Channel = MCH

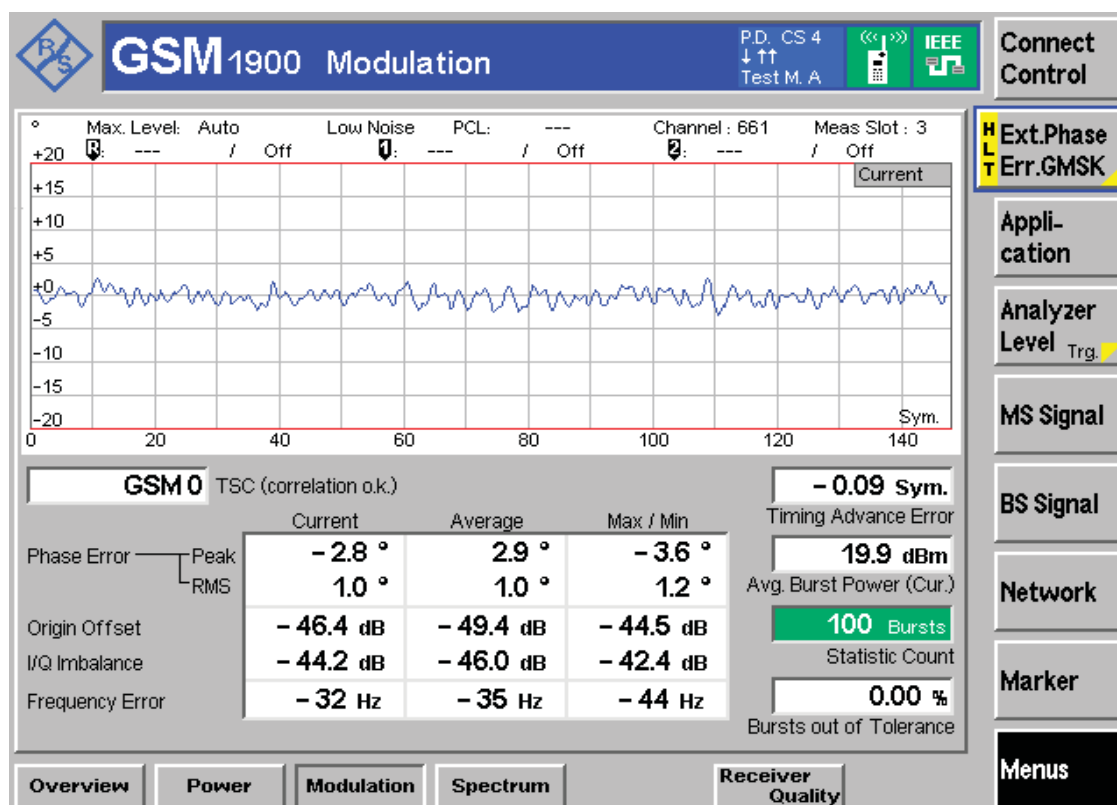

3.1.2.2 Test Mode = GSM/TM2

3.1.2.2.1 Test Channel = MCH

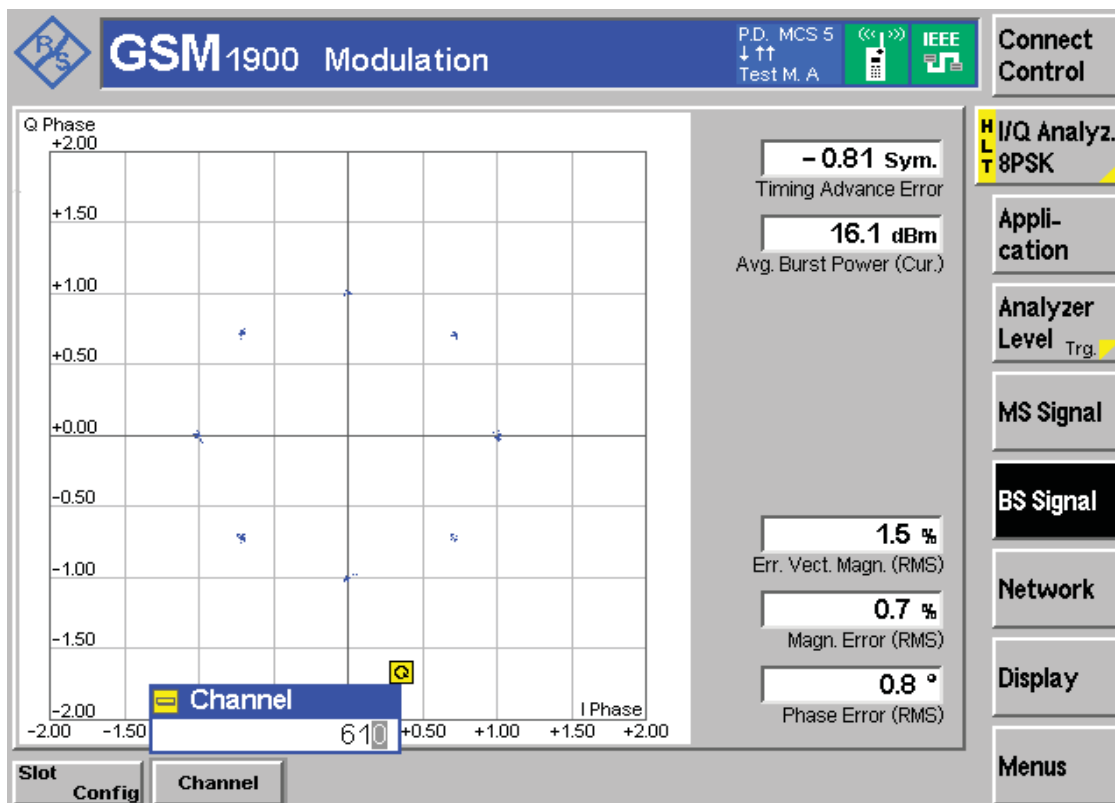

4Appendix_D: Bandwidth

Part I - Test Results

Test Band	Test Mode	Test Channel	Occupied Bandwidth [kHz]	Emission Bandwidth [kHz]	Verdict
GSM850	GSM/TM1	LCH	243.57	312.26	Pass
		MCH	244.28	320.23	Pass
		HCH	242.59	309.10	Pass
	GSM/TM2	LCH	247.35	308.99	Pass
		MCH	239.72	309.80	Pass
		HCH	239.07	309.27	Pass
GSM1900	GSM/TM1	LCH	244.62	306.47	Pass
		MCH	241.87	308.93	Pass
		HCH	245.30	316.13	Pass
	GSM/TM2	LCH	245.09	320.97	Pass
		MCH	243.98	314.23	Pass
		HCH	247.16	316.86	Pass

Part II - Test Plots

4.1 For GSM

4.1.1 Test Band = GSM850

4.1.1.1 Test Mode = GSM/TM1

4.1.1.1.1 Test Channel = LCH



4.1.1.1.2 Test Channel = MCH



4.1.1.1.3 Test Channel = HCH



4.1.1.2 Test Mode = GSM/TM2


4.1.1.2.1 Test Channel = LCH



4.1.1.2.2 Test Channel = MCH




4.1.1.2.3 Test Channel = HCH

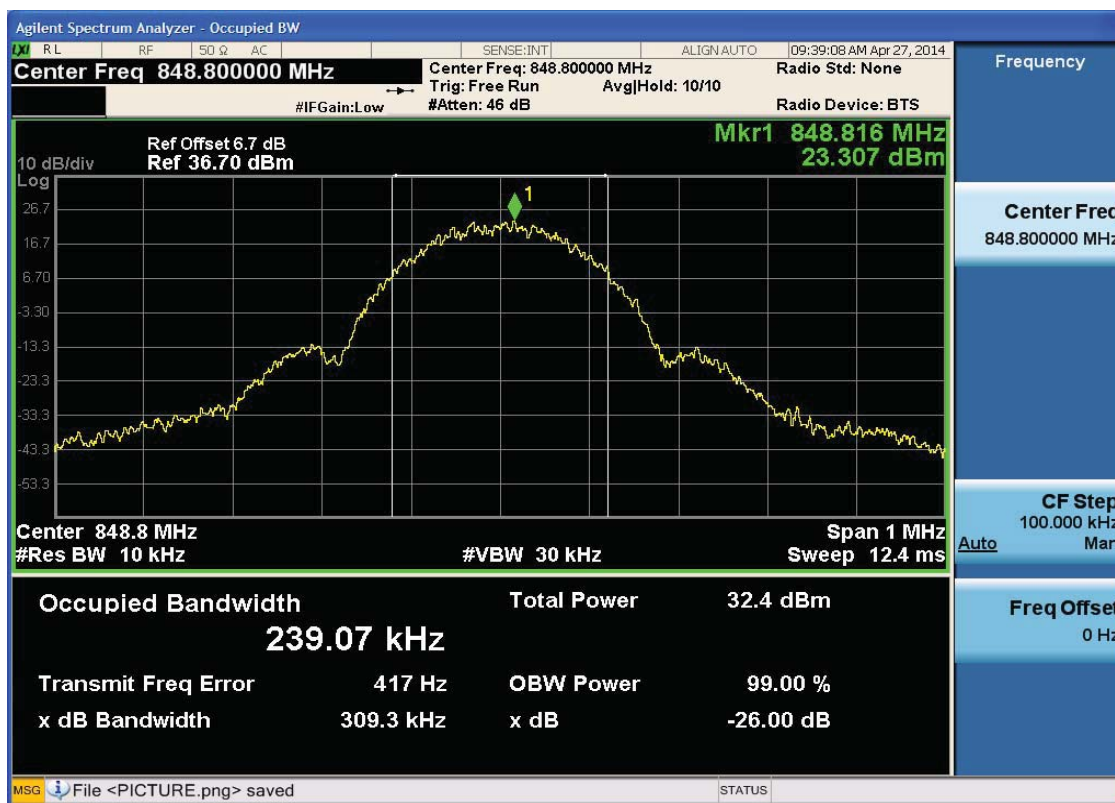

4.1.2 Test Band = GSM1900

4.1.2.1 Test Mode = GSM/TM1

4.1.2.1.1 Test Channel = LCH

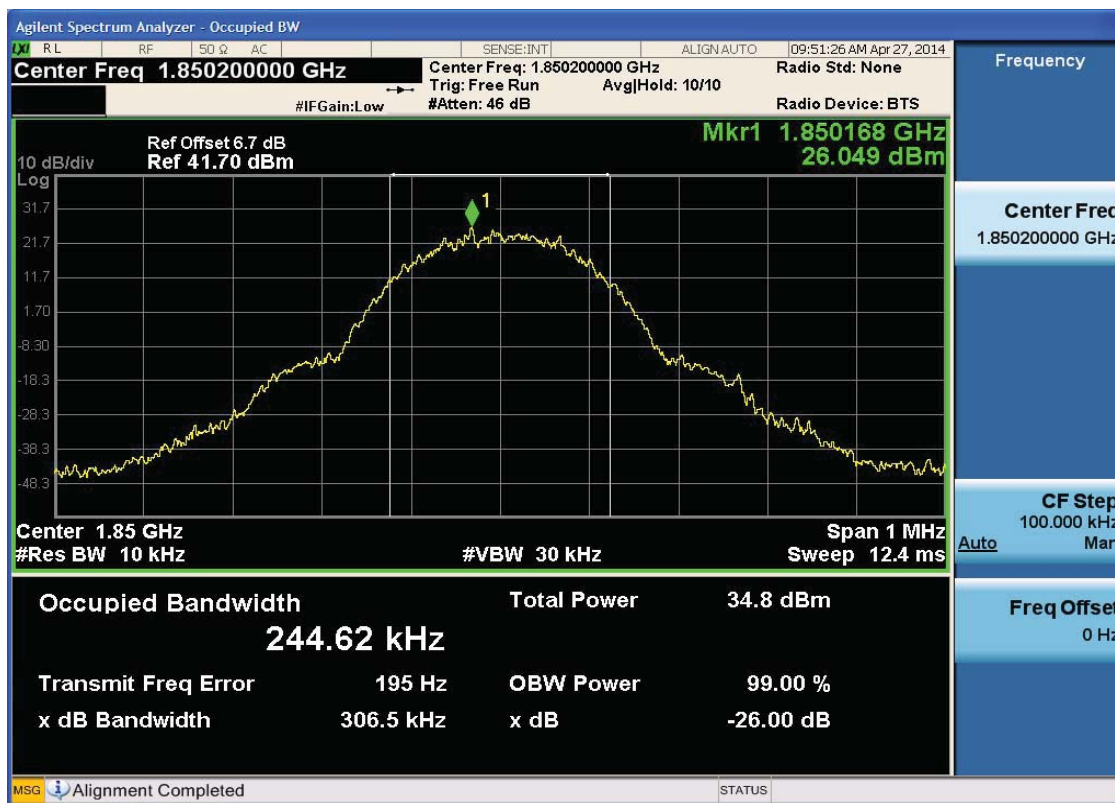

4.1.2.1.2 Test Channel = MCH



4.1.2.1.3 Test Channel = HCH




4.1.2.2 Test Mode = GSM/TM2

4.1.2.2.1 Test Channel = LCH



4.1.2.2.2 Test Channel = MCH

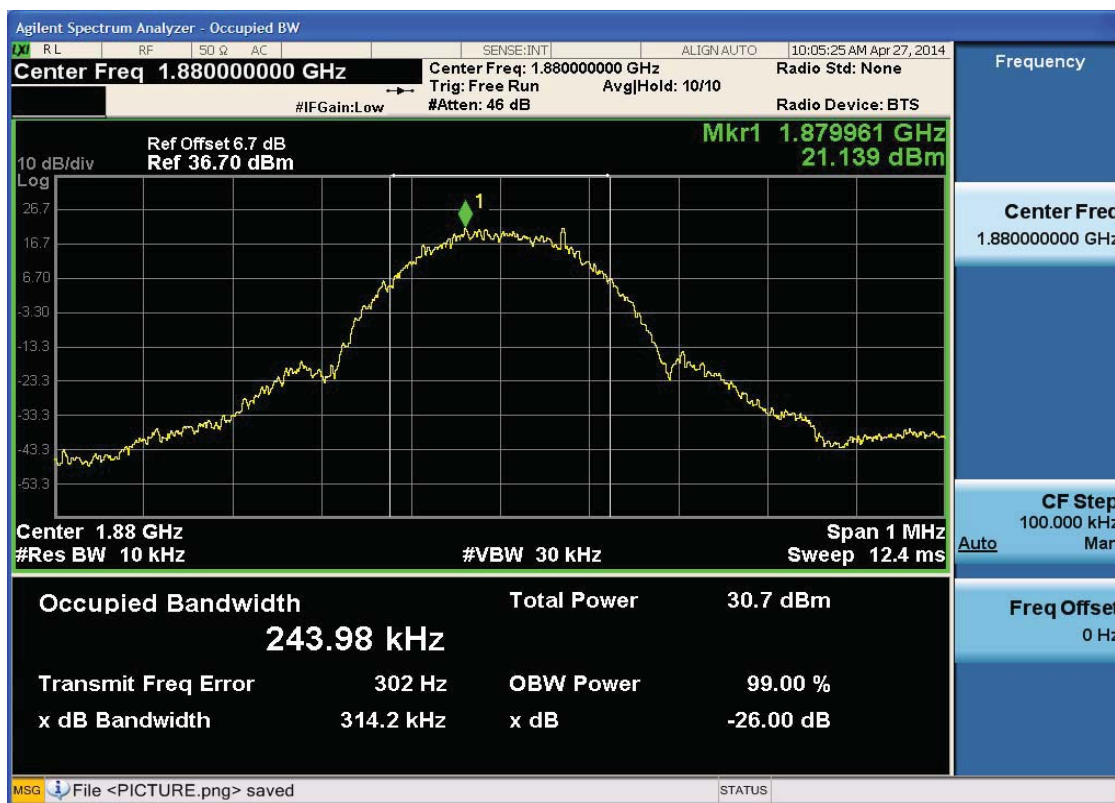

4.1.2.2.3 Test Channel = HCH



5Appendix_E: Band Edges Compliance


Part I - Test Plots

5.1 For GSM

5.1.1 Test Band = GSM850

5.1.1.1 Test Mode = GSM/TM1

5.1.1.1.1 Test Channel = LCH

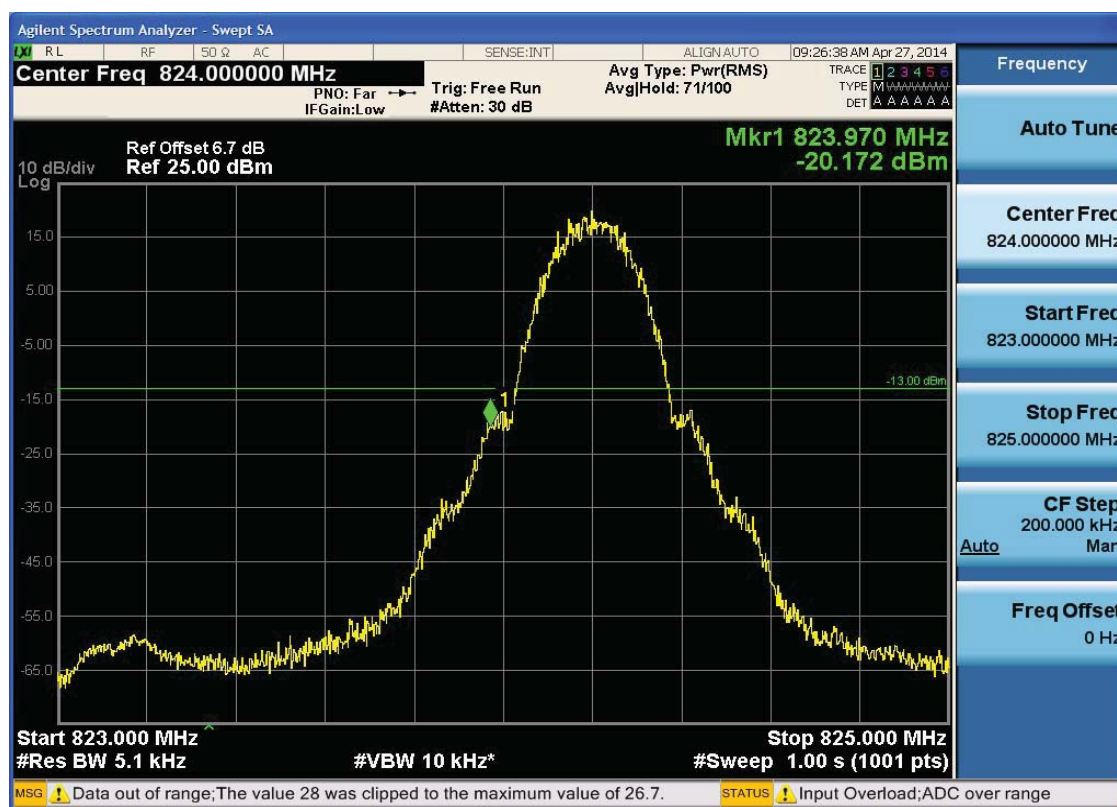

5.1.1.1.2 Test Channel = HCH



5.1.1.2 Test Mode = GSM/TM2


5.1.1.2.1 Test Channel = LCH



5.1.1.2.2 Test Channel = HCH



5.1.2.1.2 Test Channel = HCH

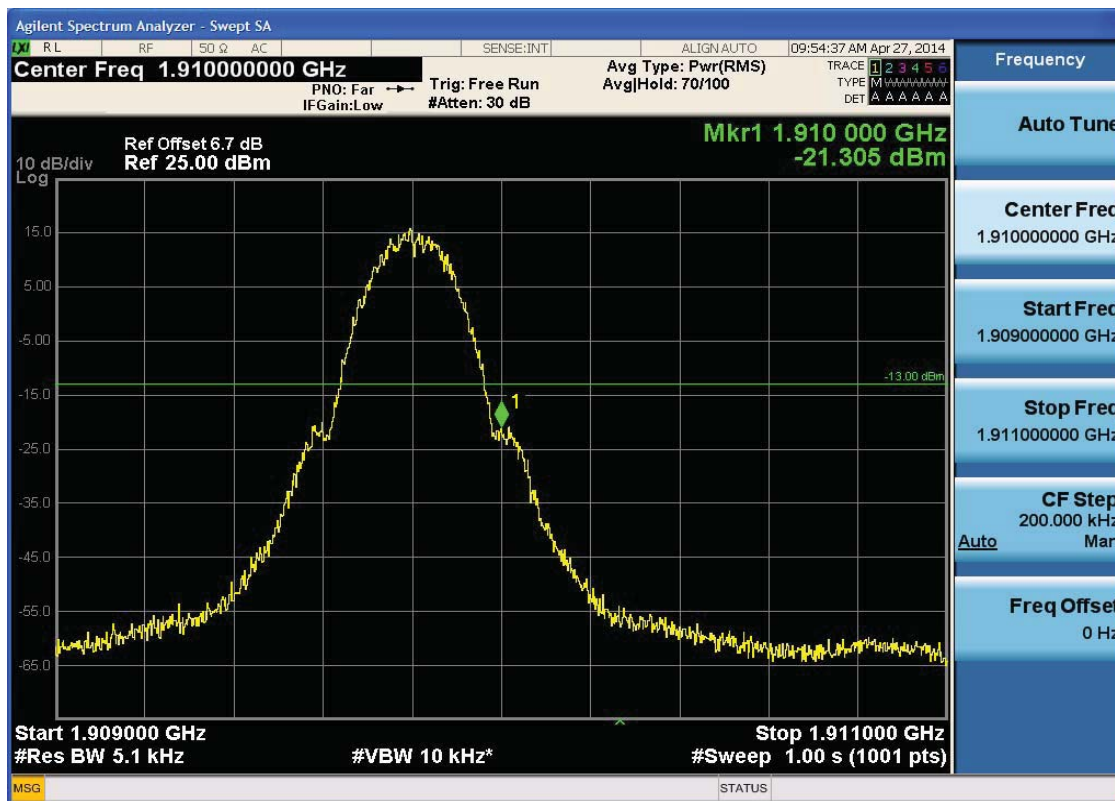

5.1.2.2 Test Mode = GSM/TM2

5.1.2.2.1 Test Channel = LCH



5.1.2.2.2 Test Channel = HCH



6Appendix_F: Spurious Emission at Antenna Terminal

NOTE: For the averaged unwanted emissions measurements, the measurement points in each sweep is greater than twice the Span/RBW in order to ensure bin-to-bin spacing of $< RBW/2$ so that narrowband signals are not lost between frequency bins. As to the present test item, the "Measurement Points = $k * (Span / RBW)$ " with k between 4 and 5, which results in an acceptable level error of less than 0.5 dB.


Part I - Test Plots


6.1 For GSM


6.1.1 Test Band = GSM850


6.1.1.1 Test Mode = GSM/TM1

6.1.1.1.1 Test Channel = LCH

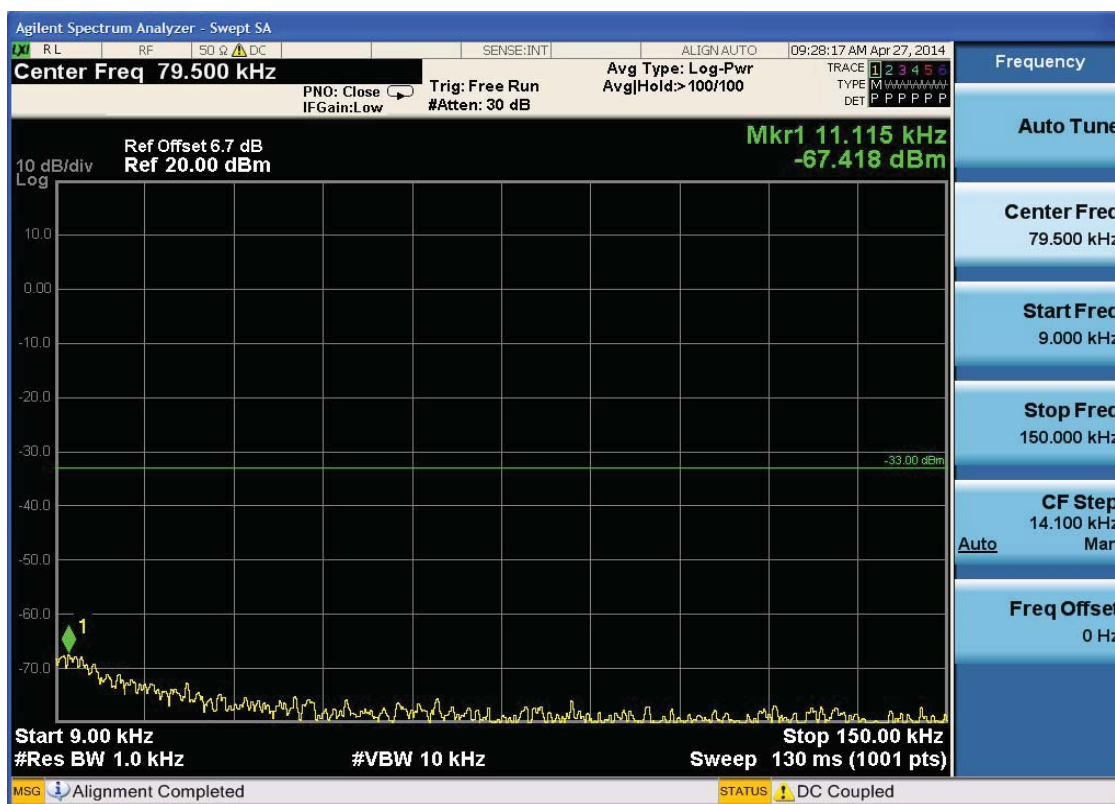


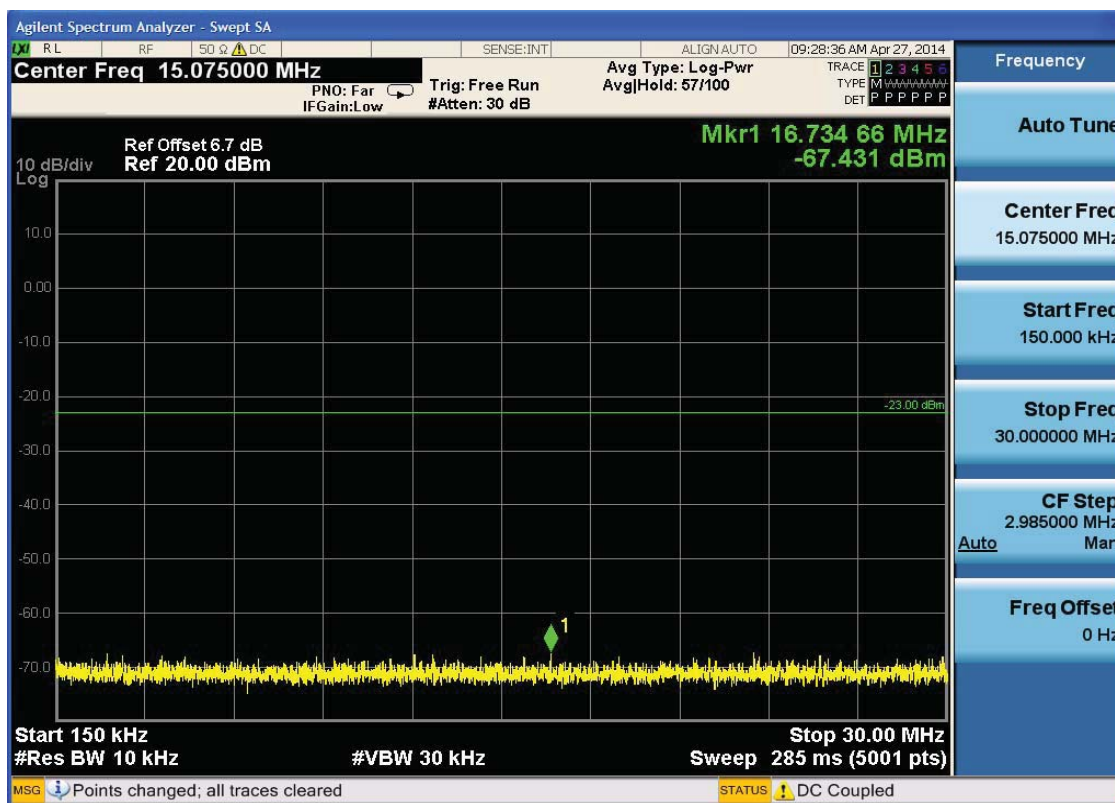




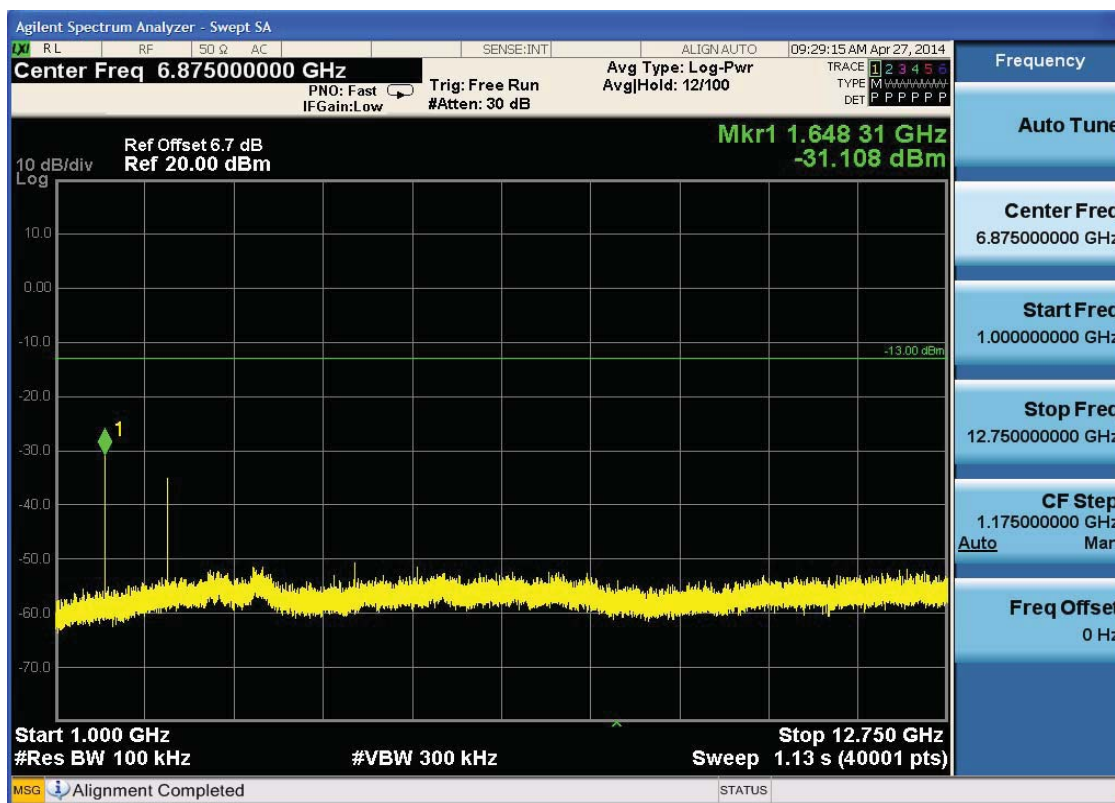

6.1.1.1.2 Test Channel = MCH

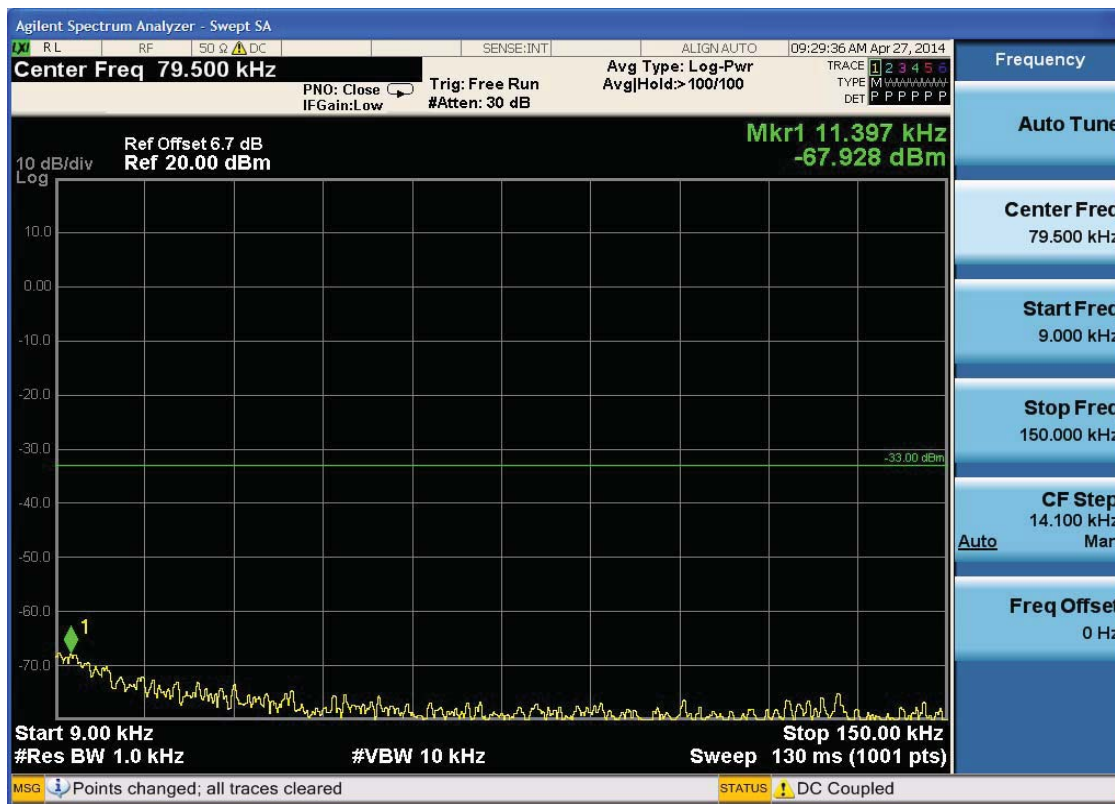



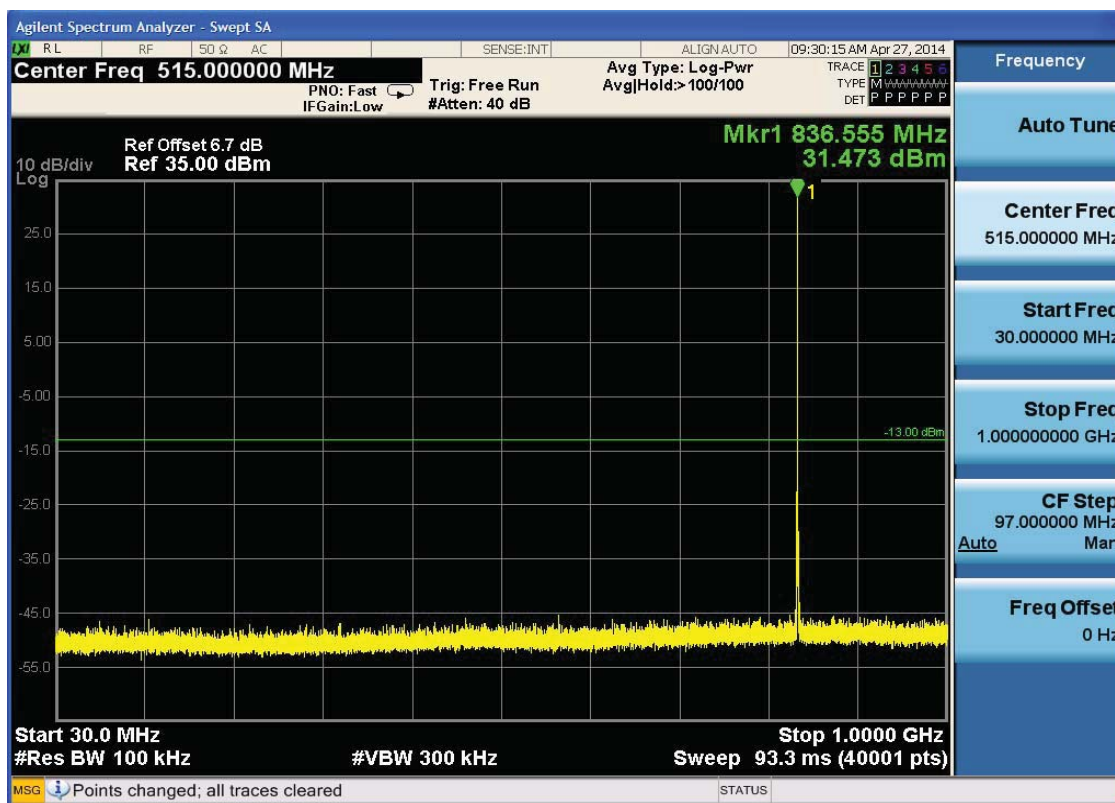



6.1.1.1.3 Test Channel = HCH



