



RF TEST REPORT

Applicant Huawei Technologies Co., Ltd.
FCC ID QISR227H
Product Mobile WiFi
Brand HUAWEI
Model R227h
Report No. RHA1705-0046RF03R2
Issue Date July 10, 2017

TA Technology (Shanghai) Co., Ltd. tested the above equipment in accordance with the requirements in **FCC CFR47 Part 2 (2017)/ FCC CFR47 Part 27C (2017)**. The test results show that the equipment tested is capable of demonstrating compliance with the requirements as documented in this report.

Performed by: Jiangpeng Lan

Approved by: Kai Xu

TA Technology (Shanghai) Co., Ltd.

No.145, Jintang Rd, Tangzhen Industry Park, Pudong Shanghai, China

TEL: +86-021-50791141/2/3

FAX: +86-021-50791141/2/3-8000

Table of Contents

1	Test Laboratory.....	4
1.1	Notes of the Test Report	4
1.2	Test facility	4
1.3	Testing Location.....	5
2	General Description of Equipment under Test.....	6
2.1	Applied Standards.....	8
3	Test Configuration	9
4	Test Information.....	10
4.1	RF Power Output	10
4.2	Effective Isotropic Radiated Power	16
4.3	Occupied Bandwidth	21
4.4	Band Edge Compliance	32
4.5	Peak-to-Average Power Ratio (PAPR).....	45
4.6	Frequency Stability.....	48
4.7	Spurious Emissions at Antenna Terminals	52
4.8	Radiates Spurious Emission	65
5	Main Test Instruments	79
ANNEX A:	EUT Appearance and Test Setup	80
A.1	EUT Appearance.....	80
A.2	Test Setup.....	82

Summary of Measurement Results

Number	Test Case	Clause in FCC rules	Verdict
1	RF power output	2.1046	PASS
2	Effective Isotropic Radiated power	27.50(h)(2)	PASS
3	Occupied Bandwidth	2.1049	PASS
4	Band Edge Compliance	27.53(m)	PASS
5	Peak-to-Average Power Ratio	27.50(d)/KDB971168 D01(5.7)	PASS
6	Frequency Stability	2.1055 / 27.54	PASS
7	Spurious Emissions at Antenna Terminals	27.53(m)	PASS
8	Radiates Spurious Emission	2.1053 27.53(m)	PASS
Date of Testing: May 9, 2017 ~ May 18, 2017			
Note: PASS: The EUT complies with the essential requirements in the standard. FAIL: The EUT does not comply with the essential requirements in the standard.			

1 Test Laboratory

1.1 Notes of the Test Report

This report shall not be reproduced in full or partial, without the written approval of **TA technology (shanghai) co., Ltd.** The results documented in this report apply only to the tested sample, under the conditions and modes of operation as described herein .Measurement Uncertainties were not taken into account and are published for informational purposes only. This report is written to support regulatory compliance of the applicable standards stated above. This report must not be used by the client to claim product certification, approval, or endorsement by any government agencies.

1.2 Test facility

CNAS (accreditation number: L2264)

TA Technology (Shanghai) Co., Ltd. has obtained the accreditation of China National Accreditation Service for Conformity Assessment (CNAS).

FCC (recognition number is 428261)

TA Technology (Shanghai) Co., Ltd. has been listed on the US Federal Communications Commission list of test facilities recognized to perform electromagnetic emissions measurements.

IC (recognition number is 8510A)

TA Technology (Shanghai) Co., Ltd. has been listed by industry Canada to perform electromagnetic emission measurement.

A2LA (Certificate Number: 3857.01)

TA Technology (Shanghai) Co., Ltd. has been listed by American Association for Laboratory Accreditation to perform electromagnetic emission measurement.

1.3 Testing Location

Company: TA Technology (Shanghai) Co., Ltd.
Address: No.145, Jintang Rd, Tangzhen Industry Park, Pudong Shanghai, China
City: Shanghai
Post code: 201201
Country: P. R. China
Contact: Xu Kai
Telephone: +86-021-50791141/2/3
Fax: +86-021-50791141/2/3-8000
Website: <http://www.ta-shanghai.com>
E-mail: xukai@ta-shanghai.com

2 General Description of Equipment under Test

Client Information

Applicant	Huawei Technologies Co., Ltd.
Applicant address	Administration Building, Headquarters of Huawei Technologies Co., Ltd., Bantian, Longgang District, Shenzhen, 518129, P.R.China.
Manufacturer	Huawei Technologies Co., Ltd.
Manufacturer address	Administration Building, Headquarters of Huawei Technologies Co., Ltd., Bantian, Longgang District, Shenzhen, 518129, P.R.China.

General information

EUT Description			
Model:	R227h		
SN:	/		
Hardware Version:	CL1E5785SM06		
Software Version:	21.130.00.00.00		
Power Supply:	Battery/AC adapter		
Antenna Type:	Internal Antenna		
Test Mode(s):	LTE Band 7; LTE Band 38;		
Maximum E.I.R.P.	LTE Band 7: 24.59dBm LTE Band 38: 22.74dBm		
LTE Category	6 (Support Carrier Aggregation downlink only)		
Rated Power Supply Voltage:	3.8V		
Extreme Voltage:	Minimum: 3.6V Maximum: 4.2V		
Extreme Temperature:	Lowest: 0°C Highest: +35°C		
Operating Frequency Range(s)	Mode	Tx (MHz)	Rx (MHz)
	LTE Band 7	2500 ~ 2570	2620 ~ 2690
	LTE Band 38	2570 ~ 2620	2570 ~ 2620
EUT Accessory			
Adapter 1	Manufacturer: Huizhou BYD Electronic Co., Ltd Model: HW-050200E01		
Adapter 2	Manufacturer: Shenzhen Huntkey Electronic Co., Ltd Model: HW-050200E01		
Adapter 3	Manufacturer: Huizhou BYD Electronic Co., Ltd Model: HW-050200U01		
Adapter 4	Manufacturer: Shenzhen Huntkey Electronic Co., Ltd Model: HW-050200U01		
Adapter 5	Manufacturer: Dongguan Phitek Electronic Co., Ltd Model: HW-050200U01		
Adapter 6	Manufacturer: Huizhou BYD Electronic Co., Ltd Model: HW-050200B01		



Adapter 7	Manufacturer: Shenzhen Huntkey Electronic Co., Ltd Model: HW-050200B01
Adapter 8	Manufacturer: Dongguan Phitek Electronic Co., Ltd Model: HW-050200B01
Adapter 9	Manufacturer: Huizhou BYD Electronic Co., Ltd Model: HW-050200A01
Adapter 10	Manufacturer: Shenzhen Huntkey Electronic Co., Ltd Model: HW-050200A01
Adapter 11	Manufacturer: Dongguan Phitek Electronic Co., Ltd Model: HW-050200A01
Battery	Manufacturer: Huawei Technologies Co., Ltd. Model: HB824666RBC Power Rating: DC 3.8V, 3000mAh, Li-ion
USB Extend Cable	100m Cable, Shielded
Note: 1. The information of the EUT is declared by the manufacturer. Please refer to the specifications or user manual for details.	



2.1 Applied Standards

According to the specifications of the manufacturer, it must comply with the requirements of the following standards:

Test standards

FCC CFR47 Part 2 (2017)

FCC CFR47 Part 27C (2017)

ANSI/TIA-603-D (2010)

KDB 971168 D01 Power Meas License Digital Systems v02r02

3 Test Configuration

Radiated measurements are performed by rotating the EUT in three different orthogonal test planes. EUT stand-up position (Z axis), lie-down position (X, Y axis). Receiver antenna polarization (horizontal and vertical), the worst emission was found in position (Z axis, vertical polarization) and the worst case was recorded.

All mode and data rates and positions and RB size and modulations were investigated.

Subsequently, only the worst case emissions are reported.

The following testing in LTE is set based on the maximum RF Output Power.

The following testing in different Bandwidth is set to detail in the following table:

Test items	Modes	Bandwidth (MHz)				Modulation		RB			Test Channel		
		5	10	15	20	QPSK	16QAM	1	50%	100%	L	M	H
RF power output	LTE 7	O	O	O	O	O	O	O	O	O	O	O	O
	LTE 38	O	O	O	O	O	O	O	O	O	O	O	O
Effective Isotropic Radiated power	LTE 7	O	O	O	O	O	O	O	-	-	O	O	O
	LTE 38	O	O	O	O	O	O	O	-	-	O	O	O
Occupied Bandwidth	LTE 7	O	O	O	O	O	O	-	-	O	O	O	O
	LTE 38	O	O	O	O	O	O	-	-	O	O	O	O
Band Edge Compliance	LTE 7	O	O	O	O	O	O	O	-	O	O	-	O
	LTE 38	O	O	O	O	O	O	O	-	O	O	-	O
Peak-to-Average Power Ratio	LTE 7	O	O	O	O	O	O	-	-	O	O	O	O
	LTE 38	O	O	O	O	O	O	-	-	O	O	O	O
Frequency Stability	LTE 7	O	O	O	O	O	O	-	-	O	-	O	-
	LTE 38	O	O	O	O	O	O	-	-	O	-	O	-
Spurious Emissions at Antenna Terminals	LTE 7	O	O	O	O	O	-	O	-	-	O	O	O
	LTE 38	O	O	O	O	O	-	O	-	-	O	O	O
Radiates Spurious Emission	LTE 7	O	O	O	O	O	-	O	-	-	O	O	O
	LTE 38	O	O	O	O	O	-	O	-	-	O	O	O
Note	1. The mark "O" means that this configuration is chosen for testing. 2. The mark "-" means that this configuration is not testing.												

4 Test Information

4.1 RF Power Output


Ambient condition

Temperature	Relative humidity	Pressure
23°C ~25°C	45%~50%	101.5kPa

Methods of Measurement

During the process of the testing, The EUT is controlled by the Base Station Simulator to ensure max power transmission and proper modulation.

Test Setup

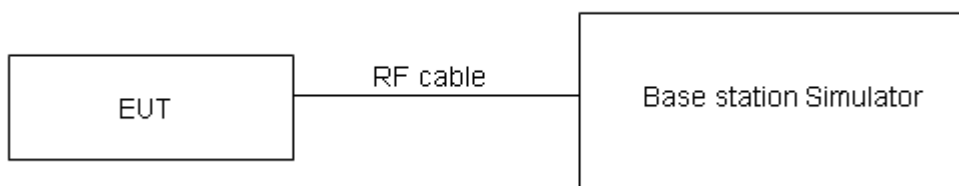

The loss between RF output port of the EUT and the input port of the tester has been taken into consideration.

Limits

No specific RF power output requirements in part 2.1046.

Measurement Uncertainty

The assessed measurement uncertainty to ensure 95% confidence level for the normal distribution is with the coverage factor $k = 2$, $U=0.4$ dB.

Test Results

LTE FDD Band 7				Conducted Power(dBm)		
Bandwidth	Modulation	RB size	RB offset	Channel		
				20775	21100	21425
5MHz	QPSK	1	0	22.57	22.24	22.79
		1	13	22.42	22.01	22.09
		1	24	22.90	22.24	22.98
		12	0	21.74	21.31	21.40
		12	6	21.38	21.26	21.27
		12	13	21.58	21.34	21.89
		25	0	21.54	21.42	21.45
	16QAM	1	0	22.49	22.10	22.70
		1	13	22.58	21.85	21.73
		1	24	22.80	22.19	22.95
		12	0	21.77	21.78	21.81
		12	6	20.87	20.66	20.80
		12	13	20.98	20.75	20.92
		25	0	20.93	20.68	20.84
Bandwidth	Modulation	RB size	RB offset	Channel		
				20800	21100	21400
10MHz	QPSK	1	0	22.59	22.25	22.82
		1	25	22.45	22.06	22.13
		1	49	22.92	22.28	23.01
		25	0	21.77	21.36	21.44
		25	13	21.41	21.31	21.31
		25	25	21.60	21.38	21.94
		50	0	21.62	21.44	21.49
	16QAM	1	0	22.51	22.13	22.72
		1	25	22.61	21.89	21.76
		1	49	22.83	22.21	22.98
		25	0	21.80	21.83	21.85
		25	13	20.89	20.70	20.83
		25	25	21.01	20.80	20.96
		50	0	20.96	20.73	20.88
Bandwidth	Modulation	RB size	RB offset	Channel		
				20825	21100	21375
15MHz	QPSK	1	0	22.58	22.21	22.80
		1	38	22.43	22.05	22.10
		1	74	22.89	22.23	22.97
		36	0	21.75	21.32	21.41
		36	18	21.38	21.26	21.27
		36	39	21.57	21.35	21.90
		75	0	21.60	21.40	21.44



	16QAM	1	0	22.46	22.11	22.70
		1	38	22.59	21.86	21.74
		1	74	22.80	22.17	22.95
		36	0	21.77	21.81	21.82
		36	18	20.86	20.65	20.79
		36	39	20.99	20.76	20.93
		75	0	20.93	20.68	20.84
Bandwidth	Modulation	RB size	RB offset	Channel		
				20850	21100	21350
20MHz	QPSK	1	0	22.55	22.17	22.77
		1	50	22.42	22.01	22.08
		1	99	22.87	22.22	22.94
		50	0	21.72	21.27	21.37
		50	25	21.36	21.22	21.24
		50	50	21.54	21.30	21.86
		100	0	21.57	21.35	21.40
	16QAM	1	0	22.44	22.07	22.65
		1	50	22.55	21.84	21.70
		1	99	22.78	22.14	22.93
		50	0	21.74	21.77	21.79
		50	25	20.83	20.63	20.76
		50	50	20.96	20.71	20.89
		100	0	20.91	20.64	20.81

LTE FDD Band 38				Conducted Power(dBm)		
Bandwidth	Modulation	RB size	RB offset	Channel		
				37775	38000	38225
5MHz	QPSK	1	0	23.17	23.28	23.23
		1	13	23.19	23.56	23.32
		1	24	22.68	22.80	22.80
		12	0	22.05	22.47	22.50
		12	6	22.21	22.22	22.20
		12	13	22.15	22.20	22.16
		25	0	22.09	22.16	22.23
	16QAM	1	0	22.43	22.16	22.52
		1	13	22.58	22.50	22.76
		1	24	22.40	22.25	22.08
		12	0	22.04	22.16	22.19
		12	6	22.23	22.24	22.17
		12	13	22.10	22.25	22.20
		25	0	22.12	22.11	22.12



Bandwidth	Modulation	RB size	RB offset	Channel		
				37800	38000	38200
10MHz	QPSK	1	0	23.19	23.29	23.26
		1	25	23.22	23.61	23.36
		1	49	22.70	22.84	22.83
		25	0	22.08	22.52	22.54
		25	13	22.24	22.27	22.24
		25	25	22.17	22.24	22.21
		50	0	22.17	22.18	22.27
	16QAM	1	0	22.45	22.19	22.54
		1	25	22.61	22.54	22.79
		1	49	22.43	22.27	22.11
		25	0	22.07	22.21	22.23
		25	13	22.25	22.28	22.20
		25	25	22.13	22.30	22.24
		50	0	22.15	22.16	22.16
Bandwidth	Modulation	RB size	RB offset	Channel		
				37825	38000	38175
15MHz	QPSK	1	0	23.18	23.25	23.24
		1	38	23.20	23.60	23.33
		1	74	22.67	22.79	22.79
		36	0	22.06	22.48	22.51
		36	18	22.21	22.22	22.20
		36	39	22.14	22.21	22.17
		75	0	22.15	22.14	22.22
	16QAM	1	0	22.40	22.17	22.52
		1	38	22.59	22.51	22.77
		1	74	22.40	22.23	22.08
		36	0	22.04	22.19	22.20
		36	18	22.22	22.23	22.16
		36	39	22.11	22.26	22.21
		75	0	22.12	22.11	22.12
Bandwidth	Modulation	RB size	RB offset	Channel		
				37850	38000	38150
20MHz	QPSK	1	0	23.15	23.21	23.21
		1	50	23.19	23.56	23.31
		1	99	22.65	22.78	22.76
		50	0	22.03	22.43	22.47
		50	25	22.19	22.18	22.17
		50	50	22.11	22.16	22.13
		100	0	22.12	22.09	22.18
	16QAM	1	0	22.38	22.13	22.47
		1	50	22.55	22.49	22.73



		1	99	22.38	22.20	22.06
		50	0	22.01	22.15	22.17
		50	25	22.19	22.21	22.13
		50	50	22.08	22.21	22.17
		100	0	22.10	22.07	22.09

Test frequencies for CA_38C									
Range	CC-Combo /NRB_agg [RB]	CC1 Note1			CC2 Note1			Rel 10 DL LTE CA Tx Power (dBm)	Rel 8 LTE Tx Power (dBm)
		BW [RB]	N _{UL/DL}	f _{UL/DL} [MHz]	BW [RB]	N _{UL/DL}	f _{UL/DL} [MHz]		
Low	75+75	75	37825	2577.5	75	37975	2592.5	22.14	22.2
	100+100	100	37850	2580	100	38048	2599.8	22.1	22.21
Mid	75+75	75	37925	2587.5	75	38075	2602.5	21.82	21.9
	100+100	100	37901	2585.1	100	38099	2604.9	21.75	21.82
High	75+75	75	38025	2597.5	75	38175	2612.5	21.83	21.93
	100+100	100	37952	2590.2	100	38150	2610	21.77	21.83

Test frequencies for CA_7C													
Range	CC-Combo /NRB_agg [RB]	CC1 Note1					CC2 Note1					Rel 10 DL LTE CA Tx Power (dBm)	Rel 8 LTE Tx Power (dBm)
		BW [RB]	N _{UL}	f _{UL} [MHz]	N _{DL}	f _{DL} [MHz]	BW [RB]	N _{UL}	f _{UL} [MHz]	N _{DL}	f _{DL} [MHz]		
Low	50+100	50	20805	2505.5	2805	2625.5	100	20949	2519.9	2949	2639.9	21.52	21.53
		100	20850	2510	2850	2630	50	20994	2524.4	2994	2644.4	21.54	21.56
	75+75	75	20825	2507.5	2825	2627.5	75	20975	2522.5	2975	2642.5	21.16	21.18
	75+100	75	20828	2507.8	2828	2627.8	100	20999	2524.9	2999	2644.9	21.24	21.26
		100	20850	2510	2850	2630	75	21021	2527.1	3021	2647.1	21.23	21.25
	100+100	100	20850	2510	2850	2630	100	21048	2529.8	3048	2649.8	21.33	21.35
Mid	50+100	50	21006	2525.6	3006	2645.6	100	21150	2540	3150	2660	20.83	20.84
		100	21051	2530.1	3051	2650.1	50	21195	2544.5	3195	2664.5	20.85	20.87
	75+75	75	21025	2527.5	3025	2647.5	75	21175	2542.5	3175	2662.5	20.79	20.82
	75+100	75	21003	2525.3	3003	2645.3	100	21174	2542.4	3174	2662.4	20.87	20.9
		100	21026	2527.6	3026	2647.6	75	21197	2544.7	3197	2664.7	20.86	20.87
	100+100	100	21001	2525.1	3001	2645.1	100	21199	2544.9	3199	2664.9	20.91	20.94
High	50+100	50	21206	2545.6	3206	2665.6	100	21350	2560	3350	2680	20.97	21
		100	21251	2550.1	3251	2670.1	50	21395	2564.5	3395	2684.5	20.96	20.99
	75+75	75	21225	2547.5	3225	2667.5	75	21375	2562.5	3375	2682.5	20.88	20.91



	75+100	75	21179	2542.9	3179	2662.9	100	21350	2560	3350	2680	21.02	21.03
		100	21201	2545.1	3201	2665.1	75	21372	2562.2	3372	2682.2	21.04	21.07
	100+100	100	21152	2540.2	3152	2660.2	100	21350	2560	3350	2680	21.05	21.07

Test frequencies for CA_7B													
Range	CC-Combo /NRB_agg [RB]	CC1 Note1					CC2 Note1					Rel 10 DL LTE CA Tx Power (dBm)	Rel 8 LTE Tx Power (dBm)
		BW [RB]	N _{UL}	f _{UL} [MHz]	N _{DL}	f _{DL} [MHz]	BW [RB]	N _{UL}	f _{UL} [MHz]	N _{DL}	f _{DL} [MHz]		
Low	75+25	75	20825	2507.5	2825	2627.5	25	20918	2516.8	2918	2636.8	21.49	21.51
Mid	75+25	75	21076	2532.6	3076	2652.6	25	21169	2541.9	3169	2661.9	20.87	20.90
High	75+25	75	21327	2557.7	3327	2677.7	25	21420	2567.0	3420	2687	21.09	21.11

4.2 Effective Isotropic Radiated Power

Ambient condition

Temperature	Relative humidity	Pressure
23°C ~25°C	45%~50%	101.5kPa


Methods of Measurement

The measurement procedures in TIA- 603-D are used.

1. The EUT was placed on a turntable with 1.5 meter height in a fully anechoic chamber.
 2. The EUT was set at 3 meters from the receiving antenna, which was mounted on the antennatower.
 3. UMTS operating modes: Set RBW= 100 KHz, VBW= 300 KHz, RMS detector over frame, and use channel power option with bandwidth=5MHz, per section 4.0 of KDB 971168 D01.
 4. The table was rotated 360 degrees to determine the position of the highest radiated power.
 5. The height of the receiving antenna is adjusted to look for the maximum ERP/EIRP.
 6. Taking the record of maximum ERP/EIRP.
 7. A dipole antenna was substituted in place of the EUT and was driven by a signal generator.
 8. The conducted power at the terminal of the dipole antenna is measured.
 9. Repeat step 3 to step 5 to get the maximum ERP/EIRP of the substitution antenna.
 10. $ERP/EIRP = P_s + E_t - E_s + G_s = P_s + R_t - R_s + G_s$
- P_s (dBm) : Input power to substitution antenna.
 G_s (dBi or dBd) : Substitution antenna Gain.
 $E_t = R_t + AF$
 $E_s = R_s + AF$
 AF (dB/m) : Receive antenna factor
 R_t : The highest received signal in spectrum analyzer for EUT.
 R_s : The highest received signal in spectrum analyzer for substitution antenna.

$$EIRP = E.R.P + 2.15$$

Test Setup

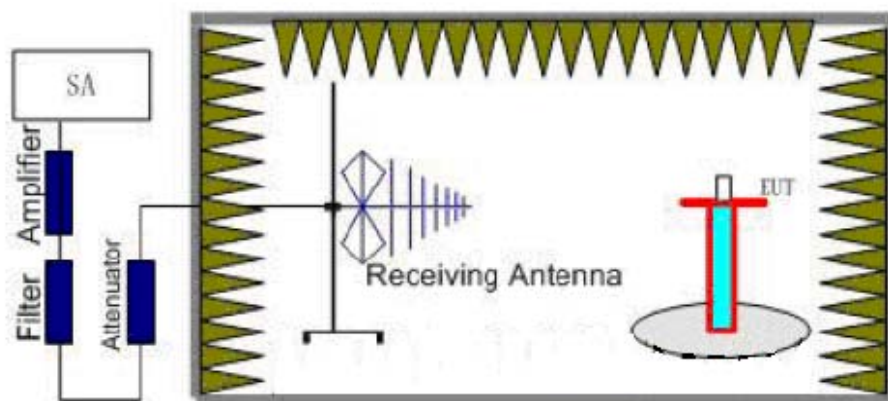

Limits

Rule Part 27.50(h) (2) specifies that “Mobile and other user stations. Mobile stations are limited to 2.0 watts EIRP. All user stations are limited to 2.0 watts transmitter output power.”

Part 27.50(h)(2) Limit (EIRP)	$\leq 2\text{ W}$ (33 dBm)
-------------------------------	----------------------------

Measurement Uncertainty

The assessed measurement uncertainty to ensure 95% confidence level for the normal distribution is with the coverage factor $k = 2$, $U = 1.19\text{ dB}$

Test Results

LTE Band 7								
Band width	Frequency (MHz)	Ant Pot (H/V)	Rt (dBm)	Rs (dBm)	Ps (dBm)	Gs (dBi)	EIRP (dBm)	Conclusion
5MHz (QPSK)	2502.5	H	-38.91	-59.64	0.00	1.81	22.54	Pass
	2535	H	-40.26	-59.72	0.00	1.81	21.27	Pass
	2567.5	H	-40.89	-59.98	0.00	1.83	20.92	Pass
	2502.5	V	-47.77	-59.31	0.00	1.81	13.35	Pass
	2535	V	-47.03	-59.11	0.00	1.81	13.89	Pass
	2567.5	V	-48.01	-59.59	0.00	1.83	13.41	Pass
5MHz (16QAM)	2502.5	H	-39.21	-59.64	0.00	1.81	22.24	Pass
	2535	H	-40.58	-59.72	0.00	1.81	20.95	Pass
	2567.5	H	-41.20	-59.98	0.00	1.83	20.61	Pass
	2502.5	V	-48.08	-59.31	0.00	1.81	13.04	Pass
	2535	V	-47.37	-59.11	0.00	1.81	13.55	Pass
	2567.5	V	-48.32	-59.59	0.00	1.83	13.10	Pass
10MHz (QPSK)	2505	H	-39.33	-59.61	0.00	1.82	22.10	Pass
	2535	H	-40.72	-59.72	0.00	1.81	20.81	Pass
	2565	H	-41.40	-60.02	0.00	1.81	20.43	Pass
	2505	V	-47.40	-59.33	0.00	1.82	13.75	Pass
	2535	V	-47.37	-59.11	0.00	1.81	13.55	Pass
	2565	V	-48.25	-59.59	0.00	1.81	13.15	Pass
10MHz (16QAM)	2505	H	-39.63	-59.61	0.00	1.82	21.80	Pass
	2535	H	-41.03	-59.72	0.00	1.81	20.50	Pass
	2565	H	-41.68	-60.02	0.00	1.81	20.15	Pass
	2505	V	-47.70	-59.33	0.00	1.82	13.45	Pass
	2535	V	-47.67	-59.11	0.00	1.81	13.25	Pass
	2565	V	-48.46	-59.59	0.00	1.81	12.94	Pass
15MHz (QPSK)	2507.5	H	-39.40	-59.71	0.00	1.80	22.11	Pass
	2535	H	-41.41	-59.72	0.00	1.81	20.12	Pass
	2562.5	H	-42.08	-60.08	0.00	1.82	19.82	Pass
	2507.5	V	-48.24	-59.29	0.00	1.80	12.85	Pass
	2535	V	-48.85	-59.72	0.00	1.81	12.68	Pass
	2562.5	V	-48.83	-59.46	0.00	1.82	12.45	Pass
15MHz (16QAM)	2507.5	H	-39.70	-59.71	0.00	1.80	21.81	Pass
	2535	H	-41.72	-59.72	0.00	1.81	19.81	Pass
	2562.5	H	-42.40	-60.08	0.00	1.82	19.50	Pass
	2507.5	V	-48.55	-59.29	0.00	1.80	12.54	Pass
	2535	V	-49.06	-59.72	0.00	1.81	12.47	Pass
	2562.5	V	-49.13	-59.46	0.00	1.82	12.15	Pass
20MHz (QPSK)	2510	H	-38.72	-59.52	0.00	1.77	22.57	Pass
	2535	H	-36.94	-59.72	0.00	1.81	24.59	Pass
	2560	H	-38.48	-60.01	0.00	1.82	23.35	Pass



	2510	V	-47.41	-59.09	0.00	1.77	13.45	Pass
	2535	V	-48.31	-59.72	0.00	1.81	13.22	Pass
	2560	V	-48.16	-59.52	0.00	1.82	13.18	Pass
20MHz (16QAM)	2510	H	-39.04	-59.52	0.00	1.77	22.25	Pass
	2535	H	-37.25	-59.72	0.00	1.81	24.28	Pass
	2560	H	-38.78	-60.01	0.00	1.82	23.05	Pass
	2510	V	-47.72	-59.09	0.00	1.77	13.14	Pass
	2535	V	-48.60	-59.72	0.00	1.81	12.93	Pass
	2560	V	-48.46	-59.52	0.00	1.82	12.88	Pass

LTE Band 38								
Band width	Frequency (MHz)	Ant Pot (H/V)	Rt (dBm)	Rs (dBm)	Ps (dBm)	Gs (dBi)	EIRP (dBm)	Conclusion
5MHz (QPSK)	2502.5	H	-41.45	-61.09	0.00	1.83	21.47	Pass
	2535	H	-40.92	-61.40	0.00	1.85	22.33	Pass
	2567.5	H	-42.09	-61.86	0.00	1.87	21.64	Pass
	2502.5	V	-48.99	-61.01	0.00	1.83	13.85	Pass
	2535	V	-47.70	-61.50	0.00	1.85	15.65	Pass
	2567.5	V	-47.99	-62.12	0.00	1.87	16.00	Pass
5MHz (16QAM)	2502.5	H	-41.75	-61.09	0.00	1.83	21.17	Pass
	2535	H	-41.25	-61.40	0.00	1.85	22.00	Pass
	2567.5	H	-42.40	-61.86	0.00	1.87	21.33	Pass
	2502.5	V	-49.37	-61.09	0.00	1.83	13.55	Pass
	2535	V	-47.90	-61.40	0.00	1.85	15.35	Pass
	2567.5	V	-48.05	-61.86	0.00	1.87	15.68	Pass
10MHz (QPSK)	2505	H	-41.53	-61.07	0.00	1.84	21.38	Pass
	2535	H	-40.66	-61.40	0.00	1.85	22.59	Pass
	2565	H	-42.18	-61.84	0.00	1.86	21.52	Pass
	2505	V	-49.19	-61.13	0.00	1.84	13.78	Pass
	2535	V	-47.58	-61.50	0.00	1.85	15.77	Pass
	2565	V	-48.27	-62.02	0.00	1.86	15.61	Pass
10MHz (16QAM)	2505	H	-41.86	-61.07	0.00	1.84	21.05	Pass
	2535	H	-41.00	-61.40	0.00	1.85	22.25	Pass
	2565	H	-42.48	-61.84	0.00	1.86	21.22	Pass
	2505	V	-49.46	-61.07	0.00	1.84	13.45	Pass
	2535	V	-47.79	-61.40	0.00	1.85	15.46	Pass
	2565	V	-48.40	-61.84	0.00	1.86	15.30	Pass
15MHz (QPSK)	2507.5	H	-41.65	-61.07	0.00	1.85	21.27	Pass
	2535	H	-40.70	-61.40	0.00	1.85	22.55	Pass
	2562.5	H	-42.41	-61.79	0.00	1.86	21.24	Pass
	2507.5	V	-49.41	-61.13	0.00	1.85	13.57	Pass
	2535	V	-47.78	-61.50	0.00	1.85	15.57	Pass
	2562.5	V	-48.70	-62.00	0.00	1.86	15.16	Pass



15MHz (16QAM)	2507.5	H	-41.97	-61.07	0.00	1.85	20.95	Pass
	2535	H	-41.00	-61.40	0.00	1.85	22.25	Pass
	2562.5	H	-42.70	-61.79	0.00	1.86	20.95	Pass
	2507.5	V	-49.67	-61.07	0.00	1.85	13.25	Pass
	2535	V	-47.98	-61.40	0.00	1.85	15.27	Pass
	2562.5	V	-48.80	-61.79	0.00	1.86	14.85	Pass
20MHz (QPSK)	2510	H	-41.37	-61.10	0.00	1.82	21.55	Pass
	2535	H	-40.51	-61.40	0.00	1.85	22.74	Pass
	2560	H	-41.76	-61.77	0.00	1.90	21.91	Pass
	2510	V	-49.08	-61.16	0.00	1.82	13.90	Pass
	2535	V	-47.63	-61.50	0.00	1.85	15.72	Pass
	2560	V	-48.18	-61.90	0.00	1.90	15.62	Pass
20MHz (16QAM)	2510	H	-41.67	-61.10	0.00	1.82	21.25	Pass
	2535	H	-40.82	-61.40	0.00	1.85	22.43	Pass
	2560	H	-42.07	-61.77	0.00	1.90	21.60	Pass
	2510	V	-49.32	-61.10	0.00	1.82	13.60	Pass
	2535	V	-47.84	-61.40	0.00	1.85	15.41	Pass
	2560	V	-48.35	-61.77	0.00	1.90	15.32	Pass

Note: 1. EIRP= E.R.P+2.15

4.3 Occupied Bandwidth

Ambient condition

Temperature	Relative humidity	Pressure
23°C ~25°C	45%~50%	101.5kPa

Method of Measurement


The EUT was connected to Spectrum Analyzer and Base Station Simulator via power Splitter. The occupied bandwidth is measured using spectrum analyzer.

RBW is set to 100 kHz, VBW is set to 300 kHz for LTE Band 7/38 (5MHz).

RBW is set to 300 kHz, VBW is set to 1MHz for LTE Band 7/38 (10MHz/15MHz/20MHz).

99% power and -26dBc occupied bandwidths are recorded. Spectrum analyzer plots are included on the following pages.

Test Setup

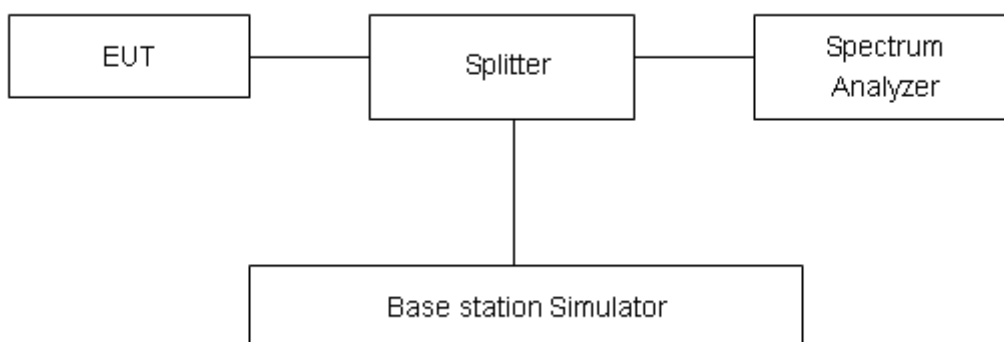

Limits

No specific occupied bandwidth requirements in part 2.1049.

Measurement Uncertainty

The assessed measurement uncertainty to ensure 95% confidence level for the normal distribution is with the coverage factor $k = 2$, $U=624\text{Hz}$.

Test Result

LTE Band 7						
RB	Modulation	Bandwidth (MHz)	Channel	Frequency (MHz)	99% Power Bandwidth(MHz)	-26dBc Bandwidth(MHz)
100%	QPSK	5	20775	2502.5	4.5297	4.976
			21100	2535	4.5278	5.025
			21425	2567.5	4.5131	4.967
		10	20800	2505	9.0847	10.05
			21100	2535	9.0851	10.05
			21400	2565	9.0731	10.04
		15	20825	2507.5	13.496	15.01
			21100	2535	13.537	15.06
			21375	2562.5	13.515	14.88
		20	20850	2510	17.951	19.61
			21100	2535	17.967	19.65
			21350	2560	17.907	19.51
	16QAM	5	20775	2502.5	4.5176	5.012
			21100	2535	4.5159	4.961
			21425	2567.5	4.5214	4.977
		10	20800	2505	9.0889	10.06
			21100	2535	9.0764	10.04
			21400	2565	9.0710	10.09
		15	20825	2507.5	13.571	15.03
			21100	2535	13.515	15.07
			21375	2562.5	13.524	14.89
		20	20850	2510	17.925	19.70
			21100	2535	17.975	19.58
			21350	2560	17.984	19.58

LTE Band 38						
RB	Modulation	Bandwidth (MHz)	Channel	Frequency (MHz)	99% Power Bandwidth(MHz)	-26dBc Bandwidth(MHz)
100%	QPSK	5	37775	2572.5	4.5256	5.193
			38000	2595	4.5229	4.952
			38225	2617.5	4.5040	4.994
		10	37800	2575	9.0746	10.77
			38000	2595	9.0877	10.63
			38200	2615	9.0789	10.01
		15	37825	2577.5	13.477	15.13
			38000	2595	13.484	16.54
			38175	2612.5	13.482	14.89
		20	37850	2580	17.931	19.83
			38000	2595	17.909	20.10
			38150	2610	17.919	23.73
	16QAM	5	37775	2572.5	4.5495	5.523
			38000	2595	4.5098	5.177
			38225	2617.5	4.5400	5.122
		10	37800	2575	9.0405	10.05
			38000	2595	9.0481	10.01
			38200	2615	9.0825	11.33
		15	37825	2577.5	13.491	14.91
			38000	2595	13.500	15.00
			38175	2612.5	13.471	14.98
		20	37850	2580	17.940	20.77
			38000	2595	17.941	20.33
			38150	2610	17.939	21.45




LTE Band 7 QPSK 5MHz CH-Low




LTE Band 7 16QAM 5MHz CH-Low




LTE Band 7 QPSK 5MHz CH-Middle

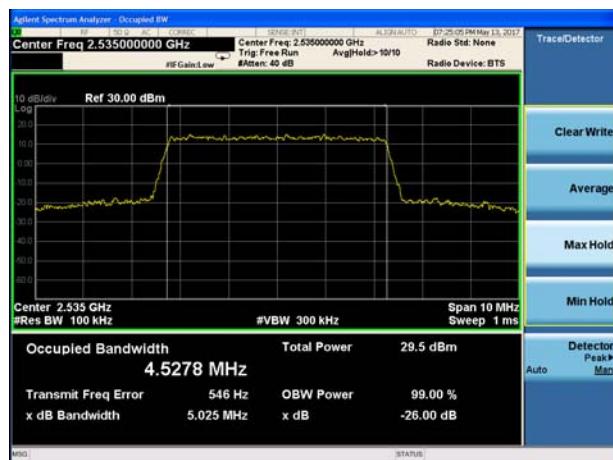


LTE Band 7 16QAM 5MHz CH-Middle

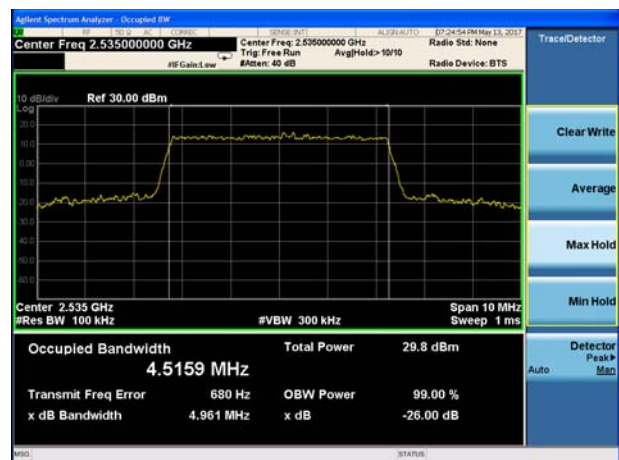

LTE Band 7 QPSK 5MHz CH-High

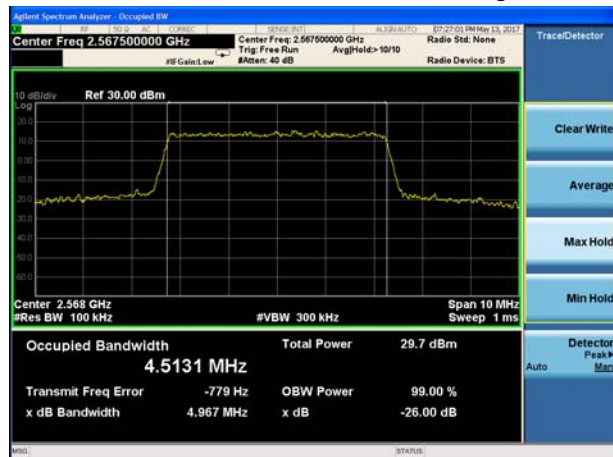


LTE Band 7 16QAM 5MHz CH-High

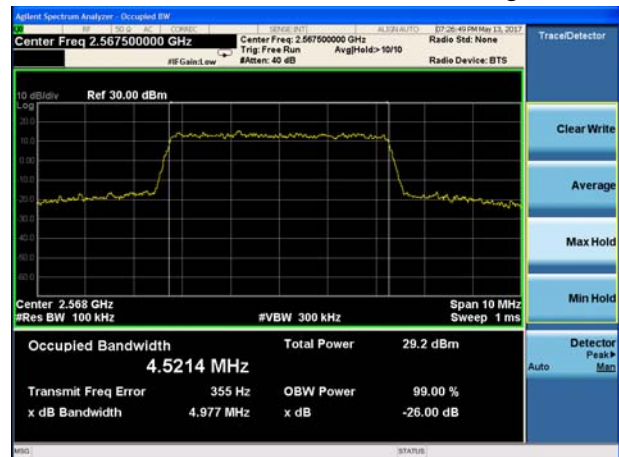





LTE Band 7 QPSK 10MHz CH-Low

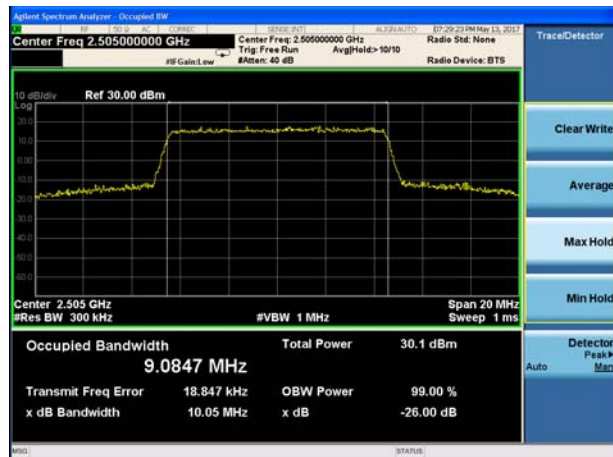


LTE Band 7 16QAM 10MHz CH-Low

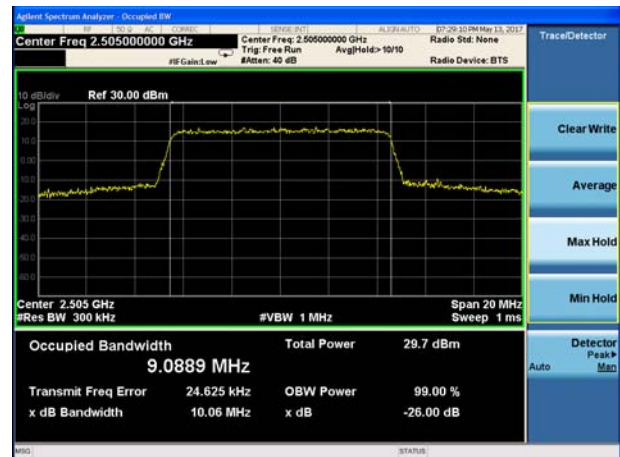

LTE Band 7 QPSK 10MHz CH-Middle

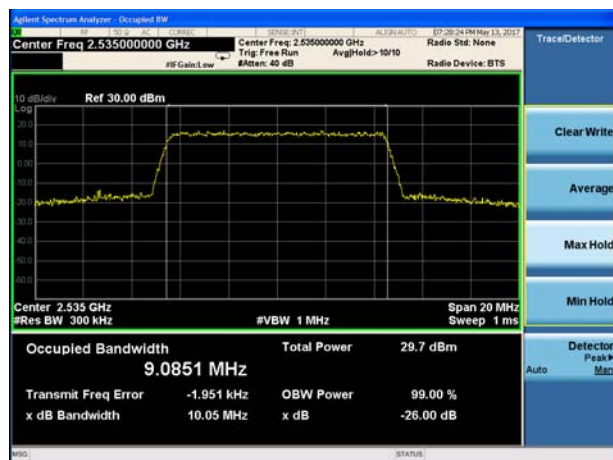


LTE Band 7 16QAM 10MHz CH-Middle

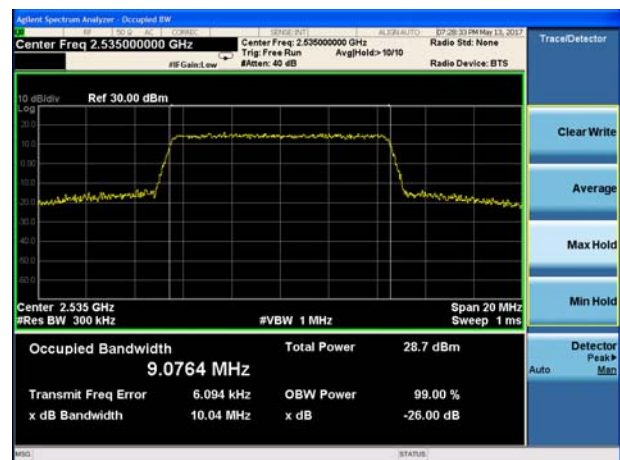

LTE Band 7 QPSK 10MHz CH-High



LTE Band 7 16QAM 10MHz CH-High

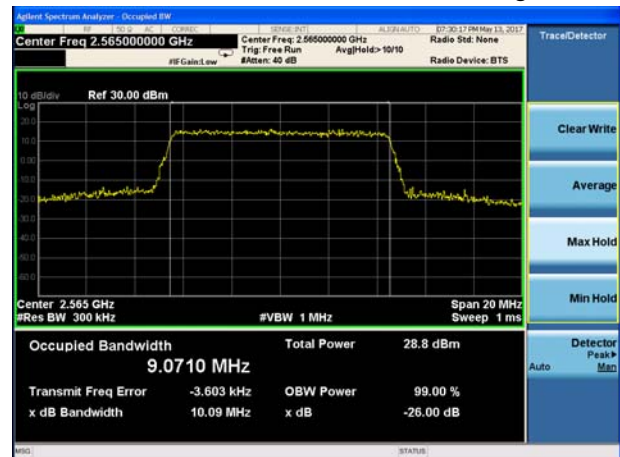





LTE Band 7 QPSK 15MHz CH-Low




LTE Band 7 16QAM 15MHz CH-Low

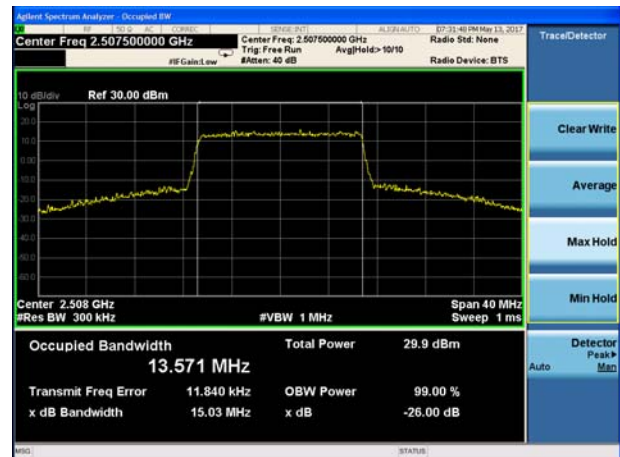


LTE Band 7 QPSK 15MHz CH-Middle

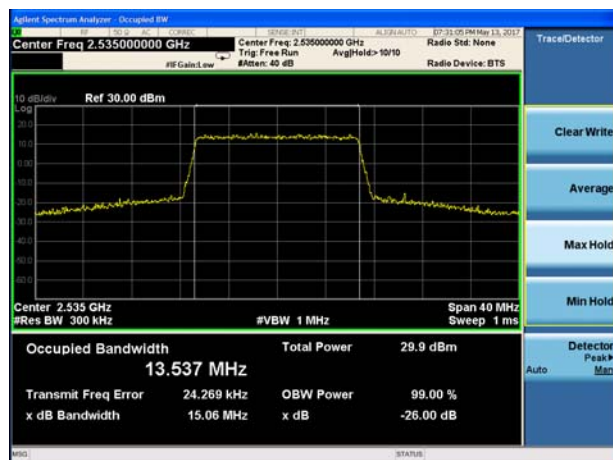


LTE Band 7 16QAM 15MHz CH-Middle

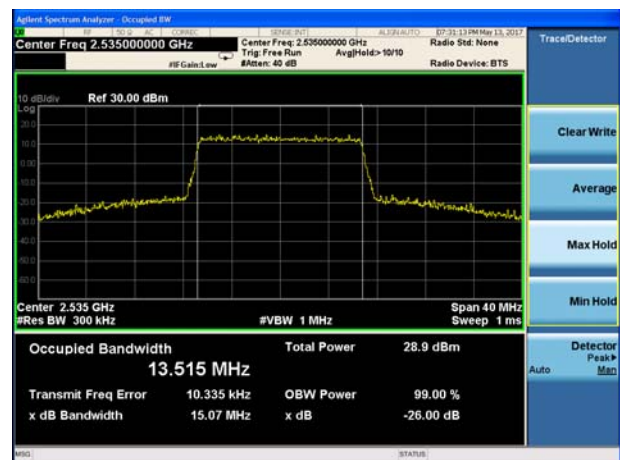

LTE Band 7 QPSK 15MHz CH-High

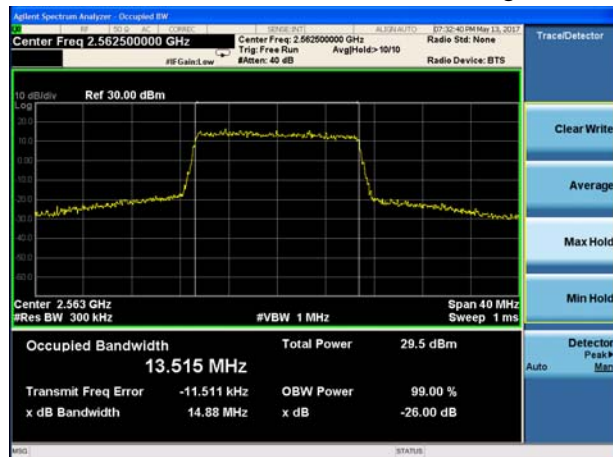


LTE Band 7 16QAM 15MHz CH-High

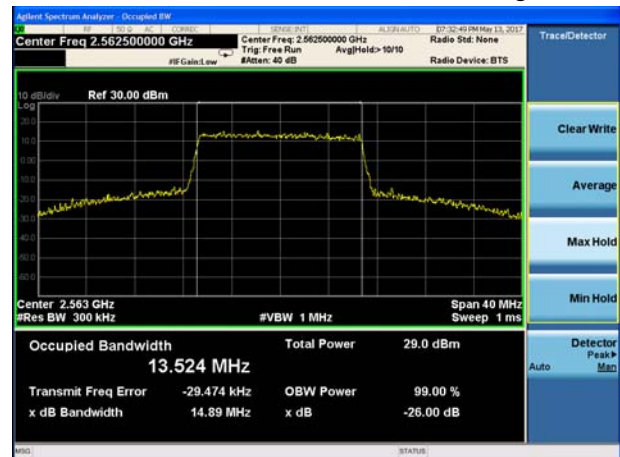





LTE Band 7 QPSK 20MHz CH-Low

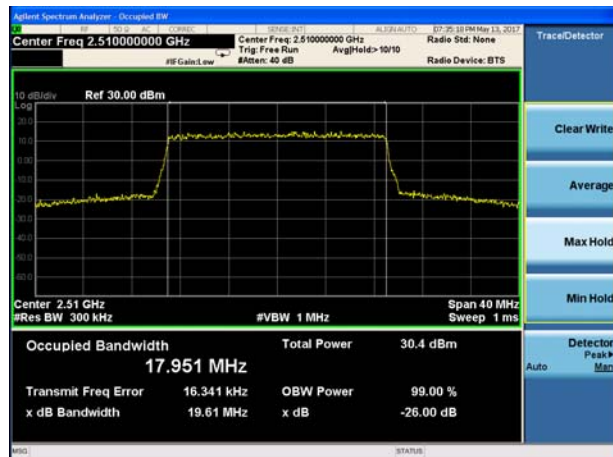


LTE Band 7 16QAM 20MHz CH-Low

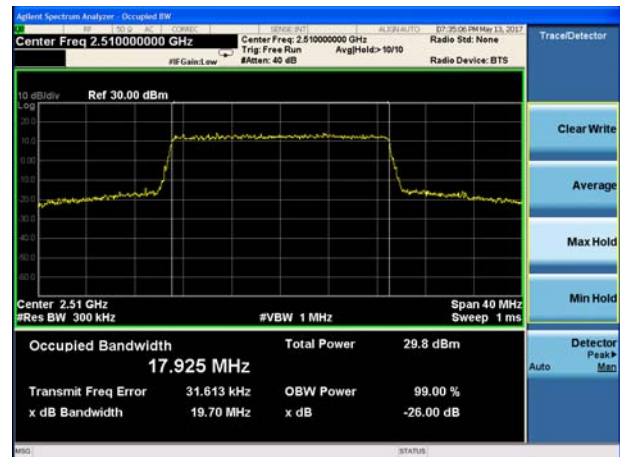


LTE Band 7 QPSK 20MHz CH-Middle

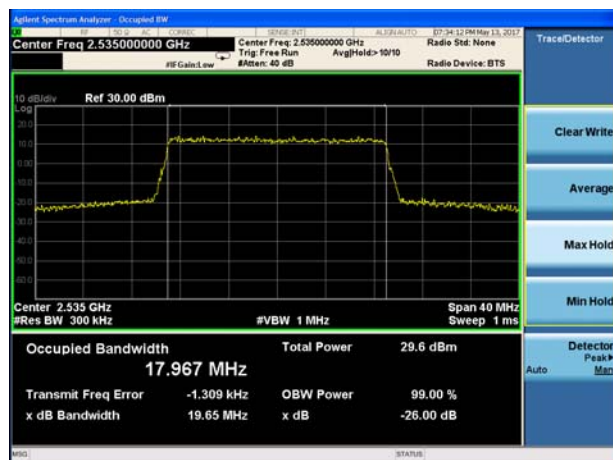


LTE Band 7 16QAM 20MHz CH-Middle

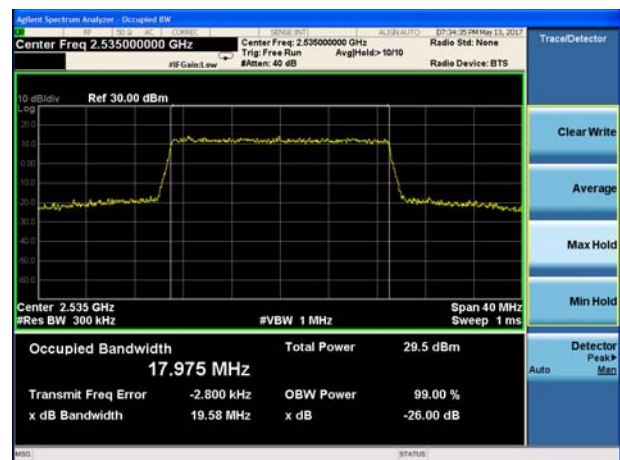

LTE Band 7 QPSK 20MHz CH-High

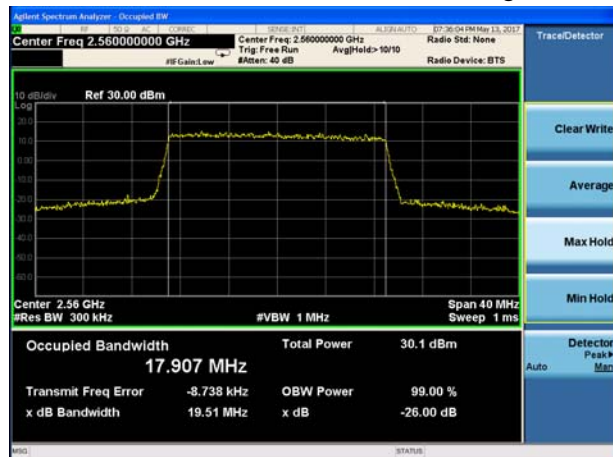

LTE Band 7 16QAM 20MHz CH-High

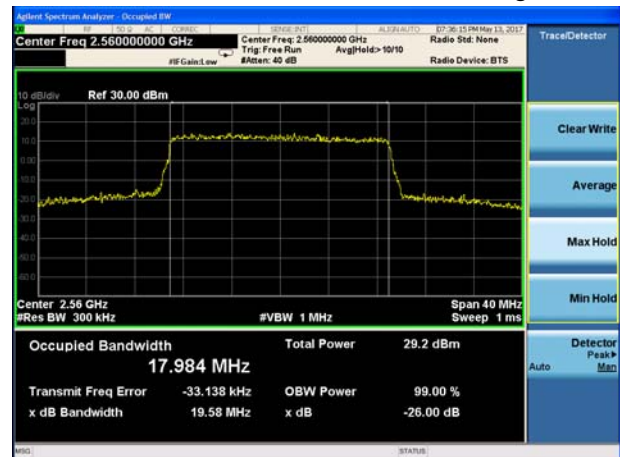





LTE Band 38 QPSK 5MHz CH-Low




LTE Band 38 16QAM 5MHz CH-Low

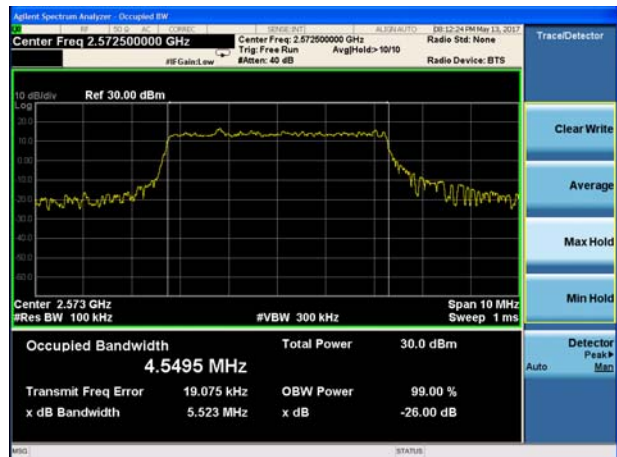

LTE Band 38 QPSK 5MHz CH-Middle

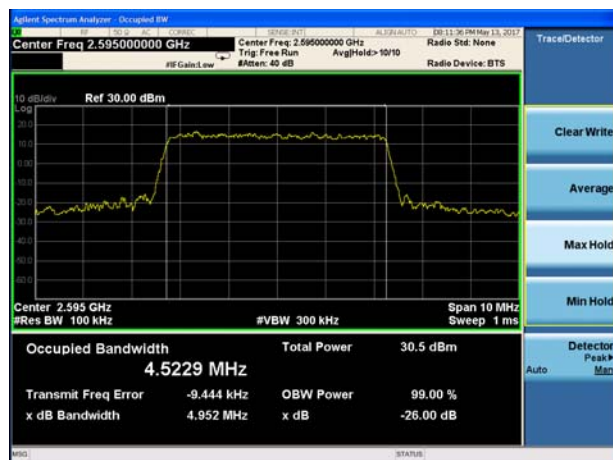


LTE Band 38 16QAM 5MHz CH-Middle

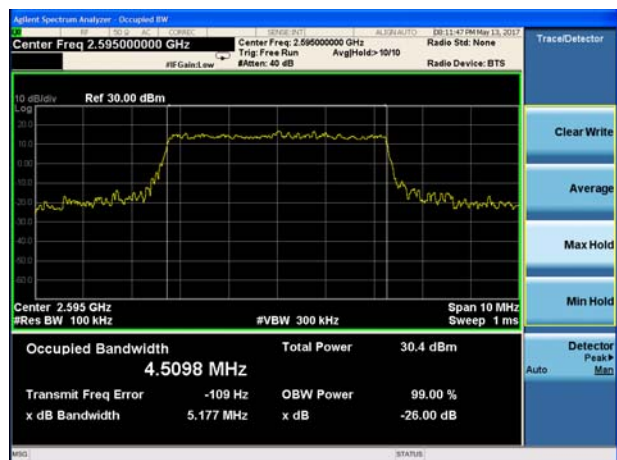

LTE Band 38 QPSK 5MHz CH-High




LTE Band 38 16QAM 5MHz CH-High

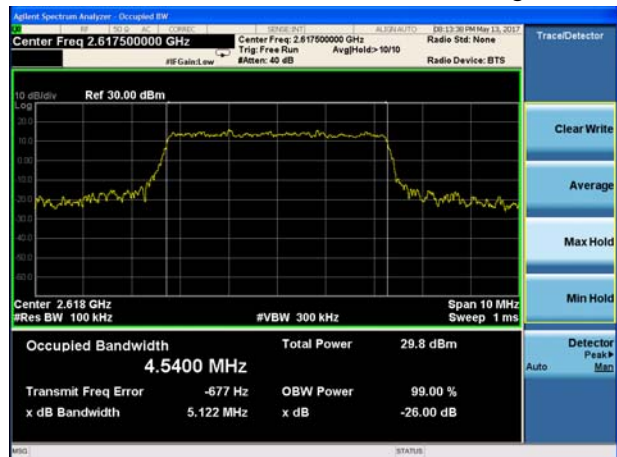





LTE Band 38 QPSK 10MHz CH-Low

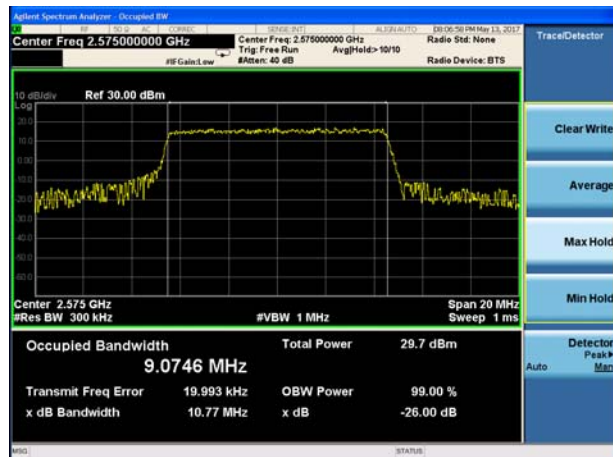


LTE Band 38 16QAM 10MHz CH-Low

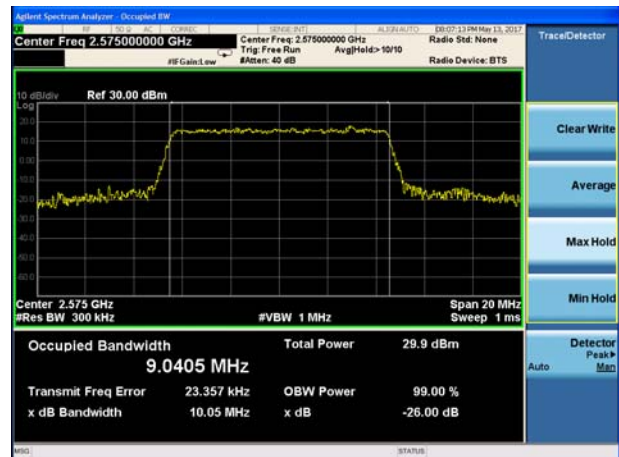


LTE Band 38 QPSK 10MHz CH-Middle

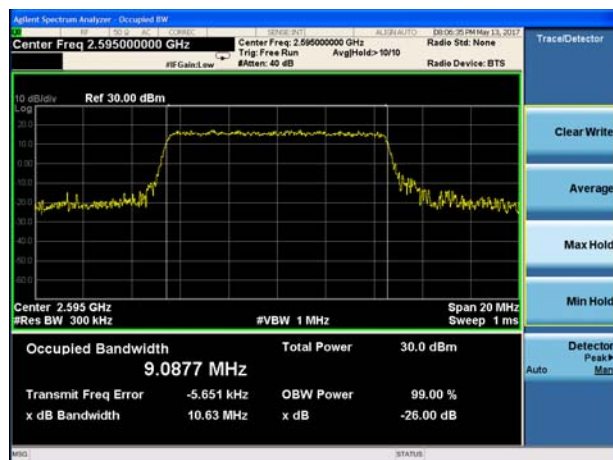

LTE Band 38 16QAM 10MHz CH-Middle

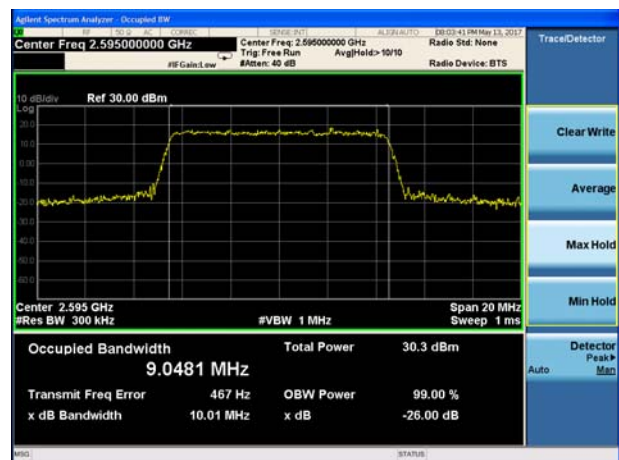

LTE Band 38 QPSK 10MHz CH-High

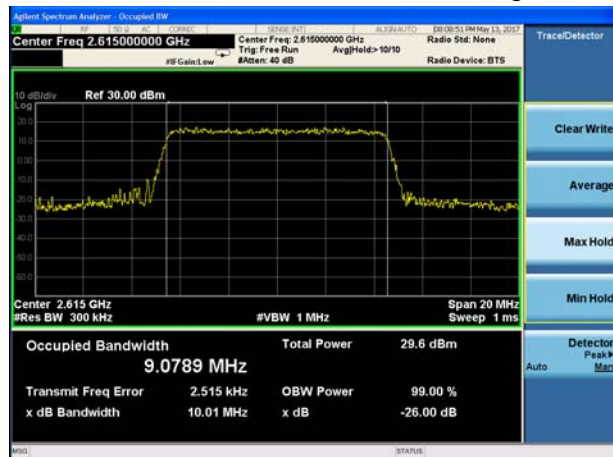


LTE Band 38 16QAM 10MHz CH-High







LTE Band 38 QPSK 15MHz CH-Low

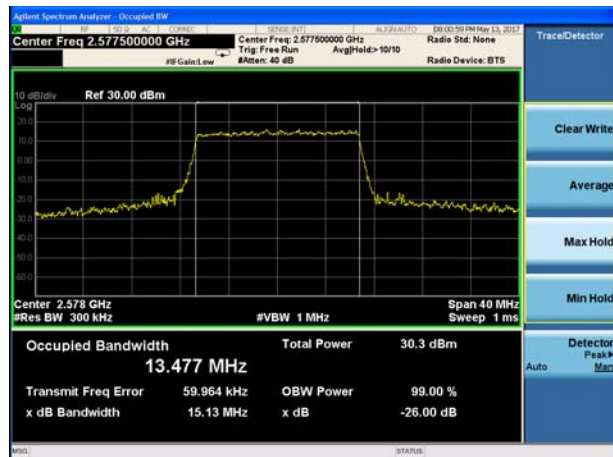


LTE Band 38 16QAM 15MHz CH-Low

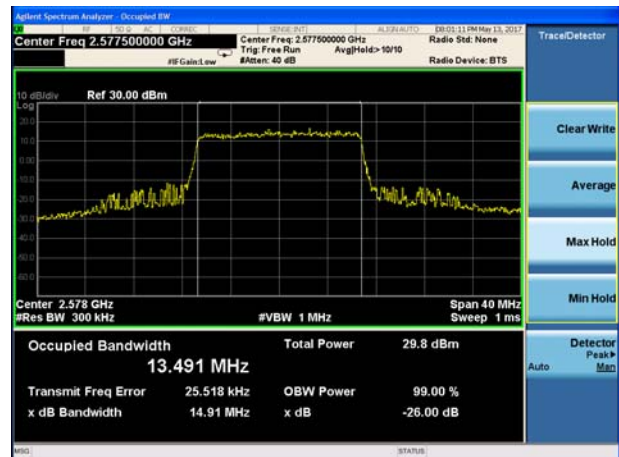


LTE Band 38 QPSK 15MHz CH-Middle

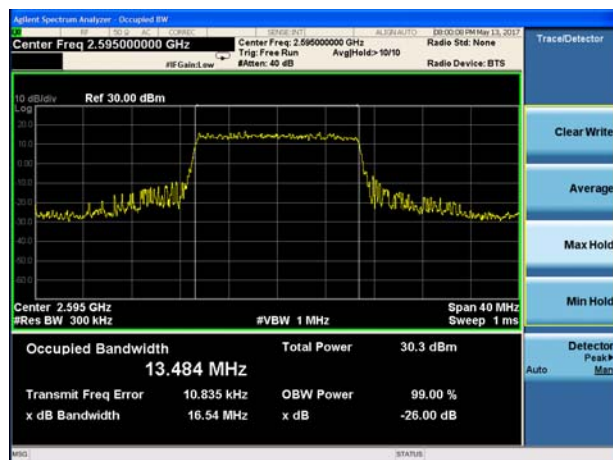


LTE Band 38 16QAM 15MHz CH-Middle

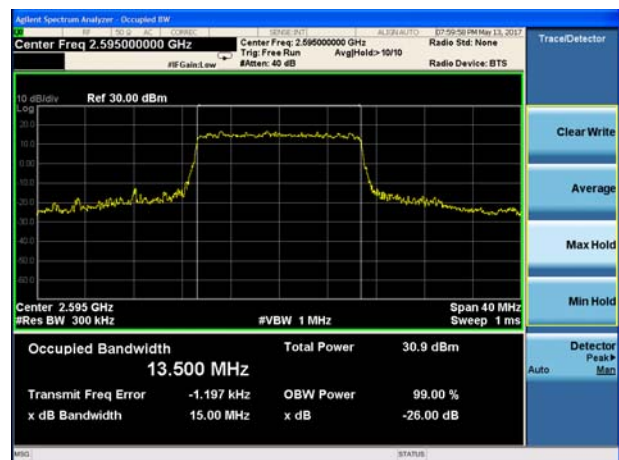

LTE Band 38 QPSK 15MHz CH-High

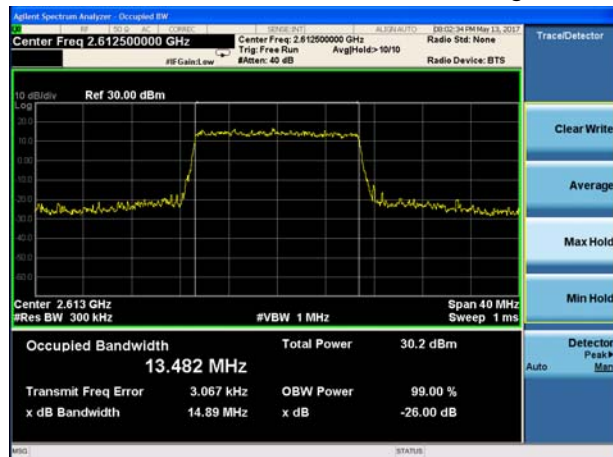


LTE Band 38 16QAM 15MHz CH-High

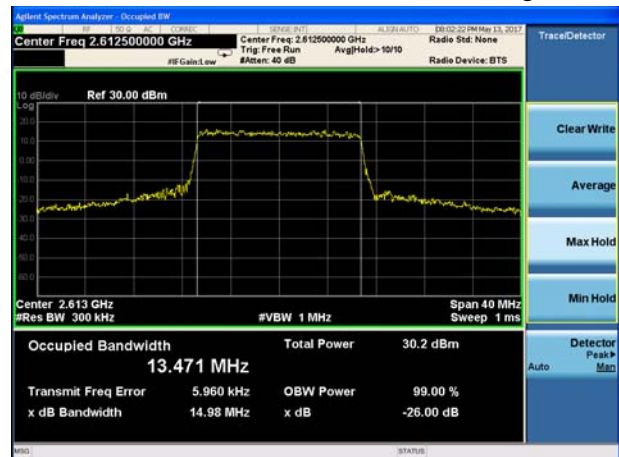





LTE Band 38 QPSK 20MHz CH-Low

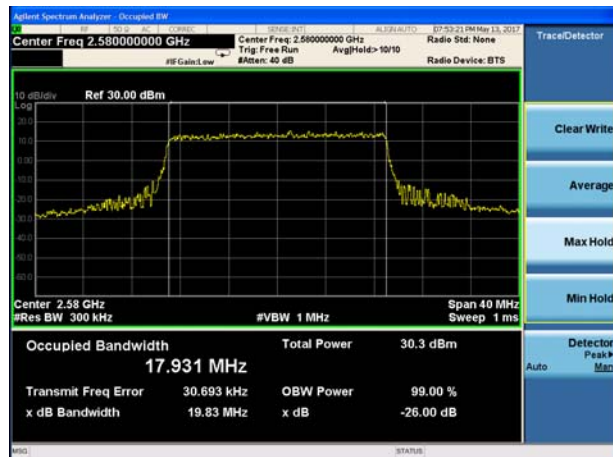


LTE Band 38 16QAM 20MHz CH-Low

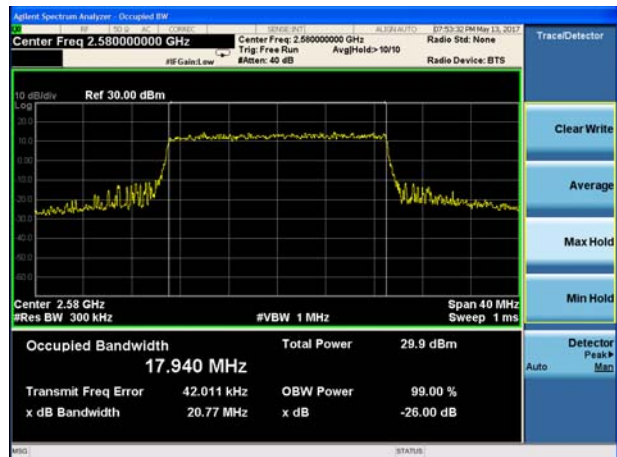


LTE Band 38 QPSK 20MHz CH-Middle

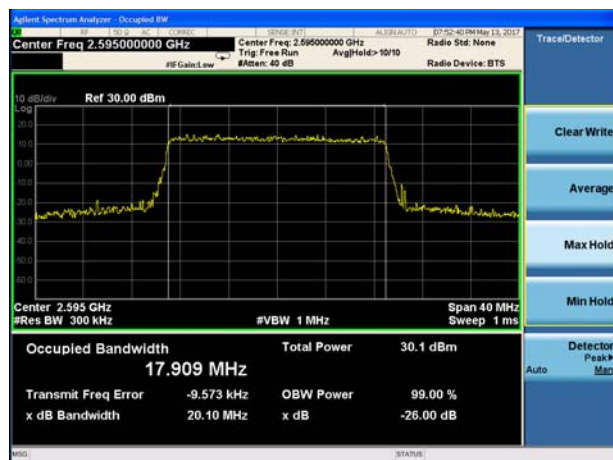


LTE Band 38 16QAM 20MHz CH-Middle

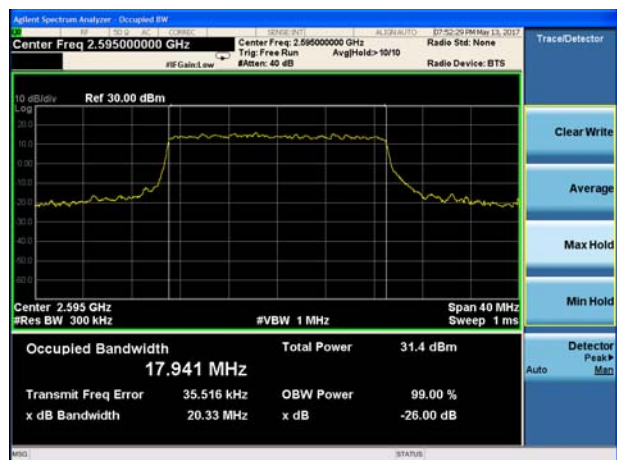

LTE Band 38 QPSK 20MHz CH-High

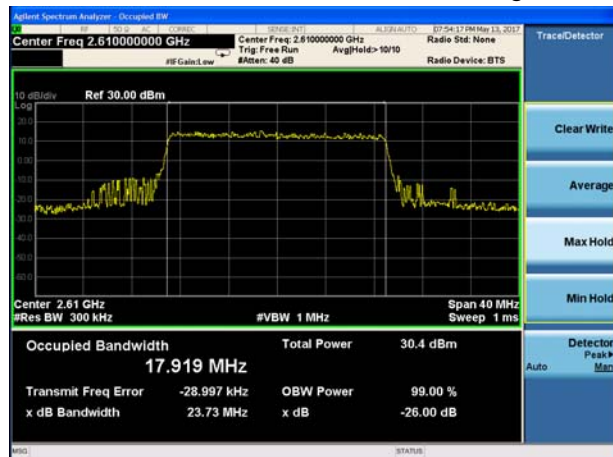

LTE Band 38 16QAM 20MHz CH-High

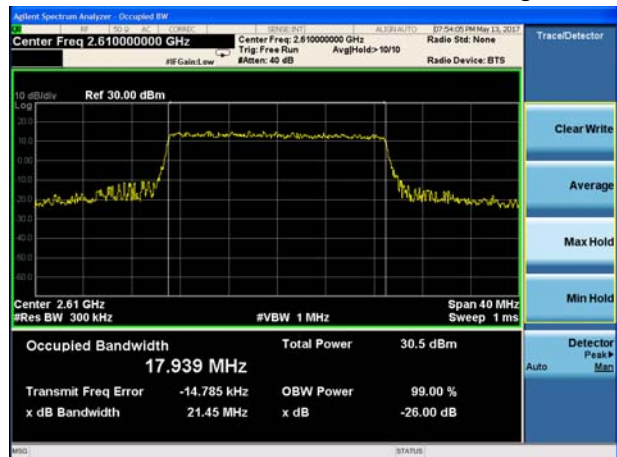

4.4 Band Edge Compliance

Ambient condition

Temperature	Relative humidity	Pressure
23°C ~25°C	45%~50%	101.5kPa


Method of Measurement

The EUT was connected to Spectrum Analyzer and Base Station Simulator via power Splitter. The band edge of the lowest and highest channels were measured.

The testing follows KDB 971168 v02r02 Section 6.0

- 1.The EUT was connected to spectrum analyzer and system simulator via a power divider.
2. The band edges of low and high channels for the highest RF powers were measured.
3. For LTE Band 38 Set RBW $\geq$ 1% EBW in the 1MHz band immediately outside and adjacent to the band edge. Beyond the 1 MHz band from the band edge, RBW=1MHz was used.
RBW is set to 51 kHz, VBW is set to 160 kHz for LTE Band 7/38 (5MHz).
RBW is set to 100 kHz, VBW is set to 300kHz for LTE Band 7/38 (10MHz).
RBW is set to 150 kHz, VBW is set to 510 kHz for LTE Band 7/38 (15MHz).
RBW is set to 200 kHz, VBW is set to 620 kHz for LTE Band 7/38 (20MHz) on spectrum analyzer.
4. Set spectrum analyzer with RMS detector.
5. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.
6. Checked that all the results comply with the emission limit line.

Test Setup

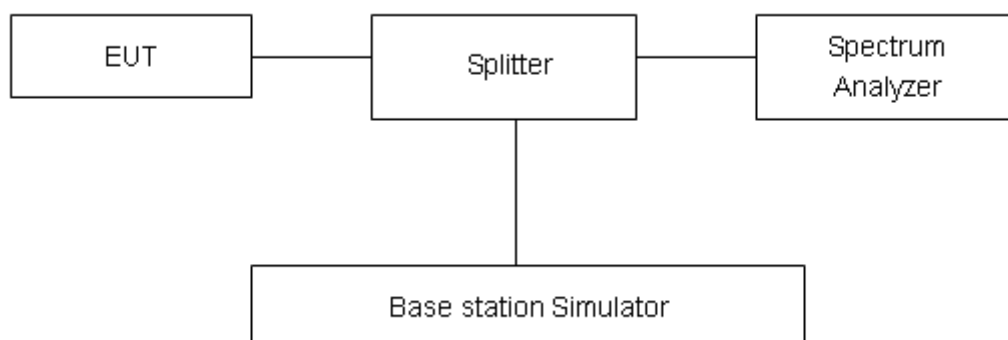

Limits

Part 27.53(m) (4)/ specifies that “for BRS and EBS stations. For mobile digital stations, the attenuation factor shall be not less than $40 + 10 \log (P)$ dB on all frequencies between the channel edge and 5 megahertz from the channel edge, $43 + 10 \log (P)$ dB on all frequencies between 5 megahertz and X megahertz from the channel edge, and $55 + 10 \log (P)$ dB on all frequencies more than X megahertz from the channel edge, where X is the greater of 6 megahertz or the actual emission bandwidth as defined in paragraph (m)(4) of this section. In addition, the attenuation factor shall not be less than $43 + 10 \log (P)$ dB on all frequencies between 2490.5 MHz and 2496 MHz and $55 + 10 \log (P)$ dB at or below 2490.5 MHz. Mobile Satellite Service licensees operating on frequencies below 2495 MHz may also submit a documented interference complaint against BRS licensees operating on channel BRS Channel 1 on the same terms and conditions as adjacent channel BRS or EBS licensees.

Example:

The limit line is derived from $43 + 10 \log (P)$ dB below the transmitter power P(Watts)

$$= P(W) - [43 + 10 \log (P)] \text{ (dB)}$$

$$= [30 + 10 \log (P)] \text{ (dBm)} - [43 + 10 \log (P)] \text{ (dB)} = -13 \text{ dBm.}$$


Measurement Uncertainty

The assessed measurement uncertainty to ensure 95% confidence level for the normal distribution is with the coverage factor $k = 1.96$, $U = 0.684 \text{ dB}$.


Test Result

All the test traces in the plots shows the test results clearly.


LTE Band 7 QPSK 5MHz CH-Low, RB 1

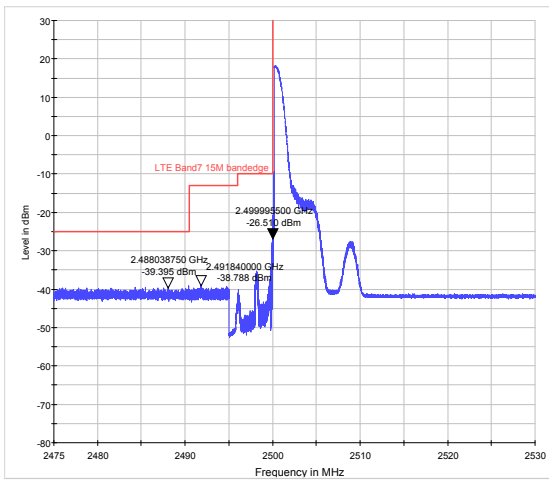


LTE Band 7 QPSK 5MHz CH-High, RB 1

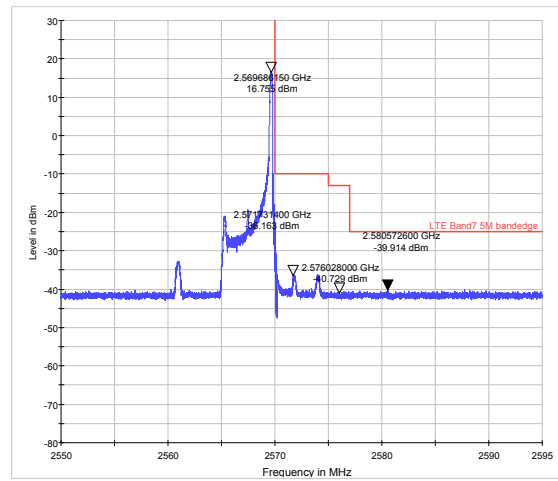


LTE Band 7 QPSK 5MHz CH-Low, RB 25

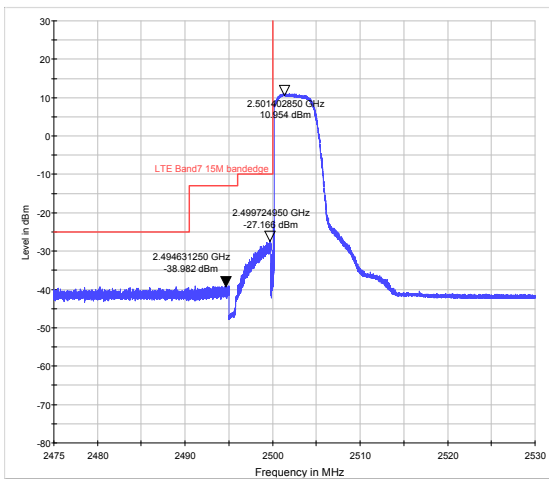


LTE Band 7 QPSK 5MHz CH-High, RB 25

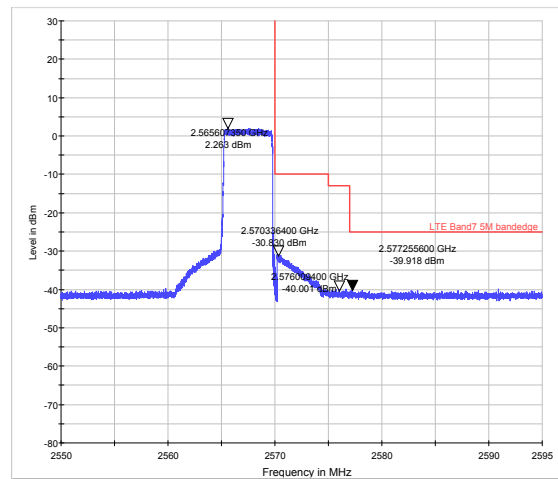

LTE Band 7 QPSK 10MHz CH-Low, RB 1

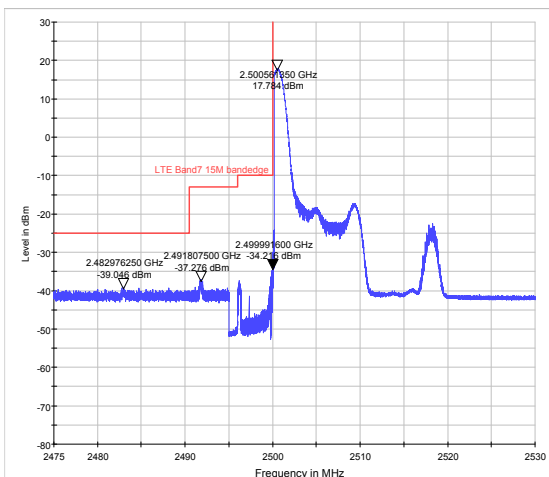


LTE Band 7 QPSK 10MHz CH-High, RB 1

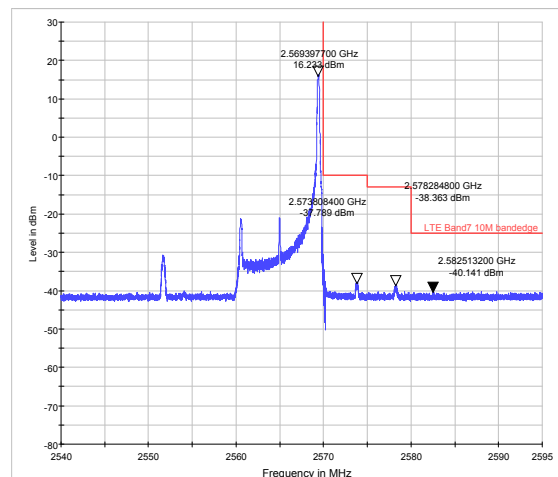





LTE Band 7 QPSK 10MHz CH-Low, RB 50

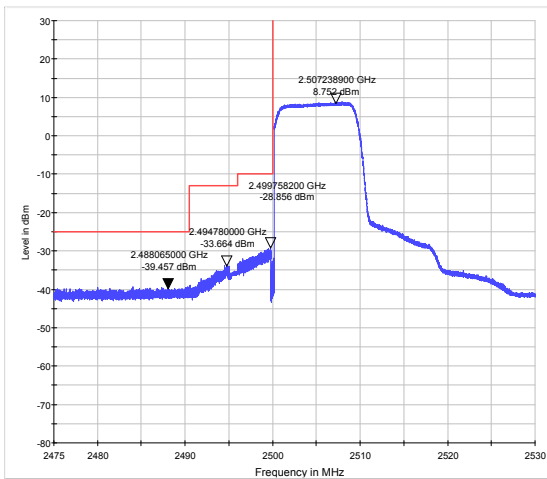


LTE Band 7 QPSK 10MHz CH-High, RB 50

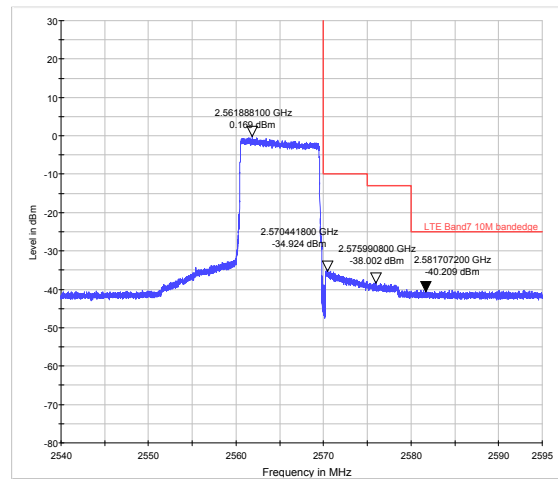


LTE Band 7 QPSK 15MHz CH-Low, RB 1

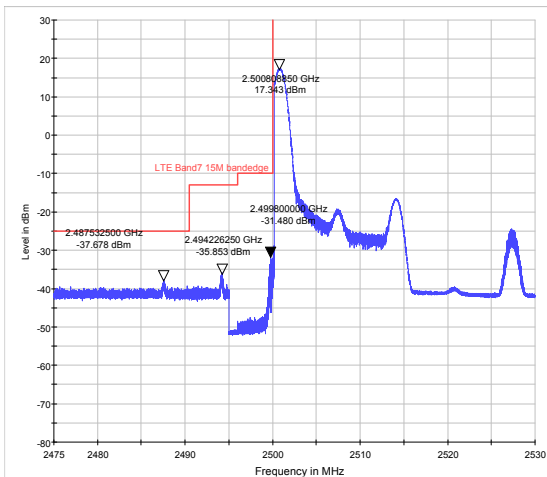


LTE Band 7 QPSK 15MHz CH-High, RB 1

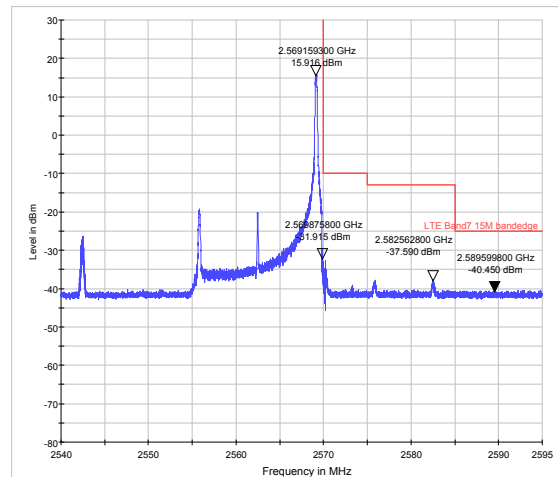

LTE Band 7 QPSK 15MHz CH-Low, RB 75

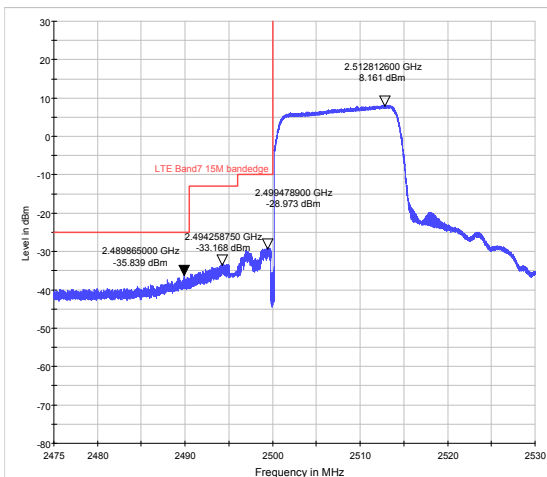


LTE Band 7 QPSK 15MHz CH-High, RB 75

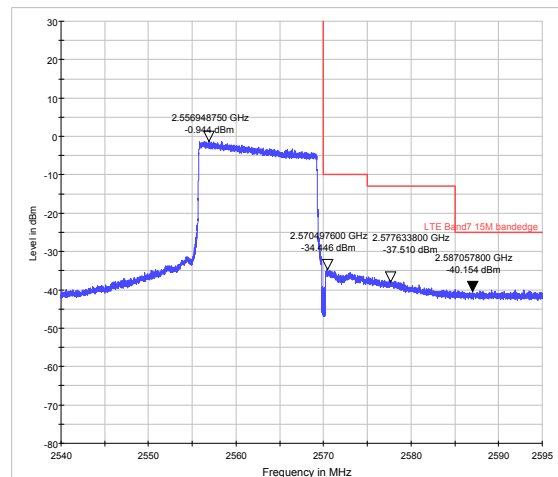





LTE Band 7 QPSK 20MHz CH-Low, RB 1

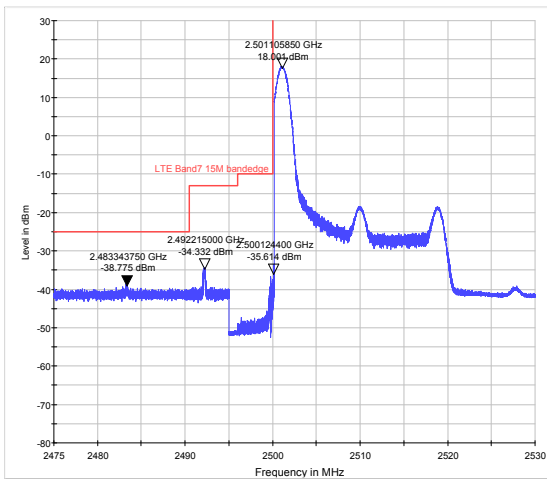


LTE Band 7 QPSK 20MHz CH-High, RB 1

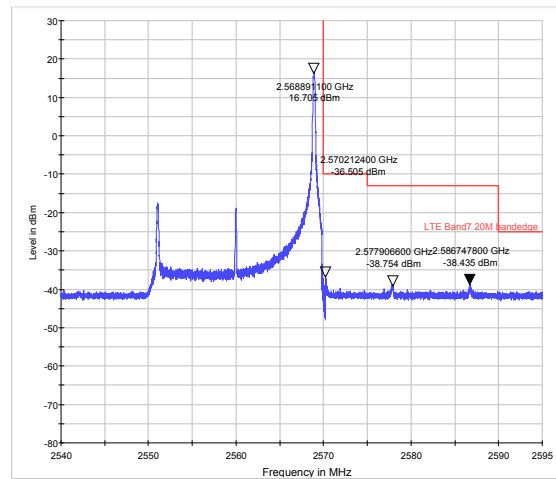


LTE Band 7 QPSK 20MHz CH-Low, RB 100

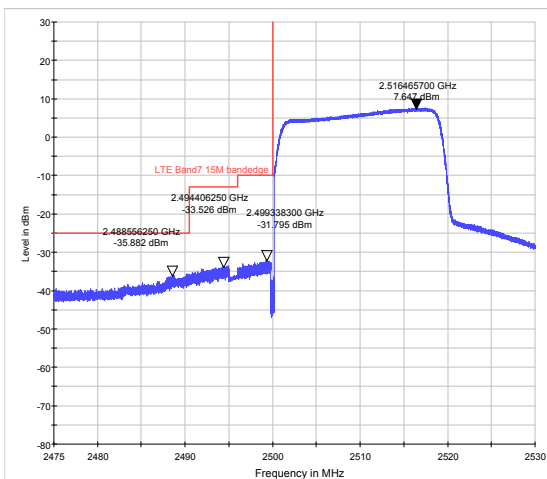


LTE Band 7 QPSK 20MHz CH-High, RB 100

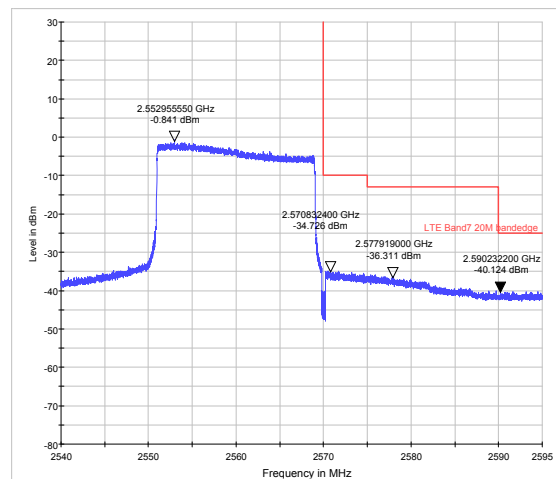

LTE Band 7 16QAM 5MHz CH-Low, RB 1

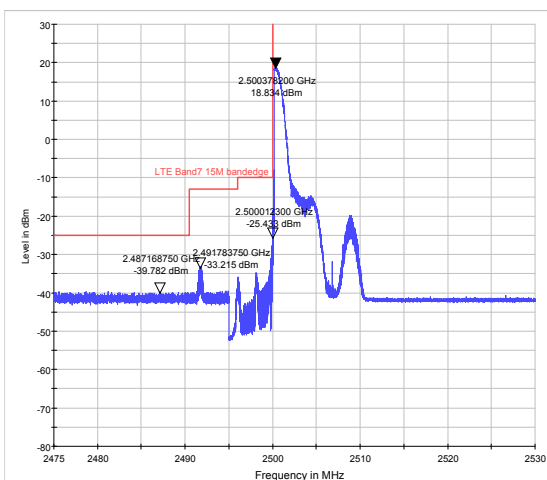


LTE Band 7 16QAM 5MHz CH-High, RB 1

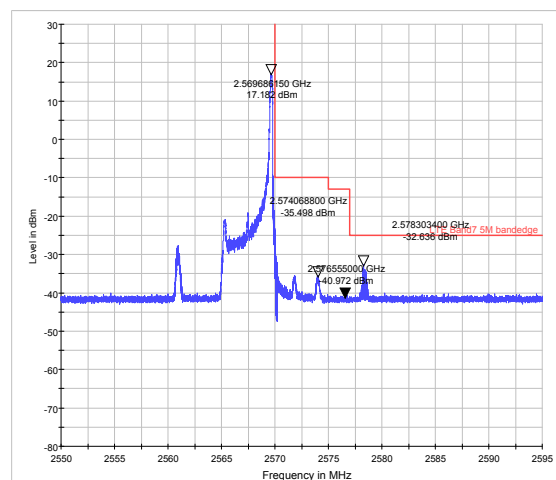





LTE Band 7 16QAM 5MHz CH-Low, RB 25

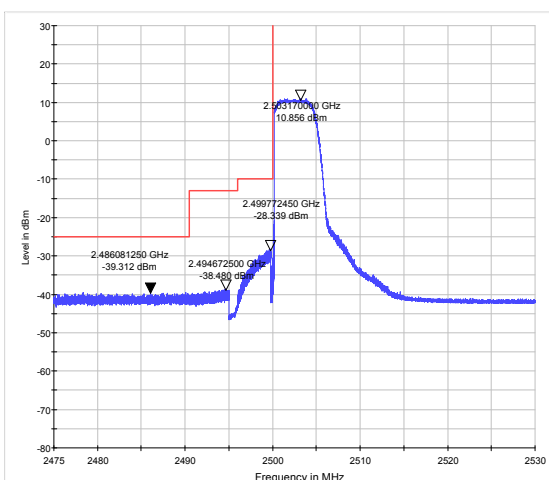


LTE Band 7 16QAM 5MHz CH-High, RB 25

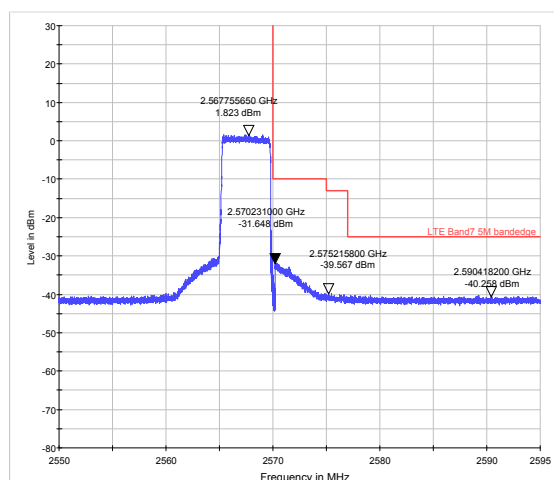


LTE Band 7 16QAM 10MHz CH-Low, RB 1

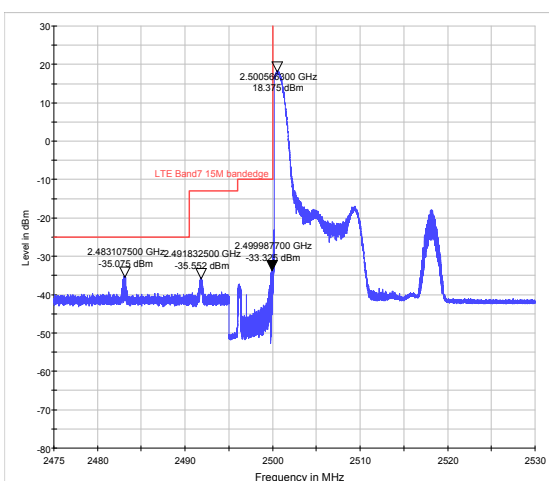


LTE Band 7 16QAM 10MHz CH-High, RB 1

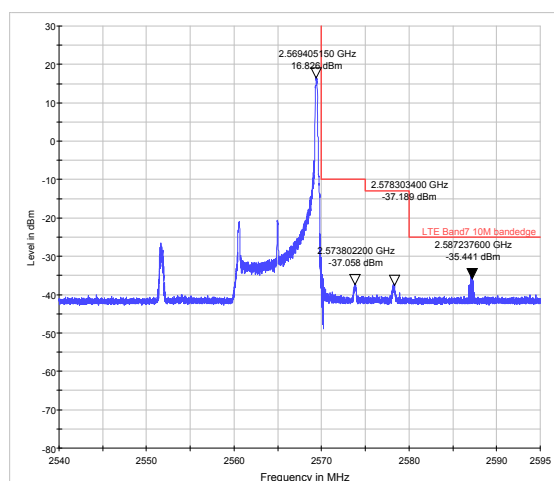

LTE Band 7 16QAM 10MHz CH-Low, RB 50

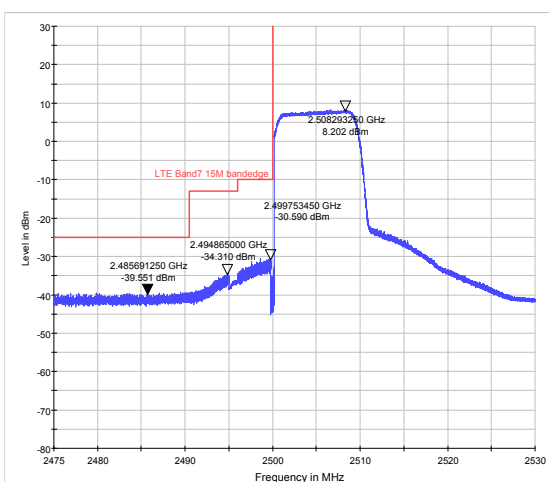


LTE Band 7 16QAM 10MHz CH-High, RB 50

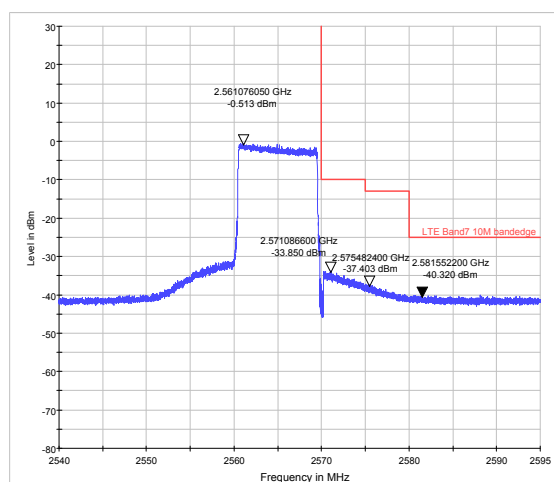





LTE Band 7 16QAM 15MHz CH-Low, RB 1

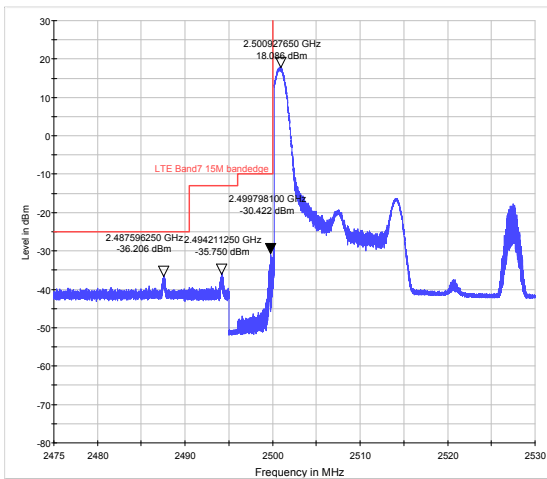


LTE Band 7 16QAM 15MHz CH-High, RB 1

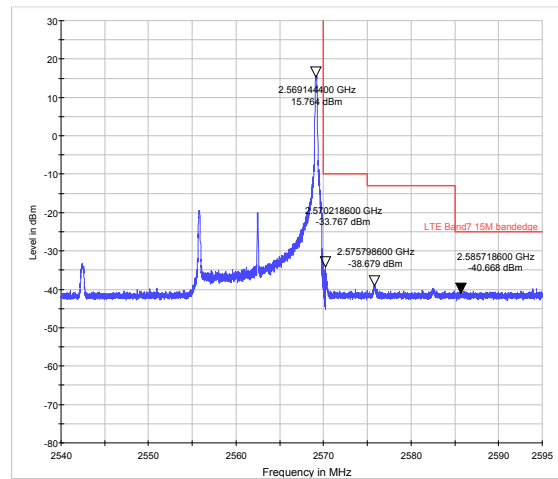


LTE Band 7 16QAM 15MHz CH-Low, RB 75

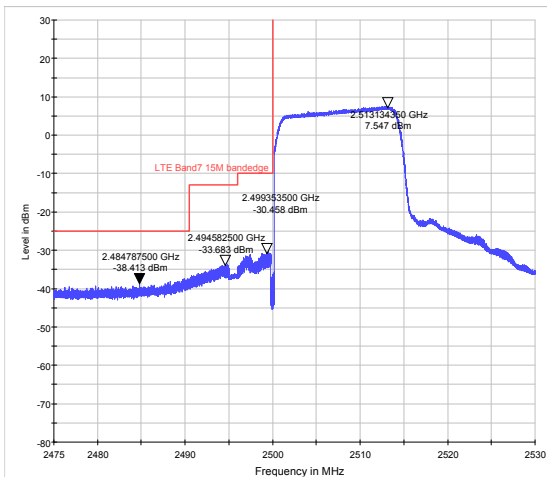


LTE Band 7 16QAM 15MHz CH-High, RB 75

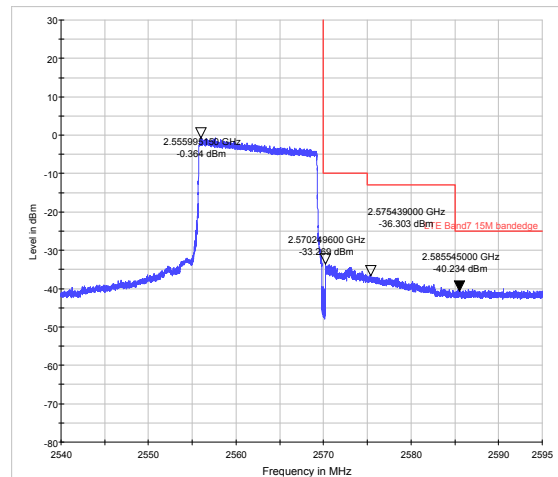

LTE Band 7 16QAM 20MHz CH-Low, RB 1

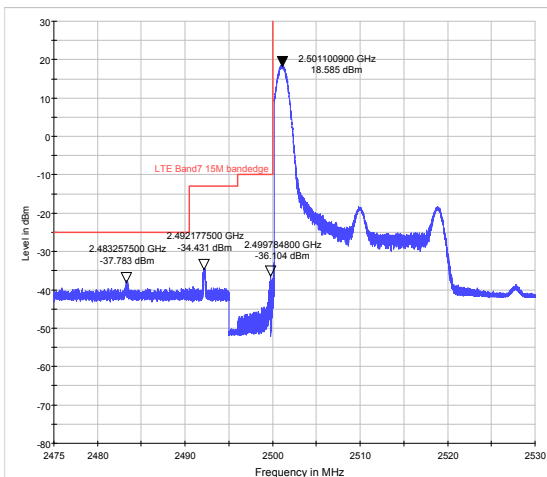


LTE Band 7 16QAM 20MHz CH-High, RB 1

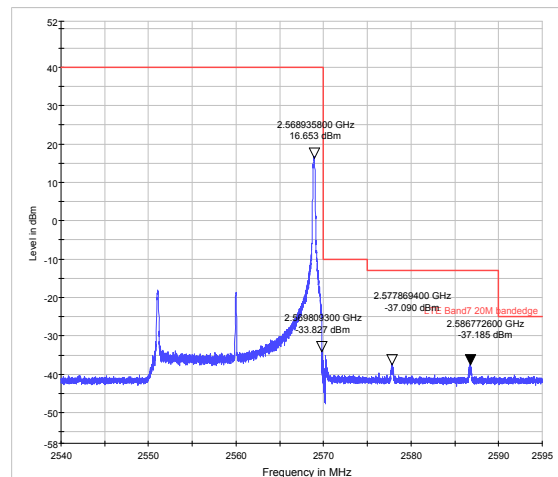





LTE Band 7 16QAM 20MHz CH-Low, RB 100

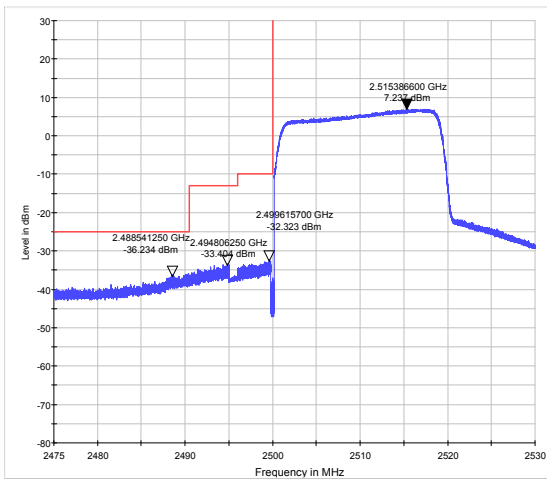


LTE Band 7 16QAM 20MHz CH-High, RB 100

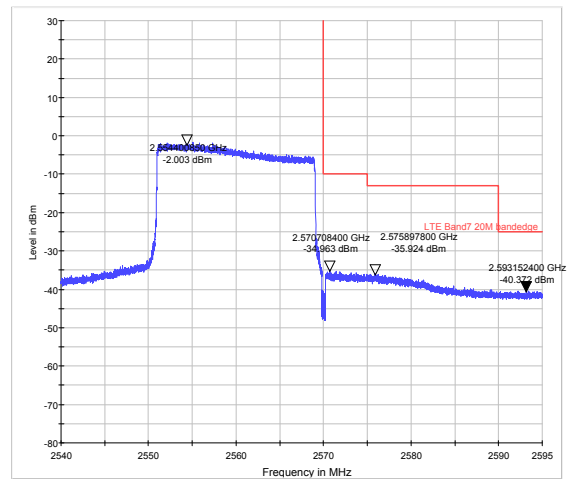


LTE Band 38 QPSK 5MHz CH-Low, RB 1

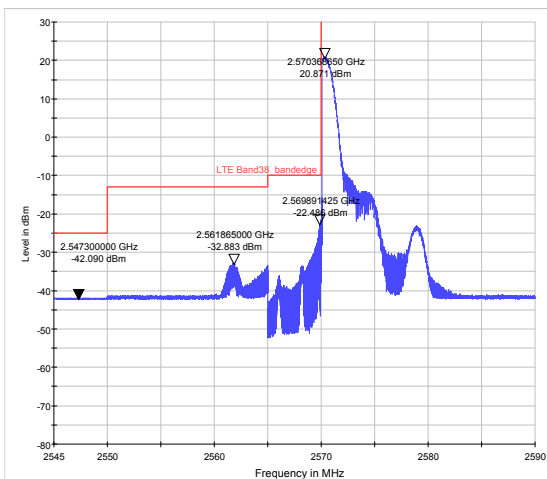


LTE Band 38 QPSK 5MHz CH-High, RB 1

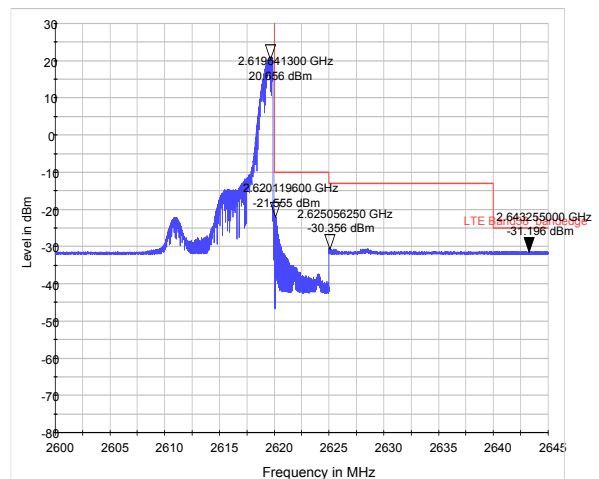

LTE Band 38 QPSK 5MHz CH-Low, RB 25

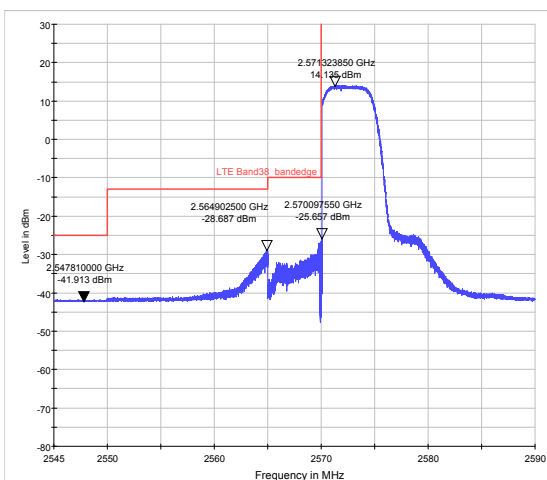


LTE Band 38 QPSK 5MHz CH-High, RB 25

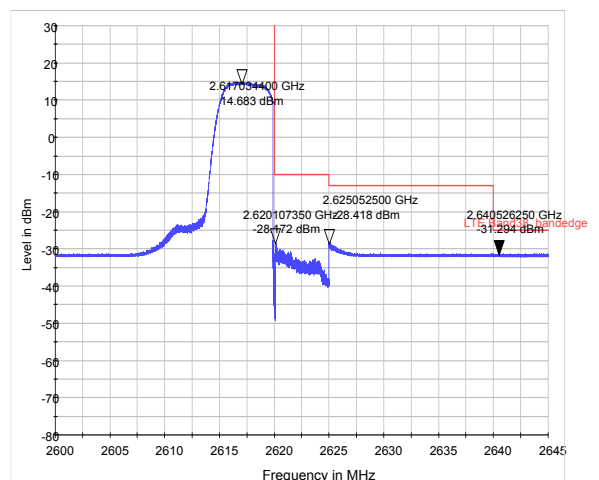





LTE Band 38 QPSK 10MHz CH-Low, RB 1

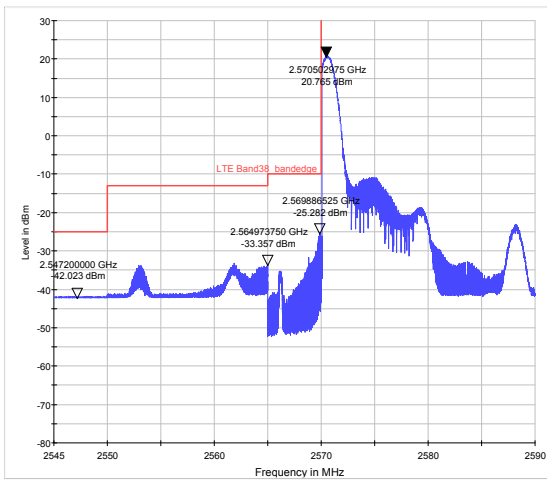


LTE Band 38 QPSK 10MHz CH-High, RB 1

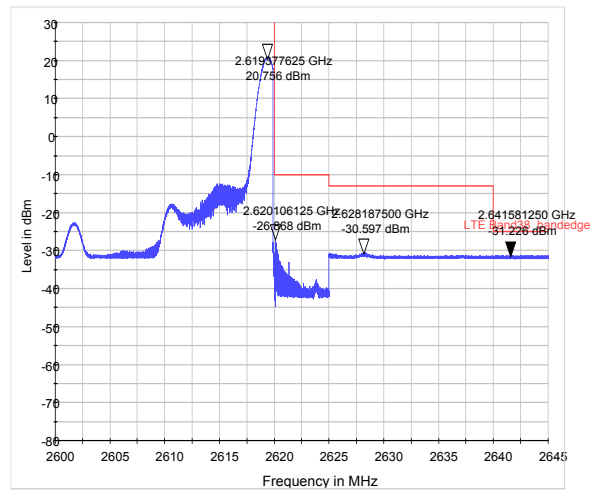


LTE Band 38 QPSK 10MHz CH-Low, RB 50

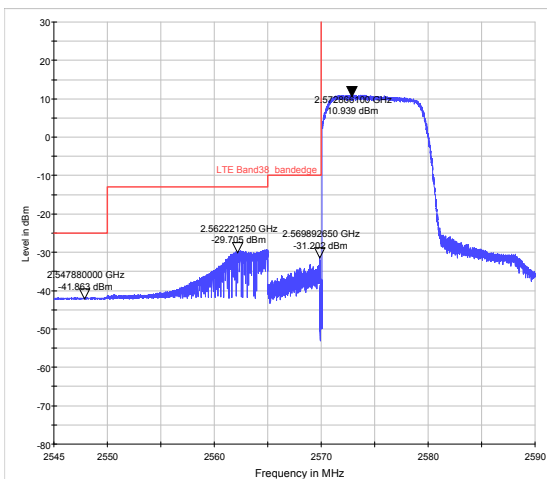


LTE Band 38 QPSK 10MHz CH-High, RB 50

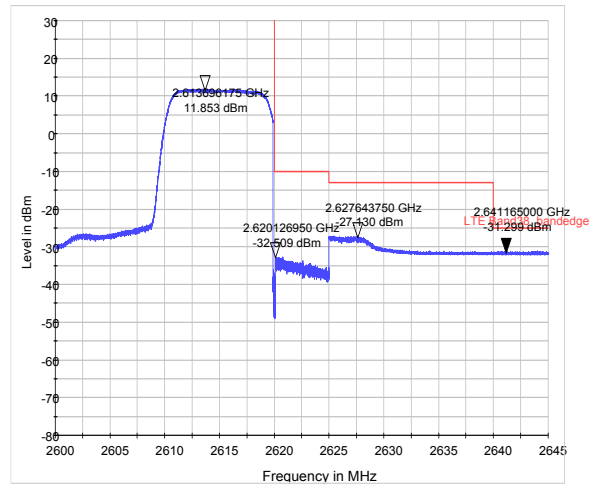

LTE Band 38 QPSK 15MHz CH-Low, RB 1

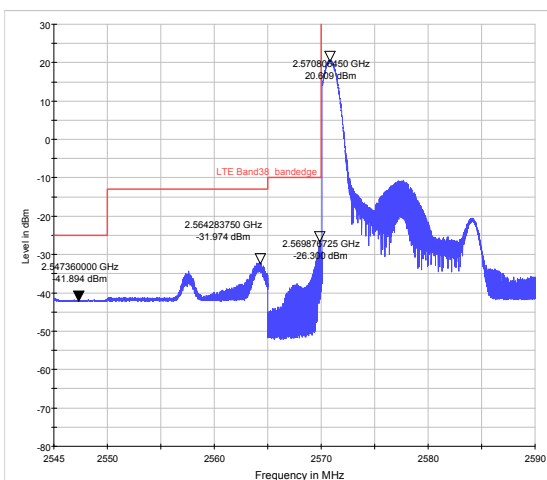


LTE Band 38 QPSK 15MHz CH-High, RB 1

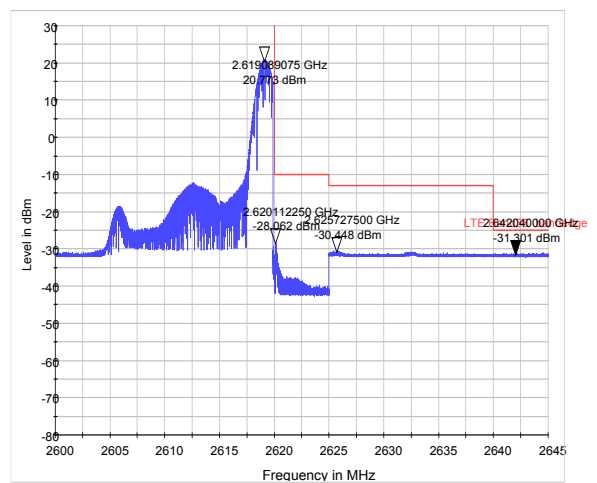





LTE Band 38 QPSK 15MHz CH-Low, RB 75

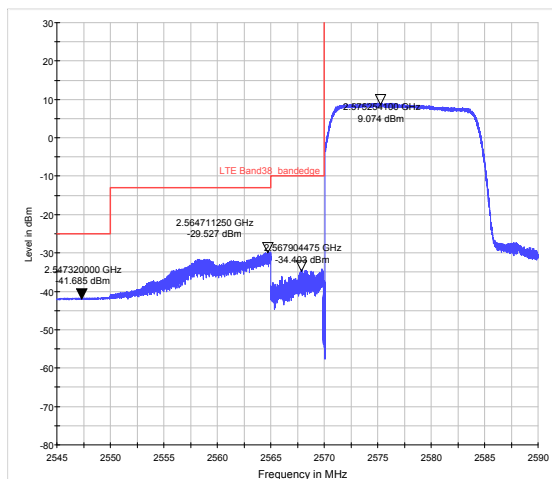


LTE Band 38 QPSK 15MHz CH-High, RB 75

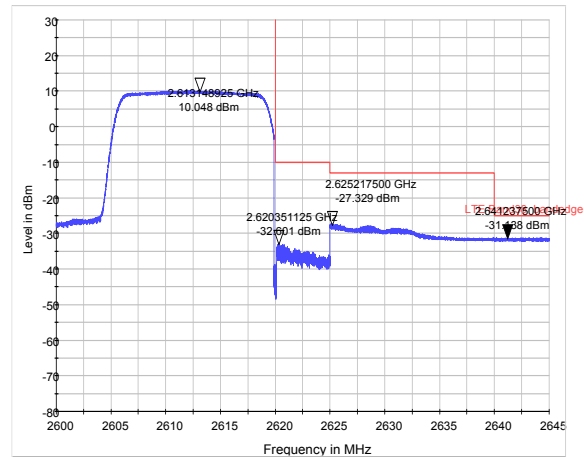


LTE Band 38 QPSK 20MHz CH-Low, RB 1

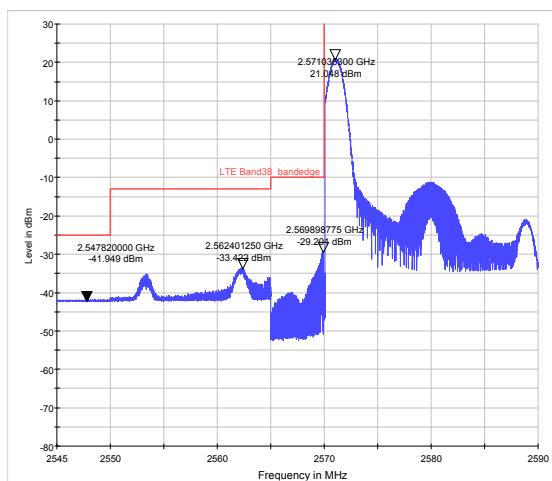


LTE Band 38 QPSK 20MHz CH-High, RB 1

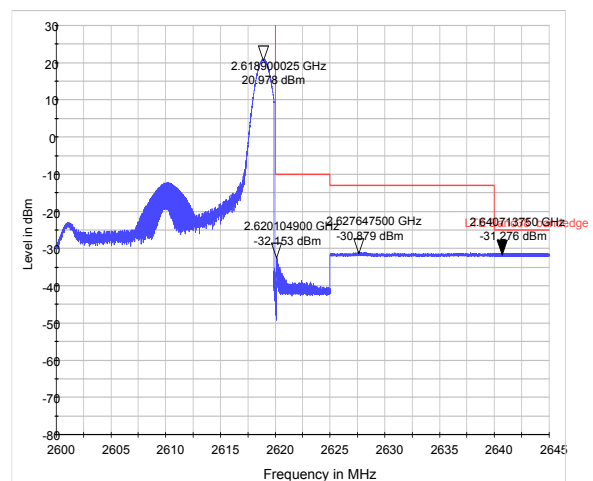

LTE Band 38 QPSK 20MHz CH-Low, RB 100

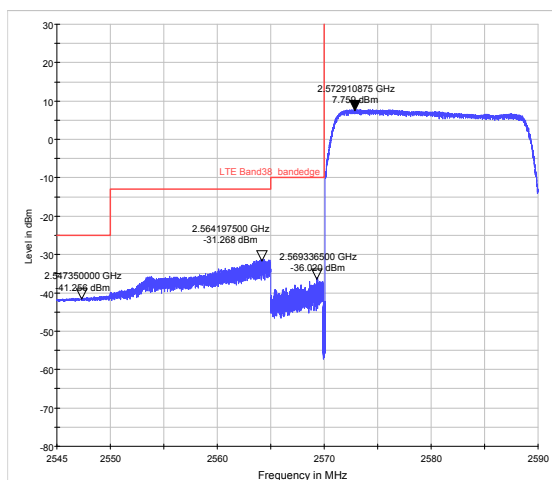


LTE Band 38 QPSK 20MHz CH-High, RB 100

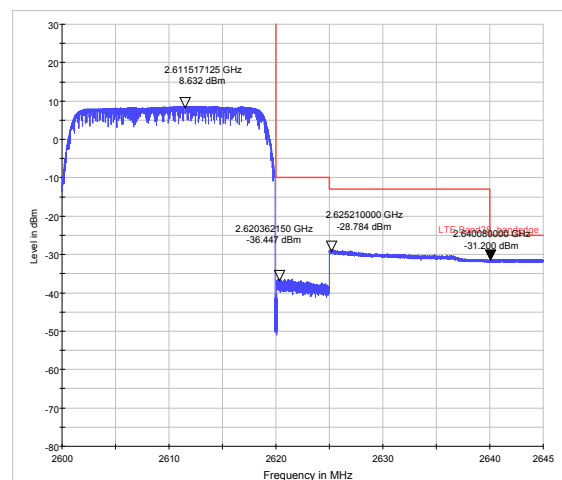





LTE Band 38 16QAM 5MHz CH-Low, RB 1

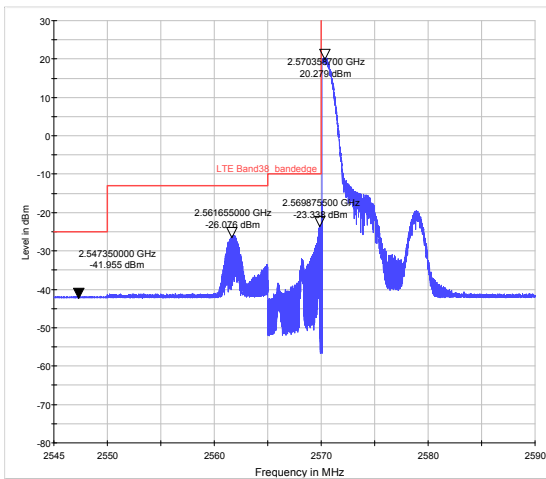


LTE Band 38 16QAM 5MHz CH-High, RB 1

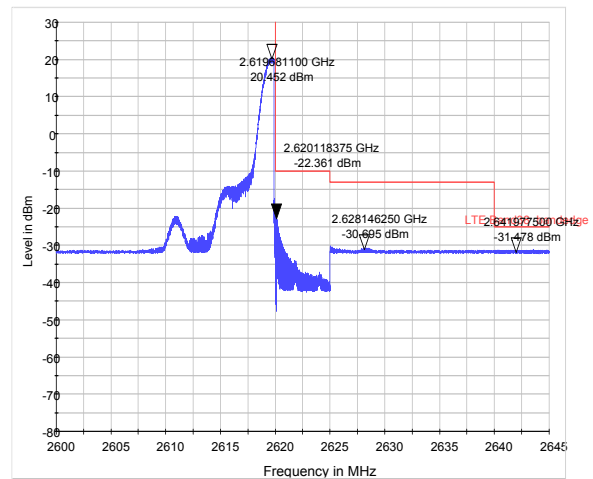


LTE Band 38 16QAM 5MHz CH-Low, RB 25

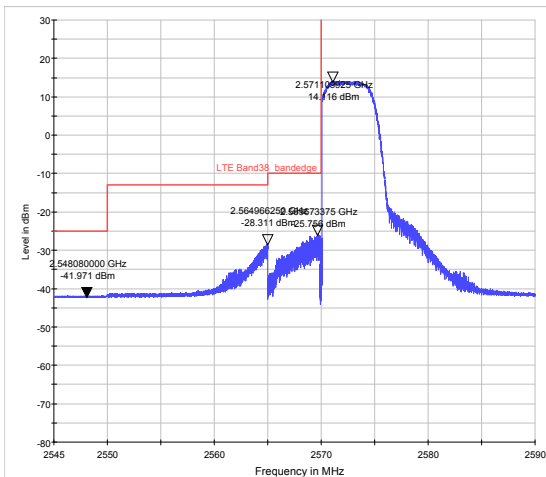


LTE Band 38 16QAM 5MHz CH-High, RB 25

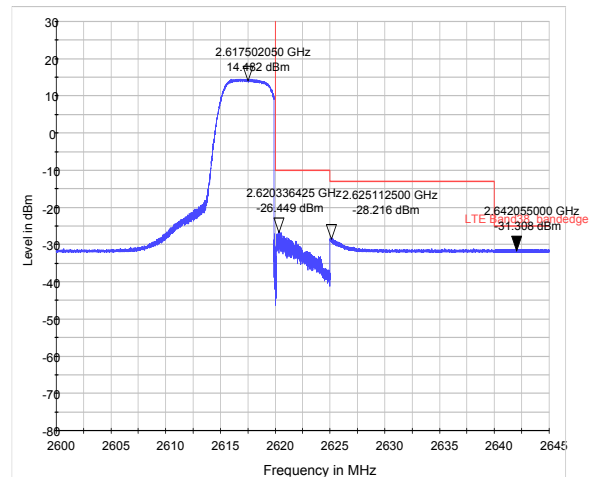

LTE Band 38 16QAM 10MHz CH-Low, RB 1

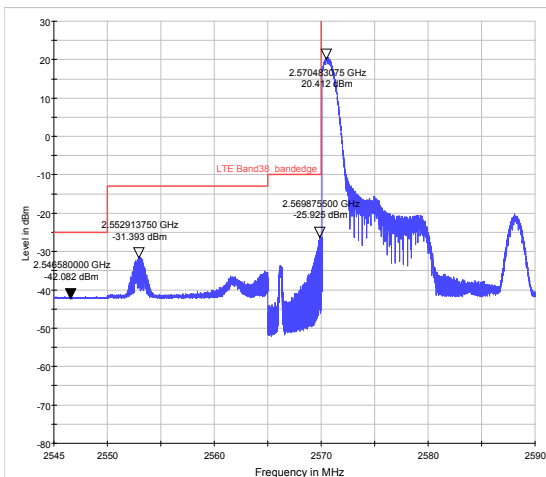


LTE Band 38 16QAM 10MHz CH-High, RB 1

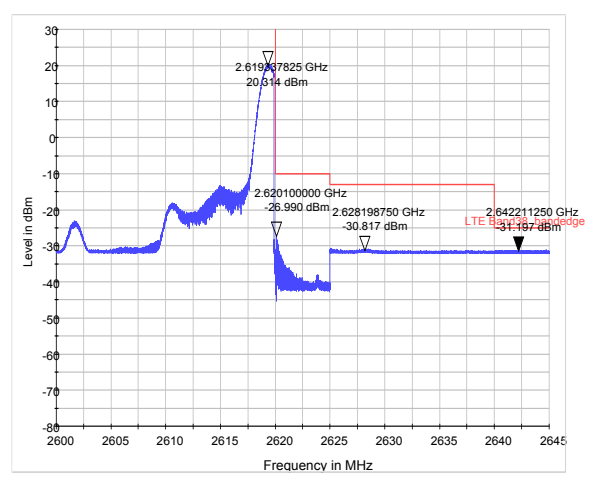





LTE Band 38 16QAM 10MHz CH-Low, RB 50

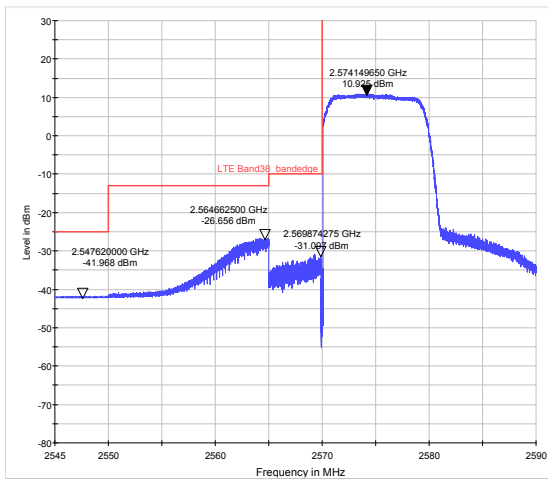


LTE Band 38 16QAM 10MHz CH-High, RB 50

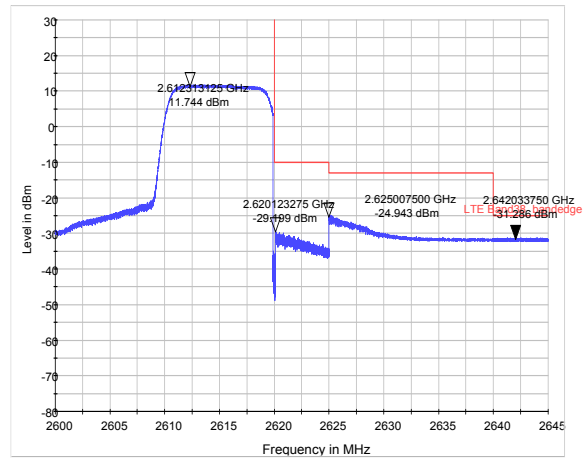


LTE Band 38 16QAM 15MHz CH-Low, RB 1

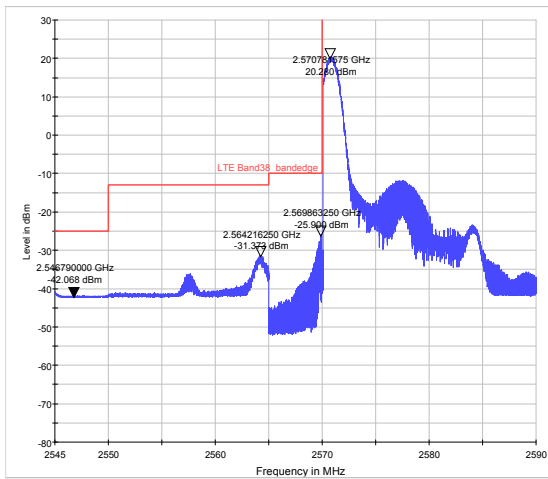


LTE Band 38 16QAM 15MHz CH-High, RB 1

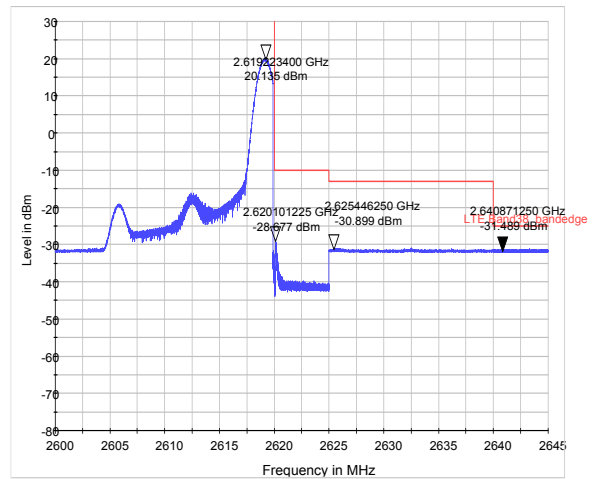

LTE Band 38 16QAM 15MHz CH-Low, RB 75

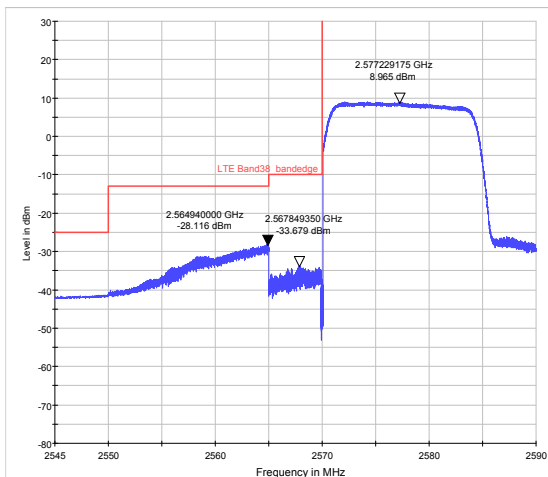


LTE Band 38 16QAM 15MHz CH-High, RB 75

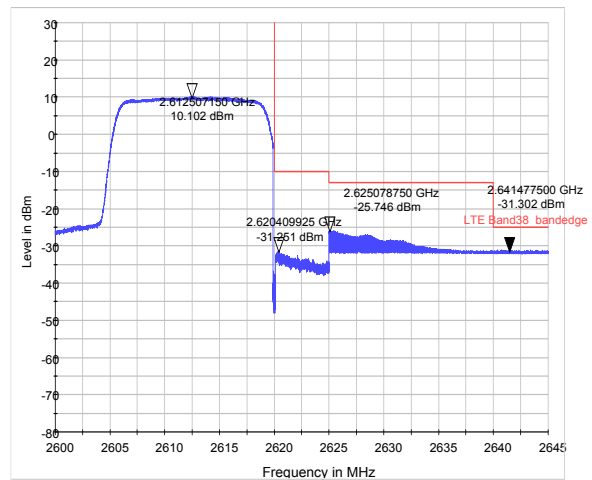





LTE Band 38 16QAM 20MHz CH-Low, RB 1

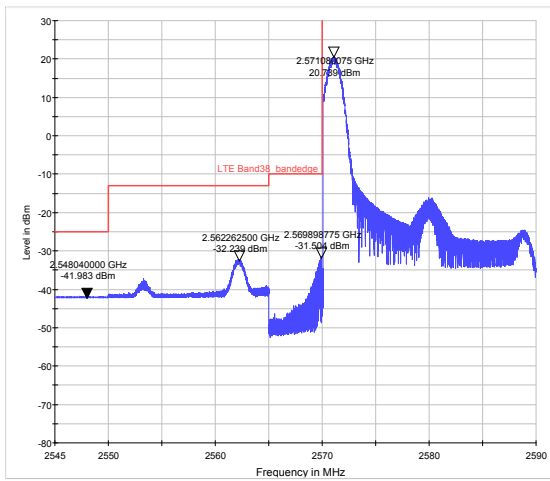


LTE Band 38 16QAM 20MHz CH-High, RB 1

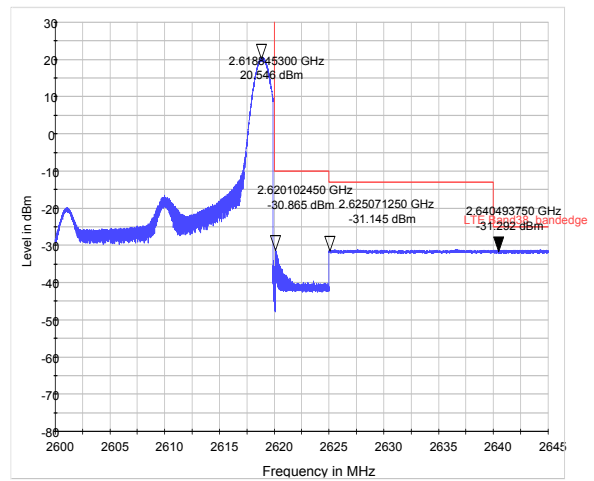

LTE Band 38 16QAM 20MHz CH-Low, RB 100

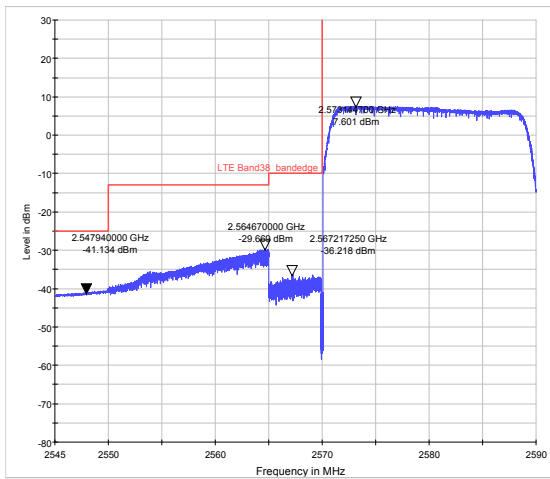

LTE Band 38 16QAM 20MHz CH-High, RB 100

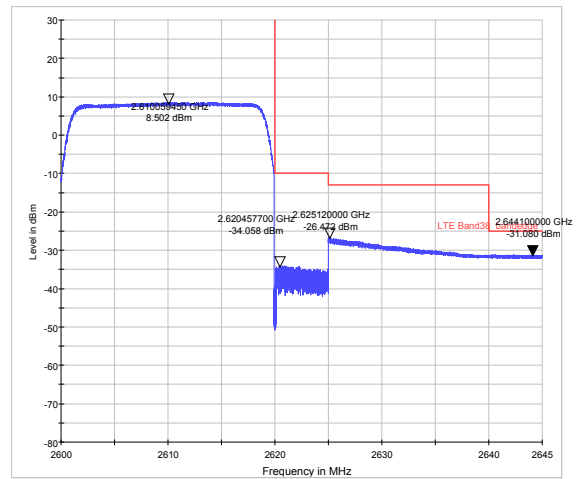

4.5 Peak-to-Average Power Ratio (PAPR)

Ambient condition


Temperature	Relative humidity	Pressure
23°C ~25°C	45%~50%	101.5kPa

Methods of Measurement

Measure the total peak power and record as PPk. And measure the total average power and record as PAvg. Both the peak and average power levels must be expressed in the same logarithmic units (e.g., dBm). Determine the PAPR from:

$$\text{PAPR (dB)} = \text{PPk (dBm)} - \text{PAvg (dBm)}.$$

Test Setup

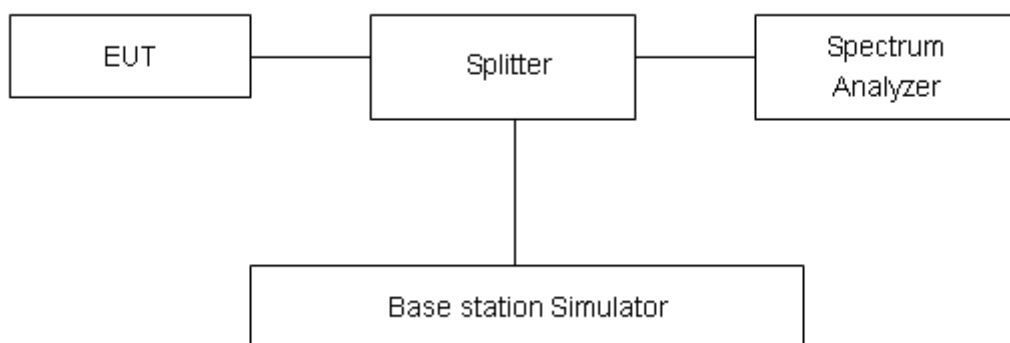

Limits

Rule Part 27.50(d)(5) Equipment employed must be authorized in accordance with the provisions of 24.51. Power measurements for transmissions by stations authorized under this section may be made either in accordance with a Commission-approved average power technique or in compliance with paragraph (d)(6) of this section. In measuring transmissions in this band using an average power technique, the peak-to-average ratio (PAR) of the transmission may not exceed 13 dB.

Measurement Uncertainty

The assessed measurement uncertainty to ensure 95% confidence level for the normal distribution is with the coverage factor $k = 2$, $U = 0.4$ dB.

Test Results

LTE Band 7								
Modulation	Bandwidth (MHz)	Channel	Frequency (MHz)	Peak (dBm)	Avg (dBm)	PAPR (dB)	Limit (dB)	Conclusion
QPSK	5	20775	2502.5	26.12	21.54	4.58	≤13	PASS
		21100	2535	26.44	21.42	5.02	≤13	PASS
		21425	2567.5	26.29	21.45	4.84	≤13	PASS
	10	20800	2505	26.21	21.62	4.59	≤13	PASS
		21100	2535	26.55	21.44	5.11	≤13	PASS
		21400	2565	26.50	21.49	5.01	≤13	PASS
	15	20825	2507.5	25.97	21.60	4.37	≤13	PASS
		21100	2535	26.50	21.40	5.10	≤13	PASS
		21375	2562.5	26.43	21.44	4.99	≤13	PASS
	20	20850	2510	26.14	21.57	4.57	≤13	PASS
		21100	2535	26.40	21.35	5.05	≤13	PASS
		21350	2560	26.15	21.40	4.75	≤13	PASS
16QAM	5	20775	2502.5	26.09	20.93	5.16	≤13	PASS
		21100	2535	25.83	20.68	5.15	≤13	PASS
		21425	2567.5	26.31	20.84	5.47	≤13	PASS
	10	20800	2505	26.08	20.96	5.12	≤13	PASS
		21100	2535	25.87	20.73	5.14	≤13	PASS
		21400	2565	26.23	20.88	5.35	≤13	PASS
	15	20825	2507.5	25.78	20.93	4.85	≤13	PASS
		21100	2535	26.13	20.68	5.45	≤13	PASS
		21375	2562.5	26.01	20.84	5.17	≤13	PASS
	20	20850	2510	26.02	20.91	5.11	≤13	PASS
		21100	2535	26.29	20.64	5.65	≤13	PASS
		21350	2560	26.23	20.81	5.42	≤13	PASS

LTE Band 38								
Modulation	Bandwidth (MHz)	Channel	Frequency (MHz)	Peak (dBm)	Avg (dBm)	PAPR (dB)	Limit (dB)	Conclusion
QPSK	5	37775	2572.5	31.49	22.09	9.40	≤13	PASS
		38000	2595	31.09	22.16	8.93	≤13	PASS
		38225	2617.5	31.13	22.23	8.90	≤13	PASS
	10	37800	2575	31.52	22.17	9.35	≤13	PASS
		38000	2595	31.41	22.18	9.23	≤13	PASS
		38200	2615	31.48	22.27	9.21	≤13	PASS
	15	37825	2577.5	32.00	22.15	9.85	≤13	PASS
		38000	2595	29.41	22.14	7.27	≤13	PASS
		38175	2612.5	31.57	22.22	9.35	≤13	PASS
	20	37850	2580	30.95	22.12	8.83	≤13	PASS
		38000	2595	31.00	22.09	8.91	≤13	PASS
		38150	2610	31.34	22.18	9.16	≤13	PASS
16QAM	5	37775	2572.5	31.12	22.12	9.00	≤13	PASS
		38000	2595	31.60	22.11	9.49	≤13	PASS
		38225	2617.5	31.65	22.12	9.53	≤13	PASS
	10	37800	2575	31.95	22.15	9.80	≤13	PASS
		38000	2595	31.59	22.16	9.43	≤13	PASS
		38200	2615	31.73	22.16	9.57	≤13	PASS
	15	37825	2577.5	32.15	22.12	10.03	≤13	PASS
		38000	2595	31.55	22.11	9.44	≤13	PASS
		38175	2612.5	31.68	22.12	9.56	≤13	PASS
	20	37850	2580	31.70	22.10	9.60	≤13	PASS
		38000	2595	31.58	22.07	9.51	≤13	PASS
		38150	2610	31.59	22.09	9.50	≤13	PASS

4.6 Frequency Stability

Ambient condition

Temperature	Relative humidity	Pressure
23°C ~25°C	45%~50%	101.5kPa

Method of Measurement

1. Frequency Stability (Temperature Variation)

The temperature inside the climate chamber is varied from -30°C to +50°C in 10°C step size.

(1)With all power removed, the temperature was decreased to -10°C and permitted to stabilize for three hours.

(2)Measure the carrier frequency with the test equipment in a “call mode”. These measurements should be made within 1 minute of powering up the mobile station, to prevent significant self warming.

(3) Repeat the above measurements at 10°C increments from -30°C to +50°C. Allow at least 1.5 hours at each temperature, un-powered, before making measurements.

2. Frequency Stability (Voltage Variation)


The frequency stability shall be measured with variation of primary supply voltage as follows:

(1) Vary primary supply voltage from 85 to 115 percent of the nominal value for other than hand carried battery equipment.

(2) For hand carried, battery powered equipment, reduce primary supply voltage to the battery-operating end point which shall be specified by the manufacturer.

This transceiver is specified to operate with an input voltage of between 3.6 V and 4.2 V, with a nominal voltage of 3.8V.

Test setup

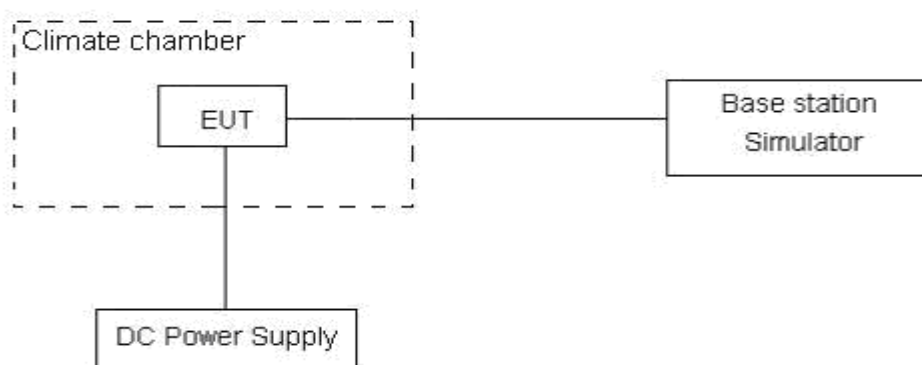

Limits

No specific frequency stability requirements in part 27.54

Measurement Uncertainty

The assessed measurement uncertainty to ensure 99.75% confidence level for the normal distribution is with the coverage factor $k = 3, U=0.01\text{ppm}$.

Test Result

Bandwidth	Test status	LTE Band 7 Channel 21100 Test Results (ppm)	
		QPSK	16QAM
5MHz	-30°C/Normal Voltage	-0.000619	-0.000907
	-20°C/Normal Voltage	0.000036	-0.000201
	-10°C/Normal Voltage	-0.000836	0.000418
	0°C/Normal Voltage	0.001049	0.000615
	10°C/Normal Voltage	-0.002414	0.000312
	20°C/Normal Voltage	-0.000075	-0.000249
	30°C/Normal Voltage	0.000797	-0.000252
	40°C/Normal Voltage	-0.000888	-0.000323
	50°C/Normal Voltage	0.000394	-0.000339
	20°C/Min Voltage	-0.000434	0.000107
	20°C/Max Voltage	0.000122	0.000174
10MHz	-30°C/Normal Voltage	-0.001274	-0.000071
	-20°C/Normal Voltage	-0.001393	0.000110
	-10°C/Normal Voltage	-0.000264	-0.000154
	0°C/Normal Voltage	-0.002521	0.000099
	10°C/Normal Voltage	-0.001389	0.000312
	20°C/Normal Voltage	0.000339	-0.000237
	30°C/Normal Voltage	-0.003065	-0.000047
	40°C/Normal Voltage	-0.001400	-0.000217
	50°C/Normal Voltage	-0.000158	0.000140
	20°C/Min Voltage	0.001519	-0.000083
	20°C/Max Voltage	-0.001700	0.000095
15MHz	-30°C/Normal Voltage	0.000761	0.000138
	-20°C/Normal Voltage	-0.000966	-0.000051
	-10°C/Normal Voltage	-0.000170	0.000091
	0°C/Normal Voltage	0.001665	0.000166
	10°C/Normal Voltage	0.000233	0.000083
	20°C/Normal Voltage	0.000260	-0.000126
	30°C/Normal Voltage	-0.000118	0.000110
	40°C/Normal Voltage	-0.000592	-0.000091
	50°C/Normal Voltage	-0.000698	-0.000091
	20°C/Min Voltage	-0.000383	0.000012
	20°C/Max Voltage	-0.001404	0.000181
20MHz	-30°C/Normal Voltage	-0.001049	0.000445
	-20°C/Normal Voltage	0.000146	0.000361
	-10°C/Normal Voltage	0.000122	-0.000347



	0°C/Normal Voltage	-0.000604	-0.000308
	10°C/Normal Voltage	-0.001077	0.000710
	20°C/Normal Voltage	-0.001440	-0.000552
	30°C/Normal Voltage	-0.000773	0.000381
	40°C/Normal Voltage	-0.001235	0.000398
	50°C/Normal Voltage	0.002363	0.000247
	20°C/Min Voltage	0.000935	-0.000939
	20°C/Max Voltage	0.000501	-0.001538

Bandwidth	Test status	LTE Band 38 Channel 38000 Test Results (ppm)	
		QPSK	16QAM
5MHz	-30°C/Normal Voltage	0.000636	0.000073
	-20°C/Normal Voltage	-0.000347	0.000054
	-10°C/Normal Voltage	0.000143	0.000455
	0°C/Normal Voltage	-0.000501	-0.000882
	10°C/Normal Voltage	0.001514	-0.000520
	20°C/Normal Voltage	0.000089	0.002035
	30°C/Normal Voltage	0.000412	0.000555
	40°C/Normal Voltage	0.000497	0.000844
	50°C/Normal Voltage	0.000913	-0.000663
	20°C/Min Voltage	-0.001461	-0.000254
	20°C/Max Voltage	0.001356	0.000239
10MHz	-30°C/Normal Voltage	0.000243	0.000304
	-20°C/Normal Voltage	-0.000809	-0.000046
	-10°C/Normal Voltage	0.000281	0.000104
	0°C/Normal Voltage	-0.000462	-0.000886
	10°C/Normal Voltage	-0.001110	0.000601
	20°C/Normal Voltage	-0.000208	-0.000316
	30°C/Normal Voltage	0.000266	-0.002023
	40°C/Normal Voltage	0.000566	0.001322
	50°C/Normal Voltage	-0.000355	0.000432
	20°C/Min Voltage	-0.001692	0.000108
	20°C/Max Voltage	-0.000732	-0.000150
15MHz	-30°C/Normal Voltage	-0.000489	0.000012
	-20°C/Normal Voltage	-0.000435	-0.000050
	-10°C/Normal Voltage	-0.001719	0.000046
	0°C/Normal Voltage	-0.001961	0.000108
	10°C/Normal Voltage	-0.001295	-0.000089
	20°C/Normal Voltage	0.000601	0.000092



	30°C/Normal Voltage	0.000112	0.000771
	40°C/Normal Voltage	0.000227	0.000066
	50°C/Normal Voltage	-0.001950	0.000297
	20°C/Min Voltage	0.000432	-0.000539
	20°C/Max Voltage	-0.000412	0.000389
20MHz	-30°C/Normal Voltage	0.000551	-0.000755
	-20°C/Normal Voltage	0.000054	-0.000944
	-10°C/Normal Voltage	0.001487	0.000254
	0°C/Normal Voltage	-0.001418	0.001484
	10°C/Normal Voltage	-0.001846	-0.001360
	20°C/Normal Voltage	-0.003025	-0.000539
	30°C/Normal Voltage	-0.001040	0.000012
	40°C/Normal Voltage	-0.000308	-0.002316
	50°C/Normal Voltage	-0.000755	0.001306
	20°C/Min Voltage	-0.001669	0.000143
	20°C/Max Voltage	-0.001206	-0.000590

4.7 Spurious Emissions at Antenna Terminals

Ambient condition


Temperature	Relative humidity	Pressure
23°C ~25°C	45%~50%	101.5kPa

Method of Measurement

The EUT was connected to Spectrum Analyzer and Base Station Simulator via power Splitter. The measurement is carried out using a spectrum analyzer. The spectrum analyzer scans from 30MHz to the 10th harmonic of the carrier. The peak detector is used. RBW and VBW are set to 100 kHz for the carrier frequency, or RBW and VBW are set to 1MHz (other frequency), Sweep is set to ATUO.

Of those disturbances below (limit – 20 dB), the mark is not required for the EUT.

Test setup

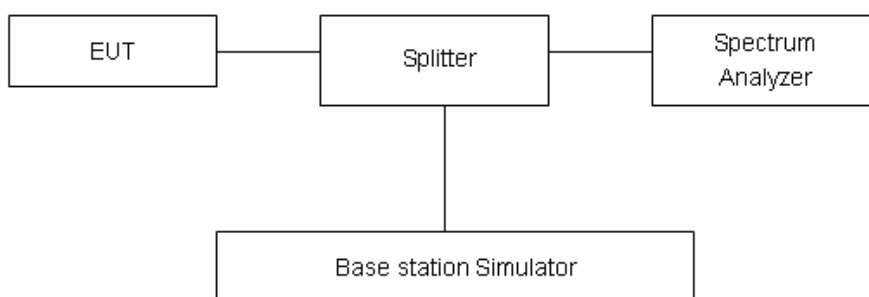

Limits

LTE -7/38 Rule Part 27.53(m) $55 + 10 \log (P)$ dB on all frequencies more than X megahertz from the channel edge, where X is the greater of 6 megahertz or the actual emission bandwidth as defined in paragraph (m)(4) of this section.

Limit	-25 dBm
-------	---------

Measurement Uncertainty


The assessed measurement uncertainty to ensure 99.75% confidence level for the normal distribution is with the coverage factor $k = 1.96$.

Frequency	Uncertainty
100kHz-2GHz	0.684 dB
2GHz-26.5GHz	1.407 dB


Test Result: PASS

If disturbances were found more than 20dB below limit line, the mark is not required for the EUT.
The signal beyond the limit is carrier in the following plots.


LTE Band 7 5MHz CH-Low 30MHz~3GHz

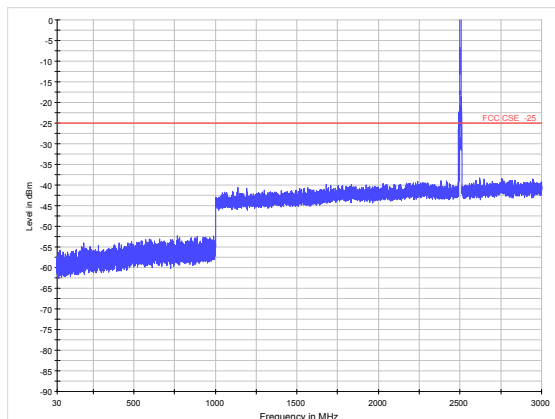


LTE Band 7 5MHz CH-Middle 30MHz~3GHz

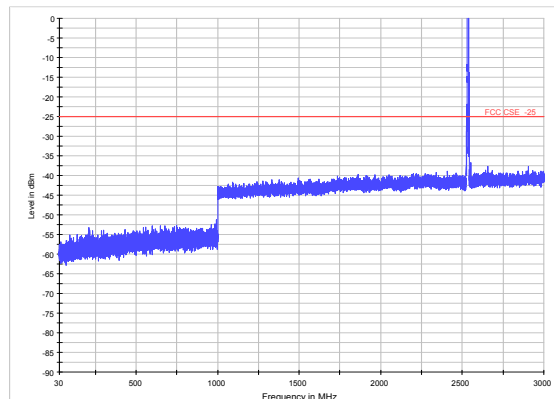


LTE Band 7 5MHz CH-Low 3GHz~18GHz

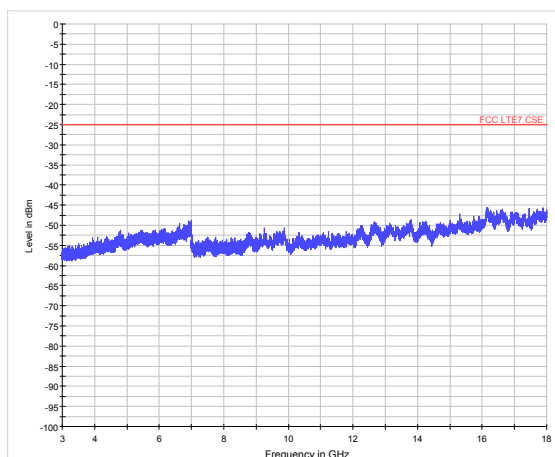


LTE Band 7 5MHz CH-Middle 3GHz~18GHz

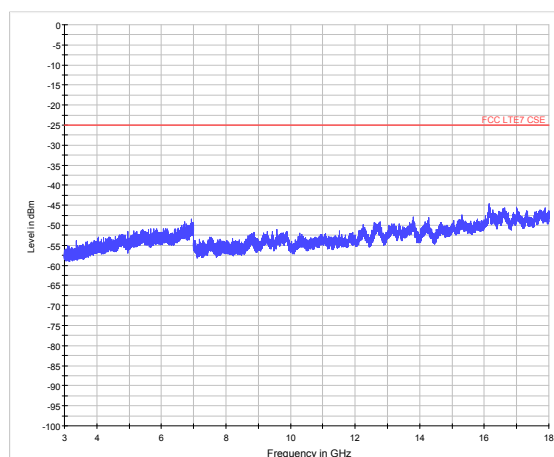

LTE Band 7 5MHz CH-Low 18GHz~26.5GHz

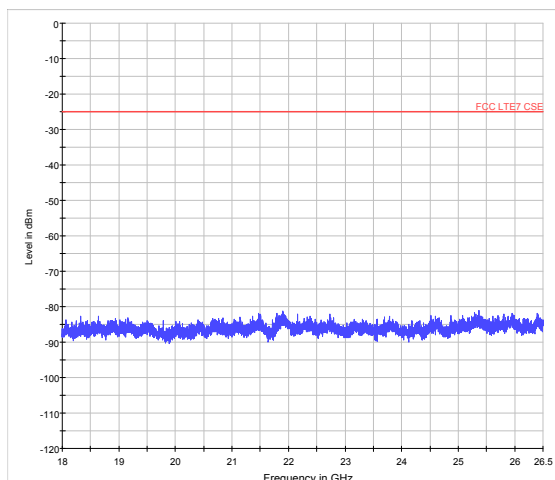


LTE Band 7 5MHz CH-Middle 18GHz~26.5GHz

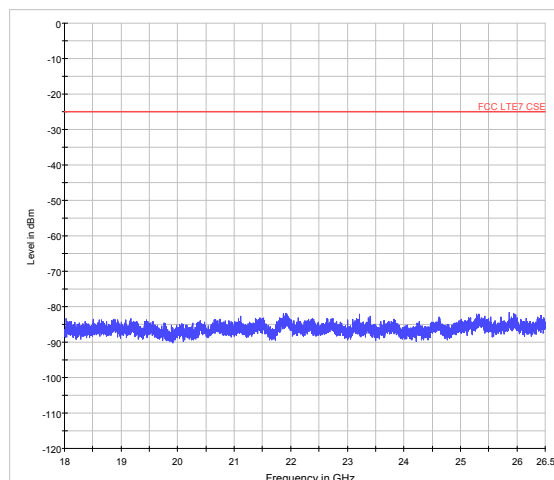





LTE Band 7 5MHz CH-High 30MHz~3GHz

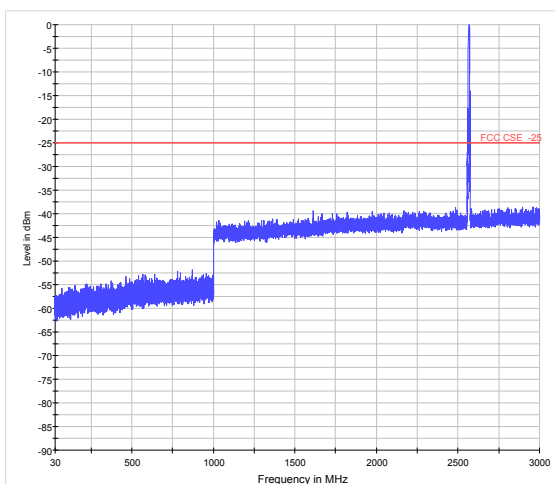


LTE Band 7 10MHz CH-Low 30MHz~3GHz

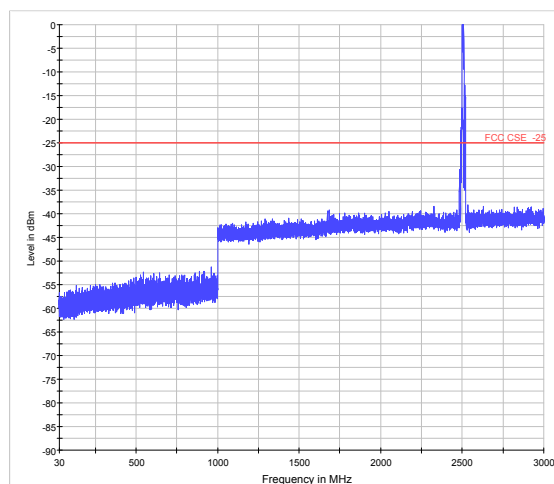


LTE Band 7 5MHz CH-High 3GHz~18GHz

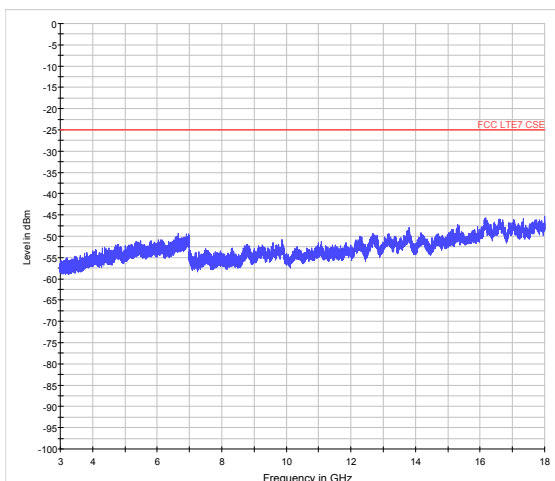


LTE Band 7 10MHz CH-Low 3GHz~18GHz

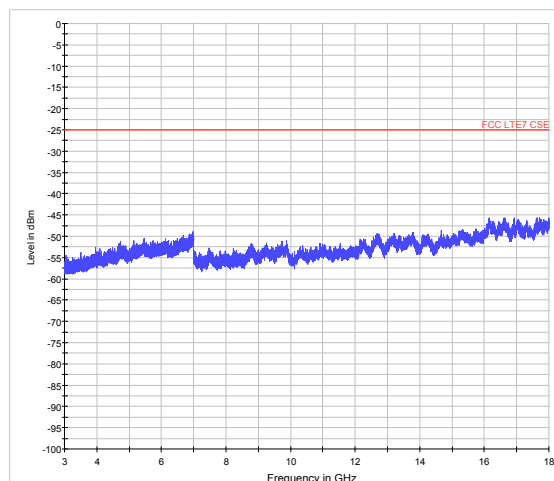

LTE Band 7 5MHz CH-High 18GHz~26.5GHz

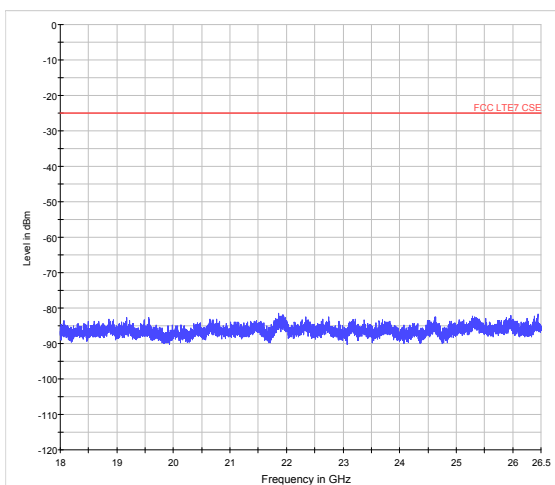


LTE Band 7 10MHz C CH-Low 18GHz~26.5GHz

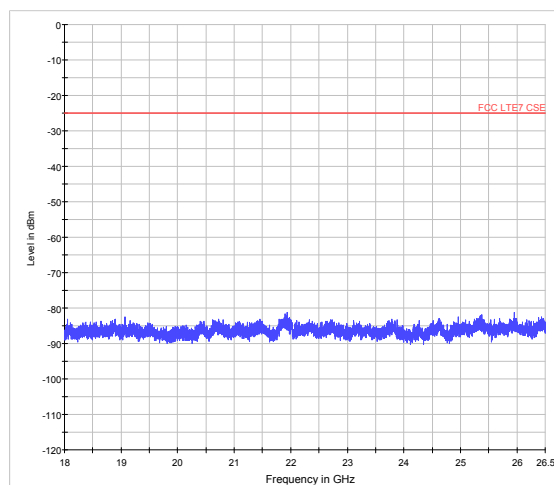





LTE Band 7 10MHz CH-Middle 30MHz~3GHz

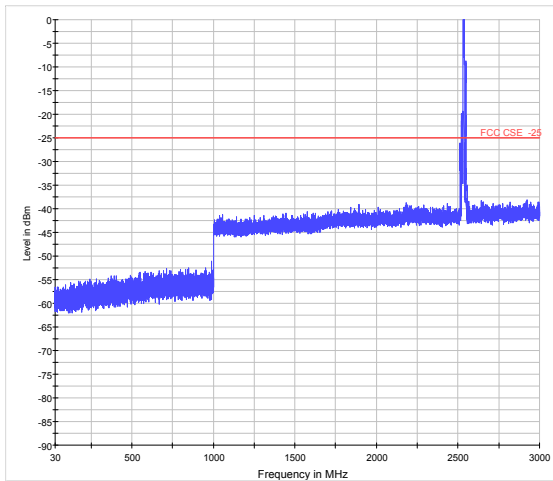


LTE Band 7 10MHz CH-High 30MHz~3GHz

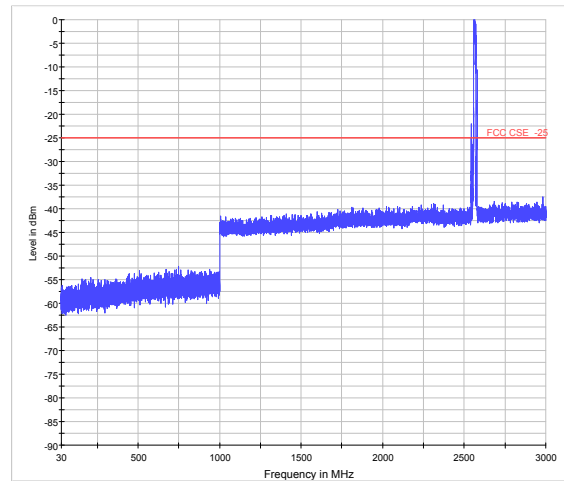


LTE Band 7 10MHz CH-Middle 3GHz~18GHz

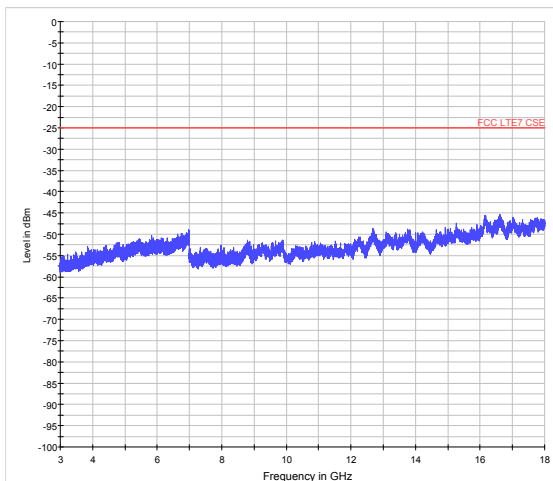


LTE Band 7 10MHz CH-High 3GHz~18GHz

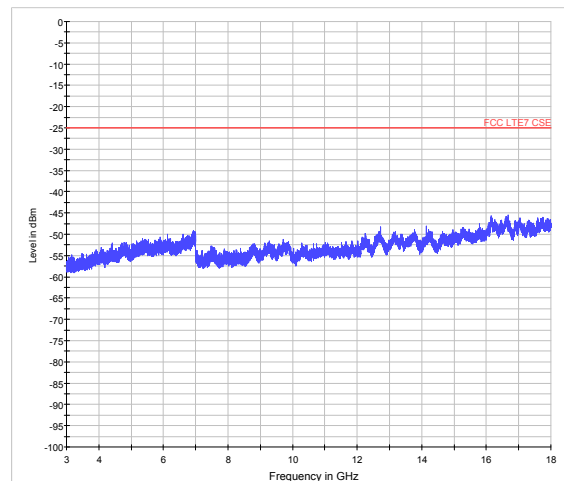

LTE Band 7 10MHz CH-Middle 18GHz~26.5GHz

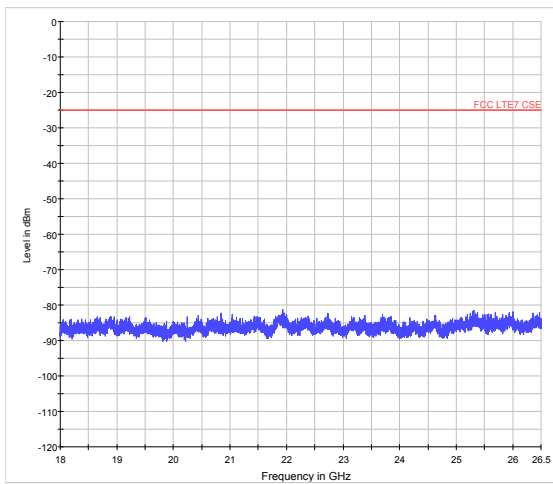


LTE Band 7 10MHz CH-High 18GHz~26.5GHz

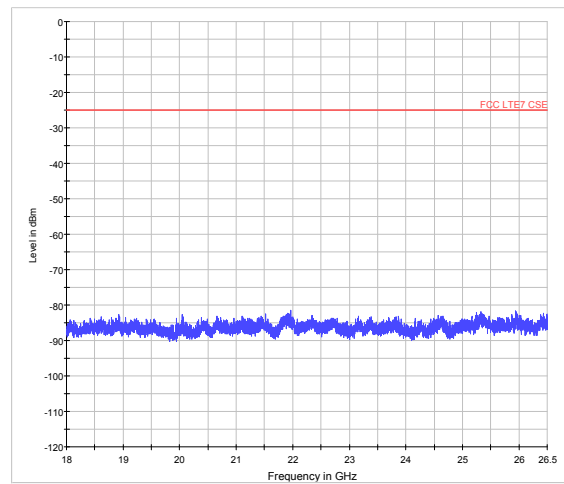





LTE Band 7 15MHz CH-Low 30MHz~3GHz

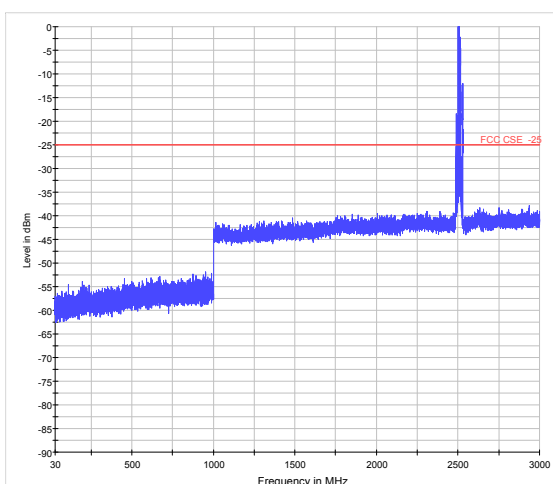


LTE Band 7 15MHz CH-Middle 30MHz~3GHz

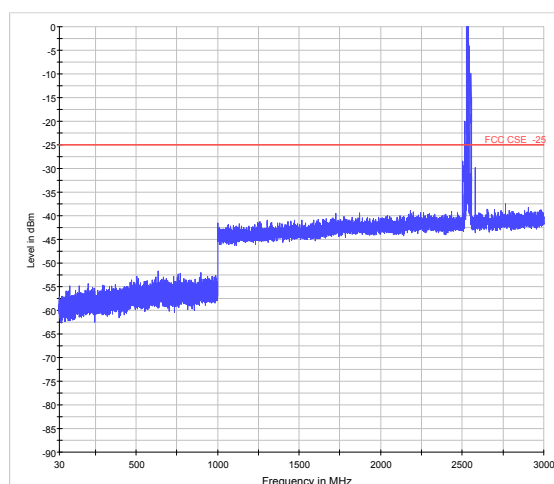


LTE Band 7 15MHz CH-Low 3GHz~18GHz

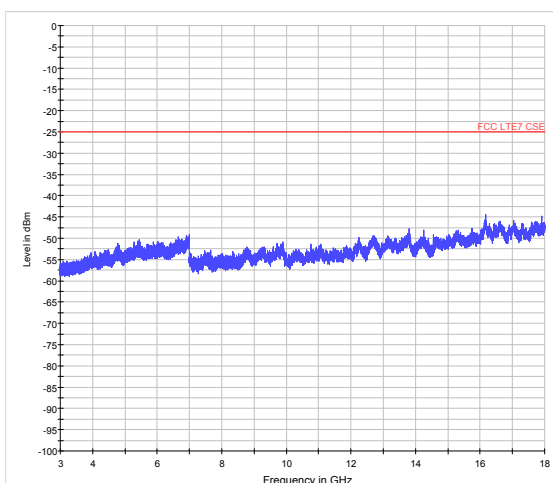


LTE Band 7 15MHz CH-Middle 3GHz~18GHz

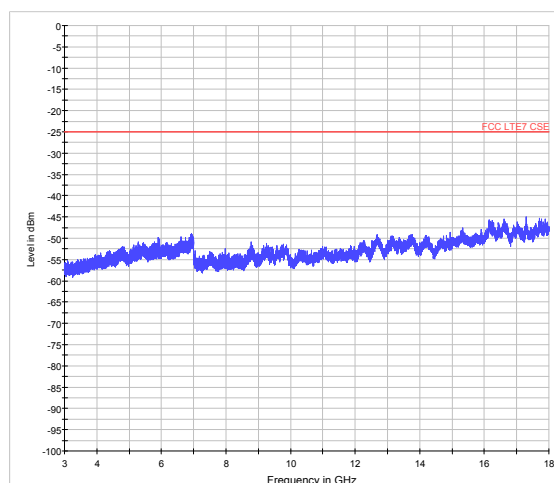


LTE Band 7 15MHz CH-Low 18GHz~26.5GHz

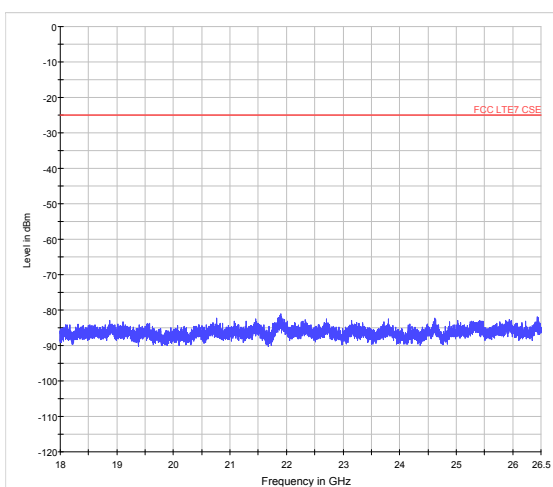


LTE Band 7 15MHz CH-Middle 18GHz~26.5GHz

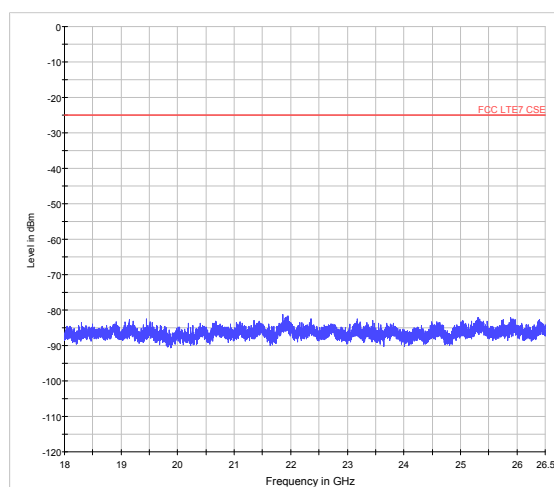


LTE Band 7 15MHz CH-High 30MHz~3GHz

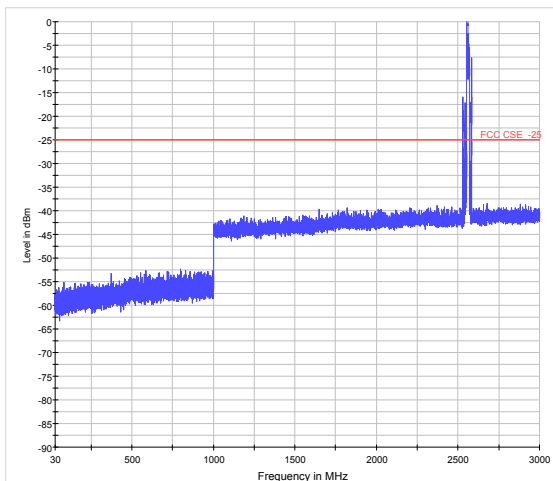


LTE Band 7 20MHz CH-Low 30MHz~3GHz

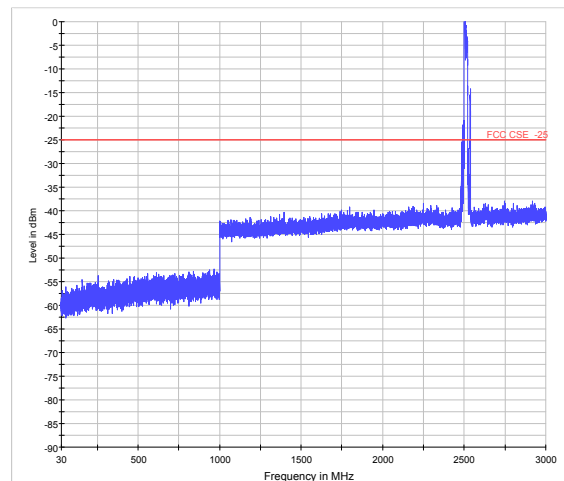


LTE Band 7 15MHz CH-High 3GHz~18GHz

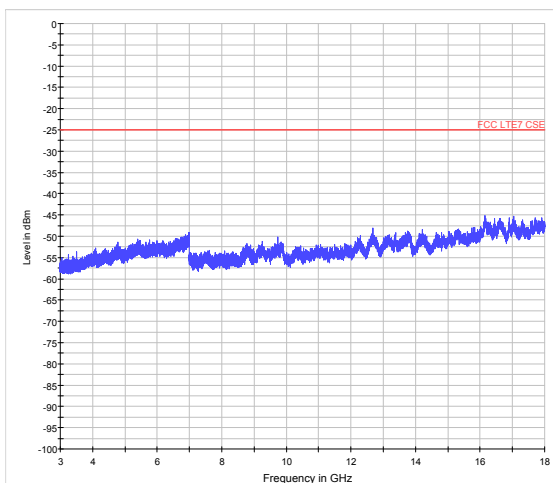


LTE Band 7 20MHz CH-Low 3GHz~18GHz

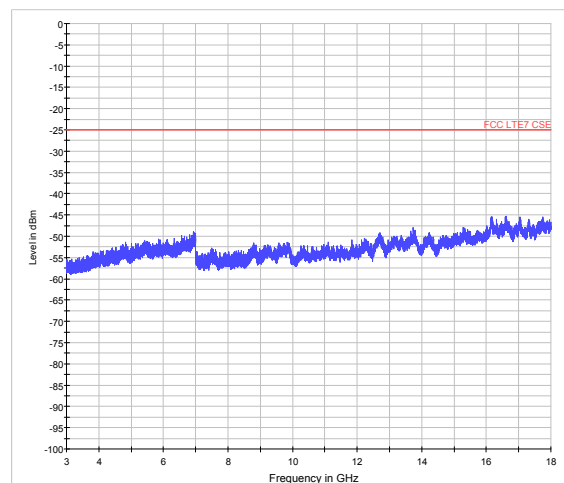

LTE Band 7 15MHz CH-High 18GHz~26.5GHz

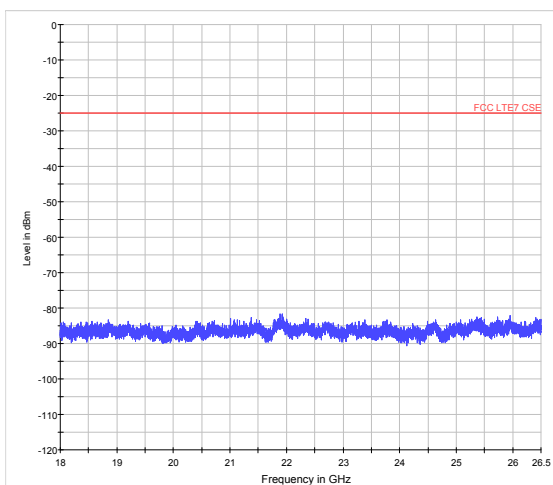


LTE Band 7 20MHz CH-Low 18GHz~26.5GHz

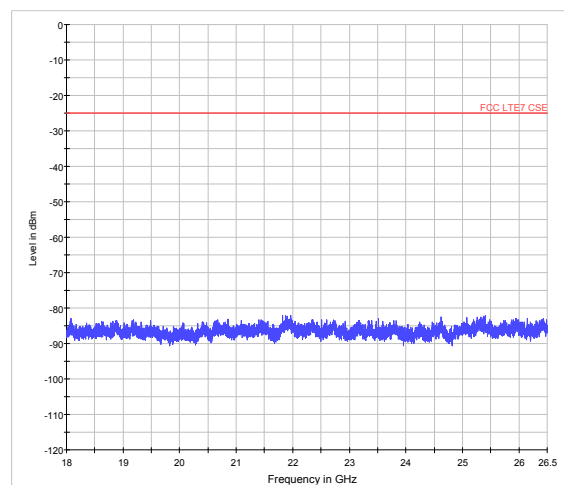





LTE Band 7 20MHz CH-Middle 30MHz~3GHz

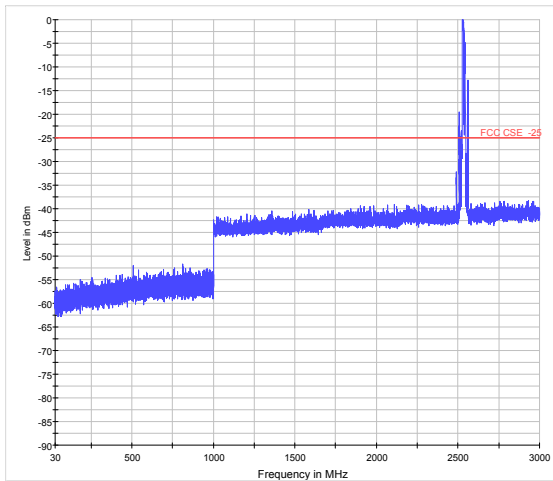


LTE Band 7 20MHz CH-High 30MHz~3GHz

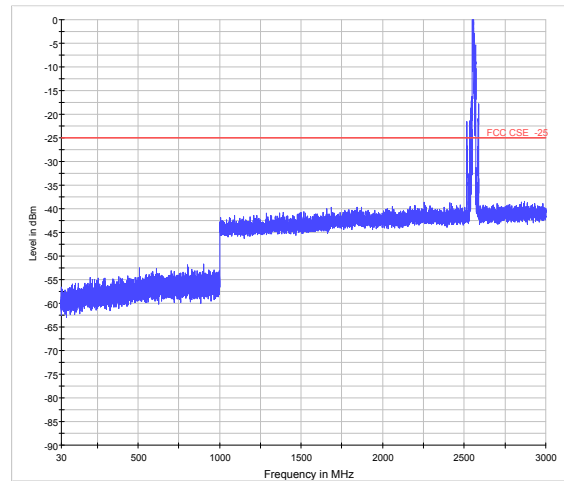


LTE Band 7 20MHz CH-Middle 3GHz~18GHz

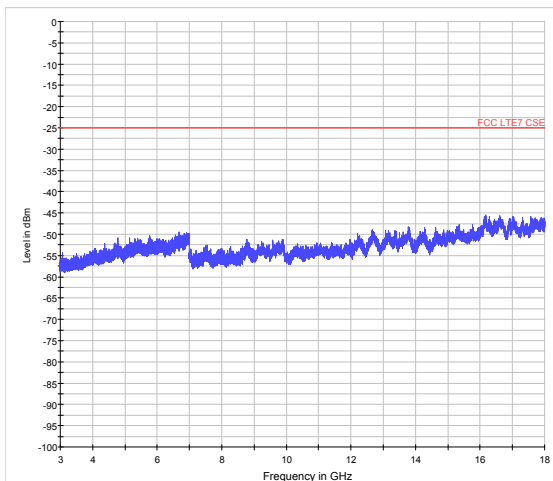


LTE Band 7 20MHz CH-High 3GHz~18GHz

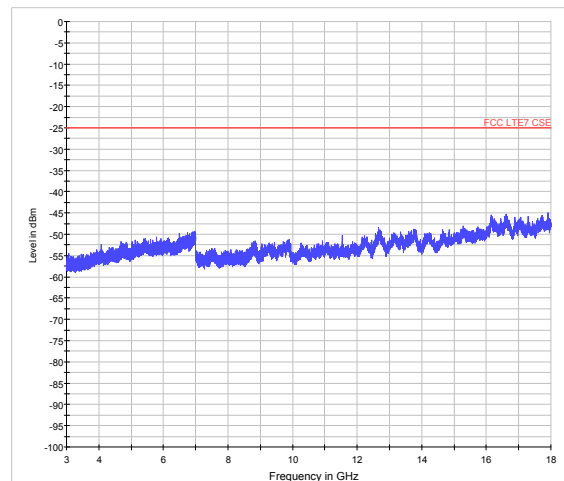

LTE Band 7 20MHz CH-Middle 18GHz~26.5GHz

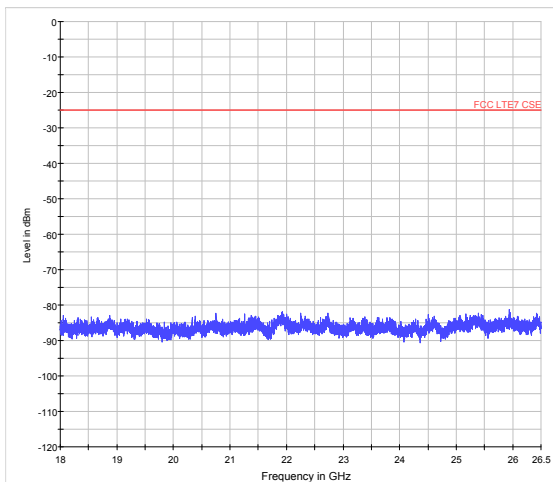


LTE Band 7 20MHz CH-High 18GHz~26.5GHz

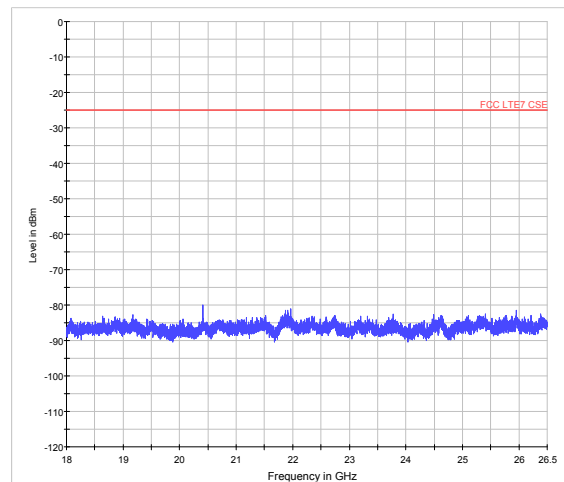





LTE Band 38 5MHz CH-Low 30MHz~3GHz

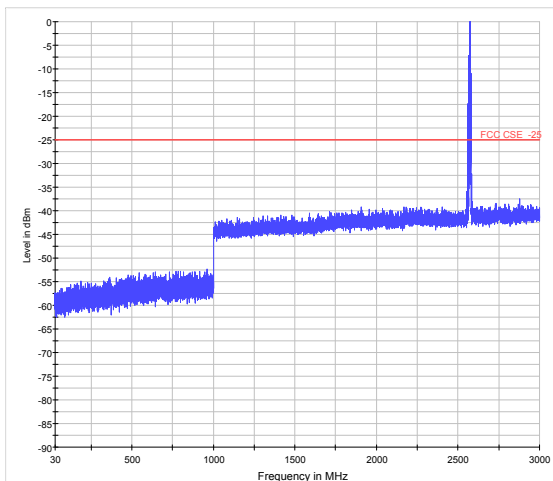


LTE Band 38 5MHz CH-Middle 30MHz~3GHz

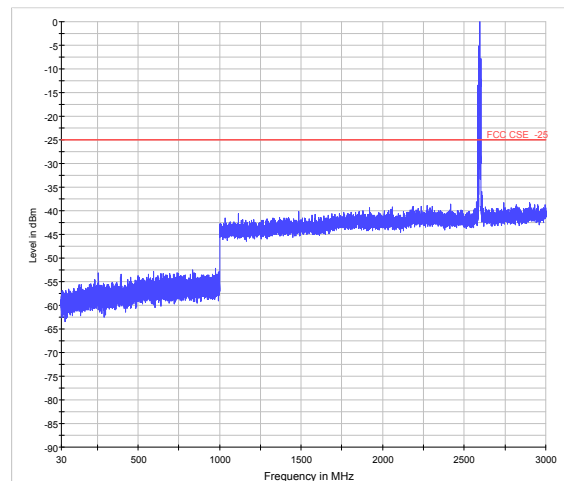


LTE Band 38 5MHz CH-Low 3GHz~18GHz

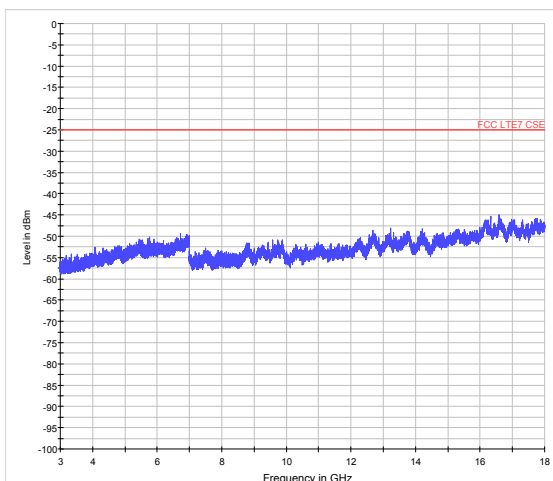


LTE Band 38 5MHz CH-Middle 3GHz~18GHz

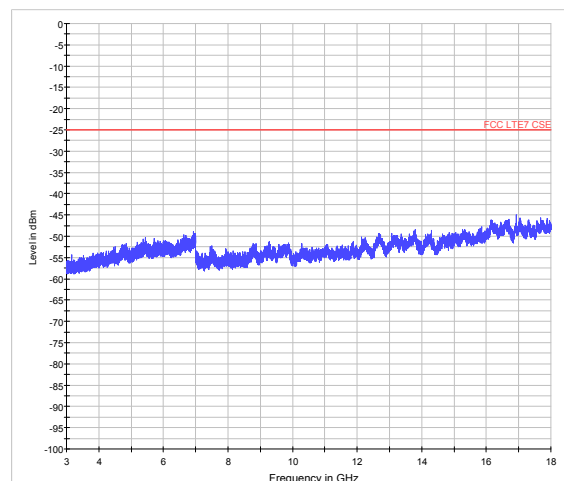

LTE Band 38 5MHz CH-Low 18GHz~26.5GHz

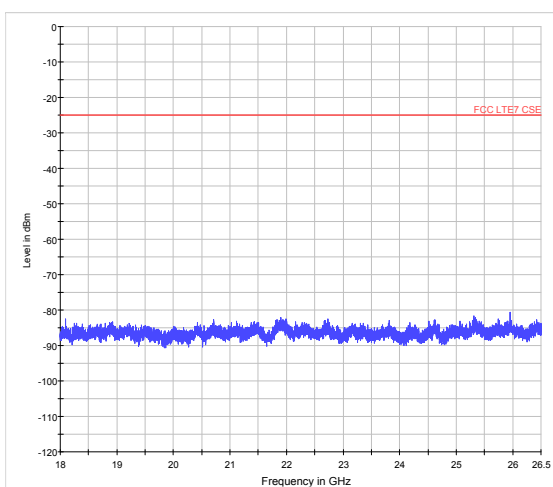


LTE Band 38 5MHz CH-Middle 18GHz~26.5GHz

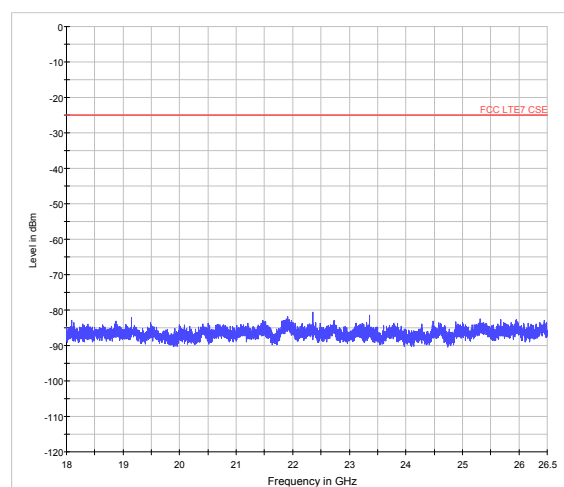





LTE Band 38 5MHz CH-High 30MHz~3GHz

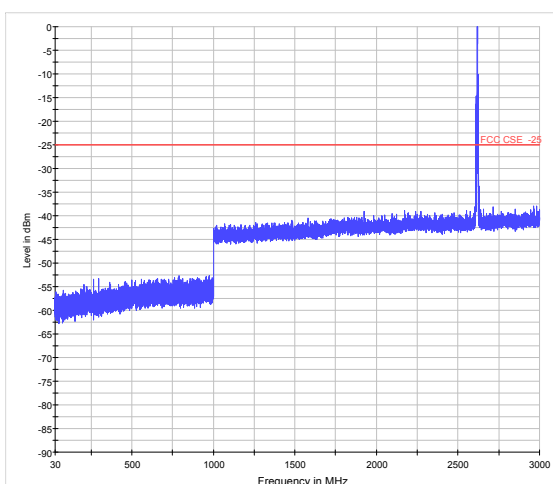


LTE Band 38 10MHz CH-Low 30MHz~3GHz

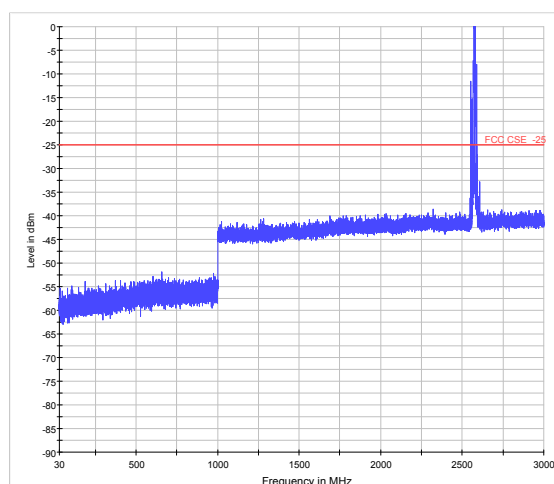



LTE Band 38 5MHz CH-High 3GHz~18GHz

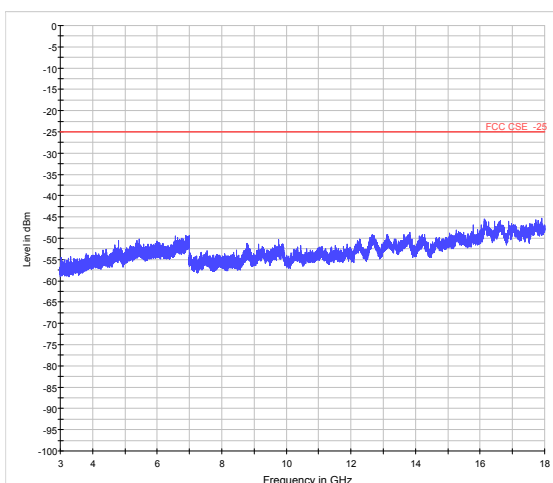


LTE Band 38 10MHz CH-Low 3GHz~18GHz

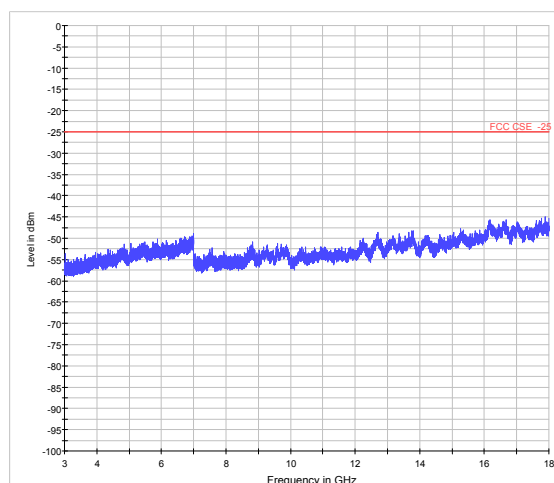


LTE Band 38 5MHz CH-High 18GHz~26.5GHz

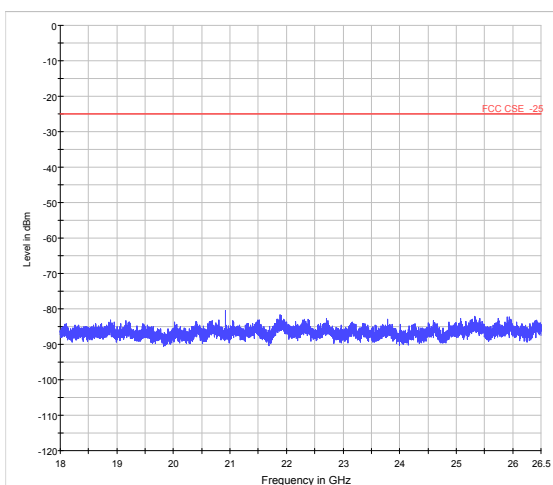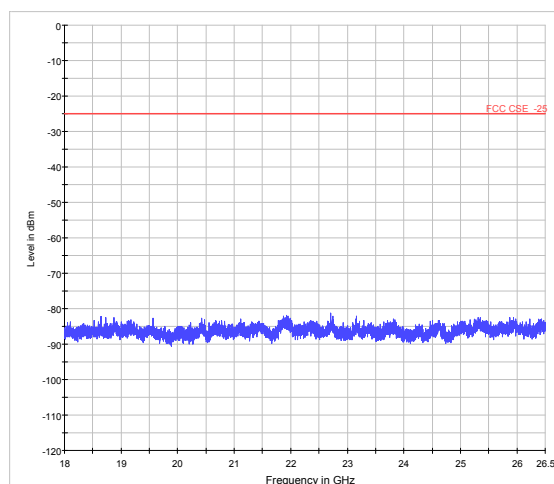LTE Band 38 10MHz C CH-Low
18GHz~26.5GHz


LTE Band 38 10MHz CH-Middle 30MHz~3GHz

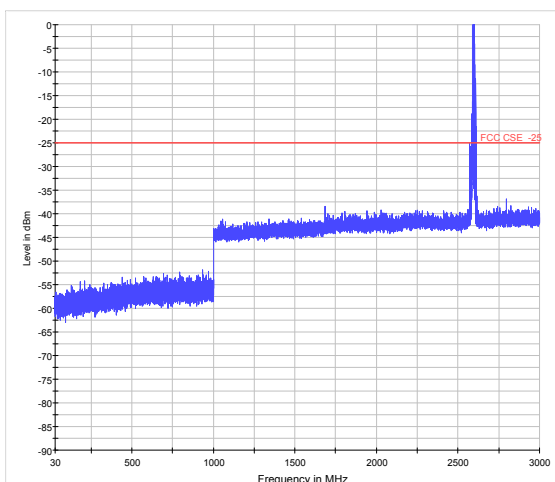


LTE Band 38 10MHz CH-High 30MHz~3GHz

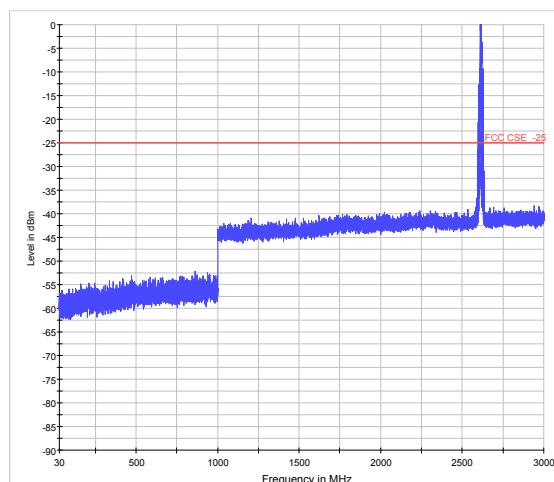


LTE Band 38 10MHz CH-Middle 3GHz~18GHz

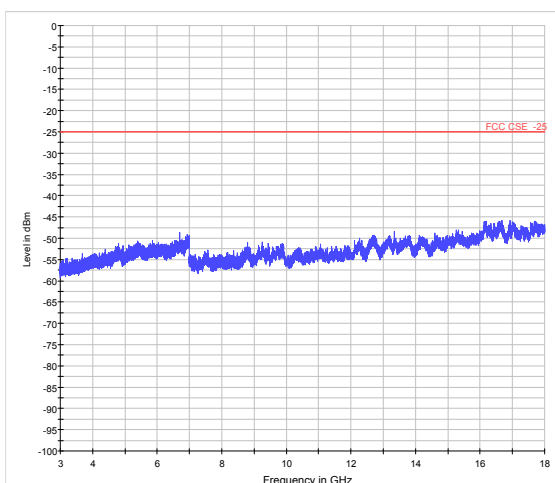


LTE Band 38 10MHz CH-High 3GHz~18GHz

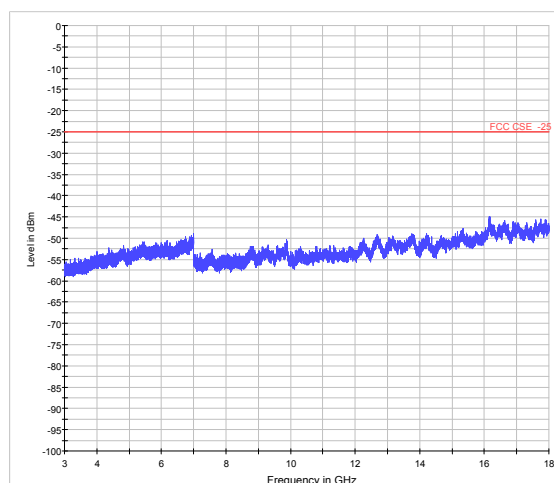

LTE Band 38 10MHz CH-Middle
18GHz~26.5GHz

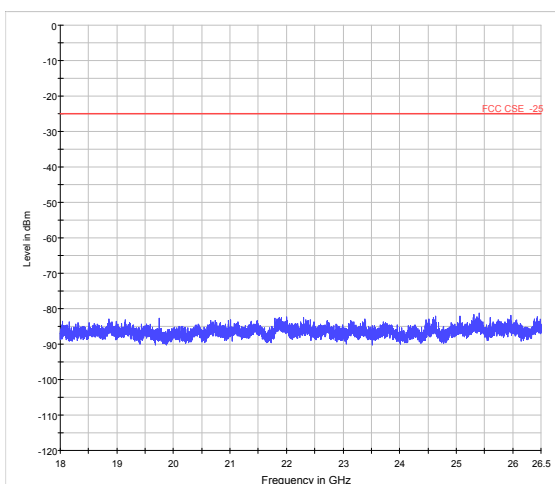


LTE Band 710MHz CH-High 18GHz~26.5GHz

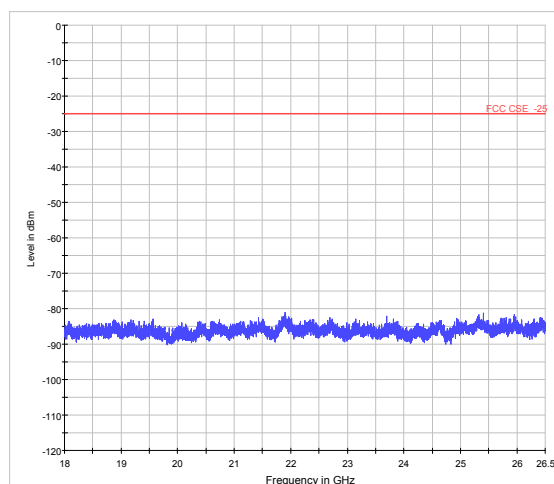





LTE Band 38 15MHz CH-Low 30MHz~3GHz

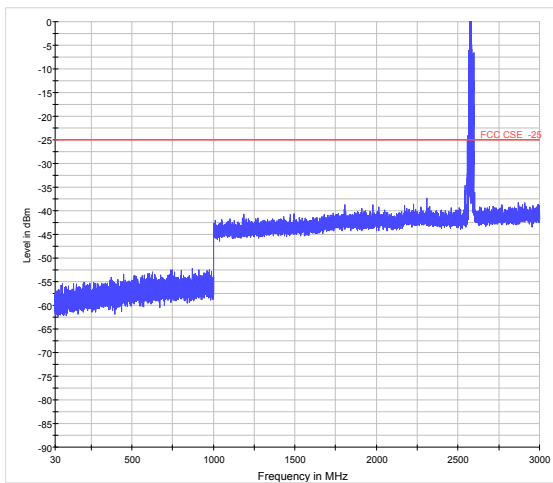


LTE Band 38 15MHz CH-Middle 30MHz~3GHz

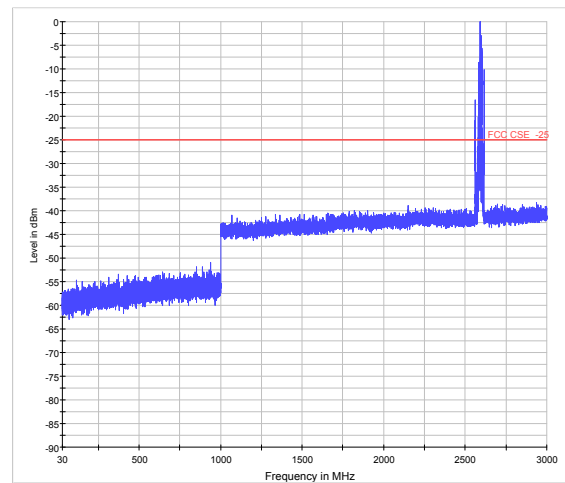



LTE Band 38 15MHz CH-Low 3GHz~18GHz

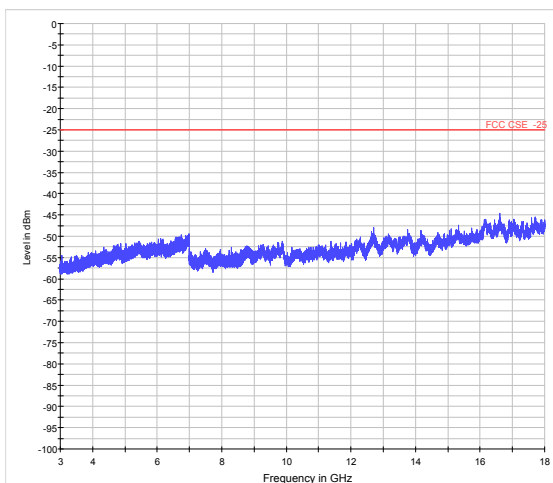

LTE Band 38 15MHz CH-Middle 3GHz~18GHz

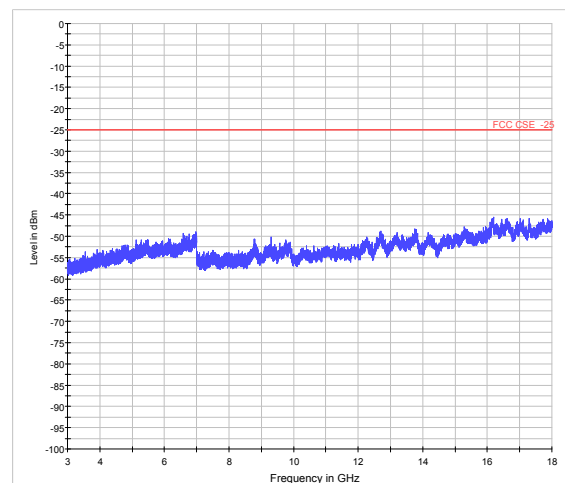


LTE Band 38 15MHz CH-Low 18GHz~26.5GHz

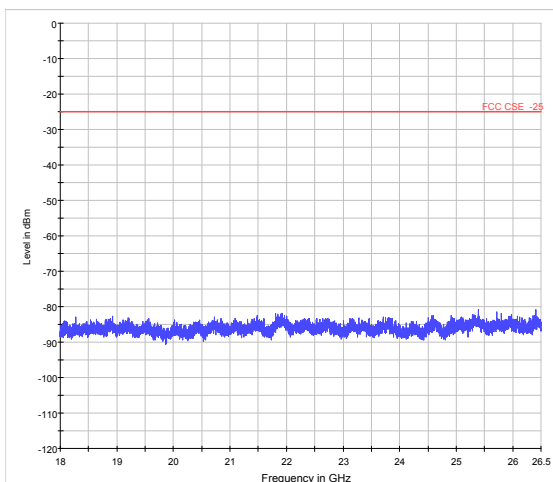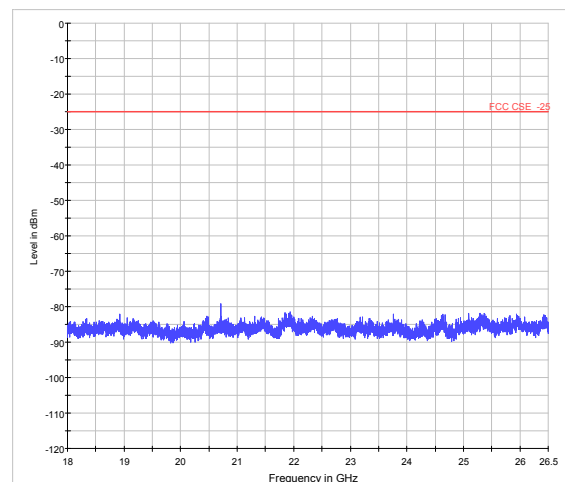
LTE Band 38 15MHz CH-Middle
18GHz~26.5GHz




LTE Band 38 15MHz CH-High 30MHz~3GHz

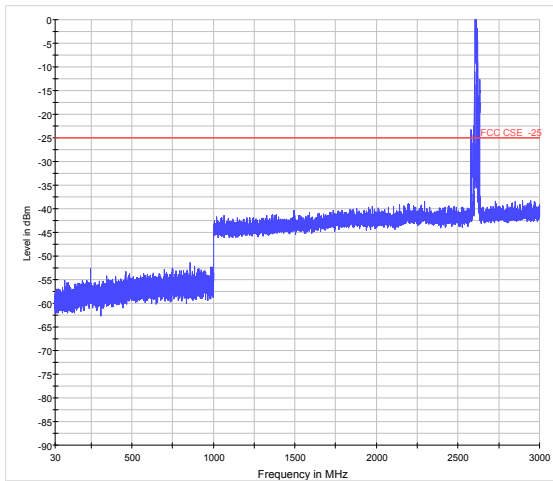


LTE Band 38 20MHz CH-Low 30MHz~3GHz

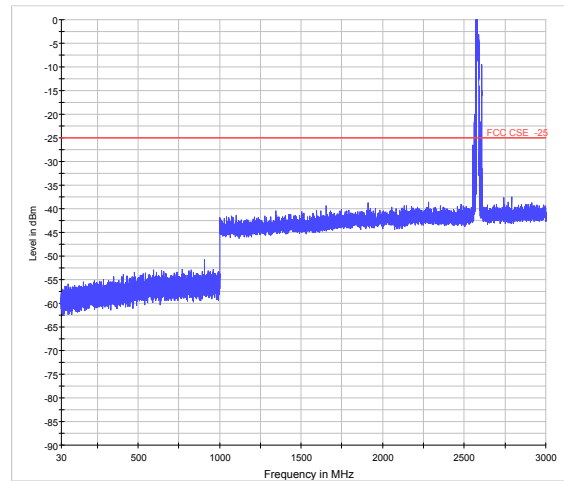


LTE Band 38 15MHz CH-High 3GHz~18GHz

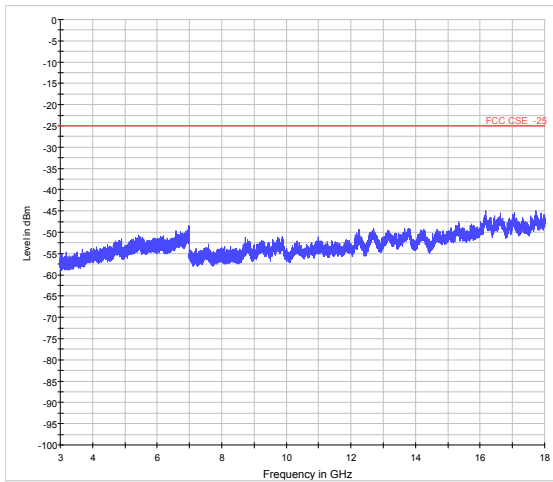


LTE Band 38 20MHz CH-Low 3GHz~18GHz

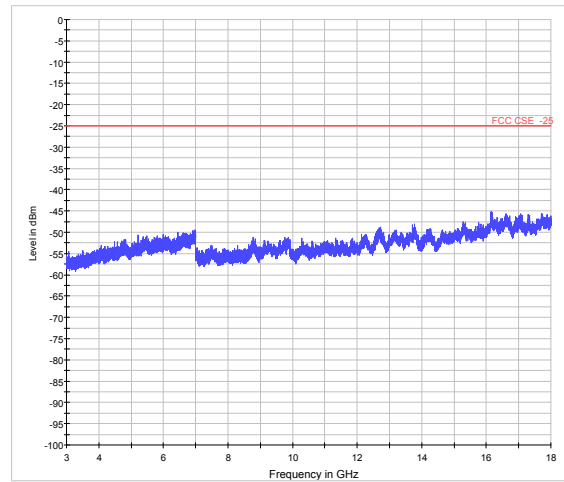


LTE Band 38 15MHz CH-High 18GHz~26.5GHz

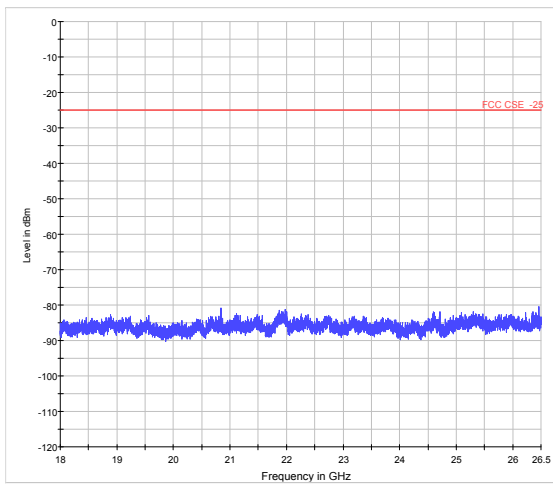


LTE Band 38 20MHz CH-Low 18GHz~26.5GHz

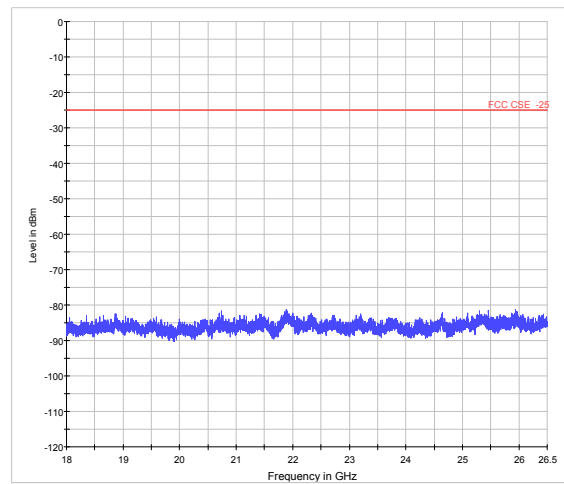


LTE Band 38 20MHz CH-Middle 30MHz~3GHz

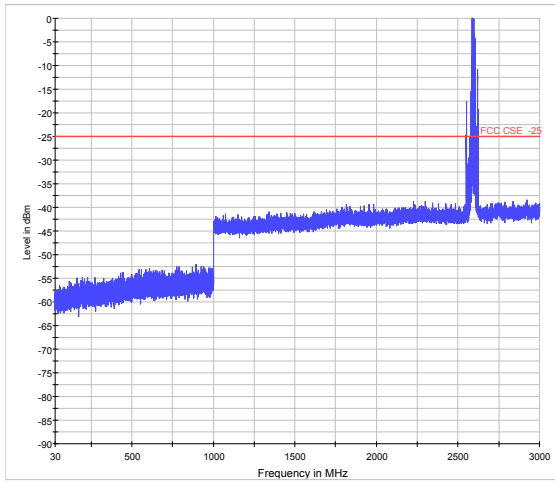


LTE Band 38 20MHz CH-High 30MHz~3GHz

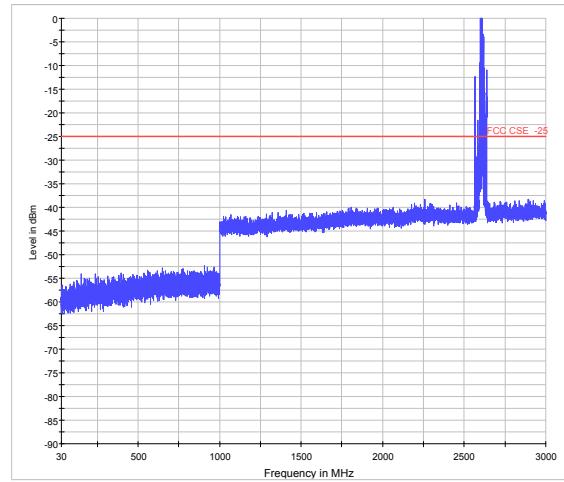


LTE Band 38 20MHz CH-Middle 3GHz~18GHz

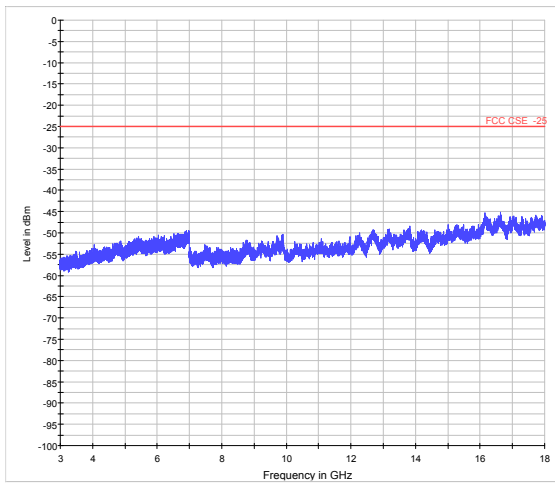


LTE Band 38 20MHz CH-High 3GHz~18GHz

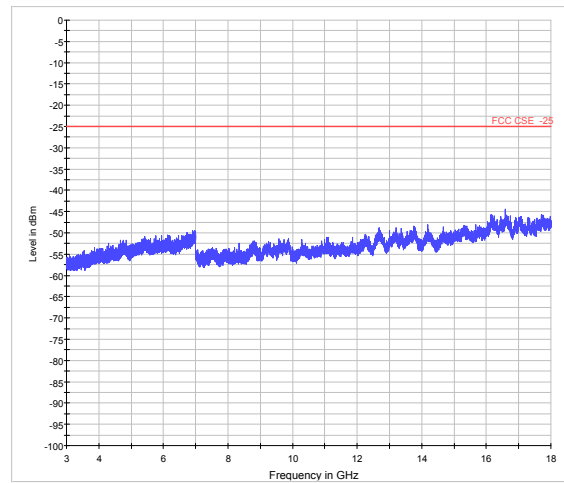

LTE Band 38 20MHz CH-Middle
18GHz~26.5GHz

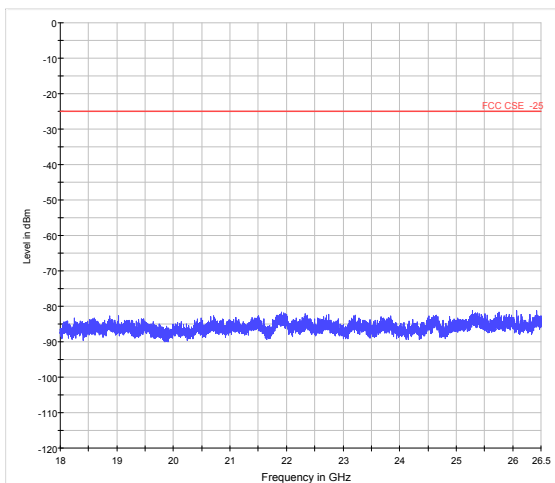

LTE Band 38 20MHz CH-High 18GHz~26.5GHz

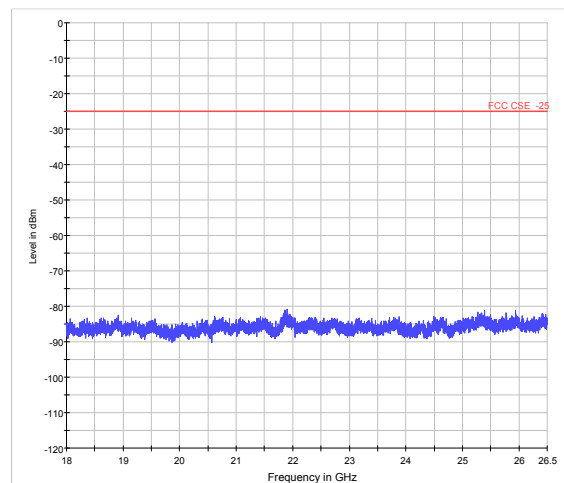

4.8 Radiates Spurious Emission

Ambient condition

Temperature	Relative humidity	Pressure
23°C ~25°C	45%~50%	101.5kPa

Method of Measurement

1. The testing follows FCC KDB 971168 v02r02 Section 5.8 and ANSI / TIA-603-D-2010 Section 2.2.12.
2. Above 30MHz: The EUT is placed on a turntable 0.8 meters above the ground in the chamber, 3 meter away from the antenna. The maximal emission value is acquired by adjusting the antenna height, polarisation and turntable azimuth. Normally, the height range of antenna is 1 m to 4 m, the azimuth range of turntable is 0° to 360°, and the receive antenna has two polarizations Vertical (V) and Horizontal (H). Above 1GHz: (Note: the FCC's permission to use 1.5m as an alternative per TCBC Conf call of Dec. 2, 2014.) The EUT is placed on a turntable 1.5 meters above the ground in the chamber, 3 meter away from the antenna. The maximal emission value is acquired by adjusting the antenna height, polarisation and turntable azimuth. Normally, the height range of antenna is 1 m to 4 m, the azimuth range of turntable is 0° to 360°, and the receive antenna has two polarizations Vertical (V) and Horizontal (H).
3. A log-periodic antenna or double-ridged waveguide horn antenna shall be substituted in place of the EUT. The log-periodic antenna will be driven by a signal generator and the level will be adjusted till the same power value on the spectrum analyzer or receiver. The level of the spurious emissions can be calculated through the level of the signal generator, cable loss, the gain of the substitution antenna and the reading of the spectrum analyzer or receiver.
4. The EUT is then put into continuously transmitting mode at its maximum power level during the test. Set Test Receiver or Spectrum RBW=1MHz, VBW=3MHz for above 1GHz and RBW=100kHz, VBW=300kHz for 30MHz to 1GHz,, And the maximum value of the receiver should be recorded as (Pr).
5. The EUT shall be replaced by a substitution antenna. In the chamber, an substitution antenna for the frequency band of interest is placed at the reference point of the chamber. An RF Signal source for the frequency band of interest is connected to the substitution antenna with a cable that has been constructed to not interfere with the radiation pattern of the antenna. A power (PMea) is applied to the input of the substitution antenna, and adjust the level of the signal generator output until the value of the receiver reach the previously recorded (Pr). The power of signal source (PMea) is recorded. The test should be performed by rotating the test item and adjusting the receiving antenna polarization.
6. A amplifier should be connected to the Signal Source output port. And the cable should be connect between the Amplifier and the Substitution Antenna. The cable loss (Pcl) ,the Substitution Antenna Gain (Ga) and the Amplifier Gain (PAG) should be recorded after test.
7. The measurement results are obtained as described below:

Power(EIRP)=PMea- PAG - Pcl + Ga

The measurement results are amend as described below:


Power(EIRP)=PMea- Pcl + Ga

8. This value is EIRP since the measurement is calibrated using an antenna of known gain (2.15 dBi)


and known input power. ERP can be calculated from EIRP by subtracting the gain of the dipole, $ERP = EIRP - 2.15\text{dBi}$.

Test setup

30MHz~~~ 1GHz

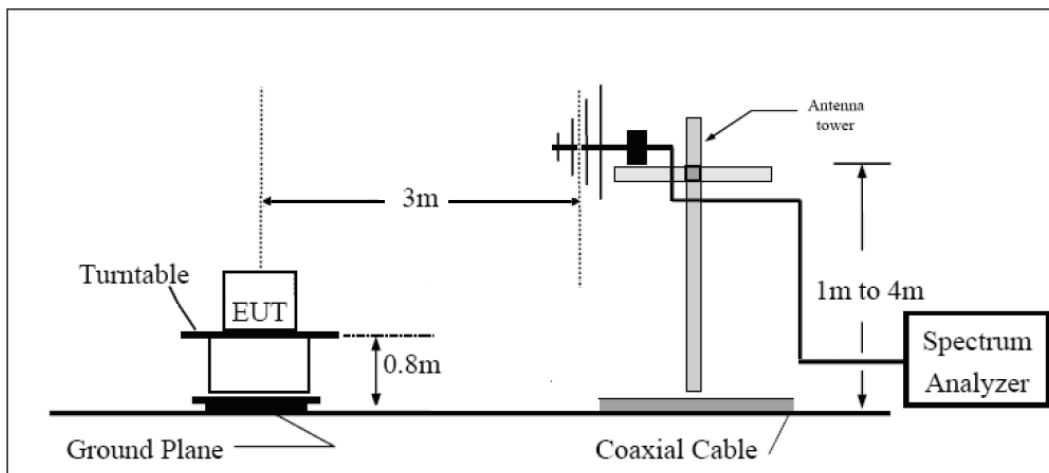

Above 1GHz

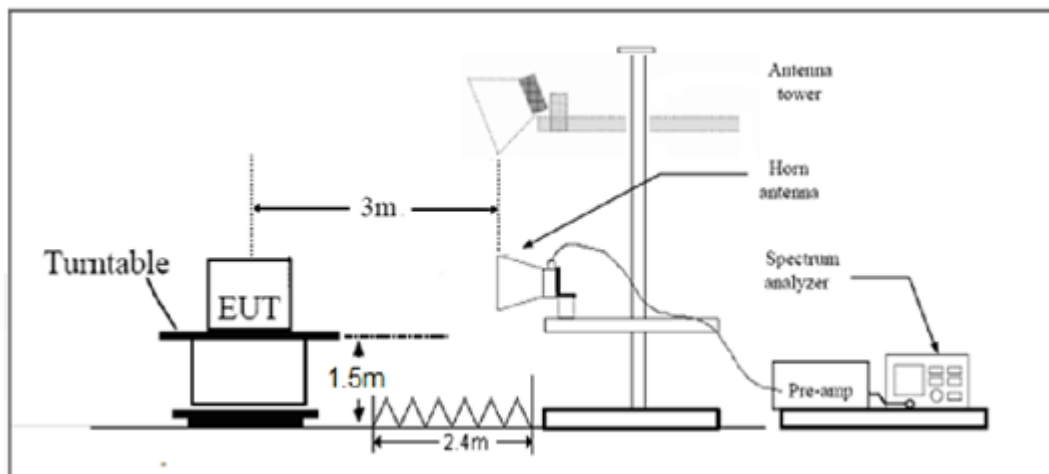

Note: Area side:2.4mX3.6m

The radiated emission was measured in the following position: EUT stand-up position (Z axis), lie-down position (X, Y axis). The worst emission was found in stand-up position (Z axis) and the worst case was recorded.

Limits

LTE -7/38 Rule Part 27.53(m) $55 + 10 \log (P)$ dB on all frequencies more than X megahertz from the channel edge, where X is the greater of 6 megahertz or the actual emission bandwidth as defined in paragraph (m)(4) of this section.

Limit	-25 dBm
-------	---------

Measurement Uncertainty

The assessed measurement uncertainty to ensure 95% confidence level for the normal distribution is with the coverage factor $k = \pm 1.96$, $U = \pm 3.55$ dB.

Test Result

LTE Band 7 QPSK 5MHz CH-Low, RB 1

Harmonic	Frequency (MHz)	SG (dBm)	Cable Loss (dB)	Gain (dBi)	Antenna Polarization	EIRP Level (dBm)	Limit (dBm)	Margin (dB)	Azimuth (deg)
2	5005.0	-57.95	2.00	9.15	Vertical	-50.8	-25.0	25.8	45
3	7507.5	-57.55	2.50	11.35	Vertical	-48.7	-25.0	23.7	90
4	10010.0	-55.25	4.20	12.05	Vertical	-47.4	-25.0	22.4	225
5	12512.5	-53.95	5.20	12.85	Vertical	-46.3	-25.0	21.3	135
6	15015.0	-50.83	5.50	14.23	Vertical	-42.1	-25.0	17.1	90
7	17517.5	-49.75	5.70	14.15	Vertical	-41.3	-25.0	16.3	135
8	20020.0	-45.16	6.30	13.76	Vertical	-37.7	-25.0	12.7	270
9	22522.5	-37.25	6.80	14.05	Vertical	-30.0	-25.0	5.0	225
10	25025.0	-40.64	6.90	14.84	Vertical	-32.7	-25.0	7.7	180

Note: 1.The other Spurious RF Radiated emissions level is no more than noise floor.

2. The worst emission was found in the antenna is vertical position.

LTE Band 7 QPSK 5MHz CH-Middle, RB 1

Harmonic	Frequency (MHz)	SG (dBm)	Cable Loss (dB)	Gain (dBi)	Antenna Polarization	EIRP Level (dBm)	Limit (dBm)	Margin (dB)	Azimuth (deg)
2	5070.0	-56.55	2.00	9.15	Vertical	-49.4	-25.0	24.4	45
3	7605.0	-56.65	2.50	11.35	Vertical	-47.8	-25.0	22.8	90
4	10140.0	-53.65	4.20	12.05	Vertical	-45.8	-25.0	20.8	225
5	12675.0	-53.35	5.20	12.85	Vertical	-45.7	-25.0	20.7	135
6	15210.0	-56.73	5.50	14.23	Vertical	-48.0	-25.0	23.0	90
7	17745.0	-48.55	5.70	14.15	Vertical	-40.1	-25.0	15.1	135
8	20280.0	-44.96	6.30	13.76	Vertical	-37.5	-25.0	12.5	270
9	22815.0	-43.45	6.80	14.05	Vertical	-36.2	-25.0	11.2	225
10	25350.0	-43.14	6.90	14.84	Vertical	-35.2	-25.0	10.2	180

Note: 1.The other Spurious RF Radiated emissions level is no more than noise floor.

2. The worst emission was found in the antenna is vertical position.

LTE Band 7 QPSK 5MHz CH-High, RB 1

Harmonic	Frequency (MHz)	SG (dBm)	Cable Loss (dB)	Gain (dBi)	Antenna Polarization	EIRP Level (dBm)	Limit (dBm)	Margin (dB)	Azimuth (deg)
2	5135.0	-58.15	2.00	9.15	Vertical	-51.0	-25.0	26.0	45
3	7702.5	-58.65	2.50	11.35	Vertical	-49.8	-25.0	24.8	90
4	10270.0	-56.05	4.20	12.05	Vertical	-48.2	-25.0	23.2	225
5	12837.5	-55.65	5.20	12.85	Vertical	-48.0	-25.0	23.0	90
6	15405.0	-52.93	5.50	14.23	Vertical	-44.2	-25.0	19.2	135
7	17972.5	-48.55	5.70	14.15	Vertical	-40.1	-25.0	15.1	270
8	20540.0	-45.66	6.30	13.76	Vertical	-38.2	-25.0	13.2	225
9	23107.5	-44.15	6.80	14.05	Vertical	-36.9	-25.0	11.9	180
10	25675.0	-41.84	6.90	14.84	Vertical	-33.9	-25.0	8.9	45

Note: 1.The other Spurious RF Radiated emissions level is no more than noise floor.

2. The worst emission was found in the antenna is vertical position.

LTE Band 7 QPSK 10MHz CH-Low, RB 1

Harmonic	Frequency (MHz)	SG (dBm)	Cable Loss (dB)	Gain (dBi)	Antenna Polarization	EIRP Level (dBm)	Limit (dBm)	Margin (dB)	Azimuth (deg)
2	5010.0	-57.75	2.00	9.15	Vertical	-50.6	-25.0	25.6	90
3	7515.0	-57.15	2.50	11.35	Vertical	-48.3	-25.0	23.3	225
4	10020.0	-51.25	4.20	12.05	Vertical	-43.4	-25.0	18.4	135
5	12525.0	-48.45	5.20	12.85	Vertical	-40.8	-25.0	15.8	90
6	15030.0	-45.53	5.50	14.23	Vertical	-36.8	-25.0	11.8	135
7	17535.0	-44.35	5.70	14.15	Vertical	-35.9	-25.0	10.9	270
8	20040.0	-43.16	6.30	13.76	Vertical	-35.7	-25.0	10.7	225
9	22545.0	-41.45	6.80	14.05	Vertical	-34.2	-25.0	9.2	180
10	25050.0	-41.44	6.90	14.84	Vertical	-33.5	-25.0	8.5	45

Note: 1.The other Spurious RF Radiated emissions level is no more than noise floor.

2. The worst emission was found in the antenna is vertical position.

LTE Band 7 QPSK 10MHz CH-Middle, RB 1

Harmonic	Frequency (MHz)	SG (dBm)	Cable Loss (dB)	Gain (dBi)	Antenna Polarization	EIRP Level (dBm)	Limit (dBm)	Margin (dB)	Azimuth (deg)
2	5070.0	-57.65	2.00	9.15	Vertical	-50.5	-25.0	25.5	90
3	7605.0	-58.35	2.50	11.35	Vertical	-49.5	-25.0	24.5	225
4	10140.0	-56.05	4.20	12.05	Vertical	-48.2	-25.0	23.2	90
5	12675.0	-53.35	5.20	12.85	Vertical	-45.7	-25.0	20.7	135
6	15210.0	-53.03	5.50	14.23	Vertical	-44.3	-25.0	19.3	270
7	17745.0	-48.95	5.70	14.15	Vertical	-40.5	-25.0	15.5	225
8	20280.0	-46.16	6.30	13.76	Vertical	-38.7	-25.0	13.7	180
9	22815.0	-43.05	6.80	14.05	Vertical	-35.8	-25.0	10.8	45
10	25350.0	-41.64	6.90	14.84	Vertical	-33.7	-25.0	8.7	90

Note: 1.The other Spurious RF Radiated emissions level is no more than noise floor.

2. The worst emission was found in the antenna is vertical position.

LTE Band 7 QPSK 10MHz CH-High, RB 1

Harmonic	Frequency (MHz)	SG (dBm)	Cable Loss (dB)	Gain (dBi)	Antenna Polarization	EIRP Level (dBm)	Limit (dBm)	Margin (dB)	Azimuth (deg)
2	5130.0	-54.95	2.00	10.15	Vertical	-46.8	-25.0	21.8	225
3	7695.0	-50.65	2.50	11.35	Vertical	-41.8	-25.0	16.8	90
4	10260.0	-47.65	4.20	12.05	Vertical	-39.8	-25.0	14.8	135
5	12825.0	-48.15	5.20	14.85	Vertical	-38.5	-25.0	13.5	270
6	15390.0	-44.23	5.50	13.23	Vertical	-36.5	-25.0	11.5	225
7	17955.0	-41.75	5.70	12.15	Vertical	-35.3	-25.0	10.3	180
8	20520.0	-42.56	6.30	13.76	Vertical	-35.1	-25.0	10.1	45
9	23085.0	-41.75	6.80	14.05	Vertical	-34.5	-25.0	9.5	90
10	25650.0	-41.44	6.90	14.84	Vertical	-33.5	-25.0	8.5	225

Note: 1.The other Spurious RF Radiated emissions level is no more than noise floor.

2. The worst emission was found in the antenna is vertical position.

LTE Band 7 QPSK 15MHz CH-Low, RB 1

Harmonic	Frequency (MHz)	SG (dBm)	Cable Loss (dB)	Gain (dBi)	Antenna Polarization	EIRP Level (dBm)	Limit (dBm)	Margin (dB)	Azimuth (deg)
2	5015.0	-54.35	2.00	10.15	Vertical	-46.2	-25.0	21.2	135
3	7522.5	-50.25	2.50	11.35	Vertical	-41.4	-25.0	16.4	90
4	10030.0	-46.85	4.20	12.05	Vertical	-39.0	-25.0	14.0	135
5	12537.5	-47.75	5.20	14.85	Vertical	-38.1	-25.0	13.1	270
6	15045.0	-41.93	5.50	13.23	Vertical	-34.2	-25.0	9.2	225
7	17552.5	-41.85	5.70	12.15	Vertical	-35.4	-25.0	10.4	180
8	20060.0	-41.96	6.30	13.76	Vertical	-34.5	-25.0	9.5	45
9	22567.5	-41.35	6.80	14.05	Vertical	-34.1	-25.0	9.1	90
10	25075.0	-41.54	6.90	14.84	Vertical	-33.6	-25.0	8.6	225

Note: 1.The other Spurious RF Radiated emissions level is no more than noise floor.

2. The worst emission was found in the antenna is vertical position.

LTE Band 7 QPSK 15MHz CH-Middle, RB 1

Harmonic	Frequency (MHz)	SG (dBm)	Cable Loss (dB)	Gain (dBi)	Antenna Polarization	EIRP Level (dBm)	Limit (dBm)	Margin (dB)	Azimuth (deg)
2	5070.0	-54.45	2.00	10.15	Vertical	-46.3	-25.0	21.3	135
3	7605.0	-51.45	2.50	11.35	Vertical	-42.6	-25.0	17.6	90
4	10140.0	-46.75	4.20	12.05	Vertical	-38.9	-25.0	13.9	135
5	12675.0	-46.05	5.20	14.85	Vertical	-36.4	-25.0	11.4	270
6	15210.0	-43.33	5.50	13.23	Vertical	-35.6	-25.0	10.6	225
7	17745.0	-41.25	5.70	12.15	Vertical	-34.8	-25.0	9.8	180
8	20280.0	-41.56	6.30	13.76	Vertical	-34.1	-25.0	9.1	45
9	22815.0	-40.75	6.80	14.05	Vertical	-33.5	-25.0	8.5	90
10	25350.0	-40.54	6.90	14.84	Vertical	-32.6	-25.0	7.6	225

Note: 1.The other Spurious RF Radiated emissions level is no more than noise floor.

2. The worst emission was found in the antenna is vertical position.

LTE Band 7 QPSK 15MHz CH-High, RB 1

Harmonic	Frequency (MHz)	SG (dBm)	Cable Loss (dB)	Gain (dBi)	Antenna Polarization	EIRP Level (dBm)	Limit (dBm)	Margin (dB)	Azimuth (deg)
2	5125.0	-53.95	2.00	10.15	Vertical	-45.8	-25.0	20.8	90
3	7687.5	-50.75	2.50	11.35	Vertical	-41.9	-25.0	16.9	135
4	10250.0	-46.65	4.20	12.05	Vertical	-38.8	-25.0	13.8	270
5	12812.5	-46.55	5.20	14.85	Vertical	-36.9	-25.0	11.9	225
6	15375.0	-44.23	5.50	13.23	Vertical	-36.5	-25.0	11.5	180
7	17937.5	-40.65	5.70	12.15	Vertical	-34.2	-25.0	9.2	45
8	20500.0	-40.96	6.30	13.76	Vertical	-33.5	-25.0	8.5	90
9	23062.5	-39.85	6.80	14.05	Vertical	-32.6	-25.0	7.6	225
10	25625.0	-40.04	6.90	14.84	Vertical	-32.1	-25.0	7.1	90

Note: 1.The other Spurious RF Radiated emissions level is no more than noise floor.

2. The worst emission was found in the antenna is vertical position.

LTE Band 7 QPSK 20MHz CH-Low, RB 1

Harmonic	Frequency (MHz)	SG (dBm)	Cable Loss (dB)	Gain (dBi)	Antenna Polarization	EIRP Level (dBm)	Limit (dBm)	Margin (dB)	Azimuth (deg)
2	5020.0	-54.15	2.00	10.15	Vertical	-46.0	-25.0	21.0	135
3	7530.0	-51.25	2.50	11.35	Vertical	-42.4	-25.0	17.4	270
4	10040.0	-47.75	4.20	12.05	Vertical	-39.9	-25.0	14.9	225
5	12550.0	-46.05	5.20	14.85	Vertical	-36.4	-25.0	11.4	180
6	15060.0	-43.33	5.50	13.23	Vertical	-35.6	-25.0	10.6	45
7	17570.0	-41.25	5.70	12.15	Vertical	-34.8	-25.0	9.8	90
8	20080.0	-41.56	6.30	13.76	Vertical	-34.1	-25.0	9.1	225
9	22590.0	-40.75	6.80	14.05	Vertical	-33.5	-25.0	8.5	135
10	25100.0	-40.94	6.90	14.84	Vertical	-33.0	-25.0	8.0	90

Note: 1.The other Spurious RF Radiated emissions level is no more than noise floor.

2. The worst emission was found in the antenna is vertical position.

LTE Band 7 QPSK 20MHz CH-Middle, RB 1

Harmonic	Frequency (MHz)	SG (dBm)	Cable Loss (dB)	Gain (dBi)	Antenna Polarization	EIRP Level (dBm)	Limit (dBm)	Margin (dB)	Azimuth (deg)
2	5070.0	-53.85	2.00	10.15	Vertical	-45.7	-25.0	20.7	135
3	7605.0	-51.05	2.50	11.35	Vertical	-42.2	-25.0	17.2	270
4	10140.0	-46.05	4.20	12.05	Vertical	-38.2	-25.0	13.2	225
5	12675.0	-46.45	5.20	14.85	Vertical	-36.8	-25.0	11.8	180
6	15210.0	-42.53	5.50	13.23	Vertical	-34.8	-25.0	9.8	45
7	17745.0	-41.55	5.70	12.15	Vertical	-35.1	-25.0	10.1	90
8	20280.0	-41.96	6.30	13.76	Vertical	-34.5	-25.0	9.5	225
9	22815.0	-41.35	6.80	14.05	Vertical	-34.1	-25.0	9.1	90
10	25350.0	-41.44	6.90	14.84	Vertical	-33.5	-25.0	8.5	135

Note: 1.The other Spurious RF Radiated emissions level is no more than noise floor.

2. The worst emission was found in the antenna is vertical position.

LTE Band 7 QPSK 20MHz CH-High, RB 1

Harmonic	Frequency (MHz)	SG (dBm)	Cable Loss (dB)	Gain (dBi)	Antenna Polarization	EIRP Level (dBm)	Limit (dBm)	Margin (dB)	Azimuth (deg)
2	5120.0	-53.85	2.00	10.15	Vertical	-45.7	-25.0	20.7	270
3	7680.0	-51.55	2.50	11.35	Vertical	-42.7	-25.0	17.7	225
4	10240.0	-46.55	4.20	12.05	Vertical	-38.7	-25.0	13.7	180
5	12800.0	-45.75	5.20	14.85	Vertical	-36.1	-25.0	11.1	45
6	15360.0	-45.63	5.50	13.23	Vertical	-37.9	-25.0	12.9	90
7	17920.0	-41.15	5.70	12.15	Vertical	-34.7	-25.0	9.7	225
8	20480.0	-41.66	6.30	13.76	Vertical	-34.2	-25.0	9.2	135
9	23040.0	-40.75	6.80	14.05	Vertical	-33.5	-25.0	8.5	90
10	25600.0	-41.14	6.90	14.84	Vertical	-33.2	-25.0	8.2	225

Note: 1.The other Spurious RF Radiated emissions level is no more than noise floor.

2. The worst emission was found in the antenna is vertical position.

LTE Band 38 QPSK 5MHz CH-Low, RB 1

Harmonic	Frequency (MHz)	SG (dBm)	Cable Loss (dB)	Gain (dBi)	Antenna Polarization	EIRP Level (dBm)	Limit (dBm)	Margin (dB)	Azimuth (deg)
2	5145.0	-53.45	2.00	9.15	Vertical	-46.3	-25.0	21.3	45
3	7717.5	-50.35	2.50	11.35	Vertical	-41.5	-25.0	16.5	90
4	10290.0	-46.65	4.20	12.05	Vertical	-38.8	-25.0	13.8	225
5	12862.5	-44.65	5.20	12.85	Vertical	-37.0	-25.0	12.0	135
6	15435.0	-42.83	5.50	14.23	Vertical	-34.1	-25.0	9.1	90
7	18007.5	-43.85	5.70	14.15	Vertical	-35.4	-25.0	10.4	135
8	20580.0	-42.66	6.30	13.76	Vertical	-35.2	-25.0	10.2	270
9	23152.5	-41.75	6.80	14.05	Vertical	-34.5	-25.0	9.5	225
10	25725.0	-41.54	6.90	14.84	Vertical	-33.6	-25.0	8.6	180

Note: 1.The other Spurious RF Radiated emissions level is no more than noise floor.

2. The worst emission was found in the antenna is vertical position.

LTE Band 38 QPSK 5MHz CH-Middle, RB 1

Harmonic	Frequency (MHz)	SG (dBm)	Cable Loss (dB)	Gain (dBi)	Antenna Polarization	EIRP Level (dBm)	Limit (dBm)	Margin (dB)	Azimuth (deg)
2	5190.0	-53.45	2.00	9.15	Vertical	-46.3	-25.0	21.3	45
3	7785.0	-49.05	2.50	11.35	Vertical	-40.2	-25.0	15.2	90
4	10380.0	-45.85	4.20	12.05	Vertical	-38.0	-25.0	13.0	225
5	12975.0	-44.35	5.20	12.85	Vertical	-36.7	-25.0	11.7	90
6	15570.0	-45.03	5.50	14.23	Vertical	-36.3	-25.0	11.3	135
7	18165.0	-42.85	5.70	14.15	Vertical	-34.4	-25.0	9.4	270
8	20760.0	-41.46	6.30	13.76	Vertical	-34.0	-25.0	9.0	225
9	23355.0	-40.75	6.80	14.05	Vertical	-33.5	-25.0	8.5	180
10	25950.0	-40.04	6.90	14.84	Vertical	-32.1	-25.0	7.1	45

Note: 1.The other Spurious RF Radiated emissions level is no more than noise floor.

2. The worst emission was found in the antenna is vertical position.

LTE Band 38 QPSK 5MHz CH-High, RB 1

Harmonic	Frequency (MHz)	SG (dBm)	Cable Loss (dB)	Gain (dBi)	Antenna Polarization	EIRP Level (dBm)	Limit (dBm)	Margin (dB)	Azimuth (deg)
2	5235.0	-53.95	2.00	9.15	Vertical	-46.8	-25.0	21.8	90
3	7852.5	-50.75	2.50	11.35	Vertical	-41.9	-25.0	16.9	225
4	10470.0	-46.65	4.20	12.05	Vertical	-38.8	-25.0	13.8	135
5	13087.5	-44.85	5.20	12.85	Vertical	-37.2	-25.0	12.2	90
6	15705.0	-45.23	5.50	14.23	Vertical	-36.5	-25.0	11.5	135
7	18322.5	-43.15	5.70	14.15	Vertical	-34.7	-25.0	9.7	270
8	20940.0	-41.66	6.30	13.76	Vertical	-34.2	-25.0	9.2	225
9	23557.5	-40.75	6.80	14.05	Vertical	-33.5	-25.0	8.5	45
10	26175.0	-41.54	6.90	14.84	Vertical	-33.6	-25.0	8.6	90

Note: 1.The other Spurious RF Radiated emissions level is no more than noise floor.

2. The worst emission was found in the antenna is vertical position.

LTE Band 38 QPSK 10MHz CH-Low, RB 1

Harmonic	Frequency (MHz)	SG (dBm)	Cable Loss (dB)	Gain (dBi)	Antenna Polarization	EIRP Level (dBm)	Limit (dBm)	Margin (dB)	Azimuth (deg)
2	5150.0	-52.35	2.00	9.15	Vertical	-45.2	-25.0	20.2	225
3	7725.0	-50.55	2.50	11.35	Vertical	-41.7	-25.0	16.7	135
4	10300.0	-46.75	4.20	12.05	Vertical	-38.9	-25.0	13.9	90
5	12875.0	-45.25	5.20	12.85	Vertical	-37.6	-25.0	12.6	135
6	15450.0	-44.73	5.50	14.23	Vertical	-36.0	-25.0	11.0	270
7	18025.0	-43.85	5.70	14.15	Vertical	-35.4	-25.0	10.4	225
8	20600.0	-42.56	6.30	13.76	Vertical	-35.1	-25.0	10.1	180
9	23175.0	-41.75	6.80	14.05	Vertical	-34.5	-25.0	9.5	45
10	25750.0	-41.44	6.90	14.84	Vertical	-33.5	-25.0	8.5	90

Note: 1.The other Spurious RF Radiated emissions level is no more than noise floor.

2. The worst emission was found in the antenna is vertical position.

LTE Band 38 QPSK 10MHz CH-Middle, RB 1

Harmonic	Frequency (MHz)	SG (dBm)	Cable Loss (dB)	Gain (dBi)	Antenna Polarization	EIRP Level (dBm)	Limit (dBm)	Margin (dB)	Azimuth (deg)
2	5190.0	-52.65	2.00	9.15	Vertical	-45.5	-25.0	20.5	225
3	7785.0	-51.35	2.50	11.35	Vertical	-42.5	-25.0	17.5	90
4	10380.0	-47.25	4.20	12.05	Vertical	-39.4	-25.0	14.4	135
5	12975.0	-44.45	5.20	12.85	Vertical	-36.8	-25.0	11.8	270
6	15570.0	-45.43	5.50	14.23	Vertical	-36.7	-25.0	11.7	225
7	18165.0	-43.15	5.70	14.15	Vertical	-34.7	-25.0	9.7	180
8	20760.0	-40.96	6.30	13.76	Vertical	-33.5	-25.0	8.5	45
9	23355.0	-40.45	6.80	14.05	Vertical	-33.2	-25.0	8.2	90
10	25950.0	-40.04	6.90	14.84	Vertical	-32.1	-25.0	7.1	225

Note: 1.The other Spurious RF Radiated emissions level is no more than noise floor.

2. The worst emission was found in the antenna is vertical position.

LTE Band 38 QPSK 10MHz CH-High, RB 1

Harmonic	Frequency (MHz)	SG (dBm)	Cable Loss (dB)	Gain (dBi)	Antenna Polarization	EIRP Level (dBm)	Limit (dBm)	Margin (dB)	Azimuth (deg)
2	5230.0	-54.25	2.00	10.15	Vertical	-46.1	-25.0	21.1	135
3	7845.0	-50.15	2.50	11.35	Vertical	-41.3	-25.0	16.3	90
4	10460.0	-47.25	4.20	12.05	Vertical	-39.4	-25.0	14.4	135
5	13075.0	-48.55	5.20	14.85	Vertical	-38.9	-25.0	13.9	270
6	15690.0	-42.43	5.50	13.23	Vertical	-34.7	-25.0	9.7	225
7	18305.0	-42.05	5.70	12.15	Vertical	-35.6	-25.0	10.6	45
8	20920.0	-41.96	6.30	13.76	Vertical	-34.5	-25.0	9.5	90
9	23535.0	-40.85	6.80	14.05	Vertical	-33.6	-25.0	8.6	225
10	26150.0	-40.44	6.90	14.84	Vertical	-32.5	-25.0	7.5	135

Note: 1.The other Spurious RF Radiated emissions level is no more than noise floor.

2. The worst emission was found in the antenna is vertical position.

LTE Band 38 QPSK 15MHz CH-Low, RB 1

Harmonic	Frequency (MHz)	SG (dBm)	Cable Loss (dB)	Gain (dBi)	Antenna Polarization	EIRP Level (dBm)	Limit (dBm)	Margin (dB)	Azimuth (deg)
2	5155.0	-54.45	2.00	10.15	Vertical	-46.3	-25.0	21.3	90
3	7732.5	-50.15	2.50	11.35	Vertical	-41.3	-25.0	16.3	135
4	10310.0	-46.85	4.20	12.05	Vertical	-39.0	-25.0	14.0	270
5	12887.5	-46.05	5.20	14.85	Vertical	-36.4	-25.0	11.4	225
6	15465.0	-44.13	5.50	13.23	Vertical	-36.4	-25.0	11.4	180
7	18042.5	-40.55	5.70	12.15	Vertical	-34.1	-25.0	9.1	45
8	20620.0	-40.96	6.30	13.76	Vertical	-33.5	-25.0	8.5	90
9	23197.5	-39.85	6.80	14.05	Vertical	-32.6	-25.0	7.6	225
10	25775.0	-40.04	6.90	14.84	Vertical	-32.1	-25.0	7.1	90

Note: 1.The other Spurious RF Radiated emissions level is no more than noise floor.

2. The worst emission was found in the antenna is vertical position.

LTE Band 38 QPSK 15MHz CH-Middle, RB 1

Harmonic	Frequency (MHz)	SG (dBm)	Cable Loss (dB)	Gain (dBi)	Antenna Polarization	EIRP Level (dBm)	Limit (dBm)	Margin (dB)	Azimuth (deg)
2	5190.0	-54.95	2.00	10.15	Vertical	-46.8	-25.0	21.8	135
3	7785.0	-51.05	2.50	11.35	Vertical	-42.2	-25.0	17.2	270
4	10380.0	-46.95	4.20	12.05	Vertical	-39.1	-25.0	14.1	225
5	12975.0	-47.05	5.20	14.85	Vertical	-37.4	-25.0	12.4	180
6	15570.0	-42.63	5.50	13.23	Vertical	-34.9	-25.0	9.9	45
7	18165.0	-41.45	5.70	12.15	Vertical	-35.0	-25.0	10.0	90
8	20760.0	-41.96	6.30	13.76	Vertical	-34.5	-25.0	9.5	225
9	23355.0	-41.35	6.80	14.05	Vertical	-34.1	-25.0	9.1	135
10	25950.0	-41.54	6.90	14.84	Vertical	-33.6	-25.0	8.6	90

Note: 1.The other Spurious RF Radiated emissions level is no more than noise floor.

2. The worst emission was found in the antenna is vertical position.

LTE Band 38 QPSK 15MHz CH-High, RB 1

Harmonic	Frequency (MHz)	SG (dBm)	Cable Loss (dB)	Gain (dBi)	Antenna Polarization	EIRP Level (dBm)	Limit (dBm)	Margin (dB)	Azimuth (deg)
2	5225.0	-54.45	2.00	10.15	Vertical	-46.3	-25.0	21.3	135
3	7837.5	-50.85	2.50	11.35	Vertical	-42.0	-25.0	17.0	270
4	10450.0	-47.15	4.20	12.05	Vertical	-39.3	-25.0	14.3	225
5	13062.5	-47.45	5.20	14.85	Vertical	-37.8	-25.0	12.8	45
6	15675.0	-43.73	5.50	13.23	Vertical	-36.0	-25.0	11.0	90
7	18287.5	-41.05	5.70	12.15	Vertical	-34.6	-25.0	9.6	225
8	20900.0	-41.56	6.30	13.76	Vertical	-34.1	-25.0	9.1	135
9	23512.5	-40.75	6.80	14.05	Vertical	-33.5	-25.0	8.5	90
10	26125.0	-40.04	6.90	14.84	Vertical	-32.1	-25.0	7.1	135

Note: 1.The other Spurious RF Radiated emissions level is no more than noise floor.

2. The worst emission was found in the antenna is vertical position.

LTE Band 38 QPSK 20MHz CH-Low, RB 1

Harmonic	Frequency (MHz)	SG (dBm)	Cable Loss (dB)	Gain (dBi)	Antenna Polarization	EIRP Level (dBm)	Limit (dBm)	Margin (dB)	Azimuth (deg)
2	5160.0	-54.45	2.00	10.15	Vertical	-46.3	-25.0	21.3	270
3	7740.0	-49.45	2.50	11.35	Vertical	-40.6	-25.0	15.6	225
4	10320.0	-46.15	4.20	12.05	Vertical	-38.3	-25.0	13.3	180
5	12900.0	-45.45	5.20	14.85	Vertical	-35.8	-25.0	10.8	45
6	15480.0	-43.83	5.50	13.23	Vertical	-36.1	-25.0	11.1	90
7	18060.0	-41.35	5.70	12.15	Vertical	-34.9	-25.0	9.9	225
8	20640.0	-40.96	6.30	13.76	Vertical	-33.5	-25.0	8.5	90
9	23220.0	-39.75	6.80	14.05	Vertical	-32.5	-25.0	7.5	135
10	25800.0	-40.04	6.90	14.84	Vertical	-32.1	-25.0	7.1	270

Note: 1.The other Spurious RF Radiated emissions level is no more than noise floor.

2. The worst emission was found in the antenna is vertical position.

LTE Band 38 QPSK 20MHz CH-Middle, RB 1

Harmonic	Frequency (MHz)	SG (dBm)	Cable Loss (dB)	Gain (dBi)	Antenna Polarization	EIRP Level (dBm)	Limit (dBm)	Margin (dB)	Azimuth (deg)
2	5190.0	-54.65	2.00	10.15	Vertical	-46.5	-25.0	21.5	225
3	7785.0	-51.05	2.50	11.35	Vertical	-42.2	-25.0	17.2	180
4	10380.0	-47.05	4.20	12.05	Vertical	-39.2	-25.0	14.2	45
5	12975.0	-47.25	5.20	14.85	Vertical	-37.6	-25.0	12.6	90
6	15570.0	-44.53	5.50	13.23	Vertical	-36.8	-25.0	11.8	225
7	18165.0	-40.45	5.70	12.15	Vertical	-34.0	-25.0	9.0	135
8	20760.0	-40.96	6.30	13.76	Vertical	-33.5	-25.0	8.5	90
9	23355.0	-39.75	6.80	14.05	Vertical	-32.5	-25.0	7.5	135
10	25950.0	-39.44	6.90	14.84	Vertical	-31.5	-25.0	6.5	270

Note: 1.The other Spurious RF Radiated emissions level is no more than noise floor.

2. The worst emission was found in the antenna is vertical position.

LTE Band 38 QPSK 20MHz CH-High, RB 1

Harmonic	Frequency (MHz)	SG (dBm)	Cable Loss (dB)	Gain (dBi)	Antenna Polarization	EIRP Level (dBm)	Limit (dBm)	Margin (dB)	Azimuth (deg)
2	5220.0	-53.85	2.00	10.15	Vertical	-45.7	-25.0	20.7	225
3	7830.0	-50.65	2.50	11.35	Vertical	-41.8	-25.0	16.8	45
4	10440.0	-46.95	4.20	12.05	Vertical	-39.1	-25.0	14.1	90
5	13050.0	-46.85	5.20	14.85	Vertical	-37.2	-25.0	12.2	225
6	15660.0	-42.53	5.50	13.23	Vertical	-34.8	-25.0	9.8	135
7	18270.0	-41.15	5.70	12.15	Vertical	-34.7	-25.0	9.7	90
8	20880.0	-40.96	6.30	13.76	Vertical	-33.5	-25.0	8.5	135
9	23490.0	-40.45	6.80	14.05	Vertical	-33.2	-25.0	8.2	270
10	26100.0	-40.74	6.90	14.84	Vertical	-32.8	-25.0	7.8	225

Note: 1.The other Spurious RF Radiated emissions level is no more than noise floor.

2. The worst emission was found in the antenna is vertical position.

5 Main Test Instruments

Name	Type	Manufacturer	Serial Number	Calibration Date	Expiration Time
Base Station Simulator	CMW500	R&S	113645	2016-05-21	2017-05-20
Power Splitter	SHX-GF2-2-13	Hua Xiang	10120101	NA	NA
Universal Radio Communication Tester	E5515C	Agilent	MY48367192	2016-05-21	2017-05-20
Spectrum Analyzer	N9010A	Agilent	MY47191109	2016-05-21	2017-05-20
Signal Analyzer	FSV30	R&S	100815	2016-12-16	2017-12-15
Signal generator	SMB 100A	R&S	102594	2016-05-22	2017-05-21
Signal generator	SMR27	R&S	100365	2016-05-22	2017-05-21
EMI Test Receiver	ESCI	R&S	100948	2016-06-01	2017-05-31
Trilog Antenna	VUBL 9163	SCHWARZBECK	9163-201	2014-12-06	2017-12-05
Trilog Antenna	VUBL 9163	SCHWARZBECK	9163-391	2014-12-06	2017-12-05
Horn Antenna	HF907	R&S	100126	2014-12-06	2017-12-05
Horn Antenna	HF907	R&S	100125	2014-12-06	2017-12-05
Horn Antenna	3160-09	ETS-Lindgren	00102643	2015-01-30	2018-01-29
Horn Antenna	3160-09	ETS-Lindgren	00102644	2014-12-06	2017-12-05
Climatic Chamber	PT-30B	Re Ce	20101891	2016-07-17	2017-07-16
RF Cable	SMA 15cm	Agilent	0001	2017-02-06	2017-08-05