

**Appendix B. SAR Measurement Plots**

Table of contents
GSM850 Head
GSM850 Body
GSM1900 Head
GSM1900 Body
UMTS Band V Head
UMTS Band V Body
UMTS Band IV Head
UMTS Band IV Body
UMTS Band II Head
UMTS Band II Body
LTE Band IV Head
LTE Band IV Body
LTE Band II Head
LTE Band II Body
LTE Band VII Head
LTE Band VII Body
WiFi 2.4G Head
WiFi 2.4G Body
WiFi 5G Head
WiFi 5G Body

Test Laboratory: HUAWEI SAR/HAC Lab

T1-821L GSM850 190CH Right hand touch cheek

DUT: T1-821L; Type: HUAWEI MediaPad T1 8.0 Pro; Serial: SAR2

Communication System: UID 0, HW-GSM/GPRS/EGPRS-ITS (0); Frequency: 836.6 MHz; Duty Cycle: 1:8.30042

Medium parameters used: $f = 837$ MHz; $\sigma = 0.886$ S/m; $\epsilon_r = 39.926$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY Configuration:

- Probe: EX3DV4 - SN3898; ConvF(9.85, 9.85, 9.85); Calibrated: 2014-3-10;
- Sensor-Surface: 3mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE4 Sn852; Calibrated: 2014-4-30
- Phantom: SAM4; Type: SAM; Serial: TP-1620
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Head/Area Scan (11x17x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 0.493 W/kg


Configuration/Head/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 12.71 V/m; Power Drift = -0.14 dB

Peak SAR (extrapolated) = 0.784 W/kg

SAR(1 g) = 0.379 W/kg; SAR(10 g) = 0.199 W/kg

Maximum value of SAR (measured) = 0.501 W/kg

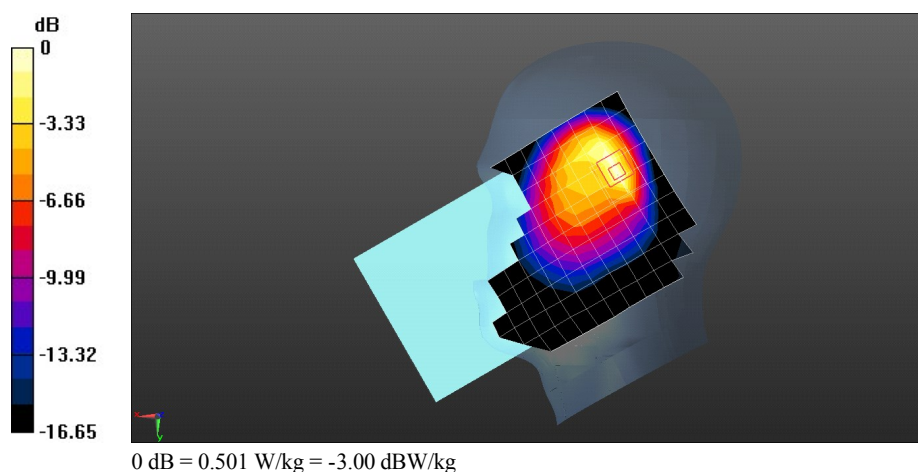

Test Laboratory: HUAWEI SAR/HAC Lab

T1-821L GSM850 128CH Back Side with Headset 0mm

DUT: T1-821L; Type: HUAWEI MediaPad T1 8.0 Pro; Serial: SAR2

Communication System: UID 0, HW-GSM\GPRS\EGPRS-1TS (0); Frequency: 824.2 MHz; Duty Cycle: 1:8.30042

Medium parameters used (interpolated): $f = 824.2$ MHz; $\sigma = 0.942$ S/m; $\epsilon_r = 53.691$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3898; ConvF(9.63, 9.63, 9.63); Calibrated: 2014-3-10;
- Sensor-Surface: 3mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE4 Sn852; Calibrated: 2014-4-30
- Phantom: ELI v5.0; Type: ELI; Serial: TP:1111
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Body/Area Scan (11x16x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 1.14 W/kg

Configuration/Body/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm


Reference Value = 1.113 V/m; Power Drift = 0.18 dB

Peak SAR (extrapolated) = 1.88 W/kg

SAR(1 g) = 0.989 W/kg; SAR(10 g) = 0.566 W/kg

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 1.27 W/kg

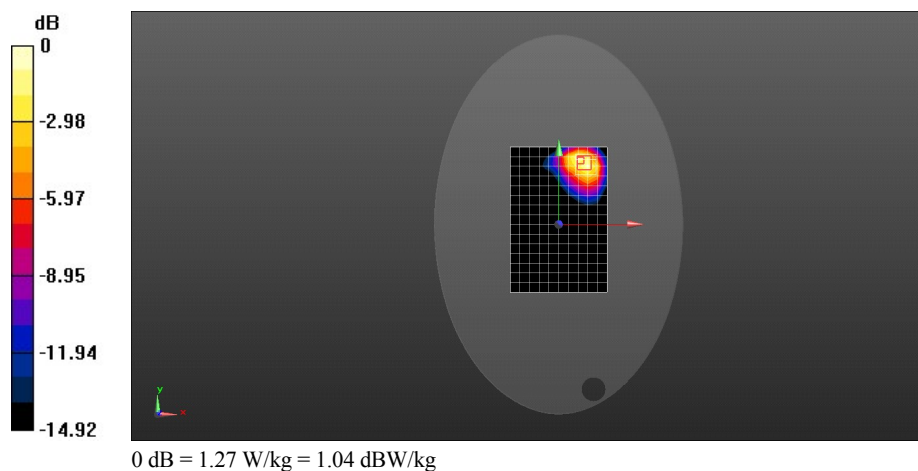

Test Laboratory: HUAWEI SAR/HAC Lab

T1-821L GSM1900 661CH Right hand touch check

DUT: T1-821L; Type: HUAWEI MediaPad T1 8.0 Pro; Serial: SAR2

Communication System: UID 0, HW-GSM\GPRS\EGPRS-1TS (0); Frequency: 1880 MHz; Duty Cycle: 1:8.30042

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.397$ S/m; $\epsilon_r = 40.098$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY Configuration:

- Probe: EX3DV4 - SN3898; ConvF(8.2, 8.2, 8.2); Calibrated: 2014-3-10;
- Sensor-Surface: 3mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE4 Sn852; Calibrated: 2014-4-30
- Phantom: SAM4; Type: SAM; Serial: TP-1620
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Head/Area Scan (11x17x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 0.488 W/kg


Configuration/Head/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 4.399 V/m; Power Drift = 0.18 dB

Peak SAR (extrapolated) = 0.788 W/kg

SAR(1 g) = 0.424 W/kg; SAR(10 g) = 0.200 W/kg

Maximum value of SAR (measured) = 0.562 W/kg

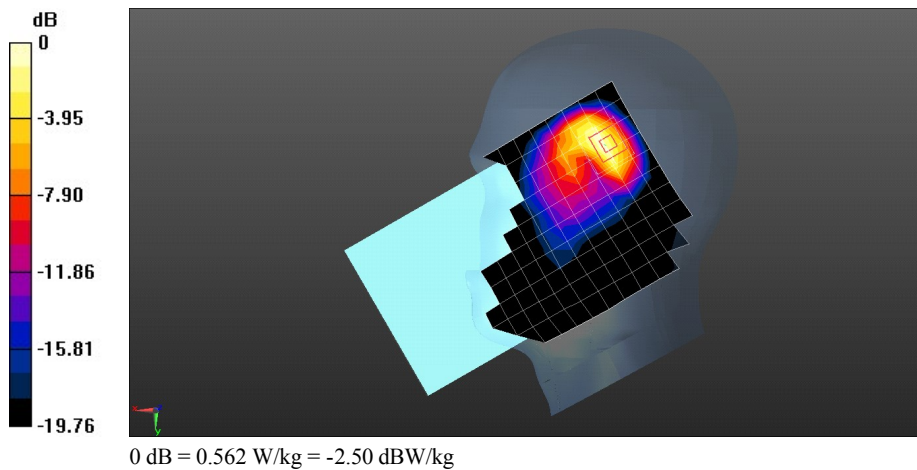

Test Laboratory: HUAWEI SAR/HAC Lab

T1-821L GSM1900 GPRS 2TS 661CH Back Side 0mm

DUT: T1-821L; Type: HUAWEI MediaPad T1 8.0 Pro; Serial: SAR2

Communication System: UID 0, HW-GSM\GPRS\EGPRS-2TS (0); Frequency: 1880 MHz;Duty Cycle: 1:4.10015

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.514$ S/m; $\epsilon_r = 51.715$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3898; ConvF(7.83, 7.83, 7.83); Calibrated: 2014-3-10;
- Sensor-Surface: 3mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE4 Sn852; Calibrated: 2014-4-30
- Phantom: ELI v5.0; Type: ELI; Serial: TP:1111
- DASY52 52.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Body/Area Scan (14x21x1): Measurement grid: $dx=12$ mm, $dy=12$ mm

Maximum value of SAR (measured) = 0.763 W/kg


Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 0.8760 V/m; Power Drift = -0.01 dB

Peak SAR (extrapolated) = 1.53 W/kg

SAR(1 g) = 0.704 W/kg; SAR(10 g) = 0.334 W/kg

Maximum value of SAR (measured) = 0.960 W/kg

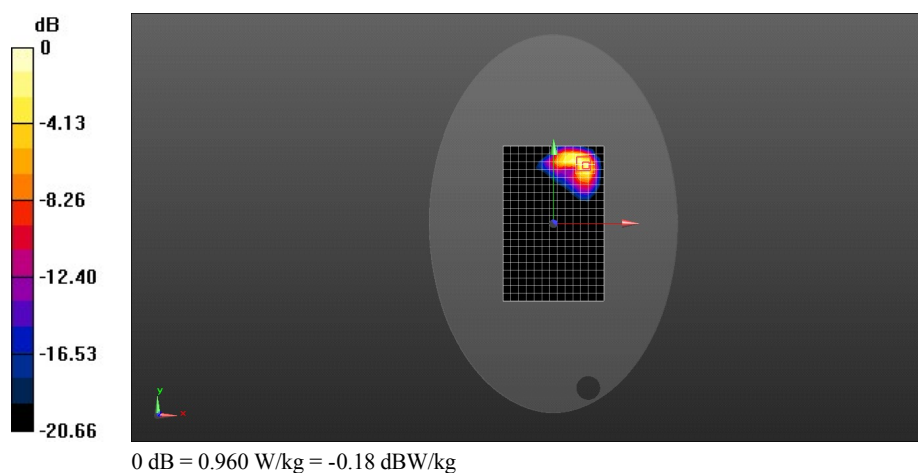

Test Laboratory: HUAWEI SAR/HAC Lab

T1-821L UMTS Band V 4132CH Right hand touch cheek

DUT: T1-821L; Type: HUAWEI MediaPad T1 8.0 Pro; Serial: SAR2

Communication System: UID 0, HW-UMTS-FDD(WCDMA) (0); Frequency: 826.4 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 826.4$ MHz; $\sigma = 0.874$ S/m; $\epsilon_r = 40.037$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY Configuration:

- Probe: EX3DV4 - SN3898; ConvF(9.85, 9.85, 9.85); Calibrated: 2014-3-10;
- Sensor-Surface: 3mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE4 Sn852; Calibrated: 2014-4-30
- Phantom: SAM4; Type: SAM; Serial: TP-1620
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Head/Area Scan (11x17x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.633 W/kg

Configuration/Head/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm


Reference Value = 13.81 V/m; Power Drift = -0.09 dB

Peak SAR (extrapolated) = 1.00 W/kg

SAR(1 g) = 0.484 W/kg; SAR(10 g) = 0.253 W/kg

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.642 W/kg

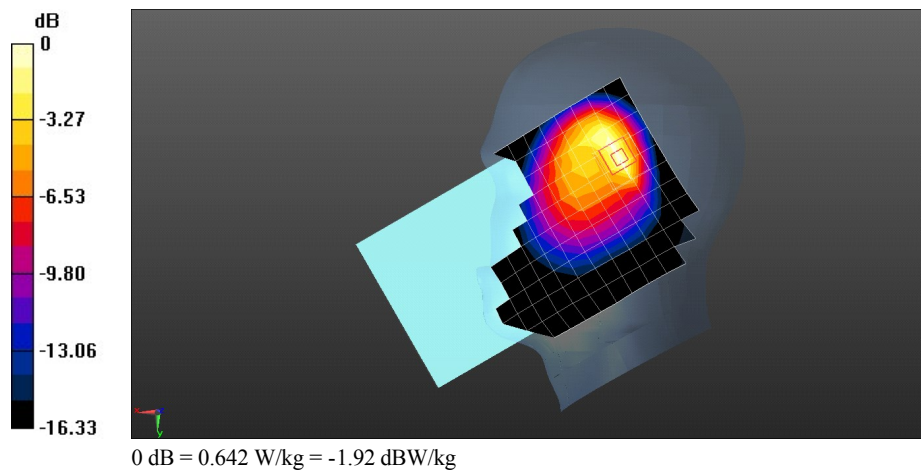

Test Laboratory: HUAWEI SAR/HAC Lab

T1-821L UMTS Band V 4132CH Back side 0mm

DUT: T1-821L; Type: HUAWEI MediaPad T1 8.0 Pro; Serial: SAR2

Communication System: UID 0, HW-UMTS-FDD(WCDMA) (0); Frequency: 826.4 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 826.4$ MHz; $\sigma = 0.945$ S/m; $\epsilon_r = 53.662$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3898; ConvF(9.63, 9.63, 9.63); Calibrated: 2014-3-10;
- Sensor-Surface: 3mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE4 Sn852; Calibrated: 2014-4-30
- Phantom: ELI v5.0; Type: ELI; Serial: TP:1111
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Body/Area Scan (12x18x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.903 W/kg

Configuration/Body/Zoom Scan (6x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm


Reference Value = 1.347 V/m; Power Drift = 0.09 dB

Peak SAR (extrapolated) = 1.56 W/kg

SAR(1 g) = 0.796 W/kg; SAR(10 g) = 0.455 W/kg

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 1.03 W/kg

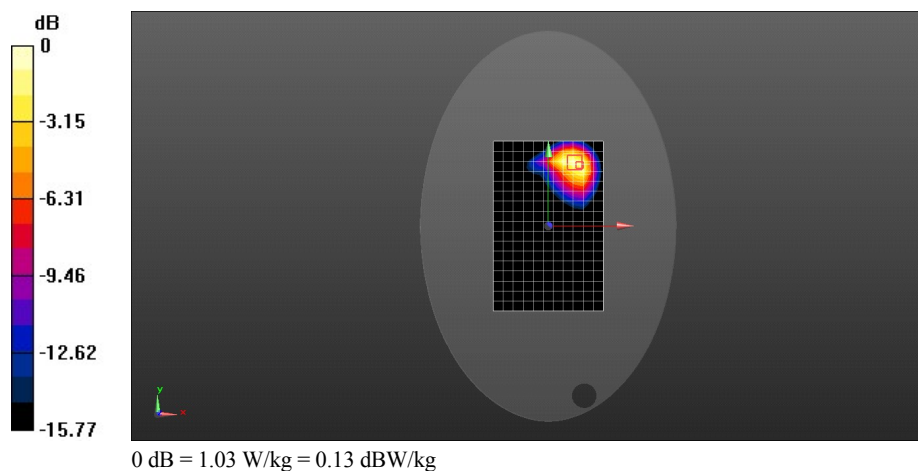

Test Laboratory: HUAWEI SAR/HAC Lab

T1-821L UMTS Band IV 1513CH Right hand touch check

DUT: T1-821L; Type: HUAWEI MediaPad T1 8.0 Pro; Serial: SAR2

Communication System: UID 0, HW-UMTS-FDD(WCDMA) (0); Frequency: 1752.6 MHz;Duty Cycle: 1:1

Medium parameters used: $f = 1753$ MHz; $\sigma = 1.373$ S/m; $\epsilon_r = 38.773$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY Configuration:

- Probe: EX3DV4 - SN3898; ConvF(8.38, 8.38, 8.38); Calibrated: 2014-3-10;
- Sensor-Surface: 3mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE4 Sn852; Calibrated: 2014-4-30
- Phantom: SAM4; Type: SAM; Serial: TP-1620
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Head/Area Scan (11x17x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 0.853 W/kg


Configuration/Head/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 7.725 V/m; Power Drift = 0.04 dB

Peak SAR (extrapolated) = 1.32 W/kg

SAR(1 g) = 0.692 W/kg; SAR(10 g) = 0.344 W/kg

Maximum value of SAR (measured) = 0.821 W/kg

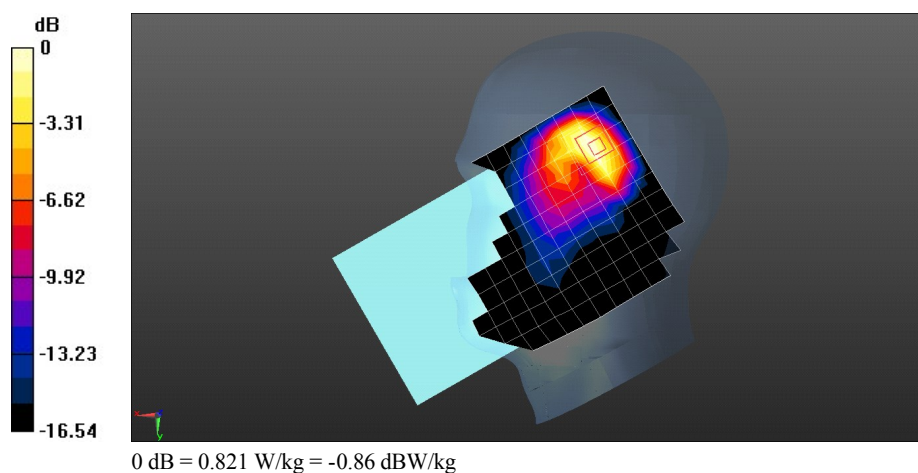

Test Laboratory: HUAWEI SAR/HAC Lab

T1-821L UMTS Band IV 1513CH Back Side 0mm

DUT: T1-821L; Type: HUAWEI MediaPad T1 8.0 Pro; Serial: SAR2

Communication System: UID 0, HW-UMTS-FDD(WCDMA) (0); Frequency: 1752.6 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1753$ MHz; $\sigma = 1.5$ S/m; $\epsilon_r = 52.979$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3898; ConvF(8.16, 8.16, 8.16); Calibrated: 2014-3-10;
- Sensor-Surface: 3mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE4 Sn852; Calibrated: 2014-4-30
- Phantom: ELI v5.0; Type: ELI; Serial: TP:1111
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Body/Area Scan (12x18x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 0.968 W/kg


Configuration/Body/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 0.3200 V/m; Power Drift = 0.02 dB

Peak SAR (extrapolated) = 1.69 W/kg

SAR(1 g) = 0.838 W/kg; SAR(10 g) = 0.418 W/kg

Maximum value of SAR (measured) = 1.09 W/kg

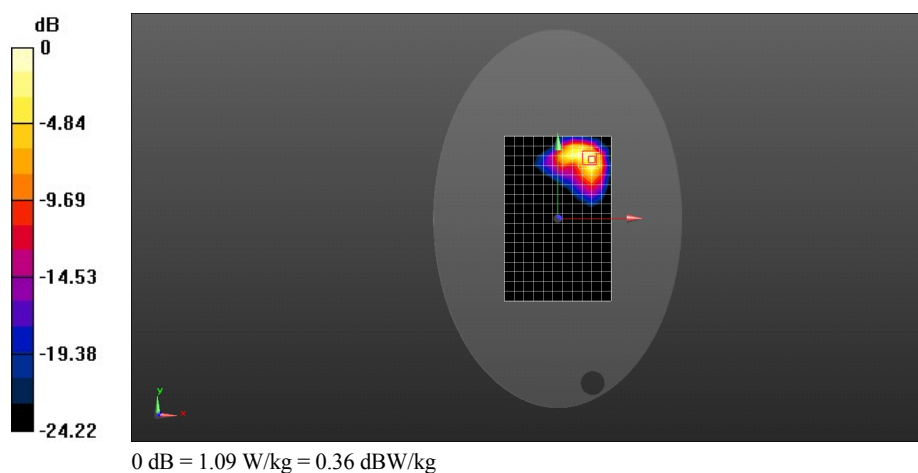

Test Laboratory: HUAWEI SAR/HAC Lab

T1-821L UMTS Band II 9400CH Right hand touch cheek

DUT: T1-821L; Type: HUAWEI MediaPad T1 8.0 Pro; Serial: SAR2

Communication System: UID 0, HW-UMTS-FDD(WCDMA) (0); Frequency: 1880 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.397$ S/m; $\epsilon_r = 40.098$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY Configuration:

- Probe: EX3DV4 - SN3898; ConvF(8.2, 8.2, 8.2); Calibrated: 2014-3-10;
- Sensor-Surface: 3mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE4 Sn852; Calibrated: 2014-4-30
- Phantom: SAM4; Type: SAM; Serial: TP-1620
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Head/Area Scan (11x17x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 0.857 W/kg


Configuration/Head/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 6.957 V/m; Power Drift = 0.11 dB

Peak SAR (extrapolated) = 1.99 W/kg

SAR(1 g) = 1.03 W/kg; SAR(10 g) = 0.485 W/kg

Maximum value of SAR (measured) = 1.18 W/kg

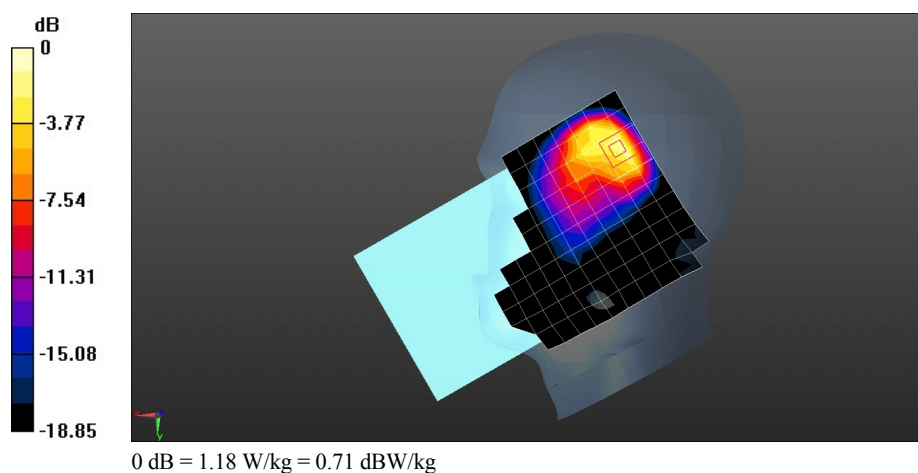

Test Laboratory: HUAWEI SAR/HAC Lab

T1-821L UMTS Band II 9400CH Back side with Headset 0mm

DUT: T1-821L; Type: HUAWEI MediaPad T1 8.0 Pro; Serial: SAR2

Communication System: UID 0, HW-UMTS-FDD(WCDMA) (0); Frequency: 1880 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.514$ S/m; $\epsilon_r = 51.715$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3898; ConvF(7.83, 7.83, 7.83); Calibrated: 2014-3-10;
- Sensor-Surface: 3mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE4 Sn852; Calibrated: 2014-4-30
- Phantom: ELI v5.0; Type: ELI; Serial: TP:1111
- DASY52 52.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Body/Area Scan (11x16x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 0.707 W/kg


Configuration/Body/Zoom Scan (6x6x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 0.1740 V/m; Power Drift = 0.18 dB

Peak SAR (extrapolated) = 1.95 W/kg

SAR(1 g) = 0.942 W/kg; SAR(10 g) = 0.445 W/kg

Maximum value of SAR (measured) = 1.21 W/kg

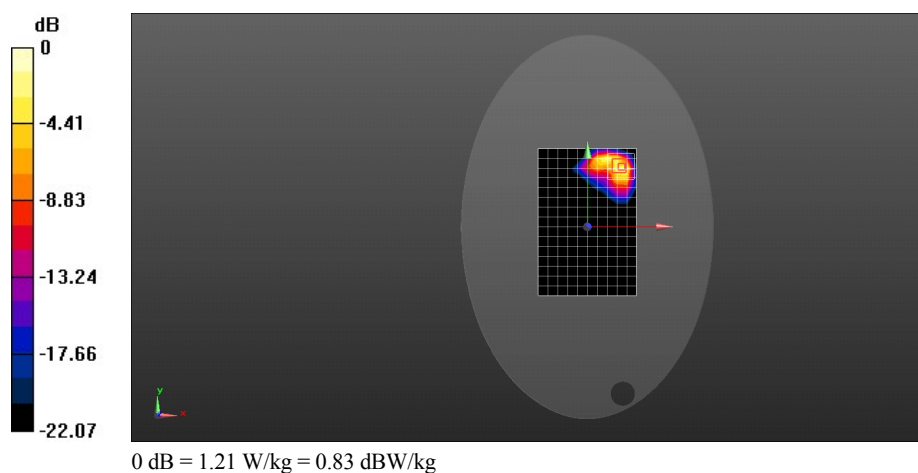

Test Laboratory: HUAWEI SAR/HAC Lab

T1-821L LTE Band IV 20M QPSK 1RB#50 20300CH Right hand touch cheek-Repeated

DUT: T1-821L; Type: HUAWEI MediaPad T1 8.0 Pro; Serial: SAR2

Communication System: UID 0, LTE-FDD (SC-FDMA, 20MHz, QPSK/16-QAM) (0); Frequency: 1745 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1745$ MHz; $\sigma = 1.364$ S/m; $\epsilon_r = 38.805$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY Configuration:

- Probe: EX3DV4 - SN3898; ConvF(8.38, 8.38, 8.38); Calibrated: 2014-3-10;
- Sensor-Surface: 3mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE4 Sn852; Calibrated: 2014-4-30
- Phantom: SAM4; Type: SAM; Serial: TP-1620
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Head/Area Scan (11x17x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 1.36 W/kg


Configuration/Head/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 10.27 V/m; Power Drift = -0.08 dB

Peak SAR (extrapolated) = 2.10 W/kg

SAR(1 g) = 1.08 W/kg; SAR(10 g) = 0.530 W/kg

Maximum value of SAR (measured) = 1.32 W/kg

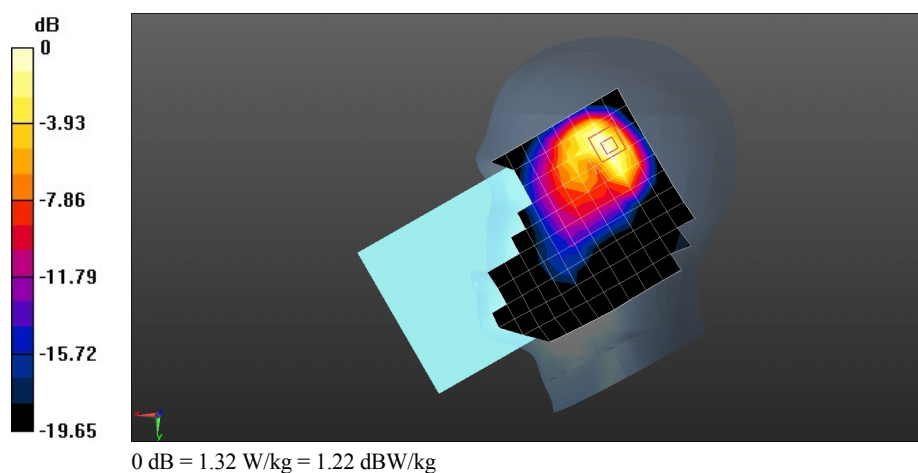

Test Laboratory: HUAWEI SAR/HAC Lab

T1-821L LTE Band IV 20M QPSK 1RB#50 20300CH Back side 0mm-Repeated

DUT: T1-821L; Type: HUAWEI MediaPad T1 8.0 Pro; Serial: SAR2

Communication System: UID 0, LTE-FDD (SC-FDMA, 20MHz, QPSK/16-QAM) (0); Frequency: 1745 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1745$ MHz; $\sigma = 1.497$ S/m; $\epsilon_r = 52.99$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3898; ConvF(8.16, 8.16, 8.16); Calibrated: 2014-3-10;
- Sensor-Surface: 3mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE4 Sn852; Calibrated: 2014-4-30
- Phantom: ELI v5.0; Type: ELI; Serial: TP:1111
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Body/Area Scan (11x16x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 1.09 W/kg


Configuration/Body/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 0.2690 V/m; Power Drift = 0.13 dB

Peak SAR (extrapolated) = 2.22 W/kg

SAR(1 g) = 1.08 W/kg; SAR(10 g) = 0.515 W/kg

Maximum value of SAR (measured) = 1.49 W/kg

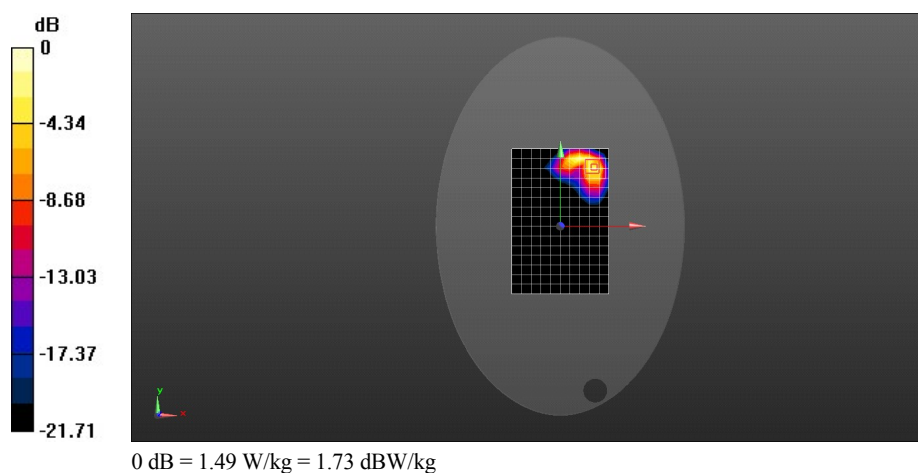

Test Laboratory: HUAWEI SAR/HAC Lab

T1-821L LTE Band II 20M QPSK 1RB#50 18700CH Right hand touch check

DUT: T1-821L; Type: HUAWEI MediaPad T1 8.0 Pro; Serial: SAR2

Communication System: UID 0, LTE-FDD (SC-FDMA, 20MHz, QPSK/16-QAM) (0); Frequency: 1860 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1860$ MHz; $\sigma = 1.358$ S/m; $\epsilon_r = 40.038$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY Configuration:

- Probe: EX3DV4 - SN3898; ConvF(8.2, 8.2, 8.2); Calibrated: 2014-3-10;
- Sensor-Surface: 3mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE4 Sn852; Calibrated: 2014-4-30
- Phantom: SAM4; Type: SAM; Serial: TP-1620
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Head/Area Scan (11x17x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 0.865 W/kg


Configuration/Head/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 9.222 V/m; Power Drift = 0.05 dB

Peak SAR (extrapolated) = 1.47 W/kg

SAR(1 g) = 0.786 W/kg; SAR(10 g) = 0.378 W/kg

Maximum value of SAR (measured) = 1.01 W/kg

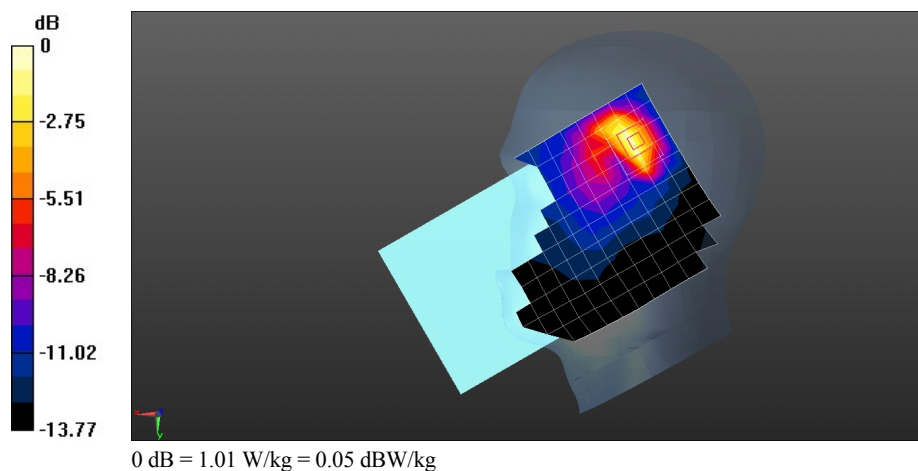

Test Laboratory: HUAWEI SAR/HAC Lab

T1-821L LTE Band II 20M QPSK 1RB#50 18700CH Back side 0mm

DUT: T1-821L; Type: HUAWEI MediaPad T1 8.0 Pro; Serial: SAR2

Communication System: UID 0, LTE-FDD (SC-FDMA, 20MHz, QPSK/16-QAM) (0); Frequency: 1860 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1860$ MHz; $\sigma = 1.496$ S/m; $\epsilon_r = 51.741$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3898; ConvF(7.83, 7.83, 7.83); Calibrated: 2014-3-10;
- Sensor-Surface: 3mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE4 Sn852; Calibrated: 2014-4-30
- Phantom: ELI v5.0; Type: ELI; Serial: TP:1111
- DASY52 52.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Body/Area Scan (14x21x1): Measurement grid: $dx=12$ mm, $dy=12$ mm

Maximum value of SAR (measured) = 0.817 W/kg


Configuration/Body/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 0.8940 V/m; Power Drift = 0.16 dB

Peak SAR (extrapolated) = 1.46 W/kg

SAR(1 g) = 0.715 W/kg; SAR(10 g) = 0.335 W/kg

Maximum value of SAR (measured) = 0.952 W/kg

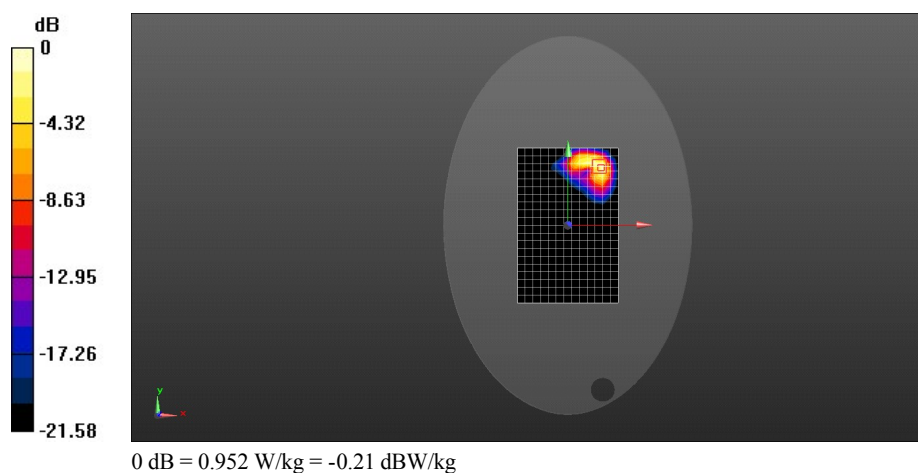

Test Laboratory: HUAWEI SAR/HAC Lab

T1-821L LTE Band VII 20M QPSK 1RB#50 20850CH Right Hand Tilt 15 degree-repeated

DUT: T1-821L; Type: HUAWEI MediaPad T1 8.0 Pro; Serial: SAR2

Communication System: UID 0, LTE-FDD (SC-FDMA, 20MHz, QPSK/16-QAM) (0); Frequency: 2510 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 2510$ MHz; $\sigma = 1.849$ S/m; $\epsilon_r = 39.199$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY Configuration:

- Probe: EX3DV4 - SN3898; ConvF(7.34, 7.34, 7.34); Calibrated: 2014-3-10;
- Sensor-Surface: 3mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE4 Sn852; Calibrated: 2014-4-30
- Phantom: SAM3; Type: SAM; Serial: TP-1597
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Head/Area Scan (14x21x1): Measurement grid: $dx=12$ mm, $dy=12$ mm

Maximum value of SAR (measured) = 1.06 W/kg


Configuration/Head/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 7.199 V/m; Power Drift = -0.02 dB

Peak SAR (extrapolated) = 2.04 W/kg

SAR(1 g) = 0.906 W/kg; SAR(10 g) = 0.397 W/kg

Maximum value of SAR (measured) = 1.21 W/kg

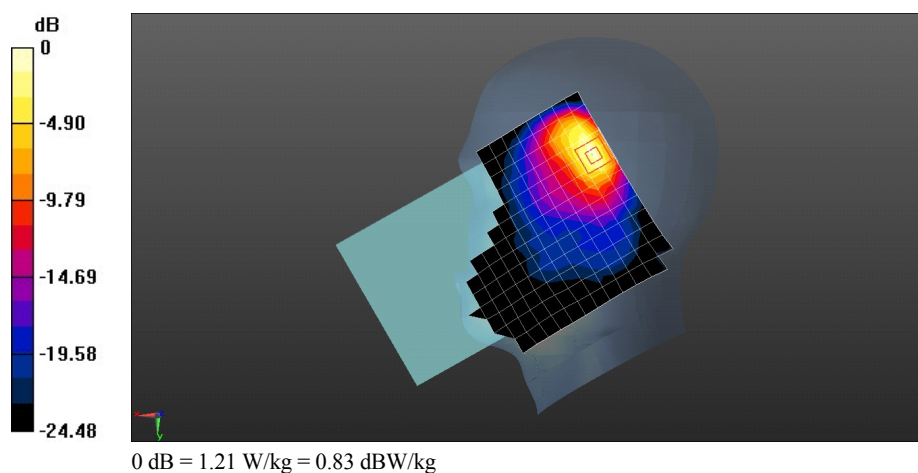

Test Laboratory: HUAWEI SAR/HAC Lab

T1-821L LTE Band VII 20M QPSK 1RB#50 20850CH Back side 0mm

DUT: T1-821L; Type: HUAWEI MediaPad T1 8.0 Pro; Serial: SAR2

Communication System: UID 0, LTE-FDD (SC-FDMA, 20MHz, QPSK/16-QAM) (0); Frequency: 2510 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 2510$ MHz; $\sigma = 2.112$ S/m; $\epsilon_r = 50.92$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3898; ConvF(7.06, 7.06, 7.06); Calibrated: 2014-3-10;
- Sensor-Surface: 3mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE4 Sn852; Calibrated: 2014-4-30
- Phantom: ELI v5.0; Type: ELI; Serial: TP:1111
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Body/Area Scan (14x21x1): Measurement grid: $dx=12$ mm, $dy=12$ mm

Maximum value of SAR (measured) = 0.690 W/kg


Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 4.247 V/m; Power Drift = 0.17 dB

Peak SAR (extrapolated) = 1.65 W/kg

SAR(1 g) = 0.741 W/kg; SAR(10 g) = 0.325 W/kg

Maximum value of SAR (measured) = 0.983 W/kg

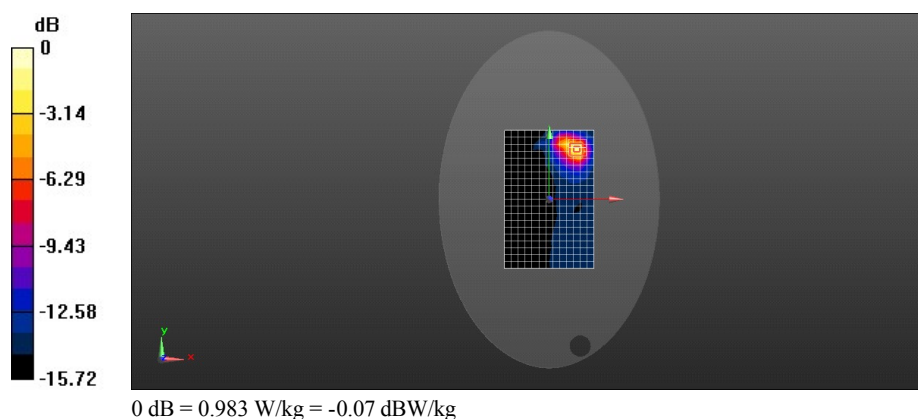

Test Laboratory: HUAWEI SAR/HAC Lab

T1-821L LTE Band VII 20M QPSK 1RB#99 21350CH Rightside 0mm-repeated

DUT: T1-821L; Type: HUAWEI MediaPad T1 8.0 Pro; Serial: SAR2

Communication System: UID 0, LTE-FDD (SC-FDMA, 20MHz, QPSK/16-QAM) (0); Frequency: 2560 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 2560$ MHz; $\sigma = 2.168$ S/m; $\epsilon_r = 50.784$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3898; ConvF(7.06, 7.06, 7.06); Calibrated: 2014-3-10;
- Sensor-Surface: 3mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE4 Sn852; Calibrated: 2014-4-30
- Phantom: ELI v5.0; Type: ELI; Serial: TP:1111
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Body/Area Scan (9x18x1): Measurement grid: $dx=12$ mm, $dy=12$ mm

Maximum value of SAR (measured) = 1.04 W/kg


Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 5.685 V/m; Power Drift = -0.05 dB

Peak SAR (extrapolated) = 2.31 W/kg

SAR(1 g) = 0.992 W/kg; SAR(10 g) = 0.408 W/kg

Maximum value of SAR (measured) = 1.37 W/kg

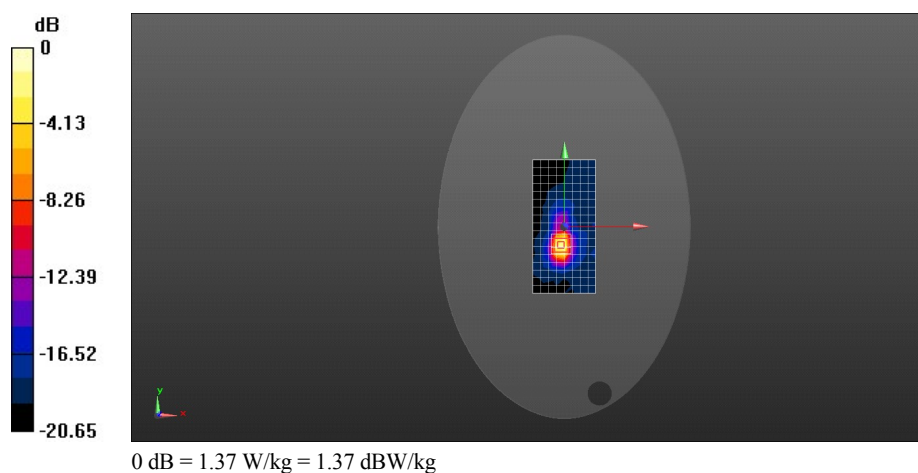

Test Laboratory: HUAWEI SAR/HAC Lab

T1-821L WIFI 2.4G 802.11b 11CH Left Hand Tilted 15 degree

DUT: T1-821L; Type: HUAWEI MediaPad T1 8.0 Pro; Serial: SAR2

Communication System: UID 0, WiFi(802.11a/b/g/n) (0); Frequency: 2462 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 2462$ MHz; $\sigma = 1.814$ S/m; $\epsilon_r = 39.664$; $\rho = 1000$ kg/m³

Phantom section: Left Section

DASY Configuration:

- Probe: EX3DV4 - SN3898; ConvF(7.55, 7.55, 7.55); Calibrated: 2014-3-10;
- Sensor-Surface: 3mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE4 Sn852; Calibrated: 2014-4-30
- Phantom: SAM4; Type: SAM; Serial: TP-1620
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Head/Area Scan (14x22x1): Measurement grid: $dx=12$ mm, $dy=12$ mm

Maximum value of SAR (measured) = 0.0170 W/kg


Configuration/Head/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 1.910 V/m; Power Drift = 0.11 dB

Peak SAR (extrapolated) = 0.0470 W/kg

SAR(1 g) = 0.014 W/kg; SAR(10 g) = 0.00529 W/kg

Maximum value of SAR (measured) = 0.0188 W/kg

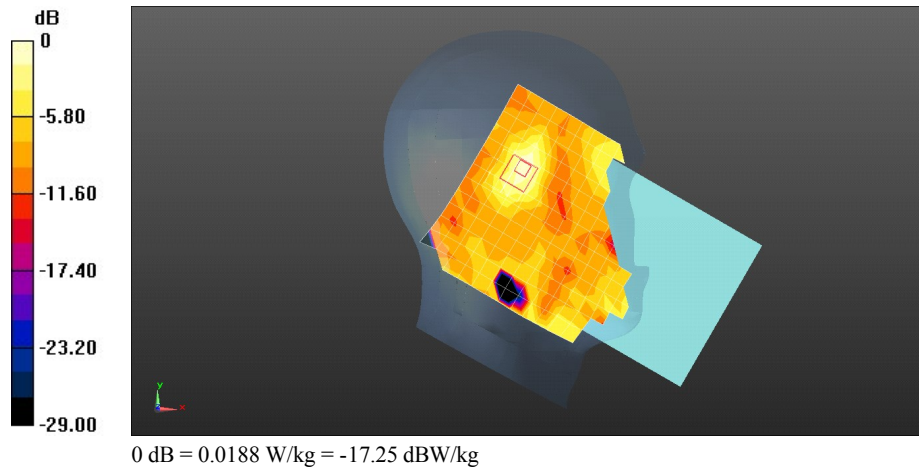

Test Laboratory: HUAWEI SAR/HAC Lab

T1-821L WIFI 2.4G 802.11b 6CH Back side 0mm

DUT: T1-821L; Type: HUAWEI MediaPad T1 8.0 Pro; Serial: SAR2

Communication System: UID 0, WiFi(802.11a/b/g/n) (0); Frequency: 2437 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 2437$ MHz; $\sigma = 1.969$ S/m; $\epsilon_r = 50.393$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3898; ConvF(7.49, 7.49, 7.49); Calibrated: 2014-3-10;
- Sensor-Surface: 3mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE4 Sn852; Calibrated: 2014-4-30
- Phantom: ELI v5.0; Type: ELI; Serial: TP:1111
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Body/Area Scan (12x20x1): Measurement grid: $dx=12$ mm, $dy=12$ mm

Maximum value of SAR (measured) = 1.35 W/kg


Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 0.8800 V/m; Power Drift = 0.16 dB

Peak SAR (extrapolated) = 3.55 W/kg

SAR(1 g) = 1.28 W/kg; SAR(10 g) = 0.482 W/kg

Maximum value of SAR (measured) = 1.82 W/kg

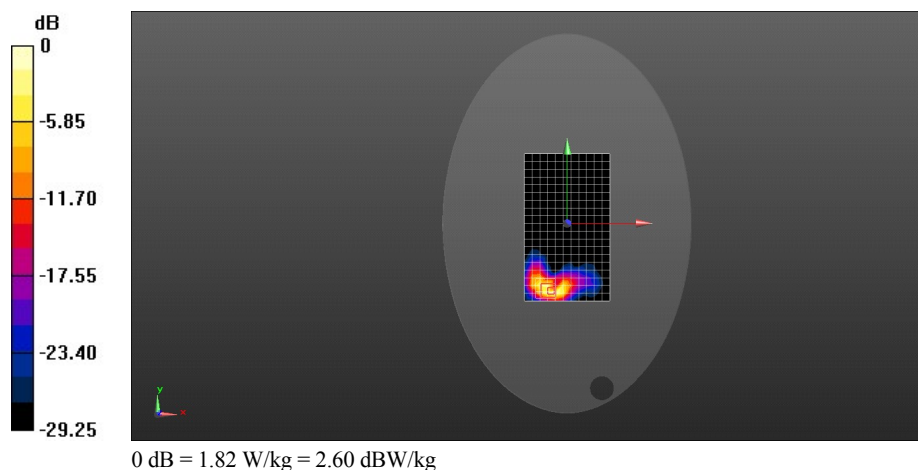

Test Laboratory: HUAWEI SAR/HAC Lab

T1-821L WiFi 802.11a 48CH Left hand touch cheek

DUT: T1-821L; Type: HUAWEI MediaPad T1 8.0 Pro; Serial: SAR1

Communication System: UID 0, WiFi(802.11a/b/g/n) (0); Frequency: 5240 MHz;Duty Cycle: 1:1

Medium parameters used: $f = 5240$ MHz; $\sigma = 4.609$ S/m; $\epsilon_r = 37.416$; $\rho = 1000$ kg/m³

Phantom section: Left Section

DASY Configuration:

- Probe: EX3DV4 - SN3898; ConvF(5.52, 5.52, 5.52); Calibrated: 2014-3-10;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = 1.0, 25.0$
- Electronics: DAE4 Sn852; Calibrated: 2014-4-30
- Phantom: SAM4; Type: SAM; Serial: TP-1620
- DASY52 52.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Head/Area Scan (17x25x1): Measurement grid: $dx=10$ mm, $dy=10$ mm

Maximum value of SAR (measured) = 0.0455 W/kg


Configuration/Head/Zoom Scan (8x8x7)/Cube 0: Measurement grid: $dx=4$ mm, $dy=4$ mm, $dz=1.4$ mm

Reference Value = 0.8620 V/m; Power Drift = -0.05 dB

Peak SAR (extrapolated) = 126 W/kg

SAR(1 g) = 0.00988 W/kg; SAR(10 g) = 0.00116 W/kg

Maximum value of SAR (measured) = 0.167 W/kg

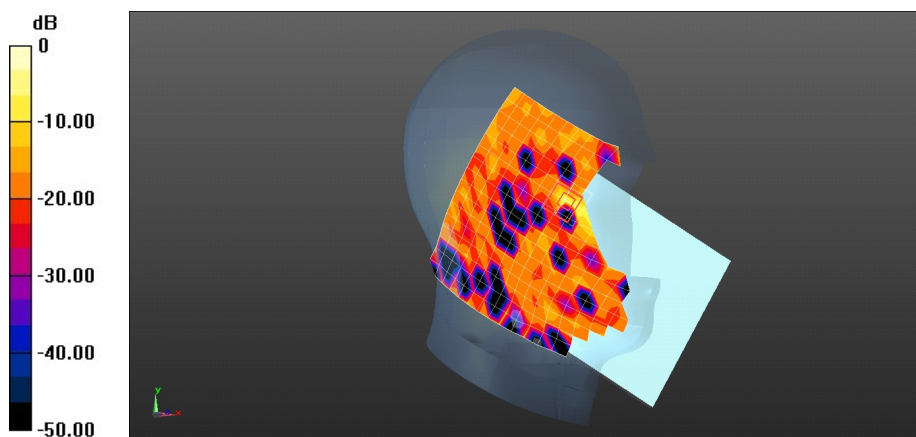

0 dB = 0.167 W/kg = -7.78 dBW/kg

Test Laboratory: HUAWEI SAR/HAC Lab

T1-821L WiFi 802.11a 48CH Back Side 0mm

DUT: T1-821L; Type: HUAWEI MediaPad T1 8.0 Pro; Serial: SAR1

Communication System: UID 0, WiFi(802.11a/b/g/n) (0); Frequency: 5240 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 5240$ MHz; $\sigma = 5.227$ S/m; $\epsilon_r = 50.749$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3898; ConvF(4.8, 4.8, 4.8); Calibrated: 2014-3-10;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = 1.0, 25.0$
- Electronics: DAE4 Sn852; Calibrated: 2014-4-30
- Phantom: ELI v5.0; Type: ELI; Serial: TP:1111
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Body/Area Scan (17x25x1): Measurement grid: $dx=10$ mm, $dy=10$ mm

Maximum value of SAR (measured) = 1.06 W/kg


Configuration/Body/Zoom Scan (8x8x7)/Cube 0: Measurement grid: $dx=4$ mm, $dy=4$ mm, $dz=1.4$ mm

Reference Value = 0 V/m; Power Drift = 0.00 dB

Peak SAR (extrapolated) = 2.15 W/kg

SAR(1 g) = 0.419 W/kg; SAR(10 g) = 0.113 W/kg

Maximum value of SAR (measured) = 1.22 W/kg

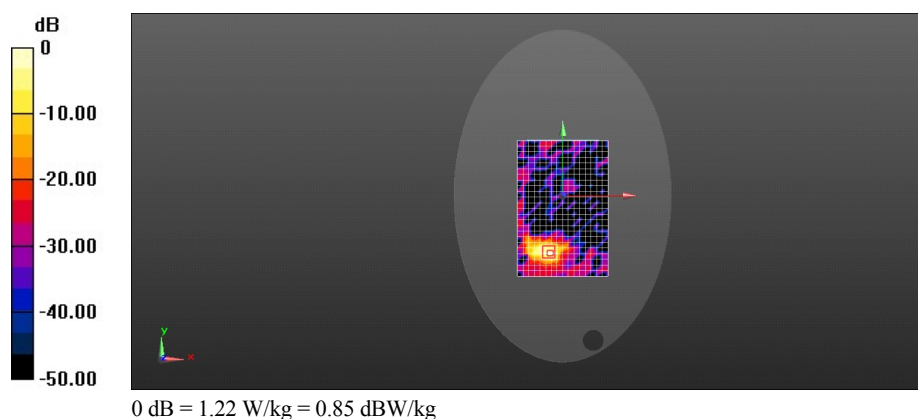

Test Laboratory: HUAWEI SAR/HAC Lab

T1-821L WiFi 802.11a 140CH Left Side 0mm

DUT: T1-821L; Type: HUAWEI MediaPad T1 8.0 Pro; Serial: SAR1

Communication System: UID 0, WiFi(802.11a/b/g/n) (0); Frequency: 5700 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 5700$ MHz; $\sigma = 5.78$ S/m; $\epsilon_r = 49.35$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3898; ConvF(4.22, 4.22, 4.22); Calibrated: 2014-3-10;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = 1.0, 25.0$
- Electronics: DAE4 Sn852; Calibrated: 2014-4-30
- Phantom: ELI v5.0; Type: ELI; Serial: TP:1111
- DASY52 52.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Body/Area Scan (5x15x1): Measurement grid: $dx=10$ mm, $dy=10$ mm

Maximum value of SAR (measured) = 3.55 W/kg


Configuration/Body/Zoom Scan (8x8x7)/Cube 0: Measurement grid: $dx=4$ mm, $dy=4$ mm, $dz=1.4$ mm

Reference Value = 1.830 V/m; Power Drift = -0.19 dB

Peak SAR (extrapolated) = 7.58 W/kg

SAR(1 g) = 1.27 W/kg; SAR(10 g) = 0.249 W/kg

Maximum value of SAR (measured) = 3.56 W/kg

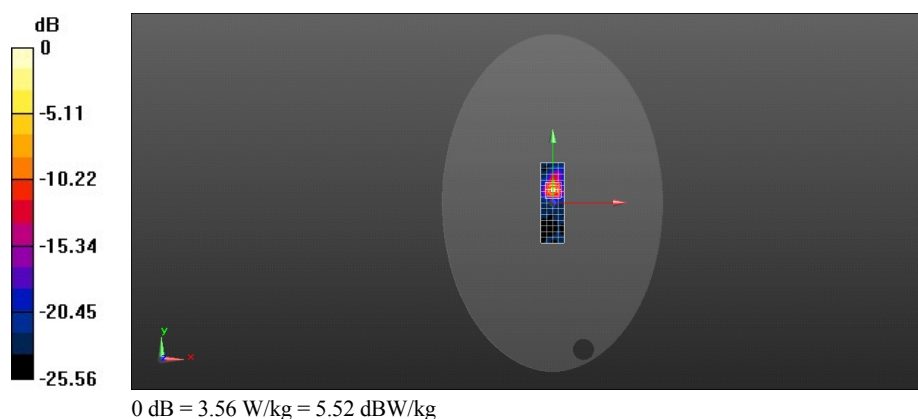

Test Laboratory: HUAWEI SAR/HAC Lab

T1-821L WiFi 802.11a 108CH Left Side 0mm

DUT: T1-821L; Type: HUAWEI MediaPad T1 8.0 Pro; Serial: SAR1

Communication System: UID 0, WiFi(802.11a/b/g/n) (0); Frequency: 5540 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 5540$ MHz; $\sigma = 5.523$ S/m; $\epsilon_r = 49.669$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3898; ConvF(4.25, 4.25, 4.25); Calibrated: 2014-3-10;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = 1.0, 25.0$
- Electronics: DAE4 Sn852; Calibrated: 2014-4-30
- Phantom: ELI v5.0; Type: ELI; Serial: TP:1111
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Body/Area Scan (5x15x1): Measurement grid: $dx=10$ mm, $dy=10$ mm

Maximum value of SAR (measured) = 2.67 W/kg

Configuration/Body/Zoom Scan (8x8x7)/Cube 0: Measurement grid: $dx=4$ mm, $dy=4$ mm, $dz=1.4$ mm

Reference Value = 1.511 V/m; Power Drift = 0.19 dB

Peak SAR (extrapolated) = 5.47 W/kg

SAR(1 g) = 0.946 W/kg; SAR(10 g) = 0.182 W/kg

Maximum value of SAR (measured) = 2.71 W/kg

