Date/Time: 2/7/2012 15:37:46

Test Laboratory: HUAWEI SAR Lab

U8655-1 GSM1900 GPRS 1TS 661CH Towards Phantom 10 mm

DUT: U8655-1; Type: HSDPA/UMTS/GPRS/GSM/EDGE Mobile Phone with Bluetooth; webphones Android" by sfr STARTRAIL II; HUAWEI ASCEND Y200; ASCEND Y200; Serial: SAR1

Communication System: HW-GSM\GPRS\EGPRS-1TS; Frequency: 1880 MHz
Medium parameters used: f = 1880 MHz; σ = 1.521 mho/m; ε_r = 53.13; ρ = 1000 kg/m^3
Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3736; ConvF(7.26, 7.26, 7.26); Calibrated: 11/23/2011
- Sensor-Surface: 4mm (Mechanical Surface Detection), z = 1.0, 31.0
- Electronics: DAE4 Sn1236; Calibrated: 11/11/2011
- Phantom: SAM4; Type: SAM; Serial: TP-1620
- DASY52 52.8.0(692); SEMCAD X 14.6.4(4989)

Configuration/Body/Area Scan (8x12x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (measured) = 0.429 mW/g

Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm
Reference Value = 7.127 V/m; Power Drift = 0.08 dB
Peak SAR (extrapolated) = 0.6540
SAR(1 g) = 0.413 mW/g; SAR(10 g) = 0.254 mW/g
Maximum value of SAR (measured) = 0.452 mW/g

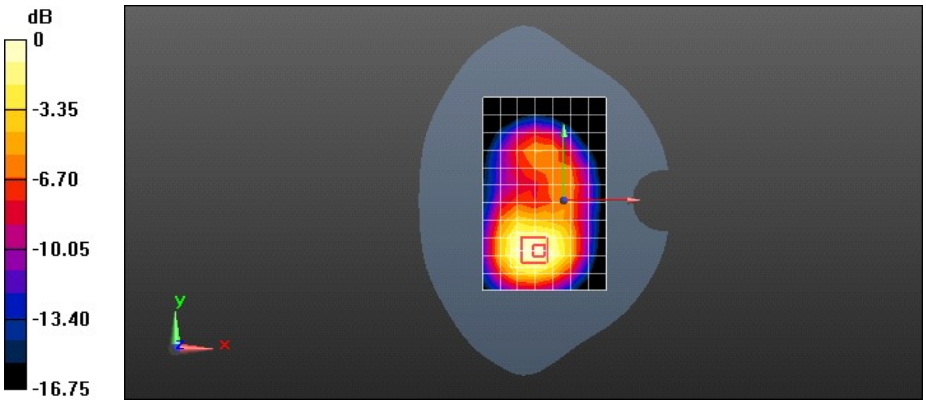

0 dB = 0.450mW/g = -6.94 dB mW/g

Date/Time: 2/7/2012 16:05:33

Test Laboratory: HUAWEI SAR Lab

U8655-1 GSM1900 GPRS 2TS 661CH Towards Phantom 10 mm

DUT: U8655-1; Type: HSDPA/UMTS/GPRS/GSM/EDGE Mobile Phone with Bluetooth; webphones Android" by sfr STARTRAIL II; HUAWEI ASCEND Y200; ASCEND Y200; Serial: SAR1

Communication System: HW-GSM\GPRS\EGPRS-2TS; Frequency: 1880 MHz
Medium parameters used: f = 1880 MHz; σ = 1.521 mho/m; ε_r = 53.13; ρ = 1000 kg/m^3
Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3736; ConvF(7.26, 7.26, 7.26); Calibrated: 11/23/2011
- Sensor-Surface: 4mm (Mechanical Surface Detection), z = 1.0, 31.0
- Electronics: DAE4 Sn1236; Calibrated: 11/11/2011
- Phantom: SAM4; Type: SAM; Serial: TP-1620
- DASY52 52.8.0(692); SEMCAD X 14.6.4(4989)

Configuration/Body/Area Scan (8x12x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (measured) = 0.805 mW/g

Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm
Reference Value = 9.919 V/m; Power Drift = -0.05 dB
Peak SAR (extrapolated) = 1.2080
SAR(1 g) = 0.766 mW/g; SAR(10 g) = 0.472 mW/g
Maximum value of SAR (measured) = 0.835 mW/g

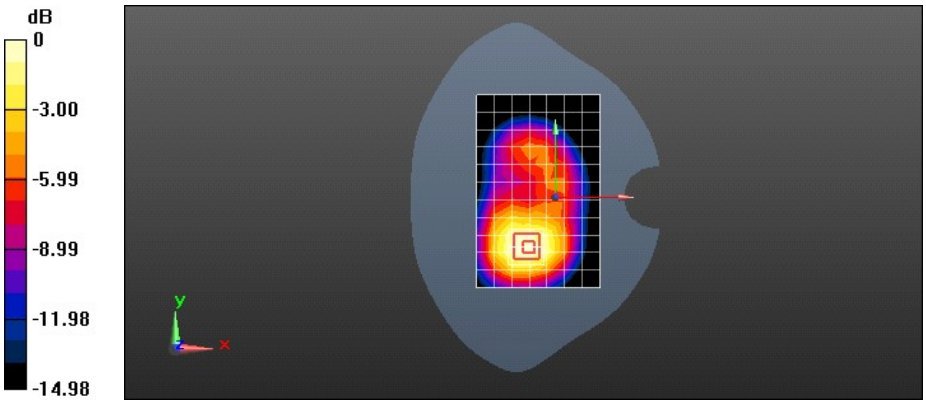

0 dB = 0.830mW/g = -1.62 dB mW/g

Date/Time: 2/7/2012 18:18:31

Test Laboratory: HUAWEI SAR Lab

U8655-1 GSM1900 GPRS 2TS 810CH Towards Ground 10 mm

DUT: U8655-1; Type: HSDPA/UMTS/GPRS/GSM/EDGE Mobile Phone with Bluetooth; webphones Android" by sfr STARTRAIL II; HUAWEI ASCEND Y200; ASCEND Y200; Serial: SAR1

Communication System: HW-GSM\GPRS\EGPRS-2TS; Frequency: 1909.8 MHz
Medium parameters used: f = 1910 MHz; σ = 1.554 mho/m; ε_r = 52.97; ρ = 1000 kg/m^3
Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3736; ConvF(7.26, 7.26, 7.26); Calibrated: 11/23/2011
- Sensor-Surface: 4mm (Mechanical Surface Detection), z = 1.0, 31.0
- Electronics: DAE4 Sn1236; Calibrated: 11/11/2011
- Phantom: SAM4; Type: SAM; Serial: TP-1620
- DASY52 52.8.0(692); SEMCAD X 14.6.4(4989)

Configuration/Body/Area Scan (8x12x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (measured) = 1.121 mW/g

Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm
Reference Value = 12.807 V/m; Power Drift = -0.05 dB
Peak SAR (extrapolated) = 1.6990
SAR(1 g) = 1.05 mW/g; SAR(10 g) = 0.630 mW/g
Maximum value of SAR (measured) = 1.151 mW/g

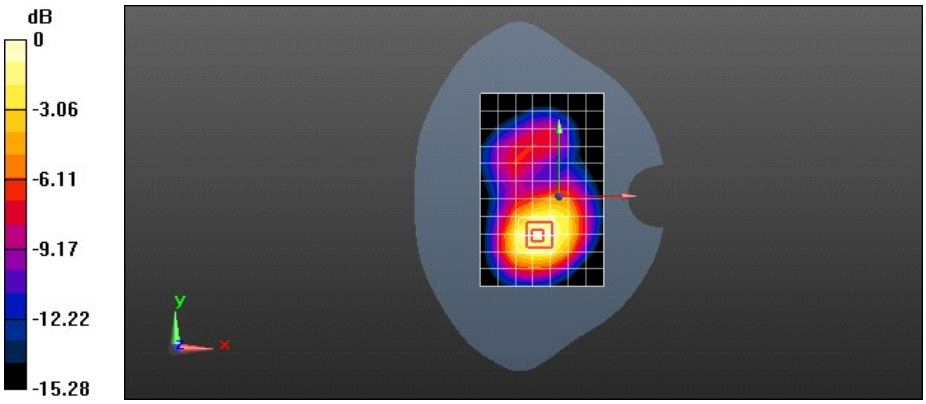

0 dB = 1.150mW/g = 1.21 dB mW/g

Date/Time: 2/7/2012 17:51:18

Test Laboratory: HUAWEI SAR Lab

U8655-1 GSM1900 GPRS 2TS 661CH Towards Ground 10 mm

DUT: U8655-1; Type: HSDPA/UMTS/GPRS/GSM/EDGE Mobile Phone with Bluetooth; webphones Android" by sfr STARTRAIL II; HUAWEI ASCEND Y200; ASCEND Y200; Serial: SAR1

Communication System: HW-GSM\GPRS\EGPRS-2TS; Frequency: 1880 MHz
Medium parameters used: f = 1880 MHz; σ = 1.521 mho/m; ε_r = 53.13; ρ = 1000 kg/m^3
Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3736; ConvF(7.26, 7.26, 7.26); Calibrated: 11/23/2011
- Sensor-Surface: 4mm (Mechanical Surface Detection), z = 1.0, 31.0
- Electronics: DAE4 Sn1236; Calibrated: 11/11/2011
- Phantom: SAM4; Type: SAM; Serial: TP-1620
- DASY52 52.8.0(692); SEMCAD X 14.6.4(4989)

Configuration/Body/Area Scan (8x12x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (measured) = 1.071 mW/g

Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm
Reference Value = 12.192 V/m; Power Drift = -0.04 dB
Peak SAR (extrapolated) = 1.6850
SAR(1 g) = 1.03 mW/g; SAR(10 g) = 0.627 mW/g
Maximum value of SAR (measured) = 1.119 mW/g

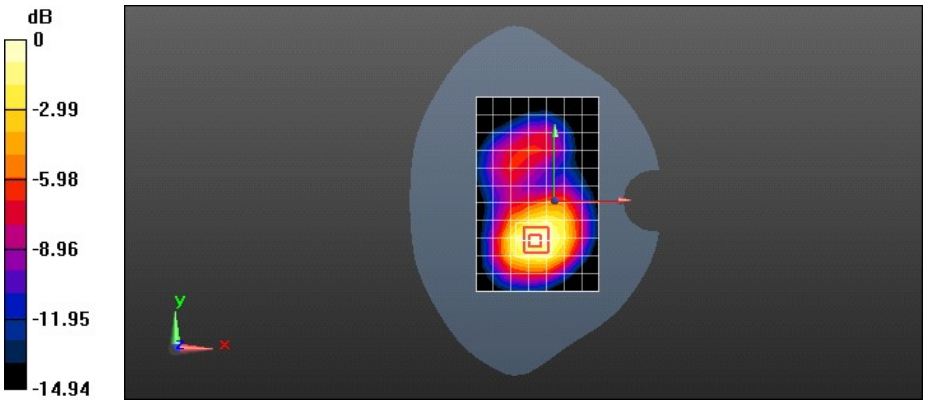

0 dB = 1.120mW/g = 0.98 dB mW/g

Date/Time: 2/7/2012 18:44:53

Test Laboratory: HUAWEI SAR Lab

U8655-1 GSM1900 GPRS 2TS 512CH Towards Ground 10 mm

DUT: U8655-1; Type: HSDPA/UMTS/GPRS/GSM/EDGE Mobile Phone with Bluetooth; webphones Android" by sfr STARTRAIL II; HUAWEI ASCEND Y200; ASCEND Y200; Serial: SAR1

Communication System: HW-GSM\GPRS\EGPRS-2TS; Frequency: 1850.2 MHz
Medium parameters used (interpolated): f = 1850.2 MHz; σ = 1.488 mho/m; ε_r = 53.206; ρ = 1000 kg/m^3
Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3736; ConvF(7.26, 7.26, 7.26); Calibrated: 11/23/2011
- Sensor-Surface: 4mm (Mechanical Surface Detection), z = 1.0, 31.0
- Electronics: DAE4 Sn1236; Calibrated: 11/11/2011
- Phantom: SAM4; Type: SAM; Serial: TP-1620
- DASY52 52.8.0(692); SEMCAD X 14.6.4(4989)

Configuration/Body/Area Scan (8x12x1): Measurement grid: dx=15mm, dy=15mm

Info: Interpolated medium parameters used for SAR evaluation.
Maximum value of SAR (measured) = 1.028 mW/g

Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm
Reference Value = 11.982 V/m; Power Drift = 0.04 dB
Peak SAR (extrapolated) = 1.5140
SAR(1 g) = 0.964 mW/g; SAR(10 g) = 0.603 mW/g

Info: Interpolated medium parameters used for SAR evaluation.
Maximum value of SAR (measured) = 1.034 mW/g

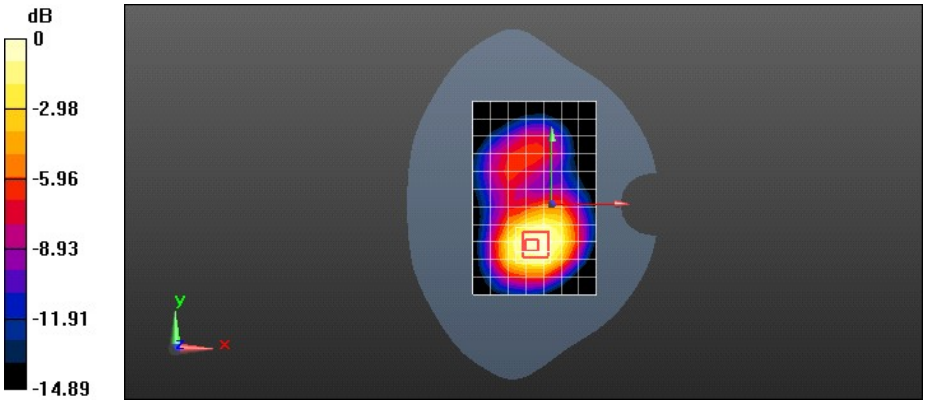

0 dB = 1.030mW/g = 0.26 dB mW/g

Date/Time: 2/7/2012 19:16:16

Test Laboratory: HUAWEI SAR Lab

U8655-1 GSM1900 GPRS 2TS 661CH Left edge 10mm

DUT: U8655-1; Type: HSDPA/UMTS/GPRS/GSM/EDGE Mobile Phone with Bluetooth; webphones Android" by sfr STARTRAIL II; HUAWEI ASCEND Y200; ASCEND Y200; Serial: SAR1

Communication System: HW-GSM\GPRS\EGPRS-2TS; Frequency: 1880 MHz
Medium parameters used: f = 1880 MHz; σ = 1.521 mho/m; ε_r = 53.13; ρ = 1000 kg/m^3
Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3736; ConvF(7.26, 7.26, 7.26); Calibrated: 11/23/2011
- Sensor-Surface: 4mm (Mechanical Surface Detection), z = 1.0, 31.0
- Electronics: DAE4 Sn1236; Calibrated: 11/11/2011
- Phantom: SAM4; Type: SAM; Serial: TP-1620
- DASY52 52.8.0(692); SEMCAD X 14.6.4(4989)

Configuration/Body/Area Scan (8x12x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (measured) = 0.375 mW/g

Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm
Reference Value = 11.789 V/m; Power Drift = -0.08 dB
Peak SAR (extrapolated) = 0.5690
SAR(1 g) = 0.347 mW/g; SAR(10 g) = 0.197 mW/g
Maximum value of SAR (measured) = 0.383 mW/g

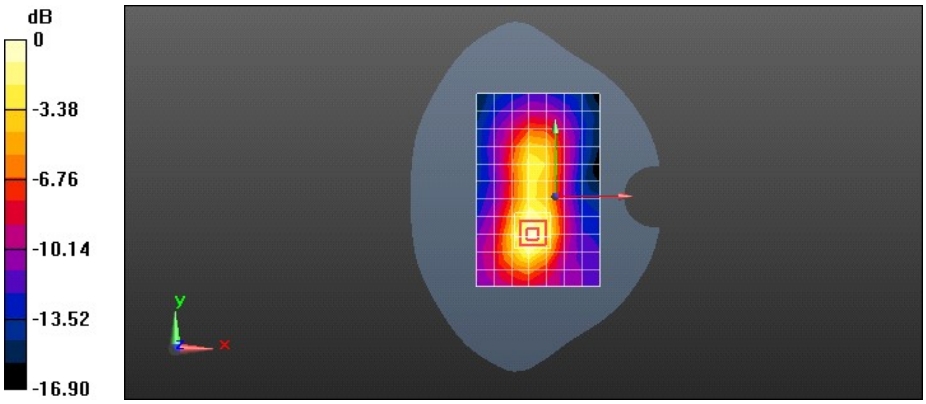

0 dB = 0.380mW/g = -8.40 dB mW/g

Date/Time: 2/7/2012 19:46:05

Test Laboratory: HUAWEI SAR Lab

U8655-1 GSM1900 GPRS 2TS 661CH Right edge 10mm

DUT: U8655-1; Type: HSDPA/UMTS/GPRS/GSM/EDGE Mobile Phone with Bluetooth; webphones Android" by sfr STARTRAIL II; HUAWEI ASCEND Y200; ASCEND Y200; Serial: SAR1

Communication System: HW-GSM\GPRS\EGPRS-2TS; Frequency: 1880 MHz
Medium parameters used: f = 1880 MHz; σ = 1.521 mho/m; ε_r = 53.13; ρ = 1000 kg/m^3
Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3736; ConvF(7.26, 7.26, 7.26); Calibrated: 11/23/2011
- Sensor-Surface: 4mm (Mechanical Surface Detection), z = 1.0, 31.0
- Electronics: DAE4 Sn1236; Calibrated: 11/11/2011
- Phantom: SAM4; Type: SAM; Serial: TP-1620
- DASY52 52.8.0(692); SEMCAD X 14.6.4(4989)

Configuration/Body/Area Scan (8x12x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (measured) = 0.168 mW/g

Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm
Reference Value = 8.657 V/m; Power Drift = 0.06 dB
Peak SAR (extrapolated) = 0.2780
SAR(1 g) = 0.172 mW/g; SAR(10 g) = 0.101 mW/g
Maximum value of SAR (measured) = 0.190 mW/g

Configuration/Body/Zoom Scan (7x7x7)/Cube 1: Measurement grid: dx=5mm, dy=5mm, dz=5mm
Reference Value = 8.657 V/m; Power Drift = 0.06 dB
Peak SAR (extrapolated) = 0.2620
SAR(1 g) = 0.162 mW/g; SAR(10 g) = 0.096 mW/g
Maximum value of SAR (measured) = 0.174 mW/g

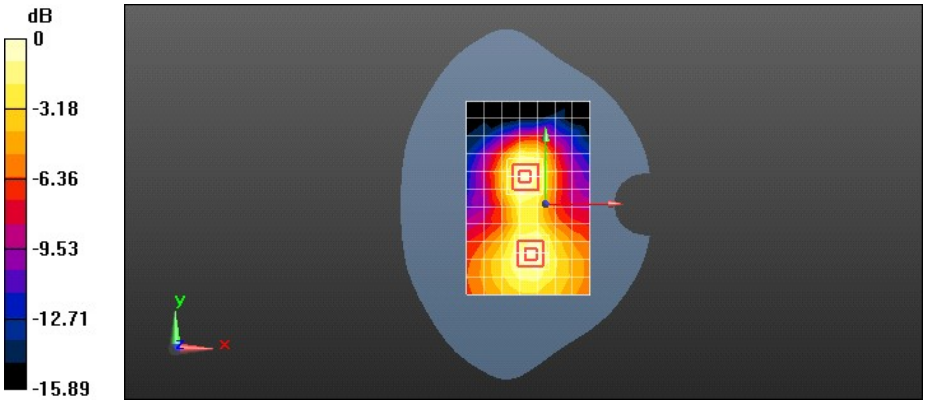

0 dB = 0.170mW/g = -15.39 dB mW/g

Date/Time: 2/7/2012 20:31:15

Test Laboratory: HUAWEI SAR Lab

U8655-1 GSM1900 GPRS 2TS 661CH Bottom edge 10mm

DUT: U8655-1; Type: HSDPA/UMTS/GPRS/GSM/EDGE Mobile Phone with Bluetooth; webphones Android" by sfr STARTRAIL II; HUAWEI ASCEND Y200; ASCEND Y200; Serial: SAR1

Communication System: HW-GSM\GPRS\EGPRS-2TS; Frequency: 1880 MHz
Medium parameters used: f = 1880 MHz; σ = 1.521 mho/m; ε_r = 53.13; ρ = 1000 kg/m^3
Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3736; ConvF(7.26, 7.26, 7.26); Calibrated: 11/23/2011
- Sensor-Surface: 4mm (Mechanical Surface Detection), z = 1.0, 31.0
- Electronics: DAE4 Sn1236; Calibrated: 11/11/2011
- Phantom: SAM4; Type: SAM; Serial: TP-1620
- DASY52 52.8.0(692); SEMCAD X 14.6.4(4989)

Configuration/Body/Area Scan (8x12x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (measured) = 0.844 mW/g

Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm
Reference Value = 23.267 V/m; Power Drift = 0.02 dB
Peak SAR (extrapolated) = 1.2450
SAR(1 g) = 0.759 mW/g; SAR(10 g) = 0.443 mW/g
Maximum value of SAR (measured) = 0.819 mW/g

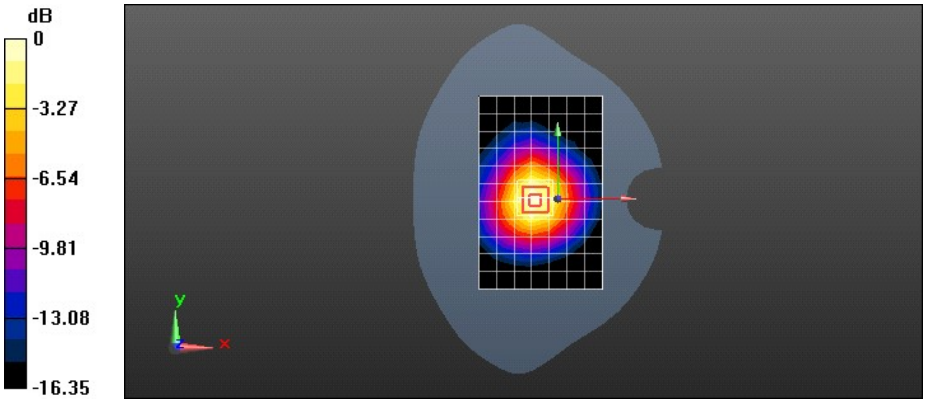

0 dB = 0.820mW/g = -1.72 dB mW/g

Date/Time: 2/7/2012 21:01:16

Test Laboratory: HUAWEI SAR Lab

U8655-1 GSM1900 EDGE 1TS 661CH Towards Ground 10 mm

DUT: U8655-1; Type: HSDPA/UMTS/GPRS/GSM/EDGE Mobile Phone with Bluetooth; webphones Android" by sfr STARTRAIL II; HUAWEI ASCEND Y200; ASCEND Y200; Serial: SAR1

Communication System: HW-GSM\GPRS\EGPRS-1TS; Frequency: 1880 MHz
Medium parameters used: f = 1880 MHz; σ = 1.521 mho/m; ε_r = 53.13; ρ = 1000 kg/m^3
Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3736; ConvF(7.26, 7.26, 7.26); Calibrated: 11/23/2011
- Sensor-Surface: 4mm (Mechanical Surface Detection), z = 1.0, 31.0
- Electronics: DAE4 Sn1236; Calibrated: 11/11/2011
- Phantom: SAM4; Type: SAM; Serial: TP-1620
- DASY52 52.8.0(692); SEMCAD X 14.6.4(4989)

Configuration/Body/Area Scan (8x12x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (measured) = 0.589 mW/g

Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm
Reference Value = 8.066 V/m; Power Drift = -0.04 dB
Peak SAR (extrapolated) = 1.0150
SAR(1 g) = 0.609 mW/g; SAR(10 g) = 0.365 mW/g
Maximum value of SAR (measured) = 0.663 mW/g

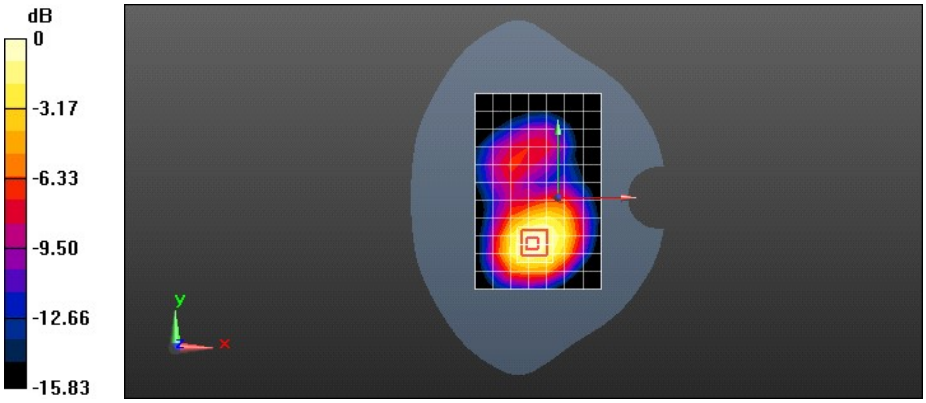

0 dB = 0.660mW/g = -3.61 dB mW/g

Date/Time: 2/7/2012 22:10:03

Test Laboratory: HUAWEI SAR Lab

U8655-1 GSM1900 EDGE 2TS 810CH Towards Ground 10 mm

DUT: U8655-1; Type: HSDPA/UMTS/GPRS/GSM/EDGE Mobile Phone with Bluetooth; webphones Android" by sfr STARTRAIL II; HUAWEI ASCEND Y200; ASCEND Y200; Serial: SAR1

Communication System: HW-GSM\GPRS\EGPRS-2TS; Frequency: 1909.8 MHz
Medium parameters used: f = 1910 MHz; σ = 1.554 mho/m; ε_r = 52.97; ρ = 1000 kg/m^3
Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3736; ConvF(7.26, 7.26, 7.26); Calibrated: 11/23/2011
- Sensor-Surface: 4mm (Mechanical Surface Detection), z = 1.0, 31.0
- Electronics: DAE4 Sn1236; Calibrated: 11/11/2011
- Phantom: SAM4; Type: SAM; Serial: TP-1620
- DASY52 52.8.0(692); SEMCAD X 14.6.4(4989)

Configuration/Body/Area Scan (8x12x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (measured) = 1.151 mW/g

Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm
Reference Value = 16.454 V/m; Power Drift = -0.12 dB
Peak SAR (extrapolated) = 1.9340
SAR(1 g) = 1.12 mW/g; SAR(10 g) = 0.658 mW/g
Maximum value of SAR (measured) = 1.241 mW/g

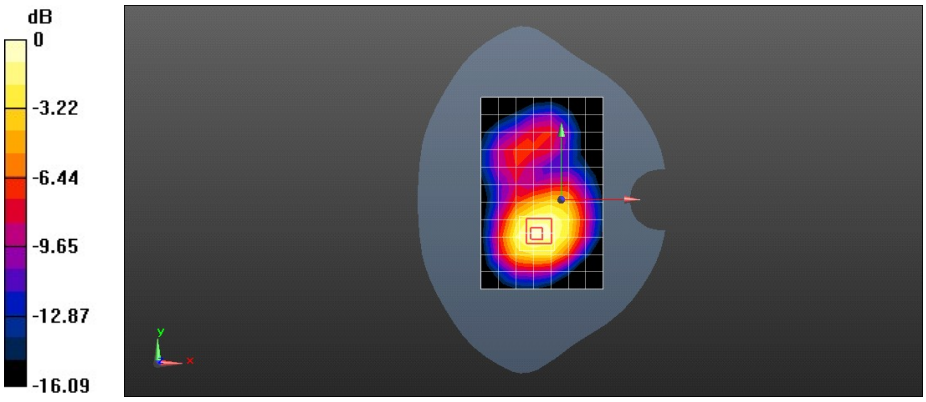

0 dB = 1.240mW/g = 1.87 dB mW/g

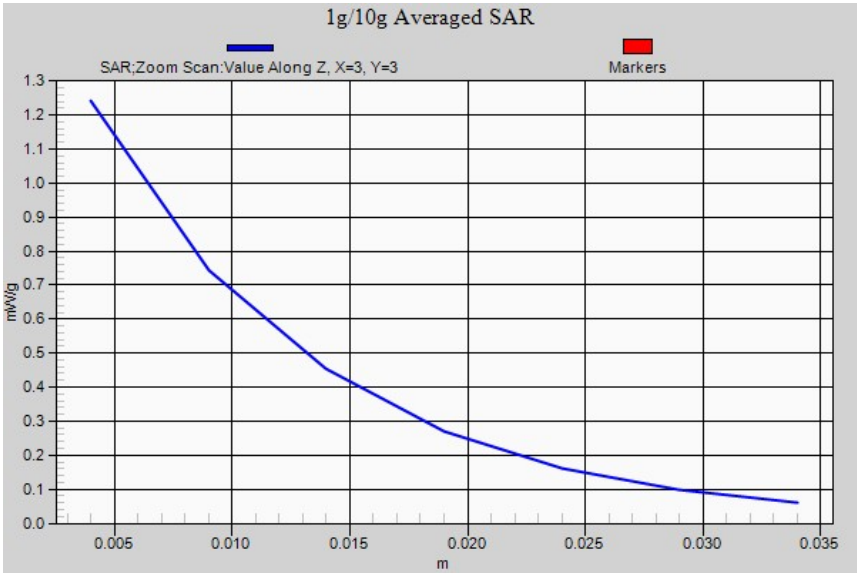

Date/Time: 2/7/2012 21:32:54

Test Laboratory: HUAWEI SAR Lab

U8655-1 GSM1900 EDGE 2TS 661CH Towards Ground 10 mm

DUT: U8655-1; Type: HSDPA/UMTS/GPRS/GSM/EDGE Mobile Phone with Bluetooth; webphones Android" by sfr STARTRAIL II; HUAWEI ASCEND Y200; ASCEND Y200; Serial: SAR1

Communication System: HW-GSM\GPRS\EGPRS-2TS; Frequency: 1880 MHz
Medium parameters used: f = 1880 MHz; σ = 1.521 mho/m; ε_r = 53.13; ρ = 1000 kg/m^3
Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3736; ConvF(7.26, 7.26, 7.26); Calibrated: 11/23/2011
- Sensor-Surface: 4mm (Mechanical Surface Detection), z = 1.0, 31.0
- Electronics: DAE4 Sn1236; Calibrated: 11/11/2011
- Phantom: SAM4; Type: SAM; Serial: TP-1620
- DASY52 52.8.0(692); SEMCAD X 14.6.4(4989)

Configuration/Body/Area Scan (8x12x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (measured) = 1.065 mW/g

Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm
Reference Value = 11.229 V/m; Power Drift = -0.02 dB
Peak SAR (extrapolated) = 1.7070
SAR(1 g) = 1.08 mW/g; SAR(10 g) = 0.650 mW/g
Maximum value of SAR (measured) = 1.183 mW/g

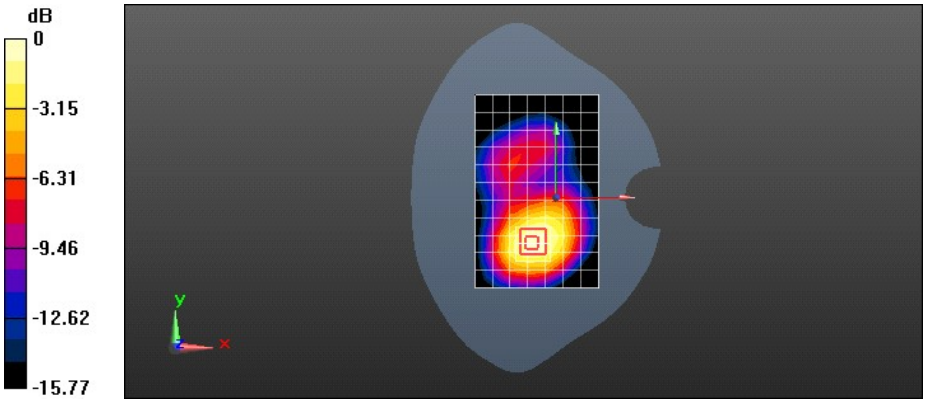

0 dB = 1.180mW/g = 1.44 dB mW/g

Date/Time: 2/7/2012 22:36:08

Test Laboratory: HUAWEI SAR Lab

U8655-1 GSM1900 EDGE 2TS 512CH Towards Ground 10 mm

DUT: U8655-1; Type: HSDPA/UMTS/GPRS/GSM/EDGE Mobile Phone with Bluetooth; webphones Android" by sfr STARTRAIL II; HUAWEI ASCEND Y200; ASCEND Y200; Serial: SAR1

Communication System: HW-GSM\GPRS\EGPRS-2TS; Frequency: 1850.2 MHz
Medium parameters used (interpolated): f = 1850.2 MHz; σ = 1.488 mho/m; ε_r = 53.206; ρ = 1000 kg/m^3
Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3736; ConvF(7.26, 7.26, 7.26); Calibrated: 11/23/2011
- Sensor-Surface: 4mm (Mechanical Surface Detection), z = 1.0, 31.0
- Electronics: DAE4 Sn1236; Calibrated: 11/11/2011
- Phantom: SAM4; Type: SAM; Serial: TP-1620
- DASY52 52.8.0(692); SEMCAD X 14.6.4(4989)

Configuration/Body/Area Scan (8x12x1): Measurement grid: dx=15mm, dy=15mm

Info: Interpolated medium parameters used for SAR evaluation.
Maximum value of SAR (measured) = 0.941 mW/g

Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 11.009 V/m; Power Drift = -0.15 dB
Peak SAR (extrapolated) = 1.6120
SAR(1 g) = 1.01 mW/g; SAR(10 g) = 0.615 mW/g

Info: Interpolated medium parameters used for SAR evaluation.
Maximum value of SAR (measured) = 1.103 mW/g

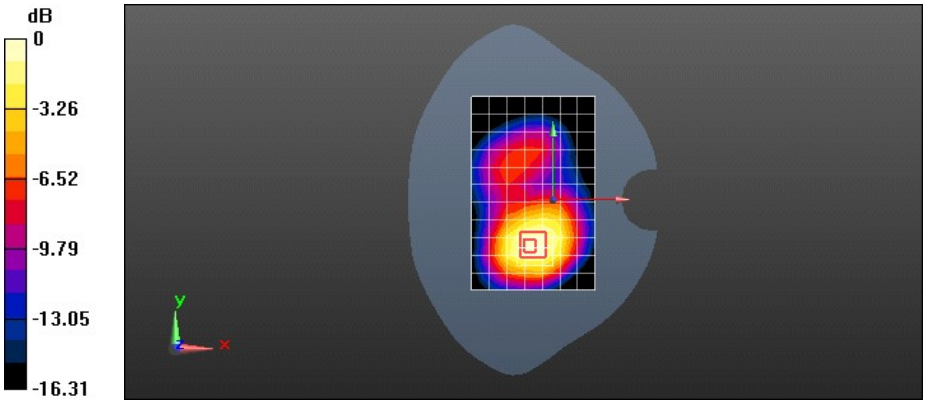

0 dB = 1.100mW/g = 0.83 dB mW/g

Date/Time: 2/7/2012 23:03:38

Test Laboratory: HUAWEI SAR Lab

U8655-1 GSM1900 810CH Towards Ground 10 mm with Headset

DUT: U8655-1; Type: HSDPA/UMTS/GPRS/GSM/EDGE Mobile Phone with Bluetooth; webphones Android" by sfr STARTRAIL II; HUAWEI ASCEND Y200; ASCEND Y200; Serial: SAR1

Communication System: HW-GSM\GPRS\EGPRS-1TS; Frequency: 1909.8 MHz
Medium parameters used: f = 1910 MHz; σ = 1.554 mho/m; ε_r = 52.97; ρ = 1000 kg/m^3
Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3736; ConvF(7.26, 7.26, 7.26); Calibrated: 11/23/2011
- Sensor-Surface: 4mm (Mechanical Surface Detection), z = 1.0, 31.0
- Electronics: DAE4 Sn1236; Calibrated: 11/11/2011
- Phantom: SAM4; Type: SAM; Serial: TP-1620
- DASY52 52.8.0(692); SEMCAD X 14.6.4(4989)

Configuration/Body/Area Scan (8x12x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (measured) = 0.559 mW/g

Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm
Reference Value = 9.215 V/m; Power Drift = 0.05 dB
Peak SAR (extrapolated) = 0.9500
SAR(1 g) = 0.566 mW/g; SAR(10 g) = 0.337 mW/g
Maximum value of SAR (measured) = 0.624 mW/g

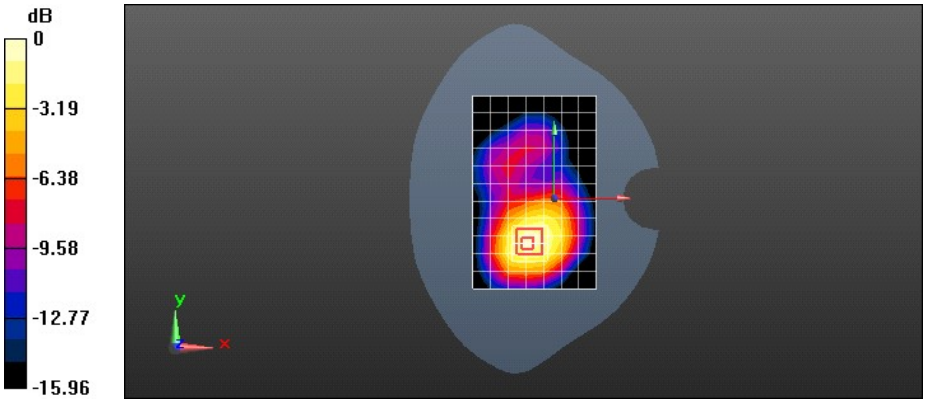

0 dB = 0.620mW/g = -4.15 dB mW/g

Date/Time: 2/7/2012 23:30:09

Test Laboratory: HUAWEI SAR Lab

U8655-1 GSM1900 EDGE 2TS 810CH Towards Ground 10 mm with The battery GAGB916XC37L1127(1250mAh)

DUT: U8655-1; Type: HSDPA/UMTS/GPRS/GSM/EDGE Mobile Phone with Bluetooth; webphones Android" by sfr STARTRAIL II; HUAWEI ASCEND Y200; ASCEND Y200; Serial: SAR1

Communication System: HW-GSM\GPRS\EGPRS-2TS; Frequency: 1909.8 MHz
Medium parameters used: f = 1910 MHz; σ = 1.554 mho/m; ε_r = 52.97; ρ = 1000 kg/m^3
Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3736; ConvF(7.26, 7.26, 7.26); Calibrated: 11/23/2011
- Sensor-Surface: 4mm (Mechanical Surface Detection), z = 1.0, 31.0
- Electronics: DAE4 Sn1236; Calibrated: 11/11/2011
- Phantom: SAM4; Type: SAM; Serial: TP-1620
- DASY52 52.8.0(692); SEMCAD X 14.6.4(4989)

Configuration/Body/Area Scan (8x12x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (measured) = 1.124 mW/g

Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm
Reference Value = 11.964 V/m; Power Drift = -0.15 dB
Peak SAR (extrapolated) = 1.8230
SAR(1 g) = 1.11 mW/g; SAR(10 g) = 0.662 mW/g
Maximum value of SAR (measured) = 1.223 mW/g

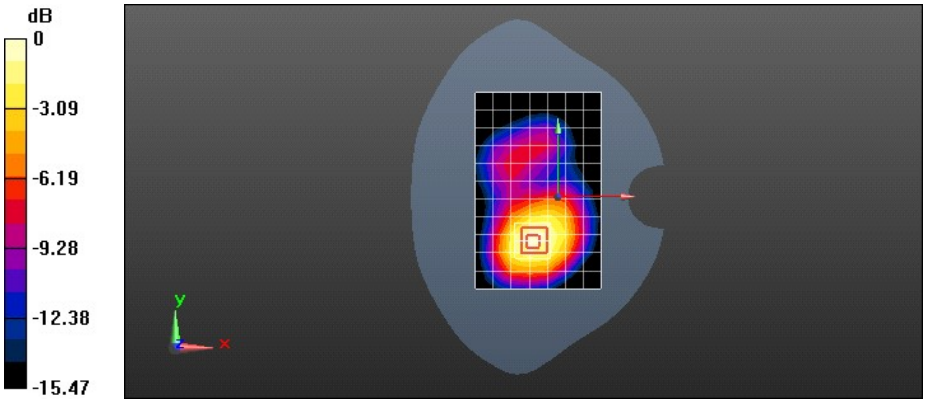

0 dB = 1.220mW/g = 1.73 dB mW/g

Date/Time: 2/8/2012 0:02:07

Test Laboratory: HUAWEI SAR Lab

U8655-1 GSM1900 EDGE 2TS 810CH Towards Ground 10 mm with The battery BAAC214F97400361(1250mAh)

DUT: U8655-1; Type: HSDPA/UMTS/GPRS/GSM/EDGE Mobile Phone with Bluetooth; webphones Android" by sfr STARTRAIL II; HUAWEI ASCEND Y200; ASCEND Y200; Serial: SAR1

Communication System: HW-GSM\GPRS\EGPRS-2TS; Frequency: 1909.8 MHz
Medium parameters used: f = 1910 MHz; σ = 1.554 mho/m; ε_r = 52.97; ρ = 1000 kg/m^3
Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3736; ConvF(7.26, 7.26, 7.26); Calibrated: 11/23/2011
- Sensor-Surface: 4mm (Mechanical Surface Detection), z = 1.0, 31.0
- Electronics: DAE4 Sn1236; Calibrated: 11/11/2011
- Phantom: SAM4; Type: SAM; Serial: TP-1620
- DASY52 52.8.0(692); SEMCAD X 14.6.4(4989)

Configuration/Body/Area Scan (8x12x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (measured) = 1.011 mW/g

Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm
Reference Value = 11.195 V/m; Power Drift = -0.10 dB
Peak SAR (extrapolated) = 1.6940
SAR(1 g) = 1.01 mW/g; SAR(10 g) = 0.596 mW/g
Maximum value of SAR (measured) = 1.112 mW/g

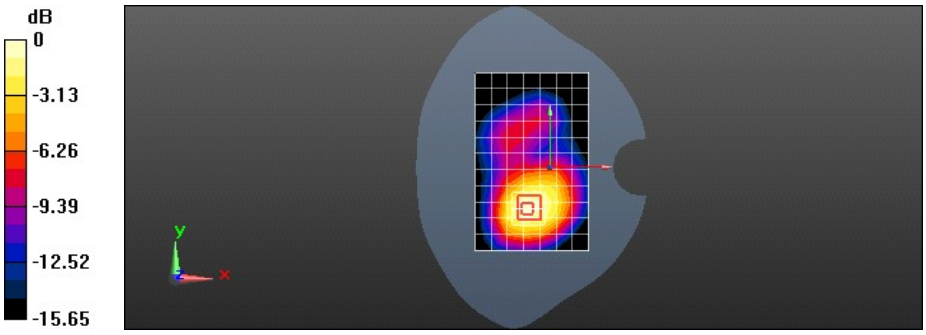

0 dB = 1.110mW/g = 0.91 dB mW/g

Date/Time: 2/10/2012 22:45:12

Test Laboratory: HUAWEI SAR Lab

U8655-1 WiFi 11b 6CH Left hand touch cheek

DUT: U8655-1; Type: HSDPA/UMTS/GPRS/GSM/EDGE Mobile Phone with Bluetooth; webphones Android" by sfr STARTRAIL II; HUAWEI ASCEND Y200; ASCEND Y200; Serial: SAR1

Communication System: WiFi(802.11b/g/n); Frequency: 2437 MHz
Medium parameters used: f = 2437 MHz; σ = 1.85 mho/m; ε_r = 38.769; ρ = 1000 kg/m^3
Phantom section: Left Section

DASY Configuration:

- Probe: EX3DV4 - SN3736; ConvF(6.86, 6.86, 6.86); Calibrated: 11/23/2011
- Sensor-Surface: 4mm (Mechanical Surface Detection), z = 1.0, 31.0
- Electronics: DAE4 Sn1236; Calibrated: 11/11/2011
- Phantom: SAM4; Type: SAM; Serial: TP-1620
- DASY52 52.8.0(692); SEMCAD X 14.6.4(4989)

Configuration/Head/Area Scan (8x12x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (measured) = 0.072 mW/g

Configuration/Head/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm
Reference Value = 6.115 V/m; Power Drift = -0.03 dB
Peak SAR (extrapolated) = 0.1260
SAR(1 g) = 0.071 mW/g; SAR(10 g) = 0.036 mW/g
Maximum value of SAR (measured) = 0.079 mW/g

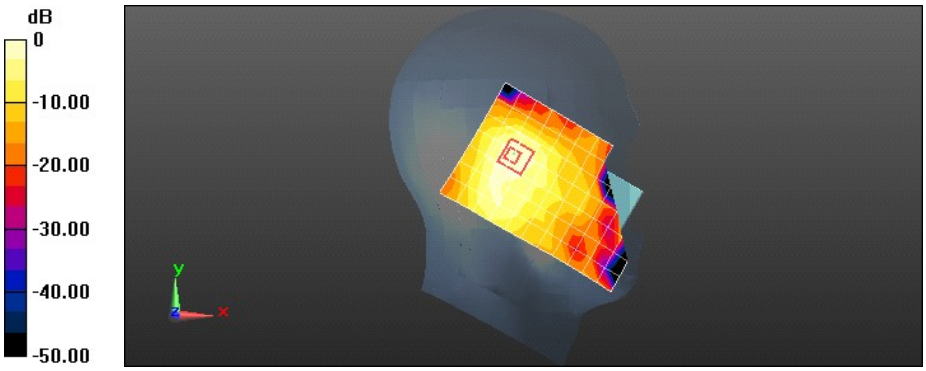

0 dB = 0.080mW/g = -21.94 dB mW/g

Date/Time: 2/10/2012 23:11:54

Test Laboratory: HUAWEI SAR Lab

U8655-1 WiFi 11b 6CH Left hand tilt 15 degree

DUT: U8655-1; Type: HSDPA/UMTS/GPRS/GSM/EDGE Mobile Phone with Bluetooth; webphones Android" by sfr STARTRAIL II; HUAWEI ASCEND Y200; ASCEND Y200; Serial: SAR1

Communication System: WiFi(802.11b/g/n); Frequency: 2437 MHz
Medium parameters used: f = 2437 MHz; σ = 1.85 mho/m; ε_r = 38.769; ρ = 1000 kg/m^3
Phantom section: Left Section

DASY Configuration:

- Probe: EX3DV4 - SN3736; ConvF(6.86, 6.86, 6.86); Calibrated: 11/23/2011
- Sensor-Surface: 4mm (Mechanical Surface Detection), z = 1.0, 31.0
- Electronics: DAE4 Sn1236; Calibrated: 11/11/2011
- Phantom: SAM4; Type: SAM; Serial: TP-1620
- DASY52 52.8.0(692); SEMCAD X 14.6.4(4989)

Configuration/Head/Area Scan (8x12x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (measured) = 0.064 mW/g

Configuration/Head/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm
Reference Value = 5.804 V/m; Power Drift = 0.01 dB
Peak SAR (extrapolated) = 0.1180
SAR(1 g) = 0.061 mW/g; SAR(10 g) = 0.030 mW/g
Maximum value of SAR (measured) = 0.070 mW/g

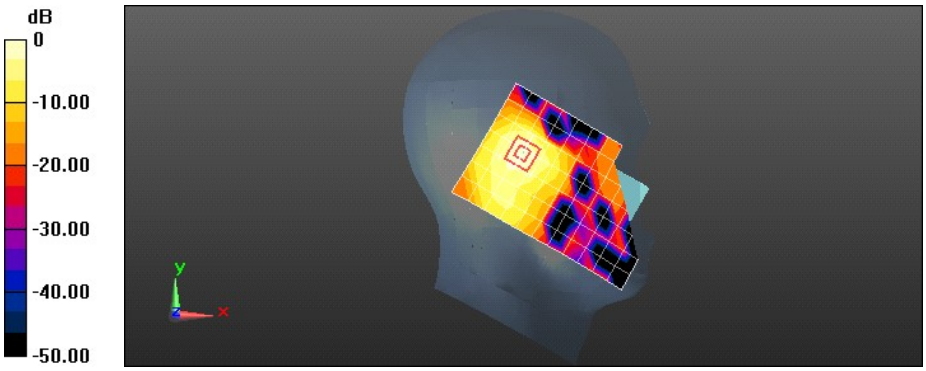

0 dB = 0.070mW/g = -23.10 dB mW/g

Date/Time: 2/10/2012 23:40:33

Test Laboratory: HUAWEI SAR Lab

U8655-1 WiFi 11b 6CH Right hand touch cheek

DUT: U8655-1; Type: HSDPA/UMTS/GPRS/GSM/EDGE Mobile Phone with Bluetooth; webphones Android" by sfr STARTRAIL II; HUAWEI ASCEND Y200; ASCEND Y200; Serial: SAR1

Communication System: WiFi(802.11b/g/n); Frequency: 2437 MHz
Medium parameters used: f = 2437 MHz; σ = 1.85 mho/m; ε_r = 38.769; ρ = 1000 kg/m^3
Phantom section: Right Section

DASY Configuration:

- Probe: EX3DV4 - SN3736; ConvF(6.86, 6.86, 6.86); Calibrated: 11/23/2011
- Sensor-Surface: 4mm (Mechanical Surface Detection), z = 1.0, 31.0
- Electronics: DAE4 Sn1236; Calibrated: 11/11/2011
- Phantom: SAM4; Type: SAM; Serial: TP-1620
- DASY52 52.8.0(692); SEMCAD X 14.6.4(4989)

Configuration/Head/Area Scan (8x12x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (measured) = 0.116 mW/g

Configuration/Head/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm
Reference Value = 5.647 V/m; Power Drift = -0.04 dB
Peak SAR (extrapolated) = 0.2880
SAR(1 g) = 0.125 mW/g; SAR(10 g) = 0.057 mW/g
Maximum value of SAR (measured) = 0.141 mW/g

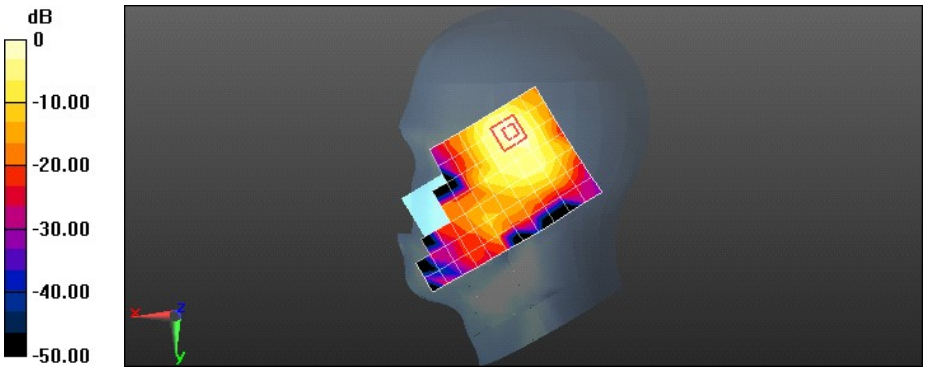

0 dB = 0.140mW/g = -17.08 dB mW/g

Date/Time: 2/11/2012 0:06:31

Test Laboratory: HUAWEI SAR Lab

U8655-1 WiFi 11b 6CH Right hand tilt 15 degree

DUT: U8655-1; Type: HSDPA/UMTS/GPRS/GSM/EDGE Mobile Phone with Bluetooth; webphones Android" by sfr STARTRAIL II; HUAWEI ASCEND Y200; ASCEND Y200; Serial: SAR1

Communication System: WiFi(802.11b/g/n); Frequency: 2437 MHz
Medium parameters used: f = 2437 MHz; σ = 1.85 mho/m; ε_r = 38.769; ρ = 1000 kg/m^3
Phantom section: Right Section

DASY Configuration:

- Probe: EX3DV4 - SN3736; ConvF(6.86, 6.86, 6.86); Calibrated: 11/23/2011
- Sensor-Surface: 4mm (Mechanical Surface Detection), z = 1.0, 31.0
- Electronics: DAE4 Sn1236; Calibrated: 11/11/2011
- Phantom: SAM4; Type: SAM; Serial: TP-1620
- DASY52 52.8.0(692); SEMCAD X 14.6.4(4989)

Configuration/Head/Area Scan (8x12x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (measured) = 0.066 mW/g

Configuration/Head/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm
Reference Value = 5.298 V/m; Power Drift = 0.16 dB
Peak SAR (extrapolated) = 0.1520
SAR(1 g) = 0.066 mW/g; SAR(10 g) = 0.030 mW/g
Maximum value of SAR (measured) = 0.072 mW/g

Configuration/Head/Zoom Scan (7x7x7)/Cube 1: Measurement grid: dx=5mm, dy=5mm, dz=5mm
Reference Value = 5.298 V/m; Power Drift = 0.16 dB
Peak SAR (extrapolated) = 0.0930
SAR(1 g) = 0.050 mW/g; SAR(10 g) = 0.025 mW/g
Maximum value of SAR (measured) = 0.056 mW/g

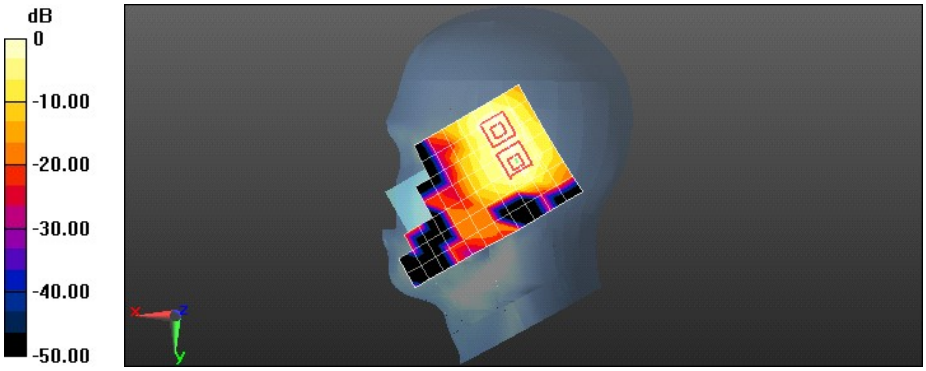

0 dB = 0.060mW/g = -24.44 dB mW/g

Date/Time: 2/11/2012 0:58:47

Test Laboratory: HUAWEI SAR Lab

U8655-1 WiFi 11b 6CH Right hand touch cheek with The battery GAGB916XC37L1127(1250mAh)

DUT: U8655-1; Type: HSDPA/UMTS/GPRS/GSM/EDGE Mobile Phone with Bluetooth; webphones Android" by sfr STARTRAIL II; HUAWEI ASCEND Y200; ASCEND Y200; Serial: SAR1

Communication System: WiFi(802.11b/g/n); Frequency: 2437 MHz
Medium parameters used: f = 2437 MHz; σ = 1.85 mho/m; ε_r = 38.769; ρ = 1000 kg/m^3
Phantom section: Right Section

DASY Configuration:

- Probe: EX3DV4 - SN3736; ConvF(6.86, 6.86, 6.86); Calibrated: 11/23/2011
- Sensor-Surface: 4mm (Mechanical Surface Detection), z = 1.0, 31.0
- Electronics: DAE4 Sn1236; Calibrated: 11/11/2011
- Phantom: SAM4; Type: SAM; Serial: TP-1620
- DASY52 52.8.0(692); SEMCAD X 14.6.4(4989)

Configuration/Head/Area Scan (8x12x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (measured) = 0.118 mW/g

Configuration/Head/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm
Reference Value = 5.398 V/m; Power Drift = 0.08 dB
Peak SAR (extrapolated) = 0.2960
SAR(1 g) = 0.127 mW/g; SAR(10 g) = 0.058 mW/g
Maximum value of SAR (measured) = 0.141 mW/g

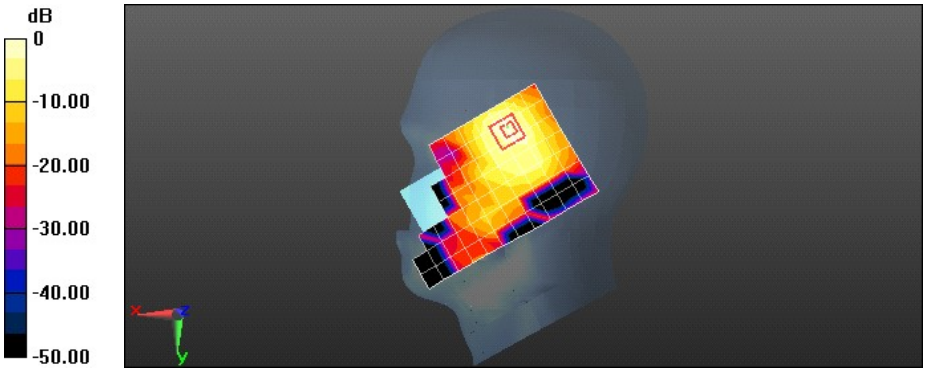

0 dB = 0.140mW/g = -17.08 dB mW/g

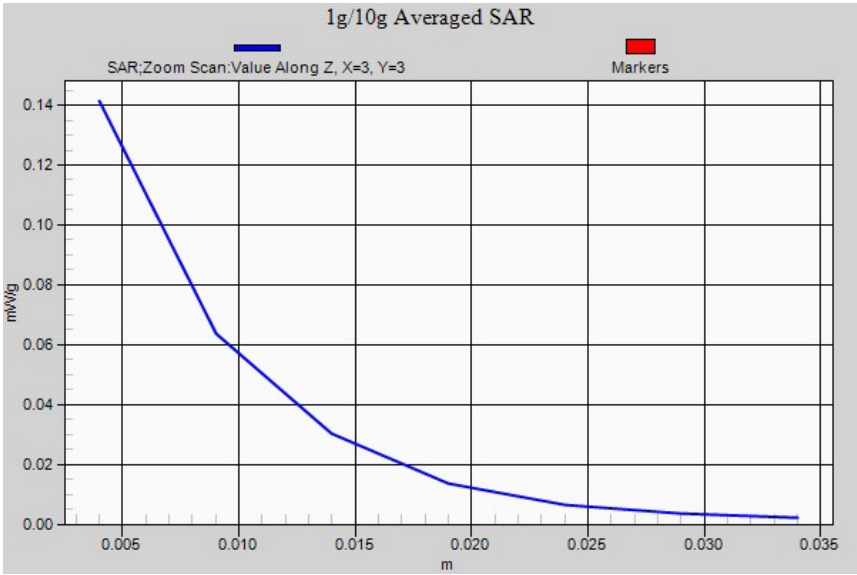

Date/Time: 2/11/2012 1:44:29

Test Laboratory: HUAWEI SAR Lab

U8655-1 WiFi 11b 6CH Right hand touch cheek with The battery BAAC214F97400361(1250mAh)

DUT: U8655-1; Type: HSDPA/UMTS/GPRS/GSM/EDGE Mobile Phone with Bluetooth; webphones Android" by sfr STARTRAIL II; HUAWEI ASCEND Y200; ASCEND Y200; Serial: SAR1

Communication System: WiFi(802.11b/g/n); Frequency: 2437 MHz
Medium parameters used: f = 2437 MHz; σ = 1.85 mho/m; ε_r = 38.769; ρ = 1000 kg/m^3
Phantom section: Right Section

DASY Configuration:

- Probe: EX3DV4 - SN3736; ConvF(6.86, 6.86, 6.86); Calibrated: 11/23/2011
- Sensor-Surface: 4mm (Mechanical Surface Detection), z = 1.0, 31.0
- Electronics: DAE4 Sn1236; Calibrated: 11/11/2011
- Phantom: SAM4; Type: SAM; Serial: TP-1620
- DASY52 52.8.0(692); SEMCAD X 14.6.4(4989)

Configuration/Head/Area Scan (8x12x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (measured) = 0.109 mW/g

Configuration/Head/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm
Reference Value = 5.471 V/m; Power Drift = -0.06 dB
Peak SAR (extrapolated) = 0.2680
SAR(1 g) = 0.119 mW/g; SAR(10 g) = 0.056 mW/g
Maximum value of SAR (measured) = 0.133 mW/g

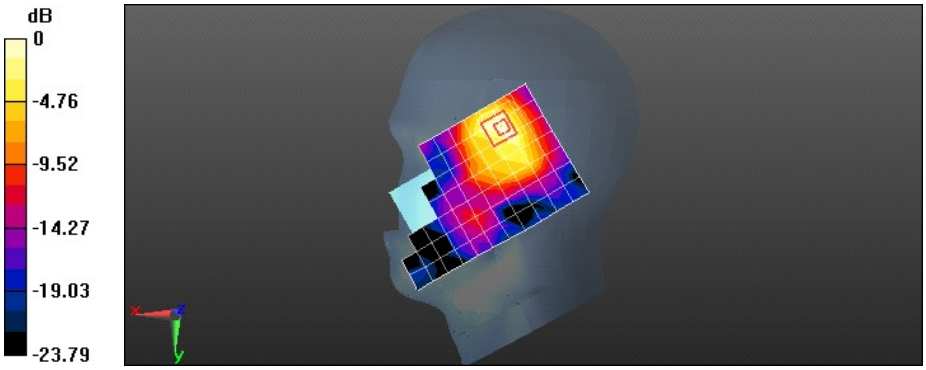

0 dB = 0.130mW/g = -17.72 dB mW/g

Date/Time: 2/17/2012 0:42:49

Test Laboratory: HUAWEI SAR Lab

U8655-1 WiFi 11b 6CH Toward Phantom 10mm

DUT: U8655-1; Type: HSDPA/UMTS/GPRS/GSM/EDGE Mobile Phone with Bluetooth; webphones Android" by sfr STARTRAIL II; HUAWEI ASCEND Y200; ASCEND Y200; Serial: SAR1

Communication System: WiFi(802.11b/g/n); Frequency: 2437 MHz
Medium parameters used: f = 2437 MHz; σ = 1.984 mho/m; ε_r = 51.274; ρ = 1000 kg/m^3
Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3736; ConvF(6.98, 6.98, 6.98); Calibrated: 11/23/2011
- Sensor-Surface: 4mm (Mechanical Surface Detection), z = 1.0, 31.0
- Electronics: DAE4 Sn1236; Calibrated: 11/11/2011
- Phantom: SAM4; Type: SAM; Serial: TP-1620
- DASY52 52.8.0(692); SEMCAD X 14.6.4(4989)

Configuration/Body/Area Scan (8x12x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (measured) = 0.033 mW/g

Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm
Reference Value = 2.852 V/m; Power Drift = -0.10 dB
Peak SAR (extrapolated) = 0.0530
SAR(1 g) = 0.032 mW/g; SAR(10 g) = 0.018 mW/g
Maximum value of SAR (measured) = 0.035 mW/g

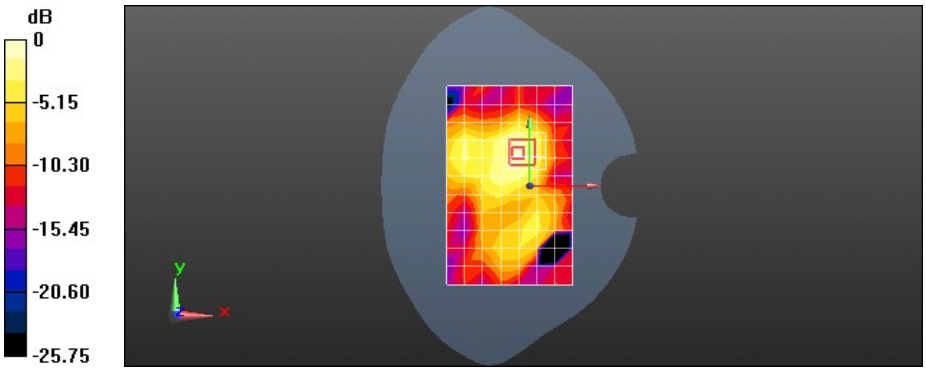

0 dB = 0.040mW/g = -27.96 dB mW/g

Date/Time: 2/17/2012 1:33:59

Test Laboratory: HUAWEI SAR Lab

U8655-1 WiFi 11b 6CH Toward Ground 10mm

DUT: U8655-1; Type: HSDPA/UMTS/GPRS/GSM/EDGE Mobile Phone with Bluetooth; webphones Android" by sfr STARTRAIL II; HUAWEI ASCEND Y200; ASCEND Y200; Serial: SAR1

Communication System: WiFi(802.11b/g/n); Frequency: 2437 MHz
Medium parameters used: f = 2437 MHz; σ = 1.984 mho/m; ε_r = 51.274; ρ = 1000 kg/m^3
Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3736; ConvF(6.98, 6.98, 6.98); Calibrated: 11/23/2011
- Sensor-Surface: 4mm (Mechanical Surface Detection), z = 1.0, 31.0
- Electronics: DAE4 Sn1236; Calibrated: 11/11/2011
- Phantom: SAM4; Type: SAM; Serial: TP-1620
- DASY52 52.8.0(692); SEMCAD X 14.6.4(4989)

Configuration/Body/Area Scan (8x12x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (measured) = 0.125 mW/g

Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm
Reference Value = 6.873 V/m; Power Drift = -0.03 dB
Peak SAR (extrapolated) = 0.2790
SAR(1 g) = 0.129 mW/g; SAR(10 g) = 0.060 mW/g
Maximum value of SAR (measured) = 0.149 mW/g

Configuration/Body/Zoom Scan (7x7x7)/Cube 1: Measurement grid: dx=5mm, dy=5mm, dz=5mm
Reference Value = 6.873 V/m; Power Drift = -0.03 dB
Peak SAR (extrapolated) = 0.2160
SAR(1 g) = 0.094 mW/g; SAR(10 g) = 0.052 mW/g
Maximum value of SAR (measured) = 0.123 mW/g

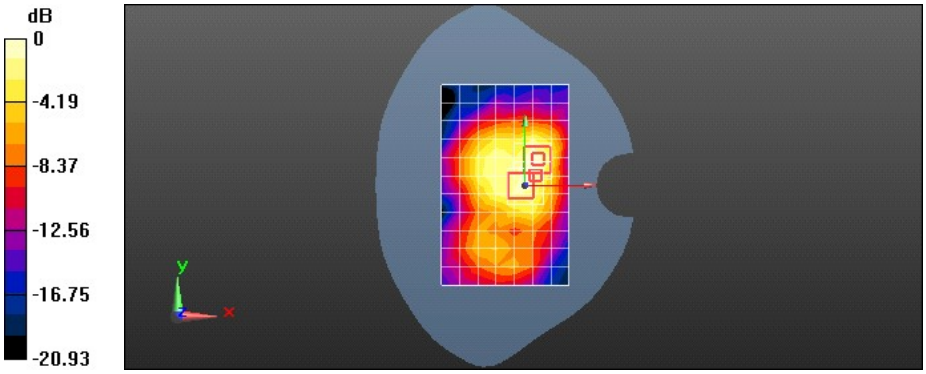

0 dB = 0.120mW/g = -18.42 dB mW/g

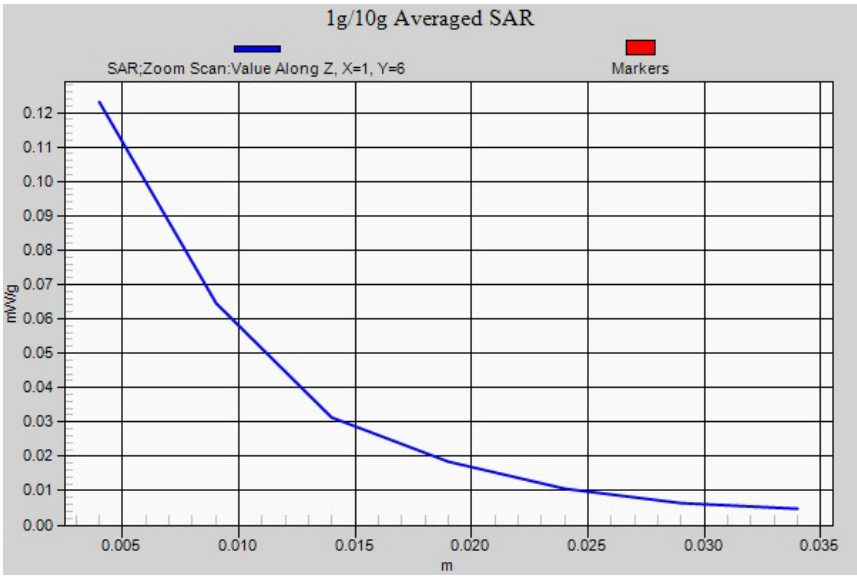

Date/Time: 2/17/2012 2:18:36

Test Laboratory: HUAWEI SAR Lab

U8655-1 WiFi 11b 6CH Left edge 10mm

DUT: U8655-1; Type: HSDPA/UMTS/GPRS/GSM/EDGE Mobile Phone with Bluetooth; webphones Android" by sfr STARTRAIL II; HUAWEI ASCEND Y200; ASCEND Y200; Serial: SAR1

Communication System: WiFi(802.11b/g/n); Frequency: 2437 MHz
Medium parameters used: f = 2437 MHz; σ = 1.984 mho/m; ε_r = 51.274; ρ = 1000 kg/m^3
Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3736; ConvF(6.98, 6.98, 6.98); Calibrated: 11/23/2011
- Sensor-Surface: 4mm (Mechanical Surface Detection), z = 1.0, 31.0
- Electronics: DAE4 Sn1236; Calibrated: 11/11/2011
- Phantom: SAM4; Type: SAM; Serial: TP-1620
- DASY52 52.8.0(692); SEMCAD X 14.6.4(4989)

Configuration/Body/Area Scan (8x12x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (measured) = 0.089 mW/g

Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm
Reference Value = 4.648 V/m; Power Drift = 0.08 dB
Peak SAR (extrapolated) = 0.1760
SAR(1 g) = 0.090 mW/g; SAR(10 g) = 0.044 mW/g
Maximum value of SAR (measured) = 0.101 mW/g

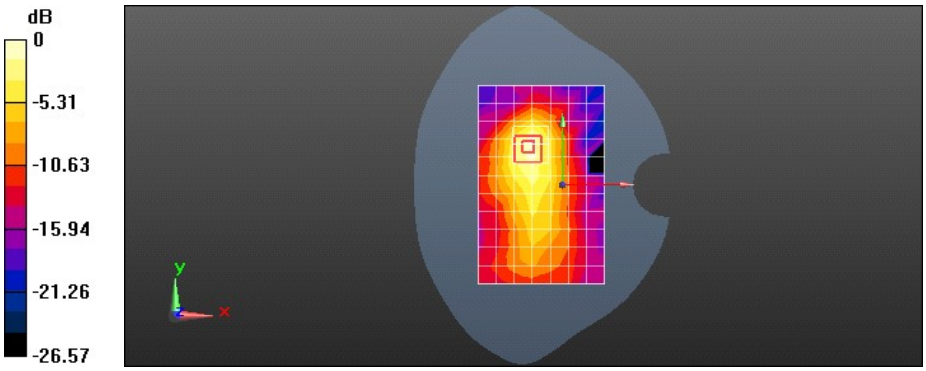

0 dB = 0.100mW/g = -20.00 dB mW/g

Date/Time: 2/17/2012 2:47:58

Test Laboratory: HUAWEI SAR Lab

U8655-1 WiFi 11b 6CH Top edge 10mm

DUT: U8655-1; Type: HSDPA/UMTS/GPRS/GSM/EDGE Mobile Phone with Bluetooth; webphones Android" by sfr STARTRAIL II; HUAWEI ASCEND Y200; ASCEND Y200; Serial: SAR1

Communication System: WiFi(802.11b/g/n); Frequency: 2437 MHz
Medium parameters used: f = 2437 MHz; σ = 1.984 mho/m; ε_r = 51.274; ρ = 1000 kg/m^3
Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3736; ConvF(6.98, 6.98, 6.98); Calibrated: 11/23/2011
- Sensor-Surface: 4mm (Mechanical Surface Detection), z = 1.0, 31.0
- Electronics: DAE4 Sn1236; Calibrated: 11/11/2011
- Phantom: SAM4; Type: SAM; Serial: TP-1620
- DASY52 52.8.0(692); SEMCAD X 14.6.4(4989)

Configuration/Body/Area Scan (8x12x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (measured) = 0.037 mW/g

Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm
Reference Value = 4.230 V/m; Power Drift = -0.12 dB
Peak SAR (extrapolated) = 0.0710
SAR(1 g) = 0.035 mW/g; SAR(10 g) = 0.019 mW/g
Maximum value of SAR (measured) = 0.039 mW/g

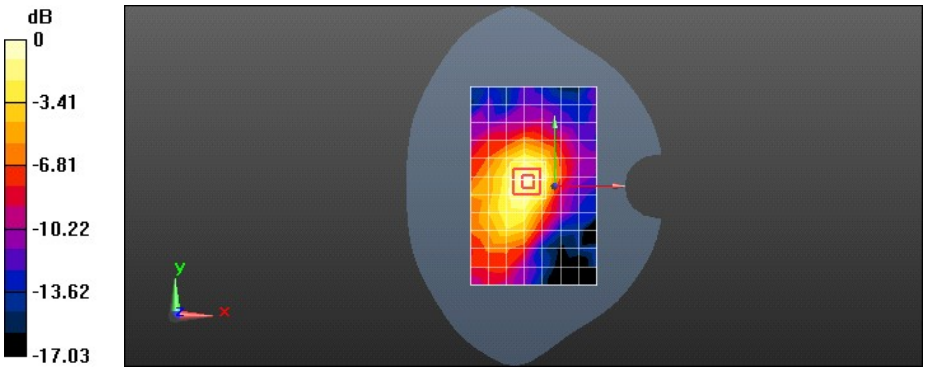

0 dB = 0.040mW/g = -27.96 dB mW/g

Date/Time: 2/17/2012 3:22:59

Test Laboratory: HUAWEI SAR Lab

U8655-1 WiFi 11b 6CH Toward Ground 10mm with The battery GAGB916XC37L1127(1250mAh)

DUT: U8655-1; Type: HSDPA/UMTS/GPRS/GSM/EDGE Mobile Phone with Bluetooth; webphones Android" by sfr STARTRAIL II; HUAWEI ASCEND Y200; ASCEND Y200; Serial: SAR1

Communication System: WiFi(802.11b/g/n); Frequency: 2437 MHz
Medium parameters used: f = 2437 MHz; σ = 1.984 mho/m; ε_r = 51.274; ρ = 1000 kg/m^3
Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3736; ConvF(6.98, 6.98, 6.98); Calibrated: 11/23/2011
- Sensor-Surface: 4mm (Mechanical Surface Detection), z = 1.0, 31.0
- Electronics: DAE4 Sn1236; Calibrated: 11/11/2011
- Phantom: SAM4; Type: SAM; Serial: TP-1620
- DASY52 52.8.0(692); SEMCAD X 14.6.4(4989)

Configuration/Body/Area Scan (8x12x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (measured) = 0.128 mW/g

Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm
Reference Value = 6.180 V/m; Power Drift = 0.05 dB
Peak SAR (extrapolated) = 0.2580
SAR(1 g) = 0.125 mW/g; SAR(10 g) = 0.059 mW/g
Maximum value of SAR (measured) = 0.144 mW/g

Configuration/Body/Zoom Scan (7x7x7)/Cube 1: Measurement grid: dx=5mm, dy=5mm, dz=5mm
Reference Value = 6.180 V/m; Power Drift = 0.05 dB
Peak SAR (extrapolated) = 0.2140
SAR(1 g) = 0.092 mW/g; SAR(10 g) = 0.054 mW/g
Maximum value of SAR (measured) = 0.122 mW/g

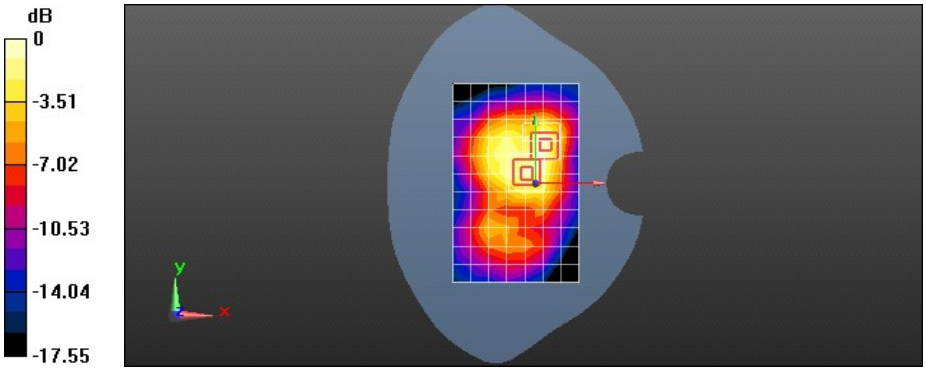

0 dB = 0.120mW/g = -18.42 dB mW/g

Date/Time: 2/17/2012 4:08:25

Test Laboratory: HUAWEI SAR Lab

U8655-1 WiFi 11b 6CH Toward Ground 10mm with The battery BAAC214F97400361(1250mAh)

DUT: U8655-1; Type: HSDPA/UMTS/GPRS/GSM/EDGE Mobile Phone with Bluetooth; webphones Android" by sfr STARTRAIL II; HUAWEI ASCEND Y200; ASCEND Y200; Serial: SAR1

Communication System: WiFi(802.11b/g/n); Frequency: 2437 MHz
Medium parameters used: f = 2437 MHz; σ = 1.984 mho/m; ε_r = 51.274; ρ = 1000 kg/m^3
Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3736; ConvF(6.98, 6.98, 6.98); Calibrated: 11/23/2011
- Sensor-Surface: 4mm (Mechanical Surface Detection), z = 1.0, 31.0
- Electronics: DAE4 Sn1236; Calibrated: 11/11/2011
- Phantom: SAM4; Type: SAM; Serial: TP-1620
- DASY52 52.8.0(692); SEMCAD X 14.6.4(4989)

Configuration/Body/Area Scan (8x12x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (measured) = 0.114 mW/g

Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm
Reference Value = 6.735 V/m; Power Drift = -0.04 dB
Peak SAR (extrapolated) = 0.2560
SAR(1 g) = 0.124 mW/g; SAR(10 g) = 0.058 mW/g
Maximum value of SAR (measured) = 0.143 mW/g

Configuration/Body/Zoom Scan (7x7x7)/Cube 1: Measurement grid: dx=5mm, dy=5mm, dz=5mm
Reference Value = 6.735 V/m; Power Drift = -0.04 dB
Peak SAR (extrapolated) = 0.1580
SAR(1 g) = 0.089 mW/g; SAR(10 g) = 0.051 mW/g
Maximum value of SAR (measured) = 0.096 mW/g

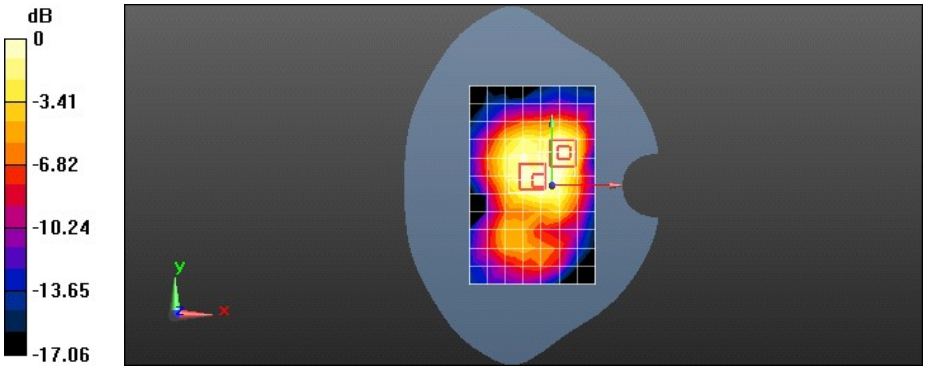

0 dB = 0.100mW/g = -20.00 dB mW/g