



Appendix B. SAR Measurement Plots

Table of contents
GSM 850 MHz Head
GSM 850 MHz Body
GSM 1900 MHz Head
GSM 1900 MHz Body
WCDMA 850 MHz Head
WCDMA 850 MHz Body
WCDMA 1900 MHz Head
WCDMA 1900 MHz Body
WiFi(802.11b) 2450 MHz Head
WiFi(802.11b) 2450 MHz Body

Test Laboratory: HUAWEI SAR Lab

U8665 GSM850 190CH Left hand touch cheek

DUT: U8665; Type: HSDPA/UMTS/GPRS/GSM/EDGE Mobile Phone with Bluetooth;; Serial: SAR2

Communication System: HW-GSM\GPRS\EGPRS-1TS; Frequency: 836.6 MHz

Medium parameters used: $f = 837$ MHz; $\sigma = 0.885$ mho/m; $\epsilon_r = 40.182$; $\rho = 1000$ kg/m³

Phantom section: Left Section

DASY Configuration:

- Probe: EX3DV4 - SN3578; ConvF(8.33, 8.33, 8.33); Calibrated: 6/21/2011
- Sensor-Surface: 4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE4 Sn852; Calibrated: 11/16/2011
- Phantom: SAM4; Type: SAM; Serial: TP-1620
- DASY52 52.8.0(692); SEMCAD X 14.6.4(4989)

Configuration/Head/Area Scan (8x12x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 0.517 mW/g


Configuration/Head/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 10.381 V/m; Power Drift = -0.04 dB

Peak SAR (extrapolated) = 0.6230

SAR(1 g) = 0.495 mW/g; SAR(10 g) = 0.376 mW/g

Maximum value of SAR (measured) = 0.519 mW/g

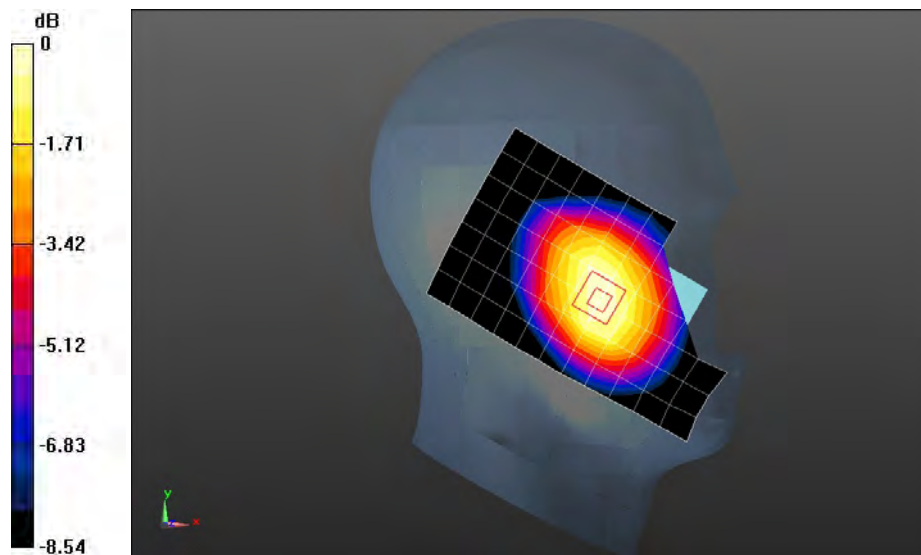

0 dB = 0.520mW/g = -5.68 dB mW/g

Test Laboratory: HUAWEI SAR Lab

U8665 GSM850 190CH Left hand tilt 15 degree

DUT: U8665; Type: HSDPA/UMTS/GPRS/GSM/EDGE Mobile Phone with Bluetooth;; Serial: SAR2

Communication System: HW-GSM\GPRS\EGPRS-1TS; Frequency: 836.6 MHz

Medium parameters used: $f = 837$ MHz; $\sigma = 0.885$ mho/m; $\epsilon_r = 40.182$; $\rho = 1000$ kg/m³

Phantom section: Left Section

DASY Configuration:

- Probe: EX3DV4 - SN3578; ConvF(8.33, 8.33, 8.33); Calibrated: 6/21/2011
- Sensor-Surface: 4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE4 Sn852; Calibrated: 11/16/2011
- Phantom: SAM4; Type: SAM; Serial: TP-1620
- DASY52 52.8.0(692); SEMCAD X 14.6.4(4989)

Configuration/Head/Area Scan (8x12x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 0.409 mW/g


Configuration/Head/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 16.159 V/m; Power Drift = 0.17 dB

Peak SAR (extrapolated) = 0.5210

SAR(1 g) = 0.410 mW/g; SAR(10 g) = 0.310 mW/g

Maximum value of SAR (measured) = 0.429 mW/g

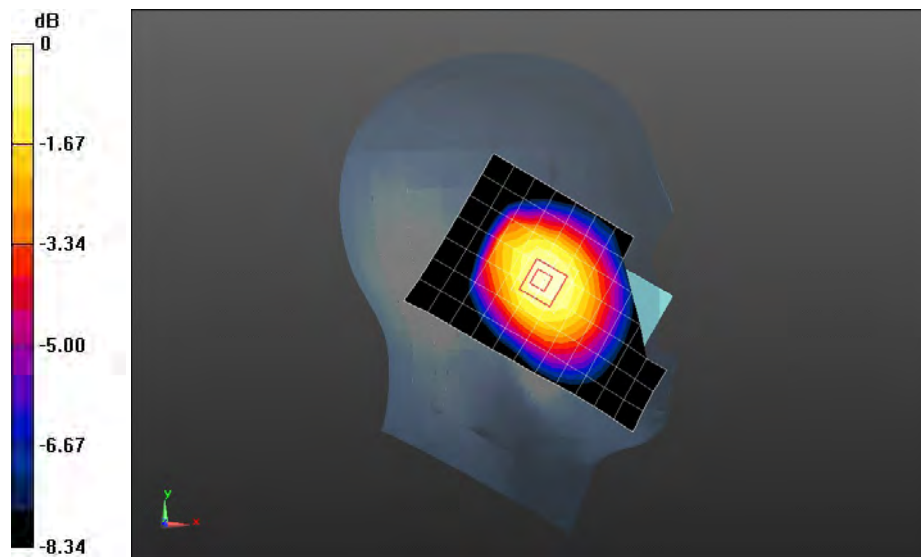

0 dB = 0.430mW/g = -7.33 dB mW/g

Test Laboratory: HUAWEI SAR Lab

U8665 GSM850 190CH Right hand touch cheek**DUT: U8665; Type: HSDPA/UMTS/GPRS/GSM/EDGE Mobile Phone with Bluetooth;; Serial: SAR2**

Communication System: HW-GSM\GPRS\EGPRS-1TS; Frequency: 836.6 MHz

Medium parameters used: $f = 837$ MHz; $\sigma = 0.885$ mho/m; $\epsilon_r = 40.182$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY Configuration:

- Probe: EX3DV4 - SN3578; ConvF(8.33, 8.33, 8.33); Calibrated: 6/21/2011
- Sensor-Surface: 4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE4 Sn852; Calibrated: 11/16/2011
- Phantom: SAM4; Type: SAM; Serial: TP-1620
- DASY52 52.8.0(692); SEMCAD X 14.6.4(4989)

Configuration/Head/Area Scan (8x12x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 0.611 mW/g


Configuration/Head/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 11.023 V/m; Power Drift = -0.14 dB

Peak SAR (extrapolated) = 0.7720

SAR(1 g) = 0.574 mW/g; SAR(10 g) = 0.432 mW/g

Maximum value of SAR (measured) = 0.605 mW/g

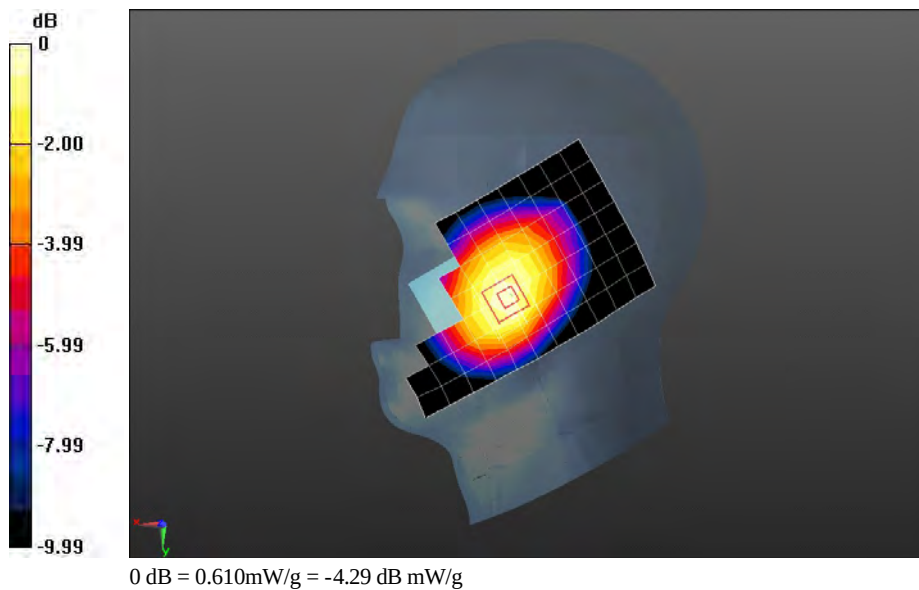

Test Laboratory: HUAWEI SAR Lab

U8665 GSM850 190CH Right hand tilt 15 degree

DUT: U8665; Type: HSDPA/UMTS/GPRS/GSM/EDGE Mobile Phone with Bluetooth;; Serial: SAR2

Communication System: HW-GSM\GPRS\EGPRS-1TS; Frequency: 836.6 MHz

Medium parameters used: $f = 837$ MHz; $\sigma = 0.885$ mho/m; $\epsilon_r = 40.182$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY Configuration:

- Probe: EX3DV4 - SN3578; ConvF(8.33, 8.33, 8.33); Calibrated: 6/21/2011
- Sensor-Surface: 4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE4 Sn852; Calibrated: 11/16/2011
- Phantom: SAM4; Type: SAM; Serial: TP-1620
- DASY52 52.8.0(692); SEMCAD X 14.6.4(4989)

Configuration/Head/Area Scan (8x12x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 0.444 mW/g


Configuration/Head/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 17.963 V/m; Power Drift = 0.03 dB

Peak SAR (extrapolated) = 0.5630

SAR(1 g) = 0.448 mW/g; SAR(10 g) = 0.339 mW/g

Maximum value of SAR (measured) = 0.472 mW/g

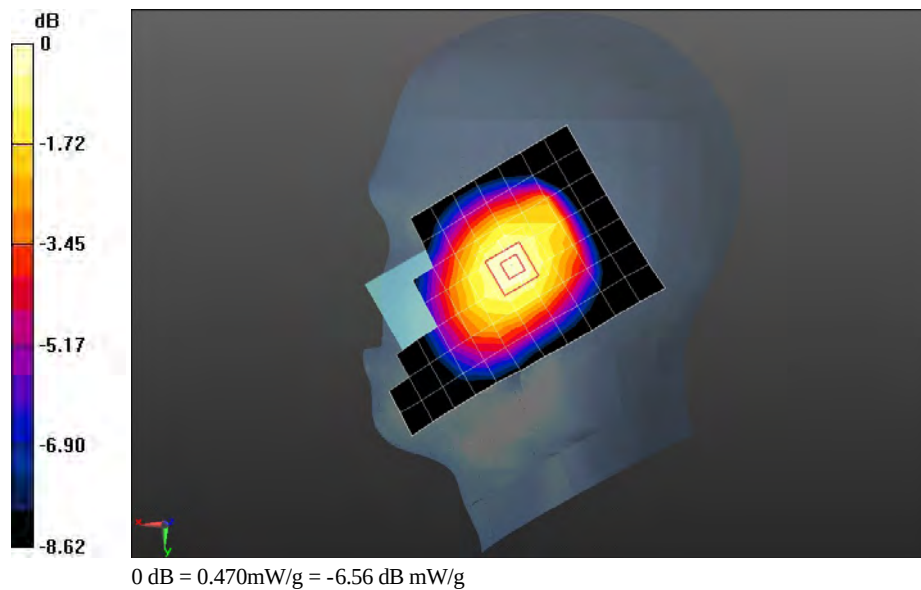

Test Laboratory: HUAWEI SAR Lab

U8665 GSM850 190CH Right hand touch cheek with battery SN-UAIBC20X03007197

DUT: U8665; Type: HSDPA/UMTS/GPRS/GSM/EDGE Mobile Phone with Bluetooth;; Serial: SAR2

Communication System: HW-GSM\GPRS\EGPRS-1TS; Frequency: 836.6 MHz

Medium parameters used: $f = 837$ MHz; $\sigma = 0.885$ mho/m; $\epsilon_r = 40.182$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY Configuration:

- Probe: EX3DV4 - SN3578; ConvF(8.33, 8.33, 8.33); Calibrated: 6/21/2011
- Sensor-Surface: 4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE4 Sn852; Calibrated: 11/16/2011
- Phantom: SAM4; Type: SAM; Serial: TP-1620
- DASY52 52.8.0(692); SEMCAD X 14.6.4(4989)

Configuration/Head/Area Scan (8x12x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 0.567 mW/g


Configuration/Head/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 10.098 V/m; Power Drift = 0.02 dB

Peak SAR (extrapolated) = 0.6710

SAR(1 g) = 0.546 mW/g; SAR(10 g) = 0.417 mW/g

Maximum value of SAR (measured) = 0.569 mW/g

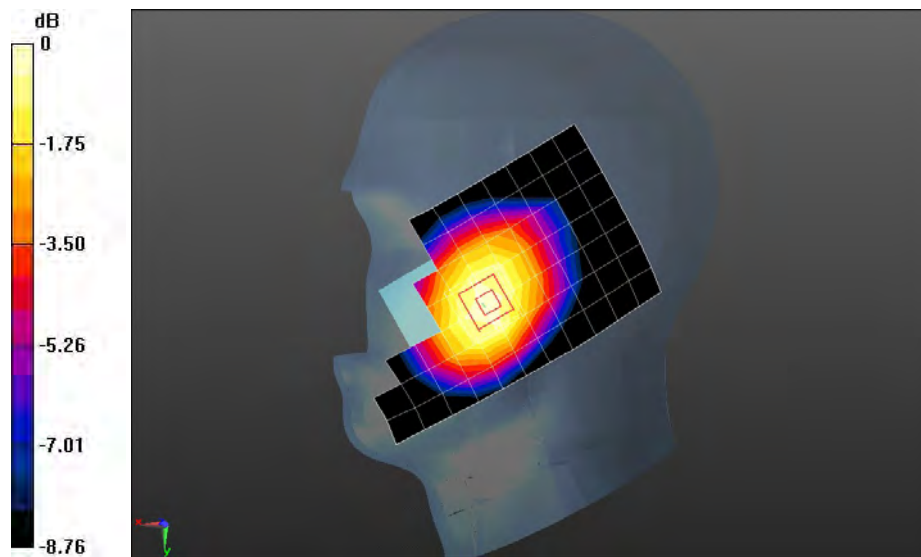

0 dB = 0.570mW/g = -4.88 dB mW/g

Test Laboratory: HUAWEI SAR Lab

U8665 GSM850 190CH Right hand touch cheek with battery SN-UNDC306X03000317

DUT: U8665; Type: HSDPA/UMTS/GPRS/GSM/EDGE Mobile Phone with Bluetooth;; Serial: SAR2

Communication System: HW-GSM\GPRS\EGPRS-1TS; Frequency: 836.6 MHz

Medium parameters used: $f = 837$ MHz; $\sigma = 0.885$ mho/m; $\epsilon_r = 40.182$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY Configuration:

- Probe: EX3DV4 - SN3578; ConvF(8.33, 8.33, 8.33); Calibrated: 6/21/2011
- Sensor-Surface: 4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE4 Sn852; Calibrated: 11/16/2011
- Phantom: SAM4; Type: SAM; Serial: TP-1620
- DASY52 52.8.0(692); SEMCAD X 14.6.4(4989)

Configuration/Head/Area Scan (8x12x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 0.570 mW/g


Configuration/Head/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 10.950 V/m; Power Drift = -0.04 dB

Peak SAR (extrapolated) = 0.6760

SAR(1 g) = 0.544 mW/g; SAR(10 g) = 0.415 mW/g

Maximum value of SAR (measured) = 0.571 mW/g

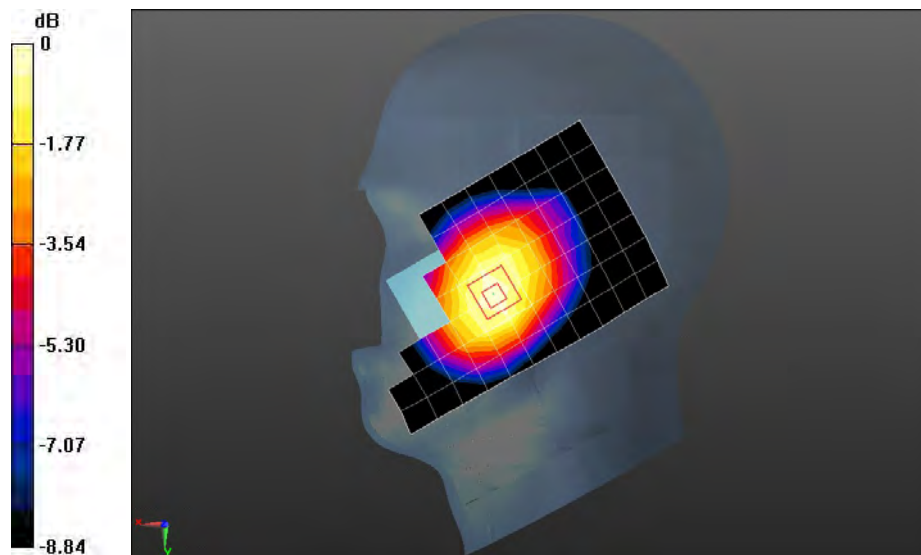

0 dB = 0.570mW/g = -4.88 dB mW/g

Test Laboratory: HUAWEI SAR Lab

U8665 GSM850 190CH Right hand touch cheek with battery SN-MHCBB066I44E1903

DUT: U8665; Type: HSDPA/UMTS/GPRS/GSM/EDGE Mobile Phone with Bluetooth;; Serial: SAR2

Communication System: HW-GSM\GPRS\EGPRS-1TS; Frequency: 836.6 MHz

Medium parameters used: $f = 837$ MHz; $\sigma = 0.885$ mho/m; $\epsilon_r = 40.182$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY Configuration:

- Probe: EX3DV4 - SN3578; ConvF(8.33, 8.33, 8.33); Calibrated: 6/21/2011
- Sensor-Surface: 4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE4 Sn852; Calibrated: 11/16/2011
- Phantom: SAM4; Type: SAM; Serial: TP-1620
- DASY52 52.8.0(692); SEMCAD X 14.6.4(4989)

Configuration/Head/Area Scan (8x12x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 0.590 mW/g


Configuration/Head/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 11.168 V/m; Power Drift = 0.11 dB

Peak SAR (extrapolated) = 0.7050

SAR(1 g) = 0.562 mW/g; SAR(10 g) = 0.428 mW/g

Maximum value of SAR (measured) = 0.597 mW/g

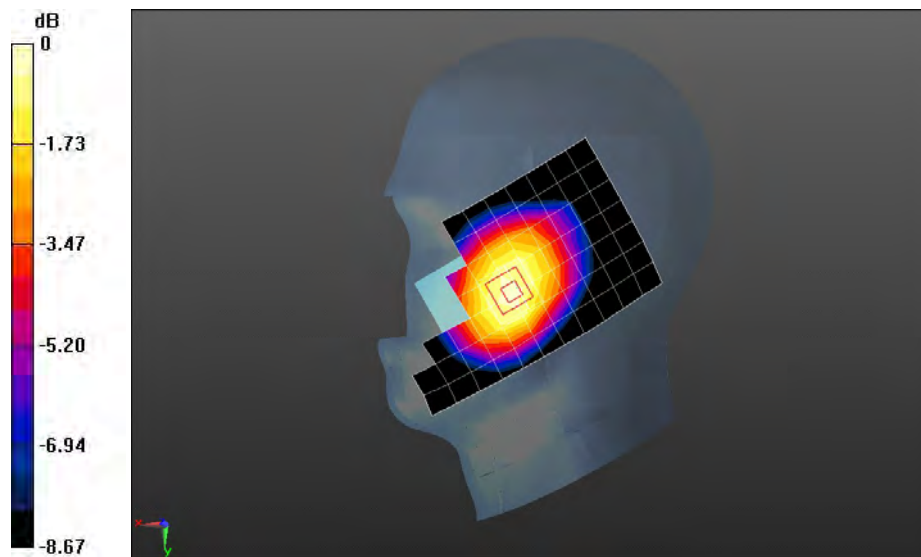

0 dB = 0.600mW/g = -4.44 dB mW/g

Test Laboratory: HUAWEI SAR Lab

U8665 GSM850 GPRS 1TS 190CH Toward Phantom 10mm

DUT: U8665; Type: HSDPA/UMTS/GPRS/GSM/EDGE Mobile Phone with Bluetooth;; Serial: SAR2

Communication System: HW-GSM\GPRS\EGPRS-1TS; Frequency: 836.6 MHz

Medium parameters used: $f = 837$ MHz; $\sigma = 0.988$ mho/m; $\epsilon_r = 54.27$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3578; ConvF(8.45, 8.45, 8.45); Calibrated: 6/21/2011
- Sensor-Surface: 4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE4 Sn852; Calibrated: 11/16/2011
- Phantom: SAM3; Type: SAM; Serial: TP-1597
- DASY52 52.8.0(692); SEMCAD X 14.6.4(4989)

Configuration/Body/Area Scan (8x11x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 0.648 mW/g


Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 25.059 V/m; Power Drift = 0.04 dB

Peak SAR (extrapolated) = 0.8060

SAR(1 g) = 0.636 mW/g; SAR(10 g) = 0.485 mW/g

Maximum value of SAR (measured) = 0.668 mW/g

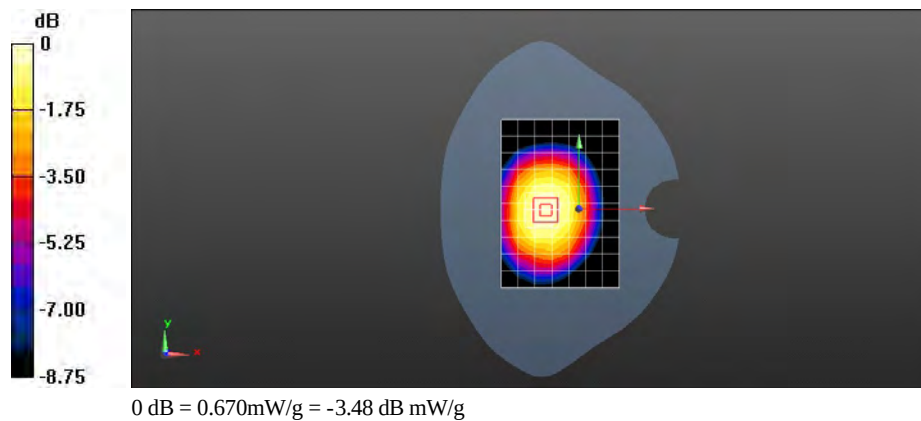

Test Laboratory: HUAWEI SAR Lab

U8665 GSM850 GPRS 2TS 190CH Toward Phantom 10mm

DUT: U8665; Type: HSDPA/UMTS/GPRS/GSM/EDGE Mobile Phone with Bluetooth;; Serial: SAR2

Communication System: HW-GSM\GPRS\EGPRS-2TS; Frequency: 836.6 MHz

Medium parameters used: $f = 837$ MHz; $\sigma = 0.988$ mho/m; $\epsilon_r = 54.27$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3578; ConvF(8.45, 8.45, 8.45); Calibrated: 6/21/2011
- Sensor-Surface: 4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE4 Sn852; Calibrated: 11/16/2011
- Phantom: SAM3; Type: SAM; Serial: TP-1597
- DASY52 52.8.0(692); SEMCAD X 14.6.4(4989)

Configuration/Body/Area Scan (8x11x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 0.700 mW/g


Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 26.444 V/m; Power Drift = -0.10 dB

Peak SAR (extrapolated) = 0.8700

SAR(1 g) = 0.684 mW/g; SAR(10 g) = 0.524 mW/g

Maximum value of SAR (measured) = 0.717 mW/g

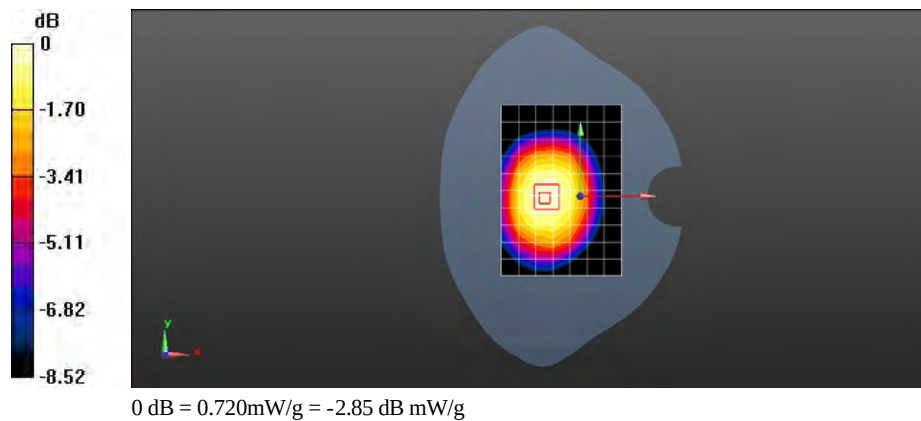

Test Laboratory: HUAWEI SAR Lab

U8665 GSM850 GPRS 2TS 251CH Towards Ground 10mm

DUT: U8665; Type: HSDPA/UMTS/GPRS/GSM/EDGE Mobile Phone with Bluetooth;; Serial: SAR2

Communication System: HW-GSM\GPRS\EGPRS-2TS; Frequency: 848.8 MHz

Medium parameters used: $f = 849$ MHz; $\sigma = 0.999$ mho/m; $\epsilon_r = 54.153$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3578; ConvF(8.45, 8.45, 8.45); Calibrated: 6/21/2011
- Sensor-Surface: 4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE4 Sn852; Calibrated: 11/16/2011
- Phantom: SAM3; Type: SAM; Serial: TP-1597
- DASY52 52.8.0(692); SEMCAD X 14.6.4(4989)

Configuration/Body/Area Scan (8x11x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 0.990 mW/g


Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 30.198 V/m; Power Drift = 0.06 dB

Peak SAR (extrapolated) = 1.2730

SAR(1 g) = 0.958 mW/g; SAR(10 g) = 0.698 mW/g

Maximum value of SAR (measured) = 1.015 mW/g

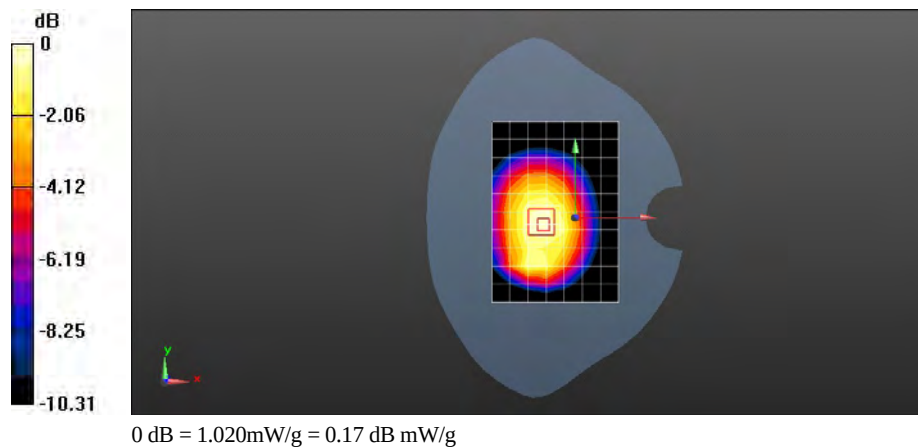

Test Laboratory: HUAWEI SAR Lab

U8665 GSM850 GPRS 2TS 190CH Towards Ground 10mm**DUT: U8665; Type: HSDPA/UMTS/GPRS/GSM/EDGE Mobile Phone with Bluetooth;; Serial: SAR2**

Communication System: HW-GSM\GPRS\EGPRS-2TS; Frequency: 836.6 MHz

Medium parameters used: $f = 837$ MHz; $\sigma = 0.988$ mho/m; $\epsilon_r = 54.27$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3578; ConvF(8.45, 8.45, 8.45); Calibrated: 6/21/2011
- Sensor-Surface: 4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE4 Sn852; Calibrated: 11/16/2011
- Phantom: SAM3; Type: SAM; Serial: TP-1597
- DASY52 52.8.0(692); SEMCAD X 14.6.4(4989)

Configuration/Body/Area Scan (8x11x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 1.163 mW/g



Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 32.860 V/m; Power Drift = -0.04 dB

Peak SAR (extrapolated) = 1.4430

SAR(1 g) = 1.11 mW/g; SAR(10 g) = 0.804 mW/g

Maximum value of SAR (measured) = 1.170 mW/g

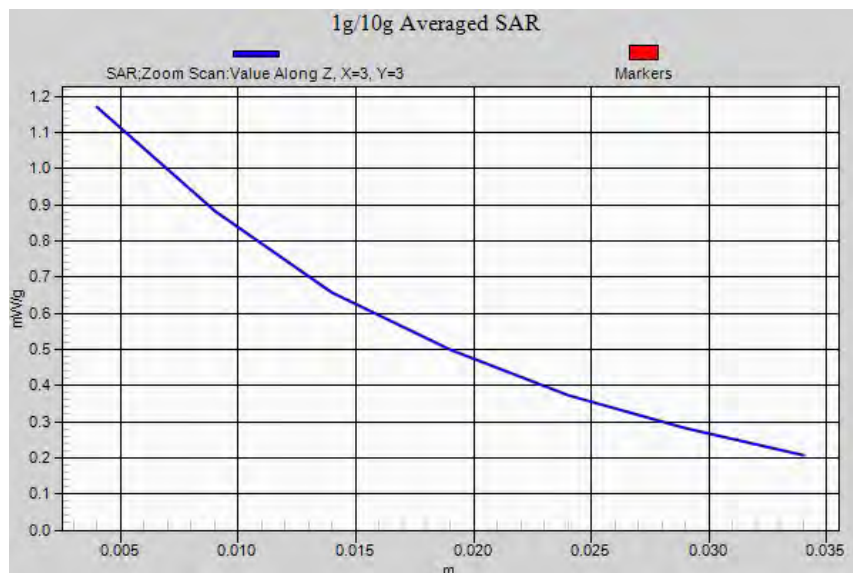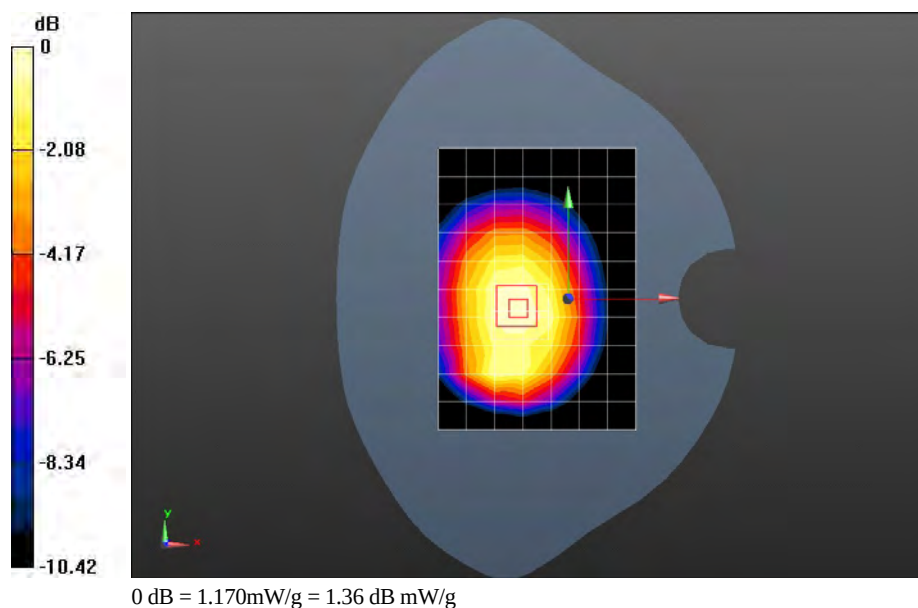

Test Laboratory: HUAWEI SAR Lab

U8665 GSM850 GPRS 2TS 128CH Towards Ground 10mm

DUT: U8665; Type: HSDPA/UMTS/GPRS/GSM/EDGE Mobile Phone with Bluetooth;; Serial: SAR2

Communication System: HW-GSM\GPRS\EGPRS-2TS; Frequency: 824.2 MHz

Medium parameters used (interpolated): $f = 824.2$ MHz; $\sigma = 0.974$ mho/m; $\epsilon_r = 54.421$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3578; ConvF(8.45, 8.45, 8.45); Calibrated: 6/21/2011
- Sensor-Surface: 4mm (Mechanical Surface Detection), $z = 1.0$, 31.0
- Electronics: DAE4 Sn852; Calibrated: 11/16/2011
- Phantom: SAM3; Type: SAM; Serial: TP-1597
- DASY52 52.8.0(692); SEMCAD X 14.6.4(4989)

Configuration/Body/Area Scan (8x11x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 1.058 mW/g

Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm


Reference Value = 31.472 V/m; Power Drift = 0.02 dB

Peak SAR (extrapolated) = 1.3300

SAR(1 g) = 1.01 mW/g; SAR(10 g) = 0.739 mW/g

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 1.075 mW/g

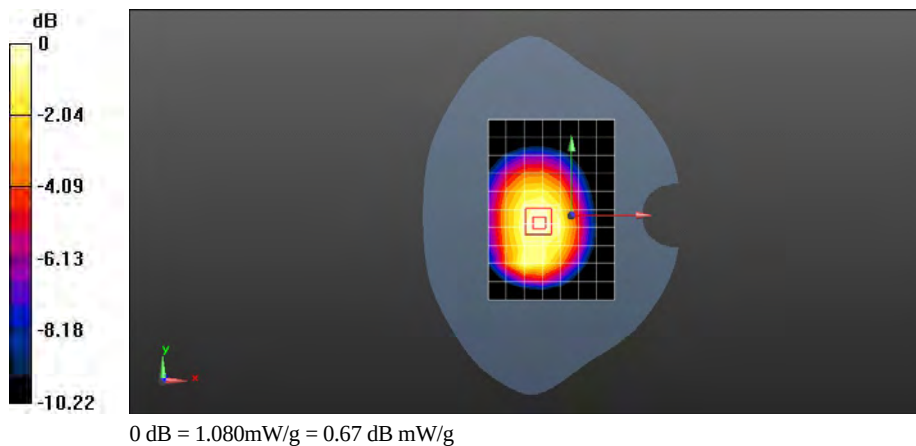

Test Laboratory: HUAWEI SAR Lab

U8665 GSM850 GPRS 2TS 190CH Left edge 10mm

DUT: U8665; Type: HSDPA/UMTS/GPRS/GSM/EDGE Mobile Phone with Bluetooth;; Serial: SAR2

Communication System: HW-GSM\GPRS\EGPRS-2TS; Frequency: 836.6 MHz

Medium parameters used: $f = 837$ MHz; $\sigma = 0.988$ mho/m; $\epsilon_r = 54.27$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3578; ConvF(8.45, 8.45, 8.45); Calibrated: 6/21/2011
- Sensor-Surface: 4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE4 Sn852; Calibrated: 11/16/2011
- Phantom: SAM3; Type: SAM; Serial: TP-1597
- DASY52 52.8.0(692); SEMCAD X 14.6.4(4989)

Configuration/Body/Area Scan (8x11x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 0.556 mW/g


Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 20.710 V/m; Power Drift = 0.07 dB

Peak SAR (extrapolated) = 0.8160

SAR(1 g) = 0.574 mW/g; SAR(10 g) = 0.396 mW/g

Maximum value of SAR (measured) = 0.615 mW/g

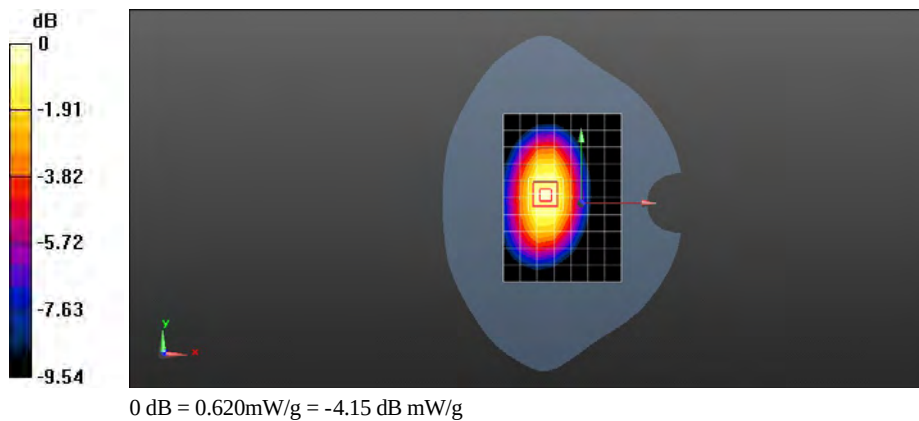

Test Laboratory: HUAWEI SAR Lab

U8665 GSM850 GPRS 2TS 190CH Right edge 10mm

DUT: U8665; Type: HSDPA/UMTS/GPRS/GSM/EDGE Mobile Phone with Bluetooth;; Serial: SAR2

Communication System: HW-GSM\GPRS\EGPRS-2TS; Frequency: 836.6 MHz

Medium parameters used: $f = 837$ MHz; $\sigma = 0.988$ mho/m; $\epsilon_r = 54.27$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3578; ConvF(8.45, 8.45, 8.45); Calibrated: 6/21/2011
- Sensor-Surface: 4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE4 Sn852; Calibrated: 11/16/2011
- Phantom: SAM3; Type: SAM; Serial: TP-1597
- DASY52 52.8.0(692); SEMCAD X 14.6.4(4989)

Configuration/Body/Area Scan (8x11x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 0.774 mW/g


Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 26.314 V/m; Power Drift = 0.04 dB

Peak SAR (extrapolated) = 1.0030

SAR(1 g) = 0.730 mW/g; SAR(10 g) = 0.511 mW/g

Maximum value of SAR (measured) = 0.775 mW/g

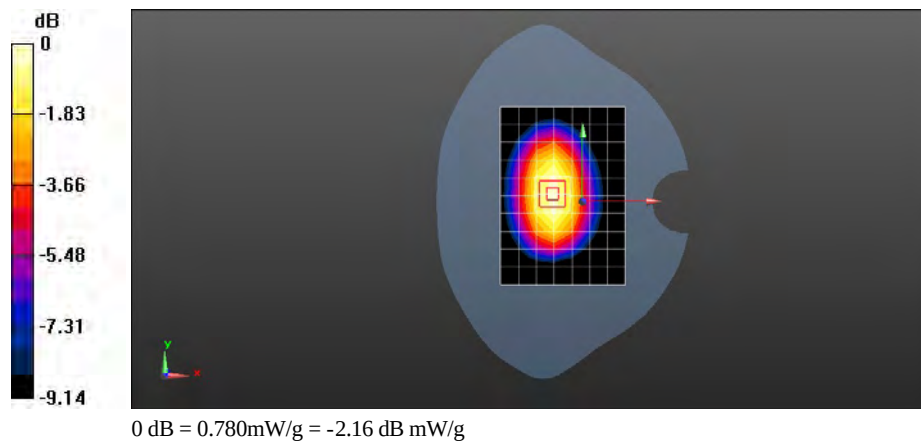

Test Laboratory: HUAWEI SAR Lab

U8665 GSM850 GPRS 2TS 190CH Bottom edge 10mm

DUT: U8665; Type: HSDPA/UMTS/GPRS/GSM/EDGE Mobile Phone with Bluetooth;; Serial: SAR2

Communication System: HW-GSM\GPRS\EGPRS-2TS; Frequency: 836.6 MHz

Medium parameters used: $f = 837$ MHz; $\sigma = 0.988$ mho/m; $\epsilon_r = 54.27$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3578; ConvF(8.45, 8.45, 8.45); Calibrated: 6/21/2011
- Sensor-Surface: 4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE4 Sn852; Calibrated: 11/16/2011
- Phantom: SAM3; Type: SAM; Serial: TP-1597
- DASY52 52.8.0(692); SEMCAD X 14.6.4(4989)

Configuration/Body/Area Scan (8x11x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 0.153 mW/g


Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 12.543 V/m; Power Drift = -0.05 dB

Peak SAR (extrapolated) = 0.2230

SAR(1 g) = 0.148 mW/g; SAR(10 g) = 0.094 mW/g

Maximum value of SAR (measured) = 0.159 mW/g

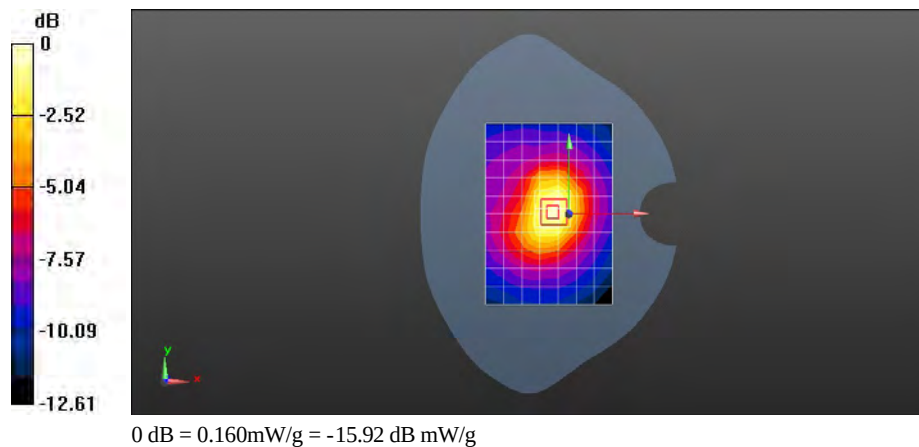

Test Laboratory: HUAWEI SAR Lab

U8665 GSM850 EGPRS 1TS 251CH Towards Ground 10mm

DUT: U8665; Type: HSDPA/UMTS/GPRS/GSM/EDGE Mobile Phone with Bluetooth;; Serial: SAR2

Communication System: HW-GSM\GPRS\EGPRS-1TS; Frequency: 848.8 MHz

Medium parameters used: $f = 849$ MHz; $\sigma = 0.999$ mho/m; $\epsilon_r = 54.153$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3578; ConvF(8.45, 8.45, 8.45); Calibrated: 6/21/2011
- Sensor-Surface: 4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE4 Sn852; Calibrated: 11/16/2011
- Phantom: SAM3; Type: SAM; Serial: TP-1597
- DASY52 52.8.0(692); SEMCAD X 14.6.4(4989)

Configuration/Body/Area Scan (8x11x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 0.829 mW/g


Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 26.240 V/m; Power Drift = 0.07 dB

Peak SAR (extrapolated) = 1.0700

SAR(1 g) = 0.801 mW/g; SAR(10 g) = 0.582 mW/g

Maximum value of SAR (measured) = 0.846 mW/g

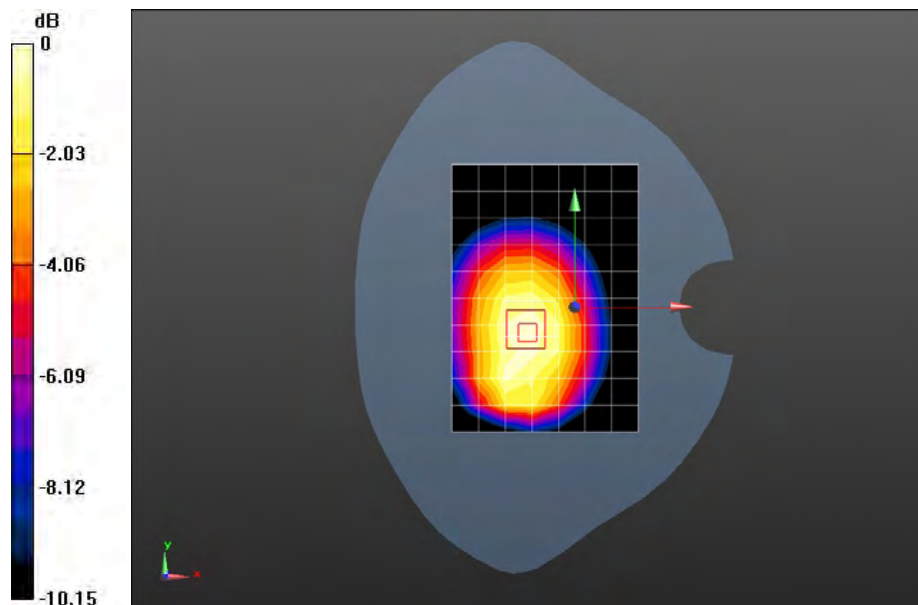

0 dB = 0.850mW/g = -1.41 dB mW/g

Test Laboratory: HUAWEI SAR Lab

U8665 GSM850 EGPRS 1TS 190CH Towards Ground 10mm

DUT: U8665; Type: HSDPA/UMTS/GPRS/GSM/EDGE Mobile Phone with Bluetooth;; Serial: SAR2

Communication System: HW-GSM\GPRS\EGPRS-1TS; Frequency: 836.6 MHz

Medium parameters used: $f = 837$ MHz; $\sigma = 0.988$ mho/m; $\epsilon_r = 54.27$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3578; ConvF(8.45, 8.45, 8.45); Calibrated: 6/21/2011
- Sensor-Surface: 4mm (Mechanical Surface Detection), $z = 1.0$, 31.0
- Electronics: DAE4 Sn852; Calibrated: 11/16/2011
- Phantom: SAM3; Type: SAM; Serial: TP-1597
- DASY52 52.8.0(692); SEMCAD X 14.6.4(4989)

Configuration/Body/Area Scan (8x11x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 1.085 mW/g


Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 31.590 V/m; Power Drift = 0.07 dB

Peak SAR (extrapolated) = 1.3660

SAR(1 g) = 1.04 mW/g; SAR(10 g) = 0.757 mW/g

Maximum value of SAR (measured) = 1.095 mW/g

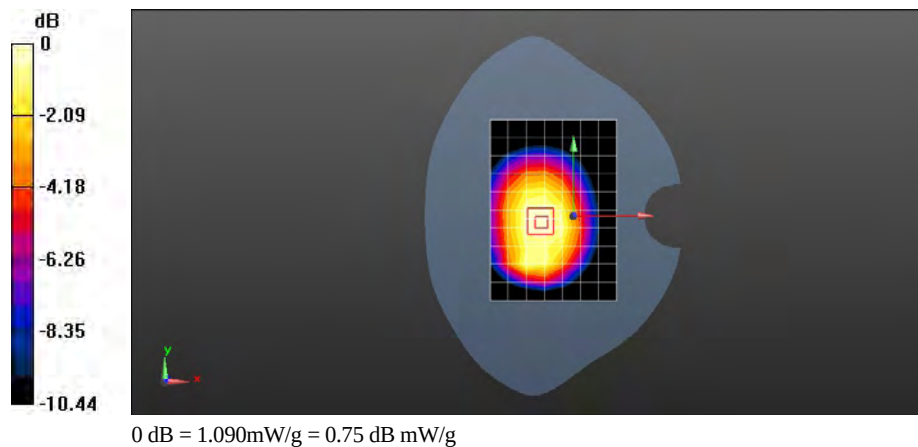

Test Laboratory: HUAWEI SAR Lab

U8665 GSM850 EGPRS 1TS 128CH Towards Ground 10mm

DUT: U8665; Type: HSDPA/UMTS/GPRS/GSM/EDGE Mobile Phone with Bluetooth;; Serial: SAR2

Communication System: HW-GSM\GPRS\EGPRS-1TS; Frequency: 824.2 MHz

Medium parameters used (interpolated): $f = 824.2$ MHz; $\sigma = 0.974$ mho/m; $\epsilon_r = 54.421$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3578; ConvF(8.45, 8.45, 8.45); Calibrated: 6/21/2011
- Sensor-Surface: 4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE4 Sn852; Calibrated: 11/16/2011
- Phantom: SAM3; Type: SAM; Serial: TP-1597
- DASY52 52.8.0(692); SEMCAD X 14.6.4(4989)

Configuration/Body/Area Scan (8x11x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.951 mW/g

Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm


Reference Value = 28.249 V/m; Power Drift = 0.03 dB

Peak SAR (extrapolated) = 1.2380

SAR(1 g) = 0.922 mW/g; SAR(10 g) = 0.671 mW/g

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.973 mW/g

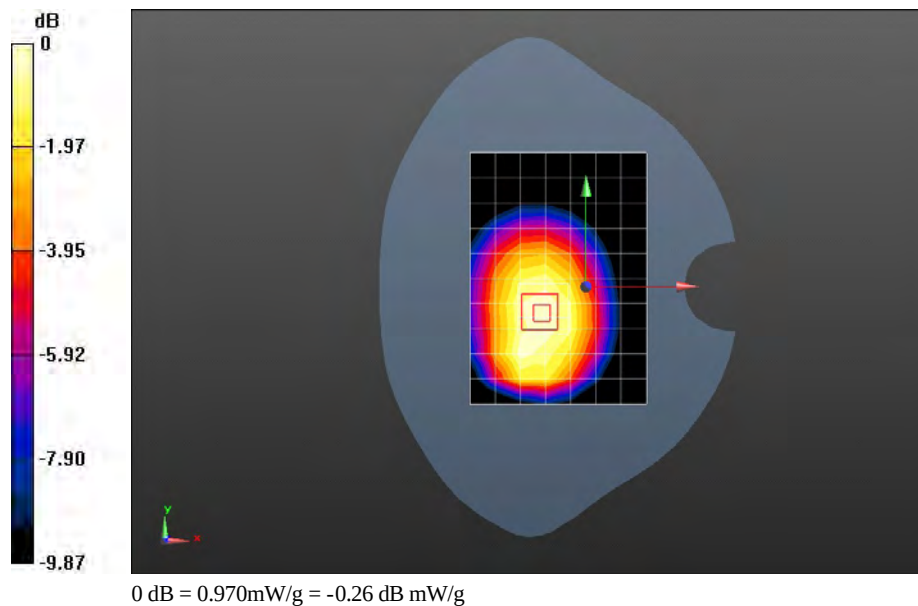

Test Laboratory: HUAWEI SAR Lab

U8665 GSM850 EGPRS 2TS 251CH Towards Ground 10mm

DUT: U8665; Type: HSDPA/UMTS/GPRS/GSM/EDGE Mobile Phone with Bluetooth;; Serial: SAR2

Communication System: HW-GSM\GPRS\EGPRS-2TS; Frequency: 848.8 MHz

Medium parameters used: $f = 849$ MHz; $\sigma = 0.999$ mho/m; $\epsilon_r = 54.153$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3578; ConvF(8.45, 8.45, 8.45); Calibrated: 6/21/2011
- Sensor-Surface: 4mm (Mechanical Surface Detection), $z = 2.0, 32.0$
- Electronics: DAE4 Sn852; Calibrated: 11/16/2011
- Phantom: SAM3; Type: SAM; Serial: TP-1597
- DASY52 52.8.0(692); SEMCAD X 14.6.4(4989)

Configuration/Body/Area Scan (8x11x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 0.942 mW/g


Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 28.565 V/m; Power Drift = 0.06 dB

Peak SAR (extrapolated) = 1.1650

SAR(1 g) = 0.899 mW/g; SAR(10 g) = 0.655 mW/g

Maximum value of SAR (measured) = 0.951 mW/g

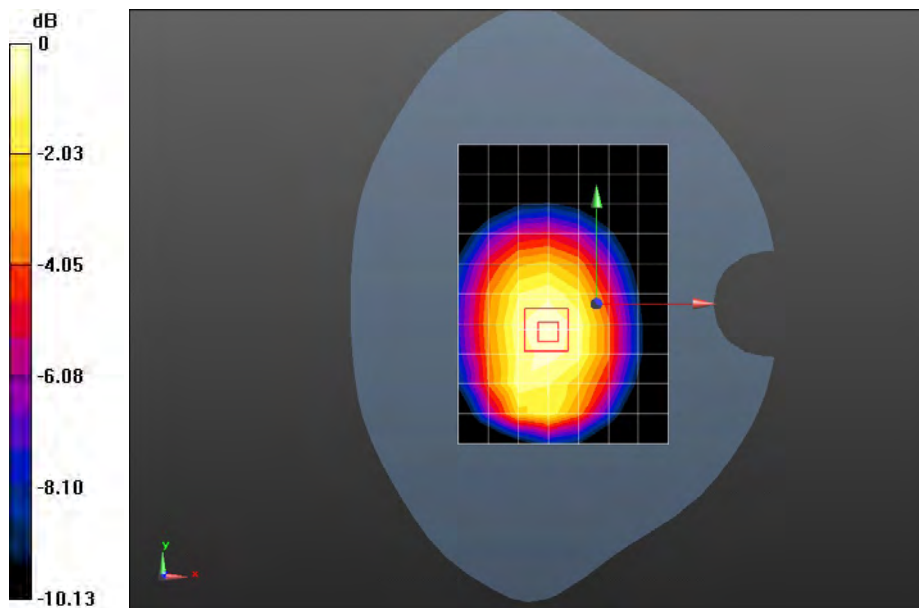

0 dB = 0.950mW/g = -0.45 dB mW/g

Test Laboratory: HUAWEI SAR Lab

U8665 GSM850 EGPRS 2TS 190CH Towards Ground 10mm

DUT: U8665; Type: HSDPA/UMTS/GPRS/GSM/EDGE Mobile Phone with Bluetooth;; Serial: SAR2

Communication System: HW-GSM\GPRS\EGPRS-2TS; Frequency: 836.6 MHz

Medium parameters used: $f = 837$ MHz; $\sigma = 0.988$ mho/m; $\epsilon_r = 54.27$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3578; ConvF(8.45, 8.45, 8.45); Calibrated: 6/21/2011
- Sensor-Surface: 4mm (Mechanical Surface Detection), $z = 2.0, 32.0$
- Electronics: DAE4 Sn852; Calibrated: 11/16/2011
- Phantom: SAM3; Type: SAM; Serial: TP-1597
- DASY52 52.8.0(692); SEMCAD X 14.6.4(4989)

Configuration/Body/Area Scan (8x11x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 1.110 mW/g


Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 31.048 V/m; Power Drift = -0.03 dB

Peak SAR (extrapolated) = 1.4450

SAR(1 g) = 1.07 mW/g; SAR(10 g) = 0.773 mW/g

Maximum value of SAR (measured) = 1.121 mW/g

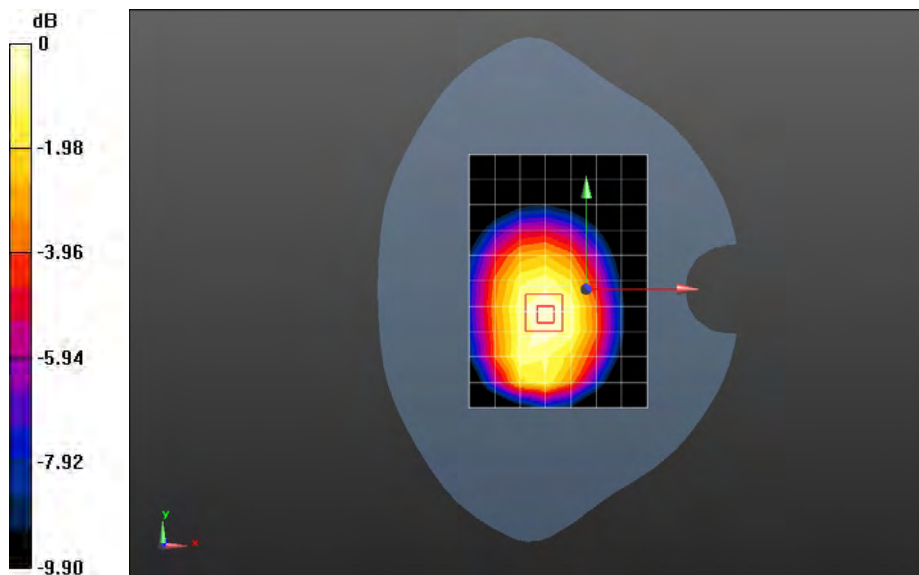

0 dB = 1.120mW/g = 0.98 dB mW/g

Test Laboratory: HUAWEI SAR Lab

U8665 GSM850 EGPRS 2TS 128CH Towards Ground 10mm

DUT: U8665; Type: HSDPA/UMTS/GPRS/GSM/EDGE Mobile Phone with Bluetooth;; Serial: SAR2

Communication System: HW-GSM\GPRS\EGPRS-2TS; Frequency: 824.2 MHz

Medium parameters used (interpolated): $f = 824.2$ MHz; $\sigma = 0.974$ mho/m; $\epsilon_r = 54.421$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3578; ConvF(8.45, 8.45, 8.45); Calibrated: 6/21/2011
- Sensor-Surface: 4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE4 Sn852; Calibrated: 11/16/2011
- Phantom: SAM3; Type: SAM; Serial: TP-1597
- DASY52 52.8.0(692); SEMCAD X 14.6.4(4989)

Configuration/Body/Area Scan (8x11x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 1.019 mW/g

Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm


Reference Value = 29.235 V/m; Power Drift = -0.03 dB

Peak SAR (extrapolated) = 1.2740

SAR(1 g) = 0.982 mW/g; SAR(10 g) = 0.721 mW/g

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 1.033 mW/g

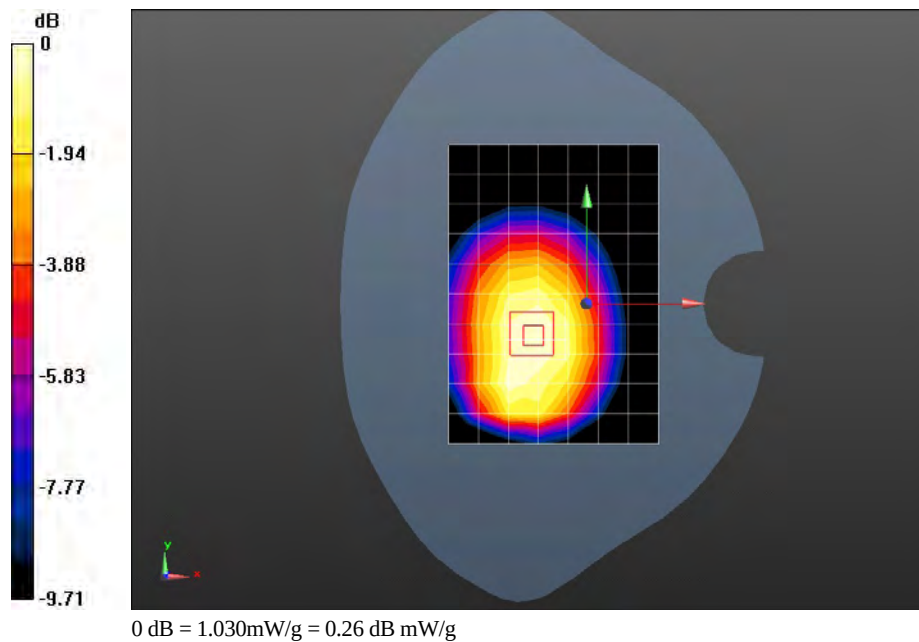

Test Laboratory: HUAWEI SAR Lab

U8665 GSM850 GPRS 2TS 190CH Towards Ground 10mm with battery SN-UAIBC20X03007197

DUT: U8665; Type: HSDPA/UMTS/GPRS/GSM/EDGE Mobile Phone with Bluetooth;; Serial: SAR2

Communication System: HW-GSM\GPRS\EGPRS-2TS; Frequency: 836.6 MHz

Medium parameters used: $f = 837$ MHz; $\sigma = 0.988$ mho/m; $\epsilon_r = 54.27$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3578; ConvF(8.45, 8.45, 8.45); Calibrated: 6/21/2011
- Sensor-Surface: 4mm (Mechanical Surface Detection), $z = 2.0, 32.0$
- Electronics: DAE4 Sn852; Calibrated: 11/16/2011
- Phantom: SAM3; Type: SAM; Serial: TP-1597
- DASY52 52.8.0(692); SEMCAD X 14.6.4(4989)

Configuration/Body/Area Scan (8x11x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 1.098 mW/g


Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 31.038 V/m; Power Drift = -0.10 dB

Peak SAR (extrapolated) = 1.4230

SAR(1 g) = 1.07 mW/g; SAR(10 g) = 0.774 mW/g

Maximum value of SAR (measured) = 1.125 mW/g

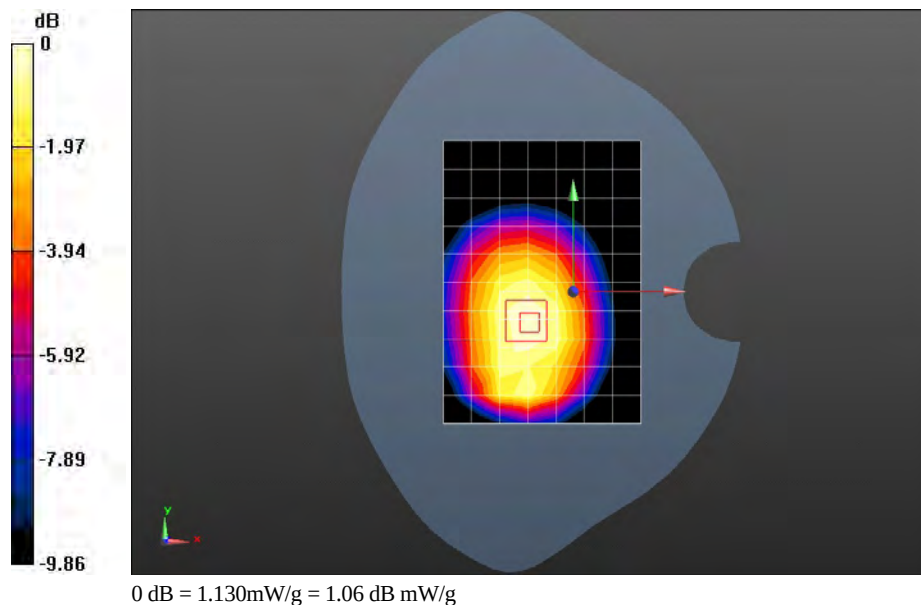

Test Laboratory: HUAWEI SAR Lab

U8665 GSM850 GPRS 2TS 190CH Towards Ground 10mm with battery SN-UNDC306X03000317

DUT: U8665; Type: HSDPA/UMTS/GPRS/GSM/EDGE Mobile Phone with Bluetooth;; Serial: SAR2

Communication System: HW-GSM\GPRS\EGPRS-2TS; Frequency: 836.6 MHz

Medium parameters used: $f = 837$ MHz; $\sigma = 0.988$ mho/m; $\epsilon_r = 54.27$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3578; ConvF(8.45, 8.45, 8.45); Calibrated: 6/21/2011
- Sensor-Surface: 4mm (Mechanical Surface Detection), $z = 2.0, 32.0$
- Electronics: DAE4 Sn852; Calibrated: 11/16/2011
- Phantom: SAM3; Type: SAM; Serial: TP-1597
- DASY52 52.8.0(692); SEMCAD X 14.6.4(4989)

Configuration/Body/Area Scan (8x11x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 1.095 mW/g


Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 30.633 V/m; Power Drift = -0.17 dB

Peak SAR (extrapolated) = 1.4530

SAR(1 g) = 1.07 mW/g; SAR(10 g) = 0.777 mW/g

Maximum value of SAR (measured) = 1.125 mW/g

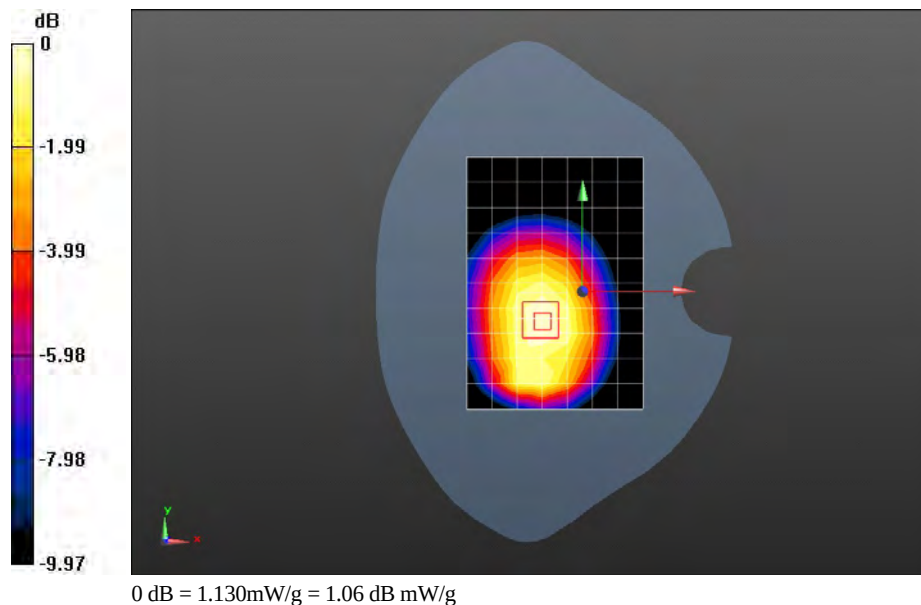

Test Laboratory: HUAWEI SAR Lab

U8665 GSM850 GPRS 2TS 190CH Towards Ground 10mm with battery SN-MHCBB066I44E1903

DUT: U8665; Type: HSDPA/UMTS/GPRS/GSM/EDGE Mobile Phone with Bluetooth;; Serial: SAR2

Communication System: HW-GSM\GPRS\EGPRS-2TS; Frequency: 836.6 MHz

Medium parameters used: $f = 837$ MHz; $\sigma = 0.988$ mho/m; $\epsilon_r = 54.27$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3578; ConvF(8.45, 8.45, 8.45); Calibrated: 6/21/2011
- Sensor-Surface: 4mm (Mechanical Surface Detection), $z = 2.0, 32.0$
- Electronics: DAE4 Sn852; Calibrated: 11/16/2011
- Phantom: SAM3; Type: SAM; Serial: TP-1597
- DASY52 52.8.0(692); SEMCAD X 14.6.4(4989)

Configuration/Body/Area Scan (8x11x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 1.092 mW/g


Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 30.111 V/m; Power Drift = -0.13 dB

Peak SAR (extrapolated) = 1.3640

SAR(1 g) = 1.05 mW/g; SAR(10 g) = 0.763 mW/g

Maximum value of SAR (measured) = 1.116 mW/g

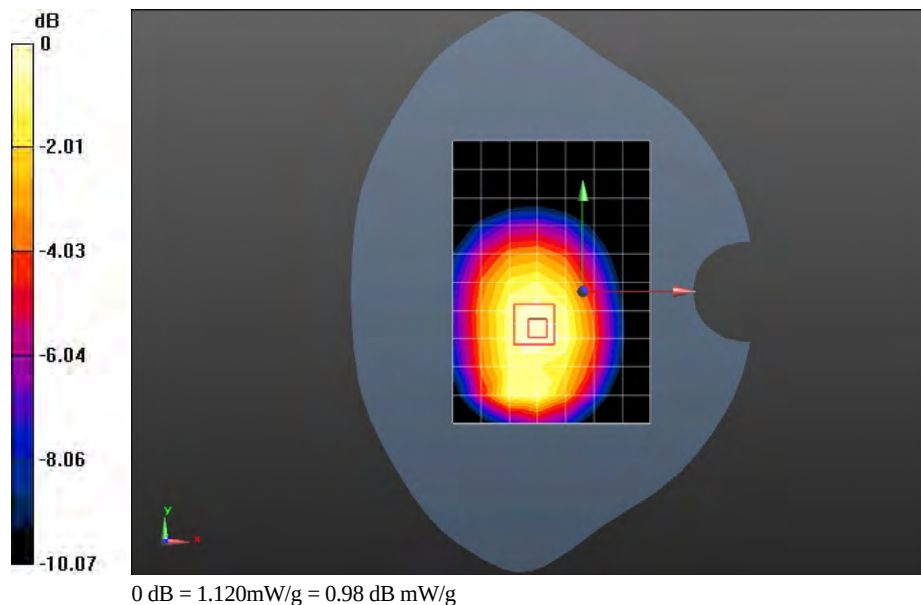

Test Laboratory: HUAWEI SAR Lab

U8665 GSM850 GPRS 1TS 190CH Towards Phantom 15mm

DUT: U8665; Type: HSDPA/UMTS/GPRS/GSM/EDGE Mobile Phone with Bluetooth;; Serial: SAR2

Communication System: HW-GSM\GPRS\EGPRS-1TS; Frequency: 836.6 MHz

Medium parameters used: $f = 837$ MHz; $\sigma = 0.988$ mho/m; $\epsilon_r = 54.27$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3578; ConvF(8.45, 8.45, 8.45); Calibrated: 6/21/2011
- Sensor-Surface: 4mm (Mechanical Surface Detection), $z = 2.0, 32.0$
- Electronics: DAE4 Sn852; Calibrated: 11/16/2011
- Phantom: SAM3; Type: SAM; Serial: TP-1597
- DASY52 52.8.0(692); SEMCAD X 14.6.4(4989)

Configuration/Body/Area Scan (8x11x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 0.561 mW/g


Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 22.638 V/m; Power Drift = -0.01 dB

Peak SAR (extrapolated) = 0.7130

SAR(1 g) = 0.542 mW/g; SAR(10 g) = 0.406 mW/g

Maximum value of SAR (measured) = 0.567 mW/g

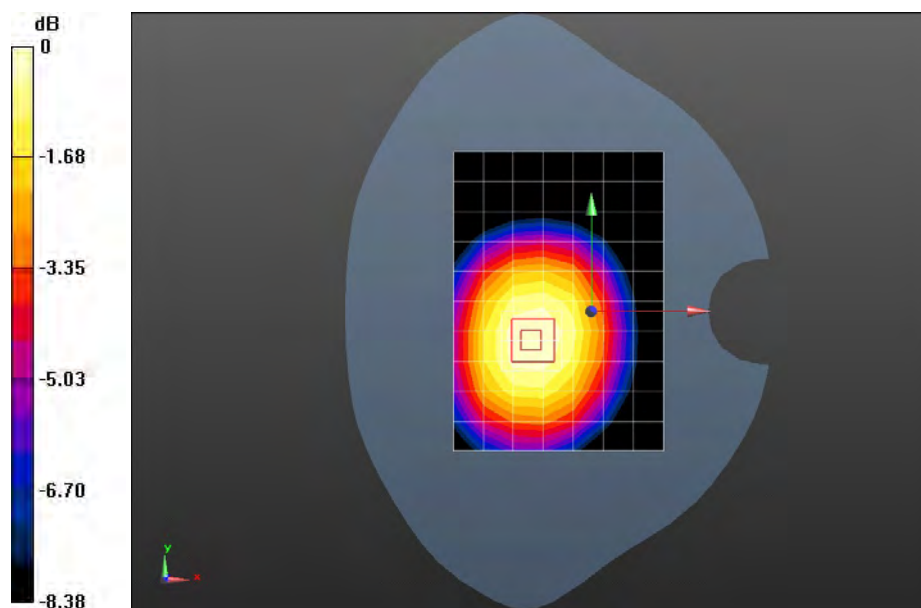

0 dB = 0.570mW/g = -4.88 dB mW/g

Test Laboratory: HUAWEI SAR Lab

U8665 GSM850 GPRS 2TS 190CH Towards Phantom 15mm

DUT: U8665; Type: HSDPA/UMTS/GPRS/GSM/EDGE Mobile Phone with Bluetooth;; Serial: SAR2

Communication System: HW-GSM\GPRS\EGPRS-2TS; Frequency: 836.6 MHz

Medium parameters used: $f = 837$ MHz; $\sigma = 0.988$ mho/m; $\epsilon_r = 54.27$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3578; ConvF(8.45, 8.45, 8.45); Calibrated: 6/21/2011
- Sensor-Surface: 4mm (Mechanical Surface Detection), $z = 2.0, 32.0$
- Electronics: DAE4 Sn852; Calibrated: 11/16/2011
- Phantom: SAM3; Type: SAM; Serial: TP-1597
- DASY52 52.8.0(692); SEMCAD X 14.6.4(4989)

Configuration/Body/Area Scan (8x11x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 0.603 mW/g


Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 23.664 V/m; Power Drift = -0.06 dB

Peak SAR (extrapolated) = 0.7330

SAR(1 g) = 0.581 mW/g; SAR(10 g) = 0.439 mW/g

Maximum value of SAR (measured) = 0.608 mW/g

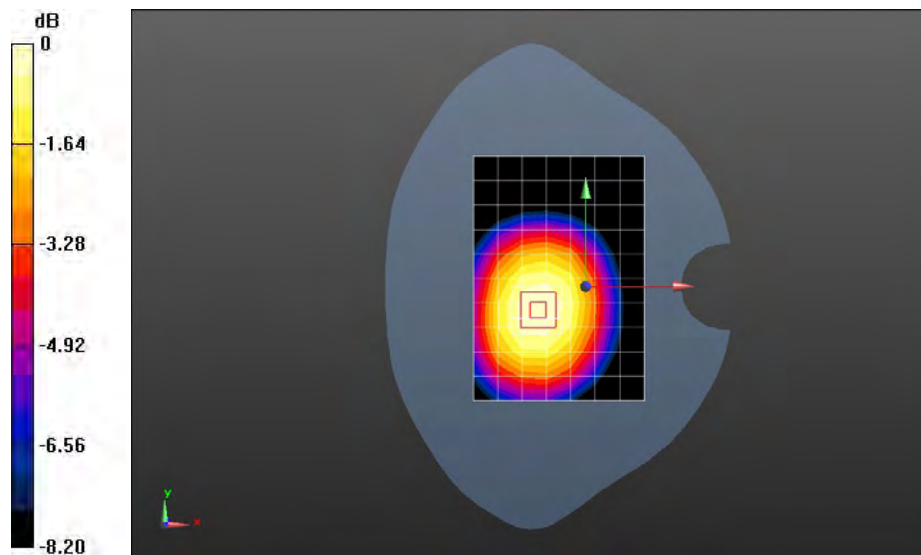

0 dB = 0.610mW/g = -4.29 dB mW/g

Test Laboratory: HUAWEI SAR Lab

U8665 GSM850 GPRS 2TS 251CH Towards Ground 15mm

DUT: U8665; Type: HSDPA/UMTS/GPRS/GSM/EDGE Mobile Phone with Bluetooth;; Serial: SAR2

Communication System: HW-GSM\GPRS\EGPRS-2TS; Frequency: 848.8 MHz

Medium parameters used: $f = 849$ MHz; $\sigma = 0.999$ mho/m; $\epsilon_r = 54.153$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3578; ConvF(8.45, 8.45, 8.45); Calibrated: 6/21/2011
- Sensor-Surface: 4mm (Mechanical Surface Detection), $z = 2.0, 32.0$
- Electronics: DAE4 Sn852; Calibrated: 11/16/2011
- Phantom: SAM3; Type: SAM; Serial: TP-1597
- DASY52 52.8.0(692); SEMCAD X 14.6.4(4989)

Configuration/Body/Area Scan (8x11x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 0.792 mW/g


Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 26.091 V/m; Power Drift = 0.10 dB

Peak SAR (extrapolated) = 0.9720

SAR(1 g) = 0.753 mW/g; SAR(10 g) = 0.551 mW/g

Maximum value of SAR (measured) = 0.793 mW/g

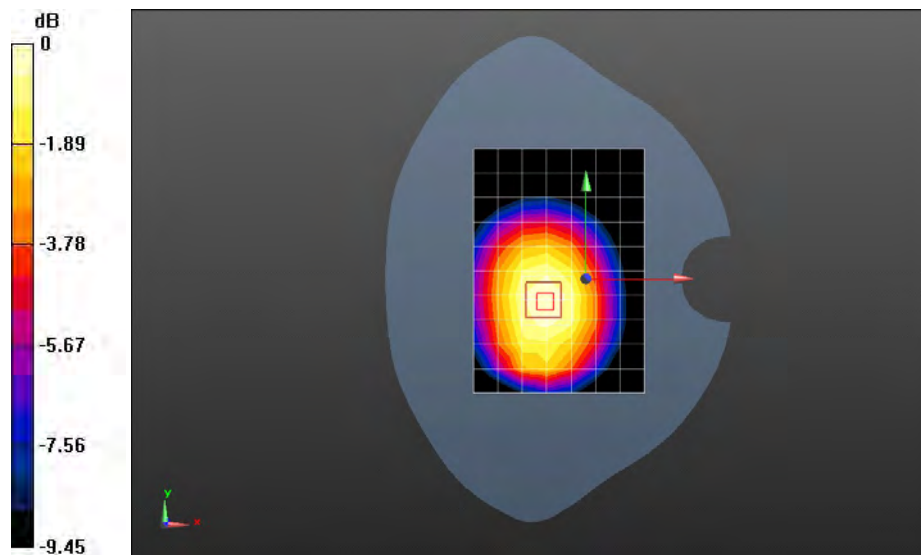

0 dB = 0.790mW/g = -2.05 dB mW/g

Test Laboratory: HUAWEI SAR Lab

U8665 GSM850 GPRS 2TS 190CH Towards Ground 15mm

DUT: U8665; Type: HSDPA/UMTS/GPRS/GSM/EDGE Mobile Phone with Bluetooth;; Serial: SAR2

Communication System: HW-GSM\GPRS\EGPRS-2TS; Frequency: 836.6 MHz

Medium parameters used: $f = 837$ MHz; $\sigma = 0.988$ mho/m; $\epsilon_r = 54.27$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3578; ConvF(8.45, 8.45, 8.45); Calibrated: 6/21/2011
- Sensor-Surface: 4mm (Mechanical Surface Detection), $z = 2.0, 32.0$
- Electronics: DAE4 Sn852; Calibrated: 11/16/2011
- Phantom: SAM3; Type: SAM; Serial: TP-1597
- DASY52 52.8.0(692); SEMCAD X 14.6.4(4989)

Configuration/Body/Area Scan (8x11x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 0.882 mW/g


Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 27.863 V/m; Power Drift = 0.04 dB

Peak SAR (extrapolated) = 1.1170

SAR(1 g) = 0.852 mW/g; SAR(10 g) = 0.624 mW/g

Maximum value of SAR (measured) = 0.897 mW/g

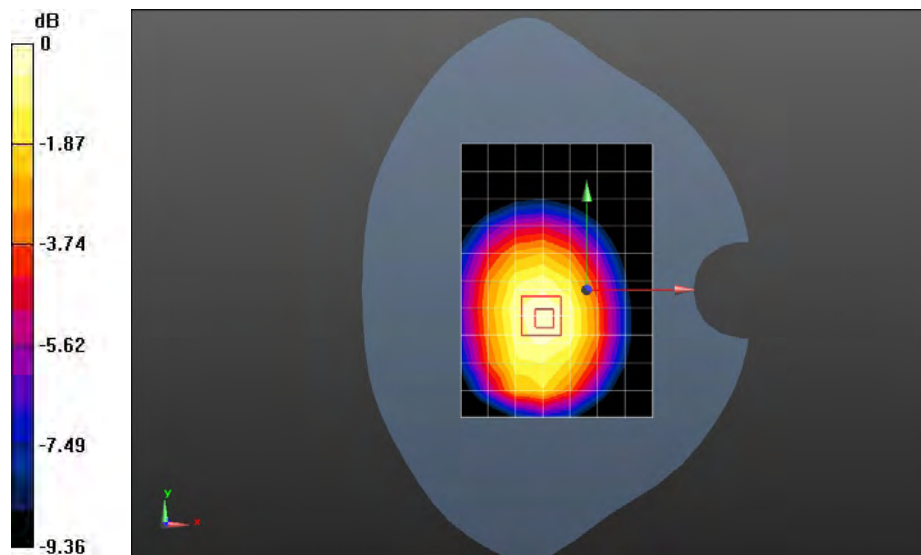

0 dB = 0.900mW/g = -0.92 dB mW/g

Test Laboratory: HUAWEI SAR Lab

U8665 GSM850 GPRS 2TS 128CH Towards Ground 15mm

DUT: U8665; Type: HSDPA/UMTS/GPRS/GSM/EDGE Mobile Phone with Bluetooth;; Serial: SAR2

Communication System: HW-GSM\GPRS\EGPRS-2TS; Frequency: 824.2 MHz

Medium parameters used (interpolated): $f = 824.2$ MHz; $\sigma = 0.974$ mho/m; $\epsilon_r = 54.421$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3578; ConvF(8.45, 8.45, 8.45); Calibrated: 6/21/2011
- Sensor-Surface: 4mm (Mechanical Surface Detection), $z = 2.0, 32.0$
- Electronics: DAE4 Sn852; Calibrated: 11/16/2011
- Phantom: SAM3; Type: SAM; Serial: TP-1597
- DASY52 52.8.0(692); SEMCAD X 14.6.4(4989)

Configuration/Body/Area Scan (8x11x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.769 mW/g

Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm


Reference Value = 26.290 V/m; Power Drift = -0.14 dB

Peak SAR (extrapolated) = 1.0100

SAR(1 g) = 0.745 mW/g; SAR(10 g) = 0.544 mW/g

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.784 mW/g

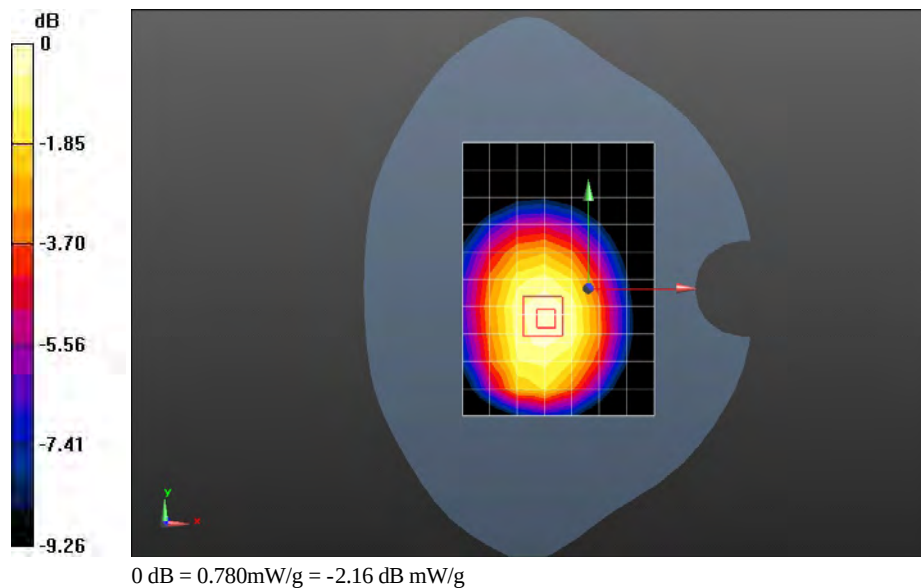

Test Laboratory: HUAWEI SAR Lab

U8665 GSM850 EGPRS 1TS 251CH Towards Ground 15mm

DUT: U8665; Type: HSDPA/UMTS/GPRS/GSM/EDGE Mobile Phone with Bluetooth;; Serial: SAR2

Communication System: HW-GSM\GPRS\EGPRS-1TS; Frequency: 848.8 MHz

Medium parameters used: $f = 849$ MHz; $\sigma = 0.999$ mho/m; $\epsilon_r = 54.153$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3578; ConvF(8.45, 8.45, 8.45); Calibrated: 6/21/2011
- Sensor-Surface: 4mm (Mechanical Surface Detection), $z = 2.0, 32.0$
- Electronics: DAE4 Sn852; Calibrated: 11/16/2011
- Phantom: SAM3; Type: SAM; Serial: TP-1597
- DASY52 52.8.0(692); SEMCAD X 14.6.4(4989)

Configuration/Body/Area Scan (8x11x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 0.744 mW/g


Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 25.426 V/m; Power Drift = 0.03 dB

Peak SAR (extrapolated) = 0.9440

SAR(1 g) = 0.712 mW/g; SAR(10 g) = 0.515 mW/g

Maximum value of SAR (measured) = 0.753 mW/g

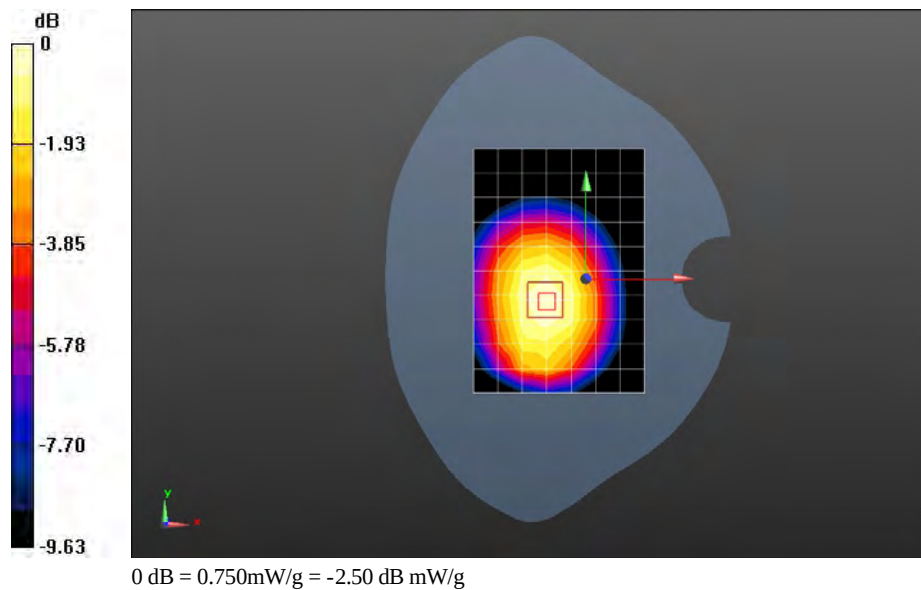

Test Laboratory: HUAWEI SAR Lab

U8665 GSM850 EGPRS 1TS 190CH Towards Ground 15mm

DUT: U8665; Type: HSDPA/UMTS/GPRS/GSM/EDGE Mobile Phone with Bluetooth;; Serial: SAR2

Communication System: HW-GSM\GPRS\EGPRS-1TS; Frequency: 836.6 MHz

Medium parameters used: $f = 837$ MHz; $\sigma = 0.988$ mho/m; $\epsilon_r = 54.27$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3578; ConvF(8.45, 8.45, 8.45); Calibrated: 6/21/2011
- Sensor-Surface: 4mm (Mechanical Surface Detection), $z = 2.0, 32.0$
- Electronics: DAE4 Sn852; Calibrated: 11/16/2011
- Phantom: SAM3; Type: SAM; Serial: TP-1597
- DASY52 52.8.0(692); SEMCAD X 14.6.4(4989)

Configuration/Body/Area Scan (8x11x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 0.847 mW/g


Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 27.184 V/m; Power Drift = 0.09 dB

Peak SAR (extrapolated) = 1.0880

SAR(1 g) = 0.822 mW/g; SAR(10 g) = 0.597 mW/g

Maximum value of SAR (measured) = 0.873 mW/g

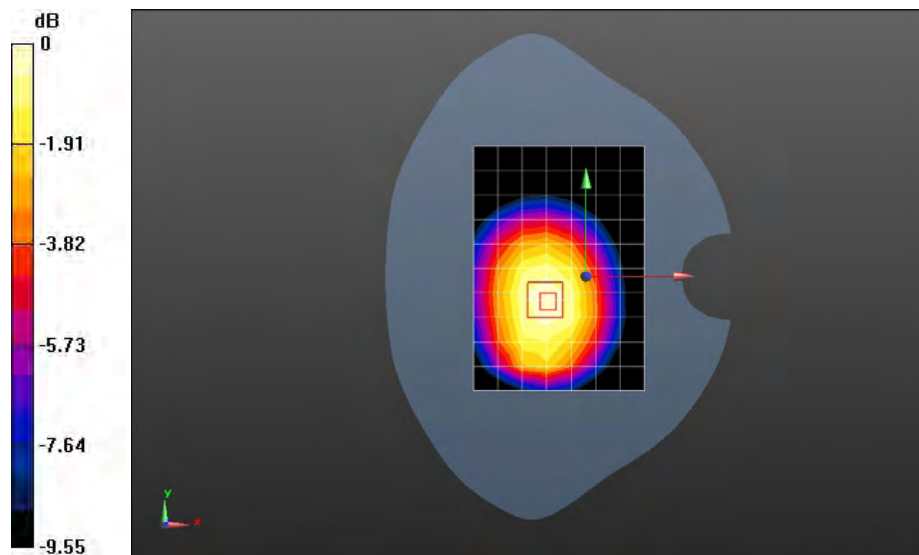

0 dB = 0.870mW/g = -1.21 dB mW/g

Test Laboratory: HUAWEI SAR Lab

U8665 GSM850 EGPRS 1TS 128CH Towards Ground 15mm

DUT: U8665; Type: HSDPA/UMTS/GPRS/GSM/EDGE Mobile Phone with Bluetooth;; Serial: SAR2

Communication System: HW-GSM\GPRS\EGPRS-1TS; Frequency: 824.2 MHz

Medium parameters used (interpolated): $f = 824.2$ MHz; $\sigma = 0.974$ mho/m; $\epsilon_r = 54.421$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3578; ConvF(8.45, 8.45, 8.45); Calibrated: 6/21/2011
- Sensor-Surface: 4mm (Mechanical Surface Detection), $z = 2.0, 32.0$
- Electronics: DAE4 Sn852; Calibrated: 11/16/2011
- Phantom: SAM3; Type: SAM; Serial: TP-1597
- DASY52 52.8.0(692); SEMCAD X 14.6.4(4989)

Configuration/Body/Area Scan (8x11x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.726 mW/g

Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm


Reference Value = 25.634 V/m; Power Drift = -0.05 dB

Peak SAR (extrapolated) = 0.9460

SAR(1 g) = 0.692 mW/g; SAR(10 g) = 0.502 mW/g

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.730 mW/g

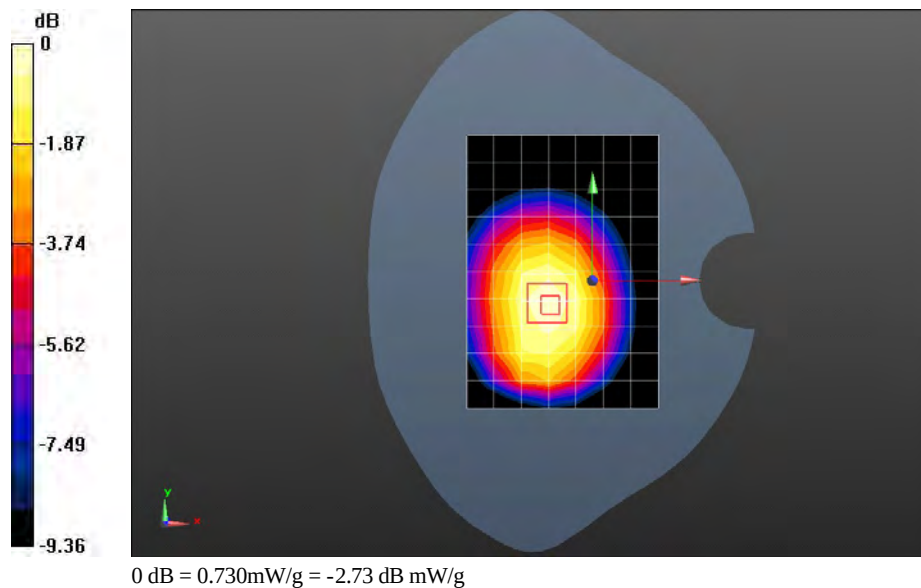

Test Laboratory: HUAWEI SAR Lab

U8665 GSM850 EGPRS 2TS 251CH Towards Ground 15mm

DUT: U8665; Type: HSDPA/UMTS/GPRS/GSM/EDGE Mobile Phone with Bluetooth;; Serial: SAR2

Communication System: HW-GSM\GPRS\EGPRS-2TS; Frequency: 848.8 MHz

Medium parameters used: $f = 849$ MHz; $\sigma = 0.999$ mho/m; $\epsilon_r = 54.153$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3578; ConvF(8.45, 8.45, 8.45); Calibrated: 6/21/2011
- Sensor-Surface: 4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE4 Sn852; Calibrated: 11/16/2011
- Phantom: SAM3; Type: SAM; Serial: TP-1597
- DASY52 52.8.0(692); SEMCAD X 14.6.4(4989)

Configuration/Body/Area Scan (8x11x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 0.769 mW/g


Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 26.306 V/m; Power Drift = 0.04 dB

Peak SAR (extrapolated) = 1.0080

SAR(1 g) = 0.761 mW/g; SAR(10 g) = 0.555 mW/g

Maximum value of SAR (measured) = 0.803 mW/g

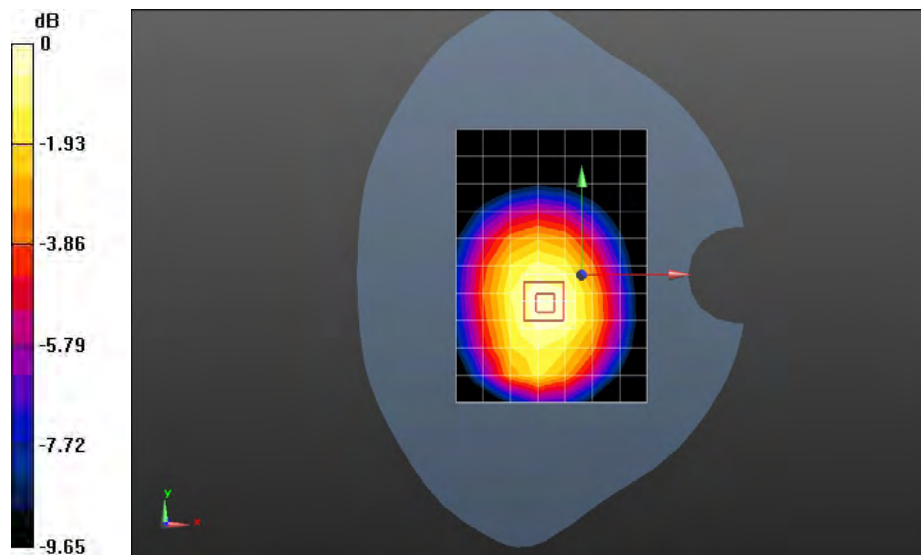

0 dB = 0.800mW/g = -1.94 dB mW/g

Test Laboratory: HUAWEI SAR Lab

U8665 GSM850 EGPRS 2TS 190CH Towards Ground 15mm

DUT: U8665; Type: HSDPA/UMTS/GPRS/GSM/EDGE Mobile Phone with Bluetooth;; Serial: SAR2

Communication System: HW-GSM\GPRS\EGPRS-2TS; Frequency: 836.6 MHz

Medium parameters used: $f = 837$ MHz; $\sigma = 0.988$ mho/m; $\epsilon_r = 54.27$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3578; ConvF(8.45, 8.45, 8.45); Calibrated: 6/21/2011
- Sensor-Surface: 4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE4 Sn852; Calibrated: 11/16/2011
- Phantom: SAM3; Type: SAM; Serial: TP-1597
- DASY52 52.8.0(692); SEMCAD X 14.6.4(4989)

Configuration/Body/Area Scan (8x11x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 0.887 mW/g


Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 28.553 V/m; Power Drift = -0.16 dB

Peak SAR (extrapolated) = 1.1440

SAR(1 g) = 0.868 mW/g; SAR(10 g) = 0.633 mW/g

Maximum value of SAR (measured) = 0.916 mW/g

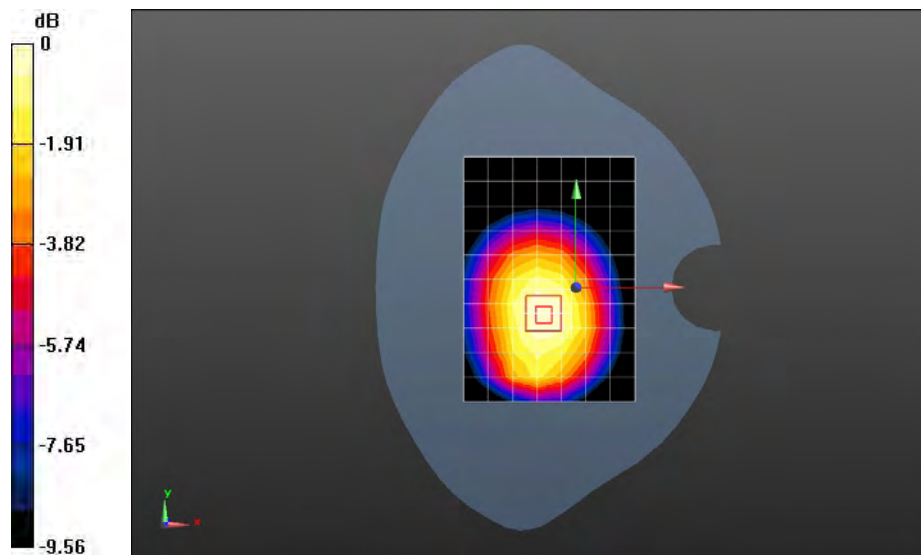

0 dB = 0.920mW/g = -0.72 dB mW/g

Test Laboratory: HUAWEI SAR Lab

U8665 GSM850 EGPRS 2TS 128CH Towards Ground 15mm

DUT: U8665; Type: HSDPA/UMTS/GPRS/GSM/EDGE Mobile Phone with Bluetooth;; Serial: SAR2

Communication System: HW-GSM\GPRS\EGPRS-2TS; Frequency: 824.2 MHz

Medium parameters used (interpolated): $f = 824.2$ MHz; $\sigma = 0.974$ mho/m; $\epsilon_r = 54.421$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3578; ConvF(8.45, 8.45, 8.45); Calibrated: 6/21/2011
- Sensor-Surface: 4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE4 Sn852; Calibrated: 11/16/2011
- Phantom: SAM3; Type: SAM; Serial: TP-1597
- DASY52 52.8.0(692); SEMCAD X 14.6.4(4989)

Configuration/Body/Area Scan (8x11x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.751 mW/g

Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm


Reference Value = 26.048 V/m; Power Drift = -0.0065 dB

Peak SAR (extrapolated) = 0.9670

SAR(1 g) = 0.743 mW/g; SAR(10 g) = 0.544 mW/g

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.780 mW/g

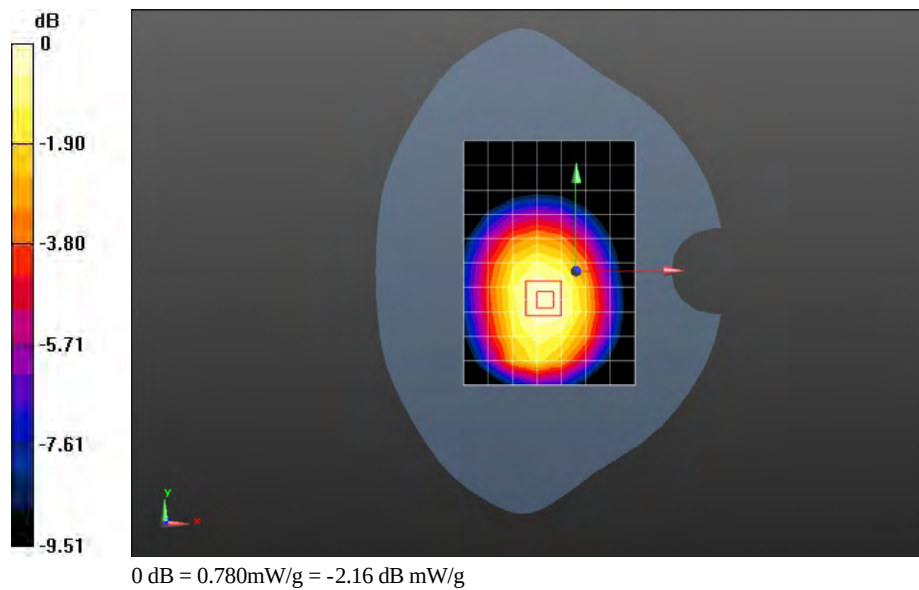

Test Laboratory: HUAWEI SAR Lab

U8665 GSM850 190CH Towards Ground 15mm with headset

DUT: U8665; Type: HSDPA/UMTS/GPRS/GSM/EDGE Mobile Phone with Bluetooth;; Serial: SAR2

Communication System: HW-GSM\GPRS\EGPRS-1TS; Frequency: 836.6 MHz

Medium parameters used: $f = 837$ MHz; $\sigma = 0.988$ mho/m; $\epsilon_r = 54.27$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3578; ConvF(8.45, 8.45, 8.45); Calibrated: 6/21/2011
- Sensor-Surface: 4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE4 Sn852; Calibrated: 11/16/2011
- Phantom: SAM3; Type: SAM; Serial: TP-1597
- DASY52 52.8.0(692); SEMCAD X 14.6.4(4989)

Configuration/Body/Area Scan (8x11x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 0.556 mW/g


Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 21.968 V/m; Power Drift = 0.04 dB

Peak SAR (extrapolated) = 0.7540

SAR(1 g) = 0.510 mW/g; SAR(10 g) = 0.347 mW/g

Maximum value of SAR (measured) = 0.550 mW/g

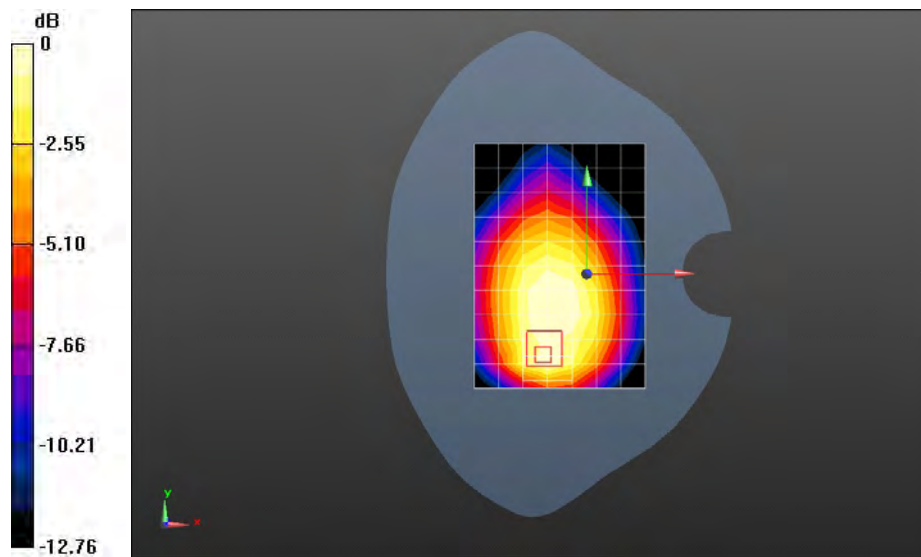

0 dB = 0.550mW/g = -5.19 dB mW/g

Test Laboratory: HUAWEI SAR Lab

U8665 GSM850 EGPRS 2TS 190CH Towards Ground 15mm with battery SN-UAIBC20X03007197

DUT: U8665; Type: HSDPA/UMTS/GPRS/GSM/EDGE Mobile Phone with Bluetooth;; Serial: SAR2

Communication System: HW-GSM\GPRS\EGPRS-2TS; Frequency: 836.6 MHz

Medium parameters used: $f = 837$ MHz; $\sigma = 0.988$ mho/m; $\epsilon_r = 54.27$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3578; ConvF(8.45, 8.45, 8.45); Calibrated: 6/21/2011
- Sensor-Surface: 4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE4 Sn852; Calibrated: 11/16/2011
- Phantom: SAM3; Type: SAM; Serial: TP-1597
- DASY52 52.8.0(692); SEMCAD X 14.6.4(4989)

Configuration/Body/Area Scan (8x11x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 0.899 mW/g


Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 28.720 V/m; Power Drift = -0.09 dB

Peak SAR (extrapolated) = 1.1260

SAR(1 g) = 0.864 mW/g; SAR(10 g) = 0.632 mW/g

Maximum value of SAR (measured) = 0.910 mW/g

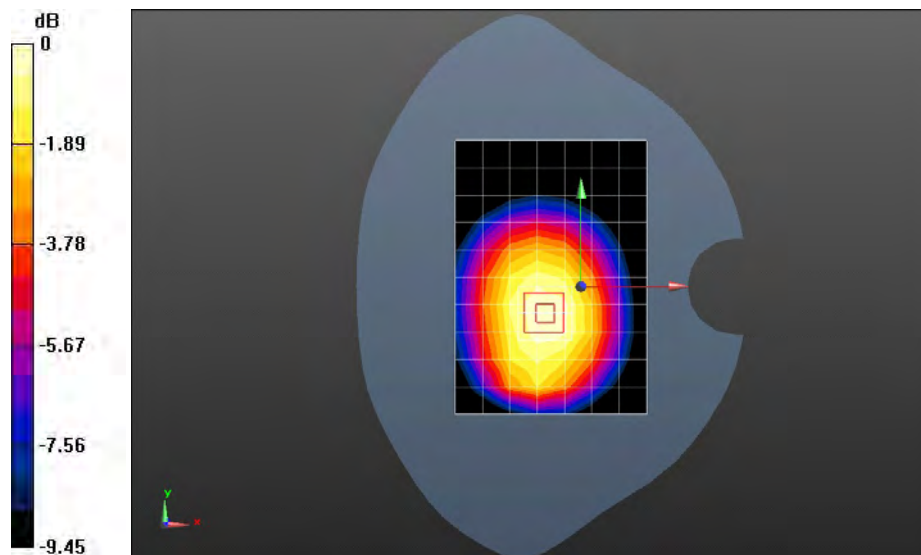

0 dB = 0.910mW/g = -0.82 dB mW/g

Test Laboratory: HUAWEI SAR Lab

U8665 GSM850 EGPRS 2TS 190CH Towards Ground 15mm with battery SN-UNDC306X03000317

DUT: U8665; Type: HSDPA/UMTS/GPRS/GSM/EDGE Mobile Phone with Bluetooth;; Serial: SAR2

Communication System: HW-GSM\GPRS\EGPRS-2TS; Frequency: 836.6 MHz

Medium parameters used: $f = 837$ MHz; $\sigma = 0.988$ mho/m; $\epsilon_r = 54.27$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3578; ConvF(8.45, 8.45, 8.45); Calibrated: 6/21/2011
- Sensor-Surface: 4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE4 Sn852; Calibrated: 11/16/2011
- Phantom: SAM3; Type: SAM; Serial: TP-1597
- DASY52 52.8.0(692); SEMCAD X 14.6.4(4989)

Configuration/Body/Area Scan (8x11x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 0.899 mW/g


Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 28.958 V/m; Power Drift = -0.11 dB

Peak SAR (extrapolated) = 1.1380

SAR(1 g) = 0.868 mW/g; SAR(10 g) = 0.634 mW/g

Maximum value of SAR (measured) = 0.911 mW/g

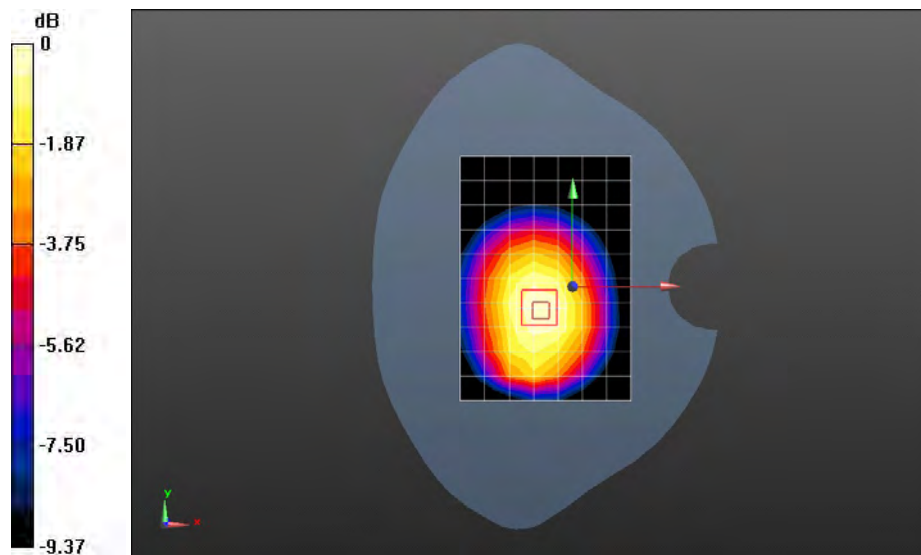

0 dB = 0.910mW/g = -0.82 dB mW/g

Test Laboratory: HUAWEI SAR Lab

U8665 GSM850 EGPRS 2TS 190CH Towards Ground 15mm with battery SN-MHCBB066I44E1903

DUT: U8665; Type: HSDPA/UMTS/GPRS/GSM/EDGE Mobile Phone with Bluetooth;; Serial: SAR2

Communication System: HW-GSM\GPRS\EGPRS-2TS; Frequency: 836.6 MHz

Medium parameters used: $f = 837$ MHz; $\sigma = 0.988$ mho/m; $\epsilon_r = 54.27$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3578; ConvF(8.45, 8.45, 8.45); Calibrated: 6/21/2011
- Sensor-Surface: 4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE4 Sn852; Calibrated: 11/16/2011
- Phantom: SAM3; Type: SAM; Serial: TP-1597
- DASY52 52.8.0(692); SEMCAD X 14.6.4(4989)

Configuration/Body/Area Scan (8x11x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 0.891 mW/g


Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 28.571 V/m; Power Drift = -0.17 dB

Peak SAR (extrapolated) = 1.1220

SAR(1 g) = 0.859 mW/g; SAR(10 g) = 0.628 mW/g

Maximum value of SAR (measured) = 0.903 mW/g

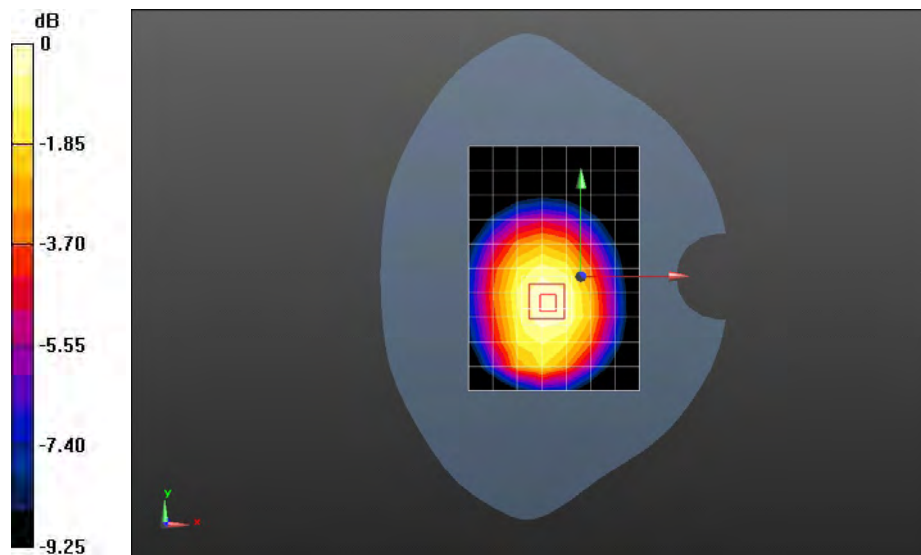

0 dB = 0.900mW/g = -0.92 dB mW/g

Test Laboratory: HUAWEI SAR Lab

U8665 GSM1900 661CH Left hand touch cheek

DUT: U8665; Type: HSDPA/UMTS/GPRS/GSM/EDGE Mobile Phone with Bluetooth;; Serial: SAR2

Communication System: HW-GSM\GPRS\EGPRS-1TS; Frequency: 1880 MHz

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.415$ mho/m; $\epsilon_r = 39.425$; $\rho = 1000$ kg/m³

Phantom section: Left Section

DASY Configuration:

- Probe: EX3DV4 - SN3578; ConvF(7.26, 7.26, 7.26); Calibrated: 6/21/2011
- Sensor-Surface: 4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE4 Sn852; Calibrated: 11/16/2011
- Phantom: SAM3; Type: SAM; Serial: TP-1597
- DASY52 52.8.0(692); SEMCAD X 14.6.4(4989)

Configuration/Head/Area Scan (8x12x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 0.529 mW/g


Configuration/Head/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 9.902 V/m; Power Drift = 0.07 dB

Peak SAR (extrapolated) = 0.9450

SAR(1 g) = 0.547 mW/g; SAR(10 g) = 0.321 mW/g

Maximum value of SAR (measured) = 0.603 mW/g

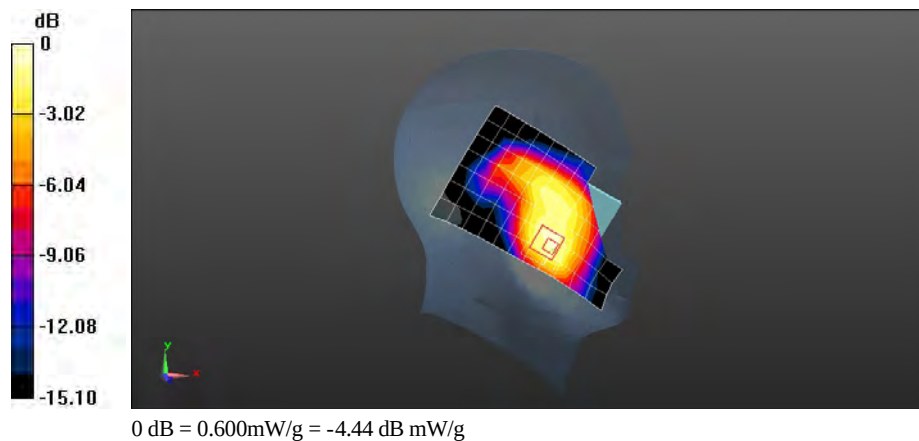

Test Laboratory: HUAWEI SAR Lab

U8665 GSM1900 661CH Left hand tilt 15 degree

DUT: U8665; Type: HSDPA/UMTS/GPRS/GSM/EDGE Mobile Phone with Bluetooth;; Serial: SAR2

Communication System: HW-GSM\GPRS\EGPRS-1TS; Frequency: 1880 MHz

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.415$ mho/m; $\epsilon_r = 39.425$; $\rho = 1000$ kg/m³

Phantom section: Left Section

DASY Configuration:

- Probe: EX3DV4 - SN3578; ConvF(7.26, 7.26, 7.26); Calibrated: 6/21/2011
- Sensor-Surface: 4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE4 Sn852; Calibrated: 11/16/2011
- Phantom: SAM3; Type: SAM; Serial: TP-1597
- DASY52 52.8.0(692); SEMCAD X 14.6.4(4989)

Configuration/Head/Area Scan (8x12x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 0.288 mW/g


Configuration/Head/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 13.808 V/m; Power Drift = 0.03 dB

Peak SAR (extrapolated) = 0.4020

SAR(1 g) = 0.266 mW/g; SAR(10 g) = 0.161 mW/g

Maximum value of SAR (measured) = 0.286 mW/g

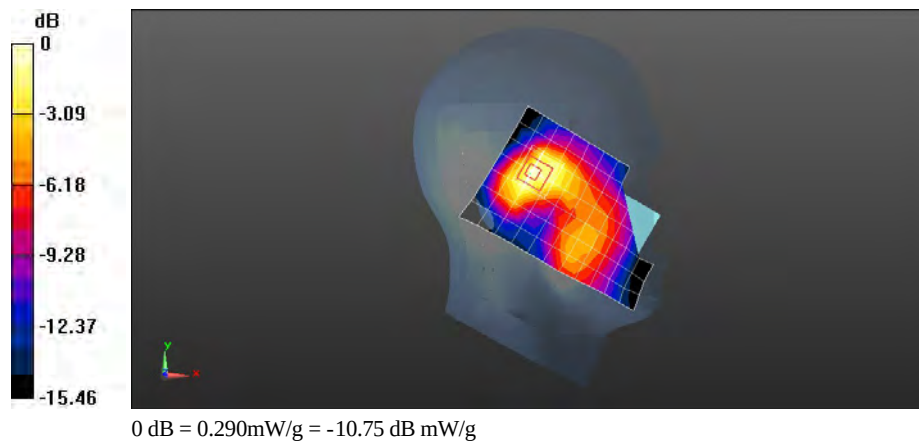

Test Laboratory: HUAWEI SAR Lab

U8665 GSM1900 661CH Right hand touch cheek

DUT: U8665; Type: HSDPA/UMTS/GPRS/GSM/EDGE Mobile Phone with Bluetooth;; Serial: SAR2

Communication System: HW-GSM\GPRS\EGPRS-1TS; Frequency: 1880 MHz

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.415$ mho/m; $\epsilon_r = 39.425$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY Configuration:

- Probe: EX3DV4 - SN3578; ConvF(7.26, 7.26, 7.26); Calibrated: 6/21/2011
- Sensor-Surface: 4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE4 Sn852; Calibrated: 11/16/2011
- Phantom: SAM3; Type: SAM; Serial: TP-1597
- DASY52 52.8.0(692); SEMCAD X 14.6.4(4989)

Configuration/Head/Area Scan (8x12x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 0.652 mW/g


Configuration/Head/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 8.653 V/m; Power Drift = 0.11 dB

Peak SAR (extrapolated) = 0.9330

SAR(1 g) = 0.615 mW/g; SAR(10 g) = 0.389 mW/g

Maximum value of SAR (measured) = 0.660 mW/g

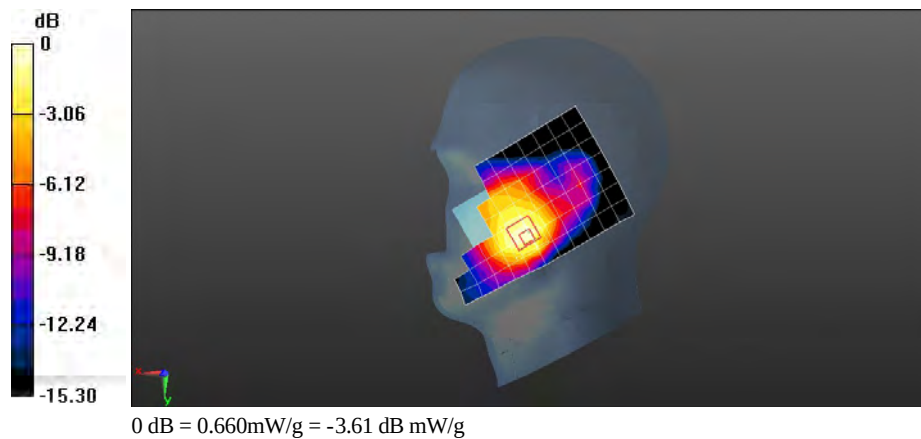

Test Laboratory: HUAWEI SAR Lab

U8665 GSM1900 661CH Right hand tilt 15 degree

DUT: U8665; Type: HSDPA/UMTS/GPRS/GSM/EDGE Mobile Phone with Bluetooth;; Serial: SAR2

Communication System: HW-GSM\GPRS\EGPRS-1TS; Frequency: 1880 MHz

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.415$ mho/m; $\epsilon_r = 39.425$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY Configuration:

- Probe: EX3DV4 - SN3578; ConvF(7.26, 7.26, 7.26); Calibrated: 6/21/2011
- Sensor-Surface: 4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE4 Sn852; Calibrated: 11/16/2011
- Phantom: SAM3; Type: SAM; Serial: TP-1597
- DASY52 52.8.0(692); SEMCAD X 14.6.4(4989)

Configuration/Head/Area Scan (8x12x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 0.247 mW/g


Configuration/Head/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 12.802 V/m; Power Drift = -0.06 dB

Peak SAR (extrapolated) = 0.4240

SAR(1 g) = 0.256 mW/g; SAR(10 g) = 0.144 mW/g

Maximum value of SAR (measured) = 0.283 mW/g

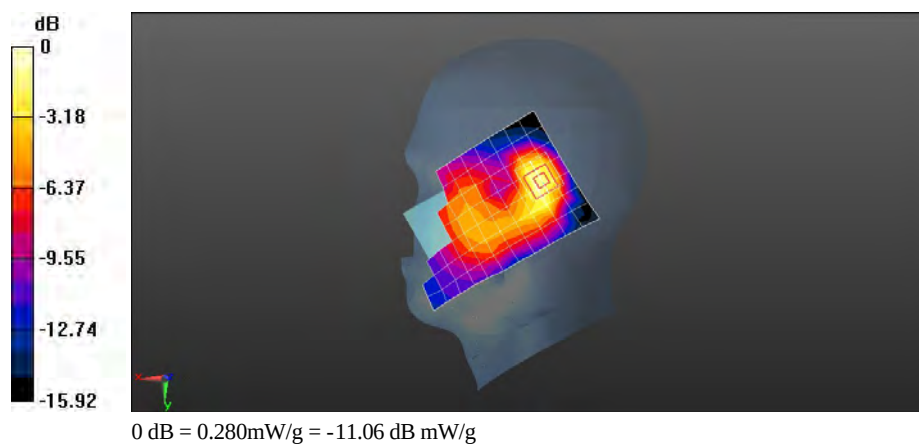

Test Laboratory: HUAWEI SAR Lab

U8665 GSM1900 661CH Right hand touch cheek with battery SN-UAIBC20X03007197

DUT: U8665; Type: HSDPA/UMTS/GPRS/GSM/EDGE Mobile Phone with Bluetooth;; Serial: SAR2

Communication System: HW-GSM\GPRS\EGPRS-1TS; Frequency: 1880 MHz

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.415$ mho/m; $\epsilon_r = 39.425$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY Configuration:

- Probe: EX3DV4 - SN3578; ConvF(7.26, 7.26, 7.26); Calibrated: 6/21/2011
- Sensor-Surface: 4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE4 Sn852; Calibrated: 11/16/2011
- Phantom: SAM3; Type: SAM; Serial: TP-1597
- DASY52 52.8.0(692); SEMCAD X 14.6.4(4989)

Configuration/Head/Area Scan (8x12x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 0.681 mW/g


Configuration/Head/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 8.786 V/m; Power Drift = 0.10 dB

Peak SAR (extrapolated) = 0.9750

SAR(1 g) = 0.626 mW/g; SAR(10 g) = 0.392 mW/g

Maximum value of SAR (measured) = 0.664 mW/g

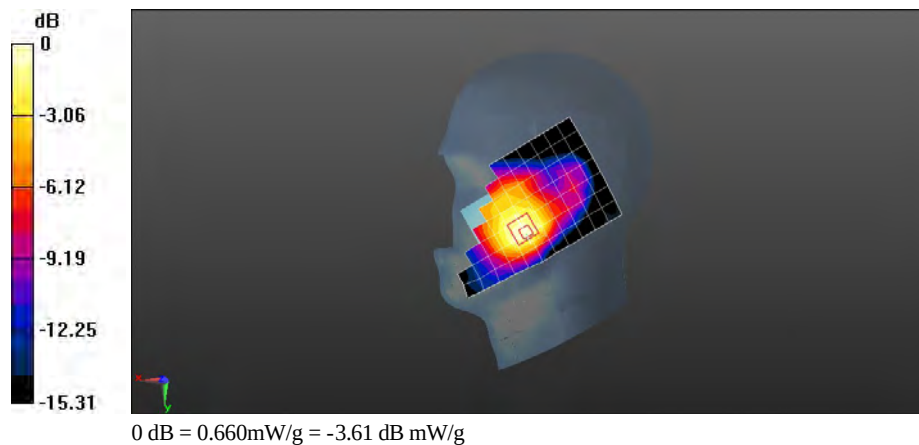

Test Laboratory: HUAWEI SAR Lab

U8665 GSM1900 661CH Right hand touch cheek with battery SN-UNDC306X03000317

DUT: U8665; Type: HSDPA/UMTS/GPRS/GSM/EDGE Mobile Phone with Bluetooth;; Serial: SAR2

Communication System: HW-GSM\GPRS\EGPRS-1TS; Frequency: 1880 MHz

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.415$ mho/m; $\epsilon_r = 39.425$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY Configuration:

- Probe: EX3DV4 - SN3578; ConvF(7.26, 7.26, 7.26); Calibrated: 6/21/2011
- Sensor-Surface: 4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE4 Sn852; Calibrated: 11/16/2011
- Phantom: SAM3; Type: SAM; Serial: TP-1597
- DASY52 52.8.0(692); SEMCAD X 14.6.4(4989)

Configuration/Head/Area Scan (8x12x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 0.694 mW/g



Configuration/Head/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 8.620 V/m; Power Drift = 0.12 dB

Peak SAR (extrapolated) = 0.9870

SAR(1 g) = 0.628 mW/g; SAR(10 g) = 0.385 mW/g

Maximum value of SAR (measured) = 0.674 mW/g

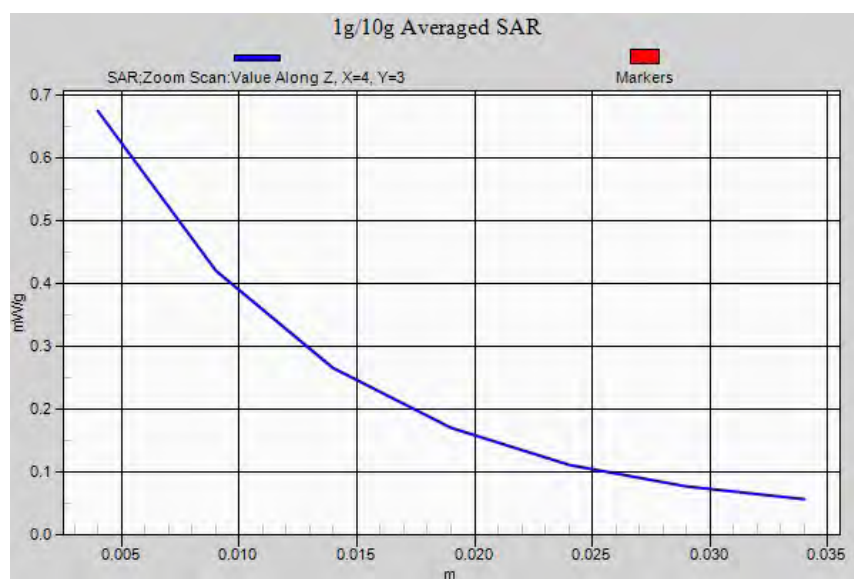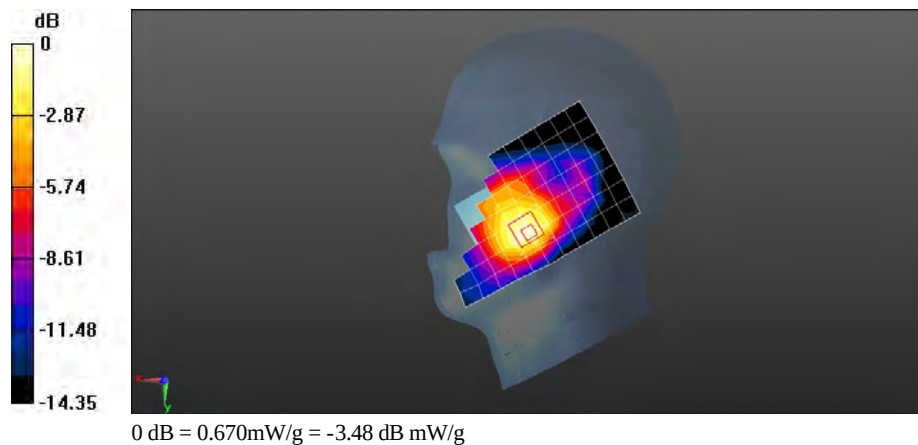

Test Laboratory: HUAWEI SAR Lab

U8665 GSM1900 661CH Right hand touch cheek with battery SN-MHCBB066I44E1903

DUT: U8665; Type: HSDPA/UMTS/GPRS/GSM/EDGE Mobile Phone with Bluetooth;; Serial: SAR2

Communication System: HW-GSM\GPRS\EGPRS-1TS; Frequency: 1880 MHz

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.415$ mho/m; $\epsilon_r = 39.425$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY Configuration:

- Probe: EX3DV4 - SN3578; ConvF(7.26, 7.26, 7.26); Calibrated: 6/21/2011
- Sensor-Surface: 4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE4 Sn852; Calibrated: 11/16/2011
- Phantom: SAM3; Type: SAM; Serial: TP-1597
- DASY52 52.8.0(692); SEMCAD X 14.6.4(4989)

Configuration/Head/Area Scan (8x12x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 0.679 mW/g


Configuration/Head/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 8.465 V/m; Power Drift = 0.13 dB

Peak SAR (extrapolated) = 0.9890

SAR(1 g) = 0.619 mW/g; SAR(10 g) = 0.378 mW/g

Maximum value of SAR (measured) = 0.681 mW/g

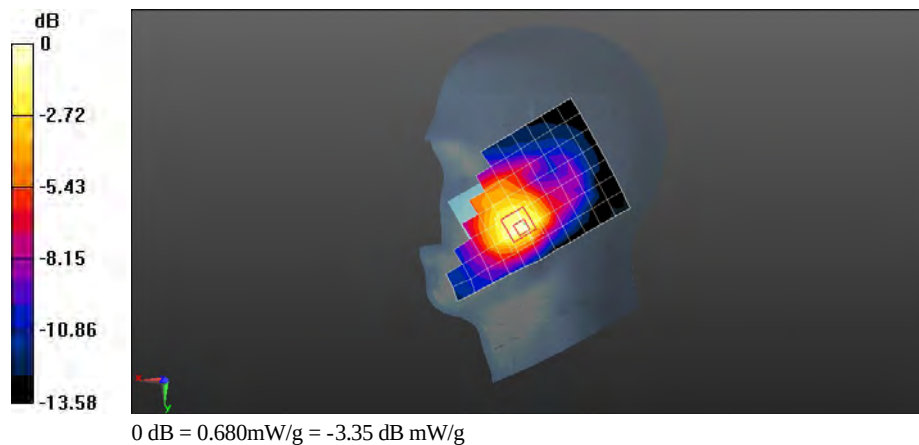

Test Laboratory: HUAWEI SAR Lab

U8665 GSM1900 GPRS 1TS 661CH Toward Phantom 10mm

DUT: U8665; Type: HSDPA/UMTS/GPRS/GSM/EDGE Mobile Phone with Bluetooth;; Serial: SAR2

Communication System: HW-GSM\GPRS\EGPRS-1TS; Frequency: 1880 MHz

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.516$ mho/m; $\epsilon_r = 53.356$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3578; ConvF(6.68, 6.68, 6.68); Calibrated: 6/21/2011
- Sensor-Surface: 4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE4 Sn852; Calibrated: 11/16/2011
- Phantom: SAM4; Type: SAM; Serial: TP-1620
- DASY52 52.8.0(692); SEMCAD X 14.6.4(4989)

Configuration/Body/Area Scan (8x12x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 0.551 mW/g


Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 8.154 V/m; Power Drift = -0.18 dB

Peak SAR (extrapolated) = 0.9240

SAR(1 g) = 0.542 mW/g; SAR(10 g) = 0.329 mW/g

Maximum value of SAR (measured) = 0.584 mW/g

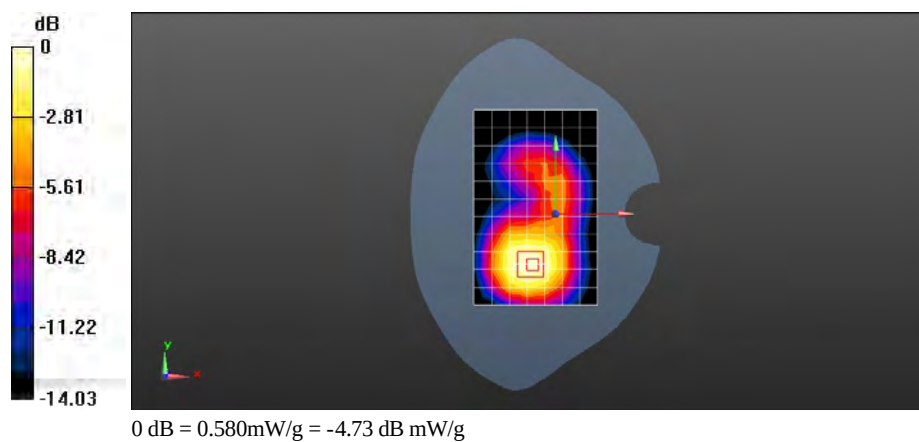

Test Laboratory: HUAWEI SAR Lab

U8665 GSM1900 GPRS 2TS 661CH Toward Phantom 10mm

DUT: U8665; Type: HSDPA/UMTS/GPRS/GSM/EDGE Mobile Phone with Bluetooth;; Serial: SAR2

Communication System: HW-GSM\GPRS\EGPRS-2TS; Frequency: 1880 MHz

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.516$ mho/m; $\epsilon_r = 53.356$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3578; ConvF(6.68, 6.68, 6.68); Calibrated: 6/21/2011
- Sensor-Surface: 4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE4 Sn852; Calibrated: 11/16/2011
- Phantom: SAM4; Type: SAM; Serial: TP-1620
- DASY52 52.8.0(692); SEMCAD X 14.6.4(4989)

Configuration/Body/Area Scan (8x12x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 0.592 mW/g


Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 8.482 V/m; Power Drift = 0.04 dB

Peak SAR (extrapolated) = 0.9880

SAR(1 g) = 0.590 mW/g; SAR(10 g) = 0.357 mW/g

Maximum value of SAR (measured) = 0.635 mW/g

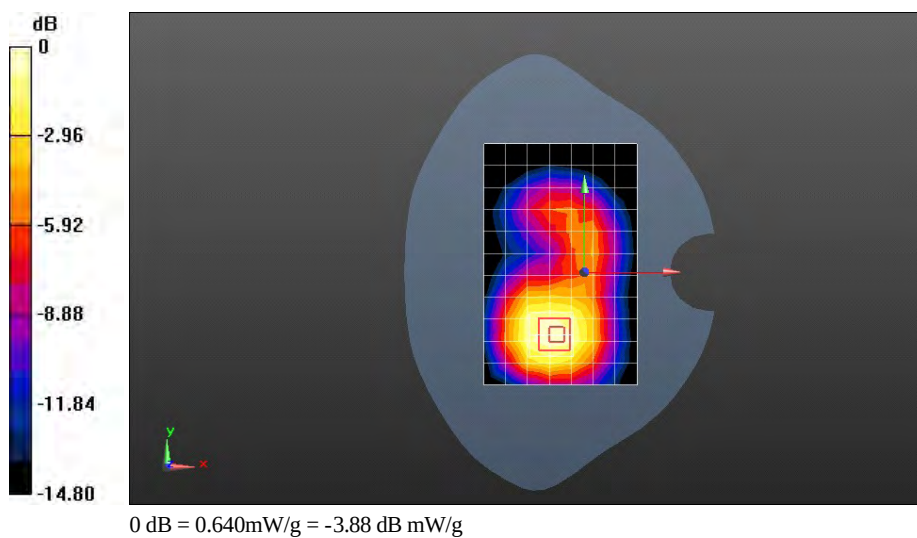

Test Laboratory: HUAWEI SAR Lab

U8665 GSM1900 GPRS 2TS 661CH Towards Ground 10mm

DUT: U8665; Type: HSDPA/UMTS/GPRS/GSM/EDGE Mobile Phone with Bluetooth;; Serial: SAR2

Communication System: HW-GSM\GPRS\EGPRS-2TS; Frequency: 1880 MHz

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.516$ mho/m; $\epsilon_r = 53.356$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3578; ConvF(6.68, 6.68, 6.68); Calibrated: 6/21/2011
- Sensor-Surface: 4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE4 Sn852; Calibrated: 11/16/2011
- Phantom: SAM4; Type: SAM; Serial: TP-1620
- DASY52 52.8.0(692); SEMCAD X 14.6.4(4989)

Configuration/Body/Area Scan (8x12x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 0.776 mW/g


Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 7.440 V/m; Power Drift = 0.0025 dB

Peak SAR (extrapolated) = 1.3370

SAR(1 g) = 0.770 mW/g; SAR(10 g) = 0.423 mW/g

Maximum value of SAR (measured) = 0.848 mW/g

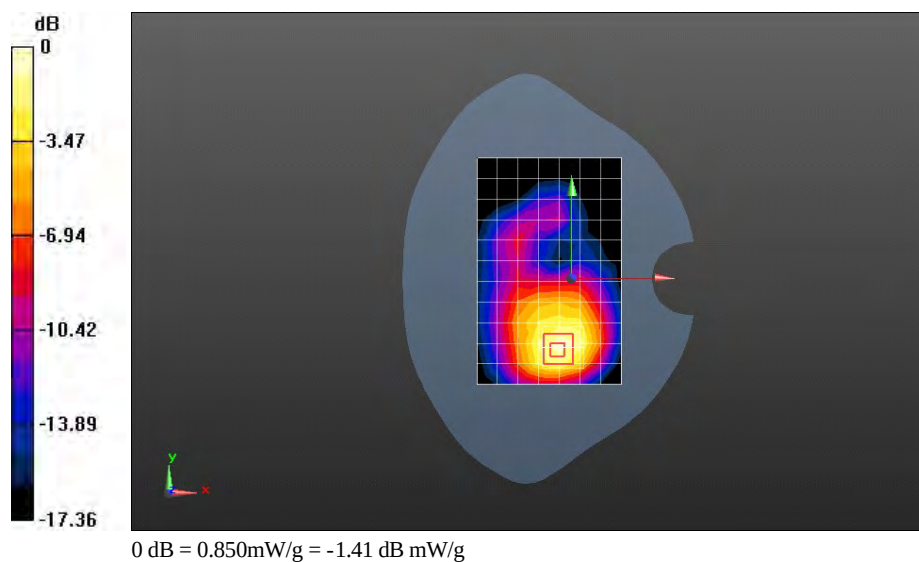

Test Laboratory: HUAWEI SAR Lab

U8665 GSM1900 GPRS 2TS 661CH Left edge 10mm

DUT: U8665; Type: HSDPA/UMTS/GPRS/GSM/EDGE Mobile Phone with Bluetooth;; Serial: SAR2

Communication System: HW-GSM\GPRS\EGPRS-2TS; Frequency: 1880 MHz

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.516$ mho/m; $\epsilon_r = 53.356$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3578; ConvF(6.68, 6.68, 6.68); Calibrated: 6/21/2011
- Sensor-Surface: 4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE4 Sn852; Calibrated: 11/16/2011
- Phantom: SAM4; Type: SAM; Serial: TP-1620
- DASY52 52.8.0(692); SEMCAD X 14.6.4(4989)

Configuration/Body/Area Scan (8x12x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 0.330 mW/g


Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 10.124 V/m; Power Drift = 0.02 dB

Peak SAR (extrapolated) = 0.5540

SAR(1 g) = 0.312 mW/g; SAR(10 g) = 0.169 mW/g

Maximum value of SAR (measured) = 0.346 mW/g

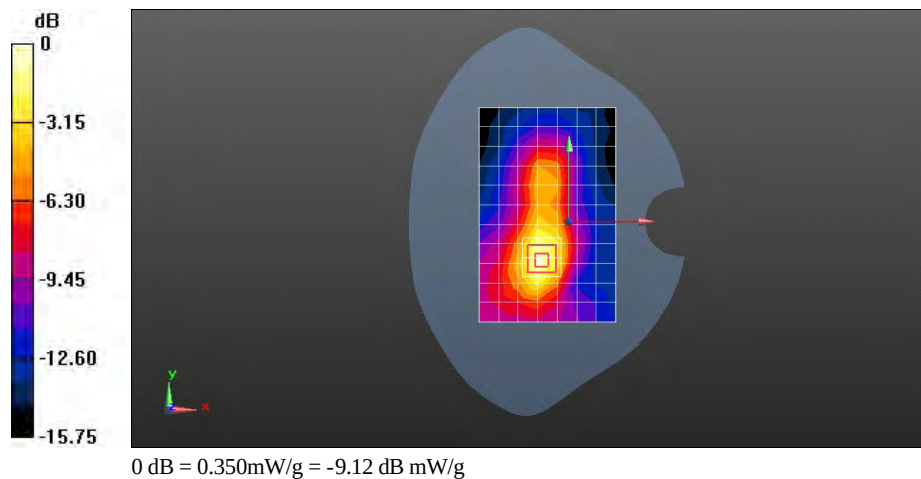

Test Laboratory: HUAWEI SAR Lab

U8665 GSM1900 GPRS 2TS 661CH Right edge 10mm

DUT: U8665; Type: HSDPA/UMTS/GPRS/GSM/EDGE Mobile Phone with Bluetooth;; Serial: SAR2

Communication System: HW-GSM\GPRS\EGPRS-2TS; Frequency: 1880 MHz

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.516$ mho/m; $\epsilon_r = 53.356$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3578; ConvF(6.68, 6.68, 6.68); Calibrated: 6/21/2011
- Sensor-Surface: 4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE4 Sn852; Calibrated: 11/16/2011
- Phantom: SAM4; Type: SAM; Serial: TP-1620
- DASY52 52.8.0(692); SEMCAD X 14.6.4(4989)

Configuration/Body/Area Scan (8x12x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 0.181 mW/g


Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 6.934 V/m; Power Drift = 0.11 dB

Peak SAR (extrapolated) = 0.2850

SAR(1 g) = 0.169 mW/g; SAR(10 g) = 0.096 mW/g

Maximum value of SAR (measured) = 0.186 mW/g

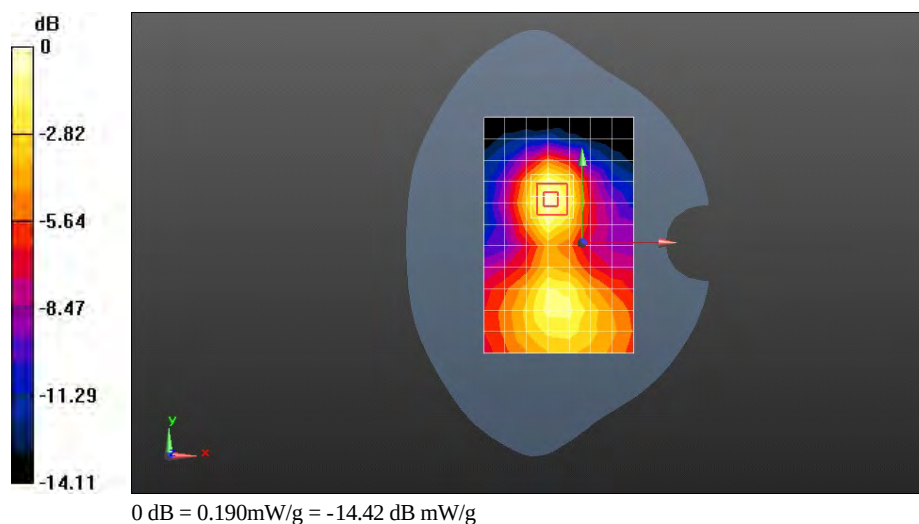

Test Laboratory: HUAWEI SAR Lab

U8665 GSM1900 GPRS 2TS 661CH Bottom edge 10mm

DUT: U8665; Type: HSDPA/UMTS/GPRS/GSM/EDGE Mobile Phone with Bluetooth;; Serial: SAR2

Communication System: HW-GSM\GPRS\EGPRS-2TS; Frequency: 1880 MHz

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.516$ mho/m; $\epsilon_r = 53.356$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3578; ConvF(6.68, 6.68, 6.68); Calibrated: 6/21/2011
- Sensor-Surface: 4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE4 Sn852; Calibrated: 11/16/2011
- Phantom: SAM4; Type: SAM; Serial: TP-1620
- DASY52 52.8.0(692); SEMCAD X 14.6.4(4989)

Configuration/Body/Area Scan (8x12x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 0.640 mW/g


Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 19.101 V/m; Power Drift = 0.09 dB

Peak SAR (extrapolated) = 1.1110

SAR(1 g) = 0.641 mW/g; SAR(10 g) = 0.351 mW/g

Maximum value of SAR (measured) = 0.711 mW/g

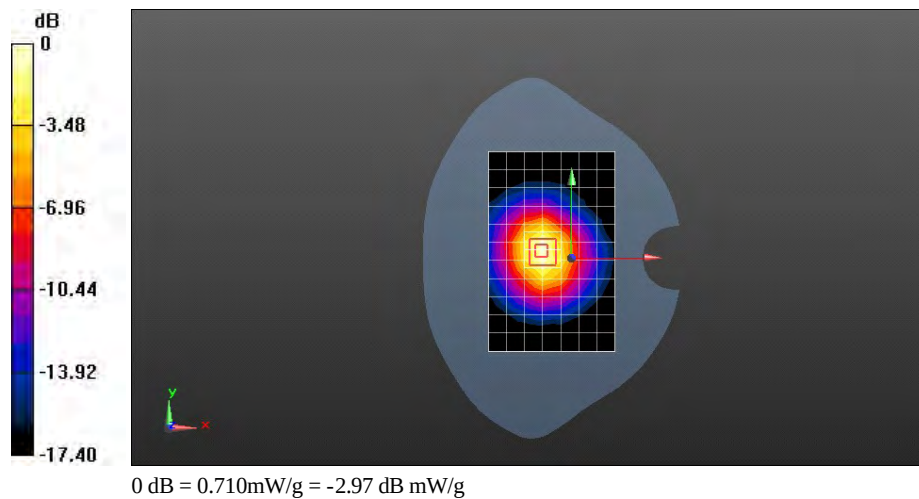

Test Laboratory: HUAWEI SAR Lab

U8665 GSM1900 EGPRS 1TS 661CH Towards Ground 10mm

DUT: U8665; Type: HSDPA/UMTS/GPRS/GSM/EDGE Mobile Phone with Bluetooth;; Serial: SAR2

Communication System: HW-GSM\GPRS\EGPRS-1TS; Frequency: 1880 MHz

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.516$ mho/m; $\epsilon_r = 53.356$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3578; ConvF(6.68, 6.68, 6.68); Calibrated: 6/21/2011
- Sensor-Surface: 4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE4 Sn852; Calibrated: 11/16/2011
- Phantom: SAM4; Type: SAM; Serial: TP-1620
- DASY52 52.8.0(692); SEMCAD X 14.6.4(4989)

Configuration/Body/Area Scan (8x12x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 0.646 mW/g


Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 11.129 V/m; Power Drift = -0.13 dB

Peak SAR (extrapolated) = 1.2540

SAR(1 g) = 0.721 mW/g; SAR(10 g) = 0.401 mW/g

Maximum value of SAR (measured) = 0.801 mW/g

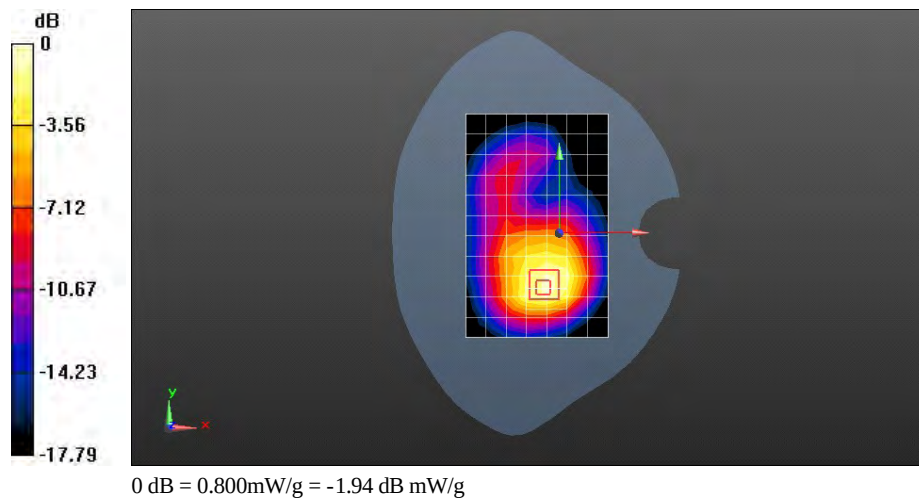

Test Laboratory: HUAWEI SAR Lab

U8665 GSM1900 EGPRS 2TS 661CH Towards Ground 10mm**DUT: U8665; Type: HSDPA/UMTS/GPRS/GSM/EDGE Mobile Phone with Bluetooth;; Serial: SAR2**

Communication System: HW-GSM\GPRS\EGPRS-2TS; Frequency: 1880 MHz

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.516$ mho/m; $\epsilon_r = 53.356$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3578; ConvF(6.68, 6.68, 6.68); Calibrated: 6/21/2011
- Sensor-Surface: 4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE4 Sn852; Calibrated: 11/16/2011
- Phantom: SAM4; Type: SAM; Serial: TP-1620
- DASY52 52.8.0(692); SEMCAD X 14.6.4(4989)

Configuration/Body/Area Scan (8x12x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 0.705 mW/g



Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 11.453 V/m; Power Drift = 0.13 dB

Peak SAR (extrapolated) = 1.3320

SAR(1 g) = 0.774 mW/g; SAR(10 g) = 0.432 mW/g

Maximum value of SAR (measured) = 0.861 mW/g

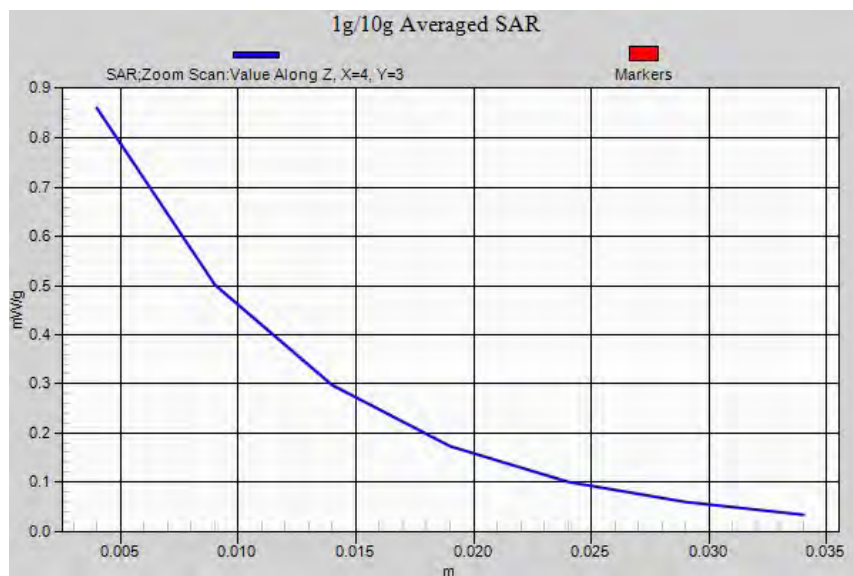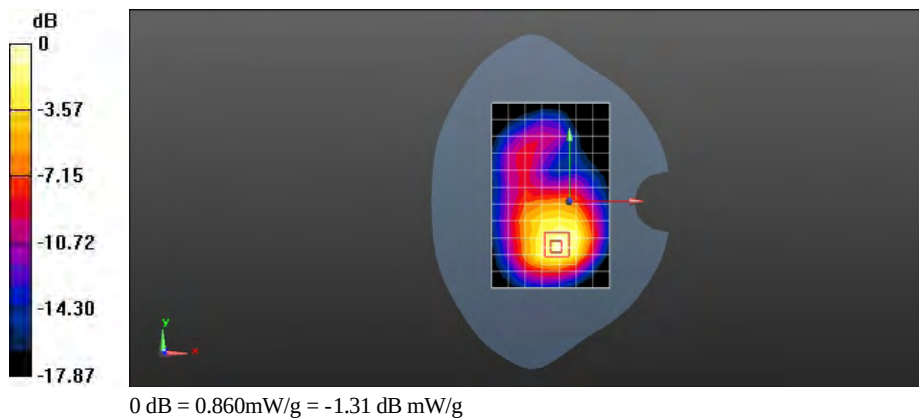

Test Laboratory: HUAWEI SAR Lab

U8665 GSM1900 EGPRS 2TS 661CH Towards Ground 10mm with battery SN-UAIBC20X03007197

DUT: U8665; Type: HSDPA/UMTS/GPRS/GSM/EDGE Mobile Phone with Bluetooth;; Serial: SAR2

Communication System: HW-GSM\GPRS\EGPRS-2TS; Frequency: 1880 MHz

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.516$ mho/m; $\epsilon_r = 53.356$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3578; ConvF(6.68, 6.68, 6.68); Calibrated: 6/21/2011
- Sensor-Surface: 4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE4 Sn852; Calibrated: 11/16/2011
- Phantom: SAM4; Type: SAM; Serial: TP-1620
- DASY52 52.8.0(692); SEMCAD X 14.6.4(4989)

Configuration/Body/Area Scan (8x12x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 0.701 mW/g


Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 11.902 V/m; Power Drift = -0.09 dB

Peak SAR (extrapolated) = 1.2920

SAR(1 g) = 0.744 mW/g; SAR(10 g) = 0.415 mW/g

Maximum value of SAR (measured) = 0.808 mW/g

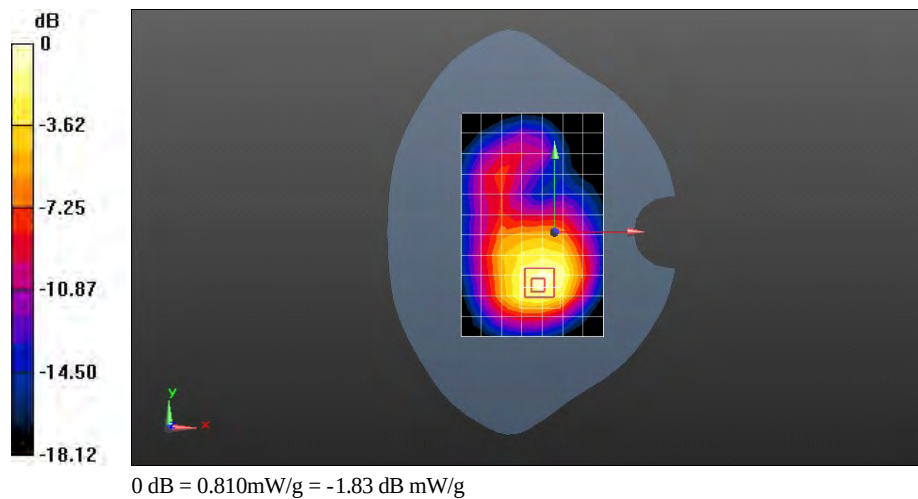

Test Laboratory: HUAWEI SAR Lab

U8665 GSM1900 EGPRS 2TS 661CH Towards Ground 10mm with battery SN-UNDC306X03000317

DUT: U8665; Type: HSDPA/UMTS/GPRS/GSM/EDGE Mobile Phone with Bluetooth;; Serial: SAR2

Communication System: HW-GSM\GPRS\EGPRS-2TS; Frequency: 1880 MHz

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.516$ mho/m; $\epsilon_r = 53.356$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3578; ConvF(6.68, 6.68, 6.68); Calibrated: 6/21/2011
- Sensor-Surface: 4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE4 Sn852; Calibrated: 11/16/2011
- Phantom: SAM4; Type: SAM; Serial: TP-1620
- DASY52 52.8.0(692); SEMCAD X 14.6.4(4989)

Configuration/Body/Area Scan (8x12x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 0.745 mW/g


Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 12.187 V/m; Power Drift = 0.04 dB

Peak SAR (extrapolated) = 1.2890

SAR(1 g) = 0.748 mW/g; SAR(10 g) = 0.413 mW/g

Maximum value of SAR (measured) = 0.829 mW/g

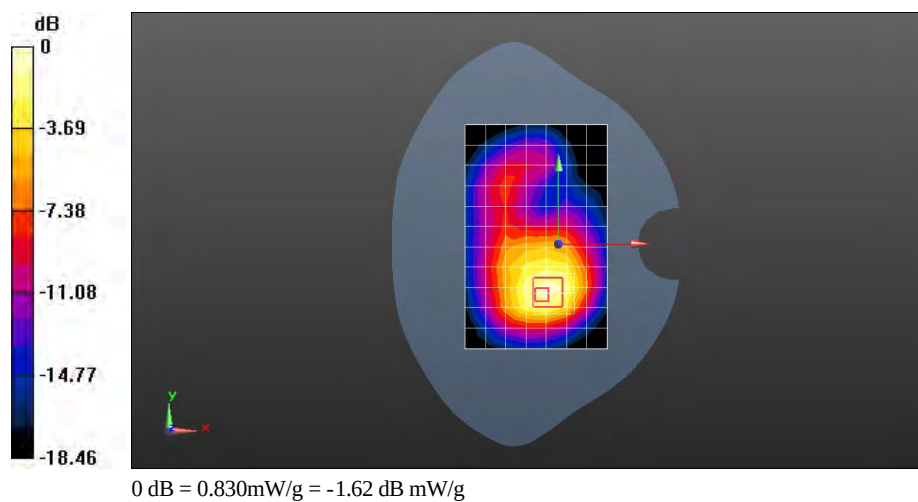

Test Laboratory: HUAWEI SAR Lab

U8665 GSM1900 EGPRS 2TS 661CH Towards Ground 10mm with battery SN-MHCBB066I44E1903

DUT: U8665; Type: HSDPA/UMTS/GPRS/GSM/EDGE Mobile Phone with Bluetooth;; Serial: SAR2

Communication System: HW-GSM\GPRS\EGPRS-2TS; Frequency: 1880 MHz

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.516$ mho/m; $\epsilon_r = 53.356$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3578; ConvF(6.68, 6.68, 6.68); Calibrated: 6/21/2011
- Sensor-Surface: 4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE4 Sn852; Calibrated: 11/16/2011
- Phantom: SAM4; Type: SAM; Serial: TP-1620
- DASY52 52.8.0(692); SEMCAD X 14.6.4(4989)

Configuration/Body/Area Scan (8x12x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 0.695 mW/g


Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 12.041 V/m; Power Drift = -0.0033 dB

Peak SAR (extrapolated) = 1.2770

SAR(1 g) = 0.740 mW/g; SAR(10 g) = 0.413 mW/g

Maximum value of SAR (measured) = 0.820 mW/g

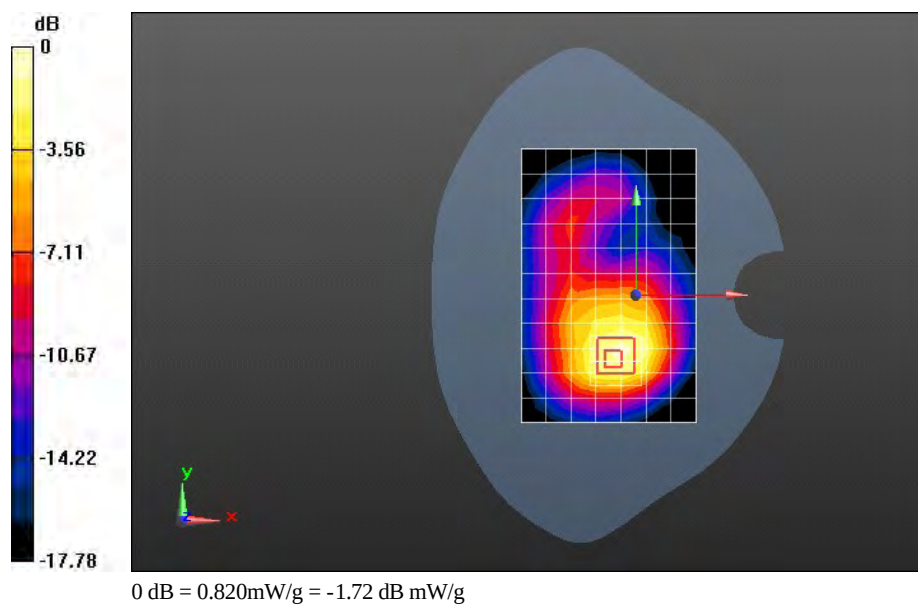

Test Laboratory: HUAWEI SAR Lab

U8665 GSM1900 GPRS 1TS 661CH Towards Phantom 15mm

DUT: U8665; Type: HSDPA/UMTS/GPRS/GSM/EDGE Mobile Phone with Bluetooth;; Serial: SAR2

Communication System: HW-GSM\GPRS\EGPRS-1TS; Frequency: 1880 MHz

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.516$ mho/m; $\epsilon_r = 53.356$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3578; ConvF(6.68, 6.68, 6.68); Calibrated: 6/21/2011
- Sensor-Surface: 4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE4 Sn852; Calibrated: 11/16/2011
- Phantom: SAM4; Type: SAM; Serial: TP-1620
- DASY52 52.8.0(692); SEMCAD X 14.6.4(4989)

Configuration/Body/Area Scan (8x12x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 0.339 mW/g


Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 6.058 V/m; Power Drift = -0.16 dB

Peak SAR (extrapolated) = 0.5190

SAR(1 g) = 0.318 mW/g; SAR(10 g) = 0.201 mW/g

Maximum value of SAR (measured) = 0.341 mW/g

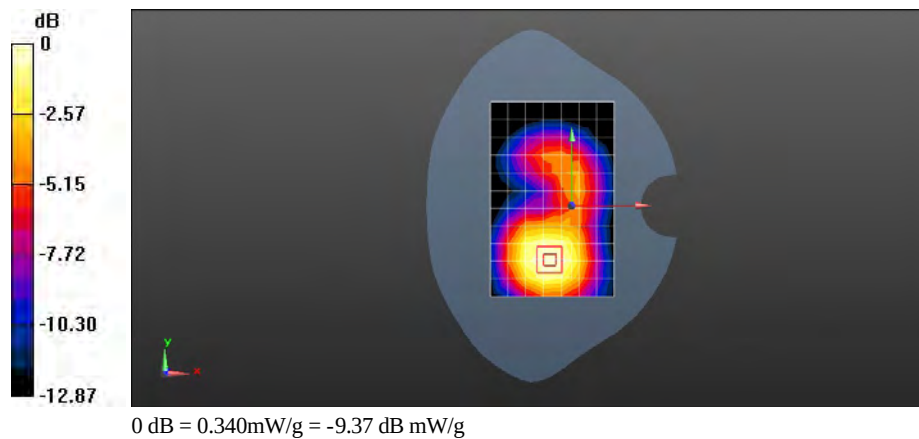

Test Laboratory: HUAWEI SAR Lab

U8665 GSM1900 GPRS 2TS 661CH Towards Phantom 15mm

DUT: U8665; Type: HSDPA/UMTS/GPRS/GSM/EDGE Mobile Phone with Bluetooth;; Serial: SAR2

Communication System: HW-GSM\GPRS\EGPRS-2TS; Frequency: 1880 MHz

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.516$ mho/m; $\epsilon_r = 53.356$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3578; ConvF(6.68, 6.68, 6.68); Calibrated: 6/21/2011
- Sensor-Surface: 4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE4 Sn852; Calibrated: 11/16/2011
- Phantom: SAM4; Type: SAM; Serial: TP-1620
- DASY52 52.8.0(692); SEMCAD X 14.6.4(4989)

Configuration/Body/Area Scan (8x12x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 0.366 mW/g


Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 6.126 V/m; Power Drift = -0.02 dB

Peak SAR (extrapolated) = 0.5630

SAR(1 g) = 0.346 mW/g; SAR(10 g) = 0.217 mW/g

Maximum value of SAR (measured) = 0.370 mW/g

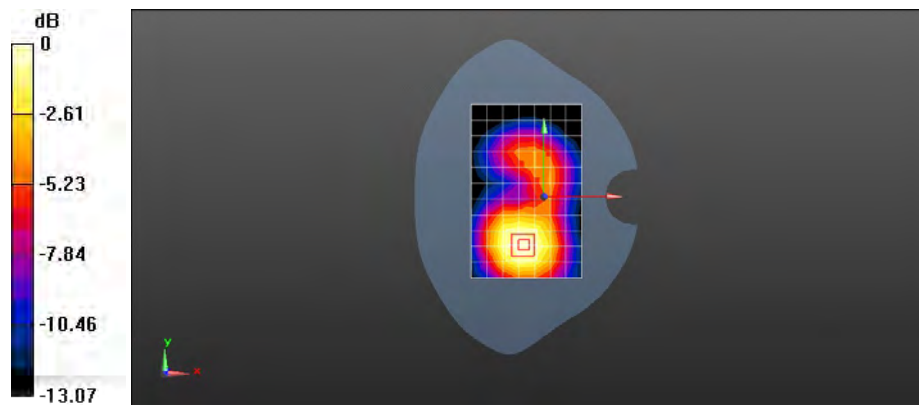

0 dB = 0.370mW/g = -8.64 dB mW/g

Test Laboratory: HUAWEI SAR Lab

U8665 GSM1900 GPRS 2TS 661CH Towards Ground 15mm

DUT: U8665; Type: HSDPA/UMTS/GPRS/GSM/EDGE Mobile Phone with Bluetooth;; Serial: SAR2

Communication System: HW-GSM\GPRS\EGPRS-2TS; Frequency: 1880 MHz

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.516$ mho/m; $\epsilon_r = 53.356$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3578; ConvF(6.68, 6.68, 6.68); Calibrated: 6/21/2011
- Sensor-Surface: 4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE4 Sn852; Calibrated: 11/16/2011
- Phantom: SAM4; Type: SAM; Serial: TP-1620
- DASY52 52.8.0(692); SEMCAD X 14.6.4(4989)

Configuration/Body/Area Scan (8x12x1): Measurement grid: $dx=15$ mm, $dy=15$ mm


Maximum value of SAR (measured) = 0.463 mW/g

Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 6.119 V/m; Power Drift = -0.14 dB

Peak SAR (extrapolated) = 0.7190

SAR(1 g) = 0.429 mW/g; SAR(10 g) = 0.248 mW/g

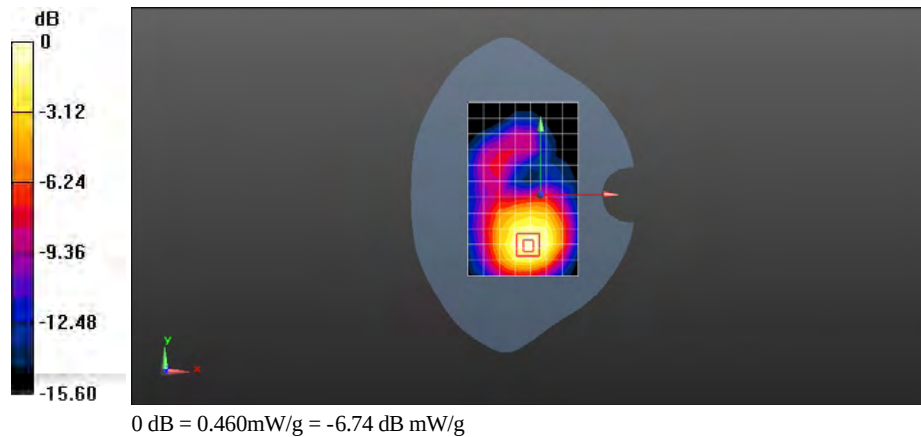

Test Laboratory: HUAWEI SAR Lab

U8665 GSM1900 EGPRS 1TS 661CH Towards Ground 15mm

DUT: U8665; Type: HSDPA/UMTS/GPRS/GSM/EDGE Mobile Phone with Bluetooth;; Serial: SAR2

Communication System: HW-GSM\GPRS\EGPRS-1TS; Frequency: 1880 MHz

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.516$ mho/m; $\epsilon_r = 53.356$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3578; ConvF(6.68, 6.68, 6.68); Calibrated: 6/21/2011
- Sensor-Surface: 4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE4 Sn852; Calibrated: 11/16/2011
- Phantom: SAM4; Type: SAM; Serial: TP-1620
- DASY52 52.8.0(692); SEMCAD X 14.6.4(4989)

Configuration/Body/Area Scan (8x12x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 0.435 mW/g


Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 6.126 V/m; Power Drift = 0.0038 dB

Peak SAR (extrapolated) = 0.6810

SAR(1 g) = 0.400 mW/g; SAR(10 g) = 0.230 mW/g

Maximum value of SAR (measured) = 0.434 mW/g

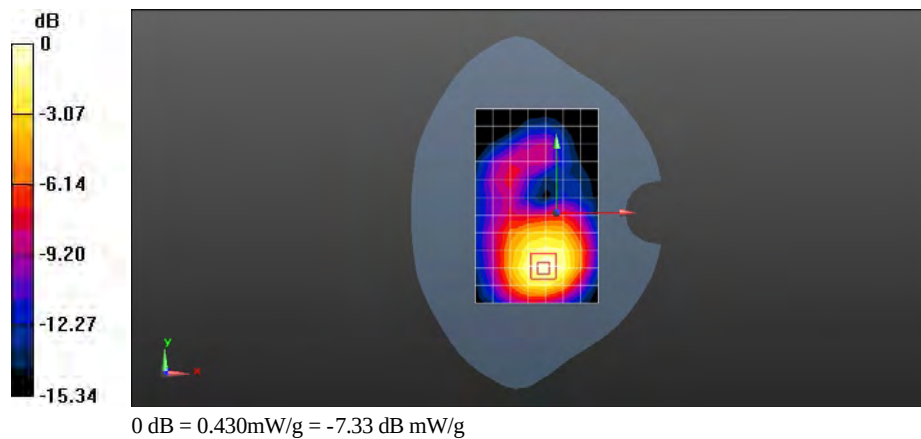

Test Laboratory: HUAWEI SAR Lab

U8665 GSM1900 EGPRS 2TS 661CH Towards Ground 15mm

DUT: U8665; Type: HSDPA/UMTS/GPRS/GSM/EDGE Mobile Phone with Bluetooth;; Serial: SAR2

Communication System: HW-GSM\GPRS\EGPRS-2TS; Frequency: 1880 MHz

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.516$ mho/m; $\epsilon_r = 53.356$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3578; ConvF(6.68, 6.68, 6.68); Calibrated: 6/21/2011
- Sensor-Surface: 4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE4 Sn852; Calibrated: 11/16/2011
- Phantom: SAM4; Type: SAM; Serial: TP-1620
- DASY52 52.8.0(692); SEMCAD X 14.6.4(4989)

Configuration/Body/Area Scan (8x12x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 0.473 mW/g


Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 6.494 V/m; Power Drift = -0.11 dB

Peak SAR (extrapolated) = 0.7190

SAR(1 g) = 0.432 mW/g; SAR(10 g) = 0.249 mW/g

Maximum value of SAR (measured) = 0.468 mW/g

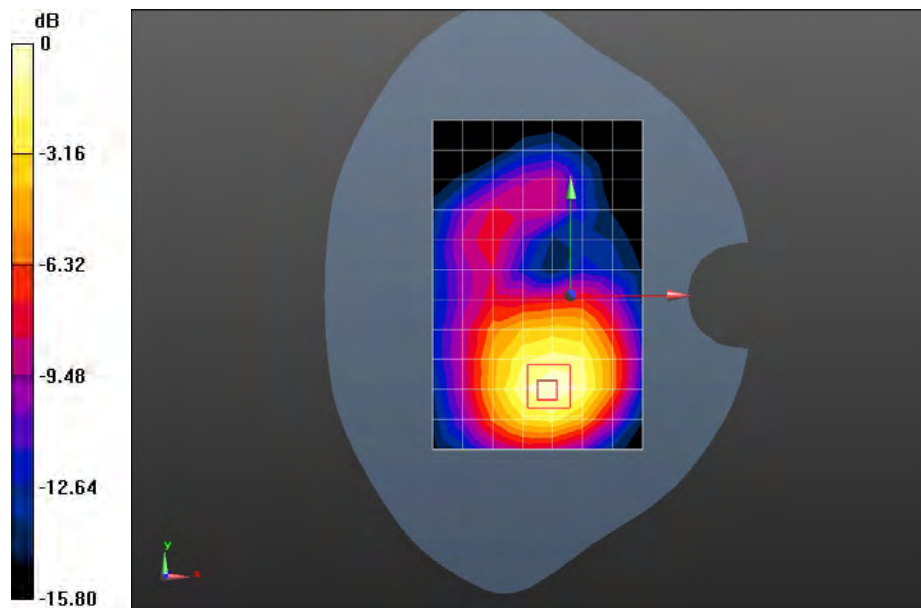

0 dB = 0.470mW/g = -6.56 dB mW/g

Test Laboratory: HUAWEI SAR Lab

U8665 GSM1900 661CH Towards Ground 15mm with headset

DUT: U8665; Type: HSDPA/UMTS/GPRS/GSM/EDGE Mobile Phone with Bluetooth;; Serial: SAR2

Communication System: HW-GSM\GPRS\EGPRS-1TS; Frequency: 1880 MHz

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.516$ mho/m; $\epsilon_r = 53.356$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3578; ConvF(6.68, 6.68, 6.68); Calibrated: 6/21/2011
- Sensor-Surface: 4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE4 Sn852; Calibrated: 11/16/2011
- Phantom: SAM4; Type: SAM; Serial: TP-1620
- DASY52 52.8.0(692); SEMCAD X 14.6.4(4989)

Configuration/Body/Area Scan (8x12x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 0.446 mW/g


Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 6.063 V/m; Power Drift = 0.15 dB

Peak SAR (extrapolated) = 0.6950

SAR(1 g) = 0.409 mW/g; SAR(10 g) = 0.235 mW/g

Maximum value of SAR (measured) = 0.443 mW/g

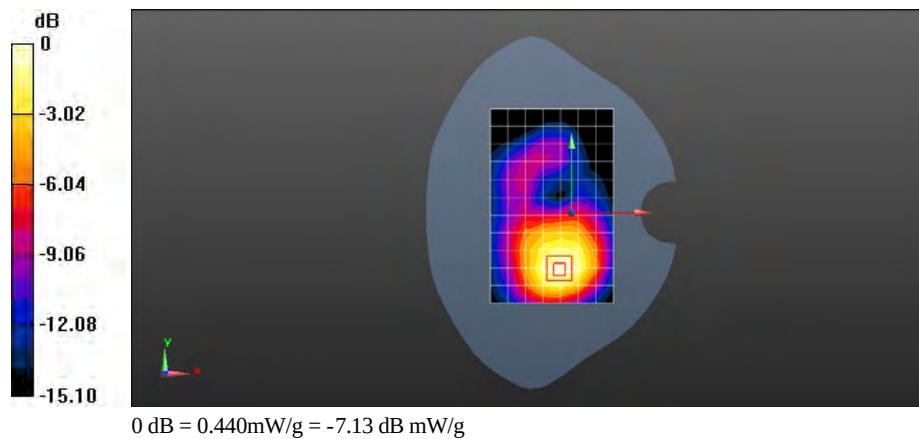

Test Laboratory: HUAWEI SAR Lab

U8665 GSM1900 EGPRS 2TS 661CH Towards Ground 15mm with battery SN-UNDC306X03000317

DUT: U8665; Type: HSDPA/UMTS/GPRS/GSM/EDGE Mobile Phone with Bluetooth;; Serial: SAR2

Communication System: HW-GSM\GPRS\EGPRS-2TS; Frequency: 1880 MHz

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.516$ mho/m; $\epsilon_r = 53.356$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3578; ConvF(6.68, 6.68, 6.68); Calibrated: 6/21/2011
- Sensor-Surface: 4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE4 Sn852; Calibrated: 11/16/2011
- Phantom: SAM4; Type: SAM; Serial: TP-1620
- DASY52 52.8.0(692); SEMCAD X 14.6.4(4989)

Configuration/Body/Area Scan (8x12x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 0.449 mW/g


Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 10.022 V/m; Power Drift = -0.0021 dB

Peak SAR (extrapolated) = 0.7090

SAR(1 g) = 0.425 mW/g; SAR(10 g) = 0.249 mW/g

Maximum value of SAR (measured) = 0.464 mW/g

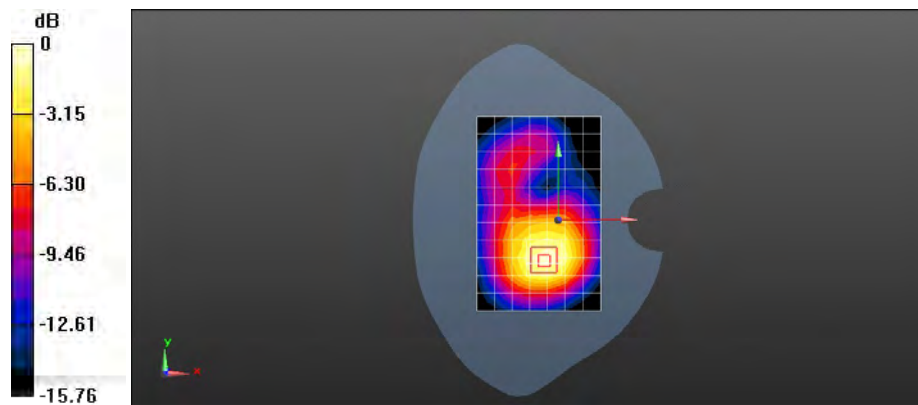

Test Laboratory: HUAWEI SAR Lab

U8665 GSM1900 EGPRS 2TS 661CH Towards Ground 15mm with battery SN-UAIBC20X03007197

DUT: U8665; Type: HSDPA/UMTS/GPRS/GSM/EDGE Mobile Phone with Bluetooth;; Serial: SAR2

Communication System: HW-GSM\GPRS\EGPRS-2TS; Frequency: 1880 MHz

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.516$ mho/m; $\epsilon_r = 53.356$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3578; ConvF(6.68, 6.68, 6.68); Calibrated: 6/21/2011
- Sensor-Surface: 4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE4 Sn852; Calibrated: 11/16/2011
- Phantom: SAM4; Type: SAM; Serial: TP-1620
- DASY52 52.8.0(692); SEMCAD X 14.6.4(4989)

Configuration/Body/Area Scan (8x12x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 0.433 mW/g


Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 9.619 V/m; Power Drift = 0.07 dB

Peak SAR (extrapolated) = 0.7090

SAR(1 g) = 0.424 mW/g; SAR(10 g) = 0.247 mW/g

Maximum value of SAR (measured) = 0.463 mW/g

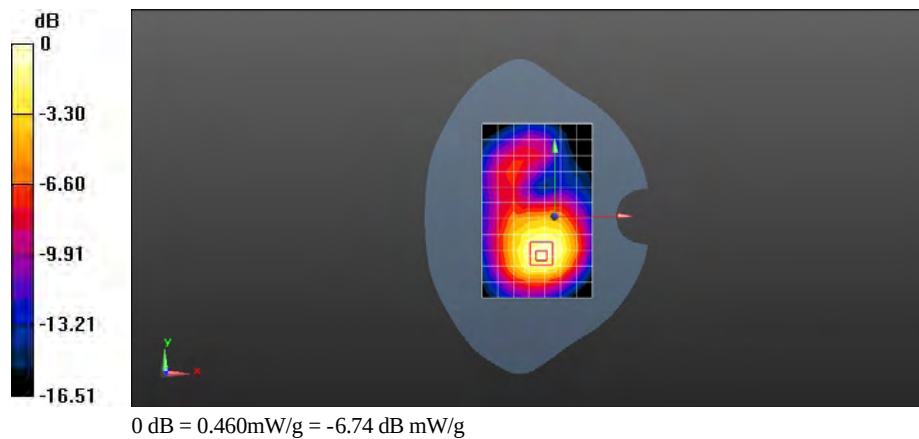

Test Laboratory: HUAWEI SAR Lab

U8665 GSM1900 EGPRS 2TS 661CH Towards Ground 15mm with battery SN-MHCBB066I44E1903

DUT: U8665; Type: HSDPA/UMTS/GPRS/GSM/EDGE Mobile Phone with Bluetooth;; Serial: SAR2

Communication System: HW-GSM\GPRS\EGPRS-2TS; Frequency: 1880 MHz

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.516$ mho/m; $\epsilon_r = 53.356$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3578; ConvF(6.68, 6.68, 6.68); Calibrated: 6/21/2011
- Sensor-Surface: 4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE4 Sn852; Calibrated: 11/16/2011
- Phantom: SAM4; Type: SAM; Serial: TP-1620
- DASY52 52.8.0(692); SEMCAD X 14.6.4(4989)

Configuration/Body/Area Scan (8x12x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 0.434 mW/g


Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 9.759 V/m; Power Drift = -0.05 dB

Peak SAR (extrapolated) = 0.6960

SAR(1 g) = 0.424 mW/g; SAR(10 g) = 0.248 mW/g

Maximum value of SAR (measured) = 0.464 mW/g

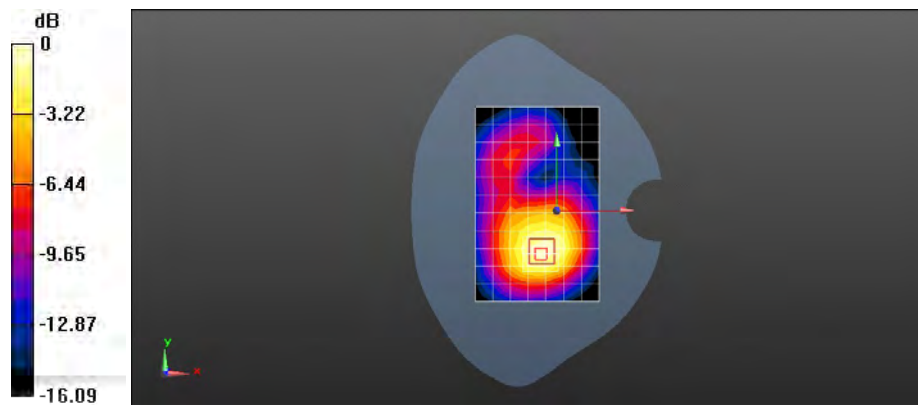

0 dB = 0.460mW/g = -6.74 dB mW/g

Test Laboratory: HUAWEI SAR Lab

U8665 WCDMA850 4182CH Left hand touch cheek

DUT: U8665; Type: HSDPA/UMTS/GPRS/GSM/EDGE Mobile Phone with Bluetooth;; Serial: SAR2

Communication System: HW-UMTS-FDD(WCDMA); Frequency: 836.4 MHz

Medium parameters used (interpolated): $f = 836.4$ MHz; $\sigma = 0.881$ mho/m; $\epsilon_r = 40.324$; $\rho = 1000$ kg/m³

Phantom section: Left Section

DASY Configuration:

- Probe: EX3DV4 - SN3578; ConvF(8.33, 8.33, 8.33); Calibrated: 6/21/2011
- Sensor-Surface: 4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE4 Sn852; Calibrated: 11/16/2011
- Phantom: SAM4; Type: SAM; Serial: TP-1620
- DASY52 52.8.0(692); SEMCAD X 14.6.4(4989)

Configuration/Head/Area Scan (8x12x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.466 mW/g

Configuration/Head/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm


Reference Value = 9.601 V/m; Power Drift = 0.04 dB

Peak SAR (extrapolated) = 0.5540

SAR(1 g) = 0.443 mW/g; SAR(10 g) = 0.338 mW/g

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.465 mW/g

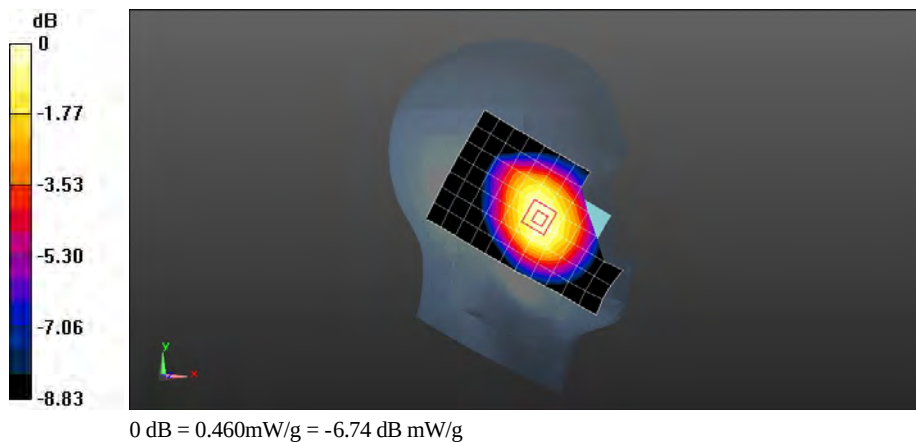

Test Laboratory: HUAWEI SAR Lab

U8665 WCDMA850 4182CH Left hand tilt 15 degree

DUT: U8665; Type: HSDPA/UMTS/GPRS/GSM/EDGE Mobile Phone with Bluetooth;; Serial: SAR2

Communication System: HW-UMTS-FDD(WCDMA); Frequency: 836.4 MHz

Medium parameters used (interpolated): $f = 836.4$ MHz; $\sigma = 0.881$ mho/m; $\epsilon_r = 40.324$; $\rho = 1000$ kg/m³

Phantom section: Left Section

DASY Configuration:

- Probe: EX3DV4 - SN3578; ConvF(8.33, 8.33, 8.33); Calibrated: 6/21/2011
- Sensor-Surface: 4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE4 Sn852; Calibrated: 11/16/2011
- Phantom: SAM4; Type: SAM; Serial: TP-1620
- DASY52 52.8.0(692); SEMCAD X 14.6.4(4989)

Configuration/Head/Area Scan (8x12x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.377 mW/g

Configuration/Head/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm


Reference Value = 16.167 V/m; Power Drift = -0.06 dB

Peak SAR (extrapolated) = 0.4670

SAR(1 g) = 0.371 mW/g; SAR(10 g) = 0.282 mW/g

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.389 mW/g

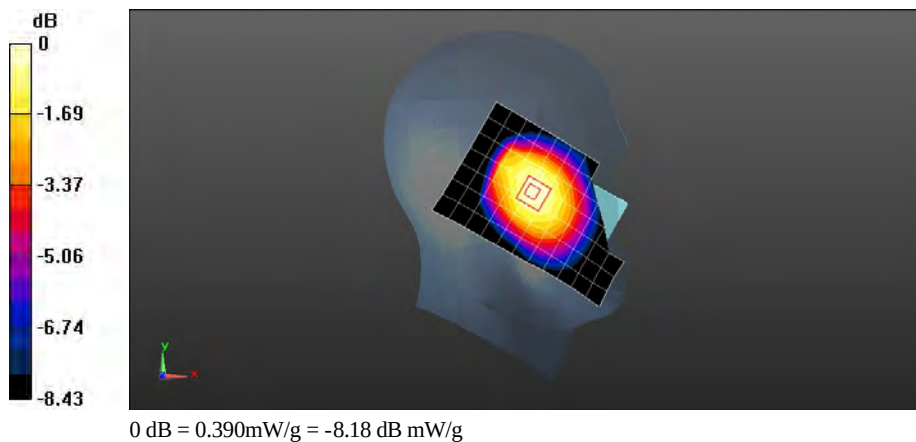

Test Laboratory: HUAWEI SAR Lab

U8665 WCDMA850 4182CH Right hand touch cheek

DUT: U8665; Type: HSDPA/UMTS/GPRS/GSM/EDGE Mobile Phone with Bluetooth;; Serial: SAR2

Communication System: HW-UMTS-FDD(WCDMA); Frequency: 836.4 MHz

Medium parameters used (interpolated): $f = 836.4$ MHz; $\sigma = 0.881$ mho/m; $\epsilon_r = 40.324$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY Configuration:

- Probe: EX3DV4 - SN3578; ConvF(8.33, 8.33, 8.33); Calibrated: 6/21/2011
- Sensor-Surface: 4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE4 Sn852; Calibrated: 11/16/2011
- Phantom: SAM4; Type: SAM; Serial: TP-1620
- DASY52 52.8.0(692); SEMCAD X 14.6.4(4989)

Configuration/Head/Area Scan (8x12x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.523 mW/g

Configuration/Head/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm


Reference Value = 10.473 V/m; Power Drift = 0.12 dB

Peak SAR (extrapolated) = 0.6610

SAR(1 g) = 0.503 mW/g; SAR(10 g) = 0.378 mW/g

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.540 mW/g

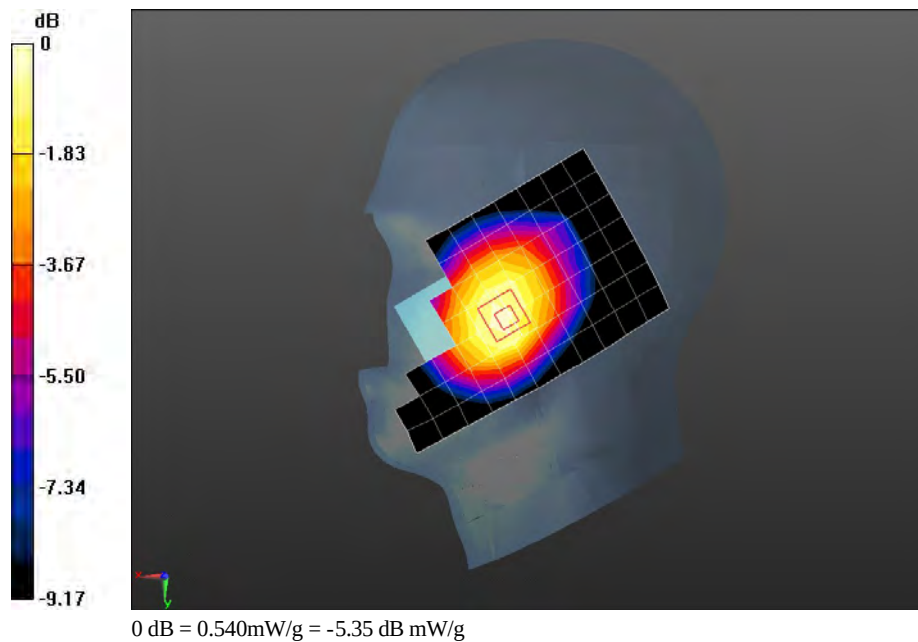

Test Laboratory: HUAWEI SAR Lab

U8665 WCDMA850 4182CH Right hand tilt 15 degree

DUT: U8665; Type: HSDPA/UMTS/GPRS/GSM/EDGE Mobile Phone with Bluetooth;; Serial: SAR2

Communication System: HW-UMTS-FDD(WCDMA); Frequency: 836.4 MHz

Medium parameters used (interpolated): $f = 836.4$ MHz; $\sigma = 0.881$ mho/m; $\epsilon_r = 40.324$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY Configuration:

- Probe: EX3DV4 - SN3578; ConvF(8.33, 8.33, 8.33); Calibrated: 6/21/2011
- Sensor-Surface: 4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE4 Sn852; Calibrated: 11/16/2011
- Phantom: SAM4; Type: SAM; Serial: TP-1620
- DASY52 52.8.0(692); SEMCAD X 14.6.4(4989)

Configuration/Head/Area Scan (8x12x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.370 mW/g

Configuration/Head/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm


Reference Value = 16.909 V/m; Power Drift = 0.08 dB

Peak SAR (extrapolated) = 0.4730

SAR(1 g) = 0.371 mW/g; SAR(10 g) = 0.280 mW/g

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.389 mW/g

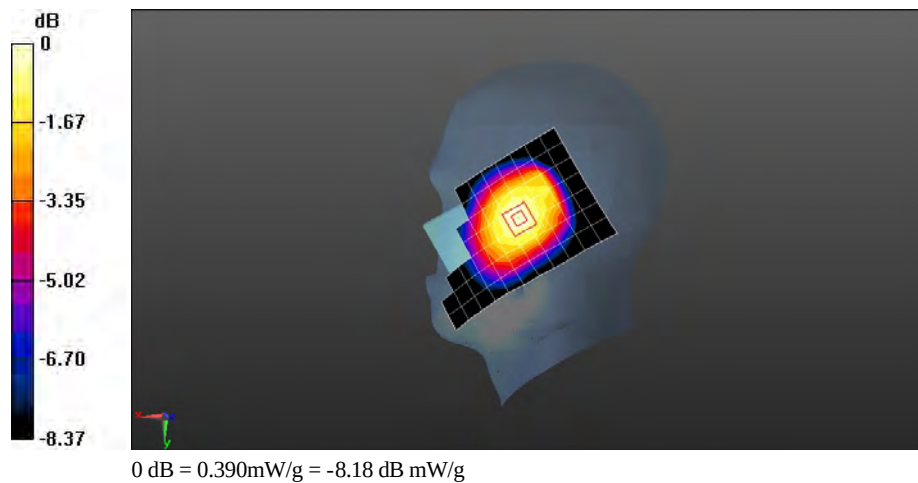

Test Laboratory: HUAWEI SAR Lab

U8665 WCDMA850 4182CH Right hand touch cheek with battery SN-UAIBC20X03007197

DUT: U8665; Type: HSDPA/UMTS/GPRS/GSM/EDGE Mobile Phone with Bluetooth;; Serial: SAR2

Communication System: HW-UMTS-FDD(WCDMA); Frequency: 836.4 MHz

Medium parameters used (interpolated): $f = 836.4$ MHz; $\sigma = 0.881$ mho/m; $\epsilon_r = 40.324$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY Configuration:

- Probe: EX3DV4 - SN3578; ConvF(8.33, 8.33, 8.33); Calibrated: 6/21/2011
- Sensor-Surface: 4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE4 Sn852; Calibrated: 11/16/2011
- Phantom: SAM4; Type: SAM; Serial: TP-1620
- DASY52 52.8.0(692); SEMCAD X 14.6.4(4989)

Configuration/Head/Area Scan (8x12x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.530 mW/g

Configuration/Head/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm


Reference Value = 9.556 V/m; Power Drift = 0.14 dB

Peak SAR (extrapolated) = 0.6710

SAR(1 g) = 0.502 mW/g; SAR(10 g) = 0.380 mW/g

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.531 mW/g

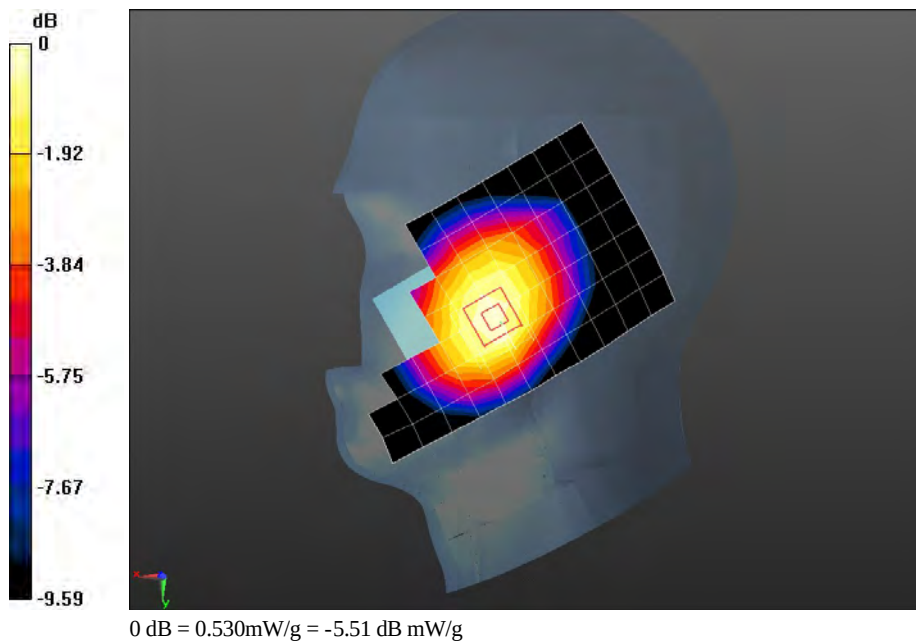

Test Laboratory: HUAWEI SAR Lab

U8665 WCDMA850 4182CH Right hand touch cheek with battery SN-UNDC306X03000317

DUT: U8665; Type: HSDPA/UMTS/GPRS/GSM/EDGE Mobile Phone with Bluetooth;; Serial: SAR2

Communication System: HW-UMTS-FDD(WCDMA); Frequency: 836.4 MHz

Medium parameters used (interpolated): $f = 836.4$ MHz; $\sigma = 0.881$ mho/m; $\epsilon_r = 40.324$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY Configuration:

- Probe: EX3DV4 - SN3578; ConvF(8.33, 8.33, 8.33); Calibrated: 6/21/2011
- Sensor-Surface: 4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE4 Sn852; Calibrated: 11/16/2011
- Phantom: SAM4; Type: SAM; Serial: TP-1620
- DASY52 52.8.0(692); SEMCAD X 14.6.4(4989)

Configuration/Head/Area Scan (8x12x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.527 mW/g

Configuration/Head/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm


Reference Value = 10.159 V/m; Power Drift = 0.17 dB

Peak SAR (extrapolated) = 0.6700

SAR(1 g) = 0.507 mW/g; SAR(10 g) = 0.375 mW/g

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.538 mW/g

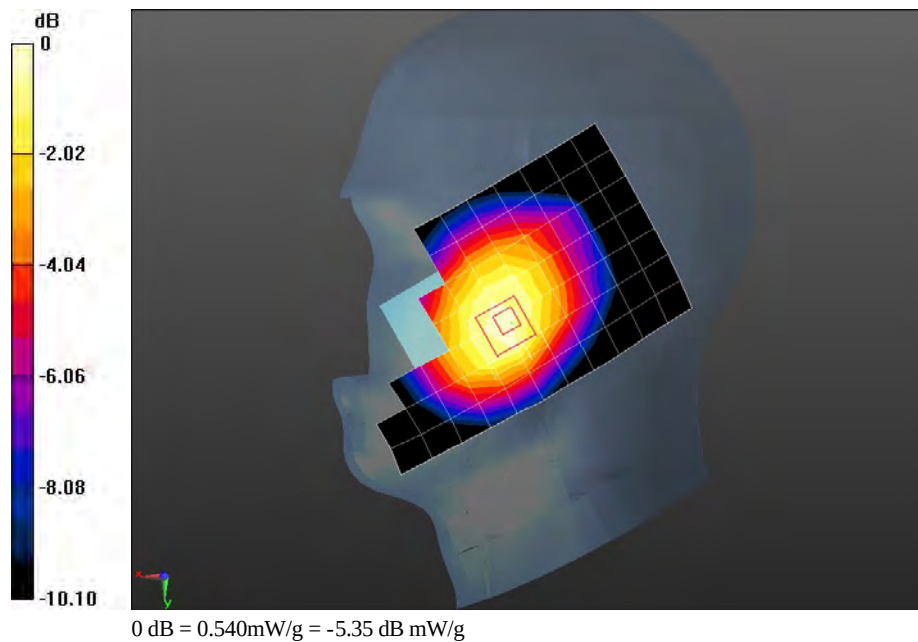

Test Laboratory: HUAWEI SAR Lab

U8665 WCDMA850 4182CH Right hand touch cheek with battery SN-MHCBB066I44E1903

DUT: U8665; Type: HSDPA/UMTS/GPRS/GSM/EDGE Mobile Phone with Bluetooth;; Serial: SAR2

Communication System: HW-UMTS-FDD(WCDMA); Frequency: 836.4 MHz

Medium parameters used (interpolated): $f = 836.4$ MHz; $\sigma = 0.881$ mho/m; $\epsilon_r = 40.324$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY Configuration:

- Probe: EX3DV4 - SN3578; ConvF(8.33, 8.33, 8.33); Calibrated: 6/21/2011
- Sensor-Surface: 4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE4 Sn852; Calibrated: 11/16/2011
- Phantom: SAM4; Type: SAM; Serial: TP-1620
- DASY52 52.8.0(692); SEMCAD X 14.6.4(4989)

Configuration/Head/Area Scan (8x12x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.544 mW/g

Configuration/Head/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm



Reference Value = 10.965 V/m; Power Drift = -0.07 dB

Peak SAR (extrapolated) = 0.6820

SAR(1 g) = 0.522 mW/g; SAR(10 g) = 0.390 mW/g

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.555 mW/g

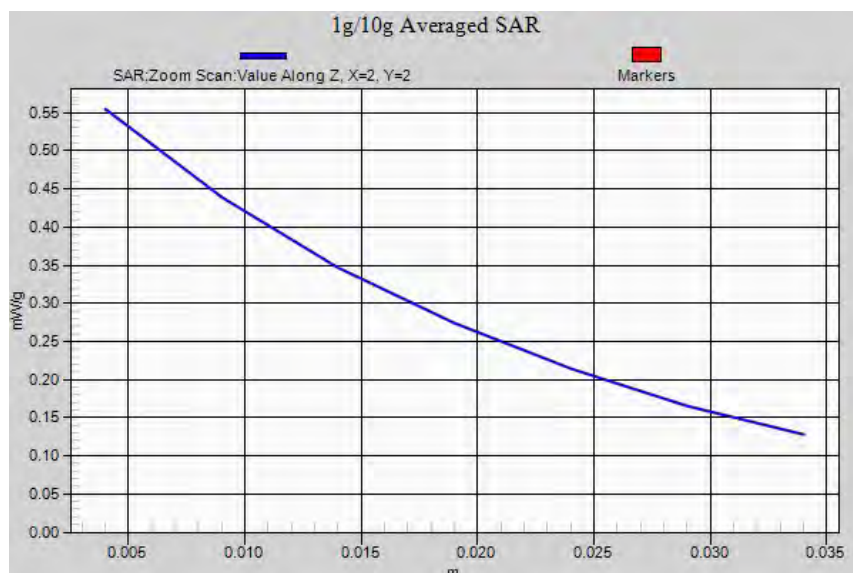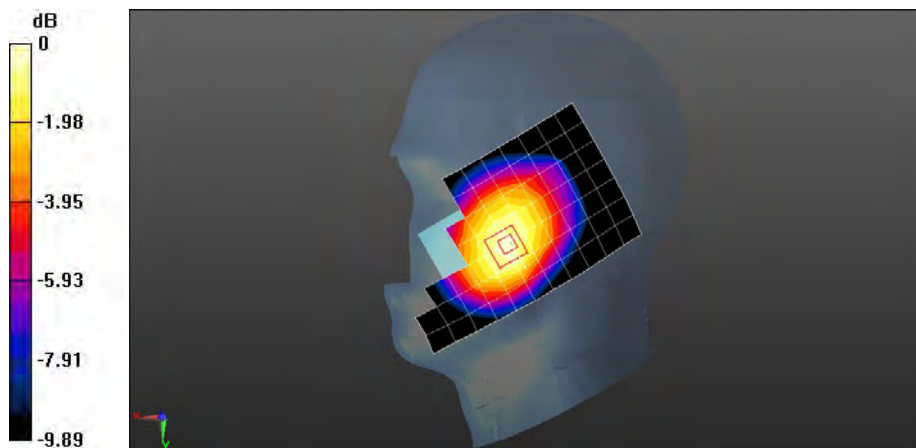

Test Laboratory: HUAWEI SAR Lab

U8665 WCDMA850 4182CH Towards Phantom 10mm

DUT: U8665; Type: HSDPA/UMTS/GPRS/GSM/EDGE Mobile Phone with Bluetooth;; Serial: SAR2

Communication System: HW-UMTS-FDD(WCDMA); Frequency: 836.4 MHz

Medium parameters used (interpolated): $f = 836.4$ MHz; $\sigma = 0.982$ mho/m; $\epsilon_r = 54.782$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3578; ConvF(8.45, 8.45, 8.45); Calibrated: 6/21/2011
- Sensor-Surface: 4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE4 Sn852; Calibrated: 11/16/2011
- Phantom: SAM3; Type: SAM; Serial: TP-1597
- DASY52 52.8.0(692); SEMCAD X 14.6.4(4989)

Configuration/Body/Area Scan (8x11x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.548 mW/g

Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm


Reference Value = 23.232 V/m; Power Drift = 0.08 dB

Peak SAR (extrapolated) = 0.6870

SAR(1 g) = 0.540 mW/g; SAR(10 g) = 0.411 mW/g

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.566 mW/g

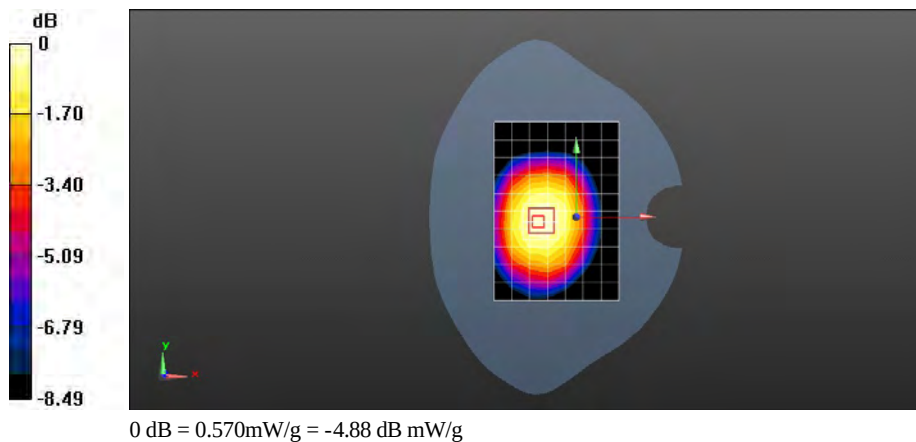

Test Laboratory: HUAWEI SAR Lab

U8665 WCDMA850 4233CH Towards Ground 10mm

DUT: U8665; Type: HSDPA/UMTS/GPRS/GSM/EDGE Mobile Phone with Bluetooth;; Serial: SAR2

Communication System: HW-UMTS-FDD(WCDMA); Frequency: 846.6 MHz

Medium parameters used: $f = 847$ MHz; $\sigma = 0.992$ mho/m; $\epsilon_r = 54.687$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3578; ConvF(8.45, 8.45, 8.45); Calibrated: 6/21/2011
- Sensor-Surface: 4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE4 Sn852; Calibrated: 11/16/2011
- Phantom: SAM3; Type: SAM; Serial: TP-1597
- DASY52 52.8.0(692); SEMCAD X 14.6.4(4989)

Configuration/Body/Area Scan (8x11x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 0.847 mW/g


Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 29.237 V/m; Power Drift = -0.0025 dB

Peak SAR (extrapolated) = 1.1020

SAR(1 g) = 0.831 mW/g; SAR(10 g) = 0.601 mW/g

Maximum value of SAR (measured) = 0.878 mW/g

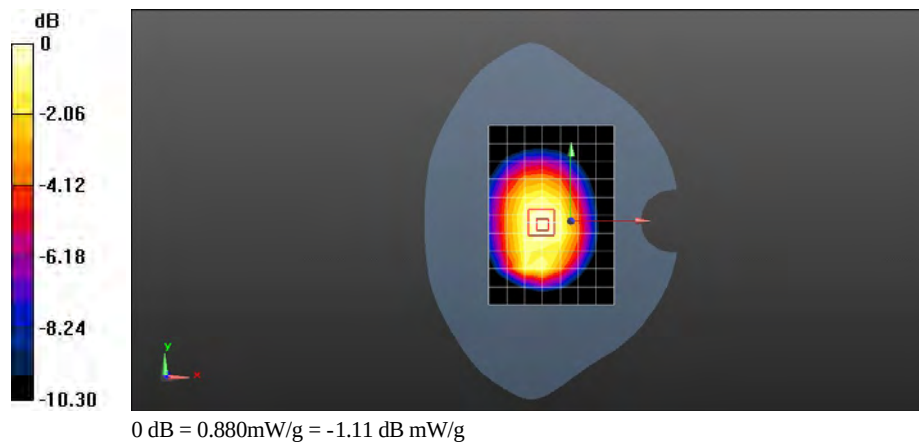

Test Laboratory: HUAWEI SAR Lab

U8665 WCDMA850 4182CH Towards Ground 10mm

DUT: U8665; Type: HSDPA/UMTS/GPRS/GSM/EDGE Mobile Phone with Bluetooth;; Serial: SAR2

Communication System: HW-UMTS-FDD(WCDMA); Frequency: 836.4 MHz

Medium parameters used (interpolated): $f = 836.4$ MHz; $\sigma = 0.982$ mho/m; $\epsilon_r = 54.782$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3578; ConvF(8.45, 8.45, 8.45); Calibrated: 6/21/2011
- Sensor-Surface: 4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE4 Sn852; Calibrated: 11/16/2011
- Phantom: SAM3; Type: SAM; Serial: TP-1597
- DASY52 52.8.0(692); SEMCAD X 14.6.4(4989)

Configuration/Body/Area Scan (8x11x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.949 mW/g

Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm


Reference Value = 30.936 V/m; Power Drift = -0.0086 dB

Peak SAR (extrapolated) = 1.2330

SAR(1 g) = 0.926 mW/g; SAR(10 g) = 0.669 mW/g

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.979 mW/g

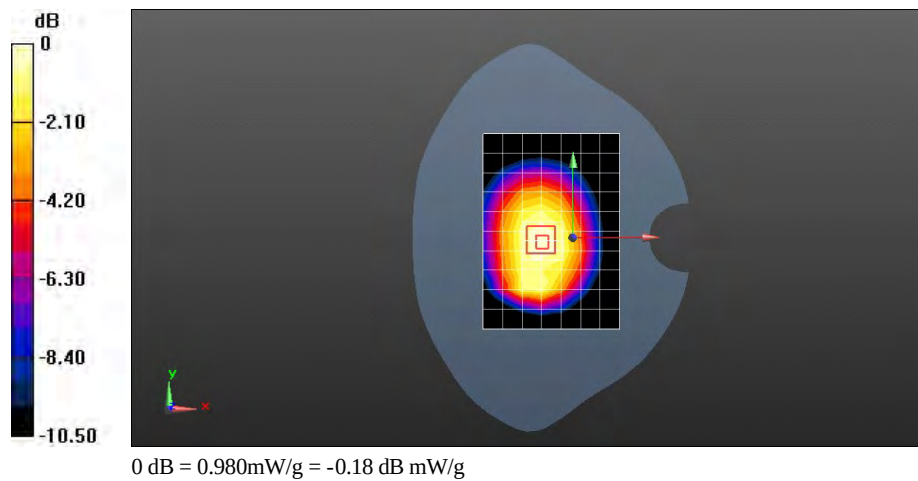

Test Laboratory: HUAWEI SAR Lab

U8665 WCDMA850 4132CH Towards Ground 10mm

DUT: U8665; Type: HSDPA/UMTS/GPRS/GSM/EDGE Mobile Phone with Bluetooth;; Serial: SAR2

Communication System: HW-UMTS-FDD(WCDMA); Frequency: 826.4 MHz

Medium parameters used (interpolated): $f = 826.4$ MHz; $\sigma = 0.972$ mho/m; $\epsilon_r = 54.863$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3578; ConvF(8.45, 8.45, 8.45); Calibrated: 6/21/2011
- Sensor-Surface: 4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE4 Sn852; Calibrated: 11/16/2011
- Phantom: SAM3; Type: SAM; Serial: TP-1597
- DASY52 52.8.0(692); SEMCAD X 14.6.4(4989)

Configuration/Body/Area Scan (8x11x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 1.001 mW/g

Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm


Reference Value = 31.908 V/m; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 1.2940

SAR(1 g) = 0.975 mW/g; SAR(10 g) = 0.705 mW/g

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 1.031 mW/g

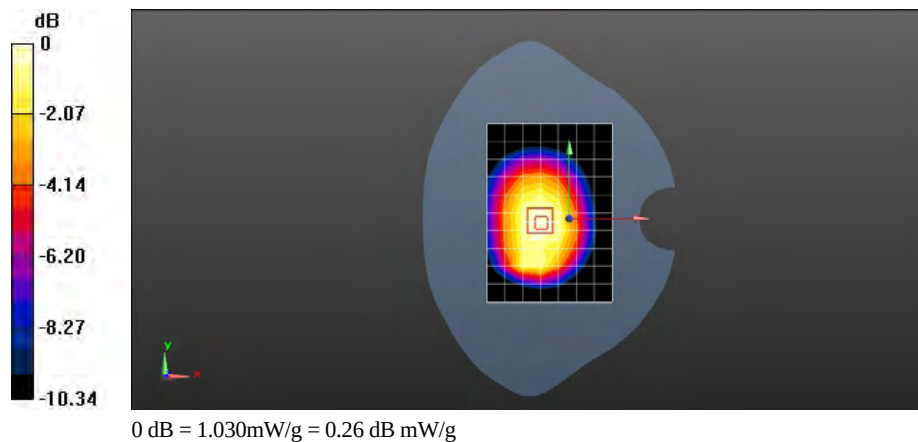

Test Laboratory: HUAWEI SAR Lab

U8665 WCDMA850 4182CH Left edge 10mm

DUT: U8665; Type: HSDPA/UMTS/GPRS/GSM/EDGE Mobile Phone with Bluetooth;; Serial: SAR2

Communication System: HW-UMTS-FDD(WCDMA); Frequency: 836.4 MHz

Medium parameters used (interpolated): $f = 836.4$ MHz; $\sigma = 0.982$ mho/m; $\epsilon_r = 54.782$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3578; ConvF(8.45, 8.45, 8.45); Calibrated: 6/21/2011
- Sensor-Surface: 4mm (Mechanical Surface Detection), $z = 1.0$, 31.0
- Electronics: DAE4 Sn852; Calibrated: 11/16/2011
- Phantom: SAM3; Type: SAM; Serial: TP-1597
- DASY52 52.8.0(692); SEMCAD X 14.6.4(4989)

Configuration/Body/Area Scan (8x11x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.497 mW/g

Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm


Reference Value = 20.513 V/m; Power Drift = 0.07 dB

Peak SAR (extrapolated) = 0.6640

SAR(1 g) = 0.470 mW/g; SAR(10 g) = 0.321 mW/g

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.503 mW/g

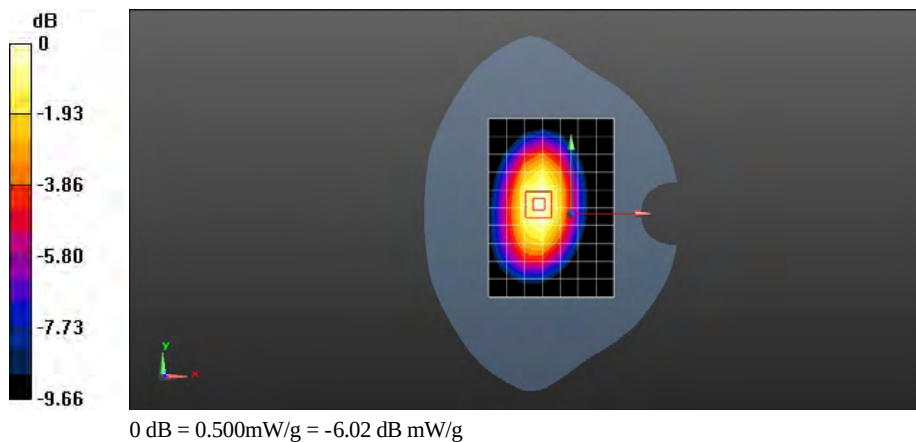

Test Laboratory: HUAWEI SAR Lab

U8665 WCDMA850 4182CH Right edge 10mm

DUT: U8665; Type: HSDPA/UMTS/GPRS/GSM/EDGE Mobile Phone with Bluetooth;; Serial: SAR2

Communication System: HW-UMTS-FDD(WCDMA); Frequency: 836.4 MHz

Medium parameters used (interpolated): $f = 836.4$ MHz; $\sigma = 0.982$ mho/m; $\epsilon_r = 54.782$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3578; ConvF(8.45, 8.45, 8.45); Calibrated: 6/21/2011
- Sensor-Surface: 4mm (Mechanical Surface Detection), $z = 1.0$, 31.0
- Electronics: DAE4 Sn852; Calibrated: 11/16/2011
- Phantom: SAM3; Type: SAM; Serial: TP-1597
- DASY52 52.8.0(692); SEMCAD X 14.6.4(4989)

Configuration/Body/Area Scan (8x11x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.640 mW/g

Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm


Reference Value = 23.763 V/m; Power Drift = 0.09 dB

Peak SAR (extrapolated) = 0.8400

SAR(1 g) = 0.603 mW/g; SAR(10 g) = 0.420 mW/g

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.642 mW/g

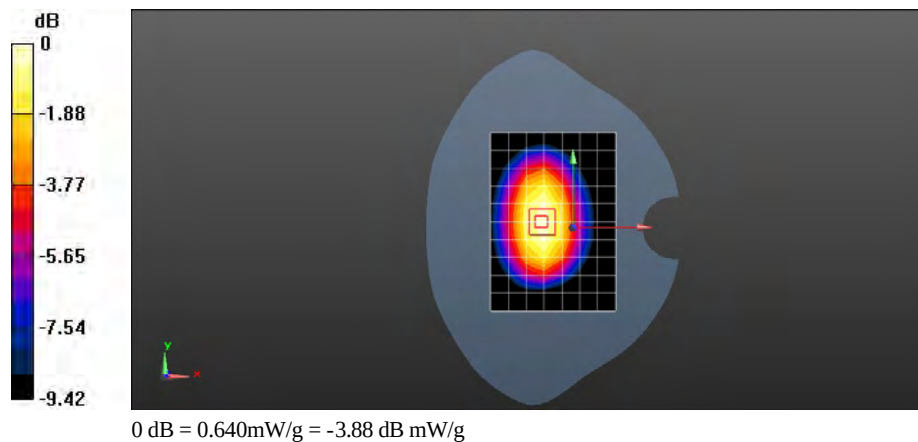

Test Laboratory: HUAWEI SAR Lab

U8665 WCDMA850 4182CH Bottom edge 10mm

DUT: U8665; Type: HSDPA/UMTS/GPRS/GSM/EDGE Mobile Phone with Bluetooth;; Serial: SAR2

Communication System: HW-UMTS-FDD(WCDMA); Frequency: 836.4 MHz

Medium parameters used (interpolated): $f = 836.4$ MHz; $\sigma = 0.982$ mho/m; $\epsilon_r = 54.782$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3578; ConvF(8.45, 8.45, 8.45); Calibrated: 6/21/2011
- Sensor-Surface: 4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE4 Sn852; Calibrated: 11/16/2011
- Phantom: SAM3; Type: SAM; Serial: TP-1597
- DASY52 52.8.0(692); SEMCAD X 14.6.4(4989)

Configuration/Body/Area Scan (8x11x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.146 mW/g


Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 7.268 V/m; Power Drift = 0.09 dB

Peak SAR (extrapolated) = 0.2080

SAR(1 g) = 0.135 mW/g; SAR(10 g) = 0.085 mW/g

[Info: Interpolated medium parameters used for SAR evaluation.](#)

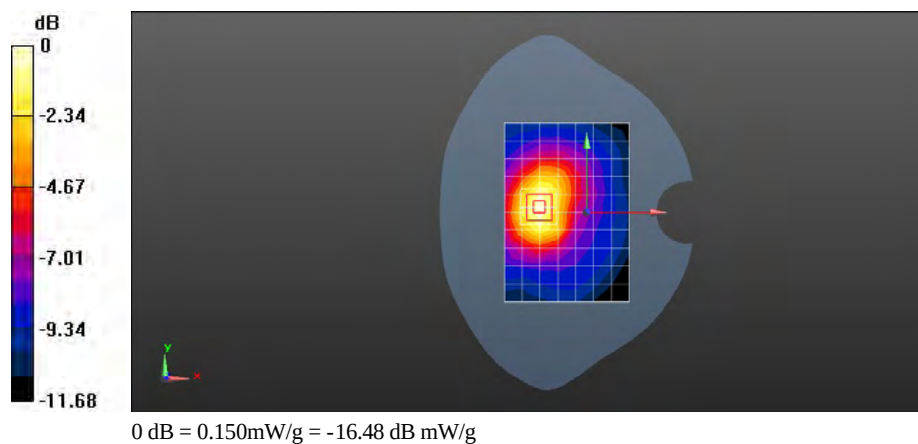

Test Laboratory: HUAWEI SAR Lab

U8665 WCDMA850 4132CH Towards Ground 10mm with HSDPA

DUT: U8665; Type: HSDPA/UMTS/GPRS/GSM/EDGE Mobile Phone with Bluetooth;; Serial: SAR2

Communication System: HW-UMTS-FDD(WCDMA); Frequency: 826.4 MHz

Medium parameters used (interpolated): $f = 826.4$ MHz; $\sigma = 0.972$ mho/m; $\epsilon_r = 54.863$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3578; ConvF(8.45, 8.45, 8.45); Calibrated: 6/21/2011
- Sensor-Surface: 4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE4 Sn852; Calibrated: 11/16/2011
- Phantom: SAM3; Type: SAM; Serial: TP-1597
- DASY52 52.8.0(692); SEMCAD X 14.6.4(4989)

Configuration/Body/Area Scan (8x11x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.951 mW/g

Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm


Reference Value = 30.828 V/m; Power Drift = -0.0073 dB

Peak SAR (extrapolated) = 1.2220

SAR(1 g) = 0.920 mW/g; SAR(10 g) = 0.668 mW/g

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.971 mW/g

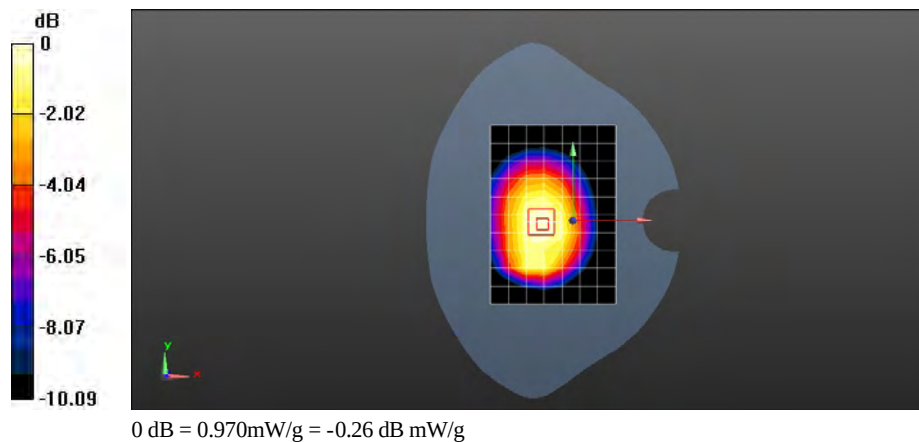

Test Laboratory: HUAWEI SAR Lab

U8665 WCDMA850 4132CH Towards Ground 10mm with battery SN-UAIBC20X03007197

DUT: U8665; Type: HSDPA/UMTS/GPRS/GSM/EDGE Mobile Phone with Bluetooth;; Serial: SAR2

Communication System: HW-UMTS-FDD(WCDMA); Frequency: 826.4 MHz

Medium parameters used (interpolated): $f = 826.4$ MHz; $\sigma = 0.972$ mho/m; $\epsilon_r = 54.863$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3578; ConvF(8.45, 8.45, 8.45); Calibrated: 6/21/2011
- Sensor-Surface: 4mm (Mechanical Surface Detection), $z = 1.0$, 31.0
- Electronics: DAE4 Sn852; Calibrated: 11/16/2011
- Phantom: SAM3; Type: SAM; Serial: TP-1597
- DASY52 52.8.0(692); SEMCAD X 14.6.4(4989)

Configuration/Body/Area Scan (8x11x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 1.012 mW/g

Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm


Reference Value = 31.837 V/m; Power Drift = -0.01 dB

Peak SAR (extrapolated) = 1.2970

SAR(1 g) = 0.983 mW/g; SAR(10 g) = 0.712 mW/g

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 1.042 mW/g

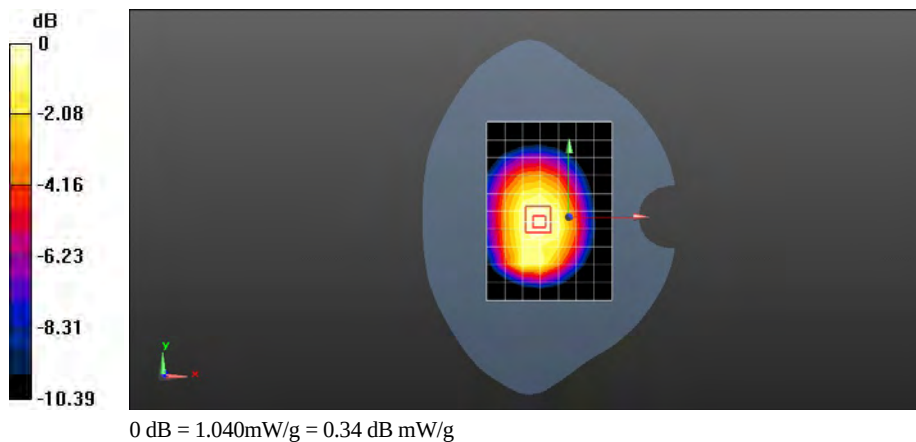

Test Laboratory: HUAWEI SAR Lab

U8665 WCDMA850 4132CH Towards Ground 10mm with battery SN-UNDC306X03000317

DUT: U8665; Type: HSDPA/UMTS/GPRS/GSM/EDGE Mobile Phone with Bluetooth;; Serial: SAR2

Communication System: HW-UMTS-FDD(WCDMA); Frequency: 826.4 MHz

Medium parameters used (interpolated): $f = 826.4$ MHz; $\sigma = 0.972$ mho/m; $\epsilon_r = 54.863$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3578; ConvF(8.45, 8.45, 8.45); Calibrated: 6/21/2011
- Sensor-Surface: 4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE4 Sn852; Calibrated: 11/16/2011
- Phantom: SAM3; Type: SAM; Serial: TP-1597
- DASY52 52.8.0(692); SEMCAD X 14.6.4(4989)

Configuration/Body/Area Scan (8x11x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 1.018 mW/g

Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm


Reference Value = 32.053 V/m; Power Drift = -0.01 dB

Peak SAR (extrapolated) = 1.3170

SAR(1 g) = 0.992 mW/g; SAR(10 g) = 0.719 mW/g

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 1.046 mW/g

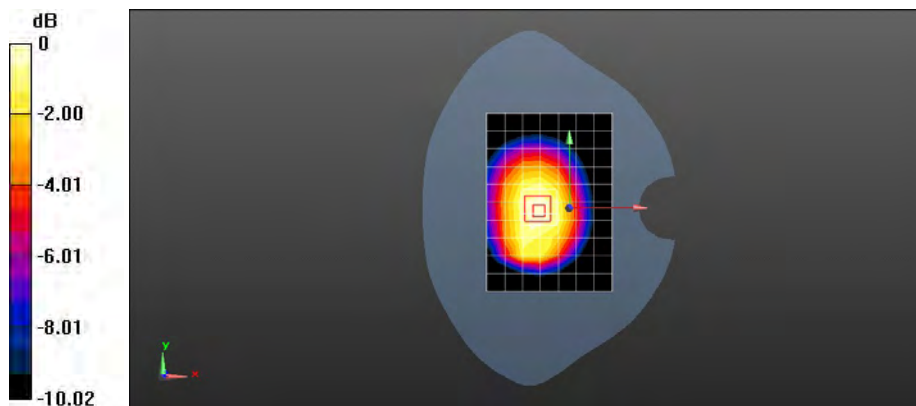

0 dB = 1.050mW/g = 0.42 dB mW/g



Test Laboratory: HUAWEI SAR Lab

U8665 WCDMA850 4132CH Towards Ground 10mm with battery SN-MHCBB066I44E1903

DUT: U8665; Type: HSDPA/UMTS/GPRS/GSM/EDGE Mobile Phone with Bluetooth;; Serial: SAR2

Communication System: HW-UMTS-FDD(WCDMA); Frequency: 826.4 MHz

Medium parameters used (interpolated): $f = 826.4$ MHz; $\sigma = 0.972$ mho/m; $\epsilon_r = 54.863$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3578; ConvF(8.45, 8.45, 8.45); Calibrated: 6/21/2011
- Sensor-Surface: 4mm (Mechanical Surface Detection), $z = 1.0$, 31.0
- Electronics: DAE4 Sn852; Calibrated: 11/16/2011
- Phantom: SAM3; Type: SAM; Serial: TP-1597
- DASY52 52.8.0(692); SEMCAD X 14.6.4(4989)

Configuration/Body/Area Scan (8x11x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.994 mW/g

Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm


Reference Value = 31.722 V/m; Power Drift = -0.0041 dB

Peak SAR (extrapolated) = 1.3020

SAR(1 g) = 0.983 mW/g; SAR(10 g) = 0.712 mW/g

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 1.041 mW/g

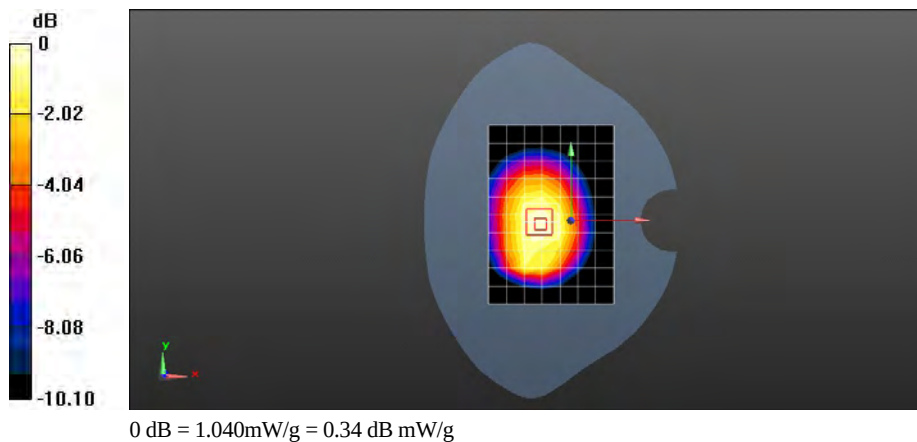

Test Laboratory: HUAWEI SAR Lab

U8665 WCDMA850 4182CH Towards Phantom 15mm

DUT: U8665; Type: HSDPA/UMTS/GPRS/GSM/EDGE Mobile Phone with Bluetooth;; Serial: SAR2

Communication System: HW-UMTS-FDD(WCDMA); Frequency: 836.4 MHz

Medium parameters used (interpolated): $f = 836.4$ MHz; $\sigma = 0.982$ mho/m; $\epsilon_r = 54.782$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3578; ConvF(8.45, 8.45, 8.45); Calibrated: 6/21/2011
- Sensor-Surface: 4mm (Mechanical Surface Detection), $z = 1.0$, 31.0
- Electronics: DAE4 Sn852; Calibrated: 11/16/2011
- Phantom: SAM3; Type: SAM; Serial: TP-1597
- DASY52 52.8.0(692); SEMCAD X 14.6.4(4989)

Configuration/Body/Area Scan (8x11x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.460 mW/g

Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm


Reference Value = 21.253 V/m; Power Drift = -0.0086 dB

Peak SAR (extrapolated) = 0.5730

SAR(1 g) = 0.449 mW/g; SAR(10 g) = 0.338 mW/g

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.471 mW/g

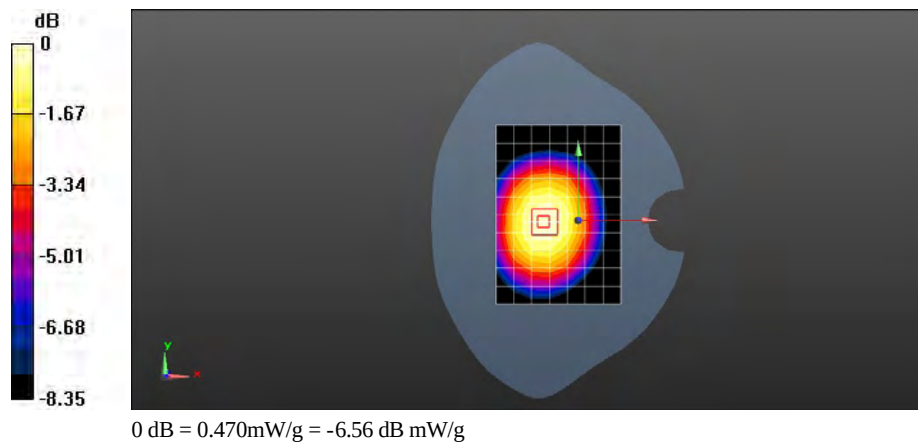

Test Laboratory: HUAWEI SAR Lab

U8665 WCDMA850 4182CH Towards Ground 15mm

DUT: U8665; Type: HSDPA/UMTS/GPRS/GSM/EDGE Mobile Phone with Bluetooth;; Serial: SAR2

Communication System: HW-UMTS-FDD(WCDMA); Frequency: 836.4 MHz

Medium parameters used (interpolated): $f = 836.4$ MHz; $\sigma = 0.982$ mho/m; $\epsilon_r = 54.782$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3578; ConvF(8.45, 8.45, 8.45); Calibrated: 6/21/2011
- Sensor-Surface: 4mm (Mechanical Surface Detection), $z = 1.0$, 31.0
- Electronics: DAE4 Sn852; Calibrated: 11/16/2011
- Phantom: SAM3; Type: SAM; Serial: TP-1597
- DASY52 52.8.0(692); SEMCAD X 14.6.4(4989)

Configuration/Body/Area Scan (8x11x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.717 mW/g

Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm


Reference Value = 26.989 V/m; Power Drift = 0.03 dB

Peak SAR (extrapolated) = 0.9200

SAR(1 g) = 0.697 mW/g; SAR(10 g) = 0.507 mW/g

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.735 mW/g

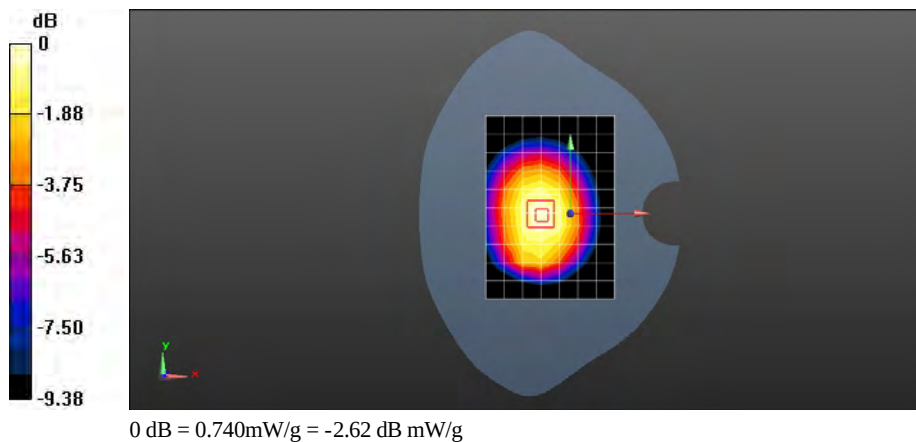

Test Laboratory: HUAWEI SAR Lab

U8665 WCDMA850 4182CH Towards Ground 15mm with HSDPA

DUT: U8665; Type: HSDPA/UMTS/GPRS/GSM/EDGE Mobile Phone with Bluetooth;; Serial: SAR2

Communication System: HW-UMTS-FDD(WCDMA); Frequency: 836.4 MHz

Medium parameters used (interpolated): $f = 836.4$ MHz; $\sigma = 0.982$ mho/m; $\epsilon_r = 54.782$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3578; ConvF(8.45, 8.45, 8.45); Calibrated: 6/21/2011
- Sensor-Surface: 4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE4 Sn852; Calibrated: 11/16/2011
- Phantom: SAM3; Type: SAM; Serial: TP-1597
- DASY52 52.8.0(692); SEMCAD X 14.6.4(4989)

Configuration/Body/Area Scan (8x11x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.623 mW/g

Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm


Reference Value = 23.536 V/m; Power Drift = 0.04 dB

Peak SAR (extrapolated) = 0.8150

SAR(1 g) = 0.611 mW/g; SAR(10 g) = 0.444 mW/g

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.647 mW/g

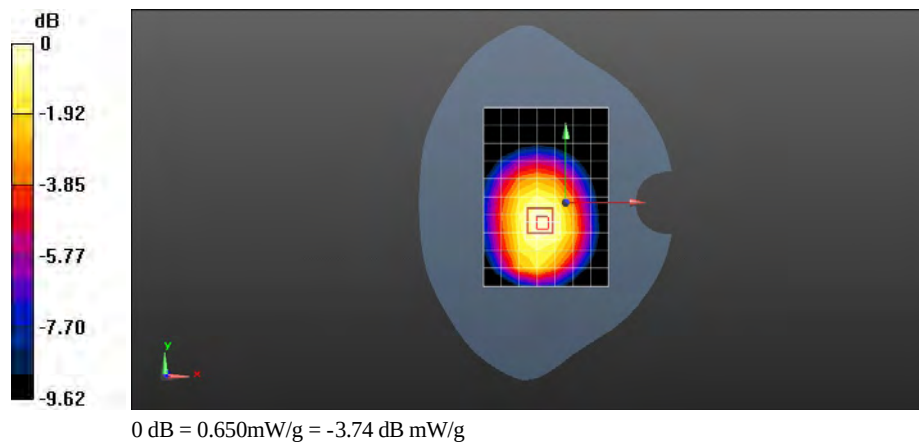

Test Laboratory: HUAWEI SAR Lab

U8665 WCDMA850 4182CH Towards Ground 15mm with headset

DUT: U8665; Type: HSDPA/UMTS/GPRS/GSM/EDGE Mobile Phone with Bluetooth;; Serial: SAR2

Communication System: HW-UMTS-FDD(WCDMA); Frequency: 836.4 MHz

Medium parameters used (interpolated): $f = 836.4$ MHz; $\sigma = 0.982$ mho/m; $\epsilon_r = 54.782$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3578; ConvF(8.45, 8.45, 8.45); Calibrated: 6/21/2011
- Sensor-Surface: 4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE4 Sn852; Calibrated: 11/16/2011
- Phantom: SAM3; Type: SAM; Serial: TP-1597
- DASY52 52.8.0(692); SEMCAD X 14.6.4(4989)

Configuration/Body/Area Scan (8x11x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.476 mW/g

Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 20.348 V/m; Power Drift = 0.04 dB

Peak SAR (extrapolated) = 0.6410

SAR(1 g) = 0.430 mW/g; SAR(10 g) = 0.288 mW/g

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.467 mW/g

Configuration/Body/Zoom Scan (7x7x7)/Cube 1: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm


Reference Value = 20.348 V/m; Power Drift = 0.04 dB

Peak SAR (extrapolated) = 0.5840

SAR(1 g) = 0.437 mW/g; SAR(10 g) = 0.317 mW/g

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.460 mW/g

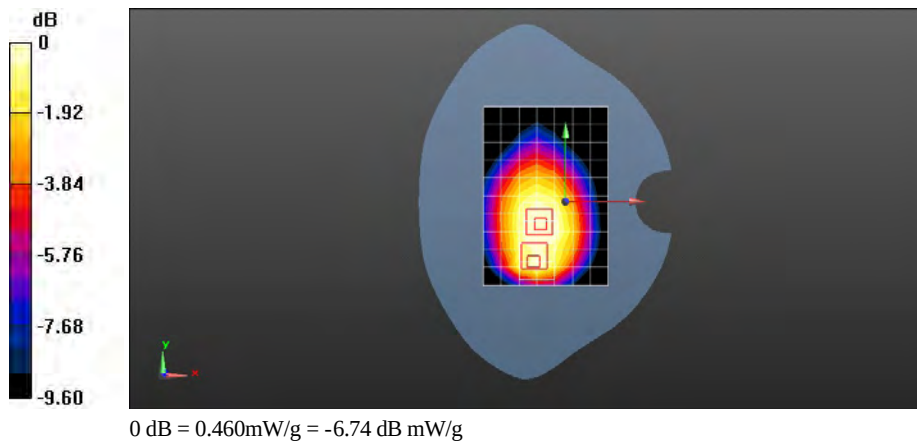

Test Laboratory: HUAWEI SAR Lab

U8665 WCDMA850 4182CH Towards Ground 15mm with battery SN-UAIBC20X03007197

DUT: U8665; Type: HSDPA/UMTS/GPRS/GSM/EDGE Mobile Phone with Bluetooth;; Serial: SAR2

Communication System: HW-UMTS-FDD(WCDMA); Frequency: 836.4 MHz

Medium parameters used (interpolated): $f = 836.4$ MHz; $\sigma = 0.982$ mho/m; $\epsilon_r = 54.782$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3578; ConvF(8.45, 8.45, 8.45); Calibrated: 6/21/2011
- Sensor-Surface: 4mm (Mechanical Surface Detection), $z = 1.0$, 31.0
- Electronics: DAE4 Sn852; Calibrated: 11/16/2011
- Phantom: SAM3; Type: SAM; Serial: TP-1597
- DASY52 52.8.0(692); SEMCAD X 14.6.4(4989)

Configuration/Body/Area Scan (8x11x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.712 mW/g

Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm


Reference Value = 25.821 V/m; Power Drift = -0.01 dB

Peak SAR (extrapolated) = 0.9120

SAR(1 g) = 0.689 mW/g; SAR(10 g) = 0.501 mW/g

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.727 mW/g

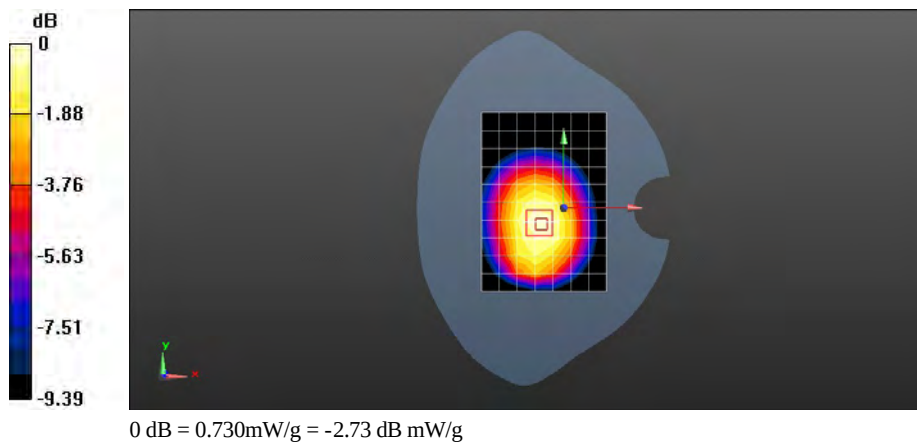

Test Laboratory: HUAWEI SAR Lab

U8665 WCDMA850 4182CH Towards Ground 15mm with battery SN-UNDC306X03000317

DUT: U8665; Type: HSDPA/UMTS/GPRS/GSM/EDGE Mobile Phone with Bluetooth;; Serial: SAR2

Communication System: HW-UMTS-FDD(WCDMA); Frequency: 836.4 MHz

Medium parameters used (interpolated): $f = 836.4$ MHz; $\sigma = 0.982$ mho/m; $\epsilon_r = 54.782$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3578; ConvF(8.45, 8.45, 8.45); Calibrated: 6/21/2011
- Sensor-Surface: 4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE4 Sn852; Calibrated: 11/16/2011
- Phantom: SAM3; Type: SAM; Serial: TP-1597
- DASY52 52.8.0(692); SEMCAD X 14.6.4(4989)

Configuration/Body/Area Scan (8x11x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.713 mW/g

Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm


Reference Value = 25.549 V/m; Power Drift = 0.05 dB

Peak SAR (extrapolated) = 0.9300

SAR(1 g) = 0.702 mW/g; SAR(10 g) = 0.510 mW/g

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.744 mW/g

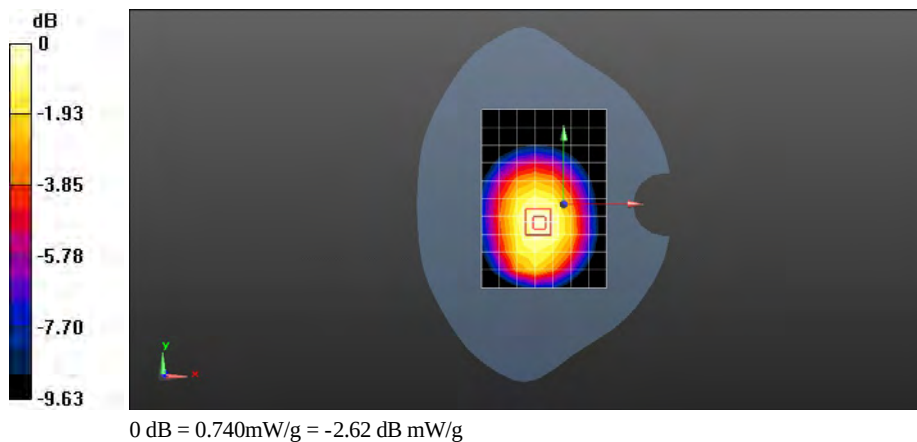

Test Laboratory: HUAWEI SAR Lab

U8665 WCDMA850 4182CH Towards Ground 15mm with battery SN-MHCBB066I44E1903

DUT: U8665; Type: HSDPA/UMTS/GPRS/GSM/EDGE Mobile Phone with Bluetooth;; Serial: SAR2

Communication System: HW-UMTS-FDD(WCDMA); Frequency: 836.4 MHz

Medium parameters used (interpolated): $f = 836.4$ MHz; $\sigma = 0.982$ mho/m; $\epsilon_r = 54.782$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3578; ConvF(8.45, 8.45, 8.45); Calibrated: 6/21/2011
- Sensor-Surface: 4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE4 Sn852; Calibrated: 11/16/2011
- Phantom: SAM3; Type: SAM; Serial: TP-1597
- DASY52 52.8.0(692); SEMCAD X 14.6.4(4989)

Configuration/Body/Area Scan (8x11x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.742 mW/g

Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm


Reference Value = 27.165 V/m; Power Drift = 0.03 dB

Peak SAR (extrapolated) = 0.9490

SAR(1 g) = 0.717 mW/g; SAR(10 g) = 0.522 mW/g

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.755 mW/g

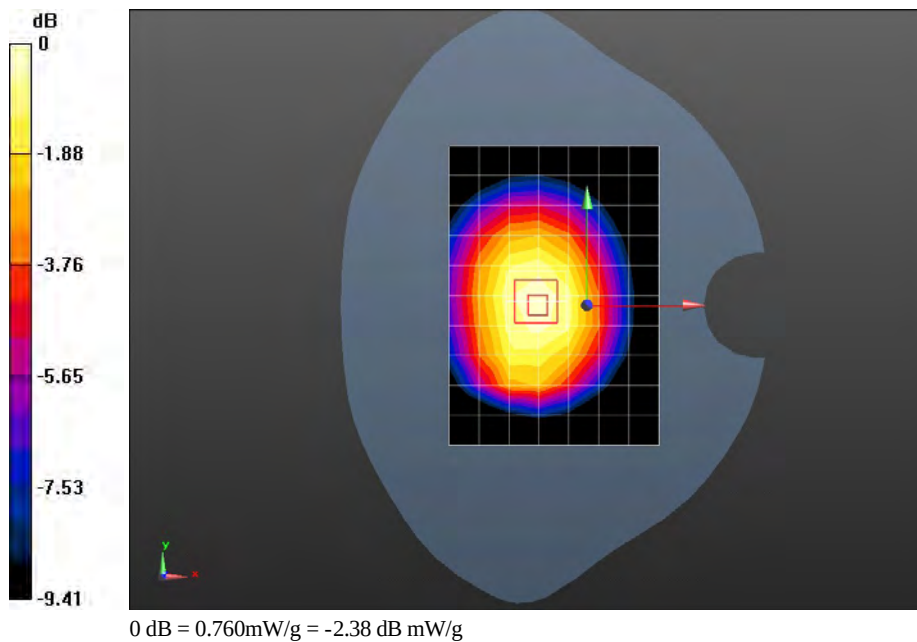

Test Laboratory: HUAWEI SAR Lab

U8665 WCDMA1900 9538CH Left hand touch cheek

DUT: U8665; Type: HSDPA/UMTS/GPRS/GSM/EDGE Mobile Phone with Bluetooth;; Serial: SAR2

Communication System: HW-UMTS-FDD(WCDMA); Frequency: 1907.6 MHz

Medium parameters used: $f = 1908$ MHz; $\sigma = 1.435$ mho/m; $\epsilon_r = 39.194$; $\rho = 1000$ kg/m³

Phantom section: Left Section

DASY Configuration:

- Probe: EX3DV4 - SN3578; ConvF(7.26, 7.26, 7.26); Calibrated: 6/21/2011
- Sensor-Surface: 4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE4 Sn852; Calibrated: 11/16/2011
- Phantom: SAM3; Type: SAM; Serial: TP-1597
- DASY52 52.8.0(692); SEMCAD X 14.6.4(4989)

Configuration/Head/Area Scan (8x12x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 1.031 mW/g


Configuration/Head/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 13.152 V/m; Power Drift = -0.12 dB

Peak SAR (extrapolated) = 1.8540

SAR(1 g) = 1.07 mW/g; SAR(10 g) = 0.624 mW/g

Maximum value of SAR (measured) = 1.182 mW/g

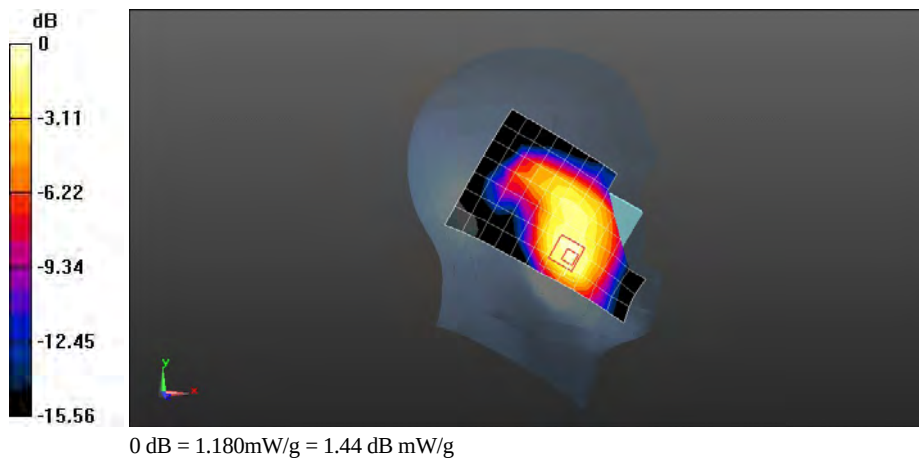

Test Laboratory: HUAWEI SAR Lab

U8665 WCDMA1900 9400CH Left hand touch cheek

DUT: U8665; Type: HSDPA/UMTS/GPRS/GSM/EDGE Mobile Phone with Bluetooth;; Serial: SAR2

Communication System: HW-UMTS-FDD(WCDMA); Frequency: 1880 MHz

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.415$ mho/m; $\epsilon_r = 39.425$; $\rho = 1000$ kg/m³

Phantom section: Left Section

DASY Configuration:

- Probe: EX3DV4 - SN3578; ConvF(7.26, 7.26, 7.26); Calibrated: 6/21/2011
- Sensor-Surface: 4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE4 Sn852; Calibrated: 11/16/2011
- Phantom: SAM3; Type: SAM; Serial: TP-1597
- DASY52 52.8.0(692); SEMCAD X 14.6.4(4989)

Configuration/Head/Area Scan (8x12x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 1.047 mW/g


Configuration/Head/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 13.428 V/m; Power Drift = -0.10 dB

Peak SAR (extrapolated) = 1.8600

SAR(1 g) = 1.08 mW/g; SAR(10 g) = 0.634 mW/g

Maximum value of SAR (measured) = 1.200 mW/g

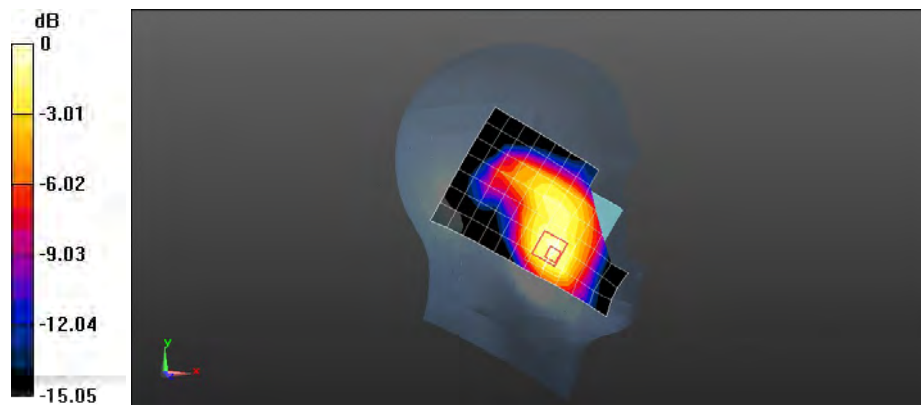

0 dB = 1.200mW/g = 1.58 dB mW/g

Test Laboratory: HUAWEI SAR Lab

U8665 WCDMA1900 9262CH Left hand touch cheek

DUT: U8665; Type: HSDPA/UMTS/GPRS/GSM/EDGE Mobile Phone with Bluetooth;; Serial: SAR2

Communication System: HW-UMTS-FDD(WCDMA); Frequency: 1852.4 MHz

Medium parameters used (interpolated): $f = 1852.4$ MHz; $\sigma = 1.393$ mho/m; $\epsilon_r = 39.648$; $\rho = 1000$ kg/m³

Phantom section: Left Section

DASY Configuration:

- Probe: EX3DV4 - SN3578; ConvF(7.26, 7.26, 7.26); Calibrated: 6/21/2011
- Sensor-Surface: 4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE4 Sn852; Calibrated: 11/16/2011
- Phantom: SAM3; Type: SAM; Serial: TP-1597
- DASY52 52.8.0(692); SEMCAD X 14.6.4(4989)

Configuration/Head/Area Scan (8x12x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 1.158 mW/g

Configuration/Head/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm


Reference Value = 14.285 V/m; Power Drift = -0.05 dB

Peak SAR (extrapolated) = 2.0390

SAR(1 g) = 1.2 mW/g; SAR(10 g) = 0.699 mW/g

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 1.317 mW/g

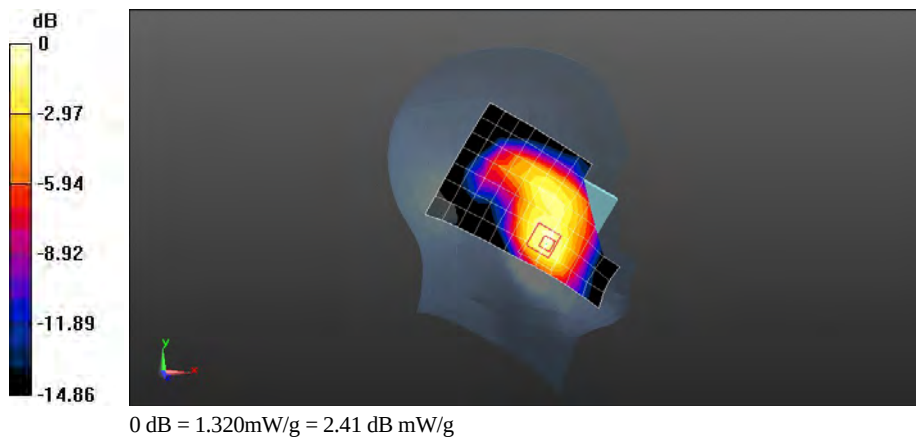

Test Laboratory: HUAWEI SAR Lab

U8665 WCDMA1900 9400CH Left hand tilt 15 degree

DUT: U8665; Type: HSDPA/UMTS/GPRS/GSM/EDGE Mobile Phone with Bluetooth;; Serial: SAR2

Communication System: HW-UMTS-FDD(WCDMA); Frequency: 1880 MHz

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.415$ mho/m; $\epsilon_r = 39.425$; $\rho = 1000$ kg/m³

Phantom section: Left Section

DASY Configuration:

- Probe: EX3DV4 - SN3578; ConvF(7.26, 7.26, 7.26); Calibrated: 6/21/2011
- Sensor-Surface: 4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE4 Sn852; Calibrated: 11/16/2011
- Phantom: SAM3; Type: SAM; Serial: TP-1597
- DASY52 52.8.0(692); SEMCAD X 14.6.4(4989)

Configuration/Head/Area Scan (8x12x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 0.557 mW/g


Configuration/Head/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 18.935 V/m; Power Drift = 0.06 dB

Peak SAR (extrapolated) = 0.7730

SAR(1 g) = 0.514 mW/g; SAR(10 g) = 0.311 mW/g

Maximum value of SAR (measured) = 0.558 mW/g

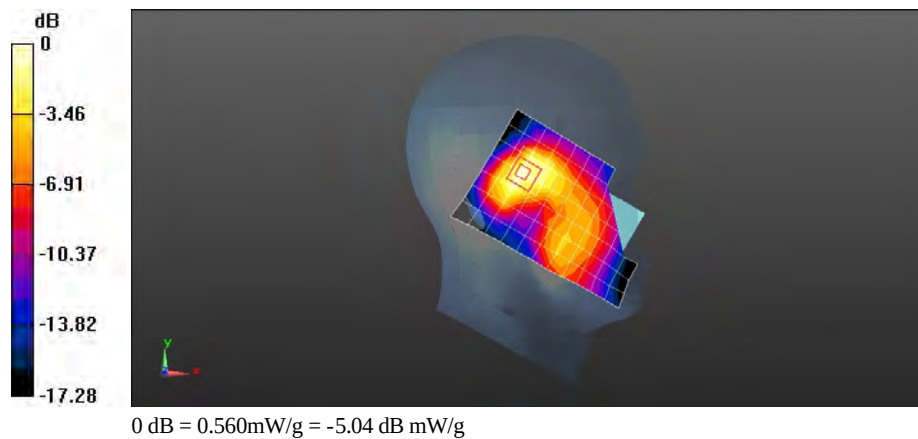

Test Laboratory: HUAWEI SAR Lab

U8665 WCDMA1900 9538CH Right hand touch cheek

DUT: U8665; Type: HSDPA/UMTS/GPRS/GSM/EDGE Mobile Phone with Bluetooth;; Serial: SAR2

Communication System: HW-UMTS-FDD(WCDMA); Frequency: 1907.6 MHz

Medium parameters used: $f = 1908$ MHz; $\sigma = 1.435$ mho/m; $\epsilon_r = 39.194$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY Configuration:

- Probe: EX3DV4 - SN3578; ConvF(7.26, 7.26, 7.26); Calibrated: 6/21/2011
- Sensor-Surface: 4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE4 Sn852; Calibrated: 11/16/2011
- Phantom: SAM3; Type: SAM; Serial: TP-1597
- DASY52 52.8.0(692); SEMCAD X 14.6.4(4989)

Configuration/Head/Area Scan (8x12x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 1.210 mW/g


Configuration/Head/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 11.506 V/m; Power Drift = 0.05 dB

Peak SAR (extrapolated) = 1.6900

SAR(1 g) = 1.1 mW/g; SAR(10 g) = 0.692 mW/g

Maximum value of SAR (measured) = 1.175 mW/g

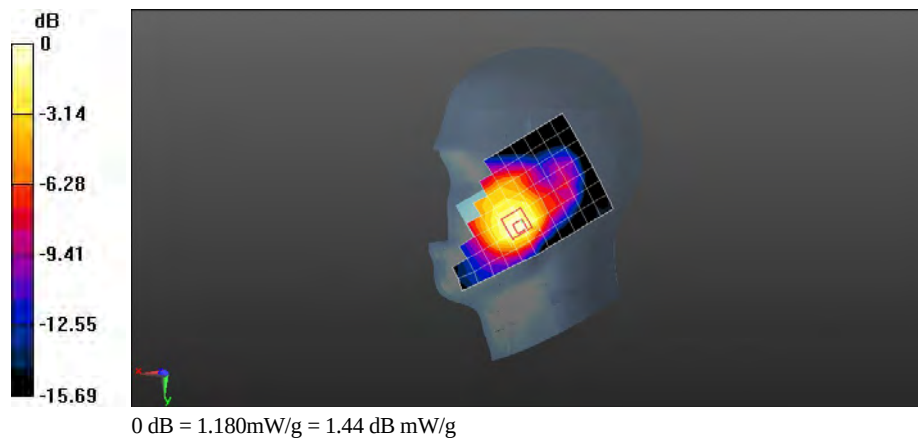

Test Laboratory: HUAWEI SAR Lab

U8665 WCDMA1900 9400CH Right hand touch cheek

DUT: U8665; Type: HSDPA/UMTS/GPRS/GSM/EDGE Mobile Phone with Bluetooth;; Serial: SAR2

Communication System: HW-UMTS-FDD(WCDMA); Frequency: 1880 MHz

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.415$ mho/m; $\epsilon_r = 39.425$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY Configuration:

- Probe: EX3DV4 - SN3578; ConvF(7.26, 7.26, 7.26); Calibrated: 6/21/2011
- Sensor-Surface: 4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE4 Sn852; Calibrated: 11/16/2011
- Phantom: SAM3; Type: SAM; Serial: TP-1597
- DASY52 52.8.0(692); SEMCAD X 14.6.4(4989)

Configuration/Head/Area Scan (8x12x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 1.286 mW/g


Configuration/Head/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 12.232 V/m; Power Drift = 0.09 dB

Peak SAR (extrapolated) = 1.8200

SAR(1 g) = 1.17 mW/g; SAR(10 g) = 0.731 mW/g

Maximum value of SAR (measured) = 1.258 mW/g

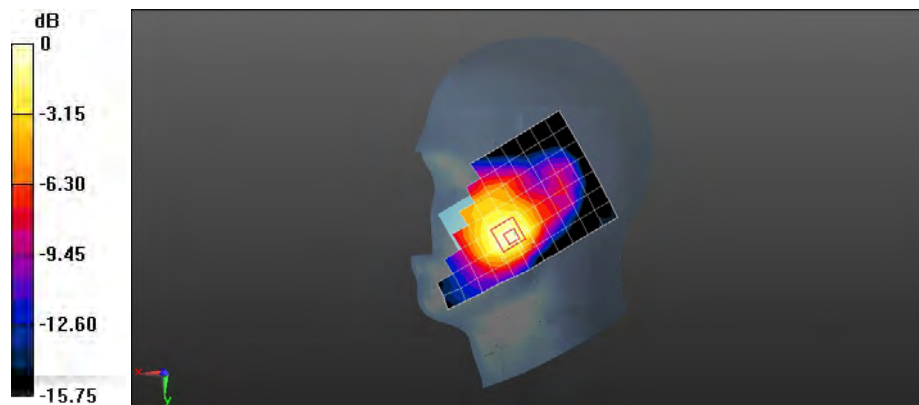

0 dB = 1.260mW/g = 2.01 dB mW/g

Test Laboratory: HUAWEI SAR Lab

U8665 WCDMA1900 9262CH Right hand touch cheek

DUT: U8665; Type: HSDPA/UMTS/GPRS/GSM/EDGE Mobile Phone with Bluetooth;; Serial: SAR2

Communication System: HW-UMTS-FDD(WCDMA); Frequency: 1852.4 MHz

Medium parameters used (interpolated): $f = 1852.4$ MHz; $\sigma = 1.393$ mho/m; $\epsilon_r = 39.648$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY Configuration:

- Probe: EX3DV4 - SN3578; ConvF(7.26, 7.26, 7.26); Calibrated: 6/21/2011
- Sensor-Surface: 4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE4 Sn852; Calibrated: 11/16/2011
- Phantom: SAM3; Type: SAM; Serial: TP-1597
- DASY52 52.8.0(692); SEMCAD X 14.6.4(4989)

Configuration/Head/Area Scan (8x12x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 1.360 mW/g

Configuration/Head/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm


Reference Value = 13.373 V/m; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 1.9160

SAR(1 g) = 1.25 mW/g; SAR(10 g) = 0.784 mW/g

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 1.334 mW/g

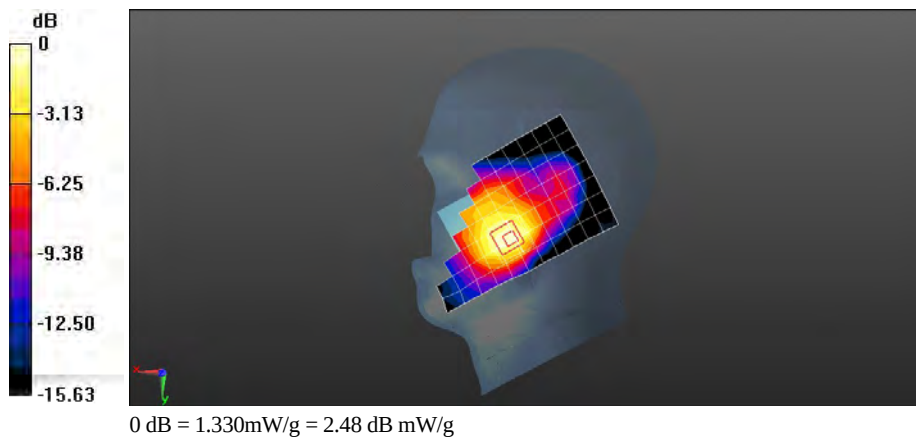

Test Laboratory: HUAWEI SAR Lab

U8665 WCDMA1900 9400CH Right hand tilt 15 degree

DUT: U8665; Type: HSDPA/UMTS/GPRS/GSM/EDGE Mobile Phone with Bluetooth;; Serial: SAR2

Communication System: HW-UMTS-FDD(WCDMA); Frequency: 1880 MHz

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.415$ mho/m; $\epsilon_r = 39.425$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY Configuration:

- Probe: EX3DV4 - SN3578; ConvF(7.26, 7.26, 7.26); Calibrated: 6/21/2011
- Sensor-Surface: 4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE4 Sn852; Calibrated: 11/16/2011
- Phantom: SAM3; Type: SAM; Serial: TP-1597
- DASY52 52.8.0(692); SEMCAD X 14.6.4(4989)

Configuration/Head/Area Scan (8x12x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 0.437 mW/g


Configuration/Head/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 17.985 V/m; Power Drift = 0.03 dB

Peak SAR (extrapolated) = 0.7970

SAR(1 g) = 0.479 mW/g; SAR(10 g) = 0.269 mW/g

Maximum value of SAR (measured) = 0.536 mW/g

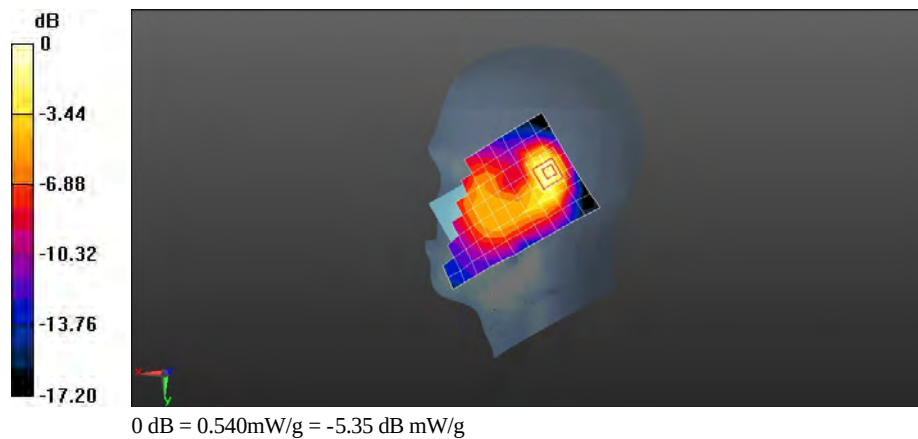

Test Laboratory: HUAWEI SAR Lab

U8665 WCDMA1900 9262CH Right hand touch cheek with battery SN-UAIBC20X03007197

DUT: U8665; Type: HSDPA/UMTS/GPRS/GSM/EDGE Mobile Phone with Bluetooth;; Serial: SAR2

Communication System: HW-UMTS-FDD(WCDMA); Frequency: 1852.4 MHz

Medium parameters used (interpolated): $f = 1852.4$ MHz; $\sigma = 1.393$ mho/m; $\epsilon_r = 39.648$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY Configuration:

- Probe: EX3DV4 - SN3578; ConvF(7.26, 7.26, 7.26); Calibrated: 6/21/2011
- Sensor-Surface: 4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE4 Sn852; Calibrated: 11/16/2011
- Phantom: SAM3; Type: SAM; Serial: TP-1597
- DASY52 52.8.0(692); SEMCAD X 14.6.4(4989)

Configuration/Head/Area Scan (8x12x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 1.369 mW/g

Configuration/Head/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm



Reference Value = 13.621 V/m; Power Drift = 0.10 dB

Peak SAR (extrapolated) = 1.9240

SAR(1 g) = 1.26 mW/g; SAR(10 g) = 0.793 mW/g

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 1.339 mW/g

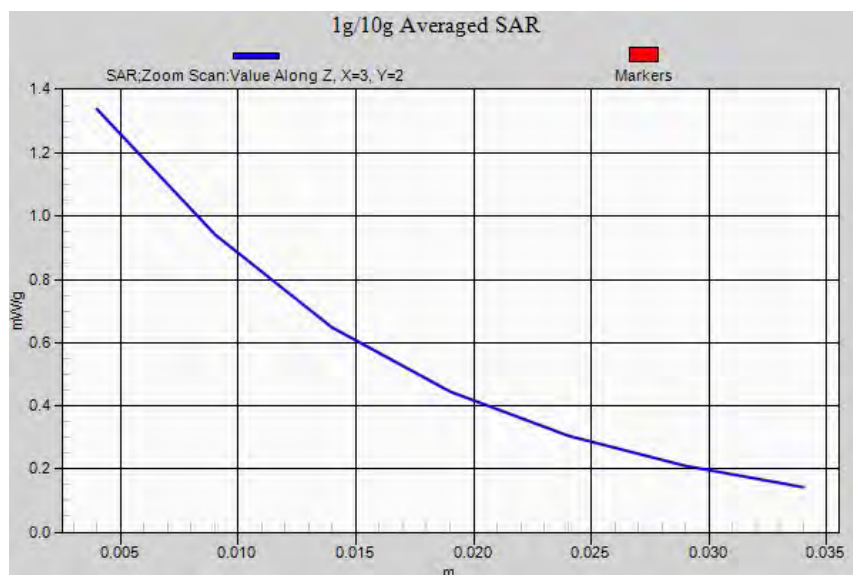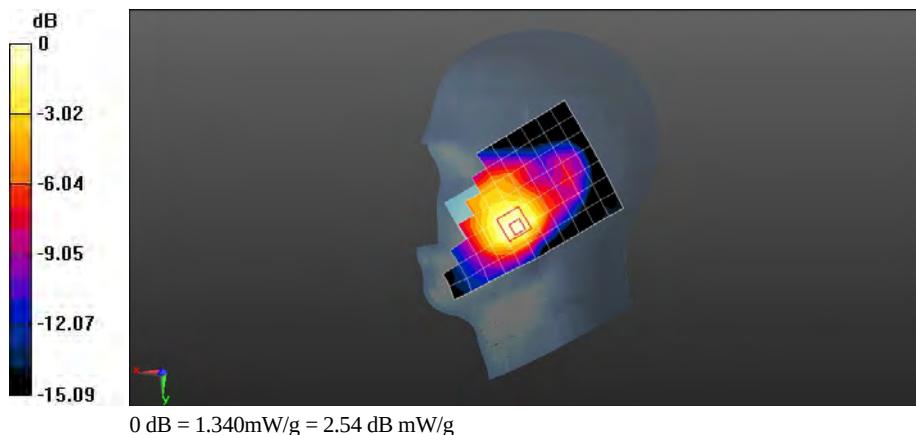

Test Laboratory: HUAWEI SAR Lab

U8665 WCDMA1900 9262CH Right hand touch cheek with battery SN-UNDC306X03000317

DUT: U8665; Type: HSDPA/UMTS/GPRS/GSM/EDGE Mobile Phone with Bluetooth;; Serial: SAR2

Communication System: HW-UMTS-FDD(WCDMA); Frequency: 1852.4 MHz

Medium parameters used (interpolated): $f = 1852.4$ MHz; $\sigma = 1.393$ mho/m; $\epsilon_r = 39.648$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY Configuration:

- Probe: EX3DV4 - SN3578; ConvF(7.26, 7.26, 7.26); Calibrated: 6/21/2011
- Sensor-Surface: 4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE4 Sn852; Calibrated: 11/16/2011
- Phantom: SAM3; Type: SAM; Serial: TP-1597
- DASY52 52.8.0(692); SEMCAD X 14.6.4(4989)

Configuration/Head/Area Scan (8x12x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 1.363 mW/g

Configuration/Head/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm


Reference Value = 13.653 V/m; Power Drift = 0.05 dB

Peak SAR (extrapolated) = 1.9020

SAR(1 g) = 1.24 mW/g; SAR(10 g) = 0.786 mW/g

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 1.323 mW/g

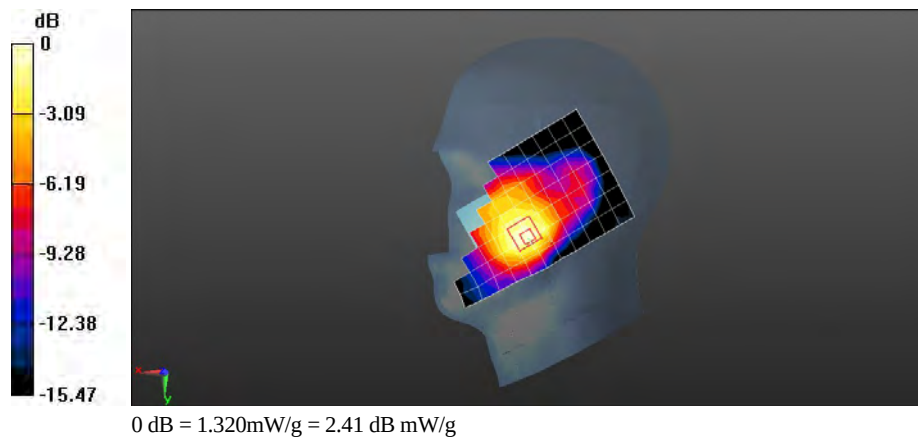

Test Laboratory: HUAWEI SAR Lab

U8665 WCDMA1900 9262CH Right hand touch cheek with battery SN-MHCBB066I44E1903

DUT: U8665; Type: HSDPA/UMTS/GPRS/GSM/EDGE Mobile Phone with Bluetooth;; Serial: SAR2

Communication System: HW-UMTS-FDD(WCDMA); Frequency: 1852.4 MHz

Medium parameters used (interpolated): $f = 1852.4$ MHz; $\sigma = 1.393$ mho/m; $\epsilon_r = 39.648$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY Configuration:

- Probe: EX3DV4 - SN3578; ConvF(7.26, 7.26, 7.26); Calibrated: 6/21/2011
- Sensor-Surface: 4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE4 Sn852; Calibrated: 11/16/2011
- Phantom: SAM3; Type: SAM; Serial: TP-1597
- DASY52 52.8.0(692); SEMCAD X 14.6.4(4989)

Configuration/Head/Area Scan (8x12x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 1.344 mW/g

Configuration/Head/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm


Reference Value = 13.648 V/m; Power Drift = 0.13 dB

Peak SAR (extrapolated) = 1.8930

SAR(1 g) = 1.23 mW/g; SAR(10 g) = 0.777 mW/g

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 1.328 mW/g

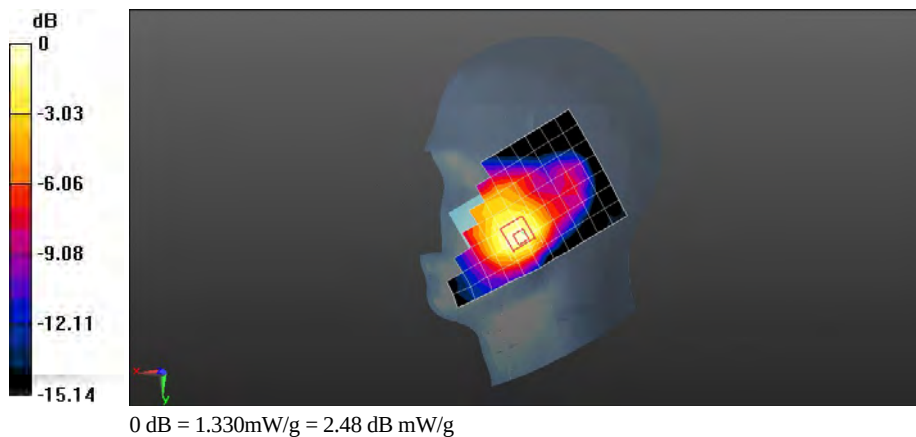

Test Laboratory: HUAWEI SAR Lab

U8665 WCDMA1900 9400CH Towards Phantom 10mm

DUT: U8665; Type: HSDPA/UMTS/GPRS/GSM/EDGE Mobile Phone with Bluetooth;; Serial: SAR2

Communication System: HW-UMTS-FDD(WCDMA); Frequency: 1880 MHz

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.516$ mho/m; $\epsilon_r = 53.356$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3578; ConvF(6.68, 6.68, 6.68); Calibrated: 6/21/2011
- Sensor-Surface: 4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE4 Sn852; Calibrated: 11/16/2011
- Phantom: SAM4; Type: SAM; Serial: TP-1620
- DASY52 52.8.0(692); SEMCAD X 14.6.4(4989)

Configuration/Body/Area Scan (8x12x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 0.836 mW/g


Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 12.241 V/m; Power Drift = 0.15 dB

Peak SAR (extrapolated) = 1.2990

SAR(1 g) = 0.781 mW/g; SAR(10 g) = 0.462 mW/g

Maximum value of SAR (measured) = 0.848 mW/g

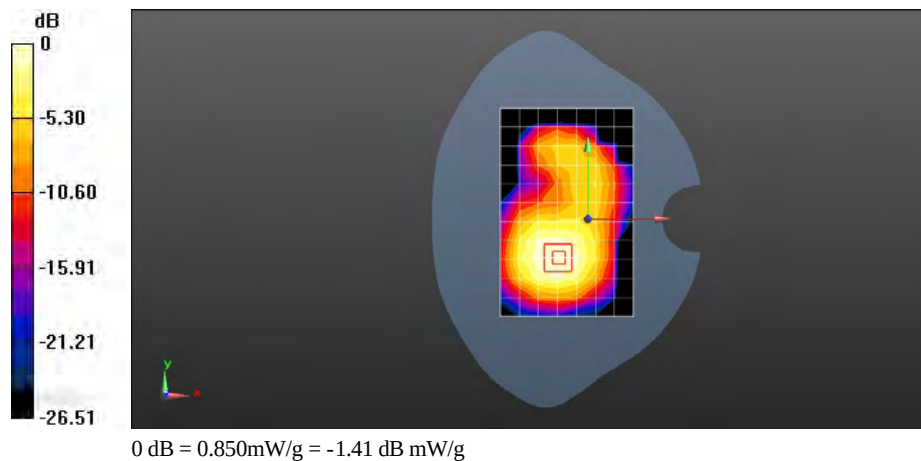

Test Laboratory: HUAWEI SAR Lab

U8665 WCDMA1900 9538CH Towards Ground 10mm

DUT: U8665; Type: HSDPA/UMTS/GPRS/GSM/EDGE Mobile Phone with Bluetooth;; Serial: SAR2

Communication System: HW-UMTS-FDD(WCDMA); Frequency: 1907.6 MHz

Medium parameters used: $f = 1908$ MHz; $\sigma = 1.535$ mho/m; $\epsilon_r = 53.174$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3578; ConvF(6.68, 6.68, 6.68); Calibrated: 6/21/2011
- Sensor-Surface: 4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE4 Sn852; Calibrated: 11/16/2011
- Phantom: SAM4; Type: SAM; Serial: TP-1620
- DASY52 52.8.0(692); SEMCAD X 14.6.4(4989)

Configuration/Body/Area Scan (8x12x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 0.931 mW/g


Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 13.464 V/m; Power Drift = 0.06 dB

Peak SAR (extrapolated) = 1.8760

SAR(1 g) = 1.06 mW/g; SAR(10 g) = 0.591 mW/g

Maximum value of SAR (measured) = 1.179 mW/g

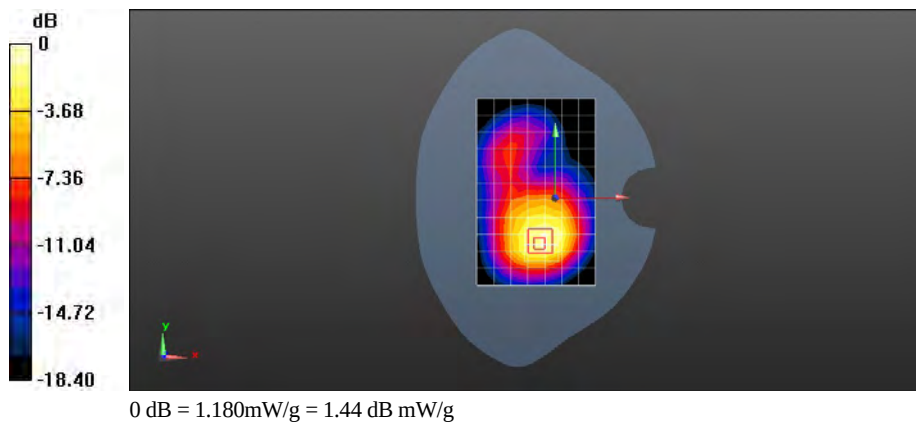

Test Laboratory: HUAWEI SAR Lab

U8665 WCDMA1900 9400CH Towards Ground 10mm

DUT: U8665; Type: HSDPA/UMTS/GPRS/GSM/EDGE Mobile Phone with Bluetooth;; Serial: SAR2

Communication System: HW-UMTS-FDD(WCDMA); Frequency: 1880 MHz

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.516$ mho/m; $\epsilon_r = 53.356$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3578; ConvF(6.68, 6.68, 6.68); Calibrated: 6/21/2011
- Sensor-Surface: 4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE4 Sn852; Calibrated: 11/16/2011
- Phantom: SAM4; Type: SAM; Serial: TP-1620
- DASY52 52.8.0(692); SEMCAD X 14.6.4(4989)

Configuration/Body/Area Scan (8x12x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 0.931 mW/g


Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 13.608 V/m; Power Drift = -0.05 dB

Peak SAR (extrapolated) = 1.8200

SAR(1 g) = 1.06 mW/g; SAR(10 g) = 0.591 mW/g

Maximum value of SAR (measured) = 1.168 mW/g

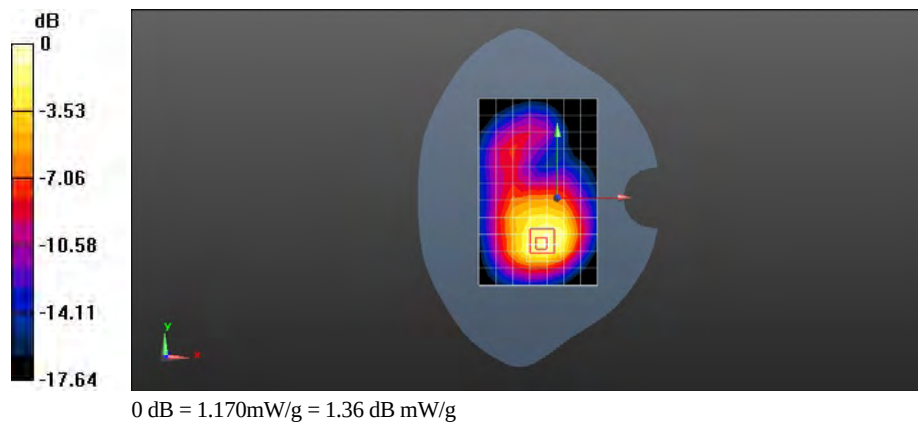

Test Laboratory: HUAWEI SAR Lab

U8665 WCDMA1900 9262CH Towards Ground 10mm

DUT: U8665; Type: HSDPA/UMTS/GPRS/GSM/EDGE Mobile Phone with Bluetooth;; Serial: SAR2

Communication System: HW-UMTS-FDD(WCDMA); Frequency: 1852.4 MHz

Medium parameters used (interpolated): $f = 1852.4$ MHz; $\sigma = 1.474$ mho/m; $\epsilon_r = 53.29$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3578; ConvF(6.68, 6.68, 6.68); Calibrated: 6/21/2011
- Sensor-Surface: 4mm (Mechanical Surface Detection), $z = 1.0$, 31.0
- Electronics: DAE4 Sn852; Calibrated: 11/16/2011
- Phantom: SAM4; Type: SAM; Serial: TP-1620
- DASY52 52.8.0(692); SEMCAD X 14.6.4(4989)

Configuration/Body/Area Scan (8x12x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.965 mW/g

Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm


Reference Value = 14.661 V/m; Power Drift = -0.0027 dB

Peak SAR (extrapolated) = 1.9310

SAR(1 g) = 1.13 mW/g; SAR(10 g) = 0.635 mW/g

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 1.251 mW/g

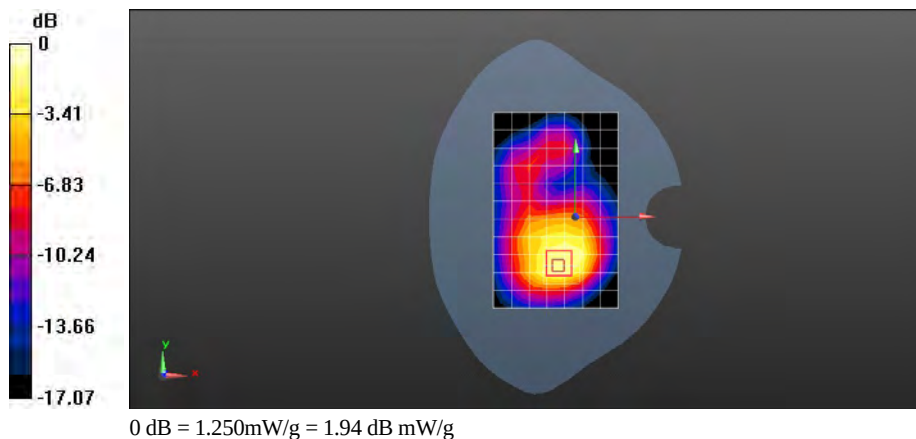

Test Laboratory: HUAWEI SAR Lab

U8665 WCDMA1900 9400CH Left edge 10mm

DUT: U8665; Type: HSDPA/UMTS/GPRS/GSM/EDGE Mobile Phone with Bluetooth;; Serial: SAR2

Communication System: HW-UMTS-FDD(WCDMA); Frequency: 1880 MHz

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.516$ mho/m; $\epsilon_r = 53.356$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3578; ConvF(6.68, 6.68, 6.68); Calibrated: 6/21/2011
- Sensor-Surface: 4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE4 Sn852; Calibrated: 11/16/2011
- Phantom: SAM4; Type: SAM; Serial: TP-1620
- DASY52 52.8.0(692); SEMCAD X 14.6.4(4989)

Configuration/Body/Area Scan (8x12x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 0.381 mW/g


Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 11.609 V/m; Power Drift = 0.15 dB

Peak SAR (extrapolated) = 0.6560

SAR(1 g) = 0.373 mW/g; SAR(10 g) = 0.200 mW/g

Maximum value of SAR (measured) = 0.415 mW/g

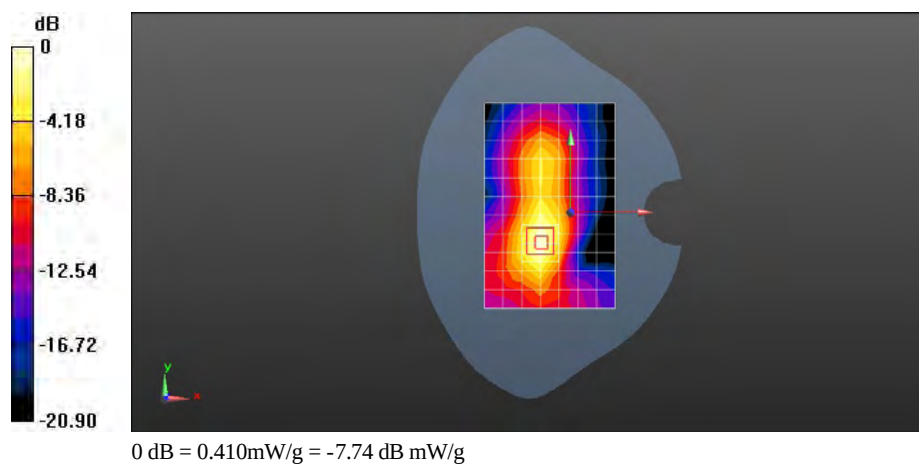

Test Laboratory: HUAWEI SAR Lab

U8665 WCDMA1900 9400CH Right edge 10mm

DUT: U8665; Type: HSDPA/UMTS/GPRS/GSM/EDGE Mobile Phone with Bluetooth;; Serial: SAR2

Communication System: HW-UMTS-FDD(WCDMA); Frequency: 1880 MHz

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.516$ mho/m; $\epsilon_r = 53.356$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3578; ConvF(6.68, 6.68, 6.68); Calibrated: 6/21/2011
- Sensor-Surface: 4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE4 Sn852; Calibrated: 11/16/2011
- Phantom: SAM4; Type: SAM; Serial: TP-1620
- DASY52 52.8.0(692); SEMCAD X 14.6.4(4989)

Configuration/Body/Area Scan (8x12x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 0.207 mW/g

Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 7.154 V/m; Power Drift = 0.13 dB

Peak SAR (extrapolated) = 0.3350

SAR(1 g) = 0.201 mW/g; SAR(10 g) = 0.115 mW/g

Maximum value of SAR (measured) = 0.222 mW/g


Configuration/Body/Zoom Scan (7x7x7)/Cube 1: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 7.154 V/m; Power Drift = 0.13 dB

Peak SAR (extrapolated) = 0.2800

SAR(1 g) = 0.166 mW/g; SAR(10 g) = 0.097 mW/g

Maximum value of SAR (measured) = 0.180 mW/g

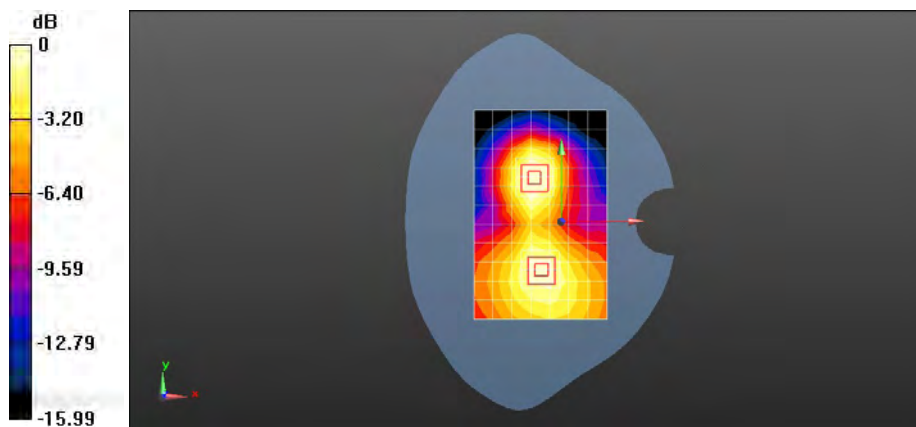

0 dB = 0.180mW/g = -14.89 dB mW/g

Test Laboratory: HUAWEI SAR Lab

U8665 WCDMA1900 9538CH Bottom edge 10mm

DUT: U8665; Type: HSDPA/UMTS/GPRS/GSM/EDGE Mobile Phone with Bluetooth;; Serial: SAR2

Communication System: HW-UMTS-FDD(WCDMA); Frequency: 1907.6 MHz

Medium parameters used: $f = 1908 \text{ MHz}$; $\sigma = 1.535 \text{ mho/m}$; $\epsilon_r = 53.174$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3578; ConvF(6.68, 6.68, 6.68); Calibrated: 6/21/2011
- Sensor-Surface: 4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE4 Sn852; Calibrated: 11/16/2011
- Phantom: SAM4; Type: SAM; Serial: TP-1620
- DASY52 52.8.0(692); SEMCAD X 14.6.4(4989)

Configuration/Body/Area Scan (8x12x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (measured) = 0.940 mW/g


Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$

Reference Value = 22.208 V/m ; Power Drift = 0.12 dB

Peak SAR (extrapolated) = 1.5760

SAR(1 g) = 0.908 mW/g ; SAR(10 g) = 0.502 mW/g

Maximum value of SAR (measured) = 1.003 mW/g

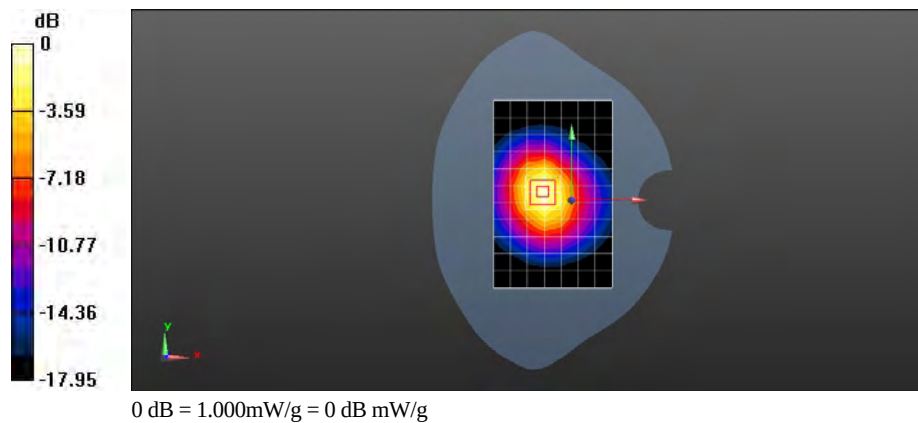

Test Laboratory: HUAWEI SAR Lab

U8665 WCDMA1900 9400CH Bottom edge 10mm

DUT: U8665; Type: HSDPA/UMTS/GPRS/GSM/EDGE Mobile Phone with Bluetooth;; Serial: SAR2

Communication System: HW-UMTS-FDD(WCDMA); Frequency: 1880 MHz

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.516$ mho/m; $\epsilon_r = 53.356$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3578; ConvF(6.68, 6.68, 6.68); Calibrated: 6/21/2011
- Sensor-Surface: 4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE4 Sn852; Calibrated: 11/16/2011
- Phantom: SAM4; Type: SAM; Serial: TP-1620
- DASY52 52.8.0(692); SEMCAD X 14.6.4(4989)

Configuration/Body/Area Scan (8x12x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 0.999 mW/g


Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 23.495 V/m; Power Drift = 0.04 dB

Peak SAR (extrapolated) = 1.5990

SAR(1 g) = 0.937 mW/g; SAR(10 g) = 0.519 mW/g

Maximum value of SAR (measured) = 1.036 mW/g

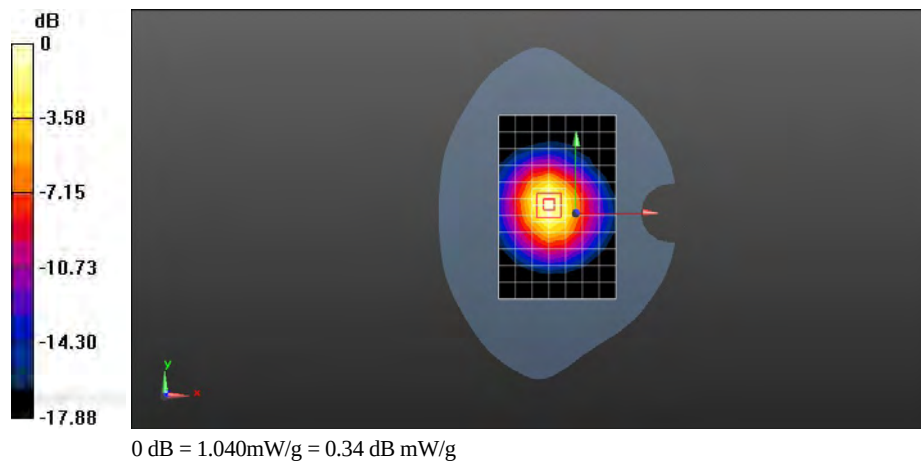

Test Laboratory: HUAWEI SAR Lab

U8665 WCDMA1900 9262CH Bottom edge 10mm

DUT: U8665; Type: HSDPA/UMTS/GPRS/GSM/EDGE Mobile Phone with Bluetooth;; Serial: SAR2

Communication System: HW-UMTS-FDD(WCDMA); Frequency: 1852.4 MHz

Medium parameters used (interpolated): $f = 1852.4$ MHz; $\sigma = 1.474$ mho/m; $\epsilon_r = 53.29$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3578; ConvF(6.68, 6.68, 6.68); Calibrated: 6/21/2011
- Sensor-Surface: 4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE4 Sn852; Calibrated: 11/16/2011
- Phantom: SAM4; Type: SAM; Serial: TP-1620
- DASY52 52.8.0(692); SEMCAD X 14.6.4(4989)

Configuration/Body/Area Scan (8x12x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 1.121 mW/g

Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm


Reference Value = 25.309 V/m; Power Drift = 0.02 dB

Peak SAR (extrapolated) = 1.7940

SAR(1 g) = 1.05 mW/g; SAR(10 g) = 0.583 mW/g

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 1.157 mW/g

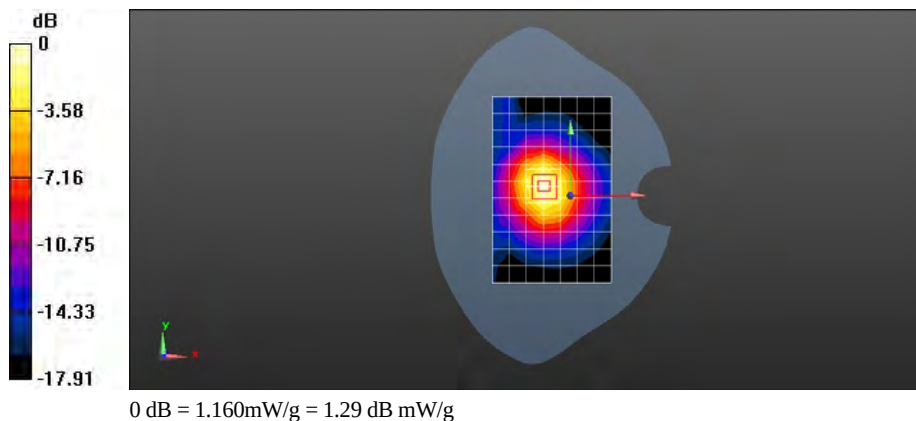

Test Laboratory: HUAWEI SAR Lab

U8665 WCDMA1900 9262CH Towards Ground 10mm under HSDPA

DUT: U8665; Type: HSDPA/UMTS/GPRS/GSM/EDGE Mobile Phone with Bluetooth;; Serial: SAR2

Communication System: HW-UMTS-FDD(WCDMA); Frequency: 1852.4 MHz

Medium parameters used (interpolated): $f = 1852.4$ MHz; $\sigma = 1.474$ mho/m; $\epsilon_r = 53.29$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3578; ConvF(6.68, 6.68, 6.68); Calibrated: 6/21/2011
- Sensor-Surface: 4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE4 Sn852; Calibrated: 11/16/2011
- Phantom: SAM4; Type: SAM; Serial: TP-1620
- DASY52 52.8.0(692); SEMCAD X 14.6.4(4989)

Configuration/Body/Area Scan (8x12x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 1.202 mW/g

Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm


Reference Value = 10.199 V/m; Power Drift = 0.10 dB

Peak SAR (extrapolated) = 2.1420

SAR(1 g) = 1.24 mW/g; SAR(10 g) = 0.690 mW/g

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 1.392 mW/g

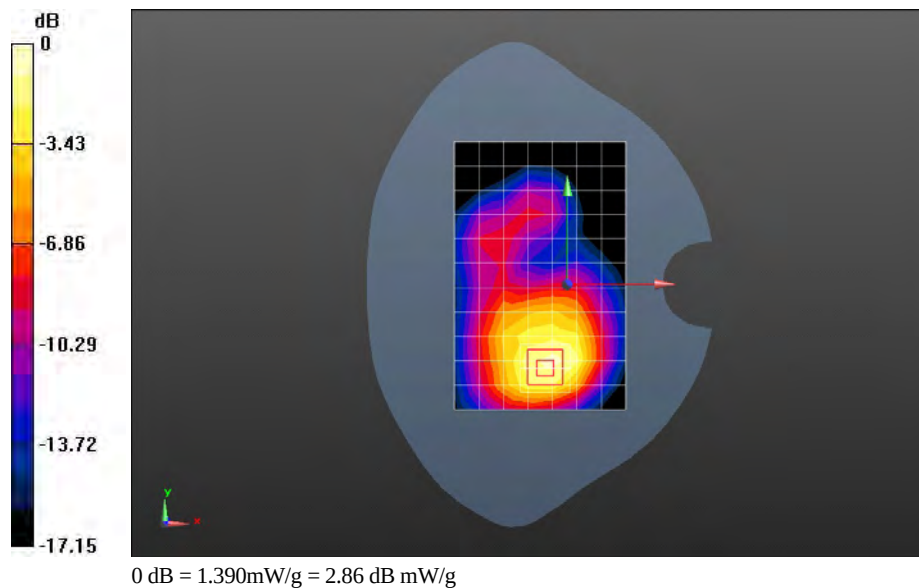

Test Laboratory: HUAWEI SAR Lab

U8665 WCDMA1900 9262CH Towards Ground 10mm under HSDPA with battery SN-UAIBC20X03007197

DUT: U8665; Type: HSDPA/UMTS/GPRS/GSM/EDGE Mobile Phone with Bluetooth;; Serial: SAR2

Communication System: HW-UMTS-FDD(WCDMA); Frequency: 1852.4 MHz

Medium parameters used (interpolated): $f = 1852.4$ MHz; $\sigma = 1.474$ mho/m; $\epsilon_r = 53.29$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3578; ConvF(6.68, 6.68, 6.68); Calibrated: 6/21/2011
- Sensor-Surface: 4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE4 Sn852; Calibrated: 11/16/2011
- Phantom: SAM4; Type: SAM; Serial: TP-1620
- DASY52 52.8.0(692); SEMCAD X 14.6.4(4989)

Configuration/Body/Area Scan (8x12x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 1.210 mW/g

Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm


Reference Value = 10.454 V/m; Power Drift = -0.03 dB

Peak SAR (extrapolated) = 2.1860

SAR(1 g) = 1.27 mW/g; SAR(10 g) = 0.703 mW/g

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 1.422 mW/g

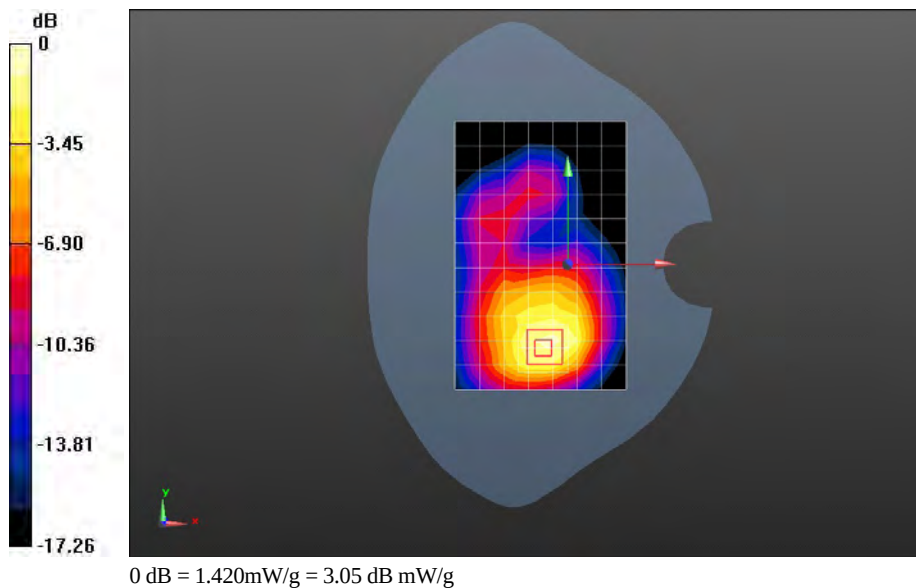

Test Laboratory: HUAWEI SAR Lab

U8665 WCDMA1900 9262CH Towards Ground 10mm under HSDPA with battery SN-UNDC306X03000317

DUT: U8665; Type: HSDPA/UMTS/GPRS/GSM/EDGE Mobile Phone with Bluetooth;; Serial: SAR2

Communication System: HW-UMTS-FDD(WCDMA); Frequency: 1852.4 MHz

Medium parameters used (interpolated): $f = 1852.4$ MHz; $\sigma = 1.474$ mho/m; $\epsilon_r = 53.29$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3578; ConvF(6.68, 6.68, 6.68); Calibrated: 6/21/2011
- Sensor-Surface: 4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE4 Sn852; Calibrated: 11/16/2011
- Phantom: SAM4; Type: SAM; Serial: TP-1620
- DASY52 52.8.0(692); SEMCAD X 14.6.4(4989)

Configuration/Body/Area Scan (8x12x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 1.212 mW/g

Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm


Reference Value = 10.116 V/m; Power Drift = -0.02 dB

Peak SAR (extrapolated) = 2.1810

SAR(1 g) = 1.26 mW/g; SAR(10 g) = 0.700 mW/g

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 1.415 mW/g

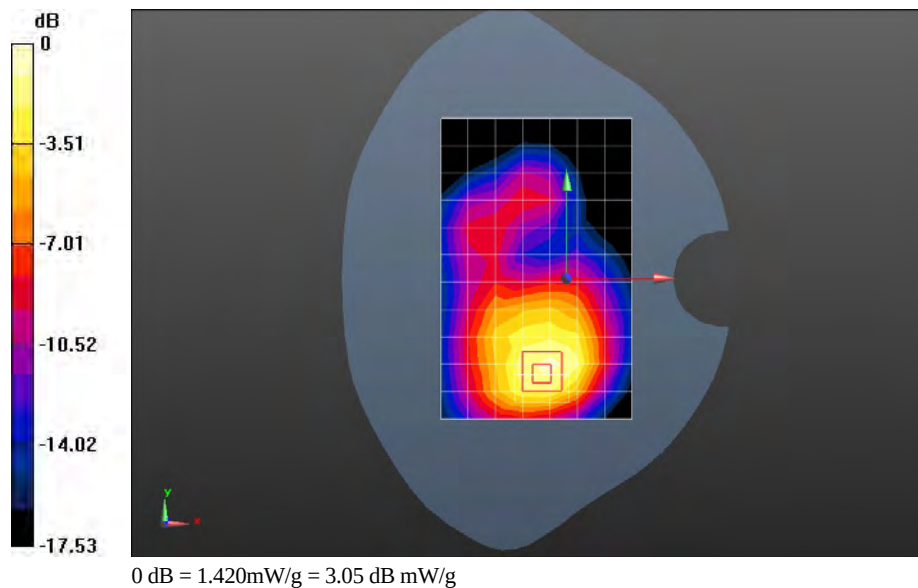

Test Laboratory: HUAWEI SAR Lab

U8665 WCDMA1900 9262CH Towards Ground 10mm under HSDPA with battery SN-MHCBB066I44E1903**DUT: U8665; Type: HSDPA/UMTS/GPRS/GSM/EDGE Mobile Phone with Bluetooth;; Serial: SAR2**

Communication System: HW-UMTS-FDD(WCDMA); Frequency: 1852.4 MHz

Medium parameters used (interpolated): $f = 1852.4$ MHz; $\sigma = 1.474$ mho/m; $\epsilon_r = 53.29$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3578; ConvF(6.68, 6.68, 6.68); Calibrated: 6/21/2011
- Sensor-Surface: 4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE4 Sn852; Calibrated: 11/16/2011
- Phantom: SAM4; Type: SAM; Serial: TP-1620
- DASY52 52.8.0(692); SEMCAD X 14.6.4(4989)

Configuration/Body/Area Scan (8x12x1): Measurement grid: dx=15mm, dy=15mm[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 1.199 mW/g


Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 10.128 V/m; Power Drift = -0.0095 dB


Peak SAR (extrapolated) = 2.2020

SAR(1 g) = 1.27 mW/g; SAR(10 g) = 0.703 mW/g[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 1.423 mW/g

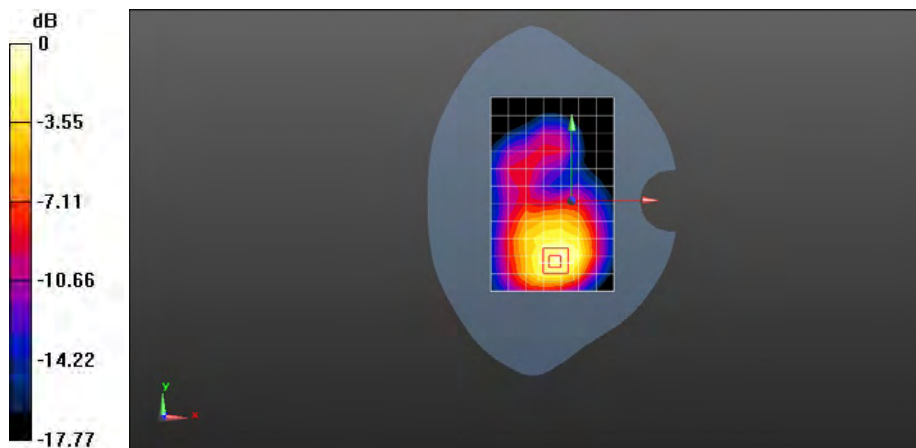

0 dB = 1.420mW/g = 3.05 dB mW/g

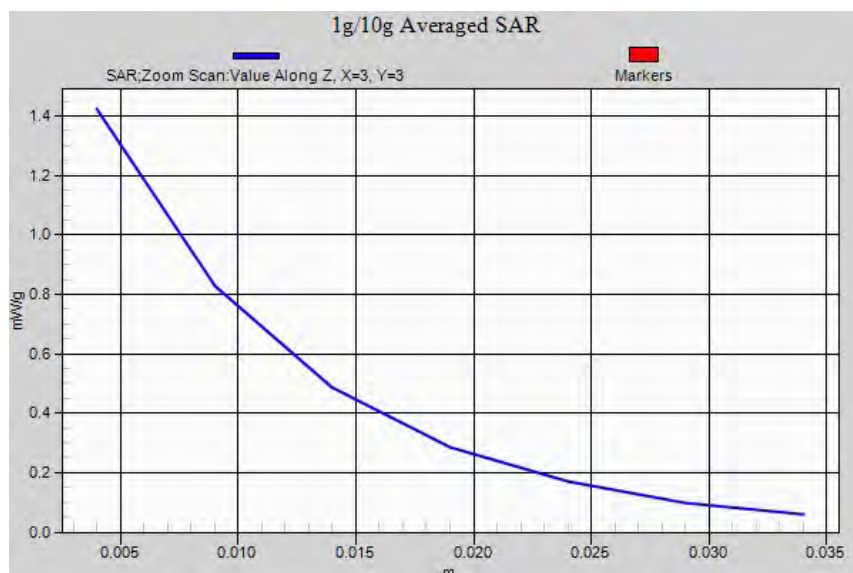

Test Laboratory: HUAWEI SAR Lab

U8665 WCDMA1900 9262CH Towards Ground 10mm under HSDPA and hotspot closed with battery SN-MHCBB066I44E1903

DUT: U8665; Type: HSDPA/UMTS/GPRS/GSM/EDGE Mobile Phone with Bluetooth;; Serial: SAR2

Communication System: HW-UMTS-FDD(WCDMA); Frequency: 1852.4 MHz

Medium parameters used (interpolated): $f = 1852.4$ MHz; $\sigma = 1.474$ mho/m; $\epsilon_r = 53.29$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3578; ConvF(6.68, 6.68, 6.68); Calibrated: 6/21/2011
- Sensor-Surface: 4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE4 Sn852; Calibrated: 11/16/2011
- Phantom: SAM4; Type: SAM; Serial: TP-1620
- DASY52 52.8.0(692); SEMCAD X 14.6.4(4989)

Configuration/Body/Area Scan (8x12x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 1.675 mW/g

Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm


Reference Value = 13.329 V/m; Power Drift = 0.04 dB

Peak SAR (extrapolated) = 2.8820

SAR(1 g) = 1.66 mW/g; SAR(10 g) = 0.916 mW/g

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 1.842 mW/g

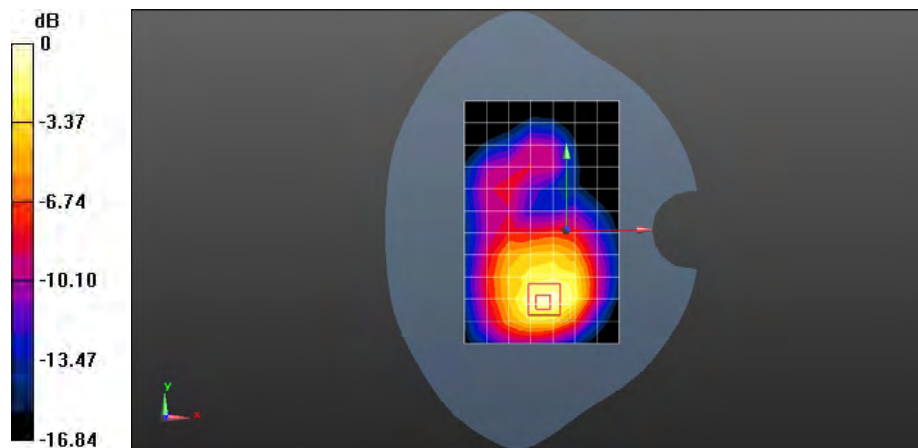

0 dB = 1.840mW/g = 5.30 dB mW/g

Test Laboratory: HUAWEI SAR Lab

U8665 WCDMA1900 9400CH Towards Phantom 15mm

DUT: U8665; Type: HSDPA/UMTS/GPRS/GSM/EDGE Mobile Phone with Bluetooth;; Serial: SAR2

Communication System: HW-UMTS-FDD(WCDMA); Frequency: 1880 MHz

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.506$ mho/m; $\epsilon_r = 53.856$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3578; ConvF(6.68, 6.68, 6.68); Calibrated: 6/21/2011
- Sensor-Surface: 4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE4 Sn852; Calibrated: 11/16/2011
- Phantom: SAM4; Type: SAM; Serial: TP-1620
- DASY52 52.8.0(692); SEMCAD X 14.6.4(4989)

Configuration/Body/Area Scan (8x12x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 0.727 mW/g


Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 9.775 V/m; Power Drift = -0.12 dB

Peak SAR (extrapolated) = 1.1470

SAR(1 g) = 0.703 mW/g; SAR(10 g) = 0.430 mW/g

Maximum value of SAR (measured) = 0.758 mW/g

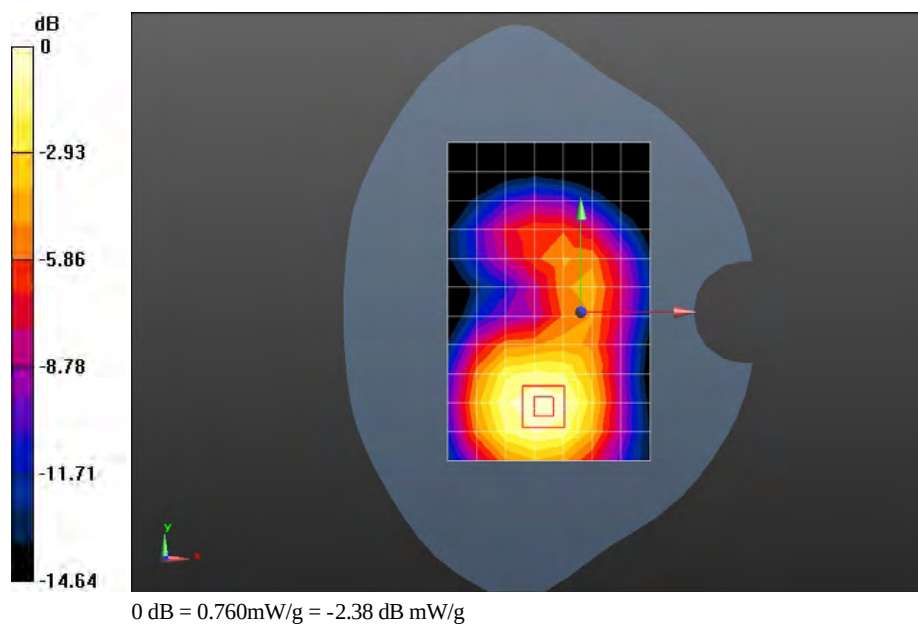

Test Laboratory: HUAWEI SAR Lab

U8665 WCDMA1900 9538CH Towards Ground 15mm

DUT: U8665; Type: HSDPA/UMTS/GPRS/GSM/EDGE Mobile Phone with Bluetooth;; Serial: SAR2

Communication System: HW-UMTS-FDD(WCDMA); Frequency: 1907.6 MHz

Medium parameters used: $f = 1908$ MHz; $\sigma = 1.524$ mho/m; $\epsilon_r = 53.674$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3578; ConvF(6.68, 6.68, 6.68); Calibrated: 6/21/2011
- Sensor-Surface: 4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE4 Sn852; Calibrated: 11/16/2011
- Phantom: SAM4; Type: SAM; Serial: TP-1620
- DASY52 52.8.0(692); SEMCAD X 14.6.4(4989)

Configuration/Body/Area Scan (8x12x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 0.885 mW/g


Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 8.274 V/m; Power Drift = 0.17 dB

Peak SAR (extrapolated) = 1.4420

SAR(1 g) = 0.859 mW/g; SAR(10 g) = 0.498 mW/g

Maximum value of SAR (measured) = 0.939 mW/g

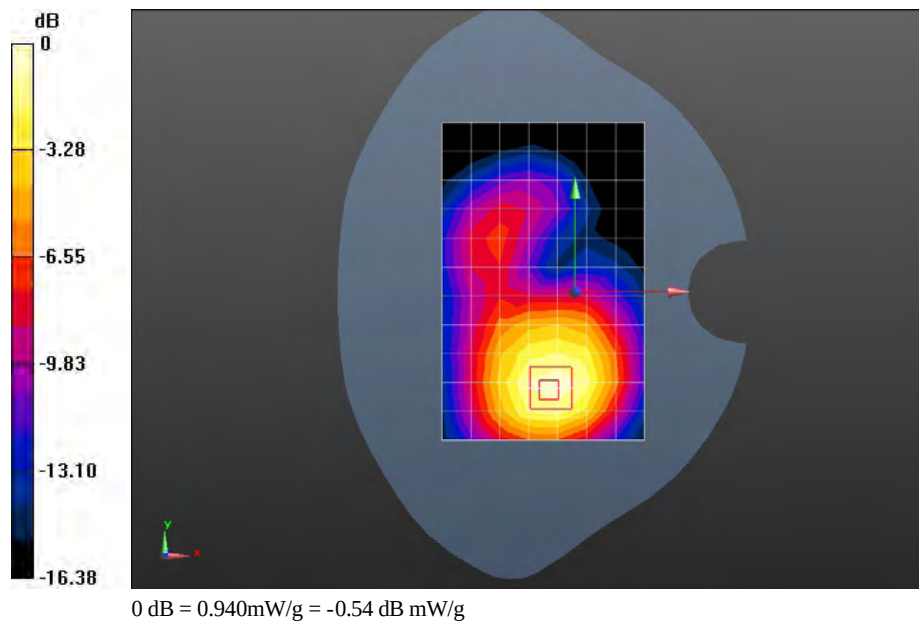

Test Laboratory: HUAWEI SAR Lab

U8665 WCDMA1900 9400CH Towards Ground 15mm

DUT: U8665; Type: HSDPA/UMTS/GPRS/GSM/EDGE Mobile Phone with Bluetooth;; Serial: SAR2

Communication System: HW-UMTS-FDD(WCDMA); Frequency: 1880 MHz

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.506$ mho/m; $\epsilon_r = 53.856$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3578; ConvF(6.68, 6.68, 6.68); Calibrated: 6/21/2011
- Sensor-Surface: 4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE4 Sn852; Calibrated: 11/16/2011
- Phantom: SAM4; Type: SAM; Serial: TP-1620
- DASY52 52.8.0(692); SEMCAD X 14.6.4(4989)

Configuration/Body/Area Scan (8x12x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 0.896 mW/g


Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 8.135 V/m; Power Drift = -0.06 dB

Peak SAR (extrapolated) = 1.4500

SAR(1 g) = 0.868 mW/g; SAR(10 g) = 0.506 mW/g

Maximum value of SAR (measured) = 0.948 mW/g

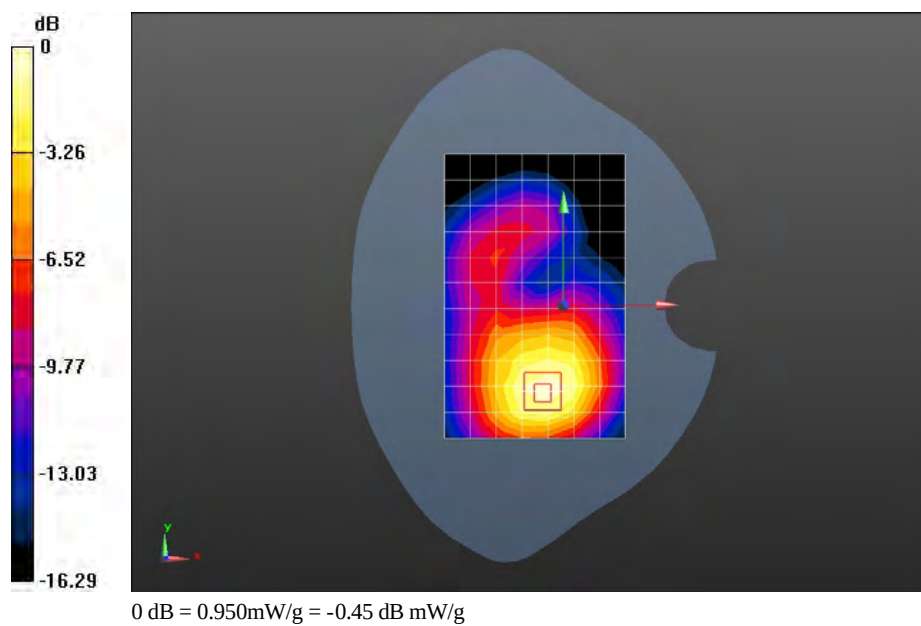

Test Laboratory: HUAWEI SAR Lab

U8665 WCDMA1900 9262CH Towards Ground 15mm

DUT: U8665; Type: HSDPA/UMTS/GPRS/GSM/EDGE Mobile Phone with Bluetooth;; Serial: SAR2

Communication System: HW-UMTS-FDD(WCDMA); Frequency: 1852.4 MHz

Medium parameters used (interpolated): $f = 1852.4$ MHz; $\sigma = 1.463$ mho/m; $\epsilon_r = 53.79$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3578; ConvF(6.68, 6.68, 6.68); Calibrated: 6/21/2011
- Sensor-Surface: 4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE4 Sn852; Calibrated: 11/16/2011
- Phantom: SAM4; Type: SAM; Serial: TP-1620
- DASY52 52.8.0(692); SEMCAD X 14.6.4(4989)

Configuration/Body/Area Scan (8x12x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.930 mW/g

Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm


Reference Value = 8.576 V/m; Power Drift = -0.04 dB

Peak SAR (extrapolated) = 1.4700

SAR(1 g) = 0.901 mW/g; SAR(10 g) = 0.531 mW/g

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.969 mW/g

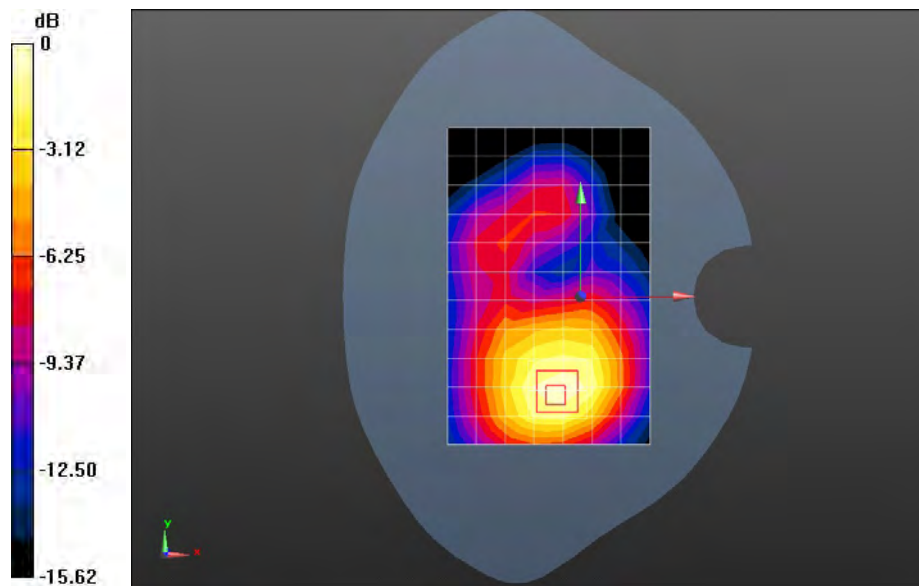

0 dB = 0.970mW/g = -0.26 dB mW/g

Test Laboratory: HUAWEI SAR Lab

U8665 WCDMA1900 9262CH Towards Ground 15mm with HSDPA

DUT: U8665; Type: HSDPA/UMTS/GPRS/GSM/EDGE Mobile Phone with Bluetooth;; Serial: SAR2

Communication System: HW-UMTS-FDD(WCDMA); Frequency: 1852.4 MHz

Medium parameters used (interpolated): $f = 1852.4$ MHz; $\sigma = 1.474$ mho/m; $\epsilon_r = 53.29$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3578; ConvF(6.68, 6.68, 6.68); Calibrated: 6/21/2011
- Sensor-Surface: 4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE4 Sn852; Calibrated: 11/16/2011
- Phantom: SAM4; Type: SAM; Serial: TP-1620
- DASY52 52.8.0(692); SEMCAD X 14.6.4(4989)

Configuration/Body/Area Scan (8x12x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.888 mW/g

Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm


Reference Value = 9.193 V/m; Power Drift = -0.0054 dB

Peak SAR (extrapolated) = 1.4360

SAR(1 g) = 0.875 mW/g; SAR(10 g) = 0.517 mW/g

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.946 mW/g

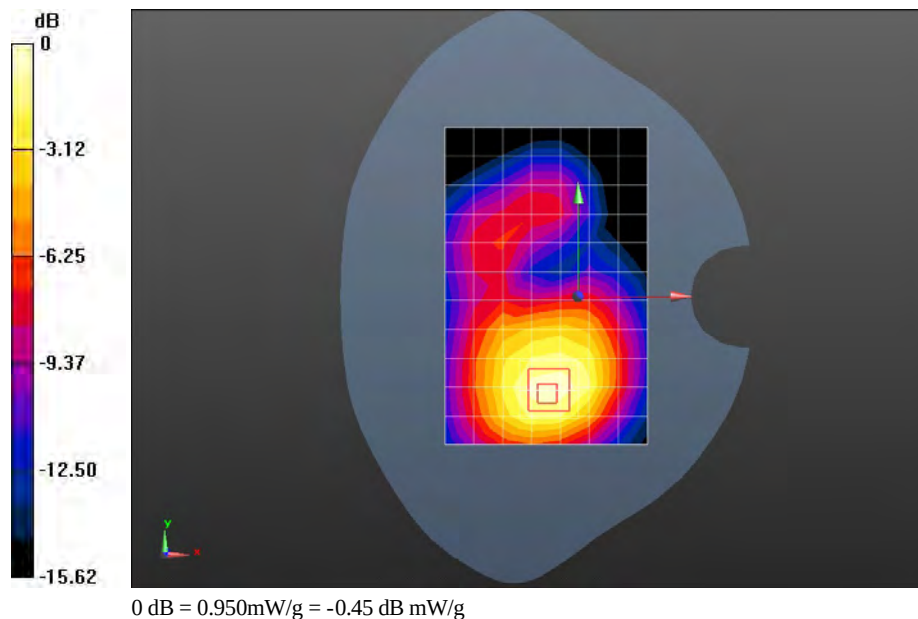

Test Laboratory: HUAWEI SAR Lab

U8665 WCDMA1900 9262CH Towards Ground 15mm with headset

DUT: U8665; Type: HSDPA/UMTS/GPRS/GSM/EDGE Mobile Phone with Bluetooth;; Serial: SAR2

Communication System: HW-UMTS-FDD(WCDMA); Frequency: 1852.4 MHz

Medium parameters used (interpolated): $f = 1852.4$ MHz; $\sigma = 1.463$ mho/m; $\epsilon_r = 53.79$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3578; ConvF(6.68, 6.68, 6.68); Calibrated: 6/21/2011
- Sensor-Surface: 4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE4 Sn852; Calibrated: 11/16/2011
- Phantom: SAM4; Type: SAM; Serial: TP-1620
- DASY52 52.8.0(692); SEMCAD X 14.6.4(4989)

Configuration/Body/Area Scan (8x12x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.918 mW/g

Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm


Reference Value = 8.857 V/m; Power Drift = 0.11 dB

Peak SAR (extrapolated) = 1.4850

SAR(1 g) = 0.904 mW/g; SAR(10 g) = 0.530 mW/g

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.988 mW/g

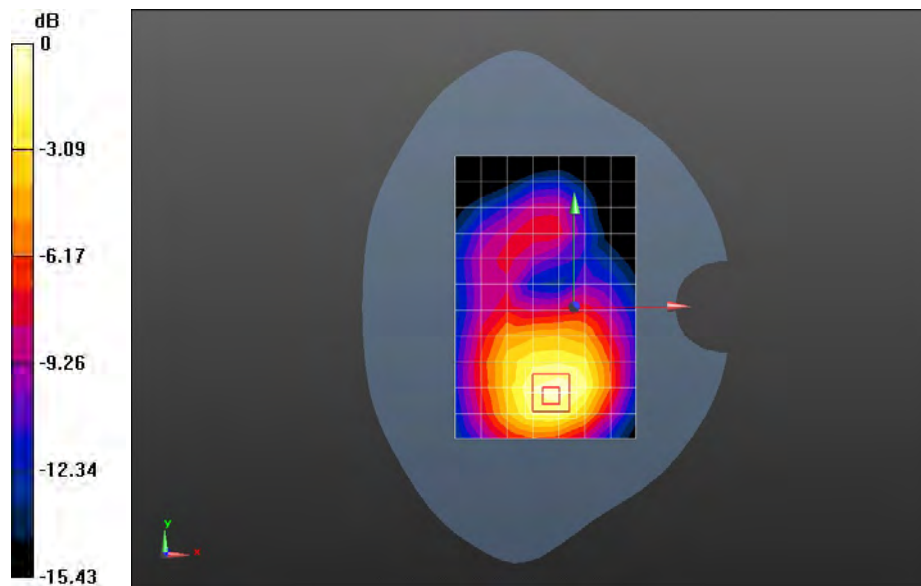

0 dB = 0.990mW/g = -0.09 dB mW/g

Test Laboratory: HUAWEI SAR Lab

U8665 WCDMA1900 9262CH Towards Ground 15mm with battery SN-UAIBC20X03007197

DUT: U8665; Type: HSDPA/UMTS/GPRS/GSM/EDGE Mobile Phone with Bluetooth;; Serial: SAR2

Communication System: HW-UMTS-FDD(WCDMA); Frequency: 1852.4 MHz

Medium parameters used (interpolated): $f = 1852.4$ MHz; $\sigma = 1.463$ mho/m; $\epsilon_r = 53.79$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3578; ConvF(6.68, 6.68, 6.68); Calibrated: 6/21/2011
- Sensor-Surface: 4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE4 Sn852; Calibrated: 11/16/2011
- Phantom: SAM4; Type: SAM; Serial: TP-1620
- DASY52 52.8.0(692); SEMCAD X 14.6.4(4989)

Configuration/Body/Area Scan (8x12x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.927 mW/g

Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm


Reference Value = 8.277 V/m; Power Drift = 0.02 dB

Peak SAR (extrapolated) = 1.4920

SAR(1 g) = 0.909 mW/g; SAR(10 g) = 0.537 mW/g

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.997 mW/g

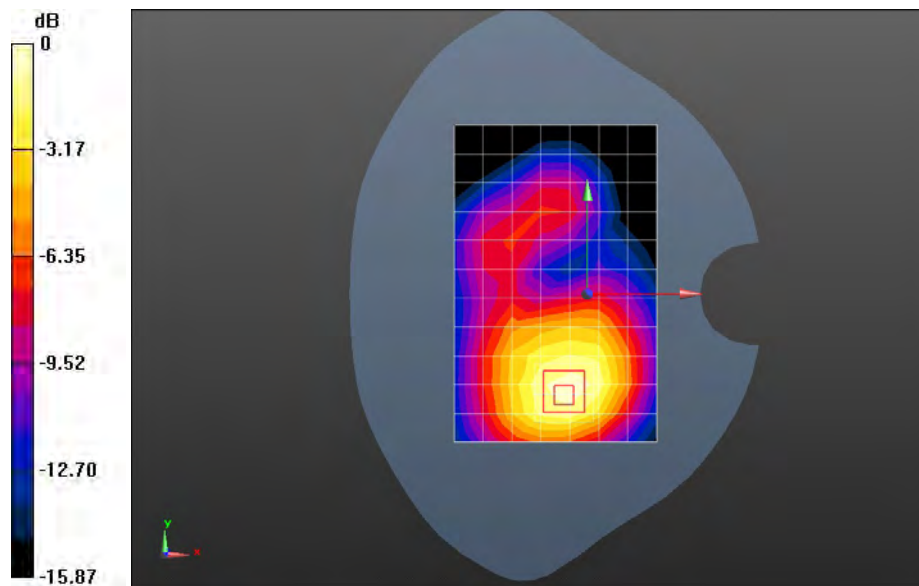

0 dB = 1.000mW/g = 0 dB mW/g

Test Laboratory: HUAWEI SAR Lab

U8665 WCDMA1900 9262CH Towards Ground 15mm with battery SN-UNDC306X03000317

DUT: U8665; Type: HSDPA/UMTS/GPRS/GSM/EDGE Mobile Phone with Bluetooth;; Serial: SAR2

Communication System: HW-UMTS-FDD(WCDMA); Frequency: 1852.4 MHz

Medium parameters used (interpolated): $f = 1852.4$ MHz; $\sigma = 1.463$ mho/m; $\epsilon_r = 53.79$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3578; ConvF(6.68, 6.68, 6.68); Calibrated: 6/21/2011
- Sensor-Surface: 4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE4 Sn852; Calibrated: 11/16/2011
- Phantom: SAM4; Type: SAM; Serial: TP-1620
- DASY52 52.8.0(692); SEMCAD X 14.6.4(4989)

Configuration/Body/Area Scan (8x12x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.946 mW/g

Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm


Reference Value = 7.890 V/m; Power Drift = 0.05 dB

Peak SAR (extrapolated) = 1.6070

SAR(1 g) = 0.981 mW/g; SAR(10 g) = 0.578 mW/g

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 1.065 mW/g

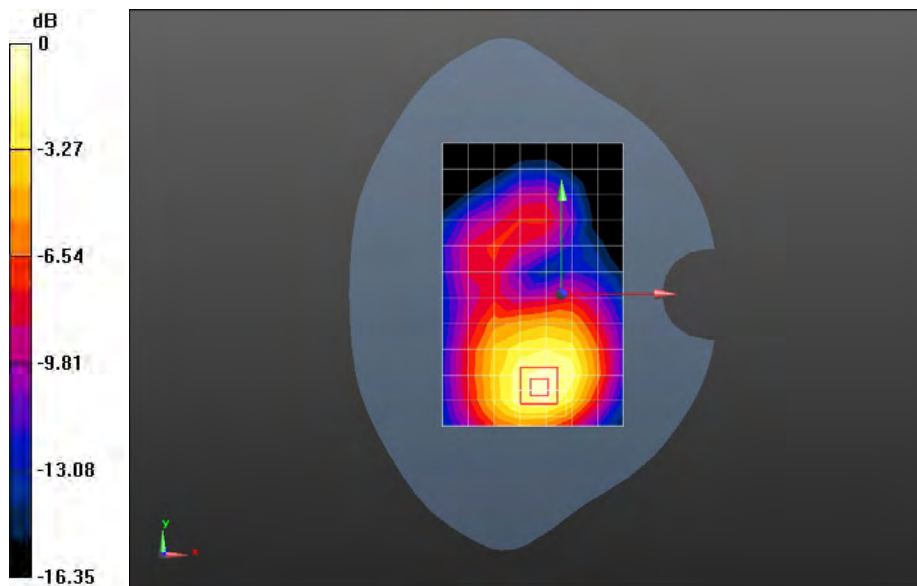

0 dB = 1.070mW/g = 0.59 dB mW/g

Test Laboratory: HUAWEI SAR Lab

U8665 WCDMA1900 9262CH Towards Ground 15mm with battery SN-MHCBB066I44E1903

DUT: U8665; Type: HSDPA/UMTS/GPRS/GSM/EDGE Mobile Phone with Bluetooth;; Serial: SAR2

Communication System: HW-UMTS-FDD(WCDMA); Frequency: 1852.4 MHz

Medium parameters used (interpolated): $f = 1852.4$ MHz; $\sigma = 1.463$ mho/m; $\epsilon_r = 53.79$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3578; ConvF(6.68, 6.68, 6.68); Calibrated: 6/21/2011
- Sensor-Surface: 4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE4 Sn852; Calibrated: 11/16/2011
- Phantom: SAM4; Type: SAM; Serial: TP-1620
- DASY52 52.8.0(692); SEMCAD X 14.6.4(4989)

Configuration/Body/Area Scan (8x12x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.923 mW/g

Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm


Reference Value = 8.222 V/m; Power Drift = 0.13 dB

Peak SAR (extrapolated) = 1.4960

SAR(1 g) = 0.913 mW/g; SAR(10 g) = 0.540 mW/g

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 1.000 mW/g

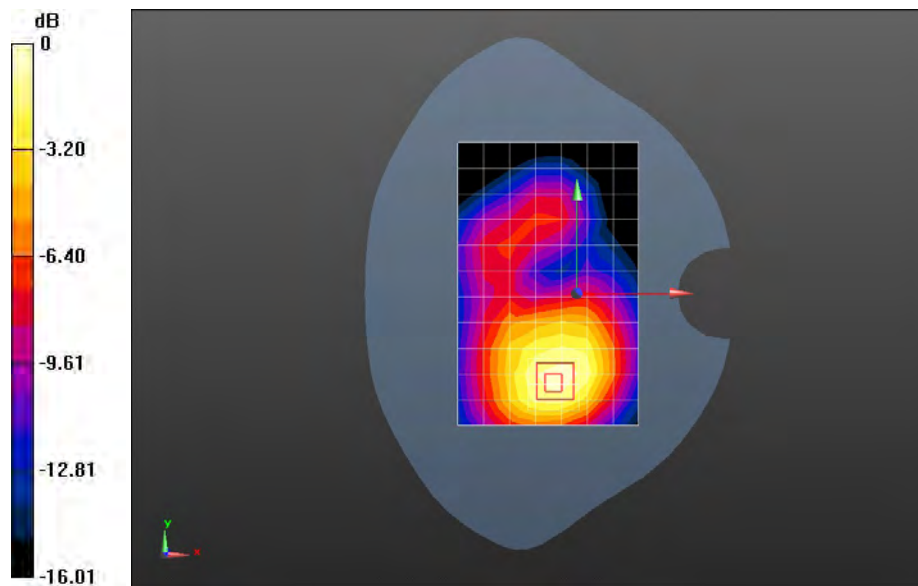

0 dB = 1.000mW/g = 0 dB mW/g

Test Laboratory: HUAWEI SAR Lab

U8665 WiFi 802.11b 11CH Left hand touch cheek

DUT: U8665; Type: HSDPA/UMTS/GPRS/GSM/EDGE Mobile Phone with Bluetooth;; Serial: SAR2

Communication System: WiFi(802.11b/g/n); Frequency: 2462 MHz

Medium parameters used: $f = 2462$ MHz; $\sigma = 1.847$ mho/m; $\epsilon_r = 39.06$; $\rho = 1000$ kg/m³

Phantom section: Left Section

DASY Configuration:

- Probe: EX3DV4 - SN3578; ConvF(6.42, 6.42, 6.42); Calibrated: 6/21/2011
- Sensor-Surface: 4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE4 Sn852; Calibrated: 11/16/2011
- Phantom: SAM4; Type: SAM; Serial: TP-1620
- DASY52 52.8.0(692); SEMCAD X 14.6.4(4989)

Configuration/Head/Area Scan (8x12x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 0.032 mW/g


Configuration/Head/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 4.438 V/m; Power Drift = -0.18 dB

Peak SAR (extrapolated) = 0.1480

SAR(1 g) = 0.035 mW/g; SAR(10 g) = 0.014 mW/g

Maximum value of SAR (measured) = 0.036 mW/g

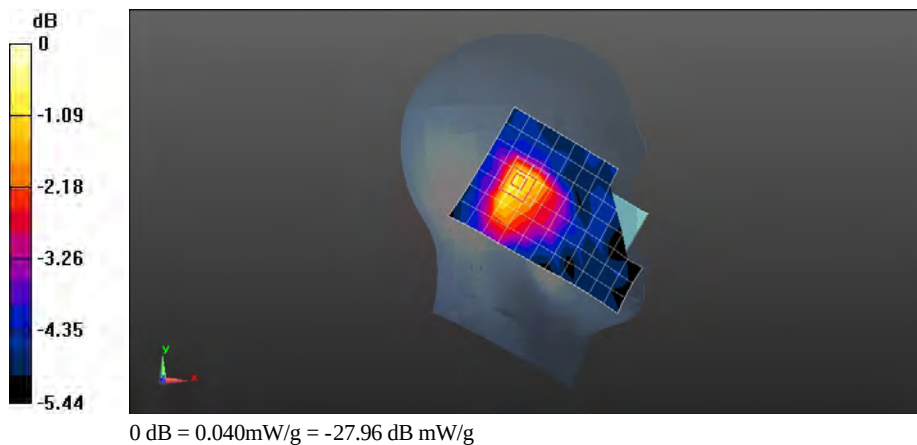

Test Laboratory: HUAWEI SAR Lab

U8665 WiFi 802.11b 11CH Left hand tilt 15 degree

DUT: U8665; Type: HSDPA/UMTS/GPRS/GSM/EDGE Mobile Phone with Bluetooth;; Serial: SAR2

Communication System: WiFi(802.11b/g/n); Frequency: 2462 MHz

Medium parameters used: $f = 2462$ MHz; $\sigma = 1.847$ mho/m; $\epsilon_r = 39.06$; $\rho = 1000$ kg/m³

Phantom section: Left Section

DASY Configuration:

- Probe: EX3DV4 - SN3578; ConvF(6.42, 6.42, 6.42); Calibrated: 6/21/2011
- Sensor-Surface: 4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE4 Sn852; Calibrated: 11/16/2011
- Phantom: SAM4; Type: SAM; Serial: TP-1620
- DASY52 52.8.0(692); SEMCAD X 14.6.4(4989)

Configuration/Head/Area Scan (8x12x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 0.027 mW/g


Configuration/Head/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 4.015 V/m; Power Drift = 0.0082 dB

Peak SAR (extrapolated) = 0.1290

SAR(1 g) = 0.027 mW/g; SAR(10 g) = 0.012 mW/g

Maximum value of SAR (measured) = 0.030 mW/g

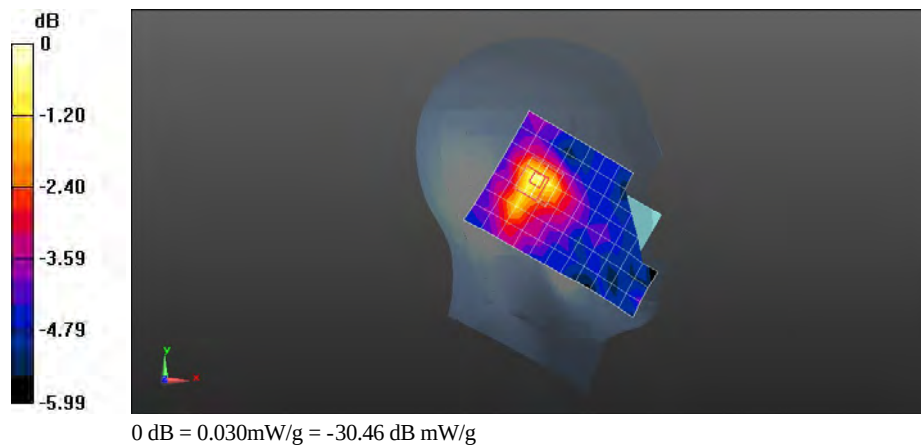

Test Laboratory: HUAWEI SAR Lab

U8665 WiFi 802.11b 11CH Right hand touch cheek

DUT: U8665; Type: HSDPA/UMTS/GPRS/GSM/EDGE Mobile Phone with Bluetooth;; Serial: SAR2

Communication System: WiFi(802.11b/g/n); Frequency: 2462 MHz

Medium parameters used: $f = 2462$ MHz; $\sigma = 1.847$ mho/m; $\epsilon_r = 39.06$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY Configuration:

- Probe: EX3DV4 - SN3578; ConvF(6.42, 6.42, 6.42); Calibrated: 6/21/2011
- Sensor-Surface: 4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE4 Sn852; Calibrated: 11/16/2011
- Phantom: SAM4; Type: SAM; Serial: TP-1620
- DASY52 52.8.0(692); SEMCAD X 14.6.4(4989)

Configuration/Head/Area Scan (8x12x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 0.053 mW/g


Configuration/Head/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 3.265 V/m; Power Drift = -0.04 dB

Peak SAR (extrapolated) = 0.2940

SAR(1 g) = 0.059 mW/g; SAR(10 g) = 0.027 mW/g

Maximum value of SAR (measured) = 0.063 mW/g

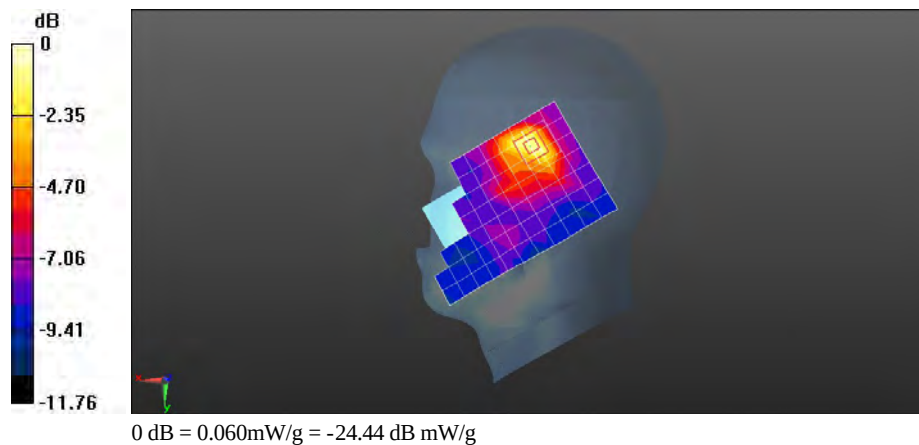

Test Laboratory: HUAWEI SAR Lab

U8665 WiFi 802.11b 11CH Right hand tilt 15 degree

DUT: U8665; Type: HSDPA/UMTS/GPRS/GSM/EDGE Mobile Phone with Bluetooth;; Serial: SAR2

Communication System: WiFi(802.11b/g/n); Frequency: 2462 MHz

Medium parameters used: $f = 2462$ MHz; $\sigma = 1.847$ mho/m; $\epsilon_r = 39.06$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY Configuration:

- Probe: EX3DV4 - SN3578; ConvF(6.42, 6.42, 6.42); Calibrated: 6/21/2011
- Sensor-Surface: 4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE4 Sn852; Calibrated: 11/16/2011
- Phantom: SAM4; Type: SAM; Serial: TP-1620
- DASY52 52.8.0(692); SEMCAD X 14.6.4(4989)

Configuration/Head/Area Scan (8x12x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 0.031 mW/g


Configuration/Head/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 2.984 V/m; Power Drift = 0.08 dB

Peak SAR (extrapolated) = 0.0770

SAR(1 g) = 0.030 mW/g; SAR(10 g) = 0.015 mW/g

Maximum value of SAR (measured) = 0.033 mW/g

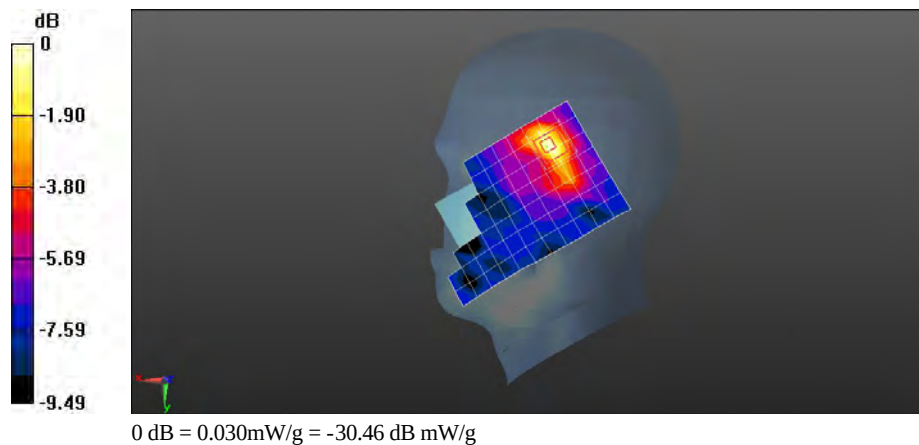

Test Laboratory: HUAWEI SAR Lab

U8665 WiFi 802.11b 11CH Right hand touch cheek with battery SN-UAIBC20X03007197

DUT: U8665; Type: HSDPA/UMTS/GPRS/GSM/EDGE Mobile Phone with Bluetooth;; Serial: SAR2

Communication System: WiFi(802.11b/g/n); Frequency: 2462 MHz

Medium parameters used: $f = 2462$ MHz; $\sigma = 1.847$ mho/m; $\epsilon_r = 39.06$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY Configuration:

- Probe: EX3DV4 - SN3578; ConvF(6.42, 6.42, 6.42); Calibrated: 6/21/2011
- Sensor-Surface: 4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE4 Sn852; Calibrated: 11/16/2011
- Phantom: SAM4; Type: SAM; Serial: TP-1620
- DASY52 52.8.0(692); SEMCAD X 14.6.4(4989)

Configuration/Head/Area Scan (8x12x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 0.055 mW/g


Configuration/Head/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 3.231 V/m; Power Drift = 0.17 dB

Peak SAR (extrapolated) = 0.1430

SAR(1 g) = 0.058 mW/g; SAR(10 g) = 0.027 mW/g

Maximum value of SAR (measured) = 0.066 mW/g

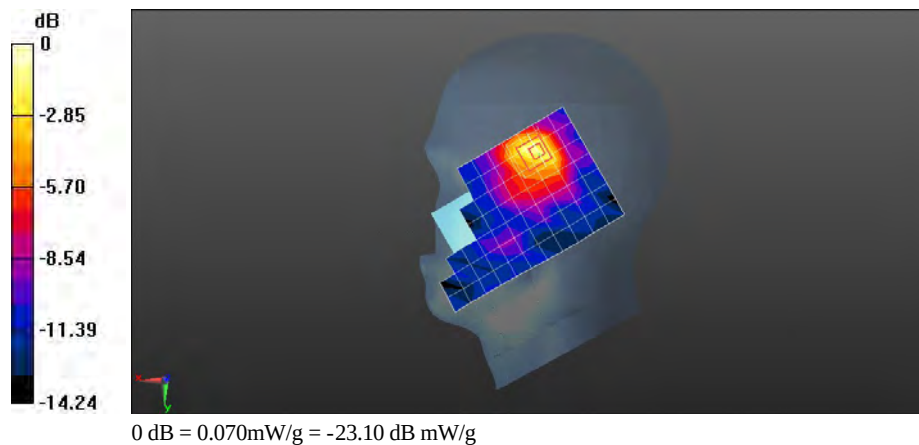

Test Laboratory: HUAWEI SAR Lab

U8665 WiFi 802.11b 11CH Right hand touch cheek with battery SN-UNDC306X03000317

DUT: U8665; Type: HSDPA/UMTS/GPRS/GSM/EDGE Mobile Phone with Bluetooth;; Serial: SAR2

Communication System: WiFi(802.11b/g/n); Frequency: 2462 MHz

Medium parameters used: $f = 2462$ MHz; $\sigma = 1.847$ mho/m; $\epsilon_r = 39.06$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY Configuration:

- Probe: EX3DV4 - SN3578; ConvF(6.42, 6.42, 6.42); Calibrated: 6/21/2011
- Sensor-Surface: 4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE4 Sn852; Calibrated: 11/16/2011
- Phantom: SAM4; Type: SAM; Serial: TP-1620
- DASY52 52.8.0(692); SEMCAD X 14.6.4(4989)

Configuration/Head/Area Scan (8x12x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 0.053 mW/g


Configuration/Head/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 3.043 V/m; Power Drift = 0.11 dB

Peak SAR (extrapolated) = 0.1230

SAR(1 g) = 0.057 mW/g; SAR(10 g) = 0.027 mW/g

Maximum value of SAR (measured) = 0.064 mW/g

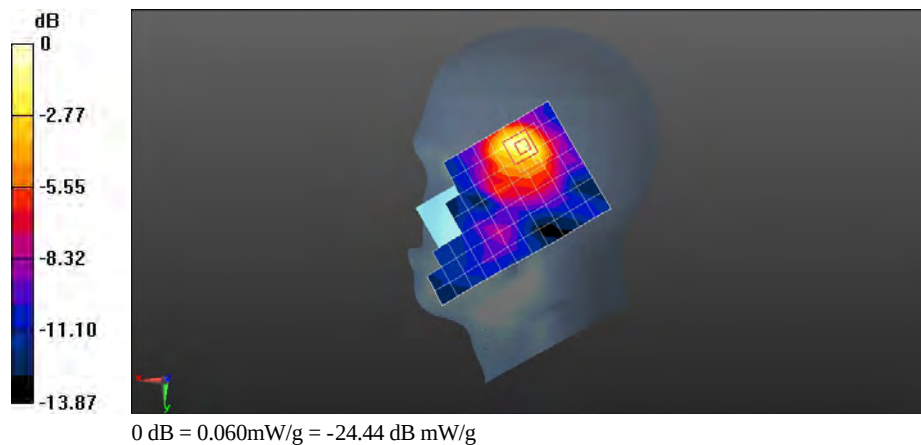

Test Laboratory: HUAWEI SAR Lab

U8665 WiFi 802.11b 11CH Right hand touch cheek with battery SN-MHCBB066I44E1903

DUT: U8665; Type: HSDPA/UMTS/GPRS/GSM/EDGE Mobile Phone with Bluetooth;; Serial: SAR2

Communication System: WiFi(802.11b/g/n); Frequency: 2462 MHz

Medium parameters used: $f = 2462$ MHz; $\sigma = 1.847$ mho/m; $\epsilon_r = 39.06$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY Configuration:

- Probe: EX3DV4 - SN3578; ConvF(6.42, 6.42, 6.42); Calibrated: 6/21/2011
- Sensor-Surface: 4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE4 Sn852; Calibrated: 11/16/2011
- Phantom: SAM4; Type: SAM; Serial: TP-1620
- DASY52 52.8.0(692); SEMCAD X 14.6.4(4989)

Configuration/Head/Area Scan (8x12x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 0.055 mW/g



Configuration/Head/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 3.218 V/m; Power Drift = 0.07 dB

Peak SAR (extrapolated) = 0.1460

SAR(1 g) = 0.061 mW/g; SAR(10 g) = 0.028 mW/g

Maximum value of SAR (measured) = 0.068 mW/g

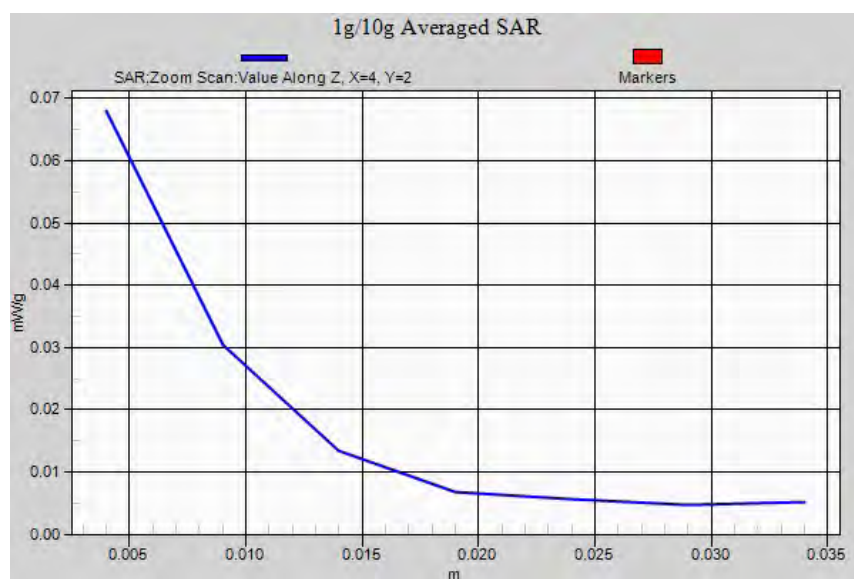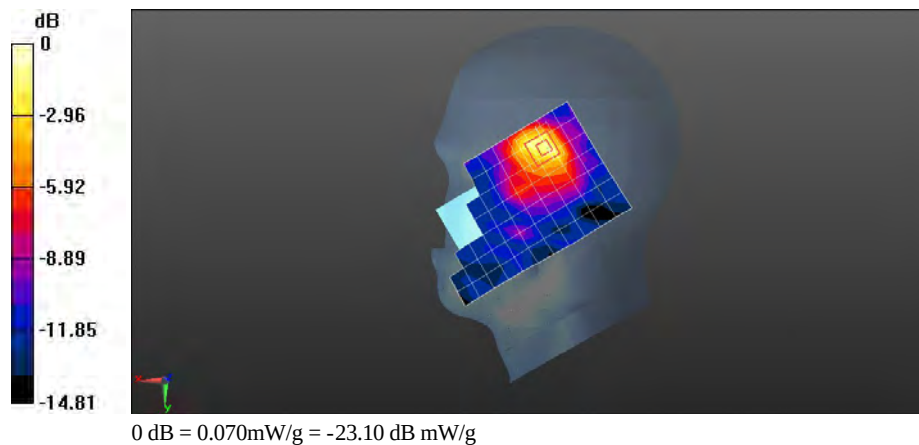

Test Laboratory: HUAWEI SAR Lab

U8665 WiFi 802.11b 11CH Towards Phantom 10mm

DUT: U8665; Type: HSDPA/UMTS/GPRS/GSM/EDGE Mobile Phone with Bluetooth;; Serial: SAR2

Communication System: WiFi(802.11b/g/n); Frequency: 2462 MHz

Medium parameters used: $f = 2462$ MHz; $\sigma = 1.991$ mho/m; $\epsilon_r = 52.249$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3578; ConvF(6.18, 6.18, 6.18); Calibrated: 6/21/2011
- Sensor-Surface: 4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE4 Sn852; Calibrated: 11/16/2011
- Phantom: SAM3; Type: SAM; Serial: TP-1597
- DASY52 52.8.0(692); SEMCAD X 14.6.4(4989)

Configuration/Body/Area Scan (8x12x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 0.016 mW/g


Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 1.806 V/m; Power Drift = -0.14 dB

Peak SAR (extrapolated) = 0.0310

SAR(1 g) = 0.013 mW/g; SAR(10 g) = 0.00833 mW/g

Maximum value of SAR (measured) = 0.015 mW/g

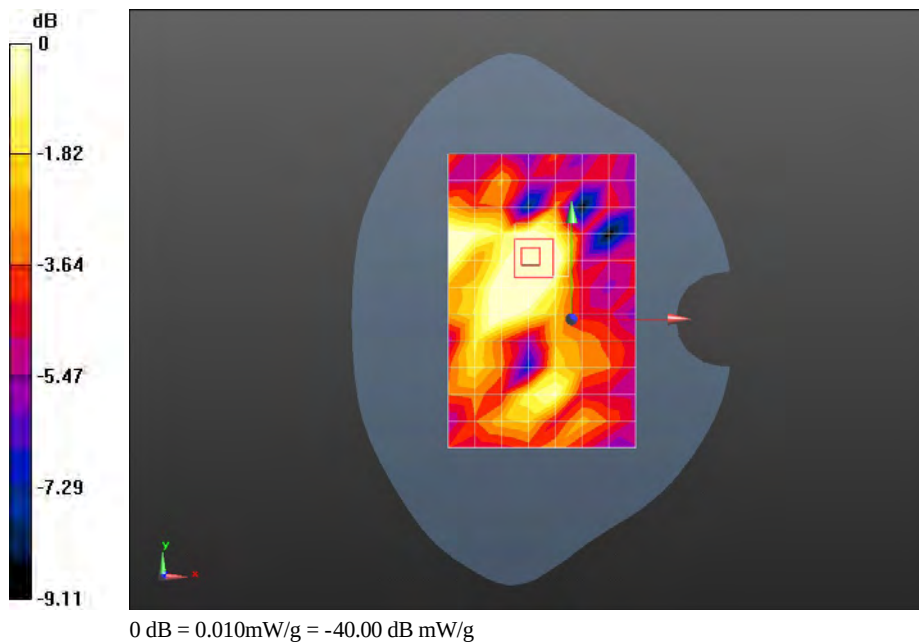

Test Laboratory: HUAWEI SAR Lab

U8665 WiFi 802.11b 11CH Towards Ground 10mm

DUT: U8665; Type: HSDPA/UMTS/GPRS/GSM/EDGE Mobile Phone with Bluetooth;; Serial: SAR2

Communication System: WiFi(802.11b/g/n); Frequency: 2462 MHz

Medium parameters used: $f = 2462$ MHz; $\sigma = 1.991$ mho/m; $\epsilon_r = 52.249$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3578; ConvF(6.18, 6.18, 6.18); Calibrated: 6/21/2011
- Sensor-Surface: 4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE4 Sn852; Calibrated: 11/16/2011
- Phantom: SAM3; Type: SAM; Serial: TP-1597
- DASY52 52.8.0(692); SEMCAD X 14.6.4(4989)

Configuration/Body/Area Scan (8x12x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 0.067 mW/g


Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 4.371 V/m; Power Drift = 0.18 dB

Peak SAR (extrapolated) = 0.1540

SAR(1 g) = 0.078 mW/g; SAR(10 g) = 0.037 mW/g

Maximum value of SAR (measured) = 0.089 mW/g

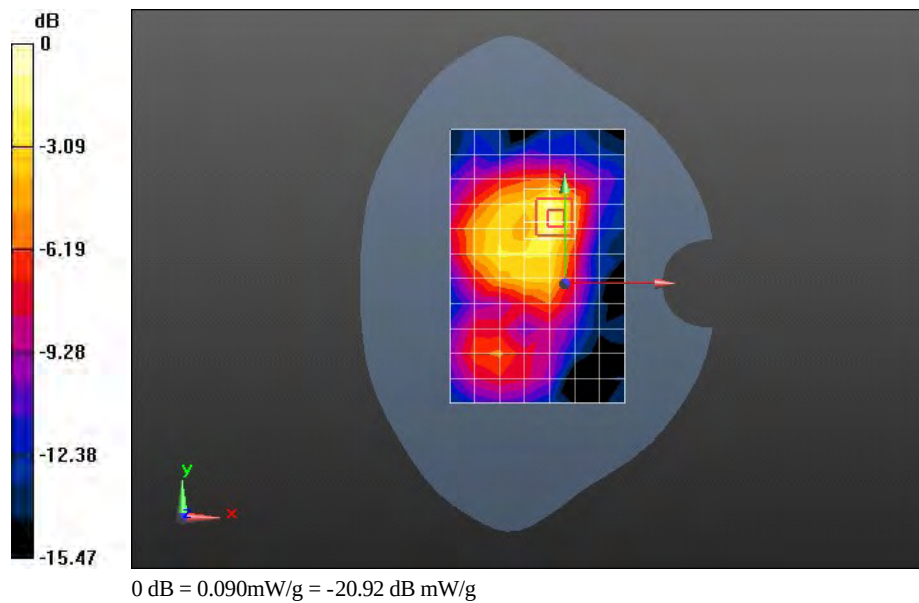

Test Laboratory: HUAWEI SAR Lab

U8665 WiFi 802.11b 11CH Left edge 10mm

DUT: U8665; Type: HSDPA/UMTS/GPRS/GSM/EDGE Mobile Phone with Bluetooth;; Serial: SAR2

Communication System: WiFi(802.11b/g/n); Frequency: 2462 MHz

Medium parameters used: $f = 2462$ MHz; $\sigma = 1.991$ mho/m; $\epsilon_r = 52.249$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3578; ConvF(6.18, 6.18, 6.18); Calibrated: 6/21/2011
- Sensor-Surface: 4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE4 Sn852; Calibrated: 11/16/2011
- Phantom: SAM3; Type: SAM; Serial: TP-1597
- DASY52 52.8.0(692); SEMCAD X 14.6.4(4989)

Configuration/Body/Area Scan (8x12x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 0.059 mW/g


Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 3.624 V/m; Power Drift = -0.10 dB

Peak SAR (extrapolated) = 0.2900

SAR(1 g) = 0.066 mW/g; SAR(10 g) = 0.026 mW/g

Maximum value of SAR (measured) = 0.074 mW/g

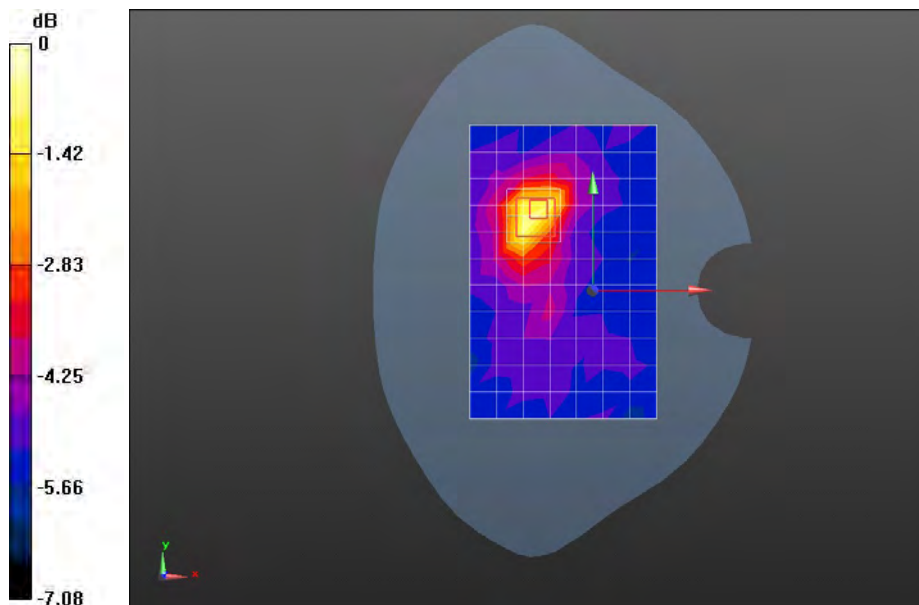

0 dB = 0.070mW/g = -23.10 dB mW/g

Test Laboratory: HUAWEI SAR Lab

U8665 WiFi 802.11b 11CH Top edge 10mm

DUT: U8665; Type: HSDPA/UMTS/GPRS/GSM/EDGE Mobile Phone with Bluetooth;; Serial: SAR2

Communication System: WiFi(802.11b/g/n); Frequency: 2462 MHz

Medium parameters used: $f = 2462$ MHz; $\sigma = 1.991$ mho/m; $\epsilon_r = 52.249$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3578; ConvF(6.18, 6.18, 6.18); Calibrated: 6/21/2011
- Sensor-Surface: 4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE4 Sn852; Calibrated: 11/16/2011
- Phantom: SAM3; Type: SAM; Serial: TP-1597
- DASY52 52.8.0(692); SEMCAD X 14.6.4(4989)

Configuration/Body/Area Scan (8x12x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 0.027 mW/g


Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 3.387 V/m; Power Drift = -0.13 dB

Peak SAR (extrapolated) = 0.1790

SAR(1 g) = 0.037 mW/g; SAR(10 g) = 0.011 mW/g

Maximum value of SAR (measured) = 0.028 mW/g

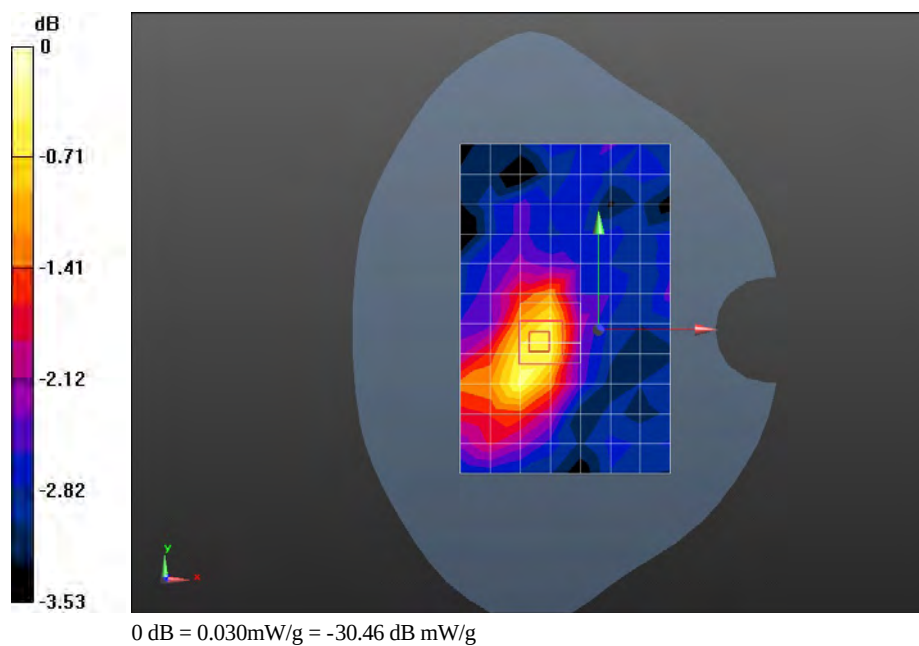

Test Laboratory: HUAWEI SAR Lab

U8665 WiFi 802.11b 11CH Towards Ground 10mm with battery SN-UAIBC20X03007197

DUT: U8665; Type: HSDPA/UMTS/GPRS/GSM/EDGE Mobile Phone with Bluetooth;; Serial: SAR2

Communication System: WiFi(802.11b/g/n); Frequency: 2462 MHz

Medium parameters used: $f = 2462$ MHz; $\sigma = 1.991$ mho/m; $\epsilon_r = 52.249$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3578; ConvF(6.18, 6.18, 6.18); Calibrated: 6/21/2011
- Sensor-Surface: 4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE4 Sn852; Calibrated: 11/16/2011
- Phantom: SAM3; Type: SAM; Serial: TP-1597
- DASY52 52.8.0(692); SEMCAD X 14.6.4(4989)

Configuration/Body/Area Scan (8x12x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 0.073 mW/g

Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 5.247 V/m; Power Drift = 0.17 dB

Peak SAR (extrapolated) = 0.1450

SAR(1 g) = 0.073 mW/g; SAR(10 g) = 0.034 mW/g

Maximum value of SAR (measured) = 0.085 mW/g


Configuration/Body/Zoom Scan (7x7x7)/Cube 1: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 5.247 V/m; Power Drift = 0.17 dB

Peak SAR (extrapolated) = 0.1000

SAR(1 g) = 0.053 mW/g; SAR(10 g) = 0.026 mW/g

Maximum value of SAR (measured) = 0.060 mW/g

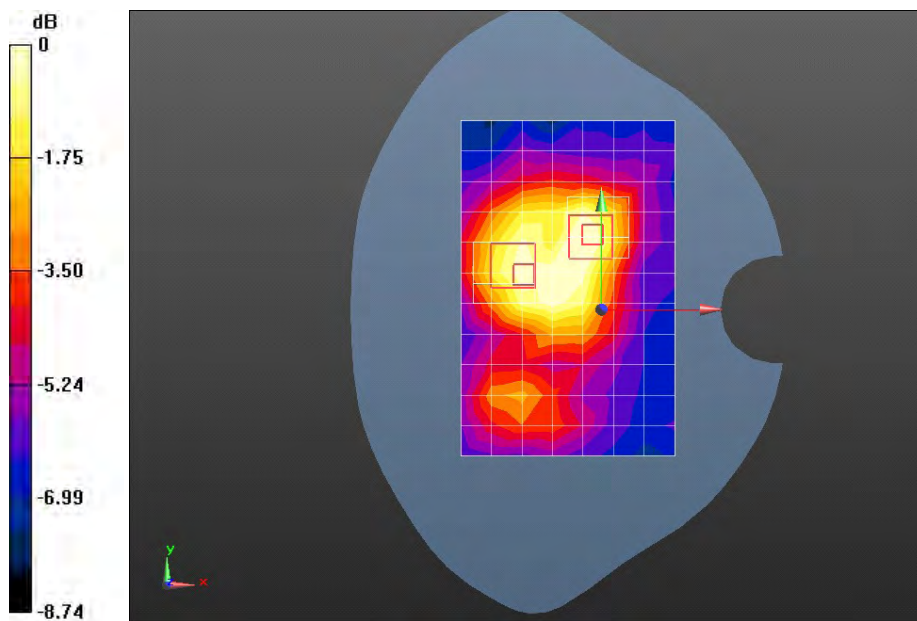

0 dB = 0.060mW/g = -24.44 dB mW/g

Test Laboratory: HUAWEI SAR Lab

U8665 WiFi 802.11b 11CH Towards Ground 10mm with battery SN-UNDC306X03000317

DUT: U8665; Type: HSDPA/UMTS/GPRS/GSM/EDGE Mobile Phone with Bluetooth;; Serial: SAR2

Communication System: WiFi(802.11b/g/n); Frequency: 2462 MHz

Medium parameters used: $f = 2462$ MHz; $\sigma = 1.991$ mho/m; $\epsilon_r = 52.249$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3578; ConvF(6.18, 6.18, 6.18); Calibrated: 6/21/2011
- Sensor-Surface: 4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE4 Sn852; Calibrated: 11/16/2011
- Phantom: SAM3; Type: SAM; Serial: TP-1597
- DASY52 52.8.0(692); SEMCAD X 14.6.4(4989)

Configuration/Body/Area Scan (8x12x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 0.072 mW/g


Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 4.585 V/m; Power Drift = -0.04 dB

Peak SAR (extrapolated) = 0.1550

SAR(1 g) = 0.077 mW/g; SAR(10 g) = 0.037 mW/g

Maximum value of SAR (measured) = 0.091 mW/g

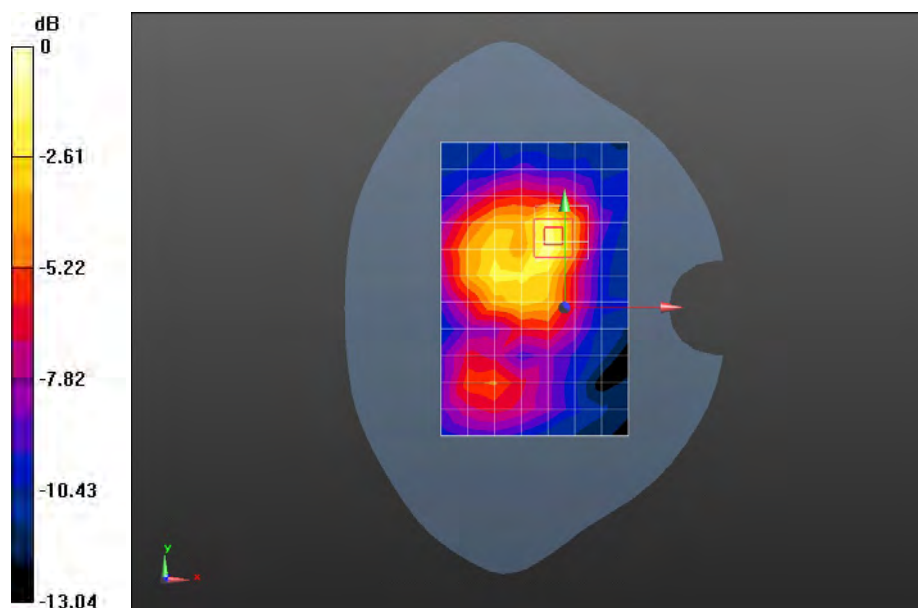

0 dB = 0.090mW/g = -20.92 dB mW/g

Test Laboratory: HUAWEI SAR Lab

U8665 WiFi 802.11b 11CH Towards Ground 10mm with battery SN-MHCBB066I44E1903**DUT: U8665; Type: HSDPA/UMTS/GPRS/GSM/EDGE Mobile Phone with Bluetooth;; Serial: SAR2**

Communication System: WiFi(802.11b/g/n); Frequency: 2462 MHz

Medium parameters used: $f = 2462$ MHz; $\sigma = 1.991$ mho/m; $\epsilon_r = 52.249$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3578; ConvF(6.18, 6.18, 6.18); Calibrated: 6/21/2011
- Sensor-Surface: 4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE4 Sn852; Calibrated: 11/16/2011
- Phantom: SAM3; Type: SAM; Serial: TP-1597
- DASY52 52.8.0(692); SEMCAD X 14.6.4(4989)

Configuration/Body/Area Scan (8x12x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 0.086 mW/g


Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 4.910 V/m; Power Drift = 0.03 dB

Peak SAR (extrapolated) = 0.1630

SAR(1 g) = 0.082 mW/g; SAR(10 g) = 0.039 mW/g

Maximum value of SAR (measured) = 0.094 mW/g

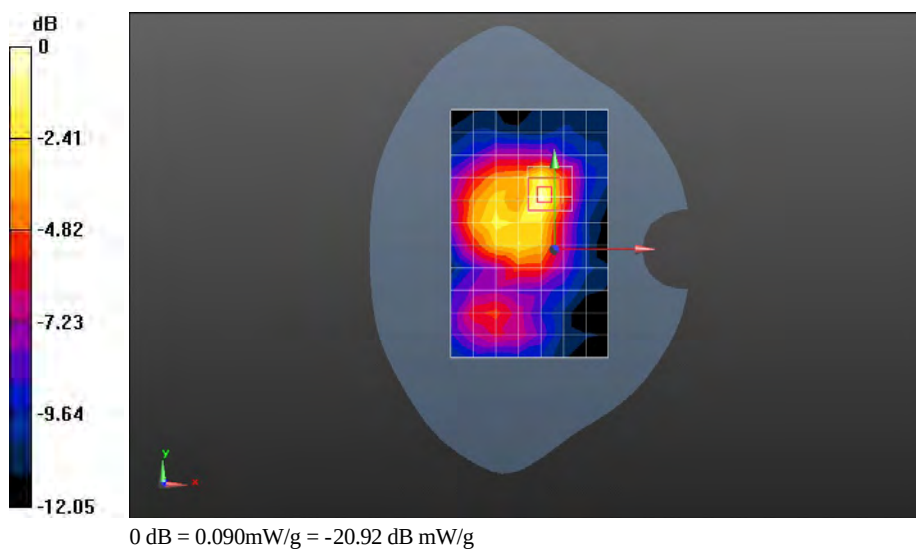

Test Laboratory: HUAWEI SAR Lab

U8665 WiFi 802.11b 11CH Towards Phantom 15mm

DUT: U8665; Type: HSDPA/UMTS/GPRS/GSM/EDGE Mobile Phone with Bluetooth;; Serial: SAR2

Communication System: WiFi(802.11b/g/n); Frequency: 2462 MHz

Medium parameters used: $f = 2462$ MHz; $\sigma = 1.991$ mho/m; $\epsilon_r = 52.249$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3578; ConvF(6.18, 6.18, 6.18); Calibrated: 6/21/2011
- Sensor-Surface: 4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE4 Sn852; Calibrated: 11/16/2011
- Phantom: SAM3; Type: SAM; Serial: TP-1597
- DASY52 52.8.0(692); SEMCAD X 14.6.4(4989)

Configuration/Body/Area Scan (8x12x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 0.00963 mW/g


Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 1.817 V/m; Power Drift = 0.09 dB

Peak SAR (extrapolated) = 0.0140

SAR(1 g) = 0.0057 mW/g; SAR(10 g) = 0.00315 mW/g

Maximum value of SAR (measured) = 0.010 mW/g

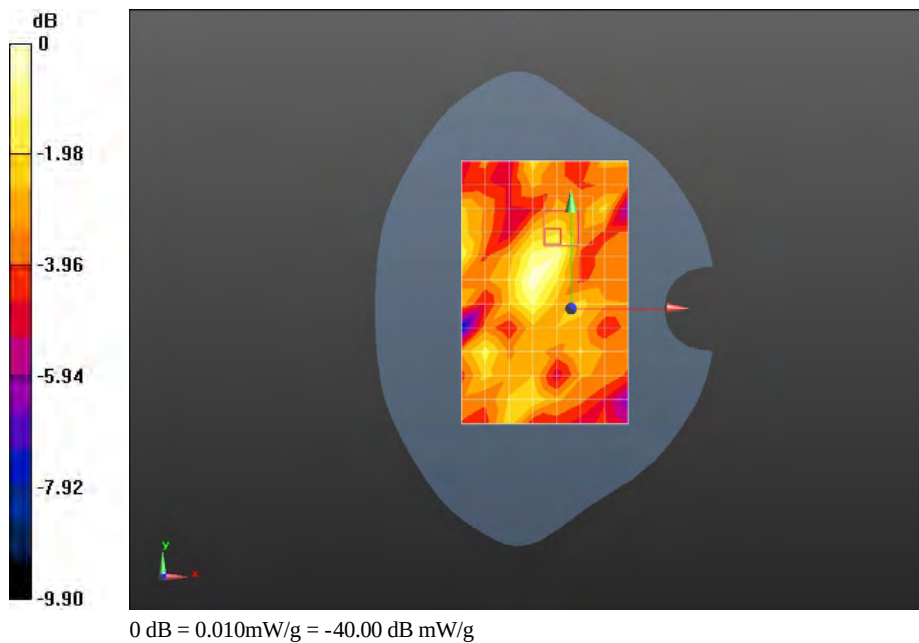

Test Laboratory: HUAWEI SAR Lab

U8665 WiFi 802.11b 11CH Towards Ground 15mm

DUT: U8665; Type: HSDPA/UMTS/GPRS/GSM/EDGE Mobile Phone with Bluetooth;; Serial: SAR2

Communication System: WiFi(802.11b/g/n); Frequency: 2462 MHz

Medium parameters used: $f = 2462$ MHz; $\sigma = 1.991$ mho/m; $\epsilon_r = 52.249$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3578; ConvF(6.18, 6.18, 6.18); Calibrated: 6/21/2011
- Sensor-Surface: 4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE4 Sn852; Calibrated: 11/16/2011
- Phantom: SAM3; Type: SAM; Serial: TP-1597
- DASY52 52.8.0(692); SEMCAD X 14.6.4(4989)

Configuration/Body/Area Scan (8x12x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 0.037 mW/g


Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 3.180 V/m; Power Drift = 0.18 dB

Peak SAR (extrapolated) = 0.0690

SAR(1 g) = 0.037 mW/g; SAR(10 g) = 0.020 mW/g

Maximum value of SAR (measured) = 0.042 mW/g

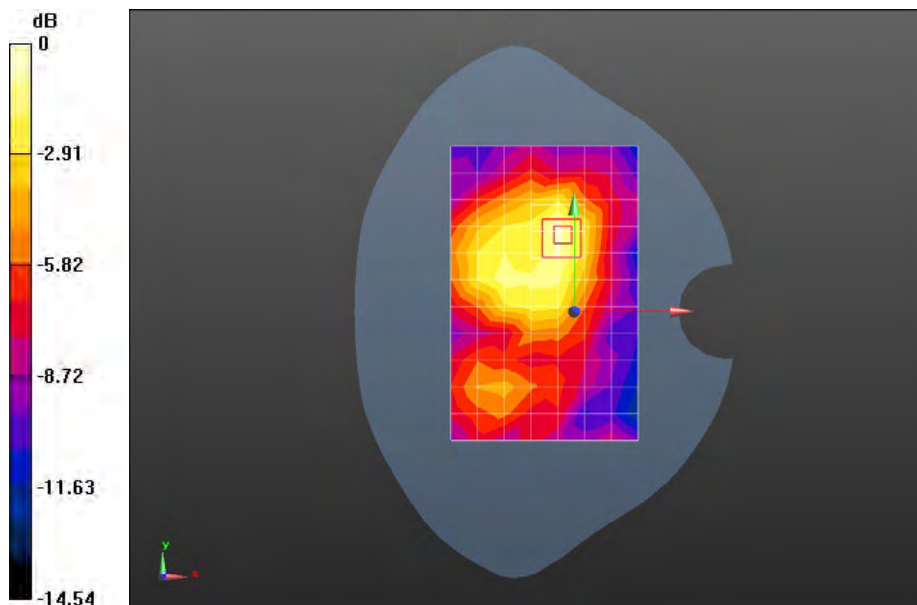

0 dB = 0.040mW/g = -27.96 dB mW/g

Test Laboratory: HUAWEI SAR Lab

U8665 WiFi 802.11b 11CH Towards Ground 15mm with battery SN-UAIBC20X03007197

DUT: U8665; Type: HSDPA/UMTS/GPRS/GSM/EDGE Mobile Phone with Bluetooth;; Serial: SAR2

Communication System: WiFi(802.11b/g/n); Frequency: 2462 MHz

Medium parameters used: $f = 2462$ MHz; $\sigma = 1.991$ mho/m; $\epsilon_r = 52.249$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3578; ConvF(6.18, 6.18, 6.18); Calibrated: 6/21/2011
- Sensor-Surface: 4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE4 Sn852; Calibrated: 11/16/2011
- Phantom: SAM3; Type: SAM; Serial: TP-1597
- DASY52 52.8.0(692); SEMCAD X 14.6.4(4989)

Configuration/Body/Area Scan (8x12x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 0.040 mW/g

Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 3.995 V/m; Power Drift = -0.15 dB

Peak SAR (extrapolated) = 0.1360

SAR(1 g) = 0.031 mW/g; SAR(10 g) = 0.014 mW/g

Maximum value of SAR (measured) = 0.037 mW/g


Configuration/Body/Zoom Scan (7x7x7)/Cube 1: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 3.995 V/m; Power Drift = -0.15 dB

Peak SAR (extrapolated) = 0.0850

SAR(1 g) = 0.024 mW/g; SAR(10 g) = 0.017 mW/g

Maximum value of SAR (measured) = 0.039 mW/g

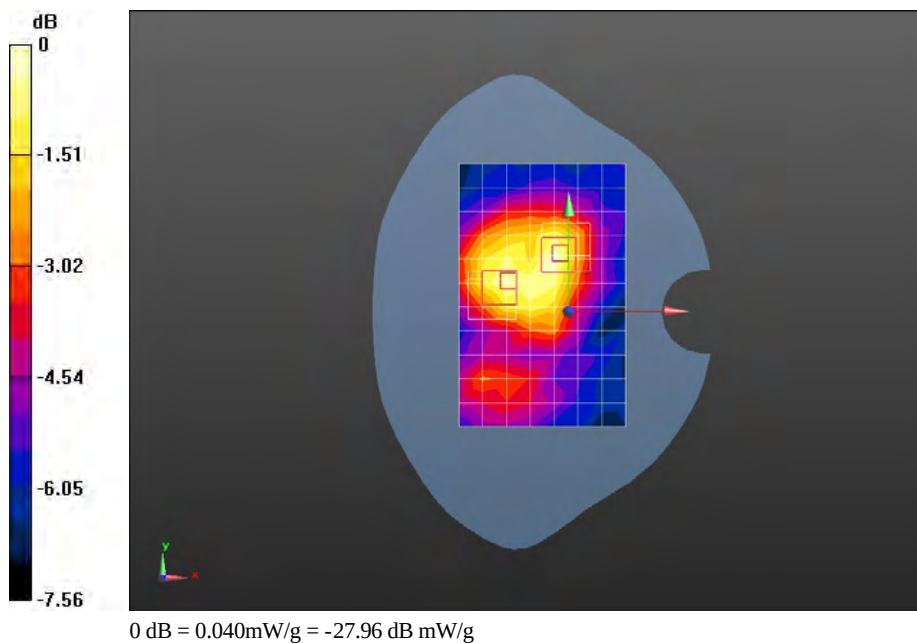

Test Laboratory: HUAWEI SAR Lab

U8665 WiFi 802.11b 11CH Towards Ground 15mm with battery SN-UNDC306X03000317

DUT: U8665; Type: HSDPA/UMTS/GPRS/GSM/EDGE Mobile Phone with Bluetooth;; Serial: SAR2

Communication System: WiFi(802.11b/g/n); Frequency: 2462 MHz

Medium parameters used: $f = 2462$ MHz; $\sigma = 1.991$ mho/m; $\epsilon_r = 52.249$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3578; ConvF(6.18, 6.18, 6.18); Calibrated: 6/21/2011
- Sensor-Surface: 4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE4 Sn852; Calibrated: 11/16/2011
- Phantom: SAM3; Type: SAM; Serial: TP-1597
- DASY52 52.8.0(692); SEMCAD X 14.6.4(4989)

Configuration/Body/Area Scan (8x12x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 0.033 mW/g


Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 3.667 V/m; Power Drift = 0.06 dB

Peak SAR (extrapolated) = 0.1050

SAR(1 g) = 0.022 mW/g; SAR(10 g) = 0.00913 mW/g

Maximum value of SAR (measured) = 0.019 mW/g

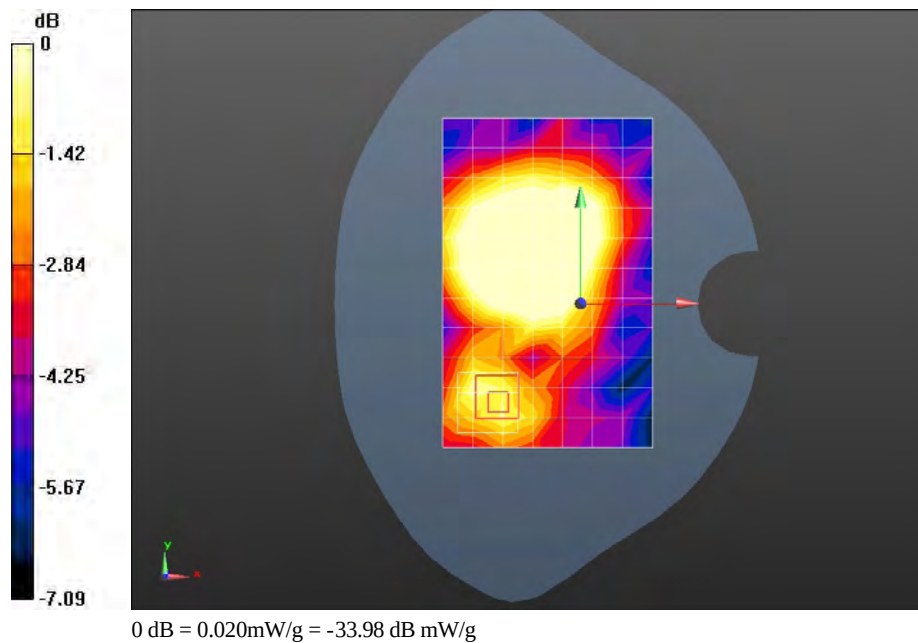

Test Laboratory: HUAWEI SAR Lab

U8665 WiFi 802.11b 11CH Towards Ground 15mm with battery SN-MHCBB066I44E1903

DUT: U8665; Type: HSDPA/UMTS/GPRS/GSM/EDGE Mobile Phone with Bluetooth;; Serial: SAR2

Communication System: WiFi(802.11b/g/n); Frequency: 2462 MHz

Medium parameters used: $f = 2462$ MHz; $\sigma = 1.991$ mho/m; $\epsilon_r = 52.249$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3578; ConvF(6.18, 6.18, 6.18); Calibrated: 6/21/2011
- Sensor-Surface: 4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE4 Sn852; Calibrated: 11/16/2011
- Phantom: SAM3; Type: SAM; Serial: TP-1597
- DASY52 52.8.0(692); SEMCAD X 14.6.4(4989)

Configuration/Body/Area Scan (8x12x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 0.038 mW/g

Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 3.857 V/m; Power Drift = -0.0098 dB

Peak SAR (extrapolated) = 0.0620

SAR(1 g) = 0.035 mW/g; SAR(10 g) = 0.018 mW/g

Maximum value of SAR (measured) = 0.040 mW/g

Configuration/Body/Zoom Scan (7x7x7)/Cube 1: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 3.857 V/m; Power Drift = -0.0098 dB

Peak SAR (extrapolated) = 0.1000

SAR(1 g) = 0.029 mW/g; SAR(10 g) = 0.013 mW/g

Maximum value of SAR (measured) = 0.036 mW/g

