



Appendix B. SAR Measurement Plots

Table of contents
GSM850 Head
GSM850 Body
GSM1900 Head
GSM1900 Body
WCDMA Band V Head
WCDMA Band V Body
WiFi 802.11b Head
WiFi 802.11b Body

Test Laboratory: HUAWEI SAR Lab

U9202L-1 GSM850 190CH Left hand touch cheek**DUT: U9202L-1; Type: Ascend P1; HSPA+/HSUPA/HSDPA/UMTS/GSM/GPRS/EDGE Mobile Phone with Bluetooth; Serial: SAR1**

Communication System: HW-GSM/GPRS/EDGE 1TS; Frequency: 836.6 MHz

Medium parameters used: $f = 837$ MHz; $\sigma = 0.928$ mho/m; $\epsilon_r = 41.212$; $\rho = 1000$ kg/m³

Phantom section: Left Section

DASY Configuration:

- Probe: EX3DV4 - SN3661; ConvF(9.46, 9.46, 9.46); Calibrated: 1/27/2012;
- Sensor-Surface: 4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE4 Sn679; Calibrated: 12/23/2011
- Phantom: SAM 2; Type: SAM; Serial: TP-1474
- DASY52 52.8.1(838); SEMCAD X 14.6.6(6824)

Configuration/Head/Area Scan (8x12x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 0.482 W/kg


Configuration/Head/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 7.430 V/m; Power Drift = 0.10 dB

Peak SAR (extrapolated) = 0.607 mW/g

SAR(1 g) = 0.477 mW/g; SAR(10 g) = 0.357 mW/g

Maximum value of SAR (measured) = 0.506 W/kg

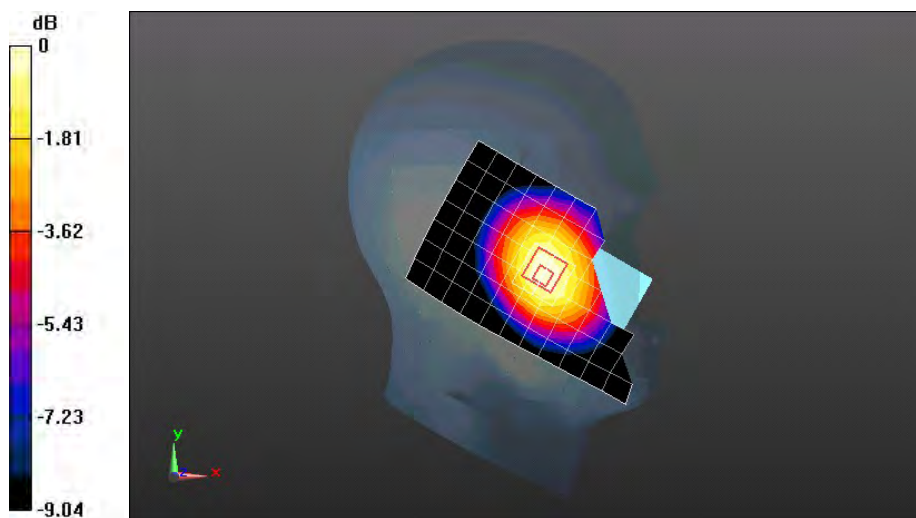

0 dB = 0.506 W/kg = -5.92 dB W/kg



Test Laboratory: HUAWEI SAR Lab

U9202L-1 GSM850 190CH Left hand tilt 15 degree

DUT: U9202L-1; Type: Ascend P1; HSPA+/HSUPA/HSDPA/UMTS/GSM/GPRS/EDGE Mobile Phone with Bluetooth; Serial: SAR1

Communication System: HW-GSM/GPRS/EDGE 1TS; Frequency: 836.6 MHz

Medium parameters used: $f = 837$ MHz; $\sigma = 0.928$ mho/m; $\epsilon_r = 41.212$; $\rho = 1000$ kg/m³

Phantom section: Left Section

DASY Configuration:

- Probe: EX3DV4 - SN3661; ConvF(9.46, 9.46, 9.46); Calibrated: 1/27/2012;
- Sensor-Surface: 4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE4 Sn679; Calibrated: 12/23/2011
- Phantom: SAM 2; Type: SAM; Serial: TP-1474
- DASY52 52.8.1(838); SEMCAD X 14.6.5(6469)

Configuration/Head/Area Scan (8x12x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 0.308 mW/g


Configuration/Head/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 13.137 V/m; Power Drift = -0.15 dB

Peak SAR (extrapolated) = 0.355 mW/g

SAR(1 g) = 0.292 mW/g; SAR(10 g) = 0.225 mW/g

Maximum value of SAR (measured) = 0.306 mW/g

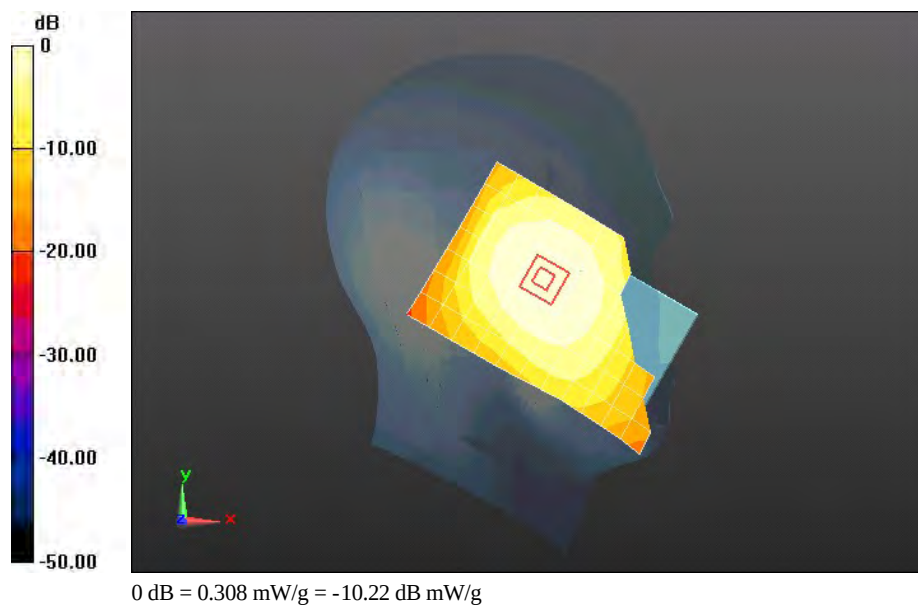

Test Laboratory: HUAWEI SAR Lab

U9202L-1 GSM850 190CH Right hand touch cheek

DUT: U9202L-1; Type: Ascend P1; HSPA+/HSUPA/HSDPA/UMTS/GSM/GPRS/EDGE Mobile Phone with Bluetooth; Serial: SAR1

Communication System: HW-GSM/GPRS/EDGE 1TS; Frequency: 836.6 MHz

Medium parameters used: $f = 837$ MHz; $\sigma = 0.928$ mho/m; $\epsilon_r = 41.212$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY Configuration:

- Probe: EX3DV4 - SN3661; ConvF(9.46, 9.46, 9.46); Calibrated: 1/27/2012;
- Sensor-Surface: 4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE4 Sn679; Calibrated: 12/23/2011
- Phantom: SAM 2; Type: SAM; Serial: TP-1474
- DASY52 52.8.1(838); SEMCAD X 14.6.5(6469)

Configuration/Head/Area Scan (8x12x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 0.463 mW/g


Configuration/Head/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 8.272 V/m; Power Drift = 0.19 dB

Peak SAR (extrapolated) = 0.546 mW/g

SAR(1 g) = 0.447 mW/g; SAR(10 g) = 0.341 mW/g

Maximum value of SAR (measured) = 0.472 mW/g

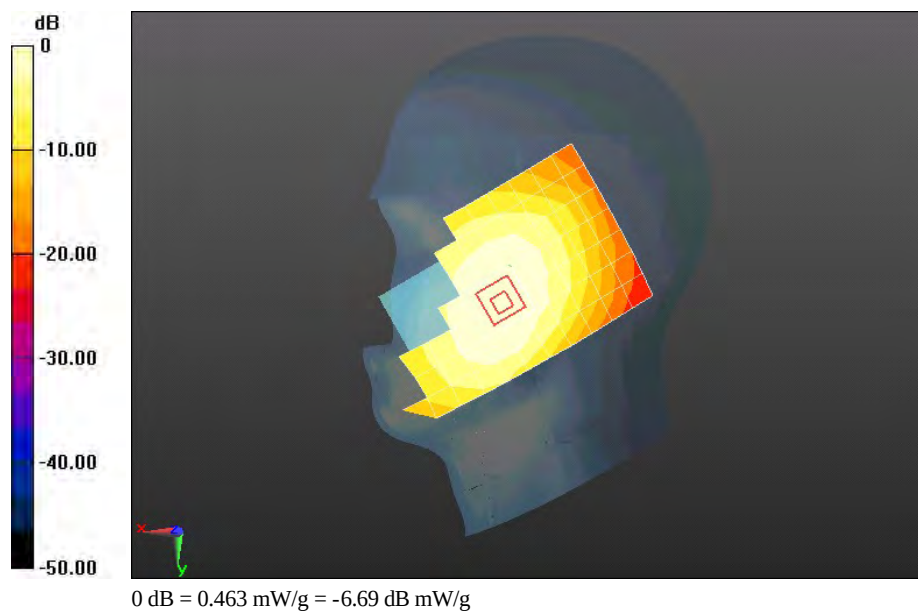

Test Laboratory: HUAWEI SAR Lab

U9202L-1 GSM850 190CH Right hand tilt 15 degree

DUT: U9202L-1; Type: Ascend P1; HSPA+/HSUPA/HSDPA/UMTS/GSM/GPRS/EDGE Mobile Phone with Bluetooth; Serial: SAR1

Communication System: HW-GSM/GPRS/EDGE 1TS; Frequency: 836.6 MHz

Medium parameters used: $f = 837$ MHz; $\sigma = 0.928$ mho/m; $\epsilon_r = 41.212$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY Configuration:

- Probe: EX3DV4 - SN3661; ConvF(9.46, 9.46, 9.46); Calibrated: 1/27/2012;
- Sensor-Surface: 4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE4 Sn679; Calibrated: 12/23/2011
- Phantom: SAM 2; Type: SAM; Serial: TP-1474
- DASY52 52.8.1(838); SEMCAD X 14.6.5(6469)

Configuration/Head/Area Scan (8x12x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 0.284 mW/g


Configuration/Head/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 11.767 V/m; Power Drift = -0.10 dB

Peak SAR (extrapolated) = 0.334 mW/g

SAR(1 g) = 0.273 mW/g; SAR(10 g) = 0.213 mW/g

Maximum value of SAR (measured) = 0.286 mW/g

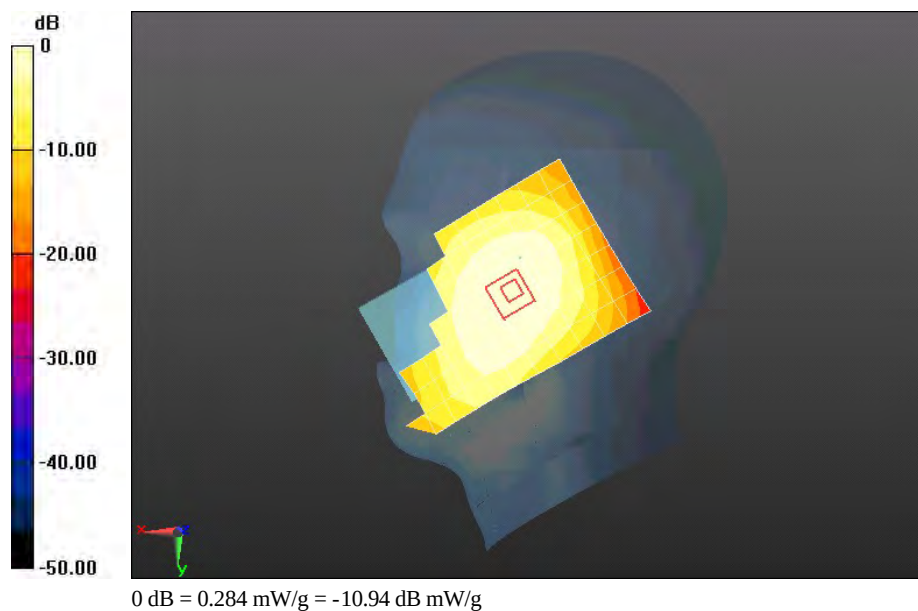

Test Laboratory: HUAWEI SAR Lab

U9202L-1 GSM850 GPRS 1ST 190CH Towards Phantom 10mm

DUT: U9202L-1; Type: Ascend P1; HSPA+/HSUPA/HSDPA/UMTS/GSM/GPRS/EDGE Mobile Phone with Bluetooth; Serial: SAR1

Communication System: HW-GSM/GPRS/EDGE 1TS; Frequency: 836.6 MHz

Medium parameters used: $f = 837$ MHz; $\sigma = 0.978$ mho/m; $\epsilon_r = 52.934$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3661; ConvF(9.64, 9.64, 9.64); Calibrated: 1/27/2012;
- Sensor-Surface: 4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE4 Sn679; Calibrated: 12/23/2011
- Phantom: SAM1; Type: SAM; Serial: TP-1475
- DASY52 52.8.1(838); SEMCAD X 14.6.5(6469)

Configuration/Body/Area Scan (8x13x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 0.620 mW/g


Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 24.758 V/m; Power Drift = -0.01 dB

Peak SAR (extrapolated) = 0.747 mW/g

SAR(1 g) = 0.590 mW/g; SAR(10 g) = 0.457 mW/g

Maximum value of SAR (measured) = 0.700 mW/g

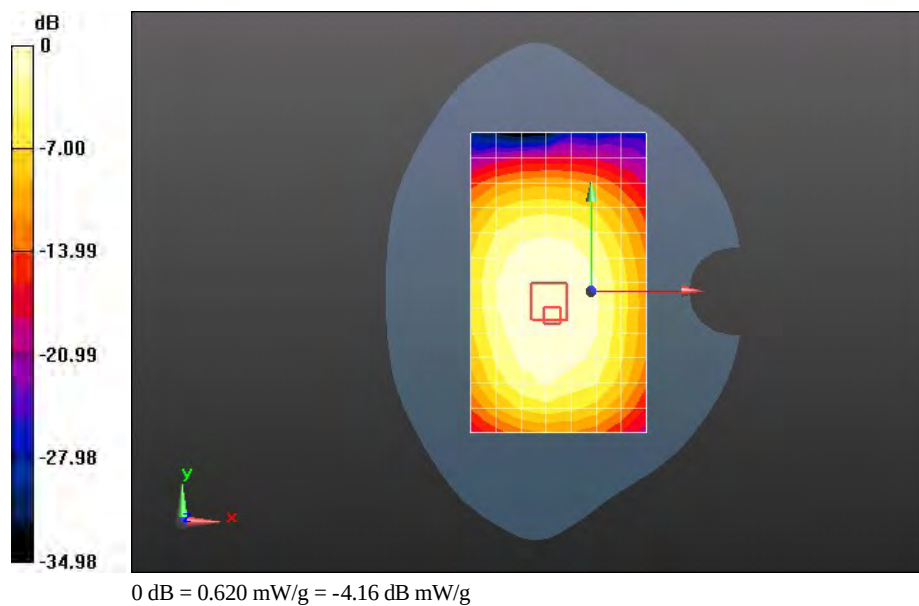

Test Laboratory: HUAWEI SAR Lab

U9202L-1 GSM850 GPRS 2ST 190CH Towards Phantom 10mm

DUT: U9202L-1; Type: Ascend P1; HSPA+/HSUPA/HSDPA/UMTS/GSM/GPRS/EDGE Mobile Phone with Bluetooth; Serial: SAR1

Communication System: HW-GSM/GPRS/EDGE 2TS; Frequency: 836.6 MHz

Medium parameters used: $f = 837$ MHz; $\sigma = 0.978$ mho/m; $\epsilon_r = 52.934$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3661; ConvF(9.64, 9.64, 9.64); Calibrated: 1/27/2012;
- Sensor-Surface: 4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE4 Sn679; Calibrated: 12/23/2011
- Phantom: SAM1; Type: SAM; Serial: TP-1475
- DASY52 52.8.1(838); SEMCAD X 14.6.5(6469)

Configuration/Body/Area Scan (8x13x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 0.614 mW/g


Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 24.989 V/m; Power Drift = -0.13 dB

Peak SAR (extrapolated) = 0.714 mW/g

SAR(1 g) = 0.588 mW/g; SAR(10 g) = 0.455 mW/g

Maximum value of SAR (measured) = 0.613 mW/g

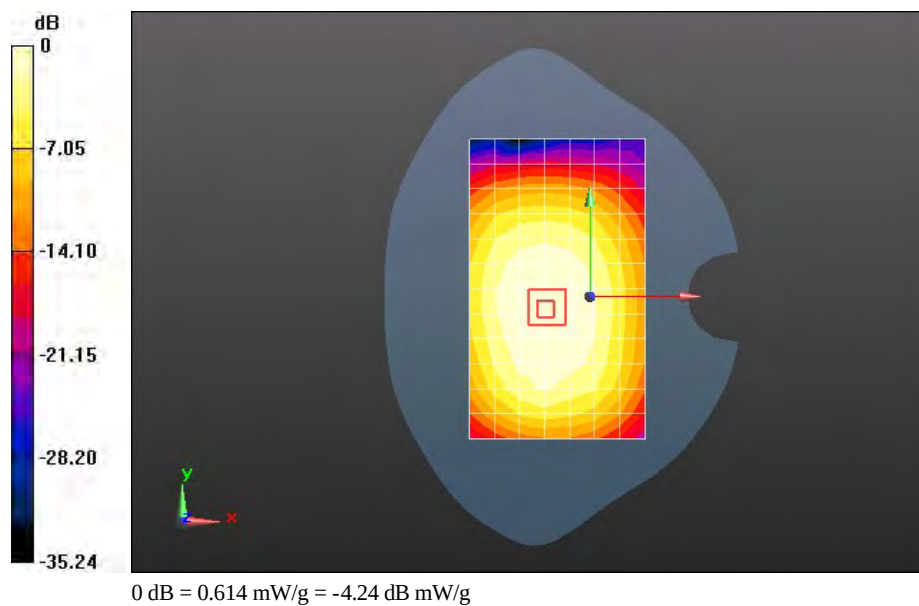

Test Laboratory: HUAWEI SAR Lab

U9202L-1 GSM850 GPRS 1ST 128CH Towards Ground 10mm

DUT: U9202L-1; Type: Ascend P1; HSPA+/HSUPA/HSDPA/UMTS/GSM/GPRS/EDGE Mobile Phone with Bluetooth; Serial: SAR1

Communication System: HW-GSM/GPRS/EDGE 1TS; Frequency: 824.2 MHz

Medium parameters used (interpolated): $f = 824.2$ MHz; $\sigma = 0.963$ mho/m; $\epsilon_r = 52.95$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3661; ConvF(9.64, 9.64, 9.64); Calibrated: 1/27/2012;
- Sensor-Surface: 4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE4 Sn679; Calibrated: 12/23/2011
- Phantom: SAM1; Type: SAM; Serial: TP-1475
- DASY52 52.8.1(838); SEMCAD X 14.6.5(6469)

Configuration/Body/Area Scan (8x13x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.718 mW/g

Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm


Reference Value = 27.109 V/m; Power Drift = -0.04 dB

Peak SAR (extrapolated) = 0.842 mW/g

SAR(1 g) = 0.688 mW/g; SAR(10 g) = 0.532 mW/g

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.719 mW/g

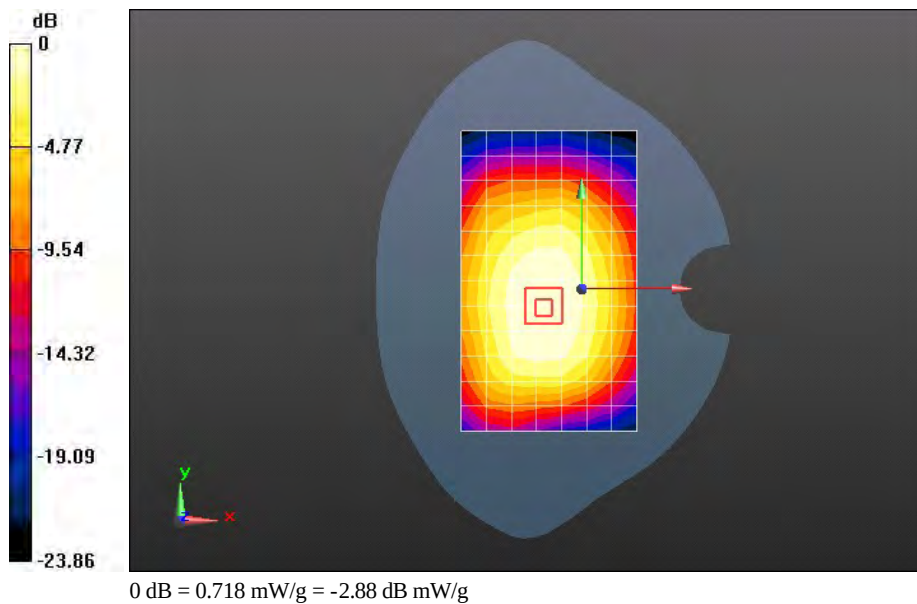

Test Laboratory: HUAWEI SAR Lab

U9202L-1 GSM850 GPRS 1ST 190CH Towards Ground 10mm

DUT: U9202L-1; Type: Ascend P1; HSPA+/HSUPA/HSDPA/UMTS/GSM/GPRS/EDGE Mobile Phone with Bluetooth; Serial: SAR1

Communication System: HW-GSM/GPRS/EDGE 1TS; Frequency: 836.6 MHz

Medium parameters used: $f = 837$ MHz; $\sigma = 0.98$ mho/m; $\epsilon_r = 52.904$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3661; ConvF(9.64, 9.64, 9.64); Calibrated: 1/27/2012;
- Sensor-Surface: 4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE4 Sn679; Calibrated: 12/23/2011
- Phantom: SAM1; Type: SAM; Serial: TP-1475
- DASY52 52.8.1(838); SEMCAD X 14.6.5(6469)

Configuration/Body/Area Scan (8x13x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 0.843 mW/g


Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 29.107 V/m; Power Drift = -0.03 dB

Peak SAR (extrapolated) = 0.976 mW/g

SAR(1 g) = 0.805 mW/g; SAR(10 g) = 0.622 mW/g

Maximum value of SAR (measured) = 0.844 mW/g

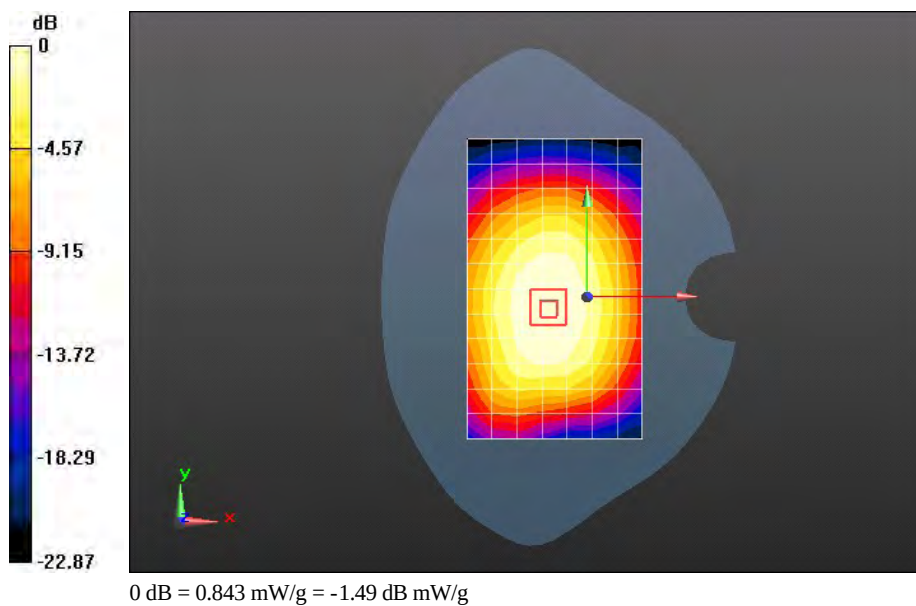

Test Laboratory: HUAWEI SAR Lab

U9202L-1 GSM850 GPRS 1ST 251CH Towards Ground 10mm

DUT: U9202L-1; Type: Ascend P1; HSPA+/HSUPA/HSDPA/UMTS/GSM/GPRS/EDGE Mobile Phone with Bluetooth; Serial: SAR1

Communication System: HW-GSM/GPRS/EDGE 1TS; Frequency: 848.8 MHz

Medium parameters used: $f = 849$ MHz; $\sigma = 1$ mho/m; $\epsilon_r = 52.583$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3661; ConvF(9.64, 9.64, 9.64); Calibrated: 1/27/2012;
- Sensor-Surface: 4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE4 Sn679; Calibrated: 12/23/2011
- Phantom: SAM1; Type: SAM; Serial: TP-1475
- DASY52 52.8.1(838); SEMCAD X 14.6.5(6469)

Configuration/Body/Area Scan (8x13x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 0.814 mW/g


Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 28.346 V/m; Power Drift = 0.02 dB

Peak SAR (extrapolated) = 0.967 mW/g

SAR(1 g) = 0.782 mW/g; SAR(10 g) = 0.601 mW/g

Maximum value of SAR (measured) = 0.818 mW/g

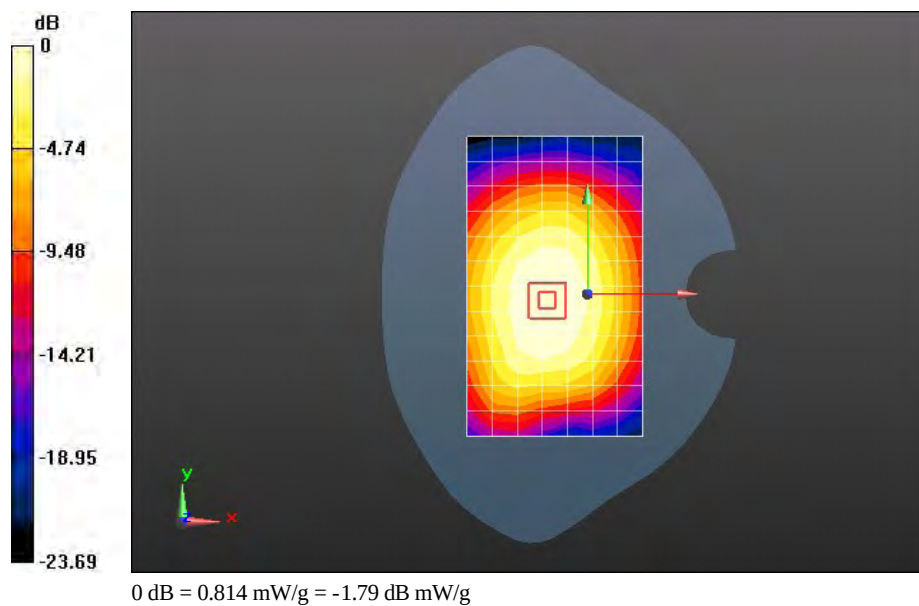

Test Laboratory: HUAWEI SAR Lab

U9202L-1 GSM850 GPRS 1ST 190CH Left edge 10mm

DUT: U9202L-1; Type: Ascend P1; HSPA+/HSUPA/HSDPA/UMTS/GSM/GPRS/EDGE Mobile Phone with Bluetooth; Serial: SAR1

Communication System: HW-GSM/GPRS/EDGE 1TS; Frequency: 836.6 MHz

Medium parameters used: $f = 837$ MHz; $\sigma = 0.98$ mho/m; $\epsilon_r = 52.904$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3661; ConvF(9.64, 9.64, 9.64); Calibrated: 1/27/2012;
- Sensor-Surface: 4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE4 Sn679; Calibrated: 12/23/2011
- Phantom: SAM1; Type: SAM; Serial: TP-1475
- DASY52 52.8.1(838); SEMCAD X 14.6.5(6469)

Configuration/Body/Area Scan (8x13x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 0.717 mW/g


Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 26.215 V/m; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 0.927 mW/g

SAR(1 g) = 0.678 mW/g; SAR(10 g) = 0.475 mW/g

Maximum value of SAR (measured) = 0.726 mW/g

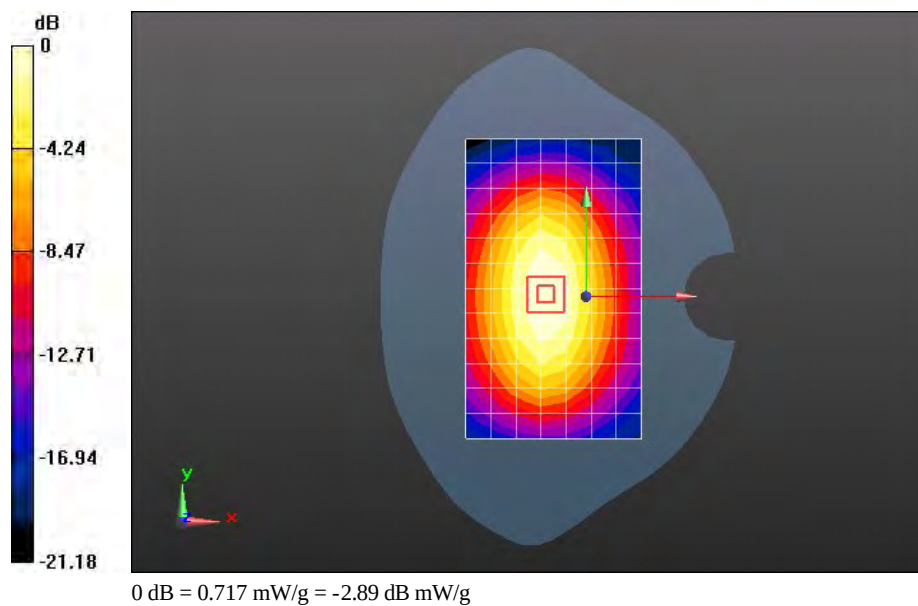

Test Laboratory: HUAWEI SAR Lab

U9202L-1 GSM850 GPRS 1ST 190CH Right edge 10mm

DUT: U9202L-1; Type: Ascend P1; HSPA+/HSUPA/HSDPA/UMTS/GSM/GPRS/EDGE Mobile Phone with Bluetooth; Serial: SAR1

Communication System: HW-GSM/GPRS/EDGE 1TS; Frequency: 836.6 MHz

Medium parameters used: $f = 837$ MHz; $\sigma = 0.98$ mho/m; $\epsilon_r = 52.904$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3661; ConvF(9.64, 9.64, 9.64); Calibrated: 1/27/2012;
- Sensor-Surface: 4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE4 Sn679; Calibrated: 12/23/2011
- Phantom: SAM1; Type: SAM; Serial: TP-1475
- DASY52 52.8.1(838); SEMCAD X 14.6.5(6469)

Configuration/Body/Area Scan (8x13x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 0.625 mW/g


Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 22.808 V/m; Power Drift = 0.05 dB

Peak SAR (extrapolated) = 0.813 mW/g

SAR(1 g) = 0.599 mW/g; SAR(10 g) = 0.421 mW/g

Maximum value of SAR (measured) = 0.640 mW/g

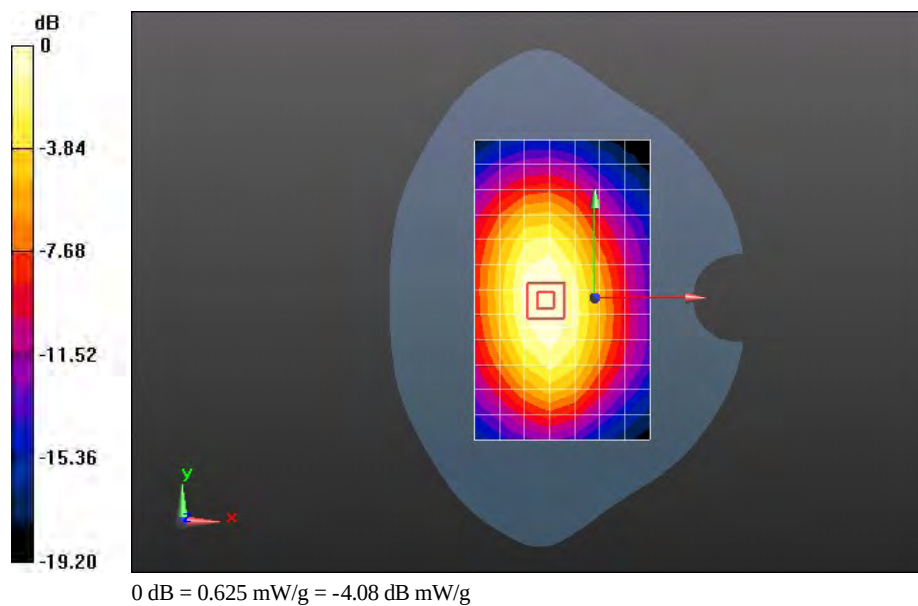

Test Laboratory: HUAWEI SAR Lab

U9202L-1 GSM850 GPRS 1ST 190CH Bottom edge 10mm

DUT: U9202L-1; Type: Ascend P1; HSPA+/HSUPA/HSDPA/UMTS/GSM/GPRS/EDGE Mobile Phone with Bluetooth; Serial: SAR1

Communication System: HW-GSM/GPRS/EDGE 1TS; Frequency: 836.6 MHz

Medium parameters used: $f = 837$ MHz; $\sigma = 0.98$ mho/m; $\epsilon_r = 52.904$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3661; ConvF(9.64, 9.64, 9.64); Calibrated: 1/27/2012;
- Sensor-Surface: 4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE4 Sn679; Calibrated: 12/23/2011
- Phantom: SAM1; Type: SAM; Serial: TP-1475
- DASY52 52.8.1(838); SEMCAD X 14.6.5(6469)

Configuration/Body/Area Scan (8x13x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 0.0627 mW/g


Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 6.784 V/m; Power Drift = -0.12 dB

Peak SAR (extrapolated) = 0.107 mW/g

SAR(1 g) = 0.066 mW/g; SAR(10 g) = 0.038 mW/g

Maximum value of SAR (measured) = 0.0713 mW/g

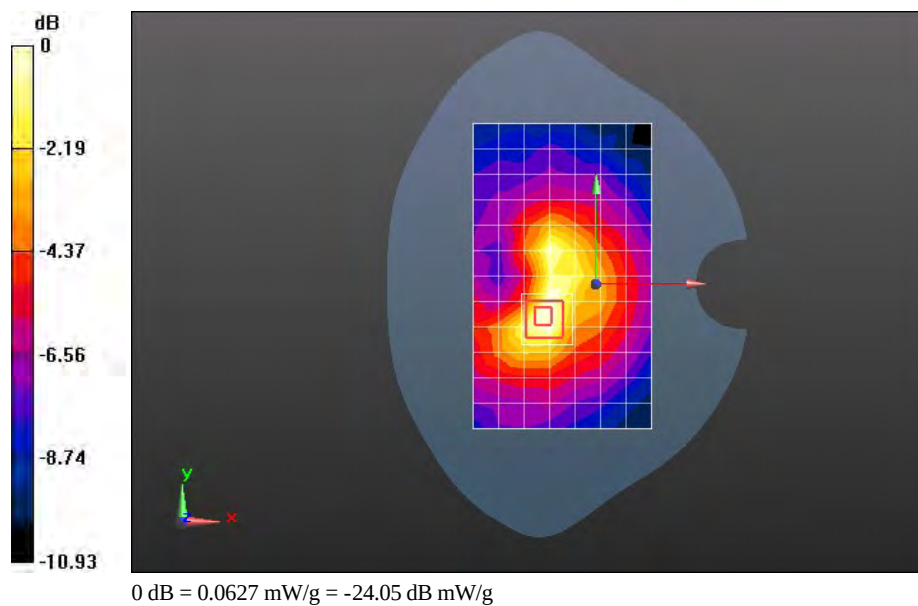

Test Laboratory: HUAWEI SAR Lab

U9202L-1 GSM850 EGPRS 1ST 128CH Towards Ground 10mm

DUT: U9202L-1; Type: Ascend P1; HSPA+/HSUPA/HSDPA/UMTS/GSM/GPRS/EDGE Mobile Phone with Bluetooth; Serial: SAR1

Communication System: HW-GSM/GPRS/EDGE 1TS; Frequency: 824.2 MHz

Medium parameters used (interpolated): $f = 824.2$ MHz; $\sigma = 0.963$ mho/m; $\epsilon_r = 52.95$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3661; ConvF(9.64, 9.64, 9.64); Calibrated: 1/27/2012;
- Sensor-Surface: 4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE4 Sn679; Calibrated: 12/23/2011
- Phantom: SAM1; Type: SAM; Serial: TP-1475
- DASY52 52.8.1(838); SEMCAD X 14.6.5(6469)

Configuration/Body/Area Scan (8x13x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.703 mW/g


Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 26.630 V/m; Power Drift = -0.07 dB

Peak SAR (extrapolated) = 0.818 mW/g

SAR(1 g) = 0.670 mW/g; SAR(10 g) = 0.517 mW/g

[Info: Interpolated medium parameters used for SAR evaluation.](#)

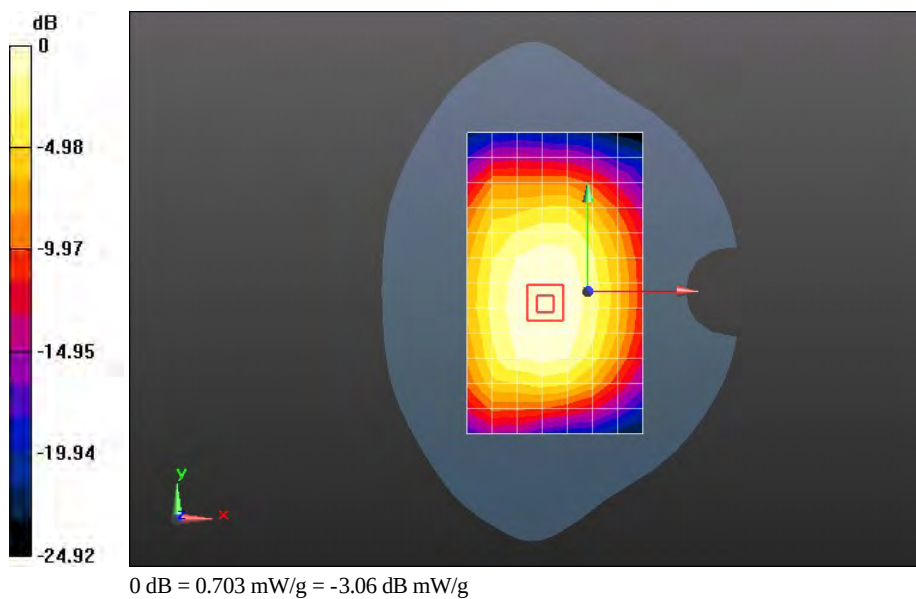

Test Laboratory: HUAWEI SAR Lab

U9202L-1 GSM850 EGPRS 1ST 190CH Towards Ground 10mm

DUT: U9202L-1; Type: Ascend P1; HSPA+/HSUPA/HSDPA/UMTS/GSM/GPRS/EDGE Mobile Phone with Bluetooth; Serial: SAR1

Communication System: HW-GSM/GPRS/EDGE 1TS; Frequency: 836.6 MHz

Medium parameters used: $f = 837$ MHz; $\sigma = 0.98$ mho/m; $\epsilon_r = 52.904$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3661; ConvF(9.64, 9.64, 9.64); Calibrated: 1/27/2012;
- Sensor-Surface: 4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE4 Sn679; Calibrated: 12/23/2011
- Phantom: SAM1; Type: SAM; Serial: TP-1475
- DASY52 52.8.1(838); SEMCAD X 14.6.5(6469)

Configuration/Body/Area Scan (8x13x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 0.878 mW/g


Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 29.675 V/m; Power Drift = -0.09 dB

Peak SAR (extrapolated) = 1.001 mW/g

SAR(1 g) = 0.833 mW/g; SAR(10 g) = 0.645 mW/g

Maximum value of SAR (measured) = 0.870 mW/g

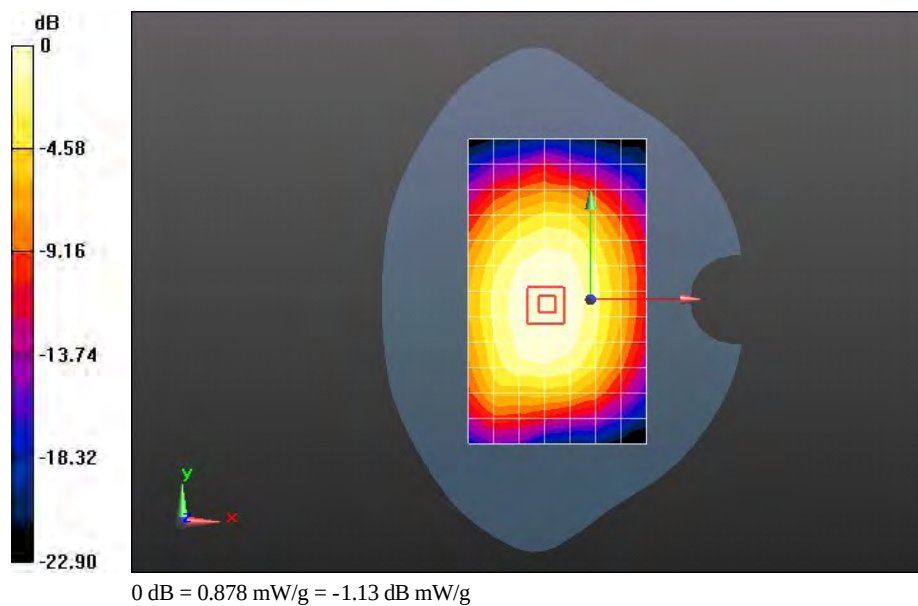

Test Laboratory: HUAWEI SAR Lab

U9202L-1 GSM850 EGPRS 1ST 251CH Towards Ground 10mm

DUT: U9202L-1; Type: Ascend P1; HSPA+/HSUPA/HSDPA/UMTS/GSM/GPRS/EDGE Mobile Phone with Bluetooth; Serial: SAR1

Communication System: HW-GSM/GPRS/EDGE 1TS; Frequency: 848.8 MHz

Medium parameters used: $f = 849$ MHz; $\sigma = 1$ mho/m; $\epsilon_r = 52.583$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3661; ConvF(9.64, 9.64, 9.64); Calibrated: 1/27/2012;
- Sensor-Surface: 4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE4 Sn679; Calibrated: 12/23/2011
- Phantom: SAM1; Type: SAM; Serial: TP-1475
- DASY52 52.8.1(838); SEMCAD X 14.6.5(6469)

Configuration/Body/Area Scan (8x13x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 0.831 mW/g


Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 28.294 V/m; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 0.972 mW/g

SAR(1 g) = 0.797 mW/g; SAR(10 g) = 0.614 mW/g

Maximum value of SAR (measured) = 0.834 mW/g

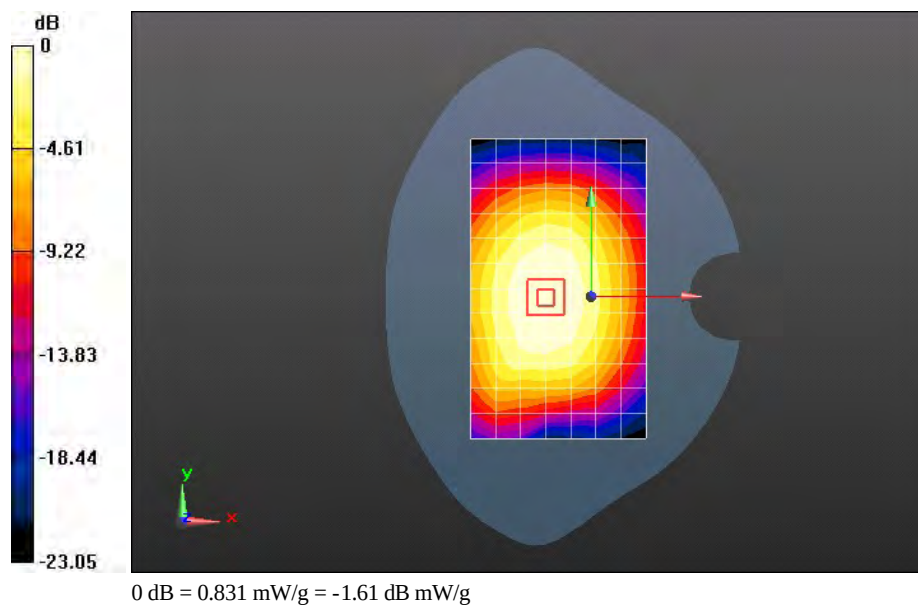

Test Laboratory: HUAWEI SAR Lab

U9202L-1 GSM850 EGPRS 2ST 128CH Towards Ground 10mm

DUT: U9202L-1; Type: Ascend P1; HSPA+/HSUPA/HSDPA/UMTS/GSM/GPRS/EDGE Mobile Phone with Bluetooth; Serial: SAR1

Communication System: HW-GSM/GPRS/EDGE 2TS; Frequency: 824.2 MHz

Medium parameters used (interpolated): $f = 824.2$ MHz; $\sigma = 0.963$ mho/m; $\epsilon_r = 52.95$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3661; ConvF(9.64, 9.64, 9.64); Calibrated: 1/27/2012;
- Sensor-Surface: 4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE4 Sn679; Calibrated: 12/23/2011
- Phantom: SAM1; Type: SAM; Serial: TP-1475
- DASY52 52.8.1(838); SEMCAD X 14.6.5(6469)

Configuration/Body/Area Scan (8x13x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.620 mW/g

Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm


Reference Value = 26.780 V/m; Power Drift = -0.07 dB

Peak SAR (extrapolated) = 0.695 mW/g

SAR(1 g) = 0.559 mW/g; SAR(10 g) = 0.428 mW/g

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.587 mW/g

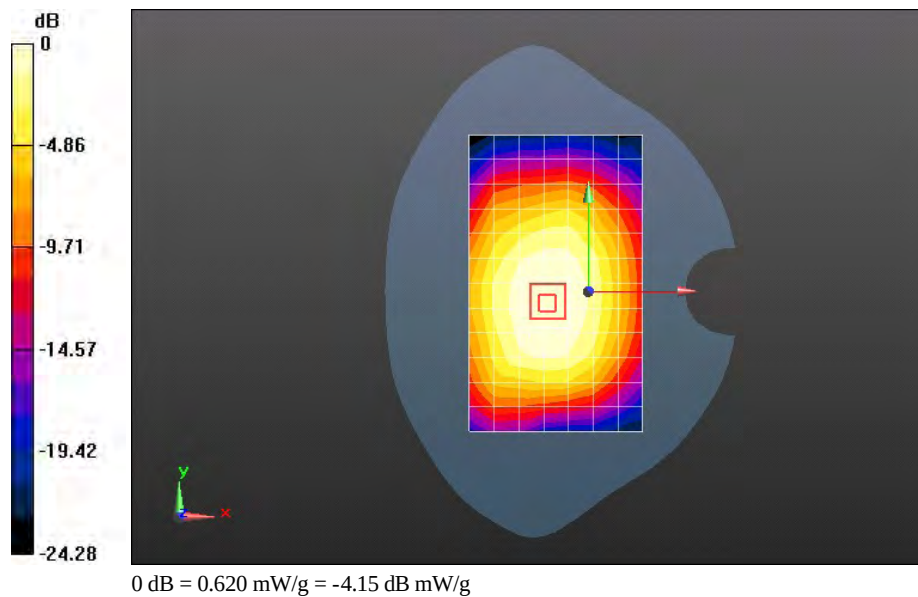

Test Laboratory: HUAWEI SAR Lab

U9202L-1 GSM850 EGPRS 2ST 190CH Towards Ground 10mm

DUT: U9202L-1; Type: Ascend P1; HSPA+/HSUPA/HSDPA/UMTS/GSM/GPRS/EDGE Mobile Phone with Bluetooth; Serial: SAR1

Communication System: HW-GSM/GPRS/EDGE 2TS; Frequency: 836.6 MHz

Medium parameters used: $f = 837$ MHz; $\sigma = 0.98$ mho/m; $\epsilon_r = 52.904$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3661; ConvF(9.64, 9.64, 9.64); Calibrated: 1/27/2012;
- Sensor-Surface: 4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE4 Sn679; Calibrated: 12/23/2011
- Phantom: SAM1; Type: SAM; Serial: TP-1475
- DASY52 52.8.1(838); SEMCAD X 14.6.6(6824)

Configuration/Body/Area Scan (8x13x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 0.952 W/kg



Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 31.184 V/m; Power Drift = -0.19 dB

Peak SAR (extrapolated) = 1.119 mW/g

SAR(1 g) = 0.904 mW/g; SAR(10 g) = 0.688 mW/g

Maximum value of SAR (measured) = 0.948 W/kg

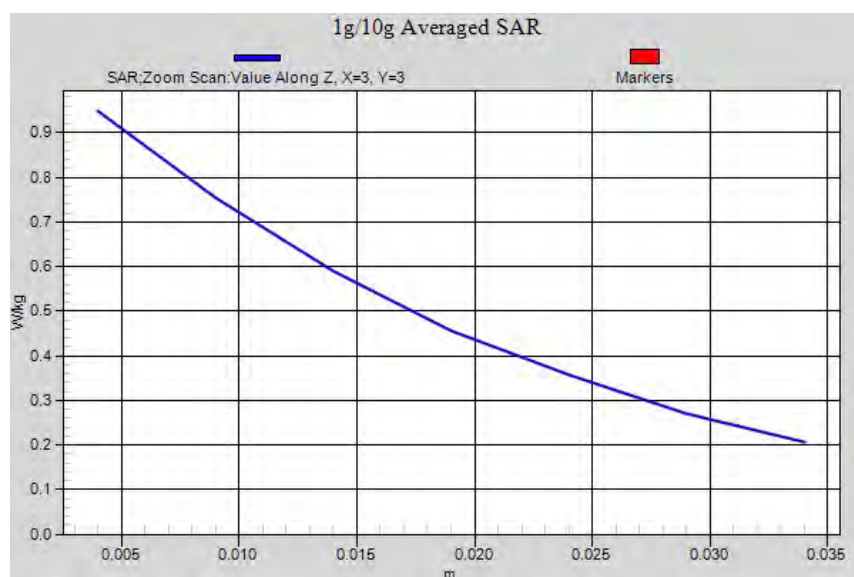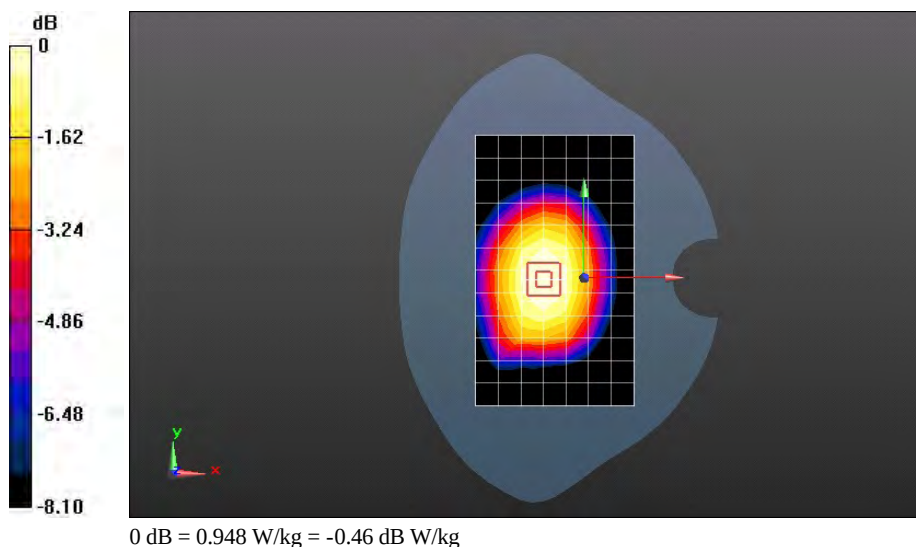

Test Laboratory: HUAWEI SAR Lab

U9202L-1 GSM850 EGPRS 2ST 251CH Towards Ground 10mm

DUT: U9202L-1; Type: Ascend P1; HSPA+/HSUPA/HSDPA/UMTS/GSM/GPRS/EDGE Mobile Phone with Bluetooth; Serial: SAR1

Communication System: HW-GSM/GPRS/EDGE 2TS; Frequency: 848.8 MHz

Medium parameters used: $f = 849$ MHz; $\sigma = 1$ mho/m; $\epsilon_r = 52.583$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3661; ConvF(9.64, 9.64, 9.64); Calibrated: 1/27/2012;
- Sensor-Surface: 4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE4 Sn679; Calibrated: 12/23/2011
- Phantom: SAM1; Type: SAM; Serial: TP-1475
- DASY52 52.8.1(838); SEMCAD X 14.6.5(6469)

Configuration/Body/Area Scan (8x13x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 0.861 mW/g


Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 28.899 V/m; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 1.125 mW/g

SAR(1 g) = 0.902 mW/g; SAR(10 g) = 0.673 mW/g

Maximum value of SAR (measured) = 0.943 mW/g

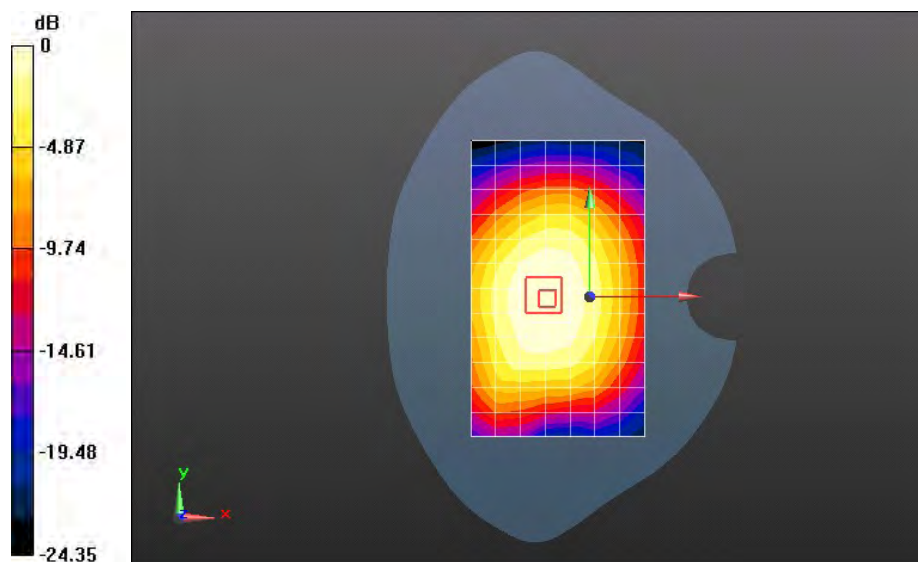

0 dB = 0.861 mW/g = -1.30 dB mW/g

Test Laboratory: HUAWEI SAR Lab

U9202L-1 GSM850 190CH Towards Ground 10mm with Headset

DUT: U9202L-1; Type: Ascend P1; HSPA+/HSUPA/HSDPA/UMTS/GSM/GPRS/EDGE Mobile Phone with Bluetooth; Serial: SAR1

Communication System: HW-GSM/GPRS/EDGE 1TS; Frequency: 836.6 MHz

Medium parameters used: $f = 837$ MHz; $\sigma = 0.98$ mho/m; $\epsilon_r = 52.904$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3661; ConvF(9.64, 9.64, 9.64); Calibrated: 1/27/2012;
- Sensor-Surface: 4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE4 Sn679; Calibrated: 12/23/2011
- Phantom: SAM1; Type: SAM; Serial: TP-1475
- DASY52 52.8.1(838); SEMCAD X 14.6.5(6469)

Configuration/Body/Area Scan (8x13x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 0.644 mW/g


Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 25.036 V/m; Power Drift = -0.06 dB

Peak SAR (extrapolated) = 0.749 mW/g

SAR(1 g) = 0.611 mW/g; SAR(10 g) = 0.470 mW/g

Maximum value of SAR (measured) = 0.640 mW/g

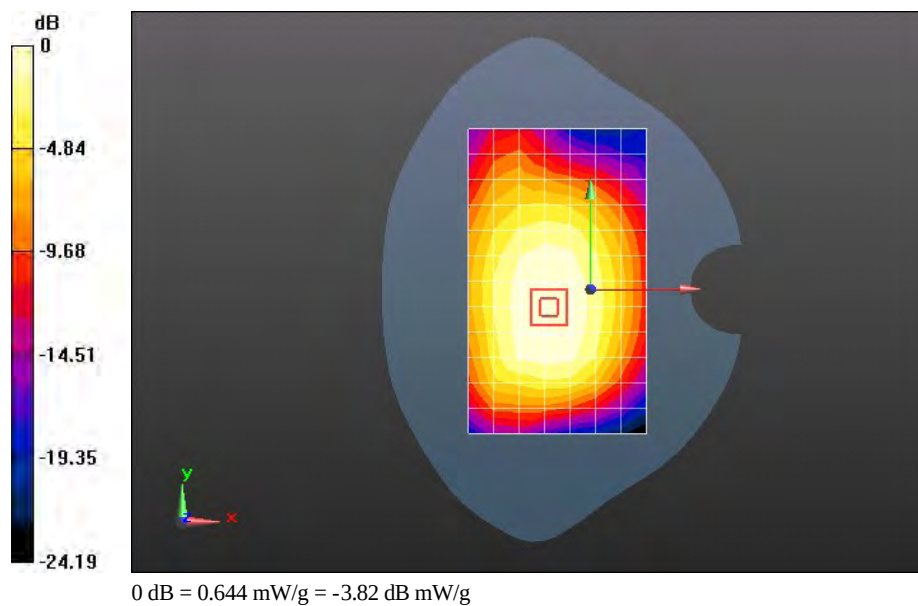

Test Laboratory: HUAWEI SAR Lab

U9202L-1 GSM1900 661CH Left hand touch cheek

DUT: U9202L-1; Type: Ascend P1; HSPA+/HSUPA/HSDPA/UMTS/GSM/GPRS/EDGE Mobile Phone with Bluetooth; Serial: SAR1

Communication System: HW-GSM/GPRS/EDGE 1TS; Frequency: 1880 MHz

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.409$ mho/m; $\epsilon_r = 39.821$; $\rho = 1000$ kg/m³

Phantom section: Left Section

DASY Configuration:

- Probe: EX3DV4 - SN3661; ConvF(8.33, 8.33, 8.33); Calibrated: 1/27/2012;
- Sensor-Surface: 4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE4 Sn679; Calibrated: 12/23/2011
- Phantom: SAM1; Type: SAM; Serial: TP-1475
- DASY52 52.8.1(838); SEMCAD X 14.6.5(6469)

Configuration/Head/Area Scan (8x12x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 0.139 mW/g


Configuration/Head/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 5.623 V/m; Power Drift = -0.15 dB

Peak SAR (extrapolated) = 0.204 mW/g

SAR(1 g) = 0.137 mW/g; SAR(10 g) = 0.091 mW/g

Maximum value of SAR (measured) = 0.150 mW/g

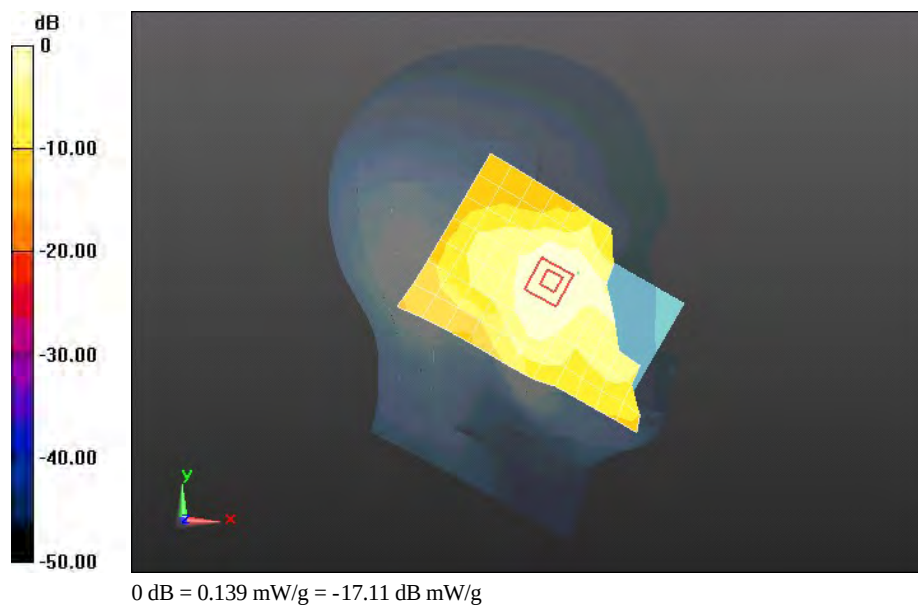

Test Laboratory: HUAWEI SAR Lab

U9202L-1 GSM1900 661CH Left hand tilt 15 degree

DUT: U9202L-1; Type: Ascend P1; HSPA+/HSUPA/HSDPA/UMTS/GSM/GPRS/EDGE Mobile Phone with Bluetooth; Serial: SAR1

Communication System: HW-GSM/GPRS/EDGE 1TS; Frequency: 1880 MHz

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.409$ mho/m; $\epsilon_r = 39.821$; $\rho = 1000$ kg/m³

Phantom section: Left Section

DASY Configuration:

- Probe: EX3DV4 - SN3661; ConvF(8.33, 8.33, 8.33); Calibrated: 1/27/2012;
- Sensor-Surface: 4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE4 Sn679; Calibrated: 12/23/2011
- Phantom: SAM1; Type: SAM; Serial: TP-1475
- DASY52 52.8.1(838); SEMCAD X 14.6.5(6469)

Configuration/Head/Area Scan (8x12x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 0.0677 mW/g


Configuration/Head/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 6.728 V/m; Power Drift = 0.05 dB

Peak SAR (extrapolated) = 0.097 mW/g

SAR(1 g) = 0.065 mW/g; SAR(10 g) = 0.042 mW/g

Maximum value of SAR (measured) = 0.0697 mW/g

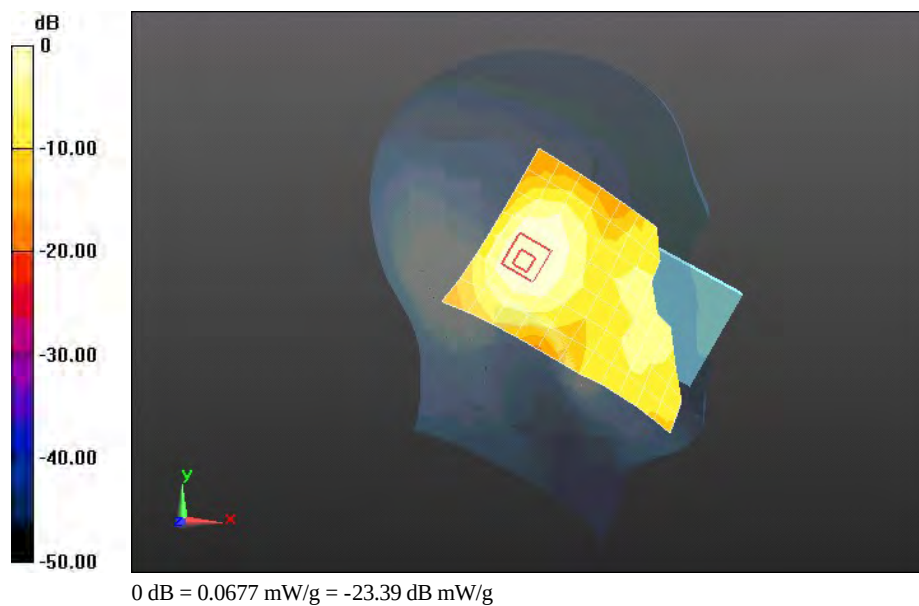

Test Laboratory: HUAWEI SAR Lab

U9202L-1 GSM1900 661CH Right hand touch cheek**DUT: U9202L-1; Type: Ascend P1; HSPA+/HSUPA/HSDPA/UMTS/GSM/GPRS/EDGE Mobile Phone with Bluetooth; Serial: SAR1**

Communication System: HW-GSM/GPRS/EDGE 1TS; Frequency: 1880 MHz

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.409$ mho/m; $\epsilon_r = 39.821$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY Configuration:

- Probe: EX3DV4 - SN3661; ConvF(8.33, 8.33, 8.33); Calibrated: 1/27/2012;
- Sensor-Surface: 4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE4 Sn679; Calibrated: 12/23/2011
- Phantom: SAM1; Type: SAM; Serial: TP-1475
- DASY52 52.8.1(838); SEMCAD X 14.6.6(6824)

Configuration/Head/Area Scan (8x12x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 0.252 W/kg



Configuration/Head/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 3.290 V/m; Power Drift = 0.04 dB

Peak SAR (extrapolated) = 0.411 mW/g

SAR(1 g) = 0.258 mW/g; SAR(10 g) = 0.149 mW/g

Maximum value of SAR (measured) = 0.282 W/kg

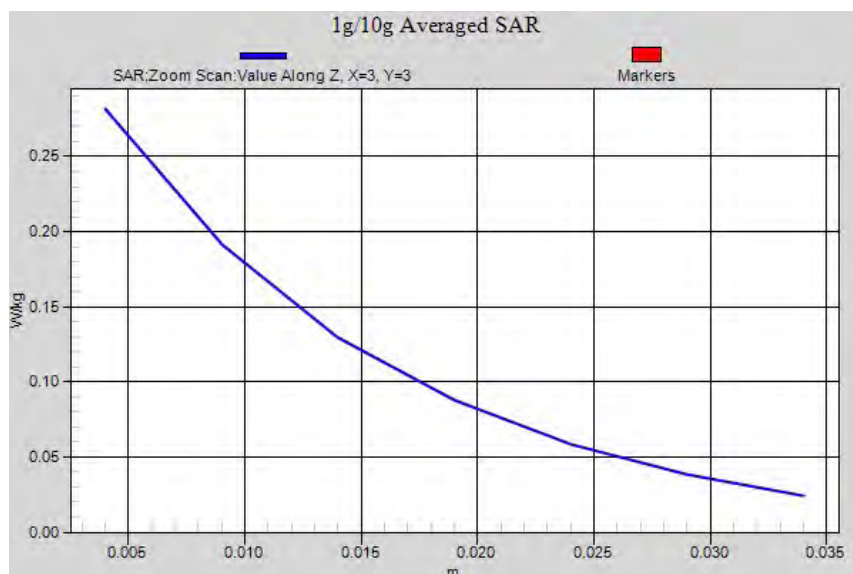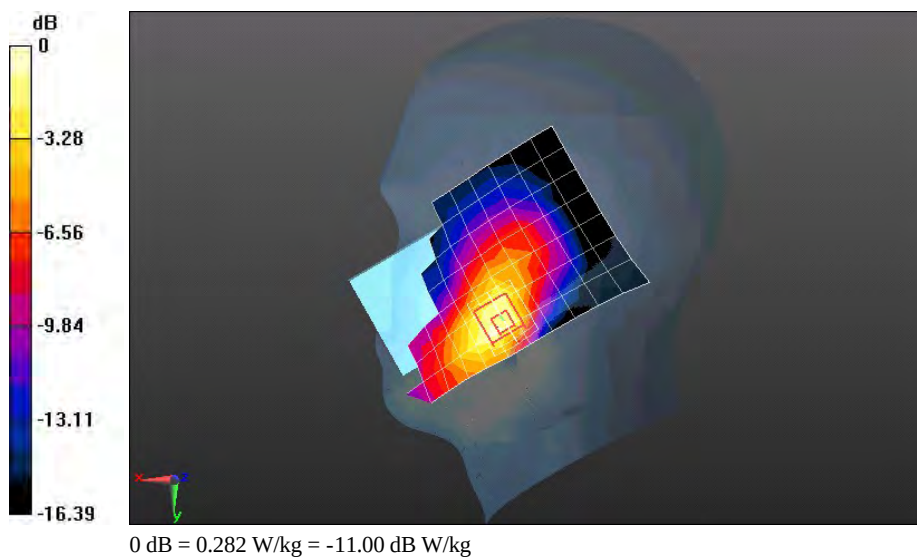

Test Laboratory: HUAWEI SAR Lab

U9202L-1 GSM1900 661CH Right hand tilt 15 degree

DUT: U9202L-1; Type: Ascend P1; HSPA+/HSUPA/HSDPA/UMTS/GSM/GPRS/EDGE Mobile Phone with Bluetooth; Serial: SAR1

Communication System: HW-GSM/GPRS/EDGE 1TS; Frequency: 1880 MHz

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.409$ mho/m; $\epsilon_r = 39.821$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY Configuration:

- Probe: EX3DV4 - SN3661; ConvF(8.33, 8.33, 8.33); Calibrated: 1/27/2012;
- Sensor-Surface: 4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE4 Sn679; Calibrated: 12/23/2011
- Phantom: SAM1; Type: SAM; Serial: TP-1475
- DASY52 52.8.1(838); SEMCAD X 14.6.5(6469)

Configuration/Head/Area Scan (8x12x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 0.0672 mW/g


Configuration/Head/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 6.977 V/m; Power Drift = 0.07 dB

Peak SAR (extrapolated) = 0.104 mW/g

SAR(1 g) = 0.068 mW/g; SAR(10 g) = 0.042 mW/g

Maximum value of SAR (measured) = 0.0750 mW/g

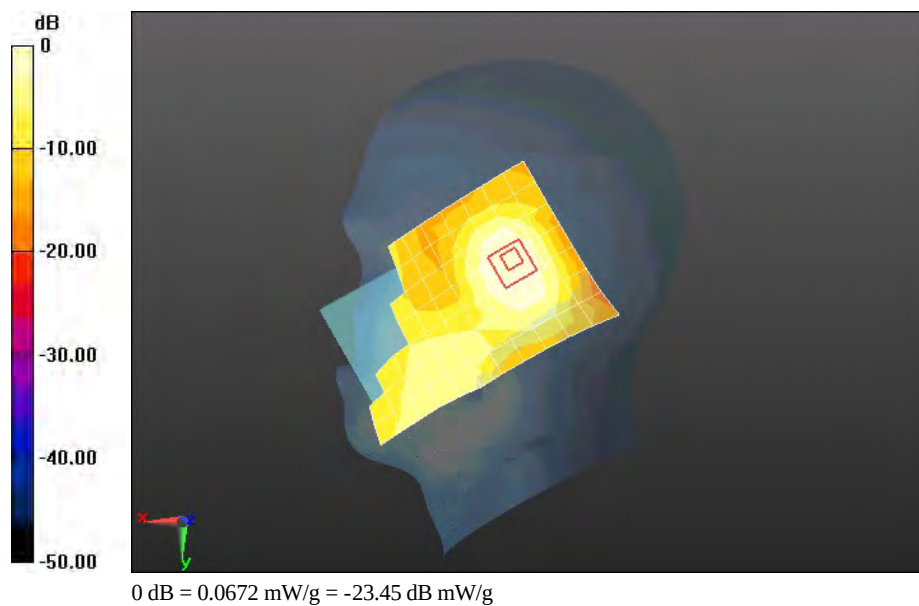

Test Laboratory: HUAWEI SAR Lab

U9202L-1 GSM1900 GPRS 1TS 661CH Towards Phantom10mm

DUT: U9202L-1; Type: Ascend P1; HSPA+/HSUPA/HSDPA/UMTS/GSM/GPRS/EDGE Mobile Phone with Bluetooth; Serial: SAR1

Communication System: HW-GSM/GPRS/EDGE 1TS; Frequency: 1880 MHz

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.555$ mho/m; $\epsilon_r = 51.577$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3661; ConvF(7.89, 7.89, 7.89); Calibrated: 1/27/2012;
- Sensor-Surface: 4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE4 Sn679; Calibrated: 12/23/2011
- Phantom: SAM1; Type: SAM; Serial: TP-1475
- DASY52 52.8.1(838); SEMCAD X 14.6.5(6469)

Configuration/Body/Area Scan (8x13x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 0.229 mW/g


Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 5.362 V/m; Power Drift = -0.13 dB

Peak SAR (extrapolated) = 0.374 mW/g

SAR(1 g) = 0.214 mW/g; SAR(10 g) = 0.118 mW/g

Maximum value of SAR (measured) = 0.237 mW/g

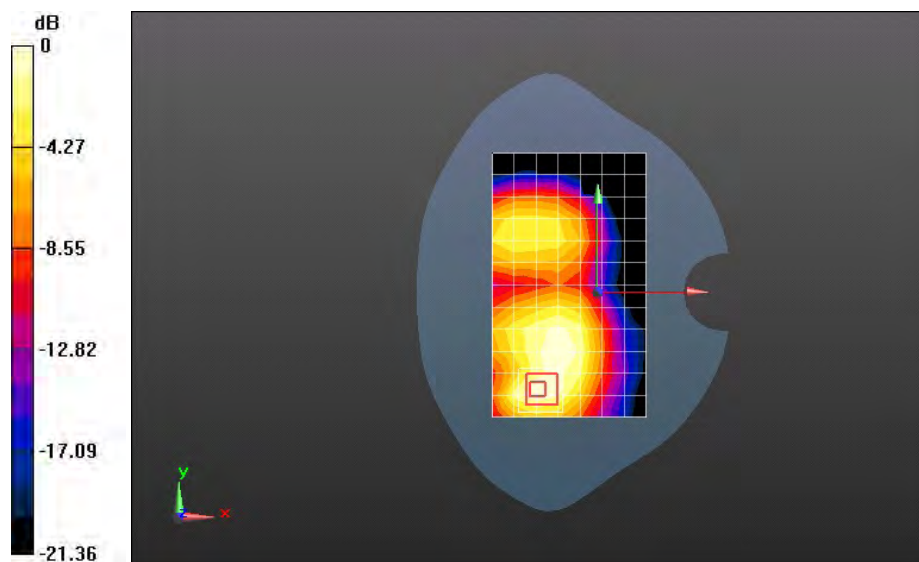

0 dB = 0.237 mW/g = -12.51 dB mW/g

Test Laboratory: HUAWEI SAR Lab

U9202L-1 GSM1900 GPRS 2TS 661CH Towards Phantom10mm

DUT: U9202L-1; Type: Ascend P1; HSPA+/HSUPA/HSDPA/UMTS/GSM/GPRS/EDGE Mobile Phone with Bluetooth; Serial: SAR1

Communication System: HW-GSM/GPRS/EDGE 2TS; Frequency: 1880 MHz

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.555$ mho/m; $\epsilon_r = 51.577$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3661; ConvF(7.89, 7.89, 7.89); Calibrated: 1/27/2012;
- Sensor-Surface: 4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE4 Sn679; Calibrated: 12/23/2011
- Phantom: SAM1; Type: SAM; Serial: TP-1475
- DASY52 52.8.1(838); SEMCAD X 14.6.5(6469)

Configuration/Body/Area Scan (8x13x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 0.264 mW/g


Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 5.661 V/m; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 0.476 mW/g

SAR(1 g) = 0.263 mW/g; SAR(10 g) = 0.144 mW/g

Maximum value of SAR (measured) = 0.293 mW/g

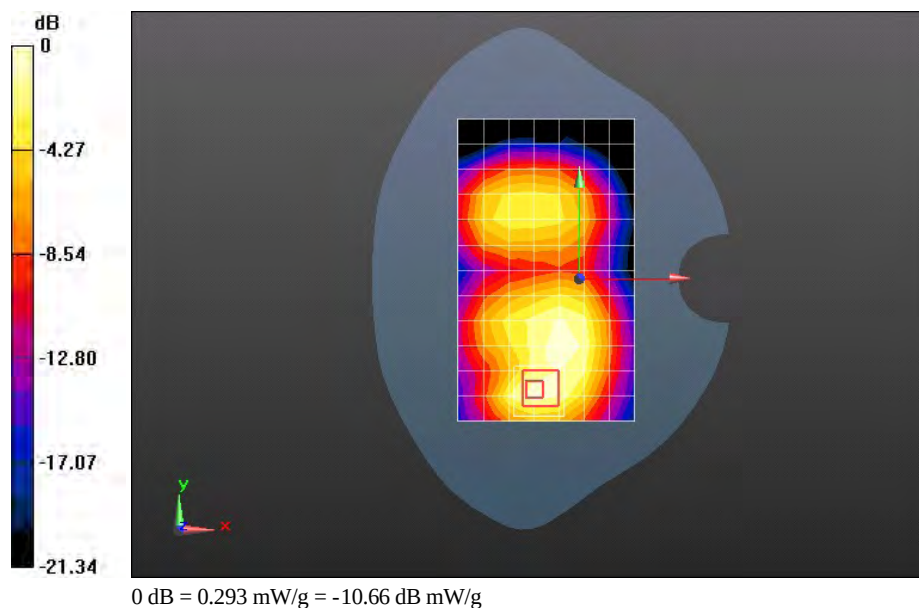

Test Laboratory: HUAWEI SAR Lab

U9202L-1 GSM1900 GPRS 2TS 661CH Towards Ground 10mm**DUT: U9202L-1; Type: Ascend P1; HSPA+/HSUPA/HSDPA/UMTS/GSM/GPRS/EDGE Mobile Phone with Bluetooth; Serial: SAR1**

Communication System: HW-GSM/GPRS/EDGE 2TS; Frequency: 1880 MHz

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.555$ mho/m; $\epsilon_r = 51.577$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3661; ConvF(7.89, 7.89, 7.89); Calibrated: 1/27/2012;
- Sensor-Surface: 4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE4 Sn679; Calibrated: 12/23/2011
- Phantom: SAM1; Type: SAM; Serial: TP-1475
- DASY52 52.8.1(838); SEMCAD X 14.6.6(6824)

Configuration/Body/Area Scan (8x13x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 0.776 W/kg



Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 5.026 V/m; Power Drift = 0.12 dB

Peak SAR (extrapolated) = 1.239 mW/g

SAR(1 g) = 0.700 mW/g; SAR(10 g) = 0.361 mW/g

Maximum value of SAR (measured) = 0.778 W/kg

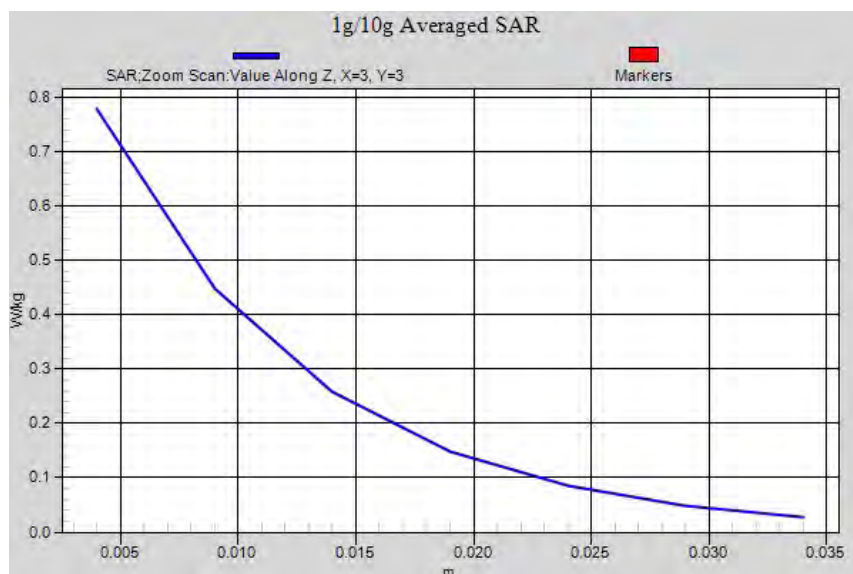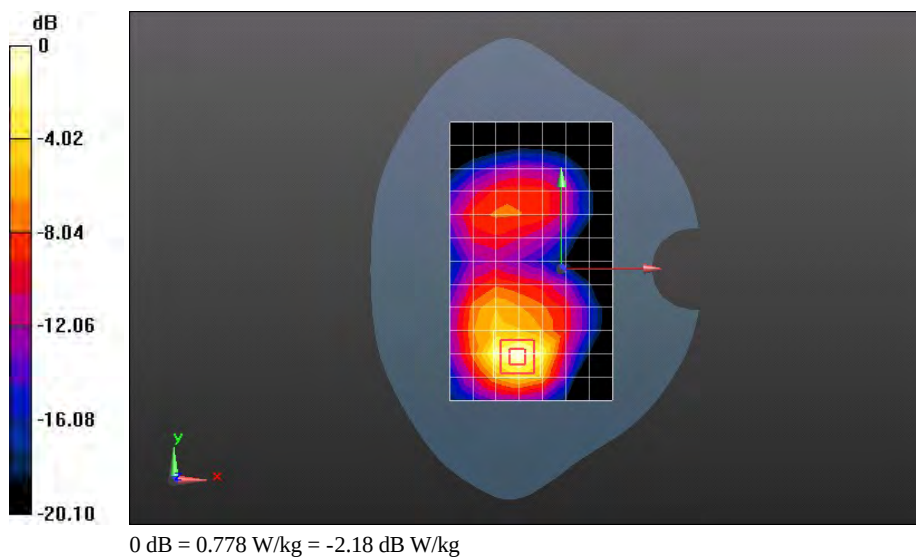

Test Laboratory: HUAWEI SAR Lab

U9202L-1 GSM1900 GPRS 2TS 661CH Left edge 10mm

DUT: U9202L-1; Type: Ascend P1; HSPA+/HSUPA/HSDPA/UMTS/GSM/GPRS/EDGE Mobile Phone with Bluetooth; Serial: SAR1

Communication System: HW-GSM/GPRS/EDGE 2TS; Frequency: 1880 MHz

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.555$ mho/m; $\epsilon_r = 51.577$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3661; ConvF(7.89, 7.89, 7.89); Calibrated: 1/27/2012;
- Sensor-Surface: 4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE4 Sn679; Calibrated: 12/23/2011
- Phantom: SAM1; Type: SAM; Serial: TP-1475
- DASY52 52.8.1(838); SEMCAD X 14.6.5(6469)

Configuration/Body/Area Scan (8x13x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 0.0549 mW/g

Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 2.808 V/m; Power Drift = 0.13 dB

Peak SAR (extrapolated) = 0.093 mW/g

SAR(1 g) = 0.052 mW/g; SAR(10 g) = 0.029 mW/g

Maximum value of SAR (measured) = 0.0576 mW/g


Configuration/Body/Zoom Scan (7x7x7)/Cube 1: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 2.808 V/m; Power Drift = 0.13 dB

Peak SAR (extrapolated) = 0.083 mW/g

SAR(1 g) = 0.048 mW/g; SAR(10 g) = 0.027 mW/g

Maximum value of SAR (measured) = 0.0518 mW/g

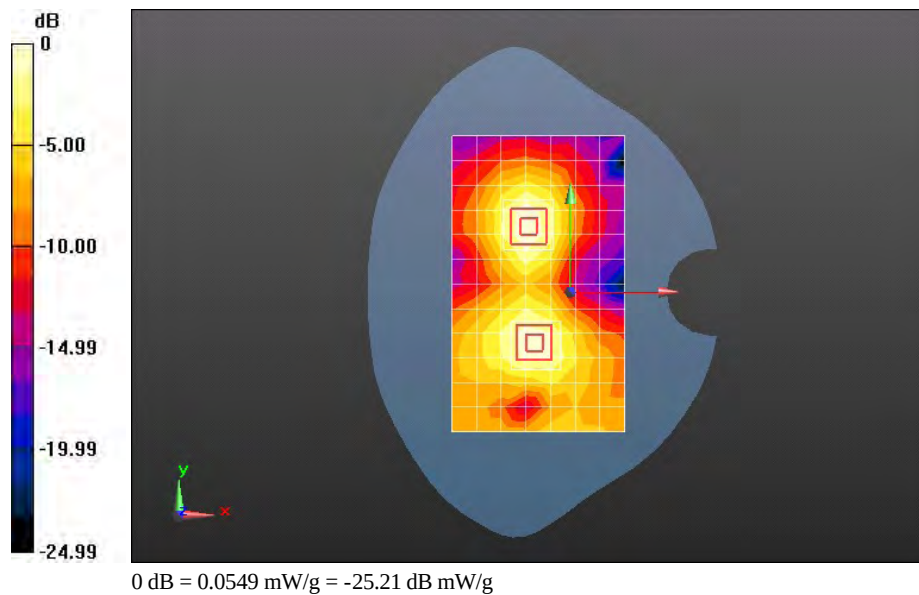

Test Laboratory: HUAWEI SAR Lab

U9202L-1 GSM1900 GPRS 2TS 661CH Right edge 10mm

DUT: U9202L-1; Type: Ascend P1; HSPA+/HSUPA/HSDPA/UMTS/GSM/GPRS/EDGE Mobile Phone with Bluetooth; Serial: SAR1

Communication System: HW-GSM/GPRS/EDGE 2TS; Frequency: 1880 MHz

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.555$ mho/m; $\epsilon_r = 51.577$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3661; ConvF(7.89, 7.89, 7.89); Calibrated: 1/27/2012;
- Sensor-Surface: 4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE4 Sn679; Calibrated: 12/23/2011
- Phantom: SAM1; Type: SAM; Serial: TP-1475
- DASY52 52.8.1(838); SEMCAD X 14.6.5(6469)

Configuration/Body/Area Scan (8x13x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 0.141 mW/g

Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 3.759 V/m; Power Drift = 0.18 dB

Peak SAR (extrapolated) = 0.228 mW/g

SAR(1 g) = 0.131 mW/g; SAR(10 g) = 0.072 mW/g

Maximum value of SAR (measured) = 0.144 mW/g


Configuration/Body/Zoom Scan (7x7x7)/Cube 1: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 3.759 V/m; Power Drift = 0.18 dB

Peak SAR (extrapolated) = 0.158 mW/g

SAR(1 g) = 0.091 mW/g; SAR(10 g) = 0.049 mW/g

Maximum value of SAR (measured) = 0.0986 mW/g

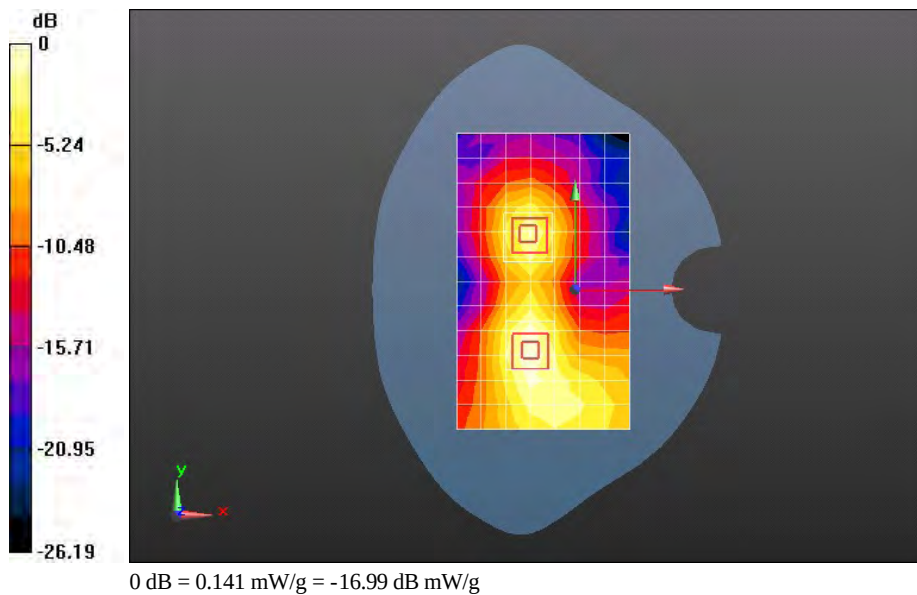

Test Laboratory: HUAWEI SAR Lab

U9202L-1 GSM1900 GPRS 2TS 661CH Bottom edge 10mm

DUT: U9202L-1; Type: Ascend P1; HSPA+/HSUPA/HSDPA/UMTS/GSM/GPRS/EDGE Mobile Phone with Bluetooth; Serial: SAR1

Communication System: HW-GSM/GPRS/EDGE 2TS; Frequency: 1880 MHz

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.555$ mho/m; $\epsilon_r = 51.577$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3661; ConvF(7.89, 7.89, 7.89); Calibrated: 1/27/2012;
- Sensor-Surface: 4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE4 Sn679; Calibrated: 12/23/2011
- Phantom: SAM1; Type: SAM; Serial: TP-1475
- DASY52 52.8.1(838); SEMCAD X 14.6.5(6469)

Configuration/Body/Area Scan (8x13x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 0.481 mW/g


Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 11.991 V/m; Power Drift = -0.07 dB

Peak SAR (extrapolated) = 0.942 mW/g

SAR(1 g) = 0.535 mW/g; SAR(10 g) = 0.284 mW/g

Maximum value of SAR (measured) = 0.598 mW/g

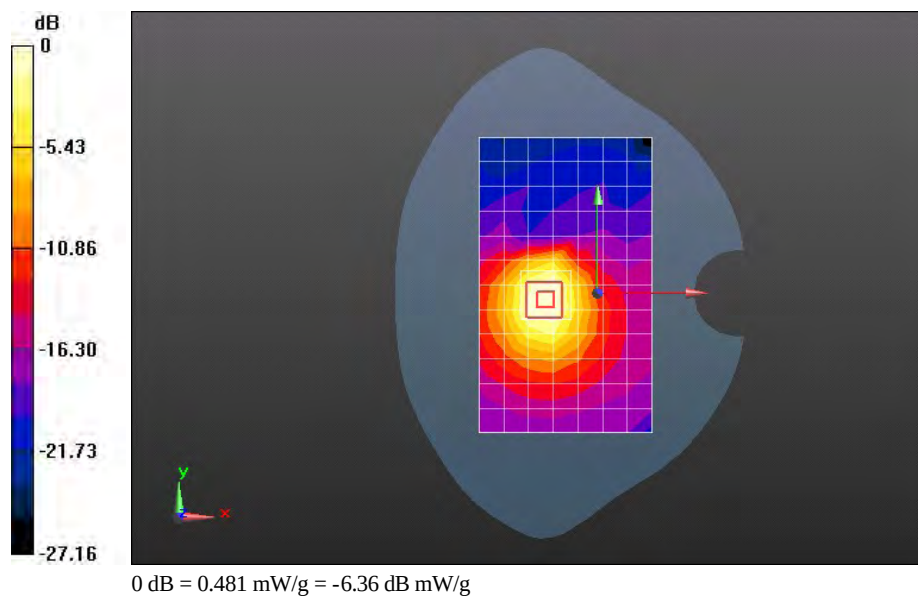

Test Laboratory: HUAWEI SAR Lab

U9202L-1 GSM1900 EGPRS 1TS 661CH Towards Ground 10mm

DUT: U9202L-1; Type: Ascend P1; HSPA+/HSUPA/HSDPA/UMTS/GSM/GPRS/EDGE Mobile Phone with Bluetooth; Serial: SAR1

Communication System: HW-GSM/GPRS/EDGE 1TS; Frequency: 1880 MHz

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.555$ mho/m; $\epsilon_r = 51.577$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3661; ConvF(7.89, 7.89, 7.89); Calibrated: 1/27/2012;
- Sensor-Surface: 4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE4 Sn679; Calibrated: 12/23/2011
- Phantom: SAM1; Type: SAM; Serial: TP-1475
- DASY52 52.8.1(838); SEMCAD X 14.6.5(6469)

Configuration/Body/Area Scan (8x13x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 0.590 mW/g


Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 4.838 V/m; Power Drift = -0.17 dB

Peak SAR (extrapolated) = 1.147 mW/g

SAR(1 g) = 0.554 mW/g; SAR(10 g) = 0.284 mW/g

Maximum value of SAR (measured) = 0.618 mW/g

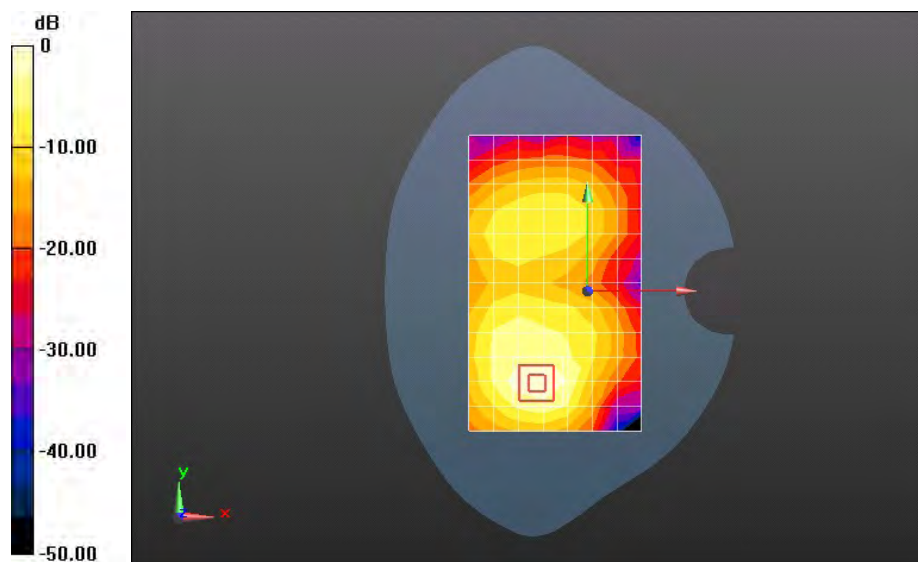

Test Laboratory: HUAWEI SAR Lab

U9202L-1 GSM1900 EGPRS 2TS 661CH Towards Ground 10mm

DUT: U9202L-1; Type: Ascend P1; HSPA+/HSUPA/HSDPA/UMTS/GSM/GPRS/EDGE Mobile Phone with Bluetooth; Serial: SAR1

Communication System: HW-GSM/GPRS/EDGE 2TS; Frequency: 1880 MHz

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.555$ mho/m; $\epsilon_r = 51.577$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3661; ConvF(7.89, 7.89, 7.89); Calibrated: 1/27/2012;
- Sensor-Surface: 4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE4 Sn679; Calibrated: 12/23/2011
- Phantom: SAM1; Type: SAM; Serial: TP-1475
- DASY52 52.8.1(838); SEMCAD X 14.6.5(6469)

Configuration/Body/Area Scan (8x13x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 0.670 mW/g


Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 5.045 V/m; Power Drift = 0.17 dB

Peak SAR (extrapolated) = 1.116 mW/g

SAR(1 g) = 0.632 mW/g; SAR(10 g) = 0.327 mW/g

Maximum value of SAR (measured) = 0.713 mW/g

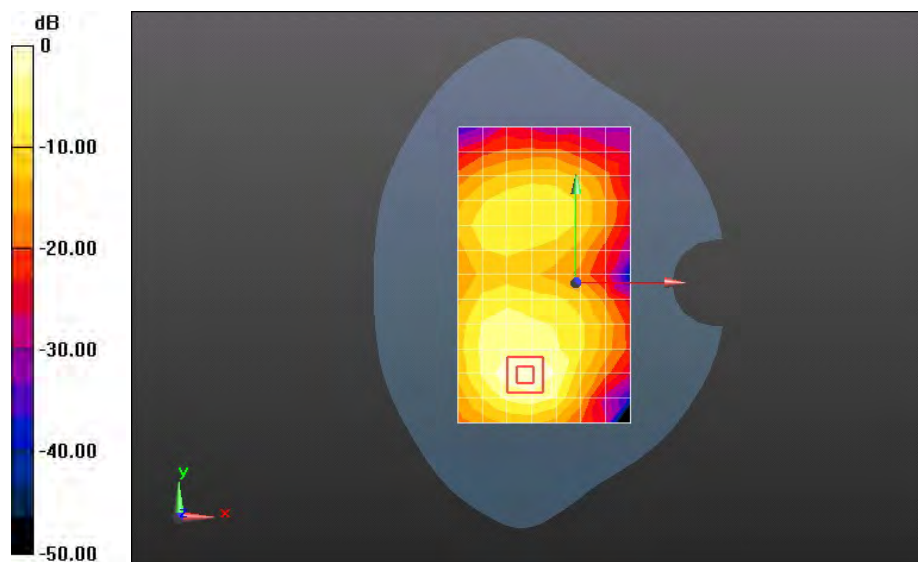

0 dB = 0.670 mW/g = -3.48 dB mW/g

Test Laboratory: HUAWEI SAR Lab

U9202L-1 GSM1900 661CH Towards Ground 10mm with Headset

DUT: U9202L-1; Type: Ascend P1; HSPA+/HSUPA/HSDPA/UMTS/GSM/GPRS/EDGE Mobile Phone with Bluetooth; Serial: SAR1

Communication System: HW-GSM/GPRS/EDGE 1TS; Frequency: 1880 MHz

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.555$ mho/m; $\epsilon_r = 51.577$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3661; ConvF(7.89, 7.89, 7.89); Calibrated: 1/27/2012;
- Sensor-Surface: 4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE4 Sn679; Calibrated: 12/23/2011
- Phantom: SAM1; Type: SAM; Serial: TP-1475
- DASY52 52.8.1(838); SEMCAD X 14.6.5(6469)

Configuration/Body/Area Scan (8x13x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 0.630 mW/g


Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 4.766 V/m; Power Drift = 0.00 dB

Peak SAR (extrapolated) = 1.085 mW/g

SAR(1 g) = 0.626 mW/g; SAR(10 g) = 0.328 mW/g

Maximum value of SAR (measured) = 0.707 mW/g

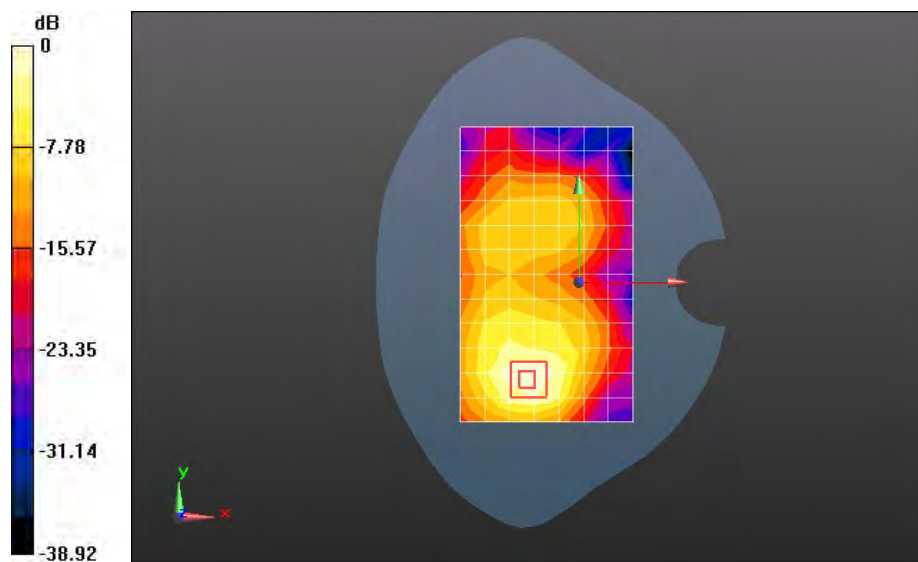

0 dB = 0.630 mW/g = -4.01 dB mW/g

Test Laboratory: HUAWEI SAR Lab

U9202L-1 WCDMA850 4182CH Left hand touch cheek**DUT: U9202L-1; Type: Ascend P1; HSPA+/HSUPA/HSDPA/UMTS/GSM/GPRS/EDGE Mobile Phone with Bluetooth; Serial: SAR1**

Communication System: HW-UMTS-FDD; Frequency: 836.4 MHz

Medium parameters used (interpolated): $f = 836.4$ MHz; $\sigma = 0.921$ mho/m; $\epsilon_r = 41.183$; $\rho = 1000$ kg/m³

Phantom section: Left Section

DASY Configuration:

- Probe: EX3DV4 - SN3661; ConvF(9.46, 9.46, 9.46); Calibrated: 1/27/2012;
- Sensor-Surface: 4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE4 Sn679; Calibrated: 12/23/2011
- Phantom: SAM 2; Type: SAM; Serial: TP-1474
- DASY52 52.8.1(838); SEMCAD X 14.6.6(6824)

Configuration/Head/Area Scan (8x12x1): Measurement grid: dx=15mm, dy=15mm[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.433 W/kg



Configuration/Head/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 5.753 V/m; Power Drift = -0.15 dB

Peak SAR (extrapolated) = 0.534 mW/g

SAR(1 g) = 0.416 mW/g; SAR(10 g) = 0.311 mW/g[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.439 W/kg

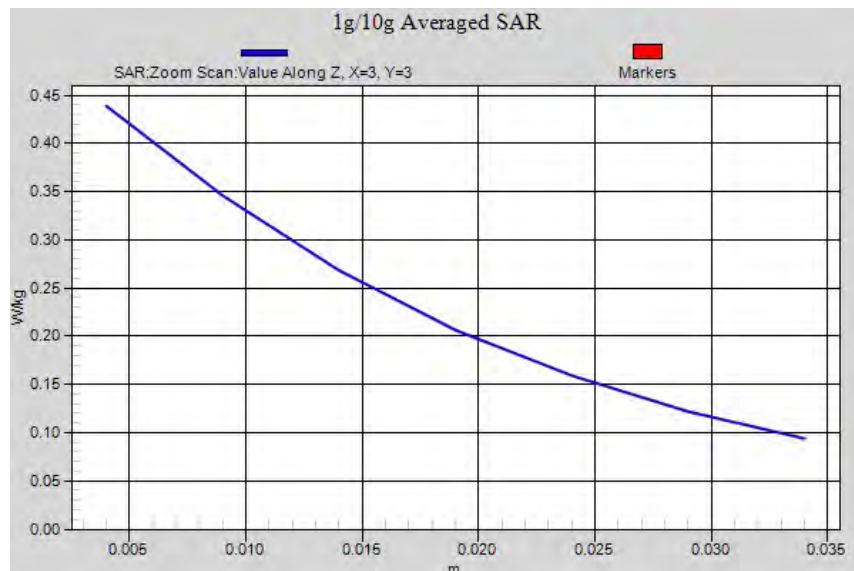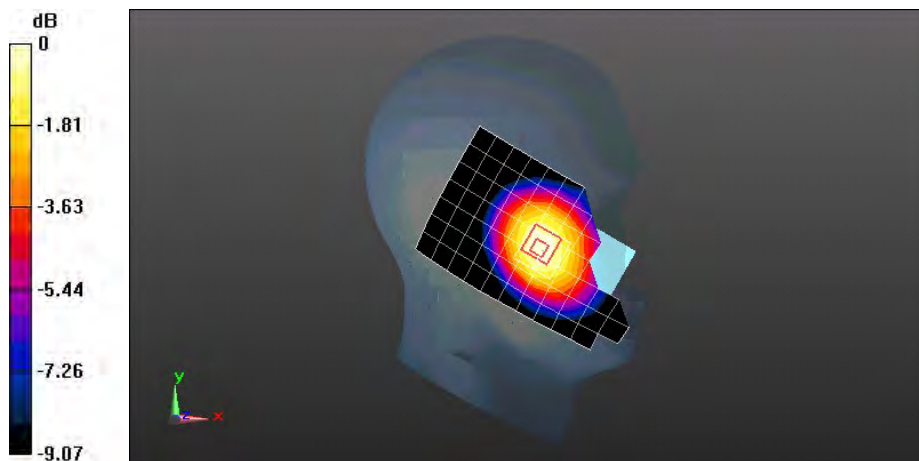

Test Laboratory: HUAWEI SAR Lab

U9202L-1 WCDMA850 4182CH Left hand tilt 15 degree

DUT: U9202L-1; Type: Ascend P1; HSPA+/HSUPA/HSDPA/UMTS/GSM/GPRS/EDGE Mobile Phone with Bluetooth; Serial: SAR1

Communication System: HW-UMTS-FDD; Frequency: 836.4 MHz

Medium parameters used (interpolated): $f = 836.4$ MHz; $\sigma = 0.921$ mho/m; $\epsilon_r = 41.183$; $\rho = 1000$ kg/m³

Phantom section: Left Section

DASY Configuration:

- Probe: EX3DV4 - SN3661; ConvF(9.46, 9.46, 9.46); Calibrated: 1/27/2012;
- Sensor-Surface: 4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE4 Sn679; Calibrated: 12/23/2011
- Phantom: SAM 2; Type: SAM; Serial: TP-1474
- DASY52 52.8.1(838); SEMCAD X 14.6.5(6469)

Configuration/Head/Area Scan (8x12x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.218 mW/g

Configuration/Head/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm


Reference Value = 9.507 V/m; Power Drift = -0.09 dB

Peak SAR (extrapolated) = 0.268 mW/g

SAR(1 g) = 0.217 mW/g; SAR(10 g) = 0.166 mW/g

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.228 mW/g

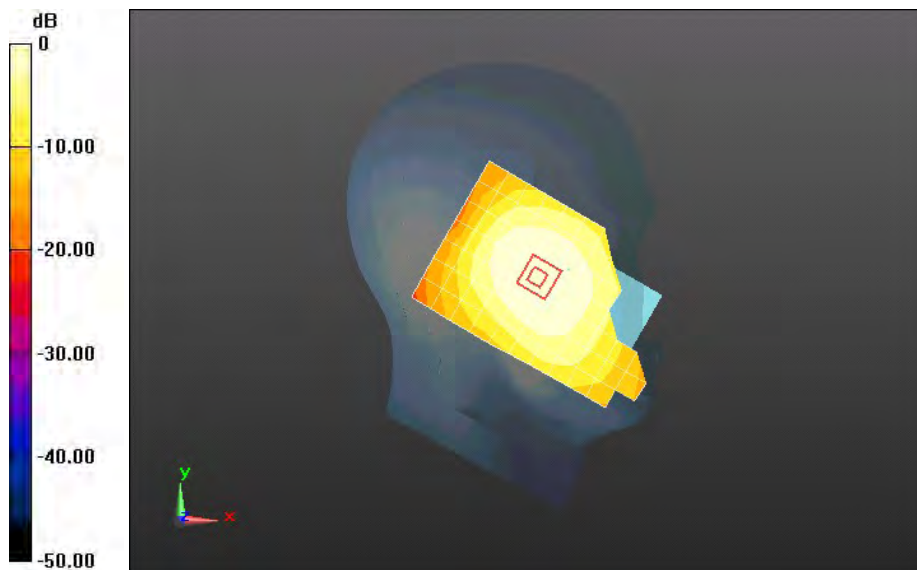

0 dB = 0.218 mW/g = -13.22 dB mW/g

Test Laboratory: HUAWEI SAR Lab

U9202L-1 WCDMA850 4182CH Right hand touch cheek

DUT: U9202L-1; Type: Ascend P1; HSPA+/HSUPA/HSDPA/UMTS/GSM/GPRS/EDGE Mobile Phone with Bluetooth; Serial: SAR1

Communication System: HW-UMTS-FDD; Frequency: 836.4 MHz

Medium parameters used (interpolated): $f = 836.4$ MHz; $\sigma = 0.921$ mho/m; $\epsilon_r = 41.183$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY Configuration:

- Probe: EX3DV4 - SN3661; ConvF(9.46, 9.46, 9.46); Calibrated: 1/27/2012;
- Sensor-Surface: 4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE4 Sn679; Calibrated: 12/23/2011
- Phantom: SAM 2; Type: SAM; Serial: TP-1474
- DASY52 52.8.1(838); SEMCAD X 14.6.5(6469)

Configuration/Head/Area Scan (8x12x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.396 mW/g

Configuration/Head/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm


Reference Value = 6.017 V/m; Power Drift = 0.04 dB

Peak SAR (extrapolated) = 0.479 mW/g

SAR(1 g) = 0.388 mW/g; SAR(10 g) = 0.292 mW/g

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.410 mW/g

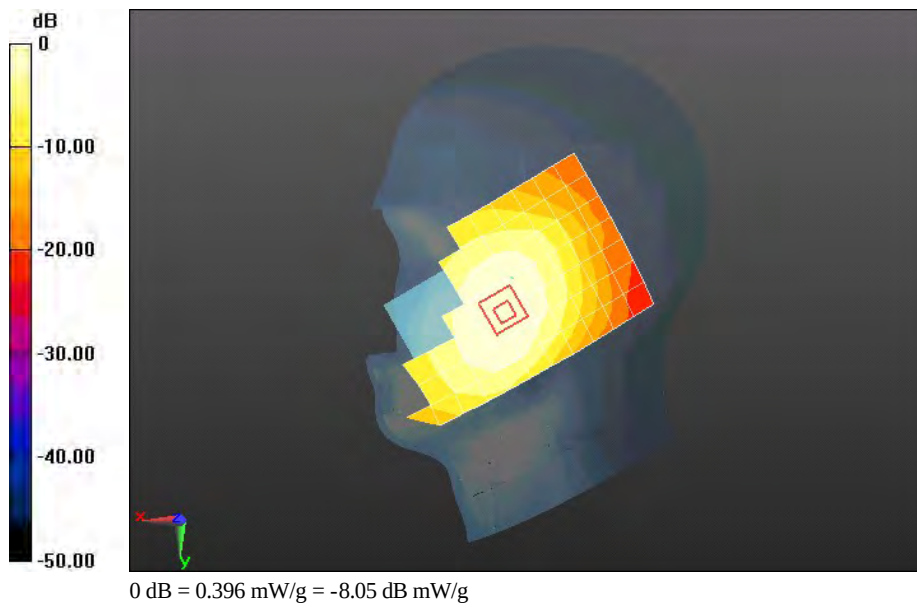

Test Laboratory: HUAWEI SAR Lab

U9202L-1 WCDMA850 4182CH Right hand tilt 15 degree

DUT: U9202L-1; Type: Ascend P1; HSPA+/HSUPA/HSDPA/UMTS/GSM/GPRS/EDGE Mobile Phone with Bluetooth; Serial: SAR1

Communication System: HW-UMTS-FDD; Frequency: 836.4 MHz

Medium parameters used (interpolated): $f = 836.4$ MHz; $\sigma = 0.921$ mho/m; $\epsilon_r = 41.183$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY Configuration:

- Probe: EX3DV4 - SN3661; ConvF(9.46, 9.46, 9.46); Calibrated: 1/27/2012;
- Sensor-Surface: 4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE4 Sn679; Calibrated: 12/23/2011
- Phantom: SAM 2; Type: SAM; Serial: TP-1474
- DASY52 52.8.1(838); SEMCAD X 14.6.5(6469)

Configuration/Head/Area Scan (8x12x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.238 mW/g

Configuration/Head/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm


Reference Value = 10.602 V/m; Power Drift = 0.03 dB

Peak SAR (extrapolated) = 0.278 mW/g

SAR(1 g) = 0.227 mW/g; SAR(10 g) = 0.175 mW/g

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.237 mW/g

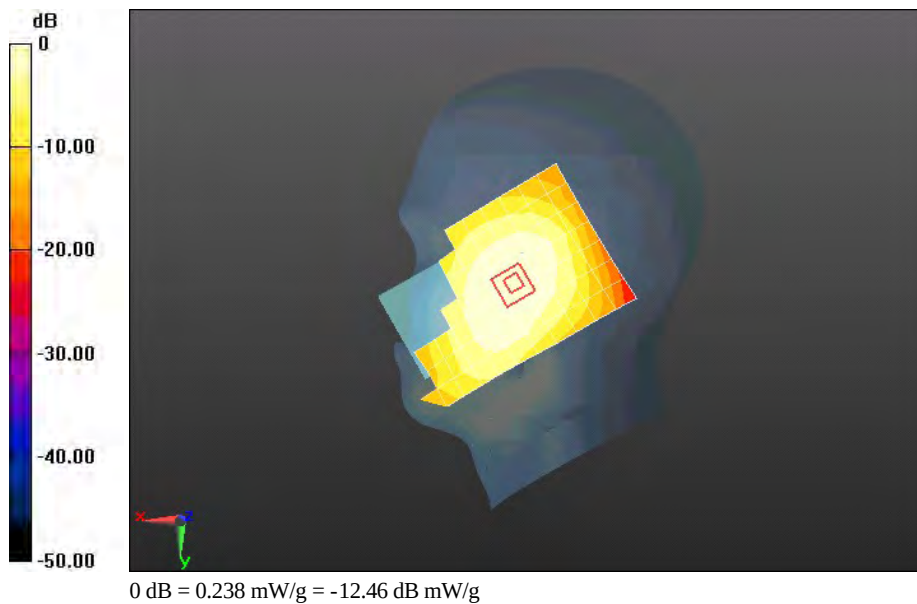

Test Laboratory: HUAWEI SAR Lab

U9202L-1 WCDMA850 4182CH Towards Phantom 10mm

DUT: U9202L-1; Type: Ascend P1; HSPA+/HSUPA/HSDPA/UMTS/GSM/GPRS/EDGE Mobile Phone with Bluetooth; Serial: SAR1

Communication System: HW-UMTS-FDD; Frequency: 836.4 MHz

Medium parameters used (interpolated): $f = 836.4$ MHz; $\sigma = 0.977$ mho/m; $\epsilon_r = 52.758$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3661; ConvF(9.64, 9.64, 9.64); Calibrated: 1/27/2012;
- Sensor-Surface: 4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE4 Sn679; Calibrated: 12/23/2011
- Phantom: SAM1; Type: SAM; Serial: TP-1475
- DASY52 52.8.1(838); SEMCAD X 14.6.6(6824)

Configuration/Body/Area Scan (8x13x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.555 W/kg


Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 23.465 V/m; Power Drift = -0.03 dB

Peak SAR (extrapolated) = 0.652 mW/g

SAR(1 g) = 0.530 mW/g; SAR(10 g) = 0.406 mW/g

[Info: Interpolated medium parameters used for SAR evaluation.](#)

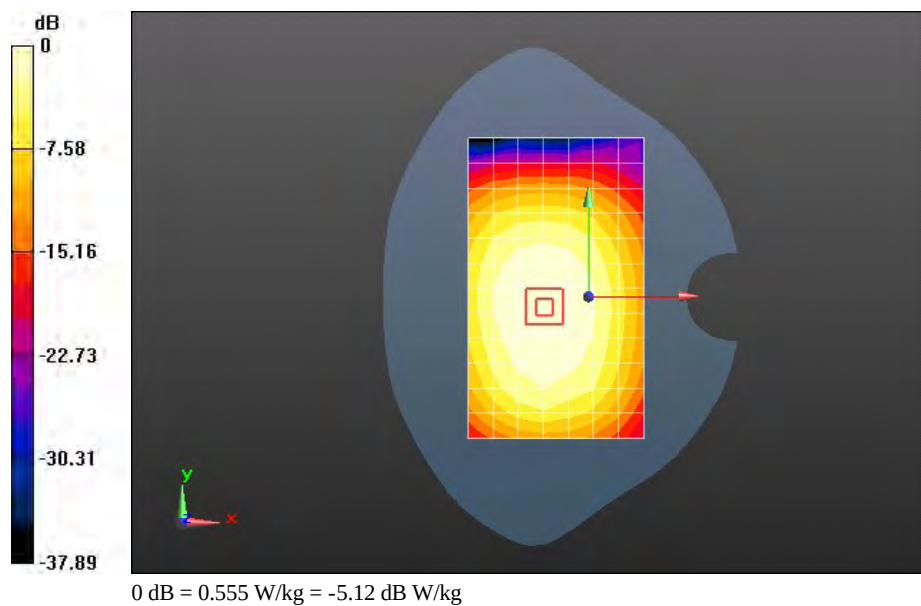

Test Laboratory: HUAWEI SAR Lab

U9202L-1 WCDMA850 4182CH Towards Ground 10mm

DUT: U9202L-1; Type: Ascend P1; HSPA+/HSUPA/HSDPA/UMTS/GSM/GPRS/EDGE Mobile Phone with Bluetooth; Serial: SAR1

Communication System: HW-UMTS-FDD; Frequency: 836.4 MHz

Medium parameters used (interpolated): $f = 836.4$ MHz; $\sigma = 0.977$ mho/m; $\epsilon_r = 52.758$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3661; ConvF(9.64, 9.64, 9.64); Calibrated: 1/27/2012;
- Sensor-Surface: 4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE4 Sn679; Calibrated: 12/23/2011
- Phantom: SAM1; Type: SAM; Serial: TP-1475
- DASY52 52.8.1(838); SEMCAD X 14.6.6(6824)

Configuration/Body/Area Scan (8x13x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.789 W/kg

Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm


Reference Value = 26.881 V/m; Power Drift = 0.08 dB

Peak SAR (extrapolated) = 0.951 mW/g


SAR(1 g) = 0.757 mW/g; SAR(10 g) = 0.570 mW/g

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.797 W/kg

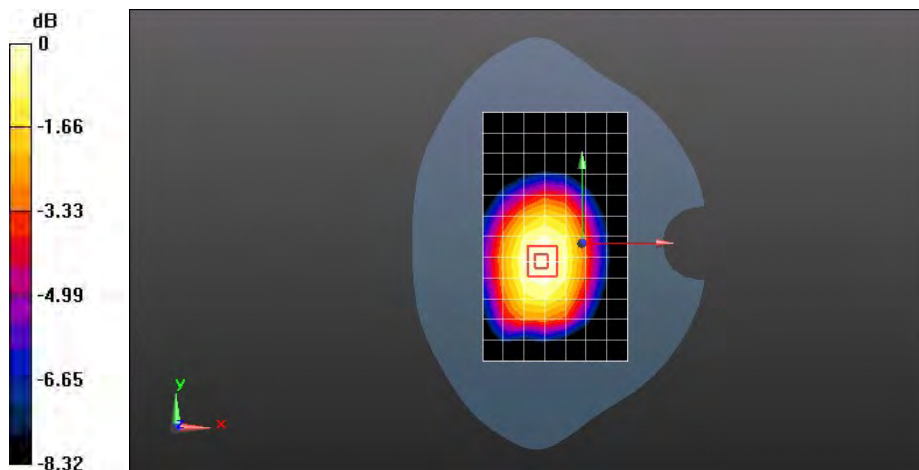

0 dB = 0.797 W/kg = -1.97 dB W/kg

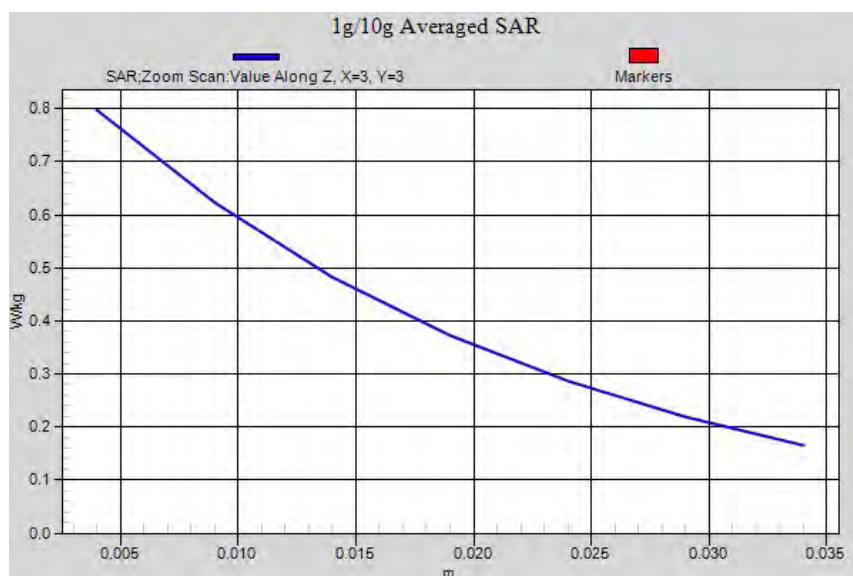

Test Laboratory: HUAWEI SAR Lab

U9202L-1 WCDMA850 4182CH Left edge 10mm

DUT: U9202L-1; Type: Ascend P1; HSPA+/HSUPA/HSDPA/UMTS/GSM/GPRS/EDGE Mobile Phone with Bluetooth; Serial: SAR1

Communication System: HW-UMTS-FDD; Frequency: 836.4 MHz

Medium parameters used (interpolated): $f = 836.4$ MHz; $\sigma = 0.977$ mho/m; $\epsilon_r = 52.758$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3661; ConvF(9.64, 9.64, 9.64); Calibrated: 1/27/2012;
- Sensor-Surface: 4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE4 Sn679; Calibrated: 12/23/2011
- Phantom: SAM1; Type: SAM; Serial: TP-1475
- DASY52 52.8.1(838); SEMCAD X 14.6.6(6824)

Configuration/Body/Area Scan (8x13x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.619 W/kg

Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm


Reference Value = 21.609 V/m; Power Drift = 0.09 dB

Peak SAR (extrapolated) = 0.839 mW/g

SAR(1 g) = 0.598 mW/g; SAR(10 g) = 0.410 mW/g

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.642 W/kg

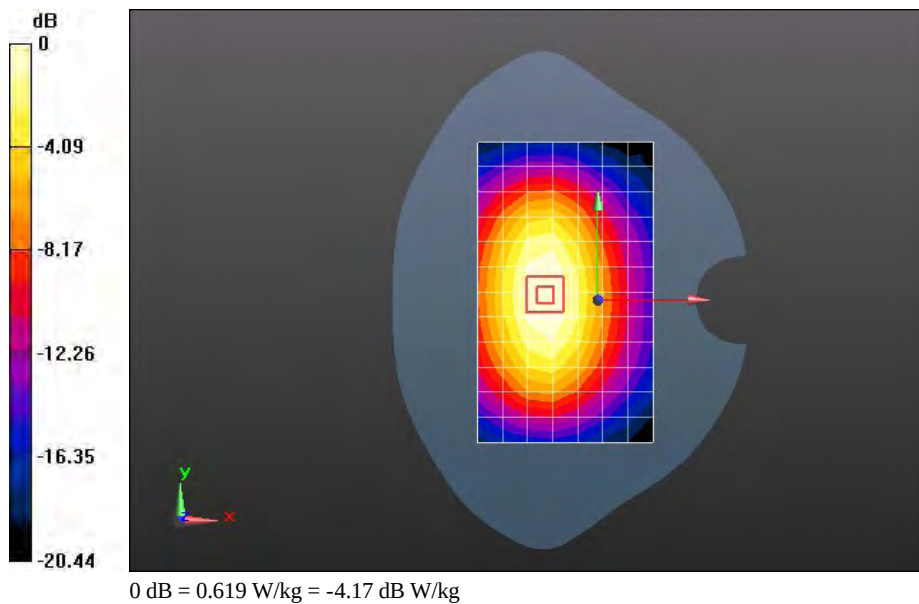

Test Laboratory: HUAWEI SAR Lab

U9202L-1 WCDMA850 4182CH Right edge 10mm

DUT: U9202L-1; Type: Ascend P1; HSPA+/HSUPA/HSDPA/UMTS/GSM/GPRS/EDGE Mobile Phone with Bluetooth; Serial: SAR1

Communication System: HW-UMTS-FDD; Frequency: 836.4 MHz

Medium parameters used (interpolated): $f = 836.4$ MHz; $\sigma = 0.977$ mho/m; $\epsilon_r = 52.758$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3661; ConvF(9.64, 9.64, 9.64); Calibrated: 1/27/2012;
- Sensor-Surface: 4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE4 Sn679; Calibrated: 12/23/2011
- Phantom: SAM1; Type: SAM; Serial: TP-1475
- DASY52 52.8.1(838); SEMCAD X 14.6.6(6824)

Configuration/Body/Area Scan (8x13x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.561 W/kg

Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm


Reference Value = 17.874 V/m; Power Drift = 0.13 dB

Peak SAR (extrapolated) = 0.758 mW/g

SAR(1 g) = 0.543 mW/g; SAR(10 g) = 0.374 mW/g

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.580 W/kg

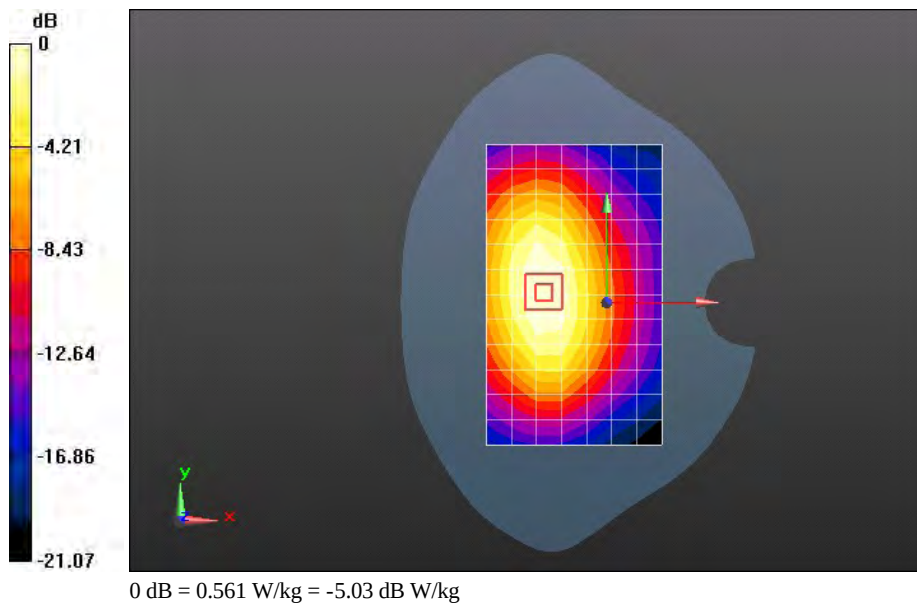

Test Laboratory: HUAWEI SAR Lab

U9202L-1 WCDMA850 4182CH Bottom edge 10mm

DUT: U9202L-1; Type: Ascend P1; HSPA+/HSUPA/HSDPA/UMTS/GSM/GPRS/EDGE Mobile Phone with Bluetooth; Serial: SAR1

Communication System: HW-UMTS-FDD; Frequency: 836.4 MHz

Medium parameters used (interpolated): $f = 836.4$ MHz; $\sigma = 0.977$ mho/m; $\epsilon_r = 52.758$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3661; ConvF(9.64, 9.64, 9.64); Calibrated: 1/27/2012;
- Sensor-Surface: 4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE4 Sn679; Calibrated: 12/23/2011
- Phantom: SAM1; Type: SAM; Serial: TP-1475
- DASY52 52.8.1(838); SEMCAD X 14.6.6(6824)

Configuration/Body/Area Scan (8x13x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.0539 W/kg

Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm


Reference Value = 6.047 V/m; Power Drift = -0.15 dB

Peak SAR (extrapolated) = 0.092 mW/g

SAR(1 g) = 0.056 mW/g; SAR(10 g) = 0.033 mW/g

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.0622 W/kg

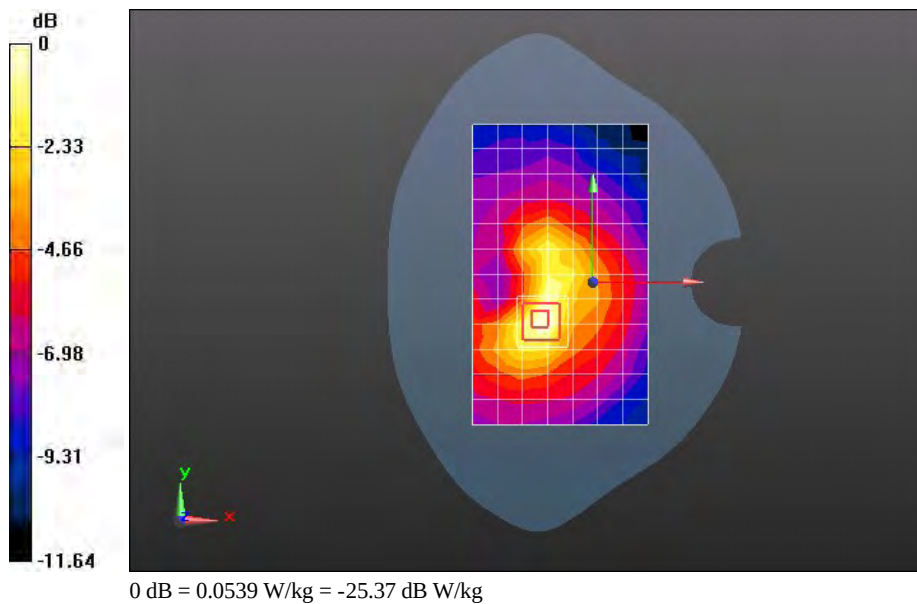

Test Laboratory: HUAWEI SAR Lab

U9202L-1 WCDMA850 4182CH Towards Ground with Headset 10mm

DUT: U9202L-1; Type: Ascend P1; HSPA+/HSUPA/HSDPA/UMTS/GSM/GPRS/EDGE Mobile Phone with Bluetooth; Serial: SAR1

Communication System: HW-UMTS-FDD; Frequency: 836.4 MHz

Medium parameters used (interpolated): $f = 836.4$ MHz; $\sigma = 0.977$ mho/m; $\epsilon_r = 52.758$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3661; ConvF(9.64, 9.64, 9.64); Calibrated: 1/27/2012;
- Sensor-Surface: 4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE4 Sn679; Calibrated: 12/23/2011
- Phantom: SAM1; Type: SAM; Serial: TP-1475
- DASY52 52.8.1(838); SEMCAD X 14.6.6(6824)

Configuration/Body/Area Scan (8x13x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.545 W/kg

Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm


Reference Value = 21.983 V/m; Power Drift = 0.17 dB

Peak SAR (extrapolated) = 0.670 mW/g

SAR(1 g) = 0.536 mW/g; SAR(10 g) = 0.405 mW/g

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.561 W/kg

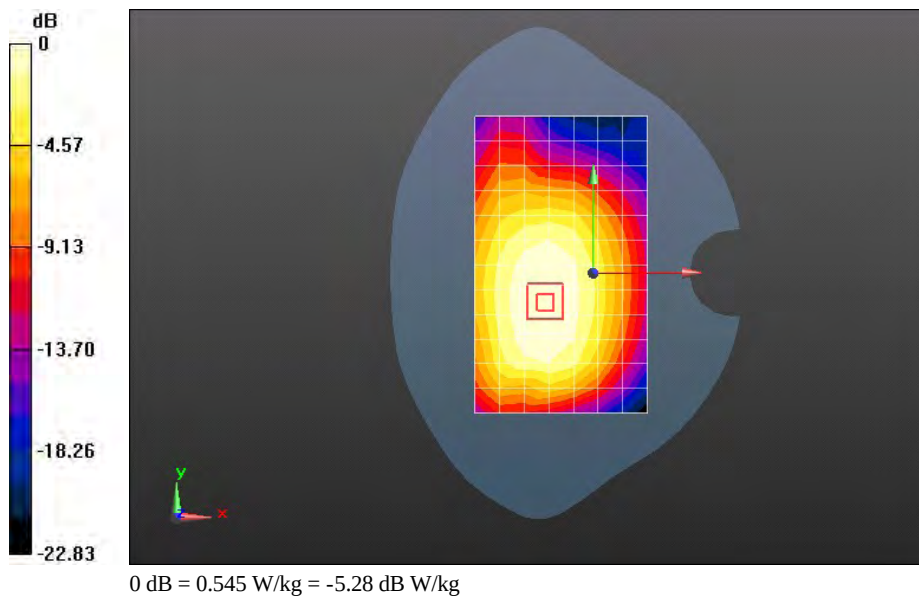

Test Laboratory: HUAWEI SAR Lab

U9202L-1 WiFi 11b 1CH Left hand touch cheek

DUT: U9202L-1; Type: Ascend P1; HSPA+/HSUPA/HSDPA/UMTS/GSM/GPRS/EDGE Mobile Phone with Bluetooth; Serial: SAR1

Communication System: WiFi (802.11*); Frequency: 2412 MHz

Medium parameters used: $f = 2412$ MHz; $\sigma = 1.787$ mho/m; $\epsilon_r = 39.152$; $\rho = 1000$ kg/m³

Phantom section: Left Section

DASY Configuration:

- Probe: EX3DV4 - SN3661; ConvF(7.48, 7.48, 7.48); Calibrated: 1/27/2012;
- Sensor-Surface: 4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE4 Sn679; Calibrated: 12/23/2011
- Phantom: SAM 2; Type: SAM; Serial: TP-1474
- DASY52 52.8.1(838); SEMCAD X 14.6.5(6469)

Configuration/Head/Area Scan (8x12x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 0.133 mW/g


Configuration/Head/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 6.504 V/m; Power Drift = 0.18 dB

Peak SAR (extrapolated) = 0.297 mW/g

SAR(1 g) = 0.135 mW/g; SAR(10 g) = 0.064 mW/g

Maximum value of SAR (measured) = 0.146 mW/g

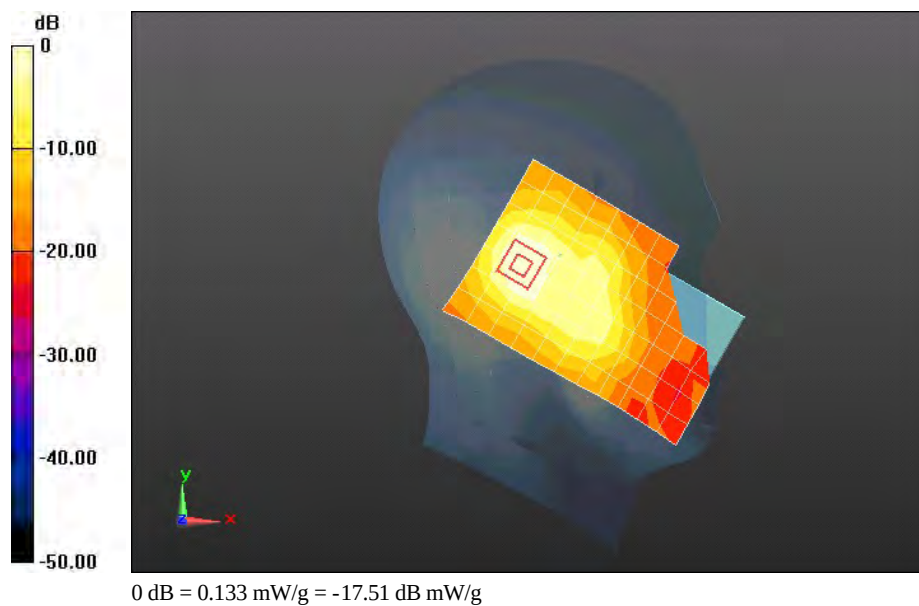

Test Laboratory: HUAWEI SAR Lab

U9202L-1 WiFi 11b 1CH Left hand tilt 15 degree

DUT: U9202L-1; Type: Ascend P1; HSPA+/HSUPA/HSDPA/UMTS/GSM/GPRS/EDGE Mobile Phone with Bluetooth; Serial: SAR1

Communication System: WiFi (802.11*); Frequency: 2412 MHz

Medium parameters used: $f = 2412$ MHz; $\sigma = 1.787$ mho/m; $\epsilon_r = 39.152$; $\rho = 1000$ kg/m³

Phantom section: Left Section

DASY Configuration:

- Probe: EX3DV4 - SN3661; ConvF(7.48, 7.48, 7.48); Calibrated: 1/27/2012;
- Sensor-Surface: 4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE4 Sn679; Calibrated: 12/23/2011
- Phantom: SAM 2; Type: SAM; Serial: TP-1474
- DASY52 52.8.1(838); SEMCAD X 14.6.5(6469)

Configuration/Head/Area Scan (8x12x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 0.176 mW/g


Configuration/Head/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 7.559 V/m; Power Drift = 0.10 dB

Peak SAR (extrapolated) = 0.389 mW/g

SAR(1 g) = 0.177 mW/g; SAR(10 g) = 0.082 mW/g

Maximum value of SAR (measured) = 0.194 mW/g

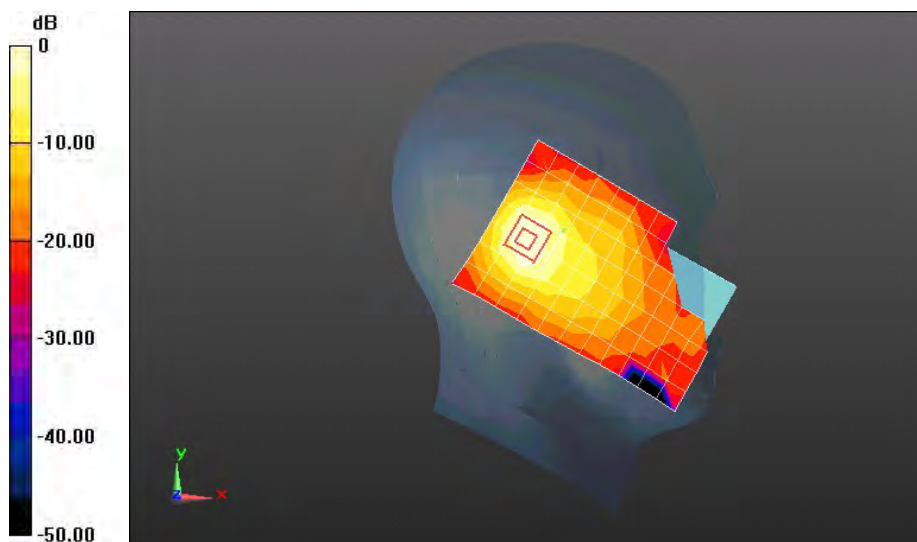

0 dB = 0.176 mW/g = -15.10 dB mW/g

Test Laboratory: HUAWEI SAR Lab

U9202L-1 WiFi 11b 1CH Right hand touch cheek

DUT: U9202L-1; Type: Ascend P1; HSPA+/HSUPA/HSDPA/UMTS/GSM/GPRS/EDGE Mobile Phone with Bluetooth; Serial: SAR1

Communication System: WiFi (802.11*); Frequency: 2412 MHz

Medium parameters used: $f = 2412$ MHz; $\sigma = 1.787$ mho/m; $\epsilon_r = 39.152$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY Configuration:

- Probe: EX3DV4 - SN3661; ConvF(7.48, 7.48, 7.48); Calibrated: 1/27/2012;
- Sensor-Surface: 4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE4 Sn679; Calibrated: 12/23/2011
- Phantom: SAM 2; Type: SAM; Serial: TP-1474
- DASY52 52.8.1(838); SEMCAD X 14.6.5(6469)

Configuration/Head/Area Scan (8x12x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 0.143 mW/g


Configuration/Head/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 5.872 V/m; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 0.352 mW/g

SAR(1 g) = 0.156 mW/g; SAR(10 g) = 0.074 mW/g

Maximum value of SAR (measured) = 0.174 mW/g

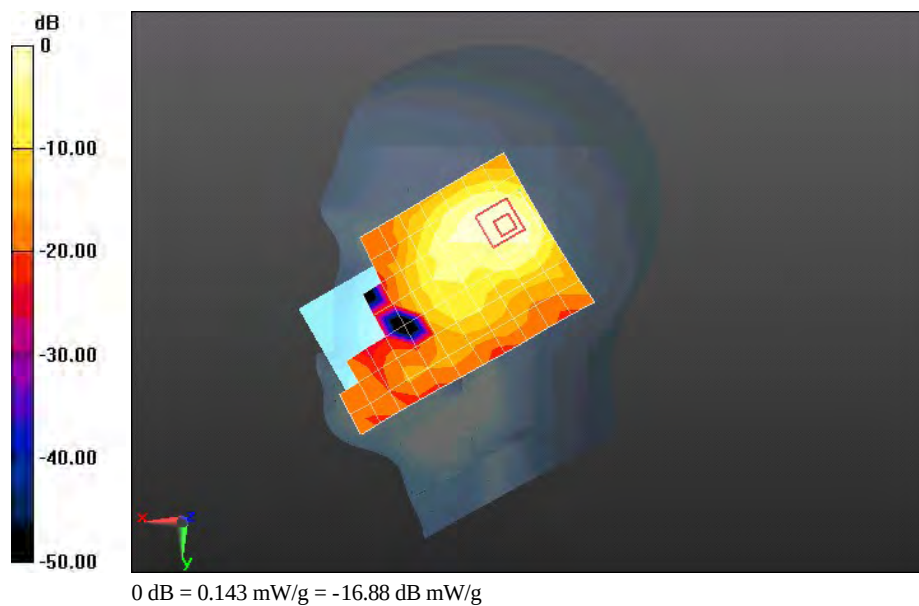

Test Laboratory: HUAWEI SAR Lab

U9202L-1 WiFi 11b 1CH Right hand tilt 15 degree**DUT: U9202L-1; Type: Ascend P1; HSPA+/HSUPA/HSDPA/UMTS/GSM/GPRS/EDGE Mobile Phone with Bluetooth; Serial: SAR1**

Communication System: WiFi (802.11*); Frequency: 2412 MHz

Medium parameters used: $f = 2412$ MHz; $\sigma = 1.787$ mho/m; $\epsilon_r = 39.152$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY Configuration:

- Probe: EX3DV4 - SN3661; ConvF(7.48, 7.48, 7.48); Calibrated: 1/27/2012;
- Sensor-Surface: 4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE4 Sn679; Calibrated: 12/23/2011
- Phantom: SAM 2; Type: SAM; Serial: TP-1474
- DASY52 52.8.1(838); SEMCAD X 14.6.6(6824)

Configuration/Head/Area Scan (8x12x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 0.187 W/kg



Configuration/Head/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 7.492 V/m; Power Drift = -0.03 dB

Peak SAR (extrapolated) = 0.577 mW/g

SAR(1 g) = 0.243 mW/g; SAR(10 g) = 0.105 mW/g

Maximum value of SAR (measured) = 0.284 W/kg

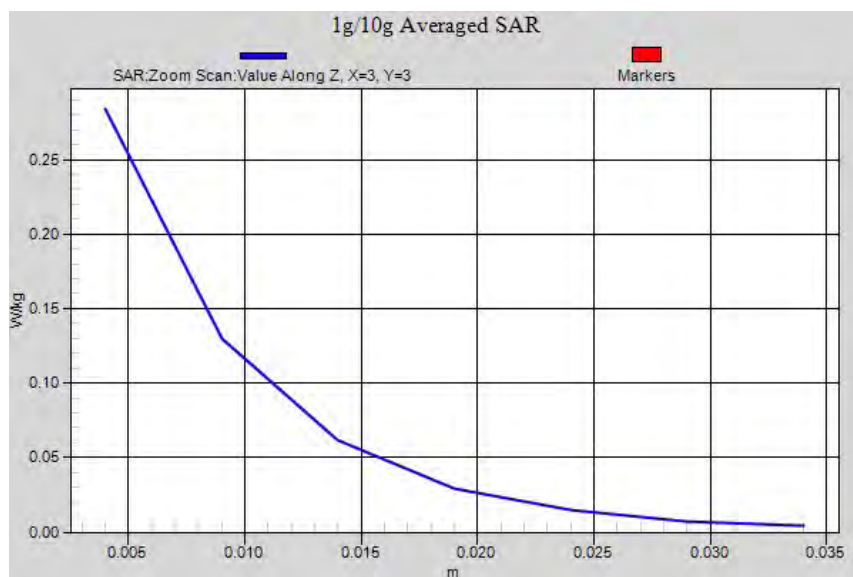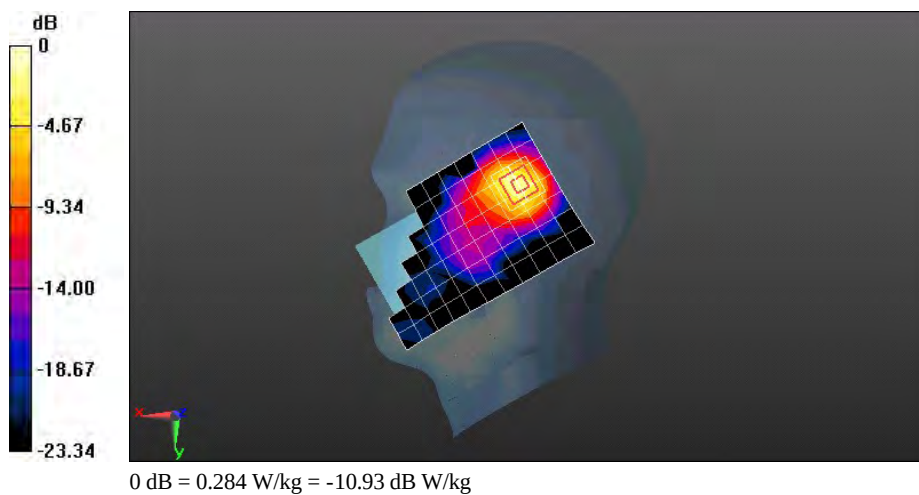

Test Laboratory: HUAWEI SAR Lab

U9202L-1 WiFi 11b 1CH Towards Phantom 10mm

DUT: U9202L-1; Type: Ascend P1; HSPA+/HSUPA/HSDPA/UMTS/GSM/GPRS/EDGE Mobile Phone with Bluetooth; Serial: SAR1

Communication System: WiFi (802.11*); Frequency: 2412 MHz

Medium parameters used: $f = 2412$ MHz; $\sigma = 1.963$ mho/m; $\epsilon_r = 52.359$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3661; ConvF(7.5, 7.5, 7.5); Calibrated: 1/27/2012;
- Sensor-Surface: 4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE4 Sn679; Calibrated: 12/23/2011
- Phantom: SAM 2; Type: SAM; Serial: TP-1474
- DASY52 52.8.1(838); SEMCAD X 14.6.6(6824)

Configuration/Body/Area Scan (8x12x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 0.0501 W/kg


Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 3.472 V/m; Power Drift = 0.16 dB

Peak SAR (extrapolated) = 0.093 mW/g

SAR(1 g) = 0.048 mW/g; SAR(10 g) = 0.024 mW/g

Maximum value of SAR (measured) = 0.0539 W/kg

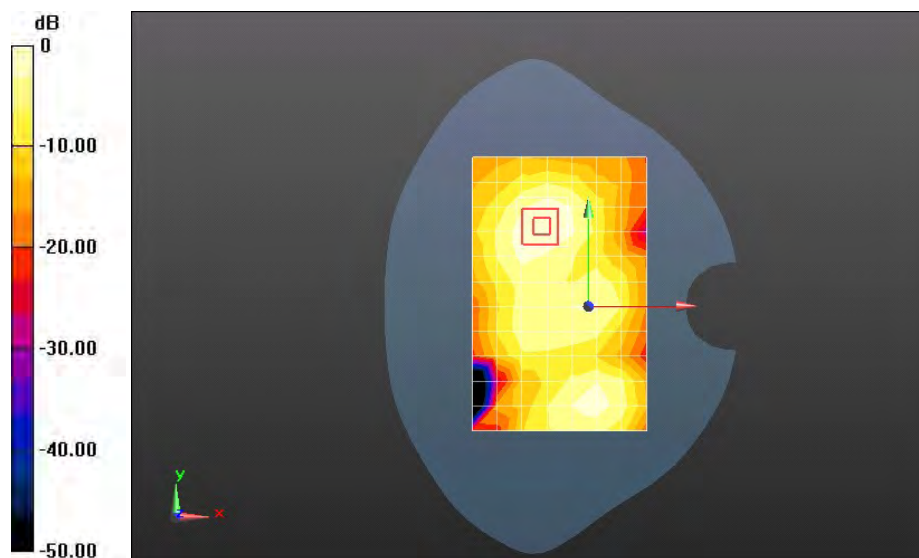

0 dB = 0.0539 W/kg = -25.37 dB W/kg

Test Laboratory: HUAWEI SAR Lab

U9202L-1 WiFi 11b 1CH Towards Ground 10mm**DUT: U9202L-1; Type: Ascend P1; HSPA+/HSUPA/HSDPA/UMTS/GSM/GPRS/EDGE Mobile Phone with Bluetooth; Serial: SAR1**

Communication System: WiFi (802.11*); Frequency: 2412 MHz

Medium parameters used: $f = 2412$ MHz; $\sigma = 1.963$ mho/m; $\epsilon_r = 52.359$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3661; ConvF(7.5, 7.5, 7.5); Calibrated: 1/27/2012;
- Sensor-Surface: 4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE4 Sn679; Calibrated: 12/23/2011
- Phantom: SAM 2; Type: SAM; Serial: TP-1474
- DASY52 52.8.1(838); SEMCAD X 14.6.6(6824)

Configuration/Body/Area Scan (8x12x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.120 W/kg



Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 3.219 V/m; Power Drift = 0.18 dB

Peak SAR (extrapolated) = 0.293 mW/g

SAR(1 g) = 0.140 mW/g; SAR(10 g) = 0.067 mW/g

Maximum value of SAR (measured) = 0.157 W/kg

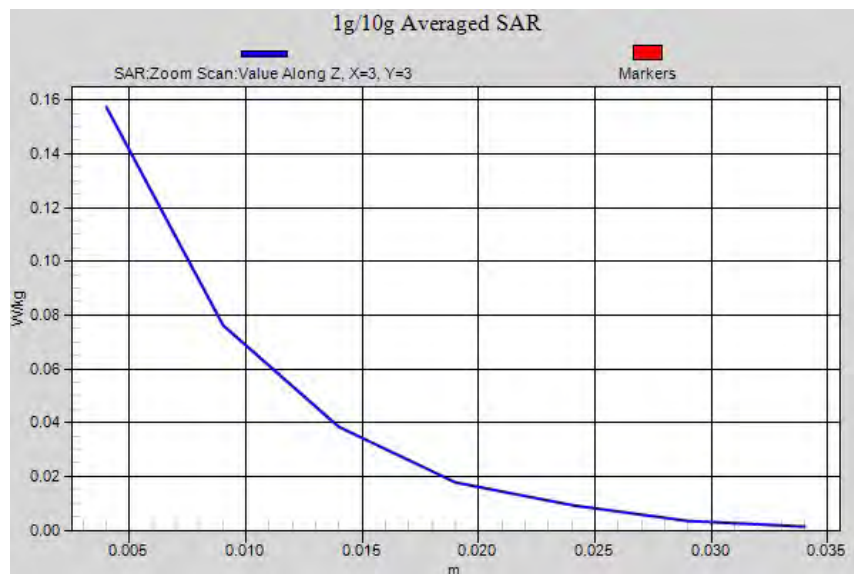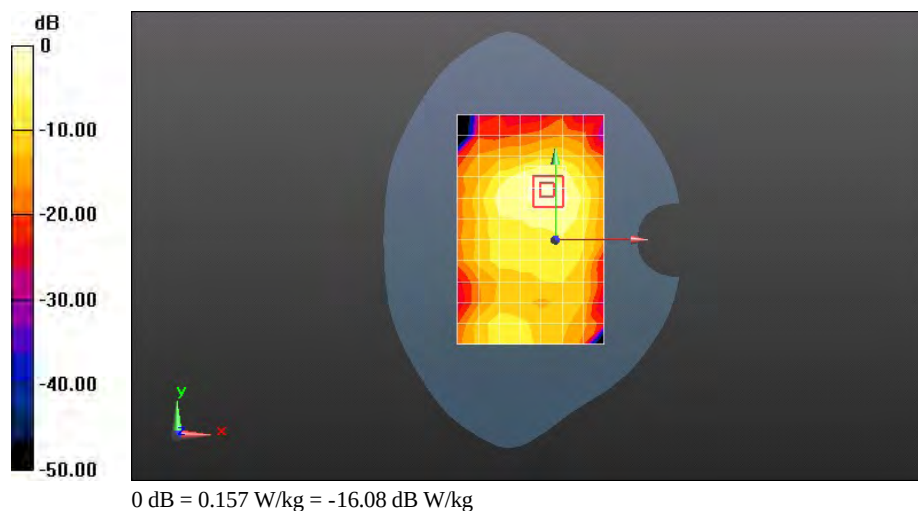

Test Laboratory: HUAWEI SAR Lab

U9202L-1 WiFi 11b 1CH Left edge 10mm

DUT: U9202L-1; Type: Ascend P1; HSPA+/HSUPA/HSDPA/UMTS/GSM/GPRS/EDGE Mobile Phone with Bluetooth; Serial: SAR1

Communication System: WiFi (802.11*); Frequency: 2412 MHz

Medium parameters used: $f = 2412$ MHz; $\sigma = 1.963$ mho/m; $\epsilon_r = 52.359$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3661; ConvF(7.5, 7.5, 7.5); Calibrated: 1/27/2012;
- Sensor-Surface: 4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE4 Sn679; Calibrated: 12/23/2011
- Phantom: SAM 2; Type: SAM; Serial: TP-1474
- DASY52 52.8.1(838); SEMCAD X 14.6.6(6824)

Configuration/Body/Area Scan (8x12x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 0.0185 W/kg

Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 2.606 V/m; Power Drift = 0.14 dB

Peak SAR (extrapolated) = 0.022 mW/g

SAR(1 g) = 0.011 mW/g; SAR(10 g) = 0.00502 mW/g

Maximum value of SAR (measured) = 0.0133 W/kg



Test Laboratory: HUAWEI SAR Lab

U9202L-1 WiFi 11b 1CH Right edge 10mm

DUT: U9202L-1; Type: Ascend P1; HSPA+/HSUPA/HSDPA/UMTS/GSM/GPRS/EDGE Mobile Phone with Bluetooth; Serial: SAR1

Communication System: WiFi (802.11*); Frequency: 2412 MHz

Medium parameters used: $f = 2412$ MHz; $\sigma = 1.963$ mho/m; $\epsilon_r = 52.359$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3661; ConvF(7.5, 7.5, 7.5); Calibrated: 1/27/2012;
- Sensor-Surface: 4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE4 Sn679; Calibrated: 12/23/2011
- Phantom: SAM 2; Type: SAM; Serial: TP-1474
- DASY52 52.8.1(838); SEMCAD X 14.6.6(6824)

Configuration/Body/Area Scan (8x12x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 0.0219 W/kg


Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 2.328 V/m; Power Drift = -0.17 dB

Peak SAR (extrapolated) = 0.032 mW/g

SAR(1 g) = 0.016 mW/g; SAR(10 g) = 0.00669 mW/g

Maximum value of SAR (measured) = 0.0182 W/kg

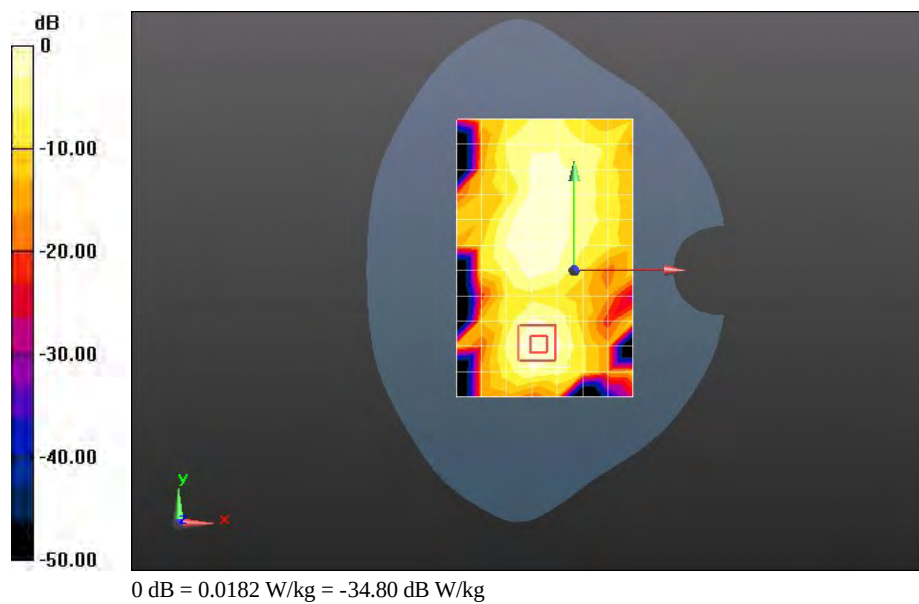

Test Laboratory: HUAWEI SAR Lab

U9202L-1 WiFi 11b 1CH Top edge 10mm

DUT: U9202L-1; Type: Ascend P1; HSPA+/HSUPA/HSDPA/UMTS/GSM/GPRS/EDGE Mobile Phone with Bluetooth; Serial: SAR1

Communication System: WiFi (802.11*); Frequency: 2412 MHz

Medium parameters used: $f = 2412$ MHz; $\sigma = 1.963$ mho/m; $\epsilon_r = 52.359$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3661; ConvF(7.5, 7.5, 7.5); Calibrated: 1/27/2012;
- Sensor-Surface: 4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE4 Sn679; Calibrated: 12/23/2011
- Phantom: SAM 2; Type: SAM; Serial: TP-1474
- DASY52 52.8.1(838); SEMCAD X 14.6.6(6824)

Configuration/Body/Area Scan (8x12x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 0.109 W/kg

Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 6.464 V/m; Power Drift = 0.14 dB

Peak SAR (extrapolated) = 0.229 mW/g

SAR(1 g) = 0.111 mW/g; SAR(10 g) = 0.050 mW/g

Maximum value of SAR (measured) = 0.126 W/kg

