

**Appendix B. SAR Measurement Plots**

Table of contents
GSM850 MHz Head
GSM850 MHz Body
GSM1900 MHz Head
GSM1900 MHz Body
WCDMA850 MHz Head
WCDMA850 MHz Body
WCDMA1700 MHz Head
WCDMA1700 MHz Body
WCDMA1900 MHz Head
WCDMA1900 MHz Body
WiFi2450 MHz Head
WiFi2450 MHz Body

Test Laboratory: HUAWEI SAR Lab

U9500 GSM850 190CH Left hand touch cheek

DUT: U9500; Type: HSPA+/HSUPA/HSDPA/UMTS/GSM/GPRS/EDGE Mobile Phone with Bluetooth; Serial: SAR2

Communication System: HW-GSM\GPRS\EGPRS-1TS; Frequency: 836.6 MHz

Medium parameters used: $f = 837$ MHz; $\sigma = 0.913$ mho/m; $\epsilon_r = 41.093$; $\rho = 1000$ kg/m³

Phantom section: Left Section

DASY Configuration:

- Probe: EX3DV4 - SN3736; ConvF(9.04, 9.04, 9.04); Calibrated: 11/23/2011
- Sensor-Surface: 4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE4 Sn852; Calibrated: 11/16/2011
- Phantom: SAM4; Type: SAM; Serial: TP-1620
- DASY52 52.8.0(692); SEMCAD X 14.6.4(4989)

Configuration/Head/Area Scan (8x12x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 0.270 mW/g


Configuration/Head/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 5.708 V/m; Power Drift = 0.10 dB

Peak SAR (extrapolated) = 0.3370

SAR(1 g) = 0.270 mW/g; SAR(10 g) = 0.204 mW/g

Maximum value of SAR (measured) = 0.287 mW/g

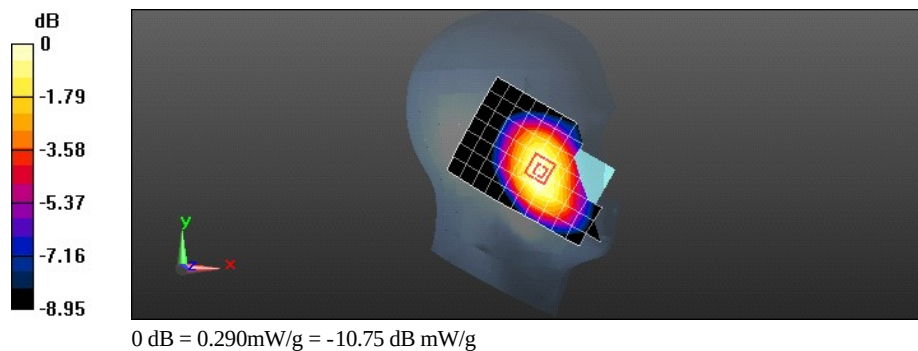

Test Laboratory: HUAWEI SAR Lab

U9500 GSM850 190CH Left hand tilt 15 degree

DUT: U9500; Type: HSPA+/HSUPA/HSDPA/UMTS/GSM/GPRS/EDGE Mobile Phone with Bluetooth; Serial: SAR2

Communication System: HW-GSM\GPRS\EGPRS-1TS; Frequency: 836.6 MHz

Medium parameters used: $f = 837$ MHz; $\sigma = 0.913$ mho/m; $\epsilon_r = 41.093$; $\rho = 1000$ kg/m³

Phantom section: Left Section

DASY Configuration:

- Probe: EX3DV4 - SN3736; ConvF(9.04, 9.04, 9.04); Calibrated: 11/23/2011
- Sensor-Surface: 4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE4 Sn852; Calibrated: 11/16/2011
- Phantom: SAM4; Type: SAM; Serial: TP-1620
- DASY52 52.8.0(692); SEMCAD X 14.6.4(4989)

Configuration/Head/Area Scan (8x12x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 0.185 mW/g


Configuration/Head/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 9.345 V/m; Power Drift = -0.05 dB

Peak SAR (extrapolated) = 0.2300

SAR(1 g) = 0.182 mW/g; SAR(10 g) = 0.139 mW/g

Maximum value of SAR (measured) = 0.192 mW/g

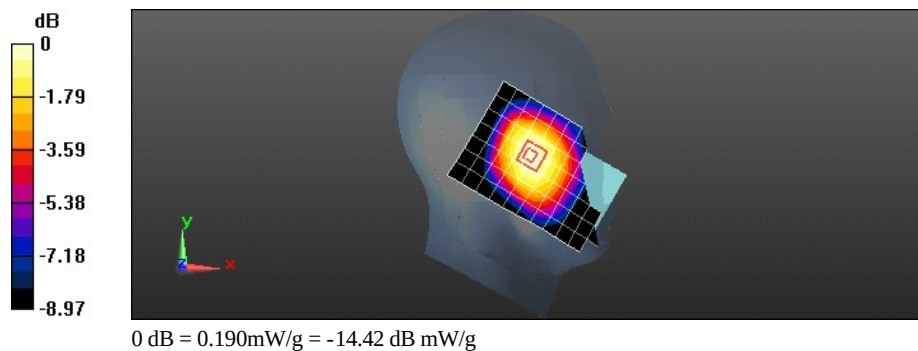

Test Laboratory: HUAWEI SAR Lab

U9500 GSM850 190CH Right hand touch cheek

DUT: U9500; Type: HSPA+/HSDPA/UMTS/GSM/GPRS/EDGE Mobile Phone with Bluetooth; Serial: SAR2

Communication System: HW-GSM\GPRS\EGPRS-1TS; Frequency: 836.6 MHz

Medium parameters used: $f = 837$ MHz; $\sigma = 0.913$ mho/m; $\epsilon_r = 41.093$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY Configuration:

- Probe: EX3DV4 - SN3736; ConvF(8.72, 8.72, 8.72); Calibrated: 11/23/2011
- Sensor-Surface: 4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE4 Sn852; Calibrated: 11/16/2011
- Phantom: SAM4; Type: SAM; Serial: TP-1620
- DASY52 52.8.0(692); SEMCAD X 14.6.4(4989)

Configuration/Head/Area Scan (8x12x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 0.332 mW/g



Configuration/Head/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 7.411 V/m; Power Drift = 0.05 dB

Peak SAR (extrapolated) = 0.4080

SAR(1 g) = 0.327 mW/g; SAR(10 g) = 0.251 mW/g

Maximum value of SAR (measured) = 0.345 mW/g

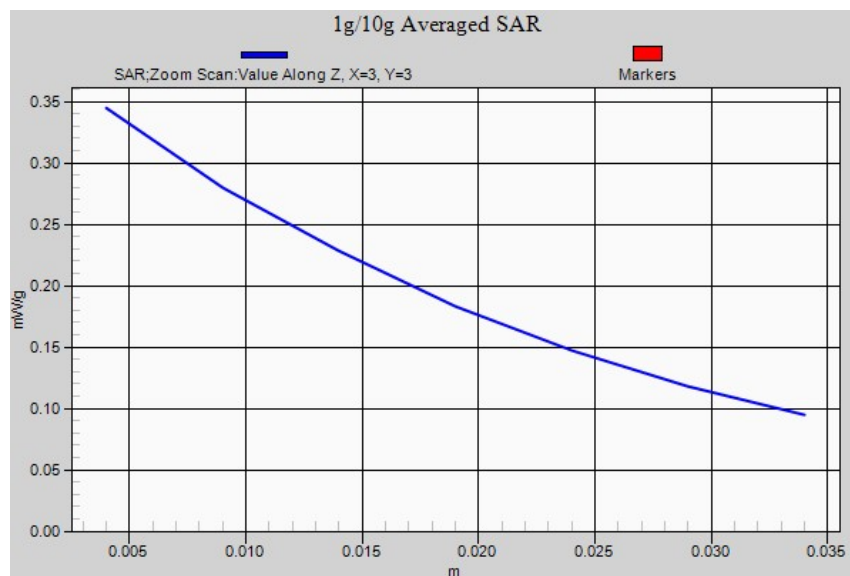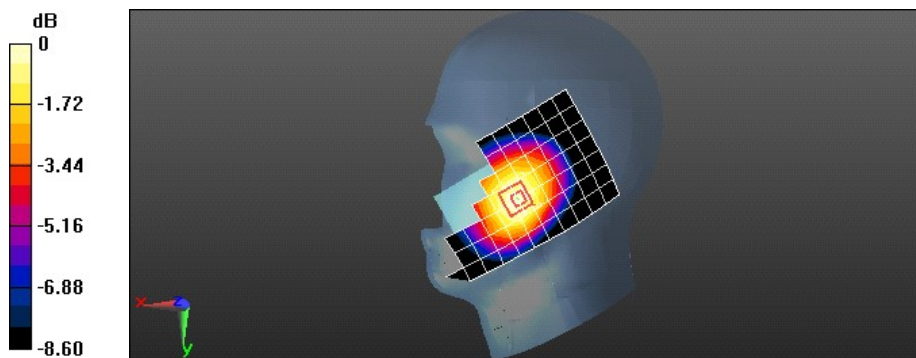

Test Laboratory: HUAWEI SAR Lab

U9500 GSM850 190CH Right hand tilt 15 degree

DUT: U9500; Type: HSPA+/HSUPA/HSDPA/UMTS/GSM/GPRS/EDGE Mobile Phone with Bluetooth; Serial: SAR2

Communication System: HW-GSM\GPRS\EGPRS-1TS; Frequency: 836.6 MHz

Medium parameters used: $f = 837$ MHz; $\sigma = 0.913$ mho/m; $\epsilon_r = 41.093$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY Configuration:

- Probe: EX3DV4 - SN3736; ConvF(9.04, 9.04, 9.04); Calibrated: 11/23/2011
- Sensor-Surface: 4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE4 Sn852; Calibrated: 11/16/2011
- Phantom: SAM4; Type: SAM; Serial: TP-1620
- DASY52 52.8.0(692); SEMCAD X 14.6.4(4989)

Configuration/Head/Area Scan (8x12x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 0.212 mW/g


Configuration/Head/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 10.677 V/m; Power Drift = -0.03 dB

Peak SAR (extrapolated) = 0.2620

SAR(1 g) = 0.207 mW/g; SAR(10 g) = 0.158 mW/g

Maximum value of SAR (measured) = 0.218 mW/g

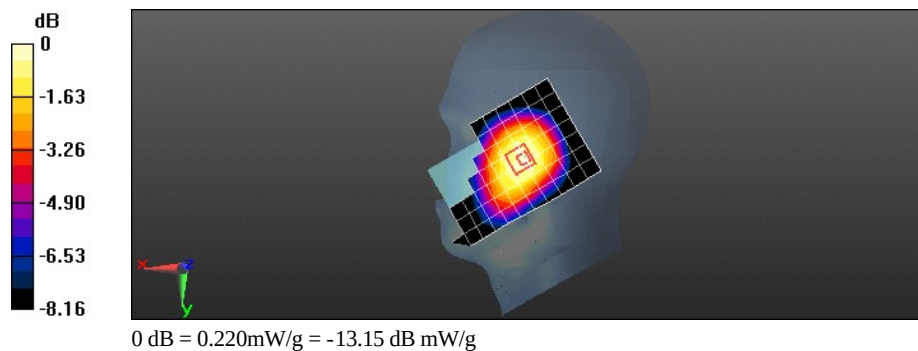

Test Laboratory: HUAWEI SAR Lab

U9500 GSM850 GPRS 1TS 190CH Towards Phantom 10mm

DUT: U9500; Type: HSPA+/HSUPA/HSDPA/UMTS/GSM/GPRS/EDGE Mobile Phone with Bluetooth; Serial: SAR2

Communication System: HW-GSM\GPRS\EGPRS-1TS; Frequency: 836.6 MHz

Medium parameters used: $f = 837$ MHz; $\sigma = 0.989$ mho/m; $\epsilon_r = 53.725$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3736; ConvF(9.11, 9.11, 9.11); Calibrated: 11/23/2011
- Sensor-Surface: 4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE4 Sn852; Calibrated: 11/16/2011
- Phantom: SAM4; Type: SAM; Serial: TP-1620
- DASY52 52.8.0(692); SEMCAD X 14.6.4(4989)

Configuration/Body/Area Scan (8x12x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 0.425 mW/g


Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 20.362 V/m; Power Drift = 0.03 dB

Peak SAR (extrapolated) = 0.5120

SAR(1 g) = 0.407 mW/g; SAR(10 g) = 0.310 mW/g

Maximum value of SAR (measured) = 0.427 mW/g

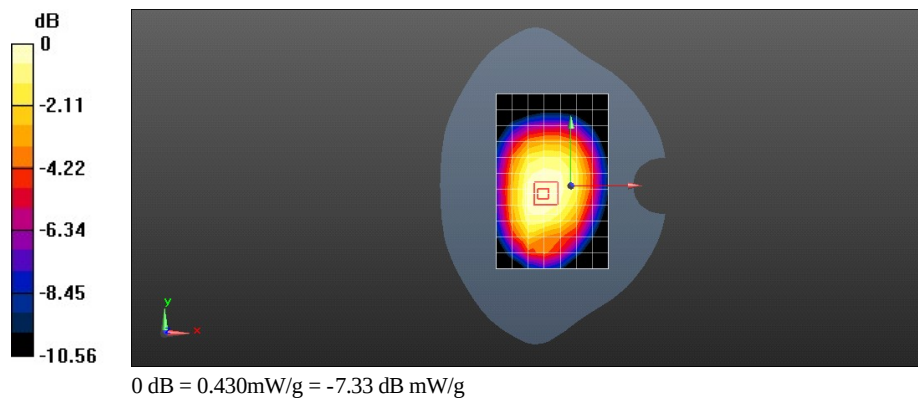

Test Laboratory: HUAWEI SAR Lab

U9500 GSM850 GPRS 2TS 190CH Towards Phantom 10mm

DUT: U9500; Type: HSPA+/HSUPA/HSDPA/UMTS/GSM/GPRS/EDGE Mobile Phone with Bluetooth; Serial: SAR2

Communication System: HW-GSM\GPRS\EGPRS-2TS; Frequency: 836.6 MHz

Medium parameters used: $f = 837$ MHz; $\sigma = 0.989$ mho/m; $\epsilon_r = 53.725$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3736; ConvF(9.11, 9.11, 9.11); Calibrated: 11/23/2011
- Sensor-Surface: 4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE4 Sn852; Calibrated: 11/16/2011
- Phantom: SAM4; Type: SAM; Serial: TP-1620
- DASY52 52.8.0(692); SEMCAD X 14.6.4(4989)

Configuration/Body/Area Scan (8x12x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 0.522 mW/g


Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 22.694 V/m; Power Drift = -0.04 dB

Peak SAR (extrapolated) = 0.6470

SAR(1 g) = 0.502 mW/g; SAR(10 g) = 0.383 mW/g

Maximum value of SAR (measured) = 0.526 mW/g

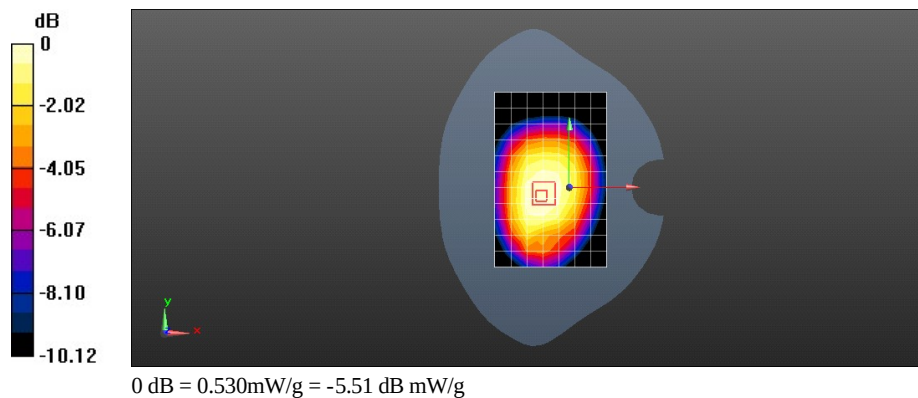

Test Laboratory: HUAWEI SAR Lab

U9500 GSM850 GPRS 2TS 190CH Towards Ground 10mm**DUT: U9500; Type: HSPA+/HSUPA/HSDPA/UMTS/GSM/GPRS/EDGE Mobile Phone with Bluetooth; Serial: SAR2**

Communication System: HW-GSM\GPRS\EGPRS-2TS; Frequency: 836.6 MHz

Medium parameters used: $f = 837$ MHz; $\sigma = 0.989$ mho/m; $\epsilon_r = 53.725$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3736; ConvF(9.11, 9.11, 9.11); Calibrated: 11/23/2011
- Sensor-Surface: 4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE4 Sn852; Calibrated: 11/16/2011
- Phantom: SAM4; Type: SAM; Serial: TP-1620
- DASY52 52.8.0(692); SEMCAD X 14.6.4(4989)

Configuration/Body/Area Scan (8x12x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 0.763 mW/g



Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 26.931 V/m; Power Drift = -0.02 dB

Peak SAR (extrapolated) = 0.9100

SAR(1 g) = 0.722 mW/g; SAR(10 g) = 0.543 mW/g

Maximum value of SAR (measured) = 0.760 mW/g

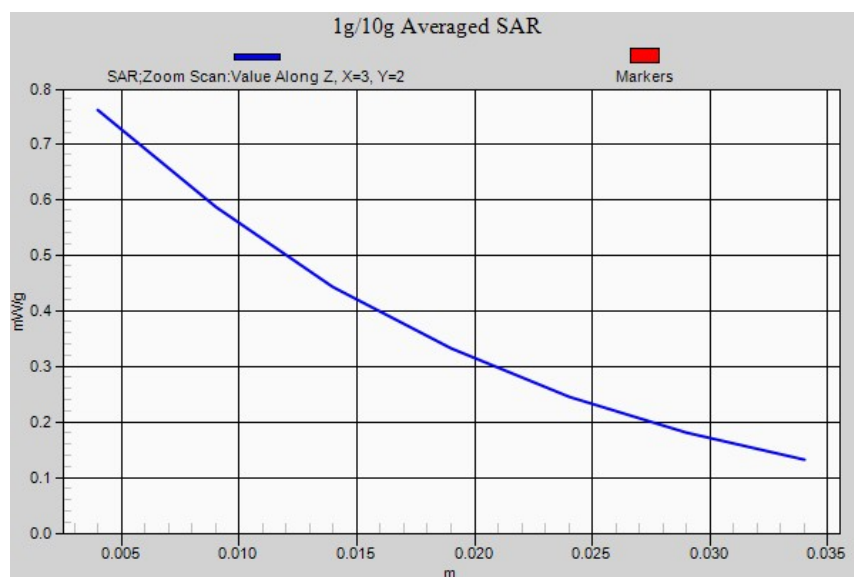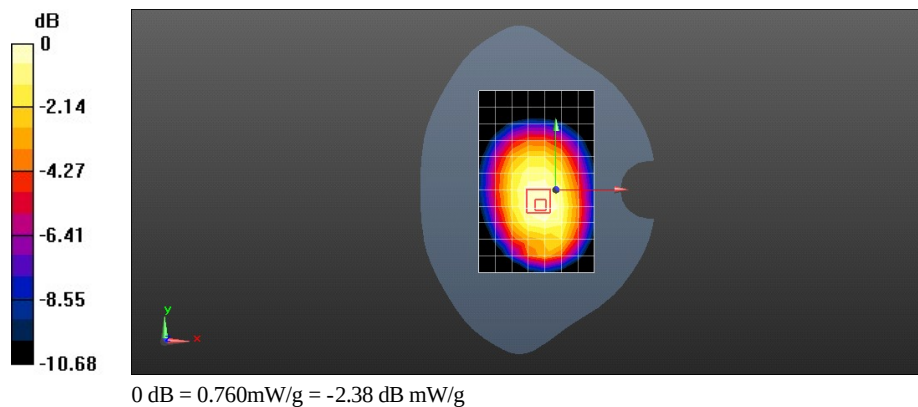

Test Laboratory: HUAWEI SAR Lab

U9500 GSM850 GPRS 2TS 190CH Left edge 10mm

DUT: U9500; Type: HSPA+/HSUPA/HSDPA/UMTS/GSM/GPRS/EDGE Mobile Phone with Bluetooth; Serial: SAR2

Communication System: HW-GSM\GPRS\EGPRS-2TS; Frequency: 836.6 MHz

Medium parameters used: $f = 837$ MHz; $\sigma = 0.989$ mho/m; $\epsilon_r = 53.725$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3736; ConvF(9.11, 9.11, 9.11); Calibrated: 11/23/2011
- Sensor-Surface: 4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE4 Sn852; Calibrated: 11/16/2011
- Phantom: SAM4; Type: SAM; Serial: TP-1620
- DASY52 52.8.0(692); SEMCAD X 14.6.4(4989)

Configuration/Body/Area Scan (8x12x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 0.567 mW/g


Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 24.097 V/m; Power Drift = 0.05 dB

Peak SAR (extrapolated) = 0.8290

SAR(1 g) = 0.568 mW/g; SAR(10 g) = 0.385 mW/g

Maximum value of SAR (measured) = 0.608 mW/g

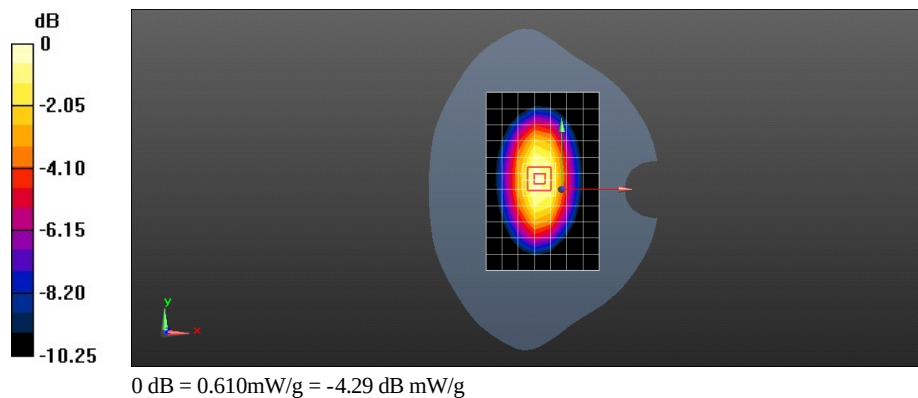

Test Laboratory: HUAWEI SAR Lab

U9500 GSM850 GPRS 2TS 190CH Right edge 10mm

DUT: U9500; Type: HSPA+/HSUPA/HSDPA/UMTS/GSM/GPRS/EDGE Mobile Phone with Bluetooth; Serial: SAR2

Communication System: HW-GSM\GPRS\EGPRS-2TS; Frequency: 836.6 MHz

Medium parameters used: $f = 837$ MHz; $\sigma = 0.989$ mho/m; $\epsilon_r = 53.725$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3736; ConvF(9.11, 9.11, 9.11); Calibrated: 11/23/2011
- Sensor-Surface: 4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE4 Sn852; Calibrated: 11/16/2011
- Phantom: SAM4; Type: SAM; Serial: TP-1620
- DASY52 52.8.0(692); SEMCAD X 14.6.4(4989)

Configuration/Body/Area Scan (8x12x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 0.683 mW/g


Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 26.769 V/m; Power Drift = 0.04 dB

Peak SAR (extrapolated) = 1.0020

SAR(1 g) = 0.681 mW/g; SAR(10 g) = 0.463 mW/g

Maximum value of SAR (measured) = 0.727 mW/g

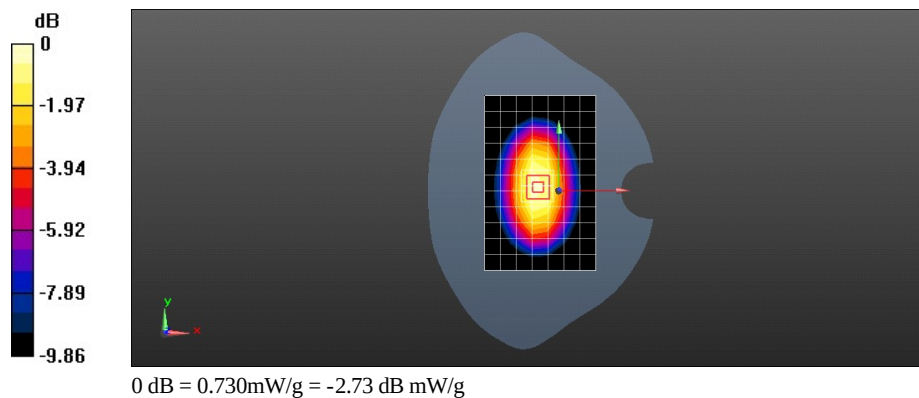

Test Laboratory: HUAWEI SAR Lab

U9500 GSM850 GPRS 2TS 190CH Bottom edge 10mm

DUT: U9500; Type: HSPA+/HSUPA/HSDPA/UMTS/GSM/GPRS/EDGE Mobile Phone with Bluetooth; Serial: SAR2

Communication System: HW-GSM\GPRS\EGPRS-2TS; Frequency: 836.6 MHz

Medium parameters used: $f = 837$ MHz; $\sigma = 0.989$ mho/m; $\epsilon_r = 53.725$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3736; ConvF(9.11, 9.11, 9.11); Calibrated: 11/23/2011
- Sensor-Surface: 4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE4 Sn852; Calibrated: 11/16/2011
- Phantom: SAM4; Type: SAM; Serial: TP-1620
- DASY52 52.8.0(692); SEMCAD X 14.6.4(4989)

Configuration/Body/Area Scan (8x12x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 0.150 mW/g


Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 10.397 V/m; Power Drift = 0.17 dB

Peak SAR (extrapolated) = 0.2520

SAR(1 g) = 0.141 mW/g; SAR(10 g) = 0.078 mW/g

Maximum value of SAR (measured) = 0.158 mW/g

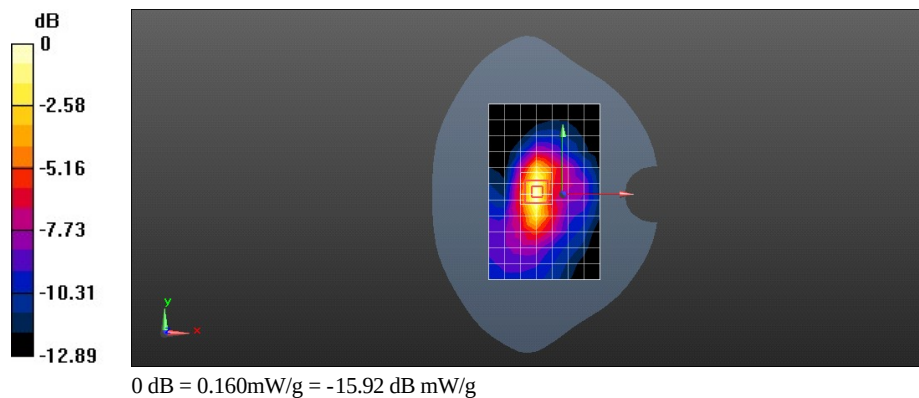

Test Laboratory: HUAWEI SAR Lab

U9500 GSM850 EGPRS 1TS 190CH Towards Ground 10mm

DUT: U9500; Type: HSPA+/HSUPA/HSDPA/UMTS/GSM/GPRS/EDGE Mobile Phone with Bluetooth; Serial: SAR2

Communication System: HW-GSM\GPRS\EGPRS-1TS; Frequency: 836.6 MHz

Medium parameters used: $f = 837$ MHz; $\sigma = 0.989$ mho/m; $\epsilon_r = 53.725$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3736; ConvF(9.11, 9.11, 9.11); Calibrated: 11/23/2011
- Sensor-Surface: 4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE4 Sn852; Calibrated: 11/16/2011
- Phantom: SAM4; Type: SAM; Serial: TP-1620
- DASY52 52.8.0(692); SEMCAD X 14.6.4(4989)

Configuration/Body/Area Scan (8x12x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 0.580 mW/g


Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 23.485 V/m; Power Drift = -0.02 dB

Peak SAR (extrapolated) = 0.7280

SAR(1 g) = 0.555 mW/g; SAR(10 g) = 0.411 mW/g

Maximum value of SAR (measured) = 0.584 mW/g

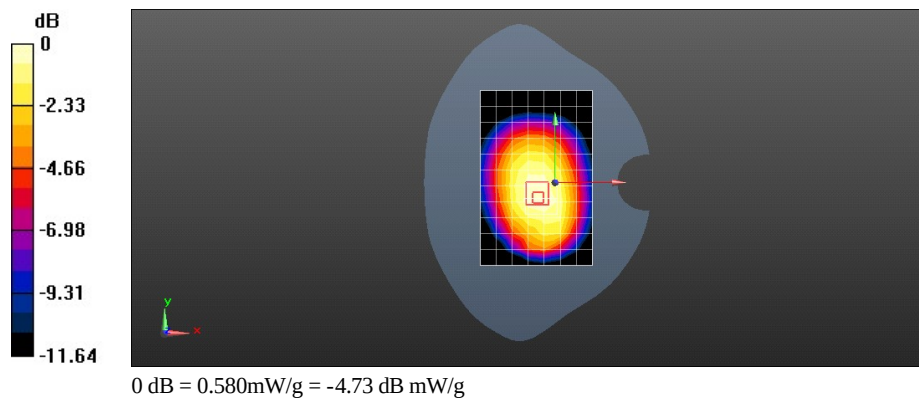

Test Laboratory: HUAWEI SAR Lab

U9500 GSM850 EGPRS 2TS 190CH Towards Ground 10mm

DUT: U9500; Type: HSPA+/HSUPA/HSDPA/UMTS/GSM/GPRS/EDGE Mobile Phone with Bluetooth; Serial: SAR2

Communication System: HW-GSM\GPRS\EGPRS-3TS; Frequency: 836.6 MHz

Medium parameters used: $f = 837$ MHz; $\sigma = 0.989$ mho/m; $\epsilon_r = 53.725$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3736; ConvF(9.11, 9.11, 9.11); Calibrated: 11/23/2011
- Sensor-Surface: 4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE4 Sn852; Calibrated: 11/16/2011
- Phantom: SAM4; Type: SAM; Serial: TP-1620
- DASY52 52.8.0(692); SEMCAD X 14.6.4(4989)

Configuration/Body/Area Scan (8x12x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 0.707 mW/g


Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 25.850 V/m; Power Drift = 0.0098 dB

Peak SAR (extrapolated) = 0.8940

SAR(1 g) = 0.679 mW/g; SAR(10 g) = 0.505 mW/g

Maximum value of SAR (measured) = 0.715 mW/g

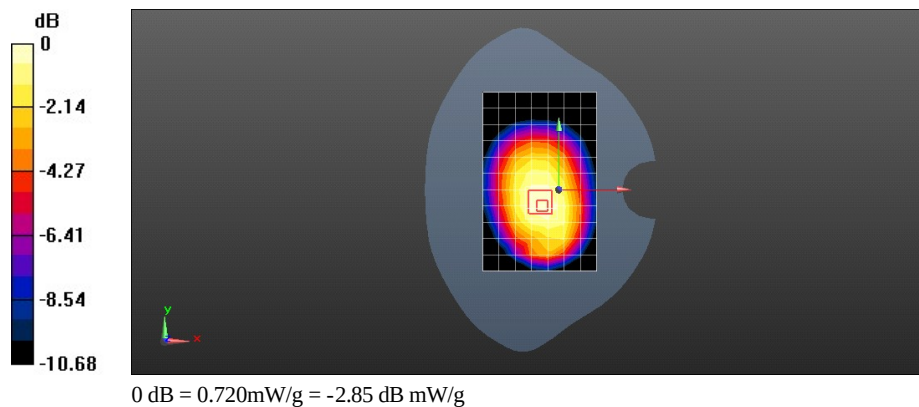

Test Laboratory: HUAWEI SAR Lab

U9500 GSM850 190CH Towards Ground 10mm with Headset

DUT: U9500; Type: HSPA+/HSUPA/HSDPA/UMTS/GSM/GPRS/EDGE Mobile Phone with Bluetooth; Serial: SAR2

Communication System: HW-GSM\GPRS\EGPRS-1TS; Frequency: 836.6 MHz

Medium parameters used: $f = 837$ MHz; $\sigma = 0.989$ mho/m; $\epsilon_r = 53.725$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3736; ConvF(9.11, 9.11, 9.11); Calibrated: 11/23/2011
- Sensor-Surface: 4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE4 Sn852; Calibrated: 11/16/2011
- Phantom: SAM4; Type: SAM; Serial: TP-1620
- DASY52 52.8.0(692); SEMCAD X 14.6.4(4989)

Configuration/Body/Area Scan (8x12x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 0.476 mW/g


Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 19.988 V/m; Power Drift = 0.12 dB

Peak SAR (extrapolated) = 0.6280

SAR(1 g) = 0.457 mW/g; SAR(10 g) = 0.329 mW/g

Maximum value of SAR (measured) = 0.484 mW/g

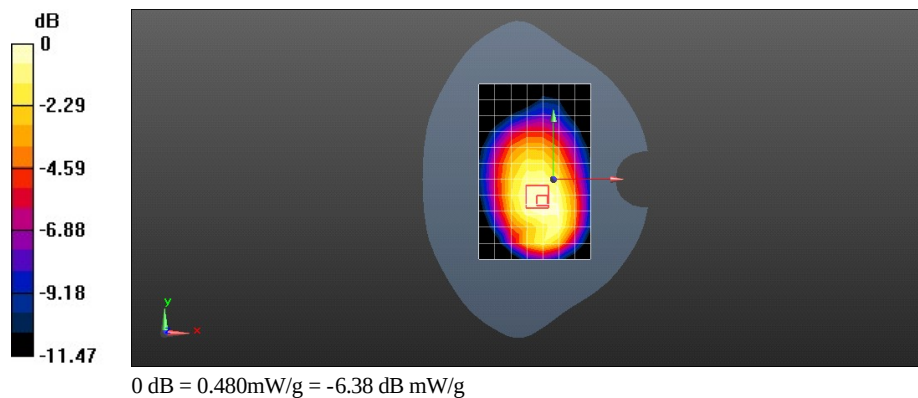

Test Laboratory: HUAWEI SAR Lab

U9500 GSM1900 661CH Left hand touch cheek**DUT: U9500; Type: HSPA+/HSUPA/HSDPA/UMTS/GSM/GPRS/EDGE Mobile Phone with Bluetooth; Serial: SAR2**

Communication System: HW-GSM\GPRS\EGPRS-1TS; Frequency: 1880 MHz

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.389$ mho/m; $\epsilon_r = 38.882$; $\rho = 1000$ kg/m³

Phantom section: Left Section

DASY Configuration:

- Probe: EX3DV4 - SN3736; ConvF(7.69, 7.69, 7.69); Calibrated: 11/23/2011
- Sensor-Surface: 4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE4 Sn852; Calibrated: 11/16/2011
- Phantom: SAM3; Type: SAM; Serial: TP-1597
- DASY52 52.8.0(692); SEMCAD X 14.6.4(4989)

Configuration/Head/Area Scan (8x12x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 0.211 mW/g



Configuration/Head/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 6.070 V/m; Power Drift = 0.14 dB

Peak SAR (extrapolated) = 0.3530

SAR(1 g) = 0.216 mW/g; SAR(10 g) = 0.133 mW/g

Maximum value of SAR (measured) = 0.234 mW/g

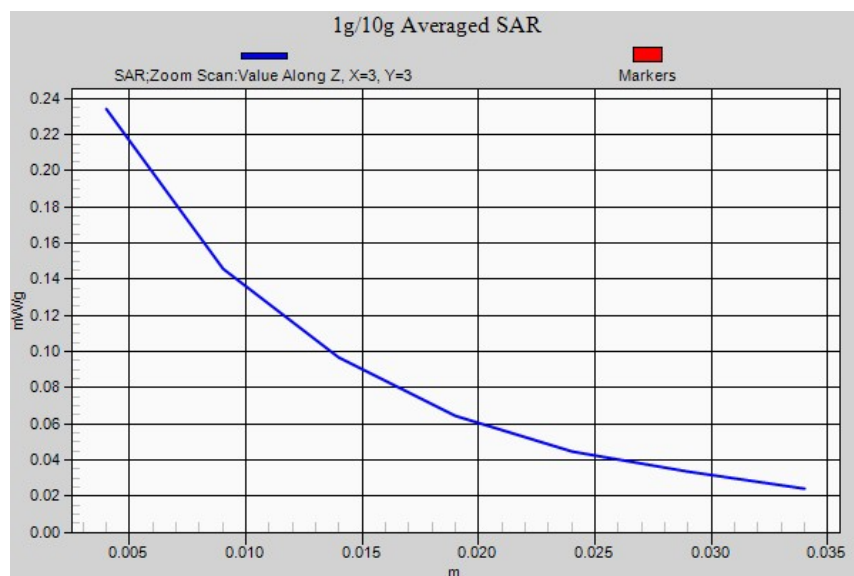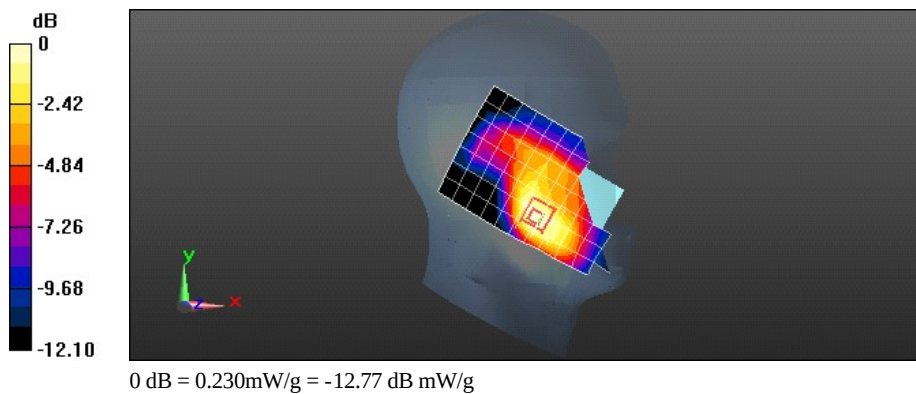

Test Laboratory: HUAWEI SAR Lab

U9500 GSM1900 661CH Left hand tilt 15 degree

DUT: U9500; Type: HSPA+/HSUPA/HSDPA/UMTS/GSM/GPRS/EDGE Mobile Phone with Bluetooth; Serial: SAR2

Communication System: HW-GSM\GPRS\EGPRS-1TS; Frequency: 1880 MHz

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.389$ mho/m; $\epsilon_r = 38.882$; $\rho = 1000$ kg/m³

Phantom section: Left Section

DASY Configuration:

- Probe: EX3DV4 - SN3736; ConvF(7.69, 7.69, 7.69); Calibrated: 11/23/2011
- Sensor-Surface: 4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE4 Sn852; Calibrated: 11/16/2011
- Phantom: SAM3; Type: SAM; Serial: TP-1597
- DASY52 52.8.0(692); SEMCAD X 14.6.4(4989)

Configuration/Head/Area Scan (8x12x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 0.092 mW/g


Configuration/Head/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 7.950 V/m; Power Drift = 0.16 dB

Peak SAR (extrapolated) = 0.1460

SAR(1 g) = 0.088 mW/g; SAR(10 g) = 0.055 mW/g

Maximum value of SAR (measured) = 0.095 mW/g

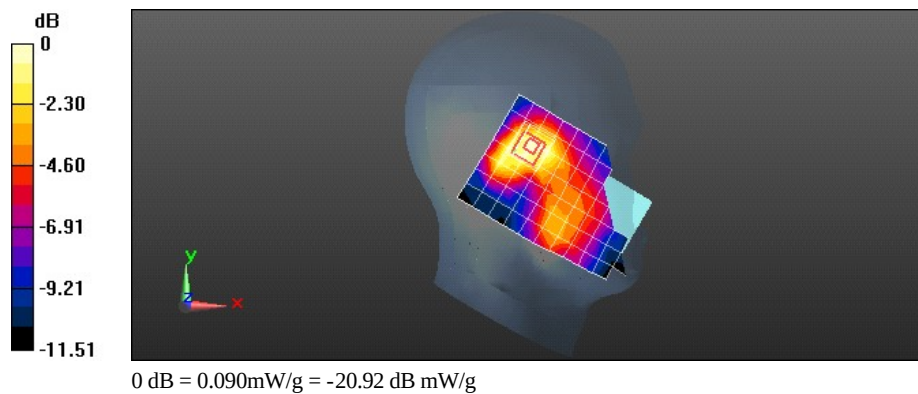

Test Laboratory: HUAWEI SAR Lab

U9500 GSM1900 661CH Right hand touch cheek

DUT: U9500; Type: HSPA+/HSDPA/UMTS/GSM/GPRS/EDGE Mobile Phone with Bluetooth; Serial: SAR2

Communication System: HW-GSM\GPRS\EGPRS-1TS; Frequency: 1880 MHz

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.389$ mho/m; $\epsilon_r = 38.882$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY Configuration:

- Probe: EX3DV4 - SN3736; ConvF(7.69, 7.69, 7.69); Calibrated: 11/23/2011
- Sensor-Surface: 4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE4 Sn852; Calibrated: 11/16/2011
- Phantom: SAM3; Type: SAM; Serial: TP-1597
- DASY52 52.8.0(692); SEMCAD X 14.6.4(4989)

Configuration/Head/Area Scan (8x12x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 0.212 mW/g


Configuration/Head/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 6.210 V/m; Power Drift = 0.10 dB

Peak SAR (extrapolated) = 0.3350

SAR(1 g) = 0.214 mW/g; SAR(10 g) = 0.131 mW/g

Maximum value of SAR (measured) = 0.233 mW/g

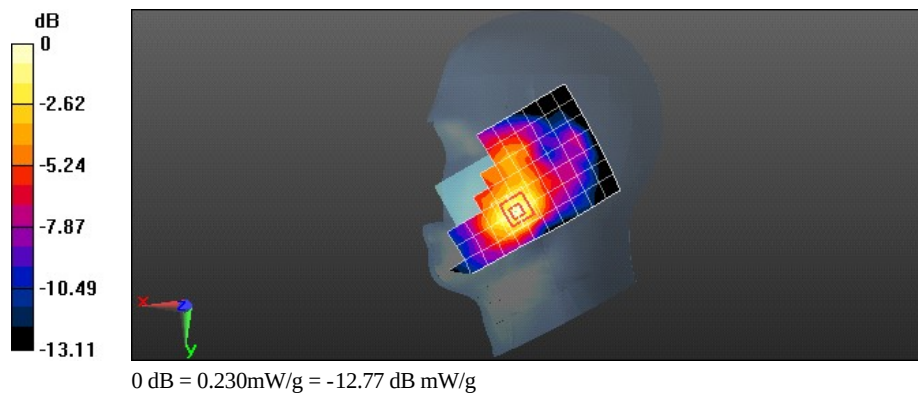

Test Laboratory: HUAWEI SAR Lab

U9500 GSM1900 661CH Right hand tilt 15 degree

DUT: U9500; Type: HSPA+/HSDPA/UMTS/GSM/GPRS/EDGE Mobile Phone with Bluetooth; Serial: SAR2

Communication System: HW-GSM\GPRS\EGPRS-1TS; Frequency: 1880 MHz

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.389$ mho/m; $\epsilon_r = 38.882$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY Configuration:

- Probe: EX3DV4 - SN3736; ConvF(7.69, 7.69, 7.69); Calibrated: 11/23/2011
- Sensor-Surface: 4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE4 Sn852; Calibrated: 11/16/2011
- Phantom: SAM3; Type: SAM; Serial: TP-1597
- DASY52 52.8.0(692); SEMCAD X 14.6.4(4989)

Configuration/Head/Area Scan (8x12x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 0.065 mW/g


Configuration/Head/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 7.670 V/m; Power Drift = -0.03 dB

Peak SAR (extrapolated) = 0.1250

SAR(1 g) = 0.072 mW/g; SAR(10 g) = 0.039 mW/g

Maximum value of SAR (measured) = 0.081 mW/g

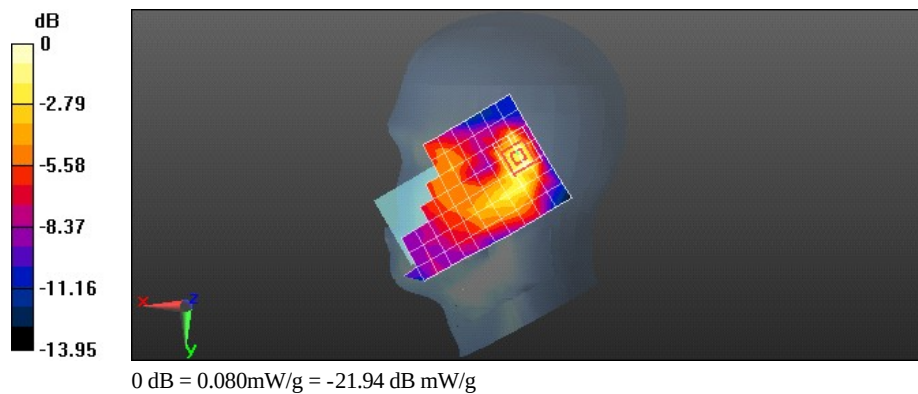

Test Laboratory: HUAWEI SAR Lab

U9500 GSM1900 GPRS 1TS 661CH Towards Phantom 10mm

DUT: U9500; Type: HSPA+/HSUPA/HSDPA/UMTS/GSM/GPRS/EDGE Mobile Phone with Bluetooth; Serial: SAR2

Communication System: HW-GSM\GPRS\EGPRS-1TS; Frequency: 1880 MHz

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.507$ mho/m; $\epsilon_r = 52.545$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3736; ConvF(7.26, 7.26, 7.26); Calibrated: 11/23/2011
- Sensor-Surface: 4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE4 Sn852; Calibrated: 11/16/2011
- Phantom: SAM4; Type: SAM; Serial: TP-1620
- DASY52 52.8.0(692); SEMCAD X 14.6.4(4989)

Configuration/Body/Area Scan (8x12x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 0.293 mW/g


Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 6.192 V/m; Power Drift = -0.02 dB

Peak SAR (extrapolated) = 0.5030

SAR(1 g) = 0.292 mW/g; SAR(10 g) = 0.173 mW/g

Maximum value of SAR (measured) = 0.320 mW/g

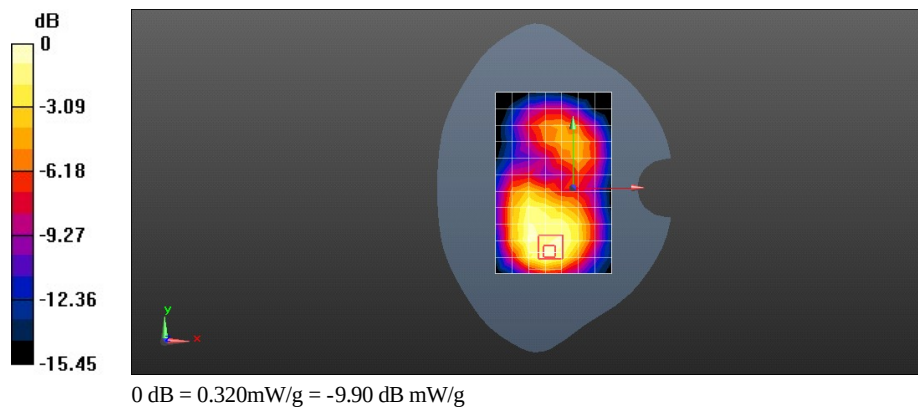

Test Laboratory: HUAWEI SAR Lab

U9500 GSM1900 GPRS 2TS 661CH Towards Phantom 10mm

DUT: U9500; Type: HSPA+/HSUPA/HSDPA/UMTS/GSM/GPRS/EDGE Mobile Phone with Bluetooth; Serial: SAR2

Communication System: HW-GSM\GPRS\EGPRS-2TS; Frequency: 1880 MHz

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.507$ mho/m; $\epsilon_r = 52.545$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3736; ConvF(7.26, 7.26, 7.26); Calibrated: 11/23/2011
- Sensor-Surface: 4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE4 Sn852; Calibrated: 11/16/2011
- Phantom: SAM4; Type: SAM; Serial: TP-1620
- DASY52 52.8.0(692); SEMCAD X 14.6.4(4989)

Configuration/Body/Area Scan (8x12x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 0.393 mW/g


Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 6.983 V/m; Power Drift = 0.0031 dB

Peak SAR (extrapolated) = 0.6430

SAR(1 g) = 0.380 mW/g; SAR(10 g) = 0.224 mW/g

Maximum value of SAR (measured) = 0.419 mW/g

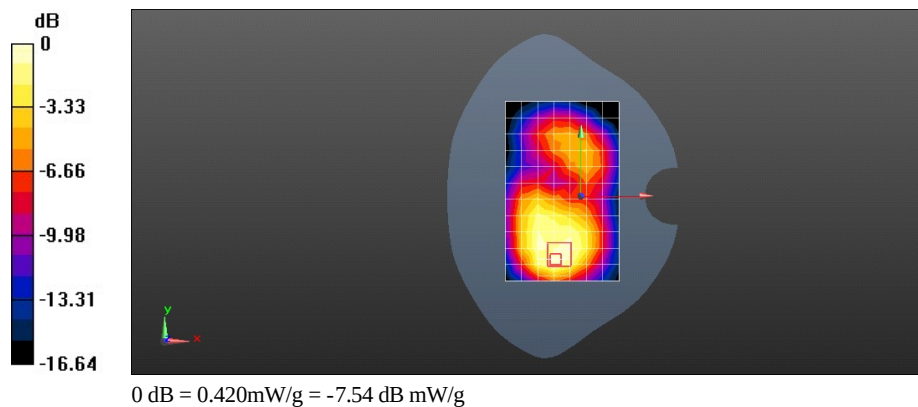

Test Laboratory: HUAWEI SAR Lab

U9500 GSM1900 GPRS 2TS 661CH Towards Ground 10mm

DUT: U9500; Type: HSPA+/HSUPA/HSDPA/UMTS/GSM/GPRS/EDGE Mobile Phone with Bluetooth; Serial: SAR2

Communication System: HW-GSM\GPRS\EGPRS-2TS; Frequency: 1880 MHz

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.507$ mho/m; $\epsilon_r = 52.545$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3736; ConvF(7.26, 7.26, 7.26); Calibrated: 11/23/2011
- Sensor-Surface: 4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE4 Sn852; Calibrated: 11/16/2011
- Phantom: SAM4; Type: SAM; Serial: TP-1620
- DASY52 52.8.0(692); SEMCAD X 14.6.4(4989)

Configuration/Body/Area Scan (8x12x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 0.437 mW/g


Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 8.001 V/m; Power Drift = 0.05 dB

Peak SAR (extrapolated) = 0.7580

SAR(1 g) = 0.452 mW/g; SAR(10 g) = 0.257 mW/g

Maximum value of SAR (measured) = 0.499 mW/g

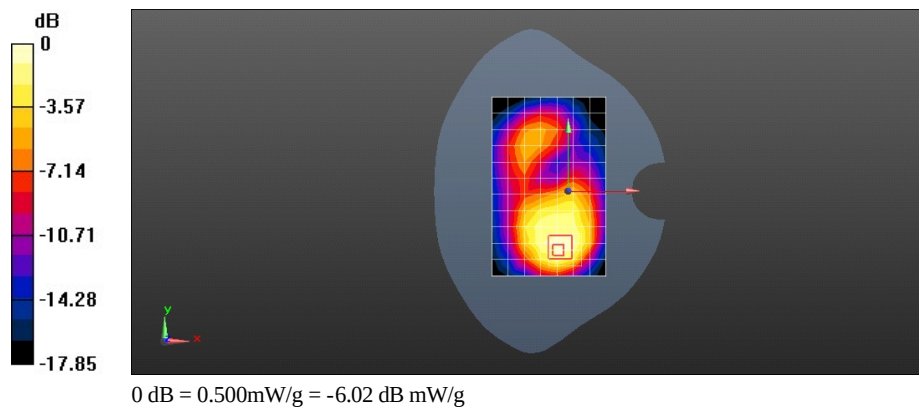

Test Laboratory: HUAWEI SAR Lab

U9500 GSM1900 GPRS 2TS 661CH Left edge 10mm

DUT: U9500; Type: HSPA+/HSUPA/HSDPA/UMTS/GSM/GPRS/EDGE Mobile Phone with Bluetooth; Serial: SAR2

Communication System: HW-GSM\GPRS\EGPRS-2TS; Frequency: 1880 MHz

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.507$ mho/m; $\epsilon_r = 52.545$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3736; ConvF(7.26, 7.26, 7.26); Calibrated: 11/23/2011
- Sensor-Surface: 4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE4 Sn852; Calibrated: 11/16/2011
- Phantom: SAM4; Type: SAM; Serial: TP-1620
- DASY52 52.8.0(692); SEMCAD X 14.6.4(4989)

Configuration/Body/Area Scan (8x12x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 0.203 mW/g


Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 9.618 V/m; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 0.4030

SAR(1 g) = 0.223 mW/g; SAR(10 g) = 0.126 mW/g

Maximum value of SAR (measured) = 0.245 mW/g

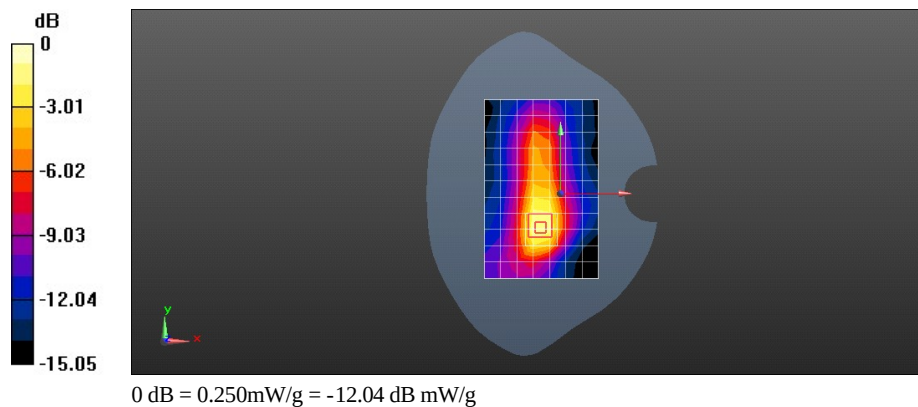

Test Laboratory: HUAWEI SAR Lab

U9500 GSM1900 GPRS 2TS 661CH Right edge 10mm

DUT: U9500; Type: HSPA+/HSUPA/HSDPA/UMTS/GSM/GPRS/EDGE Mobile Phone with Bluetooth; Serial: SAR2

Communication System: HW-GSM\GPRS\EGPRS-2TS; Frequency: 1880 MHz

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.507$ mho/m; $\epsilon_r = 52.545$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3736; ConvF(7.26, 7.26, 7.26); Calibrated: 11/23/2011
- Sensor-Surface: 4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE4 Sn852; Calibrated: 11/16/2011
- Phantom: SAM4; Type: SAM; Serial: TP-1620
- DASY52 52.8.0(692); SEMCAD X 14.6.4(4989)

Configuration/Body/Area Scan (8x12x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 0.099 mW/g

Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 5.216 V/m; Power Drift = 0.03 dB

Peak SAR (extrapolated) = 0.2940

SAR(1 g) = 0.095 mW/g; SAR(10 g) = 0.051 mW/g


Maximum value of SAR (measured) = 0.103 mW/g

Configuration/Body/Zoom Scan (7x7x7)/Cube 1: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 5.216 V/m; Power Drift = 0.03 dB

Peak SAR (extrapolated) = 0.1580

SAR(1 g) = 0.095 mW/g; SAR(10 g) = 0.054 mW/g

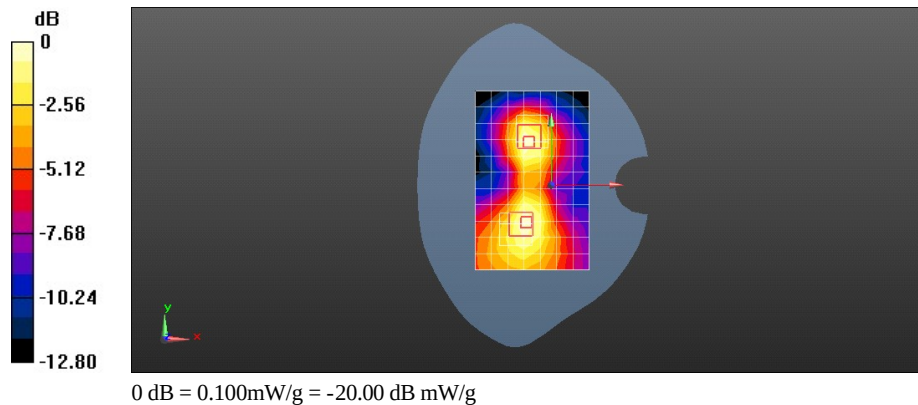

Test Laboratory: HUAWEI SAR Lab

U9500 GSM1900 GPRS 2TS 661CH Bottom edge 10mm

DUT: U9500; Type: HSPA+/HSUPA/HSDPA/UMTS/GSM/GPRS/EDGE Mobile Phone with Bluetooth; Serial: SAR2

Communication System: HW-GSM\GPRS\EGPRS-2TS; Frequency: 1880 MHz

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.507$ mho/m; $\epsilon_r = 52.545$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3736; ConvF(7.26, 7.26, 7.26); Calibrated: 11/23/2011
- Sensor-Surface: 4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE4 Sn852; Calibrated: 11/16/2011
- Phantom: SAM4; Type: SAM; Serial: TP-1620
- DASY52 52.8.0(692); SEMCAD X 14.6.4(4989)

Configuration/Body/Area Scan (8x12x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 0.701 mW/g


Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 20.445 V/m; Power Drift = -0.11 dB

Peak SAR (extrapolated) = 1.1830

SAR(1 g) = 0.654 mW/g; SAR(10 g) = 0.339 mW/g

Maximum value of SAR (measured) = 0.739 mW/g

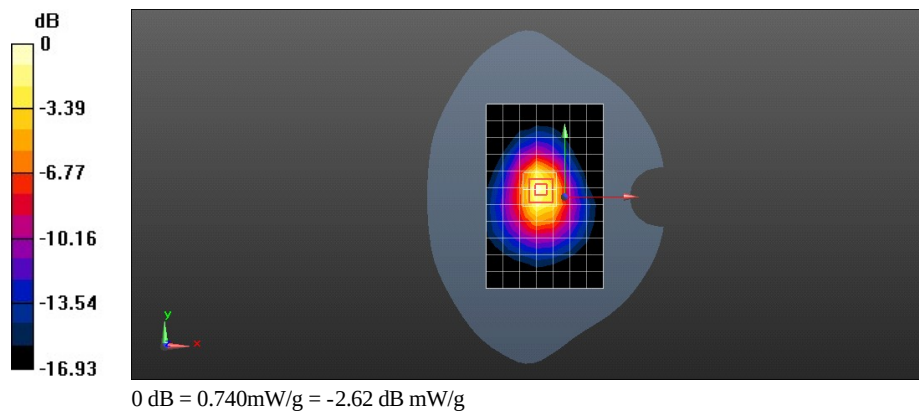

Test Laboratory: HUAWEI SAR Lab

U9500 GSM1900 EGPRS 1TS 661CH Bottom edge 10mm

DUT: U9500; Type: HSPA+/HSUPA/HSDPA/UMTS/GSM/GPRS/EDGE Mobile Phone with Bluetooth; Serial: SAR2

Communication System: HW-GSM\GPRS\EGPRS-1TS; Frequency: 1880 MHz

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.507$ mho/m; $\epsilon_r = 52.545$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3736; ConvF(7.26, 7.26, 7.26); Calibrated: 11/23/2011
- Sensor-Surface: 4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE4 Sn852; Calibrated: 11/16/2011
- Phantom: SAM4; Type: SAM; Serial: TP-1620
- DASY52 52.8.0(692); SEMCAD X 14.6.4(4989)

Configuration/Body/Area Scan (8x12x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 0.625 mW/g


Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 17.962 V/m; Power Drift = -0.09 dB

Peak SAR (extrapolated) = 1.0400

SAR(1 g) = 0.564 mW/g; SAR(10 g) = 0.290 mW/g

Maximum value of SAR (measured) = 0.635 mW/g

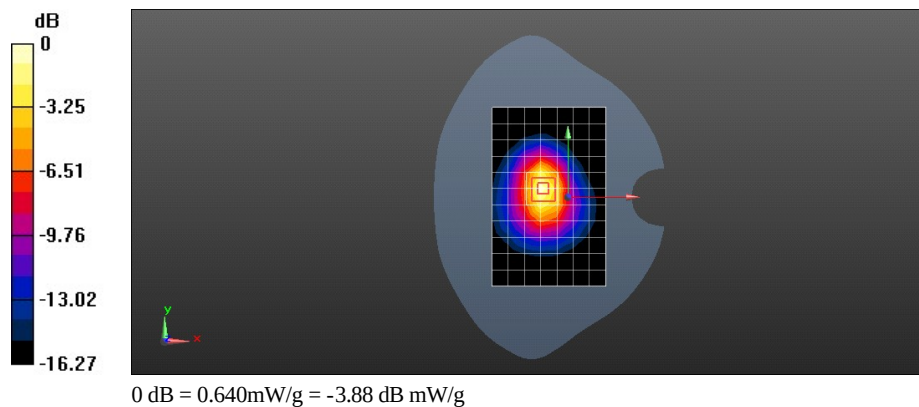

Test Laboratory: HUAWEI SAR Lab

U9500 GSM1900 EGPRS 2TS 661CH Bottom edge 10mm**DUT: U9500; Type: HSPA+/HSUPA/HSDPA/UMTS/GSM/GPRS/EDGE Mobile Phone with Bluetooth; Serial: SAR2**

Communication System: HW-GSM\GPRS\EGPRS-2TS; Frequency: 1880 MHz

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.507$ mho/m; $\epsilon_r = 52.545$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3736; ConvF(7.26, 7.26, 7.26); Calibrated: 11/23/2011
- Sensor-Surface: 4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE4 Sn852; Calibrated: 11/16/2011
- Phantom: SAM4; Type: SAM; Serial: TP-1620
- DASY52 52.8.0(692); SEMCAD X 14.6.4(4989)

Configuration/Body/Area Scan (8x12x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 0.787 mW/g



Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 19.840 V/m; Power Drift = 0.04 dB

Peak SAR (extrapolated) = 1.2700

SAR(1 g) = 0.713 mW/g; SAR(10 g) = 0.368 mW/g

Maximum value of SAR (measured) = 0.806 mW/g

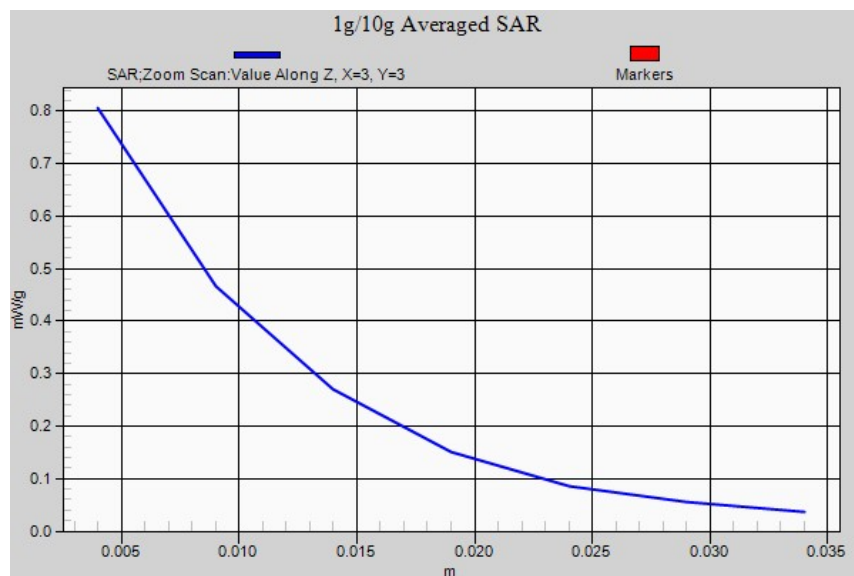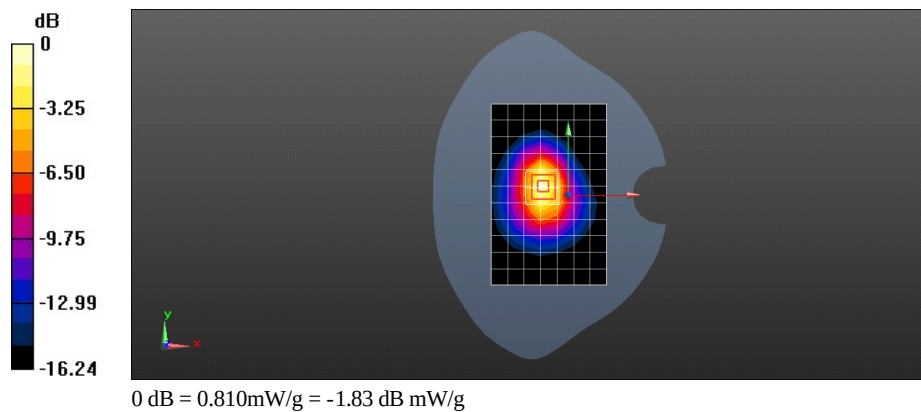

Test Laboratory: HUAWEI SAR Lab

U9500 GSM1900 661CH Towards Ground 10mm with Headset

DUT: U9500; Type: HSPA+/HSUPA/HSDPA/UMTS/GSM/GPRS/EDGE Mobile Phone with Bluetooth; Serial: SAR2

Communication System: HW-GSM\GPRS\EGPRS-1TS; Frequency: 1880 MHz

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.507$ mho/m; $\epsilon_r = 52.545$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3736; ConvF(7.26, 7.26, 7.26); Calibrated: 11/23/2011
- Sensor-Surface: 4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE4 Sn852; Calibrated: 11/16/2011
- Phantom: SAM4; Type: SAM; Serial: TP-1620
- DASY52 52.8.0(692); SEMCAD X 14.6.4(4989)

Configuration/Body/Area Scan (8x12x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 0.340 mW/g


Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 6.669 V/m; Power Drift = 0.18 dB

Peak SAR (extrapolated) = 0.5960

SAR(1 g) = 0.354 mW/g; SAR(10 g) = 0.200 mW/g

Maximum value of SAR (measured) = 0.394 mW/g

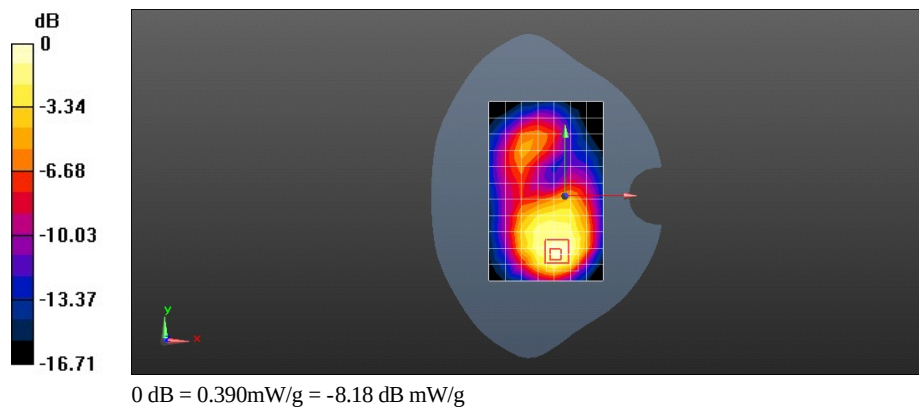

Test Laboratory: HUAWEI SAR Lab

U9500 WCDMA850 4182CH Left hand touch cheek

DUT: U9500; Type: HSPA+/HSUPA/HSDPA/UMTS/GSM/GPRS/EDGE Mobile Phone with Bluetooth; Serial: SAR2

Communication System: HW-UMTS-FDD(WCDMA); Frequency: 836.4 MHz

Medium parameters used (interpolated): $f = 836.4$ MHz; $\sigma = 0.915$ mho/m; $\epsilon_r = 41.072$; $\rho = 1000$ kg/m³

Phantom section: Left Section

DASY Configuration:

- Probe: EX3DV4 - SN3736; ConvF(9.04, 9.04, 9.04); Calibrated: 11/23/2011
- Sensor-Surface: 4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE4 Sn852; Calibrated: 11/16/2011
- Phantom: SAM4; Type: SAM; Serial: TP-1620
- DASY52 52.8.0(692); SEMCAD X 14.6.4(4989)

Configuration/Head/Area Scan (8x12x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.298 mW/g

Configuration/Head/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm


Reference Value = 6.285 V/m; Power Drift = 0.04 dB

Peak SAR (extrapolated) = 0.3680

SAR(1 g) = 0.295 mW/g; SAR(10 g) = 0.225 mW/g

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.309 mW/g

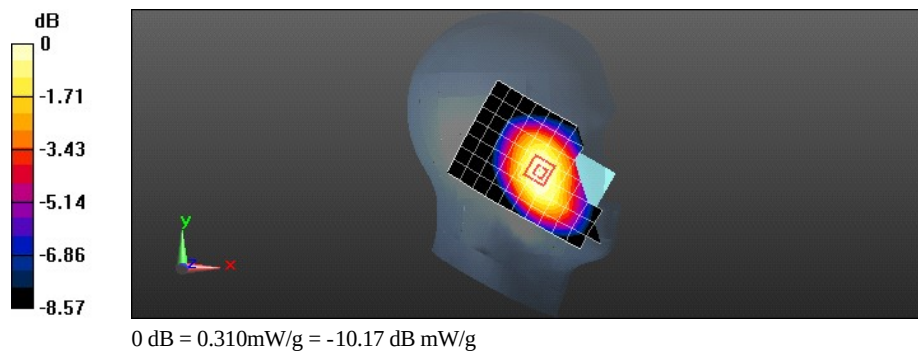

Test Laboratory: HUAWEI SAR Lab

U9500 WCDMA850 4182CH Left hand tilt 15 degree

DUT: U9500; Type: HSPA+/HSUPA/HSDPA/UMTS/GSM/GPRS/EDGE Mobile Phone with Bluetooth; Serial: SAR2

Communication System: HW-UMTS-FDD(WCDMA); Frequency: 836.4 MHz

Medium parameters used (interpolated): $f = 836.4$ MHz; $\sigma = 0.915$ mho/m; $\epsilon_r = 41.072$; $\rho = 1000$ kg/m³

Phantom section: Left Section

DASY Configuration:

- Probe: EX3DV4 - SN3736; ConvF(9.04, 9.04, 9.04); Calibrated: 11/23/2011
- Sensor-Surface: 4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE4 Sn852; Calibrated: 11/16/2011
- Phantom: SAM4; Type: SAM; Serial: TP-1620
- DASY52 52.8.0(692); SEMCAD X 14.6.4(4989)

Configuration/Head/Area Scan (8x12x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.198 mW/g

Configuration/Head/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm


Reference Value = 8.337 V/m; Power Drift = 0.04 dB

Peak SAR (extrapolated) = 0.2410

SAR(1 g) = 0.194 mW/g; SAR(10 g) = 0.149 mW/g

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.203 mW/g

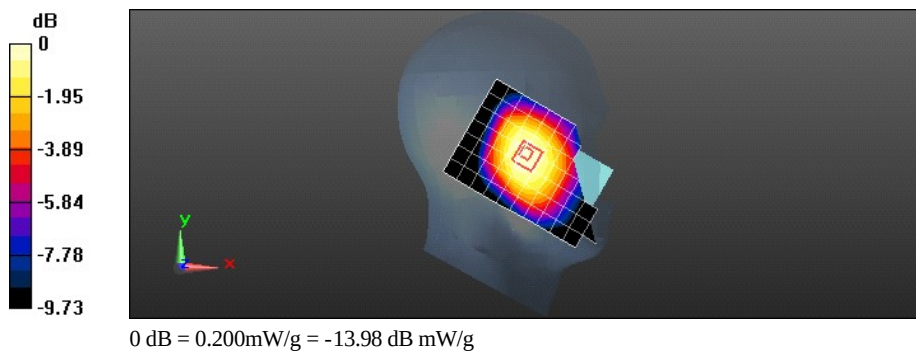

Test Laboratory: HUAWEI SAR Lab

U9500 WCDMA850 4182CH Right hand touch cheek

DUT: U9500; Type: HSPA+/HSUPA/HSDPA/UMTS/GSM/GPRS/EDGE Mobile Phone with Bluetooth; Serial: SAR2

Communication System: HW-UMTS-FDD(WCDMA); Frequency: 836.4 MHz

Medium parameters used (interpolated): $f = 836.4$ MHz; $\sigma = 0.915$ mho/m; $\epsilon_r = 41.072$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY Configuration:

- Probe: EX3DV4 - SN3736; ConvF(9.04, 9.04, 9.04); Calibrated: 11/23/2011
- Sensor-Surface: 4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE4 Sn852; Calibrated: 11/16/2011
- Phantom: SAM4; Type: SAM; Serial: TP-1620
- DASY52 52.8.0(692); SEMCAD X 14.6.4(4989)

Configuration/Head/Area Scan (8x12x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.360 mW/g

Configuration/Head/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm



Reference Value = 7.515 V/m; Power Drift = 0.07 dB

Peak SAR (extrapolated) = 0.4350

SAR(1 g) = 0.352 mW/g; SAR(10 g) = 0.271 mW/g

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.370 mW/g

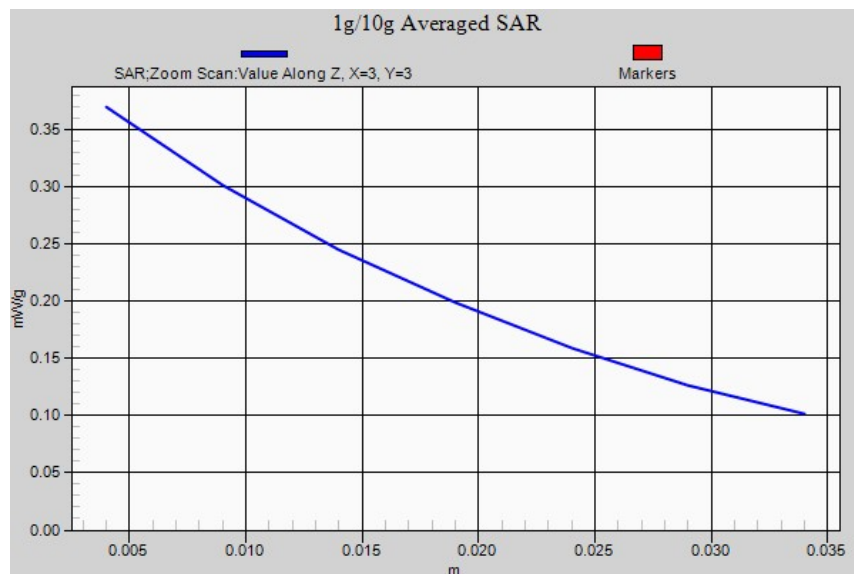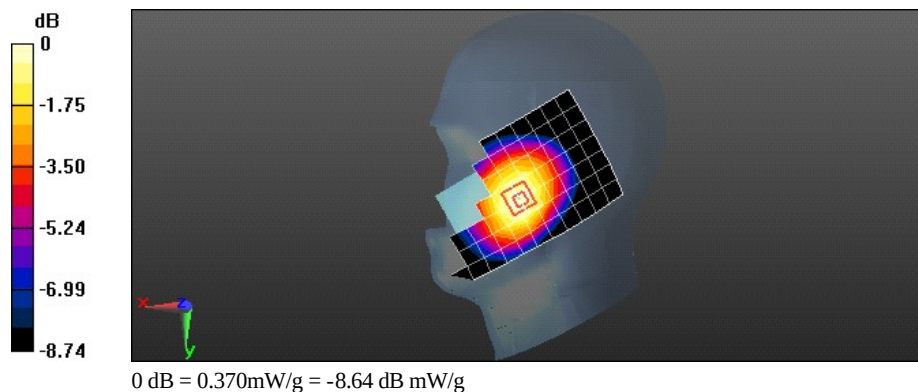

Test Laboratory: HUAWEI SAR Lab

U9500 WCDMA850 4182CH Right hand tilt 15 degree

DUT: U9500; Type: HSPA+/HSUPA/HSDPA/UMTS/GSM/GPRS/EDGE Mobile Phone with Bluetooth; Serial: SAR2

Communication System: HW-UMTS-FDD(WCDMA); Frequency: 836.4 MHz

Medium parameters used (interpolated): $f = 836.4$ MHz; $\sigma = 0.915$ mho/m; $\epsilon_r = 41.072$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY Configuration:

- Probe: EX3DV4 - SN3736; ConvF(9.04, 9.04, 9.04); Calibrated: 11/23/2011
- Sensor-Surface: 4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE4 Sn852; Calibrated: 11/16/2011
- Phantom: SAM4; Type: SAM; Serial: TP-1620
- DASY52 52.8.0(692); SEMCAD X 14.6.4(4989)

Configuration/Head/Area Scan (8x12x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.242 mW/g

Configuration/Head/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm


Reference Value = 11.785 V/m; Power Drift = 0.07 dB

Peak SAR (extrapolated) = 0.2930

SAR(1 g) = 0.234 mW/g; SAR(10 g) = 0.179 mW/g

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.244 mW/g

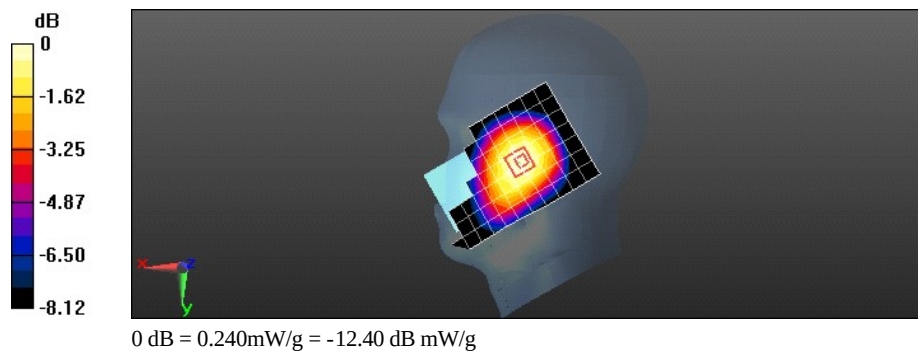

Test Laboratory: HUAWEI SAR Lab

U9500 WCDMA850 4182CH Towards Phantom 10mm

DUT: U9500; Type: HSPA+/HSUPA/HSDPA/UMTS/GSM/GPRS/EDGE Mobile Phone with Bluetooth; Serial: SAR2

Communication System: HW-UMTS-FDD(WCDMA); Frequency: 836.4 MHz

Medium parameters used (interpolated): $f = 836.4$ MHz; $\sigma = 0.988$ mho/m; $\epsilon_r = 53.702$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3736; ConvF(9.11, 9.11, 9.11); Calibrated: 11/23/2011
- Sensor-Surface: 4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE4 Sn852; Calibrated: 11/16/2011
- Phantom: SAM4; Type: SAM; Serial: TP-1620
- DASY52 52.8.0(692); SEMCAD X 14.6.4(4989)

Configuration/Body/Area Scan (8x12x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.487 mW/g

Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm


Reference Value = 21.455 V/m; Power Drift = 0.11 dB

Peak SAR (extrapolated) = 0.6150

SAR(1 g) = 0.469 mW/g; SAR(10 g) = 0.356 mW/g

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.490 mW/g

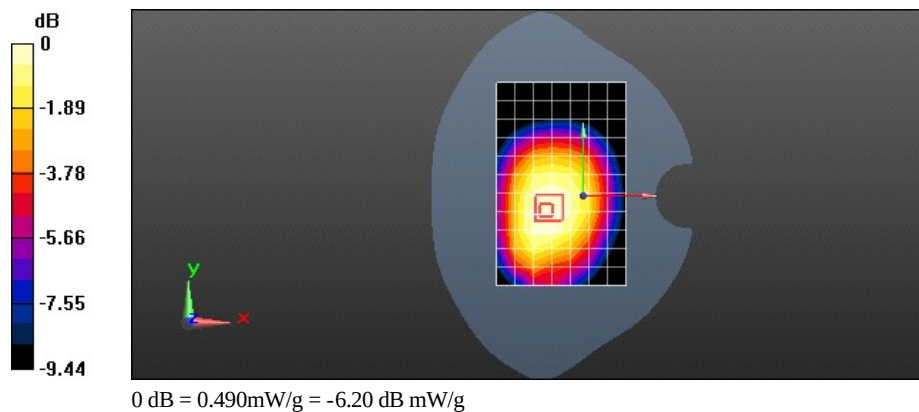

Test Laboratory: HUAWEI SAR Lab

U9500 WCDMA850 4182CH Towards Ground 10mm

DUT: U9500; Type: HSPA+/HSUPA/HSDPA/UMTS/GSM/GPRS/EDGE Mobile Phone with Bluetooth; Serial: SAR2

Communication System: HW-UMTS-FDD(WCDMA); Frequency: 836.4 MHz

Medium parameters used (interpolated): $f = 836.4$ MHz; $\sigma = 0.988$ mho/m; $\epsilon_r = 53.702$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3736; ConvF(9.11, 9.11, 9.11); Calibrated: 11/23/2011
- Sensor-Surface: 4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE4 Sn852; Calibrated: 11/16/2011
- Phantom: SAM4; Type: SAM; Serial: TP-1620
- DASY52 52.8.0(692); SEMCAD X 14.6.4(4989)

Configuration/Body/Area Scan (8x12x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.649 mW/g

Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm



Reference Value = 24.460 V/m; Power Drift = 0.04 dB

Peak SAR (extrapolated) = 0.8470

SAR(1 g) = 0.646 mW/g; SAR(10 g) = 0.475 mW/g

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.681 mW/g

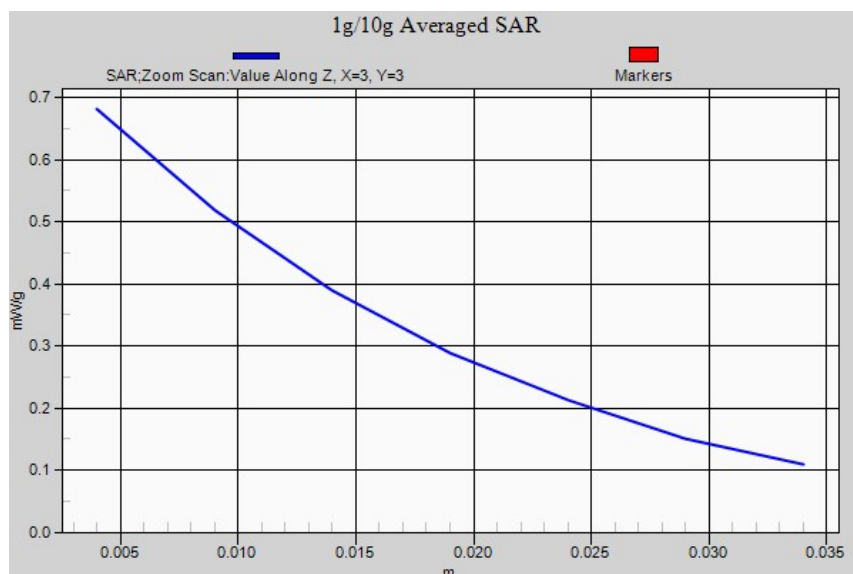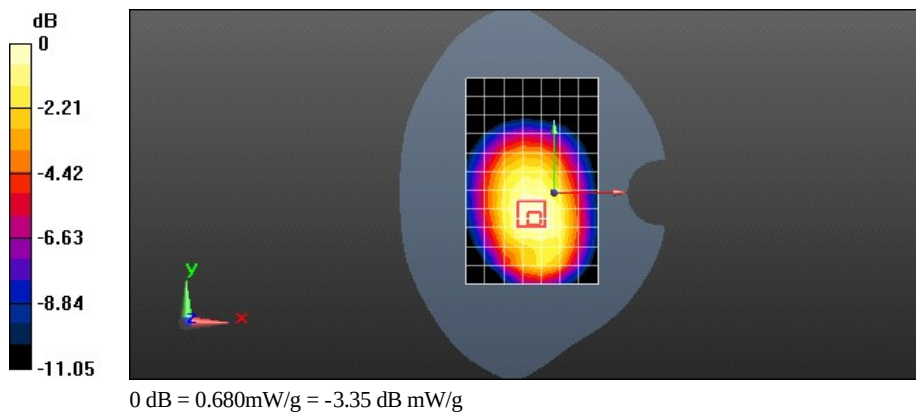

Test Laboratory: HUAWEI SAR Lab

U9500 WCDMA850 4182CH Left edge 10mm

DUT: U9500; Type: HSPA+/HSUPA/HSDPA/UMTS/GSM/GPRS/EDGE Mobile Phone with Bluetooth; Serial: SAR2

Communication System: HW-UMTS-FDD(WCDMA); Frequency: 836.4 MHz

Medium parameters used (interpolated): $f = 836.4$ MHz; $\sigma = 0.988$ mho/m; $\epsilon_r = 53.702$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3736; ConvF(9.11, 9.11, 9.11); Calibrated: 11/23/2011
- Sensor-Surface: 4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE4 Sn852; Calibrated: 11/16/2011
- Phantom: SAM4; Type: SAM; Serial: TP-1620
- DASY52 52.8.0(692); SEMCAD X 14.6.4(4989)

Configuration/Body/Area Scan (8x12x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.516 mW/g

Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm


Reference Value = 24.003 V/m; Power Drift = -0.01 dB

Peak SAR (extrapolated) = 0.7790

SAR(1 g) = 0.537 mW/g; SAR(10 g) = 0.361 mW/g

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.577 mW/g

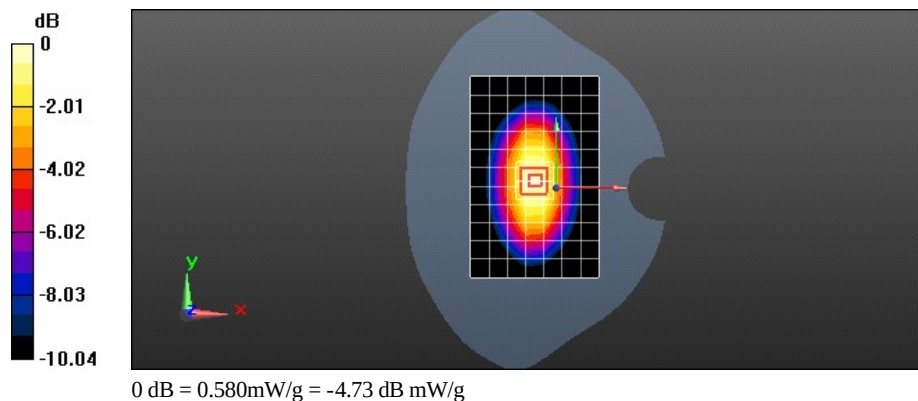

Test Laboratory: HUAWEI SAR Lab

U9500 WCDMA850 4182CH Right edge 10mm

DUT: U9500; Type: HSPA+/HSUPA/HSDPA/UMTS/GSM/GPRS/EDGE Mobile Phone with Bluetooth; Serial: SAR2

Communication System: HW-UMTS-FDD(WCDMA); Frequency: 836.4 MHz

Medium parameters used (interpolated): $f = 836.4$ MHz; $\sigma = 0.988$ mho/m; $\epsilon_r = 53.702$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3736; ConvF(9.11, 9.11, 9.11); Calibrated: 11/23/2011
- Sensor-Surface: 4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE4 Sn852; Calibrated: 11/16/2011
- Phantom: SAM4; Type: SAM; Serial: TP-1620
- DASY52 52.8.0(692); SEMCAD X 14.6.4(4989)

Configuration/Body/Area Scan (8x12x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.627 mW/g

Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm


Reference Value = 25.599 V/m; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 0.8870

SAR(1 g) = 0.613 mW/g; SAR(10 g) = 0.414 mW/g

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.657 mW/g

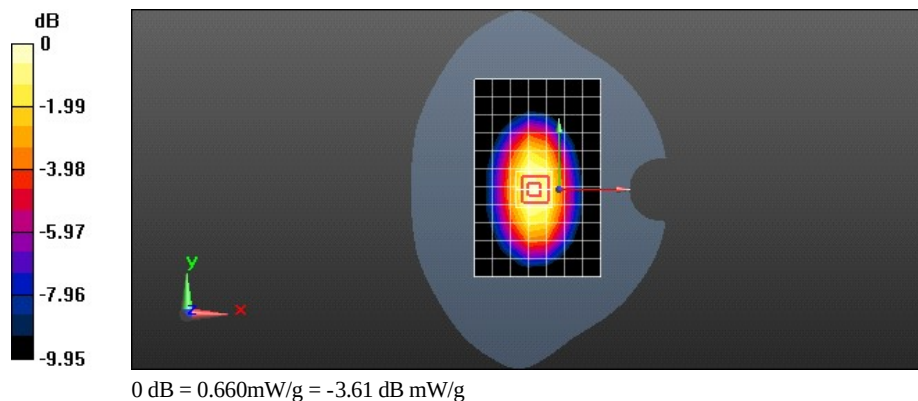

Test Laboratory: HUAWEI SAR Lab

U9500 WCDMA850 4182CH Bottom edge 10mm

DUT: U9500; Type: HSPA+/HSUPA/HSDPA/UMTS/GSM/GPRS/EDGE Mobile Phone with Bluetooth; Serial: SAR2

Communication System: HW-UMTS-FDD(WCDMA); Frequency: 836.4 MHz

Medium parameters used (interpolated): $f = 836.4$ MHz; $\sigma = 0.988$ mho/m; $\epsilon_r = 53.702$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3736; ConvF(9.11, 9.11, 9.11); Calibrated: 11/23/2011
- Sensor-Surface: 4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE4 Sn852; Calibrated: 11/16/2011
- Phantom: SAM4; Type: SAM; Serial: TP-1620
- DASY52 52.8.0(692); SEMCAD X 14.6.4(4989)

Configuration/Body/Area Scan (8x12x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.108 mW/g

Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm


Reference Value = 6.144 V/m; Power Drift = -0.11 dB

Peak SAR (extrapolated) = 0.2170

SAR(1 g) = 0.122 mW/g; SAR(10 g) = 0.069 mW/g

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.132 mW/g

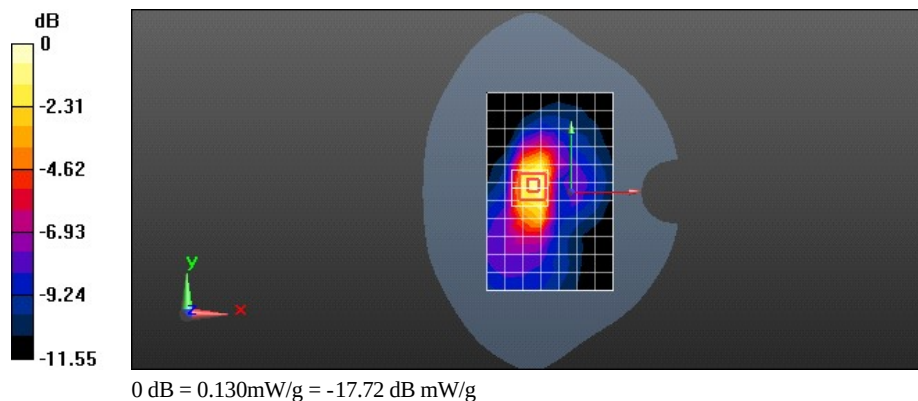

Test Laboratory: HUAWEI SAR Lab

U9500 WCDMA850 4182CH Towards Ground 10mm with HSDPA

DUT: U9500; Type: HSPA+/HSUPA/HSDPA/UMTS/GSM/GPRS/EDGE Mobile Phone with Bluetooth; Serial: SAR2

Communication System: HW-UMTS-FDD(WCDMA); Frequency: 836.4 MHz

Medium parameters used (interpolated): $f = 836.4$ MHz; $\sigma = 0.988$ mho/m; $\epsilon_r = 53.702$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3736; ConvF(9.11, 9.11, 9.11); Calibrated: 11/23/2011
- Sensor-Surface: 4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE4 Sn852; Calibrated: 11/16/2011
- Phantom: SAM4; Type: SAM; Serial: TP-1620
- DASY52 52.8.0(692); SEMCAD X 14.6.4(4989)

Configuration/Body/Area Scan (8x12x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.641 mW/g

Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm


Reference Value = 24.554 V/m; Power Drift = 0.05 dB

Peak SAR (extrapolated) = 0.8090

SAR(1 g) = 0.629 mW/g; SAR(10 g) = 0.470 mW/g

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.662 mW/g

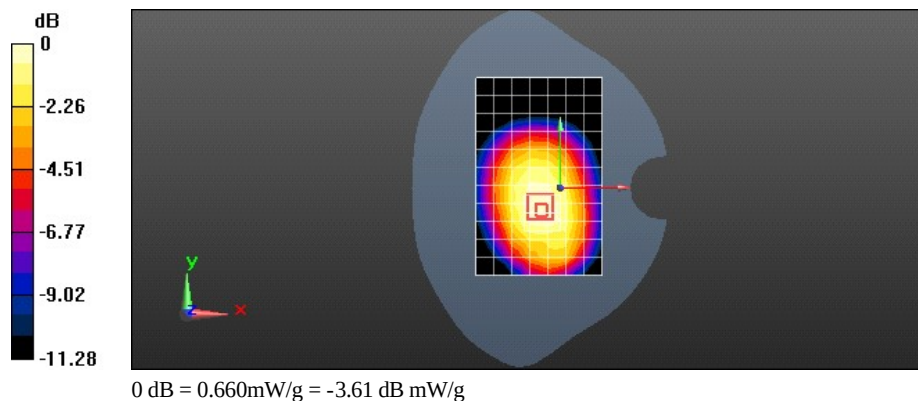

Test Laboratory: HUAWEI SAR Lab

U9500 WCDMA850 4182CH Towards Ground 10mm with HSUPA

DUT: U9500; Type: HSPA+/HSUPA/HSDPA/UMTS/GSM/GPRS/EDGE Mobile Phone with Bluetooth; Serial: SAR2

Communication System: HW-UMTS-FDD(WCDMA); Frequency: 836.4 MHz

Medium parameters used (interpolated): $f = 836.4$ MHz; $\sigma = 0.988$ mho/m; $\epsilon_r = 53.702$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3736; ConvF(9.11, 9.11, 9.11); Calibrated: 11/23/2011
- Sensor-Surface: 4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE4 Sn852; Calibrated: 11/16/2011
- Phantom: SAM4; Type: SAM; Serial: TP-1620
- DASY52 52.8.0(692); SEMCAD X 14.6.4(4989)

Configuration/Body/Area Scan (8x12x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.497 mW/g

Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 21.772 V/m; Power Drift = 0.03 dB

Peak SAR (extrapolated) = 0.6330

SAR(1 g) = 0.491 mW/g; SAR(10 g) = 0.366 mW/g

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.518 mW/g

