



Appendix B. SAR Measurement Plots

Table of contents
GSM 850MHz Head
GSM 850MHz Body
GSM 1900MHz Head
GSM 1900MHz Body
WCDMA 850MHz Head
WCDMA 850MHz Body
WCDMA 1700MHz Head
WCDMA 1700MHz Body
WCDMA 1900MHz Head
WCDMA 1900MHz Body
WiFi(802.11b) 2450MHz Head
WiFi(802.11b) 2450MHz Body

Test Laboratory: HUAWEI SAR Lab

U9510E GSM850 190CH Left hand touch cheek

DUT: U9510E; Type: HSHSPA+/HSUPA/HSDPA/UMTS/GSM/GPRS/EDGE Mobile Phone with Bluetooth; Serial: SAR1

Communication System: HW-GSM\GPRS\EGPRS-1TS; Frequency: 836.6 MHz

Medium parameters used: $f = 837$ MHz; $\sigma = 0.914$ mho/m; $\epsilon_r = 41.429$; $\rho = 1000$ kg/m³

Phantom section: Left Section

DASY Configuration:

- Probe: EX3DV4 - SN3736; ConvF(9.01, 9.01, 9.01); Calibrated: 4/26/2012;
- Sensor-Surface: 4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE4 Sn852; Calibrated: 11/16/2011
- Phantom: SAM4; Type: SAM; Serial: TP-1620
- DASY52 52.8.1(838); SEMCAD X 14.6.5(6469)

Configuration/Head/Area Scan (8x12x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 0.269 mW/g


Configuration/Head/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 7.375 V/m; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 0.322 mW/g

SAR(1 g) = 0.263 mW/g; SAR(10 g) = 0.200 mW/g

Maximum value of SAR (measured) = 0.276 mW/g

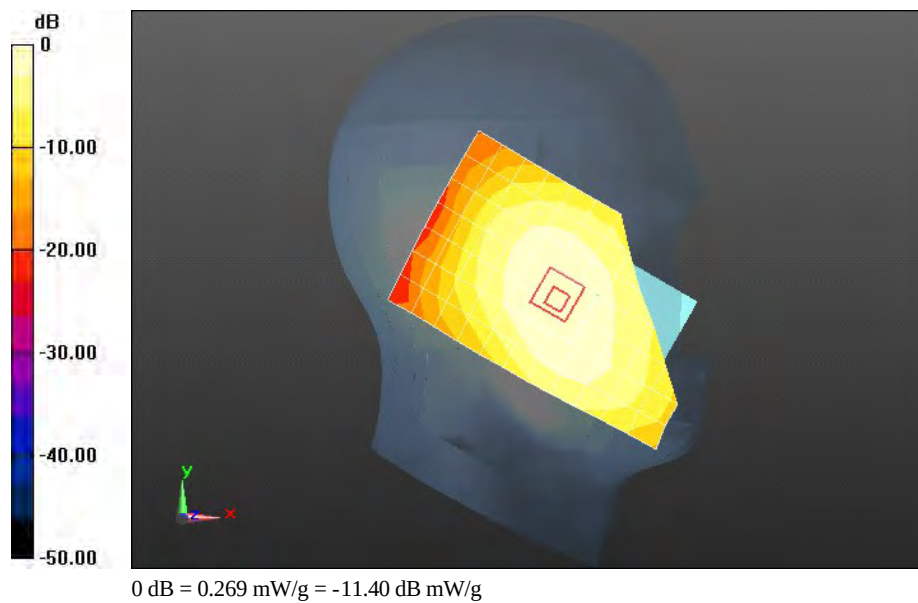

Test Laboratory: HUAWEI SAR Lab

U9510E GSM850 190CH Left hand tilt 15 degree

DUT: U9510E; Type: HSHSPA+/HSUPA/HSDPA/UMTS/GSM/GPRS/EDGE Mobile Phone with Bluetooth; Serial: SAR1

Communication System: HW-GSM\GPRS\EGPRS-1TS; Frequency: 836.6 MHz

Medium parameters used: $f = 837$ MHz; $\sigma = 0.914$ mho/m; $\epsilon_r = 41.429$; $\rho = 1000$ kg/m³

Phantom section: Left Section

DASY Configuration:

- Probe: EX3DV4 - SN3736; ConvF(9.01, 9.01, 9.01); Calibrated: 4/26/2012;
- Sensor-Surface: 4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE4 Sn852; Calibrated: 11/16/2011
- Phantom: SAM4; Type: SAM; Serial: TP-1620
- DASY52 52.8.1(838); SEMCAD X 14.6.5(6469)

Configuration/Head/Area Scan (8x12x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 0.208 mW/g


Configuration/Head/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 11.519 V/m; Power Drift = -0.01 dB

Peak SAR (extrapolated) = 0.253 mW/g

SAR(1 g) = 0.203 mW/g; SAR(10 g) = 0.155 mW/g

Maximum value of SAR (measured) = 0.212 mW/g

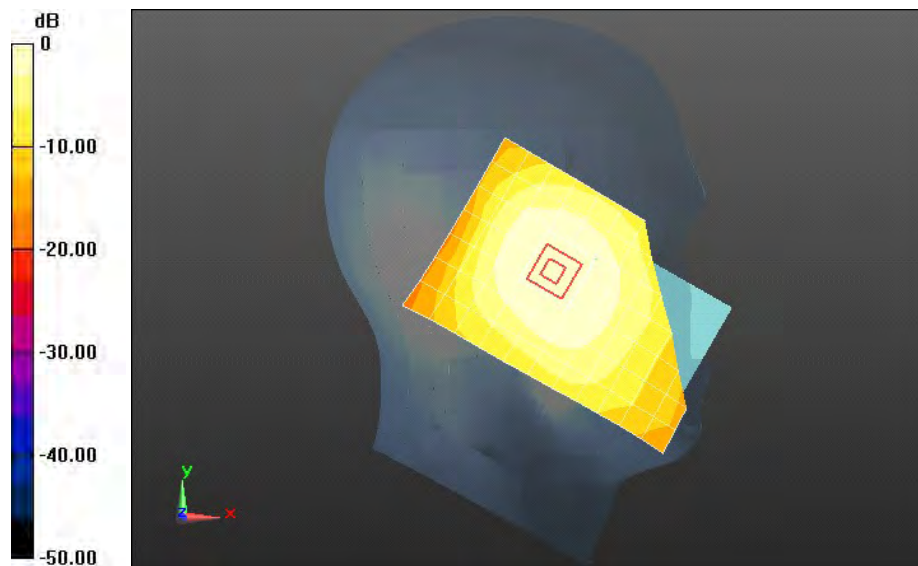

0 dB = 0.208 mW/g = -13.63 dB mW/g

Test Laboratory: HUAWEI SAR Lab

U9510E GSM850 190CH Right hand touch cheek**DUT: U9510E; Type: HSHSPA+/HSUPA/HSDPA/UMTS/GSM/GPRS/EDGE Mobile Phone with Bluetooth; Serial: SAR1**

Communication System: HW-GSM\GPRS\EGPRS-1TS; Frequency: 836.6 MHz

Medium parameters used: $f = 837$ MHz; $\sigma = 0.914$ mho/m; $\epsilon_r = 41.429$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY Configuration:

- Probe: EX3DV4 - SN3736; ConvF(9.01, 9.01, 9.01); Calibrated: 4/26/2012;
- Sensor-Surface: 4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE4 Sn852; Calibrated: 11/16/2011
- Phantom: SAM4; Type: SAM; Serial: TP-1620
- DASY52 52.8.1(838); SEMCAD X 14.6.5(6469)

Configuration/Head/Area Scan (8x12x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 0.379 mW/g



Configuration/Head/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 9.067 V/m; Power Drift = 0.02 dB

Peak SAR (extrapolated) = 0.490 mW/g

SAR(1 g) = 0.378 mW/g; SAR(10 g) = 0.282 mW/g

Maximum value of SAR (measured) = 0.398 mW/g

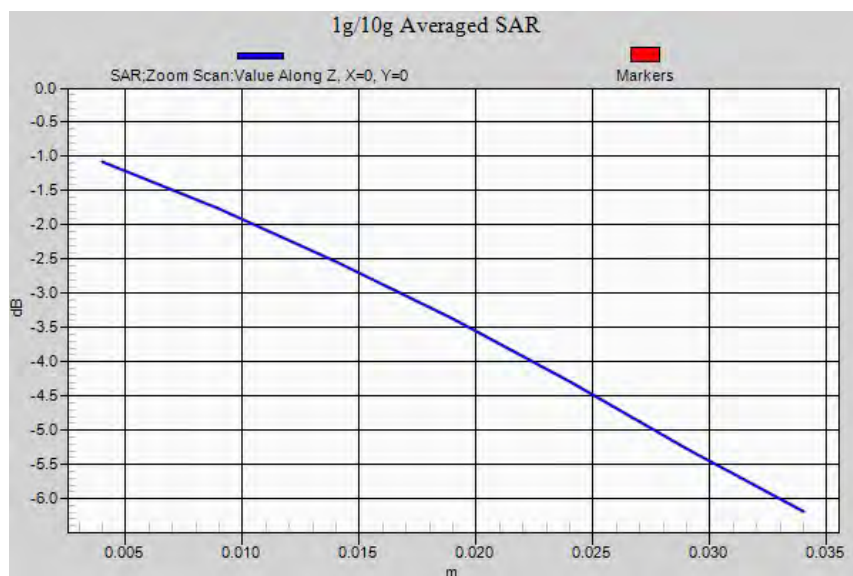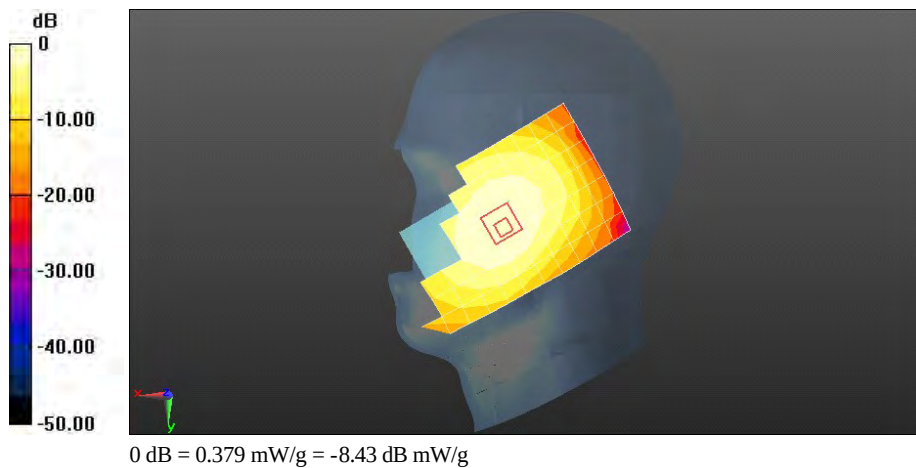

Test Laboratory: HUAWEI SAR Lab

U9510E GSM850 190CH Right hand tilt 15 degree

DUT: U9510E; Type: HSHSPA+/HSUPA/HSDPA/UMTS/GSM/GPRS/EDGE Mobile Phone with Bluetooth; Serial: SAR1

Communication System: HW-GSM\GPRS\EGPRS-1TS; Frequency: 836.6 MHz

Medium parameters used: $f = 837$ MHz; $\sigma = 0.914$ mho/m; $\epsilon_r = 41.429$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY Configuration:

- Probe: EX3DV4 - SN3736; ConvF(9.01, 9.01, 9.01); Calibrated: 4/26/2012;
- Sensor-Surface: 4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE4 Sn852; Calibrated: 11/16/2011
- Phantom: SAM4; Type: SAM; Serial: TP-1620
- DASY52 52.8.1(838); SEMCAD X 14.6.5(6469)

Configuration/Head/Area Scan (8x12x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 0.246 mW/g


Configuration/Head/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 12.521 V/m; Power Drift = -0.00 dB

Peak SAR (extrapolated) = 0.297 mW/g

SAR(1 g) = 0.239 mW/g; SAR(10 g) = 0.182 mW/g

Maximum value of SAR (measured) = 0.251 mW/g

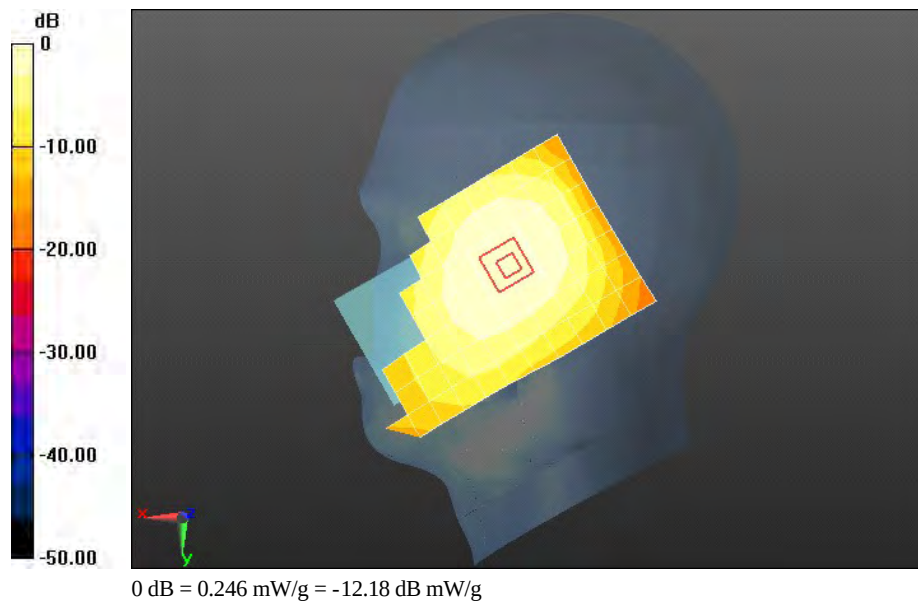

Test Laboratory: HUAWEI SAR Lab

U9510E GSM850 GPRS 1TS 190CH Towards Phantom 10mm

DUT: U9510E; Type: HSPA+/HSUPA/HSDPA/UMTS/GSM/GPRS/EDGE Mobile Phone with Bluetooth; Serial: SAR1

Communication System: HW-GSM\GPRS\EGPRS-1TS; Frequency: 836.6 MHz

Medium parameters used: $f = 837$ MHz; $\sigma = 0.994$ mho/m; $\epsilon_r = 56.502$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3736; ConvF(8.98, 8.98, 8.98); Calibrated: 4/26/2012;
- Sensor-Surface: 4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE4 Sn852; Calibrated: 11/16/2011
- Phantom: SAM3; Type: SAM; Serial: TP-1597
- DASY52 52.8.1(838); SEMCAD X 14.6.5(6469)

Configuration/Body/Area Scan (8x12x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 0.461 mW/g


Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 19.567 V/m; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 0.560 mW/g

SAR(1 g) = 0.445 mW/g; SAR(10 g) = 0.346 mW/g

Maximum value of SAR (measured) = 0.466 mW/g

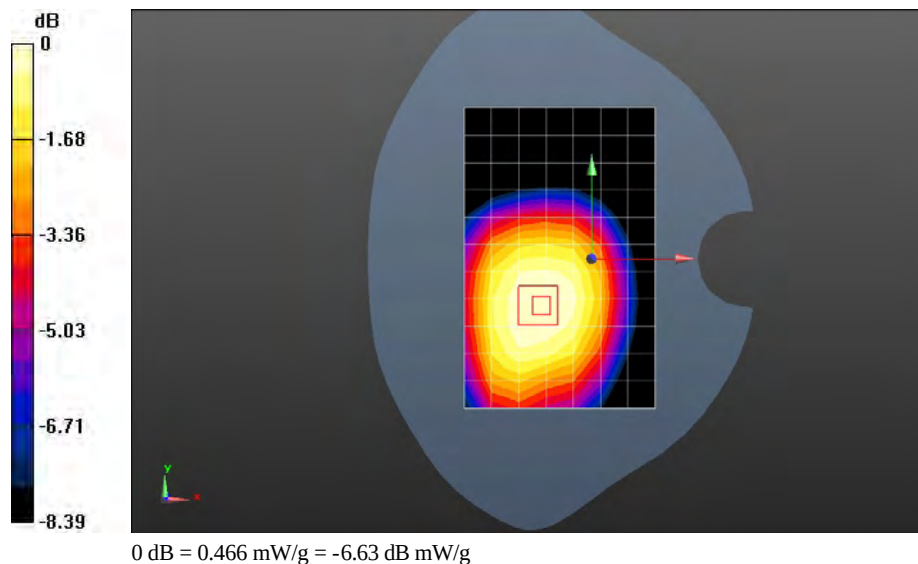

Test Laboratory: HUAWEI SAR Lab

U9510E GSM850 GPRS 2TS 190CH Towards Phantom 10mm

DUT: U9510E; Type: HSPA+/HSUPA/HSDPA/UMTS/GSM/GPRS/EDGE Mobile Phone with Bluetooth; Serial: SAR1

Communication System: HW-GSM\GPRS\EGPRS-2TS; Frequency: 836.6 MHz

Medium parameters used: $f = 837$ MHz; $\sigma = 0.994$ mho/m; $\epsilon_r = 56.502$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3736; ConvF(8.98, 8.98, 8.98); Calibrated: 4/26/2012;
- Sensor-Surface: 4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE4 Sn852; Calibrated: 11/16/2011
- Phantom: SAM3; Type: SAM; Serial: TP-1597
- DASY52 52.8.1(838); SEMCAD X 14.6.5(6469)

Configuration/Body/Area Scan (8x12x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 0.575 mW/g


Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 21.906 V/m; Power Drift = 0.00 dB

Peak SAR (extrapolated) = 0.713 mW/g

SAR(1 g) = 0.562 mW/g; SAR(10 g) = 0.436 mW/g

Maximum value of SAR (measured) = 0.586 mW/g

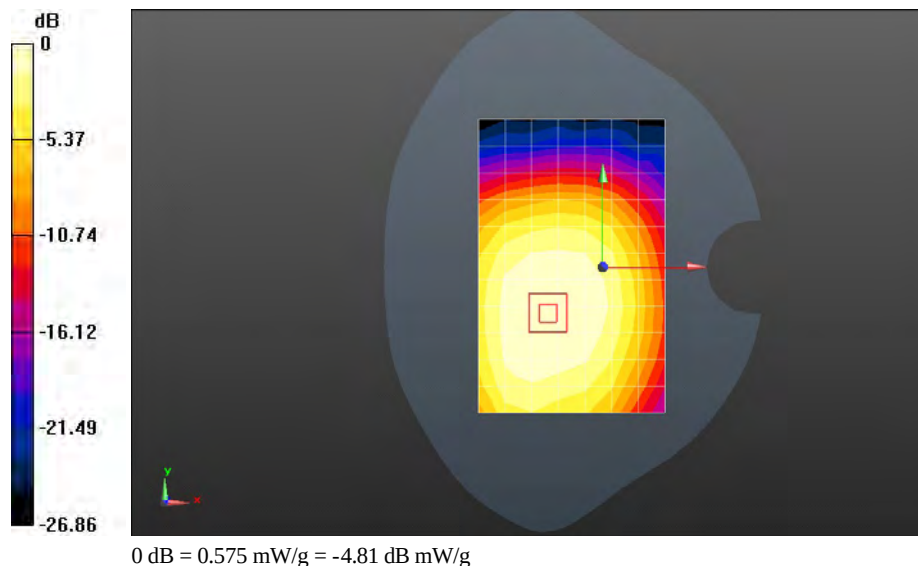

Test Laboratory: HUAWEI SAR Lab

U9510E GSM850 GPRS 2TS 251CH Towards Ground 10mm**DUT: U9510E; Type: HSPA+/HSUPA/HSDPA/UMTS/GSM/GPRS/EDGE Mobile Phone with Bluetooth; Serial: SAR1**

Communication System: HW-GSM\GPRS\EGPRS-2TS; Frequency: 848.8 MHz

Medium parameters used: $f = 849$ MHz; $\sigma = 1.006$ mho/m; $\epsilon_r = 56.373$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3736; ConvF(8.98, 8.98, 8.98); Calibrated: 4/26/2012;
- Sensor-Surface: 4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE4 Sn852; Calibrated: 11/16/2011
- Phantom: SAM3; Type: SAM; Serial: TP-1597
- DASY52 52.8.1(838); SEMCAD X 14.6.5(6469)

Configuration/Body/Area Scan (8x12x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.978 mW/g



Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 30.544 V/m; Power Drift = 0.03 dB

Peak SAR (extrapolated) = 1.194 mW/g

SAR(1 g) = 0.938 mW/g; SAR(10 g) = 0.707 mW/g

Maximum value of SAR (measured) = 0.983 mW/g

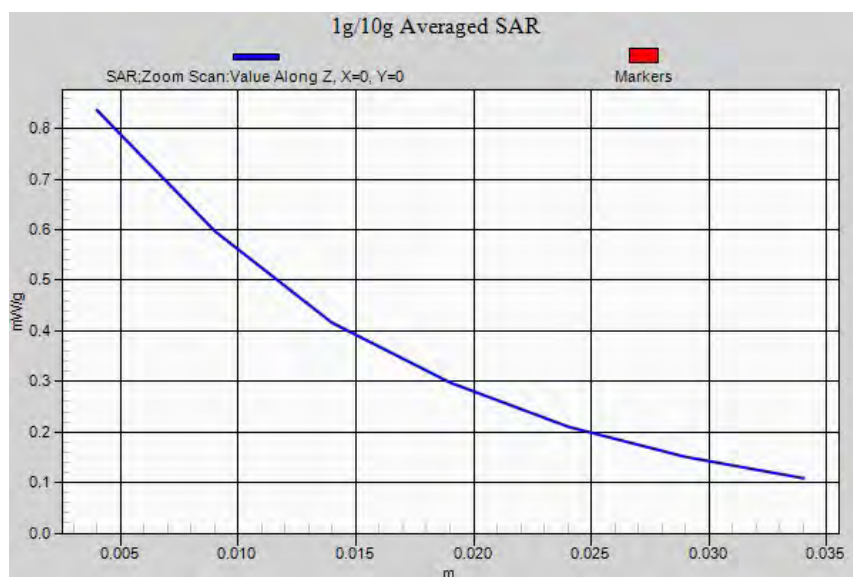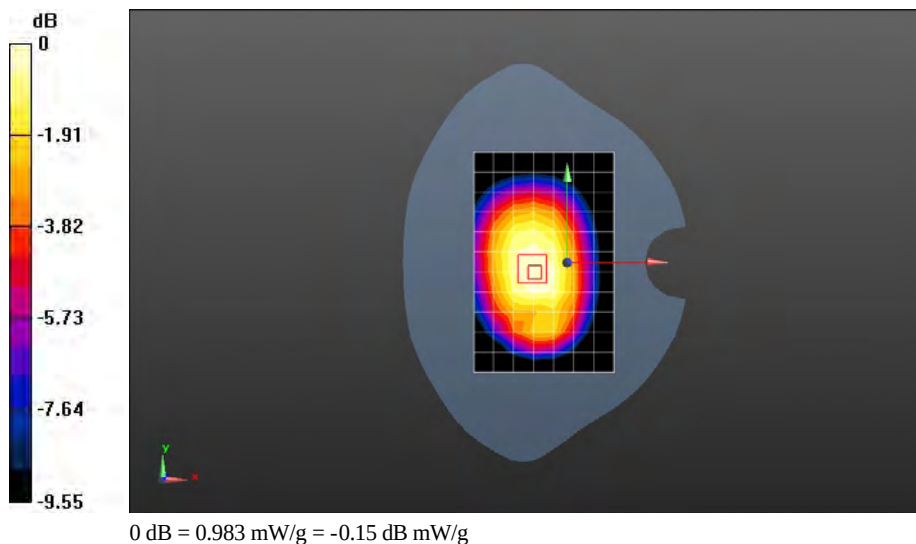

Test Laboratory: HUAWEI SAR Lab

U9510E GSM850 GPRS 2TS 190CH Towards Ground 10mm

DUT: U9510E; Type: HSPA+/HSUPA/HSDPA/UMTS/GSM/GPRS/EDGE Mobile Phone with Bluetooth; Serial: SAR1

Communication System: HW-GSM\GPRS\EGPRS-2TS; Frequency: 836.6 MHz

Medium parameters used: $f = 837$ MHz; $\sigma = 0.994$ mho/m; $\epsilon_r = 56.502$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3736; ConvF(8.98, 8.98, 8.98); Calibrated: 4/26/2012;
- Sensor-Surface: 4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE4 Sn852; Calibrated: 11/16/2011
- Phantom: SAM3; Type: SAM; Serial: TP-1597
- DASY52 52.8.1(838); SEMCAD X 14.6.5(6469)

Configuration/Body/Area Scan (8x12x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 0.875 mW/g


Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 27.491 V/m; Power Drift = 0.03 dB

Peak SAR (extrapolated) = 1.068 mW/g

SAR(1 g) = 0.833 mW/g; SAR(10 g) = 0.628 mW/g

Maximum value of SAR (measured) = 0.873 mW/g

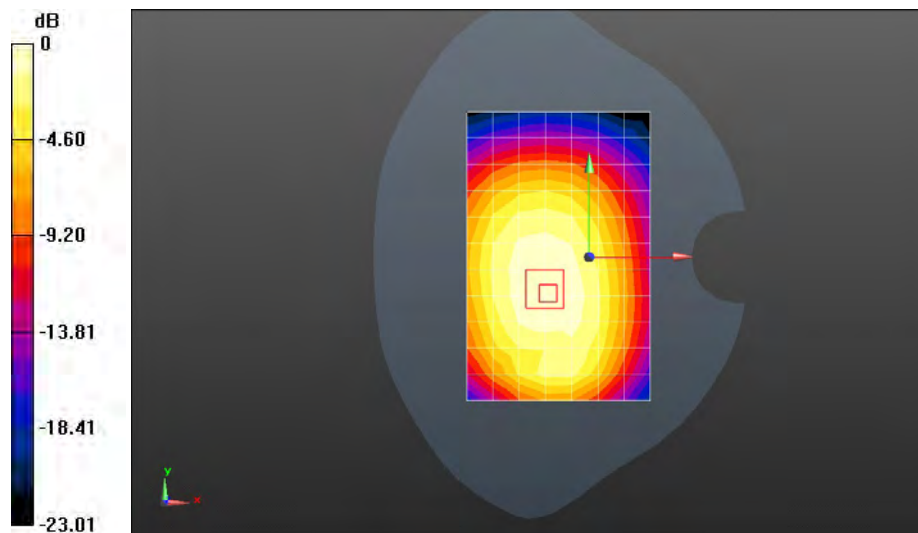

0 dB = 0.875 mW/g = -1.16 dB mW/g

Test Laboratory: HUAWEI SAR Lab

U9510E GSM850 GPRS 2TS 128CH Towards Ground 10mm

DUT: U9510E; Type: HSPA+/HSUPA/HSDPA/UMTS/GSM/GPRS/EDGE Mobile Phone with Bluetooth; Serial: SAR1

Communication System: HW-GSM\GPRS\EGPRS-2TS; Frequency: 824.2 MHz

Medium parameters used (interpolated): $f = 824.2$ MHz; $\sigma = 0.981$ mho/m; $\epsilon_r = 56.631$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3736; ConvF(8.98, 8.98, 8.98); Calibrated: 4/26/2012;
- Sensor-Surface: 4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE4 Sn852; Calibrated: 11/16/2011
- Phantom: SAM3; Type: SAM; Serial: TP-1597
- DASY52 52.8.1(838); SEMCAD X 14.6.5(6469)

Configuration/Body/Area Scan (8x12x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.828 mW/g

Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm


Reference Value = 26.774 V/m; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 1.030 mW/g

SAR(1 g) = 0.794 mW/g; SAR(10 g) = 0.596 mW/g

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.833 mW/g

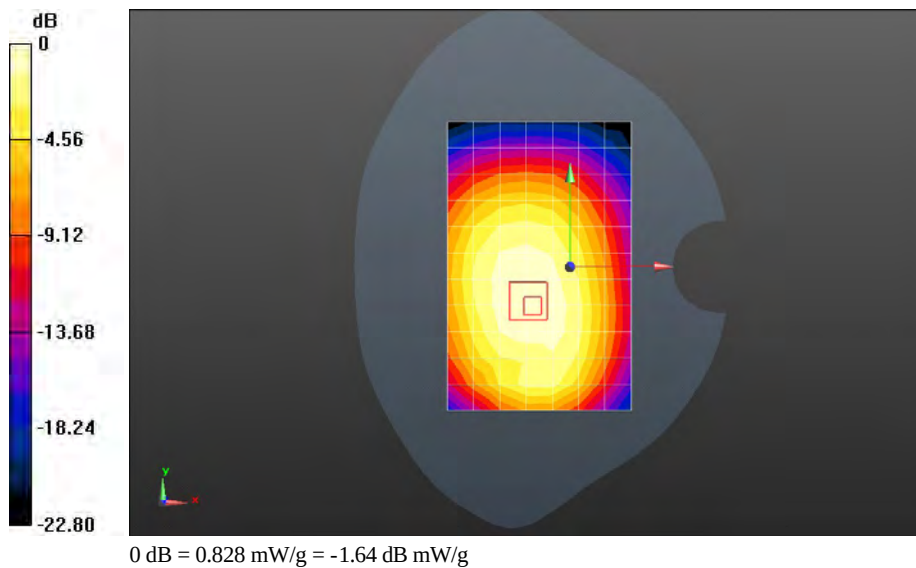

Test Laboratory: HUAWEI SAR Lab

U9510E GSM850 GPRS 2TS 190CH Left edge 10mm

DUT: U9510E; Type: HSPA+/HSUPA/HSDPA/UMTS/GSM/GPRS/EDGE Mobile Phone with Bluetooth; Serial: SAR1

Communication System: HW-GSM\GPRS\EGPRS-2TS; Frequency: 836.6 MHz

Medium parameters used: $f = 837$ MHz; $\sigma = 0.994$ mho/m; $\epsilon_r = 56.502$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3736; ConvF(8.98, 8.98, 8.98); Calibrated: 4/26/2012;
- Sensor-Surface: 4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE4 Sn852; Calibrated: 11/16/2011
- Phantom: SAM3; Type: SAM; Serial: TP-1597
- DASY52 52.8.1(838); SEMCAD X 14.6.5(6469)

Configuration/Body/Area Scan (8x12x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 0.706 mW/g


Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 25.220 V/m; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 0.949 mW/g

SAR(1 g) = 0.661 mW/g; SAR(10 g) = 0.451 mW/g

Maximum value of SAR (measured) = 0.710 mW/g

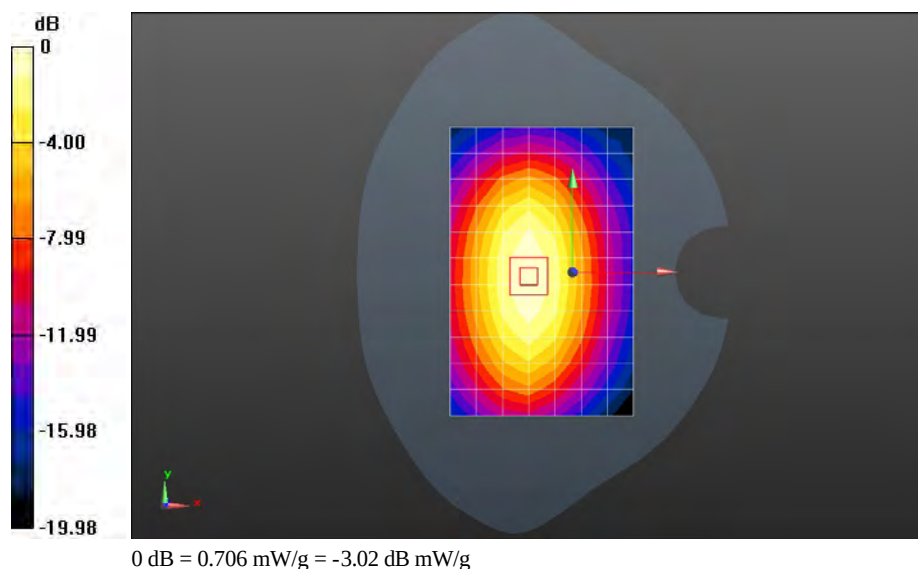

Test Laboratory: HUAWEI SAR Lab

U9510E GSM850 GPRS 2TS 251CH Right edge 10mm

DUT: U9510E; Type: HSPA+/HSUPA/HSDPA/UMTS/GSM/GPRS/EDGE Mobile Phone with Bluetooth; Serial: SAR1

Communication System: HW-GSM\GPRS\EGPRS-2TS; Frequency: 848.8 MHz

Medium parameters used: $f = 849$ MHz; $\sigma = 1.006$ mho/m; $\epsilon_r = 56.373$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3736; ConvF(8.98, 8.98, 8.98); Calibrated: 4/26/2012;
- Sensor-Surface: 4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE4 Sn852; Calibrated: 11/16/2011
- Phantom: SAM3; Type: SAM; Serial: TP-1597
- DASY52 52.8.1(838); SEMCAD X 14.6.5(6469)

Configuration/Body/Area Scan (8x12x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 0.809 mW/g


Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 25.155 V/m; Power Drift = 0.03 dB

Peak SAR (extrapolated) = 1.084 mW/g

SAR(1 g) = 0.782 mW/g; SAR(10 g) = 0.540 mW/g

Maximum value of SAR (measured) = 0.834 mW/g

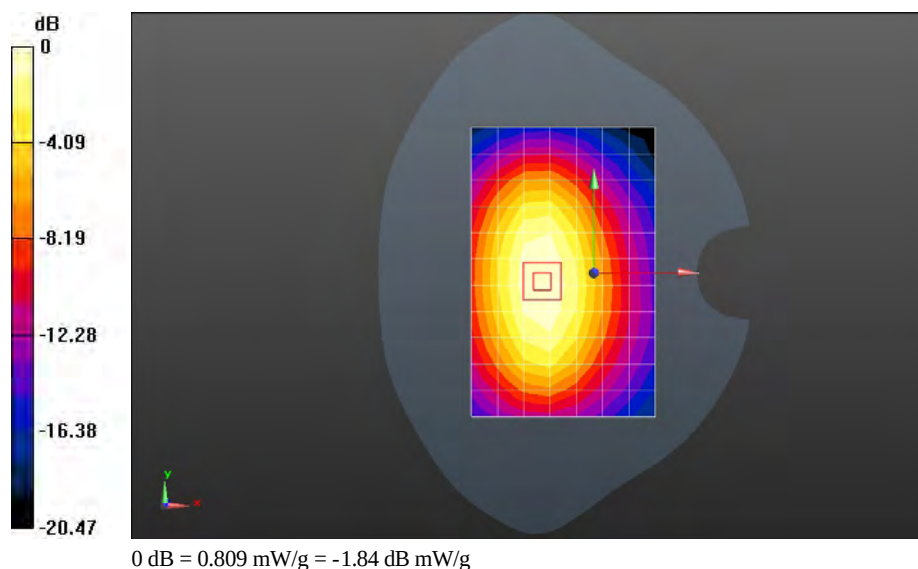

Test Laboratory: HUAWEI SAR Lab

U9510E GSM850 GPRS 2TS 190CH Right edge 10mm

DUT: U9510E; Type: HSPA+/HSUPA/HSDPA/UMTS/GSM/GPRS/EDGE Mobile Phone with Bluetooth; Serial: SAR1

Communication System: HW-GSM\GPRS\EGPRS-2TS; Frequency: 836.6 MHz

Medium parameters used: $f = 837$ MHz; $\sigma = 0.994$ mho/m; $\epsilon_r = 56.502$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3736; ConvF(8.98, 8.98, 8.98); Calibrated: 4/26/2012;
- Sensor-Surface: 4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE4 Sn852; Calibrated: 11/16/2011
- Phantom: SAM3; Type: SAM; Serial: TP-1597
- DASY52 52.8.1(838); SEMCAD X 14.6.5(6469)

Configuration/Body/Area Scan (8x12x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 0.877 mW/g


Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 26.422 V/m; Power Drift = 0.08 dB

Peak SAR (extrapolated) = 1.200 mW/g

SAR(1 g) = 0.849 mW/g; SAR(10 g) = 0.582 mW/g

Maximum value of SAR (measured) = 0.910 mW/g

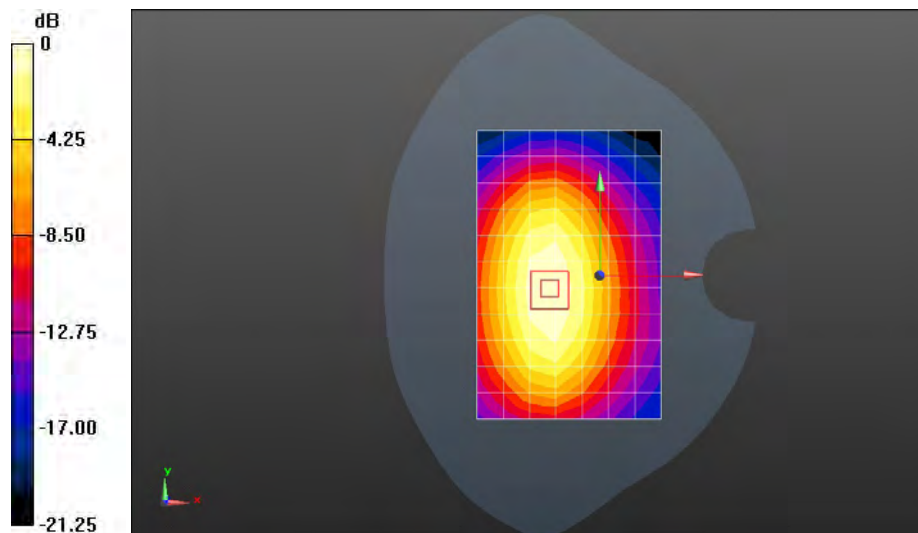

0 dB = 0.877 mW/g = -1.14 dB mW/g

Test Laboratory: HUAWEI SAR Lab

U9510E GSM850 GPRS 2TS 128CH Right edge 10mm

DUT: U9510E; Type: HSPA+/HSUPA/HSDPA/UMTS/GSM/GPRS/EDGE Mobile Phone with Bluetooth; Serial: SAR1

Communication System: HW-GSM\GPRS\EGPRS-2TS; Frequency: 824.2 MHz

Medium parameters used (interpolated): $f = 824.2$ MHz; $\sigma = 0.981$ mho/m; $\epsilon_r = 56.631$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3736; ConvF(8.98, 8.98, 8.98); Calibrated: 4/26/2012;
- Sensor-Surface: 4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE4 Sn852; Calibrated: 11/16/2011
- Phantom: SAM3; Type: SAM; Serial: TP-1597
- DASY52 52.8.1(838); SEMCAD X 14.6.5(6469)

Configuration/Body/Area Scan (8x12x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.687 mW/g

Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm


Reference Value = 23.525 V/m; Power Drift = 0.06 dB

Peak SAR (extrapolated) = 0.912 mW/g

SAR(1 g) = 0.666 mW/g; SAR(10 g) = 0.463 mW/g

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.711 mW/g

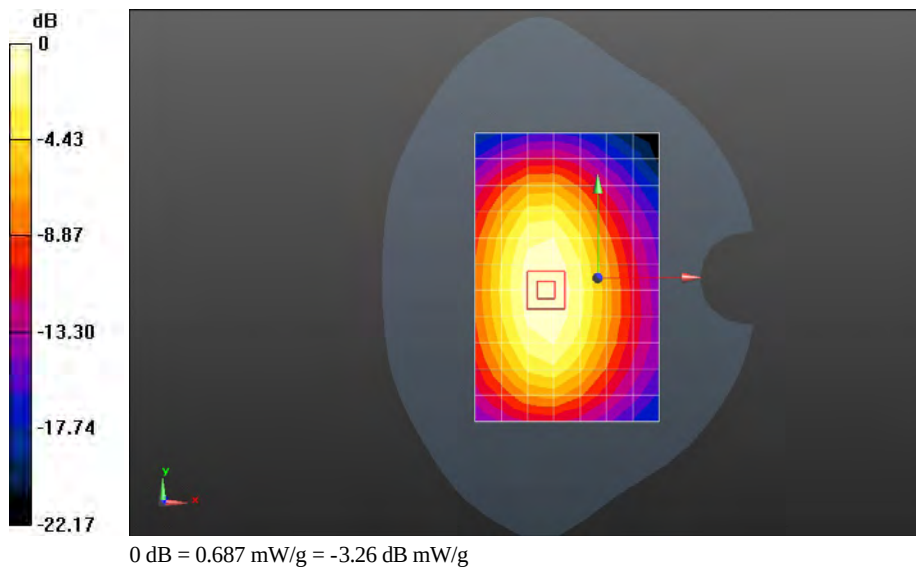

Test Laboratory: HUAWEI SAR Lab

U9510E GSM850 GPRS 2TS 190CH Bottom edge 10mm

DUT: U9510E; Type: HSPA+/HSUPA/HSDPA/UMTS/GSM/GPRS/EDGE Mobile Phone with Bluetooth; Serial: SAR1

Communication System: HW-GSM\GPRS\EGPRS-2TS; Frequency: 836.6 MHz

Medium parameters used: $f = 837$ MHz; $\sigma = 0.994$ mho/m; $\epsilon_r = 56.502$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3736; ConvF(8.98, 8.98, 8.98); Calibrated: 4/26/2012;
- Sensor-Surface: 4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE4 Sn852; Calibrated: 11/16/2011
- Phantom: SAM3; Type: SAM; Serial: TP-1597
- DASY52 52.8.1(838); SEMCAD X 14.6.5(6469)

Configuration/Body/Area Scan (8x12x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 0.213 mW/g


Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 12.354 V/m; Power Drift = 0.17 dB

Peak SAR (extrapolated) = 0.362 mW/g

SAR(1 g) = 0.202 mW/g; SAR(10 g) = 0.111 mW/g

Maximum value of SAR (measured) = 0.224 mW/g

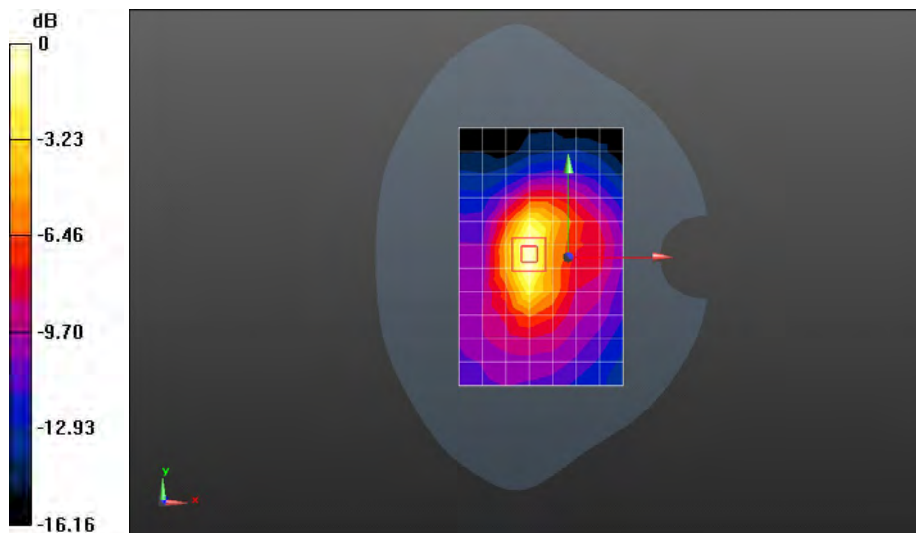

0 dB = 0.213 mW/g = -13.43 dB mW/g

Test Laboratory: HUAWEI SAR Lab

U9510E GSM850 EGPRS 1TS 190CH Towards Ground 10mm

DUT: U9510E; Type: HSPA+/HSUPA/HSDPA/UMTS/GSM/GPRS/EDGE Mobile Phone with Bluetooth; Serial: SAR1

Communication System: HW-GSM\GPRS\EGPRS-1TS; Frequency: 836.6 MHz

Medium parameters used: $f = 837$ MHz; $\sigma = 0.994$ mho/m; $\epsilon_r = 56.502$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3736; ConvF(8.98, 8.98, 8.98); Calibrated: 4/26/2012;
- Sensor-Surface: 4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE4 Sn852; Calibrated: 11/16/2011
- Phantom: SAM3; Type: SAM; Serial: TP-1597
- DASY52 52.8.1(838); SEMCAD X 14.6.5(6469)

Configuration/Body/Area Scan (8x12x1): Measurement grid: $dx=15$ mm, $dy=15$ mm


Maximum value of SAR (measured) = 0.685 mW/g

Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 24.425 V/m; Power Drift = 0.04 dB

Peak SAR (extrapolated) = 0.842 mW/g

SAR(1 g) = 0.652 mW/g; SAR(10 g) = 0.490 mW/g

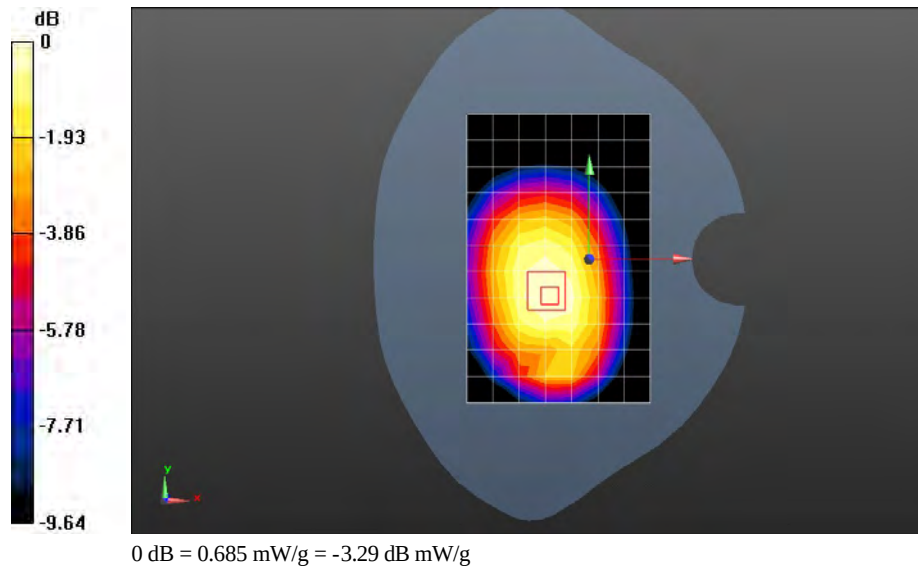

Test Laboratory: HUAWEI SAR Lab

U9510E GSM850 EGPRS 2TS 251CH Towards Ground 10mm

DUT: U9510E; Type: HSPA+/HSUPA/HSDPA/UMTS/GSM/GPRS/EDGE Mobile Phone with Bluetooth; Serial: SAR1

Communication System: HW-GSM\GPRS\EGPRS-2TS; Frequency: 848.8 MHz

Medium parameters used: $f = 849$ MHz; $\sigma = 1.006$ mho/m; $\epsilon_r = 56.373$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3736; ConvF(8.98, 8.98, 8.98); Calibrated: 4/26/2012;
- Sensor-Surface: 4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE4 Sn852; Calibrated: 11/16/2011
- Phantom: SAM3; Type: SAM; Serial: TP-1597
- DASY52 52.8.1(838); SEMCAD X 14.6.5(6469)

Configuration/Body/Area Scan (8x12x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 0.880 mW/g


Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 27.467 V/m; Power Drift = -0.02 dB

Peak SAR (extrapolated) = 1.055 mW/g

SAR(1 g) = 0.847 mW/g; SAR(10 g) = 0.641 mW/g

Maximum value of SAR (measured) = 0.887 mW/g

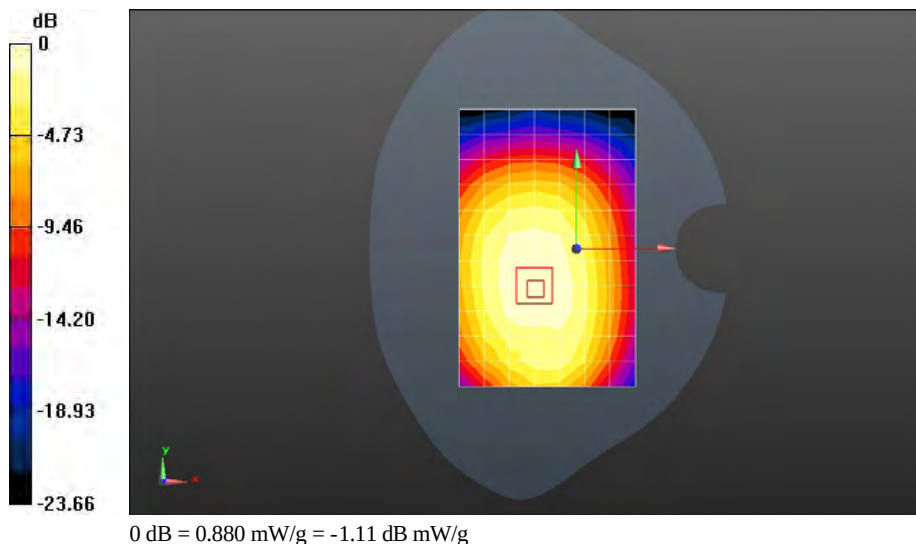

Test Laboratory: HUAWEI SAR Lab

U9510E GSM850 EGPRS 2TS 190CH Towards Ground 10mm

DUT: U9510E; Type: HSPA+/HSUPA/HSDPA/UMTS/GSM/GPRS/EDGE Mobile Phone with Bluetooth; Serial: SAR1

Communication System: HW-GSM\GPRS\EGPRS-2TS; Frequency: 836.6 MHz

Medium parameters used: $f = 837$ MHz; $\sigma = 0.994$ mho/m; $\epsilon_r = 56.502$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3736; ConvF(8.98, 8.98, 8.98); Calibrated: 4/26/2012;
- Sensor-Surface: 4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE4 Sn852; Calibrated: 11/16/2011
- Phantom: SAM3; Type: SAM; Serial: TP-1597
- DASY52 52.8.1(838); SEMCAD X 14.6.5(6469)

Configuration/Body/Area Scan (8x12x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 0.855 mW/g


Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 27.205 V/m; Power Drift = 0.05 dB

Peak SAR (extrapolated) = 1.047 mW/g

SAR(1 g) = 0.812 mW/g; SAR(10 g) = 0.613 mW/g

Maximum value of SAR (measured) = 0.851 mW/g

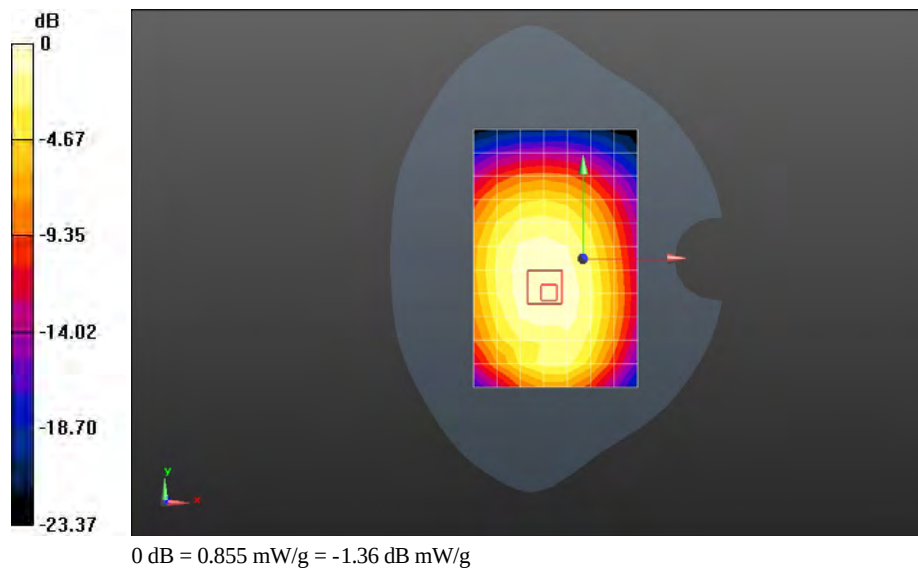

Test Laboratory: HUAWEI SAR Lab

U9510E GSM850 EGPRS 2TS 128CH Towards Ground 10mm

DUT: U9510E; Type: HSPA+/HSUPA/HSDPA/UMTS/GSM/GPRS/EDGE Mobile Phone with Bluetooth; Serial: SAR1

Communication System: HW-GSM\GPRS\EGPRS-2TS; Frequency: 824.2 MHz

Medium parameters used (interpolated): $f = 824.2$ MHz; $\sigma = 0.981$ mho/m; $\epsilon_r = 56.631$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3736; ConvF(8.98, 8.98, 8.98); Calibrated: 4/26/2012;
- Sensor-Surface: 4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE4 Sn852; Calibrated: 11/16/2011
- Phantom: SAM3; Type: SAM; Serial: TP-1597
- DASY52 52.8.1(838); SEMCAD X 14.6.5(6469)

Configuration/Body/Area Scan (8x12x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.800 mW/g

Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm


Reference Value = 25.983 V/m; Power Drift = 0.03 dB

Peak SAR (extrapolated) = 0.962 mW/g

SAR(1 g) = 0.769 mW/g; SAR(10 g) = 0.580 mW/g

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.809 mW/g

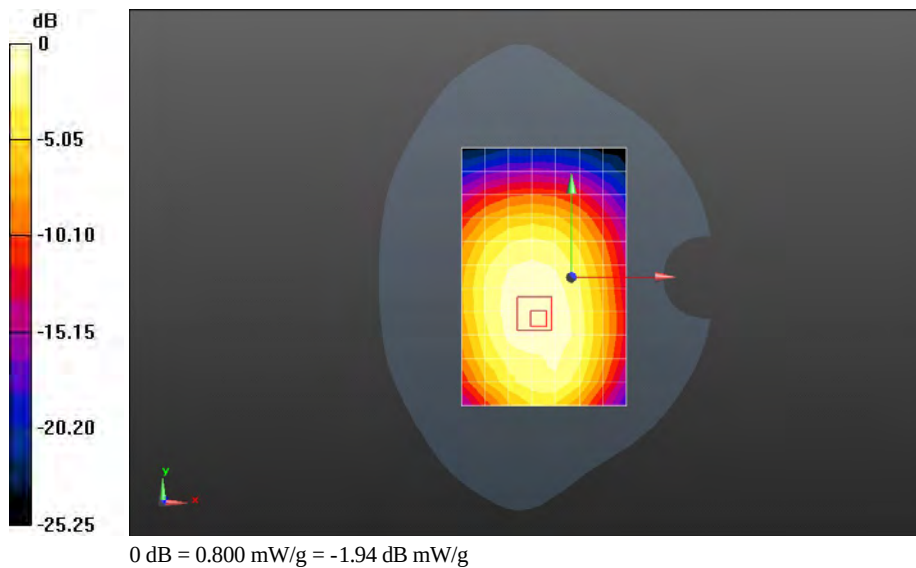

Test Laboratory: HUAWEI SAR Lab

U9510E GSM850 190CH Towards Ground 10mm with Headset

DUT: U9510E; Type: HSPA+/HSUPA/HSDPA/UMTS/GSM/GPRS/EDGE Mobile Phone with Bluetooth; Serial: SAR1

Communication System: HW-GSM\GPRS\EGPRS-1TS; Frequency: 848.8 MHz

Medium parameters used: $f = 849$ MHz; $\sigma = 1.006$ mho/m; $\epsilon_r = 56.373$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3736; ConvF(8.98, 8.98, 8.98); Calibrated: 4/26/2012;
- Sensor-Surface: 4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE4 Sn852; Calibrated: 11/16/2011
- Phantom: SAM3; Type: SAM; Serial: TP-1597
- DASY52 52.8.1(838); SEMCAD X 14.6.5(6469)

Configuration/Body/Area Scan (8x12x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 0.520 mW/g


Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 21.698 V/m; Power Drift = 0.02 dB

Peak SAR (extrapolated) = 0.670 mW/g

SAR(1 g) = 0.507 mW/g; SAR(10 g) = 0.373 mW/g

Maximum value of SAR (measured) = 0.536 mW/g

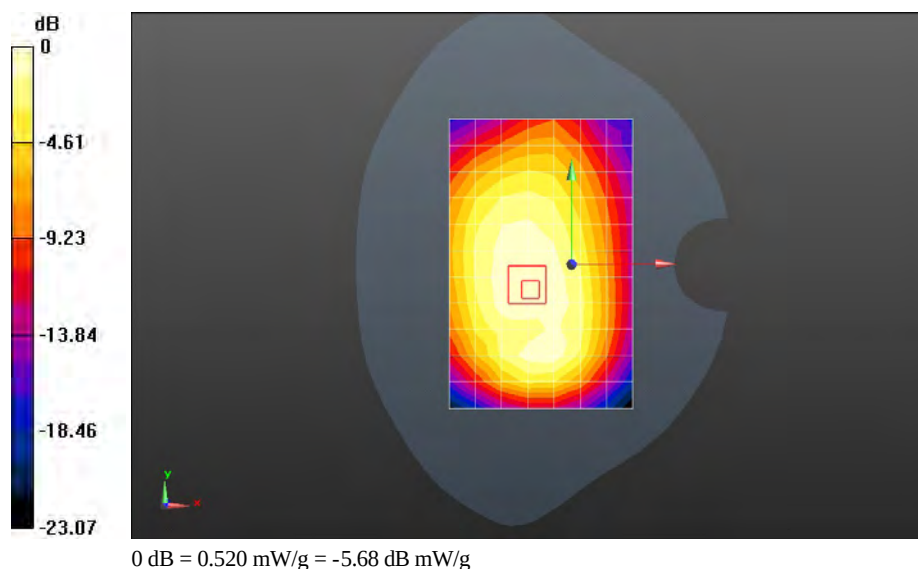

Test Laboratory: HUAWEI SAR Lab

U9510E GSM1900 661CH Left hand touch cheek

DUT: U9510E; Type: HSPA+/HSPA/HSDPA/UMTS/GSM/GPRS/EDGE Mobile Phone with Bluetooth; Serial: SAR1

Communication System: HW-GSM/GPRS/EGPRS-1TS; Frequency: 1880 MHz

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.434$ mho/m; $\epsilon_r = 39.851$; $\rho = 1000$ kg/m³

Phantom section: Left Section

DASY Configuration:

- Probe: EX3DV4 - SN3736; ConvF(7.67, 7.67, 7.67); Calibrated: 4/26/2012;
- Sensor-Surface: 4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE4 Sn852; Calibrated: 11/16/2011
- Phantom: SAM4; Type: SAM; Serial: TP-1620
- DASY52 52.8.1(838); SEMCAD X 14.6.5(6469)

Configuration/Head/Area Scan (8x12x1): Measurement grid: $dx=15$ mm, $dy=15$ mm


Maximum value of SAR (measured) = 0.224 mW/g

Configuration/Head/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 7.442 V/m; Power Drift = -0.06 dB

Peak SAR (extrapolated) = 0.347 mW/g

SAR(1 g) = 0.207 mW/g; SAR(10 g) = 0.126 mW/g

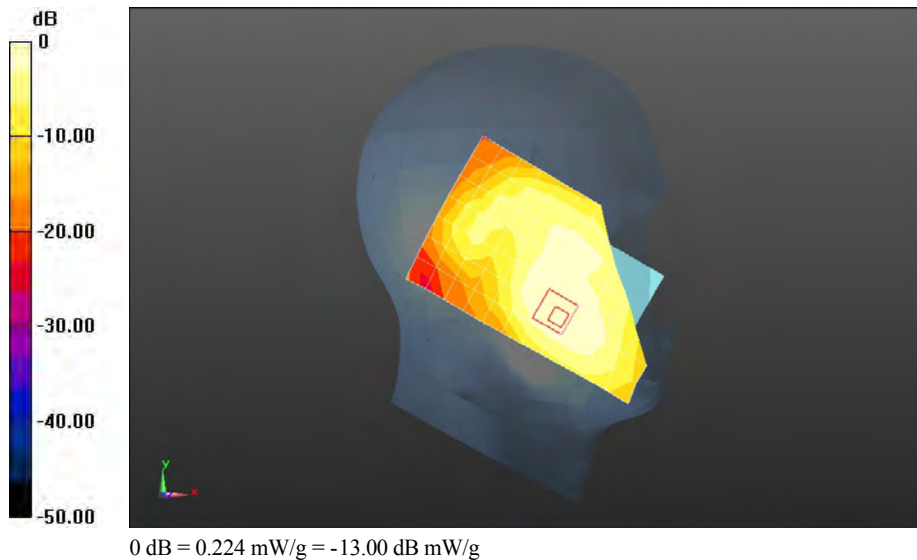

Test Laboratory: HUAWEI SAR Lab

U9510E GSM1900 661CH Left hand tilt 15 degree

DUT: U9510E; Type: HSHSPA+/HSUPA/HSDPA/UMTS/GSM/GPRS/EDGE Mobile Phone with Bluetooth; Serial: SAR1

Communication System: HW-GSM\GPRS\EGPRS-1TS; Frequency: 1880 MHz

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.434$ mho/m; $\epsilon_r = 39.851$; $\rho = 1000$ kg/m³

Phantom section: Left Section

DASY Configuration:

- Probe: EX3DV4 - SN3736; ConvF(7.67, 7.67, 7.67); Calibrated: 4/26/2012;
- Sensor-Surface: 4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE4 Sn852; Calibrated: 11/16/2011
- Phantom: SAM4; Type: SAM; Serial: TP-1620
- DASY52 52.8.1(838); SEMCAD X 14.6.5(6469)

Configuration/Head/Area Scan (8x12x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 0.148 mW/g


Configuration/Head/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 10.614 V/m; Power Drift = 0.03 dB

Peak SAR (extrapolated) = 0.268 mW/g

SAR(1 g) = 0.149 mW/g; SAR(10 g) = 0.082 mW/g

Maximum value of SAR (measured) = 0.165 mW/g

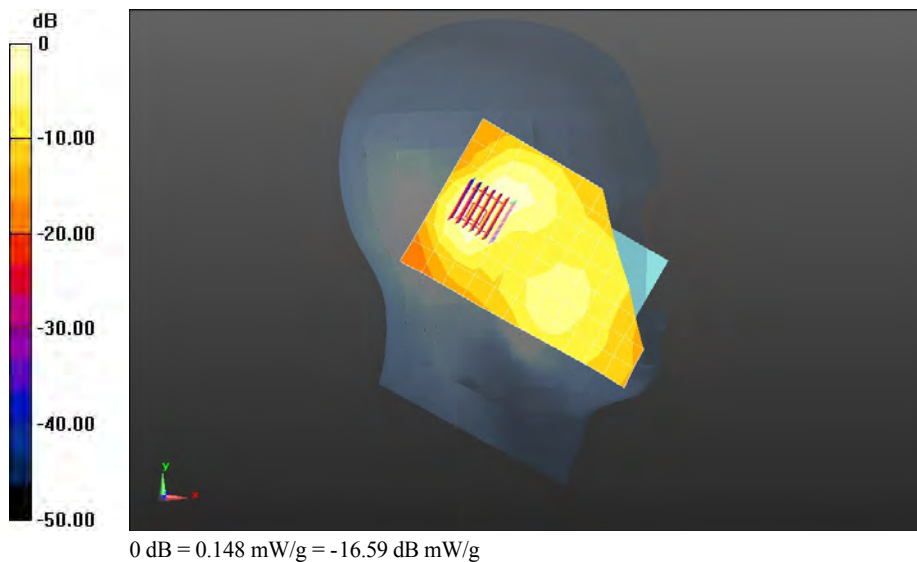

Test Laboratory: HUAWEI SAR Lab

U9510E GSM1900 661CH Right hand touch cheek

DUT: U9510E; Type: HSHSPA+/HSUPA/HSDPA/UMTS/GSM/GPRS/EDGE Mobile Phone with Bluetooth; Serial: SAR1

Communication System: HW-GSM\GPRS\EGPRS-1TS; Frequency: 1880 MHz

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.434$ mho/m; $\epsilon_r = 39.851$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY Configuration:

- Probe: EX3DV4 - SN3736; ConvF(7.67, 7.67, 7.67); Calibrated: 4/26/2012;
- Sensor-Surface: 4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE4 Sn852; Calibrated: 11/16/2011
- Phantom: SAM4; Type: SAM; Serial: TP-1620
- DASY52 52.8.1(838); SEMCAD X 14.6.5(6469)

Configuration/Head/Area Scan (8x12x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 0.244 mW/g



Configuration/Head/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 7.168 V/m; Power Drift = 0.18 dB

Peak SAR (extrapolated) = 0.379 mW/g

SAR(1 g) = 0.239 mW/g; SAR(10 g) = 0.144 mW/g

Maximum value of SAR (measured) = 0.260 mW/g

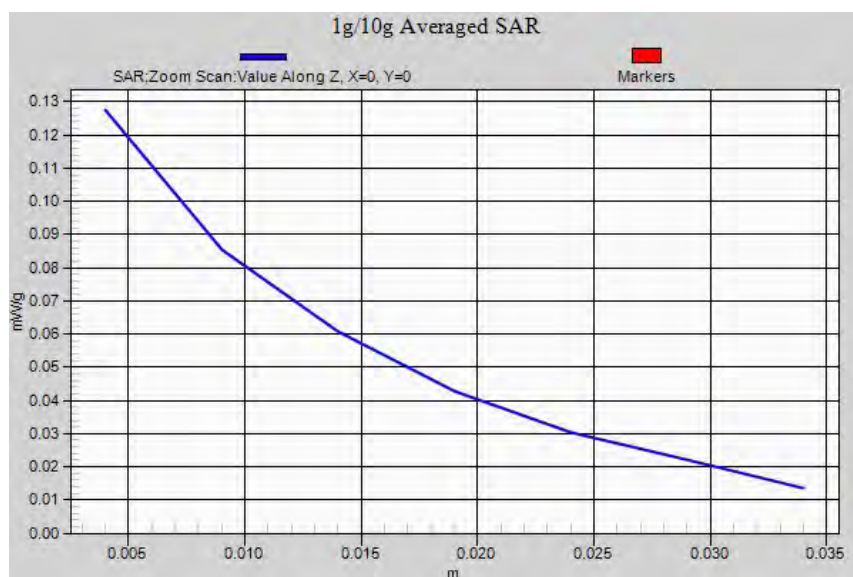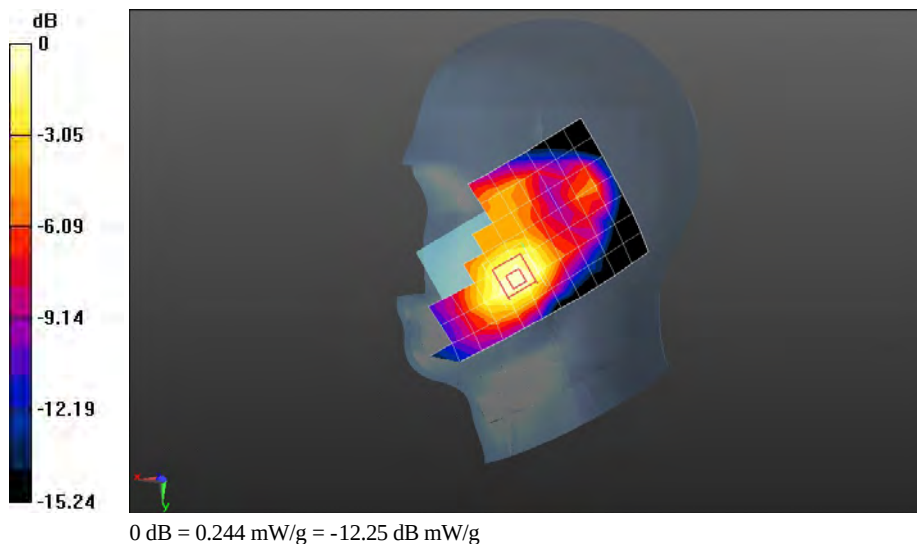

Test Laboratory: HUAWEI SAR Lab

U9510E GSM1900 661CH Right hand tilt 15 degree

DUT: U9510E; Type: HSHSPA+/HSUPA/HSDPA/UMTS/GSM/GPRS/EDGE Mobile Phone with Bluetooth; Serial: SAR1

Communication System: HW-GSM\GPRS\EGPRS-1TS; Frequency: 1880 MHz

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.434$ mho/m; $\epsilon_r = 39.851$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY Configuration:

- Probe: EX3DV4 - SN3736; ConvF(7.67, 7.67, 7.67); Calibrated: 4/26/2012;
- Sensor-Surface: 4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE4 Sn852; Calibrated: 11/16/2011
- Phantom: SAM4; Type: SAM; Serial: TP-1620
- DASY52 52.8.1(838); SEMCAD X 14.6.5(6469)

Configuration/Head/Area Scan (8x12x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 0.114 mW/g


Configuration/Head/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 10.141 V/m; Power Drift = 0.04 dB

Peak SAR (extrapolated) = 0.252 mW/g

SAR(1 g) = 0.140 mW/g; SAR(10 g) = 0.075 mW/g

Maximum value of SAR (measured) = 0.157 mW/g

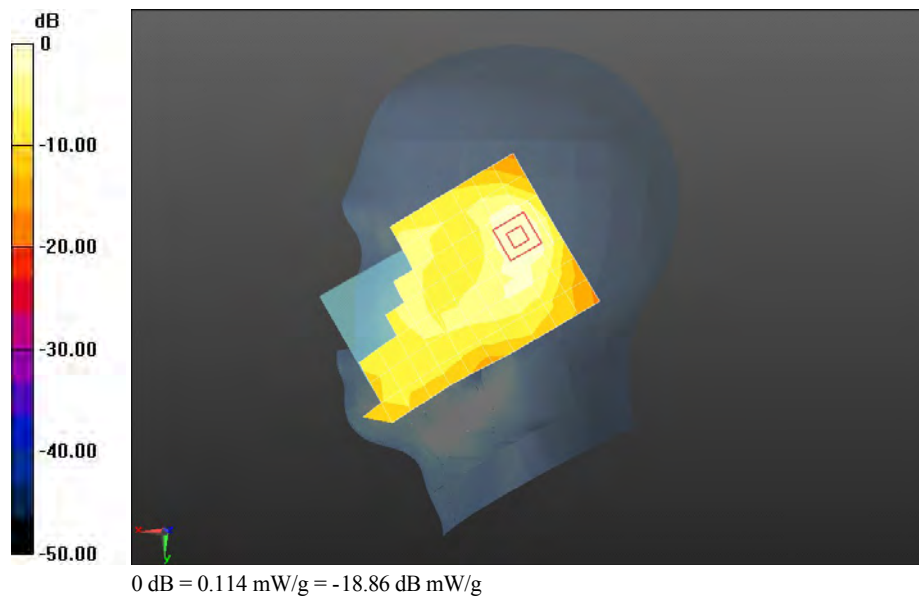

Test Laboratory: HUAWEI SAR Lab

U9510E GSM1900 GPRS 1TS 661CH Towards Phantom 10mm

DUT: U9510E; Type: HSPA+/HSUPA/HSDPA/UMTS/GSM/GPRS/EDGE Mobile Phone with Bluetooth; Serial: SAR1

Communication System: HW-GSM\GPRS\EGPRS-1TS; Frequency: 1880 MHz

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.536$ mho/m; $\epsilon_r = 52.98$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3736; ConvF(7.14, 7.14, 7.14); Calibrated: 4/26/2012;
- Sensor-Surface: 4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE4 Sn852; Calibrated: 11/16/2011
- Phantom: SAM4; Type: SAM; Serial: TP-1620
- DASY52 52.8.1(838); SEMCAD X 14.6.5(6469)

Configuration/Body/Area Scan (8x12x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 0.349 mW/g


Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 5.813 V/m; Power Drift = -0.08 dB

Peak SAR (extrapolated) = 0.501 mW/g

SAR(1 g) = 0.319 mW/g; SAR(10 g) = 0.192 mW/g

Maximum value of SAR (measured) = 0.351 mW/g

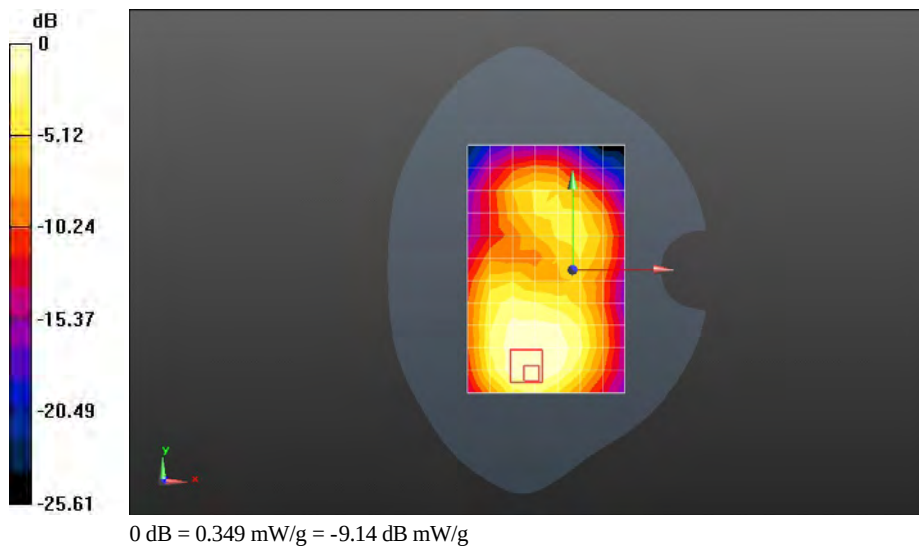

Test Laboratory: HUAWEI SAR Lab

U9510E GSM1900 GPRS 2TS 661CH Towards Phantom 10mm

DUT: U9510E; Type: HSPA+/HSUPA/HSDPA/UMTS/GSM/GPRS/EDGE Mobile Phone with Bluetooth; Serial: SAR1

Communication System: HW-GSM\GPRS\EGPRS-2TS; Frequency: 1880 MHz

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.536$ mho/m; $\epsilon_r = 52.98$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3736; ConvF(7.14, 7.14, 7.14); Calibrated: 4/26/2012;
- Sensor-Surface: 4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE4 Sn852; Calibrated: 11/16/2011
- Phantom: SAM4; Type: SAM; Serial: TP-1620
- DASY52 52.8.1(838); SEMCAD X 14.6.5(6469)

Configuration/Body/Area Scan (8x12x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 0.438 mW/g


Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 6.501 V/m; Power Drift = -0.09 dB

Peak SAR (extrapolated) = 0.664 mW/g

SAR(1 g) = 0.404 mW/g; SAR(10 g) = 0.243 mW/g

Maximum value of SAR (measured) = 0.444 mW/g

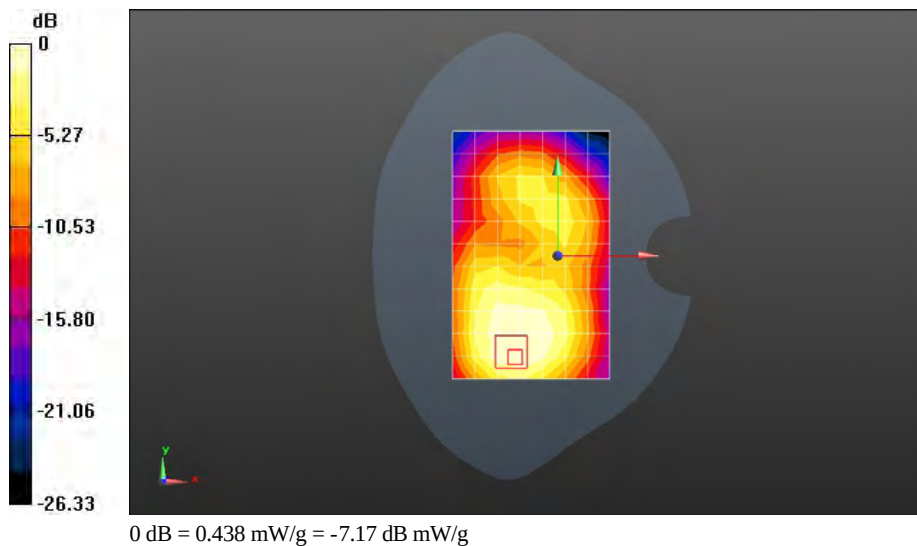

Test Laboratory: HUAWEI SAR Lab

U9510E GSM1900 GPRS 2TS 661CH Towards Ground 10mm

DUT: U9510E; Type: HSPA+/HSUPA/HSDPA/UMTS/GSM/GPRS/EDGE Mobile Phone with Bluetooth; Serial: SAR1

Communication System: HW-GSM\GPRS\EGPRS-2TS; Frequency: 1880 MHz

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.536$ mho/m; $\epsilon_r = 52.98$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3736; ConvF(7.14, 7.14, 7.14); Calibrated: 4/26/2012;
- Sensor-Surface: 4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE4 Sn852; Calibrated: 11/16/2011
- Phantom: SAM4; Type: SAM; Serial: TP-1620
- DASY52 52.8.1(838); SEMCAD X 14.6.5(6469)

Configuration/Body/Area Scan (8x12x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 0.436 mW/g


Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 7.167 V/m; Power Drift = 0.07 dB

Peak SAR (extrapolated) = 0.741 mW/g

SAR(1 g) = 0.435 mW/g; SAR(10 g) = 0.253 mW/g

Maximum value of SAR (measured) = 0.481 mW/g

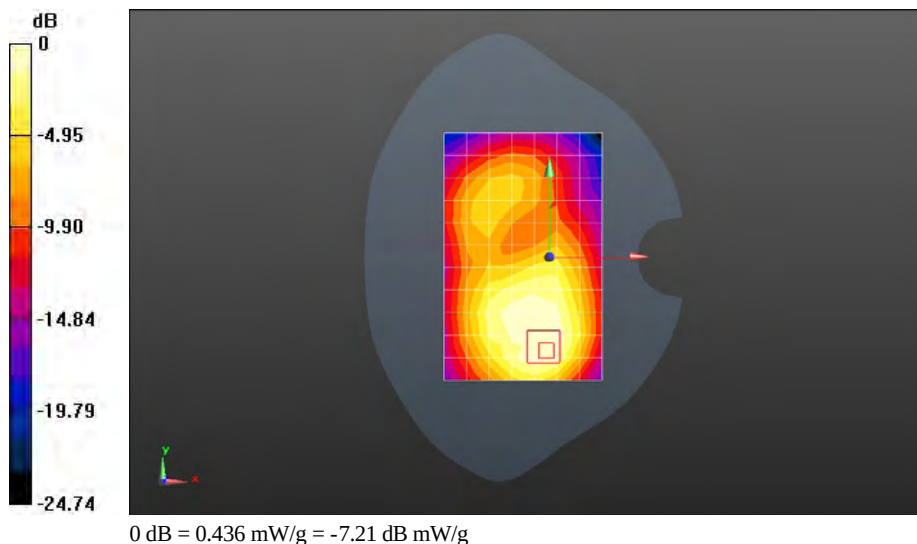

Test Laboratory: HUAWEI SAR Lab

U9510E GSM1900 GPRS 2TS 661CH Left edge 10mm

DUT: U9510E; Type: HSPA+/HSUPA/HSDPA/UMTS/GSM/GPRS/EDGE Mobile Phone with Bluetooth; Serial: SAR1

Communication System: HW-GSM\GPRS\EGPRS-2TS; Frequency: 1880 MHz

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.536$ mho/m; $\epsilon_r = 52.98$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3736; ConvF(7.14, 7.14, 7.14); Calibrated: 4/26/2012;
- Sensor-Surface: 4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE4 Sn852; Calibrated: 11/16/2011
- Phantom: SAM4; Type: SAM; Serial: TP-1620
- DASY52 52.8.1(838); SEMCAD X 14.6.5(6469)

Configuration/Body/Area Scan (8x12x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 0.218 mW/g


Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 9.655 V/m; Power Drift = 0.08 dB

Peak SAR (extrapolated) = 0.387 mW/g

SAR(1 g) = 0.243 mW/g; SAR(10 g) = 0.139 mW/g

Maximum value of SAR (measured) = 0.270 mW/g

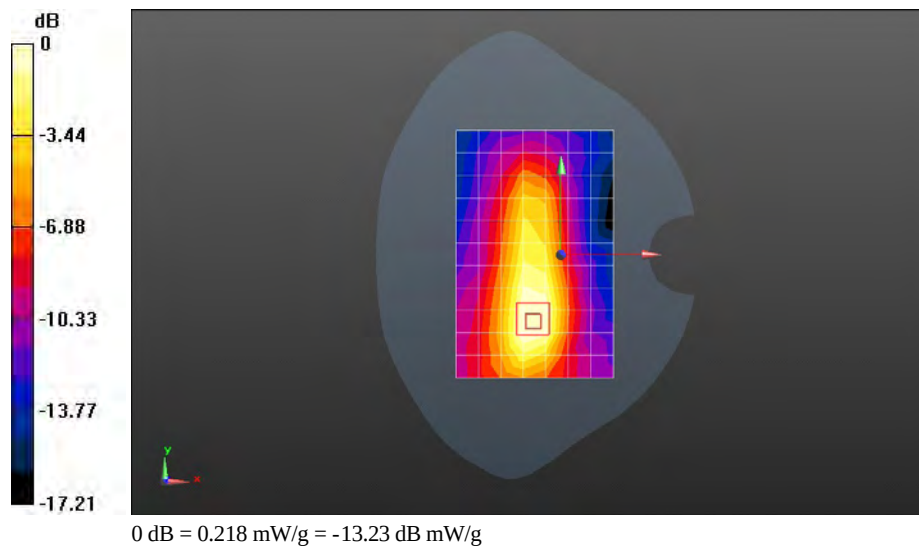

Test Laboratory: HUAWEI SAR Lab

U9510E GSM1900 GPRS 2TS 661CH Right edge 10mm

DUT: U9510E; Type: HSPA+/HSUPA/HSDPA/UMTS/GSM/GPRS/EDGE Mobile Phone with Bluetooth; Serial: SAR1

Communication System: HW-GSM\GPRS\EGPRS-2TS; Frequency: 1880 MHz

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.536$ mho/m; $\epsilon_r = 52.98$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3736; ConvF(7.14, 7.14, 7.14); Calibrated: 4/26/2012;
- Sensor-Surface: 4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE4 Sn852; Calibrated: 11/16/2011
- Phantom: SAM4; Type: SAM; Serial: TP-1620
- DASY52 52.8.1(838); SEMCAD X 14.6.5(6469)

Configuration/Body/Area Scan (8x12x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 0.133 mW/g

Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 5.960 V/m; Power Drift = 0.04 dB

Peak SAR (extrapolated) = 0.198 mW/g

SAR(1 g) = 0.127 mW/g; SAR(10 g) = 0.075 mW/g

Maximum value of SAR (measured) = 0.139 mW/g


Configuration/Body/Zoom Scan (7x7x7)/Cube 1: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 5.960 V/m; Power Drift = 0.04 dB

Peak SAR (extrapolated) = 0.188 mW/g

SAR(1 g) = 0.122 mW/g; SAR(10 g) = 0.074 mW/g

Maximum value of SAR (measured) = 0.132 mW/g

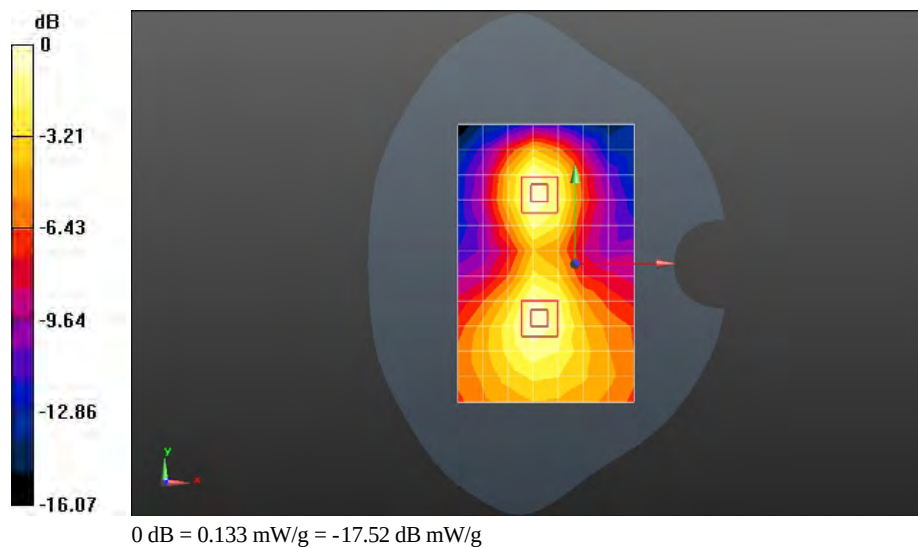

Test Laboratory: HUAWEI SAR Lab

U9510E GSM1900 GPRS 2TS 661CH Bottom edge 10mm**DUT: U9510E; Type: HSPA+/HSUPA/HSDPA/UMTS/GSM/GPRS/EDGE Mobile Phone with Bluetooth; Serial: SAR1**

Communication System: HW-GSM\GPRS\EGPRS-2TS; Frequency: 1880 MHz

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.536$ mho/m; $\epsilon_r = 52.98$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3736; ConvF(7.14, 7.14, 7.14); Calibrated: 4/26/2012;
- Sensor-Surface: 4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE4 Sn852; Calibrated: 11/16/2011
- Phantom: SAM4; Type: SAM; Serial: TP-1620
- DASY52 52.8.1(838); SEMCAD X 14.6.5(6469)

Configuration/Body/Area Scan (8x12x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 0.646 mW/g



Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 18.560 V/m; Power Drift = 0.03 dB

Peak SAR (extrapolated) = 1.311 mW/g

SAR(1 g) = 0.749 mW/g; SAR(10 g) = 0.385 mW/g

Maximum value of SAR (measured) = 0.862 mW/g

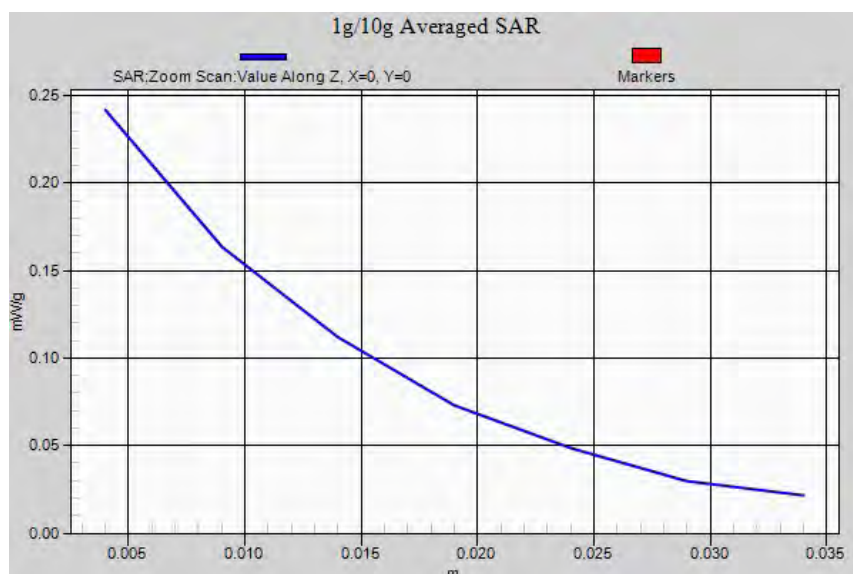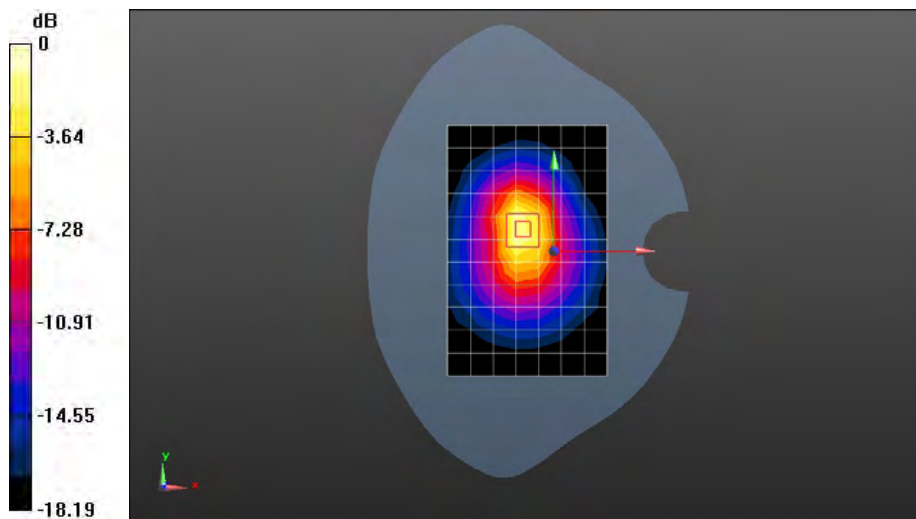

Test Laboratory: HUAWEI SAR Lab

U9510E GSM1900 EGPRS 1TS 661CH Bottom edge 10mm

DUT: U9510E; Type: HSPA+/HSUPA/HSDPA/UMTS/GSM/GPRS/EDGE Mobile Phone with Bluetooth; Serial: SAR1

Communication System: HW-GSM\GPRS\EGPRS-1TS; Frequency: 1880 MHz

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.536$ mho/m; $\epsilon_r = 52.98$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3736; ConvF(7.14, 7.14, 7.14); Calibrated: 4/26/2012;
- Sensor-Surface: 4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE4 Sn852; Calibrated: 11/16/2011
- Phantom: SAM4; Type: SAM; Serial: TP-1620
- DASY52 52.8.1(838); SEMCAD X 14.6.5(6469)

Configuration/Body/Area Scan (8x12x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 0.637 mW/g


Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 17.917 V/m; Power Drift = 0.10 dB

Peak SAR (extrapolated) = 1.082 mW/g

SAR(1 g) = 0.621 mW/g; SAR(10 g) = 0.318 mW/g

Maximum value of SAR (measured) = 0.712 mW/g

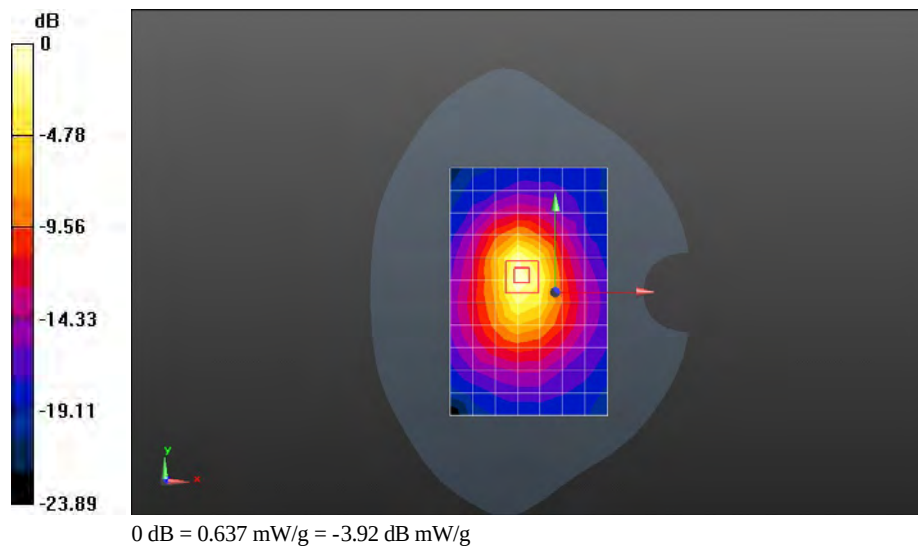

Test Laboratory: HUAWEI SAR Lab

U9510E GSM1900 EGPRS 2TS 661CH Bottom edge 10mm

DUT: U9510E; Type: HSPA+/HSUPA/HSDPA/UMTS/GSM/GPRS/EDGE Mobile Phone with Bluetooth; Serial: SAR2

Communication System: HW-GSM\GPRS\EGPRS-2TS; Frequency: 1880 MHz

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.536$ mho/m; $\epsilon_r = 52.98$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3736; ConvF(7.14, 7.14, 7.14); Calibrated: 4/26/2012;
- Sensor-Surface: 4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE4 Sn852; Calibrated: 11/16/2011
- Phantom: SAM4; Type: SAM; Serial: TP-1620
- DASY52 52.8.1(838); SEMCAD X 14.6.5(6469)

Configuration/Body/Area Scan (8x12x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 0.805 mW/g


Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 19.181 V/m; Power Drift = 0.11 dB

Peak SAR (extrapolated) = 1.292 mW/g

SAR(1 g) = 0.741 mW/g; SAR(10 g) = 0.381 mW/g

Maximum value of SAR (measured) = 0.846 mW/g

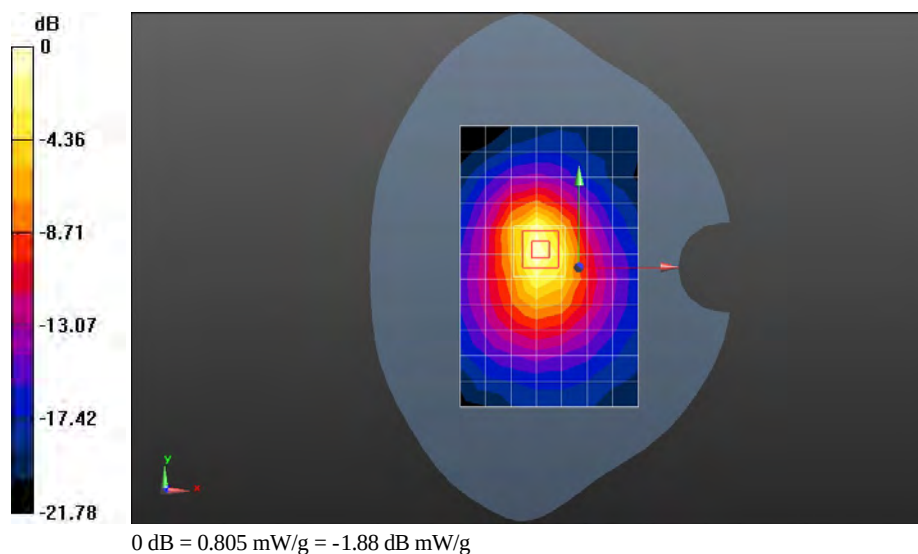

Test Laboratory: HUAWEI SAR Lab

U9510E GSM1900 661CH Towards Ground 10mm with Headset

DUT: U9510E; Type: HSPA+/HSUPA/HSDPA/UMTS/GSM/GPRS/EDGE Mobile Phone with Bluetooth; Serial: SAR1

Communication System: HW-GSM\GPRS\EGPRS-1TS; Frequency: 1880 MHz

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.536$ mho/m; $\epsilon_r = 52.98$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3736; ConvF(7.14, 7.14, 7.14); Calibrated: 4/26/2012;
- Sensor-Surface: 4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE4 Sn852; Calibrated: 11/16/2011
- Phantom: SAM4; Type: SAM; Serial: TP-1620
- DASY52 52.8.1(838); SEMCAD X 14.6.5(6469)

Configuration/Body/Area Scan (8x12x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 0.345 mW/g


Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 10.049 V/m; Power Drift = 0.07 dB

Peak SAR (extrapolated) = 0.562 mW/g

SAR(1 g) = 0.335 mW/g; SAR(10 g) = 0.197 mW/g

Maximum value of SAR (measured) = 0.369 mW/g

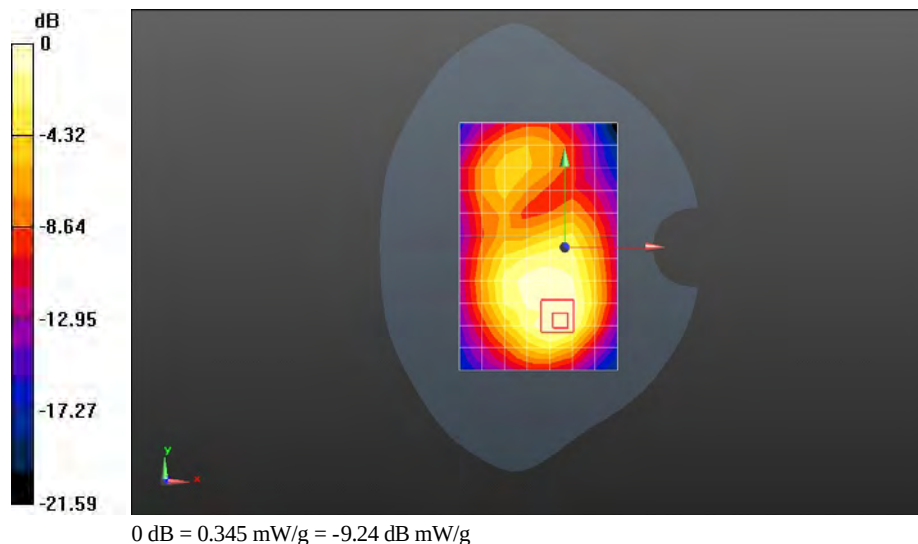

Test Laboratory: HUAWEI SAR Lab

U9510E WCDMA850 4182CH Left hand touch cheek

DUT: U9510E; Type: HSPA+/HSUPA/HSDPA/UMTS/GSM/GPRS/EDGE Mobile Phone with Bluetooth; Serial: SAR1

Communication System: HW-UMTS-FDD(WCDMA); Frequency: 836.4 MHz

Medium parameters used (interpolated): $f = 836.4$ MHz; $\sigma = 0.922$ mho/m; $\epsilon_r = 41.524$; $\rho = 1000$ kg/m³

Phantom section: Left Section

DASY Configuration:

- Probe: EX3DV4 - SN3736; ConvF(9.01, 9.01, 9.01); Calibrated: 4/26/2012;
- Sensor-Surface: 4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE4 Sn852; Calibrated: 11/16/2011
- Phantom: SAM4; Type: SAM; Serial: TP-1620
- DASY52 52.8.1(838); SEMCAD X 14.6.5(6469)

Configuration/Head/Area Scan (8x12x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.359 mW/g

Configuration/Head/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm


Reference Value = 7.299 V/m; Power Drift = -0.05 dB

Peak SAR (extrapolated) = 0.449 mW/g

SAR(1 g) = 0.349 mW/g; SAR(10 g) = 0.260 mW/g

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.369 mW/g

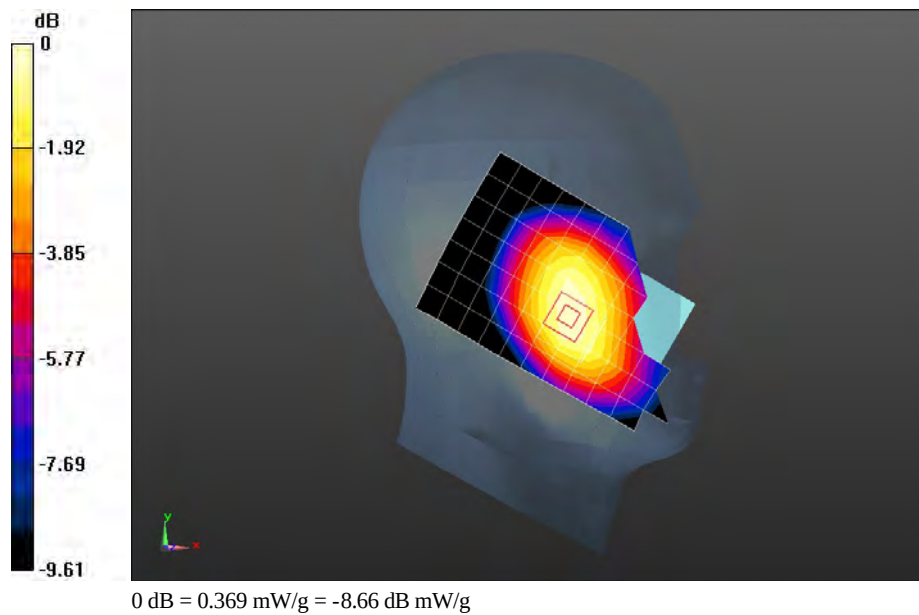

Test Laboratory: HUAWEI SAR Lab

U9510E WCDMA850 4182CH Left hand tilt 15 degree

DUT: U9510E; Type: HSPA+/HSUPA/HSDPA/UMTS/GSM/GPRS/EDGE Mobile Phone with Bluetooth; Serial: SAR1

Communication System: HW-UMTS-FDD(WCDMA); Frequency: 836.4 MHz

Medium parameters used (interpolated): $f = 836.4$ MHz; $\sigma = 0.922$ mho/m; $\epsilon_r = 41.524$; $\rho = 1000$ kg/m³

Phantom section: Left Section

DASY Configuration:

- Probe: EX3DV4 - SN3736; ConvF(9.01, 9.01, 9.01); Calibrated: 4/26/2012;
- Sensor-Surface: 4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE4 Sn852; Calibrated: 11/16/2011
- Phantom: SAM4; Type: SAM; Serial: TP-1620
- DASY52 52.8.1(838); SEMCAD X 14.6.5(6469)

Configuration/Head/Area Scan (8x12x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.254 mW/g

Configuration/Head/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm


Reference Value = 11.735 V/m; Power Drift = -0.06 dB

Peak SAR (extrapolated) = 0.301 mW/g

SAR(1 g) = 0.247 mW/g; SAR(10 g) = 0.191 mW/g

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.259 mW/g

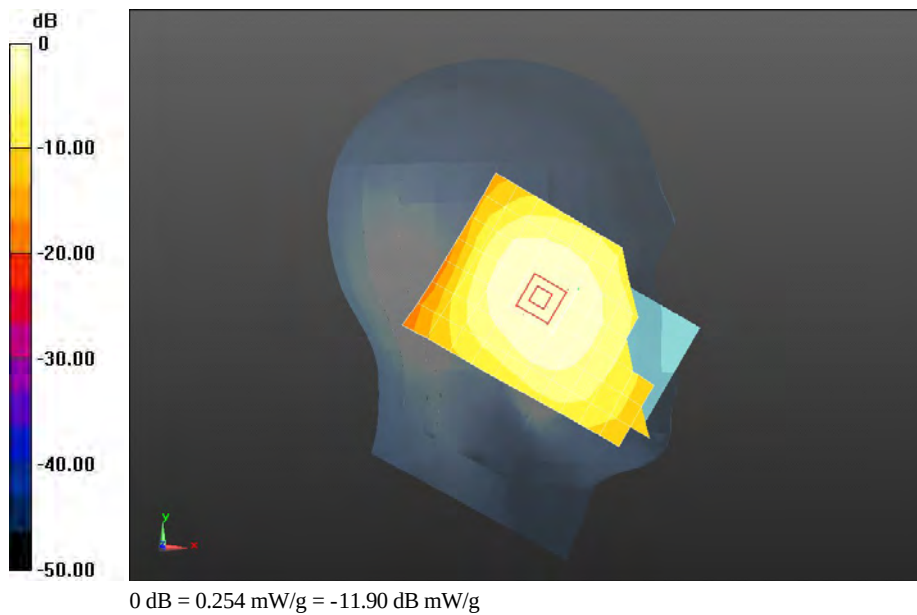

Test Laboratory: HUAWEI SAR Lab

U9510E WCDMA850 4182CH Right hand touch cheek

DUT: U9510E; Type: HSPA+/HSUPA/HSDPA/UMTS/GSM/GPRS/EDGE Mobile Phone with Bluetooth; Serial: SAR1

Communication System: HW-UMTS-FDD(WCDMA); Frequency: 836.4 MHz

Medium parameters used (interpolated): $f = 836.4$ MHz; $\sigma = 0.922$ mho/m; $\epsilon_r = 41.524$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY Configuration:

- Probe: EX3DV4 - SN3736; ConvF(9.01, 9.01, 9.01); Calibrated: 4/26/2012;
- Sensor-Surface: 4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE4 Sn852; Calibrated: 11/16/2011
- Phantom: SAM4; Type: SAM; Serial: TP-1620
- DASY52 52.8.1(838); SEMCAD X 14.6.5(6469)

Configuration/Head/Area Scan (8x12x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.414 mW/g

Configuration/Head/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm



Reference Value = 8.505 V/m; Power Drift = 0.11 dB

Peak SAR (extrapolated) = 0.496 mW/g

SAR(1 g) = 0.404 mW/g; SAR(10 g) = 0.310 mW/g

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.424 mW/g

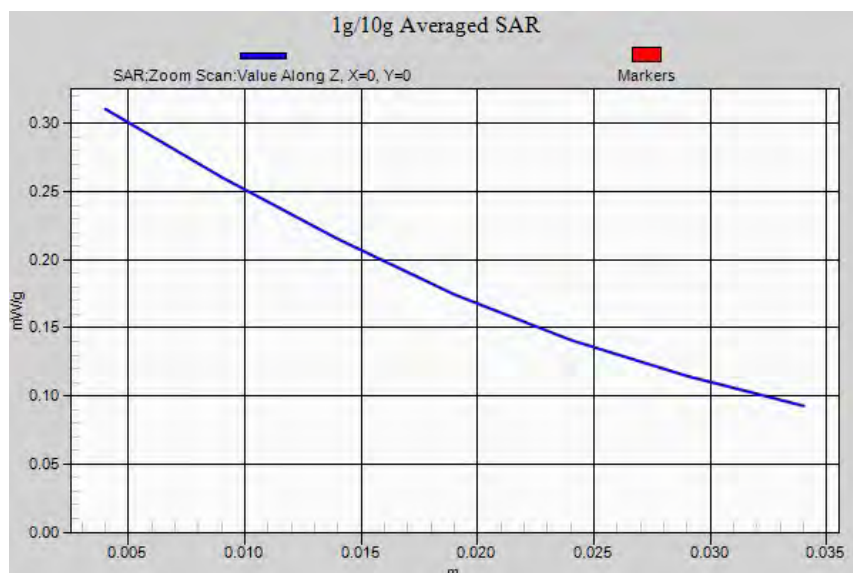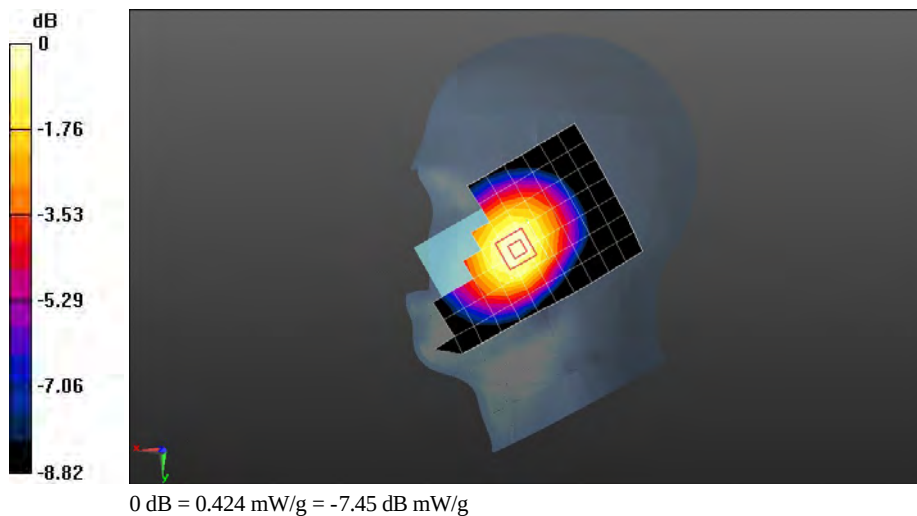

Test Laboratory: HUAWEI SAR Lab

U9510E WCDMA850 4182CH Right hand tilt 15 degree

DUT: U9510E; Type: HSPA+/HSUPA/HSDPA/UMTS/GSM/GPRS/EDGE Mobile Phone with Bluetooth; Serial: SAR1

Communication System: HW-UMTS-FDD(WCDMA); Frequency: 836.4 MHz

Medium parameters used (interpolated): $f = 836.4$ MHz; $\sigma = 0.922$ mho/m; $\epsilon_r = 41.524$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY Configuration:

- Probe: EX3DV4 - SN3736; ConvF(9.01, 9.01, 9.01); Calibrated: 4/26/2012;
- Sensor-Surface: 4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE4 Sn852; Calibrated: 11/16/2011
- Phantom: SAM4; Type: SAM; Serial: TP-1620
- DASY52 52.8.1(838); SEMCAD X 14.6.5(6469)

Configuration/Head/Area Scan (8x12x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.294 mW/g

Configuration/Head/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm


Reference Value = 13.210 V/m; Power Drift = -0.03 dB

Peak SAR (extrapolated) = 0.359 mW/g

SAR(1 g) = 0.292 mW/g; SAR(10 g) = 0.225 mW/g

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.305 mW/g

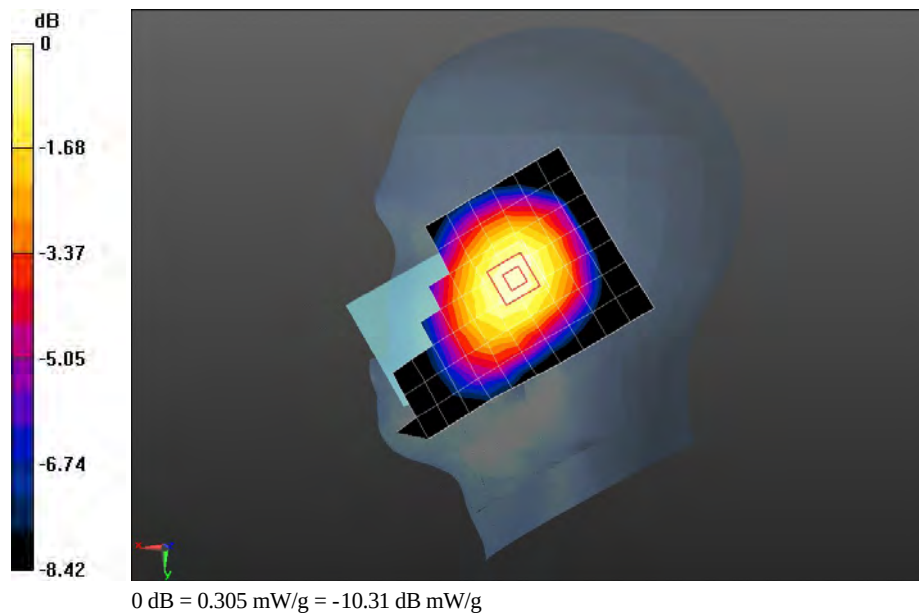

Test Laboratory: HUAWEI SAR Lab

U9510E WCDMA850 4182CH Towards Phantom 10mm

DUT: U9510E; Type: HSPA+/HSUPA/HSDPA/UMTS/GSM/GPRS/EDGE Mobile Phone with Bluetooth; Serial: SAR1

Communication System: HW-UMTS-FDD(WCDMA); Frequency: 836.4 MHz

Medium parameters used (interpolated): $f = 836.4$ MHz; $\sigma = 0.993$ mho/m; $\epsilon_r = 56.502$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3736; ConvF(8.98, 8.98, 8.98); Calibrated: 4/26/2012;
- Sensor-Surface: 4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE4 Sn852; Calibrated: 11/16/2011
- Phantom: SAM3; Type: SAM; Serial: TP-1597
- DASY52 52.8.1(838); SEMCAD X 14.6.5(6469)

Configuration/Body/Area Scan (8x12x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.522 mW/g

Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm


Reference Value = 22.410 V/m; Power Drift = 0.00 dB

Peak SAR (extrapolated) = 0.640 mW/g

SAR(1 g) = 0.511 mW/g; SAR(10 g) = 0.395 mW/g

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.534 mW/g

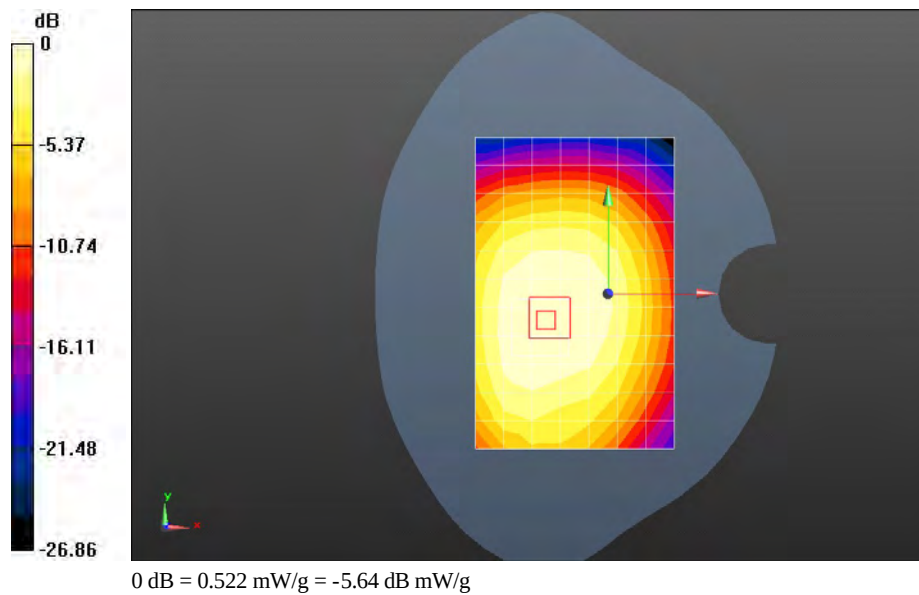

Test Laboratory: HUAWEI SAR Lab

U9510E WCDMA850 4182CH Towards Ground 10mm**DUT: U9510E; Type: HSPA+/HSUPA/HSDPA/UMTS/GSM/GPRS/EDGE Mobile Phone with Bluetooth; Serial: SAR1**

Communication System: HW-UMTS-FDD(WCDMA); Frequency: 836.4 MHz

Medium parameters used (interpolated): $f = 836.4$ MHz; $\sigma = 0.993$ mho/m; $\epsilon_r = 56.502$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3736; ConvF(8.98, 8.98, 8.98); Calibrated: 4/26/2012;
- Sensor-Surface: 4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE4 Sn852; Calibrated: 11/16/2011
- Phantom: SAM3; Type: SAM; Serial: TP-1597
- DASY52 52.8.1(838); SEMCAD X 14.6.5(6469)

Configuration/Body/Area Scan (8x12x1): Measurement grid: dx=15mm, dy=15mm[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.818 mW/g


Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 25.810 V/m; Power Drift = 0.10 dB

Peak SAR (extrapolated) = 1.018 mW/g

SAR(1 g) = 0.793 mW/g; SAR(10 g) = 0.593 mW/g[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.834 mW/g

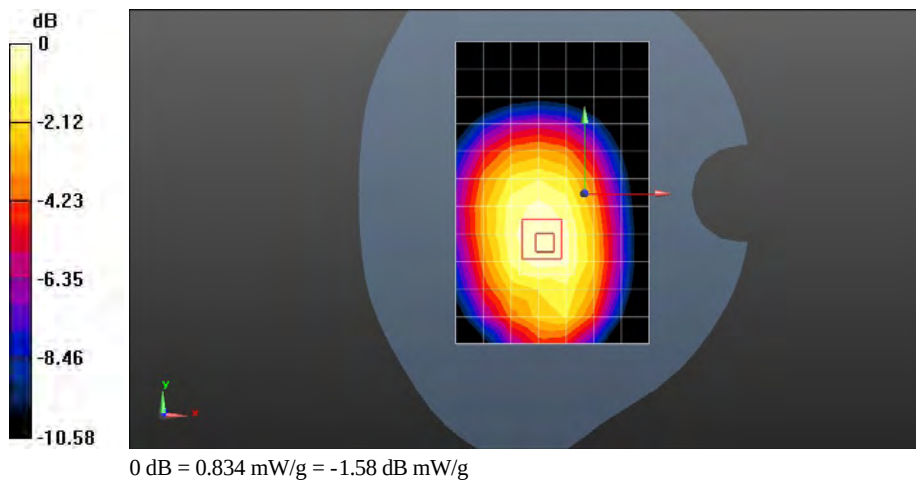

Test Laboratory: HUAWEI SAR Lab

U9510E WCDMA850 4182CH Left edge 10mm

DUT: U9510E; Type: HSPA+/HSUPA/HSDPA/UMTS/GSM/GPRS/EDGE Mobile Phone with Bluetooth; Serial: SAR1

Communication System: HW-UMTS-FDD(WCDMA); Frequency: 836.4 MHz

Medium parameters used (interpolated): $f = 836.4$ MHz; $\sigma = 0.993$ mho/m; $\epsilon_r = 56.502$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3736; ConvF(8.98, 8.98, 8.98); Calibrated: 4/26/2012;
- Sensor-Surface: 4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE4 Sn852; Calibrated: 11/16/2011
- Phantom: SAM3; Type: SAM; Serial: TP-1597
- DASY52 52.8.1(838); SEMCAD X 14.6.5(6469)

Configuration/Body/Area Scan (8x12x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.616 mW/g

Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm


Reference Value = 23.965 V/m; Power Drift = 0.04 dB

Peak SAR (extrapolated) = 0.823 mW/g

SAR(1 g) = 0.583 mW/g; SAR(10 g) = 0.399 mW/g

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.623 mW/g

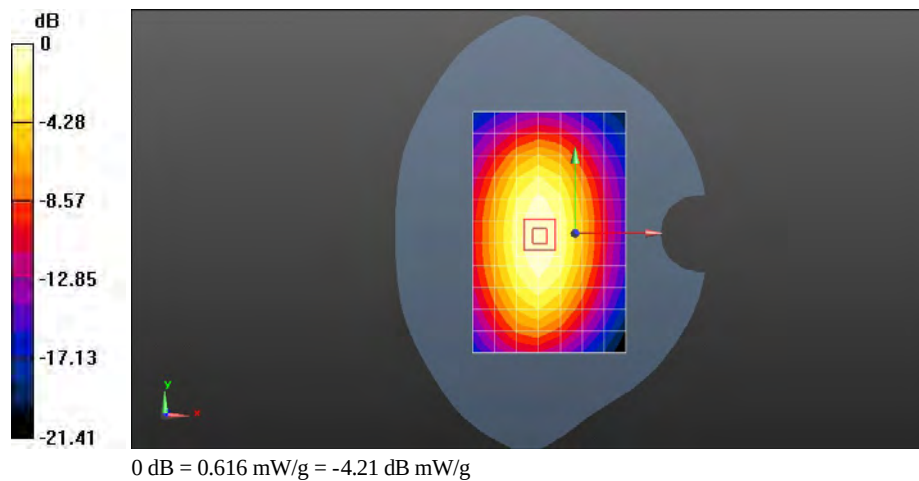

Test Laboratory: HUAWEI SAR Lab

U9510E WCDMA850 4182CH Right edge 10mm

DUT: U9510E; Type: HSPA+/HSUPA/HSDPA/UMTS/GSM/GPRS/EDGE Mobile Phone with Bluetooth; Serial: SAR1

Communication System: HW-UMTS-FDD(WCDMA); Frequency: 836.4 MHz

Medium parameters used (interpolated): $f = 836.4$ MHz; $\sigma = 0.993$ mho/m; $\epsilon_r = 56.502$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3736; ConvF(8.98, 8.98, 8.98); Calibrated: 4/26/2012;
- Sensor-Surface: 4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE4 Sn852; Calibrated: 11/16/2011
- Phantom: SAM3; Type: SAM; Serial: TP-1597
- DASY52 52.8.1(838); SEMCAD X 14.6.5(6469)

Configuration/Body/Area Scan (8x12x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.684 mW/g

Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm


Reference Value = 23.906 V/m; Power Drift = 0.06 dB

Peak SAR (extrapolated) = 0.908 mW/g

SAR(1 g) = 0.645 mW/g; SAR(10 g) = 0.444 mW/g

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.689 mW/g

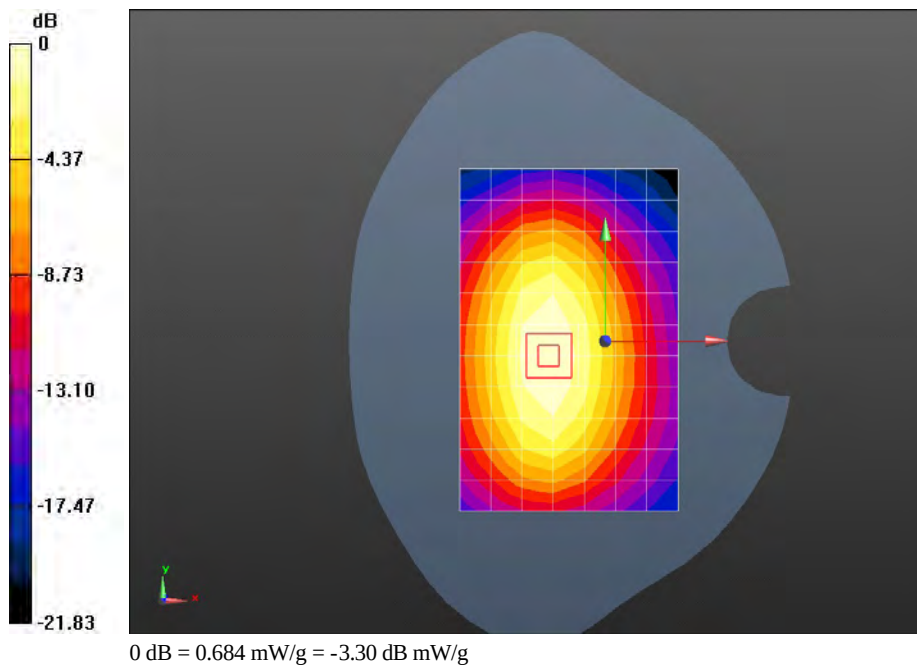

Test Laboratory: HUAWEI SAR Lab

U9510E WCDMA850 4182CH Bottom edge 10mm

DUT: U9510E; Type: HSPA+/HSUPA/HSDPA/UMTS/GSM/GPRS/EDGE Mobile Phone with Bluetooth; Serial: SAR1

Communication System: HW-UMTS-FDD(WCDMA); Frequency: 836.4 MHz

Medium parameters used (interpolated): $f = 836.4$ MHz; $\sigma = 0.993$ mho/m; $\epsilon_r = 56.502$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3736; ConvF(8.98, 8.98, 8.98); Calibrated: 4/26/2012;
- Sensor-Surface: 4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE4 Sn852; Calibrated: 11/16/2011
- Phantom: SAM3; Type: SAM; Serial: TP-1597
- DASY52 52.8.1(838); SEMCAD X 14.6.5(6469)

Configuration/Body/Area Scan (8x12x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.149 mW/g

Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm


Reference Value = 4.999 V/m; Power Drift = -0.13 dB

Peak SAR (extrapolated) = 0.236 mW/g

SAR(1 g) = 0.138 mW/g; SAR(10 g) = 0.078 mW/g

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.154 mW/g

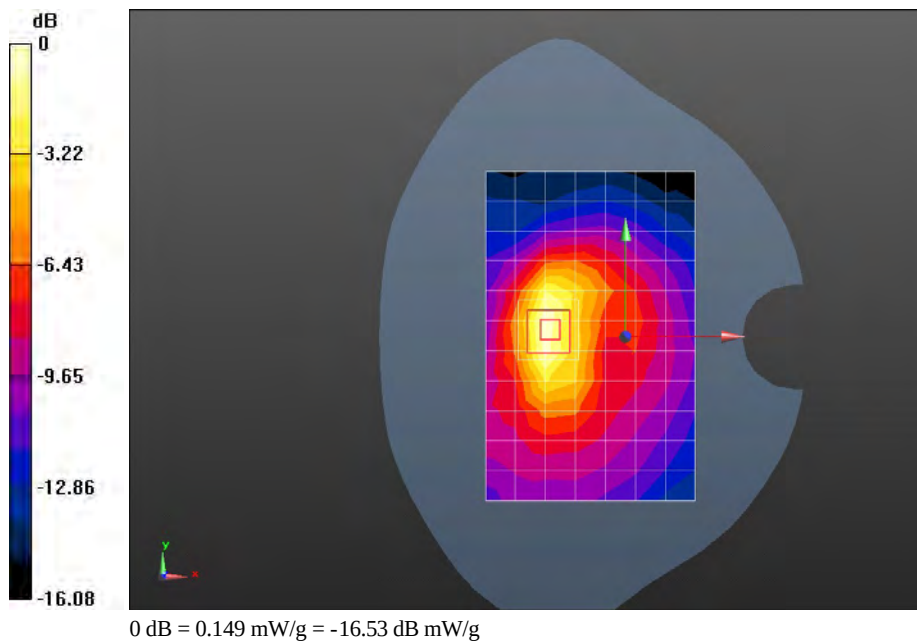

Test Laboratory: HUAWEI SAR Lab

U9510E WCDMA850 4182CH Towards Ground 10mm with Headset

DUT: U9510E; Type: HSPA+/HSUPA/HSDPA/UMTS/GSM/GPRS/EDGE Mobile Phone with Bluetooth; Serial: SAR1

Communication System: HW-UMTS-FDD(WCDMA); Frequency: 836.4 MHz

Medium parameters used (interpolated): $f = 836.4$ MHz; $\sigma = 0.993$ mho/m; $\epsilon_r = 56.502$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3736; ConvF(8.98, 8.98, 8.98); Calibrated: 4/26/2012;
- Sensor-Surface: 4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE4 Sn852; Calibrated: 11/16/2011
- Phantom: SAM3; Type: SAM; Serial: TP-1597
- DASY52 52.8.1(838); SEMCAD X 14.6.5(6469)

Configuration/Body/Area Scan (8x12x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.566 mW/g

Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm


Reference Value = 21.174 V/m; Power Drift = 0.03 dB

Peak SAR (extrapolated) = 0.739 mW/g

SAR(1 g) = 0.557 mW/g; SAR(10 g) = 0.410 mW/g

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.589 mW/g

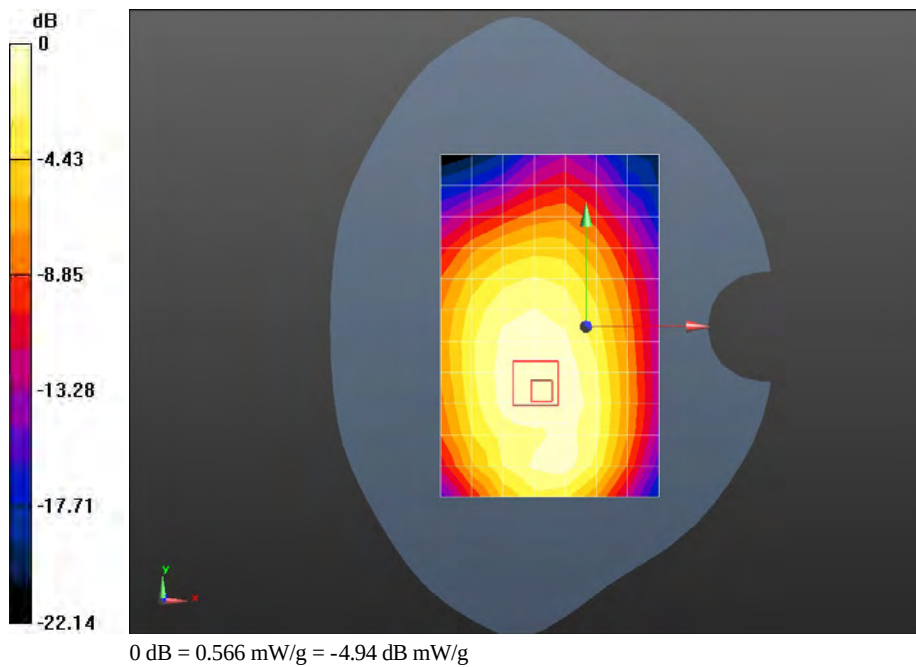

Test Laboratory: HUAWEI SAR Lab

U9510E WCDMA1700 1413CH Left hand touch cheek**DUT: U9510E; Type: HSPA+/HSUPA/HSDPA/UMTS/GSM/GPRS/EDGE Mobile Phone with Bluetooth; Serial: SAR1**

Communication System: HW-UMTS-FDD(WCDMA); Frequency: 1732.6 MHz

Medium parameters used: $f = 1733$ MHz; $\sigma = 1.421$ mho/m; $\epsilon_r = 40.653$; $\rho = 1000$ kg/m³

Phantom section: Left Section

DASY Configuration:

- Probe: EX3DV4 - SN3736; ConvF(7.94, 7.94, 7.94); Calibrated: 4/26/2012;
- Sensor-Surface: 4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE4 Sn852; Calibrated: 11/16/2011
- Phantom: SAM3; Type: SAM; Serial: TP-1597
- DASY52 52.8.1(838); SEMCAD X 14.6.5(6469)

Configuration/Head/Area Scan (8x12x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 0.539 mW/g



Configuration/Head/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 10.106 V/m; Power Drift = 0.14 dB

Peak SAR (extrapolated) = 0.940 mW/g

SAR(1 g) = 0.586 mW/g; SAR(10 g) = 0.351 mW/g

Maximum value of SAR (measured) = 0.639 mW/g

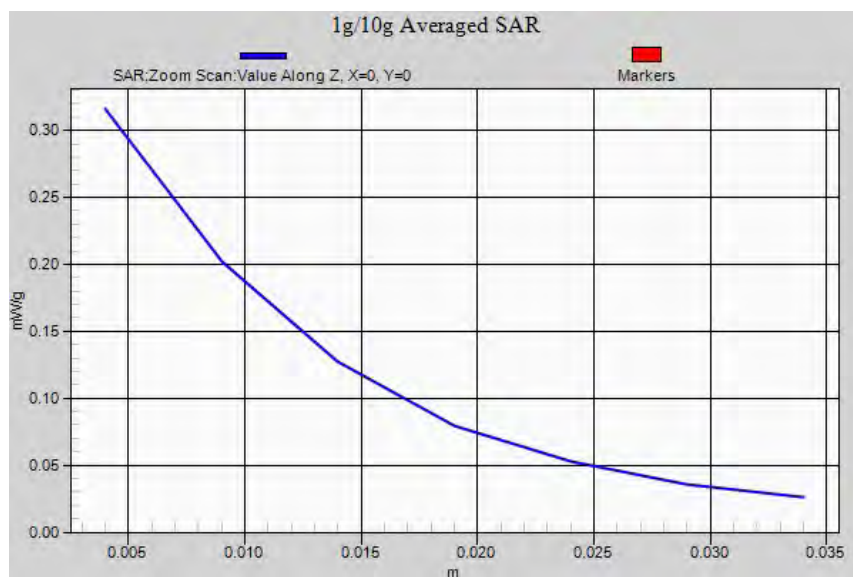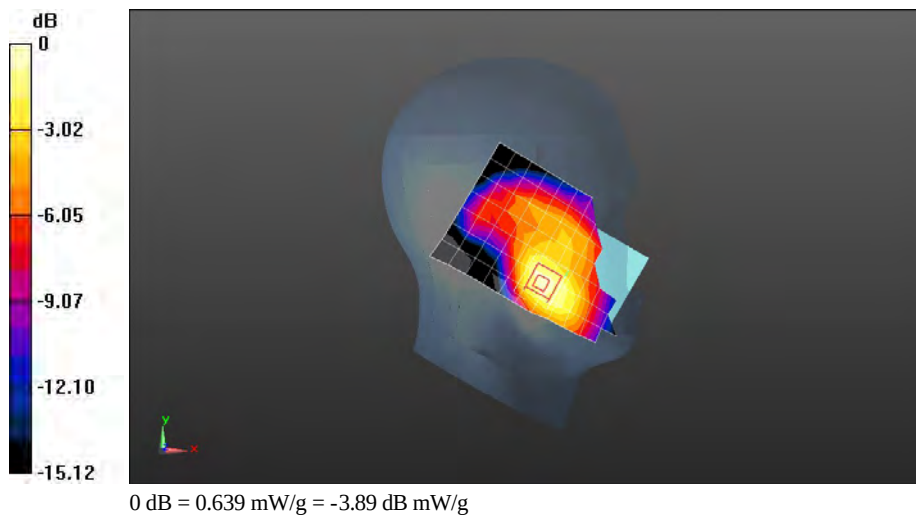

Test Laboratory: HUAWEI SAR Lab

U9510E WCDMA1700 1413CH Left hand tilt 15 degree

DUT: U9510E; Type: HSPA+/HSUPA/HSDPA/UMTS/GSM/GPRS/EDGE Mobile Phone with Bluetooth; Serial: SAR1

Communication System: HW-UMTS-FDD(WCDMA); Frequency: 1732.6 MHz

Medium parameters used: $f = 1733$ MHz; $\sigma = 1.421$ mho/m; $\epsilon_r = 40.653$; $\rho = 1000$ kg/m³

Phantom section: Left Section

DASY Configuration:

- Probe: EX3DV4 - SN3736; ConvF(7.94, 7.94, 7.94); Calibrated: 4/26/2012;
- Sensor-Surface: 4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE4 Sn852; Calibrated: 11/16/2011
- Phantom: SAM3; Type: SAM; Serial: TP-1597
- DASY52 52.8.1(838); SEMCAD X 14.6.5(6469)

Configuration/Head/Area Scan (8x12x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 0.296 mW/g


Configuration/Head/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 13.913 V/m; Power Drift = 0.13 dB

Peak SAR (extrapolated) = 0.495 mW/g

SAR(1 g) = 0.294 mW/g; SAR(10 g) = 0.172 mW/g

Maximum value of SAR (measured) = 0.327 mW/g

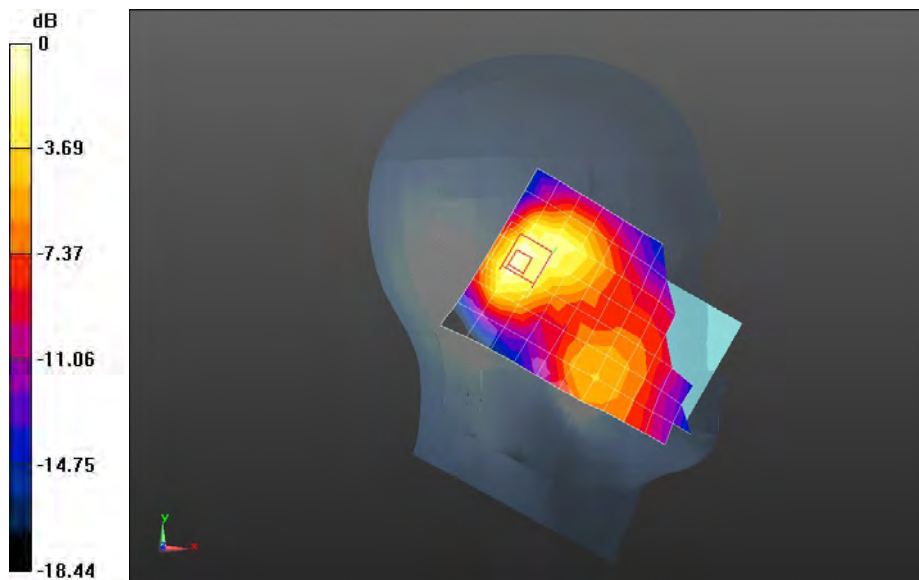

0 dB = 0.327 mW/g = -9.71 dB mW/g

Test Laboratory: HUAWEI SAR Lab

U9510E WCDMA1700 1413CH Right hand touch cheek

DUT: U9510E; Type: HSPA+/HSUPA/HSDPA/UMTS/GSM/GPRS/EDGE Mobile Phone with Bluetooth; Serial: SAR1

Communication System: HW-UMTS-FDD(WCDMA); Frequency: 1732.6 MHz

Medium parameters used: $f = 1733$ MHz; $\sigma = 1.421$ mho/m; $\epsilon_r = 40.653$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY Configuration:

- Probe: EX3DV4 - SN3736; ConvF(7.94, 7.94, 7.94); Calibrated: 4/26/2012;
- Sensor-Surface: 4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE4 Sn852; Calibrated: 11/16/2011
- Phantom: SAM3; Type: SAM; Serial: TP-1597
- DASY52 52.8.1(838); SEMCAD X 14.6.5(6469)

Configuration/Head/Area Scan (8x12x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 0.506 mW/g


Configuration/Head/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 11.016 V/m; Power Drift = 0.19 dB

Peak SAR (extrapolated) = 0.749 mW/g

SAR(1 g) = 0.510 mW/g; SAR(10 g) = 0.324 mW/g

Maximum value of SAR (measured) = 0.554 mW/g

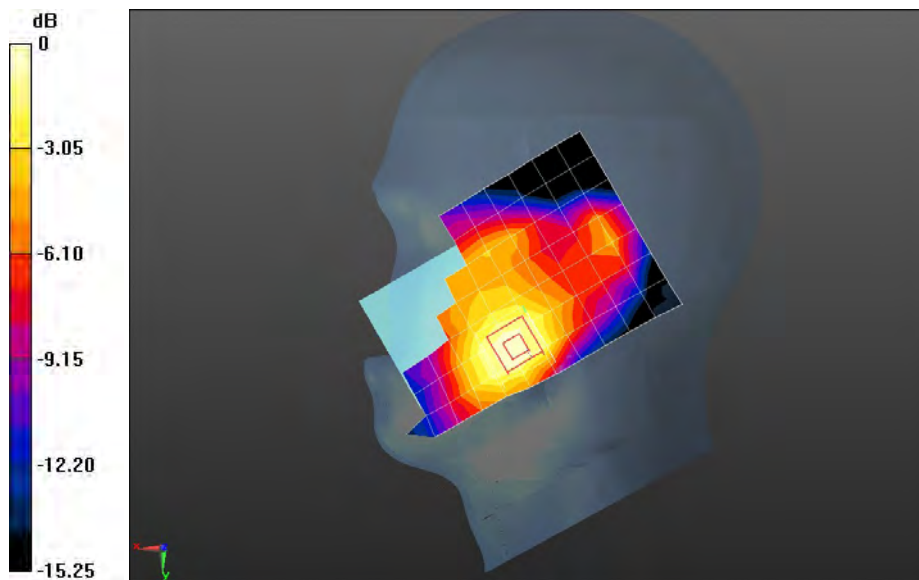

Test Laboratory: HUAWEI SAR Lab

U9510E WCDMA1700 1413CH Right hand tilt 15 degree

DUT: U9510E; Type: HSPA+/HSUPA/HSDPA/UMTS/GSM/GPRS/EDGE Mobile Phone with Bluetooth; Serial: SAR1

Communication System: HW-UMTS-FDD(WCDMA); Frequency: 1732.6 MHz

Medium parameters used: $f = 1733$ MHz; $\sigma = 1.421$ mho/m; $\epsilon_r = 40.653$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY Configuration:

- Probe: EX3DV4 - SN3736; ConvF(7.94, 7.94, 7.94); Calibrated: 4/26/2012;
- Sensor-Surface: 4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE4 Sn852; Calibrated: 11/16/2011
- Phantom: SAM3; Type: SAM; Serial: TP-1597
- DASY52 52.8.1(838); SEMCAD X 14.6.5(6469)

Configuration/Head/Area Scan (8x12x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 0.332 mW/g


Configuration/Head/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 13.495 V/m; Power Drift = -0.12 dB

Peak SAR (extrapolated) = 0.521 mW/g

SAR(1 g) = 0.304 mW/g; SAR(10 g) = 0.169 mW/g

Maximum value of SAR (measured) = 0.335 mW/g

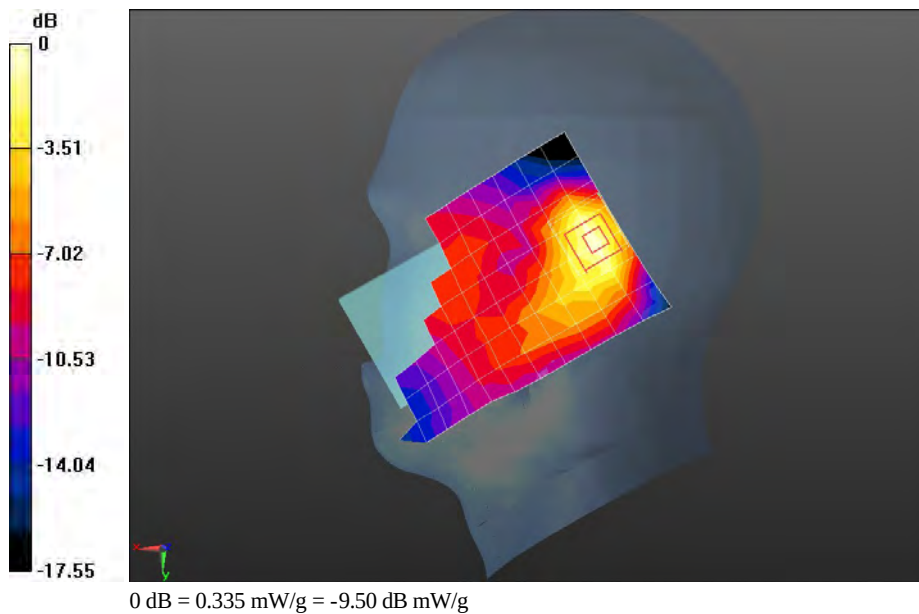

Test Laboratory: HUAWEI SAR Lab

U9510E WCDMA1700 1413CH Towards Phantom 10mm

DUT: U9510E; Type: HSPA+/HSUPA/HSDPA/UMTS/GSM/GPRS/EDGE Mobile Phone with Bluetooth; Serial: SAR1

Communication System: HW-UMTS-FDD(WCDMA); Frequency: 1732.6 MHz

Medium parameters used: $f = 1733$ MHz; $\sigma = 1.487$ mho/m; $\epsilon_r = 53.067$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3736; ConvF(7.43, 7.43, 7.43); Calibrated: 4/26/2012;
- Sensor-Surface: 4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE4 Sn852; Calibrated: 11/16/2011
- Phantom: SAM3; Type: SAM; Serial: TP-1597
- DASY52 52.8.1(838); SEMCAD X 14.6.5(6469)

Configuration/Body/Area Scan (8x12x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 0.776 mW/g


Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 11.095 V/m; Power Drift = 0.03 dB

Peak SAR (extrapolated) = 1.198 mW/g

SAR(1 g) = 0.724 mW/g; SAR(10 g) = 0.444 mW/g

Maximum value of SAR (measured) = 0.775 mW/g

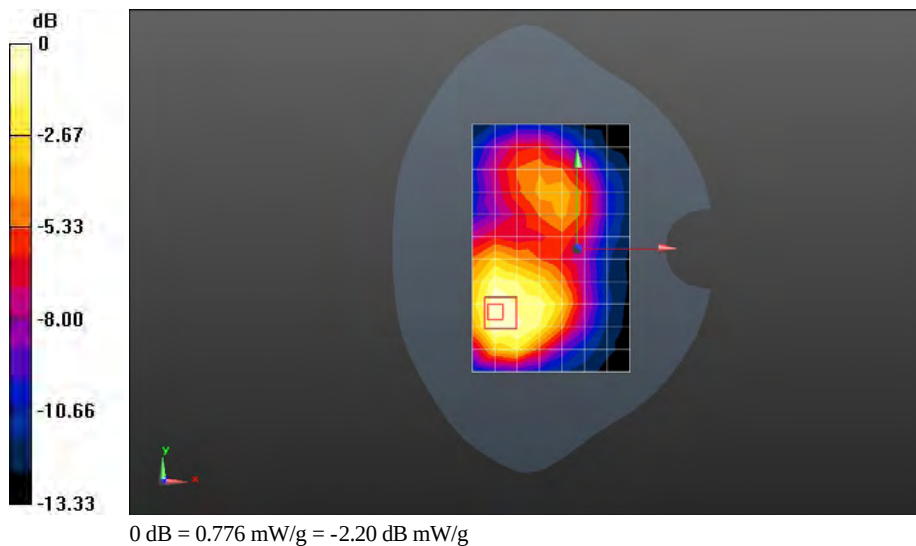

Test Laboratory: HUAWEI SAR Lab

U9510E WCDMA1700 1513CH Towards Ground 10mm

DUT: U9510E; Type: HSPA+/HSUPA/HSDPA/UMTS/GSM/GPRS/EDGE Mobile Phone with Bluetooth; Serial: SAR1

Communication System: HW-UMTS-FDD(WCDMA); Frequency: 1752.6 MHz

Medium parameters used: $f = 1753$ MHz; $\sigma = 1.498$ mho/m; $\epsilon_r = 53.118$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3736; ConvF(7.43, 7.43, 7.43); Calibrated: 4/26/2012;
- Sensor-Surface: 4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE4 Sn852; Calibrated: 11/16/2011
- Phantom: SAM3; Type: SAM; Serial: TP-1597
- DASY52 52.8.1(838); SEMCAD X 14.6.5(6469)

Configuration/Body/Area Scan (8x12x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 0.937 mW/g


Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 14.677 V/m; Power Drift = 0.05 dB

Peak SAR (extrapolated) = 1.438 mW/g

SAR(1 g) = 0.862 mW/g; SAR(10 g) = 0.510 mW/g

Maximum value of SAR (measured) = 0.934 mW/g

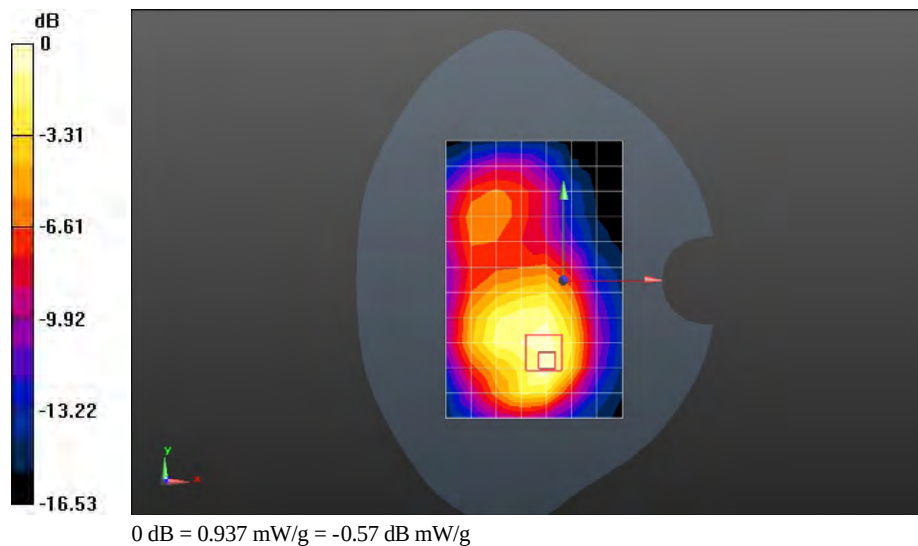

Test Laboratory: HUAWEI SAR Lab

U9510E WCDMA1700 1413CH Towards Ground 10mm

DUT: U9510E; Type: HSPA+/HSUPA/HSDPA/UMTS/GSM/GPRS/EDGE Mobile Phone with Bluetooth; Serial: SAR1

Communication System: HW-UMTS-FDD(WCDMA); Frequency: 1732.6 MHz

Medium parameters used: $f = 1733$ MHz; $\sigma = 1.487$ mho/m; $\epsilon_r = 53.067$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3736; ConvF(7.43, 7.43, 7.43); Calibrated: 4/26/2012;
- Sensor-Surface: 4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE4 Sn852; Calibrated: 11/16/2011
- Phantom: SAM3; Type: SAM; Serial: TP-1597
- DASY52 52.8.1(838); SEMCAD X 14.6.5(6469)

Configuration/Body/Area Scan (8x12x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 0.894 mW/g


Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 14.334 V/m; Power Drift = 0.00 dB

Peak SAR (extrapolated) = 1.380 mW/g

SAR(1 g) = 0.833 mW/g; SAR(10 g) = 0.494 mW/g

Maximum value of SAR (measured) = 0.916 mW/g

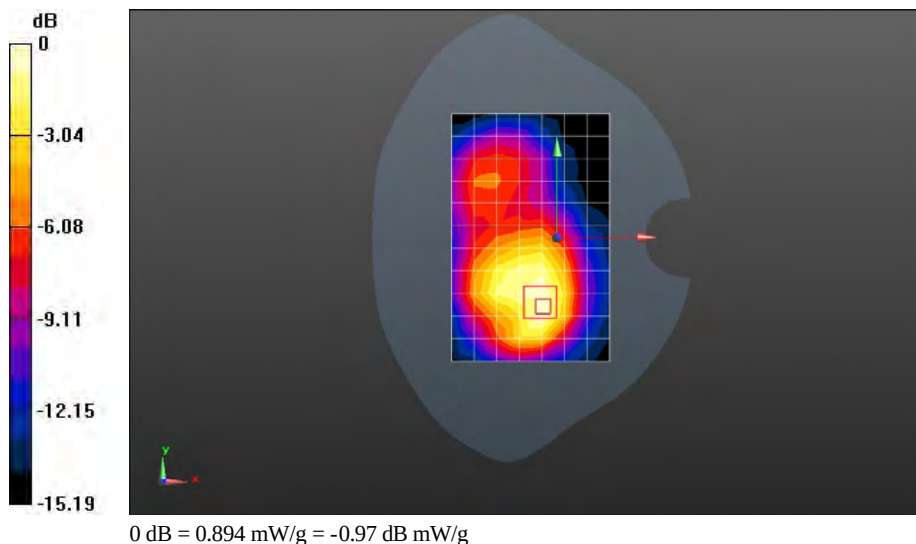

Test Laboratory: HUAWEI SAR Lab

U9510E WCDMA1700 1312CH Towards Ground 10mm

DUT: U9510E; Type: HSPA+/HSUPA/HSDPA/UMTS/GSM/GPRS/EDGE Mobile Phone with Bluetooth; Serial: SAR1

Communication System: HW-UMTS-FDD(WCDMA); Frequency: 1712.4 MHz

Medium parameters used (interpolated): $f = 1712.4$ MHz; $\sigma = 1.446$ mho/m; $\epsilon_r = 53.063$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3736; ConvF(7.43, 7.43, 7.43); Calibrated: 4/26/2012;
- Sensor-Surface: 4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE4 Sn852; Calibrated: 11/16/2011
- Phantom: SAM3; Type: SAM; Serial: TP-1597
- DASY52 52.8.1(838); SEMCAD X 14.6.5(6469)

Configuration/Body/Area Scan (8x12x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.910 mW/g

Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm


Reference Value = 14.607 V/m; Power Drift = 0.12 dB

Peak SAR (extrapolated) = 1.413 mW/g

SAR(1 g) = 0.864 mW/g; SAR(10 g) = 0.517 mW/g

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.946 mW/g

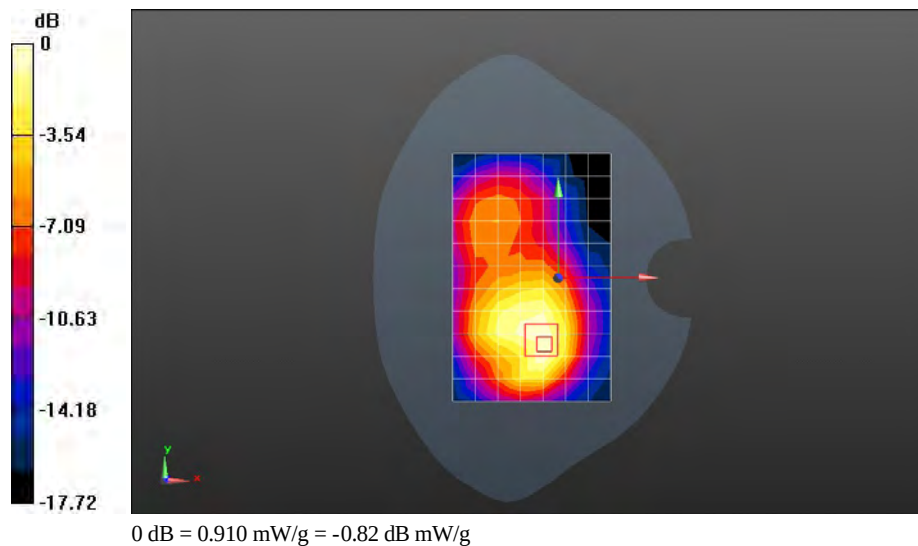

Test Laboratory: HUAWEI SAR Lab

U9510E WCDMA1700 1413CH Left edge 10mm

DUT: U9510E; Type: HSPA+/HSUPA/HSDPA/UMTS/GSM/GPRS/EDGE Mobile Phone with Bluetooth; Serial: SAR1

Communication System: HW-UMTS-FDD(WCDMA); Frequency: 1732.6 MHz

Medium parameters used: $f = 1733$ MHz; $\sigma = 1.487$ mho/m; $\epsilon_r = 53.067$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3736; ConvF(7.43, 7.43, 7.43); Calibrated: 4/26/2012;
- Sensor-Surface: 4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE4 Sn852; Calibrated: 11/16/2011
- Phantom: SAM3; Type: SAM; Serial: TP-1597
- DASY52 52.8.1(838); SEMCAD X 14.6.5(6469)

Configuration/Body/Area Scan (8x12x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 0.400 mW/g


Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 11.153 V/m; Power Drift = 0.14 dB

Peak SAR (extrapolated) = 0.580 mW/g

SAR(1 g) = 0.365 mW/g; SAR(10 g) = 0.218 mW/g

Maximum value of SAR (measured) = 0.398 mW/g

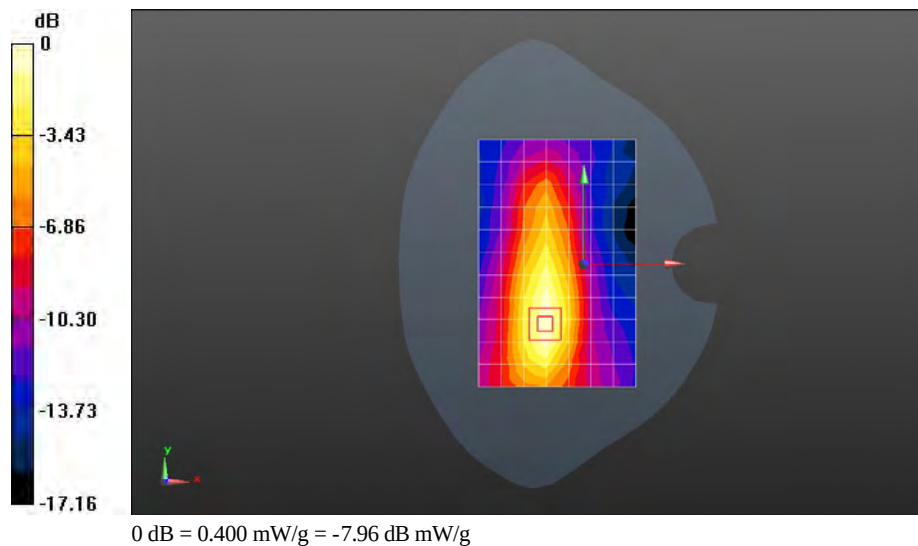

Test Laboratory: HUAWEI SAR Lab

U9510E WCDMA1700 1413CH Right edge 10mm

DUT: U9510E; Type: HSPA+/HSUPA/HSDPA/UMTS/GSM/GPRS/EDGE Mobile Phone with Bluetooth; Serial: SAR1

Communication System: HW-UMTS-FDD(WCDMA); Frequency: 1732.6 MHz

Medium parameters used: $f = 1733$ MHz; $\sigma = 1.487$ mho/m; $\epsilon_r = 53.067$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3736; ConvF(7.43, 7.43, 7.43); Calibrated: 4/26/2012;
- Sensor-Surface: 4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE4 Sn852; Calibrated: 11/16/2011
- Phantom: SAM3; Type: SAM; Serial: TP-1597
- DASY52 52.8.1(838); SEMCAD X 14.6.5(6469)

Configuration/Body/Area Scan (8x12x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 0.238 mW/g


Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 10.121 V/m; Power Drift = -0.19 dB

Peak SAR (extrapolated) = 0.332 mW/g

SAR(1 g) = 0.227 mW/g; SAR(10 g) = 0.158 mW/g

Maximum value of SAR (measured) = 0.244 mW/g

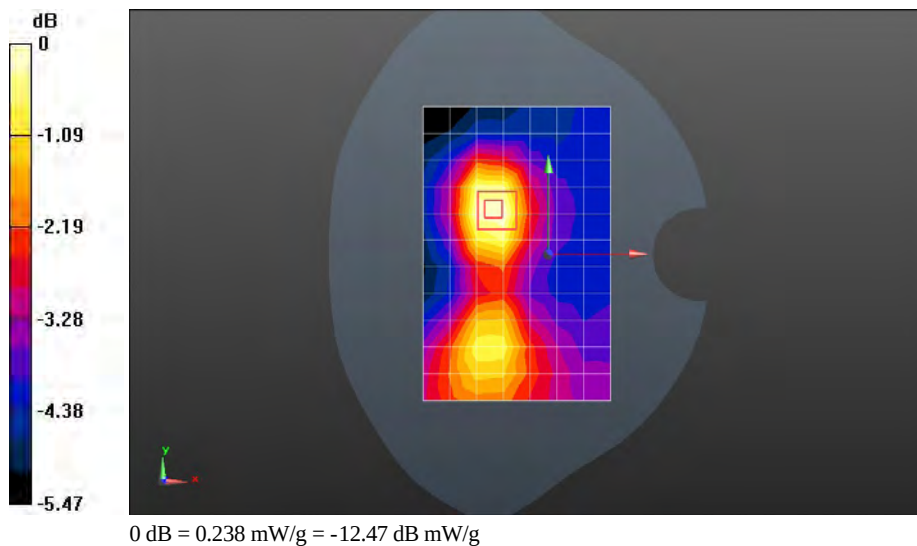

Test Laboratory: HUAWEI SAR Lab

U9510E WCDMA1700 1513CH Bottom edge 10mm**DUT: U9510E; Type: HSPA+/HSUPA/HSDPA/UMTS/GSM/GPRS/EDGE Mobile Phone with Bluetooth; Serial: SAR1**

Communication System: HW-UMTS-FDD(WCDMA); Frequency: 1752.6 MHz

Medium parameters used: $f = 1753$ MHz; $\sigma = 1.498$ mho/m; $\epsilon_r = 53.118$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3736; ConvF(7.43, 7.43, 7.43); Calibrated: 4/26/2012;
- Sensor-Surface: 4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE4 Sn852; Calibrated: 11/16/2011
- Phantom: SAM3; Type: SAM; Serial: TP-1597
- DASY52 52.8.1(838); SEMCAD X 14.6.5(6469)

Configuration/Body/Area Scan (8x12x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 1.27 mW/g



Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 22.730 V/m; Power Drift = 0.03 dB

Peak SAR (extrapolated) = 1.961 mW/g

SAR(1 g) = 1.12 mW/g; SAR(10 g) = 0.569 mW/g

Maximum value of SAR (measured) = 1.29 mW/g

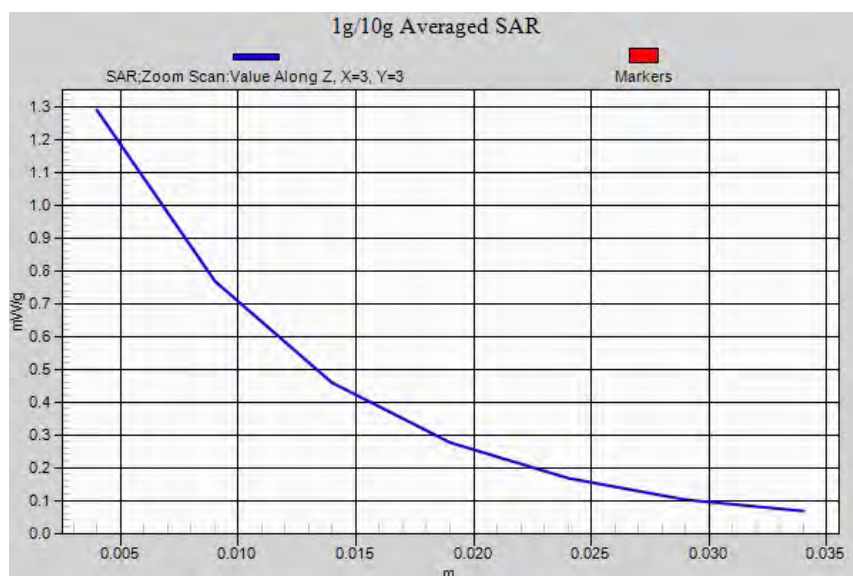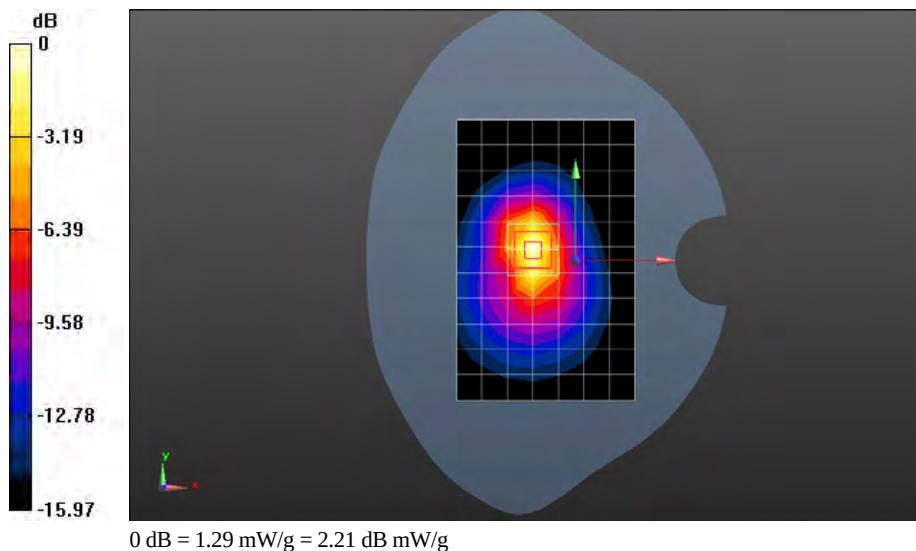

Test Laboratory: HUAWEI SAR Lab

U9510E WCDMA1700 1413CH Bottom edge 10mm

DUT: U9510E; Type: HSPA+/HSUPA/HSDPA/UMTS/GSM/GPRS/EDGE Mobile Phone with Bluetooth; Serial: SAR1

Communication System: HW-UMTS-FDD(WCDMA); Frequency: 1732.6 MHz

Medium parameters used: $f = 1733$ MHz; $\sigma = 1.487$ mho/m; $\epsilon_r = 53.067$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3736; ConvF(7.43, 7.43, 7.43); Calibrated: 4/26/2012;
- Sensor-Surface: 4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE4 Sn852; Calibrated: 11/16/2011
- Phantom: SAM3; Type: SAM; Serial: TP-1597
- DASY52 52.8.1(838); SEMCAD X 14.6.5(6469)

Configuration/Body/Area Scan (8x12x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 0.875 mW/g


Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 16.315 V/m; Power Drift = -0.06 dB

Peak SAR (extrapolated) = 1.677 mW/g

SAR(1 g) = 0.974 mW/g; SAR(10 g) = 0.499 mW/g

Maximum value of SAR (measured) = 1.12 mW/g

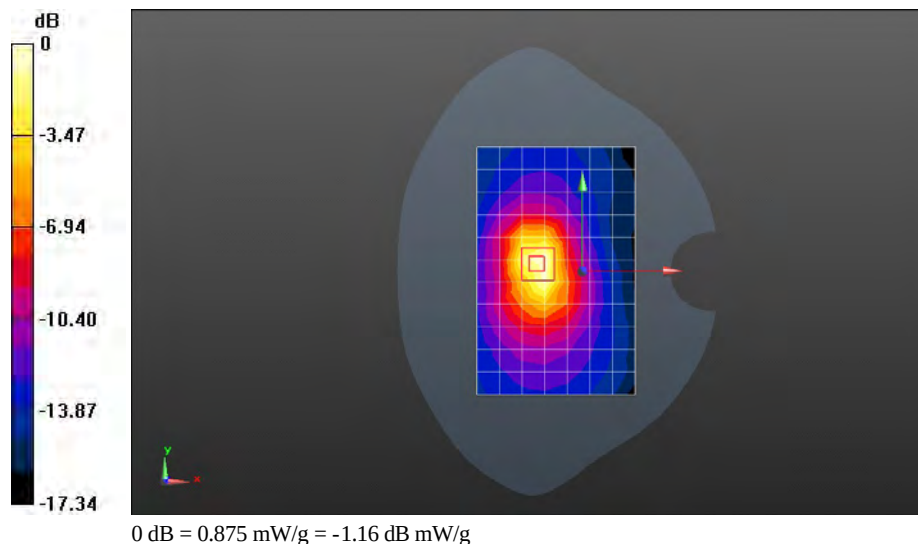

Test Laboratory: HUAWEI SAR Lab

U9510E WCDMA1700 1312CH Bottom edge 10mm

DUT: U9510E; Type: HSPA+/HSUPA/HSDPA/UMTS/GSM/GPRS/EDGE Mobile Phone with Bluetooth; Serial: SAR1

Communication System: HW-UMTS-FDD(WCDMA); Frequency: 1712.4 MHz

Medium parameters used (interpolated): $f = 1712.4$ MHz; $\sigma = 1.446$ mho/m; $\epsilon_r = 53.063$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3736; ConvF(7.43, 7.43, 7.43); Calibrated: 4/26/2012;
- Sensor-Surface: 4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE4 Sn852; Calibrated: 11/16/2011
- Phantom: SAM3; Type: SAM; Serial: TP-1597
- DASY52 52.8.1(838); SEMCAD X 14.6.5(6469)

Configuration/Body/Area Scan (8x12x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.806 mW/g

Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm


Reference Value = 15.677 V/m; Power Drift = 0.12 dB

Peak SAR (extrapolated) = 1.531 mW/g

SAR(1 g) = 0.890 mW/g; SAR(10 g) = 0.455 mW/g

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 1.03 mW/g

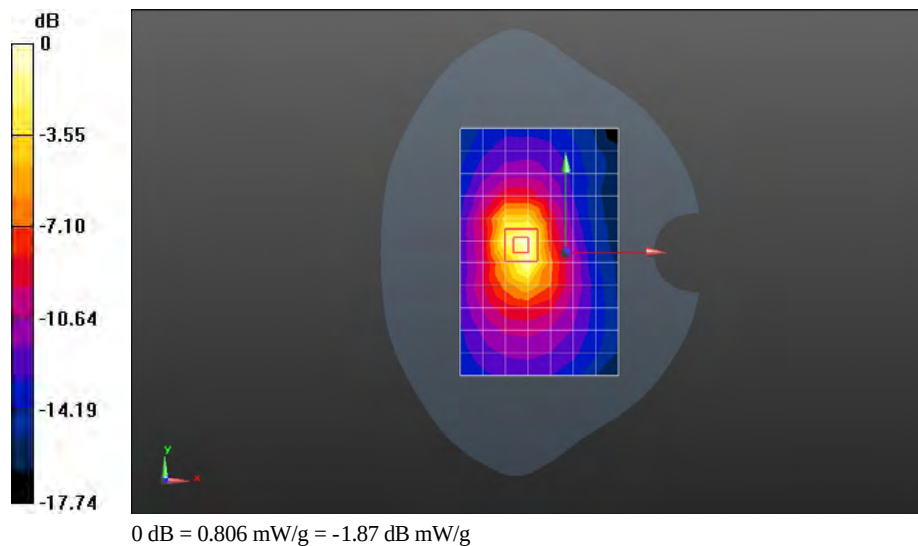

Test Laboratory: HUAWEI SAR Lab

U9510E WCDMA1700 1312CH Towards Ground 10mm with Headset

DUT: U9510E; Type: HSPA+/HSUPA/HSDPA/UMTS/GSM/GPRS/EDGE Mobile Phone with Bluetooth; Serial: SAR1

Communication System: HW-UMTS-FDD(WCDMA); Frequency: 1712.4 MHz

Medium parameters used (interpolated): $f = 1712.4$ MHz; $\sigma = 1.446$ mho/m; $\epsilon_r = 53.063$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3736; ConvF(7.43, 7.43, 7.43); Calibrated: 4/26/2012;
- Sensor-Surface: 4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE4 Sn852; Calibrated: 11/16/2011
- Phantom: SAM3; Type: SAM; Serial: TP-1597
- DASY52 52.8.1(838); SEMCAD X 14.6.5(6469)

Configuration/Body/Area Scan (8x12x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.934 mW/g

Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm


Reference Value = 14.780 V/m; Power Drift = -0.11 dB

Peak SAR (extrapolated) = 1.437 mW/g

SAR(1 g) = 0.883 mW/g; SAR(10 g) = 0.531 mW/g

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.966 mW/g

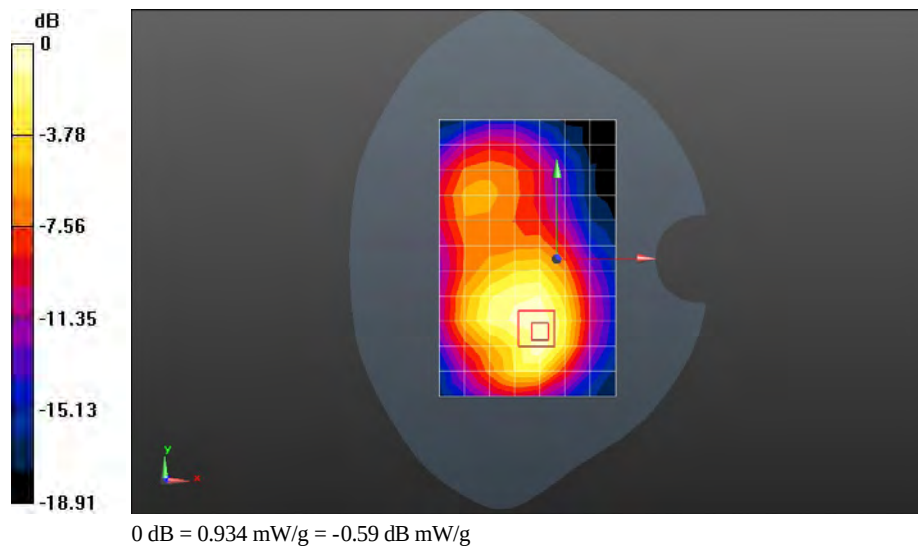

Test Laboratory: HUAWEI SAR Lab

U9510E WCDMA1900 9400CH Left hand touch cheek

DUT: U9510E; Type: HSHSPA+/HSUPA/HSDPA/UMTS/GSM/GPRS/EDGE Mobile Phone with Bluetooth; Serial: SAR1

Communication System: HW-UMTS-FDD(WCDMA); Frequency: 1880 MHz

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.434$ mho/m; $\epsilon_r = 39.851$; $\rho = 1000$ kg/m³

Phantom section: Left Section

DASY Configuration:

- Probe: EX3DV4 - SN3736; ConvF(7.67, 7.67, 7.67); Calibrated: 4/26/2012;
- Sensor-Surface: 4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE4 Sn852; Calibrated: 11/16/2011
- Phantom: SAM4; Type: SAM; Serial: TP-1620
- DASY52 52.8.1(838); SEMCAD X 14.6.5(6469)

Configuration/Head/Area Scan (8x12x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 0.443 mW/g

Configuration/Head/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 9.995 V/m; Power Drift = 0.14 dB

Peak SAR (extrapolated) = 0.689 mW/g

SAR(1 g) = 0.414 mW/g; SAR(10 g) = 0.249 mW/g

Maximum value of SAR (measured) = 0.450 mW/g


Configuration/Head/Zoom Scan (7x7x7)/Cube 1: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 9.995 V/m; Power Drift = 0.14 dB

Peak SAR (extrapolated) = 0.411 mW/g

SAR(1 g) = 0.275 mW/g; SAR(10 g) = 0.178 mW/g

Maximum value of SAR (measured) = 0.295 mW/g

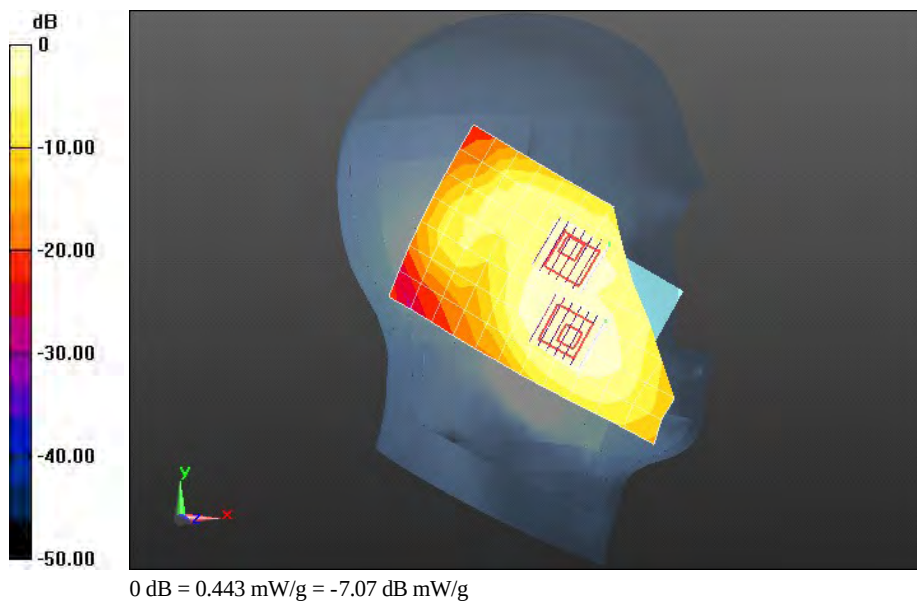

Test Laboratory: HUAWEI SAR Lab

U9510E WCDMA1900 9400CH Left hand tilt 15 degree

DUT: U9510E; Type: HSHSPA+/HSUPA/HSDPA/UMTS/GSM/GPRS/EDGE Mobile Phone with Bluetooth; Serial: SAR1

Communication System: HW-UMTS-FDD(WCDMA); Frequency: 1880 MHz

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.434$ mho/m; $\epsilon_r = 39.851$; $\rho = 1000$ kg/m³

Phantom section: Left Section

DASY Configuration:

- Probe: EX3DV4 - SN3736; ConvF(7.67, 7.67, 7.67); Calibrated: 4/26/2012;
- Sensor-Surface: 4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE4 Sn852; Calibrated: 11/16/2011
- Phantom: SAM4; Type: SAM; Serial: TP-1620
- DASY52 52.8.1(838); SEMCAD X 14.6.5(6469)

Configuration/Head/Area Scan (8x12x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 0.275 mW/g


Configuration/Head/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 14.386 V/m; Power Drift = 0.05 dB

Peak SAR (extrapolated) = 0.485 mW/g

SAR(1 g) = 0.273 mW/g; SAR(10 g) = 0.150 mW/g

Maximum value of SAR (measured) = 0.307 mW/g

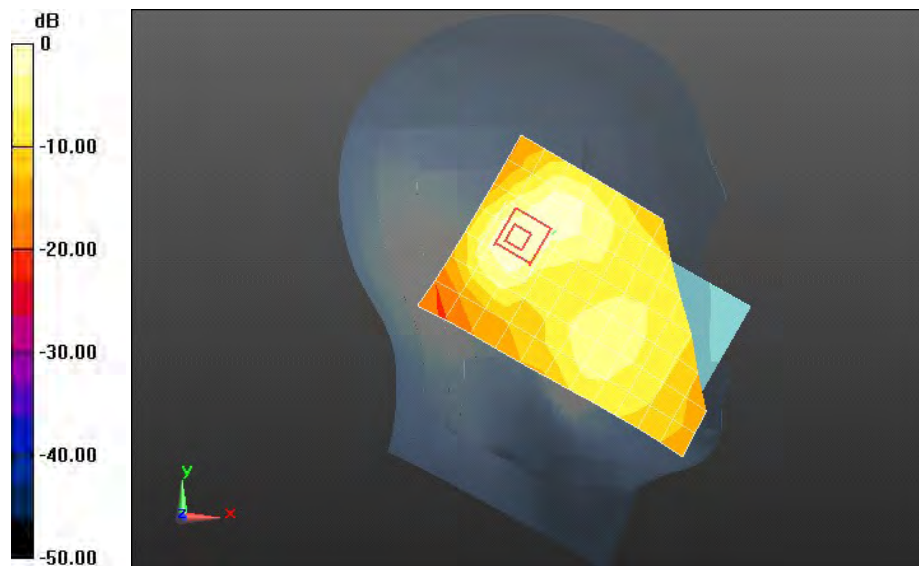

0 dB = 0.275 mW/g = -11.21 dB mW/g

Test Laboratory: HUAWEI SAR Lab

U9510E WCDMA1900 9400CH Right hand touch cheek**DUT: U9510E; Type: HSHSPA+/HSUPA/HSDPA/UMTS/GSM/GPRS/EDGE Mobile Phone with Bluetooth; Serial: SAR1**

Communication System: HW-UMTS-FDD(WCDMA); Frequency: 1880 MHz

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.434$ mho/m; $\epsilon_r = 39.851$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY Configuration:

- Probe: EX3DV4 - SN3736; ConvF(7.67, 7.67, 7.67); Calibrated: 4/26/2012;
- Sensor-Surface: 4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE4 Sn852; Calibrated: 11/16/2011
- Phantom: SAM4; Type: SAM; Serial: TP-1620
- DASY52 52.8.1(838); SEMCAD X 14.6.5(6469)

Configuration/Head/Area Scan (8x12x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 0.510 mW/g



Configuration/Head/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 10.205 V/m; Power Drift = 0.08 dB

Peak SAR (extrapolated) = 0.810 mW/g

SAR(1 g) = 0.501 mW/g; SAR(10 g) = 0.300 mW/g

Maximum value of SAR (measured) = 0.545 mW/g

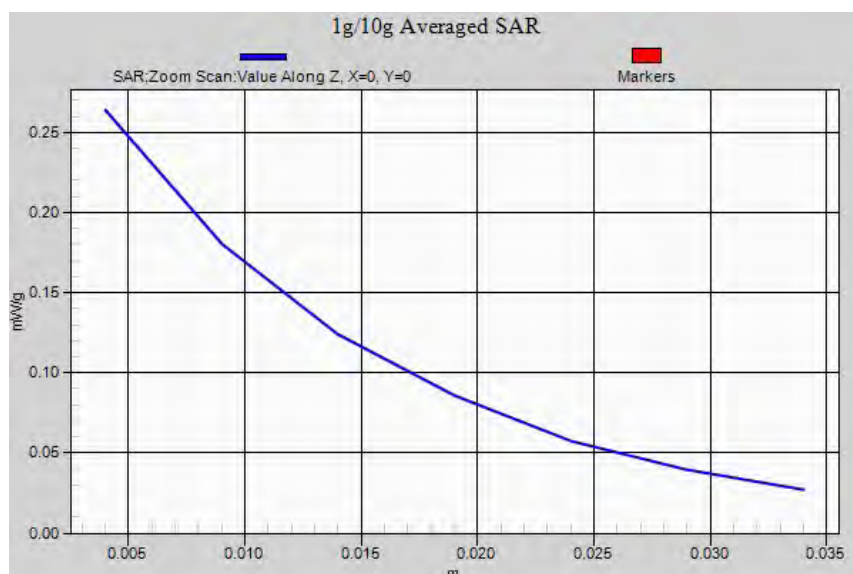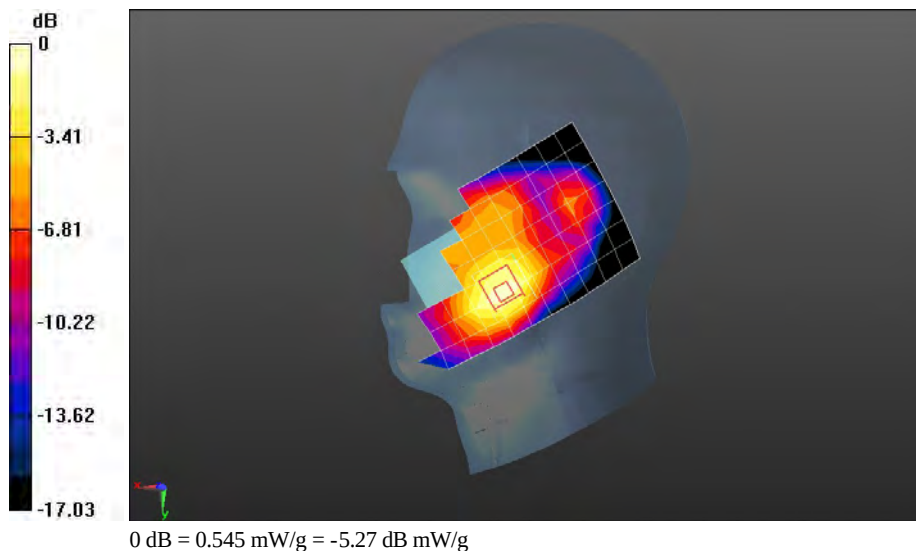

Test Laboratory: HUAWEI SAR Lab

U9510E WCDMA1900 9400CH Right hand tilt 15 degree

DUT: U9510E; Type: HSHSPA+/HSUPA/HSDPA/UMTS/GSM/GPRS/EDGE Mobile Phone with Bluetooth; Serial: SAR1

Communication System: HW-UMTS-FDD(WCDMA); Frequency: 1880 MHz

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.434$ mho/m; $\epsilon_r = 39.851$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY Configuration:

- Probe: EX3DV4 - SN3736; ConvF(7.67, 7.67, 7.67); Calibrated: 4/26/2012;
- Sensor-Surface: 4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE4 Sn852; Calibrated: 11/16/2011
- Phantom: SAM4; Type: SAM; Serial: TP-1620
- DASY52 52.8.1(838); SEMCAD X 14.6.5(6469)

Configuration/Head/Area Scan (8x12x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 0.251 mW/g


Configuration/Head/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 14.668 V/m; Power Drift = 0.04 dB

Peak SAR (extrapolated) = 0.491 mW/g

SAR(1 g) = 0.278 mW/g; SAR(10 g) = 0.149 mW/g

Maximum value of SAR (measured) = 0.315 mW/g

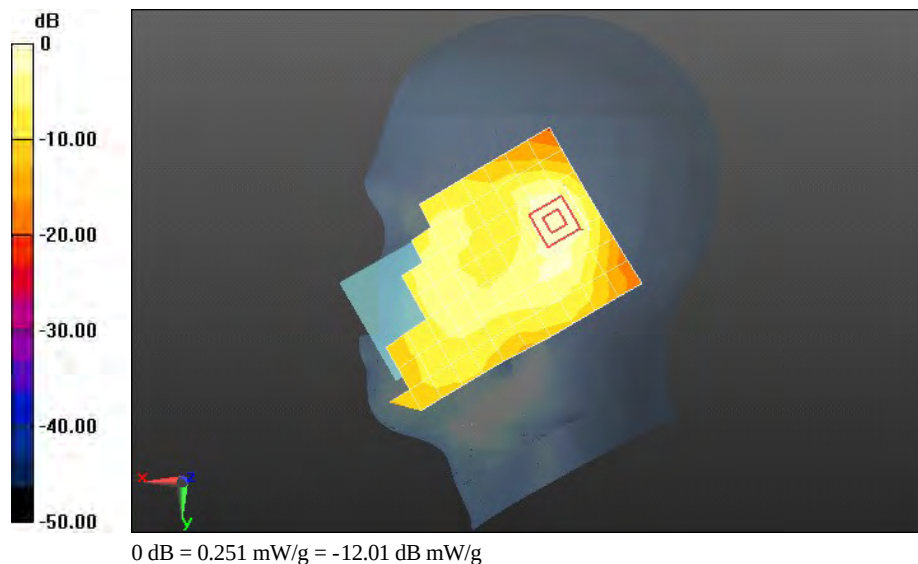

Test Laboratory: HUAWEI SAR Lab

U9510E WCDMA1900 9400CH Towards Phantom 10mm

DUT: U9510E; Type: HSPA+/HSUPA/HSDPA/UMTS/GSM/GPRS/EDGE Mobile Phone with Bluetooth; Serial: SAR1

Communication System: HW-UMTS-FDD(WCDMA); Frequency: 1880 MHz

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.536$ mho/m; $\epsilon_r = 52.98$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3736; ConvF(7.14, 7.14, 7.14); Calibrated: 4/26/2012;
- Sensor-Surface: 4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE4 Sn852; Calibrated: 11/16/2011
- Phantom: SAM4; Type: SAM; Serial: TP-1620
- DASY52 52.8.1(838); SEMCAD X 14.6.5(6469)

Configuration/Body/Area Scan (8x12x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 0.661 mW/g


Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 13.129 V/m; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 1.007 mW/g

SAR(1 g) = 0.632 mW/g; SAR(10 g) = 0.387 mW/g

Maximum value of SAR (measured) = 0.692 mW/g

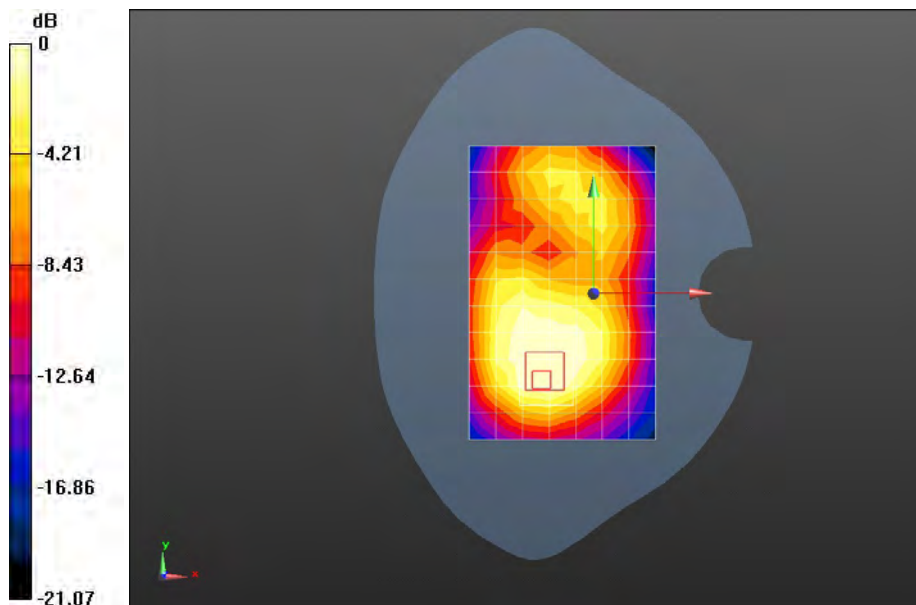

0 dB = 0.661 mW/g = -3.60 dB mW/g

Test Laboratory: HUAWEI SAR Lab

U9510E WCDMA1900 9400CH Towards Ground 10mm

DUT: U9510E; Type: HSPA+/HSUPA/HSDPA/UMTS/GSM/GPRS/EDGE Mobile Phone with Bluetooth; Serial: SAR1

Communication System: HW-UMTS-FDD(WCDMA); Frequency: 1880 MHz

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.536$ mho/m; $\epsilon_r = 52.98$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3736; ConvF(7.14, 7.14, 7.14); Calibrated: 4/26/2012;
- Sensor-Surface: 4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE4 Sn852; Calibrated: 11/16/2011
- Phantom: SAM4; Type: SAM; Serial: TP-1620
- DASY52 52.8.1(838); SEMCAD X 14.6.5(6469)

Configuration/Body/Area Scan (8x12x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 0.683 mW/g


Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 14.820 V/m; Power Drift = -0.05 dB

Peak SAR (extrapolated) = 1.147 mW/g

SAR(1 g) = 0.687 mW/g; SAR(10 g) = 0.403 mW/g

Maximum value of SAR (measured) = 0.760 mW/g

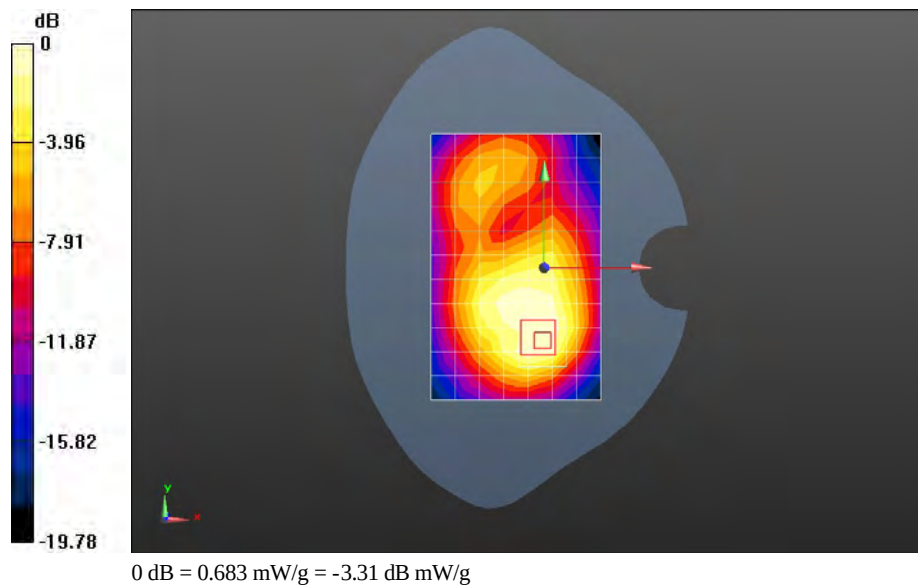

Test Laboratory: HUAWEI SAR Lab

U9510E WCDMA1900 9400CH Left edge 10mm

DUT: U9510E; Type: HSPA+/HSUPA/HSDPA/UMTS/GSM/GPRS/EDGE Mobile Phone with Bluetooth; Serial: SAR1

Communication System: HW-UMTS-FDD(WCDMA); Frequency: 1880 MHz

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.536$ mho/m; $\epsilon_r = 52.98$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3736; ConvF(7.14, 7.14, 7.14); Calibrated: 4/26/2012;
- Sensor-Surface: 4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE4 Sn852; Calibrated: 11/16/2011
- Phantom: SAM4; Type: SAM; Serial: TP-1620
- DASY52 52.8.1(838); SEMCAD X 14.6.5(6469)

Configuration/Body/Area Scan (8x12x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 0.395 mW/g


Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 13.429 V/m; Power Drift = 0.14 dB

Peak SAR (extrapolated) = 0.639 mW/g

SAR(1 g) = 0.394 mW/g; SAR(10 g) = 0.229 mW/g

Maximum value of SAR (measured) = 0.436 mW/g

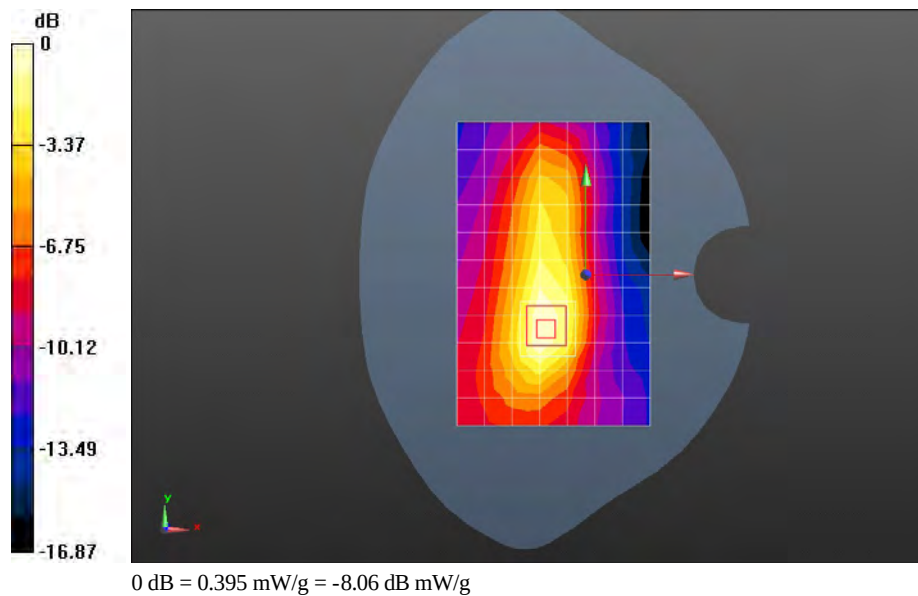

Test Laboratory: HUAWEI SAR Lab

U9510E WCDMA1900 9400CH Right edge 10mm

DUT: U9510E; Type: HSPA+/HSUPA/HSDPA/UMTS/GSM/GPRS/EDGE Mobile Phone with Bluetooth; Serial: SAR1

Communication System: HW-UMTS-FDD(WCDMA); Frequency: 1880 MHz

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.536$ mho/m; $\epsilon_r = 52.98$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3736; ConvF(7.14, 7.14, 7.14); Calibrated: 4/26/2012;
- Sensor-Surface: 4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE4 Sn852; Calibrated: 11/16/2011
- Phantom: SAM4; Type: SAM; Serial: TP-1620
- DASY52 52.8.1(838); SEMCAD X 14.6.5(6469)

Configuration/Body/Area Scan (8x12x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 0.209 mW/g

Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 8.057 V/m; Power Drift = 0.03 dB

Peak SAR (extrapolated) = 0.317 mW/g

SAR(1 g) = 0.199 mW/g; SAR(10 g) = 0.117 mW/g

Maximum value of SAR (measured) = 0.219 mW/g


Configuration/Body/Zoom Scan (7x7x7)/Cube 1: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 8.057 V/m; Power Drift = 0.03 dB

Peak SAR (extrapolated) = 0.306 mW/g

SAR(1 g) = 0.197 mW/g; SAR(10 g) = 0.119 mW/g

Maximum value of SAR (measured) = 0.216 mW/g

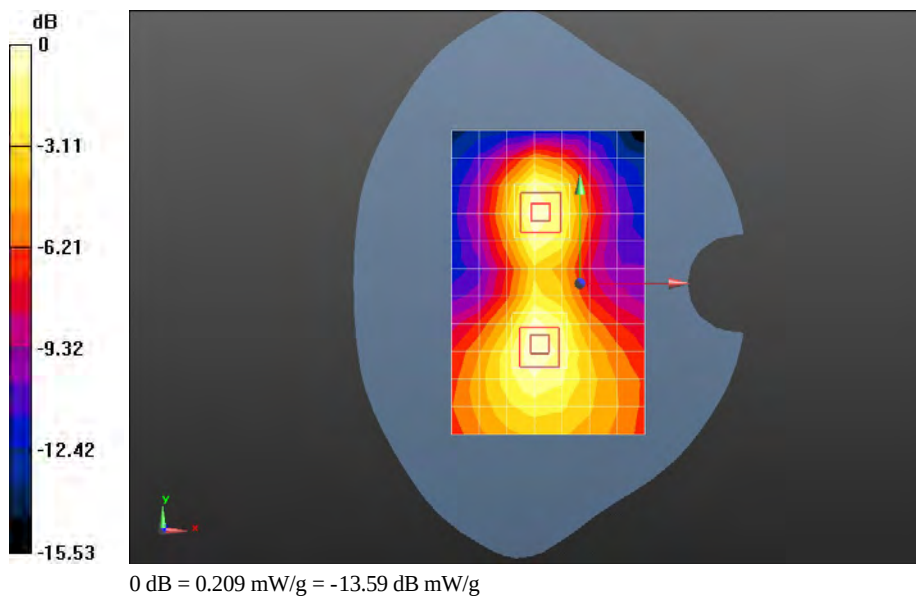

Test Laboratory: HUAWEI SAR Lab

U9510E WCDMA1900 9538CH Bottom edge 10mm

DUT: U9510E; Type: HSPA+/HSUPA/HSDPA/UMTS/GSM/GPRS/EDGE Mobile Phone with Bluetooth; Serial: SAR1

Communication System: HW-UMTS-FDD(WCDMA); Frequency: 1907.6 MHz

Medium parameters used: $f = 1908$ MHz; $\sigma = 1.563$ mho/m; $\epsilon_r = 53.097$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3736; ConvF(7.14, 7.14, 7.14); Calibrated: 4/26/2012;
- Sensor-Surface: 4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE4 Sn852; Calibrated: 11/16/2011
- Phantom: SAM4; Type: SAM; Serial: TP-1620
- DASY52 52.8.1(838); SEMCAD X 14.6.5(6469)

Configuration/Body/Area Scan (8x12x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 1.25 mW/g


Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 24.663 V/m; Power Drift = 0.07 dB

Peak SAR (extrapolated) = 2.166 mW/g

SAR(1 g) = 1.18 mW/g; SAR(10 g) = 0.629 mW/g

Maximum value of SAR (measured) = 1.41 mW/g

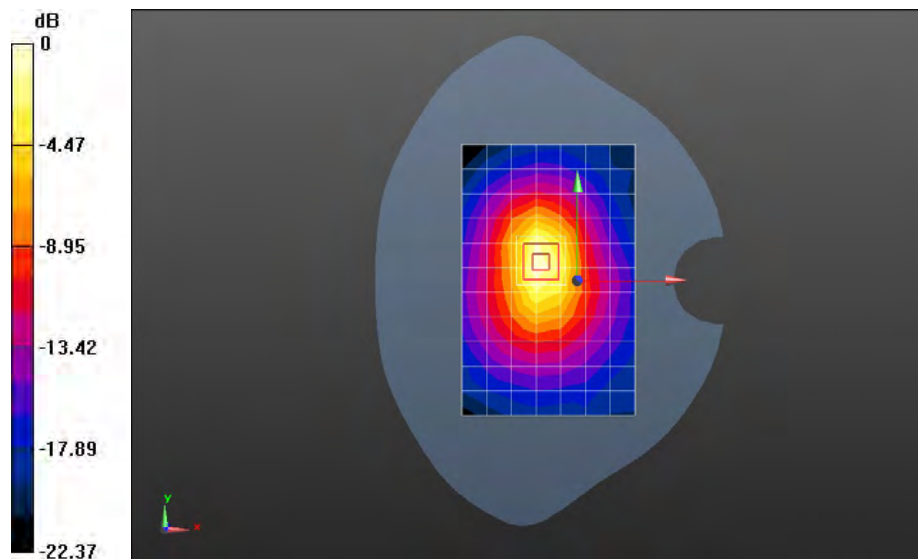

0 dB = 1.25 mW/g = 1.91 dB mW/g

Test Laboratory: HUAWEI SAR Lab

U9510E WCDMA1900 9400CH Bottom edge 10mm**DUT: U9510E; Type: HSPA+/HSUPA/HSDPA/UMTS/GSM/GPRS/EDGE Mobile Phone with Bluetooth; Serial: SAR1**

Communication System: HW-UMTS-FDD(WCDMA); Frequency: 1880 MHz

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.536$ mho/m; $\epsilon_r = 52.98$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3736; ConvF(7.14, 7.14, 7.14); Calibrated: 4/26/2012;
- Sensor-Surface: 4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE4 Sn852; Calibrated: 11/16/2011
- Phantom: SAM4; Type: SAM; Serial: TP-1620
- DASY52 52.8.1(838); SEMCAD X 14.6.5(6469)

Configuration/Body/Area Scan (8x12x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 1.24 mW/g


Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 24.479 V/m; Power Drift = 0.16 dB

Peak SAR (extrapolated) = 2.140 mW/g

SAR(1 g) = 1.19 mW/g; SAR(10 g) = 0.631 mW/g

Maximum value of SAR (measured) = 1.41 mW/g

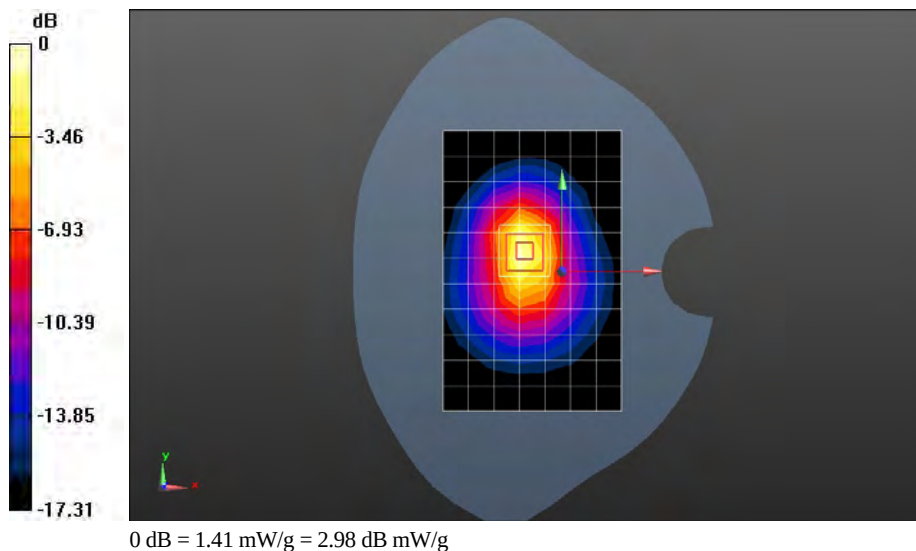

Test Laboratory: HUAWEI SAR Lab

U9510E WCDMA1900 9262CH Bottom edge 10mm

DUT: U9510E; Type: HSPA+/HSUPA/HSDPA/UMTS/GSM/GPRS/EDGE Mobile Phone with Bluetooth; Serial: SAR1

Communication System: HW-UMTS-FDD(WCDMA); Frequency: 1852.4 MHz

Medium parameters used (interpolated): $f = 1852.4$ MHz; $\sigma = 1.492$ mho/m; $\epsilon_r = 53.127$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3736; ConvF(7.14, 7.14, 7.14); Calibrated: 4/26/2012;
- Sensor-Surface: 4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE4 Sn852; Calibrated: 11/16/2011
- Phantom: SAM4; Type: SAM; Serial: TP-1620
- DASY52 52.8.1(838); SEMCAD X 14.6.5(6469)

Configuration/Body/Area Scan (8x12x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 1.23 mW/g

Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm


Reference Value = 24.270 V/m; Power Drift = 0.17 dB

Peak SAR (extrapolated) = 2.073 mW/g

SAR(1 g) = 1.18 mW/g; SAR(10 g) = 0.619 mW/g

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 1.37 mW/g

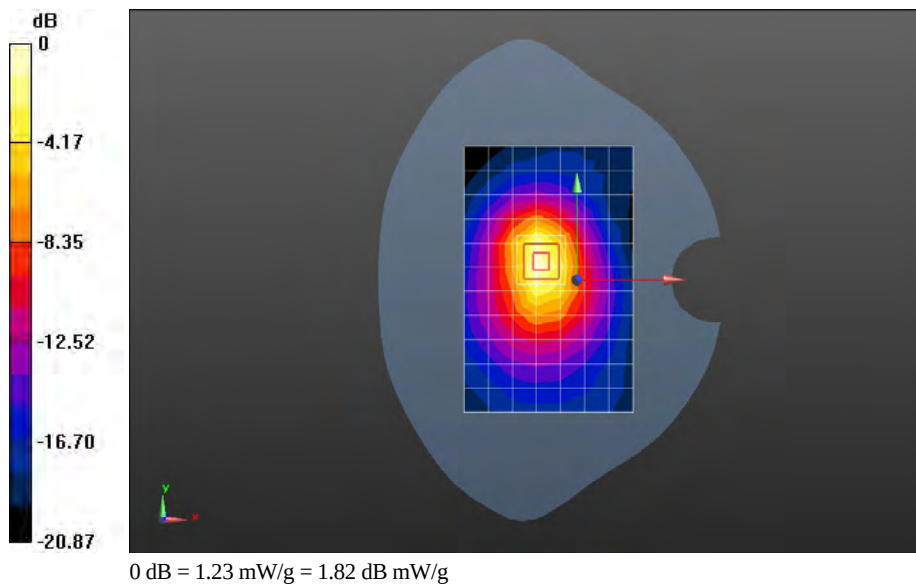

Test Laboratory: HUAWEI SAR Lab

U9510E WCDMA1900 9400CH Towards Ground 10mm with Headset

DUT: U9510E; Type: HSPA+/HSUPA/HSDPA/UMTS/GSM/GPRS/EDGE Mobile Phone with Bluetooth; Serial: SAR1

Communication System: HW-UMTS-FDD(WCDMA); Frequency: 1880 MHz

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.536$ mho/m; $\epsilon_r = 52.98$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3736; ConvF(7.14, 7.14, 7.14); Calibrated: 4/26/2012;
- Sensor-Surface: 4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE4 Sn852; Calibrated: 11/16/2011
- Phantom: SAM4; Type: SAM; Serial: TP-1620
- DASY52 52.8.1(838); SEMCAD X 14.6.5(6469)

Configuration/Body/Area Scan (8x12x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 0.684 mW/g


Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 9.455 V/m; Power Drift = -0.00 dB

Peak SAR (extrapolated) = 1.177 mW/g

SAR(1 g) = 0.706 mW/g; SAR(10 g) = 0.410 mW/g

Maximum value of SAR (measured) = 0.783 mW/g

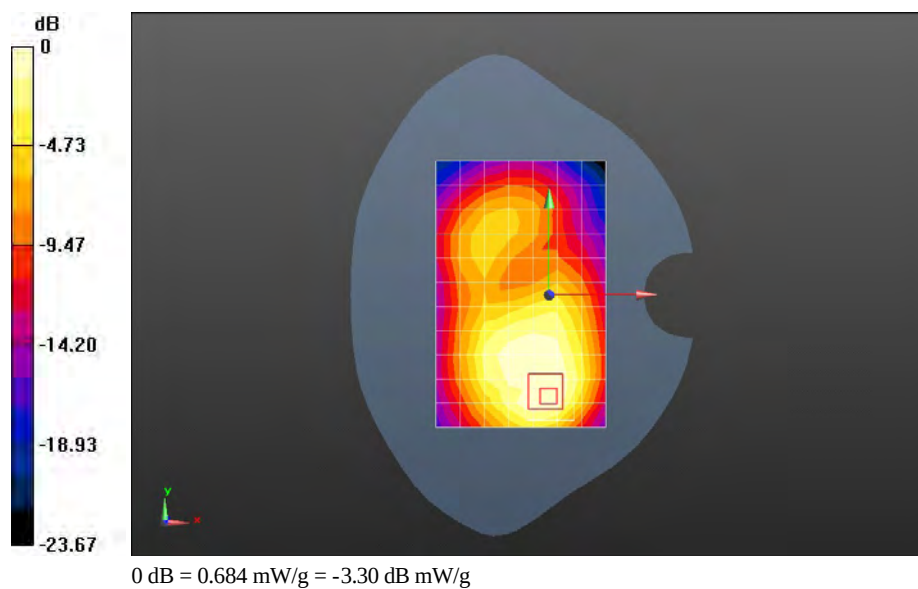

Test Laboratory: HUAWEI SAR Lab

U9510E WiFi 11b 6CH Left hand touch cheek

DUT: U9510E; Type: HSPA+/HSUPA/HSDPA/UMTS/GSM/GPRS/EDGE Mobile Phone with Bluetooth; Serial: SAR1

Communication System: WiFi(802.11b/g/n); Frequency: 2437 MHz

Medium parameters used: $f = 2437$ MHz; $\sigma = 1.801$ mho/m; $\epsilon_r = 40.198$; $\rho = 1000$ kg/m³

Phantom section: Left Section

DASY Configuration:

- Probe: EX3DV4 - SN3736; ConvF(6.78, 6.78, 6.78); Calibrated: 4/26/2012;
- Sensor-Surface: 4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE4 Sn852; Calibrated: 11/16/2011
- Phantom: SAM4; Type: SAM; Serial: TP-1620
- DASY52 52.8.1(838); SEMCAD X 14.6.5(6469)

Configuration/Head/Area Scan (8x12x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 0.115 mW/g


Configuration/Head/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 3.659 V/m; Power Drift = 0.09 dB

Peak SAR (extrapolated) = 0.266 mW/g

SAR(1 g) = 0.112 mW/g; SAR(10 g) = 0.054 mW/g

Maximum value of SAR (measured) = 0.119 mW/g

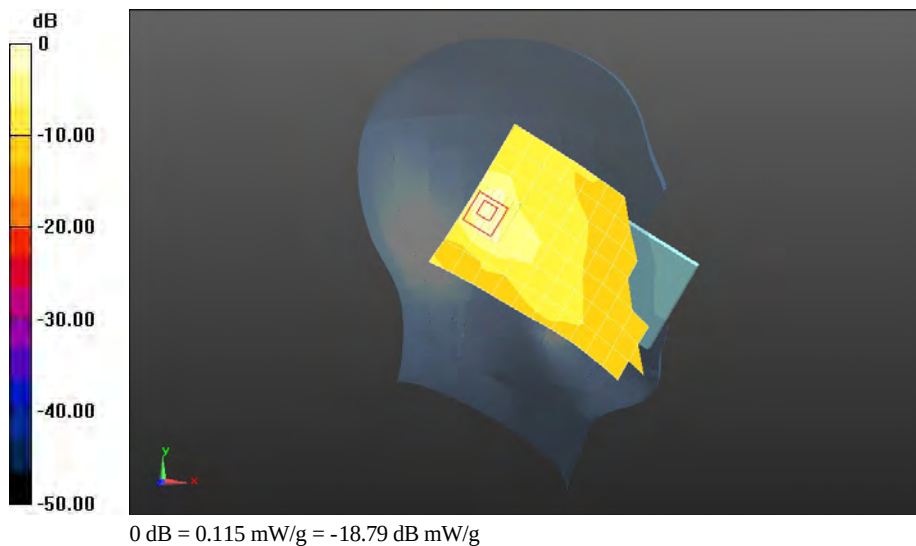

Test Laboratory: HUAWEI SAR Lab

U9510E WiFi 11b 6CH Left hand tilt 15 degree

DUT: U9510E; Type: HSPA+/HSUPA/HSDPA/UMTS/GSM/GPRS/EDGE Mobile Phone with Bluetooth; Serial: SAR1

Communication System: WiFi(802.11b/g/n); Frequency: 2437 MHz

Medium parameters used: $f = 2437$ MHz; $\sigma = 1.801$ mho/m; $\epsilon_r = 40.198$; $\rho = 1000$ kg/m³

Phantom section: Left Section

DASY Configuration:

- Probe: EX3DV4 - SN3736; ConvF(6.78, 6.78, 6.78); Calibrated: 4/26/2012;
- Sensor-Surface: 4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE4 Sn852; Calibrated: 11/16/2011
- Phantom: SAM4; Type: SAM; Serial: TP-1620
- DASY52 52.8.1(838); SEMCAD X 14.6.5(6469)

Configuration/Head/Area Scan (8x12x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 0.179 mW/g


Configuration/Head/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 5.511 V/m; Power Drift = 0.03 dB

Peak SAR (extrapolated) = 0.343 mW/g

SAR(1 g) = 0.159 mW/g; SAR(10 g) = 0.075 mW/g

Maximum value of SAR (measured) = 0.178 mW/g

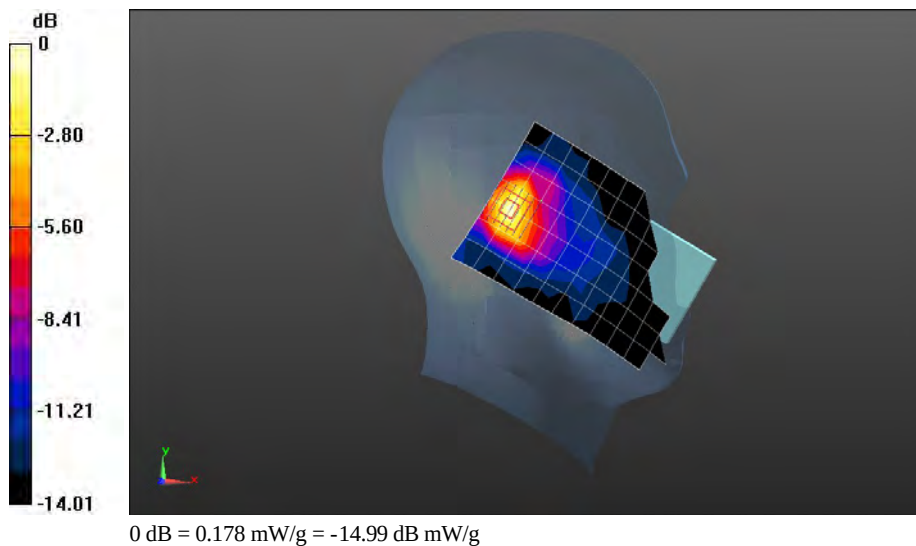

Test Laboratory: HUAWEI SAR Lab

U9510E WiFi 11b 6CH Right hand touch cheek

DUT: U9510E; Type: HSPA+/HSUPA/HSDPA/UMTS/GSM/GPRS/EDGE Mobile Phone with Bluetooth; Serial: SAR1

Communication System: WiFi(802.11b/g/n); Frequency: 2437 MHz

Medium parameters used: $f = 2437$ MHz; $\sigma = 1.801$ mho/m; $\epsilon_r = 40.198$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY Configuration:

- Probe: EX3DV4 - SN3736; ConvF(6.78, 6.78, 6.78); Calibrated: 4/26/2012;
- Sensor-Surface: 4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE4 Sn852; Calibrated: 11/16/2011
- Phantom: SAM4; Type: SAM; Serial: TP-1620
- DASY52 52.8.1(838); SEMCAD X 14.6.5(6469)

Configuration/Head/Area Scan (8x12x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 0.120 mW/g


Configuration/Head/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 4.413 V/m; Power Drift = 0.13 dB

Peak SAR (extrapolated) = 0.245 mW/g

SAR(1 g) = 0.113 mW/g; SAR(10 g) = 0.056 mW/g

Maximum value of SAR (measured) = 0.123 mW/g

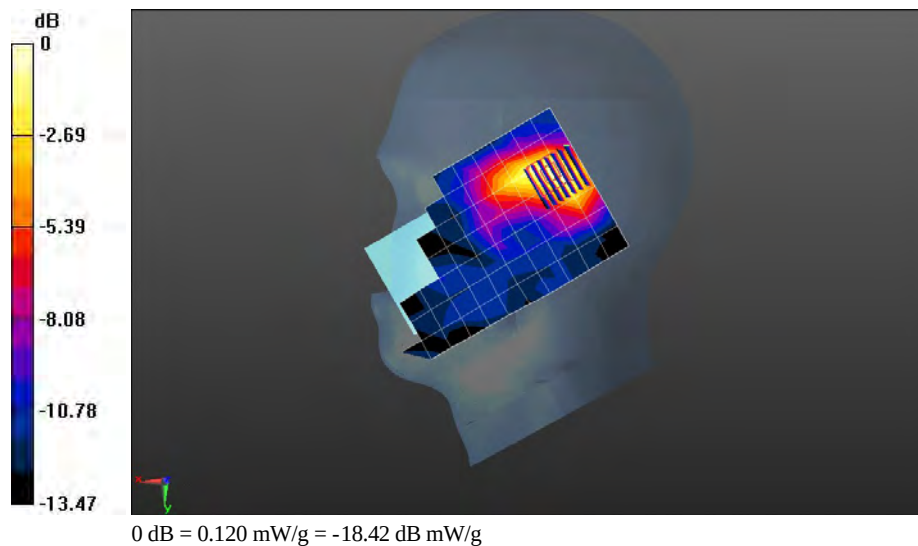

Test Laboratory: HUAWEI SAR Lab

U9510E WiFi 11b 6CH Right hand tilt 15 degree

DUT: U9510E; Type: HSPA+/HSUPA/HSDPA/UMTS/GSM/GPRS/EDGE Mobile Phone with Bluetooth; Serial: SAR1

Communication System: WiFi(802.11b/g/n); Frequency: 2437 MHz

Medium parameters used: $f = 2437$ MHz; $\sigma = 1.801$ mho/m; $\epsilon_r = 40.198$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY Configuration:

- Probe: EX3DV4 - SN3736; ConvF(6.78, 6.78, 6.78); Calibrated: 4/26/2012;
- Sensor-Surface: 4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE4 Sn852; Calibrated: 11/16/2011
- Phantom: SAM4; Type: SAM; Serial: TP-1620
- DASY52 52.8.1(838); SEMCAD X 14.6.5(6469)

Configuration/Head/Area Scan (8x12x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 0.218 mW/g



Configuration/Head/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 5.200 V/m; Power Drift = -0.06 dB

Peak SAR (extrapolated) = 0.470 mW/g

SAR(1 g) = 0.206 mW/g; SAR(10 g) = 0.093 mW/g

Maximum value of SAR (measured) = 0.234 mW/g

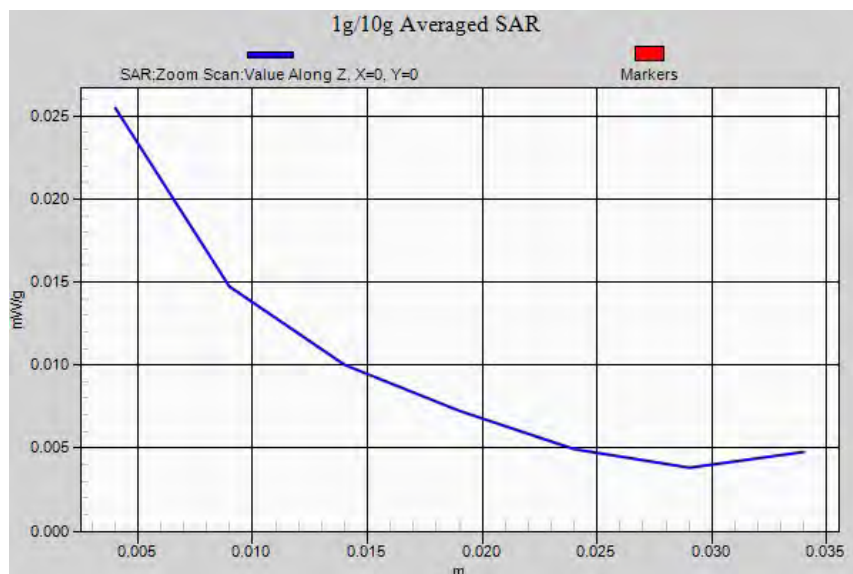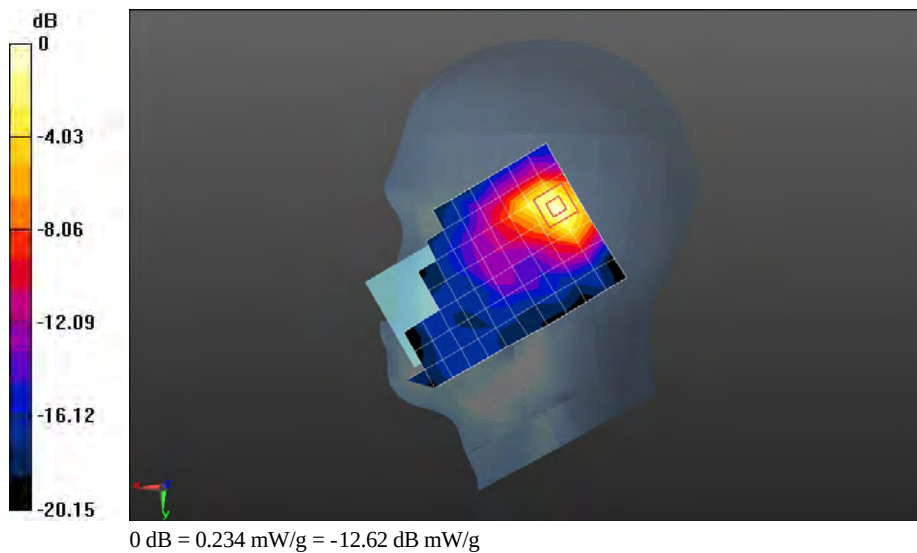

Test Laboratory: HUAWEI SAR Lab

U9510E WiFi 11b 6CH Towards Phantom 10mm

DUT: U9510E; Type: HSPA+/HSUPA/HSDPA/UMTS/GSM/GPRS/EDGE Mobile Phone with Bluetooth; Serial: SAR1

Communication System: WiFi(802.11b/g/n); Frequency: 2437 MHz

Medium parameters used: $f = 2437$ MHz; $\sigma = 2.005$ mho/m; $\epsilon_r = 52.298$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3736; ConvF(6.85, 6.85, 6.85); Calibrated: 4/26/2012;
- Sensor-Surface: 4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE4 Sn852; Calibrated: 11/16/2011
- Phantom: SAM3; Type: SAM; Serial: TP-1597
- DASY52 52.8.1(838); SEMCAD X 14.6.5(6469)

Configuration/Body/Area Scan (8x12x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 0.0522 mW/g


Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 2.913 V/m; Power Drift = -0.02 dB

Peak SAR (extrapolated) = 0.089 mW/g

SAR(1 g) = 0.046 mW/g; SAR(10 g) = 0.025 mW/g

Maximum value of SAR (measured) = 0.0521 mW/g

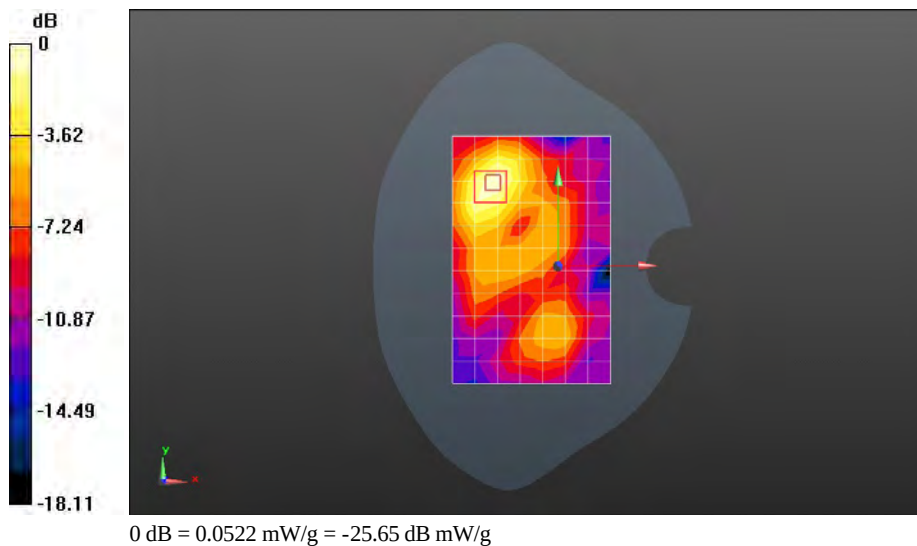

Test Laboratory: HUAWEI SAR Lab

U9510E WiFi 11b 6CH Towards Ground 10mm

DUT: U9510E; Type: HSPA+/HSUPA/HSDPA/UMTS/GSM/GPRS/EDGE Mobile Phone with Bluetooth; Serial: SAR1

Communication System: WiFi(802.11b/g/n); Frequency: 2437 MHz

Medium parameters used: $f = 2437$ MHz; $\sigma = 2.005$ mho/m; $\epsilon_r = 52.298$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3736; ConvF(6.85, 6.85, 6.85); Calibrated: 4/26/2012;
- Sensor-Surface: 4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE4 Sn852; Calibrated: 11/16/2011
- Phantom: SAM3; Type: SAM; Serial: TP-1597
- DASY52 52.8.1(838); SEMCAD X 14.6.5(6469)

Configuration/Body/Area Scan (8x12x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 0.109 mW/g


Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 4.075 V/m; Power Drift = 0.11 dB

Peak SAR (extrapolated) = 0.201 mW/g

SAR(1 g) = 0.102 mW/g; SAR(10 g) = 0.051 mW/g

Maximum value of SAR (measured) = 0.115 mW/g

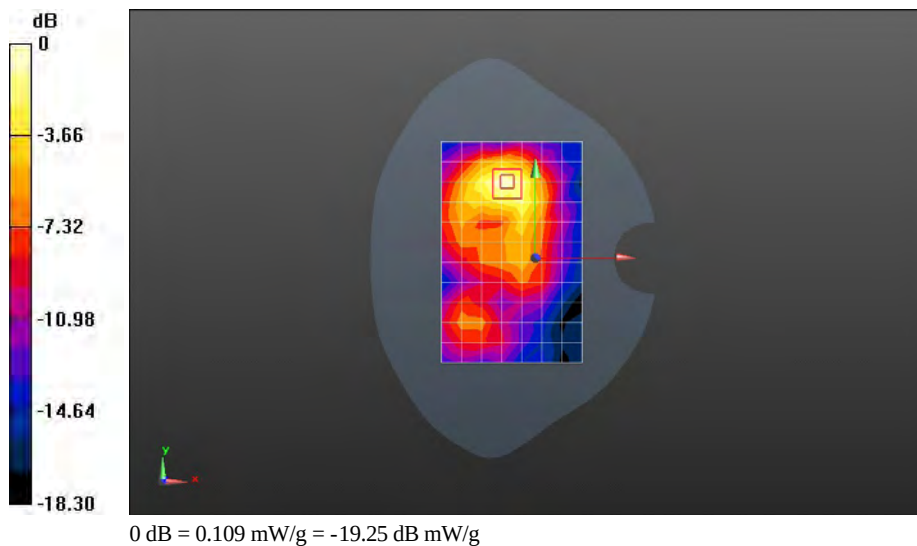

Test Laboratory: HUAWEI SAR Lab

U9510E WiFi 11b 6CH Left edge 10mm

DUT: U9510E; Type: HSPA+/HSUPA/HSDPA/UMTS/GSM/GPRS/EDGE Mobile Phone with Bluetooth; Serial: SAR1

Communication System: WiFi(802.11b/g/n); Frequency: 2437 MHz

Medium parameters used: $f = 2437$ MHz; $\sigma = 2.005$ mho/m; $\epsilon_r = 52.298$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3736; ConvF(6.85, 6.85, 6.85); Calibrated: 4/26/2012;
- Sensor-Surface: 4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE4 Sn852; Calibrated: 11/16/2011
- Phantom: SAM3; Type: SAM; Serial: TP-1597
- DASY52 52.8.1(838); SEMCAD X 14.6.5(6469)

Configuration/Body/Area Scan (8x12x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 0.0215 mW/g


Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 2.387 V/m; Power Drift = 0.17 dB

Peak SAR (extrapolated) = 0.043 mW/g

SAR(1 g) = 0.022 mW/g; SAR(10 g) = 0.014 mW/g

Maximum value of SAR (measured) = 0.0241 mW/g

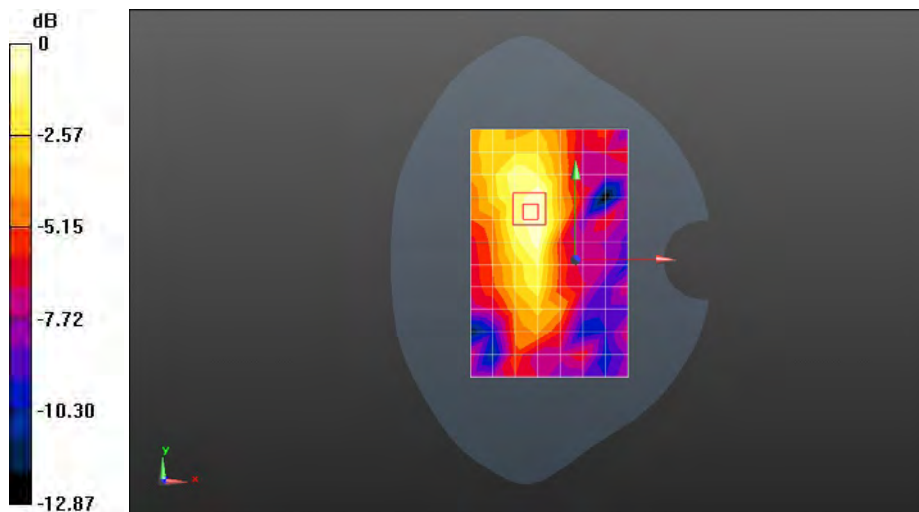

0 dB = 0.0215 mW/g = -33.35 dB mW/g

Test Laboratory: HUAWEI SAR Lab

U9510E WiFi 11b 6CH Right edge 10mm

DUT: U9510E; Type: HSPA+/HSUPA/HSDPA/UMTS/GSM/GPRS/EDGE Mobile Phone with Bluetooth; Serial: SAR1

Communication System: WiFi(802.11b/g/n); Frequency: 2437 MHz

Medium parameters used: $f = 2437$ MHz; $\sigma = 2.005$ mho/m; $\epsilon_r = 52.298$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3736; ConvF(6.85, 6.85, 6.85); Calibrated: 4/26/2012;
- Sensor-Surface: 4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE4 Sn852; Calibrated: 11/16/2011
- Phantom: SAM3; Type: SAM; Serial: TP-1597
- DASY52 52.8.1(838); SEMCAD X 14.6.5(6469)

Configuration/Body/Area Scan (8x12x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 0.0213 mW/g


Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 1.866 V/m; Power Drift = 0.03 dB

Peak SAR (extrapolated) = 0.045 mW/g

SAR(1 g) = 0.023 mW/g; SAR(10 g) = 0.012 mW/g

Maximum value of SAR (measured) = 0.0258 mW/g

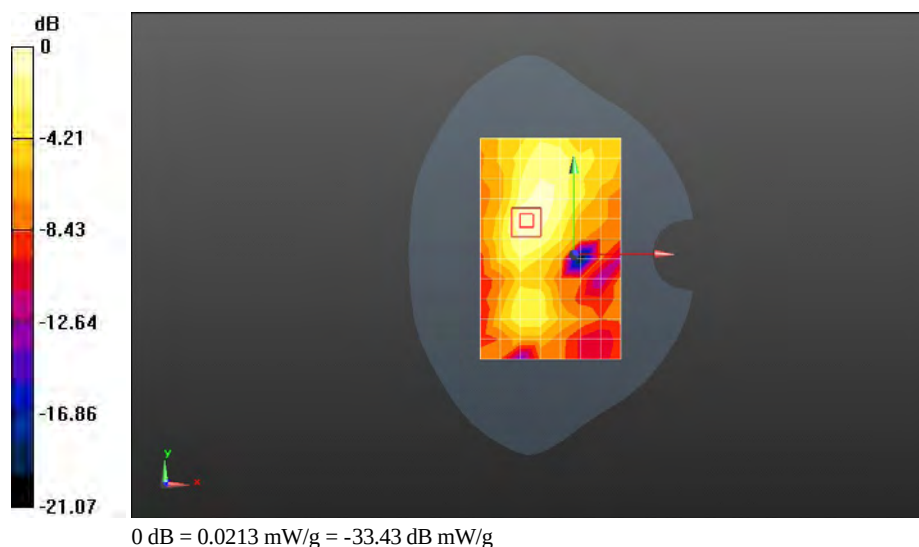

Test Laboratory: HUAWEI SAR Lab

U9510E WiFi 11b 6CH Top edge 10mm

DUT: U9510E; Type: HSPA+/HSUPA/HSDPA/UMTS/GSM/GPRS/EDGE Mobile Phone with Bluetooth; Serial: SAR1

Communication System: WiFi(802.11b/g/n); Frequency: 2437 MHz

Medium parameters used: $f = 2437$ MHz; $\sigma = 2.005$ mho/m; $\epsilon_r = 52.298$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3736; ConvF(6.85, 6.85, 6.85); Calibrated: 4/26/2012;
- Sensor-Surface: 4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE4 Sn852; Calibrated: 11/16/2011
- Phantom: SAM3; Type: SAM; Serial: TP-1597
- DASY52 52.8.1(838); SEMCAD X 14.6.5(6469)

Configuration/Body/Area Scan (8x12x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 0.118 mW/g

Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 4.370 V/m; Power Drift = 0.07 dB

Peak SAR (extrapolated) = 0.313 mW/g

SAR(1 g) = 0.152 mW/g; SAR(10 g) = 0.070 mW/g

Maximum value of SAR (measured) = 0.177 mW/g

