



Appendix A. System Check Plots

Table of contents
SystemPerformanceCheck-D835-ES-Head
SystemPerformanceCheck-D835-ES-Body
SystemPerformanceCheck-D835-ES-Body
SystemPerformanceCheck-D1900-ES-Head
SystemPerformanceCheck-D1900-ES-Body
SystemPerformanceCheck-D1900-ES-Body
SystemPerformanceCheck-D2450-ES-Head
SystemPerformanceCheck-D2450-ES-Body
SystemPerformanceCheck-D2600-ES-Head
SystemPerformanceCheck-D2600-ES-Body

Test Laboratory: HUAWEI SAR/HAC Lab

System Performance Check-D835-ES-Head

DUT: Dipole 835 MHz D835V2; Type: D835V2; Serial: D835V2 - SN:4d059

Communication System: UID 0, CW; Frequency: 835 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 835$ MHz; $\sigma = 0.915$ S/m; $\epsilon_r = 41.681$; $\rho = 1000$ kg/m³


Phantom section: Flat Section

DASY Configuration:

- ζ Probe: ES3DV3 - SN3168; ConvF(6.32, 6.32, 6.32); Calibrated: 2015-9-28;
- ζ Sensor-Surface: 3mm (Mechanical Surface Detection), $z = 2.0, 32.0$
- ζ Electronics: DAE4 Sn851; Calibrated: 2015-7-20
- ζ Phantom: SAM2; Type: SAM; Serial: TP:1474
- ζ DASY52 52.8.8(1222);

Configuration/d=15mm, Pin=250mW/Area Scan (6x13x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (measured) = 2.52 W/kg

Configuration/d=15mm, Pin=250mW/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 53.92 V/m; Power Drift = -0.03 dB
Peak SAR (extrapolated) = 3.66 W/kg
SAR(1 g) = 2.44 W/kg; SAR(10 g) = 1.58 W/kg
Maximum value of SAR (measured) = 2.87 W/kg

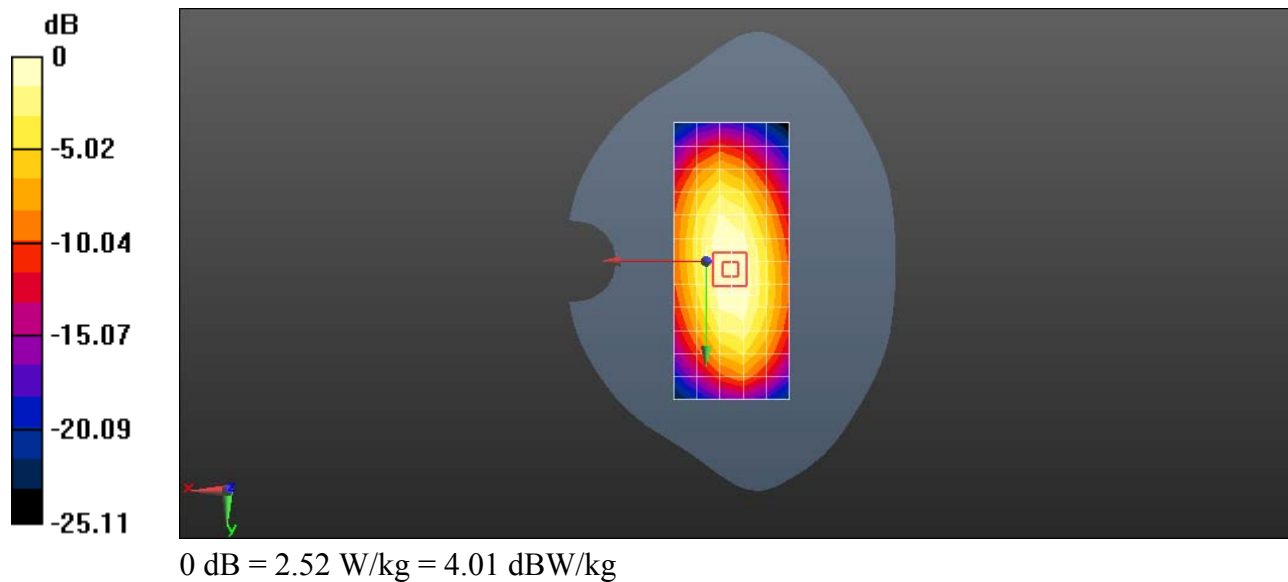

Test Laboratory: HUAWEI SAR/HAC Lab

SystemPerformanceCheck-D835-ES-Body

DUT: Dipole 835 MHz D835V2; Type: D835V2; Serial: D835V2 - SN:4d059

Communication System: UID 0, CW; Frequency: 835 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 835$ MHz; $\sigma = 0.985$ S/m; $\epsilon_r = 53.126$; $\rho = 1000$ kg/m³


Phantom section: Flat Section

DASY Configuration:

- ζ Probe: ES3DV3 - SN3168; ConvF(6.24, 6.24, 6.24); Calibrated: 2015-9-28;
- ζ Sensor-Surface: 3mm (Mechanical Surface Detection), $z = 2.0, 32.0$
- ζ Electronics: DAE4 Sn851; Calibrated: 2015-7-20
- ζ Phantom: SAM2; Type: SAM; Serial: TP:1474
- ζ DASY52 52.8.8(1222);

Configuration/d=15mm, Pin=250mW/Area Scan (6x13x1): Measurement grid: $dx=15$ mm, $dy=15$ mm
Maximum value of SAR (measured) = 2.64 W/kg

Configuration/d=15mm, Pin=250mW/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm
Reference Value = 51.77 V/m; Power Drift = -0.03 dB
Peak SAR (extrapolated) = 3.55 W/kg
SAR(1 g) = 2.44 W/kg; SAR(10 g) = 1.6 W/kg
Maximum value of SAR (measured) = 2.85 W/kg

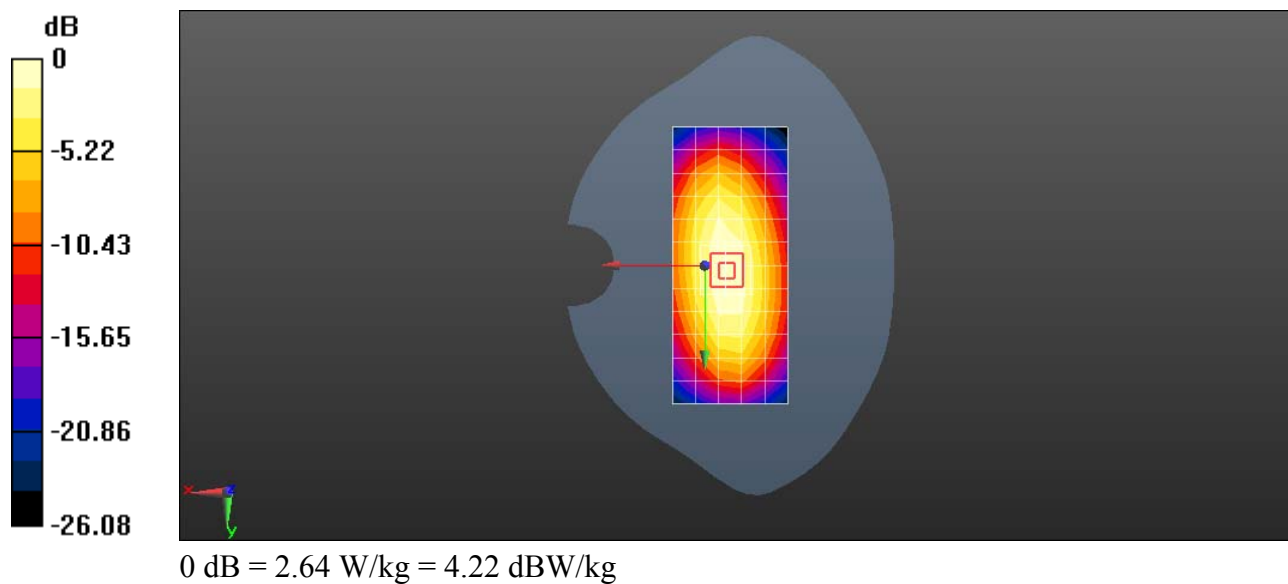

Test Laboratory: HUAWEI SAR/HAC Lab

SystemPerformanceCheck-D835-ES-Body

DUT: Dipole 835 MHz D835V2; Type: D835V2; Serial: D835V2 - SN:4d059

Communication System: UID 0, CW; Frequency: 835 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 835$ MHz; $\sigma = 0.991$ S/m; $\epsilon_r = 54.156$; $\rho = 1000$ kg/m³


Phantom section: Flat Section

DASY Configuration:

- ζ Probe: ES3DV3 - SN3168; ConvF(6.24, 6.24, 6.24); Calibrated: 2015-9-28;
- ζ Sensor-Surface: 3mm (Mechanical Surface Detection), $z = 2.0, 32.0$
- ζ Electronics: DAE4 Sn851; Calibrated: 2015-7-20
- ζ Phantom: SAM2; Type: SAM; Serial: TP:1474
- ζ DASY52 52.8.8(1222);

Configuration/d=15mm, Pin=250mW/Area Scan (6x13x1): Measurement grid: $dx=15$ mm, $dy=15$ mm
Maximum value of SAR (measured) = 2.49 W/kg

Configuration/d=15mm, Pin=250mW/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm
Reference Value = 52.90 V/m; Power Drift = -0.01 dB
Peak SAR (extrapolated) = 3.64 W/kg
SAR(1 g) = 2.49 W/kg; SAR(10 g) = 1.63 W/kg
Maximum value of SAR (measured) = 2.92 W/kg

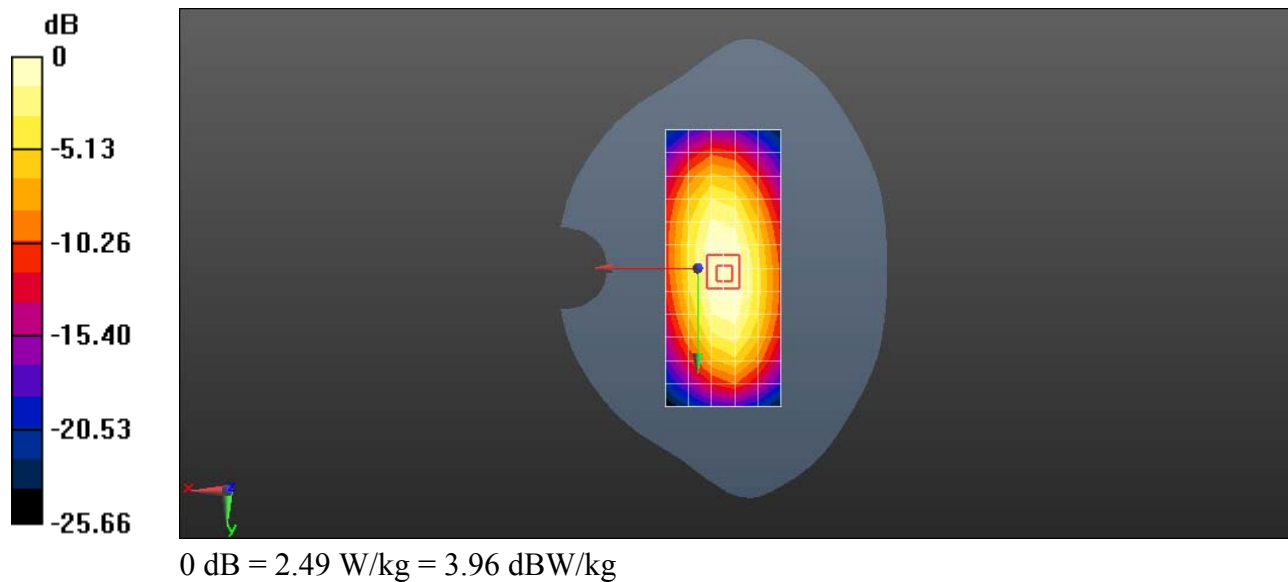

Test Laboratory: HUAWEI SAR/HAC Lab

SystemPerformanceCheck-D1900-ES-Head

DUT: Dipole 1900 MHz D1900V2; Type: D1900V2; Serial: D1900V2 - SN:5d091

Communication System: UID 0, CW (0); Frequency: 1900 MHz;Duty Cycle: 1:1

Medium parameters used: $f = 1900$ MHz; $\sigma = 1.389$ S/m; $\epsilon_r = 41.202$; $\rho = 1000$ kg/m³


Phantom section: Flat Section

DASY Configuration:

- Probe: ES3DV3 - SN3168; ConvF(5.13, 5.13, 5.13); Calibrated: 2015-9-28;
- Sensor-Surface: 3mm (Mechanical Surface Detection), $z = 2.0, 32.0$
- Electronics: DAE4 Sn851; Calibrated: 2015-7-20
- Phantom: SAM1; Type: SAM; Serial: TP-1475
- DASY52 52.8.8(1222);

Configuration/d=10mm pin=250mW/Area Scan (6x10x1): Measurement grid: $dx=15$ mm, $dy=15$ mm
Maximum value of SAR (measured) = 12.8 W/kg

Configuration/d=10mm pin=250mW/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm
Reference Value = 80.41 V/m; Power Drift = -0.11 dB
Peak SAR (extrapolated) = 18.9 W/kg
SAR(1 g) = 10.3 W/kg; SAR(10 g) = 5.35 W/kg
Maximum value of SAR (measured) = 12.9 W/kg

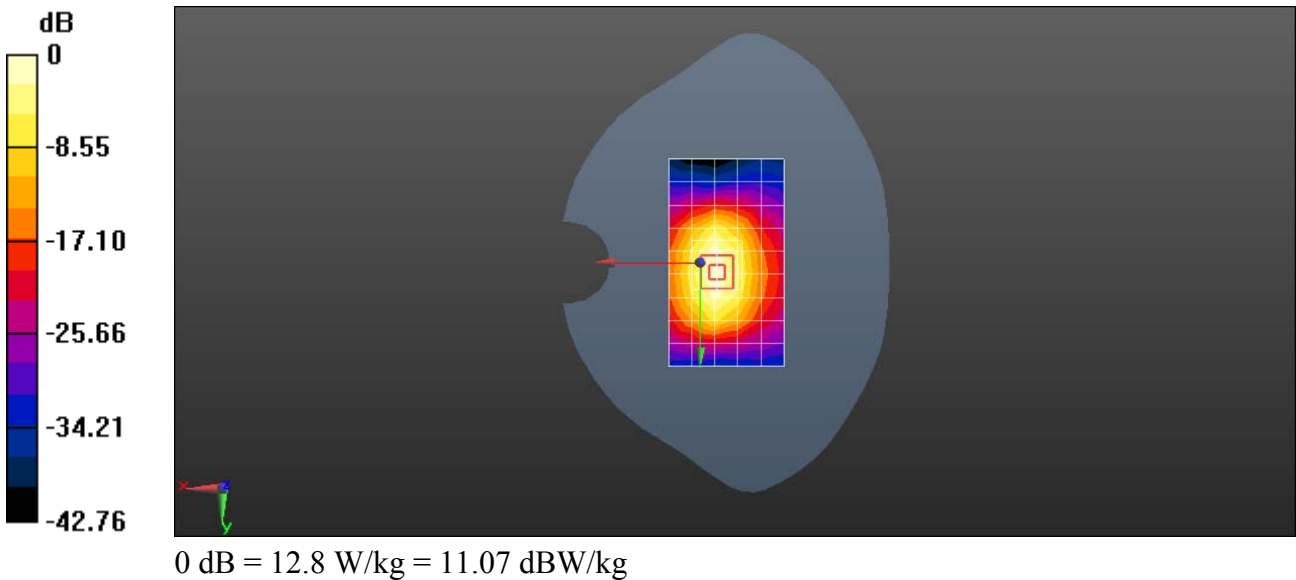

Test Laboratory: HUAWEI SAR/HAC Lab

SystemPerformanceCheck-D1900-ES-Body

DUT: Dipole 1900 MHz D1900V2; Type: D1900V2; Serial: D1900V2 - SN:5d091

Communication System: UID 0, CW (0); Frequency: 1900 MHz;Duty Cycle: 1:1

Medium parameters used: $f = 1900$ MHz; $\sigma = 1.487$ S/m; $\epsilon_r = 51.604$; $\rho = 1000$ kg/m³


Phantom section: Flat Section

DASY Configuration:

- Probe: ES3DV3 - SN3168; ConvF(4.74, 4.74, 4.74); Calibrated: 2015-9-28;
- Sensor-Surface: 3mm (Mechanical Surface Detection), $z = 2.0, 32.0$
- Electronics: DAE4 Sn851; Calibrated: 2015-7-20
- Phantom: SAM2; Type: SAM; Serial: TP:1474
- DASY52 52.8.8(1222);

Configuration/d=10mm pin=250mW/Area Scan (6x10x1): Measurement grid: $dx=15$ mm, $dy=15$ mm
Maximum value of SAR (measured) = 10.8 W/kg

Configuration/d=10mm pin=250mW/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm
Reference Value = 89.58 V/m; Power Drift = -0.15 dB
Peak SAR (extrapolated) = 18.3 W/kg
SAR(1 g) = 10.4 W/kg; SAR(10 g) = 5.42 W/kg
Maximum value of SAR (measured) = 13.2 W/kg

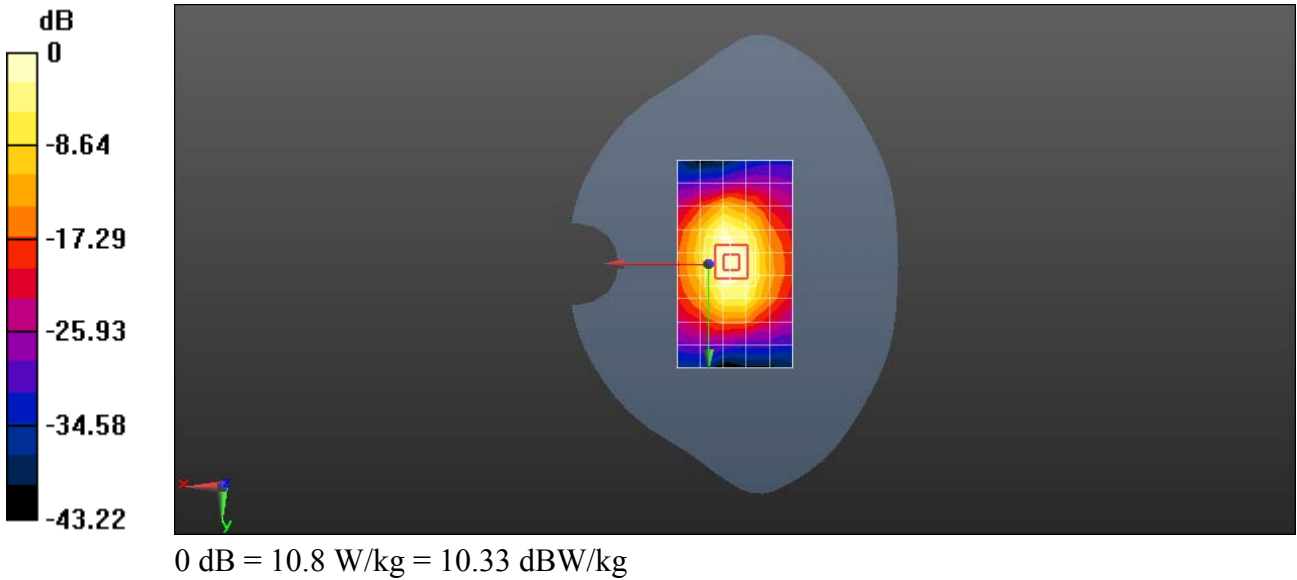

Test Laboratory: HUAWEI SAR/HAC Lab

SystemPerformanceCheck-D1900-ES-Body

DUT: Dipole 1900 MHz D1900V2; Type: D1900V2; Serial: D1900V2 - SN:5d091

Communication System: UID 0, CW (0); Frequency: 1900 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1900$ MHz; $\sigma = 1.501$ S/m; $\epsilon_r = 52.379$; $\rho = 1000$ kg/m³


Phantom section: Flat Section

DASY Configuration:

- ζ Probe: ES3DV3 - SN3168; ConvF(4.74, 4.74, 4.74); Calibrated: 2015-9-28;
- ζ Sensor-Surface: 3mm (Mechanical Surface Detection), $z = 2.0, 32.0$
- ζ Electronics: DAE4 Sn851; Calibrated: 2015-7-20
- ζ Phantom: SAM2; Type: SAM; Serial: TP:1474
- ζ DASY52 52.8.8(1222);

Configuration/d=10mm pin=250mW/Area Scan (6x10x1): Measurement grid: $dx=15$ mm, $dy=15$ mm
Maximum value of SAR (measured) = 8.39 W/kg

Configuration/d=10mm pin=250mW/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm
Reference Value = 90.98 V/m; Power Drift = -0.00 dB
Peak SAR (extrapolated) = 18.6 W/kg
SAR(1 g) = 10.5 W/kg; SAR(10 g) = 5.49 W/kg
Maximum value of SAR (measured) = 13.3 W/kg

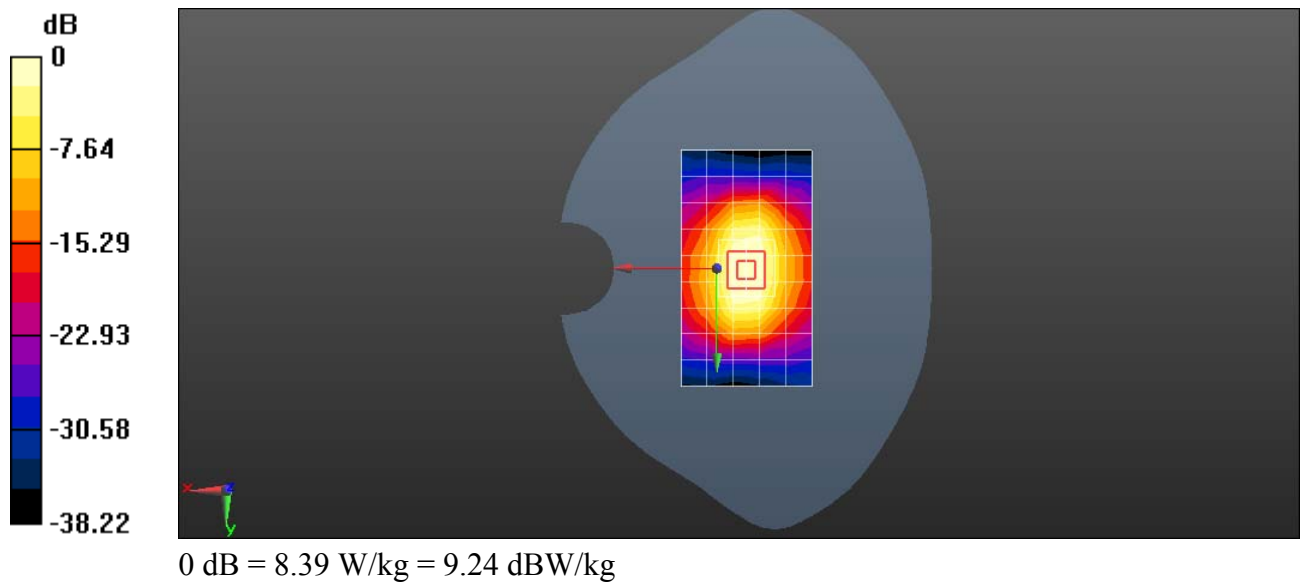

Test Laboratory: HUAWEI SAR/HAC Lab

SystemPerformanceCheck-D2450-ES-Head

DUT: Dipole 2450 MHz D2450V2; Type: D2450V2; Serial: D2450V2 - SN:860

Communication System: UID 0, CW; Frequency: 2450 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 2450$ MHz; $\sigma = 1.855$ S/m; $\epsilon_r = 40.441$; $\rho = 1000$ kg/m³


Phantom section: Flat Section

DASY Configuration:

- ζ Probe: ES3DV3 - SN3168; ConvF(4.55, 4.55, 4.55); Calibrated: 2015-9-28;
- ζ Sensor-Surface: 3mm (Mechanical Surface Detection), $z = 2.0, 32.0$
- ζ Electronics: DAE4 Sn851; Calibrated: 2015-7-20
- ζ Phantom: SAM2; Type: SAM; Serial: TP:1474
- ζ DASY52 52.8.8(1222);

Configuration/d=10mm, Pin=250mW/Area Scan (6x11x1): Measurement grid: $dx=12$ mm, $dy=12$ mm
Maximum value of SAR (measured) = 16.0 W/kg

Configuration/d=10mm, Pin=250mW/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm
Reference Value = 90.57 V/m; Power Drift = 0.06 dB
Peak SAR (extrapolated) = 27.4 W/kg
SAR(1 g) = 13.4 W/kg; SAR(10 g) = 6.2 W/kg
Maximum value of SAR (measured) = 17.6 W/kg

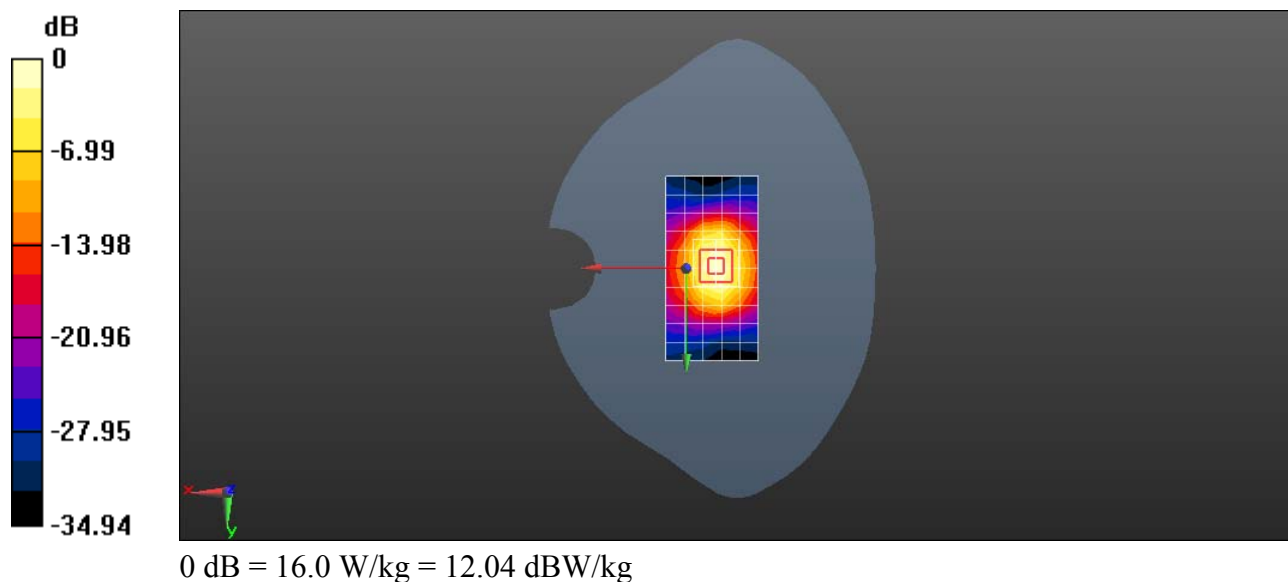

Test Laboratory: HUAWEI SAR/HAC Lab

SystemPerformanceCheck-D2450-ES-Body

DUT: Dipole 2450 MHz D2450V2; Type: D2450V2; Serial: D2450V2 - SN:860

Communication System: UID 0, CW; Frequency: 2450 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 2450$ MHz; $\sigma = 1.965$ S/m; $\epsilon_r = 51.502$; $\rho = 1000$ kg/m³


Phantom section: Flat Section

DASY Configuration:

- ζ Probe: ES3DV3 - SN3168; ConvF(4.35, 4.35, 4.35); Calibrated: 2015-9-28;
- ζ Sensor-Surface: 3mm (Mechanical Surface Detection), $z = 2.0, 32.0$
- ζ Electronics: DAE4 Sn851; Calibrated: 2015-7-20
- ζ Phantom: SAM2; Type: SAM; Serial: TP:1474
- ζ DASY52 52.8.8(1222);

Configuration/d=10mm, Pin=250mW/Area Scan (6x11x1): Measurement grid: $dx=12$ mm, $dy=12$ mm
Maximum value of SAR (measured) = 13.3 W/kg

Configuration/d=10mm, Pin=250mW/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm
Reference Value = 87.63 V/m; Power Drift = -0.09 dB
Peak SAR (extrapolated) = 27.6 W/kg
SAR(1 g) = 12.9 W/kg; SAR(10 g) = 5.83 W/kg
Maximum value of SAR (measured) = 17.0 W/kg

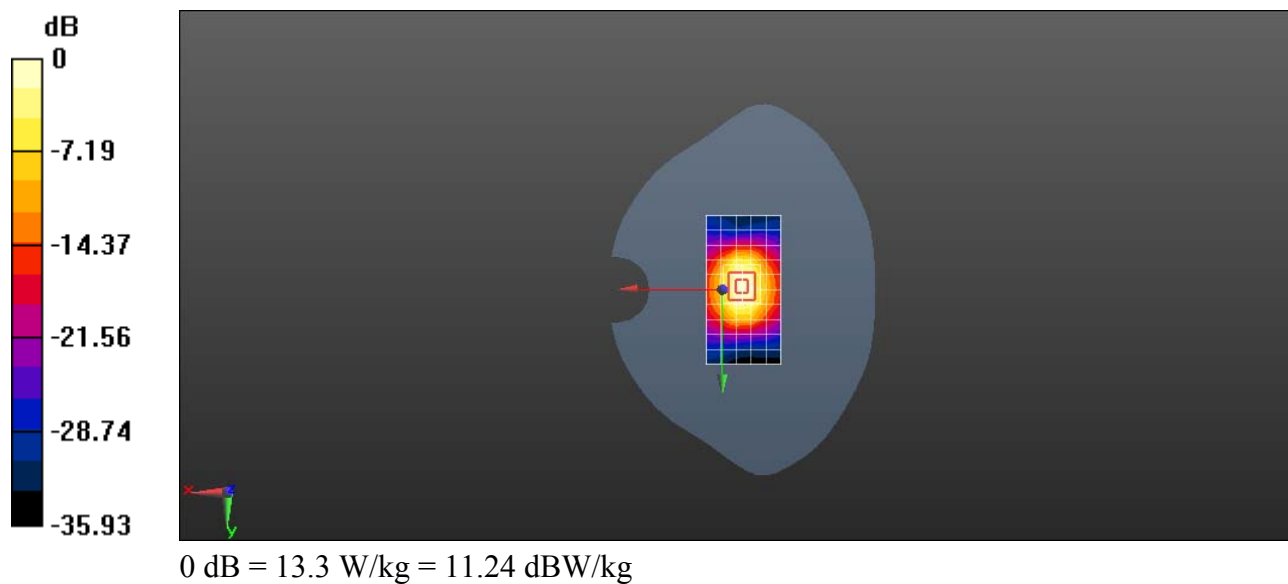

Test Laboratory: HUAWEI SAR/HAC Lab

SystemPerformanceCheck-D2600-ES-Head

DUT: Dipole 2600 MHz D2600V2; Type: D2600V2; Serial: D2600V2 - SN:1021

Communication System: UID 0, CW; Frequency: 2600 MHz;Duty Cycle: 1:1

Medium parameters used: $f = 2600$ MHz; $\sigma = 2.034$ S/m; $\epsilon_r = 40.016$; $\rho = 1000$ kg/m³


Phantom section: Flat Section

DASY Configuration:

- Probe: ES3DV3 - SN3168; ConvF(4.48, 4.48, 4.48); Calibrated: 2015-9-28;
- Sensor-Surface: 3mm (Mechanical Surface Detection), $z = 2.0, 32.0$
- Electronics: DAE4 Sn851; Calibrated: 2015-7-20
- Phantom: SAM1; Type: SAM; Serial: TP-1475
- DASY52 52.8.8(1222);

Configuration/d=10mm, Pin=250mW/Area Scan (8x11x1): Measurement grid: $dx=12$ mm, $dy=12$ mm
Maximum value of SAR (measured) = 17.5 W/kg

Configuration/d=10mm, Pin=250mW/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm
Reference Value = 84.83 V/m; Power Drift = 0.18 dB
Peak SAR (extrapolated) = 31.3 W/kg
SAR(1 g) = 14.8 W/kg; SAR(10 g) = 6.62 W/kg
Maximum value of SAR (measured) = 19.8 W/kg

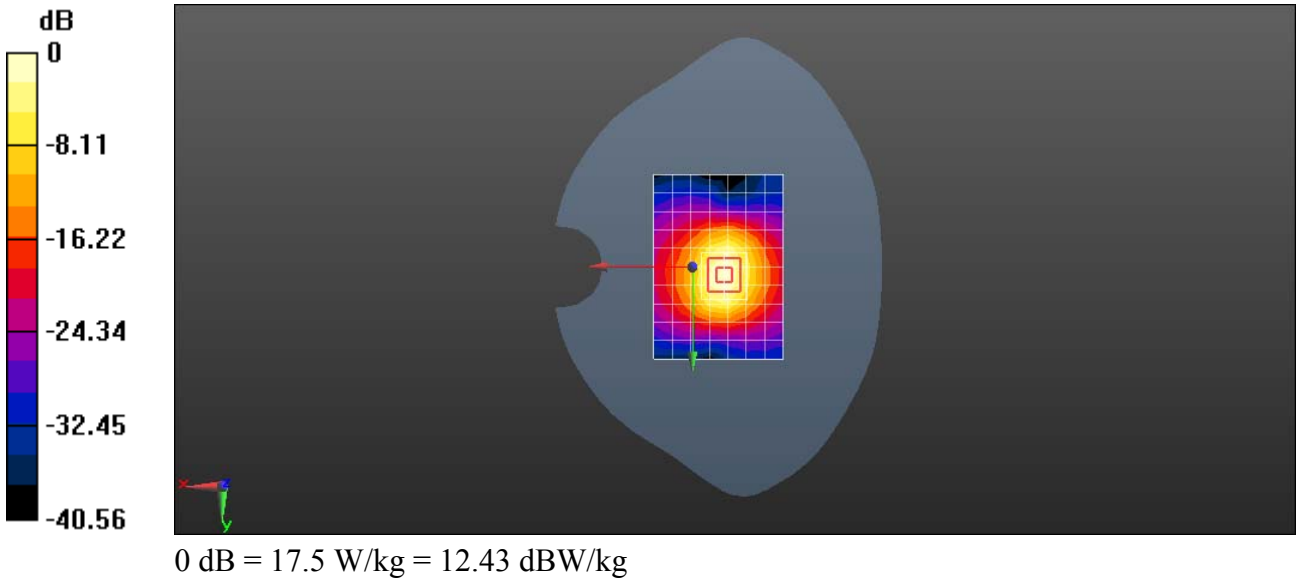

Test Laboratory: HUAWEI SAR/HAC Lab

SystemPerformanceCheck-D2600-ES-Body

DUT: Dipole 2600 MHz D2600V2; Type: D2600V2; Serial: D2600V2 - SN:1021

Communication System: UID 0, CW; Frequency: 2600 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 2600$ MHz; $\sigma = 2.176$ S/m; $\epsilon_r = 50.633$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- ζ Probe: ES3DV3 - SN3168; ConvF(4.23, 4.23, 4.23); Calibrated: 2015-9-28;
- ζ Sensor-Surface: 3mm (Mechanical Surface Detection), $z = 2.0, 32.0$
- ζ Electronics: DAE4 Sn851; Calibrated: 2015-7-20
- ζ Phantom: SAM2; Type: SAM; Serial: TP:1474
- ζ DASY52 52.8.8(1222);

Configuration/d=10mm, Pin=250mW/Area Scan (8x11x1): Measurement grid: $dx=12$ mm, $dy=12$ mm
Maximum value of SAR (measured) = 17.5 W/kg

Configuration/d=10mm, Pin=250mW/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm
Reference Value = 72.75 V/m; Power Drift = 0.17 dB
Peak SAR (extrapolated) = 31.7 W/kg
SAR(1 g) = 14.5 W/kg; SAR(10 g) = 6.42 W/kg
Maximum value of SAR (measured) = 19.5 W/kg

